

# FCC Carrier Aggregation REPORT

## Certification

**Applicant Name:**  
SAMSUNG Electronics Co., Ltd.

**Date of Issue:**  
May 09, 2023

**Address:**  
129, Samsung-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Rep. of Korea

**Location:**  
HCT CO., LTD.,  
74, Seoicheon-ro 578beon-gil, Majang-myeon,  
Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA  
**Report No.:** HCT-RF-2305-FC031

**FCC ID:** A3LSMX818U

**APPLICANT:** SAMSUNG Electronics Co., Ltd.

Model(s): SM-X818U  
 EUT Type: Tablet  
 FCC Classification: PCS Licensed Transmitter (PCB)  
 FCC Rule Part(s): §22, §2

Mode (PCC+SCC)	Tx Frequency (MHz)	Modulation	Emission Designator	ERP	
				Max. Power (dBm)	Max. Power (W)
3 MHz+5 MHz	825.6 - 846.5	QPSK	7M49G7D	21.98	0.158
		16QAM	7M44W7D	21.84	0.153
		64QAM	7M44W7D	21.17	0.131
		256QAM	7M47W7D	20.17	0.104
5 MHz+3 MHz	825.6 - 847.4	QPSK	7M48G7D	22.03	0.160
		16QAM	7M47W7D	21.64	0.146
		64QAM	7M50W7D	21.25	0.133
		256QAM	7M50W7D	20.29	0.107
5 MHz+10 MHz	826.8 - 844.0	QPSK	13M8G7D	21.61	0.145
		16QAM	13M9W7D	20.85	0.122
		64QAM	13M9W7D	19.78	0.095
		256QAM	13M8W7D	16.71	0.047
10 MHz+5 MHz	829.0 - 846.2	QPSK	13M9G7D	21.57	0.144
		16QAM	13M9W7D	20.83	0.121
		64QAM	13M9W7D	19.75	0.094
		256QAM	13M9W7D	16.74	0.047
10 MHz+10 MHz	829.0 - 844.0	QPSK	18M7G7D	21.56	0.143
		16QAM	18M7W7D	20.80	0.120
		64QAM	18M7W7D	19.66	0.092
		256QAM	18M8W7D	16.58	0.045

The measurements shown in this report were made in accordance with the procedures specified in CFR47 section §2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998,21 U.S. C.853(a)

Report No.: HCT-RF-2305-FC031

---

REVIEWED BY



---

Report prepared by : Jae Mun Do  
Engineer of Telecommunication Testing Center

---

Report approved by : Jong Seok Lee  
Manager of Telecommunication Testing Center

This test results were applied only to the test methods required by the standard.

This laboratory is not accredited for the test results marked \*.

The above Test Report is the accredited test result by (KS Q) ISO/IEC 17025 and KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA. (HCT Accreditation No.: KT197)

\* The report shall not be reproduced except in full(only partly) without approval of the laboratory.

## Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-RF-2305-FC031	May 09, 2023	- First Approval Report

The result shown in this test report refer only to the sample(s) tested unless otherwise stated.

## Table of Contents

REVIEWED BY .....	2
1. GENERAL INFORMATION .....	5
2. INTRODUCTION .....	6
2.1. DESCRIPTION OF EUT .....	6
2.2. MEASURING INSTRUMENT CALIBRATION .....	6
2.3. TEST FACILITY .....	6
3. DESCRIPTION OF TESTS.....	7
3.1 TEST PROCEDURE .....	7
3.2 RADIATED POWER.....	8
3.3 RADIATED SPURIOUS EMISSIONS .....	9
3.4 OCCUPIED BANDWIDTH. ....	10
3.5 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL .....	11
3.6 BAND EDGE .....	12
3.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE .....	13
4. LIST OF TEST EQUIPMENT .....	14
5. MEASUREMENT UNCERTAINTY .....	15
6. SUMMARY OF TEST RESULTS .....	16
7. SAMPLE CALCULATION .....	17
8. TEST DATA .....	19
8.1 Conducted Power .....	22
8.2 Equivalent Radiated Power .....	25
8.3 Conducted Spurious Emissions .....	28
8.4 Band Edge.....	41
8.5 Frequency Stability / Variation Of Ambient Temperature .....	57
8.6 Radiated Spurious Emissions.....	62
8.7 Occupied Bandwidth.....	65
8.8 Peak- to- Average Ratio .....	71
9. ANNEX A_ TEST SETUP PHOTO.....	77

# MEASUREMENT REPORT

## 1. GENERAL INFORMATION

<b>Applicant Name:</b>	SAMSUNG Electronics Co., Ltd.
<b>Address:</b>	129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
<b>FCC ID:</b>	A3LSMX818U
<b>Application Type:</b>	Certification
<b>FCC Classification:</b>	PCS Licensed Transmitter (PCB)
<b>FCC Rule Part(s):</b>	§22, §2
<b>EUT Type:</b>	Tablet
<b>Model(s):</b>	SM-X818U
<b>Tx Frequency:</b>	825.6 - 846.5: 3 MHz+5 MHz 825.6 - 847.4: 5 MHz+3 MHz 826.8 - 844.0: 5 MHz+10 MHz 829.0 - 846.2: 10 MHz+5 MHz 829.0 - 844.0: 10 MHz+10 MHz
<b>Date(s) of Tests:</b>	March 13, 2023 ~ April 27, 2023
<b>Serial number:</b>	Radiated: R32W2003H3M Conducted: R32W2003JJD
<b>LTE CA :</b>	CA 5B(Uplink)

## **2. INTRODUCTION**

### **2.1. DESCRIPTION OF EUT**

The EUT was a Tablet with UMTS and LTE, Sub6.

It also supports IEEE 802.11 a/b/g/n/ac/ax (20/40/80/160 MHz), WIFI 6E AIT, Keyboard, S-pen, mmWave.

### **2.2. MEASURING INSTRUMENT CALIBRATION**

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

### **2.3. TEST FACILITY**

The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the **74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.**

### 3. DESCRIPTION OF TESTS

#### 3.1 TEST PROCEDURE

Test Description	Test Procedure Used
Occupied Bandwidth	- KDB 971168 D01 v03r01 – Section 4.3 - ANSI C63.26-2015 – Section 5.4.4
Band Edge	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Spurious and Harmonic Emissions at Antenna Terminal	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Conducted Output Power	- KDB 971168 D01 v03r01 - Section 5.2.4 - ANSI C63.26-2015 - Section 5.2.1 & 5.2.4.2
Peak- to- Average Ratio	- KDB 971168 D01 v03r01 – Section 5.7 - ANSI C63.26-2015 – Section 5.2.3.4
Frequency stability	- ANSI C63.26-2015 – Section 5.6
Effective Radiated Power/ Effective Isotropic Radiated Power	- KDB 971168 D01 v03r01 – Section 5.2 & 5.8 - ANSI/TIA-603-E-2016 – Section 2.2.17
Radiated Spurious and Harmonic Emissions	- KDB 971168 D01 v03r01 – Section 6.2 - ANSI/TIA-603-E-2016 – Section 2.2.12

## 3.2 RADIATED POWER

### Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna in accordance with ANSI/TIA-603-E-2016 Clause 2.2.17.

### Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5 % of the expected OBW, not to exceed 1 MHz
3. VBW ≥ 3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points > 2 x span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

### Test Note

1. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission.
2. A half wave dipole is then substituted in place of the EUT. For emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_d \text{ (dBm)} = P_g \text{ (dBm)} - \text{cable loss (dB)} + \text{antenna gain (dB)}$$

Where:  $P_d$  is the dipole equivalent power and  $P_g$  is the generator output power into the substitution antenna.

3. The maximum value is calculated by adding the forward power to the calibrated source plus its appropriate gain value. These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference between the gain of the horn and an isotropic antenna are taken into consideration
4. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
5. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.



### 3.3 RADIATED SPURIOUS EMISSIONS

#### Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA-603-E-2016.

#### Test Settings

1. RBW = 100 kHz for emissions below 1 GHz and 1 MHz for emissions above 1 GHz
2. VBW  $\geq 3 \times$  RBW
3. Span = 1.5 times the OBW
4. No. of sweep points  $> 2 \times$  span / RBW
5. Detector = Peak
6. Trace mode = Max Hold
7. The trace was allowed to stabilize
8. Test channel : Low/ Middle/ High
9. Frequency range : We are performed all frequency to 10<sup>th</sup> harmonics from 9 kHz.

#### Test Note

1. Measurements value show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin  $> 20$  dB from the applicable limit) and considered that's already beyond the background noise floor.
2. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test data
3. For spurious emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The spurious emissions is calculated by the following formula;


$$\text{Result}_{(dBm)} = P_g_{(dBm)} - \text{cable loss}_{(dB)} + \text{antenna gain}_{(dBi)}$$

Where:  $P_g$  is the generator output power into the substitution antenna.

If the fundamental frequency is below 1 GHz, RF output power has been converted to EIRP.

$$\text{EIRP}_{(dBm)} = \text{ERP}_{(dBm)} + 2.15$$

### 3.4 OCCUPIED BANDWIDTH.

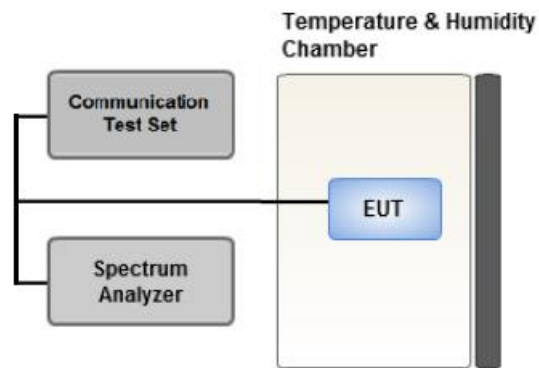

**Test setup**

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

The EUT makes a call to the communication simulator.


The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

#### **Test Settings**

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99 % occupied bandwidth and the 26 dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5 % of the expected OBW
3. VBW  $\geq$  3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5 % of the 99 % occupied bandwidth observed in Step 7

### 3.5 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL

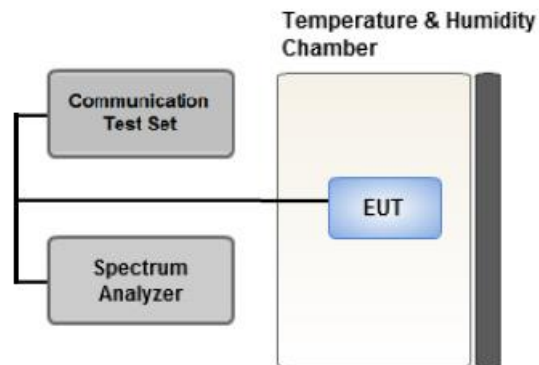

**Test setup**


#### **Test Overview**

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

#### **Test Settings**

1. RBW = 1 MHz
2. VBW  $\geq$  3 MHz
3. Detector = RMS
4. Trace Mode = trace average
5. Sweep time = auto
6. Number of points in sweep  $\geq$  2 x Span / RBW

### 3.6 BAND EDGE

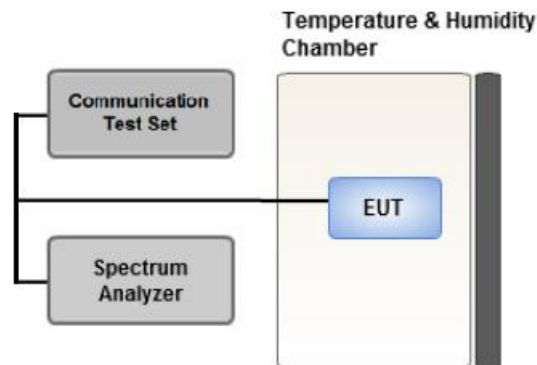

Test setup

#### Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

#### Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW > 1 % of the emission bandwidth
4. VBW > 3 x RBW
5. Detector = RMS
6. Number of sweep points  $\geq 2 \times \text{Span/RBW}$
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize

#### Test Notes


According to FCC 22.917, 24.238, 27.53 specified that power of any emission outside of The authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

All measurements were done at 2 channels(low and high operational frequency range.)

The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

Where Margin < 1 dB the emission level is either corrected by  $10 \log(1 \text{ MHz/ RB})$  or the emission is integrated over a 1 MHz bandwidth to determine the final result. When using the integration method the integration window is either centered on the emission or, for emissions at the band edge, centered by an offset of 500 kHz from the block edge so that the integration window is the 1 MHz adjacent to the block edge.

### 3.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

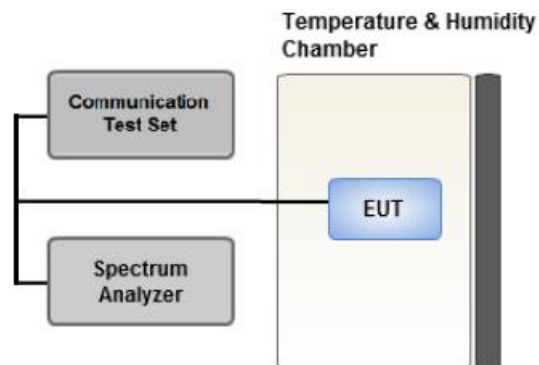

**Test setup**

#### **Test Overview**

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015.

The frequency stability of the transmitter is measured by:

1. Temperature:

The temperature is varied from -30 °C to +50 °C in 10 °C increments using an environmental chamber.

2. Primary Supply Voltage:

- Unless otherwise specified, vary primary supply voltage from 85 % to 115 % of the nominal value for other than hand carried battery equipment.

- For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.

#### **Test Settings**

1. The carrier frequency of the transmitter is measured at room temperature

(20 °C to provide a reference).

2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.

3. Frequency measurements are made at 10 °C intervals ranging from -30 °C to +50 °C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

#### 4. LIST OF TEST EQUIPMENT

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
H.P.F	FBSR-02B(WHK1.2/15 G-10EF)	T&M SYSTEM	-	01/19/2024	Annual
H.P.F	FBSR-02B(WHK3.3/18 G-10EF)	T&M SYSTEM	-	01/19/2024	Annual
Power Splitter(DC ~ 26.5 GHz)	11667B	Hewlett Packard	5001	04/19/2024	Annual
DC Power Supply	E3632A	Agilent	MY40010147	06/21/2023	Annual
Dipole Antenna	UHAP	Schwarzbeck	557	03/09/2025	Biennial
Dipole Antenna	UHAP	Schwarzbeck	558	03/09/2025	Biennial
Chamber	SU-642	ESPEC	93008124	02/22/2024	Annual
Horn Antenna(1 ~ 18 GHz)	BBHA 9120D	Schwarzbeck	147	08/30/2023	Biennial
Horn Antenna(1 ~ 18 GHz)	BBHA 9120D	Schwarzbeck	9120D-1298	09/15/2023	Biennial
Horn Antenna(15 ~ 40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170342	09/29/2024	Biennial
Horn Antenna(15 ~ 40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170124	03/28/2025	Biennial
Signal Analyzer(10 Hz ~ 26.5 GHz)	N9020A	Agilent	MY52090906	04/20/2024	Annual
ATTENUATOR(20 dB)	8493C	Hewlett Packard	17280	04/19/2024	Annual
Spectrum Analyzer(10 Hz ~ 40 GHz)	FSV40	REOHDE & SCHWARZ	100931	08/29/2023	Annual
Base Station	8960 (E5515C)	Agilent	MY48360800	08/18/2023	Annual
Loop Antenna(9 kHz ~ 30 MHz)	FMZB1513	Schwarzbeck	1513-333	03/17/2024	Biennial
Trilog Broadband Antenna	VULB9168	Schwarzbeck	895	08/16/2024	Biennial
Trilog Broadband Antenna	VULB9168	Schwarzbeck	1135	03/21/2024	Biennial
Wideband Radio Communication Tester	MT8821C	Anritsu Corp.	6262094331	12/01/2023	Annual
Wideband Radio Communication Tester	MT8820C	Anritsu Corp.	6201026545	01/05/2024	Annual
SIGNAL GENERATOR (100 kHz ~ 40 GHz)	SMB100A	REOHDE & SCHWARZ	177633	07/05/2023	Annual
Signal Analyzer(5 Hz ~ 40.0 GHz)	N9030B	KEYSIGHT	MY55480167	05/30/2023	Annual
FCC LTE Mobile Conducted RF Automation Test Software	-	HCT CO., LTD.,	-	-	-

**Note:**

1. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
2. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

## 5. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014. All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the  $U_{\text{CISPR}}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty ( $\pm$ dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.90 (Confidence level about 95 %, $k=2$ )
Radiated Disturbance (9 kHz ~ 30 MHz)	4.14 (Confidence level about 95 %, $k=2$ )
Radiated Disturbance (30 MHz ~ 1 GHz)	5.82 (Confidence level about 95 %, $k=2$ )
Radiated Disturbance (1 GHz ~ 18 GHz)	5.74 (Confidence level about 95 %, $k=2$ )
Radiated Disturbance (18 GHz ~ 40 GHz)	5.76 (Confidence level about 95 %, $k=2$ )
Radiated Disturbance (Above 40 GHz)	5.52 (Confidence level about 95 %, $k=2$ )

## 6. SUMMARY OF TEST RESULTS

### 6.1 Test Condition : Conducted Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Occupied Bandwidth	§2.1049	N/A	PASS
Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	§2.1051, §22.917(a)	< 43 + 10log10 (P[Watts]) at Band Edge and for all out-of-band emissions	PASS
Conducted Output Power	§2.1046	N/A	PASS
Peak- to- Average Ratio	§22.913(d)	< 13 dB	PASS
Frequency stability / variation of ambient temperature	§2.1055, §22.355	< 2.5 ppm	PASS

### 6.2 Test Condition : Radiated Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Effective Radiated Power	§22.913(a)(5)	< 7 Watts max. ERP	PASS
Radiated Spurious and Harmonic Emissions	§2.1053, §22.917(a)	< 43 + 10log10 (P[Watts]) for all out-of band emissions	PASS



## 7. SAMPLE CALCULATION

### 7.1 ERP Sample Calculation

Ch./ Freq.		Measured Level(dBm)	Substitute Level(dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
channel	Freq.(MHz)						W	dBm
128	824.20	-21.37	38.40	-10.61	0.95	H	0.483	26.84

**ERP = Substitute LEVEL(dBm) + Ant. Gain – CL(Cable Loss)**

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter’s level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter’s level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power.

### 7.2 EIRP Sample Calculation

Ch./ Freq.		Measured Level(dBm)	Substitute Level(dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
channel	Freq.(MHz)						W	dBm
20175	1,732.50	-15.75	18.45	9.90	1.76	H	0.456	26.59

**EIRP = Substitute LEVEL(dBm) + Ant. Gain – CL(Cable Loss)**

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter’s level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter’s level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of equivalent isotropic radiated power.

### 7.3. Emission Designator

#### GSM Emission Designator

**Emission Designator = 249KGXW**

GSM BW = 249 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

#### EDGE Emission Designator

**Emission Designator = 249KG7W**

GSM BW = 249 kHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination (Audio/Data)

#### WCDMA Emission Designator

**Emission Designator = 4 M17F9W**

WCDMA BW = 4.17 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

#### QPSK Modulation

**Emission Designator = 4 M48G7D**

LTE BW = 4.48 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

#### QAM Modulation

Emission Designator = 4 M48W7D

LTE BW = 4.48 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

## 8. TEST DATA

### Test Overview

The EUT is set up to transmit two contiguous LTE channels. The power level of both carriers and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10<sup>th</sup> harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

### Test Note

1. All tests were evaluated for the two contiguous channels using various combinations of RB size, RB offset, modulation, and channel bandwidth.
2. Channel bandwidth is shown in the tables below based only on the channel bandwidths that were supported in this device.

<b>Channel Bandwidth (PCC)</b>	<b>Channel Bandwidth (SCC)</b>	<b>Maximum aggregated bandwidth (MHz)</b>
3	5	8
5	3	8
5	10	15
10	5	15
10	10	20

3. All modes of operation were investigated and the worst case configuration results are reported in this section.

Please refer to the table below.

- Worst case(Conducted Spurious Emissions, Band Edge)  
: We have selected higher of the Conduction Output Power.
- Worst case(Radiated Spurious Emissions) : We have selected higher of the ERP.
- Worst case(OBW, Frequency stability)  
: All modes of operation were investigated and the worst case configuration results are reported.

4. All modes of operation were investigated and the worst case configuration results are reported.

Mode : Stand alone, Stand alone + External accessories (Earphone, AC adapter, etc)

Worst case : Stand alone

5. We were performed the RSE test in condition of co-location.

Mode : Stand alone, Simultaneous transmission scenarios

Worst case : Stand alone

6. All 3 channels(low/mid/high) of conducted power and radiated power were investigated

and the worst case channel results are reported.

[ Worst case ]

Test Description	Mod	Operating frequency	PCC					SCC				
			BW (MHz)	Freq. (MHz)	Ch.	RB	RB Offset	BW (MHz)	Freq. (MHz)	Ch.	RB	RB Offset
Conducted Spurious Emissions/ Band Edge	QPSK	Low	5	826.8	20428	1	24	10	834.0	20500	1	0
	QPSK	Mid	5	831.8	20478	1	24	10	839.0	20550	1	0
	QPSK	High	5	836.8	20528	1	24	10	844.0	20600	1	0
	QPSK	Low	5	826.8	20428	1	0	10	834.0	20500	1	49
	QPSK	Mid	5	831.8	20478	1	0	10	839.0	20550	1	49
	QPSK	High	5	836.8	20528	1	0	10	844.0	20600	1	49
	QPSK	Low	5	826.5	20425	25	0	3	830.4	20464	15	0
	QPSK	Mid	5	835.0	20510	25	0	3	838.9	20549	15	0
	QPSK	High	5	843.5	20595	25	0	3	847.4	20634	15	0
	QPSK	Low	10	829.0	20450	50	0	10	838.9	20549	50	0
	QPSK	Mid	10	831.6	20476	50	0	10	841.5	20575	50	0
	QPSK	High	10	834.1	20501	50	0	10	844.0	20600	50	0
Radiated Spurious Emissions	QPSK	Low	10	829.0	20450	1	49	5	836.2	20522	1	0
	QPSK	Mid	5	835.0	20510	1	24	3	838.9	20549	1	0
	QPSK	High	3	842.6	20586	1	14	5	846.5	20625	1	0

[ Worst case ]

Test Description	Mod	Operating frequency	PCC					SCC				
			BW (MHz)	Freq. (MHz)	Ch.	RB	RB Offset	BW (MHz)	Freq. (MHz)	Ch.	RB	RB Offset
OBW, PAR	QPSK, 16QAM, 64QAM, 256QAM	Mid	3	834.1	20501	15	0	5	838.0	20540	25	0
			5	835.0	20510	25	0	3	838.9	20549	15	0
			5	831.8	20478	25	0	10	839.0	20550	50	0
			10	834.0	20500	50	0	5	841.2	20572	25	0
			10	831.6	20476	50	0	10	841.5	20575	50	0
Frequency stability	QPSK	Mid	3	834.1	20501	15	0	5	838.0	20540	25	0
			5	835.0	20510	25	0	3	838.9	20549	15	0
			5	831.8	20478	25	0	10	839.0	20550	50	0
			10	834.0	20500	50	0	5	841.2	20572	25	0
			10	831.6	20476	50	0	10	841.5	20575	50	0

**8.1 Conducted Power**

Operating frequency	PCC					SCC					Conducted. Power [dBm]
	Bandwidth [MHz]	Freq. (MHz)	Channel	RB	RB Offset	Bandwidth [MHz]	Freq. (MHz)	Channel	RB	RB Offset	
Low	3	825.6	20416	1	14	5	829.5	20455	1	0	23.62
	5	826.5	20425	1	24	3	830.4	20464	1	0	23.46
	<b>5</b>	<b>826.8</b>	<b>20428</b>	<b>1</b>	<b>24</b>	<b>10</b>	<b>834.0</b>	<b>20500</b>	<b>1</b>	<b>0</b>	<b>23.65</b>
	10	829.0	20450	1	49	5	836.2	20522	1	0	23.18
	10	829.0	20450	1	49	10	838.9	20549	1	0	23.11
Mid	3	834.1	20501	1	14	5	838.0	20540	1	0	23.23
	5	835.0	20510	1	24	3	838.9	20549	1	0	23.22
	<b>5</b>	<b>831.8</b>	<b>20478</b>	<b>1</b>	<b>24</b>	<b>10</b>	<b>839.0</b>	<b>20550</b>	<b>1</b>	<b>0</b>	<b>23.24</b>
	10	834.0	20500	1	49	5	841.2	20572	1	0	23.10
	10	831.6	20476	1	49	10	841.5	20575	1	0	23.03
High	3	842.6	20586	1	14	5	846.5	20625	1	0	23.40
	5	843.5	20595	1	24	3	847.4	20634	1	0	23.33
	<b>5</b>	<b>836.8</b>	<b>20528</b>	<b>1</b>	<b>24</b>	<b>10</b>	<b>844.0</b>	<b>20600</b>	<b>1</b>	<b>0</b>	<b>23.42</b>
	10	839.0	20550	1	49	5	846.2	20622	1	0	23.17
	10	834.1	20501	1	49	10	844.0	20600	1	0	23.08

Note:

Modulation : QPSK(1RB)

Operating frequency	PCC					SCC					Conducted. Power [dBm]
	Bandwidth [MHz]	Freq. (MHz)	Channel	RB	RB Offset	Bandwidth [MHz]	Freq. (MHz)	Channel	RB	RB Offset	
Low	3	825.6	20416	15	0	5	829.5	20455	25	0	23.58
	<b>5</b>	<b>826.5</b>	<b>20425</b>	<b>25</b>	<b>0</b>	<b>3</b>	<b>830.4</b>	<b>20464</b>	<b>15</b>	<b>0</b>	<b>23.70</b>
	5	826.8	20428	25	0	10	834.0	20500	50	0	21.43
	10	829.0	20450	50	0	5	836.2	20522	25	0	21.33
	10	829.0	20450	50	0	10	838.9	20549	50	0	21.40
Mid	3	834.1	20501	15	0	5	838.0	20540	25	0	23.30
	<b>5</b>	<b>835.0</b>	<b>20510</b>	<b>25</b>	<b>0</b>	<b>3</b>	<b>838.9</b>	<b>20549</b>	<b>15</b>	<b>0</b>	<b>23.38</b>
	5	831.8	20478	25	0	10	839.0	20550	50	0	21.33
	10	834.0	20500	50	0	5	841.2	20572	25	0	21.30
	10	831.6	20476	50	0	10	841.5	20575	50	0	21.29
High	3	842.6	20586	15	0	5	846.5	20625	25	0	23.46
	<b>5</b>	<b>843.5</b>	<b>20595</b>	<b>25</b>	<b>0</b>	<b>3</b>	<b>847.4</b>	<b>20634</b>	<b>15</b>	<b>0</b>	<b>23.48</b>
	5	836.8	20528	25	0	10	844.0	20600	50	0	21.23
	10	839.0	20550	50	0	5	846.2	20622	25	0	21.30
	10	834.1	20501	50	0	10	844.0	20600	50	0	21.26

Note:

Modulation : QPSK(Full RB)

Operating frequency	PCC					SCC					Conducted. Power [dBm]
	Bandwidth [MHz]	Freq. (MHz)	Channel	RB	RB Offset	Bandwidth [MHz]	Freq. (MHz)	Channel	RB	RB Offset	
Low	5	826.8	20428	1	24	10	834.0	20500	1	0	22.70
Mid	5	831.8	20478	1	24	10	839.0	20550	1	0	22.57
High	5	836.8	20528	1	24	10	844.0	20600	1	0	22.46
Low	5	826.5	20425	25	0	3	830.4	20464	15	0	23.60
Mid	5	835.0	20510	25	0	3	838.9	20549	15	0	23.37
High	5	843.5	20595	25	0	3	847.4	20634	15	0	23.46

Note:

Modulation : 16QAM

Operating frequency	PCC					SCC					Conducted. Power [dBm]
	Bandwidth [MHz]	Freq. (MHz)	Channel	RB	RB Offset	Bandwidth [MHz]	Freq. (MHz)	Channel	RB	RB Offset	
Low	5	826.8	20428	1	24	10	834.0	20500	1	0	21.51
Mid	5	831.8	20478	1	24	10	839.0	20550	1	0	21.52
High	5	836.8	20528	1	24	10	844.0	20600	1	0	21.48
Low	5	826.5	20425	25	0	3	830.4	20464	15	0	23.54
Mid	5	835.0	20510	25	0	3	838.9	20549	15	0	23.28
High	5	843.5	20595	25	0	3	847.4	20634	15	0	23.20

Note:

Modulation : 64QAM

Operating frequency	PCC					SCC					Conducted. Power [dBm]
	Bandwidth [MHz]	Freq. (MHz)	Channel	RB	RB Offset	Bandwidth [MHz]	Freq. (MHz)	Channel	RB	RB Offset	
Low	5	826.8	20428	1	24	10	834.0	20500	1	0	18.60
Mid	5	831.8	20478	1	24	10	839.0	20550	1	0	18.56
High	5	836.8	20528	1	24	10	844.0	20600	1	0	18.24
Low	5	826.5	20425	25	0	3	830.4	20464	15	0	22.57
Mid	5	835.0	20510	25	0	3	838.9	20549	15	0	22.31
High	5	843.5	20595	25	0	3	847.4	20634	15	0	22.19

Note:

Modulation : 256QAM



**8.2 Equivalent Radiated Power**

	PCC			SCC			Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol.	E.R.P	
	BW [MHz]	Channel	RB/Offset	BW [MHz]	Channel	RB/Offset						W	dBm
<b>Low</b>	3	20416	1/14	5	20455	1/0	-28.62	32.53	-9.94	1.42	H	0.131	21.17
	5	20425	1/24	3	20464	1/0	-28.54	32.61	-9.94	1.42	H	0.133	21.25
	5	20428	1/24	10	20500	1/0	-28.48	32.68	-9.94	1.42	H	0.135	21.32
	<b>10</b>	<b>20450</b>	<b>1/49</b>	<b>5</b>	<b>20522</b>	<b>1/0</b>	<b>-28.38</b>	<b>32.79</b>	<b>-9.94</b>	<b>1.42</b>	<b>H</b>	<b>0.139</b>	<b>21.43</b>
	10	20450	1/49	10	20549	1/0	-28.41	32.73	-9.94	1.42	H	0.137	21.37
<b>Mid</b>	3	20501	1/14	5	20540	1/0	-27.76	33.35	-9.94	1.43	H	0.158	21.98
	<b>5</b>	<b>20510</b>	<b>1/24</b>	<b>3</b>	<b>20549</b>	<b>1/0</b>	<b>-27.66</b>	<b>33.40</b>	<b>-9.94</b>	<b>1.43</b>	<b>H</b>	<b>0.160</b>	<b>22.03</b>
	5	20478	1/24	10	20550	1/0	-28.25	32.88	-9.94	1.43	H	0.142	21.51
	10	20500	1/49	5	20572	1/0	-28.15	32.94	-9.94	1.43	H	0.144	21.57
	10	20476	1/49	10	20575	1/0	-28.24	32.85	-9.94	1.43	H	0.140	21.48
<b>High</b>	<b>3</b>	<b>20586</b>	<b>1/14</b>	<b>5</b>	<b>20625</b>	<b>1/0</b>	<b>-28.04</b>	<b>33.22</b>	<b>-9.93</b>	<b>1.43</b>	<b>H</b>	<b>0.153</b>	<b>21.86</b>
	5	20595	1/24	3	20634	1/0	-28.20	33.01	-9.93	1.43	H	0.146	21.65
	5	20528	1/24	10	20600	1/0	-28.19	32.98	-9.94	1.43	H	0.145	21.61
	10	20550	1/49	5	20622	1/0	-28.31	32.91	-9.93	1.43	H	0.143	21.55
	10	20501	1/49	10	20600	1/0	-28.24	32.93	-9.94	1.43	H	0.143	21.56

Note:

1. Modulation : QPSK
2. Limit : < 7 Watts

PCC			SCC			Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol.	E.R.P	
BW [MHz]	Channel	RB/Offset	BW [MHz]	Channel	RB/Offset						W	dBm
10	20450	1/49	5	20522	1/0	-28.98	32.19	-9.94	1.42	H	0.121	20.83
3	20501	1/14	5	20540	1/0	-28.21	32.90	-9.94	1.43	H	0.14	21.53
5	20510	1/24	3	20549	1/0	-28.05	33.01	-9.94	1.43	H	0.15	21.64
5	20478	1/24	10	20550	1/0	-28.91	32.22	-9.94	1.43	H	0.12	20.85
10	20500	1/49	5	20572	1/0	-28.96	32.13	-9.94	1.43	H	0.12	20.76
10	20476	1/49	10	20575	1/0	-28.92	32.17	-9.94	1.43	H	0.12	20.80
3	20586	1/14	5	20625	1/0	-28.06	33.20	-9.93	1.43	H	0.15	21.84

Note:

1. Modulation : 16QAM
2. Limit : < 7 Watts

PCC			SCC			Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol.	E.R.P	
BW [MHz]	Channel	RB/Offset	BW [MHz]	Channel	RB/Offset						W	dBm
10	20450	1/49	5	20522	1/0	-30.08	31.09	-9.94	1.42	H	0.094	19.73
3	20501	1/14	5	20540	1/0	-28.57	32.54	-9.94	1.43	H	0.13	21.17
5	20510	1/24	3	20549	1/0	-28.44	32.62	-9.94	1.43	H	0.13	21.25
5	20478	1/24	10	20550	1/0	-29.98	31.15	-9.94	1.43	H	0.10	19.78
10	20500	1/49	5	20572	1/0	-29.97	31.12	-9.94	1.43	H	0.09	19.75
10	20476	1/49	10	20575	1/0	-30.06	31.03	-9.94	1.43	H	0.09	19.66
3	20586	1/14	5	20625	1/0	-29.01	32.25	-9.93	1.43	H	0.12	20.89

Note:

1. Modulation : 64QAM
2. Limit : < 7 Watts

PCC			SCC			Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol.	E.R.P	
BW [MHz]	Channel	RB/Offset	BW [MHz]	Channel	RB/Offset						W	dBm
10	20450	1/49	5	20522	1/0	-33.09	28.08	-9.94	1.42	H	0.047	16.72
3	20501	1/14	5	20540	1/0	-29.57	31.54	-9.94	1.43	H	0.10	20.17
5	20510	1/24	3	20549	1/0	-29.40	31.66	-9.94	1.43	H	0.11	20.29
5	20478	1/24	10	20550	1/0	-33.05	28.08	-9.94	1.43	H	0.05	16.71
10	20500	1/49	5	20572	1/0	-32.98	28.11	-9.94	1.43	H	0.05	16.74
10	20476	1/49	10	20575	1/0	-33.14	27.95	-9.94	1.43	H	0.05	16.58
3	20586	1/14	5	20625	1/0	-29.92	31.34	-9.93	1.43	H	0.10	19.98

Note:

1. Modulation : 256QAM
2. Limit : < 7 Watts

**8.3 Conducted Spurious Emissions**

Operating frequency	PCC				SCC				Measurement Maximum Frequency (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)
	BW [MHz]	Ch.	Freq. (MHz)	RB/Offset	BW [MHz]	Ch.	Freq. (MHz)	RB/Offset				
Low	5	20428	826.8	1/24	10	20500	834.0	1/0	8.2777	28.591	-75.30	-46.71
Mid	5	20478	831.8	1/24	10	20550	839.0	1/0	9.1750	28.591	-75.59	-47.00
High	5	20528	836.8	1/24	10	20600	844.0	1/0	3.8206	27.976	-75.56	-47.59
Low	5	20428	826.8	1/0	10	20500	834.0	1/49	4.9303	27.976	-75.90	-47.92
Mid	5	20478	831.8	1/0	10	20550	839.0	1/49	3.8131	27.976	-76.28	-48.31
High	5	20528	836.8	1/0	10	20600	844.0	1/49	8.8375	28.591	-75.54	-46.95
Low	5	20425	826.5	25/0	3	20464	830.4	15/0	8.2543	28.591	-75.60	-47.01
Mid	5	20510	835.0	25/0	3	20549	838.9	15/0	3.7912	27.976	-76.20	-48.22
High	5	20595	843.5	25/0	3	20634	847.4	15/0	9.1830	28.591	-75.56	-46.97
Low	10	20450	829.0	50/0	10	20549	838.9	50/0	8.2582	28.591	-75.34	-46.75
Mid	10	20476	831.6	50/0	10	20575	841.5	50/0	3.7618	27.976	-75.91	-47.94
High	10	20501	834.1	50/0	10	20600	844.0	50/0	8.8594	28.591	-75.74	-47.15

Note:


1. Modulation : QPSK
2. Factor(dB) = Cable Loss + Ext. Attenuator + Power Splitter
3. Factors for frequency :

Frequency Range (GHz)	Factor [dB]
0.03 – 1	25.270
1 – 5	27.976
5 – 10	28.591
10 – 15	29.116
15 – 20	29.489
Above 20(26.5)	30.131


4. Limit : -13.0 dBm

Frequency Range : 30 MHz ~ 10 GHz


PCC 5 MHz Ch20425 RB25 Offset0 SCC 3 MHz Ch20464 RB15 Offset0

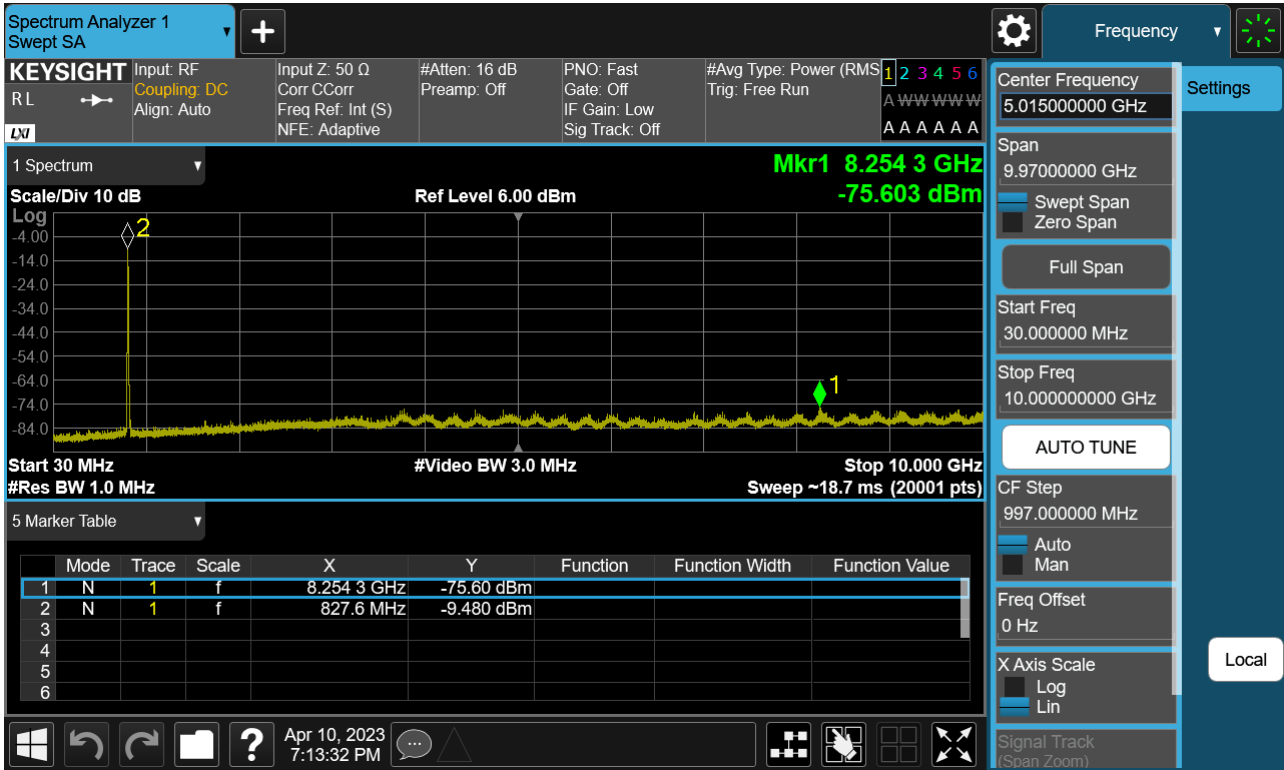


PPCC 5 MHz Ch20428 RB1 Offset0 SCC 10 MHz Ch20500 RB1 Offset49

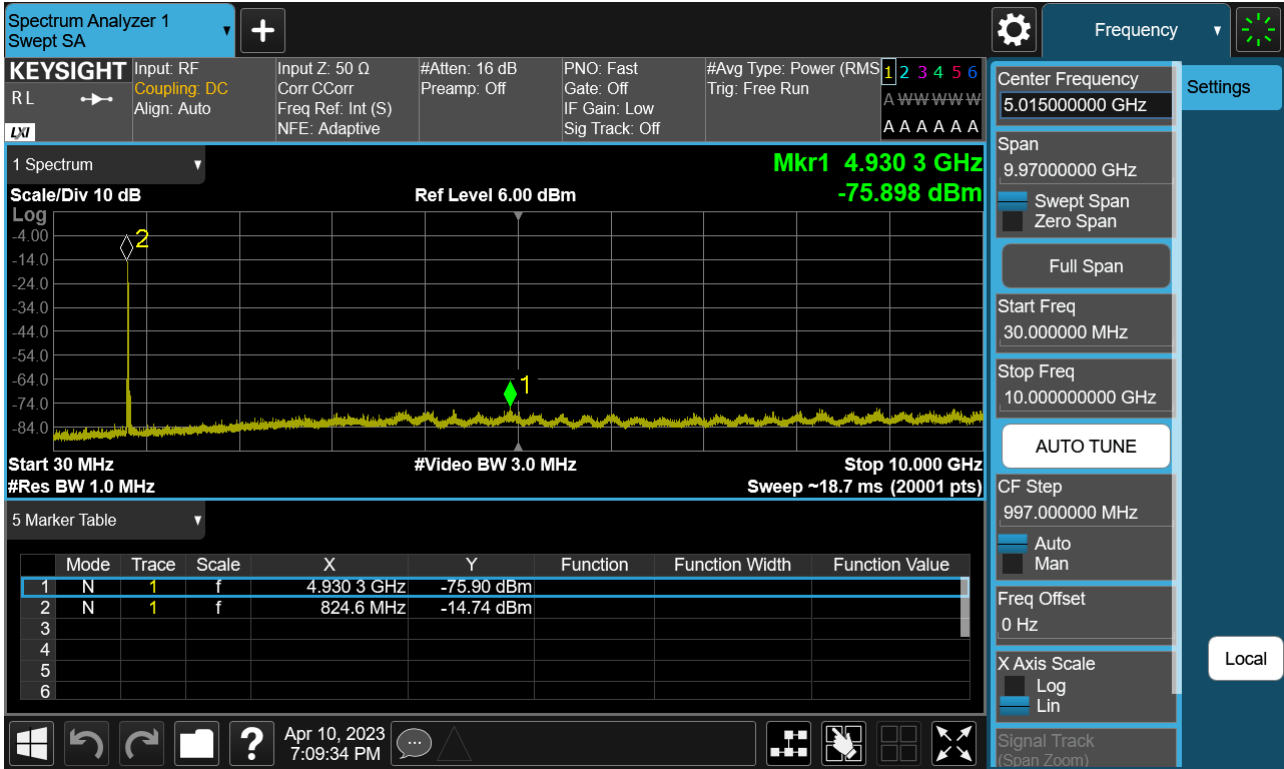

PCC 5 MHz Ch20428 RB1 Offset24 SCC 10 MHz Ch20500 RB1 Offset0

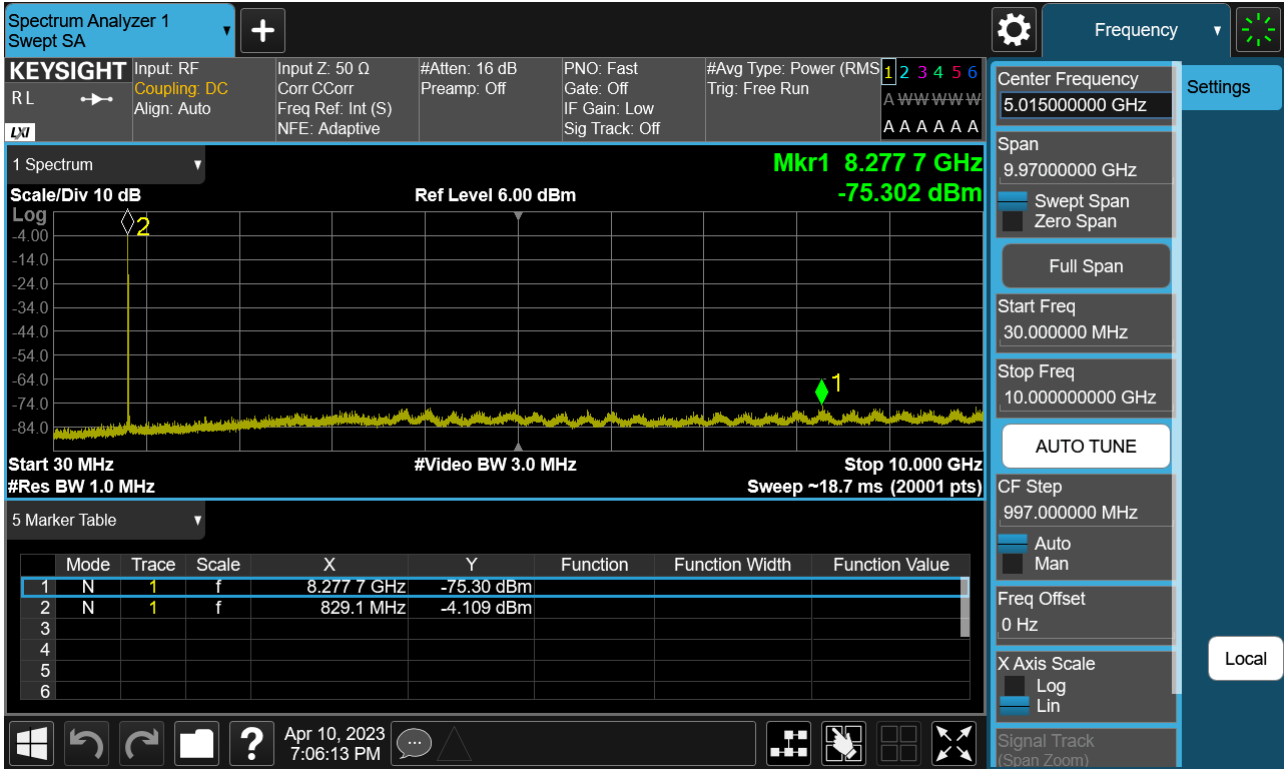


PCC 5 MHz Ch20478 RB1 Offset0 SCC 10 MHz Ch20550 RB1 Offset49

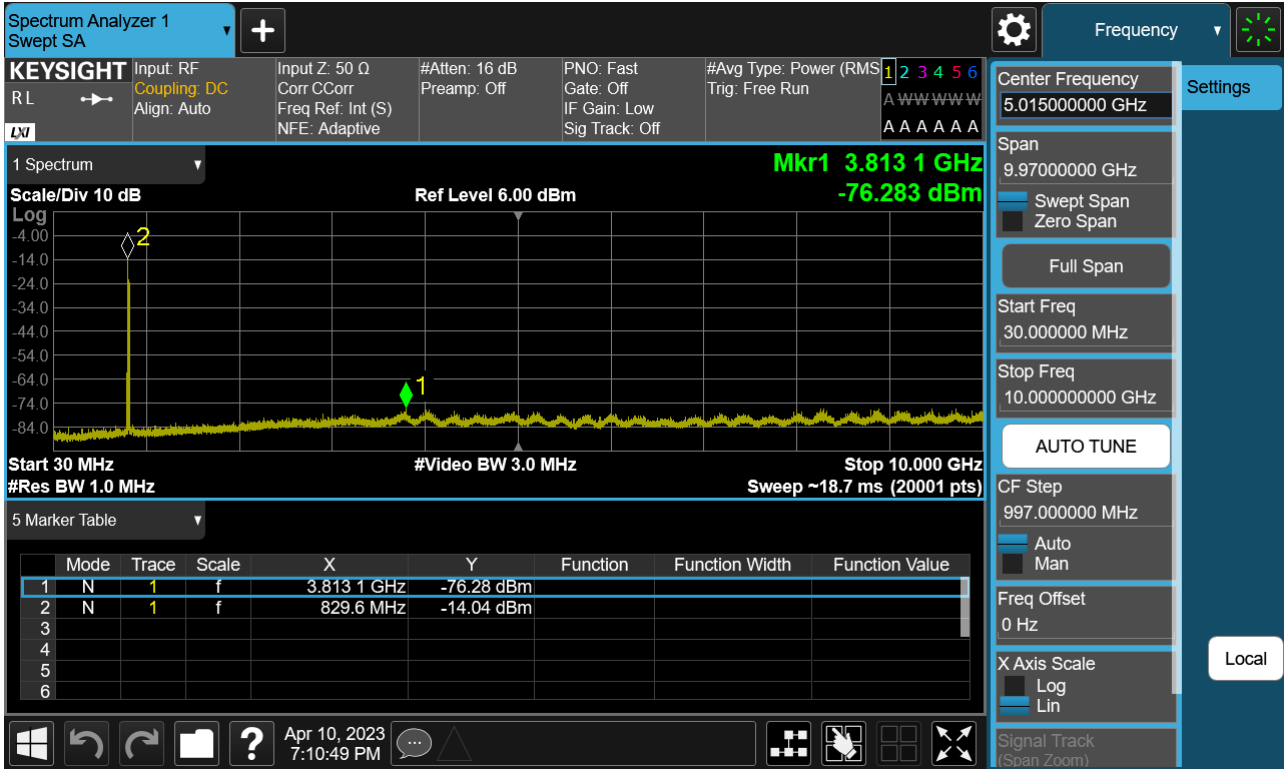




PCC 5 MHz Ch20478 RB1 Offset24 SCC 10 MHz Ch20550 RB1 Offset0

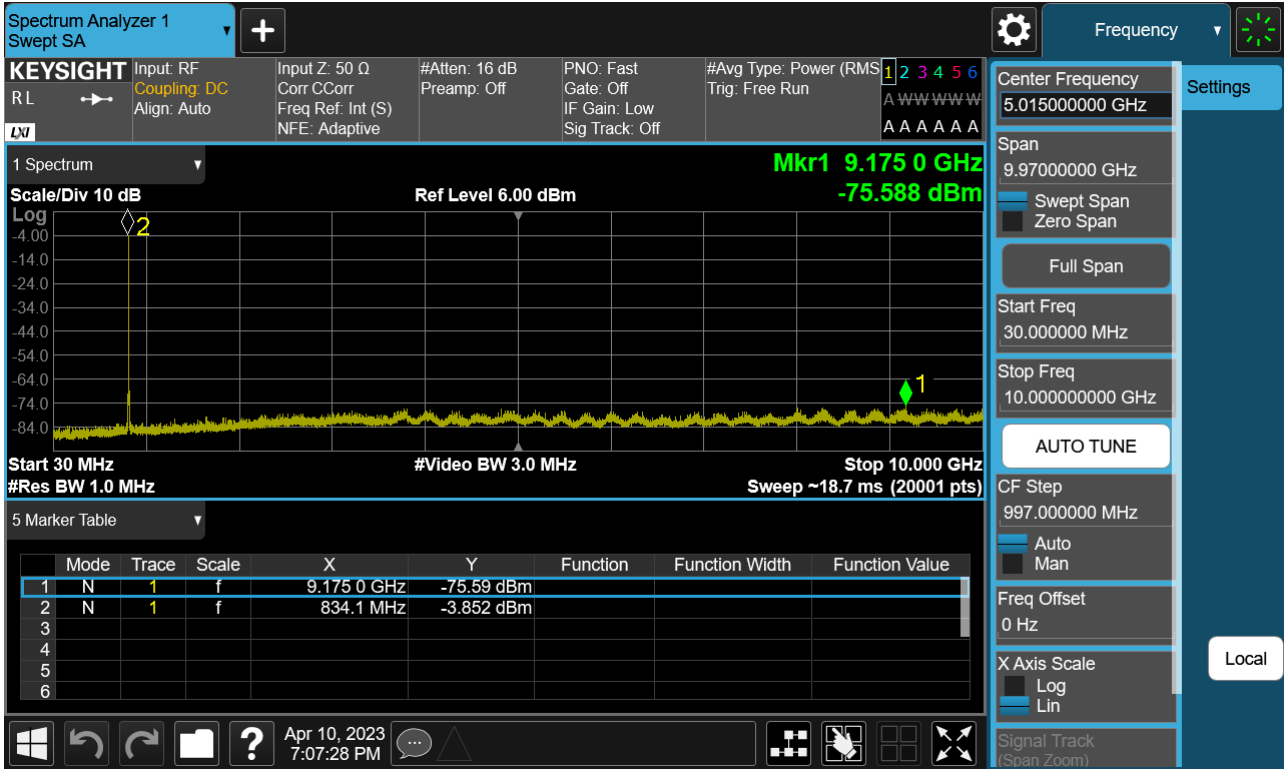

PCC 5 MHz Ch20510 RB25 Offset0 SCC 3 MHz Ch20549 RB15 Offset0

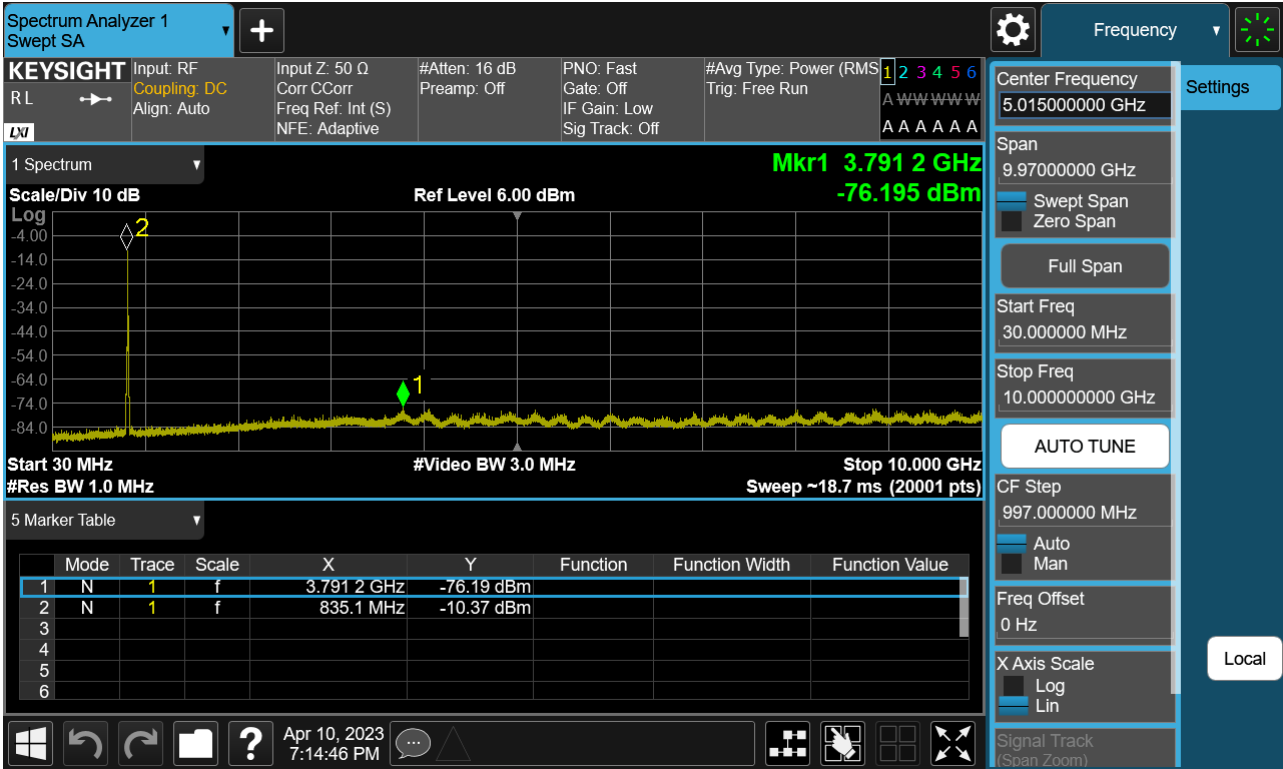


PCC 5 MHz Ch20528 RB1 Offset0 SCC 10 MHz Ch20600 RB1 Offset49




PCC 5 MHz Ch20528 RB1 Offset24 SCC 10 MHz Ch20600 RB1 Offset0




PCC 5 MHz Ch20595 RB25 Offset0 SCC 3 MHz Ch20634 RB15 Offset0

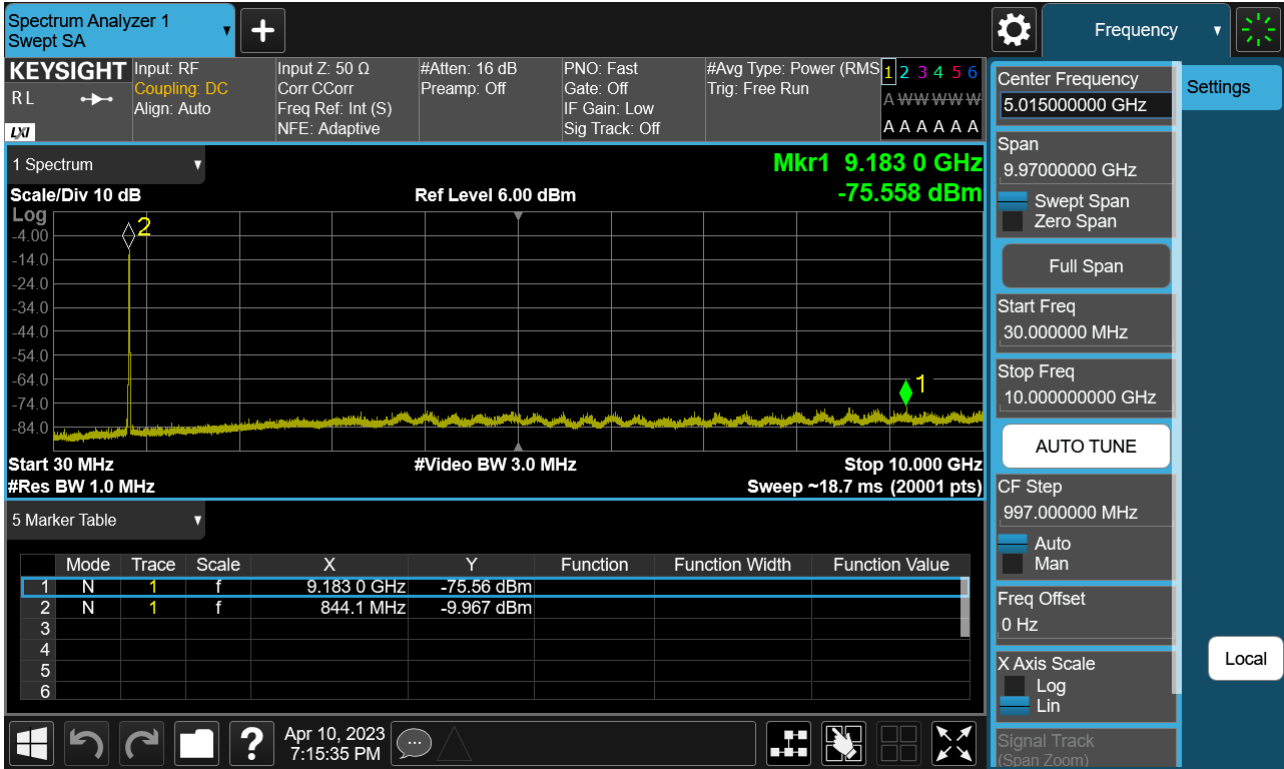


PCC 10 MHz Ch20450 RB50 Offset0 SCC 10 MHz Ch20549 RB50 Offset0

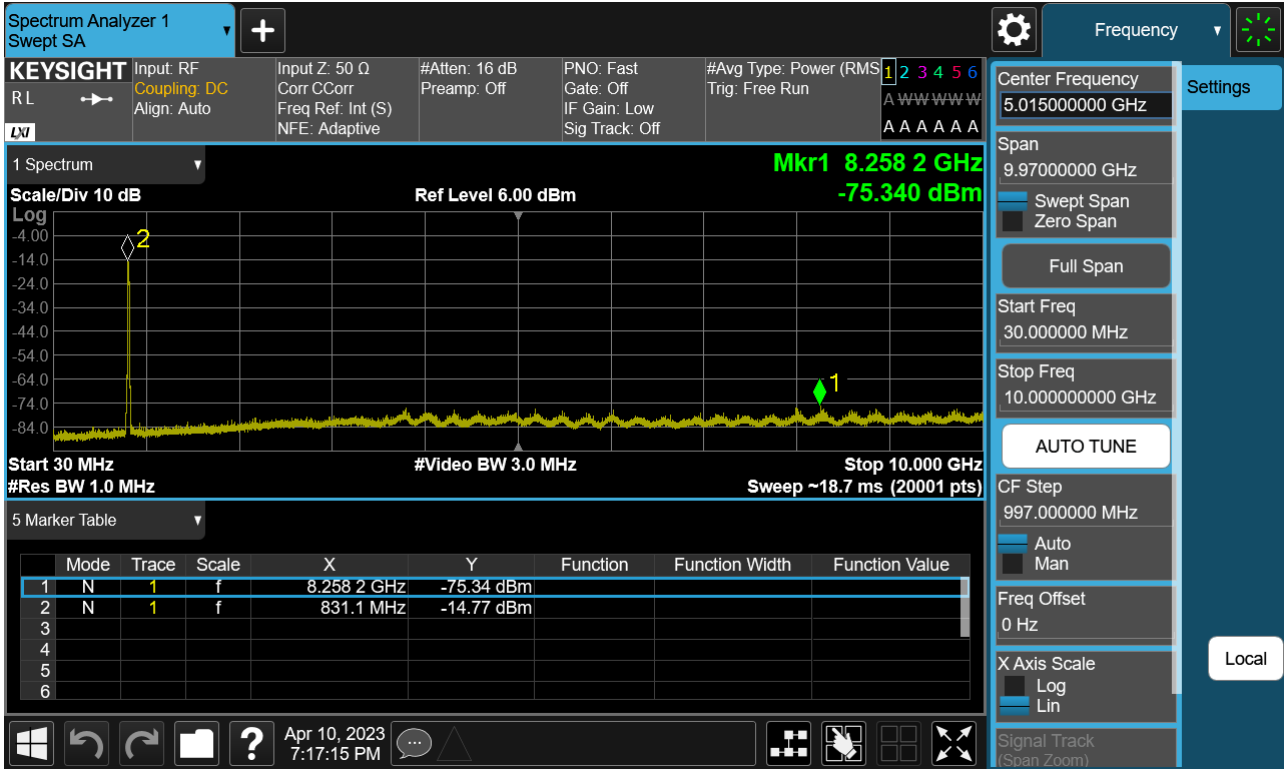

PCC 10 MHz Ch20476 RB50 Offset0 SCC 10 MHz Ch20575 RB50 Offset0

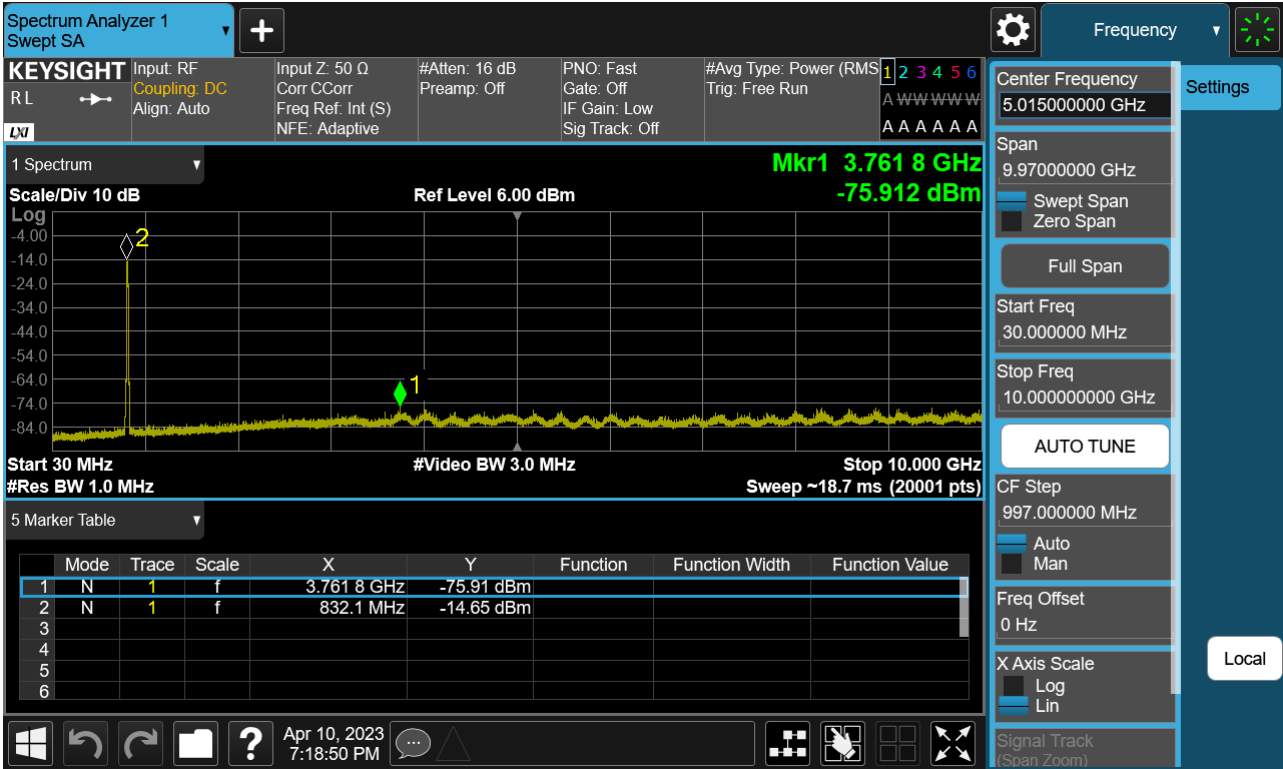


PCC 10 MHz Ch20501 RB50 Offset0 SCC 10 MHz Ch20600 RB50 Offset0

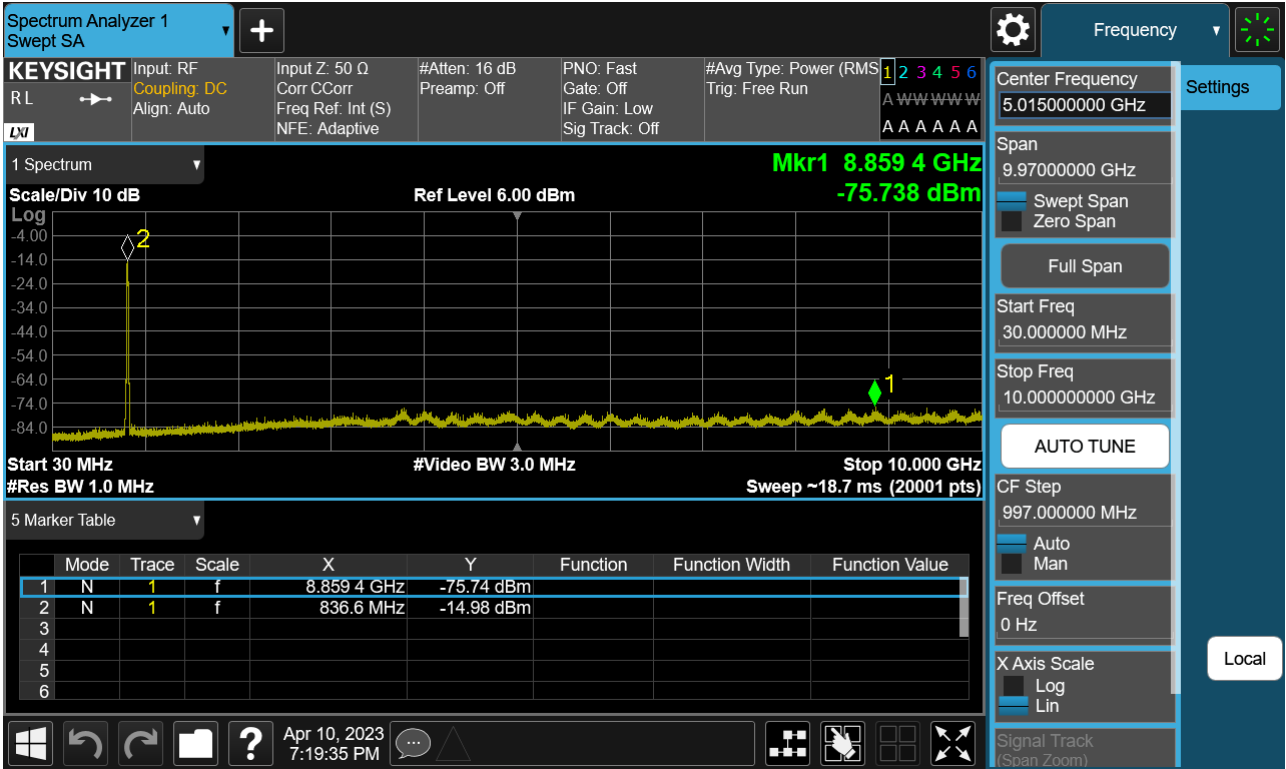




**8.4 Band Edge**


Highest Channel\_PCC 5 MHz Ch20528 RB1 Offset0 SCC 10 MHz Ch20600 RB1 Offset49(1)

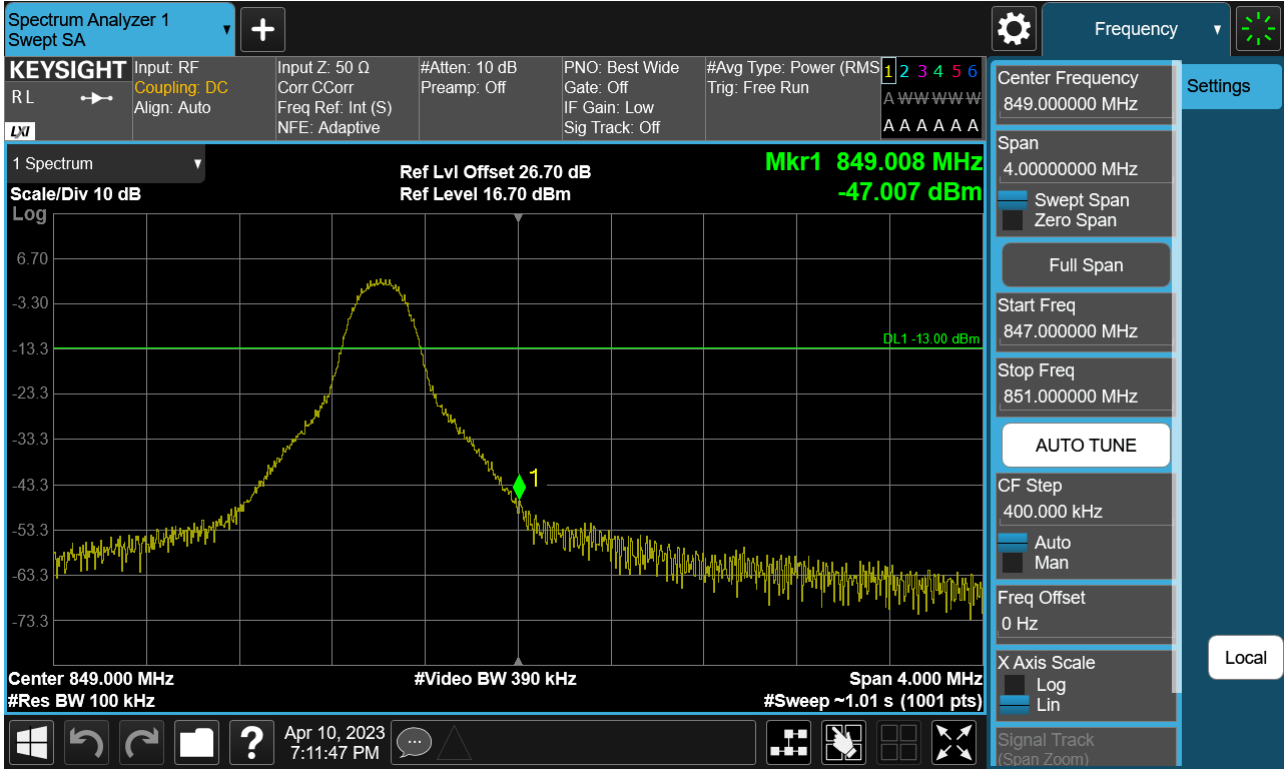


Highest Channel\_PCC 5 MHz Ch20528 RB1 Offset0 SCC 10 MHz Ch20600 RB1 Offset49(2)

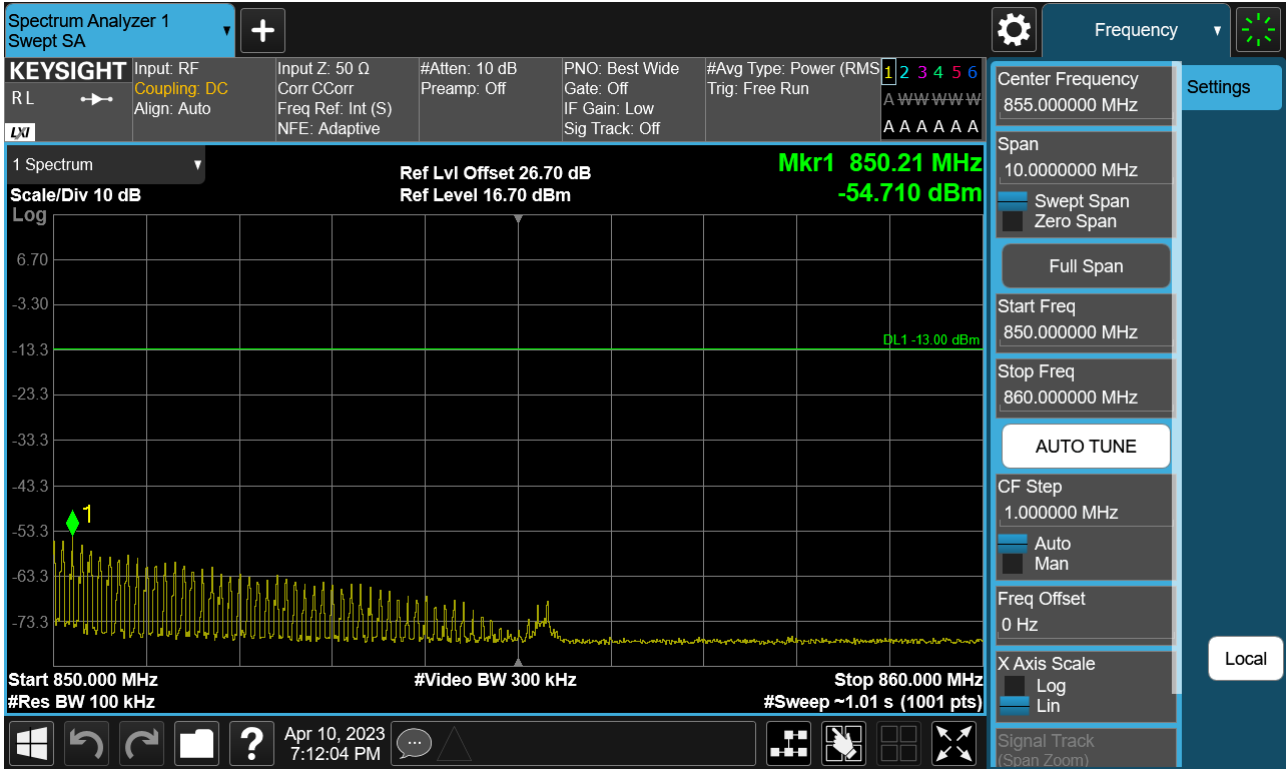


Highest Channel\_PCC 5 MHz Ch20528 RB1 Offset24 SCC 10 MHz Ch20600 RB1 Offset0(1)

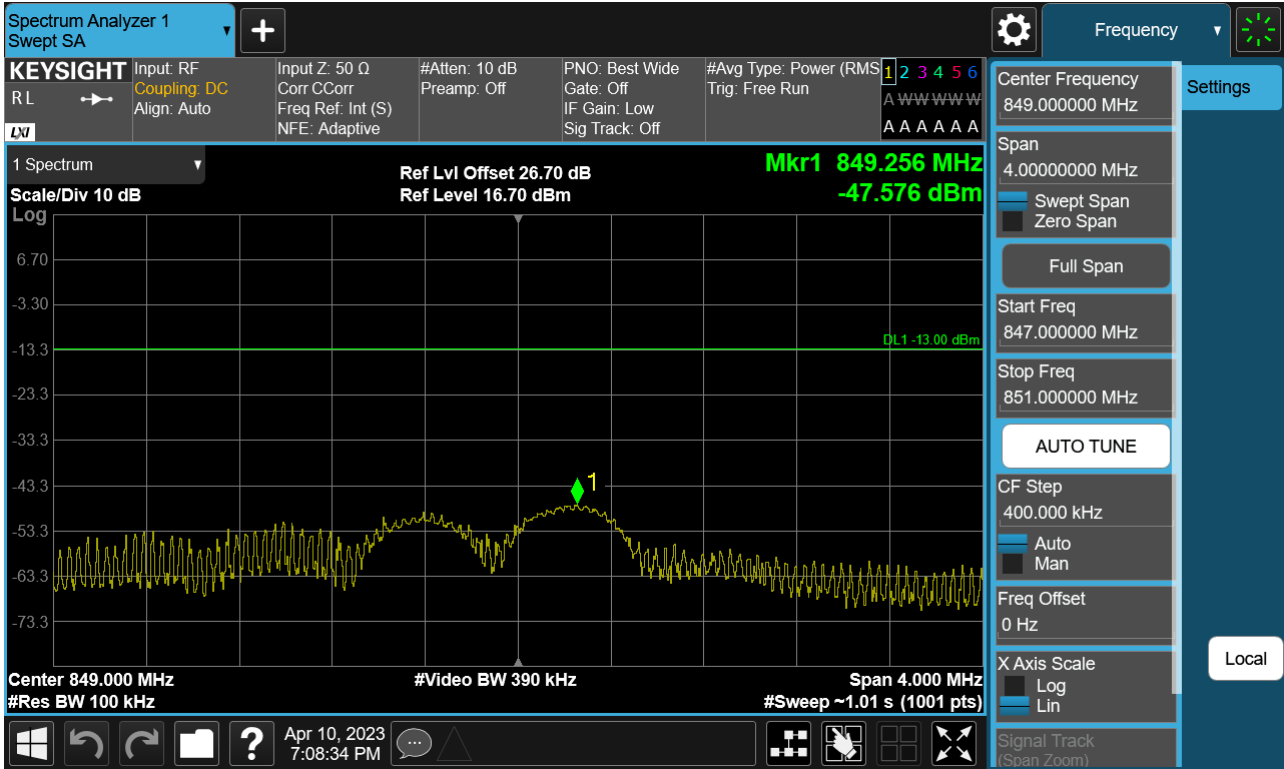


Highest Channel\_PCC 5 MHz Ch20528 RB1 Offset24 SCC 10 MHz Ch20600 RB1 Offset0(2)

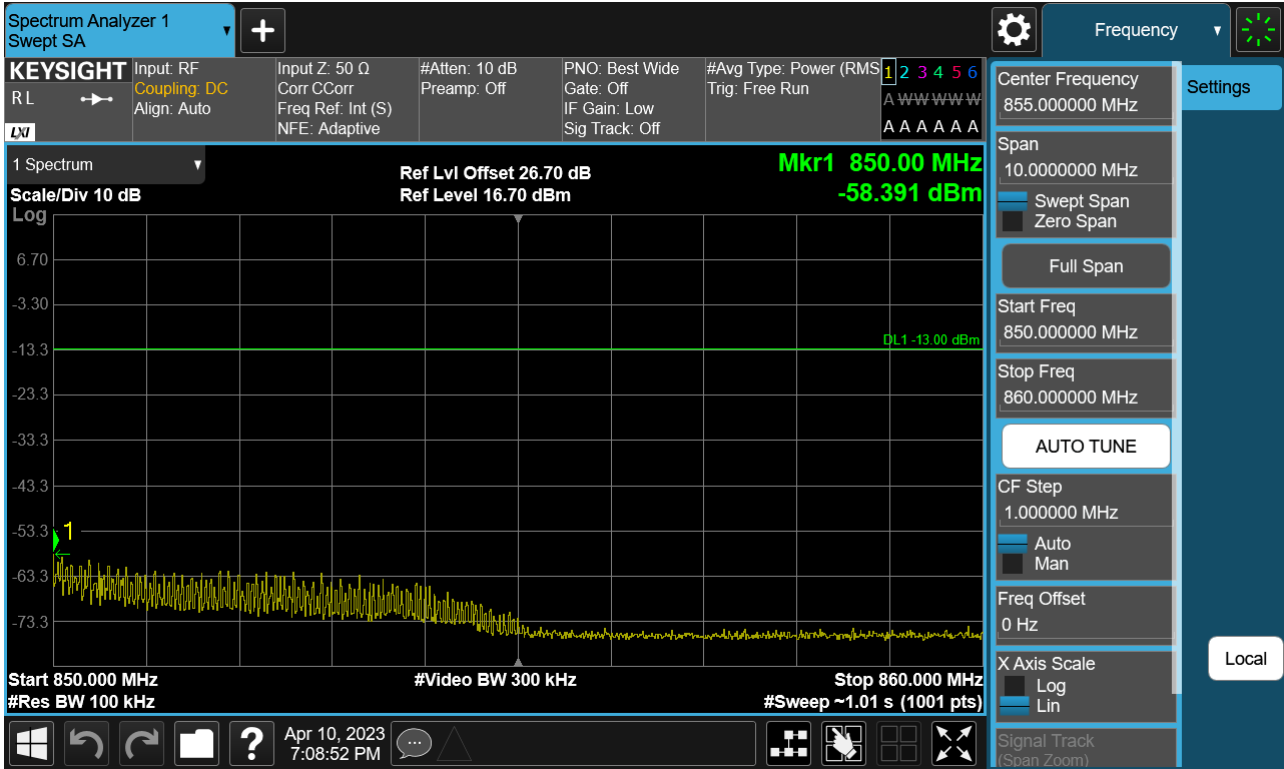


Highest Channel\_PCC 5 MHz Ch20595 RB25 Offset0 SCC 3 MHz Ch20634 RB15 Offset0(1)

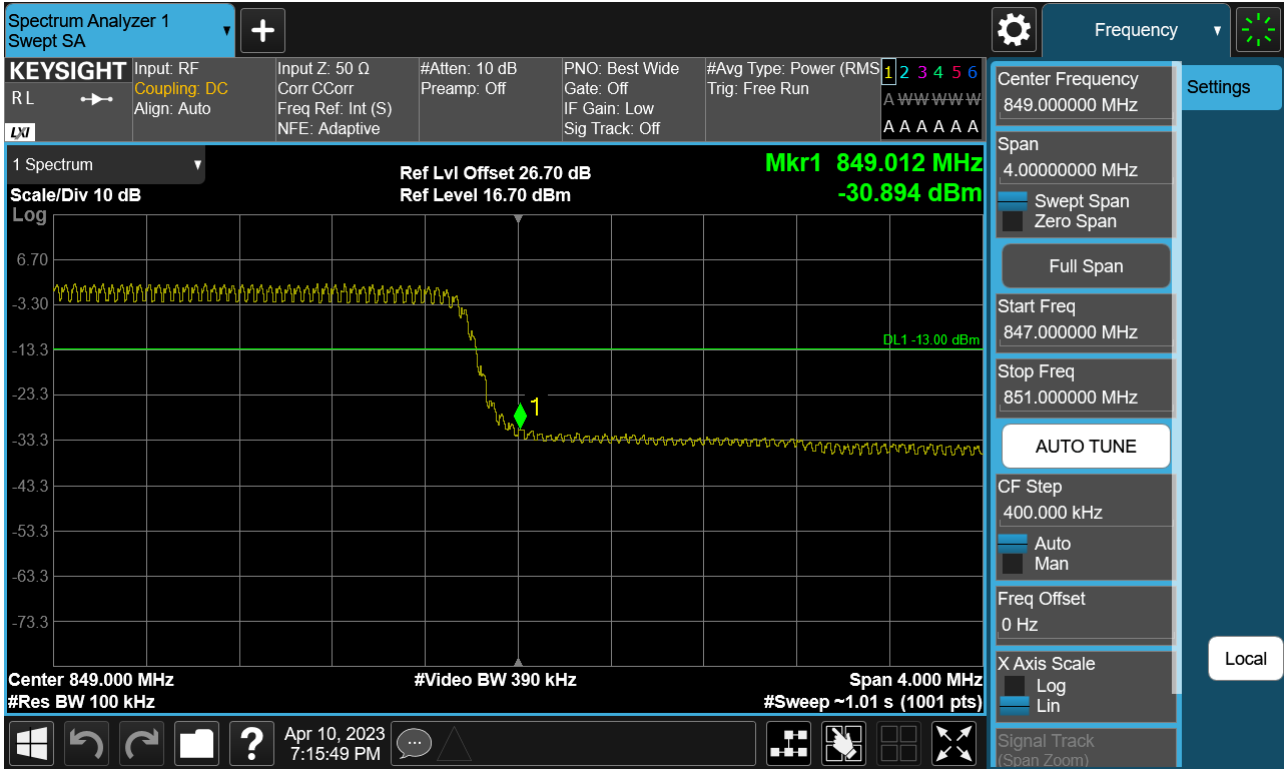


Highest Channel\_PCC 5 MHz Ch20595 RB25 Offset0 SCC 3 MHz Ch20634 RB15 Offset0(2)

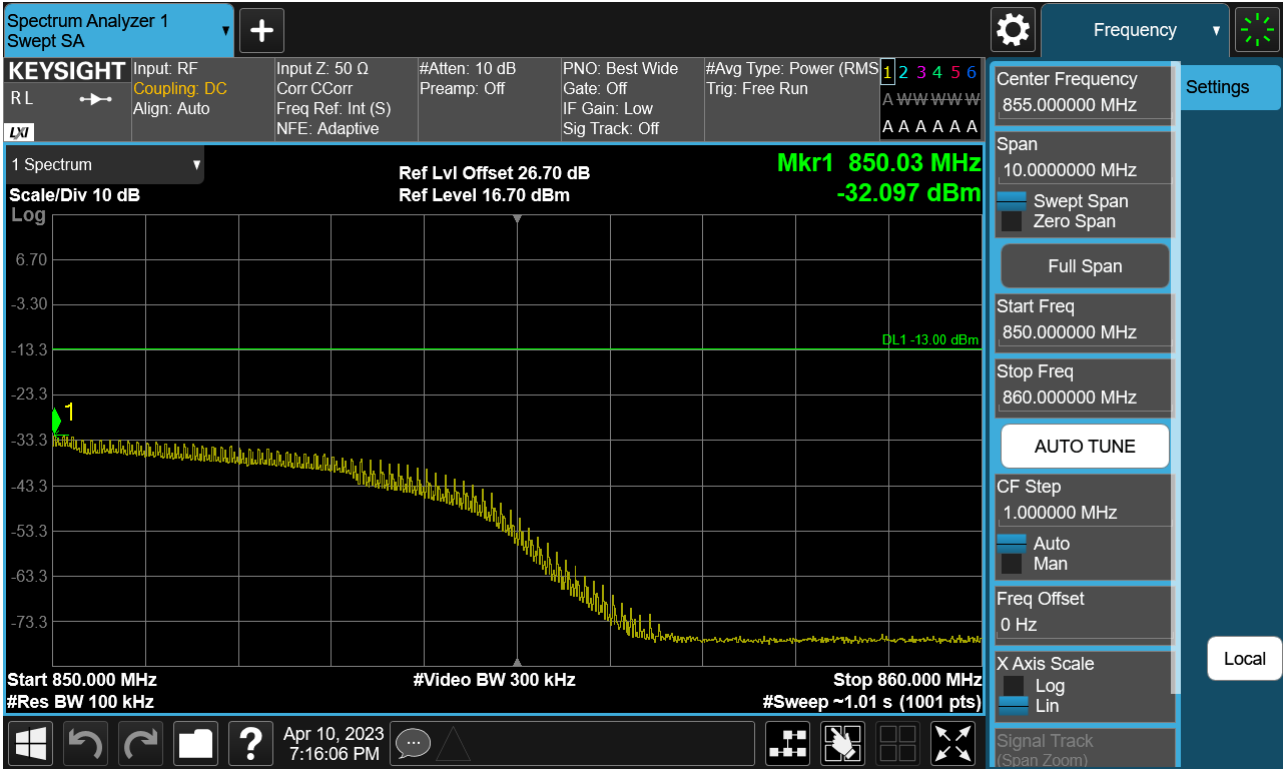

Highest Channel\_PCC 10 MHz Ch20501 RB50 Offset0 SCC 10 MHz Ch20600 RB50 Offset0(1)

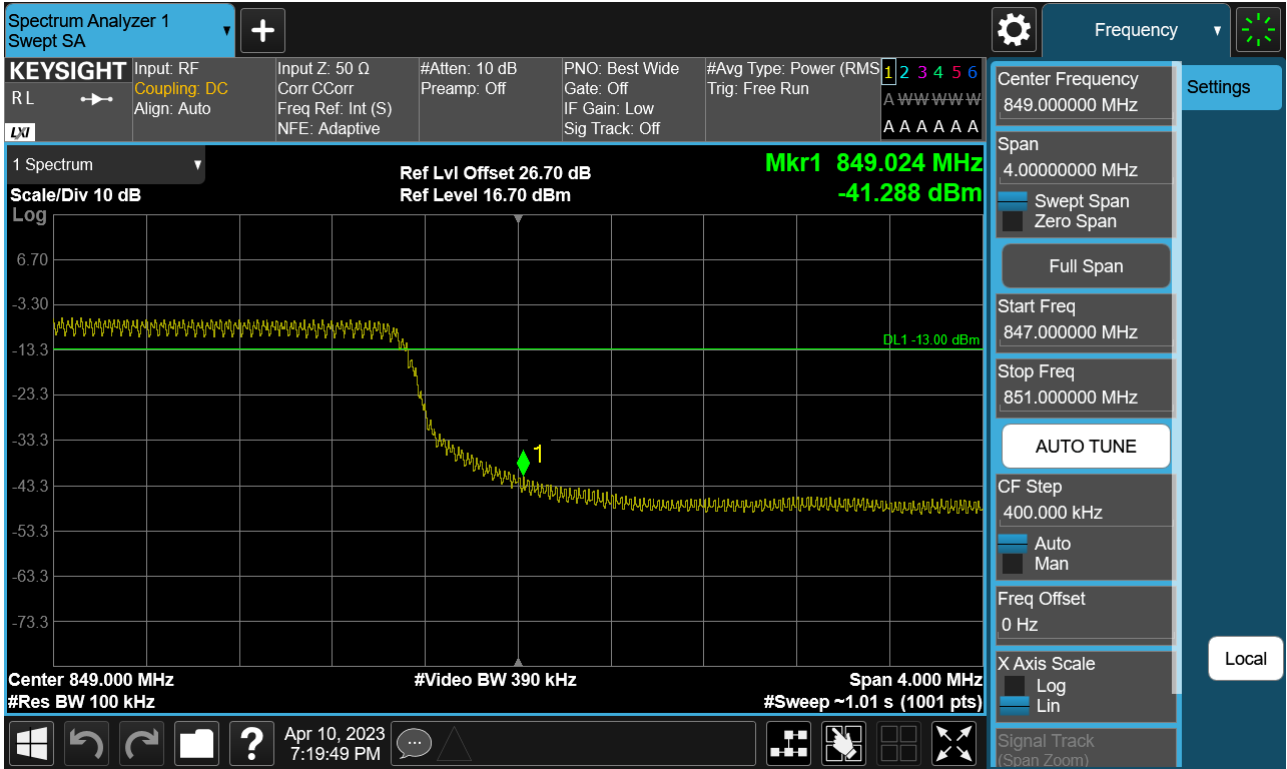


Highest Channel\_PCC 10 MHz Ch20501 RB50 Offset0 SCC 10 MHz Ch20600 RB50 Offset0(2)

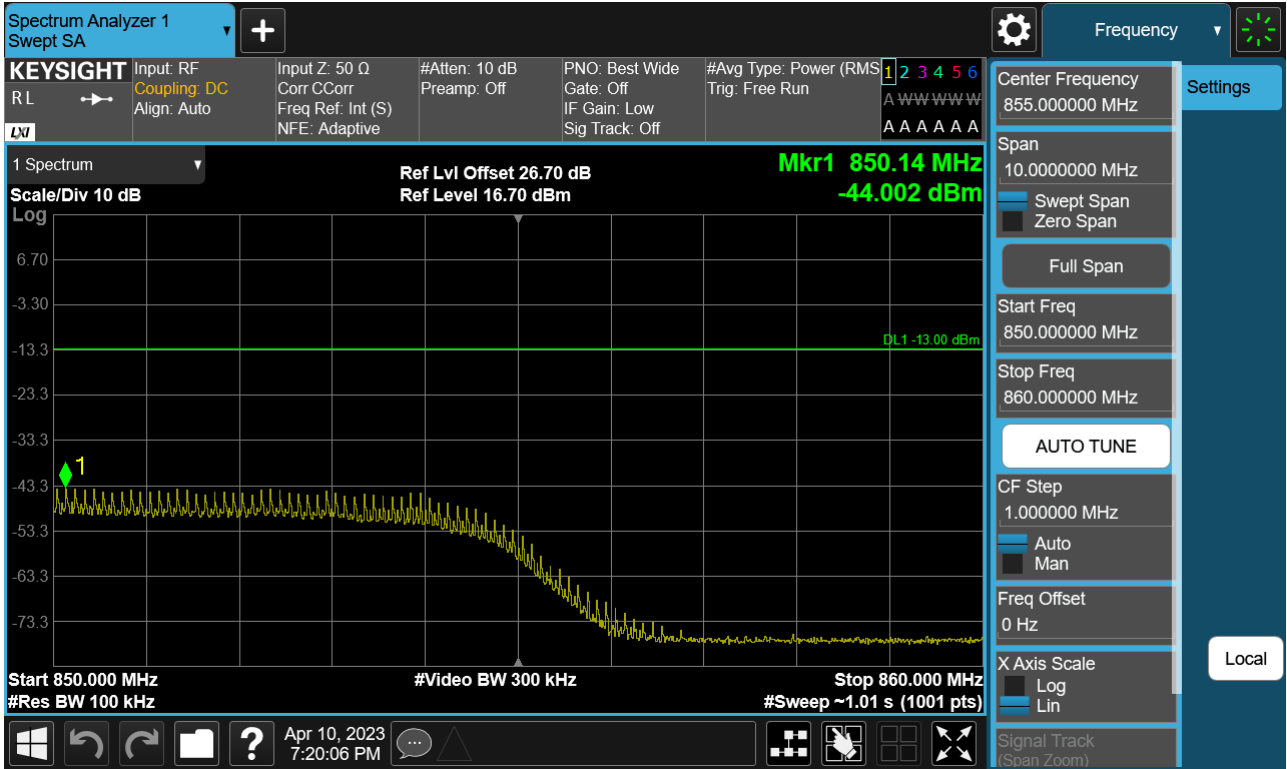




Lowest Channel\_PCC 5 MHz Ch20425 RB25 Offset0 SCC 3 MHz Ch20464 RB15 Offset0(1)

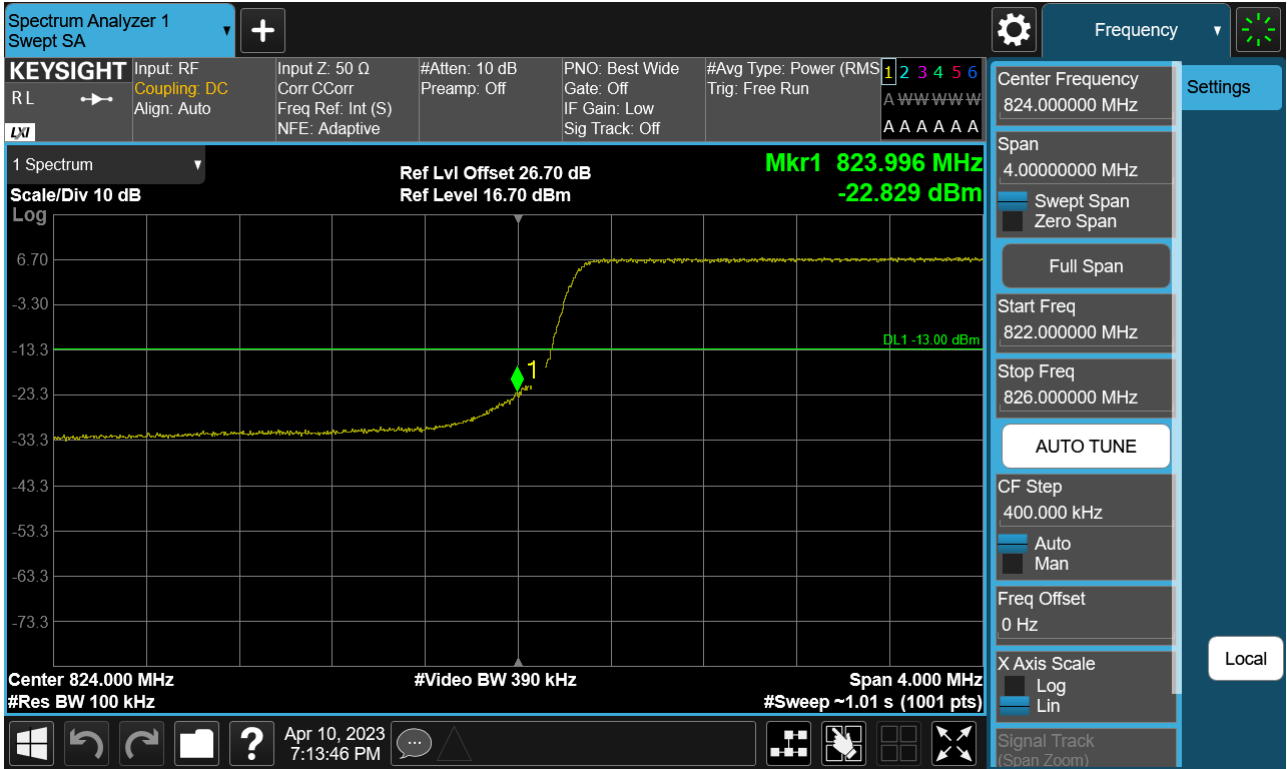


Lowest Channel\_PCC 5 MHz Ch20425 RB25 Offset0 SCC 3 MHz Ch20464 RB15 Offset0(2)




Lowest Channel\_PCC 5 MHz Ch20428 RB1 Offset0 SCC 10 MHz Ch20500 RB1 Offset49(1)

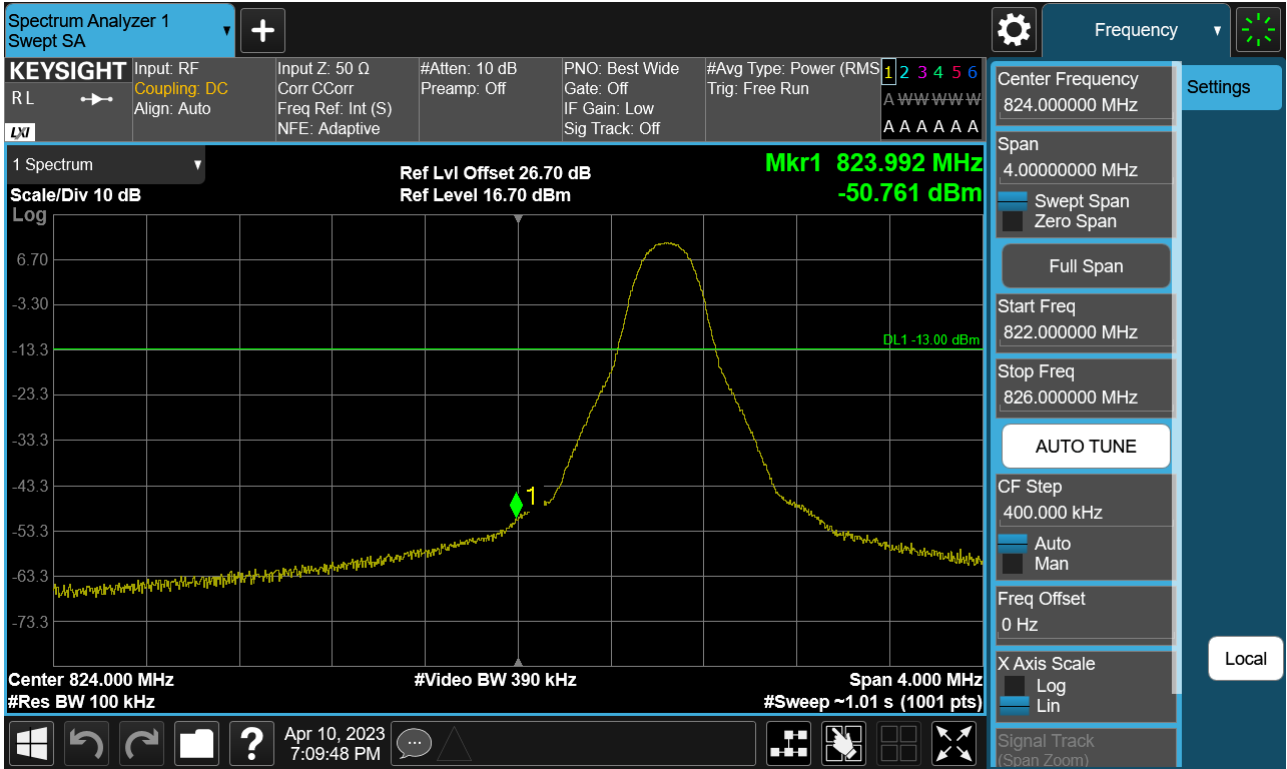


Lowest Channel\_PCC 5 MHz Ch20428 RB1 Offset0 SCC 10 MHz Ch20500 RB1 Offset49(2)

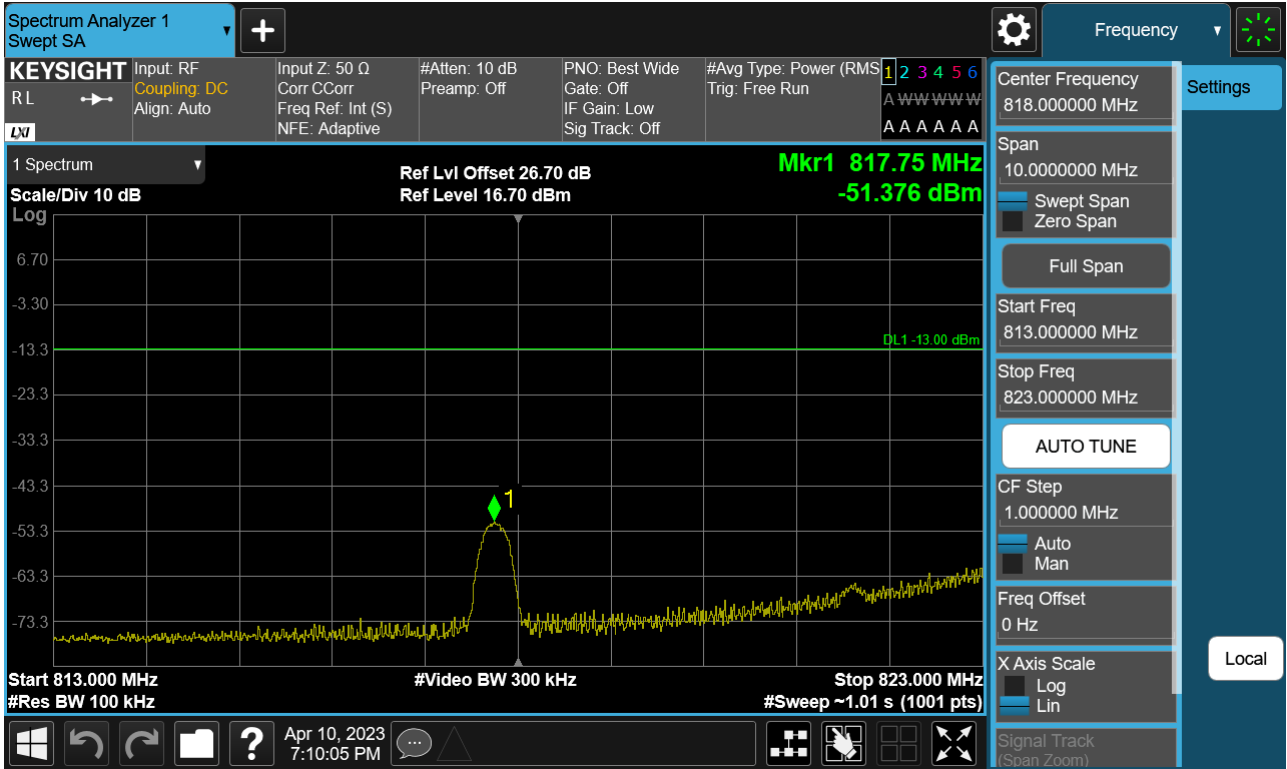


Lowest Channel\_PCC 5 MHz Ch20428 RB1 Offset24 SCC 10 MHz Ch20500 RB1 Offset0(1)

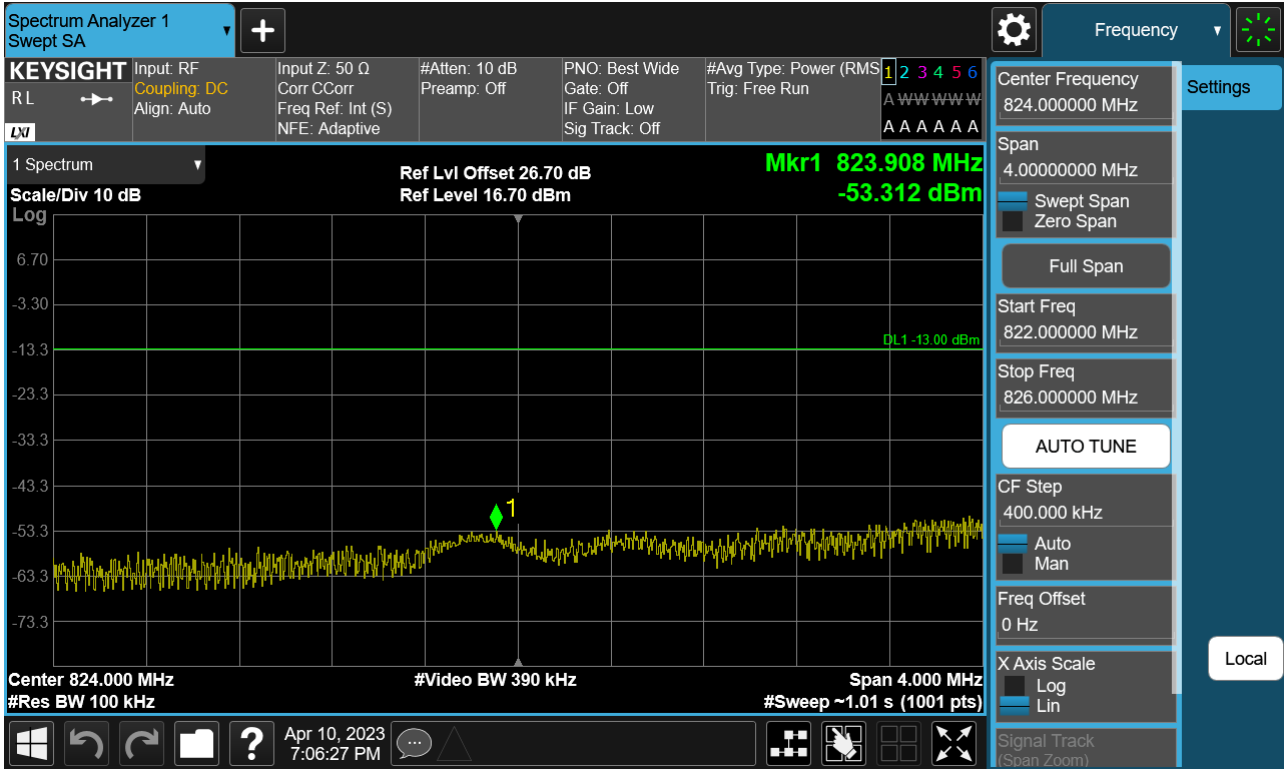


Lowest Channel\_PCC 5 MHz Ch20428 RB1 Offset24 SCC 10 MHz Ch20500 RB1 Offset0(2)

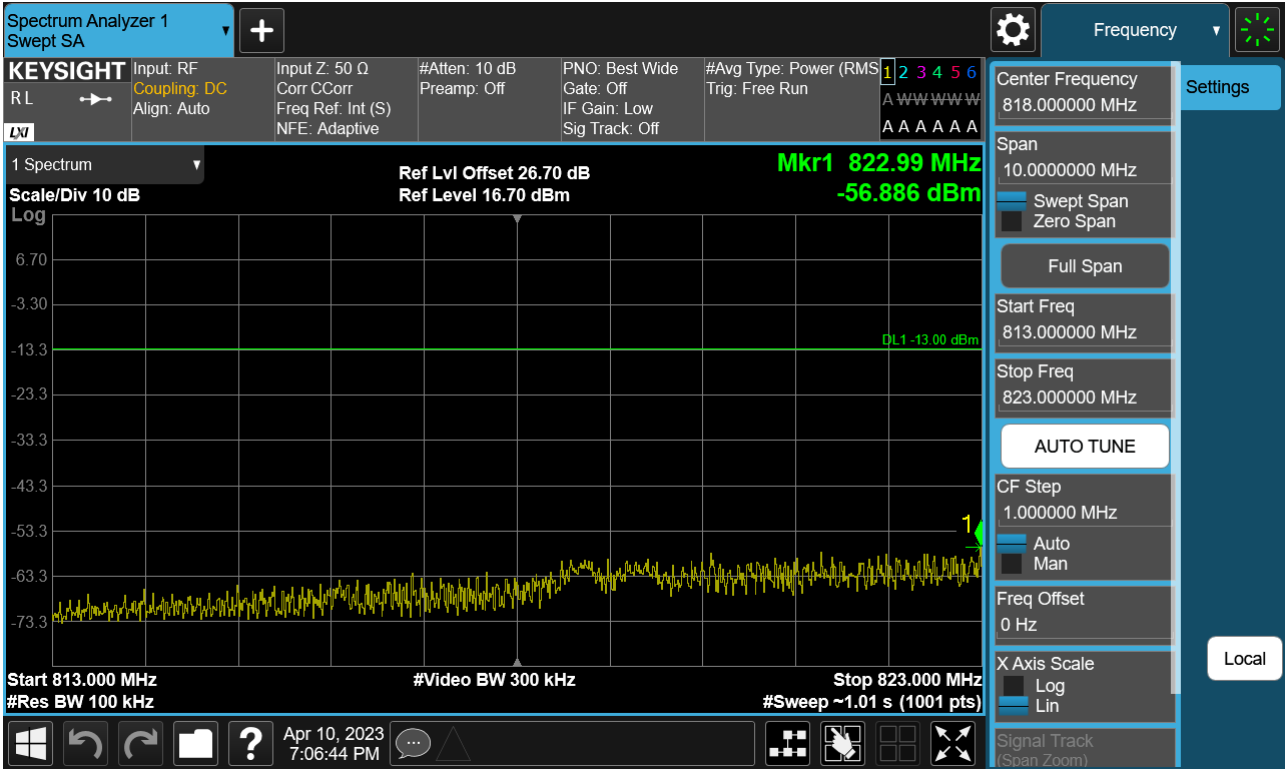

Lowest Channel\_PCC 10 MHz Ch20450 RB50 Offset0 SCC 10 MHz Ch20549 RB50 Offset0(1)

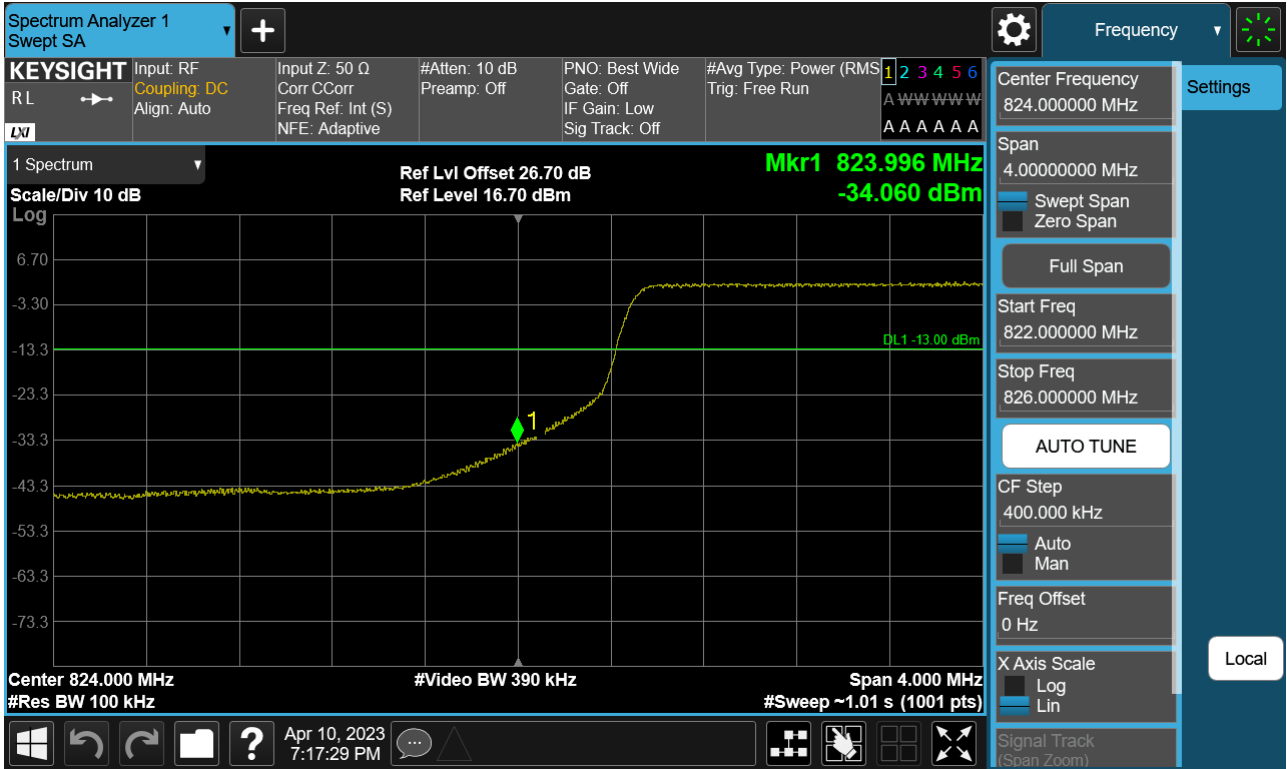

Lowest Channel\_PCC 10 MHz Ch20450 RB50 Offset0 SCC 10 MHz Ch20549 RB50 Offset0(2)

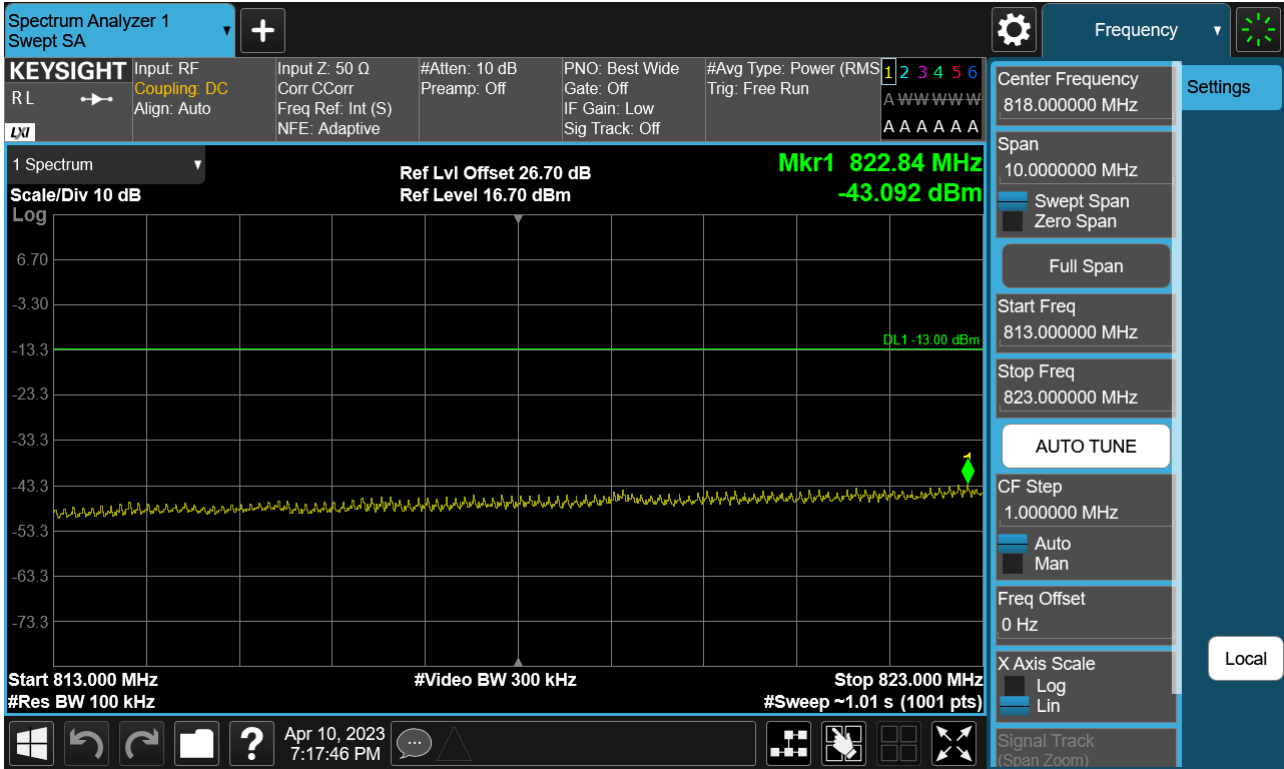



**8.5 Frequency Stability / Variation Of Ambient Temperature**

- PCC Channel: 20501
- PCC Frequency: 834.1 MHz
- PCC BandWidth: 3 MHz
- SCC Channel: 20540
- SCC Frequency: 838.0 MHz
- SCC BandWidth: 5 MHz
- Voltage : 3.880 VDC
- LIMIT: ± 0.000 25 % or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (°C)	PPM		Frequency Error (MHz)	
			PCC	SCC	PCC	SCC
100 %	3.880	+20(Ref)	0.042	0.046	834.09996	837.99999
100 %		-30	-0.060	0.041	834.09991	838.00001
100 %		-20	0.043	0.041	834.09995	837.99997
100 %		-10	0.039	0.040	834.09998	838.00004
100 %		0	-0.041	-0.058	834.09987	837.99995
100 %		10	0.040	0.051	834.09997	837.99995
100 %		30	0.053	0.050	834.09997	838.00004
100 %		40	-0.053	-0.058	834.09991	837.99991
100 %		50	-0.063	-0.050	834.09993	837.99986
Batt. Endpoint		3.400	20	0.049	-0.048	834.10002

- ▣ PCC Channel: 20510
- ▣ PCC Frequency: 835.0 MHz
- ▣ PCC BandWidth: 5 MHz
- ▣ SCC Channel: 20549
- ▣ SCC Frequency: 838.9 MHz
- ▣ SCC BandWidth: 3 MHz
- ▣ Voltage : 3.880 VDC
- ▣ LIMIT: ± 0.000 25 % or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (°C)	PPM		Frequency Error (MHz)	
			PCC	SCC	PCC	SCC
100 %	3.880	+20(Ref)	0.032	0.040	835.09991	838.99994
100 %		-30	-0.065	0.031	835.09982	838.99993
100 %		-20	0.041	0.035	835.09988	838.99991
100 %		-10	0.031	0.032	835.09990	838.99996
100 %		0	-0.049	-0.060	835.09979	838.99990
100 %		10	0.035	0.046	835.09993	838.99990
100 %		30	0.051	0.045	835.09992	838.99995
100 %		40	-0.055	-0.067	835.09982	838.99987
100 %		50	-0.067	-0.055	835.09993	838.99981
Batt. Endpoint	3.400	20	0.040	-0.053	835.10001	838.99991

- PCC Channel: 20478
- PCC Frequency: 831.8 MHz
- PCC BandWidth: 5 MHz
- SCC Channel: 20550
- SCC Frequency: 839.0 MHz
- SCC BandWidth: 10 MHz
- Voltage : 3.880 VDC
- LIMIT: ± 0.000 25 % or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (°C)	PPM		Frequency Error (MHz)	
			PCC	SCC	PCC	SCC
100 %	3.880	+20(Ref)	0.041	0.037	831.79987	838.99996
100 %		-30	-0.062	0.031	831.79990	838.99999
100 %		-20	0.040	0.034	831.79994	838.99991
100 %		-10	0.034	0.031	831.79994	838.99994
100 %		0	-0.047	-0.067	831.79986	838.99988
100 %		10	0.030	0.041	831.79994	838.99992
100 %		30	0.051	0.050	831.79995	838.99998
100 %		40	-0.058	-0.066	831.79985	838.99986
100 %		50	-0.066	-0.056	831.79984	838.99980
Batt. Endpoint	3.400	20	0.044	-0.055	831.80001	838.99986

- PCC Channel: 20500
- PCC Frequency: 834.0 MHz
- PCC BandWidth: 10 MHz
- SCC Channel: 20572
- SCC Frequency: 841.2 MHz
- SCC BandWidth: 5 MHz
- Voltage : 3.880 VDC
- LIMIT: ± 0.000 25 % or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (°C)	PPM		Frequency Error (MHz)	
			PCC	SCC	PCC	SCC
100 %	3.880	+20(Ref)	0.035	0.039	834.09995	841.19997
100 %		-30	-0.065	0.035	834.09983	841.19992
100 %		-20	0.041	0.032	834.09986	841.19993
100 %		-10	0.034	0.039	834.09996	841.19994
100 %		0	-0.051	-0.062	834.09985	841.19989
100 %		10	0.032	0.046	834.09994	841.19993
100 %		30	0.044	0.047	834.09991	841.20001
100 %		40	-0.061	-0.062	834.09984	841.19983
100 %		50	-0.070	-0.056	834.09987	841.19982
Batt. Endpoint		3.400	20	0.044	-0.057	834.09994

- PCC Channel: 20476
- PCC Frequency: 831.6 MHz
- PCC BandWidth: 10 MHz
- SCC Channel: 20575
- SCC Frequency: 841.5 MHz
- SCC BandWidth: 10 MHz
- Voltage : 3.880 VDC
- LIMIT: ± 0.000 25 % or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (°C)	PPM		Frequency Error (MHz)	
			PCC	SCC	PCC	SCC
100 %	3.880	+20(Ref)	0.040	0.040	831.59996	841.49993
100 %		-30	-0.068	0.036	831.59989	841.50001
100 %		-20	0.040	0.040	831.59986	841.49994
100 %		-10	0.031	0.036	831.59997	841.49994
100 %		0	-0.045	-0.064	831.59982	841.49987
100 %		10	0.037	0.049	831.59991	841.49991
100 %		30	0.050	0.045	831.59989	841.49997
100 %		40	-0.055	-0.064	831.59990	841.49987
100 %		50	-0.068	-0.051	831.59991	841.49980
Batt. Endpoint		3.400	20	0.044	-0.051	831.59998

**8.6 Radiated Spurious Emissions**

- ▣ PCC Channel : 20450 (829.0 MHz)
- ▣ PCC BW(MHz) : 10
- ▣ PCC RB/ RB Offset : 1/ 49
- ▣ SCC Channel : 20522 (836.2 MHz)
- ▣ SCC BW(MHz) : 5
- ▣ SCC RB/ RB Offset : 1/ 0
- ▣ DISTANCE: 3 meters
- ▣ LIMIT: -13.0 dBm

Freq.(MHz)	Measured Level [dBm]	Ant. Gain (dBi)	Substitute Level [dBm]	C.L	Pol.	Result (dBm)
1 665.20	-52.73	9.79	-63.51	2.06	H	-55.78
2 497.80	-56.24	10.70	-60.56	2.47	H	-52.33
3 330.40	-57.50	12.28	-58.68	3.03	V	-49.43
4 163.00	-58.68	12.54	-57.08	3.29	H	-47.83
4 995.60	-58.83	12.61	-52.55	3.79	V	-43.73

- ▣ PCC Channel : 20510 (835.0 MHz)
- ▣ PCC BW(MHz) : 5
- ▣ PCC RB/ RB Offset : 1/ 24
- ▣ SCC Channel : 20549 (838.9 MHz)
- ▣ SCC BW(MHz) : 3
- ▣ SCC RB/ RB Offset : 1/ 0
- ▣ DISTANCE: 3 meters
- ▣ LIMIT: -13.0 dBm

Freq.(MHz)	Measured Level [dBm]	Ant. Gain (dBi)	Substitute Level [dBm]	C.L	Pol.	Result (dBm)
1 673.90	-52.15	9.85	-62.87	2.06	H	-55.08
2 510.85	-55.28	10.70	-58.91	2.49	H	-50.70
3 347.80	-58.22	12.34	-59.57	3.02	H	-50.25
4 184.75	-57.88	12.64	-55.23	3.32	V	-45.91
5 021.70	-59.13	12.56	-53.12	3.72	H	-44.28

- ▣ PCC Channel : 20586 (842.6 MHz)
- ▣ PCC BW(MHz) : 3
- ▣ PCC RB/ RB Offset : 1/ 14
- ▣ SCC Channel : 20625 (846.5 MHz)
- ▣ SCC BW(MHz) : 5
- ▣ SCC RB/ RB Offset : 1/ 0
- ▣ DISTANCE: 3 meters
- ▣ LIMIT: -13.0 dBm

Freq.(MHz)	Measured Level [dBm]	Ant. Gain (dBi)	Substitute Level [dBm]	C.L	Pol.	Result (dBm)
1 689.10	-52.80	9.94	-63.15	2.05	V	-55.26
2 533.65	-55.59	10.70	-59.65	2.53	V	-51.48
3 378.20	-57.97	12.52	-59.40	2.98	V	-49.86
4 222.75	-58.61	12.74	-56.13	3.37	H	-46.76
5 067.30	-59.32	12.41	-52.38	3.64	H	-43.61



**8.7 Occupied Bandwidth**

PCC					SCC					Data (MHz)
BW [MHz]	Ch	Freq [MHz]	Mod	RB/Offset	BW [MHz]	Ch	Freq [MHz]	Mod	RB/Offset	
3	20501	834.1	QPSK	15/ 0	5	20540	838.0	QPSK	25/ 0	7.4938
5	20510	835.0	QPSK	25/ 0	3	20549	838.9	QPSK	15/ 0	7.4760
5	20478	831.8	QPSK	25/ 0	10	20550	839.0	QPSK	50/ 0	13.816
10	20500	834.0	QPSK	50/ 0	5	20572	841.2	QPSK	25/ 0	13.931
10	20476	831.6	QPSK	50/ 0	10	20575	841.5	QPSK	50/ 0	18.710

PCC					SCC					Data (MHz)
BW [MHz]	Ch	Freq [MHz]	Mod	RB/Offset	BW [MHz]	Ch	Freq [MHz]	Mod	RB/Offset	
3	20501	834.1	16QAM	15/ 0	5	20540	838.0	16QAM	25/ 0	7.4387
5	20510	835.0	16QAM	25/ 0	3	20549	838.9	16QAM	15/ 0	7.4703
5	20478	831.8	16QAM	25/ 0	10	20550	839.0	16QAM	50/ 0	13.890
10	20500	834.0	16QAM	50/ 0	5	20572	841.2	16QAM	25/ 0	13.926
10	20476	831.6	16QAM	50/ 0	10	20575	841.5	16QAM	50/ 0	18.741


PCC					SCC					Data (MHz)
BW [MHz]	Ch	Freq [MHz]	Mod	RB/Offset	BW [MHz]	Ch	Freq [MHz]	Mod	RB/Offset	
3	20501	834.1	64QAM	15/ 0	5	20540	838.0	64QAM	25/ 0	7.4383
5	20510	835.0	64QAM	25/ 0	3	20549	838.9	64QAM	15/ 0	7.4965
5	20478	831.8	64QAM	25/ 0	10	20550	839.0	64QAM	50/ 0	13.884
10	20500	834.0	64QAM	50/ 0	5	20572	841.2	64QAM	25/ 0	13.878
10	20476	831.6	64QAM	50/ 0	10	20575	841.5	64QAM	50/ 0	18.720

PCC					SCC					Data (MHz)
BW [MHz]	Ch	Freq [MHz]	Mod	RB/Offset	BW [MHz]	Ch	Freq [MHz]	Mod	RB/Offset	
3	20501	834.1	256QAM	15/ 0	5	20540	838.0	256QAM	25/ 0	7.4715
5	20510	835.0	256QAM	25/ 0	3	20549	838.9	256QAM	15/ 0	7.4965
5	20478	831.8	256QAM	25/ 0	10	20550	839.0	256QAM	50/ 0	13.826
10	20500	834.0	256QAM	50/ 0	5	20572	841.2	256QAM	25/ 0	13.919
10	20476	831.6	256QAM	50/ 0	10	20575	841.5	256QAM	50/ 0	18.748


Note:

In order to simplify the report, attached plots were only Max.Bandwidth(10+10)


PCC 10 MHz Ch20476 RB50 Offset0, SCC 10 MHz Ch20575 RB50 Offset0\_(QPSK)

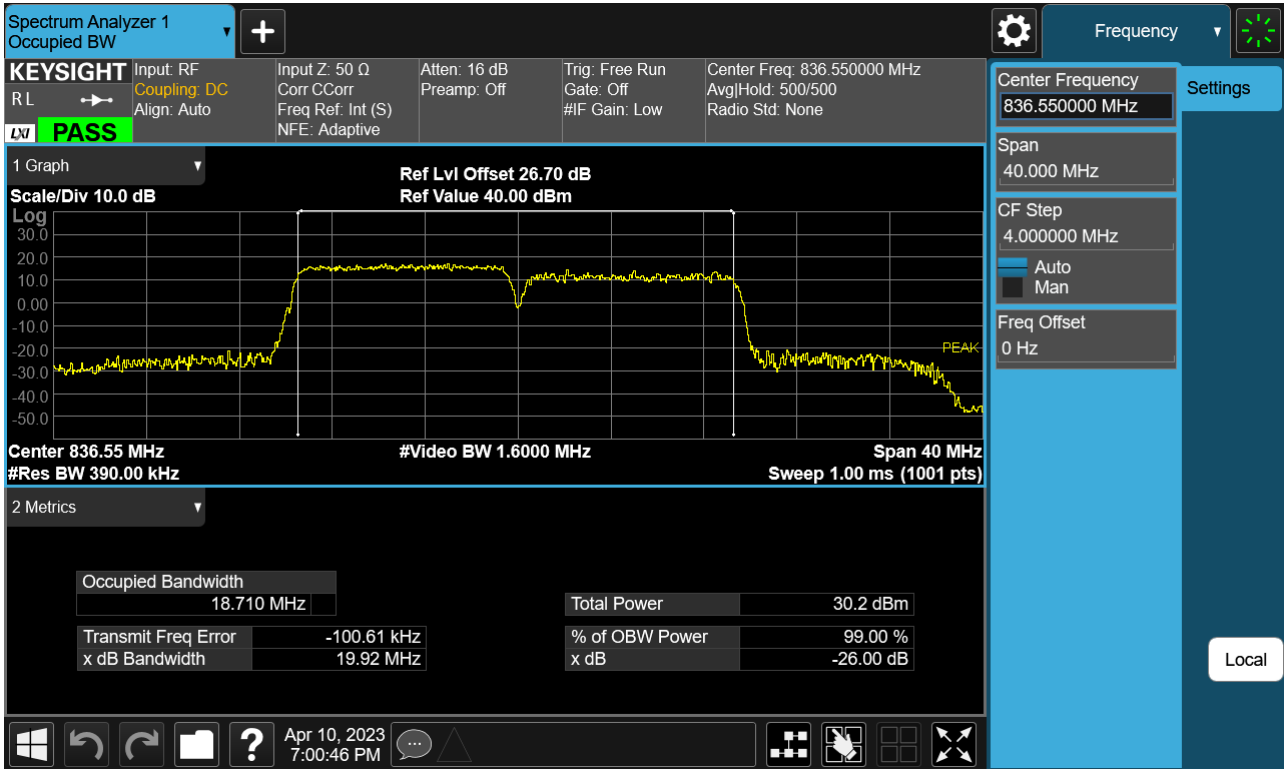


PCC 10 MHz Ch20476 RB50 Offset0, SCC 10 MHz Ch20575 RB50 Offset0\_(16QAM)

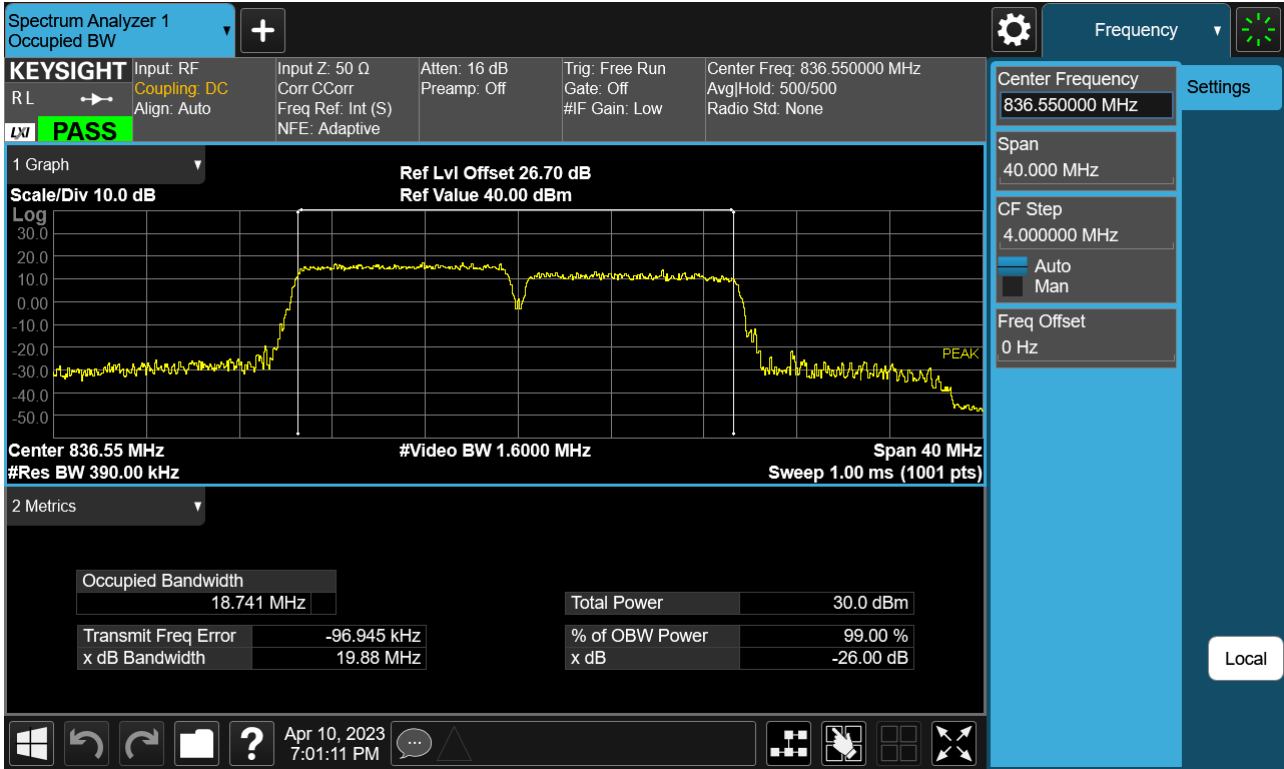

PCC 10 MHz Ch20476 RB50 Offset0, SCC 10 MHz Ch20575 RB50 Offset0\_(64QAM)

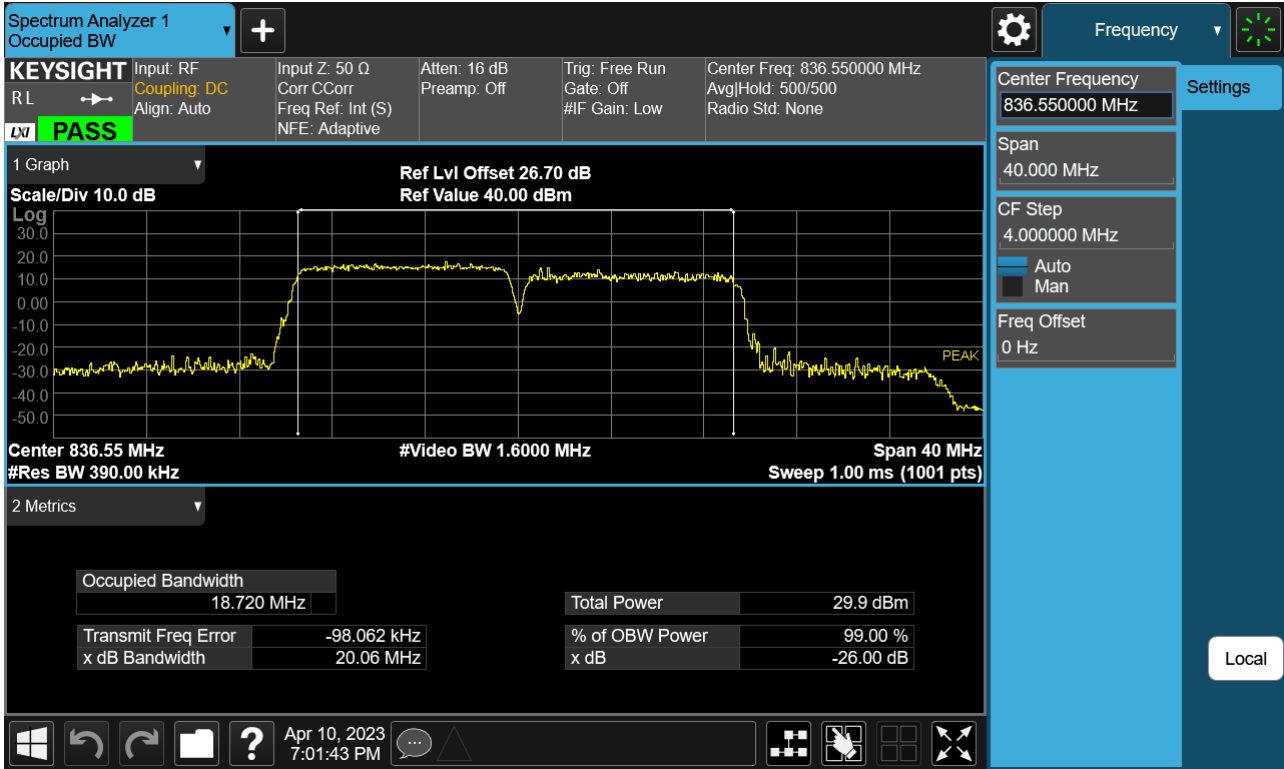

PCC 10 MHz Ch20476 RB50 Offset0, SCC 10 MHz Ch20575 RB50 Offset0\_(256QAM)

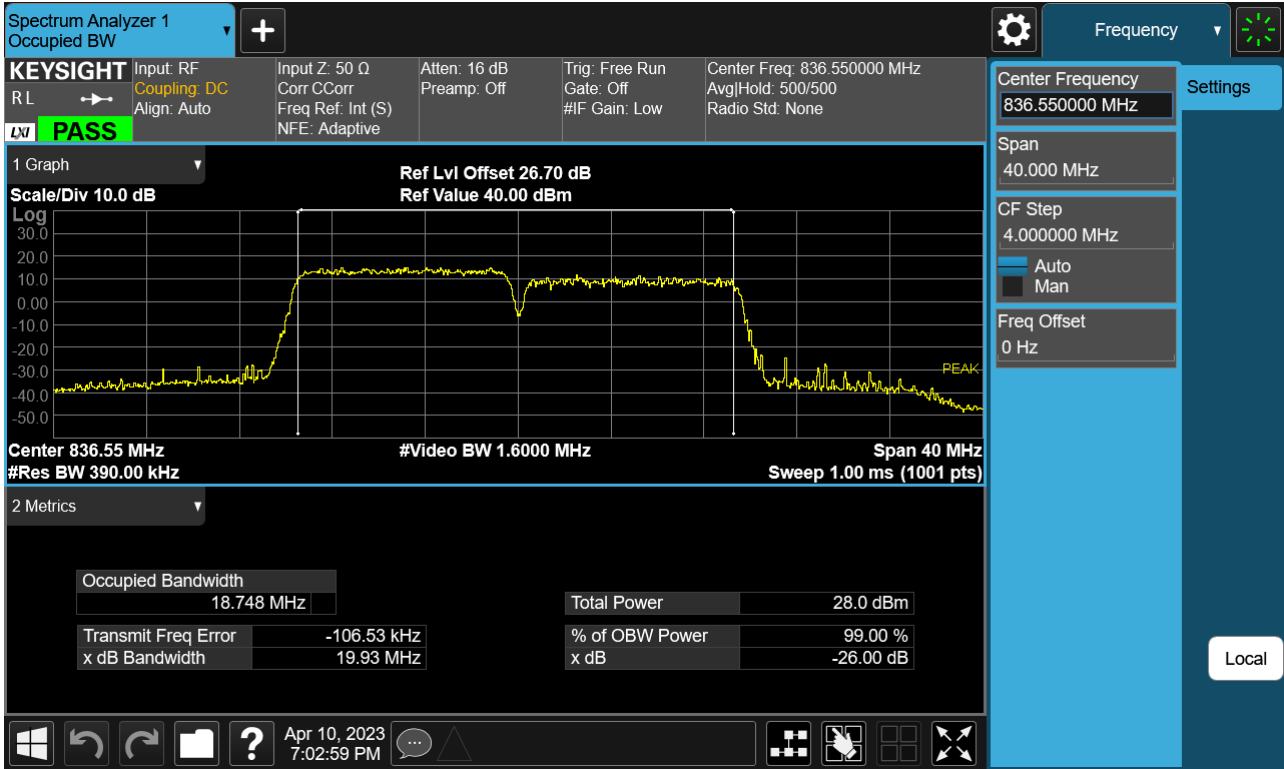

**8.8 Peak- to- Average Ratio**

PCC					SCC					Data (dBm)
BW [MHz]	Ch	Freq [MHz]	Mod	RB/Offset	BW [MHz]	Ch	Freq [MHz]	Mod	RB/Offset	
3	20501	834.1	QPSK	15/ 0	5	20540	838.0	QPSK	25/ 0	5.42
5	20510	835.0	QPSK	25/ 0	3	20549	838.9	QPSK	15/ 0	5.53
5	20478	831.8	QPSK	25/ 0	10	20550	839.0	QPSK	50/ 0	5.97
10	20500	834.0	QPSK	50/ 0	5	20572	841.2	QPSK	25/ 0	6.15
10	20476	831.6	QPSK	50/ 0	10	20575	841.5	QPSK	50/ 0	6.23

PCC					SCC					Data (dBm)
BW [MHz]	Ch	Freq [MHz]	Mod	RB/Offset	BW [MHz]	Ch	Freq [MHz]	Mod	RB/Offset	
3	20501	834.1	16QAM	15/ 0	5	20540	838.0	16QAM	25/ 0	5.63
5	20510	835.0	16QAM	25/ 0	3	20549	838.9	16QAM	15/ 0	5.77
5	20478	831.8	16QAM	25/ 0	10	20550	839.0	16QAM	50/ 0	6.66
10	20500	834.0	16QAM	50/ 0	5	20572	841.2	16QAM	25/ 0	6.72
10	20476	831.6	16QAM	50/ 0	10	20575	841.5	16QAM	50/ 0	6.82

PCC					SCC					Data (dBm)
BW [MHz]	Ch	Freq [MHz]	Mod	RB/Offset	BW [MHz]	Ch	Freq [MHz]	Mod	RB/Offset	
3	20501	834.1	64QAM	15/ 0	5	20540	838.0	64QAM	25/ 0	5.71
5	20510	835.0	64QAM	25/ 0	3	20549	838.9	64QAM	15/ 0	5.85
5	20478	831.8	64QAM	25/ 0	10	20550	839.0	64QAM	50/ 0	6.74
10	20500	834.0	64QAM	50/ 0	5	20572	841.2	64QAM	25/ 0	6.84
10	20476	831.6	64QAM	50/ 0	10	20575	841.5	64QAM	50/ 0	6.89


PCC					SCC					Data (dBm)
BW [MHz]	Ch	Freq [MHz]	Mod	RB/Offset	BW [MHz]	Ch	Freq [MHz]	Mod	RB/Offset	
3	20501	834.1	256QAM	15/ 0	5	20540	838.0	256QAM	25/ 0	6.06
5	20510	835.0	256QAM	25/ 0	3	20549	838.9	256QAM	15/ 0	6.16
5	20478	831.8	256QAM	25/ 0	10	20550	839.0	256QAM	50/ 0	7.05
10	20500	834.0	256QAM	50/ 0	5	20572	841.2	256QAM	25/ 0	7.08
10	20476	831.6	256QAM	50/ 0	10	20575	841.5	256QAM	50/ 0	7.13




Note:

- In order to simplify the report, attached plots were only Max.Bandwidth(10+10)
- Peak- to- Average Ratio is not required. These values are reported for information only.

PCC 10 MHz 20476 RB50 Offset0, SCC 10 MHz Ch20575 RB50 Offset0 (QPSK)

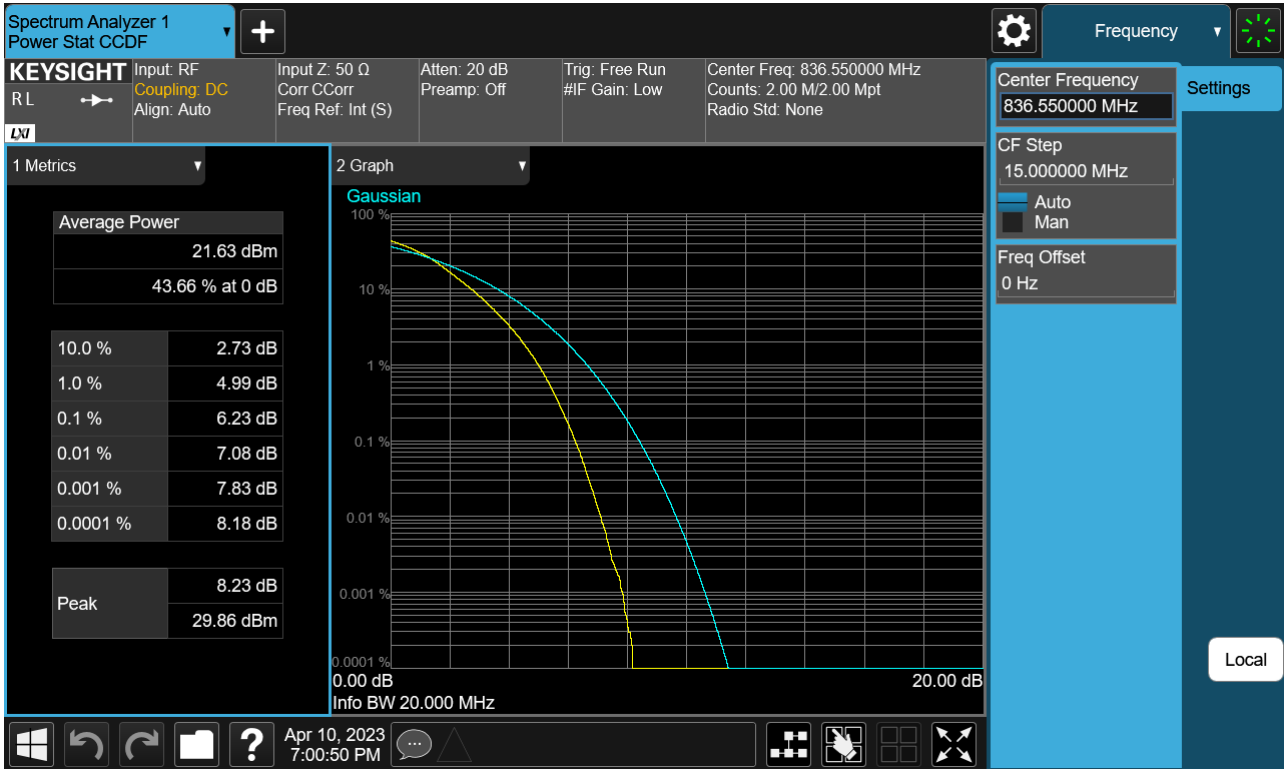

PCC 10 MHz 20476 RB50 Offset0, SCC 10 MHz Ch20575 RB50 Offset0 (16QAM)

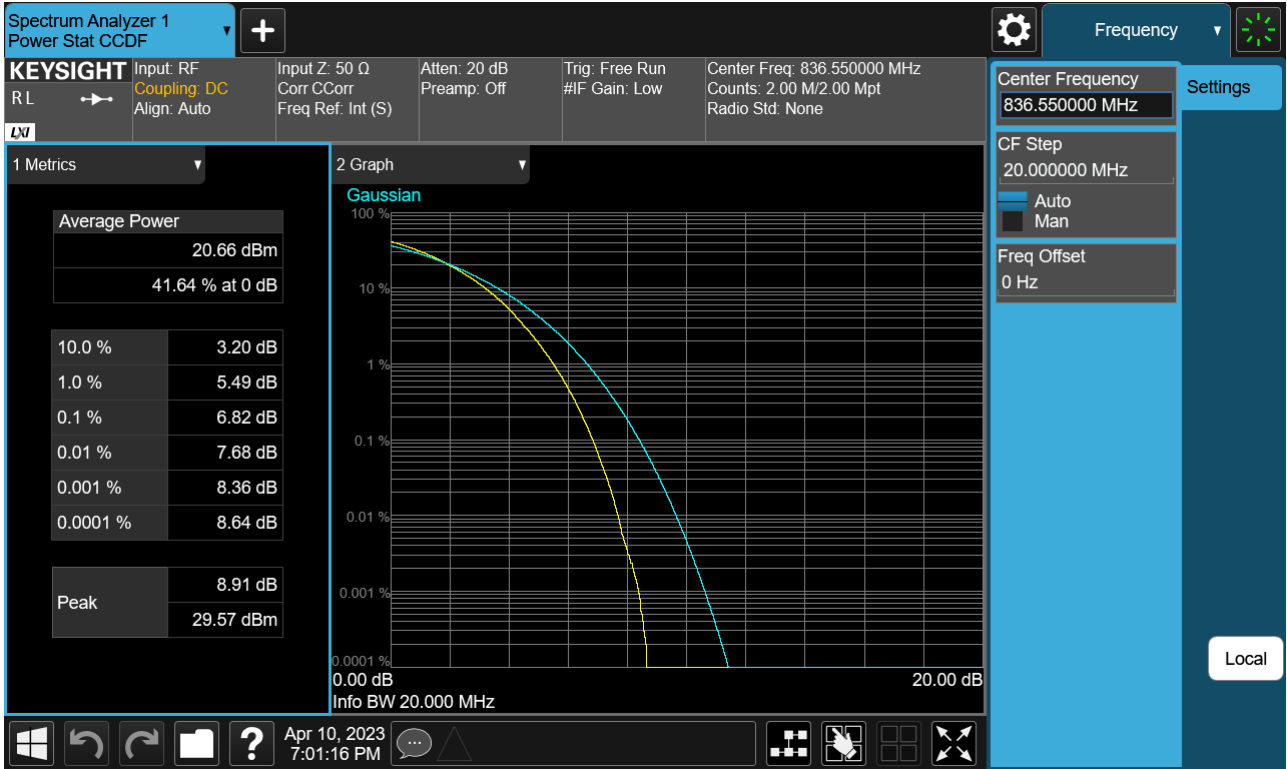

PCC 10 MHz 20476 RB50 Offset0, SCC 10 MHz Ch20575 RB50 Offset0 (64QAM)



PCC 10 MHz 20476 RB50 Offset0, SCC 10 MHz Ch20575 RB50 Offset0 (256QAM)



## 9. ANNEX A\_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-2305-FC031-P