

FCC LTE REPORT

Certification

Applicant Name:
SAMSUNG Electronics Co., Ltd.

Date of Issue:

May 09, 2023

Location:

HCT CO., LTD.,

74, Seoicheon-ro 578beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA

Report No.: HCT-RF-2305-FC015

FCC ID: A3LSMX818U

APPLICANT: SAMSUNG Electronics Co., Ltd.

Model(s):	SM-X818U
EUT Type:	Tablet
FCC Classification:	PCS Licensed Transmitter (PCB)
FCC Rule Part(s):	§27, §2

Main 1 Ant

Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	EIRP	
				Max. Power (W)	Max. Power (dBm)
LTE – Band 30 (5)	2307.5 – 2312.5	4M52G7D	QPSK	0.146	21.63
		4M53W7D	16QAM	0.123	20.90
		4M52W7D	64QAM	0.096	19.81
		4M52W7D	256QAM	0.047	16.71
LTE – Band 30 (10)	2310.0	9M01G7D	QPSK	0.142	21.51
		9M04W7D	16QAM	0.122	20.85
		9M00W7D	64QAM	0.095	19.76
		8M98W7D	256QAM	0.047	16.72

Sub 2 Ant

Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	EIRP	
				Max. Power (W)	Max. Power (dBm)
LTE – Band 30 (5)	2307.5 – 2312.5	4M51G7D	QPSK	0.146	21.63
		4M51W7D	16QAM	0.117	20.69
		4M51W7D	64QAM	0.099	19.97
		4M51W7D	256QAM	0.057	17.57
LTE – Band 30 (10)	2310.0	9M03G7D	QPSK	0.143	21.54
		8M98W7D	16QAM	0.115	20.62
		8M98W7D	64QAM	0.097	19.88
		9M00W7D	256QAM	0.058	17.60

The measurements shown in this report were made in accordance with the procedures specified in CFR47 section §2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998,21 U.S. C.853(a)

REVIEWED BY



Report prepared by : Jae Mun Do
Engineer of Telecommunication Testing Center

Report approved by : Jong Seok Lee
Manager of Telecommunication Testing Center

This test results were applied only to the test methods required by the standard.

This laboratory is not accredited for the test results marked *.
The above Test Report is the accredited test result by (KS Q) ISO/IEC 17025 and KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA. (HCT Accreditation No.: KT197)

* The report shall not be reproduced except in full(only partly) without approval of the laboratory.

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-RF-2305-FC015	May 09, 2023	- First Approval Report

The result shown in this test report refer only to the sample(s) tested unless otherwise stated.

Table of Contents

REVIEWED BY	2
1. GENERAL INFORMATION	5
2. INTRODUCTION	6
2.1. DESCRIPTION OF EUT.....	6
2.2. MEASURING INSTRUMENT CALIBRATION	6
2.3. TEST FACILITY	6
3. DESCRIPTION OF TESTS.....	7
3.1 TEST PROCEDURE	7
3.2 RADIATED POWER.....	8
3.3 RADIATED SPURIOUS EMISSIONS	9
3.4 PEAK- TO- AVERAGE RATIO.....	10
3.5 OCCUPIED BANDWIDTH.....	12
3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL	13
3.7 BAND EDGE	14
3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	16
3.9 WORST CASE(RADIATED TEST)	17
3.10 WORST CASE(CONDUCTED TEST)	18
4. LIST OF TEST EQUIPMENT	19
5. MEASUREMENT UNCERTAINTY	20
6. SUMMARY OF TEST RESULTS	21
7. SAMPLE CALCULATION	22
8. TEST DATA (Main 1 Ant).....	24
8.1 EQUIVALENT ISOTROPIC RADIATED POWER.....	24
8.2 RADIATED SPURIOUS EMISSIONS	25
8.3 PEAK-TO-AVERAGE RATIO.....	27
8.4 OCCUPIED BANDWIDTH	28
8.5 CONDUCTED SPURIOUS EMISSIONS	29
8.6 BAND EDGE	30
8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	34
9. TEST DATA (Sub 2 Ant)	38
9.1 EQUIVALENT ISOTROPIC RADIATED POWER.....	38
9.2 RADIATED SPURIOUS EMISSIONS	39
9.3 PEAK-TO-AVERAGE RATIO.....	41
9.4 OCCUPIED BANDWIDTH	42
9.5 CONDUCTED SPURIOUS EMISSIONS	43
9.6 BAND EDGE	44
9.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	48
10. TEST PLOTS (Main 1 Ant)	52
11. TEST PLOTS (Sub 2 Ant).....	189
12. ANNEX A_ TEST SETUP PHOTO.....	326

MEASUREMENT REPORT

1. GENERAL INFORMATION

Applicant Name:	SAMSUNG Electronics Co., Ltd.
Address:	129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
FCC ID:	A3LSMX818U
Application Type:	Certification
FCC Classification:	PCS Licensed Transmitter (PCB)
FCC Rule Part(s):	§27, §2
EUT Type:	Tablet
Model(s):	SM-X818U
Tx Frequency:	2307.5 MHz – 2312.5 MHz (LTE – Band30 (5 MHz)) 2310.0 MHz (LTE – Band30 (10 MHz))
Date(s) of Tests:	March 13, 2023 ~ April 27, 2023
Serial number:	Radiated: R32W2003H3M Conducted: R32W2003JJD

2. INTRODUCTION

2.1. DESCRIPTION OF EUT

The EUT was a Tablet with UMTS and LTE, Sub6.

It also supports IEEE 802.11 a/b/g/n/ac/ax (20/40/80/160 MHz), WIFI 6E AIT, Keyboard, S-pen, mmWave.

2.2. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

2.3. TEST FACILITY

The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the **74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.**

3. DESCRIPTION OF TESTS

3.1 TEST PROCEDURE

Test Description	Test Procedure Used
Occupied Bandwidth	- KDB 971168 D01 v03r01 – Section 4.3 - ANSI C63.26-2015 – Section 5.4.4
Channel Edge	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Spurious and Harmonic Emissions at Antenna Terminal	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Conducted Output Power	- N/A (See SAR Report)
Peak- to- Average Ratio	- KDB 971168 D01 v03r01 – Section 5.7 - ANSI C63.26-2015 – Section 5.2.3.4 - ANSI C63.26-2015 – Section 5.2.6(only GSM)
Frequency stability	- ANSI C63.26-2015 – Section 5.6
Effective Radiated Power/ Effective Isotropic Radiated Power	- KDB 971168 D01 v03r01 – Section 5.2 & 5.8 - ANSI/TIA-603-E-2016 – Section 2.2.17
Radiated Spurious and Harmonic Emissions	- KDB 971168 D01 v03r01 – Section 6.2 - ANSI/TIA-603-E-2016 – Section 2.2.12

3.2 RADIATED POWER

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna in accordance with ANSI/TIA-603-E-2016 Clause 2.2.17.

Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5 % of the expected OBW, not to exceed 1 MHz
3. VBW \geq 3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points > 2 x span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

Test Note

1. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission.
2. A half wave dipole is then substituted in place of the EUT. For emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_d \text{ (dBm)} = P_g \text{ (dBm)} - \text{cable loss (dB)} + \text{antenna gain (dB)}$$

Where: P_d is the dipole equivalent power and P_g is the generator output power into the substitution antenna.

3. The maximum value is calculated by adding the forward power to the calibrated source plus its appropriate gain value.
These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference

between the gain of the horn and an isotropic antenna are taken into consideration

4. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
5. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

3.3 RADIATED SPURIOUS EMISSIONS

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA-603-E-2016.

Test Settings

1. RBW = 100 kHz for emissions below 1 GHz and 1 MHz for emissions above 1 GHz
2. VBW \geq 3 x RBW
3. Span = 1.5 times the OBW
4. No. of sweep points > 2 x span / RBW
5. Detector = Peak
6. Trace mode = Max Hold
7. The trace was allowed to stabilize
8. Test channel : Low/ Middle/ High
9. Frequency range : We are performed all frequency to 10th harmonics from 9 kHz.

Test Note

1. Measurements value show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
2. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test data
3. For spurious emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The spurious emissions is calculated by the following formula;


$$\text{Result (dBm)} = \text{Pg (dBm)} - \text{cable loss (dB)} + \text{antenna gain (dBi)}$$

Where: Pg is the generator output power into the substitution antenna.

If the fundamental frequency is below 1 GHz, RF output power has been converted to EIRP.

$$\text{EIRP (dBm)} = \text{ERP (dBm)} + 2.15$$

3.4 PEAK- TO- AVERAGE RATIO

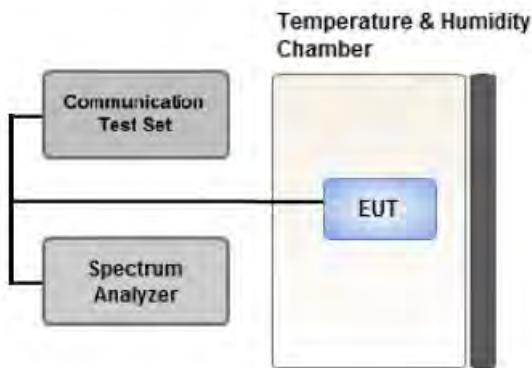

Test setup

- ① CCDF Procedure for PAPR

Test Settings

1. Set resolution/measurement bandwidth \geq signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Set the measurement interval as follows:
 - .- for continuous transmissions, set to 1 ms,
 - .- or burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
4. Record the maximum PAPR level associated with a probability of 0.1%.

② Alternate Procedure for PAPR

Use one of the procedures presented in 5.2(ANSI C63.26-2015) to measure the total peak power and record as P_{Pk} .

Use one of the applicable procedures presented 5.2(ANSI C63.26-2015) to measure the total average power and record as P_{Avg} . Determine the P.A.R. from:

$$P.A.R_{(dB)} = P_{Pk} \text{ (dBm)} - P_{Avg} \text{ (dBm)} \quad (P_{Avg} = \text{Average Power} + \text{Duty cycle Factor})$$

Test Settings(Peak Power)


The measurement instrument must have a RBW that is greater than or equal to the OBW of the signal to be measured and a VBW $\geq 3 \times$ RBW.

1. Set the RBW \geq OBW.
2. Set VBW $\geq 3 \times$ RBW.
3. Set span $\geq 2 \times$ OBW.
4. Sweep time $\geq 10 \times$ (number of points in sweep) \times (transmission symbol period).
5. Detector = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the peak amplitude level.

Test Settings(Average Power)

1. Set span to $2 \times$ to $3 \times$ the OBW.
2. Set RBW \geq OBW.
3. Set VBW $\geq 3 \times$ RBW.
4. Set number of measurement points in sweep $\geq 2 \times$ span / RBW.
5. Sweep time:
Set $\geq [10 \times (\text{number of points in sweep}) \times (\text{transmission period})]$ for single sweep
(automation-compatible) measurement. The transmission period is the (on + off) time.
6. Detector = power averaging (rms).
7. Set sweep trigger to "free run."
8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. (To accurately determine the average power over the on and off period of the transmitter, it can be necessary to increase the number of traces to be averaged above 100 or, if using a manually configured sweep time, increase the sweep time.)
9. Use the peak marker function to determine the maximum amplitude level.
10. Add $[10 \log (1/\text{duty cycle})]$ to the measured maximum power level to compute the average power during continuous transmission. For example, add $[10 \log (1/0.25)] = 6 \text{ dB}$ if the duty cycle is a constant 25%.

3.5 OCCUPIED BANDWIDTH.

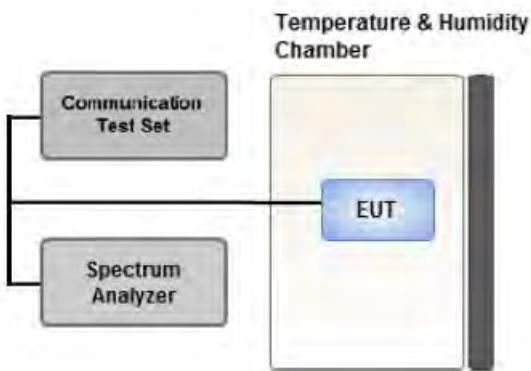

Test setup

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

The EUT makes a call to the communication simulator.


The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99 % occupied bandwidth and the 26 dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5 % of the expected OBW
3. VBW \geq 3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5 % of the 99 % occupied bandwidth observed in Step 7

3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL

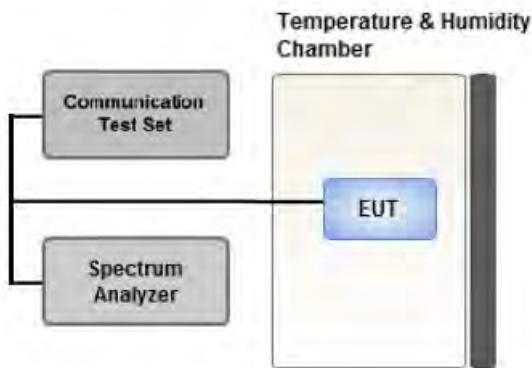

Test setup


Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. RBW = 1 MHz
2. VBW \geq 3 MHz
3. Detector = RMS
4. Trace Mode = trace average
5. Sweep time = auto
6. Number of points in sweep \geq 2 * Span / RBW

3.7 BAND EDGE

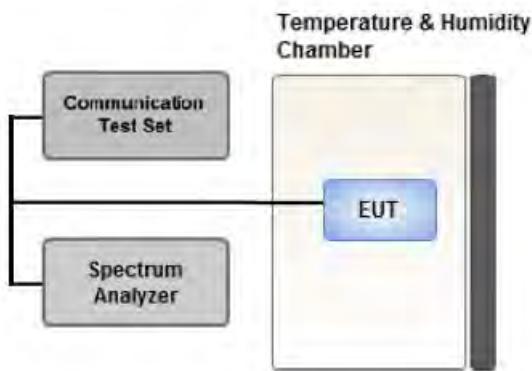

Test setup

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW > 1 % of the emission bandwidth
4. VBW > 3 x RBW
5. Detector = RMS
6. Number of sweep points $\geq 2 \times \text{Span/RBW}$
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Limit

§27.53(a)

(4) For mobile and portable stations operating in the 2305-2315 MHz and 2350-2360 MHz bands:

- (i) By a factor of not less than: $43 + 10 \log (P)$ dB on all frequencies between 2305 and 2320 MHz and on all frequencies between 2345 and 2360 MHz that are outside the licensed band(s) of operation, not less than $55 + 10 \log (P)$ dB on all frequencies between 2320 and 2324 MHz and on all frequencies between 2341 and 2345 MHz, not less than $61 + 10 \log (P)$ dB on all frequencies between 2324 and 2328 MHz and on all frequencies between 2337 and 2341 MHz, and not less than $67 + 10 \log (P)$ dB on all frequencies between 2328 and 2337 MHz;
- (ii) By a factor of not less than $43 + 10 \log (P)$ dB on all frequencies between 2300 and 2305 MHz, $55 + 10 \log (P)$ dB on all frequencies between 2296 and 2300 MHz, $61 + 10 \log (P)$ dB on all frequencies between 2292 and 2296 MHz, $67 + 10 \log (P)$ dB on all frequencies between 2288 and 2292 MHz, and $70 + 10 \log (P)$ dB below 2288 MHz;
- (iii) By a factor of not less than $43 + 10 \log (P)$ dB on all frequencies between 2360 and 2365 MHz, and not less than $70 + 10 \log (P)$ dB above 2365 MHz


Test Notes

According to FCC 22.917, 24.238, 27.53 specified that power of any emission outside of The authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

Where Margin < 1 dB the emission level is either corrected by $10 \log(1 \text{ MHz} / \text{RB})$ or the emission is integrated over a 1 MHz bandwidth to determine the final result. When using the integration method the integration window is either centered on the emission or, for emissions at the band edge, centered by an offset of 500 kHz from the block edge so that the integration window is the 1 MHz adjacent to the block edge.

3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

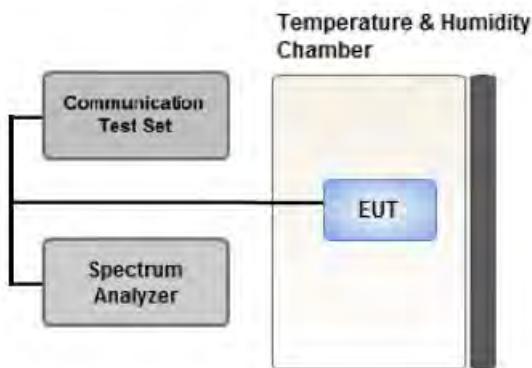

Test setup

Test Overview

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015.

The frequency stability of the transmitter is measured by:

1. Temperature:

The temperature is varied from -30 °C to +50 °C in 10 °C increments using an environmental chamber.

2. Primary Supply Voltage:

- .- Unless otherwise specified, vary primary supply voltage from 85 % to 115 % of the nominal value for other than hand carried battery equipment.
- .- For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20 °C to provide a reference).
2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10 °C intervals ranging from -30 °C to +50 °C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

3.9 WORST CASE(RADIATED TEST)

- The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.

- All modes of operation were investigated and the worst case configuration results are reported.

Mode : Stand alone, Stand alone + External accessories (Earphone, AC adapter, etc)

Worst case : Stand alone

- We were performed the RSE test in condition of co-location.

Mode : Stand alone, Simultaneous transmission scenarios

Worst case : Stand alone

- The worst case is reported with the EUT positioning, modulations, and paging service configurations shown in the test data.

- Please refer to the table below.

[Main 1 Ant Worst case]

Test Description	Modulation	RB size	RB offset	Axis
Effective Isotropic Radiated Power	QPSK, 16QAM, 64QAM, 256QAM	1	0	X
Radiated Spurious and Harmonic Emissions	QPSK	1	0	Y

[Sub 2 Ant Worst case]

Test Description	Modulation	RB size	RB offset	Axis
Effective Isotropic Radiated Power	QPSK, 16QAM, 64QAM, 256QAM	See Section 9.1		X
Radiated Spurious and Harmonic Emissions	QPSK	See Section 9.2		Z

3.10 WORST CASE(CONDUCTED TEST)

- All modes of operation were investigated and the worst case configuration results are reported.

[Worst case]

Test Description	Modulation	Bandwidth (MHz)	Frequency	RB size	RB offset
Occupied Bandwidth	QPSK, 16QAM, 64QAM, 256QAM	5, 10	Mid	Full RB	0
Peak-To-Average Radio	QPSK, 16QAM, 64QAM, 256QAM	5, 10	Mid	Full RB	0
Band Edge	QPSK	5	Low, Mid, High	1	0, 24
		10	Mid	1	0, 49
		5	Low, Mid, High	Full RB	0
		10	Mid	Full RB	0
Spurious and Harmonic Emissions at Antenna Terminal	QPSK	5	Low, Mid, High	1	0
		10	Mid	1	0

4. LIST OF TEST EQUIPMENT

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
H.P.F	FBSR-02B(WHK1.2/15 G-10EF)	T&M SYSTEM	-	01/19/2024	Annual
H.P.F	FBSR-02B(WHK3.3/18 G-10EF)	T&M SYSTEM	-	01/19/2024	Annual
Power Splitter(DC ~ 26.5 GHz)	11667B	Hewlett Packard	5001	04/19/2024	Annual
DC Power Supply	E3632A	Agilent	MY40010147	06/21/2023	Annual
Dipole Antenna	UHAP	Schwarzbeck	557	03/09/2025	Biennial
Dipole Antenna	UHAP	Schwarzbeck	558	03/09/2025	Biennial
Chamber	SU-642	ESPEC	93008124	02/22/2024	Annual
Horn Antenna(1 ~ 18 GHz)	BBHA 9120D	Schwarzbeck	147	08/30/2023	Biennial
Horn Antenna(1 ~ 18 GHz)	BBHA 9120D	Schwarzbeck	9120D-1298	09/15/2023	Biennial
Horn Antenna(15 ~ 40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170342	09/29/2024	Biennial
Horn Antenna(15 ~ 40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170124	03/28/2025	Biennial
Signal Analyzer(10 Hz ~ 26.5 GHz)	N9020A	Agilent	MY52090906	04/20/2024	Annual
ATTENUATOR(20 dB)	8493C	Hewlett Packard	17280	04/19/2024	Annual
Spectrum Analyzer(10 Hz ~ 40 GHz)	FSV40	REOHDE & SCHWARZ	100931	08/29/2023	Annual
Base Station	8960 (E5515C)	Agilent	MY48360800	08/18/2023	Annual
Loop Antenna(9 kHz ~ 30 MHz)	FMZB1513	Schwarzbeck	1513-333	03/17/2024	Biennial
Trilog Broadband Antenna	VULB9168	Schwarzbeck	895	08/16/2024	Biennial
Trilog Broadband Antenna	VULB9168	Schwarzbeck	1135	03/21/2024	Biennial
Wideband Radio Communication Tester	MT8821C	Anritsu Corp.	6262094331	12/01/2023	Annual
Wideband Radio Communication Tester	MT8820C	Anritsu Corp.	6201026545	01/05/2024	Annual
SIGNAL GENERATOR (100 kHz ~ 40 GHz)	SMB100A	REOHDE & SCHWARZ	177633	07/05/2023	Annual
Signal Analyzer(5 Hz ~ 40.0 GHz)	N9030B	KEYSIGHT	MY55480167	05/30/2023	Annual
FCC LTE Mobile Conducted RF Automation Test Software	-	HCT CO., LTD.,	-	-	-

Note:

1. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
2. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

5. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014.

All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty (\pm dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.90 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (9 kHz ~ 30 MHz)	4.14 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (30 MHz ~ 1 GHz)	5.82 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (1 GHz ~ 18 GHz)	5.74 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (18 GHz ~ 40 GHz)	5.76 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (Above 40 GHz)	5.52 (Confidence level about 95 %, $k=2$)

6. SUMMARY OF TEST RESULTS

6.1 Test Condition : Conducted Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Occupied Bandwidth	§2.1049	N/A	PASS
Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	§2.1051, §27.53(a)	Section 3.7	PASS
Conducted Output Power	§2.1046	N/A	<u>See Note1</u>
Frequency stability / variation of ambient temperature	§2.1055, §27.54	Emission must remain in band	PASS

Note:

1. See SAR Report

6.2 Test Condition : Radiated Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Equivalent Isotropic Radiated Power	§27.50(a)(3)	< 0.25 Watts max. EIRP	PASS
Radiated Spurious and Harmonic Emissions	§2.1053, §27.53(a)	< $70 + 10\log_{10} (P[\text{Watts}])$	PASS

7. SAMPLE CALCULATION

7.1 ERP Sample Calculation

Ch./ Freq.		Measured Level(dBm)	Substitute Level(dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
channel	Freq.(MHz)						W	dBm
128	824.20	-21.37	38.40	-10.61	0.95	H	0.483	26.84

ERP = Substitute LEVEL(dBm) + Ant. Gain – CL(Cable Loss)

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power.

7.2 EIRP Sample Calculation

Ch./ Freq.		Measured Level(dBm)	Substitute Level(dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
channel	Freq.(MHz)						W	dBm
27710	2310.0	-15.75	18.45	9.90	1.76	H	0.456	26.59

EIRP = Substitute LEVEL(dBm) + Ant. Gain – CL(Cable Loss)

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of equivalent isotropic radiated power.

7.3. Emission Designator

GSM Emission Designator

Emission Designator = 249KGXW

GSM BW = 249 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

EDGE Emission Designator

Emission Designator = 249KG7W

GSM BW = 249 kHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M17F9W

WCDMA BW = 4.17 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

QPSK Modulation

Emission Designator = 4M48G7D

LTE BW = 4.48 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

QAM Modulation

Emission Designator = 4M48W7D

LTE BW = 4.48 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

8. TEST DATA (Main 1 Ant)

8.1 EQUIVALENT ISOTROPIC RADIATED POWER

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP			
									W	W	dBm	
2307.5	LTE B30/ 5 MHz	QPSK	-23.46	14.40	9.54	2.32	H	< 0.25	0.145	21.62		
		16-QAM	-24.18	13.68	9.54	2.32	H		0.123	20.90		
		64-QAM	-25.28	12.58	9.54	2.32	H		0.096	19.80		
		256-QAM	-28.37	9.49	9.54	2.32	H		0.047	16.71		
2310.0		QPSK	-23.45	14.41	9.54	2.32	H	< 0.25	0.146	21.63		
		16-QAM	-24.23	13.63	9.54	2.32	H		0.122	20.85		
		64-QAM	-25.30	12.56	9.54	2.32	H		0.095	19.78		
		256-QAM	-28.43	9.43	9.54	2.32	H		0.046	16.65		
2312.5		QPSK	-23.46	14.40	9.54	2.32	H	< 0.25	0.145	21.62		
		16-QAM	-24.19	13.67	9.54	2.32	H		0.123	20.89		
		64-QAM	-25.27	12.59	9.54	2.32	H		0.096	19.81		
		256-QAM	-28.39	9.47	9.54	2.32	H		0.047	16.69		

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP		
									W	W	dBm
2310.0	LTE B30/ 10 MHz	QPSK	-23.57	14.29	9.54	2.32	H	< 0.25	0.142	21.51	
		16-QAM	-24.23	13.63	9.54	2.32	H		0.122	20.85	
		64-QAM	-25.32	12.54	9.54	2.32	H		0.095	19.76	
		256-QAM	-28.36	9.50	9.54	2.32	H		0.047	16.72	

8.2 RADIATED SPURIOUS EMISSIONS

OPERATING FREQUENCY : 2310.0 MHz
 MEASURED OUTPUT POWER: 21.63 dBm = 0.146 W
 MODE: LTE B30
 MODULATION SIGNAL: 5 MHz QPSK
 DISTANCE: 1 meters
 LIMIT: -40 dBm

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Limit (dBm)	Detector
27685 (2307.5)	4 615.00	-50.71	12.57	-61.45	3.58	H	-52.46	-40.00	Peak
	6 922.50	-55.76	11.82	-59.57	4.39	V	-52.14	-40.00	Average
	9 230.00	-57.60	10.58	-52.81	5.15	V	-47.38	-40.00	Peak
27710 (2310.0)	4 620.00	-49.75	12.56	-60.44	3.57	H	-51.45	-40.00	Peak
	6 930.00	-53.74	11.78	-57.42	4.38	V	-50.02	-40.00	Average
	9 240.00	-56.90	10.54	-51.98	5.12	V	-46.56	-40.00	Peak
27735 (2312.5)	4 625.00	-47.21	12.55	-57.96	3.58	H	-48.99	-40.00	Peak
	6 937.50	-54.09	11.74	-57.27	4.39	H	-49.92	-40.00	Average
	9 250.00	-57.21	10.50	-52.46	5.17	V	-47.13	-40.00	Peak

OPERATING FREQUENCY : 2310.00 MHz
 MEASURED OUTPUT POWER: 21.51 dBm = 0.142 W
 MODE: LTE B30
 MODULATION SIGNAL: 10 MHz QPSK
 DISTANCE: 1 meters
 LIMIT: -40 dBm

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Limit (dBm)	Detector
27710 (2310.0)	4 620.00	-49.52	12.56	-60.21	3.57	H	-51.22	-40.00	Peak
	6 930.00	-54.54	11.78	-58.22	4.38	H	-50.82	-40.00	Average
	9 240.00	-57.64	10.54	-52.72	5.12	H	-47.30	-40.00	Peak

8.3 PEAK-TO-AVERAGE RATIO

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (dB)
30	5 MHz	2310.0	QPSK	25	0	5.36
			16-QAM			6.17
			64-QAM			6.58
			256-QAM			6.84
	10 MHz		QPSK	50		5.46
			16-QAM			6.18
			64-QAM			6.57
			256-QAM			6.85

Note:

- Plots of the EUT's Peak- to- Average Ratio are shown Page 61 ~ 68.

8.4 OCCUPIED BANDWIDTH

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (MHz)
30	5 MHz	2310.0	QPSK	25	0	4.5197
			16-QAM			4.5259
			64-QAM			4.5233
			256-QAM			4.5170
	10 MHz		QPSK	50		9.0135
			16-QAM			9.0420
			64-QAM			9.0044
			256-QAM			8.9816

Note:

- Plots of the EUT's Occupied Bandwidth are shown Page 53 ~ 60.

8.5 CONDUCTED SPURIOUS EMISSIONS

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
30	5	2307.5	26.1258	30.131	-76.385	-46.254	-40.00
		2310.0	26.1245	30.131	-76.202	-46.071	
		2312.5	26.1712	30.131	-76.273	-46.142	
	10	2310.0	25.8673	30.131	-76.291	-46.160	

Note:

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 181 ~ 188.
2. Conducted Spurious Emissions was Tested QPSK Modulation, Resource Block Size 1 and Resource Block Offset 0
3. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
4. Factor(dB) = Cable Loss + Attenuator + Power Splitter

Frequency Range (GHz)	Factor [dB]
0.03 – 1	25.270
1 – 5	27.976
5 – 10	28.591
10 – 15	29.116
15 – 20	29.489
Above 20(26.5)	30.131

8.6 BAND EDGE

Band Width (MHz)	Frequency (MHz)	Modulation	RB (Size/ Offset)	Frequency Range (MHz)	Maximum Data (dBm)	Limit (dBm)
5	2307.5	QPSK	25/0	Below 2288	-53.040	-40
				2288 - 2292	-51.646	-37
				2292 - 2296	-44.724	-31
				2296 - 2300	-35.216	-25
				2300 - 2304	-23.675	-13
				2304 - 2305	-27.067	-13
				2315 - 2320	-33.997	-13
				2320 - 2324	-45.157	-25
				2324 - 2328	-50.170	-31
				2328 - 2337	-52.600	-37
				2337 - 2341	-52.817	-31
				2341 - 2345	-52.797	-25
				2345 - 2365	-52.625	-13
				Above 2365	-52.820	-40
5	2310.0	QPSK	25/0	Below 2288	-53.036	-40
				2288 - 2292	-52.362	-37
				2292 - 2296	-49.323	-31
				2296 - 2300	-38.785	-25
				2300 - 2305	-25.287	-13
				2315 - 2320	-22.676	-13
				2320 - 2324	-38.200	-25
				2324 - 2328	-48.180	-31
				2328 - 2337	-52.336	-37
				2337 - 2341	-52.788	-31
				2341 - 2345	-52.786	-25
				2345 - 2365	-52.614	-13
				Above 2365	-52.787	-40
5	2312.5	QPSK	25/0	Below 2288	-53.055	-40
				2288 - 2292	-52.821	-37
				2292 - 2296	-51.610	-31
				2296 - 2300	-46.861	-25
				2300 - 2305	-33.741	-13
				2315 - 2316	-25.353	-13

				2316 - 2320	-19.415	-13
				2320 - 2324	-33.881	-25
				2324 - 2328	-46.567	-31
				2328 - 2337	-52.100	-37
				2337 - 2341	-52.783	-31
				2341 - 2345	-52.778	-25
				2345 - 2365	-52.512	-13
				Above 2365	-52.773	-40
10	2310.0	QPSK	50/0	Below 2288	-51.675	-40
				2288 - 2292	-43.689	-37
				2292 - 2296	-37.328	-31
				2296 - 2300	-28.406	-25
				2300 - 2304	-24.244	-13
				2304 - 2305	-30.254	-13
				2315 - 2316	-28.363	-13
				2316 - 2320	-21.412	-13
				2320 - 2324	-26.137	-25
				2324 - 2328	-34.408	-31
				2328 - 2337	-43.649	-37
				2337 - 2341	-52.767	-31
				2341 - 2345	-52.760	-25
				2345 - 2365	-52.554	-13
				Above 2365	-52.753	-40

Band Width (MHz)	Frequency (MHz)	Modulation	RB (Size/ Offset)	Frequency Range (MHz)	Maximum Data (dBm)	Limit (dBm)
5	2307.5	QPSK	1/0	Below 2288	-53.044	-40
				2288 - 2292	-52.812	-37
				2292 - 2296	-50.894	-31
				2296 - 2300	-48.148	-25
				2300 - 2304	-33.568	-13
				2304 - 2305	-21.701	-13
			1/24	2315 - 2320	-48.028	-13
				2320 - 2324	-51.937	-25
				2324 - 2328	-52.395	-31
				2328 - 2337	-52.722	-37
				2337 - 2341	-52.792	-31
				2341 - 2345	-52.783	-25
				2345 - 2365	-52.555	-13
				Above 2365	-52.782	-40
			1/0	Below 2288	-53.056	-40
				2288 - 2292	-52.858	-37
				2292 - 2296	-52.365	-31
				2296 - 2300	-47.447	-25
				2300 - 2305	-41.017	-13
5	2310.0	QPSK	1/24	2315 - 2320	-39.423	-13
				2320 - 2324	-48.345	-25
				2324 - 2328	-52.211	-31
				2328 - 2337	-52.700	-37
				2337 - 2341	-52.770	-31
				2341 - 2345	-52.745	-25
				2345 - 2365	-52.590	-13
				Above 2365	-52.788	-40
			1/0	Below 2288	-53.021	-40
				2288 - 2292	-52.849	-37
				2292 - 2296	-52.616	-31
				2296 - 2300	-52.032	-25
				2300 - 2305	-47.445	-13
			1/24	2315 - 2316	-21.948	-13

				2316 - 2320	-31.479	-13
				2320 - 2324	-48.517	-25
				2324 - 2328	-50.432	-31
				2328 - 2337	-52.595	-37
				2337 - 2341	-52.733	-31
				2341 - 2345	-52.730	-25
				2345 - 2365	-52.512	-13
				Above 2365	-52.740	-40
10	2310.0	QPSK	1/0	Below 2288	-53.012	-40
				2288 - 2292	-52.709	-37
				2292 - 2296	-51.697	-31
				2296 - 2300	-48.813	-25
				2300 - 2304	-33.446	-13
				2304 - 2305	-30.360	-13
			1/49	2315 - 2316	-29.430	-13
				2316 - 2320	-31.296	-13
				2320 - 2324	-48.440	-25
				2324 - 2328	-51.399	-31
				2328 - 2337	-52.516	-37
				2337 - 2341	-52.746	-31
				2341 - 2345	-52.707	-25
				2345 - 2365	-52.499	-13
				Above 2365	-52.733	-40


Note:

- Plots of the EUT's Band Edge are shown Page 69 ~ 180.

8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE


- MODE: LTE 30
- OPERATING FREQUENCY: 2307,500,000 Hz
- BANDWIDTH: 27685 (5 MHz)
- REFERENCE VOLTAGE: 3.880 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	2307 500 005	0.00	0.000 000	0.0000
100 %		-30	2307 500 015	9.40	0.000 000	0.0041
100 %		-20	2307 500 014	8.90	0.000 000	0.0039
100 %		-10	2307 500 013	8.10	0.000 000	0.0035
100 %		0	2307 500 015	9.70	0.000 000	0.0042
100 %		+10	2307 500 015	9.50	0.000 000	0.0041
100 %		+30	2307 500 012	6.50	0.000 000	0.0028
100 %		+40	2307 500 011	5.80	0.000 000	0.0025
100 %		+50	2307 500 012	6.90	0.000 000	0.0030
Batt. Endpoint		3.400	2307 500 013	8.30	0.000 000	0.0036

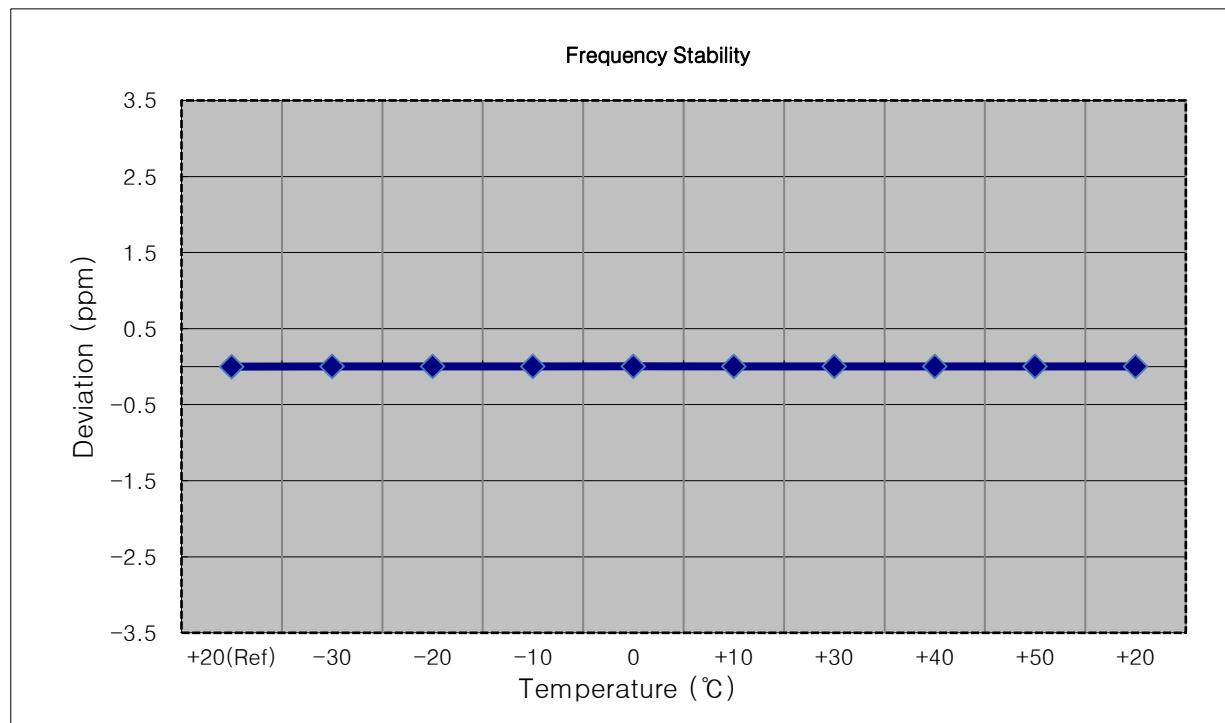


- MODE: LTE 30
- OPERATING FREQUENCY: 2310,000,000 Hz
- BANDWIDTH: 27710 (5 MHz)
- REFERENCE VOLTAGE: 3.880 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	2309 999 990	0.00	0.000 000	0.0000
100 %		-30	2309 999 985	-4.40	0.000 000	-0.0019
100 %		-20	2309 999 984	-5.60	0.000 000	-0.0024
100 %		-10	2309 999 985	-5.30	0.000 000	-0.0023
100 %		0	2309 999 984	-5.60	0.000 000	-0.0024
100 %		+10	2309 999 982	-7.60	0.000 000	-0.0033
100 %		+30	2309 999 985	-4.50	0.000 000	-0.0019
100 %		+40	2309 999 983	-6.50	0.000 000	-0.0028
100 %		+50	2309 999 983	-7.10	0.000 000	-0.0031
Batt. Endpoint		3.400	2309 999 982	-8.20	0.000 000	-0.0035

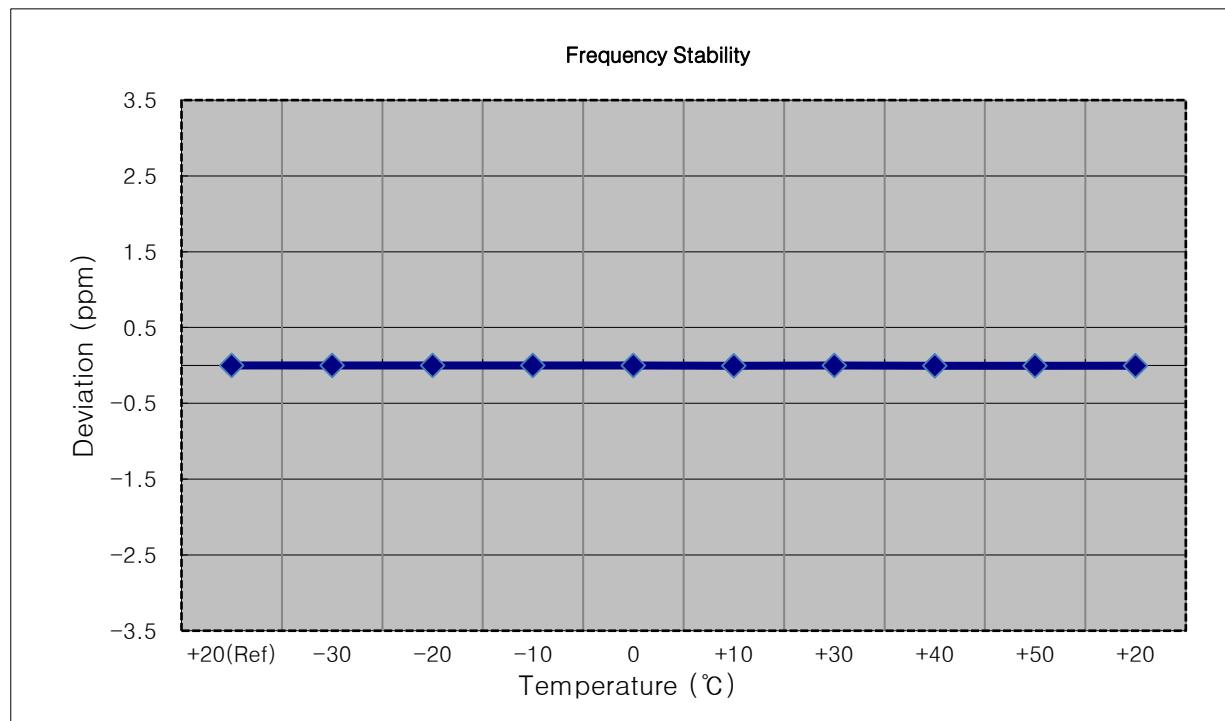


- MODE: LTE 30
 OPERATING FREQUENCY: 2312,500,000 Hz
 BANDWIDTH: 27735 (5 MHz)
 REFERENCE VOLTAGE: 3.880 VDC
 DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	2312 499 994	0.00	0.000 000	0.0000
100 %		-30	2312 499 985	-9.10	0.000 000	-0.0039
100 %		-20	2312 499 990	-4.00	0.000 000	-0.0017
100 %		-10	2312 499 988	-6.20	0.000 000	-0.0027
100 %		0	2312 499 988	-6.20	0.000 000	-0.0027
100 %		+10	2312 499 989	-5.10	0.000 000	-0.0022
100 %		+30	2312 499 988	-5.70	0.000 000	-0.0025
100 %		+40	2312 499 987	-7.00	0.000 000	-0.0030
100 %		+50	2312 499 987	-7.60	0.000 000	-0.0033
Batt. Endpoint	3.400	+20	2312 499 987	-6.70	0.000 000	-0.0029

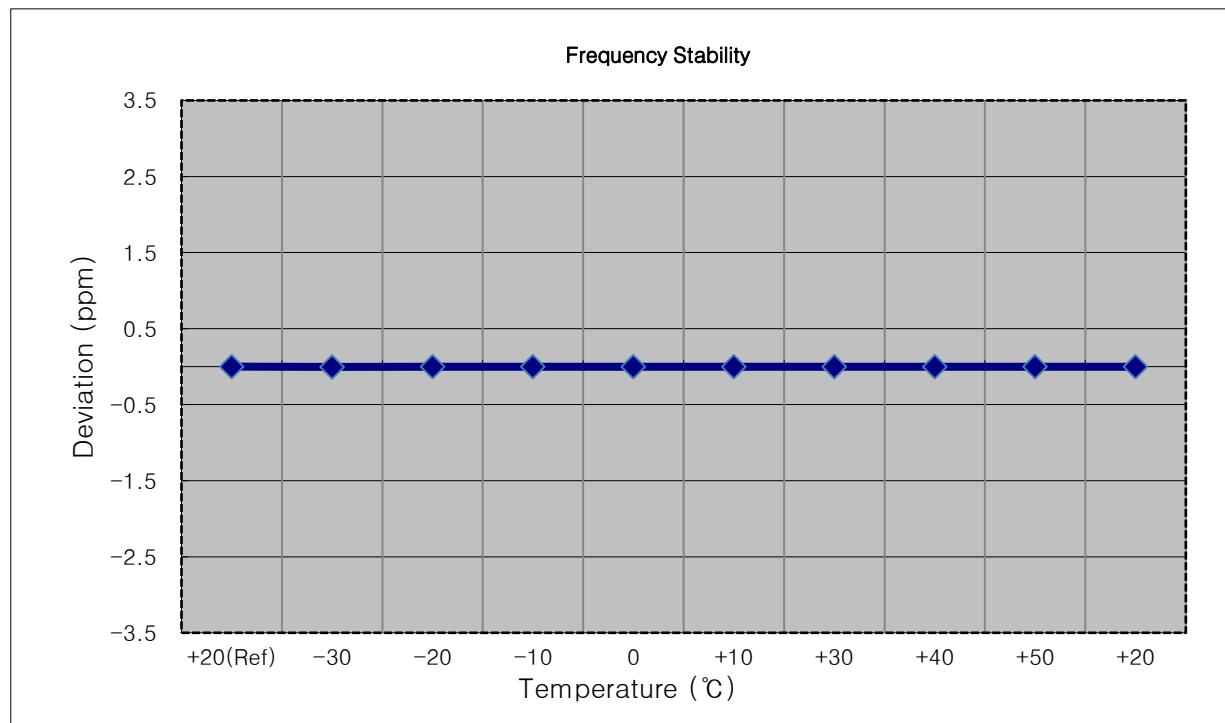

- MODE: LTE 30
- OPERATING FREQUENCY: 2310,000,000 Hz
- BANDWIDTH: 27710 (10 MHz)
- REFERENCE VOLTAGE: 3.880 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	2310 000 006	0.00	0.000 000	0.0000
100 %		-30	2310 000 012	6.30	0.000 000	0.0027
100 %		-20	2310 000 012	5.80	0.000 000	0.0025
100 %		-10	2310 000 010	3.80	0.000 000	0.0016
100 %		0	2310 000 012	5.90	0.000 000	0.0026
100 %		+10	2310 000 010	4.40	0.000 000	0.0019
100 %		+30	2310 000 011	5.40	0.000 000	0.0023
100 %		+40	2310 000 015	9.20	0.000 000	0.0040
100 %		+50	2310 000 010	4.50	0.000 000	0.0019
Batt. Endpoint	3.400	+20	2310 000 011	5.20	0.000 000	0.0023

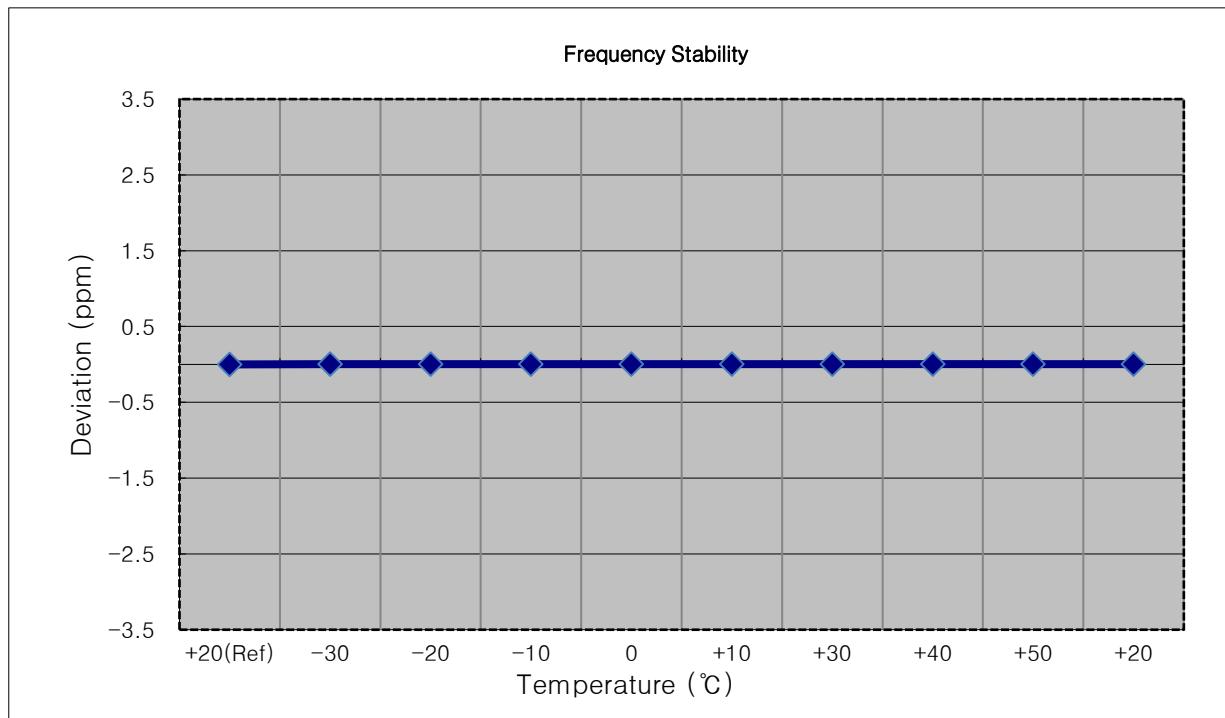

9. TEST DATA (Sub 2 Ant)

9.1 EQUIVALENT ISOTROPIC RADIATED POWER

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP		RB		
									W	W	dBm	Size	Offset
2307.5	LTE B30/ 5 MHz	QPSK	-22.44	13.93	10.00	2.30	H	< 0.25	0.146	21.63	1	0	
		16-QAM	-23.38	12.99	10.00	2.30	H		0.117	20.69			
		64-QAM	-24.10	12.27	10.00	2.30	H		0.099	19.97			
		256-QAM	-26.50	9.87	10.00	2.30	H		0.057	17.57			
2310.0		QPSK	-22.91	13.46	10.00	2.30	H	< 0.25	0.131	21.16	1	0	
		16-QAM	-23.75	12.62	10.00	2.30	H		0.108	20.32			
		64-QAM	-24.50	11.87	10.00	2.30	H		0.091	19.57			
		256-QAM	-26.86	9.51	10.00	2.30	H		0.053	17.21			
2312.5		QPSK	-22.79	13.58	10.00	2.30	H	< 0.25	0.134	21.28	1	0	
		16-QAM	-23.70	12.67	10.00	2.30	H		0.109	20.37			
		64-QAM	-24.41	11.96	10.00	2.30	H		0.092	19.66			
		256-QAM	-26.72	9.65	10.00	2.30	H		0.054	17.35			

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP		RB	
									W	W	dBm	Size
2310.0	LTE B30/ 10 MHz	QPSK	-22.53	13.84	10.00	2.30	H	< 0.25	0.143	21.54	1	0
		16-QAM	-23.45	12.92	10.00	2.30	H		0.115	20.62		
		64-QAM	-24.19	12.18	10.00	2.30	H		0.097	19.88		
		256-QAM	-26.47	9.90	10.00	2.30	H		0.058	17.60		

9.2 RADIATED SPURIOUS EMISSIONS

- OPERATING FREQUENCY : 2307.5 MHz
 MEASURED OUTPUT POWER: 21.63 dBm = 0.146 W
 MODE: LTE B30
 MODULATION SIGNAL: 5 MHz QPSK
 DISTANCE: 1 meters
 LIMIT: -40 dBm

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Limit (dBm)	Detector	RB	
										Size	Offset
27685 (2307.5)	4 615.00	-48.64	11.50	-52.41	3.43	H	-44.34	-40.00	Peak	1	0
	6 922.50	-63.01	10.90	-57.81	4.32	V	-51.23	-40.00	Peak		
	9 230.00	-56.42	10.80	-48.95	5.02	V	-43.17	-40.00	Peak		
	11 537.50	-64.96	11.50	-54.17	5.72	V	-48.39	-40.00	Peak		
	13 845.00	-65.31	12.40	-55.09	6.35	H	-49.04	-40.00	Average		
	16 152.50	-63.69	15.90	-54.06	6.91	V	-45.07	-40.00	Peak		
27710 (2310.0)	4 620.00	-48.81	11.50	-52.66	3.43	V	-44.59	-40.00	Peak	1	0
	6 930.00	-63.45	10.90	-58.21	4.32	V	-51.63	-40.00	Peak		
	9 240.00	-56.86	10.80	-48.78	5.06	V	-43.04	-40.00	Peak		
	11 550.00	-65.44	11.70	-53.79	5.72	V	-47.81	-40.00	Peak		
	13 860.00	-64.66	12.40	-54.37	6.35	H	-48.32	-40.00	Average		
	16 170.00	-63.14	15.90	-53.38	6.93	V	-44.41	-40.00	Peak		
27735 (2312.5)	4 625.00	-48.13	11.50	-52.14	3.44	V	-44.08	-40.00	Peak	1	0
	6 937.50	-63.94	10.90	-58.82	4.32	H	-52.24	-40.00	Peak		
	9 250.00	-56.65	10.80	-48.93	5.10	V	-43.23	-40.00	Peak		
	11 562.50	-64.98	11.70	-53.49	5.72	V	-47.51	-40.00	Peak		
	13 875.00	-64.90	12.40	-54.92	6.33	H	-48.85	-40.00	Average		
	16 187.50	-64.60	15.90	-54.72	6.94	V	-45.76	-40.00	Peak		

OPERATING FREQUENCY : 2310.00 MHz
 MEASURED OUTPUT POWER: 21.54 dBm = 0.143 W
 MODE: LTE B30
 MODULATION SIGNAL: 10 MHz QPSK
 DISTANCE: 1 meters
 LIMIT: -40 dBm

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Limit (dBm)	Detector	RB	
										Size	Offset
27710 (2310.0)	4 620.00	-49.30	11.50	-53.15	3.43	H	-45.08	-40.00	Peak	1	0
	6 930.00	-63.37	10.90	-58.13	4.32	H	-51.55	-40.00	Peak		
	9 240.00	-61.04	10.80	-52.96	5.06	V	-47.22	-40.00	Average		
	11 550.00	-63.89	11.70	-52.24	5.72	H	-46.26	-40.00	Peak		
	13 860.00	-65.88	12.40	-55.59	6.35	H	-49.54	-40.00	Average		
	16 170.00	-64.47	15.90	-54.71	6.93	V	-45.74	-40.00	Peak		

9.3 PEAK-TO-AVERAGE RATIO

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (dB)
30	5 MHz	2310.0	QPSK	25	0	5.09
			16-QAM			5.89
			64-QAM			6.41
			256-QAM			6.76
	10 MHz		QPSK	50		5.19
			16-QAM			5.93
			64-QAM			6.41
			256-QAM			6.74

Note:

- Plots of the EUT's Peak- to- Average Ratio are shown Page 198 ~ 205.

9.4 OCCUPIED BANDWIDTH

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (MHz)	
30	5 MHz	2310.0	QPSK	25	0	4.5083	
			16-QAM			4.5095	
			64-QAM			4.5122	
			256-QAM			4.5136	
	10 MHz		QPSK	50		9.0292	
			16-QAM			8.9761	
			64-QAM			8.9792	
			256-QAM			9.0038	

Note:

- Plots of the EUT's Occupied Bandwidth are shown Page 190 ~ 197.

9.5 CONDUCTED SPURIOUS EMISSIONS

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
30	5	2307.5	9.6959	30.820	-80.760	-49.940	-40.00
		2310.0	8.8455	30.820	-80.762	-49.942	
		2312.5	6.0479	30.820	-79.870	-49.050	
	10	2310.0	25.7972	32.350	-80.434	-48.084	

Note:

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 318 ~ 325.
2. Conducted Spurious Emissions was Tested QPSK Modulation, Resource Block Size 1 and Resource Block Offset 0
3. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
4. Factor(dB) = Cable Loss + Attenuator + Power Splitter

Frequency Range (GHz)	Factor [dB]
0.03 – 1	27.494
1 – 5	30.200
5 – 10	30.820
10 – 15	31.340
15 – 20	31.710
Above 20	32.350

9.6 BAND EDGE

Band Width (MHz)	Frequency (MHz)	Modulation	RB (Size/ Offset)	Frequency Range (MHz)	Maximum Data (dBm)	Limit (dBm)
5	2307.5	QPSK	25/0	Below 2288	-58.102	-40
				2288 - 2292	-54.202	-37
				2292 - 2296	-48.676	-31
				2296 - 2300	-33.020	-25
				2300 - 2304	-23.670	-13
				2304 - 2305	-27.526	-13
				2315 - 2320	-32.384	-13
				2320 - 2324	-48.018	-25
				2324 - 2328	-55.381	-31
				2328 - 2337	-64.014	-37
				2337 - 2341	-65.192	-31
				2341 - 2345	-65.162	-25
				2345 - 2365	-65.234	-13
				Above 2365	-65.418	-40
5	2310.0	QPSK	25/0	Below 2288	-59.976	-40
				2288 - 2292	-55.350	-37
				2292 - 2296	-51.315	-31
				2296 - 2300	-42.299	-25
				2300 - 2305	-25.372	-13
				2315 - 2320	-26.154	-13
				2320 - 2324	-43.730	-25
				2324 - 2328	-50.620	-31
				2328 - 2337	-60.049	-37
				2337 - 2341	-65.208	-31
				2341 - 2345	-65.117	-25
				2345 - 2365	-65.082	-13
				Above 2365	-65.352	-40
5	2312.5	QPSK	25/0	Below 2288	-61.704	-40
				2288 - 2292	-56.609	-37
				2292 - 2296	-50.435	-31
				2296 - 2300	-45.281	-25
				2300 - 2305	-28.602	-13
				2315 - 2316	-26.347	-13

				2316 - 2320	-19.402	-13
				2320 - 2324	-31.669	-25
				2324 - 2328	-43.221	-31
				2328 - 2337	-54.387	-37
				2337 - 2341	-65.102	-31
				2341 - 2345	-65.157	-25
				2345 - 2365	-65.046	-13
				Above 2365	-65.314	-40
10	2310.0	QPSK	50/0	Below 2288	-45.162	-40
				2288 - 2292	-39.917	-37
				2292 - 2296	-32.083	-31
				2296 - 2300	-28.803	-25
				2300 - 2304	-24.406	-13
				2304 - 2305	-30.759	-13
				2315 - 2316	-31.400	-13
				2316 - 2320	-25.088	-13
				2320 - 2324	-28.303	-25
				2324 - 2328	-32.006	-31
				2328 - 2337	-46.000	-37
				2337 - 2341	-65.102	-31
				2341 - 2345	-65.149	-25
				2345 - 2365	-65.005	-13
				Above 2365	-65.159	-40

Band Width (MHz)	Frequency (MHz)	Modulation	RB (Size/ Offset)	Frequency Range (MHz)	Maximum Data (dBm)	Limit (dBm)
5	2307.5	QPSK	1/0	Below 2288	-60.716	-40
				2288 - 2292	-59.031	-37
				2292 - 2296	-53.203	-31
				2296 - 2300	-49.508	-25
				2300 - 2304	-16.829	-13
				2304 - 2305	-22.398	-13
			1/24	2315 - 2320	-50.281	-13
				2320 - 2324	-57.616	-25
				2324 - 2328	-59.696	-31
				2328 - 2337	-64.752	-37
				2337 - 2341	-65.277	-31
				2341 - 2345	-65.207	-25
				2345 - 2365	-65.181	-13
				Above 2365	-65.439	-40
			1/0	Below 2288	-61.909	-40
				2288 - 2292	-60.301	-37
				2292 - 2296	-58.617	-31
				2296 - 2300	-48.954	-25
				2300 - 2305	-25.687	-13
5	2310.0	QPSK	1/24	2315 - 2320	-27.597	-13
				2320 - 2324	-47.714	-25
				2324 - 2328	-58.103	-31
				2328 - 2337	-64.172	-37
				2337 - 2341	-65.156	-31
				2341 - 2345	-65.185	-25
				2345 - 2365	-65.020	-13
				Above 2365	-65.242	-40
			1/0	Below 2288	-62.791	-40
				2288 - 2292	-61.442	-37
				2292 - 2296	-59.895	-31
				2296 - 2300	-57.145	-25
				2300 - 2305	-49.806	-13
			1/24	2315 - 2316	-22.079	-13

				2316 - 2320	-17.993	-13
				2320 - 2324	-47.854	-25
				2324 - 2328	-53.100	-31
				2328 - 2337	-63.381	-37
				2337 - 2341	-65.060	-31
				2341 - 2345	-65.003	-25
				2345 - 2365	-64.945	-13
				Above 2365	-65.183	-40
10	2310.0	QPSK	1/0	Below 2288	-60.255	-40
				2288 - 2292	-58.139	-37
				2292 - 2296	-54.889	-31
				2296 - 2300	-49.835	-25
				2300 - 2304	-16.725	-13
				2304 - 2305	-31.195	-13
			1/49	2315 - 2316	-29.894	-13
				2316 - 2320	-18.093	-13
				2320 - 2324	-49.621	-25
				2324 - 2328	-54.665	-31
				2328 - 2337	-63.113	-37
				2337 - 2341	-65.191	-31
				2341 - 2345	-65.257	-25
				2345 - 2365	-65.100	-13
				Above 2365	-65.334	-40


Note:

- Plots of the EUT's Band Edge are shown Page 206 ~ 317.

9.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE


- MODE: LTE 30
- OPERATING FREQUENCY: 2307,500,000 Hz
- BANDWIDTH: 27685 (5 MHz)
- REFERENCE VOLTAGE: 3.880 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	2307 500 008	0.00	0.000 000	0.0000
100 %		-30	2307 500 014	5.10	0.000 000	0.0022
100 %		-20	2307 500 016	7.80	0.000 000	0.0034
100 %		-10	2307 500 015	6.40	0.000 000	0.0028
100 %		0	2307 500 015	6.50	0.000 000	0.0028
100 %		+10	2307 500 013	5.00	0.000 000	0.0022
100 %		+30	2307 500 014	5.90	0.000 000	0.0026
100 %		+40	2307 500 014	5.40	0.000 000	0.0023
100 %		+50	2307 500 015	6.30	0.000 000	0.0027
Batt. Endpoint		3.400	2307 500 017	8.70	0.000 000	0.0038

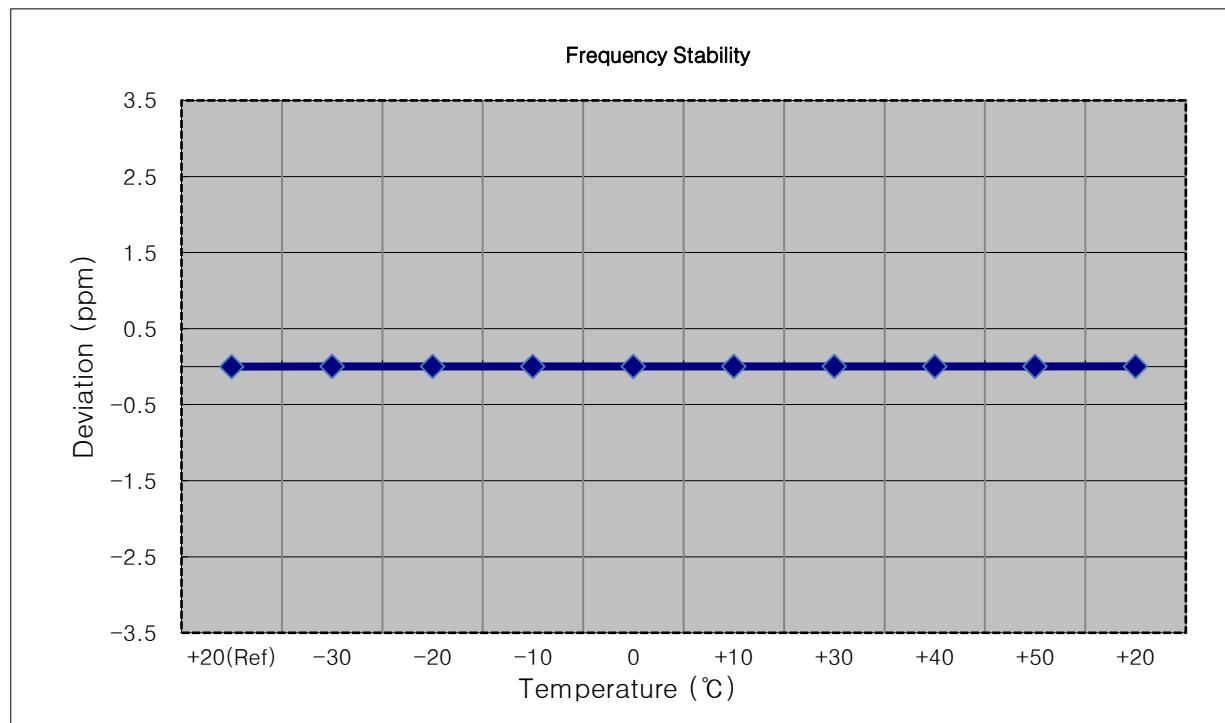


- MODE: LTE 30
- OPERATING FREQUENCY: 2310,000,000 Hz
- BANDWIDTH: 27710 (5 MHz)
- REFERENCE VOLTAGE: 3.880 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	2309 999 995	0.00	0.000 000	0.0000
100 %		-30	2309 999 990	-5.00	0.000 000	-0.0022
100 %		-20	2309 999 991	-3.60	0.000 000	-0.0016
100 %		-10	2309 999 985	-9.60	0.000 000	-0.0042
100 %		0	2309 999 990	-4.90	0.000 000	-0.0021
100 %		+10	2309 999 990	-5.10	0.000 000	-0.0022
100 %		+30	2309 999 990	-5.40	0.000 000	-0.0023
100 %		+40	2309 999 990	-4.70	0.000 000	-0.0020
100 %		+50	2309 999 992	-3.10	0.000 000	-0.0013
Batt. Endpoint	3.400	+20	2309 999 989	-6.10	0.000 000	-0.0026

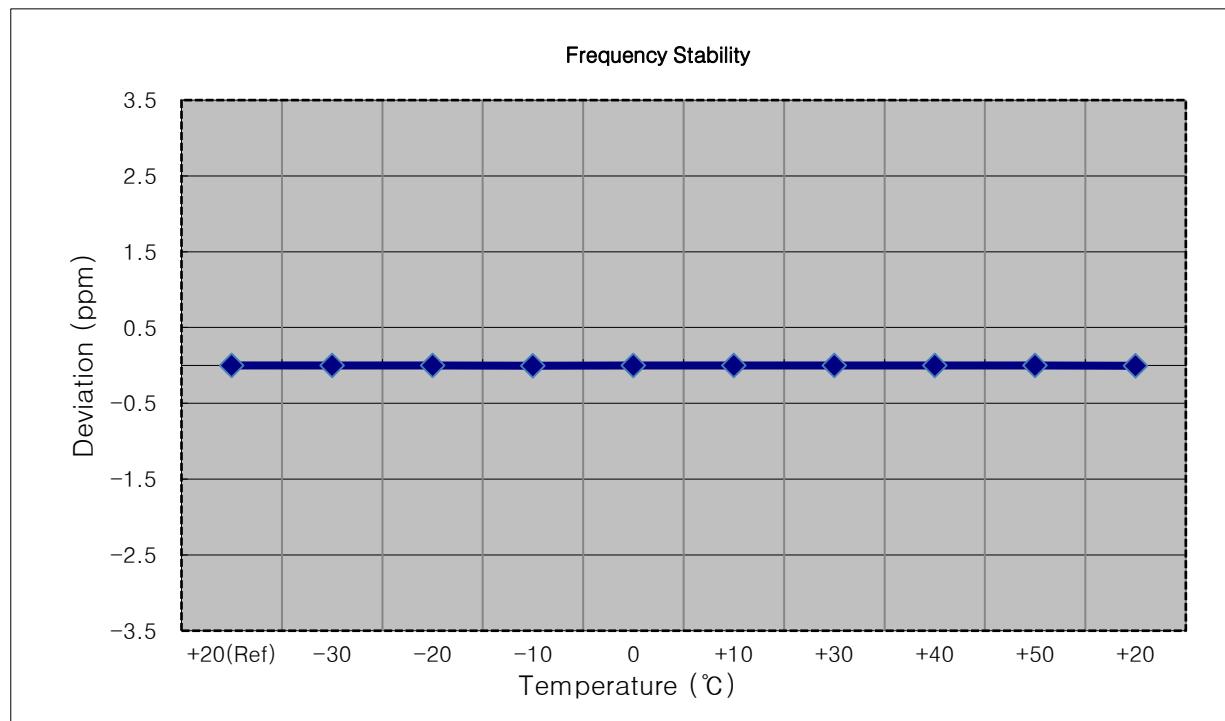


- MODE: LTE 30
- OPERATING FREQUENCY: 2312,500,000 Hz
- BANDWIDTH: 27735 (5 MHz)
- REFERENCE VOLTAGE: 3.880 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	2312 499 994	0.00	0.000 000	0.0000
100 %		-30	2312 499 989	-4.80	0.000 000	-0.0021
100 %		-20	2312 499 986	-8.00	0.000 000	-0.0035
100 %		-10	2312 499 988	-5.80	0.000 000	-0.0025
100 %		0	2312 499 987	-6.60	0.000 000	-0.0029
100 %		+10	2312 499 989	-5.20	0.000 000	-0.0022
100 %		+30	2312 499 987	-7.30	0.000 000	-0.0032
100 %		+40	2312 499 989	-5.00	0.000 000	-0.0022
100 %		+50	2312 499 990	-3.50	0.000 000	-0.0015
Batt. Endpoint		3.400	2312 499 989	-4.40	0.000 000	-0.0019

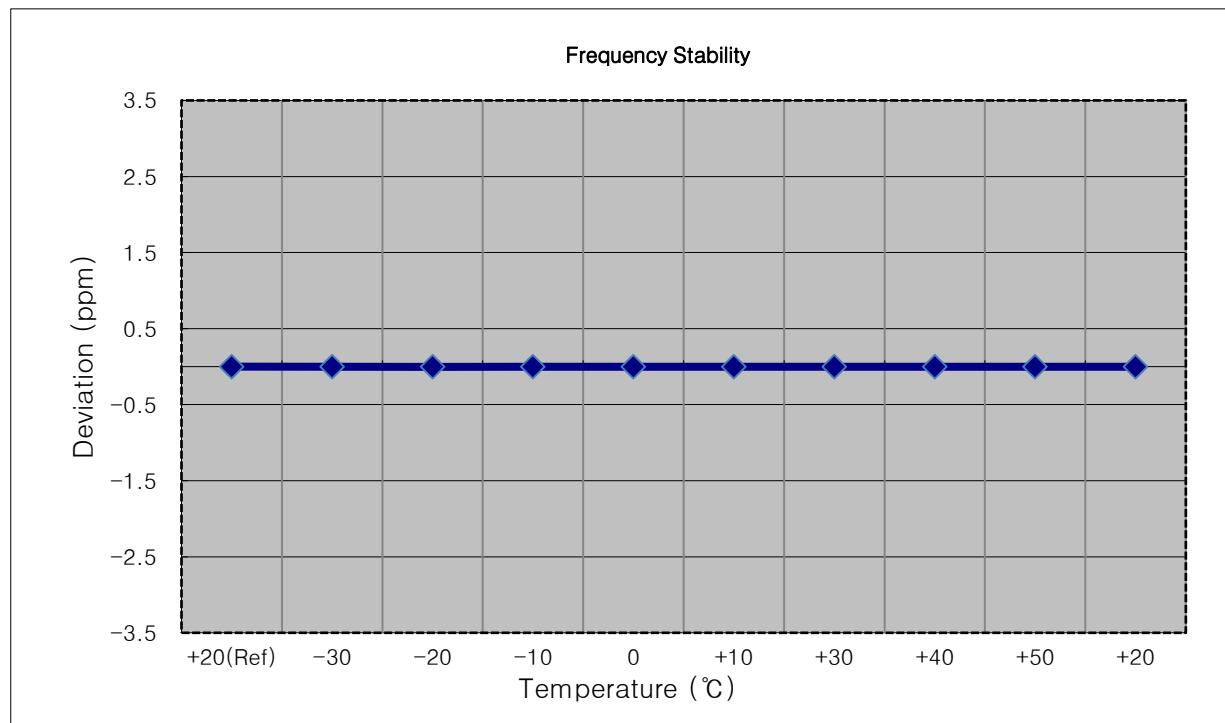


- MODE: LTE 30
 OPERATING FREQUENCY: 2310,000,000 Hz
 BANDWIDTH: 27710 (10 MHz)
 REFERENCE VOLTAGE: 3.880 VDC
 DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	2310 000 005	0.00	0.000 000	0.0000
100 %		-30	2310 000 010	5.00	0.000 000	0.0022
100 %		-20	2310 000 011	5.80	0.000 000	0.0025
100 %		-10	2310 000 011	6.10	0.000 000	0.0026
100 %		0	2310 000 009	4.10	0.000 000	0.0018
100 %		+10	2310 000 009	3.90	0.000 000	0.0017
100 %		+30	2310 000 010	5.00	0.000 000	0.0022
100 %		+40	2310 000 011	6.10	0.000 000	0.0026
100 %		+50	2310 000 009	3.50	0.000 000	0.0015
Batt. Endpoint	3.400	+20	2310 000 011	5.80	0.000 000	0.0025

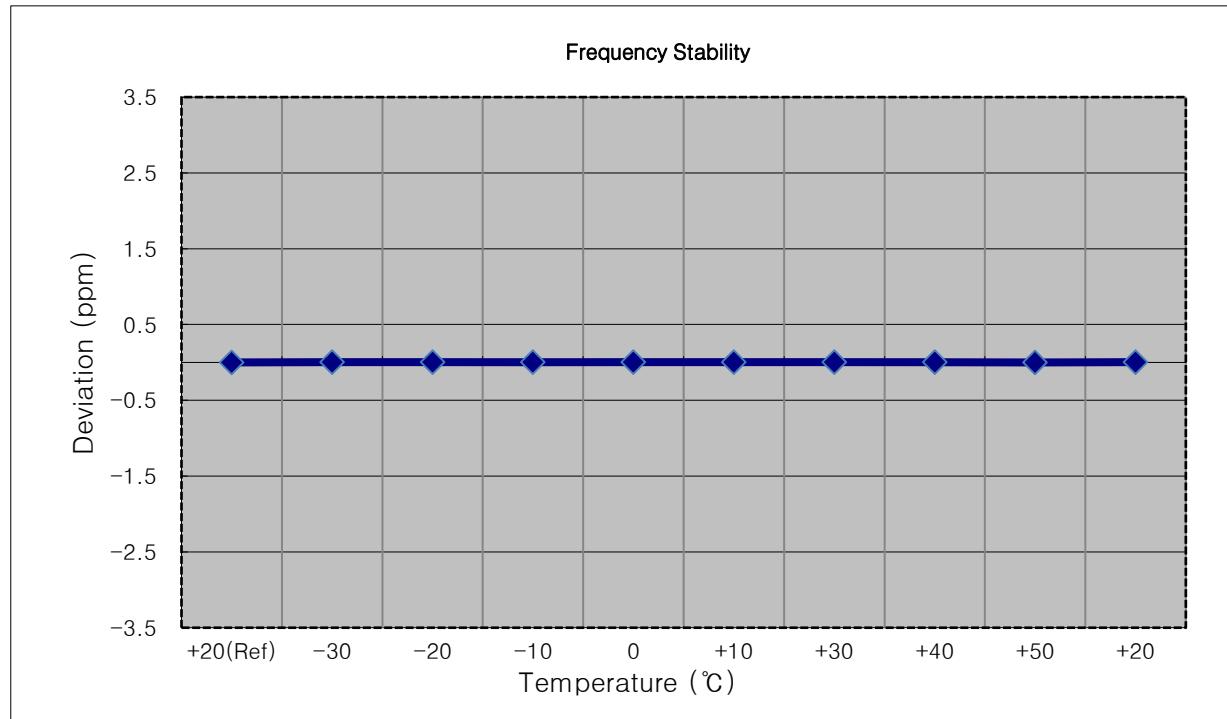


10. TEST PLOTS (Main 1 Ant)


BAND 30. Occupied Bandwidth Plot (5 MHz Ch.27710 QPSK RB 25)

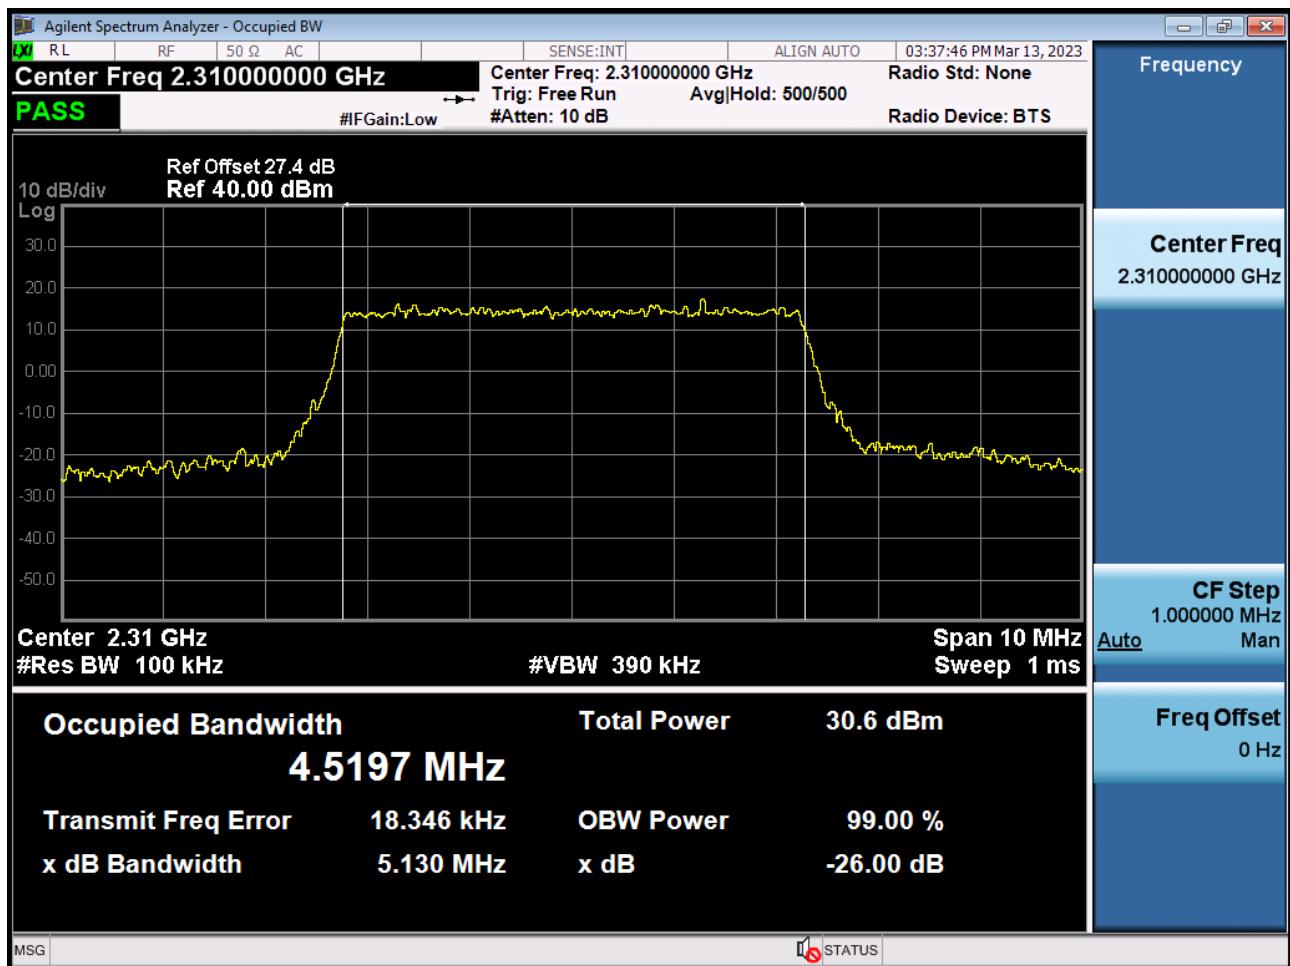


BAND 30. Occupied Bandwidth Plot (5 MHz Ch.27710 16-QAM RB 25)

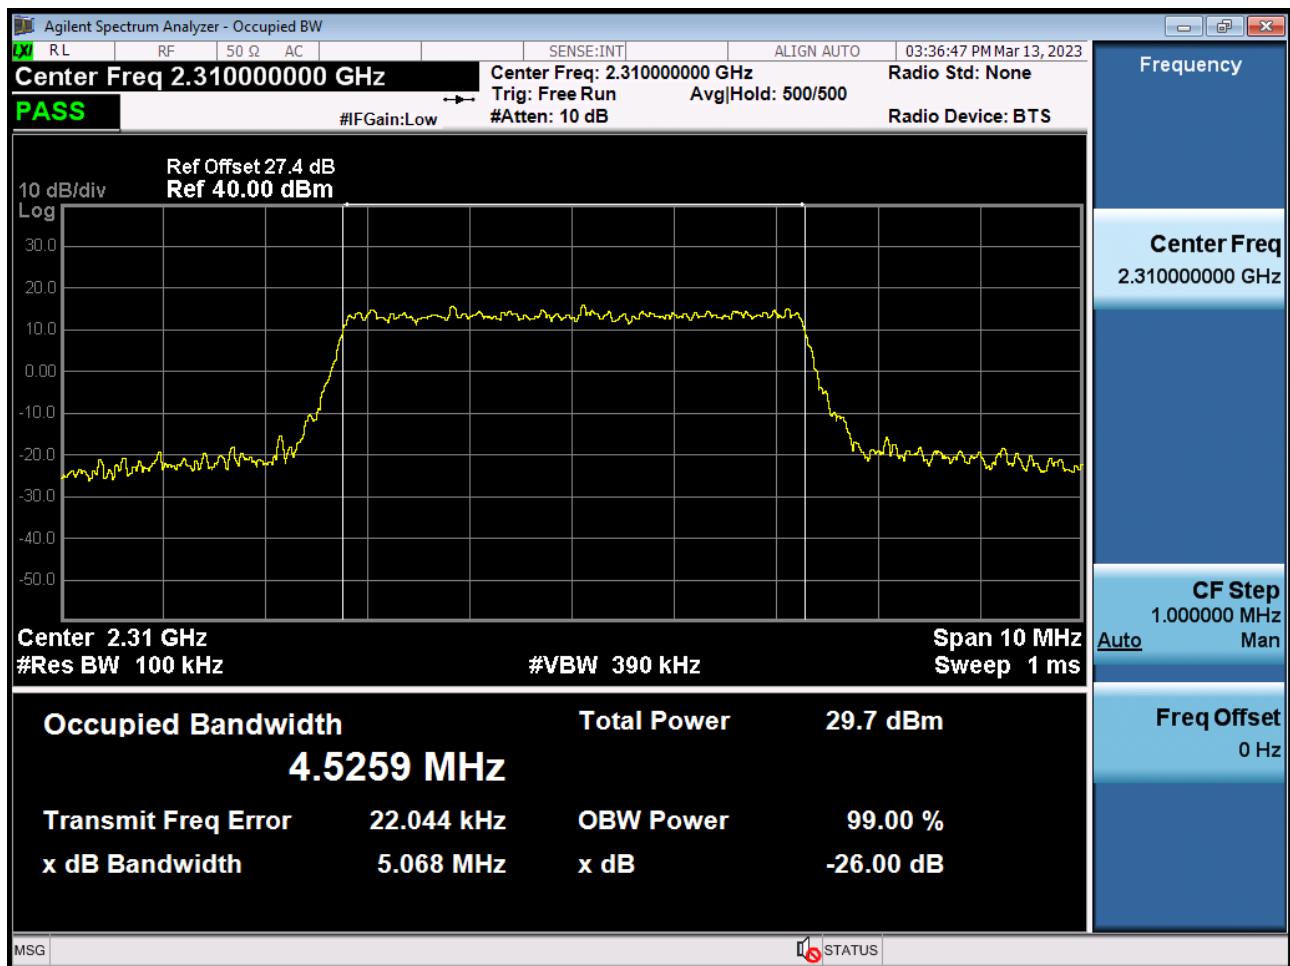


BAND 30. Occupied Bandwidth Plot (5 MHz Ch.27710 64-QAM RB 25)

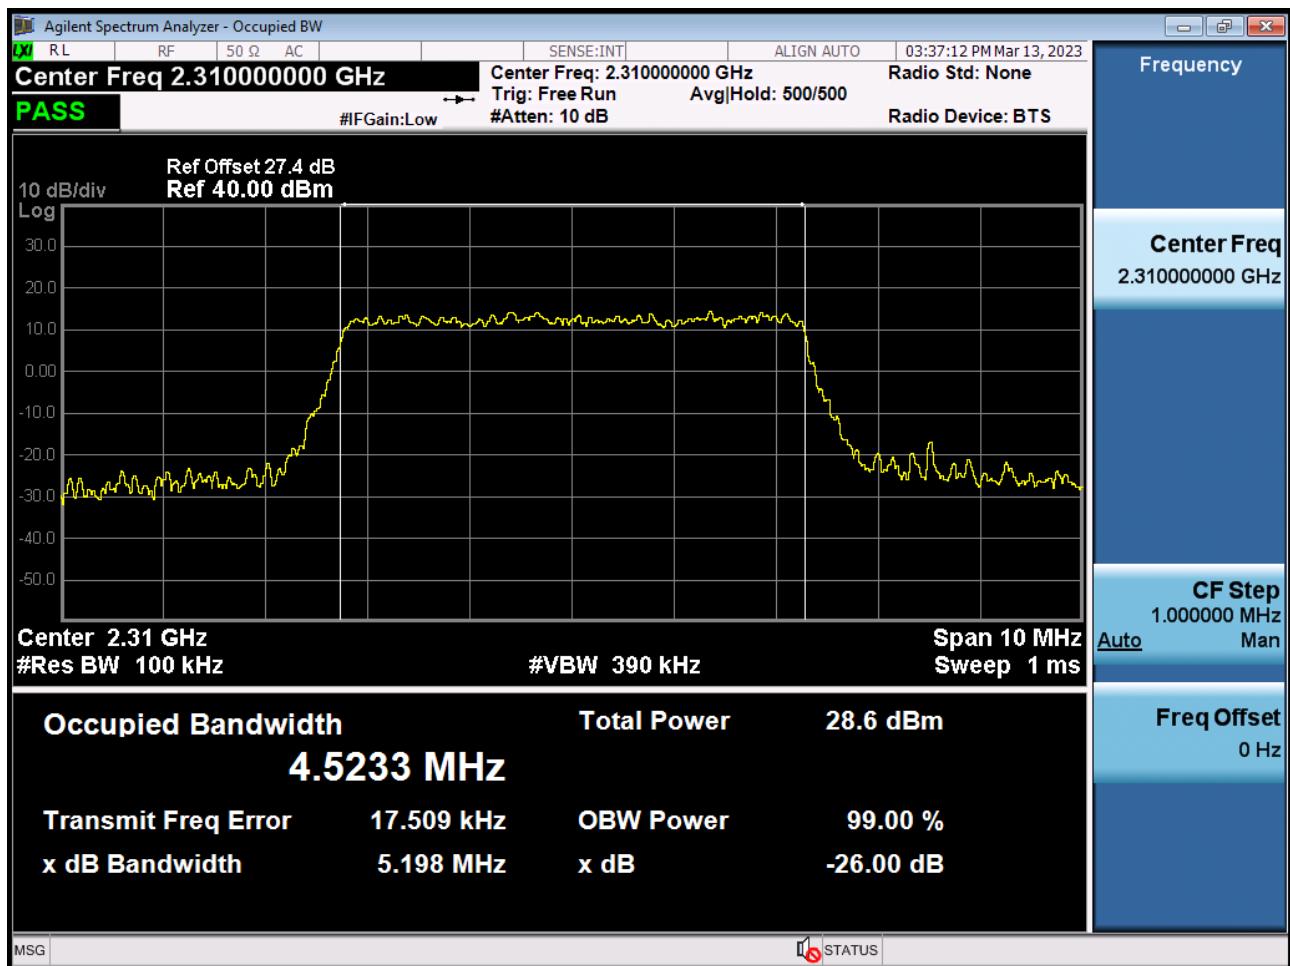


BAND 30. Occupied Bandwidth Plot (5 MHz Ch.27710 256-QAM RB 25)

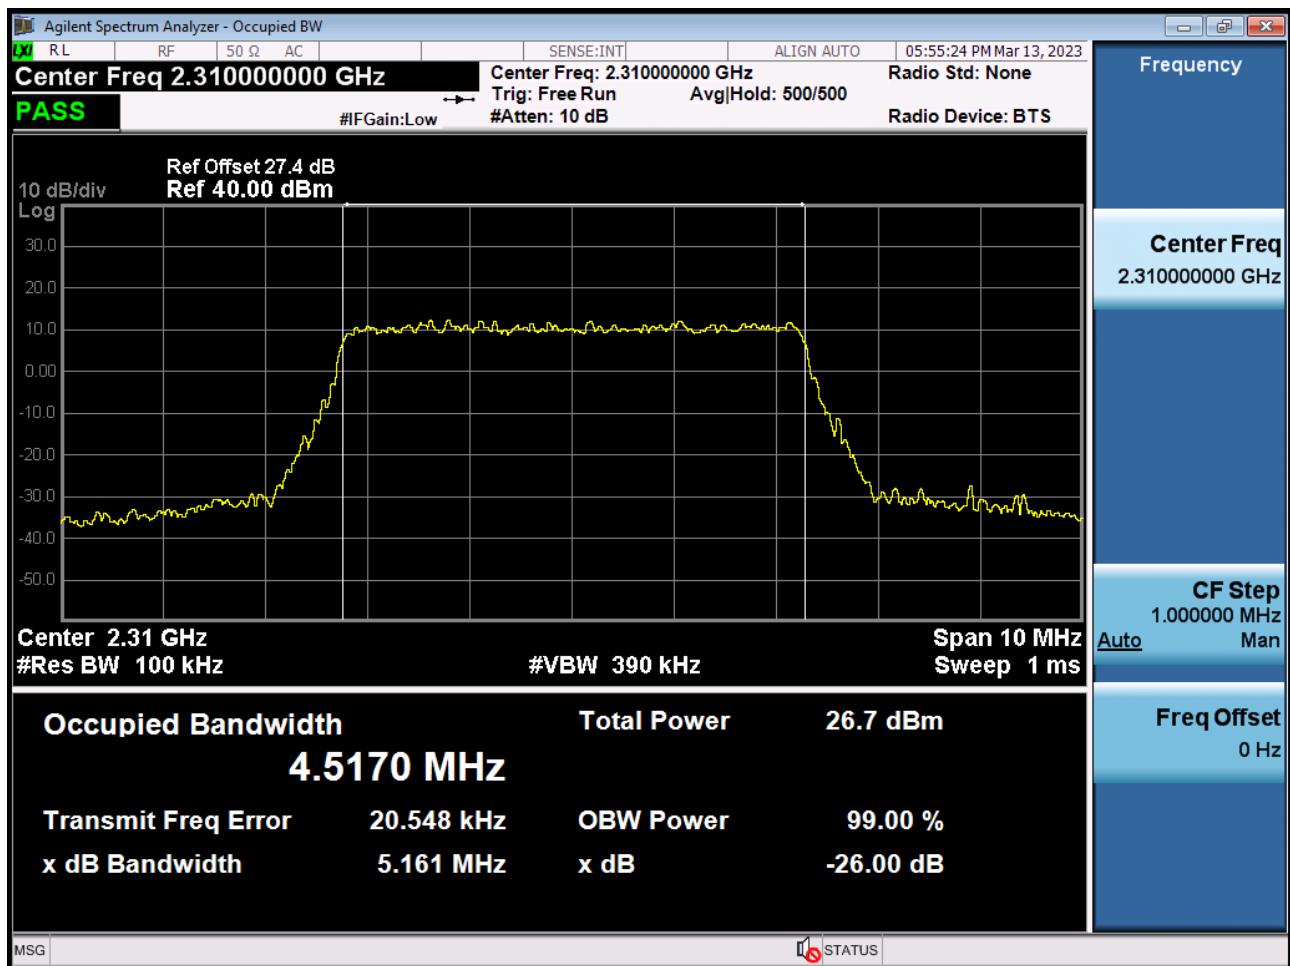


BAND 30. Occupied Bandwidth Plot (10 MHz Ch.27710 QPSK RB 50)

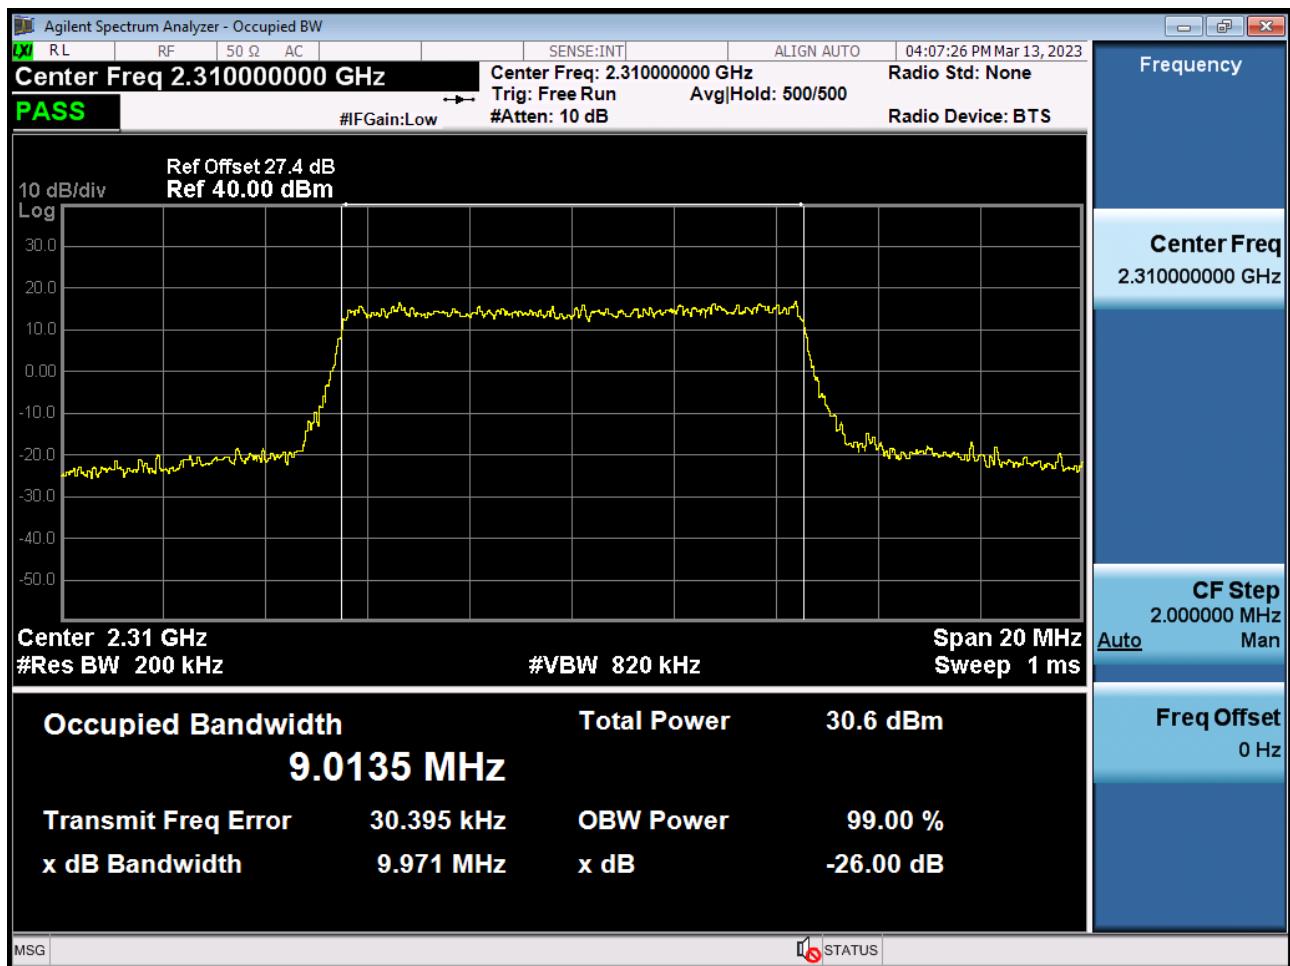


BAND 30. Occupied Bandwidth Plot (10 MHz Ch.27710 16-QAM RB 50)

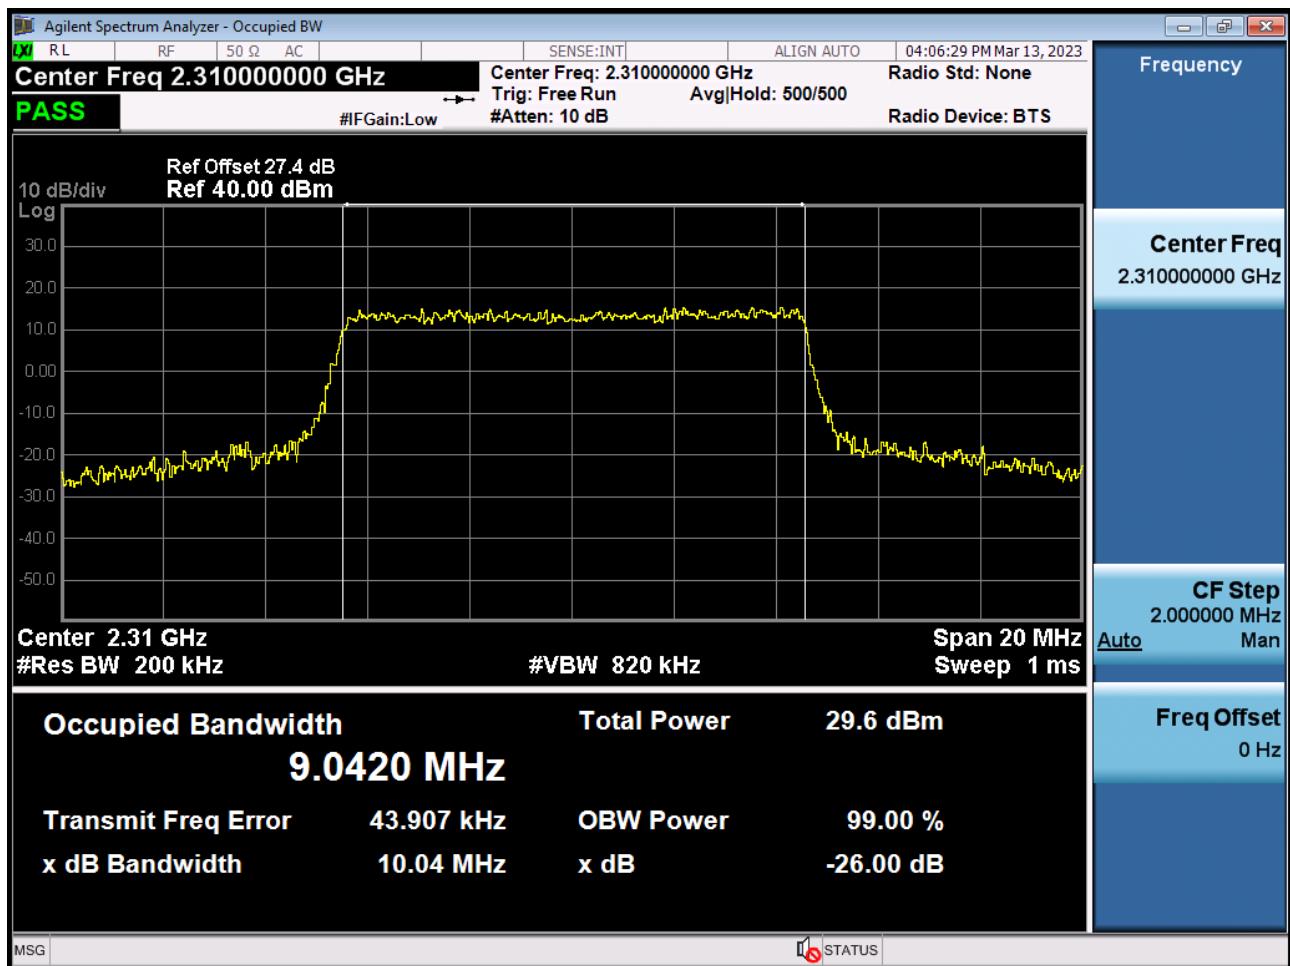


BAND 30. Occupied Bandwidth Plot (10 MHz Ch.27710 64-QAM RB 50)

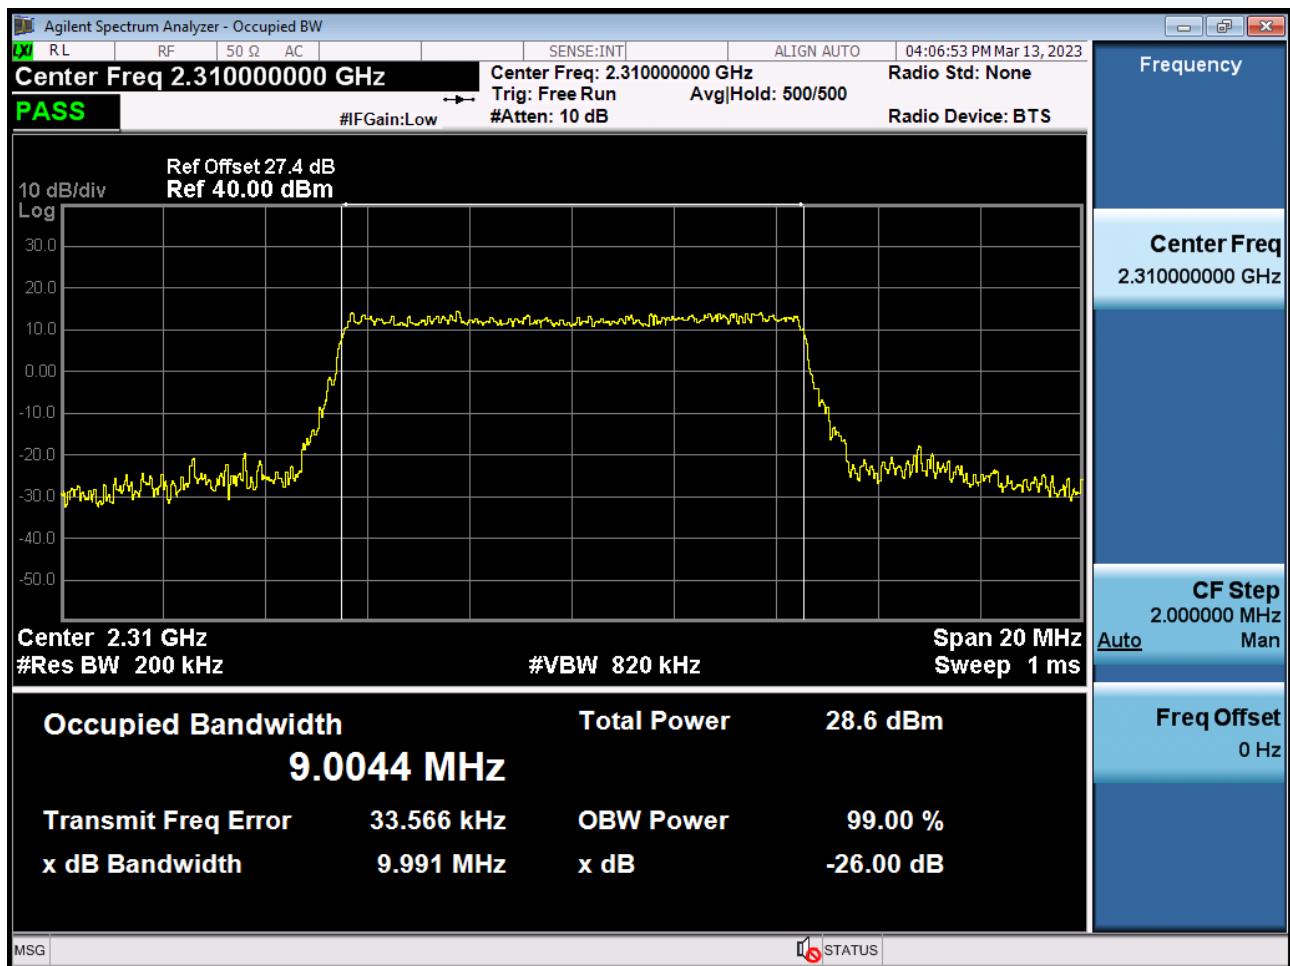


BAND 30. Occupied Bandwidth Plot (10 MHz Ch.27710 256-QAM RB 50)

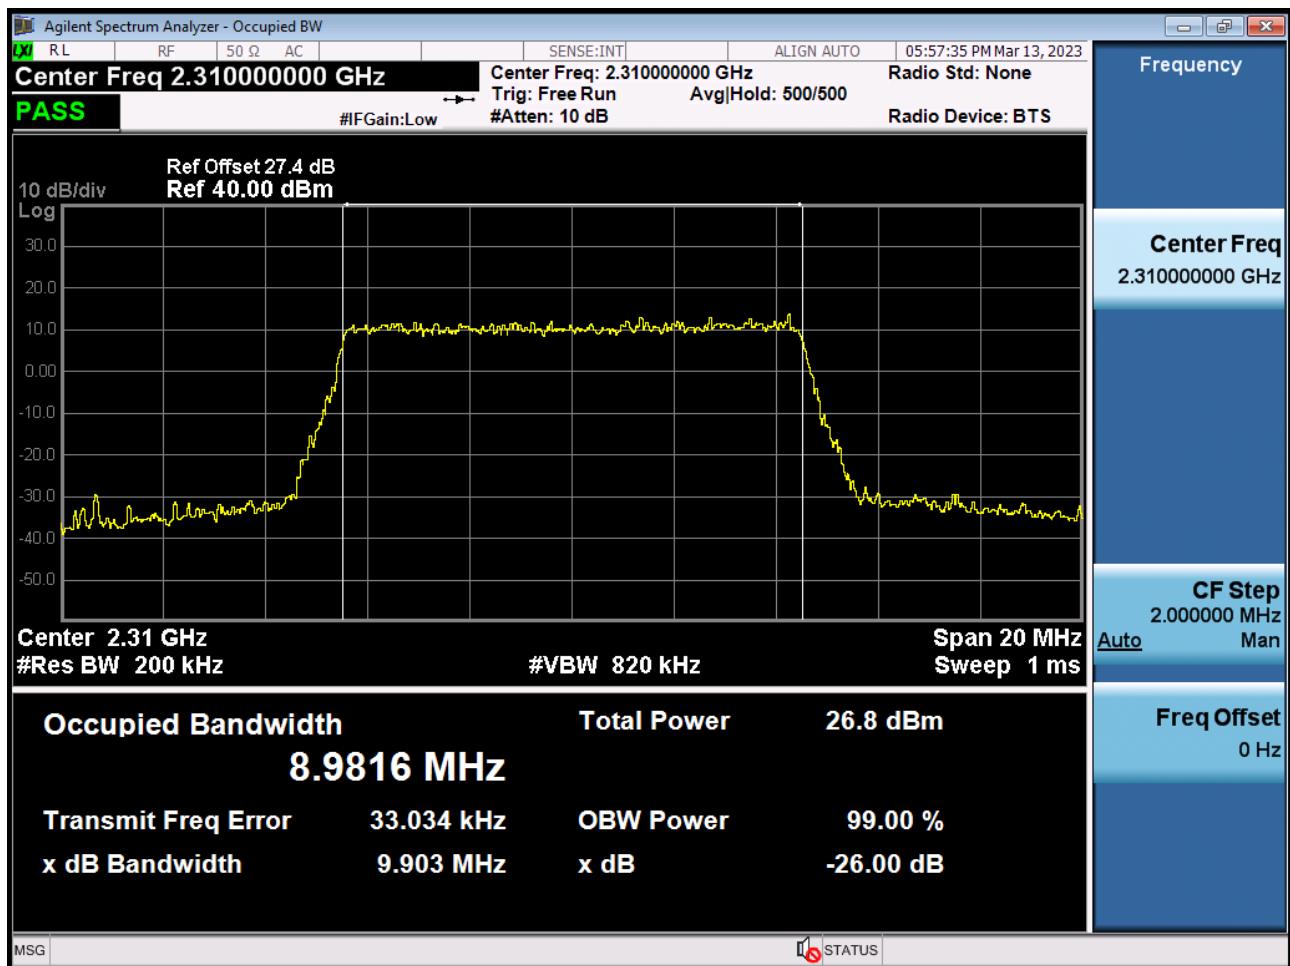


BAND 30. PAR Plot (5M BW_Ch.27710_QPSK_RB25_0)

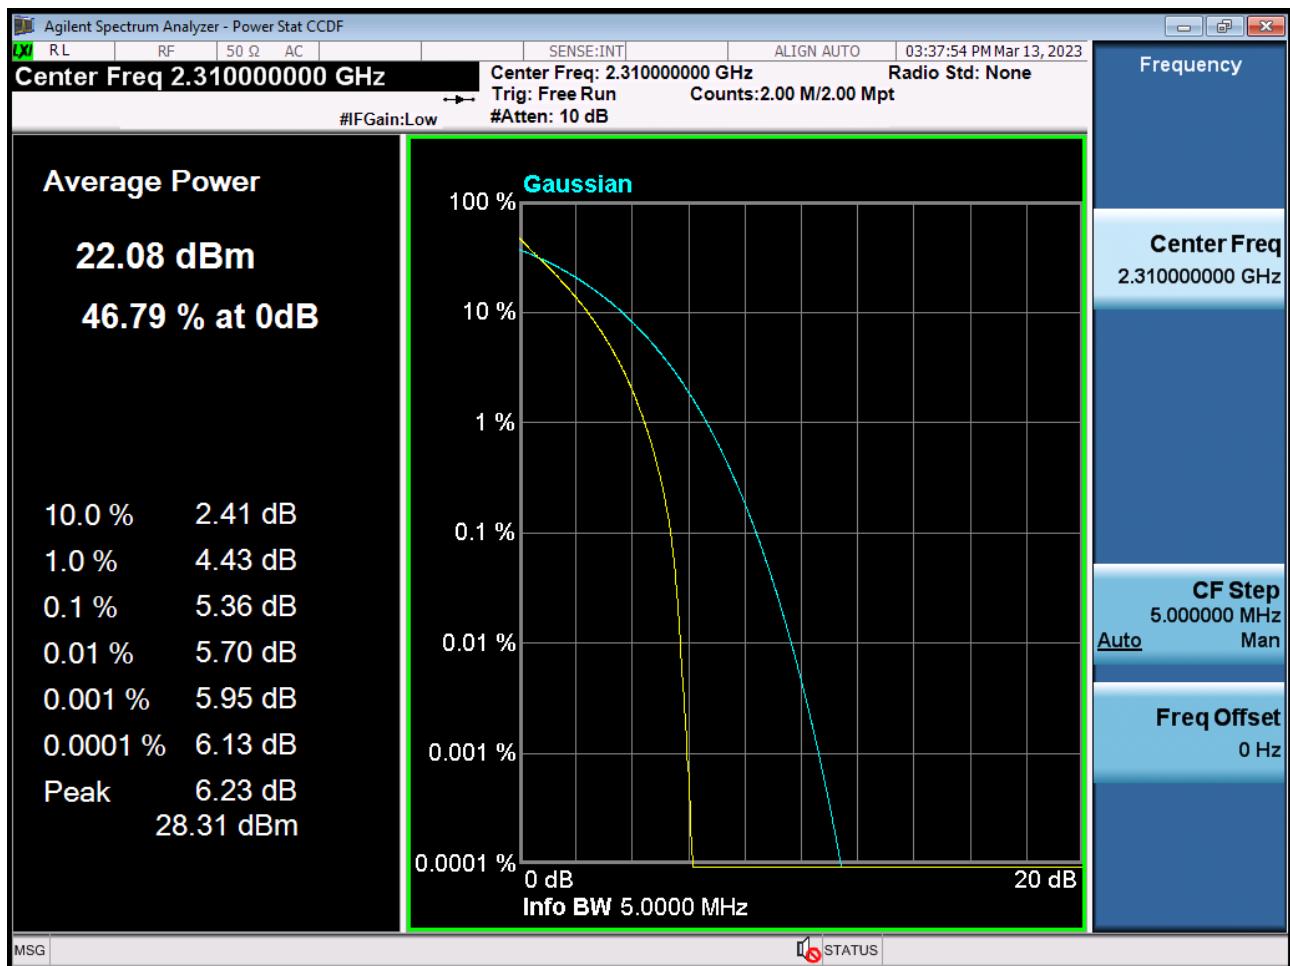


BAND 30. PAR Plot (5M BW_Ch.27710_16QAM_RB25_0)

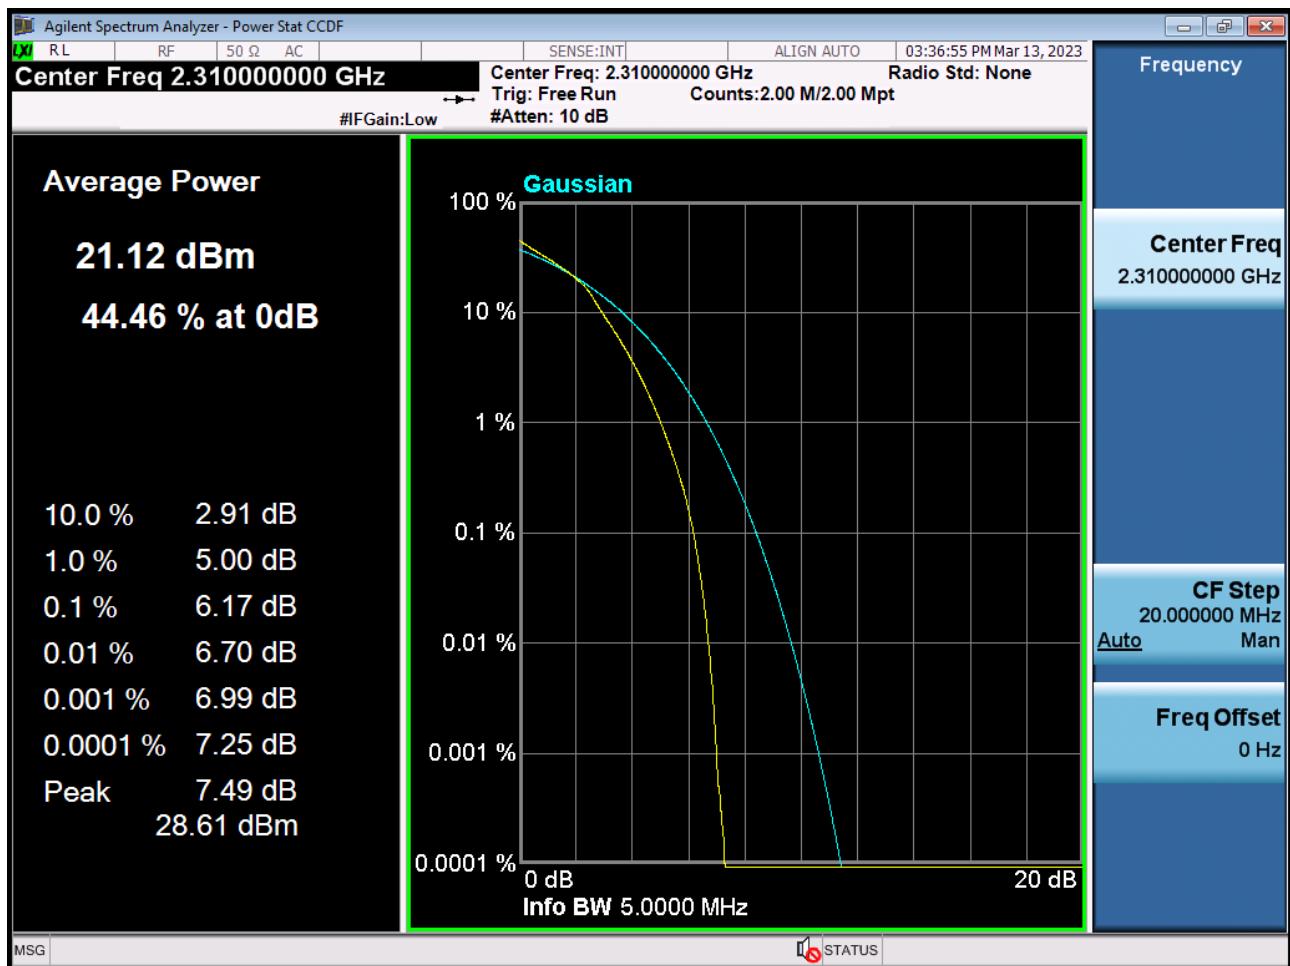


BAND 30. PAR Plot (5M BW_Ch.27710_64QAM_RB25_0)

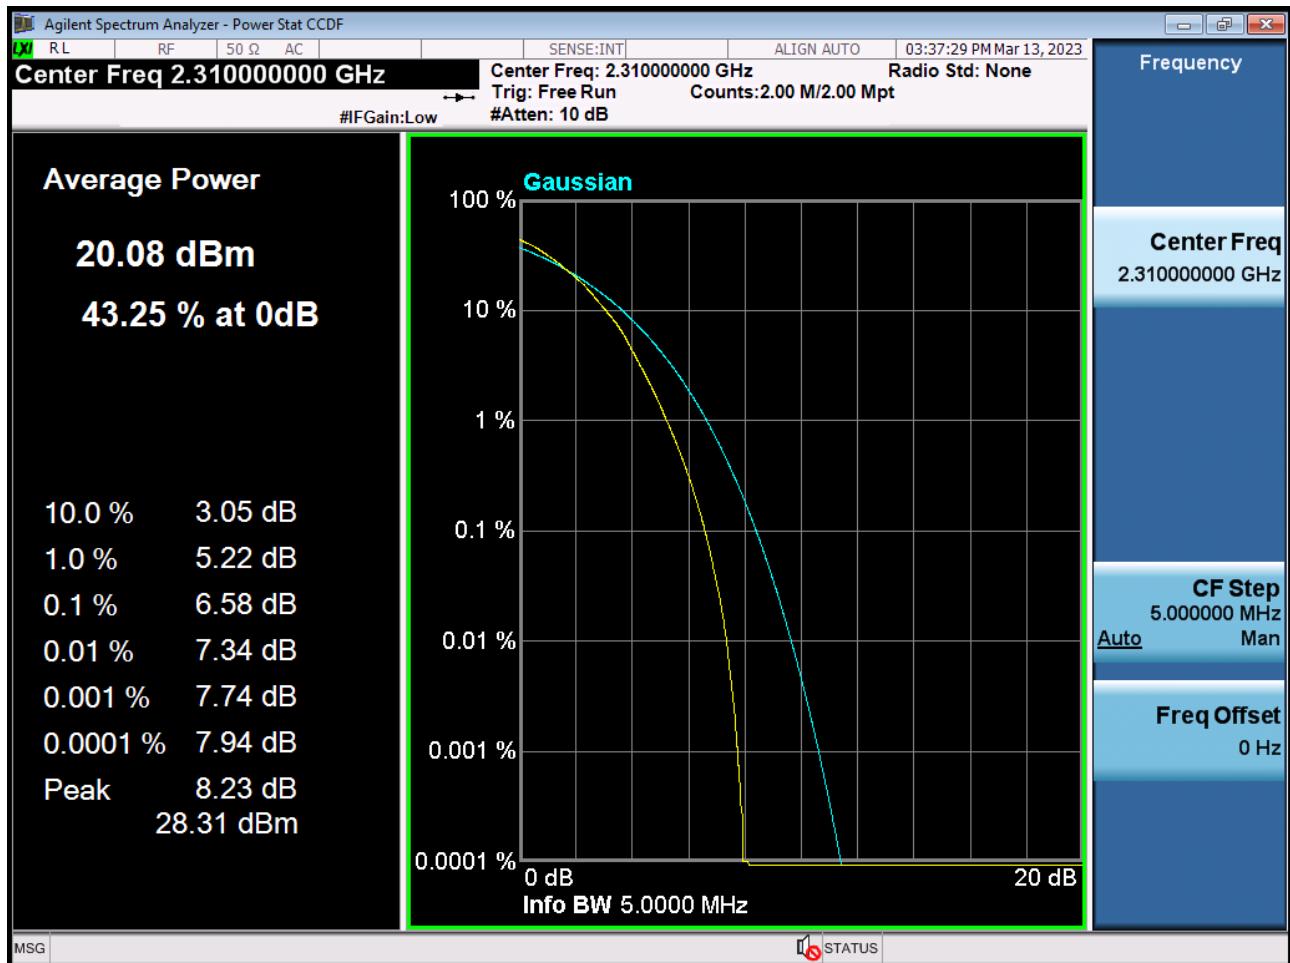


BAND 30. PAR Plot (5M BW_Ch.27710_256QAM_RB25_0)

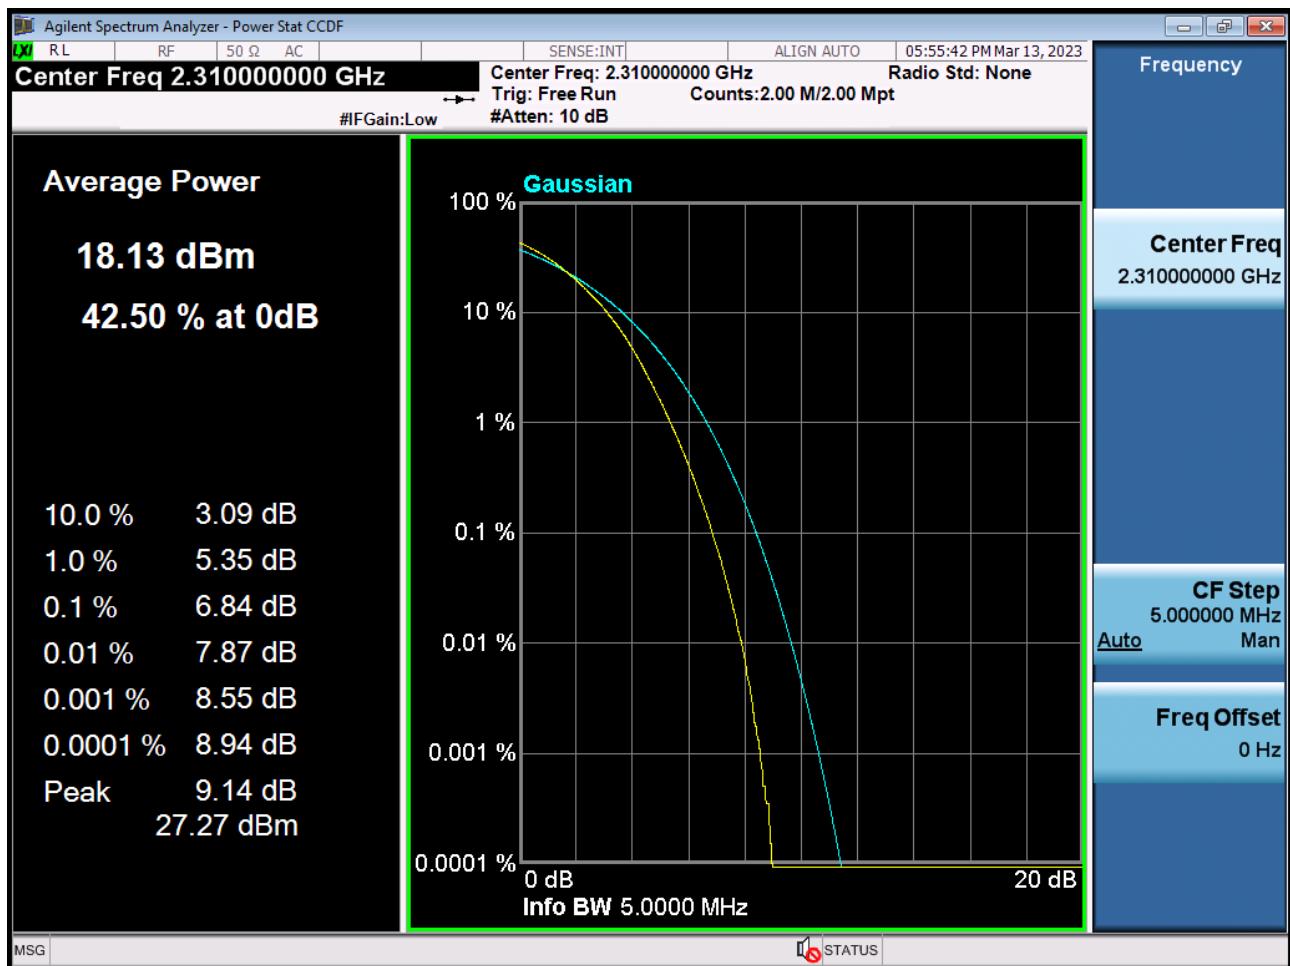


BAND 30. PAR Plot (10M BW_Ch.27710_QPSK_RB50_0)

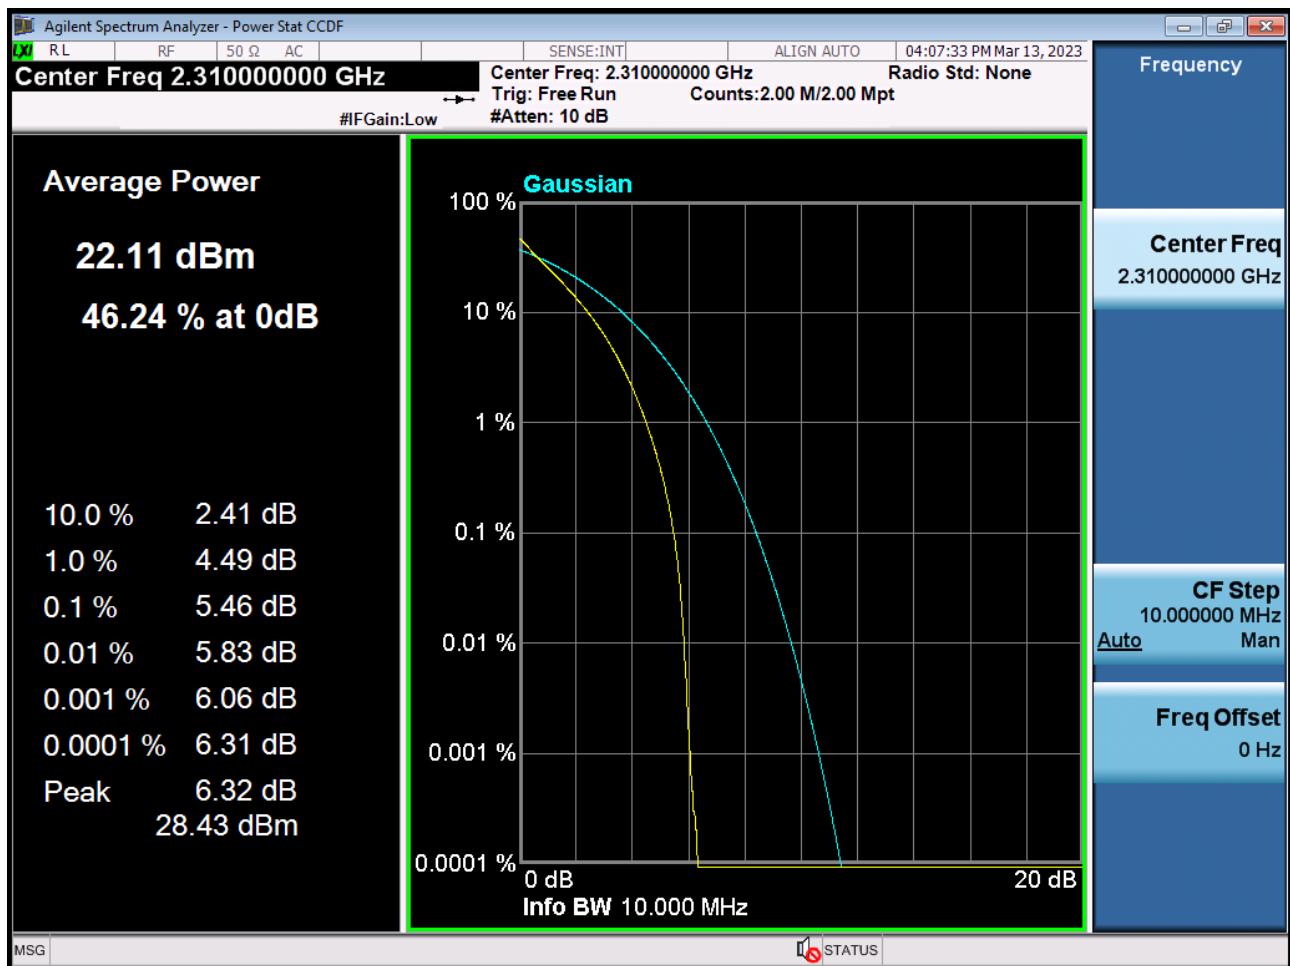


BAND 30. PAR Plot (10M BW_Ch.27710_16QAM_RB50_0)

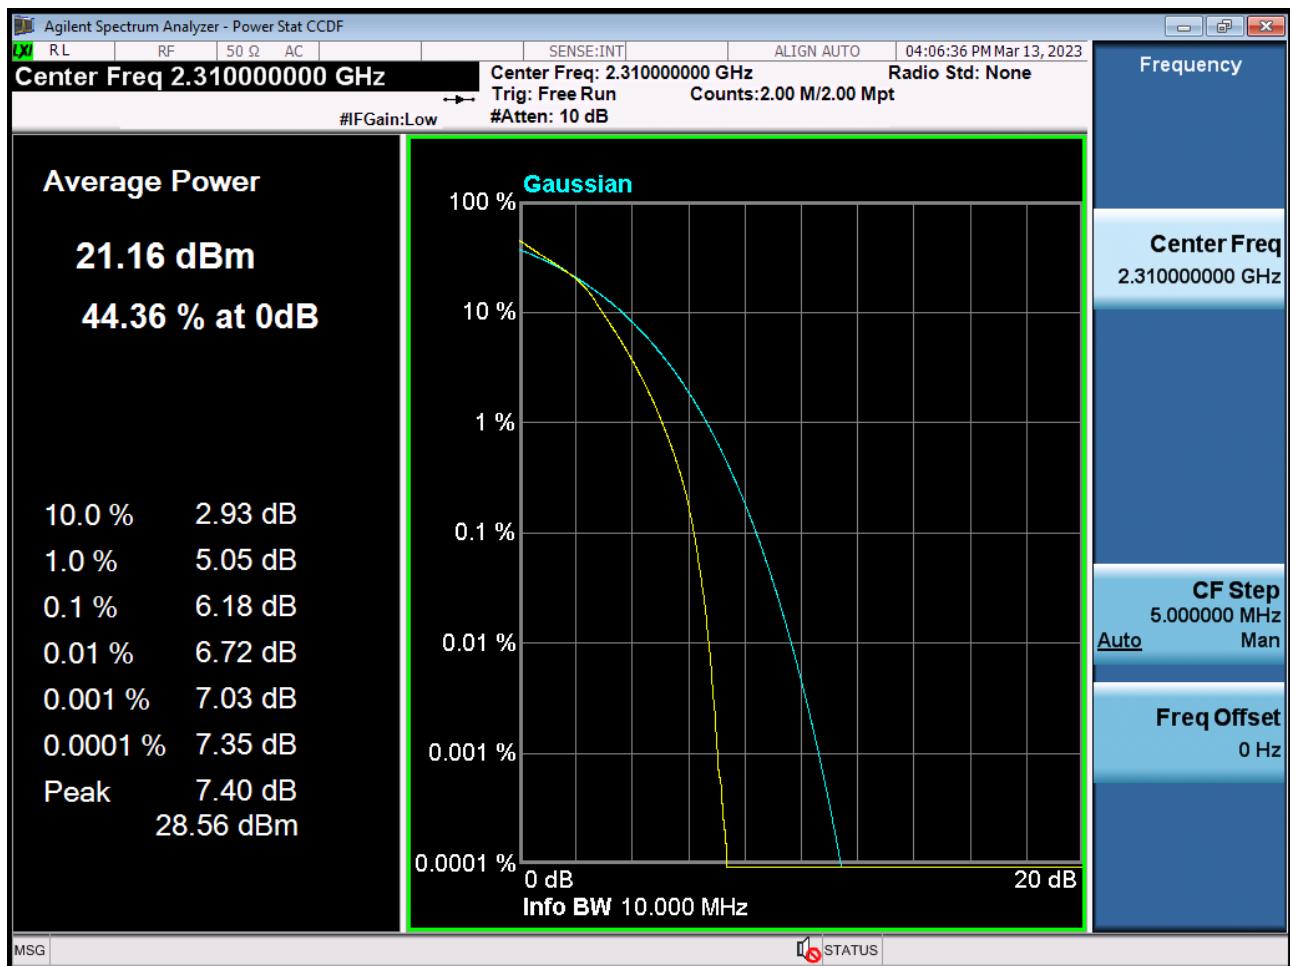


BAND 30. PAR Plot (10M BW_Ch.27710_64QAM_RB50_0)

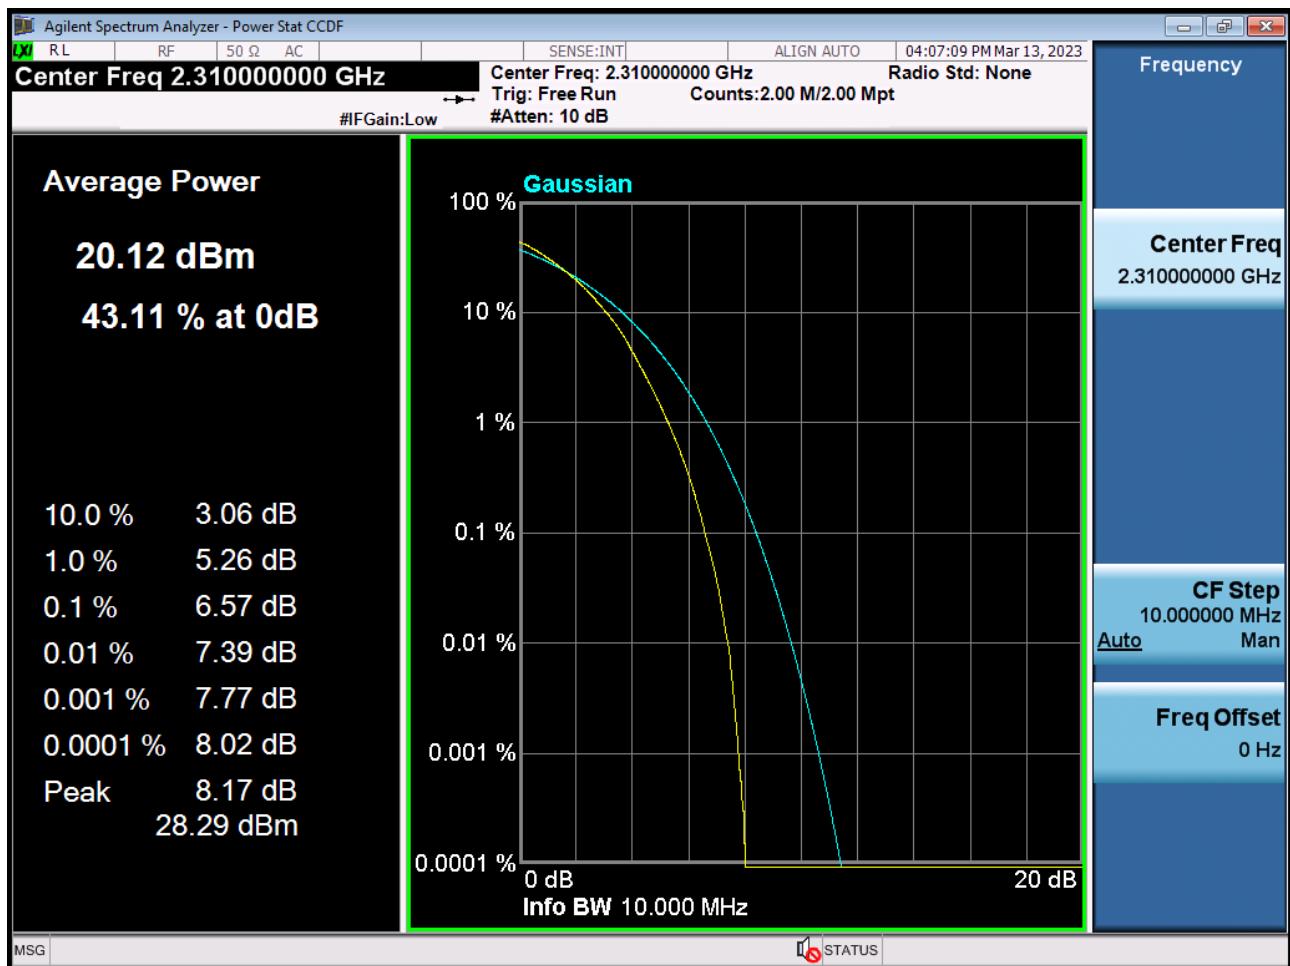


BAND 30. PAR Plot (10M BW_Ch.27710_256QAM_RB50_0)

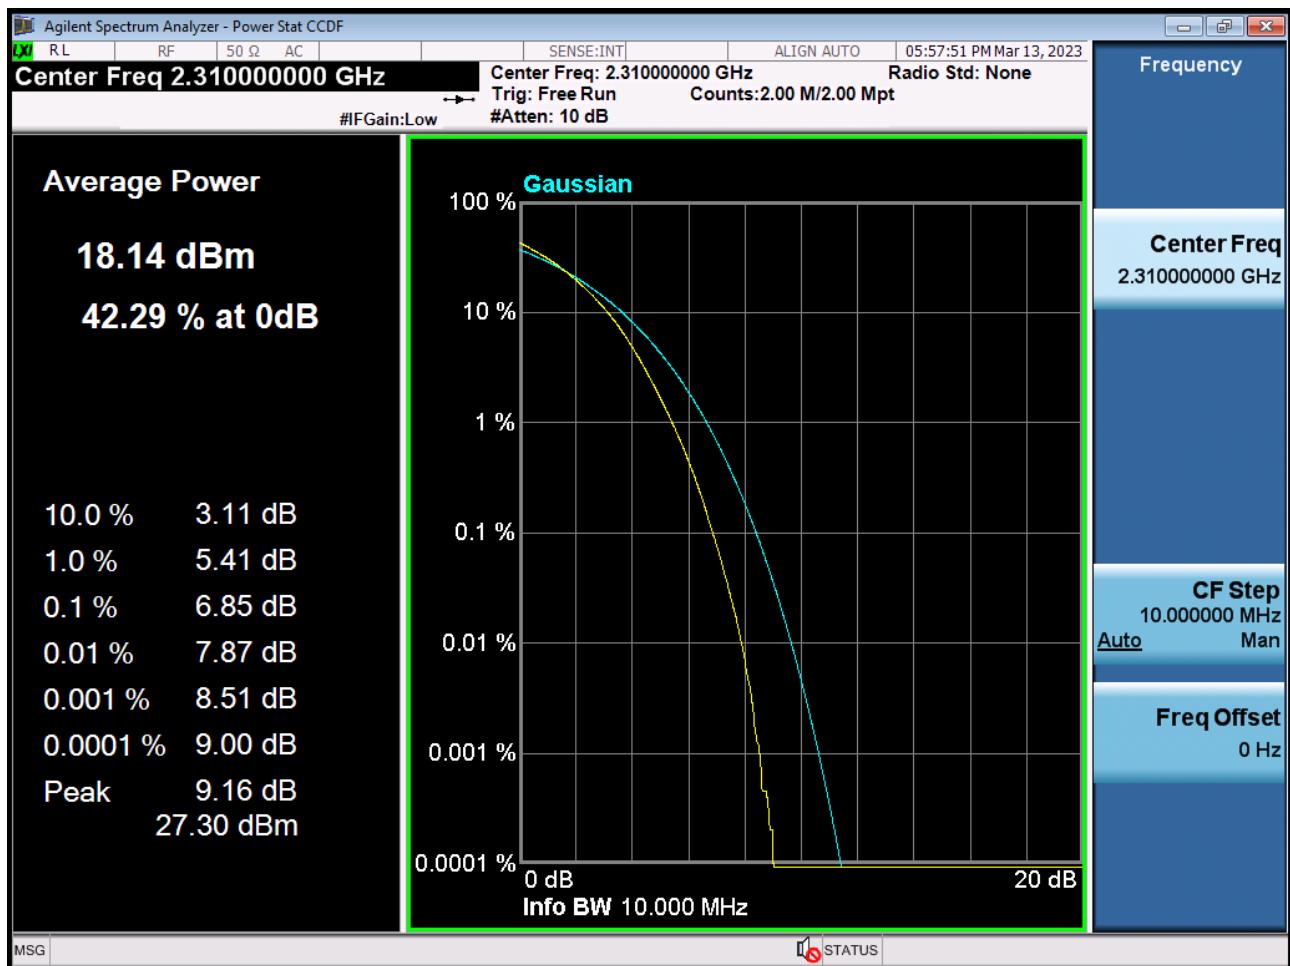

BAND 30. 5M_BandEdge(2280MHz-2288MHz)_Low_2307.5MHz_QPSK_1RB

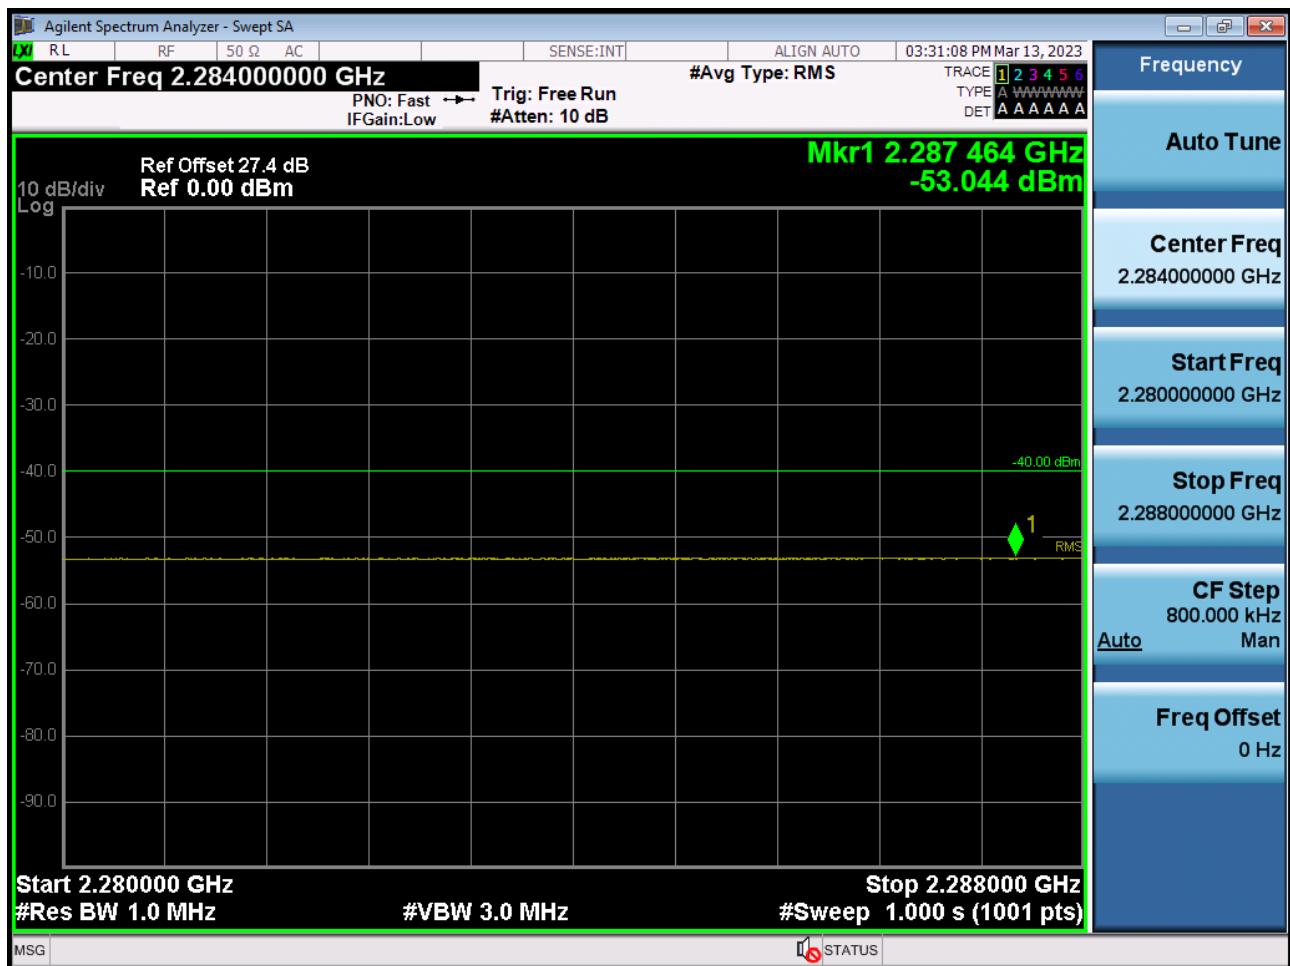

BAND 30. 5M_BandEdge(2280MHz-2288MHz)_Low_2307.5MHz_QPSK_FullRB

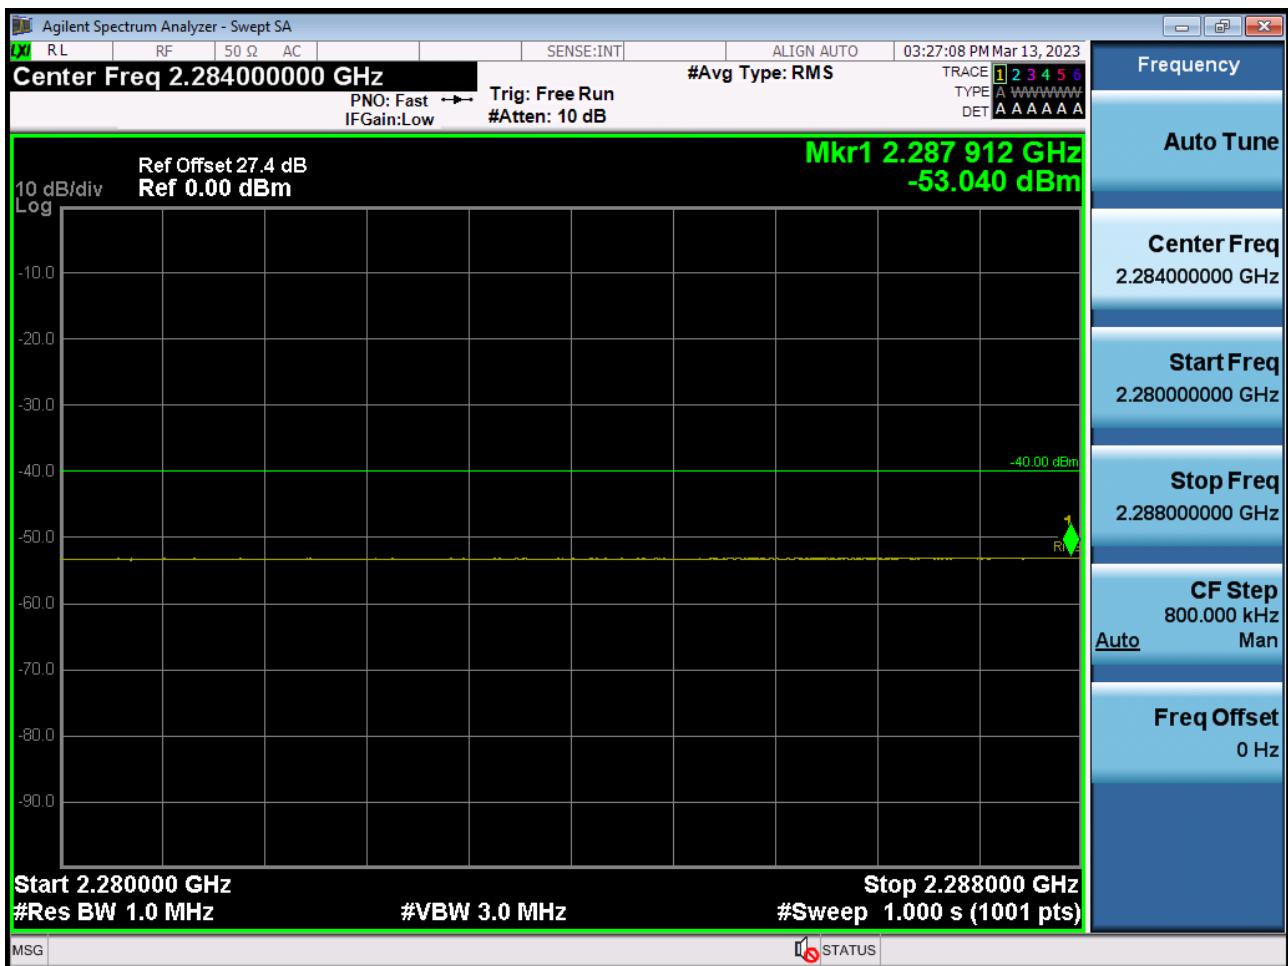


BAND 30. 5M_BandEdge(2280MHz-2288MHz)_Mid_2310MHz_QPSK_1RB




BAND 30. 5M_BandEdge(2280MHz-2288MHz)_Mid_2310MHz_QPSK_FullRB




BAND 30. 5M_BandEdge(2280MHz-2288MHz)_High_2312.5MHz_QPSK_1RB

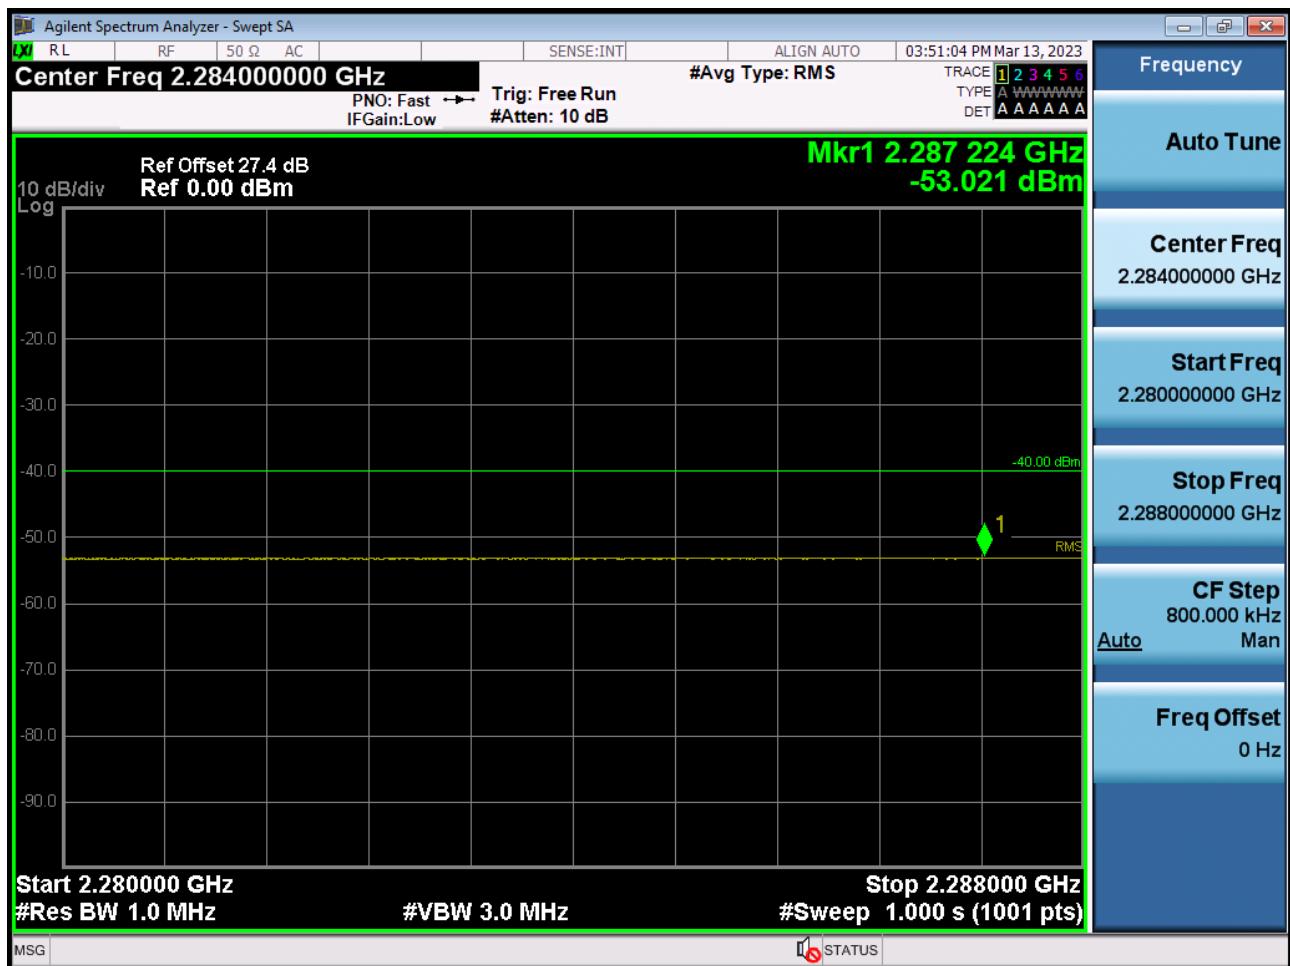

BAND 30. 5M_BandEdge(2280MHz-2288MHz)_High_2312.5MHz_QPSK_FullRB

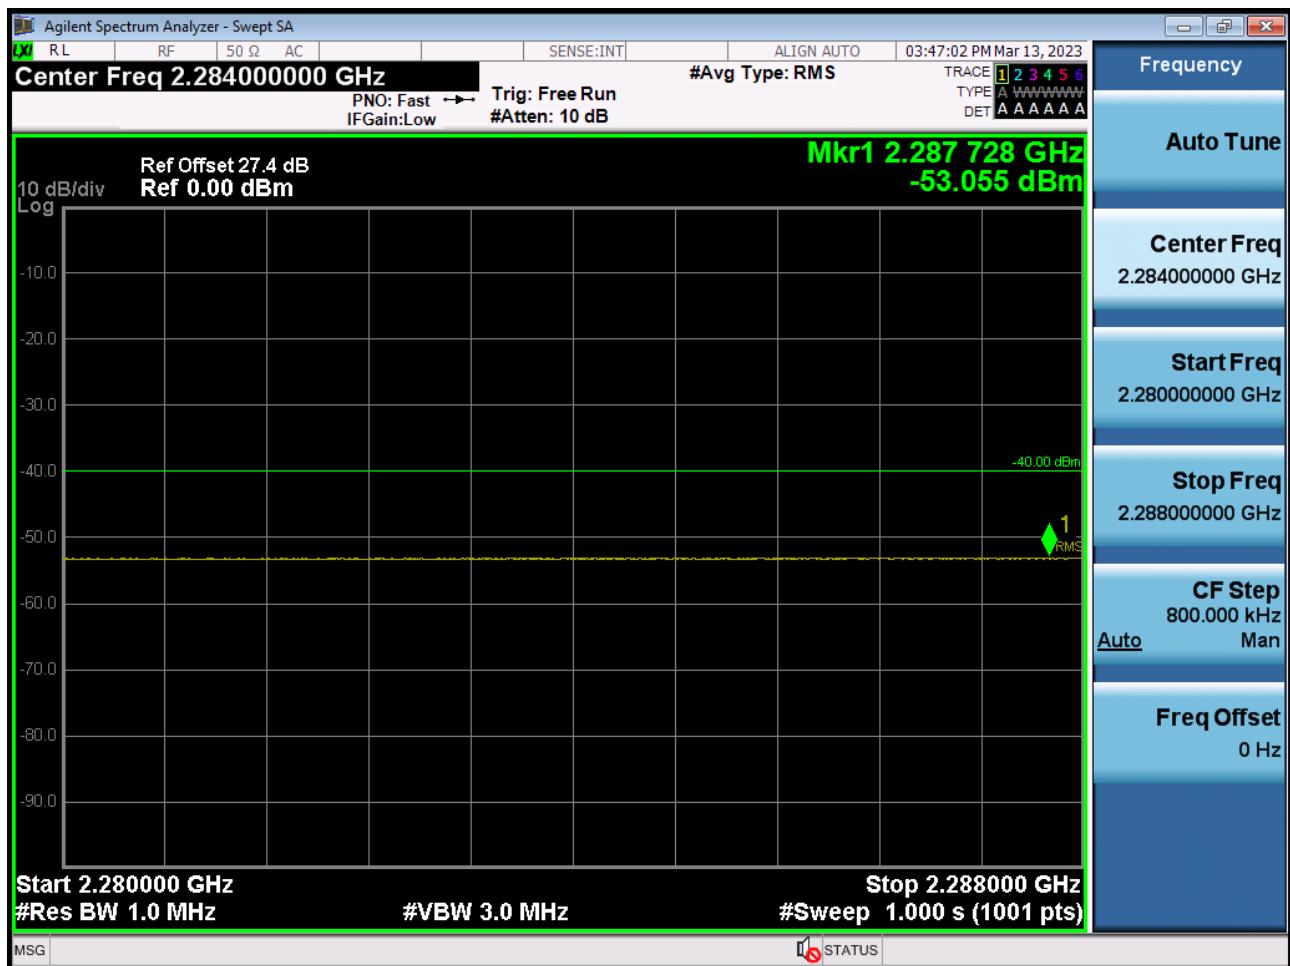


BAND 30. 5M_BandEdge(2288MHz-2292MHz)_Low_2307.5MHz_QPSK_1RB

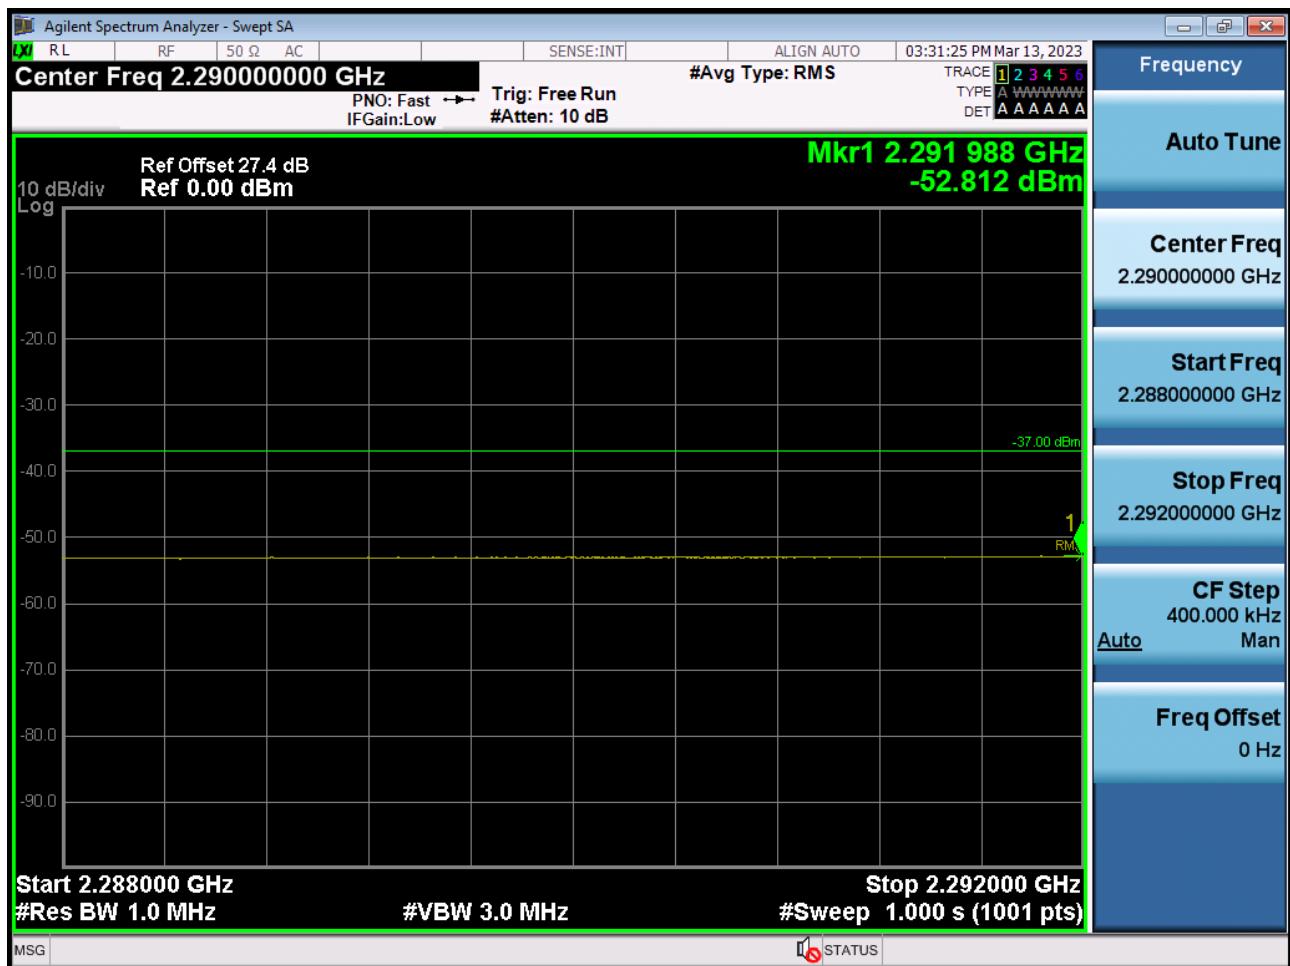


BAND 30. 5M_BandEdge(2288MHz-2292MHz)_Low_2307.5MHz_QPSK_FullRB




BAND 30. 5M_BandEdge(2288MHz-2292MHz)_Mid_2310MHz_QPSK_1RB

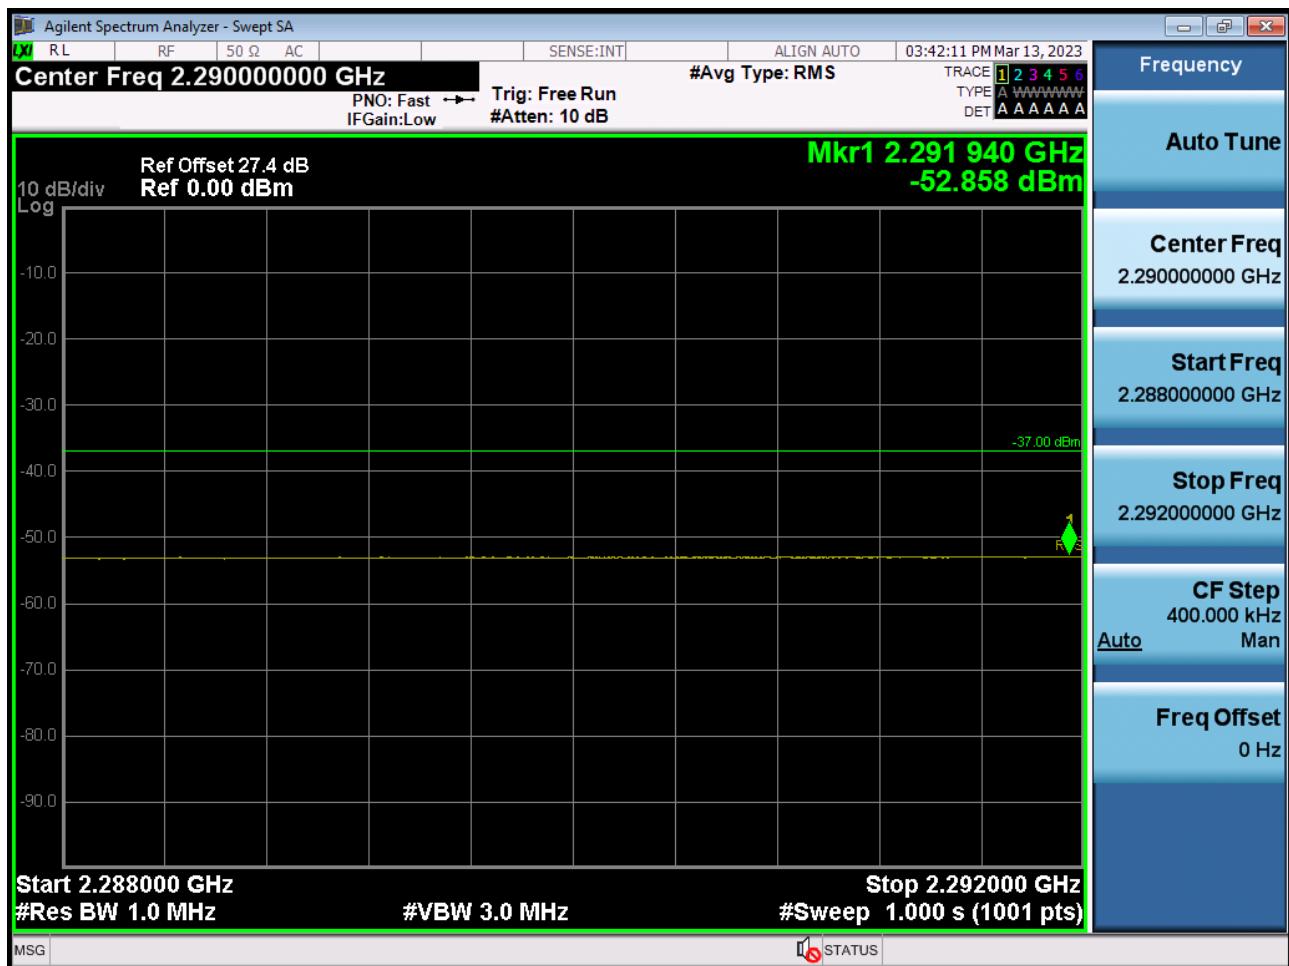


BAND 30. 5M_BandEdge(2288MHz-2292MHz)_Mid_2310MHz_QPSK_FullRB

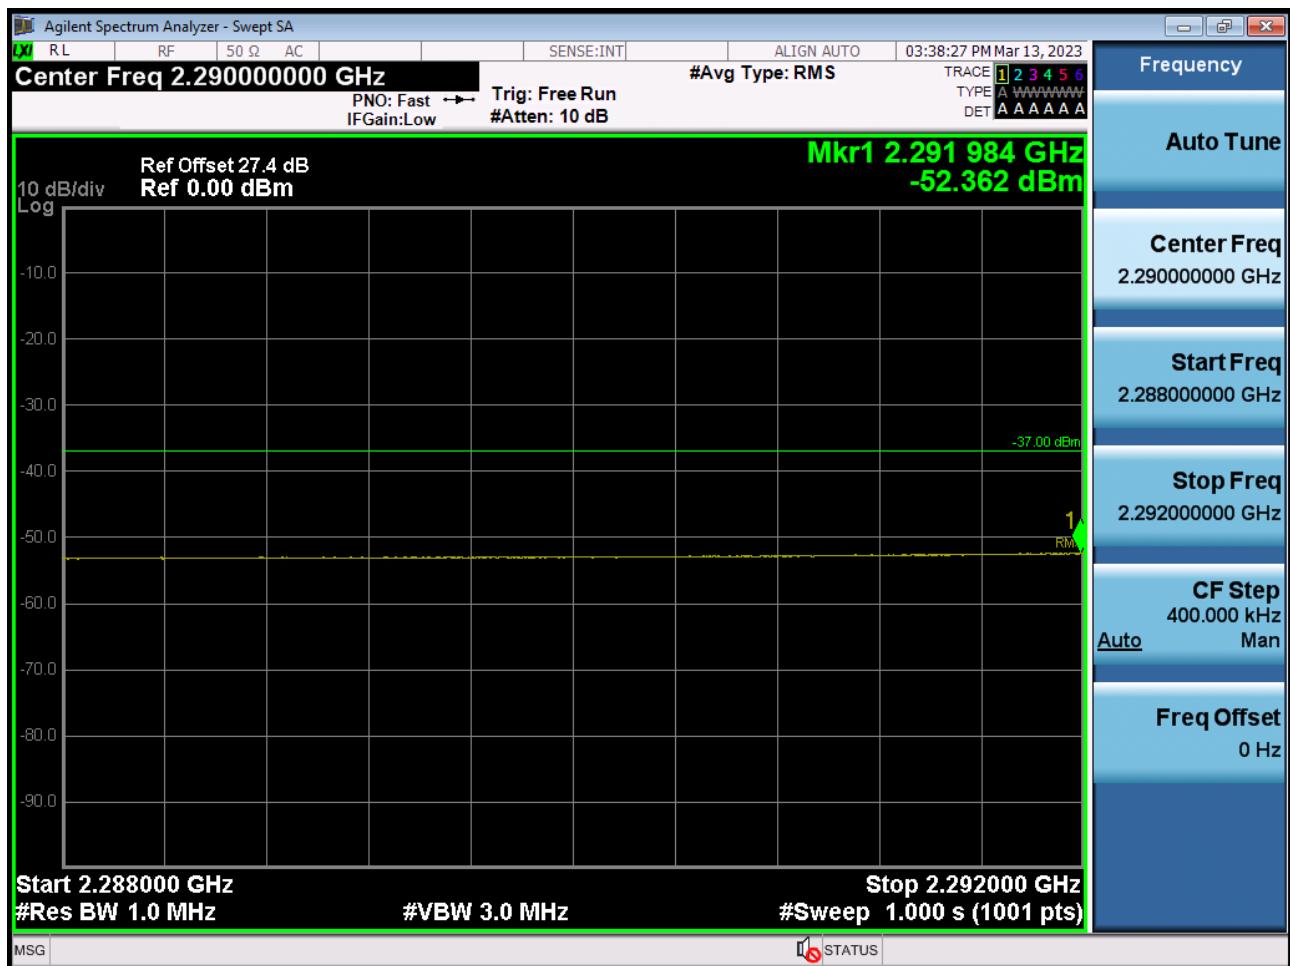

BAND 30. 5M_BandEdge(2288MHz-2292MHz)_High_2312.5MHz_QPSK_1RB

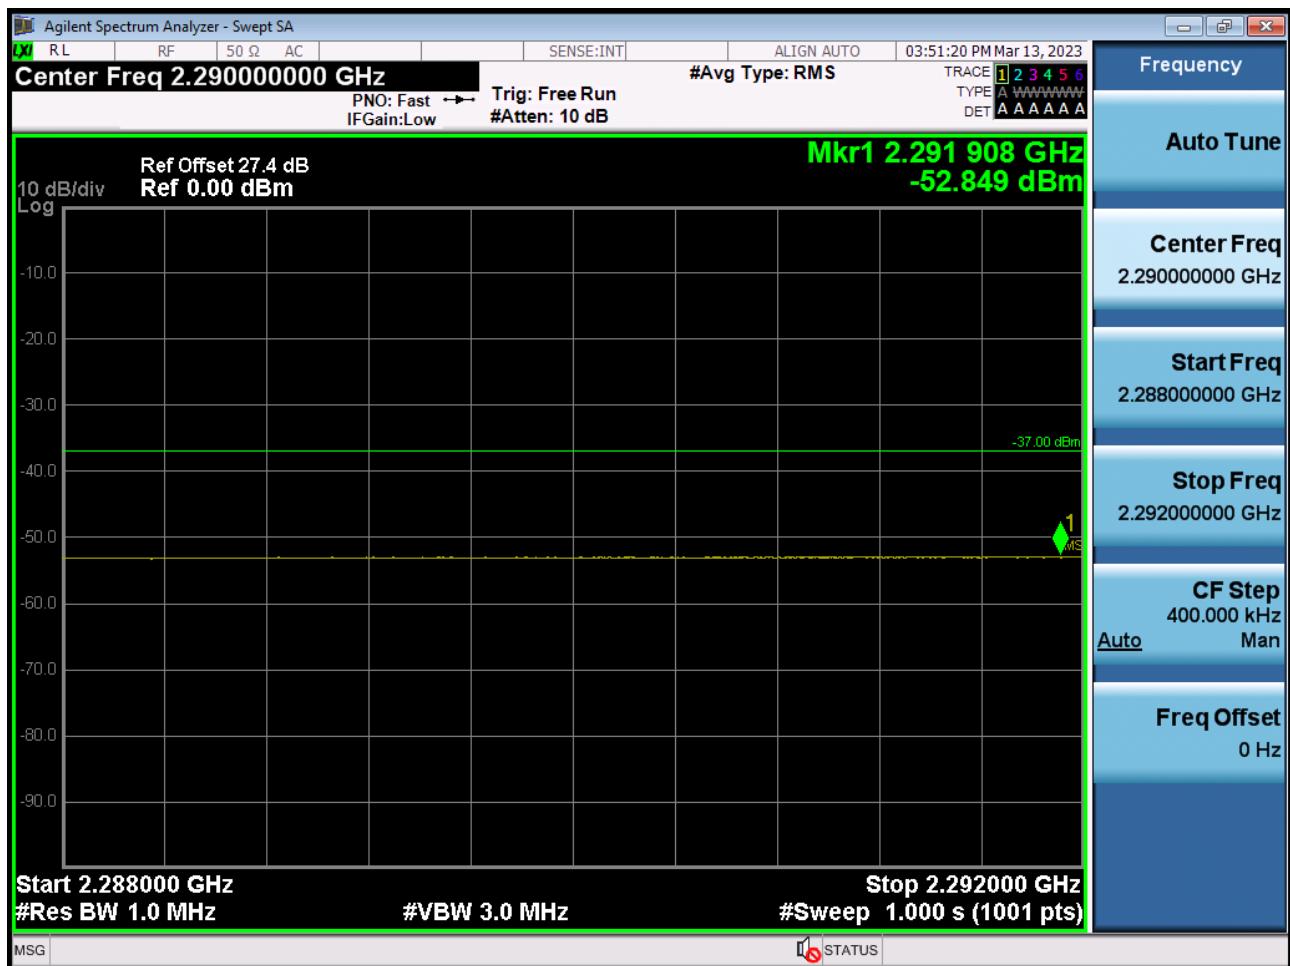


BAND 30. 5M_BandEdge(2288MHz-2292MHz)_High_2312.5MHz_QPSK_FullRB

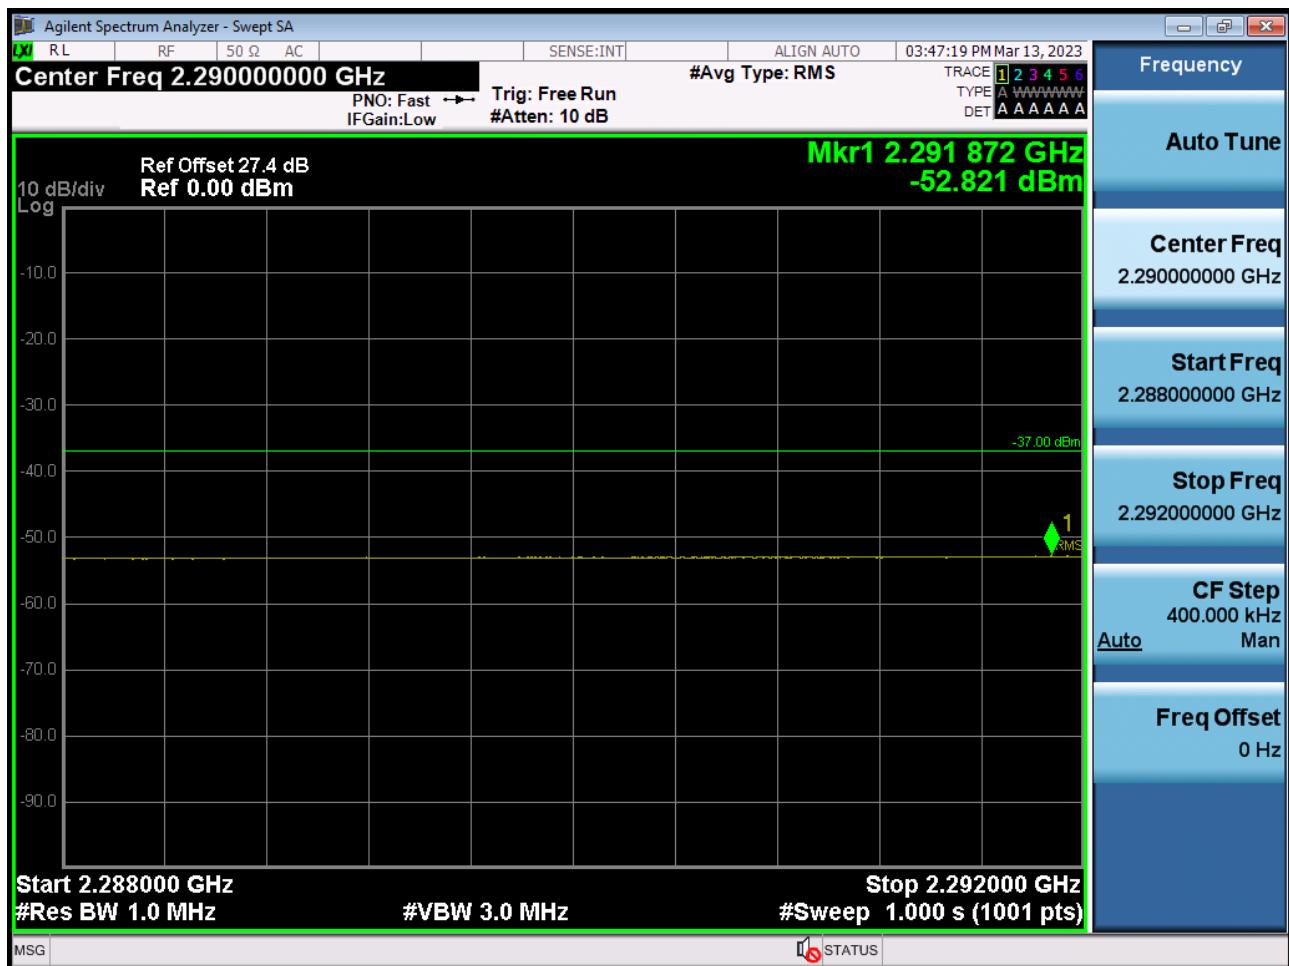


BAND 30. 5M_BandEdge(2292MHz-2296MHz)_Low_2307.5MHz_QPSK_1RB



BAND 30. 5M_BandEdge(2292MHz-2296MHz)_Low_2307.5MHz_QPSK_FullRB

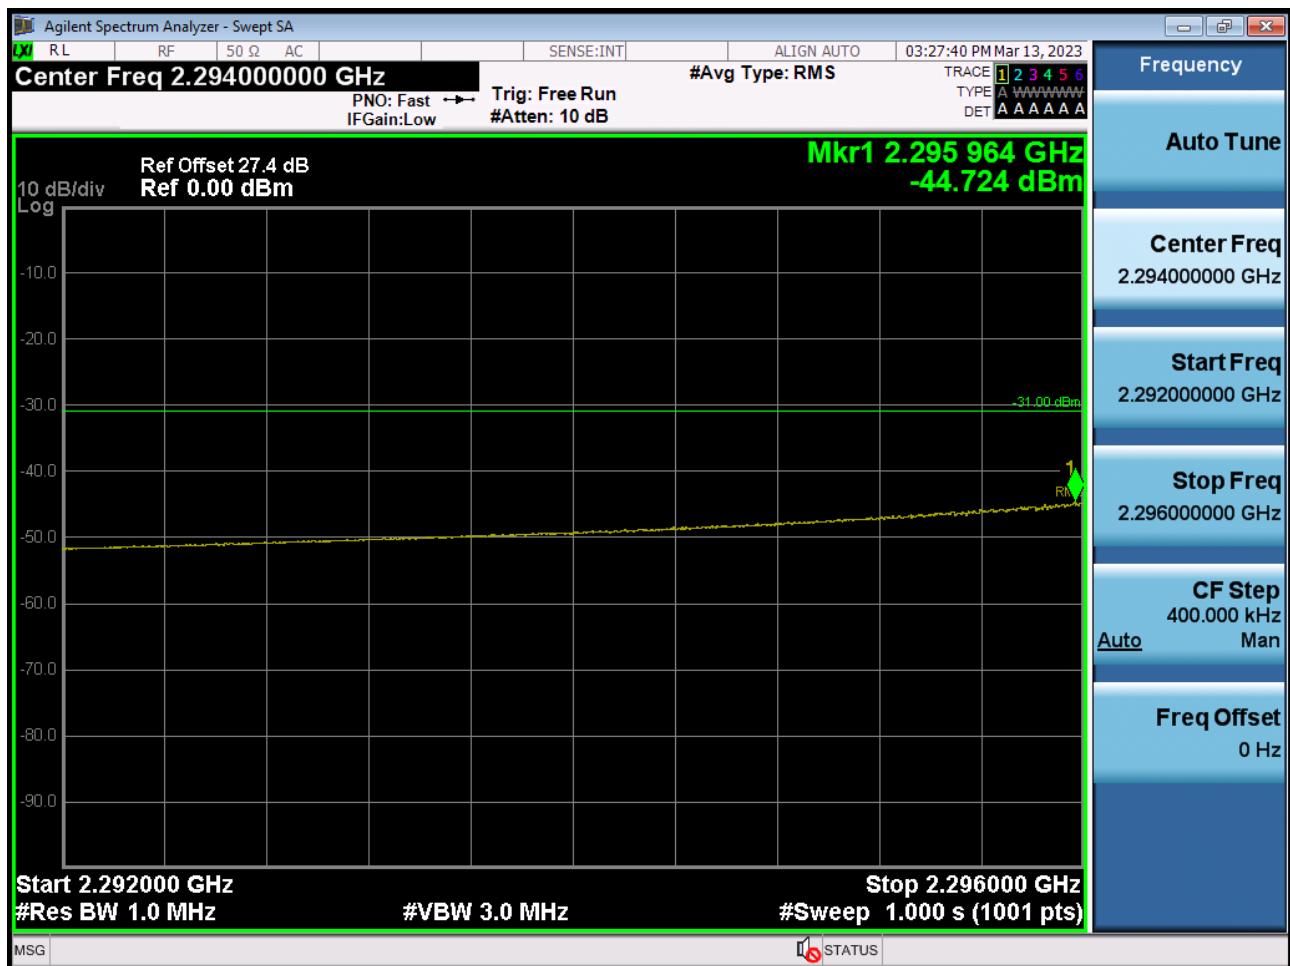

BAND 30. 5M_BandEdge(2292MHz-2296MHz)_Mid_2310MHz_QPSK_1RB

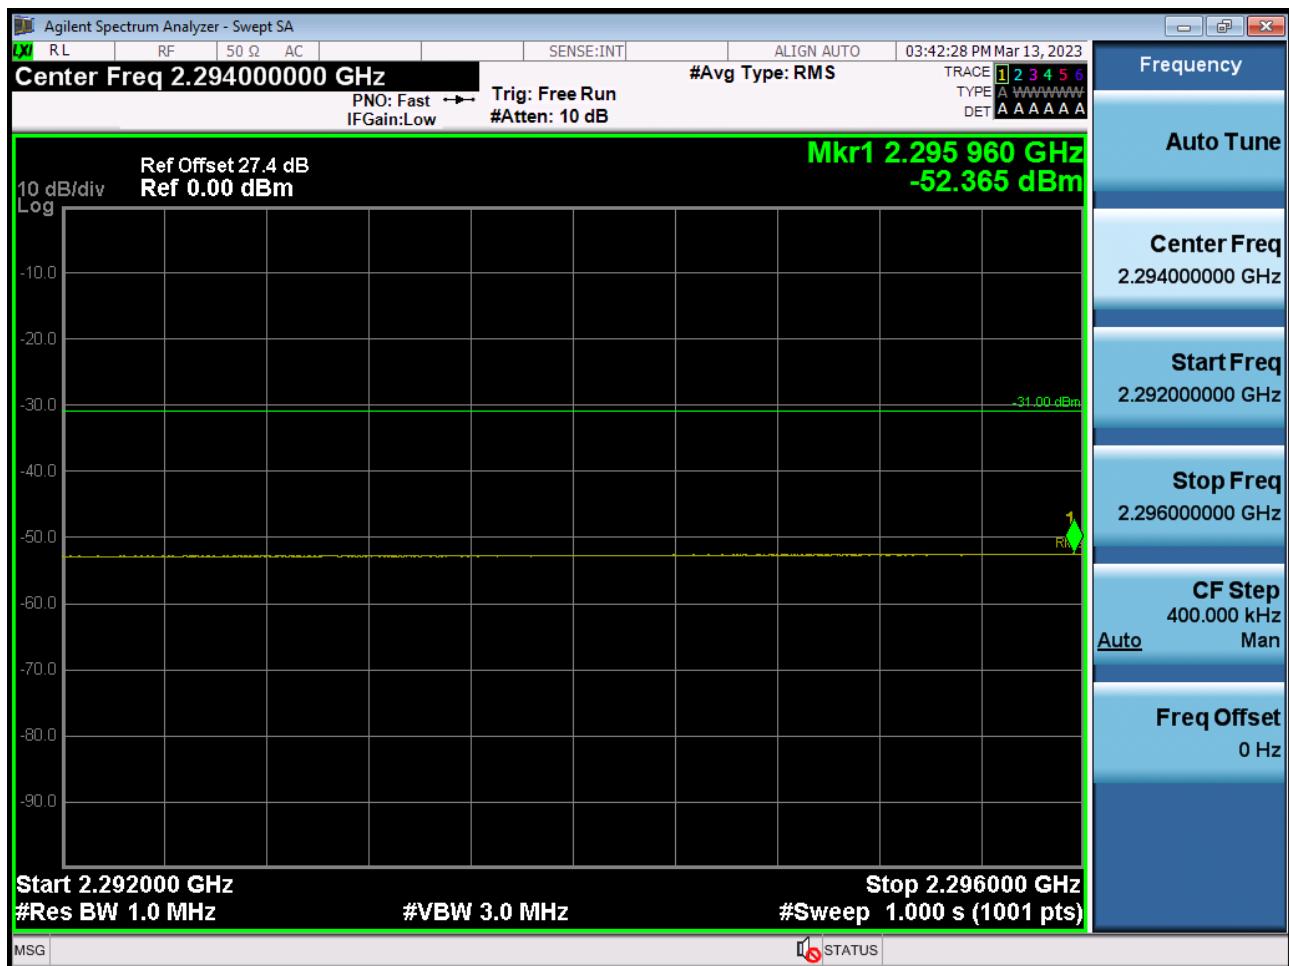

BAND 30. 5M_BandEdge(2292MHz-2296MHz)_Mid_2310MHz_QPSK_FullRB



BAND 30. 5M_BandEdge(2292MHz-2296MHz)_High_2312.5MHz_QPSK_1RB




BAND 30. 5M_BandEdge(2292MHz-2296MHz)_High_2312.5MHz_QPSK_FullRB




BAND 30. 5M_BandEdge(2296MHz-2300MHz)_Low_2307.5MHz_QPSK_1RB



BAND 30. 5M_BandEdge(2296MHz-2300MHz)_Low_2307.5MHz_QPSK_FullRB

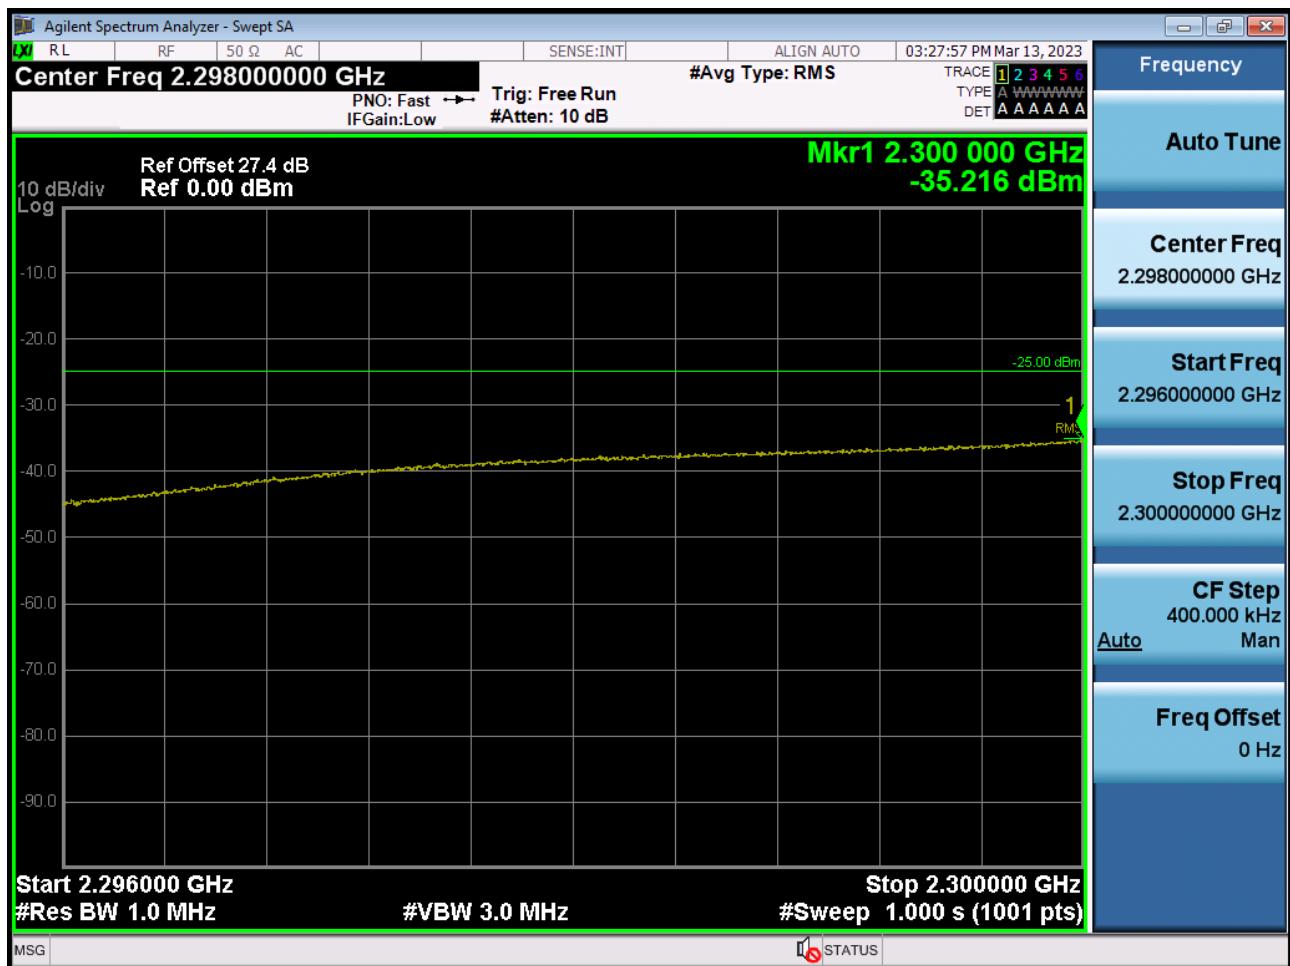

BAND 30. 5M_BandEdge(2296MHz-2300MHz)_Mid_2310MHz_QPSK_1RB

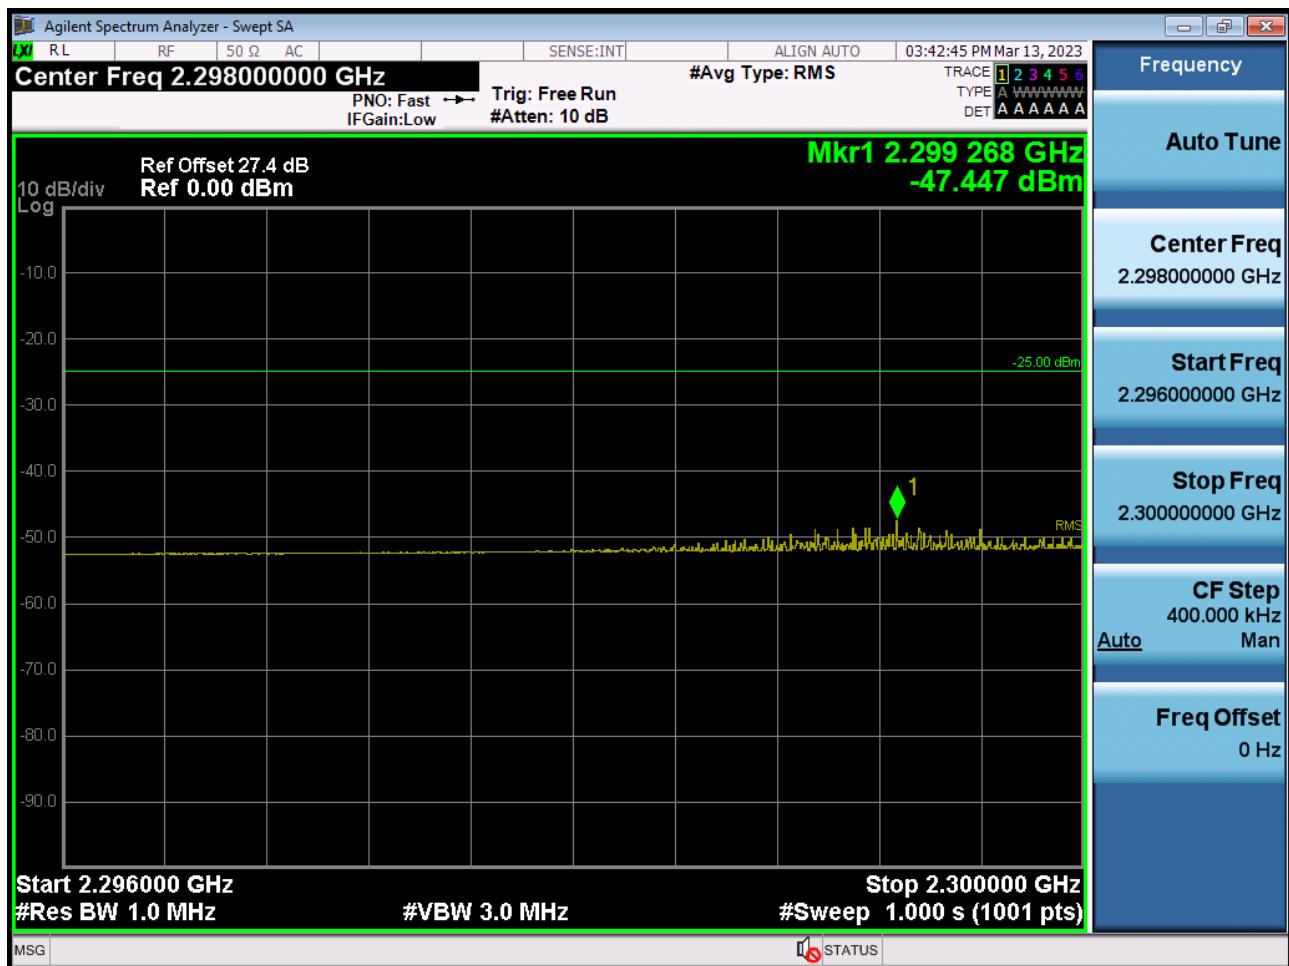

BAND 30. 5M_BandEdge(2296MHz-2300MHz)_Mid_2310MHz_QPSK_FullRB




BAND 30. 5M_BandEdge(2296MHz-2300MHz)_High_2312.5MHz_QPSK_1RB



BAND 30. 5M_BandEdge(2296MHz-2300MHz)_High_2312.5MHz_QPSK_FullRB




BAND 30. 5M_BandEdge(2300MHz-2304MHz)_Low_2307.5MHz_QPSK_1RB

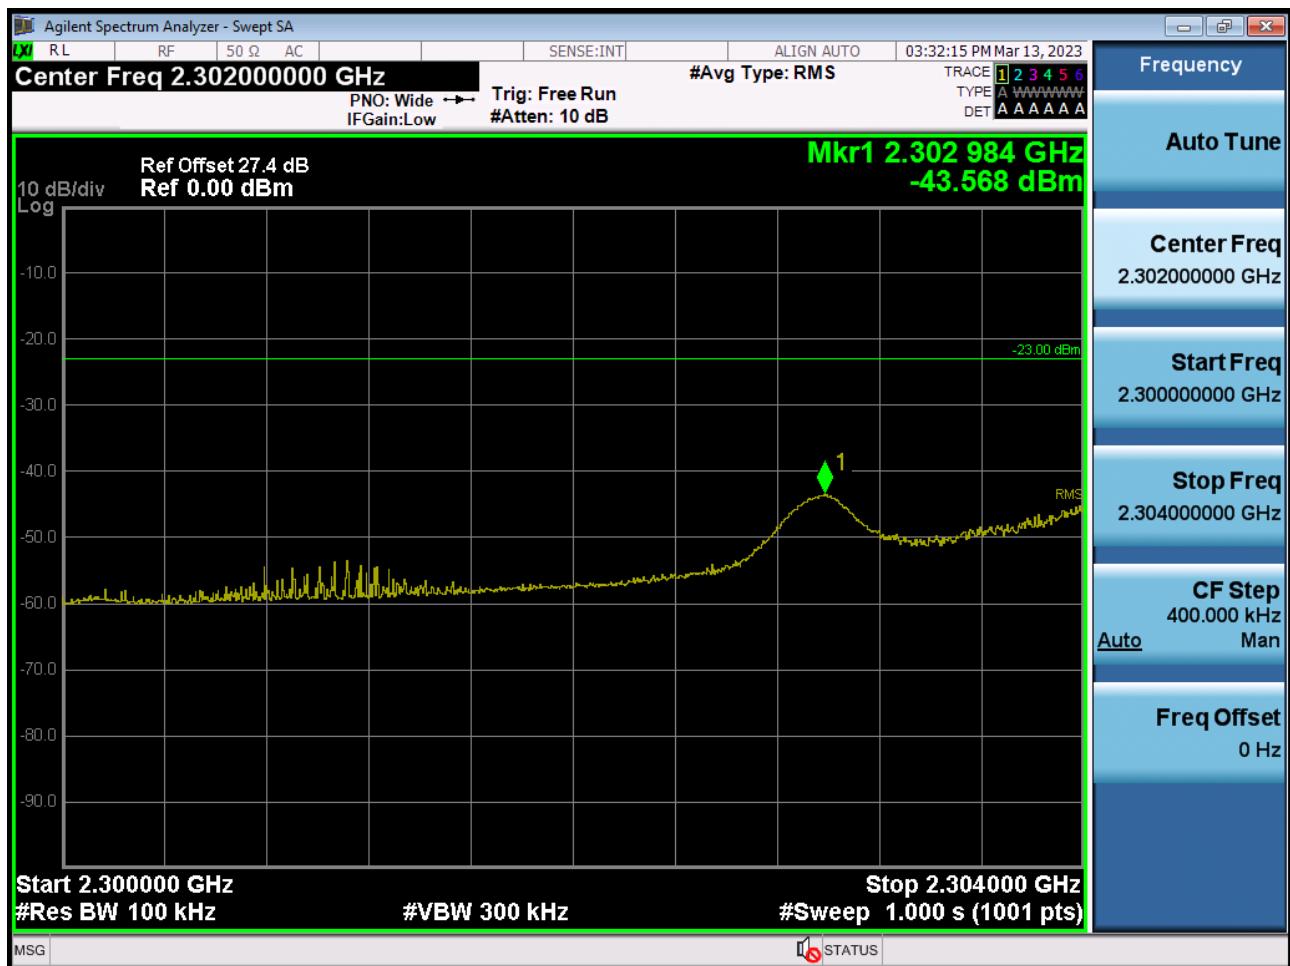

Note : We used a narrower RBW in order to increase accuracy.

Calculation = Reading Value + 10 x log(1 MHz/100 kHz) dB = -43.568 dBm + 10 dB = -33.568 dBm


BAND 30. 5M_BandEdge(2300MHz-2304MHz)_Low_2307.5MHz_QPSK_FullRB

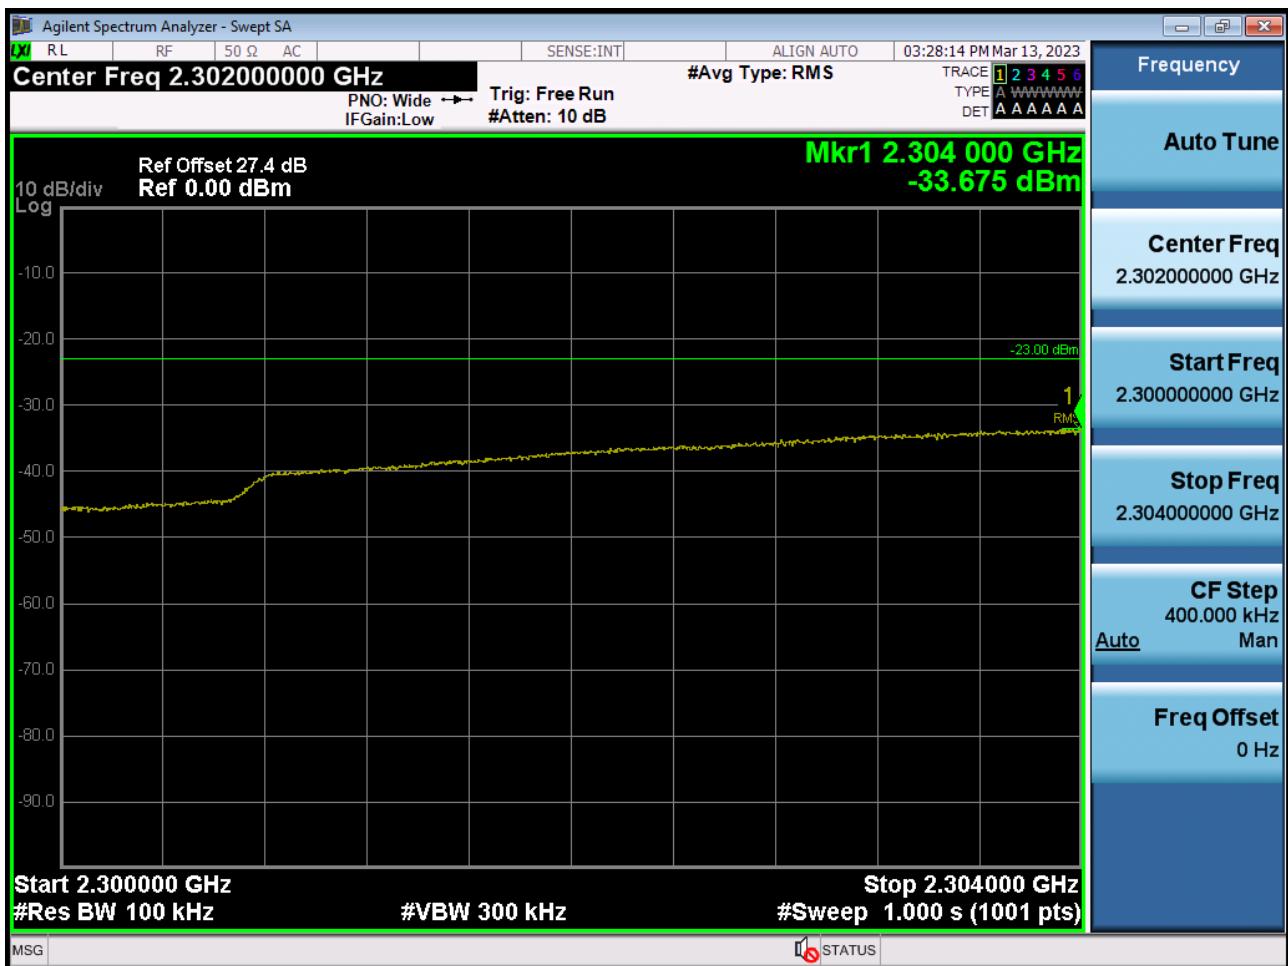

Note : We used a narrower RBW in order to increase accuracy.

Calculation = Reading Value + 10 x log(1 MHz/100 kHz) dB = -33.675 dBm + 10 dB = -23.678 dBm


BAND 30. 5M_BandEdge(2300MHz-2305MHz)_Mid_2310MHz_QPSK_1RB

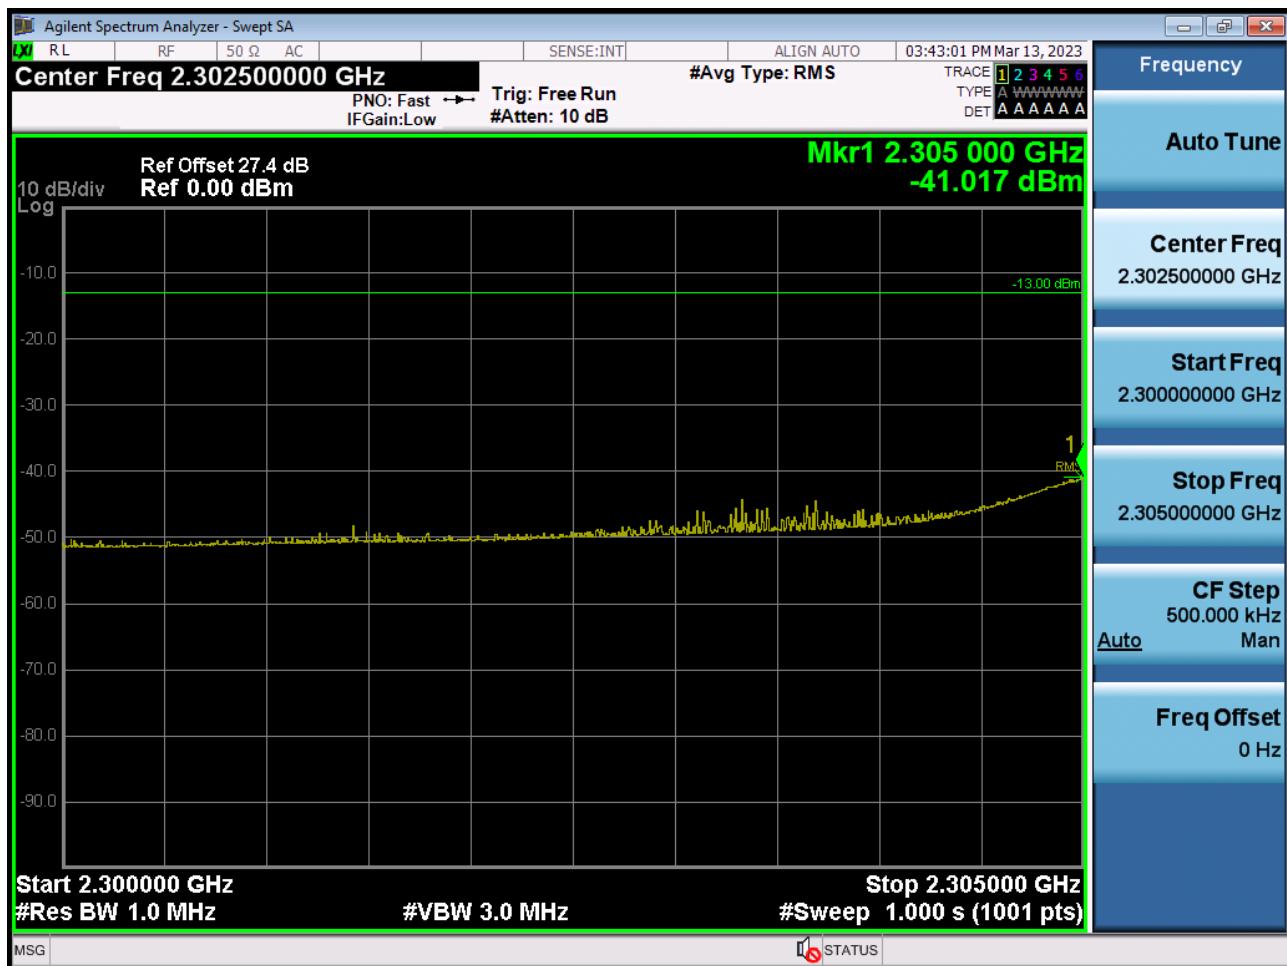


BAND 30. 5M_BandEdge(2300MHz-2305MHz)_Mid_2310MHz_QPSK_FullRB



BAND 30. 5M_BandEdge(2300MHz-2305MHz)_High_2312.5MHz_QPSK_1RB

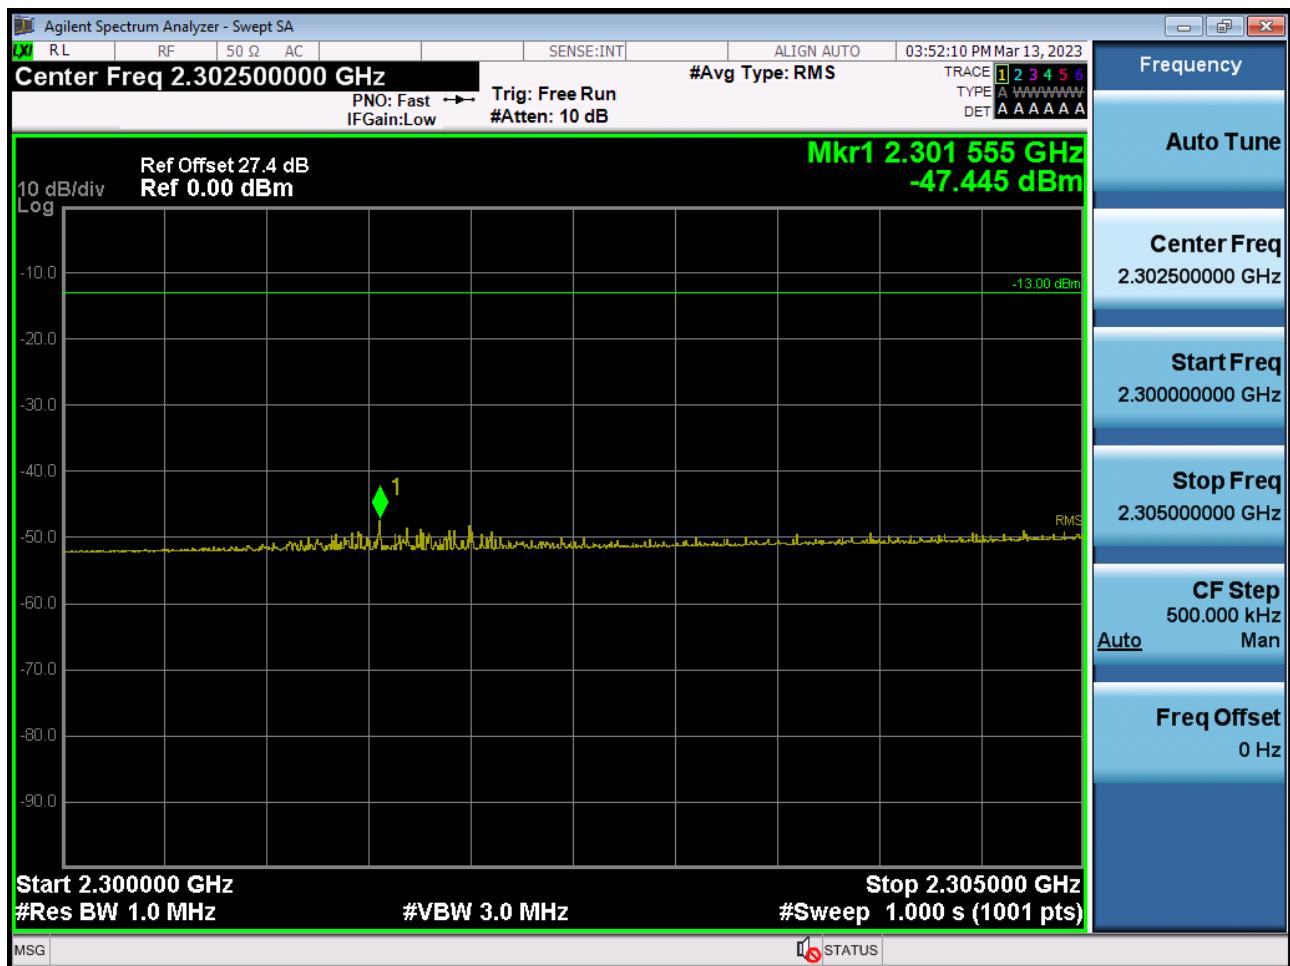


BAND 30. 5M_BandEdge(2300MHz-2305MHz)_High_2312.5MHz_QPSK_FullRB

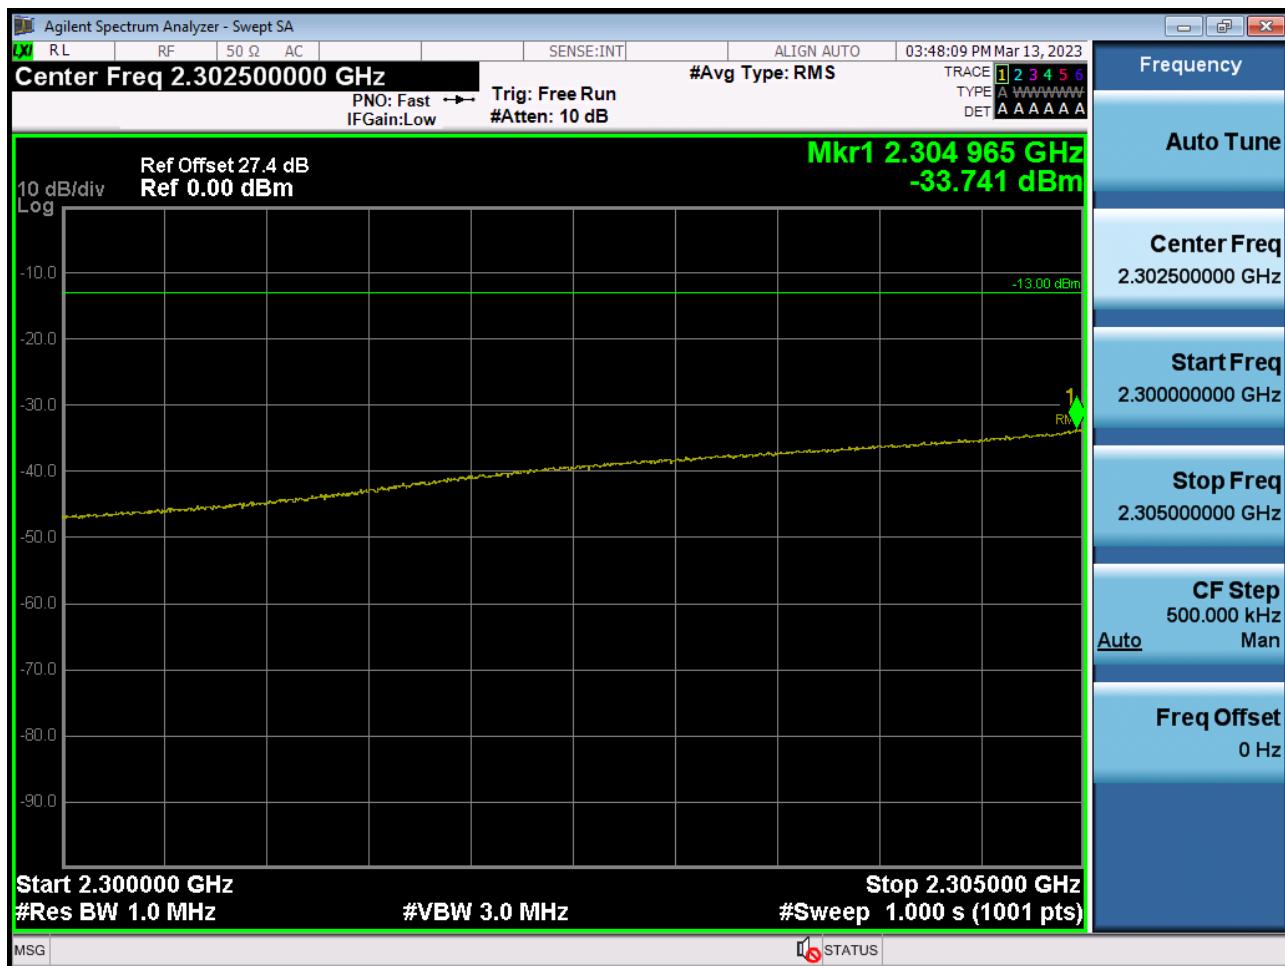


BAND 30. 5M_BandEdge(2304MHz-2305MHz)_Low_2307.5MHz_QPSK_1RB



BAND 30. 5M_BandEdge(2304MHz-2305MHz)_Low_2307.5MHz_QPSK_FullRB

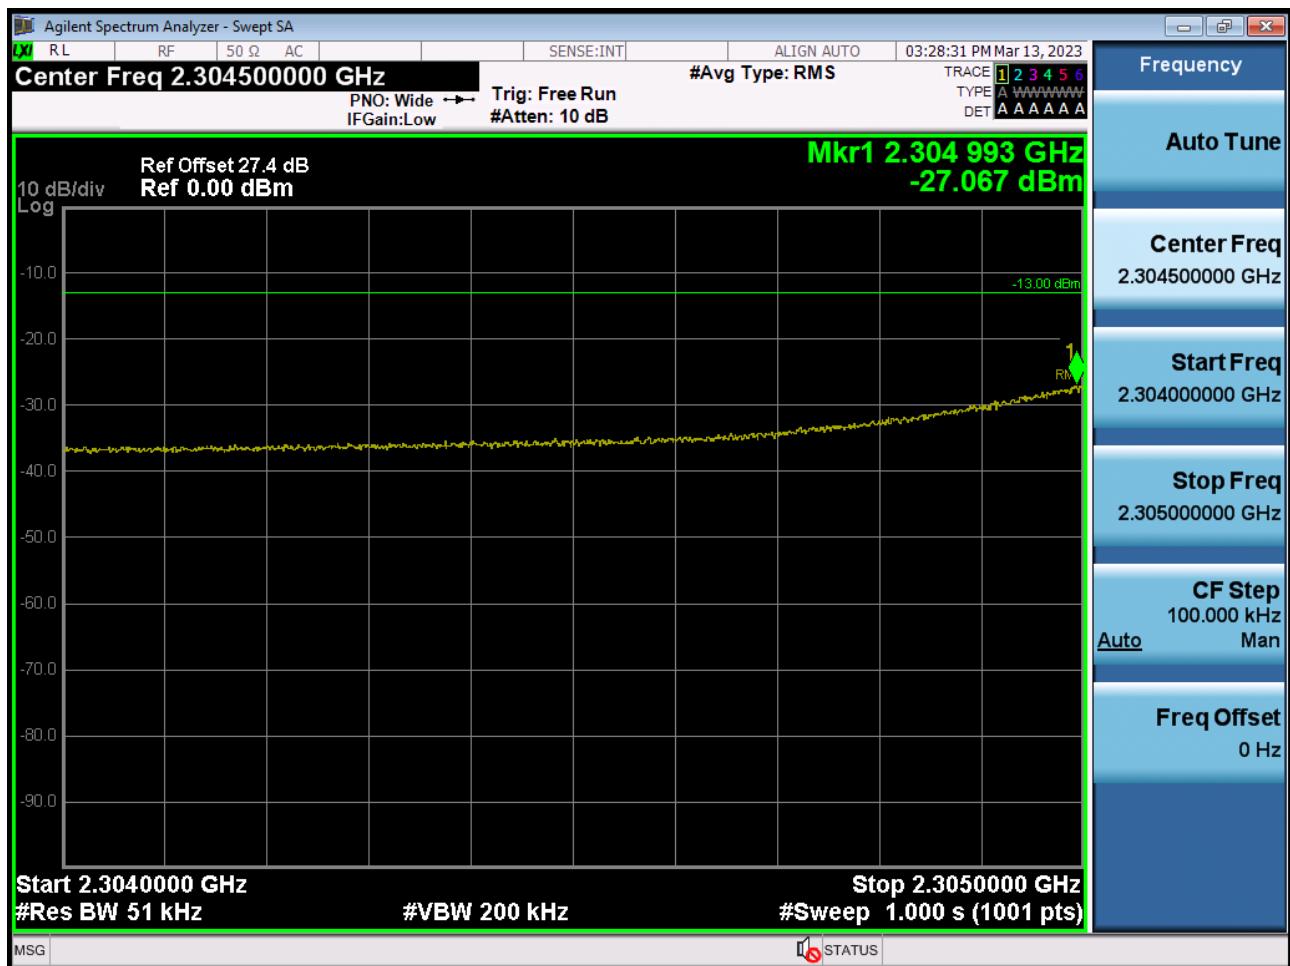


BAND 30. 5M_BandEdge(2315MHz-2320MHz)_Low_2307.5MHz_QPSK_1RB

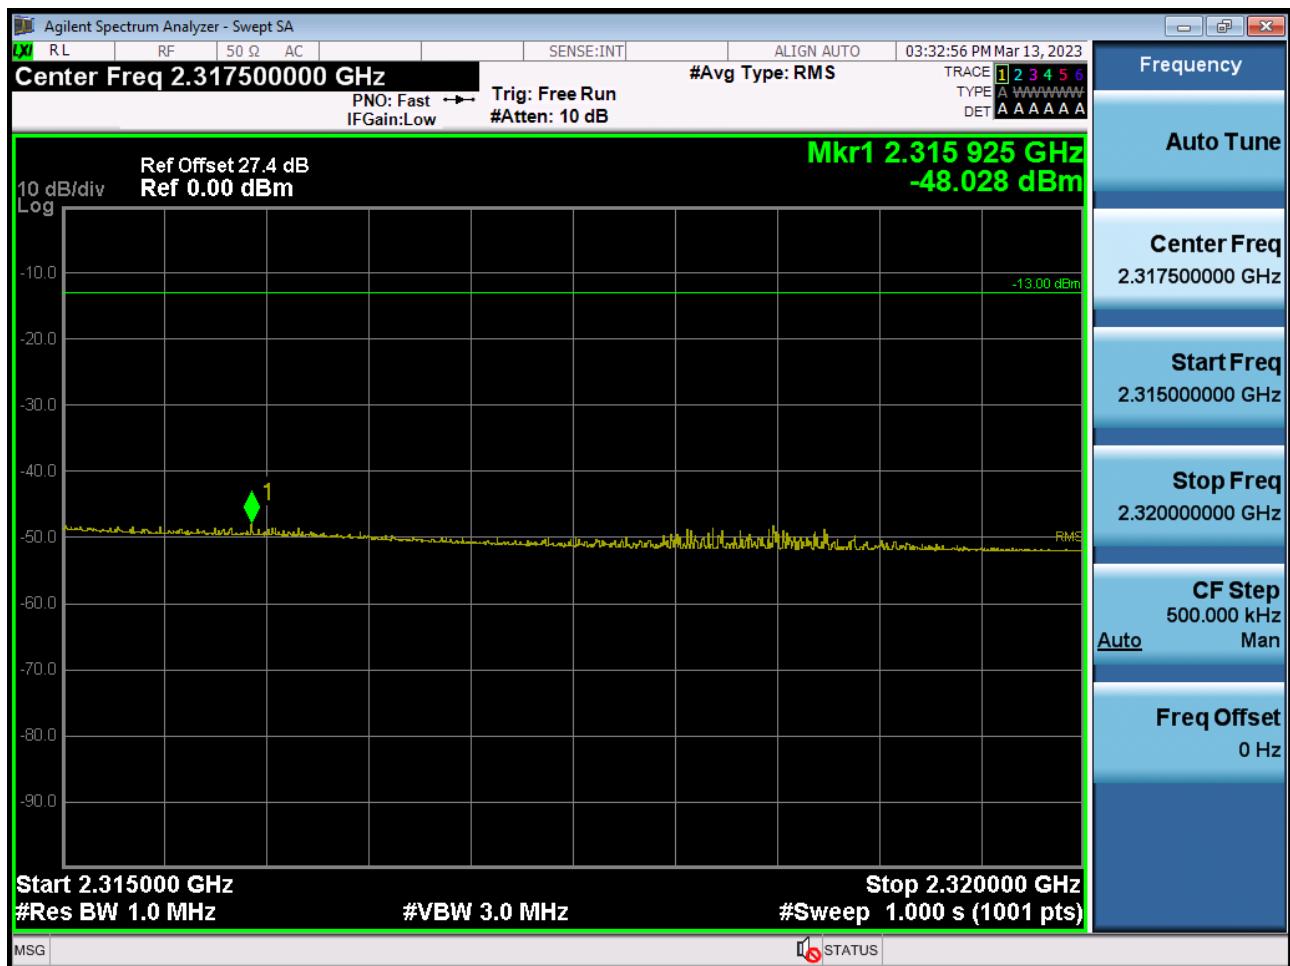

BAND 30. 5M_BandEdge(2315MHz-2320MHz)_Low_2307.5MHz_QPSK_FullRB




BAND 30. 5M_BandEdge(2315MHz-2320MHz)_Mid_2310MHz_QPSK_1RB

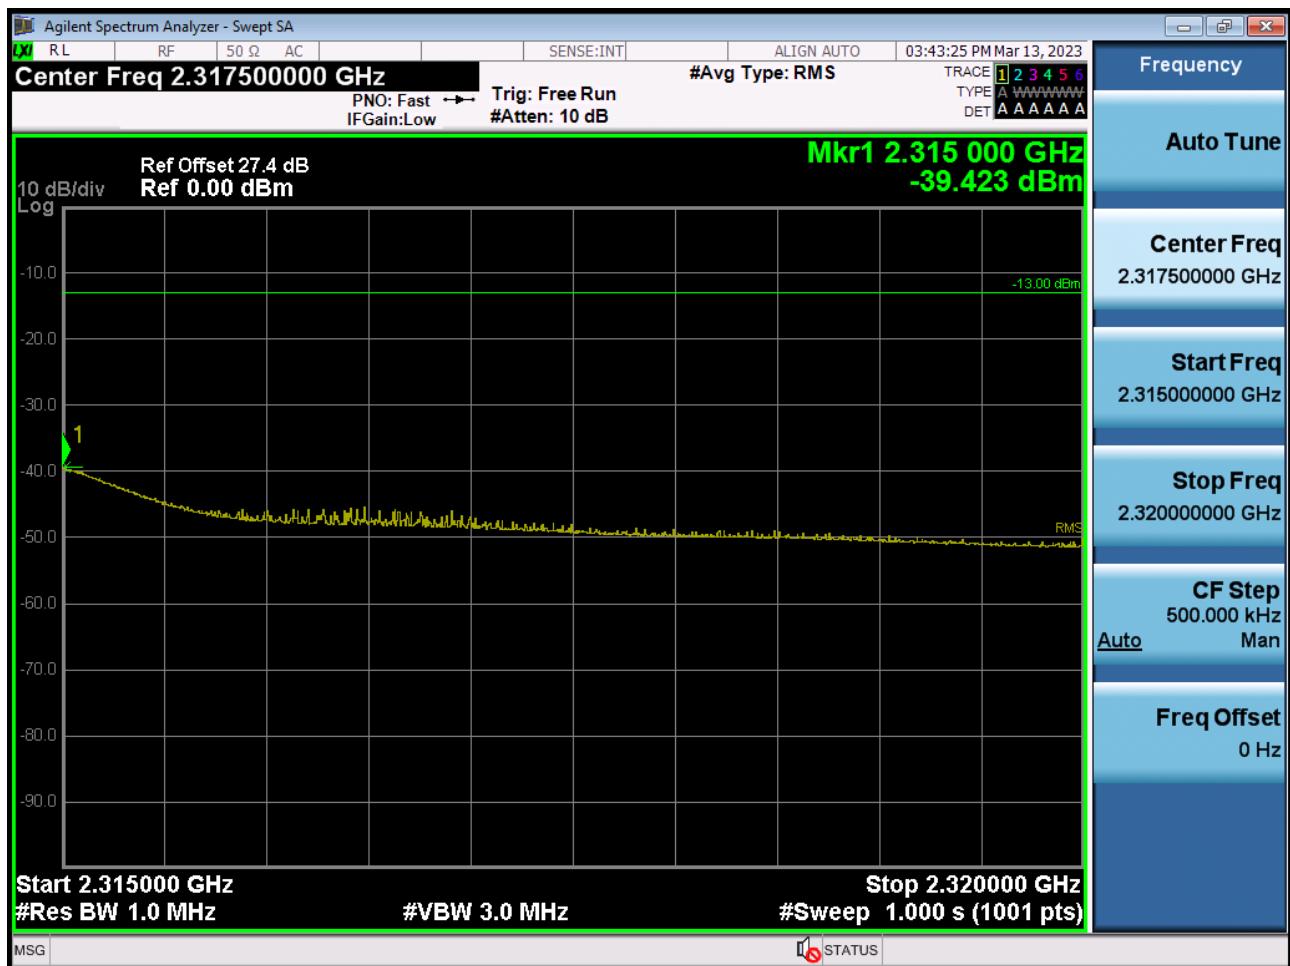


BAND 30. 5M_BandEdge(2315MHz-2320MHz)_Mid_2310MHz_QPSK_FullRB




BAND 30. 5M_BandEdge(2315MHz-2316MHz)_High_2312.5MHz_QPSK_1RB

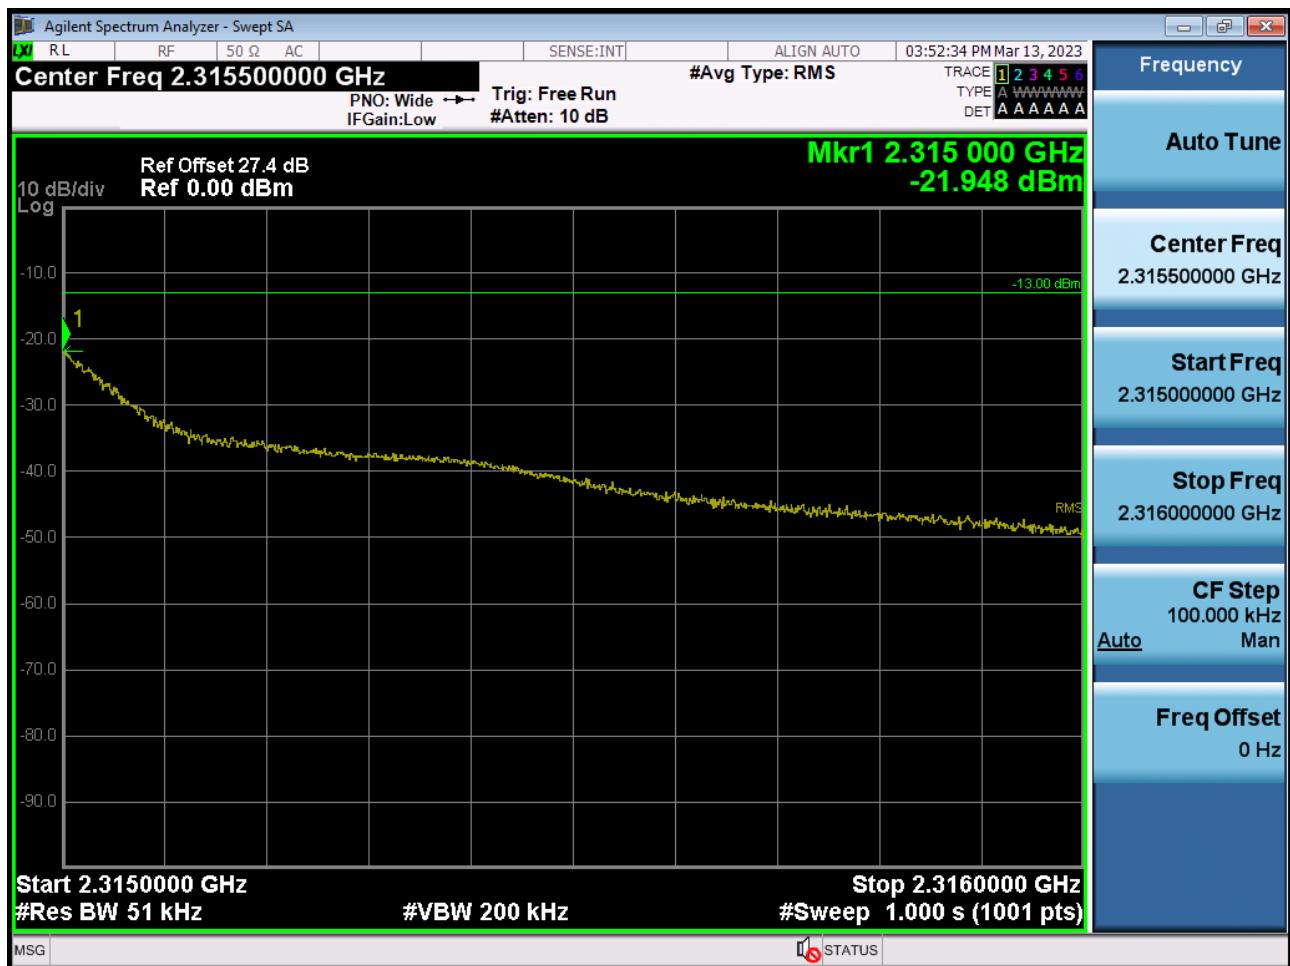

BAND 30. 5M_BandEdge(2315MHz-2316MHz)_High_2312.5MHz_QPSK_FullRB

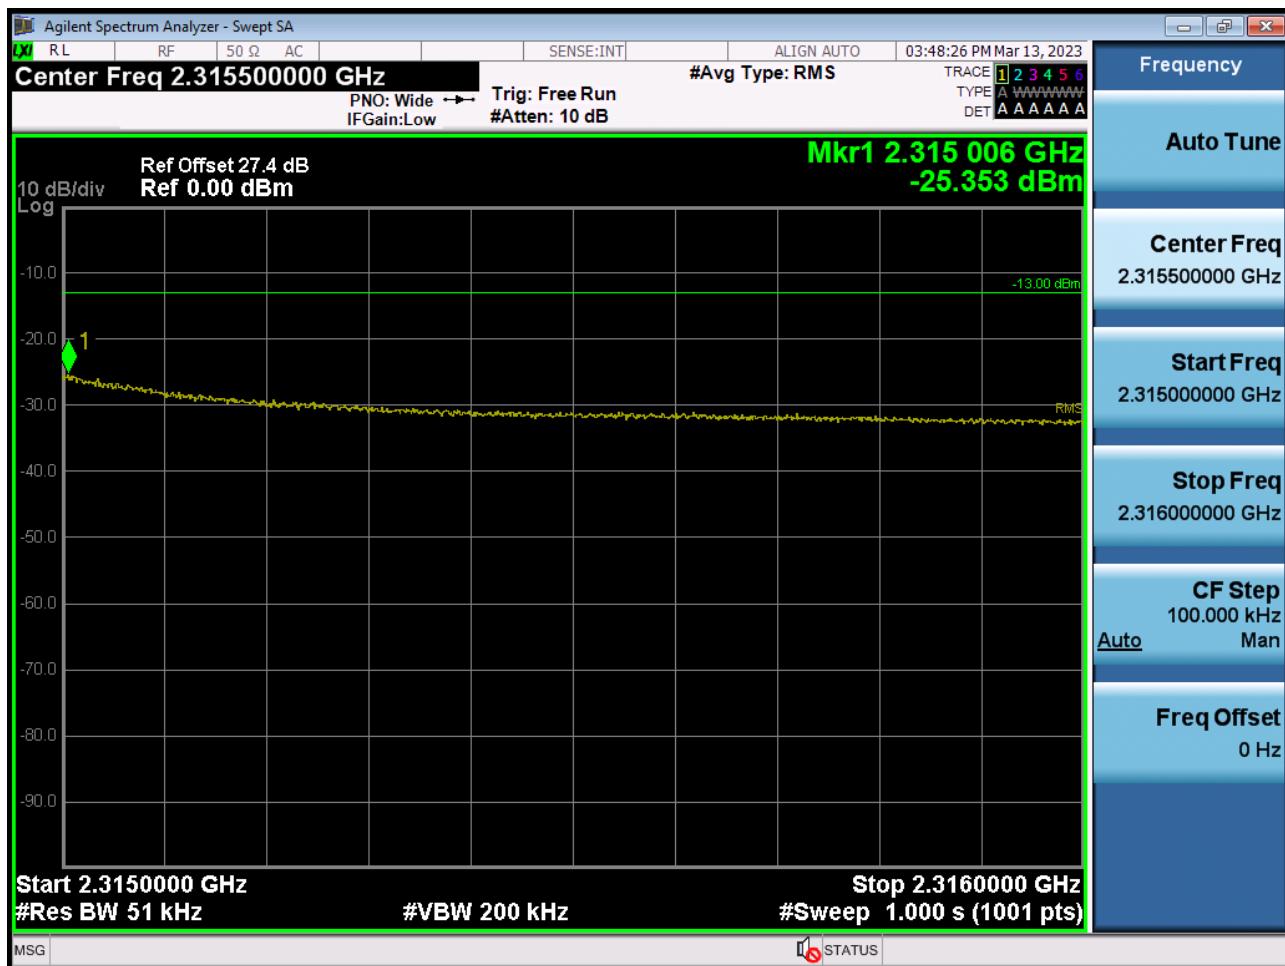

BAND 30. 5M_BandEdge(2316MHz-2320MHz)_High_2312.5MHz_QPSK_1RB

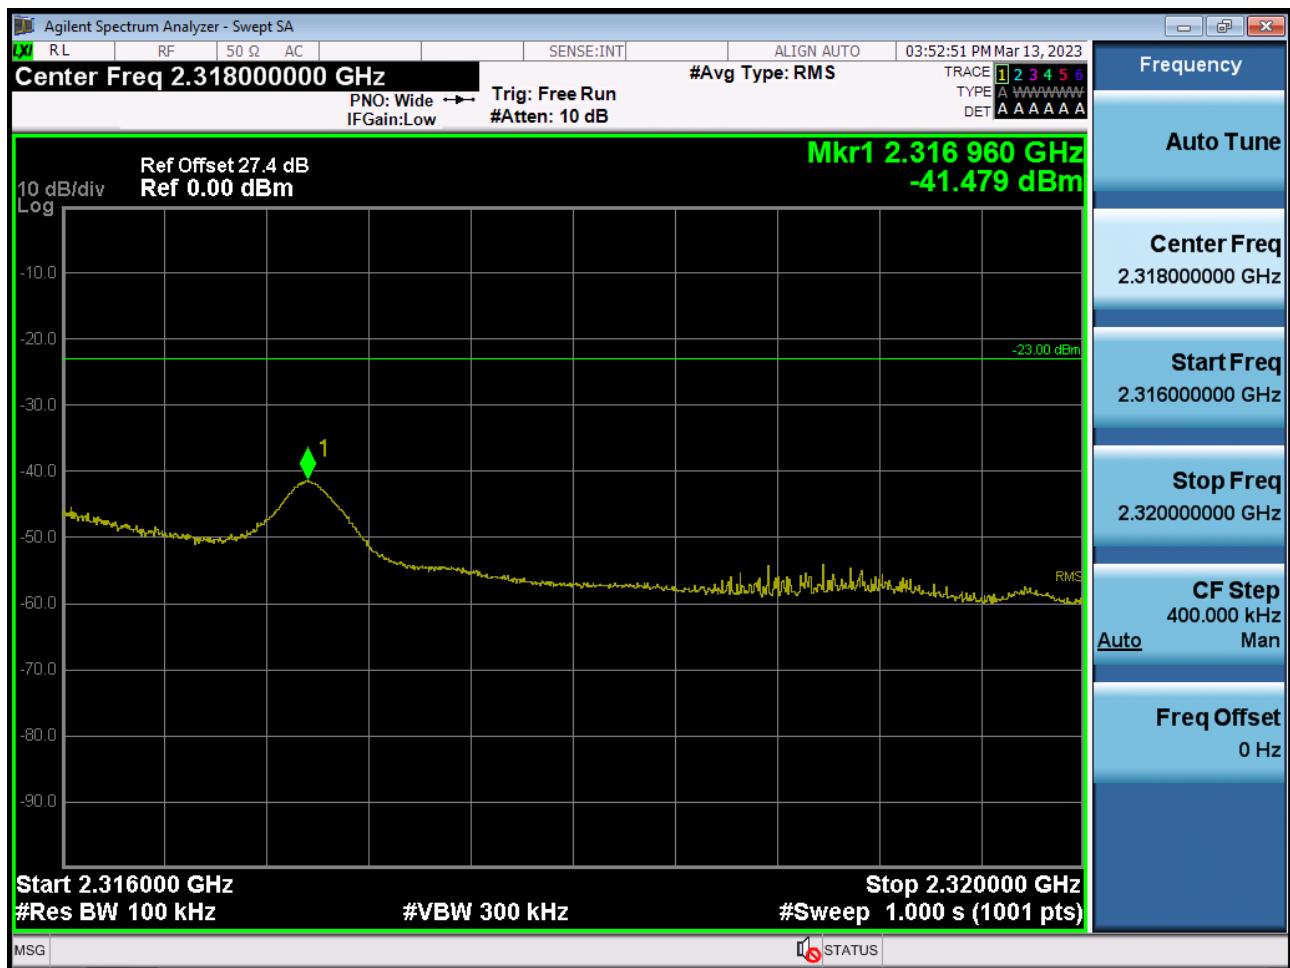

Note : We used a narrower RBW in order to increase accuracy.

Calculation = Reading Value + 10 x log(1 MHz/100 kHz) dB = -41.479 dBm + 10 dB = -31.479 dBm


BAND 30. 5M_BandEdge(2316MHz-2320MHz)_High_2312.5MHz_QPSK_FullRB



Note : We used a narrower RBW in order to increase accuracy.

Calculation = Reading Value + 10 x log(1 MHz/100 kHz) dB = -29.415 dBm + 10 dB = -19.415 dBm


BAND 30. 5M_BandEdge(2320MHz-2324MHz)_Low_2307.5MHz_QPSK_1RB

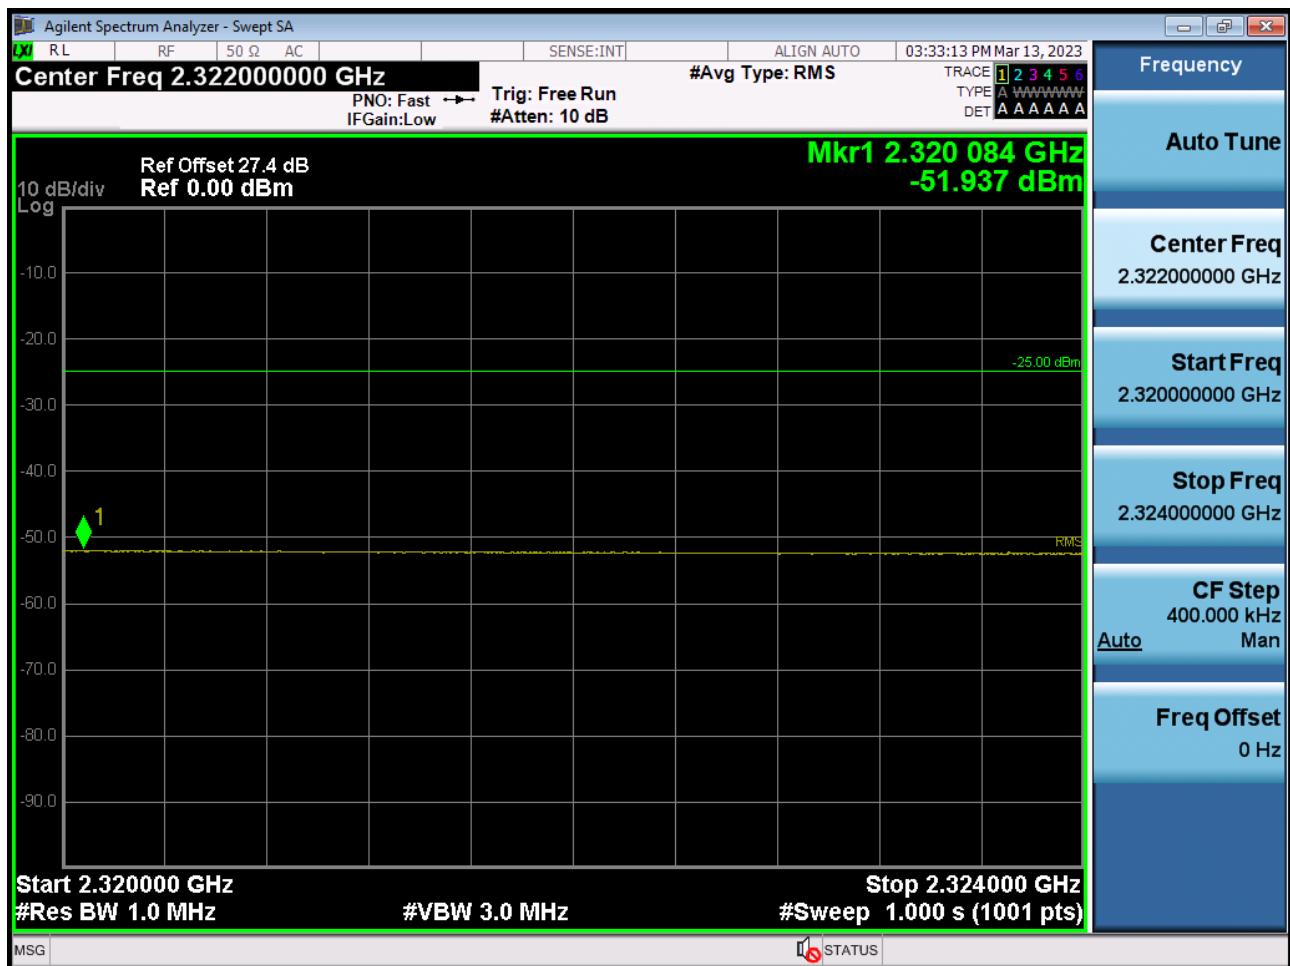


BAND 30. 5M_BandEdge(2320MHz-2324MHz)_Low_2307.5MHz_QPSK_FullRB



BAND 30. 5M_BandEdge(2320MHz-2324MHz)_Mid_2310MHz_QPSK_1RB

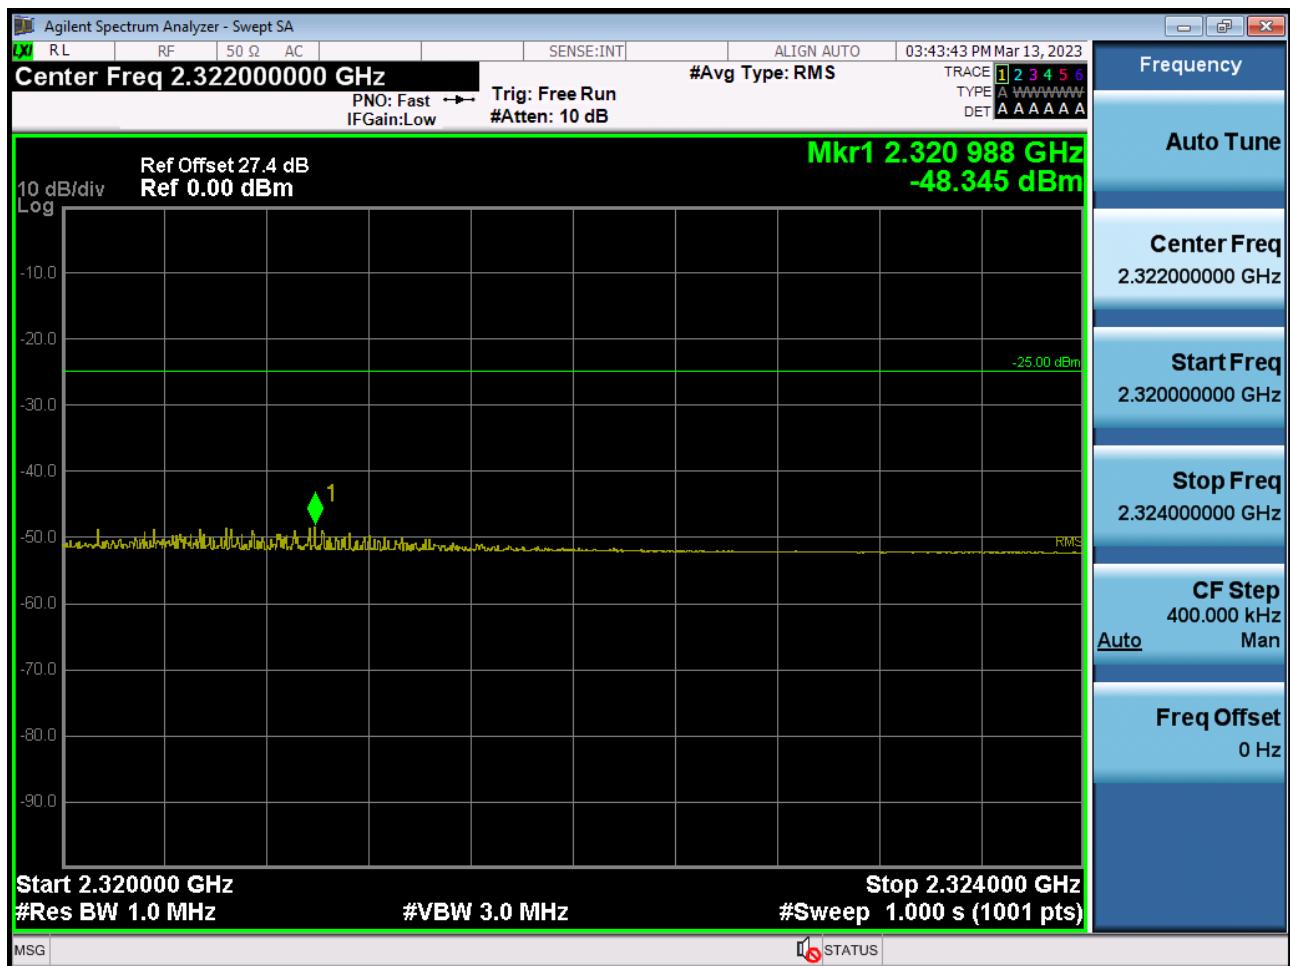

BAND 30. 5M_BandEdge(2320MHz-2324MHz)_Mid_2310MHz_QPSK_FullRB

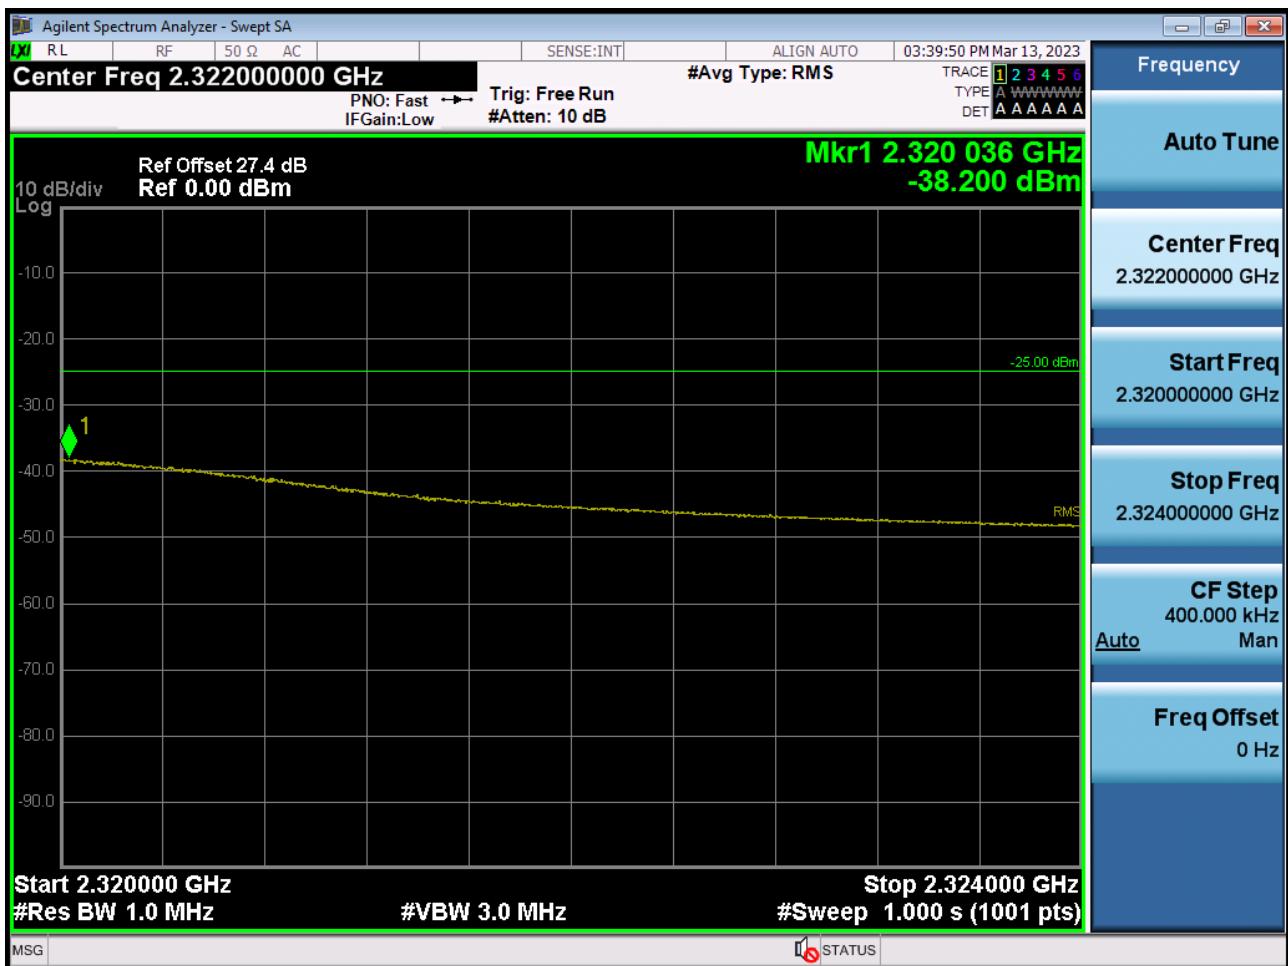

BAND 30. 5M_BandEdge(2320MHz-2324MHz)_High_2312.5MHz_QPSK_1RB



BAND 30. 5M_BandEdge(2320MHz-2324MHz)_High_2312.5MHz_QPSK_FullRB



BAND 30. 5M_BandEdge(2324MHz-2328MHz)_Low_2307.5MHz_QPSK_1RB



BAND 30. 5M_BandEdge(2324MHz-2328MHz)_Low_2307.5MHz_QPSK_FullRB




BAND 30. 5M_BandEdge(2324MHz-2328MHz)_Mid_2310MHz_QPSK_1RB



BAND 30. 5M_BandEdge(2324MHz-2328MHz)_Mid_2310MHz_QPSK_FullRB



BAND 30. 5M_BandEdge(2324MHz-2328MHz)_High_2312.5MHz_QPSK_1RB

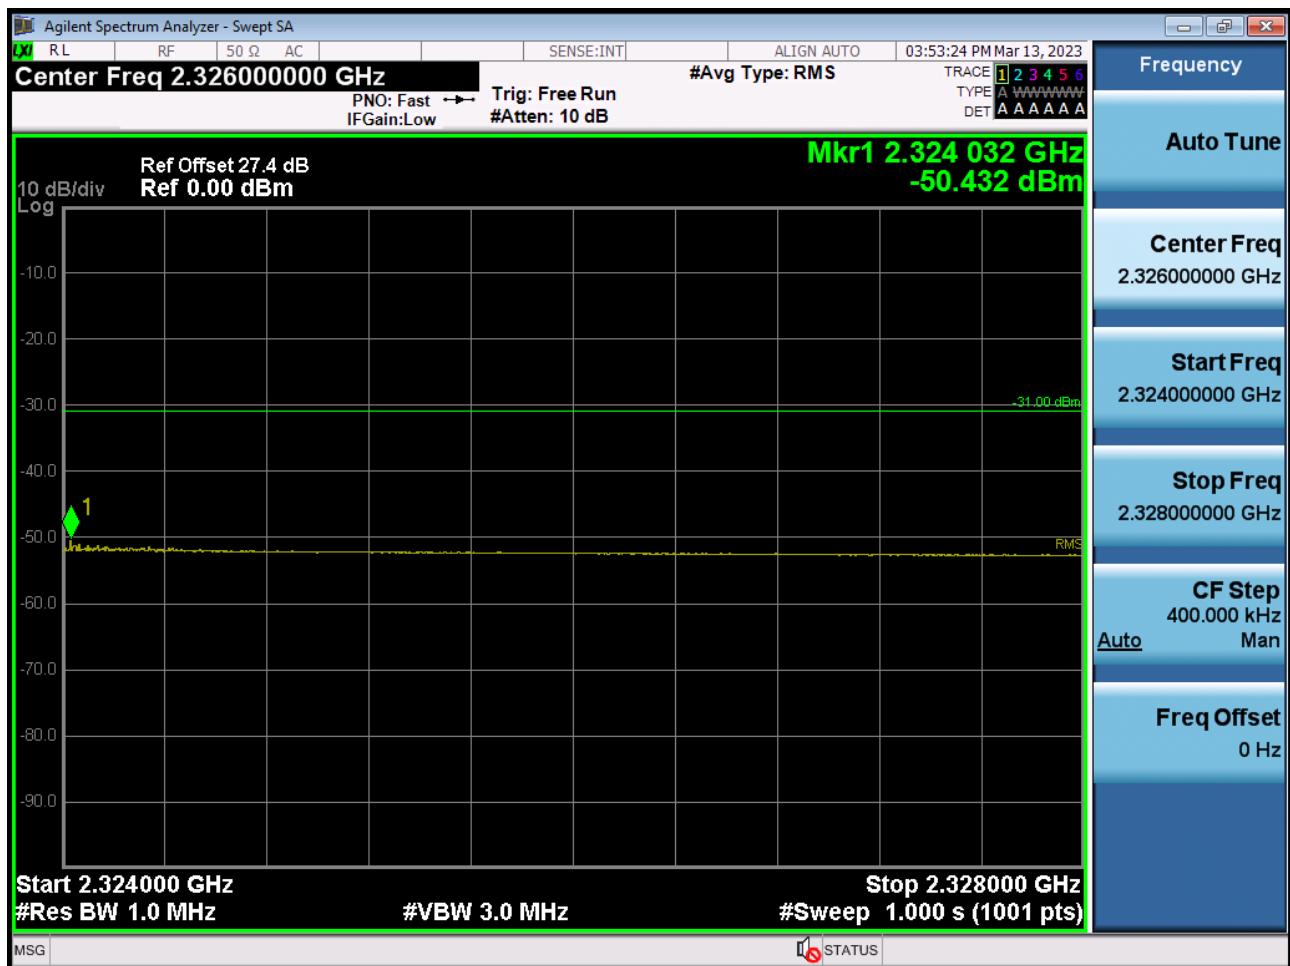

BAND 30. 5M_BandEdge(2324MHz-2328MHz)_High_2312.5MHz_QPSK_FullRB



BAND 30. 5M_BandEdge(2328MHz-2337MHz)_Low_2307.5MHz_QPSK_1RB




BAND 30. 5M_BandEdge(2328MHz-2337MHz)_Low_2307.5MHz_QPSK_FullRB



BAND 30. 5M_BandEdge(2328MHz-2337MHz)_Mid_2310MHz_QPSK_1RB




BAND 30. 5M_BandEdge(2328MHz-2337MHz)_Mid_2310MHz_QPSK_FullRB

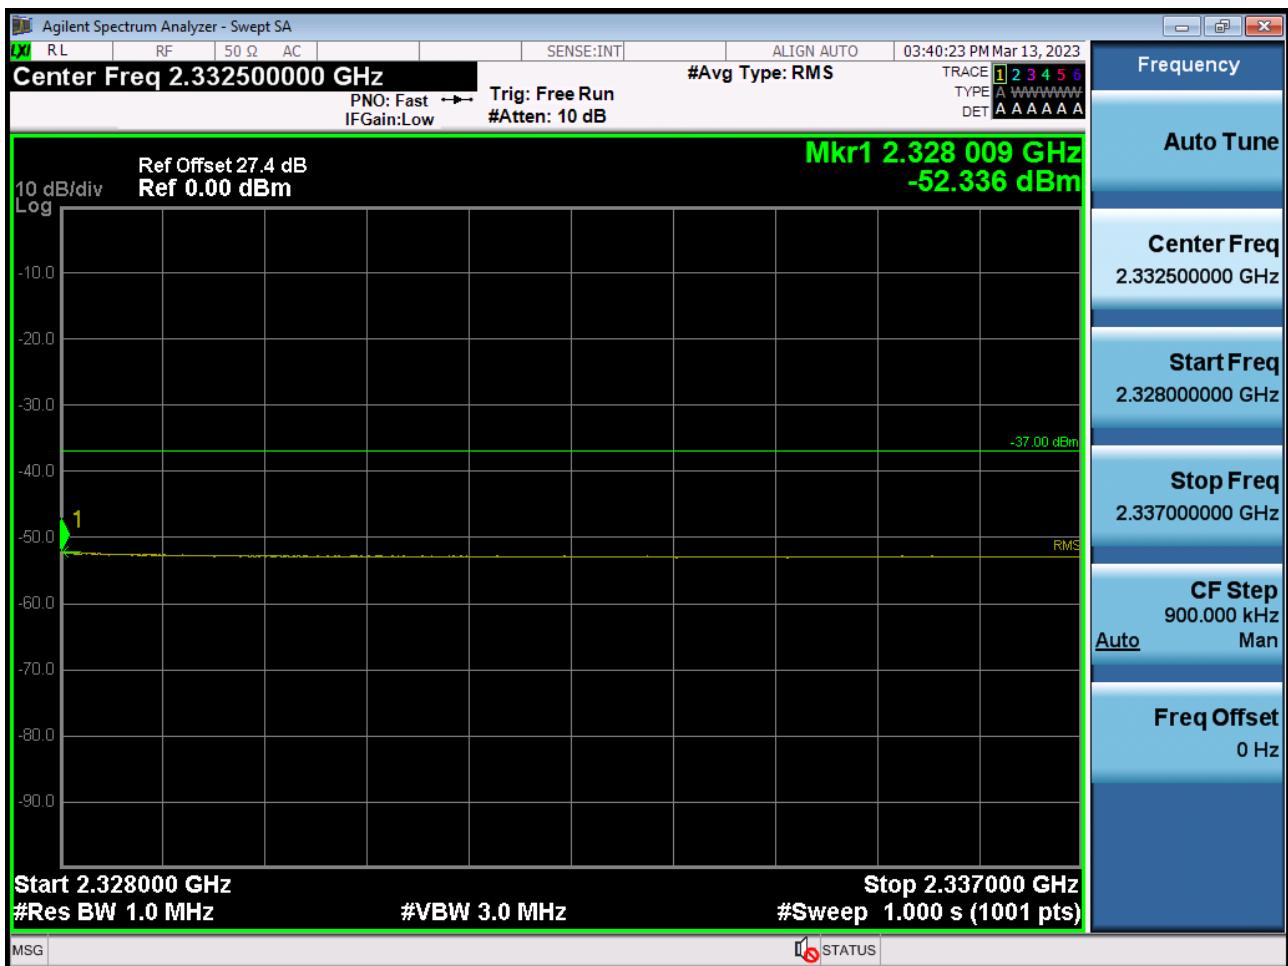

BAND 30. 5M_BandEdge(2328MHz-2337MHz)_High_2312.5MHz_QPSK_1RB



BAND 30. 5M_BandEdge(2328MHz-2337MHz)_High_2312.5MHz_QPSK_FullRB

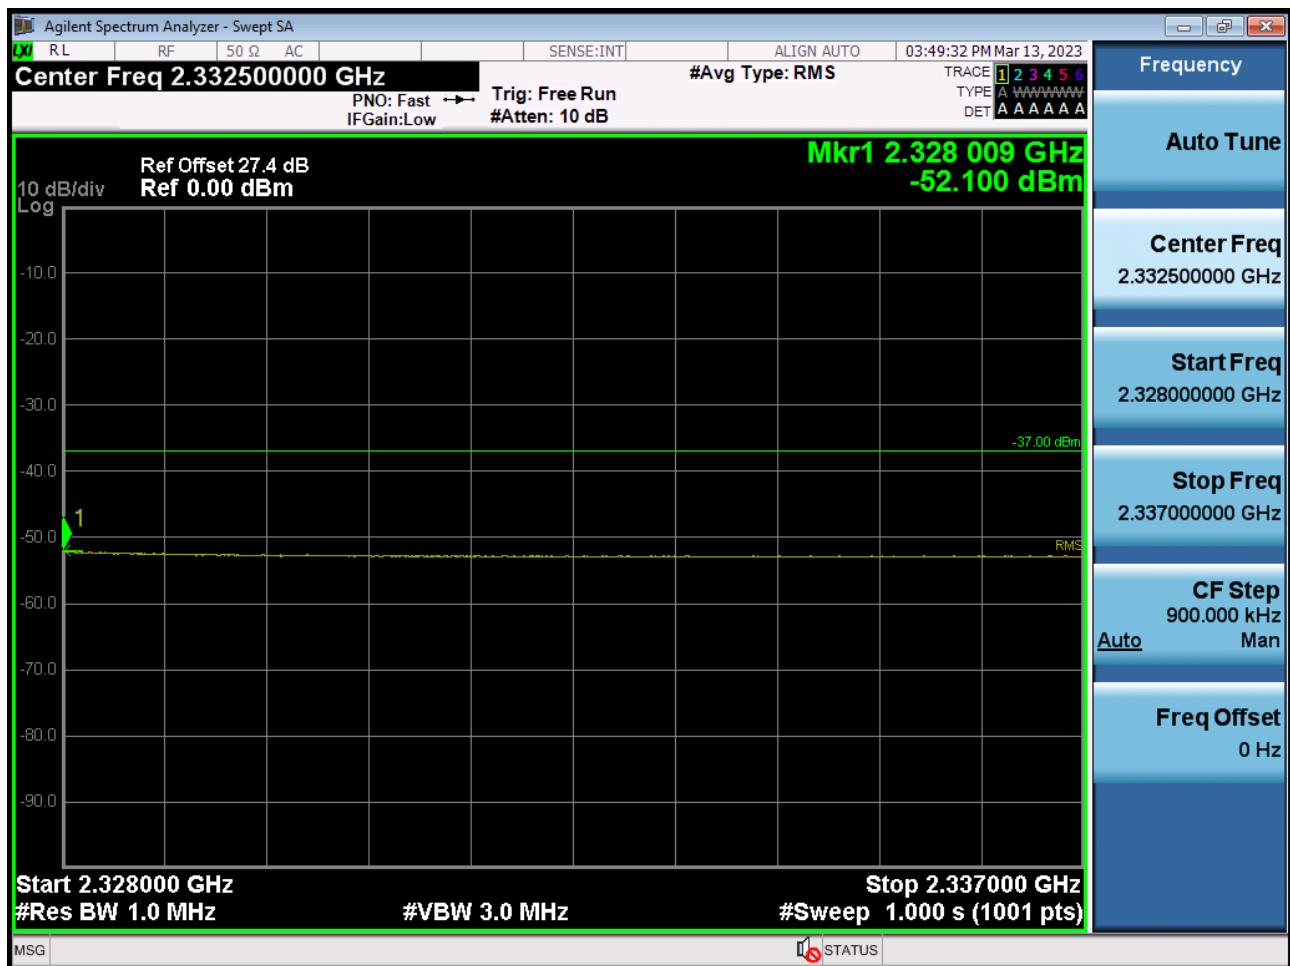

BAND 30. 5M_BandEdge(2337MHz-2341MHz)_Low_2307.5MHz_QPSK_1RB



BAND 30. 5M_BandEdge(2337MHz-2341MHz)_Low_2307.5MHz_QPSK_FullRB



BAND 30. 5M_BandEdge(2337MHz-2341MHz)_Mid_2310MHz_QPSK_1RB



BAND 30. 5M_BandEdge(2337MHz-2341MHz)_Mid_2310MHz_QPSK_FullRB




BAND 30. 5M_BandEdge(2337MHz-2341MHz)_High_2312.5MHz_QPSK_1RB



BAND 30. 5M_BandEdge(2337MHz-2341MHz)_High_2312.5MHz_QPSK_FullRB



BAND 30. 5M_BandEdge(2341MHz-2345MHz)_Low_2307.5MHz_QPSK_1RB

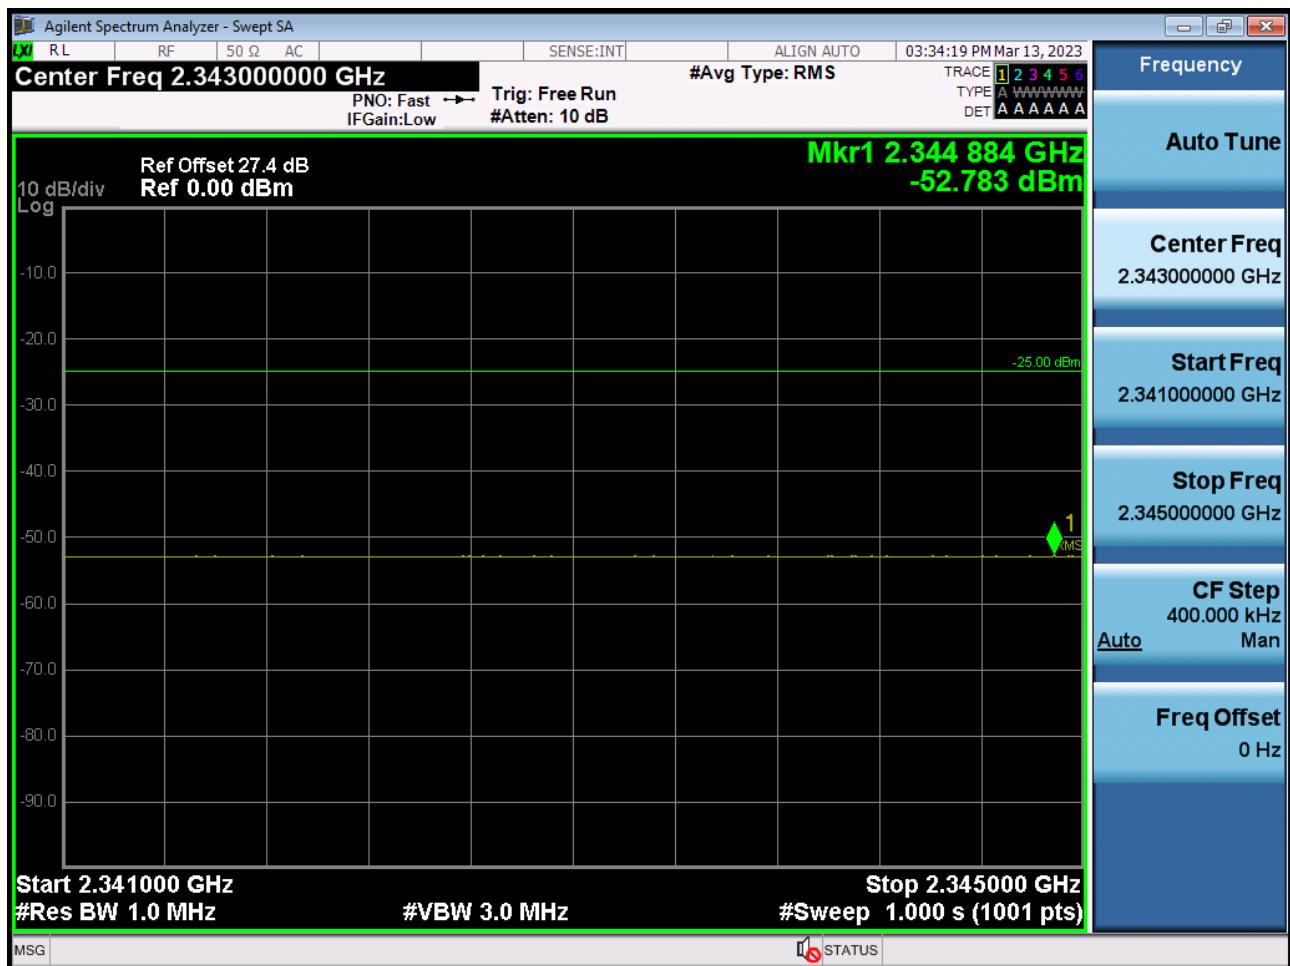


BAND 30. 5M_BandEdge(2341MHz-2345MHz)_Low_2307.5MHz_QPSK_FullRB



BAND 30. 5M_BandEdge(2341MHz-2345MHz)_Mid_2310MHz_QPSK_1RB



BAND 30. 5M_BandEdge(2341MHz-2345MHz)_Mid_2310MHz_QPSK_FullRB

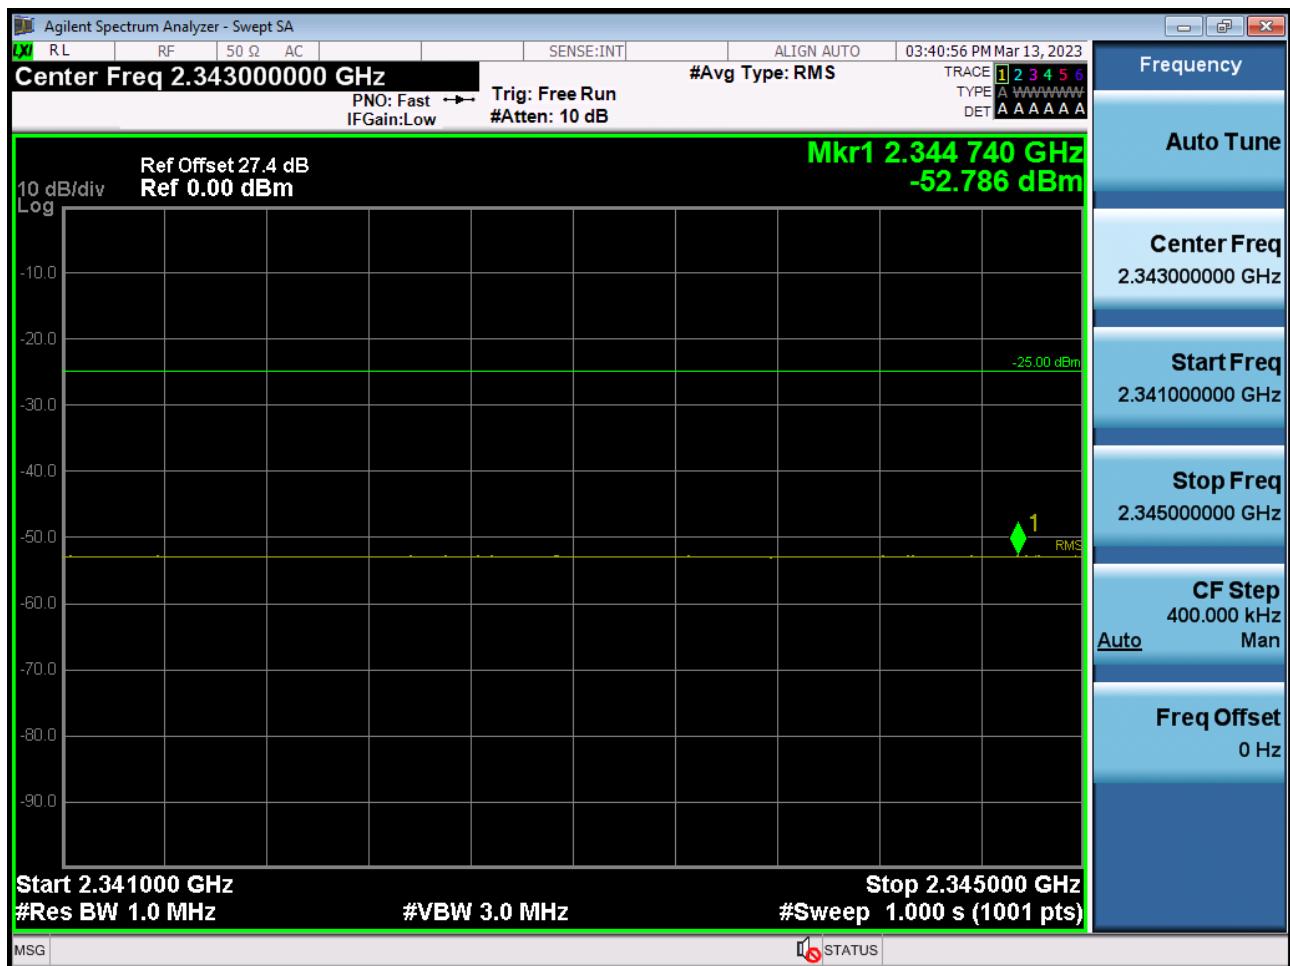

BAND 30. 5M_BandEdge(2341MHz-2345MHz)_High_2312.5MHz_QPSK_1RB



BAND 30. 5M_BandEdge(2341MHz-2345MHz)_High_2312.5MHz_QPSK_FullRB



BAND 30. 5M_BandEdge(2345MHz-2365MHz)_Low_2307.5MHz_QPSK_1RB



BAND 30. 5M_BandEdge(2345MHz-2365MHz)_Low_2307.5MHz_QPSK_FullRB



BAND 30. 5M_BandEdge(2345MHz-2365MHz)_Mid_2310MHz_QPSK_1RB




BAND 30. 5M_BandEdge(2345MHz-2365MHz)_Mid_2310MHz_QPSK_FullRB



BAND 30. 5M_BandEdge(2345MHz-2365MHz)_High_2312.5MHz_QPSK_1RB




BAND 30. 5M_BandEdge(2345MHz-2365MHz)_High_2312.5MHz_QPSK_FullRB

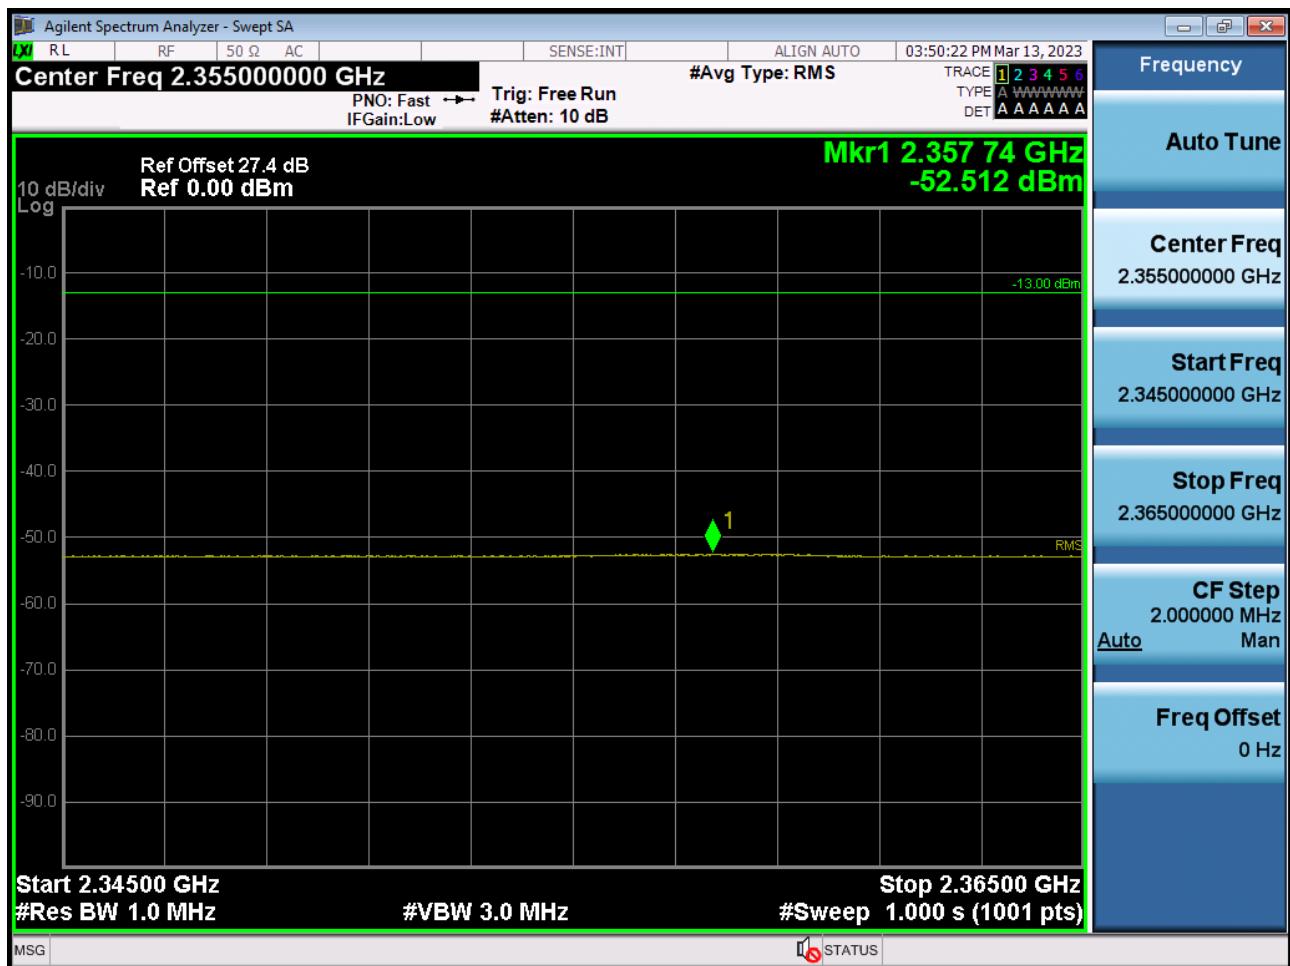

BAND 30. 5M_BandEdge(2365MHz-2400MHz)_Low_2307.5MHz_QPSK_1RB



BAND 30. 5M_BandEdge(2365MHz-2400MHz)_Low_2307.5MHz_QPSK_FullRB

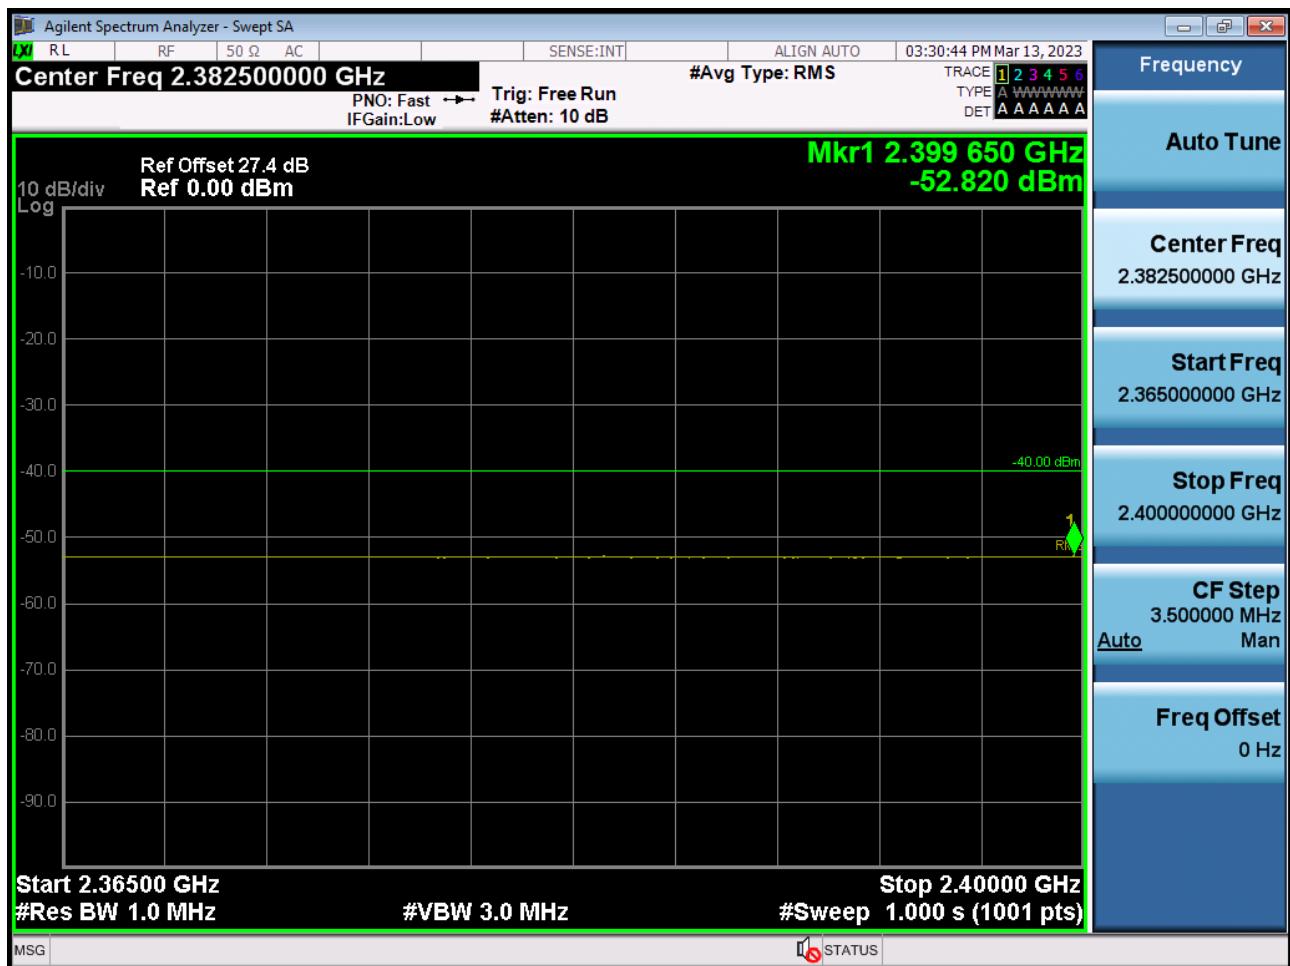

BAND 30. 5M_BandEdge(2365MHz-2400MHz)_Mid_2310MHz_QPSK_1RB




BAND 30. 5M_BandEdge(2365MHz-2400MHz)_Mid_2310MHz_QPSK_FullRB




BAND 30. 5M_BandEdge(2365MHz-2400MHz)_High_2312.5MHz_QPSK_1RB



BAND 30. 5M_BandEdge(2365MHz-2400MHz)_High_2312.5MHz_QPSK_FullRB

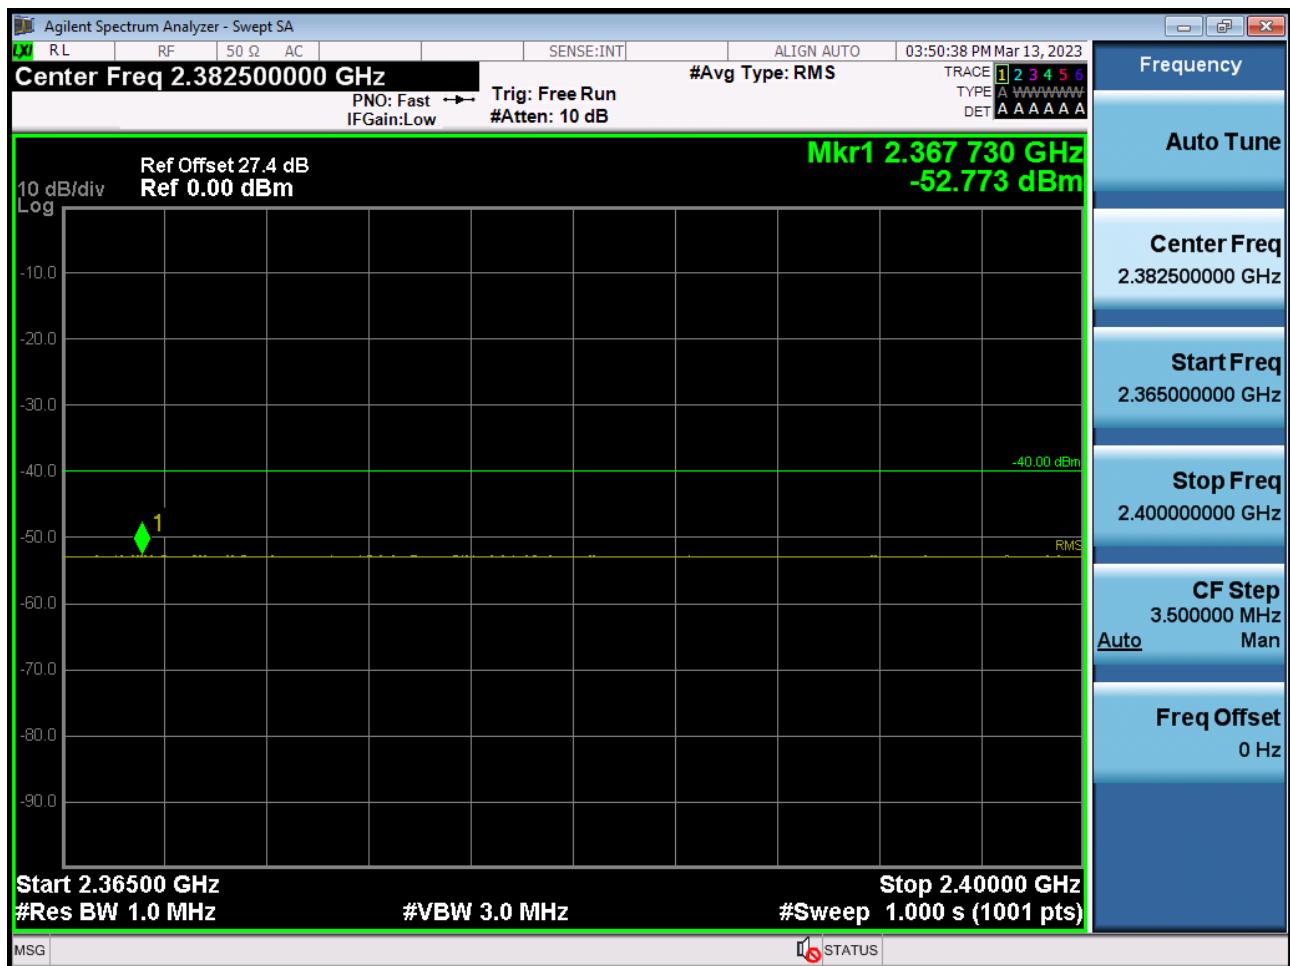

BAND 30. 10M_BandEdge(2280MHz-2288MHz)_Low_2310MHz_QPSK_1RB

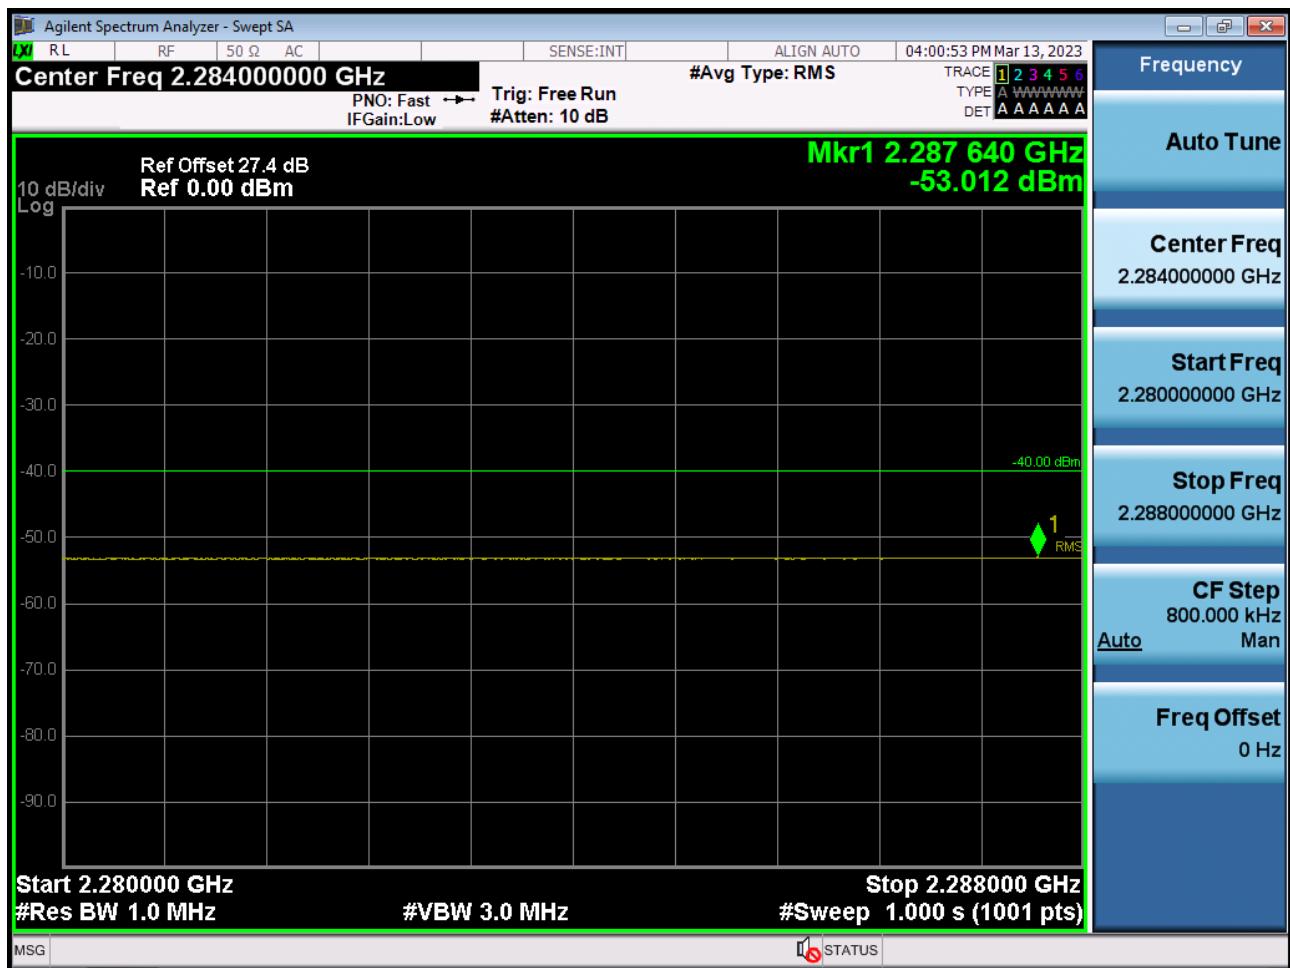

BAND 30. 10M_BandEdge(2280MHz-2288MHz)_Low_2310MHz_QPSK_FullIRB



BAND 30. 10M_BandEdge(2288MHz-2292MHz)_Low_2310MHz_QPSK_1RB

