

FCC LTE REPORT

Certification

Applicant Name: SAMSUNG Electronics Co., Ltd.	Date of Issue: May 09, 2023
Address: 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea	Location: HCT CO., LTD., 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA
	Report No.: HCT-RF-2305-FC019

FCC ID:	A3LSMX818U
APPLICANT:	SAMSUNG Electronics Co., Ltd.

Model(s): SM-X818U
 EUT Type: Tablet
 FCC Classification: PCS Licensed Transmitter (PCB)
 FCC Rule Part(s): §27, §2

Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	ERP	
				Max. Power (W)	Max. Power (dBm)
LTE – Band71 (5)	665.5 - 695.5	4M52G7D	QPSK	0.153	21.85
		4M50W7D	16QAM	0.133	21.23
		4M51W7D	64QAM	0.103	20.14
		4M51W7D	256QAM	0.051	17.06
LTE – Band71 (10)	668.0 - 693.0	9M00G7D	QPSK	0.155	21.89
		8M99W7D	16QAM	0.122	20.86
		8M99W7D	64QAM	0.095	19.77
		8M99W7D	256QAM	0.047	16.75
LTE – Band71 (15)	670.5 - 690.5	13M5G7D	QPSK	0.142	21.51
		13M5W7D	16QAM	0.116	20.65
		13M5W7D	64QAM	0.091	19.58
		13M5W7D	256QAM	0.046	16.65
LTE – Band71 (20)	673.0 - 688.0	18M0G7D	QPSK	0.150	21.77
		18M0W7D	16QAM	0.127	21.05
		17M9W7D	64QAM	0.098	19.93
		17M9W7D	256QAM	0.048	16.82

The measurements shown in this report were made in accordance with the procedures specified in CFR47 section §2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.
 HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998,21 U.S. C.853(a)

Report No.: HCT-RF-2305-FC019

REVIEWED BY



Report prepared by : Jae Mun Do
Engineer of Telecommunication Testing Center

Report approved by : Jong Seok Lee
Manager of Telecommunication Testing Center

This test results were applied only to the test methods required by the standard.

This laboratory is not accredited for the test results marked *.

The above Test Report is the accredited test result by (KS Q) ISO/IEC 17025 and KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA. (HCT Accreditation No.: KT197)

* The report shall not be reproduced except in full(only partly) without approval of the laboratory.

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-RF-2305-FC019	May 09, 2023	- First Approval Report

The result shown in this test report refer only to the sample(s) tested unless otherwise stated.

Table of Contents

REVIEWED BY	2
1. GENERAL INFORMATION	5
2. INTRODUCTION	6
2.1. DESCRIPTION OF EUT	6
2.2. MEASURING INSTRUMENT CALIBRATION	6
2.3. TEST FACILITY	6
3. DESCRIPTION OF TESTS.....	7
3.1 TEST PROCEDURE	7
3.2 RADIATED POWER.....	8
3.3 RADIATED SPURIOUS EMISSIONS	9
3.4 OCCUPIED BANDWIDTH.	10
3.5 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL	11
3.6 BAND EDGE	12
3.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	13
3.8 WORST CASE(RADIATED TEST)	14
3.9 WORST CASE(CONDUCTED TEST)	15
4. LIST OF TEST EQUIPMENT	16
5. MEASUREMENT UNCERTAINTY	17
6. SUMMARY OF TEST RESULTS	18
7. SAMPLE CALCULATION	19
8. TEST DATA	21
8.1 EFFECTIVE RADIATED POWER.....	21
8.2 RADIATED SPURIOUS EMISSIONS	23
8.3 OCCUPIED BANDWIDTH	24
8.4 CONDUCTED SPURIOUS EMISSIONS	25
8.5 BAND EDGE	25
8.6 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	26
9. TEST PLOTS.....	38
10. ANNEX A_ TEST SETUP PHOTO.....	91

MEASUREMENT REPORT

1. GENERAL INFORMATION

Applicant Name:	SAMSUNG Electronics Co., Ltd.
Address:	129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
FCC ID:	A3LSMX818U
Application Type:	Certification
FCC Classification:	PCS Licensed Transmitter (PCB)
FCC Rule Part(s):	§27, §2
EUT Type:	Tablet
Model(s):	SM-X818U
Tx Frequency:	665.5 MHz – 695.5 MHz (LTE – Band 71 (5 MHz)) 668.0 MHz – 693.0 MHz (LTE – Band 71 (10 MHz)) 670.5 MHz – 690.5 MHz (LTE – Band 71 (15 MHz)) 673.0 MHz – 688.0 MHz (LTE – Band 71 (20 MHz))
Date(s) of Tests:	March 13, 2023 ~ April 27, 2023
Serial number:	Radiated: R32W2003H3M Conducted: R32W2003JJD

2. INTRODUCTION

2.1. DESCRIPTION OF EUT

The EUT was a Tablet with UMTS and LTE, Sub6.

It also supports IEEE 802.11 a/b/g/n/ac/ax (20/40/80/160 MHz), WIFI 6E AIT, Keyboard, S-pen, mmWave.

2.2. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

2.3. TEST FACILITY

The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the **74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.**

3. DESCRIPTION OF TESTS

3.1 TEST PROCEDURE

Test Description	Test Procedure Used
Occupied Bandwidth	- KDB 971168 D01 v03r01 – Section 4.3 - ANSI C63.26-2015 – Section 5.4.4
Band Edge	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Spurious and Harmonic Emissions at Antenna Terminal	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Conducted Output Power	- N/A (See SAR Report)
Frequency stability	- ANSI C63.26-2015 – Section 5.6
Effective Radiated Power/ Effective Isotropic Radiated Power	- KDB 971168 D01 v03r01 – Section 5.2 & 5.8 - ANSI/TIA-603-E-2016 – Section 2.2.17
Radiated Spurious and Harmonic Emissions	- KDB 971168 D01 v03r01 – Section 6.2 - ANSI/TIA-603-E-2016 – Section 2.2.12

3.2 RADIATED POWER

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna in accordance with ANSI/TIA-603-E-2016 Clause 2.2.17.

Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5 % of the expected OBW, not to exceed 1 MHz
3. VBW \geq 3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points $>$ 2 x span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

Test Note

1. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission.
2. A half wave dipole is then substituted in place of the EUT. For emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_d \text{ (dBm)} = P_g \text{ (dBm)} - \text{cable loss (dB)} + \text{antenna gain (dB)}$$

Where: P_d is the dipole equivalent power and P_g is the generator output power into the substitution antenna.

3. The maximum value is calculated by adding the forward power to the calibrated source plus its appropriate gain value.

These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference

between the gain of the horn and an isotropic antenna are taken into consideration

4. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
5. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

3.3 RADIATED SPURIOUS EMISSIONS

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA-603-E-2016.

Test Settings

1. RBW = 100 kHz for emissions below 1 GHz and 1 MHz for emissions above 1 GHz
2. VBW $\geq 3 \times$ RBW
3. Span = 1.5 times the OBW
4. No. of sweep points $> 2 \times$ span / RBW
5. Detector = Peak
6. Trace mode = Max Hold
7. The trace was allowed to stabilize
8. Test channel : Low/ Middle/ High
9. Frequency range : We are performed all frequency to 10th harmonics from 9 kHz.

Test Note

1. Measurements value show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
2. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test data
3. For spurious emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The spurious emissions is calculated by the following formula;


$$\text{Result}_{(dBm)} = P_g_{(dBm)} - \text{cable loss}_{(dB)} + \text{antenna gain}_{(dBi)}$$

Where: P_g is the generator output power into the substitution antenna.

If the fundamental frequency is below 1 GHz, RF output power has been converted to EIRP.

$$\text{EIRP}_{(dBm)} = \text{ERP}_{(dBm)} + 2.15$$

3.4 OCCUPIED BANDWIDTH.

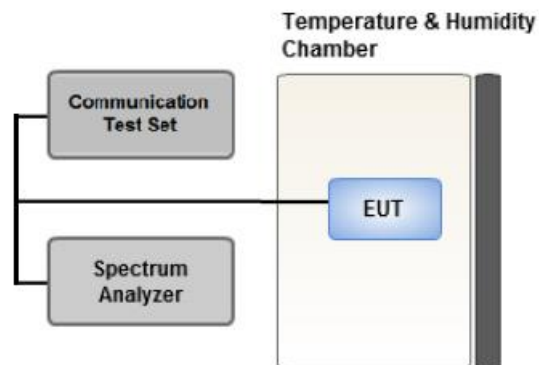

Test setup

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

The EUT makes a call to the communication simulator.


The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99 % occupied bandwidth and the 26 dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5 % of the expected OBW
3. VBW \geq 3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5 % of the 99 % occupied bandwidth observed in Step 7

3.5 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL

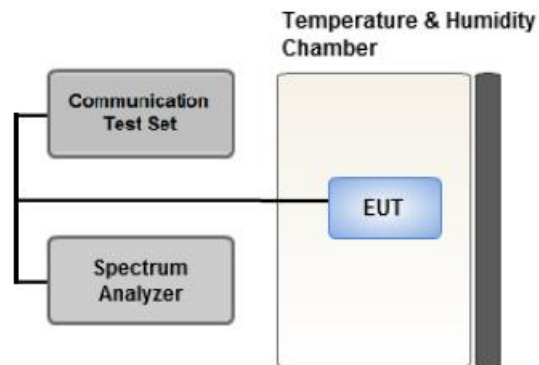

Test setup


Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. RBW = 1 MHz
2. VBW \geq 3 MHz
3. Detector = RMS
4. Trace Mode = trace average
5. Sweep time = auto
6. Number of points in sweep \geq 2 * Span / RBW

3.6 BAND EDGE

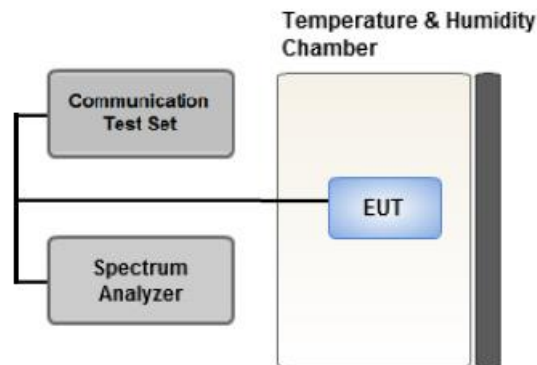

Test setup

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW > 1 % of the emission bandwidth
4. VBW > 3 x RBW
5. Detector = RMS
6. Number of sweep points $\geq 2 \times \text{Span/RBW}$
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Notes

According to FCC 22.917, 24.238, 27.53 specified that power of any emission outside of The authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater.


However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

All measurements were done at 2 channels(low and high operational frequency range.)

The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

Where Margin < 1 dB the emission level is either corrected by $10 \log(1 \text{ MHz/ RB})$ or the emission is integrated over a 1 MHz bandwidth to determine the final result. When using the integration method the integration window is either centered on the emission or, for emissions at the band edge, centered by an offset of 500 kHz from the block edge so that the integration window is the 1 MHz adjacent to the block edge.

3.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

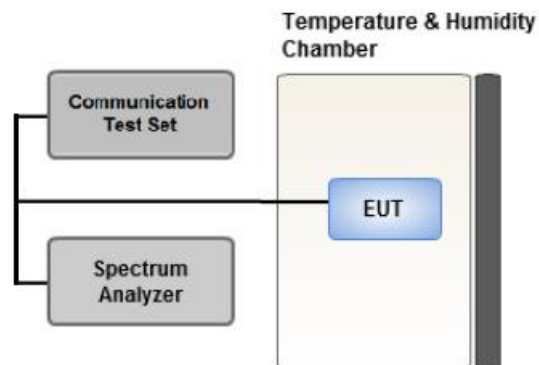

Test setup

Test Overview

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015.

The frequency stability of the transmitter is measured by:

1. Temperature:

The temperature is varied from -30 °C to +50 °C in 10 °C increments using an environmental chamber.

2. Primary Supply Voltage:

- Unless otherwise specified, vary primary supply voltage from 85 % to 115 % of the nominal value for other than hand carried battery equipment.

- For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20 °C to provide a reference).
2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10 °C intervals ranging from -30 °C to +50 °C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

3.8 WORST CASE(RADIATED TEST)

- The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
- All modes of operation were investigated and the worst case configuration results are reported.
 Mode : Stand alone, Stand alone + External accessories (Earphone, AC adapter, etc)
 Worst case : Stand alone
- We were performed the RSE test in condition of co-location.
 Mode : Stand alone, Simultaneous transmission scenarios
 Worst case : Stand alone
- In the case of radiated spurious emissions, all bandwidth of operation were investigated and the worst case bandwidth results are reported. (Worst case : 10 MHz)
- The worst case is reported with the EUT positioning, modulations, and paging service configurations shown in the test data.

[Worst case]

Test Description	Modulation	Bandwidth (MHz)	Frequency	RB size	RB offset	Axis
Effective Radiated Power	QPSK, 16QAM, 64QAM, 256QAM	5	Low, Mid	1	24	Z
			High	1	13	
		10	Low, Mid	1	49	
			High	1	25	
		15	Low, Mid	1	74	
			High	1	38	
		20	Low, Mid	1	99	
			High	1	50	
Radiated Spurious and Harmonic Emissions	QPSK	10	Low, Mid	1	49	X
			High	1	25	

3.9 WORST CASE(CONDUCTED TEST)

- All modes of operation were investigated and the worst case configuration results are reported.

[Worst case]

Test Description	Modulation	Bandwidth (MHz)	Frequency	RB size	RB offset
Occupied Bandwidth	QPSK, 16QAM, 64QAM, 256QAM	5,10,15,20	Mid	Full RB	0
Band Edge	QPSK	5	Low	1	0
			High	1	24
		10	Low	1	0
			High	1	49
		15	Low	1	0
			High	1	74
		20	Low	1	0
			High	1	99
		5,10,15,20	Low, High	Full RB	0
Spurious and Harmonic Emissions at Antenna Terminal	QPSK	5,10,15,20	Low, Mid, High	1	0

4. LIST OF TEST EQUIPMENT

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
H.P.F	FBSR-02B(WHK1.2/15 G-10EF)	T&M SYSTEM	-	01/19/2024	Annual
H.P.F	FBSR-02B(WHK3.3/18 G-10EF)	T&M SYSTEM	-	01/19/2024	Annual
Power Splitter(DC ~ 26.5 GHz)	11667B	Hewlett Packard	5001	04/19/2024	Annual
DC Power Supply	E3632A	Agilent	MY40010147	06/21/2023	Annual
Dipole Antenna	UHAP	Schwarzbeck	557	03/09/2025	Biennial
Dipole Antenna	UHAP	Schwarzbeck	558	03/09/2025	Biennial
Chamber	SU-642	ESPEC	93008124	02/22/2024	Annual
Horn Antenna(1 ~ 18 GHz)	BBHA 9120D	Schwarzbeck	147	08/30/2023	Biennial
Horn Antenna(1 ~ 18 GHz)	BBHA 9120D	Schwarzbeck	9120D-1298	09/15/2023	Biennial
Horn Antenna(15 ~ 40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170342	09/29/2024	Biennial
Horn Antenna(15 ~ 40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170124	03/28/2025	Biennial
Signal Analyzer(10 Hz ~ 26.5 GHz)	N9020A	Agilent	MY52090906	04/20/2024	Annual
ATTENUATOR(20 dB)	8493C	Hewlett Packard	17280	04/19/2024	Annual
Spectrum Analyzer(10 Hz ~ 40 GHz)	FSV40	REOHDE & SCHWARZ	100931	08/29/2023	Annual
Base Station	8960 (E5515C)	Agilent	MY48360800	08/18/2023	Annual
Loop Antenna(9 kHz ~ 30 MHz)	FMZB1513	Schwarzbeck	1513-333	03/17/2024	Biennial
Trilog Broadband Antenna	VULB9168	Schwarzbeck	895	08/16/2024	Biennial
Trilog Broadband Antenna	VULB9168	Schwarzbeck	1135	03/21/2024	Biennial
Wideband Radio Communication Tester	MT8821C	Anritsu Corp.	6262094331	12/01/2023	Annual
Wideband Radio Communication Tester	MT8820C	Anritsu Corp.	6201026545	01/05/2024	Annual
SIGNAL GENERATOR (100 kHz ~ 40 GHz)	SMB100A	REOHDE & SCHWARZ	177633	07/05/2023	Annual
Signal Analyzer(5 Hz ~ 40.0 GHz)	N9030B	KEYSIGHT	MY55480167	05/30/2023	Annual
FCC LTE Mobile Conducted RF Automation Test Software	-	HCT CO., LTD.,	-	-	-

Note:

1. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
2. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

5. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty (\pm dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.90 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (9 kHz ~ 30 MHz)	4.14 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (30 MHz ~ 1 GHz)	5.82 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (1 GHz ~ 18 GHz)	5.74 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (18 GHz ~ 40 GHz)	5.76 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (Above 40 GHz)	5.52 (Confidence level about 95 %, $k=2$)

6. SUMMARY OF TEST RESULTS

6.1 Test Condition : Conducted Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Occupied Bandwidth	§2.1049	N/A	PASS
Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	§2.1051, §27.53(g)	< 43 + 10log10 (P[Watts]) at Band Edge and for all out-of-band emissions	PASS
Conducted Output Power	§2.1046	N/A	<u>See Note1</u>
Frequency stability / variation of ambient temperature	§2.1055, §27.54	Emission must remain in band	PASS

Note:

1. See SAR Report

6.2 Test Condition : Radiated Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Effective Radiated Power	§27.50(c)(10)	< 3 Watts max. ERP	PASS
Radiated Spurious and Harmonic Emissions	§2.1053, §27.53(g)	< 43 + 10log10 (P[Watts]) for all out-of band emissions	PASS

7. SAMPLE CALCULATION

7.1 ERP Sample Calculation

Ch./ Freq.		Measured Level(dBm)	Substitute Level(dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
channel	Freq.(MHz)						W	dBm
128	824.20	-21.37	38.40	-10.61	0.95	H	0.483	26.84

ERP = Substitute LEVEL(dBm) + Ant. Gain – CL(Cable Loss)

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power.

7.2 EIRP Sample Calculation

Ch./ Freq.		Measured Level(dBm)	Substitute Level(dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
channel	Freq.(MHz)						W	dBm
20175	1,732.50	-15.75	18.45	9.90	1.76	H	0.456	26.59

EIRP = Substitute LEVEL(dBm) + Ant. Gain – CL(Cable Loss)

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of equivalent isotropic radiated power.

7.3. Emission Designator

GSM Emission Designator

Emission Designator = 249KGXW

GSM BW = 249 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

EDGE Emission Designator

Emission Designator = 249KG7W

GSM BW = 249 kHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M17F9W

WCDMA BW = 4.17 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

QPSK Modulation

Emission Designator = 4M48G7D

LTE BW = 4.48 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

QAM Modulation

Emission Designator = 4M48W7D

LTE BW = 4.48 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

8. TEST DATA

8.1 EFFECTIVE RADIATED POWER

Freq (MHz)	Mod (Bandwidth)	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBd)	C.L	Pol	Limit W	ERP	
									W	dBm
665.5	LTE B71 (5 MHz)	QPSK	-27.79	32.09	-9.91	1.27	V	< 3.00	0.123	20.91
		16-QAM	-28.57	31.31	-9.91	1.27	V		0.103	20.13
		64-QAM	-29.65	30.23	-9.91	1.27	V		0.080	19.05
		256-QAM	-32.72	27.16	-9.91	1.27	V		0.040	15.98
680.5		QPSK	-26.43	33.00	-9.87	1.28	V		0.153	21.85
		16-QAM	-27.05	32.38	-9.87	1.28	V		0.133	21.23
		64-QAM	-28.14	31.29	-9.87	1.28	V		0.103	20.14
		256-QAM	-31.22	28.21	-9.87	1.28	V		0.051	17.06
695.5		QPSK	-26.98	32.27	-9.83	1.29	V		0.131	21.16
		16-QAM	-27.83	31.42	-9.83	1.29	V		0.107	20.31
		64-QAM	-28.82	30.43	-9.83	1.29	V		0.086	19.32
		256-QAM	-31.88	27.37	-9.83	1.29	V		0.042	16.26

Freq (MHz)	Mod (Bandwidth)	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBd)	C.L	Pol	Limit W	ERP	
									W	dBm
668.0	LTE B71 (10 MHz)	QPSK	-27.16	32.56	-9.91	1.27	V	< 3.00	0.137	21.38
		16-QAM	-27.93	31.79	-9.91	1.27	V		0.115	20.61
		64-QAM	-29.04	30.68	-9.91	1.27	V		0.089	19.50
		256-QAM	-32.08	27.64	-9.91	1.27	V		0.044	16.46
680.5		QPSK	-26.39	33.04	-9.87	1.28	V		0.155	21.89
		16-QAM	-27.42	32.01	-9.87	1.28	V		0.122	20.86
		64-QAM	-28.51	30.92	-9.87	1.28	V		0.095	19.77
		256-QAM	-31.53	27.90	-9.87	1.28	V		0.047	16.75
693.0		QPSK	-26.63	32.50	-9.84	1.28	V		0.137	21.38
		16-QAM	-27.42	31.71	-9.84	1.28	V		0.115	20.59
		64-QAM	-28.49	30.64	-9.84	1.28	V		0.090	19.52
		256-QAM	-31.51	27.62	-9.84	1.28	V		0.045	16.50

Freq (MHz)	Mod (Bandwidth)	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBd)	C.L	Pol	Limit	ERP	
									W	W
670.5	LTE B71 (15 MHz)	QPSK	-27.00	32.63	-9.90	1.27	V	< 3.00	0.140	21.46
		16-QAM	-27.84	31.79	-9.90	1.27	V		0.116	20.62
		64-QAM	-28.92	30.71	-9.90	1.27	V		0.090	19.54
		256-QAM	-32.03	27.60	-9.90	1.27	V		0.044	16.43
680.5		QPSK	-26.77	32.66	-9.87	1.28	V		0.142	21.51
		16-QAM	-27.63	31.80	-9.87	1.28	V		0.116	20.65
		64-QAM	-28.70	30.73	-9.87	1.28	V		0.091	19.58
		256-QAM	-31.63	27.80	-9.87	1.28	V		0.046	16.65
690.5		QPSK	-26.73	32.45	-9.84	1.28	V		0.136	21.33
		16-QAM	-27.57	31.61	-9.84	1.28	V		0.112	20.49
		64-QAM	-28.62	30.56	-9.84	1.28	V		0.088	19.44
		256-QAM	-31.69	27.49	-9.84	1.28	V		0.043	16.37

Freq (MHz)	Mod (Bandwidth)	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBd)	C.L	Pol	Limit	ERP	
									W	W
673.0	LTE B71 (20 MHz)	QPSK	-26.88	32.72	-9.89	1.27	V	< 3.00	0.143	21.56
		16-QAM	-27.66	31.94	-9.89	1.27	V		0.120	20.78
		64-QAM	-28.70	30.90	-9.89	1.27	V		0.094	19.74
		256-QAM	-31.62	27.98	-9.89	1.27	V		0.048	16.82
680.5		QPSK	-26.88	32.55	-9.87	1.28	V		0.138	21.40
		16-QAM	-27.81	31.62	-9.87	1.28	V		0.112	20.47
		64-QAM	-28.88	30.55	-9.87	1.28	V		0.087	19.40
		256-QAM	-31.78	27.65	-9.87	1.28	V		0.045	16.50
688.0		QPSK	-26.40	32.90	-9.85	1.28	V		0.150	21.77
		16-QAM	-27.12	32.18	-9.85	1.28	V		0.127	21.05
		64-QAM	-28.24	31.06	-9.85	1.28	V		0.098	19.93
		256-QAM	-31.35	27.95	-9.85	1.28	V		0.048	16.82

8.2 RADIATED SPURIOUS EMISSIONS

- ▣ MODE: LTE B71
- ▣ MODULATION SIGNAL: 10 MHz QPSK
- ▣ DISTANCE: 3 meters

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Limit
133172 (668.0)	1 336.00	-52.62	7.27	-61.11	1.75	H	-55.59	-13.00
	2 004.00	-55.68	10.27	-62.73	2.24	H	-54.70	-13.00
	2 672.00	-56.02	10.74	-59.23	2.64	H	-51.13	-13.00
133297 (680.5)	1 361.00	-52.65	7.36	-61.23	1.82	H	-55.69	-13.00
	2 041.50	-56.01	10.06	-61.94	2.27	H	-54.15	-13.00
	2 722.00	-56.85	10.80	-59.97	2.64	V	-51.81	-13.00
133422 (693.0)	1 386.00	-52.64	7.51	-61.63	1.86	H	-55.97	-13.00
	2 079.00	-56.16	9.76	-61.07	2.32	V	-53.63	-13.00
	2 772.00	-56.31	10.80	-58.83	2.63	V	-50.66	-13.00

8.3 OCCUPIED BANDWIDTH

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (MHz)
71	5 MHz	680.5	QPSK	25	0	4.5211
			16-QAM			4.5004
			64-QAM			4.5066
			256-QAM			4.5107
	10 MHz		QPSK	50		8.9970
			16-QAM			8.9908
			64-QAM			8.9917
			256-QAM			8.9886
	15 MHz		QPSK	75		13.475
			16-QAM			13.489
			64-QAM			13.465
			256-QAM			13.457
	20 MHz		QPSK	100		17.961
			16-QAM			17.954
			64-QAM			17.910
			256-QAM			17.925

Note:

1. Plots of the EUT's Occupied Bandwidth are shown Page 39 ~ 54.

8.4 CONDUCTED SPURIOUS EMISSIONS

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
71	5	665.5	3.7034	27.976	-67.340	-39.364	-13.00
		680.5	3.6970	27.976	-67.384	-39.408	
		695.5	3.6785	27.976	-67.249	-39.273	
	10	668.0	3.6985	27.976	-67.100	-39.124	
		680.5	3.7199	27.976	-67.120	-39.144	
		693.0	3.7274	27.976	-66.937	-38.961	
	15	670.5	3.7015	27.976	-66.894	-38.918	
		680.5	3.7010	27.976	-67.192	-39.216	
		690.5	3.6905	27.976	-67.266	-39.290	
	20	673.0	3.7049	27.976	-67.126	-39.150	
		680.5	3.6820	27.976	-67.180	-39.204	
		688.0	3.6785	27.976	-67.111	-39.135	

Note:

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 79 ~ 90.
2. Conducted Spurious Emissions was Tested QPSK Modulation, Resource Block Size 1 and Resource Block Offset 0
3. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
4. Factor(dB) = Cable Loss + Attenuator + Power Splitter

Frequency Range (GHz)	Factor [dB]
0.03 – 1	25.270
1 – 5	27.976
5 – 10	28.591
10 – 15	29.116
15 – 20	29.489
Above 20(26.5)	30.131


8.5 BAND EDGE

- Plots of the EUT's Band Edge are shown Page 55 ~ 78.

8.6 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE


- ▣ MODE: LTE B71
- ▣ OPERATING FREQUENCY: 665,500,000 Hz
- ▣ CHANNEL: 133147 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	665 500 003	0.0	0.000 000	0.000
100 %		-30	665 500 006	3.0	0.000 000	0.005
100 %		-20	665 499 998	-5.1	-0.000 001	-0.008
100 %		-10	665 500 000	-3.1	0.000 000	-0.005
100 %		0	665 499 999	-3.7	-0.000 001	-0.006
100 %		+10	665 500 006	3.5	0.000 001	0.005
100 %		+30	665 499 999	-3.3	0.000 000	-0.005
100 %		+40	665 499 998	-4.4	-0.000 001	-0.007
100 %		+50	665 500 000	-2.5	0.000 000	-0.004
Batt. Endpoint		3.400	+20	665 499 999	-4.0	-0.000 001

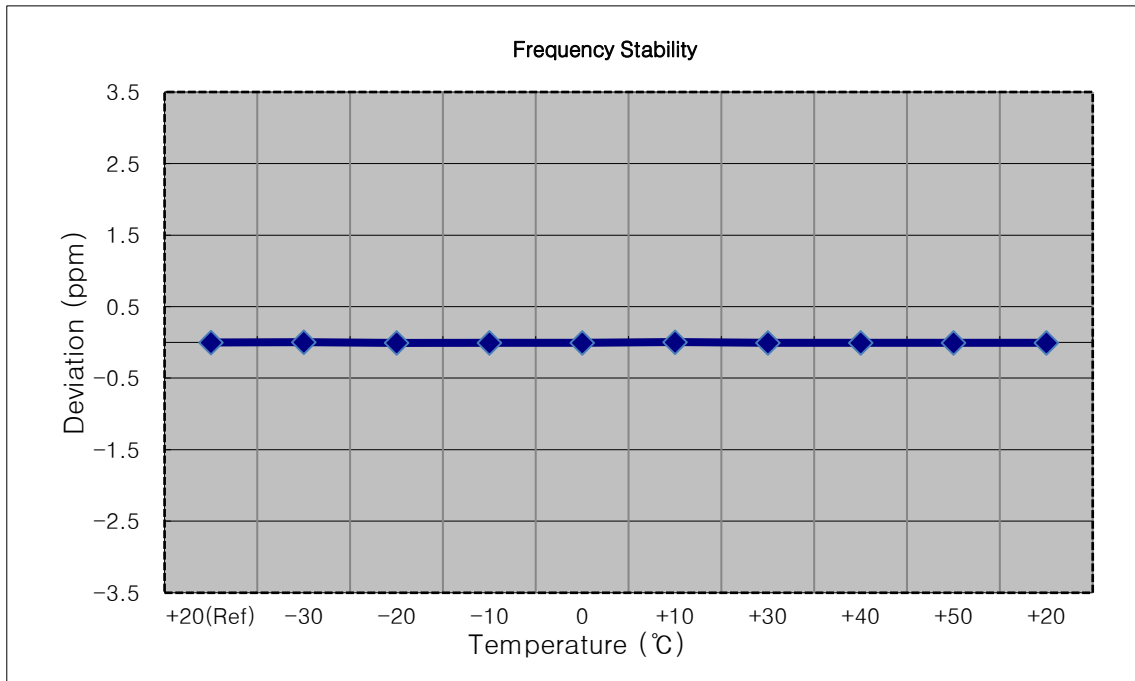


- ▣ MODE: LTE B71
- ▣ OPERATING FREQUENCY: 668,000,000 Hz
- ▣ CHANNEL: 133172 (10 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	667 999 998	0.0	0.000 000	0.000
100 %		-30	667 999 994	-4.2	-0.000 001	-0.006
100 %		-20	668 000 000	2.5	0.000 000	0.004
100 %		-10	667 999 995	-3.1	0.000 000	-0.005
100 %		0	668 000 000	2.0	0.000 000	0.003
100 %		+10	667 999 995	-3.1	0.000 000	-0.005
100 %		+30	667 999 995	-2.3	0.000 000	-0.003
100 %		+40	667 999 999	1.4	0.000 000	0.002
100 %		+50	668 000 001	2.9	0.000 000	0.004
Batt. Endpoint	3.400	+20	668 000 000	2.1	0.000 000	0.003

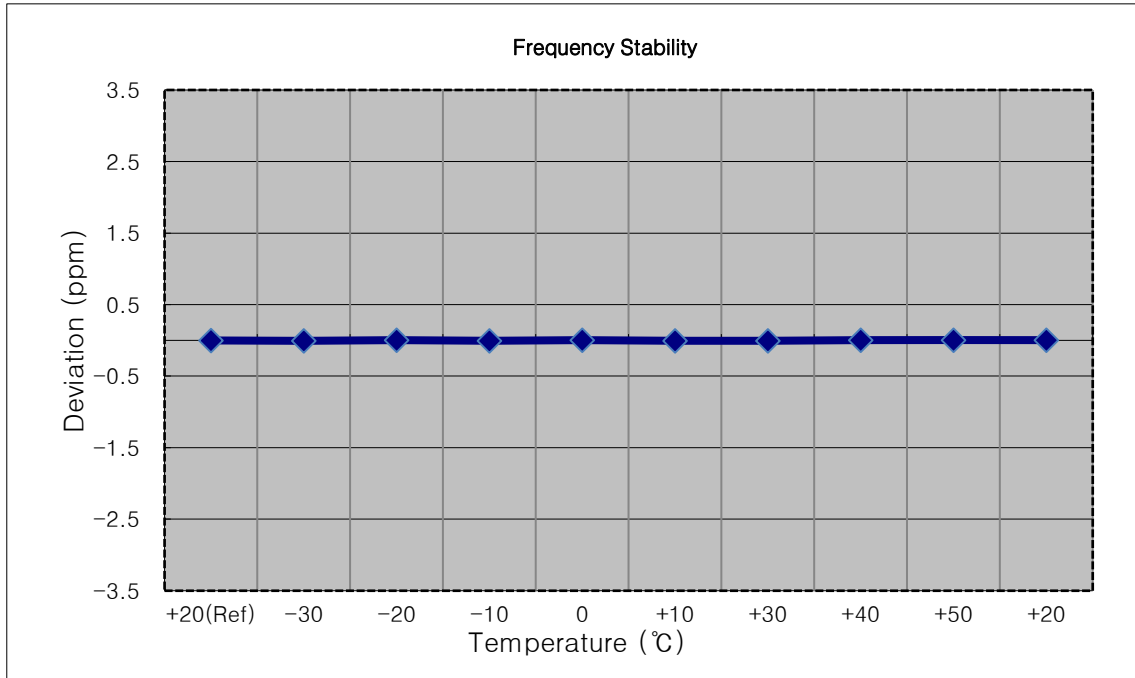


- ▣ MODE: LTE B71
- ▣ OPERATING FREQUENCY: 670,500,000 Hz
- ▣ CHANNEL: 133197 (15 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	670 500 003	0.0	0.000 000	0.000
100 %		-30	670 500 005	2.5	0.000 000	0.004
100 %		-20	670 499 999	-3.8	-0.000 001	-0.006
100 %		-10	670 499 999	-4.2	-0.000 001	-0.006
100 %		0	670 500 001	-1.9	0.000 000	-0.003
100 %		+10	670 499 998	-4.7	-0.000 001	-0.007
100 %		+30	670 499 998	-5.3	-0.000 001	-0.008
100 %		+40	670 500 001	-1.6	0.000 000	-0.002
100 %		+50	670 500 000	-3.3	0.000 000	-0.005
Batt. Endpoint	3.400	+20	670 499 999	-3.5	-0.000 001	-0.005

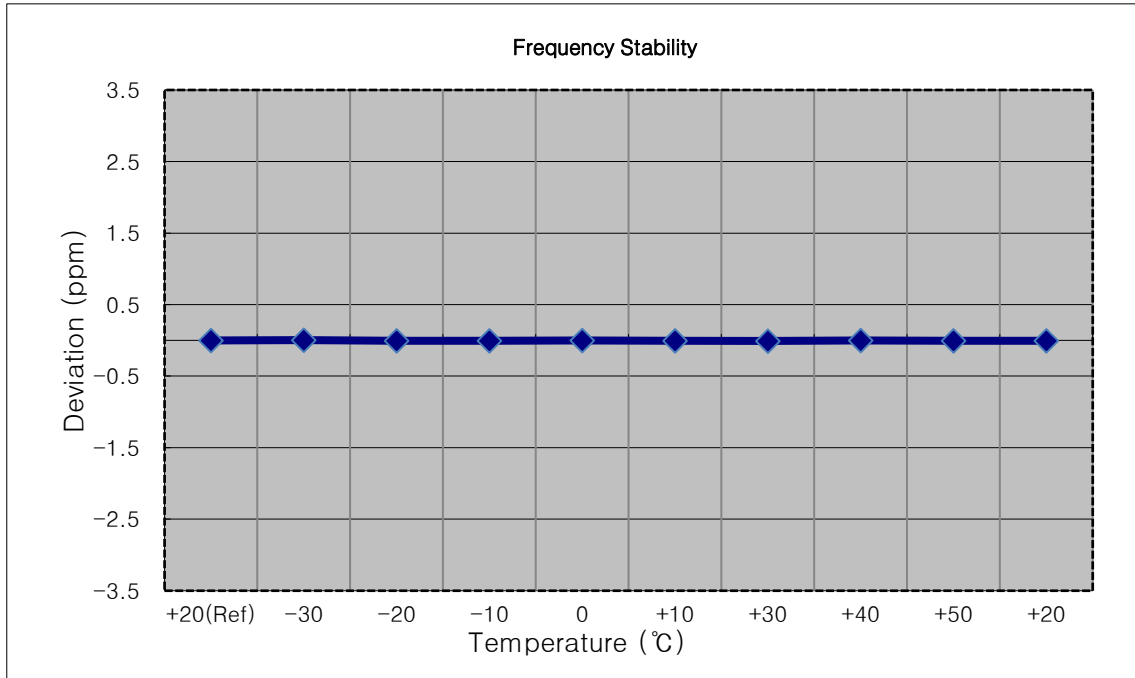


- ▣ MODE: LTE B71
- ▣ OPERATING FREQUENCY: 673,000,000 Hz
- ▣ CHANNEL: 133222 (20 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	673 000 002	0.0	0.000 000	0.000
100 %		-30	672 999 998	-3.8	-0.000 001	-0.006
100 %		-20	673 000 003	1.5	0.000 000	0.002
100 %		-10	672 999 999	-3.1	0.000 000	-0.005
100 %		0	672 999 998	-3.8	-0.000 001	-0.006
100 %		+10	672 999 998	-4.1	-0.000 001	-0.006
100 %		+30	673 000 003	1.5	0.000 000	0.002
100 %		+40	673 000 001	-1.1	0.000 000	-0.002
100 %		+50	672 999 998	-3.5	-0.000 001	-0.005
Batt. Endpoint	3.400	+20	673 000 004	2.3	0.000 000	0.003

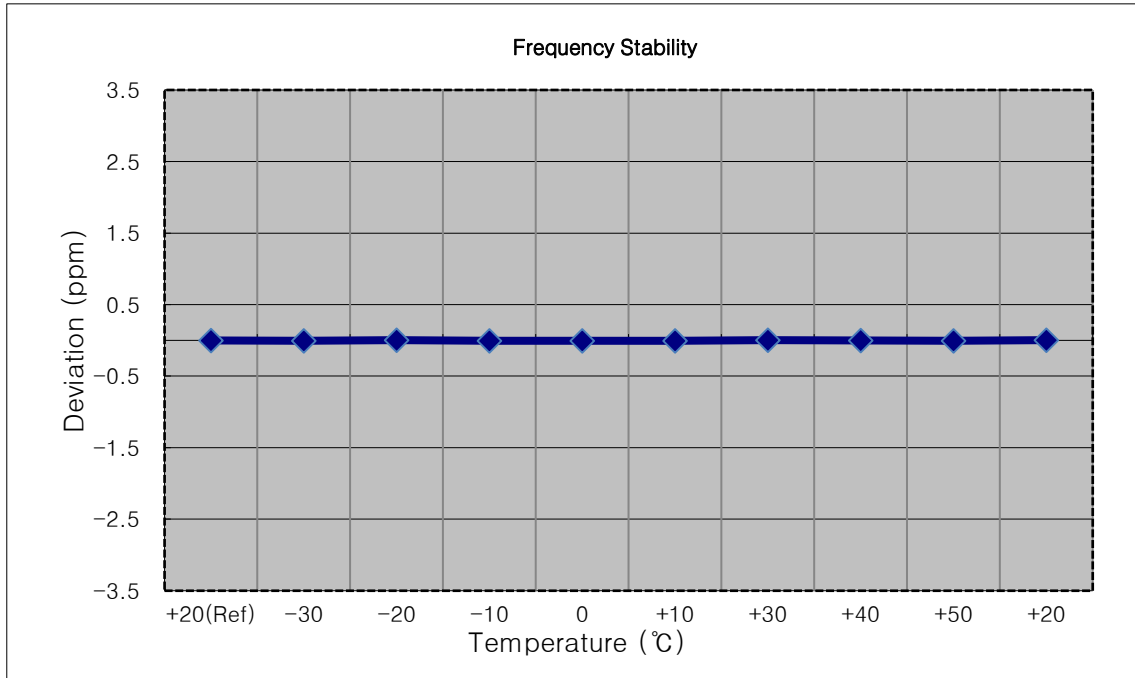


- ▣ MODE: LTE B71
- ▣ OPERATING FREQUENCY: 680,500,000 Hz
- ▣ CHANNEL: 133297 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	680 499 998	0.0	0.000 000	0.000
100 %		-30	680 500 003	4.5	0.000 001	0.007
100 %		-20	680 499 994	-4.1	-0.000 001	-0.006
100 %		-10	680 499 996	-2.2	0.000 000	-0.003
100 %		0	680 500 001	2.3	0.000 000	0.003
100 %		+10	680 499 996	-2.5	0.000 000	-0.004
100 %		+30	680 499 995	-3.8	-0.000 001	-0.006
100 %		+40	680 499 995	-3.4	0.000 000	-0.005
100 %		+50	680 499 995	-3.3	0.000 000	-0.005
Batt. Endpoint	3.400	+20	680 499 993	-5.6	-0.000 001	-0.008

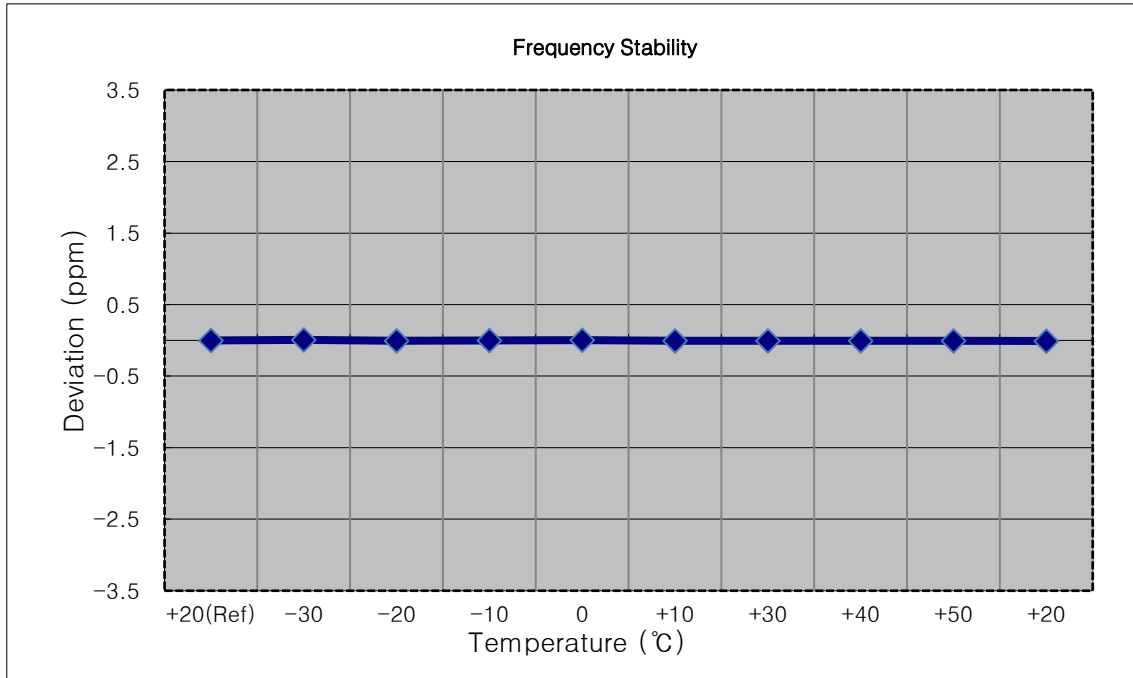


- ▣ MODE: LTE B71
- ▣ OPERATING FREQUENCY: 680,500,000 Hz
- ▣ CHANNEL: 133297 (10 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	680 499 998	0.0	0.000 000	0.000
100 %		-30	680 499 995	-2.7	0.000 000	-0.004
100 %		-20	680 499 996	-1.8	0.000 000	-0.003
100 %		-10	680 500 003	4.5	0.000 001	0.007
100 %		0	680 500 000	2.2	0.000 000	0.003
100 %		+10	680 500 001	3.3	0.000 000	0.005
100 %		+30	680 499 997	-1.1	0.000 000	-0.002
100 %		+40	680 499 996	-2.5	0.000 000	-0.004
100 %		+50	680 499 996	-2.1	0.000 000	-0.003
Batt. Endpoint	3.400	+20	680 499 996	-1.9	0.000 000	-0.003

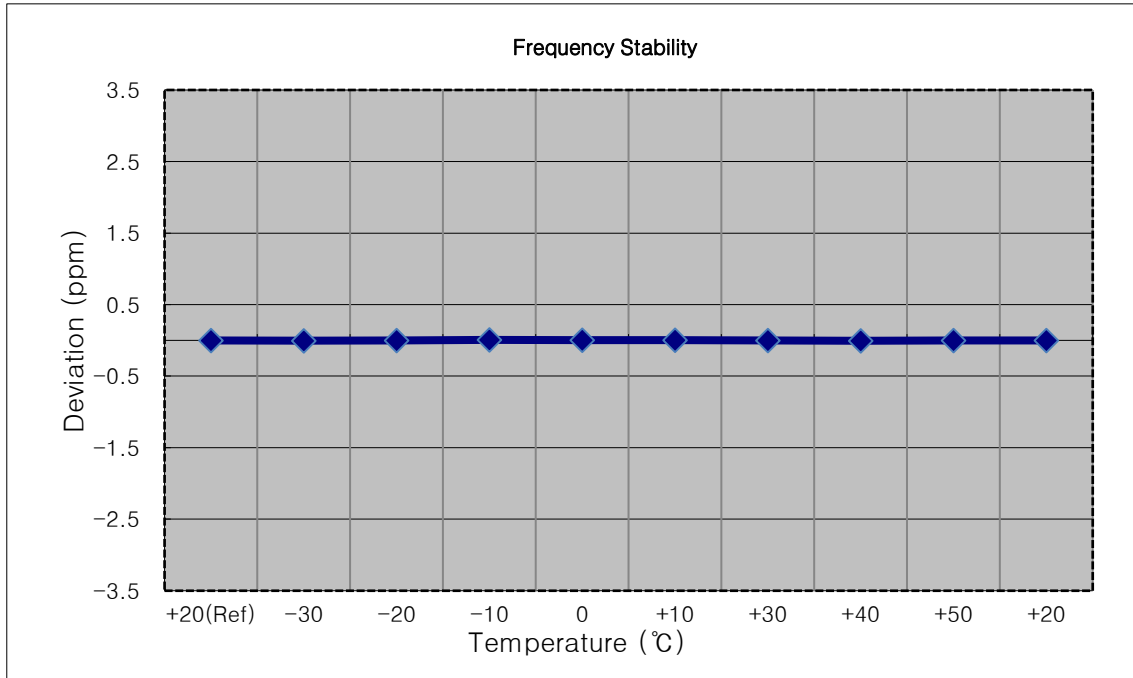


- ▣ MODE: LTE B71
- ▣ OPERATING FREQUENCY: 680,500,000 Hz
- ▣ CHANNEL: 133297 (15 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	680 499 998	0.0	0.000 000	0.000
100 %		-30	680 500 001	3.4	0.000 000	0.005
100 %		-20	680 500 000	2.2	0.000 000	0.003
100 %		-10	680 499 995	-3.0	0.000 000	-0.004
100 %		0	680 499 996	-2.1	0.000 000	-0.003
100 %		+10	680 499 996	-1.8	0.000 000	-0.003
100 %		+30	680 499 995	-3.2	0.000 000	-0.005
100 %		+40	680 499 996	-1.9	0.000 000	-0.003
100 %		+50	680 499 996	-2.2	0.000 000	-0.003
Batt. Endpoint	3.400	+20	680 499 995	-2.6	0.000 000	-0.004

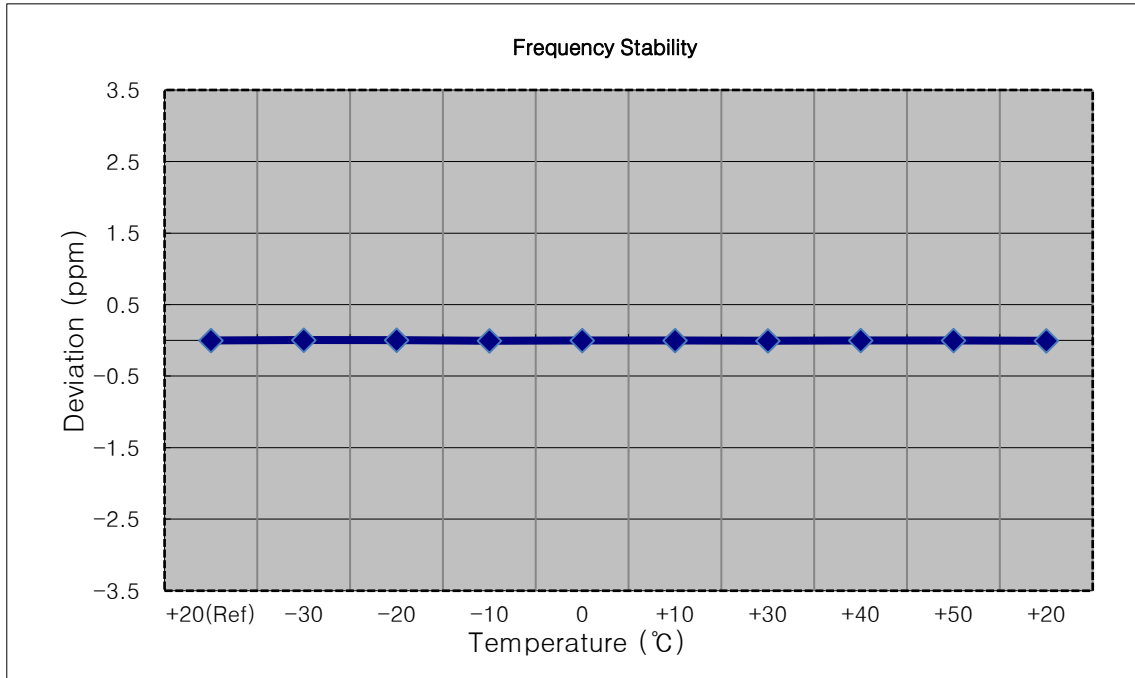


- ▣ MODE: LTE B71
- ▣ OPERATING FREQUENCY: 680,500,000 Hz
- ▣ CHANNEL: 133297 (20 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	680 499 997	0.0	0.000 000	0.000
100 %		-30	680 499 994	-2.7	0.000 000	-0.004
100 %		-20	680 499 995	-2.2	0.000 000	-0.003
100 %		-10	680 499 995	-2.1	0.000 000	-0.003
100 %		0	680 499 994	-3.2	0.000 000	-0.005
100 %		+10	680 499 993	-3.5	-0.000 001	-0.005
100 %		+30	680 499 994	-3.2	0.000 000	-0.005
100 %		+40	680 500 001	3.8	0.000 001	0.006
100 %		+50	680 499 995	-2.4	0.000 000	-0.004
Batt. Endpoint	3.400	+20	680 499 995	-1.6	0.000 000	-0.002

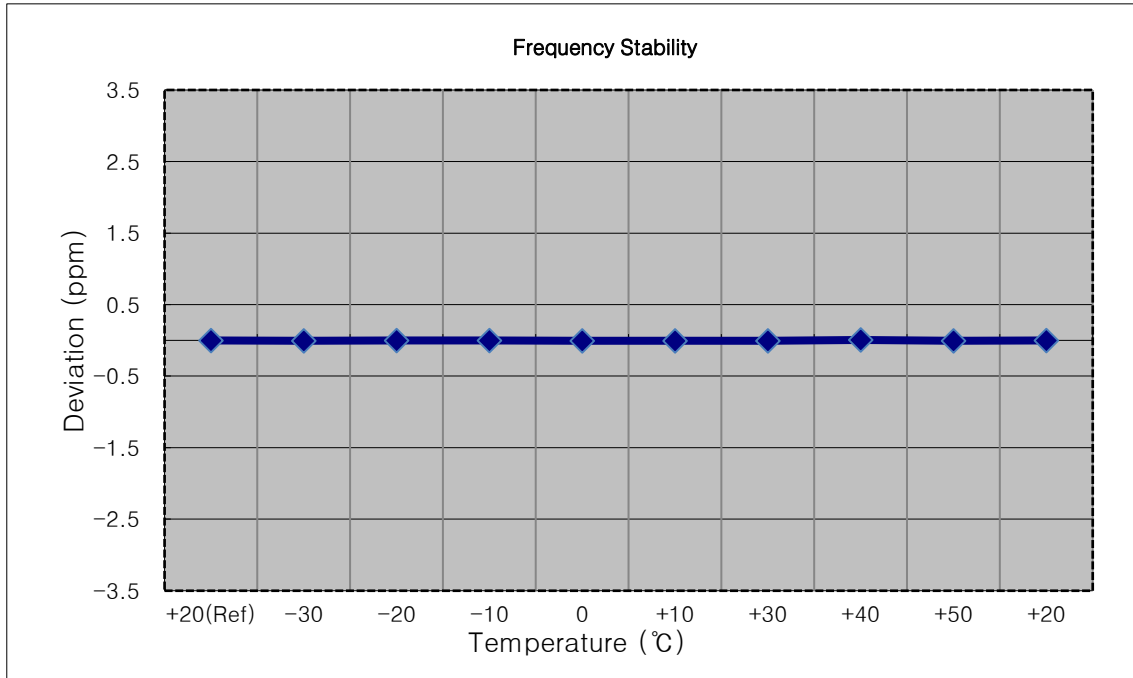


- ▣ MODE: LTE B71
- ▣ OPERATING FREQUENCY: 695,500,000 Hz
- ▣ CHANNEL: 133447 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	695 499 998	0.0	0.000 000	0.000
100 %		-30	695 500 001	2.5	0.000 000	0.004
100 %		-20	695 499 995	-3.4	0.000 000	-0.005
100 %		-10	695 499 995	-2.8	0.000 000	-0.004
100 %		0	695 499 995	-3.3	0.000 000	-0.005
100 %		+10	695 500 001	3.0	0.000 000	0.004
100 %		+30	695 500 000	2.3	0.000 000	0.003
100 %		+40	695 499 995	-3.4	0.000 000	-0.005
100 %		+50	695 499 993	-5.4	-0.000 001	-0.008
Batt. Endpoint	3.400	+20	695 499 994	-3.7	-0.000 001	-0.005

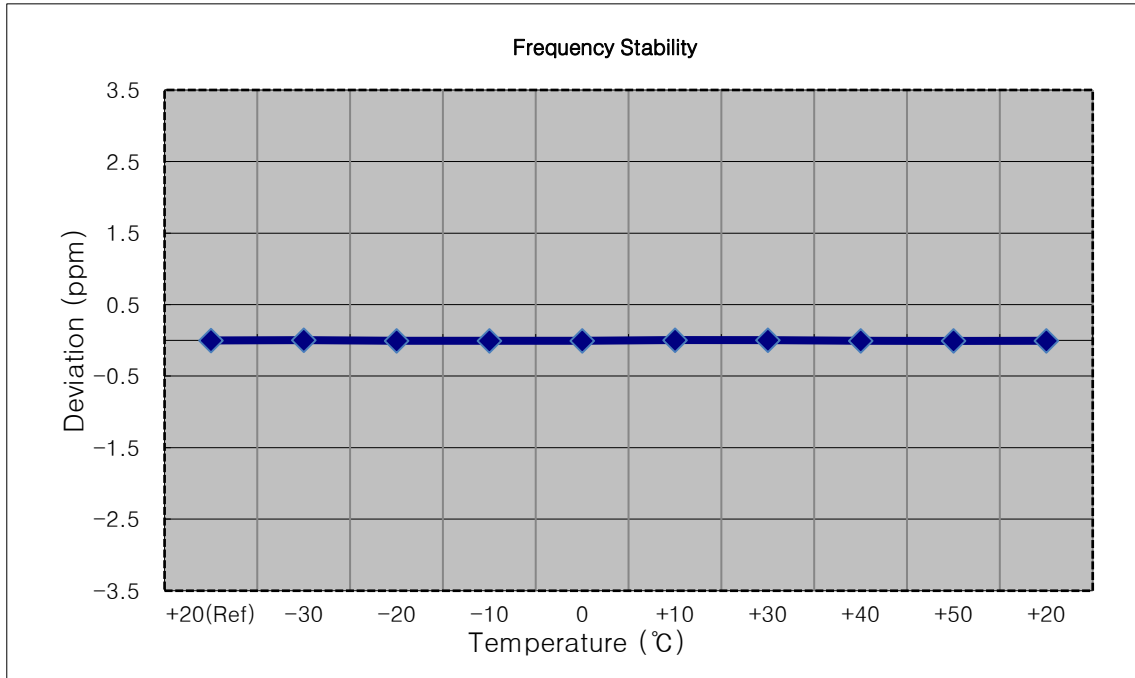


- ▣ MODE: LTE B71
- ▣ OPERATING FREQUENCY: 693,000,000 Hz
- ▣ CHANNEL: 133422 (10 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	692 999 998	0.0	0.000 000	0.000
100 %		-30	693 000 001	3.0	0.000 000	0.004
100 %		-20	692 999 996	-1.6	0.000 000	-0.002
100 %		-10	692 999 996	-1.9	0.000 000	-0.003
100 %		0	693 000 000	2.2	0.000 000	0.003
100 %		+10	692 999 995	-2.6	0.000 000	-0.004
100 %		+30	692 999 995	-3.4	0.000 000	-0.005
100 %		+40	693 000 001	2.9	0.000 000	0.004
100 %		+50	692 999 994	-3.8	-0.000 001	-0.005
Batt. Endpoint	3.400	+20	692 999 997	-1.3	0.000 000	-0.002

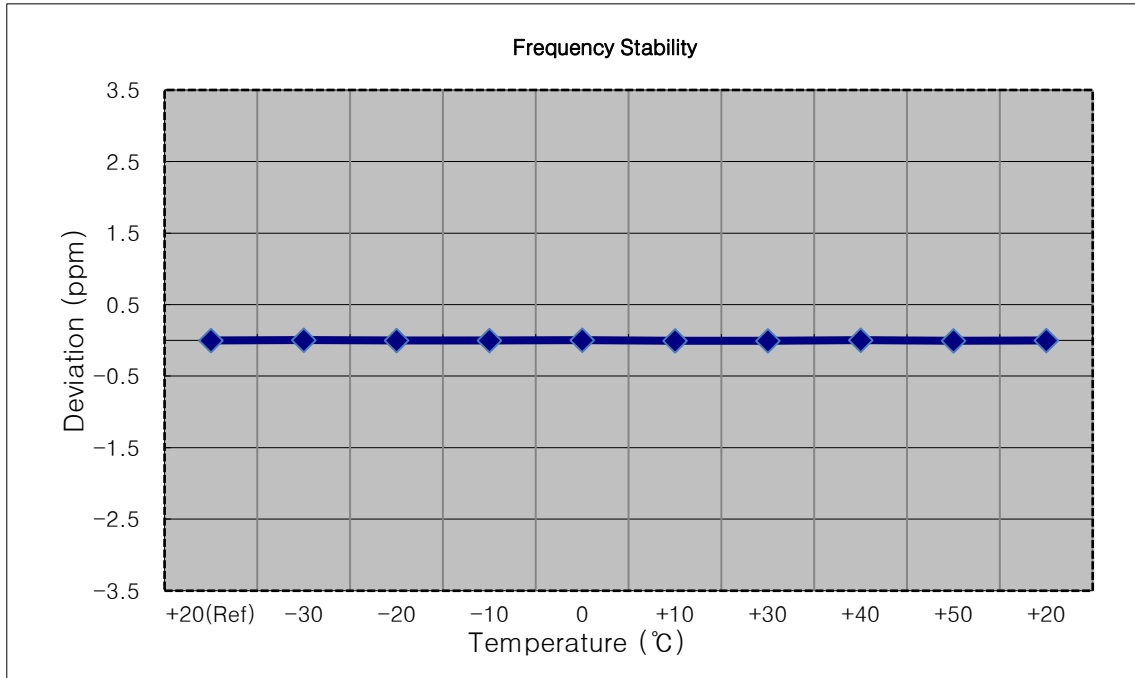


- ▣ MODE: LTE B71
- ▣ OPERATING FREQUENCY: 690,500,000 Hz
- ▣ CHANNEL: 133397 (15 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	690 499 998	0.0	0.000 000	0.000
100 %		-30	690 499 995	-2.4	0.000 000	-0.003
100 %		-20	690 499 995	-2.5	0.000 000	-0.004
100 %		-10	690 500 000	2.0	0.000 000	0.003
100 %		0	690 499 996	-2.2	0.000 000	-0.003
100 %		+10	690 499 995	-2.8	0.000 000	-0.004
100 %		+30	690 499 996	-1.3	0.000 000	-0.002
100 %		+40	690 499 996	-2.1	0.000 000	-0.003
100 %		+50	690 499 996	-1.6	0.000 000	-0.002
Batt. Endpoint	3.400	+20	690 500 000	2.5	0.000 000	0.004

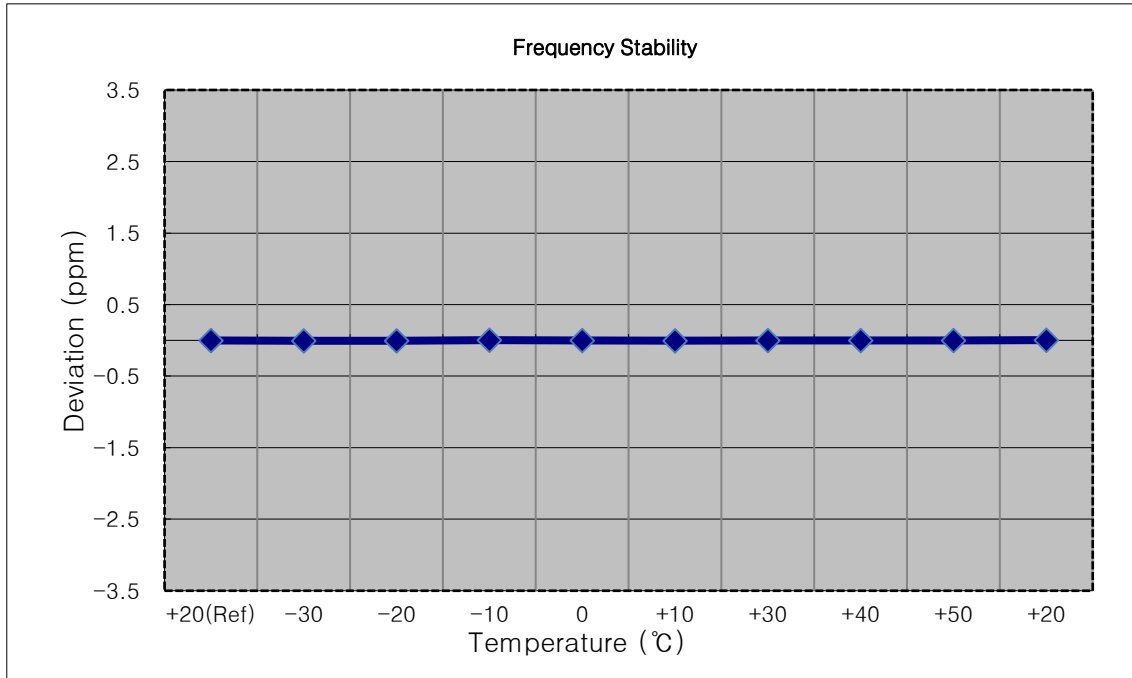


- ▣ MODE: LTE B71
- ▣ OPERATING FREQUENCY: 688,000,000 Hz
- ▣ CHANNEL: 133372 (20 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	687 999 997	0.0	0.000 000	0.000
100 %		-30	687 999 994	-3.0	0.000 000	-0.004
100 %		-20	687 999 998	1.3	0.000 000	0.002
100 %		-10	687 999 994	-2.4	0.000 000	-0.003
100 %		0	687 999 995	-1.8	0.000 000	-0.003
100 %		+10	687 999 998	1.8	0.000 000	0.003
100 %		+30	687 999 995	-1.7	0.000 000	-0.002
100 %		+40	687 999 994	-2.6	0.000 000	-0.004
100 %		+50	687 999 999	2.5	0.000 000	0.004
Batt. Endpoint	3.400	+20	687 999 994	-2.3	0.000 000	-0.003

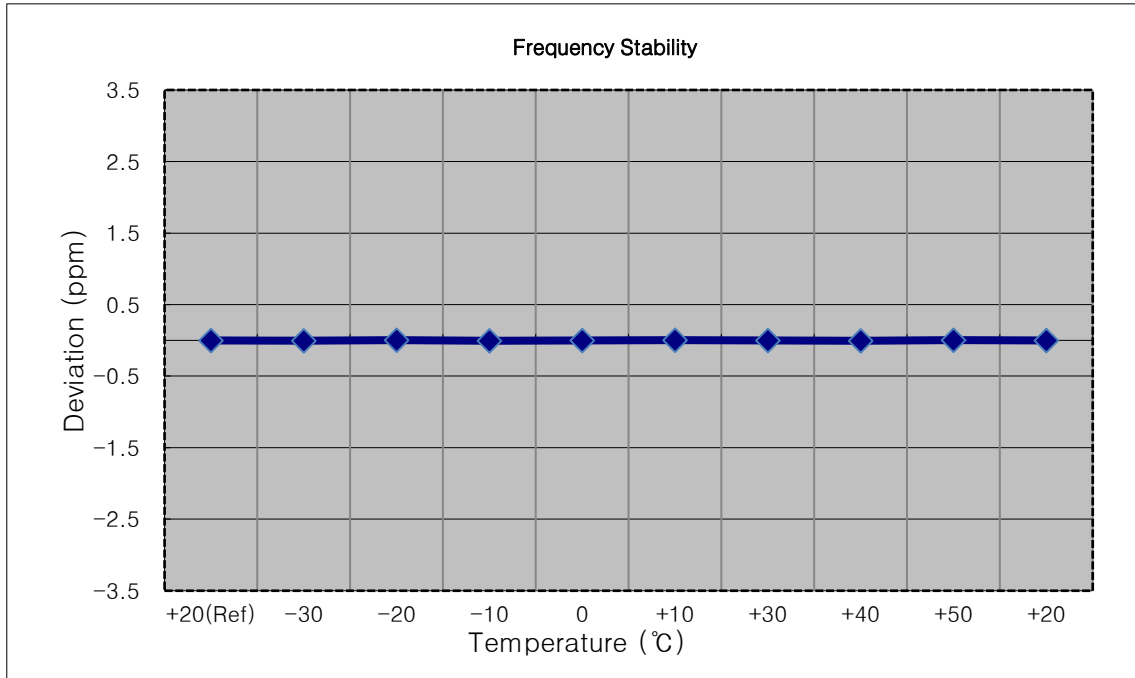


9. TEST PLOTS


BAND 71. Occupied Bandwidth Plot (5M BW Ch.133297 QPSK_RB6_0)

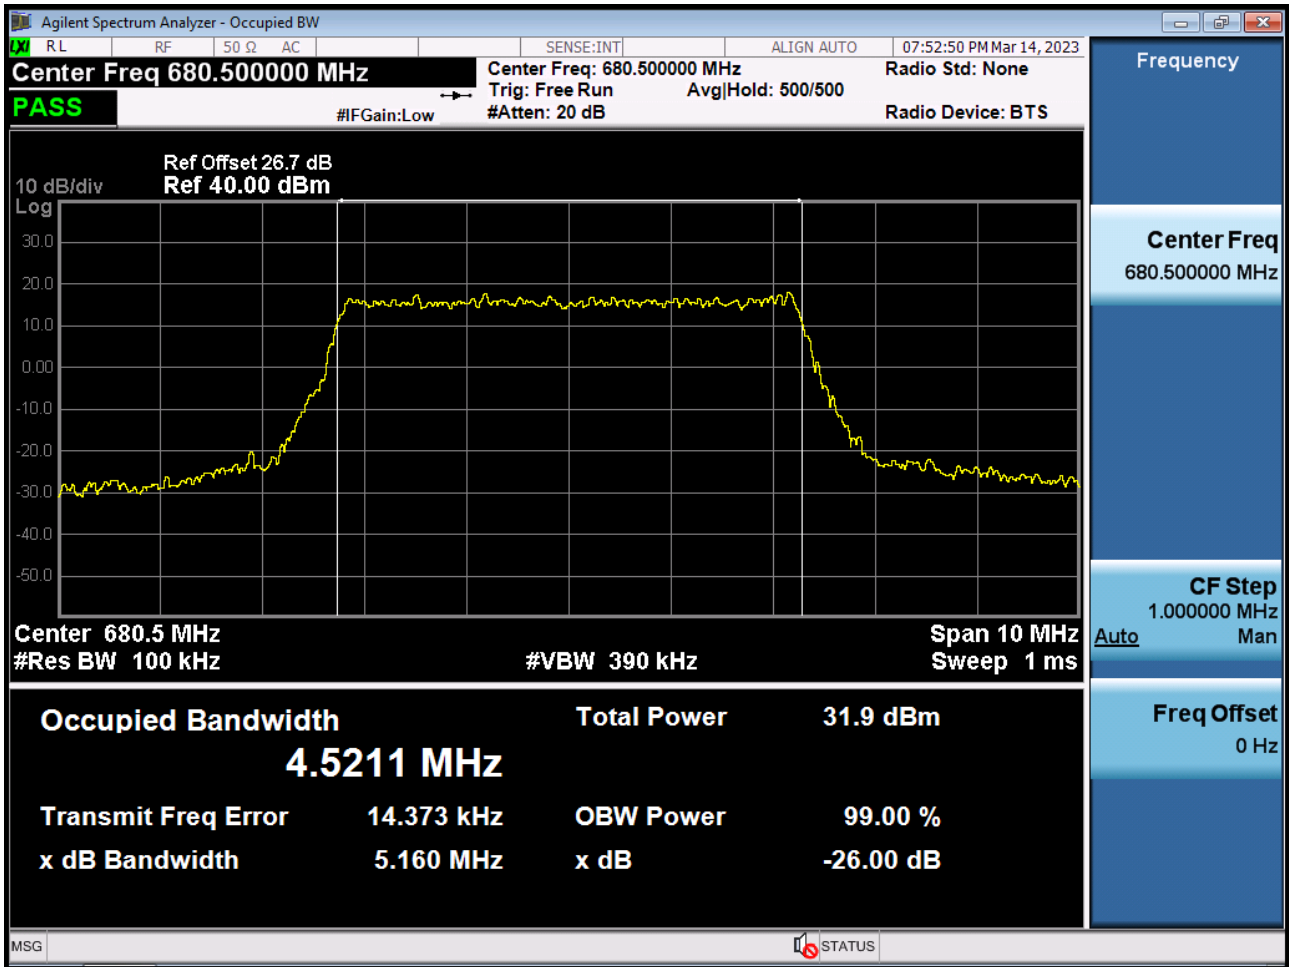


BAND 71. Occupied Bandwidth Plot (5M BW Ch.133297 16QAM_RB6_0)

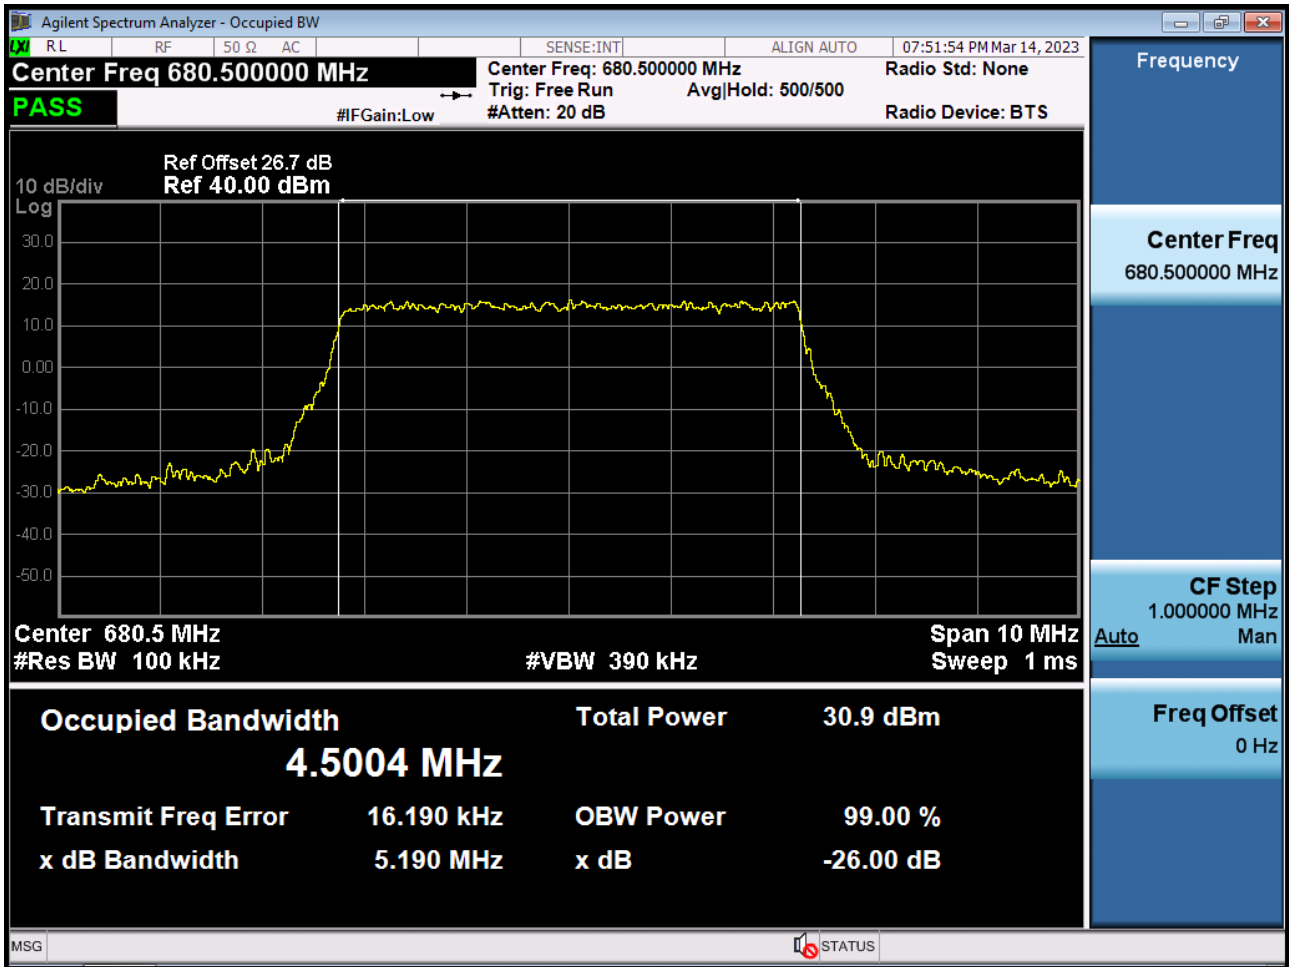


BAND 71. Occupied Bandwidth Plot (5M BW Ch.133297 64QAM_RB6_0)

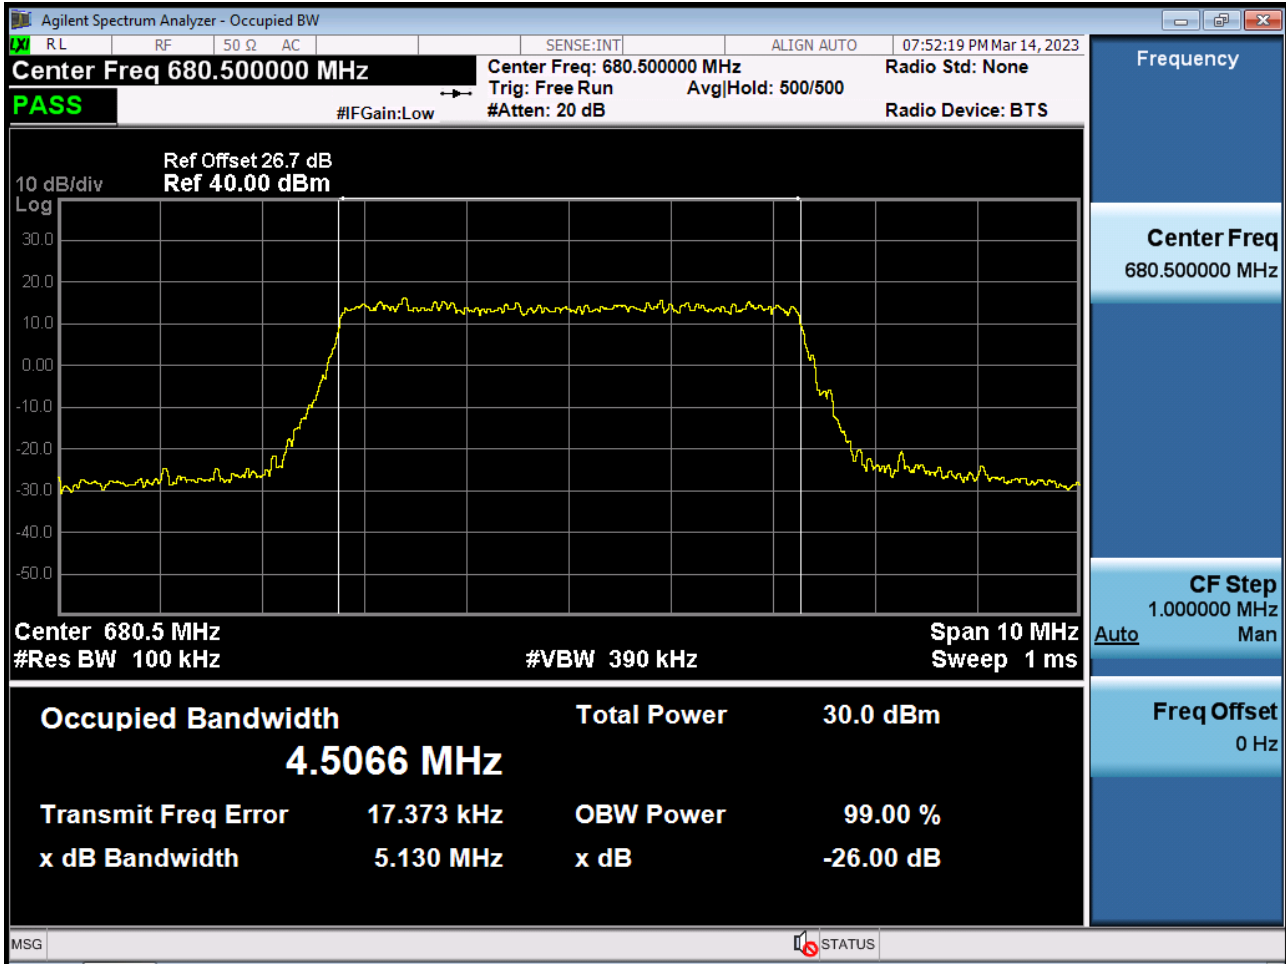


BAND 71. Occupied Bandwidth Plot (5M BW Ch.133297 256QAM_RB6_0)

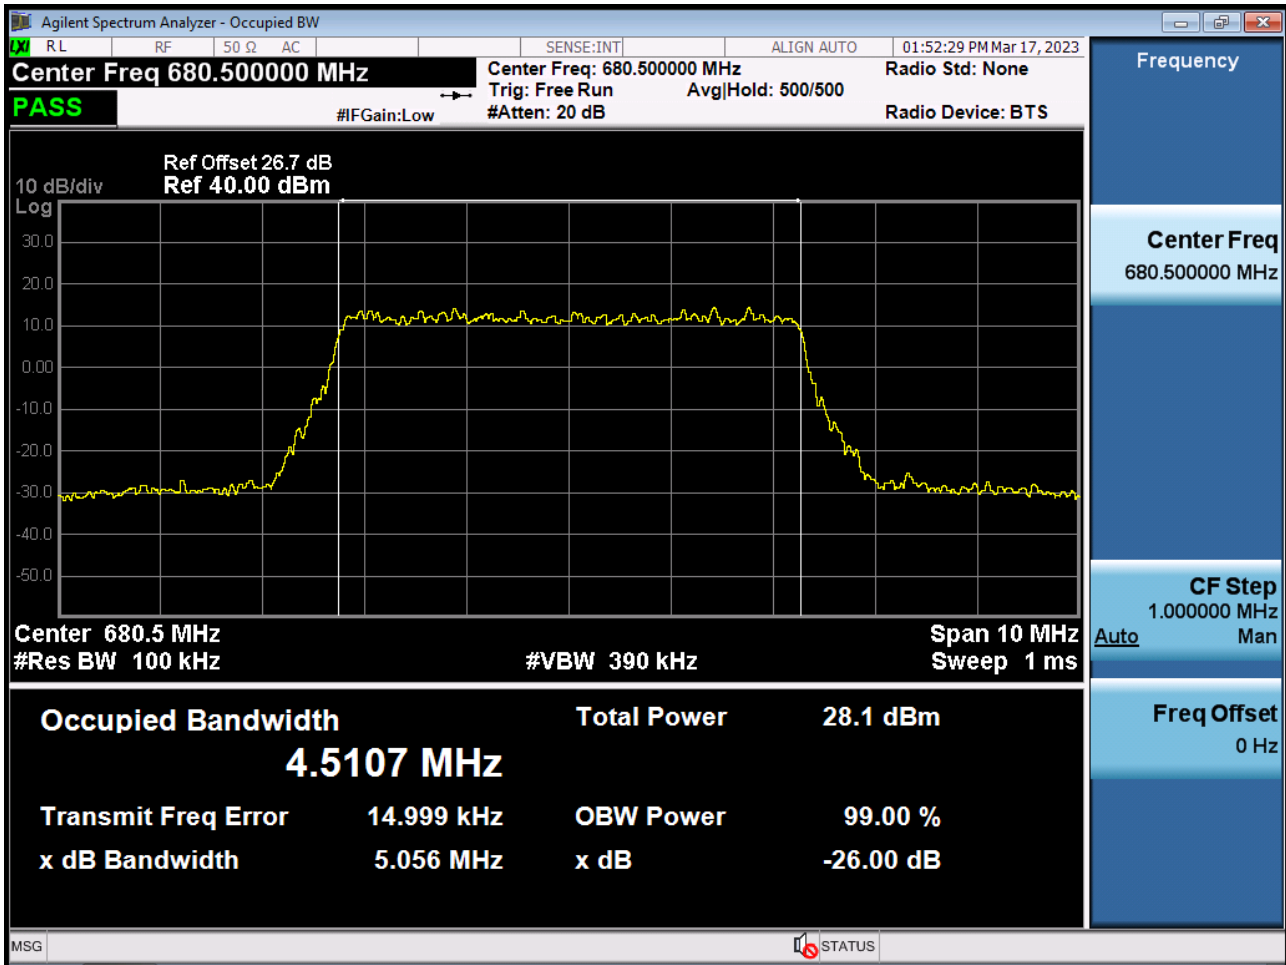


BAND 71. Occupied Bandwidth Plot (10M BW Ch.133297 QPSK_RB15_0)

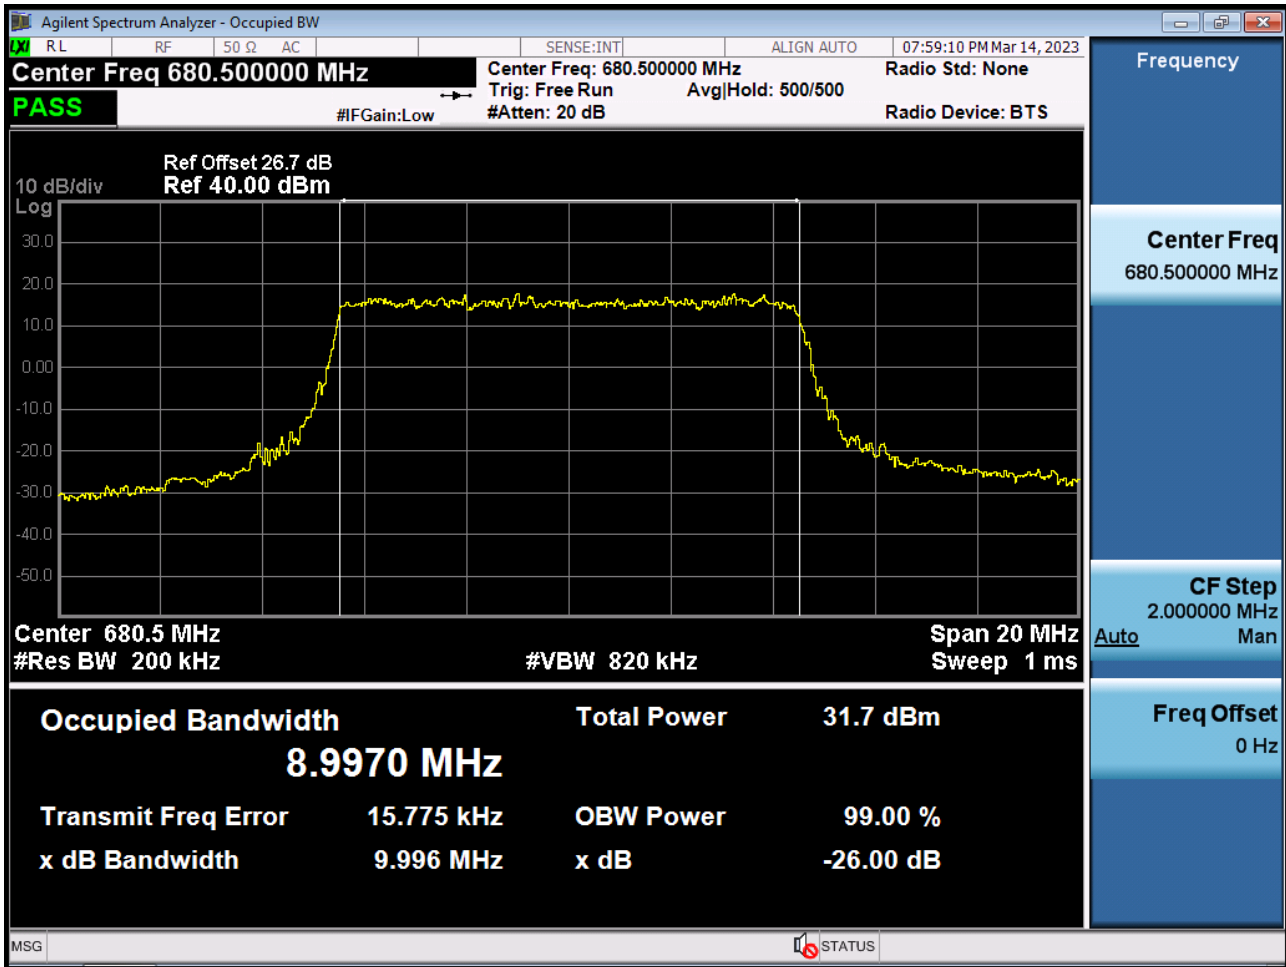


BAND 71. Occupied Bandwidth Plot (10M BW Ch.133297 16QAM_RB15_0)

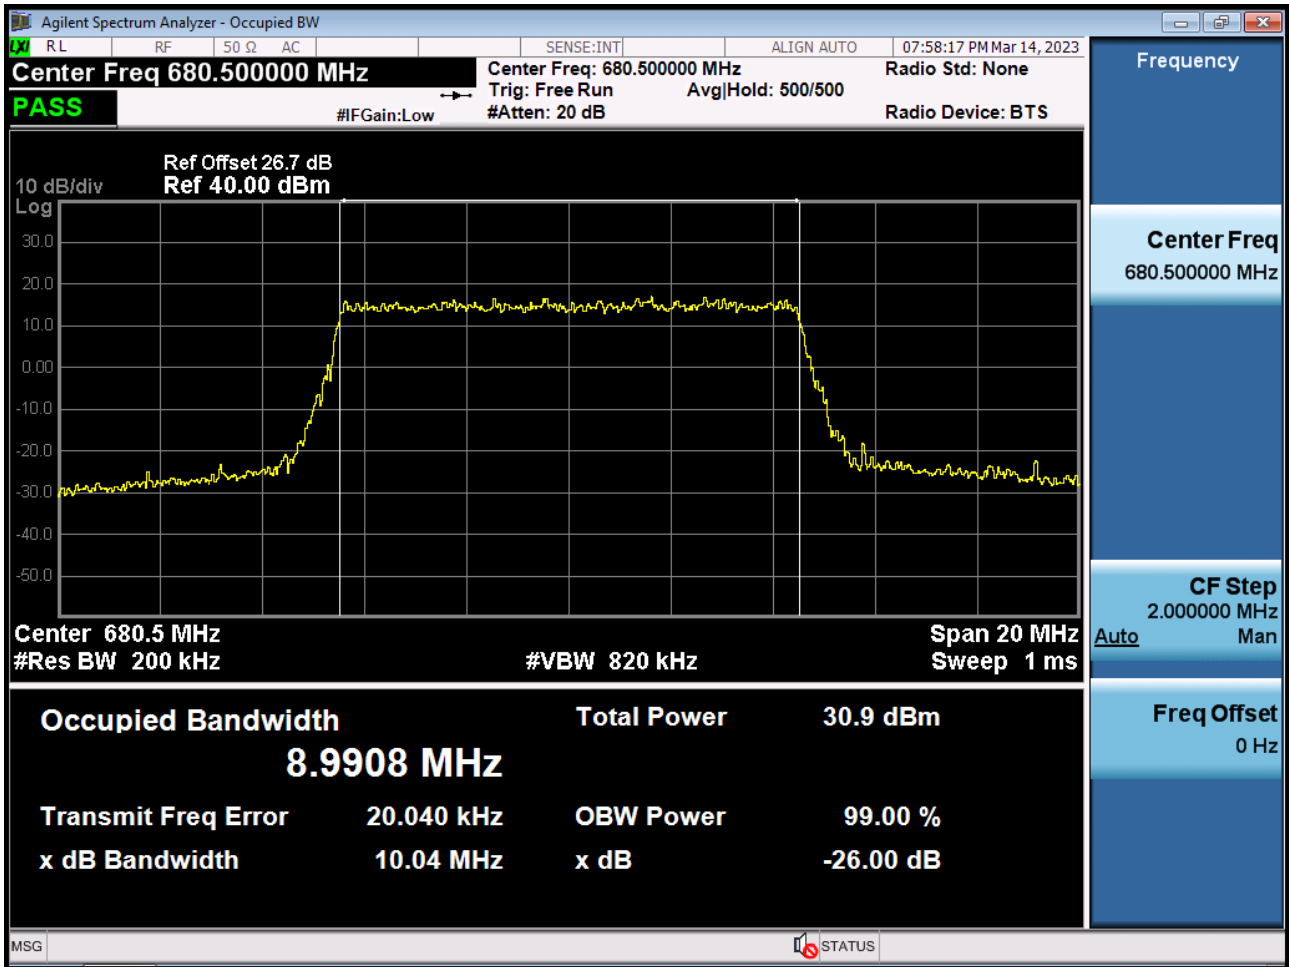


BAND 71. Occupied Bandwidth Plot (10M BW Ch.133297 64QAM_RB15_0)

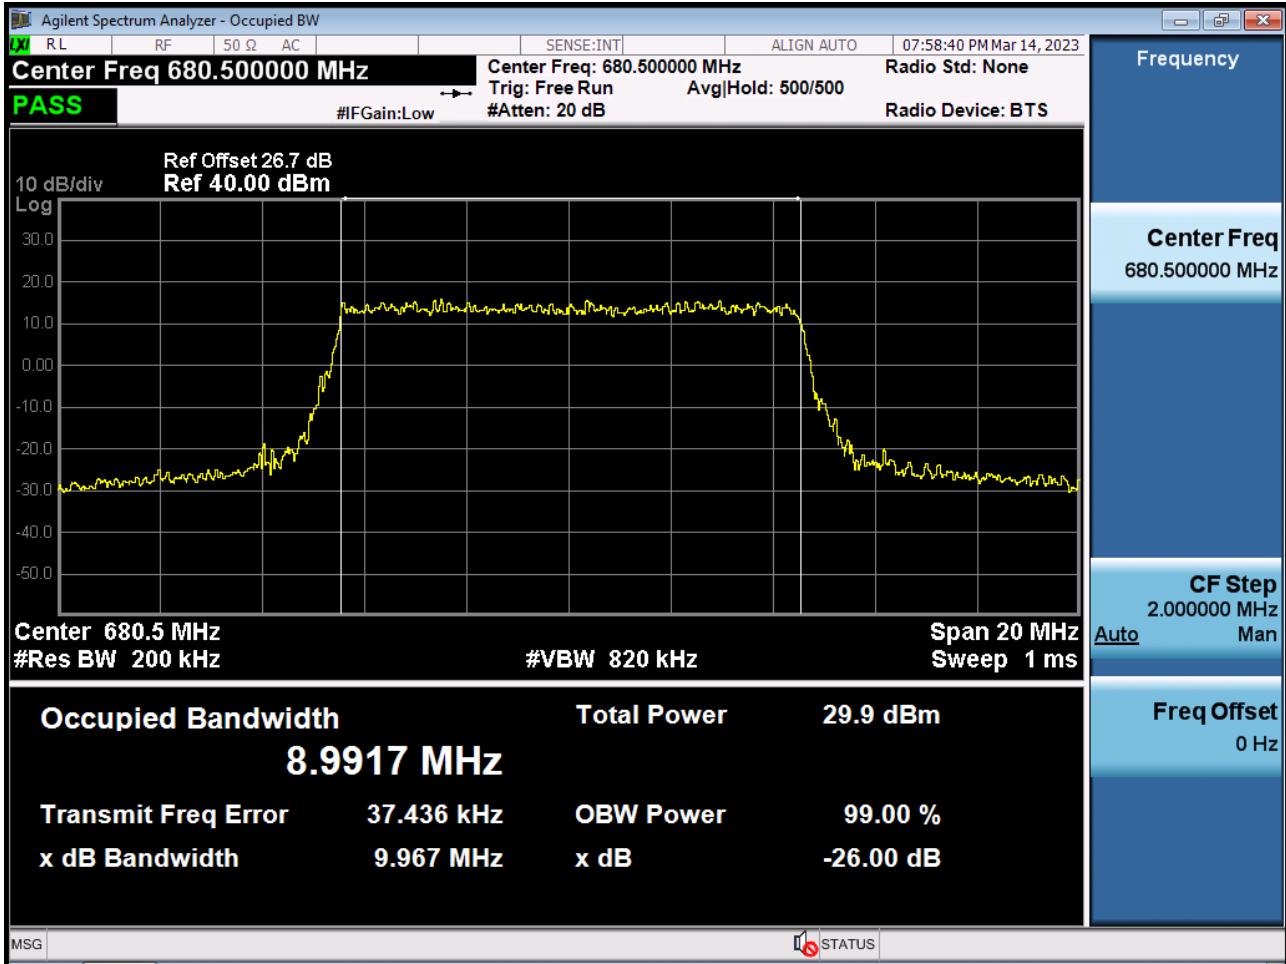


BAND 71. Occupied Bandwidth Plot (10M BW Ch.133297 256QAM_RB15_0)

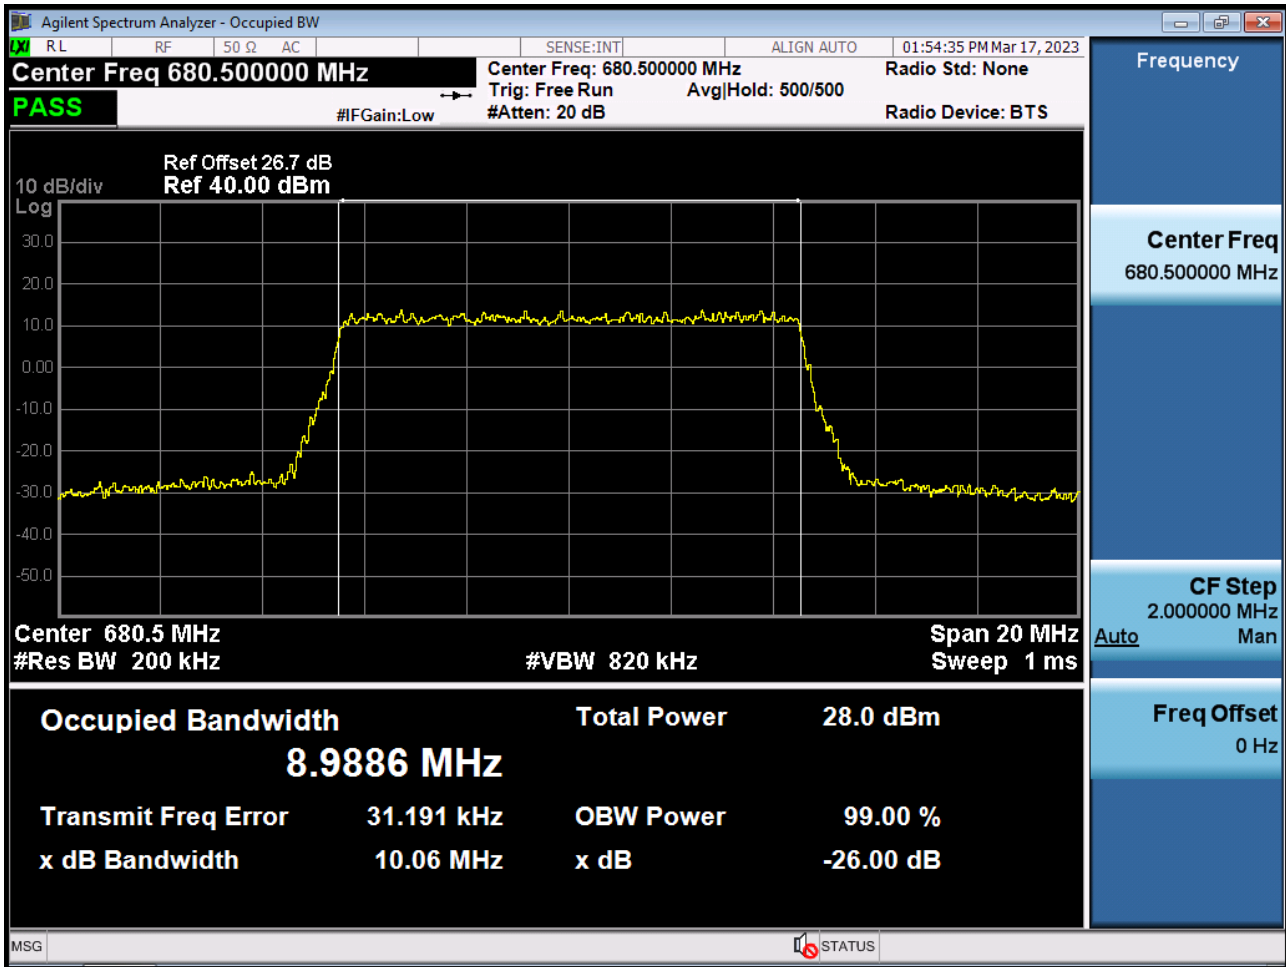


BAND 71. Occupied Bandwidth Plot (15M BW Ch.133297 QPSK_RB25_0)

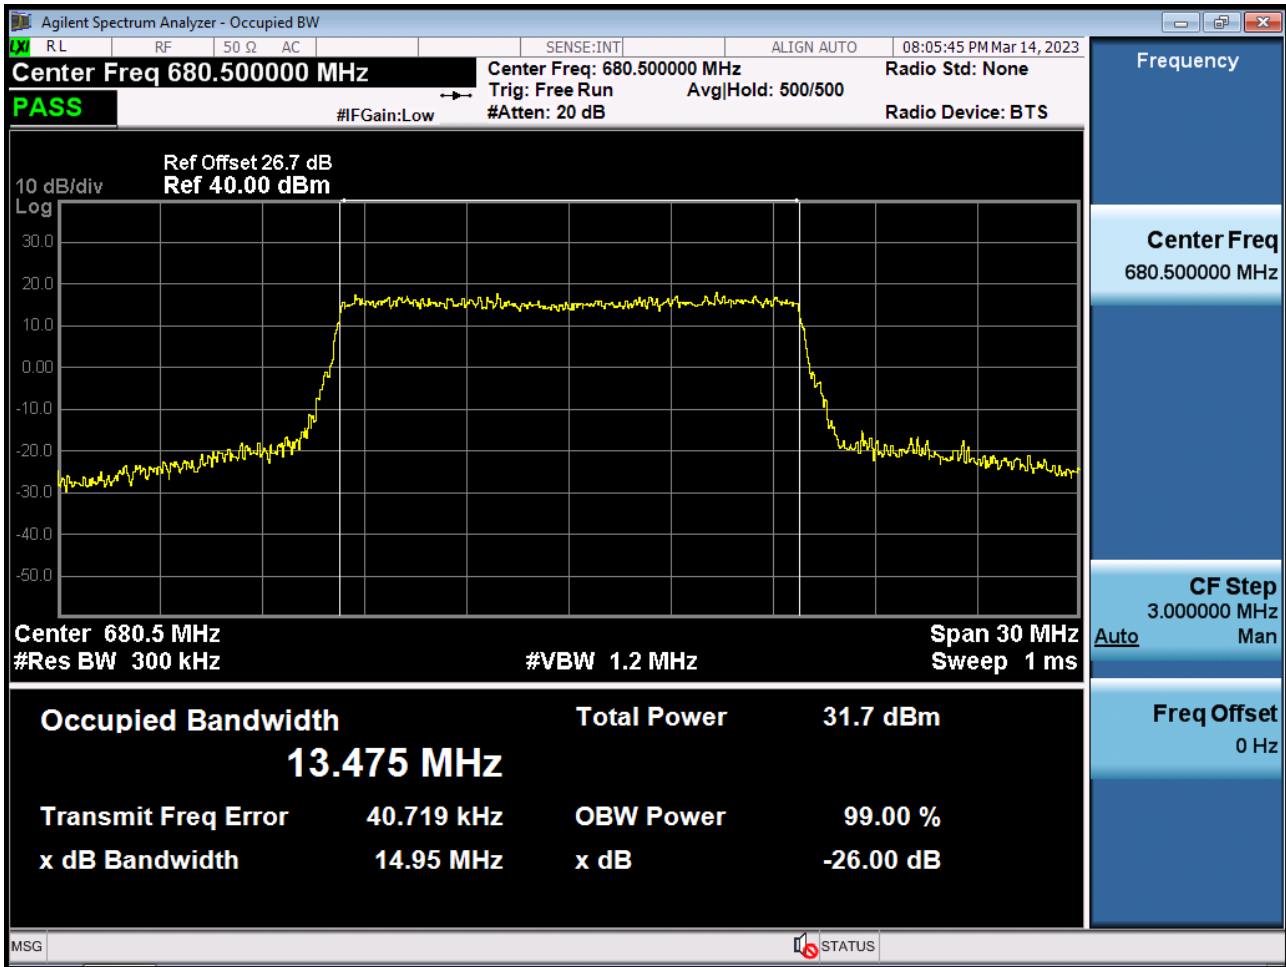


BAND 71. Occupied Bandwidth Plot (15M BW Ch.133297 16QAM_RB25_0)

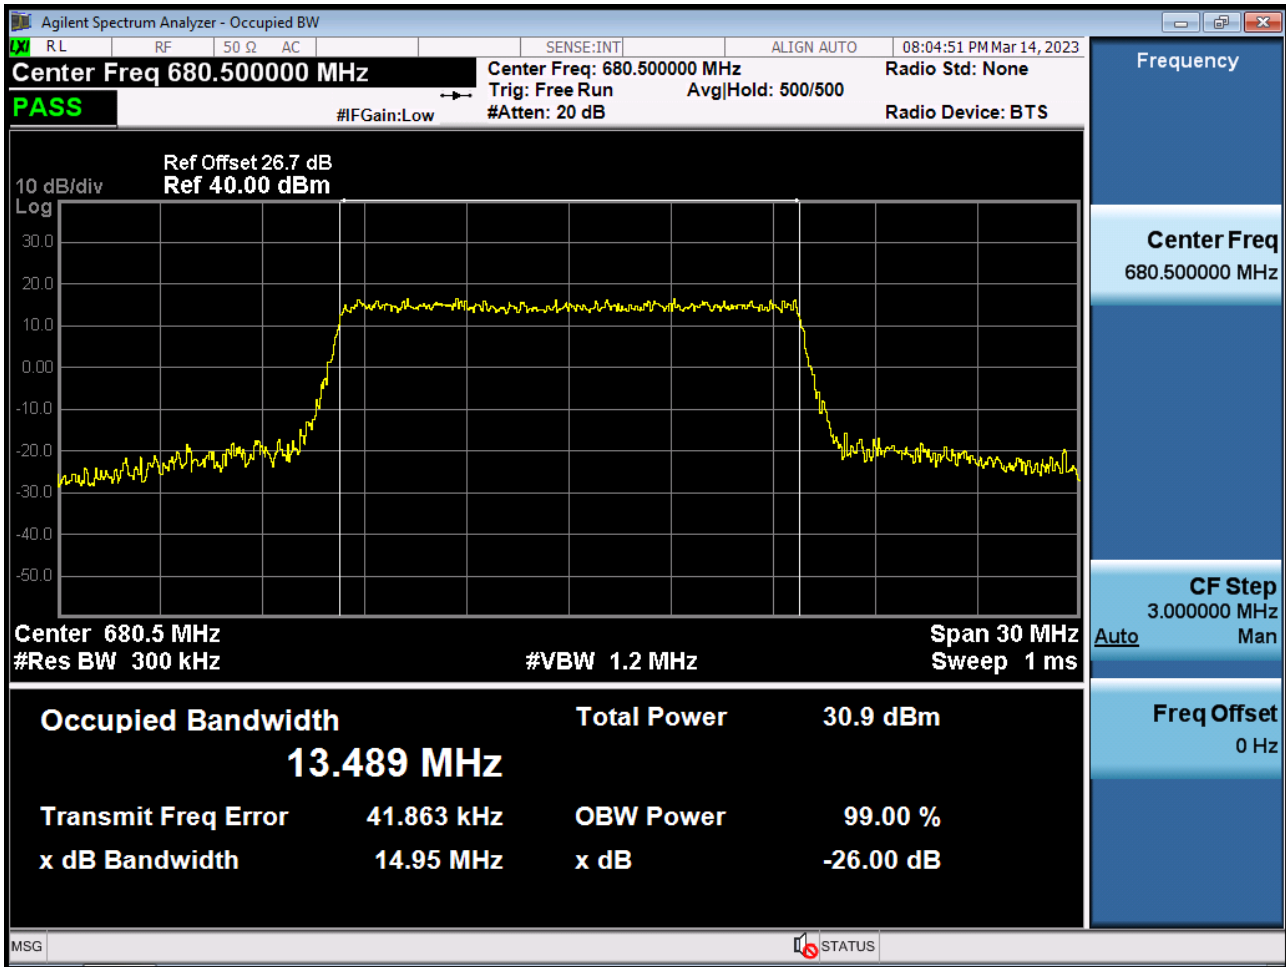


BAND 71. Occupied Bandwidth Plot (15M BW Ch.133297 64QAM_RB25_0)

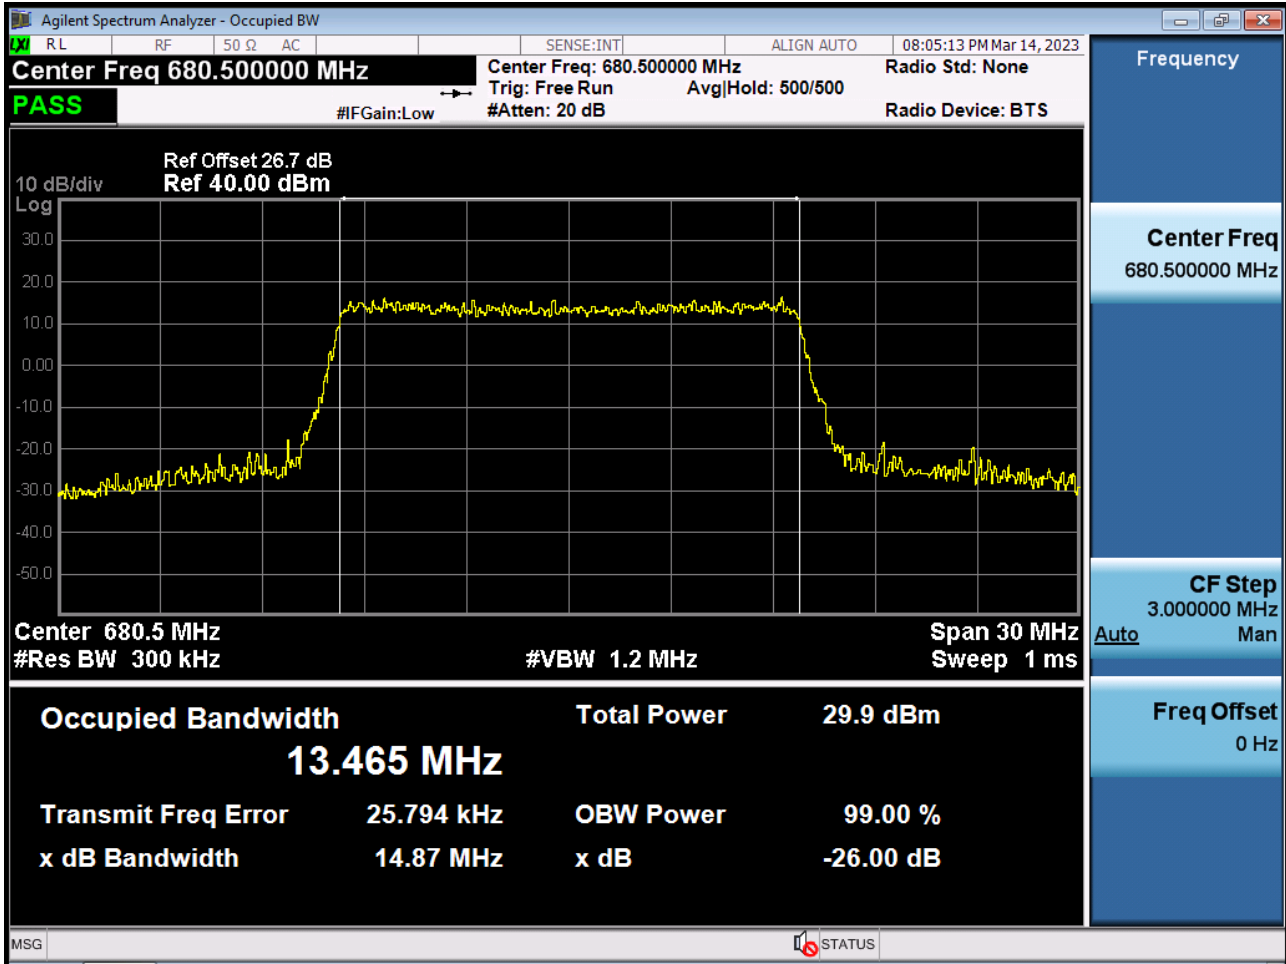


BAND 71. Occupied Bandwidth Plot (15M BW Ch.133297 256QAM_RB25_0)

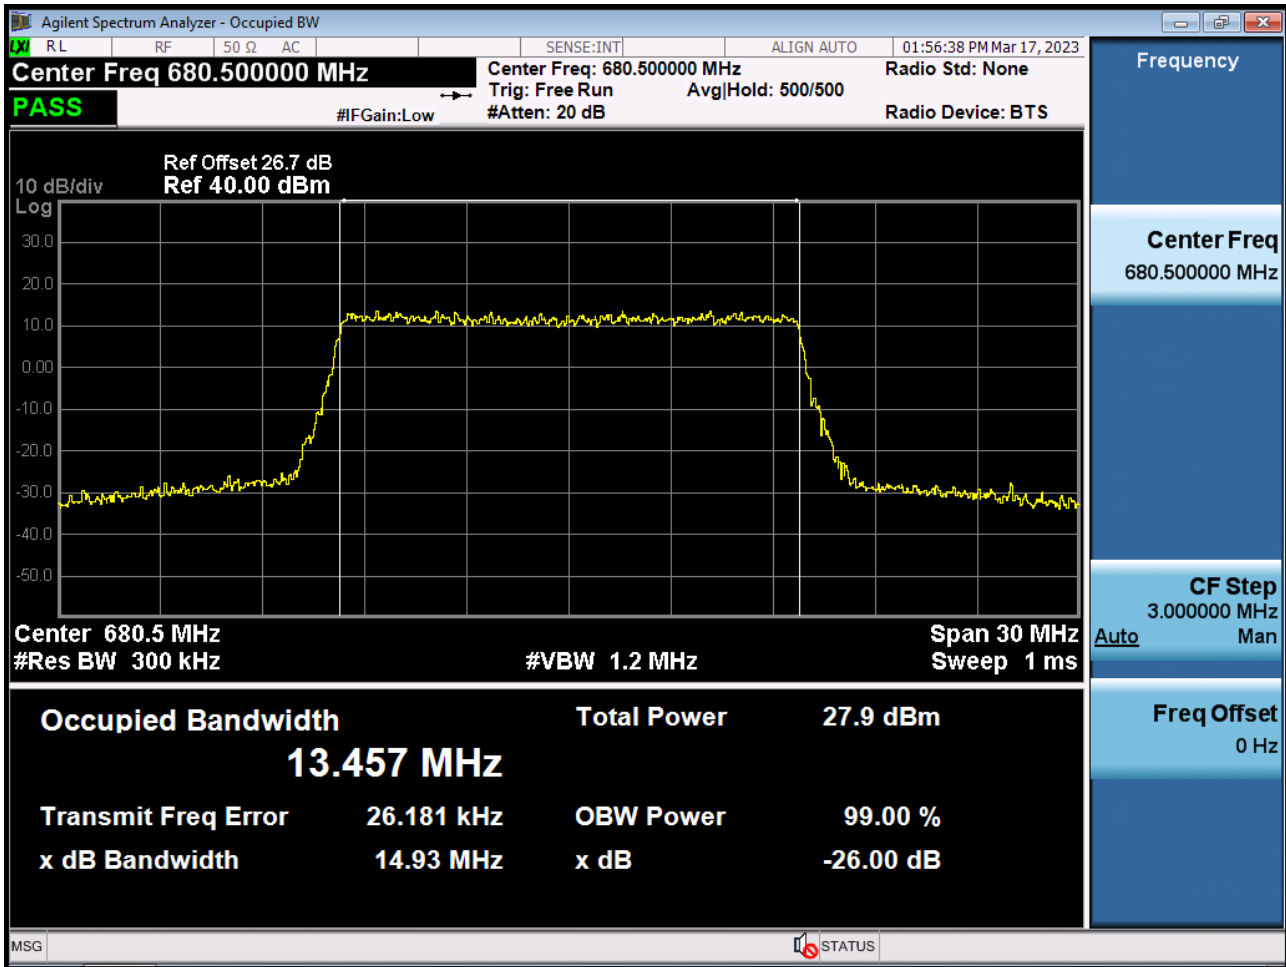


BAND 71. Occupied Bandwidth Plot (20M BW Ch.133297 QPSK_RB50_0)

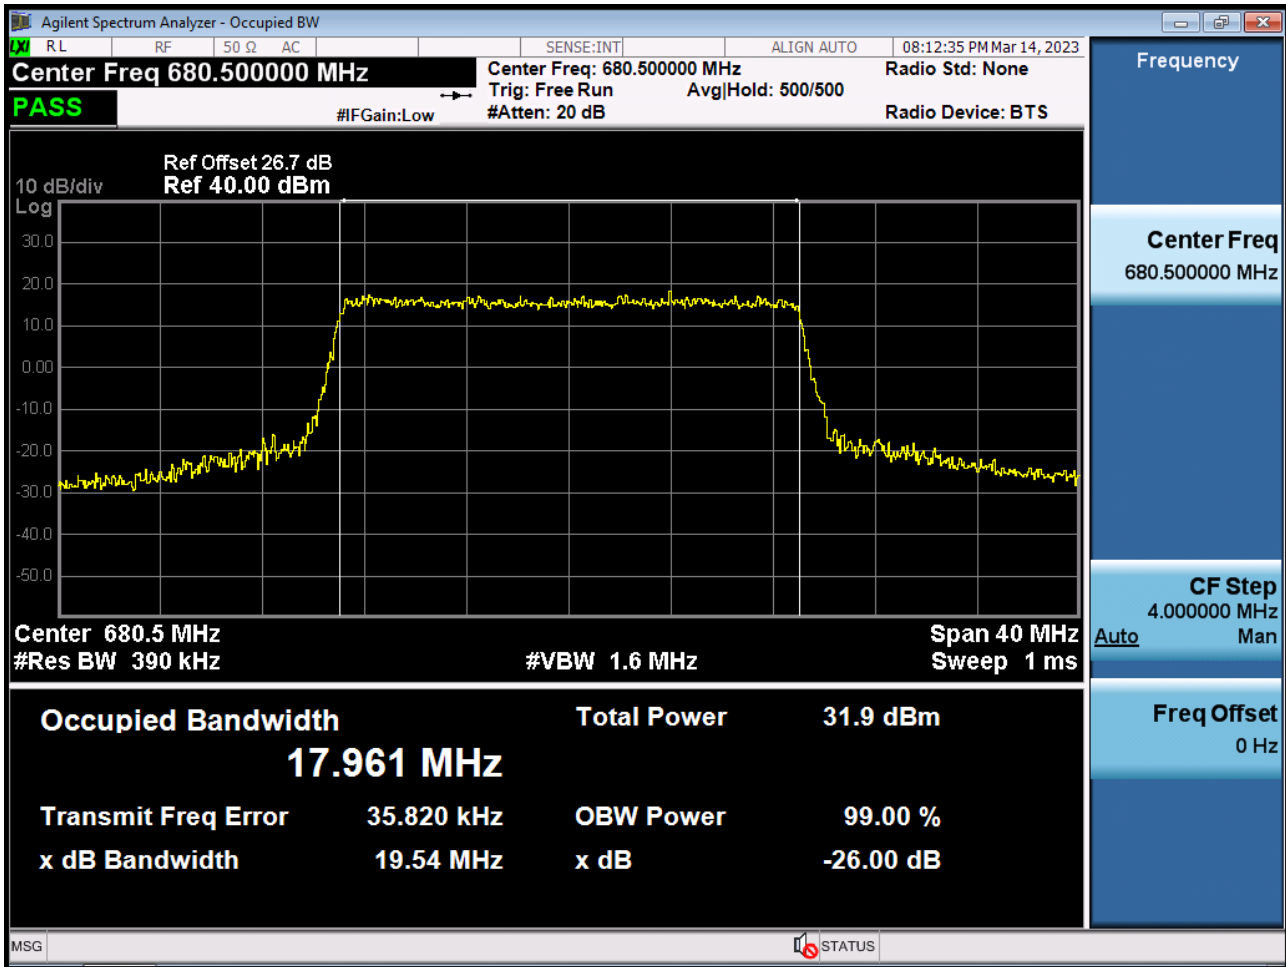


BAND 71. Occupied Bandwidth Plot (20M BW Ch.133297 16QAM_RB50_0)

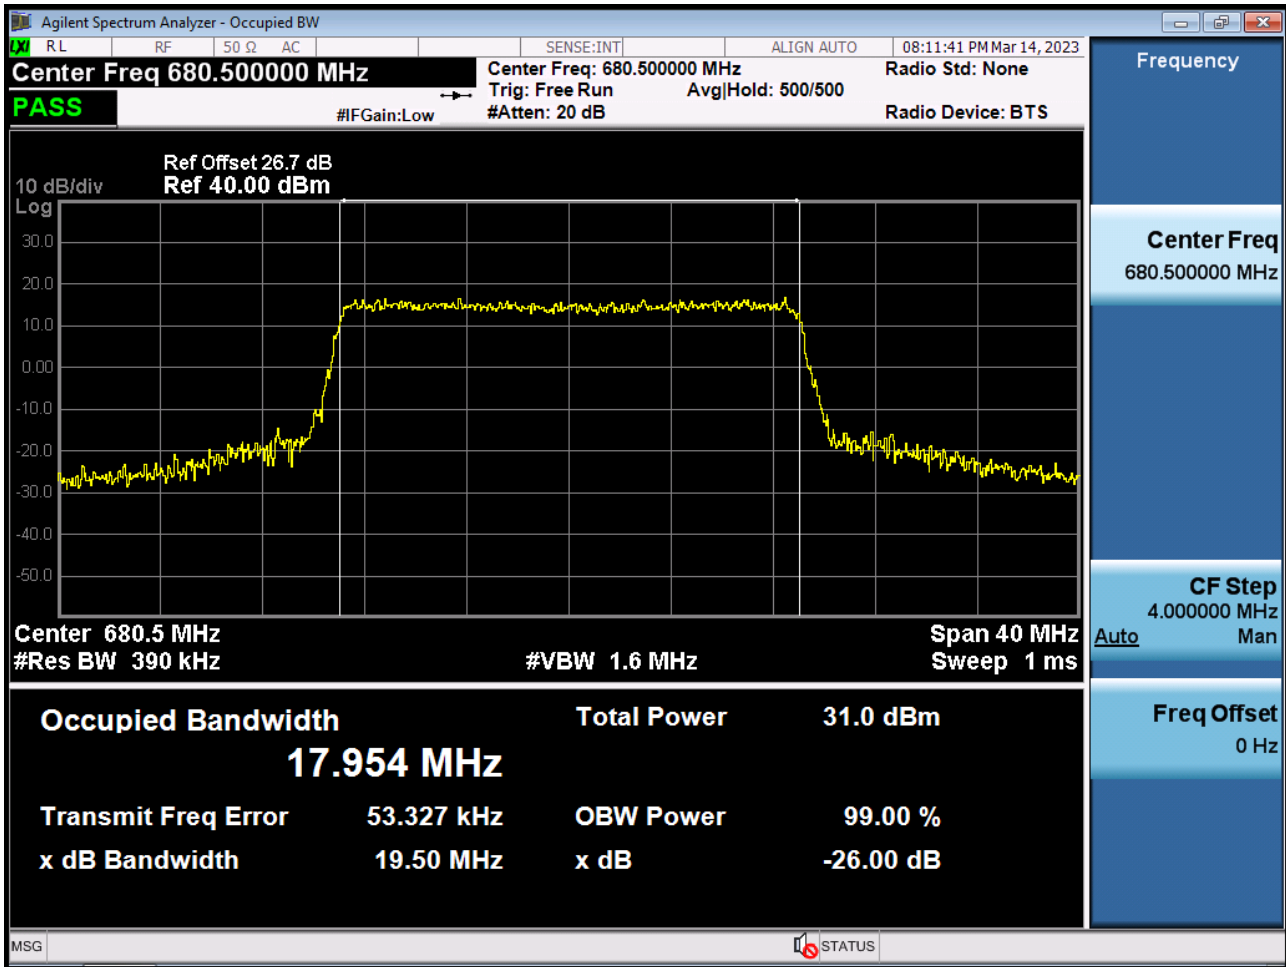


BAND 71. Occupied Bandwidth Plot (20M BW Ch.133297 64QAM_RB50_0)

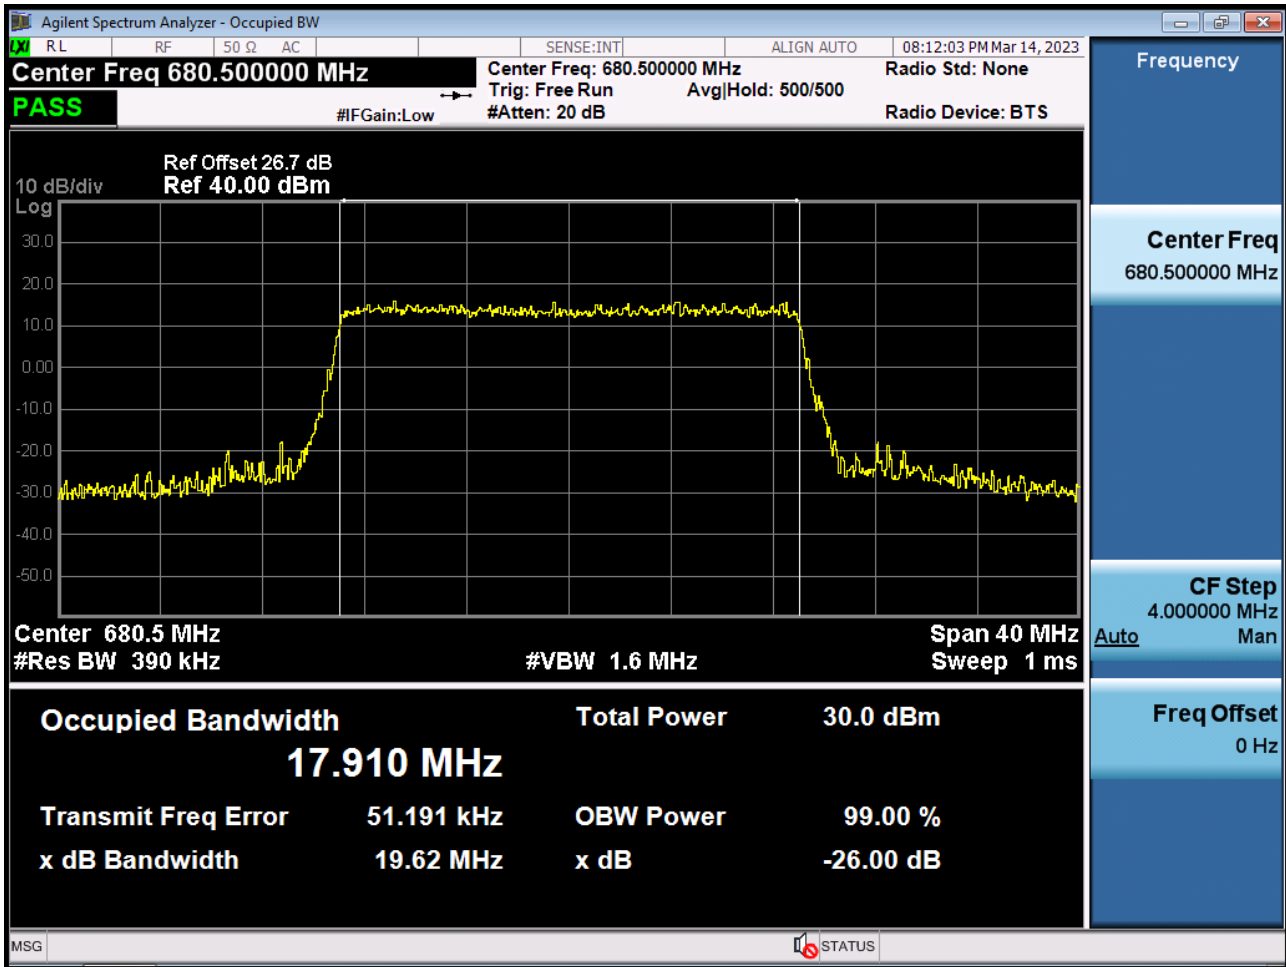

BAND 71. Occupied Bandwidth Plot (20M BW Ch.133297 256QAM_RB50_0)

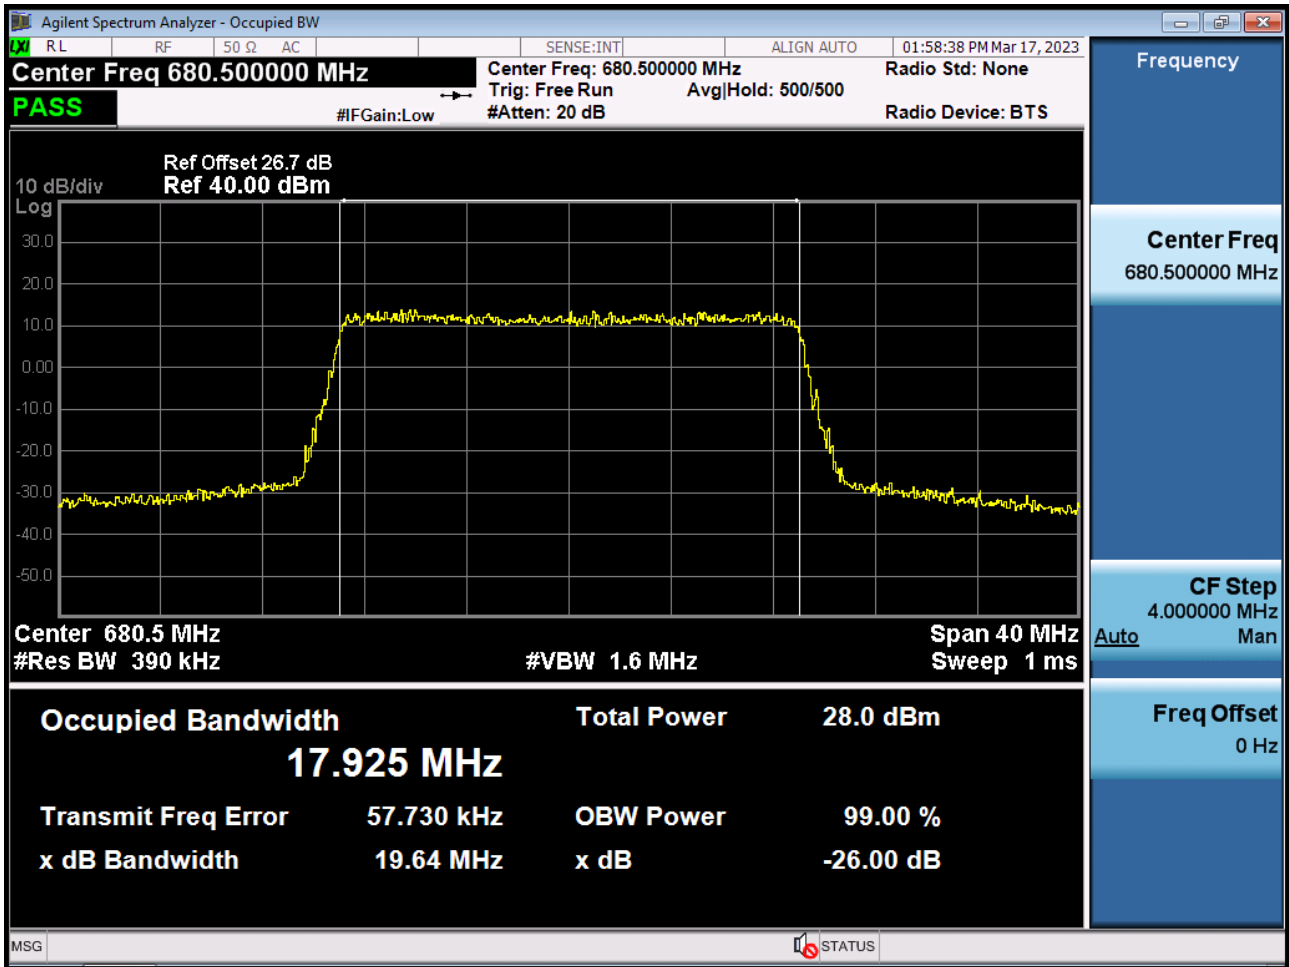

BAND 71. Lower Band Edge Plot (5M BW Ch.133147 QPSK_RB1_Offset 0)

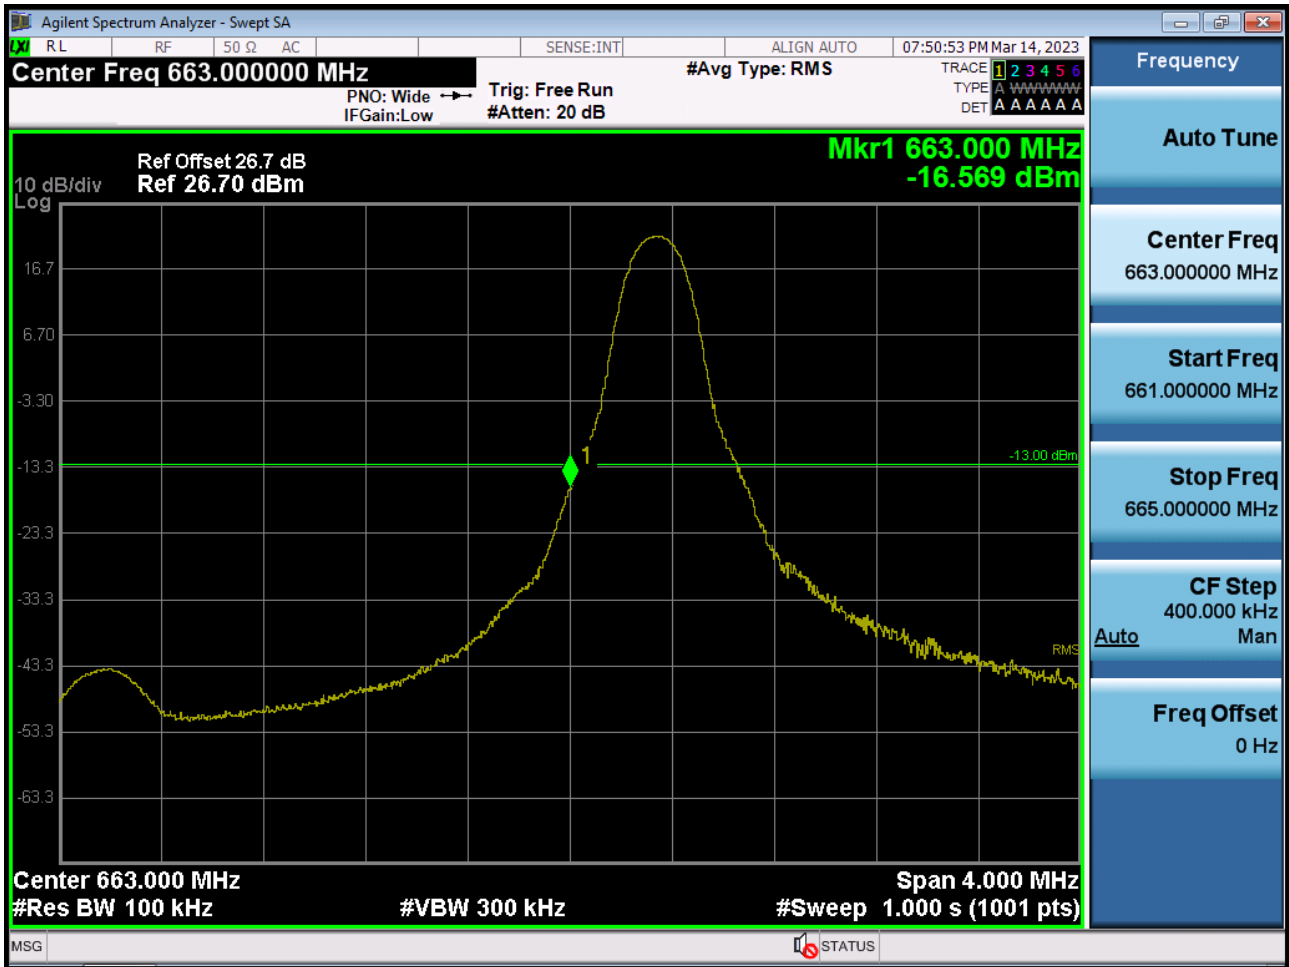

BAND 71. Lower Band Edge Plot (5M BW Ch.133147 QPSK_RB6_Offset 0)



BAND 71. Lower Extended Band Edge Plot (5M BW Ch.133147 QPSK_RB6_0)



BAND 71. Lower Band Edge Plot (10M BW Ch.133172 QPSK_RB1_Offset 0)




BAND 71. Lower Band Edge Plot (10M BW Ch.133172 QPSK_RB15_Offset 0)



BAND 71. Lower Extended Band Edge Plot (10M BW Ch.133172 QPSK_RB15_0)



BAND 71. Lower Band Edge Plot (15M BW Ch.133197 QPSK_RB1_Offset 0)

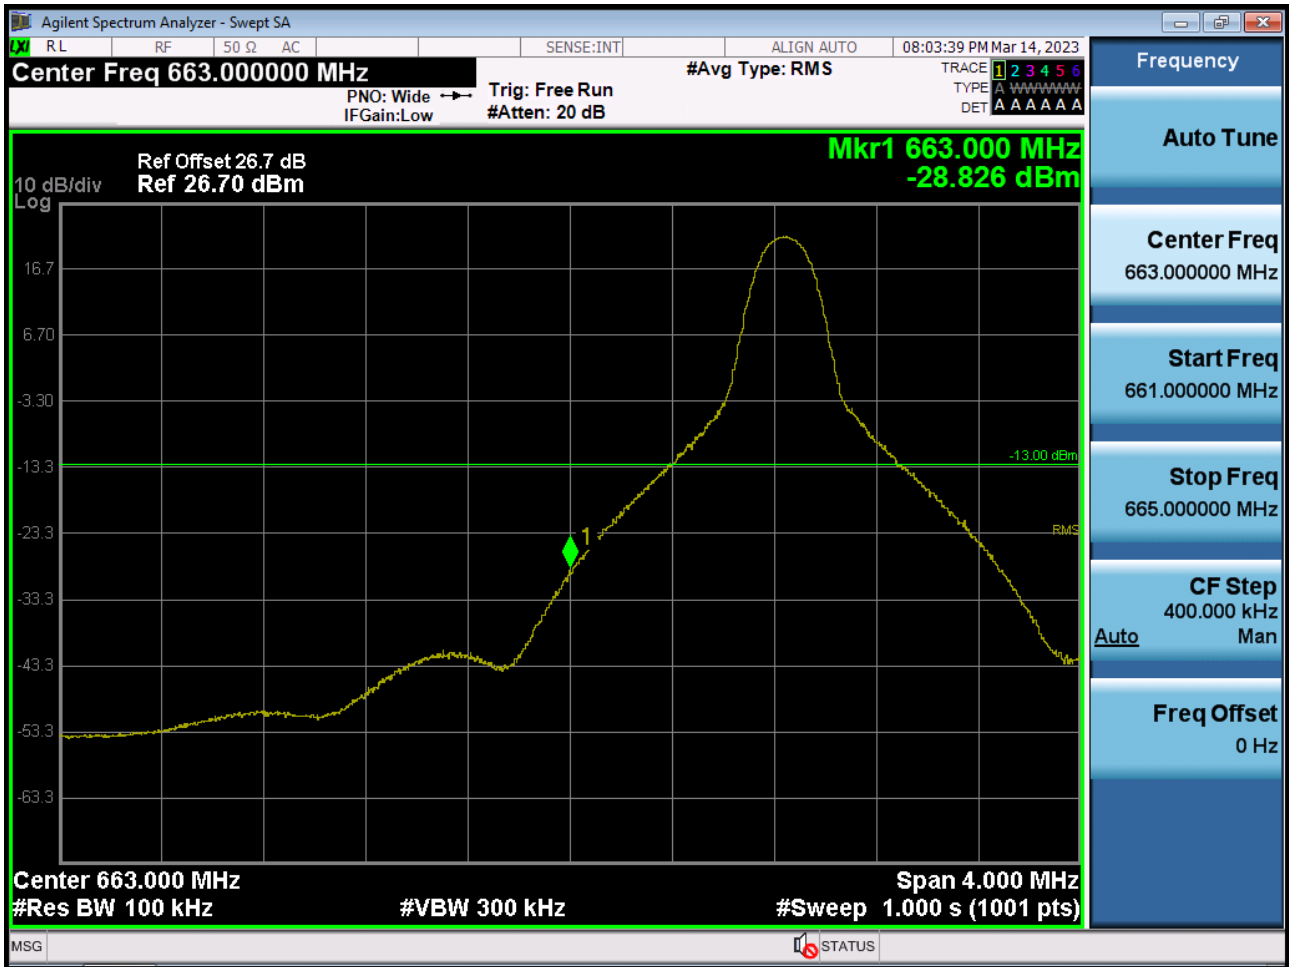

BAND 71. Lower Band Edge Plot (15M BW Ch.133197 QPSK_RB25_Offset 0)



BAND 71. Lower Extended Band Edge Plot (15M BW Ch.133197 QPSK_RB25_0)



BAND 71. Lower Band Edge Plot (20M BW Ch.133222 QPSK_RB1_Offset 0)




BAND 71. Lower Band Edge Plot (20M BW Ch.133222 QPSK_RB50_Offset 0)



BAND 71. Lower Extended Band Edge Plot (20M BW Ch.133222 QPSK_RB50_0)



BAND 71. Upper Band Edge Plot (5M BW Ch.133447 QPSK_RB1_Offset 5)

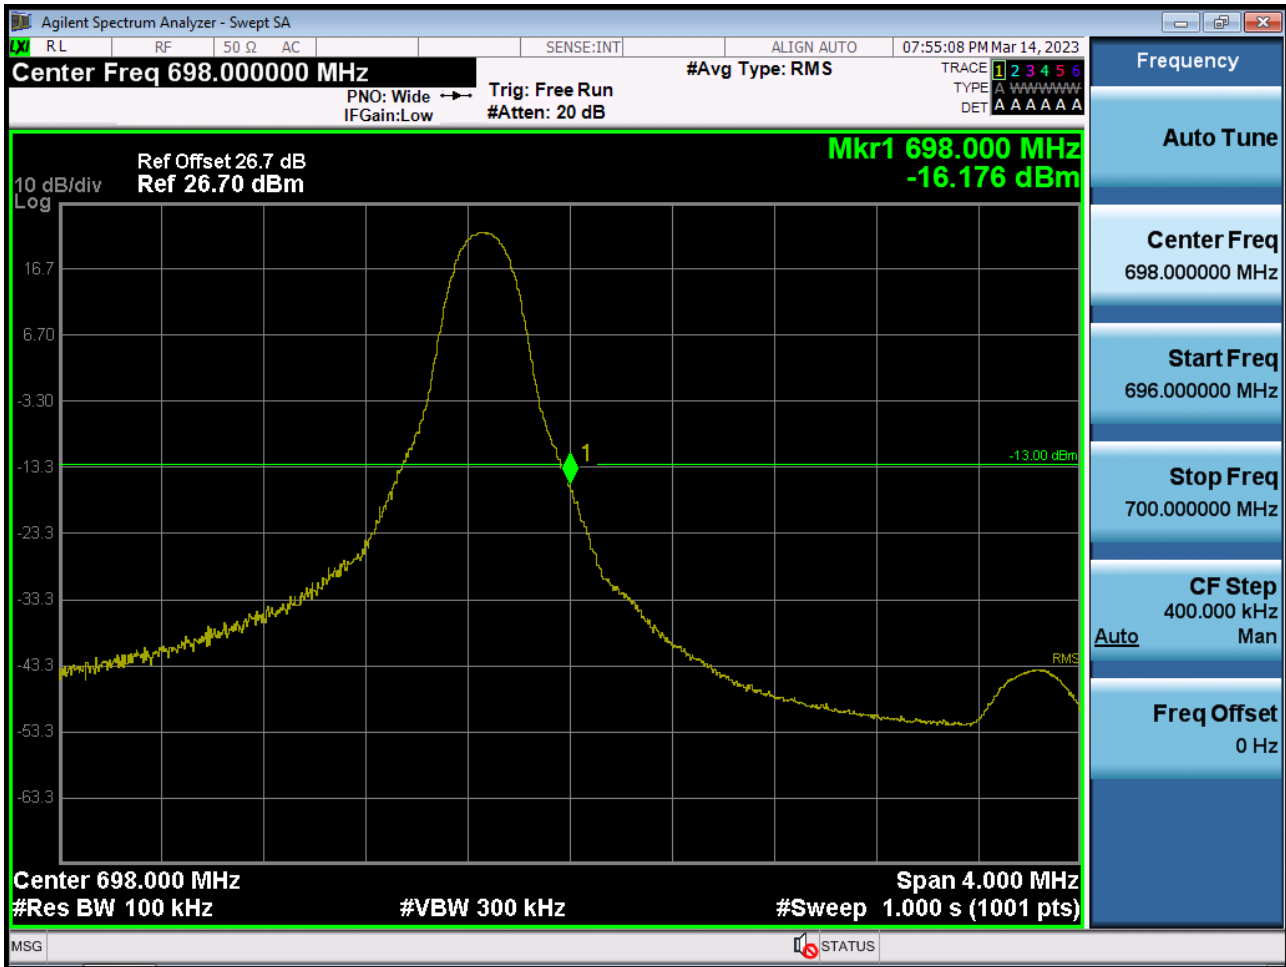

BAND 71. Upper Band Edge Plot (5M BW Ch.133447 QPSK_RB1_Offset 5)



BAND 71. Upper Extended Band Edge Plot (5M BW Ch.133447 QPSK_RB6_0)



BAND 71. Upper Band Edge Plot (10M BW Ch.133422 QPSK_RB1_Offset 14)



BAND 71. Upper Band Edge Plot (10M BW Ch.133422 QPSK_RB1_Offset 14)



BAND 71. Upper Extended Band Edge Plot (10M BW Ch.133422 QPSK_RB15_0)



BAND 71. Upper Band Edge Plot (15M BW Ch.133397 QPSK_RB1_Offset 24)



BAND 71. Upper Band Edge Plot (15M BW Ch.133397 QPSK_RB25_Offset 0)



BAND 71. Upper Extended Band Edge Plot (15M BW Ch.133397 QPSK_RB25_0)



BAND 71. Upper Band Edge Plot (20M BW Ch.133372 QPSK_RB1_Offset 49)




BAND 71. Upper Band Edge Plot (20M BW Ch.133372 QPSK_RB50_Offset 0)




BAND 71. Upper Extended Band Edge Plot (20M BW Ch.133372 QPSK_RB50_0)




BAND 71. Conducted Spurious Plot _ (133147ch_5MHz_QPSK_RB 1_0)

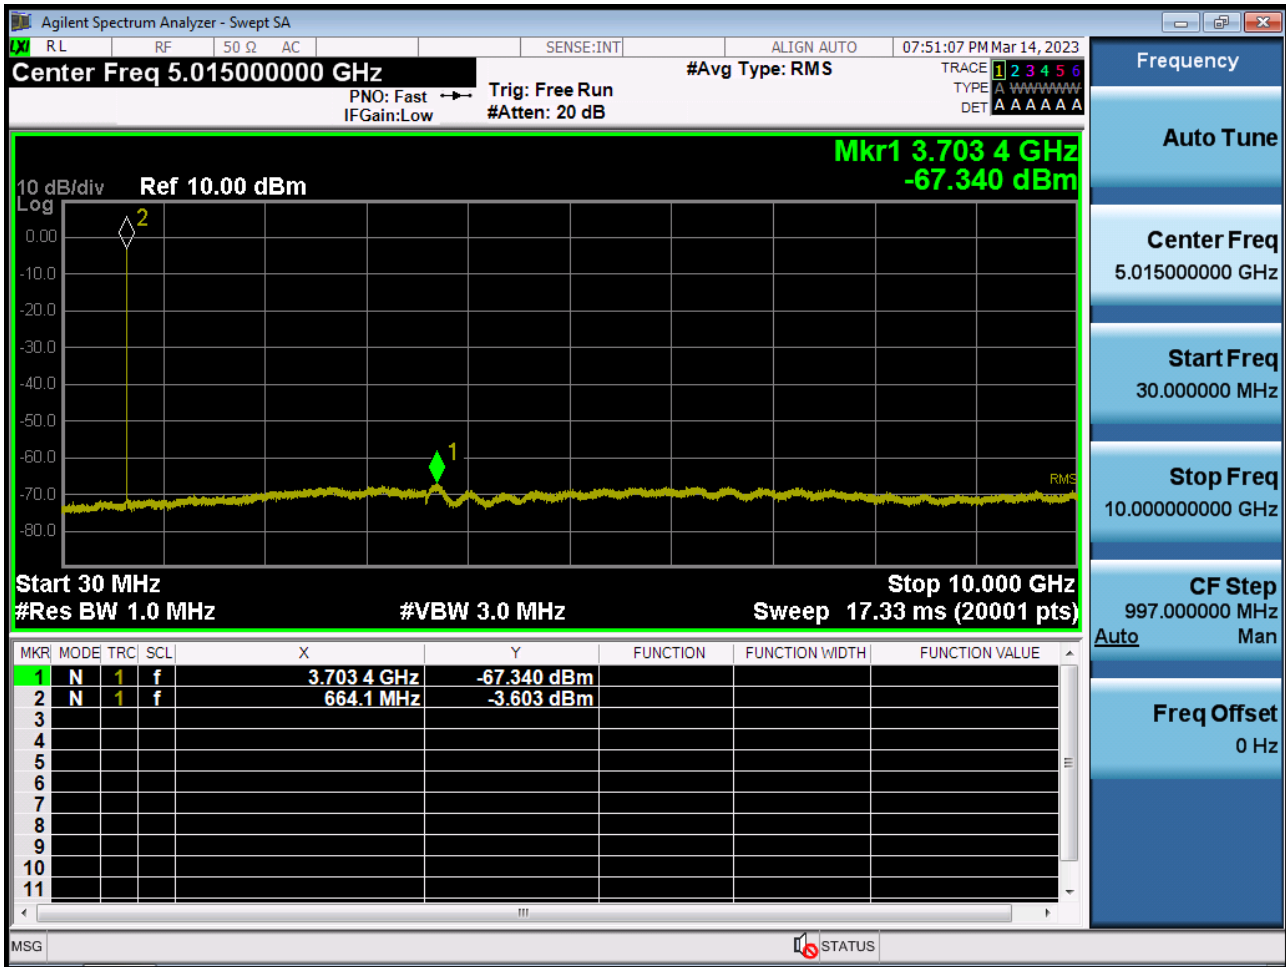


BAND 71. Conducted Spurious Plot _ (133297ch_5MHz_QPSK_RB 1_0)

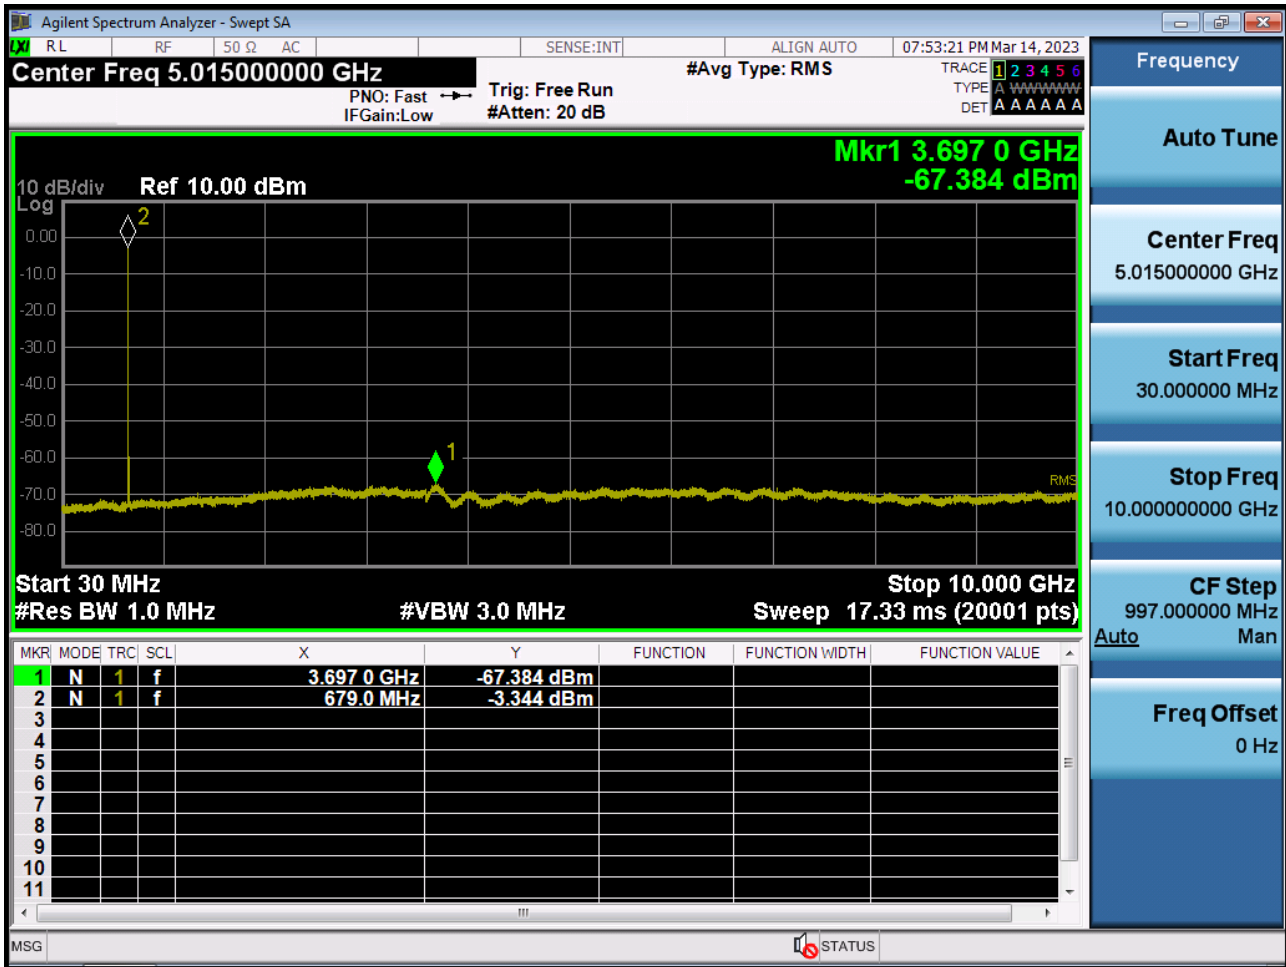


BAND 71. Conducted Spurious Plot _ (133447ch_5MHz_QPSK_RB 1_0)

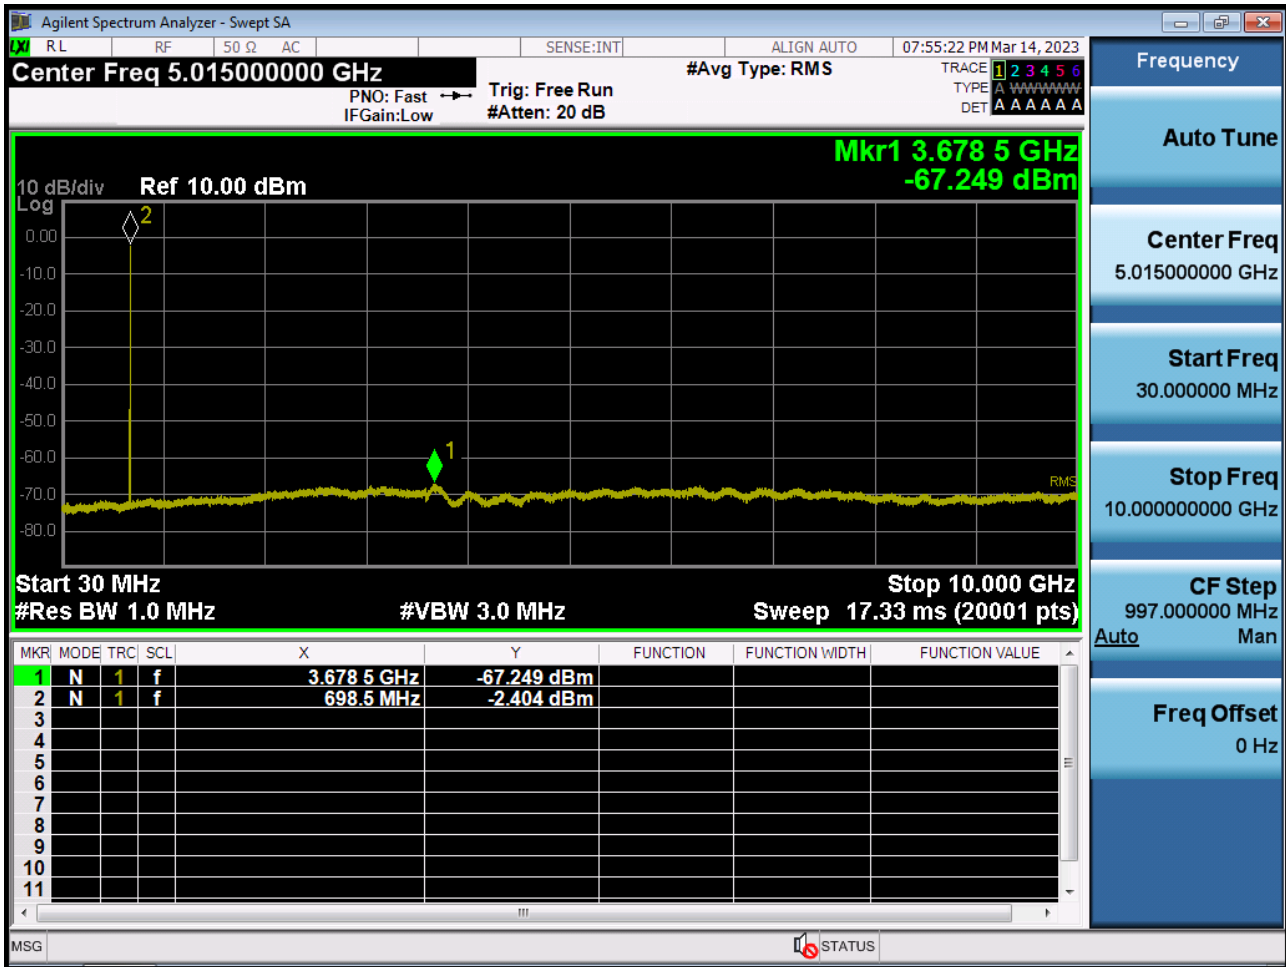


BAND 71. Conducted Spurious Plot _ (133172ch_10MHz_QPSK_RB 1_0)

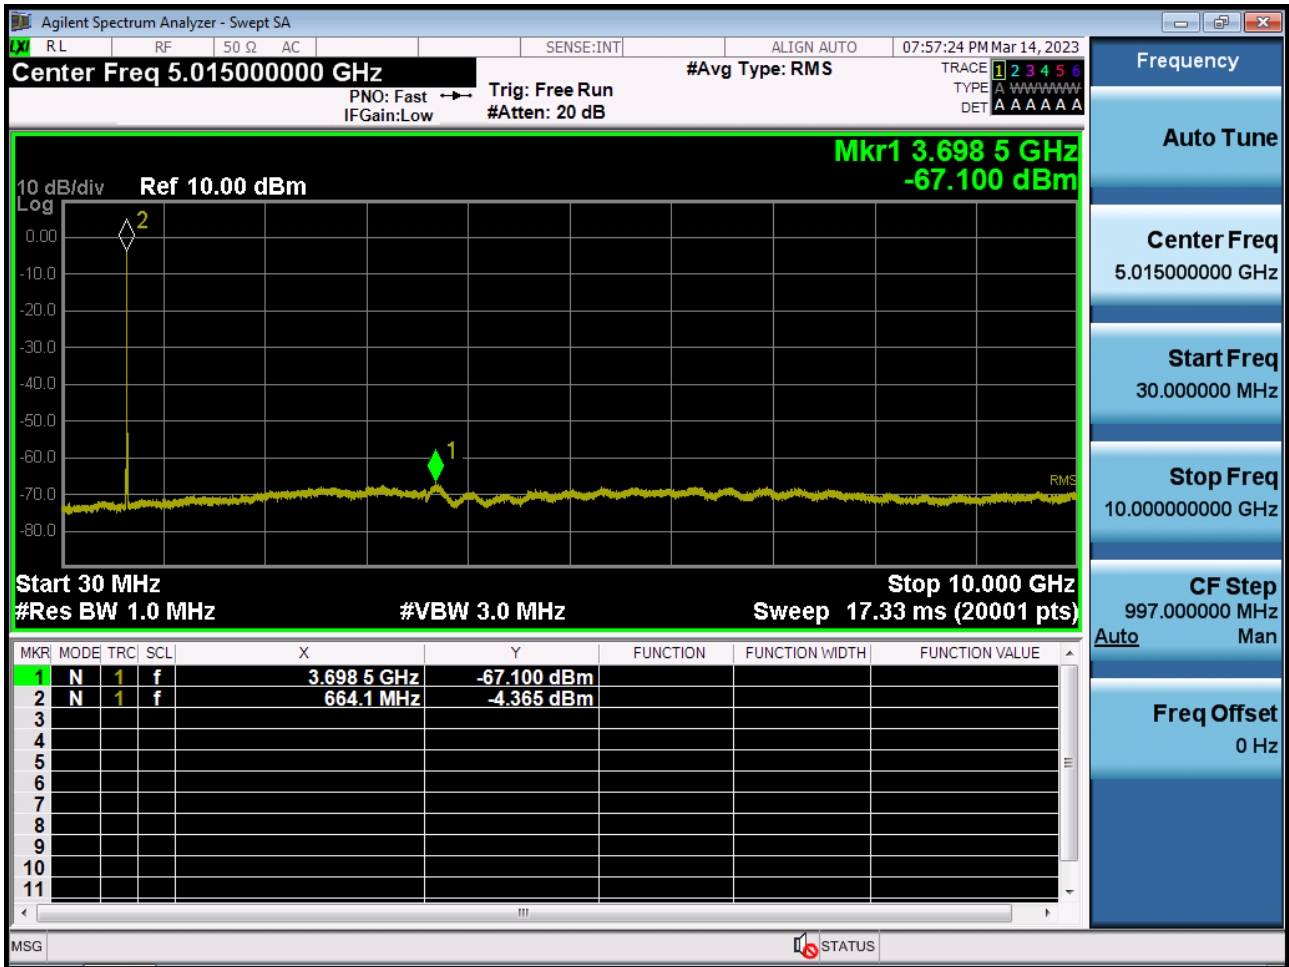


BAND 71. Conducted Spurious Plot _ (133297ch_10MHz_QPSK_RB 1_0)

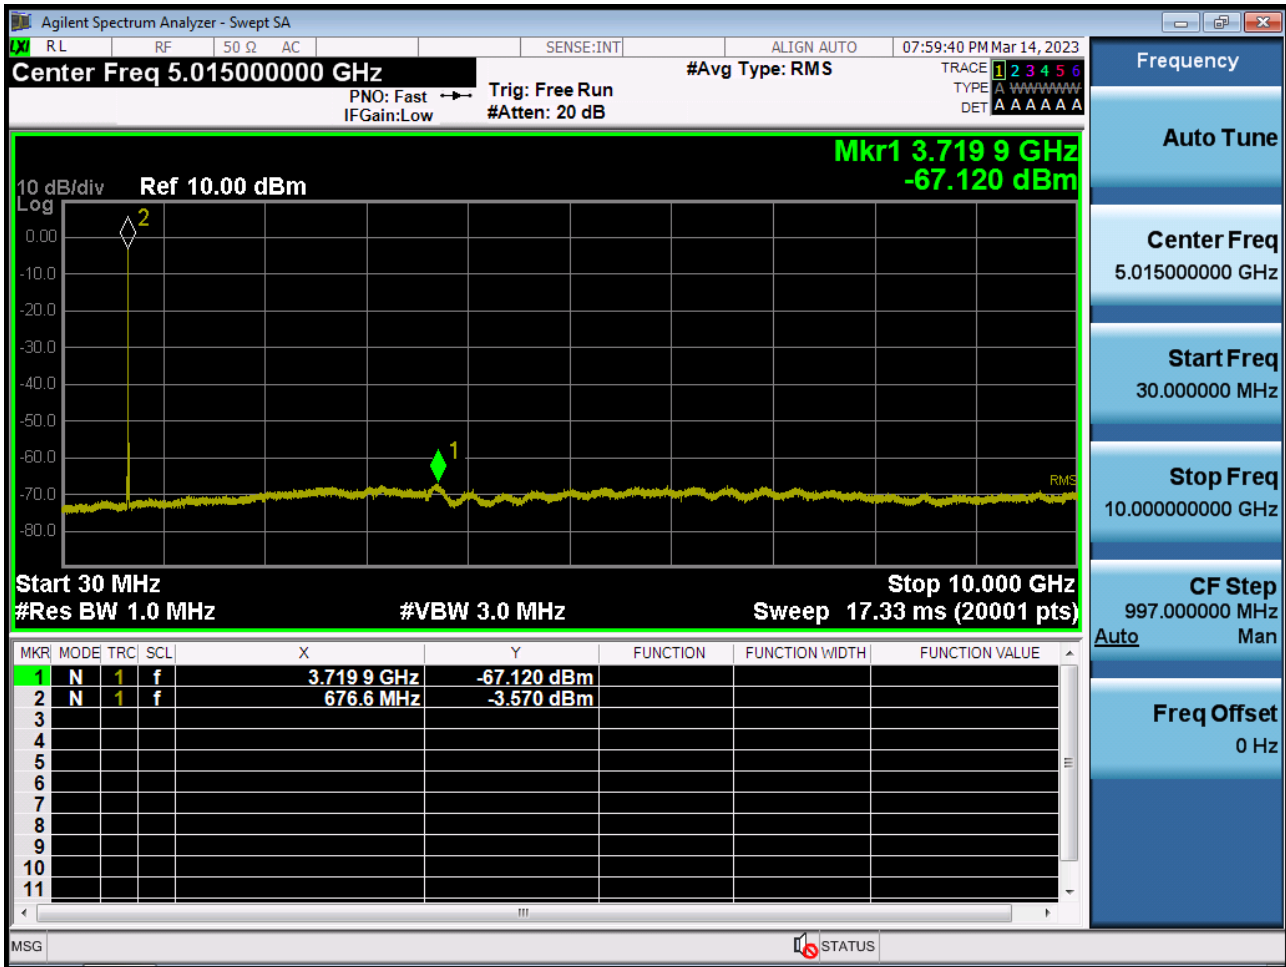


BAND 71. Conducted Spurious Plot _ (133422ch_10MHz_QPSK_RB 1_0)

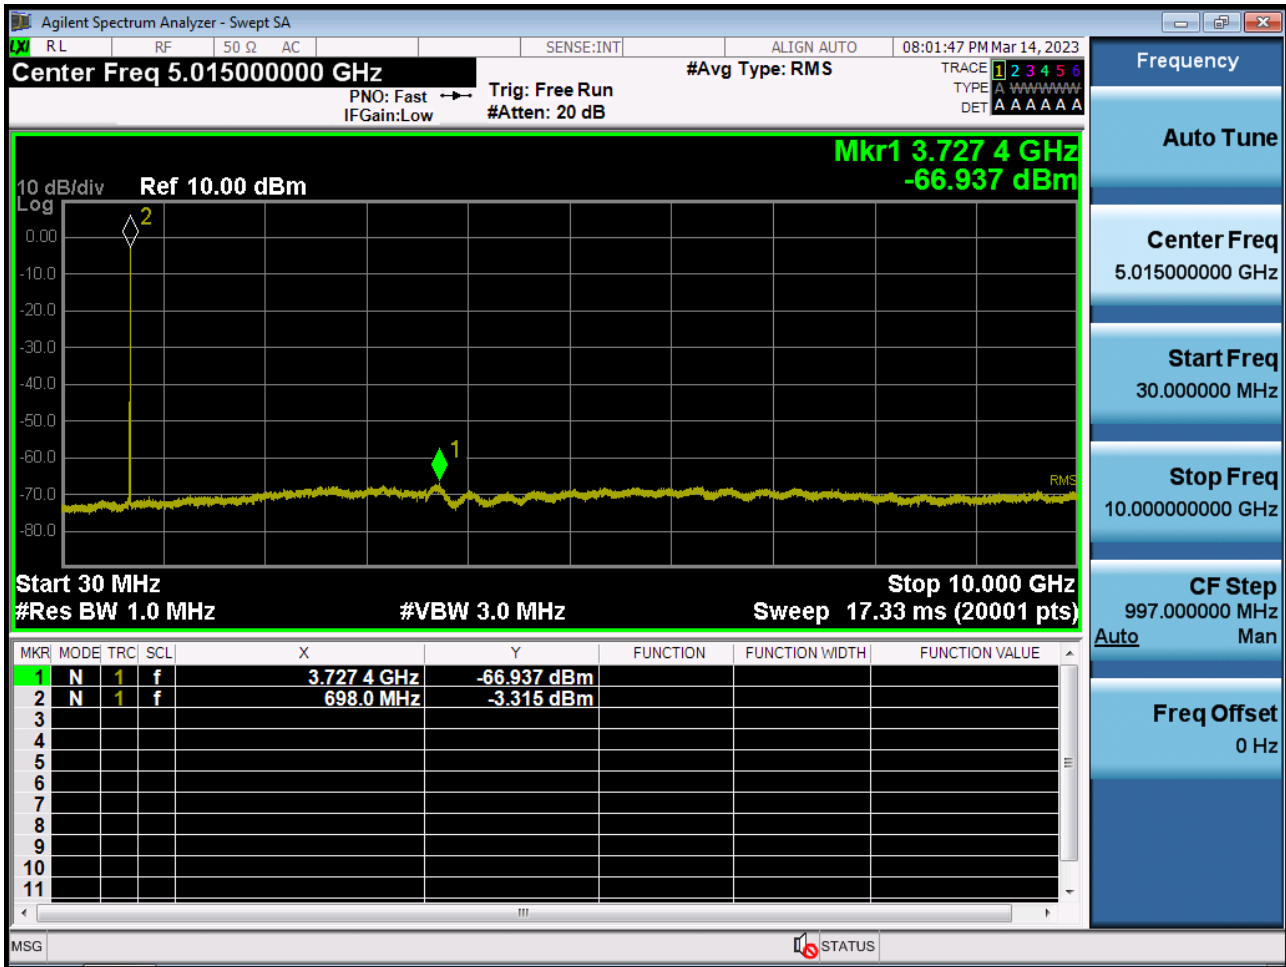


BAND 71. Conducted Spurious Plot _ (133197ch_15MHz_QPSK_RB 1_0)

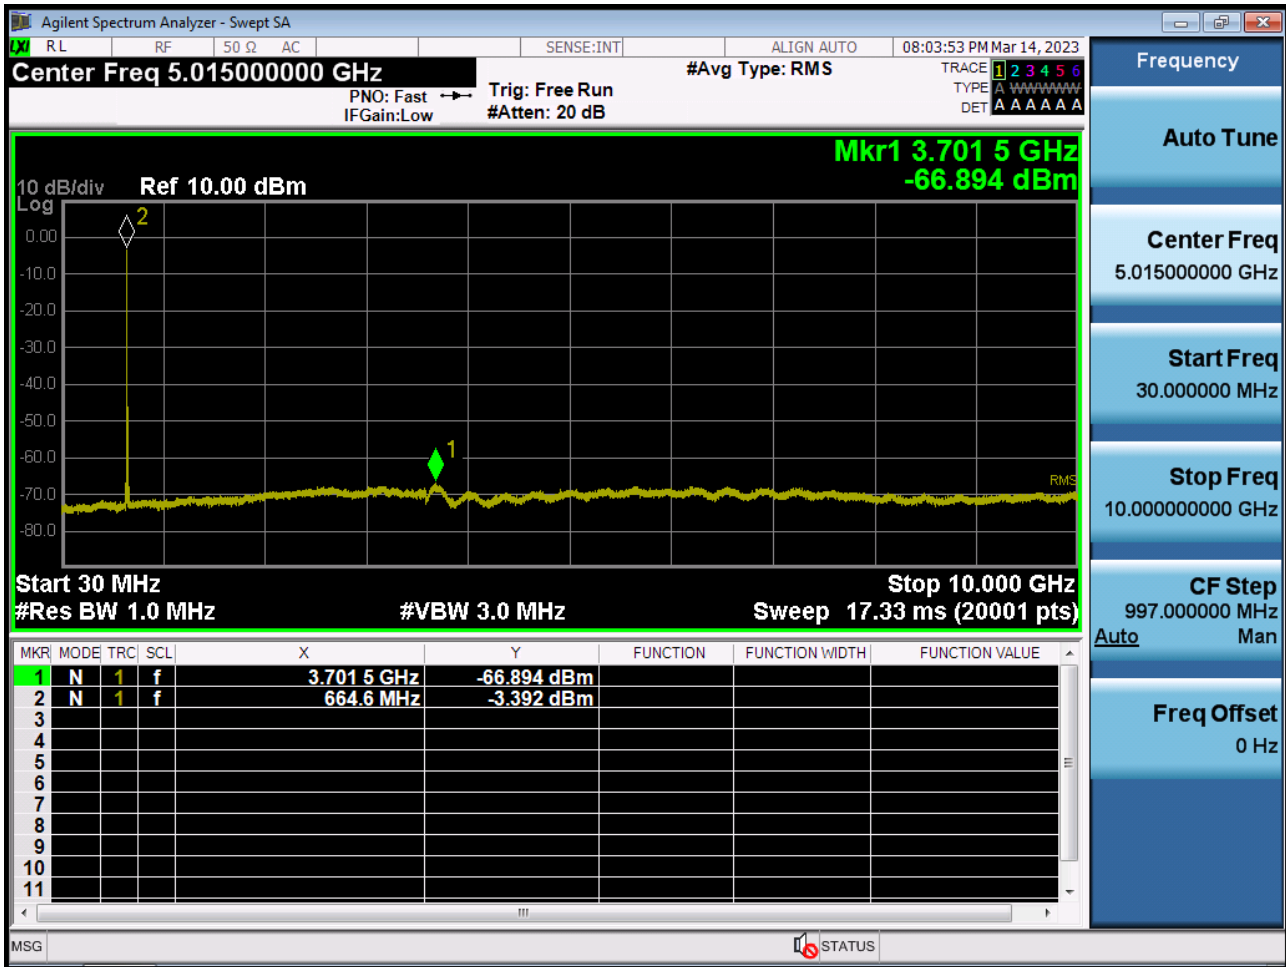


BAND 71. Conducted Spurious Plot _ (133297ch_15MHz_QPSK_RB 1_0)

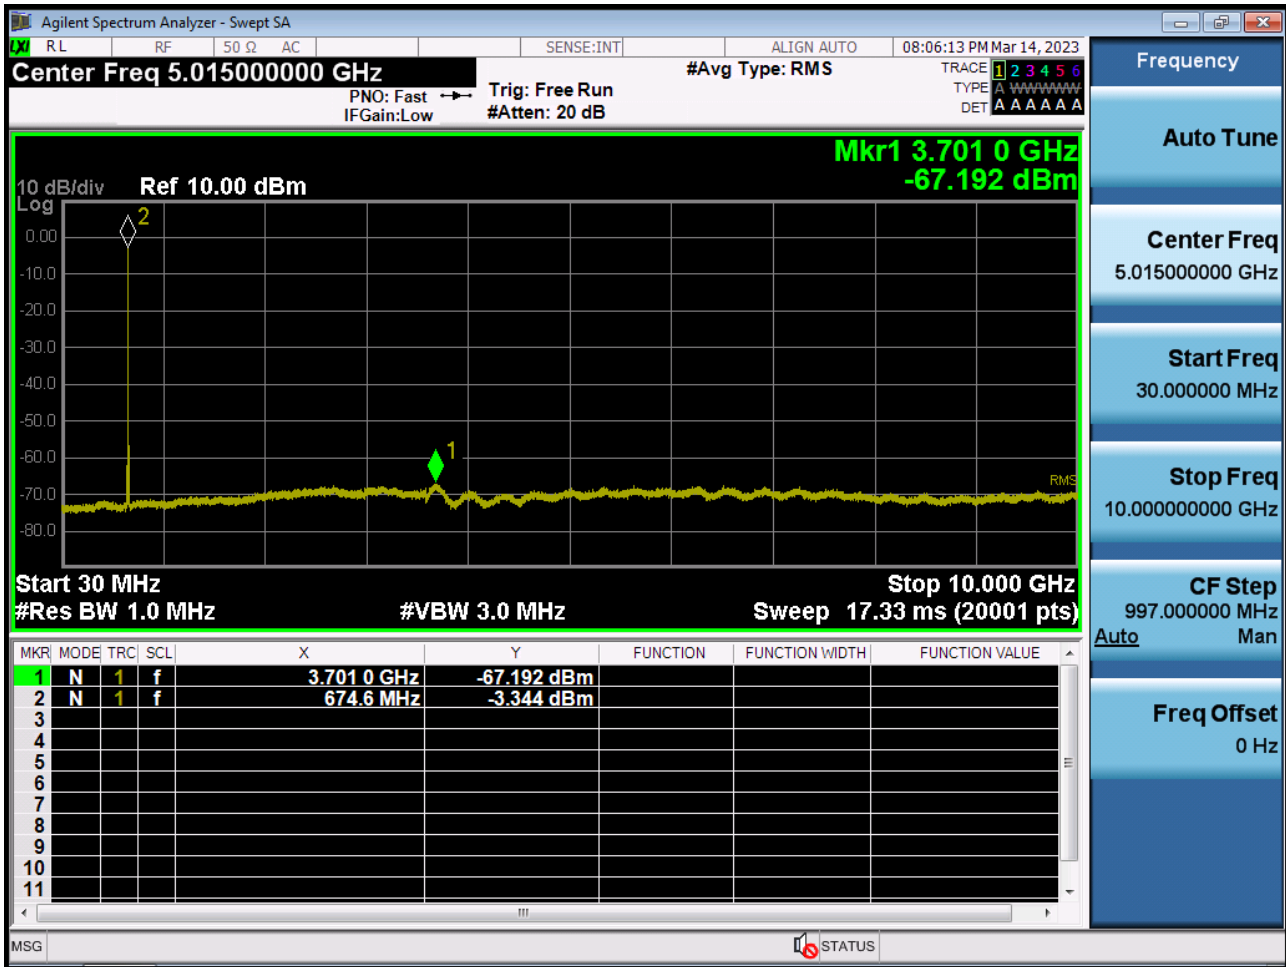


BAND 71. Conducted Spurious Plot _ (133397ch_15MHz_QPSK_RB 1_0)

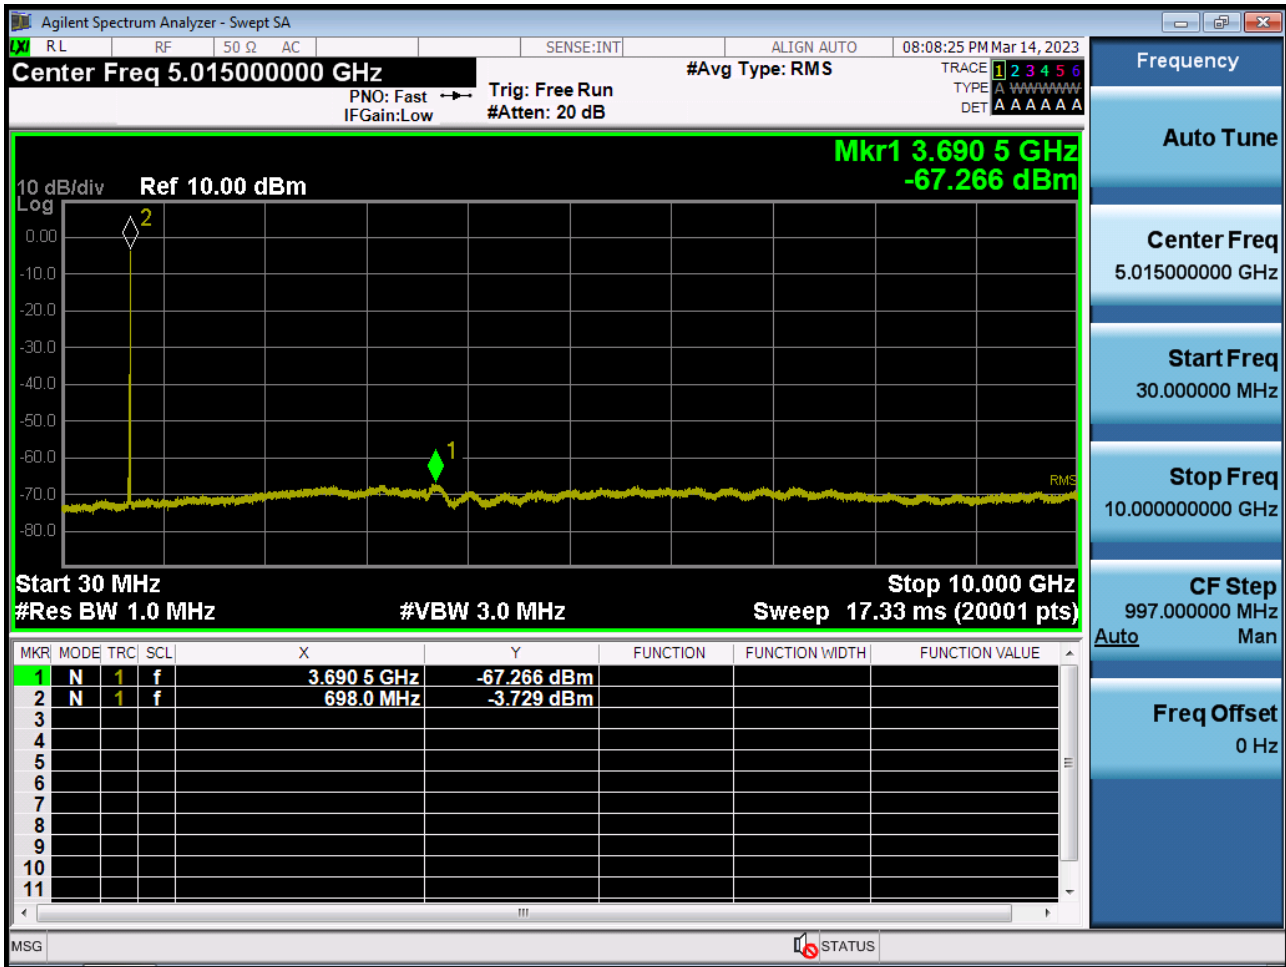


BAND 71. Conducted Spurious Plot _ (133222ch_20MHz_QPSK_RB 1_0)

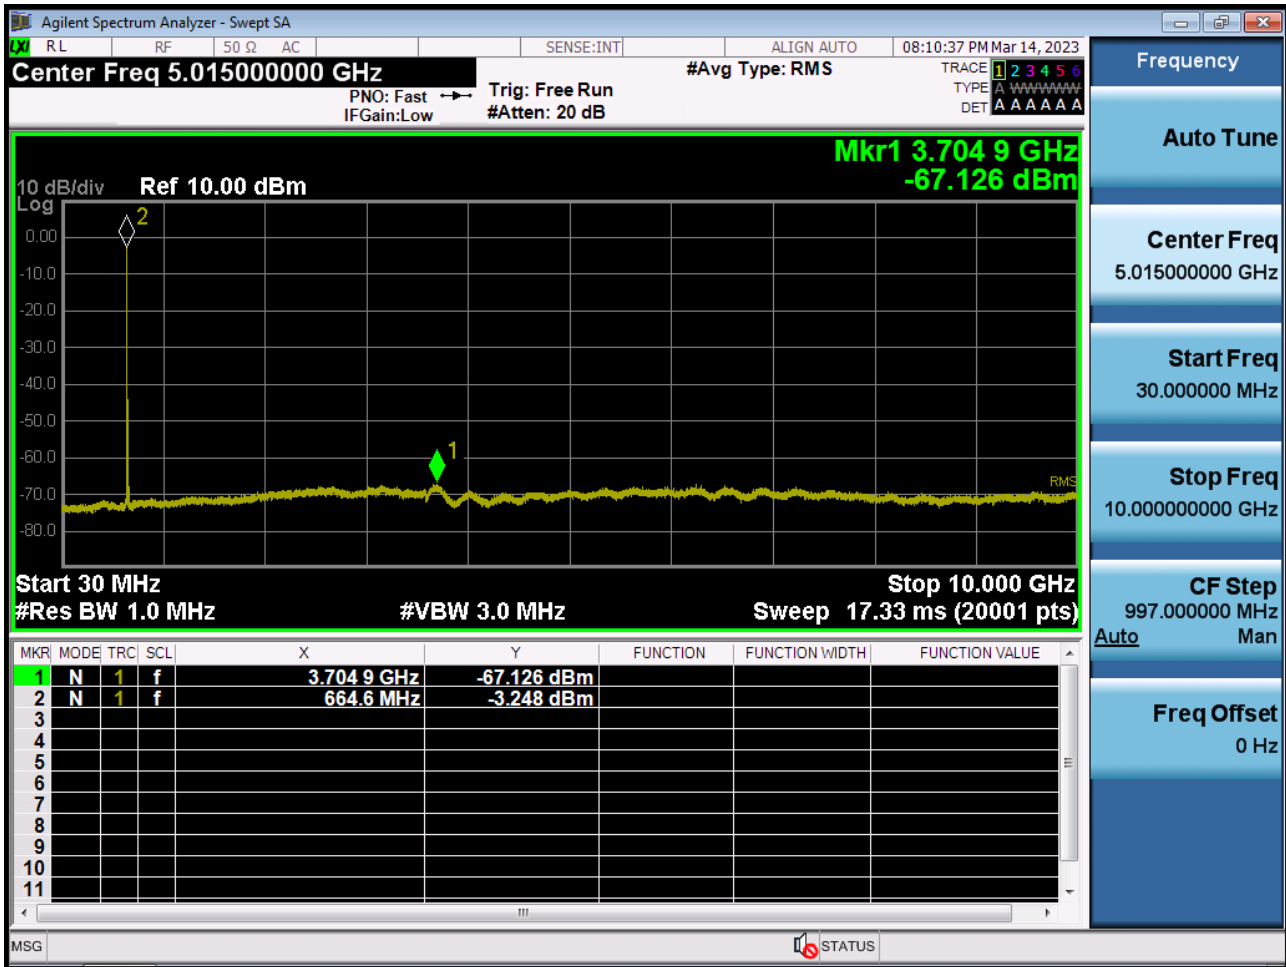

BAND 71. Conducted Spurious Plot _ (133297ch_20MHz_QPSK_RB 1_0)

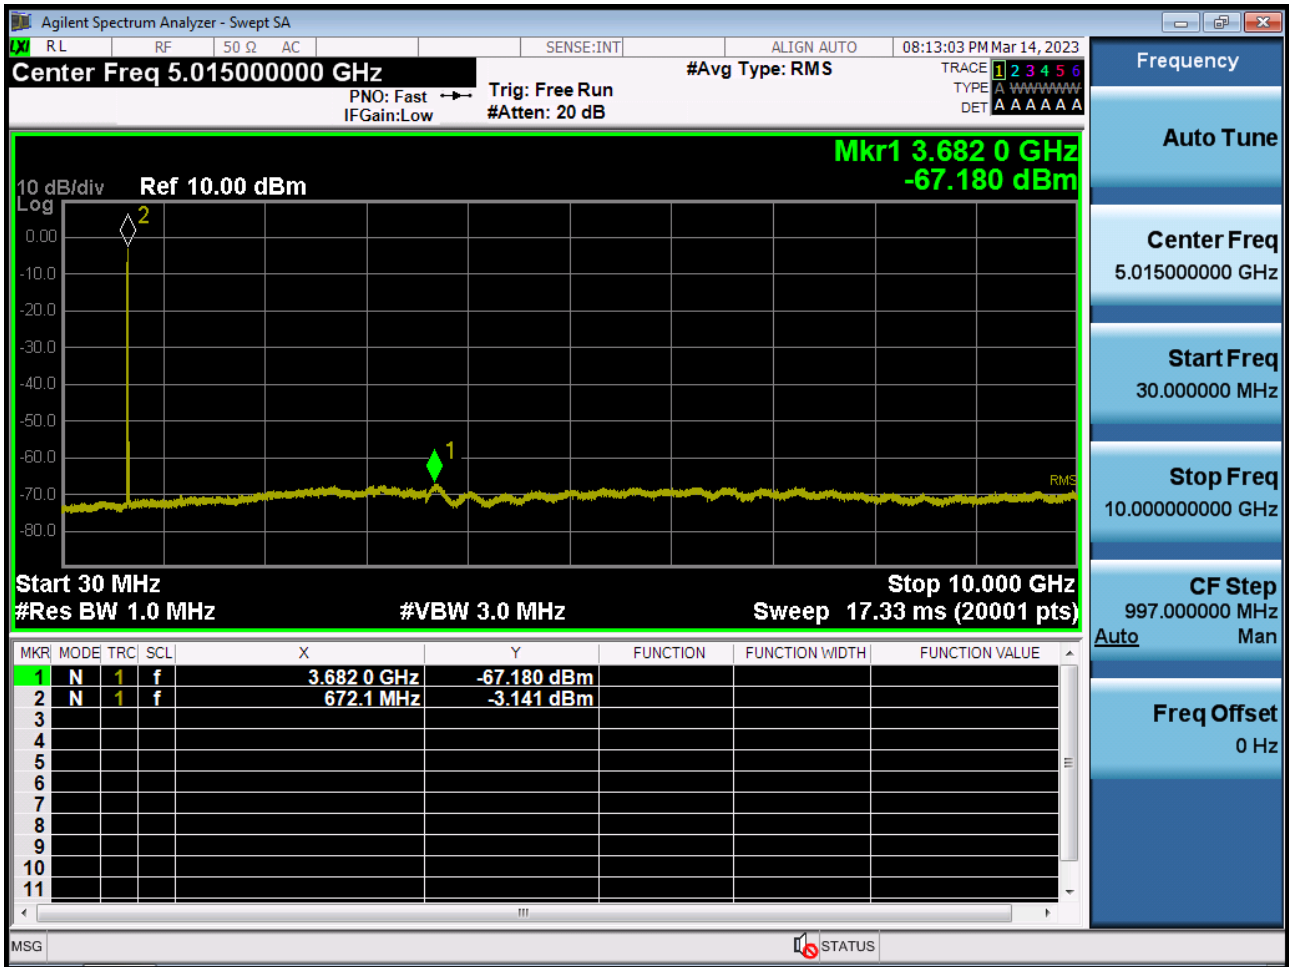

BAND 71. Conducted Spurious Plot _ (133372ch_20MHz_QPSK_RB 1_0)

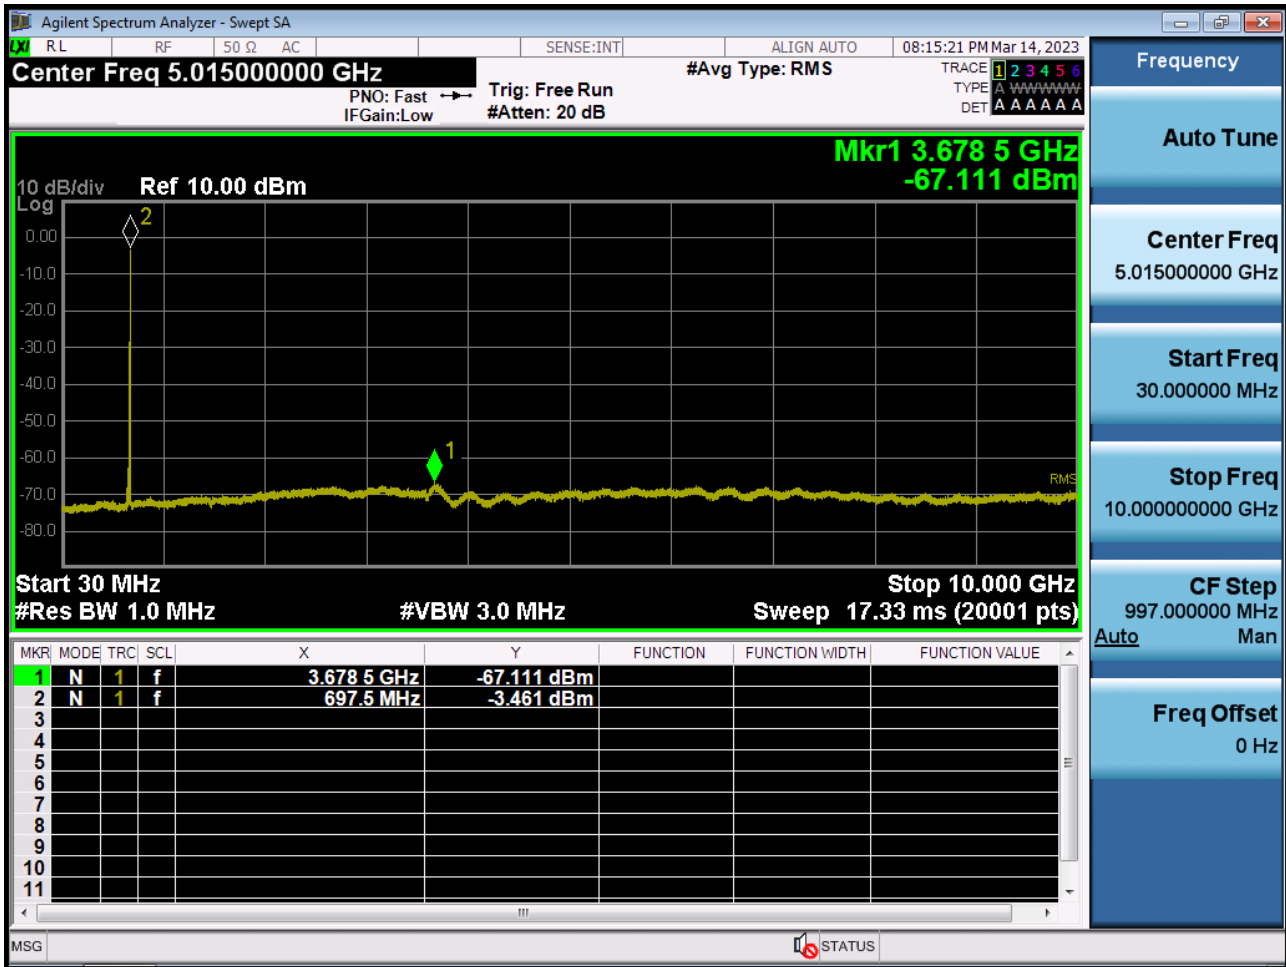

10. ANNEX A_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-2305-FC019-P