

FCC Carrier Aggregation REPORT

Certification

Applicant Name:

SAMSUNG Electronics Co., Ltd.

Date of Issue:

May 09, 2023

Location:

HCT CO., LTD.,

74, Seoicheon-ro 578beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA**Report No.:** HCT-RF-2305-FC033**FCC ID:****A3LSMX818U****APPLICANT:****SAMSUNG Electronics Co., Ltd.**

Model(s): SM-X818U

EUT Type: Tablet

FCC Classification: Citizens Band End User Devices (CBE)

FCC Rule Part(s): §96, §2

Mode (PCC+SCC)	Tx Frequency (MHz)	Modulation	Emission Designator	EIRP	
				Max. Power (dBm)	Max. Power (W)
5 MHz+20 MHz	3553.3 - 3690.0	QPSK	22M5G7D	20.76	0.119
		16QAM	22M5W7D	20.85	0.122
		64QAM	22M7W7D	20.75	0.119
		256QAM	22M8W7D	17.63	0.058
10 MHz+20 MHz	3555.5 - 3690.0	QPSK	26M7G7D	21.32	0.136
		16QAM	27M6W7D	21.47	0.140
		64QAM	27M7W7D	20.74	0.119
		256QAM	27M5W7D	17.62	0.058
15 MHz+20 MHz	3557.8 - 3690.0	QPSK	32M5G7D	20.87	0.122
		16QAM	32M6W7D	21.73	0.149
		64QAM	32M4W7D	20.77	0.119
		256QAM	32M4W7D	17.69	0.059
20 MHz+5 MHz	3560.0 - 3696.7	QPSK	22M9G7D	20.16	0.104
		16QAM	22M7W7D	20.27	0.106
		64QAM	23M0W7D	20.04	0.101
		256QAM	22M8W7D	17.04	0.051
20 MHz+10 MHz	3560.0 - 3694.5	QPSK	27M8G7D	20.90	0.123
		16QAM	27M7W7D	20.99	0.126
		64QAM	27M6W7D	20.50	0.112
		256QAM	27M6W7D	17.47	0.056
20 MHz+15 MHz	3560.0 - 3692.2	QPSK	32M7G7D	21.55	0.143
		16QAM	32M5W7D	21.66	0.147
		64QAM	32M5W7D	20.75	0.119
		256QAM	32M7W7D	17.76	0.060
20 MHz+20 MHz	3560.0 - 3690.0	QPSK	37M4G7D	21.63	0.146
		16QAM	37M3W7D	21.85	0.153
		64QAM	37M6W7D	21.05	0.127
		256QAM	37M7W7D	17.85	0.061

The measurements shown in this report were made in accordance with the procedures specified in CFR47 section §2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S.C. 853(a)

REVIEWED BY



Report prepared by : Jae Mun Do
Engineer of Telecommunication Testing Center

Report approved by : Jong Seok Lee
Manager of Telecommunication Testing Center

This test results were applied only to the test methods required by the standard.

This laboratory is not accredited for the test results marked *.
The above Test Report is the accredited test result by (KS Q) ISO/IEC 17025 and KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA. (HCT Accreditation No.: KT197)

* The report shall not be reproduced except in full(only partly) without approval of the laboratory.

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-RF-2305-FC033	May 09, 2023	- First Approval Report

The result shown in this test report refer only to the sample(s) tested unless otherwise stated.

Table of Contents

REVIEWED BY	2
1. GENERAL INFORMATION	5
2. INTRODUCTION	6
2.1. DESCRIPTION OF EUT.....	6
2.2. MEASURING INSTRUMENT CALIBRATION	6
2.3. TEST FACILITY	6
3. DESCRIPTION OF TESTS.....	7
3.1 TEST PROCEDURE	7
3.2 RADIATED POWER.....	8
3.3 RADIATED SPURIOUS EMISSIONS	9
3.4 PEAK- TO- AVERAGE RATIO.....	10
3.5 OCCUPIED BANDWIDTH.....	12
3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL	13
3.7 BAND EDGE.....	14
3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	16
3.9 Adjacent Channel Leakage Ratio.....	17
4. LIST OF TEST EQUIPMENT	18
5. MEASUREMENT UNCERTAINTY	19
6. SUMMARY OF TEST RESULTS	20
7. SAMPLE CALCULATION	22
8. TEST DATA	24
8.1 Conducted Power	27
8.2 Equivalent Isotropic Radiated Power.....	30
8.3 Conducted Spurious Emissions	33
8.4 Channel Edge.....	54
8.5 Frequency Stability / Variation Of Ambient Temperature	71
8.6 Radiated Spurious Emissions.....	79
8.7 Occupied Bandwidth.....	82
8.8 Peak- to- Average Ratio	88
8.9 Adjacent Channel Leakage Ratio(ACLR)	94
9. ANNEX A_ TEST SETUP PHOTO.....	99

MEASUREMENT REPORT

1. GENERAL INFORMATION

Applicant Name:	SAMSUNG Electronics Co., Ltd.
Address:	129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
FCC ID:	A3LSMX818U
Application Type:	Certification
FCC Classification:	Citizens Band End User Devices (CBE)
FCC Rule Part(s):	§96, §2
EUT Type:	Tablet
Model(s):	SM-X818U
Tx Frequency:	3553.3 - 3690.0: 5 MHz+20 MHz 3555.5 - 3690.0: 10 MHz+20 MHz 3557.8 - 3690.0: 15 MHz+20 MHz 3560.0 - 3696.7: 20 MHz+5 MHz 3560.0 - 3694.5: 20 MHz+10 MHz 3560.0 - 3692.2: 20 MHz+15 MHz 3560.0 - 3690.0: 20 MHz+20 MHz
Date(s) of Tests:	March 13, 2023 ~ May 09, 2023
Serial number:	Radiated: R32W2003H3M Conducted: R32W2003JJD
LTE CA :	CA 48C (Uplink)

2. INTRODUCTION

2.1. DESCRIPTION OF EUT

The EUT was a Tablet with UMTS and LTE, Sub6.

It also supports IEEE 802.11 a/b/g/n/ac/ax (20/40/80/160 MHz), WIFI 6E AIT, Keyboard, S-pen, mmWave.

2.2. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

2.3. TEST FACILITY

The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the **74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.**

3. DESCRIPTION OF TESTS

3.1 TEST PROCEDURE

Test Description	Test Procedure Used
Occupied Bandwidth	- KDB 971168 D01 v03r01 – Section 4.3 - ANSI C63.26-2015 – Section 5.4.4 - KDB 940660 D01 v01
Channel Edge/ ACLR	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7 - KDB 940660 D01 v01
Spurious and Harmonic Emissions at Antenna Terminal	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7 - KDB 940660 D01 v01
Conducted Output Power	- KDB 971168 D01 v03r01 - Section 5.2.4 - ANSI C63.26-2015 - Section 5.2.1 & 5.2.4.2
Peak- to- Average Ratio	- KDB 971168 D01 v03r01 – Section 5.7 - ANSI C63.26-2015 – Section 5.2.3.4 - KDB 940660 D01 v01
Frequency stability	- ANSI C63.26-2015 – Section 5.6 - KDB 940660 D01 v01
Effective Radiated Power/ Effective Isotropic Radiated Power	- KDB 971168 D01 v03r01 – Section 5.2 & 5.8 - ANSI/TIA-603-E-2016 – Section 2.2.17 - KDB 940660 D01 v01
Radiated Spurious and Harmonic Emissions	- KDB 971168 D01 v03r01 – Section 6.2 - ANSI/TIA-603-E-2016 – Section 2.2.12 - KDB 940660 D01 v01

3.2 RADIATED POWER

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna in accordance with ANSI/TIA-603-E-2016 Clause 2.2.17.

Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5 % of the expected OBW, not to exceed 1 MHz
3. VBW \geq 3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points > 2 x span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

Test Note

1. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission.
2. A half wave dipole is then substituted in place of the EUT. For emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_d \text{ (dBm)} = P_g \text{ (dBm)} - \text{cable loss (dB)} + \text{antenna gain (dB)}$$

Where: P_d is the dipole equivalent power and P_g is the generator output power into the substitution antenna.

3. The maximum value is calculated by adding the forward power to the calibrated source plus its appropriate gain value. These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference between the gain of the horn and an isotropic antenna are taken into consideration
4. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
5. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

3.3 RADIATED SPURIOUS EMISSIONS

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA-603-E-2016.

Test Settings

1. RBW = 100 kHz for emissions below 1 GHz and 1 MHz for emissions above 1 GHz
2. VBW \geq 3 x RBW
3. Span = 1.5 times the OBW
4. No. of sweep points > 2 x span / RBW
5. Detector = Peak
6. Trace mode = Max Hold
7. The trace was allowed to stabilize
8. Test channel : Low/ Middle/ High
9. Frequency range : We are performed all frequency to 10th harmonics from 9 kHz.

Test Note

1. Measurements value show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
 2. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test data
 3. For spurious emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.
- The spurious emissions is calculated by the following formula;


$$\text{Result (dBm)} = P_g \text{ (dBm)} - \text{cable loss (dB)} + \text{antenna gain (dBi)}$$

Where: P_g is the generator output power into the substitution antenna.

If the fundamental frequency is below 1 GHz, RF output power has been converted to EIRP.

$$\text{EIRP (dBm)} = \text{ERP (dBm)} + 2.15$$

3.4 PEAK- TO- AVERAGE RATIO

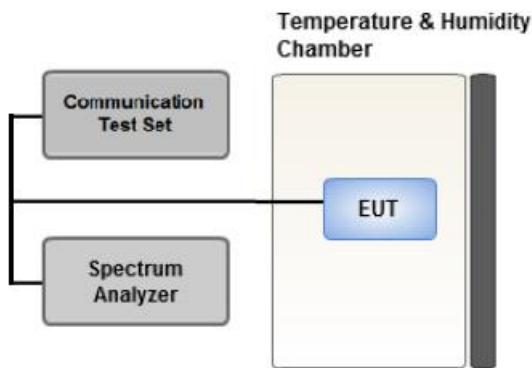

Test setup

① CCDF Procedure for PAPR

Test Settings

1. Set resolution/measurement bandwidth \geq signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Set the measurement interval as follows:
 - .- for continuous transmissions, set to 1 ms,
 - .- or burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
4. Record the maximum PAPR level associated with a probability of 0.1 %.

② Alternate Procedure for PAPR

Use one of the procedures presented in 5.2(ANSI C63.26-2015) to measure the total peak power and record as as P_{Pk} .

Use one of the applicable procedures presented 5.2(ANSI C63.26-2015) to measure the total average power and record as P_{Avg} . Determine the P.A.R. from:

$$P.A.R \text{ (dB)} = P_{Pk} \text{ (dBm)} - P_{Avg} \text{ (dBm)} \quad (P_{Avg} = \text{Average Power} + \text{Duty cycle Factor})$$

Test Settings(Peak Power)


The measurement instrument must have a RBW that is greater than or equal to the OBW of the signal to be measured and a VBW $\geq 3 \times$ RBW.

1. Set the RBW \geq OBW.
2. Set VBW $\geq 3 \times$ RBW.
3. Set span $\geq 2 \times$ OBW.
4. Sweep time $\geq 10 \times$ (number of points in sweep) \times (transmission symbol period).
5. Detector = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the peak amplitude level.

Test Settings(Average Power)

1. Set span to 2 \times to 3 \times the OBW.
2. Set RBW \geq OBW.
3. Set VBW $\geq 3 \times$ RBW.
4. Set number of measurement points in sweep $\geq 2 \times$ span / RBW.
5. Sweep time:
Set $\geq [10 \times (\text{number of points in sweep}) \times (\text{transmission period})]$ for single sweep
(automation-compatible) measurement. The transmission period is the (on + off) time.
6. Detector = power averaging (rms).
7. Set sweep trigger to "free run."
8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. (To accurately determine the average power over the on and off period of the transmitter, it can be necessary to increase the number of traces to be averaged above 100 or, if using a manually configured sweep time, increase the sweep time.)
9. Use the peak marker function to determine the maximum amplitude level.
10. Add $[10 \log (1/\text{duty cycle})]$ to the measured maximum power level to compute the average power during continuous transmission. For example, add $[10 \log (1/0.25)] = 6 \text{ dB}$ if the duty cycle is a constant 25 %.

3.5 OCCUPIED BANDWIDTH.

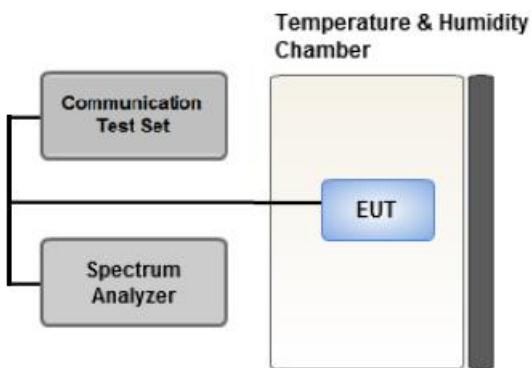

Test setup

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

The EUT makes a call to the communication simulator.


The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99 % occupied bandwidth and the 26 dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5 % of the expected OBW
3. VBW \geq 3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5 % of the 99% occupied bandwidth observed in Step 7

3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL

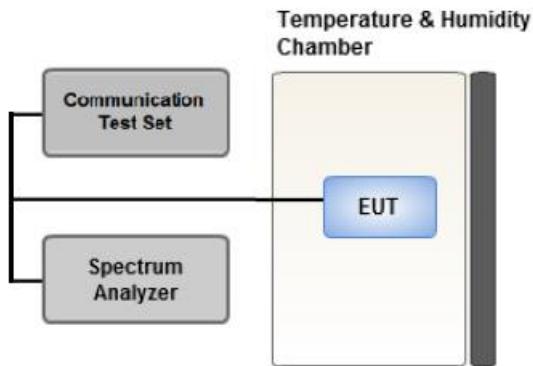

Test setup


Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. RBW = 1 MHz
2. VBW \geq 3 MHz
3. Detector = RMS
4. Trace Mode = trace average
5. Sweep time = auto
6. Number of points in sweep \geq 2 x Span / RBW

3.7 BAND EDGE

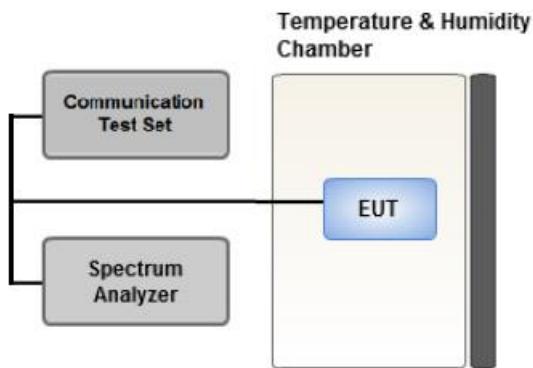

Test setup

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW > 1 % of the emission bandwidth
4. VBW > 3 x RBW
5. Detector = RMS
6. Number of sweep points $\geq 2 \times \text{Span}/\text{RBW}$
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Notes


According to FCC 22.917, 24.238, 27.53 specified that power of any emission outside of The authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

All measurements were done at 2 channels(low and high operational frequency range.)

The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

Where Margin < 1 dB the emission level is either corrected by $10 \log(1 \text{ MHz} / \text{RB})$ or the emission is integrated over a 1 MHz bandwidth to determine the final result. When using the integration method the integration window is either centered on the emission or, for emissions at the band edge, centered by an offset of 500 kHz from the block edge so that the integration window is the 1 MHz adjacent to the block edge.

3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

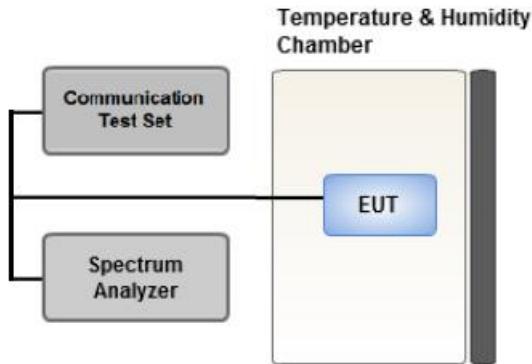

Test setup

Test Overview

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015.

The frequency stability of the transmitter is measured by:

1. Temperature:

The temperature is varied from -30 °C to +50 °C in 10 °C increments using an environmental chamber.

2. Primary Supply Voltage:


.- Unless otherwise specified, vary primary supply voltage from 85 % to 115 % of the nominal value for other than hand carried battery equipment.

.- For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20 °C to provide a reference).
2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10 °C intervals ranging from -30 °C to +50 °C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

3.9 Adjacent Channel Leakage Ratio

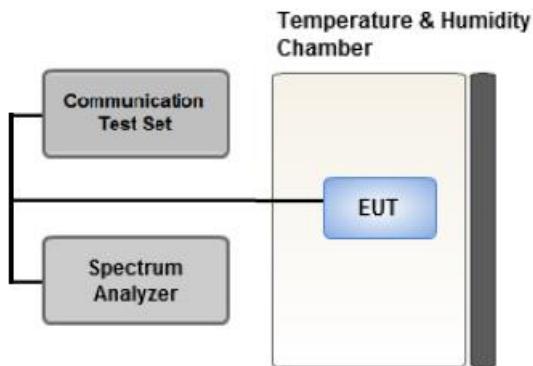

Test setup

Test Settings

1. Use ACP measurement function of Spectrum analyzer to measure adjacent channel leakage ratio
2. Integ BW = Assigned channel bandwidth
5. Detector = RMS
6. Number of sweep points $\geq 2 \times \text{Span}/\text{RBW}$
7. Trace mode = trace average
8. Sweep time = 1 s
9. The trace was allowed to stabilize

Test Notes

the Adjacent Channel Leakage Ratio for End User Devices shall be at least 30 dB.

4. LIST OF TEST EQUIPMENT

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
H.P.F	FBSR-02B(WHK1.2/15 G-10EF)	T&M SYSTEM	-	01/19/2024	Annual
H.P.F	FBSR-02B(WHK3.3/18 G-10EF)	T&M SYSTEM	-	01/19/2024	Annual
Power Splitter(DC ~ 26.5 GHz)	11667B	Hewlett Packard	5001	04/19/2024	Annual
DC Power Supply	E3632A	Agilent	MY40010147	06/21/2023	Annual
Dipole Antenna	UHAP	Schwarzbeck	557	03/09/2025	Biennial
Dipole Antenna	UHAP	Schwarzbeck	558	03/09/2025	Biennial
Chamber	SU-642	ESPEC	93008124	02/22/2024	Annual
Horn Antenna(1 ~ 18 GHz)	BBHA 9120D	Schwarzbeck	147	08/30/2023	Biennial
Horn Antenna(1 ~ 18 GHz)	BBHA 9120D	Schwarzbeck	9120D-1298	09/15/2023	Biennial
Horn Antenna(15 ~ 40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170342	09/29/2024	Biennial
Horn Antenna(15 ~ 40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170124	03/28/2025	Biennial
Signal Analyzer(10 Hz ~ 26.5 GHz)	N9020A	Agilent	MY52090906	04/20/2024	Annual
ATTENUATOR(20 dB)	8493C	Hewlett Packard	17280	04/19/2024	Annual
Spectrum Analyzer(10 Hz ~ 40 GHz)	FSV40	REOHDE & SCHWARZ	100931	08/29/2023	Annual
Base Station	8960 (E5515C)	Agilent	MY48360800	08/18/2023	Annual
Loop Antenna(9 kHz ~ 30 MHz)	FMZB1513	Schwarzbeck	1513-333	03/17/2024	Biennial
Trilog Broadband Antenna	VULB9168	Schwarzbeck	895	08/16/2024	Biennial
Trilog Broadband Antenna	VULB9168	Schwarzbeck	1135	03/21/2024	Biennial
Wideband Radio Communication Tester	MT8821C	Anritsu Corp.	6262094331	12/01/2023	Annual
Wideband Radio Communication Tester	MT8820C	Anritsu Corp.	6201026545	01/05/2024	Annual
SIGNAL GENERATOR (100 kHz ~ 40 GHz)	SMB100A	REOHDE & SCHWARZ	177633	07/05/2023	Annual
Signal Analyzer(5 Hz ~ 40.0 GHz)	N9030B	KEYSIGHT	MY55480167	05/30/2023	Annual
FCC LTE Mobile Conducted RF Automation Test Software	-	HCT CO., LTD.,	-	-	-

Note:

1. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
2. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

5. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014.

All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty (\pm dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.90 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (9 kHz ~ 30 MHz)	4.14 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (30 MHz ~ 1 GHz)	5.82 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (1 GHz ~ 18 GHz)	5.74 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (18 GHz ~ 40 GHz)	5.76 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (Above 40 GHz)	5.52 (Confidence level about 95 %, $k=2$)

6. SUMMARY OF TEST RESULTS

6.1 Test Condition : Conducted Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Occupied Bandwidth	§2.1049	N/A	PASS
Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	§2.1051, §96.41(e)	<ul style="list-style-type: none"> ■ -13 dBm/MHz at frequencies within 0-10 MHz of channel edge ■ -25 dBm/MHz at frequencies greater than 10 MHz above and below channel edge ■ -40 dBm/MHz at frequencies below 3530 MHz and above 3720 MHz 	PASS
Adjacent Channel Leakage Ratio	§96.41(e)	At least 30 dB.	PASS
Conducted Output Power	§2.1046	N/A	PASS
Frequency stability / variation of ambient temperature	§2.1055,	Emission must remain in band	PASS

6.2 Test Condition : Radiated Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Equivalent Isotropic Radiated Power	§96.41(b)	23 dBm/10 MHz	PASS
Radiated Spurious and Harmonic Emissions	§2.1053, §96.41(e)	-40 dBm/MHz	PASS

7. SAMPLE CALCULATION

7.1 ERP Sample Calculation

Ch./ Freq.		Measured Level(dBm)	Substitute Level(dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
channel	Freq.(MHz)						W	dBm
128	824.20	-21.37	38.40	-10.61	0.95	H	0.483	26.84

ERP = Substitute LEVEL(dBm) + Ant. Gain – CL(Cable Loss)

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power.

7.2 EIRP Sample Calculation

Ch./ Freq.		Measured Level(dBm)	Substitute Level(dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
channel	Freq.(MHz)						W	dBm
20175	1,732.50	-15.75	18.45	9.90	1.76	H	0.456	26.59

EIRP = Substitute LEVEL(dBm) + Ant. Gain – CL(Cable Loss)

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of equivalent isotropic radiated power.

7.3. Emission Designator**GSM Emission Designator****Emission Designator = 249KGXW**

GSM BW = 249 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

EDGE Emission Designator**Emission Designator = 249KG7W**

GSM BW = 249 kHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination (Audio/Data)

WCDMA Emission Designator**Emission Designator = 4M17F9W**

WCDMA BW = 4.17 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

QPSK Modulation**Emission Designator = 4M48G7D**

LTE BW = 4.48 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

QAM Modulation

Emission Designator = 4M48W7D

LTE BW = 4.48 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

8. TEST DATA

Test Overview

The EUT is set up to transmit two contiguous LTE channels. The power level of both carriers and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Note

1. All tests were evaluated for the two contiguous channels using various combinations of RB size, RB offset, modulation, and channel bandwidth.
2. Channel bandwidth is shown in the tables below based only on the channel bandwidths that were supported in this device.

Channel Bandwidth (PCC)	Channel Bandwidth (SCC)	Maximum aggregated bandwidth (MHz)
5	20	25
10	20	30
15	20	35
20	5	25
20	10	30
20	15	35
20	20	40

3. All modes of operation were investigated and the worst case configuration results are reported in this section.

Please refer to the table below.

- Worst case(Conducted Spurious Emissions, BandEdge)

: We have selected higher of the Conduction Output Power.

- Worst case(Radiated Spurious Emissions) : We have selected higher of the EIRP.

- Worst case(OBW, PAR, Frequency stability)

: All modes of operation were investigated and the worst case configuration results are reported.

[Worst case]

Test Description	Mod	Operating frequency	PCC					SCC				
			BW (MHz)	Freq. (MHz)	Ch.	RB	BW Offset	(MHz)	Freq. (MHz)	Ch.	RB	RB Offset
Conducted Spurious Emissions/ Band Edge	16QAM	Low	20	3560.0	55340	1	99	20	3579.8	55538	1	0
		Mid	20	3617.6	55916	1	99	15	3634.7	56087	1	0
		High	20	3670.2	56442	1	99	20	3690.0	56640	1	0
		Low	20	3560.0	55340	1	0	20	3579.8	55538	1	99
		Mid	20	3617.6	55916	1	0	15	3634.7	56087	1	74
		High	20	3670.2	56442	1	0	20	3690.0	56640	1	99
		Low	20	3560.0	55340	100	0	20	3579.8	55538	100	0
		Mid	5	3615.8	55898	25	0	20	3627.5	56015	100	0
		High	20	3670.2	56442	100	0	20	3690.0	56640	100	0
		Mid	20	3615.1	55891	100	0	20	3634.9	56089	100	0
Radiated Spurious Emissions	16QAM	Low	20	3560.0	55340	1	99	20	3579.8	55538	1	0
		Mid	20	3615.1	55891	1	99	20	3634.9	56089	1	0
		High	20	3670.2	56442	1	99	20	3690.0	56640	1	0

[Worst case]

Test Description	Mod	Operating frequency	PCC					SCC				
			BW (MHz)	Freq. (MHz)	Ch.	RB	RB Offset	BW (MHz)	Freq. (MHz)	Ch.	RB	RB Offset
OBW, PAR	QPSK, 16QAM 64QAM 256QA M	Mid	5	3615.8	55898	25	0	20	3627.5	56015	100	0
			10	3615.6	55896	50	0	20	3630.0	56040	100	0
			15	3615.3	55893	75	0	20	3632.4	56064	100	0
			20	3622.5	55965	100	0	5	3634.2	56082	25	0
			20	3620.1	55941	100	0	10	3634.5	56085	50	0
			20	3617.6	55916	100	0	15	3634.7	56087	75	0
			20	3615.1	55891	100	0	20	3634.9	56089	100	0
Frequency stability	16QAM	Low	5	3553.3	55273	25	0	20	3565.0	55390	100	0
			10	3555.5	55295	50	0	20	3569.9	55439	100	0
			15	3557.8	55318	75	0	20	3574.9	55489	50	0
			20	3560.0	55340	100	0	20	3579.8	55538	100	0
		High	5	3678.3	56523	25	0	20	3690.0	56640	100	0
			10	3675.6	56496	50	0	20	3690.0	56640	100	0
			15	3672.9	56469	75	0	20	3690.0	56640	50	0
			20	3670.2	56442	100	0	20	3690.0	56640	100	0

8.1 Conducted Power

Operating frequency	PCC					SCC					Conducted. Power [dBm]
	Bandwidth [MHz]	Freq. (MHz)	Channel	RB	RB Offset	Bandwidth [MHz]	Freq. (MHz)	Channel	RB	RB Offset	
Low	5	3553.3	55273	1	24	20	3565.0	55390	1	0	16.43
	10	3555.5	55295	1	49	20	3569.9	55439	1	0	15.80
	15	3557.8	55318	1	74	20	3574.9	55489	1	0	15.79
	20	3560.0	55340	1	99	5	3571.7	55457	1	0	16.83
	20	3560.0	55340	1	99	10	3574.4	55484	1	0	15.81
	20	3560.0	55340	1	99	15	3577.1	55511	1	0	15.78
	20	3560.0	55340	1	99	20	3579.8	55538	1	0	17.28
Mid	5	3615.8	55898	1	24	20	3627.5	56015	1	0	20.12
	10	3615.6	55896	1	49	20	3630.0	56040	1	0	20.58
	15	3615.3	55893	1	74	20	3632.4	56064	1	0	21.06
	20	3622.5	55965	1	99	5	3634.2	56082	1	0	19.95
	20	3620.1	55941	1	99	10	3634.5	56085	1	0	20.38
	20	3617.6	55916	1	99	15	3634.7	56087	1	0	21.13
	20	3615.1	55891	1	99	20	3634.9	56089	1	0	21.06
High	5	3678.3	56523	1	24	20	3690.0	56640	1	0	16.51
	10	3675.6	56496	1	49	20	3690.0	56640	1	0	16.00
	15	3672.9	56469	1	74	20	3690.0	56640	1	0	15.87
	20	3685.0	56590	1	99	5	3696.7	56707	1	0	16.79
	20	3680.1	56541	1	99	10	3694.5	56685	1	0	15.79
	20	3675.1	56491	1	99	15	3692.2	56662	1	0	15.78
	20	3670.2	56442	1	99	20	3690.0	56640	1	0	17.35

Note:

Modulation : QPSK(1RB)

Operating frequency	PCC					SCC					Conducted Power [dBm]
	Bandwidth [MHz]	Freq. (MHz)	Channel	RB	RB Offset	Bandwidth [MHz]	Freq. (MHz)	Channel	RB	RB Offset	
Low	5	3553.3	55273	25	0	20	3565.0	55390	100	0	9.95
	10	3555.5	55295	50	0	20	3569.9	55439	100	0	10.93
	15	3557.8	55318	75	0	20	3574.9	55489	100	0	10.95
	20	3560.0	55340	100	0	5	3571.7	55457	25	0	9.95
	20	3560.0	55340	100	0	10	3574.4	55484	50	0	10.95
	20	3560.0	55340	100	0	15	3577.1	55511	75	0	10.98
	20	3560.0	55340	100	0	20	3579.8	55538	100	0	11.00
Mid	5	3615.8	55898	25	0	20	3627.5	56015	100	0	18.24
	10	3615.6	55896	50	0	20	3630.0	56040	100	0	17.71
	15	3615.3	55893	75	0	20	3632.4	56064	100	0	17.72
	20	3622.5	55965	100	0	5	3634.2	56082	25	0	18.03
	20	3620.1	55941	100	0	10	3634.5	56085	50	0	17.55
	20	3617.6	55916	100	0	15	3634.7	56087	75	0	17.72
	20	3615.1	55891	100	0	20	3634.9	56089	100	0	17.72
High	5	3678.3	56523	25	0	20	3690.0	56640	100	0	10.14
	10	3675.6	56496	50	0	20	3690.0	56640	100	0	11.15
	15	3672.9	56469	75	0	20	3690.0	56640	100	0	11.14
	20	3685.0	56590	100	0	5	3696.7	56707	25	0	10.00
	20	3680.1	56541	100	0	10	3694.5	56685	50	0	11.08
	20	3675.1	56491	100	0	15	3692.2	56662	75	0	11.09
	20	3670.2	56442	100	0	20	3690.0	56640	100	0	11.16

Note:

Modulation : QPSK(Full RB)

Operating frequency	PCC					SCC					Conducted. Power [dBm]
	Bandwidth [MHz]	Freq. (MHz)	Channel	RB	RB Offset	Bandwidth [MHz]	Freq. (MHz)	Channel	RB	RB Offset	
Low	20	3560.0	55340	1	99	20	3579.8	55538	1	0	17.88
Mid	20	3617.6	55916	1	99	15	3634.7	56087	1	0	21.71
High	20	3670.2	56442	1	99	20	3690.0	56640	1	0	17.90
Low	20	3560.0	55340	100	0	20	3579.8	55538	100	0	11.02
Mid	5	3615.8	55898	25	0	20	3627.5	56015	100	0	18.30
High	20	3670.2	56442	100	0	20	3690.0	56640	100	0	11.21

Note:

Modulation : 16QAM

Operating frequency	PCC					SCC					Conducted. Power [dBm]
	Bandwidth [MHz]	Freq. (MHz)	Channel	RB	RB Offset	Bandwidth [MHz]	Freq. (MHz)	Channel	RB	RB Offset	
Low	20	3560.0	55340	1	99	20	3579.8	55538	1	0	17.80
Mid	20	3617.6	55916	1	99	15	3634.7	56087	1	0	20.66
High	20	3670.2	56442	1	99	20	3690.0	56640	1	0	17.77
Low	20	3560.0	55340	100	0	20	3579.8	55538	100	0	11.00
Mid	5	3615.8	55898	25	0	20	3627.5	56015	100	0	18.28
High	20	3670.2	56442	100	0	20	3690.0	56640	100	0	11.19

Note:

Modulation : 64QAM

Operating frequency	PCC					SCC					Conducted. Power [dBm]
	Bandwidth [MHz]	Freq. (MHz)	Channel	RB	RB Offset	Bandwidth [MHz]	Freq. (MHz)	Channel	RB	RB Offset	
Low	20	3560.0	55340	1	99	20	3579.8	55538	1	0	17.00
Mid	20	3617.6	55916	1	99	15	3634.7	56087	1	0	17.50
High	20	3670.2	56442	1	99	20	3690.0	56640	1	0	17.10
Low	20	3560.0	55340	100	0	20	3579.8	55538	100	0	10.99
Mid	5	3615.8	55898	25	0	20	3627.5	56015	100	0	17.30
High	20	3670.2	56442	100	0	20	3690.0	56640	100	0	11.18

Note:

Modulation : 256QAM

8.2 Equivalent Isotropic Radiated Power

	PCC			SCC			Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L.	Pol.	E.I.R.P	
	BW [MHz]	Channel	RB/ Offset	BW [MHz]	Channel	RB/ Offset						W	dBm
Low	5	55273	1/24	20	55390	1/0	-31.04	7.36	12.38	3.07	H	0.046	16.67
	10	55295	1/49	20	55439	1/0	-31.45	6.95	12.38	3.07	H	0.042	16.26
	15	55318	1/74	20	55489	1/0	-31.20	7.20	12.37	3.05	H	0.045	16.52
	20	55340	1/99	5	55457	1/0	-29.89	8.51	12.37	3.05	H	0.061	17.83
	20	55340	1/99	10	55484	1/0	-31.24	7.16	12.37	3.05	H	0.044	16.48
	20	55340	1/99	15	55511	1/0	-31.09	7.31	12.36	3.03	H	0.046	16.64
	20	55340	1/99	20	55538	1/0	-29.53	8.87	12.36	3.03	H	0.066	18.20
Mid	5	55898	1/24	20	56015	1/0	-26.92	11.67	12.26	3.17	H	0.119	20.76
	10	55896	1/49	20	56040	1/0	-26.36	12.23	12.26	3.17	H	0.136	21.32
	15	55893	1/74	20	56064	1/0	-26.73	11.78	12.25	3.16	H	0.122	20.87
	20	55965	1/99	5	56082	1/0	-27.35	11.07	12.24	3.15	H	0.104	20.16
	20	55941	1/99	10	56085	1/0	-26.70	11.81	12.25	3.16	H	0.123	20.90
	20	55916	1/99	15	56087	1/0	-26.05	12.46	12.25	3.16	H	0.143	21.55
	20	55891	1/99	20	56089	1/0	-25.97	12.54	12.25	3.16	H	0.145	21.63
High	5	56523	1/24	20	56640	1/0	-32.25	6.43	12.27	3.07	H	0.037	15.63
	10	56496	1/49	20	56640	1/0	-33.05	5.52	12.26	3.07	H	0.030	14.71
	15	56469	1/74	20	56640	1/0	-32.83	5.74	12.26	3.07	H	0.031	14.93
	20	56590	1/99	5	56707	1/0	-32.47	6.30	12.28	3.06	H	0.036	15.52
	20	56541	1/99	10	56685	1/0	-33.66	5.02	12.27	3.07	H	0.026	14.22
	20	56491	1/99	15	56662	1/0	-32.69	5.99	12.27	3.07	H	0.033	15.19
	20	56442	1/99	20	56640	1/0	-31.24	7.33	12.26	3.07	H	0.045	16.52

Note:

1. Modulation : QPSK
2. Limit : < 23 dBm

PCC			SCC			Measured	Substitute	Ant.	C.L.	Pol.	E.I.R.P	
BW [MHz]	Channel	RB/Offset	BW [MHz]	Channel	RB/Offset						W	dBm
20	55340	1/99	20	55538	1/0	-29.24	9.16	12.36	3.03	H	0.071	18.49
5	55898	1/24	20	56015	1/0	-26.83	11.76	12.26	3.17	H	0.122	20.85
10	55896	1/49	20	56040	1/0	-26.21	12.38	12.26	3.17	H	0.140	21.47
15	55893	1/74	20	56064	1/0	-25.87	12.64	12.25	3.16	H	0.149	21.73
20	55965	1/99	5	56082	1/0	-27.24	11.18	12.24	3.15	H	0.106	20.27
20	55941	1/99	10	56085	1/0	-26.61	11.90	12.25	3.16	H	0.126	20.99
20	55916	1/99	15	56087	1/0	-25.94	12.57	12.25	3.16	H	0.146	21.66
20	55891	1/99	20	56089	1/0	-25.75	12.76	12.25	3.16	H	0.153	21.85
20	56442	1/99	20	56640	1/0	-30.98	7.59	12.26	3.07	H	0.048	16.78

Note:

1. Modulation : 16QAM

2. Limit : < 23 dBm

PCC			SCC			Measured	Substitute	Ant.	C.L.	Pol.	E.I.R.P	
BW [MHz]	Channel	RB/Offset	BW [MHz]	Channel	RB/Offset						W	dBm
20	55340	1/99	20	55538	1/0	-29.56	8.84	12.36	3.03	H	0.066	18.17
5	55898	1/24	20	56015	1/0	-26.93	11.66	12.26	3.17	H	0.119	20.75
10	55896	1/49	20	56040	1/0	-26.94	11.65	12.26	3.17	H	0.119	20.74
15	55893	1/74	20	56064	1/0	-26.83	11.68	12.25	3.16	H	0.119	20.77
20	55965	1/99	5	56082	1/0	-27.47	10.95	12.24	3.15	H	0.101	20.04
20	55941	1/99	10	56085	1/0	-27.10	11.41	12.25	3.16	H	0.112	20.50
20	55916	1/99	15	56087	1/0	-26.85	11.66	12.25	3.16	H	0.119	20.75
20	55891	1/99	20	56089	1/0	-26.55	11.96	12.25	3.16	H	0.127	21.05
20	56442	1/99	20	56640	1/0	-31.52	7.05	12.26	3.07	H	0.042	16.24

Note:

1. Modulation : 64QAM

2. Limit : < 23 dBm

PCC			SCC			Measured	Substitute	Ant.	C.L.	Pol.	E.I.R.P	
BW [MHz]	Channel	RB/Offset	BW [MHz]	Channel	RB/Offset						W	dBm
20	55340	1/99	20	55538	1/0	-30.02	8.38	12.36	3.03	H	0.059	17.71
5	55898	1/24	20	56015	1/0	-30.05	8.54	12.26	3.17	H	0.058	17.63
10	55896	1/49	20	56040	1/0	-30.06	8.53	12.26	3.17	H	0.058	17.62
15	55893	1/74	20	56064	1/0	-29.91	8.60	12.25	3.16	H	0.059	17.69
20	55965	1/99	5	56082	1/0	-30.47	7.95	12.24	3.15	H	0.051	17.04
20	55941	1/99	10	56085	1/0	-30.13	8.38	12.25	3.16	H	0.056	17.47
20	55916	1/99	15	56087	1/0	-29.84	8.67	12.25	3.16	H	0.060	17.76
20	55891	1/99	20	56089	1/0	-29.75	8.76	12.25	3.16	H	0.061	17.85
20	56442	1/99	20	56640	1/0	-31.60	6.97	12.26	3.07	H	0.041	16.16

Note:

1. Modulation : 256QAM

2. Limit : < 23 dBm

8.3 Conducted Spurious Emissions

Operating frequency	PCC				SCC				Measurement Maximum Frequency (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)
	BW [MHz]	Ch.	Freq. (MHz)	RB/Offset	BW [MHz]	Ch.	Freq. (MHz)	RB/Offset				
Low	20	55340	3560.0	1/99	20	55538	3579.8	1/0	3.8126	31.955	-78.31	-46.36
Mid	20	55916	3617.6	1/99	15	56087	3634.7	1/0	3.8316	31.955	-78.15	-46.19
High	20	56442	3670.2	1/99	20	56640	3690.0	1/0	3.8410	31.955	-77.62	-45.66
Low	20	55340	3560.0	1/0	20	55538	3579.8	1/99	3.8231	31.955	-77.27	-45.31
Mid	20	55916	3617.6	1/0	15	56087	3634.7	1/74	3.9078	31.955	-77.76	-45.81
High	20	56442	3670.2	1/0	20	56640	3690.0	1/99	3.8455	31.955	-77.98	-46.02
Low	20	55340	3560.0	100/0	20	55538	3579.8	100/0	3.8191	31.955	-77.96	-46.00
Mid	5	55898	3615.8	25/0	20	56015	3627.5	100/0	3.8161	31.955	-78.44	-46.49
High	20	56442	3670.2	100/0	20	56640	3690.0	100/0	7.2747	32.570	-78.60	-46.03
Mid	20	55891	3615.1	100/0	20	56089	3634.9	100/0	3.8420	31.955	-77.54	-45.59

Note:

1. Modulation : 16QAM
2. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
3. Duty Cycle factor already applied on the factor.
 - Duty Cycle factor(dB) = 3.979
 - Factor(dB) = Duty Cycle factor + Cable Loss + Ext. Attenuator + Power Splitter
 - Result(dBm) = Measurement Maximum Data (dBm) + Factor

Frequency Range (GHz)	Factor [dB]
0.03 – 1	29.249
1 – 5	31.955
5 – 10	32.570
10 – 15	33.095
15 – 20	33.468
Above 20	34.110

4. Limit : -40.0 dBm

Frequency Range : 30 MHz ~ 10 GHz


PCC 5 MHz Ch55898 RB25 Offset0 SCC 20 MHz Ch56015 RB100 Offset0




PCC 20 MHz Ch55340 RB1 Offset0 SCC 20 MHz Ch55538 RB1 Offset99




PCC 20 MHz Ch55340 RB1 Offset99 SCC 20 MHz Ch55538 RB1 Offset0

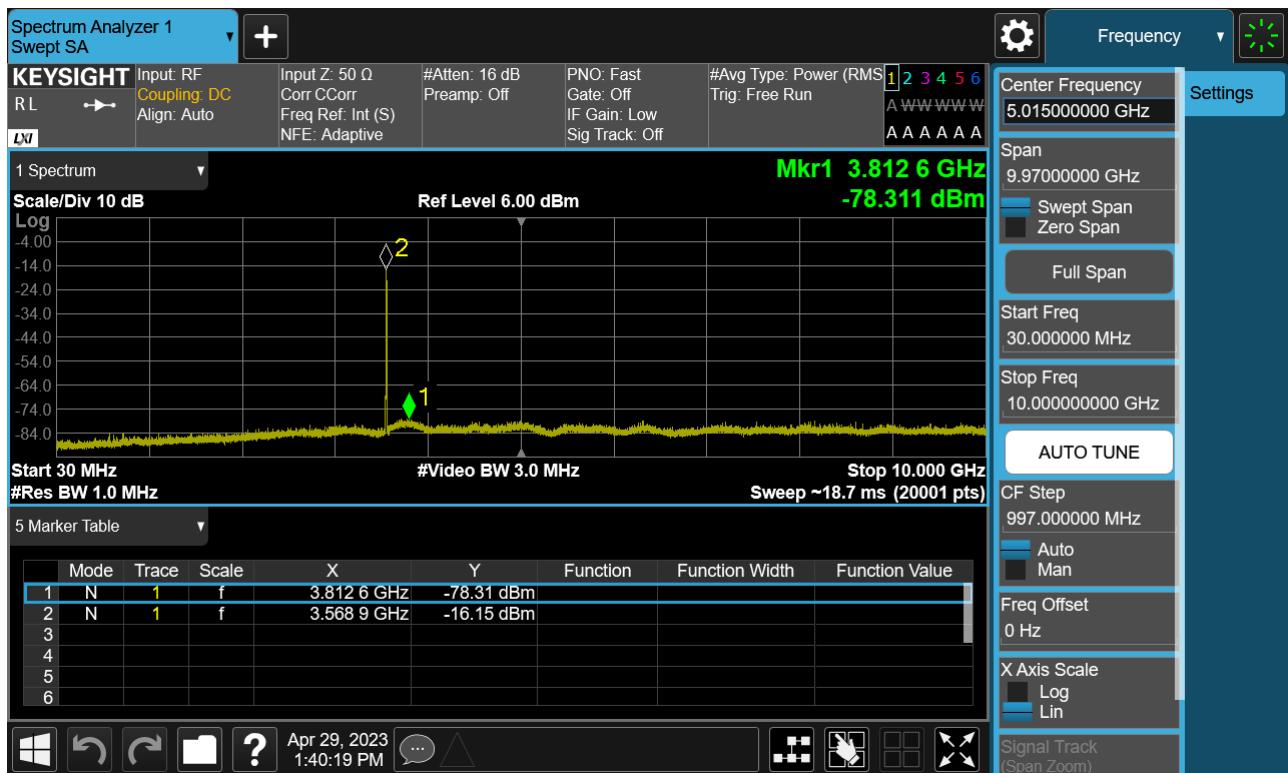


PCC 20 MHz Ch55340 RB100 Offset0 SCC 20 MHz Ch55538 RB100 Offset0

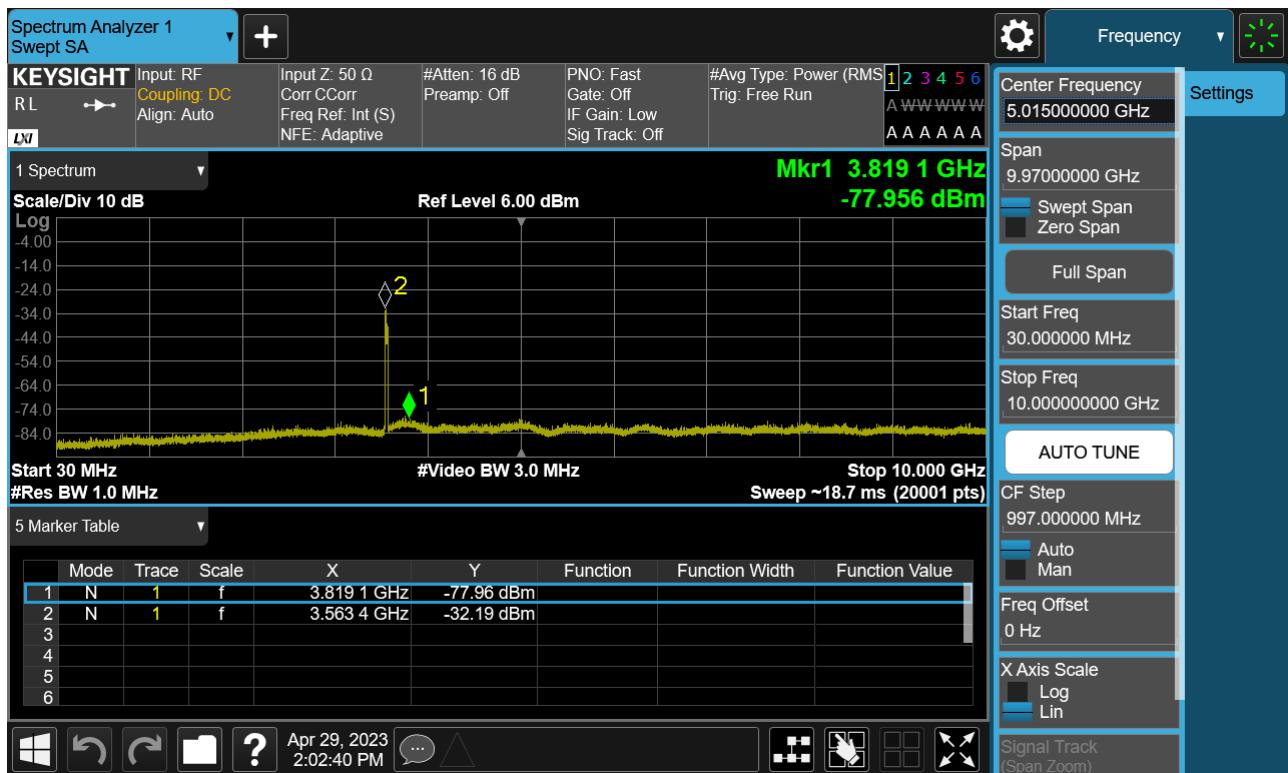

PCC 20 MHz Ch55891 RB100 Offset0 SCC 20 MHz Ch56089 RB100 Offset0

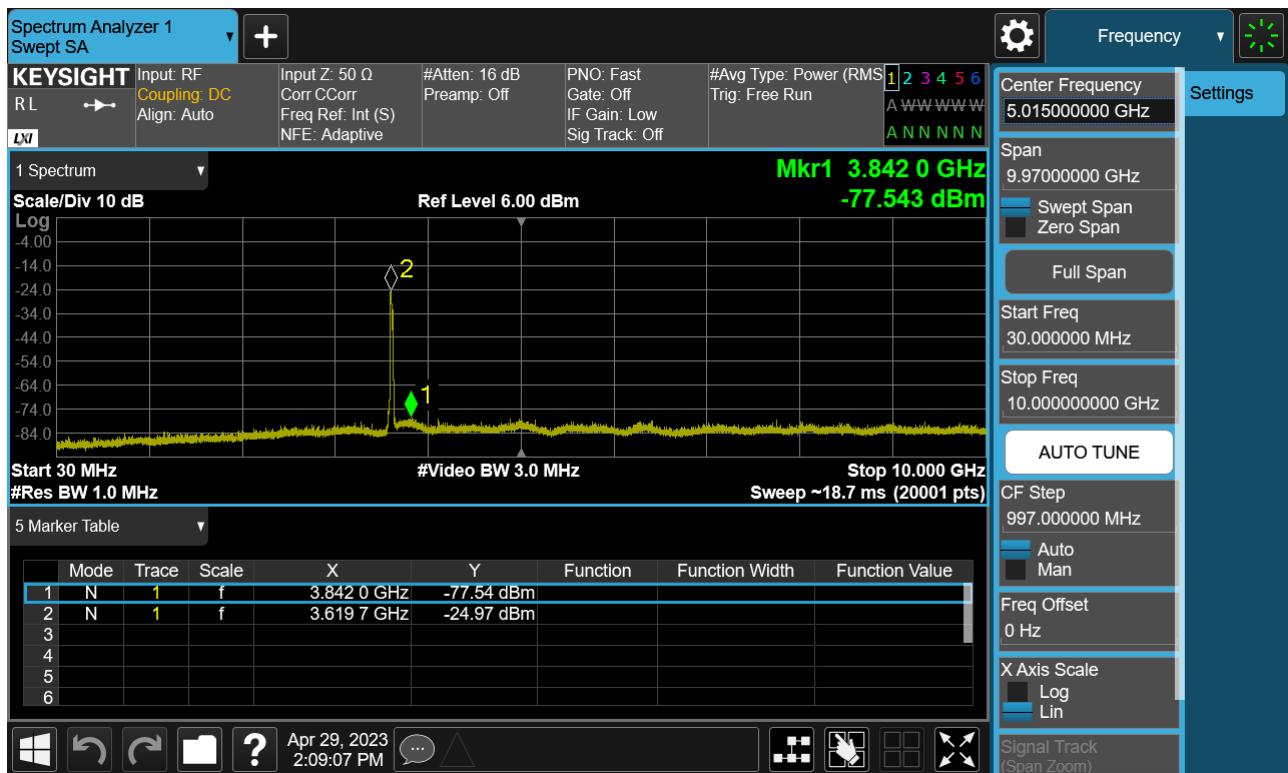


PCC 20 MHz Ch55916 RB1 Offset0 SCC 15 MHz Ch56087 RB1 Offset74

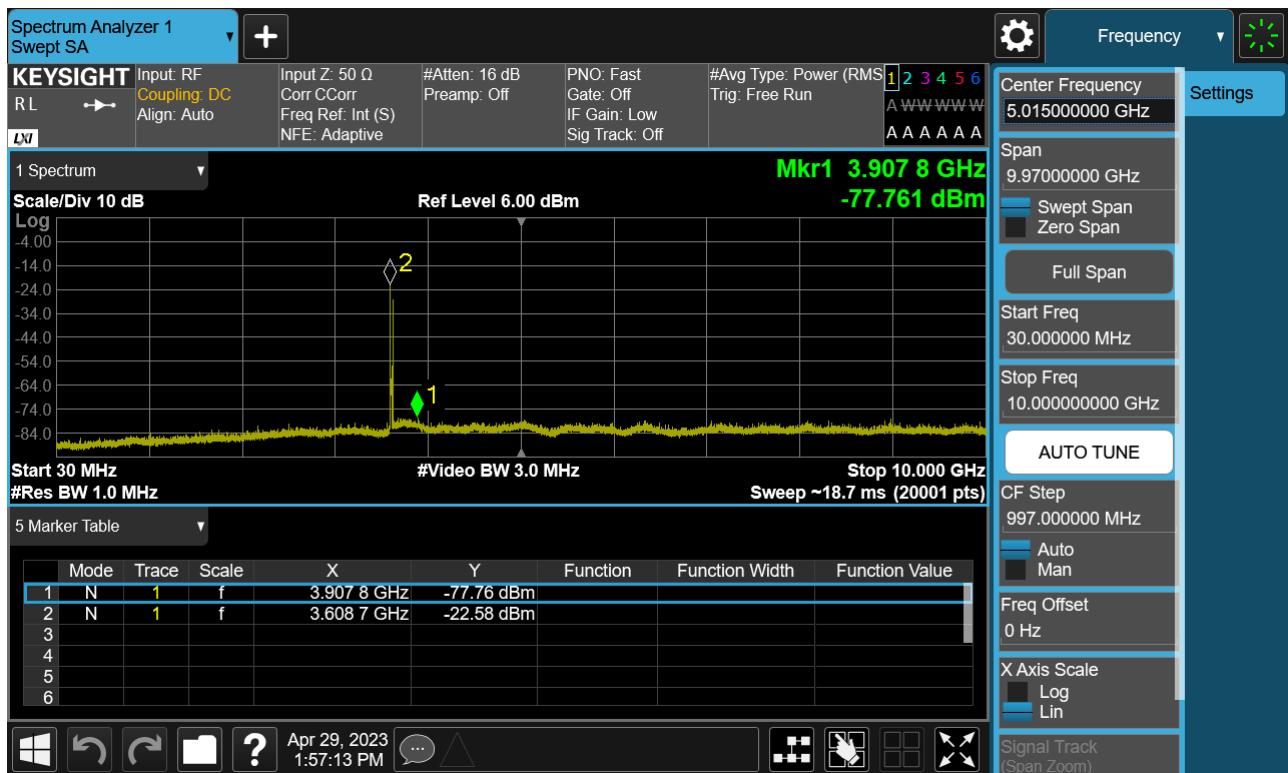


PCC 20 MHz Ch55916 RB1 Offset99 SCC 15 MHz Ch56087 RB1 Offset0




PCC 20 MHz Ch56442 RB1 Offset0 SCC 20 MHz Ch56640 RB1 Offset99

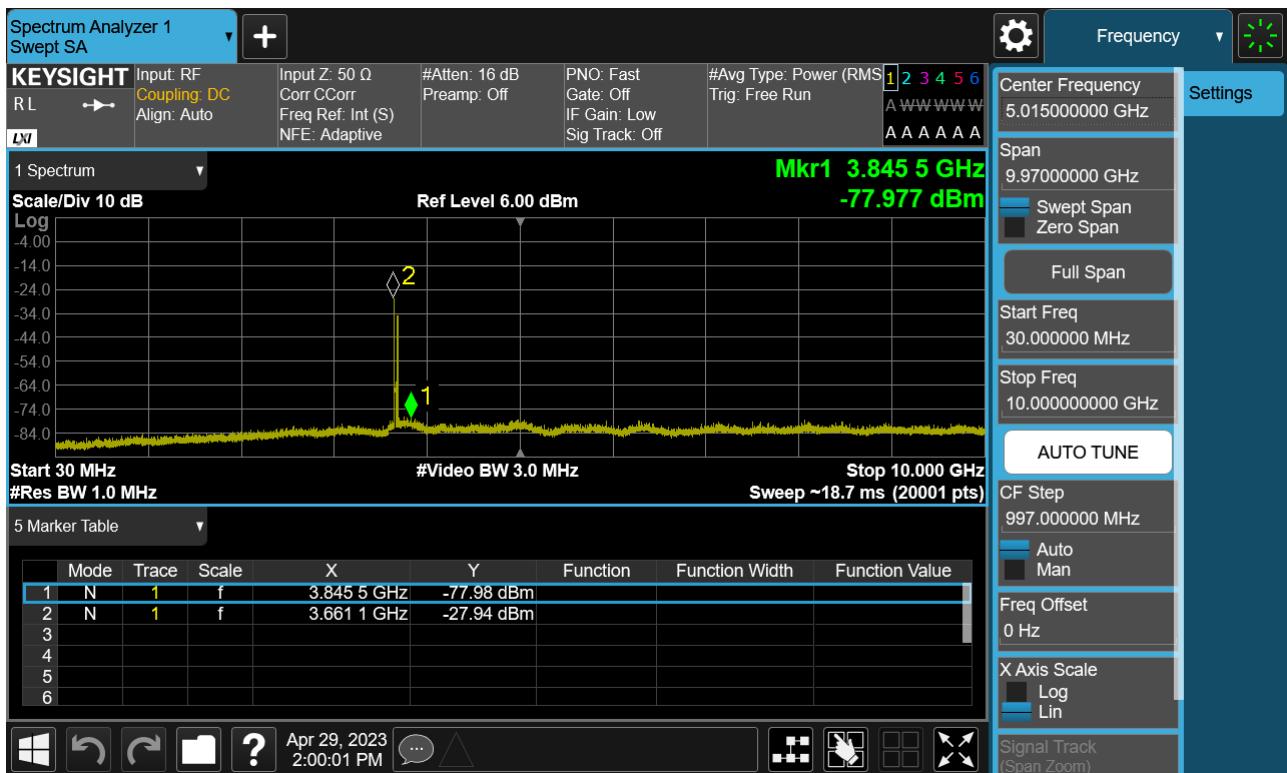

PCC 20 MHz Ch56442 RB1 Offset99 SCC 20 MHz Ch56640 RB1 Offset0

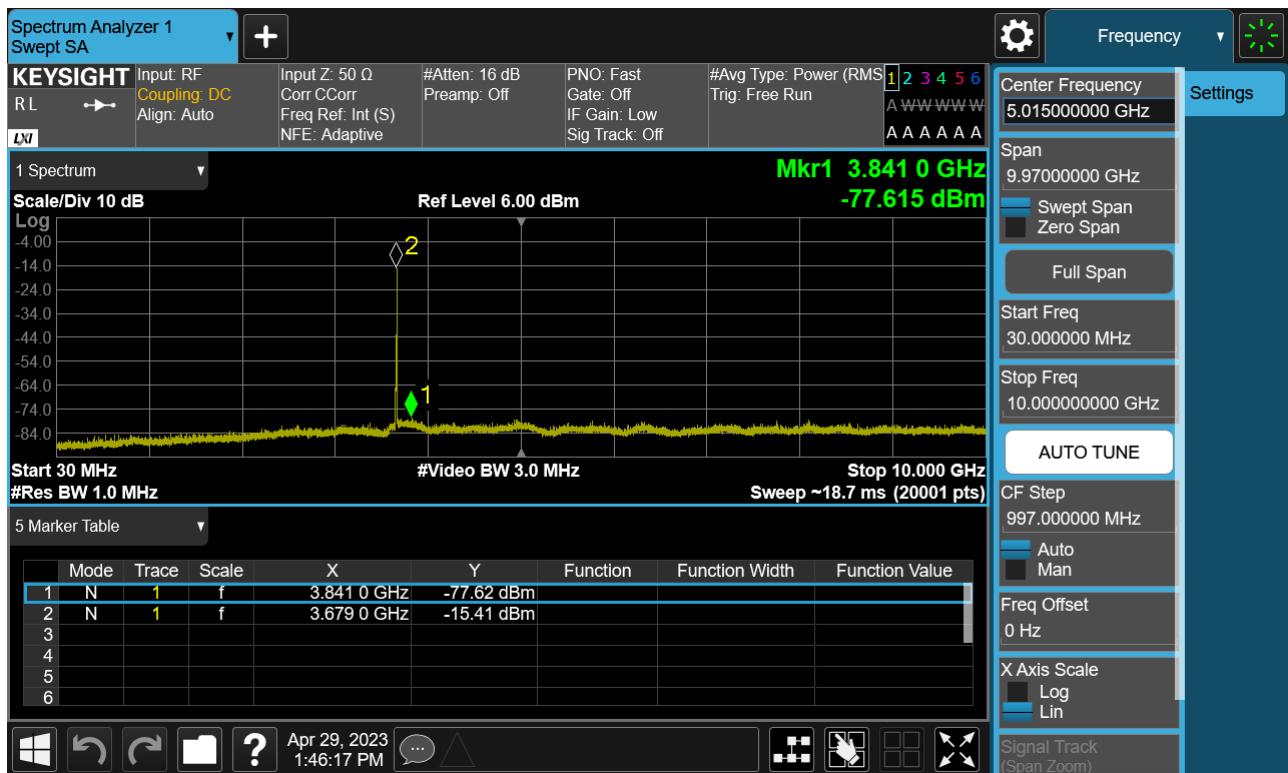


PCC 20 MHz Ch56442 RB100 Offset0 SCC 20 MHz Ch56640 RB100 Offset0

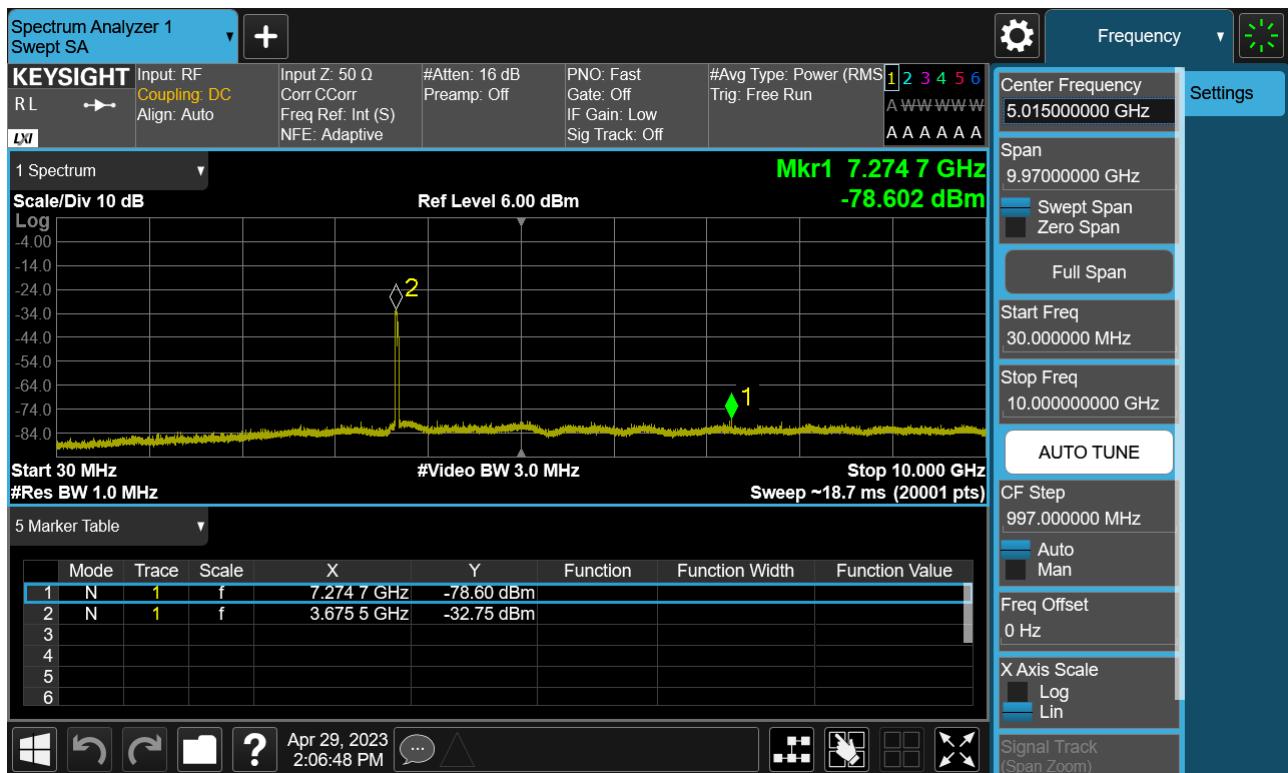

Frequency Range : 10 GHz ~ 26.5 GHz


PCC 5 MHz Ch55898 RB25 Offset0, SCC 20 MHz Ch56015 RB100 Offset0

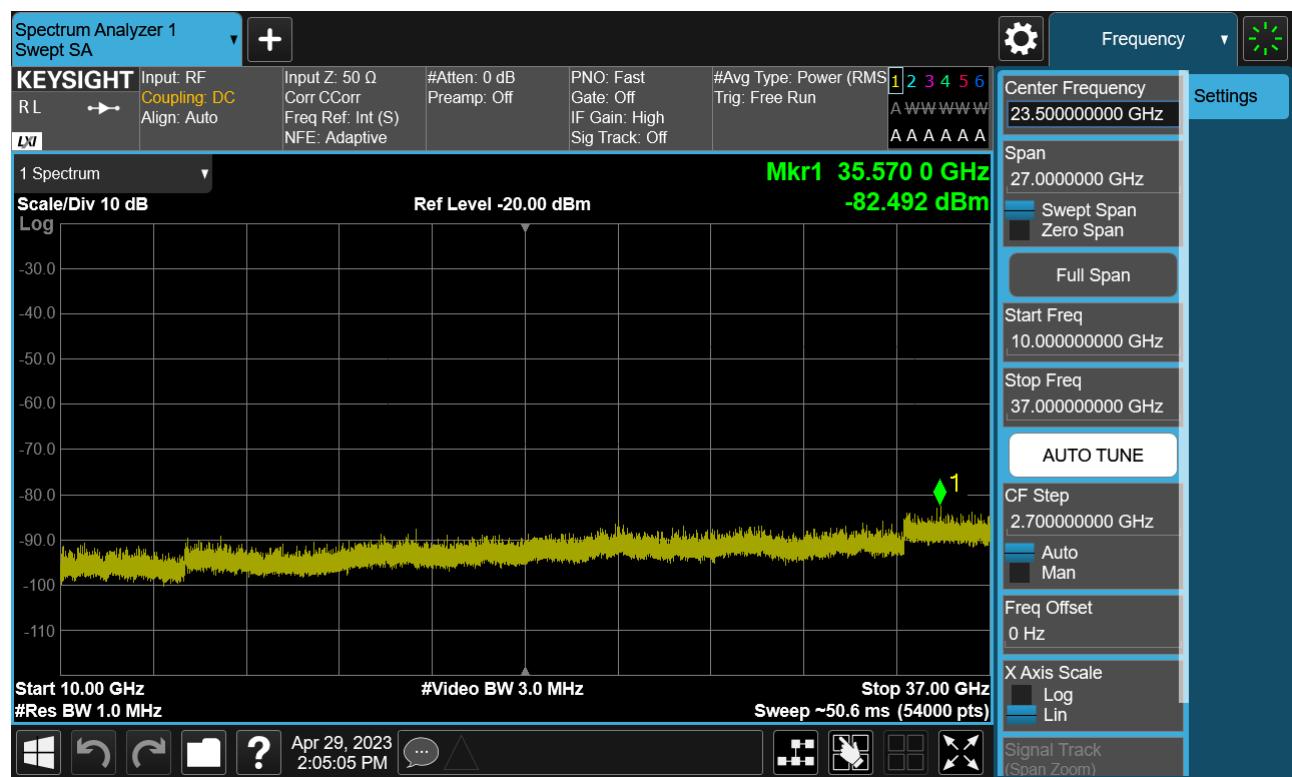


PCC 20 MHz Ch55340 RB1 Offset0, SCC 20 MHz Ch55538 RB1 Offset99




PCC 20 MHz Ch55340 RB1 Offset99, SCC 20 MHz Ch55538 RB1 Offset0

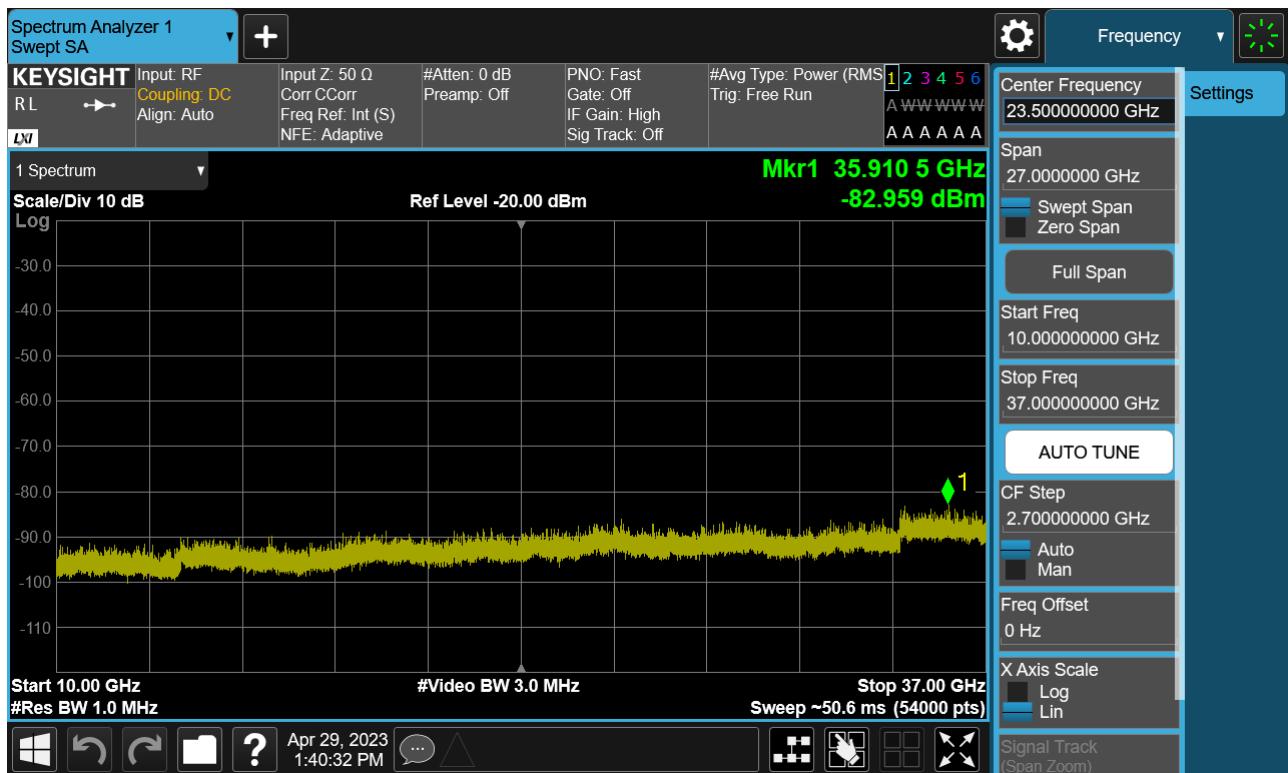


PCC 20 MHz Ch55340 RB100 Offset0, SCC 20 MHz Ch55538 RB100 Offset0

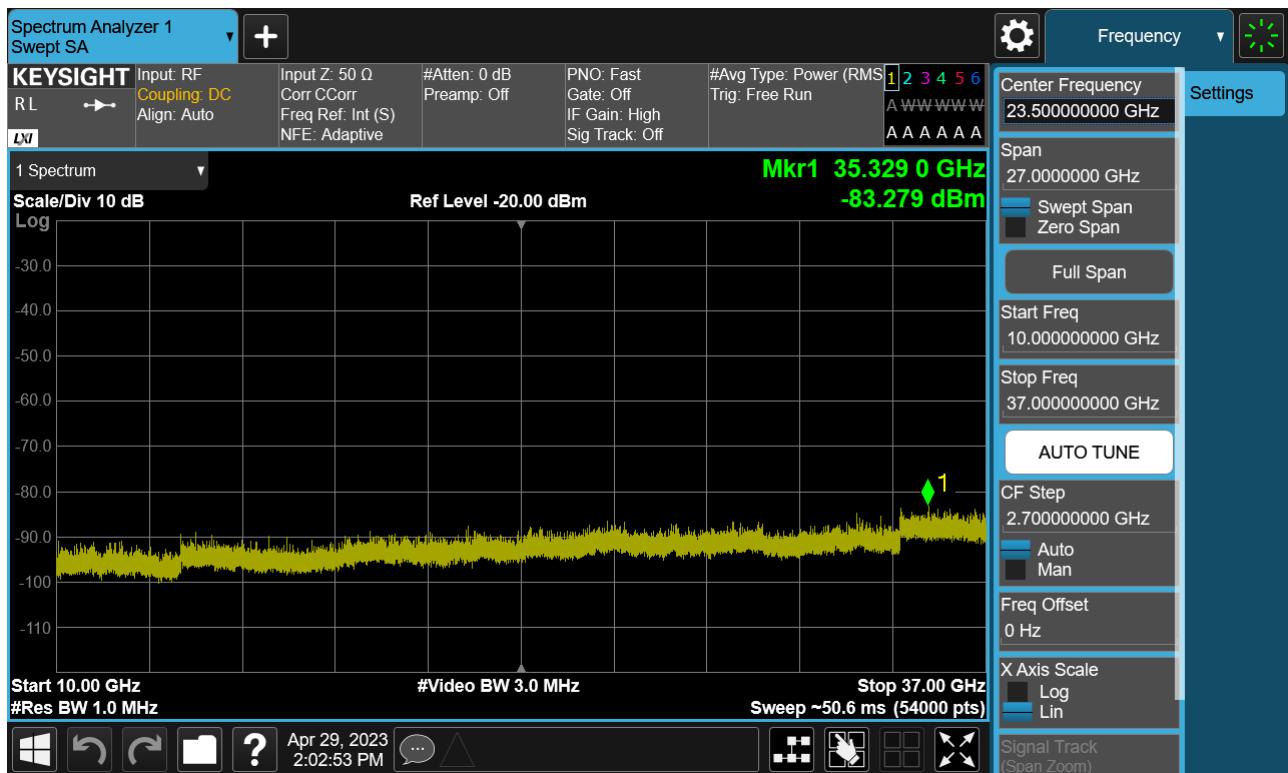


PCC 20 MHz Ch55891 RB100 Offset0, SCC 20 MHz Ch56089 RB100 Offset0

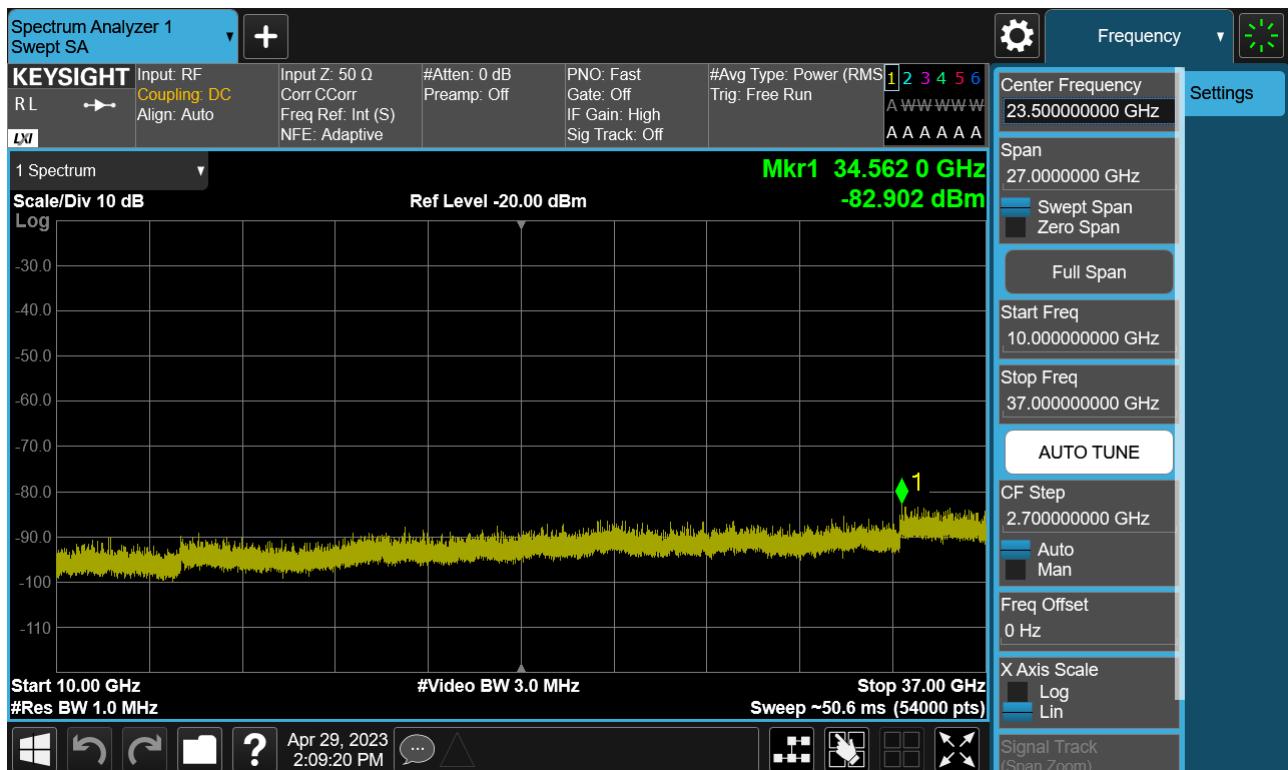


PCC 20 MHz Ch55916 RB1 Offset0, SCC 15 MHz Ch56087 RB1 Offset74

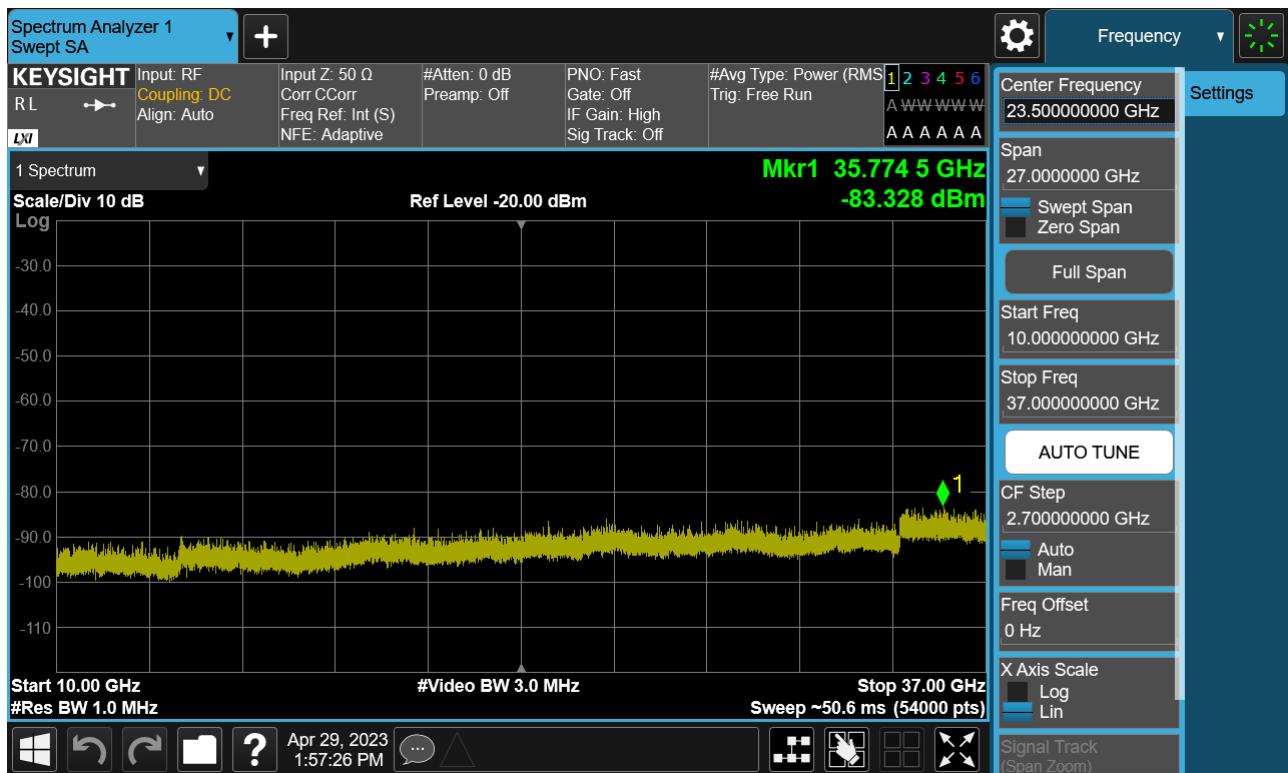


PCC 20 MHz Ch55916 RB1 Offset99, SCC 15 MHz Ch56087 RB1 Offset0

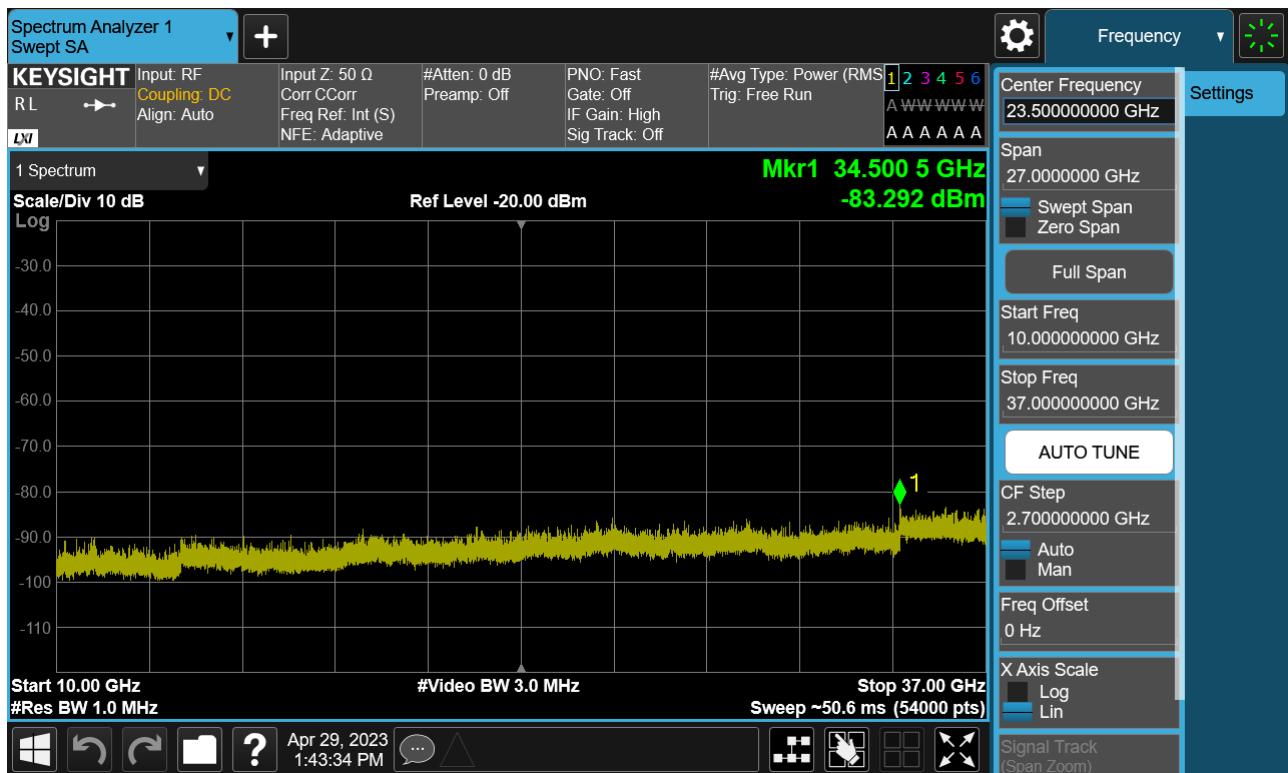


PCC 20 MHz Ch56442 RB1 Offset0, SCC 20 MHz Ch56640 RB1 Offset99

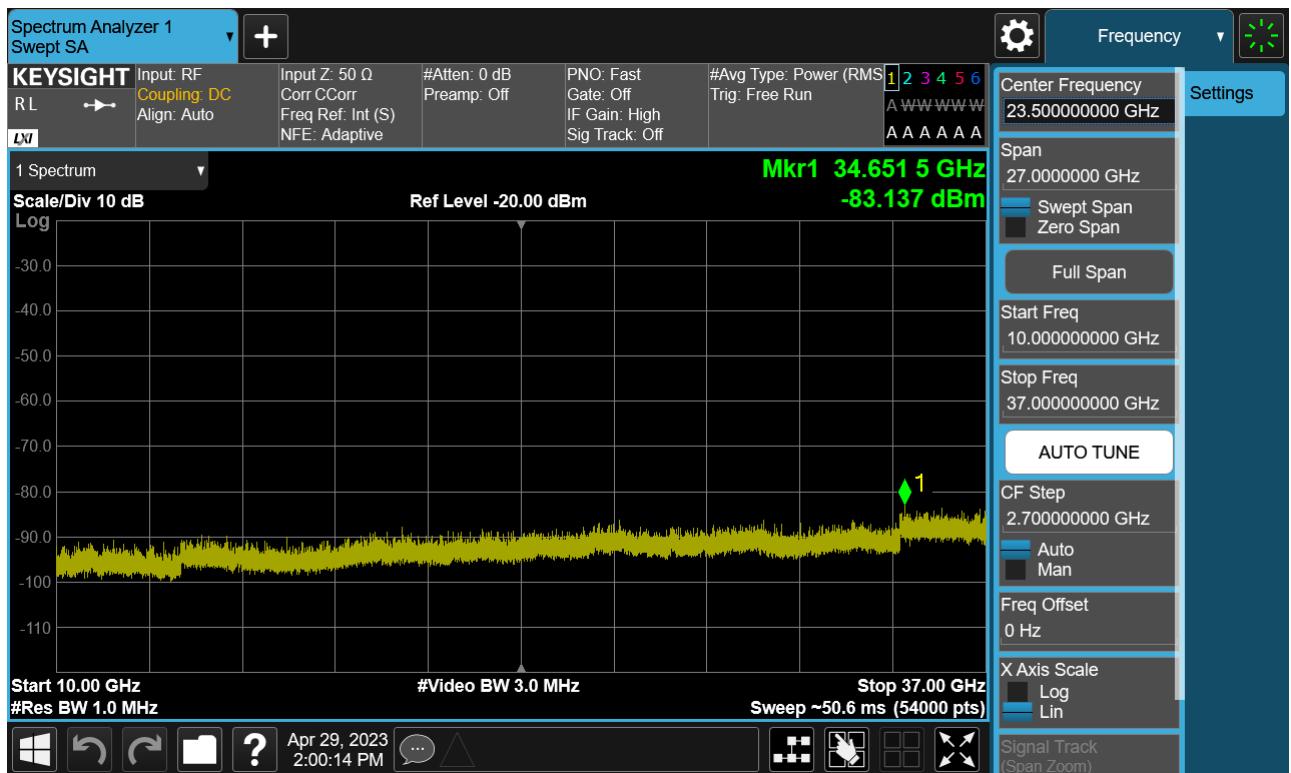


PCC 20 MHz Ch56442 RB1 Offset99, SCC 20 MHz Ch56640 RB1 Offset0

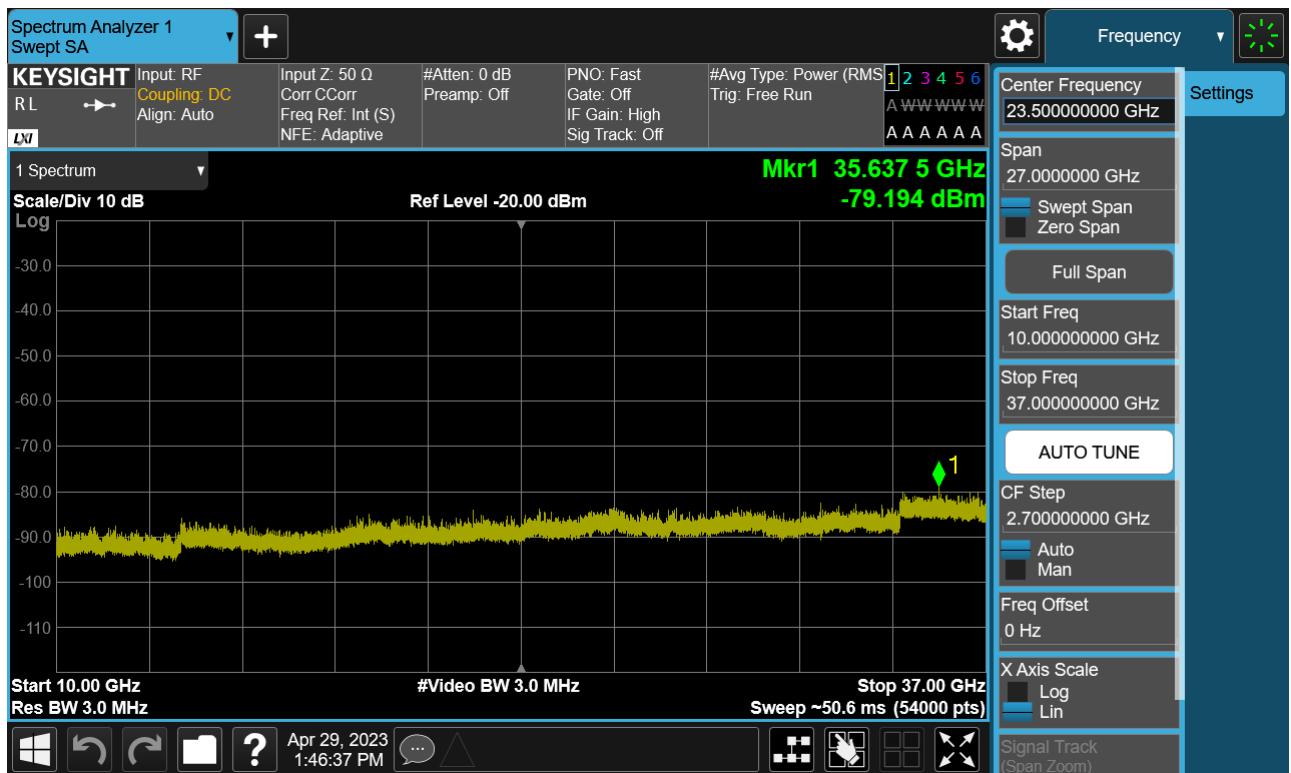


PCC 20 MHz Ch56442 RB100 Offset0, SCC 20 MHz Ch56640 RB100 Offset0

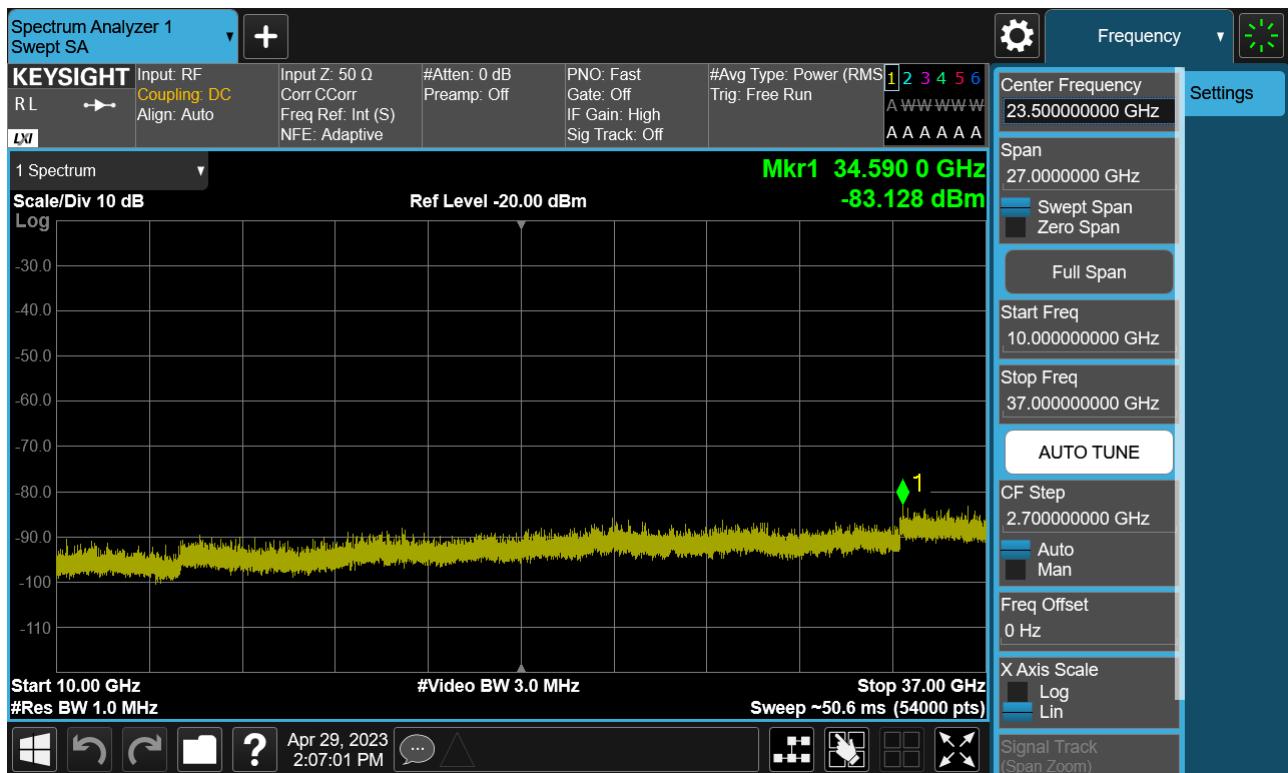


8.4 Channel Edge

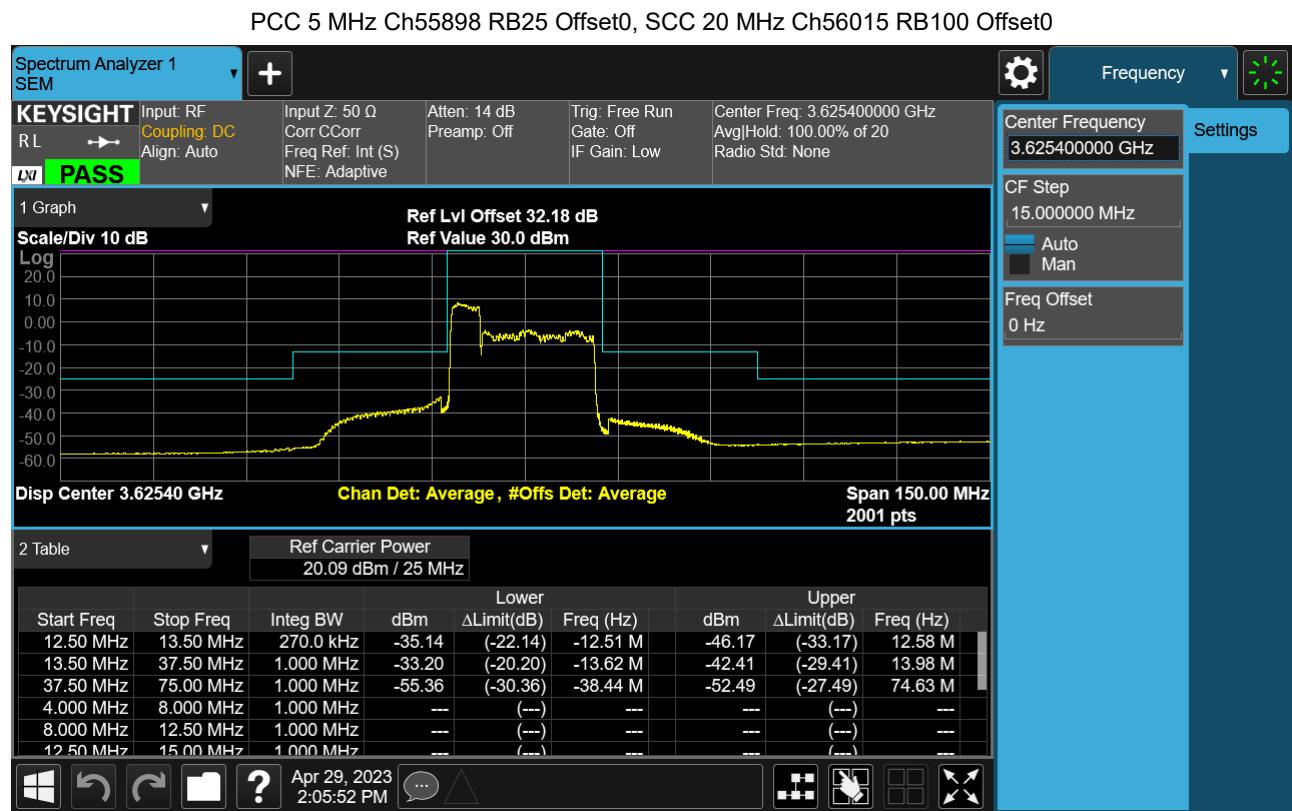


PCC 20 MHz Ch55340 RB1 Offset0, SCC 20 MHz Ch55538 RB1 Offset99-1

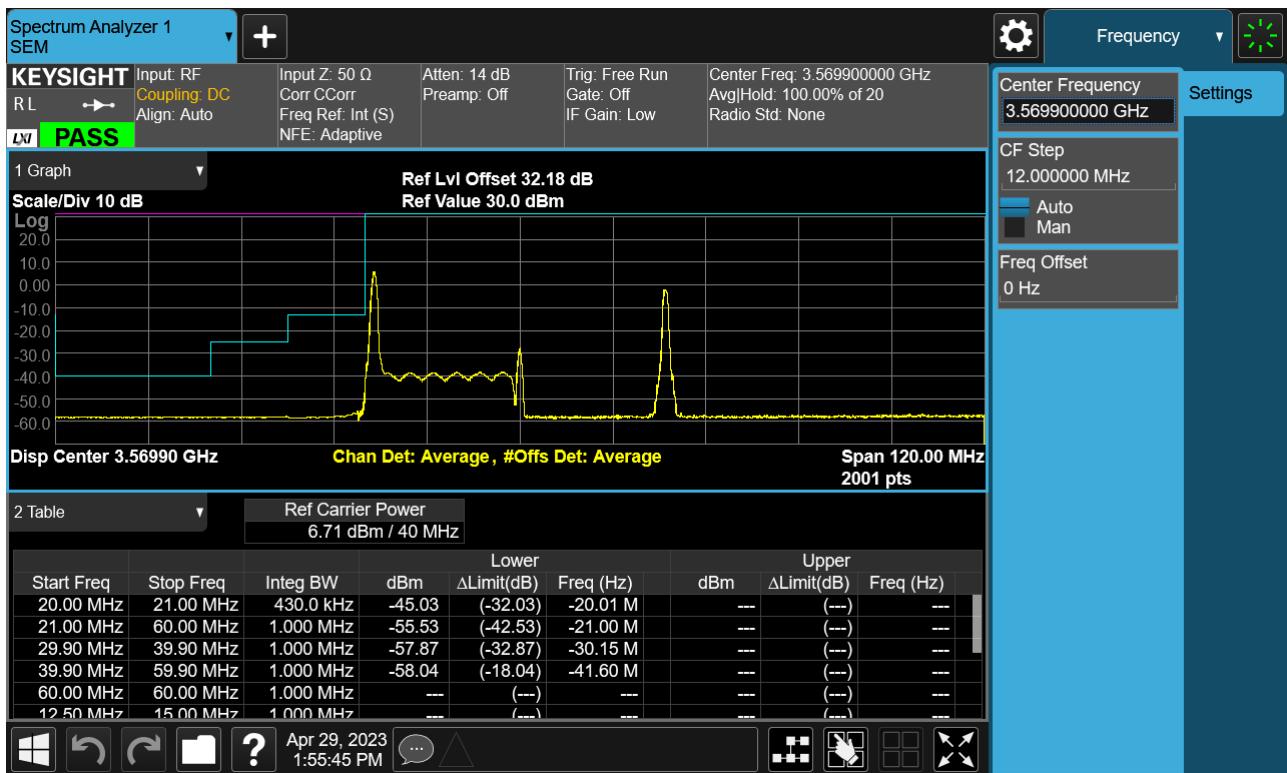


PCC 20 MHz Ch55340 RB1 Offset0, SCC 20 MHz Ch55538 RB1 Offset99-2

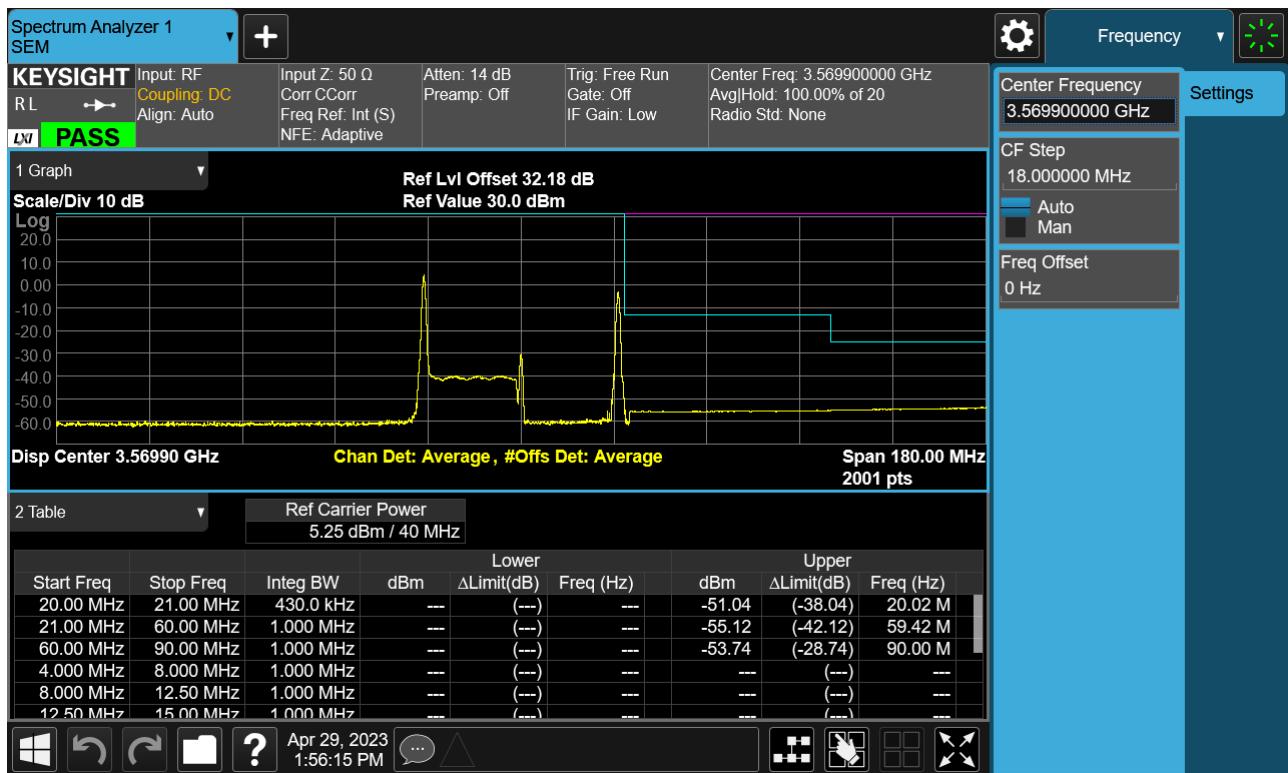


PCC 20 MHz Ch55340 RB1 Offset99, SCC 20 MHz Ch55538 RB1 Offset0-1

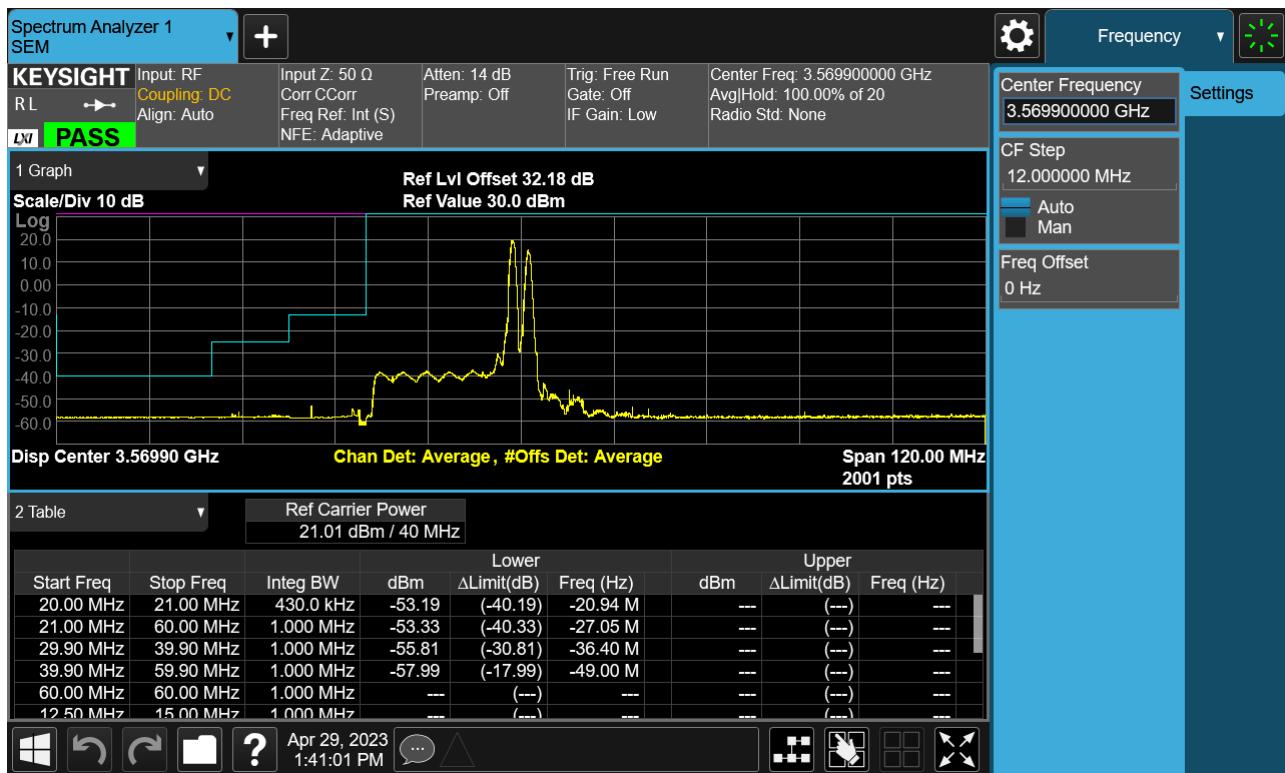


PCC 20 MHz Ch55340 RB1 Offset99, SCC 20 MHz Ch55538 RB1 Offset0-2

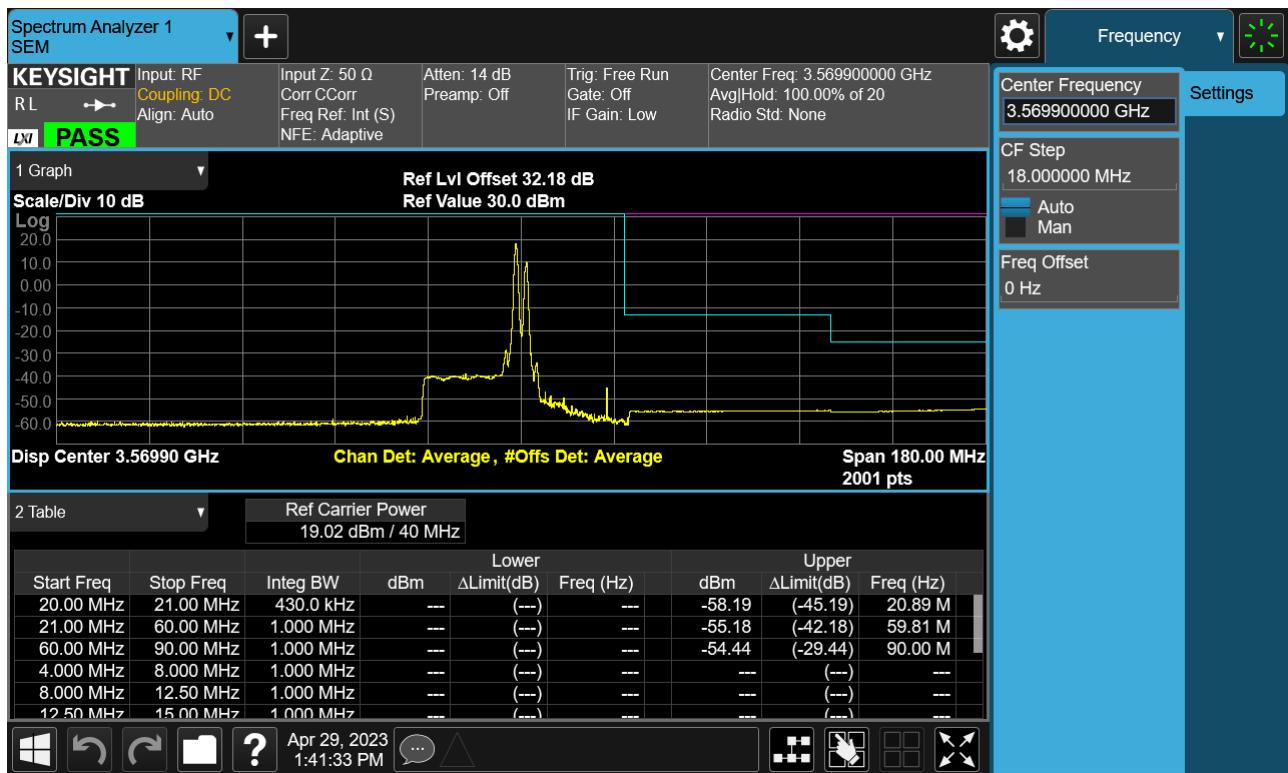


PCC 20 MHz Ch55340 RB100 Offset0, SCC 20 MHz Ch55538 RB100 Offset0-1

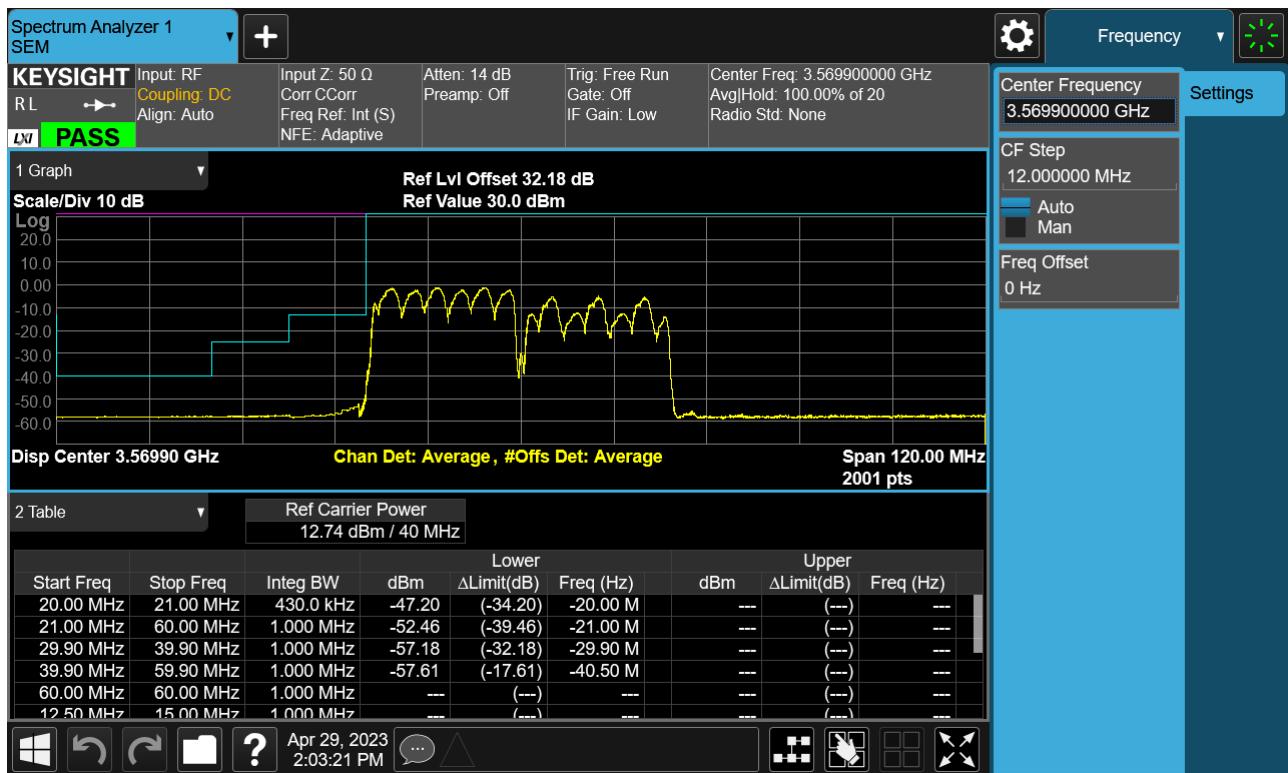


PCC 20 MHz Ch55340 RB100 Offset0, SCC 20 MHz Ch55538 RB100 Offset0-2

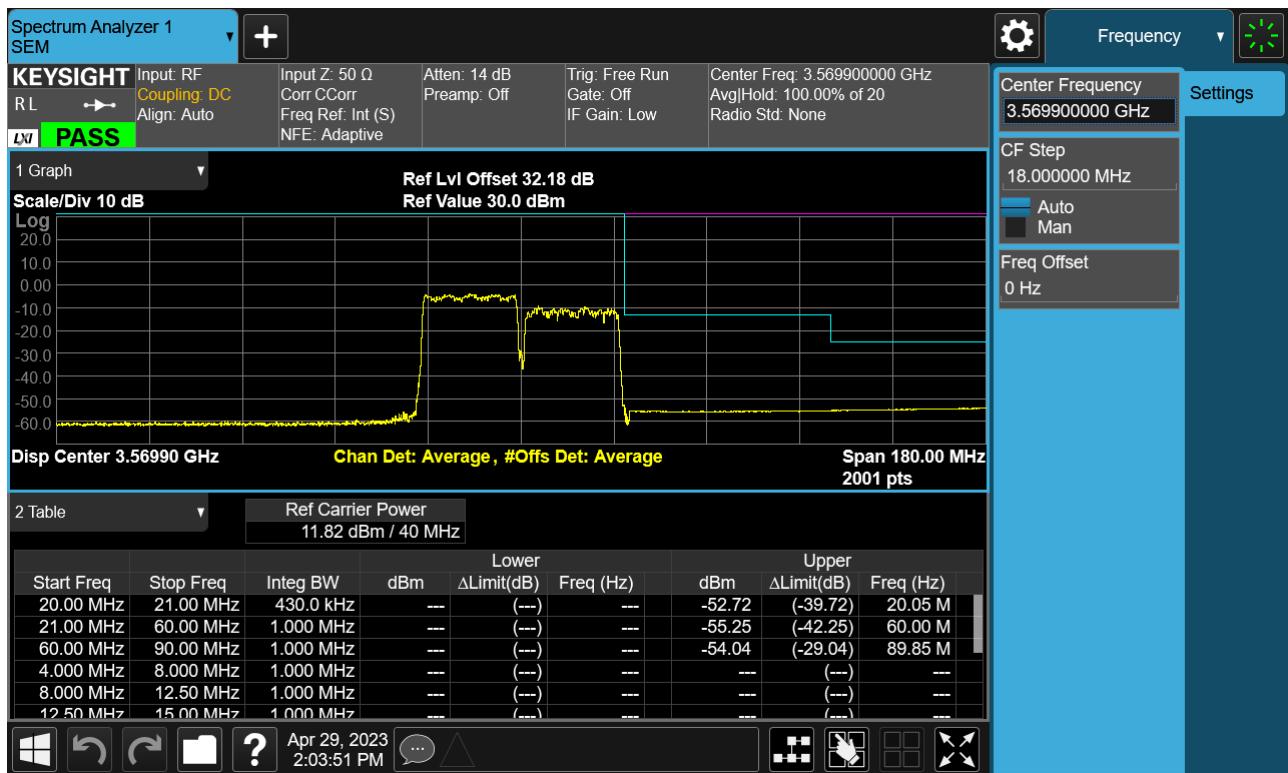


PCC 20 MHz Ch55891 RB100 Offset0, SCC 20 MHz Ch56089 RB100 Offset0-1

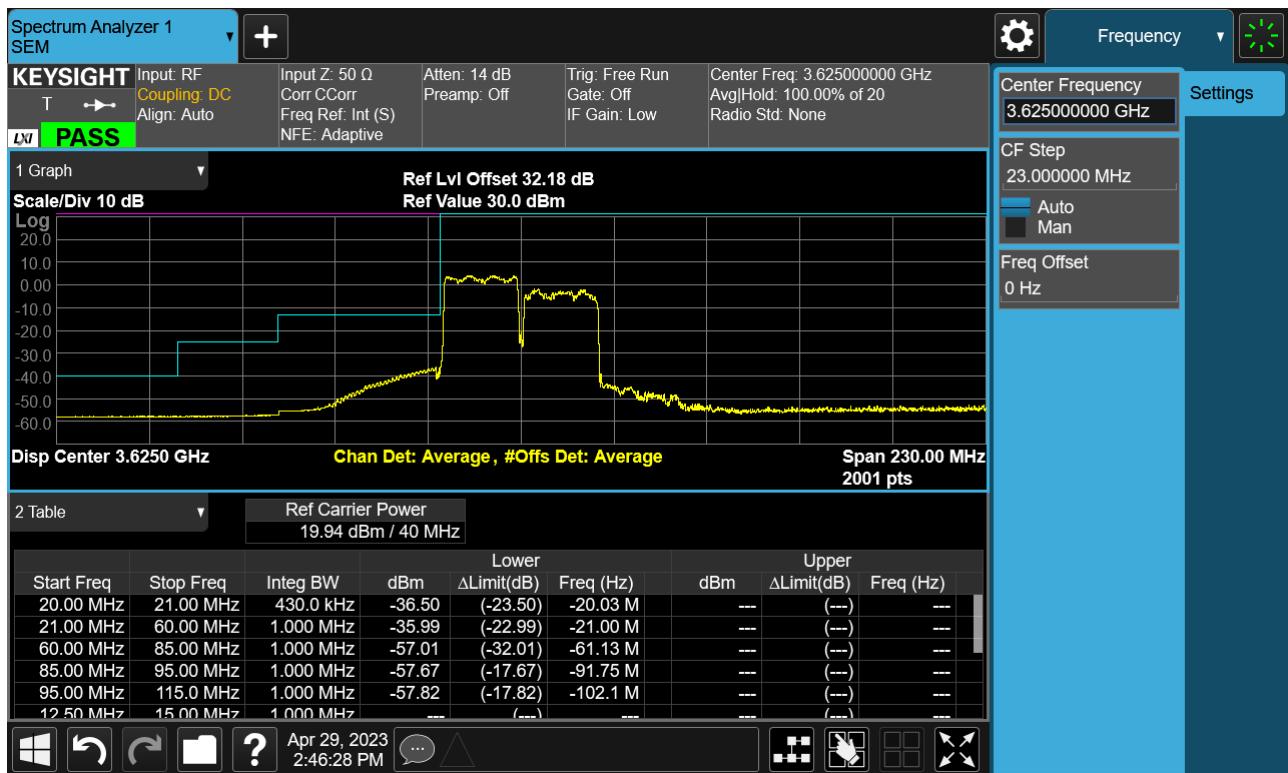


PCC 20 MHz Ch55891 RB100 Offset0, SCC 20 MHz Ch56089 RB100 Offset0-2

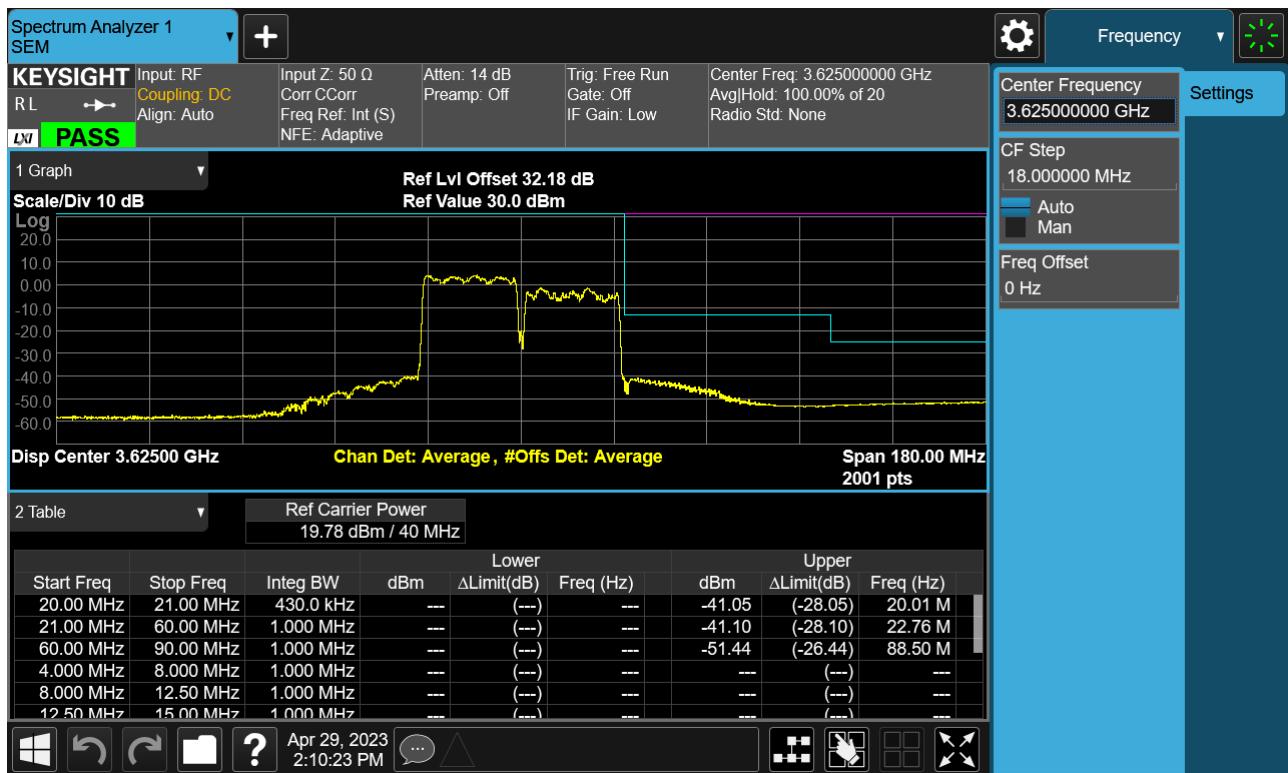


PCC 20 MHz Ch55916 RB1 Offset0, SCC 15 MHz Ch56087 RB1 Offset74

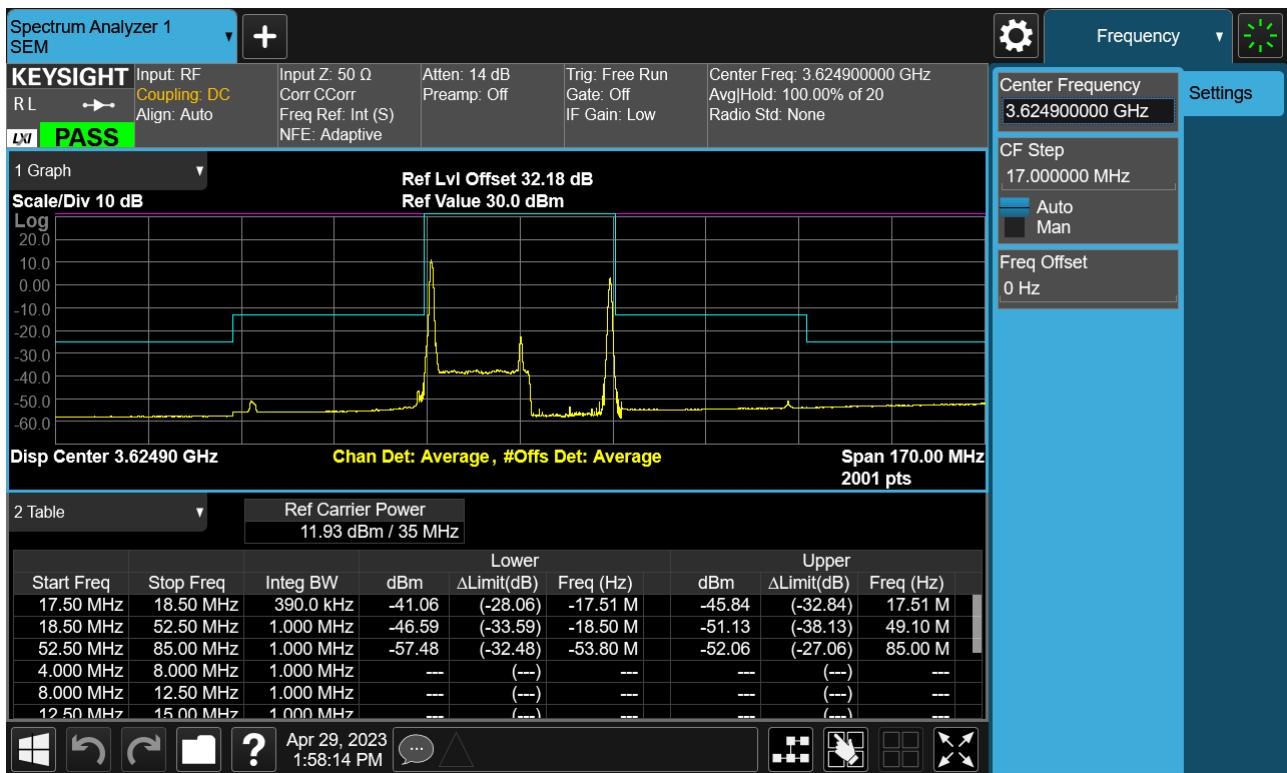


PCC 20 MHz Ch55916 RB1 Offset99, SCC 15 MHz Ch56087 RB1 Offset0

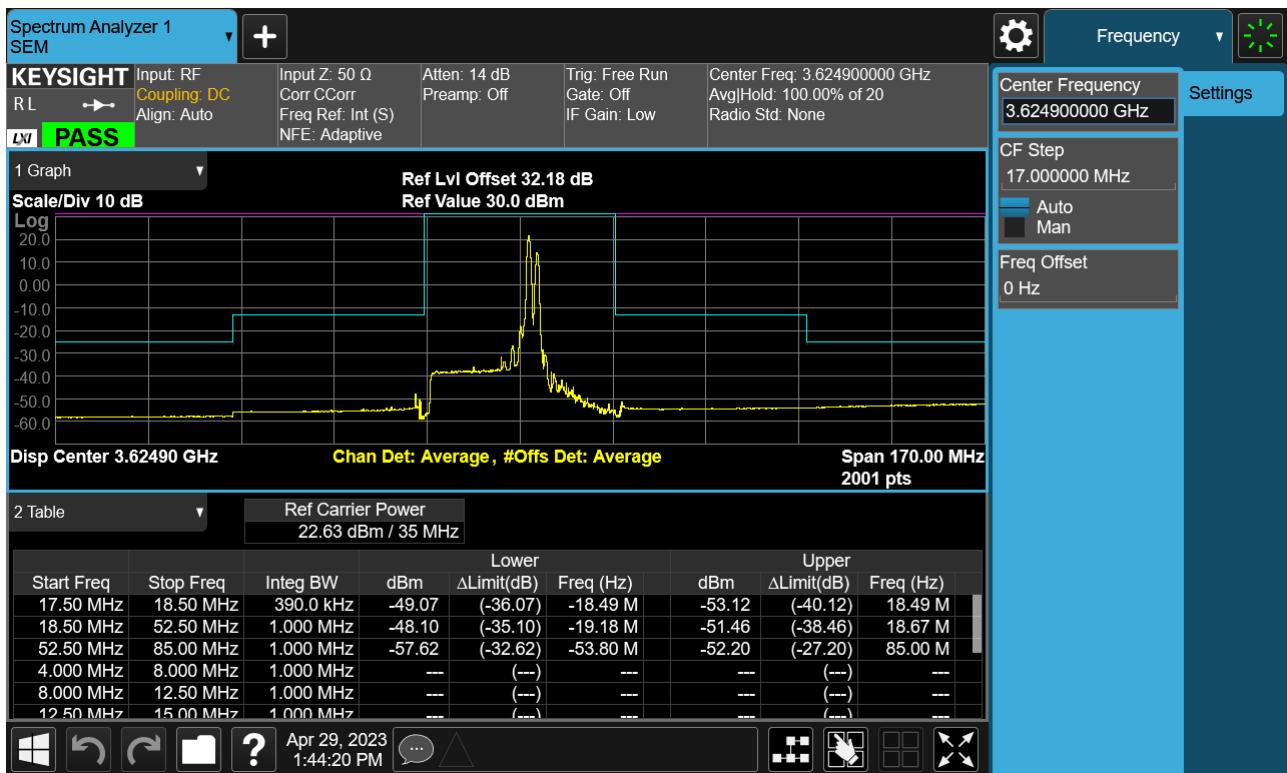


PCC 20 MHz Ch56442 RB1 Offset0, SCC 20 MHz Ch56640 RB1 Offset99-1

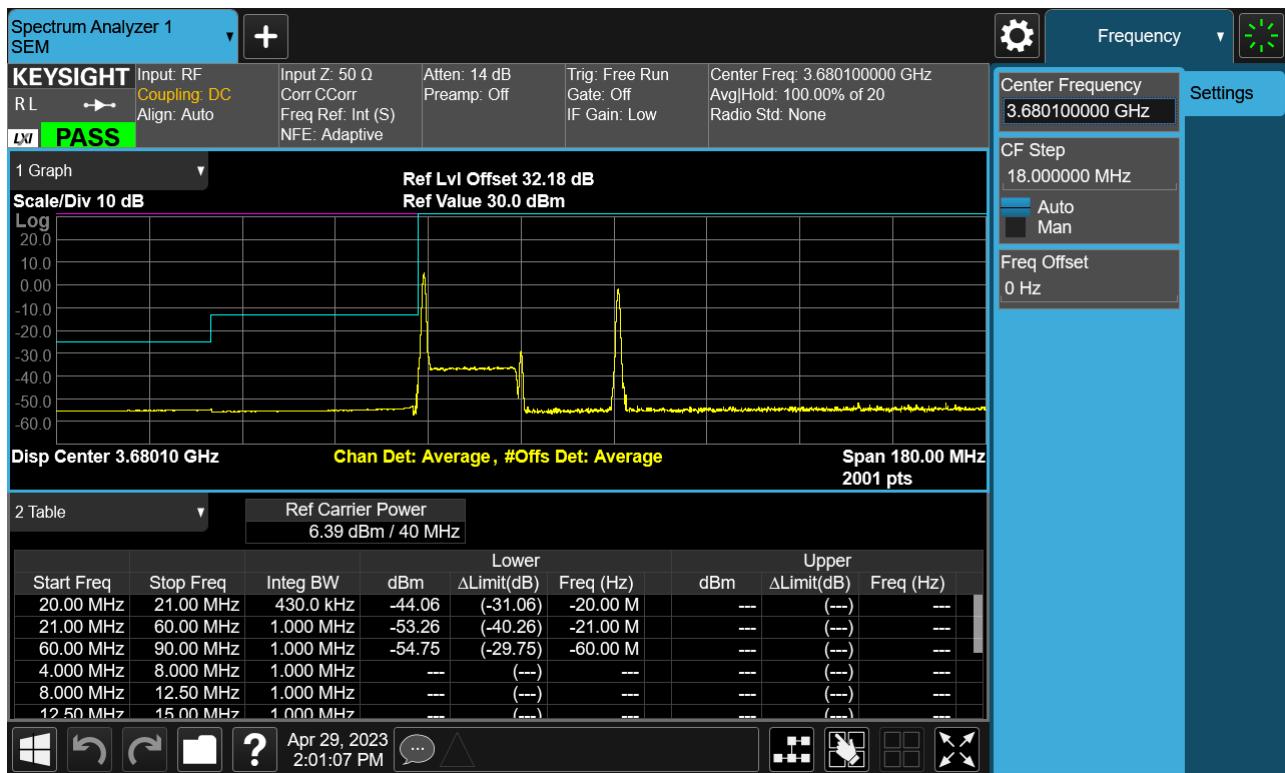


PCC 20 MHz Ch56442 RB1 Offset0, SCC 20 MHz Ch56640 RB1 Offset99-2

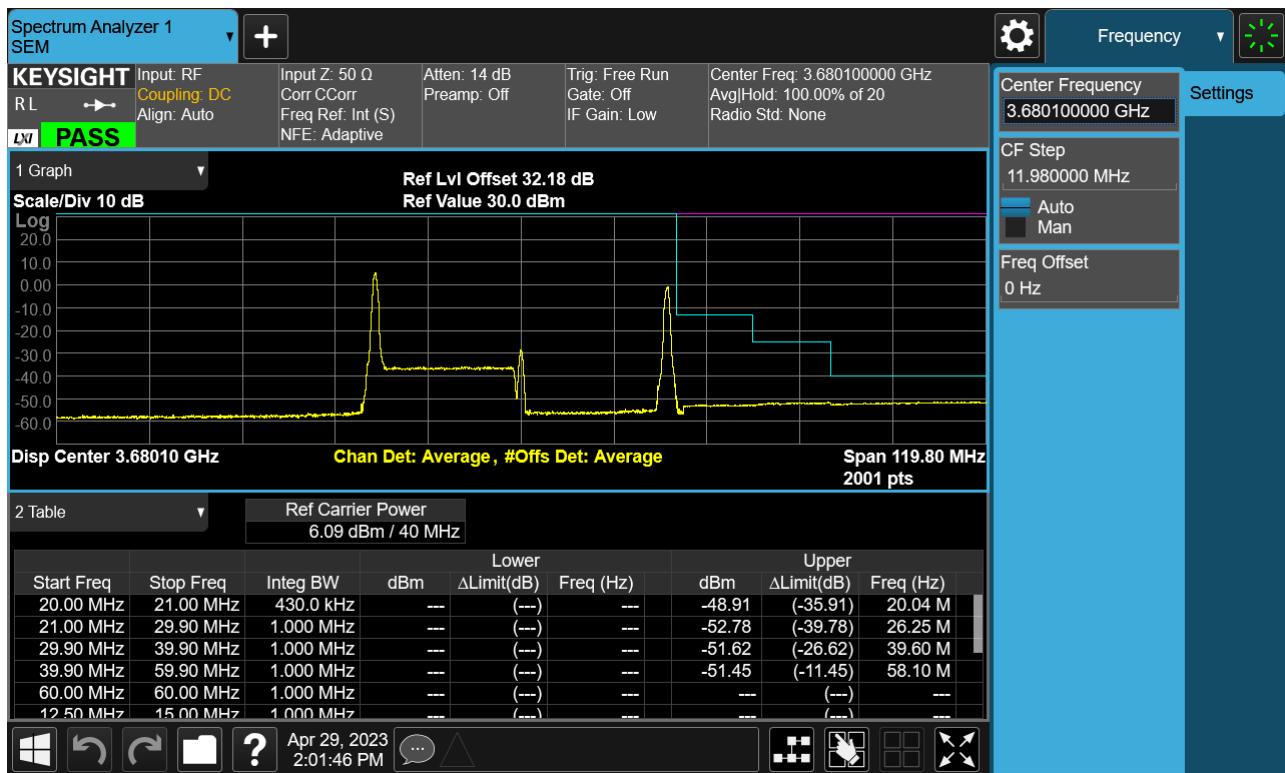


PCC 20 MHz Ch56442 RB1 Offset99, SCC 20 MHz Ch56640 RB1 Offset0-1

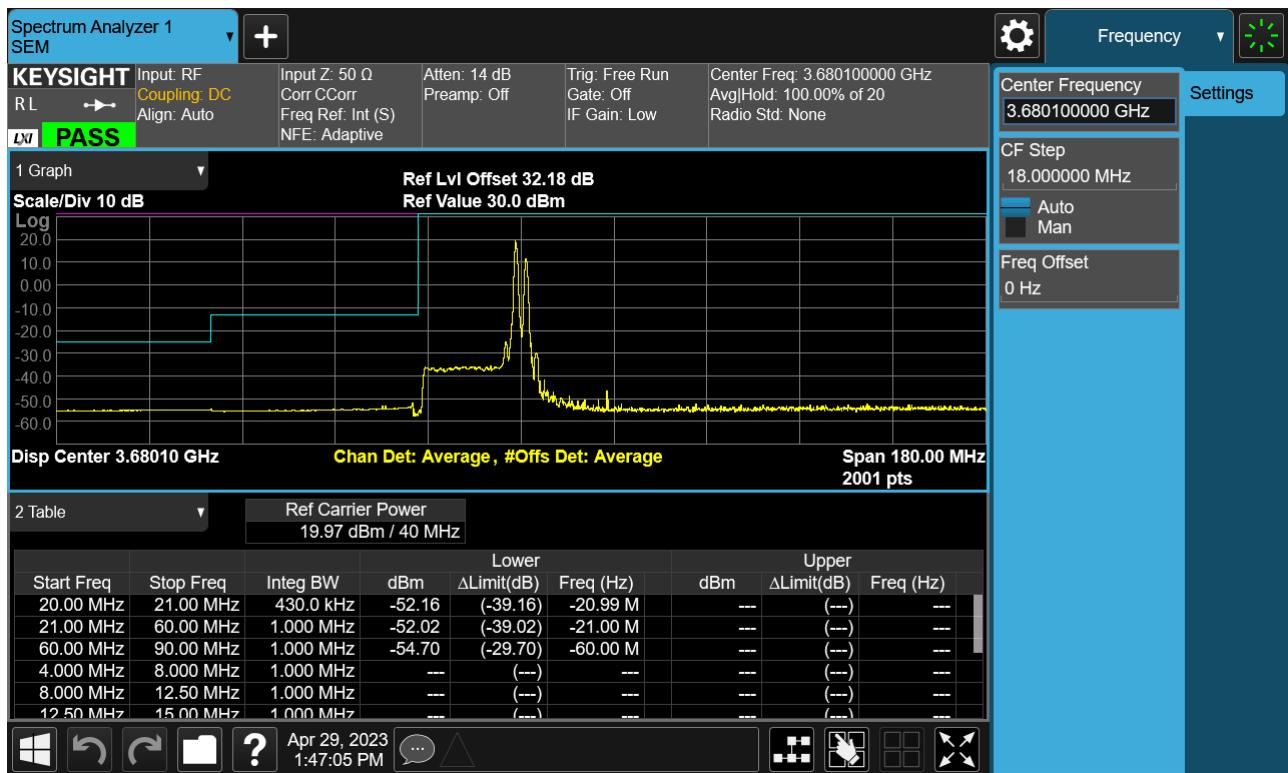


PCC 20 MHz Ch56442 RB1 Offset99, SCC 20 MHz Ch56640 RB1 Offset0-2

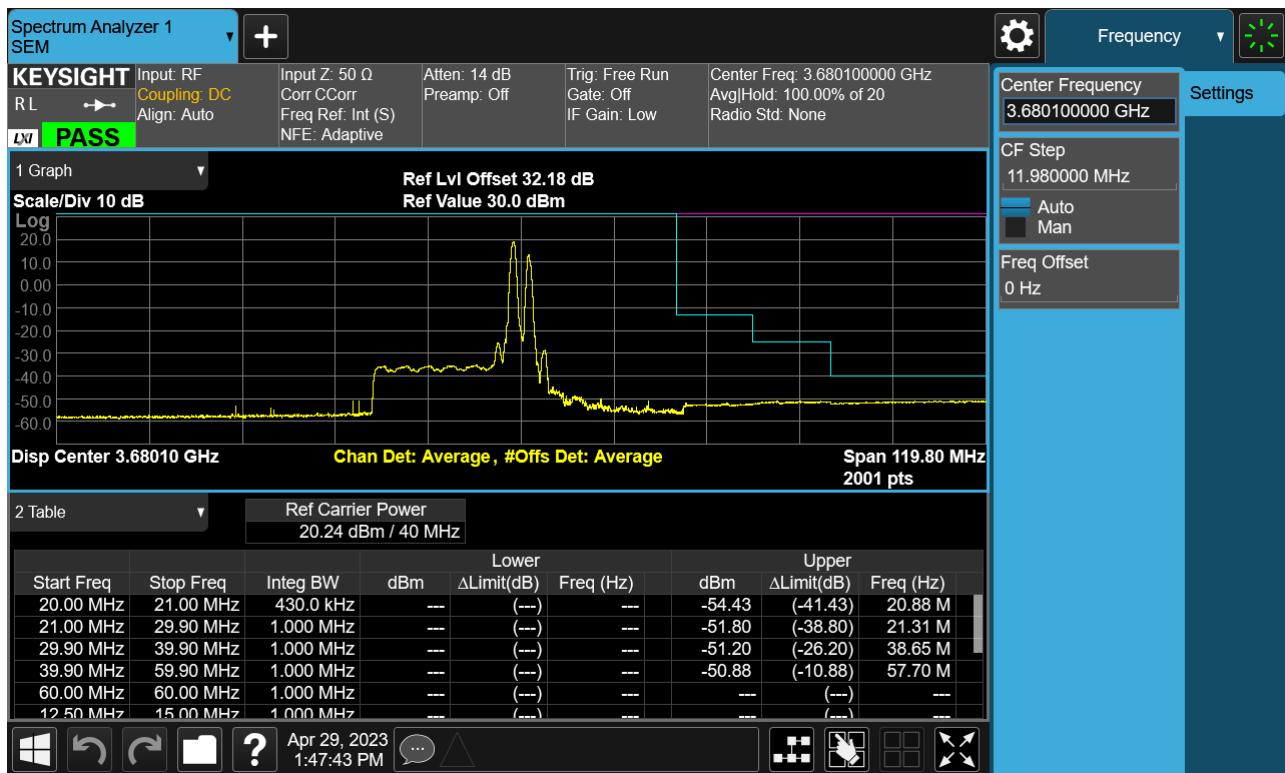

PCC 20 MHz Ch56442 RB100 Offset0, SCC 20 MHz Ch56640 RB100 Offset0-1

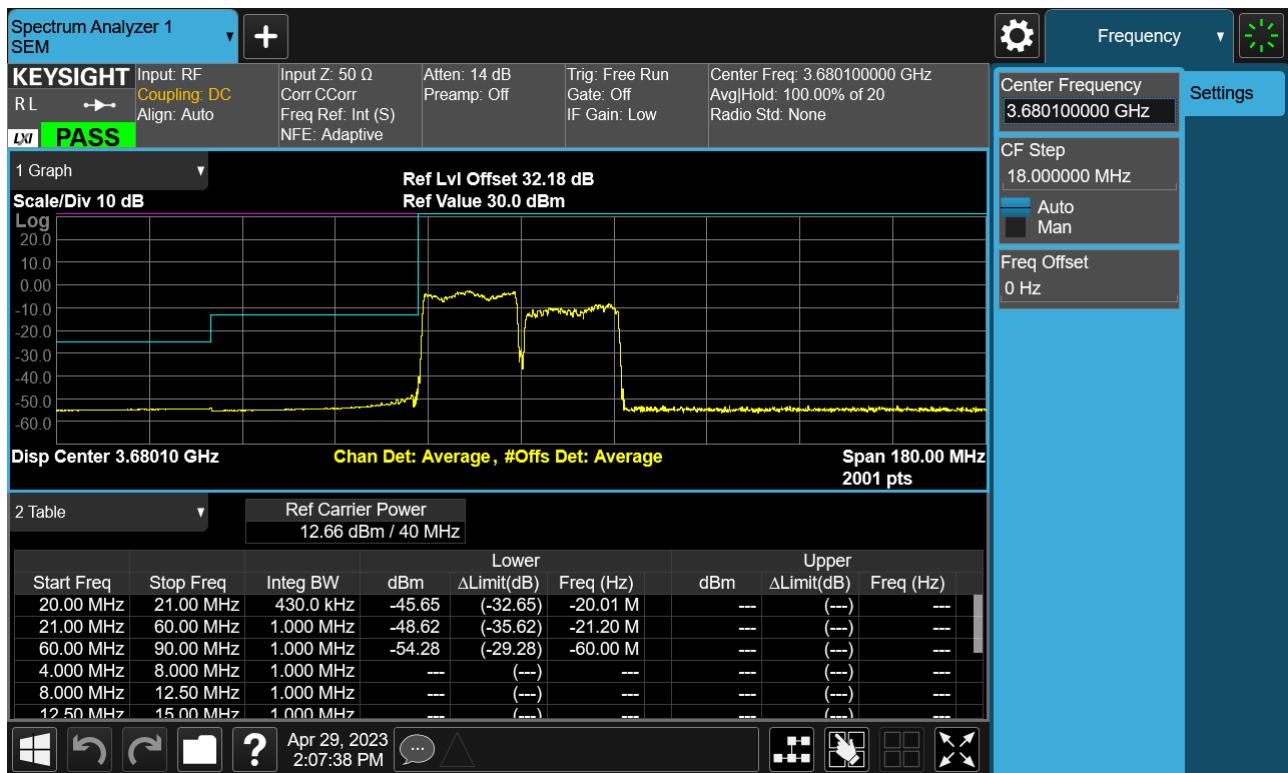

PCC 20 MHz Ch56442 RB100 Offset0, SCC 20 MHz Ch56640 RB100 Offset0-2

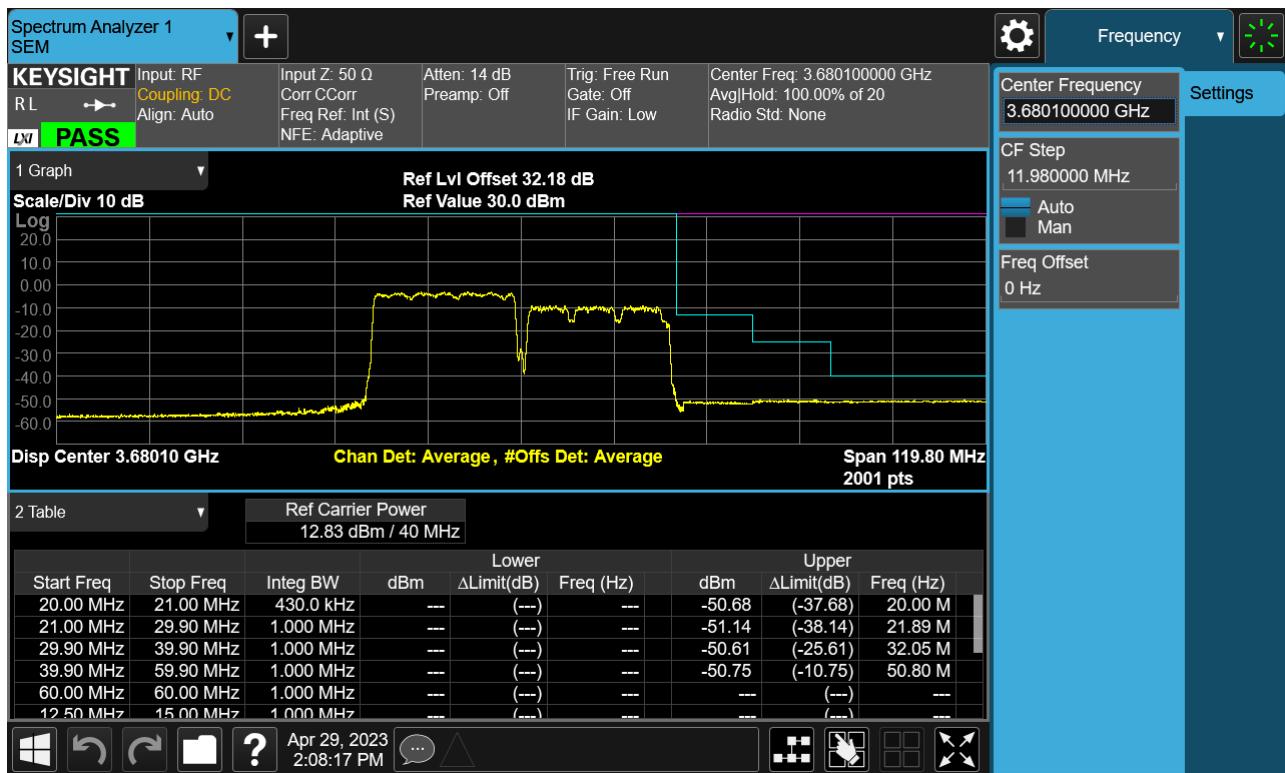

8.5 Frequency Stability / Variation Of Ambient Temperature

- PCC Channel: 55273
- PCC Frequency: 3553.3 MHz
- PCC BandWidth: 5 MHz
- SCC Channel: 55390
- SCC Frequency: 3565.0 MHz
- SCC BandWidth: 20 MHz
- Voltage : 3.880 VDC
- LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	PPM		Frequency Error (MHz)	
			PCC	SCC	PCC	SCC
100%	3.880	+20(Ref)	0.027	-0.028	3553.30008	3564.99983
100%		-30	0.026	-0.032	3553.30009	3564.99984
100%		-20	0.027	0.015	3553.30007	3565.00003
100%		-10	-0.039	0.025	3553.29980	3565.00008
100%		0	0.030	0.033	3553.30008	3565.00009
100%		10	0.025	0.017	3553.30006	3565.00005
100%		30	0.020	0.030	3553.30009	3565.00011
100%		40	-0.036	0.030	3553.29981	3565.00005
100%		50	-0.040	0.023	3553.29980	3565.00002
Batt. Endpoint	3.400	20	0.033	-0.038	3553.30005	3564.99983

<input checked="" type="checkbox"/> PCC Channel:	55295	
<input checked="" type="checkbox"/> PCC Frequency:	3555.5	MHz
<input checked="" type="checkbox"/> PCC BandWidth:	10	MHz
<input checked="" type="checkbox"/> SCC Channel:	55439	
<input checked="" type="checkbox"/> SCC Frequency:	3569.9	MHz
<input checked="" type="checkbox"/> SCC BandWidth:	20	MHz
<input checked="" type="checkbox"/> Voltage :	3.880	VDC
<input checked="" type="checkbox"/> LIMIT:	Emission must remain in band	

Voltage (%)	Power (VDC)	Temp. (°C)	PPM		Frequency Error (MHz)	
			PCC	SCC	PCC	SCC
100%	3.880	+20(Ref)	0.036	0.037	3555.50008	3569.90011
100%		-30	0.023	0.023	3555.50003	3569.90008
100%		-20	0.038	0.039	3555.50008	3569.90015
100%		-10	-0.050	-0.047	3555.49982	3569.89982
100%		0	0.032	0.027	3555.50004	3569.90008
100%		10	0.019	0.023	3555.50003	3569.90002
100%		30	-0.042	0.023	3555.49975	3569.90005
100%		40	0.032	0.020	3555.50011	3569.90006
100%		50	0.039	-0.048	3555.50011	3569.89980
Batt. Endpoint	3.400	20	0.030	0.036	3555.50011	3569.90006

PCC Channel: 55318
 PCC Frequency: 3557.8 MHz
 PCC BandWidth: 15 MHz
 SCC Channel: 55489
 SCC Frequency: 3574.9 MHz
 SCC BandWidth: 20 MHz
 Voltage : 3.880 VDC
 LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	PPM		Frequency Error (MHz)	
			PCC	SCC	PCC	SCC
100%	3.880	+20(Ref)	0.023	0.031	3557.80008	3574.90004
100%		-30	0.028	0.037	3557.80012	3574.90005
100%		-20	0.036	-0.032	3557.80006	3574.89985
100%		-10	-0.043	-0.032	3557.79984	3574.89982
100%		0	0.031	-0.047	3557.80004	3574.89985
100%		10	0.022	-0.034	3557.80003	3574.89986
100%		30	0.036	0.029	3557.80010	3574.90006
100%		40	0.017	0.031	3557.80004	3574.90005
100%		50	-0.037	0.021	3557.79986	3574.90004
Batt. Endpoint	3.400	20	0.015	0.032	3557.79998	3574.90004

<input checked="" type="checkbox"/> PCC Channel:	55340	
<input checked="" type="checkbox"/> PCC Frequency:	3560.0	MHz
<input checked="" type="checkbox"/> PCC BandWidth:	20	MHz
<input checked="" type="checkbox"/> SCC Channel:	55538	
<input checked="" type="checkbox"/> SCC Frequency:	3579.8	MHz
<input checked="" type="checkbox"/> SCC BandWidth:	20	MHz
<input checked="" type="checkbox"/> Voltage :	3.880	VDC
<input checked="" type="checkbox"/> LIMIT:	Emission must remain in band	

Voltage (%)	Power (VDC)	Temp. (°C)	PPM		Frequency Error (MHz)	
			PCC	SCC	PCC	SCC
100%	3.880	+20(Ref)	-0.045	0.023	3559.99982	3579.80002
100%		-30	-0.042	0.024	3559.99980	3579.80006
100%		-20	0.023	0.016	3560.00001	3579.80003
100%		-10	-0.042	0.026	3559.99985	3579.80009
100%		0	0.038	-0.035	3560.00010	3579.79981
100%		10	0.027	0.016	3560.00009	3579.80002
100%		30	0.032	-0.043	3560.00014	3579.79978
100%		40	0.030	-0.040	3560.00009	3579.79979
100%		50	0.033	0.027	3560.00008	3579.80010
Batt. Endpoint	3.400	20	0.033	0.031	3560.00012	3579.80009

PCC Channel: 56523
 PCC Frequency: 3678.3 MHz
 PCC BandWidth: 5 MHz
 SCC Channel: 56640
 SCC Frequency: 3690.0 MHz
 SCC BandWidth: 20 MHz
 Voltage : 3.880 VDC
 LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	PPM		Frequency Error (MHz)	
			PCC	SCC	PCC	SCC
100%	3.880	+20(Ref)	-0.036	0.038	3678.29978	3690.00011
100%		-30	0.029	0.029	3678.30009	3690.00010
100%		-20	-0.035	0.020	3678.29982	3690.00009
100%		-10	0.038	-0.047	3678.30004	3689.99980
100%		0	0.035	-0.032	3678.30011	3689.99984
100%		10	0.034	0.020	3678.30004	3690.00003
100%		30	0.021	-0.034	3678.30005	3689.99987
100%		40	0.033	-0.044	3678.30008	3689.99979
100%		50	0.029	0.024	3678.30011	3690.00008
Batt. Endpoint		20	0.040	0.018	3678.30014	3690.00007

<input type="checkbox"/> PCC Channel:	56496	
<input type="checkbox"/> PCC Frequency:	3675.6	MHz
<input type="checkbox"/> PCC BandWidth:	10	MHz
<input type="checkbox"/> SCC Channel:	56640	
<input type="checkbox"/> SCC Frequency:	3690.0	MHz
<input type="checkbox"/> SCC BandWidth:	20	MHz
<input type="checkbox"/> Voltage :	3.880	VDC
<input type="checkbox"/> LIMIT:	Emission must remain in band	

Voltage (%)	Power (VDC)	Temp. (°C)	PPM		Frequency Error (MHz)	
			PCC	SCC	PCC	SCC
100%	3.880	+20(Ref)	0.041	0.023	3675.60008	3690.00004
100%		-30	0.034	0.013	3675.60013	3690.00008
100%		-20	0.026	-0.033	3675.60011	3689.99982
100%		-10	0.035	0.034	3675.60012	3690.00010
100%		0	0.018	-0.035	3675.60006	3689.99985
100%		10	0.033	0.030	3675.60009	3690.00006
100%		30	-0.036	0.030	3675.59983	3690.00012
100%		40	0.037	0.034	3675.60006	3690.00006
100%		50	-0.031	0.024	3675.59983	3690.00004
Batt. Endpoint		20	0.035	0.025	3675.60010	3690.00005

PCC Channel: 56469
 PCC Frequency: 3672.9 MHz
 PCC BandWidth: 15 MHz
 SCC Channel: 56640
 SCC Frequency: 3690.0 MHz
 SCC BandWidth: 20 MHz
 Voltage : 3.880 VDC
 LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	PPM		Frequency Error (MHz)	
			PCC	SCC	PCC	SCC
100%	3.880	+20(Ref)	0.029	-0.041	3672.90007	3689.99984
100%		-30	-0.042	0.034	3672.89982	3690.00008
100%		-20	-0.039	-0.030	3672.89986	3689.99985
100%		-10	0.030	-0.025	3672.90010	3689.99989
100%		0	0.025	0.025	3672.90006	3690.00002
100%		10	0.027	-0.036	3672.90009	3689.99985
100%		30	0.034	0.032	3672.90005	3690.00009
100%		40	0.034	0.029	3672.90007	3690.00007
100%		50	0.017	0.020	3672.89999	3690.00008
Batt. Endpoint		20	0.042	0.036	3672.90013	3690.00009

PCC Channel: 56442
 PCC Frequency: 3670.2 MHz
 PCC BandWidth: 20 MHz
 SCC Channel: 56640
 SCC Frequency: 3690.0 MHz
 SCC BandWidth: 20 MHz
 Voltage : 3.880 MHz
 LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	PPM		Frequency Error (MHz)	
			PCC	SCC	PCC	SCC
100%	3.880	+20(Ref)	0.038	-0.040	3670.20013	3689.99980
100%		-30	0.016	0.027	3670.20001	3690.00000
100%		-20	0.026	0.031	3670.20009	3690.00011
100%		-10	0.033	0.033	3670.20011	3690.00010
100%		0	0.033	-0.040	3670.20011	3689.99983
100%		10	0.032	0.032	3670.20011	3690.00011
100%		30	-0.036	0.033	3670.19982	3690.00013
100%		40	-0.035	0.017	3670.19980	3690.00003
100%		50	-0.033	0.028	3670.19984	3690.00005
Batt. Endpoint		20	-0.029	0.018	3670.19983	3690.00007

8.6 Radiated Spurious Emissions

PCC Channel : 55340 (3560.0 MHz)
 PCC BW(MHz) : 20
 PCC RB/ RB Offset : 1/ 99
 SCC Channel : 55538 (3579.8 MHz)
 SCC BW(MHz) : 20
 SCC RB/ RB Offset : 1/ 0
 DISTANCE: 1 meters
 LIMIT: -40.0 dBm

Freq.(MHz)	Measured Level [dBm]	Ant. Gain (dBi)	Substitute Level [dBm]	C.L	Pol.	Result (dBm)	Detector
7 139.80	-50.02	10.82	-50.12	4.50	V	-43.80	Peak
10 709.70	-54.87	11.28	-49.88	5.81	V	-44.41	Peak
14 279.60	-60.79	11.84	-48.36	6.71	H	-43.23	Peak

PCC Channel : 55891 (3615.1 MHz)
 PCC BW(MHz) : 20
 PCC RB/ RB Offset : 1/ 99
 SCC Channel : 56089 (3634.9 MHz)
 SCC BW(MHz) : 20
 SCC RB/ RB Offset : 1/ 0
 DISTANCE: 1 meters
 LIMIT: -40.0 dBm

Freq.(MHz)	Measured Level [dBm]	Ant. Gain (dBi)	Substitute Level [dBm]	C.L	Pol.	Result (dBm)	Detector
7 250.00	-49.96	10.90	-49.93	4.50	V	-43.53	Peak
10 875.00	-58.95	10.96	-51.57	6.19	H	-46.80	Peak
14 500.00	-60.37	11.41	-47.97	6.78	V	-43.34	Peak

PCC Channel : 56442 (3670.2 MHz)
 PCC BW(MHz) : 20
 PCC RB/ RB Offset : 1/ 99
 SCC Channel : 56640 (3690.0 MHz)
 SCC BW(MHz) : 20
 SCC RB/ RB Offset : 1/ 0
 DISTANCE: 1 meters
 LIMIT: -40.0 dBm

Freq.(MHz)	Measured Level [dBm]	Ant. Gain (dBi)	Substitute Level [dBm]	C.L	Pol.	Result (dBm)	Detector
7 360.20	-52.78	10.88	-53.90	4.55	H	-47.57	Average
11 040.30	-57.57	10.98	-52.02	5.75	H	-46.79	Peak
14 720.40	-59.77	11.20	-48.32	6.85	H	-43.97	Peak

8.7 Occupied Bandwidth

PCC					SCC					Data (MHz)
BW [MHz]	Ch	Freq [MHz]	Mod	RB/ Offset	BW [MHz]	Ch	Freq [MHz]	Mod	RB/ Offset	
5	55898	3615.8	QPSK	25/ 0	20	56015	3627.5	QPSK	100/ 0	22.450
10	55896	3615.6	QPSK	50/ 0	20	56040	3630.0	QPSK	100/ 0	26.706
15	55893	3615.3	QPSK	75/ 0	20	56064	3632.4	QPSK	100/ 0	32.540
20	55965	3622.5	QPSK	100/ 0	5	56082	3634.2	QPSK	25/ 0	22.929
20	55941	3620.1	QPSK	100/ 0	10	56085	3634.5	QPSK	50/ 0	27.761
20	55916	3617.6	QPSK	100/ 0	15	56087	3634.7	QPSK	75/ 0	32.736
20	55891	3615.1	QPSK	100/ 0	20	56089	3634.9	QPSK	100/ 0	37.408


PCC					SCC					Data (MHz)
BW [MHz]	Ch	Freq [MHz]	Mod	RB/ Offset	BW [MHz]	Ch	Freq [MHz]	Mod	RB/ Offset	
5	55898	3615.8	16QAM	25/ 0	20	56015	3627.5	16QAM	100/ 0	22.524
10	55896	3615.6	16QAM	50/ 0	20	56040	3630.0	16QAM	100/ 0	27.627
15	55893	3615.3	16QAM	75/ 0	20	56064	3632.4	16QAM	100/ 0	32.547
20	55965	3622.5	16QAM	100/ 0	5	56082	3634.2	16QAM	25/ 0	22.652
20	55941	3620.1	16QAM	100/ 0	10	56085	3634.5	16QAM	50/ 0	27.733
20	55916	3617.6	16QAM	100/ 0	15	56087	3634.7	16QAM	75/ 0	32.531
20	55891	3615.1	16QAM	100/ 0	20	56089	3634.9	16QAM	100/ 0	37.261

PCC					SCC					Data (MHz)
BW [MHz]	Ch	Freq [MHz]	Mod	RB/ Offset	BW [MHz]	Ch	Freq [MHz]	Mod	RB/ Offset	
5	55898	3615.8	64QAM	25/ 0	20	56015	3627.5	64QAM	100/ 0	22.685
10	55896	3615.6	64QAM	50/ 0	20	56040	3630.0	64QAM	100/ 0	27.685
15	55893	3615.3	64QAM	75/ 0	20	56064	3632.4	64QAM	100/ 0	32.389
20	55965	3622.5	64QAM	100/ 0	5	56082	3634.2	64QAM	25/ 0	22.988
20	55941	3620.1	64QAM	100/ 0	10	56085	3634.5	64QAM	50/ 0	27.634
20	55916	3617.6	64QAM	100/ 0	15	56087	3634.7	64QAM	75/ 0	32.506
20	55891	3615.1	64QAM	100/ 0	20	56089	3634.9	64QAM	100/ 0	37.562


PCC					SCC					Data (MHz)
BW [MHz]	Ch	Freq [MHz]	Mod	RB/ Offset	BW [MHz]	Ch	Freq [MHz]	Mod	RB/ Offset	
5	55898	3615.8	256QAM	25/ 0	20	56015	3627.5	256QAM	100/ 0	22.779
10	55896	3615.6	256QAM	50/ 0	20	56040	3630.0	256QAM	100/ 0	27.491
15	55893	3615.3	256QAM	75/ 0	20	56064	3632.4	256QAM	100/ 0	32.436
20	55965	3622.5	256QAM	100/ 0	5	56082	3634.2	256QAM	25/ 0	22.821
20	55941	3620.1	256QAM	100/ 0	10	56085	3634.5	256QAM	50/ 0	27.625
20	55916	3617.6	256QAM	100/ 0	15	56087	3634.7	256QAM	75/ 0	32.682
20	55891	3615.1	256QAM	100/ 0	20	56089	3634.9	256QAM	100/ 0	37.735

Note:


In order to simplify the report, attached plots were only Max.Bandwidth(20+20)

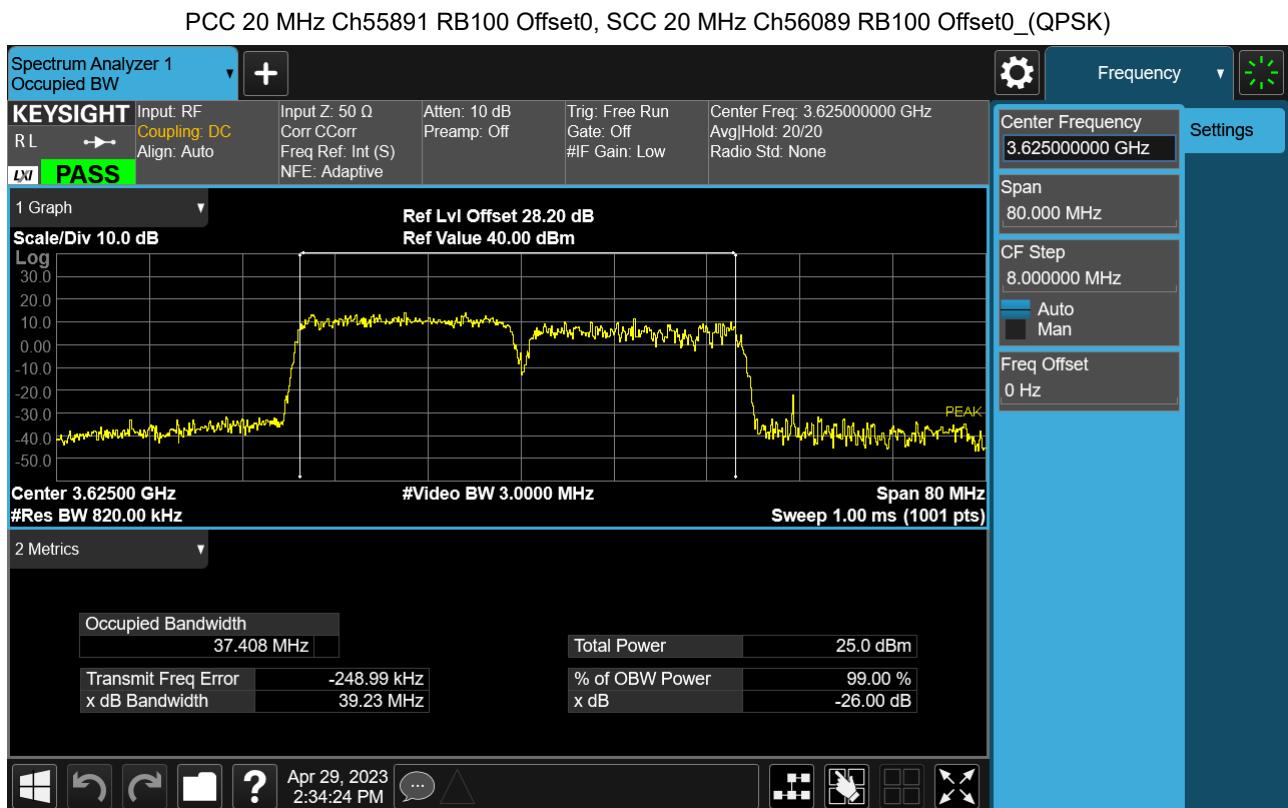



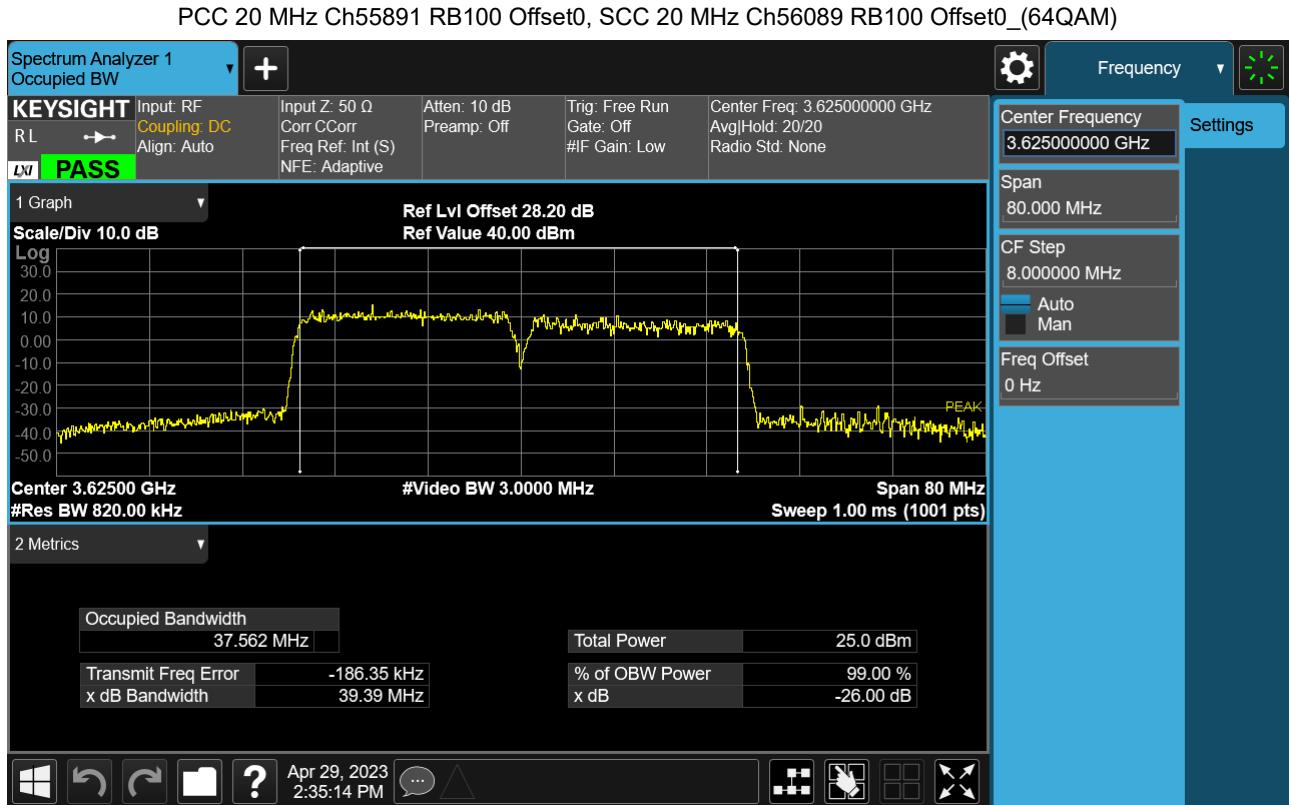

PCC 20 MHz Ch55891 RB100 Offset0, SCC 20 MHz Ch56089 RB100 Offset0_(256QAM)

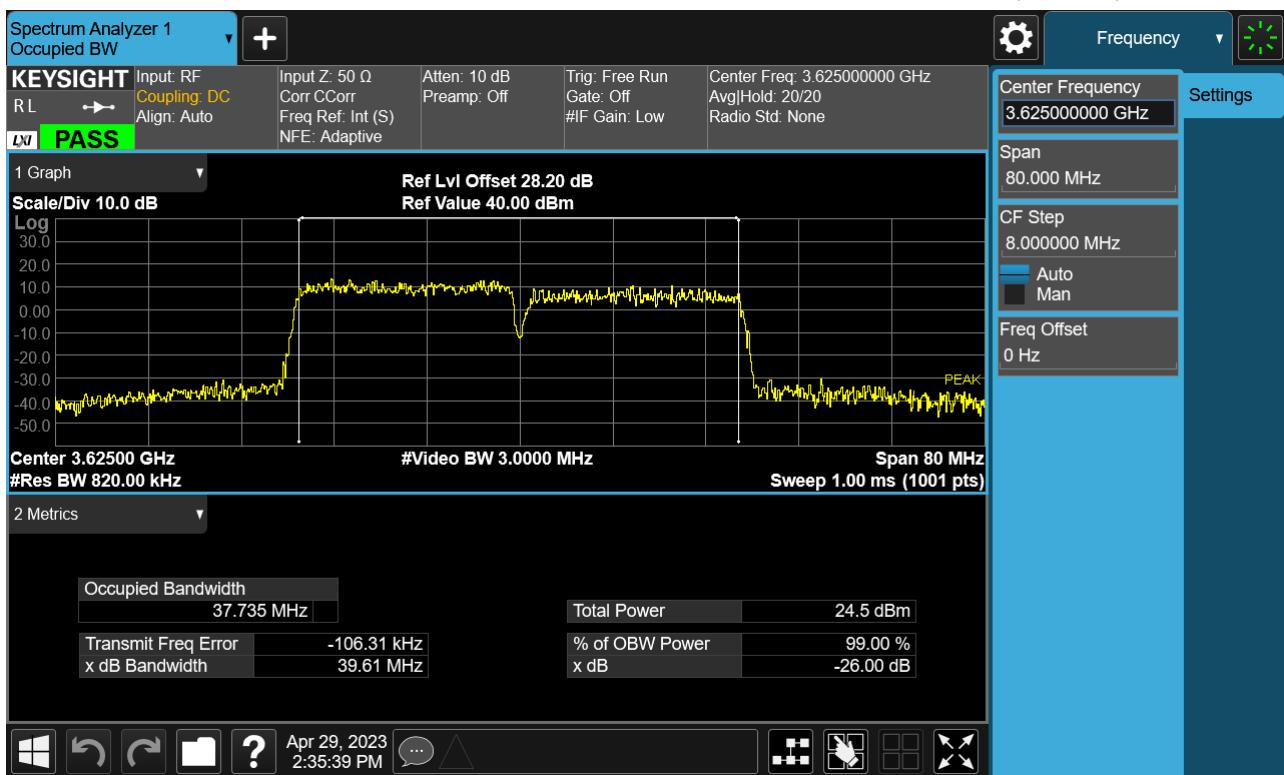

8.8 Peak- to- Average Ratio

PCC					SCC					Data (dBm)
BW [MHz]	Ch	Freq [MHz]	Mod	RB/ Offset	BW [MHz]	Ch	Freq [MHz]	Mod	RB/ Offset	
5	55898	3615.8	QPSK	25/ 0	20	56015	3627.5	QPSK	100/ 0	6.07
10	55896	3615.6	QPSK	50/ 0	20	56040	3630.0	QPSK	100/ 0	6.29
15	55893	3615.3	QPSK	75/ 0	20	56064	3632.4	QPSK	100/ 0	6.15
20	55965	3622.5	QPSK	100/ 0	5	56082	3634.2	QPSK	25/ 0	6.20
20	55941	3620.1	QPSK	100/ 0	10	56085	3634.5	QPSK	50/ 0	6.11
20	55916	3617.6	QPSK	100 0	15	56087	3634.7	QPSK	75/ 0	6.18
20	55891	3615.1	QPSK	100/ 0	20	56089	3634.9	QPSK	100/ 0	6.42


PCC					SCC					Data (dBm)
BW [MHz]	Ch	Freq [MHz]	Mod	RB/ Offset	BW [MHz]	Ch	Freq [MHz]	Mod	RB/ Offset	
5	55898	3615.8	16QAM	25/ 0	20	56015	3627.5	16QAM	100/ 0	6.78
10	55896	3615.6	16QAM	50/ 0	20	56040	3630.0	16QAM	100/ 0	6.79
15	55893	3615.3	16QAM	75/ 0	20	56064	3632.4	16QAM	100/ 0	6.79
20	55965	3622.5	16QAM	100/ 0	5	56082	3634.2	16QAM	25/ 0	6.73
20	55941	3620.1	16QAM	100/ 0	10	56085	3634.5	16QAM	50/ 0	6.71
20	55916	3617.6	16QAM	100/ 0	15	56087	3634.7	16QAM	75/ 0	6.78
20	55891	3615.1	16QAM	100/ 0	20	56089	3634.9	16QAM	100/ 0	6.90

PCC					SCC					Data (dBm)
BW [MHz]	Ch	Freq [MHz]	Mod	RB/ Offset	BW [MHz]	Ch	Freq [MHz]	Mod	RB/ Offset	
5	55898	3615.8	64QAM	25/ 0	20	56015	3627.5	64QAM	100/ 0	6.96
10	55896	3615.6	64QAM	50/ 0	20	56040	3630.0	64QAM	100/ 0	6.83
15	55893	3615.3	64QAM	75/ 0	20	56064	3632.4	64QAM	100/ 0	6.75
20	55965	3622.5	64QAM	100/ 0	5	56082	3634.2	64QAM	25/ 0	6.75
20	55941	3620.1	64QAM	100/ 0	10	56085	3634.5	64QAM	50/ 0	6.77
20	55916	3617.6	64QAM	100/ 0	15	56087	3634.7	64QAM	75/ 0	6.79
20	55891	3615.1	64QAM	100/ 0	20	56089	3634.9	64QAM	100/ 0	6.86


PCC					SCC					Data (dBm)
BW [MHz]	Ch	Freq [MHz]	Mod	RB/ Offset	BW [MHz]	Ch	Freq [MHz]	Mod	RB/ Offset	
5	55898	3615.8	256QAM	25/ 0	20	56015	3627.5	256QAM	100/ 0	6.95
10	55896	3615.6	256QAM	50/ 0	20	56040	3630.0	256QAM	100/ 0	6.92
15	55893	3615.3	256QAM	75/ 0	20	56064	3632.4	256QAM	100/ 0	6.90
20	55965	3622.5	256QAM	100/ 0	5	56082	3634.2	256QAM	25/ 0	6.87
20	55941	3620.1	256QAM	100/ 0	10	56085	3634.5	256QAM	50/ 0	6.89
20	55916	3617.6	256QAM	100/ 0	15	56087	3634.7	256QAM	75/ 0	6.96
20	55891	3615.1	256QAM	100/ 0	20	56089	3634.9	256QAM	100/ 0	6.97

Note:


In order to simplify the report, attached plots were only Max.Bandwidth(20+20)

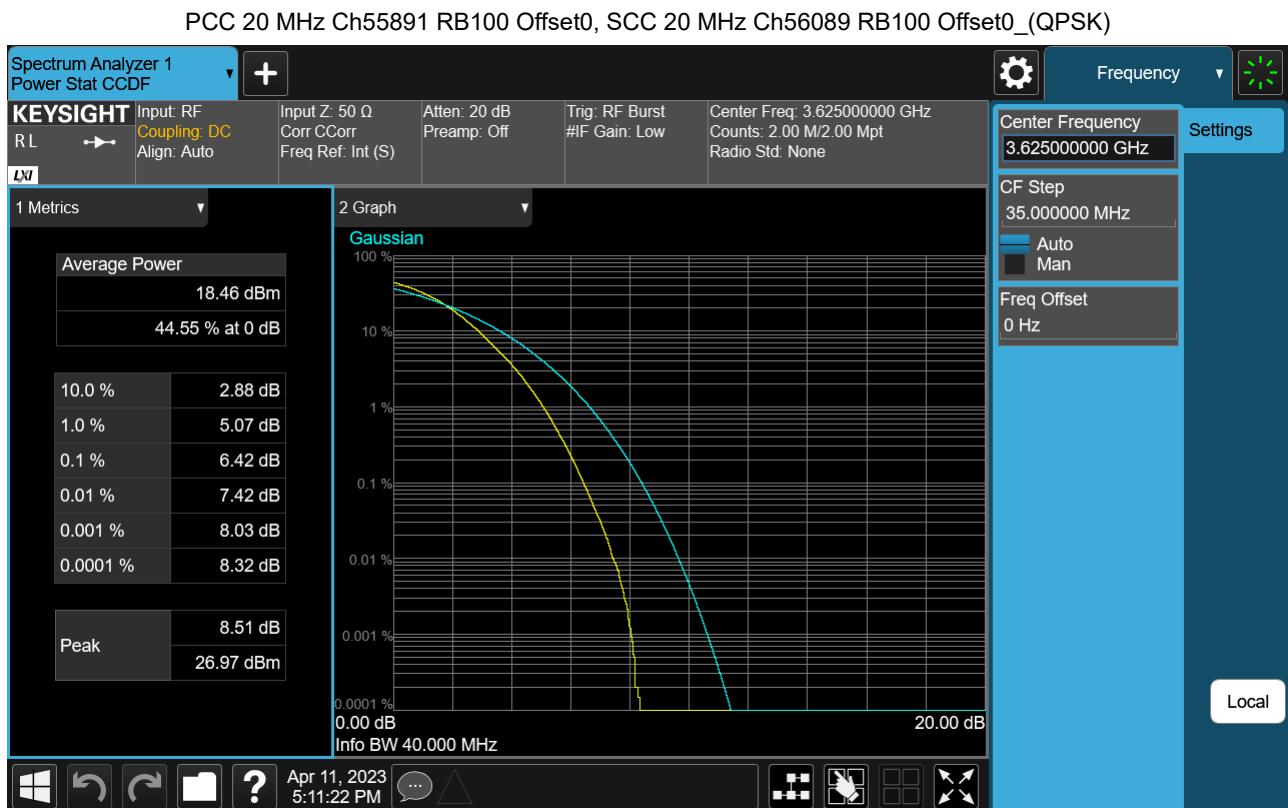



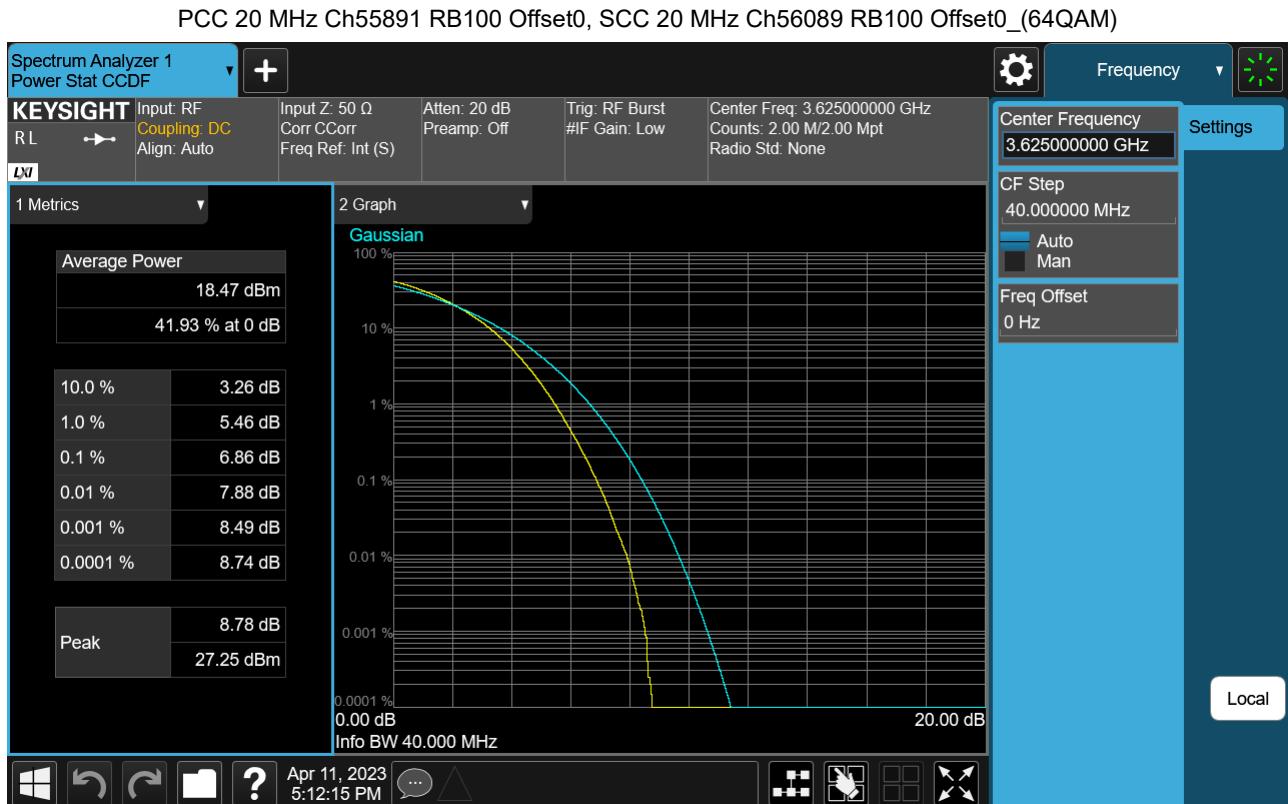

PCC 20 MHz Ch55891 RB100 Offset0, SCC 20 MHz Ch56089 RB100 Offset0_(256QAM)

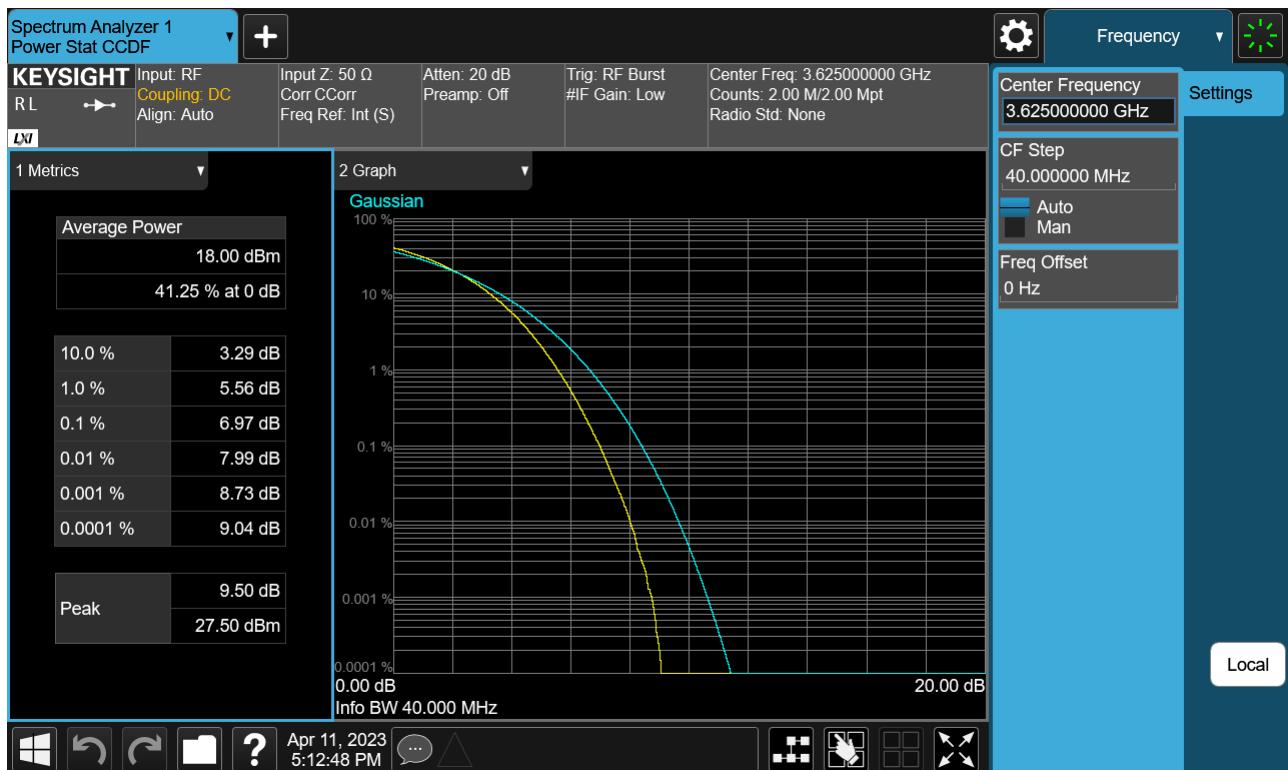


8.9 Adjacent Channel Leakage Ratio(ACLR)

Operating frequency	PCC				SCC				Adjacent Channel Leakage Ratio(dB)	
	BW [MHz]	Ch.	Freq. (MHz)	RB/Offset	BW [MHz]	Ch.	Freq. (MHz)	RB/Offset	Lower Side	Upper Side
Low	20	55340	3560.0	100/0	20	55538	3579.8	100/0	41.39	46.44
Mid	5	55898	3615.8	25/0	20	56015	3627.5	100/0	37.68	52.34
High	20	56442	3670.2	100/0	20	56640	3690.0	100/0	41.83	45.79
Mid	20	55891	3615.1	100/0	20	56089	3634.9	100/0	40.82	46.69
Limit (dB)									ACLR > 30 dB	ACLR > 30 dB


Note:

1. Duty Cycle factor already applied on the factor.
 - Duty Cycle factor(dB) = 3.979
 - Factor(dB) = Duty Cycle factor + Cable Loss + Ext. Attenuator + Power Splitter


PCC 5 MHz Ch55898 RB25 Offset0, SCC 20 MHz Ch56015 RB100 Offset0

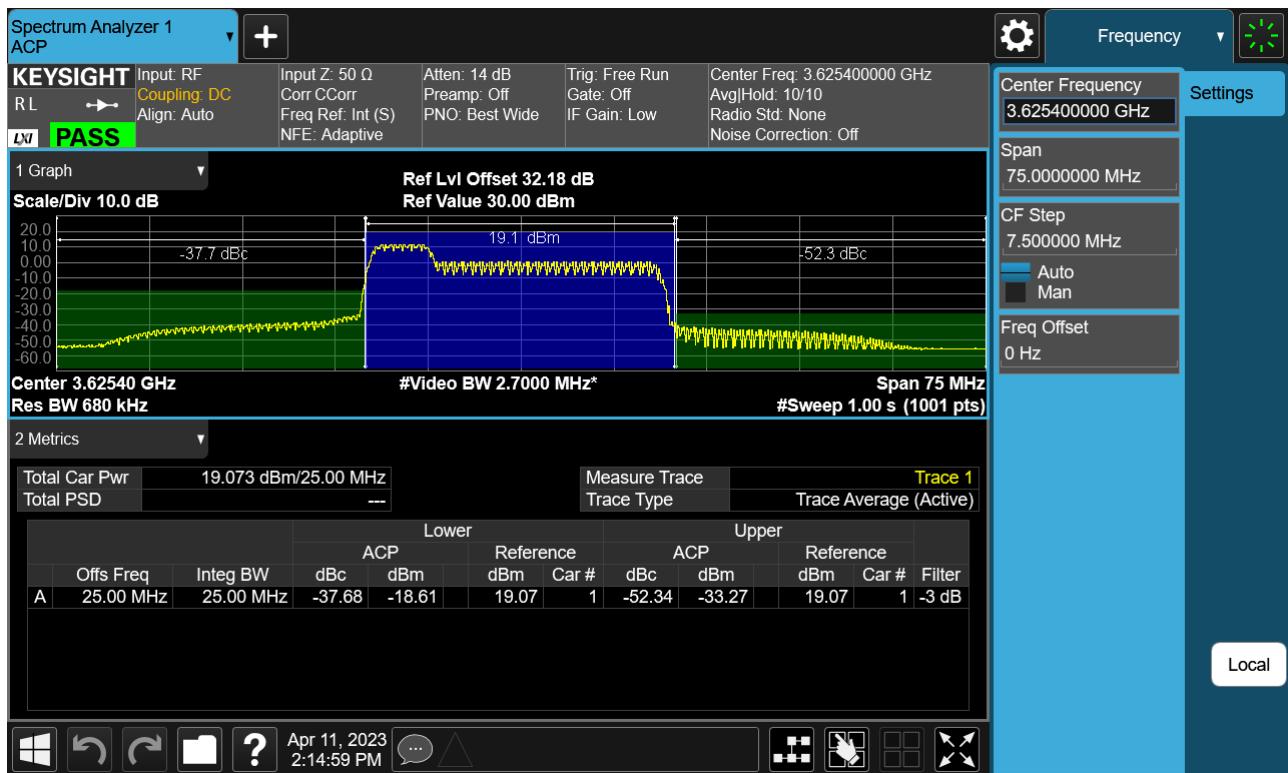


PCC 20 MHz Ch55340 RB100 Offset0, SCC 20 MHz Ch55538 RB100 Offset0

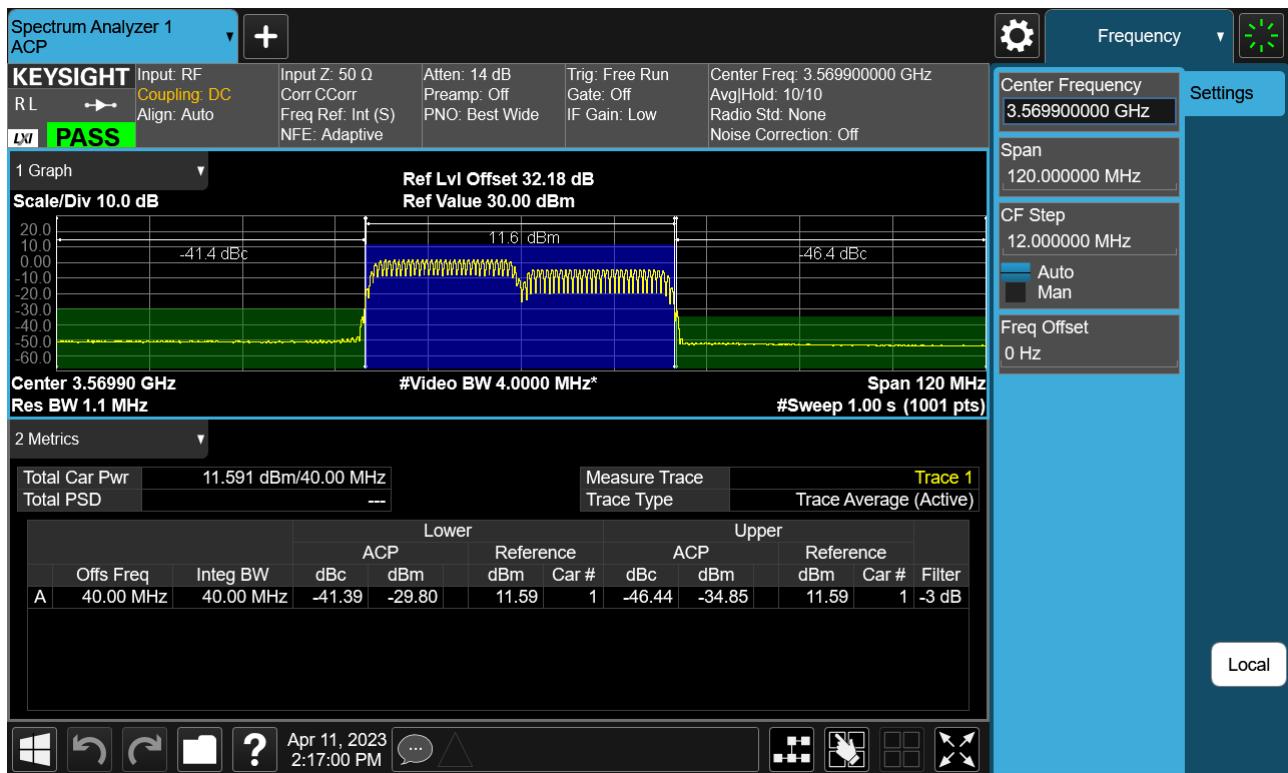

PCC 20 MHz Ch55891 RB100 Offset0, SCC 20 MHz Ch56089 RB100 Offset0

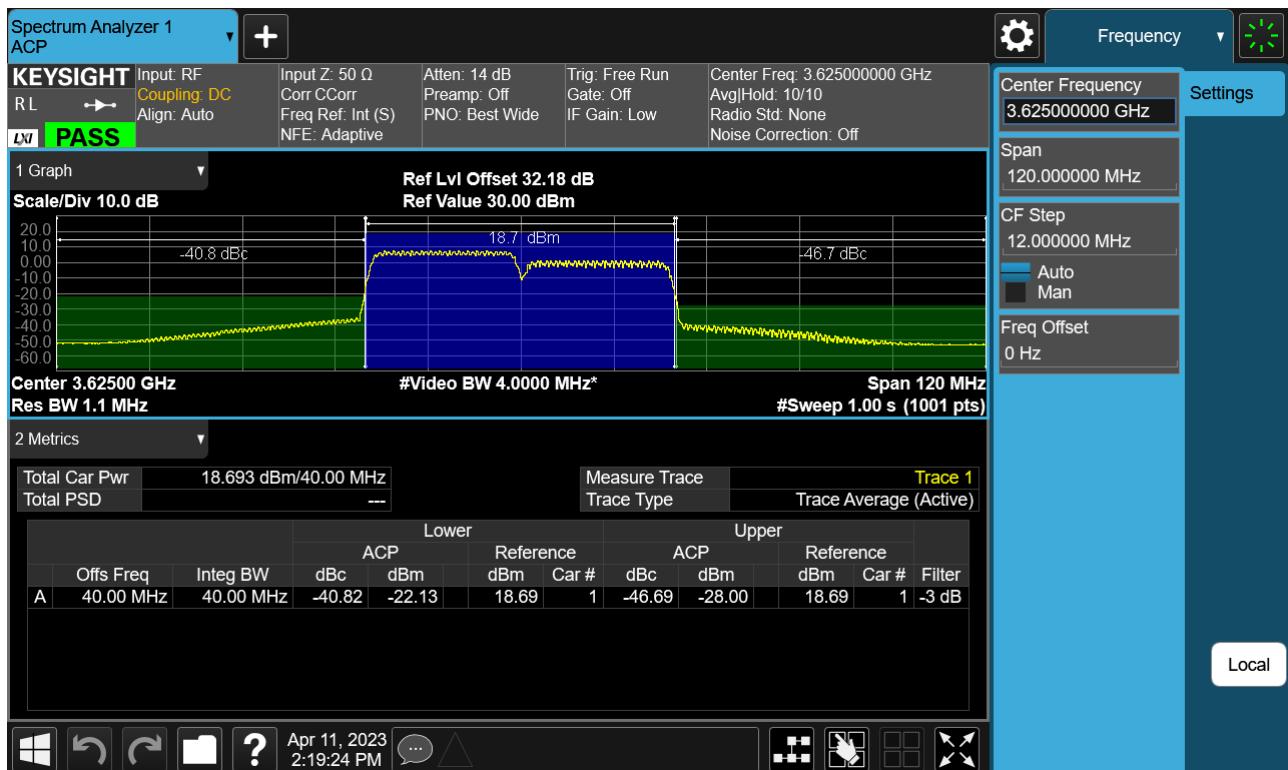

PCC 20 MHz Ch56442 RB100 Offset0, SCC 20 MHz Ch56640 RB100 Offset0

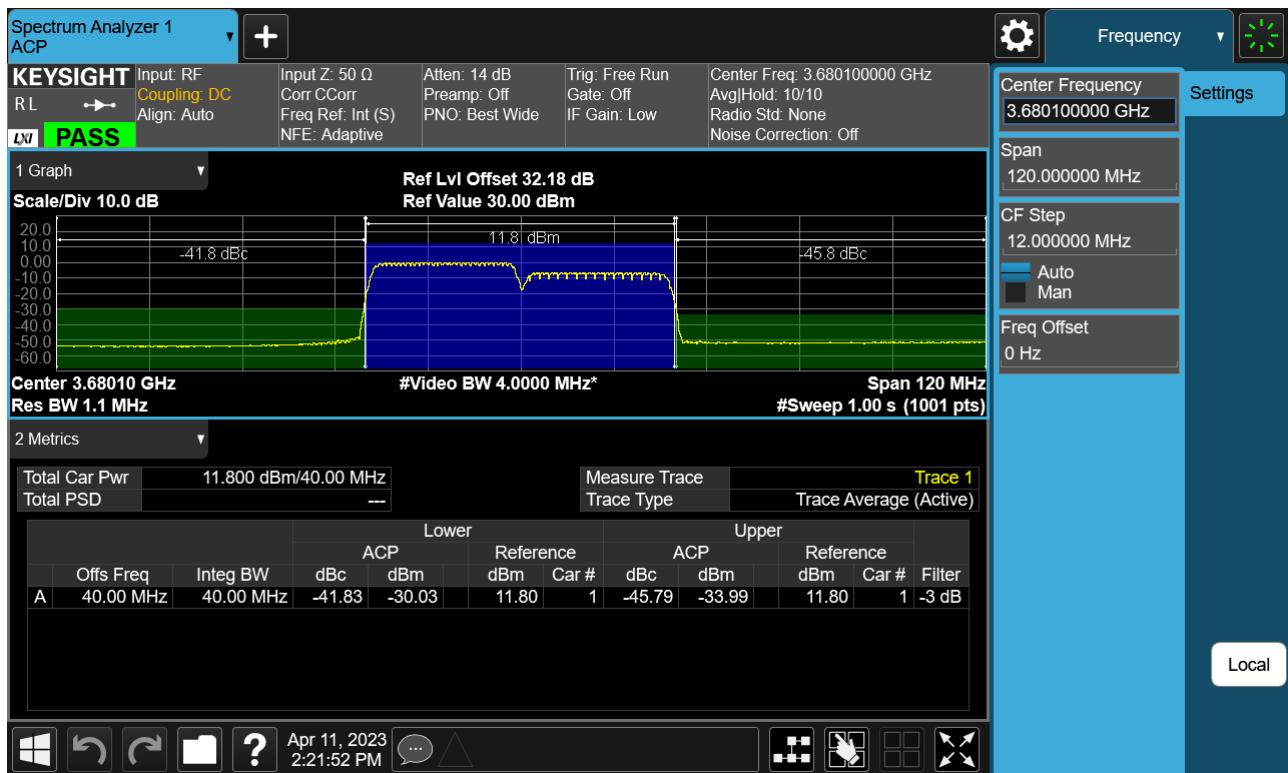

9. ANNEX A_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-2305-FC033-P