



Plot 7-103. Power Spectral Density Plot MIMO ANT1 (40MHz BW 802.11ax – 484 Tones (UNII Band 3) – Ch. 151)

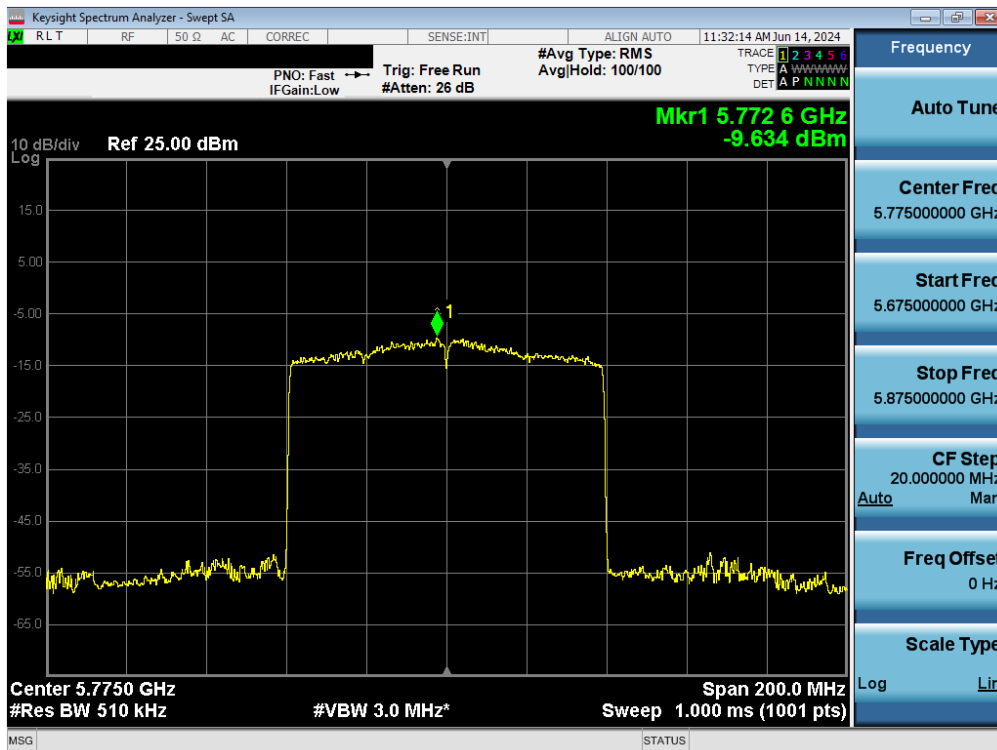


Plot 7-104. Power Spectral Density Plot MIMO ANT1 (80MHz BW 802.11ax – 996 Tones (UNII Band 3) – Ch. 155)

FCC ID: A3LSMX828U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2405140039-13.A3L	Test Dates: 5/23/2024 - 7/28/2024	EUT Type: Portable Tablet	Page 79 of 138

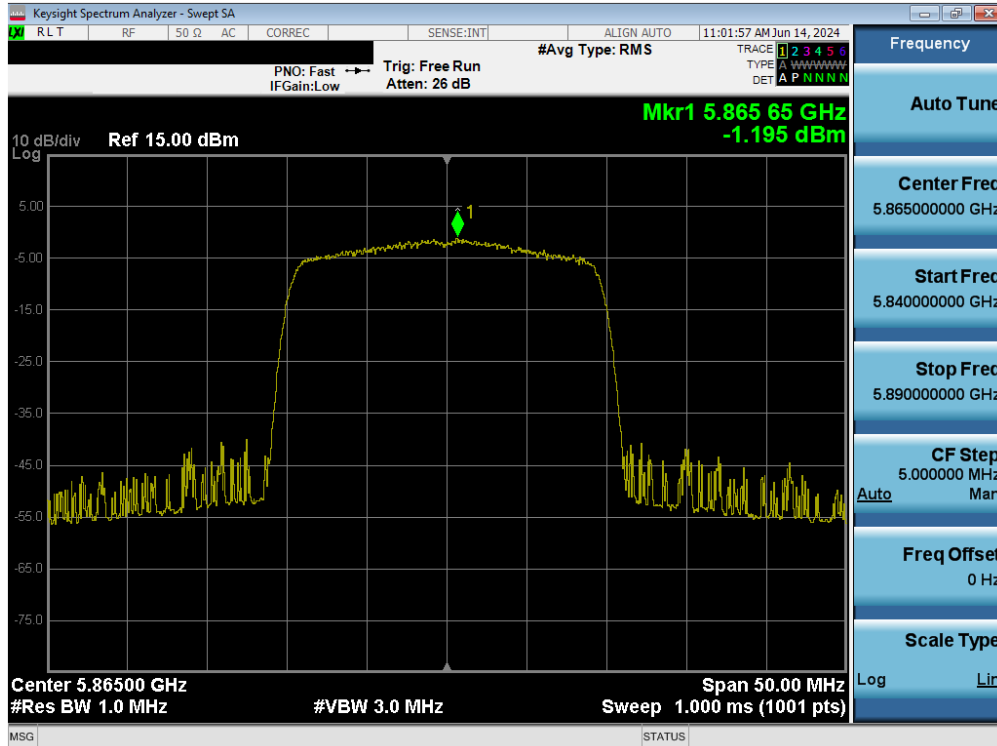


Plot 7-105. Power Spectral Density Plot MIMO ANT1 (20MHz BW 802.11ax – 242 Tones (UNII Band 4) – Ch. 173)

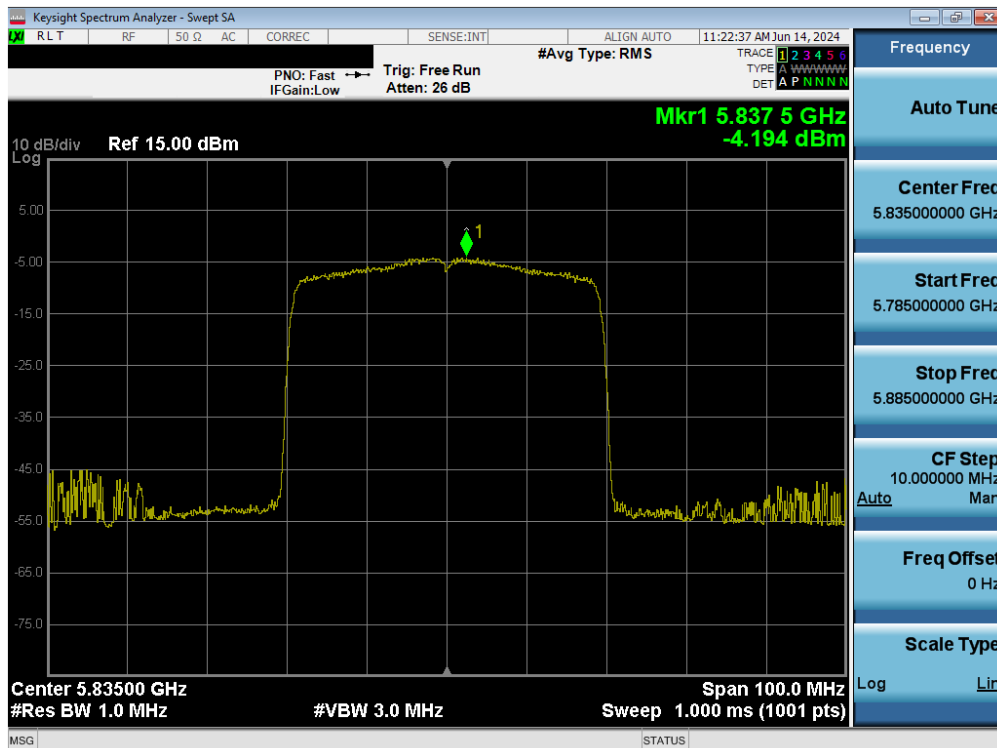


Plot 7-106. Power Spectral Density Plot MIMO ANT1 (40MHz BW 802.11ax – 484 Tones (UNII Band 3/4) – Ch. 167)

FCC ID: A3LSMX828U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2405140039-13.A3L	Test Dates: 5/23/2024 - 7/28/2024	EUT Type: Portable Tablet	Page 80 of 138

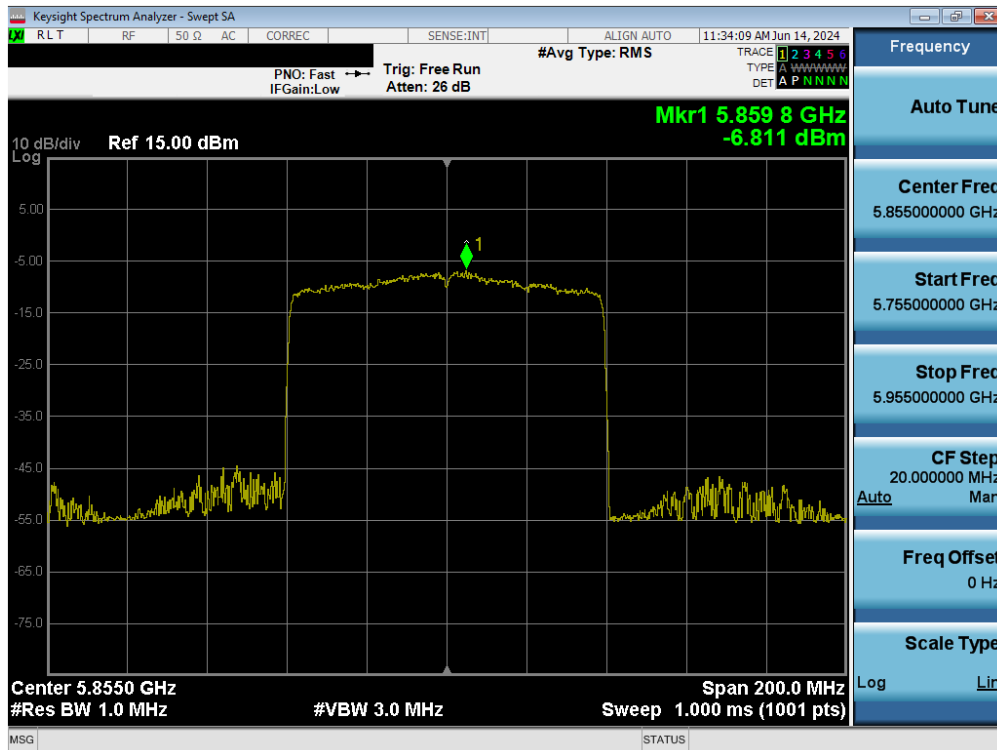


Plot 7-107. Power Spectral Density Plot MIMO ANT1 (80MHz BW 802.11ax – 996 Tones (UNII Band 3/4) – Ch. 171)

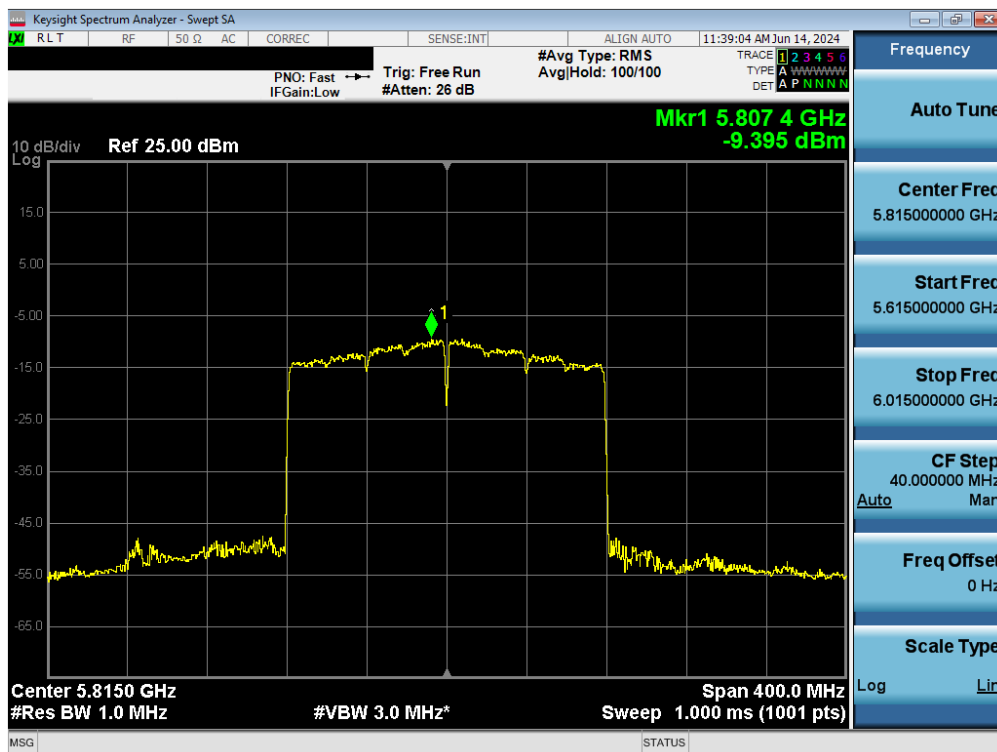


Plot 7-108. Power Spectral Density Plot MIMO ANT1 (160MHz BW 802.11ax – 996\*2 Tones (UNII Band 3/4) – Ch. 163)

FCC ID: A3LSMX828U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2405140039-13.A3L	Test Dates: 5/23/2024 - 7/28/2024	EUT Type: Portable Tablet	Page 81 of 138

## 7.5.2 MIMO Antenna-2 Power Spectral Density Measurements

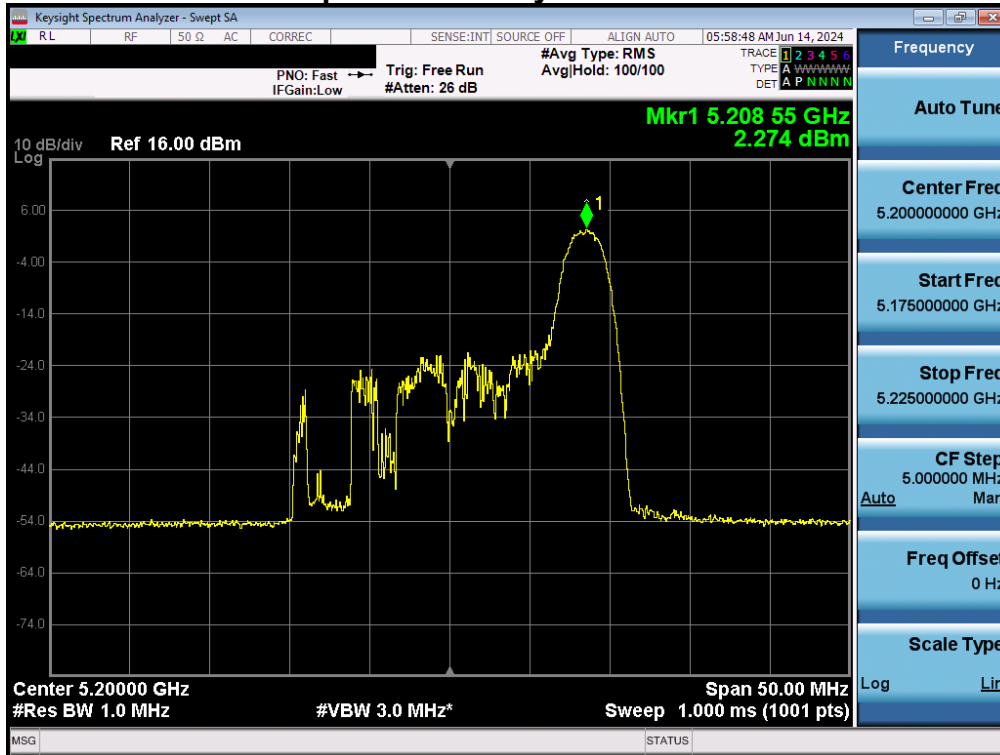

Plot 7-109. Power Spectral Density Plot MIMO ANT2 (20MHz BW 802.11ax – 26 Tones (UNII Band 1) – Ch. 40)

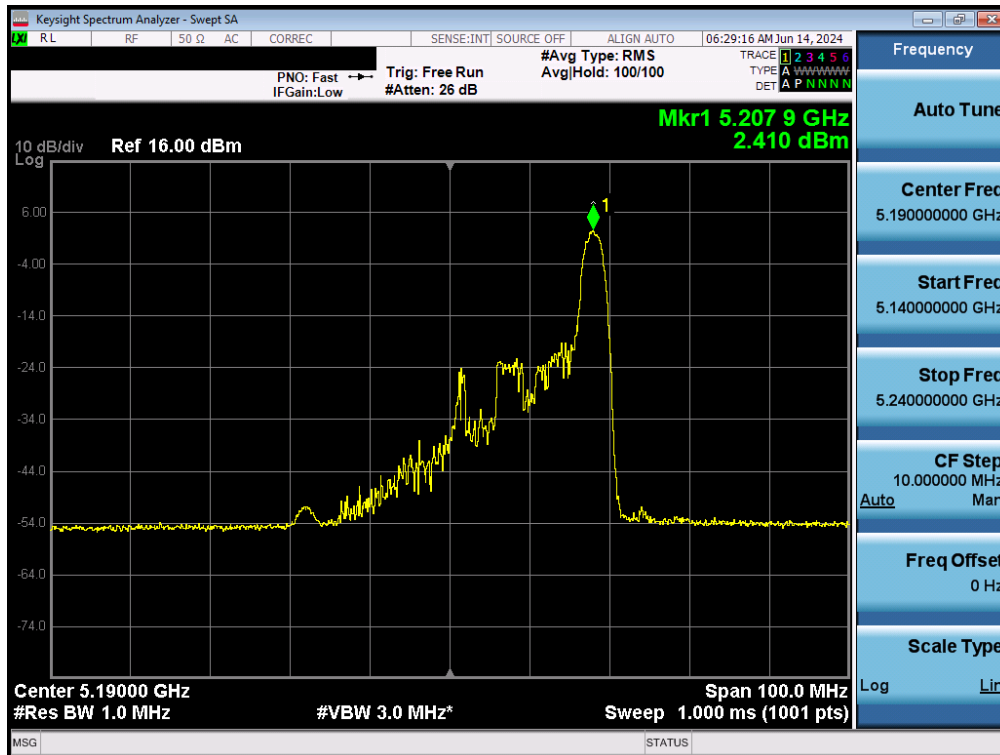


Plot 7-110. Power Spectral Density Plot MIMO ANT2 (40MHz BW 802.11ax – 26 Tones (UNII Band 1) – Ch. 38)

FCC ID: A3LSMX828U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2405140039-13.A3L	Test Dates: 5/23/2024 - 7/28/2024	EUT Type: Portable Tablet	Page 82 of 138




Plot 7-111. Power Spectral Density Plot MIMO ANT2 (80MHz BW 802.11ax – 26 Tones (UNII Band 1) – Ch. 42)

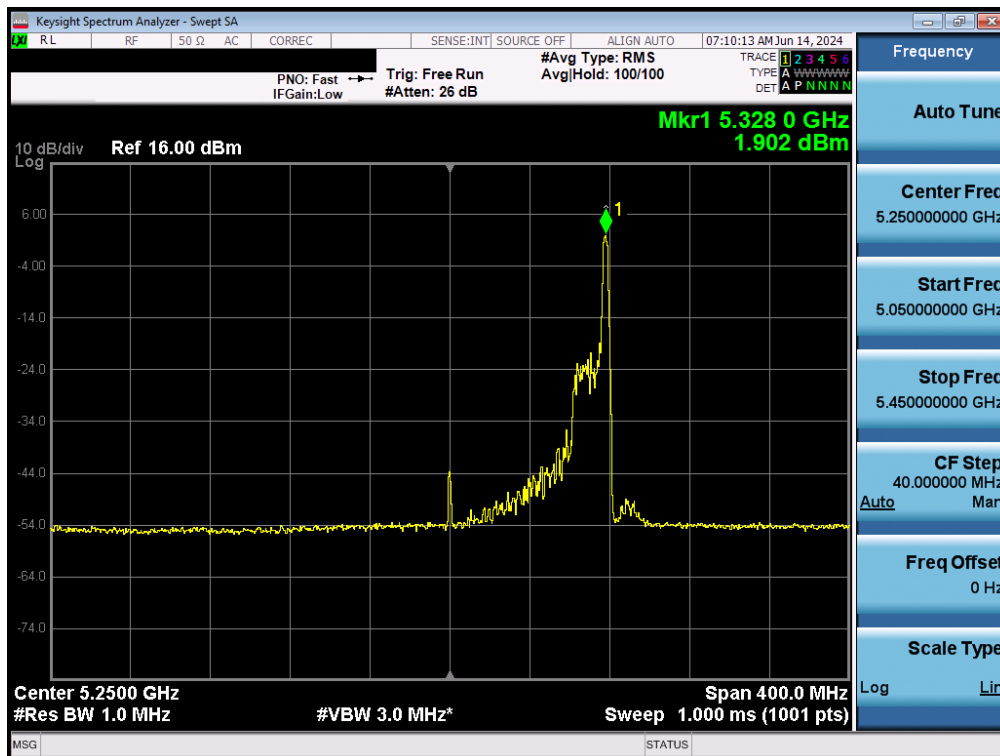


Plot 7-112. Power Spectral Density Plot MIMO ANT2 (160MHz BW 802.11ax – 26 Tones (UNII Band 1/2A) – Ch. 50)

FCC ID: A3LSMX828U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2405140039-13.A3L	Test Dates: 5/23/2024 - 7/28/2024	EUT Type: Portable Tablet	Page 83 of 138

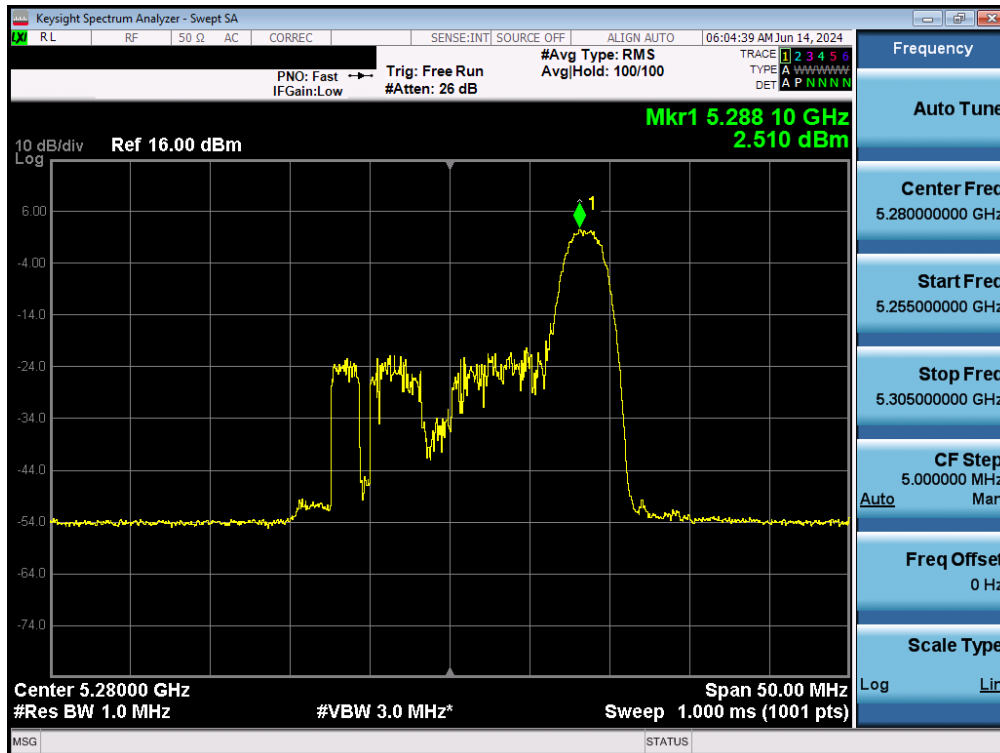


Plot 7-113. Power Spectral Density Plot MIMO ANT2 (20MHz BW 802.11ax – 26 Tones (UNII Band 2A) – Ch. 56)

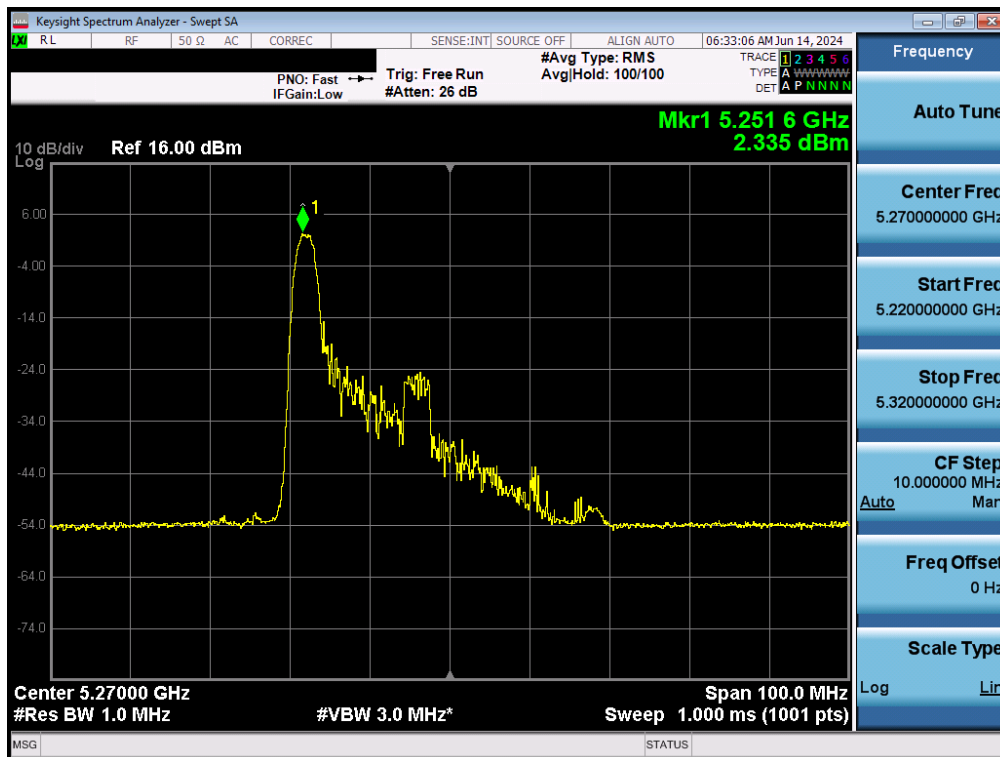


Plot 7-114. Power Spectral Density Plot MIMO ANT2 (40MHz BW 802.11ax – 26 Tones (UNII Band 2A) – Ch. 54)

FCC ID: A3LSMX828U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2405140039-13.A3L	Test Dates: 5/23/2024 - 7/28/2024	EUT Type: Portable Tablet	Page 84 of 138

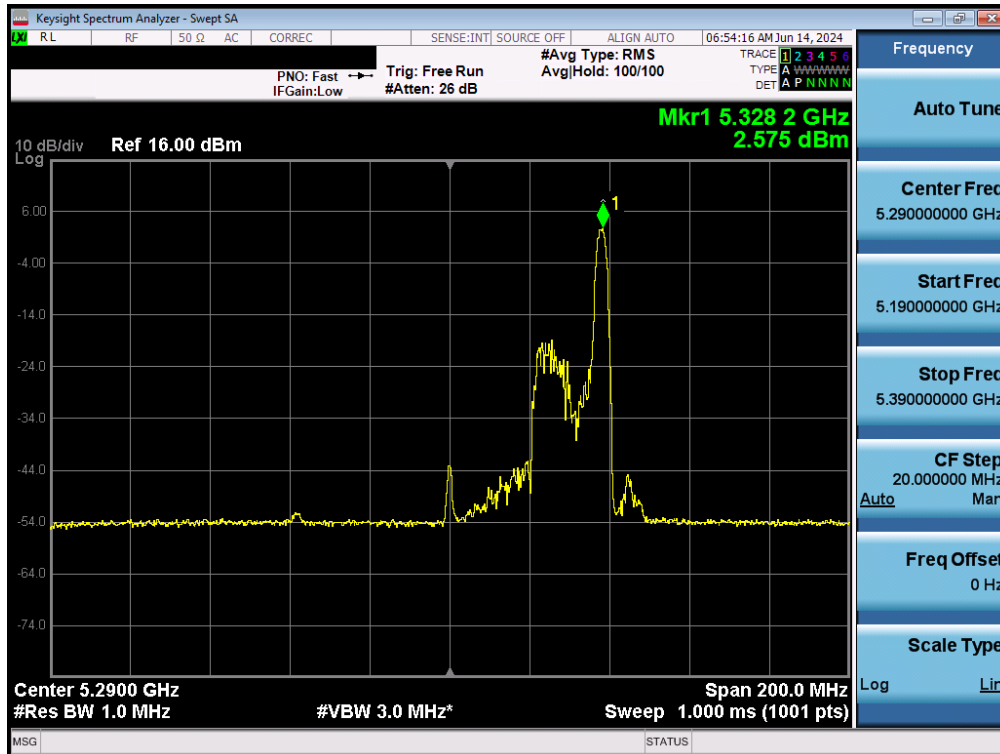

Plot 7-115. Power Spectral Density Plot MIMO ANT2 (80MHz BW 802.11ax – 26 Tones (UNII Band 2A) – Ch. 58)

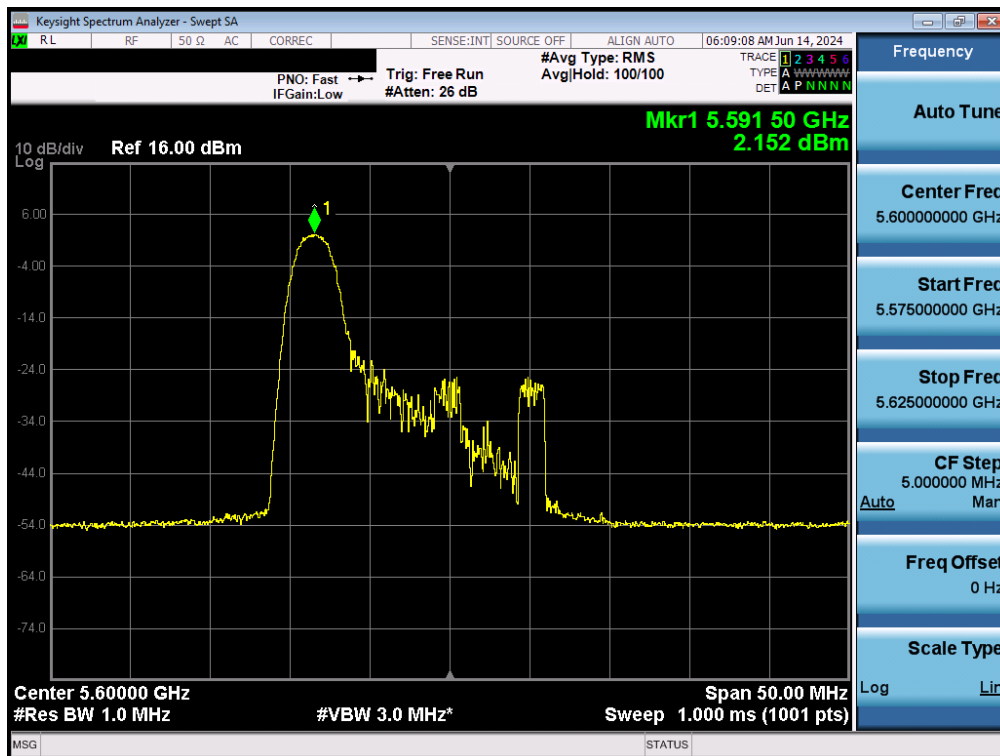


Plot 7-116. Power Spectral Density Plot MIMO ANT2 (20MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 120)

FCC ID: A3LSMX828U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2405140039-13.A3L	Test Dates: 5/23/2024 - 7/28/2024	EUT Type: Portable Tablet	Page 85 of 138




Plot 7-117. Power Spectral Density Plot MIMO ANT2 (40MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 118)

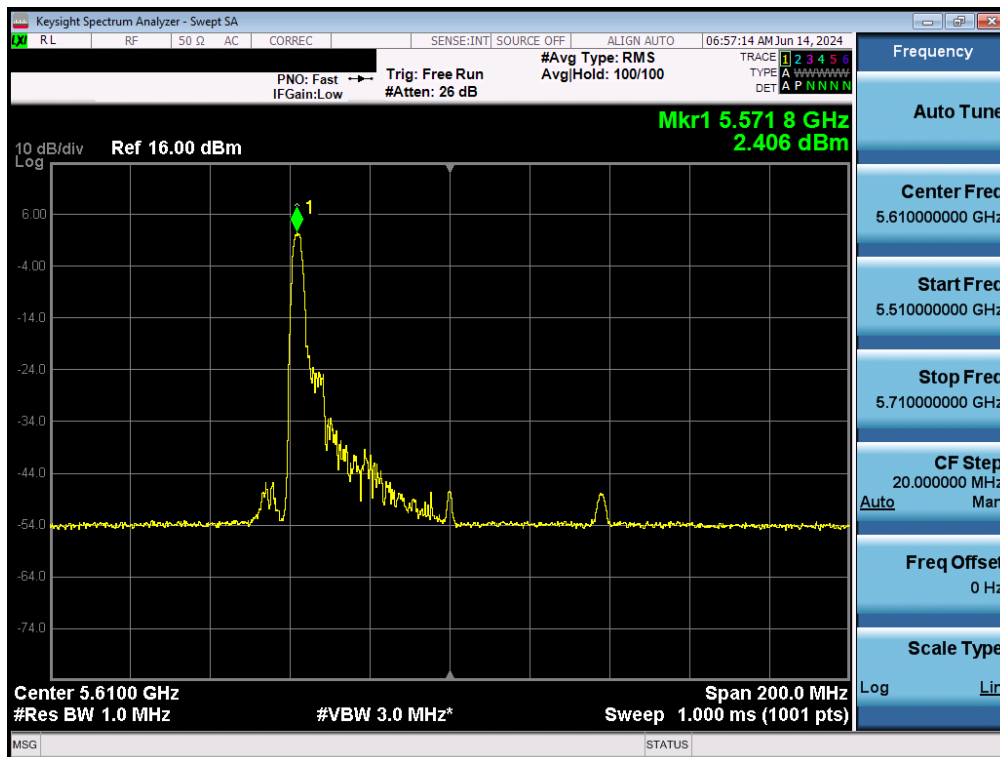


Plot 7-118. Power Spectral Density Plot MIMO ANT2 (80MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 122)

FCC ID: A3LSMX828U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2405140039-13.A3L	Test Dates: 5/23/2024 - 7/28/2024	EUT Type: Portable Tablet	Page 86 of 138



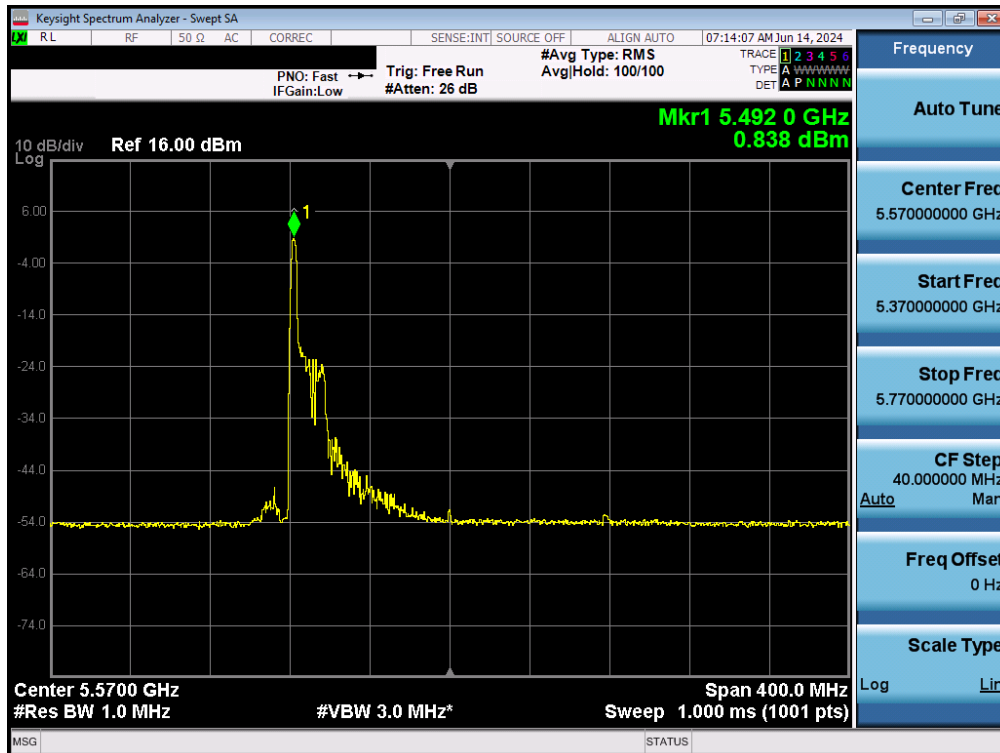

Plot 7-119. Power Spectral Density Plot MIMO ANT2 (160MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 114)

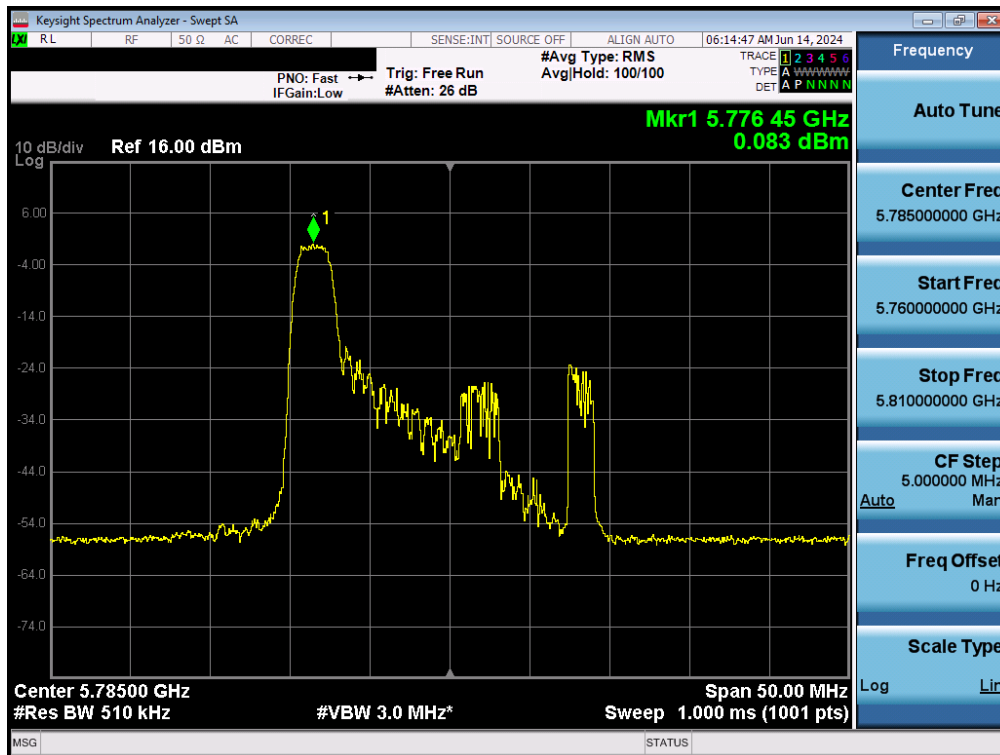


Plot 7-120. Power Spectral Density Plot MIMO ANT2 (20MHz BW 802.11ax – 26 Tones (UNII Band 3) – Ch. 157)

FCC ID: A3LSMX828U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2405140039-13.A3L	Test Dates: 5/23/2024 - 7/28/2024	EUT Type: Portable Tablet	Page 87 of 138




Plot 7-121. Power Spectral Density Plot MIMO ANT2 (40MHz BW 802.11ax – 26 Tones (UNII Band 3) – Ch. 151)

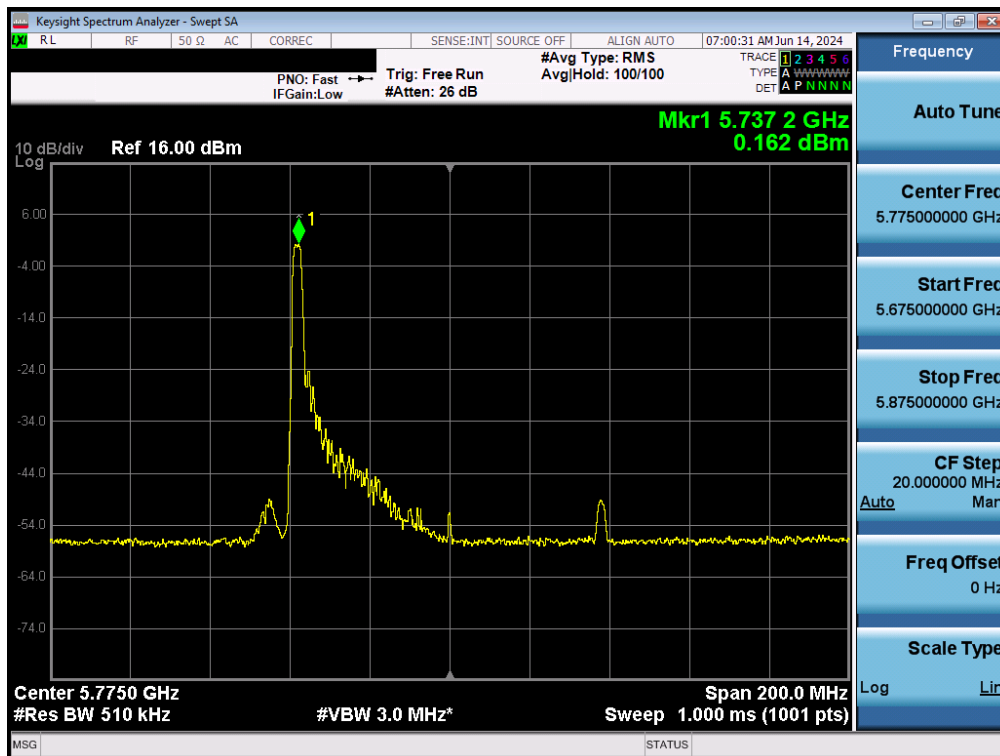


Plot 7-122. Power Spectral Density Plot MIMO ANT2 (80MHz BW 802.11ax – 26 Tones (UNII Band 3) – Ch. 155)

FCC ID: A3LSMX828U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2405140039-13.A3L	Test Dates: 5/23/2024 - 7/28/2024	EUT Type: Portable Tablet	Page 88 of 138

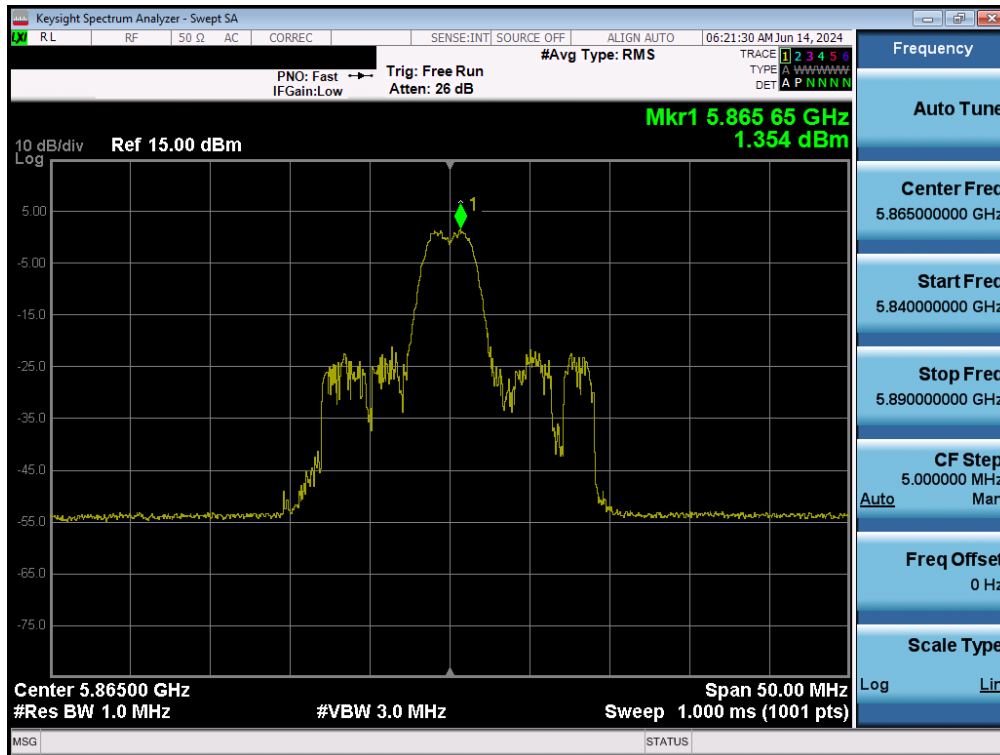

Plot 7-123. Power Spectral Density Plot MIMO ANT2 (20MHz BW 802.11ax – 26 Tones (UNII Band 4) – Ch. 173)

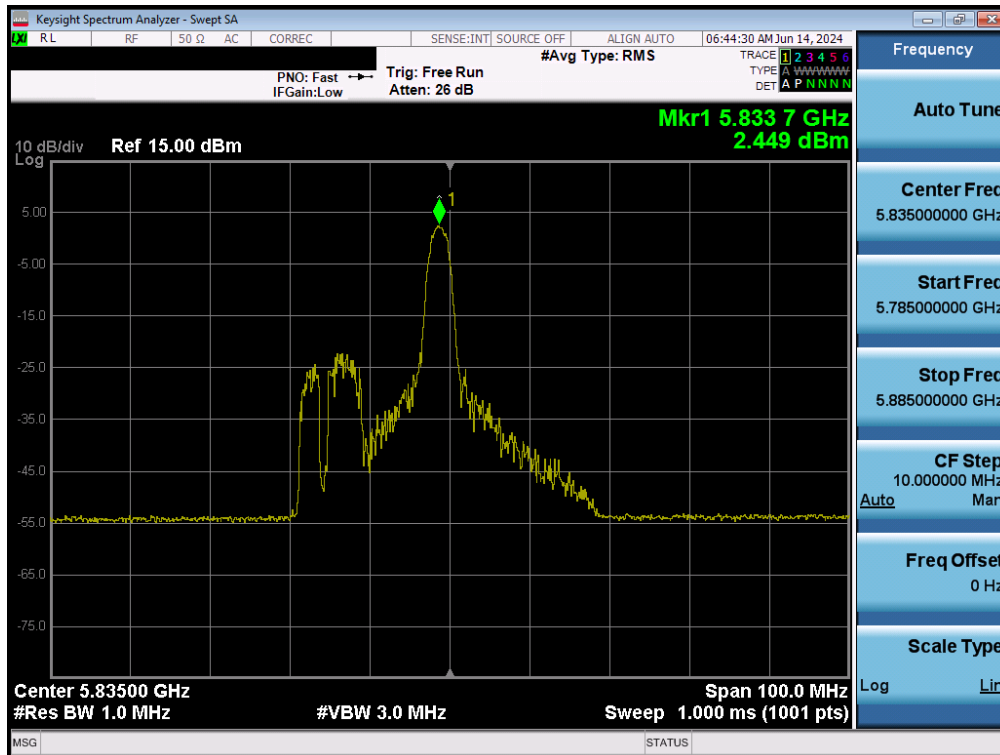


Plot 7-124. Power Spectral Density Plot MIMO ANT2 (40MHz BW 802.11ax – 26 Tones (UNII Band 3/4) – Ch. 167)

FCC ID: A3LSMX828U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2405140039-13.A3L	Test Dates: 5/23/2024 - 7/28/2024	EUT Type: Portable Tablet	Page 89 of 138




Plot 7-125. Power Spectral Density Plot MIMO ANT2 (80MHz BW 802.11ax – 26 Tones (UNII Band 3/4) – Ch. 171)

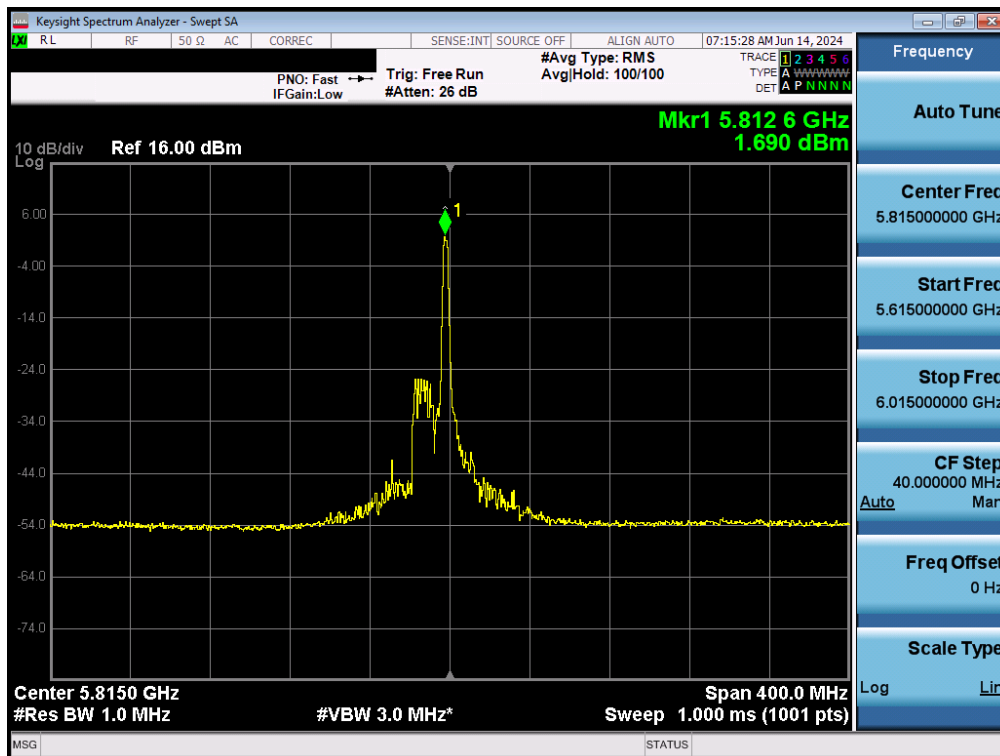


Plot 7-126. Power Spectral Density Plot MIMO ANT2 (160MHz BW 802.11ax – 26 Tones (UNII Band 3/4) – Ch. 163)

FCC ID: A3LSMX828U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2405140039-13.A3L	Test Dates: 5/23/2024 - 7/28/2024	EUT Type: Portable Tablet	Page 90 of 138

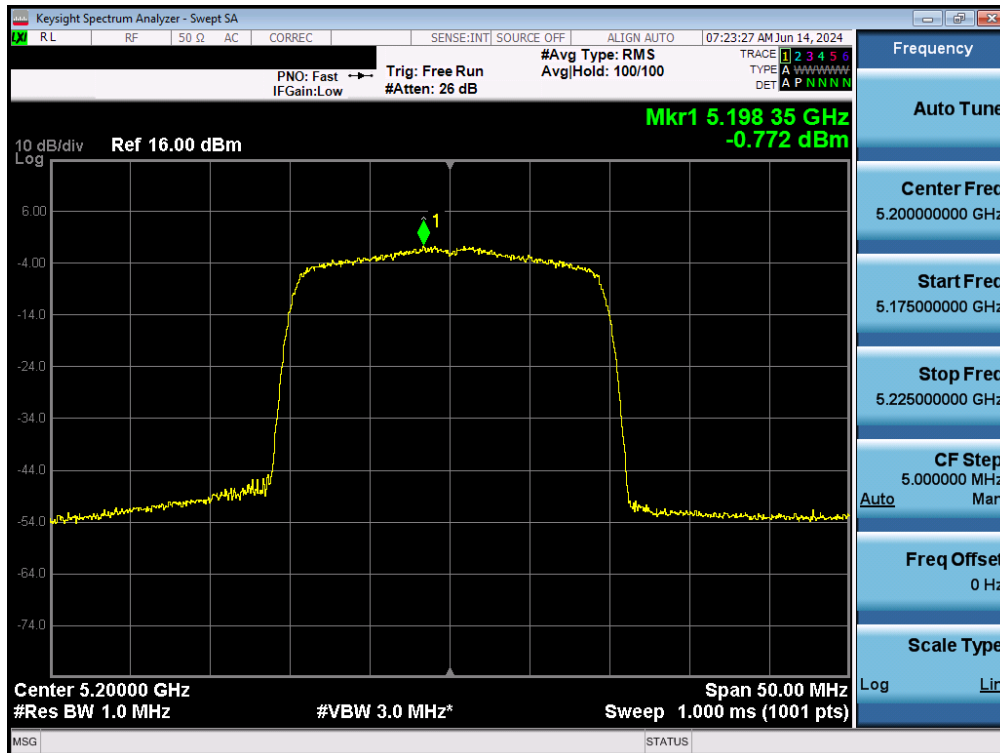


Plot 7-127. Power Spectral Density Plot MIMO ANT2 (20MHz BW 802.11ax – 242 Tones (UNII Band 1) – Ch. 40)

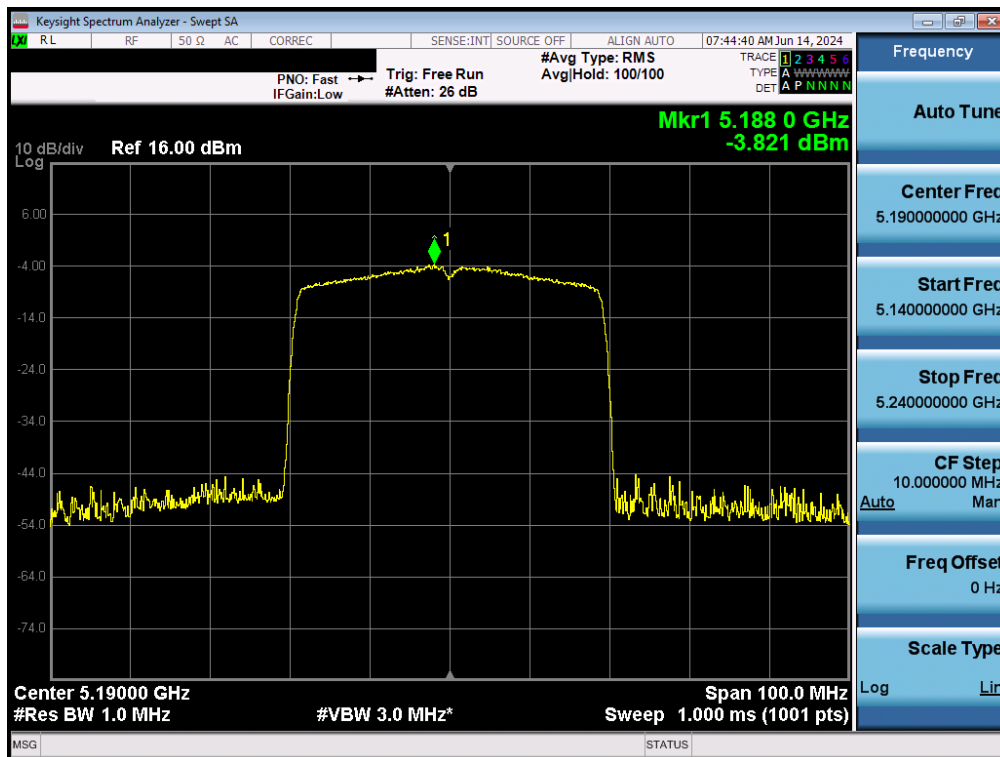


Plot 7-128. Power Spectral Density Plot MIMO ANT2 (40MHz BW 802.11ax – 484 Tones (UNII Band 1) – Ch. 38)

FCC ID: A3LSMX828U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2405140039-13.A3L	Test Dates: 5/23/2024 - 7/28/2024	EUT Type: Portable Tablet	Page 91 of 138

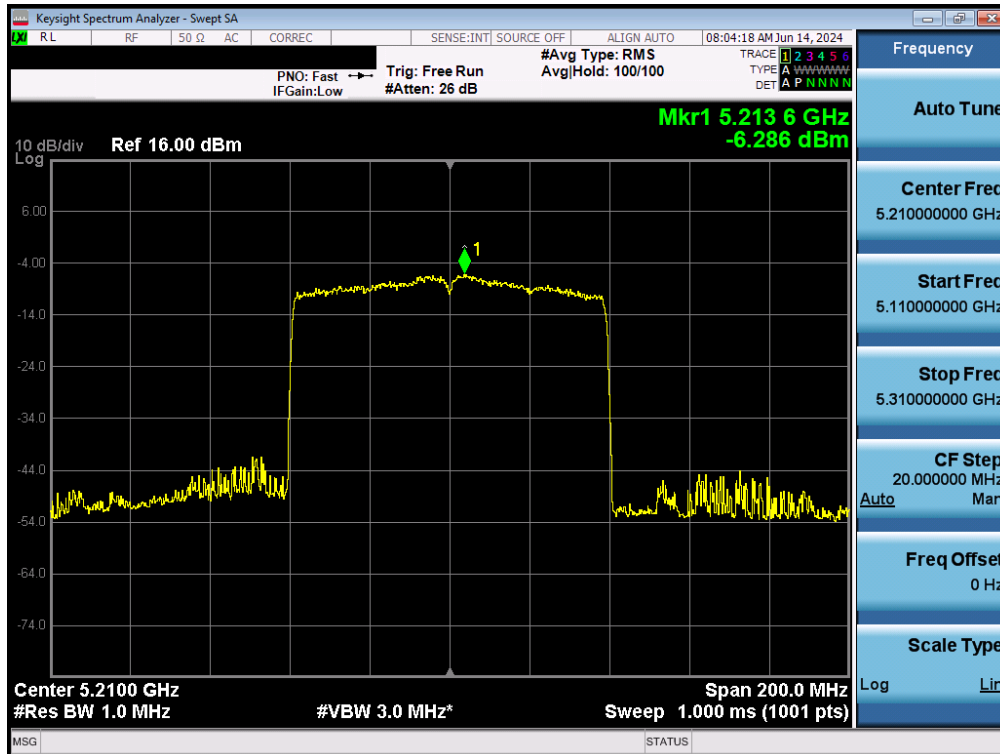


Plot 7-129. Power Spectral Density Plot MIMO ANT2 (80MHz BW 802.11ax – 996 Tones (UNII Band 1) – Ch. 42)

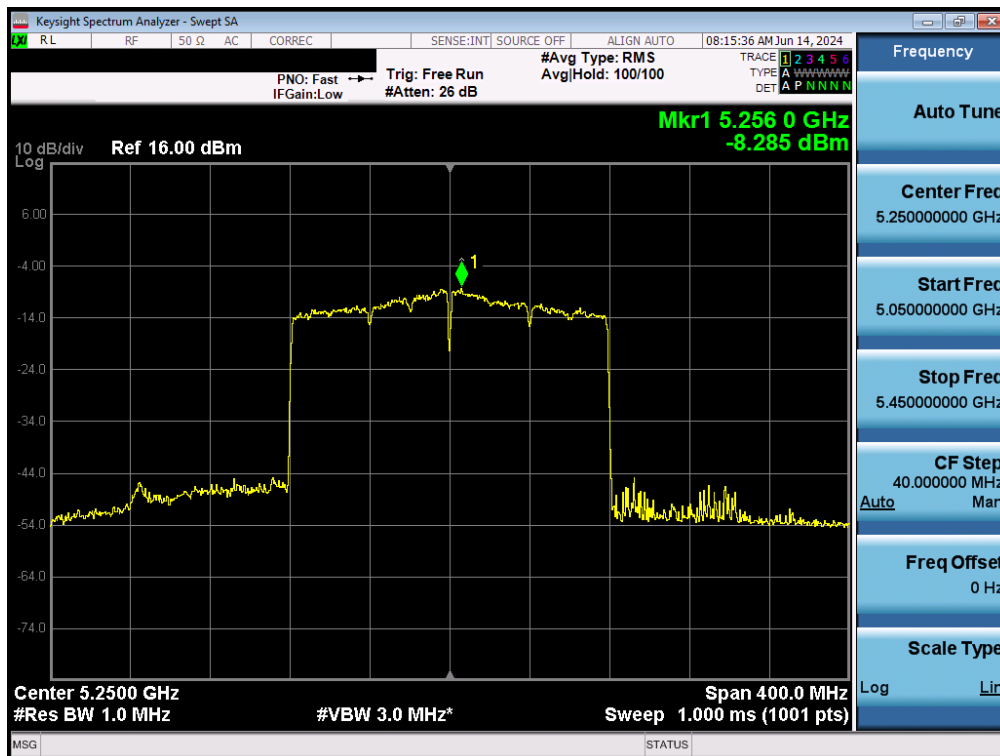


Plot 7-130. Power Spectral Density Plot MIMO ANT2 (160MHz BW 802.11ax – 2x996 Tones (UNII Band 1/2A) – Ch. 50)

FCC ID: A3LSMX828U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2405140039-13.A3L	Test Dates: 5/23/2024 - 7/28/2024	EUT Type: Portable Tablet	Page 92 of 138

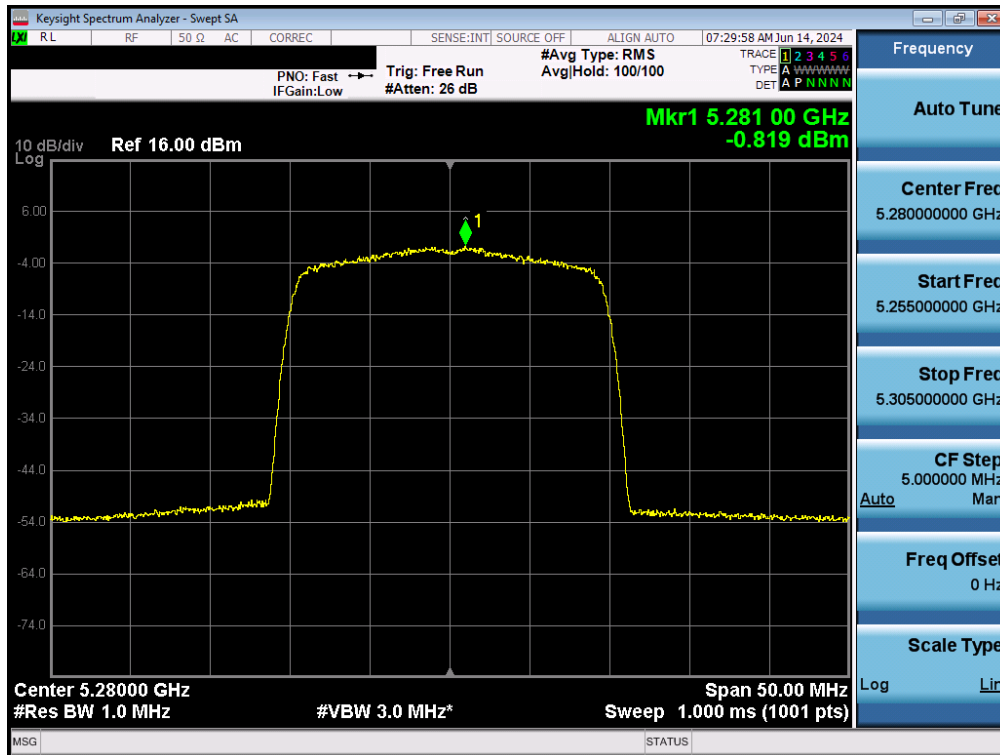


Plot 7-131. Power Spectral Density Plot MIMO ANT2 (20MHz BW 802.11ax – 242 Tones (UNII Band 2A) – Ch. 56)

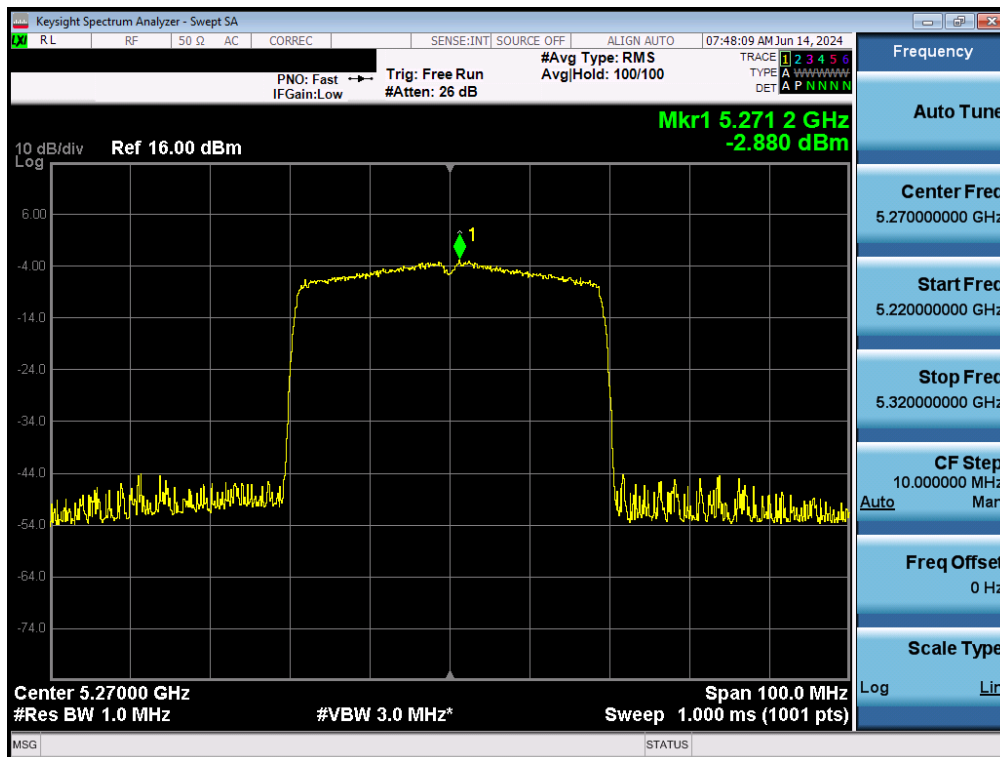


Plot 7-132. Power Spectral Density Plot MIMO ANT2 (40MHz BW 802.11ax – 484 Tones (UNII Band 2A) – Ch. 54)

FCC ID: A3LSMX828U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2405140039-13.A3L	Test Dates: 5/23/2024 - 7/28/2024	EUT Type: Portable Tablet	Page 93 of 138



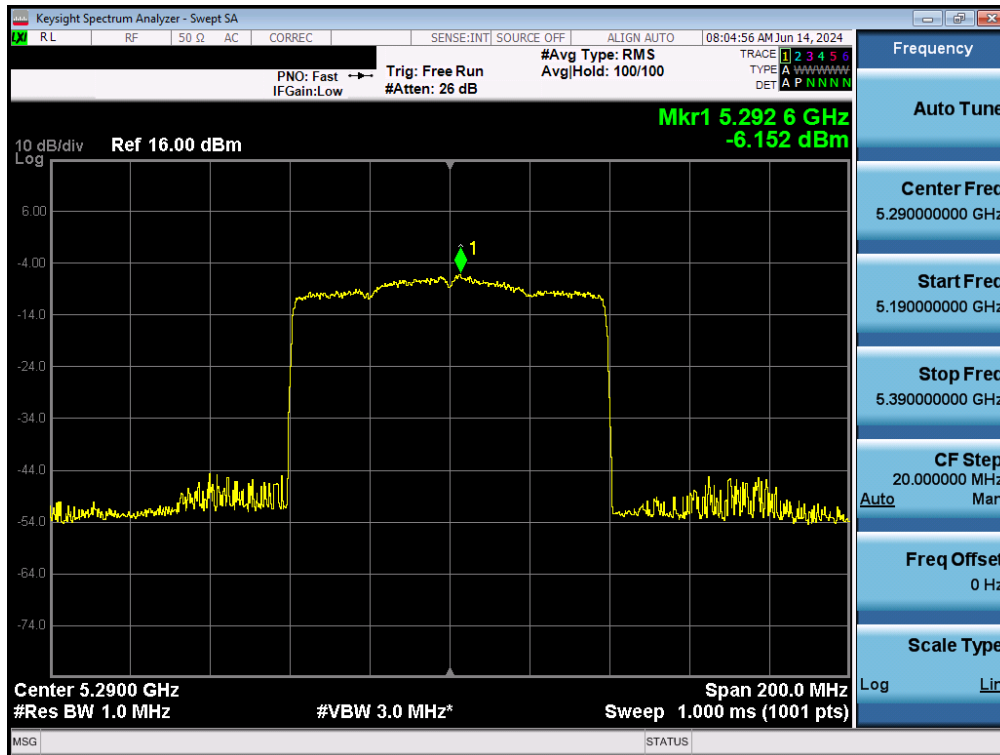


Plot 7-133. Power Spectral Density Plot MIMO ANT2 (80MHz BW 802.11ax – 996 Tones (UNII Band 2A) – Ch. 58)

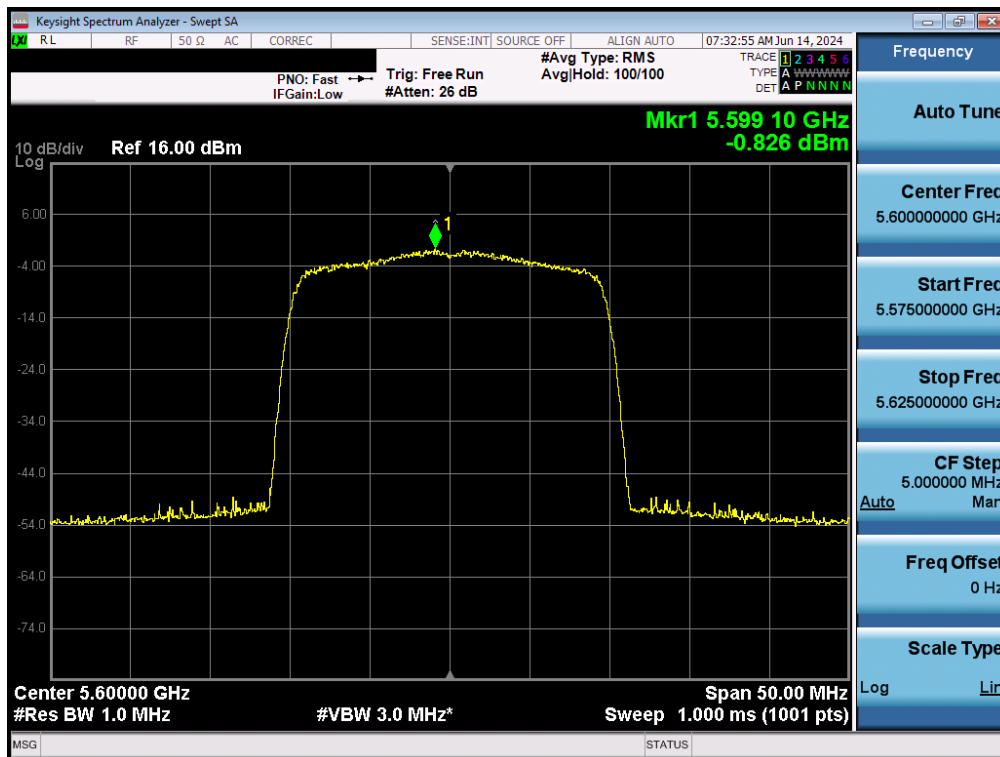


Plot 7-134. Power Spectral Density Plot MIMO ANT2 (20MHz BW 802.11ax – 242 Tones (UNII Band 2C) – Ch. 120)

FCC ID: A3LSMX828U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2405140039-13.A3L	Test Dates: 5/23/2024 - 7/28/2024	EUT Type: Portable Tablet	Page 94 of 138



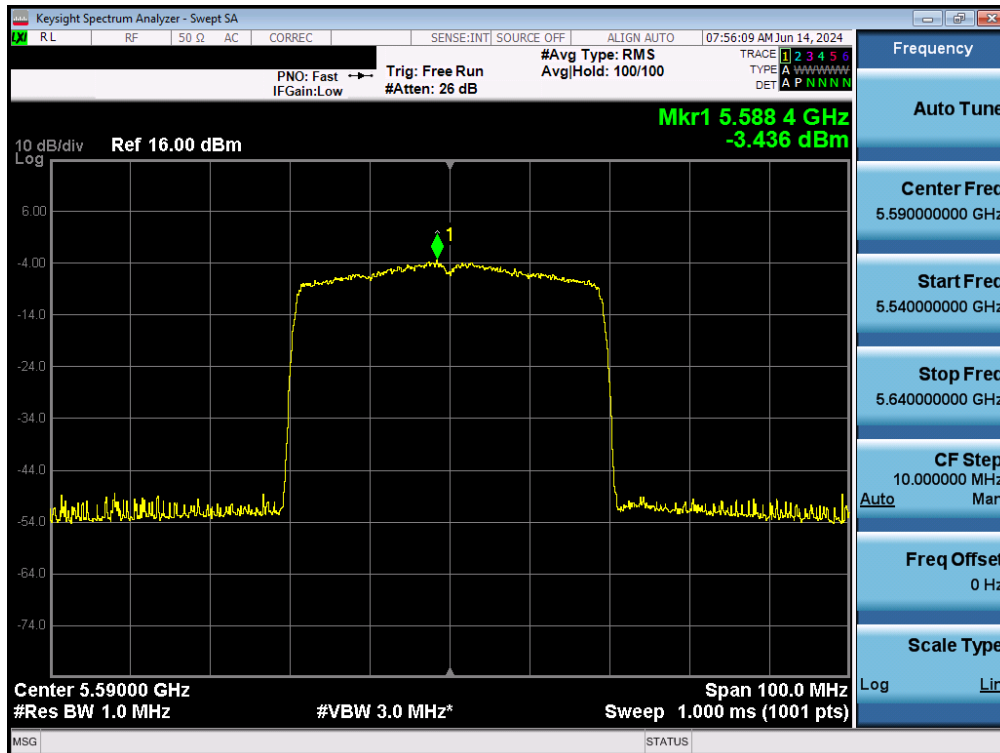


Plot 7-135. Power Spectral Density Plot MIMO ANT2 (40MHz BW 802.11ax – 484 Tones (UNII Band 2C) – Ch. 118)

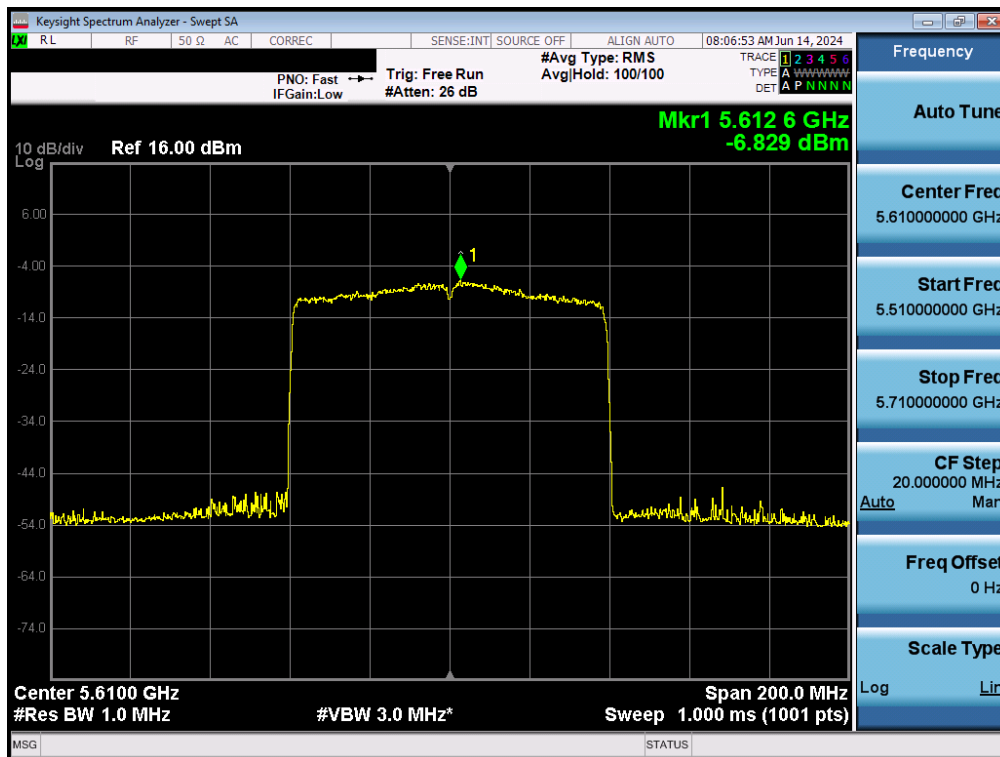


Plot 7-136. Power Spectral Density Plot MIMO ANT2 (80MHz BW 802.11ax – 996 Tones (UNII Band 2C) – Ch. 122)

FCC ID: A3LSMX828U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2405140039-13.A3L	Test Dates: 5/23/2024 - 7/28/2024	EUT Type: Portable Tablet	Page 95 of 138

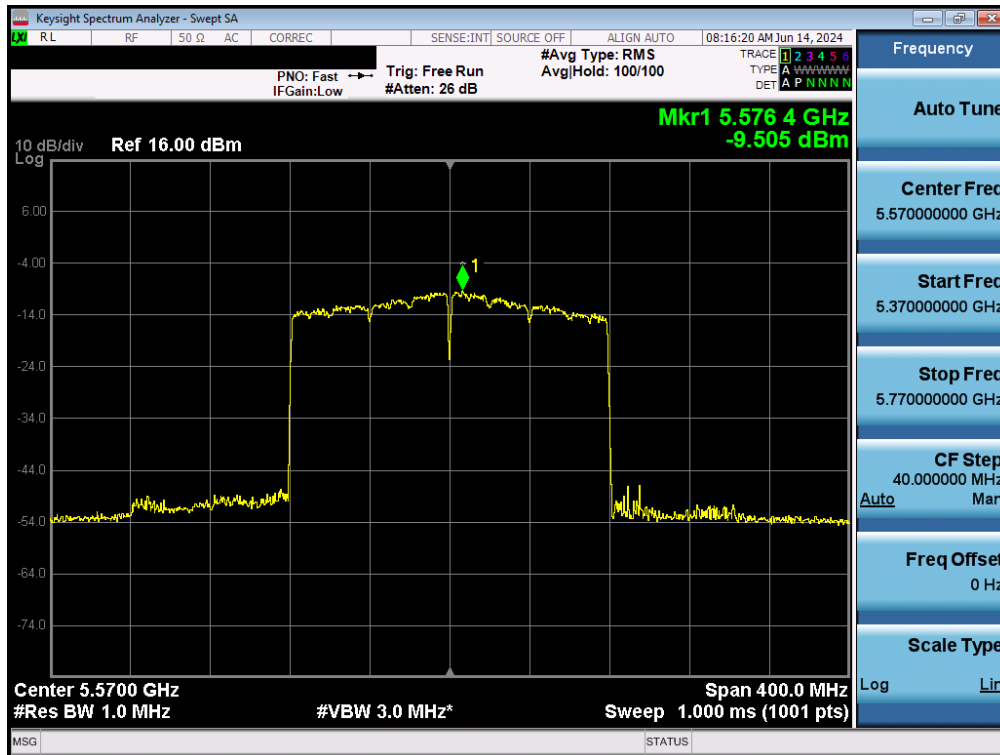


Plot 7-137. Power Spectral Density Plot MIMO ANT2 (160MHz BW 802.11ax – 2x996 Tones (UNII Band 2C) – Ch. 114)

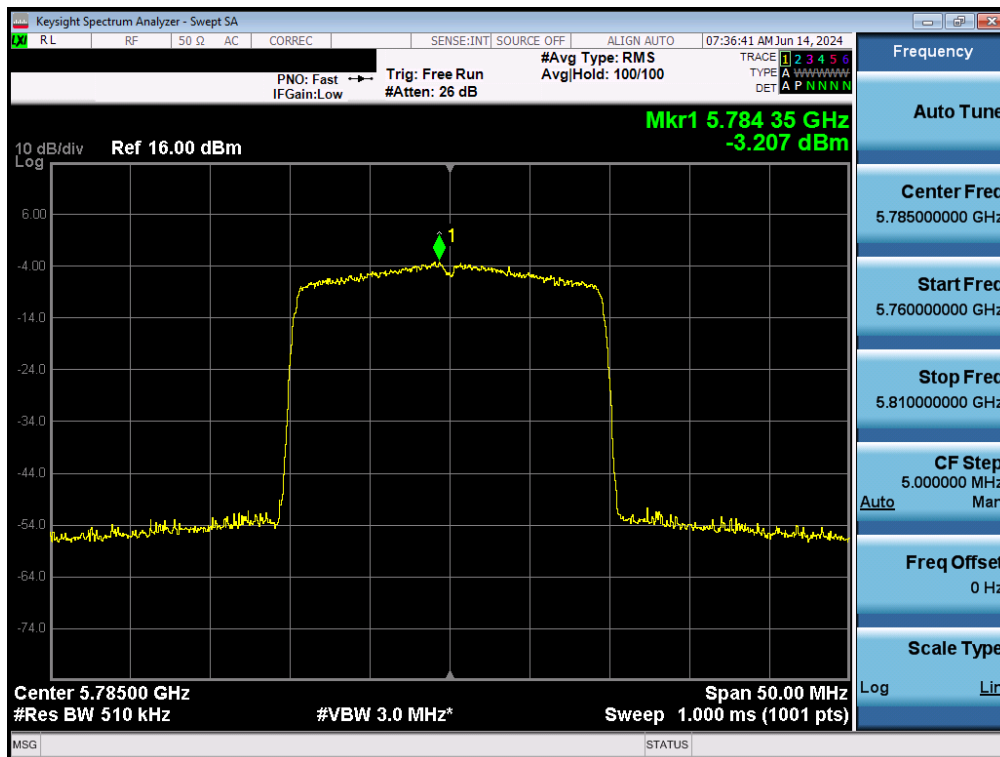


Plot 7-138. Power Spectral Density Plot MIMO ANT2 (20MHz BW 802.11ax – 242 Tones (UNII Band 3) – Ch. 157)

FCC ID: A3LSMX828U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2405140039-13.A3L	Test Dates: 5/23/2024 - 7/28/2024	EUT Type: Portable Tablet	Page 96 of 138

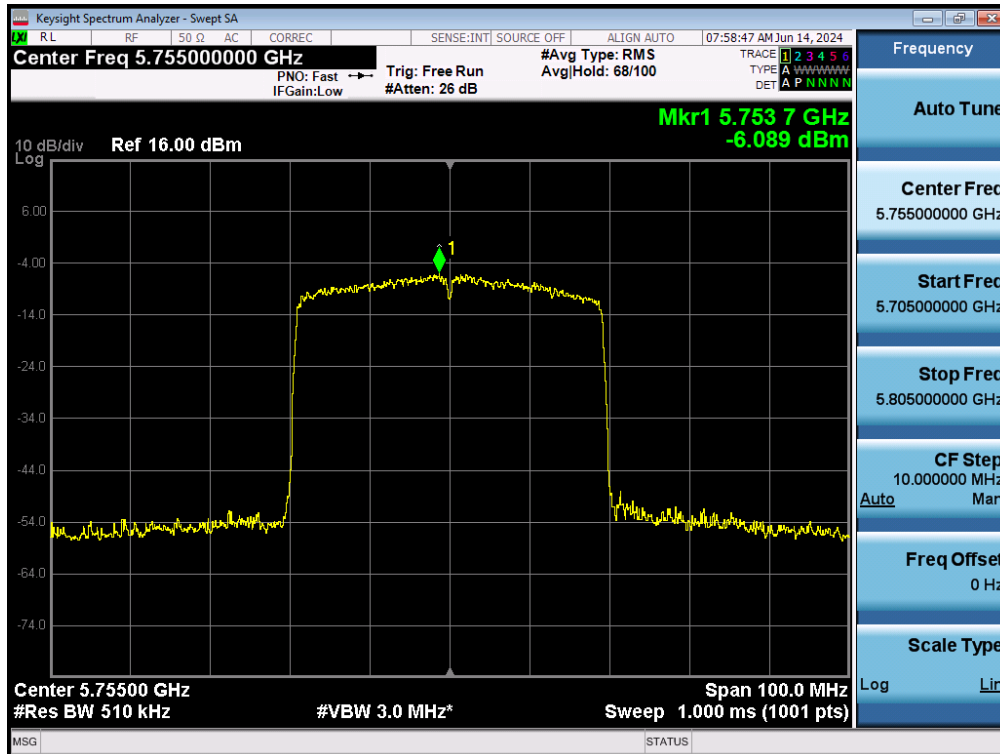


Plot 7-139. Power Spectral Density Plot MIMO ANT2 (40MHz BW 802.11ax – 484 Tones (UNII Band 3) – Ch. 151)

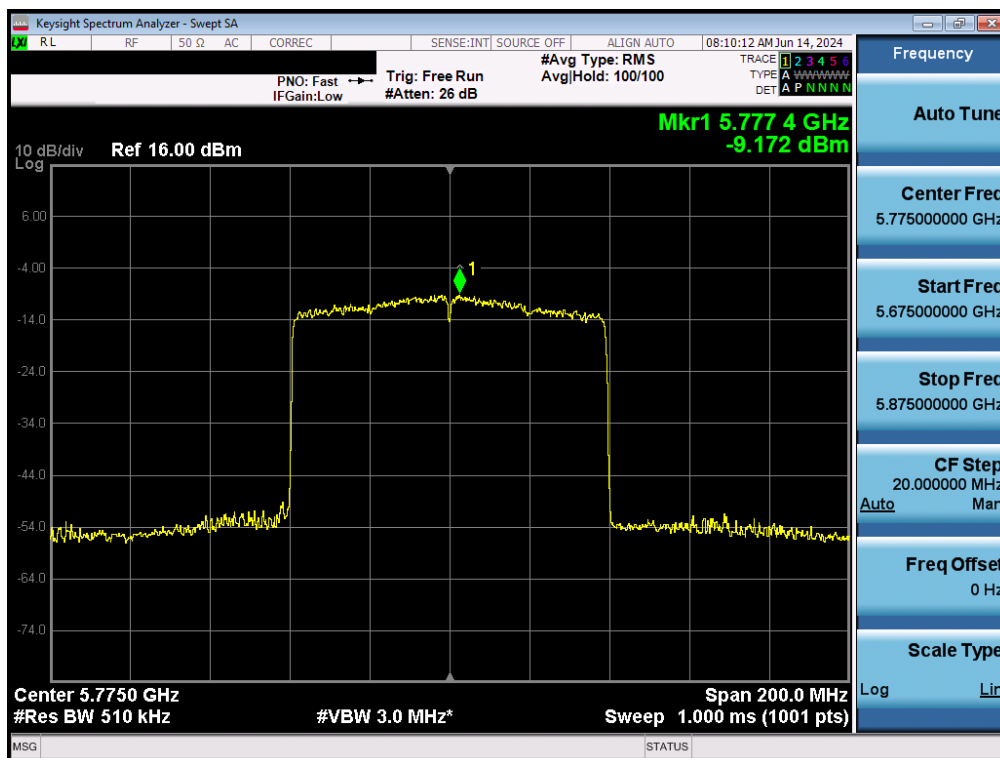


Plot 7-140. Power Spectral Density Plot MIMO ANT2 (80MHz BW 802.11ax – 996 Tones (UNII Band 3) – Ch. 155)

FCC ID: A3LSMX828U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2405140039-13.A3L	Test Dates: 5/23/2024 - 7/28/2024	EUT Type: Portable Tablet	Page 97 of 138

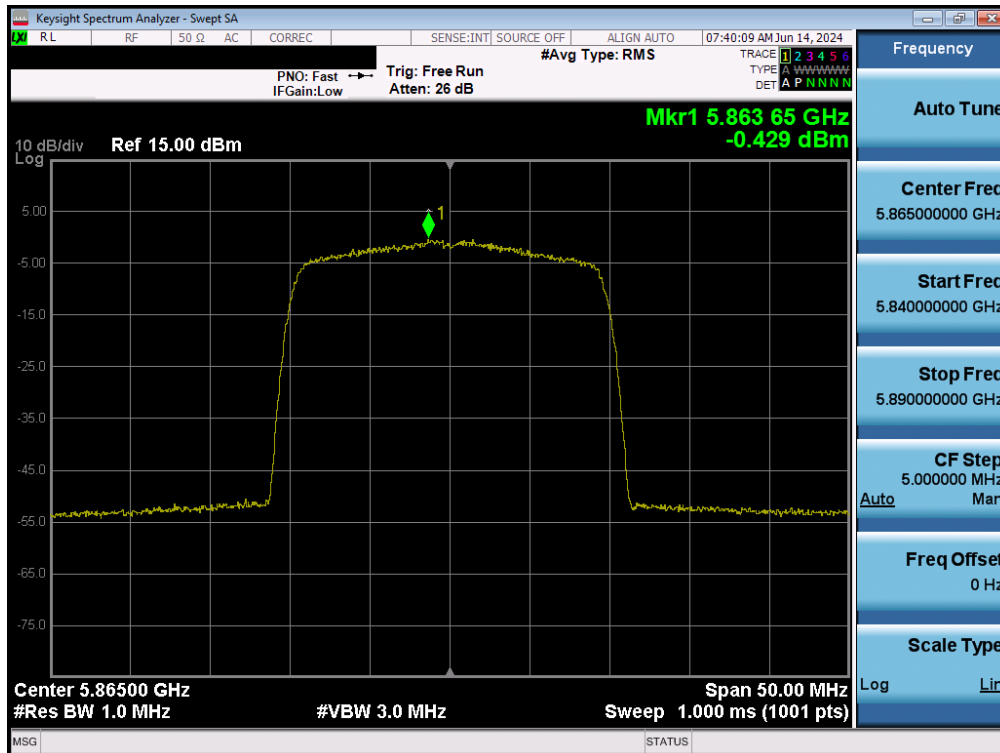


Plot 7-141. Power Spectral Density Plot MIMO ANT2 (20MHz BW 802.11ax – 242 Tones (UNII Band 4) – Ch. 173)

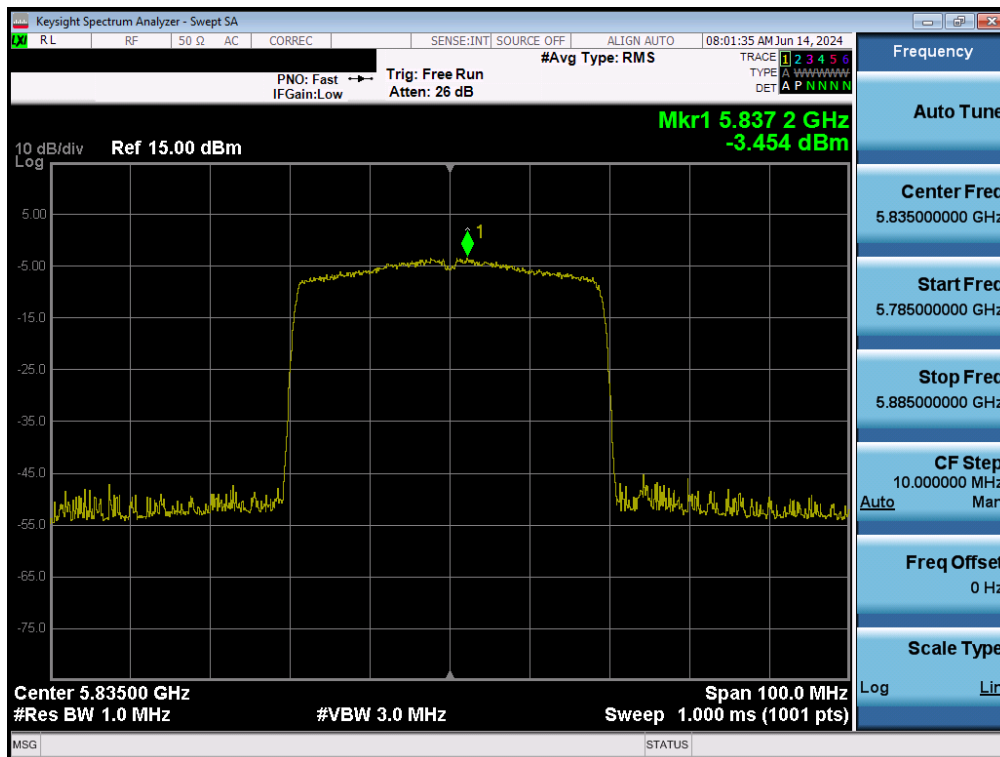


Plot 7-142. Power Spectral Density Plot MIMO ANT2 (40MHz BW 802.11ax – 484 Tones (UNII Band 3/4) – Ch. 167)

FCC ID: A3LSMX828U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2405140039-13.A3L	Test Dates: 5/23/2024 - 7/28/2024	EUT Type: Portable Tablet	Page 98 of 138

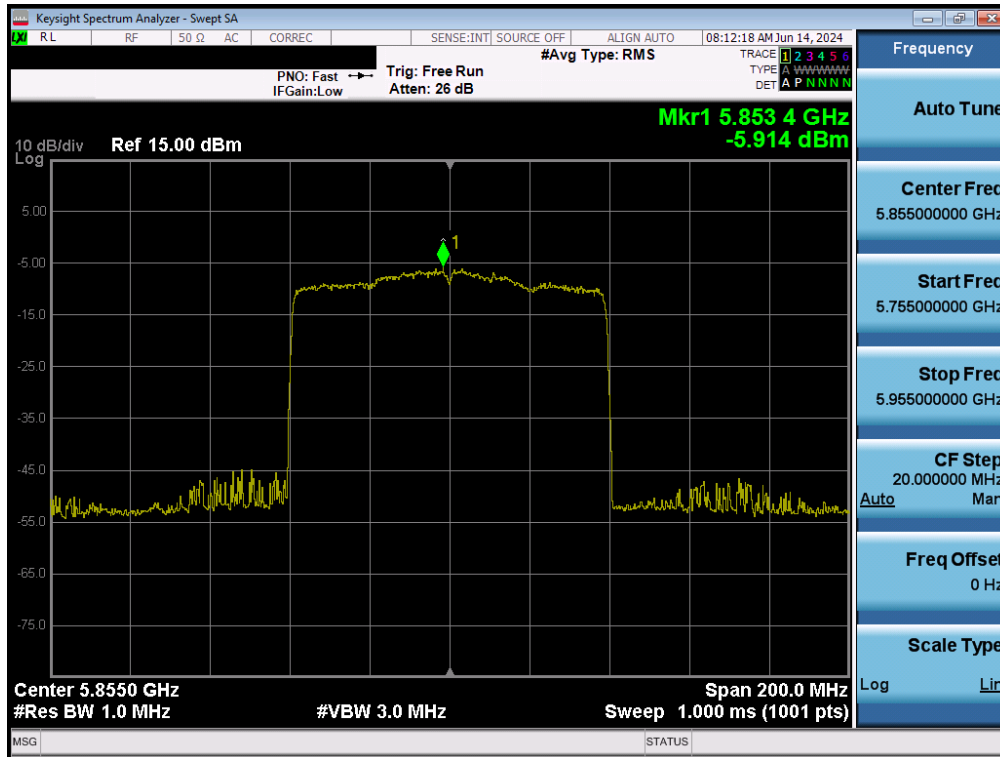

Plot 7-143. Power Spectral Density Plot MIMO ANT2 (80MHz BW 802.11ax – 996 Tones (UNII Band 3/4) – Ch. 171)

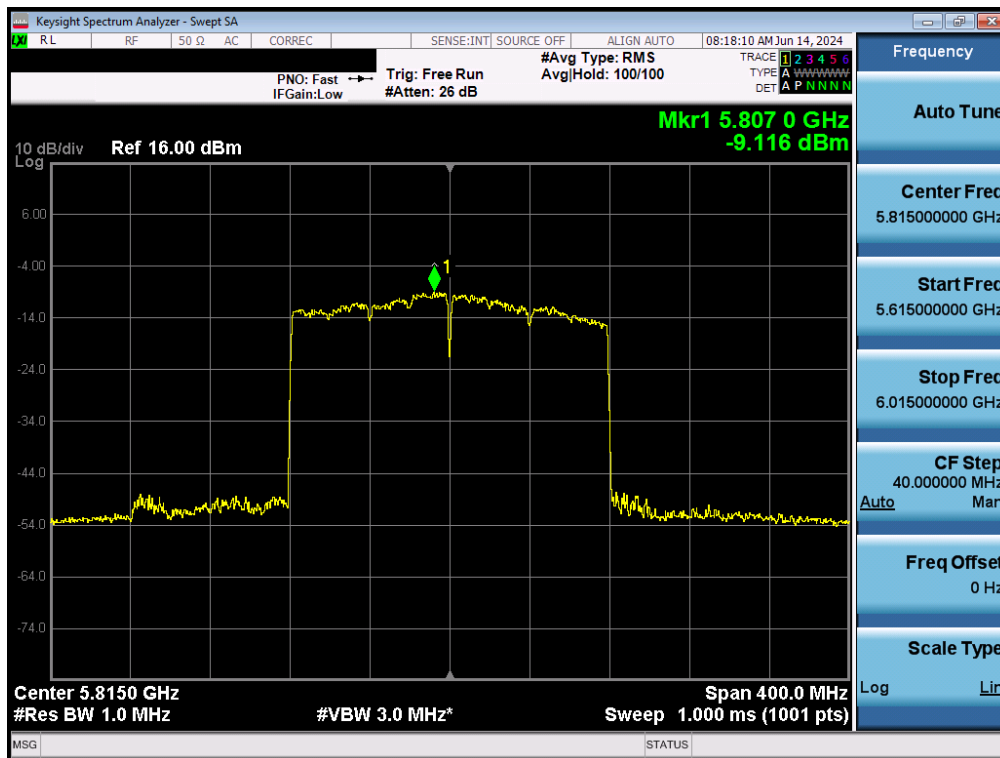

Plot 7-144. Power Spectral Density Plot MIMO ANT2 (160MHz BW 802.11ax – 996\*2 Tones (UNII Band 3/4) – Ch. 163)

FCC ID: A3LSMX828U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2405140039-13.A3L	Test Dates: 5/23/2024 - 7/28/2024	EUT Type: Portable Tablet	Page 99 of 138



**Note:**

Per ANSI C63.10-2013 Section 14.3.2.2 and KDB 662911 v02r01 Section E)2), the power spectral density at Antenna-1 and Antenna-2 were first measured separately with reduced Antenna-1 and Antenna-2 powers per manufacture’s tune-up document. The measured values were then summed in linear power units then converted back to dBm.

**Sample Directional Gain Calculation:**

Assuming the antenna gain is -8.61 dBi for Antenna-1 and -7.68 dBi for Antenna-2.

$$\begin{aligned}
 \text{Directional gain} &= 10 \log[(10^{G_1/20} + 10^{G_2/20} + \dots + 10^{G_N/20})^2 / N_{\text{ANT}}] \text{ dBi} \\
 &= 10 \log[(10^{-8.61/20} + 10^{-7.68/20} / 2] \text{ dBi} \\
 &= (-5.12) \text{ dBi}
 \end{aligned}$$

**Sample MIMO Calculation:**

Assuming the average conducted power spectral density was measured to be 5.88 dBm for Antenna-1 and 6.27 dBm for Antenna-2.

$$\begin{aligned}
 &\text{Antenna-1} + \text{Antenna-2} = \text{MIMO} \\
 (5.88 \text{ dBm} + 6.27 \text{ dBm}) &= (3.87 \text{ mW} + 4.24 \text{ mW}) = 8.11 \text{ mW} = 9.09 \text{ dBm}
 \end{aligned}$$

**Sample e.i.r.p Power Spectral Density Calculation:**

Assuming the average MIMO power density was calculated to be 9.09 dBm with directional gain of -5.12 dBi.

$$\begin{aligned}
 \text{e.i.r.p. Power Spectral Density(dBm)} &= \text{Power Spectral Density (dBm)} + \text{directional gain (dBi)} \\
 9.09 \text{ dBm} + (-5.12) \text{ dBi} &= 3.97 \text{ dBm}
 \end{aligned}$$

FCC ID: A3LSMX828U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2405140039-13.A3L	Test Dates: 5/23/2024 - 7/28/2024	EUT Type: Portable Tablet	Page 100 of 138

## 7.6 Radiated Emission Measurements

### Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, and at the appropriate frequencies. All channels, modes, and modulations/data rates were investigated among all UNII bands. Only the radiated emissions of the configuration that produced the worst-case emissions are reported in this section.

**For transmitters operating in the 5.15-5.25 GHz and 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz.**

**For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an EIRP of -27 dBm/MHz.**

**For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.**

**For transmitters operating in the 5.850 – 5.895 GHz band: all emissions at or above 5.895GHz shall not exceed an e.i.r.p. of -5dBm/MHz and shall decrease linearly up to an e.i.r.p. of -27dBm/MHz at or above 5.925GHz, and all emissions below 5.725 GHz shall not exceed an e.i.r.p. of -27dBm/MHz at 5.65 GHz increasing linearly to 10dBm/MHz at 5.7GHz and from 5.7GHz increasing linearly to a level of 15.6dBm/MHz at 5.72GHz, and from 5.72GHz increasing linearly to a level of 27dBm/MHz at 5.725GHz.**

**All out of band emissions appearing in a restricted band as specified in FCC §15.205 of the Title 47 CFR and Table 6 of RSS-Gen (8.10) must not exceed the limits shown in the table below per FCC §15.209 and RSS-Gen (8.9).**

Frequency	Field Strength [ $\mu$ V/m]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400\F (kHz)	300
0.490 – 1.705 MHz	24000\F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

**Table 7-21. Radiated Limits**

### Test Procedures Used

ANSI C63.10-2013 – Sections 12.7.7.2, 12.7.6, 12.7.5 (Radiated Spurious Emissions)

ANSI C63.10-2013 – Section 12.7.4.4 (Band Edge Measurements)

FCC ID: A3LSMX828U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2405140039-13.A3L	Test Dates: 5/23/2024 - 7/28/2024	EUT Type: Portable Tablet	Page 101 of 138

**Test Settings – Above 1GHz**

**Average Field Strength Measurements (Method AD – Average Detection)**

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest.
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = power average (RMS)
5. Number of measurement points = 1001 (Number of points must be  $\geq 2 \times \text{span} \backslash \backslash \text{RBW}$ )
6. Sweep time = auto
7. Trace (RMS) averaging was performed over at least 100 traces.

**Peak Field Strength Measurements**

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest.
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize.

**Test Settings – Below 1GHz**

**Quasi-Peak Field Strength Measurements**


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest.
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize.

**Test Setup**


The EUT and measurement equipment were set up as shown in the diagram below.

FCC ID: A3LSMX828U	<b>MEASUREMENT REPORT</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2405140039-13.A3L	<b>Test Dates:</b> 5/23/2024 - 7/28/2024	<b>EUT Type:</b> Portable Tablet	Page 102 of 138



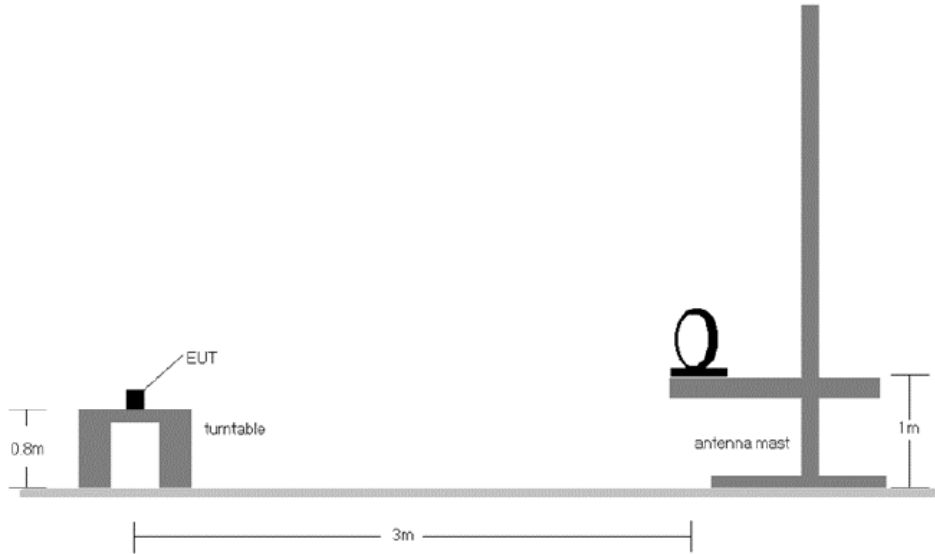


**Figure 7-5. Radiated Test Setup < 30MHz**

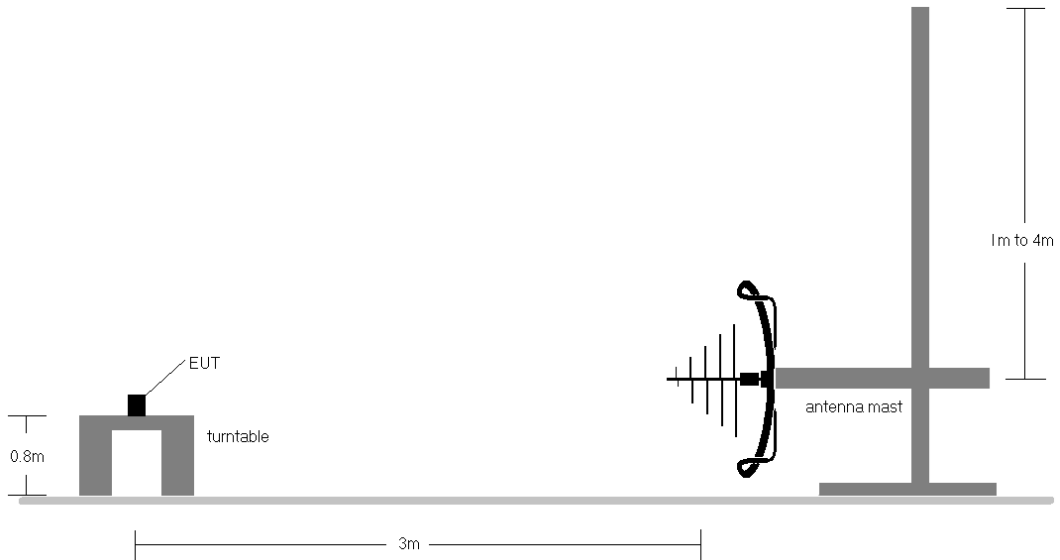

**Figure 7-6. Radiated Test Setup < 1GHz**

FCC ID: A3LSMX828U	<b>MEASUREMENT REPORT</b>		<b>Approved by:</b> Technical Manager
Test Report S/N: 1M2405140039-13.A3L	Test Dates: 5/23/2024 - 7/28/2024	EUT Type: Portable Tablet	Page 103 of 138

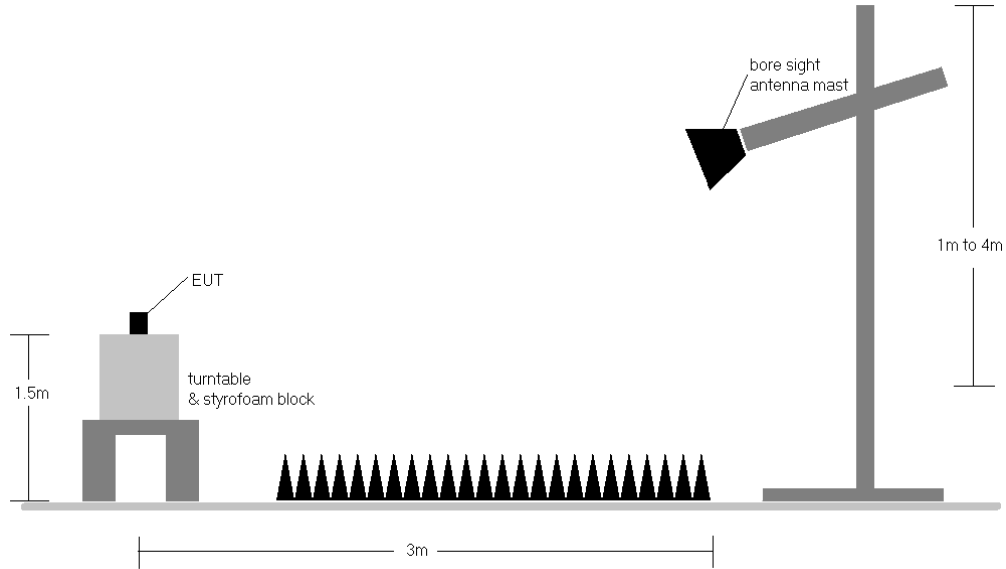

**Figure 7-7. Radiated Test Setup > 1GHz**

<b>FCC ID:</b> A3LSMX828U	<b>MEASUREMENT REPORT</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2405140039-13.A3L	<b>Test Dates:</b> 5/23/2024 - 7/28/2024	<b>EUT Type:</b> Portable Tablet	Page 104 of 138

**Test Notes**

1. All spurious emissions lying in restricted bands specified in §15.205 are below the limit shown in §15.209. All spurious emissions that do not lie in a restricted band are subject to an average limit of -27dBm/MHz. At 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions of 68.2dB $\mu$ V/m.
2. All spurious emissions that do not lie in a restricted band are subject to a peak limit not to exceed 20dB of the average limit [68.2dB $\mu$ V/m]. If a peak measurement passes the average limit, it was determined no further investigation is necessary.
3. The antenna is manipulated through typical positions, polarity, and length during the tests. The EUT is manipulated through three orthogonal planes.
4. This unit was tested with its standard battery.
5. The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. Above 1 GHz, average and peak measurements were taken using linearly polarized horn antennas. The worst-case emissions are reported, however emissions whose levels were not within 20dB of the respective limits were not reported.
6. Emissions below 18GHz were measured at a 3-meter test distance while emissions above 18GHz were measured at a 1-meter test distance with the application of a distance correction factor.
7. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. Any emissions found to be within 20dB of the limit are fully investigated and the results are shown in this section.
8. The "-" shown in the following RSE tables are used to denote a noise floor measurement.
9. In the case where a peak-detector measurement passed the given RMS limit it was determined sufficient to demonstrate compliance.
10. The results recorded using the broadband antenna are known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
11. For radiated measurements, emissions were investigated for the fully-loaded RU configuration and for all of the partially-loaded RU configurations. Among all of the available partially-loaded RU configurations, only the configuration with the worst case emissions is reported.

**Sample Calculations**

**Determining Spurious Emissions Levels**

- Field Strength Level [dB $\mu$ V/m] = Analyzer Level [dBm] + 107 + AFCL [dB/m]
- AFCL [dB/m] = Antenna Factor [dB/m] + Cable Loss [dB]
- Margin [dB] = Field Strength Level [dB $\mu$ V/m] – Limit [dB $\mu$ V/m]

**Radiated Band Edge Measurement Offset**


FCC ID: A3LSMX828U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2405140039-13.A3L	Test Dates: 5/23/2024 - 7/28/2024	EUT Type: Portable Tablet	Page 105 of 138

- The amplitude offset shown in the radiated restricted band edge plots in Section Radiated Spurious Emission Measurements – Above 1GHz was calculated using the formula:  


$$\text{Offset (dB)} = (\text{Antenna Factor} + \text{Cable Loss} + \text{Attenuator}) - \text{Preamplifier Gain}$$

<b>FCC ID:</b> A3LSMX828U	<b>MEASUREMENT REPORT</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2405140039-13.A3L	<b>Test Dates:</b> 5/23/2024 - 7/28/2024	<b>EUT Type:</b> Portable Tablet	Page 106 of 138


### 7.6.1 MIMO Radiated Spurious Emission Measurements (26 Tones)

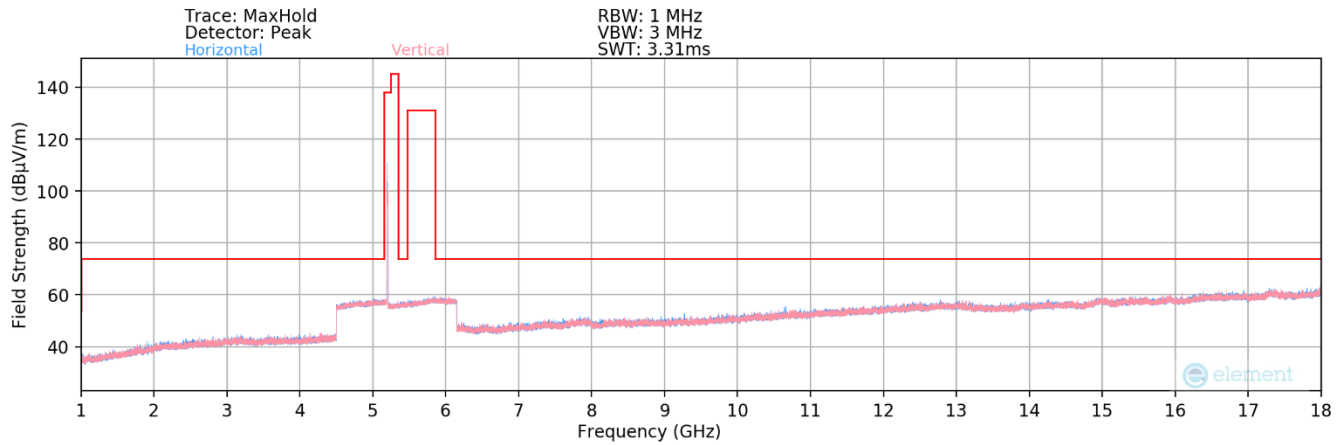

**Plot 7-145. Radiated Spurious Plot above 1GHz MIMO (802.11ax – UNII 1 Ch. 40)**

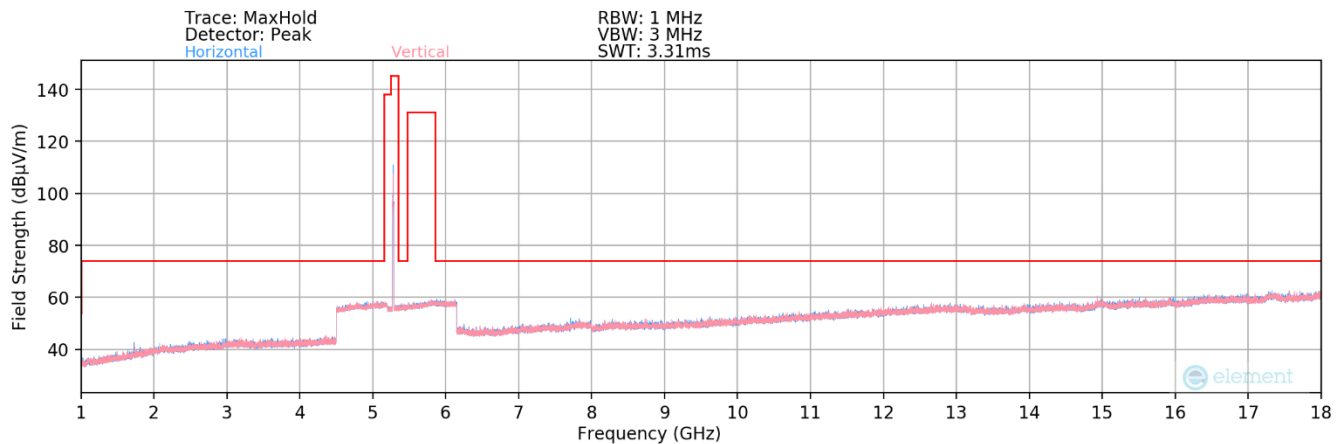


**Plot 7-146. Radiated Spurious Plot above 1GHz MIMO (802.11ax – UNII 2A Ch. 56)**

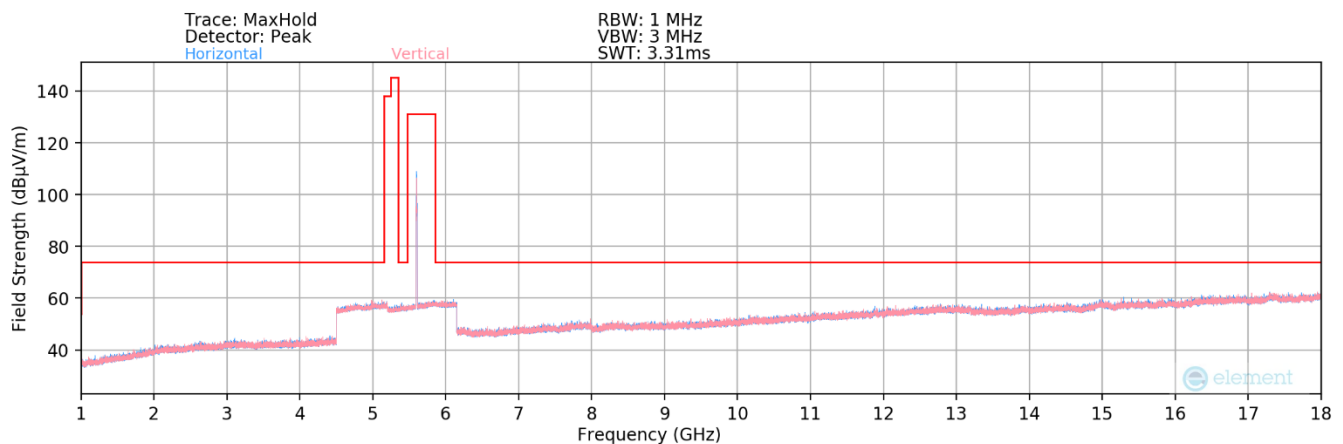


**Plot 7-147. Radiated Spurious Plot above 1GHz MIMO (802.11ax – UNII 2C Ch. 120)**


<b>FCC ID:</b> A3LSMX828U	<b>MEASUREMENT REPORT</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2405140039-13.A3L	<b>Test Dates:</b> 5/23/2024 - 7/28/2024	<b>EUT Type:</b> Portable Tablet	Page 107 of 138

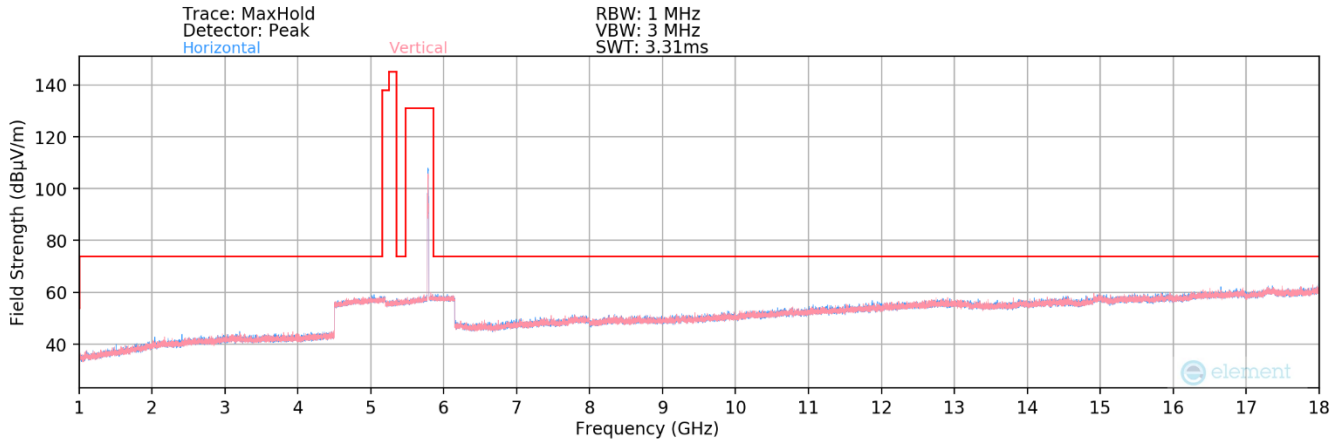

**Plot 7-148. Radiated Spurious Plot above 1GHz MIMO (802.11ax – UNII 3 Ch. 157)**

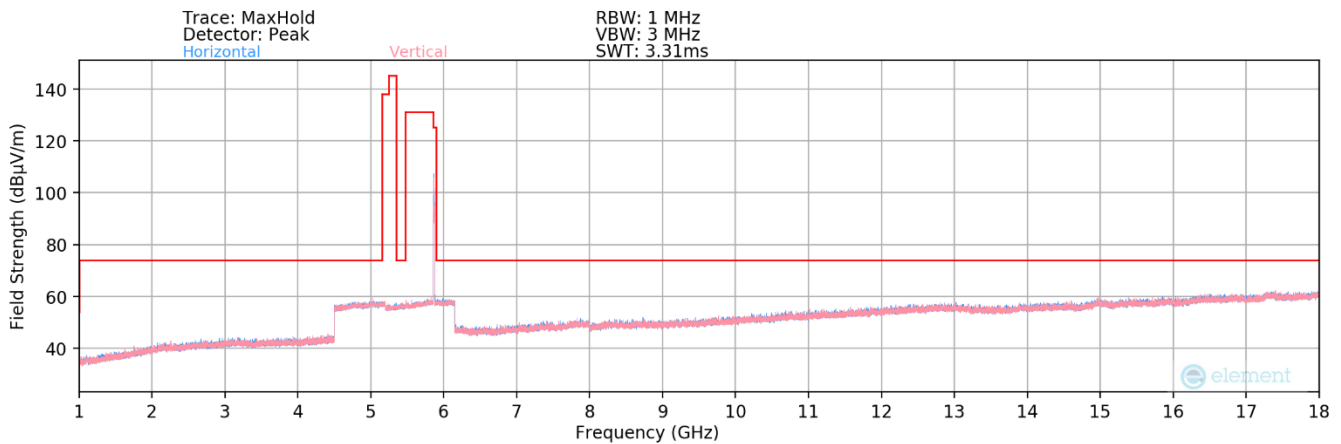


**Plot 7-149. Radiated Spurious Plot above 1GHz MIMO (802.11ax – UNII 4 Ch. 173)**

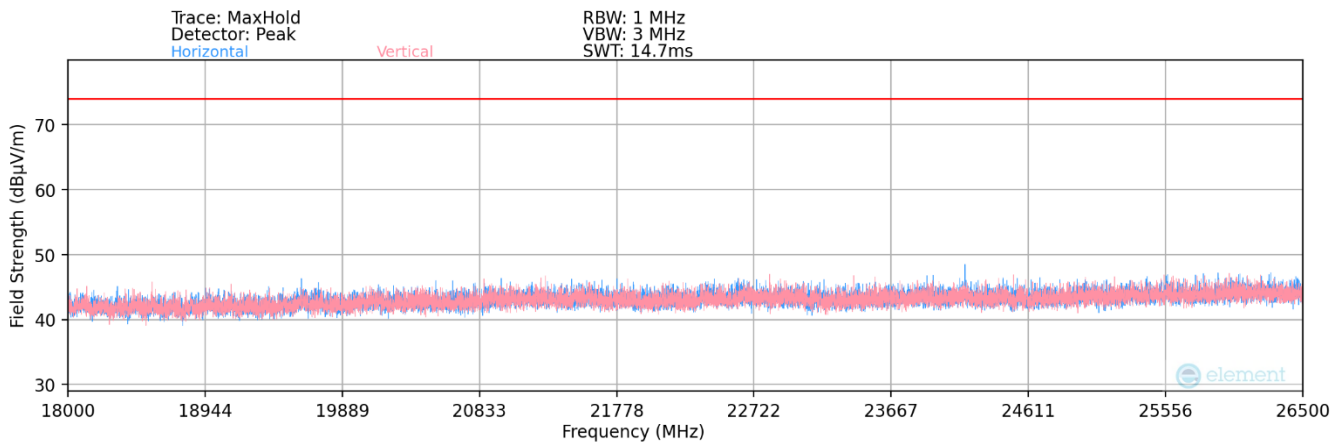

**Plot 7-150. Radiated Spurious Plot 18GHz - 26.5GHz (802.11ax)**

<b>FCC ID:</b> A3LSMX828U	<b>MEASUREMENT REPORT</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2405140039-13.A3L	<b>Test Dates:</b> 5/23/2024 - 7/28/2024	<b>EUT Type:</b> Portable Tablet	Page 108 of 138

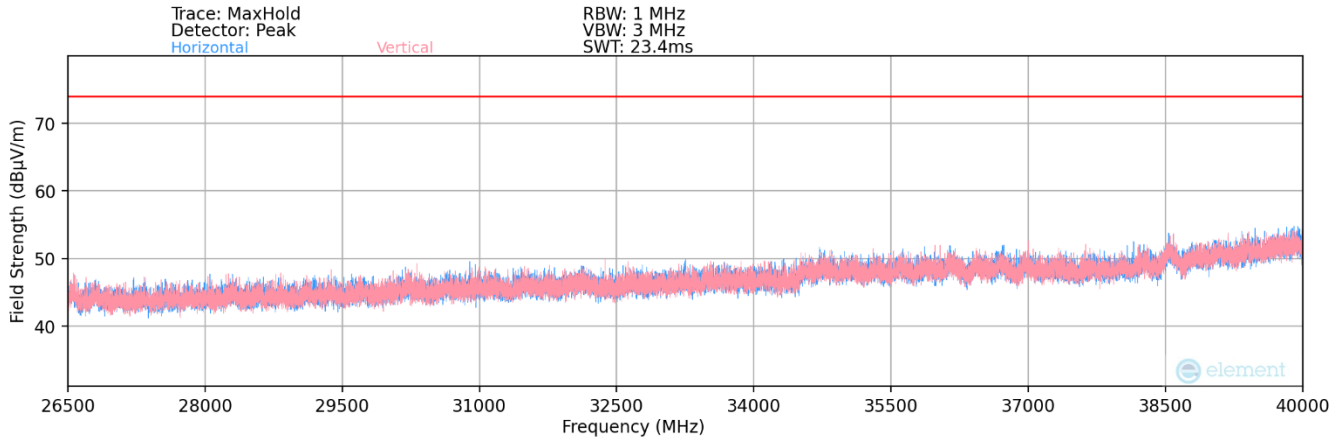

**Plot 7-151. Radiated Spurious Plot 26.5GHz - 40GHz (802.11ax)**

FCC ID: A3LSMX828U	<b>MEASUREMENT REPORT</b>		<b>Approved by:</b> Technical Manager
Test Report S/N: 1M2405140039-13.A3L	Test Dates: 5/23/2024 - 7/28/2024	EUT Type: Portable Tablet	Page 109 of 138



**MIMO Radiated Spurious Emission Measurements (26 Tones) – UNII 1**

Worst Case Mode: 802.11ax (20MHz BW)  
 Worst Case Transfer Rate: MCS0  
 Distance of Measurements: 1 & 3 Meters

Mode	Antenna	UNII Band	Channel	Test Channel Freq. [MHz]	RU Index	Restricted	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
802.11ax RU 26T	MIMO	1	36	5180	4		10360.00	Peak	V	-	-	-69.99	16.03	0.00	53.04	68.20	-15.16
						*	15540.00	Average	V	-	-	-82.39	23.04	0.00	47.65	53.98	-6.33
						*	15540.00	Peak	V	-	-	-70.42	23.04	0.00	59.62	73.98	-14.36
						*	20720.00	Average	V	-	-	-63.36	3.16	-9.54	37.25	53.98	-16.73
						*	20720.00	Peak	V	-	-	-56.44	3.16	-9.54	44.18	73.98	-29.80
							25900.00	Peak	V	-	-	-56.17	4.24	-9.54	45.53	68.20	-22.67
				10400.00	Peak	V	-	-	-69.72	16.25	0.00	53.53	68.20	-14.67			
			*	15600.00	Average	V	-	-	-81.81	23.40	0.00	48.59	53.98	-5.39			
			*	15600.00	Peak	V	-	-	-70.59	23.40	0.00	59.81	73.98	-14.17			
			*	20800.00	Average	V	-	-	-65.41	3.15	-9.54	35.20	53.98	-18.78			
			*	20800.00	Peak	V	-	-	-55.13	3.15	-9.54	45.48	73.98	-28.50			
				26000.00	Peak	V	-	-	-55.82	4.16	-9.54	45.80	68.20	-22.40			
				10480.00	Peak	V	-	-	-70.06	16.26	0.00	53.20	68.20	-15.00			
			*	15720.00	Average	V	-	-	-82.39	23.33	-9.54	38.40	53.98	-15.58			
			*	15720.00	Peak	V	-	-	-71.19	23.33	-9.54	49.60	73.98	-24.38			
				20960.00	Peak	V	-	-	-56.39	3.27	-9.54	44.35	68.20	-23.85			
				26200.00	Peak	V	-	-	-55.17	3.96	-9.54	46.25	68.20	-21.95			

**Table 7-22. Radiated Measurements MIMO (26 Tones)**

<b>FCC ID:</b> A3LSMX828U	<b>MEASUREMENT REPORT</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2405140039-13.A3L	<b>Test Dates:</b> 5/23/2024 - 7/28/2024	<b>EUT Type:</b> Portable Tablet	Page 110 of 138





**MIMO Radiated Spurious Emission Measurements (26 Tones) – UNII 2A**

Worst Case Mode: 802.11ax (20MHz BW)  
 Worst Case Transfer Rate: MCS0  
 Distance of Measurements: 1 & 3 Meters

Mode	Antenna	UNII Band	Channel	Test Channel Freq. [MHz]	RU Index	Restricted	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
802.11ax RU 26T	MIMO	2A	52	5260	4		10520.00	Peak	V	-	-	-69.73	16.33	0.00	53.60	68.20	-14.60
						*	15780.00	Average	V	-	-	-82.19	23.33	0.00	48.14	53.98	-5.84
						*	15780.00	Peak	V	-	-	-71.27	23.33	0.00	59.06	73.98	-14.92
						*	21040.00	Average	V	-	-	-64.72	3.35	-9.54	36.09	53.98	-17.89
						*	21040.00	Peak	V	-	-	-56.06	3.35	-9.54	44.75	73.98	-29.23
							26300.00	Peak	V	-	-	-56.75	3.91	-9.54	44.62	68.20	-23.58
				10560.00	Peak	V	-	-	-70.19	16.58	0.00	53.39	68.20	-14.81			
			*	15840.00	Average	V	-	-	-82.16	23.62	0.00	48.46	53.98	-5.52			
			*	15840.00	Peak	V	-	-	-71.03	23.62	0.00	59.59	73.98	-14.39			
			*	21120.00	Average	V	-	-	-56.32	3.46	-9.54	44.60	53.98	-9.38			
			*	21120.00	Peak	V	-	-	-63.85	3.46	-9.54	37.07	73.98	-36.91			
				26400.00	Peak	V	-	-	-55.80	3.71	-9.54	45.37	68.20	-22.83			
			*	10640.00	Average	V	-	-	-81.72	16.85	0.00	42.13	53.98	-11.84			
			*	10640.00	Peak	V	-	-	-70.53	16.85	0.00	53.32	73.98	-20.66			
			*	15960.00	Average	V	-	-	-82.19	24.02	0.00	48.83	53.98	-5.15			
			*	15960.00	Peak	V	-	-	-70.58	24.02	0.00	60.44	73.98	-13.54			
			*	21280.00	Average	V	-	-	-64.77	3.58	-9.54	36.28	53.98	-17.70			
			*	21280.00	Peak	V	-	-	-56.10	3.58	-9.54	44.95	73.98	-29.03			
				26600.00	Peak	V	-	-	-55.77	3.91	-9.54	45.60	68.20	-22.60			

**Table 7-23. Radiated Measurements MIMO (26 Tones)**

<b>FCC ID:</b> A3LSMX828U	<b>MEASUREMENT REPORT</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2405140039-13.A3L	<b>Test Dates:</b> 5/23/2024 - 7/28/2024	<b>EUT Type:</b> Portable Tablet	Page 111 of 138



**MIMO Radiated Spurious Emission Measurements (26 Tones) – UNII 2C**

Worst Case Mode: 802.11ax (20MHz BW)  
 Worst Case Transfer Rate: MCS0  
 Distance of Measurements: 1 & 3 Meters

Mode	Antenna	UNII Band	Channel	Test Channel Freq. [MHz]	RU Index	Restricted	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
802.11ax RU 26T	MIMO	2C	100	5500	4	*	11000.00	Average	V	-	-	-81.79	17.49	0.00	42.70	53.98	-11.28
						*	11000.00	Peak	V	-	-	-70.04	17.49	-9.54	44.91	73.98	-29.07
						*	16500.00	Peak	V	-	-	-71.15	25.00	-9.54	51.31	68.20	-16.89
						*	22000.00	Peak	V	-	-	-55.84	3.53	-9.54	45.15	68.20	-23.05
						*	27500.00	Peak	V	-	-	-56.57	3.97	-9.54	44.86	68.20	-23.34
						*	11200.00	Average	V	-	-	-81.12	17.61	0.00	43.49	53.98	-10.49
			120	5600	4	*	11200.00	Peak	V	-	-	-69.39	17.61	0.00	55.22	73.98	-18.76
						*	16800.00	Peak	V	-	-	-71.13	24.98	0.00	60.85	68.20	-7.35
						*	22400.00	Average	V	-	-	-64.18	3.58	-9.54	36.86	53.98	-17.12
						*	22400.00	Peak	V	-	-	-54.71	3.58	-9.54	46.32	73.98	-27.66
						*	28000.00	Peak	V	-	-	-57.31	4.52	-9.54	44.67	68.20	-23.53
						*	11440.00	Average	V	-	-	-81.68	18.15	0.00	43.47	53.98	-10.51
			144	5720	4	*	11440.00	Peak	V	-	-	-69.94	18.15	0.00	55.21	73.98	-18.77
						*	17160.00	Peak	V	-	-	-71.25	25.10	0.00	60.85	68.20	-7.35
						*	22880.00	Average	V	-	-	-63.18	3.76	-9.54	38.03	53.98	-15.95
						*	22880.00	Peak	V	-	-	-56.33	3.76	-9.54	44.88	73.98	-29.10
						*	28600.00	Peak	V	-	-	-57.43	4.96	-9.54	44.99	68.20	-23.21
						*	11440.00	Average	V	-	-	-81.68	18.15	0.00	43.47	53.98	-10.51

**Table 7-24. Radiated Measurements MIMO (26 Tones)**

<b>FCC ID:</b> A3LSMX828U	<b>MEASUREMENT REPORT</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2405140039-13.A3L	<b>Test Dates:</b> 5/23/2024 - 7/28/2024	<b>EUT Type:</b> Portable Tablet	Page 112 of 138



**MIMO Radiated Spurious Emission Measurements (26 Tones) – UNII 3**

Worst Case Mode: 802.11ax (20MHz BW)  
 Worst Case Transfer Rate: MCS0  
 Distance of Measurements: 1 & 3 Meters

Mode	Antenna	UNII Band	Channel	Test Channel Freq. [MHz]	RU Index	Restricted	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
802.11ax RU 26T	MIMO	3	149	5745	4	*	11490.00	Average	V	-	-	-81.89	18.28	0.00	43.39	53.98	-10.59
						*	11490.00	Peak	V	-	-	-70.41	18.28	0.00	54.87	73.98	-19.11
							17235.00	Peak	V	-	-	-70.52	25.51	0.00	61.99	68.20	-6.21
						*	22980.00	Average	V	-	-	-64.55	3.66	-9.54	36.57	53.98	-17.41
						*	22980.00	Peak	V	-	-	-56.93	3.66	-9.54	44.19	73.98	-29.79
							28725.00	Peak	V	-	-	-56.15	5.05	-9.54	46.36	68.20	-21.84
				11570.00	Average	V	-	-	-81.56	18.16	0.00	43.60	53.98	-10.38			
			*	11570.00	Peak	V	-	-	-70.04	18.16	0.00	55.12	73.98	-18.86			
				17355.00	Peak	V	-	-	-71.44	26.74	0.00	62.30	68.20	-5.90			
				23140.00	Peak	V	-	-	-55.38	3.65	-9.54	45.73	68.20	-22.47			
				28925.00	Peak	V	-	-	-55.44	4.92	-9.54	46.94	68.20	-21.26			
				11650.00	Average	V	-	-	-81.34	18.25	0.00	43.91	53.98	-10.07			
			*	11650.00	Peak	V	-	-	-70.62	18.25	0.00	54.63	73.98	-19.35			
				17475.00	Peak	V	-	-	-70.98	26.50	0.00	62.52	68.20	-5.68			
				23300.00	Peak	V	-	-	-54.99	3.55	-9.54	46.02	68.20	-22.18			
				29125.00	Peak	V	-	-	-55.10	5.01	-9.54	47.37	68.20	-20.83			

**Table 7-25. Radiated Measurements MIMO (26 Tones)**

<b>FCC ID:</b> A3LSMX828U	<b>MEASUREMENT REPORT</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2405140039-13.A3L	<b>Test Dates:</b> 5/23/2024 - 7/28/2024	<b>EUT Type:</b> Portable Tablet	Page 113 of 138



**MIMO Radiated Spurious Emission Measurements (26 Tones) – UNII 4**


Worst Case Mode: 802.11ax (20MHz BW)  
 Worst Case Transfer Rate: MCS0  
 Distance of Measurements: 1 & 3 Meters

Mode	Antenna	UNII Band	Channel	Test Channel Freq. [MHz]	RU Index	Restricted	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]		
802.11ax RU 26T	ANT1	4	169	5845	4	*	11690.00	Average	V	-	-	-81.56	18.65	0.00	44.09	53.98	-9.89		
						*	11690.00	Peak	V	-	-	-70.22	18.65	0.00	55.43	73.98	-18.55		
							17535.00	Peak	V	-	-	-71.69	26.34	0.00	61.65	68.20	-6.55		
							23380.00	Peak	V	-	-	-55.29	3.53	-9.54	45.70	68.20	-22.50		
							29225.00	Peak	V	-	-	-55.73	5.04	-9.54	46.77	68.20	-21.43		
							35070.00	Peak	V	-	-	-55.00	7.60	-9.54	50.06	68.20	-18.14		
				173	5865	4	*	11730.00	Average	V	-	-	-	-81.51	18.20	0.00	43.69	53.98	-10.29
			*				11730.00	Peak	V	-	-	-69.71	18.20	0.00	55.49	73.98	-18.49		
							17595.00	Peak	V	-	-	-71.15	26.29	0.00	62.14	68.20	-6.06		
							23460.00	Peak	V	-	-	-54.95	3.57	-9.54	46.08	68.20	-22.12		
							29325.00	Peak	V	-	-	-55.90	5.14	-9.54	46.70	68.20	-21.50		
							35190.00	Peak	V	-	-	-55.51	7.80	-9.54	49.75	68.20	-18.45		
				177	5885	4	*	11770.00	Average	V	-	-	-	-81.44	18.48	0.00	44.04	53.98	-9.94
			*				11770.00	Peak	V	-	-	-70.38	18.48	0.00	55.10	73.98	-18.88		
							17655.00	Peak	V	-	-	-71.01	26.16	0.00	62.15	68.20	-6.05		
							23540.00	Peak	V	-	-	-55.48	3.57	-9.54	45.55	68.20	-22.65		
							29425.00	Peak	V	-	-	-55.37	5.13	-9.54	47.22	68.20	-20.98		
							35310.00	Peak	V	-	-	-55.84	7.91	-9.54	49.53	68.20	-18.67		


**Table 7-26. Radiated Measurements MIMO (26 Tones)**

<b>FCC ID:</b> A3LSMX828U	<b>MEASUREMENT REPORT</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2405140039-13.A3L	<b>Test Dates:</b> 5/23/2024 - 7/28/2024	<b>EUT Type:</b> Portable Tablet	Page 114 of 138


## 7.6.2 MIMO Radiated Spurious Emission Measurements (242 Tones)

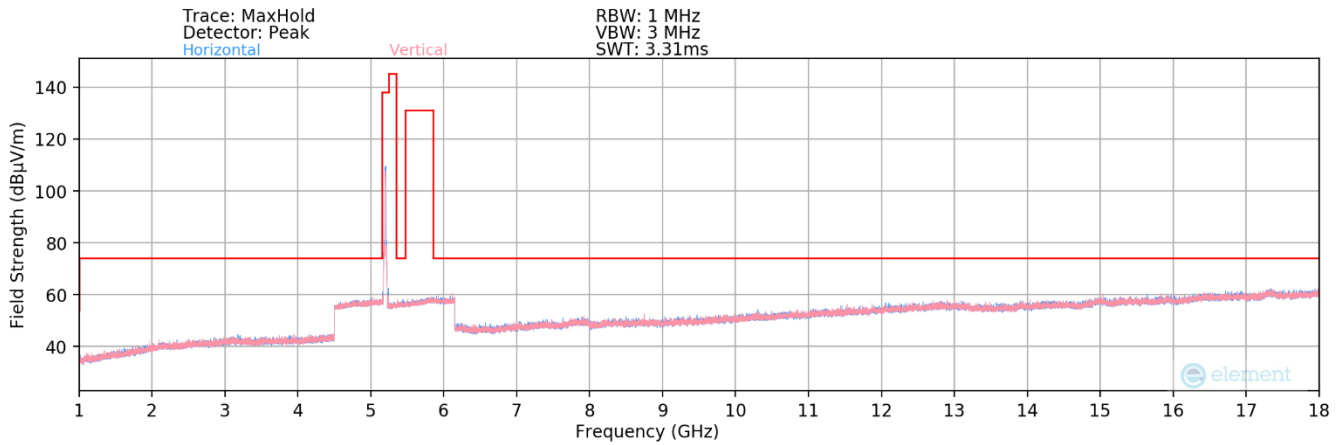

**Plot 7-152. Radiated Spurious Plot above 1GHz MIMO (802.11ax – UNII 1 Ch. 40)**

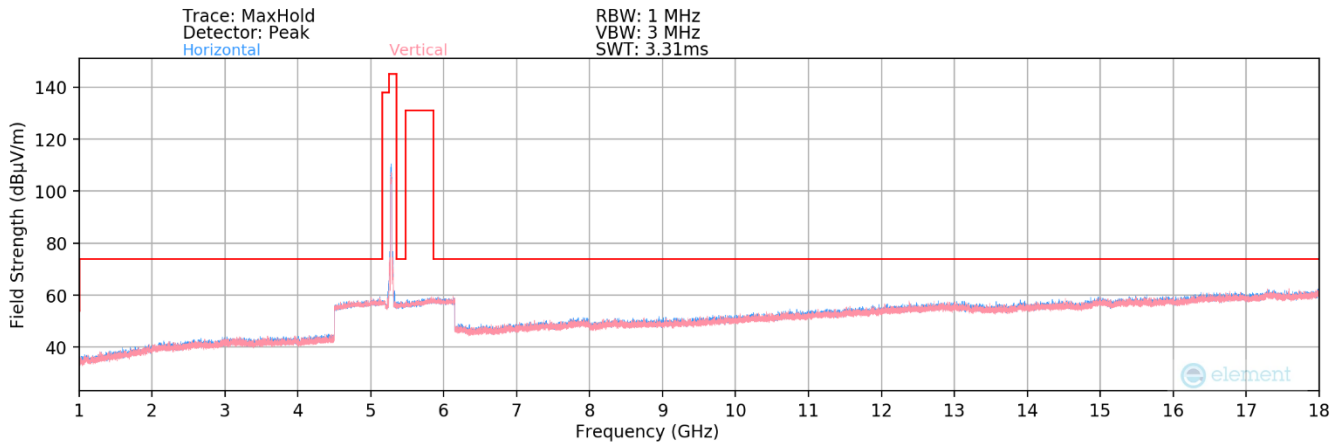


**Plot 7-153. Radiated Spurious Plot above 1GHz MIMO (802.11ax – UNII 2A Ch. 56)**

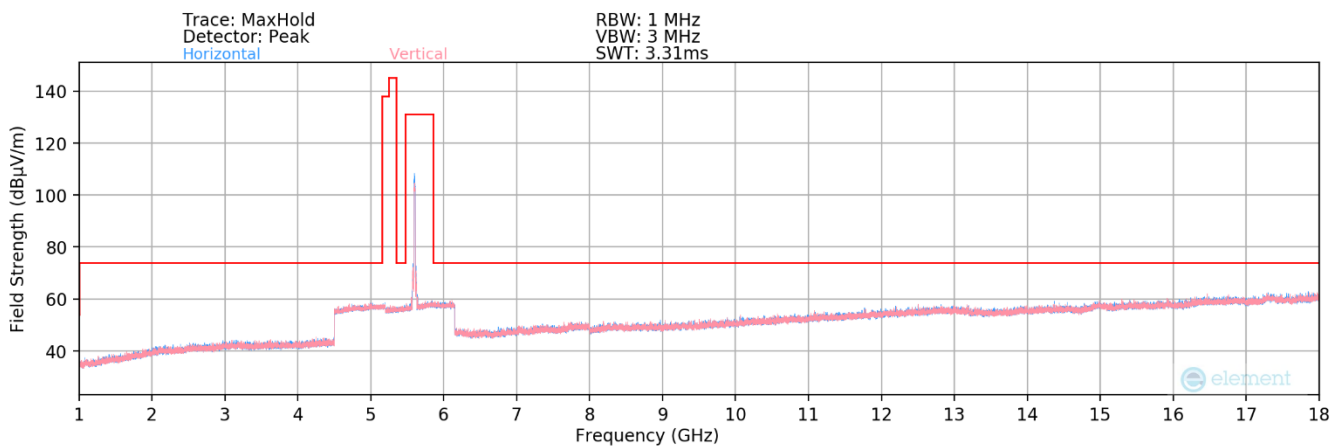


**Plot 7-154. Radiated Spurious Plot above 1GHz MIMO (802.11ax – UNII 2C Ch. 120)**


FCC ID: A3LSMX828U	<b>MEASUREMENT REPORT</b>		Approved by: Technical Manager
Test Report S/N: 1M2405140039-13.A3L	Test Dates: 5/23/2024 - 7/28/2024	EUT Type: Portable Tablet	Page 115 of 138

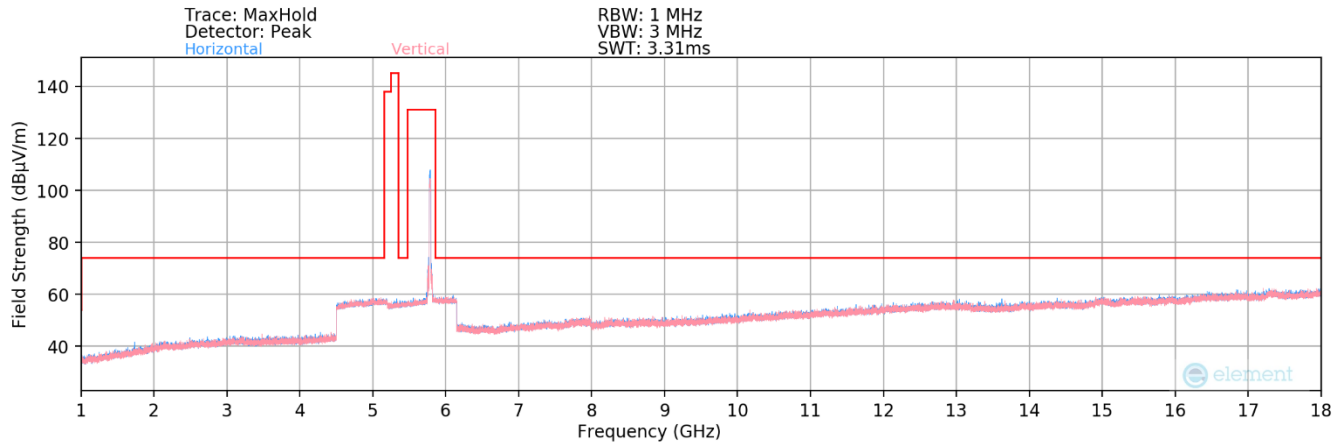

**Plot 7-155. Radiated Spurious Plot above 1GHz MIMO (802.11ax – UNII 3 Ch. 157)**

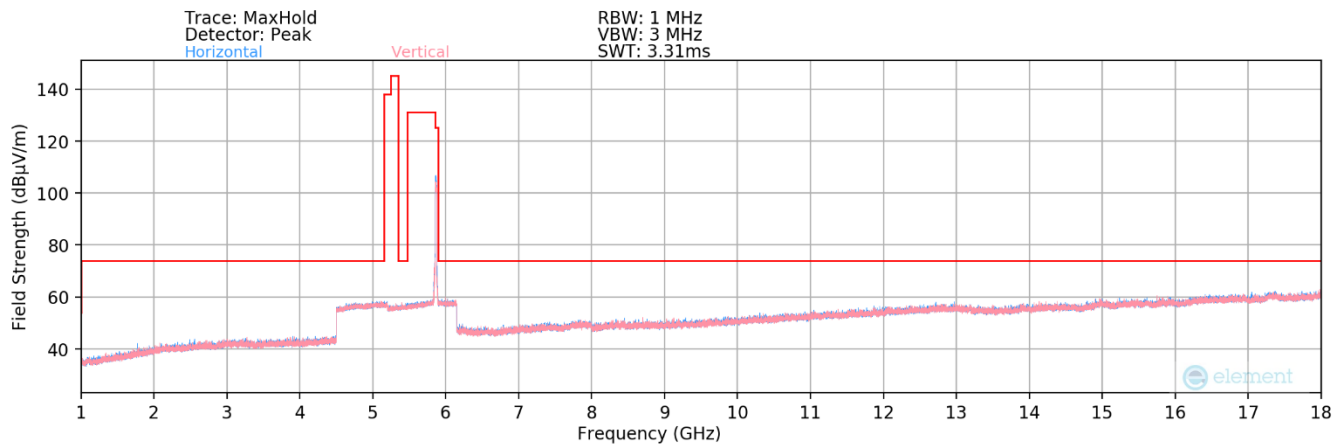


**Plot 7-156. Radiated Spurious Plot above 1GHz MIMO (802.11ax – UNII 4 Ch. 173)**

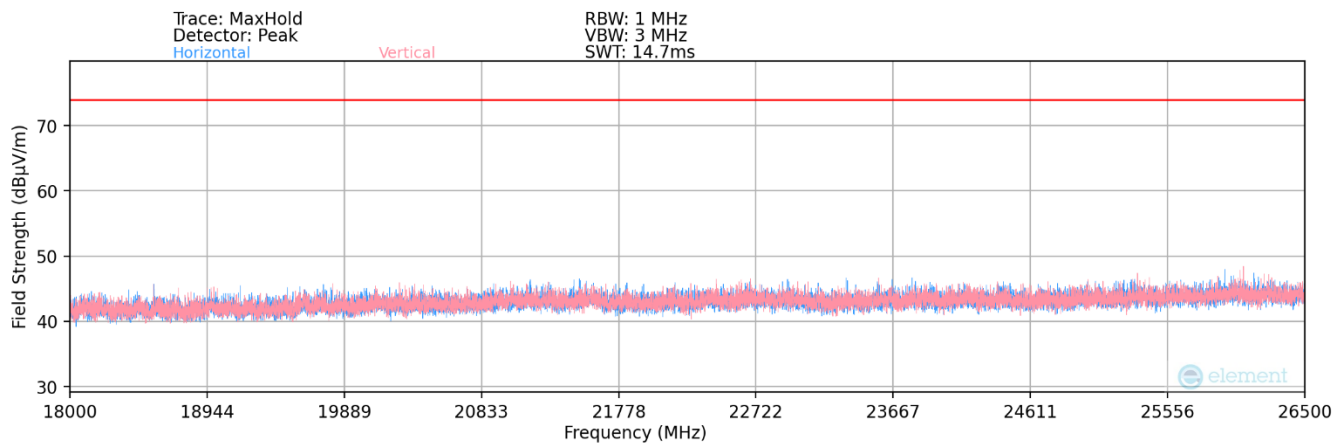

**Plot 7-157. Radiated Spurious Plot 18GHz - 26.5GHz (802.11ax)**

FCC ID: A3LSMX828U	<b>MEASUREMENT REPORT</b>		Approved by: Technical Manager
Test Report S/N: 1M2405140039-13.A3L	Test Dates: 5/23/2024 - 7/28/2024	EUT Type: Portable Tablet	Page 116 of 138

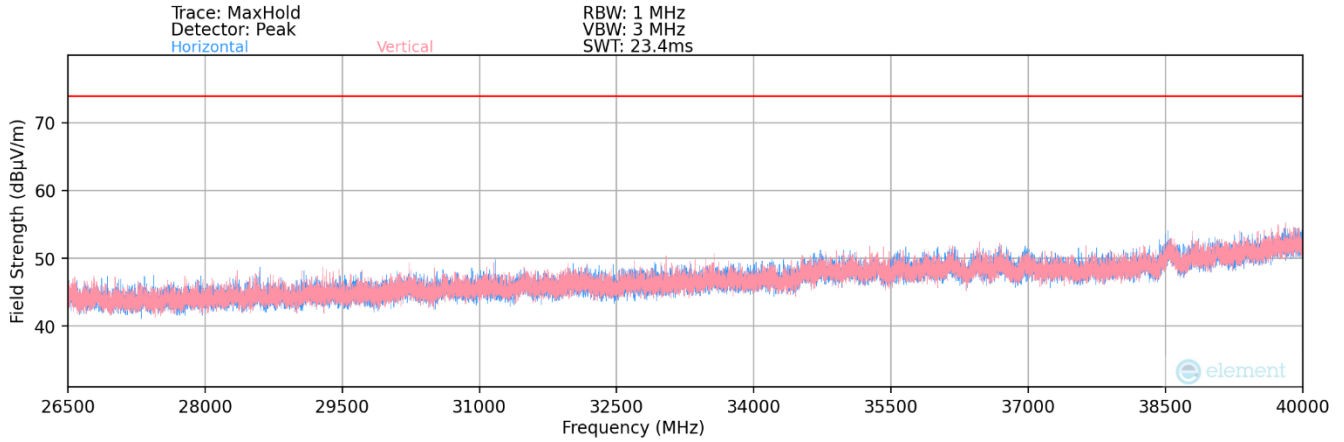

**Plot 7-158. Radiated Spurious Plot 26.5GHz - 40GHz (802.11ax)**

<b>FCC ID:</b> A3LSMX828U	<b>MEASUREMENT REPORT</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2405140039-13.A3L	<b>Test Dates:</b> 5/23/2024 - 7/28/2024	<b>EUT Type:</b> Portable Tablet	Page 117 of 138



## MIMO Radiated Spurious Emission Measurements (242 Tones) – UNII 1

Worst Case Mode: 802.11ax (20MHz BW)  
 Worst Case Transfer Rate: MCS0  
 Distance of Measurements: 1 & 3 Meters

Mode	Antenna	UNII Band	Channel	Test Channel Freq. [MHz]	RU Index	Restricted	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
802.11ax RU 242T	MIMO	1	36	5180	61		10360.00	Peak	V	-	-	-70.17	16.03	0.00	52.86	68.20	-15.34
						*	15540.00	Average	V	-	-	-82.42	23.04	0.00	47.62	53.98	-6.36
						*	15540.00	Peak	V	-	-	-70.76	23.04	0.00	59.28	73.98	-14.70
						*	20720.00	Average	V	-	-	-64.89	3.16	-9.54	35.72	53.98	-18.26
						*	20720.00	Peak	V	-	-	-56.78	3.16	-9.54	43.84	73.98	-30.14
							25900.00	Peak	V	-	-	-55.15	4.24	-9.54	46.54	68.20	-21.66
			40	5200	61		10400.00	Peak	V	-	-	-69.41	16.25	0.00	53.84	68.20	-14.36
						*	15600.00	Average	V	-	-	-81.79	23.40	0.00	48.61	53.98	-5.37
						*	15600.00	Peak	V	-	-	-70.21	23.40	0.00	60.19	73.98	-13.79
						*	20800.00	Average	V	-	-	-64.20	3.15	-9.54	36.41	53.98	-17.57
						*	20800.00	Peak	V	-	-	-55.92	3.15	-9.54	44.69	73.98	-29.29
							26000.00	Peak	V	-	-	-56.75	4.16	-9.54	44.87	68.20	-23.33
			48	5240	61		10480.00	Peak	V	-	-	-70.44	16.26	0.00	52.82	68.20	-15.38
						*	15720.00	Average	V	-	-	-82.42	23.33	0.00	47.91	53.98	-6.07
						*	15720.00	Peak	V	-	-	-70.62	23.33	0.00	59.71	73.98	-14.27
							20960.00	Peak	V	-	-	-55.38	3.27	-9.54	45.36	68.20	-22.84
							26200.00	Peak	V	-	-	-56.58	3.96	-9.54	44.84	68.20	-23.36

**Table 7-27. Radiated Measurements MIMO (242 Tones)**

<b>FCC ID:</b> A3LSMX828U	<b>MEASUREMENT REPORT</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2405140039-13.A3L	<b>Test Dates:</b> 5/23/2024 - 7/28/2024	<b>EUT Type:</b> Portable Tablet	Page 118 of 138





**MIMO Radiated Spurious Emission Measurements (242 Tones) – UNII 2A**

Worst Case Mode: 802.11ax (20MHz BW)  
 Worst Case Transfer Rate: MCS0  
 Distance of Measurements: 1 & 3 Meters

Mode	Antenna	UNII Band	Channel	Test Channel Freq. [MHz]	RU Index	Restricted	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
802.11ax RU 242T	MIMO	2A	52	5260	61		10520.00	Peak	V	-	-	-70.14	16.33	0.00	53.19	68.20	-15.01
						*	15780.00	Average	V	-	-	-82.11	23.33	0.00	48.22	53.98	-5.76
						*	15780.00	Peak	V	-	-	-70.27	23.33	0.00	60.06	73.98	-13.92
						*	21040.00	Average	V	-	-	-64.58	3.35	-9.54	36.23	53.98	-17.75
						*	21040.00	Peak	V	-	-	-55.07	3.35	-9.54	45.73	73.98	-28.25
							26300.00	Peak	V	-	-	-55.51	3.91	-9.54	45.86	68.20	-22.34
				10560.00	Peak	V	-	-	-70.41	16.58	0.00	53.17	68.20	-15.03			
			*	15840.00	Average	V	-	-	-82.20	23.62	0.00	48.42	53.98	-5.56			
			*	15840.00	Peak	V	-	-	-70.79	23.62	0.00	59.83	73.98	-14.15			
			*	21120.00	Average	V	-	-	-64.70	3.46	-9.54	36.23	53.98	-17.75			
			*	21120.00	Peak	V	-	-	-56.50	3.46	-9.54	44.42	73.98	-29.56			
				26400.00	Peak	V	-	-	-55.86	3.71	-9.54	45.32	68.20	-22.88			
			*	10640.00	Average	V	-	-	-81.82	16.85	0.00	42.03	53.98	-11.94			
			*	10640.00	Peak	V	-	-	-69.71	16.85	0.00	54.14	73.98	-19.84			
			*	15960.00	Average	V	-	-	-82.19	24.02	0.00	48.83	53.98	-5.15			
			*	15960.00	Peak	V	-	-	-70.93	24.02	0.00	60.09	73.98	-13.89			
			*	21280.00	Average	V	-	-	-64.84	3.58	-9.54	36.20	53.98	-17.78			
			*	21280.00	Peak	V	-	-	-56.79	3.58	-9.54	44.26	73.98	-29.72			
				26600.00	Peak	V	-	-	-55.84	3.91	-9.54	45.53	68.20	-22.67			

**Table 7-28. Radiated Measurements MIMO (242 Tones)**

<b>FCC ID:</b> A3LSMX828U	<b>MEASUREMENT REPORT</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2405140039-13.A3L	<b>Test Dates:</b> 5/23/2024 - 7/28/2024	<b>EUT Type:</b> Portable Tablet	Page 119 of 138



**MIMO Radiated Spurious Emission Measurements (242 Tones) – UNII 2C**

Worst Case Mode: 802.11ax (20MHz BW)  
 Worst Case Transfer Rate: MCS0  
 Distance of Measurements: 1 & 3 Meters

Mode	Antenna	UNII Band	Channel	Test Channel Freq. [MHz]	RU Index	Restricted	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
802.11ax RU 242T	MIMO	2C	100	5500	61	*	11000.00	Average	V	-	-	-81.70	17.49	0.00	42.79	53.98	-11.19
						*	11000.00	Peak	V	-	-	-70.38	17.49	-9.54	44.57	73.98	-29.41
						*	16500.00	Peak	V	-	-	-71.14	25.00	-9.54	51.32	68.20	-16.88
						*	22000.00	Peak	V	-	-	-55.54	3.53	-9.54	45.45	68.20	-22.75
						*	27500.00	Peak	V	-	-	-55.78	3.97	-9.54	45.66	68.20	-22.54
			120	5600	61	*	11200.00	Average	V	-	-	-81.20	17.61	0.00	43.41	53.98	-10.57
						*	11200.00	Peak	V	-	-	-69.56	17.61	0.00	55.05	73.98	-18.93
						*	16800.00	Peak	V	-	-	-70.76	24.98	0.00	61.22	68.20	-6.98
						*	22400.00	Average	V	-	-	-64.65	3.58	-9.54	36.39	53.98	-17.59
						*	22400.00	Peak	V	-	-	-56.19	3.58	-9.54	44.85	73.98	-29.13
			144	5720	61	*	28000.00	Peak	V	-	-	-55.85	4.52	-9.54	46.13	68.20	-22.07
						*	11440.00	Average	V	-	-	-81.72	18.15	0.00	43.43	53.98	-10.55
						*	11440.00	Peak	V	-	-	-70.23	18.15	0.00	54.92	73.98	-19.06
						*	17160.00	Peak	V	-	-	-71.35	25.10	0.00	60.75	68.20	-7.45
						*	22880.00	Average	V	-	-	-64.80	3.76	-9.54	36.42	53.98	-17.56
			*	22880.00	Peak	V	-	-	-56.78	3.76	-9.54	44.43	73.98	-29.55			
			*	28600.00	Peak	V	-	-	-57.52	4.96	-9.54	44.91	68.20	-23.29			

**Table 7-29. Radiated Measurements MIMO (242 Tones)**

<b>FCC ID:</b> A3LSMX828U	<b>MEASUREMENT REPORT</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2405140039-13.A3L	<b>Test Dates:</b> 5/23/2024 - 7/28/2024	<b>EUT Type:</b> Portable Tablet	Page 120 of 138



**MIMO Radiated Spurious Emission Measurements (242 Tones) – UNII 3**

Worst Case Mode: 802.11ax (20MHz BW)  
 Worst Case Transfer Rate: MCS0  
 Distance of Measurements: 1 & 3 Meters

Mode	Antenna	UNII Band	Channel	Test Channel Freq. [MHz]	RU Index	Restricted	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]		
802.11ax RU 242T	MIMO	3	149	5745	61	*	11490.00	Average	V	-	-	-81.86	18.28	0.00	43.42	53.98	-10.56		
						*	11490.00	Peak	V	-	-	-70.39	18.28	0.00	54.89	73.98	-19.09		
							17235.00	Peak	V	-	-	-70.34	25.51	0.00	62.17	68.20	-6.03		
						*	22980.00	Average	V	-	-	-67.42	3.66	-9.54	33.70	53.98	-20.28		
						*	22980.00	Peak	V	-	-	-56.71	3.66	-9.54	44.41	73.98	-29.57		
							28725.00	Peak	V	-	-	-56.73	5.05	-9.54	45.78	68.20	-22.42		
				157	5785	61	*	11570.00	Average	V	-	-	-	-81.46	18.16	0.00	43.70	53.98	-10.28
			*				11570.00	Peak	V	-	-	-70.46	18.16	0.00	54.70	73.98	-19.28		
							17355.00	Peak	V	-	-	-71.46	26.74	0.00	62.28	68.20	-5.92		
							23140.00	Peak	V	-	-	-54.98	3.65	-9.54	46.14	68.20	-22.06		
							28925.00	Peak	V	-	-	-55.07	4.92	-9.54	47.31	68.20	-20.89		
							165	5825	61	*	11650.00	Average	V	-	-	-	-81.50	18.25	0.00
			*	11650.00	Peak	V				-	-	-69.54	18.25	0.00	55.71	73.98	-18.27		
				17475.00	Peak	V				-	-	-71.88	26.50	0.00	61.62	68.20	-6.58		
				23300.00	Peak	V				-	-	-54.90	3.55	-9.54	46.10	68.20	-22.10		
				29125.00	Peak	V				-	-	-55.34	5.01	-9.54	47.13	68.20	-21.07		

**Table 7-30. Radiated Measurements MIMO (242 Tones)**

<b>FCC ID:</b> A3LSMX828U	<b>MEASUREMENT REPORT</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2405140039-13.A3L	<b>Test Dates:</b> 5/23/2024 - 7/28/2024	<b>EUT Type:</b> Portable Tablet	Page 121 of 138



**MIMO Radiated Spurious Emission Measurements (242 Tones) – UNII 4**

Worst Case Mode: 802.11ax (20MHz BW)  
 Worst Case Transfer Rate: MCS0  
 Distance of Measurements: 1 & 3 Meters


Mode	Antenna	UNII Band	Channel	Test Channel Freq. [MHz]	RU Index	Restricted	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]		
802.11ax RU 242T	MIMO	4	169	5845	61	*	11690.00	Average	V	-	-	-81.65	18.65	0.00	44.00	53.98	-9.98		
						*	11690.00	Peak	V	-	-	-70.33	18.65	0.00	55.32	73.98	-18.66		
							17535.00	Peak	V	-	-	-70.85	26.34	0.00	62.49	68.20	-5.71		
							23380.00	Peak	V	-	-	-55.10	3.53	-9.54	45.89	68.20	-22.31		
							29225.00	Peak	V	-	-	-54.89	5.04	-9.54	47.61	68.20	-20.59		
							35070.00	Peak	V	-	-	-54.88	7.60	-9.54	50.18	68.20	-18.02		
				173	5865	61	*	11730.00	Average	V	-	-	-	-81.56	18.20	0.00	43.64	53.98	-10.34
			*				11730.00	Peak	V	-	-	-70.43	18.20	0.00	54.77	73.98	-19.21		
							17595.00	Peak	V	-	-	-71.04	26.29	0.00	62.25	68.20	-5.95		
							23460.00	Peak	V	-	-	-55.30	3.57	-9.54	45.74	68.20	-22.46		
							29325.00	Peak	V	-	-	-55.12	5.14	-9.54	47.48	68.20	-20.72		
							35190.00	Peak	V	-	-	-56.77	7.80	-9.54	48.49	68.20	-19.71		
				177	5885	61	*	11770.00	Average	V	-	-	-	-81.65	18.48	0.00	43.83	53.98	-10.15
			*				11770.00	Peak	V	-	-	-70.46	18.48	0.00	55.02	73.98	-18.96		
							17655.00	Peak	V	-	-	-71.31	26.16	0.00	61.85	68.20	-6.35		
							23540.00	Peak	V	-	-	-55.91	3.57	-9.54	45.12	68.20	-23.08		
							29425.00	Peak	V	-	-	-54.71	5.13	-9.54	47.88	68.20	-20.32		
							35310.00	Peak	V	-	-	-55.53	7.91	-9.54	49.84	68.20	-18.36		

**Table 7-31. Radiated Measurements MIMO (242 Tones)**


<b>FCC ID:</b> A3LSMX828U	<b>MEASUREMENT REPORT</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2405140039-13.A3L	<b>Test Dates:</b> 5/23/2024 - 7/28/2024	<b>EUT Type:</b> Portable Tablet	Page 122 of 138

### 7.6.3 MIMO Radiated Band Edge Measurements (20MHz BW – Partial Tone – 106T)

Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS0
RU Index:	53
Distance of Measurements:	3 Meters
Operating Frequency:	5180MHz
Channel:	36

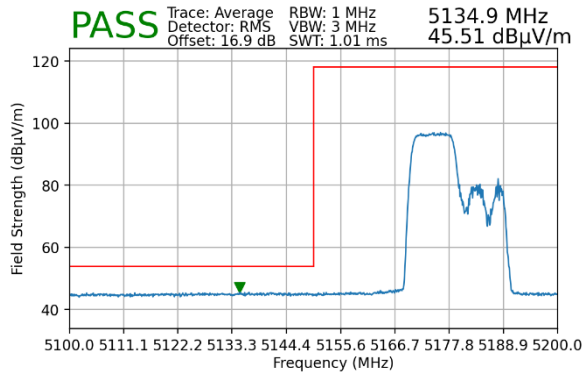


**Plot 7-159. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 1 – 106 Tones)**

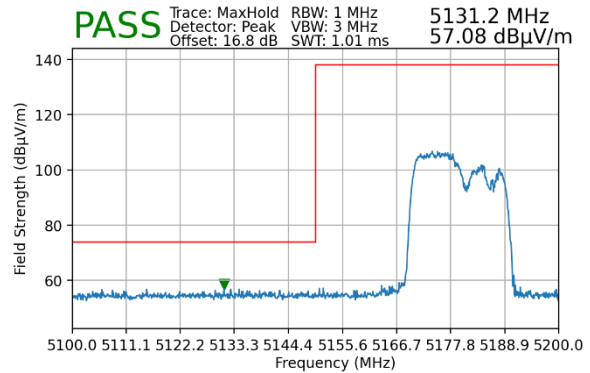


**Plot 7-160. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 1 – 106 Tones)**

Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS0
RU Index:	54
Distance of Measurements:	3 Meters
Operating Frequency:	5320MHz
Channel:	64

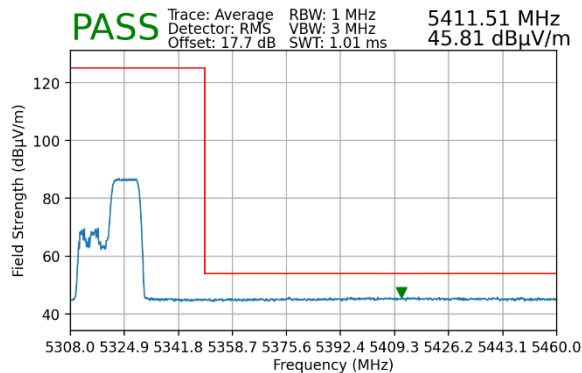


**Plot 7-161. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 2A – 106 Tones)**

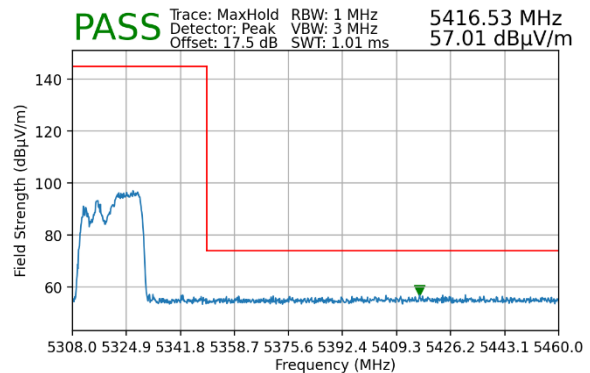


**Plot 7-162. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 2A – 106 Tones)**

FCC ID: A3LSMX828U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2405140039-13.A3L	Test Dates: 5/23/2024 - 7/28/2024	EUT Type: Portable Tablet	Page 123 of 138

Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS0
RU Index:	53
Distance of Measurements:	3 Meters
Operating Frequency:	5500MHz
Channel:	100

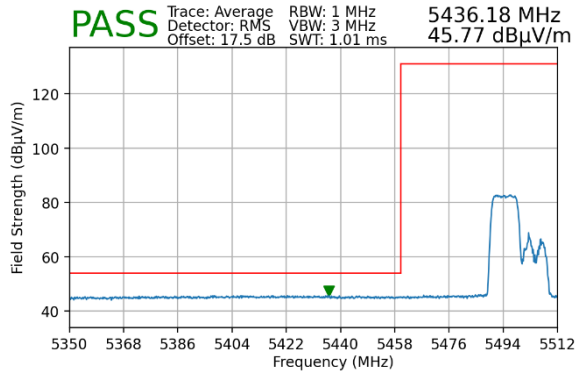


**Plot 7-163. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 2C – 106 Tones)**

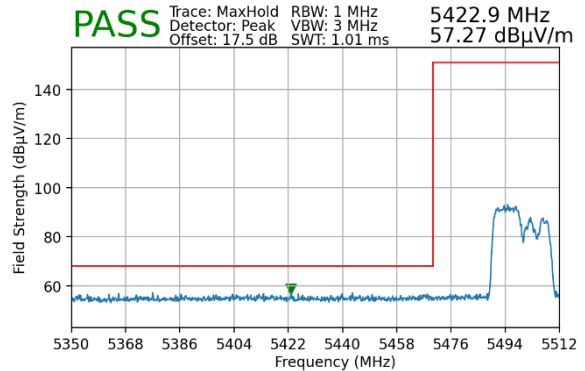

**Plot 7-164. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 2C – 106 Tones)**


Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS0
RU Index:	54
Distance of Measurements:	3 Meters
Operating Frequency:	5825MHz
Channel:	165

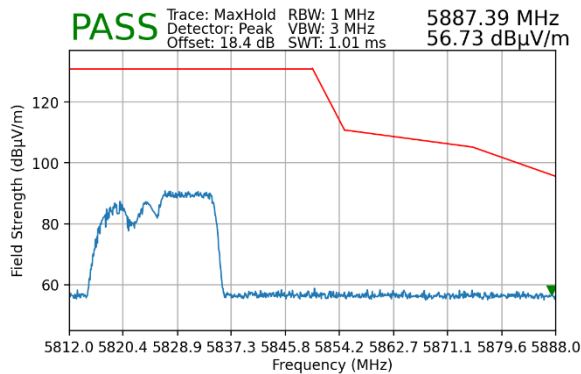

**Plot 7-165. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 3 – 106 Tones)**


FCC ID: A3LSMX828U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2405140039-13.A3L	Test Dates: 5/23/2024 - 7/28/2024	EUT Type: Portable Tablet	Page 124 of 138

Worst Case Mode: 802.11ax  
 Worst Case Transfer Rate: MCS0  
 RU Index: 53  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5845MHz  
 Channel: 169

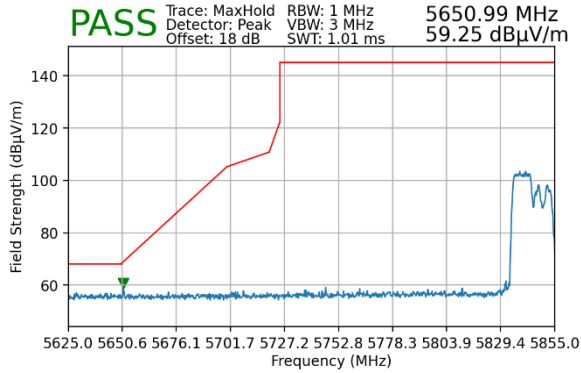


**Plot 7-166. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 4 – 106 Tones)**

Worst Case Mode: 802.11ax  
 Worst Case Transfer Rate: MCS0  
 RU Index: 54  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5885MHz  
 Channel: 177

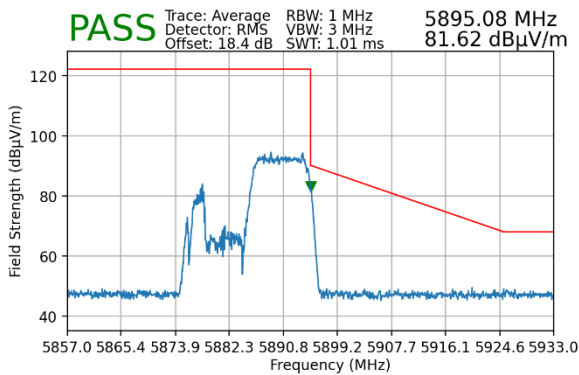

**Plot 7-167. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 4 – 106 Tones)**

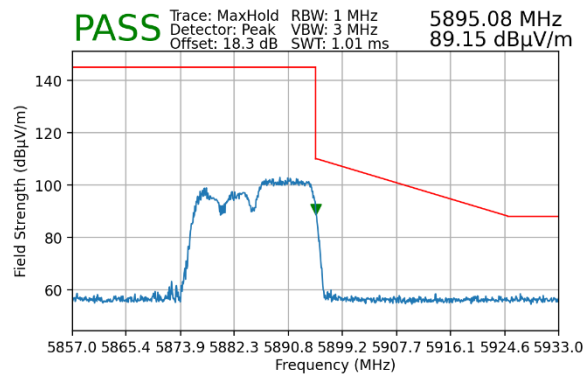


**Plot 7-168. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 4 – 106 Tones)**


FCC ID: A3LSMX828U	<b>MEASUREMENT REPORT</b>		Approved by: Technical Manager
Test Report S/N: 1M2405140039-13.A3L	Test Dates: 5/23/2024 - 7/28/2024	EUT Type: Portable Tablet	Page 125 of 138

### 7.6.4 MIMO Radiated Band Edge Measurements (20MHz BW – Full Tone – 242T)

Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS0
RU Index:	61
Distance of Measurements:	3 Meters
Operating Frequency:	5180MHz
Channel:	36

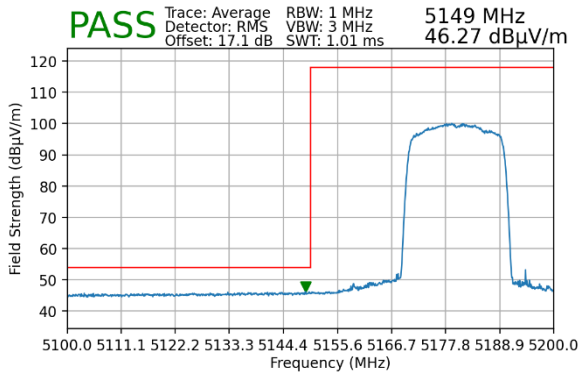


**Plot 7-169. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 1 – 242 Tones)**

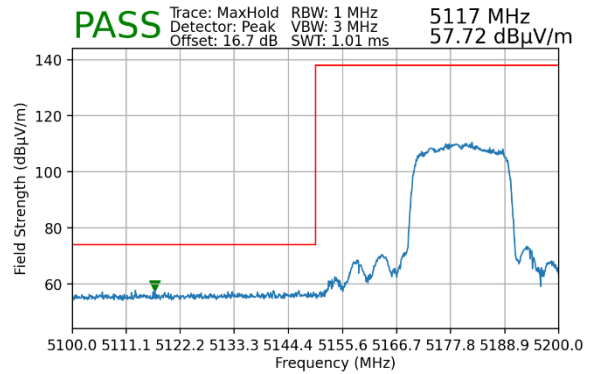


**Plot 7-170. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 1 – 242 Tones)**

Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS0
RU Index:	61
Distance of Measurements:	3 Meters
Operating Frequency:	5320MHz
Channel:	64

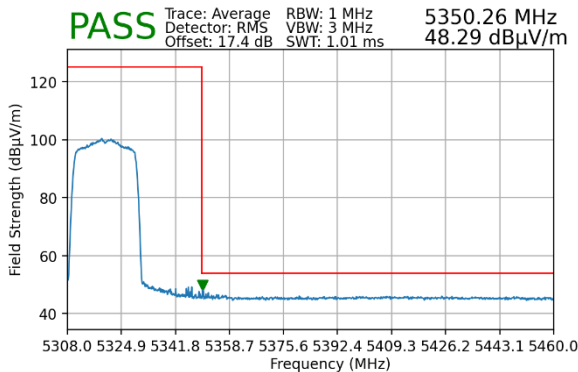

**Plot 7-171. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 2A – 242 Tones)**

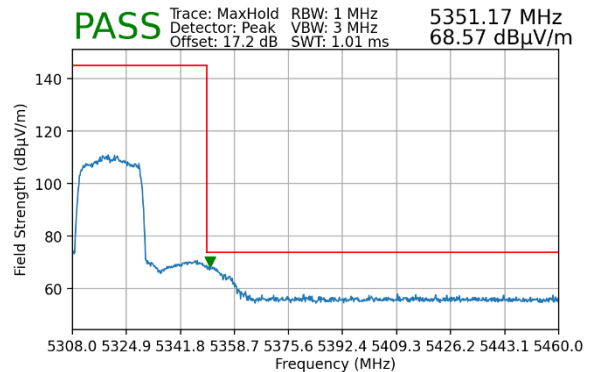

**Plot 7-172. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 2A – 242 Tones)**

FCC ID: A3LSMX828U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2405140039-13.A3L	Test Dates: 5/23/2024 - 7/28/2024	EUT Type: Portable Tablet	Page 126 of 138