

## 7.6 Conducted Spurious Emissions

### Test Overview and Limit

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst-case configuration. For the following out of band conducted spurious emissions plots, the EUT was investigated in all available data rates for “b”, “g”, “n”, “ax” modes. The worst-case spurious emissions for the 2.4GHz band were found while transmitting in “b” mode at 1 Mbps and are shown in the plots below.

***The limit for out-of-band spurious emissions at the band edge is 20dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100kHz bandwidth per the procedure in Section 11.11.3 of ANSI C63.10-2013.***

### Test Procedure Used

ANSI C63.10-2013 – Section 11.11.3

ANSI C63.10-2013 – Section 14.3.3

### Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to 25GHz (separated into two plots per channel)
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = Peak
5. Trace mode = max hold
6. Sweep time = auto couple
7. The trace was allowed to stabilize

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



**Figure 7-5. Test Instrument & Measurement Setup**



FCC ID: A3LSMX828U	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Technical Manager
Test Report S/N: 1M2405140039-10.A3L	Test Dates: 6/10/2024 - 7/30/2024	EUT Type: Portable Tablet	Page 94 of 133

**Test Notes**


1. RBW was set to 1MHz rather than 100kHz in order to increase the measurement speed.
2. The display line shown in the following plots denotes the limit at 30dB below the fundamental emission level measured in a 100kHz bandwidth. However, since the traces in the following plots are measured with a 1MHz RBW, the display line may not necessarily appear to be 30dB below the level of the fundamental in a 1MHz bandwidth.
3. For plots showing conducted spurious emissions near the limit, the frequencies were investigated with a reduced RBW to ensure that no emissions were present.
4. The conducted spurious emissions were measured to relative limits. Therefore, in accordance with ANSI C63.10-2013 Section 14.3.3, it was unnecessary to show compliance through the summation of test results of the individual outputs.

FCC ID: A3LSMX828U	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2405140039-10.A3L	<b>Test Dates:</b> 6/10/2024 - 7/30/2024	<b>EUT Type:</b> Portable Tablet	Page 95 of 133


### 7.6.1 SISO Antenna-1 Conducted Spurious Emission

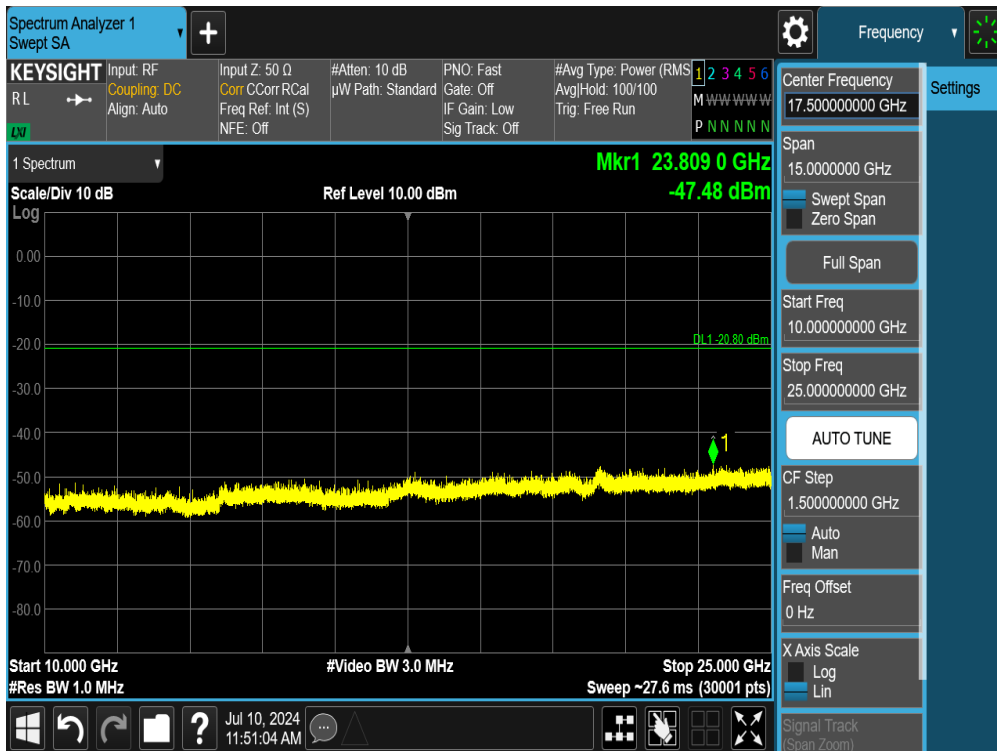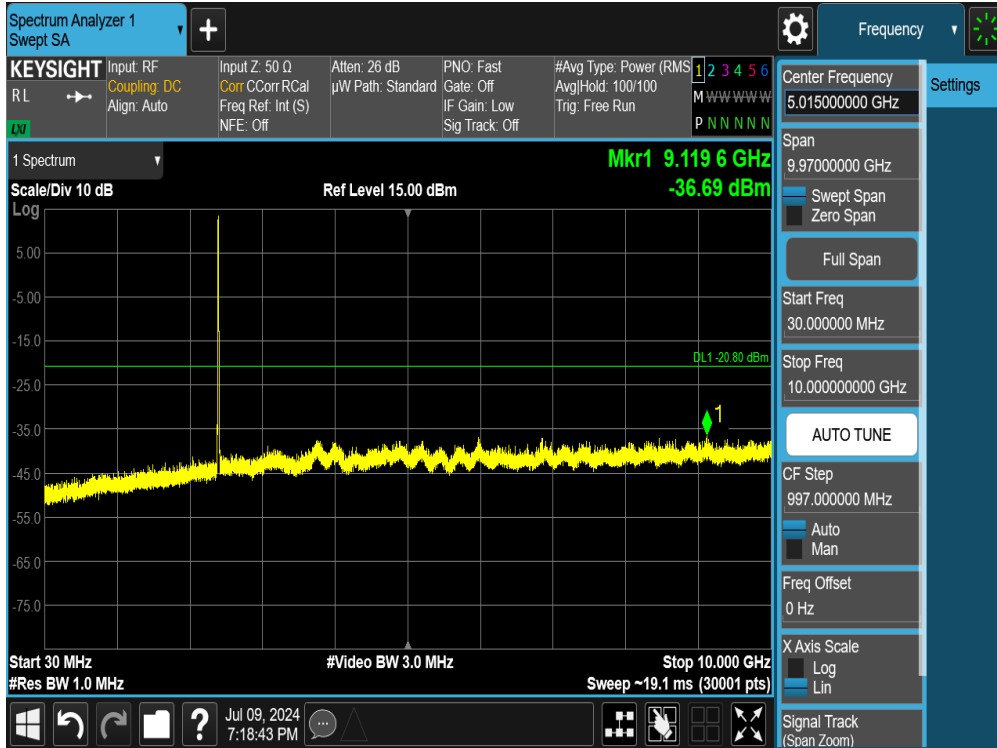

MEASUREMENT REPORT (CERTIFICATION)			Approved by: Technical Manager
FCC ID: A3LSMX828U	Test Report S/N: 1M2405140039-10.A3L	Test Dates: 6/10/2024 - 7/30/2024	Page 96 of 133
	EUT Type: Portable Tablet		

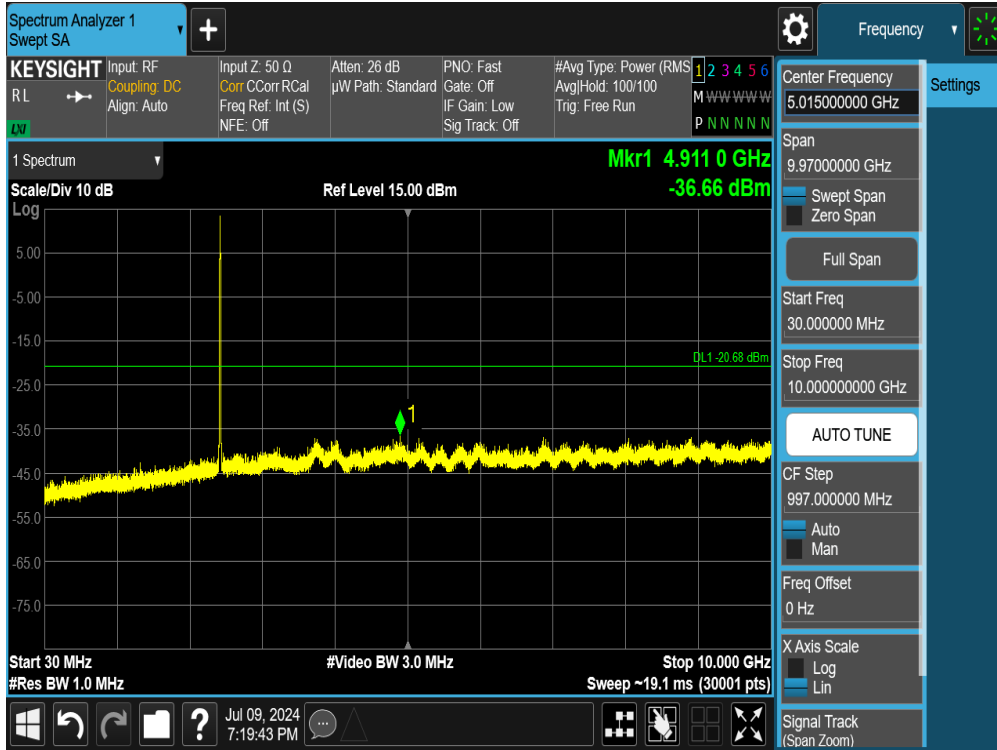


Plot 7-131. Conducted Spurious Plot SISO ANT1 (802.11b – Ch. 6)

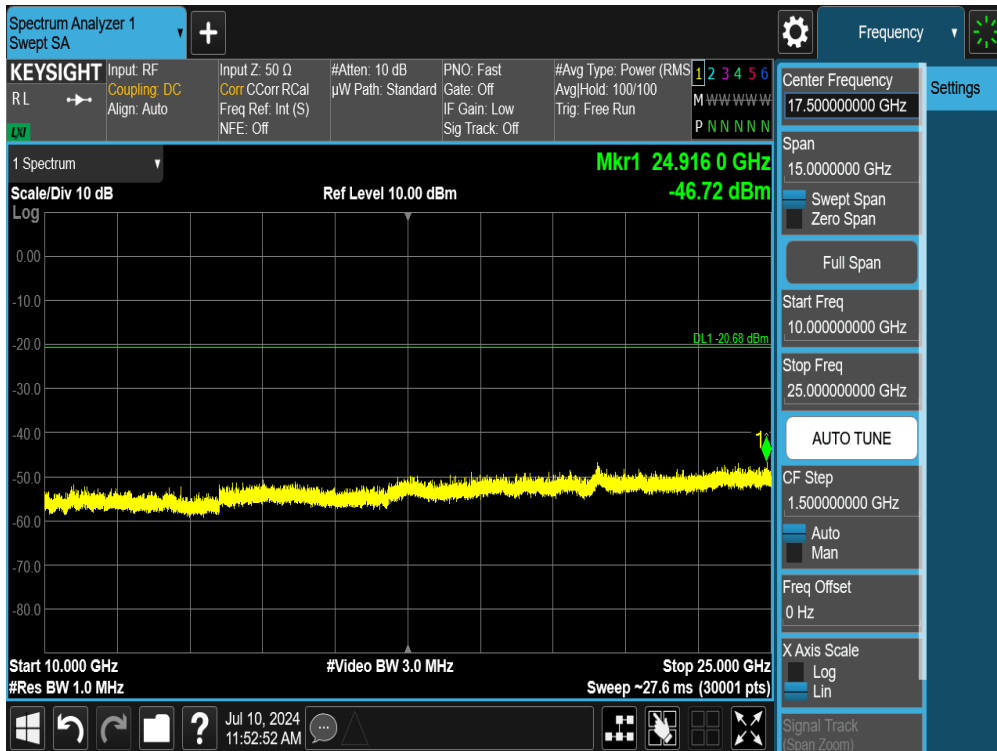


Plot 7-132. Conducted Spurious Plot SISO ANT1 (802.11b – Ch. 6)

FCC ID: A3LSMX828U	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Technical Manager
Test Report S/N: 1M2405140039-10.A3L	Test Dates: 6/10/2024 - 7/30/2024	EUT Type: Portable Tablet	Page 97 of 133

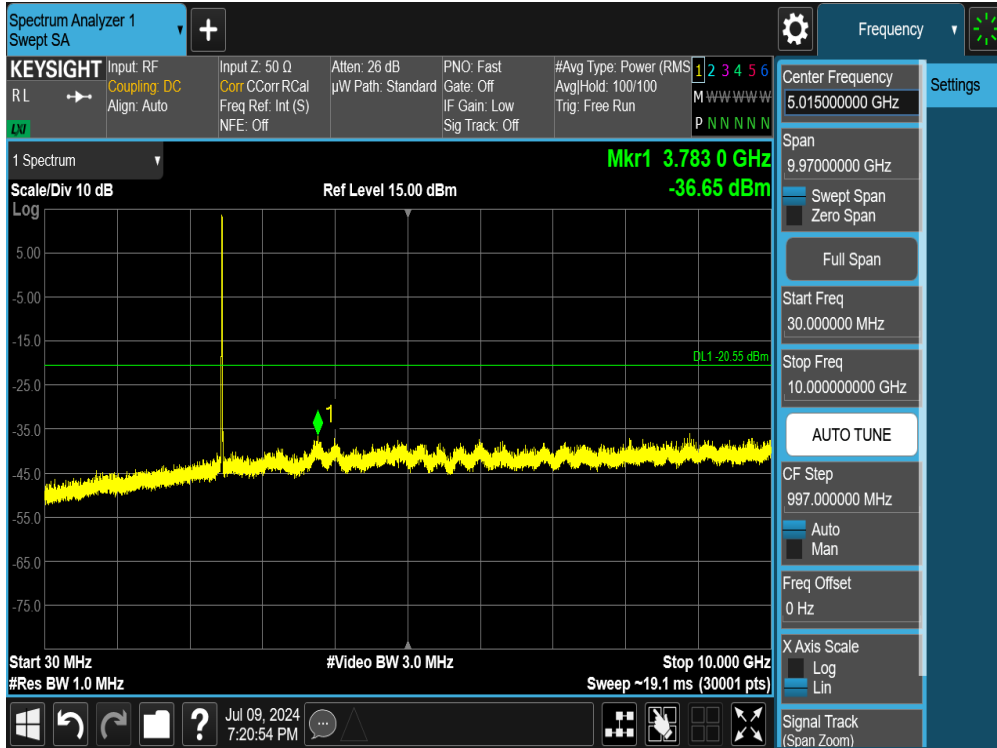



**Plot 7-133. Conducted Spurious Plot SISO ANT1 (802.11b – Ch. 11)**

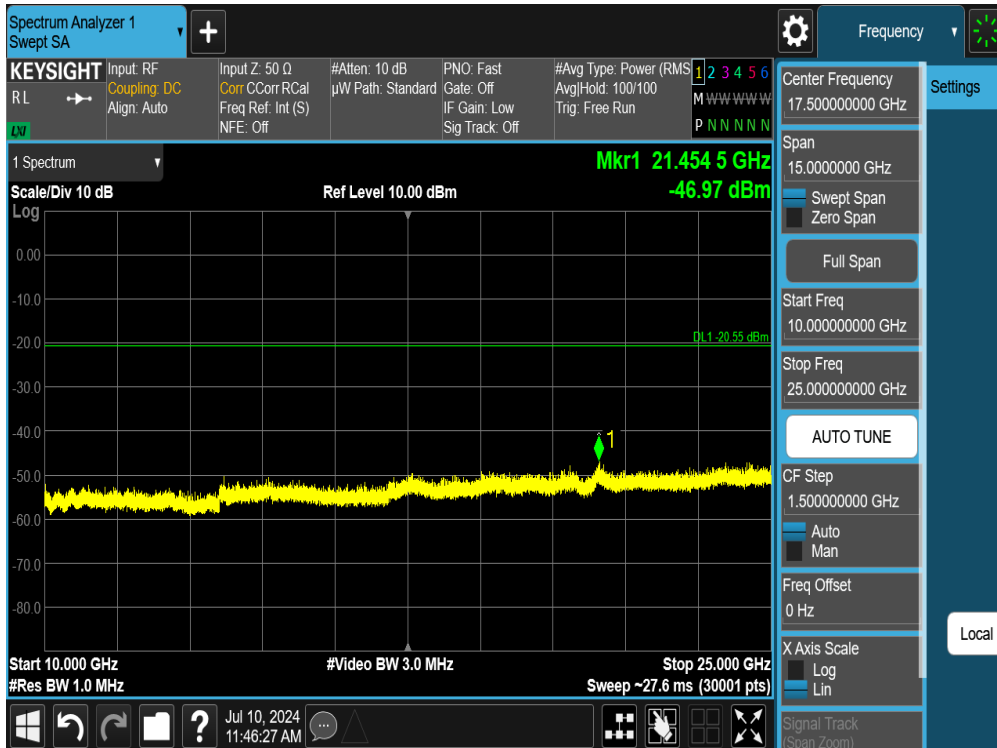


**Plot 7-134. Conducted Spurious Plot SISO ANT1 (802.11b – Ch. 11)**

FCC ID: A3LSMX828U	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Technical Manager
Test Report S/N: 1M2405140039-10.A3L	Test Dates: 6/10/2024 - 7/30/2024	EUT Type: Portable Tablet	Page 98 of 133


## 7.6.2 SISO Antenna-2 Conducted Spurious Emissions

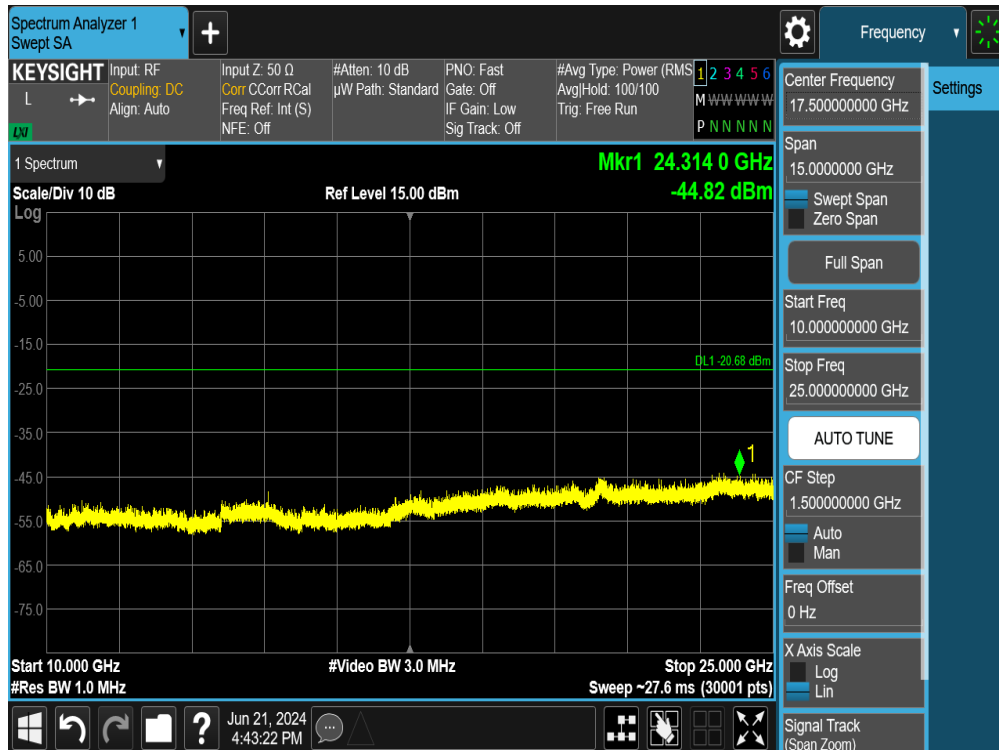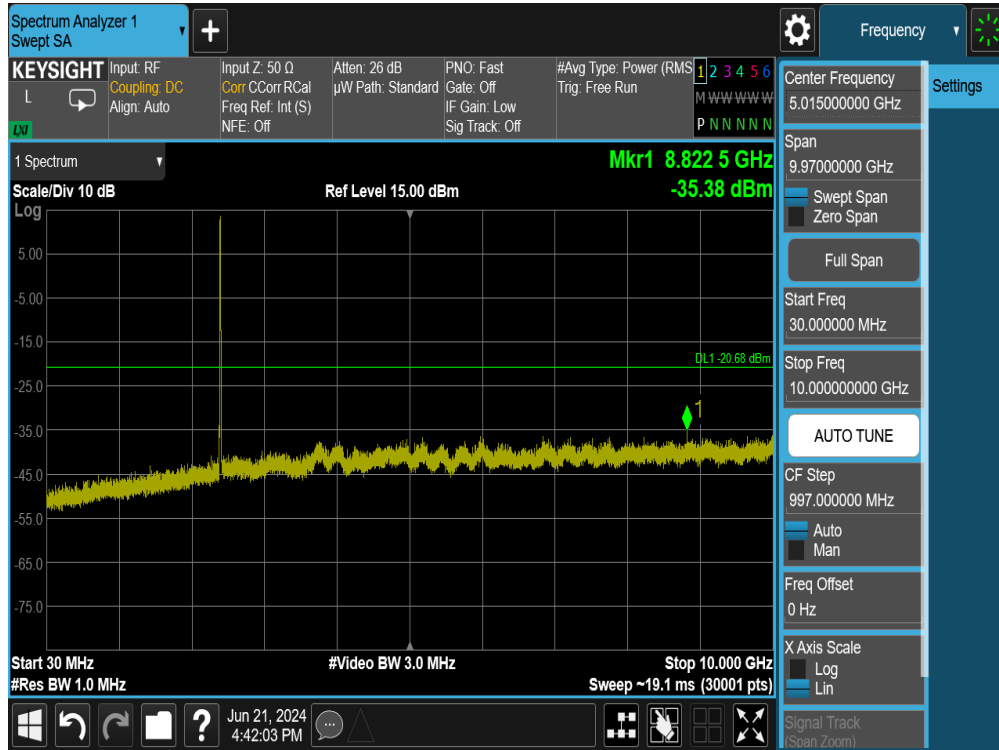

MEASUREMENT REPORT (CERTIFICATION)			Approved by: Technical Manager
FCC ID: A3LSMX828U	Test Report S/N: 1M2405140039-10.A3L	Test Dates: 6/10/2024 - 7/30/2024	Page 99 of 133
EUT Type: Portable Tablet			

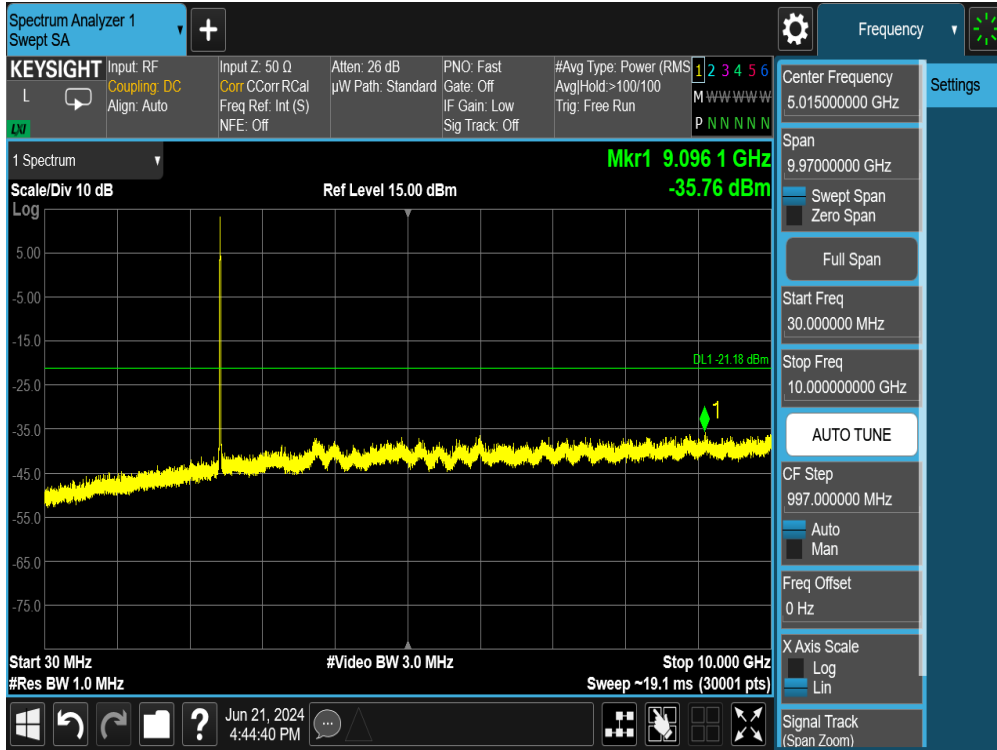


Plot 7-137. Conducted Spurious Plot SISO ANT2 (802.11b – Ch. 6)

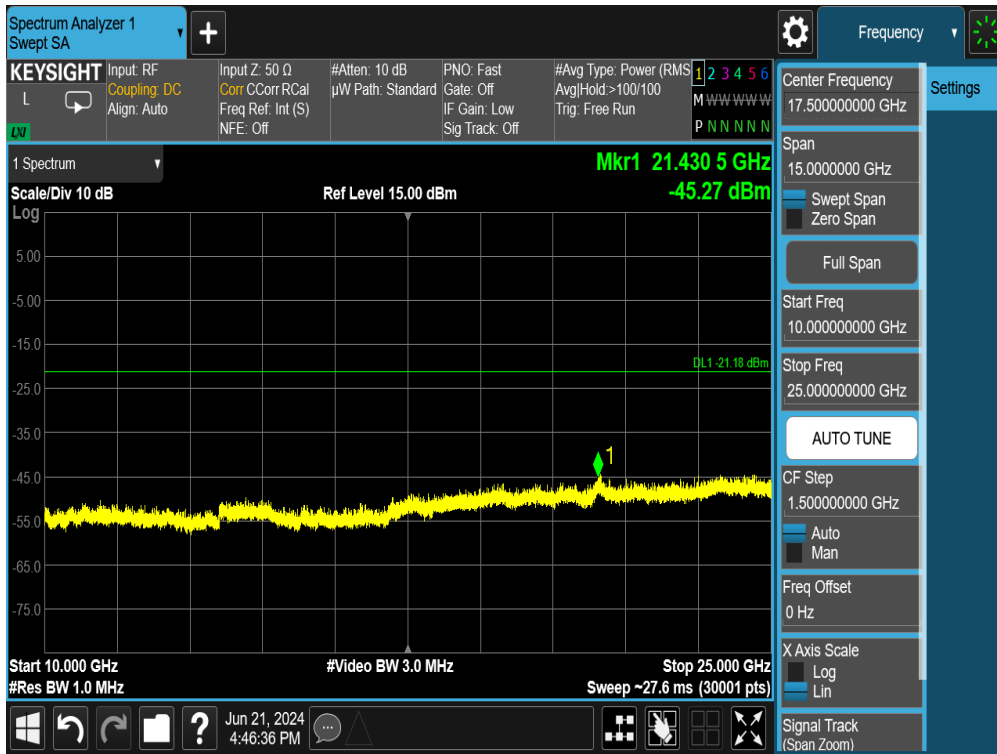


Plot 7-138. Conducted Spurious Plot SISO ANT2 (802.11b – Ch. 6)

FCC ID: A3LSMX828U	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Technical Manager
Test Report S/N: 1M2405140039-10.A3L	Test Dates: 6/10/2024 - 7/30/2024	EUT Type: Portable Tablet	Page 100 of 133

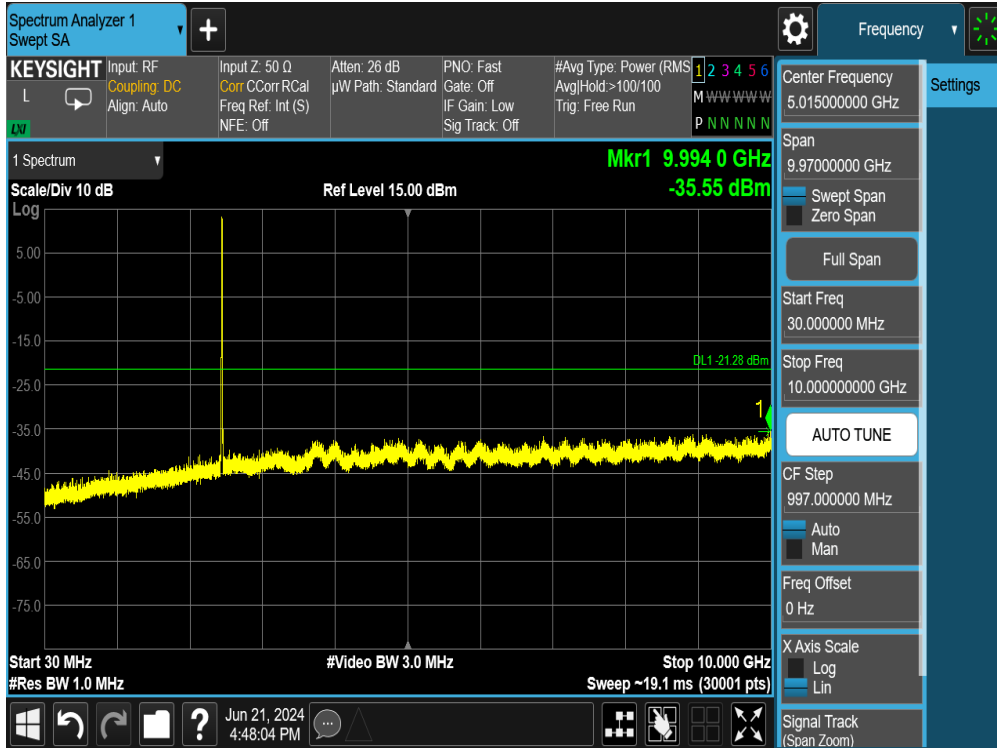

Plot 7-139. Conducted Spurious Plot SISO ANT2 (802.11b – Ch. 11)


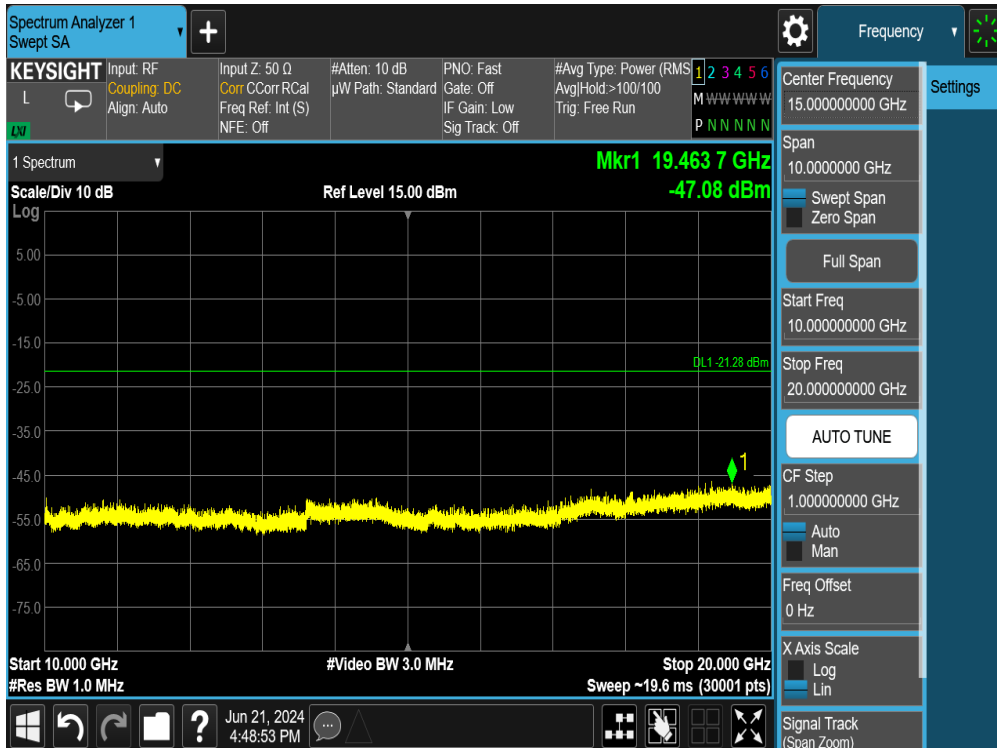


Plot 7-140. Conducted Spurious Plot SISO ANT2 (802.11b – Ch. 11)


FCC ID: A3LSMX828U	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Technical Manager
Test Report S/N: 1M2405140039-10.A3L	Test Dates: 6/10/2024 - 7/30/2024	EUT Type: Portable Tablet	Page 101 of 133




### 7.6.3 MIMO Conducted Spurious Emissions

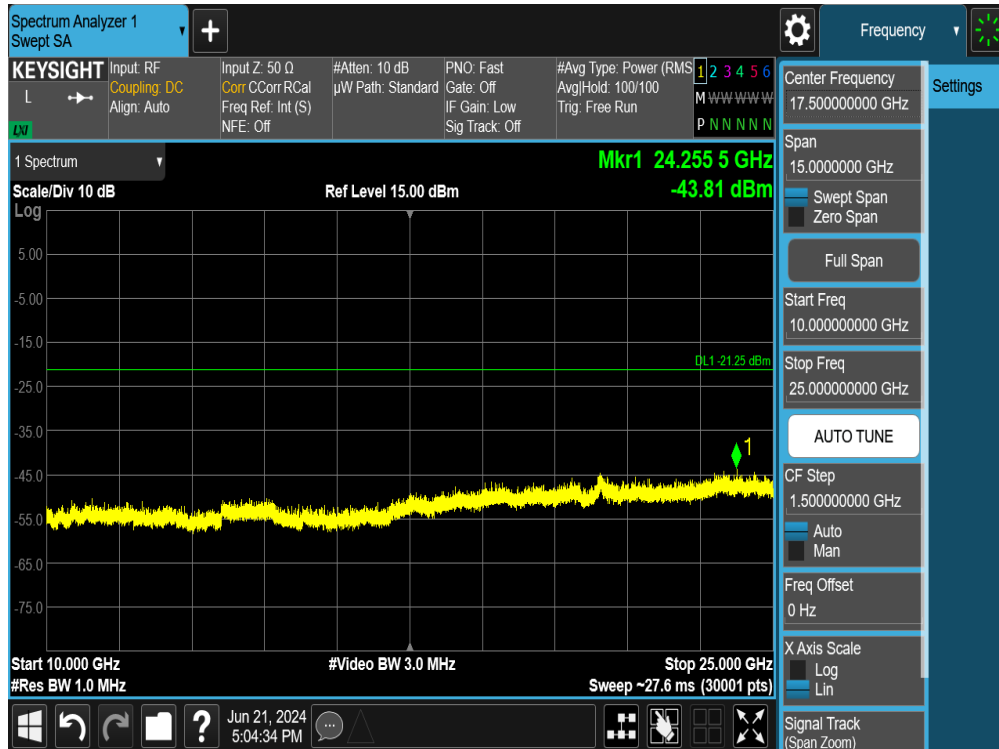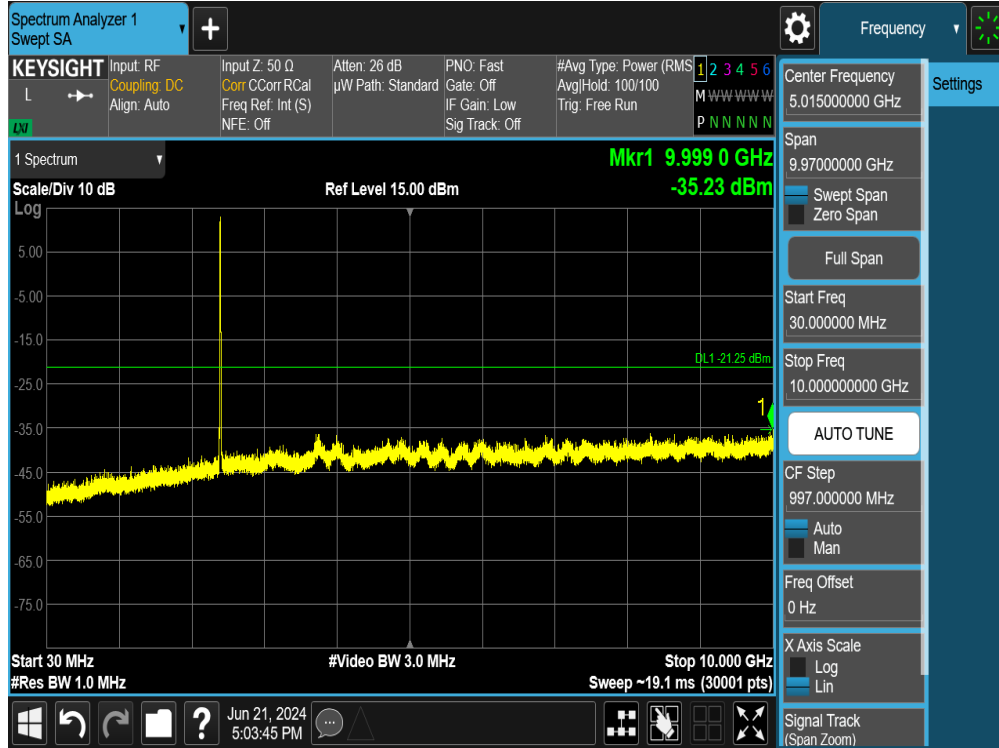

FCC ID: A3LSMX828U	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Technical Manager
Test Report S/N: 1M2405140039-10.A3L	Test Dates: 6/10/2024 - 7/30/2024	EUT Type: Portable Tablet	Page 102 of 133

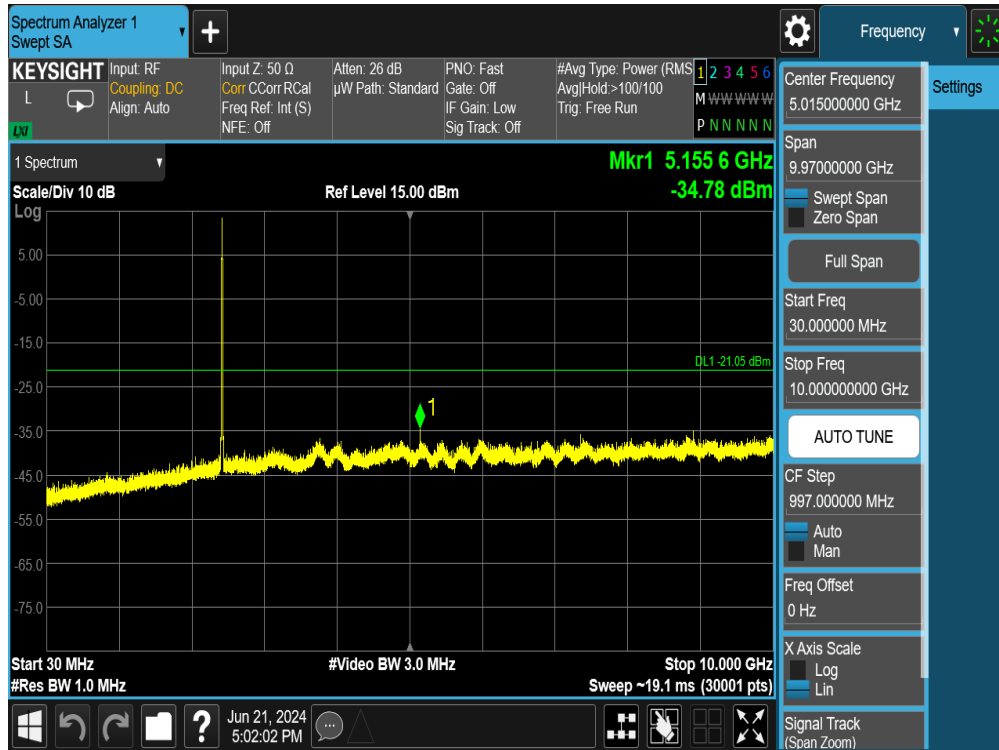


Plot 7-143. Conducted Spurious Plot MIMO ANT1 (802.11b – Ch. 6)

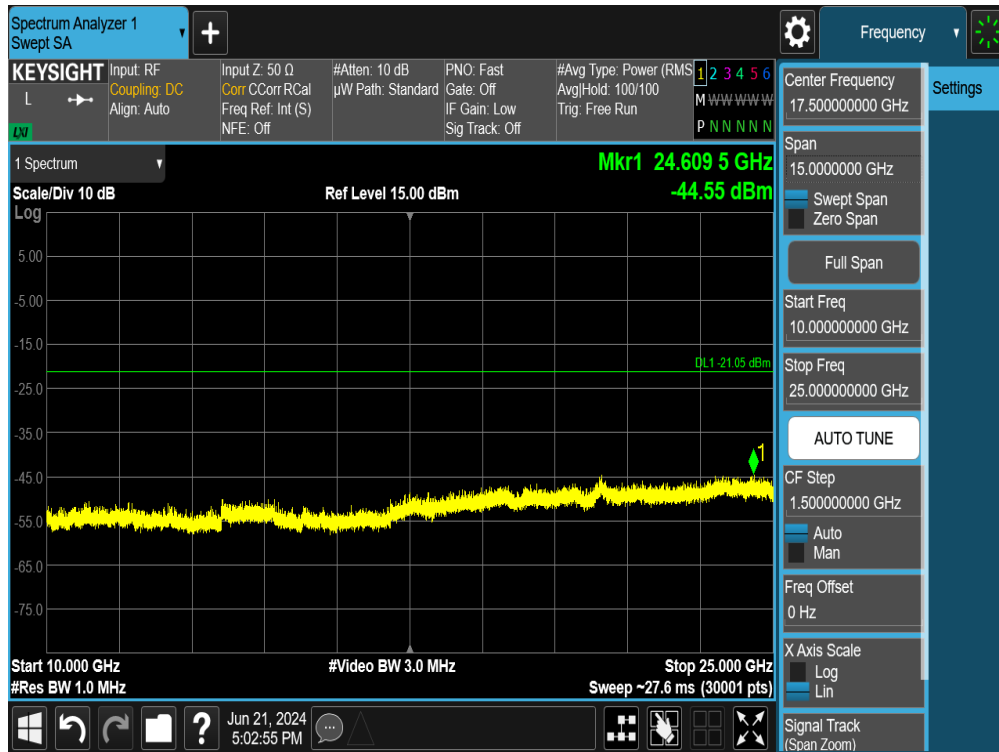


Plot 7-144. Conducted Spurious Plot MIMO ANT1 (802.11b – Ch. 6)

FCC ID: A3LSMX828U	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Technical Manager
Test Report S/N: 1M2405140039-10.A3L	Test Dates: 6/10/2024 - 7/30/2024	EUT Type: Portable Tablet	Page 103 of 133

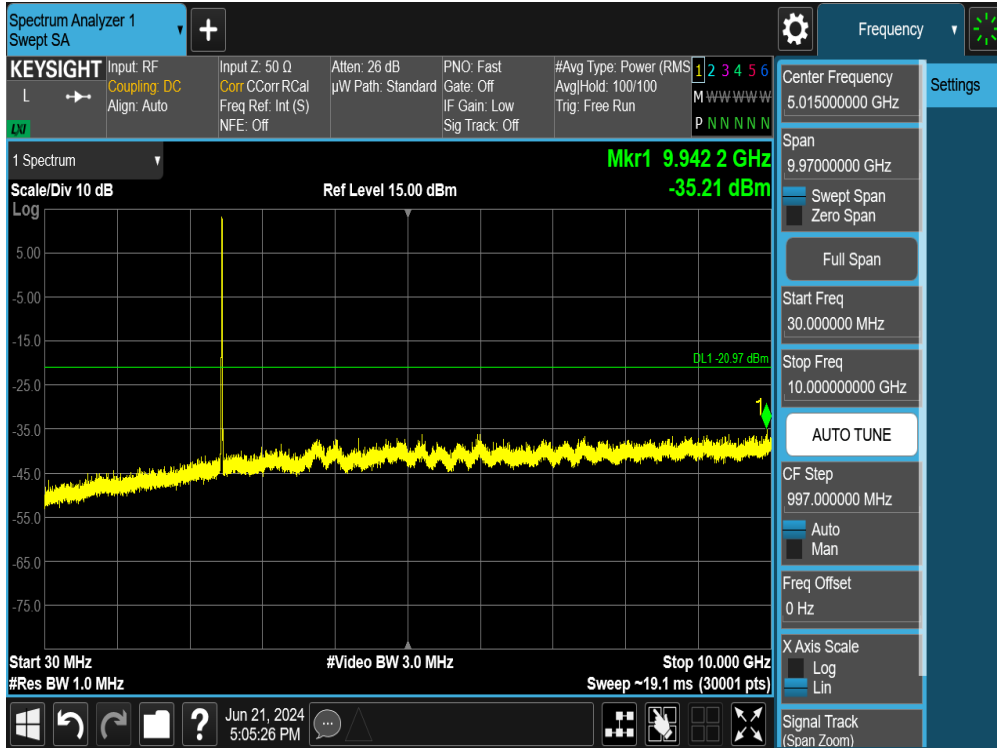


Plot 7-145. Conducted Spurious Plot MIMO ANT1 (802.11b – Ch. 11)

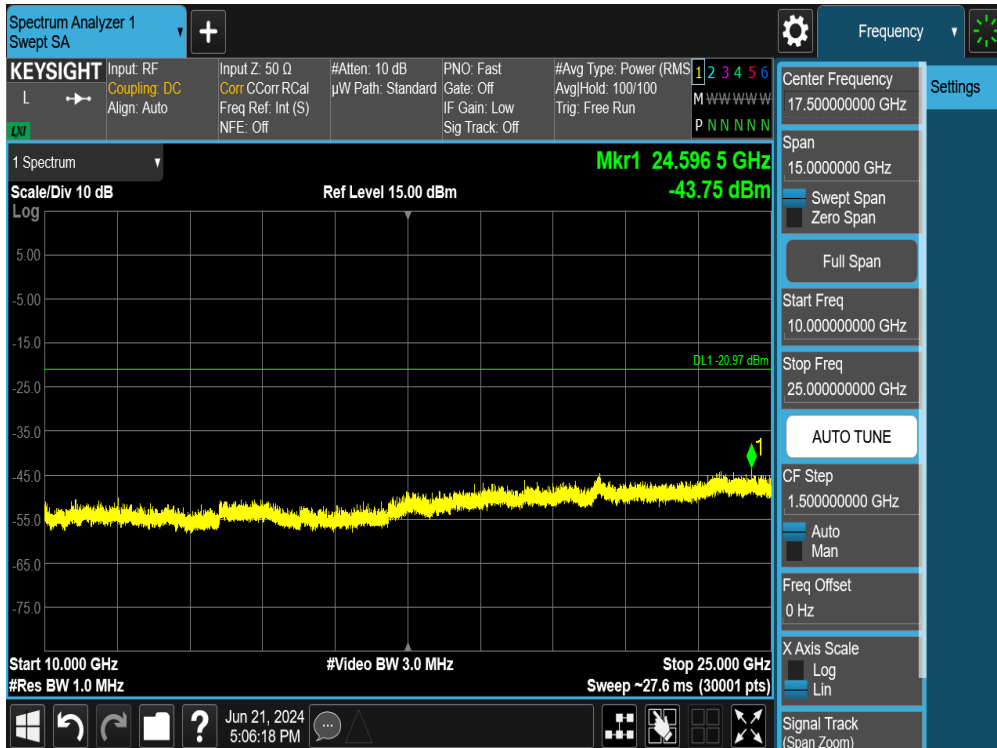

Plot 7-146. Conducted Spurious Plot MIMO ANT1 (802.11b – Ch. 11)

FCC ID: A3LSMX828U	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Technical Manager
Test Report S/N: 1M2405140039-10.A3L	Test Dates: 6/10/2024 - 7/30/2024	EUT Type: Portable Tablet	Page 104 of 133

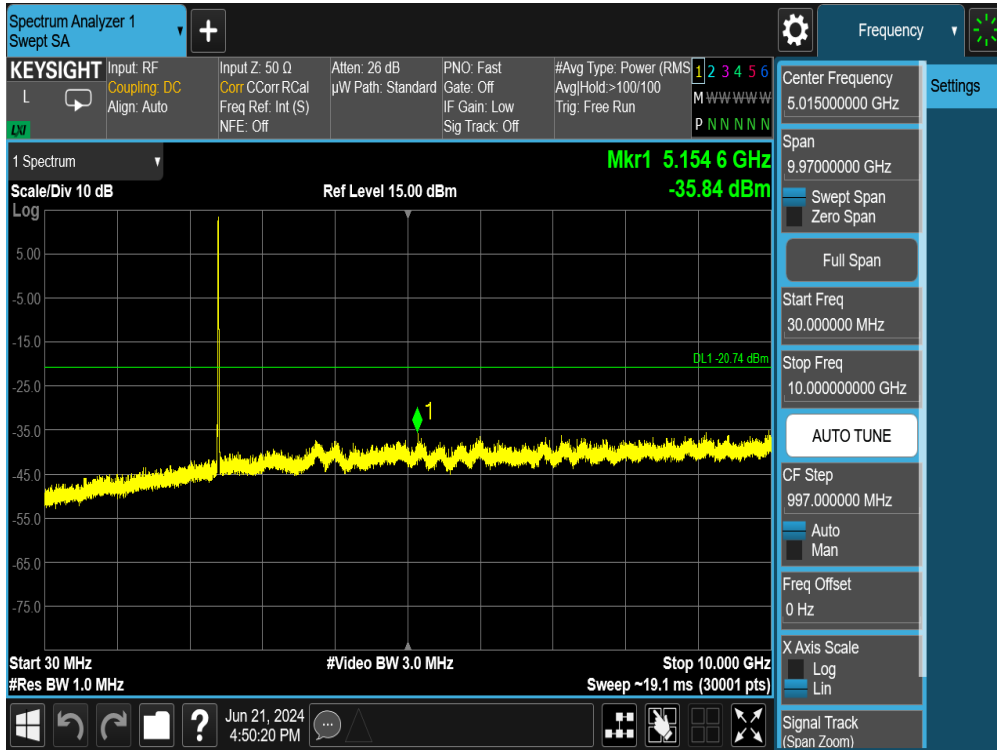

Plot 7-147. Conducted Spurious Plot MIMO ANT2 (802.11b – Ch. 1)




Plot 7-148. Conducted Spurious Plot MIMO ANT2 (802.11b – Ch. 1)

FCC ID: A3LSMX828U	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Technical Manager
Test Report S/N: 1M2405140039-10.A3L	Test Dates: 6/10/2024 - 7/30/2024	EUT Type: Portable Tablet	Page 105 of 133





Plot 7-149. Conducted Spurious Plot MIMO ANT2 (802.11b – Ch. 6)

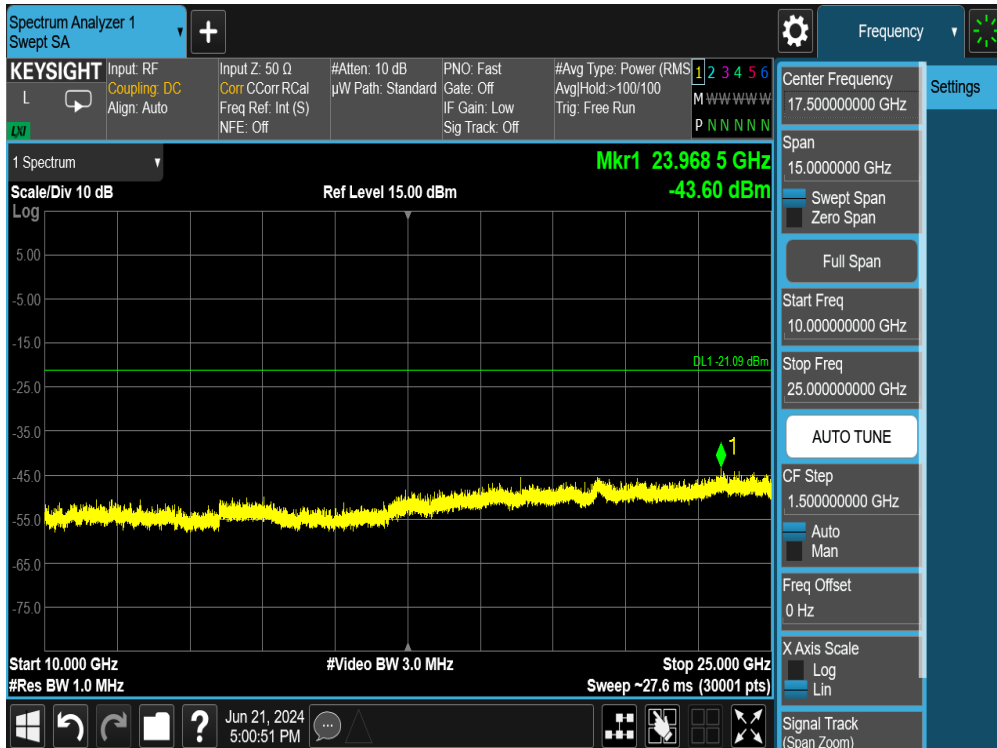

Plot 7-150. Conducted Spurious Plot MIMO ANT2 (802.11b – Ch. 6)

FCC ID: A3LSMX828U	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Technical Manager
Test Report S/N: 1M2405140039-10.A3L	Test Dates: 6/10/2024 - 7/30/2024	EUT Type: Portable Tablet	Page 106 of 133

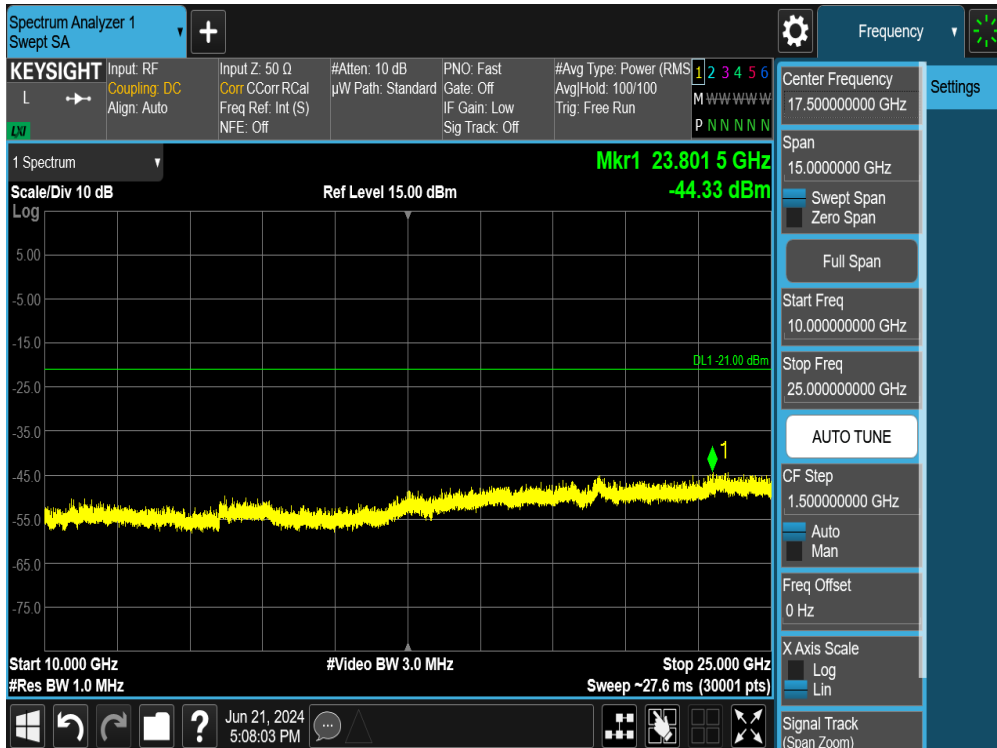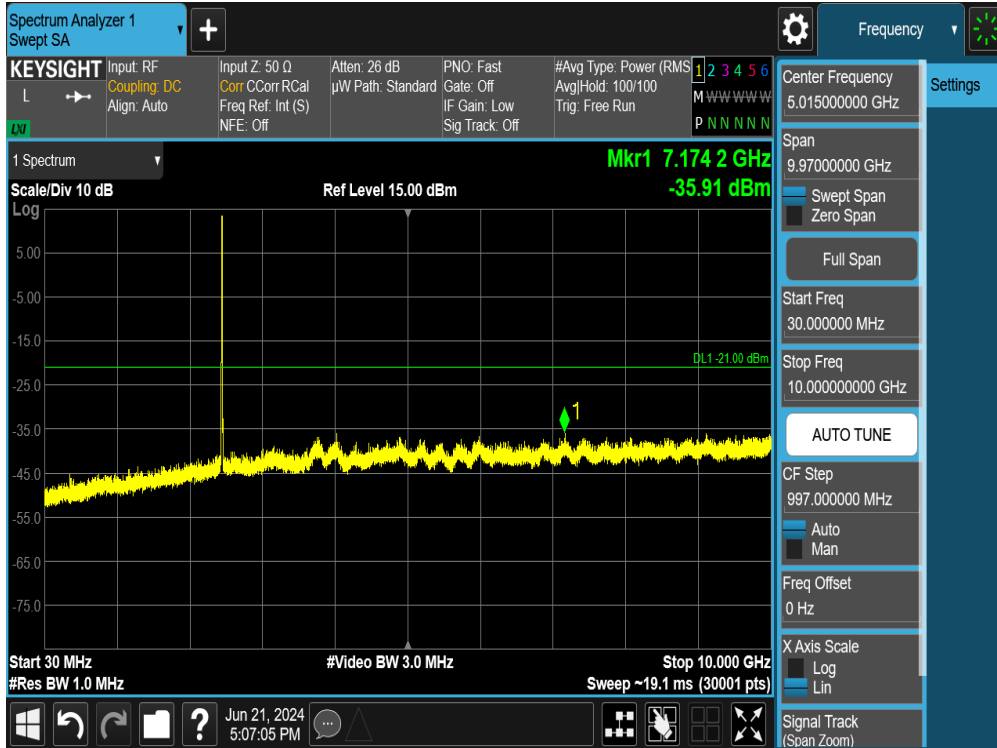

FCC ID: A3LSMX828U	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Technical Manager
Test Report S/N: 1M2405140039-10.A3L	Test Dates: 6/10/2024 - 7/30/2024	EUT Type: Portable Tablet	Page 107 of 133

## 7.7 Radiated Emission Measurements

### Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst-case emissions are reported in this section.

***All out of band emissions appearing in a restricted band as specified in FCC §15.205 of the Title 47 CFR must not exceed the limits shown FCC §15.209.***

Frequency	Field Strength [ $\mu\text{V/m}$ ]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

**Table 7-11. Radiated Limits**

### Test Procedures Used

ANSI C63.10-2013 – Section 6.6.4.3

### Test Settings – Above 1GHz

#### Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = power average (RMS)
5. Number of measurement points = 1001 (Number of points must be  $\geq 2 \times \text{span} \backslash \backslash \text{RBW}$ )
6. Sweep time = auto
7. Trace (RMS) averaging was performed over at least 100 traces

FCC ID: A3LSMX828U	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Technical Manager
Test Report S/N: 1M2405140039-10.A3L	Test Dates: 6/10/2024 - 7/30/2024	EUT Type: Portable Tablet	Page 108 of 133

**Peak Field Strength Measurements**

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize


**Test Settings – Below 1GHz**

**Quasi-Peak Field Strength Measurements**

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

**Test Setup**


The EUT and measurement equipment were set up as shown in the diagram below.

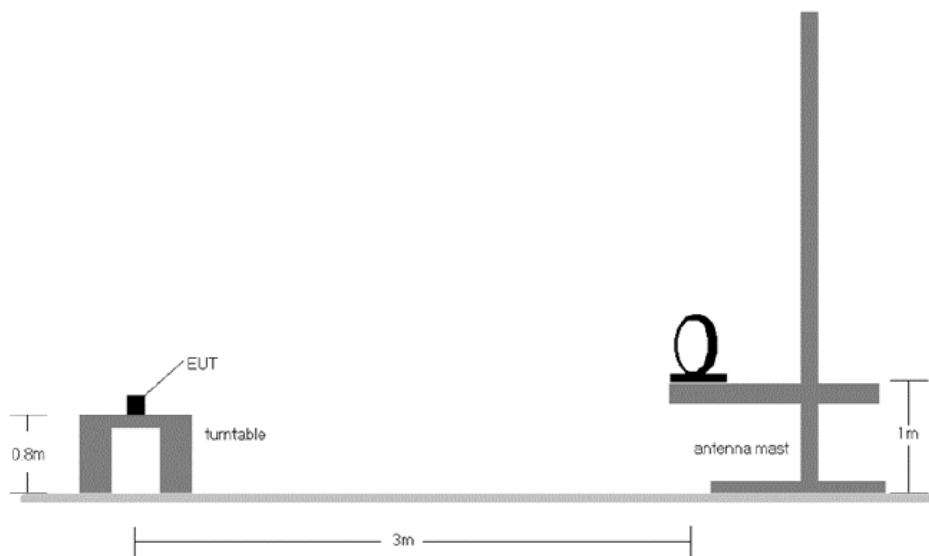


**Figure 7-6. Radiated Test Setup < 30MHz**

FCC ID: A3LSMX828U	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Technical Manager
Test Report S/N: 1M2405140039-10.A3L	Test Dates: 6/10/2024 - 7/30/2024	EUT Type: Portable Tablet	Page 109 of 133



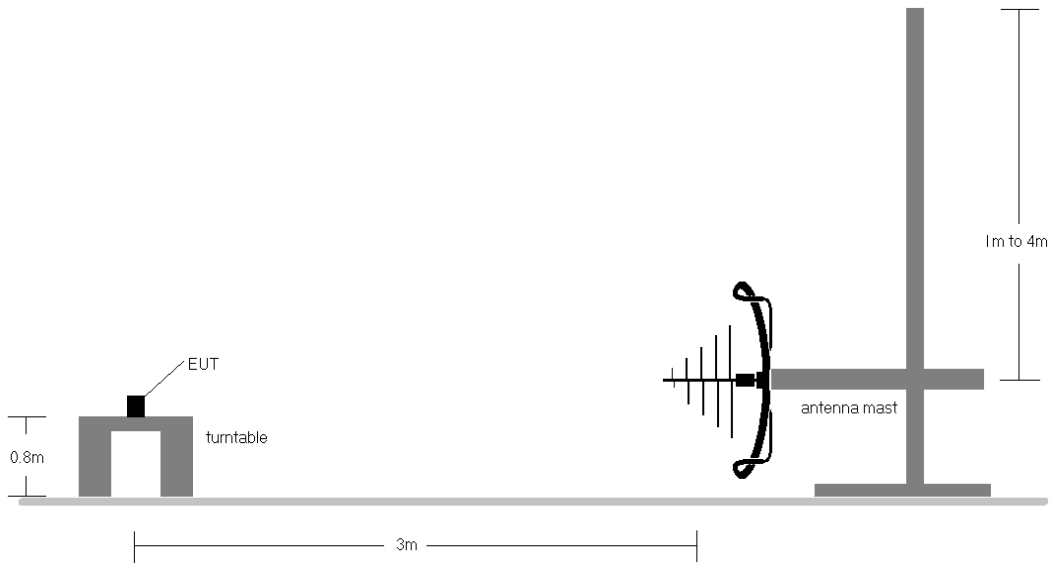

**Figure 7-7. Radiated Test Setup < 1GHz**

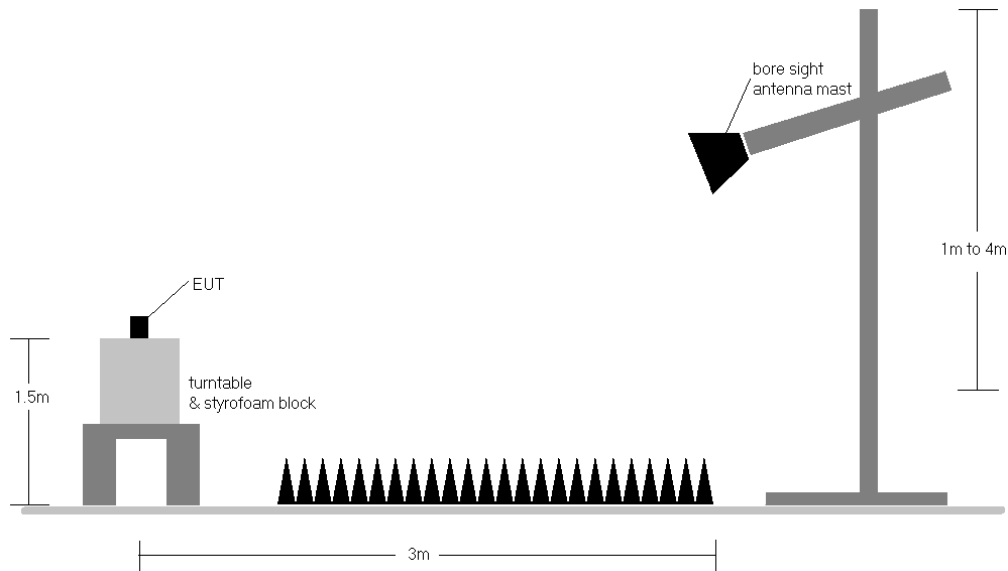

**Figure 7-8. Radiated Test Setup > 1GHz**

**Test Notes**

1. The optional test procedures for antenna port conducted measurements of unwanted emissions per the guidance of ANSI C63.10-2013 Section 11.3 were not used to evaluate this device for compliance to radiated limits. All radiated spurious emissions levels were measured in a radiated test setup.
2. All emissions lying in restricted bands specified in §15.205 is below the limits shown in §15.209.

FCC ID: A3LSMX828U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2405140039-10.A3L	Test Dates: 6/10/2024 - 7/30/2024	EUT Type: Portable Tablet	Page 110 of 133

3. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
4. This unit was tested with its standard battery.
5. The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. Above 1 GHz, average and peak measurements were taken using linearly polarized horn antennas. The worst-case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
6. Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
7. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. Any emissions found to be within 20dB of the limit are fully investigated and the results are shown in this section.
8. The "-" shown in the following RSE tables are used to denote a noise floor measurement.
9. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst-case results during the transmitter spurious emissions testing.
10. No spurious emissions were detected within 20dB of the limit below 30MHz.
11. The results recorded using the broadband antenna are known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
12. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. There were no emissions detected in the 30MHz – 1GHz frequency range, as shown in the subsequent plots.

## Sample Calculations

### Determining Spurious Emissions Levels


- Field Strength Level  $_{[dB_{\mu V/m}]}$  = Analyzer Level  $_{[dBm]}$  + 107 + AFCL  $_{[dB/m]}$
- AFCL  $_{[dB/m]}$  = Antenna Factor  $_{[dB/m]}$  + Cable Loss  $_{[dB]}$
- Margin  $_{[dB]}$  = Field Strength Level  $_{[dB_{\mu V/m}]}$  – Limit  $_{[dB_{\mu V/m}]}$

### Radiated Band Edge Measurement Offset


- The amplitude offset shown in the radiated restricted band edge plots in Section 7.7 was calculated using the formula:  
Offset (dB) = (Antenna Factor + Cable Loss + Attenuator) – Pre-amplifier Gain

FCC ID: A3LSMX828U	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Technical Manager
Test Report S/N: 1M2405140039-10.A3L	Test Dates: 6/10/2024 - 7/30/2024	EUT Type: Portable Tablet	Page 111 of 133


### 7.7.1 SISO Antenna-1 Radiated Spurious Emission Measurements

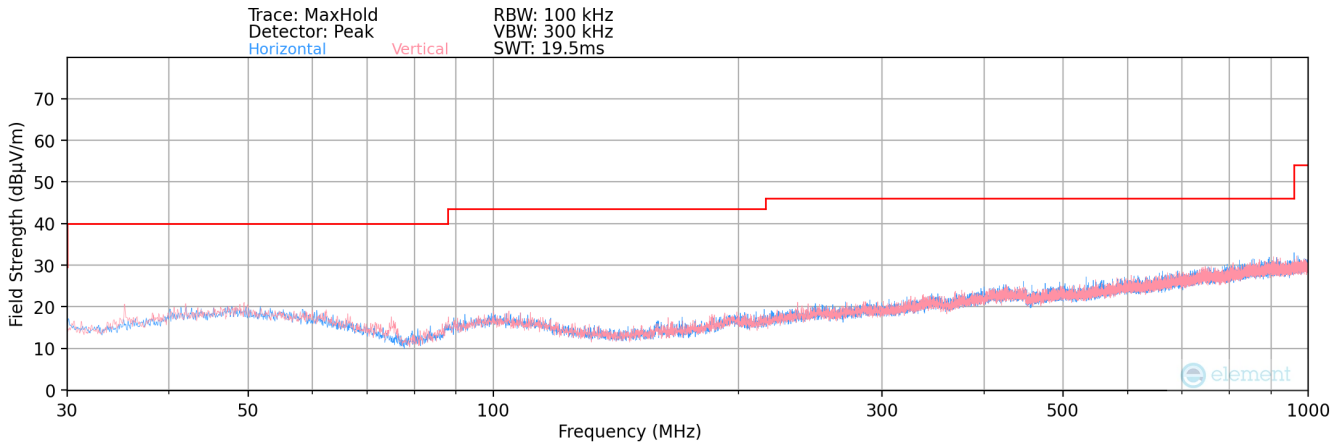

**Plot 7-153. Radiated Spurious Plot below 1GHz SISO ANT1**

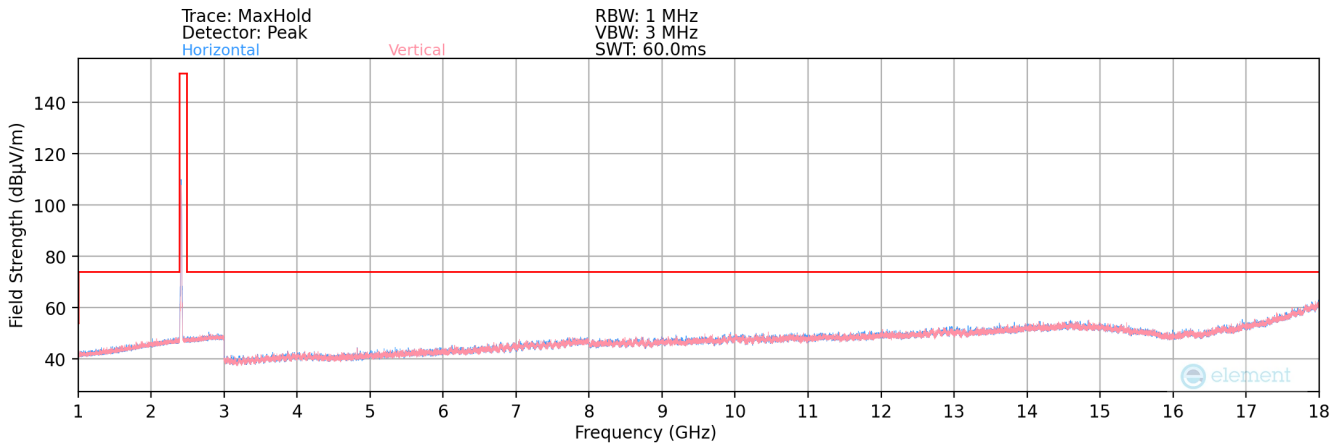


**Plot 7-154. Radiated Spurious Plot above 1GHz SISO ANT1 (802.11b – Ch. 1)**

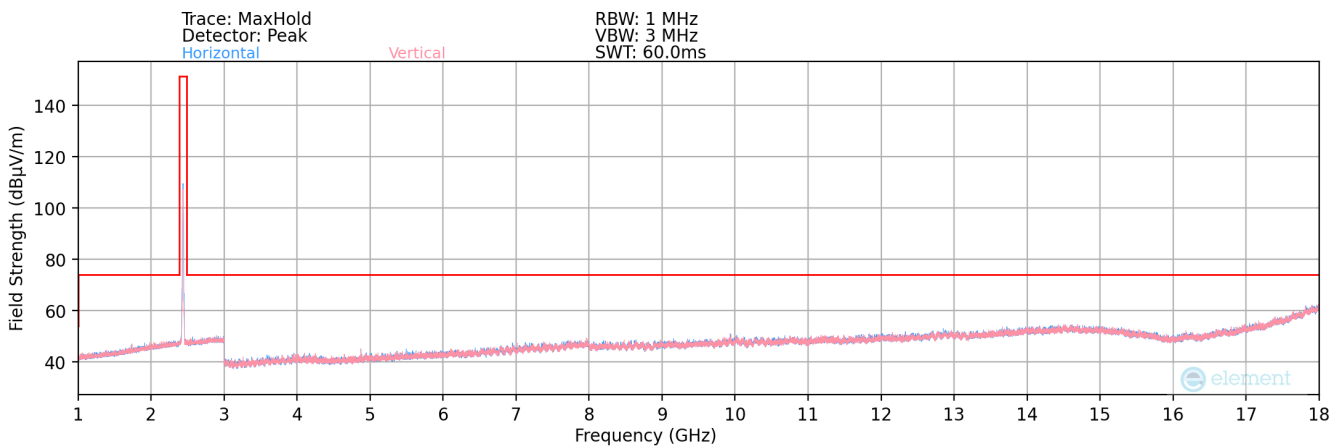


**Plot 7-155. Radiated Spurious Plot above 1GHz SISO ANT1 (802.11b – Ch. 6)**

FCC ID: A3LSMX828U	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Technical Manager
Test Report S/N: 1M2405140039-10.A3L	Test Dates: 6/10/2024 - 7/30/2024	EUT Type: Portable Tablet	Page 112 of 133

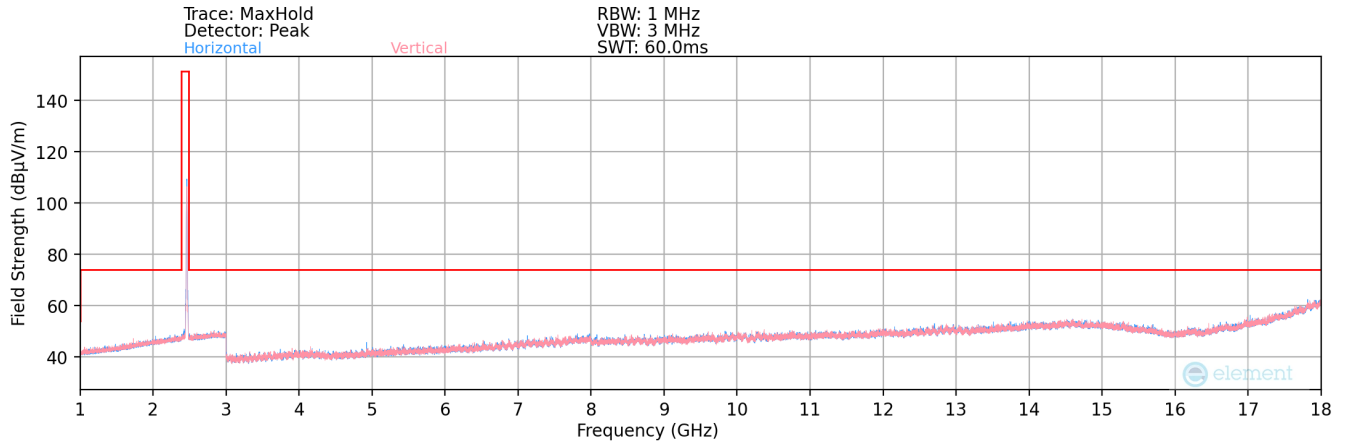

**Plot 7-156. Radiated Spurious Plot above 1GHz SISO ANT1 (802.11b – Ch. 11)**

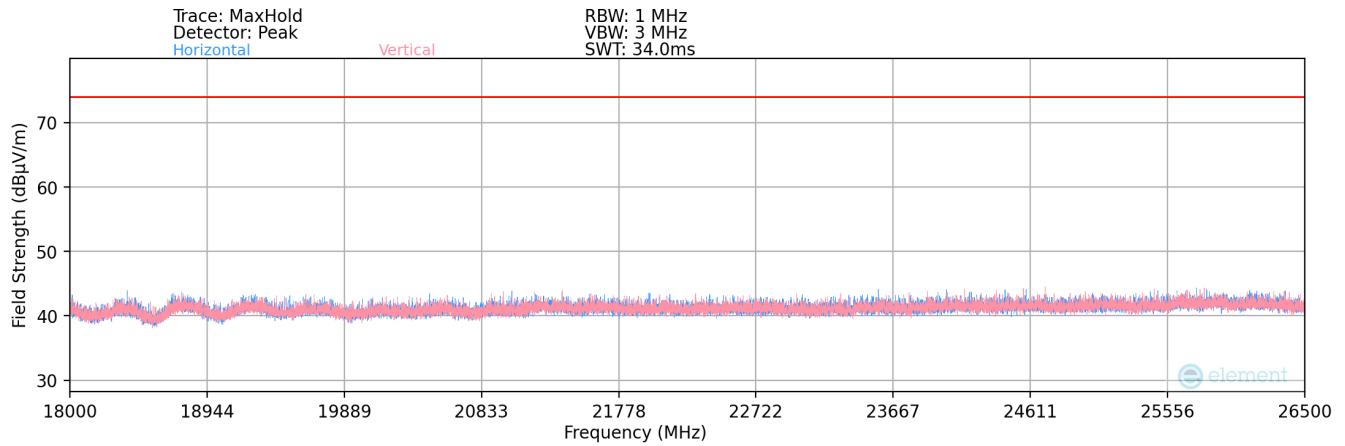

**Plot 7-157. Radiated Spurious Plot above 18GHz SISO ANT1**

FCC ID: A3LSMX828U	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Technical Manager
Test Report S/N: 1M2405140039-10.A3L	Test Dates: 6/10/2024 - 7/30/2024	EUT Type: Portable Tablet	Page 113 of 133



Worst Case Mode: 802.11b  
 Worst Case Transfer Rate: 1 Mbps  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2412MHz  
 Channel: 1

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµ V/m]	Margin [dB]
4824.00	Avg	H	100	109	-67.69	0.87	40.18	53.98	-13.79
4824.00	Peak	H	100	109	-59.84	0.87	48.03	73.98	-25.94
12060.00	Avg	H	-	-	-75.26	13.37	45.11	53.98	-8.86
12060.00	Peak	H	-	-	-65.58	13.37	54.79	73.98	-19.18

**Table 7-12. Radiated Measurements SISO ANT1**

Worst Case Mode: 802.11b  
 Worst Case Transfer Rate: 1 Mbps  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2437MHz  
 Channel: 6

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµ V/m]	Margin [dB]
4874.00	Avg	H	102	112	-67.34	0.89	40.55	53.98	-13.43
4874.00	Peak	H	102	112	-59.56	0.89	48.33	73.98	-25.65
7311.00	Avg	H	-	-	-75.72	6.35	37.63	53.98	-16.35
7311.00	Peak	H	-	-	-63.27	6.35	50.08	73.98	-23.90
12185.00	Avg	H	-	-	-75.65	12.79	44.14	53.98	-9.84
12185.00	Peak	H	-	-	-65.22	12.79	54.57	73.98	-19.41

**Table 7-13. Radiated Measurements SISO ANT1**

FCC ID: A3LSMX828U	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Technical Manager
Test Report S/N: 1M2405140039-10.A3L	Test Dates: 6/10/2024 - 7/30/2024	EUT Type: Portable Tablet	Page 114 of 133




Worst Case Mode: 802.11b  
 Worst Case Transfer Rate: 1 Mbps  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2462MHz  
 Channel: 11

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμ V/m]	Margin [dB]
4924.00	Avg	H	105	114	-66.35	1.57	42.22	53.98	-11.76
4924.00	Peak	H	105	114	-58.63	1.57	49.94	73.98	-24.04
7386.00	Avg	H	-	-	-75.28	7.06	38.78	53.98	-15.20
7386.00	Peak	H	-	-	-63.41	7.06	50.65	73.98	-23.33
12310.00	Avg	H	-	-	-76.84	13.21	43.37	53.98	-10.61
12310.00	Peak	H	-	-	-65.75	13.21	54.46	73.98	-19.52


Table 7-14. Radiated Measurements SISO ANT1

FCC ID: A3LSMX828U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2405140039-10.A3L	Test Dates: 6/10/2024 - 7/30/2024	EUT Type: Portable Tablet	Page 115 of 133


## 7.7.2 SISO Antenna-2 Radiated Spurious Emission Measurements

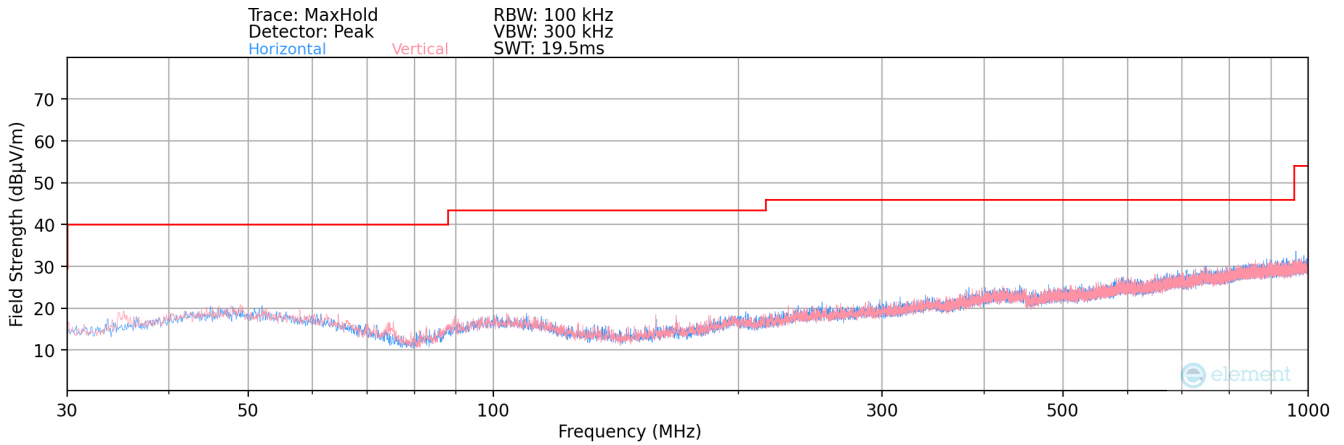

**Plot 7-158. Radiated Spurious Plot below 1GHz SISO ANT2**

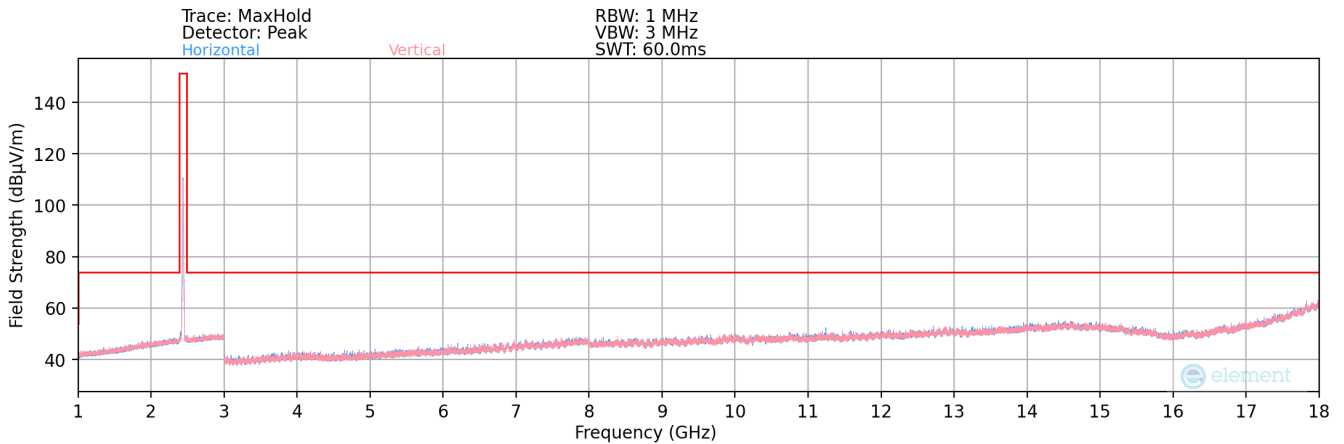


**Plot 7-159. Radiated Spurious Plot above 1GHz SISO ANT2 (802.11b – Ch. 1)**

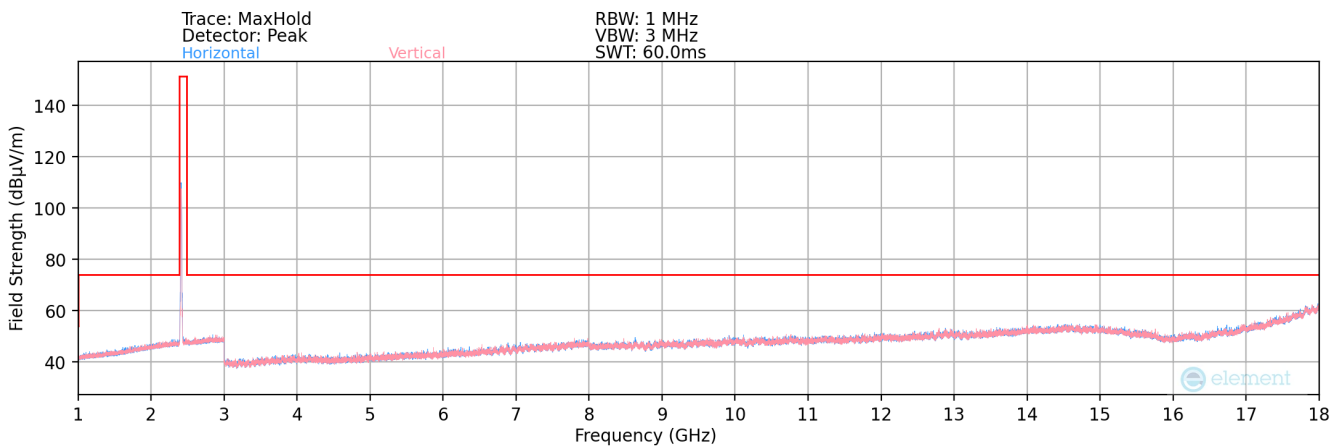


**Plot 7-160. Radiated Spurious Plot above 1GHz SISO ANT2 (802.11b – Ch. 6)**

FCC ID: A3LSMX828U	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Technical Manager
Test Report S/N: 1M2405140039-10.A3L	Test Dates: 6/10/2024 - 7/30/2024	EUT Type: Portable Tablet	Page 116 of 133

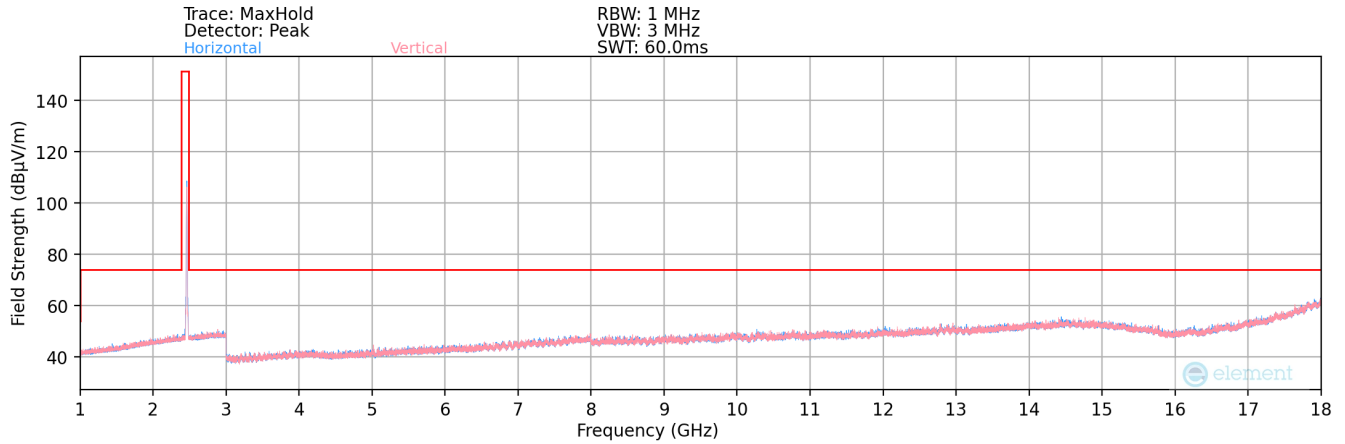

**Plot 7-161. Radiated Spurious Plot above 1GHz SISO ANT2 (802.11b – Ch. 11)**

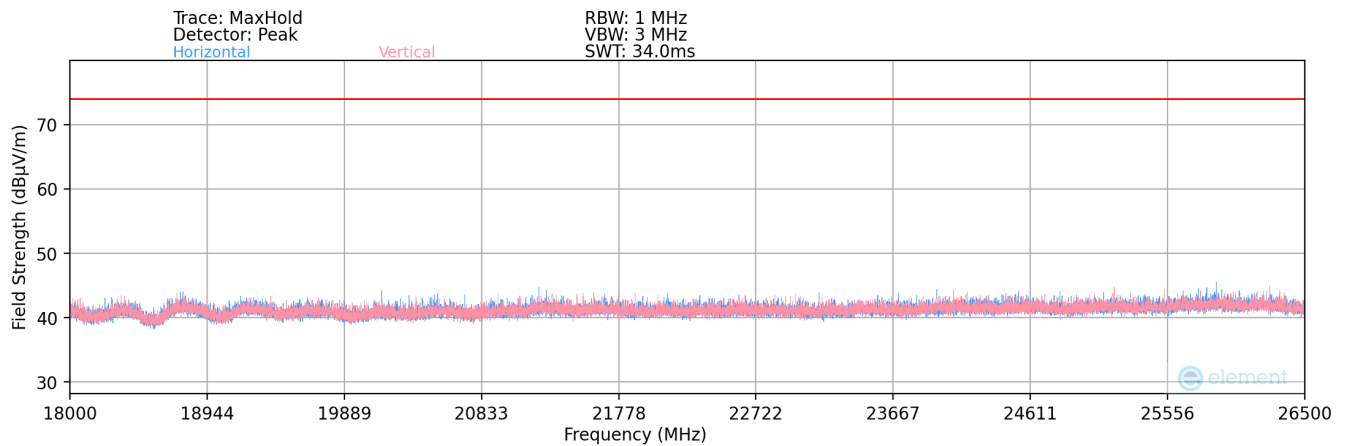

**Plot 7-162. Radiated Spurious Plot above 18GHz SISO ANT2**

FCC ID: A3LSMX828U	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Technical Manager
Test Report S/N: 1M2405140039-10.A3L	Test Dates: 6/10/2024 - 7/30/2024	EUT Type: Portable Tablet	Page 117 of 133





Worst Case Mode: 802.11b  
 Worst Case Transfer Rate: 1 Mbps  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2412MHz  
 Channel: 1

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµ V/m]	Margin [dB]
4824.00	Avg	H	101	108	-68.53	0.87	39.34	53.98	-14.63
4824.00	Peak	H	101	108	-58.38	0.87	49.49	73.98	-24.48
12060.00	Avg	H	-	-	-75.13	13.37	45.24	53.98	-8.73
12060.00	Peak	H	-	-	-65.41	13.37	54.96	73.98	-19.01

**Table 7-15. Radiated Measurements SISO ANT2**

Worst Case Mode: 802.11b  
 Worst Case Transfer Rate: 1 Mbps  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2437MHz  
 Channel: 6

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµ V/m]	Margin [dB]
4874.00	Avg	H	103	110	-70.24	0.89	37.65	53.98	-16.33
4874.00	Peak	H	103	110	-59.79	0.89	48.10	73.98	-25.88
7311.00	Avg	H	-	-	-75.11	6.35	38.24	53.98	-15.74
7311.00	Peak	H	-	-	-63.07	6.35	50.28	73.98	-23.70
12185.00	Avg	H	-	-	-75.71	12.79	44.08	53.98	-9.90
12185.00	Peak	H	-	-	-65.13	12.79	54.66	73.98	-19.32

**Table 7-16. Radiated Measurements SISO ANT2**

FCC ID: A3LSMX828U	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Technical Manager
Test Report S/N: 1M2405140039-10.A3L	Test Dates: 6/10/2024 - 7/30/2024	EUT Type: Portable Tablet	Page 118 of 133




Worst Case Mode: 802.11b  
 Worst Case Transfer Rate: 1 Mbps  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2462MHz  
 Channel: 11

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
4924.00	Avg	H	104	107	-68.24	1.57	40.33	53.98	-13.65
4924.00	Peak	H	104	107	-58.84	1.57	49.73	73.98	-24.25
7386.00	Avg	H	-	-	-75.03	7.06	39.03	53.98	-14.95
7386.00	Peak	H	-	-	-63.47	7.06	50.59	73.98	-23.39
12310.00	Avg	H	-	-	-76.51	13.21	43.70	53.98	-10.28
12310.00	Peak	H	-	-	-65.84	13.21	54.37	73.98	-19.61


**Table 7-17. Radiated Measurements SISO ANT2**

FCC ID: A3LSMX828U	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Technical Manager
Test Report S/N: 1M2405140039-10.A3L	Test Dates: 6/10/2024 - 7/30/2024	EUT Type: Portable Tablet	Page 119 of 133


### 7.7.3 MIMO Radiated Spurious Emission Measurements

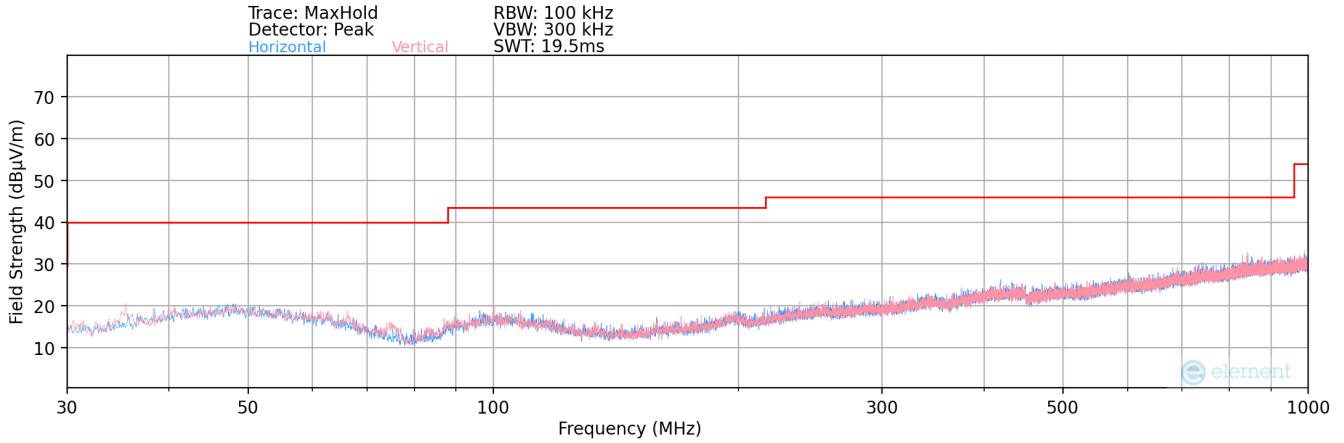

**Plot 7-163. Radiated Spurious Plot below 1GHz MIMO**

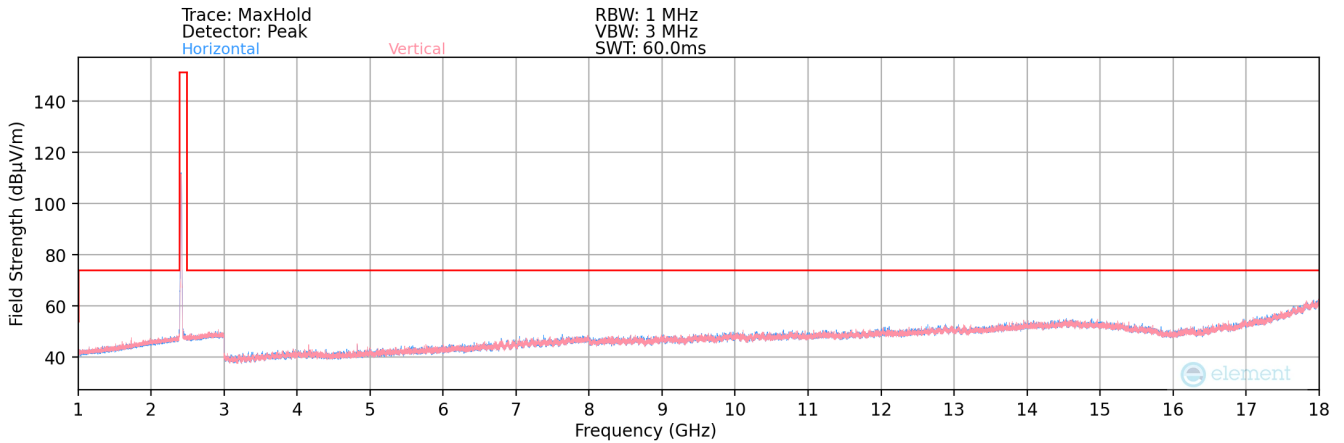


**Plot 7-164. Radiated Spurious Plot above 1GHz MIMO (802.11b – Ch. 1)**

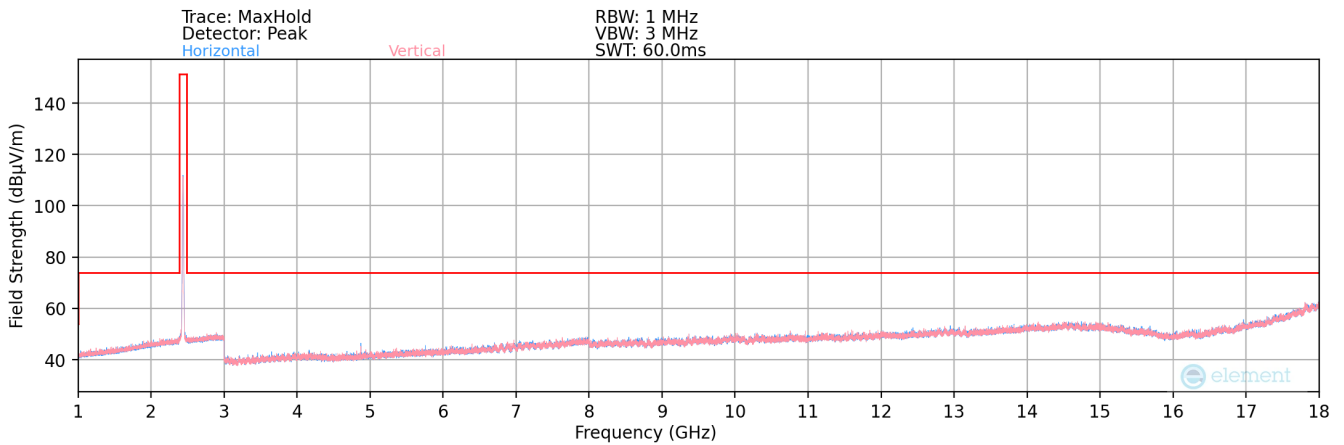


**Plot 7-165. Radiated Spurious Plot above 1GHz MIMO (802.11b – Ch. 6)**

FCC ID: A3LSMX828U	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Technical Manager
Test Report S/N: 1M2405140039-10.A3L	Test Dates: 6/10/2024 - 7/30/2024	EUT Type: Portable Tablet	Page 120 of 133

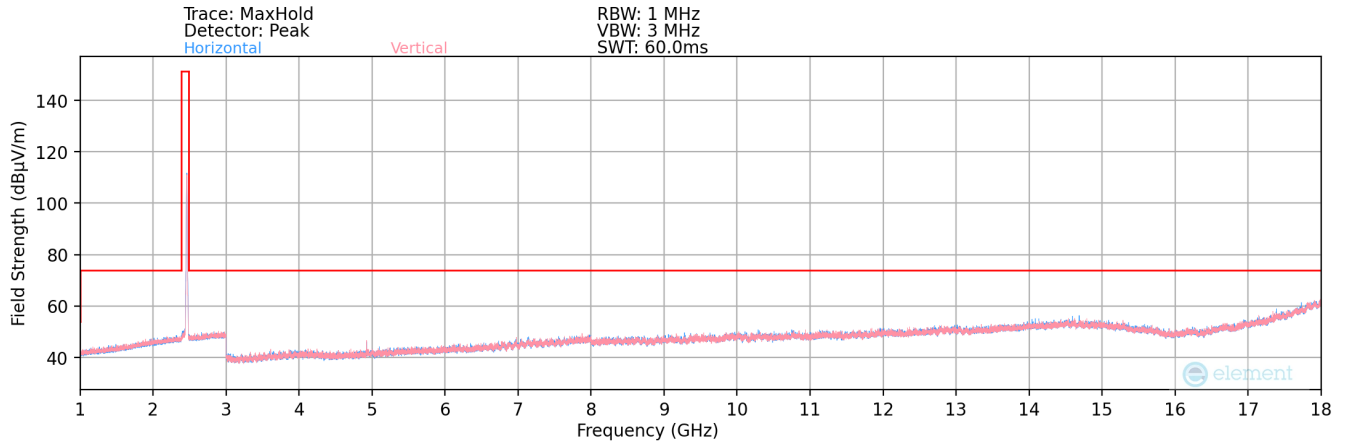

**Plot 7-166. Radiated Spurious Plot above 1GHz MIMO (802.11b – Ch. 11)**

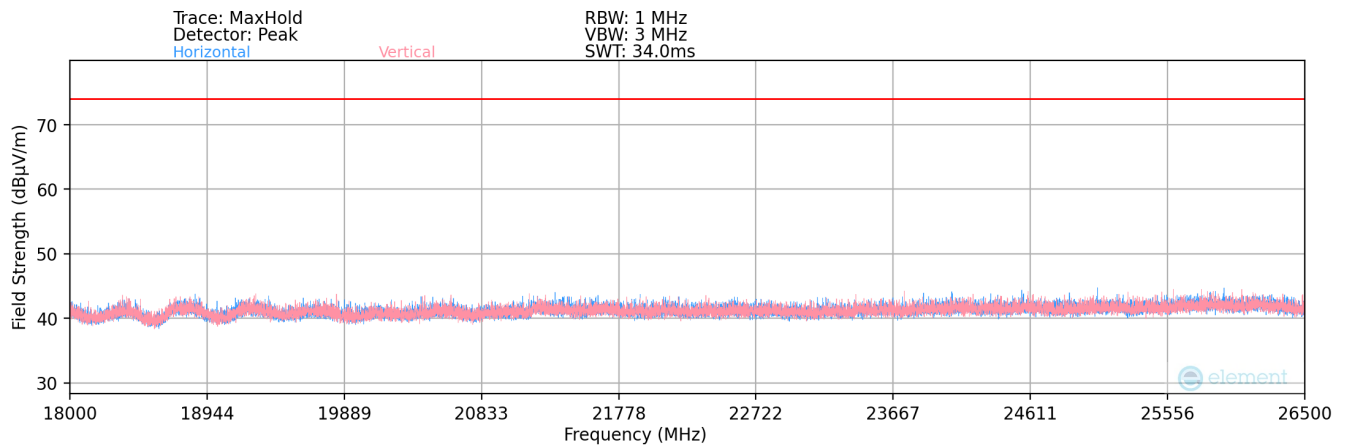

**Plot 7-167. Radiated Spurious Plot above 18GHz MIMO**

FCC ID: A3LSMX828U	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Technical Manager
Test Report S/N: 1M2405140039-10.A3L	Test Dates: 6/10/2024 - 7/30/2024	EUT Type: Portable Tablet	Page 121 of 133



Worst Case Mode: 802.11b  
 Worst Case Transfer Rate: 1 Mbps  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2412MHz  
 Channel: 1

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4824.00	Avg	H	104	111	-66.15	0.87	41.72	53.98	-12.25
4824.00	Peak	H	104	111	-60.38	0.87	47.49	73.98	-26.48
12060.00	Avg	H	-	-	-75.12	13.37	45.25	53.98	-8.72
12060.00	Peak	H	-	-	-65.61	13.37	54.76	73.98	-19.21

**Table 7-18. Radiated Measurements MIMO**

Worst Case Mode: 802.11b  
 Worst Case Transfer Rate: 1 Mbps  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2437MHz  
 Channel: 6

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4874.00	Avg	H	101	112	-65.85	0.89	42.04	53.98	-11.94
4874.00	Peak	H	101	112	-59.81	0.89	48.08	73.98	-25.90
7311.00	Avg	H	-	-	-75.87	6.35	37.48	53.98	-16.50
7311.00	Peak	H	-	-	-63.64	6.35	49.71	73.98	-24.27
12185.00	Avg	H	-	-	-75.88	12.79	43.91	53.98	-10.07
12185.00	Peak	H	-	-	-65.08	12.79	54.71	73.98	-19.27

**Table 7-19. Radiated Measurements MIMO**

FCC ID: A3LSMX828U	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Technical Manager
Test Report S/N: 1M2405140039-10.A3L	Test Dates: 6/10/2024 - 7/30/2024	EUT Type: Portable Tablet	Page 122 of 133

Worst Case Mode: 802.11b  
 Worst Case Transfer Rate: 1 Mbps  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2462MHz  
 Channel: 11

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4924.00	Avg	H	102	110	-63.86	1.57	44.71	53.98	-9.27
4924.00	Peak	H	102	110	-59.17	1.57	49.40	73.98	-24.58
7386.00	Avg	H	-	-	-75.36	7.06	38.70	53.98	-15.28
7386.00	Peak	H	-	-	-63.75	7.06	50.31	73.98	-23.67
12310.00	Avg	H	-	-	-76.12	13.21	44.09	53.98	-9.89
12310.00	Peak	H	-	-	-65.48	13.21	54.73	73.98	-19.25

**Table 7-20. Radiated Measurements MIMO**

FCC ID: A3LSMX828U	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Technical Manager
Test Report S/N: 1M2405140039-10.A3L	Test Dates: 6/10/2024 - 7/30/2024	EUT Type: Portable Tablet	Page 123 of 133