



Plot 7-213. Power Spectral Density Plot MIMO ANT1 (20MHz BW 802.11ax – Full Tones (UNII Band 3) – Ch. 149)

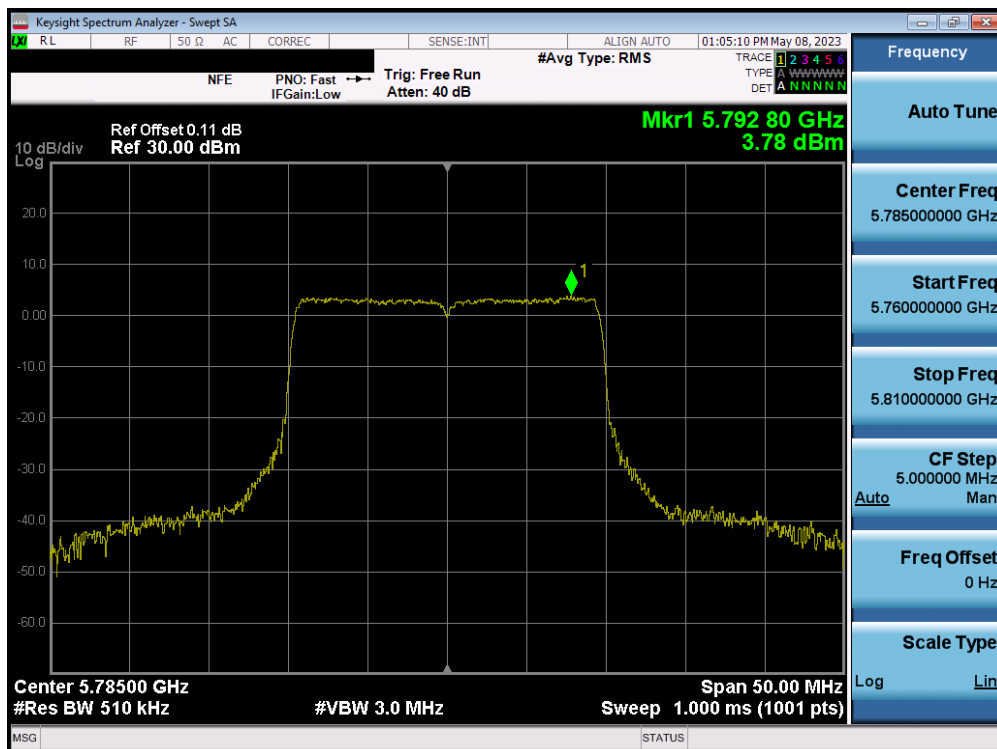


Plot 7-214. Power Spectral Density Plot MIMO ANT1 (20MHz BW 802.11ax – Full Tones (UNII Band 3) – Ch. 157)

FCC ID: A3LSMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-07.A3L	Test Dates: 04/03/2023 - 05/12/2023	EUT Type: Portable Tablet	Page 142 of 235

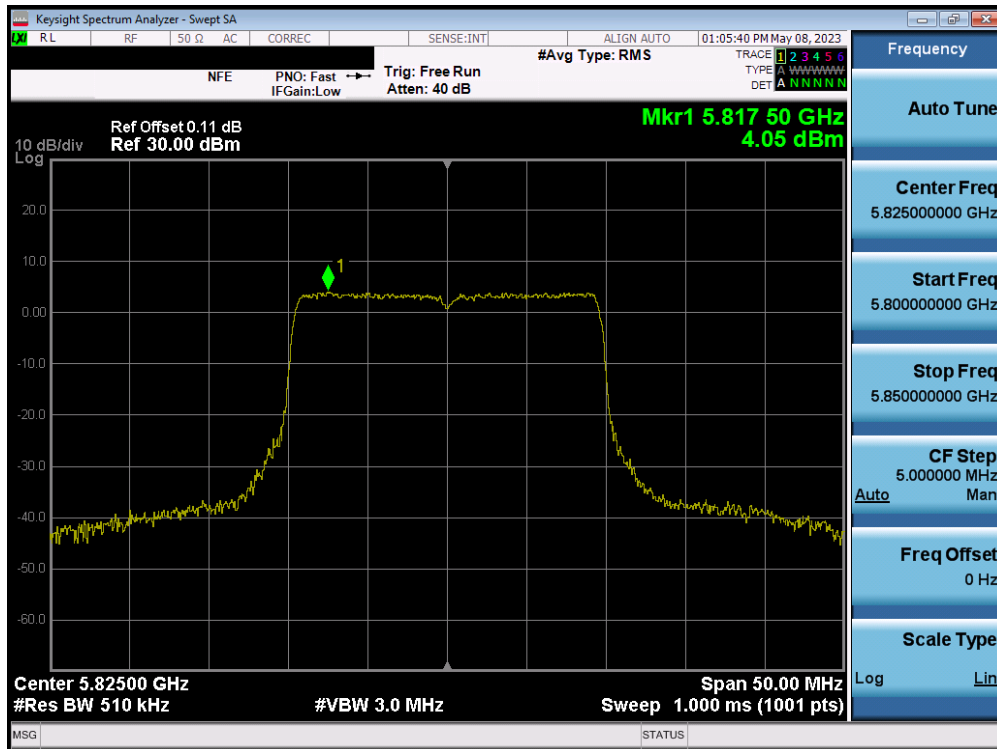


Plot 7-215. Power Spectral Density Plot MIMO ANT1 (20MHz BW 802.11ax – Full Tones (UNII Band 3) – Ch. 165)

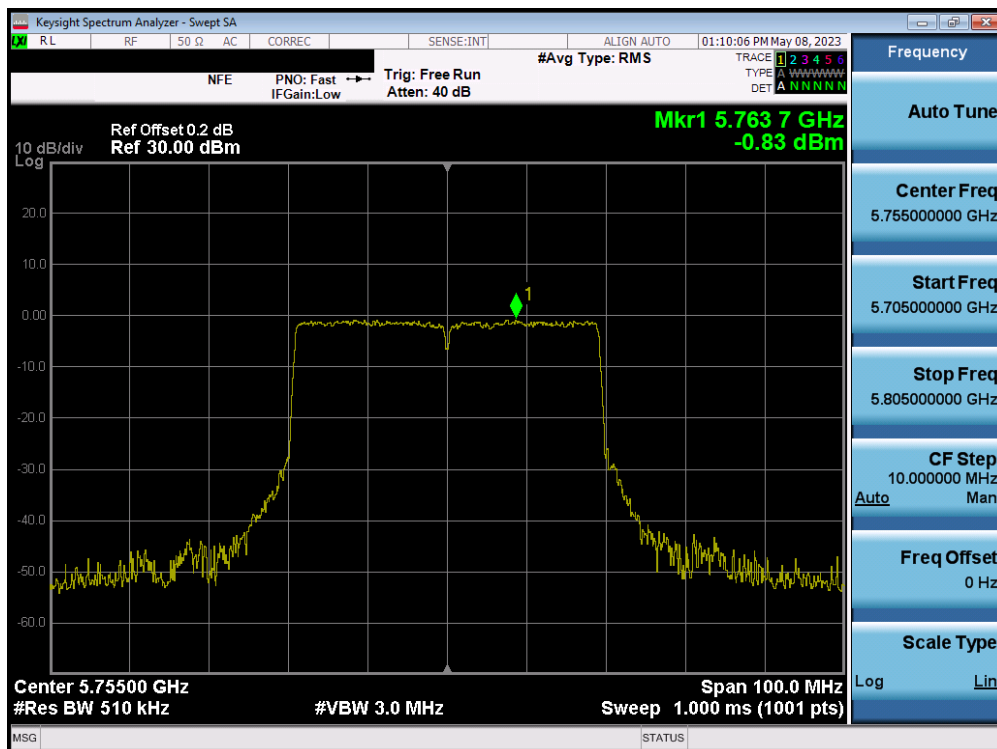


Plot 7-216. Power Spectral Density Plot MIMO ANT1 (40MHz BW 802.11ax – Full Tones (UNII Band 3) – Ch. 151)

FCC ID: A3LSMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-07.A3L	Test Dates: 04/03/2023 - 05/12/2023	EUT Type: Portable Tablet	Page 143 of 235

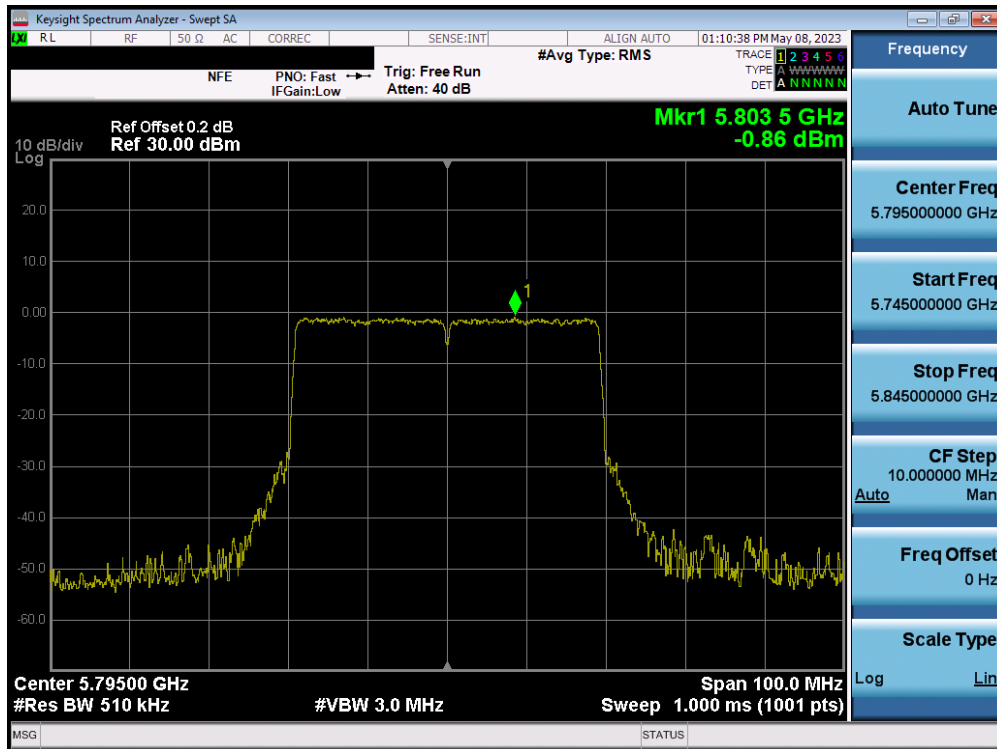


Plot 7-217. Power Spectral Density Plot MIMO ANT1 (40MHz BW 802.11ax – Full Tones (UNII Band 3) – Ch. 159)

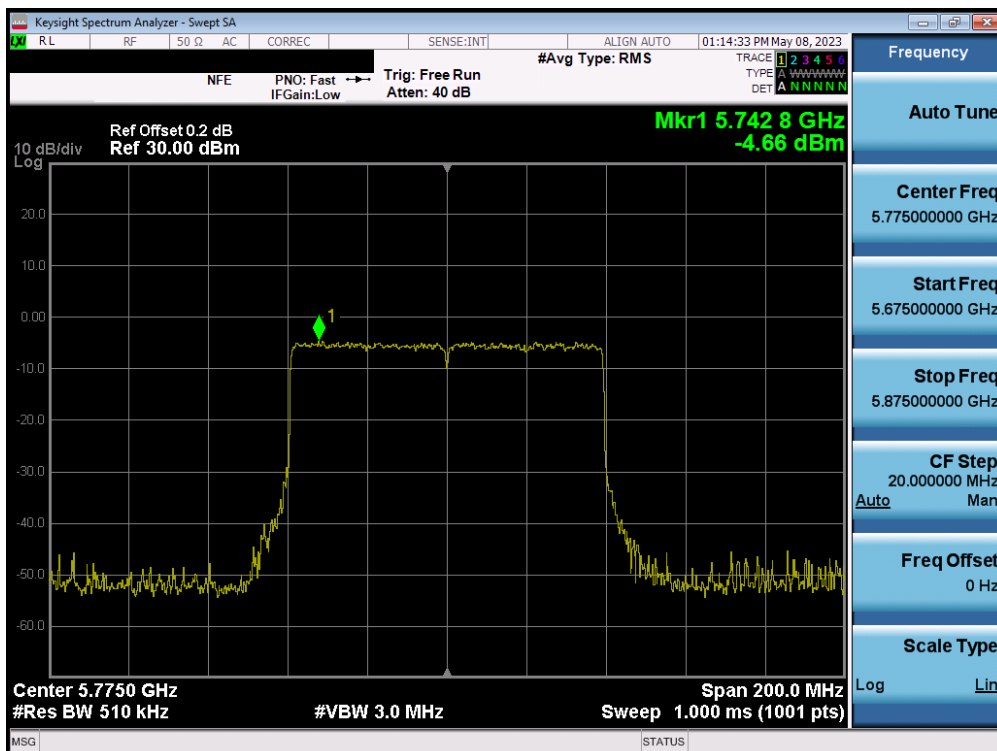


Plot 7-218. Power Spectral Density Plot MIMO ANT1 (80MHz BW 802.11ax – Full Tones (UNII Band 3) – Ch. 155)

FCC ID: A3LSMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-07.A3L	Test Dates: 04/03/2023 - 05/12/2023	EUT Type: Portable Tablet	Page 144 of 235

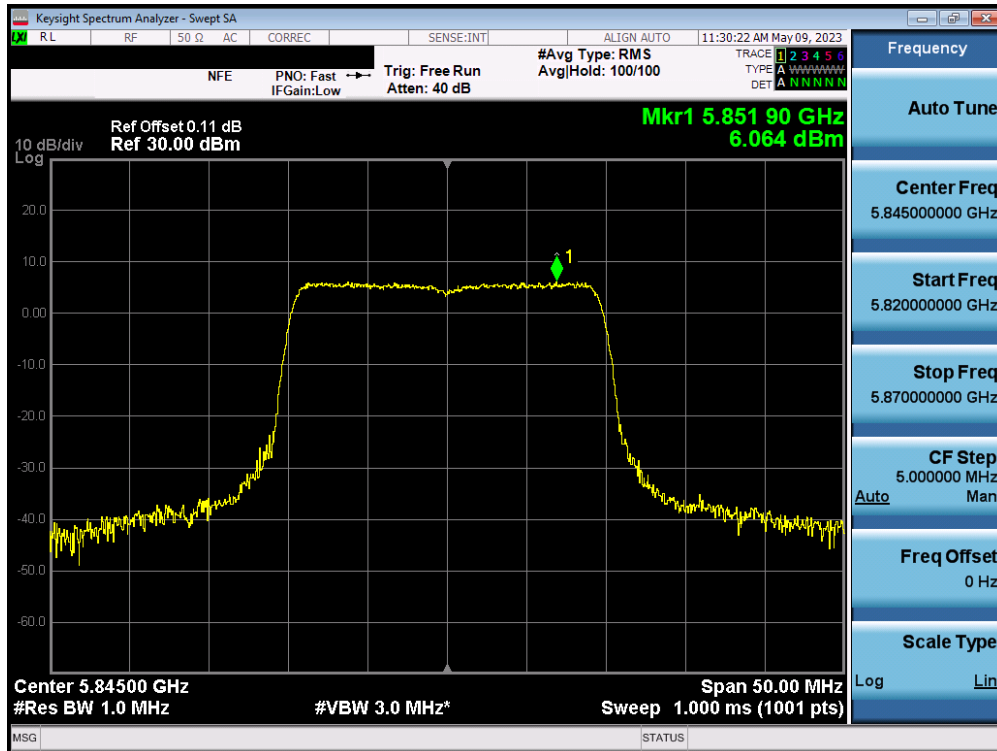


Plot 7-219. Power Spectral Density Plot MIMO ANT1 (20MHz BW 802.11ax – Full Tones (UNII Band 3/4) – Ch. 169)

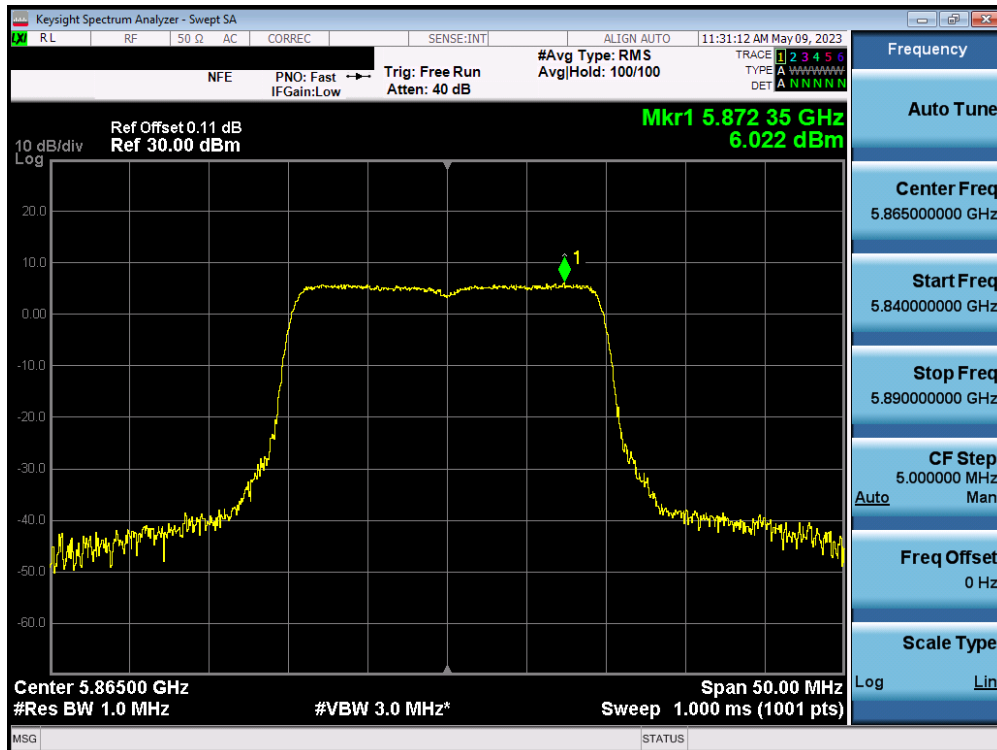


Plot 7-220. Power Spectral Density Plot MIMO ANT1 (20MHz BW 802.11ax – Full Tones (UNII Band 4) – Ch. 173)

FCC ID: A3LSMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-07.A3L	Test Dates: 04/03/2023 - 05/12/2023	EUT Type: Portable Tablet	Page 145 of 235

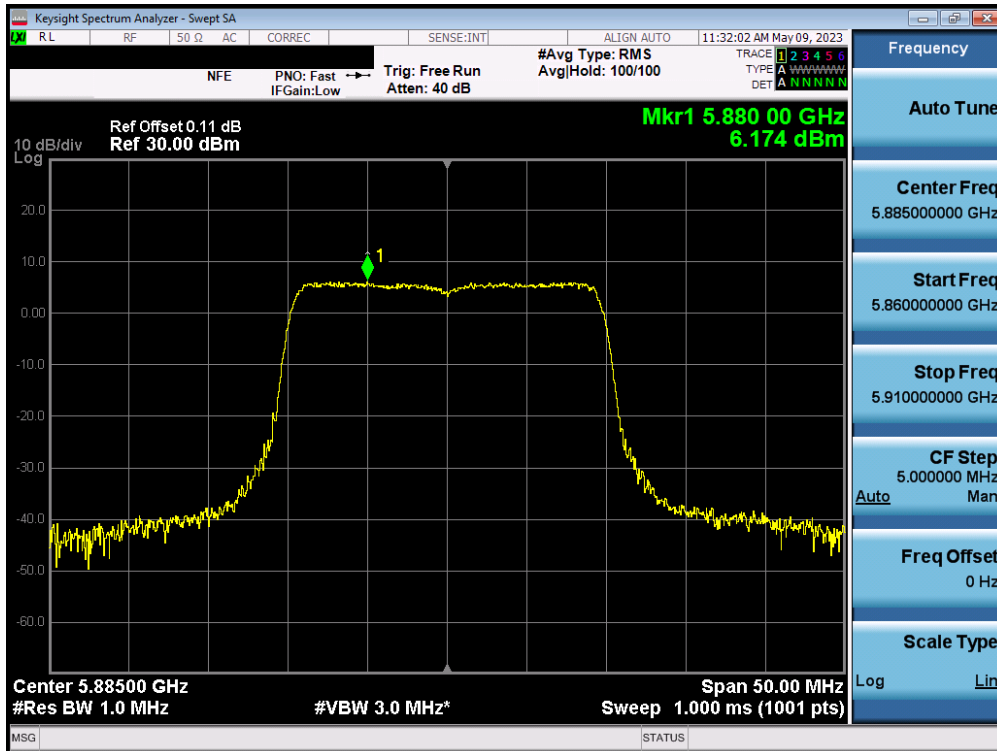


Plot 7-221. Power Spectral Density Plot MIMO ANT1 (20MHz BW 802.11ax – Full Tones (UNII Band 4) – Ch. 177)

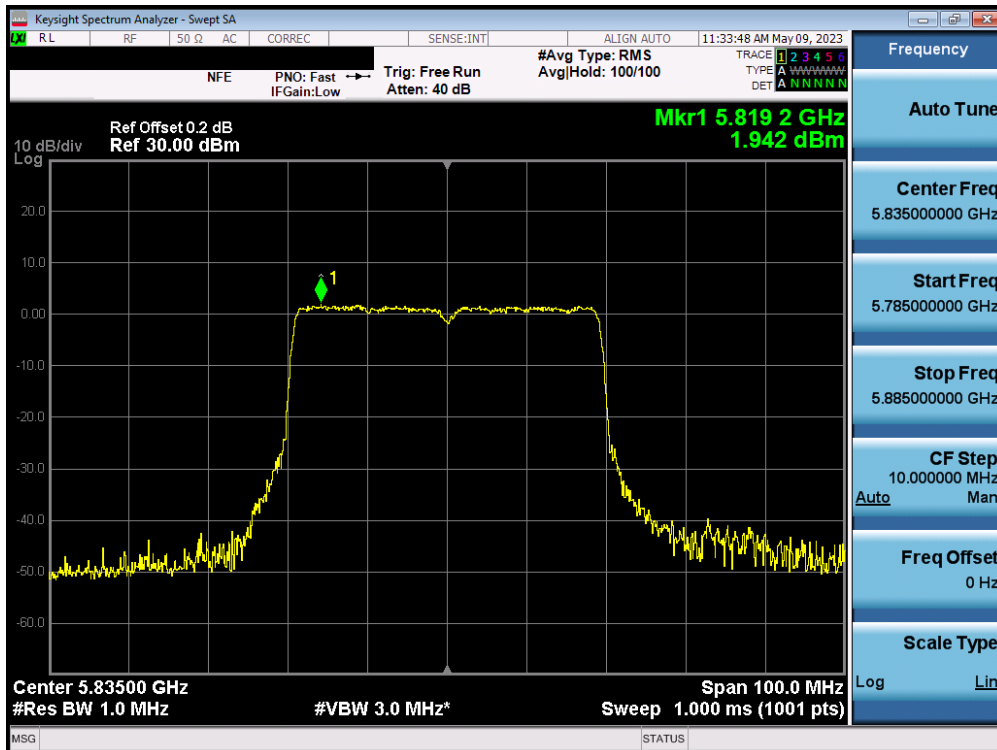


Plot 7-222. Power Spectral Density Plot MIMO ANT1 (40MHz BW 802.11ax – Full Tones (UNII Band 3/4) – Ch. 167)

FCC ID: A3LSMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-07.A3L	Test Dates: 04/03/2023 - 05/12/2023	EUT Type: Portable Tablet	Page 146 of 235

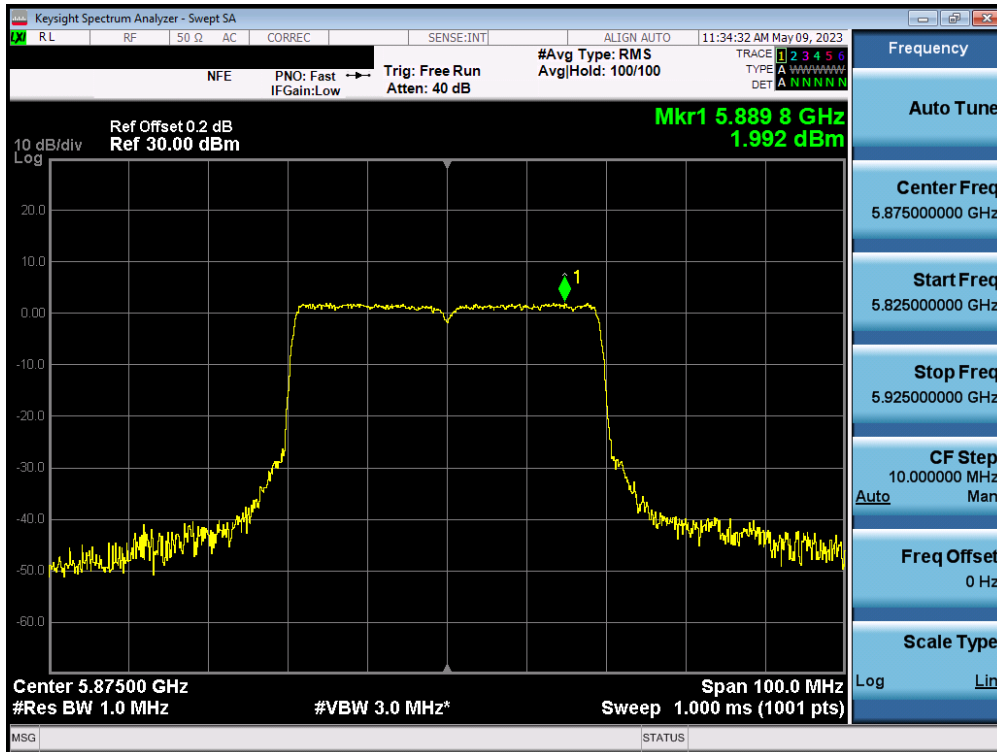


Plot 7-223. Power Spectral Density Plot MIMO ANT1 (40MHz BW 802.11ax – Full Tones (UNII Band 4) – Ch. 175)

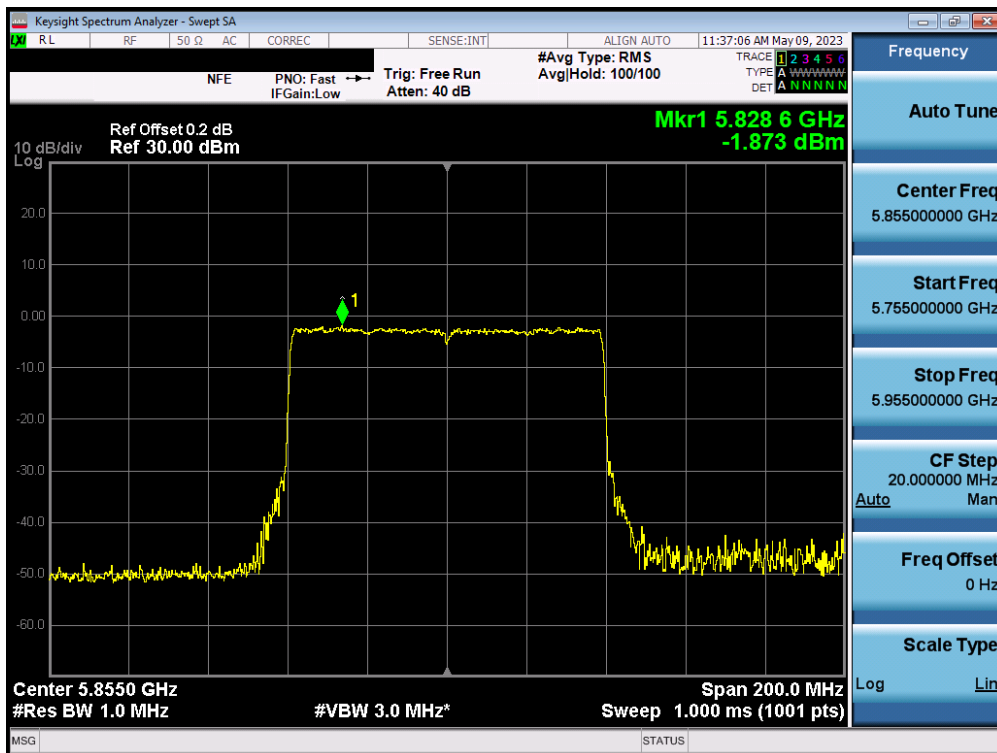

Plot 7-224. Power Spectral Density Plot MIMO ANT1 (80MHz BW 802.11ax – Full Tones (UNII Band 3/4) – Ch. 171)


FCC ID: A3LSMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-07.A3L	Test Dates: 04/03/2023 - 05/12/2023	EUT Type: Portable Tablet	Page 147 of 235

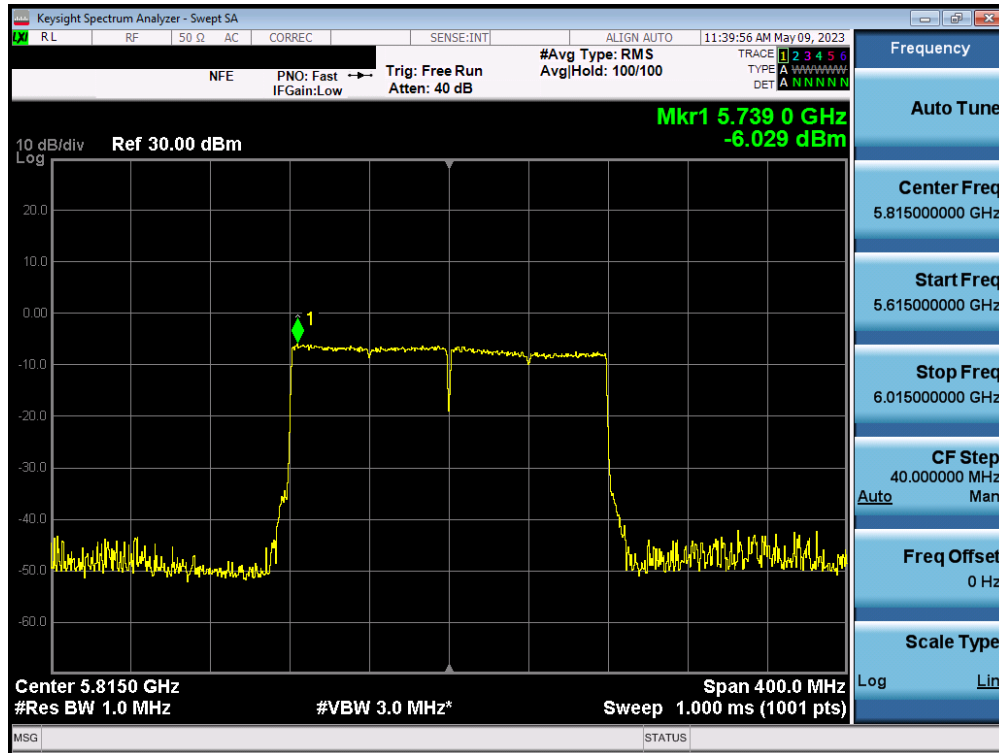


Plot 7-225. Power Spectral Density Plot MIMO ANT1 (160MHz BW 802.11ax – Full Tones (UNII Band 3/4) – Ch. 163)

FCC ID: A3LSMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-07.A3L	Test Dates: 04/03/2023 - 05/12/2023	EUT Type: Portable Tablet	Page 148 of 235

7.5.2 MIMO Antenna-2 Power Spectral Density Measurements

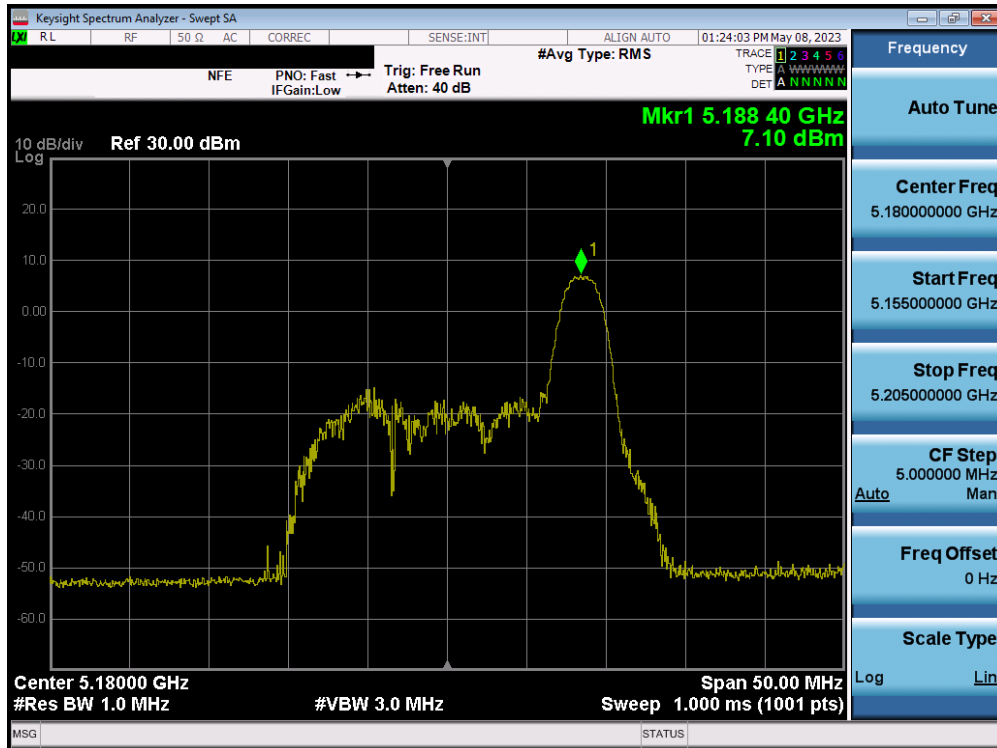


Plot 7-226. Power Spectral Density Plot MIMO ANT2 (20MHz BW 802.11ax – 26 Tones (UNII Band 1) – Ch. 36)

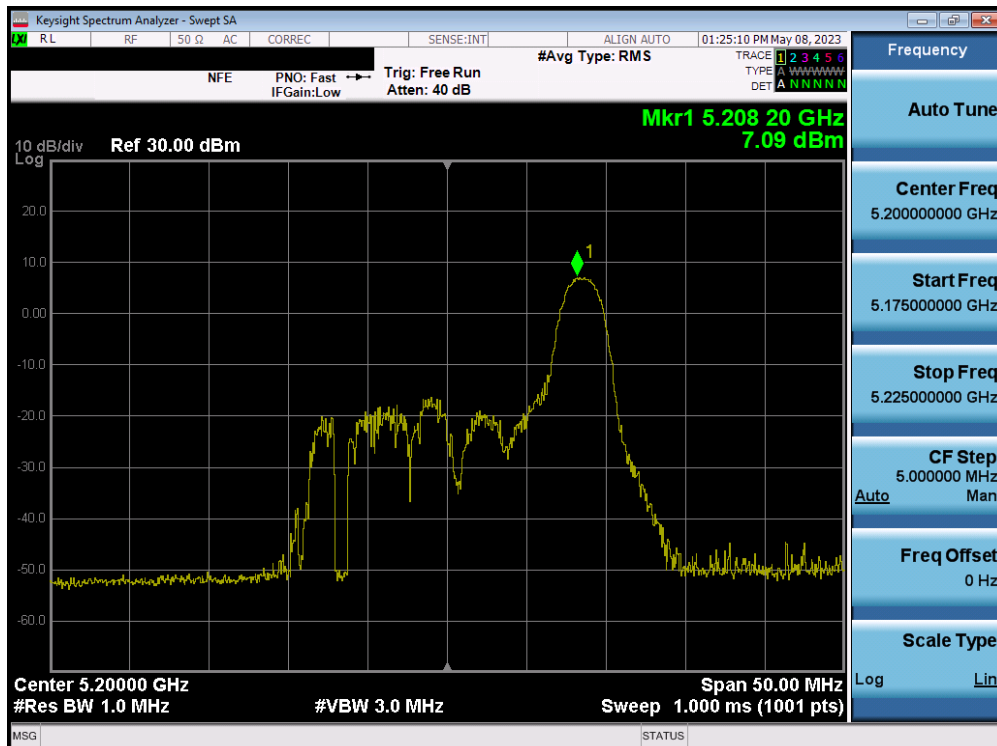


Plot 7-227. Power Spectral Density Plot MIMO ANT2 (20MHz BW 802.11ax – 26 Tones (UNII Band 1) – Ch. 40)

FCC ID: A3LSMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-07.A3L	Test Dates: 04/03/2023 - 05/12/2023	EUT Type: Portable Tablet	Page 149 of 235

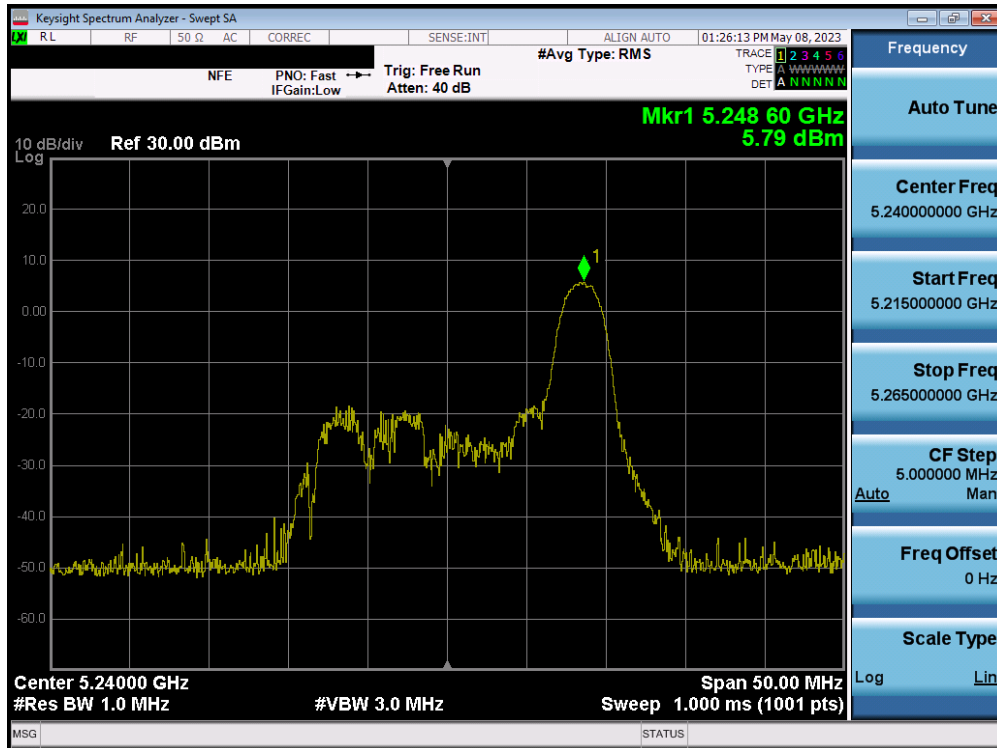


Plot 7-228. Power Spectral Density Plot MIMO ANT2 (20MHz BW 802.11ax – 26 Tones (UNII Band 1) – Ch. 48)

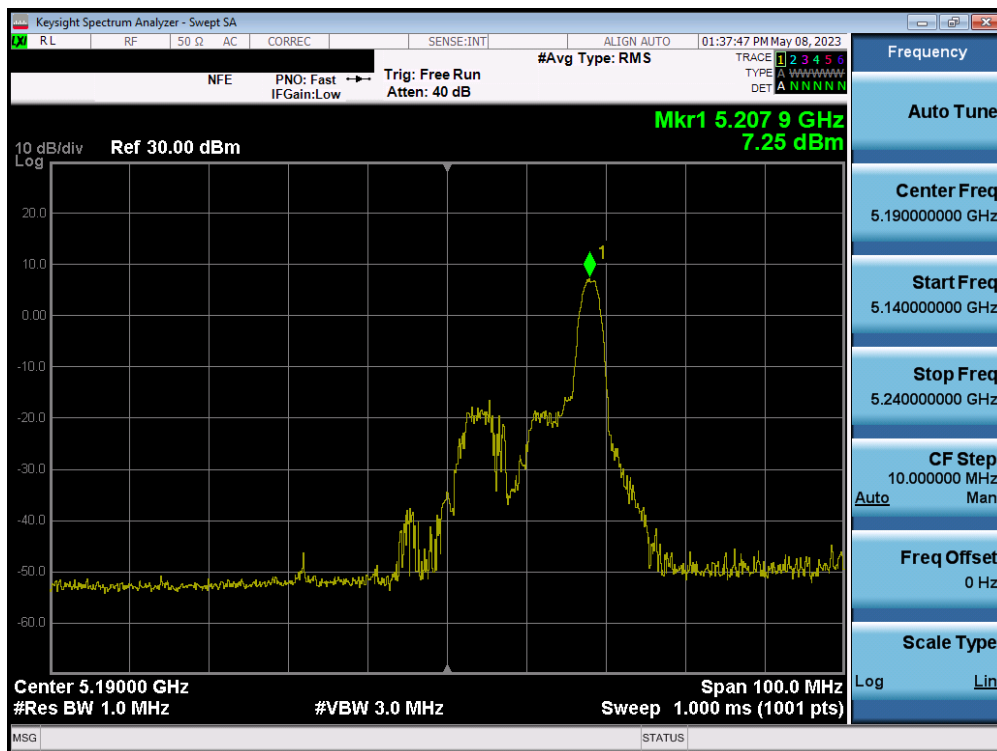


Plot 7-229. Power Spectral Density Plot MIMO ANT2 (40MHz BW 802.11ax – 26 Tones (UNII Band 1) – Ch. 38)

FCC ID: A3LSMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-07.A3L	Test Dates: 04/03/2023 - 05/12/2023	EUT Type: Portable Tablet	Page 150 of 235

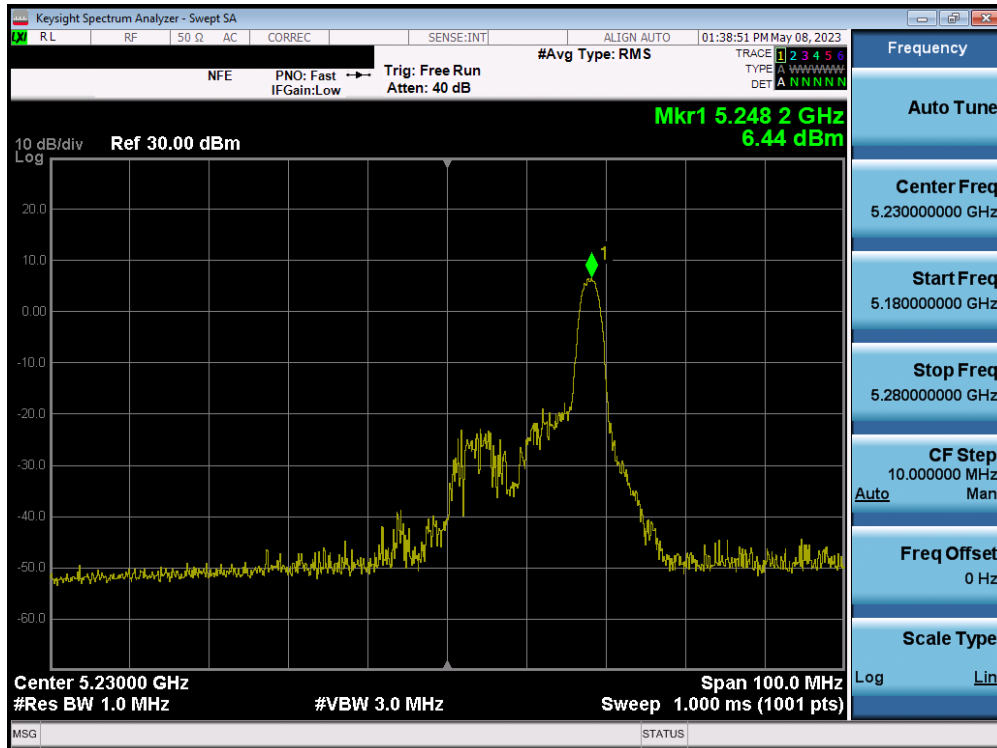


Plot 7-230. Power Spectral Density Plot MIMO ANT2 (40MHz BW 802.11ax – 26 Tones (UNII Band 1) – Ch. 46)

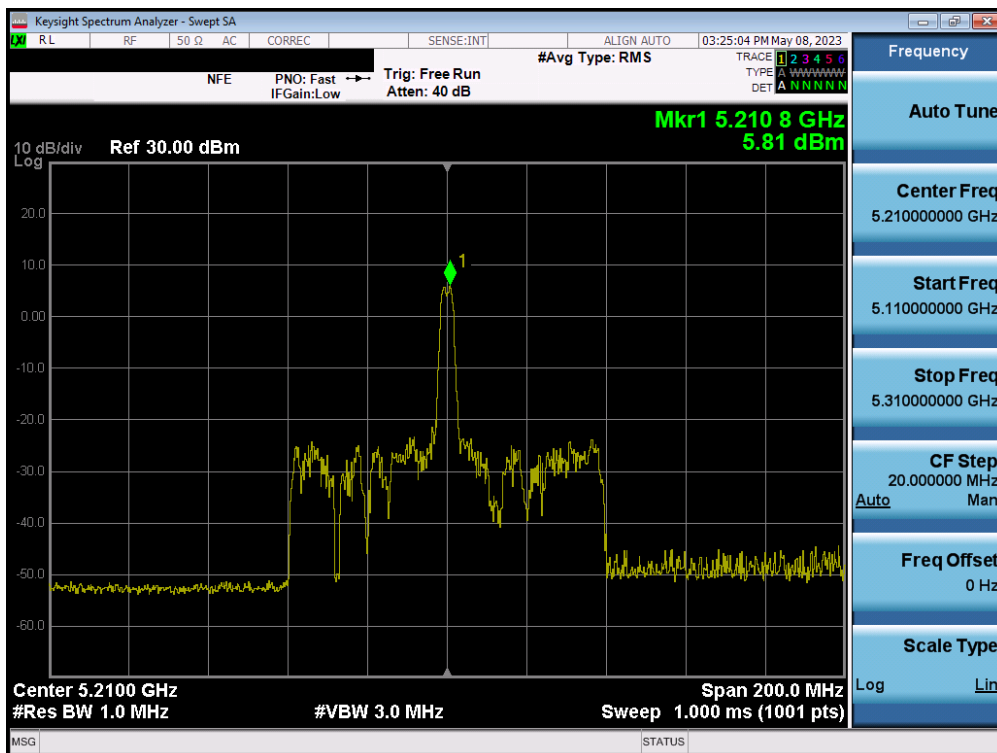


Plot 7-231. Power Spectral Density Plot MIMO ANT2 (80MHz BW 802.11ax – 26 Tones (UNII Band 1) – Ch. 42)

FCC ID: A3LSMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-07.A3L	Test Dates: 04/03/2023 - 05/12/2023	EUT Type: Portable Tablet	Page 151 of 235

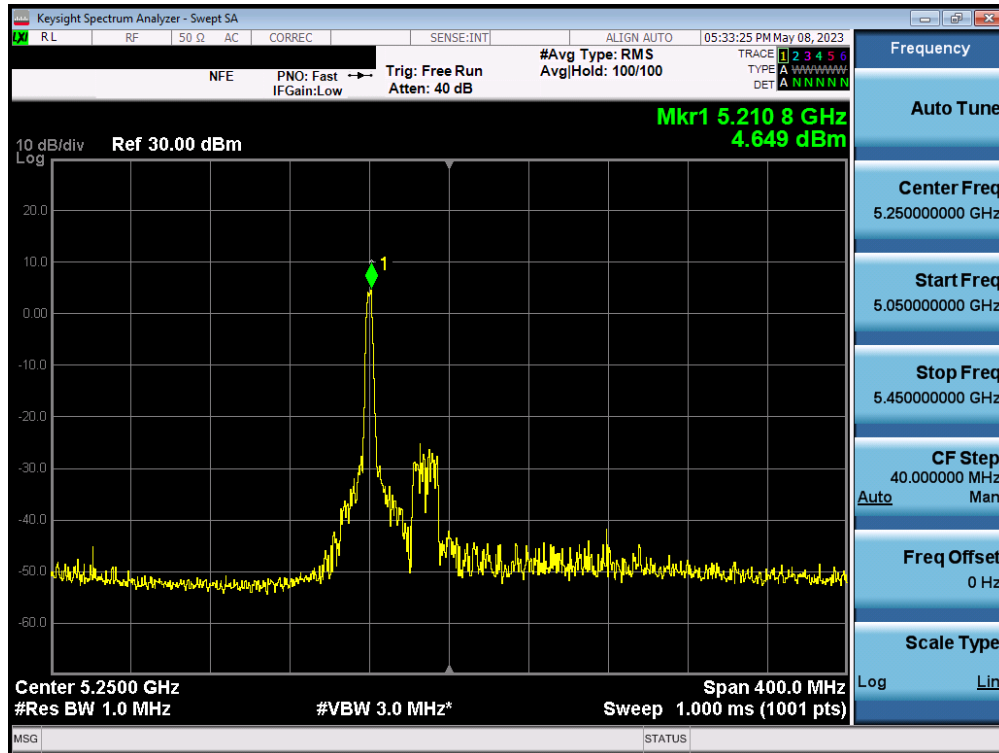


Plot 7-232. Power Spectral Density Plot MIMO ANT2 (160MHz(L) BW 802.11ax – 26 Tones (UNII Band 1/2A) – Ch. 50)

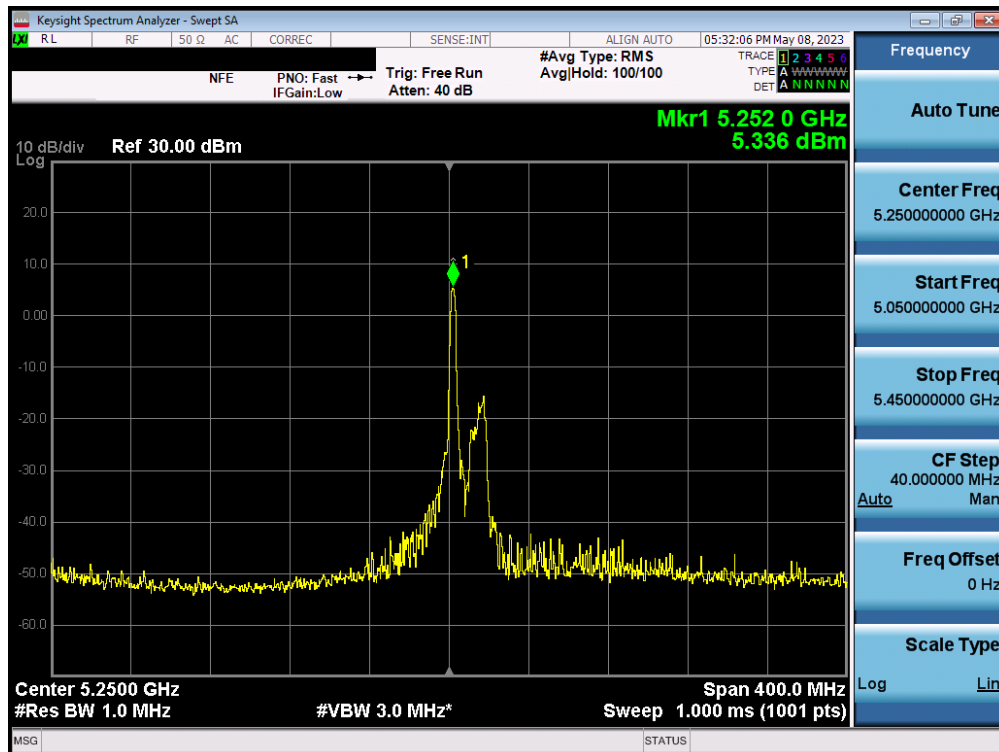


Plot 7-233. Power Spectral Density Plot MIMO ANT2 (160MHz(U) BW 802.11ax – 26 Tones (UNII Band 1/2A) – Ch. 50)

FCC ID: A3LSMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-07.A3L	Test Dates: 04/03/2023 - 05/12/2023	EUT Type: Portable Tablet	Page 152 of 235

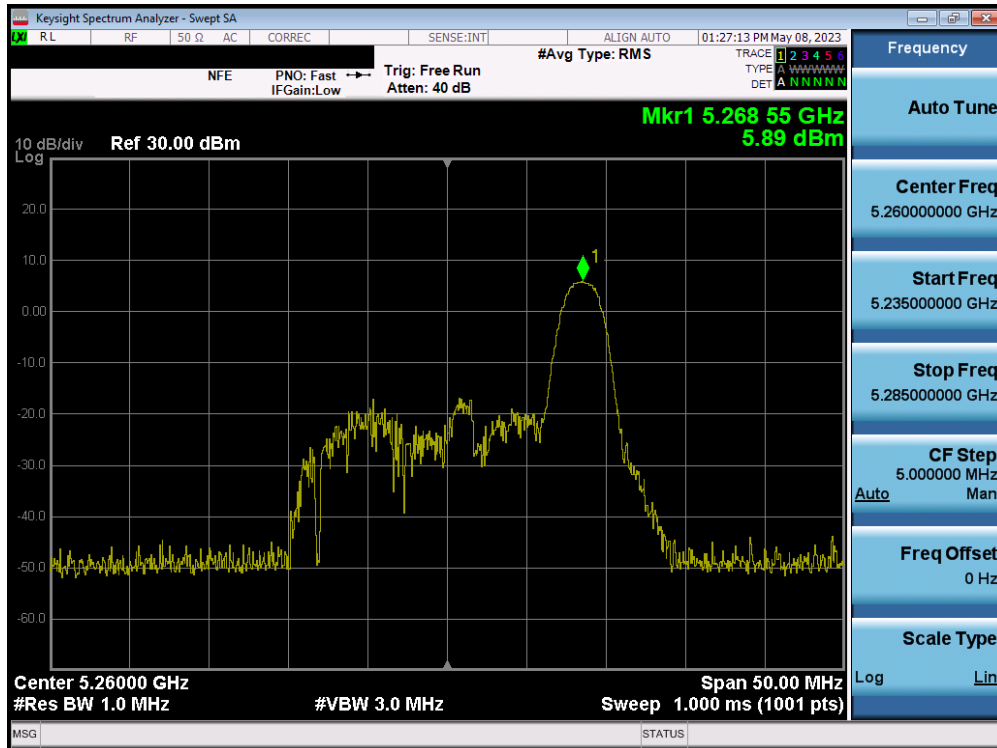


Plot 7-234. Power Spectral Density Plot MIMO ANT2 (20MHz BW 802.11ax – 26 Tones (UNII Band 2A) – Ch. 52)

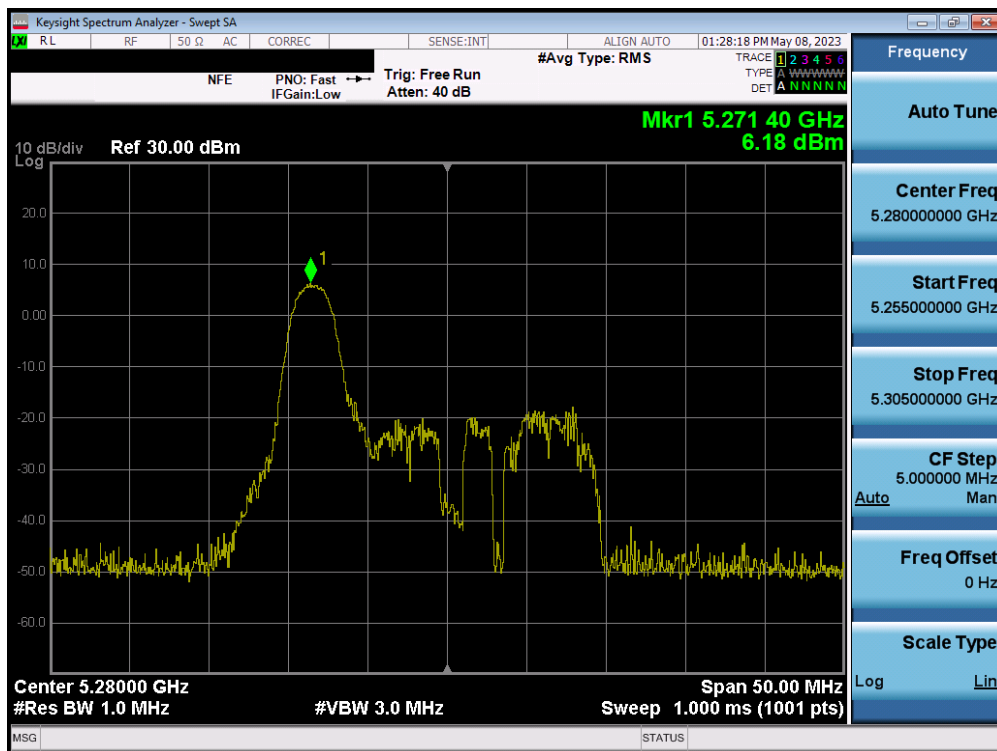


Plot 7-235. Power Spectral Density Plot MIMO ANT2 (20MHz BW 802.11ax – 26 Tones (UNII Band 2A) – Ch. 56)

FCC ID: A3LSMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-07.A3L	Test Dates: 04/03/2023 - 05/12/2023	EUT Type: Portable Tablet	Page 153 of 235

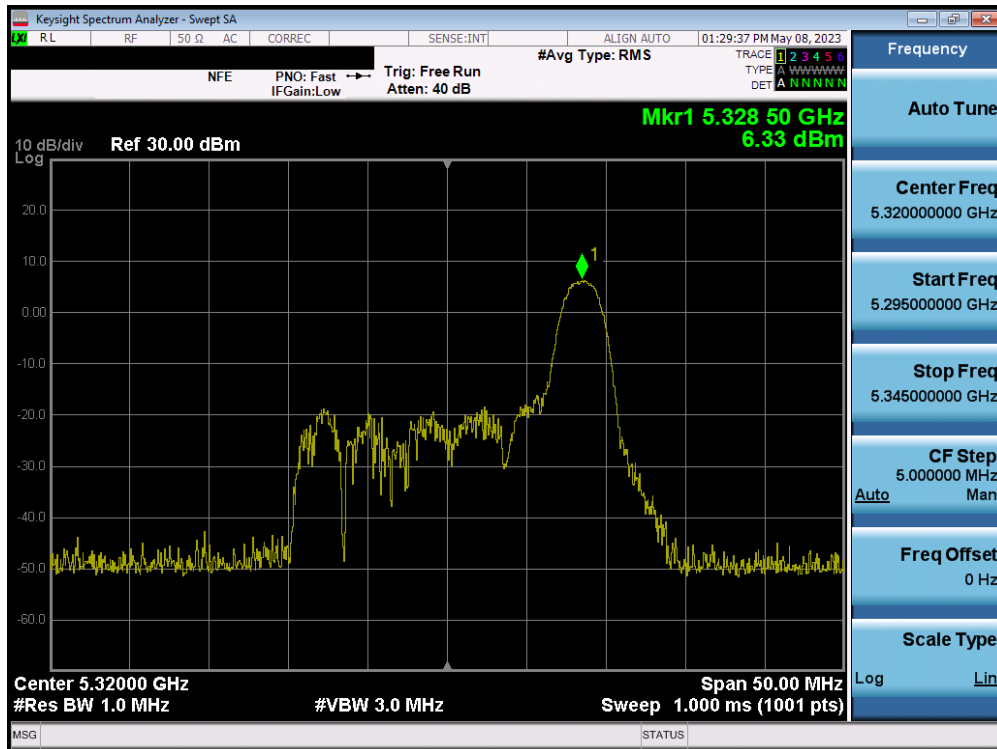


Plot 7-236. Power Spectral Density Plot MIMO ANT2 (20MHz BW 802.11ax – 26 Tones (UNII Band 2A) – Ch. 64)

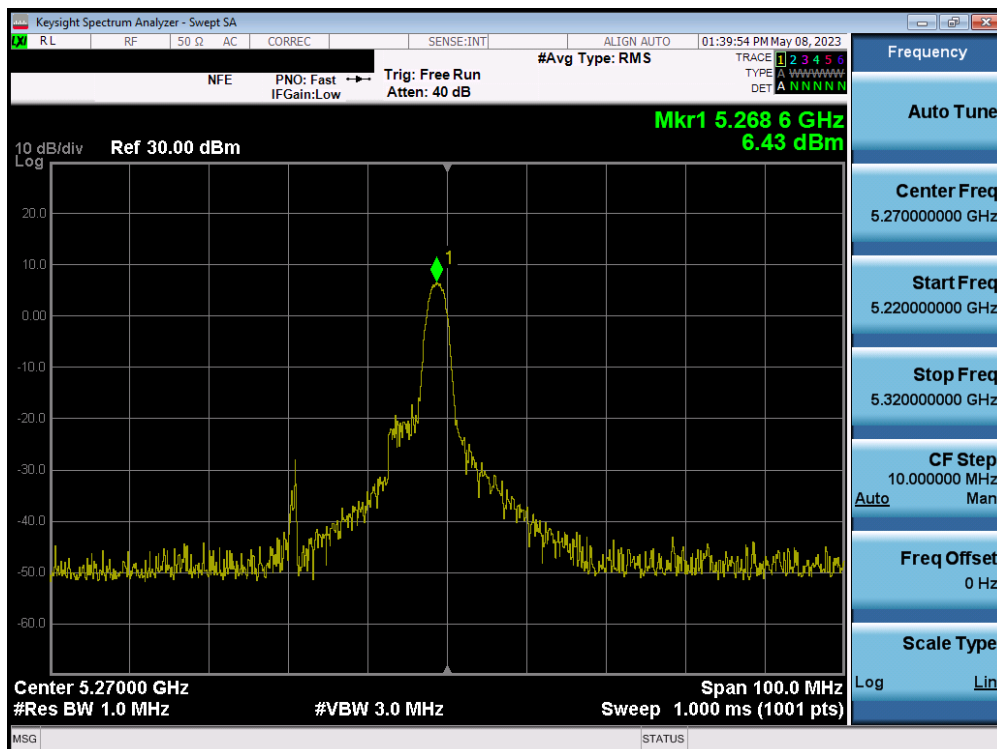


Plot 7-237. Powr Spectral Density Plot MIMO ANT2 (40MHz BW 802.11ax – 26 Tones (UNII Band 2A) – Ch. 54)

FCC ID: A3LSMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-07.A3L	Test Dates: 04/03/2023 - 05/12/2023	EUT Type: Portable Tablet	Page 154 of 235

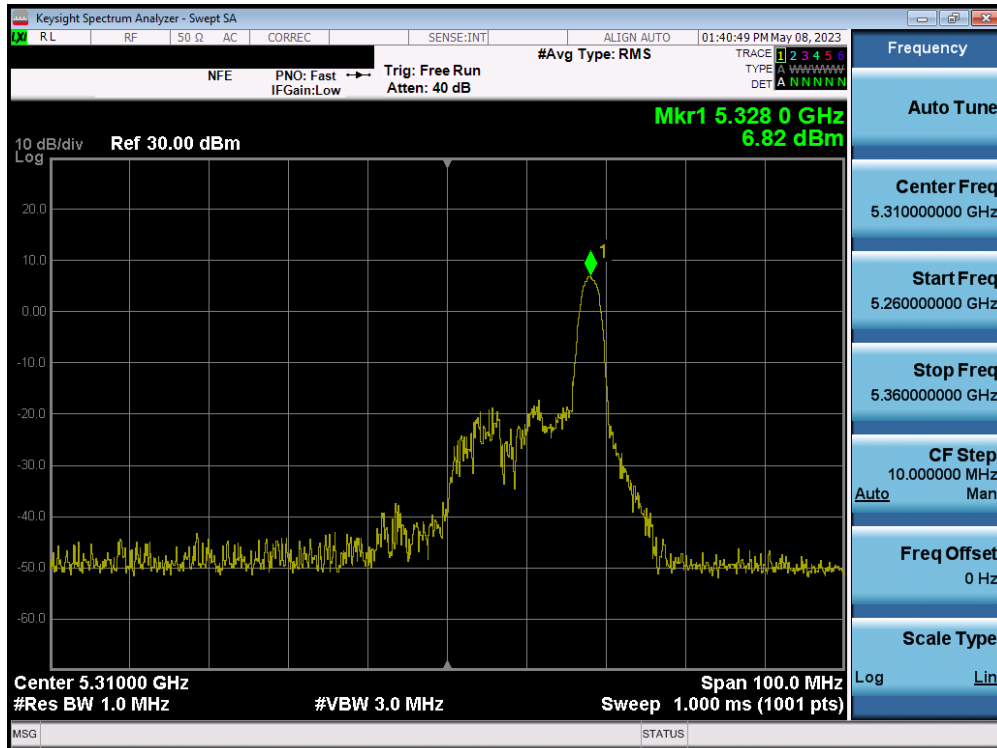


Plot 7-238. Power Spectral Density Plot MIMO ANT2 (40MHz BW 802.11ax – 26 Tones (UNII Band 2A) – Ch. 62)

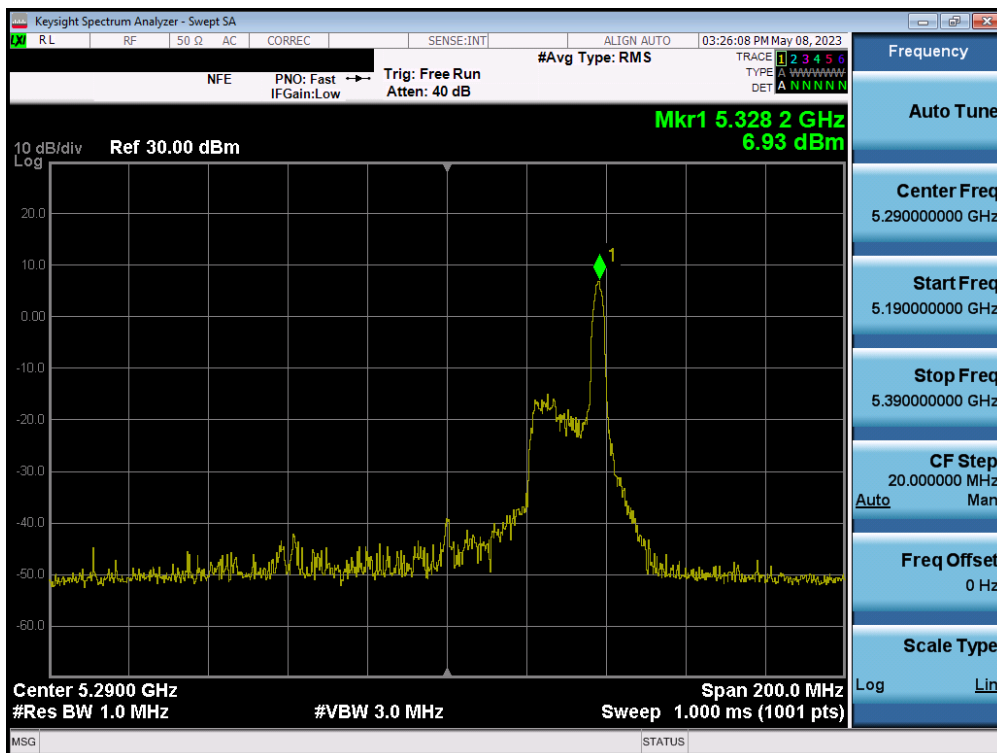


Plot 7-239. Power Spectral Density Plot MIMO ANT2 (80MHz BW 802.11ax – 26 Tones (UNII Band 2A) – Ch. 58)

FCC ID: A3LSMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-07.A3L	Test Dates: 04/03/2023 - 05/12/2023	EUT Type: Portable Tablet	Page 155 of 235

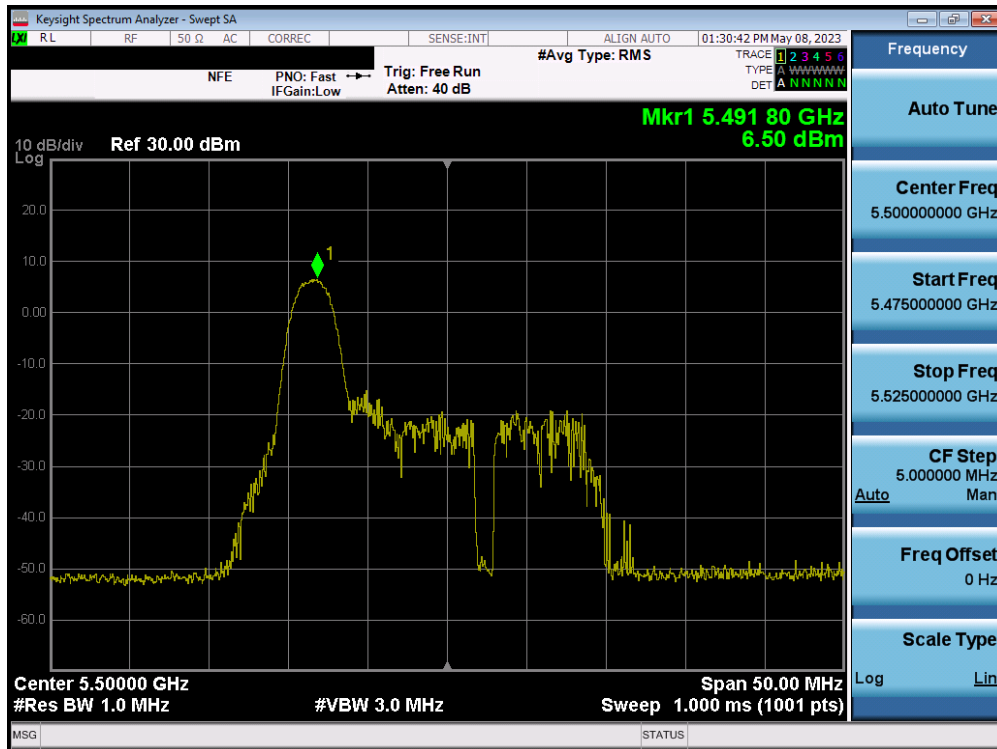


Plot 7-240. Power Spectral Density Plot MIMO ANT2 (20MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 100)

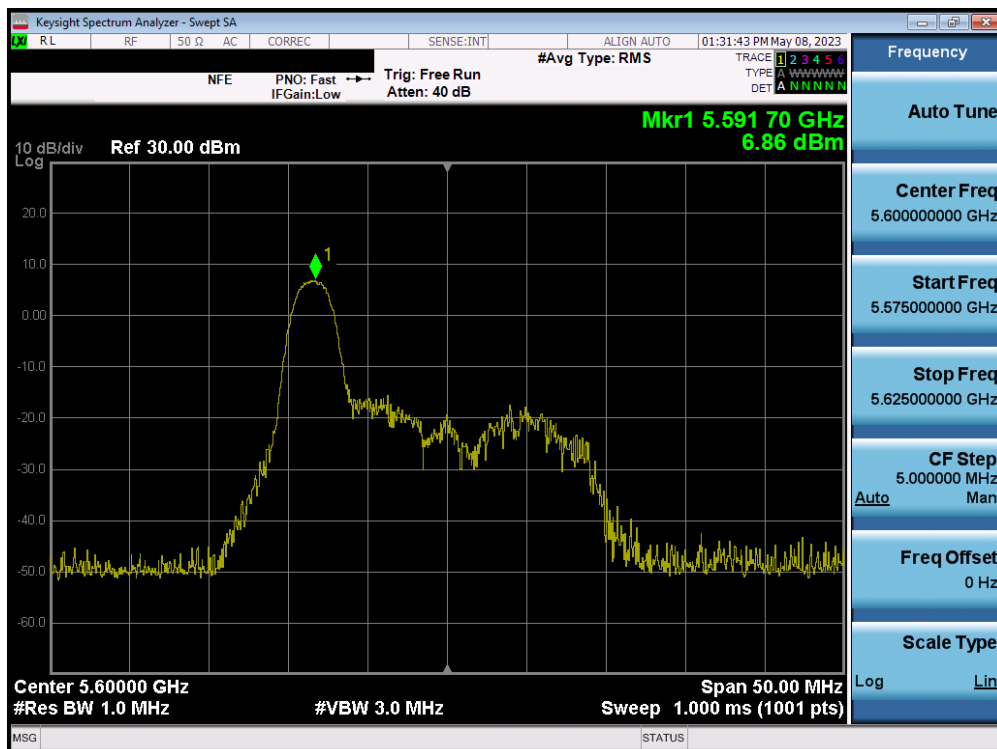


Plot 7-241. Power Spectral Density Plot MIMO ANT2 (20MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 120)

FCC ID: A3LSMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-07.A3L	Test Dates: 04/03/2023 - 05/12/2023	EUT Type: Portable Tablet	Page 156 of 235

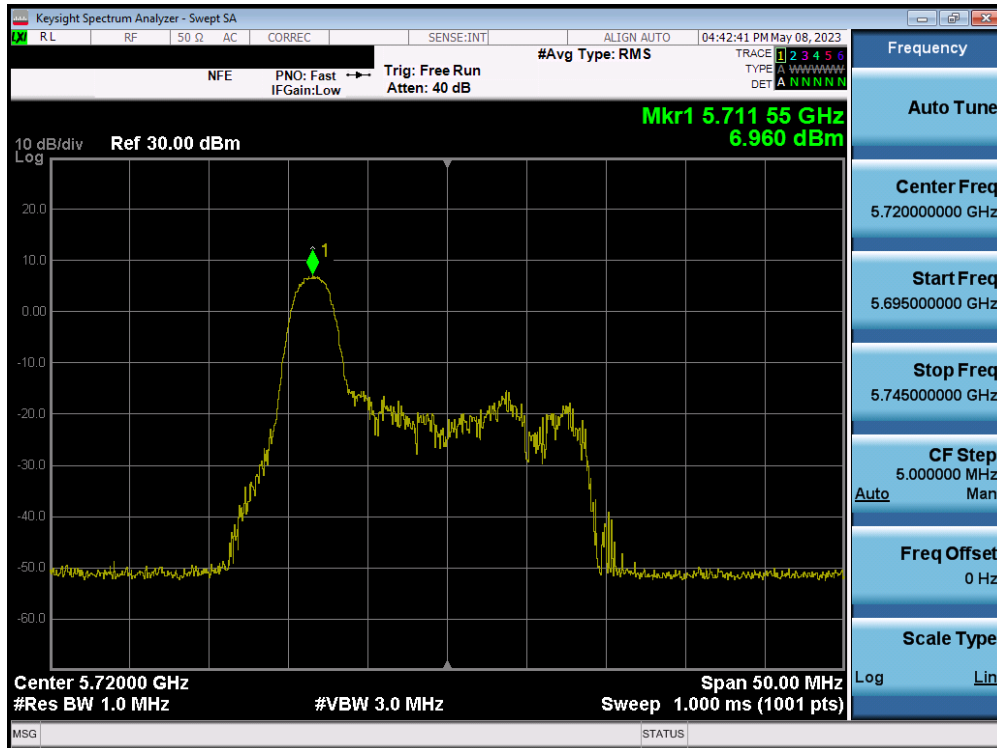


Plot 7-242. Power Spectral Density Plot MIMO ANT2 (20MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 144)

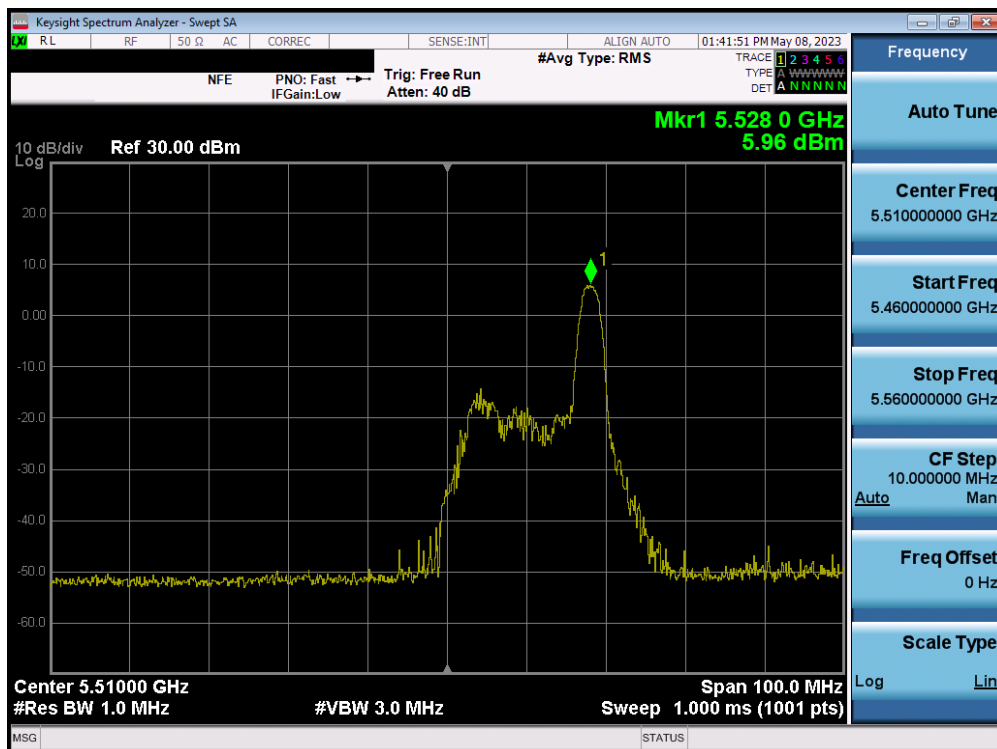


Plot 7-243. Power Spectral Density Plot MIMO ANT2 (40MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 102)

FCC ID: A3LSMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-07.A3L	Test Dates: 04/03/2023 - 05/12/2023	EUT Type: Portable Tablet	Page 157 of 235

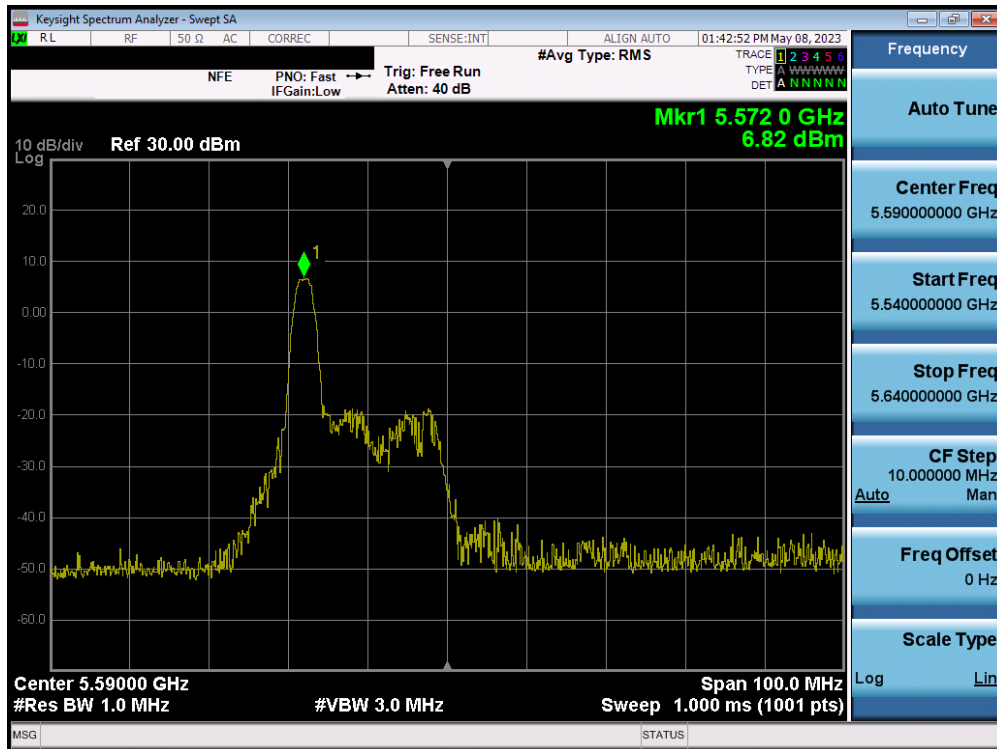


Plot 7-244. Power Spectral Density Plot MIMO ANT2 (40MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 118)

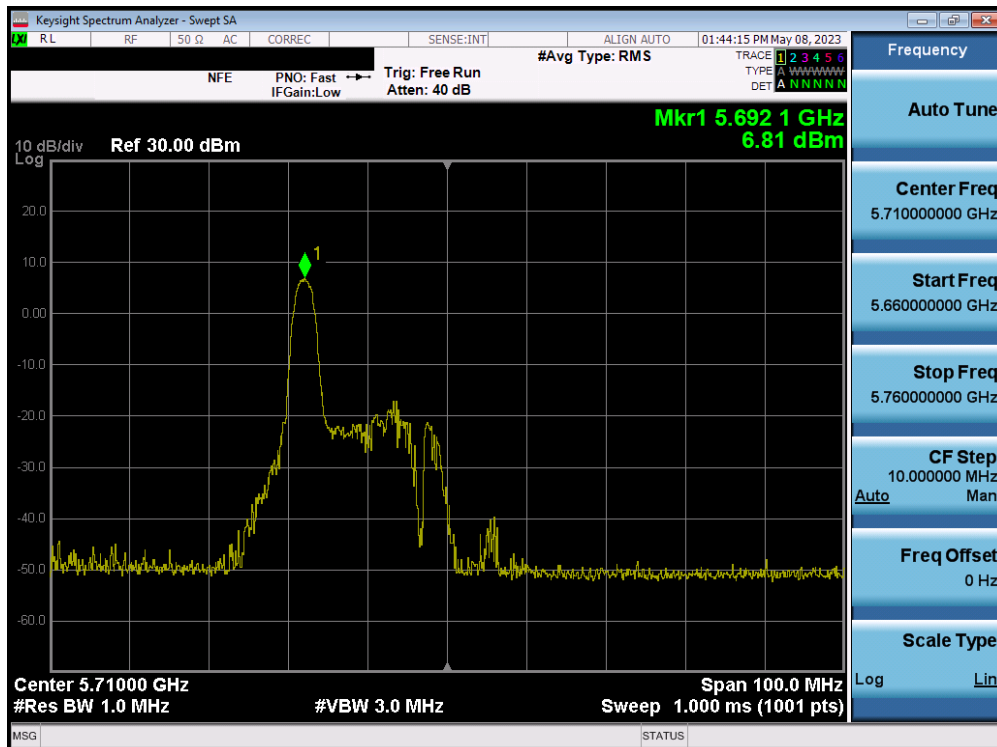


Plot 7-245. Power Spectral Density Plot MIMO ANT2 (40MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 142)

FCC ID: A3LSMX910		MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-07.A3L	Test Dates: 04/03/2023 - 05/12/2023	EUT Type: Portable Tablet	Page 158 of 235	

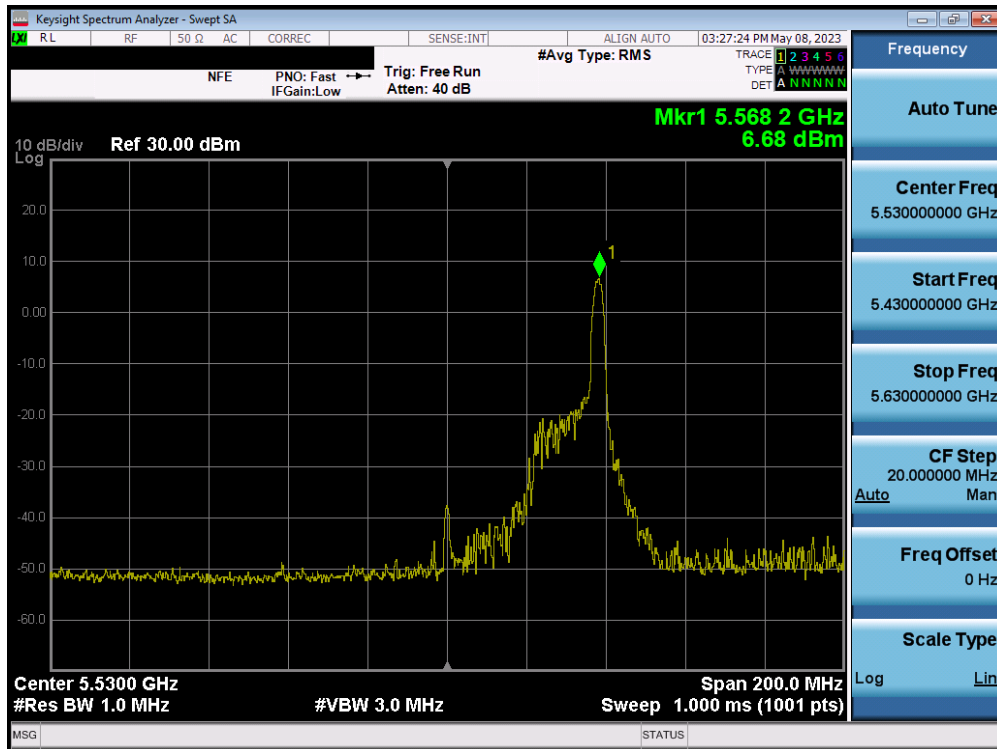


Plot 7-246. Power Spectral Density Plot MIMO ANT2 (80MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 106)

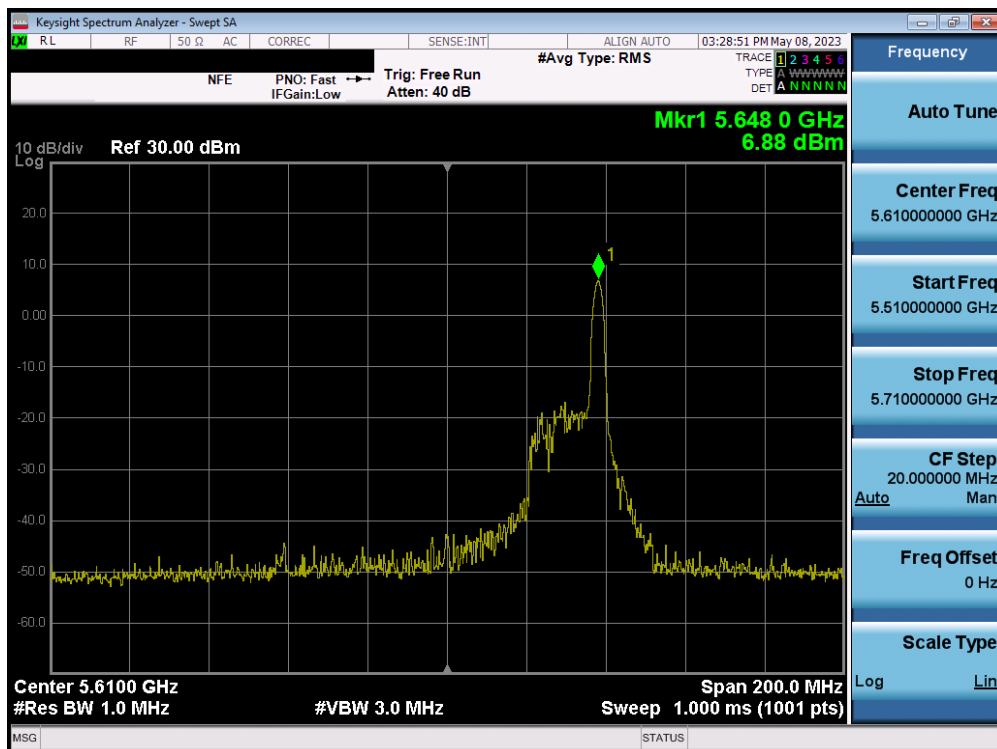


Plot 7-247. Power Spectral Density Plot MIMO ANT2 (80MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 122)

FCC ID: A3LSMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-07.A3L	Test Dates: 04/03/2023 - 05/12/2023	EUT Type: Portable Tablet	Page 159 of 235

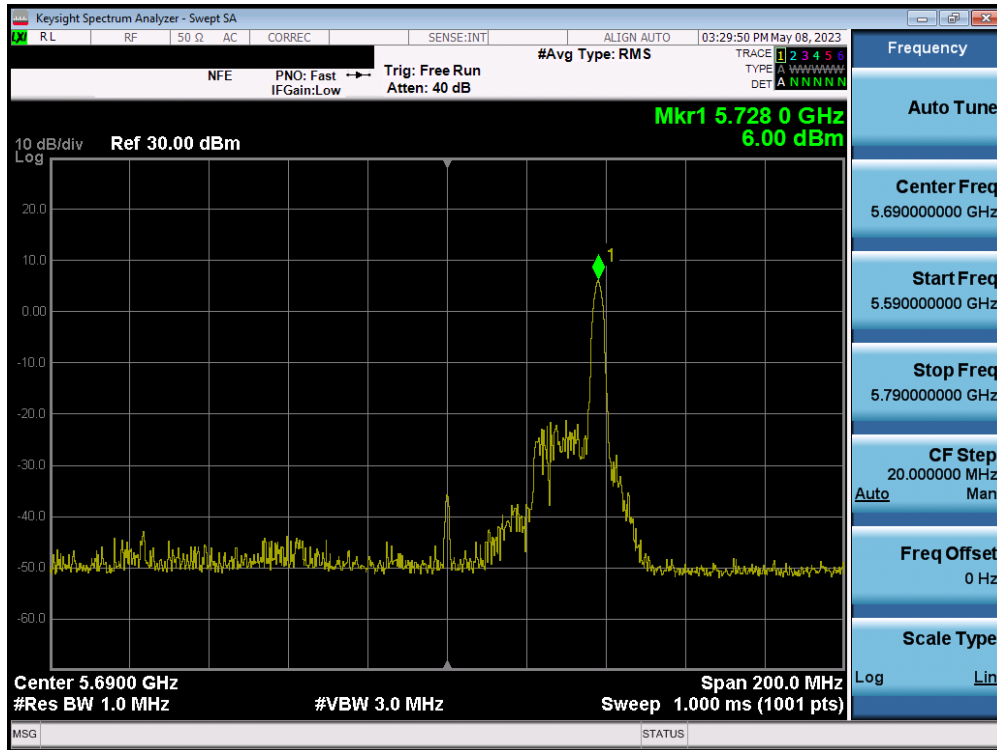


Plot 7-248. Power Spectral Density Plot MIMO ANT2 (80MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 138)

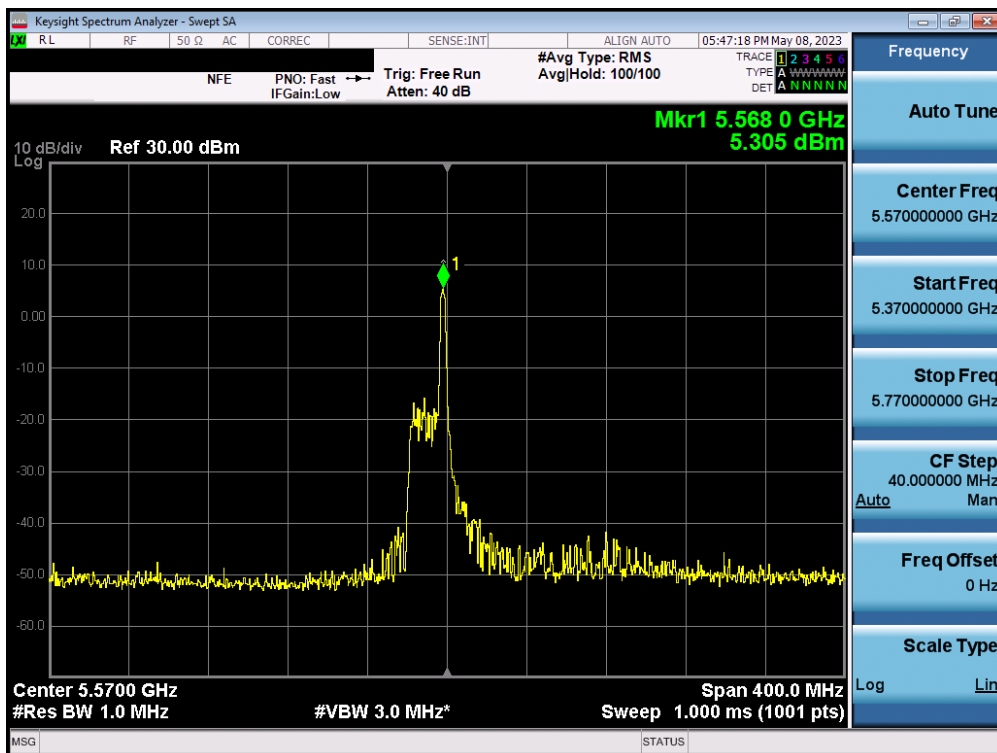


Plot 7-249. Power Spectral Density Plot MIMO ANT2 (160MHz(L) BW 802.11ax – 2 Tones (UNII Band 2C) – Ch. 114)

FCC ID: A3LSMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-07.A3L	Test Dates: 04/03/2023 - 05/12/2023	EUT Type: Portable Tablet	Page 160 of 235

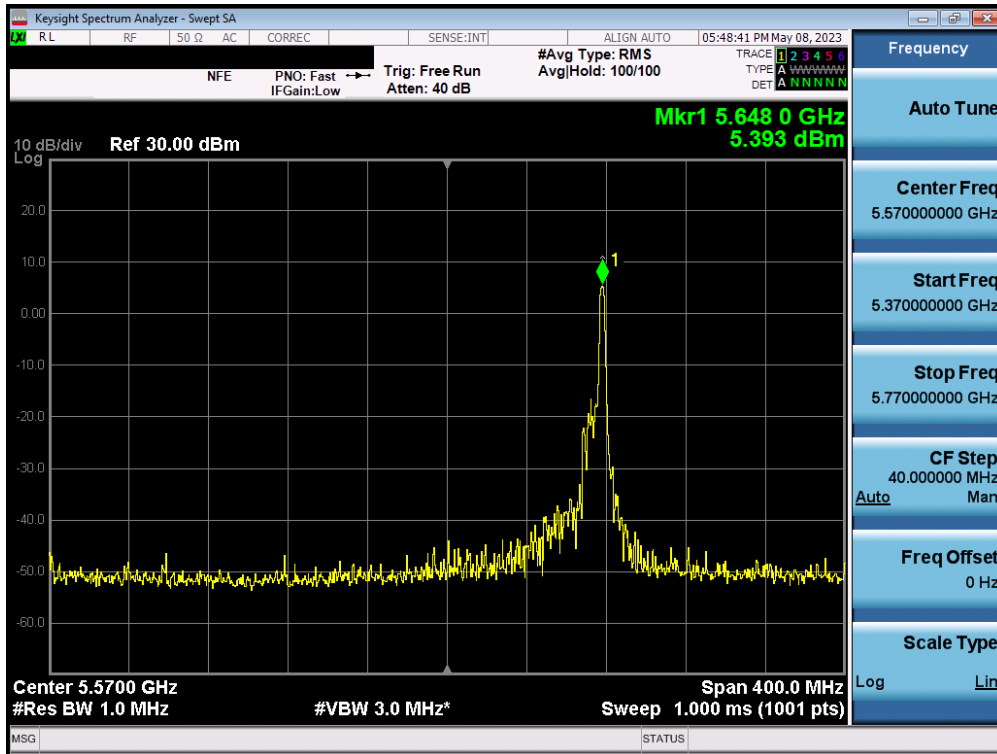


Plot 7-250. Power Spectral Density Plot MIMO ANT2 (160MHz(U) BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 114)

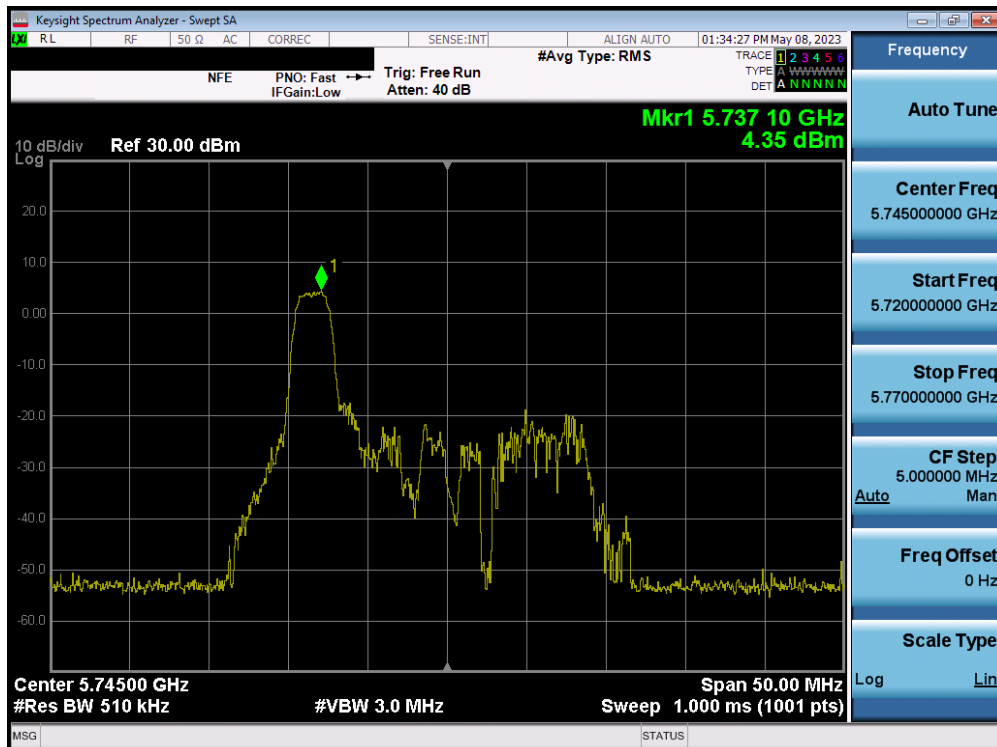


Plot 7-251. Power Spectral Density Plot MIMO ANT2 (20MHz BW 802.11ax – 26 Tones (UNII Band 3) – Ch. 149)

FCC ID: A3LSMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-07.A3L	Test Dates: 04/03/2023 - 05/12/2023	EUT Type: Portable Tablet	Page 161 of 235

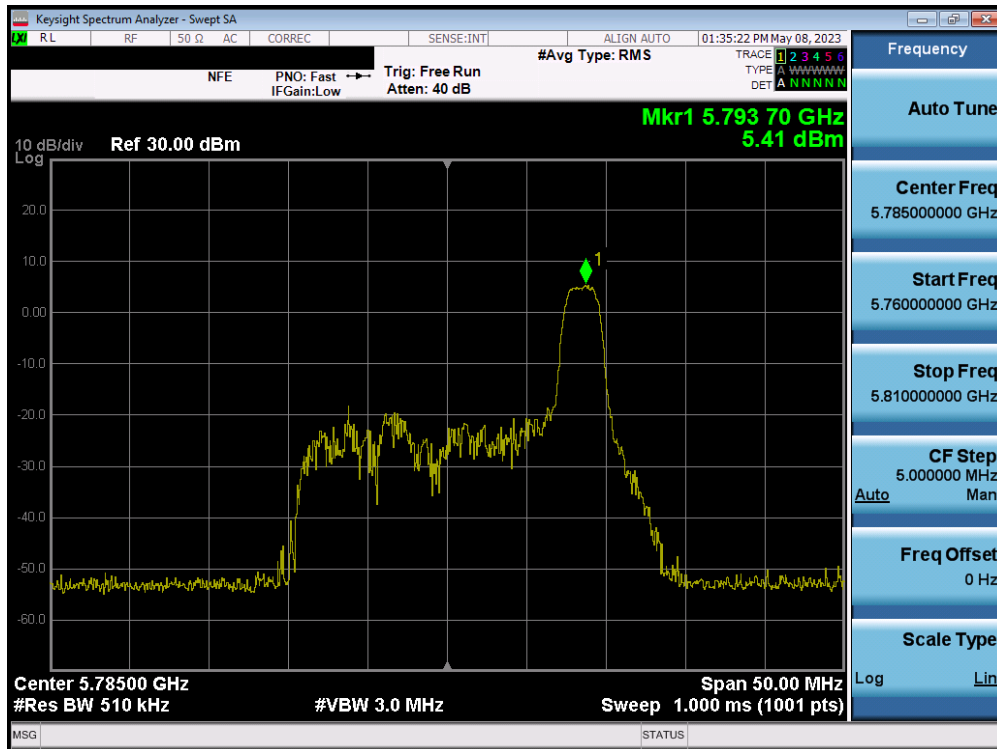


Plot 7-252. Power Spectral Density Plot MIMO ANT2 (20MHz BW 802.11ax – 26 Tones (UNII Band 3) – Ch. 157)

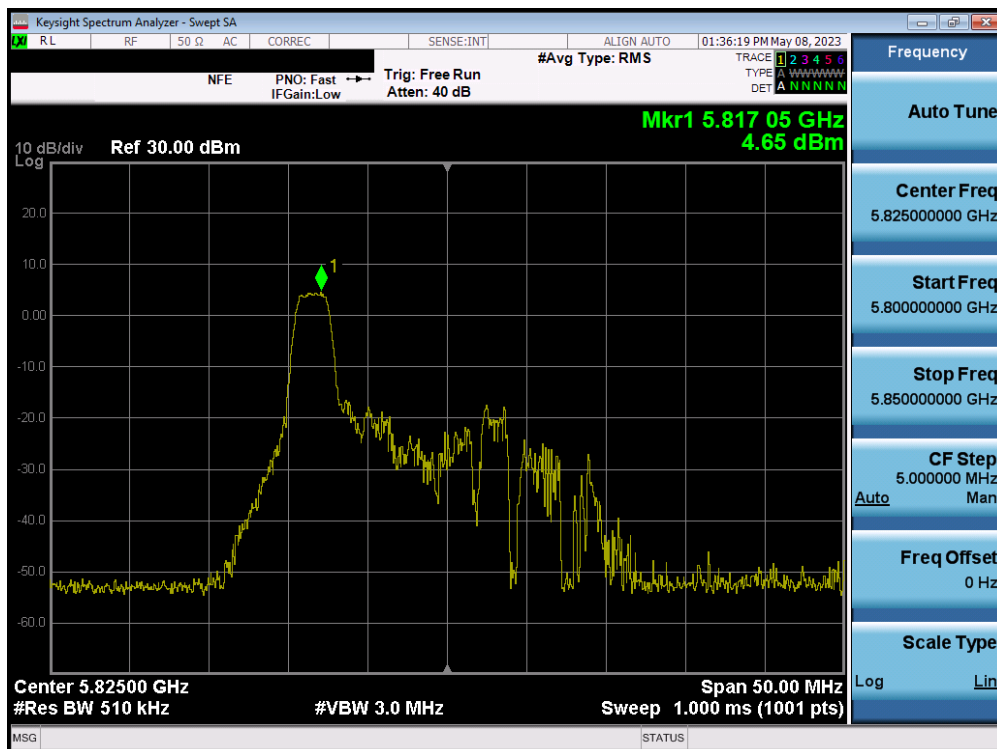


Plot 7-253. Power Spectral Density Plot MIMO ANT2 (20MHz BW 802.11ax – 26 Tones (UNII Band 3) – Ch. 165)

FCC ID: A3LSMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-07.A3L	Test Dates: 04/03/2023 - 05/12/2023	EUT Type: Portable Tablet	Page 162 of 235

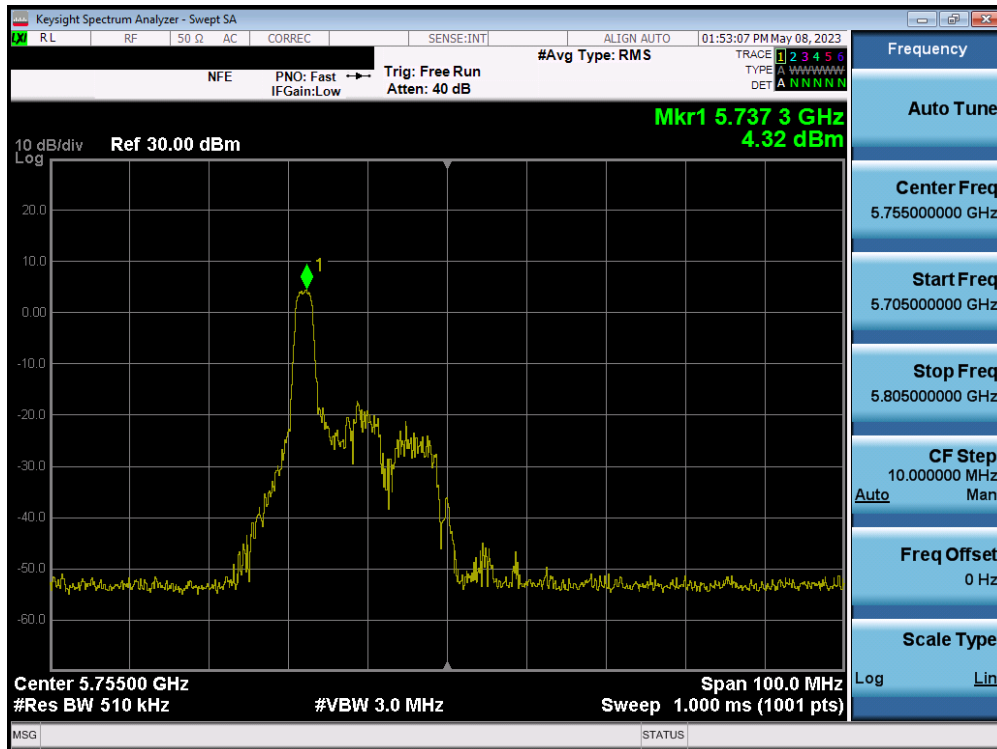


Plot 7-254. Power Spectral Density Plot MIMO ANT2 (40MHz BW 802.11ax – 26 Tones (UNII Band 3) – Ch. 151)

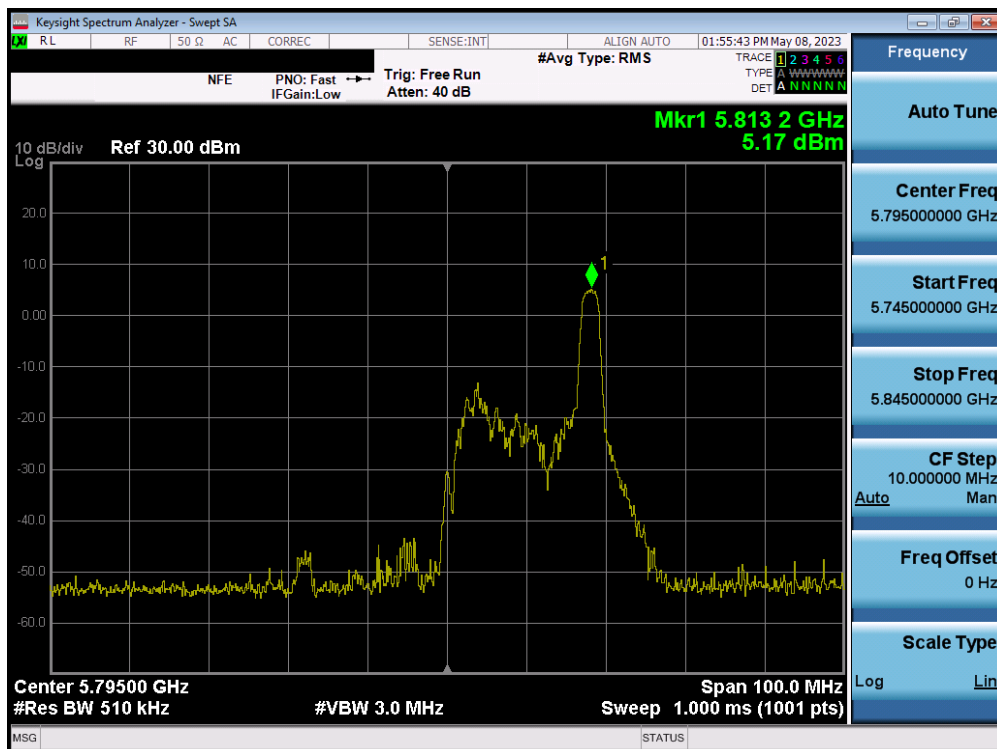


Plot 7-255. Power Spectral Density Plot MIMO ANT2 (40MHz BW 802.11ax – 26 Tones (UNII Band 3) – Ch. 159)

FCC ID: A3LSMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-07.A3L	Test Dates: 04/03/2023 - 05/12/2023	EUT Type: Portable Tablet	Page 163 of 235

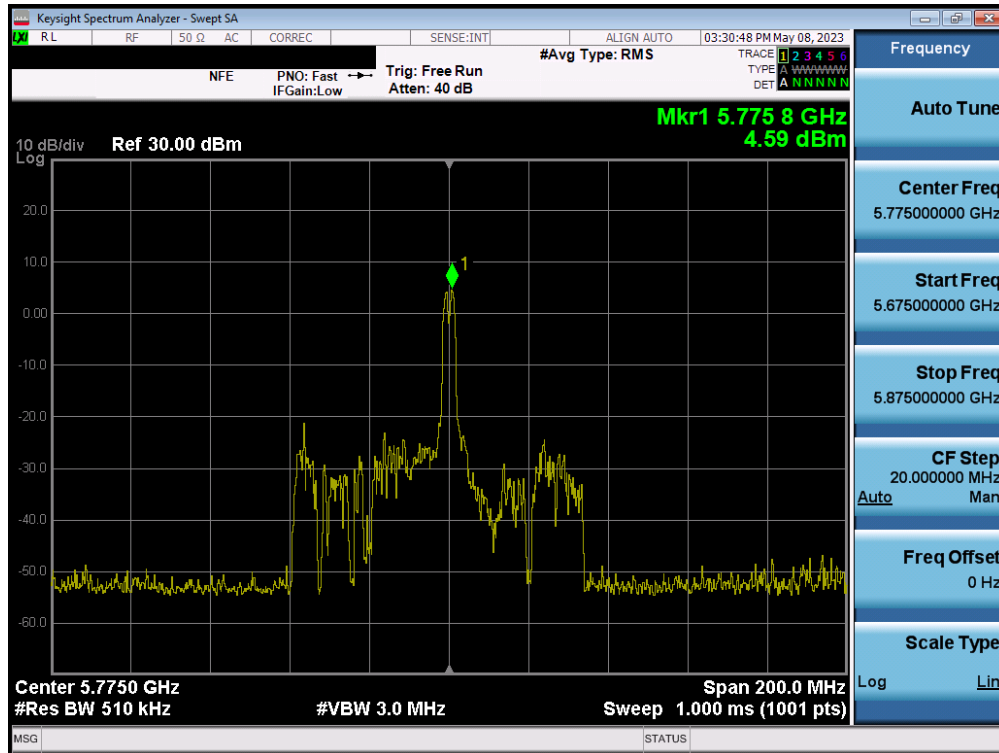


Plot 7-256. Power Spectral Density Plot MIMO ANT2 (80MHz BW 802.11ax – 26 Tones (UNII Band 3) – Ch. 155)

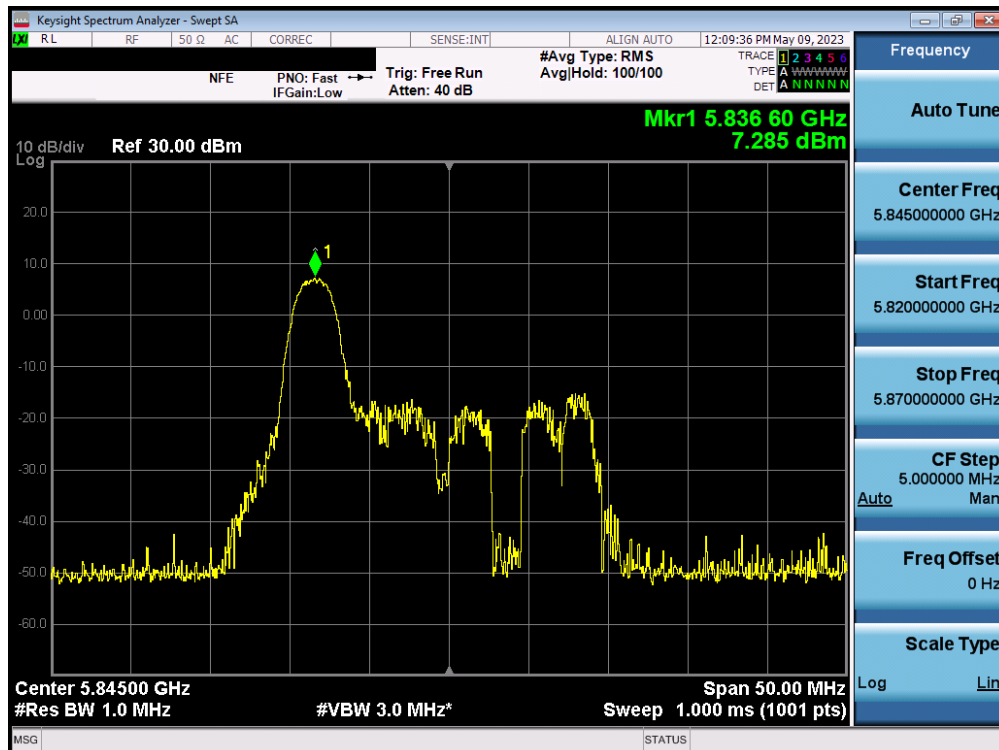


Plot 7-257. Power Spectral Density Plot MIMO ANT2 (20MHz BW 802.11ax – 26 Tones (UNII Band 3/4) – Ch. 169)

FCC ID: A3LSMX910		MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-07.A3L	Test Dates: 04/03/2023 - 05/12/2023	EUT Type: Portable Tablet		Page 164 of 235

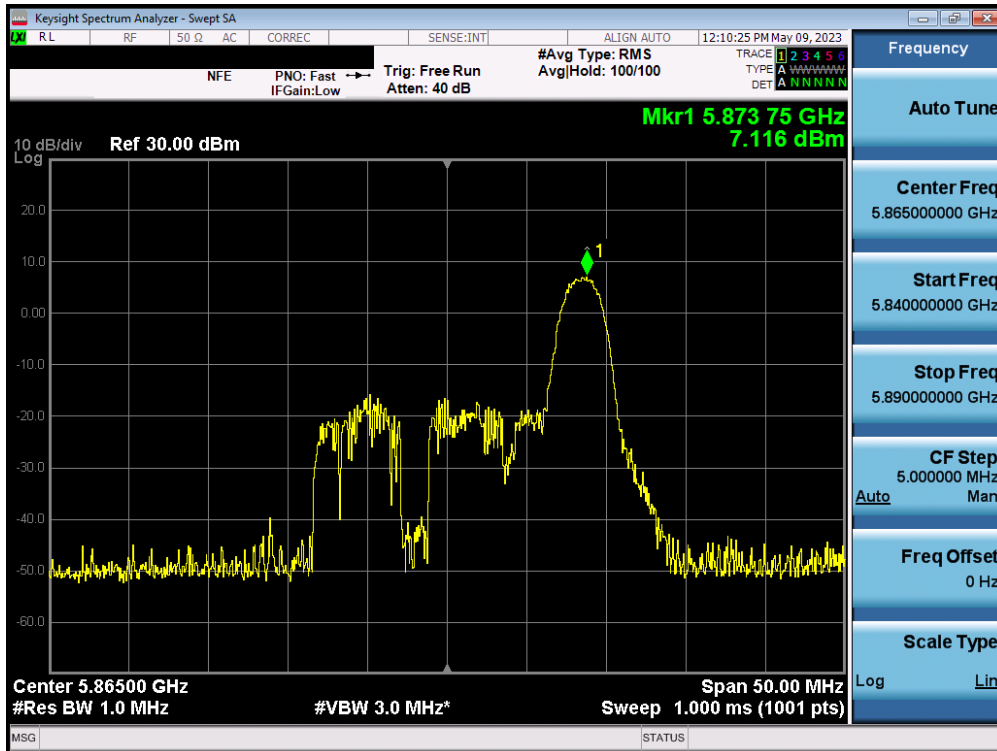


Plot 7-258. Power Spectral Density Plot MIMO ANT2 (20MHz BW 802.11ax – 26 Tones (UNII Band 4) – Ch. 173)

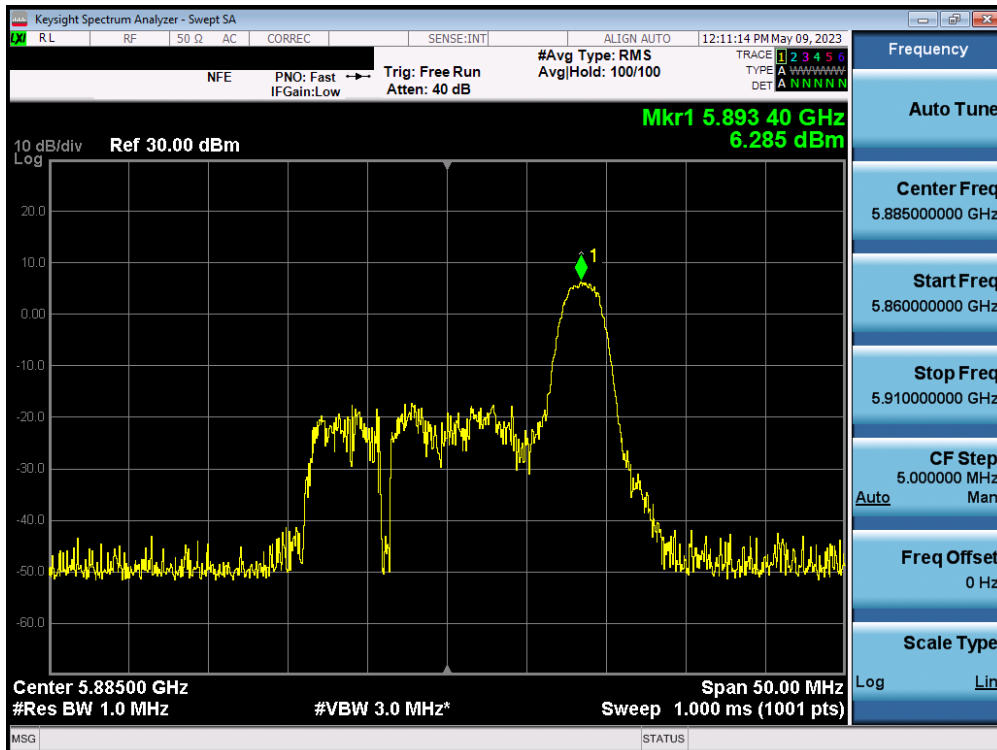


Plot 7-259. Power Spectral Density Plot MIMO ANT2 (20MHz BW 802.11ax – 26 Tones (UNII Band 4) – Ch. 177)

FCC ID: A3LSMX910		MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-07.A3L	Test Dates: 04/03/2023 - 05/12/2023	EUT Type: Portable Tablet	Page 165 of 235	

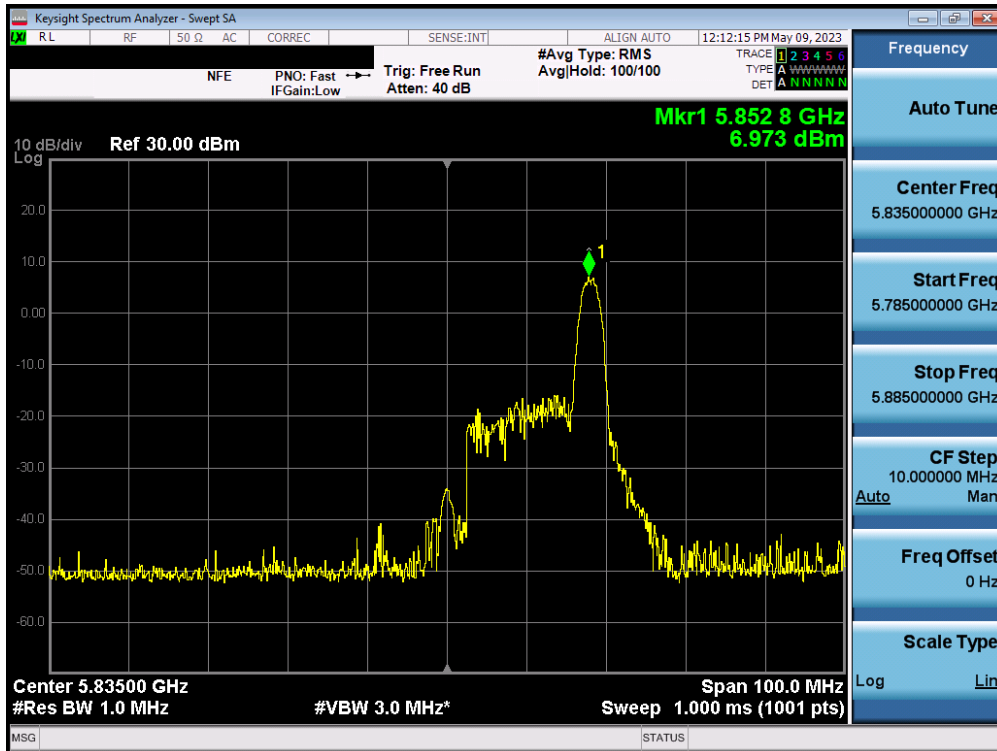


Plot 7-260. Power Spectral Density Plot MIMO ANT2 (40MHz BW 802.11ax – 26 Tones (UNII Band 3/4) – Ch. 167)

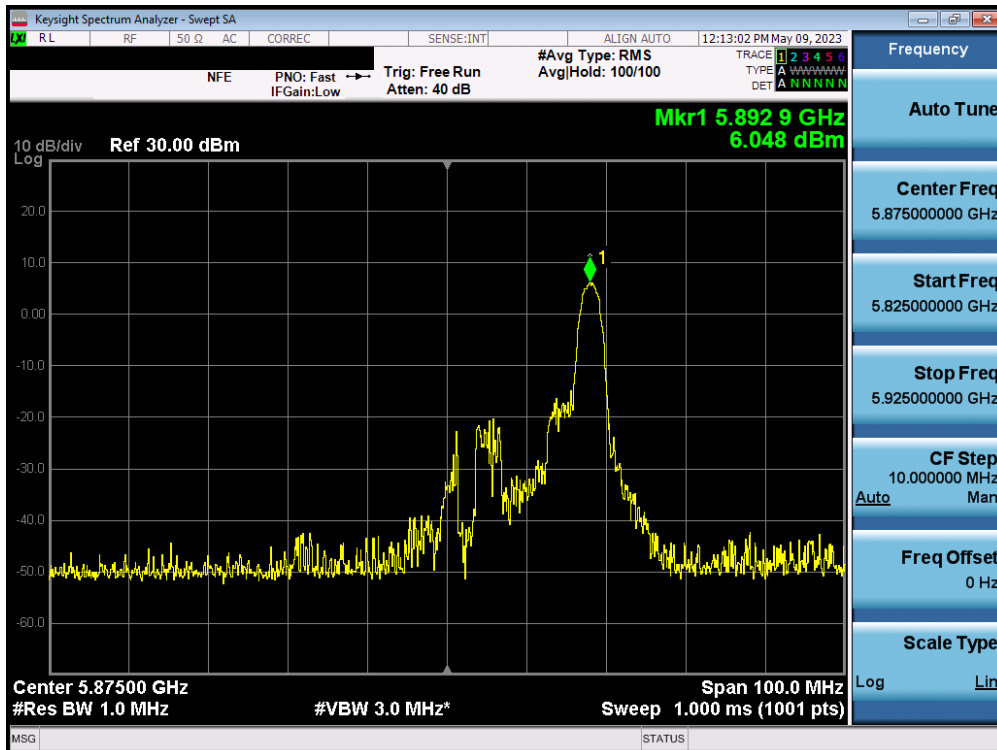


Plot 7-261. Power Spectral Density Plot MIMO ANT2 (40MHz BW 802.11ax – 26 Tones (UNII Band 4) – Ch. 175)

FCC ID: A3LSMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-07.A3L	Test Dates: 04/03/2023 - 05/12/2023	EUT Type: Portable Tablet	Page 166 of 235

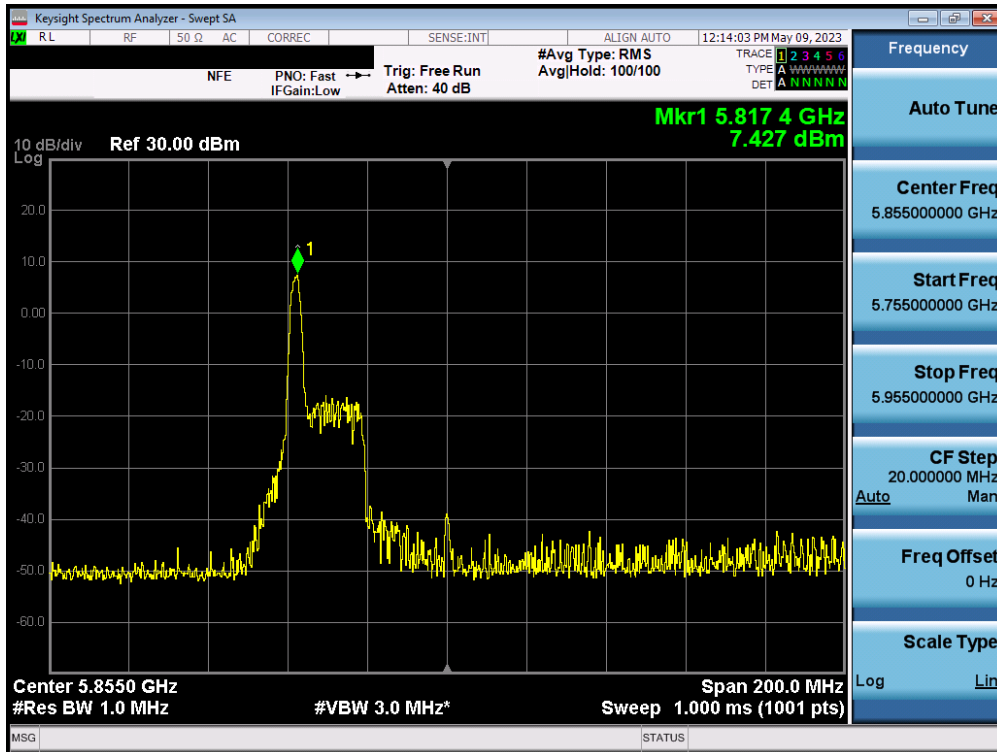


Plot 7-262. Power Spectral Density Plot MIMO ANT2 (80MHz BW 802.11ax – 26 Tones (UNII Band 3/4) – Ch. 171)

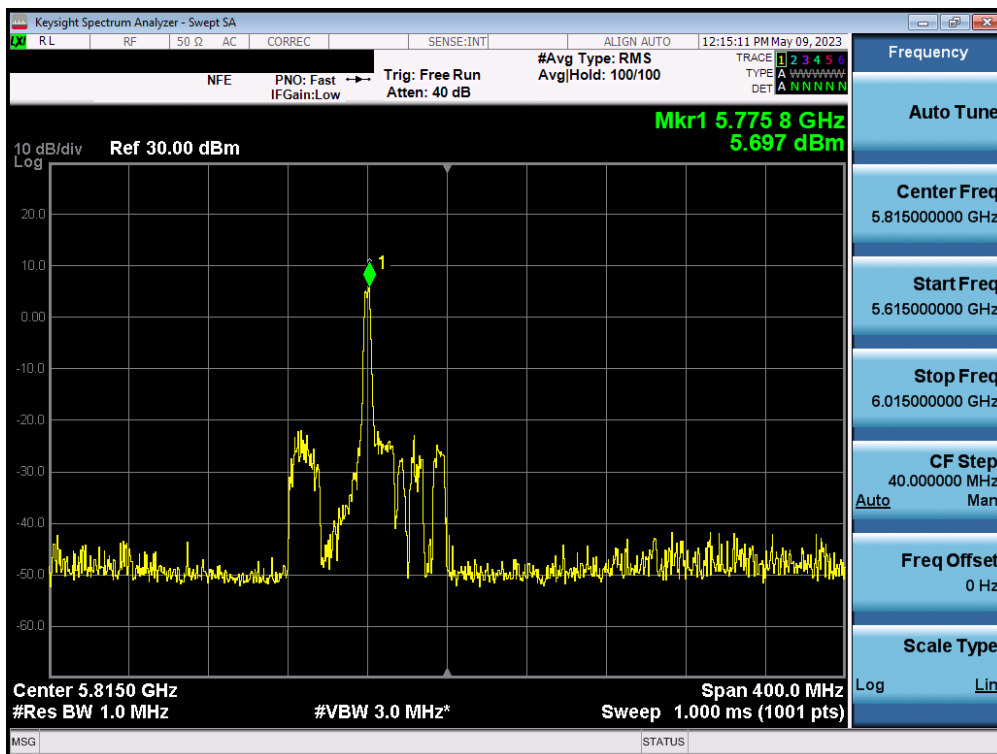


Plot 7-263. Power Spectral Density Plot MIMO ANT2 (160MHz(L) BW 802.11ax – 26 Tones (UNII Band 3/4) – Ch. 163)

FCC ID: A3LSMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-07.A3L	Test Dates: 04/03/2023 - 05/12/2023	EUT Type: Portable Tablet	Page 167 of 235

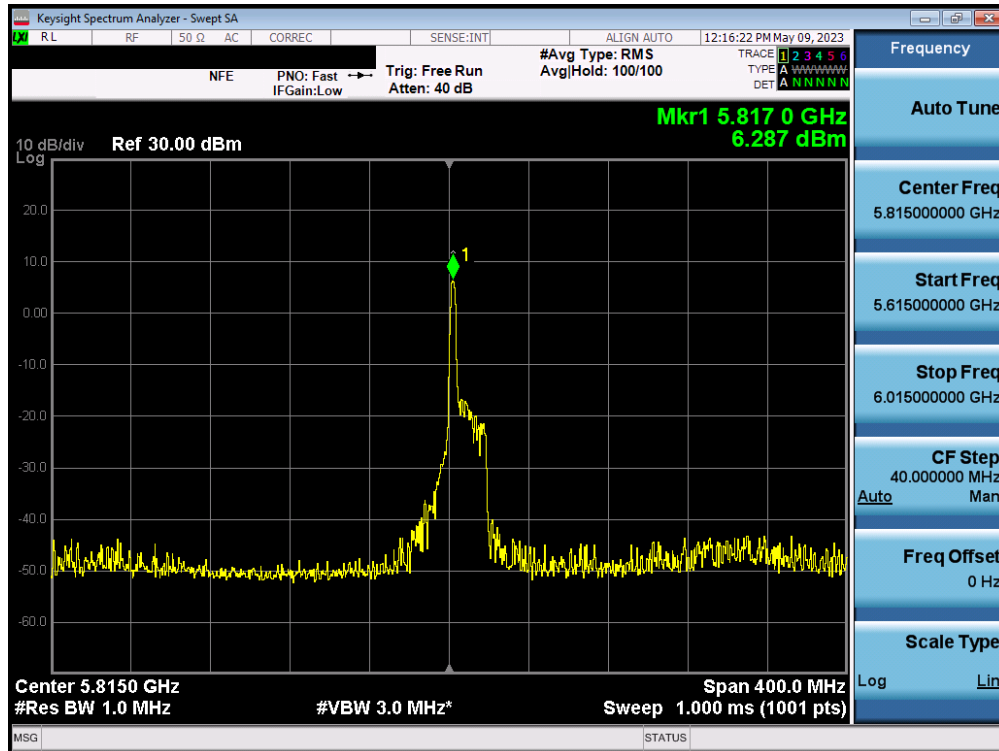


Plot 7-264. Power Spectral Density Plot MIMO ANT2 (160MHz(U) BW 802.11ax – 26 Tones (UNII Band 3/4) – Ch. 163)

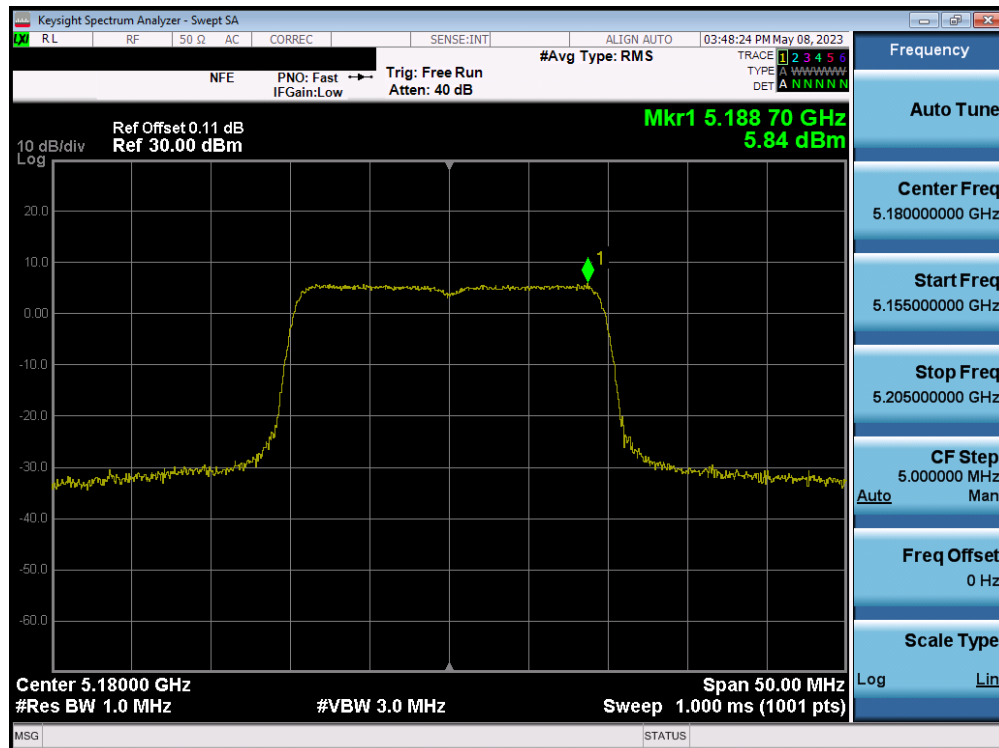


Plot 7-265. Power Spectral Density Plot MIMO ANT2 (20MHz BW 802.11ax – Full Tones (UNII Band 1) – Ch. 36)

FCC ID: A3LSMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-07.A3L	Test Dates: 04/03/2023 - 05/12/2023	EUT Type: Portable Tablet	Page 168 of 235

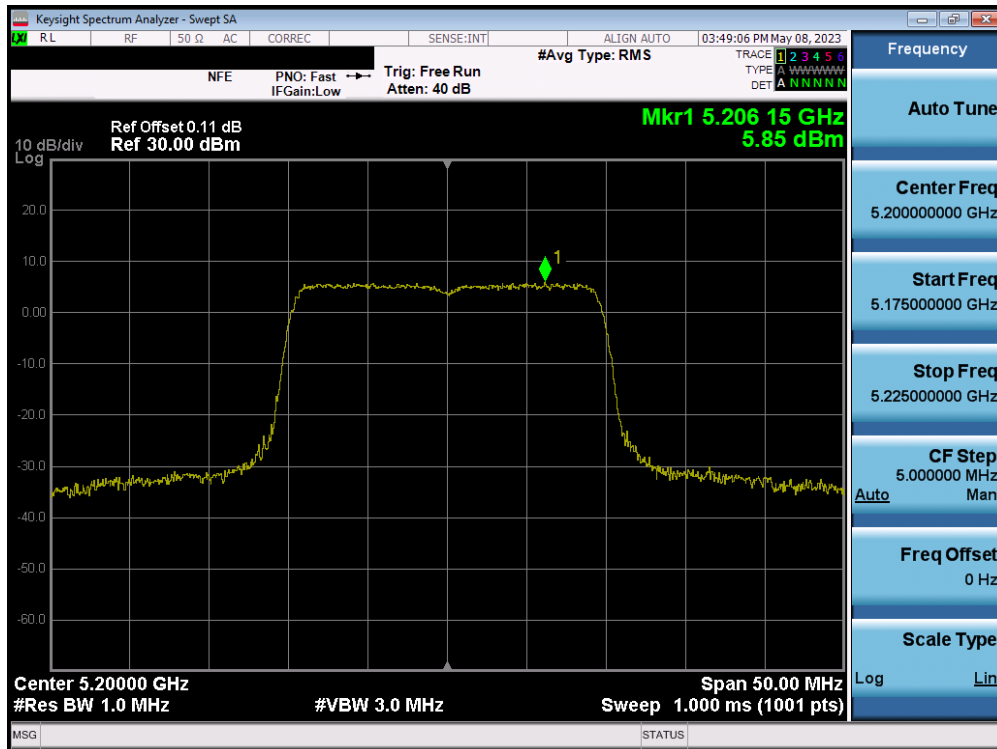


Plot 7-266. Power Spectral Density Plot MIMO ANT2 (20MHz BW 802.11ax – Full Tones (UNII Band 1) – Ch. 40)

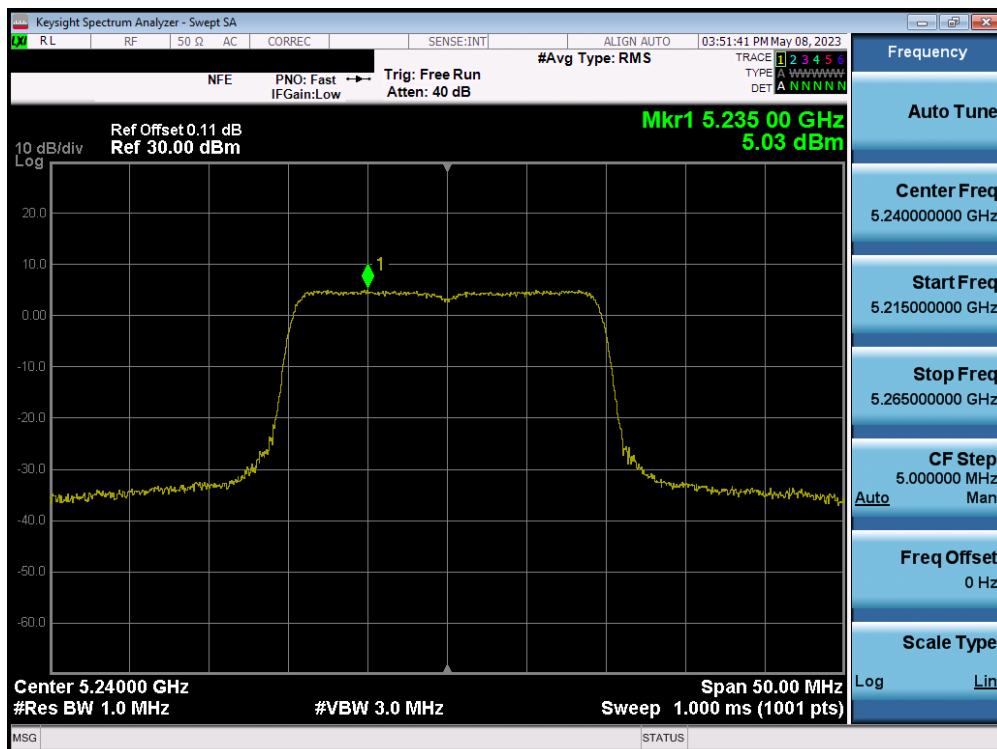


Plot 7-267. Power Spectral Density Plot MIMO ANT2 (20MHz BW 802.11ax – Full Tones (UNII Band 1) – Ch. 48)

FCC ID: A3LSMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-07.A3L	Test Dates: 04/03/2023 - 05/12/2023	EUT Type: Portable Tablet	Page 169 of 235

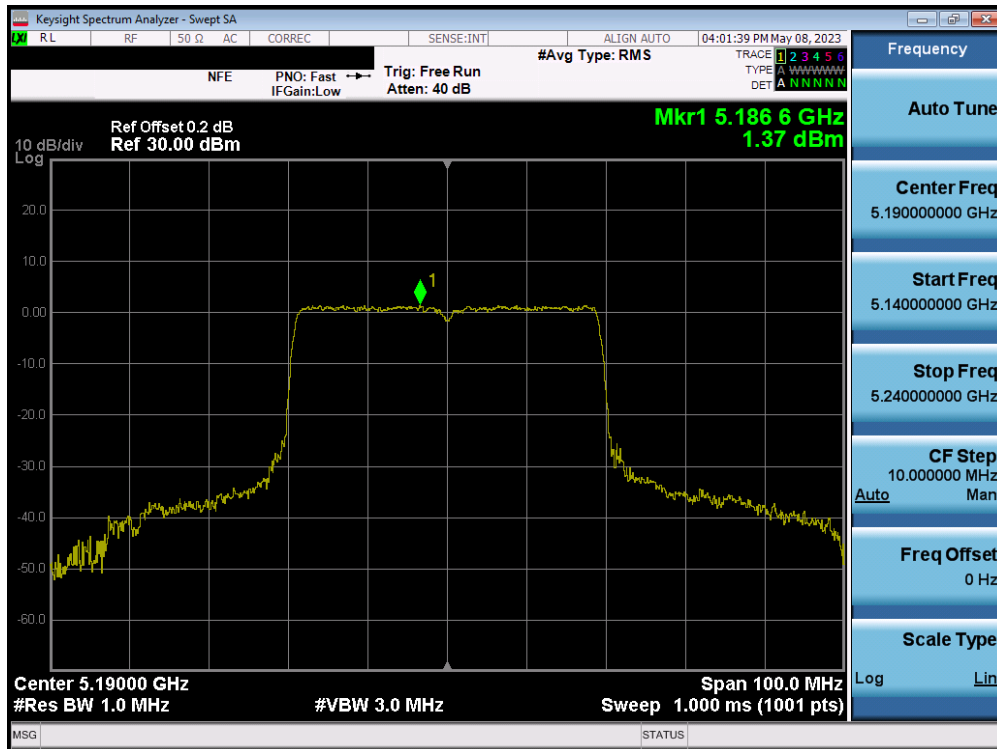


Plot 7-268. Power Spectral Density Plot MIMO ANT2 (40MHz BW 802.11ax – Full Tones (UNII Band 1) – Ch. 38)

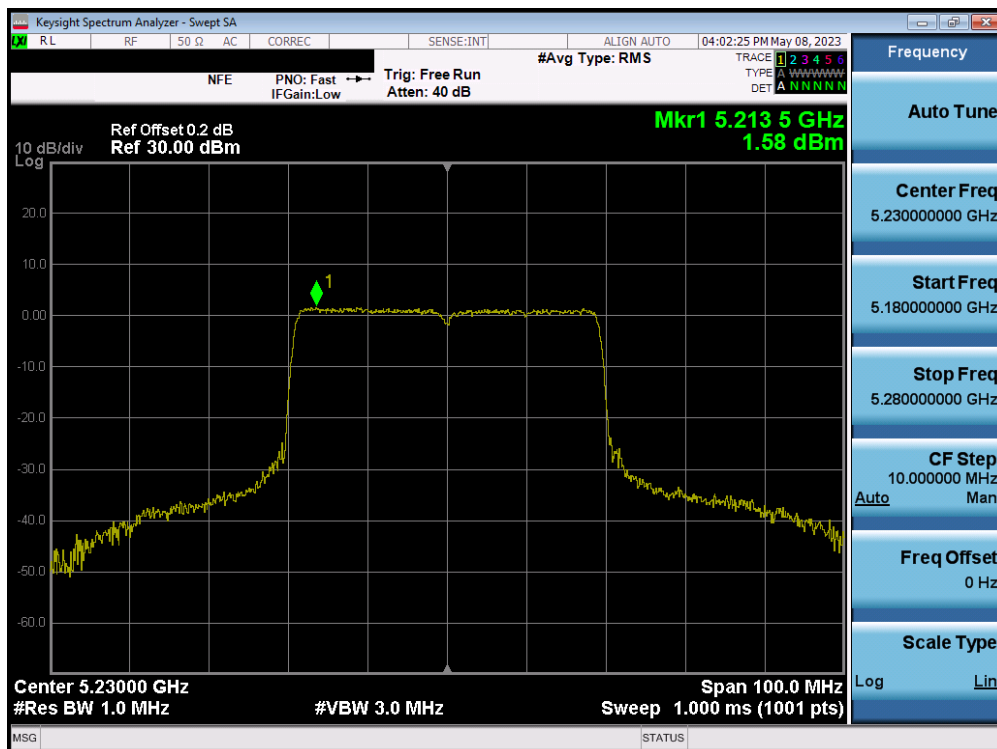


Plot 7-269. Power Spectral Density Plot MIMO ANT2 (40MHz BW 802.11ax – Full Tones (UNII Band 1) – Ch. 46)

FCC ID: A3LSMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-07.A3L	Test Dates: 04/03/2023 - 05/12/2023	EUT Type: Portable Tablet	Page 170 of 235

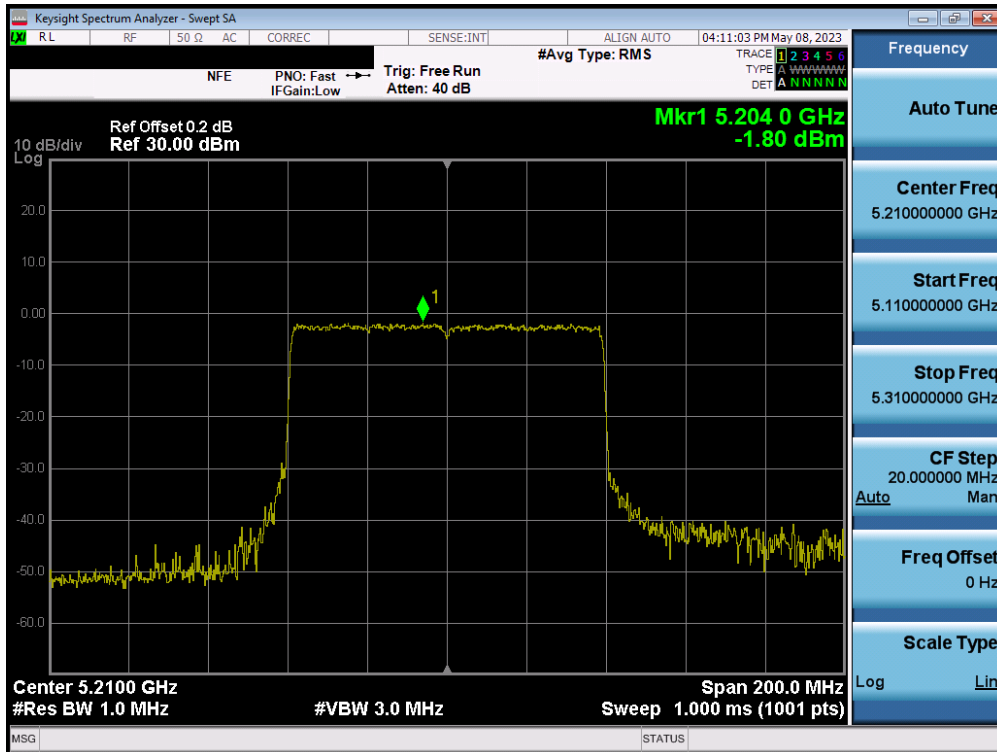


Plot 7-270. Power Spectral Density Plot MIMO ANT2 (80MHz BW 802.11ax – Full Tones (UNII Band 1) – Ch. 42)

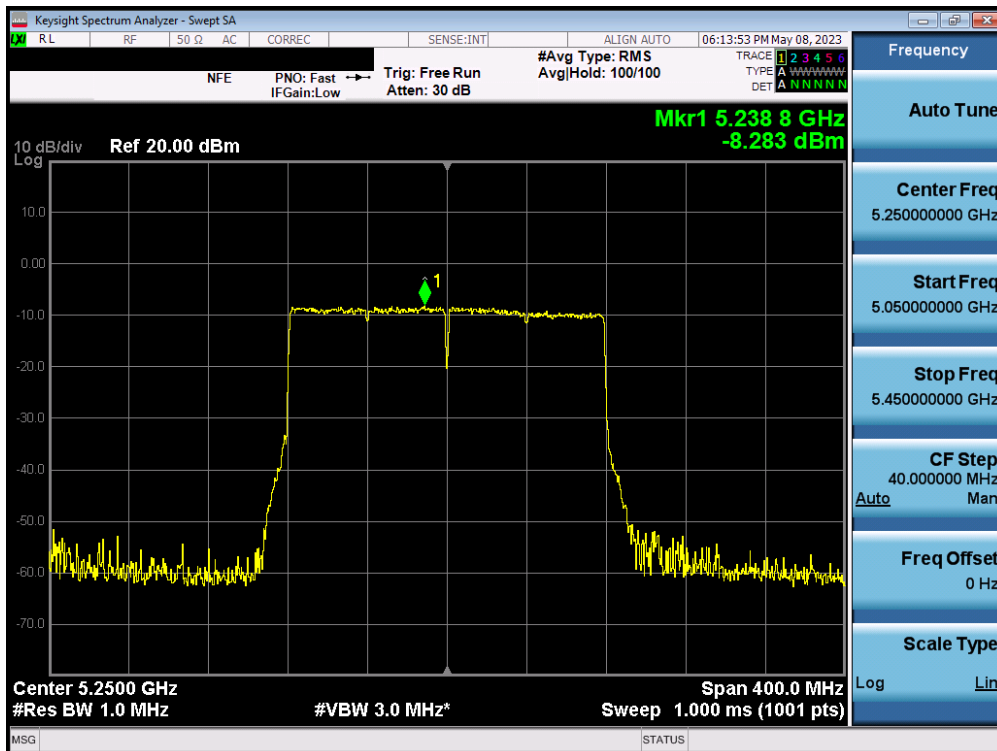


Plot 7-271. Power Spectral Density Plot MIMO ANT2 (160MHz BW 802.11ax – Full Tones (UNII Band 1/2A) – Ch. 50)

FCC ID: A3LSMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-07.A3L	Test Dates: 04/03/2023 - 05/12/2023	EUT Type: Portable Tablet	Page 171 of 235

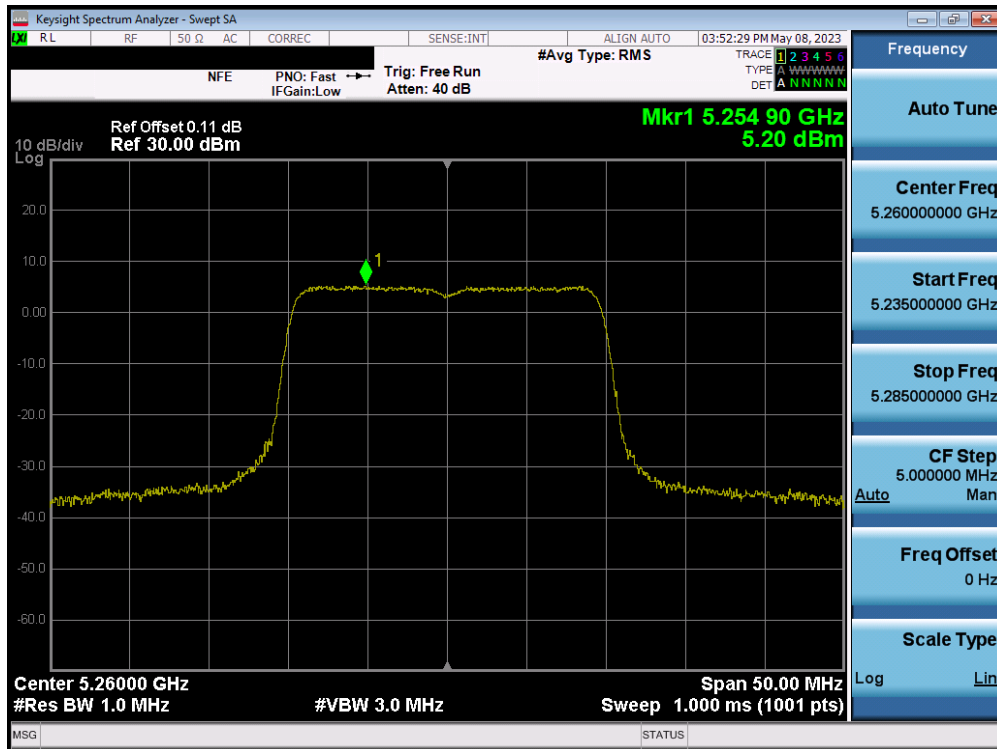


Plot 7-272. Power Spectral Density Plot MIMO ANT2 (20MHz BW 802.11ax – Full Tones (UNII Band 2A) – Ch. 52)

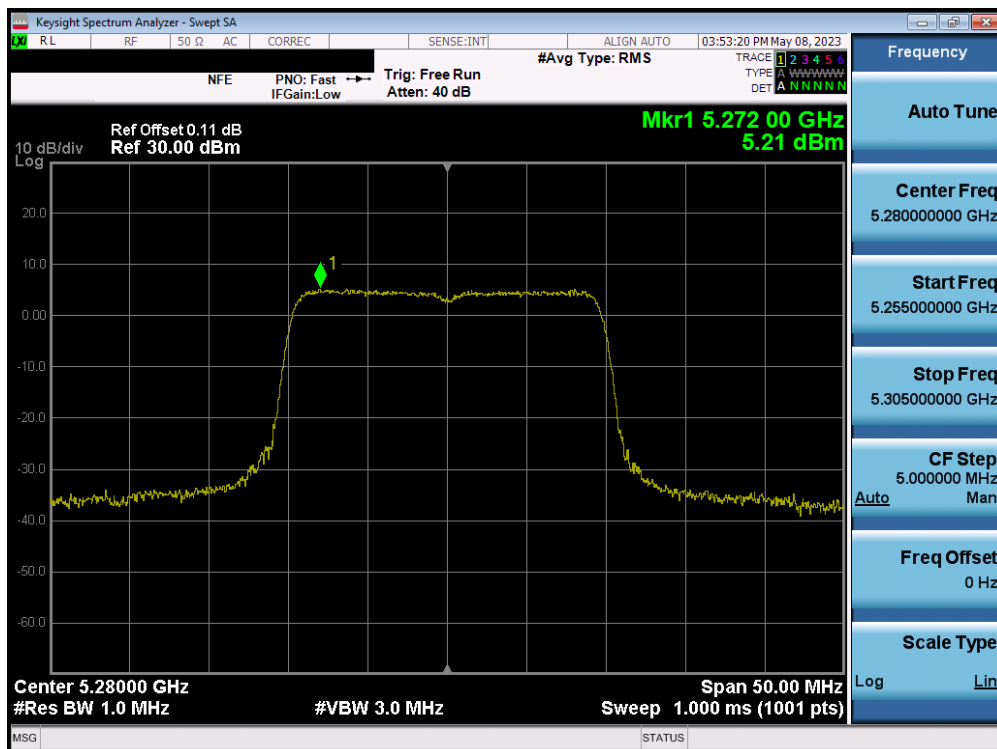


Plot 7-273. Power Spectral Density Plot MIMO ANT2 (20MHz BW 802.11ax – Full Tones (UNII Band 2A) – Ch. 56)

FCC ID: A3LSMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-07.A3L	Test Dates: 04/03/2023 - 05/12/2023	EUT Type: Portable Tablet	Page 172 of 235

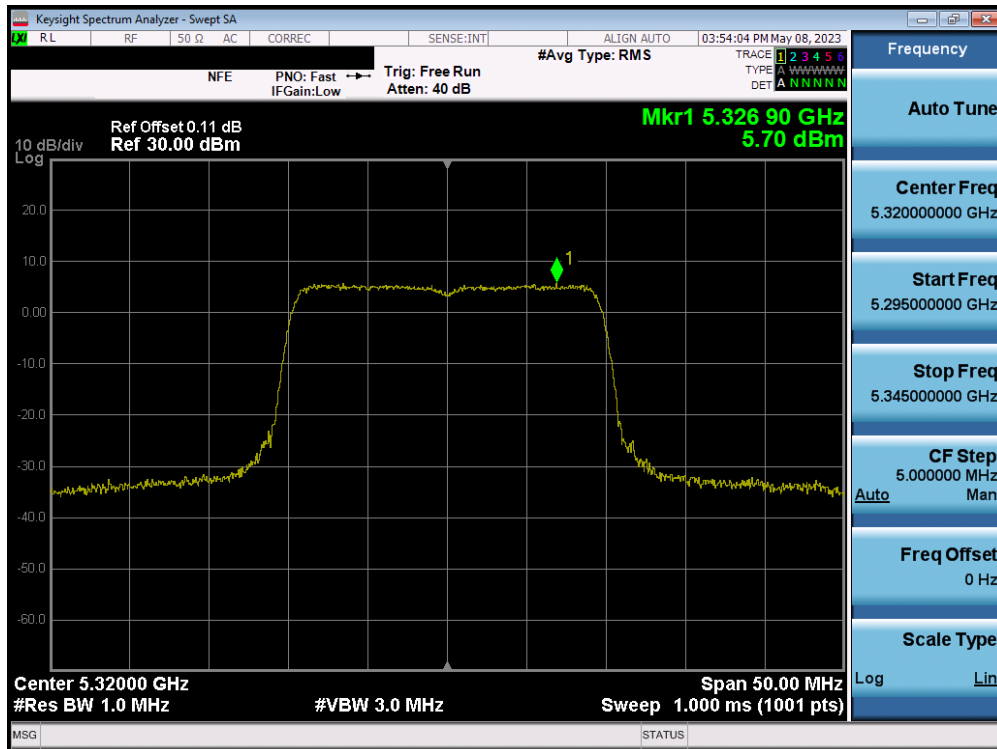


Plot 7-274. Power Spectral Density Plot MIMO ANT2 (20MHz BW 802.11ax – Full Tones (UNII Band 2A) – Ch. 64)

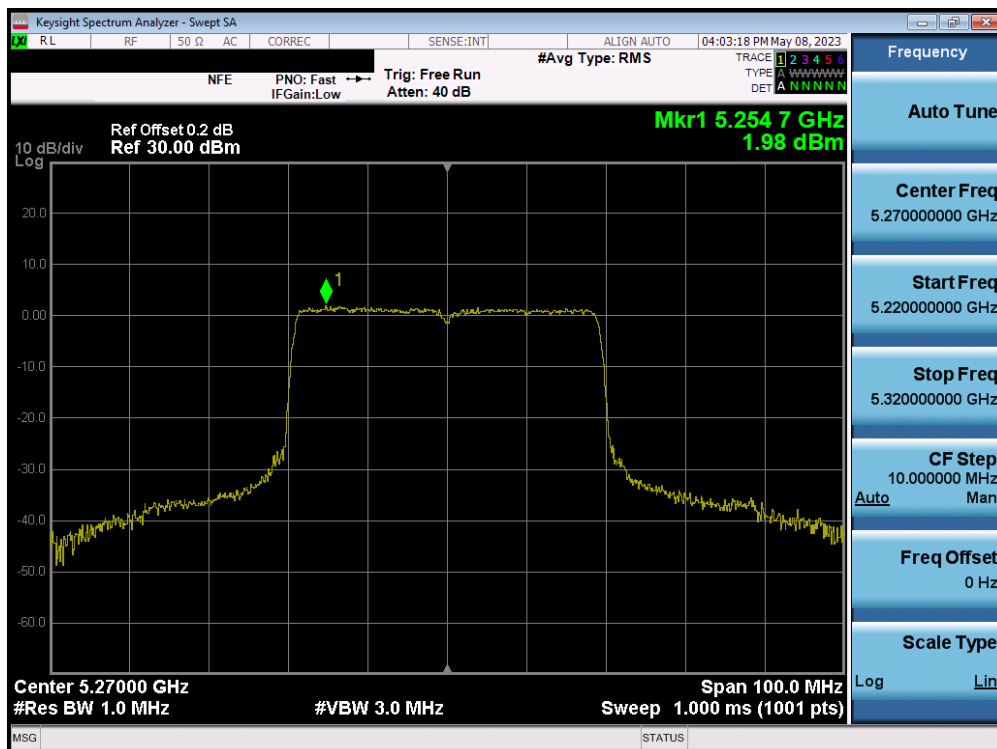


Plot 7-275. Power Spectral Density Plot MIMO ANT2 (40MHz BW 802.11ax – Full Tones (UNII Band 2A) – Ch. 54)

FCC ID: A3LSMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-07.A3L	Test Dates: 04/03/2023 - 05/12/2023	EUT Type: Portable Tablet	Page 173 of 235

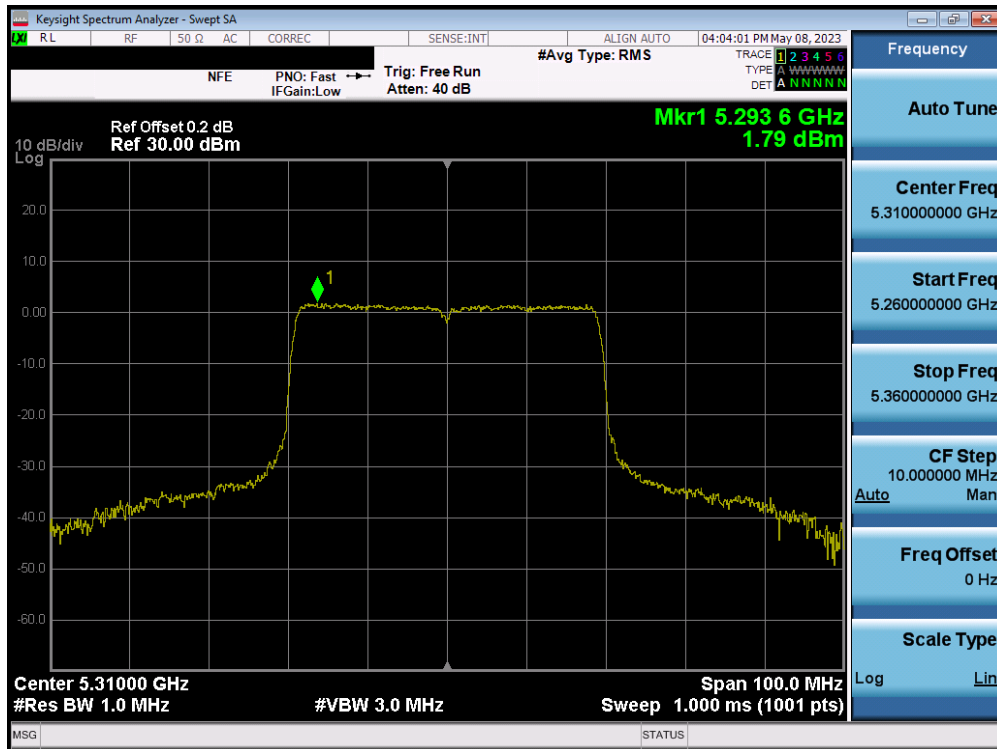


Plot 7-276. Power Spectral Density Plot MIMO ANT2 (40MHz BW 802.11ax – Full Tones (UNII Band 2A) – Ch. 62)

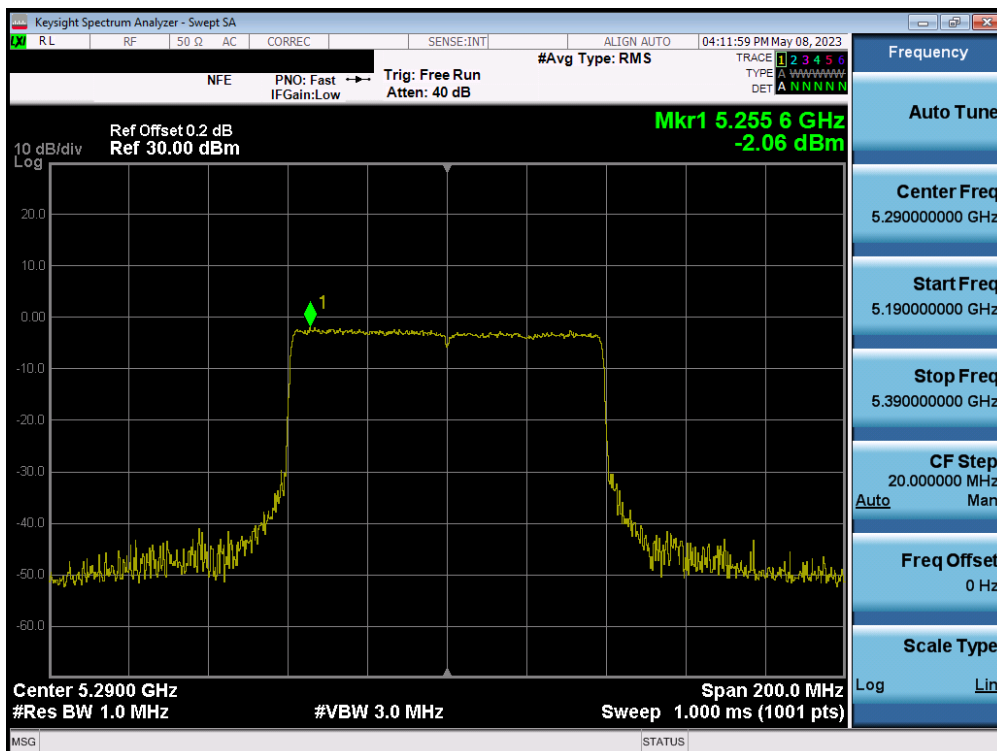


Plot 7-277. Power Spectral Density Plot MIMO ANT2 (80MHz BW 802.11ax – Full Tones (UNII Band 2A) – Ch. 58)

FCC ID: A3LSMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-07.A3L	Test Dates: 04/03/2023 - 05/12/2023	EUT Type: Portable Tablet	Page 174 of 235

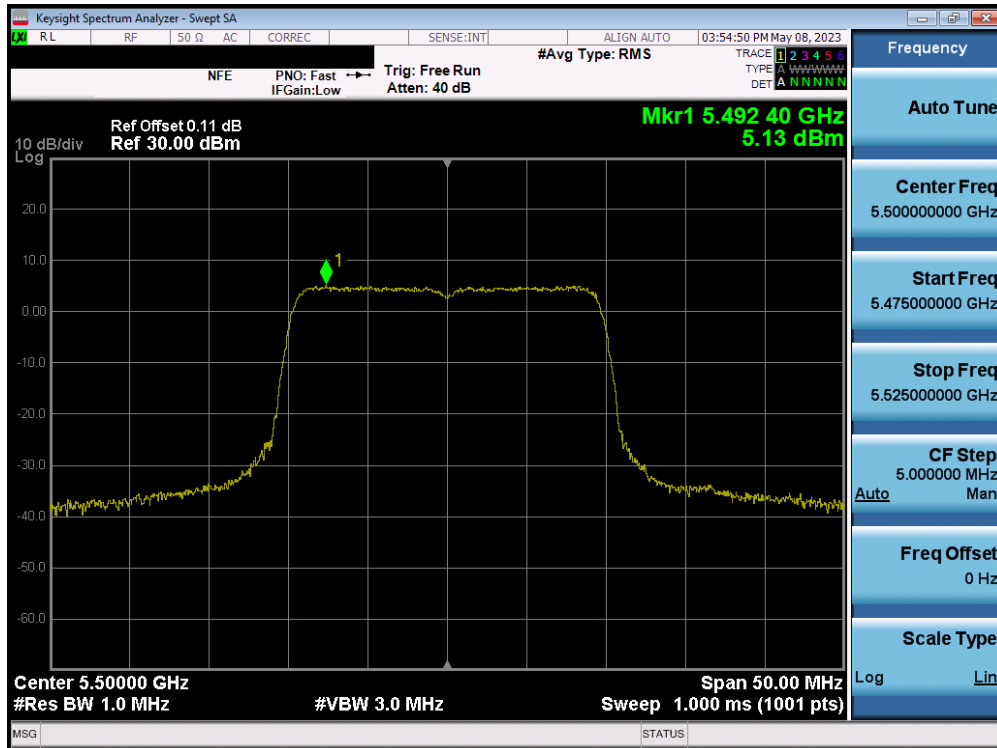


Plot 7-278. Power Spectral Density Plot MIMO ANT2 (20MHz BW 802.11ax – Full Tones (UNII Band 2C) – Ch. 100)

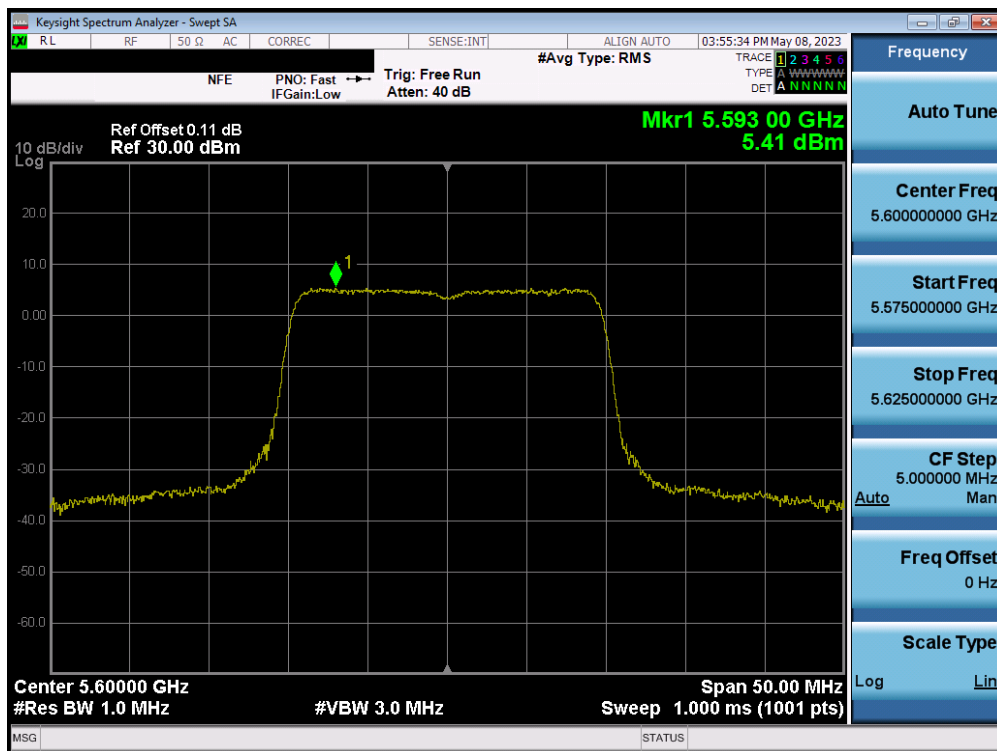


Plot 7-279. Power Spectral Density Plot MIMO ANT2 (20MHz BW 802.11ax – Full Tones (UNII Band 2C) – Ch. 120)

FCC ID: A3LSMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-07.A3L	Test Dates: 04/03/2023 - 05/12/2023	EUT Type: Portable Tablet	Page 175 of 235

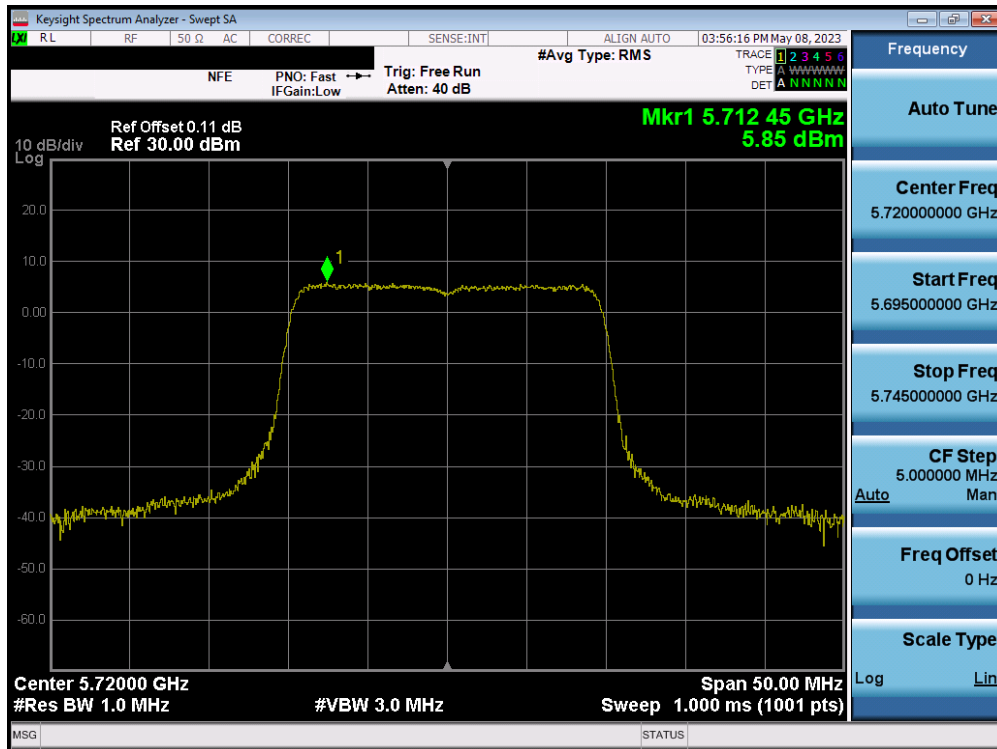


Plot 7-280. Power Spectral Density Plot MIMO ANT2 (20MHz BW 802.11ax – Full Tones (UNII Band 2C) – Ch. 144)

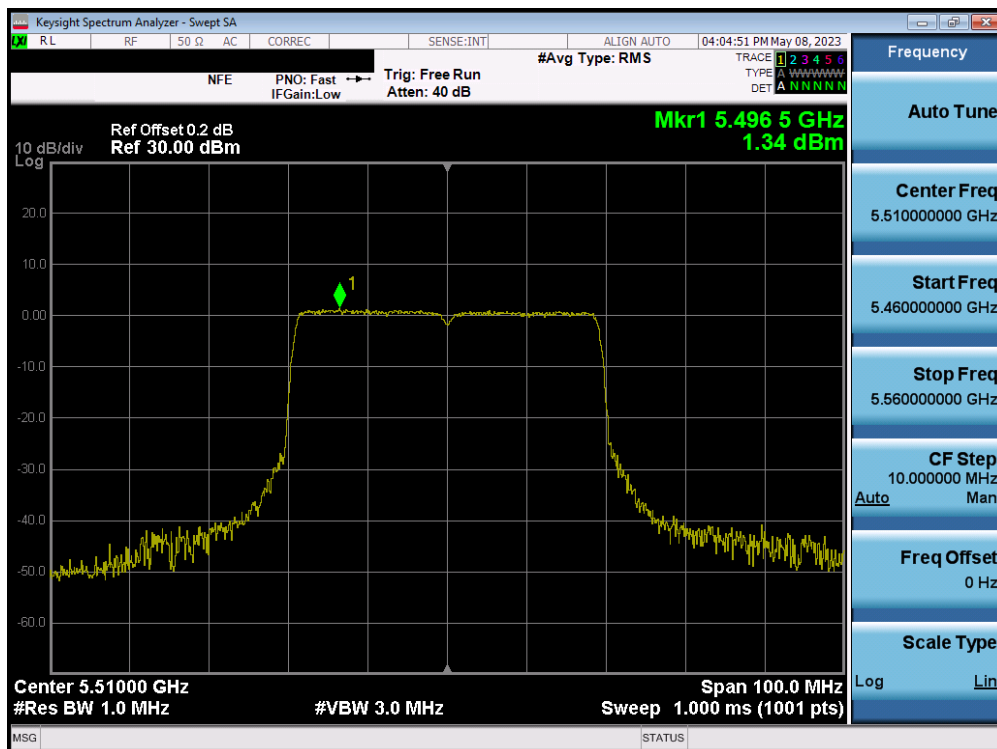


Plot 7-281. Power Spectral Density Plot MIMO ANT2 (40MHz BW 802.11ax – Full Tones (UNII Band 2C) – Ch. 102)

FCC ID: A3LSMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-07.A3L	Test Dates: 04/03/2023 - 05/12/2023	EUT Type: Portable Tablet	Page 176 of 235

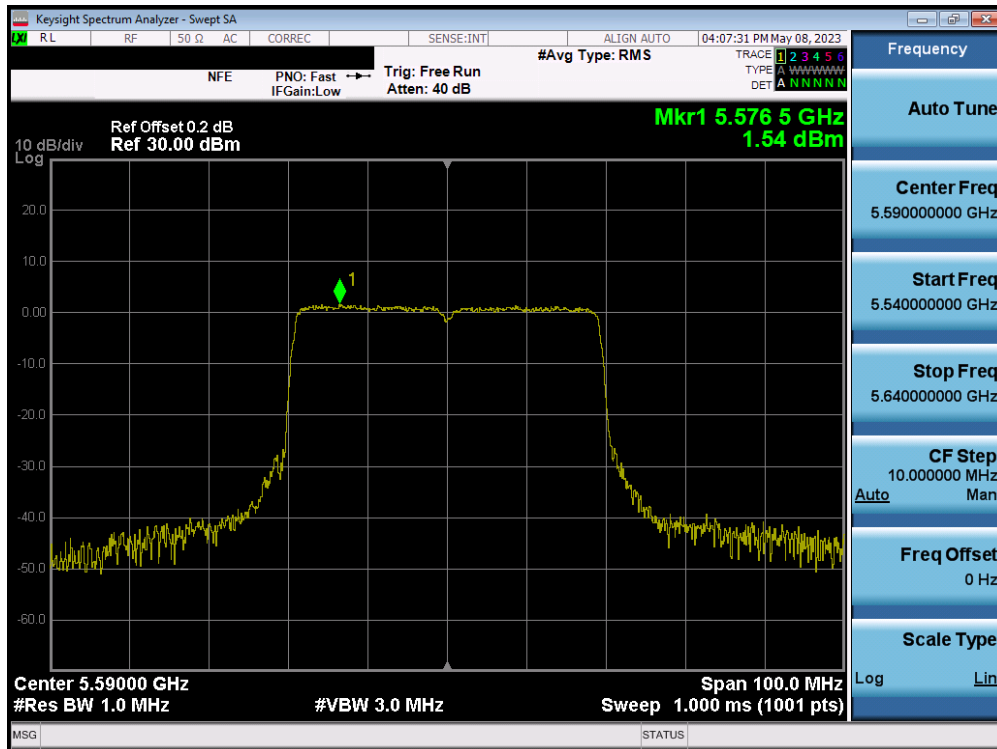


Plot 7-282. Power Spectral Density Plot MIMO ANT2 (40MHz BW 802.11ax – Full Tones (UNII Band 2C) – Ch. 118)

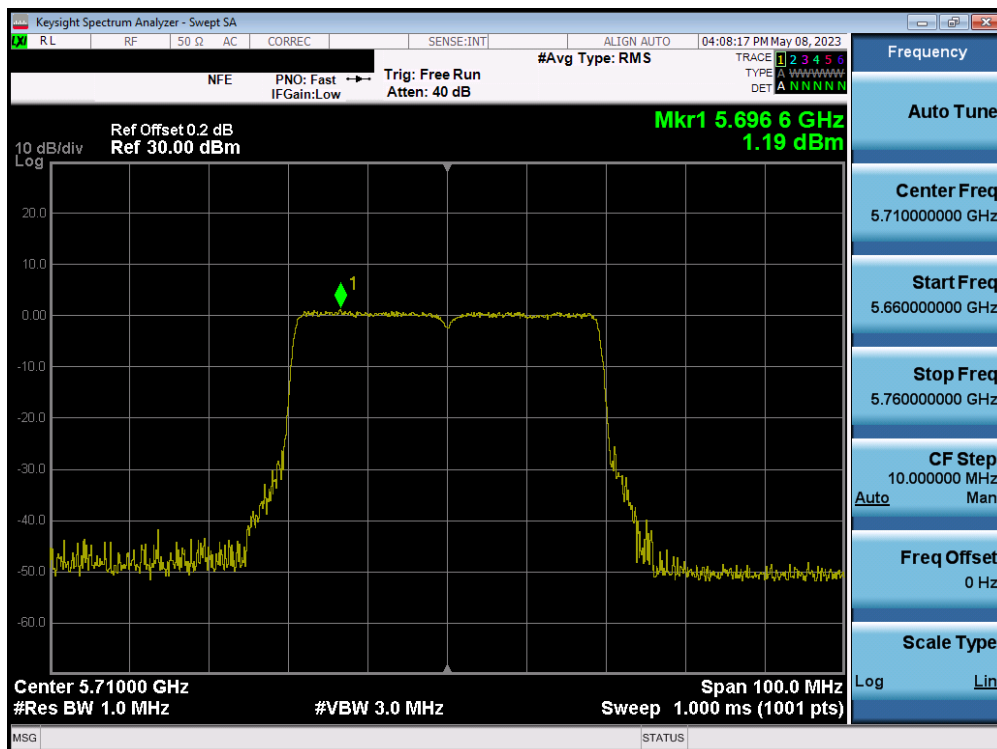


Plot 7-283. Power Spectral Density Plot MIMO ANT2 (40MHz BW 802.11ax – Full Tones (UNII Band 2C) – Ch. 142)

FCC ID: A3LSMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-07.A3L	Test Dates: 04/03/2023 - 05/12/2023	EUT Type: Portable Tablet	Page 177 of 235

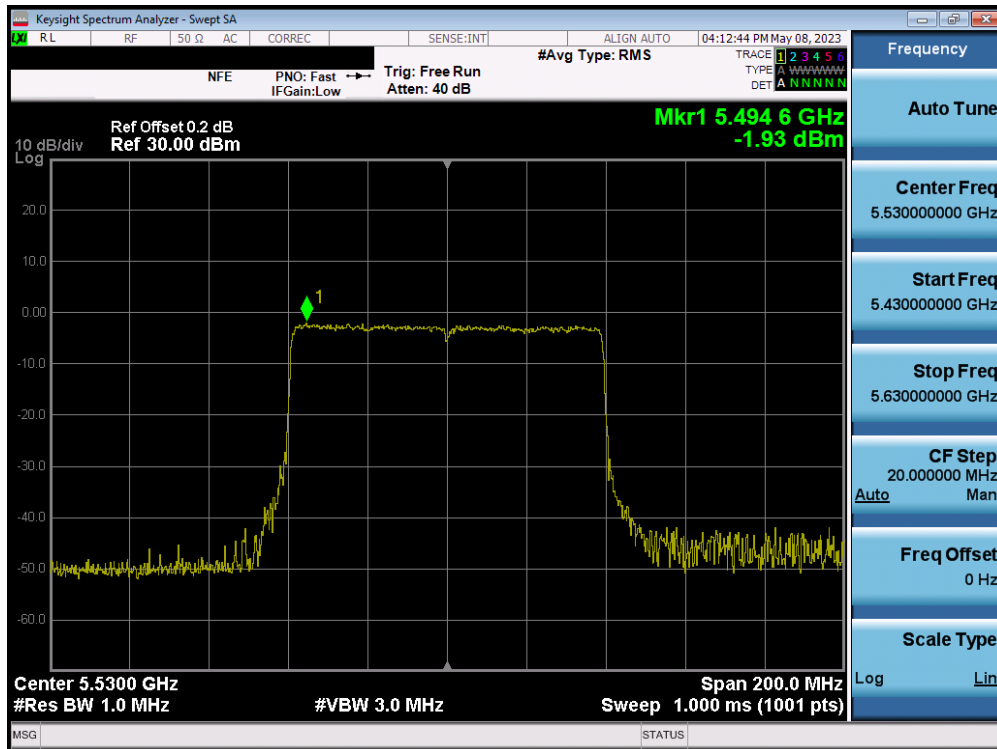


Plot 7-284. Power Spectral Density Plot MIMO ANT2 (80MHz BW 802.11ax – Full Tones (UNII Band 2C) – Ch. 106)

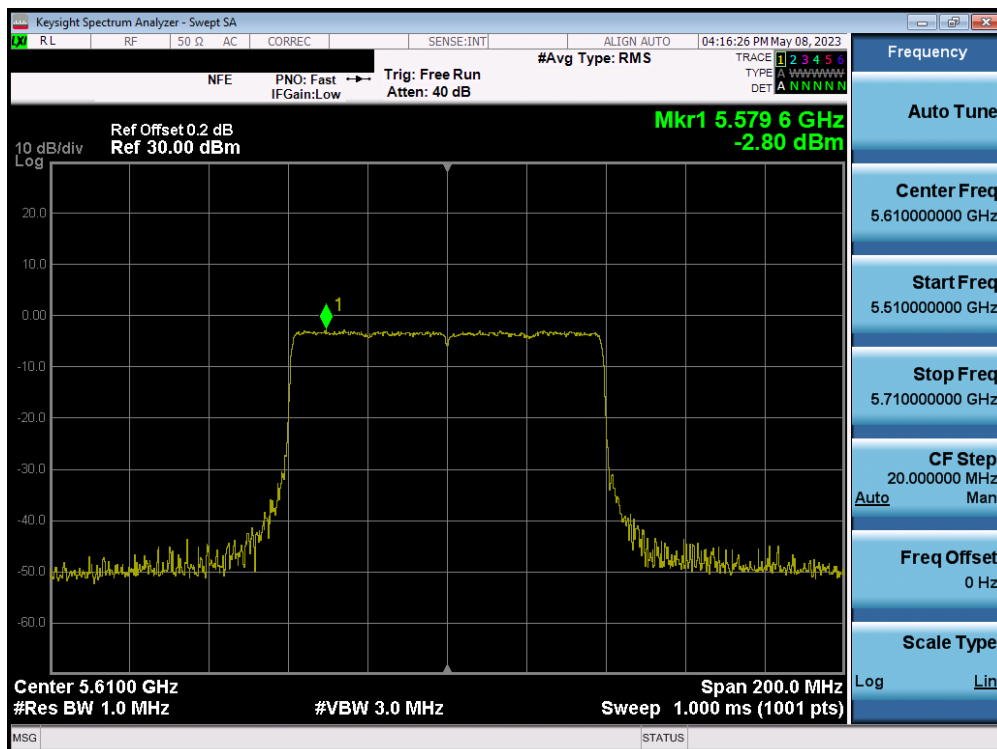


Plot 7-285. Power Spectral Density Plot MIMO ANT2 (80MHz BW 802.11ax – Full Tones (UNII Band 2C) – Ch. 122)

FCC ID: A3LSMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-07.A3L	Test Dates: 04/03/2023 - 05/12/2023	EUT Type: Portable Tablet	Page 178 of 235

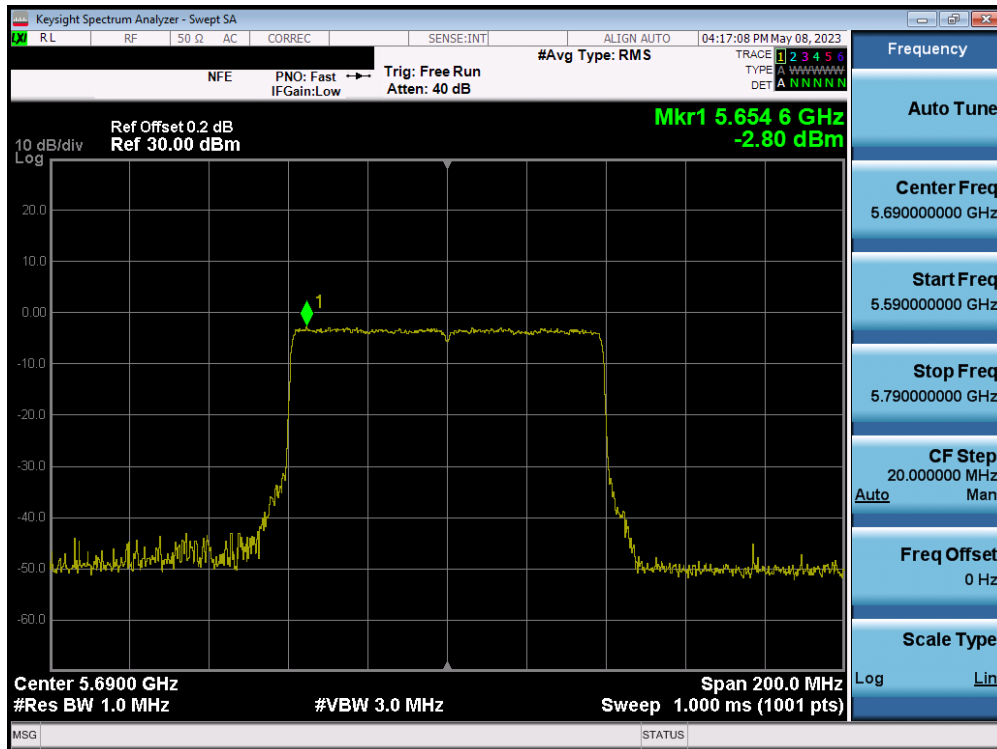


Plot 7-286. Power Spectral Density Plot MIMO ANT2 (80MHz BW 802.11ax – Full Tones (UNII Band 2C) – Ch. 138)

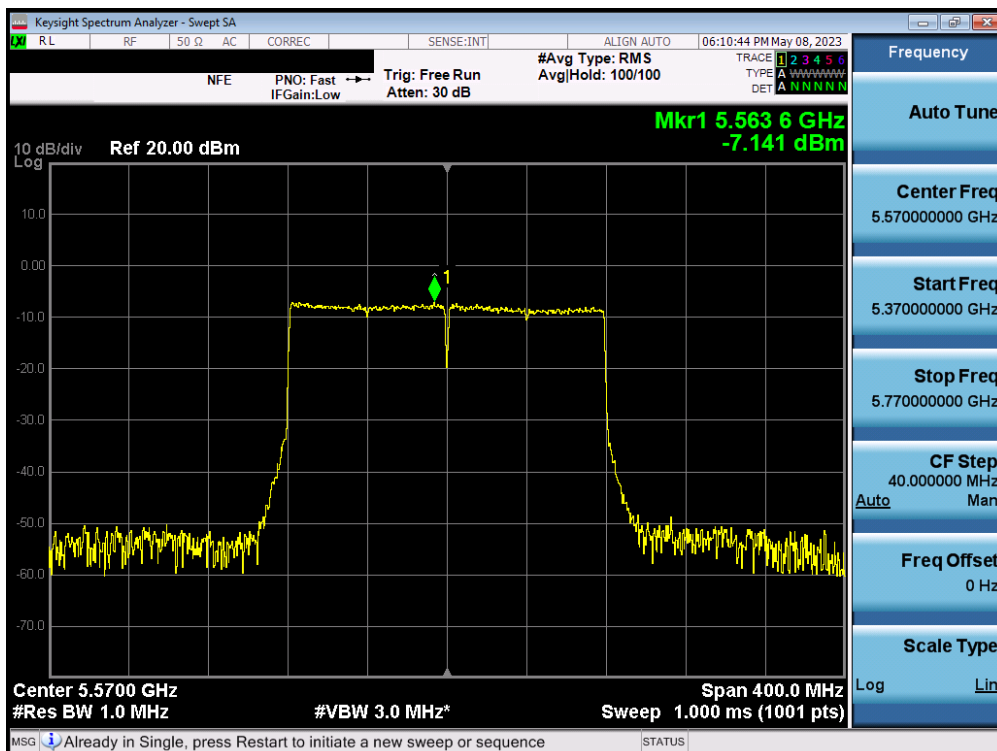


Plot 7-287. Power Spectral Density Plot MIMO ANT2 (160MHz BW 802.11ax – Full Tones (UNII Band 2C) – Ch. 114)

FCC ID: A3LSMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-07.A3L	Test Dates: 04/03/2023 - 05/12/2023	EUT Type: Portable Tablet	Page 179 of 235

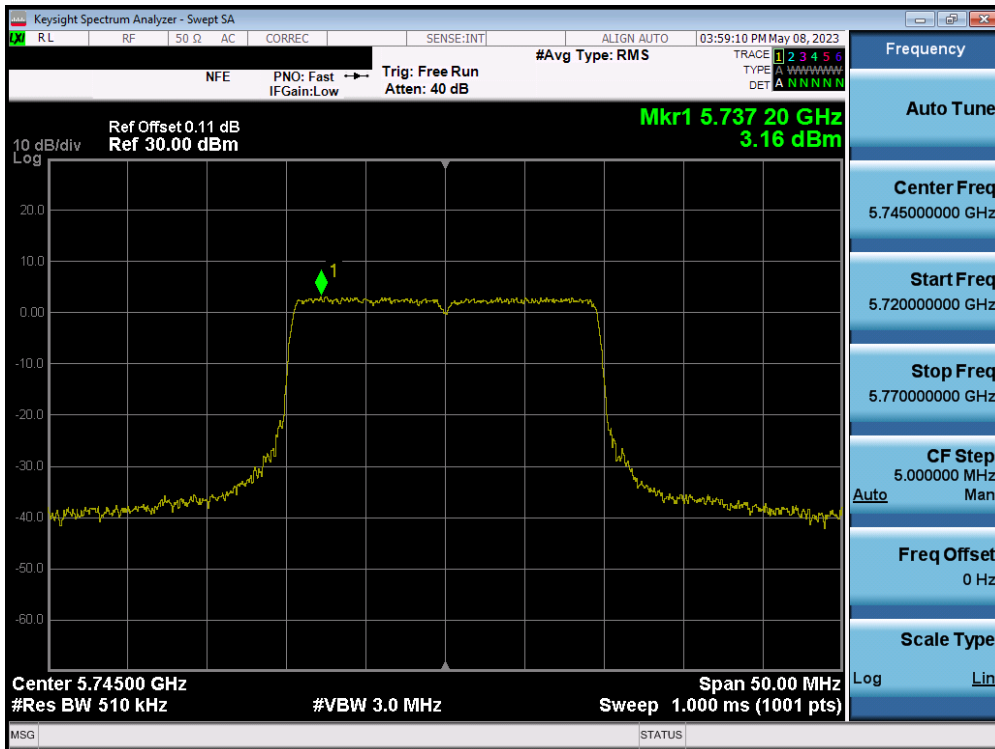


Plot 7-288. Power Spectral Density Plot MIMO ANT2 (20MHz BW 802.11ax – Full Tones (UNII Band 3) – Ch. 149)

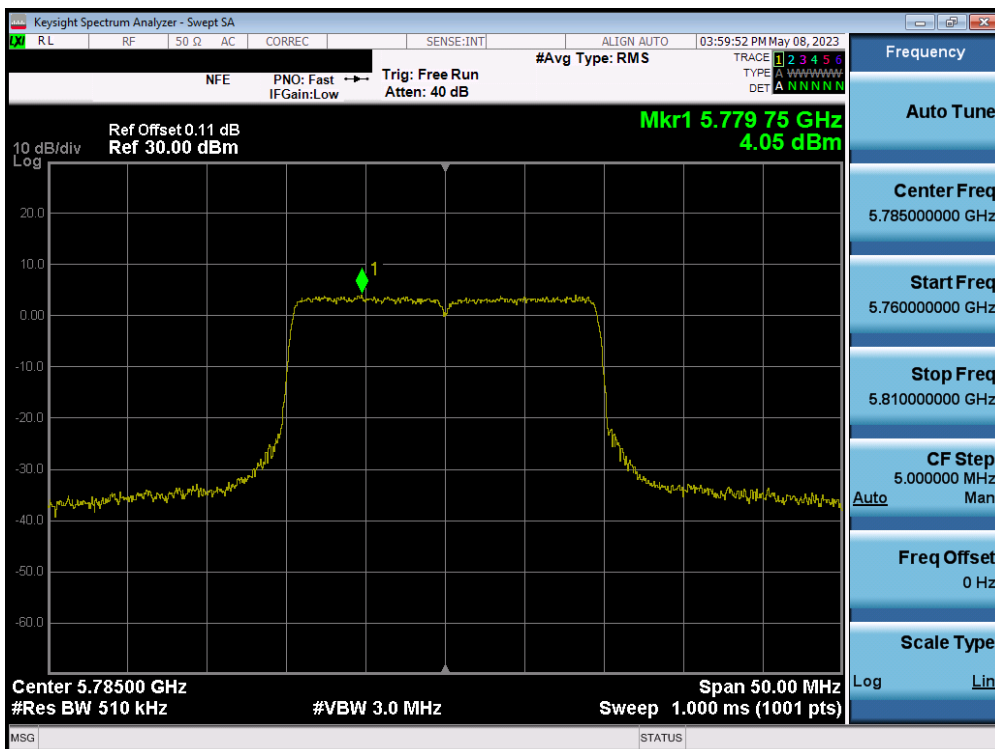


Plot 7-289. Power Spectral Density Plot MIMO ANT2 (20MHz BW 802.11ax – Full Tones (UNII Band 3) – Ch. 157)

FCC ID: A3LSMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-07.A3L	Test Dates: 04/03/2023 - 05/12/2023	EUT Type: Portable Tablet	Page 180 of 235

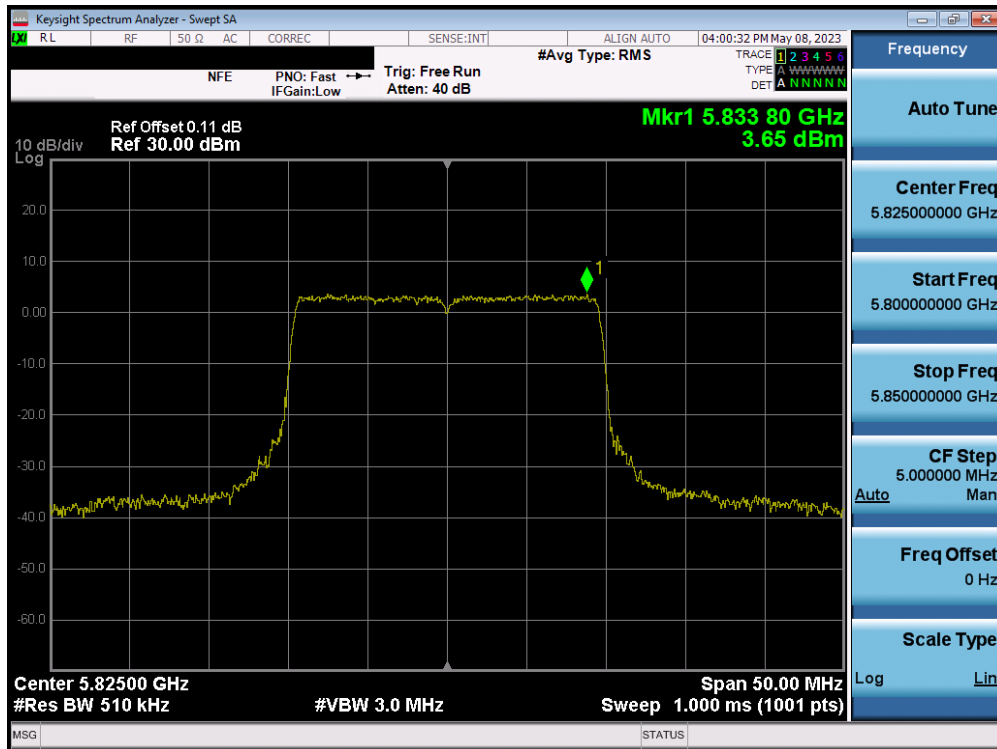


Plot 7-290. Power Spectral Density Plot MIMO ANT2 (20MHz BW 802.11ax – Full Tones (UNII Band 3) – Ch. 165)

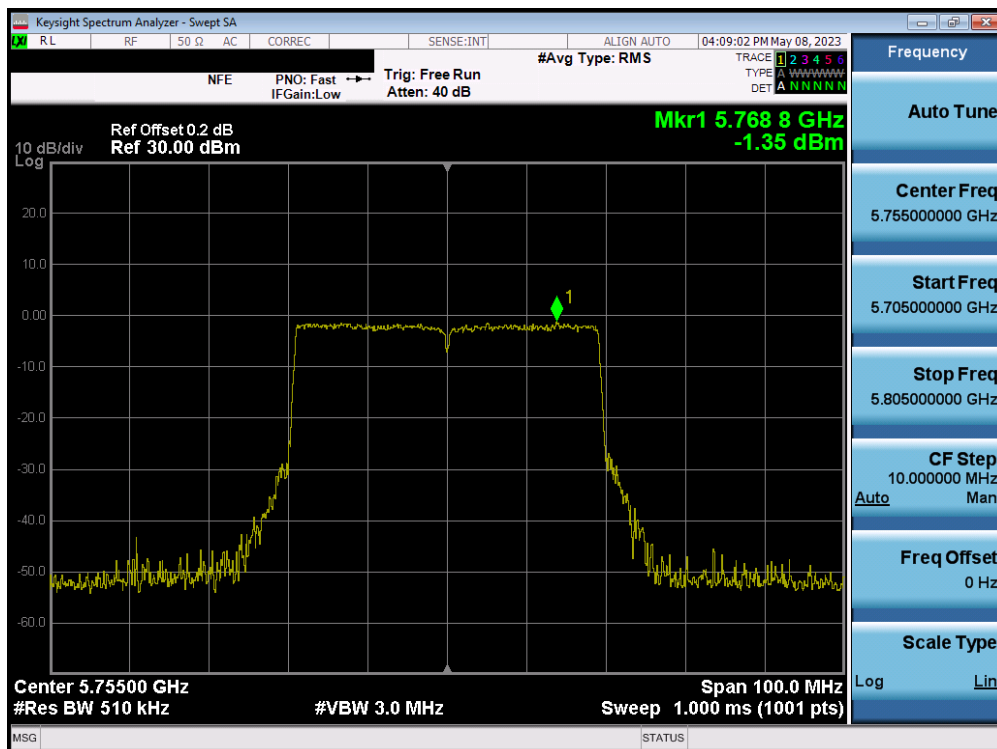


Plot 7-291. Power Spectral Density Plot MIMO ANT2 (40MHz BW 802.11ax – Full Tones (UNII Band 3) – Ch. 151)

FCC ID: A3LSMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-07.A3L	Test Dates: 04/03/2023 - 05/12/2023	EUT Type: Portable Tablet	Page 181 of 235

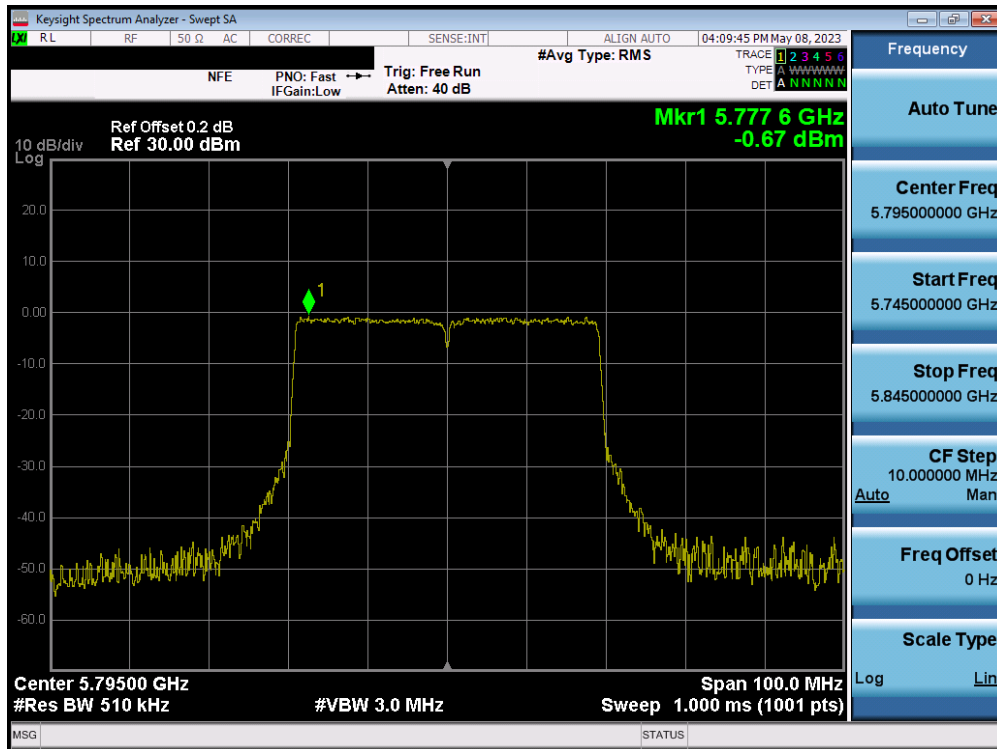


Plot 7-292. Power Spectral Density Plot MIMO ANT2 (40MHz BW 802.11ax – Full Tones (UNII Band 3) – Ch. 159)

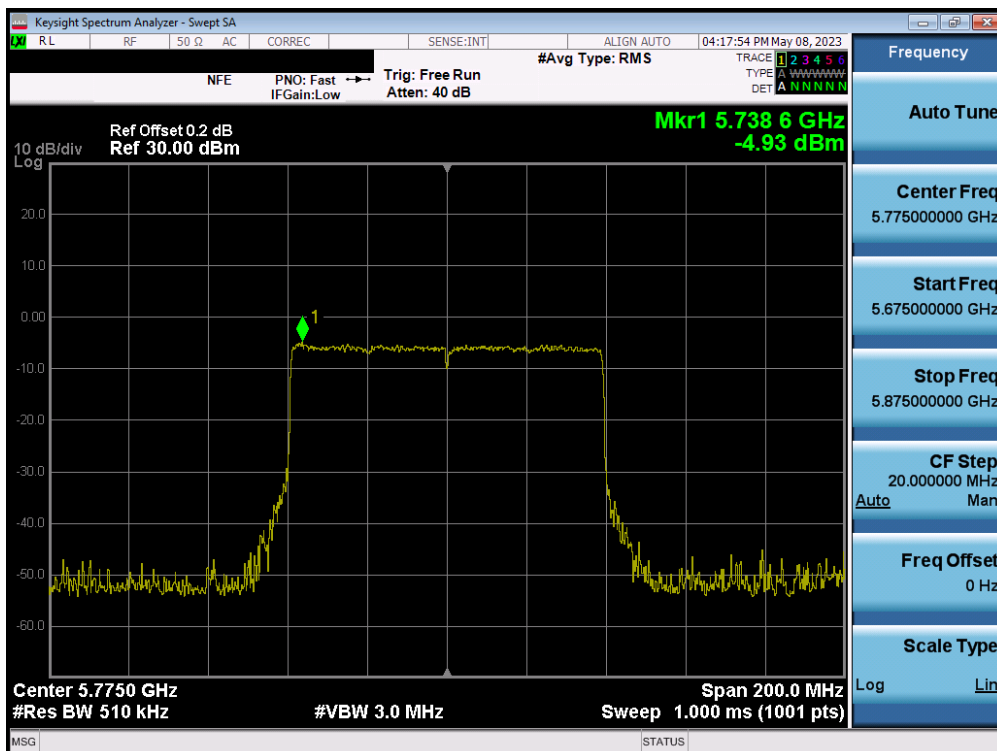


Plot 7-293. Power Spectral Density Plot MIMO ANT2 (80MHz BW 802.11ax – Full Tones (UNII Band 3) – Ch. 155)

FCC ID: A3LSMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-07.A3L	Test Dates: 04/03/2023 - 05/12/2023	EUT Type: Portable Tablet	Page 182 of 235

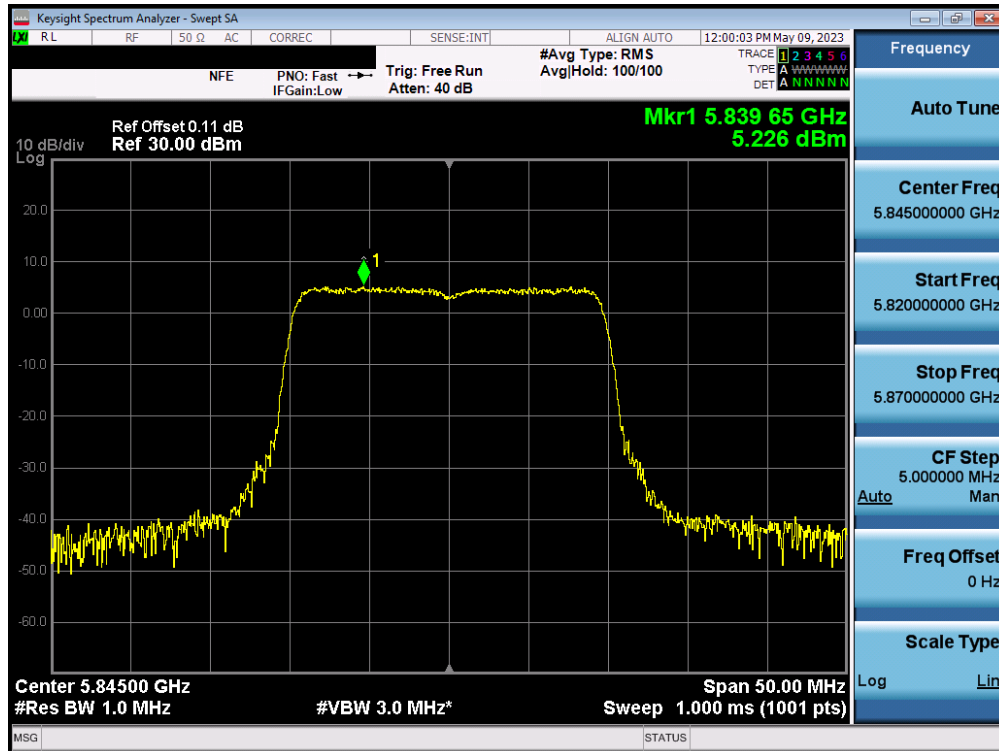


Plot 7-294. Power Spectral Density Plot MIMO ANT2 (20MHz BW 802.11ax – Full Tones (UNII Band 3/4) – Ch. 169)

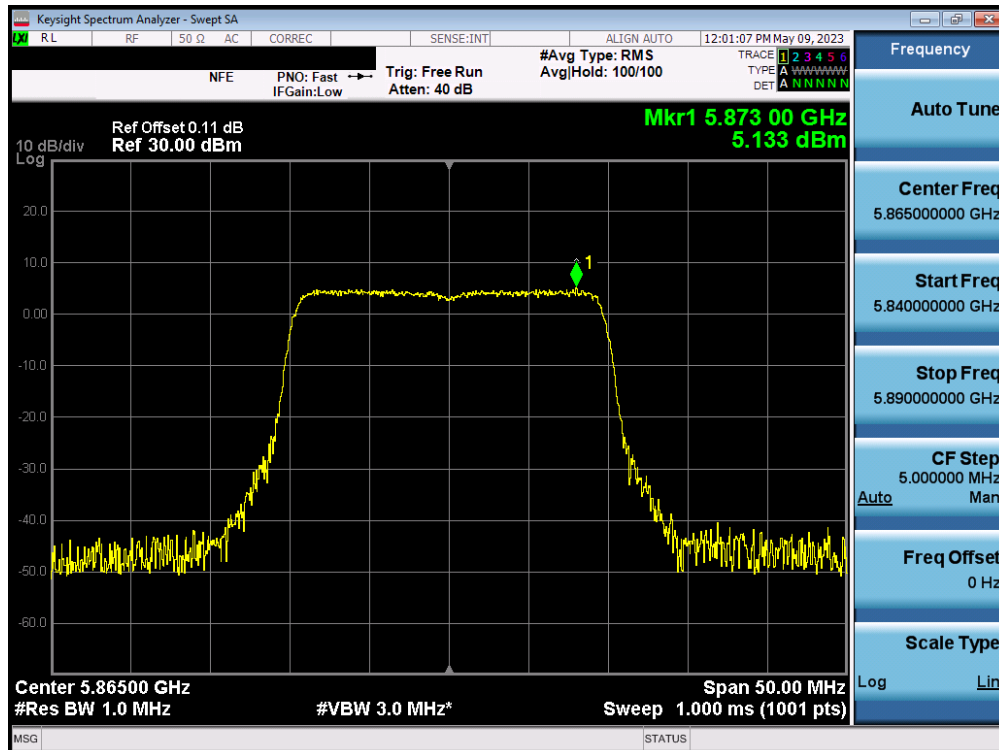


Plot 7-295. Power Spectral Density Plot MIMO ANT2 (20MHz BW 802.11ax – Full Tones (UNII Band 4) – Ch. 173)

FCC ID: A3LSMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-07.A3L	Test Dates: 04/03/2023 - 05/12/2023	EUT Type: Portable Tablet	Page 183 of 235

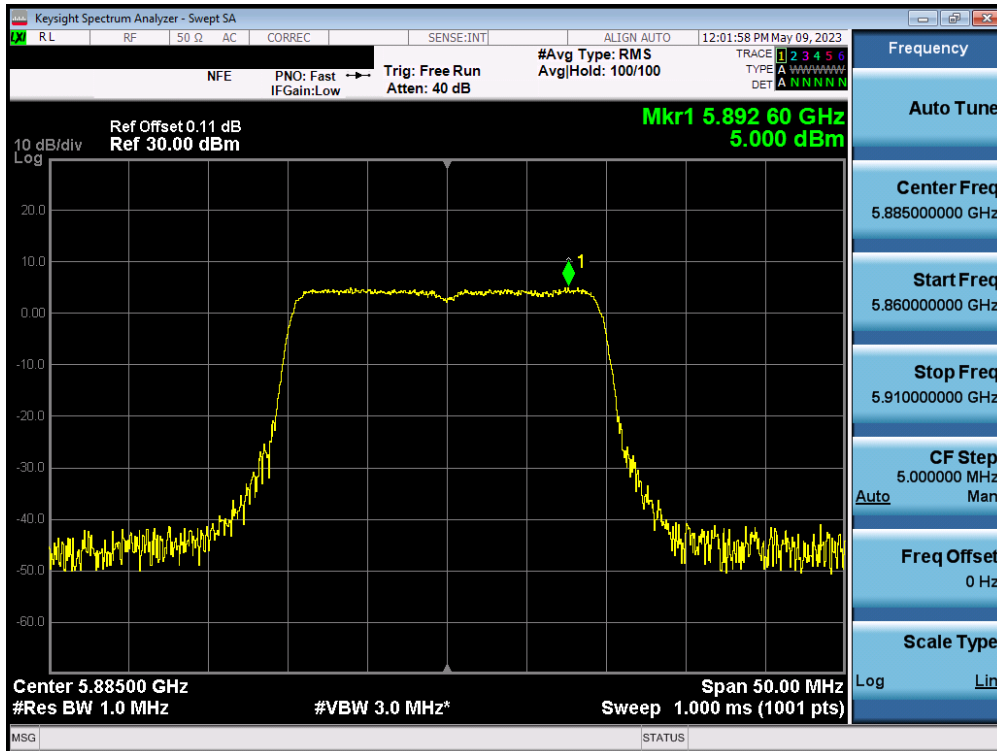


Plot 7-296. Power Spectral Density Plot MIMO ANT2 (20MHz BW 802.11ax – Full Tones (UNII Band 4) – Ch. 177)

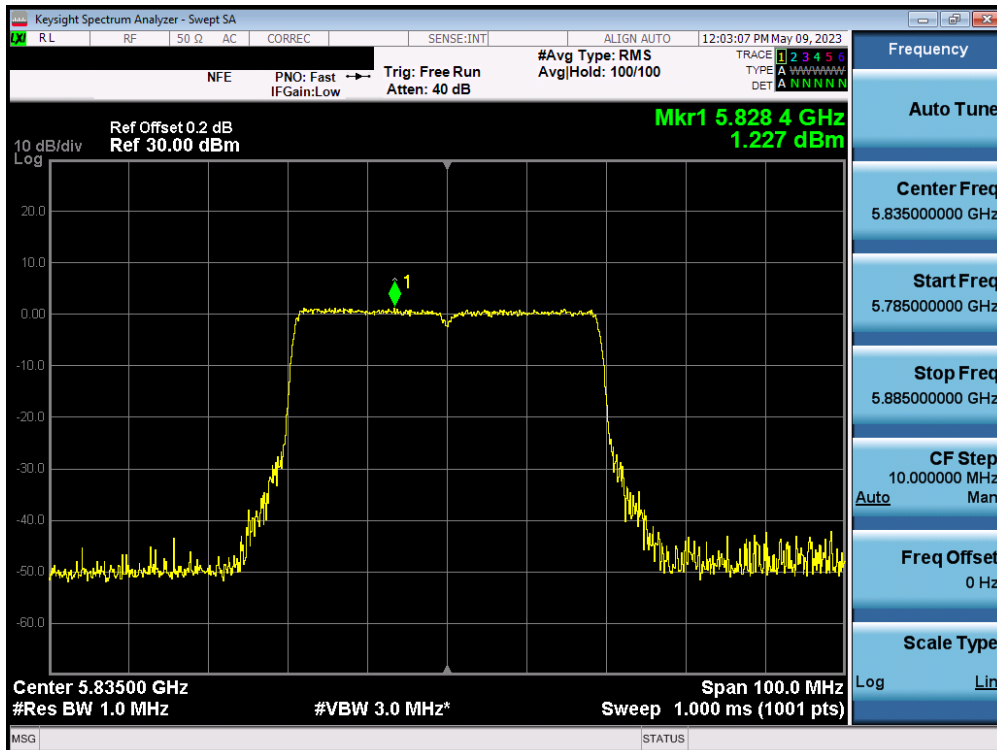


Plot 7-297. Power Spectral Density Plot MIMO ANT2 (40MHz BW 802.11ax – Full Tones (UNII Band 3/4) – Ch. 167)

FCC ID: A3LSMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-07.A3L	Test Dates: 04/03/2023 - 05/12/2023	EUT Type: Portable Tablet	Page 184 of 235

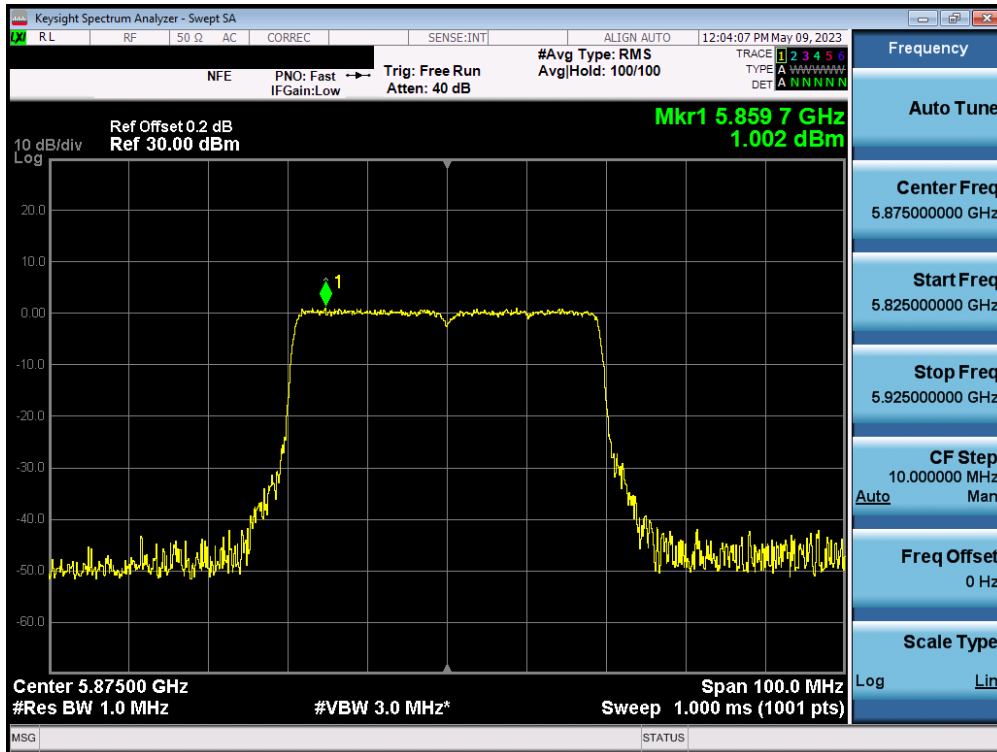


Plot 7-298. Power Spectral Density Plot MIMO ANT2 (40MHz BW 802.11ax – Full Tones (UNII Band 4) – Ch. 175)

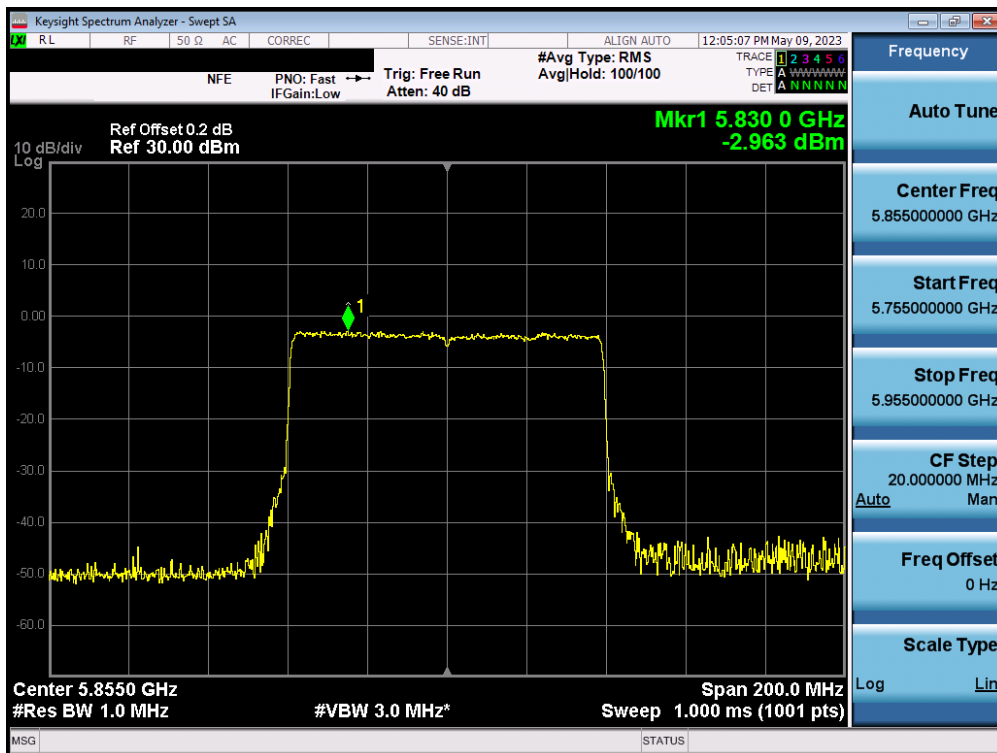

Plot 7-299. Power Spectral Density Plot MIMO ANT2 (80MHz BW 802.11ax – Full Tones (UNII Band 3/4) – Ch. 171)

FCC ID: A3LSMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-07.A3L	Test Dates: 04/03/2023 - 05/12/2023	EUT Type: Portable Tablet	Page 185 of 235

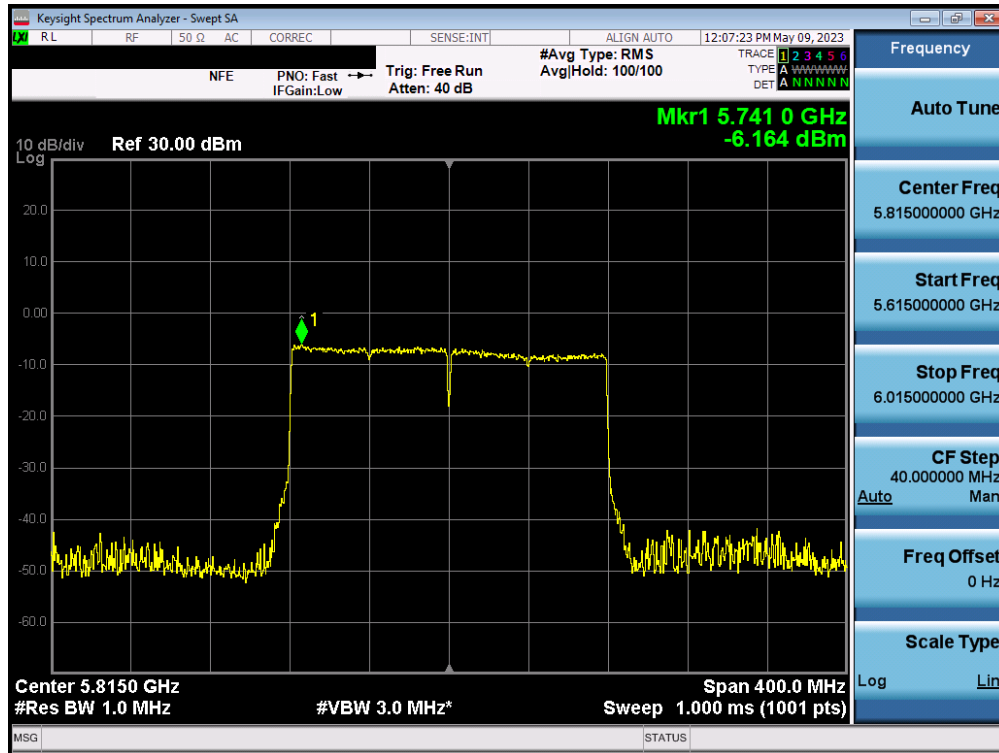

Plot 7-300. Power Spectral Density Plot MIMO ANT2 (160MHz BW 802.11ax – Full Tones (UNII Band 3/4) – Ch. 163)

FCC ID: A3LSMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-07.A3L	Test Dates: 04/03/2023 - 05/12/2023	EUT Type: Portable Tablet	Page 186 of 235



Note:

Per ANSI C63.10-2013 Section 14.3.2.2 and KDB 662911 v02r01 Section E)2), the power spectral density at Antenna-1 and Antenna-2 were first measured separately with reduced Antenna-1 and Antenna-2 powers per manufacture’s tune-up document. The measured values were then summed in linear power units then converted back to dBm.

Sample Directional Gain Calculation:

Assuming the antenna gain is -5.65 dBi for Antenna-1 and -6.89 dBi for Antenna-2.

$$\begin{aligned}
\text{Directional gain} &= 10 \log[(10^{G_1/20} + 10^{G_2/20} + \dots + 10^{G_N/20})^2 / N_{\text{ANT}}] \text{ dBi} \\
&= 10 \log[(10^{-8.61/20} + 10^{-7.68/20} / 2)] \text{ dBi} \\
&= (-3.24) \text{ dBi}
\end{aligned}$$

Sample MIMO Calculation:

Assuming the average conducted power spectral density was measured to be 6.06 dBm for Antenna-1 and 5.23 dBm for Antenna-2.

$$\begin{aligned}
&\text{Antenna-1} + \text{Antenna-2} = \text{MIMO} \\
(7.88 \text{ dBm} + 7.10 \text{ dBm}) &= (6.14 \text{ mW} + 5.13 \text{ mW}) = 11.27 \text{ mW} = 10.52 \text{ dBm}
\end{aligned}$$

Sample e.i.r.p Power Spectral Density Calculation:

Assuming the average MIMO power density was calculated to be 9.09 dBm with directional gain of -3.24 dBi.

$$\begin{aligned}
\text{e.i.r.p. Power Spectral Density(dBm)} &= \text{Power Spectral Density (dBm)} + \text{directional gain (dBi)} \\
10.52 \text{ dBm} + (-3.24) \text{ dBi} &= 7.28 \text{ dBm}
\end{aligned}$$

FCC ID: A3LSMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-07.A3L	Test Dates: 04/03/2023 - 05/12/2023	EUT Type: Portable Tablet	Page 187 of 235

7.6 Radiated Emission Measurements

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, and at the appropriate frequencies. All channels, modes, and modulations/data rates were investigated among all UNII bands. Only the radiated emissions of the configuration that produced the worst-case emissions are reported in this section.

For transmitters operating in the 5.15-5.25 GHz and 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz.

For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an EIRP of -27 dBm/MHz.

For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

For transmitters operating in the 5.850 – 5.895 GHz band: all emissions at or above 5.895GHz shall not exceed an e.i.r.p. of -5dBm/MHz and shall decrease linearly up to an e.i.r.p. of -27dBm/MHz at or above 5.925GHz, and all emissions below 5.725 GHz shall not exceed an e.i.r.p. of -27dBm/MHz at 5.65 GHz increasing linearly to 10dBm/MHz at 5.7GHz and from 5.7GHz increasing linearly to a level of 15.6dBm/MHz at 5.72GHz, and from 5.72GHz increasing linearly to a level of 27dBm/MHz at 5.725GHz.

All out of band emissions appearing in a restricted band as specified in FCC §15.205 of the Title 47 CFR and Table 6 of RSS-Gen (8.10) must not exceed the limits shown in the table below per FCC §15.209 and RSS-Gen (8.9).

Frequency	Field Strength [μ V/m]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400\F (kHz)	300
0.490 – 1.705 MHz	24000\F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-48. Radiated Limits

Test Procedures Used

ANSI C63.10-2013 – Sections 12.7.7.2, 12.7.6, 12.7.5 (Radiated Spurious Emissions)

ANSI C63.10-2013 – Section 12.7.4.4 (Band Edge Measurements)

FCC ID: A3LSMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-07.A3L	Test Dates: 04/03/2023 - 05/12/2023	EUT Type: Portable Tablet	Page 188 of 235

Test Settings – Above 1GHz

Average Field Strength Measurements (Method AD – Average Detection)

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest.
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = power average (RMS)
5. Number of measurement points = 1001 (Number of points must be $\geq 2 \times \text{span} \backslash \backslash \text{RBW}$)
6. Sweep time = auto
7. Trace (RMS) averaging was performed over at least 100 traces.

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest.
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize.

Test Settings – Below 1GHz

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest.
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize.

FCC ID: A3LSMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-07.A3L	Test Dates: 04/03/2023 - 05/12/2023	EUT Type: Portable Tablet	Page 189 of 235

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

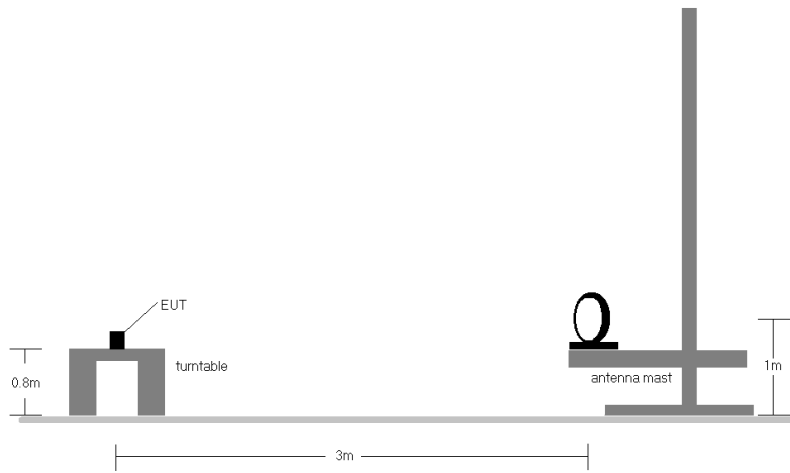


Figure 7-5. Radiated Test Setup < 30MHz

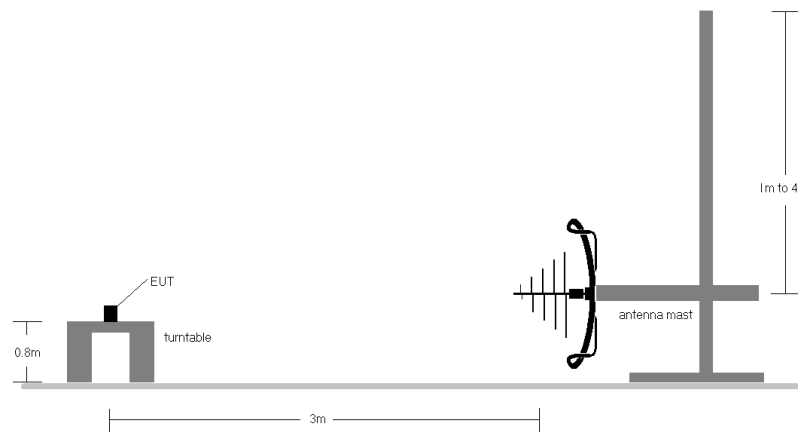


Figure 7-6. Radiated Test Setup < 1GHz

FCC ID: A3LSMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-07.A3L	Test Dates: 04/03/2023 - 05/12/2023	EUT Type: Portable Tablet	Page 190 of 235

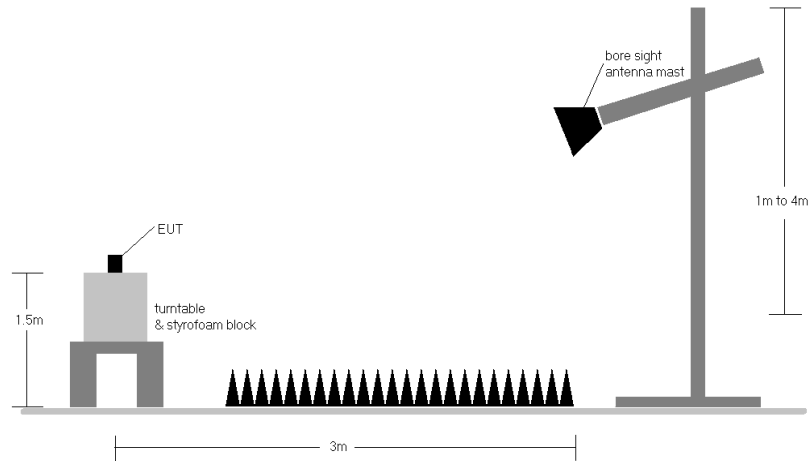


Figure 7-7. Radiated Test Setup > 1GHz

Test Notes

1. All spurious emissions lying in restricted bands specified in §15.205 are below the limit shown in §15.209. All spurious emissions that do not lie in a restricted band are subject to an average limit of -27dBm/MHz. At 3 meters, the field strength limit in dB μ V/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions of 68.2dB μ V/m.
2. All spurious emissions that do not lie in a restricted band are subject to a peak limit not to exceed 20dB of the average limit [68.2dB μ V/m]. If a peak measurement passes the average limit, it was determined no further investigation is necessary.
3. The antenna is manipulated through typical positions, polarity, and length during the tests. The EUT is manipulated through three orthogonal planes.
4. This unit was tested with its standard battery.
5. The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. Above 1 GHz, average and peak measurements were taken using linearly polarized horn antennas. The worst-case emissions are reported, however emissions whose levels were not within 20dB of the respective limits were not reported.
6. Emissions below 18GHz were measured at a 3-meter test distance while emissions above 18GHz were measured at a 1-meter test distance with the application of a distance correction factor.
7. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. Any emissions found to be within 20dB of the limit are fully investigated and the results are shown in this section.
8. The "-" shown in the following RSE tables are used to denote a noise floor measurement.
9. In the case where a peak-detector measurement passed the given RMS limit it was determined sufficient to demonstrate compliance.

FCC ID: A3LSMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-07.A3L	Test Dates: 04/03/2023 - 05/12/2023	EUT Type: Portable Tablet	Page 191 of 235

10. The results recorded using the broadband antenna are known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
11. For radiated measurements, emissions were investigated for the fully-loaded RU configuration and for all of the partially-loaded RU configurations. Among all of the available partially-loaded RU configurations, only the configuration with the worst case emissions is reported.

Sample Calculations

Determining Spurious Emissions Levels


- Field Strength Level $_{[dB\mu V/m]} = \text{Analyzer Level }_{[dBm]} + 107 + \text{AFCL }_{[dB/m]}$
- $\text{AFCL }_{[dB/m]} = \text{Antenna Factor }_{[dB/m]} + \text{Cable Loss }_{[dB]}$
- $\text{Margin }_{[dB]} = \text{Field Strength Level }_{[dB\mu V/m]} - \text{Limit }_{[dB\mu V/m]}$

Radiated Band Edge Measurement Offset


- The amplitude offset shown in the radiated restricted band edge plots in Section Radiated Spurious Emission Measurements – Above 1GHz was calculated using the formula:
Offset (dB) = (Antenna Factor + Cable Loss + Attenuator) – Pre-amplifier Gain

FCC ID: A3LSMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-07.A3L	Test Dates: 04/03/2023 - 05/12/2023	EUT Type: Portable Tablet	Page 192 of 235


7.6.1 MIMO Radiated Spurious Emission Measurements (26 Tones)

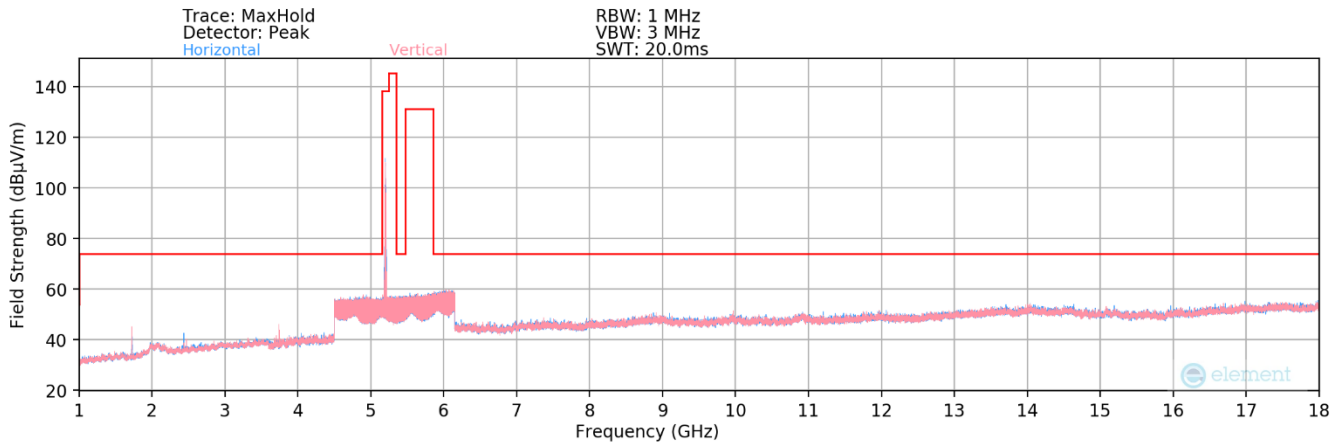

Plot 7-301. Radiated Spurious Plot above 1GHz MIMO (802.11ax – UNII 1 Ch. 40)

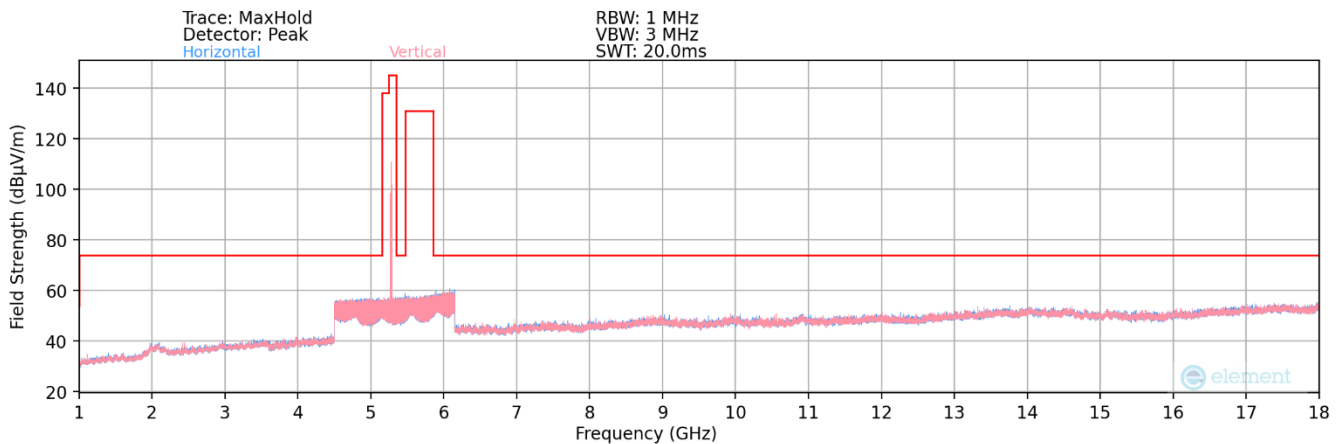


Plot 7-302. Radiated Spurious Plot above 1GHz MIMO (802.11ax – UNII 2A Ch. 56)

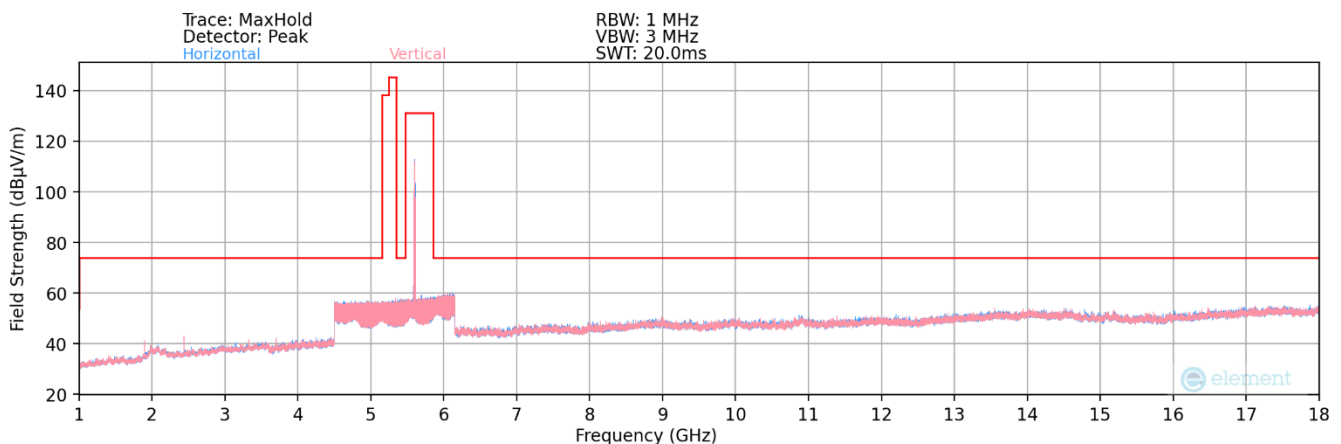


Plot 7-303. Radiated Spurious Plot above 1GHz MIMO (802.11ax – UNII 2C Ch. 120)


FCC ID: A3LSMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-07.A3L	Test Dates: 04/03/2023 - 05/12/2023	EUT Type: Portable Tablet	Page 193 of 235

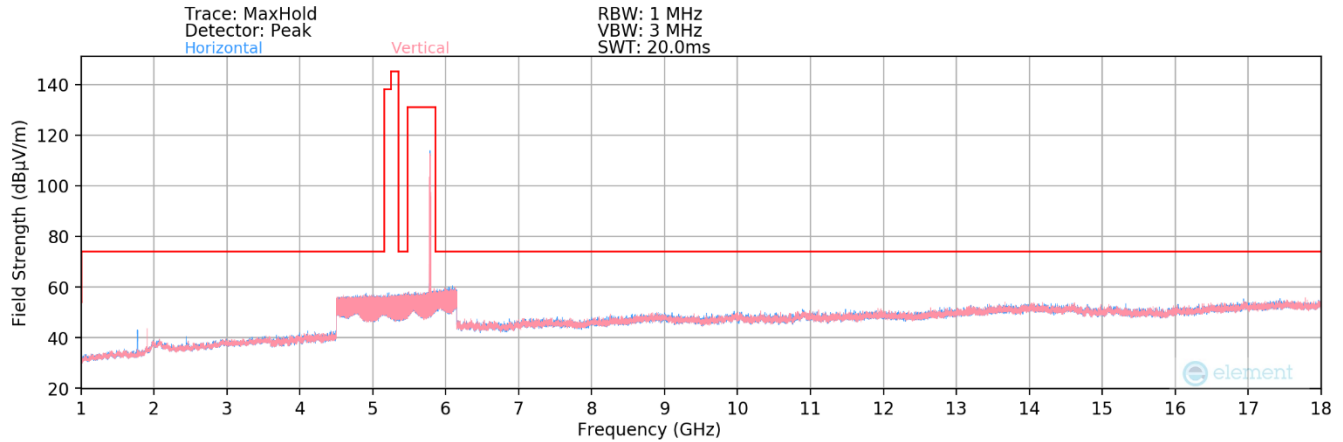

Plot 7-304. Radiated Spurious Plot above 1GHz MIMO (802.11ax – UNII 3 Ch. 157)

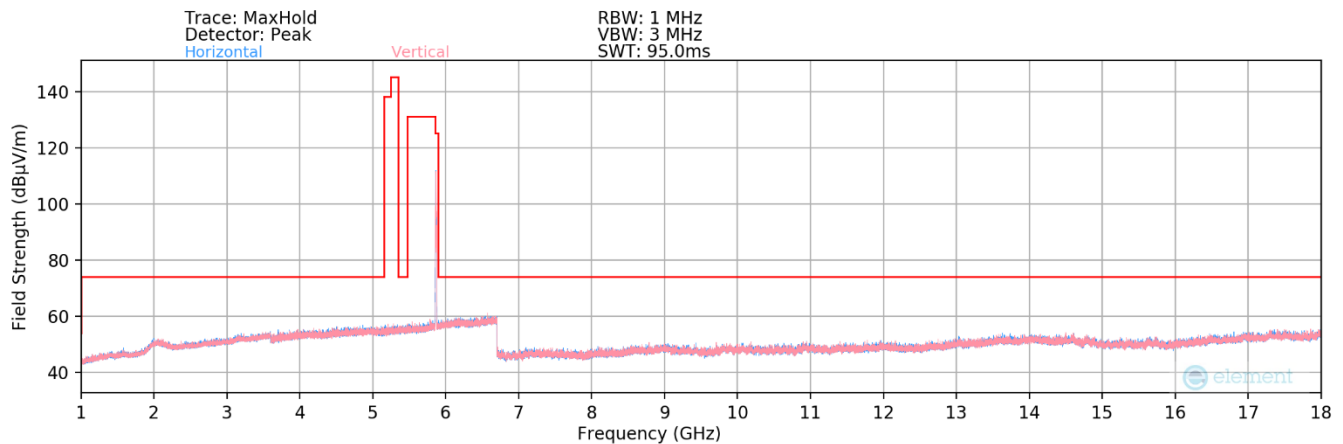


Plot 7-305. Radiated Spurious Plot above 1GHz MIMO (802.11ax – UNII 4 Ch. 173)

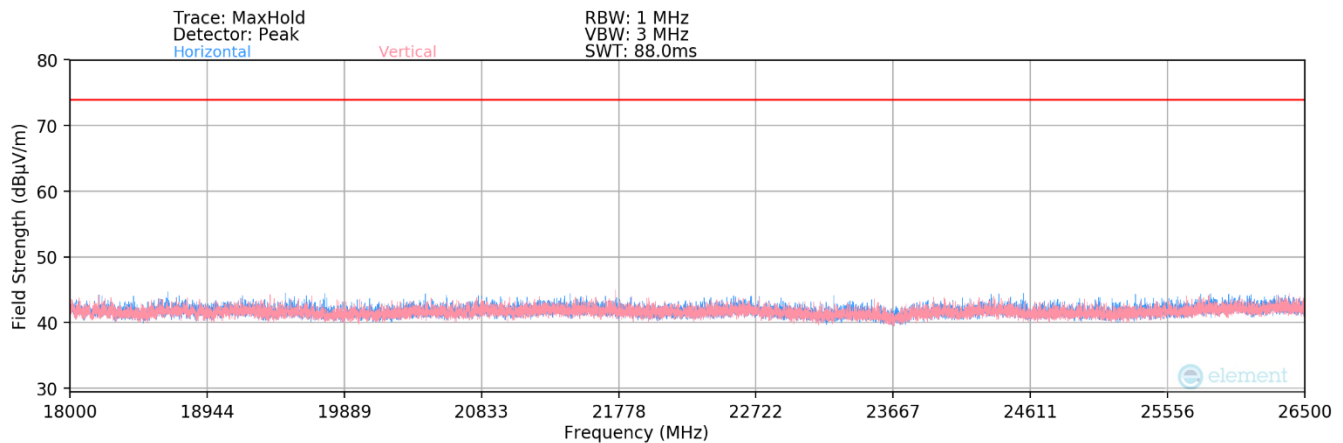

Plot 7-306. Radiated Spurious Plot 18GHz - 26.5GHz (802.11ax)

FCC ID: A3LSMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-07.A3L	Test Dates: 04/03/2023 - 05/12/2023	EUT Type: Portable Tablet	Page 194 of 235

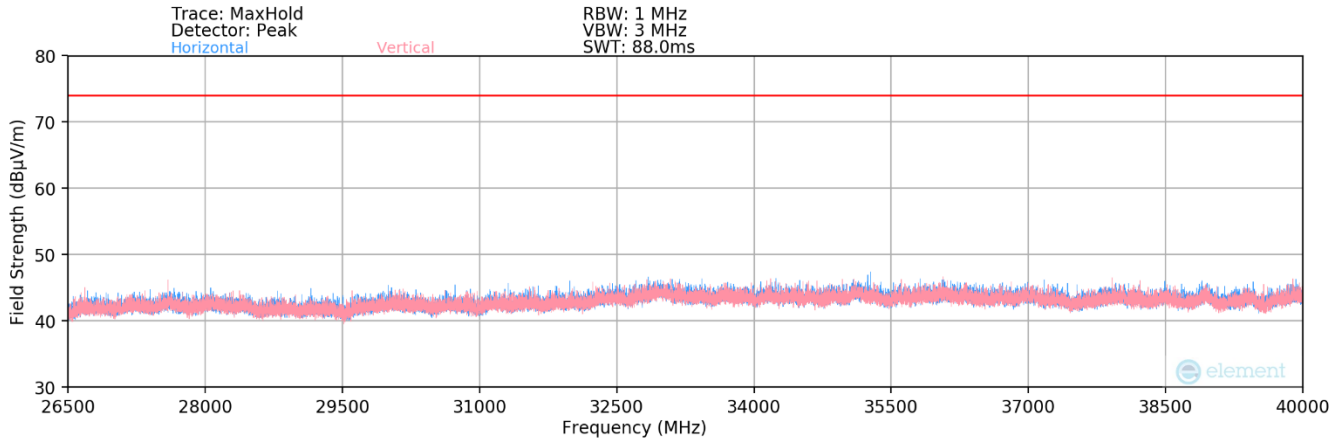

Plot 7-307. Radiated Spurious Plot 26.5GHz - 40GHz (802.11ax)

FCC ID: A3LSMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-07.A3L	Test Dates: 04/03/2023 - 05/12/2023	EUT Type: Portable Tablet	Page 195 of 235

MIMO Radiated Spurious Emission Measurements (26 Tones) – UNII 1

Worst Case Mode: 802.11ax (20MHz BW)
 Worst Case Transfer Rate: MCS0
 RU Index: 4
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5180MHz
 Channel: 36

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
10360.00	Peak	V	110	169	-64.99	11.65	0.00	53.66	68.20	-14.54
* 15540.00	Average	V	-	-	-81.91	14.50	0.00	39.59	53.98	-14.39
* 15540.00	Peak	V	-	-	-70.50	14.50	0.00	51.00	73.98	-22.98
* 20720.00	Average	V	-	-	-61.68	-3.38	-9.54	32.40	53.98	-21.58
* 20720.00	Peak	V	-	-	-50.98	-3.38	-9.54	43.10	73.98	-30.88
25900.00	Peak	V	-	-	-51.19	-2.56	-9.54	43.71	68.20	-24.49

Table 7-49. Radiated Measurements MIMO (26 Tones)

Worst Case Mode: 802.11ax (20MHz BW)
 Worst Case Transfer Rate: MCS0
 RU Index: 4
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5200MHz
 Channel: 40

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
10400.00	Peak	V	113	177	-66.38	11.68	0.00	52.30	68.20	-15.90
* 15600.00	Average	V	-	-	-82.03	14.41	0.00	39.38	53.98	-14.60
* 15600.00	Peak	V	-	-	-70.33	14.41	0.00	51.08	73.98	-22.90
* 20800.00	Average	V	150	253	-61.41	-3.33	-9.54	32.71	53.98	-21.26
* 20800.00	Peak	V	150	253	-51.06	-3.33	-9.54	43.06	73.98	-30.91
26000.00	Peak	V	-	-	-51.64	-2.36	-9.54	43.46	68.20	-24.74

Table 7-50. Radiated Measurements MIMO (26 Tones)

FCC ID: A3LSMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-07.A3L	Test Dates: 04/03/2023 - 05/12/2023	EUT Type: Portable Tablet	Page 196 of 235



Worst Case Mode: 802.11ax (20MHz BW)
 Worst Case Transfer Rate: MCS0
 RU Index: 4
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5240MHz
 Channel: 48

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
10480.00	Peak	V	120	181	-65.61	12.23	0.00	53.62	68.20	-14.58
* 15720.00	Average	V	-	-	-82.17	14.54	0.00	39.37	53.98	-14.61
* 15720.00	Peak	V	-	-	-70.30	14.54	0.00	51.24	73.98	-22.74
* 20960.00	Average	V	150	254	-60.73	-3.46	-9.54	33.26	53.98	-20.71
* 20960.00	Peak	V	150	254	-49.54	-3.46	-9.54	44.45	73.98	-29.52
26200.00	Peak	V	-	-	-51.69	-2.36	-9.54	43.40	68.20	-24.80

Table 7-51. Radiated Measurements MIMO (26 Tones)

MIMO Radiated Spurious Emission Measurements (26 Tones) – UNII 2A

Worst Case Mode: 802.11ax (20MHz BW)
 Worst Case Transfer Rate: MCS0
 RU Index: 4
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5260MHz
 Channel: 52

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
10520.00	Peak	V	113	178	-65.03	12.69	0.00	54.66	68.20	-13.54
* 15780.00	Average	V	-	-	-82.54	14.92	0.00	39.38	53.98	-14.60
* 15780.00	Peak	V	-	-	-70.78	14.92	0.00	51.14	73.98	-22.84
* 21040.00	Average	V	150	254	-60.31	-3.51	-9.54	33.64	53.98	-20.34
* 21040.00	Peak	V	150	254	-48.74	-3.51	-9.54	45.21	73.98	-28.77
26300.00	Peak	V	-	-	-51.51	-2.27	-9.54	43.68	68.20	-24.52

Table 7-52. Radiated Measurements MIMO (26 Tones)

FCC ID: A3LSMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-07.A3L	Test Dates: 04/03/2023 - 05/12/2023	EUT Type: Portable Tablet	Page 197 of 235



Worst Case Mode: 802.11ax (20MHz BW)
 Worst Case Transfer Rate: MCS0
 RU Index: 4
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5280MHz
 Channel: 56

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10560.00	Peak	V	113	175	-65.12	12.25	0.00	54.13	68.20	-14.07
* 15840.00	Average	V	-	-	-81.90	14.51	0.00	39.61	53.98	-14.37
* 15840.00	Peak	V	-	-	-70.29	14.51	0.00	51.22	73.98	-22.76
* 21120.00	Average	V	150	250	-61.07	-3.46	-9.54	32.92	53.98	-21.06
* 21120.00	Peak	V	150	250	-49.79	-3.46	-9.54	44.20	73.98	-29.78
* 26400.00	Peak	V	-	-	-51.31	-2.37	-9.54	43.78	68.20	-24.42

Table 7-53. Radiated Measurements MIMO (26 Tones)

Worst Case Mode: 802.11ax (20MHz BW)
 Worst Case Transfer Rate: MCS0
 RU Index: 4
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5320MHz
 Channel: 64

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 10640.00	Average	V	380	11	-78.47	12.01	0.00	40.54	53.98	-13.44
* 10640.00	Peak	V	380	11	-66.27	12.01	0.00	52.74	73.98	-21.24
* 15960.00	Average	V	-	-	-82.86	15.87	0.00	40.01	53.98	-13.97
* 15960.00	Peak	V	-	-	-70.31	15.87	0.00	52.56	73.98	-21.42
* 21280.00	Average	V	150	258	-60.01	-3.34	-9.54	34.11	53.98	-19.87
* 21280.00	Peak	V	150	258	-47.87	-3.34	-9.54	46.25	73.98	-27.73
* 26600.00	Peak	V	-	-	-51.22	-2.27	-9.54	43.97	68.20	-24.23

Table 7-54. Radiated Measurements MIMO (26 Tones)

FCC ID: A3LSMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-07.A3L	Test Dates: 04/03/2023 - 05/12/2023	EUT Type: Portable Tablet	Page 198 of 235

MIMO Radiated Spurious Emission Measurements (26 Tones) – UNII 2C

Worst Case Mode: 802.11ax (20MHz BW)
 Worst Case Transfer Rate: MCS0
 RU Index: 4
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5500MHz
 Channel: 100

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
* 11000.00	Average	V	206	199	-78.59	12.13	0.00	40.54	53.98	-13.44
* 11000.00	Peak	V	206	199	-66.44	12.13	0.00	52.69	73.98	-21.29
16500.00	Peak	V	-	-	-69.04	16.13	0.00	54.09	68.20	-14.11
22000.00	Peak	V	150	295	-50.67	-3.89	-9.54	42.90	68.20	-25.30
27500.00	Peak	V	-	-	-51.65	-1.17	-9.54	44.64	68.20	-23.56

Table 7-55. Radiated Measurements MIMO (26 Tones)

Worst Case Mode: 802.11ax (20MHz BW)
 Worst Case Transfer Rate: MCS0
 RU Index: 4
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5600MHz
 Channel: 120

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
* 11200.00	Average	V	322	339	-79.99	12.24	0.00	39.25	53.98	-14.73
* 11200.00	Peak	V	322	339	-68.24	12.24	0.00	51.00	73.98	-22.98
16800.00	Peak	V	-	-	-70.20	16.46	0.00	53.26	68.20	-14.94
* 22400.00	Average	V	150	304	-60.78	-3.57	-9.54	33.10	53.98	-20.88
* 22400.00	Peak	V	150	304	-50.75	-3.57	-9.54	43.13	73.98	-30.85
28000.00	Peak	V	-	-	-51.78	-0.89	-9.54	44.79	68.20	-23.41

Table 7-56. Radiated Measurements MIMO (26 Tones)

FCC ID: A3LSMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-07.A3L	Test Dates: 04/03/2023 - 05/12/2023	EUT Type: Portable Tablet	Page 199 of 235

Worst Case Mode: 802.11ax (20MHz BW)
 Worst Case Transfer Rate: MCS0
 RU Index: 4
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5720MHz
 Channel: 144

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11440.00	Average	V	264	330	-83.32	12.95	0.00	36.63	53.98	-17.35
* 11440.00	Peak	V	264	330	-69.33	12.95	0.00	50.62	73.98	-23.36
17160.00	Peak	V	-	-	-71.01	16.76	0.00	52.75	68.20	-15.45
* 22880.00	Average	V	150	312	-61.09	-3.59	-9.54	32.78	53.98	-21.20
* 22880.00	Peak	V	150	312	-48.46	-3.59	-9.54	45.41	73.98	-28.57
28600.00	Peak	V	-	-	-52.27	-1.17	-9.54	44.01	68.20	-24.19

Table 7-57. Radiated Measurements MIMO (26 Tones)

FCC ID: A3LSMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-07.A3L	Test Dates: 04/03/2023 - 05/12/2023	EUT Type: Portable Tablet	Page 200 of 235



MIMO Radiated Spurious Emission Measurements (26 Tones) – UNII 3

Worst Case Mode: 802.11ax (20MHz BW)
 Worst Case Transfer Rate: MCS0
 RU Index: 4
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5745MHz
 Channel: 149

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11490.00	Average	V	-	-	-83.25	12.89	0.00	36.64	53.98	-17.34
* 11490.00	Peak	V	-	-	-71.42	12.89	0.00	48.47	73.98	-25.51
17235.00	Peak	V	-	-	-70.41	16.94	0.00	53.53	68.20	-14.67
* 22980.00	Average	V	150	312	-61.13	-3.58	-9.54	32.75	53.98	-21.23
* 22980.00	Peak	V	150	312	-49.78	-3.58	-9.54	44.10	73.98	-29.88
28725.00	Peak	V	-	-	-53.08	-1.17	-9.54	43.21	68.20	-24.99

Table 7-58. Radiated Measurements MIMO (26 Tones)

Worst Case Mode: 802.11ax (20MHz BW)
 Worst Case Transfer Rate: MCS0
 RU Index: 4
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5785MHz
 Channel: 157

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11570.00	Average	V	-	-	-83.22	12.68	0.00	36.46	53.98	-17.52
* 11570.00	Peak	V	-	-	-71.04	12.68	0.00	48.64	73.98	-25.34
17355.00	Peak	V	-	-	-70.44	17.64	0.00	54.20	68.20	-14.00
23140.00	Peak	V	150	310	-51.10	-3.58	-9.54	42.78	68.20	-25.42
28925.00	Peak	V	-	-	-53.21	-1.09	-9.54	43.15	68.20	-25.05

Table 7-59. Radiated Measurements MIMO (26 Tones)

FCC ID: A3LSMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-07.A3L	Test Dates: 04/03/2023 - 05/12/2023	EUT Type: Portable Tablet	Page 201 of 235



Worst Case Mode: 802.11ax (20MHz BW)
 Worst Case Transfer Rate: MCS0
 RU Index: 4
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5825MHz
 Channel: 165

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11650.00	Average	V	-	-	-82.22	13.21	0.00	37.99	53.98	-15.99
* 11650.00	Peak	V	-	-	-70.45	13.21	0.00	49.76	73.98	-24.22
17475.00	Peak	V	-	-	-70.69	17.12	0.00	53.43	68.20	-14.77
23300.00	Peak	V	-	-	-50.99	-3.59	-9.54	42.87	68.20	-25.33
29125.00	Peak	V	-	-	-52.74	-0.90	-9.54	43.82	68.20	-24.38

Table 7-60. Radiated Measurements MIMO (26 Tones)

FCC ID: A3LSMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-07.A3L	Test Dates: 04/03/2023 - 05/12/2023	EUT Type: Portable Tablet	Page 202 of 235



MIMO Radiated Spurious Emission Measurements (26 Tones) – UNII 4

Worst Case Mode: 802.11ax (20MHz BW)
 Worst Case Transfer Rate: MCS0
 RU Index: 4
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5845MHz
 Channel: 169

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
* 11690.00	Average	V	-	-	-81.49	13.23	0.00	38.74	53.98	-15.24
* 11690.00	Peak	V	-	-	-70.40	13.23	0.00	49.83	73.98	-24.15
17535.00	Peak	V	-	-	-70.52	17.25	0.00	53.73	68.20	-14.47
23380.00	Peak	V	150	98	-49.68	-3.60	-9.54	53.72	68.20	-14.48
29225.00	Peak	V	-	-	-53.28	-0.85	-9.54	52.87	68.20	-15.33
35070.00	Peak	V	-	-	-50.83	-0.28	-9.54	55.89	68.20	-12.31

Table 7-61. Radiated Measurements MIMO (26 Tones)

Worst Case Mode: 802.11ax (20MHz BW)
 Worst Case Transfer Rate: MCS0
 RU Index: 4
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5865MHz
 Channel: 173

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
* 11730.00	Average	V	-	-	-82.01	13.85	0.00	38.84	53.98	-15.14
* 11730.00	Peak	V	-	-	-70.29	13.85	0.00	50.56	73.98	-23.42
17595.00	Peak	V	-	-	-71.22	17.42	0.00	53.20	68.20	-15.00
23460.00	Peak	V	-	-	-50.02	-3.67	-9.54	53.31	68.20	-14.89
29325.00	Peak	V	-	-	-53.70	-0.75	-9.54	52.55	68.20	-15.65
35190.00	Peak	V	-	-	-51.03	-0.26	-9.54	55.71	68.20	-12.49

Table 7-62. Radiated Measurements MIMO (26 Tones)

FCC ID: A3LSMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-07.A3L	Test Dates: 04/03/2023 - 05/12/2023	EUT Type: Portable Tablet	Page 203 of 235



Worst Case Mode: 802.11ax (20MHz BW)
 Worst Case Transfer Rate: MCS0
 RU Index: 4
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5885MHz
 Channel: 177

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11770.00	Average	V	-	-	-81.59	13.84	0.00	39.25	53.98	-14.73
* 11770.00	Peak	V	-	-	-70.33	13.84	0.00	50.51	73.98	-23.47
17655.00	Peak	V	-	-	-70.69	17.06	0.00	53.37	68.20	-14.83
23540.00	Peak	V	-	-	-50.11	-3.66	-9.54	53.23	68.20	-14.97
29425.00	Peak	V	-	-	-53.34	-0.72	-9.54	52.94	68.20	-15.26
35310.00	Peak	V	-	-	-51.54	-0.27	-9.54	55.19	68.20	-13.01

Table 7-63. Radiated Measurements MIMO (26 Tones)

FCC ID: A3LSMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-07.A3L	Test Dates: 04/03/2023 - 05/12/2023	EUT Type: Portable Tablet	Page 204 of 235



Worst Case Mode: 802.11ax (20MHz BW)
 Worst Case Transfer Rate: MCS0
 RU Index: 4
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5320MHz
 Channel: 64

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
* 10640.00	Average	V	384	8	-78.87	12.01	0.00	40.14	53.98	-13.84
* 10640.00	Peak	V	384	8	-67.42	12.01	0.00	51.59	73.98	-22.39
* 15960.00	Average	V	-	-	-82.90	15.87	0.00	39.97	53.98	-14.01
* 15960.00	Peak	V	-	-	-71.29	15.87	0.00	51.58	73.98	-22.40
* 21280.00	Average	V	-	-	-66.47	3.95	-9.54	34.94	53.98	-19.04
* 21280.00	Peak	V	-	-	-55.97	3.95	-9.54	45.44	73.98	-28.54
26600.00	Peak	V	-	-	-56.66	4.51	-9.54	45.30	68.20	-22.90

Table 7-64. Radiated Measurements MIMO (26 Tones) – With Keyboard Open

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
* 10640.00	Average	V	129	176	-78.77	12.01	0.00	40.24	53.98	-13.74
* 10640.00	Peak	V	129	176	-66.99	12.01	0.00	52.02	73.98	-21.96
* 15960.00	Average	V	-	-	-82.85	15.87	0.00	40.02	53.98	-13.96
* 15960.00	Peak	V	-	-	-71.22	15.87	0.00	51.65	73.98	-22.33
* 21280.00	Average	V	-	-	-55.34	3.95	-9.54	46.07	53.98	-7.91
* 21280.00	Peak	V	-	-	-66.63	3.95	-9.54	34.78	73.98	-39.20
26600.00	Peak	V	-	-	-56.70	4.51	-9.54	45.27	68.20	-22.93

Table 7-65. Radiated Measurements MIMO (26 Tones) – With Keyboard Closed

FCC ID: A3LSMX910	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2303200036-07.A3L	Test Dates: 04/03/2023 - 05/12/2023	EUT Type: Portable Tablet	Page 205 of 235