



ELEMENT WASHINGTON DC LLC

7185 Oakland Mills Road, Columbia, MD 21046 USA
Tel. 410.290.6652 / Fax 410.290.6654
<http://www.element.com>

MEASUREMENT REPORT FCC Part 15C Wireless Power Transfer

Applicant Name:
Samsung Electronics Co., Ltd.
129, Samsung-ro,
Yeongtong-gu, Suwon-si
Gyeonggi-do, 16677, Korea

Date of Testing:
05/09 - 05/12/2023
Test Report Issue Date:
05/20/2023
Test Site/Location:
ELEMENT Lab. Columbia, MD, USA
Test Report Serial No.:
1M2303200036-11.A3L

FCC ID:	A3LSMX910
APPLICANT:	Samsung Electronics Co., Ltd.

Application Type: Certification
Model: SM-X910
EUT Type: Portable Tablet
Frequency Range: 0.53 – 0.66MHz
FCC Classification: Part 15 Low Power Transmitter Below 1705kHz (DCD)
FCC Rule Part(s): Part 15 Subpart C
Test Procedure(s): ANSI C63.10-2013

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

RJ Ortanez
Executive Vice President



FCC ID: A3LSMX910	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2303200036-11.A3L	Test Dates: 05/09 - 05/12/2023	EUT Type: Portable Tablet	Page 1 of 37

T A B L E O F C O N T E N T S

1.0	Introduction	3
1.1	Scope.....	3
1.2	Element Test Location	3
1.3	Test Facility / Accreditations	3
2.0	PRODUCT INFORMATION	4
2.1	Equipment Description.....	4
2.2	Device Capabilities	4
2.3	Test Configuration	4
2.4	EMI Suppression Device(s)/Modifications.....	4
2.5	Software and Firmware.....	4
3.0	DESCRIPTION OF TEST	5
3.1	Evaluation Procedure.....	5
3.2	AC Line Conducted Emissions	5
3.3	Radiated Emissions	6
3.4	Environmental Conditions	6
4.0	ANTENNA REQUIREMENTS.....	7
5.0	MEASUREMENT UNCERTAINTY	8
6.0	TEST EQUIPMENT CALIBRATION DATA.....	9
7.0	TEST DATA	10
7.1	Summary	10
7.2	Occupied Bandwidth Measurement	11
7.3	Radiated Spurious Emission Measurements, Out-of-Band.....	15
7.4	Line Conducted Measurement Data	29
8.0	CONCLUSION	37

FCC ID: A3LSMX910	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2303200036-11.A3L	Test Dates: 05/09 - 05/12/2023	EUT Type: Portable Tablet	Page 2 of 37

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2 Element Test Location

These measurement tests were conducted at the Element laboratory facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

1.3 Test Facility / Accreditations

Measurements were performed at Element Engineering lab located in Columbia, MD 21046, U.S.A.

- Element Washington DC LLC is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- Element Washington DC LLC TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- Element Washington DC LLC facility is a registered (2451B) test laboratory with the site description on file with ISED.
- Element Washington DC LLC is a Recognized U.S. Certification Assessment Body (CAB # US0110) for ISED Canada as designated by NIST under the U.S. and Canada Mutual Recognition Agreements (MRAs).

FCC ID: A3LSMX910	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2303200036-11.A3L	Test Dates: 05/09 - 05/12/2023	EUT Type: Portable Tablet	Page 3 of 37

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Samsung Portable Tablet FCC ID: A3LSMX910**. The test data contained in this report pertains only to the emissions generated by the IC of the EUT that receive or transmit AC power signal through magnetic induction (MI) or magnetic resonance (MR) wirelessly.

Test Device Serial No.: 0154M, 0155M

2.2 Device Capabilities

This device contains the following capabilities:

802.11b/g/n/ax WLAN, 802.11a/n/ac/ax UNII (5 and 6 GHz), Bluetooth (1x, EDR, LE), Wireless Power Transfer

2.3 Test Configuration

The EUT is used with a stylus device (S-PEN). The EUT operates with the S-PEN in three different inductive coupling modes of S-PEN motion detection (Hover, Click, and Eraser) and has two charging positions (SPen Detection 1 and 2). And, it also used with keyboard cover, which detected whether it is open or closed. The EUT was set to continuously transmit to the SPEN in each of the three modes & keyboard cover. Data is additionally included for this condition.

The EUT was tested in accordance with the guidance of ANSI C63.10-2013. See Sections 3.2 and 3.3 of this test report for a description of the AC line conducted and radiated emissions test setups, respectively.

2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

2.5 Software and Firmware

The test was conducted with firmware version X910XXU0AWD5 installed on the EUT.

FCC ID: A3LSMX910	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2303200036-11.A3L	Test Dates: 05/09 - 05/12/2023	EUT Type: Portable Tablet	Page 4 of 37

3.0 DESCRIPTION OF TEST

3.1 Evaluation Procedure

The measurement procedure described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2013) was used in the measurement of the EUT.

Deviation from measurement procedure.....None

3.2 AC Line Conducted Emissions

The line-conducted facility is located inside a 10'x16'x9' shielded enclosure. The shielded enclosure is manufactured by ETS Lindgren RF Enclosures. The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-5. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50μH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. The external power line filter is an ETS Lindgren Model LPRX-4X30 (100dB Attenuation, 14kHz-18GHz) and the two EMI/RFI filters are ETS Lindgren Model LRW-2030-S1 (100dB Minimum Insertion Loss, 14kHz – 10GHz). These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference groundplane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The spectrum was scanned from 150kHz to 30MHz with a spectrum analyzer. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions is used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

Line conducted emissions test results are shown in Section 7.3. Automated test software was used to perform the AC line conducted emissions testing.

FCC ID: A3LSMX910	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2303200036-11.A3L	Test Dates: 05/09 - 05/12/2023	EUT Type: Portable Tablet	Page 5 of 37

3.3 Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. An 80cm tall test table made of Styrodur is placed on top of the turn table. For measurements above 1GHz, an additional Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33 depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

3.4 Environmental Conditions

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

FCC ID: A3LSMX910	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2303200036-11.A3L	Test Dates: 05/09 - 05/12/2023	EUT Type: Portable Tablet	Page 6 of 37

4.0 ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antenna of the EUT are **permanently attached**.
- This unit was tested with its standard battery.

Conclusion:

The EUT complies with the requirement of §15.203.

FCC ID: A3LSMX910	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2303200036-11.A3L	Test Dates: 05/09 - 05/12/2023	EUT Type: Portable Tablet	Page 7 of 37

5.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty (\pm dB)
Line Conducted Disturbance	3.09
Radiated Disturbance (<1GHz)	4.98

FCC ID: A3LSMX910	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2303200036-11.A3L	Test Dates: 05/09 - 05/12/2023	EUT Type: Portable Tablet	Page 8 of 37



6.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	AP2-001	EMC Cable and Switch System	1/11/2023	Annual	1/11/2024	AP2-001
-	AP2-002	EMC Cable and Switch System	1/11/2023	Annual	1/11/2024	AP2-002
-	WL25-1	Conducted Cable Set (25GHz)	1/12/2023	Annual	1/12/2024	WL25-1
N/A	NMLC-2	Line Conducted Emissions Cable (NM)	1/11/2023	Annual	1/11/2024	NMLC-2
Com-Power	AL-130R	9kHz - 30MHz Loop Antenna	1/19/2022	Biennial	1/19/2024	121085
Keysight Technologies	N9030A	3Hz-44GHz PXA Signal Analyzer	8/18/2022	Annual	8/18/2023	MY54500644
Keysight Technologies	N9030A	PXA Signal Analyzer	9/6/2022	Annual	9/6/2023	MY55410501
Keysight Technologies	N9038A	MXE EMI Receiver	1/21/2022	Annual	6/21/2023	MY51210133
Rohde & Schwarz	HFH2-Z2E	9kHz - 30MHz Loop Antenna	2/17/2022	Biennial	2/17/2024	102326
Rohde & Schwarz	ESW26	ESW26 EMI Test Receiver	5/19/2022	Annual	5/19/2023	161675
Solar Electronics	8012-50-R-24-BNC	Line Impedance Stabilization Network	9/21/2021	Annual	9/21/2023	310233

Table 6-1. Annual Test Equipment Calibration Schedule

FCC ID: A3LSMX910	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2303200036-11.A3L	Test Dates: 05/09 - 05/12/2023	EUT Type: Portable Tablet	Page 9 of 37

7.0 TEST DATA

7.1 Summary

Company Name: Samsung Electronics Co., Ltd.
 FCC ID: A3LSMX910
 FCC Classification: Part 15 Low Power Transmitter Below 1705kHz (DCD)
 Frequency Range: 0.53 – 0.66MHz

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.209	Out-of-Band Emissions	Emissions must meet the radiated limits detailed in 15.209	Radiated	PASS	Section 7.2
15.207	AC Conducted Emissions 150kHz – 30MHz	< FCC 15.207 limits	LINE CONDUCTED	PASS	Section 7.3

Table 7-1. Summary of Test Results

FCC ID: A3LSMX910	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2303200036-11.A3L	Test Dates: 05/09 - 05/12/2023	EUT Type: Portable Tablet	Page 10 of 37

7.2 Occupied Bandwidth Measurement

Test Overview and Limit

The occupied bandwidth is measured with a spectrum analyzer connected to the receive antenna while the EUT is operating in transmission mode at the appropriate frequency.


Test Settings

1. Spectrum analyzer frequency is set to the nominal EUT channel center frequency.
2. RBW = 1 – 5% OBW
3. VBW \geq 3 x RBW
4. Reference level set to keep signal from exceeding maximum input mixer level for linear operation.
5. Detector = Peak
6. Trace mode = max hold
7. Sweep = auto couple
8. The trace was allowed to stabilize
9. Using the 99% power bandwidth function of the instrument and report the measured bandwidth.


Mode	Frequency	Occupied Bandwidth
SPEN Detection 1	531.25kHz	248 Hz
SPEN Detection 2	531.25kHz	236 Hz
Hover	562.5kHz	53 Hz
Click	531.25kHz	64 Hz
Eraser	593.7kHz	57 Hz
Keyboard Cover Detect	656.25kHz	62 Hz

Table 7-2. Occupied Bandwidth Measurement

FCC ID: A3LSMX910	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2303200036-11.A3L	Test Dates: 05/09 - 05/12/2023	EUT Type: Portable Tablet	Page 11 of 37

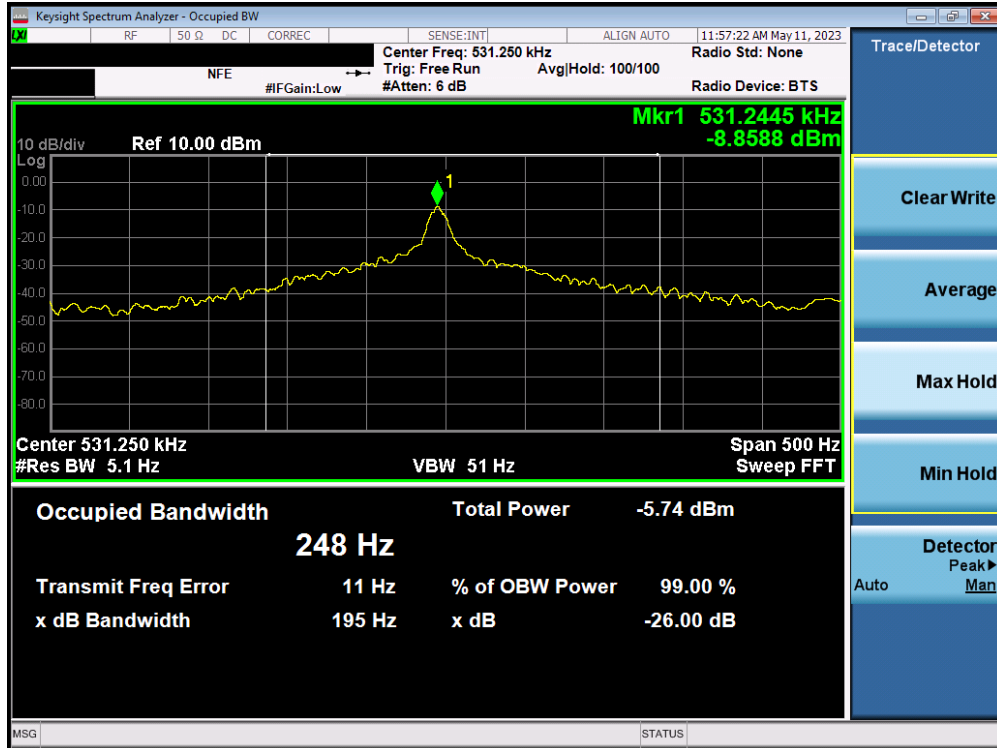


Plot 7-1. Occupied Bandwidth Measurement _ SPEN Detection 1

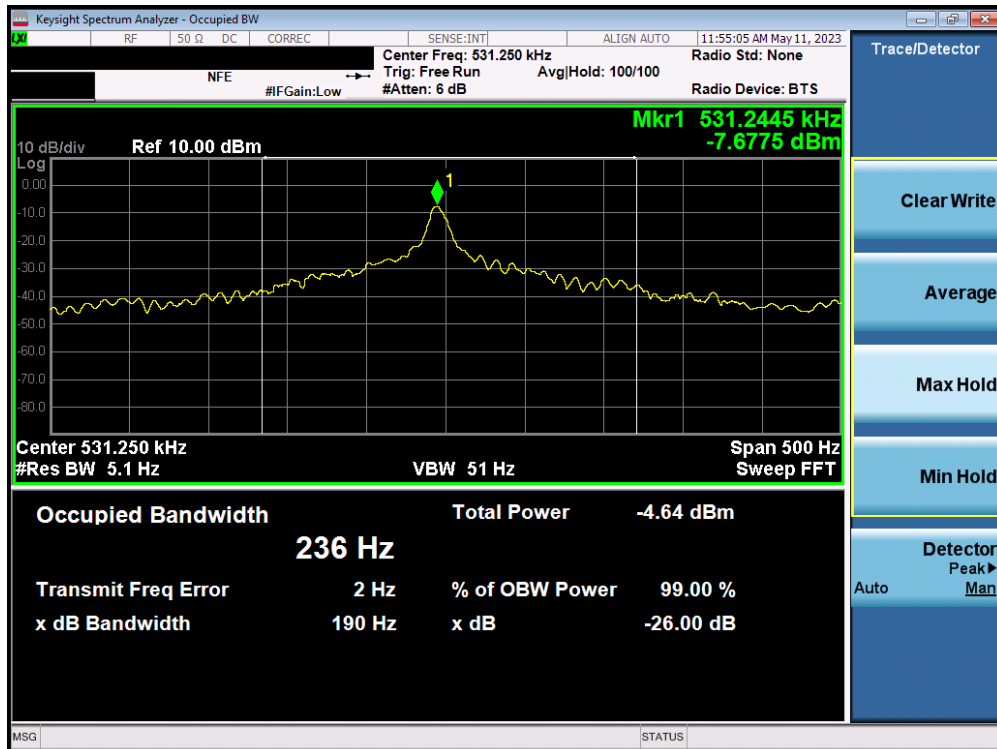


Plot 7-2. Occupied Bandwidth Measurement _ SPEN Detection 2

FCC ID: A3LSMX910	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2303200036-11.A3L	Test Dates: 05/09 - 05/12/2023	EUT Type: Portable Tablet	Page 12 of 37

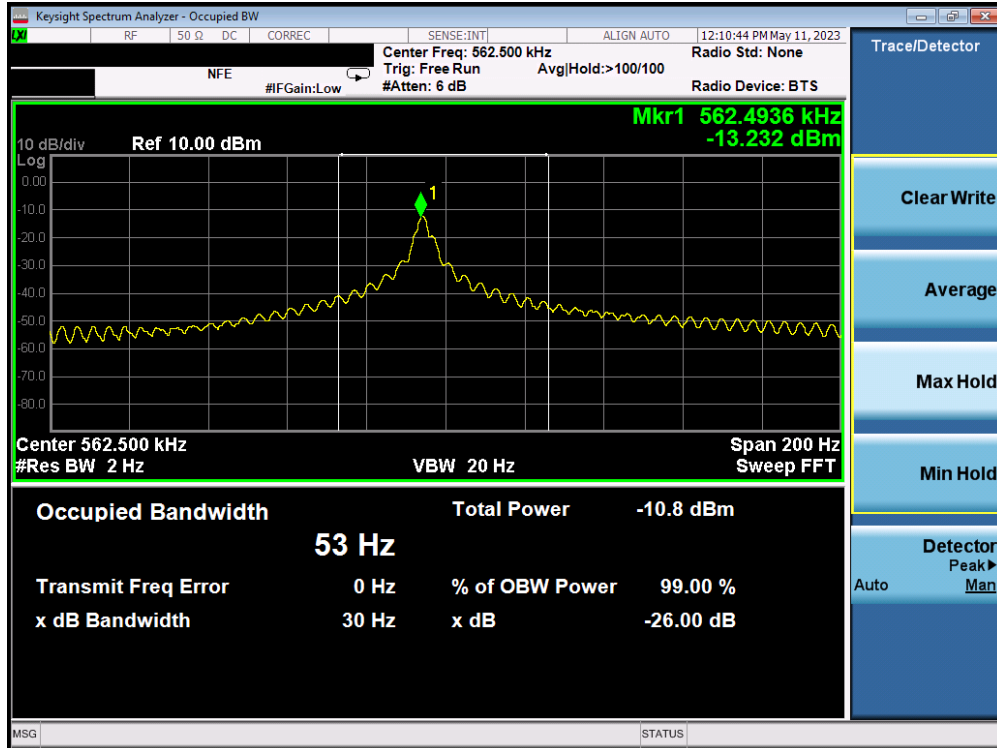

Plot 7-3. Occupied Bandwidth Measurement _ Hover

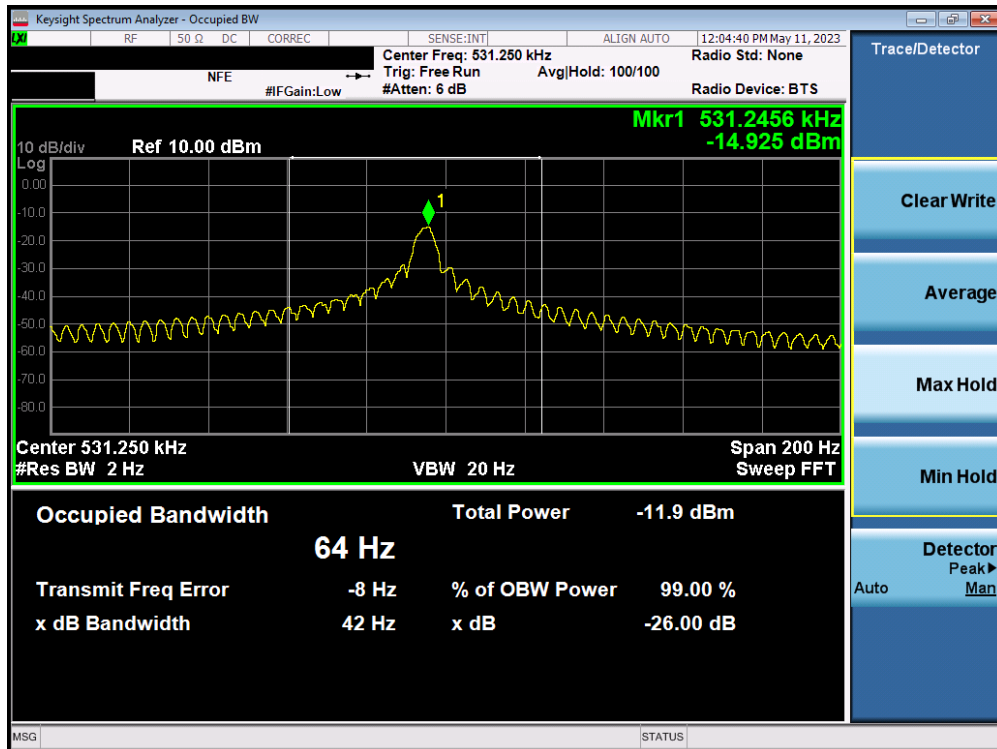


Plot 7-4. Occupied Bandwidth Measurement _ Click

FCC ID: A3LSMX910	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2303200036-11.A3L	Test Dates: 05/09 - 05/12/2023	EUT Type: Portable Tablet	Page 13 of 37



Plot 7-5. Occupied Bandwidth Measurement _ Eraser

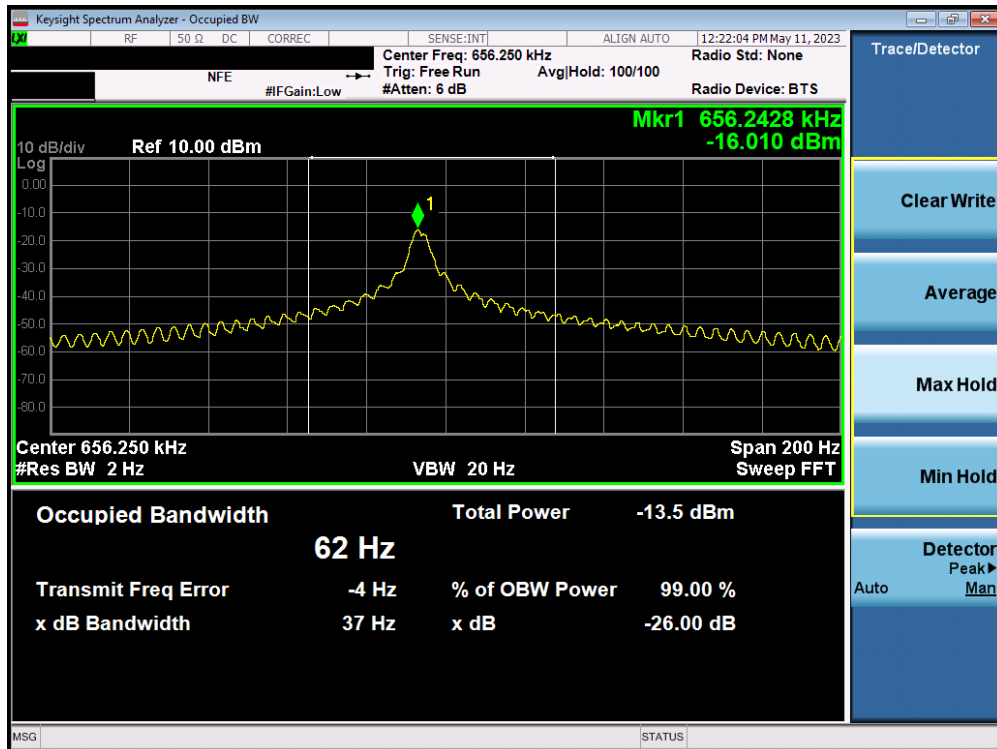

Plot 7-6. Occupied Bandwidth Measurement _ Keyboard Cover Detect

FCC ID: A3LSMX910	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2303200036-11.A3L	Test Dates: 05/09 - 05/12/2023	EUT Type: Portable Tablet	Page 14 of 37



7.3 Radiated Spurious Emission Measurements, Out-of-Band §15.209

Test Overview and Limit

The EUT was tested from 9kHz up to the 30MHz. All measurements up to 30MHz were recorded with a spectrum analyzer employing a quasi-peak detector.

All out-of-band emissions must not exceed the limits shown in Table 7-3 per Section 15.209.

Frequency	Field Strength [μ V/m]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-3. Radiated Limits – Out of band

Test Procedures Used

ANSI C63.10-2013 – Section 6.5.4

Test Settings

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 9kHz for emissions below 30MHz
3. VBW \geq 3 x RBW
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

FCC ID: A3LSMX910	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2303200036-11.A3L	Test Dates: 05/09 - 05/12/2023	EUT Type: Portable Tablet	Page 15 of 37

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

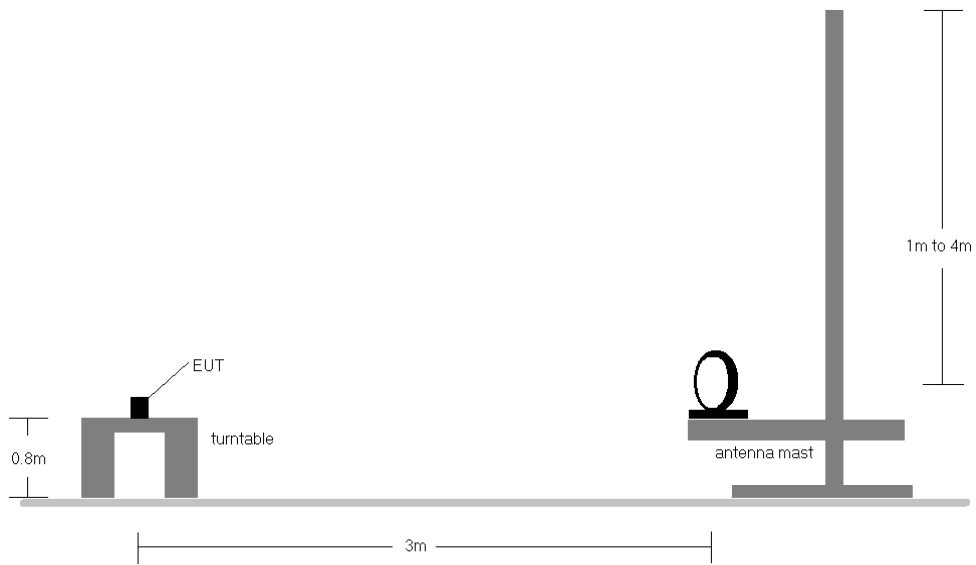


Figure 7-1. Radiated Test Setup

Test Notes:


1. All measurements were recorded using a spectrum analyzer employing a quasi-peak detector for emissions below 30MHz.
2. A loop antenna was used to investigate emissions below 30MHz.
3. Below 30MHz the loop antenna was positioned in 3 orthogonal planes (X front, Y side, Z top) to determine the orientation resulting in the worst case emissions.
4. The EUT was positioned in three orthogonal planes to determine the orientation resulting in the worst case emissions.
5. The spectrum is investigated from 9kHz up to 30MHz per §15.33. The worst-case emissions are reported.
6. No spurious emissions levels were found to be greater than the level of the fundamental.
7. The "-" shown in the following RSE tables are used to denote a noise floor measurement.
8. A distance correction factor is applied per the provisions of 15.31(f)(2) to compensate for measurements performed at 3m in order to compare directly with the limits specified in 15.209.

Sample Calculation


- Field Strength Level $_{[dB\mu V/m]} = \text{Analyzer Level }_{[dBm]} + 107 + \text{AFCL }_{[dB/m]}$
- $\text{AFCL }_{[dB/m]} = \text{Antenna Factor }_{[dB/m]} + \text{Cable Loss }_{[dB]}$
- $\text{Margin }_{[dB]} = \text{Field Strength Level }_{[dB\mu V/m]} - \text{Limit }_{[dB\mu V/m]}$

FCC ID: A3LSMX910	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2303200036-11.A3L	Test Dates: 05/09 - 05/12/2023	EUT Type: Portable Tablet	Page 16 of 37


Radiated Spurious Emission Measurements, Out-of-Band, Wireless Power Transfer §15.209

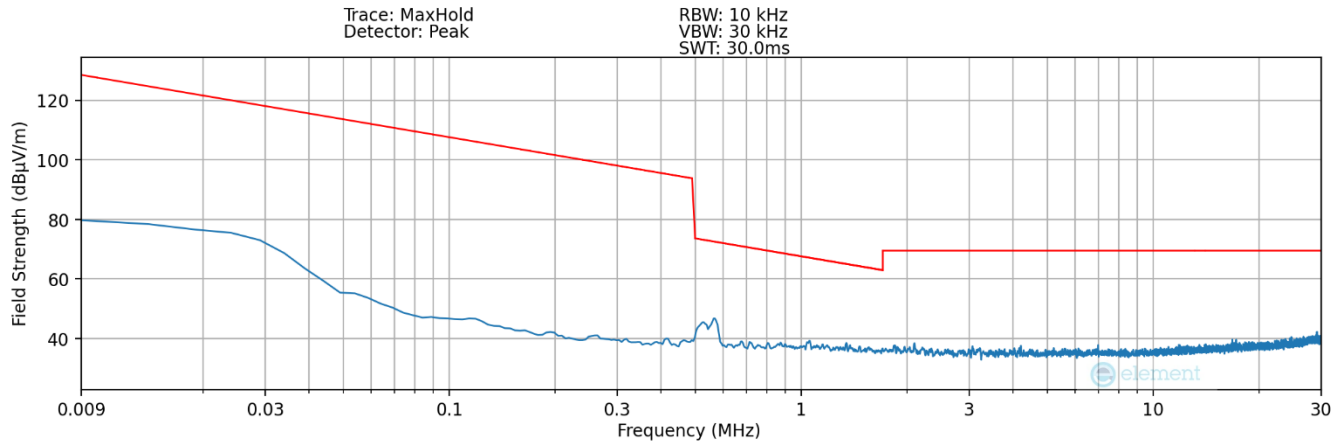

Plot 7-7. Radiated Spurious Plot 9kHz – 30MHz (Pol. X – Device to Pen WPT) _ SPEN Detection 1

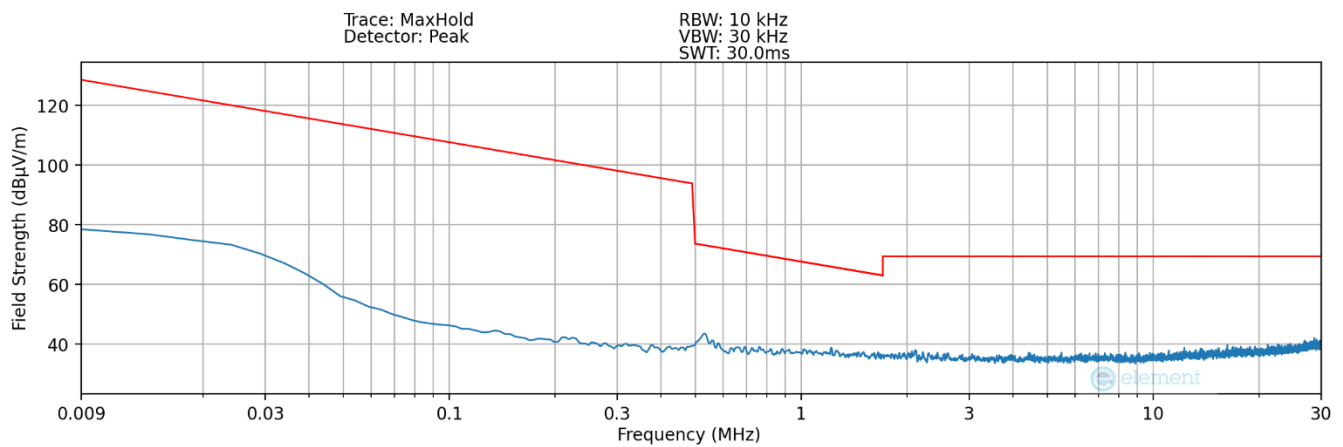

Plot 7-8 Radiated Spurious Plot 9kHz – 30MHz (Pol. Y – Device to Pen WPT) _ SPEN Detection 1

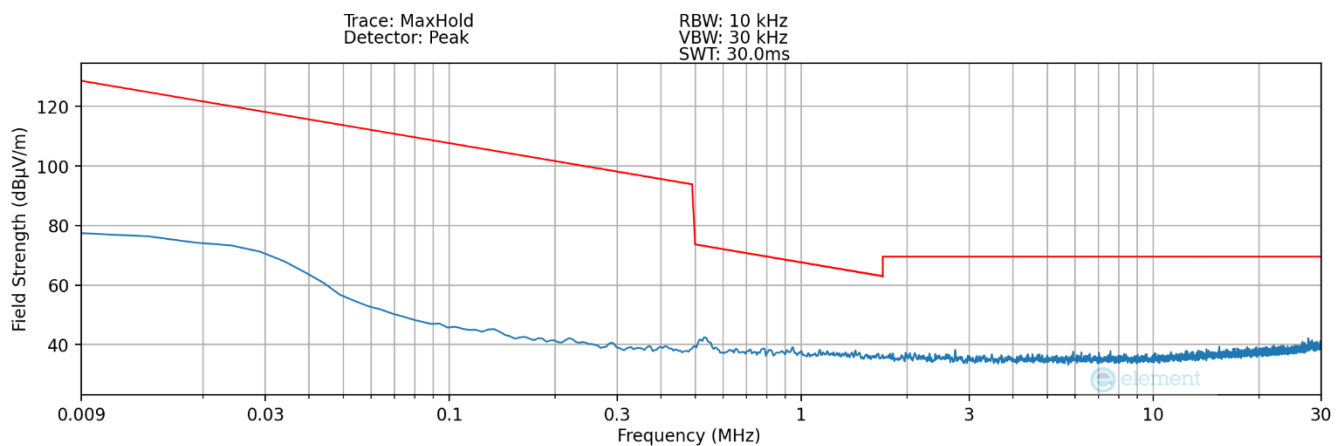

Plot 7-9. Radiated Spurious Plot 9kHz – 30MHz (Pol. Z – Device to Pen WPT) _ SPEN Detection 1

FCC ID: A3LSMX910	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2303200036-11.A3L	Test Dates: 05/09 - 05/12/2023	EUT Type: Portable Tablet	Page 17 of 37



Radiated Spurious Emission Measurements, Out-of-Band §15.209:

Tx Frequency 531.25kHz

Measurement Distance: 3 Meters

Frequency [MHz]	Detector	Ant. Pol. [X/Y/Z]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	3m Field Strength [dBµV/m]	Distance Correction Factor	Corrected Field Strength [dBµV/m]	Limit [µV/m]	Limit [dBµV/m]	Margin [dB]
0.531	Quasi-Peak	X	100	307	-78.41	20.12	48.71	-40.00	8.71	45.18	33.10	-24.39
1.063	Quasi-Peak	X	-	-	-87.62	20.49	39.87	-40.00	-0.13	22.59	27.08	-27.20
1.594	Quasi-Peak	X	-	-	-88.28	20.53	39.25	-40.00	-0.75	15.06	23.56	-24.30
2.125	Quasi-Peak	X	-	-	-89.10	20.79	38.69	-40.00	-1.31	30.00	29.54	-30.85
2.656	Quasi-Peak	X	-	-	-89.17	20.35	38.18	-40.00	-1.82	30.00	29.54	-31.36
3.188	Quasi-Peak	X	-	-	-89.45	20.81	38.36	-40.00	-1.64	30.00	29.54	-31.18


Table 7-4. Radiated Measurements (Device to Pen WPT) _ SPEN Detection 1

FCC ID: A3LSMX910	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2303200036-11.A3L	Test Dates: 05/09 - 05/12/2023	EUT Type: Portable Tablet	Page 18 of 37




Radiated Spurious Emission Measurements, Out-of-Band, Wireless Power Transfer


§15.209

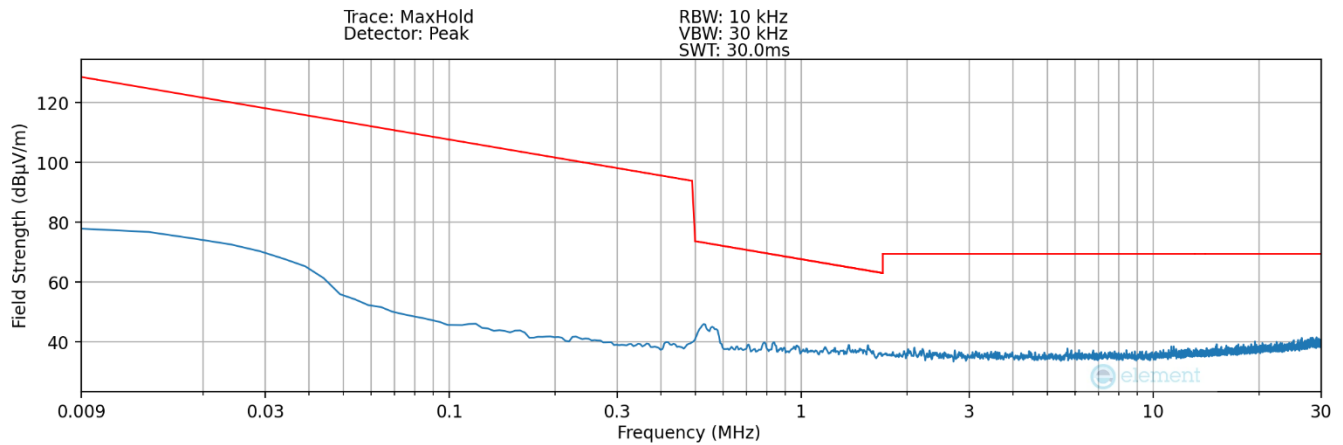

Plot 7-10. Radiated Spurious Plot 9kHz – 30MHz (Pol. X – Device to Pen WPT) _ SPEN Detection 2

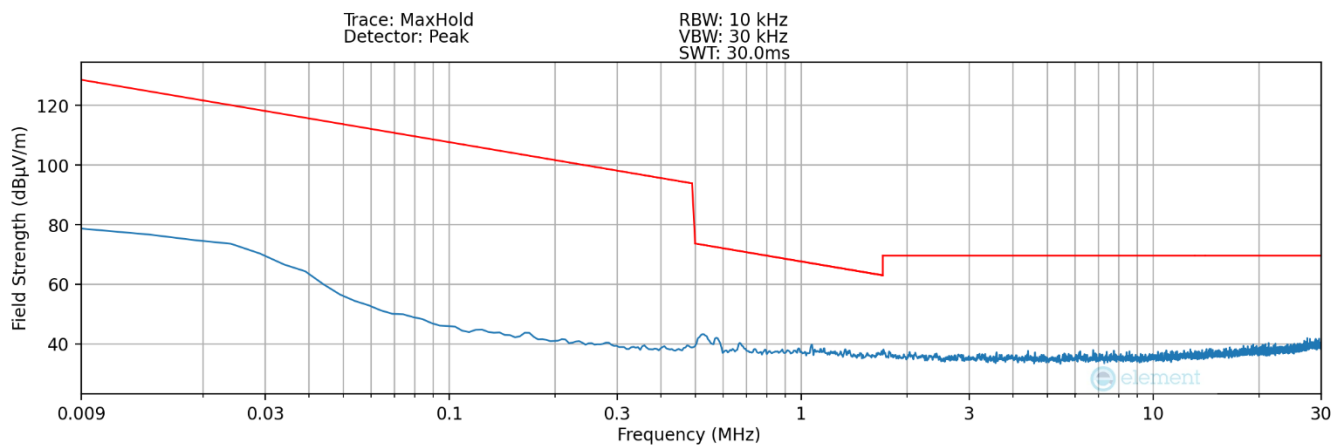

Plot 7-11 Radiated Spurious Plot 9kHz – 30MHz (Pol. Y – Device to Pen WPT) _ SPEN Detection 2

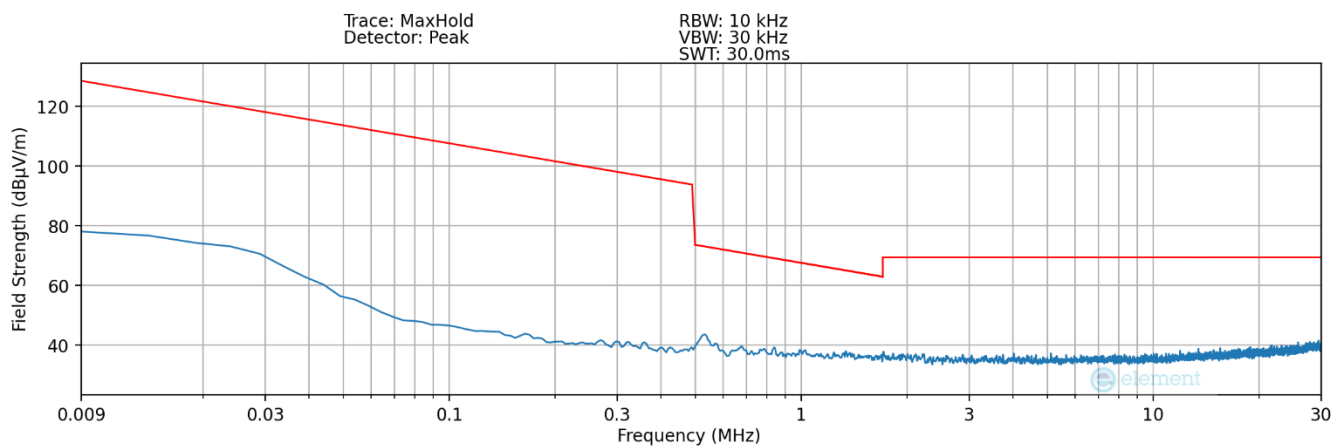

Plot 7-12. Radiated Spurious Plot 9kHz – 30MHz (Pol. Z – Device to Pen WPT) _ SPEN Detection 2

FCC ID: A3LSMX910	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2303200036-11.A3L	Test Dates: 05/09 - 05/12/2023	EUT Type: Portable Tablet	Page 19 of 37



Radiated Spurious Emission Measurements, Out-of-Band §15.209:

Tx Frequency 531.25kHz

Measurement Distance: 3 Meters


Frequency [MHz]	Detector	Ant. Pol. [X/Y/Z]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	3m Field Strength [dBµV/m]	Distance Correction Factor	Corrected Field Strength [dBµV/m]	Limit [µV/m]	Limit [dBµV/m]	Margin [dB]
0.531	Quasi-Peak	X	100	319	-76.65	20.12	50.47	-40.00	10.47	45.18	33.10	-22.63
1.063	Quasi-Peak	X	-	-	-87.46	20.49	40.03	-40.00	0.03	22.59	27.08	-27.04
1.594	Quasi-Peak	X	-	-	-87.97	20.53	39.56	-40.00	-0.44	15.06	23.56	-23.99
2.125	Quasi-Peak	X	-	-	-89.46	20.79	38.33	-40.00	-1.67	30.00	29.54	-31.21
2.656	Quasi-Peak	X	-	-	-89.42	20.35	37.93	-40.00	-2.07	30.00	29.54	-31.61
3.188	Quasi-Peak	X	-	-	-89.07	20.81	38.74	-40.00	-1.26	30.00	29.54	-30.80

Table 7-5. Radiated Measurements (Device to Pen WPT) _ SPEN Detection 2


FCC ID: A3LSMX910	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2303200036-11.A3L	Test Dates: 05/09 - 05/12/2023	EUT Type: Portable Tablet	Page 20 of 37

Radiated Spurious Emission Measurements, Out-of-Band, Digitizer


§15.209

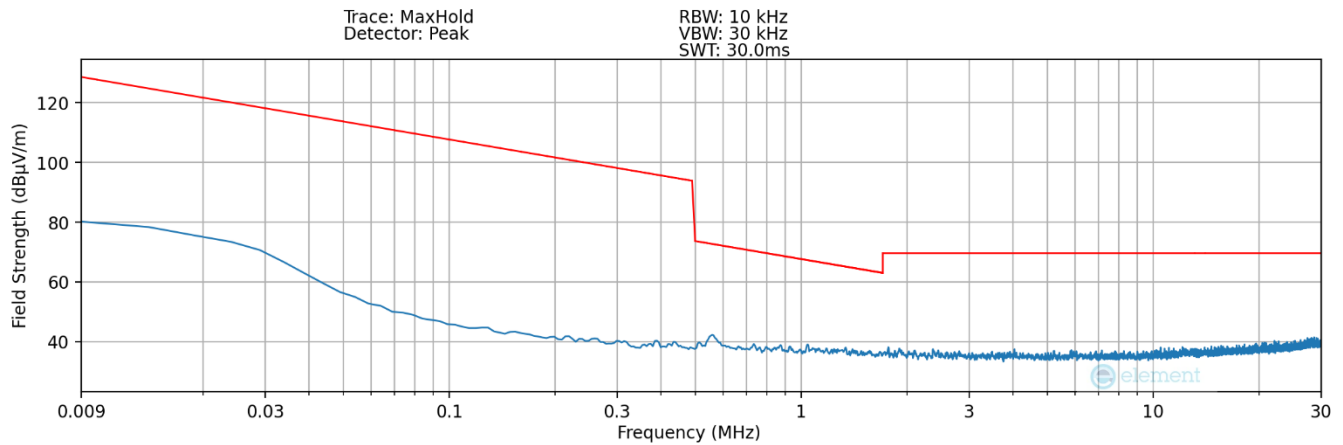

Plot 7-13. Radiated Spurious Plot 9kHz – 30MHz (Pol. X – Digitizer – Hover)

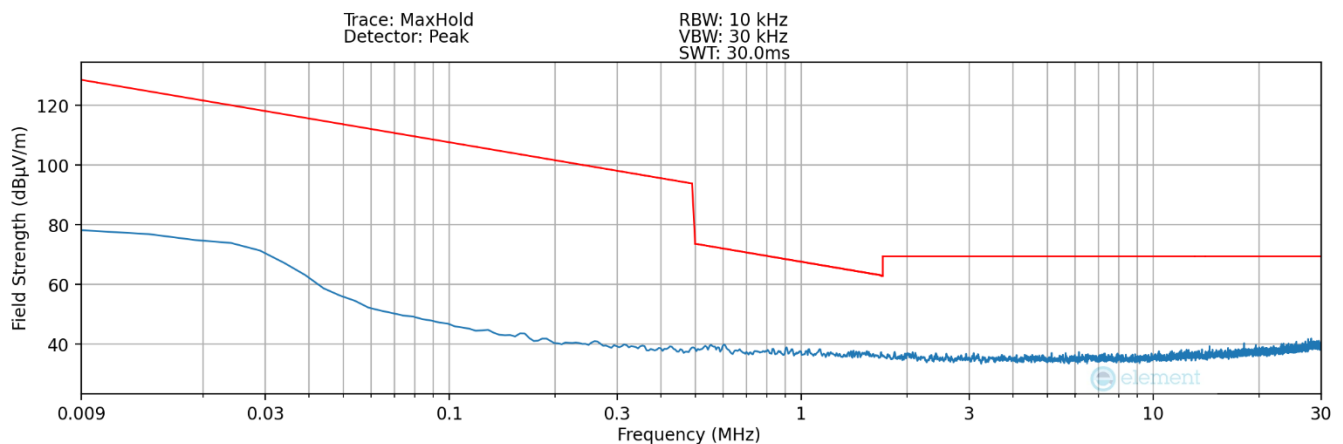

Plot 7-14 Radiated Spurious Plot 9kHz – 30MHz (Pol. Y – Digitizer – Hover)

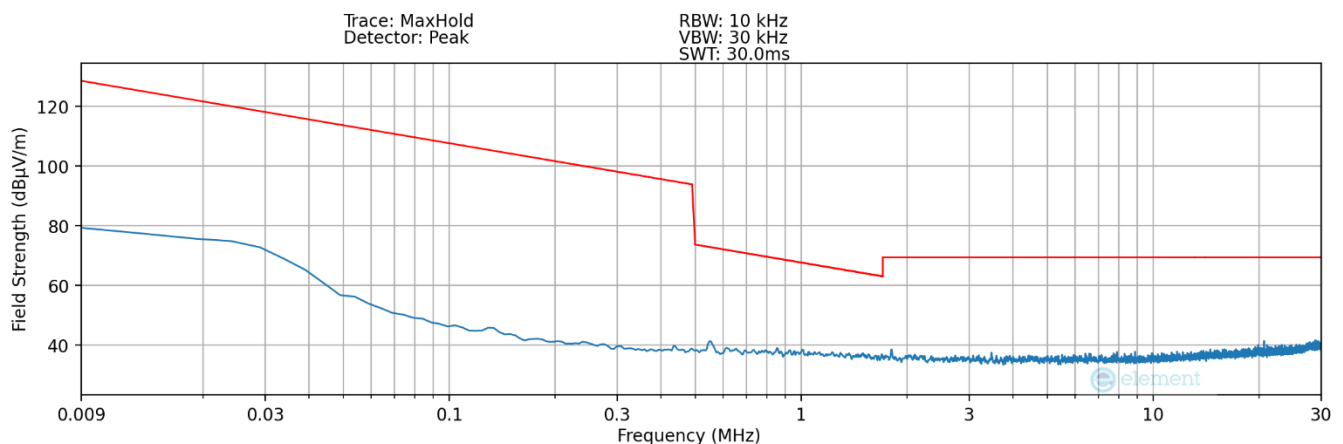

Plot 7-15. Radiated Spurious Plot 9kHz – 30MHz (Pol. Z – Digitizer – Hover)

FCC ID: A3LSMX910	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2303200036-11.A3L	Test Dates: 05/09 - 05/12/2023	EUT Type: Portable Tablet	Page 21 of 37



Radiated Spurious Emission Measurements, Out-of-Band §15.209:

Tx Frequency 562.5kHz

Measurement Distance: 3 Meters


Frequency [MHz]	Detector	Ant. Pol. [X/Y/Z]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	3m Field Strength [dBµV/m]	Distance Correction Factor	Corrected Field Strength [dBµV/m]	Limit [µV/m]	Limit [dBµV/m]	Margin [dB]
0.563	Quasi-Peak	X	100	229	-80.67	20.17	46.50	-40.00	6.50	42.67	32.60	-26.11
1.125	Quasi-Peak	X	-	-	-87.85	20.51	39.66	-40.00	-0.34	21.33	26.58	-26.92
1.688	Quasi-Peak	X	-	-	-88.12	20.49	39.37	-40.00	-0.63	14.22	23.06	-23.69
2.250	Quasi-Peak	X	-	-	-88.89	20.29	38.40	-40.00	-1.60	30.00	29.54	-31.15
2.813	Quasi-Peak	X	-	-	-89.16	21.05	38.89	-40.00	-1.11	30.00	29.54	-30.65
3.375	Quasi-Peak	X	-	-	-89.39	20.49	38.10	-40.00	-1.90	30.00	29.54	-31.44

Table 7-6. Radiated Measurements (Digitizer – Hover)


FCC ID: A3LSMX910	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2303200036-11.A3L	Test Dates: 05/09 - 05/12/2023	EUT Type: Portable Tablet	Page 22 of 37

Radiated Spurious Emission Measurements, Out-of-Band, Digitizer


§15.209

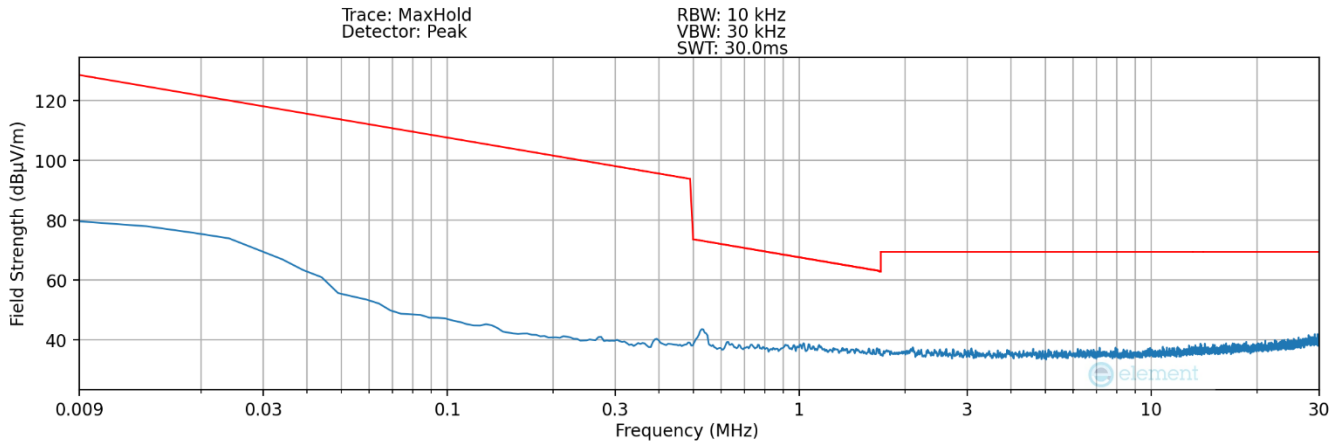

Plot 7-16. Radiated Spurious Plot 9kHz – 30MHz (Pol. X – Digitizer – Click)

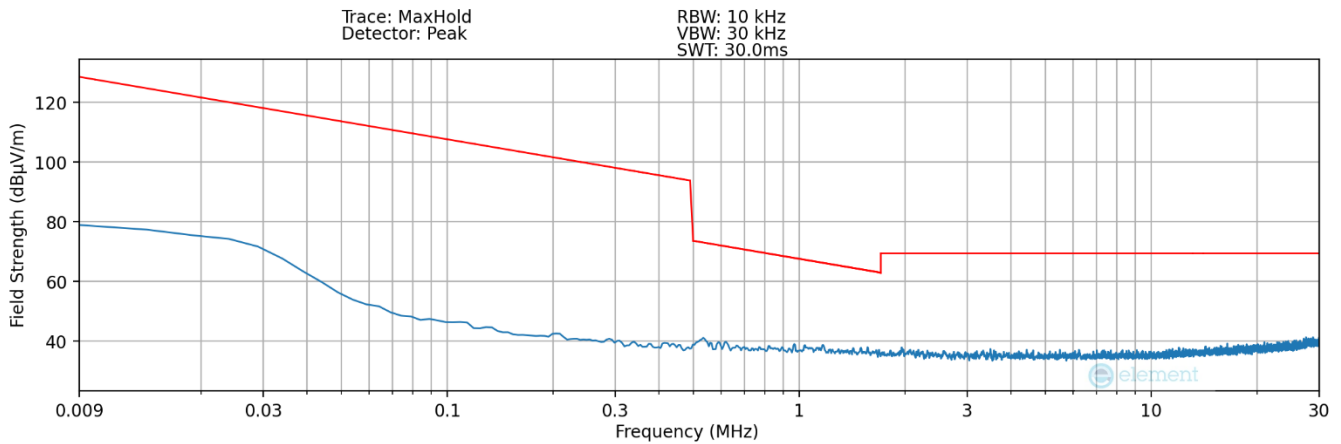

Plot 7-17 Radiated Spurious Plot 9kHz – 30MHz (Pol. Y – Digitizer – Click)

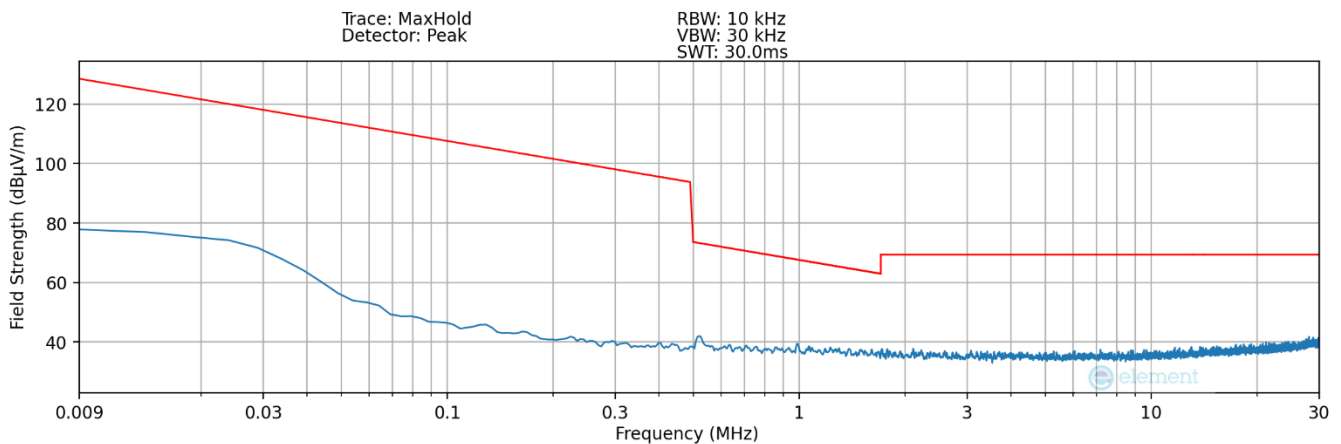

Plot 7-18. Radiated Spurious Plot 9kHz – 30MHz (Pol. Z – Digitizer – Click)

FCC ID: A3LSMX910	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2303200036-11.A3L	Test Dates: 05/09 - 05/12/2023	EUT Type: Portable Tablet	Page 23 of 37



Radiated Spurious Emission Measurements, Out-of-Band §15.209:

Tx Frequency 531.25kHz

Measurement Distance: 3 Meters


Frequency [MHz]	Detector	Ant. Pol. [X/Y/Z]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	3m Field Strength [dBµV/m]	Distance Correction Factor	Corrected Field Strength [dBµV/m]	Limit [µV/m]	Limit [dBµV/m]	Margin [dB]
0.531	Quasi-Peak	X	100	229	-79.26	20.12	47.86	-40.00	7.86	45.18	33.10	-25.24
1.063	Quasi-Peak	X	-	-	-87.34	20.49	40.15	-40.00	0.15	22.59	27.08	-26.92
1.594	Quasi-Peak	X	-	-	-88.60	20.53	38.93	-40.00	-1.07	15.06	23.56	-24.62
2.125	Quasi-Peak	X	-	-	-88.75	20.79	39.04	-40.00	-0.96	30.00	29.54	-30.50
2.656	Quasi-Peak	X	-	-	-89.18	20.35	38.17	-40.00	-1.83	30.00	29.54	-31.37
3.188	Quasi-Peak	X	-	-	-89.17	20.81	38.64	-40.00	-1.36	30.00	29.54	-30.90

Table 7-7. Radiated Measurements (Digitizer – Click)


FCC ID: A3LSMX910	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2303200036-11.A3L	Test Dates: 05/09 - 05/12/2023	EUT Type: Portable Tablet	Page 24 of 37

Radiated Spurious Emission Measurements, Out-of-Band, Digitizer


§15.209

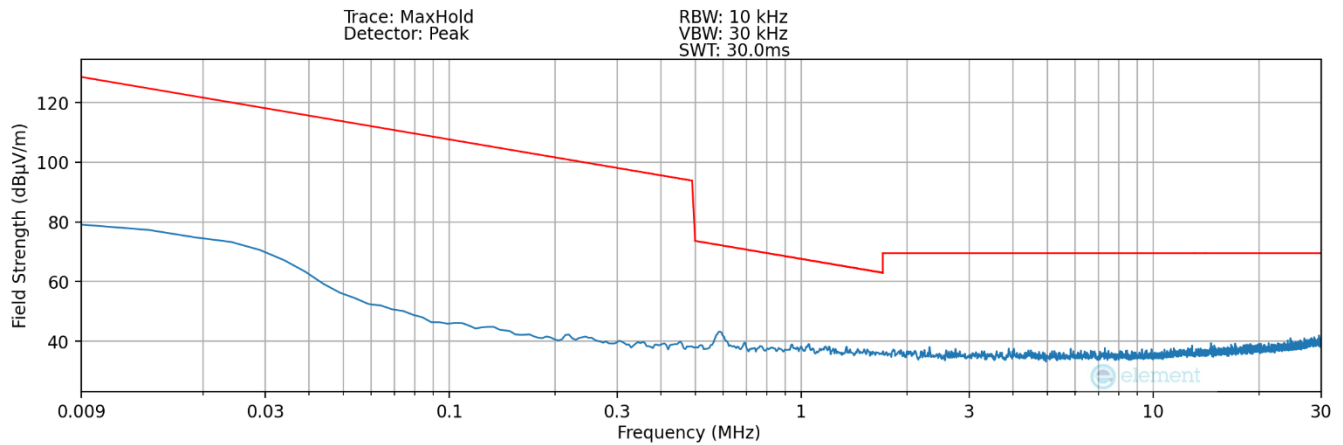

Plot 7-19. Radiated Spurious Plot 9kHz – 30MHz (Pol. X – Digitizer – Eraser)

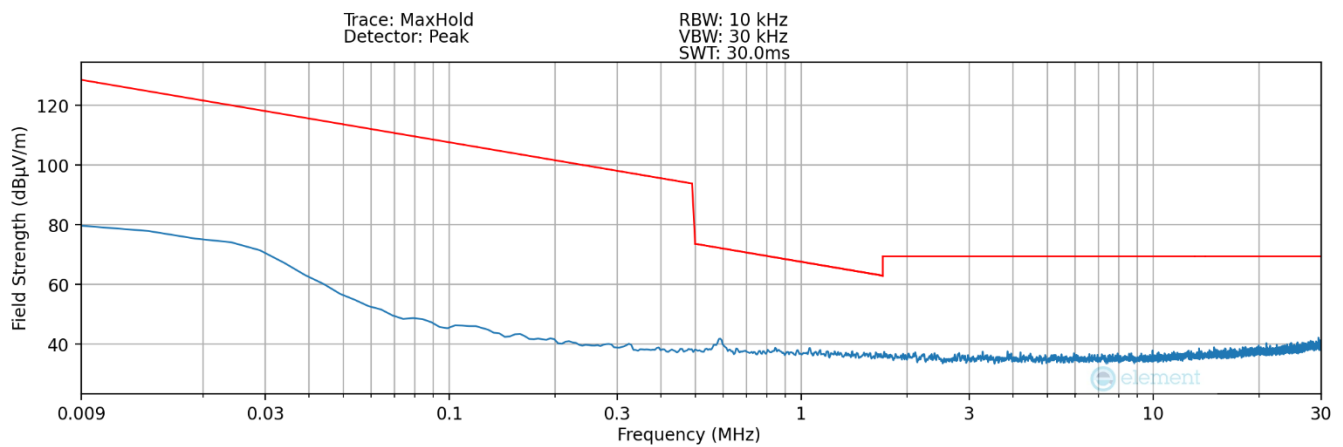

Plot 7-20 Radiated Spurious Plot 9kHz – 30MHz (Pol. Y – Digitizer – Eraser)

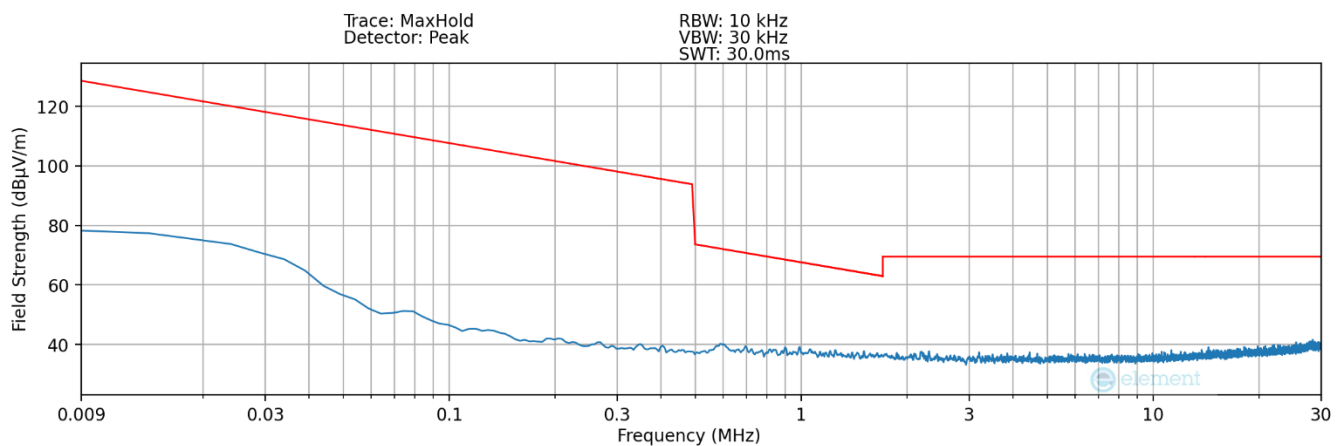

Plot 7-21. Radiated Spurious Plot 9kHz – 30MHz (Pol. Z – Digitizer – Eraser)

FCC ID: A3LSMX910	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2303200036-11.A3L	Test Dates: 05/09 - 05/12/2023	EUT Type: Portable Tablet	Page 25 of 37



Radiated Spurious Emission Measurements, Out-of-Band §15.209:

Tx Frequency 593.7kHz

Measurement Distance: 3 Meters


Frequency [MHz]	Detector	Ant. Pol. [X/Y/Z]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	3m Field Strength [dBµV/m]	Distance Correction Factor	Corrected Field Strength [dBµV/m]	Limit [µV/m]	Limit [dBµV/m]	Margin [dB]
0.594	Quasi-Peak	X	100	142	-78.41	20.14	48.73	-40.00	8.73	40.42	32.13	-23.40
1.187	Quasi-Peak	X	-	-	-86.98	20.52	40.54	-40.00	0.54	20.21	26.11	-25.57
1.781	Quasi-Peak	X	-	-	-88.93	20.57	38.64	-40.00	-1.36	30.00	29.54	-30.90
2.375	Quasi-Peak	X	-	-	-88.98	20.35	38.37	-40.00	-1.63	30.00	29.54	-31.17
2.969	Quasi-Peak	X	-	-	-89.52	20.58	38.06	-40.00	-1.94	30.00	29.54	-31.48
3.562	Quasi-Peak	X	-	-	-89.41	20.41	38.00	-40.00	-2.00	30.00	29.54	-31.54

Table 7-8. Radiated Measurements (Digitizer – Eraser)


FCC ID: A3LSMX910	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2303200036-11.A3L	Test Dates: 05/09 - 05/12/2023	EUT Type: Portable Tablet	Page 26 of 37

Radiated Spurious Emission Measurements, Out-of-Band, Digitizer


§15.209

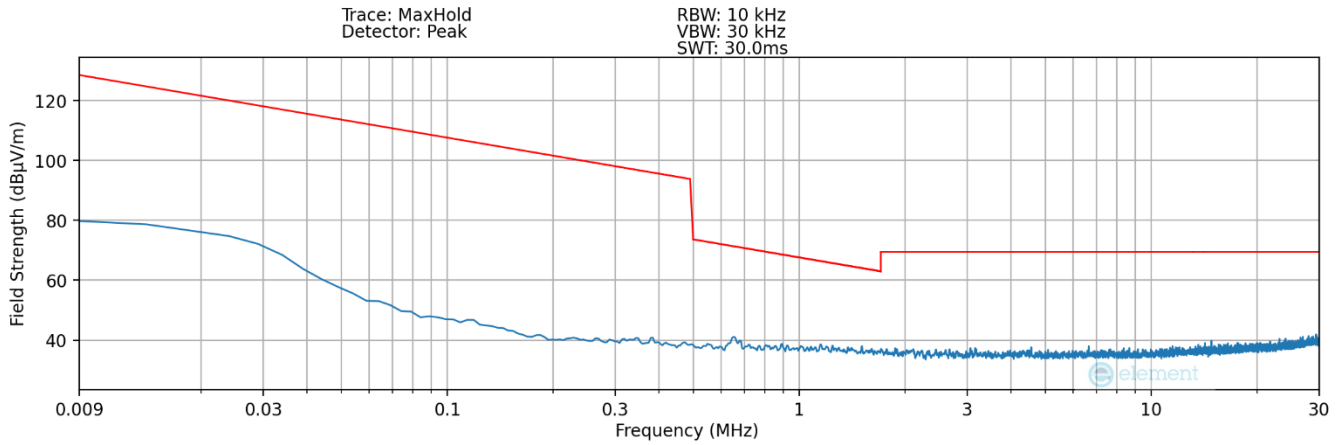

Plot 7-22. Radiated Spurious Plot 9kHz – 30MHz (Pol. X – Digitizer – Keyboard Cover Detect)

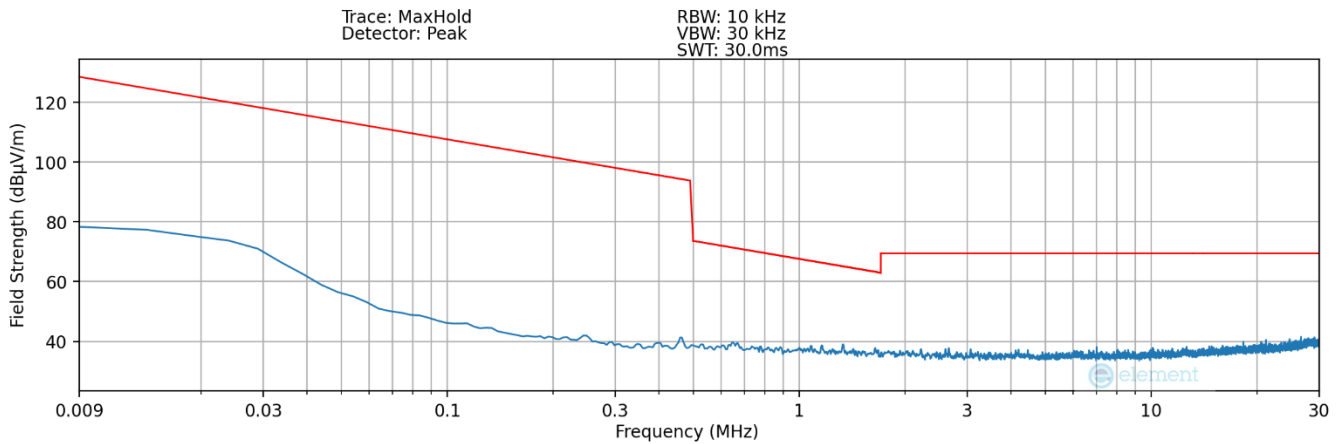

Plot 7-23 Radiated Spurious Plot 9kHz – 30MHz (Pol. Y – Digitizer – Keyboard Cover Detect)

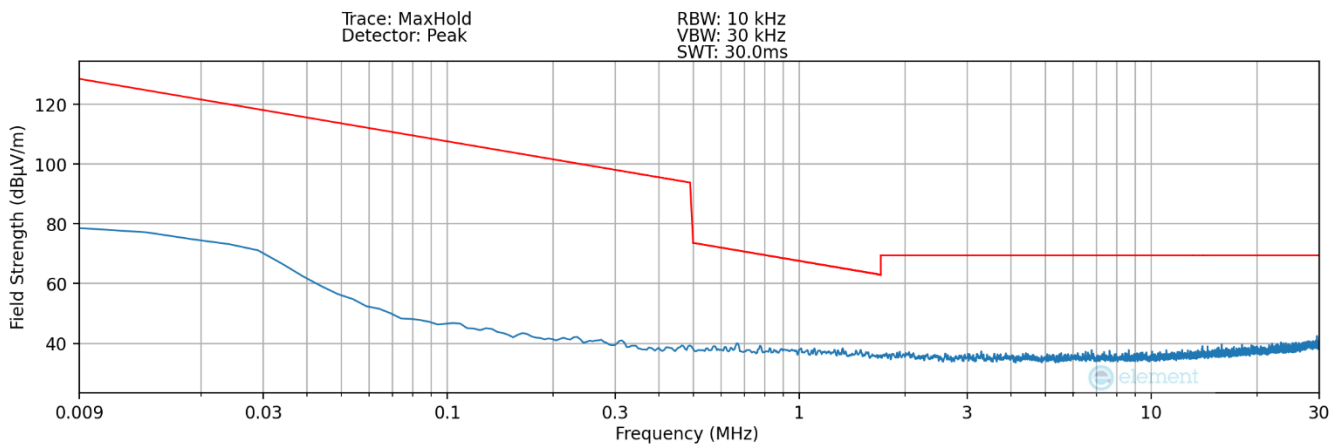

Plot 7-24. Radiated Spurious Plot 9kHz – 30MHz (Pol. Z – Digitizer – Keyboard Cover Detect)

FCC ID: A3LSMX910	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2303200036-11.A3L	Test Dates: 05/09 - 05/12/2023	EUT Type: Portable Tablet	Page 27 of 37



Radiated Spurious Emission Measurements, Out-of-Band §15.209:

Tx Frequency 656.25kHz

Measurement Distance: 3 Meters

Frequency [MHz]	Detector	Ant. Pol. [X/Y/Z]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	3m Field Strength [dBµV/m]	Distance Correction Factor	Corrected Field Strength [dBµV/m]	Limit [µV/m]	Limit [dBµV/m]	Margin [dB]
0.656	Quasi-Peak	X	100	298	-82.36	20.15	44.79	-40.00	4.79	36.57	31.26	-26.48
1.313	Quasi-Peak	X	-	-	-87.65	20.49	39.84	-40.00	-0.16	18.29	25.24	-25.40
1.969	Quasi-Peak	X	-	-	-89.25	20.54	38.29	-40.00	-1.71	30.00	29.54	-31.25
2.625	Quasi-Peak	X	-	-	-89.65	20.80	38.15	-40.00	-1.85	30.00	29.54	-31.39
3.281	Quasi-Peak	X	-	-	-89.07	21.11	39.04	-40.00	-0.96	30.00	29.54	-30.50
3.938	Quasi-Peak	X	-	-	-90.17	21.10	37.93	-40.00	-2.07	30.00	29.54	-31.61

Table 7-9. Radiated Measurements (Digitizer – Keyboard Cover Detect)

FCC ID: A3LSMX910	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2303200036-11.A3L	Test Dates: 05/09 - 05/12/2023	EUT Type: Portable Tablet	Page 28 of 37

7.4 Line Conducted Measurement Data

§15.207

Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

All conducted emissions must not exceed the limits shown in the table below, per Section 15.207 and RSS-Gen (8.8).

Frequency of emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

Table 7-10. Conducted Limits

*Decreases with the logarithm of the frequency.

Test Procedures Used

ANSI C63.10-2013, Section 6.2

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: A3LSMX910	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2303200036-11.A3L	Test Dates: 05/09 - 05/12/2023	EUT Type: Portable Tablet	Page 29 of 37

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.


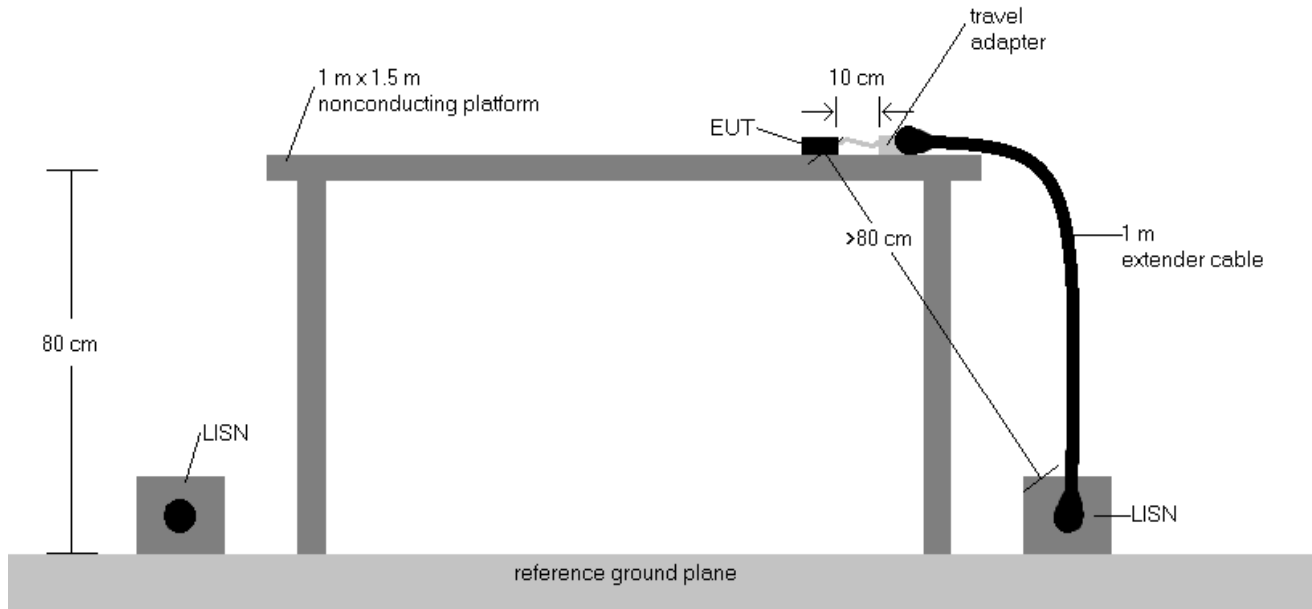


Figure 7-2. Test Instrument & Measurement Setup


Test Notes

1. All modes of operation were investigated and the worst-case emissions are reported using mid channel. The emissions found were not affected by the choice of channel used during testing.
2. The limit for an intentional radiator from 150kHz to 30MHz are specified in 15.207 and RSS-Gen (8.8).
3. $\text{Corr. (dB)} = \text{Cable loss (dB)} + \text{LISN insertion factor (dB)}$
4. $\text{QP/AV Level (dB}\mu\text{V)} = \text{QP/AV Analyzer/Receiver Level (dB}\mu\text{V)} + \text{Corr. (dB)}$
5. $\text{Margin (dB)} = \text{QP/AV Limit (dB}\mu\text{V)} - \text{QP/AV Level (dB}\mu\text{V)}$
6. Traces shown in plot are made using a peak detector.
7. Deviations to the Specifications: None.

FCC ID: A3LSMX910	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2303200036-11.A3L	Test Dates: 05/09 - 05/12/2023	EUT Type: Portable Tablet	Page 30 of 37

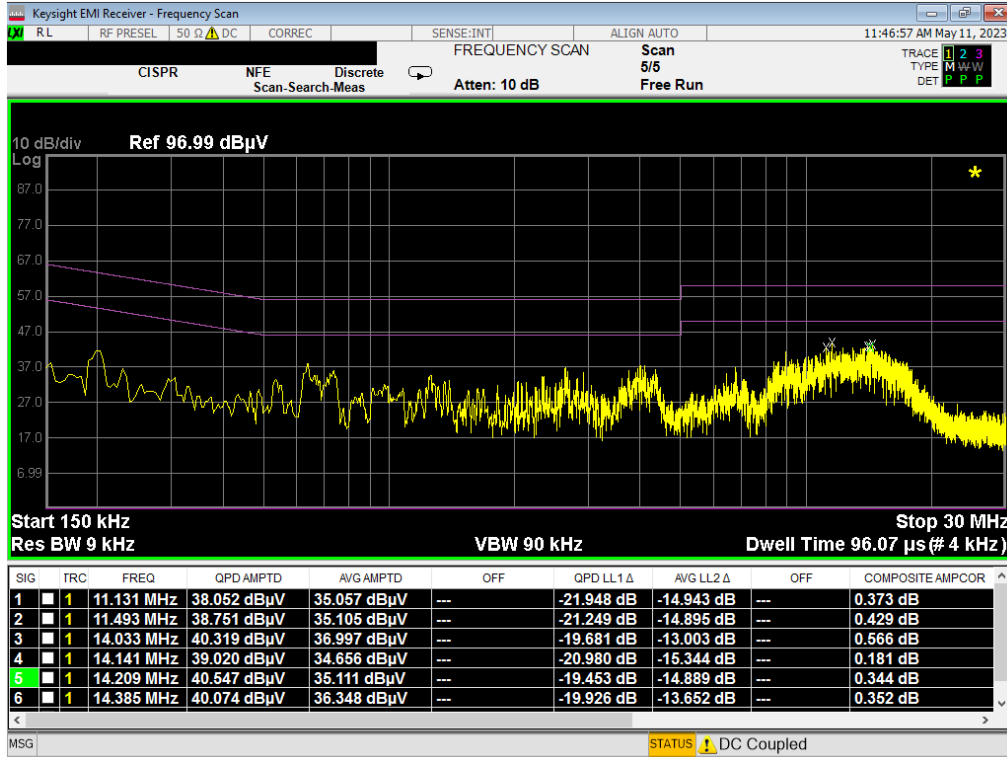


Plot 7-25. Line-Conducted Test Plot (L1) - Device to Pen _ SPEN Detection 1

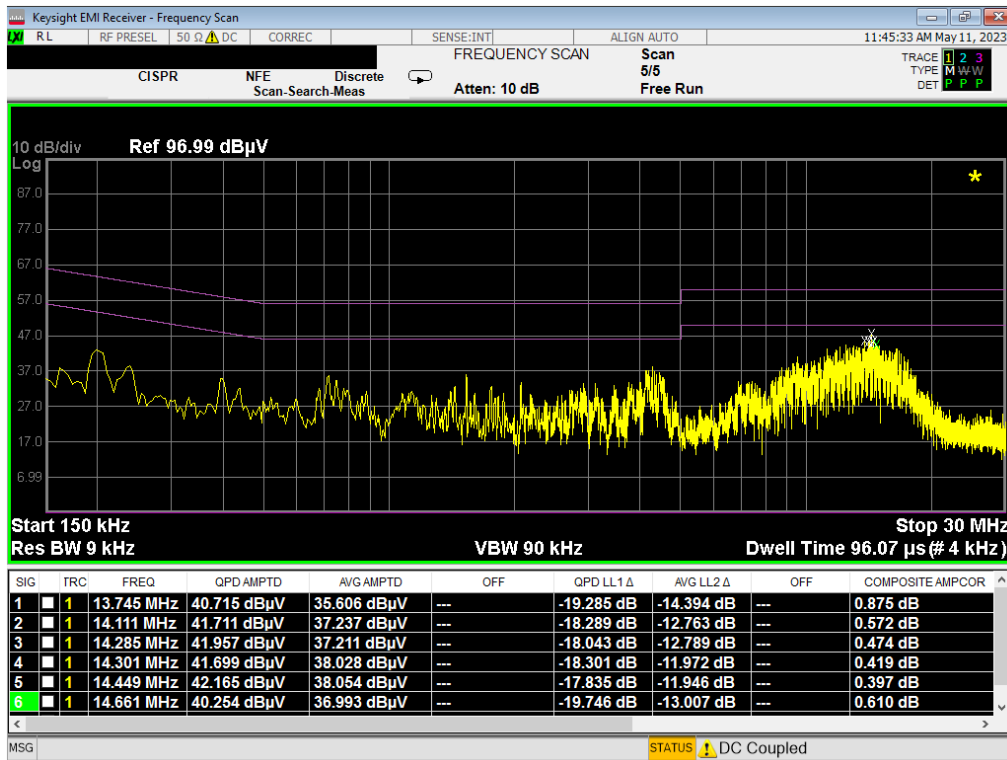


Plot 7-26. Line-Conducted Test Plot (N) - Device to Pen _ SPEN Detection 1

FCC ID: A3LSMX910		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2303200036-11.A3L	Test Dates: 05/09 - 05/12/2023	EUT Type: Portable Tablet		Page 31 of 37

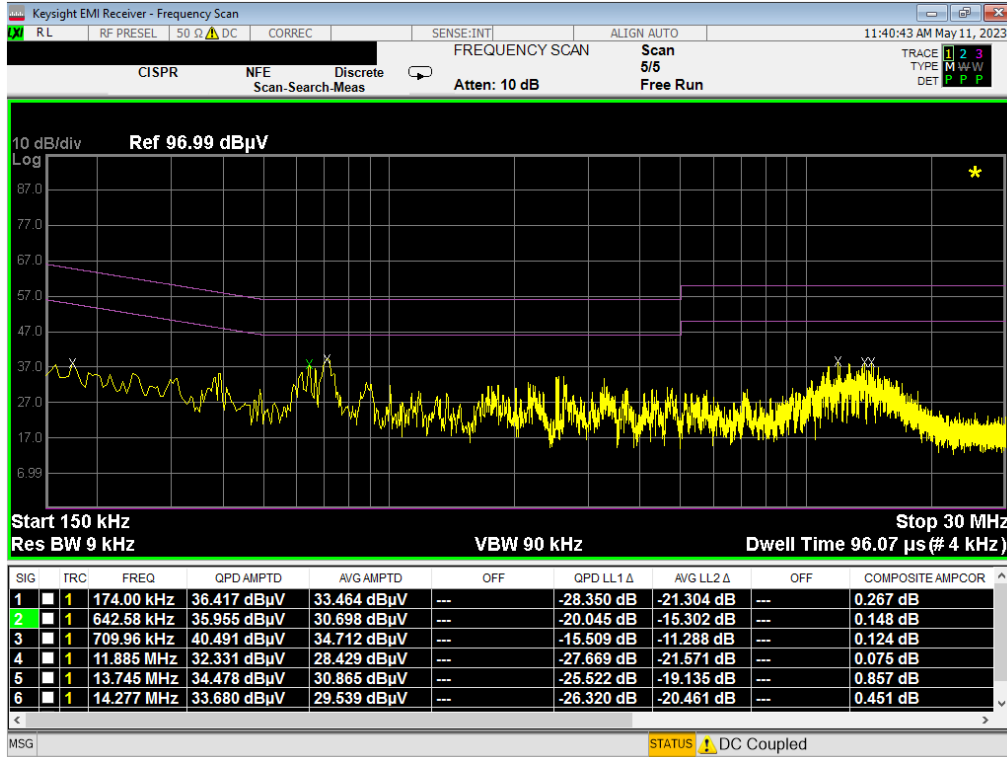


Plot 7-27. Line-Conducted Test Plot (L1) - Device to Pen _ SPEN Detection 2

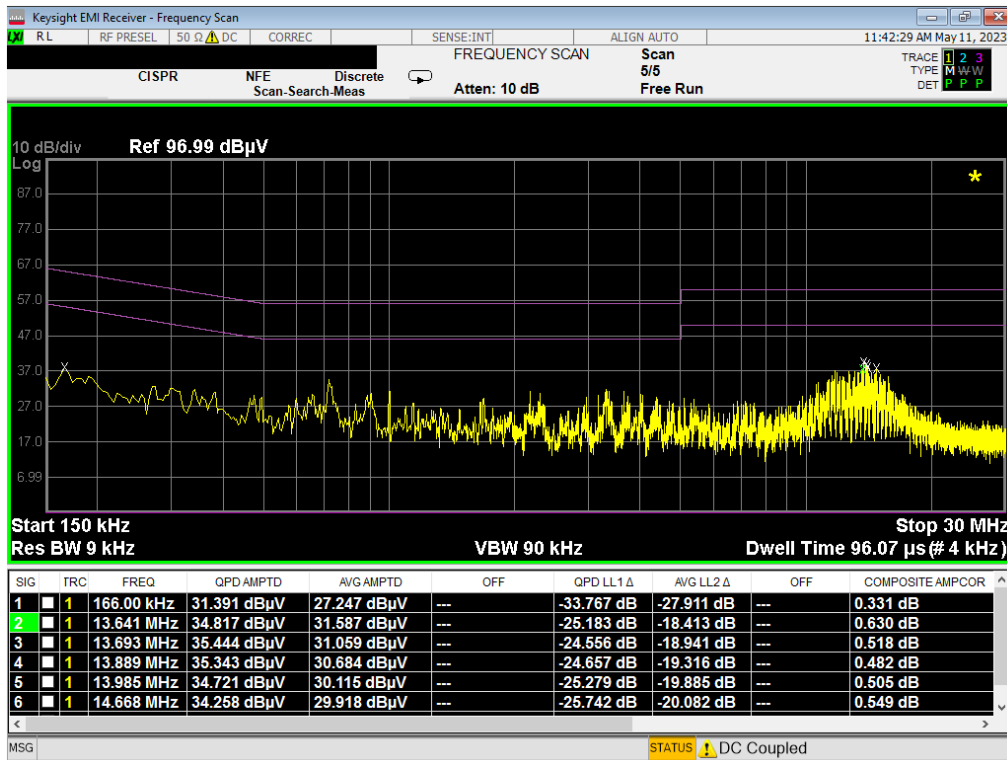


Plot 7-28. Line-Conducted Test Plot (N) - Device to Pen _ SPEN Detection 2

FCC ID: A3LSMX910	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2303200036-11.A3L	Test Dates: 05/09 - 05/12/2023	EUT Type: Portable Tablet	Page 32 of 37

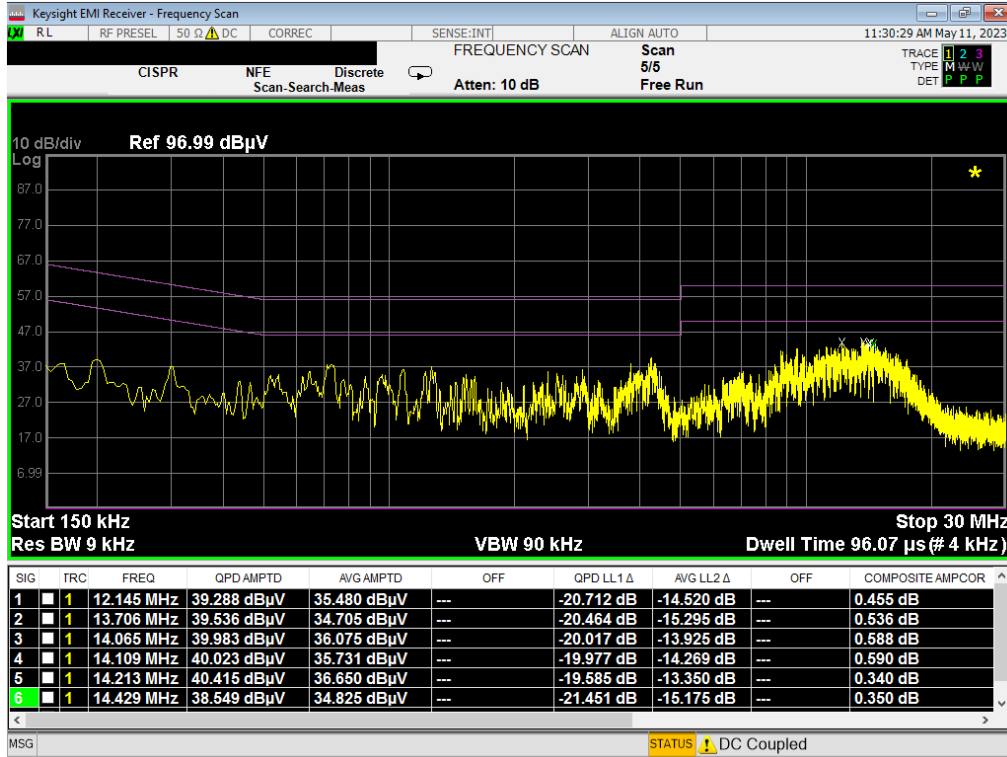


Plot 7-29. Line-Conducted Test Plot (L1) - Hover

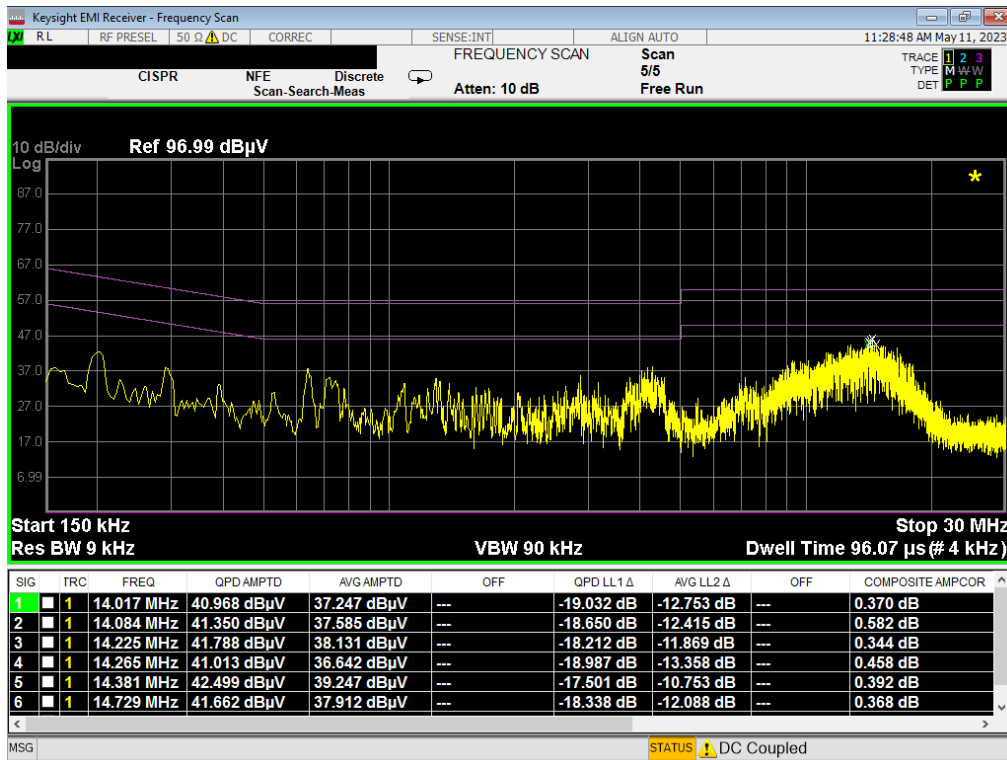


Plot 7-30. Line-Conducted Test Plot (N) - Hover

FCC ID: A3LSMX910	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2303200036-11.A3L	Test Dates: 05/09 - 05/12/2023	EUT Type: Portable Tablet	Page 33 of 37

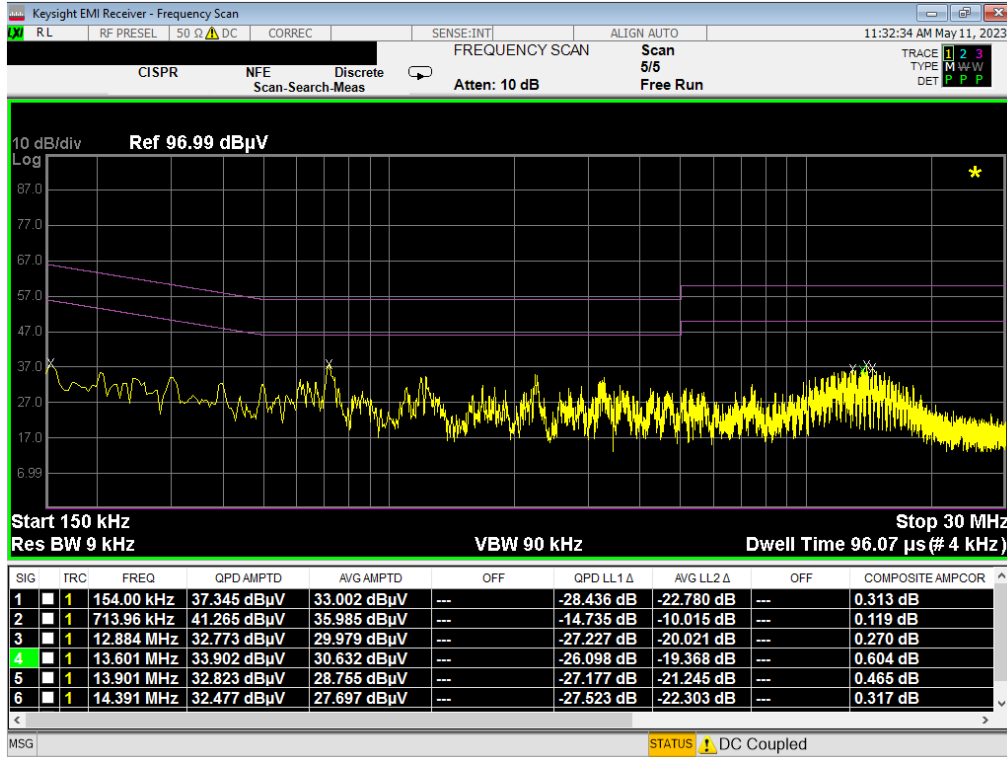


Plot 7-31. Line-Conducted Test Plot (L1) - Click

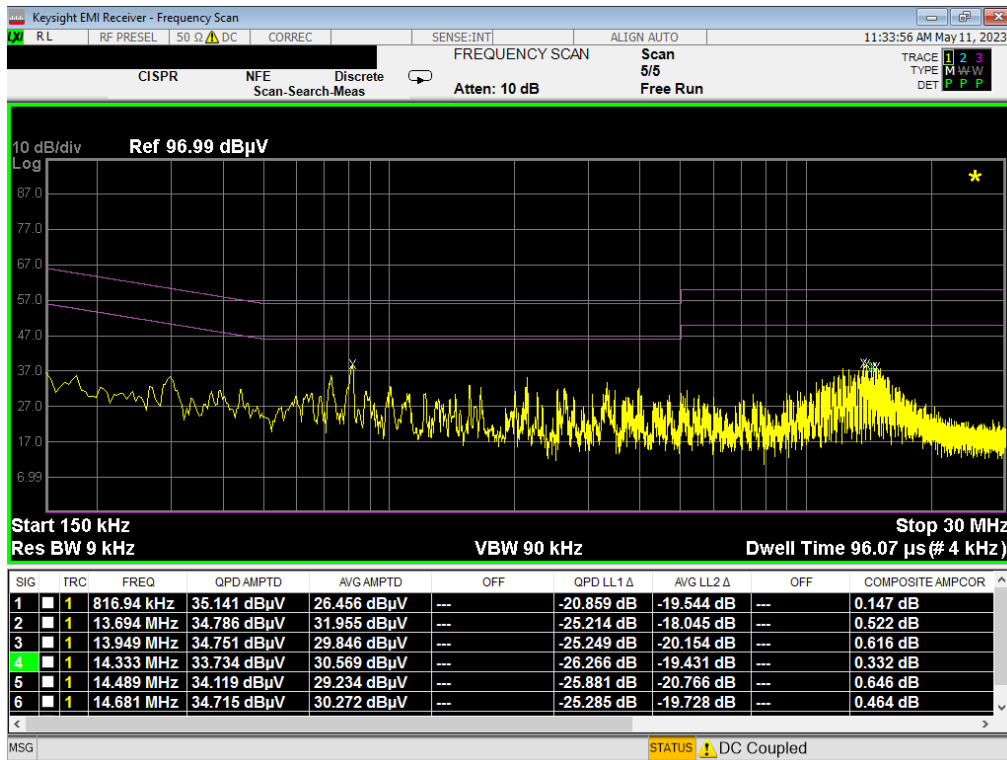


Plot 7-32. Line-Conducted Test Plot (N) - Click

FCC ID: A3LSMX910	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2303200036-11.A3L	Test Dates: 05/09 - 05/12/2023	EUT Type: Portable Tablet	Page 34 of 37

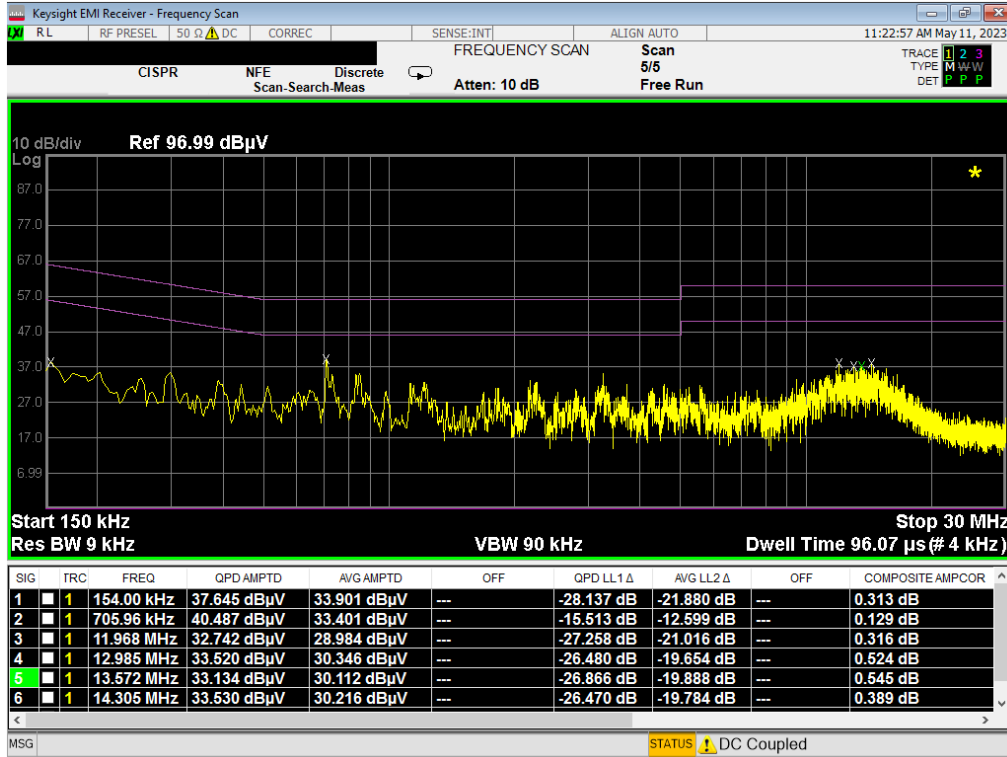


Plot 7-33. Line-Conducted Test Plot (L1) - Eraser

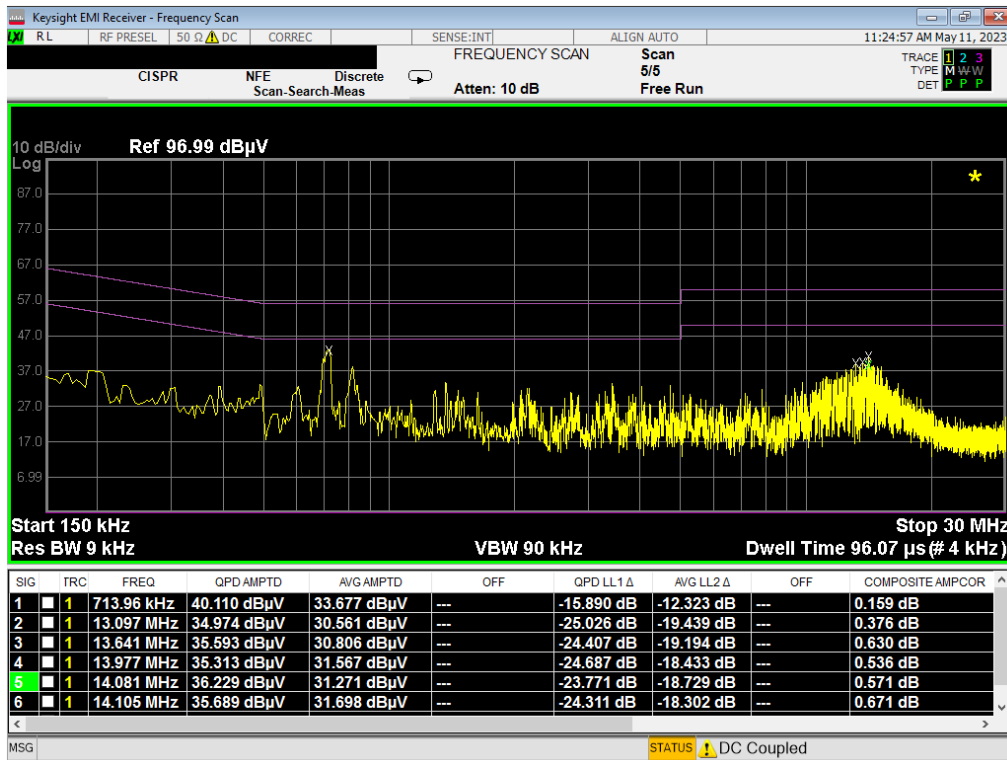


Plot 7-34. Line-Conducted Test Plot (N) - Eraser

FCC ID: A3LSMX910		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2303200036-11.A3L	Test Dates: 05/09 - 05/12/2023	EUT Type: Portable Tablet		Page 35 of 37

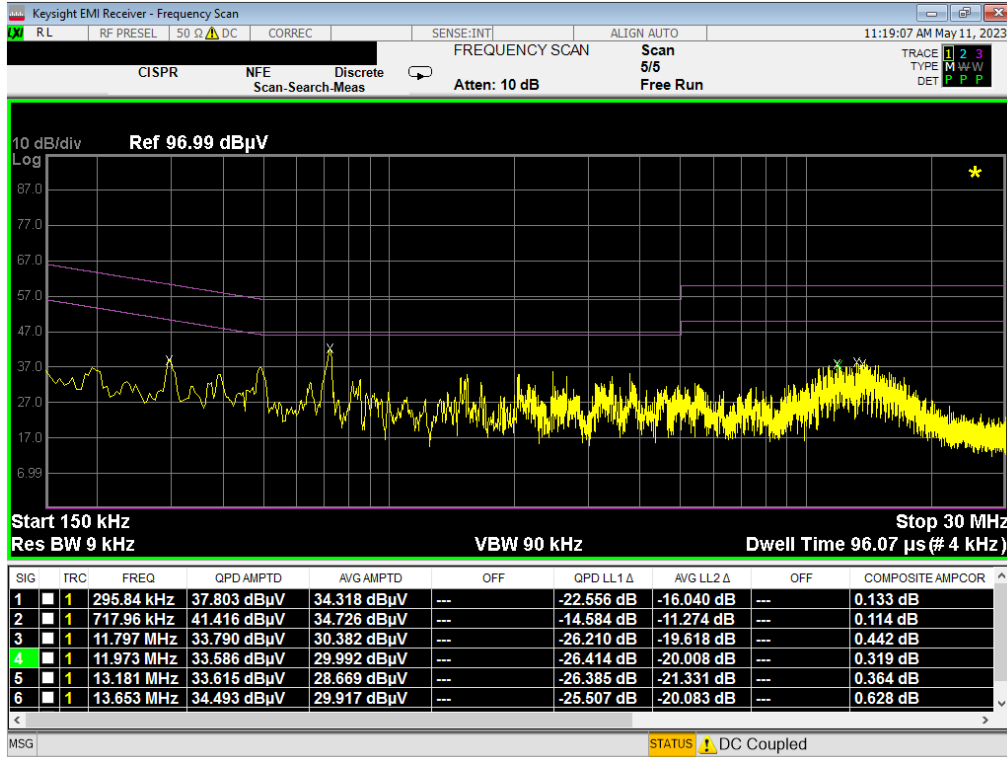

Plot 7-35. Line-Conducted Test Plot (L1) - Keyboard Cover Detect

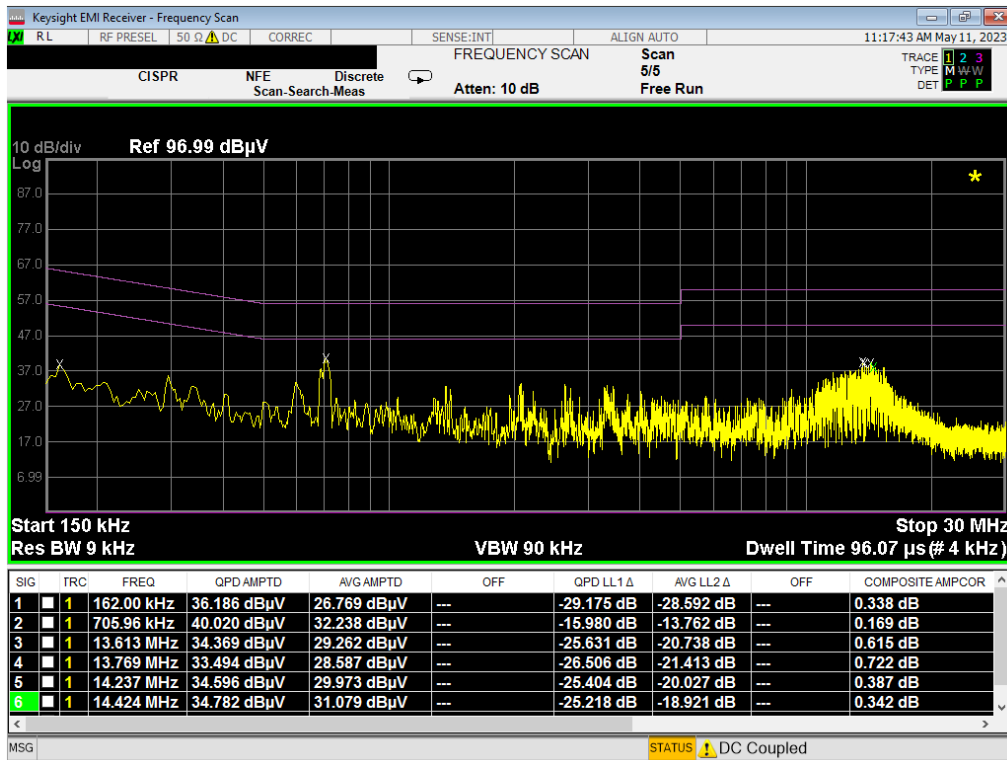

Plot 7-36. Line-Conducted Test Plot (N) - Keyboard Cover Detect

FCC ID: A3LSMX910	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2303200036-11.A3L	Test Dates: 05/09 - 05/12/2023	EUT Type: Portable Tablet	Page 36 of 37

8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **Samsung Portable Tablet FCC ID: A3LSMX910** has been verified to comply with the requirements specified in Part 15 (§15.207 and §15.209) of the FCC Rules.

FCC ID: A3LSMX910	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2303200036-11.A3L	Test Dates: 05/09 - 05/12/2023	EUT Type: Portable Tablet	Page 37 of 37