



ELEMENT SUWON
 13, Heungdeok 1-ro, Giheung-gu, Yongin-si,
 Gyeonggi-do, 16954 South Korea
 Tel. 031.660.7319 / Fax 031.660.7318
<http://www.element.com>

MEASUREMENT REPORT
FCC PART 15.247 802.11be (OFDMA)

Applicant Name:
 Samsung Electronics Co., Ltd.
 129, Samsung-ro,
 Yeongtong-gu, Suwon-si
 Gyeonggi-do, 16677, Korea

Date of Testing:
 12/15/2023 – 1/11/2024
Test Report Issue Date:
 1/19/2024
Test Site/Location:
 Element lab., Gyeonggi-do, South Korea
Test Report Serial No.:
 1M2312180128-03.A3L

FCC ID:	A3LSMX910
IC:	649E-SMX910
APPLICANT:	Samsung Electronics Co., Ltd.

Application Type: Class II Permissive Change
Original Grant Date: 06/08/2023
Model/HVIN: SM-X910
EUT Type: Portable Tablet
Frequency Range: 2412 – 2472MHz
Modulation Type: OFDMA
FCC Classification: Digital Transmission System (DTS)
FCC Rule Part(s): Part 15 Subpart C (15.247)
ISED Specification: RSS-247 Issue 3
Test Procedure(s): ANSI C63.10-2013
Class II Permissive Change: Enabling WiFi 7 functionality via software

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

Prepared by

Reviewed by

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Technical Manager
Test Report S/N: 1M2312180128-03.A3L	Test Dates: 12/15/2023 – 1/11/2024	EUT Type: Portable Tablet	Page 1 of 54

TABLE OF CONTENTS

1.0	INTRODUCTION.....	4
1.1	Scope	4
1.2	Element Test Location.....	4
1.3	Test Facility / Accreditations.....	4
2.0	PRODUCT INFORMATION	5
2.1	Equipment Description	5
2.2	Device Capabilities.....	5
2.3	Test Configuration	6
2.4	Antenna Description	6
2.5	Software and Firmware	7
2.6	EMI Suppression Device(s)/Modifications	7
3.0	DESCRIPTION OF TESTS	8
3.1	Evaluation Procedure	8
3.2	Radiated Emissions.....	8
3.3	Environmental Conditions.....	8
4.0	ANTENNA REQUIREMENTS	9
5.0	MEASUREMENT UNCERTAINTY.....	10
6.0	TEST EQUIPMENT CALIBRATION DATA.....	11
7.0	TEST RESULTS.....	12
7.1	Summary	12
7.2	Output Power Measurement.....	13
7.3	Power Spectral Density	16
7.3.1	SISO Antenna-2 Power Spectral Density Measurements.....	17
7.3.2	MIMO Power Spectral Density Measurements.....	25
7.4	Radiated Emission Measurements.....	41
7.4.1	SISO Antenna-2 Radiated Spurious Emission Measurements	45
7.4.2	MIMO Radiated Spurious Emission Measurements	46
7.4.3	SISO Antenna-2 Radiated Restricted Band Edge Measurements	47
7.4.4	MIMO Radiated Restricted Band Edge Measurements	51
8.0	CONCLUSION	54

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Technical Manager
Test Report S/N: 1M2312180128-03.A3L	Test Dates: 12/15/2023 – 1/11/2024	EUT Type: Portable Tablet	Page 2 of 54

MEASUREMENT REPORT

Channel Bandwidth [MHz]	IEEE Mode	Tones	Tx Frequency [MHz]	Antenna-2				MIMO			
				Avg. Conducted		Peak Conducted		Avg. Conducted		Peak Conducted	
				Max. Power [mW]	Max. Power [dBm]	Max. Power [mW]	Max. Power [dBm]	Max. Power [mW]	Max. Power [dBm]	Max. Power [mW]	Max. Power [dBm]
20	802.11be OFDMA	52+26T	2412 - 2472	18.79	12.74	195.43	22.91	38.02	15.80	451.72	26.55
	802.11be OFDMA	106+26T	2412 - 2472	30.27	14.81	297.85	24.74	59.91	17.78	567.59	27.54

EUT Overview

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Technical Manager
Test Report S/N: 1M2312180128-03.A3L	Test Dates: 12/15/2023 – 1/11/2024	EUT Type: Portable Tablet	Page 3 of 54

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2 Element Test Location

These measurement tests were conducted at the Element Suwon Laboratory located at 13, Heungdeok 1-ro, Giheung-gu, Yongin-si, Gyeonggi-do, 16954, South Korea. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

1.3 Test Facility / Accreditations

Measurements were performed at Element Materials Technology Suwon, Ltd. located in Yongin-si, Gyeonggi-do, 16954, South Korea.

- Element Materials Technology Suwon, Ltd. is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation(A2LA) with Certificate number 2041.04 for Specific Absorption Rate (SAR), and Electromagnetic Compatibility (EMC) & Telecommunications testing for FCC and Innovation, Science, and Economic Development Canada rules.
- Element Materials Technology Suwon, Ltd. facility is accredited, designated, and recognized in accordance with the provision of Radio Wave Act and International Standard ISO/IEC 17025:2017 under the National Radio Research Agency.
 - Designation Number / CABID: KR0169
 - Test Firm Registration Number of FCC: 417945
 - Test Firm Registration Number of ISED: 26168

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Technical Manager
Test Report S/N: 1M2312180128-03.A3L	Test Dates: 12/15/2023 – 1/11/2024	EUT Type: Portable Tablet	Page 4 of 54

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Samsung Portable Tablet FCC ID: A3LSMX910, IC: 649E-SMX910**. The test data contained in this report pertains only to the emissions due to the EUT's WLAN (DTS) transmitter.

Test Device Serial No.: 0150M, 4628G, 3657M

2.2 Device Capabilities

This device contains the following capabilities:

802.11b/g/n/ax/be WLAN, 802.11a/n/ac/ax/be UNII (5 and 6 GHz), Bluetooth (1x, EDR, LE), Wireless Power Transfer

Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
1	2412	8	2447
2	2417	9	2452
3	2422	10	2457
4	2427	11	2462
5	2432	12	2467
6	2437	13	2472
7	2442		

Table 2-1. Frequency/ Channel Operations

Notes:

1. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = peak per the guidance of Section 6.0 b) of ANSI C63.10-2013 and KDB 558074 D01 v05r02. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Mode	Antenna	Bandwidth	Channel	Tone	Duty Cycle
		[MHz]			
802.11be DTS RU	1/2	20	6	26T	99.44
				52T	99.46
				52T+26T	99.26
				106T	98.97
				106T+26T	98.73
				242T	98.78
802.11be DTS RU	MIMO	20	6	26T	98.94
				52T	98.99
				52T+26T	98.64
				106T	98.19
				106T+26T	97.81
				242T	97.80

Table 2-2. Measured Duty Cycles

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Technical Manager
Test Report S/N: 1M2312180128-03.A3L	Test Dates: 12/15/2023 – 1/11/2024	EUT Type: Portable Tablet	Page 5 of 54



2. The device employs MIMO technology. Below are the possible configurations.

WiFi Configurations		SISO		SDM		CDD	
		ANT1	ANT2	ANT1	ANT2	ANT1	ANT2
2.4GHz	11ax	✗	✓	✓	✓	✓	✓
	11be	✗	✓	✓	✓	✓	✓

Table 2-3. Antenna Configuration

✓ = Support ; ✗ = NOT Support

SISO = Single Input Single Output

SDM = Spatial Diversity Multiplexing – MIMO function

CDD = Cyclic Delay Diversity - 2Tx Function

3. The device supports the following data rates (shown in Mbps):

MCS Index	HE	EHT	Spatial Stream	OFDMA (802.11ax/be)												OFDMA (802.11be)					
				26T			52T			106T			242T			52+26T		106+26T			
				0.8µs GI	1.6µs GI	3.2µs GI	0.8µs GI	1.6µs GI	3.2µs GI	0.8µs GI	1.6µs GI	3.2µs GI	0.8µs GI	1.6µs GI	3.2µs GI	0.8µs GI	1.6µs GI	3.2µs GI	0.8µs GI	1.6µs GI	3.2µs GI
0	0	1	1	0.9	0.8	0.8	1.8	1.7	1.5	3.8	3.5	3.2	8.6	8.1	7.3	17.2	16.3	14.6	2.6	2.5	2.3
1	1	1	1	1.8	1.7	1.5	3.5	3.3	3	7.5	7.1	6.4	17.2	16.3	14.6	34.4	32.5	29.3	5.3	5	4.5
2	2	1	1	2.6	2.5	2.3	5.3	5	4.5	11.3	10.6	9.6	25.8	24.4	21.9	51.6	48.8	43.9	7.9	7.5	6.8
3	3	1	1	3.5	3.3	3	7.1	6.7	6	15	14.2	12.8	34.4	32.5	29.3	68.8	65	58.5	10.6	10	9
4	4	1	1	5.3	5	4.5	10.6	10	9	22.5	21.3	19.1	51.6	48.8	43.9	103.2	97.5	87.8	15.9	15	13.5
5	5	1	1	7.1	6.7	6	14.1	13.3	12	30	28.3	25.5	68.8	65	58.5	137.6	130	117	21.2	20	18
6	6	1	1	7.9	7.5	6.8	15.9	15	13.5	33.8	31.9	28.7	77.4	73.1	65.8	154.9	146.3	131.6	23.8	22.5	20.3
7	7	1	1	8.8	8.3	7.5	17.6	16.7	15	37.5	35.4	31.9	86	81.3	73.1	172.1	162.5	146.3	26.5	25	22.5
8	8	1	1	10.6	10	9	21.2	20	18	45	42.5	38.3	103.2	97.5	87.8	206.5	195	175.5	31.8	30	27
9	9	1	1	11.8	11.1	10	23.5	22.2	20	50	47.2	42.5	114.7	108.3	97.5	229.4	216.7	195	35.3	33.3	30
10	10	1	1	13.2	12.5	11.3	26.5	25	22.5	56.3	53.1	47.8	129	121.9	109.7	258.1	243.8	219.4	39.7	37.5	33.8
11	11	1	1	14.7	13.9	12.5	29.4	27.8	25	62.5	59	53.1	143.4	135.4	121.9	286.8	270.8	243.8	44.1	41.7	37.5
12	12	1	1	15.9	15	13.5	31.8	30	27	67.5	63.8	57.4	154.9	146.3	131.6	309.7	292.5	263.3	47.6	45	40.5
13	13	1	1	17.6	16.7	15	35.3	33.3	30	75	70.8	63.8	172.1	162.5	146.3	344.1	325	292.5	52.9	50	45
0	0	2	2	1.8	1.7	1.5	3.5	3.3	3	7.5	7.1	6.4	17.2	16.3	14.6	34.4	32.5	29.3	5.3	5	4.5
1	1	2	2	3.5	3.3	3	7.1	6.7	6	15	14.2	12.8	34.4	32.5	29.3	68.8	65	58.5	10.6	10	9
2	2	2	2	5.3	5	4.5	10.6	10	9	22.5	21.3	19.1	51.6	48.8	43.9	103.2	97.5	87.8	15.9	15	13.5
3	3	2	2	7.1	6.7	6	14.1	13.3	12	30	28.3	25.5	68.8	65	58.5	137.6	130	117	21.2	20	18
4	4	2	2	10.6	10	9	21.2	20	18	45	42.5	38.3	103.2	97.5	87.8	206.5	195	175.5	31.8	30	27
5	5	2	2	14.1	13.3	12	28.2	26.7	24	60	56.7	51	137.6	130	117	275.3	260	234	42.4	40	36
6	6	2	2	15.9	15	13.5	31.8	30	27	67.5	63.8	57.4	154.9	146.3	131.6	309.7	292.5	263.3	47.6	45	40.5
7	7	2	2	17.6	16.7	15	35.3	33.3	30	75	70.8	63.8	172.1	162.5	146.3	344.1	325	292.5	52.9	50	45
8	8	2	2	21.2	20	18	42.4	40	36	90	85	76.5	206.5	195	175.5	412.9	390	351	63.5	60	54
9	9	2	2	23.5	22.2	20	47.1	44.4	40	100	94.4	85	229.4	216.7	195	458.8	433.3	390	70.6	66.7	60
10	10	2	2	26.5	25	22.5	52.9	50	45	112.5	106.3	95.6	258.1	243.8	219.4	516.2	487.5	438.8	79.4	75	67.5
11	11	2	2	29.4	27.8	25	58.8	55.6	50	125	118.1	106.3	286.8	270.8	243.8	573.5	541.7	487.5	88.2	83.3	75
12	12	2	2	31.8	30	27	63.5	60	54	135	127.5	114.8	309.7	292.5	263.3	619.4	585	526.5	95.3	90	81
13	13	2	2	35.3	33.3	30	70.6	66.7	60	150	141.7	127.5	344.1	325	292.5	688.2	650	585	105.9	100	90

Table 2-4. Supported Data Rates

2.3 Test Configuration

ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing. See Sections 7.5 for radiated emissions test setups, and 7.2, 7.3 and 7.4 for antenna port conducted emissions test setups.

2.4 Antenna Description

The following antenna gains were used for the testing.

Frequency [GHz]	Antenna-1 Gain [dBi]	Antenna-2 Gain [dBi]	Directional Gain [dBi]
2.400	-5.39	-5.83	-2.60
2.451	-5.01	-6.21	-2.57
2.473	-5.42	-6.74	-3.04
2.480	-5.59	-6.45	-3.00

Table 2-5. Antenna Peak Gain

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Technical Manager
Test Report S/N: 1M2312180128-03.A3L	Test Dates: 12/15/2023 – 1/11/2024	EUT Type: Portable Tablet	Page 6 of 54



2.5 Software and Firmware

The test was conducted with software/firmware version X910XXU1BWL3 installed on the EUT.

2.6 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Technical Manager
Test Report S/N: 1M2312180128-03.A3L	Test Dates: 12/15/2023 – 1/11/2024	EUT Type: Portable Tablet	Page 7 of 54

3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedures described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2013) was used in the measurement of the EUT.

Deviation from measurement procedure.....None

3.2 Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. An 80cm tall test table made of Styrodur is placed on top of the turn table. For measurements above 1GHz, an additional Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33 depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014. Additionally, radiated emissions below 30MHz are also validated on an Open Area Test Site to assert correlation with the chamber measurements per the requirements of KDB 414788 D01 v01r01.

3.3 Environmental Conditions

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Technical Manager
Test Report S/N: 1M2312180128-03.A3L	Test Dates: 12/15/2023 – 1/11/2024	EUT Type: Portable Tablet	Page 8 of 54

4.0 ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antennas of the EUT are **permanently attached**.
- There are no provisions for connections to an external antenna.

Conclusion:

The EUT unit complies with the requirement of §15.203.

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Technical Manager
Test Report S/N: 1M2312180128-03.A3L	Test Dates: 12/15/2023 – 1/11/2024	EUT Type: Portable Tablet	Page 9 of 54

5.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty (\pm dB)
Conducted Bench Top Measurements	1.95
Line Conducted Disturbance	3.09
Radiated Disturbance (<1GHz)	4.10
Radiated Disturbance (>1GHz)	4.82
Radiated Disturbance (>18GHz)	4.96

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Technical Manager
Test Report S/N: 1M2312180128-03.A3L	Test Dates: 12/15/2023 – 1/11/2024	EUT Type: Portable Tablet	Page 10 of 54

6.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent	N9030A	PXA Signal Analyzer	7/6/2023	Annual	7/3/2024	MY49432391
Anritsu	S820E	Cable and Antenna Analyzer	7/4/2023	Annual	7/3/2024	1839097
Anritsu	TOSLKF50A-40	Calibration Kit	N/A	-	N/A	1825024
Com-Power	AL-130R	Active Loop Antenna	10/21/2022	Biennial	10/20/2024	10160045
Fairview Microwave	FM2CP1122-10	Coupler	7/4/2023	Annual	7/3/2024	1946
Keysight Technologies	N9030B	PXA Signal Analyzer	4/6/2023	Annual	4/5/2024	MY57142018
Mini-Circuits	BW-N10W5+	Attenuator	4/6/2023	Annual	4/5/2024	TEMPNO.01-151
Rohde & Schwarz	TS-PR1840	Preamplifier	7/6/2023	Annual	7/5/2024	100049
Rohde & Schwarz	ESW	EMI TEST Receiver	7/5/2023	Annual	7/4/2024	101761
Rohde & Schwarz	FSW43	Signal & Spectrum Analyzer	4/6/2023	Annual	4/5/2024	101250
Rohde & Schwarz	TS-SFUNIT-Rx	Shielded Filter Unit	1/13/2023	Annual	1/12/2024	102151
Schwarzbeck	VULB9162	Broadband TRILOG Antenna	6/1/2023	Biennial	5/31/2025	9162-217
Sunol Sciences	DRH-118	Horn Antenna	1/26/2023	Biennial	1/25/2025	A102416-1
Anritsu	MA24106A	Power Sensor	7/4/2023	Annual	7/3/2024	1244512

Table 6-1. Annual Test Equipment Calibration Schedule

Note:

1. For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.
2. Equipment with a calibration date of "N/A" shown in this list was not used to make direct calibrated measurements.

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Technical Manager
Test Report S/N: 1M2312180128-03.A3L	Test Dates: 12/15/2023 – 1/11/2024	EUT Type: Portable Tablet	Page 11 of 54

7.0 TEST RESULTS

7.1 Summary

Company Name: Samsung Electronics CO., Ltd.
 FCC ID: A3LSMX910
 IC: 649E-SMX910
 FCC Classification: Digital Transmission System (DTS)

FCC Part Section(s)	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.247(b)(3)	RSS-247 [5.4(b)]	Transmitter Output Power	shall not exceed 1 W	CONDUCTED	PASS	Section 7.2
N/A	RSS-247 [5.4(b)]	e.i.r.p	Shall not exceed 4 W		PASS	Section 7.2
15.247(e)	RSS-247 [5.2(b)]	Transmitter Power Spectral Density	shall not be greater than 8 dBm in any 3 kHz band		PASS	Section 7.3
15.205 15.209	RSS-Gen [8.9]	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209 (RSS-Gen [8.9])	RADIATED	PASS	Section 7.4

Table 7-1. Summary of Test Results

Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst-case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is Element "WLAN Automation," Version 3.5 .
- 5) For radiated band edge, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is Element "Chamber Automation," Version 1.6.4.
- 6) 802.11ax/be OFDMA testing was performed for all signal tone configurations as specified by the 802.11ax standard. Worst case results are determined and reported per the guidance provided at the October 2018 TCB Workshop.

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Technical Manager
Test Report S/N: 1M2312180128-03.A3L	Test Dates: 12/15/2023 – 1/11/2024	EUT Type: Portable Tablet	Page 12 of 54

7.2 Output Power Measurement

Test Overview and Limits

A transmitter antenna terminal of EUT is connected to the input of an RF power sensor. Measurement is made using a broadband power meter capable of making peak and average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

The maximum permissible conducted output power is 1 Watt per 15.247 and RSS-247. The e.i.r.p. shall not exceed 4 W per RSS-247.

Test Procedure Used

ANSI C63.10-2013 – Section 11.9.1.3 PKPM1 Peak Power Method
 ANSI C63.10-2013 – Section 11.9.2.3.2 Method AVGPM-G
 ANSI C63.10-2013 – Section 14.2 Measure-and-Sum Technique

Test Settings

Method PKPM1 (Peak Power Measurement)

Peak power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The pulse sensor employs a VBW = 50MHz so this method was only used for signals whose DTS bandwidth was less than or equal to 50MHz.

Method AVGPM-G (Average Power Measurement)

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.



Figure 7-1. Test Instrument & Measurement Setup for Power Meter Measurements

Test Notes

None.

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Technical Manager
Test Report S/N: 1M2312180128-03.A3L	Test Dates: 12/15/2023 – 1/11/2024	EUT Type: Portable Tablet	Page 13 of 54



Freq [MHz]	Channel	Tones	MRU Index	Conducted Power [dBm]		Conducted Power Limit [dBm]	Avg Conducted Power Margin [dB]	Peak Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
				Avg	Peak							
2412	1	52+26T	70	12.38	22.51	30.00	-17.62	-7.49	-5.83	6.55	36.02	-29.47
			71	12.25	22.24	30.00	-17.75	-7.76	-5.83	6.42	36.02	-29.60
			72	12.47	22.57	30.00	-17.53	-7.43	-5.83	6.64	36.02	-29.38
2437	6	52+26T	70	12.74	22.84	30.00	-17.26	-7.16	-5.83	6.91	36.02	-29.11
			71	12.63	22.49	30.00	-17.37	-7.51	-5.83	6.80	36.02	-29.22
			72	12.52	22.43	30.00	-17.48	-7.57	-5.83	6.69	36.02	-29.33
2462	11	52+26T	70	12.74	22.91	30.00	-17.26	-7.09	-5.83	6.91	36.02	-29.11
			71	12.56	22.37	30.00	-17.44	-7.63	-5.83	6.73	36.02	-29.29
			72	12.58	22.41	30.00	-17.42	-7.59	-5.83	6.75	36.02	-29.27
2467	12	52+26T	70	8.72	15.42	30.00	-21.28	-14.58	-5.83	2.89	36.02	-33.13
			71	8.54	15.23	30.00	-21.46	-14.77	-5.83	2.71	36.02	-33.31
			72	8.48	15.12	30.00	-21.52	-14.88	-5.83	2.65	36.02	-33.37
2472	13	52+26T	70	2.23	8.32	30.00	-27.77	-21.68	-5.83	-3.60	36.02	-39.62
			71	2.19	8.23	30.00	-27.81	-21.77	-5.83	-3.64	36.02	-39.66
			72	2.05	8.05	30.00	-27.95	-21.95	-5.83	-3.78	36.02	-39.80

Table 7-2. Conducted Output Power Measurements SISO ANT2 (52+26 Tones)

Freq [MHz]	Channel	Tones	MRU Index	Conducted Power [dBm]		Conducted Power Limit [dBm]	Avg Conducted Power Margin [dB]	Peak Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
				Avg	Peak							
2412	1	106+26T	82	14.50	24.14	30.00	-15.50	-5.86	-5.83	8.67	36.02	-27.35
			83	14.81	24.74	30.00	-15.19	-5.26	-5.83	8.98	36.02	-27.04
2437	6	106+26T	82	14.71	24.46	30.00	-15.29	-5.54	-5.83	8.88	36.02	-27.14
			83	14.45	24.45	30.00	-15.55	-5.55	-5.83	8.62	36.02	-27.40
2462	11	106+26T	82	14.76	24.51	30.00	-15.24	-5.49	-5.83	8.93	36.02	-27.09
			83	14.56	24.43	30.00	-15.44	-5.57	-5.83	8.73	36.02	-27.29
2467	12	106+26T	82	8.69	15.38	30.00	-21.31	-14.62	-5.83	2.86	36.02	-33.16
			83	8.25	15.03	30.00	-21.75	-14.97	-5.83	2.42	36.02	-33.60
2472	13	106+26T	82	2.32	8.39	30.00	-27.68	-21.61	-5.83	-3.51	36.02	-39.53
			83	2.02	8.03	30.00	-27.98	-21.97	-5.83	-3.81	36.02	-39.83

Table 7-3. Conducted Output Power Measurements SISO ANT2 (106+26 Tones)

Freq [MHz]	Channel	Tones	MRU Index	Conducted Power [dBm]						Conducted Power Limit [dBm]	Avg Conducted Power Margin [dB]	Peak Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
				Antenna-1		Antenna-2		MIMO								
				AVG	PEAK	AVG	PEAK	AVG	PEAK							
2412	1	52+26T	70	12.99	23.85	12.28	22.89	15.66	26.41	30.00	-14.34	-3.59	-2.57	13.09	36.02	-22.93
			71	12.98	23.76	12.24	22.85	15.64	26.34	30.00	-14.36	-3.66	-2.57	13.07	36.02	-22.95
			72	12.73	23.31	12.47	22.93	15.61	26.13	30.00	-14.39	-3.87	-2.57	13.04	36.02	-22.98
			70	12.57	23.09	12.65	23.16	15.62	26.14	30.00	-14.38	-3.86	-2.57	13.05	36.02	-22.97
2437	6	52+26T	71	12.54	23.03	12.58	23.11	15.57	26.08	30.00	-14.43	-3.92	-2.57	13.00	36.02	-23.02
			72	12.68	23.14	12.41	22.63	15.56	25.90	30.00	-14.44	-4.10	-2.57	12.99	36.02	-23.03
			70	12.98	23.92	12.59	23.12	15.80	26.55	30.00	-14.20	-3.45	-2.57	13.23	36.02	-22.79
			71	12.96	23.75	12.46	23.11	15.73	26.45	30.00	-14.27	-3.55	-2.57	13.16	36.02	-22.86
2462	11	52+26T	72	12.47	22.68	12.41	22.62	15.45	25.66	30.00	-14.55	-4.34	-2.57	12.88	36.02	-23.14
			70	5.72	12.46	5.42	11.84	8.58	15.17	30.00	-21.42	-14.83	-2.57	6.01	36.02	-30.01
			71	5.59	12.23	5.39	11.59	8.50	14.93	30.00	-21.50	-15.07	-2.57	5.93	36.02	-30.09
			72	5.03	11.91	5.31	11.24	8.18	14.60	30.00	-21.82	-15.40	-2.57	5.61	36.02	-30.41
2467	12	52+26T	70	0.15	5.44	-0.32	4.52	2.93	8.01	30.00	-27.07	-21.99	-2.57	0.36	36.02	-35.66
			71	0.12	5.38	-0.36	4.48	2.90	7.96	30.00	-27.10	-22.04	-2.57	0.33	36.02	-35.69
			72	0.05	5.31	-0.41	4.43	2.84	7.90	30.00	-27.16	-22.10	-2.57	0.27	36.02	-35.75

Table 7-4. Conducted Output Power Measurements MIMO (52+26 Tones)

Freq [MHz]	Channel	Tones	MRU Index	Conducted Power [dBm]						Conducted Power Limit [dBm]	Avg Conducted Power Margin [dB]	Peak Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
				Antenna-1		Antenna-2		MIMO								
				AVG	PEAK	AVG	PEAK	AVG	PEAK							
2412	1	106+26T	82	14.99	24.67	14.32	23.98	17.68	27.35	30.00	-12.32	-2.65	-2.57	15.11	36.02	-20.91
			83	14.78	24.54	14.75	24.52	17.78	27.54	30.00	-12.22	-2.46	-2.57	15.21	36.02	-20.81
			82	14.79	24.55	14.64	24.49	17.73	27.53	30.00	-12.27	-2.47	-2.57	15.16	36.02	-20.86
2437	6	106+26T	83	14.94	24.59	14.35	24.42	17.67	27.52	30.00	-12.33	-2.48	-2.57	15.10	36.02	-20.92
			82	14.67	24.23	14.21	24.15	17.46	27.20	30.00	-12.54	-2.80	-2.57	14.89	36.02	-21.13
			83	14.56	24.35	14.33	24.44	17.46	27.41	30.00	-12.54	-2.59	-2.57	14.89	36.02	-21.13
2462	11	106+26T	82	5.73	12.38	5.53	12.19	8.65	15.30	30.00	-21.35	-14.70	-2.57	6.08	36.02	-29.94
			83	5.02	11.86	5.83	12.54	8.45	15.22	30.00	-21.55	-14.78	-2.57	5.88	36.02	-30.14
			70	0.11	5.36	-0.35	4.49	2.90	7.96	30.00	-27.10	-22.04	-2.57	0.33	36.02	-35.69
2472	13	106+26T	83	0.03	5.28	-0.44	4.41	2.81	7.88	30.00	-27.19	-22.12	-2.57	0.24	36.02	-35.78

Table 7-5. Conducted Output Power Measurements MIMO (106+26 Tones)

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Technical Manager
Test Report S/N: 1M2312180128-03.A3L	Test Dates: 12/15/2023 – 1/11/2024	EUT Type: Portable Tablet	Page 14 of 54



Note:

Per ANSI C63.10-2013 Section 14.2, the conducted powers at Antenna 1 and Antenna 2 were first measured separately during MIMO transmission as shown in the section above. The measured values were then summed in linear power units then converted back to dBm.

Sample MIMO Calculation:

At 2412MHz the average conducted output power was measured to be 12.99 dBm for Antenna 1 and 12.28 dBm for Antenna 2.

$$\text{Antenna 1} + \text{Antenna 2} = \text{MIMO}$$

$$(12.99 \text{ dBm} + 12.28 \text{ dBm}) = (19.91 \text{ mW} + 16.90 \text{ mW}) = 36.81 \text{ mW} = 15.66 \text{ dBm}$$

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Technical Manager
Test Report S/N: 1M2312180128-03.A3L	Test Dates: 12/15/2023 – 1/11/2024	EUT Type: Portable Tablet	Page 15 of 54

7.3 Power Spectral Density

Test Overview and Limit

The peak power density is measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates, tones configurations, and RU indices were investigated and the worst-case configuration results are reported in this section.

The maximum permissible power spectral density shall not be greater than 8 dBm in any 3 kHz band.

Test Procedure Used

ANSI C63.10-2013 – Section 11.10.2 Method PKPSD
ANSI C63.10-2013 – Section 14.3.1 Measure-and-Sum Technique

Test Settings

1. Analyzer was set to the center frequency of the DTS channel under investigation
2. Span = 1.5 times the DTS channel bandwidth
3. RBW = 3kHz
4. VBW = 1MHz
5. Detector = peak
6. Sweep time = auto couple
7. Trace mode = max hold
8. Trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-2. Test Instrument & Measurement Setup

Test Notes


1. Based on preliminary measurements, it was determined that, of all of the tone configurations, the 26T configuration produced the worst case power spectral density measurement for partial loaded case. Therefore, only the 26 Tone configuration and 242 Tone data is included in this section.
2. The power spectral density for each channel was measured with the RU index showing the highest conducted power.

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Technical Manager
Test Report S/N: 1M2312180128-03.A3L	Test Dates: 12/15/2023 – 1/11/2024	EUT Type: Portable Tablet	Page 16 of 54

7.3.1 SISO Antenna-2 Power Spectral Density Measurements


Frequency [MHz]	Channel No.	802.11 Mode	Tones	Data Rate [Mbps]	RU Index	Measured Power Spectral Density [dBm]	Maximum Permissible Power Density [dBm / 3kHz]	Margin [dB]	Pass / Fail
2412	1	be	52+26T	MCS0	70	-8.79	8.00	-16.79	Pass
2412	1	be	52+26T	MCS0	71	-8.72	8.00	-16.72	Pass
2412	1	be	52+26T	MCS0	72	-8.36	8.00	-16.36	Pass
2437	6	be	52+26T	MCS0	70	-8.85	8.00	-16.85	Pass
2437	6	be	52+26T	MCS0	71	-8.34	8.00	-16.34	Pass
2437	6	be	52+26T	MCS0	72	-8.58	8.00	-16.58	Pass
2462	11	be	52+26T	MCS0	70	-8.81	8.00	-16.81	Pass
2462	11	be	52+26T	MCS0	71	-8.35	8.00	-16.35	Pass
2462	11	be	52+26T	MCS0	72	-8.61	8.00	-16.61	Pass
2412	1	be	106+26T	MCS0	82	-9.64	8.00	-17.64	Pass
2412	1	be	106+26T	MCS0	83	-9.21	8.00	-17.21	Pass
2437	6	be	106+26T	MCS0	82	-9.21	8.00	-17.21	Pass
2437	6	be	106+26T	MCS0	83	-8.76	8.00	-16.76	Pass
2462	11	be	106+26T	MCS0	82	-9.14	8.00	-17.14	Pass
2462	11	be	106+26T	MCS0	83	-9.14	8.00	-17.14	Pass

Table 7-6. Conducted Power Spectral Density Measurements SISO ANT2

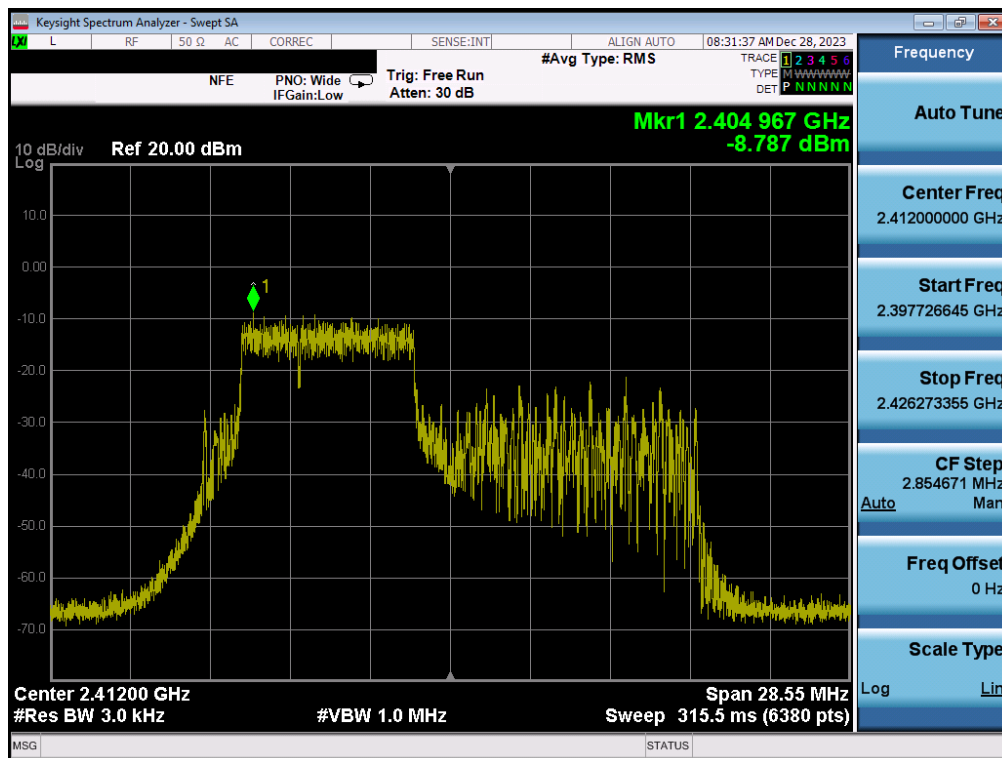


Plot 7-1. Power Spectral Density Plot SISO ANT2 (802.11ax OFDMA – 52+26 Tones – RU Index 70 – Ch. 1)

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Technical Manager
Test Report S/N: 1M2312180128-03.A3L	Test Dates: 12/15/2023 – 1/11/2024	EUT Type: Portable Tablet	Page 17 of 54

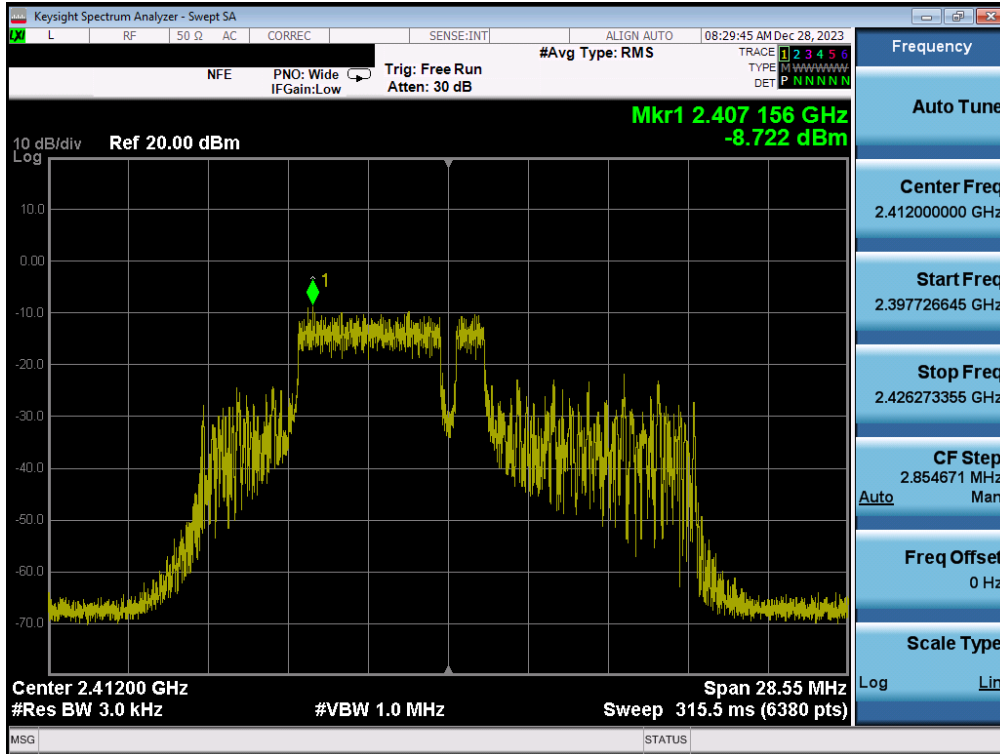


Plot 7-2. Power Spectral Density Plot SISO ANT2 (802.11ax OFDMA – 52+26 Tones – RU Index 71 – Ch. 1)

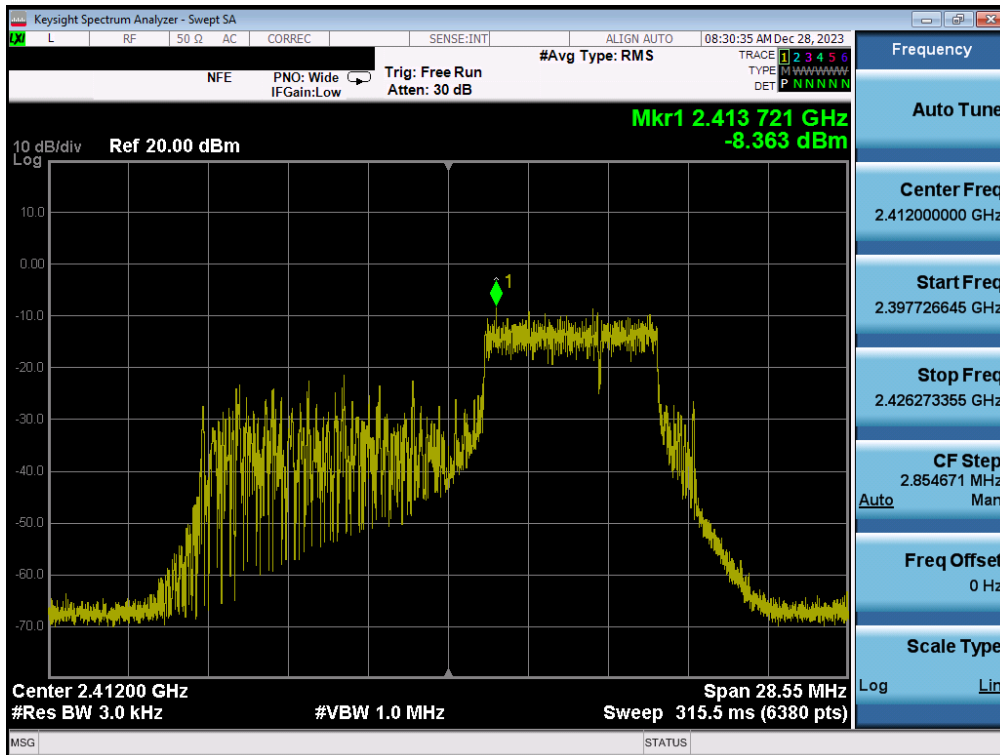


Plot 7-3. Power Spectral Density Plot SISO ANT2 (802.11ax OFDMA – 52+26 Tones – RU Index 72 – Ch. 1)

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Technical Manager
Test Report S/N: 1M2312180128-03.A3L	Test Dates: 12/15/2023 – 1/11/2024	EUT Type: Portable Tablet	Page 18 of 54

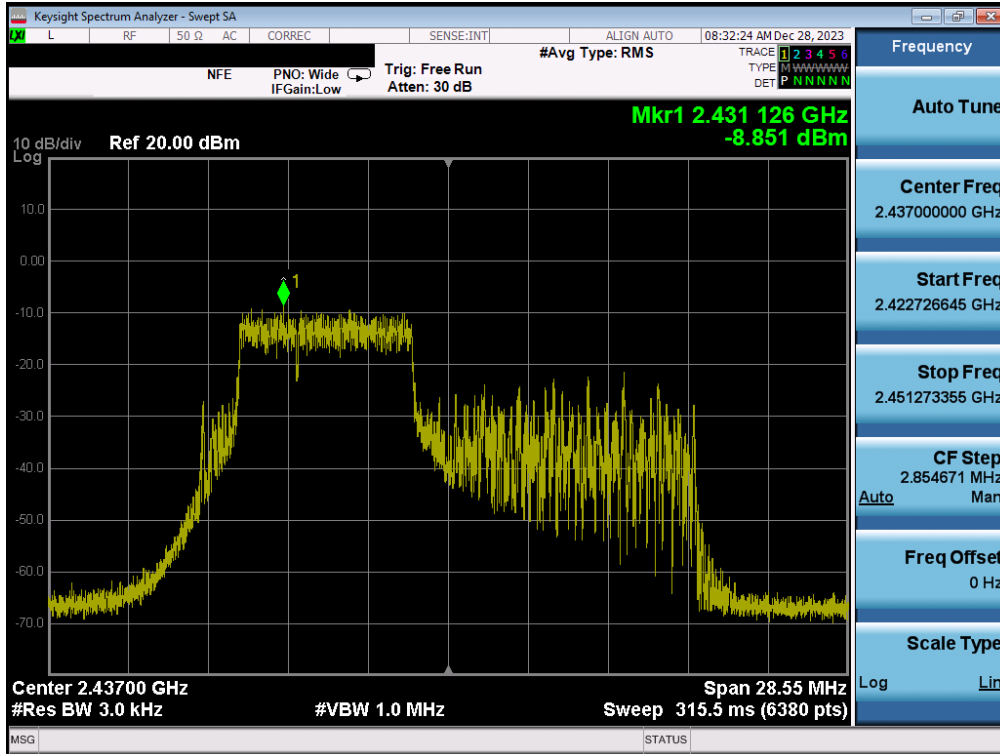


Plot 7-4. Power Spectral Density Plot SISO ANT2 (802.11ax OFDMA – 52+26 Tones – RU Index 70 – Ch. 6)

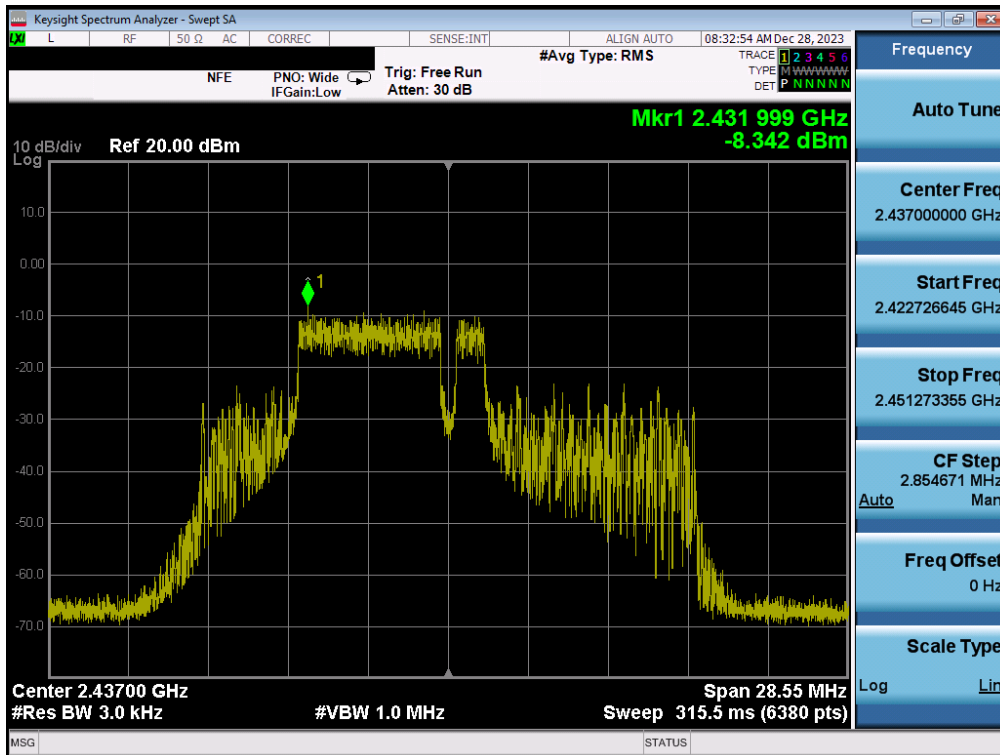


Plot 7-5. Power Spectral Density Plot SISO ANT2 (802.11ax OFDMA – 52+26 Tones – RU Index 71 – Ch. 6)

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Technical Manager
Test Report S/N: 1M2312180128-03.A3L	Test Dates: 12/15/2023 – 1/11/2024	EUT Type: Portable Tablet	Page 19 of 54

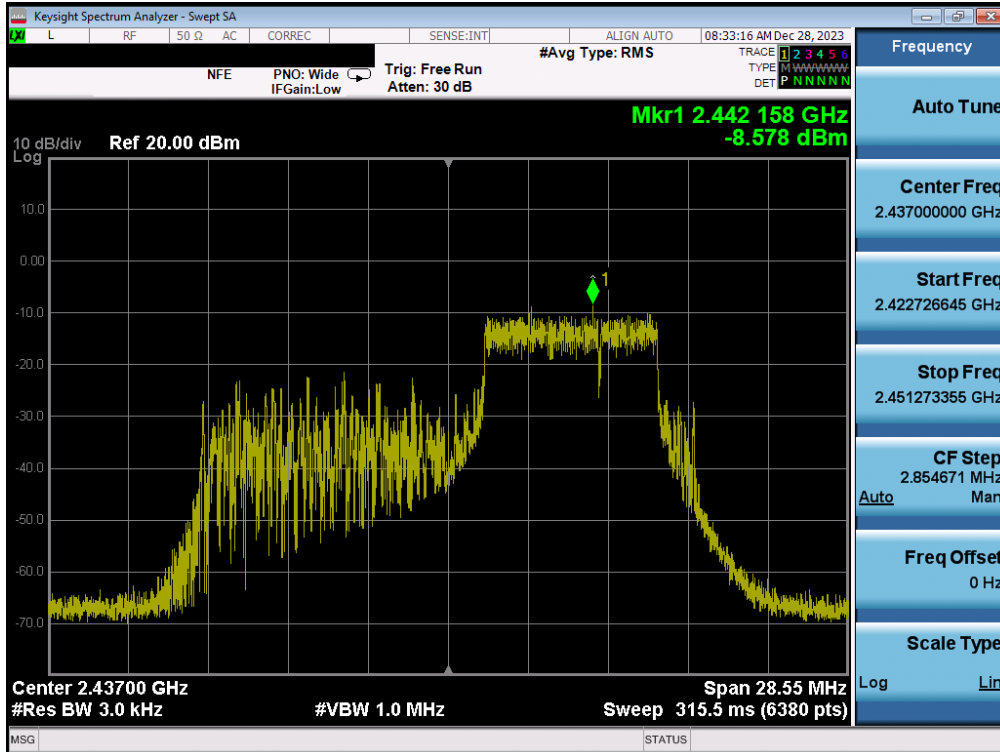


Plot 7-6. Power Spectral Density Plot SISO ANT2 (802.11ax OFDMA – 52+26 Tones – RU Index 72 – Ch. 6)

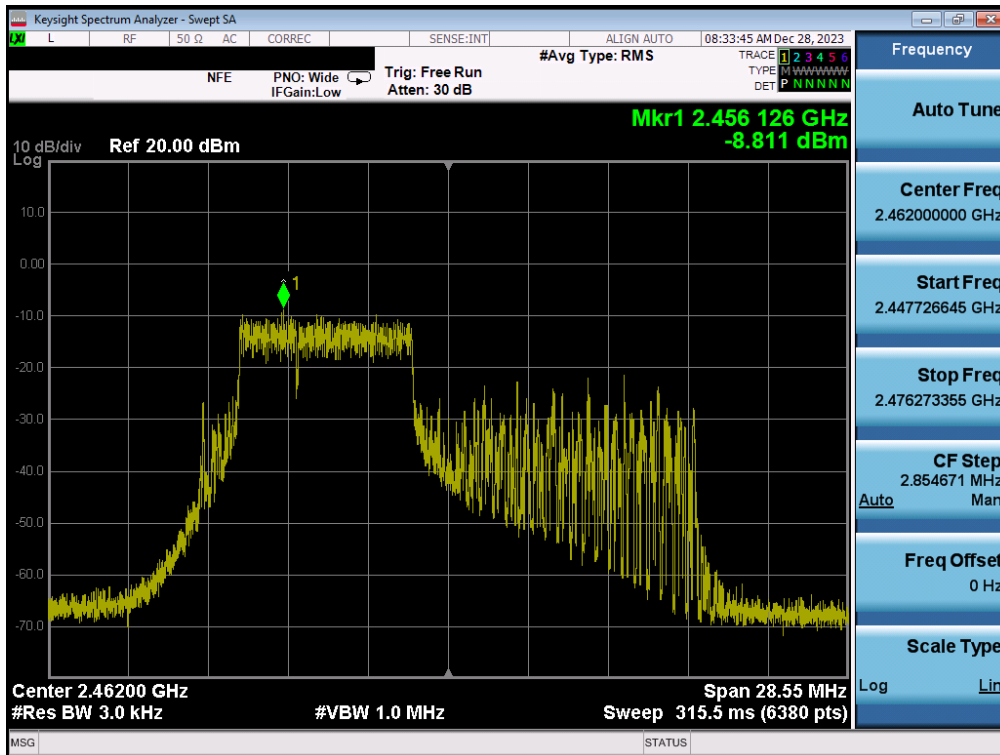


Plot 7-7. Power Spectral Density Plot SISO ANT2 (802.11ax OFDMA – 52+26 Tones – RU Index 70 – Ch. 11)

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Technical Manager
Test Report S/N: 1M2312180128-03.A3L	Test Dates: 12/15/2023 – 1/11/2024	EUT Type: Portable Tablet	Page 20 of 54

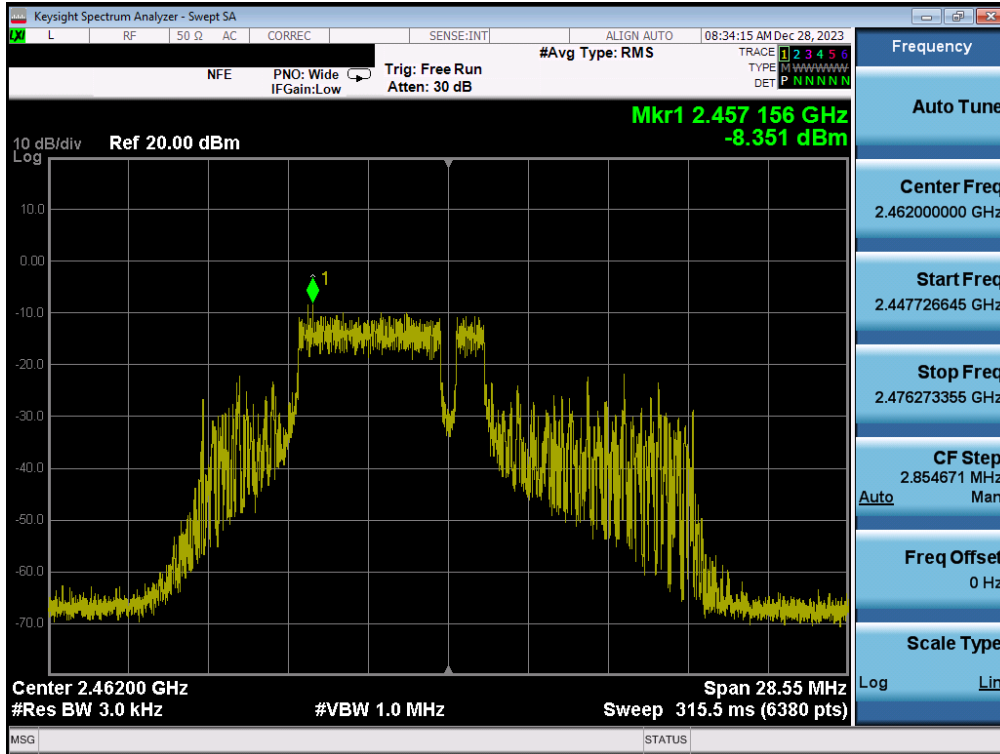


Plot 7-8. Power Spectral Density Plot SISO ANT2 (802.11ax OFDMA – 52+26 Tones – RU Index 71 – Ch. 11)

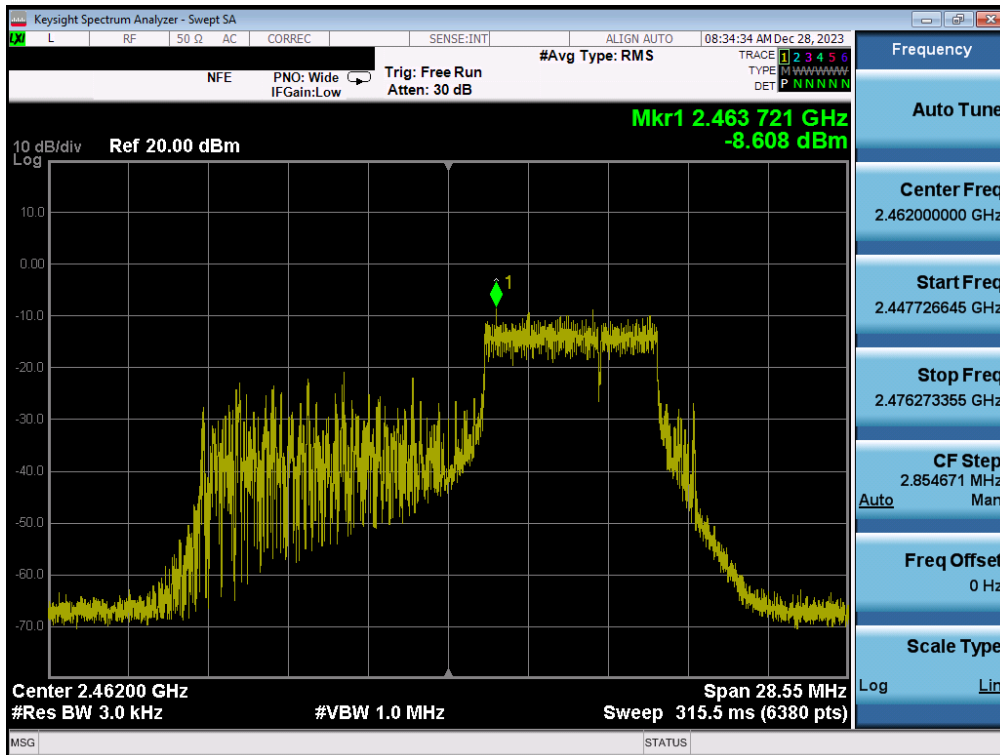


Plot 7-9. Power Spectral Density Plot SISO ANT2 (802.11ax OFDMA – 52+26 Tones – RU Index 72 – Ch. 11)

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Technical Manager
Test Report S/N: 1M2312180128-03.A3L	Test Dates: 12/15/2023 – 1/11/2024	EUT Type: Portable Tablet	Page 21 of 54

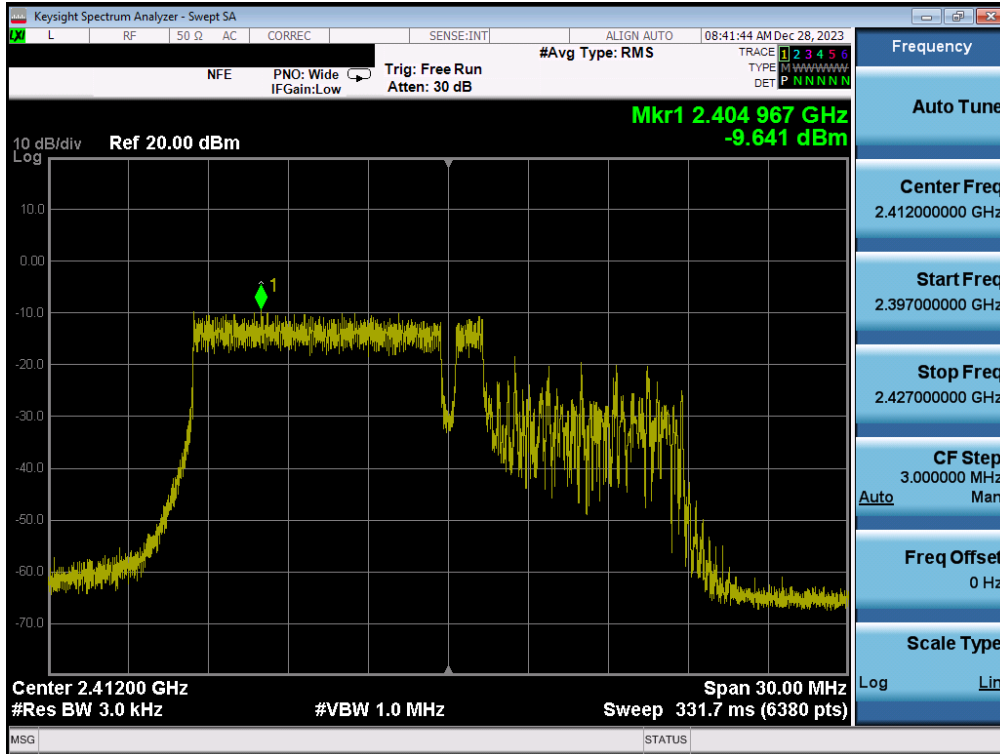


Plot 7-10. Power Spectral Density Plot SISO ANT2 (802.11ax OFDMA – 106+26 Tones – RU Index 82 – Ch. 1)

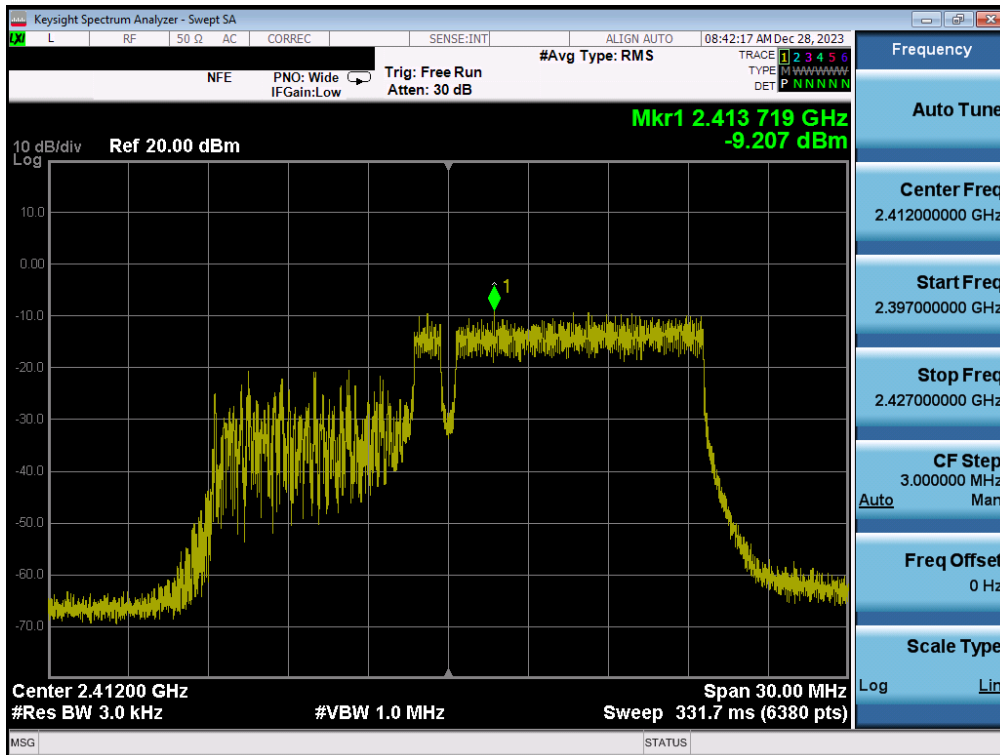


Plot 7-11. Power Spectral Density Plot SISO ANT2 (802.11ax OFDMA – 106+26 Tones – RU Index 83 – Ch. 1)

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Technical Manager
Test Report S/N: 1M2312180128-03.A3L	Test Dates: 12/15/2023 – 1/11/2024	EUT Type: Portable Tablet	Page 22 of 54

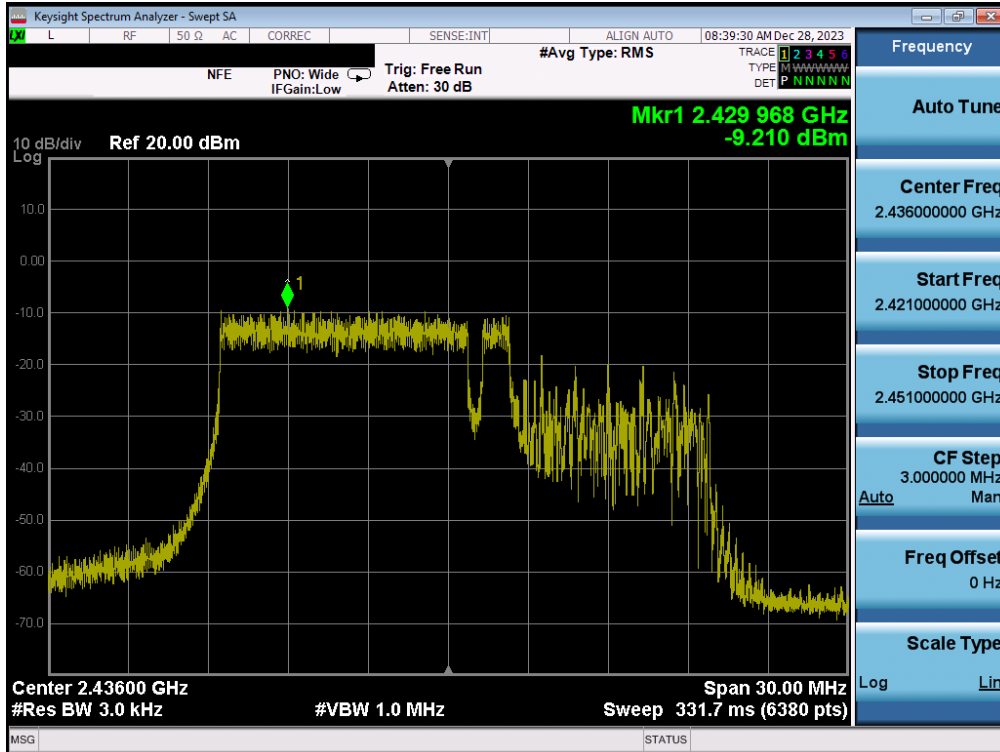


Plot 7-12. Power Spectral Density Plot SISO ANT2 (802.11ax OFDMA – 106+26 Tones – RU Index 82 – Ch. 6)

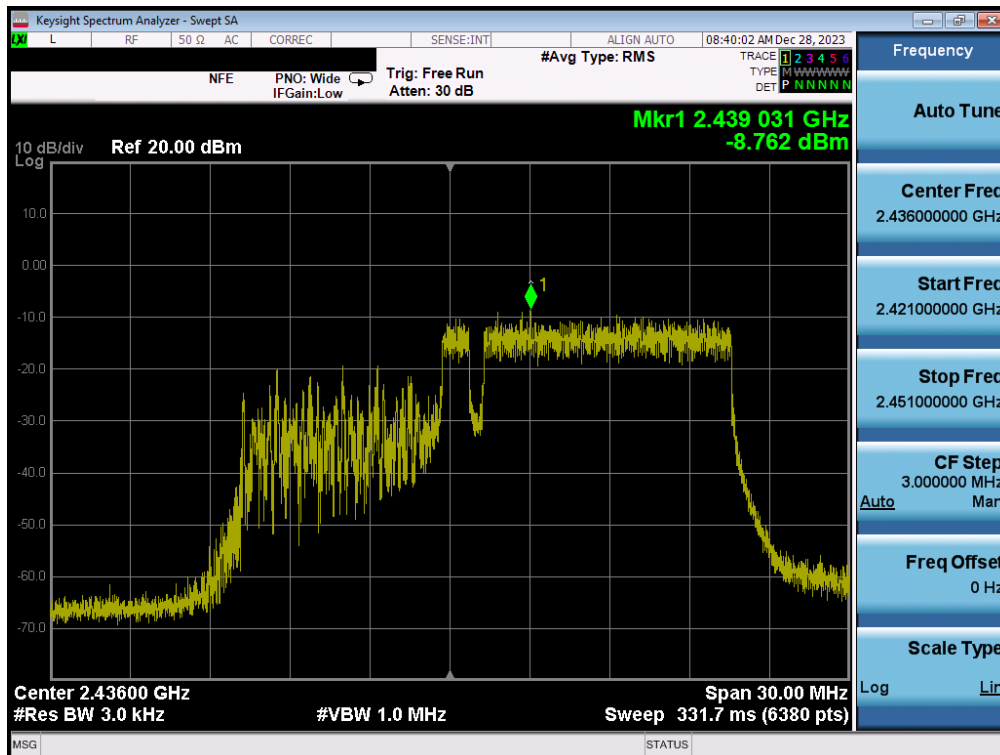


Plot 7-13. Power Spectral Density Plot SISO ANT2 (802.11ax OFDMA – 106+26 Tones – RU Index 83 – Ch. 6)

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Technical Manager
Test Report S/N: 1M2312180128-03.A3L	Test Dates: 12/15/2023 – 1/11/2024	EUT Type: Portable Tablet	Page 23 of 54

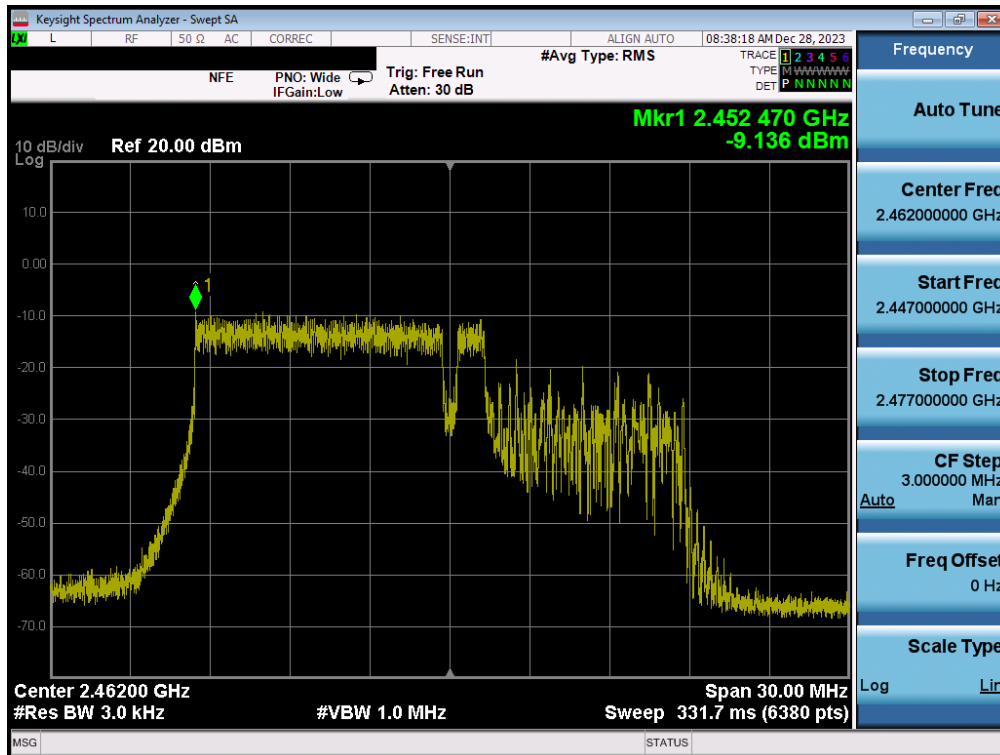

Plot 7-14. Power Spectral Density Plot SISO ANT2 (802.11ax OFDMA – 106+26 Tones – RU Index 82 – Ch. 11)

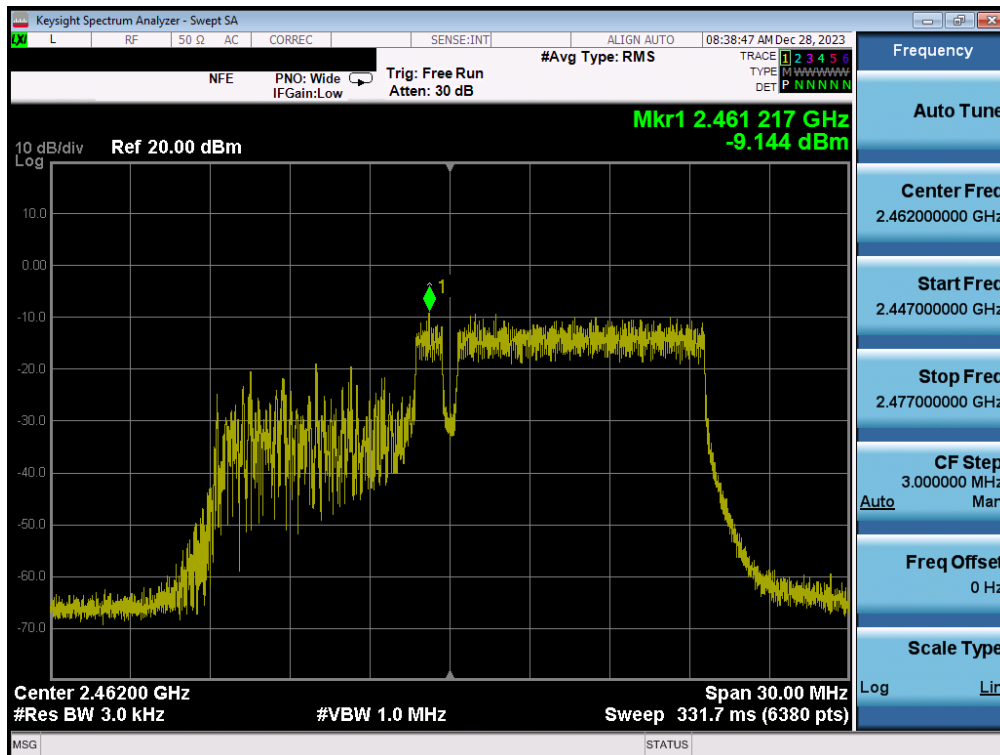


Plot 7-15. Power Spectral Density Plot SISO ANT2 (802.11ax OFDMA – 106+26 Tones – RU Index 83 – Ch. 11)

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Technical Manager
Test Report S/N: 1M2312180128-03.A3L	Test Dates: 12/15/2023 – 1/11/2024	EUT Type: Portable Tablet	Page 24 of 54

7.3.2 MIMO Power Spectral Density Measurements


Frequency [MHz]	Channel No.	802.11 Mode	Tones	Data Rate [Mbps]	RU Index	ANT 1 Power Spectral Density [dBm]	ANT 2 Power Spectral Density [dBm]	Summed MIMO Power Spectral Density [dBm]	Maximum Permissible Power Density [dBm / 3kHz]	Margin [dB]	Pass / Fail
2412	1	be	52+26T	MCS0	70	-7.04	-9.14	-4.95	8.00	-12.95	Pass
2412	1	be	52+26T	MCS0	71	-7.70	-7.57	-4.62	8.00	-12.62	Pass
2412	1	be	52+26T	MCS0	72	-8.32	-9.11	-5.68	8.00	-13.68	Pass
2437	6	be	52+26T	MCS0	70	-7.68	-8.15	-4.90	8.00	-12.90	Pass
2437	6	be	52+26T	MCS0	71	-7.48	-7.37	-4.41	8.00	-12.41	Pass
2437	6	be	52+26T	MCS0	72	-8.51	-8.27	-5.38	8.00	-13.38	Pass
2462	11	be	52+26T	MCS0	70	-7.40	-8.02	-4.69	8.00	-12.69	Pass
2462	11	be	52+26T	MCS0	71	-7.99	-8.10	-5.03	8.00	-13.03	Pass
2462	11	be	52+26T	MCS0	72	-8.46	-7.83	-5.13	8.00	-13.13	Pass
2412	1	be	106+26T	MCS0	82	-8.14	-7.62	-4.86	8.00	-12.86	Pass
2412	1	be	106+26T	MCS0	83	-7.87	-8.19	-5.02	8.00	-13.02	Pass
2437	6	be	106+26T	MCS0	82	-8.36	-7.41	-4.85	8.00	-12.85	Pass
2437	6	be	106+26T	MCS0	83	-8.34	-7.66	-4.98	8.00	-12.98	Pass
2462	11	be	106+26T	MCS0	82	-8.65	-7.77	-5.18	8.00	-13.18	Pass
2462	11	be	106+26T	MCS0	83	-7.87	-8.13	-4.99	8.00	-12.99	Pass

Table 7-7. Conducted Power Spectral Density Measurements MIMO

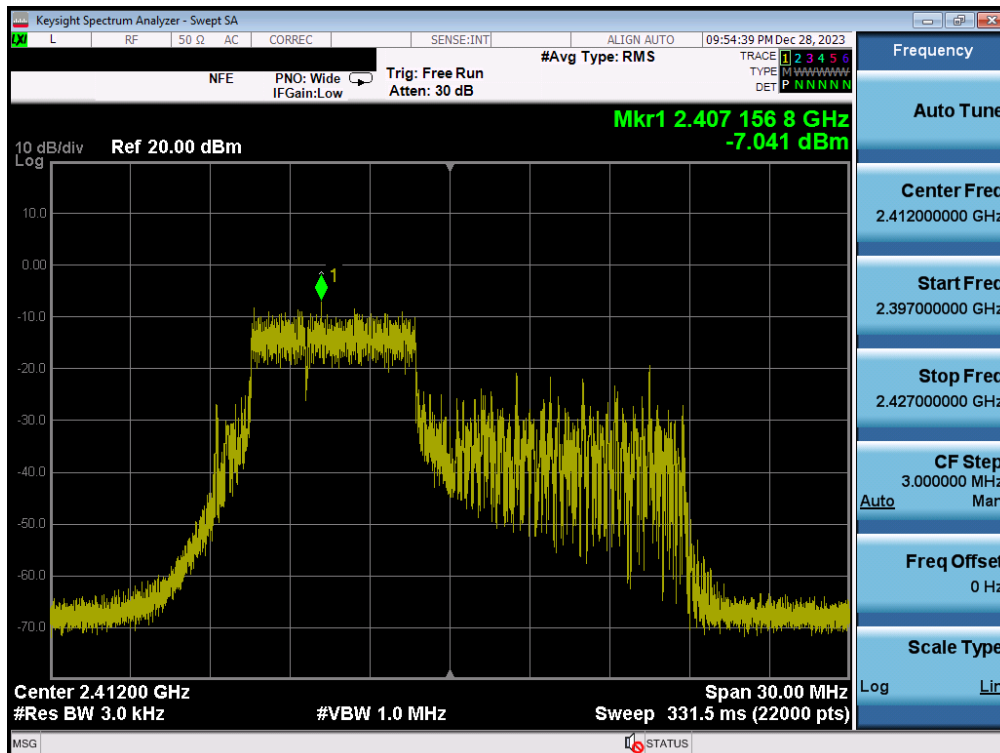


Plot 7-16. Power Spectral Density Plot MIMO ANT1 (802.11ax OFDMA – 52+26 Tones – RU Index 70 – Ch. 1)

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Technical Manager
Test Report S/N: 1M2312180128-03.A3L	Test Dates: 12/15/2023 – 1/11/2024	EUT Type: Portable Tablet	Page 25 of 54

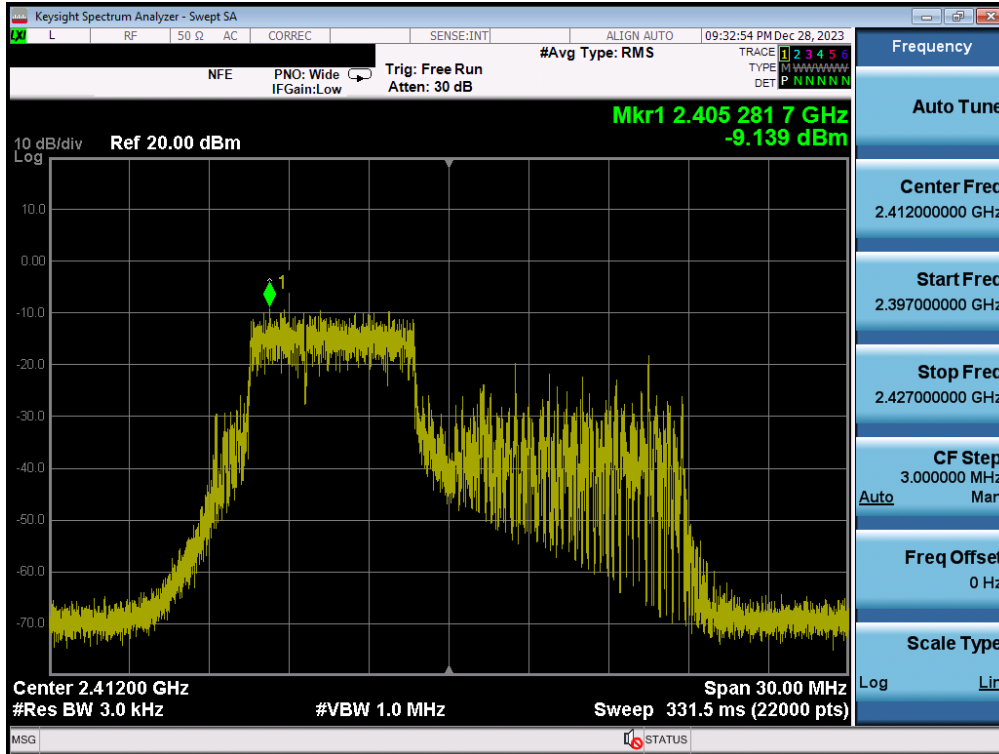


Plot 7-17. Power Spectral Density Plot MIMO ANT2 (802.11ax OFDMA – 52+26 Tones – RU Index 70 – Ch. 1)

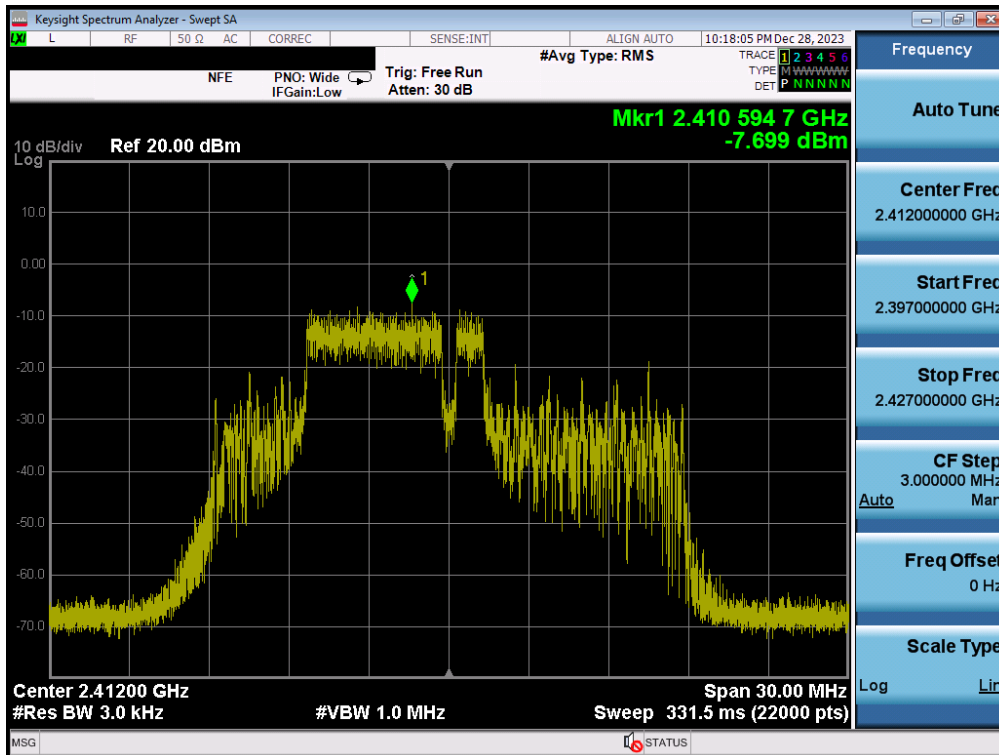


Plot 7-18. Power Spectral Density Plot MIMO ANT1 (802.11ax OFDMA – 52+26 Tones – RU Index 71 – Ch. 1)

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Technical Manager
Test Report S/N: 1M2312180128-03.A3L	Test Dates: 12/15/2023 – 1/11/2024	EUT Type: Portable Tablet	Page 26 of 54

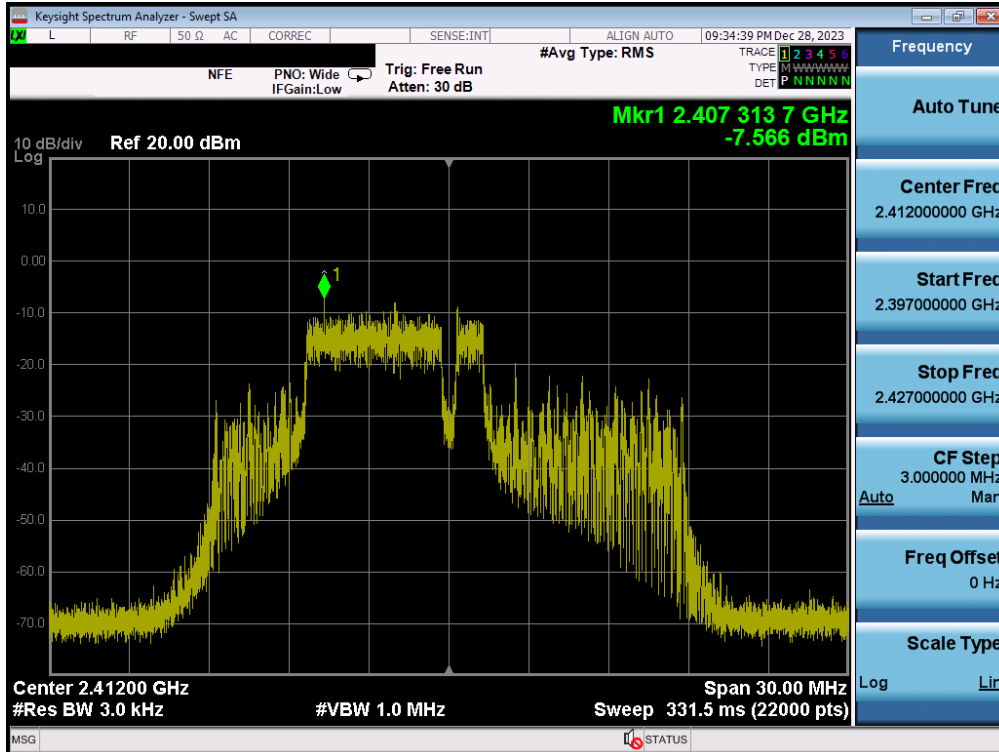


Plot 7-19. Power Spectral Density Plot MIMO ANT2 (802.11ax OFDMA – 52+26 Tones – RU Index 71 – Ch. 1)

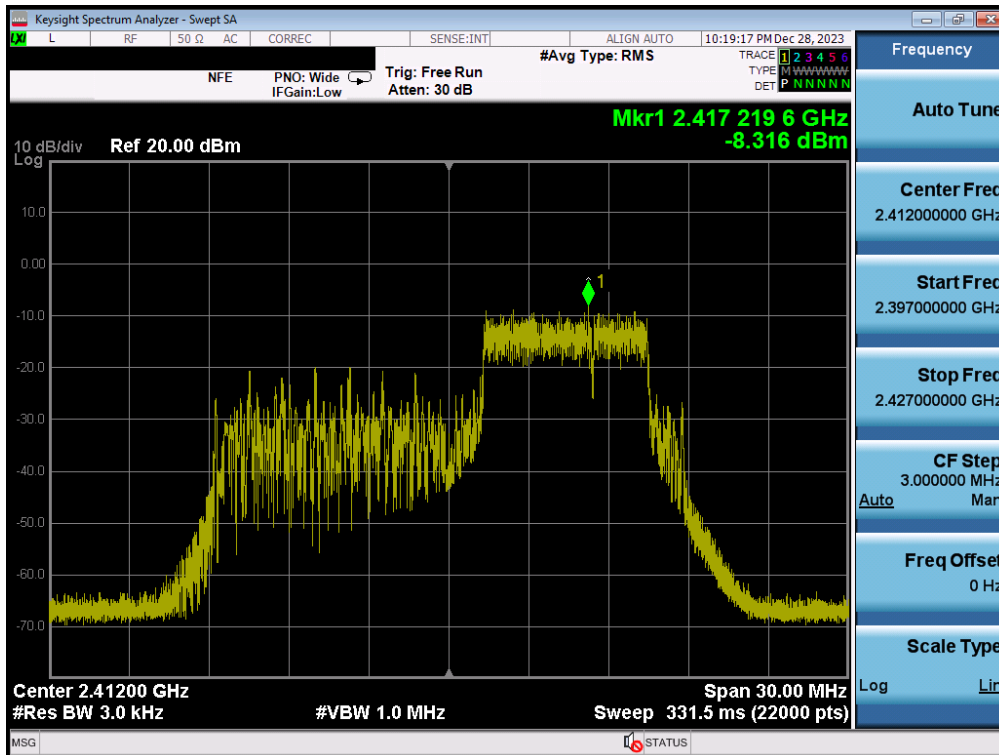


Plot 7-20. Power Spectral Density Plot MIMO ANT1 (802.11ax OFDMA – 52+26 Tones – RU Index 72 – Ch. 1)

FCC ID: A3LSMX910 IC: 649E-SMX910		MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Technical Manager
Test Report S/N: 1M2312180128-03.A3L	Test Dates: 12/15/2023 – 1/11/2024	EUT Type: Portable Tablet		Page 27 of 54

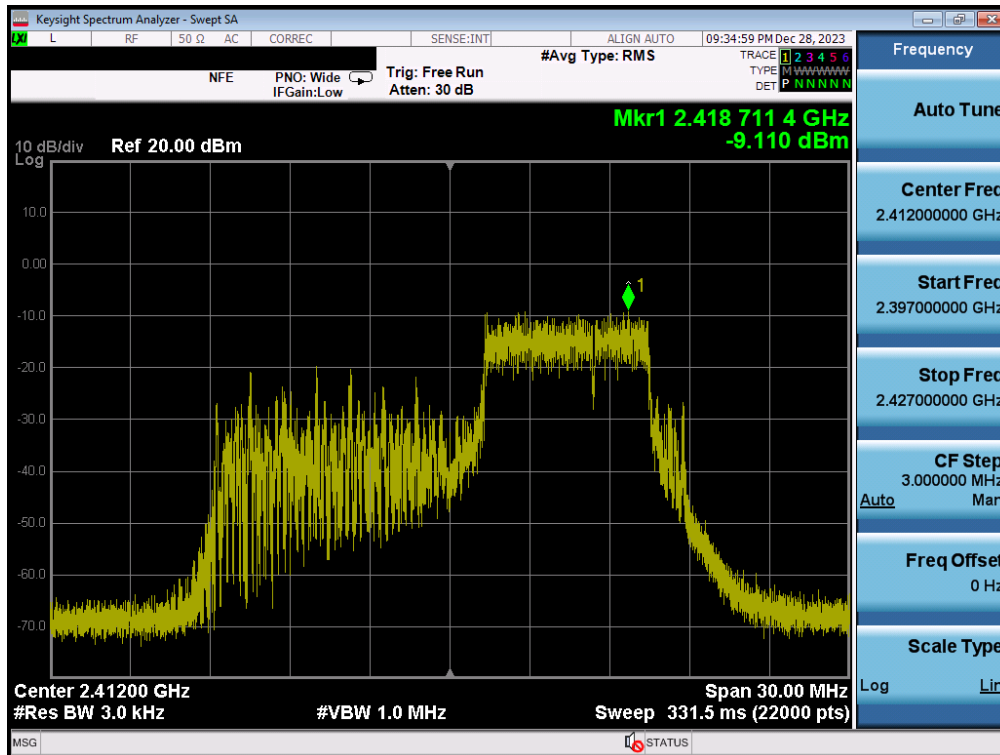


Plot 7-21. Power Spectral Density Plot MIMO ANT2 (802.11ax OFDMA – 52+26 Tones – RU Index 72 – Ch. 1)

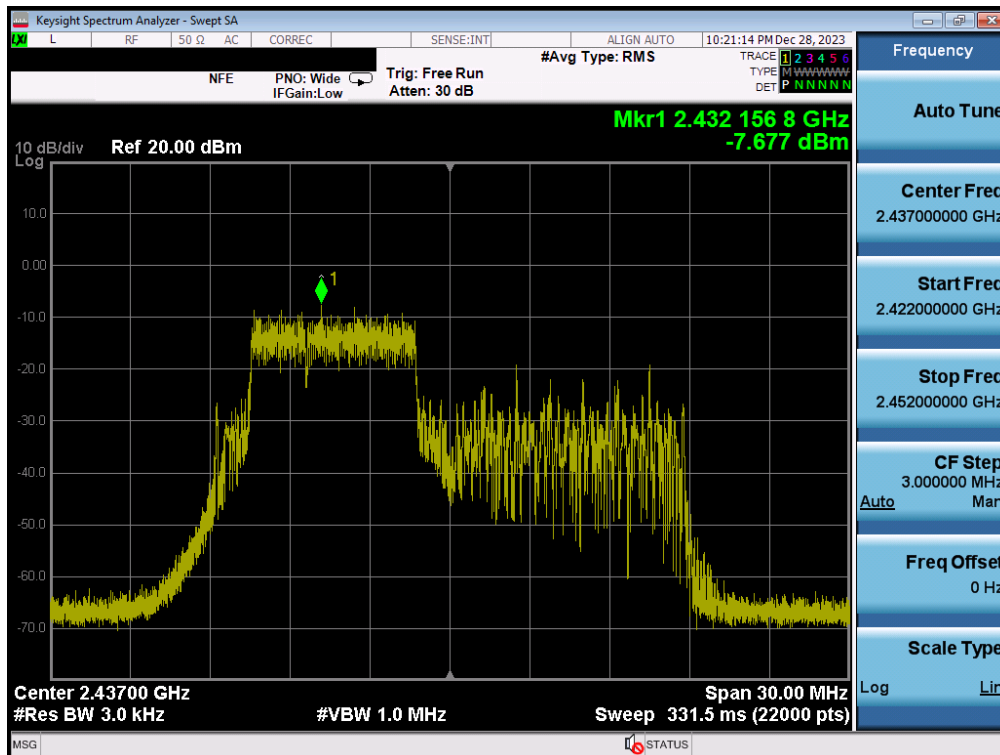


Plot 7-22. Power Spectral Density Plot MIMO ANT1 (802.11ax OFDMA – 52+26 Tones – RU Index 70 – Ch. 6)

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Technical Manager
Test Report S/N: 1M2312180128-03.A3L	Test Dates: 12/15/2023 – 1/11/2024	EUT Type: Portable Tablet	Page 28 of 54

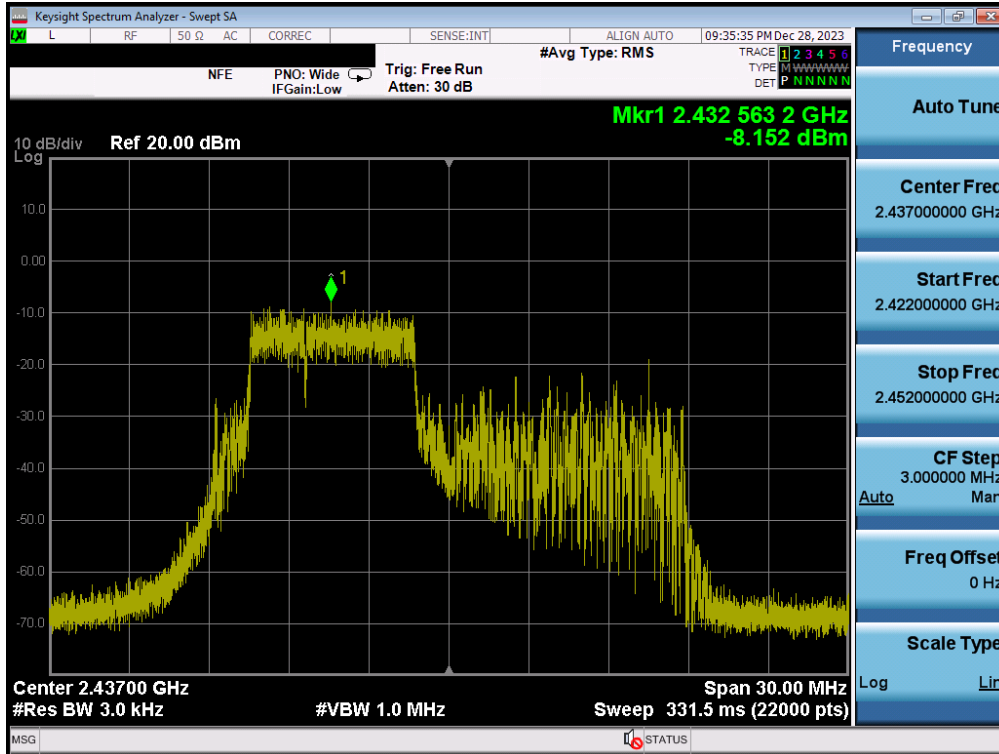


Plot 7-23. Power Spectral Density Plot MIMO ANT2 (802.11ax OFDMA – 52+26 Tones – RU Index 70 – Ch. 6)

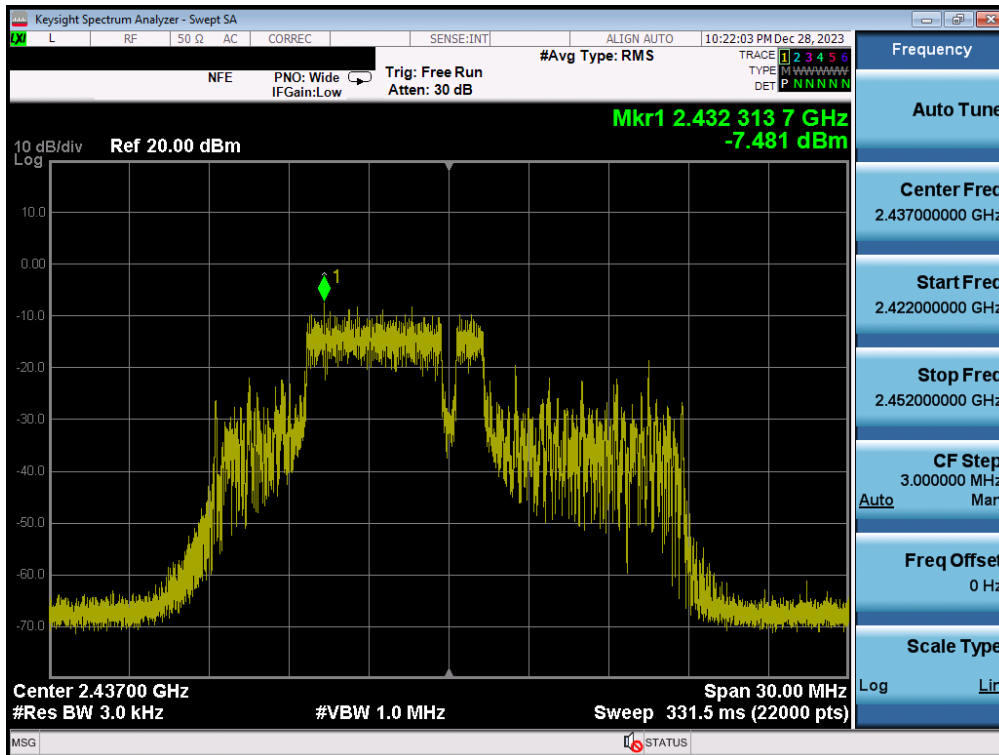


Plot 7-24. Power Spectral Density Plot MIMO ANT1 (802.11ax OFDMA – 52+26 Tones – RU Index 71 – Ch. 6)

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Technical Manager
Test Report S/N: 1M2312180128-03.A3L	Test Dates: 12/15/2023 – 1/11/2024	EUT Type: Portable Tablet	Page 29 of 54

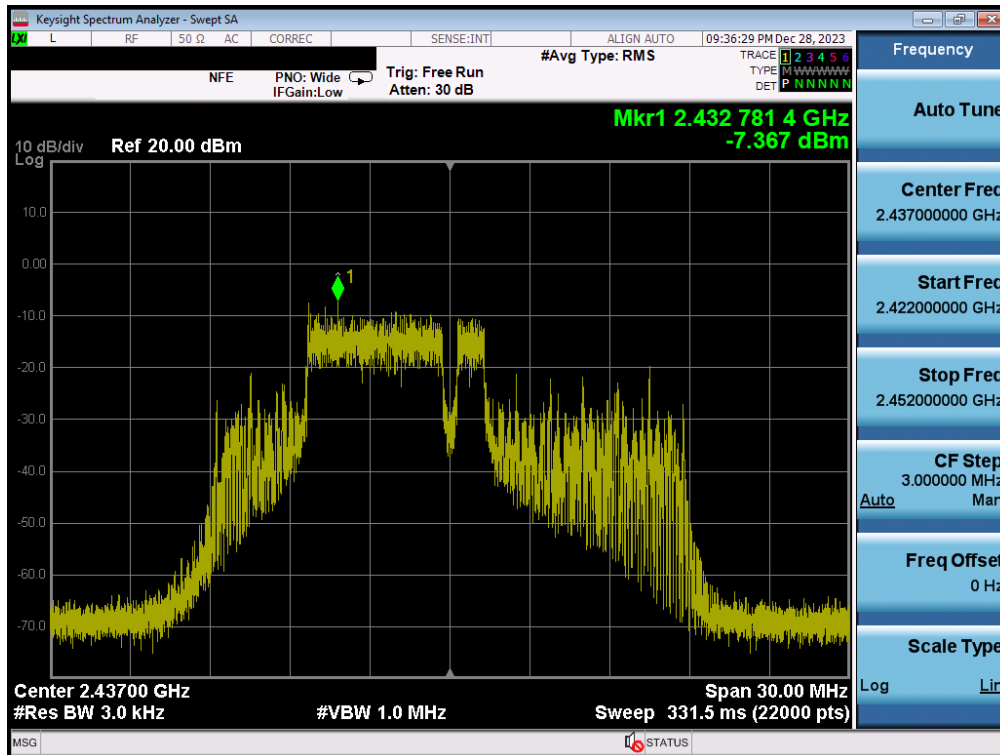


Plot 7-25. Power Spectral Density Plot MIMO ANT2 (802.11ax OFDMA – 52+26 Tones – RU Index 71 – Ch. 6)

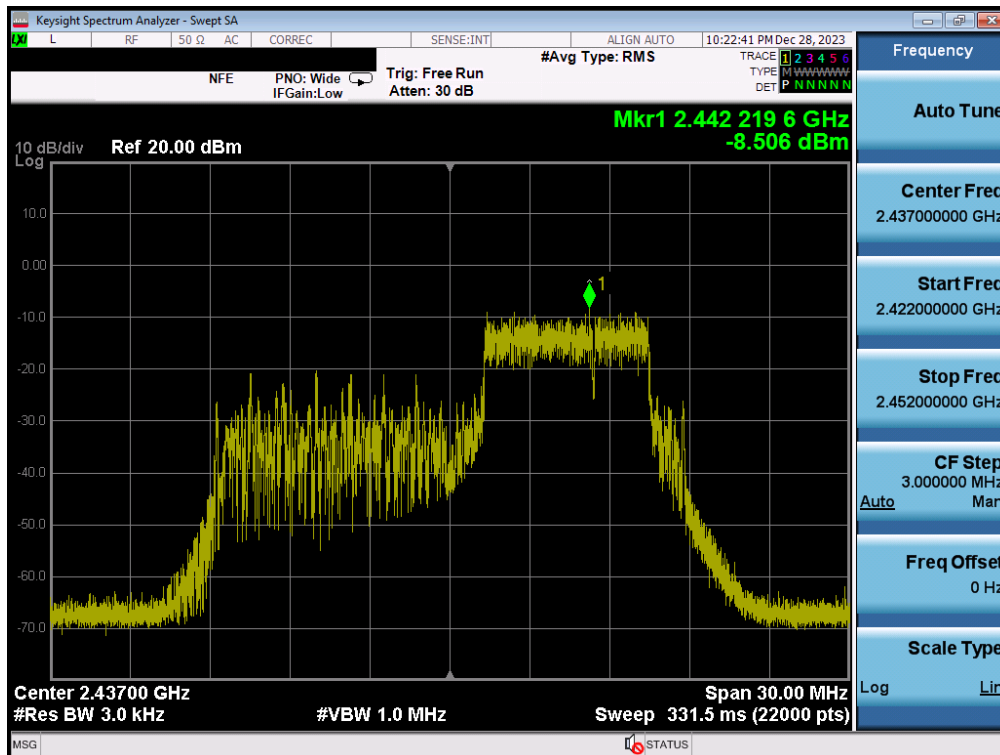


Plot 7-26. Power Spectral Density Plot MIMO ANT1 (802.11ax OFDMA – 52+26 Tones – RU Index 72 – Ch. 6)

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Technical Manager
Test Report S/N: 1M2312180128-03.A3L	Test Dates: 12/15/2023 – 1/11/2024	EUT Type: Portable Tablet	Page 30 of 54

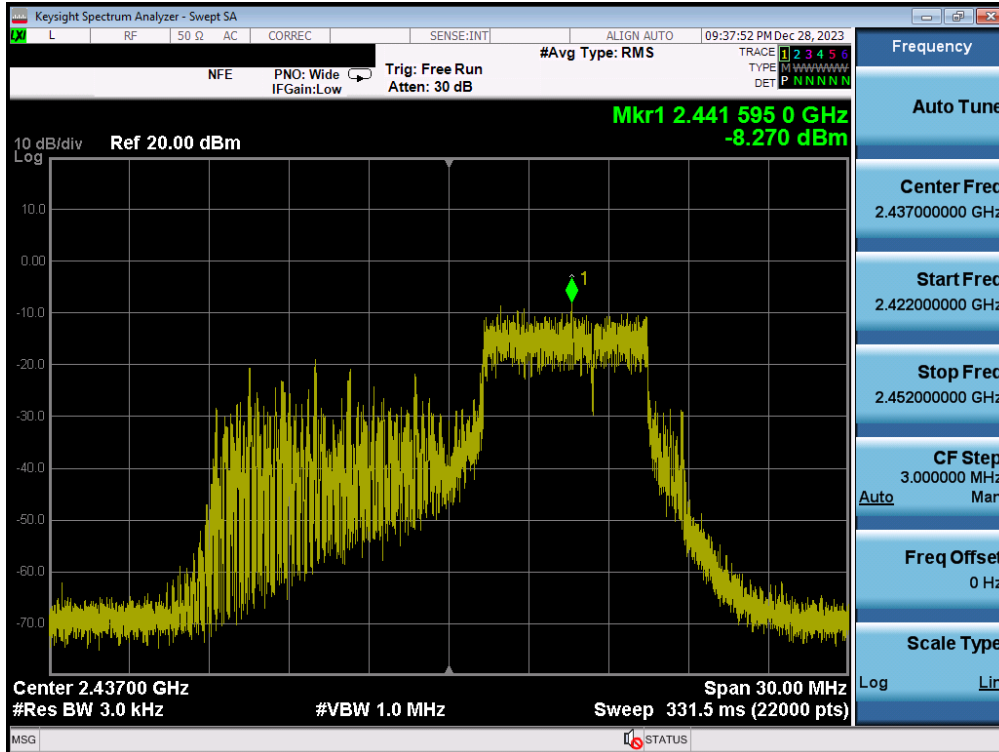


Plot 7-27. Power Spectral Density Plot MIMO ANT2 (802.11ax OFDMA – 52+26 Tones – RU Index 72 – Ch. 6)

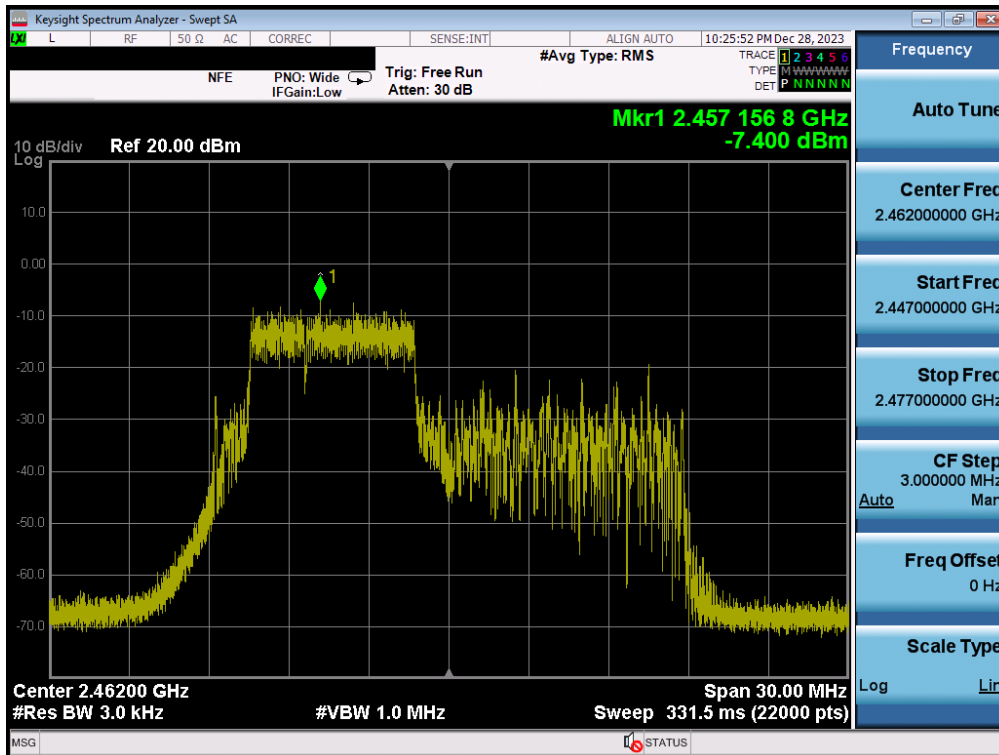


Plot 7-28. Power Spectral Density Plot MIMO ANT1 (802.11ax OFDMA – 52+26 Tones – RU Index 70 – Ch. 11)

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Technical Manager
Test Report S/N: 1M2312180128-03.A3L	Test Dates: 12/15/2023 – 1/11/2024	EUT Type: Portable Tablet	Page 31 of 54

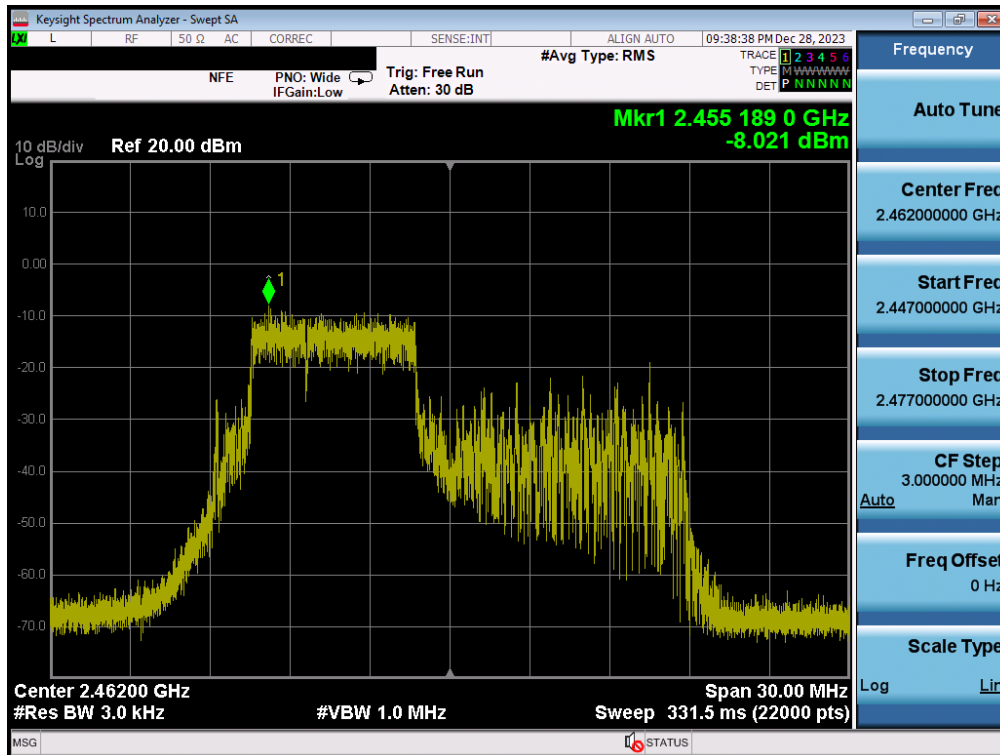


Plot 7-29. Power Spectral Density Plot MIMO ANT2 (802.11ax OFDMA – 52+26 Tones – RU Index 70 – Ch. 11)

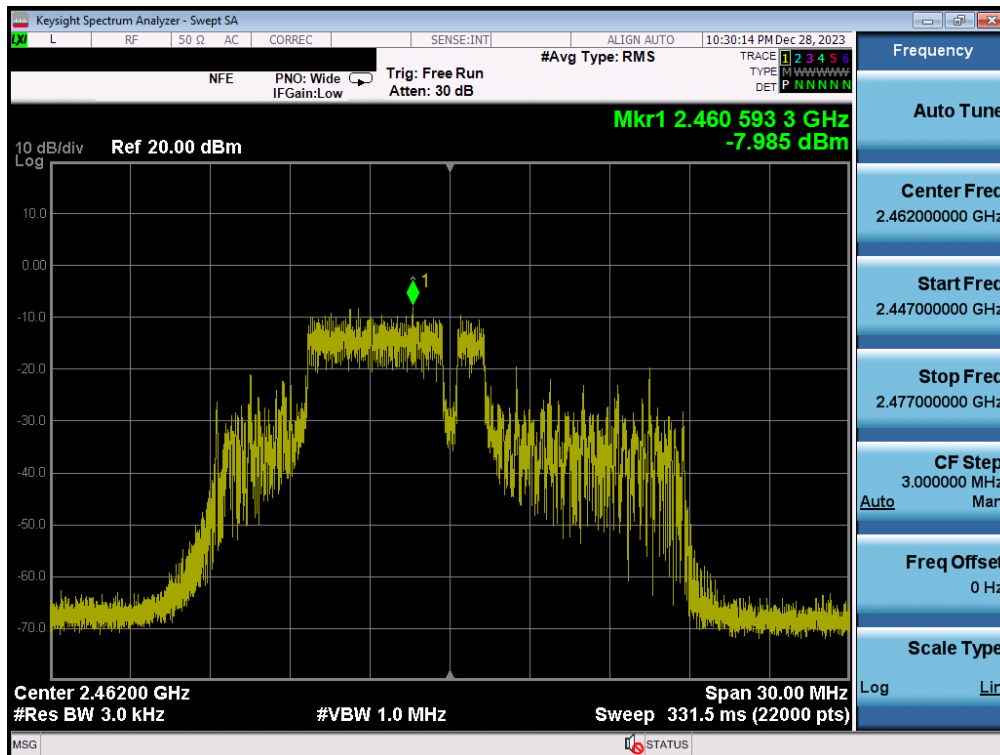


Plot 7-30. Power Spectral Density Plot MIMO ANT1 (802.11ax OFDMA – 52+26 Tones – RU Index 71 – Ch. 11)

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Technical Manager
Test Report S/N: 1M2312180128-03.A3L	Test Dates: 12/15/2023 – 1/11/2024	EUT Type: Portable Tablet	Page 32 of 54

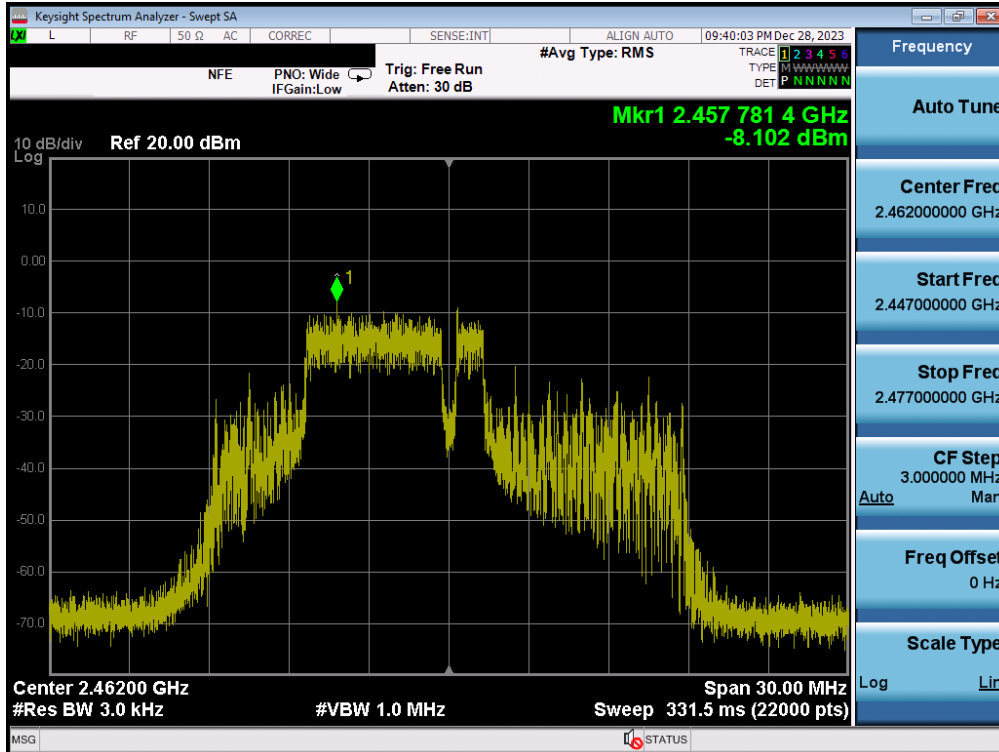


Plot 7-31. Power Spectral Density Plot MIMO ANT2 (802.11ax OFDMA – 52+26 Tones – RU Index 71 – Ch. 11)

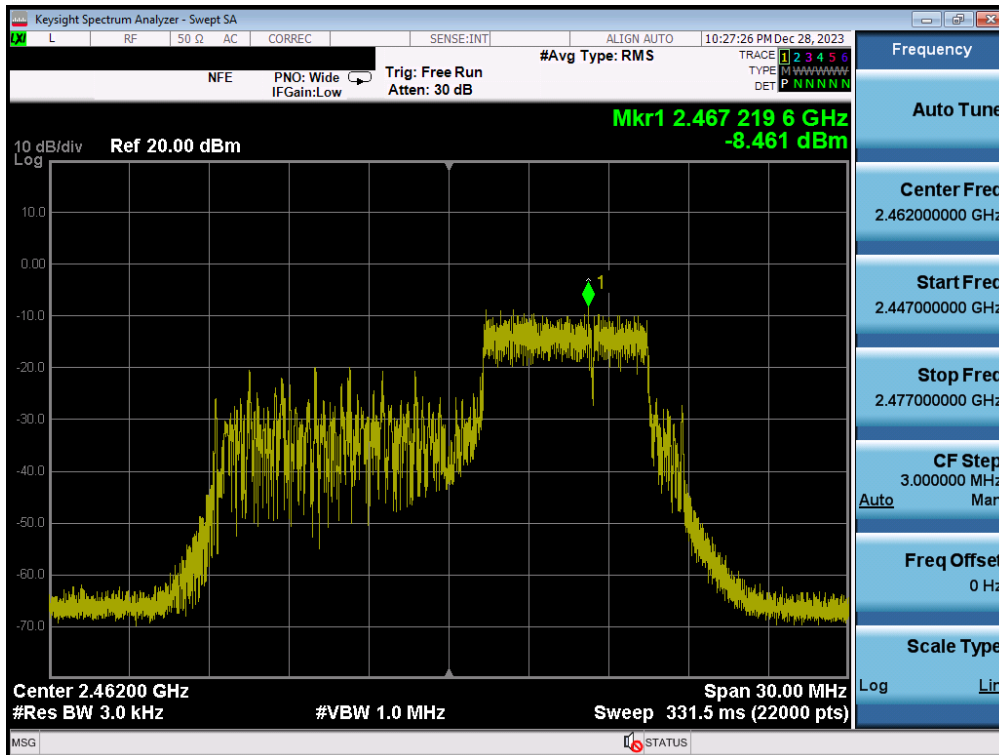


Plot 7-32. Power Spectral Density Plot MIMO ANT1 (802.11ax OFDMA – 52+26 Tones – RU Index 72 – Ch. 11)

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Technical Manager
Test Report S/N: 1M2312180128-03.A3L	Test Dates: 12/15/2023 – 1/11/2024	EUT Type: Portable Tablet	Page 33 of 54

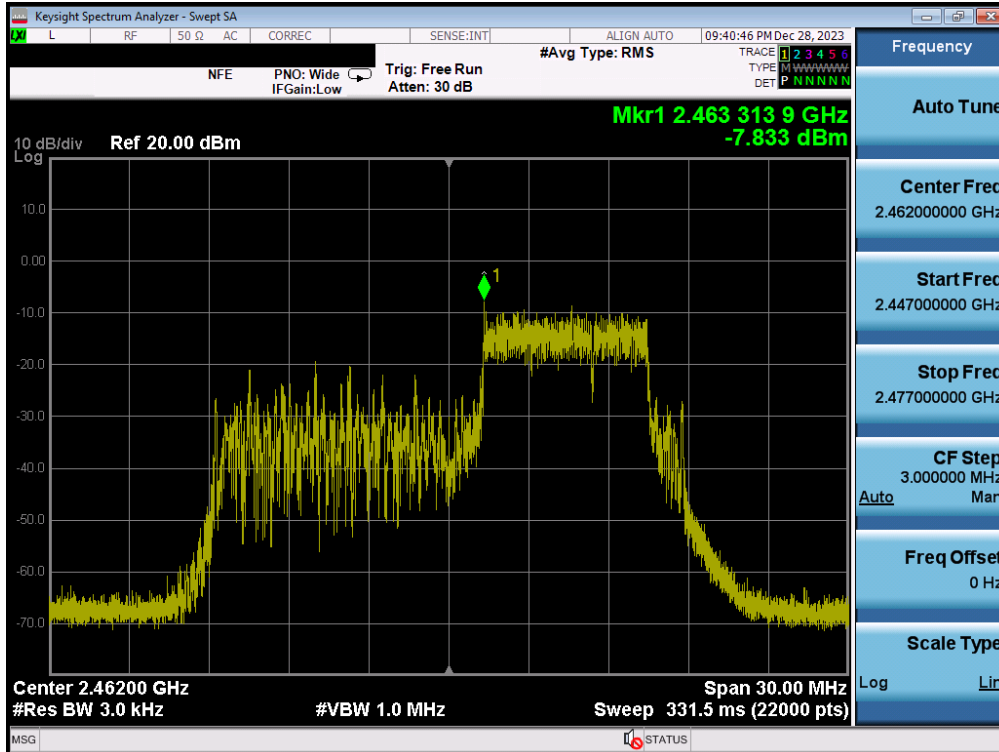


Plot 7-33. Power Spectral Density Plot MIMO ANT2 (802.11ax OFDMA – 52+26 Tones – RU Index 72 – Ch. 11)

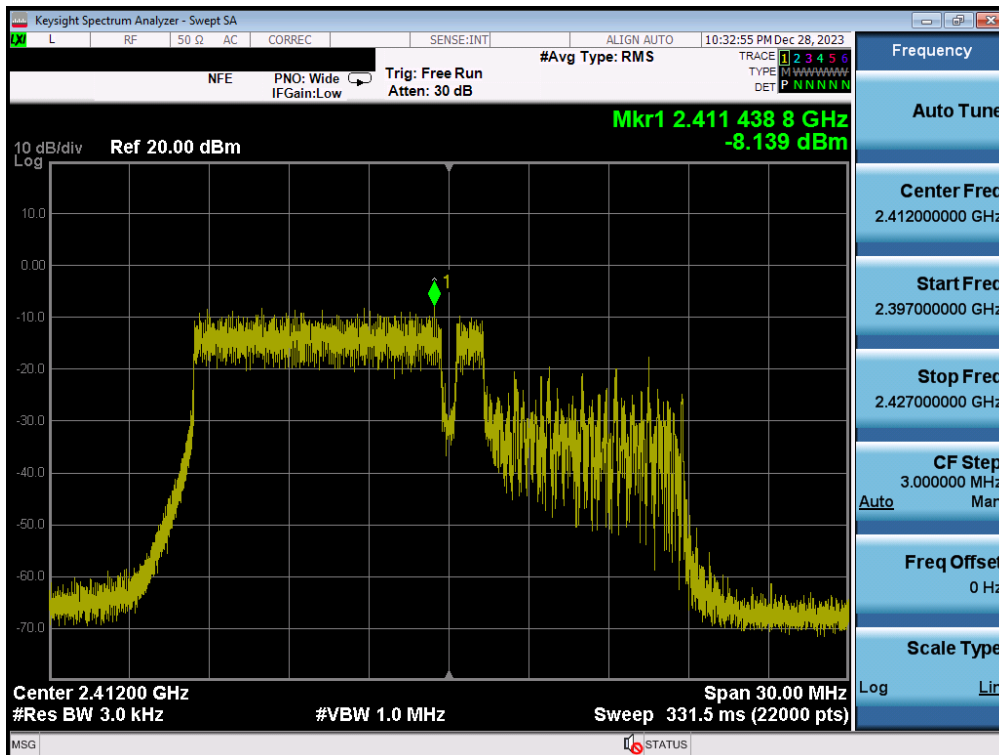


Plot 7-34. Power Spectral Density Plot MIMO ANT1 (802.11ax OFDMA – 106+26 Tones – RU Index 82 – Ch. 1)

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Technical Manager
Test Report S/N: 1M2312180128-03.A3L	Test Dates: 12/15/2023 – 1/11/2024	EUT Type: Portable Tablet	Page 34 of 54

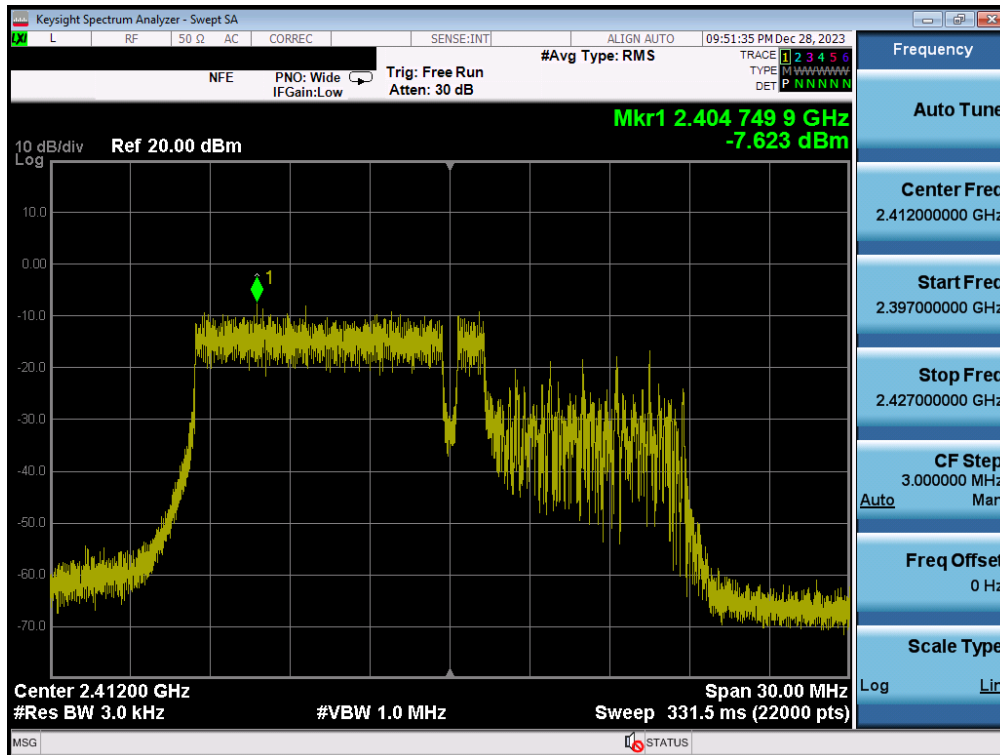


Plot 7-35. Power Spectral Density Plot MIMO ANT2 (802.11ax OFDMA – 106+26 Tones – RU Index 82 – Ch. 1)

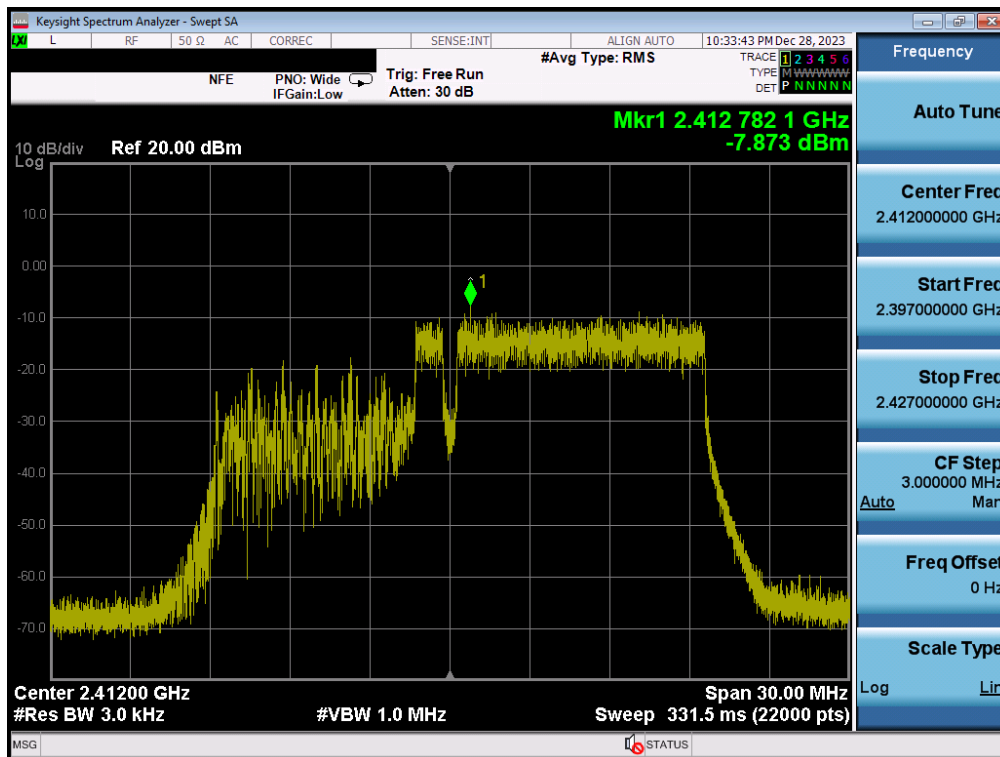


Plot 7-36. Power Spectral Density Plot MIMO ANT1 (802.11ax OFDMA – 106+26 Tones – RU Index 83 – Ch. 1)

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Technical Manager
Test Report S/N: 1M2312180128-03.A3L	Test Dates: 12/15/2023 – 1/11/2024	EUT Type: Portable Tablet	Page 35 of 54

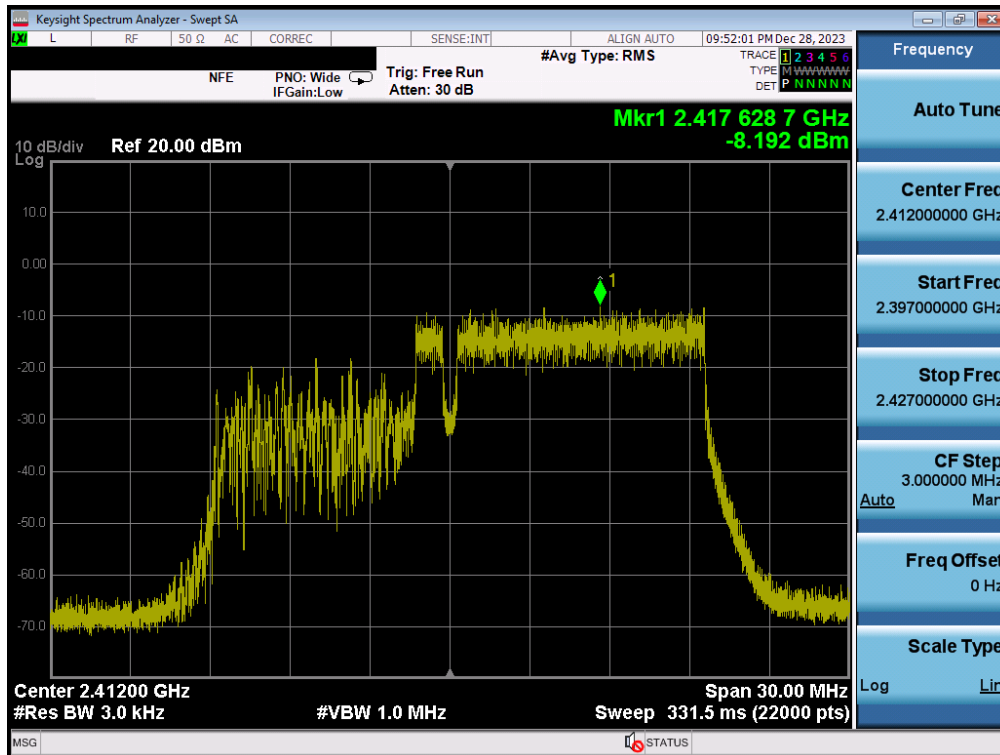


Plot 7-37. Power Spectral Density Plot MIMO ANT2 (802.11ax OFDMA – 106+26 Tones – RU Index 83 – Ch. 1)

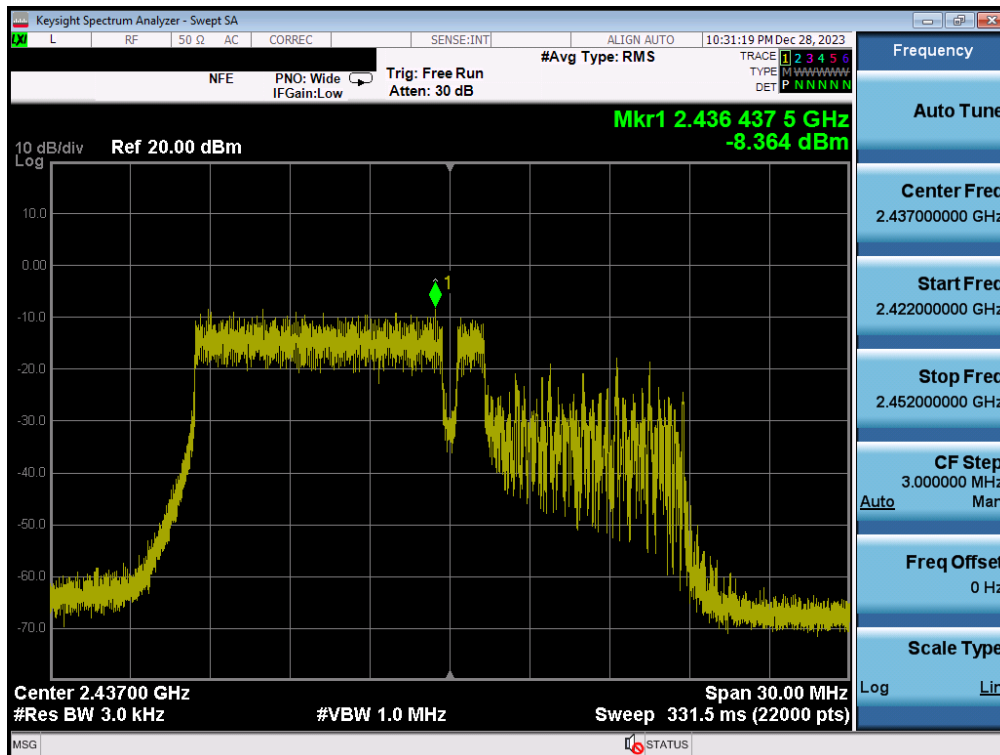


Plot 7-38. Power Spectral Density Plot MIMO ANT1 (802.11ax OFDMA – 106+26 Tones – RU Index 82 – Ch. 6)

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Technical Manager
Test Report S/N: 1M2312180128-03.A3L	Test Dates: 12/15/2023 – 1/11/2024	EUT Type: Portable Tablet	Page 36 of 54

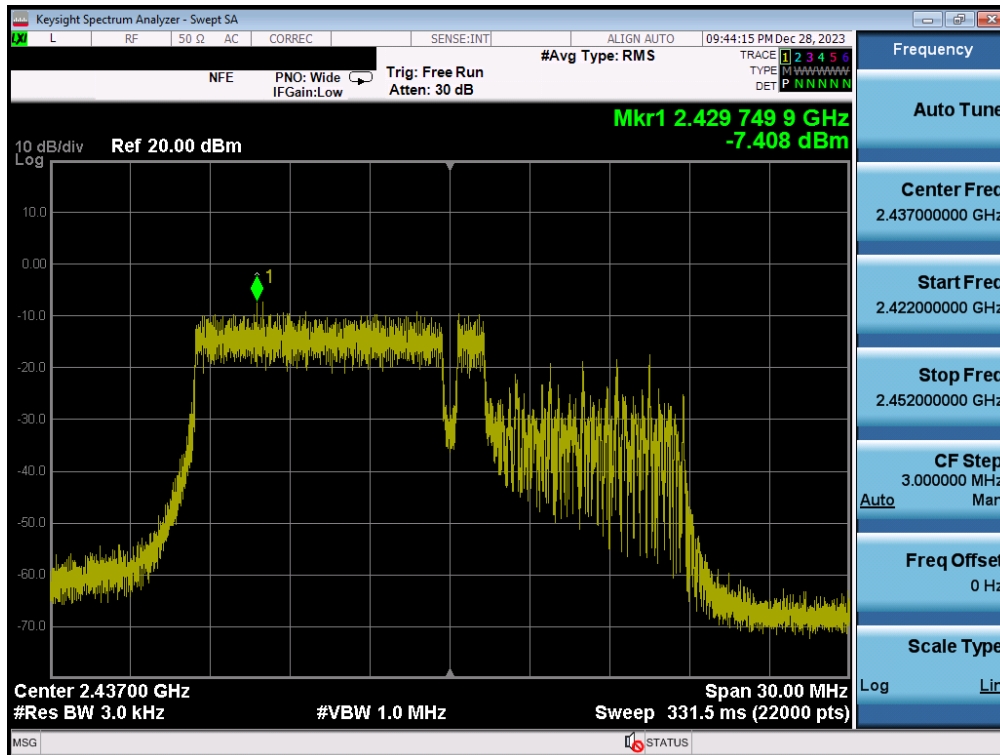


Plot 7-39. Power Spectral Density Plot MIMO ANT2 (802.11ax OFDMA – 106+26 Tones – RU Index 82 – Ch. 6)

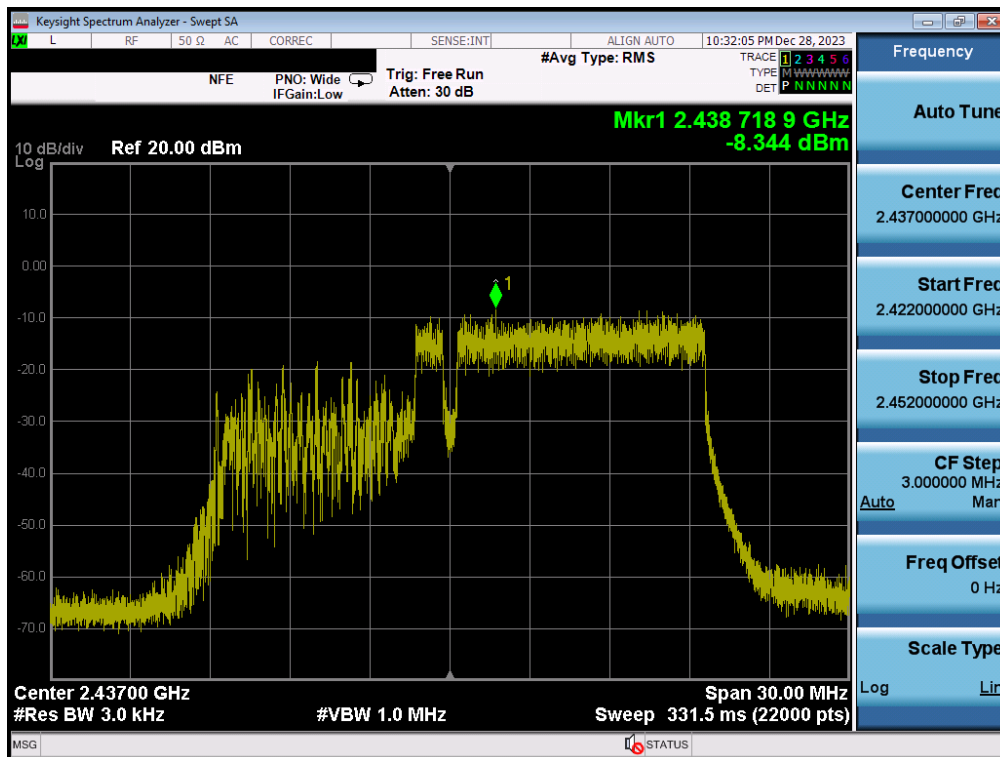


Plot 7-40. Power Spectral Density Plot MIMO ANT1 (802.11ax OFDMA – 106+26 Tones – RU Index 83 – Ch. 6)

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Technical Manager
Test Report S/N: 1M2312180128-03.A3L	Test Dates: 12/15/2023 – 1/11/2024	EUT Type: Portable Tablet	Page 37 of 54

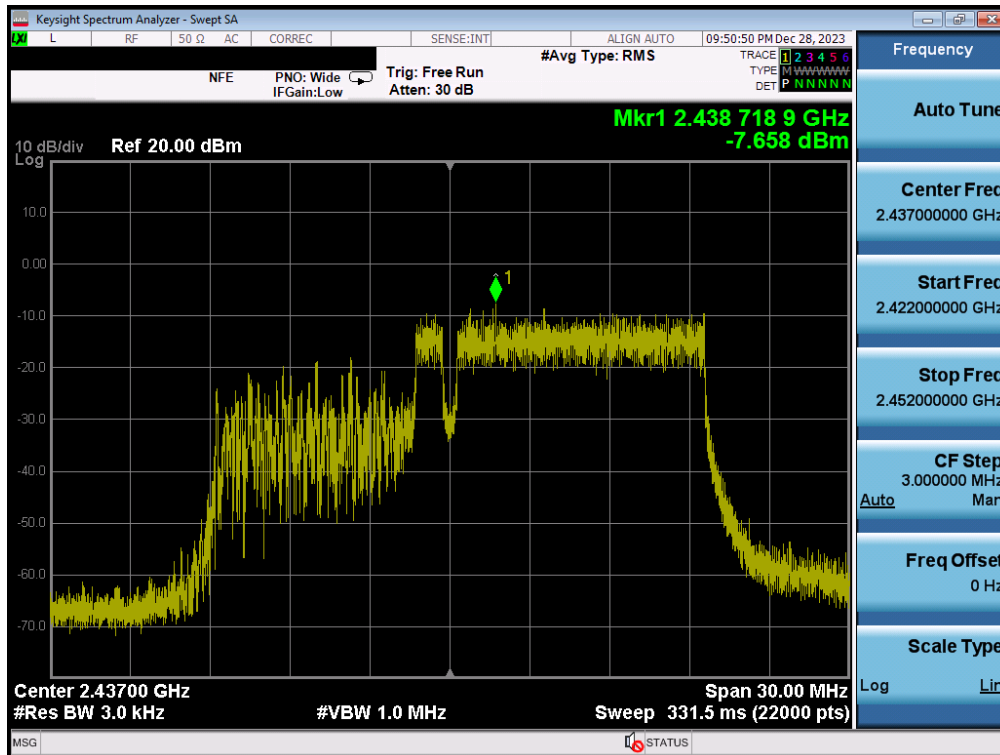


Plot 7-41. Power Spectral Density Plot MIMO ANT2 (802.11ax OFDMA – 106+26 Tones – RU Index 83 – Ch. 6)

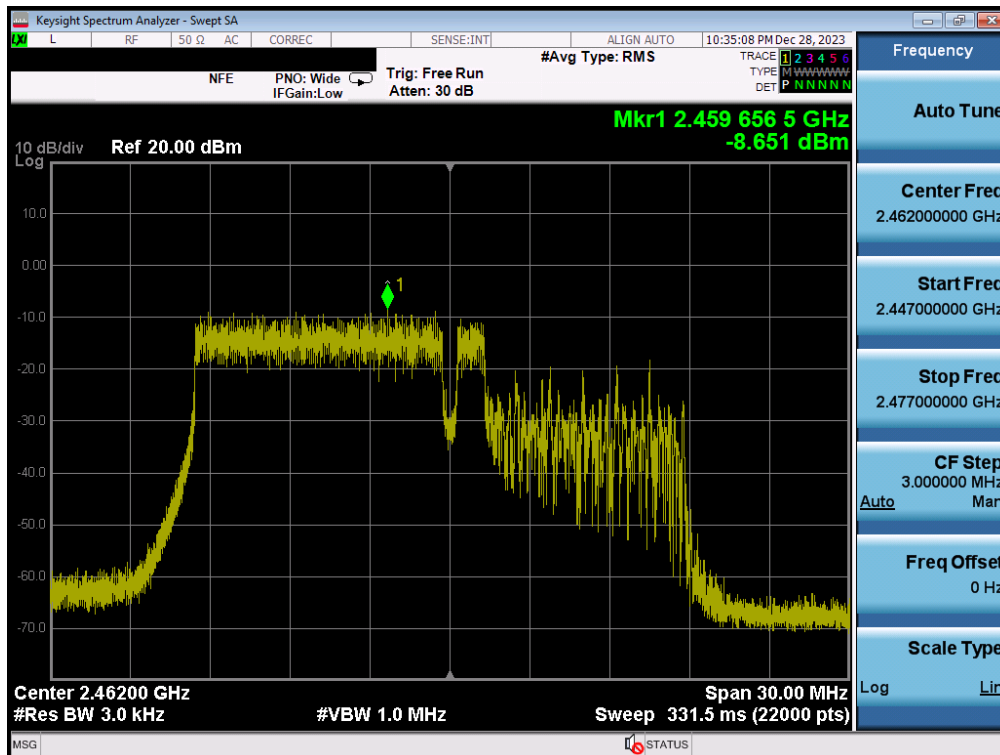


Plot 7-42. Power Spectral Density Plot MIMO ANT1 (802.11ax OFDMA – 106+26 Tones – RU Index 82 – Ch. 11)

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Technical Manager
Test Report S/N: 1M2312180128-03.A3L	Test Dates: 12/15/2023 – 1/11/2024	EUT Type: Portable Tablet	Page 38 of 54

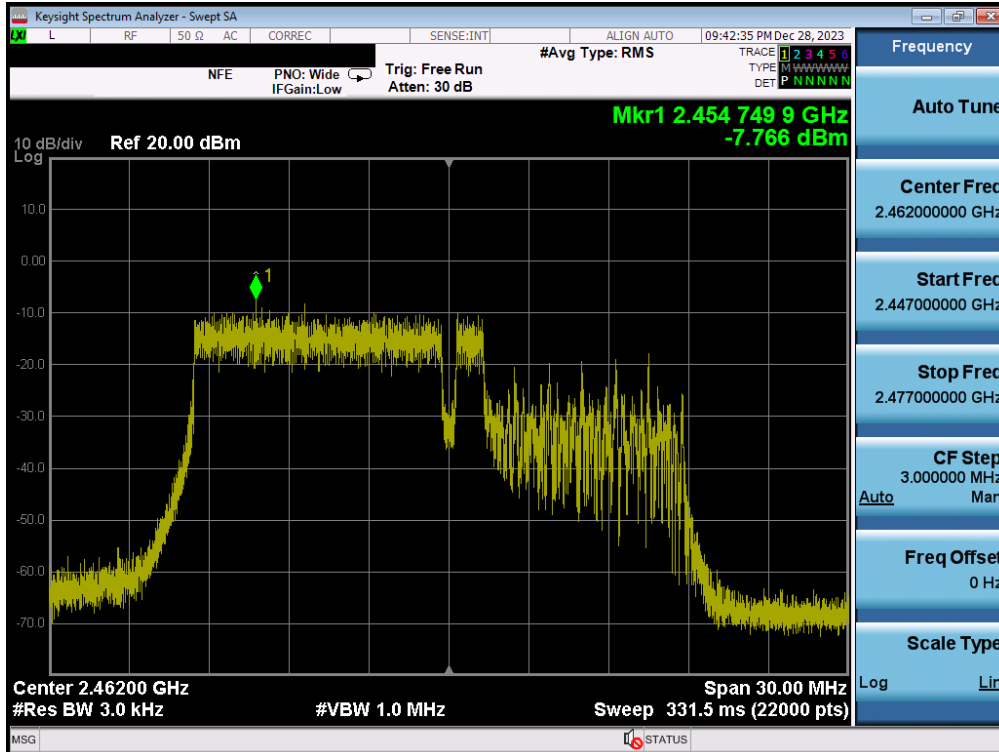


Plot 7-43. Power Spectral Density Plot MIMO ANT2 (802.11ax OFDMA – 106+26 Tones – RU Index 82 – Ch. 11)

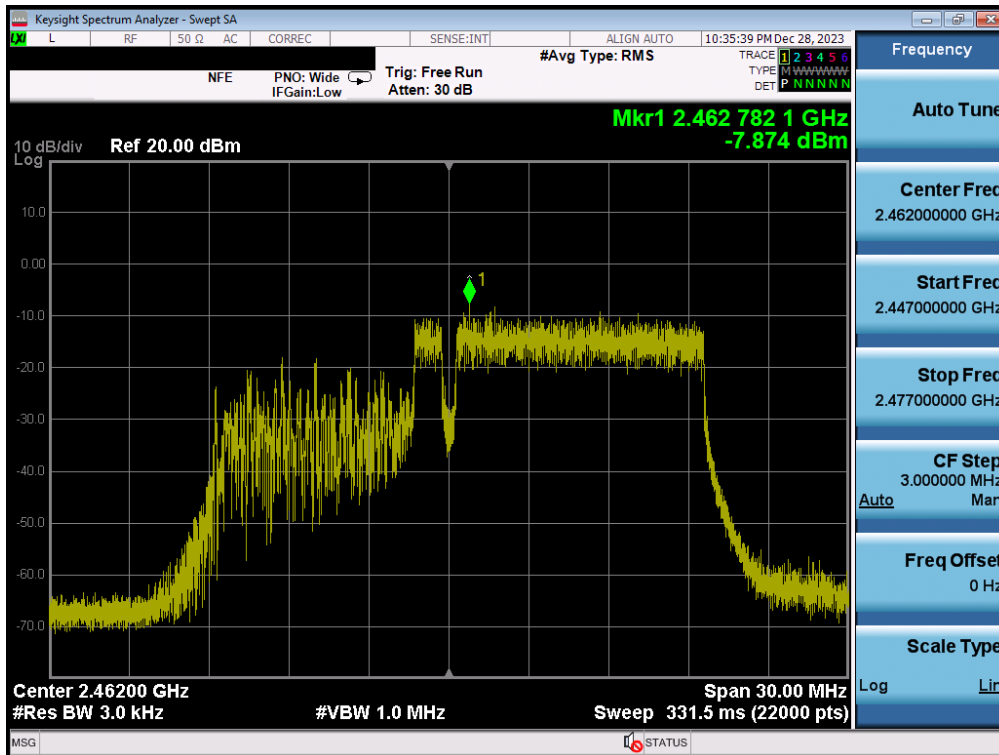

Plot 7-44. Power Spectral Density Plot MIMO ANT1 (802.11ax OFDMA – 106+26 Tones – RU Index 83 – Ch. 11)

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Technical Manager
Test Report S/N: 1M2312180128-03.A3L	Test Dates: 12/15/2023 – 1/11/2024	EUT Type: Portable Tablet	Page 39 of 54

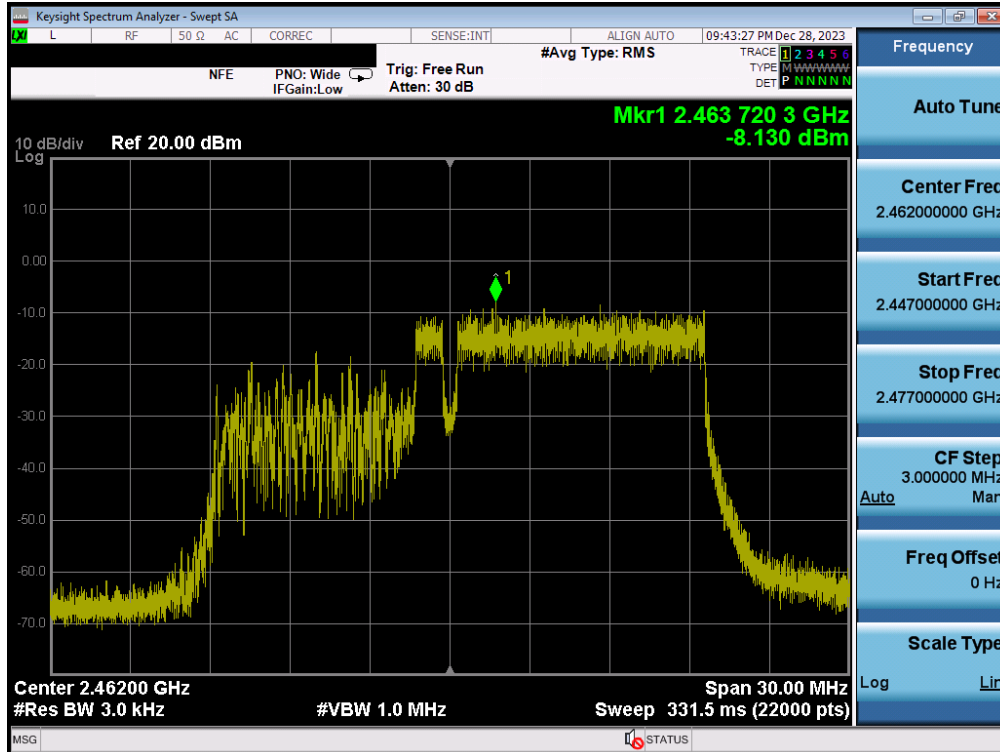

Plot 7-45. Power Spectral Density Plot MIMO ANT2 (802.11ax OFDMA – 106+26 Tones – RU Index 83 – Ch. 11)

Note:

Per ANSI C63.10-2013 Section 14.3.1, the power spectral density at Antenna 1 and Antenna 2 were first measured separately as shown in the section above. The measured values were then summed in linear power units then converted back to dBm.

Sample MIMO Calculation:

At 2412MHz the average conducted power spectral density was measured to be -7.04 dBm for Antenna 1 and -9.14 dBm for Antenna 2.

$$\text{Antenna 1} + \text{Antenna 2} = \text{MIMO}$$

$$(-7.04 \text{ dBm} + (-9.14) \text{ dBm}) = (0.20 \text{ mW} + 0.12 \text{ mW}) = 0.32 \text{ mW} = -4.95 \text{ dBm}$$

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Technical Manager
Test Report S/N: 1M2312180128-03.A3L	Test Dates: 12/15/2023 – 1/11/2024	EUT Type: Portable Tablet	Page 40 of 54

7.4 Radiated Emission Measurements

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in FCC §15.205 of the Title 47 CFR and Table 6 of RSS-Gen (8.10) must not exceed the limits shown FCC §15.209 and RSS-Gen (8.9).

Frequency	Field Strength [$\mu\text{V/m}$]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-8. Radiated Limits

Test Procedures Used

ANSI C63.10-2013 – Section 6.6.4.3

Test Settings

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = power average (RMS)
5. Number of measurement points = 1001 (Number of points must be $\geq 2 \times \text{span/RBW}$)
6. Sweep time = auto
7. Trace (RMS) averaging was performed over at least 100 traces

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Technical Manager
Test Report S/N: 1M2312180128-03.A3L	Test Dates: 12/15/2023 – 1/11/2024	EUT Type: Portable Tablet	Page 41 of 54

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

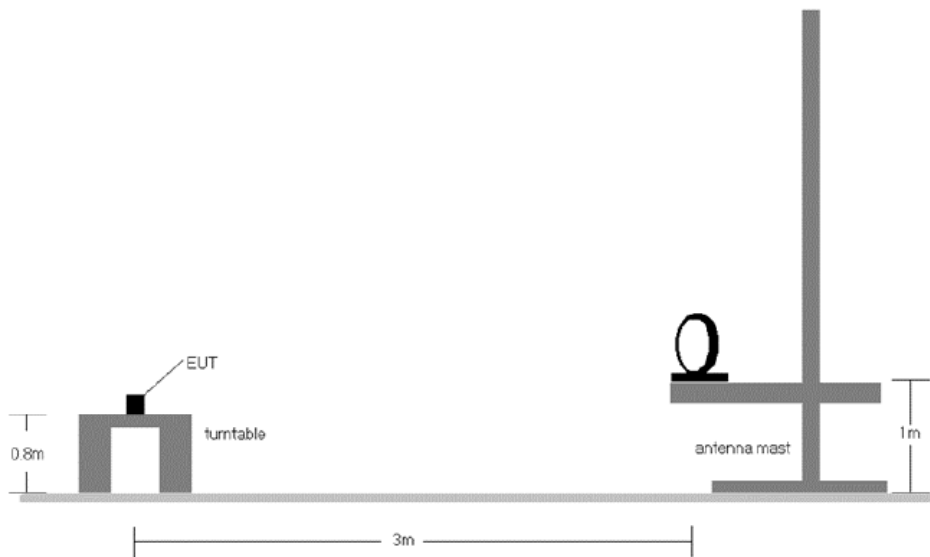


Figure 7-3. Radiated Test Setup < 30MHz

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Technical Manager
Test Report S/N: 1M2312180128-03.A3L	Test Dates: 12/15/2023 – 1/11/2024	EUT Type: Portable Tablet	Page 42 of 54

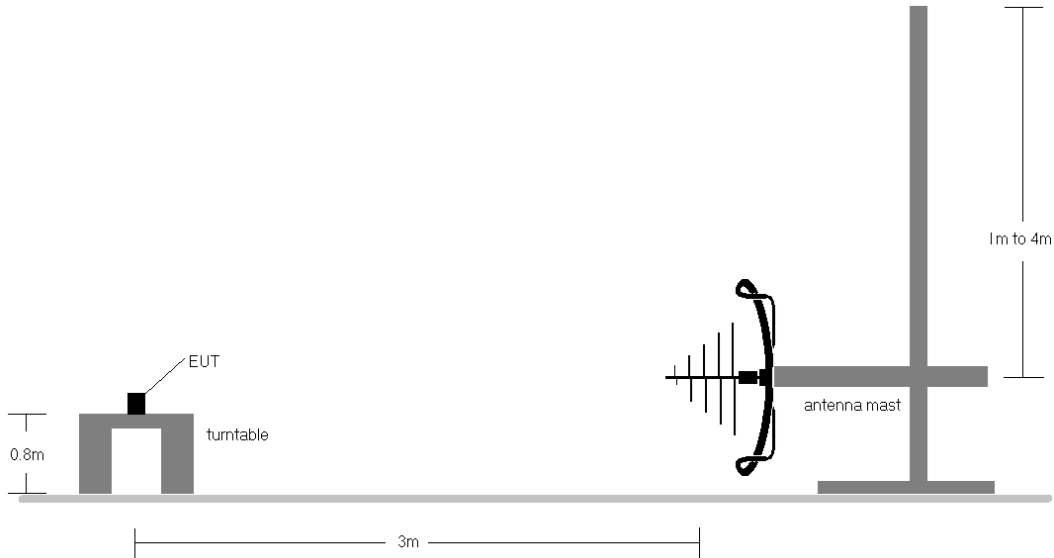


Figure 7-4. Radiated Test Setup < 1GHz

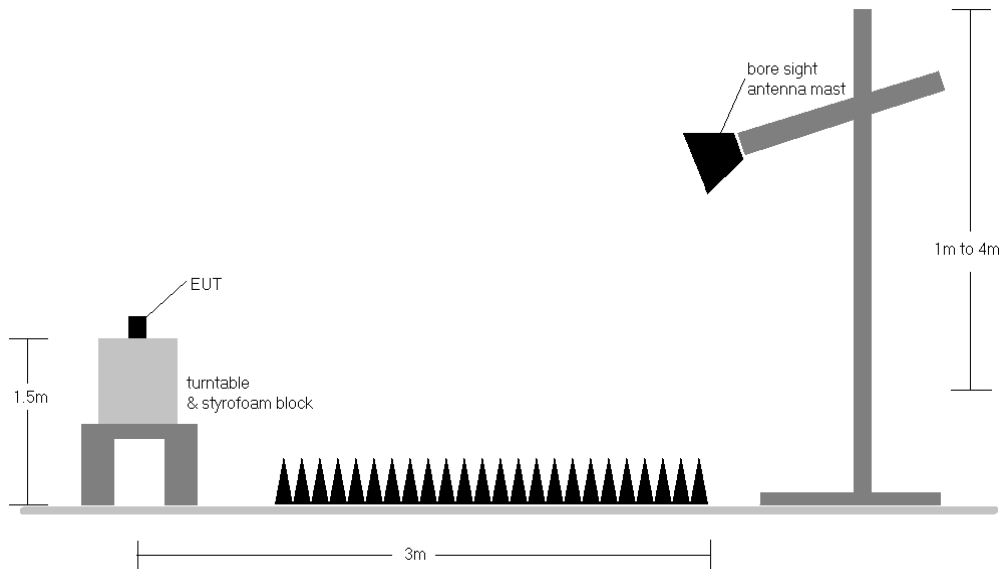


Figure 7-5. Test Instrument & Measurement Setup

Test Notes

1. The optional test procedures for antenna port conducted measurements of unwanted emissions per the guidance of ANSI C63.10-2013 Section 11.3 were not used to evaluate this device for compliance to radiated limits. All radiated spurious emissions levels were measured in a radiated test setup.
2. All emissions lying in restricted bands specified in §15.205 and Section 8.10 of RSS-Gen are below the limits shown in §15.209.
3. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Technical Manager
Test Report S/N: 1M2312180128-03.A3L	Test Dates: 12/15/2023 – 1/11/2024	EUT Type: Portable Tablet	Page 43 of 54

4. This unit tested with its standard battery.
5. The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. Above 1 GHz, average and peak measurements were taken using linearly polarized horn antennas. The worst-case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
6. Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
7. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. Any emissions found to be within 20dB of the limit are fully investigated and the results are shown in this section.
8. The "-" shown in the following RSE tables are used to denote a noise floor measurement.
9. Some band edge measurements were performed using a channel integration method to determine compliance with the out of band average radiated spurious emissions limit in the 2483.5 – 2500MHz band. Per KDB 558074 D01 v05r02 Section 13.3, a measurement was performed using a RBW of 100kHz at the frequency with highest emission outside of band edge. For integration that does not start at 2483.5MHz, consideration was taken to ensure the worst-case emission is in the 1MHz spectrum. The results were integrated up to the 1MHz reference bandwidth to show compliance with the 15.209 radiated limit for emissions greater than 1GHz.
10. For radiated measurements, emissions were investigated for the fully-loaded RU configuration and for all the partially-loaded RU configurations. Among all of the available partially-loaded RU configurations, only the configuration with the worst case emissions is reported.

Sample Calculations

Determining Spurious Emissions Levels

- Field Strength Level $_{[dB\mu V/m]} = \text{Analyzer Level }_{[dBm]} + 107 + \text{AFCL }_{[dB/m]}$
- $\text{AFCL }_{[dB/m]} = \text{Antenna Factor }_{[dB/m]} + \text{Cable Loss }_{[dB]}$
- $\text{Margin }_{[dB]} = \text{Field Strength Level }_{[dB\mu V/m]} - \text{Limit }_{[dB\mu V/m]}$

Radiated Band Edge Measurement Offset

- The amplitude offset shown in the radiated restricted band edge plots in Section 7.4 was calculated using the formula:

$$\text{Offset (dB)} = (\text{Antenna Factor} + \text{Cable Loss} + \text{Attenuator}) - \text{Preamplifier Gain}$$

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Technical Manager
Test Report S/N: 1M2312180128-03.A3L	Test Dates: 12/15/2023 – 1/11/2024	EUT Type: Portable Tablet	Page 44 of 54

7.4.1 SISO Antenna-2 Radiated Spurious Emission Measurements

Worst Case Mode: 802.11be OFDMA
 Worst Case Transfer Rate: MCS0
 RU Index: 61
 Distance of Measurements: 3 Meters
 Operating Frequency: 2437MHz
 Channel: 6

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4874.00	Avg	H	-	-	-76.01	0.32	31.31	53.98	-22.67
4874.00	Peak	H	-	-	-66.02	0.32	41.30	73.98	-32.68
7311.00	Avg	H	-	-	-78.11	6.50	35.39	53.98	-18.59
7311.00	Peak	H	-	-	-65.98	6.50	47.52	73.98	-26.46
12185.00	Avg	H	-	-	-79.82	12.92	40.10	53.98	-13.88
12185.00	Peak	H	-	-	-70.32	12.92	49.60	73.98	-24.38

Table 7-9. Radiated Measurements SISO Antenna-2 (242 Tones)

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Technical Manager
Test Report S/N: 1M2312180128-03.A3L	Test Dates: 12/15/2023 – 1/11/2024	EUT Type: Portable Tablet	Page 45 of 54

7.4.2 MIMO Radiated Spurious Emission Measurements

Worst Case Mode: 802.11be OFDMA
 Worst Case Transfer Rate: MCS0
 RU Index: 61
 Distance of Measurements: 3 Meters
 Operating Frequency: 2462MHz
 Channel: 11

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4924.00	Avg	H	-	-	-76.85	0.89	31.04	53.98	-22.94
4924.00	Peak	H	-	-	-67.24	0.89	40.65	73.98	-33.33
7386.00	Avg	H	-	-	-77.34	7.03	36.69	53.98	-17.29
7386.00	Peak	H	-	-	-68.01	7.03	46.02	73.98	-27.96
12310.00	Avg	H	-	-	-80.00	12.71	39.71	53.98	-14.27
12310.00	Peak	H	-	-	-70.12	12.71	49.59	73.98	-24.39


Table 7-10. Radiated Measurements MIMO (242 Tones)

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Technical Manager
Test Report S/N: 1M2312180128-03.A3L	Test Dates: 12/15/2023 – 1/11/2024	EUT Type: Portable Tablet	Page 46 of 54


7.4.3 SISO Antenna-2 Radiated Restricted Band Edge Measurements

The radiated restricted band edge measurements are measured with an EMI test receiver connected to the receive antenna while the EUT is transmitting.

Worst Case Mode:	802.11be OFDMA
Worst Case Transfer Rate:	MCS0
RU Index:	82
Distance of Measurements:	3 Meters
Operating Frequency:	2412MHz
Channel:	1

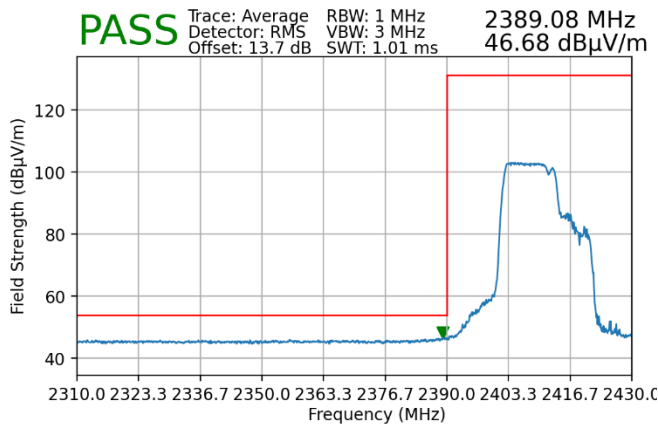


Plot 7-46. Radiated Restricted Lower Band Edge Measurement SISO ANT2 (Average – 106+26 Tones)

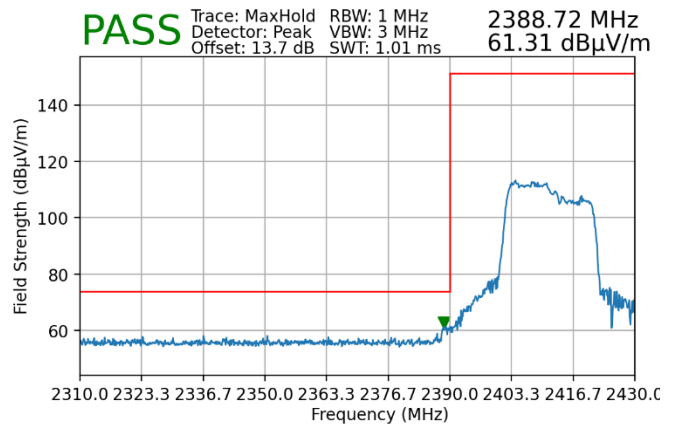


Plot 7-47. Radiated Restricted Lower Band Edge Measurement SISO ANT2 (Peak – 106+26 Tones)

Worst Case Mode:	802.11be OFDMA
Worst Case Transfer Rate:	MCS0
RU Index:	83
Distance of Measurements:	3 Meters
Operating Frequency:	2462MHz
Channel:	11

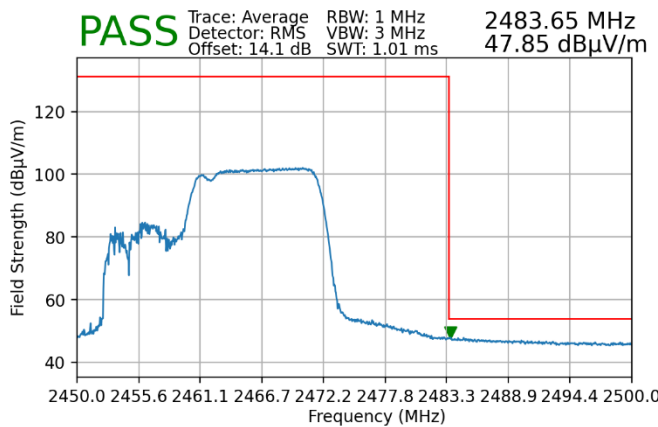


Plot 7-48. Radiated Restricted Upper Band Edge Measurement SISO ANT2 (Average – 106+26 Tones)

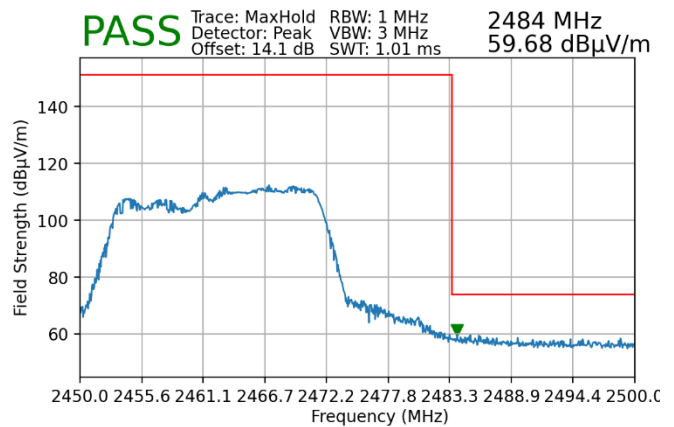


Plot 7-49. Radiated Restricted Upper Band Edge Measurement SISO ANT2 (Peak – 106+26 Tones)

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Technical Manager
Test Report S/N: 1M2312180128-03.A3L	Test Dates: 12/15/2023 – 1/11/2024	EUT Type: Portable Tablet	Page 47 of 54

Worst Case Mode: 802.11be OFDMA
 Worst Case Transfer Rate: MCS0
 RU Index: 83
 Distance of Measurements: 3 Meters
 Operating Frequency: 2467MHz
 Channel: 12

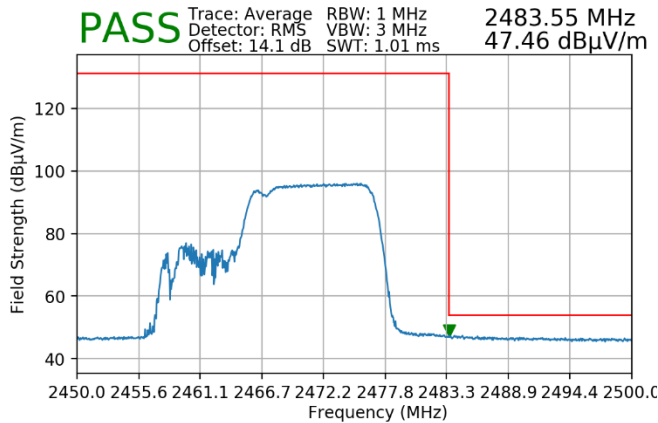


Plot 7-50. Radiated Restricted Lower Band Edge Measurement SISO ANT2 (Average – 106+26 Tones)

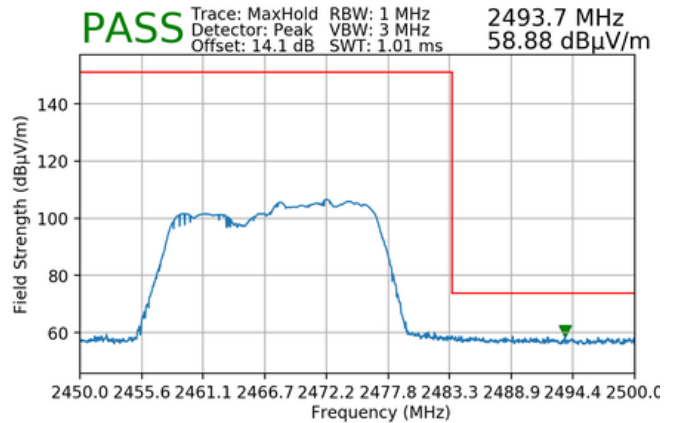


Plot 7-51. Radiated Restricted Lower Band Edge Measurement SISO ANT2 (Peak – 106+26 Tones)

Worst Case Mode: 802.11be OFDMA
 Worst Case Transfer Rate: MCS0
 RU Index: 83
 Distance of Measurements: 3 Meters
 Operating Frequency: 2472MHz
 Channel: 13

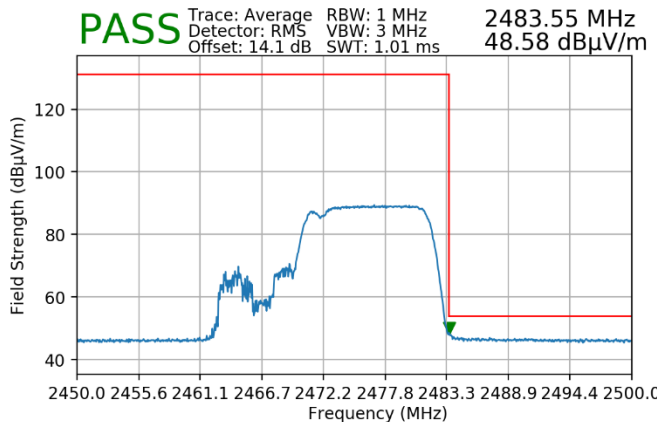

Plot 7-52. Radiated Restricted Upper Band Edge Measurement SISO ANT2 (Average – 106+26 Tones)

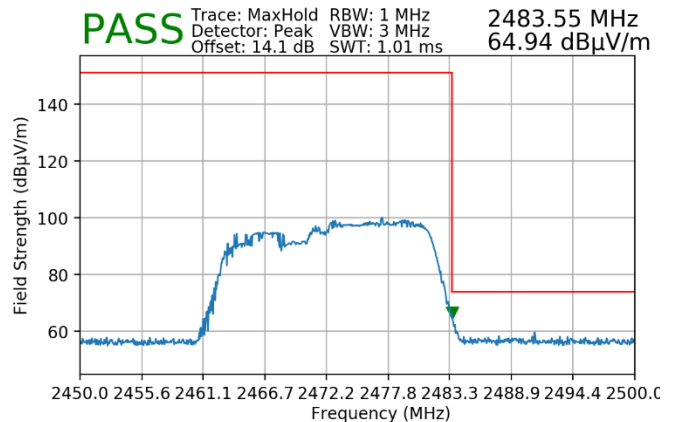


Plot 7-53. Radiated Restricted Upper Band Edge Measurement SISO ANT2 (Peak – 106+26 Tones)


FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Technical Manager
Test Report S/N: 1M2312180128-03.A3L	Test Dates: 12/15/2023 – 1/11/2024	EUT Type: Portable Tablet	Page 48 of 54



Worst Case Mode: 802.11be OFDMA
 Worst Case Transfer Rate: MCS0
 RU Index: 61
 Distance of Measurements: 3 Meters
 Operating Frequency: 2412MHz
 Channel: 1

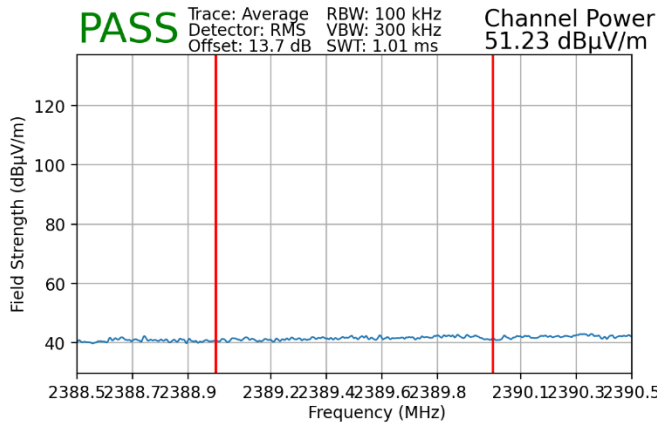


Plot 7-54. Radiated Restricted Lower Band Edge Measurement SISO ANT2 (Average – 242 Tones)

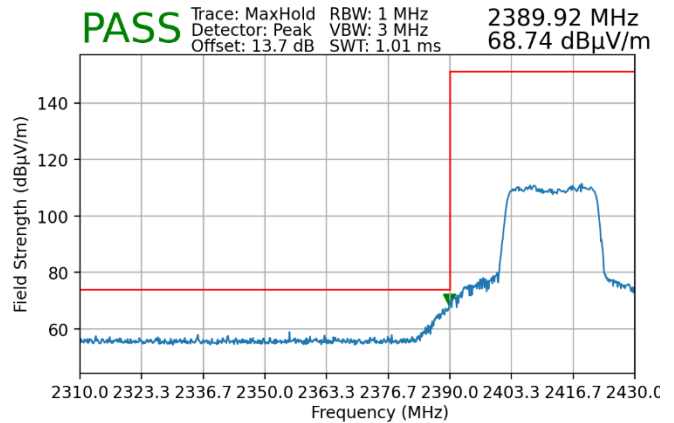


Plot 7-55. Radiated Restricted Lower Band Edge Measurement SISO ANT2 (Peak – 242 Tones)

Worst Case Mode: 802.11be OFDMA
 Worst Case Transfer Rate: MCS0
 RU Index: 61
 Distance of Measurements: 3 Meters
 Operating Frequency: 2462MHz
 Channel: 11

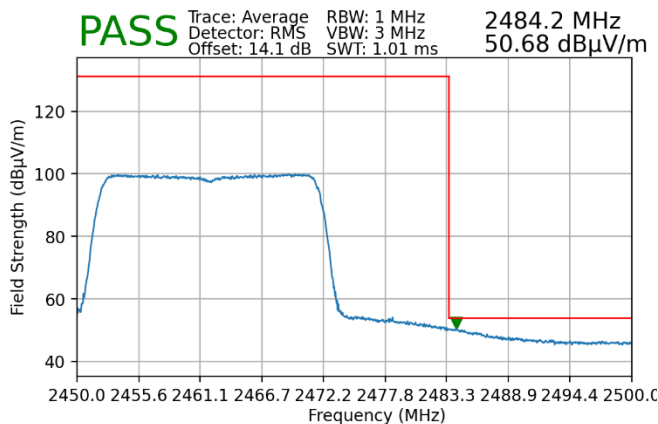


Plot 7-56. Radiated Restricted Upper Band Edge Measurement SISO ANT2 (Average – 242 Tones)

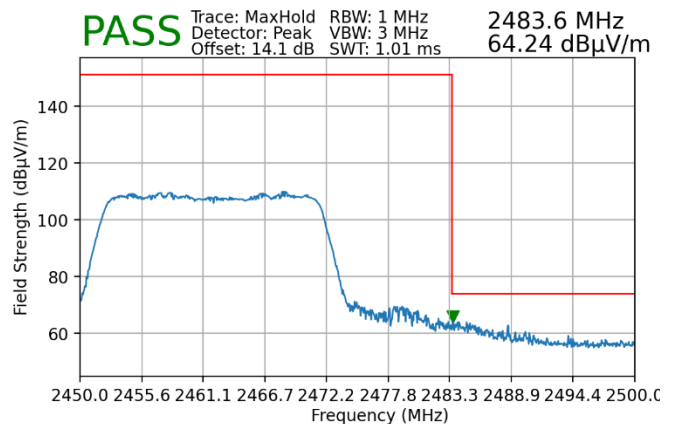


Plot 7-57. Radiated Restricted Upper Band Edge Measurement SISO ANT2 (Peak – 242 Tones)

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Technical Manager
Test Report S/N: 1M2312180128-03.A3L	Test Dates: 12/15/2023 – 1/11/2024	EUT Type: Portable Tablet	Page 49 of 54

Worst Case Mode: 802.11be OFDMA
 Worst Case Transfer Rate: MCS0
 RU Index: 61
 Distance of Measurements: 3 Meters
 Operating Frequency: 2467MHz
 Channel: 12

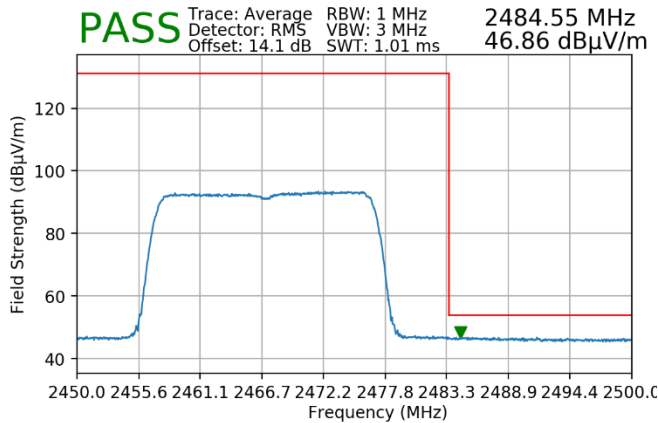


Plot 7-58. Radiated Restricted Lower Band Edge Measurement SISO ANT2 (Average – 242 Tones)

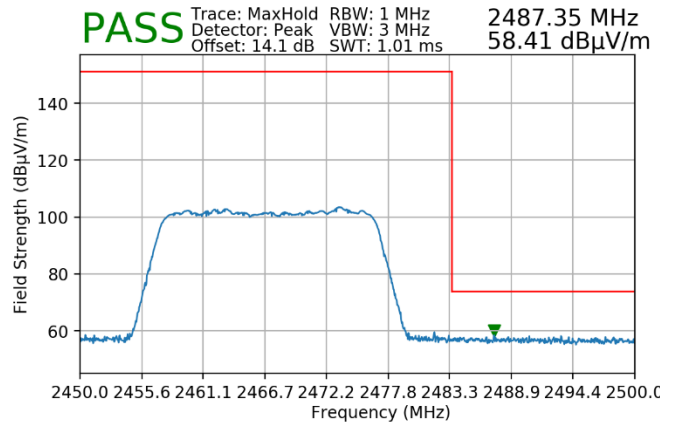


Plot 7-59. Radiated Restricted Lower Band Edge Measurement SISO ANT2 (Peak – 242 Tones)

Worst Case Mode: 802.11be OFDMA
 Worst Case Transfer Rate: MCS0
 RU Index: 61
 Distance of Measurements: 3 Meters
 Operating Frequency: 2472MHz
 Channel: 13

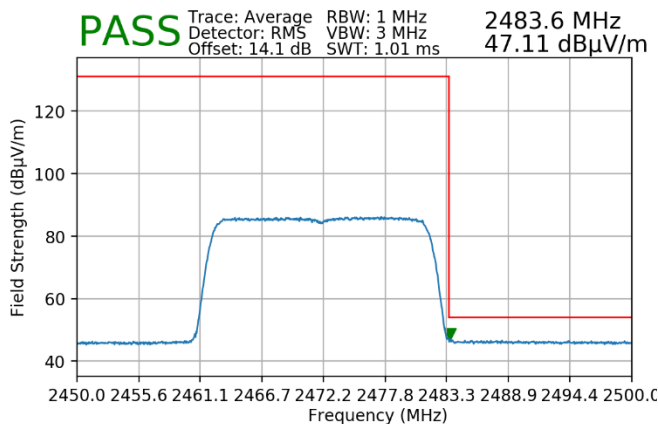

Plot 7-60. Radiated Restricted Upper Band Edge Measurement SISO ANT2 (Average – 242 Tones)

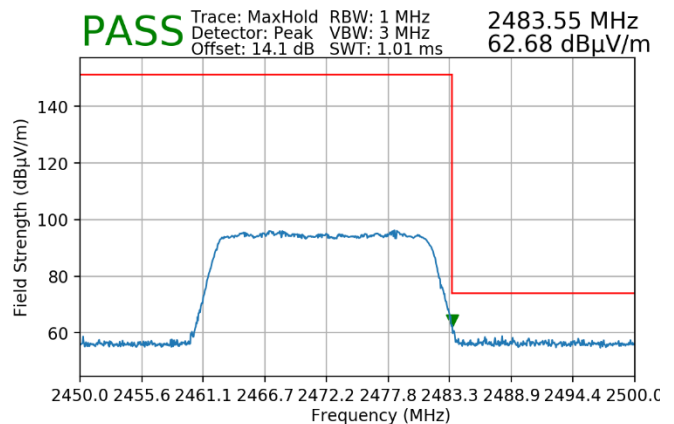


Plot 7-61. Radiated Restricted Upper Band Edge Measurement SISO ANT2 (Peak – 242 Tones)

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Technical Manager
Test Report S/N: 1M2312180128-03.A3L	Test Dates: 12/15/2023 – 1/11/2024	EUT Type: Portable Tablet	Page 50 of 54


7.4.4 MIMO Radiated Restricted Band Edge Measurements

The radiated restricted band edge measurements are measured with an EMI test receiver connected to the receive antenna while the EUT is transmitting.

Worst Case Mode:	802.11be OFDMA
Worst Case Transfer Rate:	MCS0
RU Index:	82
Distance of Measurements:	3 Meters
Operating Frequency:	2412MHz
Channel:	1

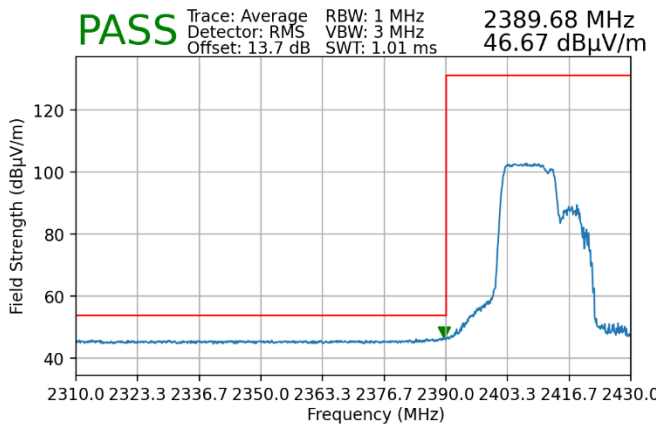


Plot 7-62. Radiated Restricted Lower Band Edge Measurement MIMO (Average – 106+26 Tones)

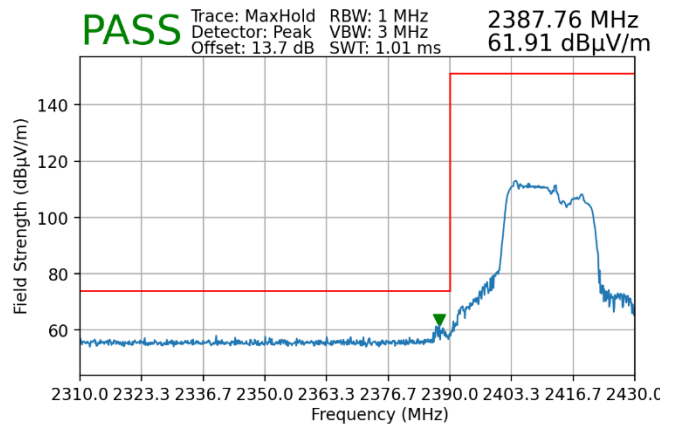


Plot 7-63. Radiated Restricted Lower Band Edge Measurement MIMO (Peak – 106+26 Tones)

Worst Case Mode:	802.11be OFDMA
Worst Case Transfer Rate:	MCS0
RU Index:	83
Distance of Measurements:	3 Meters
Operating Frequency:	2462MHz
Channel:	11

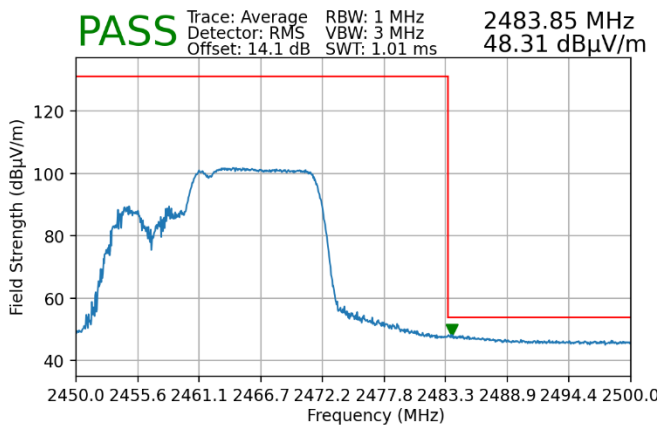


Plot 7-64. Radiated Restricted Upper Band Edge Measurement MIMO (Average – 106+26 Tones)

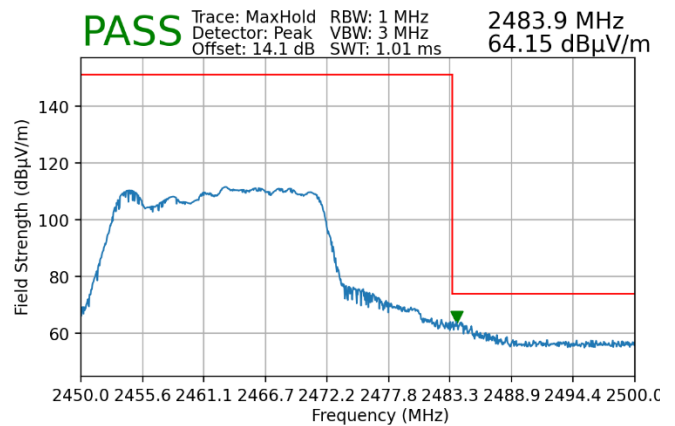


Plot 7-65. Radiated Restricted Upper Band Edge Measurement MIMO (Peak – 106+26 Tones)

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Technical Manager
Test Report S/N: 1M2312180128-03.A3L	Test Dates: 12/15/2023 – 1/11/2024	EUT Type: Portable Tablet	Page 51 of 54

Worst Case Mode: 802.11be OFDMA
 Worst Case Transfer Rate: MCS0
 RU Index: 83
 Distance of Measurements: 3 Meters
 Operating Frequency: 2467MHz
 Channel: 12

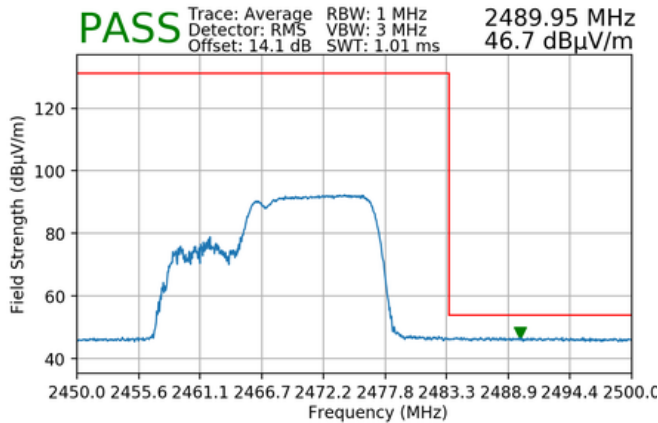


Plot 7-66. Radiated Restricted Lower Band Edge Measurement MIMO (Average – 106+26 Tones)

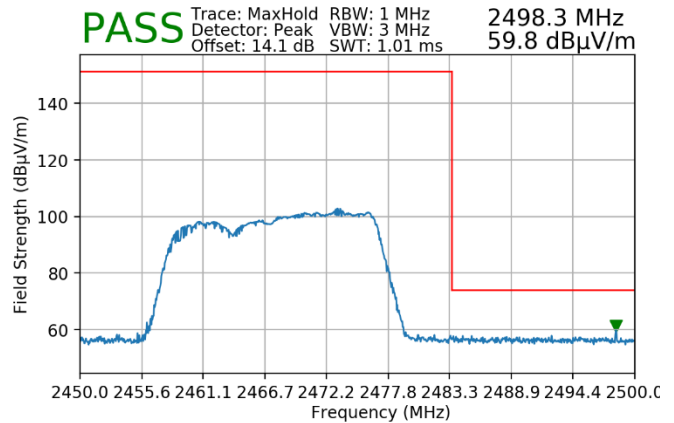


Plot 7-67. Radiated Restricted Lower Band Edge Measurement MIMO (Peak – 52+26 Tones)

Worst Case Mode: 802.11be OFDMA
 Worst Case Transfer Rate: MCS0
 RU Index: 83
 Distance of Measurements: 3 Meters
 Operating Frequency: 2472MHz
 Channel: 13

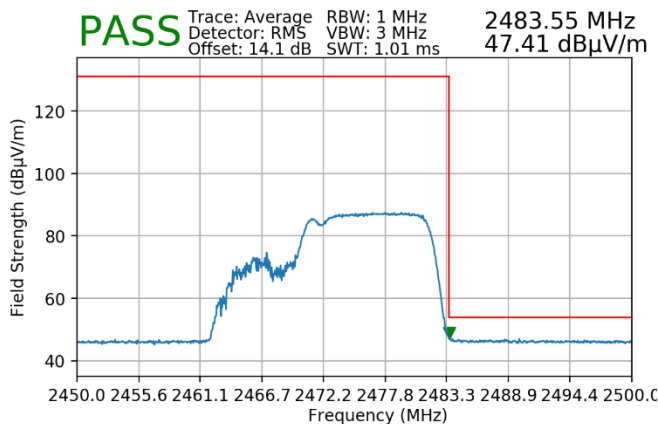


Plot 7-68. Radiated Restricted Upper Band Edge Measurement MIMO (Average – 106+26 Tones)

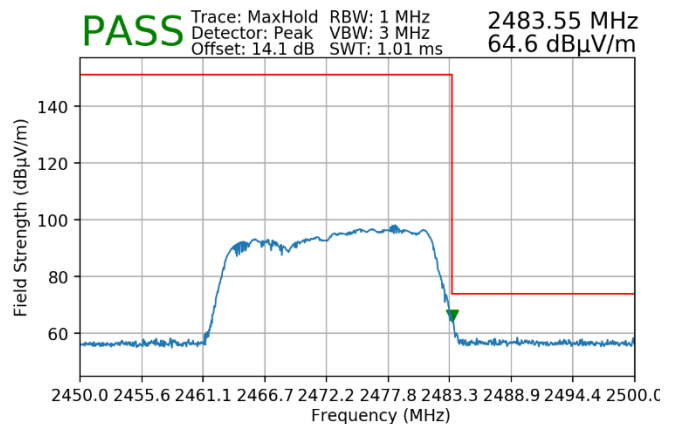


Plot 7-69. Radiated Restricted Upper Band Edge Measurement MIMO (Peak – 106+26 Tones)

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Technical Manager
Test Report S/N: 1M2312180128-03.A3L	Test Dates: 12/15/2023 – 1/11/2024	EUT Type: Portable Tablet	Page 52 of 54

Worst Case Mode: 802.11be OFDMA
 Worst Case Transfer Rate: MCS0
 RU Index: 61
 Distance of Measurements: 3 Meters
 Operating Frequency: 2412MHz
 Channel: 1

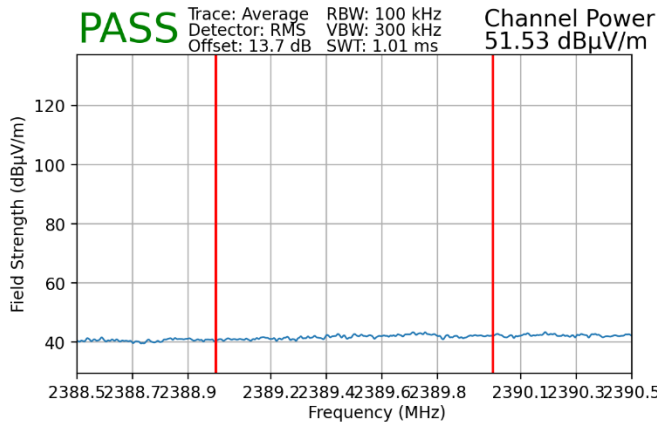


Plot 7-70. Radiated Restricted Lower Band Edge Measurement MIMO (Average – 242 Tones)

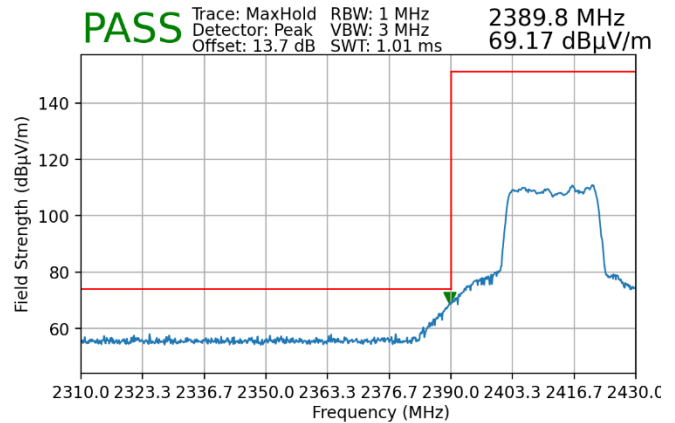


Plot 7-71. Radiated Restricted Lower Band Edge Measurement MIMO (Peak – 242 Tones)

Worst Case Mode: 802.11be OFDMA
 Worst Case Transfer Rate: MCS0
 RU Index: 61
 Distance of Measurements: 3 Meters
 Operating Frequency: 2462MHz
 Channel: 11

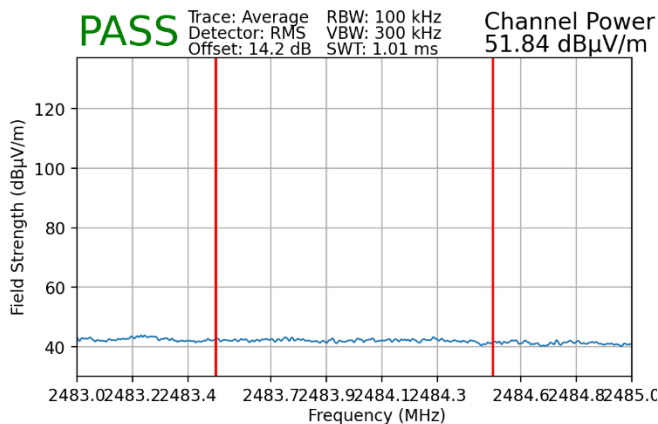

Plot 7-72. Radiated Restricted Upper Band Edge Measurement MIMO (Average – 242 Tones)

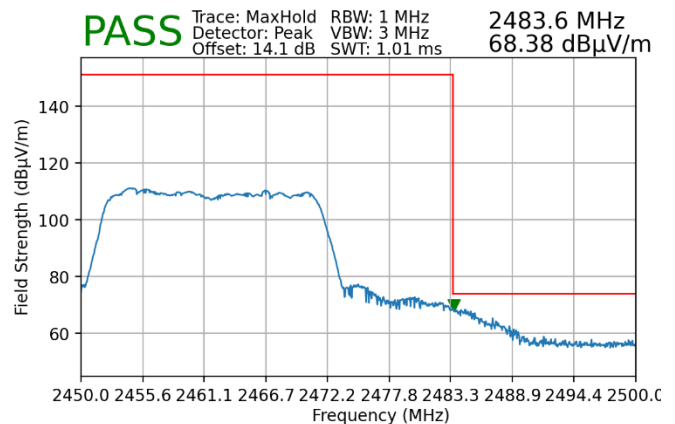

Plot 7-73. Radiated Restricted Upper Band Edge Measurement MIMO (Peak – 242 Tones)

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Technical Manager
Test Report S/N: 1M2312180128-03.A3L	Test Dates: 12/15/2023 – 1/11/2024	EUT Type: Portable Tablet	Page 53 of 54

8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Samsung Portable Tablet FCC ID: A3LSMX910, IC: 649E-SMX910** is in compliance with Part 15 Subpart C (15.247) of the FCC rules and RSS-247 of the ISED Canada rules.

FCC ID: A3LSMX910 IC: 649E-SMX910	MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Technical Manager
Test Report S/N: 1M2312180128-03.A3L	Test Dates: 12/15/2023 – 1/11/2024	EUT Type: Portable Tablet	Page 54 of 54