



FCC CFR47 PART 15 SUBPART C

CERTIFICATION TEST REPORT

FOR

GSM Phone + Bluetooth/BLE and DTS b/g/n

MODEL NUMBER : SM-Z300H/DD

FCC ID: A3LSMZ300HDD

REPORT NUMBER: 15K21453-E1

ISSUE DATE: AUG 31, 2015

Prepared for

**SAMSUNG ELECTRONICS CO., LTD.
129 SAMSUNG-RO, YEONGTONG-GU, SUWON-SI,
GYEONGGI-DO, 443-742, KOREA**

Prepared by

**UL Korea, Ltd. Suwon Laboratory
218 Maeyeong-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 443-823, Korea
TEL: (031) 337-9902
FAX: (031) 213-5433**



ACCREDITED

TL-637

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
--	08/24/15	Initial issue	Junwhan Lee
--	08/31/15	Add Note on section 11.2	Junwhan Lee

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	5
2. TEST METHODOLOGY	6
3. FACILITIES AND ACCREDITATION	6
4. CALIBRATION AND UNCERTAINTY	6
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i>	<i>6</i>
4.2. <i>SAMPLE CALCULATION</i>	<i>6</i>
4.3. <i>MEASUREMENT UNCERTAINTY.....</i>	<i>7</i>
5. EQUIPMENT UNDER TEST.....	8
5.1. <i>DESCRIPTION OF EUT</i>	<i>8</i>
5.2. <i>MAXIMUM OUTPUT POWER.....</i>	<i>8</i>
5.3. <i>DESCRIPTION OF AVAILABLE ANTENNAS</i>	<i>8</i>
5.4. <i>WORST-CASE CONFIGURATION AND MODE.....</i>	<i>8</i>
5.5. <i>DESCRIPTION OF TEST SETUP.....</i>	<i>9</i>
6. TEST AND MEASUREMENT EQUIPMENT	11
7. MEASUREMENT METHODS	12
8. ON TIME, DUTY CYCLE AND MEASUREMENT METHODS	12
8.1. <i>ON TIME AND DUTY CYCLE RESULTS.....</i>	<i>12</i>
9. SUMMARY TABLE	13
10. ANTENNA PORT TEST RESULTS	14
10.1. <i>6 dB BANDWIDTH</i>	<i>14</i>
10.1.1. <i>802.11b MODE IN THE 2.4 GHz BAND</i>	<i>14</i>
10.1.2. <i>802.11g MODE IN THE 2.4 GHz BAND</i>	<i>14</i>
10.1.3. <i>802.11n HT20 MODE IN THE 2.4 GHz BAND.....</i>	<i>14</i>
10.1.4. <i>6 dB BANDWIDTH PLOTS.....</i>	<i>15</i>
10.2. <i>99% BANDWIDTH</i>	<i>18</i>
10.2.1. <i>802.11b MODE IN THE 2.4 GHz BAND</i>	<i>18</i>
10.2.2. <i>802.11g MODE IN THE 2.4 GHz BAND</i>	<i>18</i>
10.2.3. <i>802.11n HT20 MODE IN THE 2.4 GHz BAND.....</i>	<i>18</i>
10.2.4. <i>99% BANDWIDTH PLOTS.....</i>	<i>19</i>
10.3. <i>OUTPUT POWER.....</i>	<i>22</i>
10.3.1. <i>802.11b MODE IN THE 2.4 GHz BAND</i>	<i>22</i>
10.3.2. <i>802.11g MODE IN THE 2.4 GHz BAND</i>	<i>23</i>
10.3.3. <i>802.11n HT20 MODE IN THE 2.4 GHz BAND.....</i>	<i>23</i>
10.4. <i>PSD.....</i>	<i>24</i>

10.4.1.	802.11b MODE IN THE 2.4 GHz BAND	24
10.4.2.	802.11g MODE IN THE 2.4 GHz BAND	24
10.4.3.	802.11n HT20 MODE IN THE 2.4 GHz BAND.....	24
10.4.4.	PSD PLOTS	25
10.5.	<i>OUT-OF-BAND EMISSIONS</i>	28
10.5.1.	802.11b MODE IN THE 2.4 GHz BAND	29
10.5.2.	802.11g MODE IN THE 2.4 GHz BAND	30
10.5.3.	802.11n HT20 MODE IN THE 2.4 GHz BAND.....	31
11.	RADIATED TEST RESULTS	32
11.1.	<i>LIMITS AND PROCEDURE</i>	32
11.2.	<i>TRANSMITTER ABOVE 1 GHz</i>	33
11.2.1.	TX ABOVE 1 GHz 802.11b MODE IN THE 2.4 GHz BAND.....	33
11.2.2.	TX ABOVE 1 GHz 802.11g MODE IN THE 2.4 GHz BAND.....	43
11.2.3.	TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 2.4 GHz BAND	53
11.3.	<i>WORST-CASE BELOW 1 GHz</i>	63
12.	AC POWER LINE CONDUCTED EMISSIONS	65
13.	SETUP PHOTOS	68

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: SAMSUNG ELECTRONICS CO., LTD.
EUT DESCRIPTION: GSM Phone + Bluetooth/BLE and DTS b/g/n
MODEL NUMBER: SM-Z300H/DD
SERIAL NUMBER: R31G700F46E, R31G700WT2P (RADIATED);
R31G700F50R (CONDUCTED)
DATE TESTED: AUG 03, 2015 - AUG 21, 2015

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Pass

UL Korea, Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Korea, Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Korea, Ltd. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Korea, Ltd. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by IAS, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Korea, Ltd. By:



CY Choi
Suwon Lab Engineer
UL Korea, Ltd.

Tested By:



Junwhan Lee
Suwon Lab Engineer
UL Korea, Ltd.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10-2009, FCC CFR 47 Part 2, FCC CFR 47 Part 15.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 218 Maeyeong-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 443-823, Korea. Line conducted emissions are measured only at the 218 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

218 Maeyeong-ro	
<input type="checkbox"/>	Chamber 1
<input checked="" type="checkbox"/>	Chamber 2

UL Korea, Ltd. is accredited by IAS, Laboratory Code TL-637. The full scope of accreditation can be viewed at <http://www.iasonline.org/PDF/TL/TL-637.pdf>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	2.32 dB
Radiated Disturbance, Below 1GHz	4.14 dB
Radiated Disturbance, Above 1 GHz	5.97 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a GSM Phone + Bluetooth/BLE and DTS b/g/n.

This test report addresses the DTS (WLAN) operational mode.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum total conducted average output power as follows:

Frequency Range [MHz]	Mode	Output Power [dBm]	Output Power [mW]
2412 - 2462	802.11b	16.92	49.20
	802.11g	14.15	26.00
	802.11n HT20	13.02	20.04

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes an FPCB antennas, with a antenna's maximum gain of -1.5 dBi.

5.4. WORST-CASE CONFIGURATION AND MODE

Radiated emission and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

The fundamental of the EUT was investigated in three orthogonal orientations X, Y and Z it was determined that Z orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in Z orientation.

Based on the baseline scan, the worst-case data rates were:

802.11b mode: 1 Mbps

802.11g mode: 6 Mbps

802.11n HT20 mode: MCS0

5.5. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Charger	SAMSUNG	ETA0U84IWE	R37G71A04M0RC3	N/A
Data Cable	SAMSUNG	ECB-DU68WE	N/A	N/A
Earphone	SAMSUNG	EHS61ASFWE	N/A	N/A


I/O CABLES

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC Power	1	Mini-USB	Shielded	0.8m	N/A
2	Audio	1	Mini-Jack	Unshielded	1.0m	N/A

TEST SETUP

The EUT is a stand-alone unit during the tests. Test software exercised the radio card.

SETUP DIAGRAM FOR TESTS

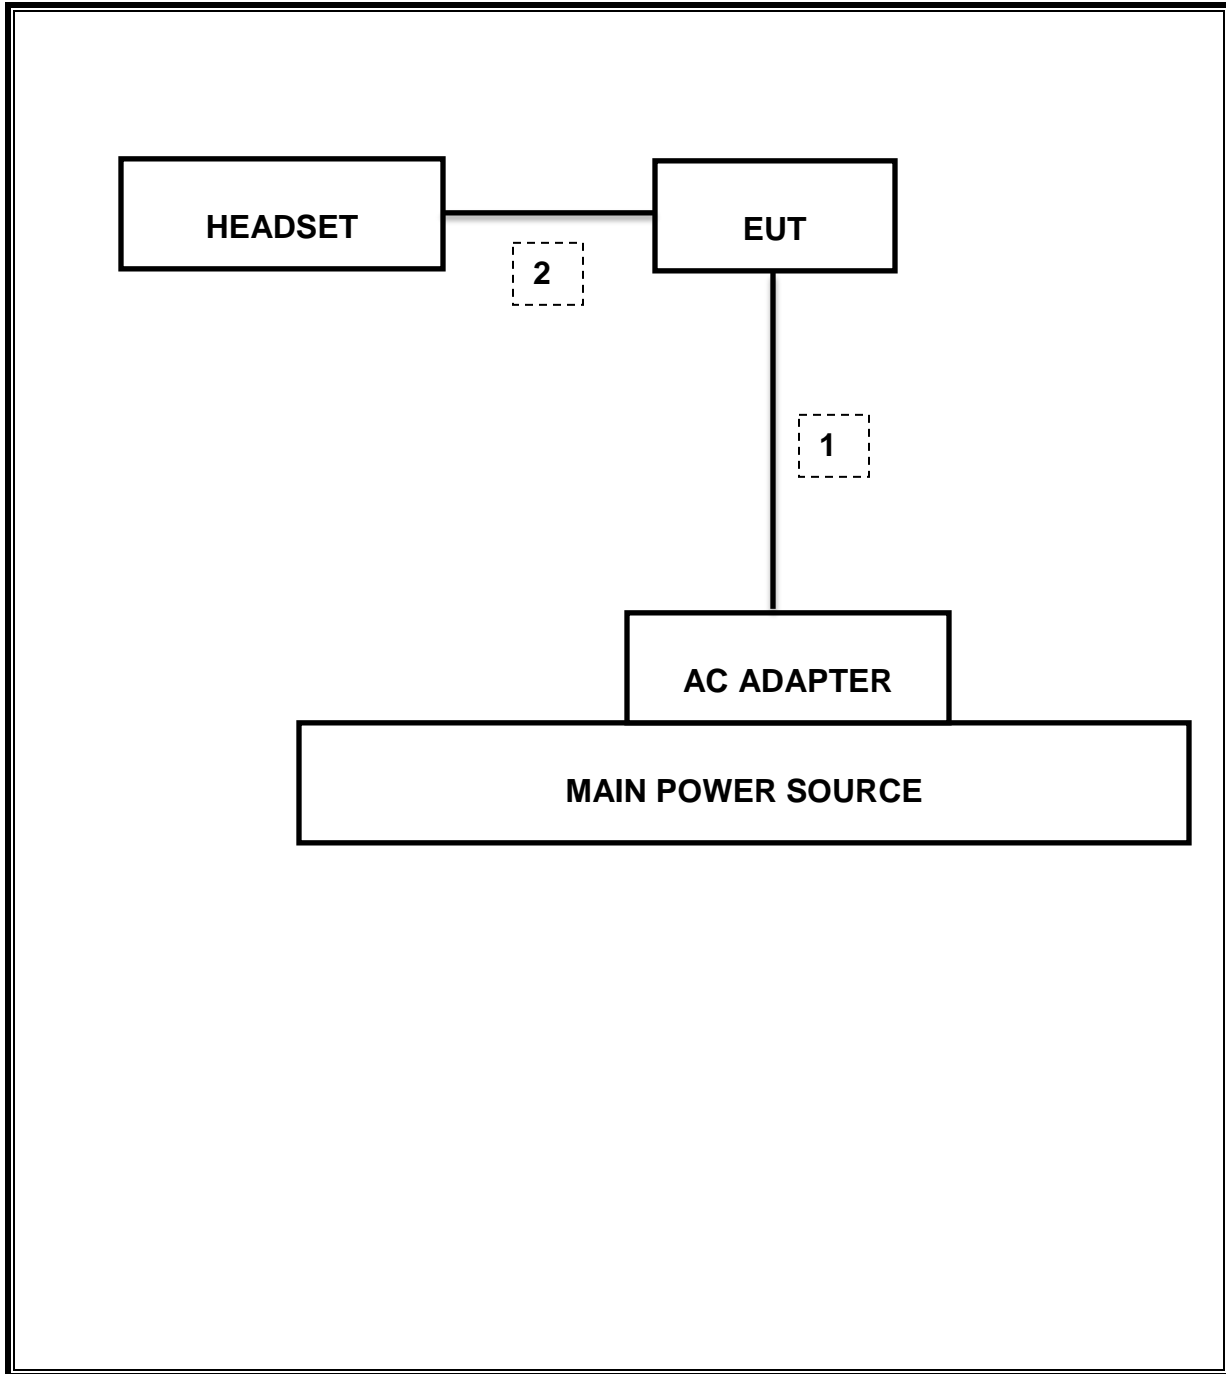

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	S/N	Cal Due
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	750	11-17-15
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	749	04-25-16
Antenna, Horn, 18 GHz	ETS	3115	00167211	09-20-15
Antenna, Horn, 18 GHz	ETS	3115	00161451	05-17-16
Antenna, Horn, 18 GHz	ETS	3117	00168724	06-17-16
Antenna, Horn, 18 GHz	ETS	3117	00168717	06-17-16
Antenna, Horn, 40 GHz	ETS	3116C	00166255	09-23-15
Antenna, Horn, 40 GHz	ETS	3116C-PA	00168841	09-29-15
Preamplifier, 1000 MHz	Sonoma	310N	341282	08-18-16
Preamplifier, 1000 MHz	Sonoma	310N	351741	08-18-16
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	1876511	08-18-16
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	1896138	08-18-16
Spectrum Analyzer, 44 GHz	Agilent / HP	N9030A	MY54170614	08-19-16
Spectrum Analyzer, 44 GHz	Agilent / HP	N9030A	MY54490312	08-19-16
Bluetooth Tester	TESCOM	TC-3000C	3000C000546	08-18-16
Average Power Sensor	R&S	NRZ-Z91	102681	08-18-16
Average Power Sensor	Agilent / HP	U2000	MY54270007	08-18-16
EMI Test Receive, 40 GHz	R&S	ESU40	100439	08-19-16
EMI Test Receive, 40 GHz	R&S	ESU40	100457	08-19-16
EMI Test Receive, 3 GHz	R&S	ESR3	101832	08-19-16
Attenuator / Switch driver	HP	11713A	3748A04272	N/A
Low Pass Filter 3GHz	Micro-Tronics	LPS17541	009	08-18-16
Low Pass Filter 3GHz	Micro-Tronics	LPS17541	015	08-18-16
High Pass Filter 5GHz	Micro-Tronics	HPS17542	009	08-18-16
High Pass Filter 6GHz	Micro-Tronics	HPM17543	010	08-18-16
High Pass Filter 5GHz	Micro-Tronics	HPS17542	016	08-18-16
High Pass Filter 6GHz	Micro-Tronics	HPM17543	015	08-18-16
LISN	R&S	ENV-216	101836	08-19-16
LISN	R&S	ENV-216	101837	08-19-16

7. MEASUREMENT METHODS

KDB 558074 D01 DTS Meas Guidance v03r03: Measurement Procedure §9.2.3.1 AVGPM is used for power and §10.2 AVGPSD-2 is used for power spectral density.

Unwanted emissions within Restricted Bands are measured using traditional radiated procedures.

Band edge emissions within Restricted Bands are measured using RMS with duty cycle factor offset method.


8. ON TIME, DUTY CYCLE AND MEASUREMENT METHODS

LIMITS

None; for reporting purposes only.

8.1. ON TIME AND DUTY CYCLE RESULTS

Mode	ON Time B [msec]	Period [msec]	Duty Cycle x [linear]	Duty Cycle [%]	Duty Cycle Correction Factor [dB]	1/T Minimum VBW [kHz]
2400MHz Bands						
802.11b	8.38	8.483	0.988	98.8%	0.00	0.010
802.11g	1.392	1.488	0.935	93.5%	0.29	0.718
802.11n HT20	1.173	1.269	0.924	92.4%	0.34	0.853

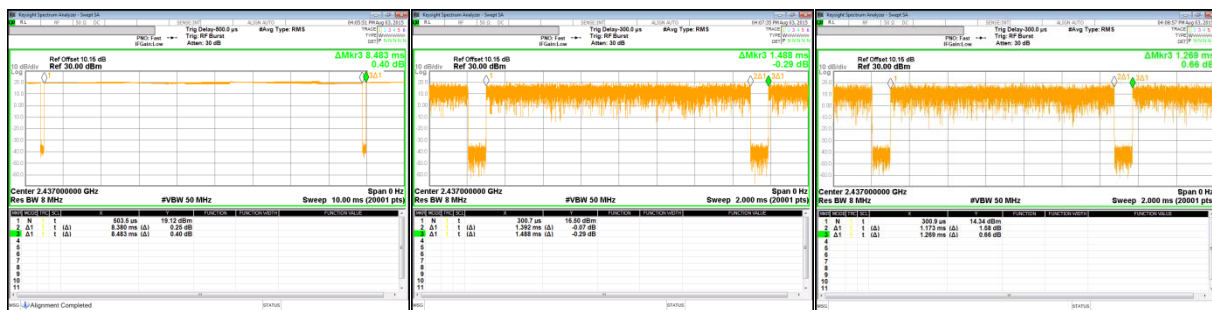

[802.11b Mode]

[802.11g Mode]

[802.11n Mode]

9. SUMMARY TABLE

FCC Part Section	Test Description	Test Limit	Test Condition	Test Result	Worst Case
15.247 (a)(2)	Occupied Band width (6dB)	>500KHz	Conducted	Pass	9.083 MHz
2.1051, 15.247 (d)	Band Edge / Conducted Spurious Emission	-20dBc		Pass	-30.605 dBm
15.247	TX conducted output power	<30dBm		Pass	16.92 dBm
15.247	PSD	<8dBm		Pass	-9.61 dBm
15.207 (a)	AC Power Line conducted emissions	Section 10	Power Line conducted	Pass	47.63 dBuV (AV)
15.205, 15.209	Radiated Spurious Emission	< 54dBuV/m	Radiated	Pass	41.72 dBuV/m (AV)

10. ANTENNA PORT TEST RESULTS

10.1. 6 dB BANDWIDTH

LIMITS

FCC §15.247 (a) (2)

The minimum 6 dB bandwidth shall be at least 500 kHz.

TEST PROCEDURE

Reference to KDB 558074 D01 DTS Meas Guidance v03r03: The transmitter output is connected to a spectrum analyzer with the RBW set to 100KHz, the VBW $\geq 3 \times$ RBW, peak detector and max hold.

RESULTS

10.1.1. 802.11b MODE IN THE 2.4 GHz BAND

Channel	Frequency [MHz]	6 dB Bandwidth [MHz]	Minimum Limit [MHz]
Low	2412	9.571	0.5
Mid	2437	9.083	0.5
High	2462	9.092	0.5
Worst		9.083	0.5


10.1.2. 802.11g MODE IN THE 2.4 GHz BAND


Channel	Frequency [MHz]	6 dB Bandwidth [MHz]	Minimum Limit [MHz]
Low	2412	15.786	0.5
Mid	2437	15.620	0.5
High	2462	15.330	0.5
Worst		15.330	0.5


10.1.3. 802.11n HT20 MODE IN THE 2.4 GHz BAND

Channel	Frequency [MHz]	6 dB Bandwidth [MHz]	Minimum Limit [MHz]
Low	2412	16.548	0.5
Mid	2437	16.404	0.5
High	2462	16.430	0.5
Worst		16.404	0.5

10.1.4. 6 dB BANDWIDTH PLOTS

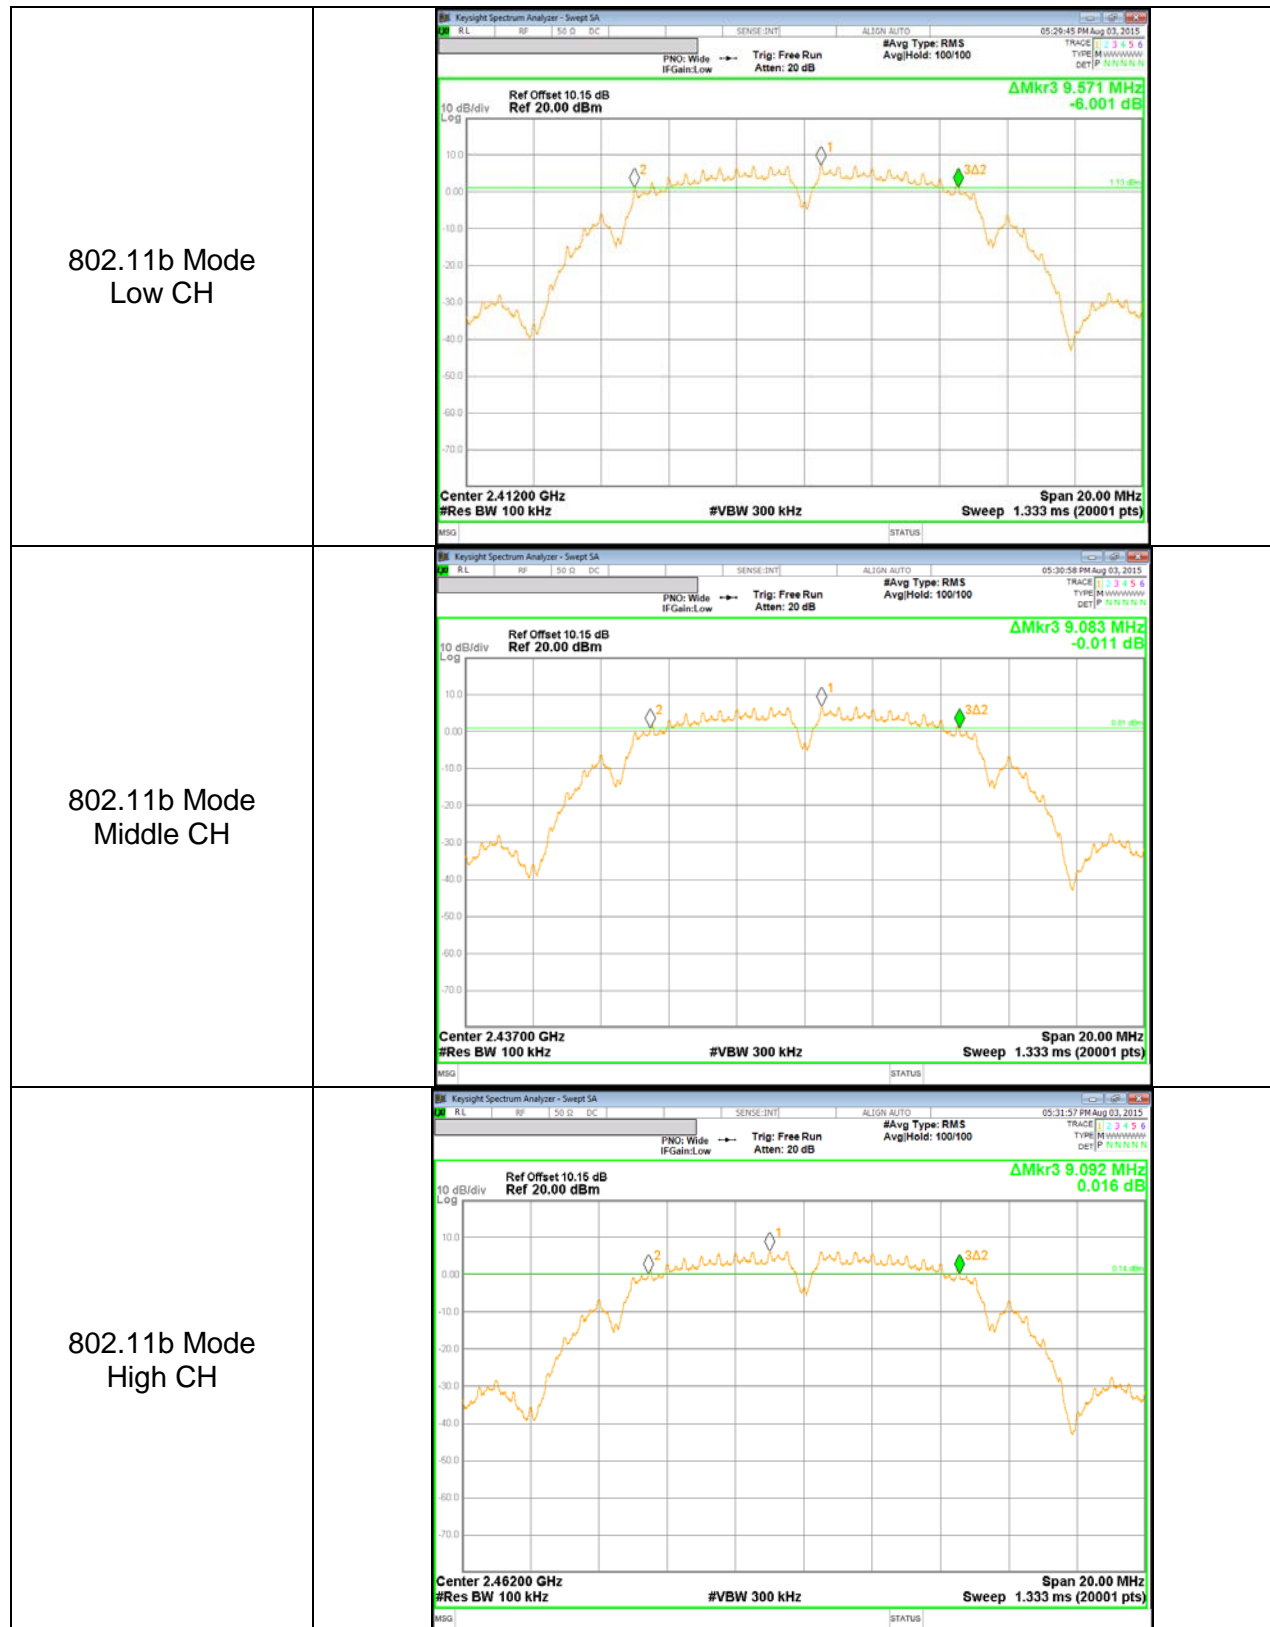

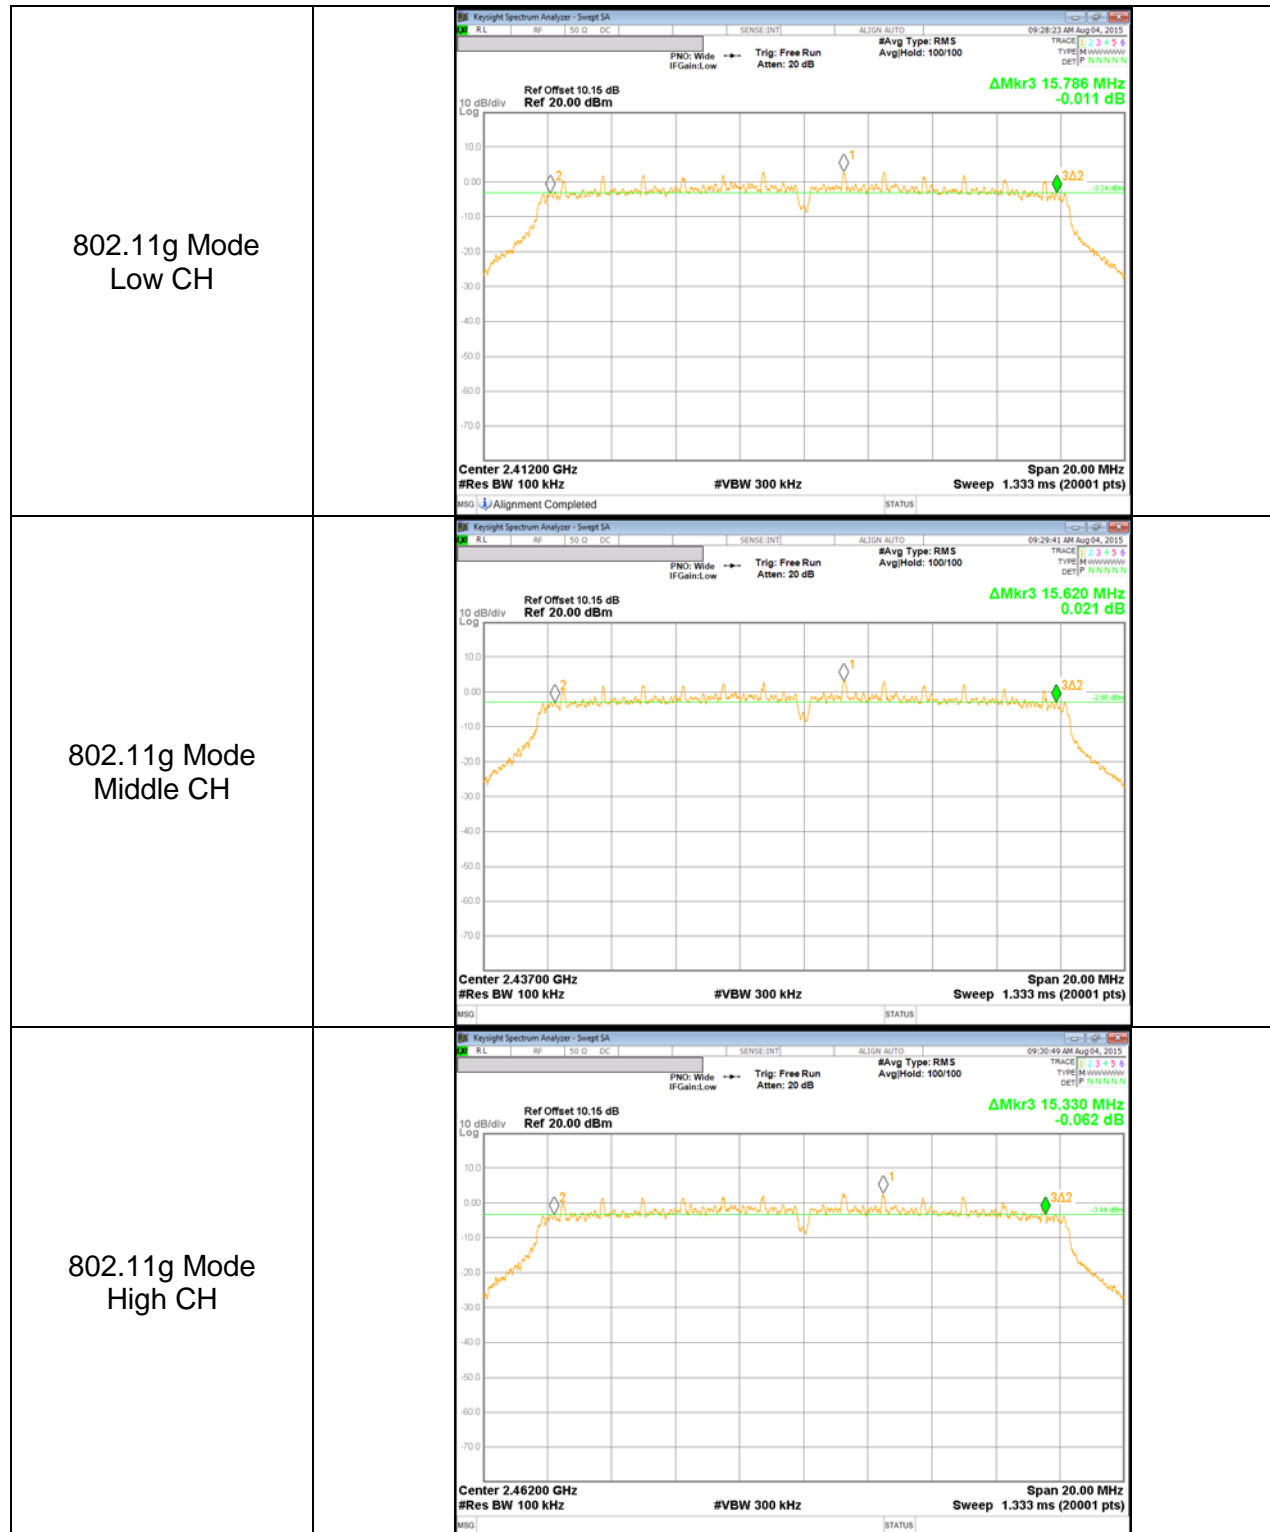

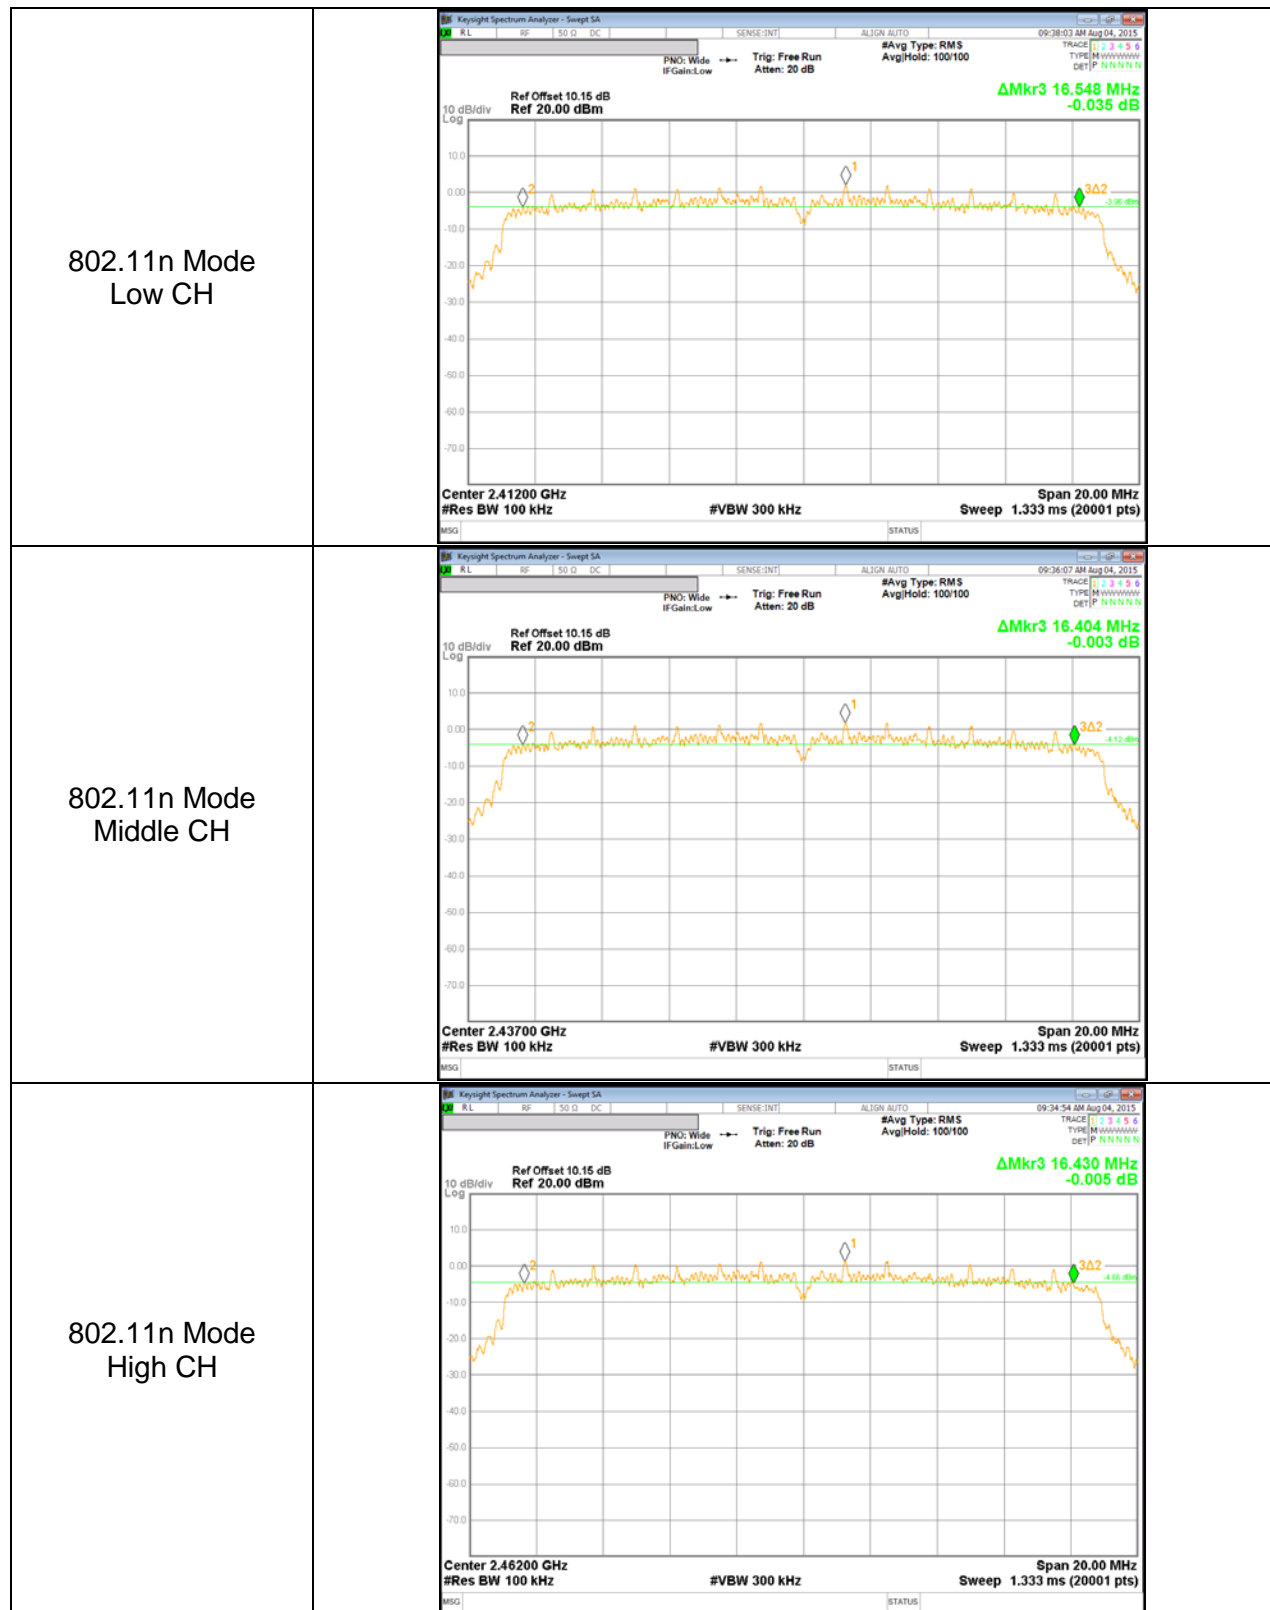

10.2. 99% BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

10.2.1. 802.11b MODE IN THE 2.4 GHz BAND

Channel	Frequency [MHz]	99% Bandwidth [MHz]
Low	2412	11.542
Mid	2437	11.542
High	2462	11.525
Worst		11.542

10.2.2. 802.11g MODE IN THE 2.4 GHz BAND

Channel	Frequency [MHz]	99% Bandwidth [MHz]
Low	2412	16.410
Mid	2437	16.417
High	2462	16.409
Worst		16.417

10.2.3. 802.11n HT20 MODE IN THE 2.4 GHz BAND

Channel	Frequency [MHz]	99% Bandwidth [MHz]
Low	2412	17.565
Mid	2437	17.564
High	2462	17.566
Worst		17.566

10.2.4. 99% BANDWIDTH PLOTS

<p>802.11b Mode Low CH</p>	<p>Center 2.412 GHz #Res BW 150 kHz #VBW 470 kHz Span 30 MHz #Sweep 100 ms</p> <p>Occupied Bandwidth 11.542 MHz</p> <p>Total Power 16.5 dBm Transmit Freq Error -66.957 kHz OBW Power 99.00 % x dB Bandwidth 14.10 MHz x dB -26.00 dB</p>
<p>802.11b Mode Middle CH</p>	<p>Center 2.437 GHz #Res BW 150 kHz #VBW 470 kHz Span 30 MHz #Sweep 100 ms</p> <p>Occupied Bandwidth 11.542 MHz</p> <p>Total Power 16.3 dBm Transmit Freq Error -69.897 kHz OBW Power 99.00 % x dB Bandwidth 14.11 MHz x dB -26.00 dB</p>
<p>802.11b Mode High CH</p>	<p>Center 2.462 GHz #Res BW 150 kHz #VBW 470 kHz Span 30 MHz #Sweep 100 ms</p> <p>Occupied Bandwidth 11.525 MHz</p> <p>Total Power 16.0 dBm Transmit Freq Error -71.499 kHz OBW Power 99.00 % x dB Bandwidth 14.06 MHz x dB -26.00 dB</p>