



**PCTEST ENGINEERING LABORATORY, INC.**  
 6660 – B Dobbin Road • Columbia, MD 21045 • USA  
 Telephone 410.290.6652 / Fax 410.290.6654  
<http://www.pctestlab.com> (email: [randy@pctestlab.com](mailto:randy@pctestlab.com))



## CERTIFICATE OF COMPLIANCE (SAR EVALUATION)

**APPLICANT NAME & ADDRESS:**

Samsung Electronics Co., Ltd.  
 416 Maetan-3 Dong, Paldal-Ku  
 Suwon City Kyungki-Do 441-742, KOREA  
 Attn: Wallace Oh

**DATE & LOCATION OF TESTING:**

Dates of Tests: Mar. 21-22, 27-28, & Apr. 8, 2002  
 Test Report S/N: SAR.220322121.A3L  
 Test Site: PCTEST Lab, Columbia, MD USA


<b>FCC ID:</b>	<b>A3LSPHA500</b>
<b>APPLICANT:</b>	<b>Samsung Electronics Co., Ltd.</b>

<b>EUT Type:</b>	Tri-Mode Dual-Band Analog/PCS Phone (AMPS/CDMA)
<b>Tx Frequency:</b>	824.04 – 848.97 MHz (AMPS) / 824.70 – 848.31 MHz (CDMA) 1851.25 – 1908.75 MHz (PCS CDMA)
<b>Rx Frequency:</b>	869.04 – 893.97 MHz (AMPS) / 869.70 – 893.31 MHz (CDMA) 1931.25 – 1988.75 MHz (PCS CDMA)
<b>Max. RF Output Power:</b>	0.319W ERP AMPS (25.033dBm) / 26.0 dBm Conducted 0.284W ERP Cellular CDMA (24.533dBm) / 25.5 dBm Conducted 0.355W EIRP PCS CDMA (25.501dBm) / 24.5 dBm Conducted
<b>Max. SAR Measurement:</b>	1.10W/kg AMPS Head SAR; 0.62W/kg AMPS Body SAR; 1.05W/kg Cell. CDMA Head SAR; 0.53W/kg Cell. CDMA Body SAR; 1.33W/kg PCS CDMA Head SAR; 0.34W/kg PCS CDMA Body SAR
<b>Trade Name/Model(s):</b>	<i>SPH-A500</i>
<b>FCC Classification:</b>	Licensed Portable Transmitter Held to Ear (PCE)
<b>FCC Rule Part(s):</b>	§2.1093; FCC/OET Bulletin 65 Supplement C [July 2001]
<b>Application Type:</b>	Certification
<b>Test Device Serial No.:</b>	<i>Identical prototype</i>



This wireless portable device has been shown to be capable of compliance for localized specific absorption rate (SAR) for uncontrolled environment/general population exposure limits specified in ANSI/IEEE Std. C95.1-1992 and had been tested in accordance with the measurement procedures specified in FCC/OET Bulletin 65 Supplement C (2001) and IEEE Std. 1528-200X (Draft 6.4, July 2001).

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

*PCTEST certifies that no party to this application has been denied the FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C. 862.*

  
 Randy Ortanez  
 President



PCTEST™ SAR TEST REPORT		FCC CERTIFICATION		Reviewed by: Quality Manager
SAR Filename: SAR.220322121.A3L	Test Dates: Mar. 21-22, 27-28, & Apr. 8, 2002	Phone Type: Tri-Mode Dual-Band	FCC ID: A3LSPHA500	Page 1 of 33

# 12. SYSTEM VERIFICATION

## Tissue Verification

**Table 12.1 Simulated Tissue Verification**



MEASURED TISSUE PARAMETERS									
Date(s)	3/15/2002	835MHz Brain		835MHz Muscle		1900MHz Brain		1900MHz Muscle	
Liquid Temperature (°C)	22.0	Target	Measured	Target	Measured	Target	Measured	Target	Measured
Dielectric Constant: $\epsilon$		41.50	43.44	55.20	55.54	40.00	40.29	53.30	53.95
Conductivity: $\sigma$		0.90	0.87	0.97	0.99	1.40	1.44	1.520	1.53

## Test System Validation

Prior to assessment, the system is verified to the  $\pm 10\%$  of the specifications at 835MHz and 1900MHz by using the system validation kit(s). (Graphic Plots Attached)

**Table 12.2 System Validation**

SYSTEM DIPOLE VALIDATION TARGET & MEASURED				
System Validation Kit: D-835S, S/N: 103	835MHz Brain	Targeted SAR <sub>1g</sub> (mW/g) 2.375	Measured SAR <sub>1g</sub> (mW/g) <span style="color: blue;">2.37</span>	Deviation (%) <span style="color: blue;">- 0.2</span>
System Validation Kit: D-1900S, S/N: 104	1900MH z Brain	Targeted SAR <sub>1g</sub> (mW/g) 9.925	Measured SAR <sub>1g</sub> (mW/g) <span style="color: blue;">10.41</span>	Deviation (%) <span style="color: blue;">+ 4.7</span>

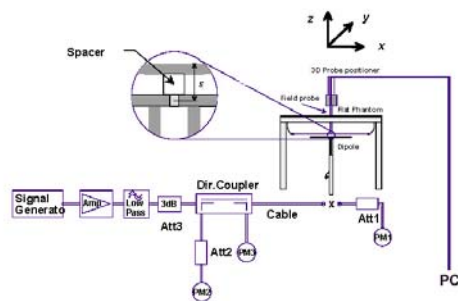

**Figure 12.1 Dipole Validation Test Setup**

PCTEST™ SAR TEST REPORT		FCC CERTIFICATION		Reviewed by: Quality Manager
SAR Filename: SAR.220322121.A3L	Test Dates: Mar. 21-22, 27-28, & Apr. 8, 2002	Phone Type: Tri-Mode Dual-Band	FCC ID: A3LSPHA500	Page 16 of 33

## 13. SAR TEST DATA SUMMARY

See Measurement Result Data Pages

### Procedures Used To Establish Test Signal

The handset was placed into simulated call mode (AMPS, Cellular CDMA & PCS CDMA modes) using manufacturers test codes. Such test signals offer a consistent means for testing SAR and are recommended for evaluating SAR [4]. When test modes are not available or inappropriate for testing a handset, the actual transmission is activated through a base station simulator or similar equipment. See data pages for actual procedure used in measurement.

### Device Test Conditions

The handset is battery operated. Each SAR measurement was taken with a fully charged battery. In order to verify that the device was tested at full power, conducted output power measurements were performed before and after each SAR measurement to confirm the output power. If a conducted power deviation of more than 5% occurred, the test was repeated.

### EUT Handset Reference Points

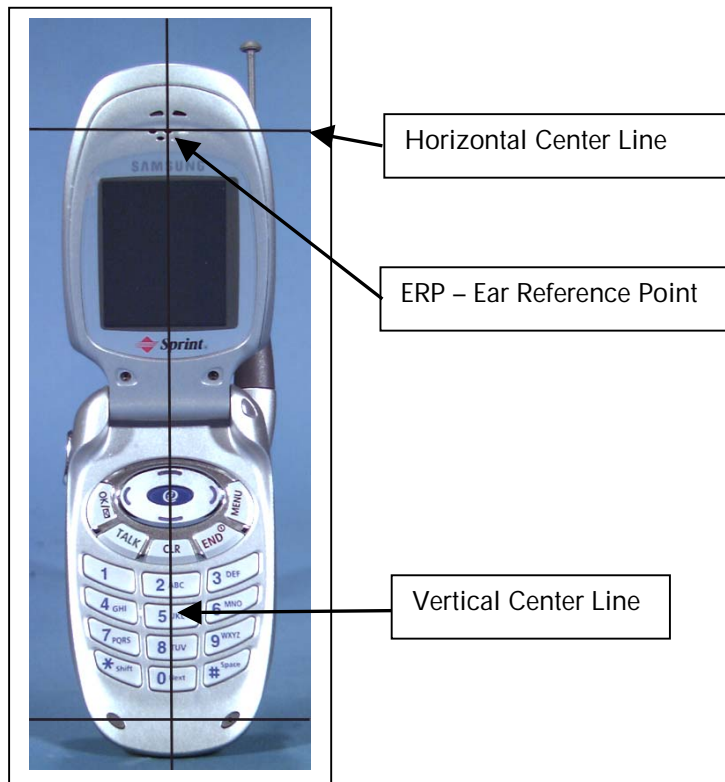


Figure 13.1 Handset Reference Points

PCTEST™ SAR TEST REPORT	PCTEST Engineering Laboratory, Inc.	FCC CERTIFICATION		Reviewed by: Quality Manager
SAR Filename: SAR.220322121.A3L	Test Dates: Mar. 21-22, 27-28, & Apr. 8, 2002	Phone Type: Tri-Mode Dual-Band	FCC ID: A3LSPHA500	Page 17 of 33

# SAR DATA SUMMARY

Mixture Type: 835MHz Brain

14.1 MEASUREMENT RESULTS (AMPS Right Head SAR – Touch)								
FREQUENCY		Modulation	Begin / End POWER <sup>†</sup>			Device Test Position	Antenna Position	SAR (W/kg)
MHz	Ch.		(dBm)		Battery			
824.04	0991	AMPS	26.0	26.0	Standard	Cheek / Touch	In	0.78
824.04	0991	AMPS	26.0	26.0	Standard	Cheek / Touch	Out	0.56
836.49	0383	AMPS	26.0	26.0	Standard	Cheek / Touch	In	1.03
836.49	0383	AMPS	26.0	26.0	Standard	Cheek / Touch	Out	0.86
848.97	0799	AMPS	26.0	26.0	Standard	Cheek / Touch	In	0.70
848.97	0799	AMPS	26.0	26.0	Standard	Cheek / Touch	Out	0.71
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population						Brain 1.6 W/kg (mW/g) averaged over 1 gram		



**NOTES:**

1. The test data reported are the worst-case SAR value with the antenna-head position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supp.C [July 2001].
  2. All modes of operation were investigated, and worst-case results are reported.
  3. Battery is fully charged for all readings. *Standard batteries are the only battery options.*
- |                           |  |   |  |
|---------------------------|--|---|--|
| †Power Measured           | <input checked="" type="checkbox"/> Conducted        | <input type="checkbox"/> ERP                    | <input type="checkbox"/> EIRP                  |
| 4. SAR Measurement System | <input type="checkbox"/> DASY3                       | <input checked="" type="checkbox"/> IDX         |  |
| Phantom Configuration     | <input type="checkbox"/> Left Head                   | <input type="checkbox"/> Flat Phantom           | <input checked="" type="checkbox"/> Right Head |
| 5. SAR Configuration      | <input checked="" type="checkbox"/> Head             | <input type="checkbox"/> Body                   | <input type="checkbox"/> Hand                  |
| 6. Test Signal Call Mode  | <input checked="" type="checkbox"/> Manu. Test Codes | <input type="checkbox"/> Base Station Simulator |  |
7. Tissue parameters and temperatures are listed on the SAR plots.
  8. Liquid tissue depth is 15.1 cm. ± 0.1

  
**Alfred Cirwithian**  
 Vice President Engineering



**Figure 14.1 Right Head SAR Test Setup  
-- Cheek / Touch Position --**

PCTEST™ SAR TEST REPORT	 <b>FCC CERTIFICATION</b>		Reviewed by: Quality Manager
SAR Filename: SAR.220322121.A3L	Test Dates: Mar. 21-22, 27-28, & Apr. 8, 2002	Phone Type: Tri-Mode Dual-Band	FCC ID: A3LSPHA500

# SAR DATA SUMMARY (Continued)

Mixture Type: 835MHz Brain

14.2 MEASUREMENT RESULTS (AMPS Right Head SAR – Tilt)								
FREQUENCY		Modulation	Begin / End POWER <sup>‡</sup>			Device Test Position	Antenna Position	SAR (W/kg)
MHz	Ch.		(dBm)		Battery			
836.49	0383	AMPS	26.0	26.0	Standard	Ear / 15° Tilt	In	0.23
836.49	0383	AMPS	26.0	26.0	Standard	Ear / 15° Tilt	Out	0.18
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population						Brain 1.6 W/kg (mW/g) averaged over 1 gram		



**NOTES:**

1. The test data reported are the worst-case SAR value with the antenna-head position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supp.C [July 2001].
  2. All modes of operation were investigated, and worst-case results are reported.
  3. Battery is fully charged for all readings. *Standard batteries are the only battery options.*
- |                           |  |   |  |
|---------------------------|--|---|--|
| *Power Measured           | <input checked="" type="checkbox"/> Conducted        | <input type="checkbox"/> ERP                    | <input type="checkbox"/> EIRP                  |
| 4. SAR Measurement System | <input type="checkbox"/> DASY3                       | <input checked="" type="checkbox"/> IDX         |  |
| Phantom Configuration     | <input type="checkbox"/> Left Head                   | <input type="checkbox"/> Flat Phantom           | <input checked="" type="checkbox"/> Right Head |
| 5. SAR Configuration      | <input checked="" type="checkbox"/> Head             | <input type="checkbox"/> Body                   | <input type="checkbox"/> Hand                  |
| 6. Test Signal Call Mode  | <input checked="" type="checkbox"/> Manu. Test Codes | <input type="checkbox"/> Base Station Simulator |  |
7. Tissue parameters and temperatures are listed on the SAR plots.
  8. Liquid tissue depth is 15.1 cm. ± 0.1
  9. Justification for reduced test configurations: Per FCC/OET Bulletin 65 Supplement C (July, 2001), if the SAR measured at the middle channel for each test configuration (left, right, cheek/touch, tile/ear, extended and retracted) is at least 2.0 dB lower than the SAR limit, testing at the high and low channels is optional for such test configuration(s).

  
**Alfred Cirwithian**  
 Vice President Engineering



**Figure 14.5 Right Head SAR Test Setup  
-- Ear / 15° Tilt Position --**

PCTEST™ SAR TEST REPORT	 <b>FCC CERTIFICATION</b>		Reviewed by: Quality Manager
SAR Filename: SAR.220322121.A3L	Test Dates: Mar. 21-22, 27-28, & Apr. 8, 2002	Phone Type: Tri-Mode Dual-Band	FCC ID: A3LSPHA500

## SAR DATA SUMMARY (Continued)

Mixture Type: 835MHz Brain

14.3 MEASUREMENT RESULTS (AMPS Left Head SAR - Touch)								
FREQUENCY		Modulation	Begin / End POWER <sup>‡</sup>			Device Test Position	Antenna Position	SAR (W/kg)
MHz	Ch.		(dBm)		Battery			
824.04	0991	AMPS	26.0	26.0	Standard	Cheek / Touch	In	1.10
824.04	0991	AMPS	26.0	26.0	Standard	Cheek / Touch	Out	0.57
836.49	0383	AMPS	26.0	26.0	Standard	Cheek / Touch	In	1.10
836.49	0383	AMPS	26.0	26.0	Standard	Cheek / Touch	Out	0.87
848.97	0799	AMPS	26.0	26.0	Standard	Cheek / Touch	In	0.91
848.97	0799	AMPS	26.0	26.0	Standard	Cheek / Touch	Out	0.78
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population						Brain 1.6 W/kg (mW/g) averaged over 1 gram		



**NOTES:**

- The test data reported are the worst-case SAR value with the antenna-head position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supp.C [July 2001].
  - All modes of operation were investigated, and worst-case results are reported.
  - Battery is fully charged for all readings. *Standard batteries are the only battery options.*
- <sup>‡</sup>Power Measured                       Conducted                       ERP                       EIRP
4. SAR Measurement System                       DASY3                       IDX
- Phantom Configuration                       Left Head                       Flat Phantom                       Right Head
5. SAR Configuration                       Head                       Body                       Hand
6. Test Signal Call Mode                       Manu. Test Codes                       Base Station Simulator
- Tissue parameters and temperatures are listed on the SAR plots.
  - Liquid tissue depth is 15.1 cm. ± 0.1

  
**Alfred Cirwithian**  
Vice President Engineering



Figure 14.3 Left Head SAR Test Setup  
-- Cheek / Touch Position --

PCTEST™ SAR TEST REPORT	 <b>FCC CERTIFICATION</b>		Reviewed by: Quality Manager
SAR Filename: SAR.220322121.A3L	Test Dates: Mar. 21-22, 27-28, & Apr. 8, 2002	Phone Type: Tri-Mode Dual-Band	FCC ID: A3LSPHA500
			Page 20 of 33

## SAR DATA SUMMARY (Continued)


Mixture Type: 835MHz Brain

14.4 MEASUREMENT RESULTS (AMPS Left Head SAR – Tilt)								
FREQUENCY		Modulation	Begin / End POWER <sup>†</sup>			Device Test Position	Antenna Position	SAR (W/kg)
MHz	Ch.		(dBm)		Battery			
836.49	0383	AMPS	26.0	26.0	Standard	Ear / 15° Tilt	In	0.22
836.49	0383	AMPS	26.0	26.0	Standard	Ear / 15° Tilt	Out	0.18
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population						Brain 1.6 W/kg (mW/g) averaged over 1 gram		



**NOTES:**

1. The test data reported are the worst-case SAR value with the antenna-head position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supp.C [July 2001].
  2. All modes of operation were investigated, and worst-case results are reported.
  3. Battery is fully charged for all readings. *Standard batteries are the only battery options.*
- |                           |  |   |                                     |
|---------------------------|--|---|-------------------------------------|
| †Power Measured           | <input checked="" type="checkbox"/> Conducted        | <input type="checkbox"/> ERP                    | <input type="checkbox"/> EIRP       |
| 4. SAR Measurement System | <input type="checkbox"/> DASY3                       | <input checked="" type="checkbox"/> IDX         |                                     |
| Phantom Configuration     | <input checked="" type="checkbox"/> Left Head        | <input type="checkbox"/> Flat Phantom           | <input type="checkbox"/> Right Head |
| 5. SAR Configuration      | <input checked="" type="checkbox"/> Head             | <input type="checkbox"/> Body                   | <input type="checkbox"/> Hand       |
| 6. Test Signal Call Mode  | <input checked="" type="checkbox"/> Manu. Test Codes | <input type="checkbox"/> Base Station Simulator |                                     |
7. Tissue parameters and temperatures are listed on the SAR plots.
  8. Liquid tissue depth is 15.1 cm. ± 0.1
  9. Justification for reduced test configurations: Per FCC/OET Bulletin 65 Supplement C (July, 2001), if the SAR measured at the middle channel for each test configuration (left, right, cheek/touch, tile/ear, extended and retracted) is at least 2.0 dB lower than the SAR limit, testing at the high and low channels is optional for such test configuration(s).

  
 Alfred Cirwithian  
 Vice President Engineering



**Figure 14.4 Left Head SAR Test Setup  
-- Ear / 15° Tilt Position --**

PCTEST™ SAR TEST REPORT	 <b>FCC CERTIFICATION</b>		Reviewed by: Quality Manager
SAR Filename: SAR.220322121.A3L	Test Dates: Mar. 21-22, 27-28, & Apr. 8, 2002	Phone Type: Tri-Mode Dual-Band	FCC ID: A3LSPHA500

## SAR DATA SUMMARY (Continued)

Mixture Type: 835MHz Brain

### 14.5 MEASUREMENT RESULTS (CELLULAR CDMA Left Head SAR – Touch)

FREQUENCY		Modulation	Begin / End POWER <sup>†</sup>			Device Test Position	Antenna Position	SAR (W/kg)
MHz	Ch.		(dBm)		Battery			
824.70	1013	CDMA	25.5	25.5	Standard	Cheek / Touch	In	0.60
824.70	1013	CDMA	25.5	25.5	Standard	Cheek / Touch	Out	0.44
836.49	383	CDMA	25.5	25.5	Standard	Cheek / Touch	In	1.05
836.49	383	CDMA	25.5	25.5	Standard	Cheek / Touch	Out	0.67
848.31	777	CDMA	25.5	25.5	Standard	Cheek / Touch	In	0.80
848.31	777	CDMA	25.5	25.5	Standard	Cheek / Touch	Out	0.71
<b>ANSI / IEEE C95.1 1992 - SAFETY LIMIT</b>						<b>Brain</b>		
<b>Spatial Peak</b>						<b>1.6 W/kg (mW/g)</b>		
<b>Uncontrolled Exposure/General Population</b>						averaged over 1 gram		

**NOTES:**



- The test data reported are the worst-case SAR value with the antenna-head position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supp.C [July 2001].
  - All modes of operation were investigated, and worst-case results are reported.
  - Battery is fully charged for all readings. *Standard batteries are the only battery options.*
- |                           |  |   |                                     |
|---------------------------|--|---|-------------------------------------|
| †Power Measured           | <input checked="" type="checkbox"/> Conducted        | <input type="checkbox"/> ERP                    | <input type="checkbox"/> EIRP       |
| 4. SAR Measurement System | <input type="checkbox"/> DASY3                       | <input checked="" type="checkbox"/> IDX         |                                     |
| Phantom Configuration     | <input checked="" type="checkbox"/> Left Head        | <input type="checkbox"/> Flat Phantom           | <input type="checkbox"/> Right Head |
| 5. SAR Configuration      | <input checked="" type="checkbox"/> Head             | <input type="checkbox"/> Body                   | <input type="checkbox"/> Hand       |
| 6. Test Signal Call Mode  | <input checked="" type="checkbox"/> Manu. Test Codes | <input type="checkbox"/> Base Station Simulator |                                     |
- Tissue parameters and temperatures are listed on the SAR plots.
  - Liquid tissue depth is 15.1 cm. ± 0.1



**Alfred Cirwithian**  
Vice President Engineering



**Figure 14.5 Left Head SAR Test Setup**  
-- Cheek / Touch Position --

PCTEST™ SAR TEST REPORT	 <b>FCC CERTIFICATION</b>		Reviewed by: Quality Manager
SAR Filename: SAR.220322121.A3L	Test Dates: Mar. 21-22, 27-28, & Apr. 8, 2002	Phone Type: Tri-Mode Dual-Band	FCC ID: A3LSPHA500
			Page 22 of 33

## SAR DATA SUMMARY (Continued)

Mixture Type: 835MHz Brain

### 14.6 MEASUREMENT RESULTS (CELLULAR CDMA Right Head SAR – Touch)

FREQUENCY		Modulation	Begin / End POWER <sup>‡</sup>			Device Test Position	Antenna Position	SAR (W/kg)
MHz	Ch.		(dBm)	Battery				
824.70	1013	CDMA	25.5	25.5	Standard	Cheek / Touch	In	0.59
824.70	1013	CDMA	25.5	25.5	Standard	Cheek / Touch	Out	0.38
836.49	383	CDMA	25.5	25.5	Standard	Cheek / Touch	In	0.92
836.49	383	CDMA	25.5	25.5	Standard	Cheek / Touch	Out	0.61
848.31	777	CDMA	25.5	25.5	Standard	Cheek / Touch	In	0.64
848.31	777	CDMA	25.5	25.5	Standard	Cheek / Touch	Out	0.58
<b>ANSI / IEEE C95.1 1992 - SAFETY LIMIT</b> <b>Spatial Peak</b> <b>Uncontrolled Exposure/General Population</b>						<b>Brain</b> <b>1.6 W/kg (mW/g)</b> averaged over 1 gram		

**NOTES:**



- The test data reported are the worst-case SAR value with the antenna-head position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supp.C [July 2001].
  - All modes of operation were investigated, and worst-case results are reported.
  - Battery is fully charged for all readings. *Standard batteries are the only battery options.*
- |                             |  |   |  |
|-----------------------------|--|---|--|
| <sup>‡</sup> Power Measured | <input checked="" type="checkbox"/> Conducted        | <input type="checkbox"/> ERP                    | <input type="checkbox"/> EIRP                  |
| 4. SAR Measurement System   | <input type="checkbox"/> DASY3                       | <input checked="" type="checkbox"/> IDX         |  |
| Phantom Configuration       | <input type="checkbox"/> Left Head                   | <input type="checkbox"/> Flat Phantom           | <input checked="" type="checkbox"/> Right Head |
| 5. SAR Configuration        | <input checked="" type="checkbox"/> Head             | <input type="checkbox"/> Body                   | <input type="checkbox"/> Hand                  |
| 6. Test Signal Call Mode    | <input checked="" type="checkbox"/> Manu. Test Codes | <input type="checkbox"/> Base Station Simulator |  |
- Tissue parameters and temperatures are listed on the SAR plots.
  - Liquid tissue depth is 15.1 cm. ± 0.1



**Alfred Cirwithian**  
Vice President Engineering



**Figure 14.6 Right Head SAR Test Setup**  
-- Cheek / Touch Position --

PCTEST™ SAR TEST REPORT	 <b>FCC CERTIFICATION</b>		Reviewed by: Quality Manager
SAR Filename: SAR.220322121.A3L	Test Dates: Mar. 21-22, 27-28, & Apr. 8, 2002	Phone Type: Tri-Mode Dual-Band	FCC ID: A3LSPHA500
			Page 23 of 33

## SAR DATA SUMMARY (Continued)


Mixture Type: 1900MHz Brain

### 14.7 MEASUREMENT RESULTS (PCS CDMA Right Head SAR – Touch)

FREQUENCY		Modulation	Begin / End POWER <sup>‡</sup>		Device Test Position	Antenna Position	SAR (W/kg)	
MHz	Ch.		(dBm)	Battery				
1851.25	0025	PCS CDMA	24.5	24.5	Standard	Cheek / Touch	In	1.16
1851.25	0025	PCS CDMA	24.5	24.5	Standard	Cheek / Touch	Out	0.25
1880.00	0600	PCS CDMA	24.5	24.5	Standard	Cheek / Touch	In	1.30
1880.00	0600	PCS CDMA	24.5	24.5	Standard	Cheek / Touch	Out	0.36
1908.75	1175	PCS CDMA	24.5	24.5	Standard	Cheek / Touch	In	1.19
1908.75	1175	PCS CDMA	24.5	24.5	Standard	Cheek / Touch	Out	0.27
<b>ANSI / IEEE C95.1 1992 - SAFETY LIMIT</b>						<b>Brain</b>		
<b>Spatial Peak</b>						<b>1.6 W/kg (mW/g)</b>		
<b>Uncontrolled Exposure/General Population</b>						averaged over 1 gram		

**NOTES:**



- The test data reported are the worst-case SAR value with the antenna-head position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supp.C [July 2001].
  - All modes of operation were investigated, and worst-case results are reported.
  - Battery is fully charged for all readings. *Standard batteries are the only battery options.*
- <sup>‡</sup>Power Measured                       Conducted                       ERP                       EIRP
4. SAR Measurement System                       DASY3                       IDX
- Phantom Configuration                       Left Head                       Flat Phantom                       Right Head
5. SAR Configuration                       Head                       Body                       Hand
6. Test Signal Call Mode                       Manu. Test Codes                       Base Station Simulator
- Tissue parameters and temperatures are listed on the SAR plots.
  - Liquid tissue depth is 15.1 cm. ± 0.1



**Alfred Cirwithian**  
Vice President Engineering



**Figure 14.7 Right Head SAR Test Setup**  
-- Cheek / Touch Position --

PCTEST™ SAR TEST REPORT	 <b>FCC CERTIFICATION</b>		Reviewed by: Quality Manager
SAR Filename: SAR.220322121.A3L	Test Dates: Mar. 21-22, 27-28, & Apr. 8, 2002	Phone Type: Tri-Mode Dual-Band	FCC ID: A3LSPHA500
			Page 24 of 33

## SAR DATA SUMMARY (Continued)


Mixture Type: 1900MHz Brain

### 14.8 MEASUREMENT RESULTS (PCS CDMA Left Head SAR – Touch)

FREQUENCY		Modulation	Begin / End POWER <sup>‡</sup>			Device Test Position	Antenna Position	SAR (W/kg)
MHz	Ch.		(dBm)	Battery				
1851.25	0025	PCS CDMA	24.5	24.5	Standard	Cheek / Touch	In	1.28
1851.25	0025	PCS CDMA	24.5	24.5	Standard	Cheek / Touch	Out	0.26
1880.00	0600	PCS CDMA	24.5	24.5	Standard	Cheek / Touch	In	1.33
1880.00	0600	PCS CDMA	24.5	24.5	Standard	Cheek / Touch	Out	0.44
1908.75	1175	PCS CDMA	24.5	24.5	Standard	Cheek / Touch	In	1.24
1908.75	1175	PCS CDMA	24.5	24.5	Standard	Cheek / Touch	Out	0.23
<b>ANSI / IEEE C95.1 1992 - SAFETY LIMIT</b>						<b>Brain</b>		
<b>Spatial Peak</b>						<b>1.6 W/kg (mW/g)</b>		
<b>Uncontrolled Exposure/General Population</b>						averaged over 1 gram		

**NOTES:**



- The test data reported are the worst-case SAR value with the antenna-head position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supp.C [July 2001].
  - All modes of operation were investigated, and worst-case results are reported.
  - Battery is fully charged for all readings. *Standard batteries are the only battery options.*
- \*Power Measured                       Conducted                       ERP                       EIRP
4. SAR Measurement System                       DASY3                       IDX
- Phantom Configuration                       Left Head                       Flat Phantom                       Right Head
5. SAR Configuration                       Head                       Body                       Hand
6. Test Signal Call Mode                       Manu. Test Codes                       Base Station Simulator
- Tissue parameters and temperatures are listed on the SAR plots.
  - Liquid tissue depth is 15.1 cm. ± 0.1



**Alfred Cirwithian**  
Vice President Engineering



**Figure 14.8 Left Head SAR Test Setup**  
-- Cheek / Touch Position --

PCTEST™ SAR TEST REPORT	 <b>FCC CERTIFICATION</b>		Reviewed by: Quality Manager
SAR Filename: SAR.220322121.A3L	Test Dates: Mar. 21-22, 27-28, & Apr. 8, 2002	Phone Type: Tri-Mode Dual-Band	FCC ID: A3LSPHA500
			Page 25 of 33

## SAR DATA SUMMARY (Continued)

Mixture Type: 1900MHz Brain

### 14.9 MEASUREMENT RESULTS (PCS CDMA Left Head SAR – Tilt)

FREQUENCY		Modulation	Begin / End POWER <sup>†</sup>		Device Test Position	Antenna Position	SAR (W/kg)	
MHz	Ch.		(dBm)	Battery				
1880.00	0600	PCS CDMA	24.5	24.5	Standard	Ear / 15° Tilt	In	0.21
1880.00	0600	PCS CDMA	24.5	24.5	Standard	Ear / 15° Tilt	Out	0.05
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population						Brain 1.6 W/kg (mW/g) averaged over 1 gram		



**NOTES:**

- The test data reported are the worst-case SAR value with the antenna-head position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supp.C [July 2001].
  - All modes of operation were investigated, and worst-case results are reported.
  - Battery is fully charged for all readings. *Standard batteries are the only battery options.*
- <sup>†</sup>Power Measured                     Conducted                     ERP                     EIRP  
 4. SAR Measurement System                     DASY3                     IDX  
 Phantom Configuration                     Left Head                     Flat Phantom                     Right Head  
 5. SAR Configuration                     Head                     Body                     Hand  
 6. Test Signal Call Mode                     Manu. Test Codes                     Base Station Simulator
- Tissue parameters and temperatures are listed on the SAR plots.
  - Liquid tissue depth is 15.1 cm. ± 0.1
  - Justification for reduced test configurations: Per FCC/OET Bulletin 65 Supplement C (July, 2001), if the SAR measured at the middle channel for each test configuration (left, right, cheek/touch, tile/ear, extended and retracted) is at least 2.0 dB lower than the SAR limit, testing at the high and low channels is optional for such test configuration(s).

  
**Alfred Cirwithian**  
 Vice President Engineering



Figure 14.9 Left Head SAR Test Setup  
-- Ear / Tilt Position --

PCTEST™ SAR TEST REPORT	 <b>FCC CERTIFICATION</b>		Reviewed by: Quality Manager
SAR Filename: SAR.220322121.A3L	Test Dates: Mar. 21-22, 27-28, & Apr. 8, 2002	Phone Type: Tri-Mode Dual-Band	FCC ID: A3LSPHA500
			Page 26 of 33

# SAR DATA SUMMARY (Continued)

Mixture Type: 1900MHz Brain

14.10 MEASUREMENT RESULTS (PCS Right Head SAR – Tilt)								
FREQUENCY		Modulation	Begin / End POWER <sup>‡</sup>			Device Test Position	Antenna Position	SAR (W/kg)
MHz	Ch.		(dBm)		Battery			
1880.00	600	PCS CDMA	26.0	26.0	Standard	Ear / 15° Tilt	In	0.18
1880.00	600	PCS CDMA	26.0	26.0	Standard	Ear / 15° Tilt	Out	0.06
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population						Brain 1.6 W/kg (mW/g) averaged over 1 gram		



**NOTES:**

1. The test data reported are the worst-case SAR value with the antenna-head position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supp.C [July 2001].
  2. All modes of operation were investigated, and worst-case results are reported.
  3. Battery is fully charged for all readings. *Standard batteries are the only battery options.*
- |                             |  |   |  |
|-----------------------------|--|---|--|
| <sup>‡</sup> Power Measured | <input checked="" type="checkbox"/> Conducted        | <input type="checkbox"/> ERP                    | <input type="checkbox"/> EIRP                  |
| 4. SAR Measurement System   | <input type="checkbox"/> DASY3                       | <input checked="" type="checkbox"/> IDX         |  |
| Phantom Configuration       | <input type="checkbox"/> Left Head                   | <input type="checkbox"/> Flat Phantom           | <input checked="" type="checkbox"/> Right Head |
| 5. SAR Configuration        | <input checked="" type="checkbox"/> Head             | <input type="checkbox"/> Body                   | <input type="checkbox"/> Hand                  |
| 6. Test Signal Call Mode    | <input checked="" type="checkbox"/> Manu. Test Codes | <input type="checkbox"/> Base Station Simulator |  |
7. Tissue parameters and temperatures are listed on the SAR plots.
  8. Liquid tissue depth is 15.1 cm. ± 0.1
  9. Justification for reduced test configurations: Per FCC/OET Bulletin 65 Supplement C (July, 2001), if the SAR measured at the middle channel for each test configuration (left, right, cheek/touch, tile/ear, extended and retracted) is at least 2.0 dB lower than the SAR limit, testing at the high and low channels is optional for such test configuration(s).

  
**Alfred Cirwithian**  
 Vice President Engineering



**Figure 14.10 Right Head SAR Test Setup  
-- Ear / 15° Tilt Position --**

PCTEST™ SAR TEST REPORT	 <b>FCC CERTIFICATION</b>		Reviewed by: Quality Manager
SAR Filename: SAR.220322121.A3L	Test Dates: Mar. 21-22, 27-28, & Apr. 8, 2002	Phone Type: Tri-Mode Dual-Band	FCC ID: A3LSPHA500

# SAR DATA SUMMARY (Continued)

Mixture Type: 835MHz Muscle

14.11 MEASUREMENT RESULTS (AMPS Body SAR w/o Holster)								
FREQUENCY		Modulation	Begin / End POWER <sup>†</sup>			Separation Distance (cm) <sup>††</sup>	Antenna Position	SAR (W/kg)
MHz	Ch.		(dBm)		Battery			
824.04	0991	AMPS	26.0	26.0	Standard	1.5 [w/o Holster]	In	0.44
824.04	0991	AMPS	26.0	26.0	Standard	1.5 [w/o Holster]	Out	0.44
836.49	0383	AMPS	26.0	26.0	Standard	1.5 [w/o Holster]	In	0.62
836.49	0383	AMPS	26.0	26.0	Standard	1.5 [w/o Holster]	Out	0.47
848.97	0799	AMPS	26.0	26.0	Standard	1.5 [w/o Holster]	In	0.48
848.97	0799	AMPS	26.0	26.0	Standard	1.5 [w/o Holster]	Out	0.42
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population						Muscle 1.6 W/kg (mW/g) averaged over 1 gram		



**NOTES:**

1. The test data reported are the worst-case SAR value with the antenna-head position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supp.C [July 2001].
  2. All modes of operation were investigated, and worst-case results are reported.
  3. Battery is fully charged for all readings. *Standard batteries are the only battery options.*
- |                           |  |   |                                     |
|---------------------------|--|---|-------------------------------------|
| †Power Measured           | <input checked="" type="checkbox"/> Conducted        | <input type="checkbox"/> ERP                        | <input type="checkbox"/> EIRP       |
| 4. SAR Measurement System | <input type="checkbox"/> DASY3                       | <input checked="" type="checkbox"/> IDX             |                                     |
| Phantom Configuration     | <input type="checkbox"/> Left Head                   | <input checked="" type="checkbox"/> Flat Phantom    | <input type="checkbox"/> Right Head |
| 5. SAR Configuration      | <input type="checkbox"/> Head                        | <input checked="" type="checkbox"/> Body            | <input type="checkbox"/> Hand       |
| 6. Test Signal Call Mode  | <input checked="" type="checkbox"/> Manu. Test Codes | <input type="checkbox"/> Base Station Simulator     |                                     |
| 7. ††Test Configuration   | <input type="checkbox"/> With Holster                | <input checked="" type="checkbox"/> Without Holster |                                     |
8. Tissue parameters and temperatures are listed on the SAR plots.
  9. Both sides of the phone were tested and the worst-case side is reported.
  10. Liquid tissue depth is 15.1 cm. ± 0.1

  
**Alfred Cirwithian**  
 Vice President Engineering



**Figure 14.11 Body SAR Test Setup  
-- w/o Holster --**

PCTEST™ SAR TEST REPORT	 <b>FCC CERTIFICATION</b>		Reviewed by: Quality Manager
SAR Filename: SAR.220322121.A3L	Test Dates: Mar. 21-22, 27-28, & Apr. 8, 2002	Phone Type: Tri-Mode Dual-Band	FCC ID: A3LSPHA500

## SAR DATA SUMMARY (Continued)

Mixture Type: 835MHz Muscle

### 14.12 MEASUREMENT RESULTS (CELLULAR CDMA Body SAR w/o Holster)

FREQUENCY		Modulation	Begin / End POWER <sup>†</sup>			Separation Distance (cm) <sup>††</sup>	Antenna Position	SAR (W/kg)
MHz	Ch.		(dBm)		Battery			
836.49	0383	CDMA	25.5	25.5	Standard	1.5 [w/o Holster]	In	0.53
836.49	0383	CDMA	25.5	25.5	Standard	1.5 [w/o Holster]	Out	0.40
<b>ANSI / IEEE C95.1 1992 - SAFETY LIMIT</b>						<b>Muscle</b>		
<b>Spatial Peak</b>						<b>1.6 W/kg (mW/g)</b>		
<b>Uncontrolled Exposure/General Population</b>						averaged over 1 gram		



**NOTES:**

- The test data reported are the worst-case SAR value with the antenna-head position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supp.C [July 2001].
  - All modes of operation were investigated, and worst-case results are reported.
  - Battery is fully charged for all readings. *Standard batteries are the only battery options.*
- |                                     |  |   |                                     |
|-------------------------------------|--|---|-------------------------------------|
| <sup>†</sup> Power Measured         | <input checked="" type="checkbox"/> Conducted        | <input type="checkbox"/> ERP                        | <input type="checkbox"/> EIRP       |
| 4. SAR Measurement System           | <input type="checkbox"/> DASY3                       | <input checked="" type="checkbox"/> IDX             |                                     |
| Phantom Configuration               | <input type="checkbox"/> Left Head                   | <input checked="" type="checkbox"/> Flat Phantom    | <input type="checkbox"/> Right Head |
| 5. SAR Configuration                | <input type="checkbox"/> Head                        | <input checked="" type="checkbox"/> Body            | <input type="checkbox"/> Hand       |
| 6. Test Signal Call Mode            | <input checked="" type="checkbox"/> Manu. Test Codes | <input type="checkbox"/> Base Station Simulator     |                                     |
| 7. <sup>††</sup> Test Configuration | <input type="checkbox"/> With Holster                | <input checked="" type="checkbox"/> Without Holster |                                     |
- Tissue parameters and temperatures are listed on the SAR plots.
  - Both sides of the phone were tested and the worst-case side is reported.
  - Liquid tissue depth is 15.1 cm. ± 0.1
  - Justification for reduced test configurations: Per FCC/OET Bulletin 65 Supplement C (July, 2001), if the SAR measured at the middle channel for each test configuration (left, right, cheek/touch, tile/ear, extended and retracted) is at least 2.0 dB lower than the SAR limit, testing at the high and low channels is optional for such test configuration(s).

  
**Alfred Cirwithian**  
Vice President Engineering



Figure 14.12 Body SAR Test Setup  
-- w/o Holster --

PCTEST™ SAR TEST REPORT	 <b>FCC CERTIFICATION</b>		Reviewed by: Quality Manager
SAR Filename: SAR.220322121.A3L	Test Dates: Mar. 21-22, 27-28, & Apr. 8, 2002	Phone Type: Tri-Mode Dual-Band	FCC ID: A3LSPHA500
			Page 29 of 33

## SAR DATA SUMMARY (Continued)

Mixture Type: 1900MHz Muscle

### 14.13 MEASUREMENT RESULTS (PCS CDMA Body SAR w/o Holster)

FREQUENCY		Modulation	Begin / End POWER <sup>†</sup>			Separation Distance (cm) <sup>**</sup>	Antenna Position	SAR (W/kg)
MHz	Ch.		(dBm)		Battery			
1851.25	0025	PCS CDMA	24.5	24.5	Standard	1.5 [w/o Holster]	In	0.21
1851.25	0025	PCS CDMA	24.5	24.5	Standard	1.5 [w/o Holster]	Out	0.12
1880.00	0600	PCS CDMA	24.5	24.5	Standard	1.5 [w/o Holster]	In	0.32
1880.00	0600	PCS CDMA	24.5	24.5	Standard	1.5 [w/o Holster]	Out	0.05
1908.75	1175	PCS CDMA	24.5	24.5	Standard	1.5 [w/o Holster]	In	0.34
1908.75	1175	PCS CDMA	24.5	24.5	Standard	1.5 [w/o Holster]	Out	0.28
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population						Muscle 1.6 W/kg (mW/g) averaged over 1 gram		



**NOTES:**

- The test data reported are the worst-case SAR value with the antenna-head position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supp.C [July 2001].
  - All modes of operation were investigated, and worst-case results are reported.
  - Battery is fully charged for all readings. *Standard batteries are the only battery options.*
- <sup>†</sup>Power Measured                     Conducted                     ERP                     EIRP  
 SAR Measurement System                     DASY3                     IDX  
 Phantom Configuration                     Left Head                     Flat Phantom                     Right Head  
 SAR Configuration                     Head                     Body                     Hand  
 Test Signal Call Mode                     Manu. Test Codes                     Base Station Simulator  
 <sup>\*\*</sup>Test Configuration                     With Holster                     Without Holster
- Tissue parameters and temperatures are listed on the SAR plots.
  - Both sides of the phone were tested and the worst-case side is reported.
  - Liquid tissue depth is 15.1 cm. ± 0.1

  
**Alfred Cirwithian**  
 Vice President Engineering



Figure 14.13 Body SAR Test Setup  
-- w/o Holster --

PCTEST™ SAR TEST REPORT	 <b>FCC CERTIFICATION</b>		Reviewed by: Quality Manager
SAR Filename: SAR.220322121.A3L	Test Dates: Mar. 21-22, 27-28, & Apr. 8, 2002	Phone Type: Tri-Mode Dual-Band	FCC ID: A3LSPHA500
			Page 30 of 33

## 15. SAR TEST EQUIPMENT



### Equipment Calibration

Table 15.1 Test Equipment Calibration

EQUIPMENT SPECIFICATIONS		
Type	Calibration Date	Serial Number
CRS Robot F3	February 2002	RAF0134133
CRS C500C Motion Controller	February 2002	RCB0003303
CRS Teach Pendant (Joystick)	February 2002	STP0132231
DELL Computer, Pentium 4 1.6 GHz, Windows 2000™	February 2002	
E-Field Probe E-010	February 2002	PCT002
Right Ear SAM Phantom (P-SAM-R)	February 2002	
Left Ear SAM Phantom (P-SAM-L)	February 2002	
IDX Robot End Effector (EE-103-C)	February 2002	07111223
IDX Probe Amplifier	February 2002	07111113
Validation Dipole D-835S	February 2002	PCT640
Validation Dipole D-1900S	February 2002	PCT639
Brain Equivalent Matter (835MHz)	April 2002	PCTBEM101
Brain Equivalent Matter (1900MHz)	April 2002	PCTBEM301
Muscle Equivalent Matter (835MHz)	April 2002	PCTMEM201
Muscle Equivalent Matter (1900MHz)	April 2002	PCTMEM401
Microwave Amp. Model: 5S1G4, (800MHz - 4.2GHz)	January 2002	22332
Gigatronics 8651A Power Meter	January 2002	1835299
HP-8648D (9kHz ~ 4GHz) Signal Generator	January 2002	PCT530
Amplifier Research 5S1G4 Power Amp	January 2002	PCT540
HP-8753E (30kHz ~ 3GHz) Network Analyzer	January 2002	PCT552
HP85070B Dielectric Probe Kit	January 2002	PCT501
Ambient Noise/Reflection, etc.	<12mW/kg/<3%of SAR	January 2002

NOTE:

The E-field probe was calibrated by IDX, by temperature measurement procedure. Dipole Validation measurement is performed by PCTEST Lab. before each test. The brain simulating material is calibrated by PCTEST using the dielectric probe system and network analyzer to determine the conductivity and permittivity (dielectric constant) of the brain-equivalent material.

PCTEST™ SAR TEST REPORT	 <b>FCC CERTIFICATION</b>		Reviewed by: Quality Manager
SAR Filename: SAR.220322121.A3L	Test Dates: Mar. 21-22, 27-28, & Apr. 8, 2002	Phone Type: Tri-Mode Dual-Band	FCC ID: A3LSPHA500
			Page 31 of 33

SAR Data Report 02032218

Start : 22-Mar-02 06:12:35 pm  
End : 22-Mar-02 06:28:43 pm  
Code Version : 4.08  
Robot Version: 4.08

Product Data:

Type : SAMSUNG  
Model Number : SPH-A500  
Serial Number : 2  
Frequency : 836.49 MHz  
Transmit Pwr : 0.400 W  
Antenna Type : Helical  
Antenna Posn. : In

Measurement Data:

Phantom Name : SAM-R  
Phantom Type : Right Ear  
Tissue Type : Brain  
Tissue Dielectric : 43.440  
Tissue Conductivity : 0.870  
Tissue Density : 1.000  
Robot Name : CRS

Probe Data:

Probe Name : PCT002  
Probe Type : E Fld Triangle  
Frequency : 835 MHz  
Tissue Type : Brain  
Calibrated Dielectric : 40.700  
Calibrated Conductivity : 0.890  
Calibrated Density : 1.000  
Probe Offset : 2.400 mm  
Conversion Factor : 5.800  
Probe Sensitivity : 3.597 3.474 3.049 mV/(mW/cm^2)  
Amplifier Gains : 20.00 20.00 20.00

Sample:

Rate: 6000 Samples/Sec  
Count: 100 Samples  
NIDAQ Gain: 5

Comments:

AMPS Mode CH-383  
Cheek  
CF=1; Amb. Temp= 21.1 'C; Liq. Temp=20.9 'C


Area Scan - Max Peak SAR Value at x=82.0 y=13.0 = 0.92 W/kg

Zoom Scan - Max Peak SAR Value at x=77.0 y=13.0 z=0.0 = 1.43 W/kg


Max 1g SAR at x=76.0 y=14.0 z=0.0 = 1.03 W/kg


Max 10g SAR at x=77.0 y=14.0 z=0.0 = 0.68 W/kg

SAR - Z Axis  
at Hotspot x:77.0 y:13.0

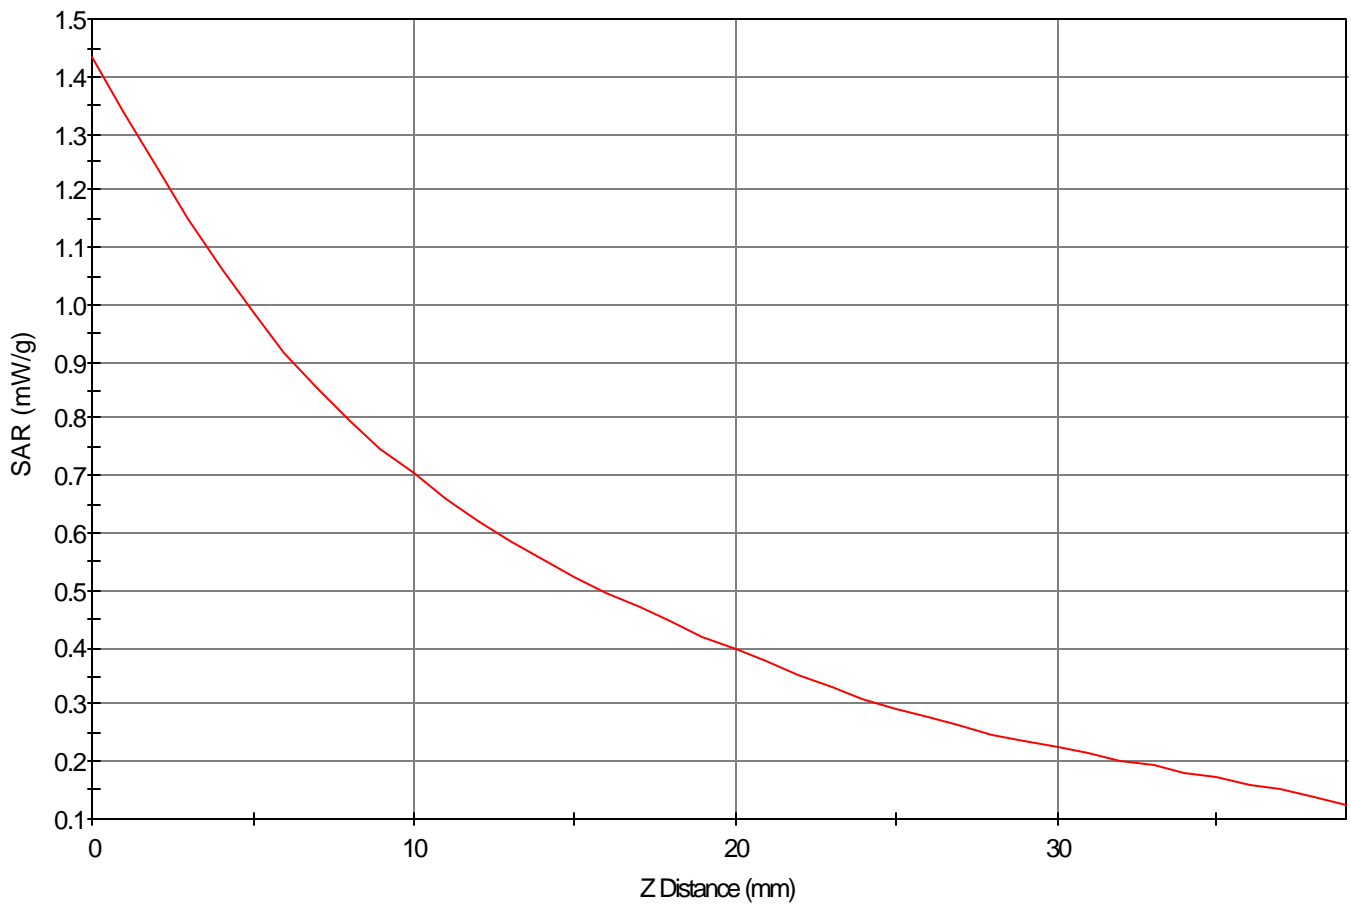

### 1g SAR Values

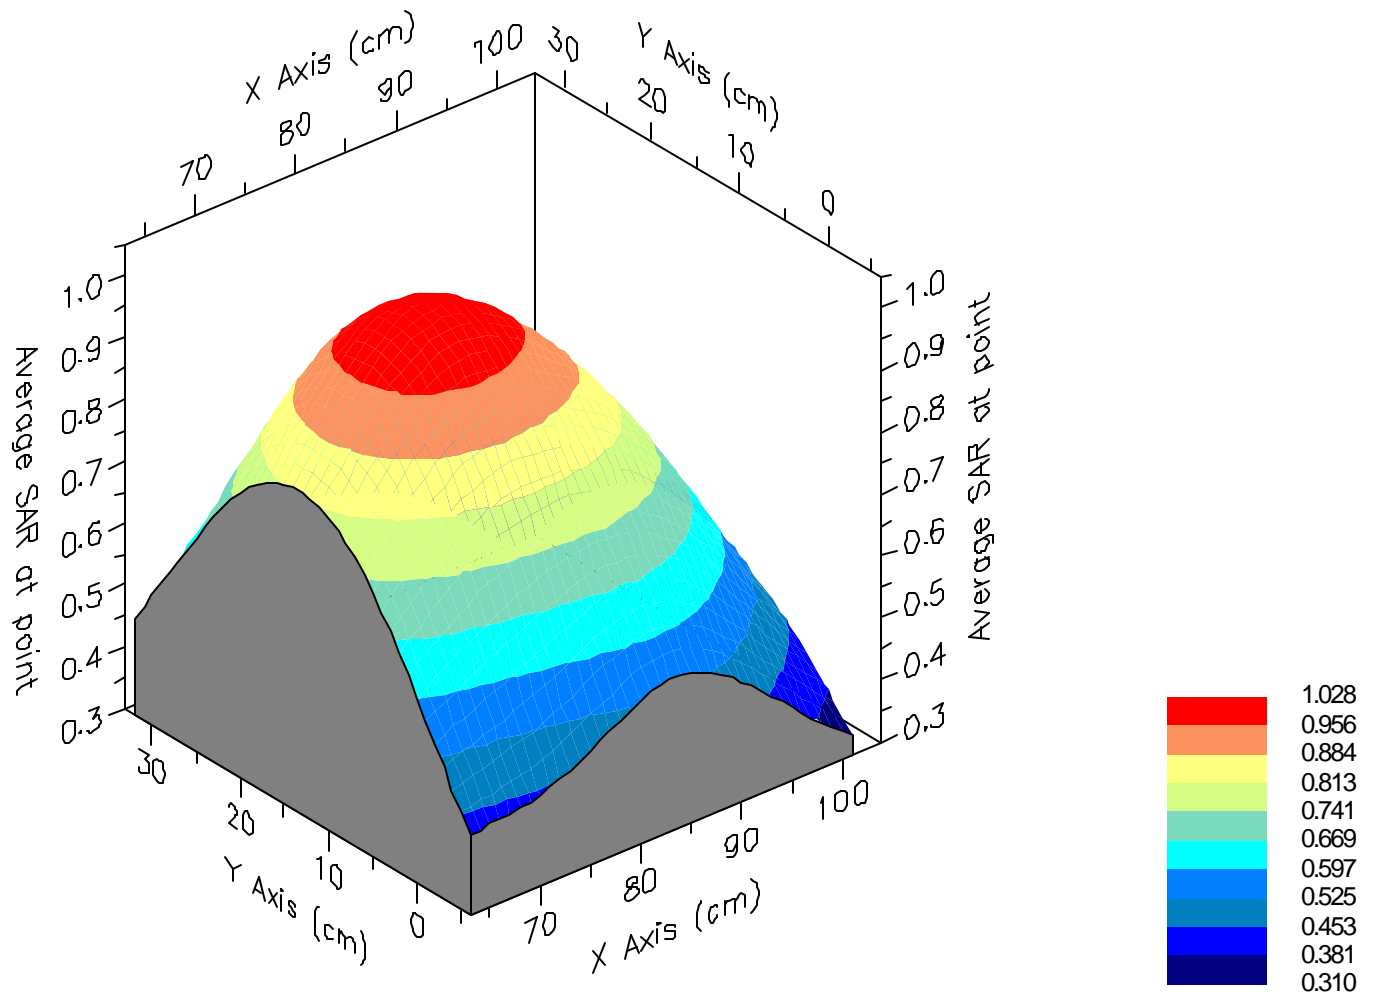

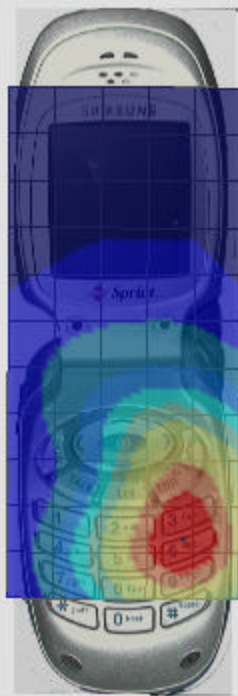

SAR Data Report 02032204

Start : 22-Mar-02 10:59:46 am  
End : 22-Mar-02 11:29:05 am  
Code Version : 4.08  
Robot Version: 4.08

Product Data:

Type : SAMSUNG  
Model Number : SPH-A500  
Serial Number : 2  
Frequency : 836.49 MHz  
Transmit Pwr : 0.400 W  
Antenna Type : Helical  
Antenna Posn. : In

Measurement Data:

Phantom Name : SAM-L  
Phantom Type : Left Ear  
Tissue Type : Brain  
Tissue Dielectric : 43.440  
Tissue Conductivity : 0.870  
Tissue Density : 1.000  
Robot Name : CRS

Probe Data:

Probe Name : PCT002  
Probe Type : E Fld Triangle  
Frequency : 835 MHz  
Tissue Type : Brain  
Calibrated Dielectric : 40.700  
Calibrated Conductivity : 0.890  
Calibrated Density : 1.000  
Probe Offset : 2.400 mm  
Conversion Factor : 5.800  
Probe Sensitivity : 3.597 3.474 3.049 mV/(mW/cm^2)  
Amplifier Gains : 20.00 20.00 20.00

Sample:

Rate: 6000 Samples/Sec  
Count: 100 Samples  
NIDAQ Gain: 5

Comments:

AMPS Mode CH-383  
Cheek  
CF=1; mb. Temp= 21.1 'C; Liq. Temp=21.0 'C


Area Scan - Max Peak SAR Value at x=74.0 y=8.0 = 1.05 W/kg

Zoom Scan - Max Peak SAR Value at x=77.0 y=7.0 z=0.0 = 1.63 W/kg


Max 1g SAR at x=76.0 y=8.0 z=0.0 = 1.10 W/kg


Max 10g SAR at x=75.0 y=8.0 z=0.0 = 0.73 W/kg

SAR - Z Axis  
at Hotspot x:77.0 y:7.0

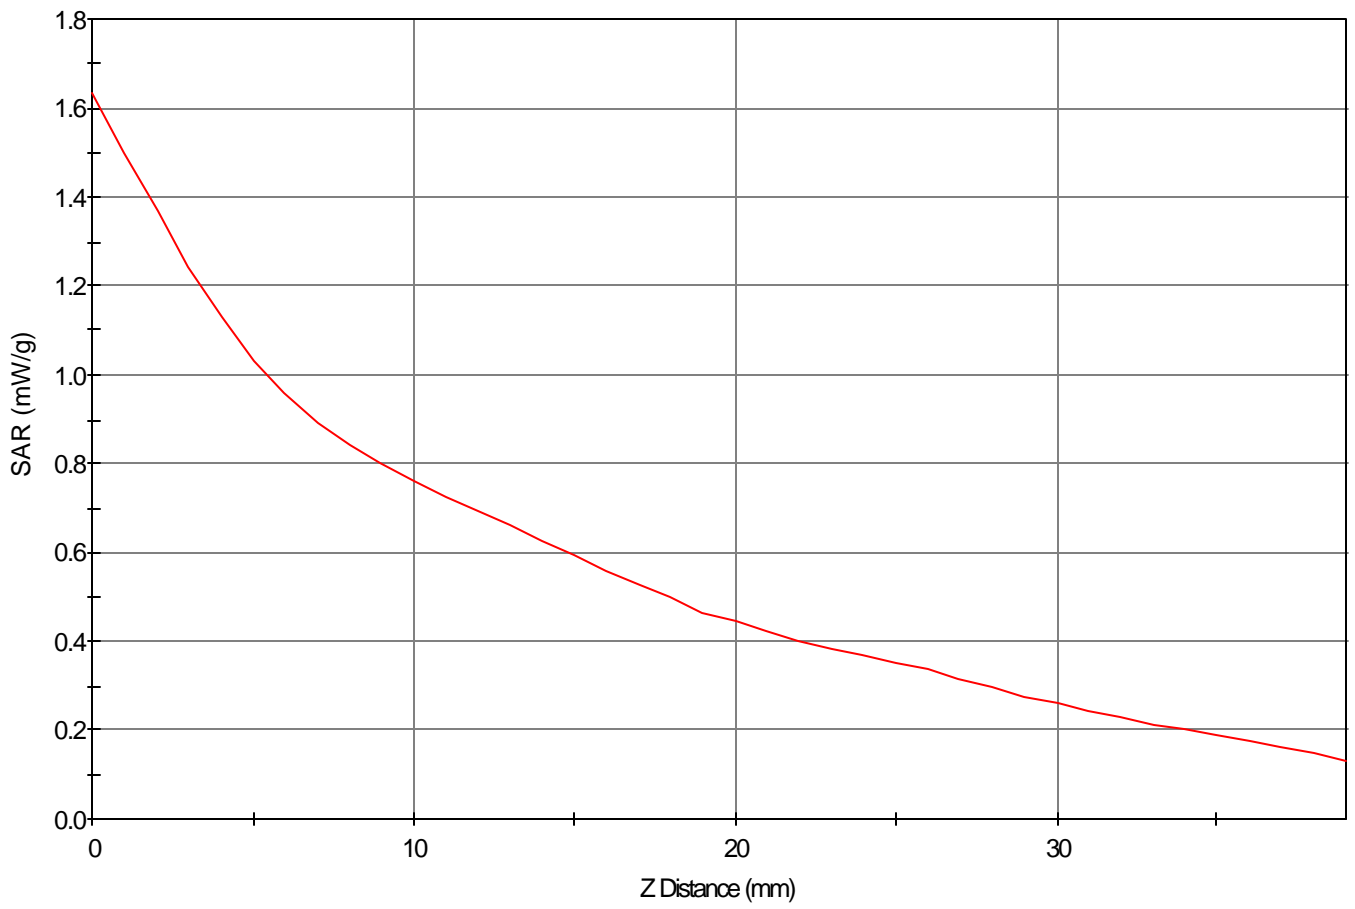

### 1g SAR Values

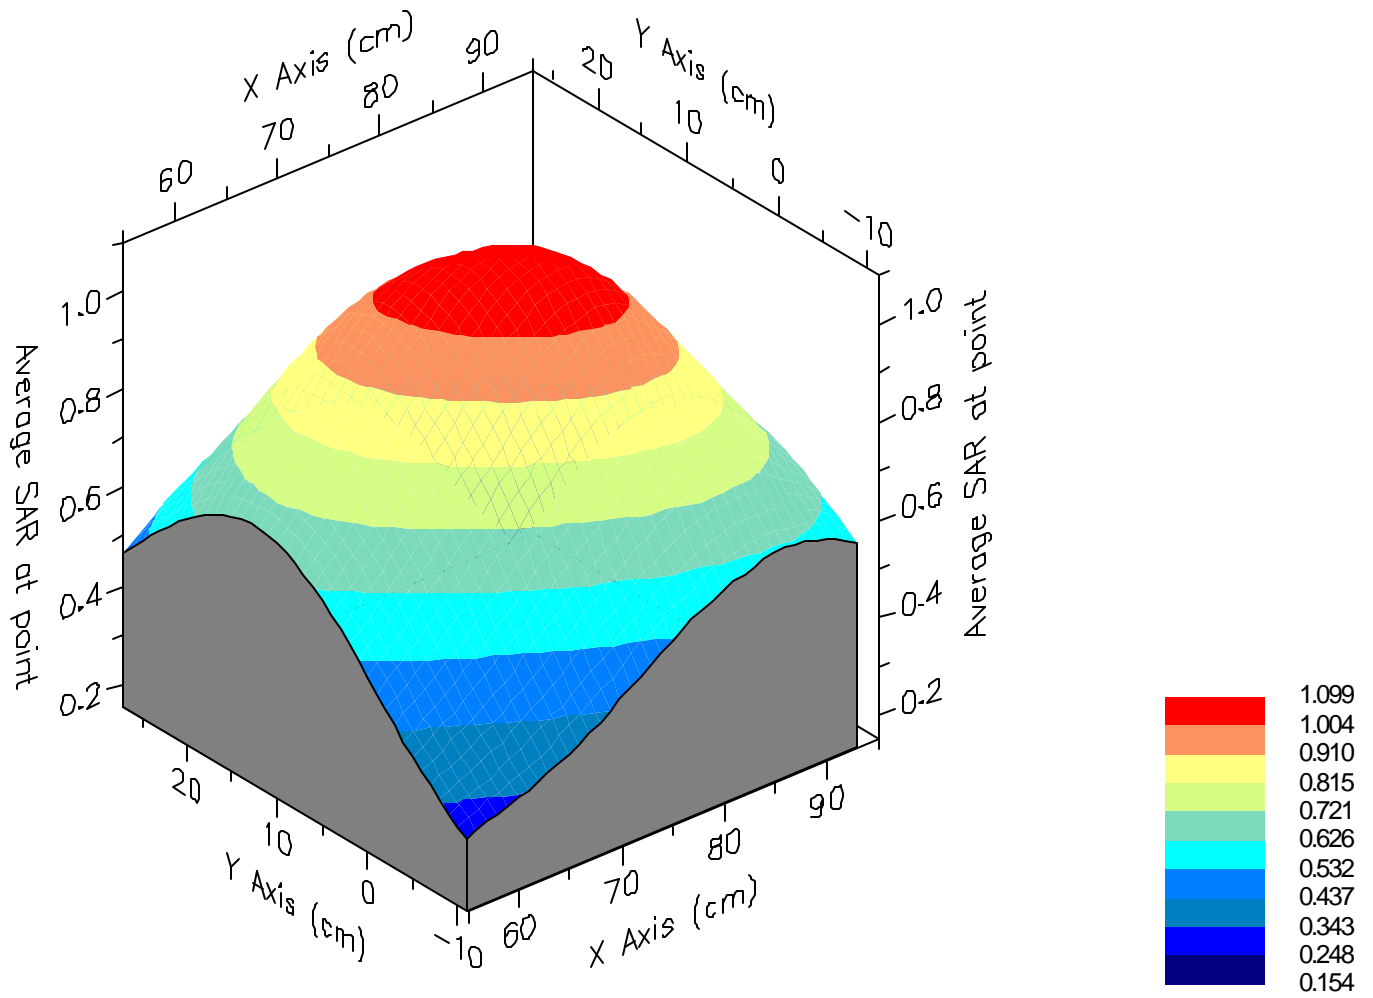

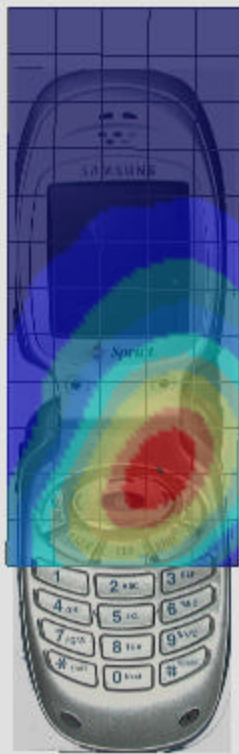

SAR Data Report 02032214

Start : 22-Mar-02 05:04:18 pm  
End : 22-Mar-02 05:19:02 pm  
Code Version : 4.08  
Robot Version: 4.08

Product Data:

Type : SAMSUNG  
Model Number : SPH-A500  
Serial Number : 2  
Frequency : 836.49 MHz  
Transmit Pwr : 0.400 W  
Antenna Type : Helical  
Antenna Posn. : In

Measurement Data:

Phantom Name : SAM-L  
Phantom Type : Left Ear  
Tissue Type : Brain  
Tissue Dielectric : 43.440  
Tissue Conductivity : 0.870  
Tissue Density : 1.000  
Robot Name : CRS

Probe Data:

Probe Name : PCT002  
Probe Type : E Fld Triangle  
Frequency : 835 MHz  
Tissue Type : Brain  
Calibrated Dielectric : 40.700  
Calibrated Conductivity : 0.890  
Calibrated Density : 1.000  
Probe Offset : 2.400 mm  
Conversion Factor : 5.800  
Probe Sensitivity : 3.597 3.474 3.049 mV/(mW/cm^2)  
Amplifier Gains : 20.00 20.00 20.00

Sample:

Rate: 6000 Samples/Sec  
Count: 100 Samples  
NIDAQ Gain: 5

Comments:

AMPS Mode CH-383  
Tilt  
CF=1; Amb. Temp= 21.1 'C; Liq. Temp=21.0 'C


Area Scan - Max Peak SAR Value at x=50.0 y=10.0 = 0.21 W/kg

Zoom Scan - Max Peak SAR Value at x=34.0 y=12.0 z=0.0 = 0.32 W/kg


Max 1g SAR at x=51.0 y=12.0 z=0.0 = 0.22 W/kg


Max 10g SAR at x=49.0 y=10.0 z=0.0 = 0.15 W/kg

SAR - Z Axis  
at Hotspot x:34.0 y:12.0

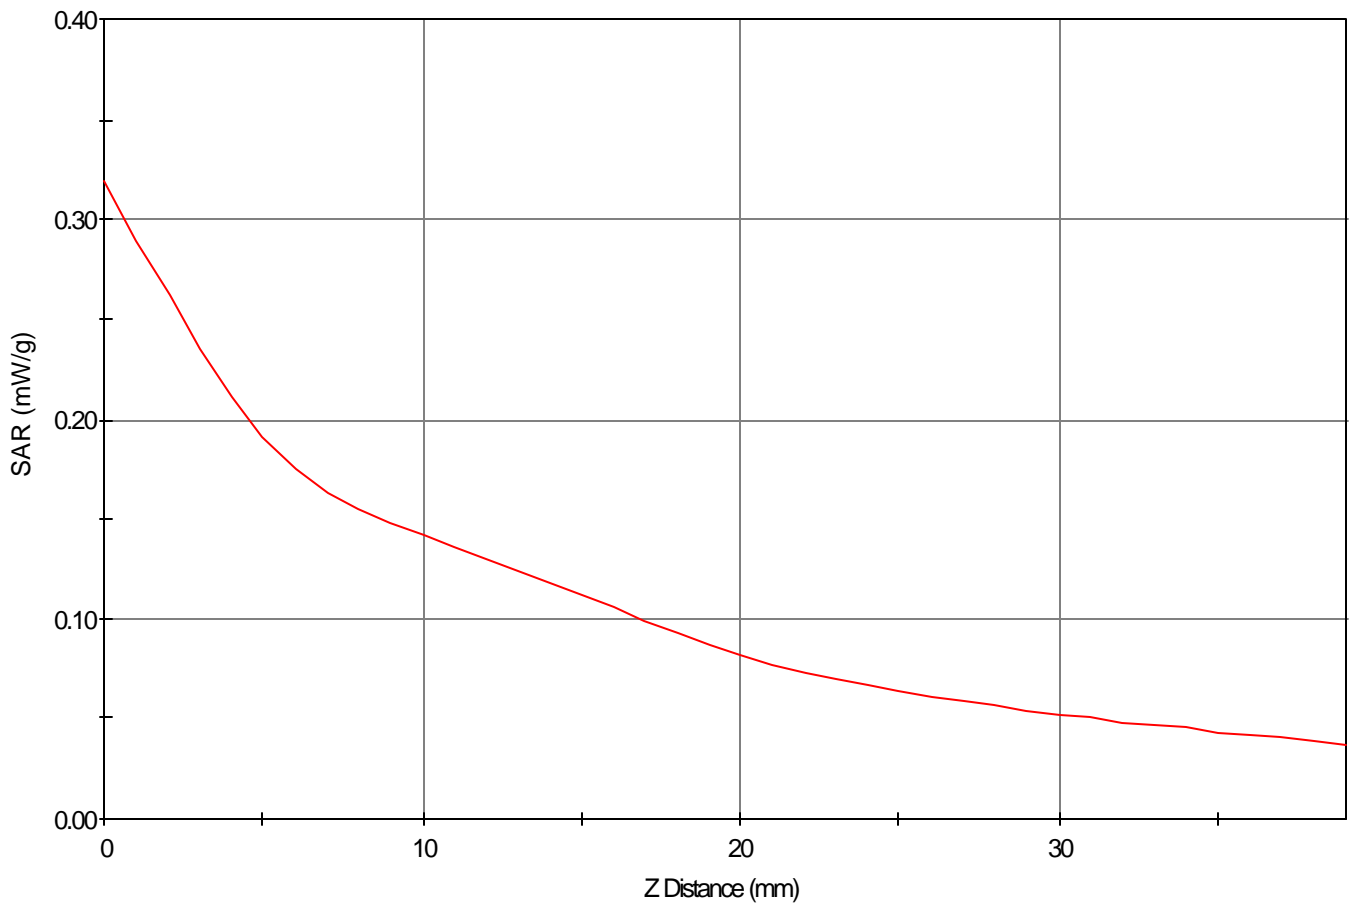

### 1g SAR Values

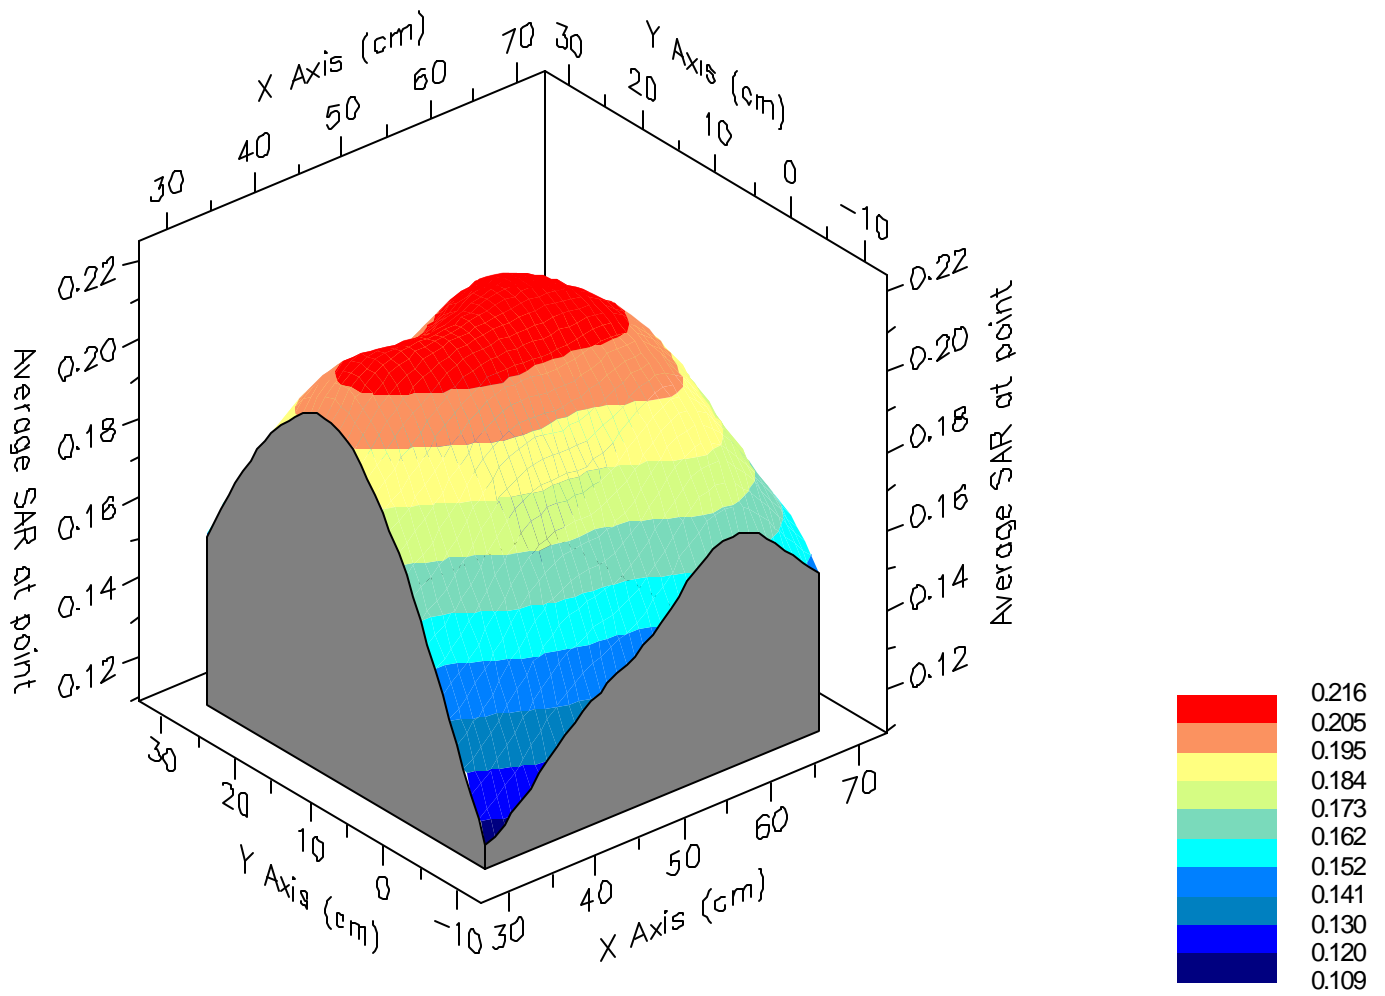

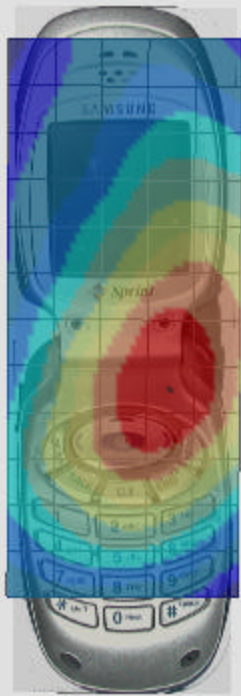

SAR Data Report 02061009

Start : 10-Jun-02 03:40:19 pm  
End : 10-Jun-02 03:46:28 pm  
Code Version : 4.08  
Robot Version: 4.08

Product Data:

Type : SAMSUNG  
Model Number : SPH-A500  
Serial Number : 2  
Frequency : 836.49 MHz  
Transmit Pwr : 0.400 W  
Antenna Type : Helical  
Antenna Posn. : In

Measurement Data:

Phantom Name : SAM-R  
Phantom Type : Right Ear  
Tissue Type : Brain  
Tissue Dielectric : 43.400  
Tissue Conductivity : 0.870  
Tissue Density : 1.000  
Robot Name : CRS

Probe Data:

Probe Name : PCT002  
Probe Type : E Fld Triangle  
Frequency : 835 MHz  
Tissue Type : Brain  
Calibrated Dielectric : 40.700  
Calibrated Conductivity : 0.890  
Calibrated Density : 1.000  
Probe Offset : 2.400 mm  
Conversion Factor : 5.800  
Probe Sensitivity : 3.597 3.474 3.049 mV/(mW/cm^2)  
Amplifier Gains : 20.00 20.00 20.00

Sample:

Rate: 6000 Samples/Sec  
Count: 100 Samples  
NIDAQ Gain: 5

Comments:

AMPS CH-383  
Tilt  
CF=1; Amb. Temp= 22.7 'C; Liq. Temp=22.0 'C


Area Scan - Max Peak SAR Value at x=71.0 y=14.0 = 0.22 W/kg

Zoom Scan - Max Peak SAR Value at x=71.0 y=19.0 z=0.0 = 0.33 W/kg


Max 1g SAR at x=72.0 y=18.0 z=0.0 = 0.23 W/kg


Max 10g SAR at x=72.0 y=15.0 z=0.0 = 0.16 W/kg

SAR - Z Axis  
at Hotspot x:71.0 y:19.0

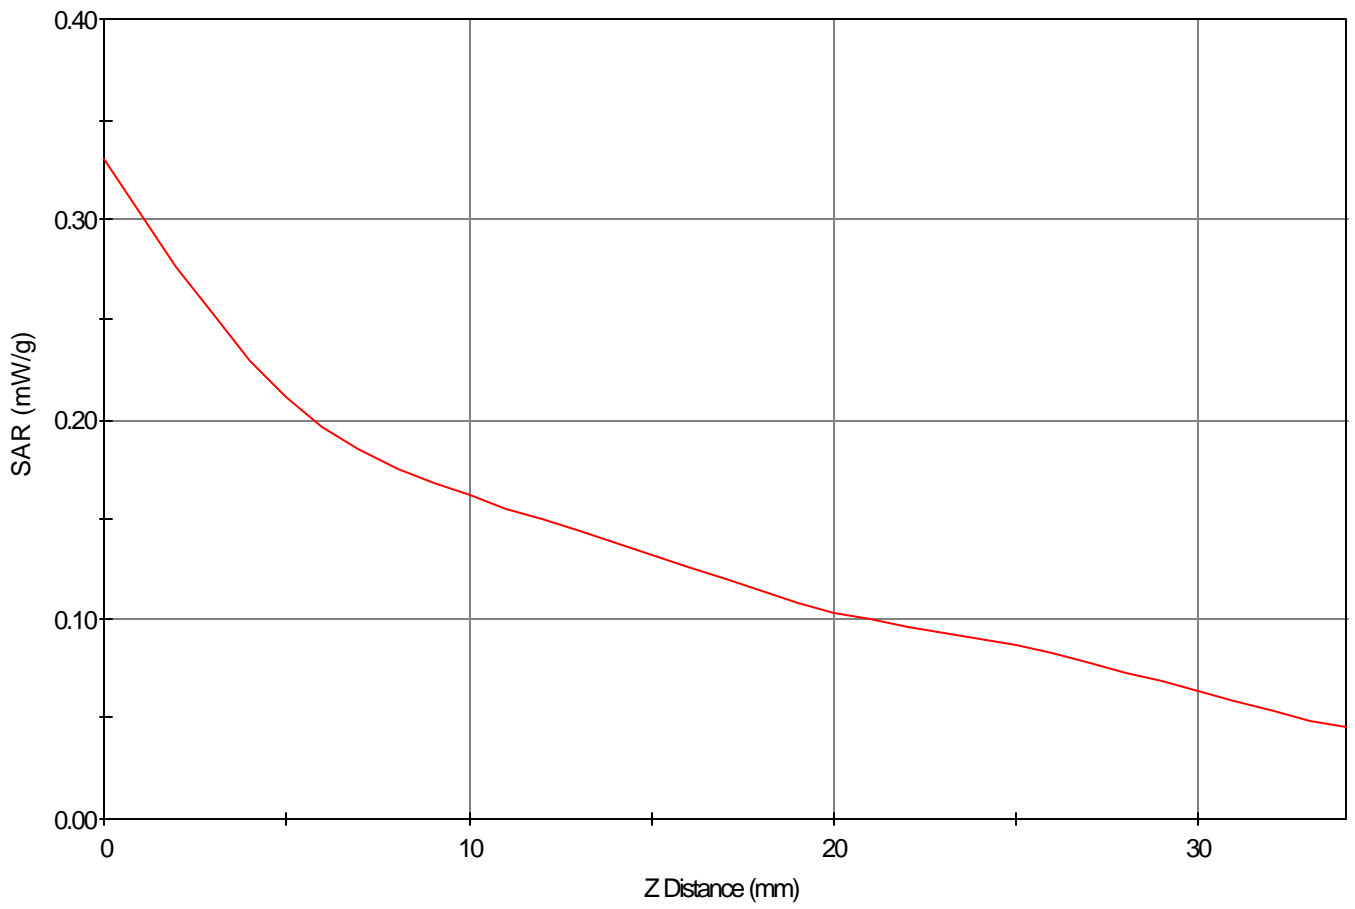

### 1g SAR Values

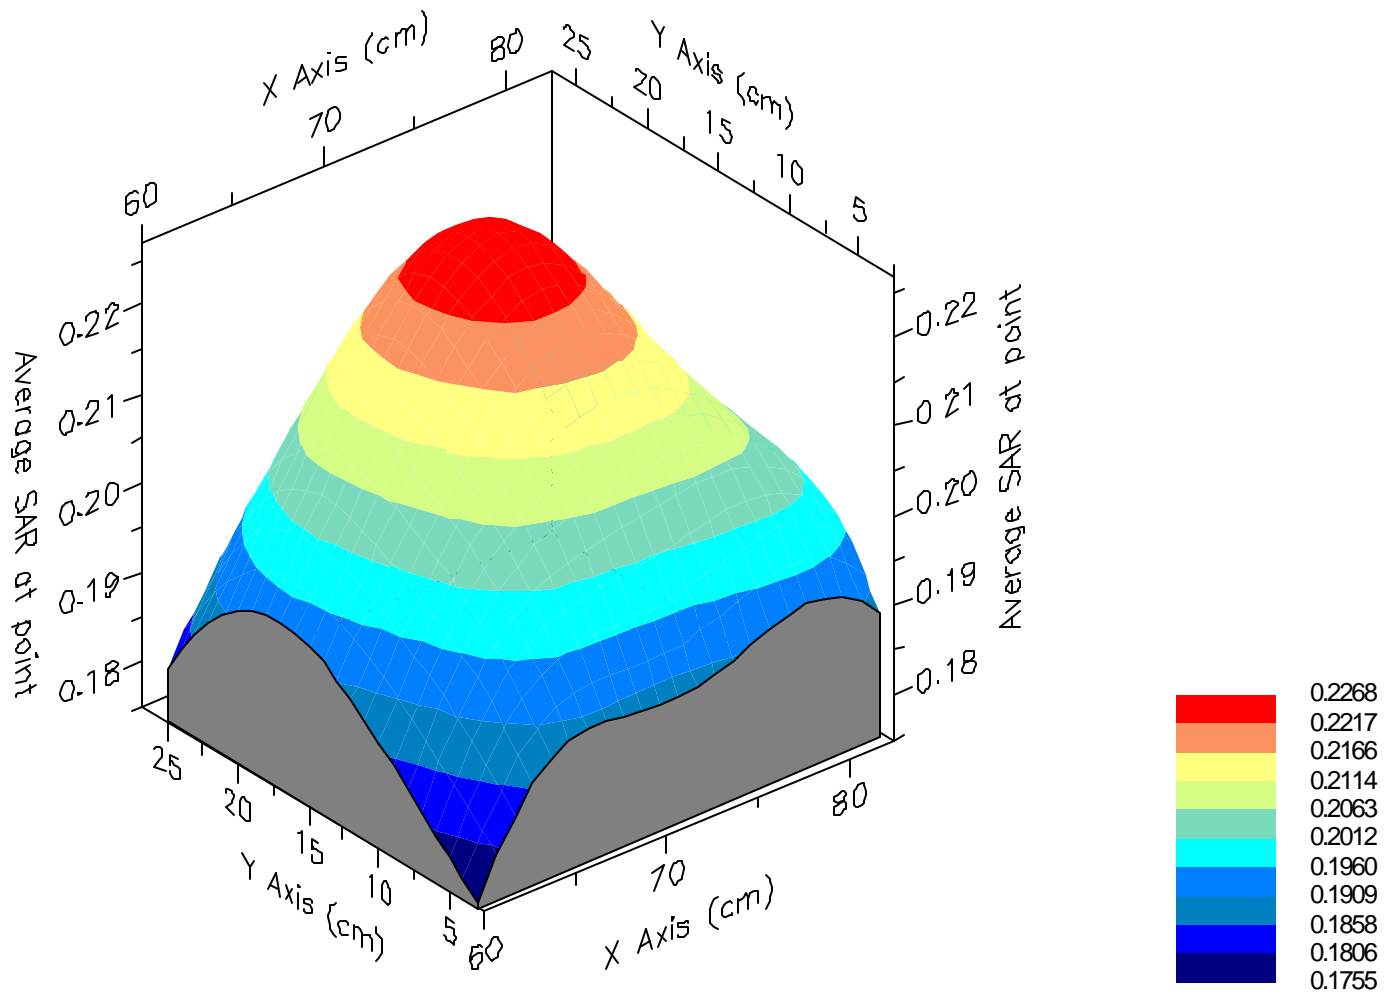

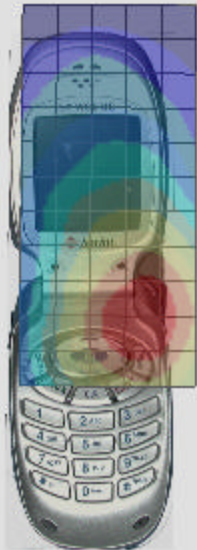

SAR Data Report 02032212

Start : 22-Mar-02 04:01:10 pm  
End : 22-Mar-02 04:30:32 pm  
Code Version : 4.08  
Robot Version: 4.08

Product Data:

Type : SAMSUNG  
Model Number : SPH-A500  
Serial Number : 2  
Frequency : 836.49 MHz  
Transmit Pwr : 0.355 W  
Antenna Type : Helical  
Antenna Posn. : In

Measurement Data:

Phantom Name : SAM-L  
Phantom Type : Left Ear  
Tissue Type : Brain  
Tissue Dielectric : 43.440  
Tissue Conductivity : 0.870  
Tissue Density : 1.000  
Robot Name : CRS

Probe Data:

Probe Name : PCT002  
Probe Type : E Fld Triangle  
Frequency : 835 MHz  
Tissue Type : Brain  
Calibrated Dielectric : 40.700  
Calibrated Conductivity : 0.890  
Calibrated Density : 1.000  
Probe Offset : 2.400 mm  
Conversion Factor : 5.800  
Probe Sensitivity : 3.597 3.474 3.049 mV/(mW/cm^2)  
Amplifier Gains : 20.00 20.00 20.00

Sample:

Rate: 6000 Samples/Sec  
Count: 100 Samples  
NIDAQ Gain: 5

Comments:

CDMA Mode CH-383  
Cheek  
Amb. Temp= 21.1 'C; Liq. Temp=21.0 'C


Area Scan - Max Peak SAR Value at x=74.0 y=8.0 = 1.01 W/kg

Zoom Scan - Max Peak SAR Value at x=74.0 y=10.0 z=0.0 = 1.50 W/kg


Max 1g SAR at x=75.0 y=9.0 z=0.0 = 1.05 W/kg


Max 10g SAR at x=74.0 y=8.0 z=0.0 = 0.70 W/kg

SAR - Z Axis  
at Hotspot x:74.0 y:10.0

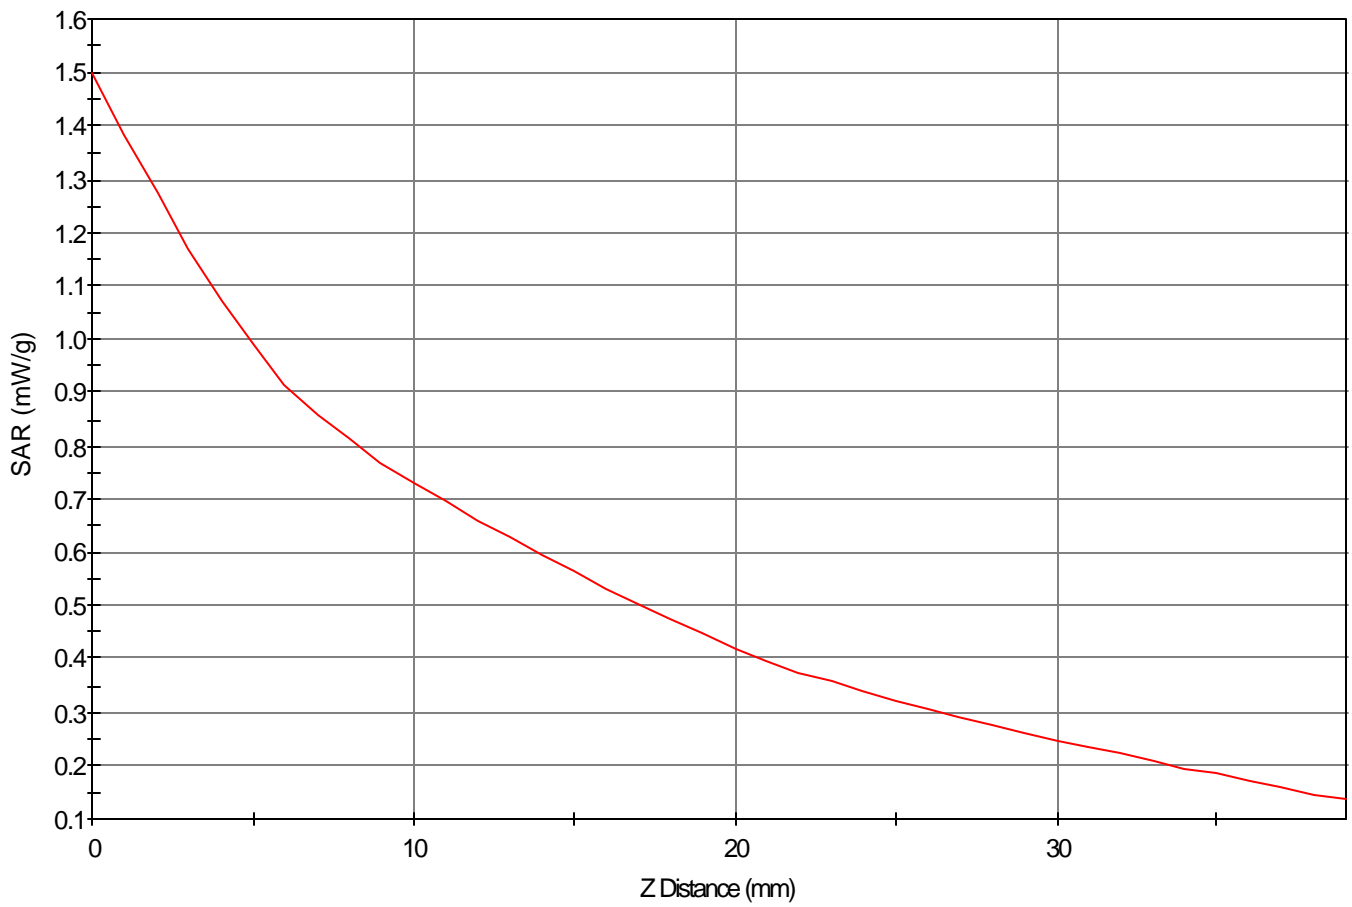

### 1g SAR Values

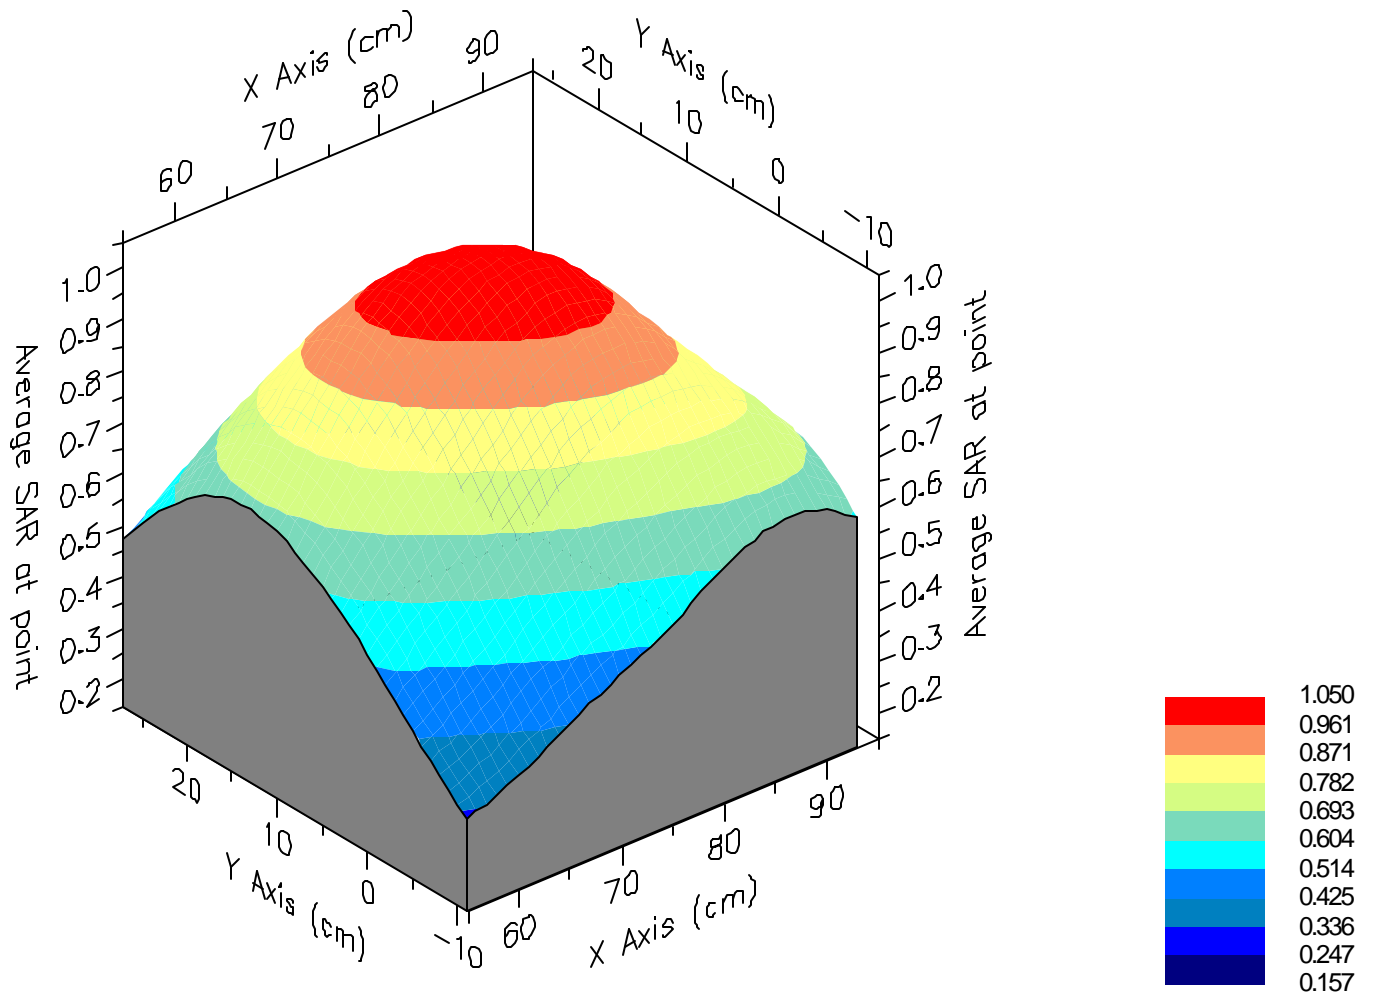

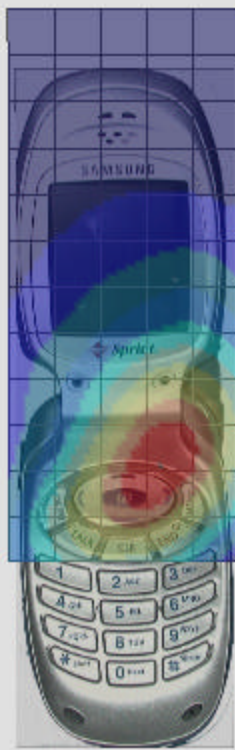

SAR Data Report 02032224

Start : 22-Mar-02 07:53:26 pm  
End : 22-Mar-02 08:05:41 pm  
Code Version : 4.08  
Robot Version: 4.08

Product Data:

Type : SAMSUNG  
Model Number : SPH-A500  
Serial Number : 2  
Frequency : 836.49 MHz  
Transmit Pwr : 0.355 W  
Antenna Type : Helical  
Antenna Posn. : In

Measurement Data:

Phantom Name : SAM-R  
Phantom Type : Right Ear  
Tissue Type : Brain  
Tissue Dielectric : 43.440  
Tissue Conductivity : 0.870  
Tissue Density : 1.000  
Robot Name : CRS

Probe Data:

Probe Name : PCT002  
Probe Type : E Fld Triangle  
Frequency : 835 MHz  
Tissue Type : Brain  
Calibrated Dielectric : 40.700  
Calibrated Conductivity : 0.890  
Calibrated Density : 1.000  
Probe Offset : 2.400 mm  
Conversion Factor : 5.800  
Probe Sensitivity : 3.597 3.474 3.049 mV/(mW/cm^2)  
Amplifier Gains : 20.00 20.00 20.00

Sample:

Rate: 6000 Samples/Sec  
Count: 100 Samples  
NIDAQ Gain: 5

Comments:

CDMA Mode CH-383  
Cheek  
Amb. Temp= 21.1 'C; Liq. Temp=20.9 'C


Area Scan - Max Peak SAR Value at x=75.0 y=13.0 = 0.90 W/kg

Zoom Scan - Max Peak SAR Value at x=76.0 y=13.0 z=0.0 = 1.38 W/kg


Max 1g SAR at x=76.0 y=14.0 z=0.0 = 0.92 W/kg


Max 10g SAR at x=76.0 y=14.0 z=0.0 = 0.60 W/kg

SAR - Z Axis  
at Hotspot x:76.0 y:13.0

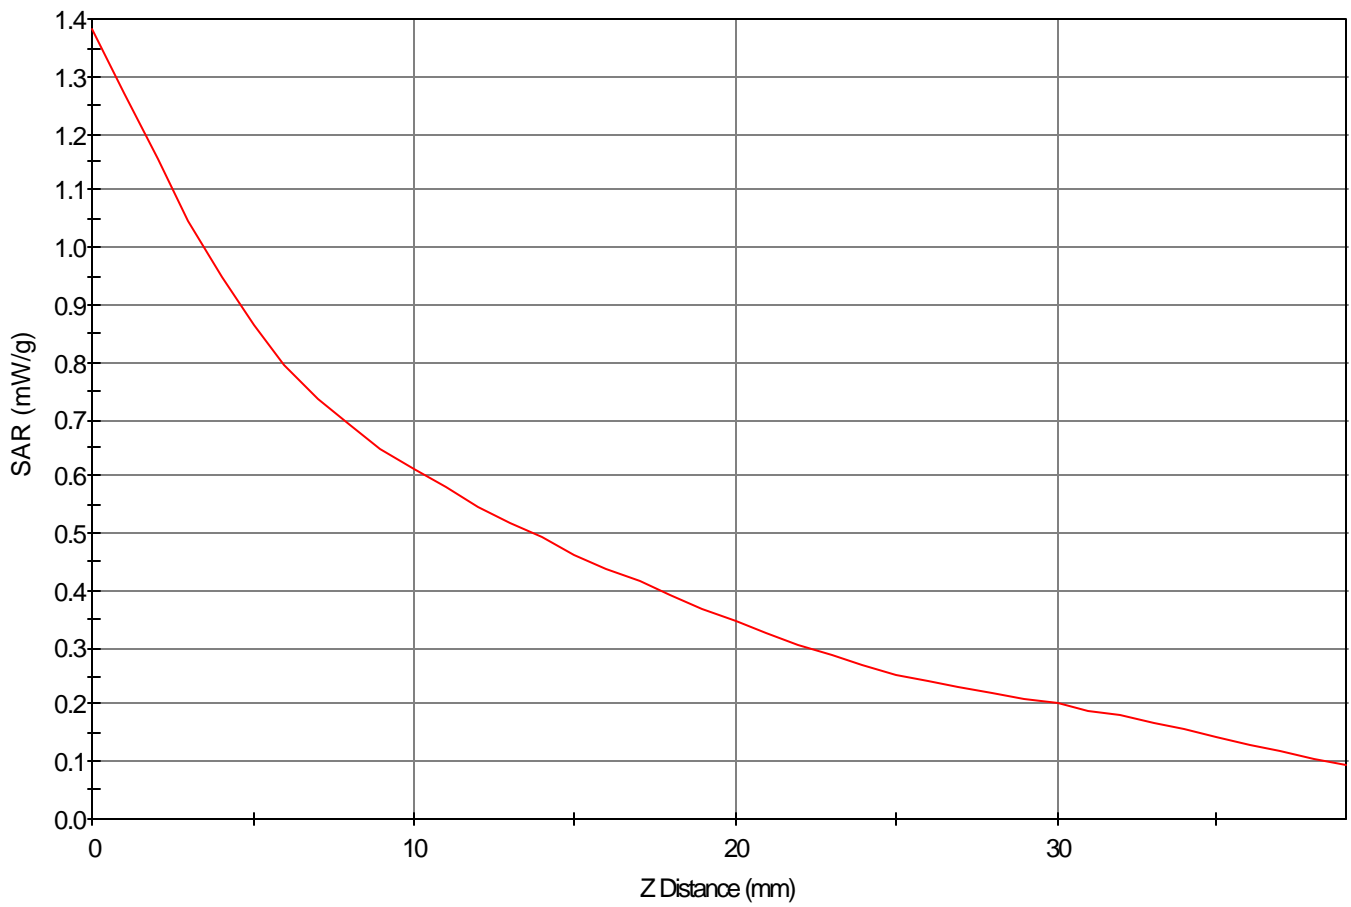

### 1g SAR Values

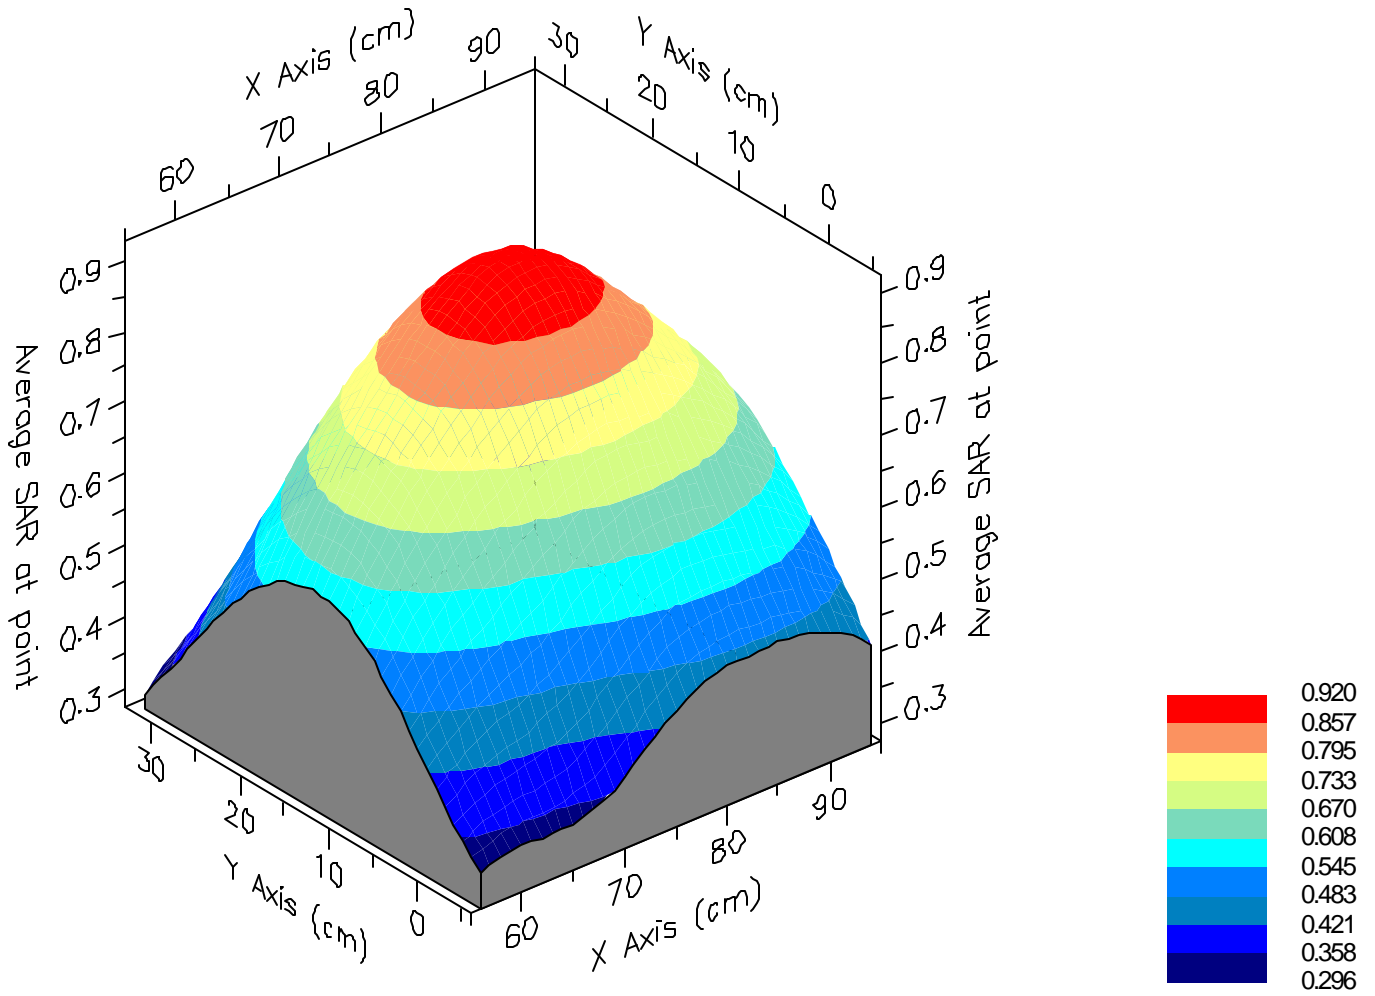

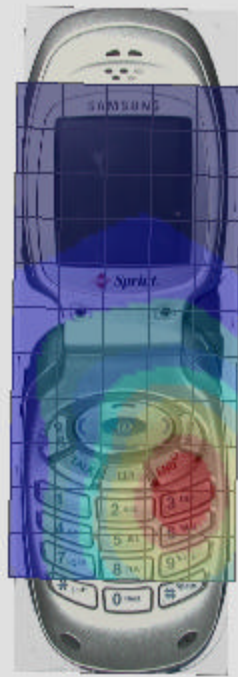

SAR Data Report 02032125

Start : 21-Mar-02 04:02:54 pm  
End : 21-Mar-02 04:19:22 pm  
Code Version : 4.08  
Robot Version: 4.08

Product Data:

Type : SAMSUNG  
Model Number : SPH-A500  
Serial Number : 2  
Frequency : 1880.00 MHz  
Transmit Pwr : 0.280 W  
Antenna Type : Helical  
Antenna Posn. : In

Measurement Data:

Phantom Name : SAM-R  
Phantom Type : Right Ear  
Tissue Type : Brain  
Tissue Dielectric : 40.290  
Tissue Conductivity : 1.440  
Tissue Density : 1.000  
Robot Name : CRS

Probe Data:

Probe Name : PCT002  
Probe Type : E Fld Triangle  
Frequency : 1900 MHz  
Tissue Type : Brain  
Calibrated Dielectric : 40.200  
Calibrated Conductivity : 1.410  
Calibrated Density : 1.000  
Probe Offset : 2.400 mm  
Conversion Factor : 4.700  
Probe Sensitivity : 3.000 2.995 2.653 mV/(mW/cm^2)  
Amplifier Gains : 20.00 20.00 20.00

Sample:

Rate: 6000 Samples/Sec  
Count: 100 Samples  
NIDAQ Gain: 5

Comments:

PCS Mode CH-0600  
Cheek  
Amb. Temp= 21.0 'C; Liq. Temp=20.9 'C


Area Scan - Max Peak SAR Value at x=77.0 y=11.0 = 1.30 W/kg

Zoom Scan - Max Peak SAR Value at x=74.0 y=14.0 z=0.0 = 2.16 W/kg


Max 1g SAR at x=76.0 y=11.0 z=0.0 = 1.30 W/kg


Max 10g SAR at x=77.0 y=11.0 z=0.0 = 0.75 W/kg

SAR - Z Axis  
at Hotspot x:74.0 y:14.0

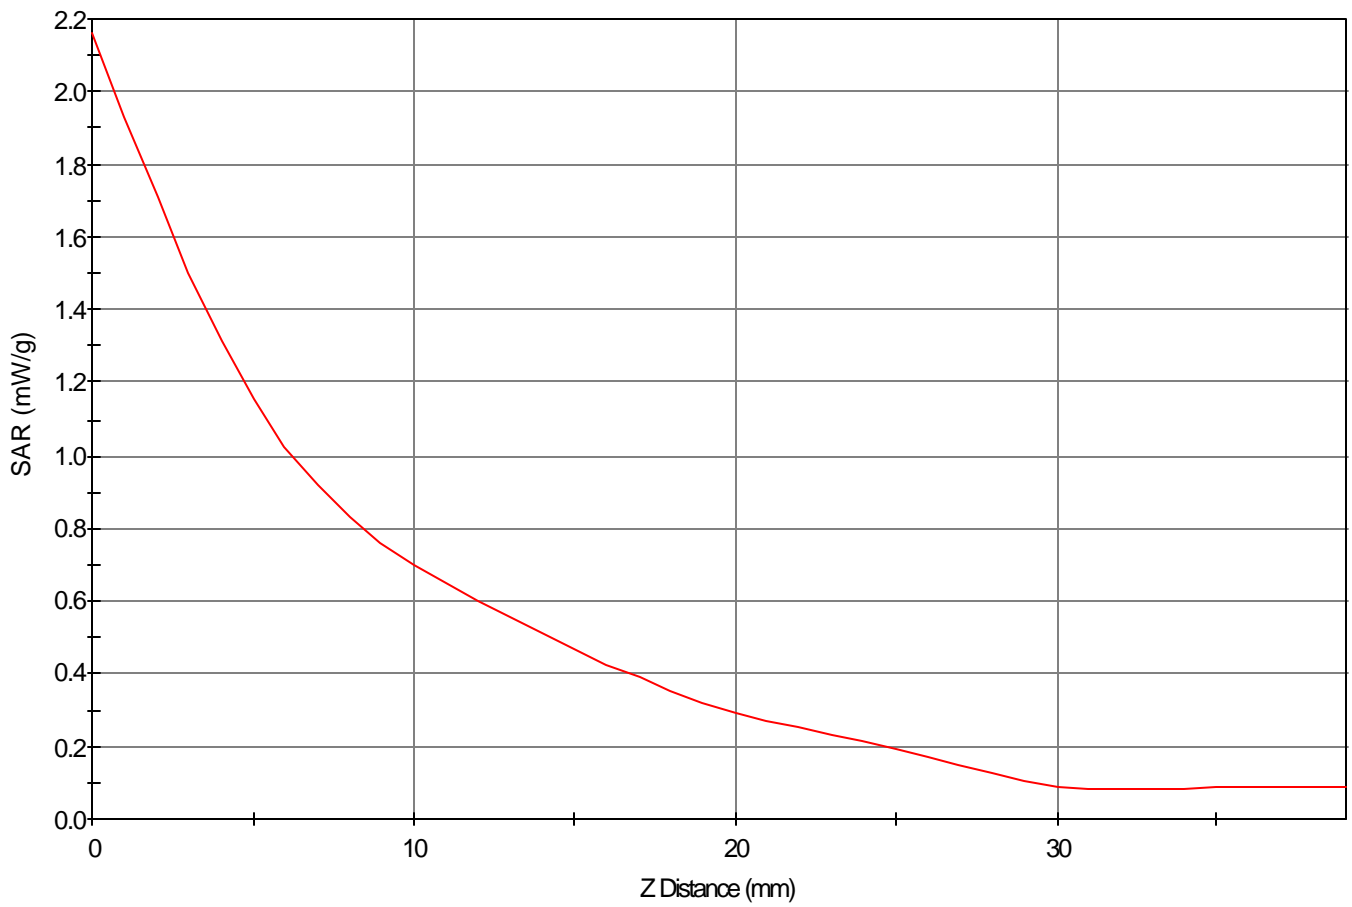

### 1g SAR Values

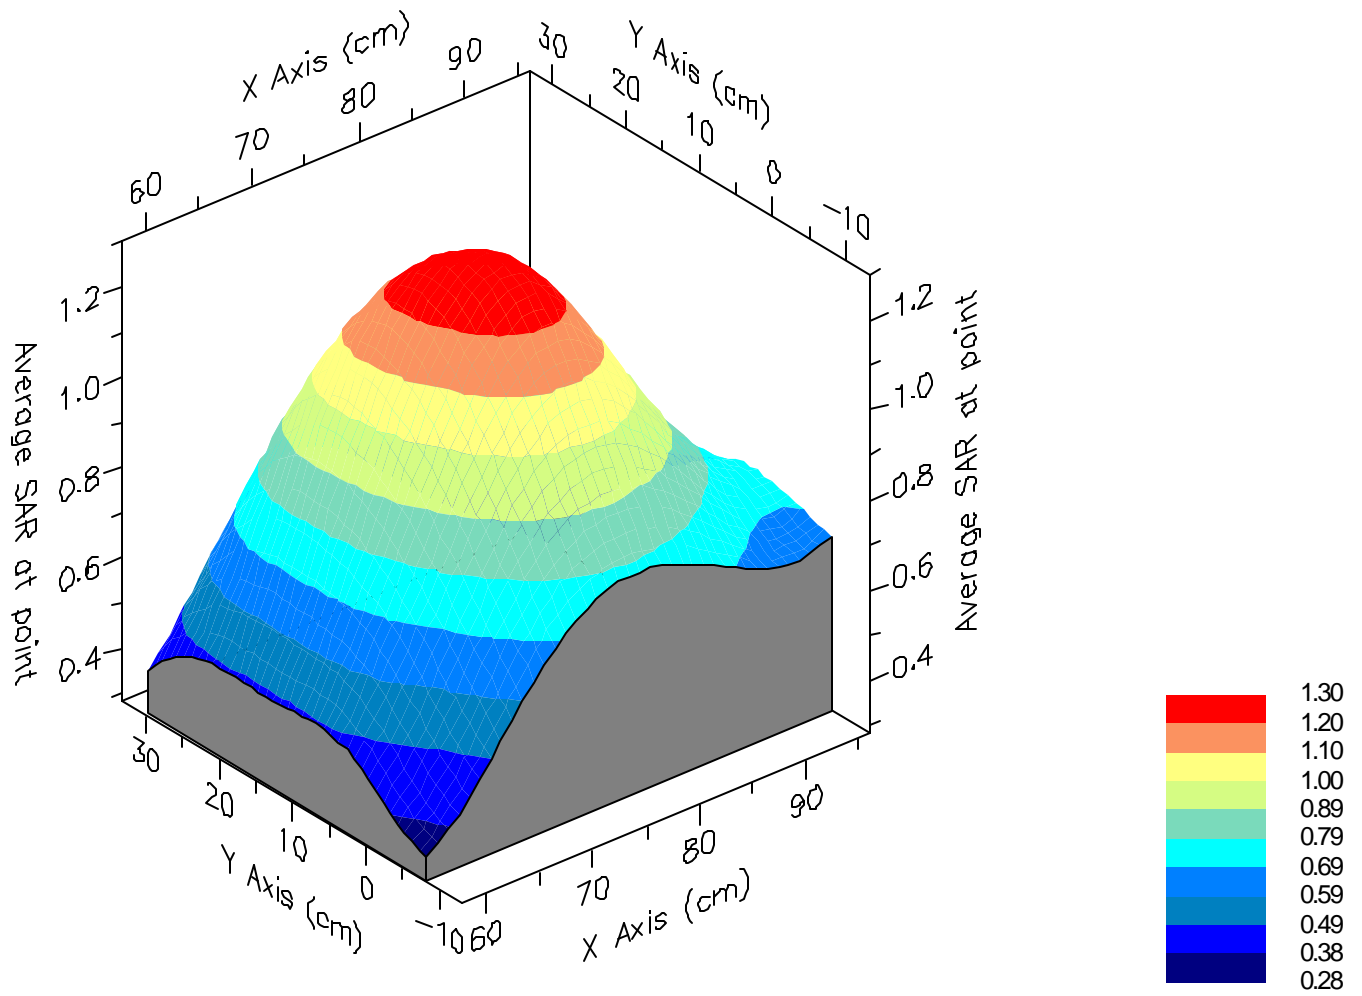

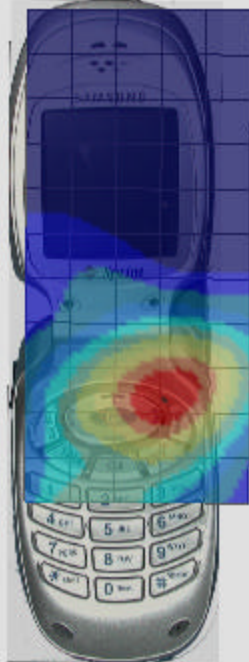

SAR Data Report 02032113

Start : 21-Mar-02 12:58:28 pm  
End : 21-Mar-02 01:16:29 pm  
Code Version : 4.08  
Robot Version: 4.08

Product Data:

Type : SAMSUNG  
Model Number : SPH-A500  
Serial Number : 2  
Frequency : 1880.00 MHz  
Transmit Pwr : 0.280 W  
Antenna Type : Helical  
Antenna Posn. : In

Measurement Data:

Phantom Name : SAM-L  
Phantom Type : Left Ear  
Tissue Type : Brain  
Tissue Dielectric : 40.290  
Tissue Conductivity : 1.440  
Tissue Density : 1.000  
Robot Name : CRS

Probe Data:

Probe Name : PCT002  
Probe Type : E Fld Triangle  
Frequency : 1900 MHz  
Tissue Type : Brain  
Calibrated Dielectric : 40.200  
Calibrated Conductivity : 1.410  
Calibrated Density : 1.000  
Probe Offset : 2.400 mm  
Conversion Factor : 4.700  
Probe Sensitivity : 3.000 2.995 2.653 mV/(mW/cm^2)  
Amplifier Gains : 20.00 20.00 20.00

Sample:

Rate: 6000 Samples/Sec  
Count: 100 Samples  
NIDAQ Gain: 5

Comments:

PCS Mode CH-0600  
Cheek  
CF=1; Amb. Temp= 21.0 'C; Liq. Temp=20.8 'C


Area Scan - Max Peak SAR Value at x=90.0 y=-18.0 = 1.34 W/kg

Zoom Scan - Max Peak SAR Value at x=78.0 y=2.0 z=0.0 = 2.12 W/kg


Max 1g SAR at x=79.0 y=2.0 z=0.0 = 1.33 W/kg


Max 10g SAR at x=87.0 y=-11.0 z=0.0 = 0.91 W/kg

SAR - Z Axis  
at Hotspot x:78.0 y:2.0

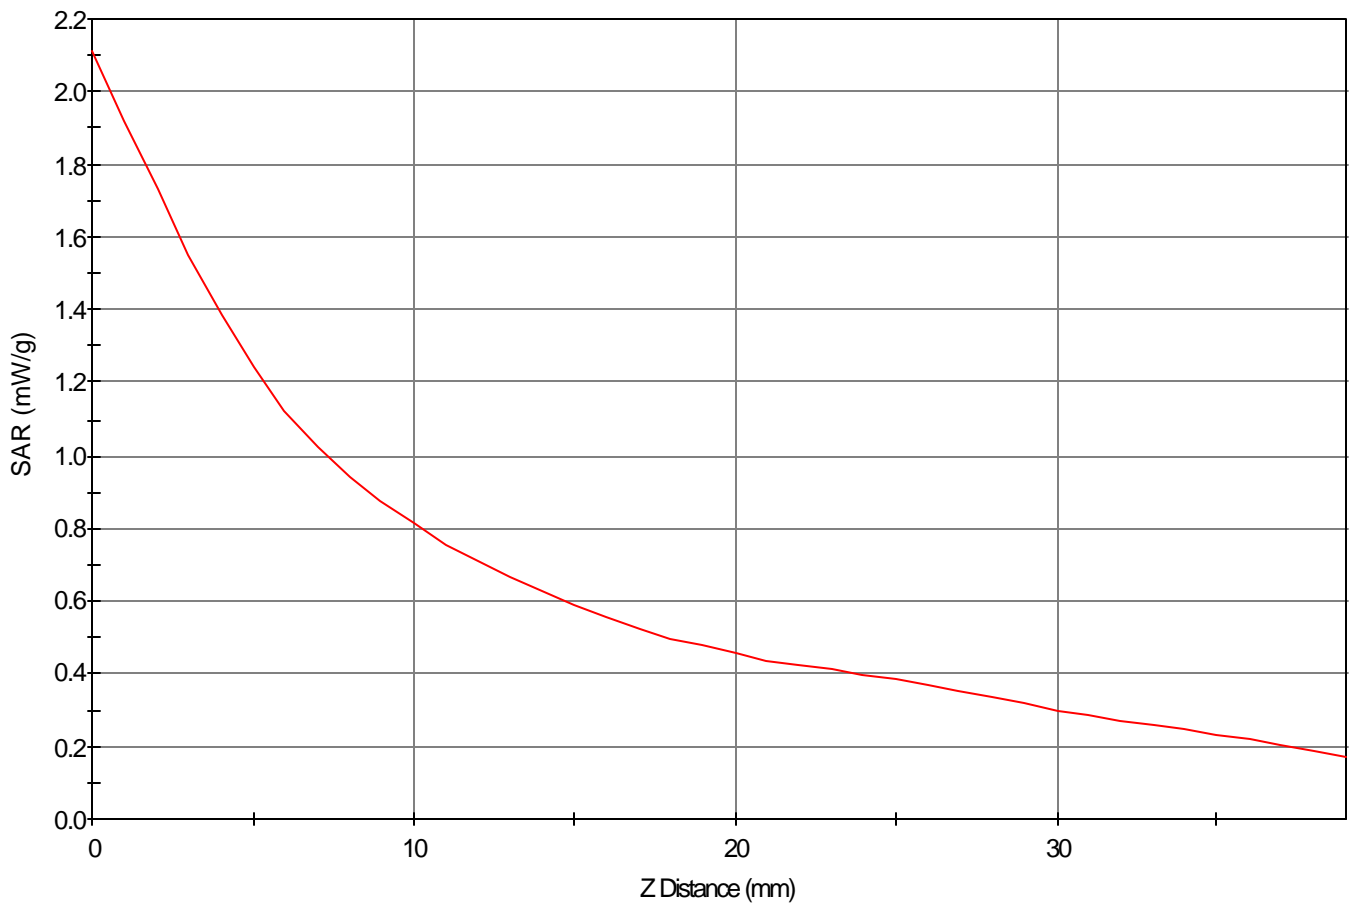

### 1g SAR Values

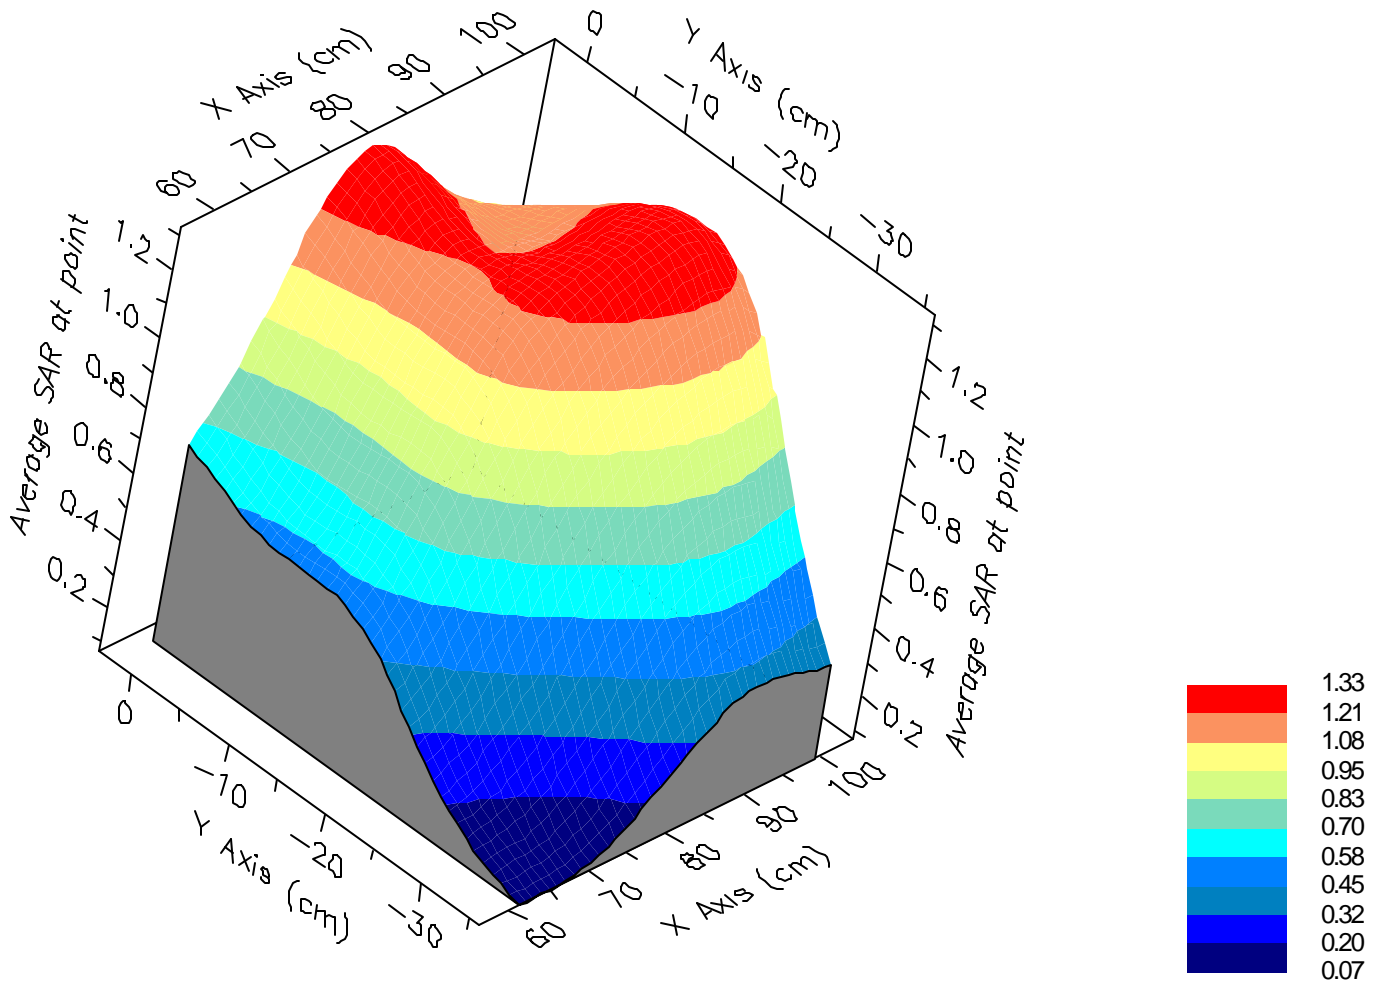

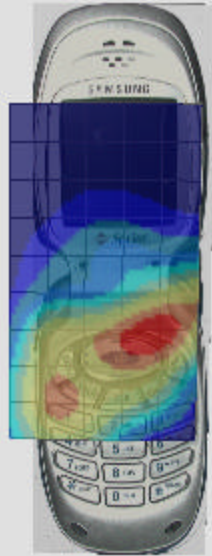

SAR Data Report 02032120

Start : 21-Mar-02 02:59:33 pm  
End : 21-Mar-02 03:24:57 pm  
Code Version : 4.08  
Robot Version: 4.08

Product Data:

Type : SAMSUNG  
Model Number : SPH-A500  
Serial Number : 2  
Frequency : 1880.00 MHz  
Transmit Pwr : 0.280 W  
Antenna Type : Helical  
Antenna Posn. : In

Measurement Data:

Phantom Name : SAM-L  
Phantom Type : Left Ear  
Tissue Type : Brain  
Tissue Dielectric : 40.290  
Tissue Conductivity : 1.440  
Tissue Density : 1.000  
Robot Name : CRS

Probe Data:

Probe Name : PCT002  
Probe Type : E Fld Triangle  
Frequency : 1900 MHz  
Tissue Type : Brain  
Calibrated Dielectric : 40.200  
Calibrated Conductivity : 1.410  
Calibrated Density : 1.000  
Probe Offset : 2.400 mm  
Conversion Factor : 4.700  
Probe Sensitivity : 3.000 2.995 2.653 mV/(mW/cm^2)  
Amplifier Gains : 20.00 20.00 20.00

Sample:

Rate: 6000 Samples/Sec  
Count: 100 Samples  
NIDAQ Gain: 5

Comments:

PCS Mode CH-0600  
Tilt  
Amb. Temp= 21.0 'C; Liq. Temp=20.8 'C


Area Scan - Max Peak SAR Value at x=80.0 y=-3.0 = 0.19 W/kg

Zoom Scan - Max Peak SAR Value at x=73.0 y=5.0 z=0.0 = 0.45 W/kg


Max 1g SAR at x=76.0 y=3.0 z=0.0 = 0.21 W/kg

Max 10g SAR at x=80.0 y=-4.0 z=0.0 = 0.13 W/kg

SAR - Z Axis  
at Hotspot x:73.0 y:5.0

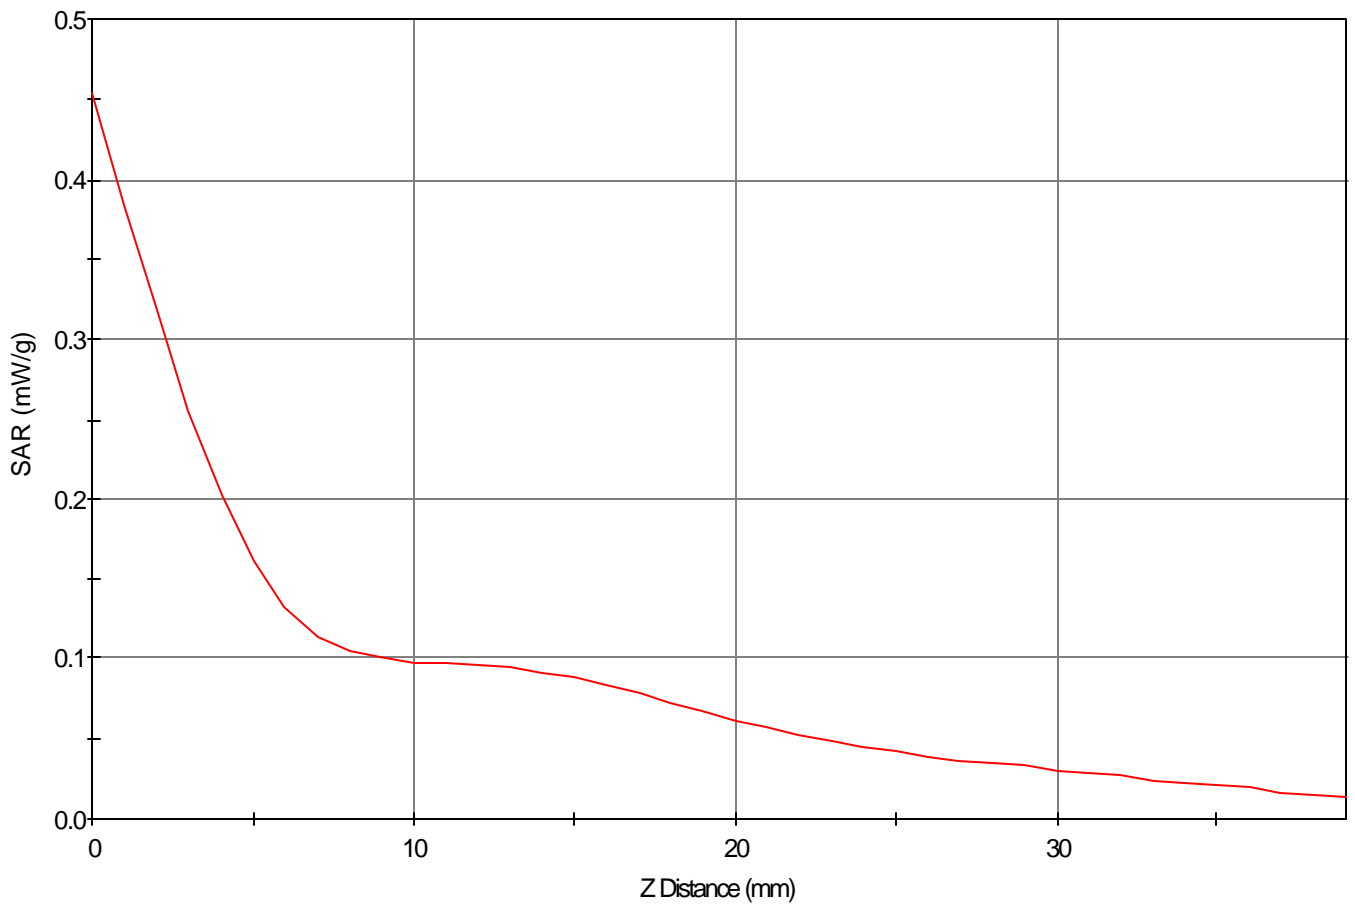

### 1g SAR Values

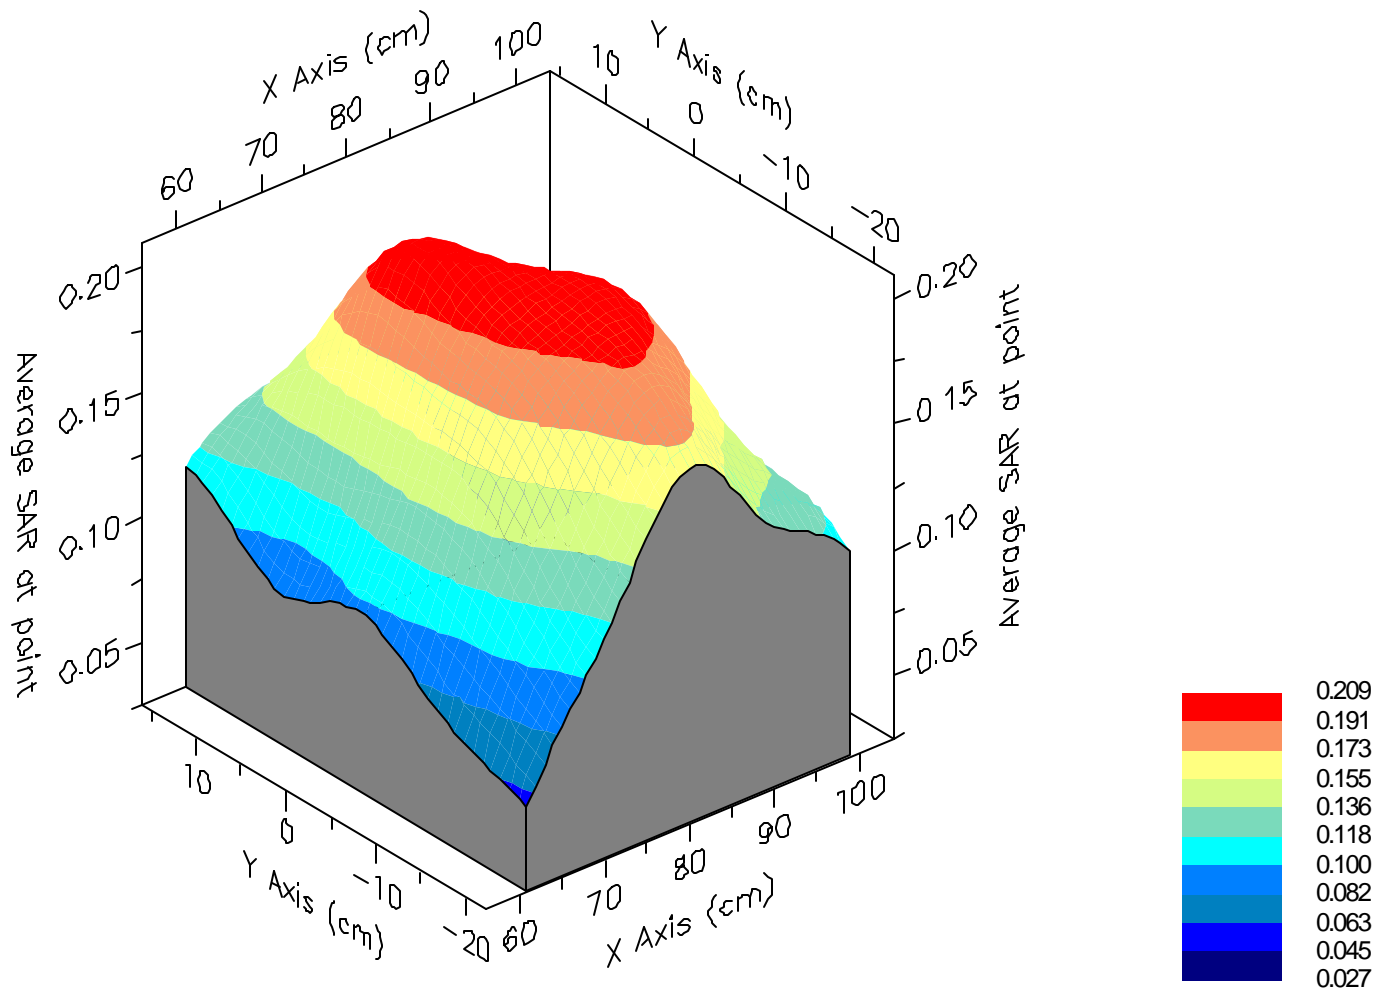



SAR Data Report 02061006

Start : 10-Jun-02 02:29:25 pm  
End : 10-Jun-02 02:35:30 pm  
Code Version : 4.08  
Robot Version: 4.08

Product Data:

Type : SAMSUNG  
Model Number : SPH-A500  
Serial Number : 2  
Frequency : 1880.00 MHz  
Transmit Pwr : 0.280 W  
Antenna Type : Helical  
Antenna Posn. : In

Measurement Data:

Phantom Name : SAM-R  
Phantom Type : Right Ear  
Tissue Type : Brain  
Tissue Dielectric : 41.400  
Tissue Conductivity : 1.400  
Tissue Density : 1.000  
Robot Name : CRS

Probe Data:

Probe Name : PCT002  
Probe Type : E Fld Triangle  
Frequency : 1900 MHz  
Tissue Type : Brain  
Calibrated Dielectric : 40.200  
Calibrated Conductivity : 1.410  
Calibrated Density : 1.000  
Probe Offset : 2.400 mm  
Conversion Factor : 4.700  
Probe Sensitivity : 3.000 2.995 2.653 mV/(mW/cm^2)  
Amplifier Gains : 20.00 20.00 20.00

Sample:

Rate: 6000 Samples/Sec  
Count: 100 Samples  
NIDAQ Gain: 5

Comments:

PCS CH-25  
Tilt  
CF=1; Amb. Temp= 22.7 'C; Liq. Temp=22.0 'C


Area Scan - Max Peak SAR Value at x=76.0 y=8.0 = 0.14 W/kg

Zoom Scan - Max Peak SAR Value at x=60.0 y=24.0 z=0.0 = 0.35 W/kg



Max 1g SAR at x=81.0 y=6.0 z=0.0 = 0.18 W/kg


Max 10g SAR at x=81.0 y=5.0 z=0.0 = 0.11 W/kg

SAR - Z Axis  
at Hotspot x:60.0 y:24.0

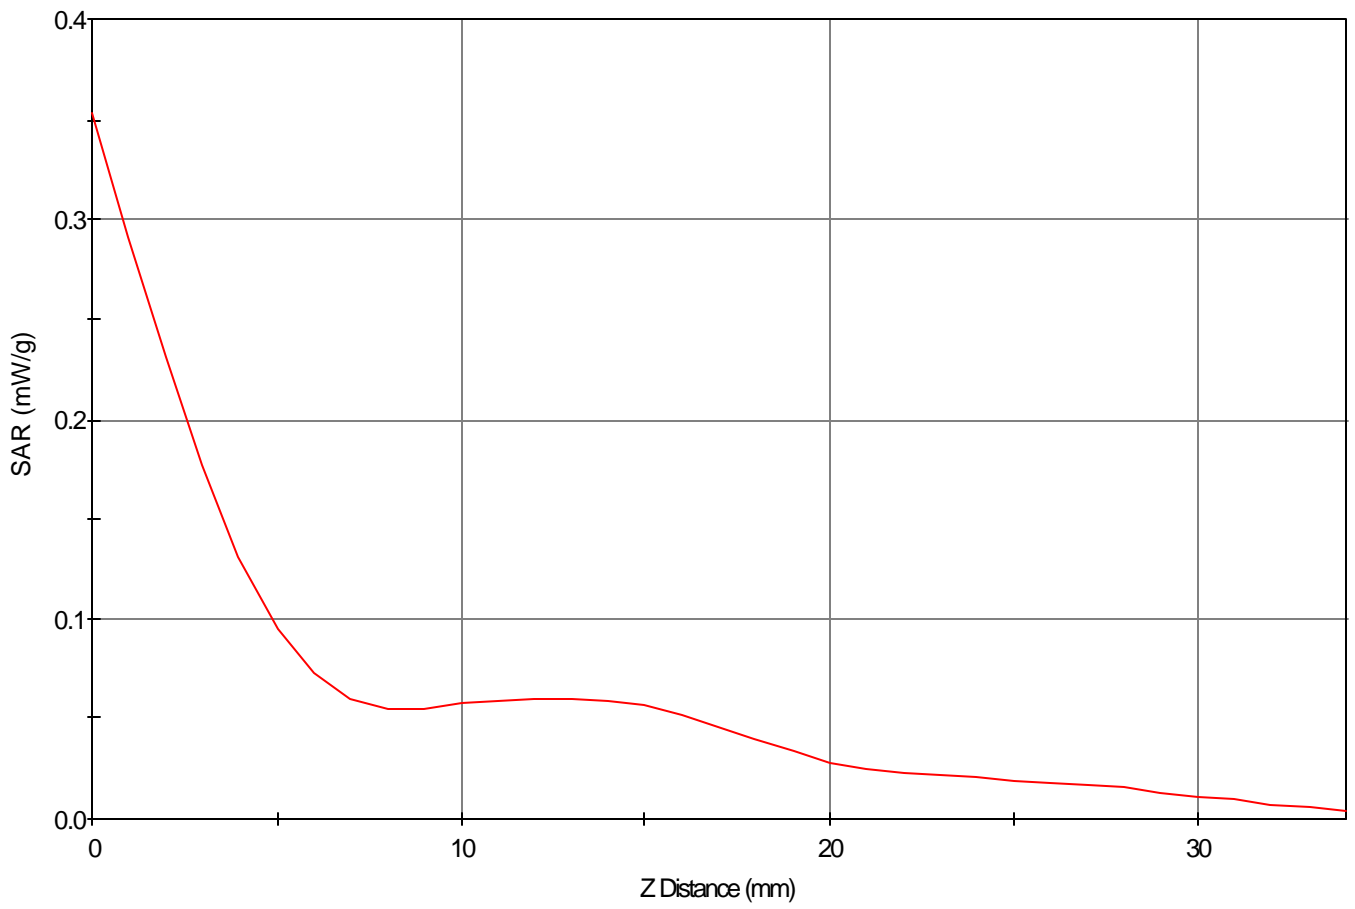

# 1g SAR Values

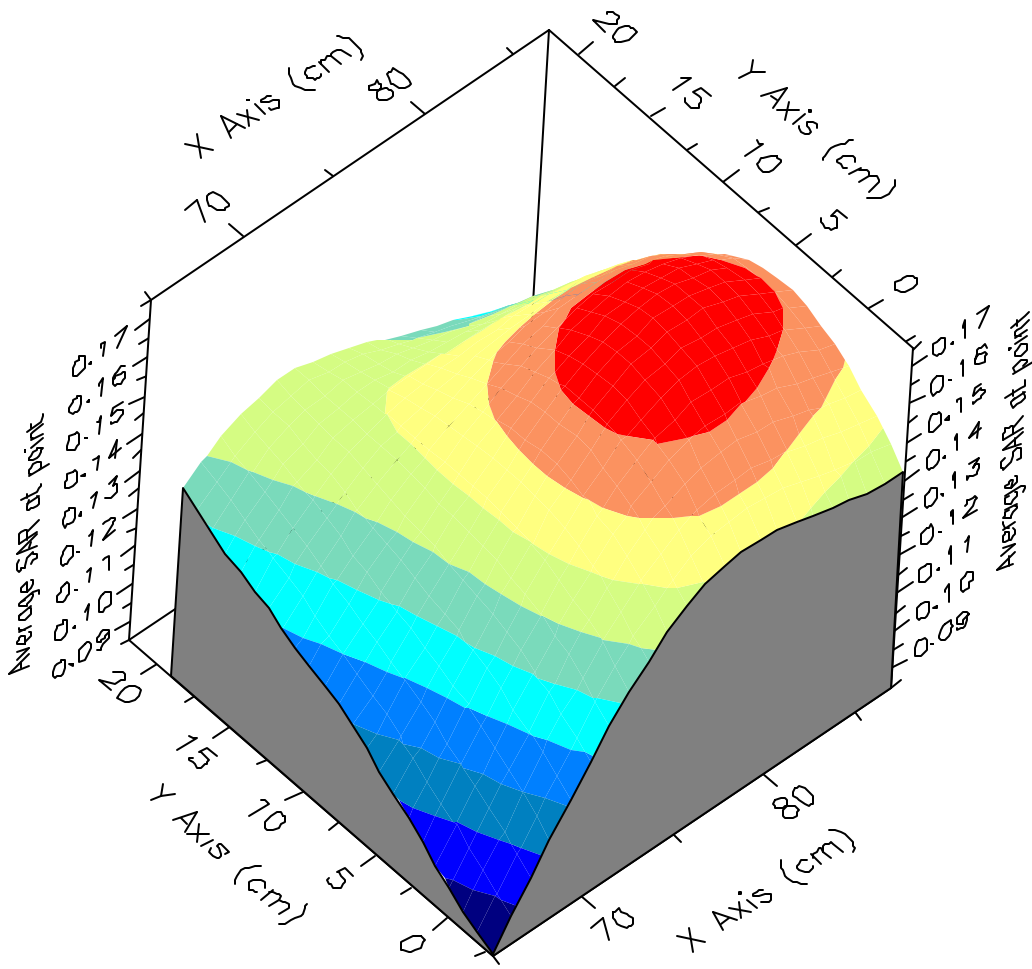

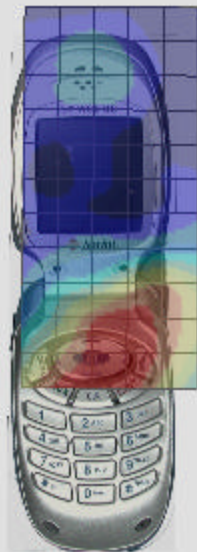

SAR Data Report 02032707

Start : 27-Mar-02 04:44:45 pm  
End : 27-Mar-02 04:57:19 pm  
Code Version : 4.08  
Robot Version: 4.08

Product Data:

Type : SAMSUNG  
Model Number : SPH-A500  
Serial Number : 2  
Frequency : 836.49 MHz  
Transmit Pwr : 0.400 W  
Antenna Type : Helical  
Antenna Posn. : In

Measurement Data:

Phantom Name : SAM-FLAT  
Phantom Type : Uniphantom  
Tissue Type : Muscle  
Tissue Dielectric : 55.540  
Tissue Conductivity : 0.990  
Tissue Density : 1.000  
Robot Name : CRS

Probe Data:

Probe Name : PCT002  
Probe Type : E Fld Triangle  
Frequency : 835 MHz  
Tissue Type : Muscle  
Calibrated Dielectric : 55.700  
Calibrated Conductivity : 0.990  
Calibrated Density : 1.000  
Probe Offset : 2.400 mm  
Conversion Factor : 4.900  
Probe Sensitivity : 3.597 3.474 3.049 mV/(mW/cm^2)  
Amplifier Gains : 20.00 20.00 20.00

Sample:

Rate: 6000 Samples/Sec  
Count: 100 Samples  
NIDAQ Gain: 5

Comments:

AMPS Mode CH-0383  
BODY  
CF=1; Amb. Temp= 21.4 'C; Liq. Temp=21.3 'C


Area Scan - Max Peak SAR Value at x=5.0 y=-14.0 = 0.60 W/kg

Zoom Scan - Max Peak SAR Value at x=6.0 y=-12.0 z=0.0 = 0.90 W/kg


Max 1g SAR at x=6.0 y=-13.0 z=0.0 = 0.62 W/kg


Max 10g SAR at x=7.0 y=-15.0 z=0.0 = 0.42 W/kg

SAR - Z Axis  
at Hotspot x:6.0 y:-12.0

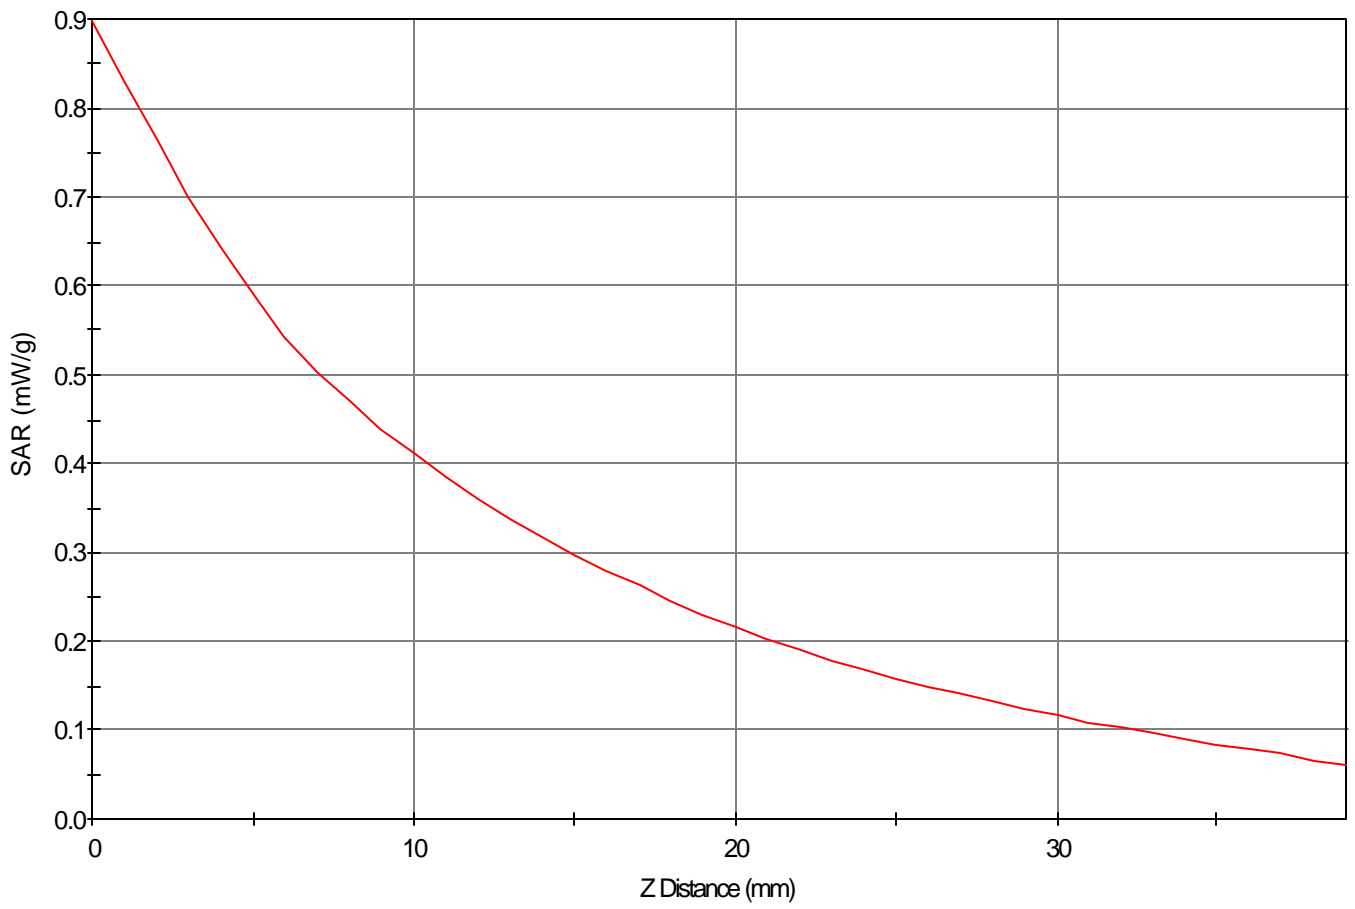

1g SAR Values

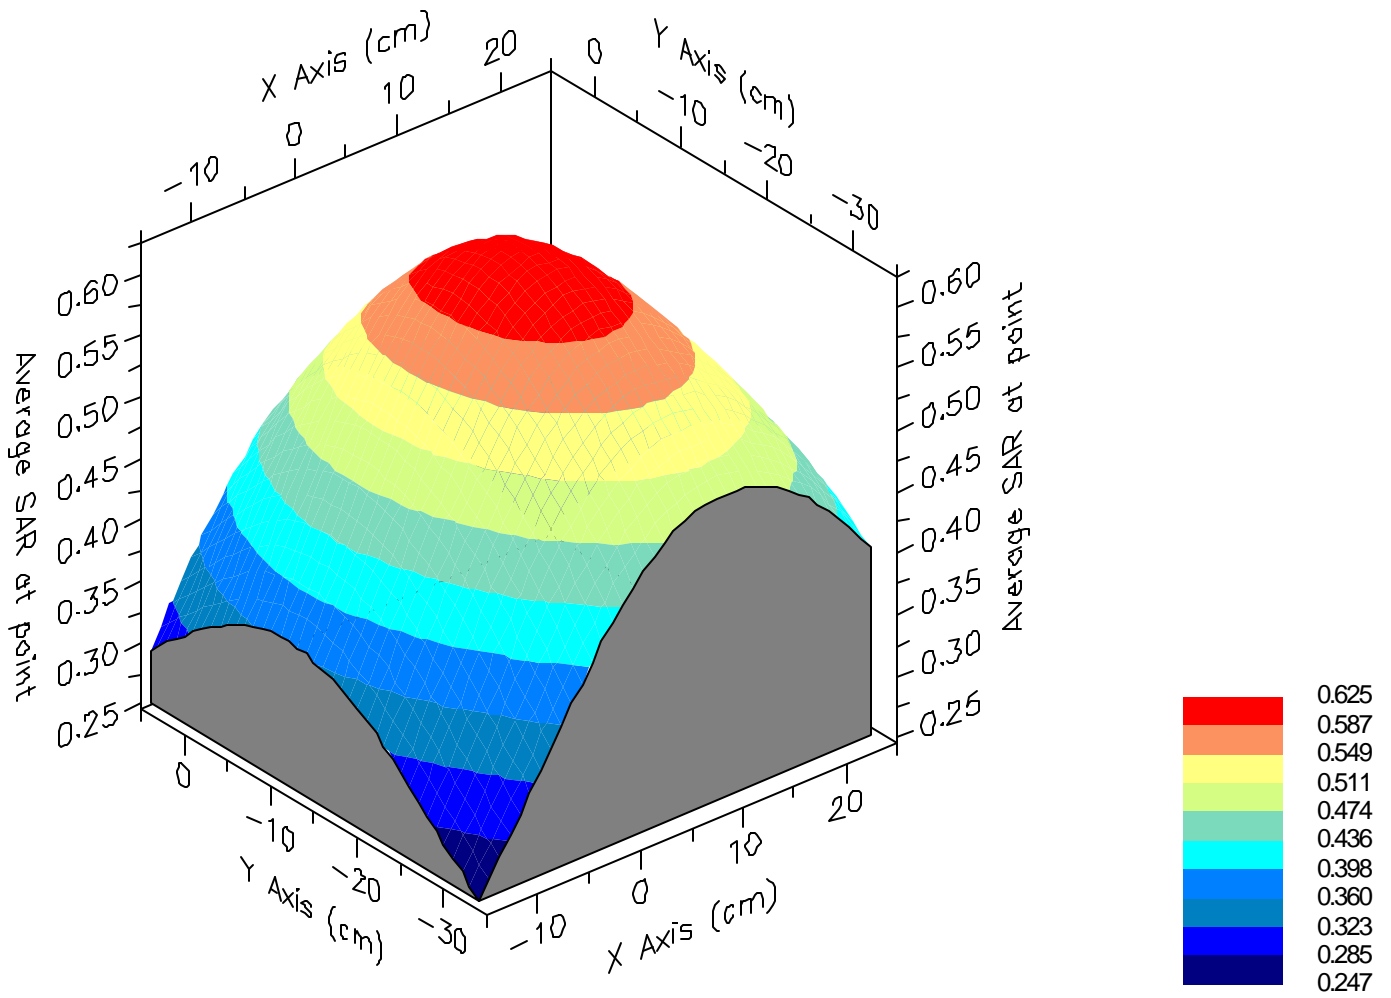

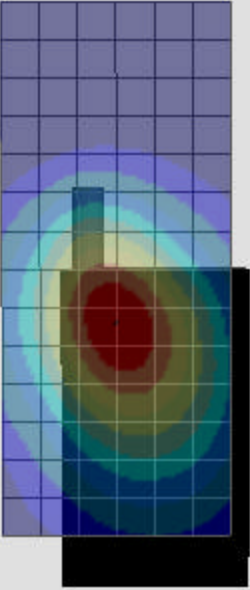

SAR Data Report 02032806

Start : 28-Mar-02 10:57:27 am  
End : 28-Mar-02 11:09:22 am  
Code Version : 4.08  
Robot Version: 4.08

Product Data:

Type : SAMSUNG  
Model Number : SPH-A500  
Serial Number : 3  
Frequency : 836.49 MHz  
Transmit Pwr : 0.355 W  
Antenna Type : Helical  
Antenna Posn. : In

Measurement Data:

Phantom Name : SAM-FLAT  
Phantom Type : Uniphantom  
Tissue Type : Muscle  
Tissue Dielectric : 55.540  
Tissue Conductivity : 0.990  
Tissue Density : 1.000  
Robot Name : CRS

Probe Data:

Probe Name : PCT002  
Probe Type : E Fld Triangle  
Frequency : 835 MHz  
Tissue Type : Muscle  
Calibrated Dielectric : 55.700  
Calibrated Conductivity : 0.990  
Calibrated Density : 1.000  
Probe Offset : 2.400 mm  
Conversion Factor : 4.900  
Probe Sensitivity : 3.597 3.474 3.049 mV/(mW/cm^2)  
Amplifier Gains : 20.00 20.00 20.00

Sample:

Rate: 6000 Samples/Sec  
Count: 100 Samples  
NIDAQ Gain: 5

Comments:

CDMA Mode CH-0383  
BODY  
CF=1; Amb. Temp= 21.8 'C; Liq. Temp=21.5 'C


Area Scan - Max Peak SAR Value at x=4.0 y=-15.0 = 0.52 W/kg

Zoom Scan - Max Peak SAR Value at x=3.0 y=-9.0 z=0.0 = 0.73 W/kg


Max 1g SAR at x=4.0 y=-13.0 z=0.0 = 0.53 W/kg


Max 10g SAR at x=5.0 y=-15.0 z=0.0 = 0.35 W/kg

SAR - Z Axis  
at Hotspot x:3.0 y:-9.0

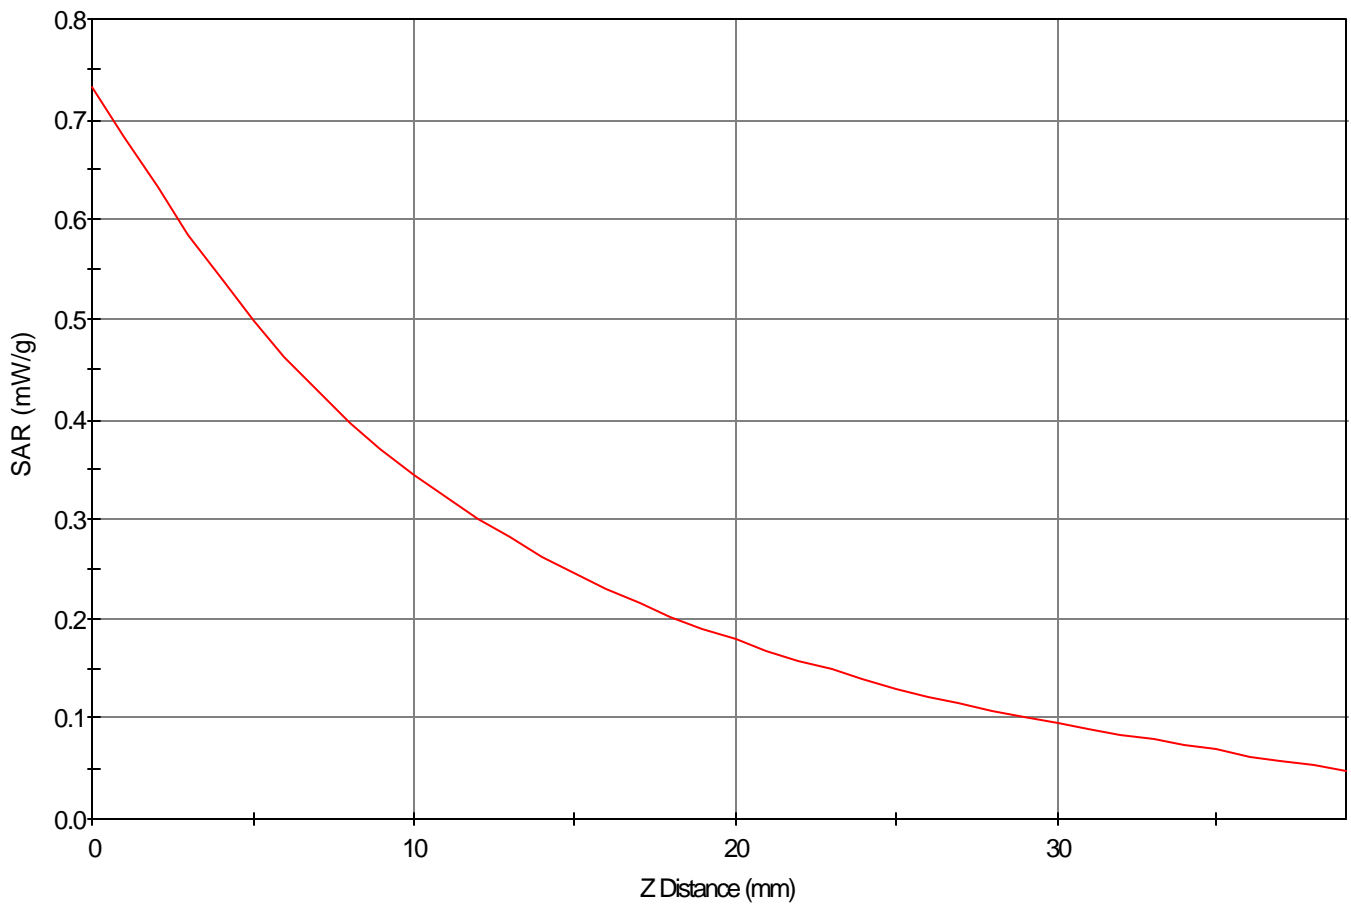

### 1g SAR Values

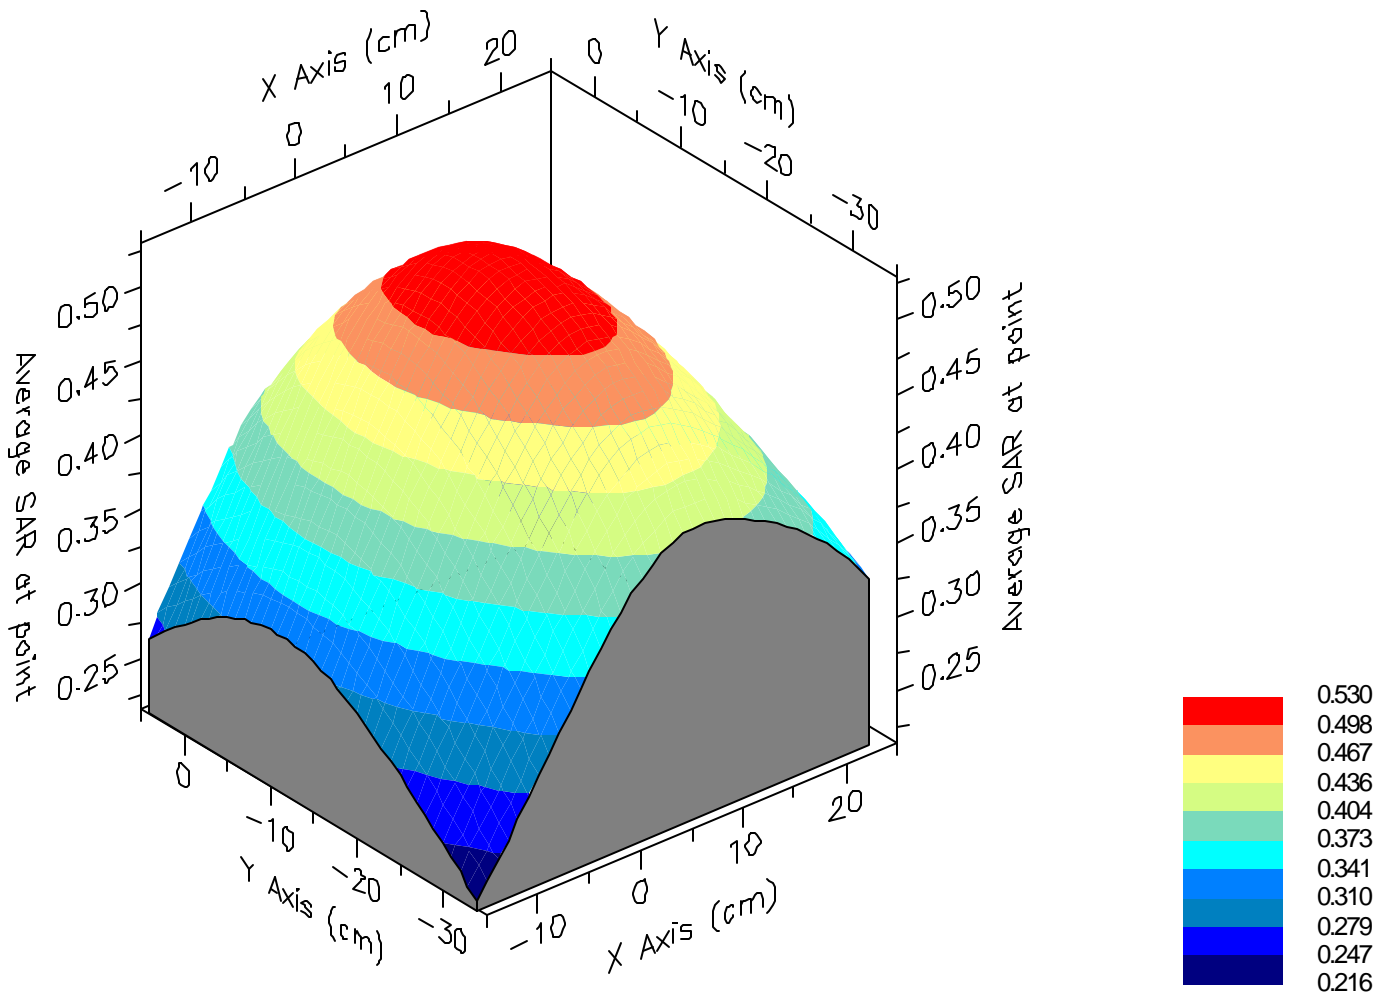

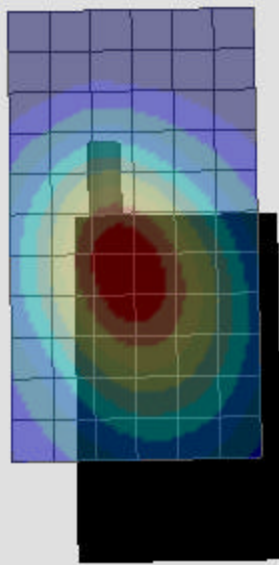

SAR Data Report 02040819

Start : 8-Apr-02 06:10:32 pm  
End : 8-Apr-02 06:23:03 pm  
Code Version : 4.08  
Robot Version: 4.08

Product Data:

Type : SAMSUNG  
Model Number : SPH-A500  
Serial Number : 2  
Frequency : 1908.75 MHz  
Transmit Pwr : 0.280 W  
Antenna Type : Helical  
Antenna Posn. : In

Measurement Data:

Phantom Name : SAM-FLAT  
Phantom Type : Uniphantom  
Tissue Type : Muscle  
Tissue Dielectric : 53.950  
Tissue Conductivity : 1.530  
Tissue Density : 1.000  
Robot Name : CRS

Probe Data:

Probe Name : PCT002  
Probe Type : E Fld Triangle  
Frequency : 1900 MHz  
Tissue Type : Muscle  
Calibrated Dielectric : 53.900  
Calibrated Conductivity : 1.480  
Calibrated Density : 1.000  
Probe Offset : 2.400 mm  
Conversion Factor : 4.500  
Probe Sensitivity : 3.000 2.995 2.653 mV/(mW/cm^2)  
Amplifier Gains : 20.00 20.00 20.00

Sample:

Rate: 6000 Samples/Sec  
Count: 100 Samples  
NIDAQ Gain: 5

Comments:

PCS CH-1175  
Body  
CF=1; Amb. Temp= 21.1 'C; Liq. Temp=21.0 'C


Area Scan - Max Peak SAR Value at x=-5.0 y=-9.0 = 0.27 W/kg

Zoom Scan - Max Peak SAR Value at x=-5.0 y=-17.0 z=0.0 = 0.84 W/kg

Max 1g SAR at x=-4.0 y=-15.0 z=0.0 = 0.34 W/kg

Max 10g SAR at x=-4.0 y=-10.0 z=0.0 = 0.18 W/kg

SAR - Z Axis  
at Hotspot x:-5.0 y:-17.0

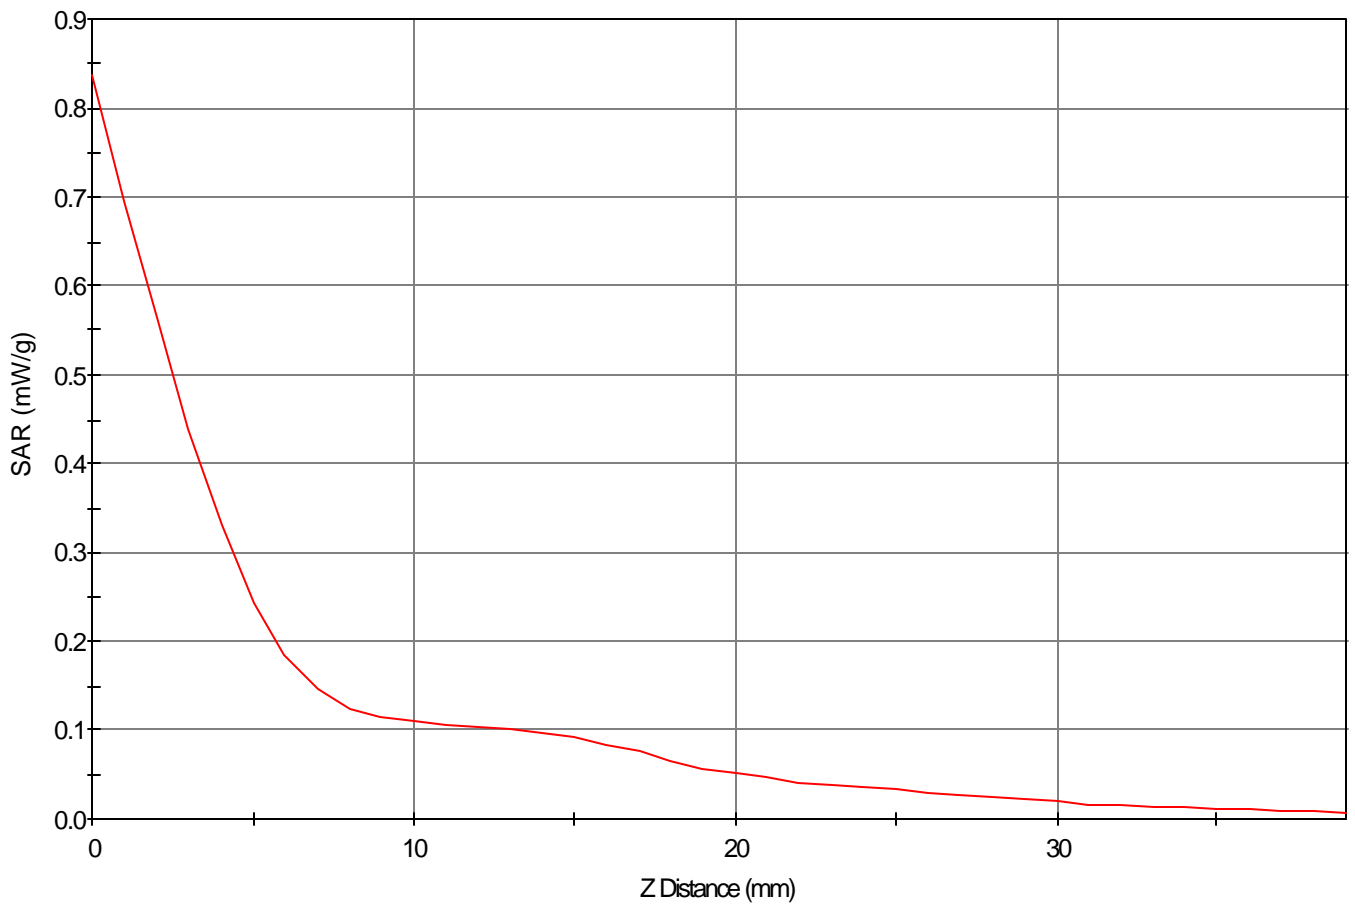

### 1g SAR Values

