



# PCTEST ENGINEERING LABORATORY, INC.

6660-B Dobbin Road, Columbia, MD 21045 USA  
Tel. 410.290.6652 / Fax 410.290.6654  
http://www.pctestlab.com



## MEASUREMENT REPORT FCC Part 15.225 / IC RSS-210 Certification

**Applicant Name:**  
Samsung Electronics, Co. Ltd.  
18600 Broadwick St.  
Rancho Dominguez, CA 90220  
United States

**Date of Testing:**  
02/02/12 - 03/06/12  
**Test Site/Location:**  
PCTEST Lab, Columbia, MD, USA  
**Test Report Serial No.:**  
0Y1201230117.A3L


<b>FCC ID:</b>	<b>A3LSPHL700</b>
<b>APPLICANT:</b>	<b>Samsung Electronics, Co. Ltd.</b>

**Model(s):** SPH-L700  
**EUT Type:** Portable Handset  
**Frequency:** 13.56MHz  
**FCC Classification:** Low Power Communications Device Transmitter (DXX)  
**FCC Rule Part(s):** FCC Part 15 Subpart C (15.225)  
**IC Specification(s):** RSS-210 Issue 8



The device bearing the FCC Identifier specified above has been shown to comply with the applicable technical standards as indicated in the measurement report and has been tested in accordance with the measurement procedures specified in ANSI C63.4-2003 (See Test Report). These measurements were performed with no deviation from the standards. Test results reported herein relate only to the item(s) tested.

I authorize and attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

*NVLAP accreditation does not constitute any product endorsement by NVLAP or any agency of the United States Government. This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government. PCTEST certifies that no party to this application has been subject to a denial of Federal benefits that includes FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C. 862.*



  
Randy Ortanez  
President



<b>FCC ID:</b> A3LSPHL700		<b>FCC Pt. 15.225 MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1201230117.A3L	<b>Test Date(s):</b> 02/02/12 - 03/06/12	<b>EUT Type:</b> Portable Handset	Page 1 of 23	

# TABLE OF CONTENTS

FCC Part 15.225 MEASUREMENT REPORT.....		3
1.0 INTRODUCTION.....		4
1.1 SCOPE.....		4
1.2 PCTEST TEST LOCATION.....		4
2.0 PRODUCT INFORMATION.....		5
2.1 EQUIPMENT DESCRIPTION.....		5
2.2 DEVICE CAPABILITIES.....		5
2.3 OPERATION MODE.....		5
2.4 EMI SUPPRESSION DEVICE(S)/MODIFICATIONS.....		5
2.5 LABELING REQUIREMENTS.....		5
3.0 DESCRIPTION OF TEST.....		6
3.1 EVALUATION PROCEDURE.....		6
3.2 CONDUCTED EMISSIONS.....		6
3.3 RADIATED EMISSIONS.....		7
4.0 ANTENNA REQUIREMENTS.....		8
5.0 SAMPLE CALCULATIONS.....		9
5.1 CONDUCTED EMISSION MEASUREMENT SAMPLE CALCULATION.....		9
5.2 RADIATED EMISSION MEASUREMENT SAMPLE CALCULATION.....		9
6.0 TEST EQUIPMENT CALIBRATION DATA.....		10
7.0 ENVIRONMENTAL CONDITIONS.....		11
8.0 TEST DATA.....		12
8.1 SUMMARY.....		12
8.2 20DB BANDWIDTH MEASUREMENT.....		13
8.3 IN-BAND RADIATED SPURIOUS EMISSION MEASUREMENTS.....		14
8.4 RADIATED SPURIOUS EMISSION MEASUREMENTS, OUT-OF-BAND.....		15
RADIATED SPURIOUS EMISSION MEASUREMENTS, OUT-OF-BAND (CONT'D).....		16
8.5 LINE CONDUCTED MEASUREMENT DATA.....		17
8.6 FREQUENCY STABILITY TEST DATA.....		21
9.0 CONCLUSION.....		23

<b>FCC ID:</b> A3LSPHL700		<b>FCC Pt. 15.225 MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1201230117.A3L	<b>Test Date(s):</b> 02/02/12 - 03/06/12	<b>EUT Type:</b> Portable Handset	Page 2 of 23	



# MEASUREMENT REPORT

## FCC Part 15.225



### § 2.1033 General Information



**APPLICANT:** Samsung Electronics, Co. Ltd.  
**APPLICANT ADDRESS:** 18600 Broadwick St.  
 Rancho Dominguez, CA 90220  
 United States  
**TEST SITE:** PCTEST ENGINEERING LABORATORY, INC.  
**TEST SITE ADDRESS:** 6660-B Dobbin Road, Columbia, MD 21045 USA  
**FCC RULE PART(S):** Part 15 Subpart C (15.225)  
**IC SPECIFICATION(S):** RSS-210 Issue 8  
**MODEL:** SPH-L700  
**FCC ID:** A3LSPHL700  
**Test Device Serial No.:** EMC #4       Production     Pre-Production     Engineering  
**FCC CLASSIFICATION:** Low Power Communications Device Transmitter (DXX)  
**DATE(S) OF TEST:** 02/02/12 - 03/06/12  
**TEST REPORT S/N:** 0Y1201230117.A3L

### Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab located in Columbia, MD 21045, U.S.A.



- PCTEST facility is an FCC registered (PCTEST Reg. No. 90864) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules and Industry Canada (IC-2451).
- PCTEST Lab is accredited to ISO 17025 by U.S. National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP Lab code: 100431-0) in EMC, FCC and Telecommunications.
- PCTEST Lab is accredited to ISO 17025-2005 by the American Association for Laboratory Accreditation (A2LA) in Specific Absorption Rate (SAR) testing, Hearing Aid Compatibility (HAC) testing, CTIA Test Plans, and wireless testing for FCC and Industry Canada Rules.
- PCTEST Lab is a recognized U.S. Conformity Assessment Body (CAB) in EMC and R&TTE (n.b. 0982) under the U.S.-EU Mutual Recognition Agreement (MRA).
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC Guide 65 by the American National Standards Institute (ANSI) in all scopes of FCC Rules and Industry Canada Standards (RSS).
- PCTEST facility is an IC registered (IC-2451) test laboratory with the site description on file at Industry Canada.
- PCTEST is a CTIA Authorized Test Laboratory (CATL) for AMPS, CDMA, and EvDO wireless devices and for Over-the-Air (OTA) Antenna Performance testing for AMPS, CDMA, GSM, GPRS, EGPRS, UMTS (W-CDMA), CDMA 1xEVDO, and CDMA 1xRTT.

<b>FCC ID:</b> A3LSPHL700		<b>FCC Pt. 15.225 MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1201230117.A3L	<b>Test Date(s):</b> 02/02/12 - 03/06/12	<b>EUT Type:</b> Portable Handset	Page 3 of 23	

# 1.0 INTRODUCTION

## 1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

## 1.2 PCTEST Test Location

The map below shows the location of the PCTEST LABORATORY, its proximity to the FCC Laboratory, the Columbia vicinity, the Baltimore-Washington Intern't'l (BWI) airport, the city of Baltimore and the Washington, DC area. (see Figure 1-1).

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility in New Concept Business Park, Guilford Industrial Park, Columbia, Maryland. The site address is 6660-B Dobbin Road, Columbia, MD 21045. The test site is one of the highest points in the Columbia area with an elevation of 390 feet above mean sea level. The site coordinates are 39° 11'15" N latitude and 76° 49'38" W longitude. The facility is 1.5 miles North of the FCC laboratory, and the ambient signal and ambient signal strength are approximately equal to those of the FCC laboratory. There are no FM or TV transmitters within 15 miles of the site. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2003 on January 28, 2009.

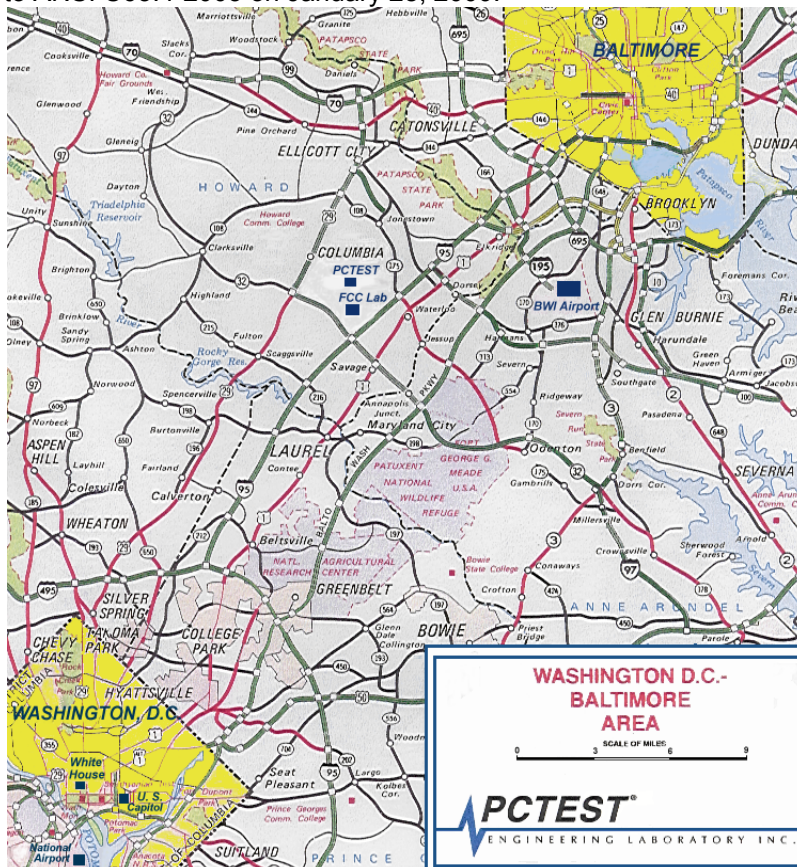


Figure 1-1. Map of the Greater Baltimore and Metropolitan Washington, D.C. area

FCC ID: A3LSPHL700		FCC Pt. 15.225 MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1201230117.A3L	Test Date(s): 02/02/12 - 03/06/12	EUT Type: Portable Handset		Page 4 of 23

## 2.0 PRODUCT INFORMATION

### 2.1 Equipment Description

The Equipment Under Test (EUT) is the **Samsung Portable Handset FCC ID: A3LSPHL700**. The test data contained in this report pertains only to the emissions due to the RFID transmitter of the EUT.

Manufacturer / Model	FCC ID	Description
Samsung / Model: SPH-L700	A3LSPHL700	Portable Handset

**Table 2-1. EUT Equipment Description**

### 2.2 Device Capabilities

This device contains the following capabilities:

850/1900 CDMA/EvDO (BC0, BC1, BC10), Band 25 LTE, 802.11a/b/g/n WLAN, 802.11a/n UNII, Bluetooth, NFC

### 2.3 Operation Mode

The Samsung Model: SPH-L700, FCC ID: A3LSPHL700 was set to continuously transmit at 13.56MHz. This was performed using manufacturer software loaded on the phone to allow for continuous transmission. Please see Section 8.0 for more information on the test setup.

### 2.4 EMI Suppression Device(s)/Modifications



No EMI suppression device(s) were added and no modifications were made during testing.

### 2.5 Labeling Requirements

Per 15.19; Docket 95-19

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase. However, when the device is so small wherein placement of the label with specified statement is not practical, only the trade name and FCC ID must be displayed on the device per Section 15.19(b)(2).

Please see attachment for FCC ID label and label location.

FCC ID: A3LSPHL700		FCC Pt. 15.225 MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1201230117.A3L	Test Date(s): 02/02/12 - 03/06/12	EUT Type: Portable Handset	Page 5 of 23	


## 3.0 DESCRIPTION OF TEST

### 3.1 Evaluation Procedure


The measurement procedure described in the American National Standard for Methods of Measurement of Radio-Noise Emission from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40GHz (ANSI C63.4-2003) was used in the measurement of the **Samsung Portable Handset** FCC ID: A3LSPHL700.

Deviation from measurement procedure.....None


### 3.2 Conducted Emissions




**Figure 3-1. Shielded Enclosure Line-Conducted Test Facility**



**Figure 3-2. Line Conducted Emission Test Set-Up**

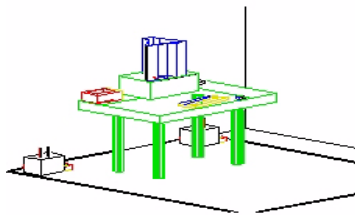

**Figure 3-3. Wooden Table & Bonded LISNs**



**Figure 3-4. LISN Schematic Diagram**

The line-conducted facility is located inside a 16'x20'x10' shielded enclosure, manufactured by Ray Proof Series 81 (see Figure 3-1). The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-5. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 1.5m away from the sidewall of the shielded room (see Figure 3-2). Solar Electronics and EMCO Model 3725/2 (10kHz-30MHz) 50Ω/50μH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room (see Figure 3-3). The EUT is powered from the Solar LISN and the support equipment is powered from the EMCO LISN. Power to the LISNs are filtered by a high-current high-insertion loss Ray Proof power line filter (100dB 14Hz-10GHz). The purpose of the filter is to attenuate ambient signal interference and this filter is also bonded to the shielded enclosure. All electrical cables are shielded by braided tinned copper zipper tubing with an inner diameter of ½". If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the Solar LISN. The LISN schematic diagram is shown (see Figure 3-4). All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion). Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer to determine the frequency producing the maximum EME from the EUT.

The spectrum was scanned from 150kHz to 30MHz with a spectrum analyzer. The detector function was set to CISPR quasi-peak and average mode. The bandwidth of the analyzer was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each EME emission. Each emission was maximized by: switching power lines; varying the mode of operation or resolution; clock or data exchange speed; scrolling H pattern to the EUT and/or support equipment, and powering the monitor from the floor mounted outlet box and the computer aux AC outlet, if applicable; whichever determined the worst-case emission. Photographs of the worst-case emission can be seen in the test setup photographs. Each EME reported was calibrated using the Agilent E8257D (250kHz – 20GHz) PSG Signal Generator.

FCC ID: A3LSPHL700	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.225 MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1201230117.A3L	Test Date(s): 02/02/12 - 03/06/12	EUT Type: Portable Handset		Page 6 of 23

### 3.3 Radiated Emissions

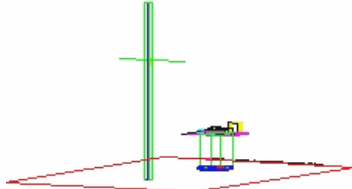


Figure 3-5. 3-Meter Test Site




Figure 3-6. Dimensions of Outdoor Test Site

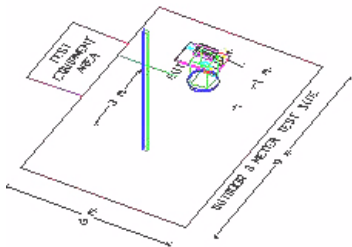


Figure 3-7. Turntable and System Setup

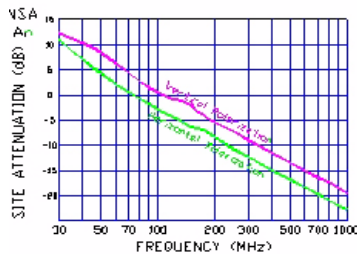


Figure 3-8. Normalized Site Attenuation Curves (H&V)

Preliminary measurements were made in a shielded anechoic chamber at 3-meter using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequency producing the maximum EME. Appropriate precaution was taken to ensure that all EME from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, and turntable azimuth with respect to the antenna was noted for each frequency found. The spectrum was scanned from 30 to 1000 MHz using a biconilog antenna. Above 1 GHz, linearly polarized double ridge horn antennas were used. For measurements below 30MHz a magnetic loop antenna was used.

Final measurements were made outdoors at 3-meter test range using Roberts™ Dipole antennas or horn antennas (see Figure 3-5) for above 30MHz and a loop antenna for below 30MHz. The test equipment was placed on a wooden and plastic bench situated on a 1.5m x 2m area adjacent to the measurement area (see Figure 3-6). Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The detector function was set to CISPR quasi-peak mode and the bandwidth of the spectrum analyzer was set to 100kHz for frequencies below 1GHz or 1MHz for frequencies above 1GHz. Above 1GHz the detector function was set to average mode (RBW = 1MHz, VBW = 10Hz). Emissions below 30MHz were made with a RBW of 10kHz and a VBW of 10Hz.

The half-wave dipole antenna was tuned to the frequency found during preliminary radiated measurements. The EUT, support equipment and interconnecting cables were re-configured to the set-up producing the maximum emission for the frequency and were placed on top of a 0.8-meter high non-metallic 1 x 1.5 meter table (see Figure 3-7). The EUT, support equipment, and interconnecting cables were re-arranged and manipulated to maximize each EME emission. The turntable containing the system was rotated and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by: varying the mode of operation or resolution; clock or data exchange speed; scrolling H pattern to the EUT and/or support equipment, and powering the monitor from the floor mounted outlet box and the computer aux AC outlet, if applicable; and changing the polarity of the antenna, whichever determined the worst-case emission. Photographs of the worst-case emission can be seen in the test setup photographs. Each EME reported was calibrated using the Agilent E8257D (250kHz – 20GHz) PSG Signal Generator. The Theoretical Normalized Site Attenuation Curves for both horizontal and vertical polarization are shown in Figure 3-8.

FCC ID: A3LSPHL700		FCC Pt. 15.225 MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1201230117.A3L	Test Date(s): 02/02/12 - 03/06/12	EUT Type: Portable Handset	Page 7 of 23	

## 4.0 ANTENNA REQUIREMENTS



**Excerpt from §15.203 of the FCC Rules/Regulations:**

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The NFC antenna is located inside the battery of the Samsung Portable Handset and uses a unique coupling to the intentional radiator.
- There are no provisions for connection to an external antenna.

**Conclusion:**

The **Samsung Portable Handset FCC ID: A3LSPHL700** unit complies with the requirement of §15.203.

<b>FCC ID:</b> A3LSPHL700		<b>FCC Pt. 15.225 MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1201230117.A3L	<b>Test Date(s):</b> 02/02/12 - 03/06/12	<b>EUT Type:</b> Portable Handset	Page 8 of 23	

## 5.0 SAMPLE CALCULATIONS

### 5.1 Conducted Emission Measurement Sample Calculation

@ 20.3 MHz

**Class B limit** = 60.0 dB $\mu$ V (Quasi-peak limit)  
 Reading = - 57.8 dBm (calibrated quasi-peak level)  
 Convert to dB $\mu$ V = - 57.8 + 107 = 49.2 dB $\mu$ V  
  
 Margin = 49.2 - 60.0 = - 10.8 dB  
 = **10.8 dB below limit**



### 5.2 Radiated Emission Measurement Sample Calculation

@ 66.7 MHz

**Class B limit** = 100  $\mu$ V/m = 40.0 dB $\mu$ V/m  
 Reading = - 76.0 dBm (calibrated level)  
 Convert to dB $\mu$ V = - 76.0 + 107 = 31.0 dB $\mu$ V  
 Antenna Factor + Cable Loss = 5.8 dB/m  
 Total = 36.8 dB $\mu$ V/m  
  
 Margin = 36.8 - 40.0 = - 3.2 dB  
 = **3.2 dB below limit**

**Note:**

Level [dB $\mu$ V] = 20 log<sub>10</sub> (Level [ $\mu$ V/m])  
 Level [dB $\mu$ V] = Level [dBm] + 107



FCC ID: A3LSPHL700		FCC Pt. 15.225 MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1201230117.A3L	Test Date(s): 02/02/12 - 03/06/12	EUT Type: Portable Handset	Page 9 of 23	

## 6.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST).

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	RE1	Radiated Emissions Cable Set	6/7/2011	Annual	6/7/2012	N/A
Agilent	8447D	Broadband Amplifier	3/17/2011	Annual	3/17/2012	2443A01900
Agilent	E4407B	ESA Spectrum Analyzer	4/5/2011	Annual	4/5/2012	US39210313
Agilent	N9038A	MXE EMI Receiver	8/5/2011	Annual	8/5/2012	MY51210133
Emco	6502	Active Loop Antenna (10k - 30 MHz)	4/8/2010	Biennial	4/8/2012	267
Rohde & Schwarz	ESU26	EMI Test Receiver	4/27/2011	Annual	4/27/2012	100342
Solar Electronics	8012-50-R-24-BNC	LISN	6/23/2011	Biennial	6/23/2013	310233
Sunol	JB5	Bi-Log Antenna (30M - 5GHz)	1/26/2012	Biennial	1/26/2014	A051107

**Table 6-1. Annual Test Equipment Calibration Schedule**



<b>FCC ID:</b> A3LSPHL700		<b>FCC Pt. 15.225 MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1201230117.A3L	<b>Test Date(s):</b> 02/02/12 - 03/06/12	<b>EUT Type:</b> Portable Handset		Page 10 of 23

## 7.0 ENVIRONMENTAL CONDITIONS

The temperature is controlled within range of 15°C to 35°C.

The relative humidity is controlled within range of 10% to 75%.

The atmospheric pressure is controlled within the range 86-106kPa (860-1060mbar).

<b>FCC ID:</b> A3LSPHL700		<b>FCC Pt. 15.225 MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1201230117.A3L	<b>Test Date(s):</b> 02/02/12 - 03/06/12	<b>EUT Type:</b> Portable Handset	Page 11 of 23	



## 8.0 TEST DATA

### 8.1 Summary

Company Name: Samsung Electronics, Co. Ltd.  
 FCC ID: A3LSPHL700  
 Frequencies Examined: 13.56MHz

FCC Part Section(s)	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
<b>TRANSMITTER MODE (Tx)</b>						
15.225 (a)	RSS-210 [A2.6]	In-Band Emissions	15,848 $\mu$ V/m @ 30m 13.553 – 13.567 MHz	RADIATED	PASS	Section 8.3
2.1049	N/A	20 dB Bandwidth	N/A		PASS	Section 8.2
15.225 (b)	RSS-210 [A2.6]	In-Band Emissions	334 $\mu$ V/m @ 30m 13.410 – 13.553 MHz 13.567 – 13.710 MHz		PASS	Section 8.3
15.225 (c)	RSS-210 [A2.6]	In-Band Emissions	106 $\mu$ V/m @ 30m 13.110 – 13.410 MHz 13.710 – 14.010 MHz		PASS	Section 8.3
15.225 (d) 15.209	RSS-210 [A2.6]	Out-of-Band Emissions	Emissions outside of the specified band (13.110 – 14.010 MHz) must meet the radiated limits detailed in 15.209		PASS	Section 8.4
15.225 (e)	RSS-210 [A2.6]	Frequency Stability Tolerance	$\pm$ 0.01% of Operating Frequency	Temperature Chamber	PASS	Section 8.6
15.207	RSS-Gen [7.2.2]	AC Conducted Emissions 150kHz – 30MHz	< FCC 15.207 limits or < RSS-Gen table 2 limits	LINE CONDUCTED	PASS	Section 8.5
<b>RECEIVER MODE (Rx) / DIGITAL DEVICE</b>						
15.107	RSS-Gen [7.2.2]	AC Conducted Emissions 150kHz – 30MHz	< FCC 15.107 limits or < RSS-Gen table 2 limits	LINE CONDUCTED	PASS	Part 15B Test Report

**Table 8-1. Summary of Test Results**

FCC ID: A3LSPHL700		FCC Pt. 15.225 MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1201230117.A3L	Test Date(s): 02/02/12 - 03/06/12	EUT Type: Portable Handset		Page 12 of 23

## 8.2 20dB Bandwidth Measurement

### §2.1049

The 20dB bandwidth is measured with a spectrum analyzer connected via a receive antenna placed near the EUT while the EUT is operating in transmission mode.

Frequency	20dB Bandwidth
13.56MHz	23.7kHz

Table 8-2. 20dB Bandwidth Measurement

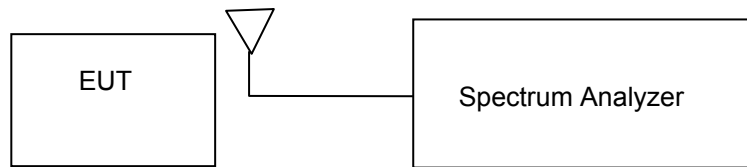


Figure 8-1. Test Instrument & Measurement Setup

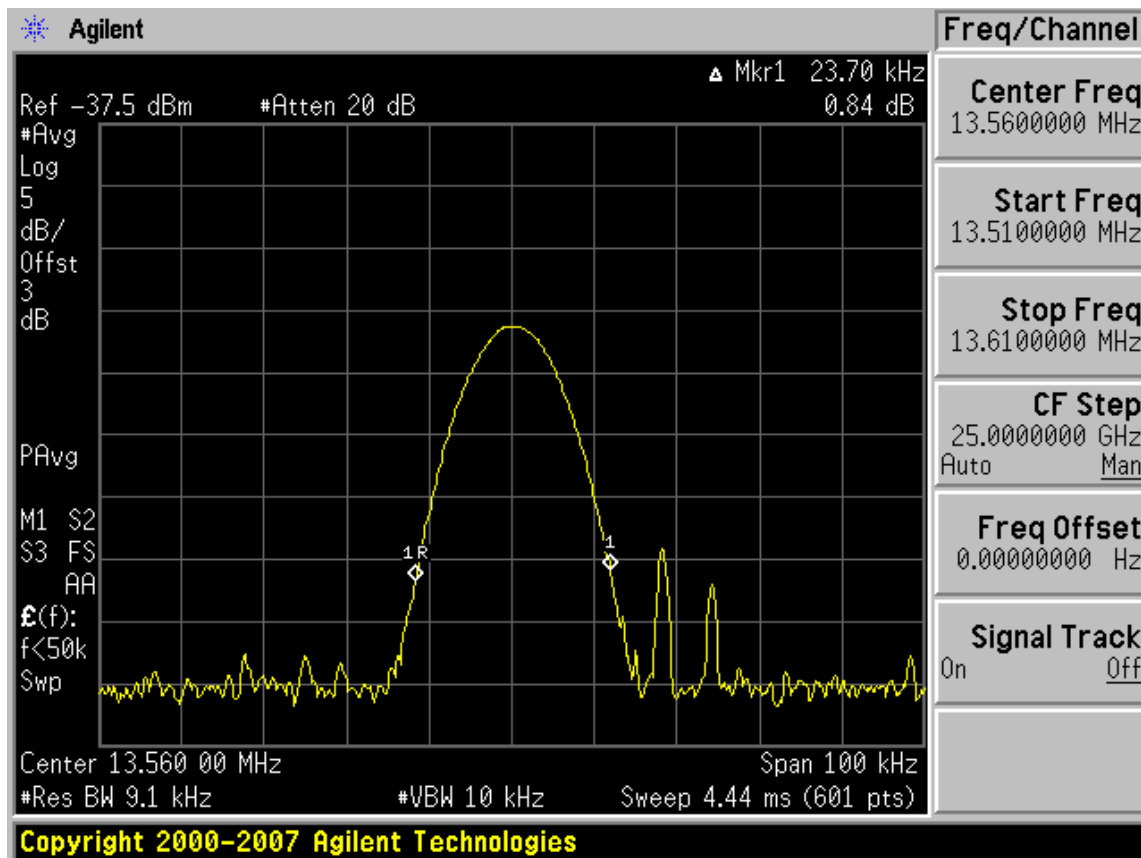


Figure 8-2. 20dB Bandwidth Plot

FCC ID: A3LSPHL700		FCC Pt. 15.225 MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1201230117.A3L	Test Date(s): 02/02/12 - 03/06/12	EUT Type: Portable Handset		Page 13 of 23

### 8.3 In-Band Radiated Spurious Emission Measurements

§15.225(a), (b), (c); RSS-210 [A2.6]

Radiated emissions testing was performed in the band 13.110 – 14.010 MHz.

Frequency: 13.56MHz

Measurement Distance: 3 Meters

Frequency [MHz]	Level [dBm]	AFCL [dB]	Antenna Position	Pol [H/V]	3m Field Strength [dBµV/m]	30m Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
13.140	-87.06	10.42	X	V	30.36	-9.64	40.51	-50.15
13.348	-88.26	10.42	X	V	29.16	-10.84	40.51	-51.35
13.490	-88.18	10.42	X	V	29.24	-10.76	50.47	-61.23
13.560	-67.56	10.42	X	V	49.86	9.86	84.00	-74.14
13.590	-90.43	10.42	X	V	26.99	-13.01	50.47	-63.48
13.620	-91.69	10.42	X	V	25.73	-14.27	50.47	-64.74
13.770	-91.05	10.42	X	V	26.37	-13.63	40.51	-54.14



**Table 8-3. In-Band Radiated Measurements**

**NOTES:**

1. All measurements were performed using a loop antenna. The antenna was positioned in three orthogonal positions (X front, Y side, Z top) and the position with the highest emission level was recorded.
2. Measurements were performed at 3m and the data was extrapolated to the specified measurement distance of 30m using the square of an inverse linear distance extrapolation factor (40 dB/decade) as specified in §15.31(f)(2).

$$\text{Extrapolation Factor} = 20 \log_{10}(30/3)^2 = 40\text{dB}$$

3. All measurements were recorded using a spectrum analyzer employing a quasi-peak detector.

FCC ID: A3LSPHL700		FCC Pt. 15.225 MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1201230117.A3L	Test Date(s): 02/02/12 - 03/06/12	EUT Type: Portable Handset	Page 14 of 23	

## 8.4 Radiated Spurious Emission Measurements, Out-of-Band §15.209, §15.225(d); RSS-210 [A2.6]

The EUT was tested from 9kHz up to the 1GHz excluding the band 13.110 – 14.010 MHz. All measurements up to 960MHz were recorded with a spectrum analyzer employing a quasi-peak detector. All out-of-band emissions must not exceed the limits shown in Table 8-4 per Section 15.209. A loop antenna was used to investigate emissions below 30MHz.

Frequency	Field Strength [ $\mu\text{V/m}$ ]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3



**Table 8-4. Radiated Limits – Out of band**

### Sample Calculation

- Field Strength Level  $_{[\text{dB}\mu\text{V/m}]}$  = Analyzer Level  $_{[\text{dBm}]} + 107 + \text{AFCL} \text{ }_{[\text{dB}]} + \text{Duty Cycle Correction} \text{ }_{[\text{dB}]}$

### Notes:

- AFCL = Antenna Factor  $_{[\text{dB}]} + \text{Cable Loss} \text{ }_{[\text{dB}]}$

FCC ID: A3LSPHL700		FCC Pt. 15.225 MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1201230117.A3L	Test Date(s): 02/02/12 - 03/06/12	EUT Type: Portable Handset	Page 15 of 23	

**Radiated Spurious Emission Measurements, Out-of-Band (Cont'd)**  
§15.209, §15.225(d); RSS-210 [A2.6]

Tx Frequency 13.56MHz



Measurement Distance: 3 Meters

Frequency [MHz]	Level [dBm]	AFCL [dB]	Pol [H/V]	3m Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
27.12	-89.94	8.68	V	25.74	69.54	-43.80
40.68	-94.53	9.71	V	22.18	40.00	-17.82
54.24	-95.12	10.28	V	22.15	40.00	-17.85
67.80	-97.21	10.81	V	20.60	40.00	-19.40
81.36	-96.65	11.28	V	21.63	40.00	-18.37
94.92	-95.87	11.94	V	23.06	40.00	-16.94

**Table 8-5. Radiated Measurements**

**NOTES:**

1. All measurements were recorded using a spectrum analyzer employing a quasi-peak detector for emissions below 960MHz.
2. Both Vertical and Horizontal polarities of the receive antenna were evaluated with the worst case emissions being reported. Below 30MHz the Loop antenna was positioned in three orthogonal positions (X front, Y side, Z top) and the position with the highest emission level was recorded.
3. The EUT is supplied with nominal AC voltage and/or a new/fully-recharged battery.
4. The spectrum is measured from 9kHz to the 10<sup>th</sup> harmonic and the worst-case emissions are reported.

FCC ID: A3LSPHL700		FCC Pt. 15.225 MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1201230117.A3L	Test Date(s): 02/02/12 - 03/06/12	EUT Type: Portable Handset	Page 16 of 23	


## 8.5 Line Conducted Measurement Data

§15.207; RSS-Gen (7.2.2)

# PCTEST Engineering Laboratory Inc.

Company : Samsung Electronics, Co. Ltd.  
 Model Number : SPH-L700  
 FCC ID Code : A3LSPHL700  
 Standard : FCC Part 15C, 15.207

Power Source : AC120V/60Hz  
 Tested Date : 03/06/2012  
 Note : Tested with RFID On

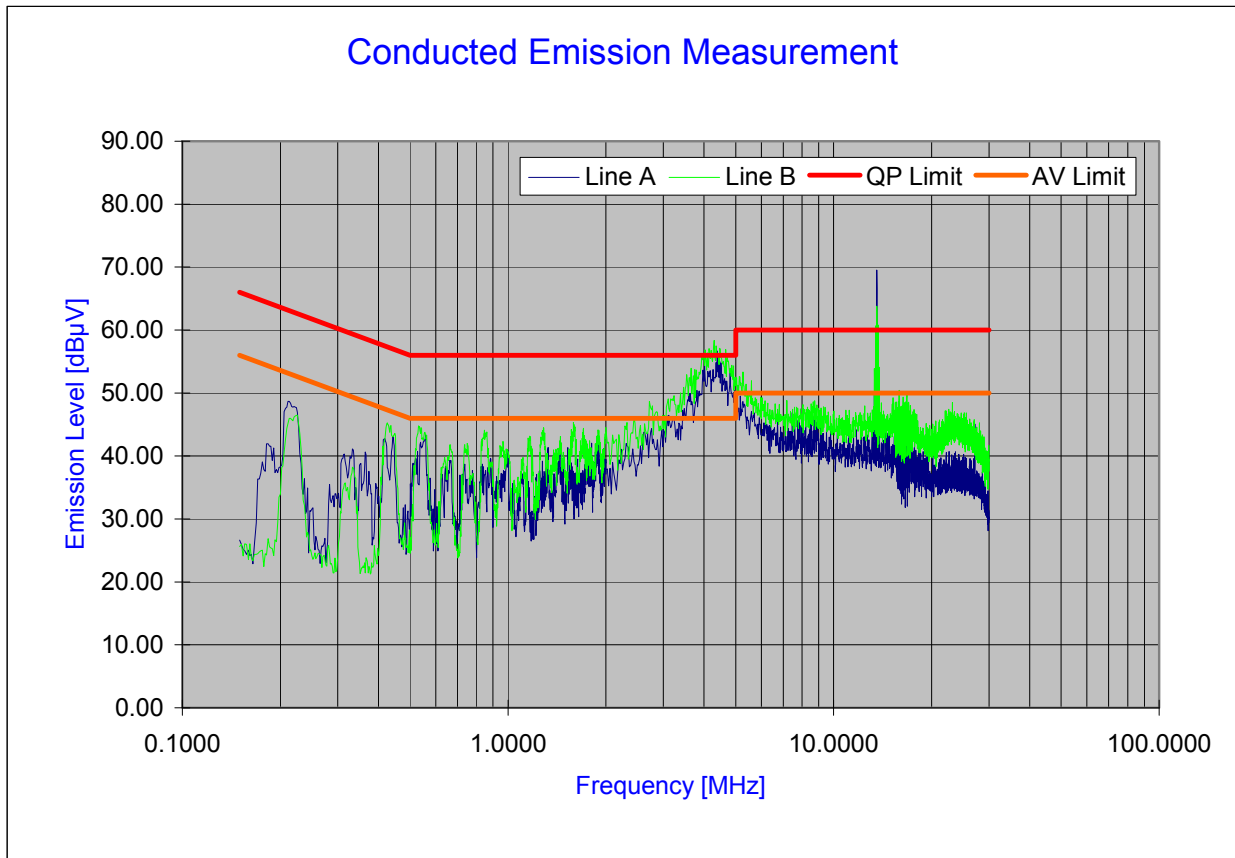



Ver.1.1 ©PCTEST 2006.08

Plot 8-1. Line-Conducted Test Plot

**Notes:**

1. All Modes of operation were investigated and the worst-case emissions are reported.
2. The limit for intentional radiator devices from 150k to 30MHz is specified in Section 15.207 of the Title 47 CFR.
3. Line A = Phase; Line B = Neutral
4. Traces shown in plot are made using a peak detector.
5. Deviations to the Specifications: None.

FCC ID: A3LSPHL700		FCC Pt. 15.225 MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1201230117.A3L	Test Date(s): 02/02/12 - 03/06/12	EUT Type: Portable Handset		Page 17 of 23

## Line Conducted Measurement Data (Cont'd)



### §15.207; RSS-Gen (7.2.2)

No.	Line	Frequency [MHz]	Factor [dB]	QP [dBμV]	Limit [dBμV]	Margin [dB]	Average [dBμV]	Limit [dBμV]	Margin [dB]
1	A	2.755	7.24	35.32	56.00	-20.68	24.76	46.00	-21.24
2	A	3.205	7.28	37.17	56.00	-18.83	27.65	46.00	-18.35
3	A	3.648	7.32	40.42	56.00	-15.58	31.29	46.00	-14.71
4	A	4.105	7.35	45.33	56.00	-10.67	35.11	46.00	-10.89
5	A	4.427	7.38	44.67	56.00	-11.33	36.10	46.00	-9.90
6	A	4.765	7.40	42.46	56.00	-13.54	33.14	46.00	-12.86
7	A	5.248	7.42	40.44	60.00	-19.56	30.11	50.00	-19.89
8	A	13.342	7.92	42.42	60.00	-17.58	25.86	50.00	-24.14
9	A	13.560	7.94	63.34	60.00	3.34	61.90	50.00	11.90
10	A	13.782	7.97	42.13	60.00	-17.87	25.52	50.00	-24.48
11	B	2.782	7.25	38.82	56.00	-17.18	27.19	46.00	-18.81
12	B	3.614	7.33	43.81	56.00	-12.19	34.31	46.00	-11.69
13	B	4.330	7.38	48.91	56.00	-7.09	39.87	46.00	-6.13
14	B	5.238	7.44	42.67	60.00	-17.33	32.60	50.00	-17.40
15	B	5.581	7.46	40.69	60.00	-19.31	32.22	50.00	-17.78
16	B	13.349	7.97	47.92	60.00	-12.08	30.68	50.00	-19.32
17	B	13.454	7.98	53.78	60.00	-6.22	33.48	50.00	-16.52
18	B	13.560	7.99	63.68	60.00	3.27	62.22	50.00	12.22
19	B	13.666	8.00	52.87	60.00	-7.13	31.89	50.00	-18.11
20	B	13.770	8.01	47.19	60.00	-12.81	30.84	50.00	-19.16

**Table 8-6. Line-Conducted Test Data**

#### Notes:


- All Modes of operation were investigated and the worst-case emissions are reported.
- The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
- Line A = Phase; Line B = Neutral
- Factor (dB) = Cable loss (dB) + LISN insertion factor (dB)
- QP/AV Level (dBμV) = QP/AV Analyzer/Receiver Level (dBμV) + Factor (dB)
- Margin (dB) = QP/AV Level (dBμV) – Limit (dBμV)
- Traces shown in plot are made using a peak detector.
- Deviations to the Specifications: None.
- The fundamental emission frequency for this configuration is over the limit. In this case, the EUT is retested with the NFC antenna terminated in 50Ω with guidance from TCB Workshop, “**Unlicensed Devices General Technical Requirements**” from 2005.

FCC ID: A3LSPHL700		FCC Pt. 15.225 MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1201230117.A3L	Test Date(s): 02/02/12 - 03/06/12	EUT Type: Portable Handset	Page 18 of 23	

# PCTEST Engineering Laboratory Inc.

Company : Samsung Electronics, Co. Ltd.  
 Model Number : SPH-L700  
 FCC ID Code : A3LSPHL700  
 Standard : FCC Part 15C, 15.207

Power Source : AC120V/60Hz  
 Tested Date : 03/06/2012  
 Note : Tested with RFID on antenna terminated in 50Ω

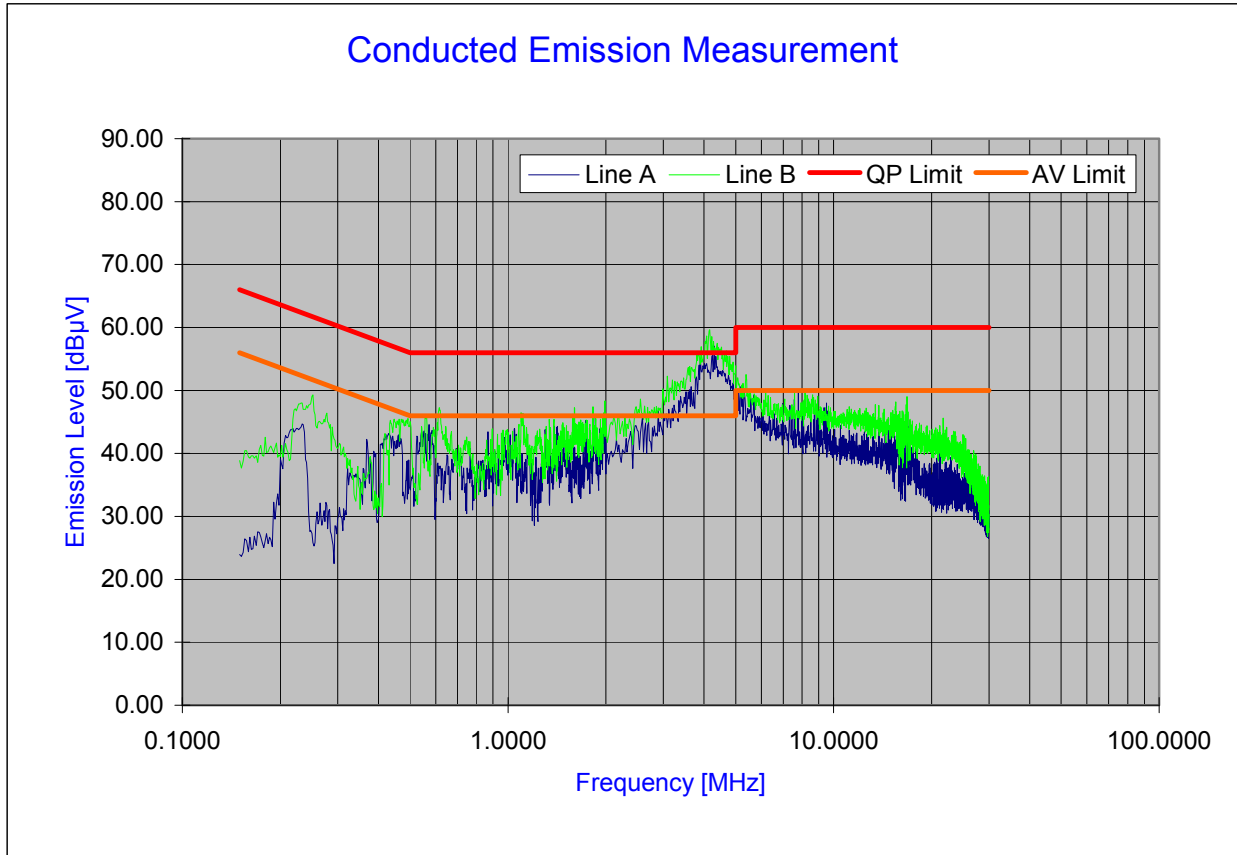



Ver.1.1 ©PCTEST 2006.08

**Plot 8-2. Line-Conducted Test Plot**

**Notes:**

1. All Modes of operation were investigated and the worst-case emissions are reported.
2. The limit for intentional radiator devices from 150k to 30MHz is specified in Section 15.207 of the Title 47 CFR.
3. Line A = Phase; Line B = Neutral
4. Traces shown in plot are made using a peak detector.
5. Deviations to the Specifications: None.

FCC ID: A3LSPHL700	 PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.225 MEASUREMENT REPORT (CERTIFICATION)	 SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1201230117.A3L	Test Date(s): 02/02/12 - 03/06/12	EUT Type: Portable Handset	Page 19 of 23	



**Line Conducted Measurement Data (Cont'd)**  
**§15.207; RSS-Gen (7.2.2)**

No.	Line	Frequency [MHz]	Factor [dB]	QP [dBμV]	Limit [dBμV]	Margin [dB]	Average [dBμV]	Limit [dBμV]	Margin [dB]
1	A	1.846	7.14	29.38	56.00	-26.62	20.75	46.00	-25.25
2	A	2.544	7.22	35.03	56.00	-20.97	23.61	46.00	-22.39
3	A	3.330	7.29	38.42	56.00	-17.58	28.68	46.00	-17.32
4	A	3.483	7.31	39.73	56.00	-16.27	29.29	46.00	-16.71
5	A	3.848	7.34	43.30	56.00	-12.70	32.75	46.00	-13.25
6	A	3.971	7.34	43.81	56.00	-12.19	33.55	46.00	-12.45
7	A	4.288	7.37	45.77	56.00	-10.23	35.68	46.00	-10.32
8	A	4.674	7.39	43.41	56.00	-12.59	32.83	46.00	-13.17
9	A	5.094	7.41	39.49	60.00	-20.51	29.76	50.00	-20.24
10	A	5.234	7.42	38.79	60.00	-21.21	28.64	50.00	-21.36
11	B	0.618	6.99	33.74	56.00	-22.26	21.72	46.00	-24.28
12	B	1.090	7.05	27.79	56.00	-28.21	20.64	46.00	-25.36
13	B	1.128	7.06	33.47	56.00	-22.53	22.78	46.00	-23.22
14	B	1.594	7.11	33.41	56.00	-22.59	25.79	46.00	-20.21
15	B	1.834	7.14	36.06	56.00	-19.94	25.51	46.00	-20.49
16	B	1.949	7.15	34.28	56.00	-21.72	24.22	46.00	-21.78
17	B	1.996	7.15	36.38	56.00	-19.62	25.41	46.00	-20.59
18	B	2.642	7.23	38.89	56.00	-17.11	26.76	46.00	-19.24
19	B	4.143	7.37	49.39	56.00	-6.61	38.46	46.00	-7.54
20	B	5.388	7.45	42.24	60.00	-17.76	32.97	50.00	-17.03

**Table 8-7. Line-Conducted Test Data**

**Notes:**

1. All Modes of operation were investigated and the worst-case emissions are reported.
2. The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
3. Line A = Phase; Line B = Neutral
4. Factor (dB) = Cable loss (dB) + LISN insertion factor (dB)
5. QP/AV Level (dBμV) = QP/AV Analyzer/Receiver Level (dBμV) + Factor (dB)
6. Margin (dB) = QP/AV Level (dBμV) – Limit (dBμV)
7. Traces shown in plot are made using a peak detector.
8. Deviations to the Specifications: None.

FCC ID: A3LSPHL700		FCC Pt. 15.225 MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1201230117.A3L	Test Date(s): 02/02/12 - 03/06/12	EUT Type: Portable Handset	Page 20 of 23	

## 8.6 Frequency Stability Test Data

**§15.225; RSS-210 [A2.6]**

Part 15.225 requires that devices operating in the 13.553 – 13.567 MHz shall maintain the carrier frequency within 0.01% of the operating frequency over the temperature variation of -20 degrees to +50 degrees C at normal supply voltage.



OPERATING FREQUENCY: 13,560,000 Hz

REFERENCE VOLTAGE: 3.7 Vdc


DEVIATION LIMIT: ± 0.01 % = 1356Hz

VOLTAGE (%)	POWER Battery	TEMP (°C)	Frequency (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.70	+ 20 (Ref)	13,559,995	-5	-0.000037
100 %		- 20	13,559,988	-12	-0.000088
100 %		- 10	13,559,996	-4	-0.000029
100 %		0	13,559,991	-9	-0.000066
100 %		+ 10	13,560,004	4	0.000029
100 %		+ 20	13,560,008	8	0.000059
100 %		+ 25	13,560,003	3	0.000022
100 %		+ 30	13,560,015	15	0.000111
100 %		+ 40	13,559,992	-8	-0.000059
100 %		+ 50	13,559,982	-18	-0.000133
Battery End Point		3.40	+ 20	13,559,981	-19
115 %	4.26	+ 20	13,559,982	-18	-0.000133



**Table 8-8. Frequency Stability Test Data**

FCC ID: A3LSPHL700		FCC Pt. 15.225 MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1201230117.A3L	Test Date(s): 02/02/12 - 03/06/12	EUT Type: Portable Handset	Page 21 of 23	

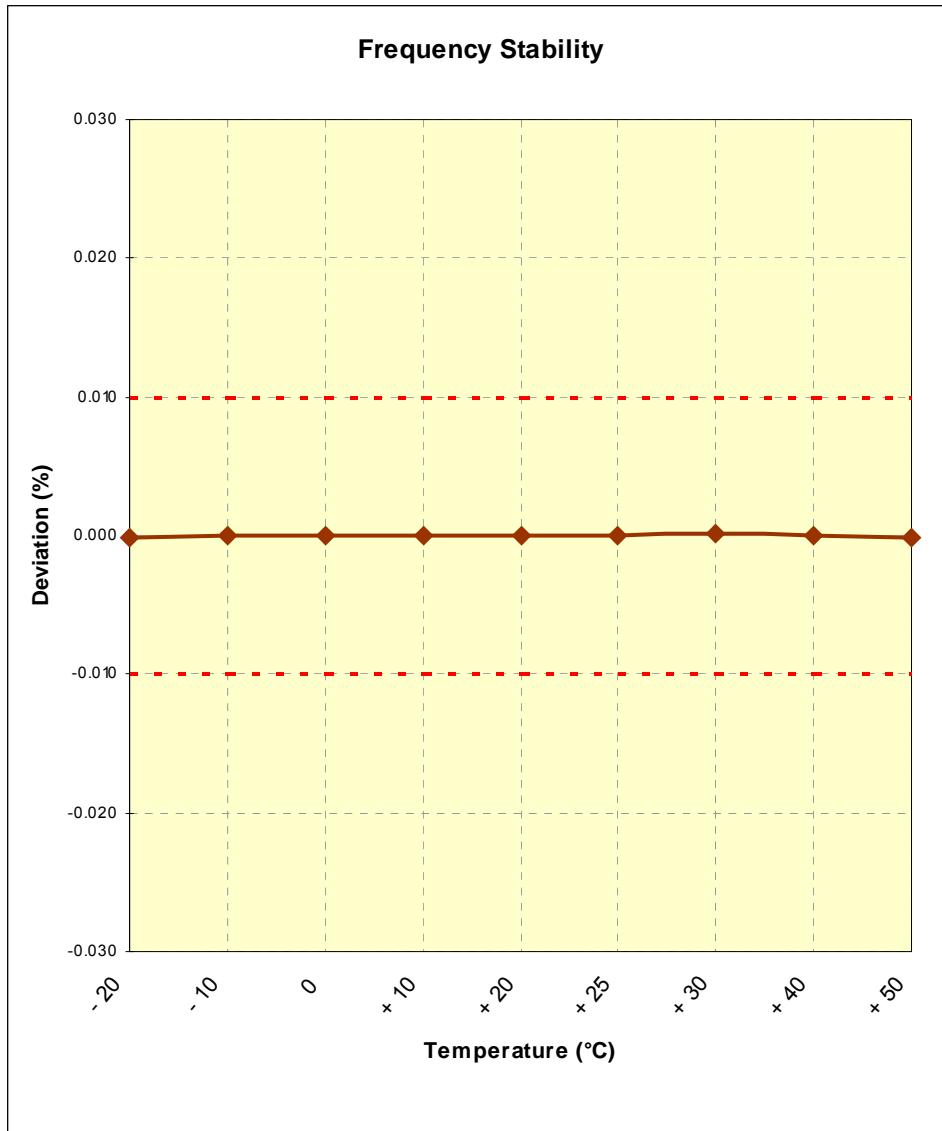**Frequency Stability Test Data (Cont'd)**  
§15.225; RSS-210 [A2.6]





**Figure 8-3. Frequency Stability Plot**

<b>FCC ID:</b> A3LSPHL700		<b>FCC Pt. 15.225 MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1201230117.A3L	<b>Test Date(s):</b> 02/02/12 - 03/06/12	<b>EUT Type:</b> Portable Handset	Page 22 of 23	

## 9.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **Samsung Portable Handset FCC ID: A3LSPHL700** has been tested to show compliance with the requirements specified in §15.225 of the FCC Rules and RSS-210 of the Industry Canada rules.

<b>FCC ID:</b> A3LSPHL700		<b>FCC Pt. 15.225 MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1201230117.A3L	<b>Test Date(s):</b> 02/02/12 - 03/06/12	<b>EUT Type:</b> Portable Handset	Page 23 of 23	