



## MEASUREMENT REPORT FCC Part 24 & 27 LTE

**Applicant Name:**  
 Samsung Electronics, Co. Ltd.  
 129, Samsung-ro, Maetan dong,  
 Yeongtong-gu, Suwon-si  
 Gyeonggi-do 443-742, Korea

**Date of Testing:**  
 7/3 - 7/7/2014  
**Test Site/Location:**  
 PCTEST Lab., Columbia, MD, USA  
**Test Report Serial No.:**  
 0Y1407011336.

<b>FCC ID :</b>	<b>A3LSPHL720T</b>
<b>APPLICANT:</b>	<b>SAMSUNG ELECTRONICS, CO. LTD.</b>

**Application Type:** Class II Permissive Change  
**FCC Classification:** PCS Licensed Transmitter Held to Ear (PCE)  
**FCC Rule Part(s):** §2; §24; §27  
**Test Procedure(s):** ANSI/TIA-603-C-2004, KDB 971168 v02r01, KDB 648474 D03 v01r02  
**EUT Type:** Portable Handset  
**Model(s):** SPH-L720T  
**Test Device Serial No.:** *identical prototype* [S/N: EMC (ALL BAND), Backup Sample]  
**Class II Permissive Change:** Please see FCC change document  
**Original Grant Date:** 10/21/2013



Mode	Tx Frequency (MHz)	Emission Designator	Modulation	EIRP	
				Max. Power (W)	Max. Power (dBm)
LTE Band 25	1850.7 - 1914.3	1M11G7D	QPSK	0.139	21.43
LTE Band 25	1850.7 - 1914.3	1M13W7D	16QAM	0.111	20.46
LTE Band 25	1857.5 - 1907.5	13M5G7D	QPSK	0.148	21.71
LTE Band 25	1857.5 - 1907.5	13M5W7D	16QAM	0.114	20.58
LTE Band 25	1860 - 1905	17M9G7D	QPSK	0.137	21.37
LTE Band 25	1860 - 1905	18M0W7D	16QAM	0.106	20.26
LTE Band 41	2499 - 2687.3	4M50G7D	QPSK	0.099	19.97
LTE Band 41	2499 - 2687.3	4M51W7D	16QAM	0.065	18.10

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



  
 Randy Ortanez  
 President




<b>FCC ID:</b> A3LSPHL720T		<b>FCC Pt. 24 &amp; 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1407011336.	<b>Test Dates:</b> 7/3 - 7/7/2014	<b>EUT Type:</b> Portable Handset		Page 1 of 82

# T A B L E O F C O N T E N T S


FCC PART 24 & 27 MEASUREMENT REPORT .....		3
1.0 INTRODUCTION .....		4
1.1 SCOPE .....		4
1.2 TESTING FACILITY .....		4
2.0 PRODUCT INFORMATION.....		5
2.1 EQUIPMENT DESCRIPTION .....		5
2.2 DEVICE CAPABILITIES.....		5
2.3 EMI SUPPRESSION DEVICE(S)/MODIFICATIONS .....		5
2.4 LABELING REQUIREMENTS.....		5
3.0 DESCRIPTION OF TESTS .....		6
3.1 MEASUREMENT PROCEDURE .....		6
3.2 BRS/EBS FREQUENCY RANGE .....		6
3.3 PCS - BASE FREQUENCY BLOCKS.....		7
3.4 PCS - MOBILE FREQUENCY BLOCKS.....		7
3.5 RADIATED POWER AND RADIATED SPURIOUS EMISSIONS .....		8
4.0 TEST EQUIPMENT CALIBRATION DATA .....		9
5.0 SAMPLE CALCULATIONS .....		10
6.0 TEST RESULTS.....		11
6.1 SUMMARY.....		11
6.2 OCCUPIED BANDWIDTH .....		12
6.3 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL.....		17
6.4 BAND EDGE EMISSIONS AT ANTENNA TERMINAL .....		55
6.5 PEAK-AVERAGE RATIO.....		64
6.6 RADIATED POWER (EIRP).....		68
6.7 RADIATED SPURIOUS EMISSIONS MEASUREMENTS .....		71
6.8 FREQUENCY STABILITY / TEMPERATURE VARIATION .....		77
7.0 CONCLUSION.....		82

<b>FCC ID:</b> A3LSPHL720T		<b>FCC Pt. 24 &amp; 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1407011336.	<b>Test Dates:</b> 7/3 - 7/7/2014	<b>EUT Type:</b> Portable Handset	Page 2 of 82	



# MEASUREMENT REPORT

## FCC Part 24 & 27





### §2.1033 General Information



**APPLICANT:** Samsung Electronics, Co. Ltd.  
**APPLICANT ADDRESS:** 129, Samsung-ro, Maetan dong,  
 Yeongtong-gu, Suwon-si, Gyeonggi-do 443-742, Korea  
**TEST SITE:** PCTEST ENGINEERING LABORATORY, INC.  
**TEST SITE ADDRESS:** 7185 Oakland Mills Road, Columbia, MD 21045 USA  
**FCC RULE PART(S):** §2; §24; §27  
**BASE MODEL:** SPH-L720T  
**FCC ID:** A3LSPHL720T  
**FCC CLASSIFICATION:** PCS Licensed Transmitter Held to Ear (PCE)  
**Test Device Serial No.:** EMC (ALL BAND), Backup  Production  Pre-Production  Engineering  
 Sample  
**DATE(S) OF TEST:** 7/3 - 7/7/2014  
**TEST REPORT S/N:** 0Y1407011336.

### Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab located in Columbia, MD 21046, U.S.A.



- PCTEST facility is an FCC registered (PCTEST Reg. No. 159966) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules and Industry Canada (2451B-1).
- PCTEST Lab is accredited to ISO 17025 by U.S. National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP Lab code: 100431-0) in EMC, FCC and Telecommunications.
- PCTEST Lab is accredited to ISO 17025-2005 by the American Association for Laboratory Accreditation (A2LA) in Specific Absorption Rate (SAR) testing, Hearing Aid Compatibility (HAC) testing, CTIA Test Plans, and wireless testing for FCC and Industry Canada Rules.
- PCTEST Lab is a recognized U.S. Conformity Assessment Body (CAB) in EMC and R&TTE (n.b. 0982) under the U.S.-EU Mutual Recognition Agreement (MRA).
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC Guide 65 by the American National Standards Institute (ANSI) in all scopes of FCC Rules and Industry Canada Standards (RSS).
- PCTEST facility is an IC registered (2451B-1) test laboratory with the site description on file at Industry Canada.
- PCTEST is a CTIA Authorized Test Laboratory (CATL) for AMPS, CDMA, and EvDO wireless devices and for Over-the-Air (OTA) Antenna Performance testing for AMPS, CDMA, GSM, GPRS, EGPRS, UMTS (W-CDMA), CDMA 1xEVDO, and CDMA 1xRTT.

<b>FCC ID:</b> A3LSPHL720T		<b>FCC Pt. 24 &amp; 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1407011336.	<b>Test Dates:</b> 7/3 - 7/7/2014	<b>EUT Type:</b> Portable Handset	Page 3 of 82	

# 1.0 INTRODUCTION

## 1.1 Scope

Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

## 1.2 Testing Facility

The map below shows the location of the PCTEST LABORATORY, its proximity to the FCC Laboratory, the Columbia vicinity, the Baltimore-Washington Intern't'l (BWI) airport, the city of Baltimore and the Washington, DC area. (See Figure 1-1).

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The site coordinates are 39° 10'23" N latitude and 76° 49'50" W longitude. The facility is 0.4 miles North of the FCC laboratory, and the ambient signal and ambient signal strength are approximately equal to those of the FCC laboratory. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2003 on February 15, 2012.

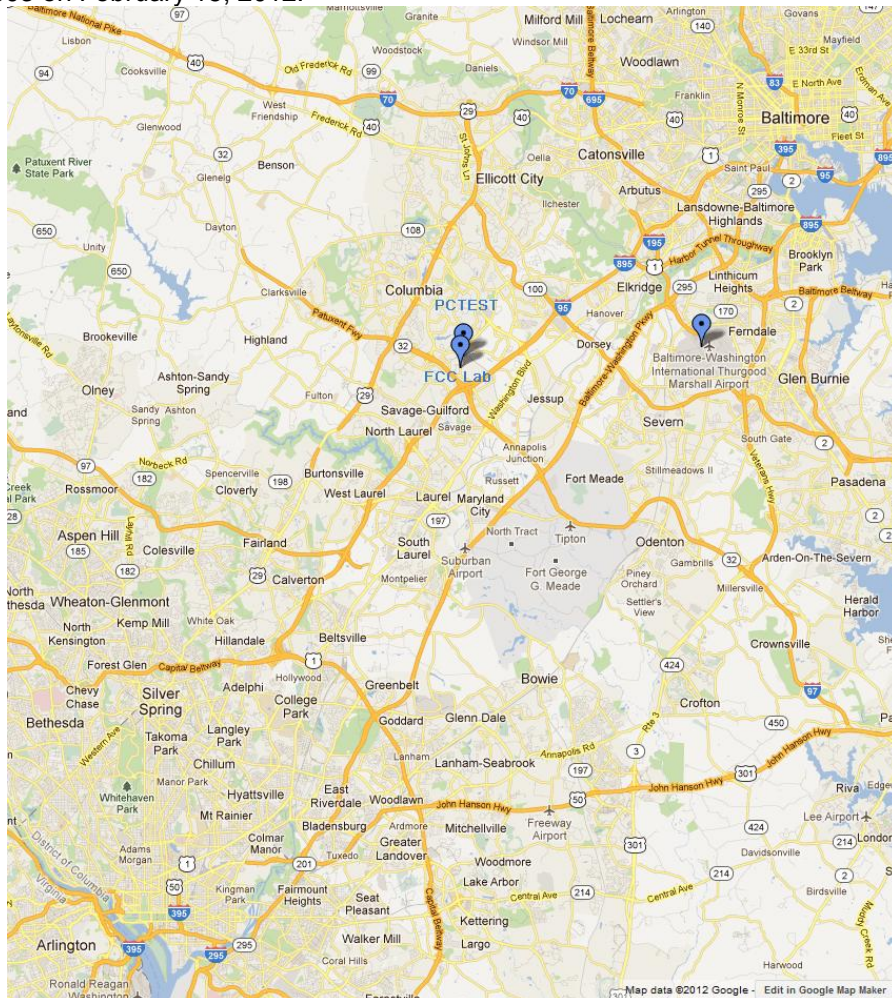


Figure 1-1. Map of the Greater Baltimore and Metropolitan Washington, D.C. area

FCC ID: A3LSPHL720T		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407011336.	Test Dates: 7/3 - 7/7/2014	EUT Type: Portable Handset		Page 4 of 82

## 2.0 PRODUCT INFORMATION

### 2.1 Equipment Description

The Equipment Under Test (EUT) is the **Samsung Portable Handset FCC ID: A3LSPHL720T**. The test data contained in this report pertains only to the emissions due to the EUT's LTE function.

### 2.2 Device Capabilities

This device contains the following capabilities:

850/1900 CDMA/EvDO Rev 0/A, 1x Advanced (BC0, BC1, BC10), 850/1900 GSM/GPRS/EDGE, 850/1900 WCDMA/HSPA, Multi-band LTE, 802.11a/b/g/n/ac WLAN (DTS/NII), Bluetooth (1x,EDR, LE), NFC, ANT+

Additional spurious emission testing was performed per KDB 648474 D03 v01r02 and the additional worst case emissions are herein and identified as WCC. The handset was placed on the verified charging pad under normal conditions and in a simulated call configuration. Only worst case emissions are shown in this report.



### 2.3 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

### 2.4 Labeling Requirements

Per 2.925

The FCC identifier shall be permanently affixed to the equipment and shall be readily visible to the purchaser at the time of purchase.

FCC ID: A3LSPHL720T		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1407011336.	<b>Test Dates:</b> 7/3 - 7/7/2014	<b>EUT Type:</b> Portable Handset		Page 5 of 82

## 3.0 DESCRIPTION OF TESTS

### 3.1 Measurement Procedure



The measurement procedures described in the document titled “Land Mobile FM or PM – Communications Equipment – Measurements and Performance Standards” (ANSI/TIA-603-C-2004) and “Procedures for Compliance Measurement of the Fundamental Emission Power of Licensed Wideband (> 1 MHz) Digital Transmission Systems” (KDB 971168) were used in the measurement of the **Samsung Portable Handset FCC ID: A3LSPHL720T**.

### 3.2 BRS/EBS Frequency Range

#### §27.5(i)(2)


2496-2690 MHz bands. The following frequencies are available for licensing pursuant to this part in the 2496-2690 MHz band:

Lower Band Segment	Middle Band Segment	Upper Band Segment
BRS Channel 1: 2496-2502 MHz or 2150-2156 MHz	EBS Channel A4: 2572-2578 MHz	BRS Channel KH1: 2614.00000-2614.33333 MHz.
EBS Channel A1: 2502-2507.5 MHz	EBS Channel B4: 2578-2584 MHz	BRS Channel KH2: 2614.33333-2614.66666 MHz.
EBS Channel A2: 2507.5-2513 MHz	EBS Channel C4: 2584-2590 MHz	BRS Channel KH3: 2614.66666-2615.00000 MHz.
EBS Channel A3: 2513-2518.5 MHz	EBS Channel D4: 2590-2596 MHz	EBS Channel KG1: 2615.00000-2615.33333 MHz.
EBS Channel B1: 2518.5-2524 MHz	EBS Channel G4: 2596-2602 MHz	EBS Channel KG2: 2615.33333-2615.66666 MHz.
EBS Channel B2: 2524-2529.5 MHz	BRS/EBS Channel F4: 2602-2608 MHz	EBS Channel KG3: 2615.66666-2616.00000 MHz.
EBS Channel B3: 2529.5-2535 MHz	BRS/EBS Channel E4: 2608-2614 MHz	BRS Channel KF1: 2616.00000-2616.33333 MHz.
EBS Channel C1: 2535-2540.5 MHz		BRS Channel KF2: 2616.33333-2616.66666 MHz.
EBS Channel C2: 2540.5-2546 MHz		BRS Channel KF3: 2616.66666-2617.00000 MHz.
EBS Channel C3: 2546-2551.5 MHz		BRS Channel KE1: 2617.00000-2617.33333 MHz.
EBS Channel D1: 2551.5-2557 MHz		BRS Channel KE2: 2617.33333-2617.66666 MHz.
EBS Channel D2: 2557-2562.5 MHz		BRS Channel KE3: 2617.66666-2618.00000 MHz.
EBS Channel D3: 2562.5-2568 MHz		BRS Channel 2: 2618-2624 MHz or 2156-2162 MHz.
EBS Channel JA1: 2568.00000-2568.33333 MHz		BRS Channel 2A: 2618-2624 MHz or 2156-2160 MHz.
EBS Channel JA2: 2568.33333-2568.66666 MHz		BRS/EBS Channel E1: 2624-2629.5 MHz.
EBS Channel JA3: 2568.66666-2569.00000 MHz		BRS/EBS Channel E2: 2629.5-2635 MHz.
EBS Channel JB1: 2569.00000-2569.33333 MHz		BRS/EBS Channel E3: 2635-2640.5 MHz.
EBS Channel JB2: 2569.33333-2569.66666 MHz		BRS/EBS Channel F1: 2640.5-2646 MHz.
EBS Channel JB3: 2569.66666-2570.00000 MHz		BRS/EBS Channel F2: 2646-2651.5 MHz.
EBS Channel JC1: 2570.00000-2570.33333 MHz		BRS/EBS Channel F3: 2651.5-2657 MHz.
EBS Channel JC2: 2570.33333-2570.66666 MHz		BRS Channel H1: 2657-2662.5 MHz.
EBS Channel JC3: 2570.66666-2571.00000 MHz		BRS Channel H2: 2662.5-2668 MHz.
EBS Channel JD1: 2571.00000-2571.33333 MHz		BRS Channel H3: 2668-2673.5 MHz.
EBS Channel JD2: 2571.33333-2571.66666 MHz		EBS Channel G1: 2673.5-2679 MHz.
EBS Channel JD3: 2571.66666-2572.00000 MHz		EBS Channel G2: 2679-2684.5 MHz.
		EBS Channel G3: 2684.5-2690 MHz.

FCC ID: A3LSPHL720T		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407011336.	Test Dates: 7/3 - 7/7/2014	EUT Type: Portable Handset		Page 6 of 82


## BRS-EBS BAND PLANS: POST-TRANSITION AT 2495–2690 MHz

### POST-TRANSITION

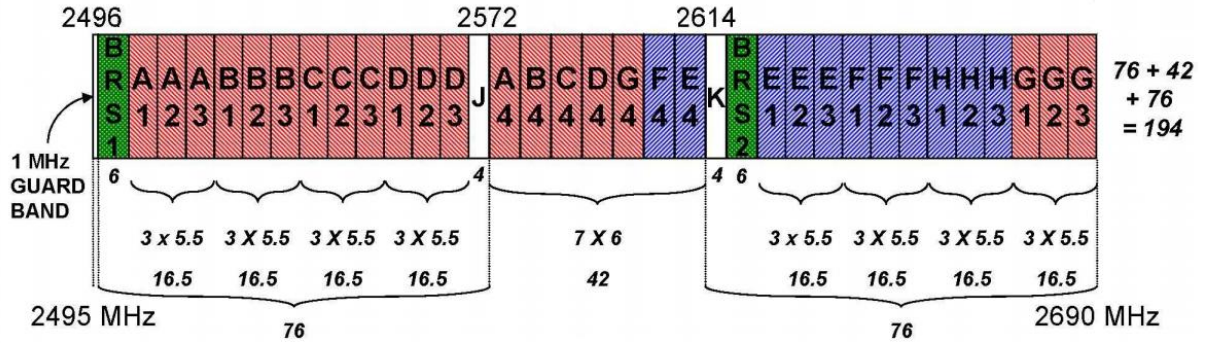

### 3.3 PCS - Base Frequency Blocks

§24.229

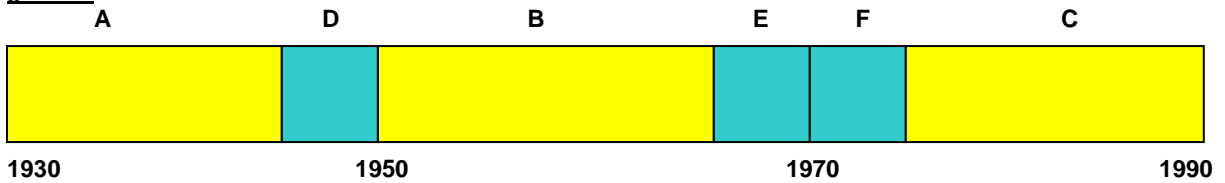


BLOCK 1: 1930 – 1945 MHz (A)  
 BLOCK 2: 1945 – 1950 MHz (D)  
 BLOCK 3: 1950 – 1965 MHz (B)

BLOCK 4: 1965 – 1970 MHz (E)  
 BLOCK 5: 1970 – 1975 MHz (F)  
 BLOCK 6: 1975 – 1990 MHz (C)

### 3.4 PCS - Mobile Frequency Blocks

§24.229

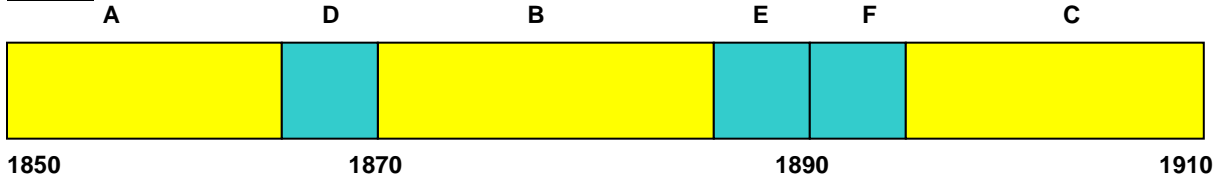

BLOCK 1: 1850 – 1865 MHz (A)  
 BLOCK 2: 1865 – 1870 MHz (D)  
 BLOCK 3: 1870 – 1885 MHz (B)

BLOCK 4: 1885 – 1890 MHz (E)  
 BLOCK 5: 1890 – 1895 MHz (F)  
 BLOCK 6: 1895 – 1910 MHz (C)

FCC ID: A3LSPHL720T		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407011336.	Test Dates: 7/3 - 7/7/2014	EUT Type: Portable Handset		Page 7 of 82

### 3.5 Radiated Power and Radiated Spurious Emissions

§2.1053 §24.232(c) §24.238(a) 27.50(h)(2) 27.53(m)

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Clause 5, Figure 5.7 of ANSI C63.4-2009. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. An ETS Lindgren Model 2188 raised turntable is used for radiated measurement. It is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. A 78cm high PVC support structure is placed on top of the turntable. A ¾” (~1.9cm) sheet of high density polyethylene is used as the table top and is placed on top of the PVC supports to bring the total height of the table to 80cm.



The equipment under test was transmitting while connected to its integral antenna and is placed on a wooden turntable 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer. Radiated power levels are also investigated with the receive antenna horizontally and vertically polarized. The maximized power level is recorded using the spectrum analyzer “Channel Power” function with the integration band set to the emissions’ occupied bandwidth, a RMS detector, RBW = 100kHz, VBW = 300kHz, and a 1 second sweep time over a minimum of 10 sweeps, per the guidelines of KDB 971168.

Per the guidance of ANSI/TIA-603-C-2004, a half-wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level previously recorded from the spurious emission from the EUT. The power of the emission is calculated using the following formula:

$$P_d \text{ [dBm]} = P_g \text{ [dBm]} - \text{cable loss} \text{ [dB]} + \text{antenna gain} \text{ [dBd/dBi]}$$

Where,  $P_d$  is the dipole equivalent power,  $P_g$  is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to  $P_g \text{ [dBm]} - \text{cable loss} \text{ [dB]}$ .

The calculated  $P_d$  levels are then compared to the absolute spurious emission limit of -13dBm which is equivalent to the required minimum attenuation of  $43 + 10\log_{10}(\text{Power} \text{ [Watts]})$ . For Band 41, the calculated  $P_d$  levels are compared to the absolute spurious emission limit of -25dBm which is equivalent to the required minimum attenuation of  $55 + 10\log_{10}(\text{Power} \text{ [Watts]})$ .

FCC ID: A3LSPHL720T		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407011336.	Test Dates: 7/3 - 7/7/2014	EUT Type: Portable Handset	Page 8 of 82	

## 4.0 TEST EQUIPMENT CALIBRATION DATA



Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST).

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	LTX1	Licensed Transmitter Cable Set	1/29/2014	Annual	1/29/2015	N/A
-	RE1	Radiated Emissions Cable Set (UHF/EHF)	5/29/2014	Annual	5/29/2015	N/A
Agilent	8447D	Broadband Amplifier	5/30/2014	Annual	5/30/2015	2443A01900
Agilent	E4448A	PSA (3Hz-50GHz) Spectrum Analyzer	4/16/2014	Annual	4/16/2015	US42510244
Agilent	N9020A	MXA Signal Analyzer	10/29/2013	Annual	10/29/2014	US46470561
Anritsu	MT8820C	Radio Communication Analyzer	N/A			6200901190
Com-Power	AL-130	9kHz - 30MHz Loop Antenna	6/26/2013	Biennial	6/26/2015	121034
Emco	3115	Horn Antenna (1-18GHz)	1/30/2014	Biennial	1/30/2016	9704-5182
Espec	ESX-2CA	Environmental Chamber	4/16/2014	Annual	4/16/2015	17620
ETS Lindgren	3160-09	18-26.5 GHz Standard Gain Horn	6/17/2014	Biennial	6/17/2016	135427
ETS Lindgren	3164-08	Quad Ridge Horn Antenna	3/12/2014	Biennial	3/12/2016	128337
K & L	11SH10-3075/U18000	High Pass Filter	5/2/2014	Annual	5/2/2015	2
Mini-Circuits	SSG-4000HP	USB Synthesized Signal Generator	N/A			11208010032
Mini-Circuits	PWR-SENS-4RMS	USB Power Sensor	4/17/2014	Annual	4/17/2015	11210140001
Mini-Circuits	TVA-11-422	RF Power Amp	N/A			QA1303002
Rohde & Schwarz	TS-PR18	1-18 GHz Pre-Amplifier	3/5/2014	Annual	3/5/2015	100071
Rohde & Schwarz	TS-PR26	18-26.5 GHz Pre-Amplifier	3/12/2014	Annual	3/12/2015	100040
Rohde & Schwarz	ESU26	EMI Test Receiver (26.5GHz)	1/27/2014	Annual	1/27/2015	100342
Rohde & Schwarz	CMW500	Radio Communication Tester	4/15/2014	Annual	4/15/2015	102060
Seekonk	NC-100	Torque Wrench 5/16", 8" lbs	3/18/2014	Biennial	3/18/2016	N/A
Sunol	JB5	Bi-Log Antenna (30M - 5GHz)	1/28/2014	Biennial	1/28/2016	A051107
VWR	62344-734	Thermometer with Clock	2/20/2014	Biennial	2/20/2016	140140336

**Table 4-1. Test Equipment**

**Notes:**

Equipment with a calibration date of "N/A" shown in this list was not used to make direct calibrated measurements.

FCC ID: A3LSPHL720T		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407011336.	Test Dates: 7/3 - 7/7/2014	EUT Type: Portable Handset	Page 9 of 82	

## 5.0 SAMPLE CALCULATIONS

### Emission Designator

#### QPSK Modulation

**Emission Designator = 8M62G7D**

LTE BW = 8.62 MHz  
 G = Phase Modulation  
 7 = Quantized/Digital Info  
 D = Amplitude/Angle Modulated

#### 16QAM Modulation


**Emission Designator = 8M45W7D**

LTE BW = 8.45 MHz  
 W = Amplitude/Angle Modulated  
 7 = Quantized/Digital Info  
 D = Combination (Audio/Data)

### Spurious Radiated Emission – LTE Band

#### **Example: Middle Channel LTE Mode 2<sup>nd</sup> Harmonic (1564 MHz)**

The average spectrum analyzer reading at 3 meters with the EUT on the turntable was  $-81.0$  dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of  $-81.0$  dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 1564 MHz. So 6.1 dB is added to the signal generator reading of  $-30.9$  dBm yielding  $-24.80$  dBm. The fundamental EIRP was 25.501 dBm so this harmonic was 25.501 dBm – ( $-24.80$ ).

FCC ID: A3LSPHL720T		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407011336.	Test Dates: 7/3 - 7/7/2014	EUT Type: Portable Handset		Page 10 of 82

## 6.0 TEST RESULTS

### 6.1 Summary



Company Name: Samsung Electronics, Co. Ltd.  
 FCC ID: A3LSPHL720T  
 FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)  
 Mode(s): LTE

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Result	Reference
<b>TRANSMITTER MODE (TX)</b>					
2.1049	Occupied Bandwidth	N/A	CONDUCTED	PASS	Section 6.2
2.1051 24.238(a)	Band Edge / Conducted Spurious Emissions	> 43 + 10log <sub>10</sub> (P[Watts]) at Band Edge and for all out-of-band emissions		PASS	Section 6.3, Section 6.4
27.53(m)	Band Edge / Conducted Spurious Emissions	> 43 + 10log <sub>10</sub> (P[Watts]) at channel edges and > 55 + 10log <sub>10</sub> (P[Watts]) at 5.5MHz away and beyond channel edges		PASS	Section 6.3, Section 6.4
24.232(d)	Peak-Average Ratio	< 13 dB		PASS	Section 6.5
2.1046	Transmitter Conducted Output Power	N/A		PASS	See RF Exposure Report
2.1055. 24.235 27.54	Frequency Stability	Fundamental emissions stay within authorized frequency block (Part 24, 27)		PASS	Section 6.8
24.232(c) 27.50(h.2)	Equivalent Isotropic Radiated Power (Band 25 41)	< 2 Watts max. EIRP	RADIATED	PASS	Section 6.6
2.1053 24.238(a)	Undesirable Emissions	> 43 + 10log <sub>10</sub> (P[Watts]) for all out-of-band emissions		PASS	Section 6.7
27.53(m)	Undesirable Emissions	> 43 + 10log <sub>10</sub> (P[Watts]) at channel edges and > 55 + 10log <sub>10</sub> (P[Watts]) at 5.5MHz away and beyond channel edges		PASS	Section 6.7

**Table 6-1. Summary of Test Results**

**Notes:**

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots (Sections 6.2, 6.3, 6.4, 6.5) were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST "LTE Automation", Version 2.4.

FCC ID: A3LSPHL720T		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407011336.	Test Dates: 7/3 - 7/7/2014	EUT Type: Portable Handset	Page 11 of 82	

## 6.2 Occupied Bandwidth

§2.1049

### Test Overview

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst case configuration results are reported in this section.

### Test Procedure Used


KDB 971168 v02r01 – Section 4.2

### Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW  $\geq 3 \times$  RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

### Test Setup

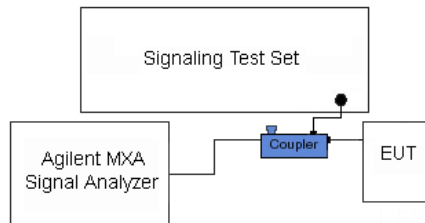

The EUT and measurement equipment were set up as shown in the diagram below.




**Figure 6-1. Test Instrument & Measurement Setup**


### Test Notes

None.

FCC ID: A3LSPHL720T		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407011336.	Test Dates: 7/3 - 7/7/2014	EUT Type: Portable Handset		Page 12 of 82

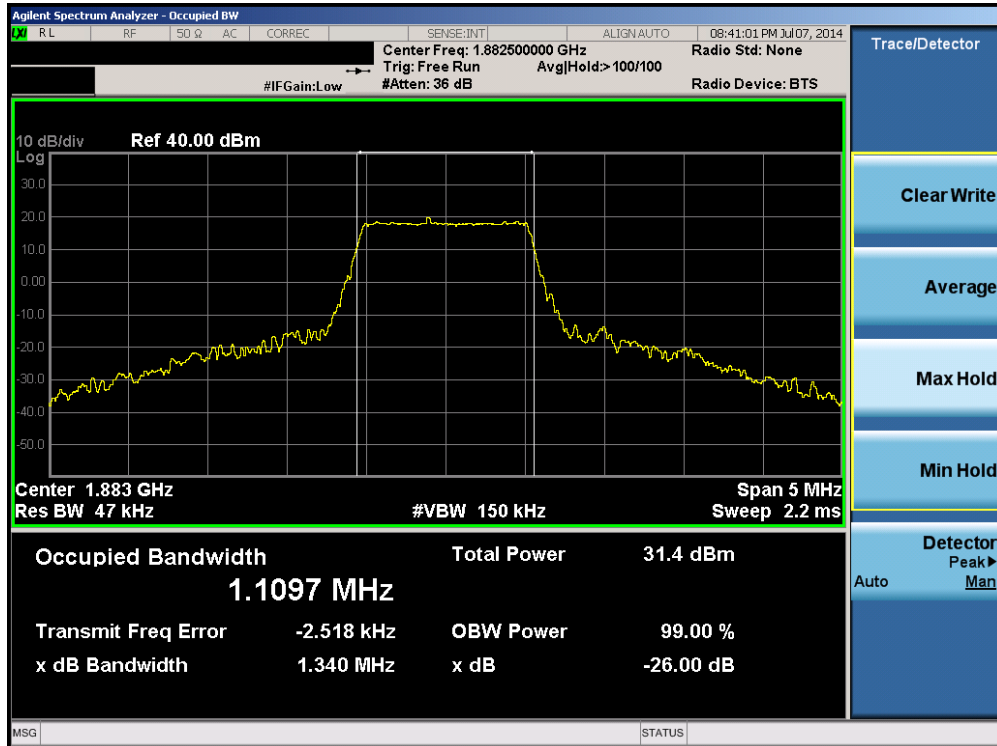


Plot 6-1. Occupied Bandwidth Plot (Band 25 – 1.4MHz QPSK – RB Size 6)

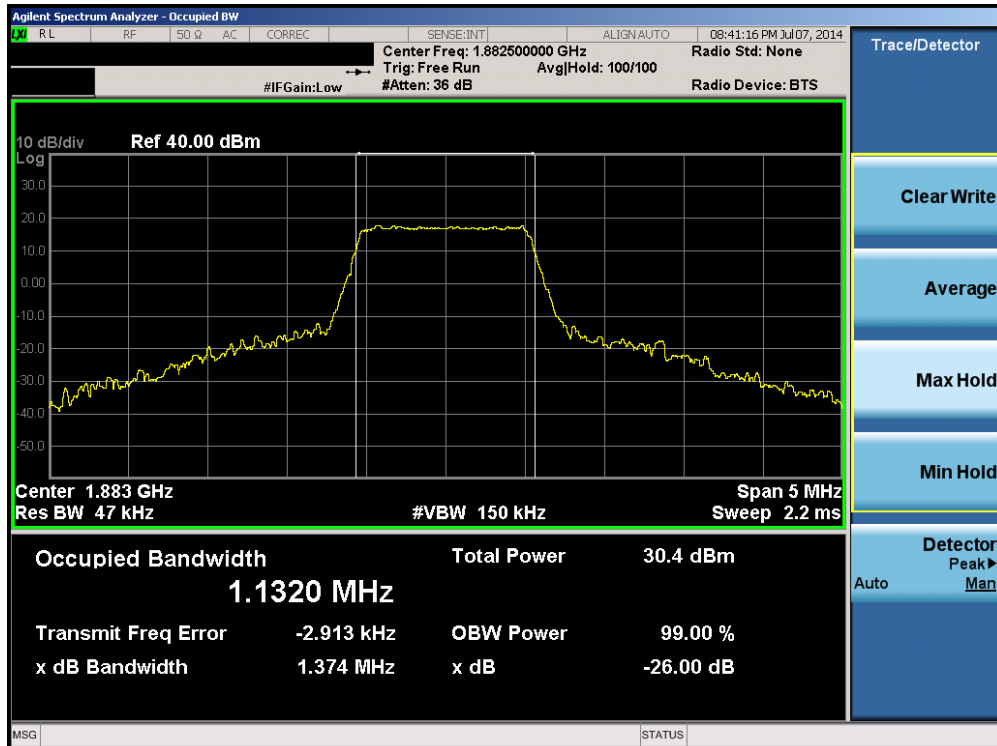


Plot 6-2. Occupied Bandwidth Plot (Band 25 – 1.4MHz 16-QAM – RB Size 6)

FCC ID: A3LSPHL720T		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407011336.	Test Dates: 7/3 - 7/7/2014	EUT Type: Portable Handset		Page 13 of 82

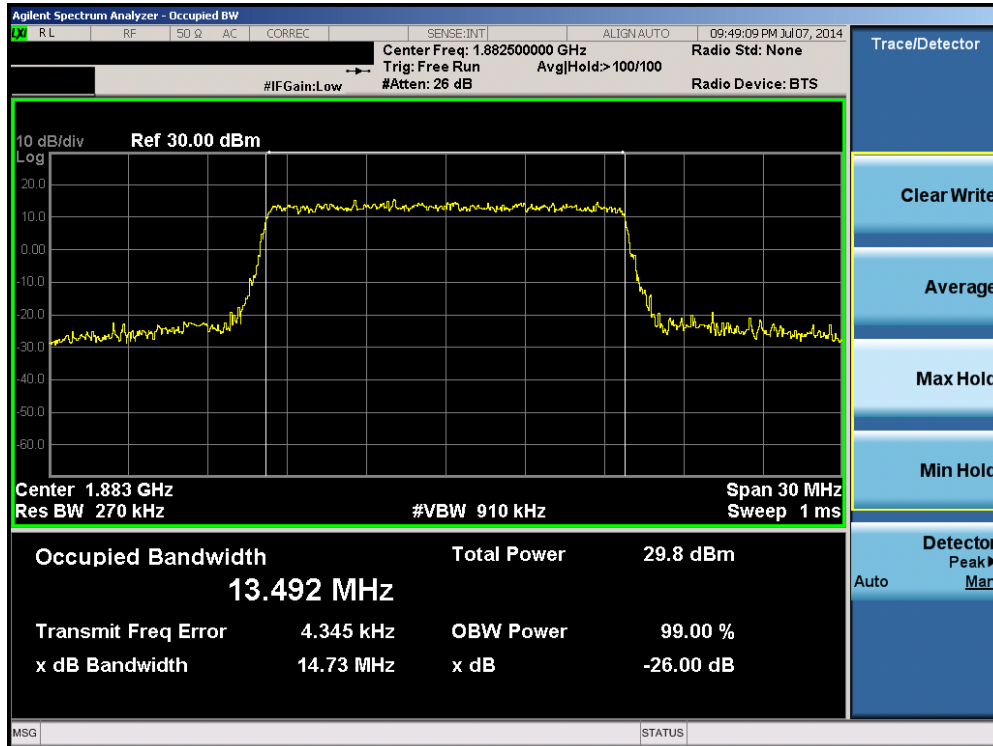


Plot 6-3. Occupied Bandwidth Plot (Band 25 – 15.0MHz QPSK – RB Size 75)

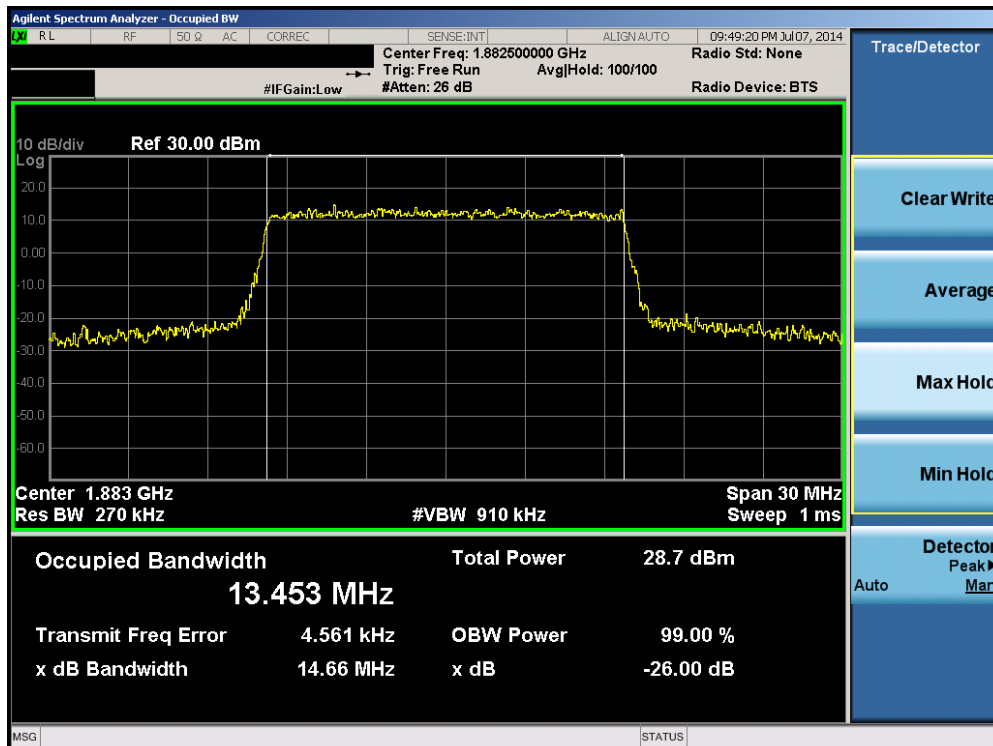


Plot 6-4. Occupied Bandwidth Plot (Band 25 – 15.0MHz 16-QAM – RB Size 75)

FCC ID: A3LSPHL720T		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407011336.	Test Dates: 7/3 - 7/7/2014	EUT Type: Portable Handset		Page 14 of 82

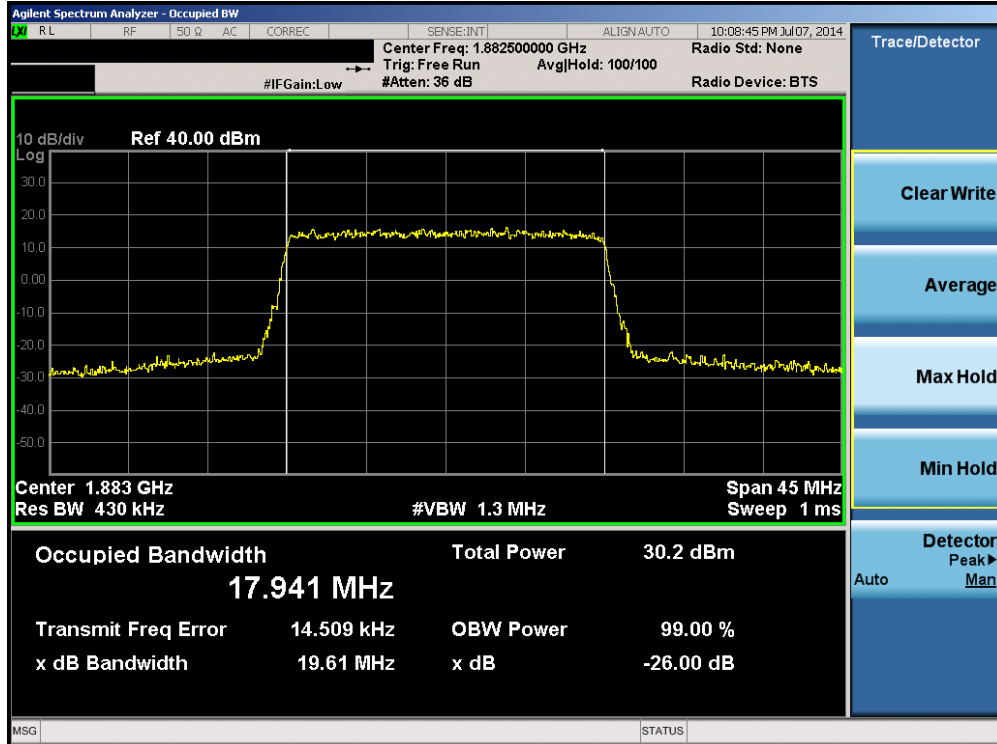


Plot 6-5. Occupied Bandwidth Plot (Band 25 – 20.0MHz QPSK – RB Size 100)

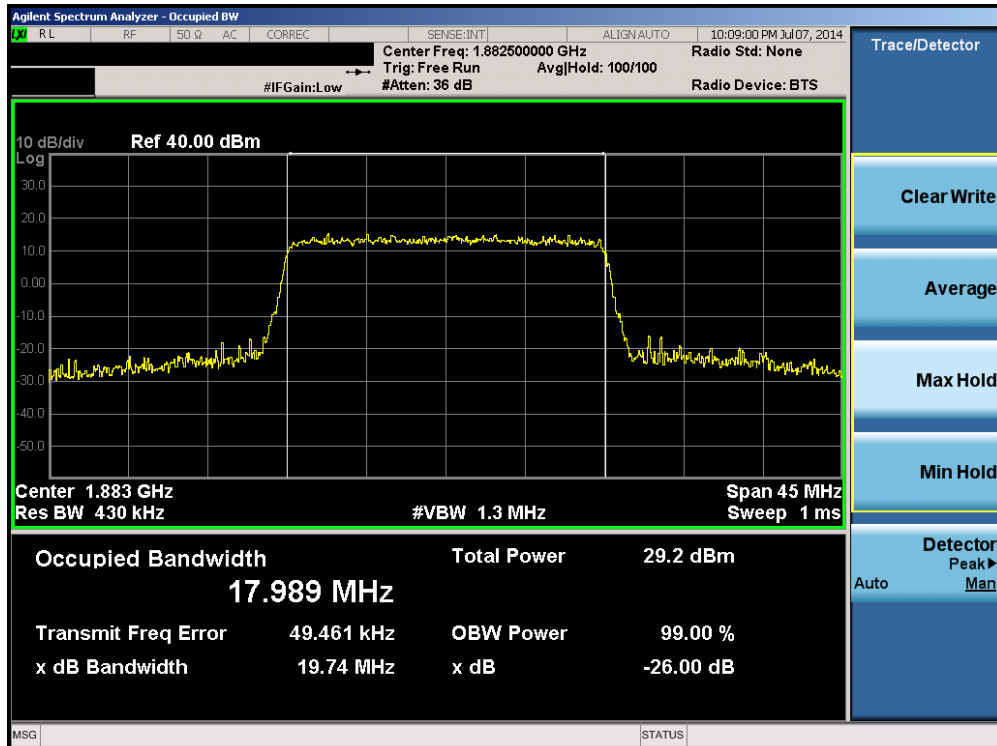


Plot 6-6. Occupied Bandwidth Plot (Band 25 – 20.0MHz 16-QAM – RB Size 100)

FCC ID: A3LSPHL720T		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407011336.	Test Dates: 7/3 - 7/7/2014	EUT Type: Portable Handset		Page 15 of 82

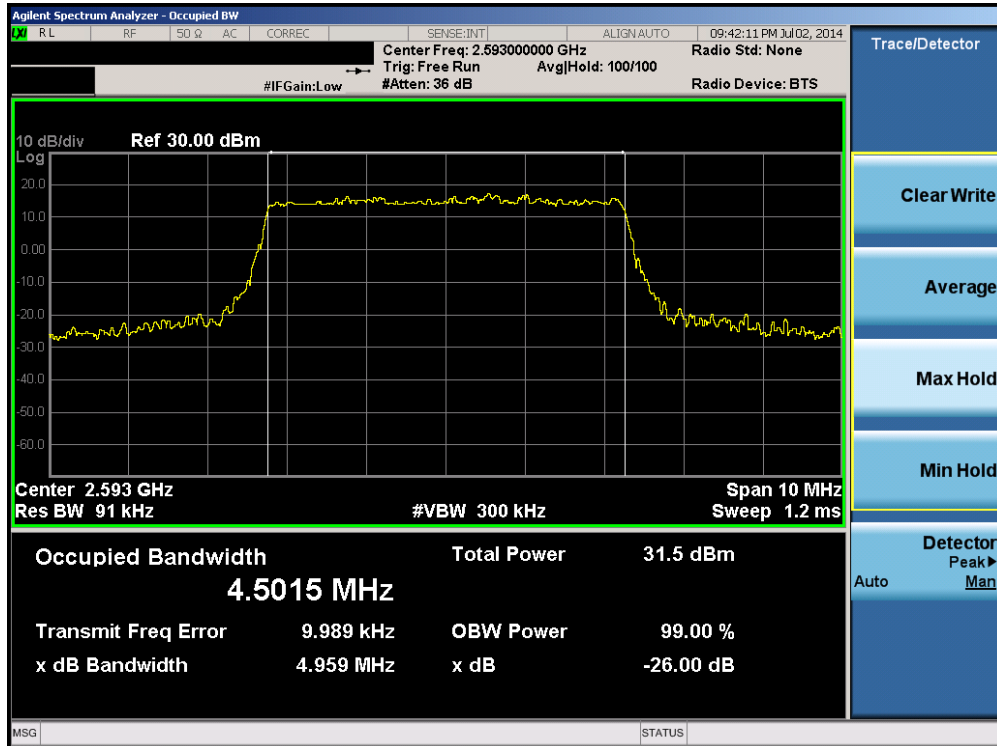

Plot 6-7. Occupied Bandwidth Plot (Band 41 – 5.0MHz QPSK – RB Size 25)

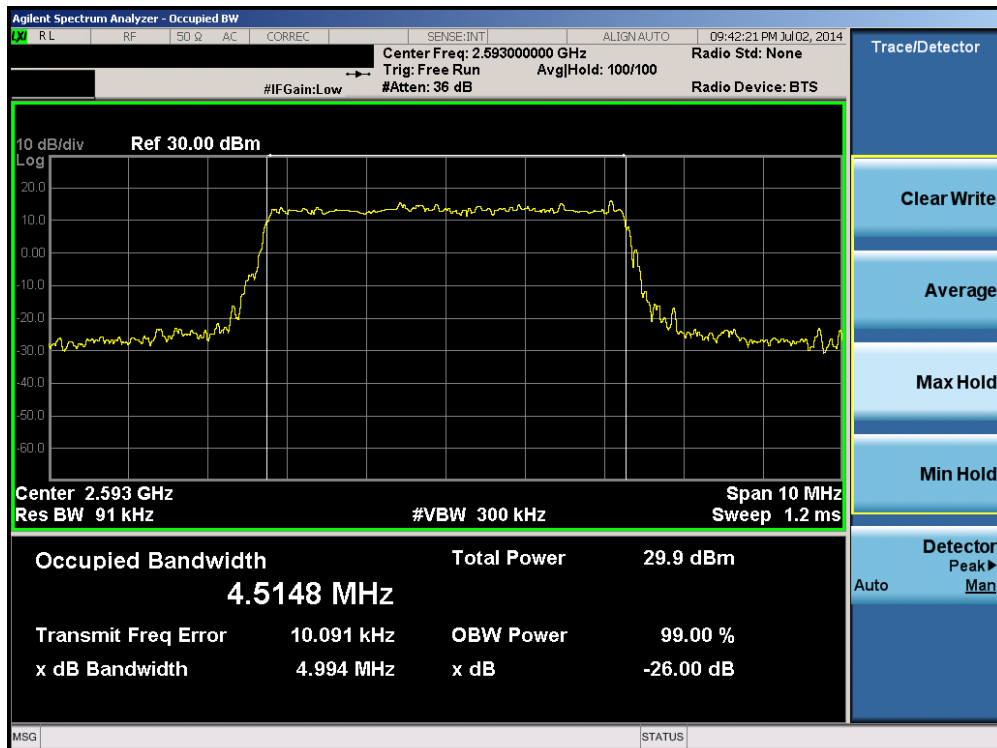

Plot 6-8. Occupied Bandwidth Plot (Band 41 – 5.0MHz 16-QAM – RB Size 25)

FCC ID: A3LSPHL720T		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407011336.	Test Dates: 7/3 - 7/7/2014	EUT Type: Portable Handset		Page 16 of 82

### 6.3 Spurious and Harmonic Emissions at Antenna Terminal

§2.1051 §24.238(a) §27.53(l)

#### Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10<sup>th</sup> harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

***The minimum permissible attenuation level of any spurious emission is  $43 + \log_{10}(P_{[Watts]})$ , where  $P$  is the transmitter power in Watts. For Band 41, the minimum permissible attenuation level of any spurious emission is  $55 + \log_{10}(P_{[Watts]})$ .***

#### Test Procedure Used


KDB 971168 v02r01 – Section 6.0

#### Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to at least 10 \* the fundamental frequency (separated into at least two plots per channel)
2. Detector = RMS
3. Trace mode = max hold
4. Sweep time = auto couple
5. The trace was allowed to stabilize
6. Please see test notes below for RBW and VBW settings

#### Test Setup

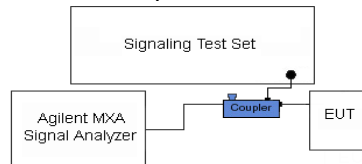

The EUT and measurement equipment were set up as shown in the diagram below.




**Figure 6-2. Test Instrument & Measurement Setup**



#### Test Notes


Compliance with the applicable limits is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater for frequencies less than 1 GHz and 1 MHz or greater for frequencies greater than 1 GHz. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power. Many of the following conducted spurious emission plots for Band 41 do not extend to completely cover the necessary frequencies. In order to demonstrate compliance, integration plots with a 1MHz bandwidth covering the remaining frequencies have been provided. E.g. Plot 6-27 only extends up to 2.484GHz when it should extend up to 2489.5GHz, so 1MHz integration measurements are provided to bridge this 5.5MHz gap.

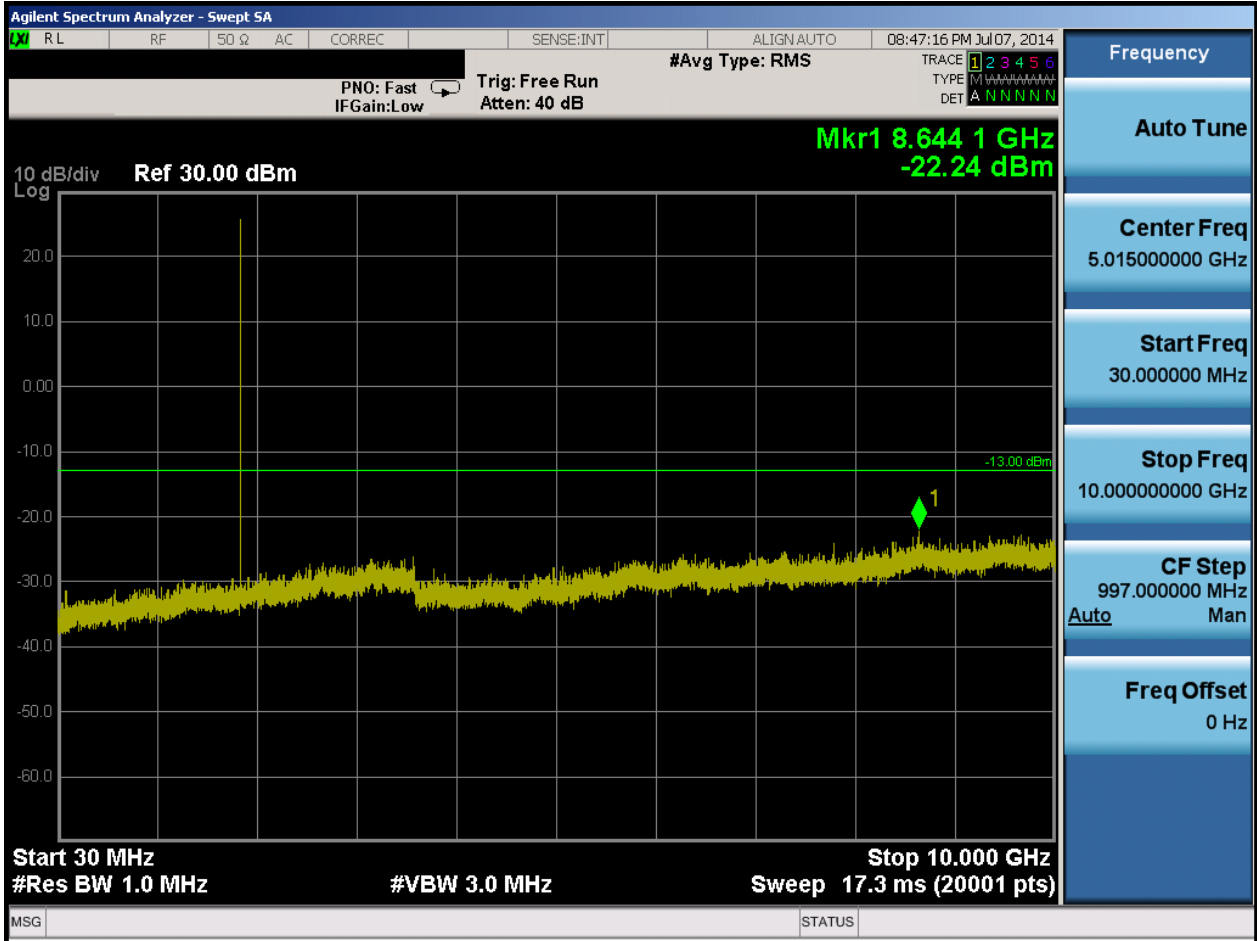FCC ID: A3LSPHL720T		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407011336.	Test Dates: 7/3 - 7/7/2014	EUT Type: Portable Handset		Page 17 of 82




Plot 6-9. Conducted Spurious Plot (Band 25 – 1.4MHz QPSK – RB Size 1, RB Offset 0 – Low Channel)

FCC ID: A3LSPHL720T		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407011336.	Test Dates: 7/3 - 7/7/2014	EUT Type: Portable Handset		Page 18 of 82

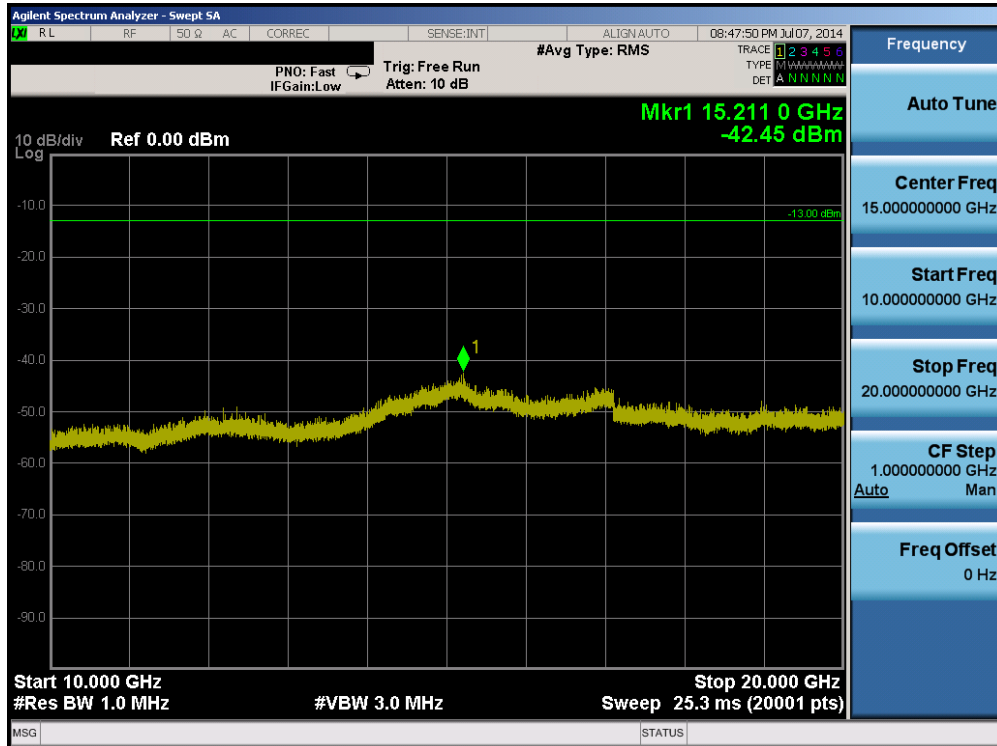


Plot 6-10. Conducted Spurious Plot (Band 25 – 1.4MHz QPSK – RB Size 1, RB Offset 0 – Low Channel)

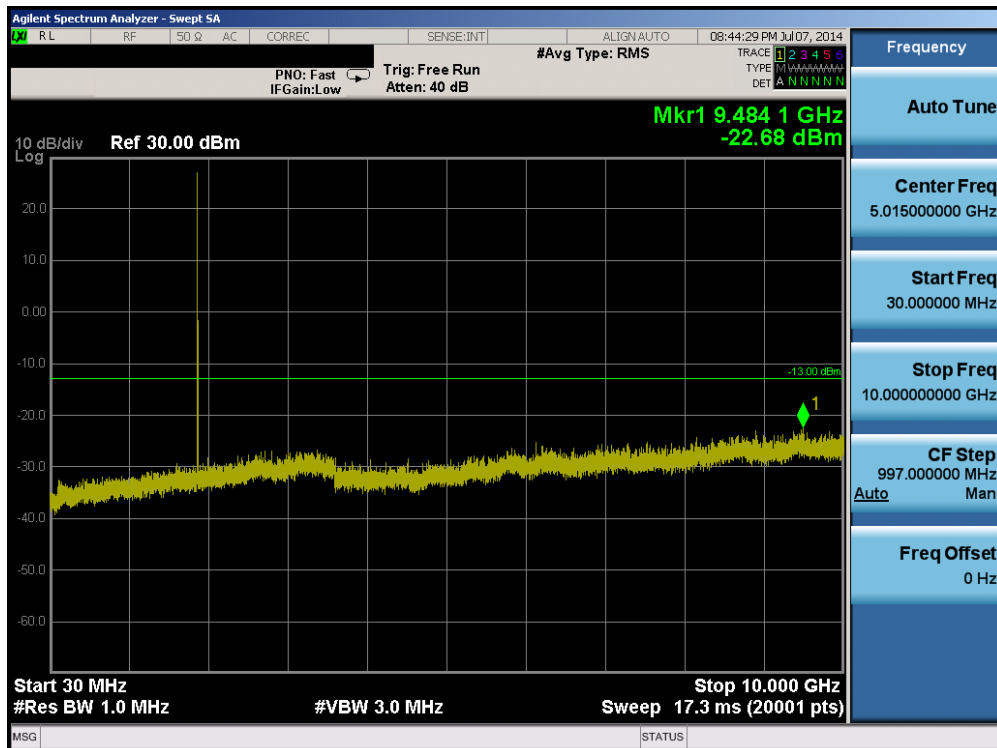


Plot 6-11. Conducted Spurious Plot (Band 25 – 1.4MHz QPSK – RB Size 1, RB Offset 0 – Mid Channel)

FCC ID: A3LSPHL720T		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407011336.	Test Dates: 7/3 - 7/7/2014	EUT Type: Portable Handset		Page 19 of 82

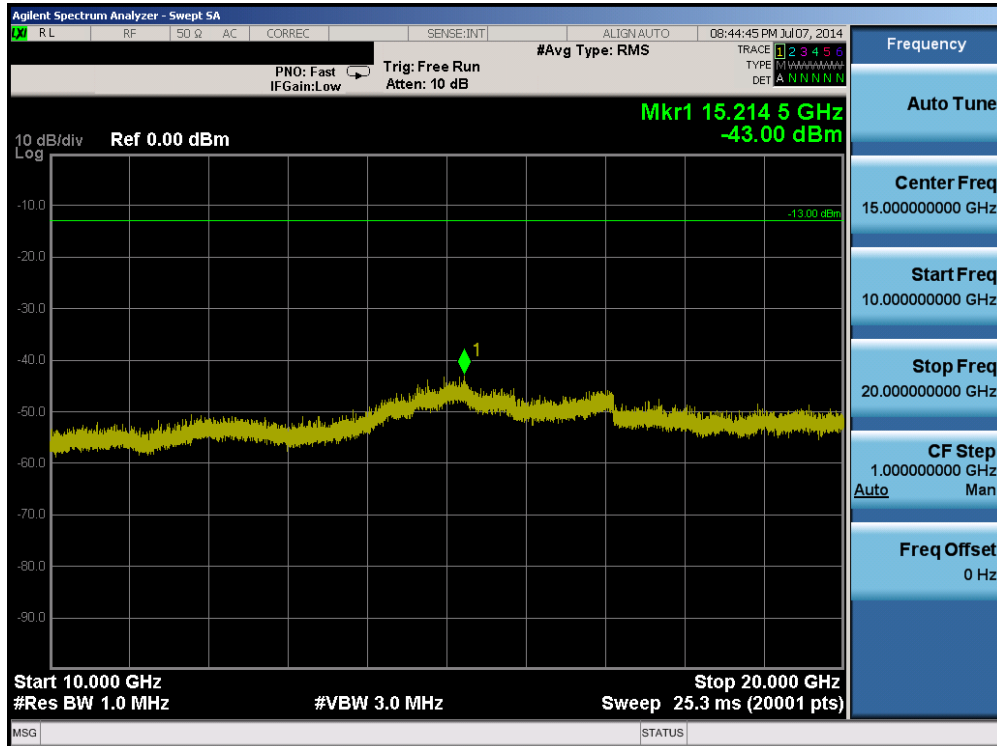


Plot 6-12. Conducted Spurious Plot (Band 25 – 1.4MHz QPSK – RB Size 1, RB Offset 0 – Mid Channel)

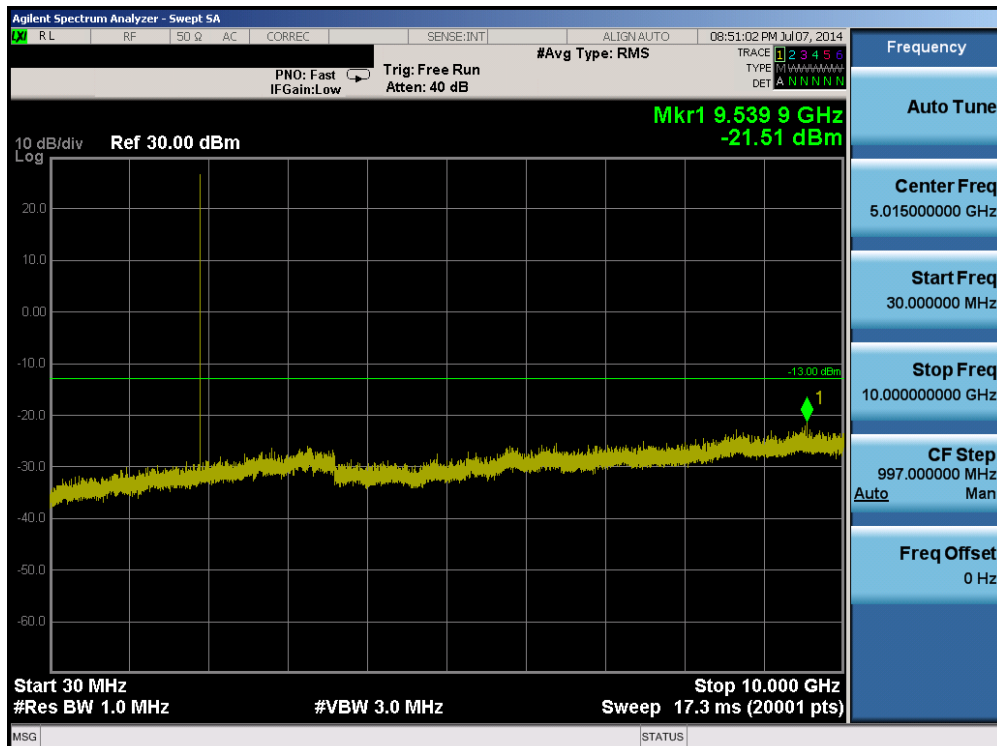


Plot 6-13. Conducted Spurious Plot (Band 25 – 1.4MHz QPSK – RB Size 1, RB Offset 0 – High Channel)

FCC ID: A3LSPHL720T		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407011336.	Test Dates: 7/3 - 7/7/2014	EUT Type: Portable Handset		Page 20 of 82

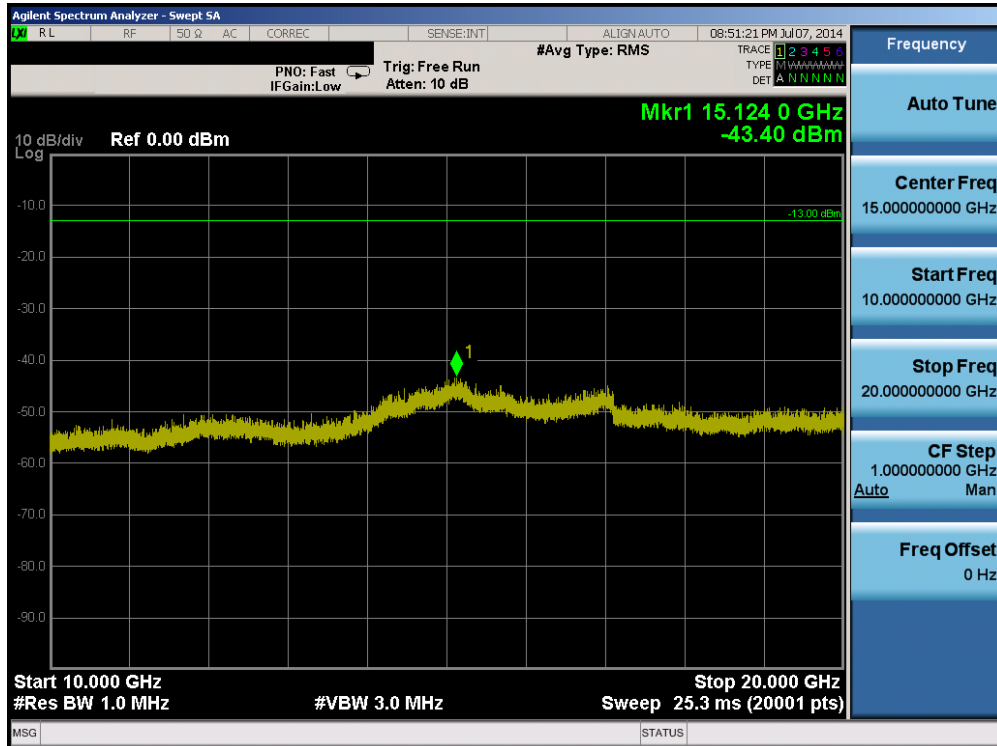


Plot 6-14. Conducted Spurious Plot (Band 25 – 1.4MHz QPSK – RB Size 1, RB Offset 0 – High Channel)

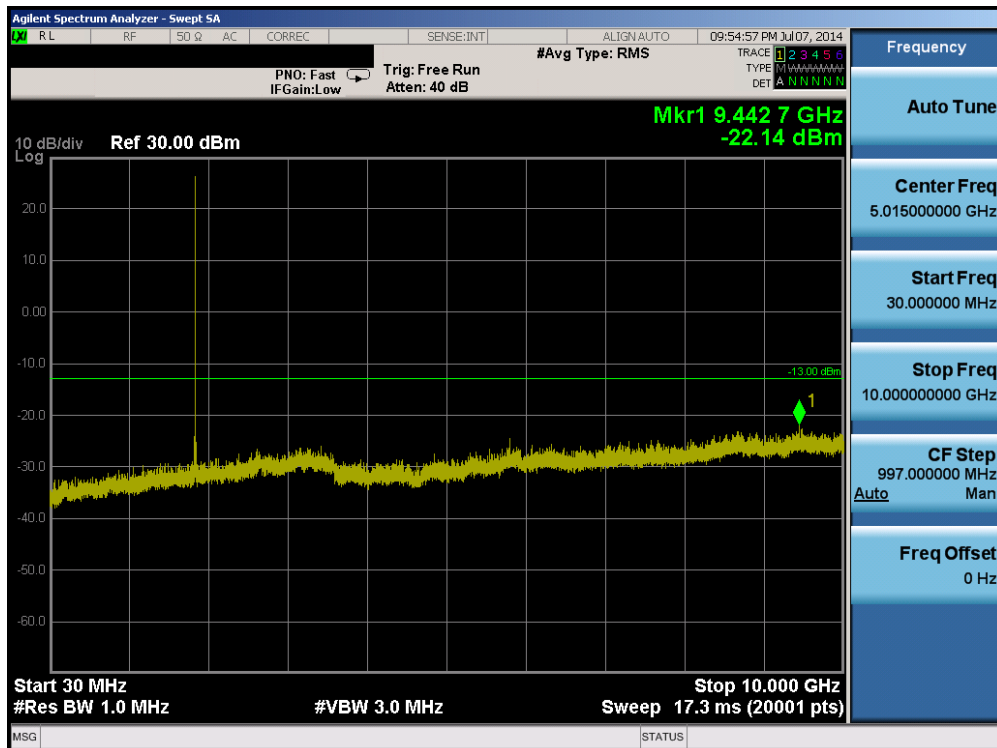


Plot 6-15. Conducted Spurious Plot (Band 25 – 15.0MHz QPSK – RB Size 1, RB Offset 0 – Low Channel)

FCC ID: A3LSPHL720T	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1407011336.	Test Dates: 7/3 - 7/7/2014	EUT Type: Portable Handset		Page 21 of 82

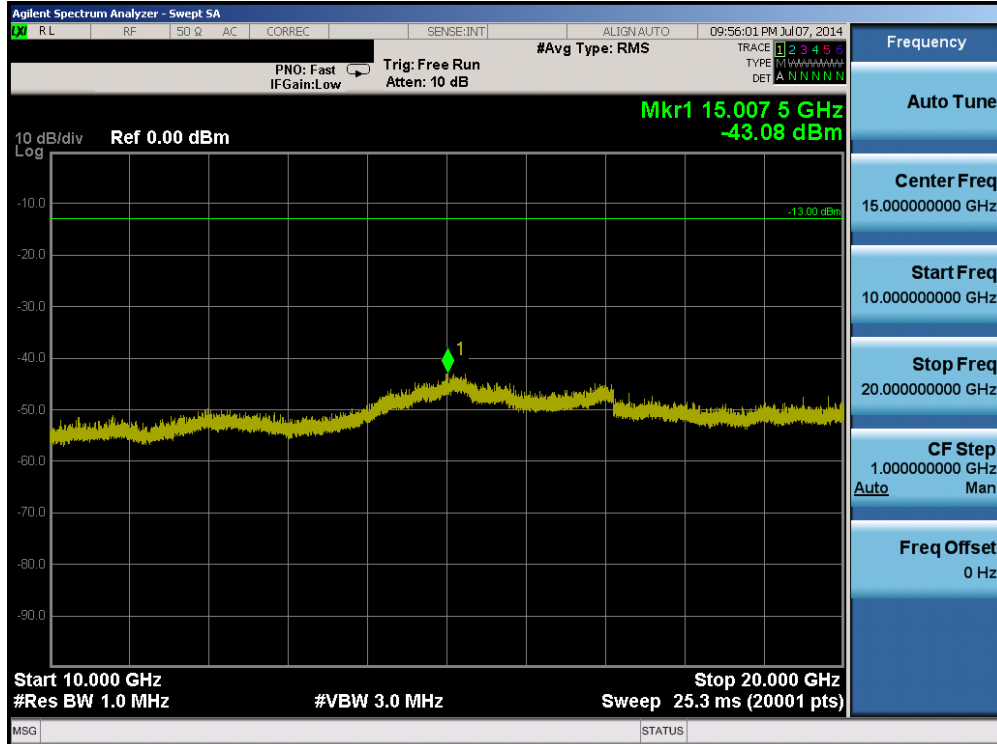


Plot 6-16. Conducted Spurious Plot (Band 25 – 15.0MHz QPSK – RB Size 1, RB Offset 0 – Low Channel)

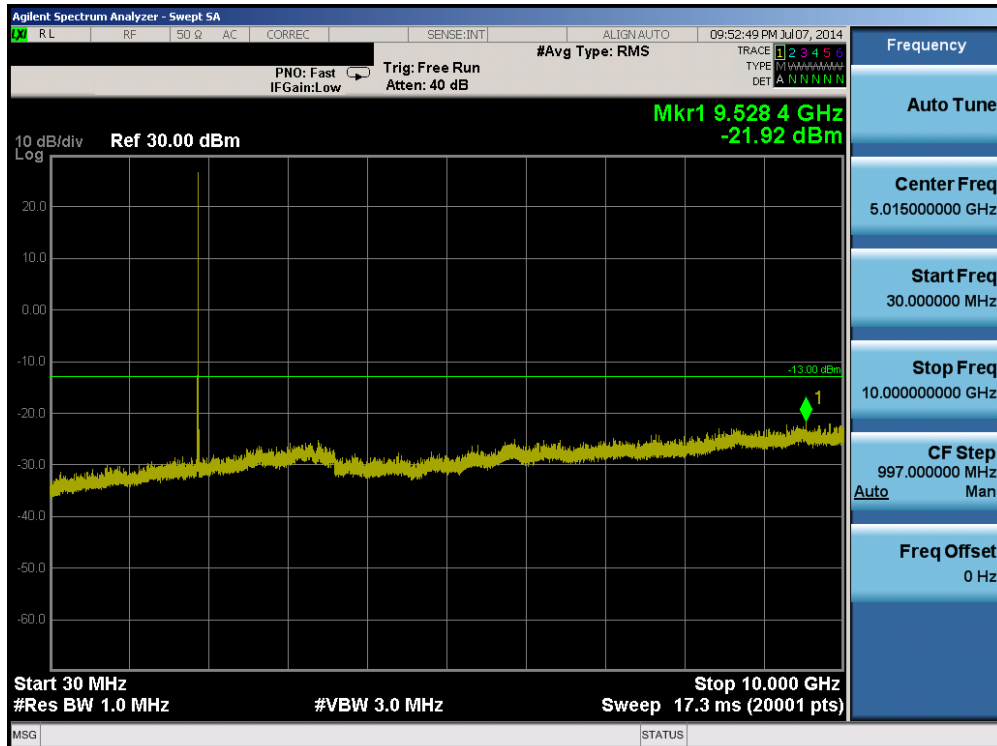


Plot 6-17. Conducted Spurious Plot (Band 25 – 15.0MHz QPSK – RB Size 1, RB Offset 0 – Mid Channel)

FCC ID: A3LSPHL720T		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407011336.	Test Dates: 7/3 - 7/7/2014	EUT Type: Portable Handset		Page 22 of 82

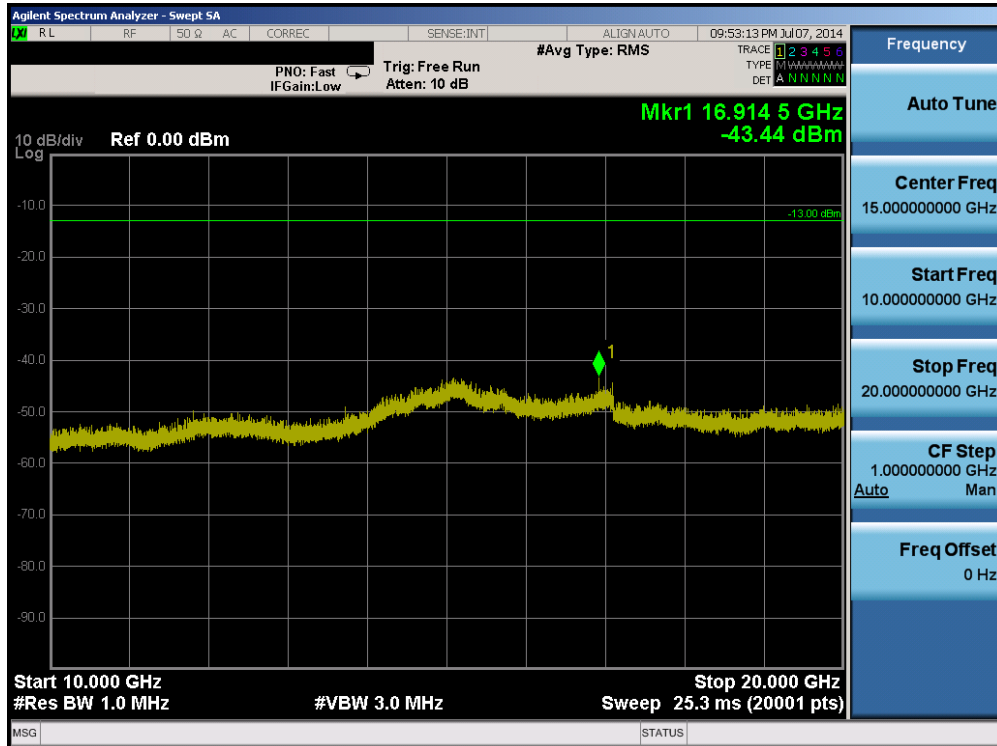


Plot 6-18. Conducted Spurious Plot (Band 25 – 15.0MHz QPSK – RB Size 1, RB Offset 0 – Mid Channel)

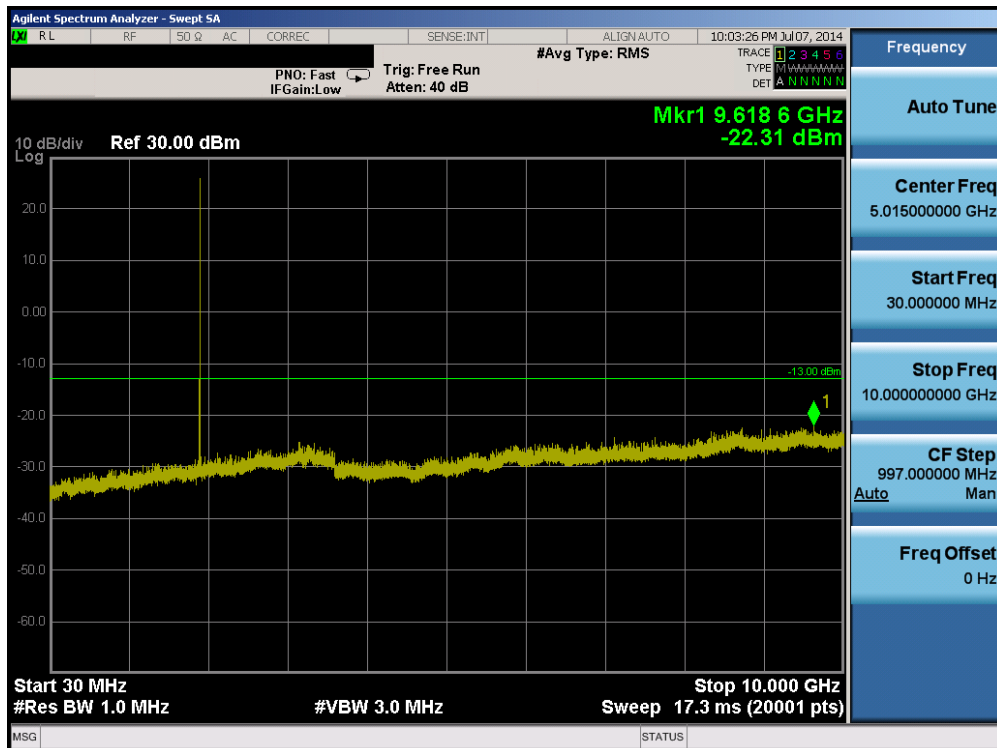


Plot 6-19. Conducted Spurious Plot (Band 25 – 15.0MHz QPSK – RB Size 1, RB Offset 0 – High Channel)

FCC ID: A3LSPHL720T		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407011336.	Test Dates: 7/3 - 7/7/2014	EUT Type: Portable Handset		Page 23 of 82

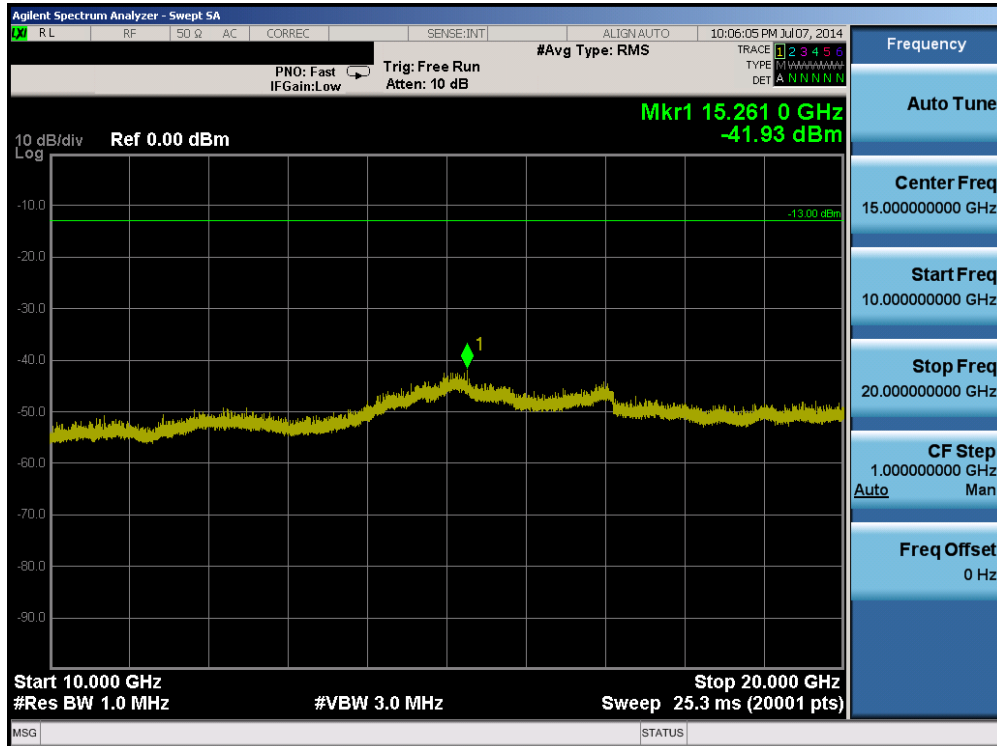


Plot 6-20. Conducted Spurious Plot (Band 25 – 15.0MHz QPSK – RB Size 1, RB Offset 0 – High Channel)

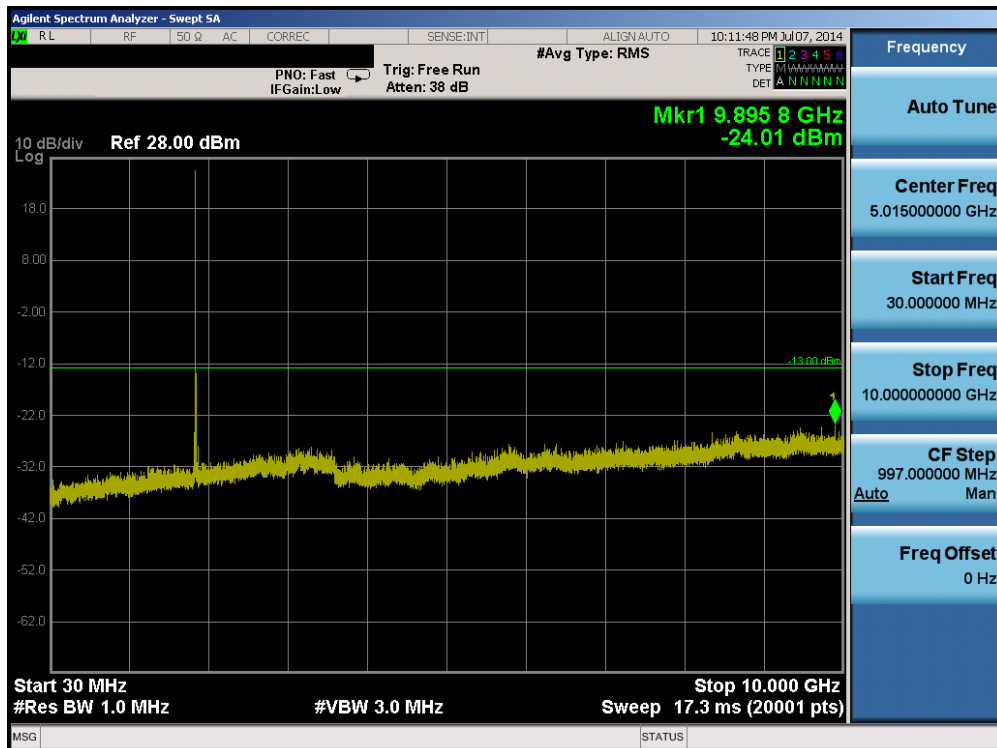


Plot 6-21. Conducted Spurious Plot (Band 25 – 20.0MHz QPSK – RB Size 1, RB Offset 0– Low Channel)

FCC ID: A3LSPHL720T		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407011336.	Test Dates: 7/3 - 7/7/2014	EUT Type: Portable Handset		Page 24 of 82

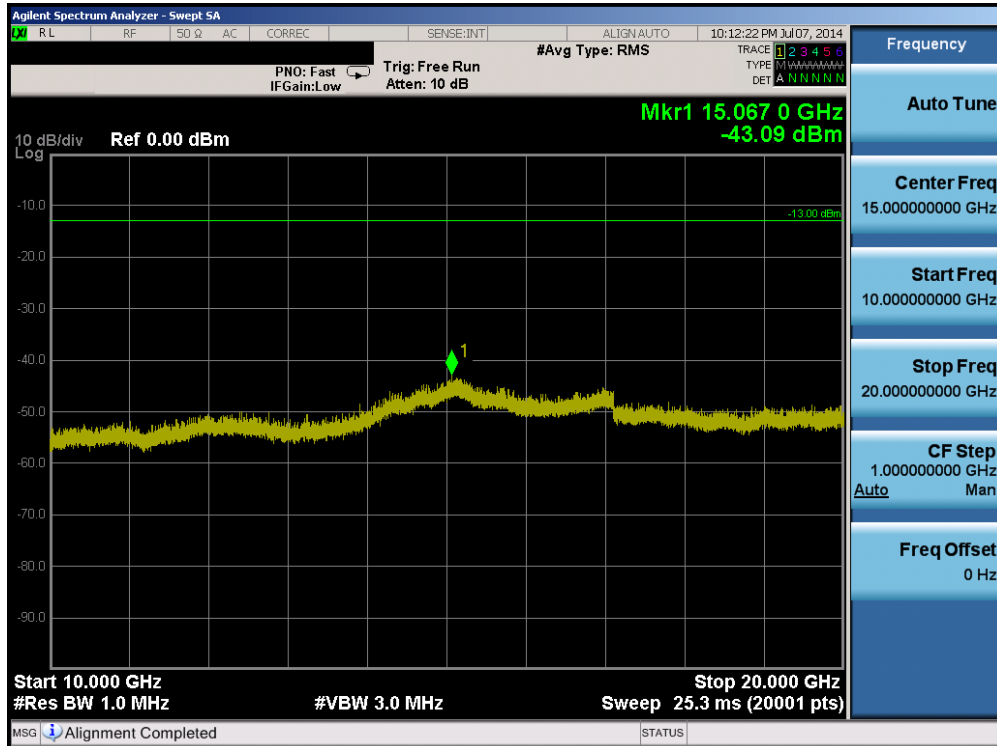


Plot 6-22. Conducted Spurious Plot (Band 25 – 20.0MHz QPSK – RB Size 1, RB Offset 0 – Low Channel)

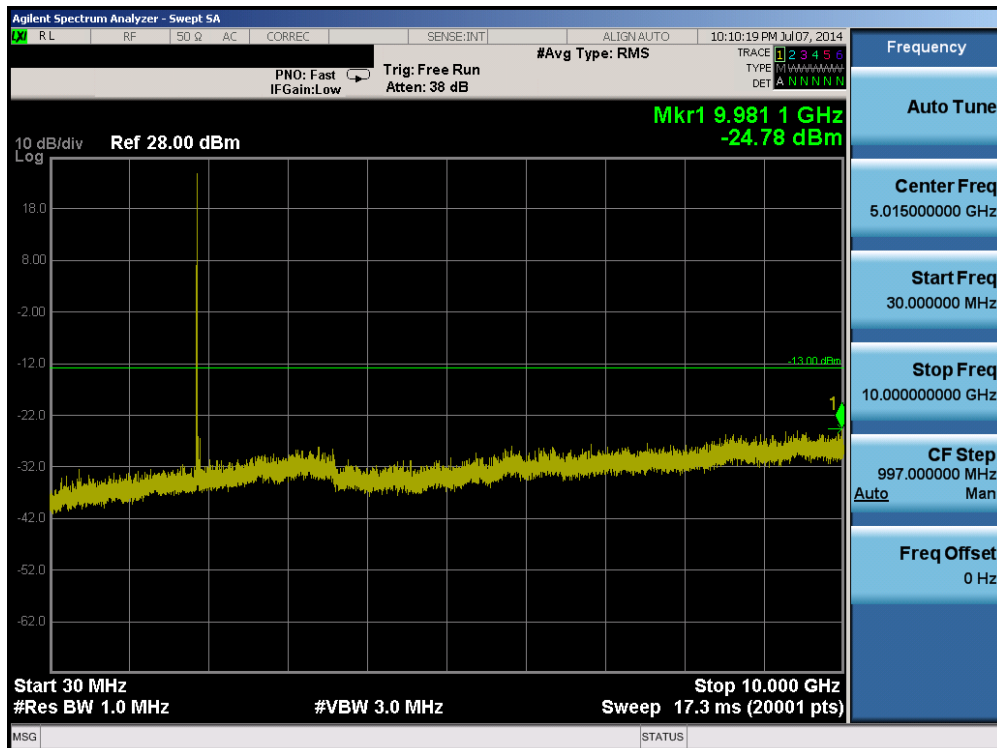


Plot 6-23. Conducted Spurious Plot (Band 25 – 20.0MHz QPSK – RB Size 1, RB Offset 0 – Mid Channel)

FCC ID: A3LSPHL720T		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407011336.	Test Dates: 7/3 - 7/7/2014	EUT Type: Portable Handset		Page 25 of 82

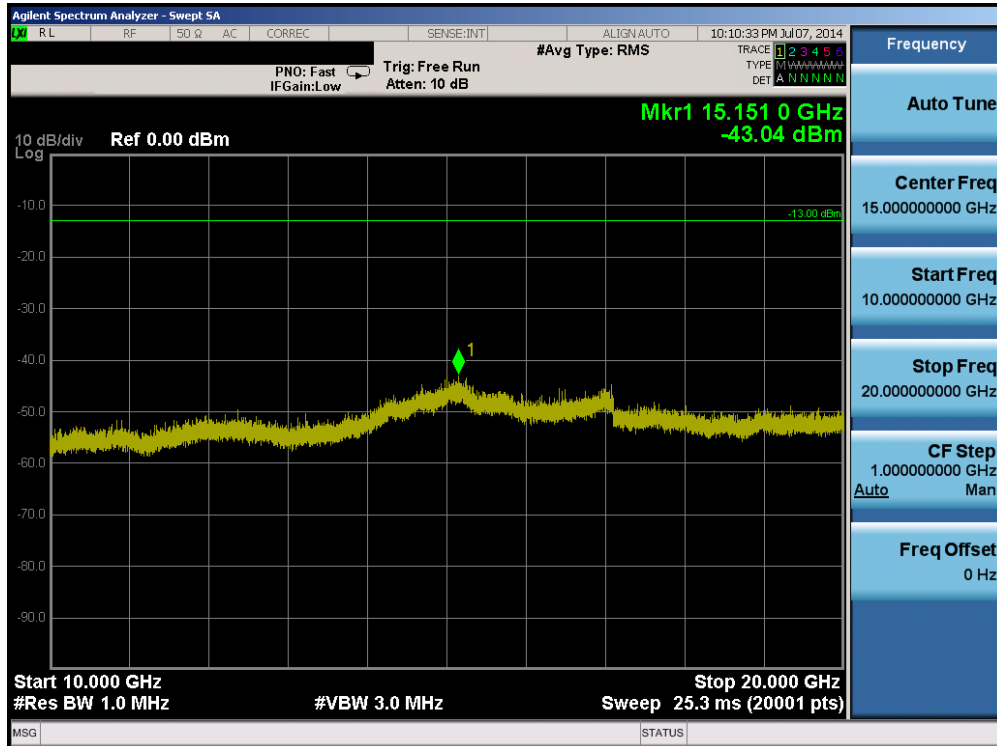


Plot 6-24. Conducted Spurious Plot (Band 25 – 20.0MHz QPSK – RB Size 1, RB Offset 0 – Mid Channel)

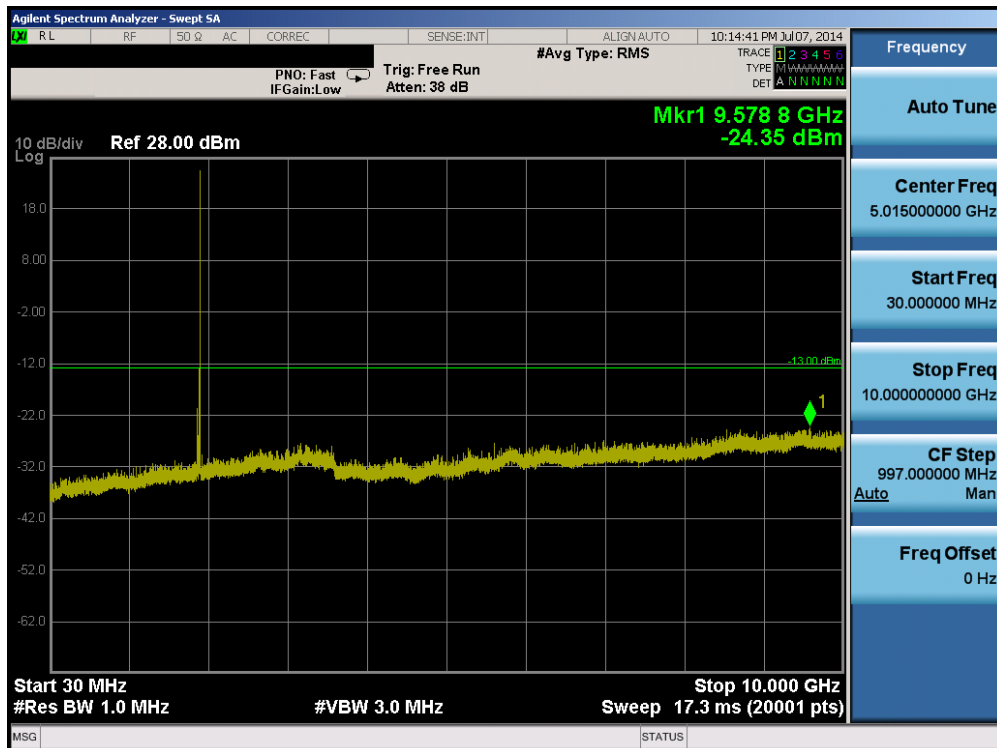


Plot 6-25. Conducted Spurious Plot (Band 25 – 20.0MHz QPSK – RB Size 1, RB Offset 0 – High Channel)

FCC ID: A3LSPHL720T		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407011336.	Test Dates: 7/3 - 7/7/2014	EUT Type: Portable Handset		Page 26 of 82

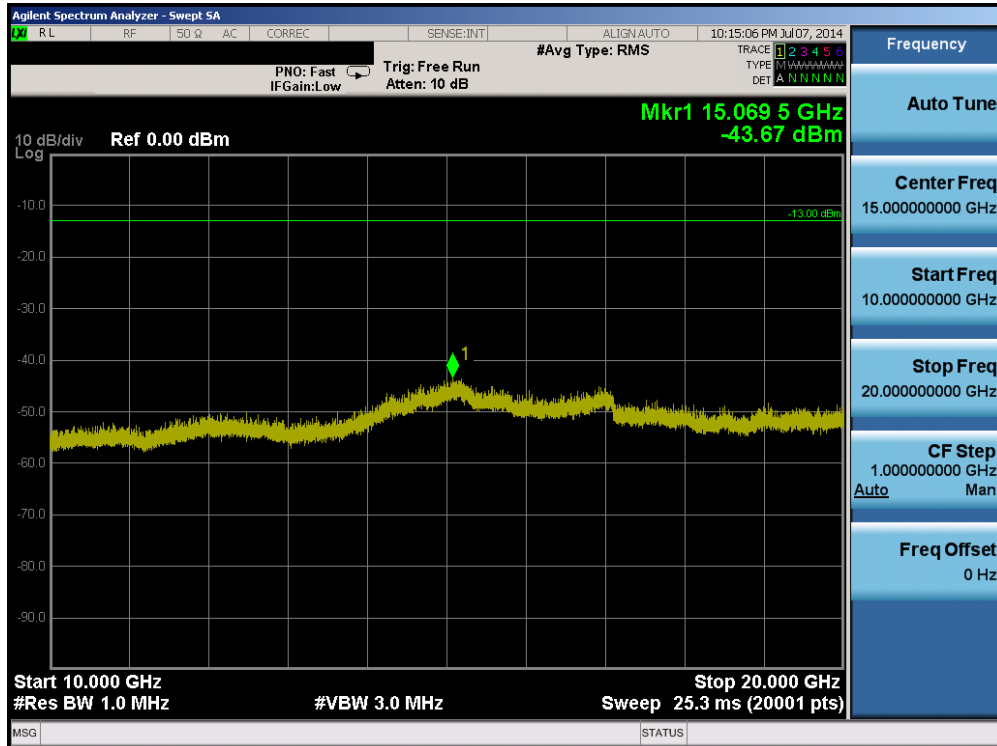


Plot 6-26. Conducted Spurious Plot (Band 25 – 20.0MHz QPSK – RB Size 1, RB Offset 0 – High Channel)

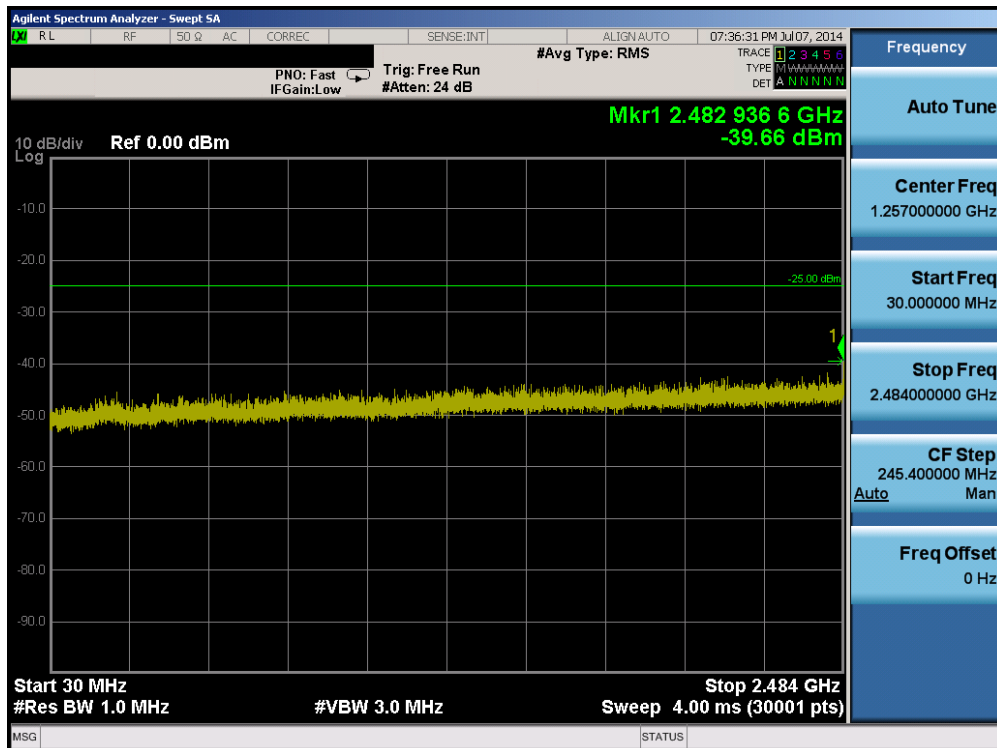


Plot 6-27. Conducted Spurious Plot (Band 41 – 5.0MHz QPSK – RB Size 25, RB Offset 0 – Low Channel)

FCC ID: A3LSPHL720T		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407011336.	Test Dates: 7/3 - 7/7/2014	EUT Type: Portable Handset		Page 27 of 82

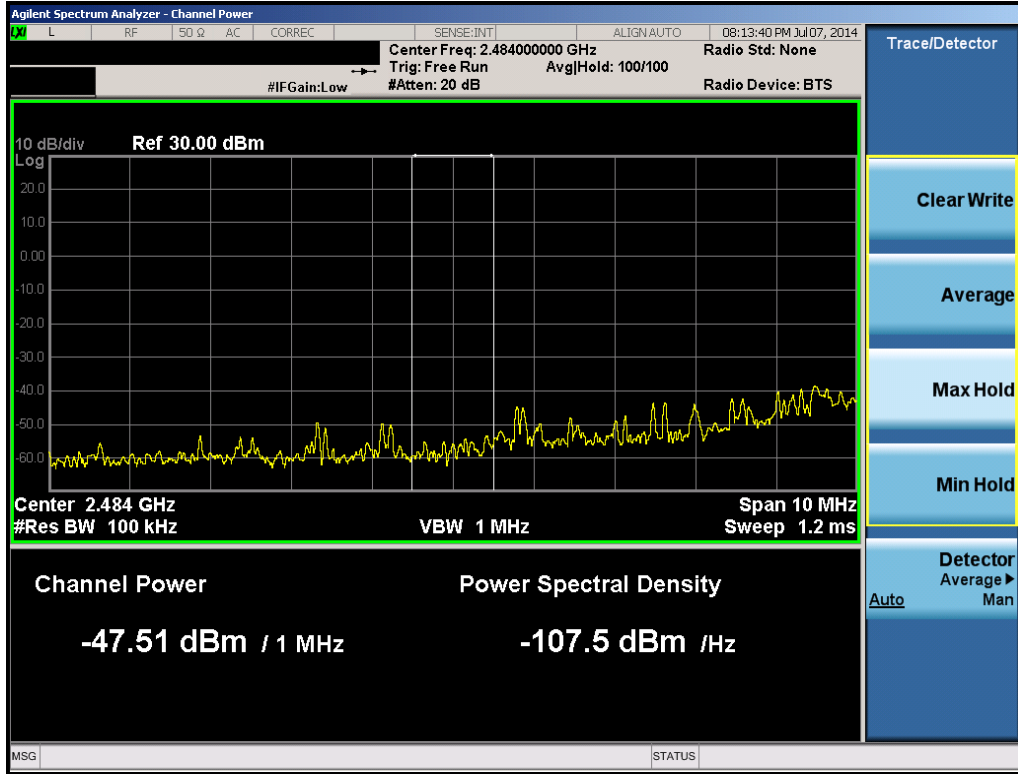


Plot 6-28. 1MHz Integration (Band 41 – 5.0MHz QPSK – RB Size 25, RB Offset 0 – Low Channel)

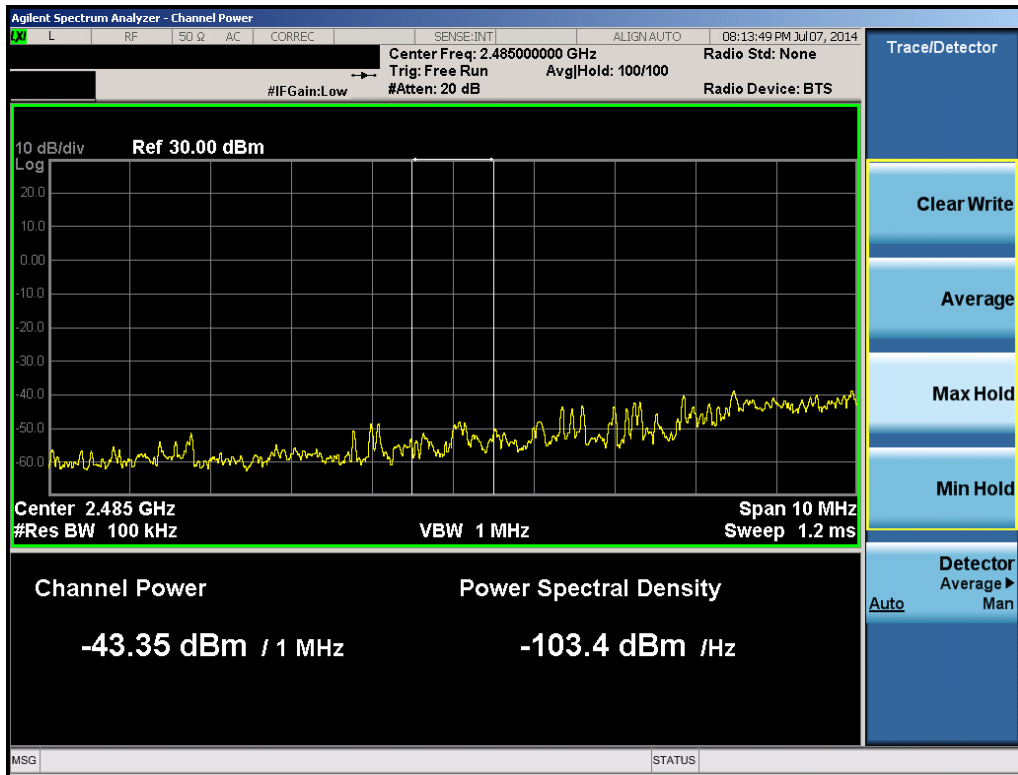


Plot 6-29. 1MHz Integration (Band 41 – 5.0MHz QPSK – RB Size 25, RB Offset 0 – Low Channel)

FCC ID: A3LSPHL720T		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407011336.	Test Dates: 7/3 - 7/7/2014	EUT Type: Portable Handset		Page 28 of 82

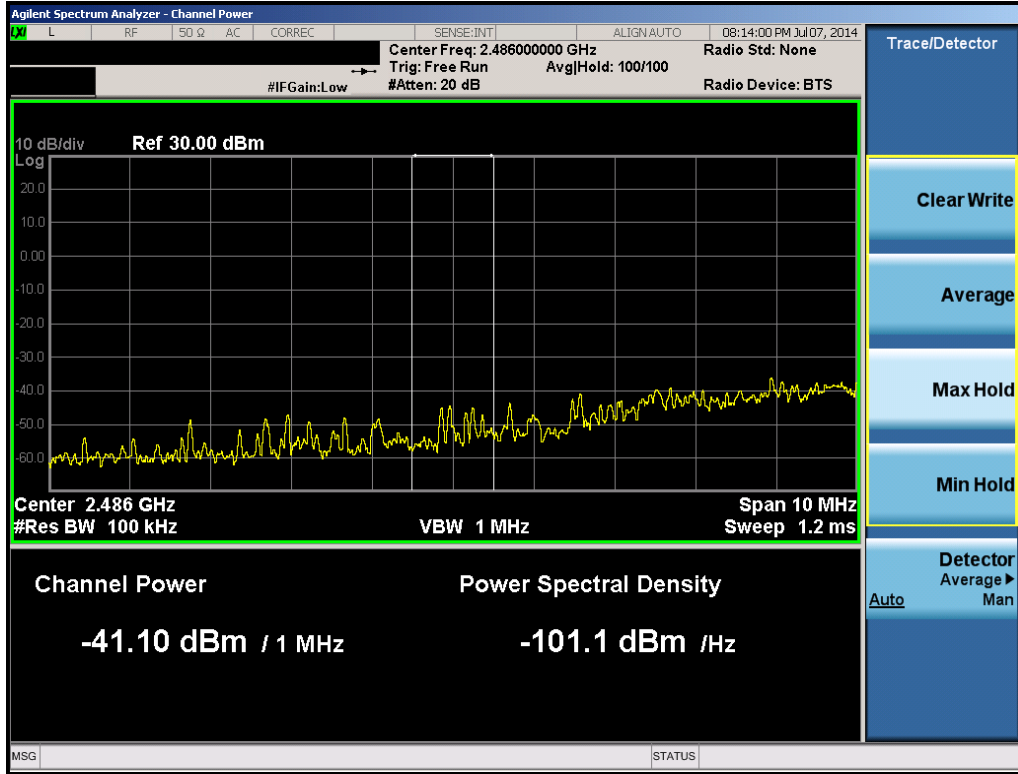


Plot 6-30. 1MHz Integration (Band 41 – 5.0MHz QPSK – RB Size 25, RB Offset 0 – Low Channel)

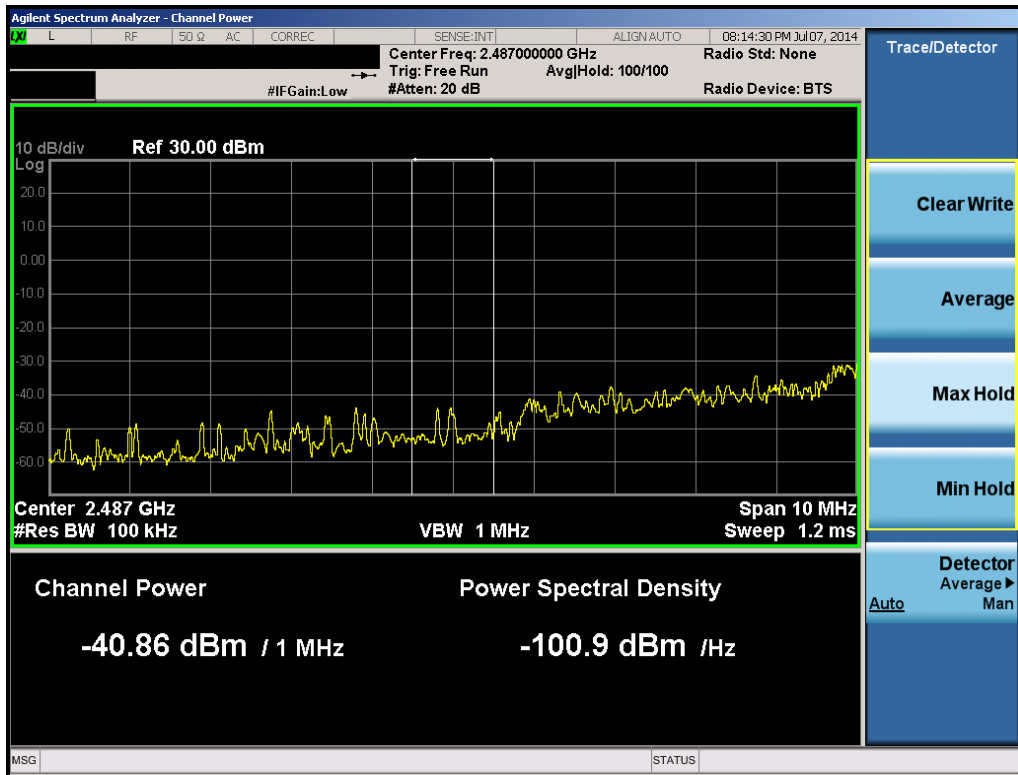


Plot 6-31. 1MHz Integration (Band 41 – 5.0MHz QPSK – RB Size 25, RB Offset 0 – Low Channel)

FCC ID: A3LSPHL720T		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407011336.	Test Dates: 7/3 - 7/7/2014	EUT Type: Portable Handset		Page 29 of 82

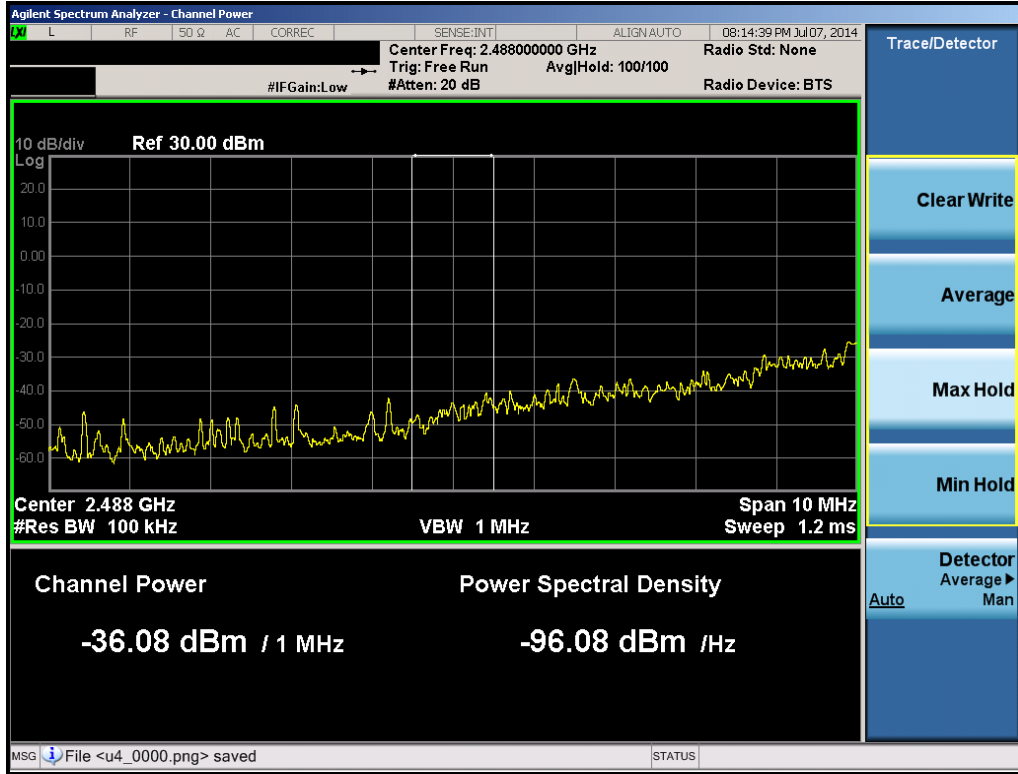


Plot 6-32. 1MHz Integration (Band 41 – 5.0MHz QPSK – RB Size 25, RB Offset 0 – Low Channel)

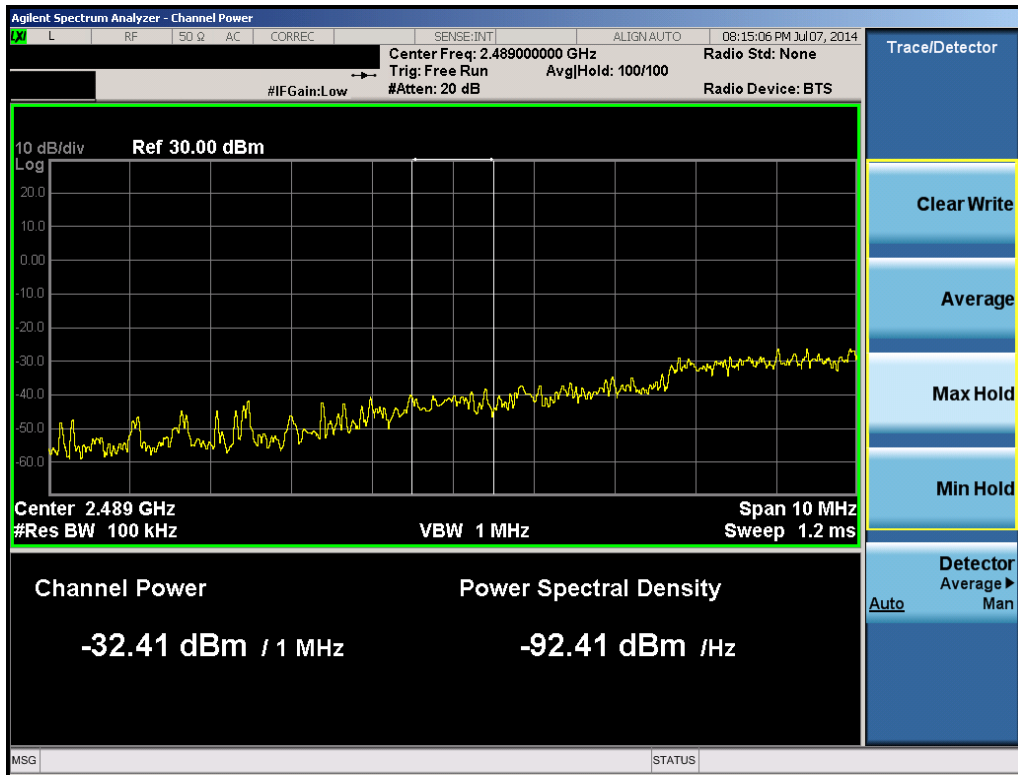


Plot 6-33. 1MHz Integration (Band 41 – 5.0MHz QPSK – RB Size 25, RB Offset 0 – Low Channel)

FCC ID: A3LSPHL720T		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407011336.	Test Dates: 7/3 - 7/7/2014	EUT Type: Portable Handset		Page 30 of 82

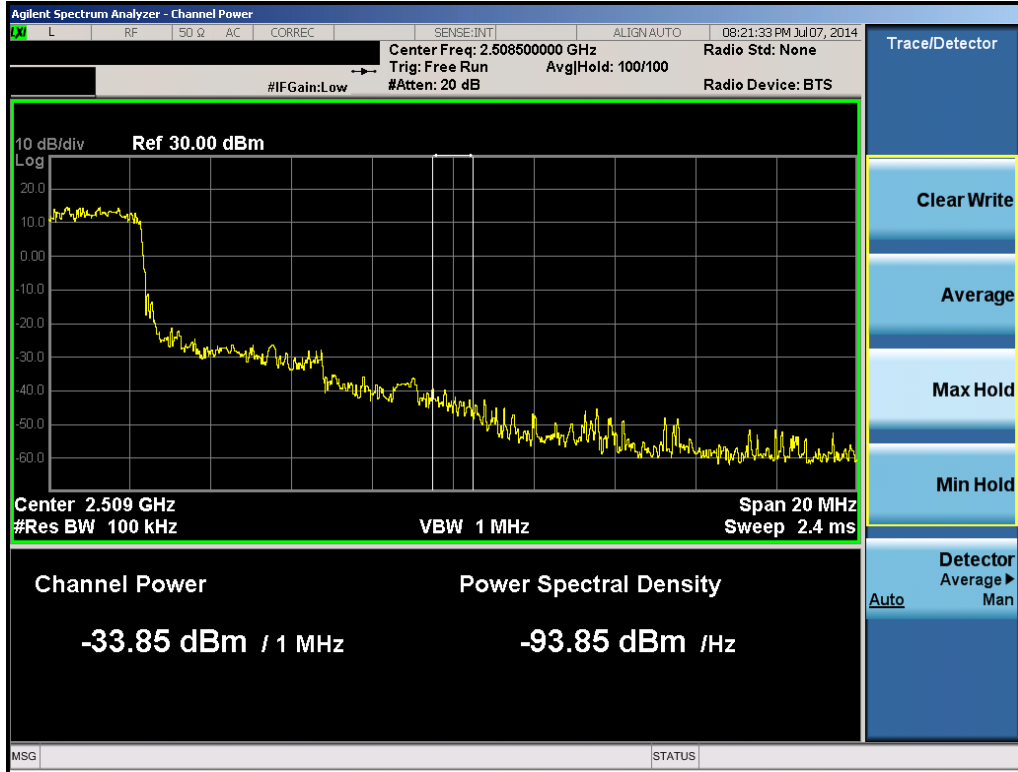


Plot 6-34. 1MHz Integration (Band 41 – 5.0MHz QPSK – RB Size 25, RB Offset 0 – Low Channel)

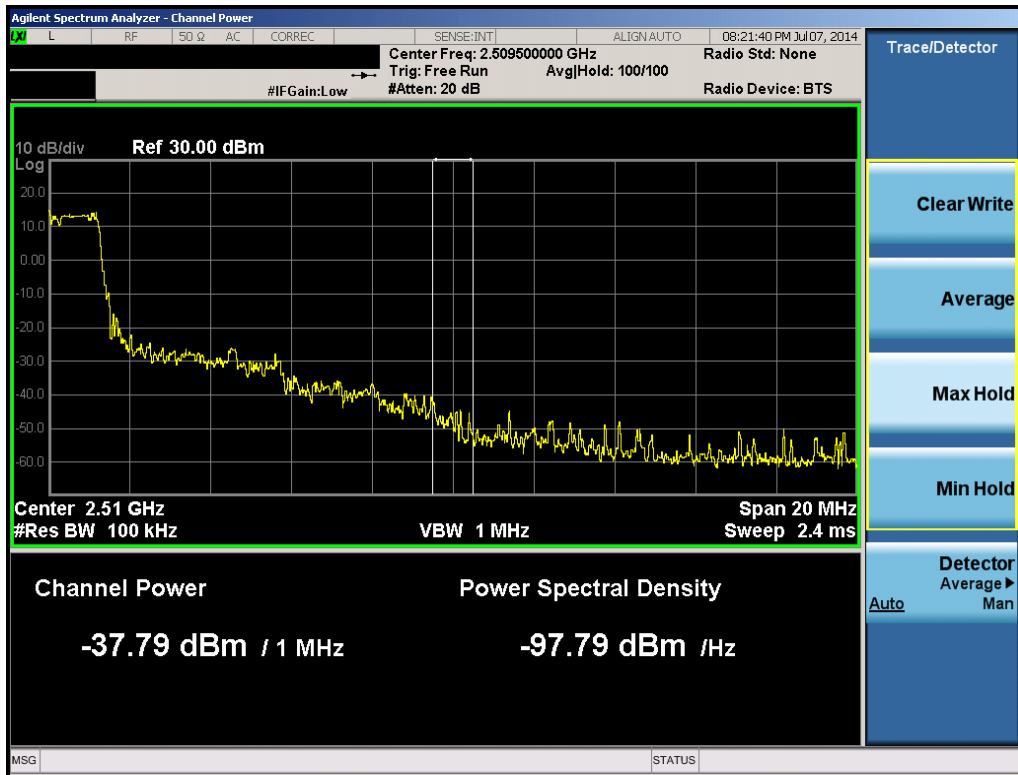


Plot 6-35. 1MHz Integration (Band 41 – 5.0MHz QPSK – RB Size 25, RB Offset 0 – Low Channel)

FCC ID: A3LSPHL720T		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407011336.	Test Dates: 7/3 - 7/7/2014	EUT Type: Portable Handset		Page 31 of 82

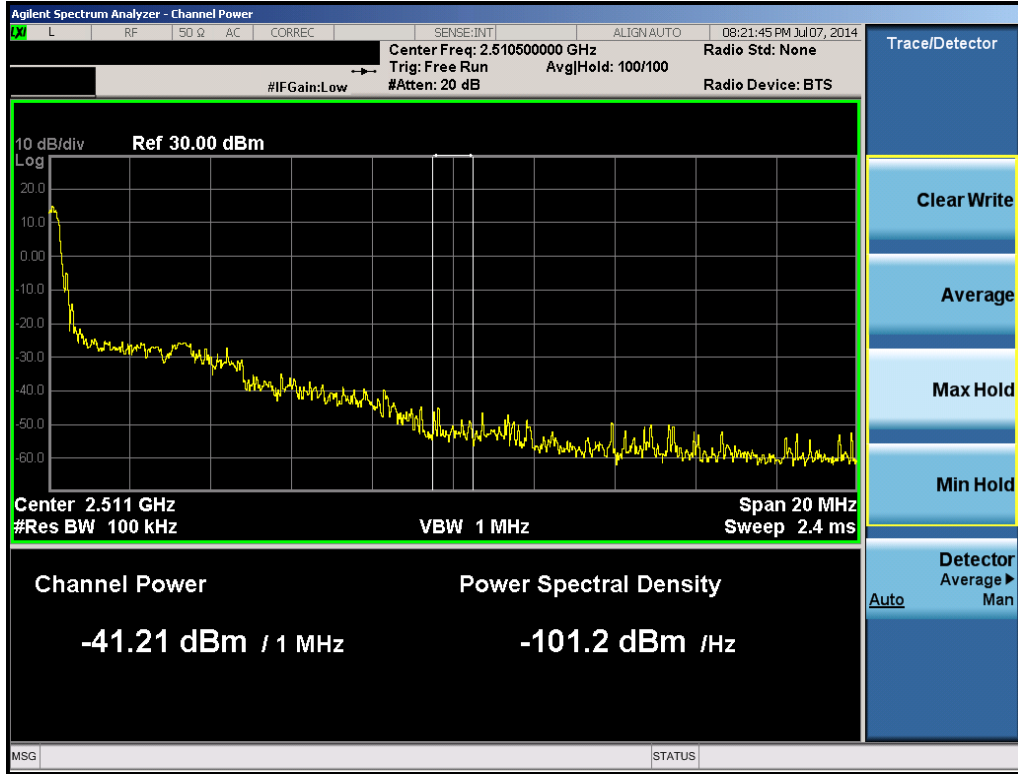


Plot 6-36. 1MHz Integration (Band 41 – 5.0MHz QPSK – RB Size 25, RB Offset 0 – Low Channel)

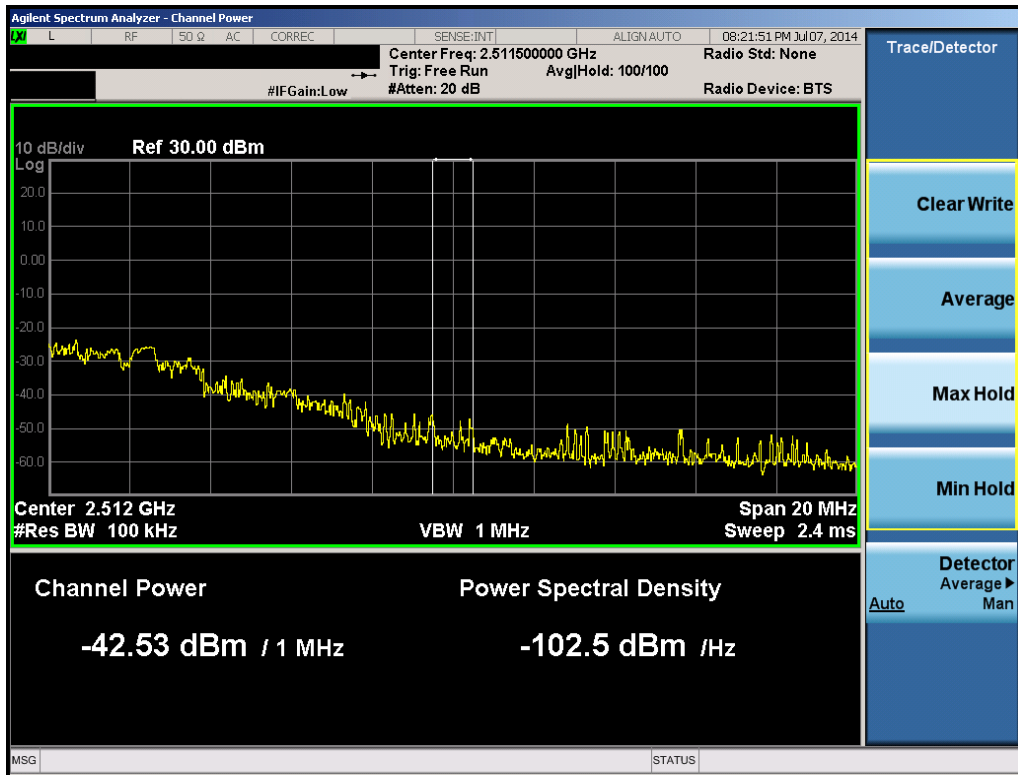


Plot 6-37. 1MHz Integration (Band 41 – 5.0MHz QPSK – RB Size 25, RB Offset 0 – Low Channel)

FCC ID: A3LSPHL720T		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407011336.	Test Dates: 7/3 - 7/7/2014	EUT Type: Portable Handset		Page 32 of 82

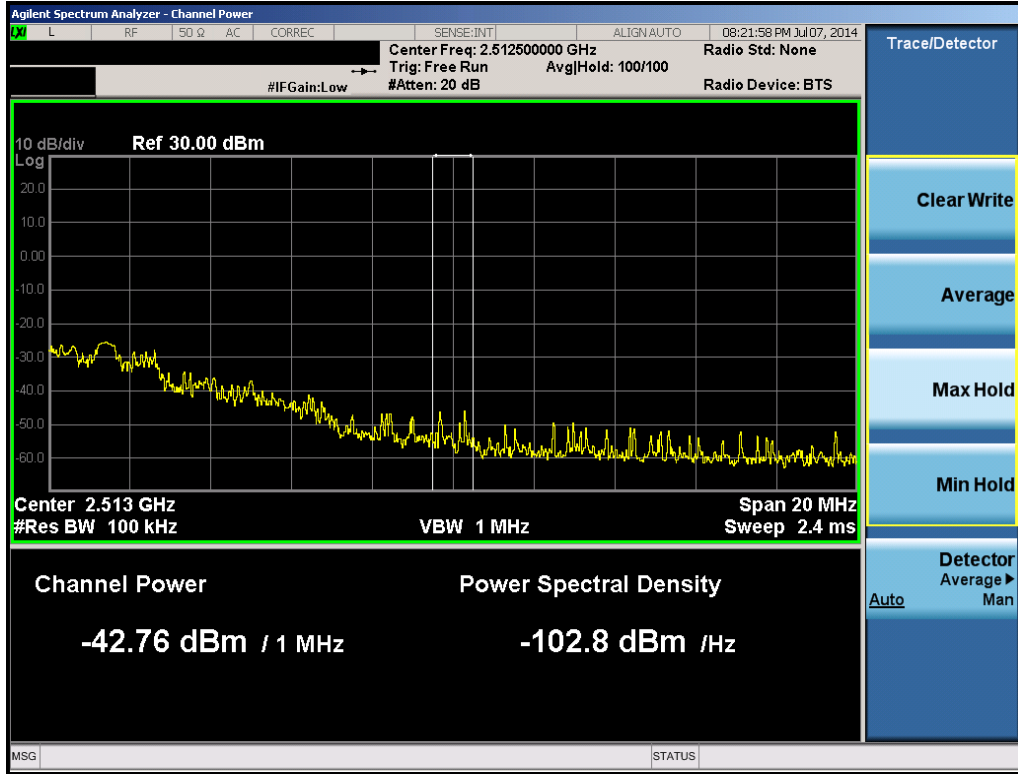


Plot 6-38. 1MHz Integration (Band 41 – 5.0MHz QPSK – RB Size 25, RB Offset 0 – Low Channel)

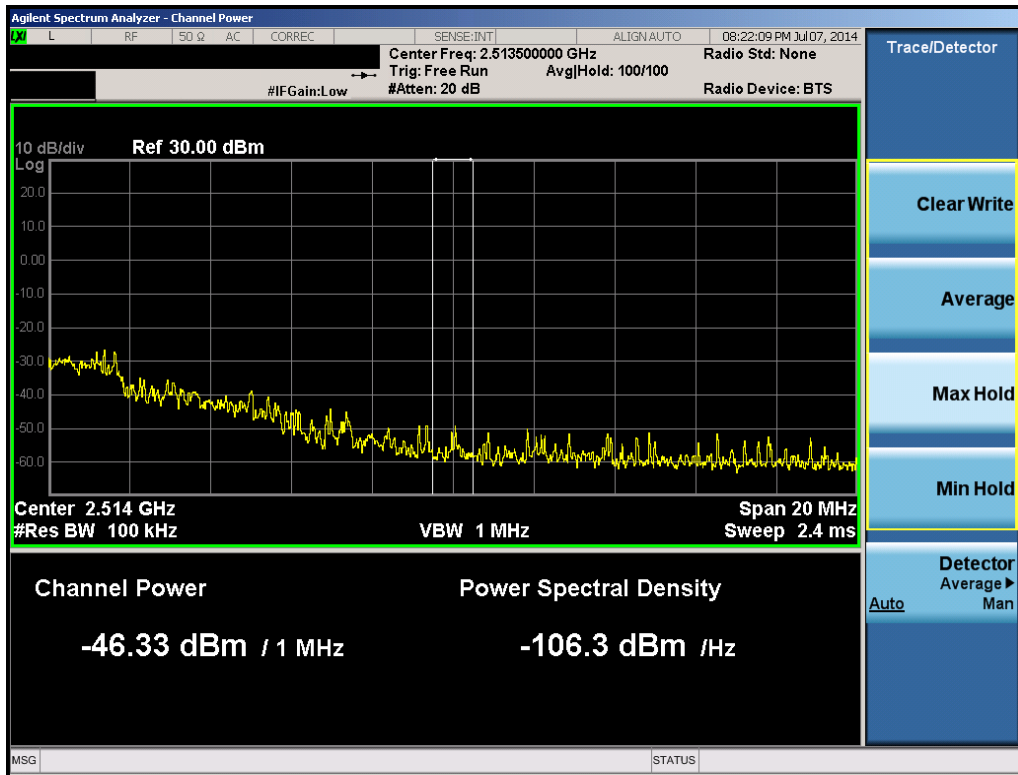


Plot 6-39. 1MHz Integration (Band 41 – 5.0MHz QPSK – RB Size 25, RB Offset 0 – Low Channel)

FCC ID: A3LSPHL720T		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407011336.	Test Dates: 7/3 - 7/7/2014	EUT Type: Portable Handset		Page 33 of 82

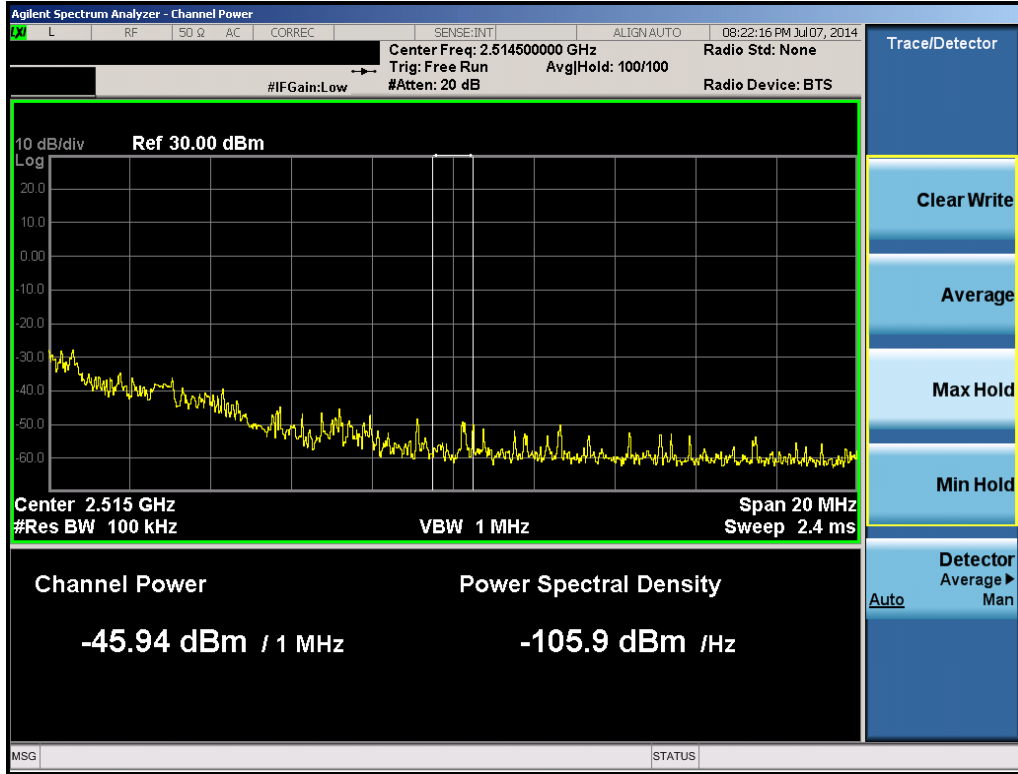


Plot 6-40. 1MHz Integration (Band 41 – 5.0MHz QPSK – RB Size 25, RB Offset 0 – Low Channel)

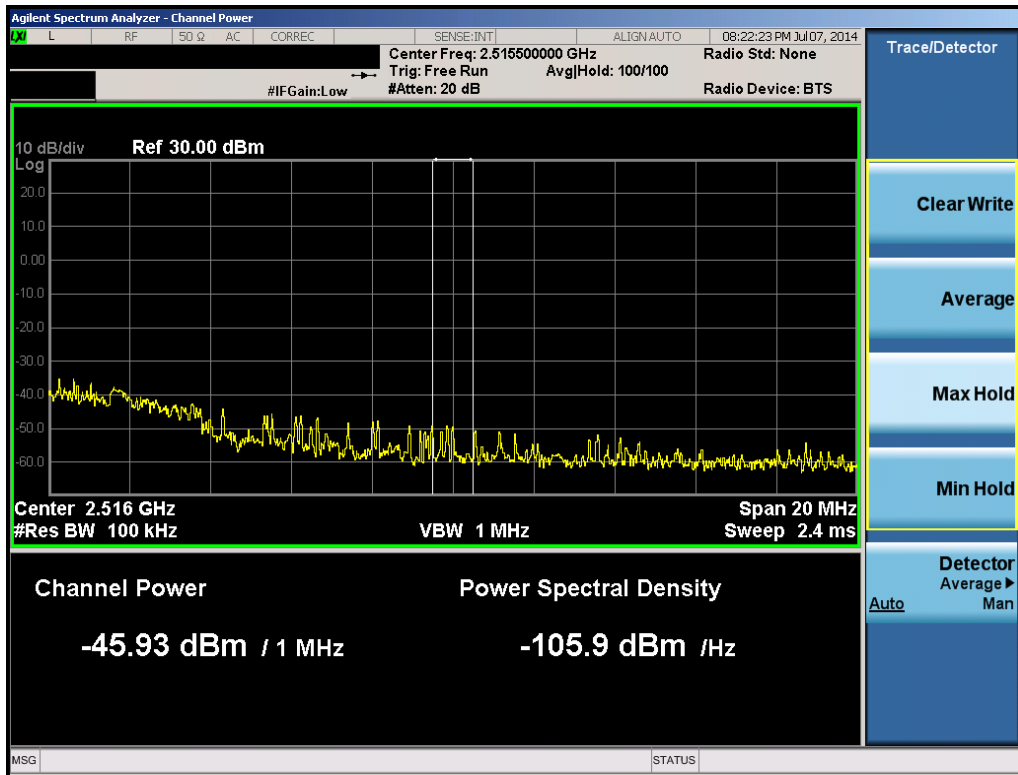


Plot 6-41. 1MHz Integration (Band 41 – 5.0MHz QPSK – RB Size 25, RB Offset 0 – Low Channel)

FCC ID: A3LSPHL720T		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407011336.	Test Dates: 7/3 - 7/7/2014	EUT Type: Portable Handset		Page 34 of 82

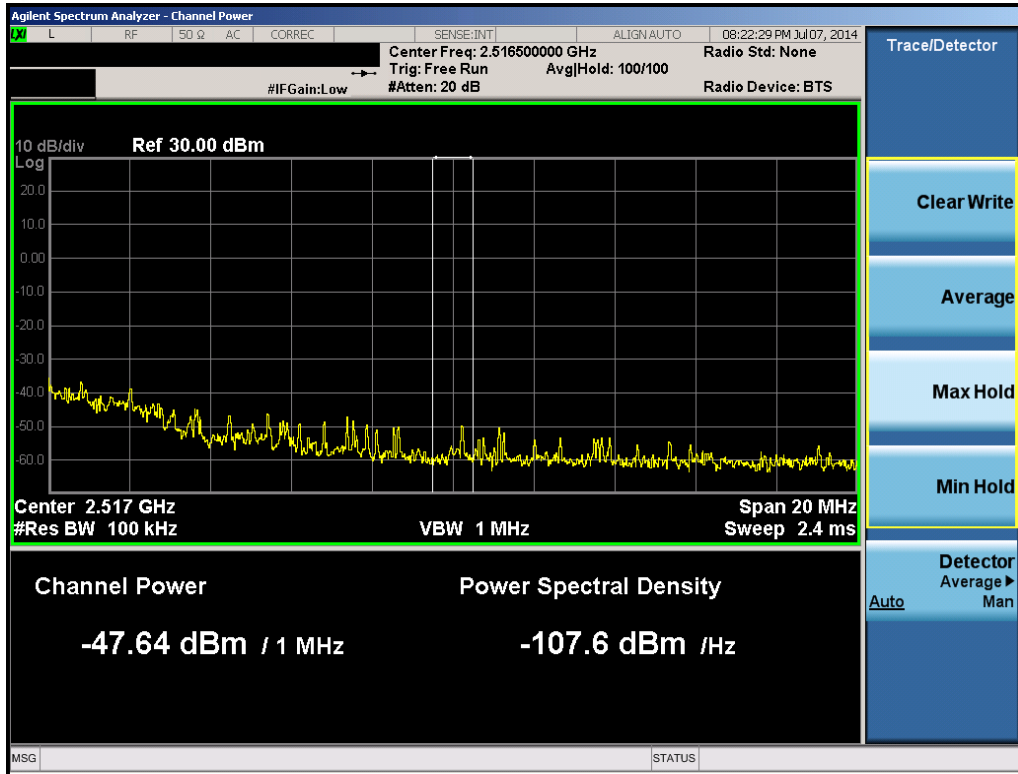


Plot 6-42. 1MHz Integration (Band 41 – 5.0MHz QPSK – RB Size 25, RB Offset 0 – Low Channel)

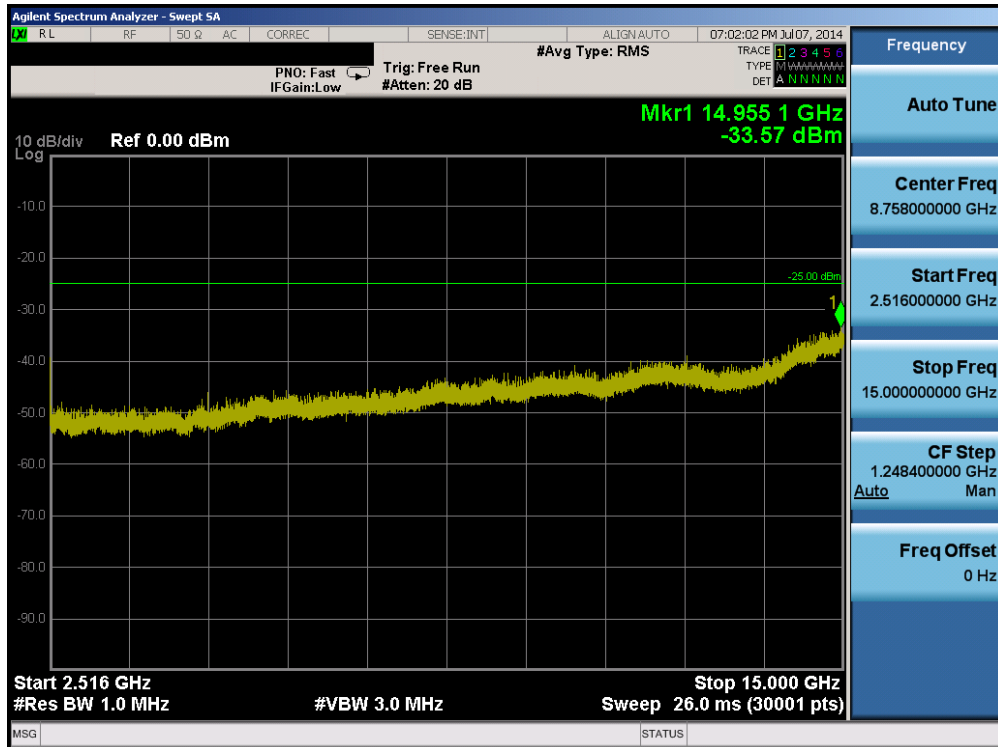


Plot 6-43. Conducted Spurious Plot (Band 41 – 5.0MHz QPSK – RB Size 25, RB Offset 0 – Low Channel)

FCC ID: A3LSPHL720T		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407011336.	Test Dates: 7/3 - 7/7/2014	EUT Type: Portable Handset		Page 35 of 82

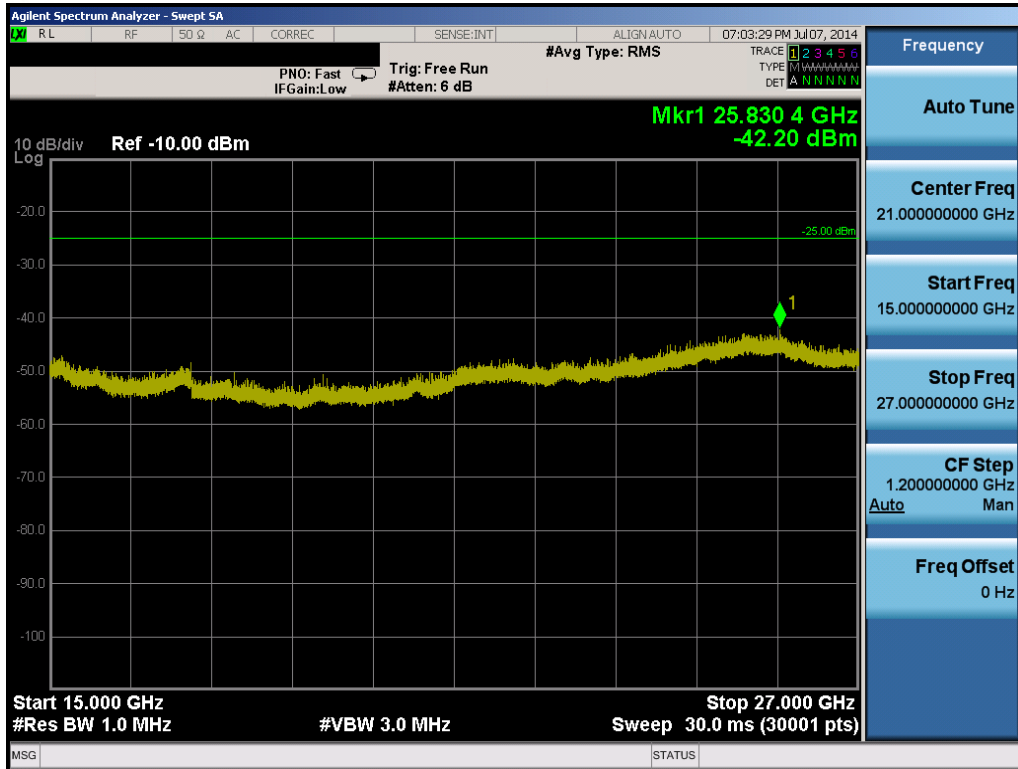


Plot 6-44. Conducted Spurious Plot (Band 41 – 5.0MHz QPSK – RB Size 25, RB Offset 0 – Low Channel)

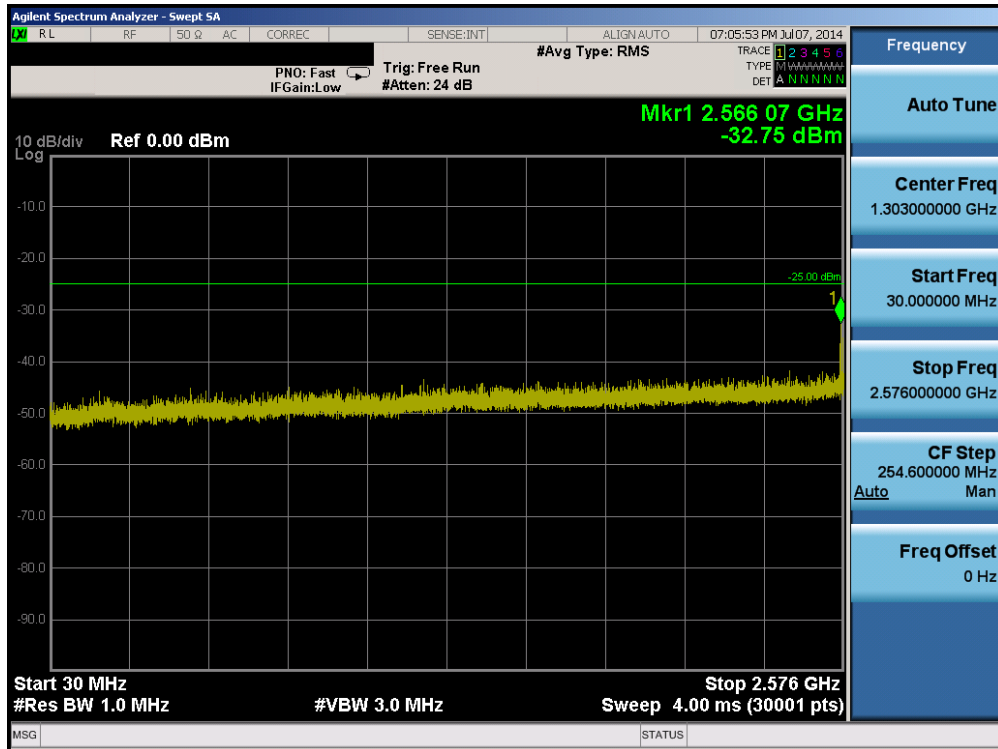


Plot 6-45. Conducted Spurious Plot (Band 41 – 5.0MHz QPSK – RB Size 25, RB Offset 0 – Mid Channel)

FCC ID: A3LSPHL720T		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407011336.	Test Dates: 7/3 - 7/7/2014	EUT Type: Portable Handset		Page 36 of 82

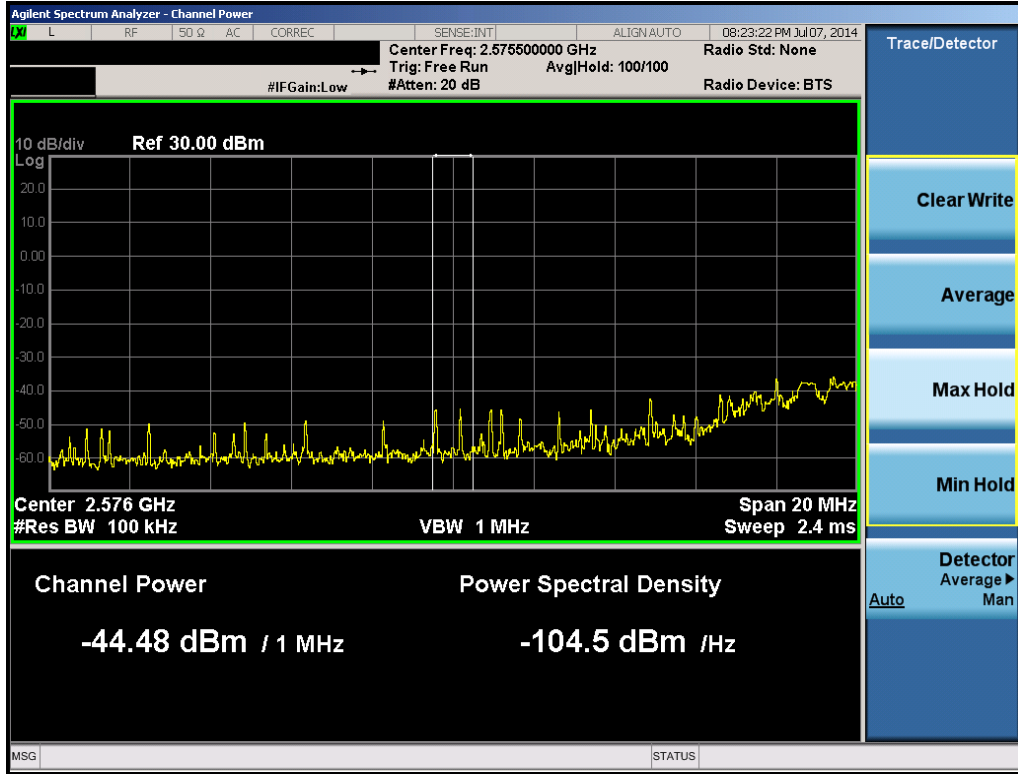


Plot 6-46. 1MHz Integration (Band 41 – 5.0MHz QPSK – RB Size 25, RB Offset 0 – Mid Channel)

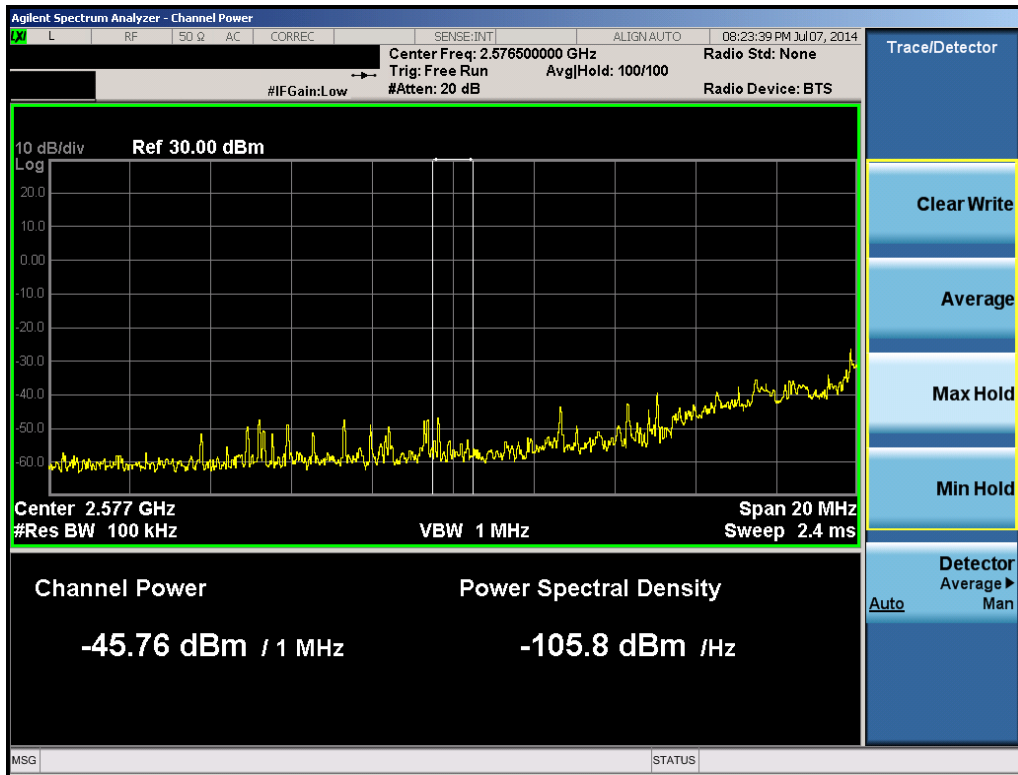


Plot 6-47. 1MHz Integration (Band 41 – 5.0MHz QPSK – RB Size 25, RB Offset 0 – Mid Channel)

FCC ID: A3LSPHL720T		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407011336.	Test Dates: 7/3 - 7/7/2014	EUT Type: Portable Handset		Page 37 of 82

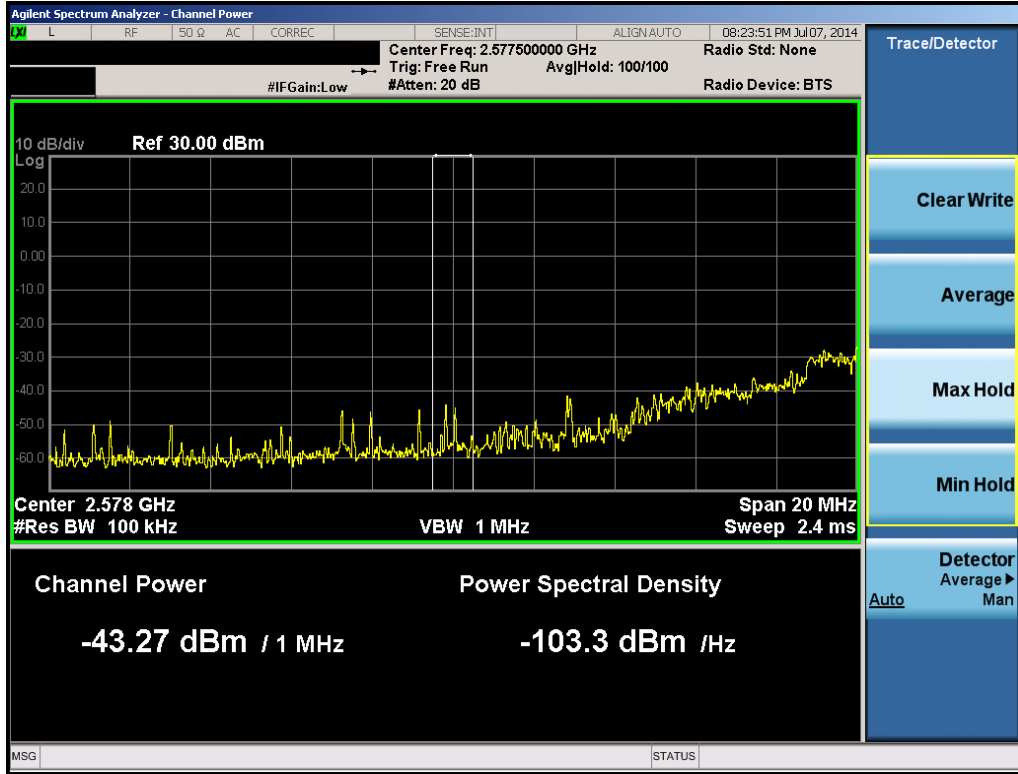


Plot 6-48. 1MHz Integration (Band 41 – 5.0MHz QPSK – RB Size 25, RB Offset 0 – Mid Channel)

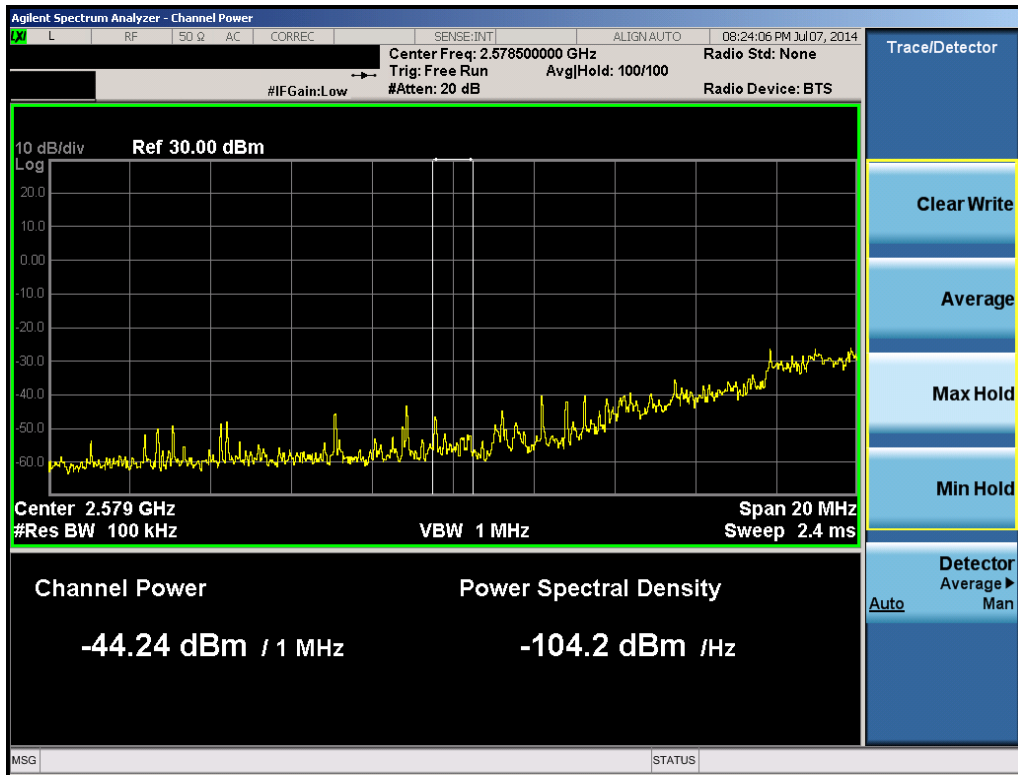


Plot 6-49. 1MHz Integration (Band 41 – 5.0MHz QPSK – RB Size 25, RB Offset 0 – Mid Channel)

FCC ID: A3LSPHL720T		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407011336.	Test Dates: 7/3 - 7/7/2014	EUT Type: Portable Handset		Page 38 of 82

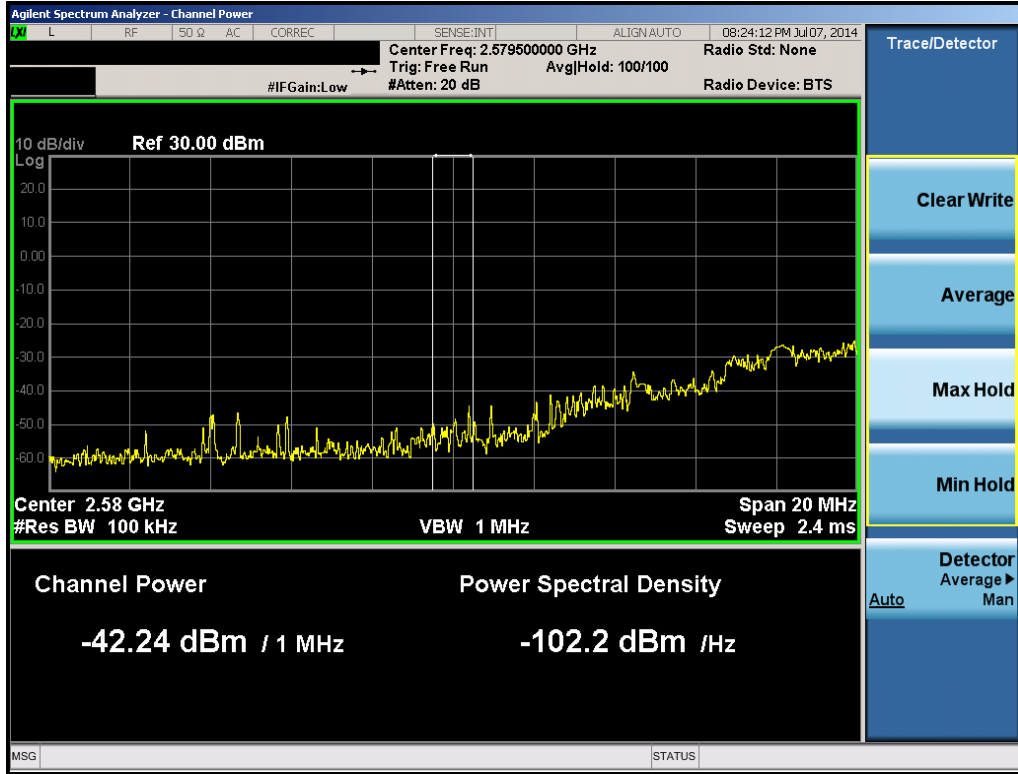


Plot 6-50. 1MHz Integration (Band 41 – 5.0MHz QPSK – RB Size 25, RB Offset 0 – Mid Channel)

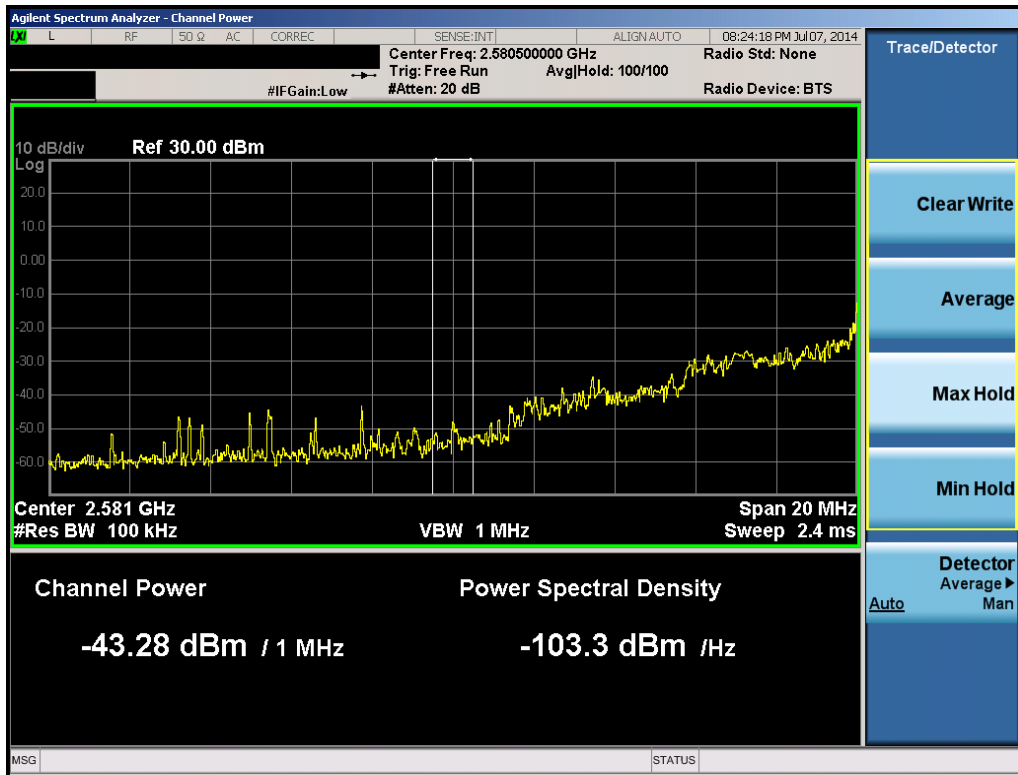


Plot 6-51. 1MHz Integration (Band 41 – 5.0MHz QPSK – RB Size 25, RB Offset 0 – Mid Channel)

FCC ID: A3LSPHL720T		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407011336.	Test Dates: 7/3 - 7/7/2014	EUT Type: Portable Handset		Page 39 of 82

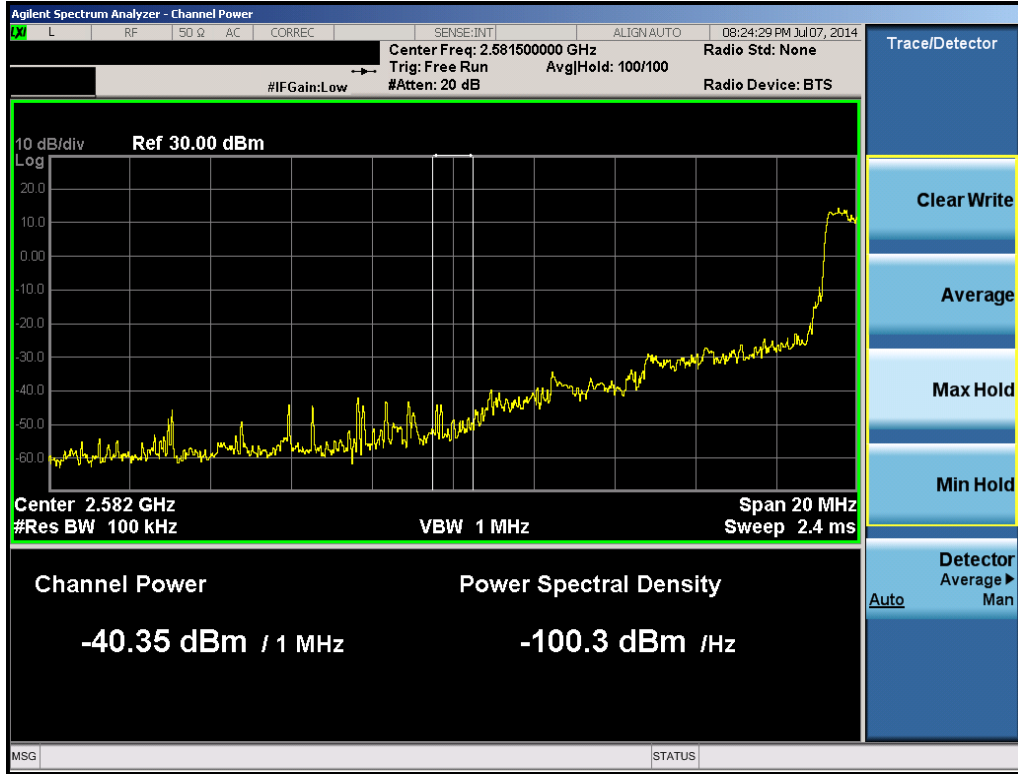


Plot 6-52. 1MHz Integration (Band 41 – 5.0MHz QPSK – RB Size 25, RB Offset 0 – Mid Channel)

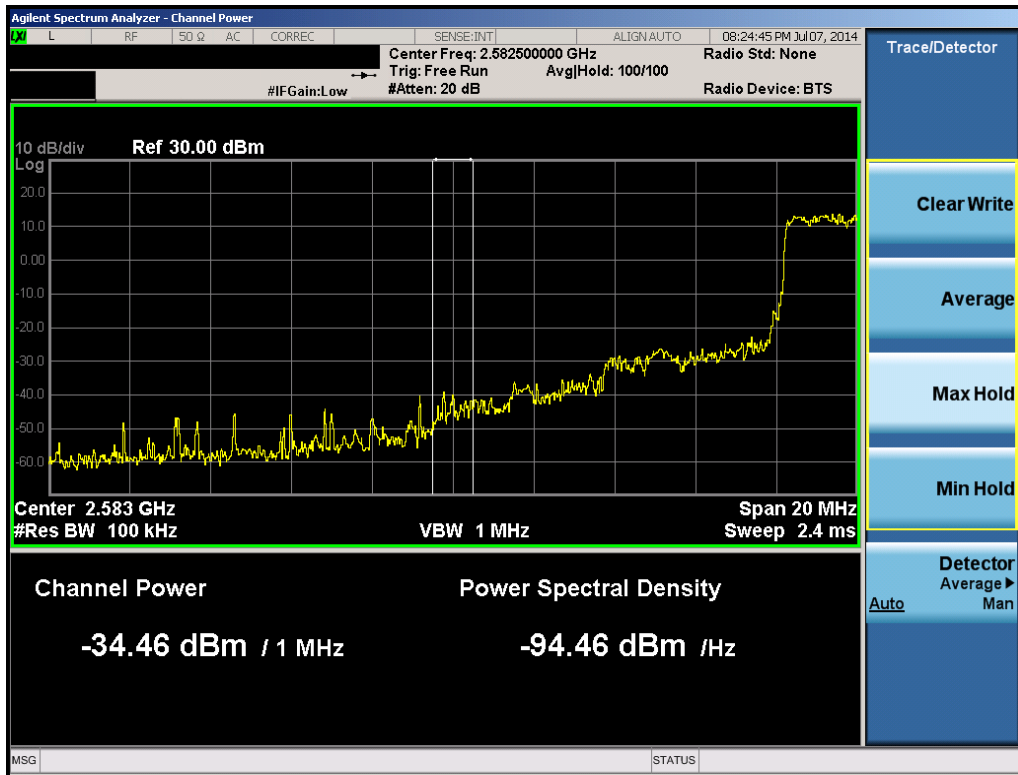


Plot 6-53. 1MHz Integration (Band 41 – 5.0MHz QPSK – RB Size 25, RB Offset 0 – Mid Channel)

FCC ID: A3LSPHL720T		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407011336.	Test Dates: 7/3 - 7/7/2014	EUT Type: Portable Handset		Page 40 of 82

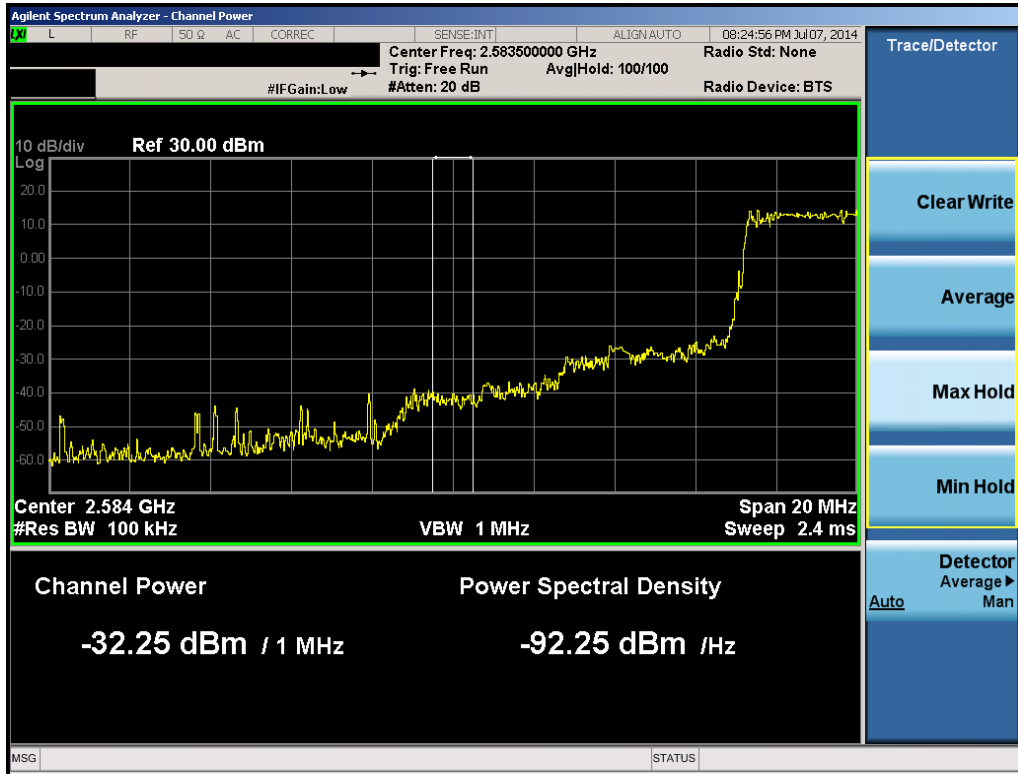


Plot 6-54. 1MHz Integration (Band 41 – 5.0MHz QPSK – RB Size 25, RB Offset 0 – Mid Channel)

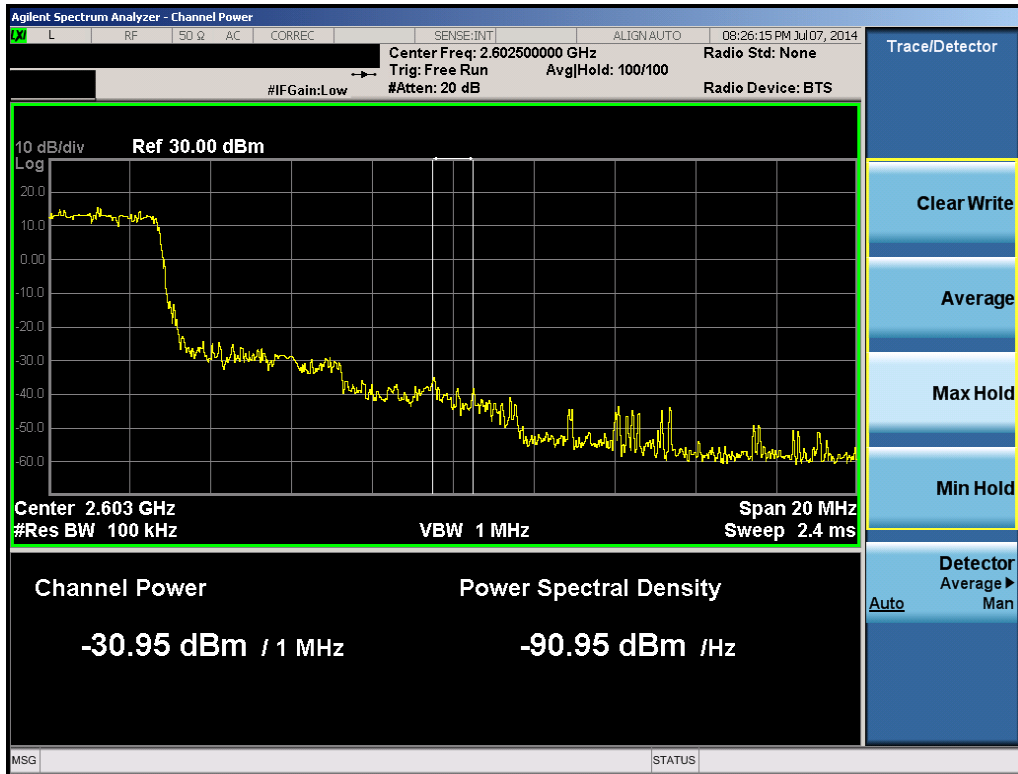


Plot 6-55. 1MHz Integration (Band 41 – 5.0MHz QPSK – RB Size 25, RB Offset 0 – Mid Channel)

FCC ID: A3LSPHL720T		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407011336.	Test Dates: 7/3 - 7/7/2014	EUT Type: Portable Handset		Page 41 of 82

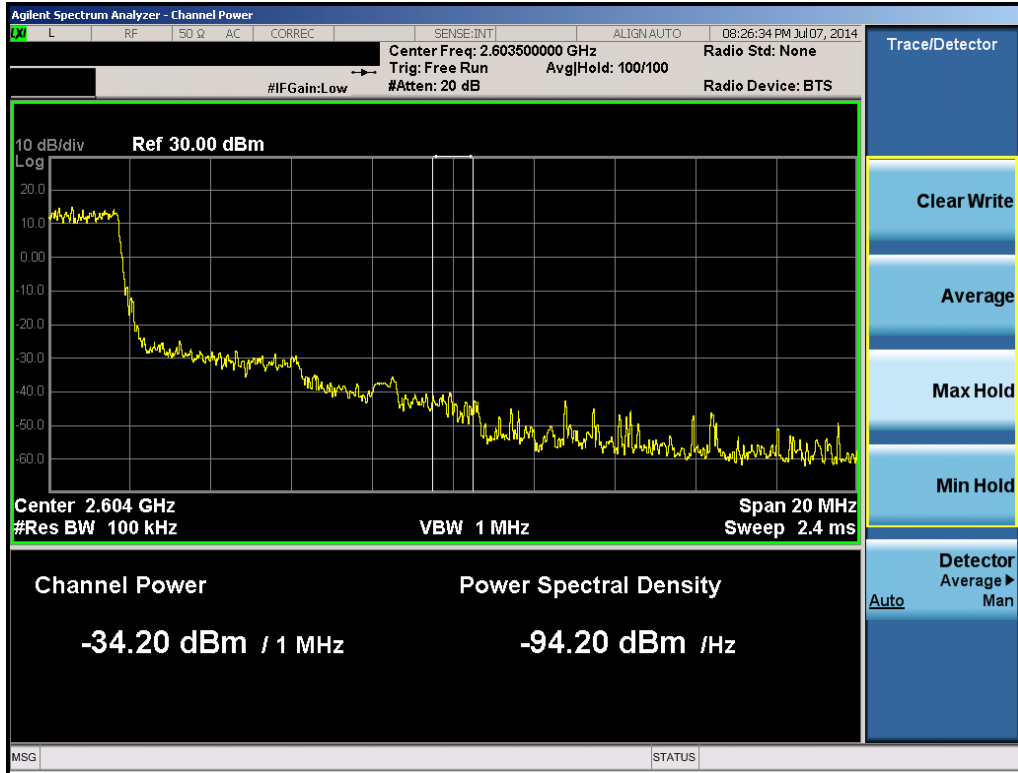


Plot 6-56. 1MHz Integration (Band 41 – 5.0MHz QPSK – RB Size 25, RB Offset 0 – Mid Channel)

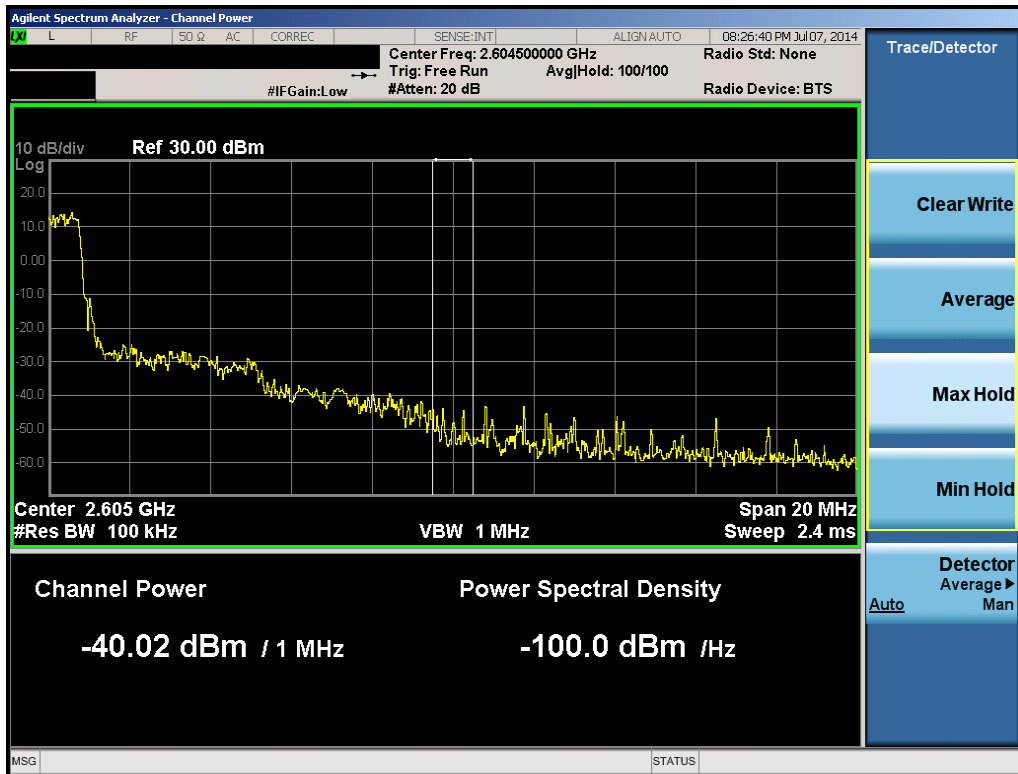


Plot 6-57. 1MHz Integration (Band 41 – 5.0MHz QPSK – RB Size 25, RB Offset 0 – Mid Channel)

FCC ID: A3LSPHL720T		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407011336.	Test Dates: 7/3 - 7/7/2014	EUT Type: Portable Handset		Page 42 of 82

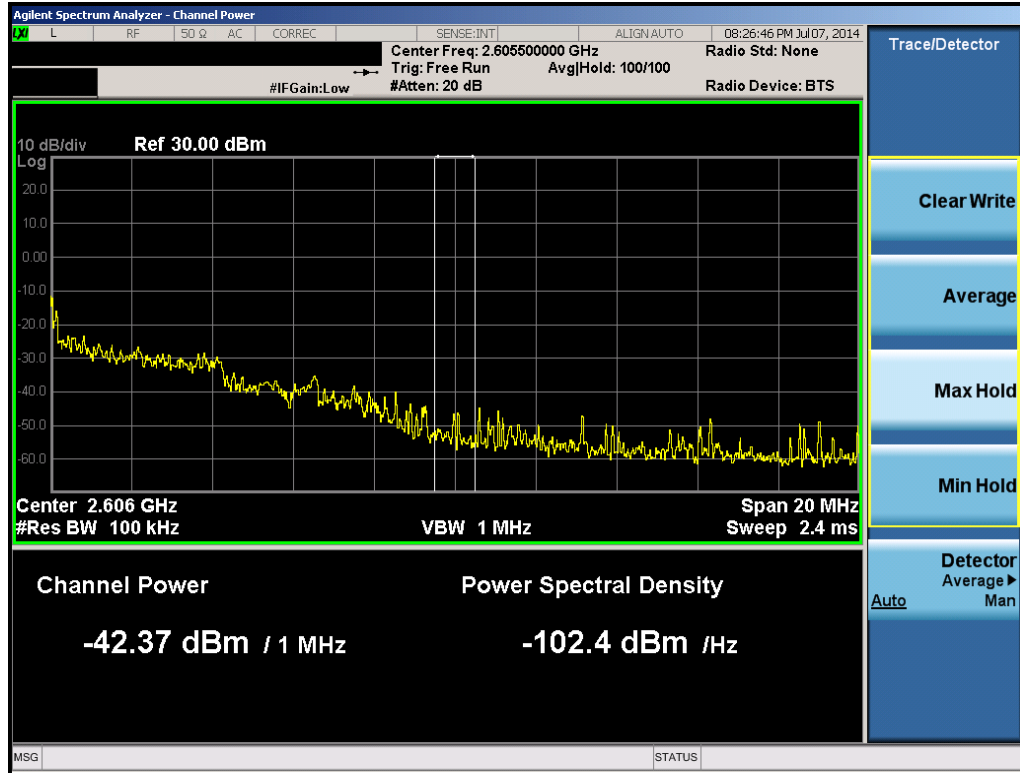


Plot 6-58. 1MHz Integration (Band 41 – 5.0MHz QPSK – RB Size 25, RB Offset 0 – Mid Channel)

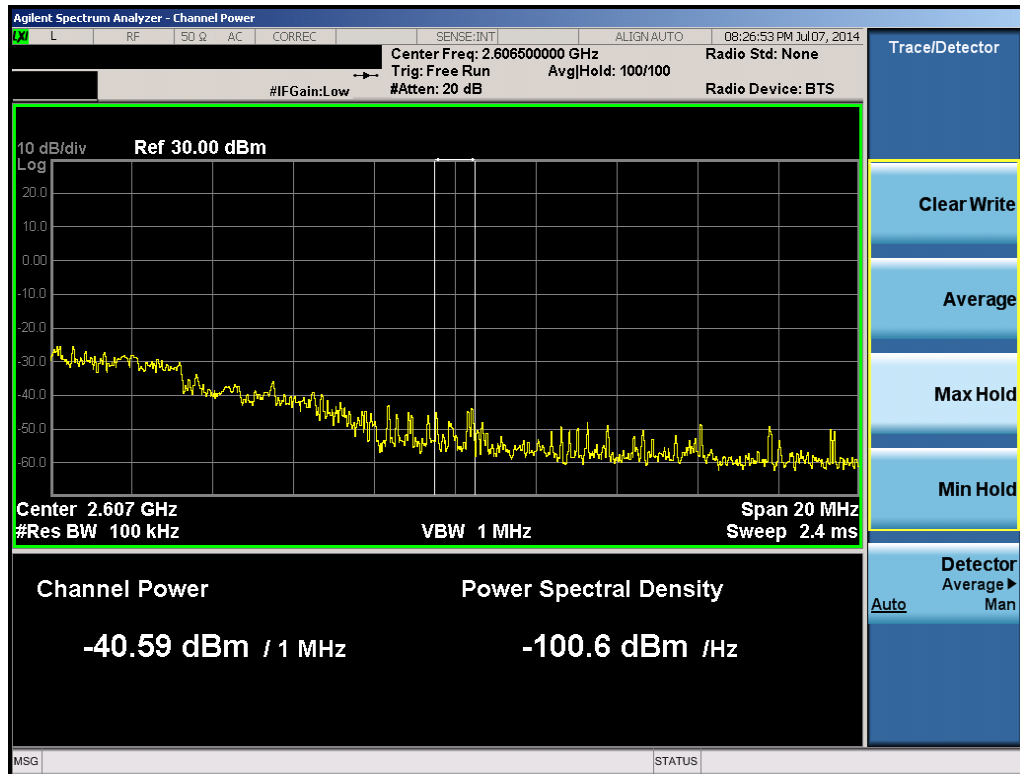


Plot 6-59. 1MHz Integration (Band 41 – 5.0MHz QPSK – RB Size 25, RB Offset 0 – Mid Channel)

FCC ID: A3LSPHL720T		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407011336.	Test Dates: 7/3 - 7/7/2014	EUT Type: Portable Handset		Page 43 of 82

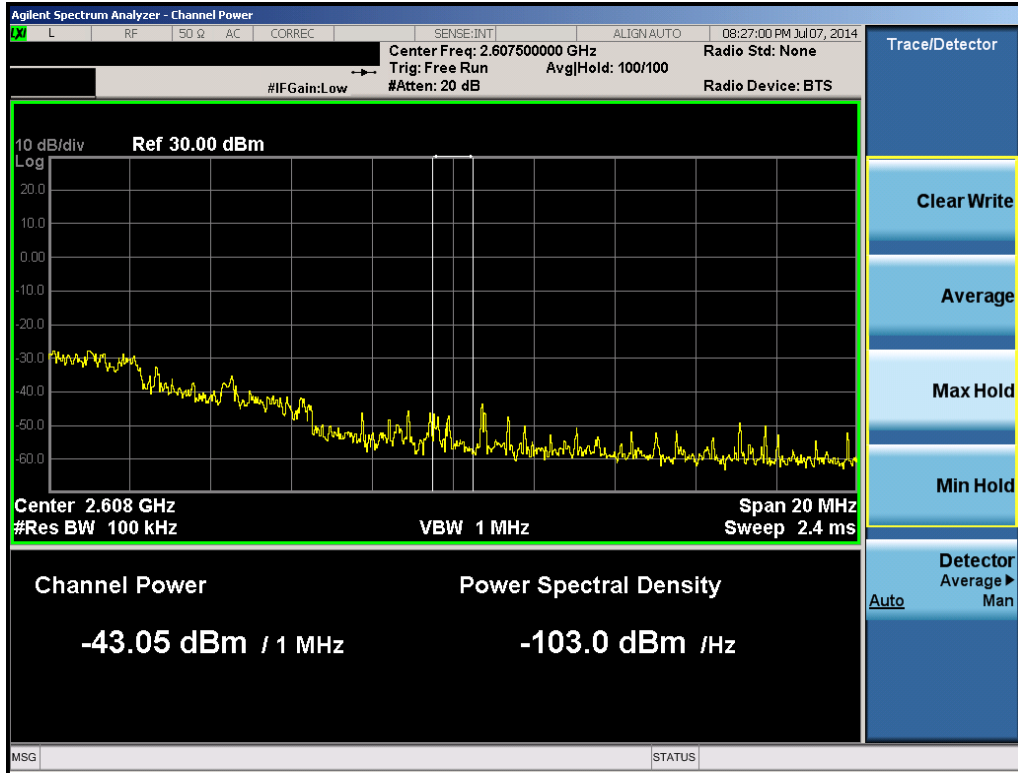


Plot 6-60. 1MHz Integration (Band 41 – 5.0MHz QPSK – RB Size 25, RB Offset 0 – Mid Channel)

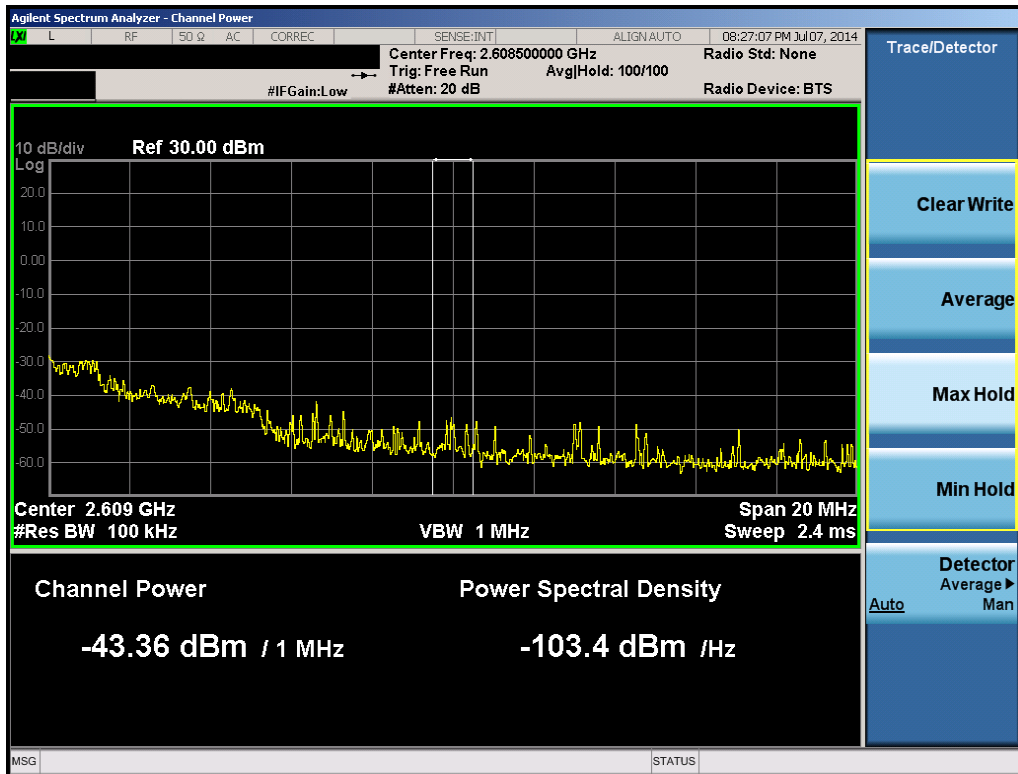


Plot 6-61. 1MHz Integration (Band 41 – 5.0MHz QPSK – RB Size 25, RB Offset 0 – Mid Channel)

FCC ID: A3LSPHL720T		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407011336.	Test Dates: 7/3 - 7/7/2014	EUT Type: Portable Handset		Page 44 of 82

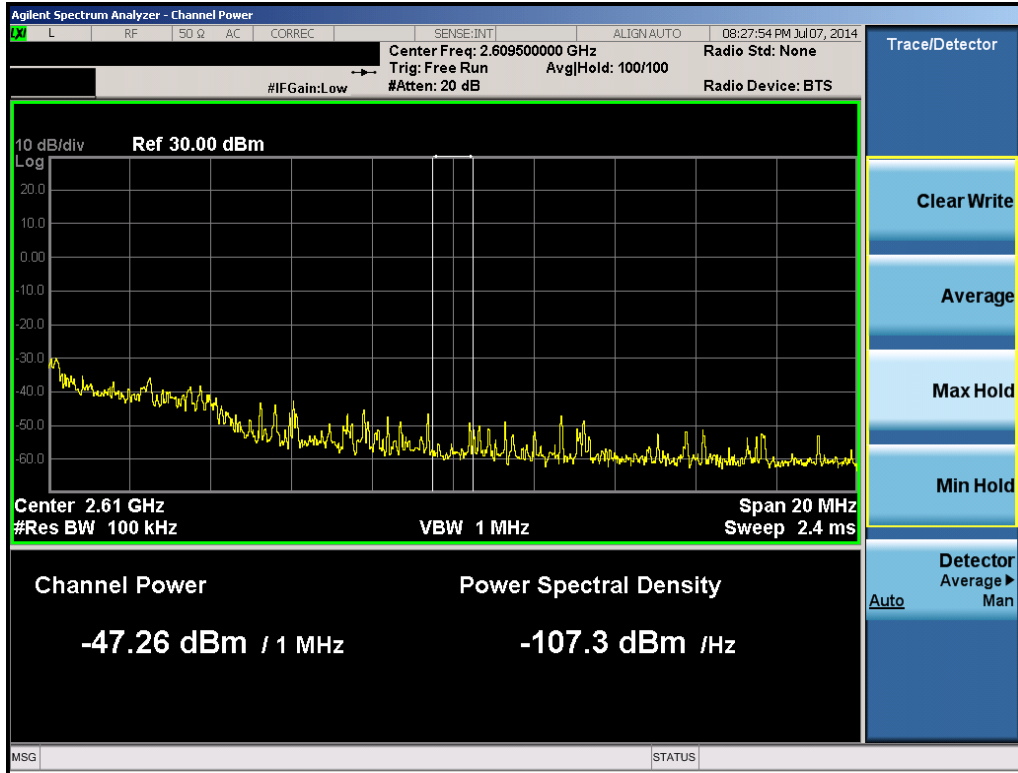


Plot 6-62. 1MHz Integration (Band 41 – 5.0MHz QPSK – RB Size 25, RB Offset 0 – Mid Channel)

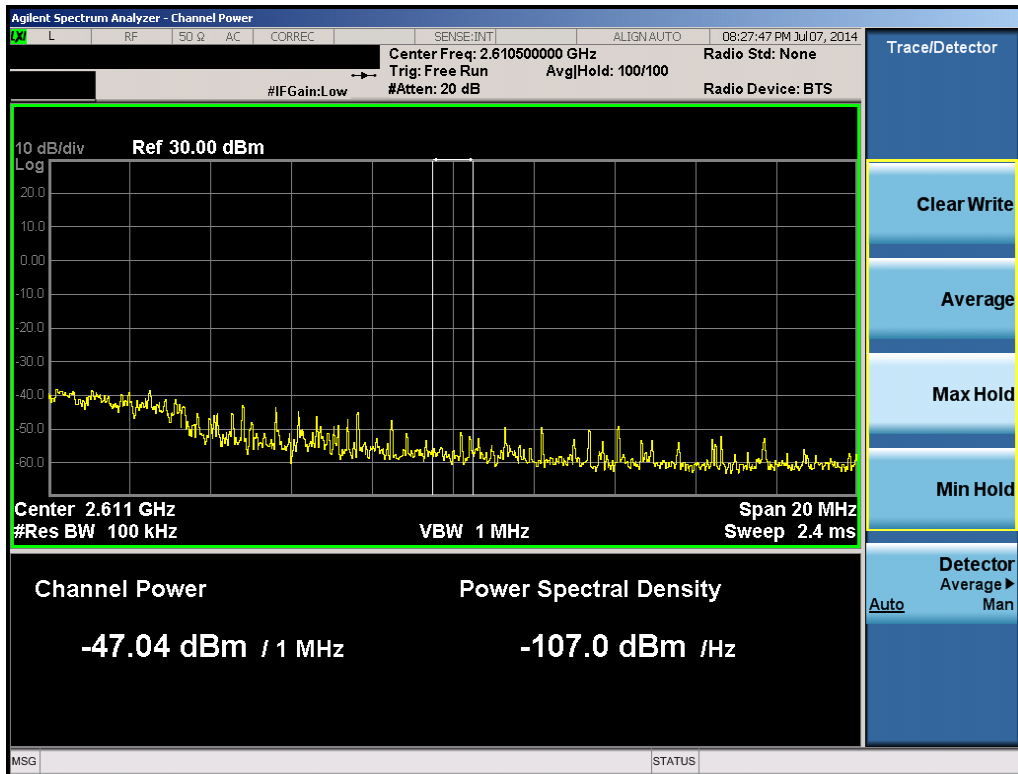


Plot 6-63. 1MHz Integration (Band 41 – 5.0MHz QPSK – RB Size 25, RB Offset 0 – Mid Channel)

FCC ID: A3LSPHL720T		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407011336.	Test Dates: 7/3 - 7/7/2014	EUT Type: Portable Handset		Page 45 of 82

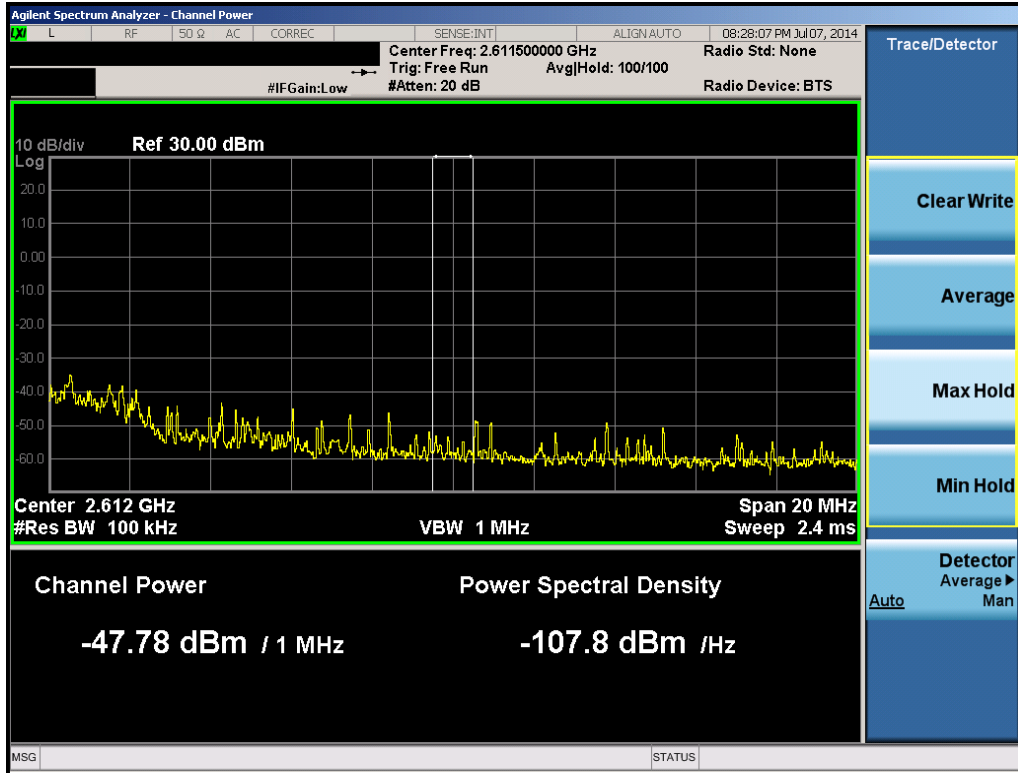


Plot 6-64. 1MHz Integration (Band 41 – 5.0MHz QPSK – RB Size 25, RB Offset 0 – Mid Channel)

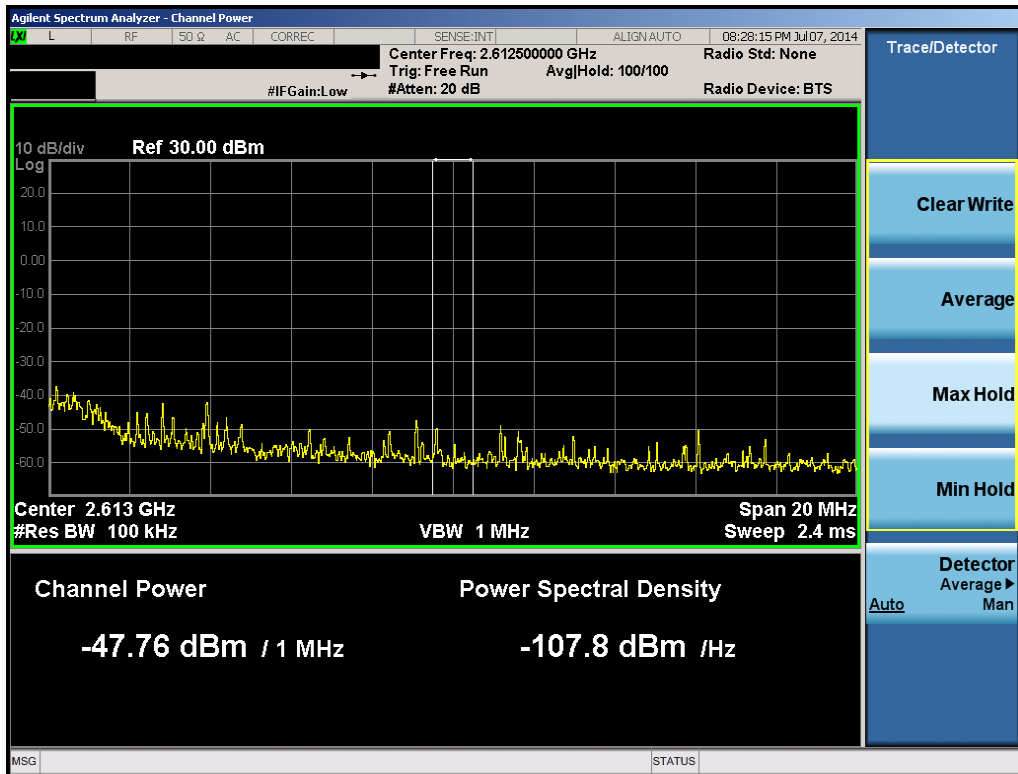


Plot 6-65. 1MHz Integration (Band 41 – 5.0MHz QPSK – RB Size 25, RB Offset 0 – Mid Channel)

FCC ID: A3LSPHL720T		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407011336.	Test Dates: 7/3 - 7/7/2014	EUT Type: Portable Handset		Page 46 of 82

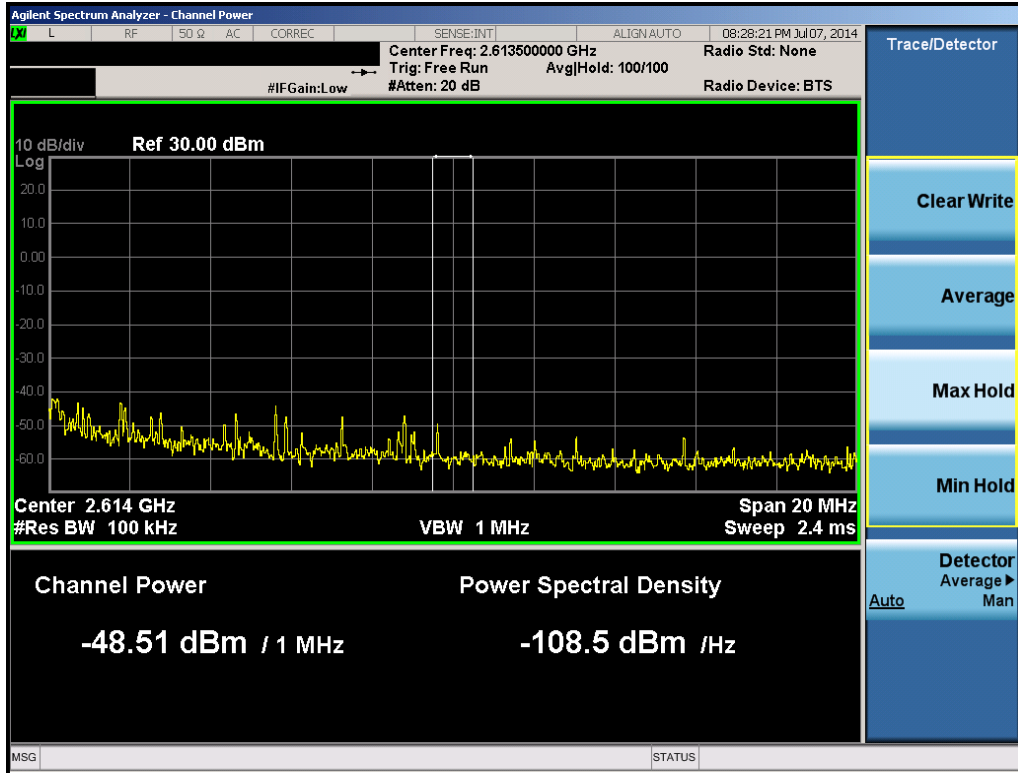


Plot 6-66. 1MHz Integration (Band 41 – 5.0MHz QPSK – RB Size 25, RB Offset 0 – Mid Channel)

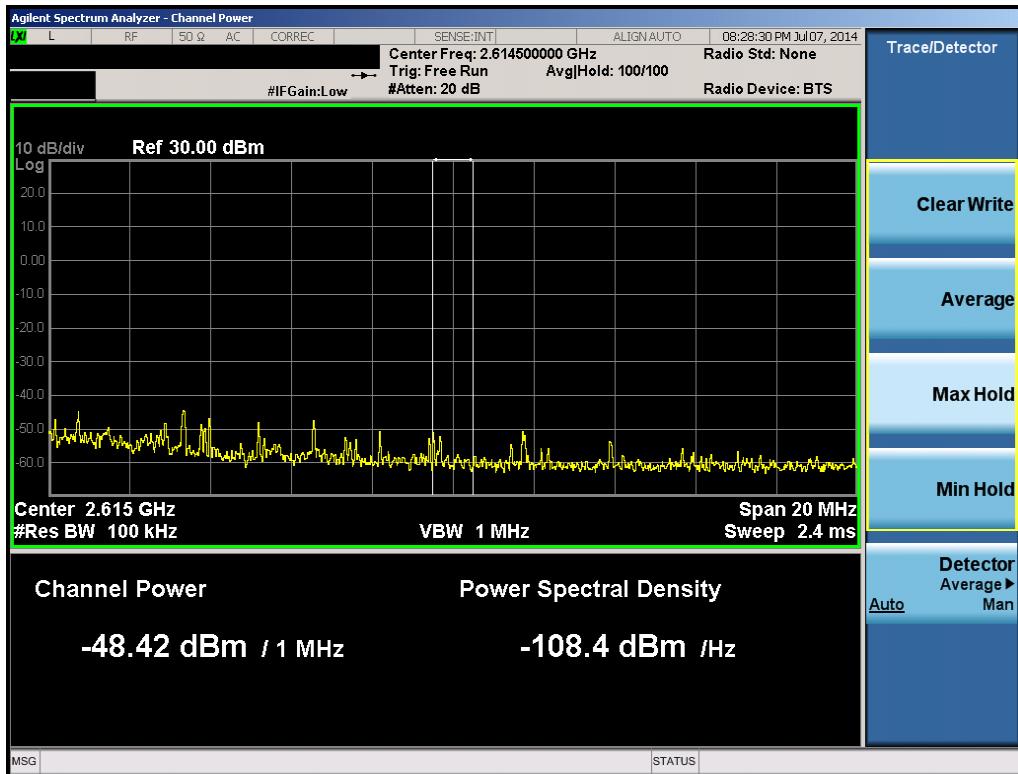


Plot 6-67. 1MHz Integration (Band 41 – 5.0MHz QPSK – RB Size 25, RB Offset 0 – Mid Channel)

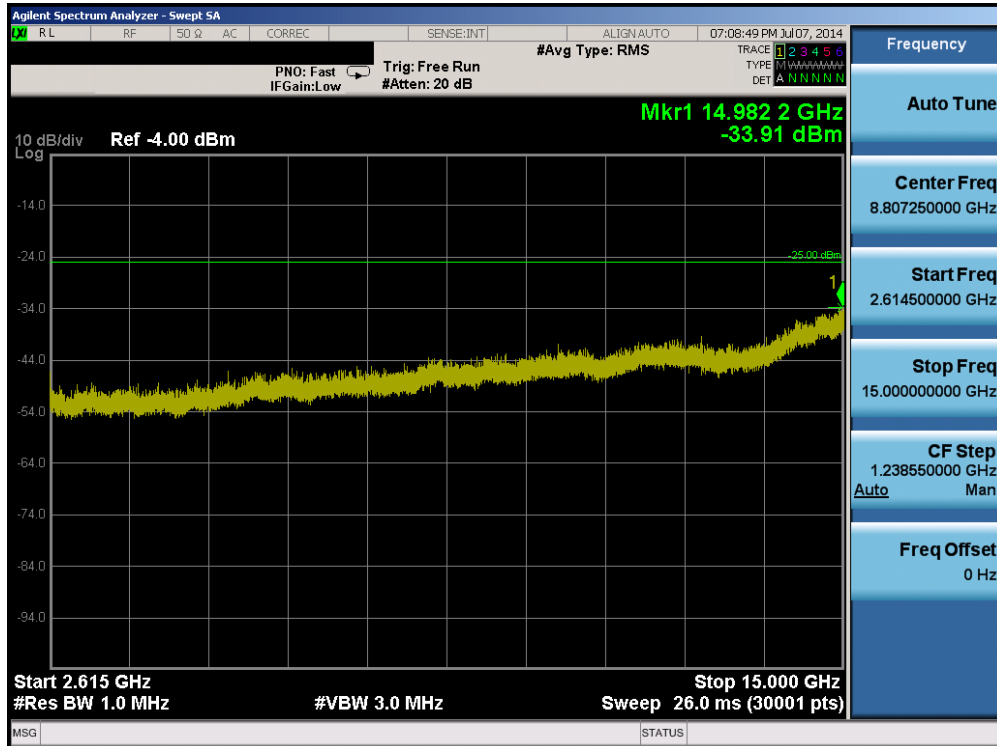

FCC ID: A3LSPHL720T		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407011336.	Test Dates: 7/3 - 7/7/2014	EUT Type: Portable Handset		Page 47 of 82

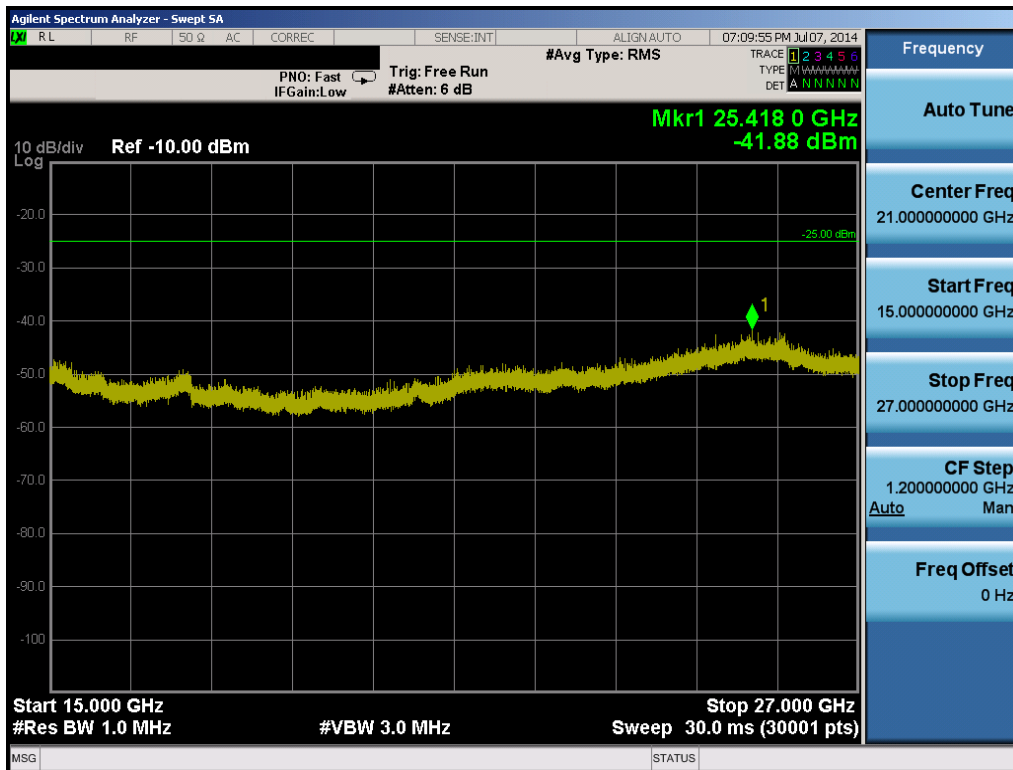


Plot 6-68. Conducted Spurious Plot (Band 41 – 5.0MHz QPSK – RB Size 25, RB Offset 0 – Mid Channel)




Plot 6-69. Conducted Spurious Plot (Band 41 – 5.0MHz QPSK – RB Size 25, RB Offset 0 – Mid Channel)

FCC ID: A3LSPHL720T		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407011336.	Test Dates: 7/3 - 7/7/2014	EUT Type: Portable Handset		Page 48 of 82

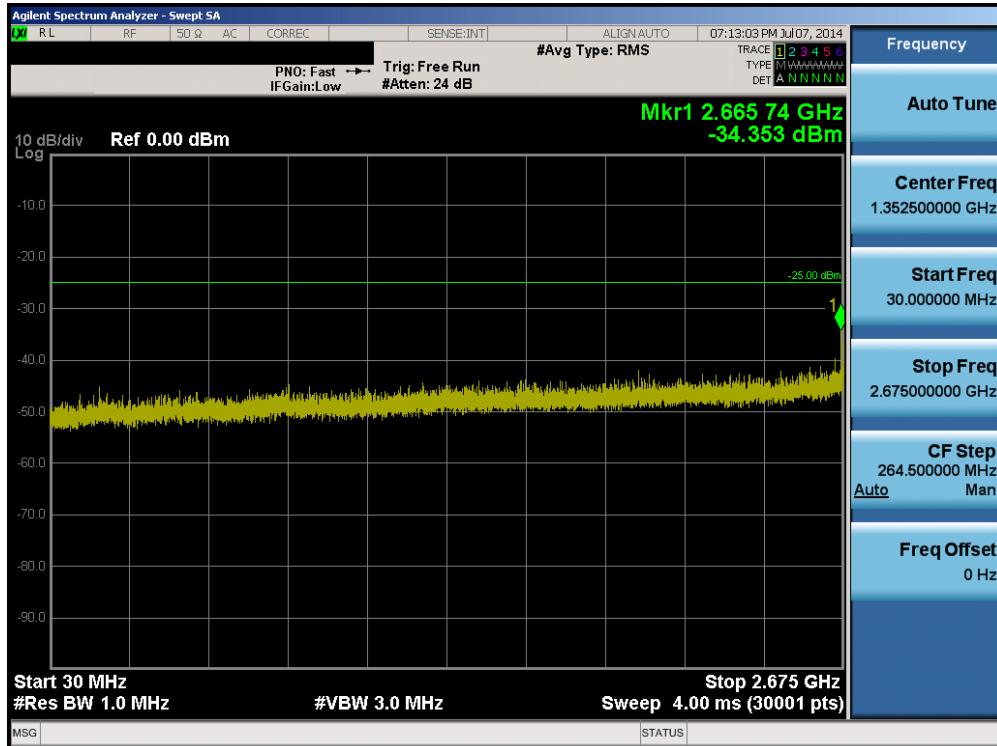


Plot 6-70. Conducted Spurious Plot (Band 41 – 5.0MHz QPSK – RB Size 25, RB Offset 0 – High Channel)

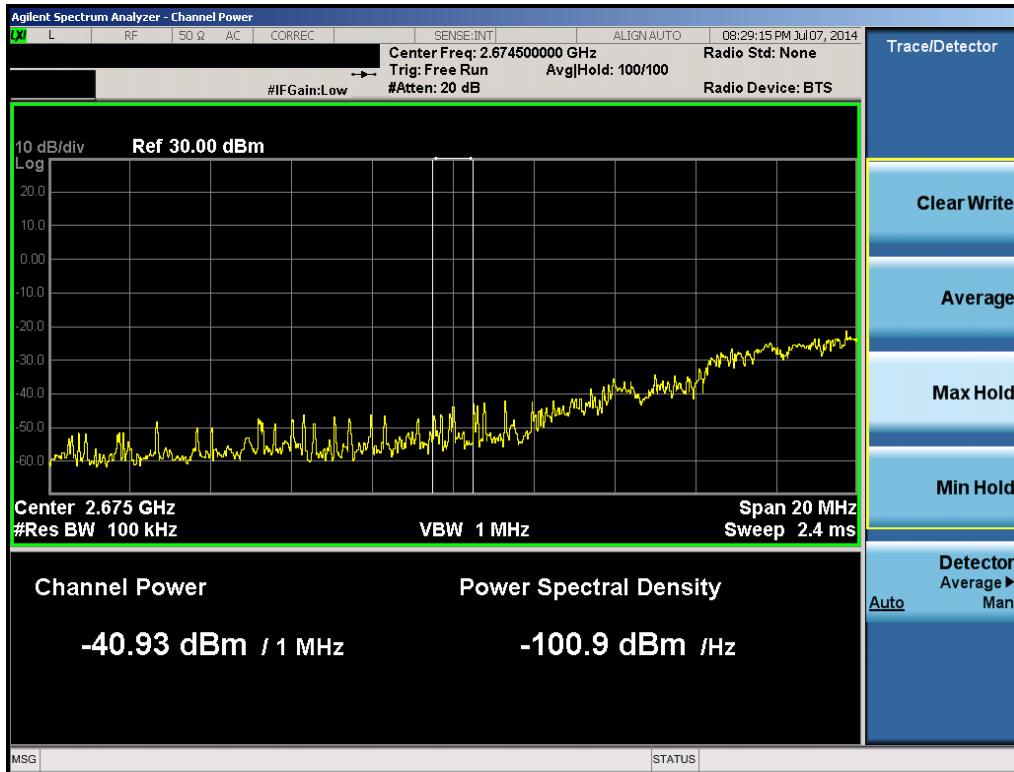


Plot 6-71. 1MHz Integration (Band 41 – 5.0MHz QPSK – RB Size 25, RB Offset 0 – High Channel)

FCC ID: A3LSPHL720T		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407011336.	Test Dates: 7/3 - 7/7/2014	EUT Type: Portable Handset		Page 49 of 82

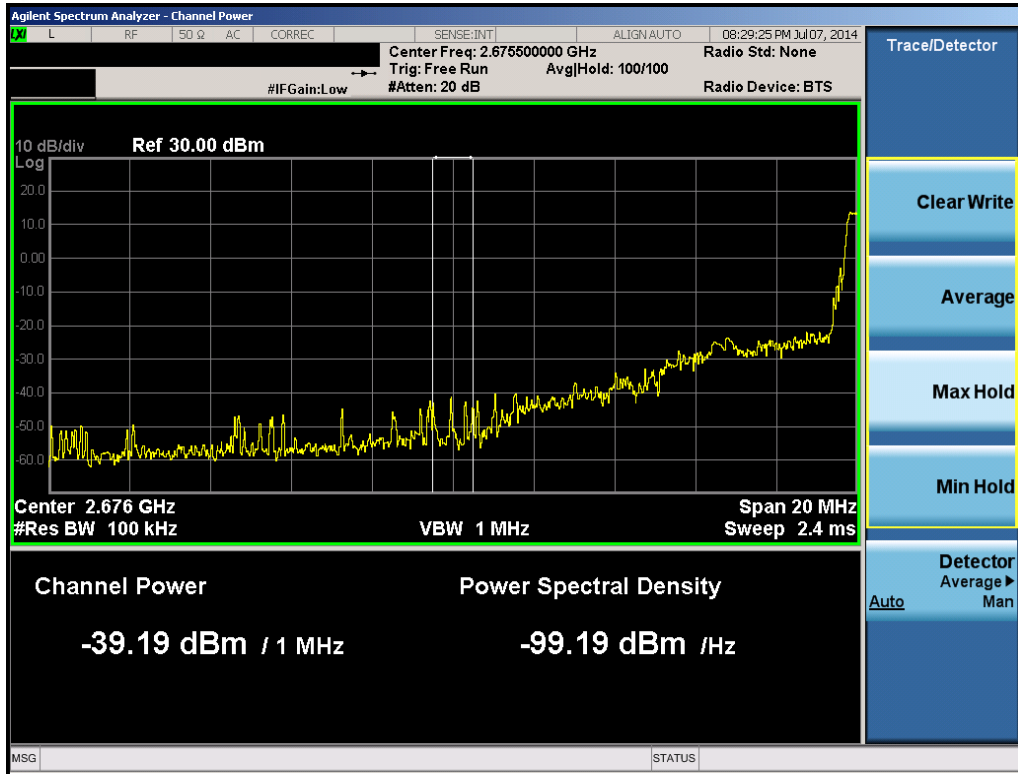


Plot 6-72. 1MHz Integration (Band 41 – 5.0MHz QPSK – RB Size 25, RB Offset 0 – High Channel)

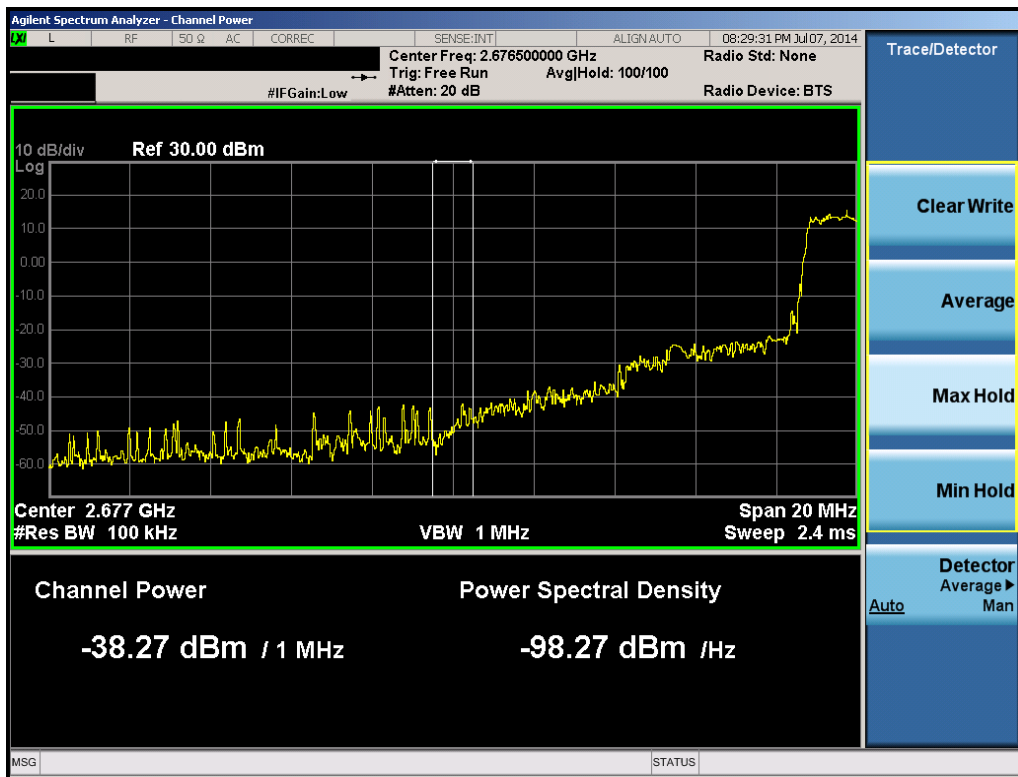


Plot 6-73. 1MHz Integration (Band 41 – 5.0MHz QPSK – RB Size 25, RB Offset 0 – High Channel)

FCC ID: A3LSPHL720T		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407011336.	Test Dates: 7/3 - 7/7/2014	EUT Type: Portable Handset		Page 50 of 82

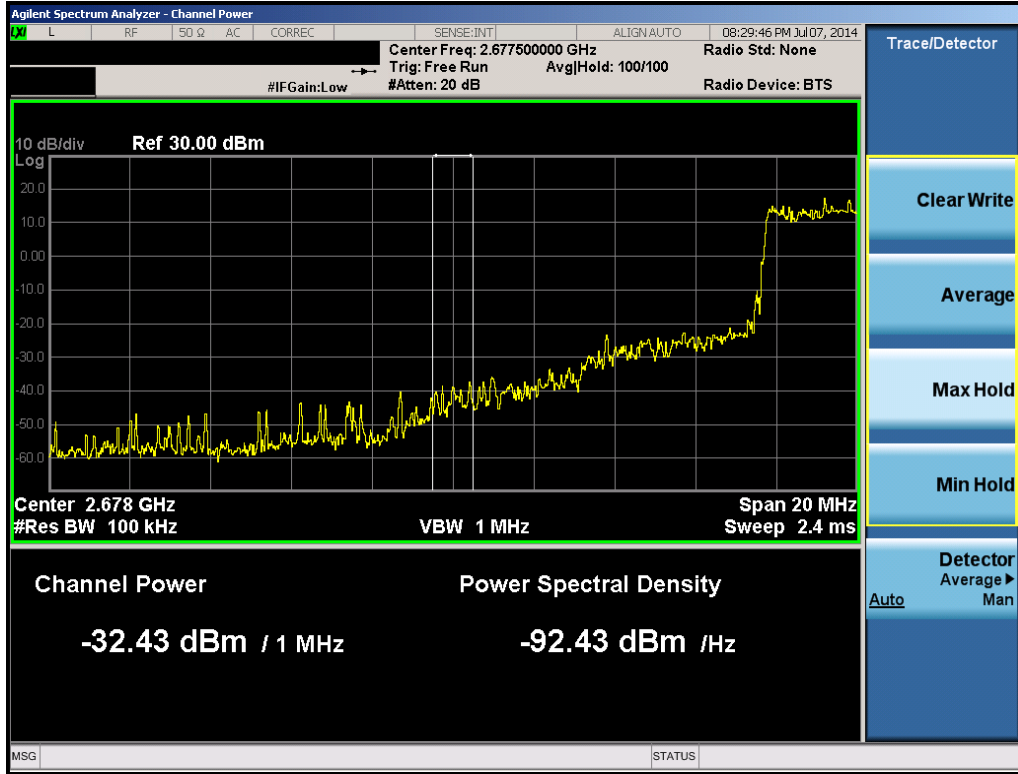


Plot 6-74. 1MHz Integration (Band 41 – 5.0MHz QPSK – RB Size 25, RB Offset 0 – High Channel)

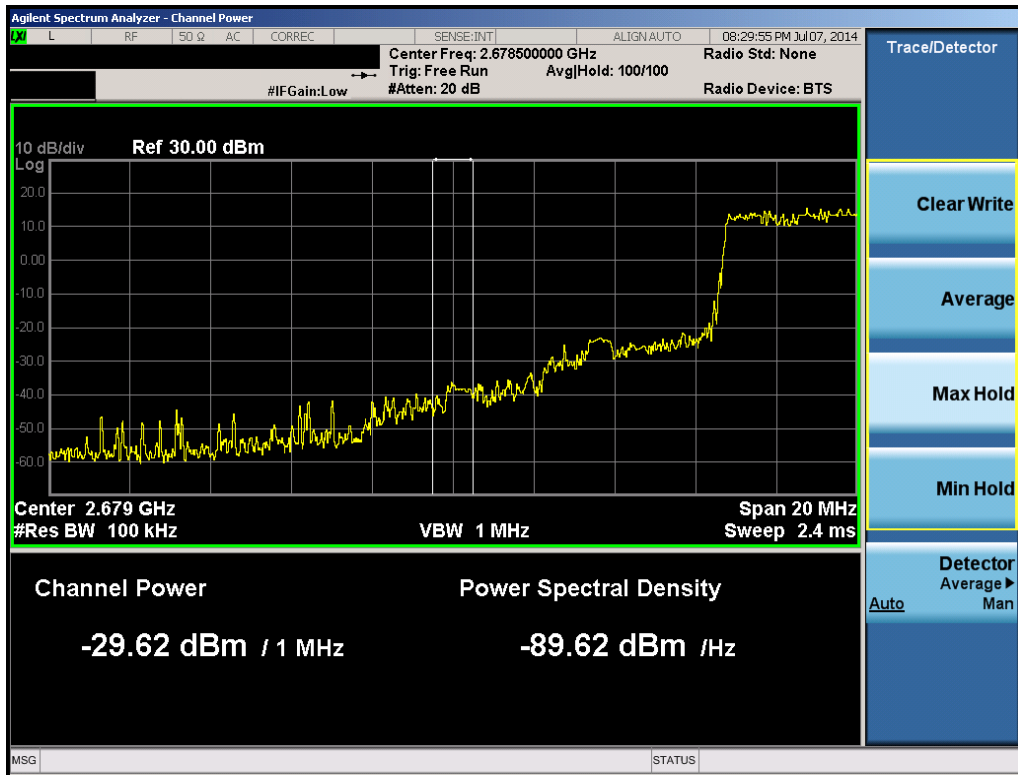


Plot 6-75. 1MHz Integration (Band 41 – 5.0MHz QPSK – RB Size 25, RB Offset 0 – High Channel)

FCC ID: A3LSPHL720T		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407011336.	Test Dates: 7/3 - 7/7/2014	EUT Type: Portable Handset		Page 51 of 82

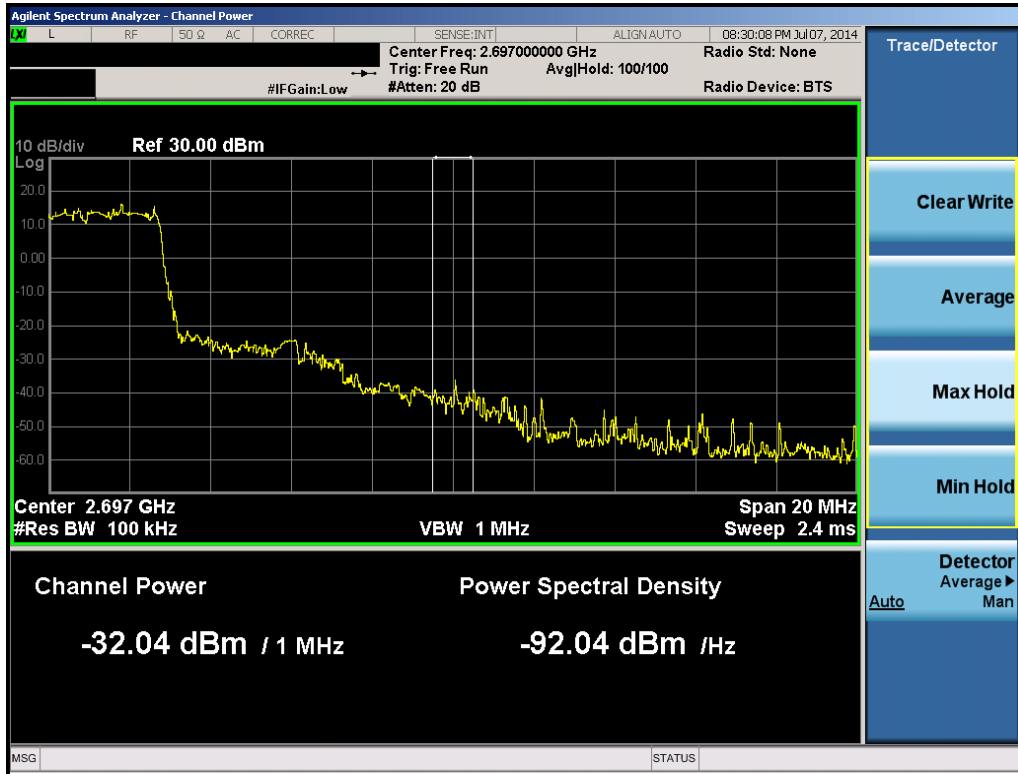


Plot 6-76. 1MHz Integration (Band 41 – 5.0MHz QPSK – RB Size 25, RB Offset 0 – High Channel)

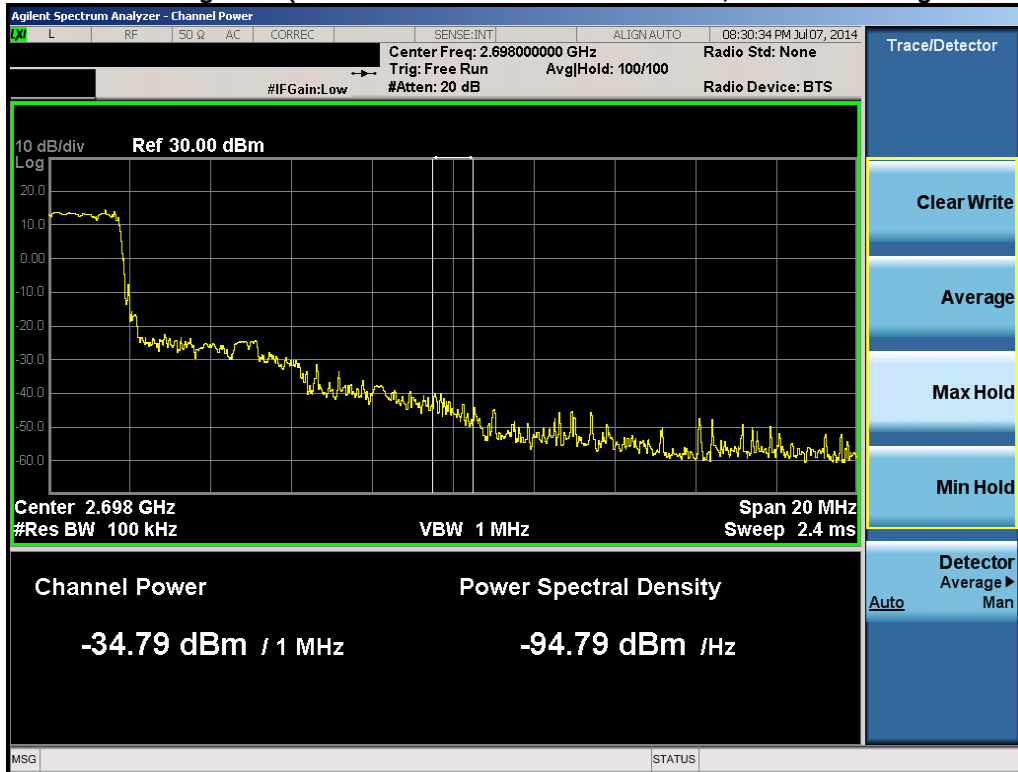


Plot 6-77. 1MHz Integration (Band 41 – 5.0MHz QPSK – RB Size 25, RB Offset 0 – High Channel)

FCC ID: A3LSPHL720T		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407011336.	Test Dates: 7/3 - 7/7/2014	EUT Type: Portable Handset		Page 52 of 82

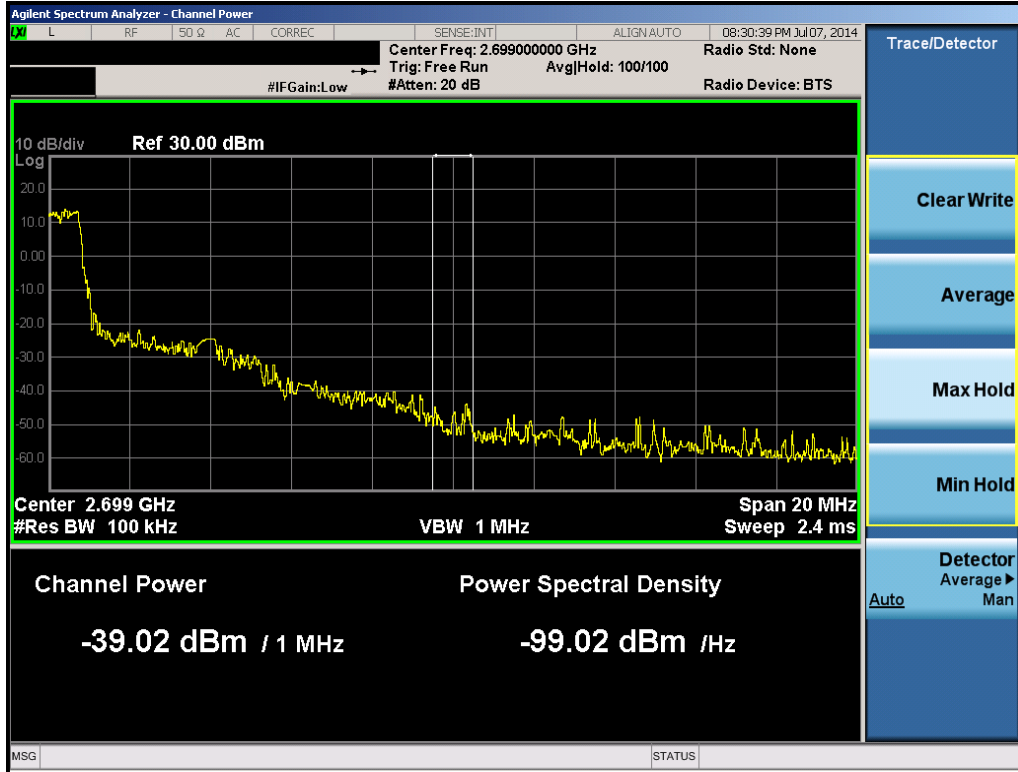


Plot 6-78. 1MHz Integration (Band 41 – 5.0MHz QPSK – RB Size 25, RB Offset 0 – High Channel)

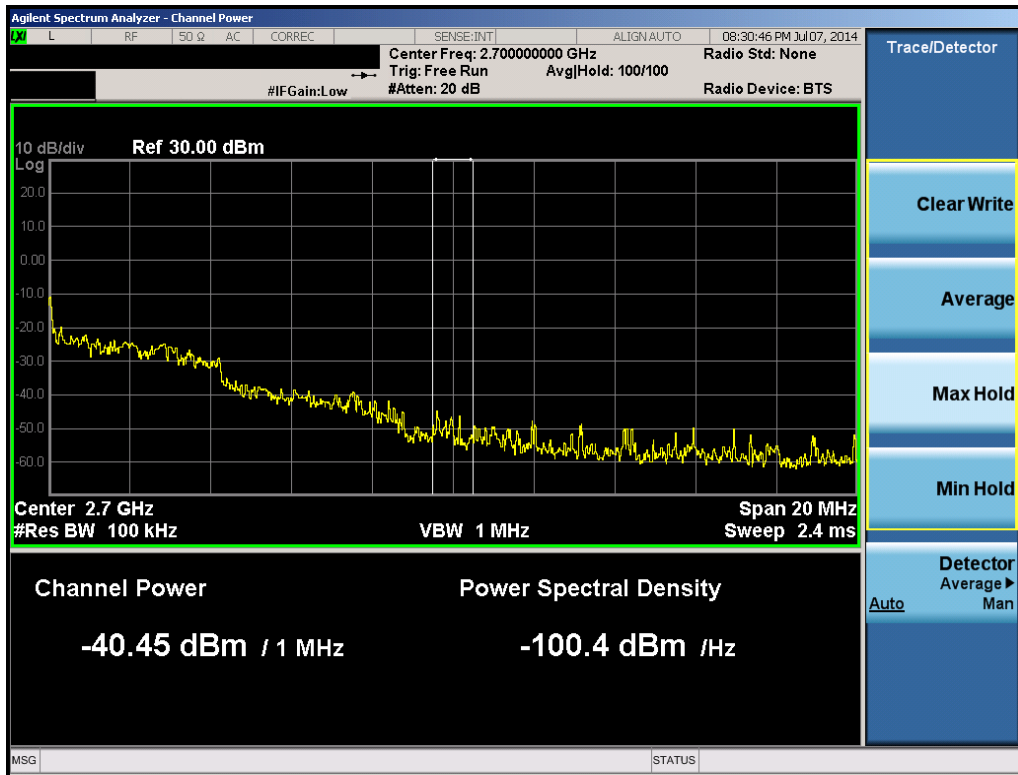


Plot 6-79. 1MHz Integration (Band 41 – 5.0MHz QPSK – RB Size 25, RB Offset 0 – High Channel)

FCC ID: A3LSPHL720T		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407011336.	Test Dates: 7/3 - 7/7/2014	EUT Type: Portable Handset		Page 53 of 82

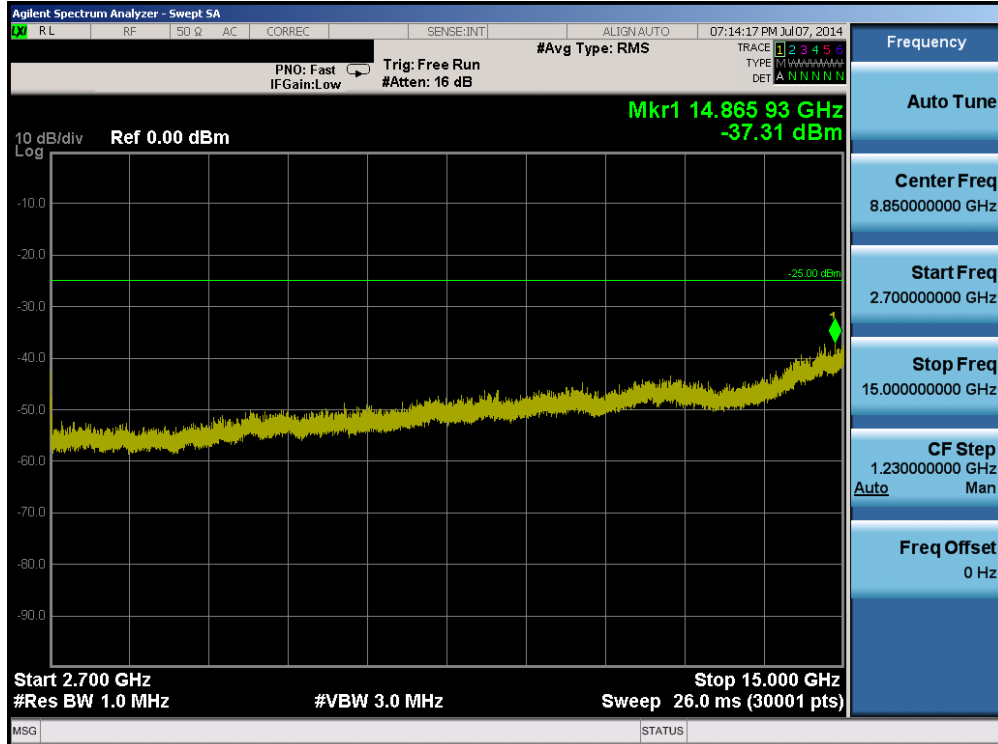

Plot 6-80. Conducted Spurious Plot (Band 41 – 5.0MHz QPSK – RB Size 25, RB Offset 0 – High Channel)

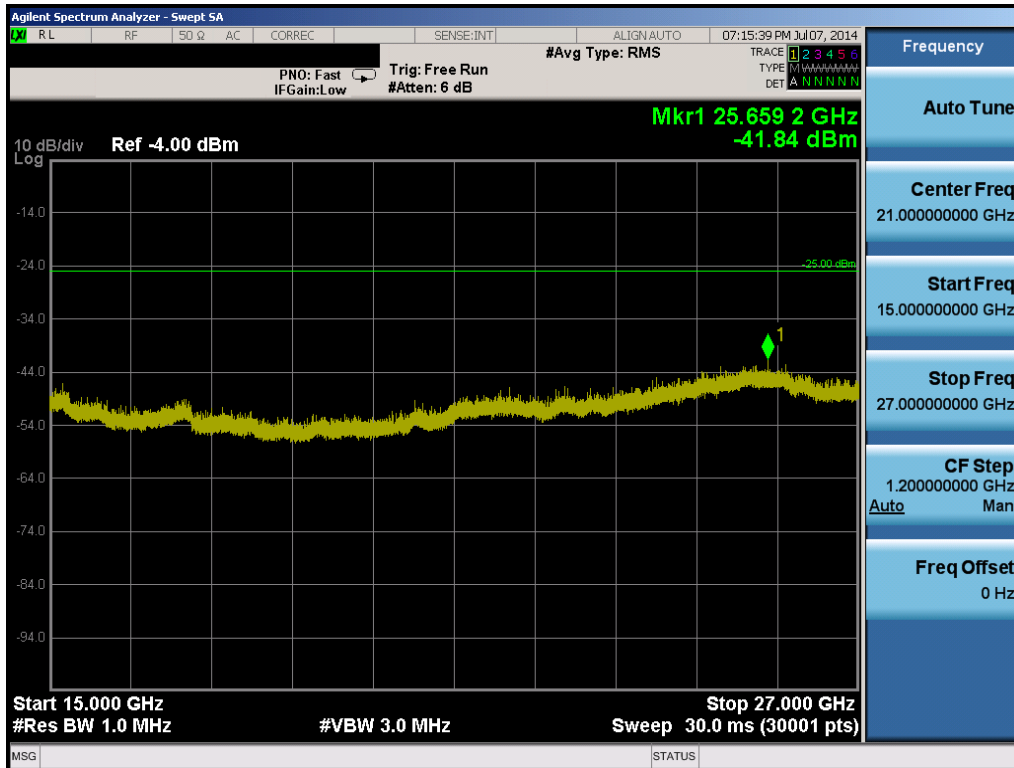

Plot 6-81. Conducted Spurious Plot (Band 41 – 5.0MHz QPSK – RB Size 25, RB Offset 0 – High Channel)

FCC ID: A3LSPHL720T	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1407011336.	Test Dates: 7/3 - 7/7/2014	EUT Type: Portable Handset		Page 54 of 82

## 6.4 Band Edge Emissions at Antenna Terminal

§2.1051 §24.238(a) §27.53(m)

### Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

*The minimum permissible attenuation level of any spurious emission is  $43 + \log_{10}(P_{[Watts]})$ , where  $P$  is the transmitter power in Watts.*

*The minimum permissible attenuation level for Band 41 is  $> 43 + 10\log_{10}(P_{[Watts]})$  at channel edges and  $> 55 + 10\log_{10}(P_{[Watts]})$  at 5.5 MHz away and beyond channel edges.*

### Test Procedure Used


KDB 971168 v02r01 – Section 6.0

### Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW  $\geq$  1% of the emission bandwidth
4. VBW  $\geq$  3 x RBW
5. Detector = RMS
6. Number of sweep points  $\geq$  2 x Span/RBW
7. Trace mode = max hold
8. Sweep time = auto couple
9. The trace was allowed to stabilize

### Test Setup

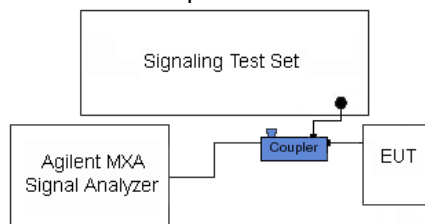

The EUT and measurement equipment were set up as shown in the diagram below.




**Figure 6-3. Test Instrument & Measurement Setup**


### Test Notes

Per 24.238(a) and 27.53(m) in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to demonstrate compliance with the out-of-band emissions limit. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

FCC ID: A3LSPHL720T		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407011336.	Test Dates: 7/3 - 7/7/2014	EUT Type: Portable Handset		Page 55 of 82

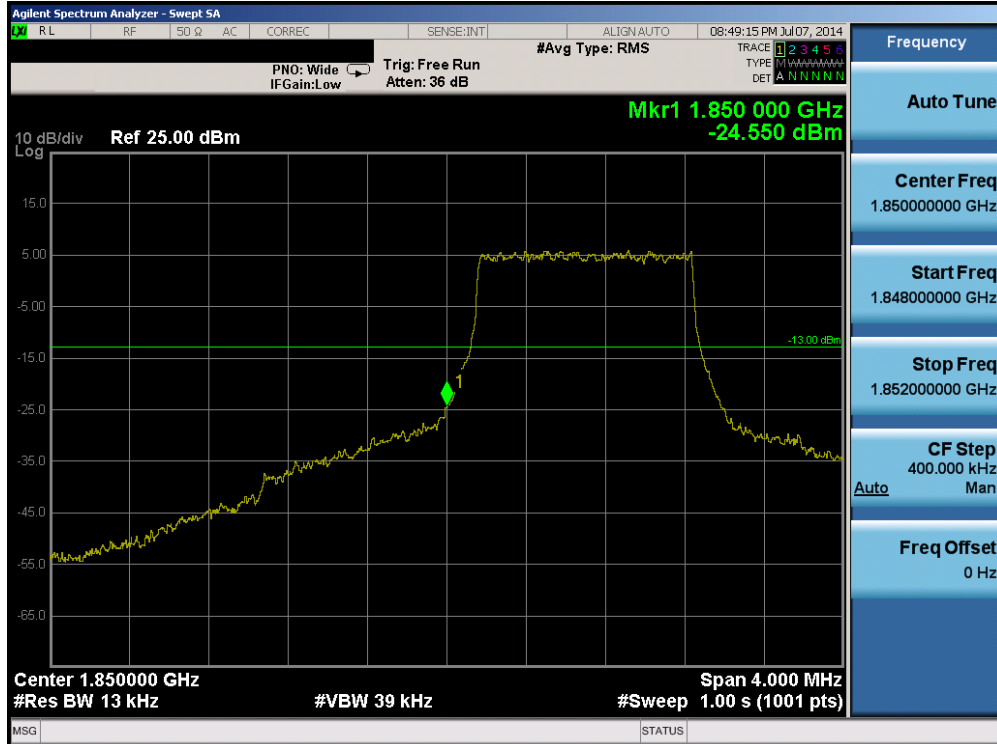

Plot 6-82. Lower Band Edge Plot (Band 25 – 1.4MHz QPSK – RB Size 6)

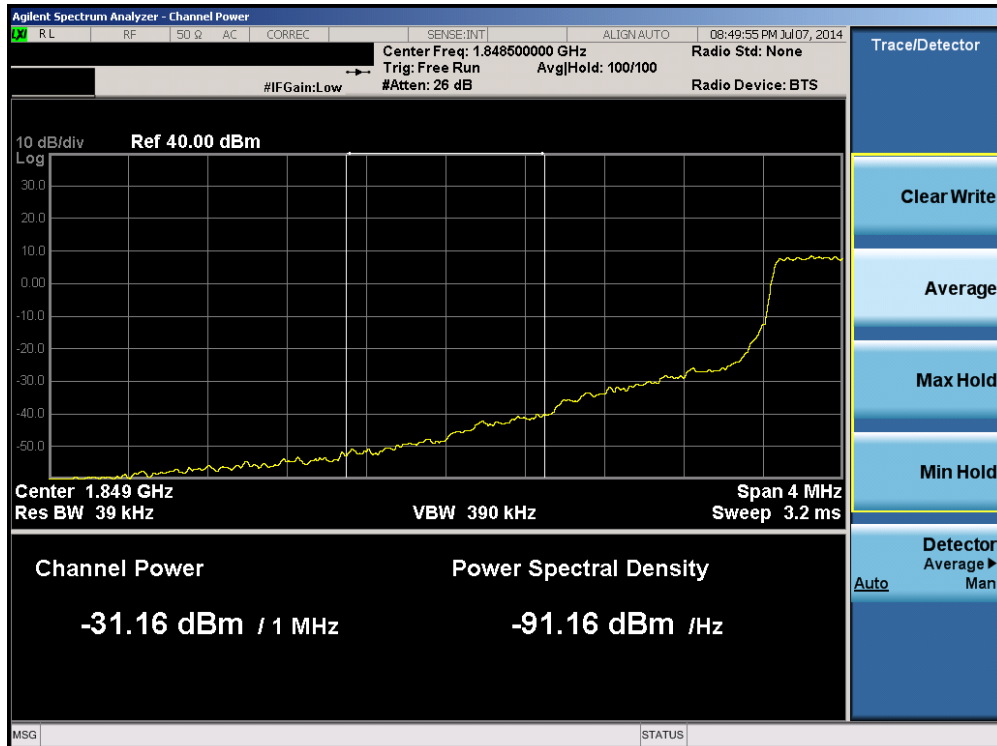

Plot 6-83. Lower Extended Band Edge Plot (Band 25 – 1.4MHz QPSK – RB Size 6)

FCC ID: A3LSPHL720T	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	<b>SAMSUNG</b>	Reviewed by: Quality Manager
Test Report S/N: 0Y1407011336.	Test Dates: 7/3 - 7/7/2014	EUT Type: Portable Handset		Page 56 of 82




Plot 6-84. Upper Band Edge Plot (Band 25 – 1.4MHz QPSK – RB Size 6)




Plot 6-85. Upper Extended Band Edge Plot (Band 25 – 1.4MHz QPSK – RB Size 6)

FCC ID: A3LSPHL720T	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1407011336.	Test Dates: 7/3 - 7/7/2014	EUT Type: Portable Handset		Page 57 of 82

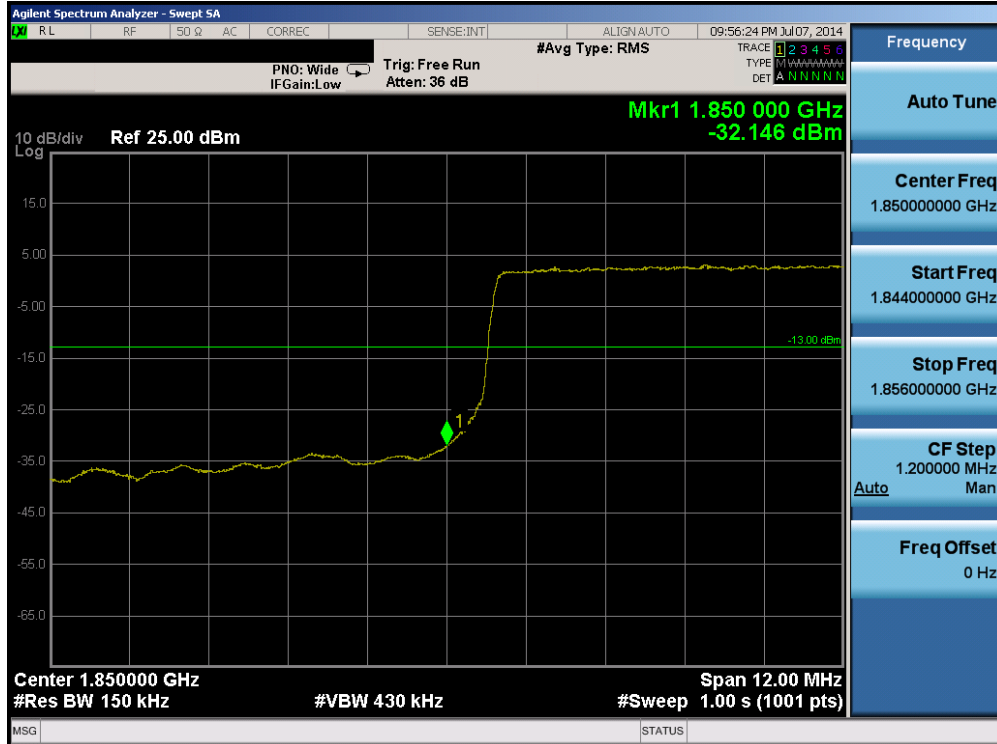


Plot 6-86. Lower Band Edge Plot (Band 25 – 15.0MHz QPSK – RB Size 75)

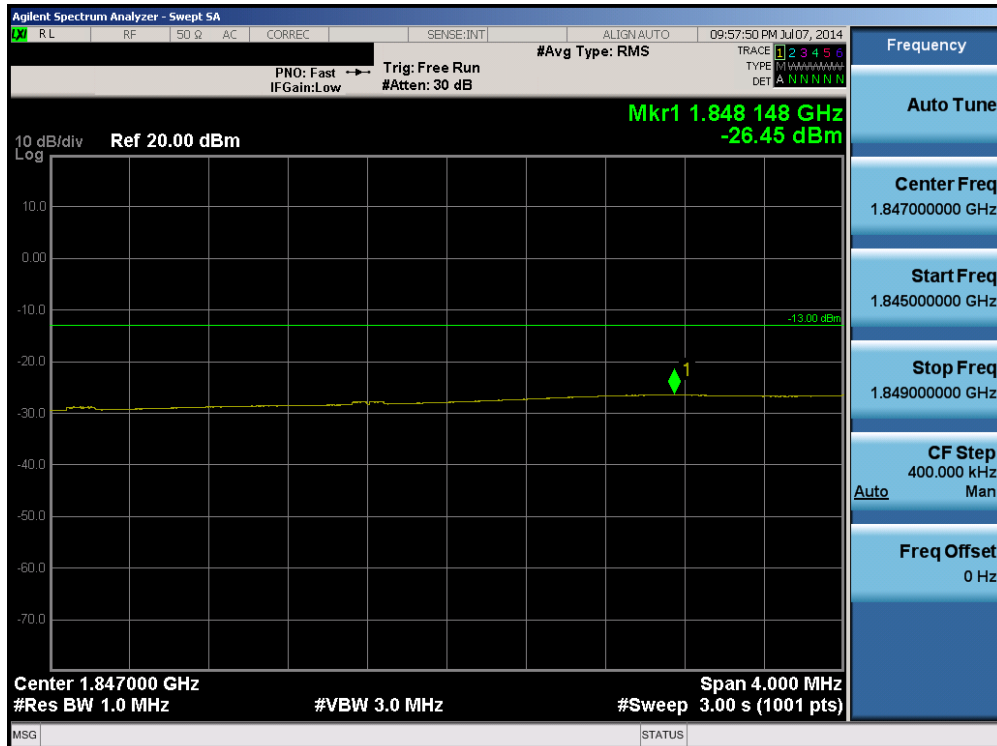


Plot 6-87. Lower Extended Band Edge Plot (Band 25 – 15.0MHz QPSK – RB Size 75)

FCC ID: A3LSPHL720T		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407011336.	Test Dates: 7/3 - 7/7/2014	EUT Type: Portable Handset		Page 58 of 82

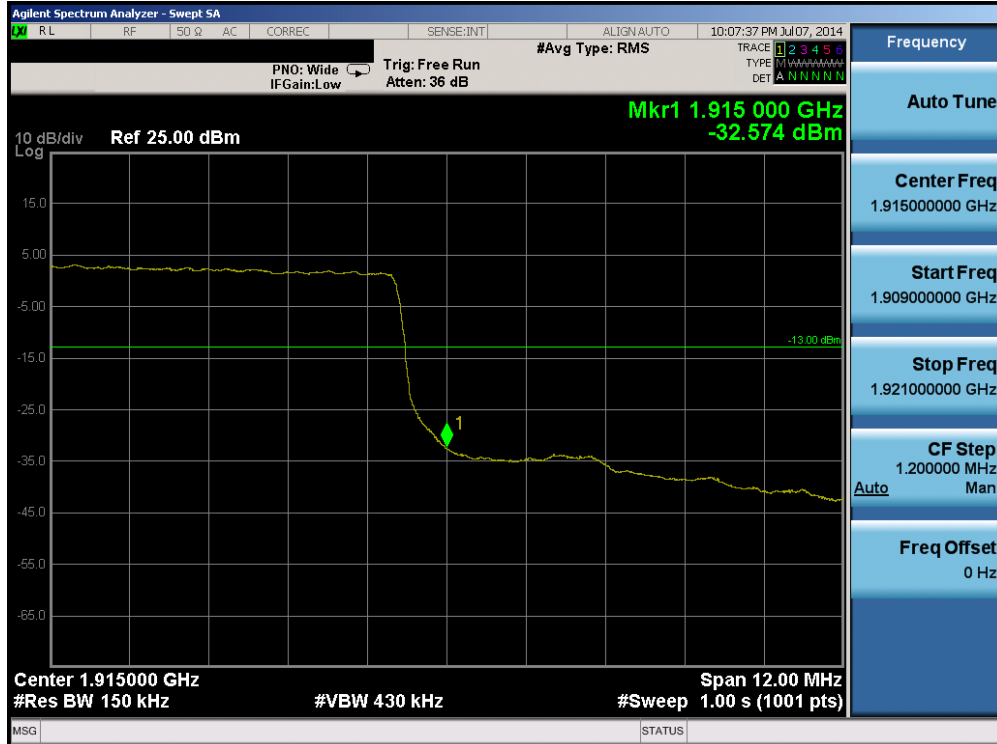


Plot 6-88. Upper Band Edge Plot (Band 25 – 15.0MHz QPSK – RB Size 75)

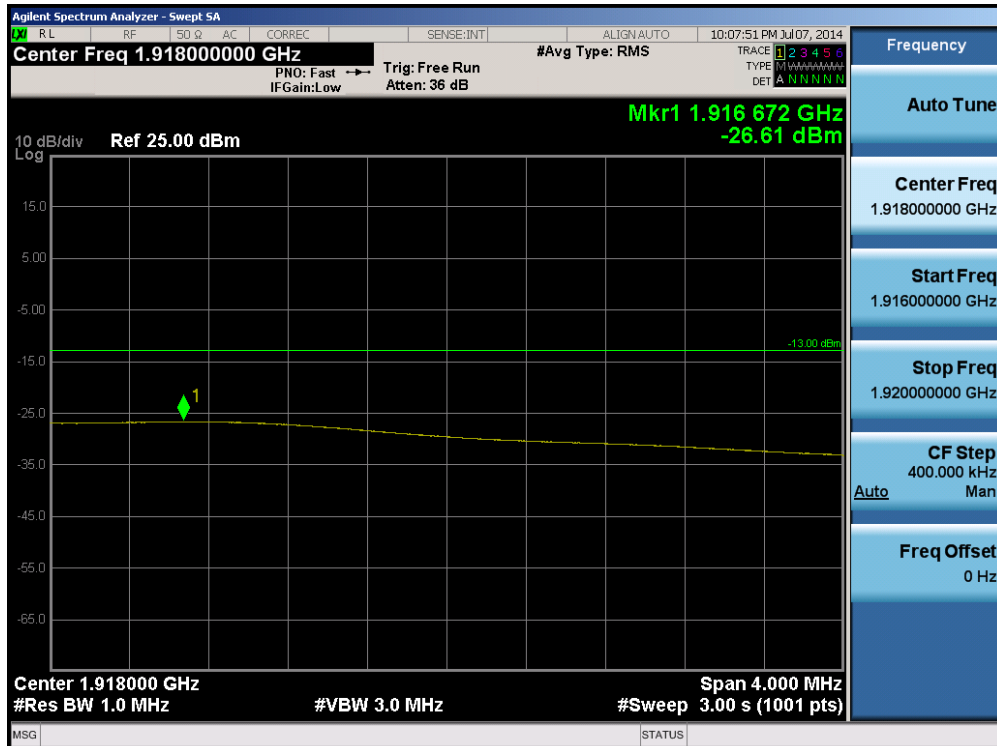


Plot 6-89. Upper Extended Band Edge Plot (Band 25 – 15.0MHz QPSK – RB Size 75)

FCC ID: A3LSPHL720T	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1407011336.	Test Dates: 7/3 - 7/7/2014	EUT Type: Portable Handset		Page 59 of 82

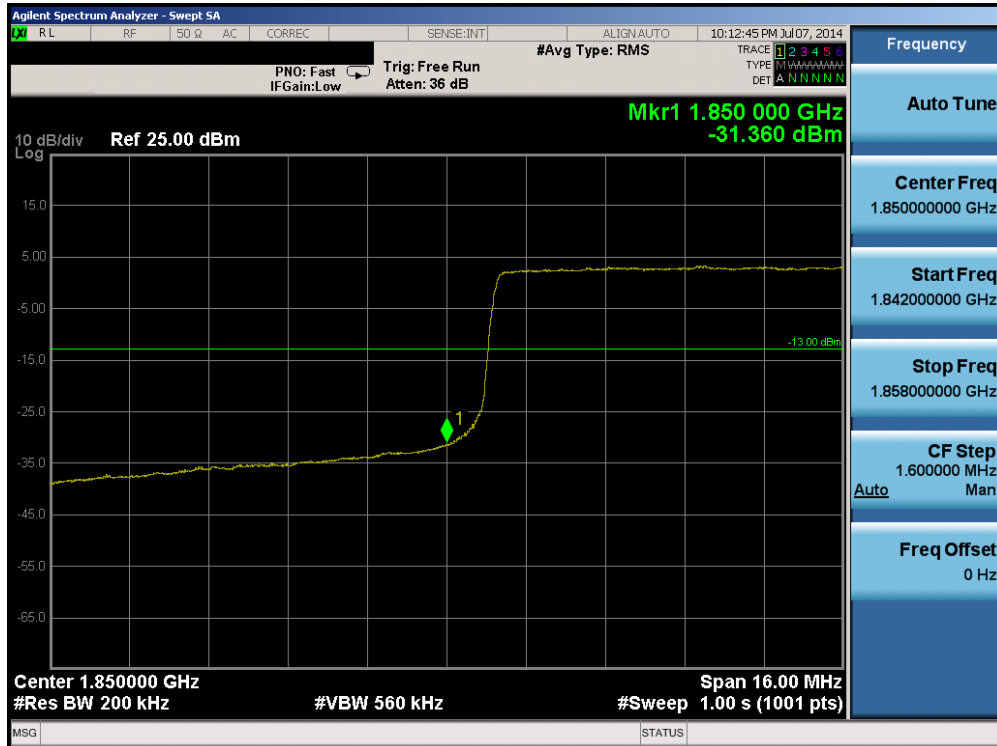


Plot 6-90. Lower Band Edge Plot (Band 25 – 20.0MHz QPSK – RB Size 100)

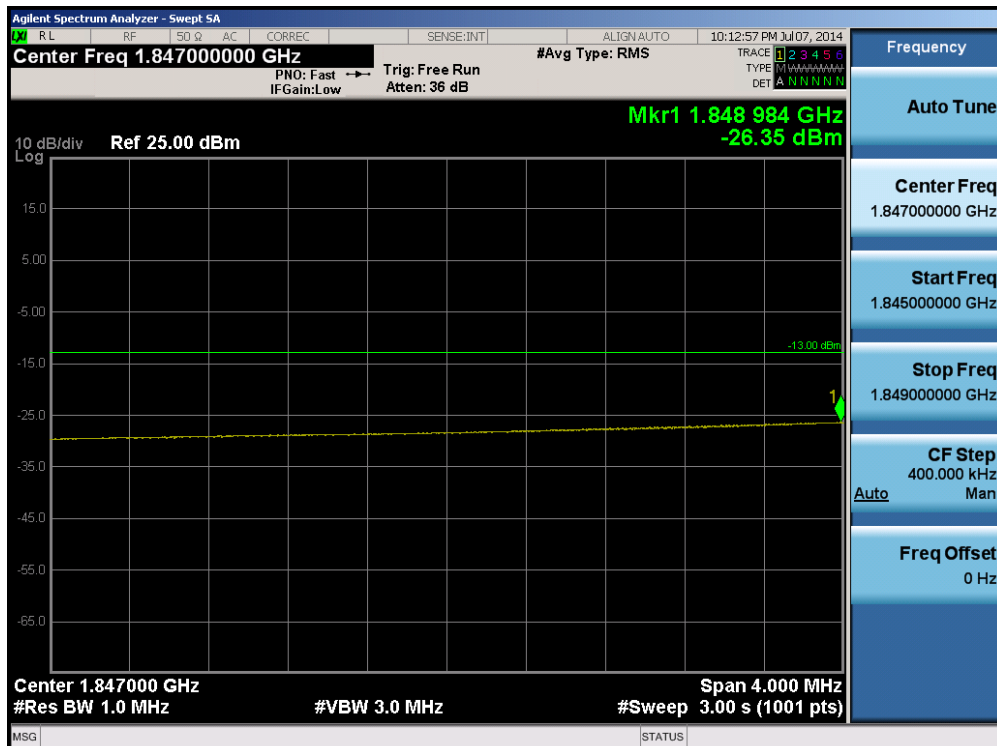


Plot 6-91. Lower Extended Band Edge Plot (Band 25 – 20.0MHz QPSK – RB Size 100)

FCC ID: A3LSPHL720T		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407011336.	Test Dates: 7/3 - 7/7/2014	EUT Type: Portable Handset		Page 60 of 82



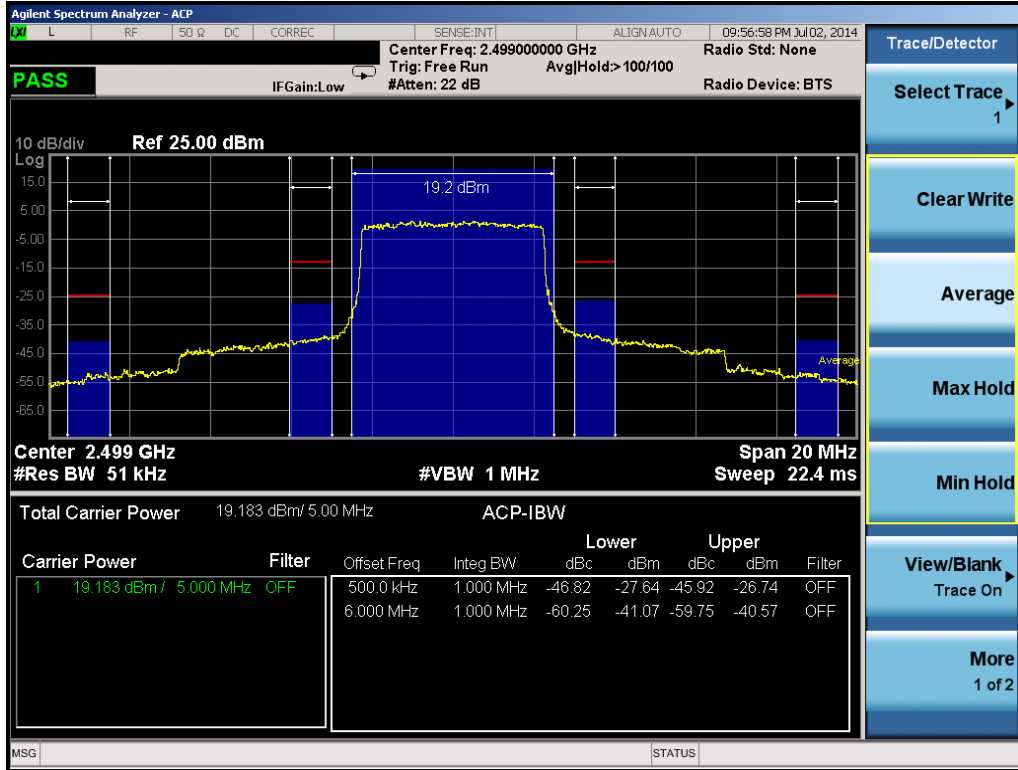


Plot 6-94. Lower ACP Plot (Band 41 – 5.0MHz QPSK – RB Size 25)

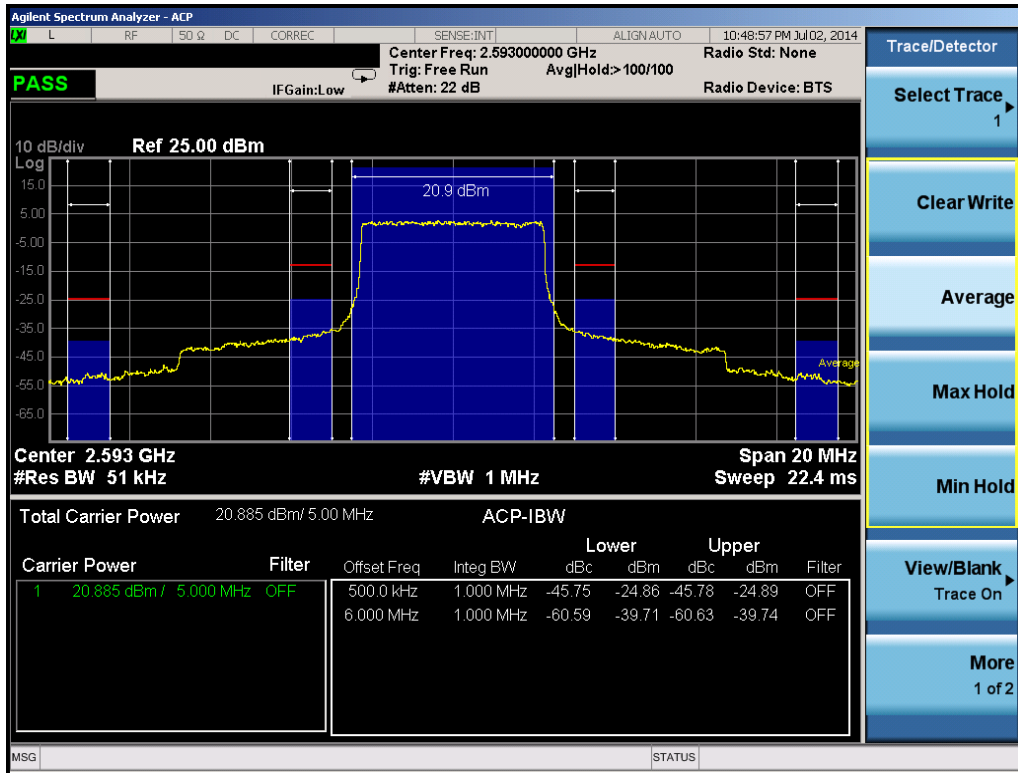

Plot 6-95. Mid ACP Plot (Band 41 – 5.0MHz QPSK – RB Size 25)

FCC ID: A3LSPHL720T		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407011336.	Test Dates: 7/3 - 7/7/2014	EUT Type: Portable Handset		Page 62 of 82

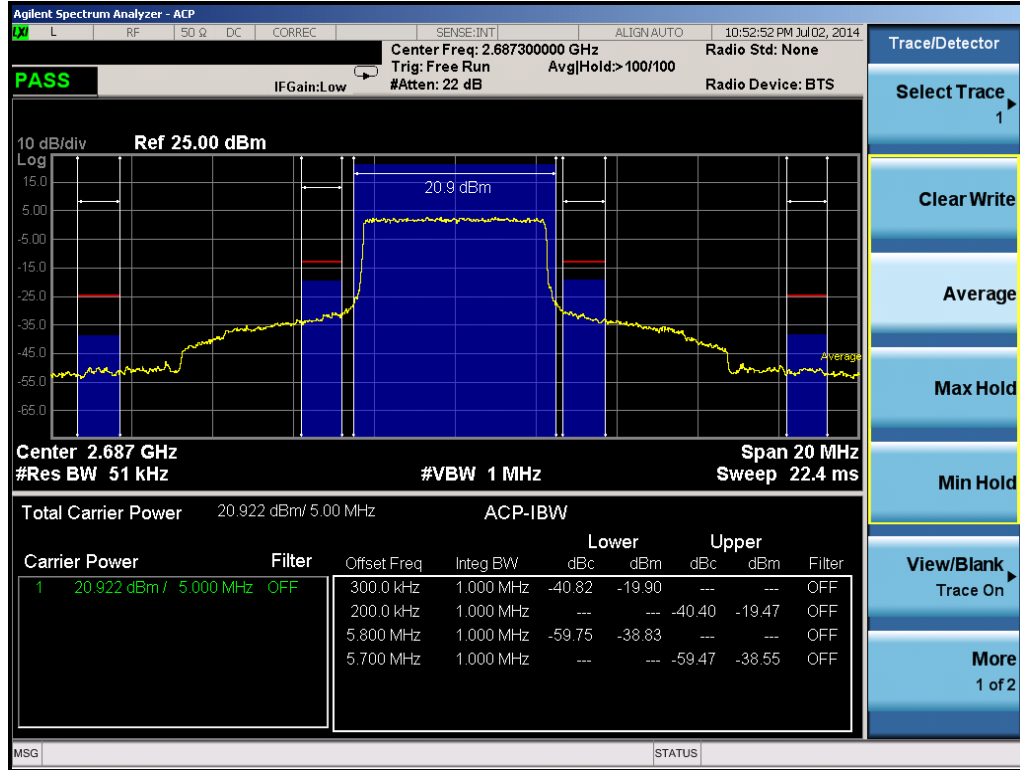

Plot 6-96. Upper ACP Plot (Band 41 – 5.0MHz QPSK – RB Size 25)

FCC ID: A3LSPHL720T		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407011336.	Test Dates: 7/3 - 7/7/2014	EUT Type: Portable Handset		Page 63 of 82

## 6.5 Peak-Average Ratio

### §24.232(d)

#### Test Overview

A peak to average ratio measurement is performed at the conducted port of the EUT. The spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level.

#### Test Procedure Used


KDB 971168 v02r01 – Section 5.7.1

#### Test Settings

1. The signal analyzer's CCDF measurement profile is enabled
2. Frequency = carrier center frequency
3. Measurement BW > Emission bandwidth of signal
4. The signal analyzer was set to collect one million samples to generate the CCDF curve
5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms. For burst transmissions, the spectrum analyzer is set to use an internal "RF Burst" trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the "on time" of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power

#### Test Setup

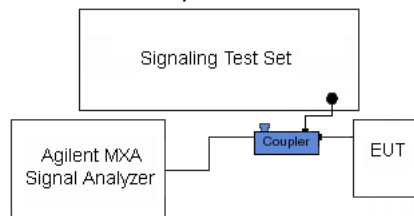

The EUT and measurement equipment were set up as shown in the diagram below.




**Figure 6-4. Test Instrument & Measurement Setup**


#### Test Notes

None.

FCC ID: A3LSPHL720T		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407011336.	Test Dates: 7/3 - 7/7/2014	EUT Type: Portable Handset		Page 64 of 82

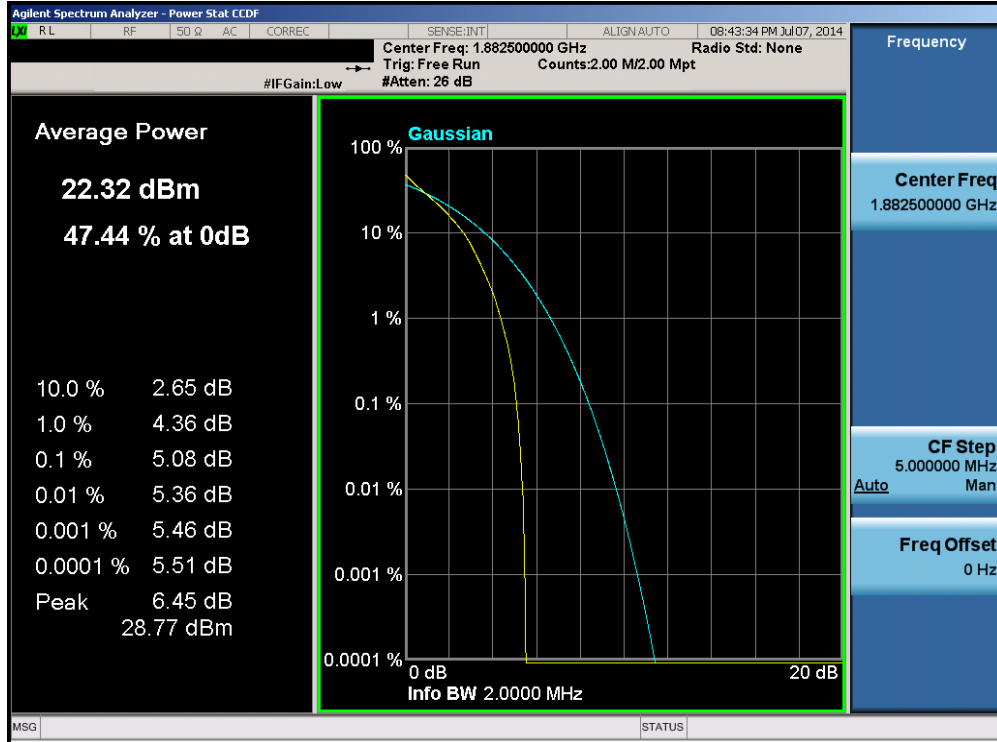


Plot 6-97. PAR Plot (Band 25 – 1.4MHz QPSK – RB Size 6)

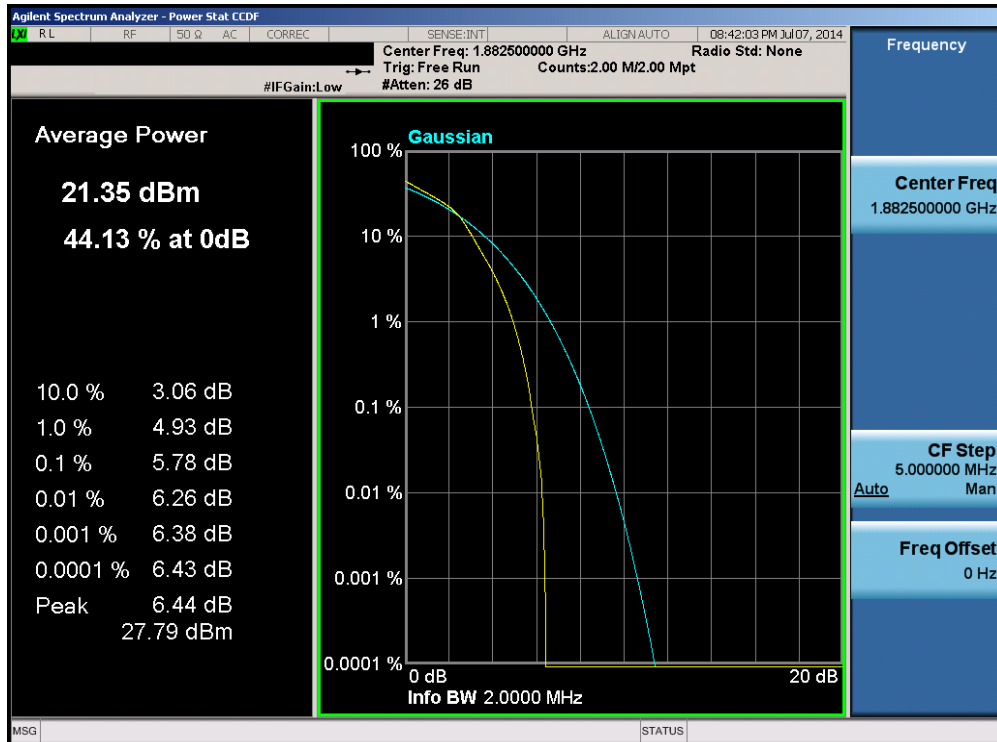


Plot 6-98. PAR Plot (Band 25 – 1.4MHz 16-QAM – RB Size 6)

FCC ID: A3LSPHL720T		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407011336.	Test Dates: 7/3 - 7/7/2014	EUT Type: Portable Handset		Page 65 of 82

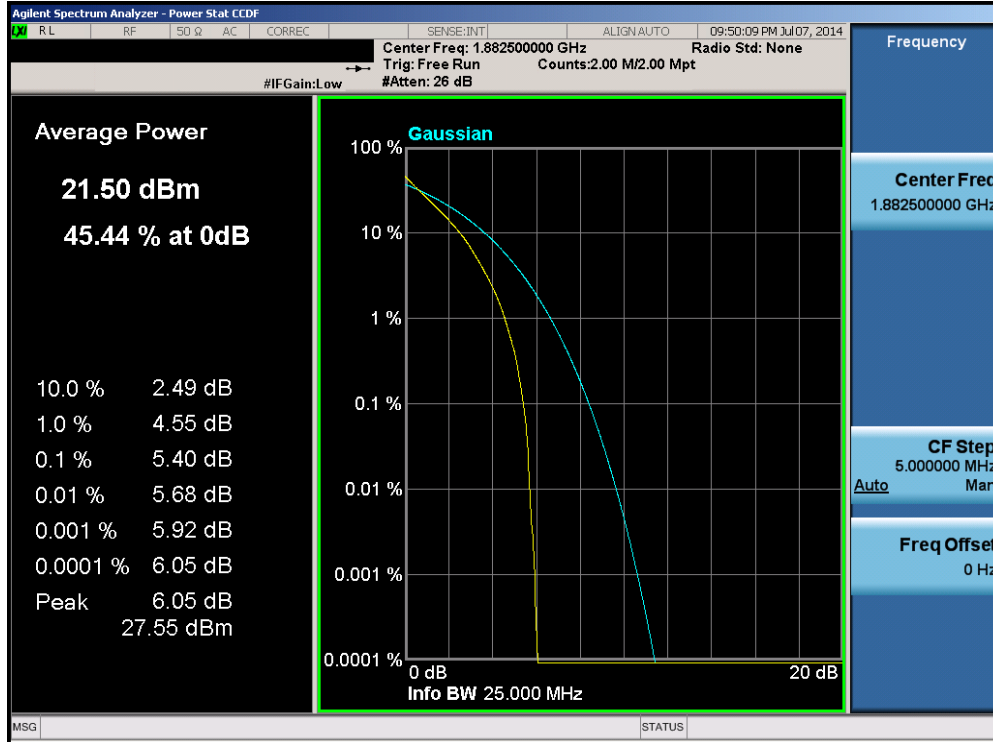


Plot 6-99. PAR Plot (Band 25 – 15.0MHz QPSK – RB Size 75)

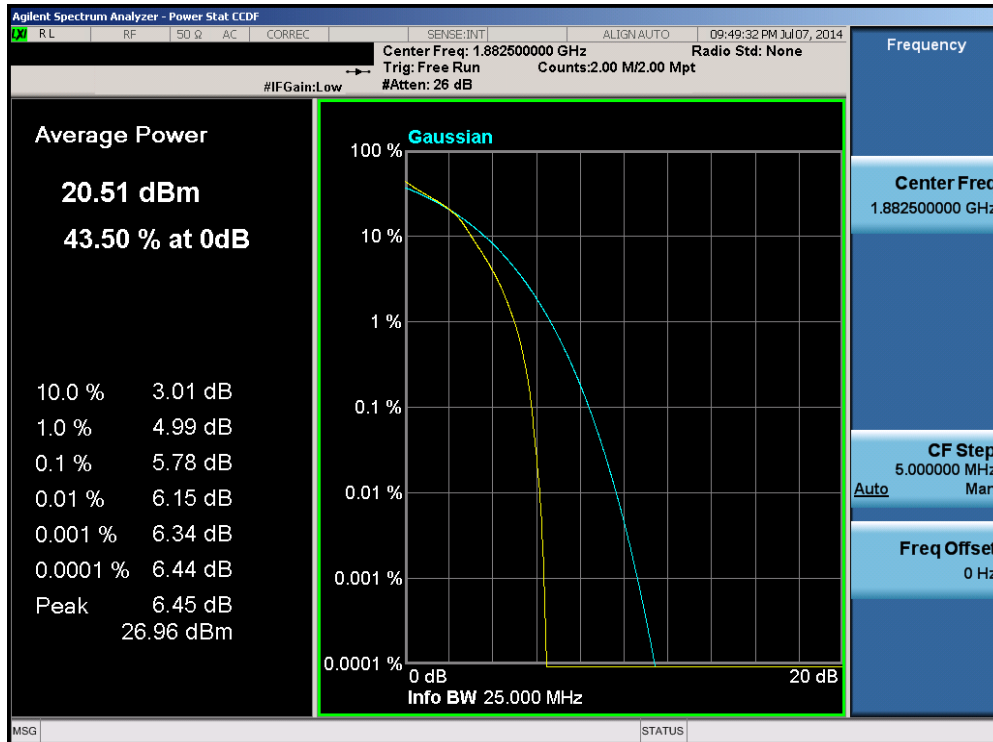


Plot 6-100. PAR Plot (Band 25 – 15.0MHz 16-QAM – RB Size 75)

FCC ID: A3LSPHL720T		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407011336.	Test Dates: 7/3 - 7/7/2014	EUT Type: Portable Handset		Page 66 of 82

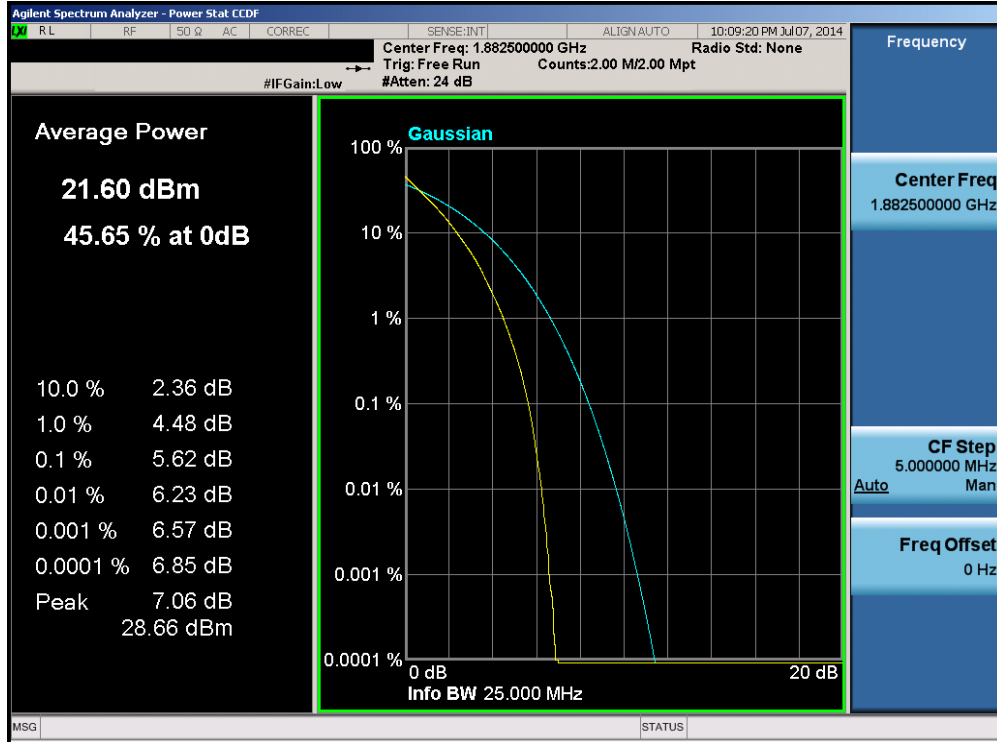

Plot 6-101. PAR Plot (Band 25 – 20.0MHz QPSK – RB Size 100)

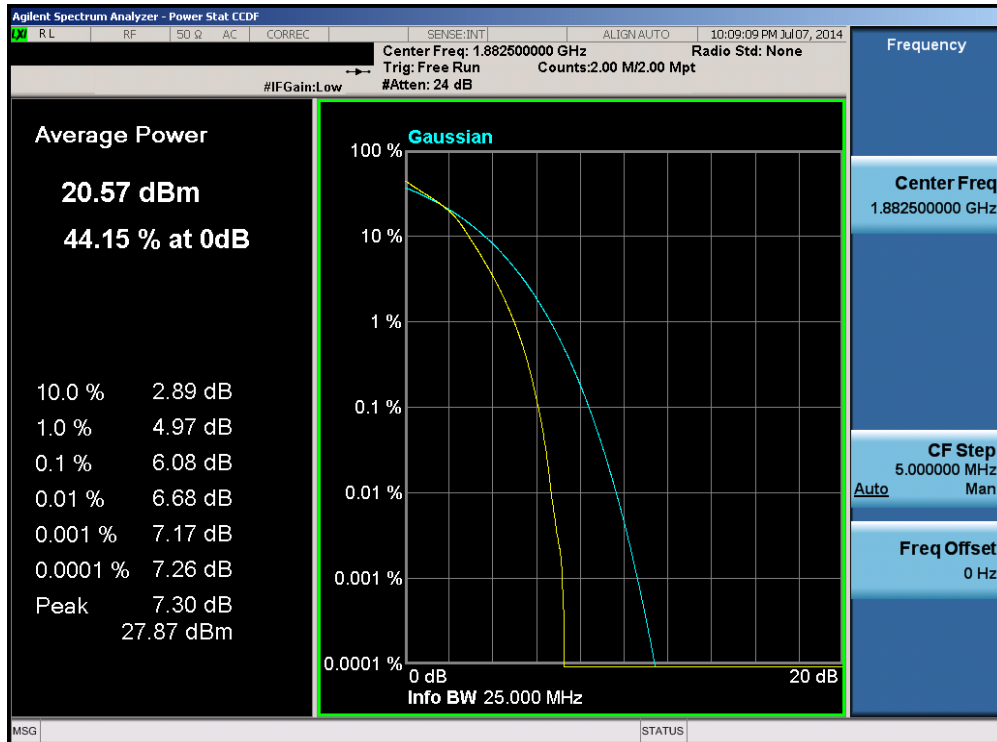

Plot 6-102. PAR Plot (Band 25 – 20.0MHz 16-QAM – RB Size 100)

FCC ID: A3LSPHL720T		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407011336.	Test Dates: 7/3 - 7/7/2014	EUT Type: Portable Handset		Page 67 of 82

## 6.6 Radiated Power (EIRP)

§24.232(c) §27.50(h.2)

### Test Overview

Equivalent Isotropic Radiated Power (EIRP) measurements are performed using the substitution method described in ANSI/TIA-603-C-2004 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using vertically polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically polarized broadband horn antennas. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.



### Test Procedures Used

KDB 971168 v02r01 – Section 5.2.1

ANSI/TIA-603-C-2004 – Section 2.2.17


### Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation. For signals with burst transmission, the signal analyzer's "time domain power" measurement capability is used
2. RBW = 1 – 5% of the expected OBW, not to exceed 1MHz
3. VBW  $\geq$  3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points  $\geq$  2 x span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".  
Trigger is set to enable triggering only on full power bursts with the sweep time set less than or equal to the transmission burst duration
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation. For signals with burst transmission, the "gating" function was enabled to ensure that measurements are performed during times in which the transmitter is operating at its maximum power
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

FCC ID: A3LSPHL720T		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407011336.	Test Dates: 7/3 - 7/7/2014	EUT Type: Portable Handset		Page 68 of 82

### Test Setup

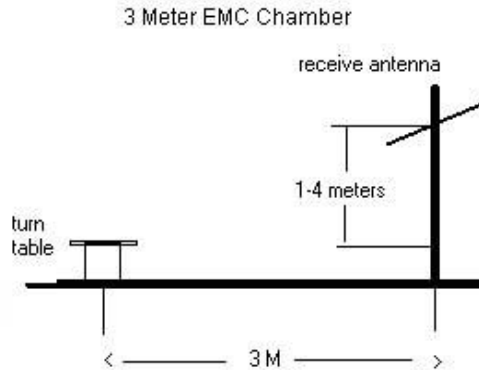

The EUT and measurement equipment were set up as shown in the diagram below.



**Figure 6-5. Test Instrument & Measurement Setup**

### Test Notes

- 1) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The “H” positioning is defined with the EUT lying flat on the test surface, the “H2” positioning is defined with the EUT standing up on its side, and the “V” positioning is defined with the EUT standing upright. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 2) The EUT is supplied with a new/fully-recharged battery. The battery for this model B600BU contains an embedded NFC antenna.



FCC ID: A3LSPHL720T		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407011336.	Test Dates: 7/3 - 7/7/2014	EUT Type: Portable Handset		Page 69 of 82

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Battery Cover	RB Size/Offset	Substitute Level [dBm]	Ant. Gain [dBi]	Ant. Pol. [H/V]	EUT Pol.	EIRP [dBm]	EIRP [Watts]	Margin [dB]
1850.70	1.4	QPSK	Standard	1 / 0	15.98	9.60	V	V	21.43	0.139	-11.58
1882.50	1.4	QPSK	Standard	1 / 0	15.05	9.53	V	V	20.43	0.110	-12.58
1914.30	1.4	QPSK	Standard	1 / 0	14.57	9.47	V	V	19.89	0.097	-13.12
1850.70	1.4	16-QAM	Standard	1 / 0	15.01	9.60	V	V	20.46	0.111	-12.55
1882.50	1.4	16-QAM	Standard	3 / 2	13.96	9.53	V	V	19.34	0.086	-13.67
1914.30	1.4	16-QAM	Standard	1 / 0	13.61	9.47	V	V	18.93	0.078	-14.08
1857.50	15	QPSK	Standard	1 / 74	16.28	9.58	V	V	21.71	0.148	-11.30
1882.50	15	QPSK	Standard	1 / 0	15.98	9.53	V	V	21.36	0.137	-11.65
1907.50	15	QPSK	Standard	1 / 74	14.18	9.48	V	V	19.51	0.089	-13.50
1857.50	15	16-QAM	Standard	1 / 74	15.15	9.58	V	V	20.58	0.114	-12.43
1882.50	15	16-QAM	Standard	1 / 0	15.03	9.53	V	V	20.41	0.110	-12.60
1907.50	15	16-QAM	Standard	1 / 74	13.28	9.48	V	V	18.61	0.073	-14.40
1860.00	20	QPSK	Standard	1 / 99	15.94	9.58	V	V	21.37	0.137	-11.64
1882.50	20	QPSK	Standard	1 / 0	14.92	9.53	V	V	20.30	0.107	-12.71
1905.00	20	QPSK	Standard	1 / 99	14.41	9.48	V	V	19.74	0.094	-13.27
1860.00	20	16-QAM	Standard	1 / 99	14.83	9.58	V	V	20.26	0.106	-12.75
1882.50	20	16-QAM	Standard	1 / 0	13.79	9.53	V	V	19.17	0.083	-13.84
1905.00	20	16-QAM	Standard	1 / 99	13.42	9.48	V	V	18.75	0.075	-14.26
1857.50	15	QPSK	WCC	1 / 99	13.28	7.43	V	H	16.56	0.045	-16.45

**Table 6-2. EIRP Data (Band 25)**

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Battery Cover	RB Size/Offset	Substitute Level [dBm]	Ant. Gain [dBi]	Ant. Pol. [H/V]	EUT Pol.	EIRP [dBm]	EIRP [Watts]	Margin [dB]
2499.00	5	QPSK	Standard	1 / 24	11.21	8.66	V	H2	19.87	0.097	-13.14
2593.00	5	QPSK	Standard	1 / 0	10.09	8.72	V	H2	18.81	0.076	-14.20
2687.30	5	QPSK	Standard	1 / 24	11.14	8.83	V	H2	19.97	0.099	-13.04
2499.00	5	16-QAM	Standard	1 / 24	8.89	8.66	V	H2	17.55	0.057	-15.46
2593.00	5	16-QAM	Standard	12 / 6	9.38	8.72	V	H2	18.10	0.065	-14.91
2687.30	5	16-QAM	Standard	1 / 24	7.78	8.83	V	H2	16.61	0.046	-16.40
2687.30	5	QPSK	WCC	1 / 0	9.60	6.68	V	H	16.28	0.042	-16.73

**Table 6-3. EIRP Data (Band 41)**

FCC ID: A3LSPHL720T		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407011336.	Test Dates: 7/3 - 7/7/2014	EUT Type: Portable Handset	Page 70 of 82	

## 6.7 Radiated Spurious Emissions Measurements

§2.1053 §24.238(a) §27.53(m)

### Test Overview

Radiated spurious emissions measurements are performed using the substitution method described in ANSI/TIA-603-C-2004 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using vertically and vertically polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as peak measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

### Test Procedures Used

KDB 971168 v02r01 – Section 5.8


ANSI/TIA-603-C-2004 – Section 2.2.12

### Test Settings



1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW  $\geq$  3 x RBW
3. Span = 1.5 times the OBW
4. No. of sweep points  $\geq$  2 x span / RBW
5. Detector = Peak
6. Trace mode = max hold
7. The trace was allowed to stabilize

### Test Setup

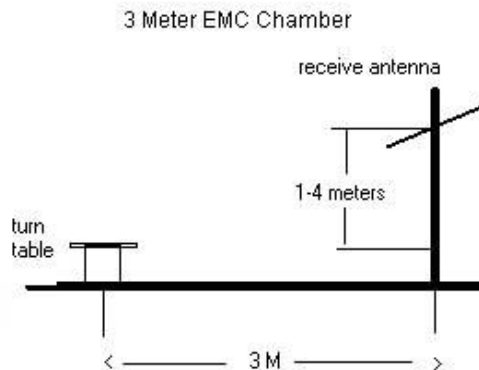The EUT and measurement equipment were set up as shown in the diagram below.



**Figure 6-6. Test Instrument & Measurement Setup**

FCC ID: A3LSPHL720T		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407011336.	Test Dates: 7/3 - 7/7/2014	EUT Type: Portable Handset		Page 71 of 82



### Test Notes

- 1) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The “H” positioning is defined with the EUT lying flat on the test surface, the “H2” positioning is defined with the EUT standing up on its side, and the “V” positioning is defined with the EUT standing upright. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 2) The EUT is supplied with a new/fully-recharged battery. The battery for this model B600BU contains an embedded NFC antenna.
- 3) The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter. The worst-case emissions are reported.
- 4) Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.

OPERATING FREQUENCY: 1857.50 MHz  
 CHANNEL: 26115  
 MEASURED OUTPUT POWER: 21.71 dBm = 0.148 W  
 MODULATION SIGNAL: QPSK  
 BANDWIDTH: 15.0 MHz  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10}(W) =$  34.71 dBc

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	[dBc]
3715.00	-48.85	9.40	-39.45	H	H2	61.2
5572.50	-56.79	10.83	-45.96	H	H2	67.7
7430.00	-54.65	10.76	-43.89	H	H2	65.6
9287.50	-55.39	11.59	-43.80	H	H2	65.5
11145.00	-54.15	12.78	-41.38	H	H2	63.1

**Table 6-4. Radiated Spurious Data (Band 25 – Low Channel)**

FCC ID: A3LSPHL720T		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407011336.	Test Dates: 7/3 - 7/7/2014	EUT Type: Portable Handset	Page 72 of 82	

OPERATING FREQUENCY: 1882.50 MHz  
 CHANNEL: 26365  
 MEASURED OUTPUT POWER: 21.36 dBm = 0.137 W  
 MODULATION SIGNAL: QPSK  
 BANDWIDTH: 15.0 MHz  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10}(W) =$  34.36 dBc



Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	[dBc]
3765.00	-45.09	9.27	-35.82	H	H2	57.2
5647.50	-51.29	11.06	-40.23	H	H2	61.6
7530.00	-53.79	10.99	-42.80	H	H2	64.2

**Table 6-5. Radiated Spurious Data (Band 25 – Mid Channel)**

OPERATING FREQUENCY: 1907.50 MHz  
 CHANNEL: 26615  
 MEASURED OUTPUT POWER: 19.51 dBm = 0.089 W  
 MODULATION SIGNAL: QPSK  
 BANDWIDTH: 15.0 MHz  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10}(W) =$  32.51 dBc

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	[dBc]
3815.00	-54.06	9.19	-44.87	H	H2	64.4
5722.50	-55.77	11.27	-44.49	H	H2	64.0
7630.00	-54.77	11.17	-43.60	H	H2	63.1

**Table 6-6. Radiated Spurious Data (Band 25 – High Channel)**

FCC ID: A3LSPHL720T		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407011336.	Test Dates: 7/3 - 7/7/2014	EUT Type: Portable Handset	Page 73 of 82	

OPERATING FREQUENCY: 1882.50 MHz  
 CHANNEL: 26365  
 MEASURED OUTPUT POWER: 16.56 dBm = 0.045 W  
 MODULATION SIGNAL: QPSK  
 BANDWIDTH: 15.0 MHz  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10}(W) =$  29.56 dBc



Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	[dBc]
3765.00	-48.07	9.27	-38.80	H	H2	60.2
5647.50	-54.90	11.06	-43.84	H	H2	65.2
7530.00	-58.30	10.99	-47.31	H	H2	68.7

**Table 6-7. Radiated Spurious Data with WCC (Band 25 – Mid Channel)**

OPERATING FREQUENCY: 2499.00 MHz  
 CHANNEL: 39680  
 MEASURED OUTPUT POWER: 19.87 dBm = 0.097 W  
 MODULATION SIGNAL: QPSK  
 BANDWIDTH: 5.0 MHz  
 DISTANCE: 3 meters  
 LIMIT:  $55 + 10 \log_{10}(W) =$  44.87 dBc

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	[dBc]
4998.00	-42.62	10.93	-31.69	H	H2	51.6
7497.00	-47.96	10.92	-37.04	H	H2	56.9
9996.00	-54.08	12.02	-42.05	H	H2	61.9

**Table 6-8. Radiated Spurious Data (Band 41 – Low Channel)**

FCC ID: A3LSPHL720T		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407011336.	Test Dates: 7/3 - 7/7/2014	EUT Type: Portable Handset	Page 74 of 82	

OPERATING FREQUENCY: 2593.00 MHz  
 CHANNEL: 40620  
 MEASURED OUTPUT POWER: 18.81 dBm = 0.076 W  
 MODULATION SIGNAL: QPSK  
 BANDWIDTH: 5.0 MHz  
 DISTANCE: 3 meters  
 LIMIT:  $55 + 10 \log_{10}(W) =$  43.81 dBc



Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	[dBc]
5186.00	-45.92	10.60	-35.32	H	H2	54.1
7779.00	-44.82	11.22	-33.60	H	H2	52.4
10372.00	-54.70	12.36	-42.34	H	H2	61.1

**Table 6-9. Radiated Spurious Data (Band 41 – Mid Channel)**

OPERATING FREQUENCY: 2687.30 MHz  
 CHANNEL: 41565  
 MEASURED OUTPUT POWER: 19.97 dBm = 0.099 W  
 MODULATION SIGNAL: QPSK  
 BANDWIDTH: 5.0 MHz  
 DISTANCE: 3 meters  
 LIMIT:  $55 + 10 \log_{10}(W) =$  44.97 dBc

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	[dBc]
5374.60	-41.36	10.37	-30.99	H	H2	51.0
8061.90	-60.02	12.61	-47.41	H	H2	67.4
10749.20	-58.47	12.95	-45.52	H	H2	65.5



**Table 6-10. Radiated Spurious Data (Band 41 – High Channel)**

FCC ID: A3LSPHL720T		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407011336.	Test Dates: 7/3 - 7/7/2014	EUT Type: Portable Handset	Page 75 of 82	

OPERATING FREQUENCY: 2687.30 MHz  
 CHANNEL: 41565  
 MEASURED OUTPUT POWER: 16.28 dBm = 0.042 W  
 MODULATION SIGNAL: QPSK  
 BANDWIDTH: 5.0 MHz  
 DISTANCE: 3 meters  
 LIMIT:  $55 + 10 \log_{10}(W) =$  41.28 dBc

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	[dBc]
5374.60	-44.84	10.37	-34.47	H	H2	54.4
8061.90	-63.61	12.61	-51.00	H	H2	71.0
10749.20	-62.01	12.95	-49.06	H	H2	69.0

**Table 6-11. Radiated Spurious Data with WCC (Band 41 – High Channel)**

FCC ID: A3LSPHL720T		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407011336.	Test Dates: 7/3 - 7/7/2014	EUT Type: Portable Handset	Page 76 of 82	

## 6.8 Frequency Stability / Temperature Variation

\$2.1055 \$24.235 \$27.54

### Test Overview and Limit

Frequency stability testing is performed in accordance with the guidelines of ANSI/TIA-603-C-2004. The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

***For Part 24 and Part 27, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.***

### Test Procedure Used

ANSI/TIA-603-C-2004

### Test Settings



1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

### Test Setup

The EUT was connected via an RF cable to a spectrum analyzer with the EUT placed inside an environmental chamber.

### Test Notes

None

FCC ID: A3LSPHL720T		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407011336.	Test Dates: 7/3 - 7/7/2014	EUT Type: Portable Handset	Page 77 of 82	

## Band 25 Frequency Stability Measurements

§2.1055 §24.235



OPERATING FREQUENCY: 1,882,500,000 Hz  
 CHANNEL: 26365  
 REFERENCE VOLTAGE: 3.80 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	+ 20 (Ref)	1,882,499,986	-14	-0.0000007
100 %		- 30	1,882,499,987	-13	-0.0000007
100 %		- 20	1,882,500,018	18	0.0000010
100 %		- 10	1,882,499,986	-14	-0.0000007
100 %		0	1,882,500,001	1	0.0000001
100 %		+ 10	1,882,500,019	19	0.0000010
100 %		+ 20	1,882,500,014	14	0.0000007
100 %		+ 30	1,882,500,009	9	0.0000005
100 %		+ 40	1,882,499,980	-20	-0.0000011
100 %		+ 50	1,882,499,995	-5	-0.0000003
115 %		4.37	+ 20	1,882,499,988	-12
BATT. ENDPOINT	3.40	+ 20	1,882,499,990	-10	-0.0000005


**Table 6-12. Frequency Stability Data (Band 25)**

**Note:**



Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: A3LSPHL720T		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407011336.	Test Dates: 7/3 - 7/7/2014	EUT Type: Portable Handset	Page 78 of 82	

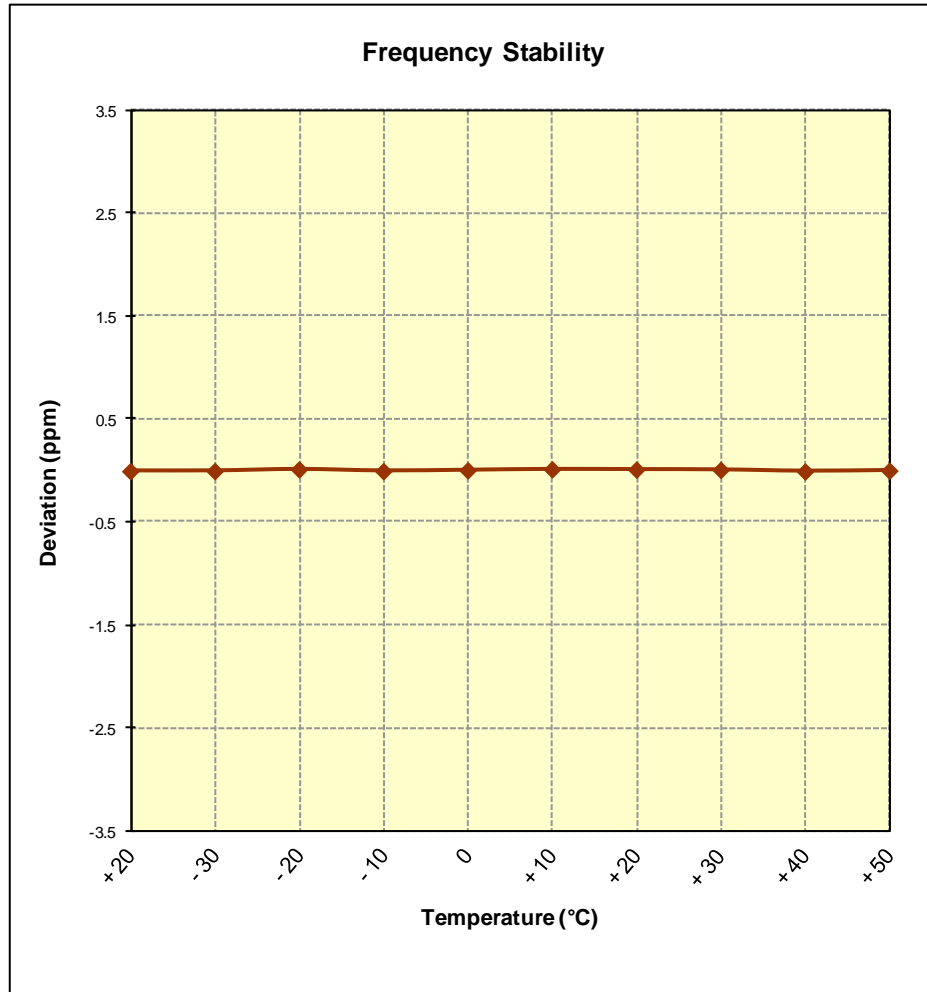**Band 25 Frequency Stability Measurements**  
§2.1055 §24.235



**Figure 6-7. Frequency Stability Graph (Band 25)**

FCC ID: A3LSPHL720T		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407011336.	Test Dates: 7/3 - 7/7/2014	EUT Type: Portable Handset	Page 79 of 82	

## Band 41 Frequency Stability Measurements

§2.1055 §27.54



OPERATING FREQUENCY: 2,590,000,000 Hz  
 CHANNEL: 40590  
 REFERENCE VOLTAGE: 3.80 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	+ 20 (Ref)	2,590,000,003	3	0.0000001
100 %		- 30	2,589,999,986	-14	-0.0000005
100 %		- 20	2,590,000,015	15	0.0000006
100 %		- 10	2,589,999,983	-17	-0.0000007
100 %		0	2,590,000,018	18	0.0000007
100 %		+ 10	2,589,999,991	-9	-0.0000003
100 %		+ 20	2,589,999,995	-5	-0.0000002
100 %		+ 30	2,589,999,983	-17	-0.0000007
100 %		+ 40	2,589,999,992	-8	-0.0000003
100 %		+ 50	2,589,999,982	-18	-0.0000007
115 %		4.37	+ 20	2,589,999,997	-3
BATT. ENDPOINT	3.40	+ 20	2,590,000,017	17	0.0000007


**Table 6-13. Frequency Stability Data (Band 41)**

**Note:**

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: A3LSPHL720T		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407011336.	Test Dates: 7/3 - 7/7/2014	EUT Type: Portable Handset	Page 80 of 82	

**Band 41 Frequency Stability Measurements**  
**§2.1055 §27.54**

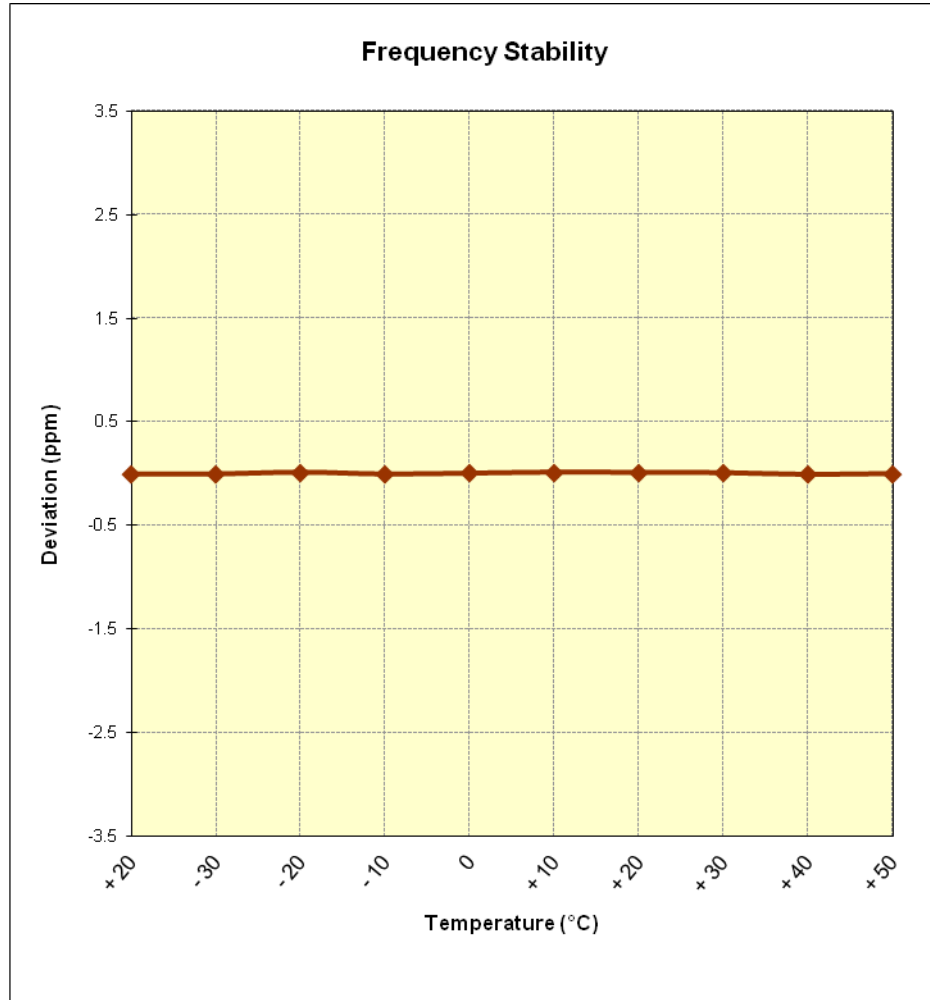



**Figure 6-8. Frequency Stability Graph (Band 41)**

FCC ID: A3LSPHL720T		FCC Pt. 24 & 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407011336.	Test Dates: 7/3 - 7/7/2014	EUT Type: Portable Handset	Page 81 of 82	

## 7.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **Samsung Portable Handset FCC ID: A3LSPHL720T** complies with all the requirements of Parts 2, 24, 27 of the FCC rules for LTE operation only.

FCC ID: A3LSPHL720T		<b>FCC Pt. 24 &amp; 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1407011336.	<b>Test Dates:</b> 7/3 - 7/7/2014	<b>EUT Type:</b> Portable Handset		Page 82 of 82