



# FCC RF Test Report

APPLICANT : SAMSUNG Electronics Co., LTD.  
EQUIPMENT : Mobile Phone  
BRAND NAME : Samsung  
MODEL NAME : SC-03E  
MARKETING NAME : GQ DCM  
FCC ID : A3LSWDSC03E  
STANDARD : FCC Part 15 Subpart C §15.247  
CLASSIFICATION : (DTS) Digital Transmission System

The product was received on Oct. 15, 2012 and completely tested on Oct. 27, 2012. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures and shown the compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:

Jones Tsai / Manager



## SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1<sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.



## TABLE OF CONTENTS

REVISION HISTORY ..... 3

SUMMARY OF TEST RESULT ..... 4

1 GENERAL DESCRIPTION ..... 5

    1.1 Applicant ..... 5

    1.2 Manufacturer ..... 5

    1.3 Feature of Equipment Under Test ..... 5

    1.4 Testing Site ..... 6

    1.5 Applied Standards ..... 6

    1.6 Ancillary Equipment List ..... 6

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST ..... 7

    2.1 RF Output Power ..... 7

    2.2 Test Mode ..... 8

    2.3 Connection Diagram of Test System ..... 9

    2.4 RF Utility ..... 9

3 TEST RESULT ..... 10

    3.1 6dB Bandwidth Measurement ..... 10

    3.2 Peak Output Power Measurement ..... 13

    3.3 Power Spectral Density Measurement ..... 16

    3.4 Conducted Band Edges and Spurious Emission Measurement ..... 22

    3.5 Radiated Band Edges and Spurious Emission Measurement ..... 31

    3.6 AC Conducted Emission Measurement ..... 45

    3.7 Antenna Requirements ..... 55

4 LIST OF MEASURING EQUIPMENT ..... 56

5 UNCERTAINTY OF EVALUATION ..... 57



### REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR201541A	Rev. 01	Initial issue of report	Oct. 31, 2012



### SUMMARY OF TEST RESULT

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	A8.2(a)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.2	15.247(b)(1)	A8.1(b)	Peak Output Power	$\leq 30\text{dBm}$	Pass	-
3.5	15.247(e)	A8.2(b)	Power Spectral Density	$\leq 8\text{dBm}$	Pass	-
3.4	15.247(d)	A8.5	Conducted Band Edges and Spurious Emission	$\leq 20\text{dBc}$	Pass	-
3.5	15.247(d)	A8.5	Radiated Band Edges and Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 9.22 dB at 2483.500 MHz
3.6	15.207	Gen 7.2.2	AC Conducted Emission	15.207(a)	Pass	Under limit 7.20 dB at 0.430 MHz
3.7	15.203 & 15.247(b)	A8.4	Antenna Requirement	N/A	Pass	-

# 1 General Description

## 1.1 Applicant

**SAMSUNG Electronics Co., LTD.**

IT center, 416, Maetan-3dong, Yeongtong-gu, Suwon-city, Gyeonggi-do, Korea

## 1.2 Manufacturer

**SAMSUNG Electronics Co., LTD.**

IT center, 416, Maetan-3dong, Yeongtong-gu, Suwon-city, Gyeonggi-do, Korea

## 1.3 Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Phone
Brand Name	Samsung
Model Name	SC-03E
Marketing Name	GQ DCM
FCC ID	A3LSWDSC03E
EUT supports Radios application	GSM/EGPRS/WCDMA/HSPA/ WLAN 11abgn / Bluetooth
HW Version	REV0.1
SW Version	SC03E.001
EUT Stage	Identical Prototype

**Remark:** The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

Product Specification subjective to this standard	
Tx/Rx Frequency Range	2402 MHz ~ 2480 MHz
Number of Channels	40
Carrier Frequency of Each Channel	40 Channel(37 hopping + 3 advertising channel)
Maximum Output Power to Antenna	Bluetooth 4.0 - LE : 6.89 dBm (0.0049 W)
Antenna Type	PIFA Antenna type with gain -6.58 dBi
Type of Modulation	Bluetooth 4.0 - LE : GFSK

## 1.4 Testing Site

<b>Test Site</b>	SPORTON INTERNATIONAL INC.			
<b>Test Site Location</b>	No. 52, Hwa Ya 1 <sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL: +886-3-3273456 / FAX: +886-3-3284978			
<b>Test Site No.</b>	<b>Sporton Site No.</b>			<b>FCC/IC Registration No.</b>
	TH02-HY	CO05-HY	03CH06-HY	722060/4086B-1

## 1.5 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v02
- ♦ ANSI C63.4-2003 and ANSI C63.10-2009
- ♦ IC RSS-210 Issue 8
- ♦ IC RSS-Gen Issue 3

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

## 1.6 Ancillary Equipment List

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
2.	WLAN AP	D-Link	DIR-825	KA2DIR825A1	N/A	Unshielded, 1.8 m
3.	Notebook	DELL	Latitude E6320	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
4.	Bluetooth Earphone	Sony Ericsson	MW600	PY7DDA-2029	N/A	N/A



## 2 Test Configuration of Equipment Under Test

### 2.1 RF Output Power

The RF output power was recorded in the following table:

Channel	Frequency	Bluetooth 4.0 – LE RF Output Power	
		Data Rate / Modulation	
		GFSK	
		1Mbps	
Ch00	2402MHz	6.89	dBm
Ch19	2440MHz	6.66	dBm
Ch39	2480MHz	5.86	dBm



## 2.2 Test Mode

The EUT has been associated with peripherals pursuant to ANSI C63.4-2003 and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction (150 kHz to 30 MHz), radiation (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).

Pre-scanned tests, X, Y, Z in three orthogonal panels, were conducted to determine the final configuration from all possible combinations.


The following tables are showing the test modes as the worst cases (X plane) and recorded in this report.

The following tables are showing the test modes as the worst cases and recorded in this report.


Test Cases	
Test Item	Data Rate / Modulation
	Bluetooth 4.0 – LE / GFSK
Conducted TCs	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps
	Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps
	Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
Radiated TCs	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps
	Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps
	Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
AC Conducted Emission	Mode 1 :GSM850 Idle + Bluetooth Link + WLAN (2.4G) Link + Earphone + MP3 + Adapter

## 2.3 Connection Diagram of Test System

<Bluetooth 4.0 – LE Tx Mode>

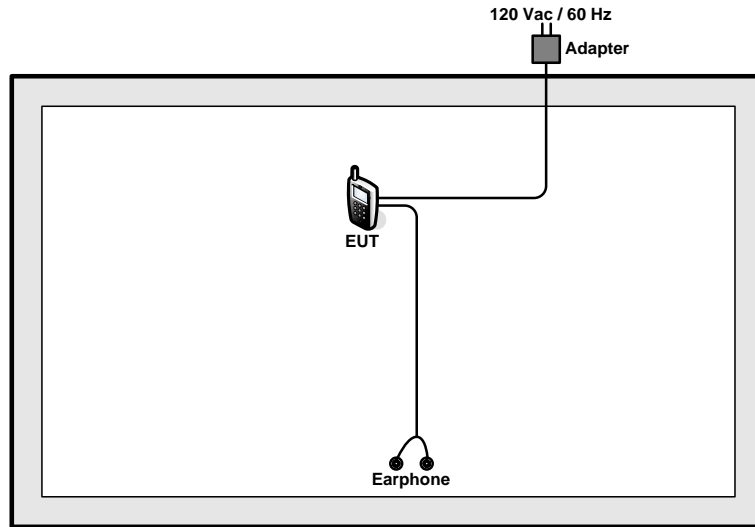

<AC Conducted Emission Mode>

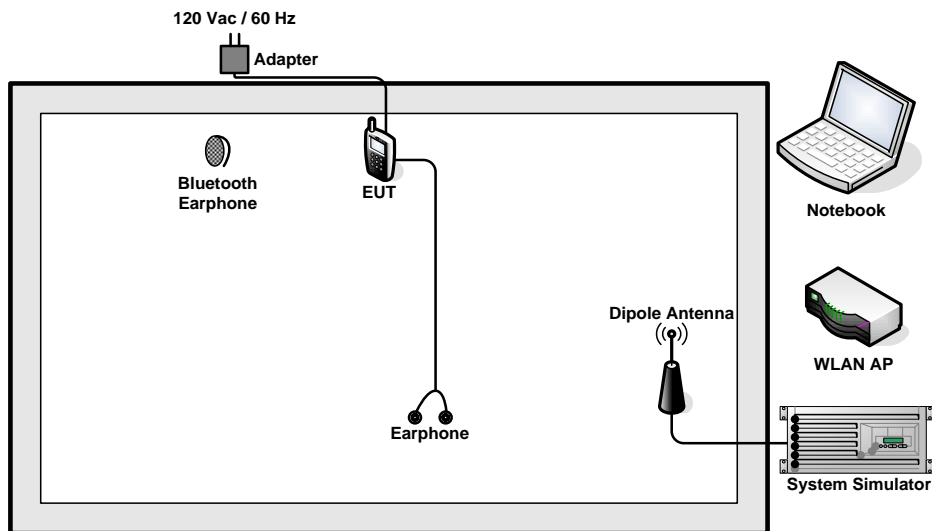

## 2.4 RF Utility

For Bluetooth function, key in “\* #533881 #” on the EUT directly. Then, the EUT will get into the engineering modes to provide functions like channel selection and power level for continuous transmitting and receiving signals.

### 3 Test Result

#### 3.1 6dB Bandwidth Measurement

##### 3.1.1 Limit of 6dB Bandwidth

The minimum 6 dB bandwidth shall be at least 500 KHz.


##### 3.1.2 Measuring Instruments

See list of measuring instruments of this test report.

##### 3.1.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v02.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 KHz.

##### 3.1.4 Test Setup

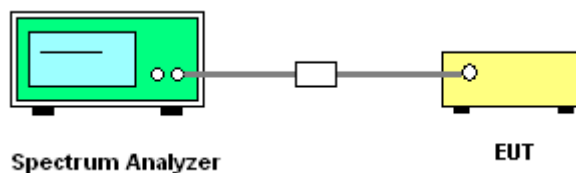




3.1.5 Test Result of 6dB Bandwidth

Test Mode :	Bluetooth 4.0 - LE	Temperature :	20~22°C
Test Engineer :	Slash Huang	Relative Humidity :	45~47%

Channel	Frequency (MHz)	6dB Bandwidth (MHz)
00	2402	0.70
19	2440	0.71
39	2480	0.70


6 dB Bandwidth Plot on Channel 00

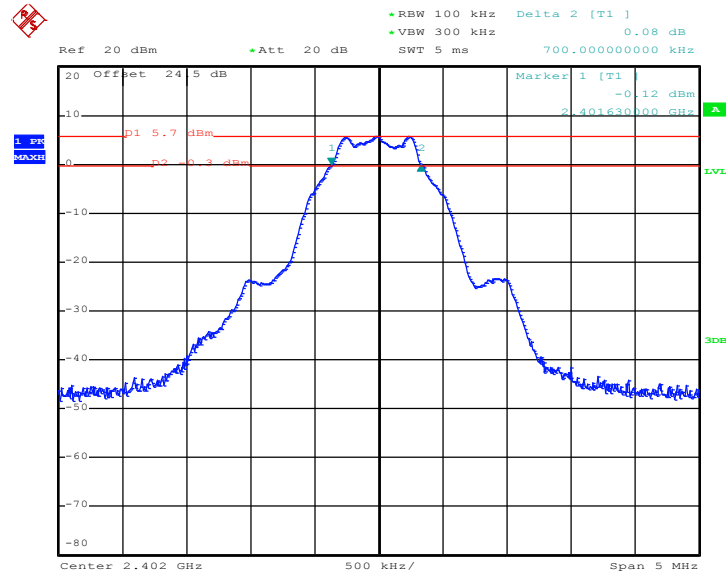

Date: 17.OCT.2012 23:47:47




6 dB Bandwidth Plot on Channel 19

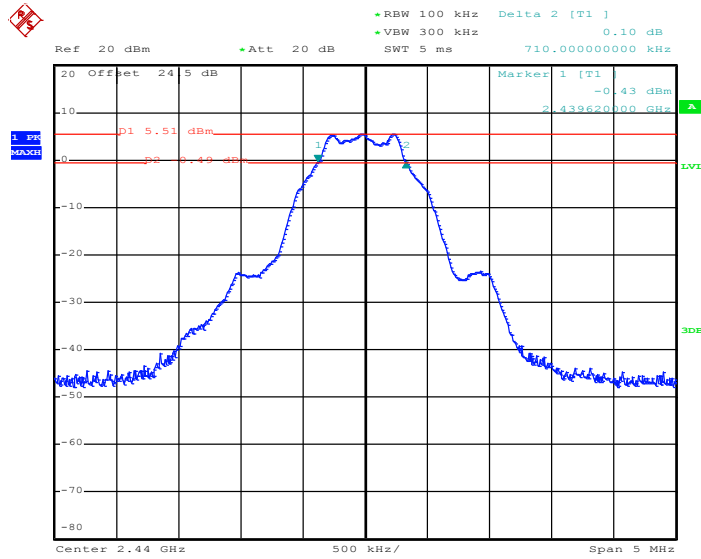

Date: 17.OCT.2012 23:50:50

6 dB Bandwidth Plot on Channel 39

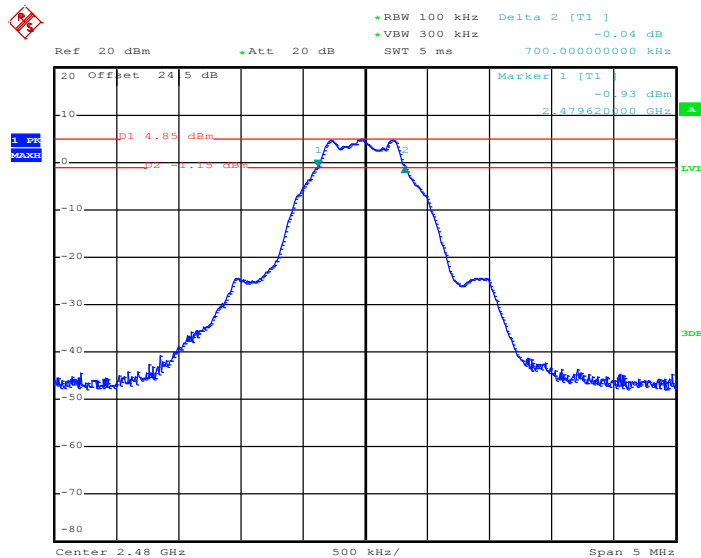

Date: 17.OCT.2012 23:53:06

## 3.2 Peak Output Power Measurement

### 3.2.1 Limit of Peak Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi are used the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


### 3.2.2 Measuring Instruments

See list of measuring instruments of this test report.

### 3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v02.
2. The RF output of EUT was connected to the power meter by a low loss cable
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

### 3.2.4 Test Setup

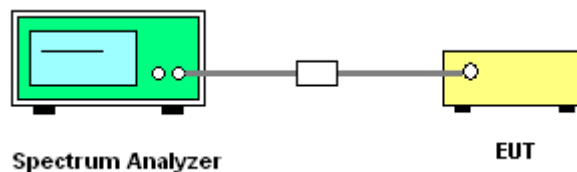




3.2.5 Test Result of Peak Output Power

Test Mode :	Bluetooth 4.0 - LE	Temperature :	20~22°C
Test Engineer :	Slash Huang	Relative Humidity :	45~47%

Channel	Frequency (MHz)	RF Power (dBm)		
		GFSK	Max. Limits (dBm)	Pass/Fail
		1 Mbps		
00	2402	6.89	30.00	Pass
19	2440	6.66	30.00	Pass
39	2480	5.86	30.00	Pass


Peak Output Power Plot on Channel 00

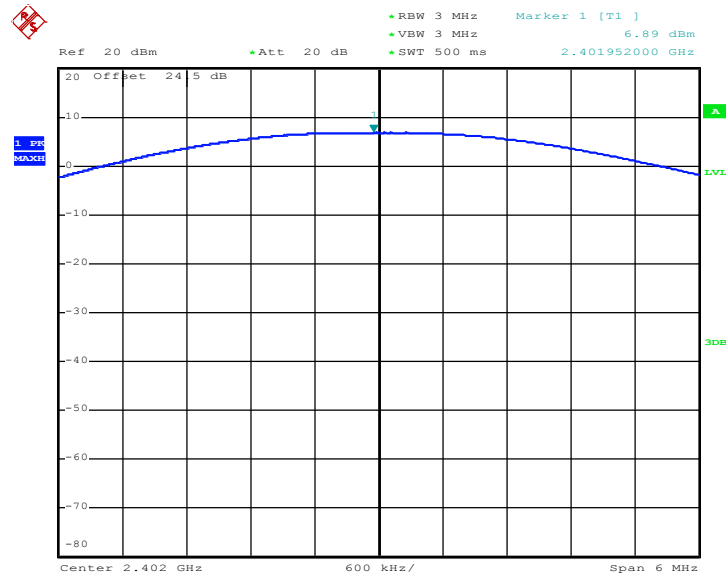

Date: 17.OCT.2012 01:02:13




Peak Output Power Plot on Channel 19

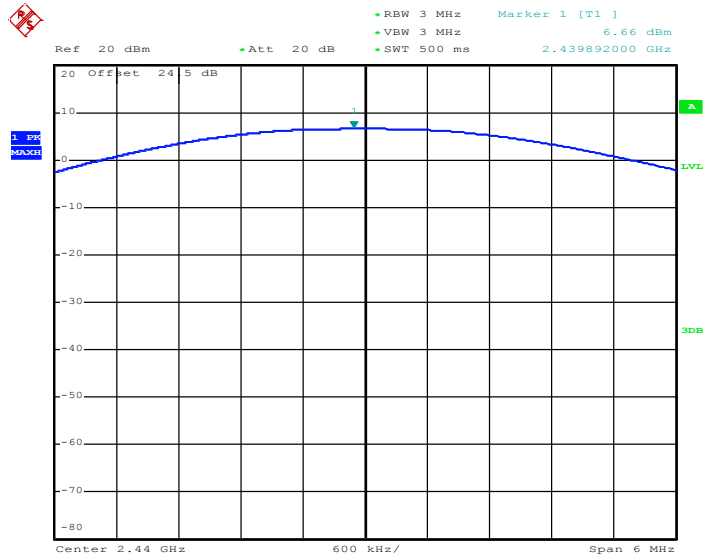

Date: 17.OCT.2012 01:02:30

Peak Output Power Plot on Channel 39

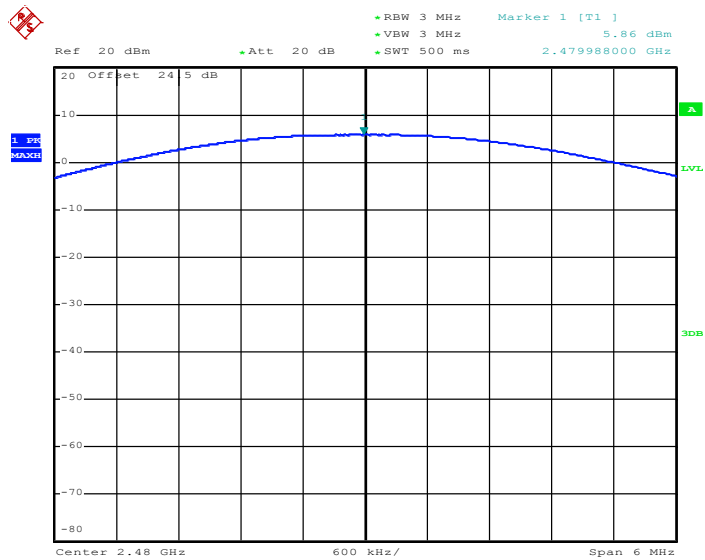

Date: 17.OCT.2012 01:03:07

### 3.3 Power Spectral Density Measurement

#### 3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3KHz band at any time interval of continuous transmission.


#### 3.3.2 Measuring Instruments

See list of measuring instruments of this test report.

#### 3.3.3 Test Procedures

1. The testing follows Measurement Procedure 9.1 Option 1 of FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v02
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Record the measurement data derived from spectrum analyzer.

#### 3.3.4 Test Setup

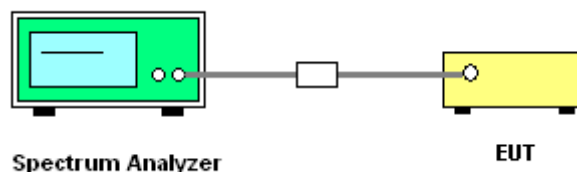



### 3.3.5 Test Result of Power Spectral Density

Test Mode :	Bluetooth 4.0 - LE	Temperature :	20~22°C
Test Engineer :	Slash Huang	Relative Humidity :	45~47%

Channel	Frequency (MHz)	Power Density		Max. Limits (dBm/3KHz)	Pass/Fail
		PSD/100KHz (dBm)	PSD/3KHz (dBm)		
00	2402	5.73	-7.81	8	Pass
19	2440	5.51	-7.88	8	Pass
39	2480	4.86	-8.66	8	Pass


**Note:**

1. Measured power density (dBm) has offset with cable loss.
2. The Measured power density (dBm)/ 100KHz is reference level and used as 20dBc down for Conducted Band Edges and Conducted Spurious Emission limit line.



### 3.3.6 Test Result of Power Spectral Density Plots (100kHz)


PSD 100kHz Plot on Channel 00

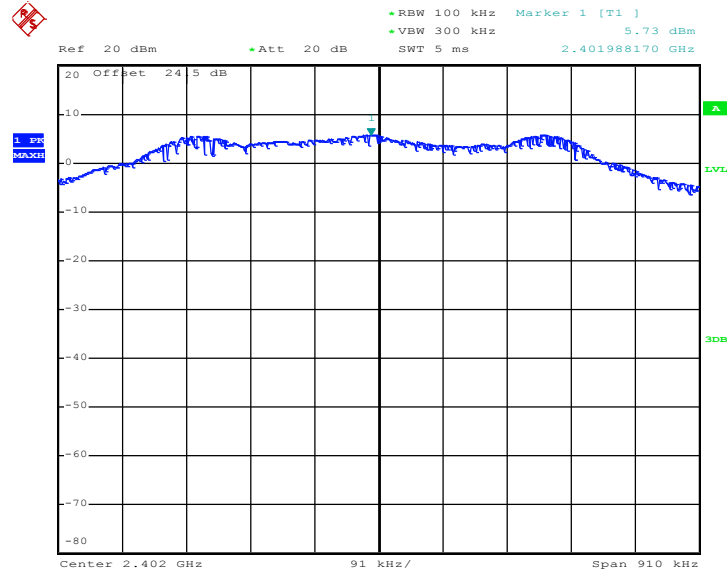

Date: 17.OCT.2012 23:48:17




PSD 100kHz Plot on Channel 19

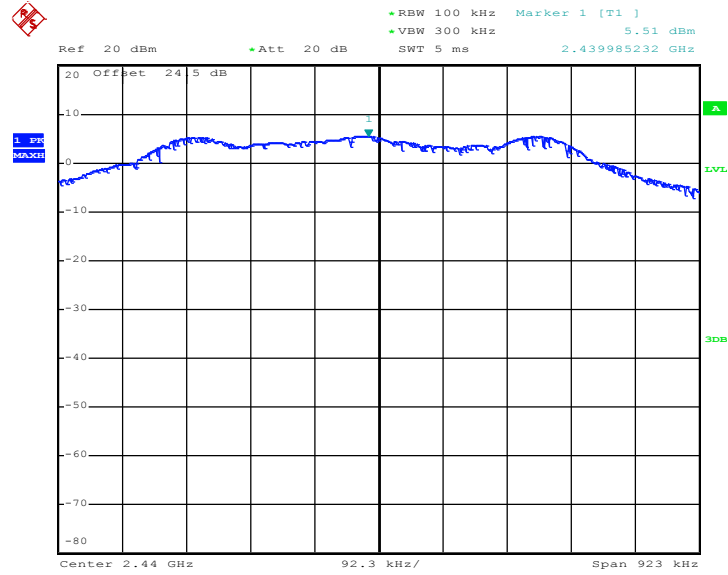

Date: 17.OCT.2012 23:51:20

PSD 100kHz Plot on Channel 39

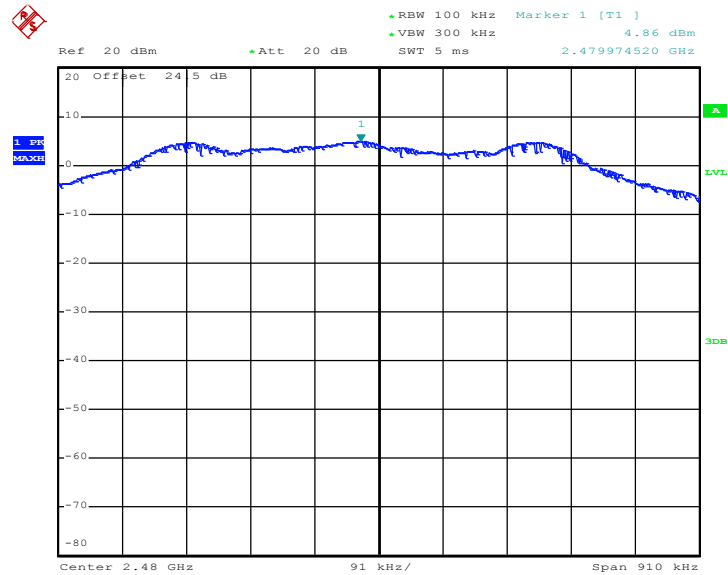


Date: 17.OCT.2012 23:53:36



### 3.3.7 Test Result of Power Spectral Density Plots (3kHz)


PSD 3kHz Plot on Channel 00

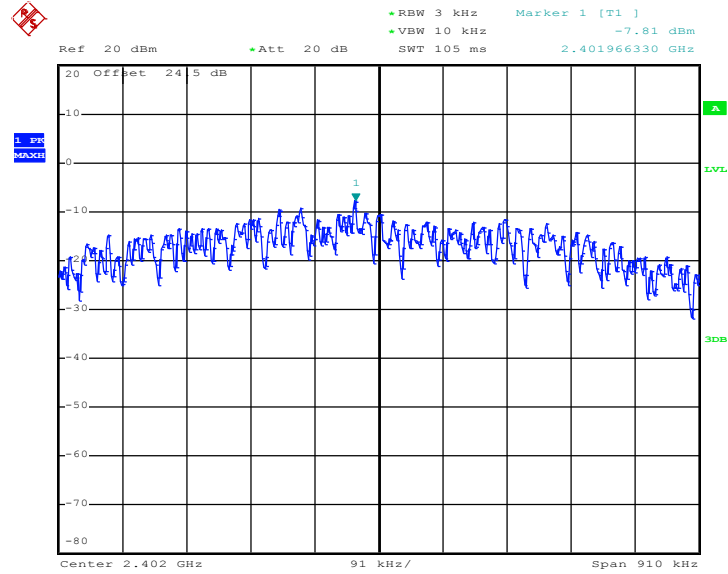

Date: 17.OCT.2012 23:48:12




PSD 3kHz Plot on Channel 19

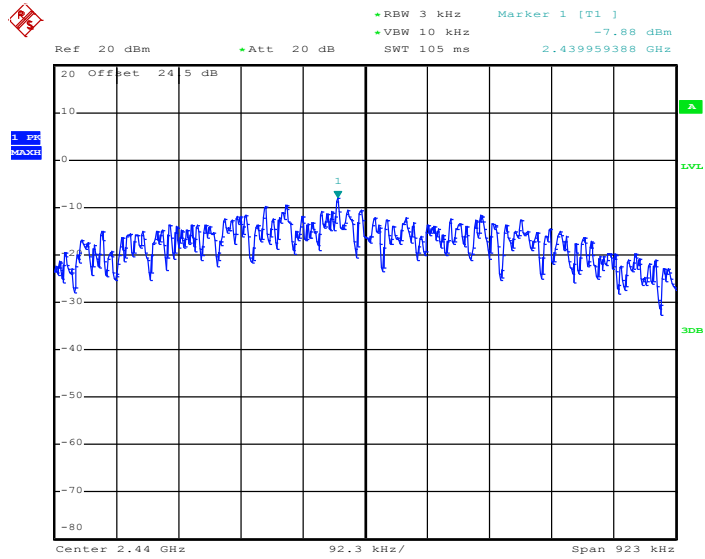

Date: 17.OCT.2012 23:51:14

PSD 3kHz Plot on Channel 39

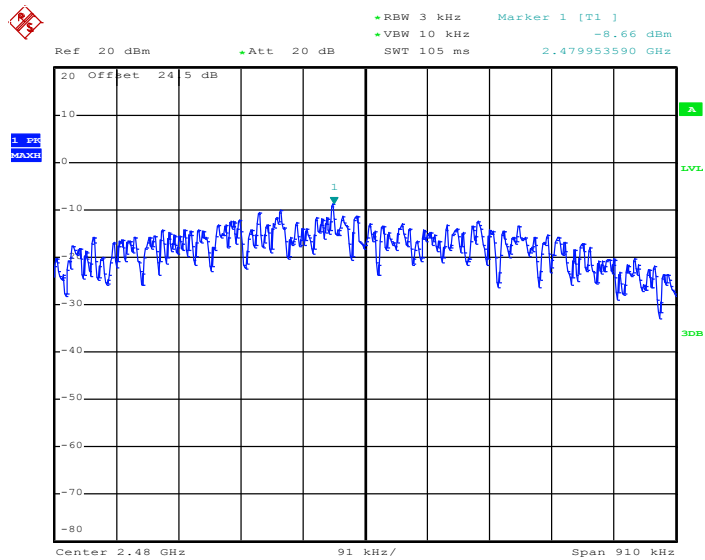

Date: 17.OCT.2012 23:53:30

### 3.4 Conducted Band Edges and Spurious Emission Measurement

#### 3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 20 dB down from the highest emission level within the authorized band.


#### 3.4.2 Measuring Instruments

See list of measuring instruments of this test report.

#### 3.4.3 Test Procedure

1. The testing follows the guidelines in ANSI C63.4-2003 and the Measurement Procedure of FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v02.
2. The transmitter output was connected to the spectrum analyzer via a low lose cable.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 KHz, Video bandwidth (VBW)  $\geq$  RBW. Out of the authorized frequency band emissions must be at least 20 dB lower than the highest emission level within the authorized band as measured with a 100 KHz RBW. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).

#### 3.4.4 Test Setup

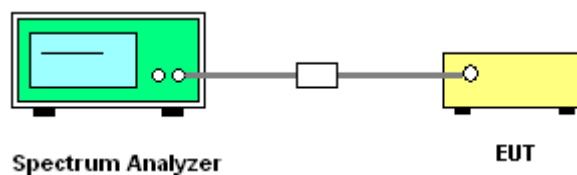




### 3.4.5 Test Result of Conducted Band Edges

Test Mode :	Bluetooth 4.0 - LE	Temperature :	20~22°C
Test Channel :	00 and 39	Relative Humidity :	45~47%
		Test Engineer :	Slash Huang


Low Band Edge Plot on Channel 00

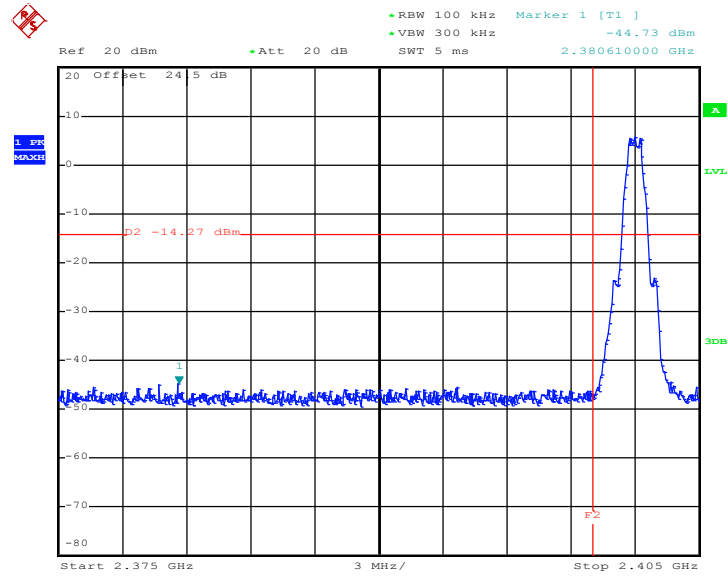

Date: 17.OCT.2012 23:48:38



High Band Edge Plot on Channel 39

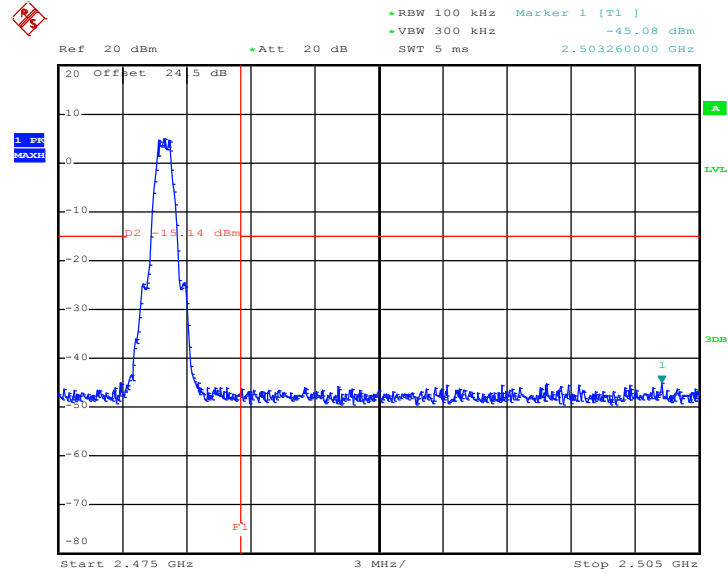


Date: 17.OCT.2012 23:53:53



### 3.4.6 Test Result of Conducted Spurious Emission

Test Mode :	Bluetooth 4.0 - LE	Temperature :	20~22°C
Test Channel :	00	Relative Humidity :	45~47%
		Test Engineer :	Slash Huang


Conducted Spurious Emission Plot on Bluetooth LE 1Mbps  
GFSK Channel 00

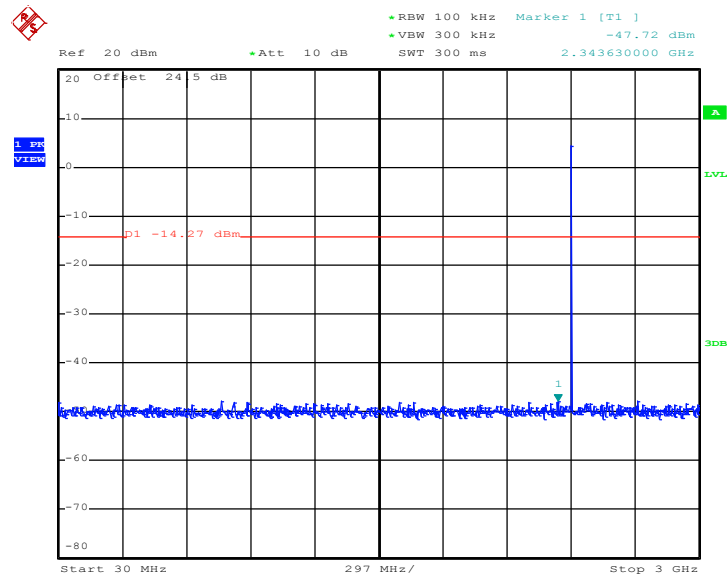

Date: 17.OCT.2012 23:49:00



Conducted Spurious Emission Plot on Bluetooth LE 1Mbps  
GFSK Channel 00

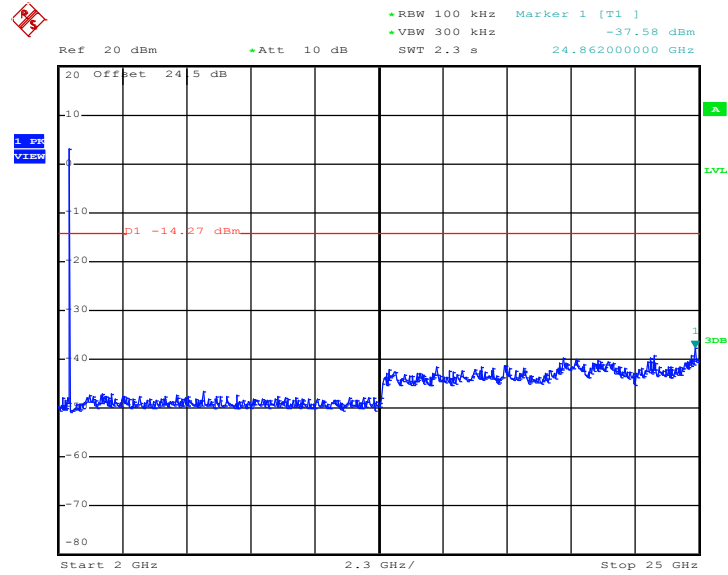


Date: 17.OCT.2012 23:49:17



Test Mode :	Bluetooth 4.0 - LE	Temperature :	20~22°C
Test Channel :	19	Relative Humidity :	45~47%
		Test Engineer :	Slash Huang


Conducted Spurious Emission Plot on Bluetooth LE 1Mbps  
GFSK Channel 19

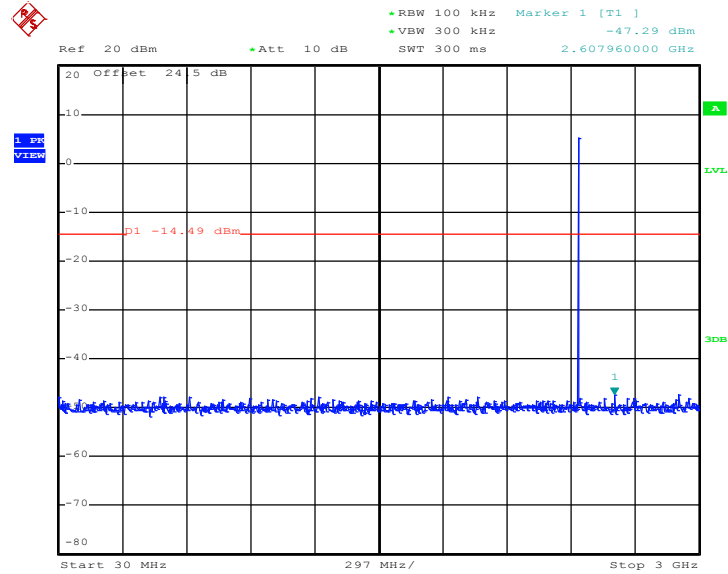

Date: 17.OCT.2012 23:51:40



Conducted Spurious Emission Plot on Bluetooth LE 1Mbps  
GFSK Channel 19

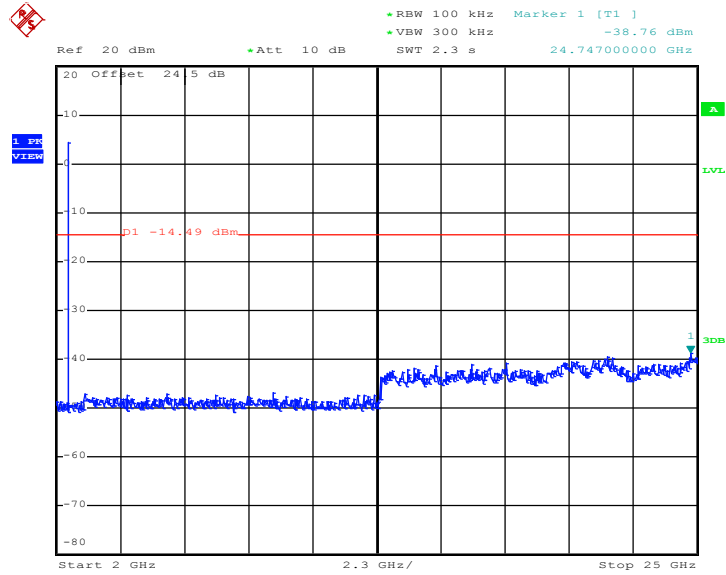


Date: 17.OCT.2012 23:51:58



Test Mode :	Bluetooth 4.0 - LE	Temperature :	20~22°C
Test Channel :	39	Relative Humidity :	45~47%
		Test Engineer :	Slash Huang


Conducted Spurious Emission Plot on Bluetooth LE 1Mbps  
GFSK Channel 39

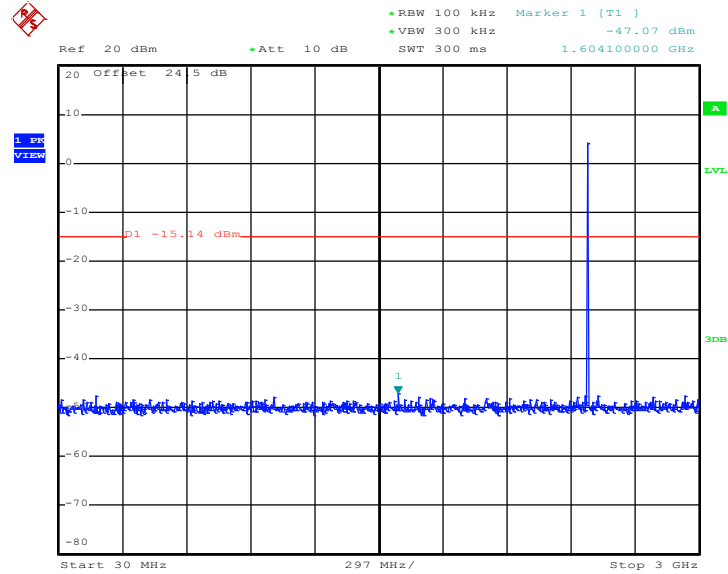

Date: 17.OCT.2012 23:54:13



Conducted Spurious Emission Plot on Bluetooth LE 1Mbps  
GFSK Channel 39

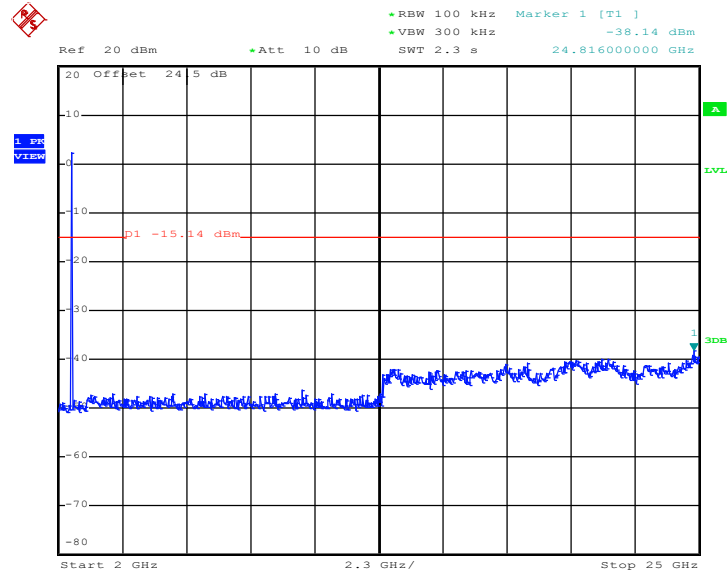

Date: 17.OCT.2012 23:54:31

### 3.5 Radiated Band Edges and Spurious Emission Measurement

#### 3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

#### 3.5.2 Measuring Instruments

See list of measuring instruments of this test report.

#### 3.5.3 Test Procedures

1. The testing follows the guidelines in ANSI C63.10-2009 and ANSI C63.4-2003 test site requirement.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. Use the following spectrum analyzer settings:
  - (1) Span shall wide enough to fully capture the emission being measured;



- (2) Set RBW=100 KHz for  $f < 1$  GHz;  $VBW \geq RBW$ ; Sweep = auto; Detector function = peak; Trace = max hold;
- (3) Set RBW = 1 MHz, VBW= 3MHz for  $f \geq 1$  GHz for peak measurement.

For average measurement:

- $VBW = 10$  Hz, when duty cycle is no less than 98 percent.
- $VBW \geq 1/T$ , when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

Band	Duty Cycle(%)	T(us)	1/T(KHz)	VBW Setting
Bluetooth 4.0 - LE	67.52	424.00	2.36	3kHz


**Note:** For average measurement with duty cycle < 98%, use reduced VBW measurement method 4.2.3.2.3 in ANSI C63.10.

**Marker-Delta method :**


- (1) Set RBW = 1 MHz, VBW = 3 MHz, peak detector.  
Repeat the measurement with an average detector, use RBW = 1MHz  
 $VBW = 10$  Hz, when duty cycle is no less than 98 percent.  
 $VBW \geq 1/T$ , when duty cycle is less than 98 percent
- (2) Set span = 10MHz, that encompasses both the peak of the fundamental emission and the band-edge emission under investigation. Set RBW = 100KHz, 1% of the total span. Set VBW = 100KHz  $\geq$  RBW.
- (3) Subtract the delta measured in step (2) from the field strengths measured in step (1).  
The resultant field strengths (peak/average) are then used to determine band-edge compliance as required by Section 15.205.

### 3.5.4 Test Setup


For radiated emissions below 30MHz

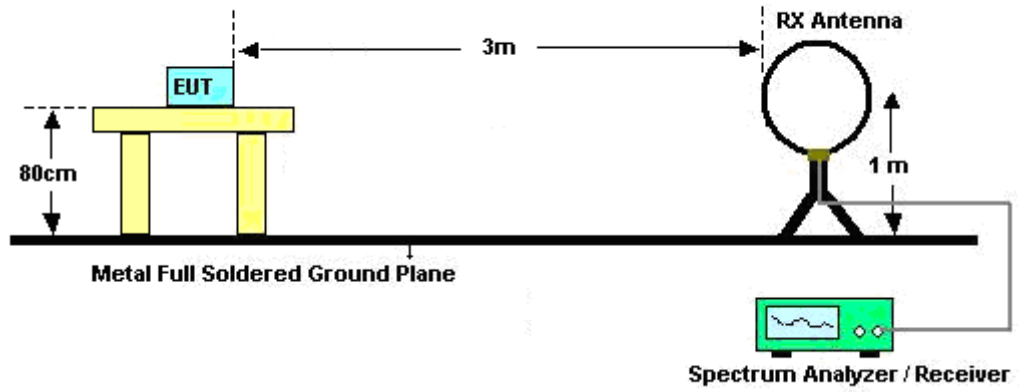

For radiated emissions from 30MHz to 1GHz

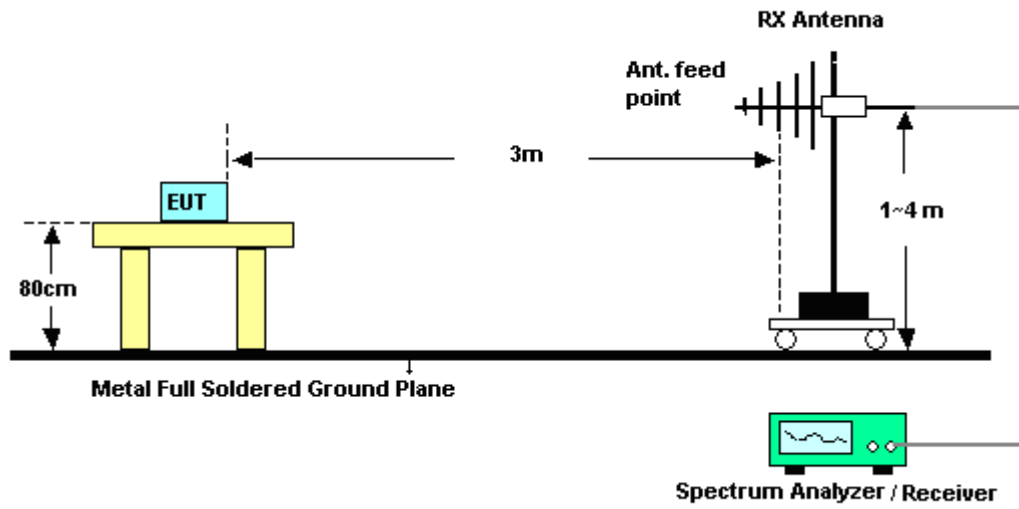

For radiated emissions above 1GHz

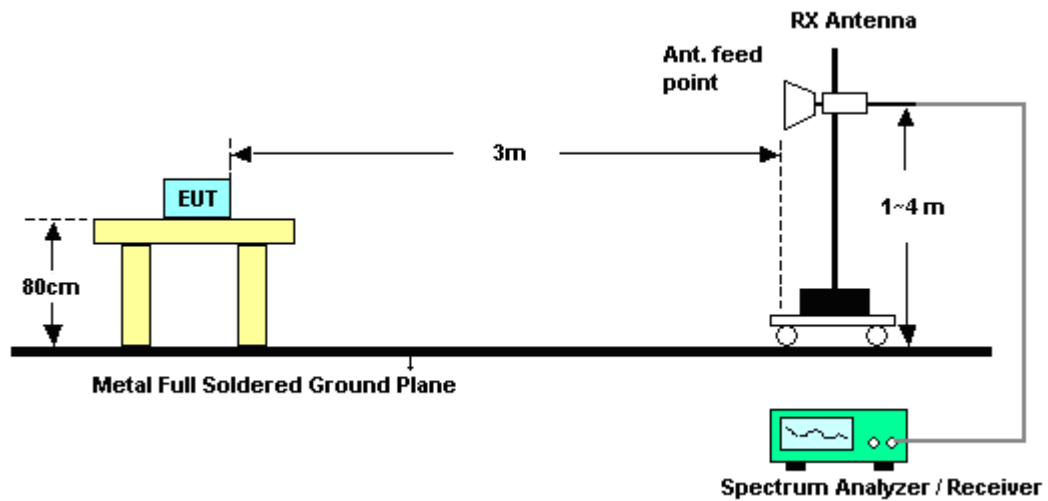

### 3.5.5 Test Results of Radiated Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 KHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.



3.5.6 Test Result of Radiated Band Edges

Test Mode :	Mode 1	Temperature :	23~24°C
Test Channel :	00	Relative Humidity :	42~43%
		Test Engineer :	Kai Wang, Ivan Chiang, and Timberland Lin

ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2354.91	48.77	-25.23	74	44.64	32.31	6.38	34.56	140	91	Peak
2389.74	37.78	-16.22	54	33.53	32.36	6.45	34.56	140	91	Average

ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2342.49	47	-27	74	42.9	32.28	6.38	34.56	100	226	Peak
2359.86	34.78	-19.22	54	30.61	32.31	6.42	34.56	100	226	Average



Test Mode :	Mode 3	Temperature :	23~24°C
Test Channel :	39	Relative Humidity :	42~43%
		Test Engineer :	Kai Wang, Ivan Chiang, and Timberland Lin

ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2483.52	65.68	-8.32	74	61.16	32.48	6.59	34.55	194	73	Peak
2483.5	62.59	8.59	54	58.07	32.48	6.59	34.55	194	73	Average
2483.52	104.71	-28.84	74	-	-	-	-	-	-	Peak
2483.5	103.94	-9.61	54	-	-	-	-	-	-	Average

Summary results of marker-delta method:

Test mode	Maximum field strength of the fundamental emission ( dBμV/m )	Delta Result ( dB )	Measurement Result ( dBμV/m )	Limit ( dBμV/m )	Margin ( dB )	Result
Peak	104.71	59.55	45.16	74	-28.84	Pass
Average	103.94	59.55	44.39	54	-9.61	Pass

Note : Measurement result = Maximum field strength – Delta result

ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2483.5	58.28	-15.72	74	53.76	32.48	6.59	34.55	100	340	Peak
2483.5	54.79	0.79	54	50.27	32.48	6.59	34.55	100	340	Average
2483.5	96.88	-28.49	74	-	-	-	-	-	-	Peak
2483.5	96.15	-9.22	54	-	-	-	-	-	-	Average


Summary results of marker-delta method:

Test mode	Maximum field strength of the fundamental emission ( dBμV/m )	Delta Result ( dB )	Measurement Result ( dBμV/m )	Limit ( dBμV/m )	Margin ( dB )	Result
Peak	96.88	51.37	45.51	74	-28.49	Pass
Average	96.15	51.37	44.78	54	-9.22	Pass

Note : Measurement result = Maximum field strength – Delta result




Test Mode :	Bluetooth Tx CH39_2480 MHz_1Mbps	Temperature :	23~24°C
Test Engineer :	Kai Wang, Ivan Chiang, and Timberland Lin	Relative Humidity :	42~43%
Condition :	3m	Polarization :	Horizontal

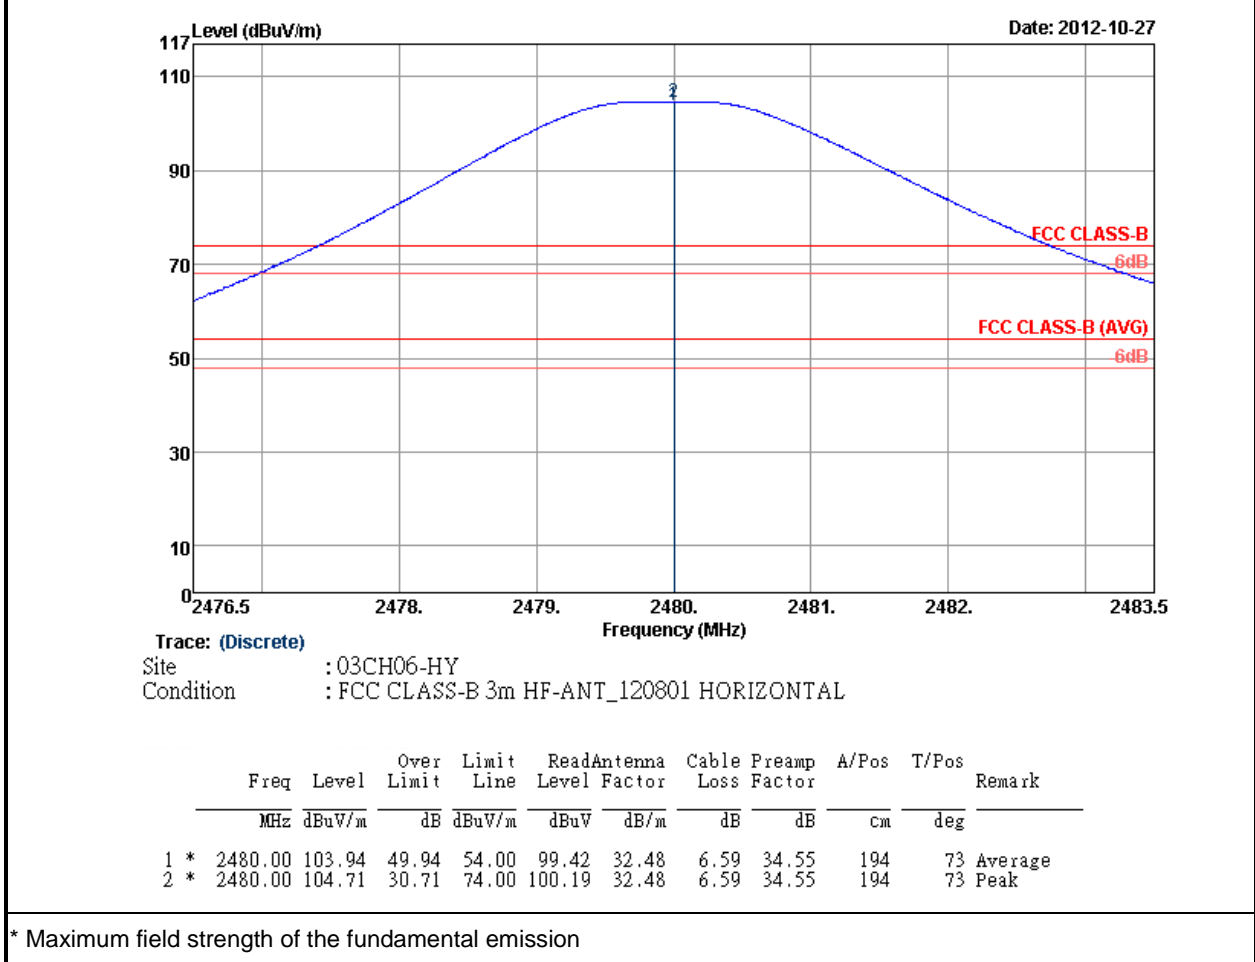




Test Mode :	Bluetooth Tx CH39_2480 MHz_1Mbps	Temperature :	23~24°C
Test Engineer :	Kai Wang, Ivan Chiang, and Timberland Lin	Relative Humidity :	42~43%
Condition :	3m	Polarization :	Horizontal

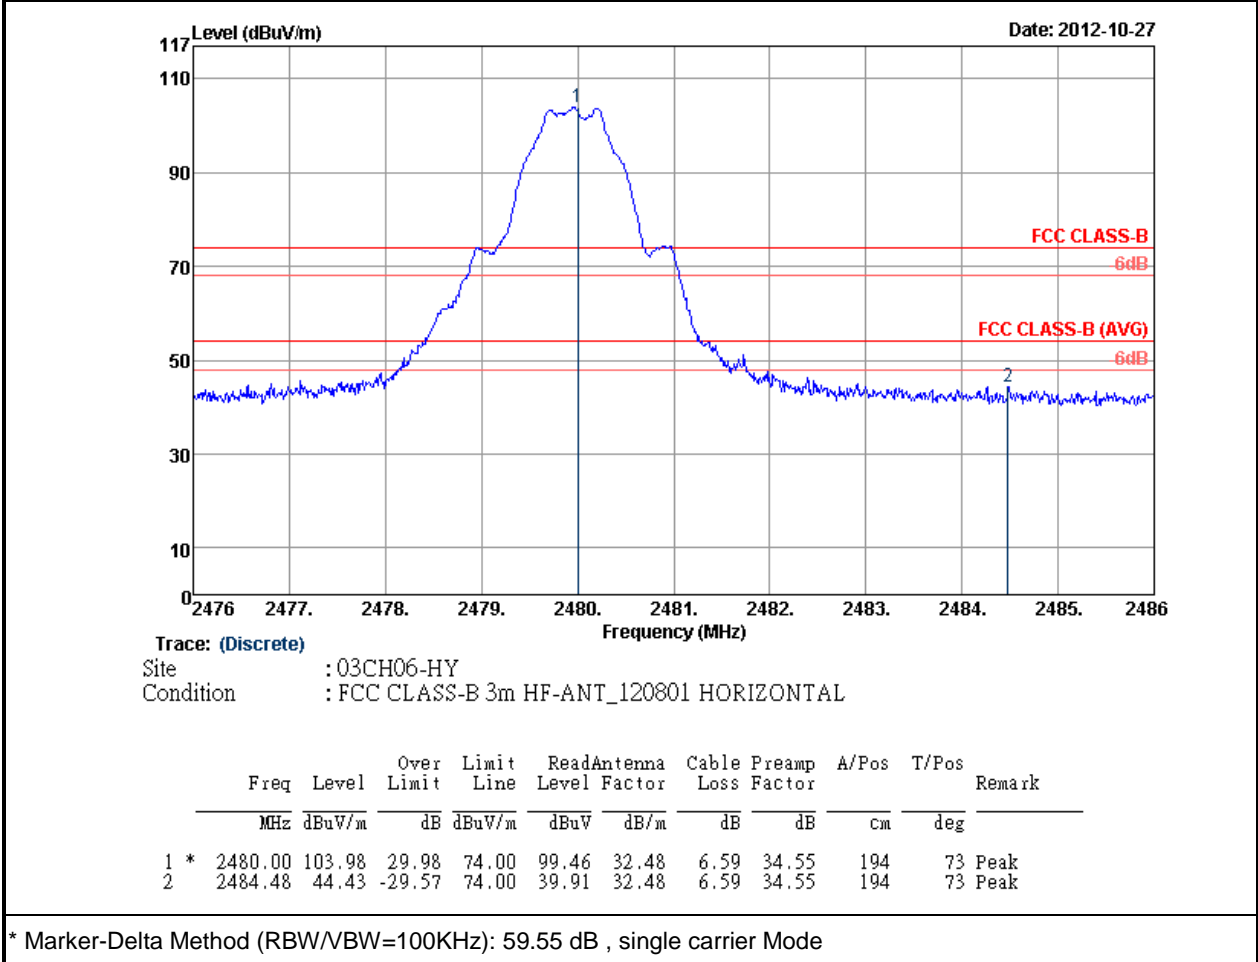




<b>Test Mode :</b>	Bluetooth Tx CH39_2480 MHz_1Mbps	<b>Temperature :</b>	23~24°C
<b>Test Engineer :</b>	Kai Wang, Ivan Chiang, and Timberland Lin	<b>Relative Humidity :</b>	42~43%
<b>Condition :</b>	3m	<b>Polarization :</b>	Vertical

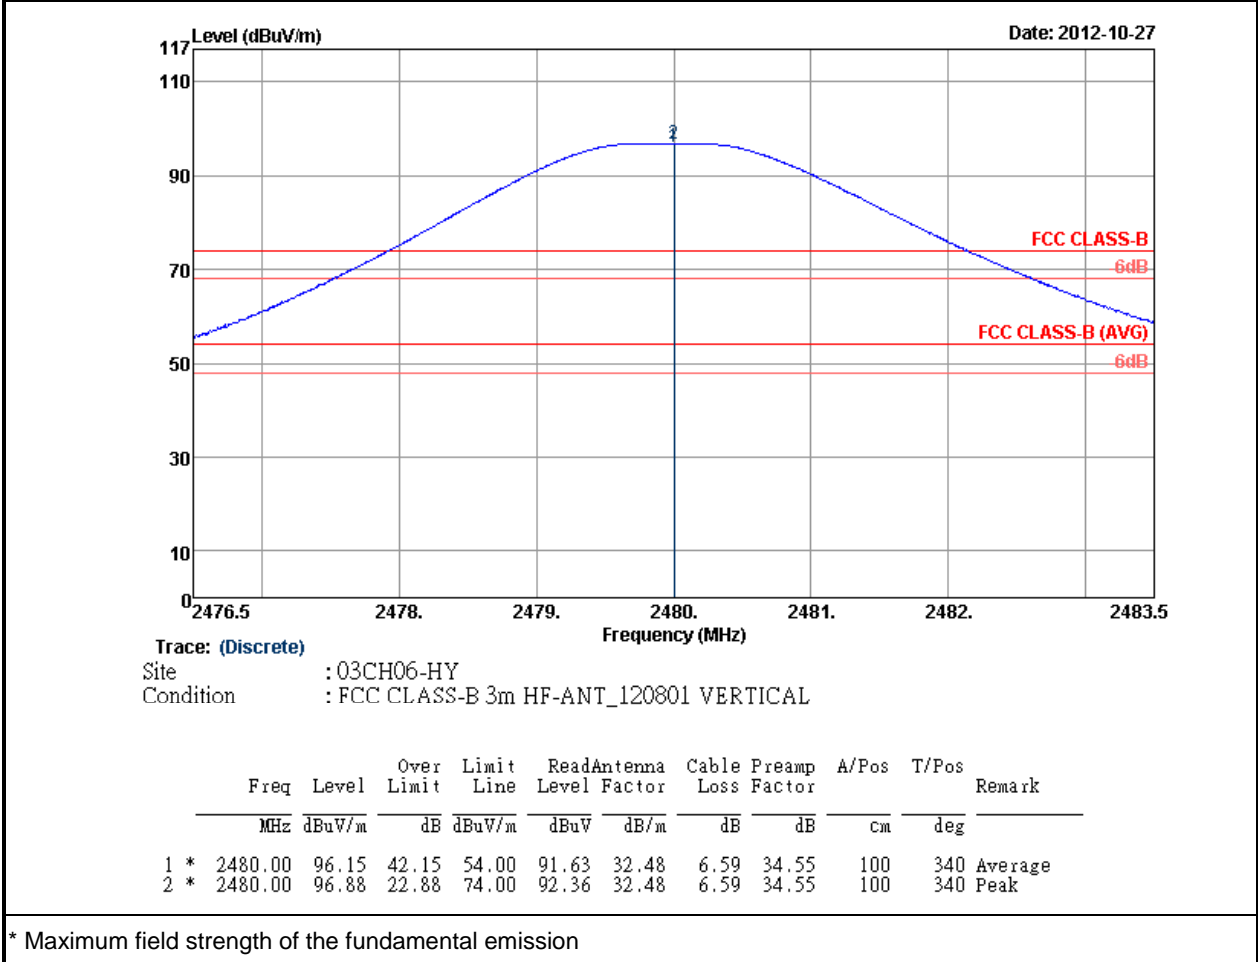



<b>Test Mode :</b>	Bluetooth Tx CH39_2480 MHz_1Mbps	<b>Temperature :</b>	23~24°C
<b>Test Engineer :</b>	Kai Wang, Ivan Chiang, and Timberland Lin	<b>Relative Humidity :</b>	42~43%
<b>Condition :</b>	3m	<b>Polarization :</b>	Vertical

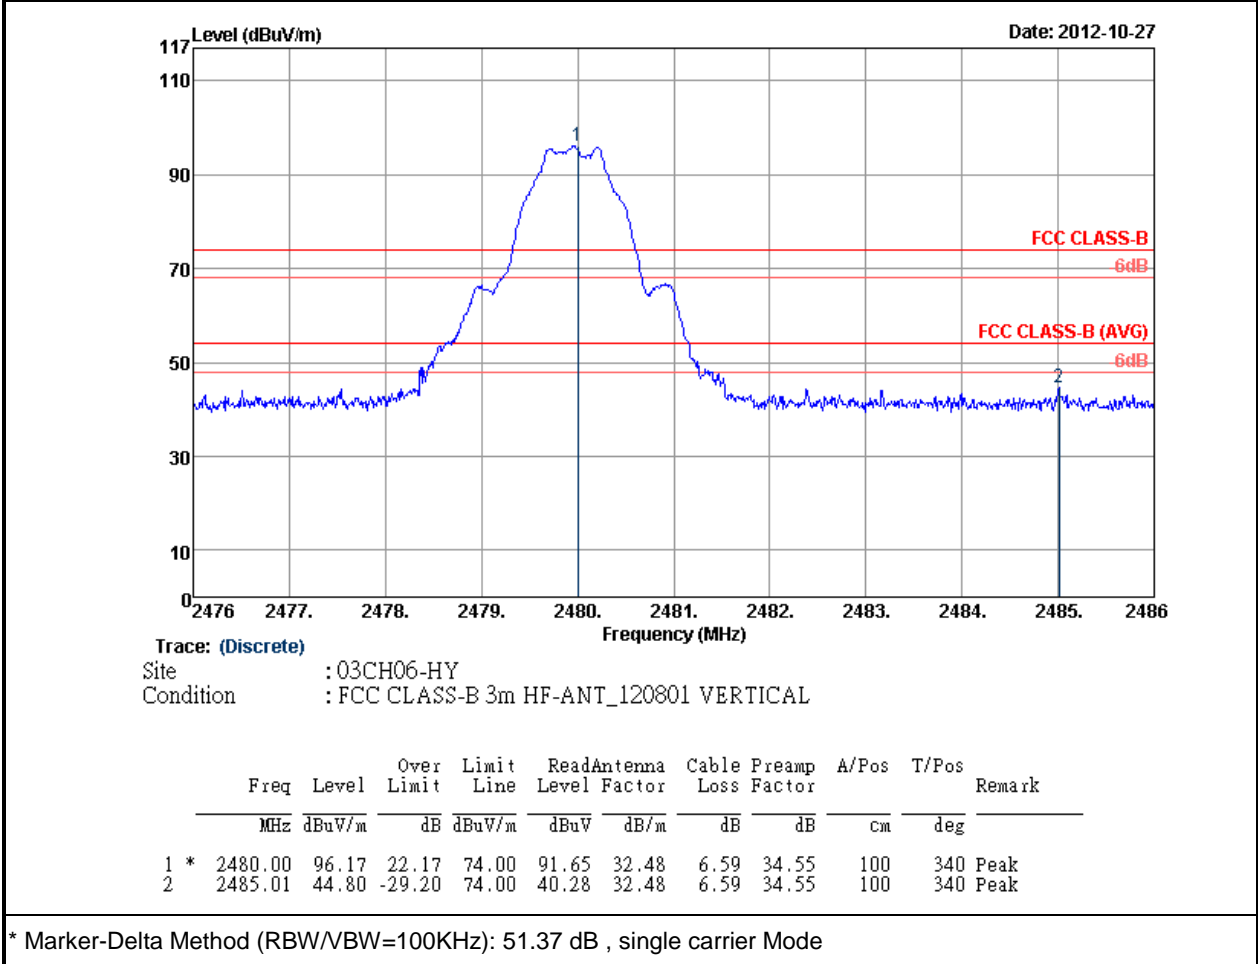



3.5.7 Test Result of Radiated Emission (30 MHz ~ 10<sup>th</sup> Harmonic)

<b>Test Mode :</b>	Mode 1	<b>Temperature :</b>	23~24°C
<b>Test Channel :</b>	00	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Kai Wang, Ivan Chiang, and Timberland Lin	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 2402 MHz is fundamental signal which can be ignored. 2. Test result of emissions which are 20 dB lower than the limit is not reported per15.31		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2402	104.01	-	-	99.76	32.36	6.45	34.56	140	91	Average
2402	104.8	-	-	100.55	32.36	6.45	34.56	140	91	Peak

<b>Test Mode :</b>	Mode 1	<b>Temperature :</b>	23~24°C
<b>Test Channel :</b>	00	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Kai Wang, Ivan Chiang, and Timberland Lin	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 2402 MHz is fundamental signal which can be ignored. 2. Test result of emissions which are 20 dB lower than the limit is not reported per15.31		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2402	96.23	-	-	91.98	32.36	6.45	34.56	100	226	Average
2402	96.84	-	-	92.59	32.36	6.45	34.56	100	226	Peak



<b>Test Mode :</b>	Mode 2	<b>Temperature :</b>	23~24°C
<b>Test Channel :</b>	19	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Kai Wang, Ivan Chiang, and Timberland Lin	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 2440 MHz is fundamental signal which can be ignored. 2. Test result of emissions which are 20 dB lower than the limit is not reported per15.31		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2440	104.21	-	-	99.82	32.43	6.52	34.56	195	74	Average
2440	104.9	-	-	100.51	32.43	6.52	34.56	195	74	Peak

<b>Test Mode :</b>	Mode 2	<b>Temperature :</b>	23~24°C
<b>Test Channel :</b>	19	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Kai Wang, Ivan Chiang, and Timberland Lin	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 2440 MHz is fundamental signal which can be ignored. 2. Test result of emissions which are 20 dB lower than the limit is not reported per15.31		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2440	96.26	-	-	91.87	32.43	6.52	34.56	100	341	Average
2440	96.86	-	-	92.47	32.43	6.52	34.56	100	341	Peak



<b>Test Mode :</b>	Mode 3	<b>Temperature :</b>	23~24°C
<b>Test Channel :</b>	39	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Kai Wang, Ivan Chiang, and Timberland Lin	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 2480 MHz is fundamental signal which can be ignored. 2. Test result of emissions which are 20 dB lower than the limit is not reported per15.31		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
30	21.72	-18.28	40	34.24	18.8	0.4	31.72	-	-	Peak
145.56	23.29	-20.21	43.5	42.84	10.7	1.45	31.7	-	-	Peak
254.64	29.29	-16.71	46	45.7	13.05	2.22	31.68	100	25	Peak
319.6	18.76	-27.24	46	34.45	13.6	2.32	31.61	-	-	Peak
676.6	21.39	-24.61	46	30.79	19.1	3.49	31.99	-	-	Peak
918.1	23.97	-22.03	46	30.91	20.7	3.78	31.42	-	-	Peak
2480	103.94	-	-	99.42	32.48	6.59	34.55	194	73	Average
2480	104.7	-	-	100.18	32.48	6.59	34.55	194	73	Peak



<b>Test Mode :</b>	Mode 3	<b>Temperature :</b>	23~24°C
<b>Test Channel :</b>	39	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Kai Wang, Ivan Chiang, and Timberland Lin	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 2480 MHz is fundamental signal which can be ignored. 2. Test result of emissions which are 20 dB lower than the limit is not reported per15.31		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
30.27	26.8	-13.2	40	38.81	18.9	0.64	31.55	-	-	Peak
51.6	26.87	-13.13	40	49.91	7.88	0.81	31.73	100	248	Peak
291.09	23.87	-22.13	46	40.1	13.02	1.87	31.12	-	-	Peak
317.5	21.12	-24.88	46	36.84	13.57	2.33	31.62	-	-	Peak
681.5	22.87	-23.13	46	32.31	19.06	3.5	32	-	-	Peak
944	25.1	-20.9	46	31.62	20.84	3.82	31.18	-	-	Peak
2482	96.15	-	-	91.63	32.48	6.59	34.55	100	340	Average
2482	96.76	-	-	92.24	32.48	6.59	34.55	100	340	Peak

### 3.6 AC Conducted Emission Measurement

#### 3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


#### 3.6.2 Measuring Instruments

See list of measuring instruments of this test report.

#### 3.6.3 Test Procedures


1. The testing follows the guidelines in ANSI C63.10-2009 and ANSI C63.4-2003 test site requirement.
2. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN).
4. All the support units are connecting to the other LISN.
5. The LISN provides 50 ohm coupling impedance for the measuring instrument.
6. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
7. Both sides of AC line were checked for maximum conducted interference.
8. The frequency range from 150 kHz to 30 MHz was searched.
9. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

### 3.6.4 Test Setup

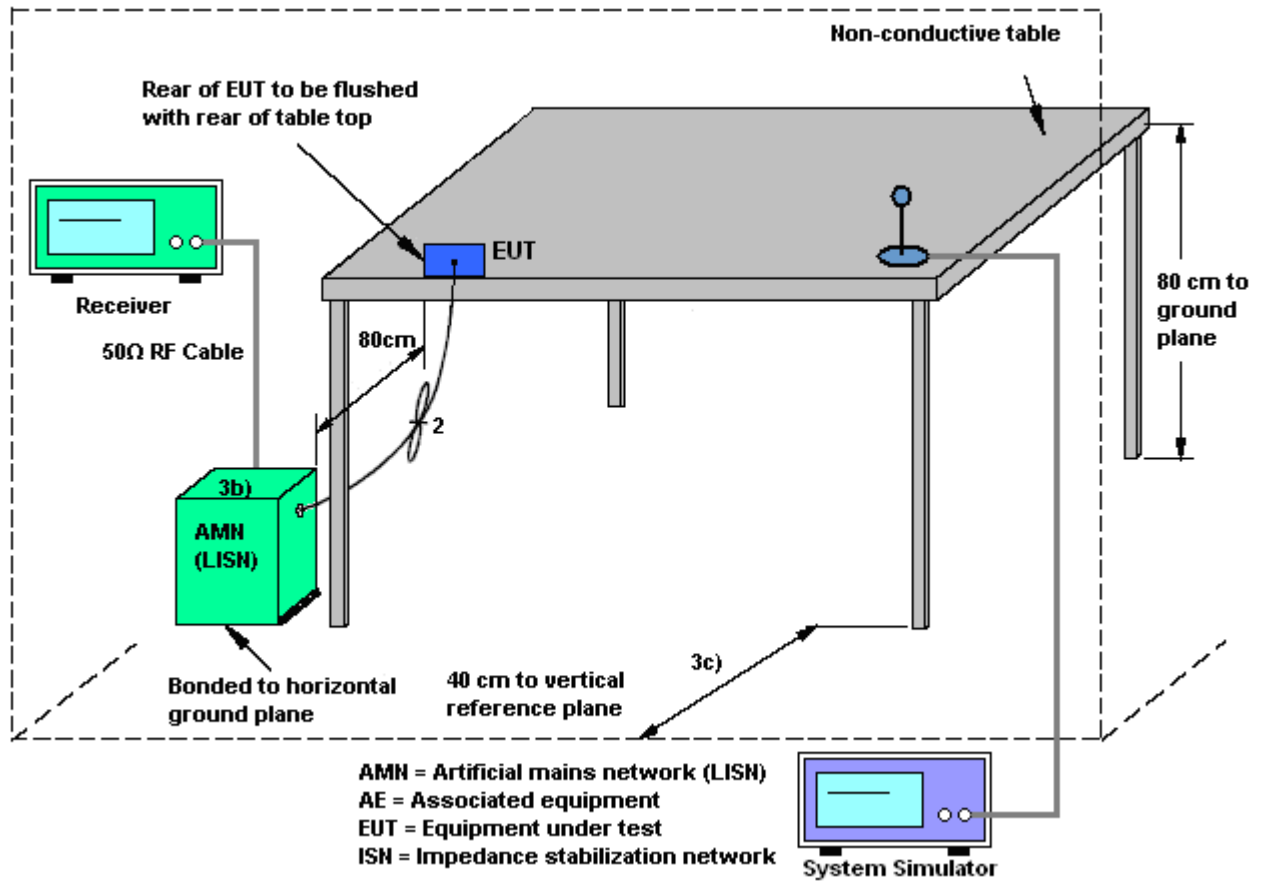

3.6.5 Test Result of AC Conducted Emission


Test Mode :	Mode 1	Temperature :	20~22°C
Test Engineer :	Slash Huang	Relative Humidity :	45~47%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GSM850 Idle + Bluetooth Link + WLAN (2.4G) Link + Earphone + MP3 + Adapter		
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

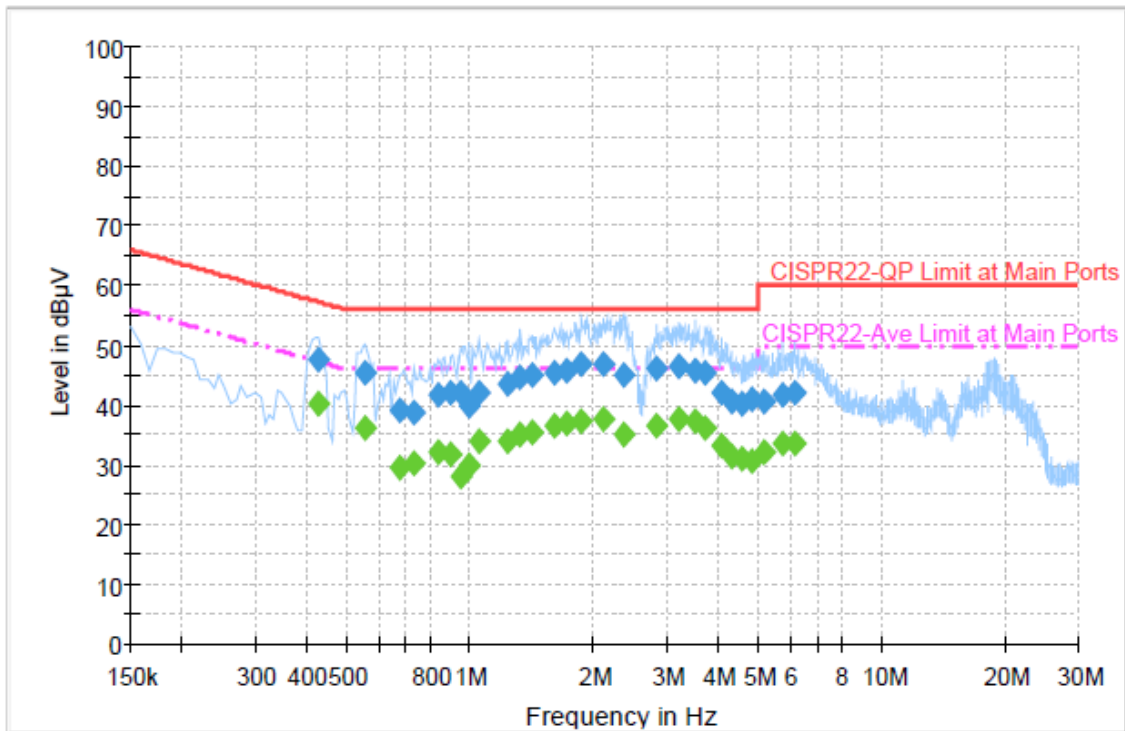

Final Result : Quasi-Peak

Frequency (MHz)	Quasi-Peak (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.430000	47.5	Off	L1	19.4	9.8	57.3
0.558000	45.5	Off	L1	19.4	10.5	56.0
0.678000	39.0	Off	L1	19.5	17.0	56.0
0.734000	38.8	Off	L1	19.4	17.2	56.0
0.838000	41.6	Off	L1	19.5	14.4	56.0
0.902000	41.9	Off	L1	19.4	14.1	56.0
0.950000	41.9	Off	L1	19.4	14.1	56.0
0.998000	39.8	Off	L1	19.4	16.2	56.0
1.054000	42.1	Off	L1	19.4	13.9	56.0
1.238000	43.7	Off	L1	19.5	12.3	56.0
1.326000	44.5	Off	L1	19.5	11.5	56.0
1.422000	45.0	Off	L1	19.4	11.0	56.0
1.598000	45.3	Off	L1	19.5	10.7	56.0
1.710000	45.9	Off	L1	19.5	10.1	56.0
1.870000	46.8	Off	L1	19.5	9.2	56.0


Test Mode :	Mode 1	Temperature :	20~22°C
Test Engineer :	Slash Huang	Relative Humidity :	45~47%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GSM850 Idle + Bluetooth Link + WLAN (2.4G) Link + Earphone + MP3 + Adapter		
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

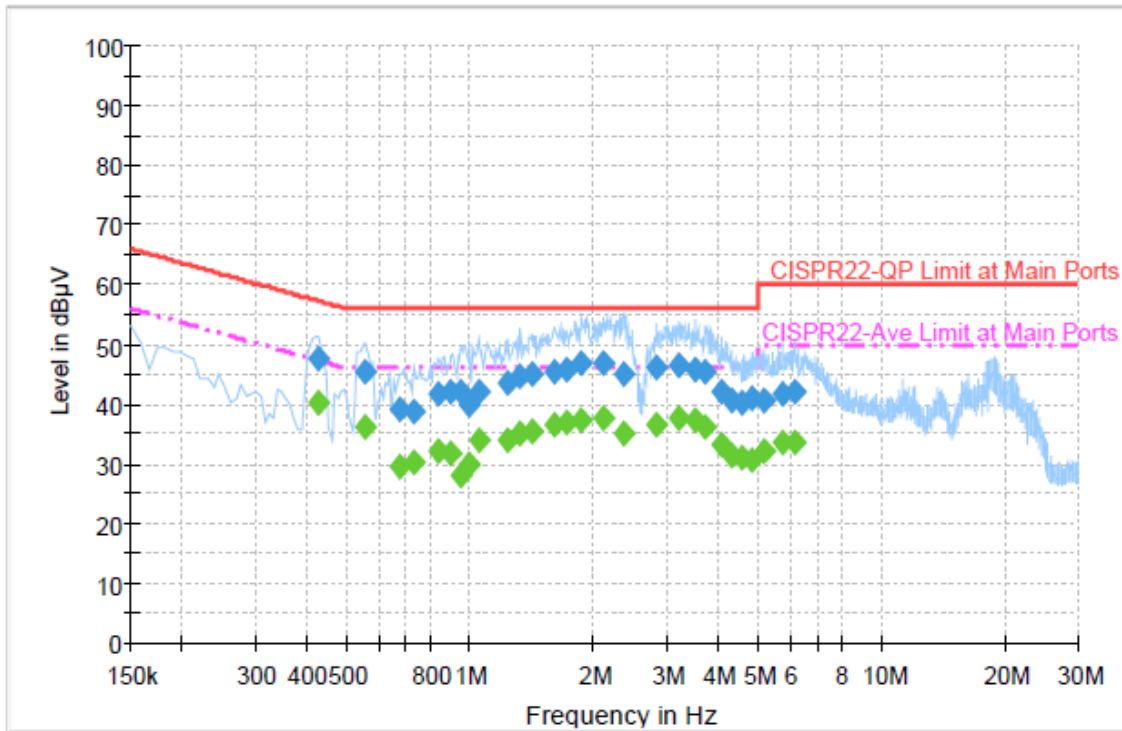

Final Result : Quasi-Peak

Frequency (MHz)	Quasi-Peak (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
2.110000	46.8	Off	L1	19.5	9.2	56.0
2.358000	44.9	Off	L1	19.6	11.1	56.0
2.838000	46.0	Off	L1	19.6	10.0	56.0
3.206000	46.5	Off	L1	19.6	9.5	56.0
3.534000	45.7	Off	L1	19.6	10.3	56.0
3.718000	45.4	Off	L1	19.6	10.6	56.0
4.094000	42.1	Off	L1	19.6	13.9	56.0
4.326000	40.6	Off	L1	19.6	15.4	56.0
4.582000	40.3	Off	L1	19.7	15.7	56.0
4.838000	40.9	Off	L1	19.6	15.1	56.0
5.198000	40.6	Off	L1	19.5	19.4	60.0
5.758000	41.7	Off	L1	19.6	18.3	60.0
6.182000	42.0	Off	L1	19.6	18.0	60.0


Test Mode :	Mode 1	Temperature :	20~22°C
Test Engineer :	Slash Huang	Relative Humidity :	45~47%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GSM850 Idle + Bluetooth Link + WLAN (2.4G) Link + Earphone + MP3 + Adapter		
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

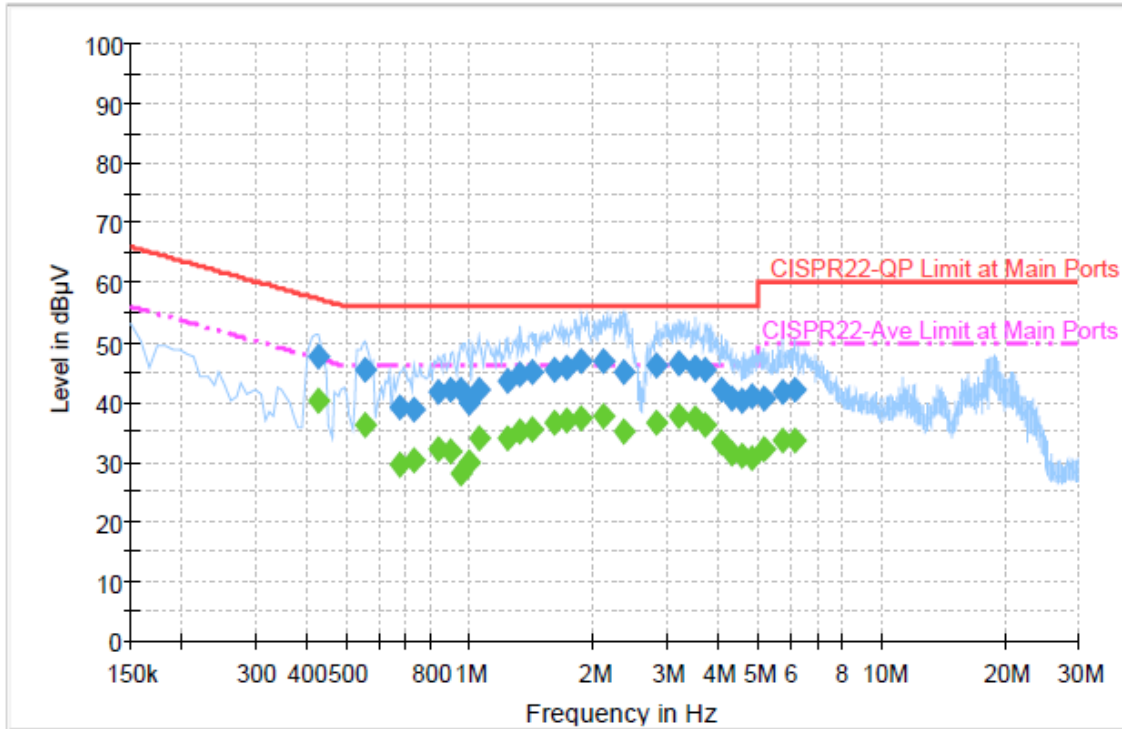

Final Result : Average

Frequency (MHz)	Average (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.430000	40.1	Off	L1	19.4	7.2	47.3
0.558000	36.2	Off	L1	19.4	9.8	46.0
0.678000	29.4	Off	L1	19.5	16.6	46.0
0.734000	30.2	Off	L1	19.4	15.8	46.0
0.838000	32.0	Off	L1	19.5	14.0	46.0
0.902000	31.7	Off	L1	19.4	14.3	46.0
0.950000	28.1	Off	L1	19.4	17.9	46.0
0.998000	29.8	Off	L1	19.4	16.2	46.0
1.054000	33.9	Off	L1	19.4	12.1	46.0
1.238000	34.0	Off	L1	19.5	12.0	46.0
1.326000	35.1	Off	L1	19.5	10.9	46.0
1.422000	35.3	Off	L1	19.4	10.7	46.0
1.598000	36.5	Off	L1	19.5	9.5	46.0
1.710000	36.9	Off	L1	19.5	9.1	46.0
1.870000	37.2	Off	L1	19.5	8.8	46.0

Test Mode :	Mode 1	Temperature :	20~22°C
Test Engineer :	Slash Huang	Relative Humidity :	45~47%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GSM850 Idle + Bluetooth Link + WLAN (2.4G) Link + Earphone + MP3 + Adapter		
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

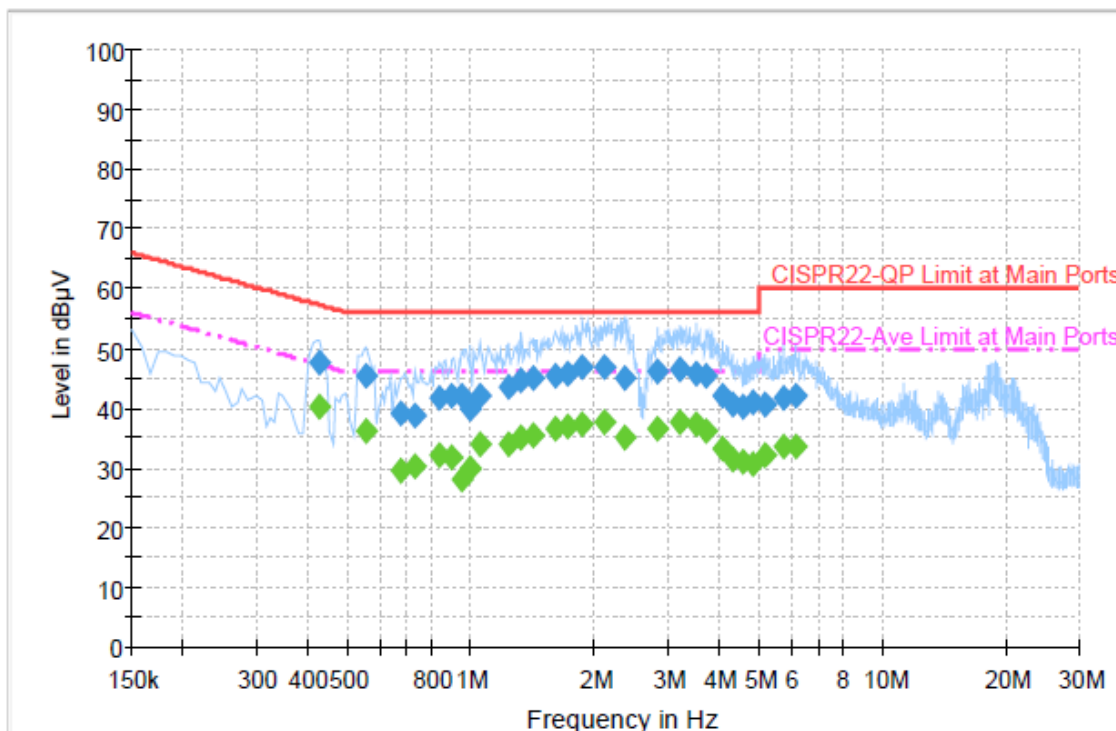


Final Result : Average

Frequency (MHz)	Average (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
2.110000	37.6	Off	L1	19.5	8.4	46.0
2.358000	35.2	Off	L1	19.6	10.8	46.0
2.838000	36.6	Off	L1	19.6	9.4	46.0
3.206000	37.5	Off	L1	19.6	8.5	46.0
3.534000	37.1	Off	L1	19.6	8.9	46.0
3.718000	36.1	Off	L1	19.6	9.9	46.0
4.094000	33.3	Off	L1	19.6	12.7	46.0
4.326000	31.2	Off	L1	19.6	14.8	46.0
4.582000	30.8	Off	L1	19.7	15.2	46.0
4.838000	30.7	Off	L1	19.6	15.3	46.0
5.198000	32.0	Off	L1	19.5	18.0	50.0
5.758000	33.5	Off	L1	19.6	16.5	50.0
6.182000	33.7	Off	L1	19.6	16.3	50.0




Test Mode :	Mode 1	Temperature :	20~22°C
Test Engineer :	Slash Huang	Relative Humidity :	45~47%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	GSM850 Idle + Bluetooth Link + WLAN (2.4G) Link + Earphone + MP3 + Adapter		
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

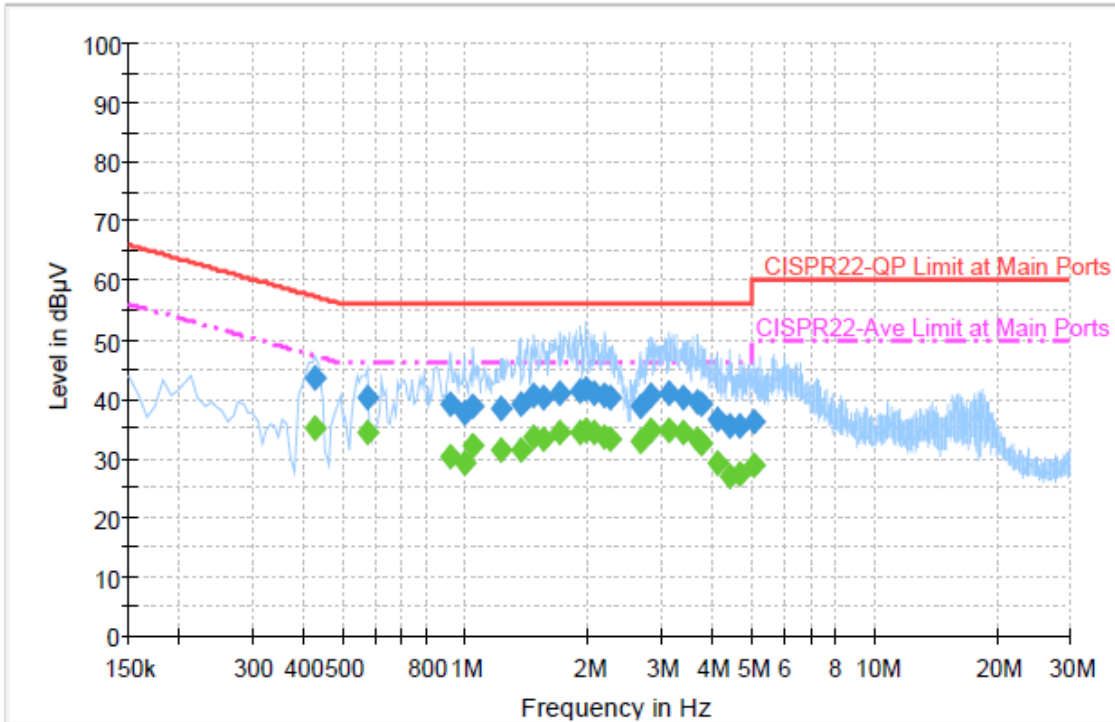

**Final Result : Quasi-Peak**

Frequency (MHz)	Quasi-Peak (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.430000	43.6	Off	N	19.4	13.7	57.3
0.574000	40.4	Off	N	19.4	15.6	56.0
0.918000	39.0	Off	N	19.4	17.0	56.0
0.990000	37.8	Off	N	19.4	18.2	56.0
1.046000	38.9	Off	N	19.5	17.1	56.0
1.214000	38.5	Off	N	19.5	17.5	56.0
1.366000	39.0	Off	N	19.5	17.0	56.0
1.470000	40.6	Off	N	19.5	15.4	56.0
1.550000	40.4	Off	N	19.4	15.6	56.0
1.702000	40.9	Off	N	19.5	15.1	56.0
1.902000	41.5	Off	N	19.5	14.5	56.0
1.966000	41.8	Off	N	19.5	14.2	56.0


Test Mode :	Mode 1	Temperature :	20~22°C
Test Engineer :	Slash Huang	Relative Humidity :	45~47%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	GSM850 Idle + Bluetooth Link + WLAN (2.4G) Link + Earphone + MP3 + Adapter		
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

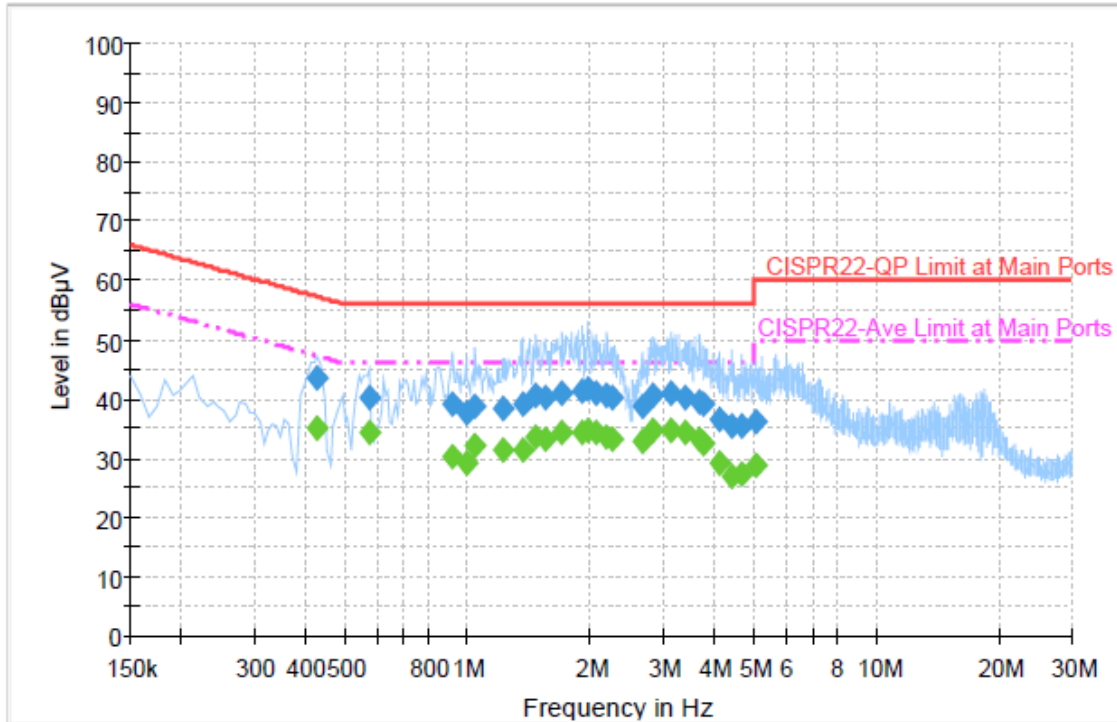

Final Result : Quasi-Peak

Frequency (MHz)	Quasi-Peak (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
2.054000	41.1	Off	N	19.6	14.9	56.0
2.190000	40.5	Off	N	19.6	15.5	56.0
2.270000	40.2	Off	N	19.6	15.8	56.0
2.670000	38.8	Off	N	19.6	17.2	56.0
2.830000	40.6	Off	N	19.6	15.4	56.0
3.158000	40.8	Off	N	19.6	15.2	56.0
3.414000	40.3	Off	N	19.6	15.7	56.0
3.702000	39.6	Off	N	19.6	16.4	56.0
3.782000	39.0	Off	N	19.6	17.0	56.0
4.110000	36.6	Off	N	19.6	19.4	56.0
4.430000	35.6	Off	N	19.6	20.4	56.0
4.670000	35.4	Off	N	19.6	20.6	56.0
5.086000	36.1	Off	N	19.6	23.9	60.0

Test Mode :	Mode 1	Temperature :	20~22°C
Test Engineer :	Slash Huang	Relative Humidity :	45~47%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	GSM850 Idle + Bluetooth Link + WLAN (2.4G) Link + Earphone + MP3 + Adapter		
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

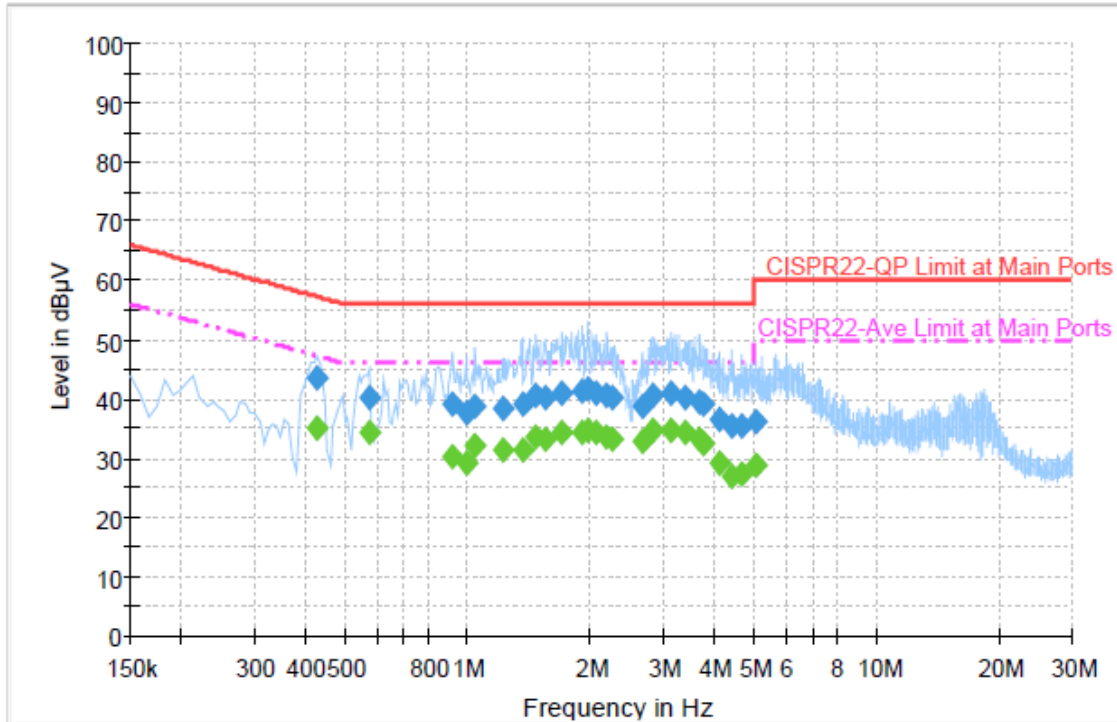


Final Result : Average

Frequency (MHz)	Average (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.430000	35.1	Off	N	19.4	12.2	47.3
0.574000	34.2	Off	N	19.4	11.8	46.0
0.918000	30.1	Off	N	19.4	15.9	46.0
0.990000	29.0	Off	N	19.4	17.0	46.0
1.046000	32.2	Off	N	19.5	13.8	46.0
1.214000	31.2	Off	N	19.5	14.8	46.0
1.366000	31.3	Off	N	19.5	14.7	46.0
1.470000	33.6	Off	N	19.5	12.4	46.0
1.550000	33.3	Off	N	19.4	12.7	46.0
1.702000	34.3	Off	N	19.5	11.7	46.0
1.902000	34.5	Off	N	19.5	11.5	46.0
1.966000	34.8	Off	N	19.5	11.2	46.0



Test Mode :	Mode 1	Temperature :	20~22°C
Test Engineer :	Slash Huang	Relative Humidity :	45~47%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	GSM850 Idle + Bluetooth Link + WLAN (2.4G) Link + Earphone + MP3 + Adapter		
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

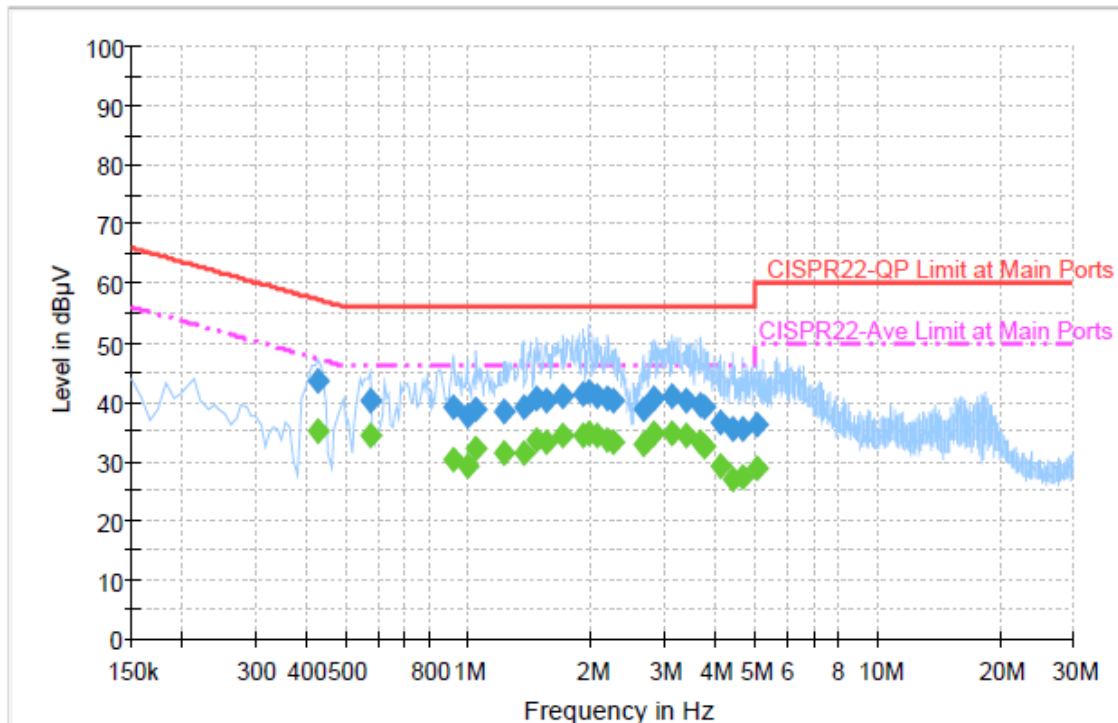

Final Result : Average

Frequency (MHz)	Average (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
2.054000	34.4	Off	N	19.6	11.6	46.0
2.190000	33.6	Off	N	19.6	12.4	46.0
2.270000	33.2	Off	N	19.6	12.8	46.0
2.670000	32.8	Off	N	19.6	13.2	46.0
2.830000	34.6	Off	N	19.6	11.4	46.0
3.158000	34.7	Off	N	19.6	11.3	46.0
3.414000	34.4	Off	N	19.6	11.6	46.0
3.702000	33.0	Off	N	19.6	13.0	46.0
3.782000	32.3	Off	N	19.6	13.7	46.0
4.110000	29.0	Off	N	19.6	17.0	46.0
4.430000	27.1	Off	N	19.6	18.9	46.0
4.670000	27.2	Off	N	19.6	18.8	46.0
5.086000	28.8	Off	N	19.6	21.2	50.0



## **3.7 Antenna Requirements**

### **3.7.1 Standard Applicable**

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

### **3.7.2 Antenna Connected Construction**

Non-standard connector used.

### **3.7.3 Antenna Gain**

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSP40	100055	9kHz~40GHz	Jun. 06, 2012	Oct. 17, 2012	Jun. 05, 2013	Conducted (TH02-HY)
Spectrum Analyzer	Agilent	E4408B	MY442110 30	9KHz ~ 26.5GHz	Nov. 23, 2011	Oct. 25, 2012~ Oct. 27, 2012	Nov. 22, 2012	Radiation (03CH06-HY)
Spectrum Analyzer	R&S	FSP30	101352	9KHz-30GHz	Nov. 03, 2011	Oct. 25, 2012~ Oct. 27, 2012	Nov. 02, 2012	Radiation (03CH06-HY)
EMI Test Receiver	R&S	ESVS10	834468/00 3	20MHz ~ 1000MHz	May 04, 2012	Oct. 25, 2012~ Oct. 27, 2012	May. 03, 2013	Radiation (03CH06-HY)
Bilog Antenna	SCHAFFNER	CBL6112B	2885	30MHz ~ 2GHz	Oct. 06, 2012	Oct. 25, 2012~ Oct. 27, 2012	Oct. 05, 2013	Radiation (03CH06-HY)
Double Ridge Horn Antenna	EMCO	3117	00066583	1GHz ~ 18GHz	Aug. 01, 2012	Oct. 25, 2012~ Oct. 27, 2012	Jul. 31, 2013	Radiation (03CH06-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170 251	15GHz ~ 40GHz	Sep. 28, 2012	Oct. 25, 2012~ Oct. 27, 2012	Sep. 27, 2013	Radiation (03CH06-HY)
Preamplifier	Agilent	8449B	3008A019 17	1GHz ~ 26.5GHz	Apr. 13, 2012	Oct. 25, 2012~ Oct. 27, 2012	Apr. 12, 2013	Radiation (03CH06-HY)
Amplifier	Agilent	310N	186713	9KHz ~ 1GHz	Apr. 11, 2012	Oct. 25, 2012~ Oct. 27, 2012	Apr. 10, 2013	Radiation (03CH06-HY)
Pre Amplifier	EMCI	EMC051845	SN980048	1GHz ~ 18GHz	Jul. 21, 2012	Oct. 25, 2012~ Oct. 27, 2012	Jul. 20, 2013	Radiation (03CH06-HY)
Pre Amplifier	MITEQ	AMF-7D-0010 1800-30-10P	159087	1GHz~18GHz	Feb. 27, 2012	Oct. 25, 2012~ Oct. 27, 2012	Feb. 26, 2013	Radiation (03CH06-HY)
Loop Antenna	R&S	HFH2-Z2	860004/00 1	9KHz ~ 30MHz	Jul. 03, 2012	Oct. 25, 2012~ Oct. 27, 2012	Jul. 02, 2014	Radiation (03CH06-HY)
EMI Test Receiver	R&S	ESCS 30	100356	9KHz ~ 2.75GHz	Oct. 27, 2011	Oct. 17, 2012	Oct. 26, 2012	Conduction (CO05-HY)
Two-LISN	R&S	ENV216	11-100081	9KHz ~ 30MHz	Dec. 09, 2011	Oct. 17, 2012	Dec. 08, 2012	Conduction (CO05-HY)
Two-LISN	R&S	ENV216	11-100080	9KHz ~ 30MHz	Dec. 06, 2011	Oct. 17, 2012	Dec. 05, 2012	Conduction (CO05-HY)
AC Power Source	APC	APC-1000W	N/A	N/A	N/A	Oct. 17, 2012	N/A	Conduction (CO05-HY)
System Simulator	R&S	CMU200	117591	N/A	Oct. 21, 2011	Oct. 17, 2012	Oct. 20, 2013	Conduction (CO05-HY)



## 5 Uncertainty of Evaluation

### Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	2.26
---	------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	2.54
---	------

### Uncertainty of Radiated Emission Measurement (1 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	4.72
---	------