



# PCTEST ENGINEERING LABORATORY, INC.

6660-B Dobbin Road, Columbia, MD 21045 USA  
Tel. 410.290.6652 / Fax 410.290.6654  
http://www.pctestlab.com



## MEASUREMENT REPORT FCC PART 15.407 / IC RSS-210 802.11a/n (UNII)

**Applicant Name:**  
Samsung Electronics, Co. Ltd.  
18600 Broadwick St.  
Rancho Dominguez, CA 90220  
United States

**Date of Testing:**  
October 26 - 28, 2011  
**Test Site/Location:**  
PCTEST Lab, Columbia, MD, USA  
**Test Report Serial No.:**  
0Y1110181834.A3L

<b>FCC ID:</b>	<b>A3LSWDSC04D</b>
<b>APPLICANT:</b>	<b>Samsung Electronics, Co. Ltd.</b>

**Application Type:** Certification  
**Model(s):** SC-04D  
**EUT Type:** Portable Handset  
**Max. RF Output Power:** 15.78 mW (11.98 dBm) Conducted (802.11a UNII Band 1)  
14.89 mW (11.73 dBm) Conducted (802.11a UNII Band 2)  
16.48 mW (12.17 dBm) Conducted (802.11a UNII Band 3)  
12.13 mW (10.84 dBm) Conducted (802.11n UNII Band 1)  
11.56 mW (10.63 dBm) Conducted (802.11n UNII Band 2)  
12.82 mW (11.08 dBm) Conducted (802.11n UNII Band 3)  
**Frequency Range:** 5180MHz – 5240MHz (UNII Band 1), 5260MHz – 5320MHz (UNII Band 2),  
5500MHz – 5700MHz (UNII Band 3)  
**FCC Classification:** Unlicensed National Information Infrastructure (UNII)  
**FCC Rule Part(s):** Part 15.407  
**IC Specification(s):** RSS-210 Issue 8

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C-63.4-2003. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

*Grant Conditions: Listed output power is conducted.*

*PCTEST certifies that no party to this application has been subject to a denial of Federal benefits that includes FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C. 862.*



Randy Ortanez  
President



<b>FCC ID:</b> A3LSWDSC04D		<b>FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1110181834.A3L	<b>Test Dates:</b> October 26 - 28, 2011	<b>EUT Type:</b> Portable Handset	Page 1 of 73	

# TABLE OF CONTENTS

FCC PART 15.407 MEASUREMENT REPORT.....		3
1.0 INTRODUCTION.....		4
1.1 SCOPE.....		4
1.2 PCTEST TEST LOCATION.....		4
2.0 PRODUCT INFORMATION.....		5
2.1 EQUIPMENT DESCRIPTION.....		5
2.2 DEVICE CAPABILITIES.....		5
2.3 EMI SUPPRESSION DEVICE(S)/MODIFICATIONS.....		5
2.4 LABELING REQUIREMENTS.....		5
3.0 DESCRIPTION OF TEST.....		6
3.1 EVALUATION PROCEDURE.....		6
3.2 CONDUCTED EMISSIONS.....		6
3.3 RADIATED EMISSIONS.....		7
4.0 ANTENNA REQUIREMENTS.....		8
5.0 TEST EQUIPMENT CALIBRATION DATA.....		9
6.0 TEST RESULTS.....		10
6.1 SUMMARY.....		10
6.2 26DB BANDWIDTH MEASUREMENT.....		11
6.3 UNII BAND 1 OUTPUT POWER MEASUREMENT – 802.11A/N.....		21
6.4 UNII BAND 2 OUTPUT POWER MEASUREMENT – 802.11A/N.....		22
6.5 UNII BAND 3 OUTPUT POWER MEASUREMENT – 802.11A/N.....		23
6.6 PEAK POWER SPECTRAL DENSITY.....		24
6.7 PEAK EXCURSION RATIO.....		34
6.8 FREQUENCY STABILITY.....		44
6.9 RADIATED SPURIOUS EMISSION MEASUREMENTS.....		47
6.10 RADIATED BAND EDGE MEASUREMENTS.....		57
6.11 LINE-CONDUCTED TEST DATA.....		61
7.0 CONCLUSION.....		73

<b>FCC ID:</b> A3LSWDSC04D		<b>FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1110181834.A3L	<b>Test Dates:</b> October 26 - 28, 2011	<b>EUT Type:</b> Portable Handset	Page 2 of 73	



# MEASUREMENT REPORT

## FCC Part 15.407



### § 2.1033 General Information

**APPLICANT:** Samsung Electronics, Co. Ltd.

**APPLICANT ADDRESS:** 18600 Broadwick St.  
Rancho Dominguez, CA 90220, United States

**TEST SITE:** PCTEST ENGINEERING LABORATORY, INC.

**TEST SITE ADDRESS:** 6660-B Dobbin Road, Columbia, MD 21045 USA

**FCC RULE PART(S):** Part 15.407

**IC SPECIFICATION(S):** RSS-210 Issue 8

**MODEL NAME:** SC-04D

**FCC ID:** A3LSWDSC04D

**Test Device Serial No.:** FI-257-C       Production     Pre-Production     Engineering

**FCC CLASSIFICATION:** Unlicensed National Information Infrastructure (UNII)

**DATE(S) OF TEST:** October 26 - 28, 2011



**TEST REPORT S/N:** 0Y1110181834.A3L

### Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab located in Columbia, MD 21045, U.S.A.

- PCTEST facility is an FCC registered (PCTEST Reg. No. 90864) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules and Industry Canada (2451A-1).
- PCTEST Lab is accredited to ISO 17025 by U.S. National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP Lab code: 100431-0) in EMC, FCC and Telecommunications.
- PCTEST Lab is accredited to ISO 17025-2005 by the American Association for Laboratory Accreditation (A2LA) in Specific Absorption Rate (SAR) testing, Hearing Aid Compatibility (HAC) testing, CTIA Test Plans, and wireless testing for FCC and Industry Canada Rules.
- PCTEST Lab is a recognized U.S. Conformity Assessment Body (CAB) in EMC and R&TTE (n.b. 0982) under the U.S.-EU Mutual Recognition Agreement (MRA).
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC Guide 65 by the American National Standards Institute (ANSI) in all scopes of FCC Rules and Industry Canada Standards (RSS).
- PCTEST facility is an IC registered (2451A-1) test laboratory with the site description on file at Industry Canada.
- PCTEST is a CTIA Authorized Test Laboratory (CATL) for AMPS, CDMA, and EvDO wireless devices and for Over-the-Air (OTA) Antenna Performance testing for AMPS, CDMA, GSM, GPRS, EGPRS, UMTS (W-CDMA), CDMA 1xEVDO, and CDMA 1xRTT.



<b>FCC ID:</b> A3LSWDSC04D		<b>FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1110181834.A3L	<b>Test Dates:</b> October 26 - 28, 2011	<b>EUT Type:</b> Portable Handset	Page 3 of 73	

# 1.0 INTRODUCTION

## 1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

## 1.2 PCTEST Test Location

The map below shows the location of the PCTEST LABORATORY, its proximity to the FCC Laboratory, the Columbia vicinity area, the Baltimore-Washington Intern'l (BWI) airport, the city of Baltimore and the Washington, DC area. (see Figure 1-1).

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility in New Concept Business Park, Guilford Industrial Park, Columbia, Maryland. The site address is 6660-B Dobbin Road, Columbia, MD 21045. The test site is one of the highest points in the Columbia area with an elevation of 390 feet above mean sea level. The site coordinates are 39° 11'15" N latitude and 76° 49'38" W longitude. The facility is 1.5 miles North of the FCC laboratory, and the ambient signal and ambient signal strength are approximately equal to those of the FCC laboratory. There are no FM or TV transmitters within 15 miles of the site. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2003 on January 28, 2009.

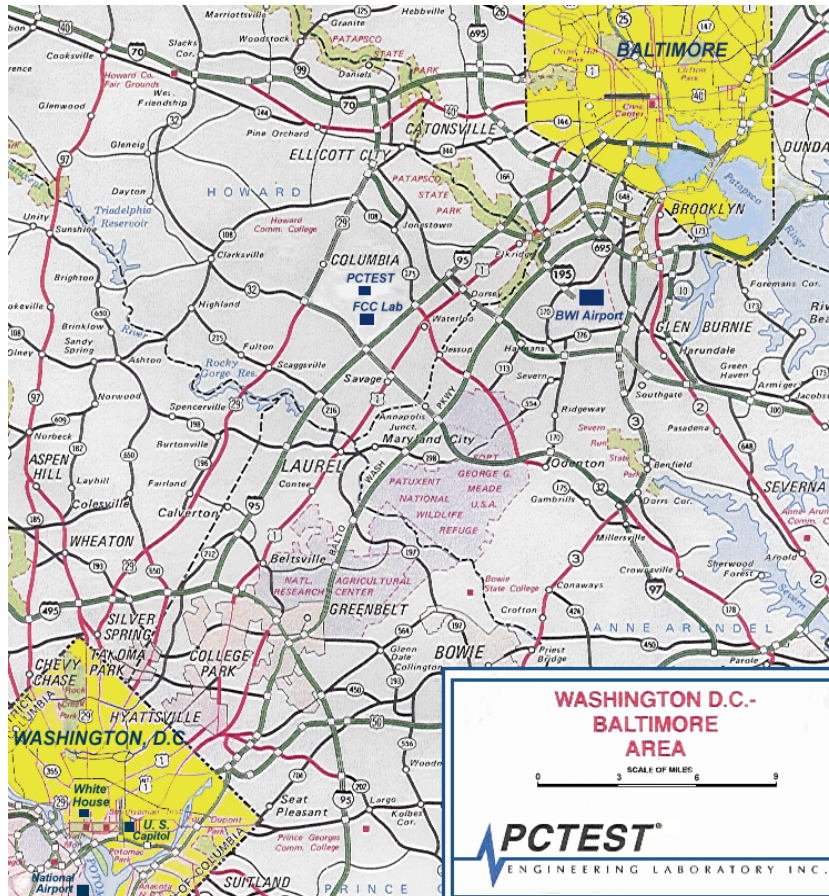


Figure 1-1. Map of the Greater Baltimore and Metropolitan Washington, D.C. area

FCC ID: A3LSWDSC04D		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1110181834.A3L	Test Dates: October 26 - 28, 2011	EUT Type: Portable Handset		Page 4 of 73

## 2.0 PRODUCT INFORMATION

### 2.1 Equipment Description

The Equipment Under Test (EUT) is the **Samsung Portable Handset FCC ID: A3LSWDSC04D**. The EUT consisted of the following component(s):

Manufacturer / Model	FCC ID	Description
Samsung / Model: SC-04D	A3LSWDSC04D	Portable Handset

**Table 2-1. EUT Equipment Description**

### 2.2 Device Capabilities

This device contains the following capabilities:

850/1900 GSM/GPRS/EDGE, 1700/1900 WCDMA/HSPA, 802.11a/b/g/n WLAN, 802.11a/n UNII, Bluetooth, NFC

### 2.3 EMI Suppression Device(s)/Modifications



No EMI suppression device(s) were added and/or no modifications were made during testing.

### 2.4 Labeling Requirements

Per 2.1074 & 15.19; Docket 95-19

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase. However, when the device is so small wherein placement of the label with specified statement is not practical, only the trade name and FCC ID must be displayed on the device per Section 15.19(b)(2).

Please see attachment for FCC ID label and label location.

FCC ID: A3LSWDSC04D		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1110181834.A3L	Test Dates: October 26 - 28, 2011	EUT Type: Portable Handset	Page 5 of 73	


## 3.0 DESCRIPTION OF TEST

### 3.1 Evaluation Procedure


The measurement procedure described in the American National Standard for Methods of Measurement of Radio-Noise Emission from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40GHz (ANSI C63.4-2003) and FCC Public Notice DA 02-2138 dated August 30, 2002 entitled "Measurement Procedure Updated for Peak Transmit Power in the Unlicensed National Information Infrastructure (U-NII) Bands" were used in the measurement of **Samsung Portable Handset FCC ID: A3LSWDSC04D**.

Deviation from measurement procedure.....None


### 3.2 Conducted Emissions

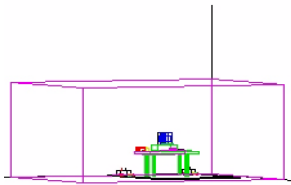


**Figure 3-1. Shielded Enclosure Line-Conducted Test Facility**

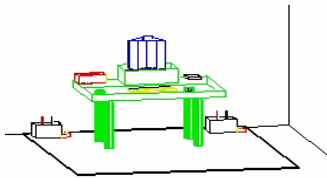

**Figure 3-2. Line Conducted Emission Test Set-Up**



**Figure 3-3. Wooden Table & Bonded LISNs**

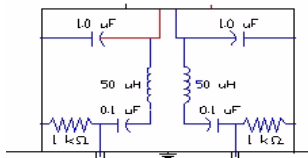

**Figure 3-4. LISN Schematic Diagram**

The line-conducted facility is located inside a 16'x20'x10' shielded enclosure, manufactured by Ray Proof Series 81 (see Figure 3-1). The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-5. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 1.5m away from the sidewall of the shielded room (see Figure 3-2). Solar Electronics and EMCO Model 3725/2 (10kHz-30MHz) 50Ω/50μH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room (see Figure 3-3). The EUT is powered from the Solar LISN and the support equipment is powered from the EMCO LISN. Power to the LISNs are filtered by a high-current high-insertion loss Ray Proof power line filter (100dB 14Hz-10GHz). The purpose of the filter is to attenuate ambient signal interference and this filter is also bonded to the shielded enclosure. All electrical cables are shielded by braided tinned copper zipper tubing with an inner diameter of ½". If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the Solar LISN. The LISN schematic diagram is shown (see Figure 3-4). All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion). Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer to determine the frequency producing the maximum EME from the EUT.

The spectrum was scanned from 150kHz to 30MHz with a spectrum analyzer. The detector function was set to CISPR quasi-peak and average mode. The bandwidth of the analyzer was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each EME emission. Each emission was maximized by: switching power lines; varying the mode of operation or resolution; clock or data exchange speed; scrolling H pattern to the EUT and/or support equipment, and powering the monitor from the floor mounted outlet box and the computer aux AC outlet, if applicable; whichever determined the worst-case emission. Photographs of the worst-case emission can be seen in the test setup photographs. Each EME reported was calibrated using the Agilent E8257D (250kHz – 20GHz) PSG Signal Generator.

<b>FCC ID:</b> A3LSWDSC04D		<b>FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)</b>	
<b>Test Report S/N:</b> 0Y1110181834.A3L	<b>Test Dates:</b> October 26 - 28, 2011	<b>EUT Type:</b> Portable Handset	<b>Reviewed by:</b> Quality Manager
			Page 6 of 73

### 3.3 Radiated Emissions



**Figure 3-5. 3-Meter Test Site**



**Figure 3-6. Dimensions of Outdoor Test Site**



**Figure 3-7. Turntable and System Setup**



**Figure 3-8. Normalized Site Attenuation Curves (H&V)**

Preliminary measurements were made indoors at 1-meter using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequency producing the maximum EME. Appropriate precaution was taken to ensure that all EME from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, and turntable azimuth with respect to the antenna was noted for each frequency found. The spectrum was scanned from 30 to 200 MHz using a bi-conical antenna and from 200 to 1000 MHz using a log-spiral antenna. Above 1 GHz, linearly polarized double ridge horn antennas were used.

Final measurements were made outdoors at 3-meter test range using Roberts™ Dipole antennas or horn antennas (see Figure 3-5). The test equipment was placed on a wooden and plastic bench situated on a 1.5m x 2m area adjacent to the measurement area (see Figure 3-6). Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The detector function was set to CISPR quasi-peak mode and the bandwidth of the spectrum analyzer was set to 100kHz for frequencies below 1GHz or 1MHz for frequencies above 1GHz. Above 1GHz the detector function was set to average mode (RBW = 1MHz, VBW = 10Hz).

The half-wave dipole antenna was tuned to the frequency found during preliminary radiated measurements. The EUT, support equipment and interconnecting cables were re-configured to the set-up producing the maximum emission for the frequency and were placed on top of a 0.8-meter high non-metallic 1 x 1.5 meter table (see Figure 3-7). The EUT, support equipment, and interconnecting cables were re-arranged and manipulated to maximize each EME emission. The turntable containing the system was rotated and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by: varying the mode of operation or resolution; clock or data exchange speed; scrolling H pattern to the EUT and/or support equipment, and powering the monitor from the floor mounted outlet box and the computer aux AC outlet, if applicable; and changing the polarity of the antenna, whichever determined the worst-case emission. Photographs of the worst-case emission can be seen in the test setup photographs. Each EME reported was calibrated using the Agilent E8257D (250kHz – 20GHz) PSG Signal Generator. The Theoretical Normalized Site Attenuation Curves for both horizontal and vertical polarization are shown in Figure 3-8.

FCC ID: A3LSWDSC04D		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1110181834.A3L	Test Dates: October 26 - 28, 2011	EUT Type: Portable Handset		Page 7 of 73

## 4.0 ANTENNA REQUIREMENTS

**Excerpt from §15.203 of the FCC Rules/Regulations:**

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antennas of the Portable Handset are **permanently attached**.
- There are no provisions for connection to an external antenna.

**Conclusion:**



The **Samsung Portable Handset FCC ID: A3LSWDSC04D** unit complies with the requirement of §15.203.

Band 1		Band 2		Band 3	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
36	5180	52	5260	100	5500
:	:	:	:	:	:
42	5210	56	5280	120	5600
:	:	:	:	:	:
48	5240	64	5320	140	5700

**Table 4-1. 802.11a Frequency / Channel Operations**

Band 1		Band 2		Band 3	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
36	5180	52	5260	100	5500
:	:	:	:	:	:
42	5210	56	5280	120	5600
:	:	:	:	:	:
48	5240	64	5320	140	5700

**Table 4-2. 802.11n Frequency / Channel Operations**



<b>FCC ID:</b> A3LSWDSC04D		<b>FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1110181834.A3L	<b>Test Dates:</b> October 26 - 28, 2011	<b>EUT Type:</b> Portable Handset		Page 8 of 73

## 5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST).

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	No.165	(30MHz - 1000MHz) RG58 Coax Cable	N/A		N/A	N/A
-	No.166	(1000-26500MHz) Microwave RF Cable	N/A		N/A	N/A
-	No.167	(100kHz - 100MHz) RG58 Coax Cable	N/A		N/A	N/A
Agilent	8447D	Broadband Amplifier	3/17/2011	Annual	3/17/2012	1937A03348
Agilent	8447D	Broadband Amplifier	3/17/2011	Annual	3/17/2012	2443A01900
Agilent	8449B	(1-26.5GHz) Pre-Amplifier	2/8/2011	Annual	2/8/2012	3008A00985
Agilent	85650A	Quasi-Peak Adapter	4/7/2011	Annual	4/7/2012	3303A01872
Agilent	85650A	Quasi-Peak Adapter	4/7/2011	Annual	4/7/2012	2043A00301
Agilent	8566B	(100Hz-22GHz) Spectrum Analyzer	4/7/2011	Annual	4/7/2012	2618A02866
Agilent	8566B	(100Hz-22GHz) Spectrum Analyzer	4/7/2011	Annual	4/7/2012	2542A11898
Agilent	8566B	(100Hz-22GHz) Spectrum Analyzer	4/7/2011	Annual	4/7/2012	3638A08713
Agilent	E4407B	ESA Spectrum Analyzer	4/5/2011	Annual	4/5/2012	US39210313
Agilent	E4448A	PSA (3Hz-50GHz) Spectrum Analyzer	11/30/2010	Annual	11/30/2011	US42510244
Agilent	E8257D	(250kHz-20GHz) Signal Generator	4/8/2011	Annual	4/8/2012	MY45470194
Agilent	N9020A	MXA Signal Analyzer	10/10/2011	Annual	10/10/2012	US46470561
Agilent	N9038A	MXE EMI Receiver	8/5/2011	Annual	8/5/2012	MY51210133
Anritsu	MA2411B	Pulse Sensor	10/13/2011	Annual	10/13/2012	1027293
Anritsu	ML2495A	Power Meter	10/13/2011	Annual	10/13/2012	1039008
Emco	3115	Horn Antenna (1-18GHz)	4/8/2010	Biennial	4/8/2012	9205-3874
Emco	3116	Horn Antenna (18 - 40GHz)	11/9/2008	Triennial	11/9/2011	9203-2178
Emco	3816/2	LISN	11/5/2010	Biennial	11/5/2012	9707-1077
Emco	3816/2	LISN	11/3/2010	Biennial	11/3/2012	9707-1079
Gigatronics	80701A	(0.05-18GHz) Power Sensor	10/12/2011	Annual	10/12/2012	1833460
Gigatronics	8651A	Universal Power Meter	10/12/2011	Annual	10/12/2012	8650319
MiniCircuits	VHF-3100+	High Pass Filter	N/A		N/A	30721
Sunol	DRH-118	Horn Antenna (1 - 18GHz)	7/5/2011	Biennial	7/5/2013	A050307
Sunol	JB5	Bi-Log Antenna (30M - 5GHz)	12/17/2009	Biennial	12/17/2011	A051107

**Table 5-1. Annual Test Equipment Calibration Schedule**

FCC ID: A3LSWDSC04D		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1110181834.A3L	Test Dates: October 26 - 28, 2011	EUT Type: Portable Handset	Page 9 of 73	

## 6.0 TEST RESULTS

### 6.1 Summary



Company Name: Samsung Electronics, Co. Ltd.  
 FCC ID: A3LSWDSC04D  
 Method/System: Unlicensed National Information Infrastructure (UNII)  
 Data Rate(s) Tested: 6, 9, 12, 18, 24, 36, 48, 54Mbps (802.11a)  
6.5/7.2, 13/14.4, 19.5/21.7, 26/28.9, 39/43.3, 52/57.8, 58.5/65, 65/72.2 (n)

FCC Part Section(s)	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
<b>TRANSMITTER MODE (TX)</b>						
N/A	RSS-210 [A9.2]	26dB Bandwidth [FCC] Occupied Bandwidth [IC]	N/A	CONDUCTED	PASS	Section 6.2
15.407 (a)(1)	RSS-210 [A9.2]	Maximum Conducted Output Power	< 4 + 10log <sub>10</sub> (BW) dBm (5150-5250MHz) [FCC] < 10 + 10log <sub>10</sub> (BW) dBm (5150-5250MHz) [IC] < 11 + 10log <sub>10</sub> (B) dBm (5250-5350MHz) < 11 + 10log <sub>10</sub> (B) dBm (5470 – 5725MHz)		PASS	Section 6.3, 6.4, 6.5
15.407 (a)(1), (5)	RSS-210 [A9.2]	Peak Power Spectral Density	< 4 dBm/MHz (5150-5250) [FCC] < 10dBm/MHz (5150-5250) [IC] < 11dBm/MHz (5250-5350) < 11dBm/MHz (5470-5725)		PASS	Section 6.6
15.407(a)(6)	N/A	Peak Excursion	< 13 dB/MHz maximum difference		PASS	Section 6.7
15.407(g)	N/A	Frequency Stability	N/A		PASS	Section 6.8
15.407(b)(1), (2),(3)	RSS-210 [A9.2]	Undesirable Emissions	< -27 dBm/MHz EIRP (5150-5350MHz, 5470-5725MHz)		RADIATED	PASS
15.407(h)	RSS-210 [A9.3]	Dynamic Frequency Selection	See DFS Test Report	PASS		See DFS Test Report
15.205, 5.407(b)(1), (5), (6)	RSS-Gen [7.2.3.2]	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209 (RSS-210 table 3 limits)	PASS		Section 6.10
15.207	RSS-Gen [7.2.2]	AC Conducted Emissions 150kHz – 30MHz	< FCC 15.207 limits or < RSS-Gen table 2 limits	LINE CONDUCTED	PASS	Section 6.11
<b>RECEIVER MODE (RX) / DIGITAL EMISSIONS</b>						
15.107	RSS-Gen [7.2.2]	AC Conducted Emissions 150kHz – 30MHz	< FCC 15.107 limits or < RSS-Gen table 2 limits	LINE CONDUCTED	PASS	Part 15B Test Report
15.109	RSS-Gen [7.2.3.2]	General Field Strength Limits (Restricted Bands and Radiated Emissions Limits)	< FCC 15.109 limits or < RSS-210 table 3 limits	RADIATED (30MHz-1GHz) (1-25 GHz)	PASS	Part 15B Test Report

**Table 6-1. Summary of Test Results**

**NOTE:**

All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions. This phone is identical to the previous sample with FCC ID: A3LGTI9250, conducted plots used are from the FCC ID: A3LGTI9250 test report.

FCC ID: A3LSWDSC04D		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1110181834.A3L	Test Dates: October 26 - 28, 2011	EUT Type: Portable Handset	Page 10 of 73	

## 6.2 26dB Bandwidth Measurement

The bandwidth at 26dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating in transmission mode at the appropriate frequencies. **The 26dB bandwidth is used to determine the conducted power limits.**

	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured 26dB Bandwidth [MHz]
Band I	5180	36	a	6	18.753
	5200	40	a	6	18.710
	5240	48	a	6	18.842
	5180	36	n	6.5/7.2 (MCS0)	19.121
	5200	40	n	6.5/7.2 (MCS0)	19.039
	5240	48	n	6.5/7.2 (MCS0)	19.305
Band II	5260	52	a	6	18.660
	5280	56	a	6	18.946
	5320	64	a	6	18.882
	5260	52	n	6.5/7.2 (MCS0)	19.219
	5280	56	n	6.5/7.2 (MCS0)	19.219
	5320	64	n	6.5/7.2 (MCS0)	19.241
Band III	5500	100	a	6	18.673
	5600	120	a	6	18.838
	5700	140	a	6	18.836
	5500	100	n	6.5/7.2 (MCS0)	19.073
	5600	120	n	6.5/7.2 (MCS0)	19.212
	5700	140	n	6.5/7.2 (MCS0)	19.221

Table 6-2. Conducted Bandwidth Measurements





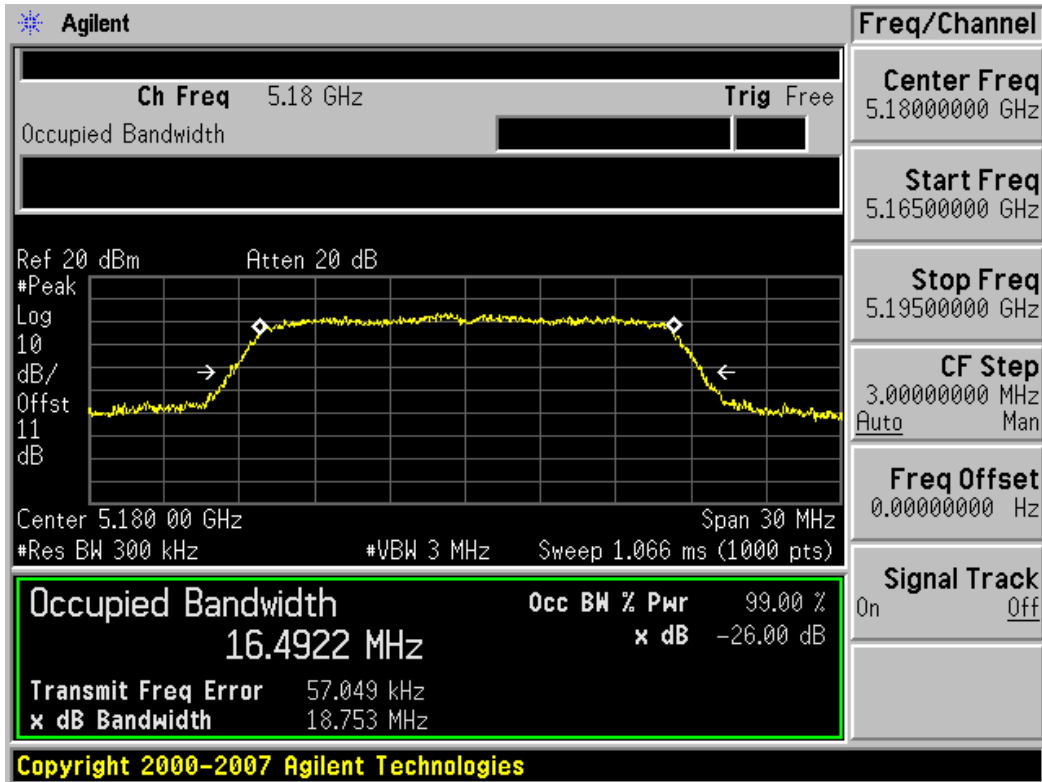


Figure 6-1. Test Instrument & Measurement Setup

FCC ID: A3LSWDSC04D		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1110181834.A3L	Test Dates: October 26 - 28, 2011	EUT Type: Portable Handset		Page 11 of 73

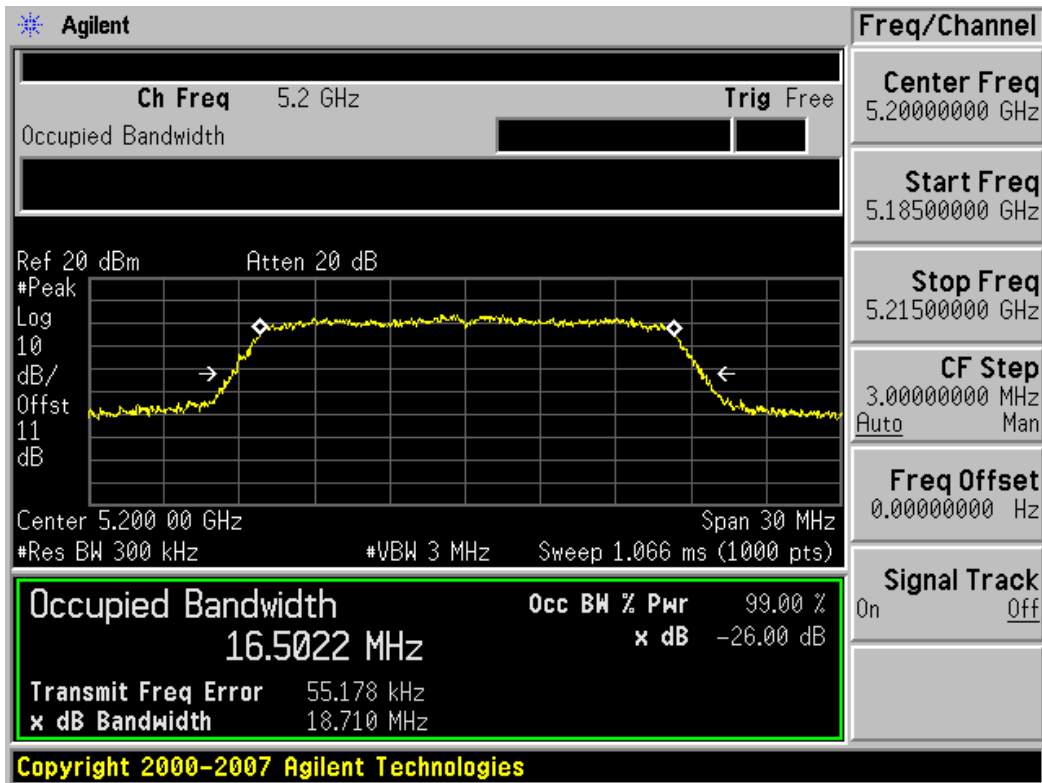


Plot 6-1. 26dB Bandwidth Plot (802.11a (UNII Band 1) – Ch. 36)




Plot 6-2. 26dB Bandwidth Plot (802.11a (UNII Band 1) – Ch. 40)

FCC ID: A3LSWDSC04D		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1110181834.A3L	Test Dates: October 26 - 28, 2011	EUT Type: Portable Handset		Page 12 of 73

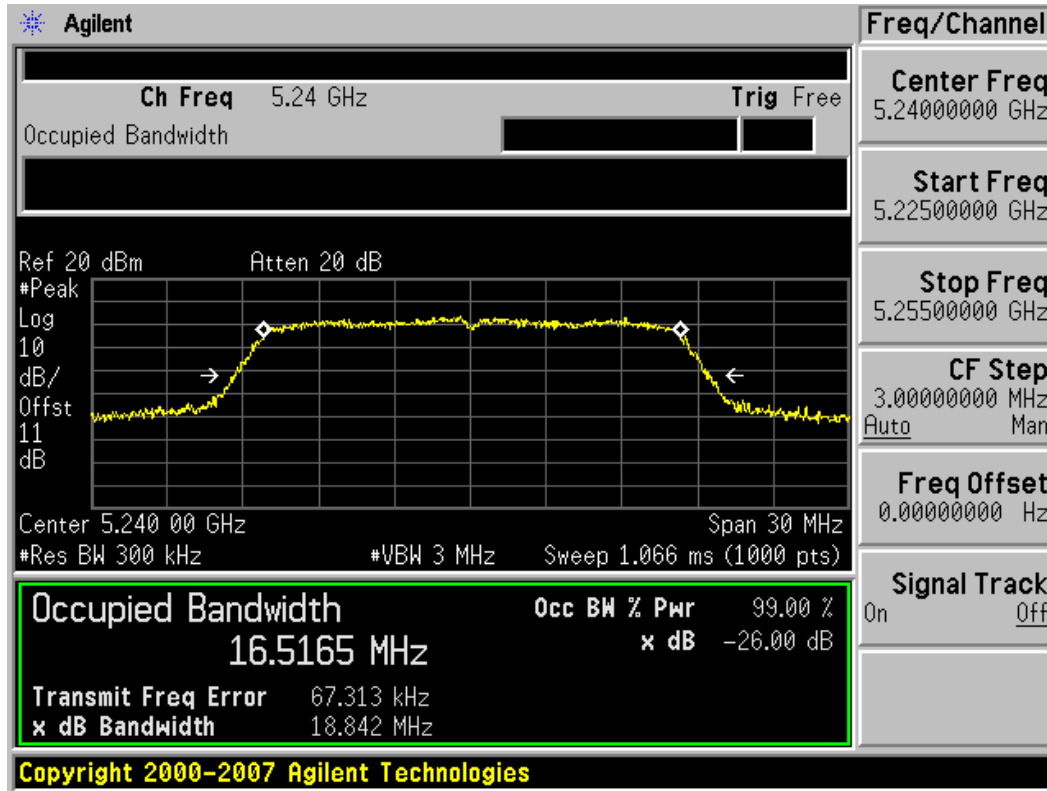


Plot 6-3. 26dB Bandwidth Plot (802.11a (UNII Band 1) – Ch. 48)

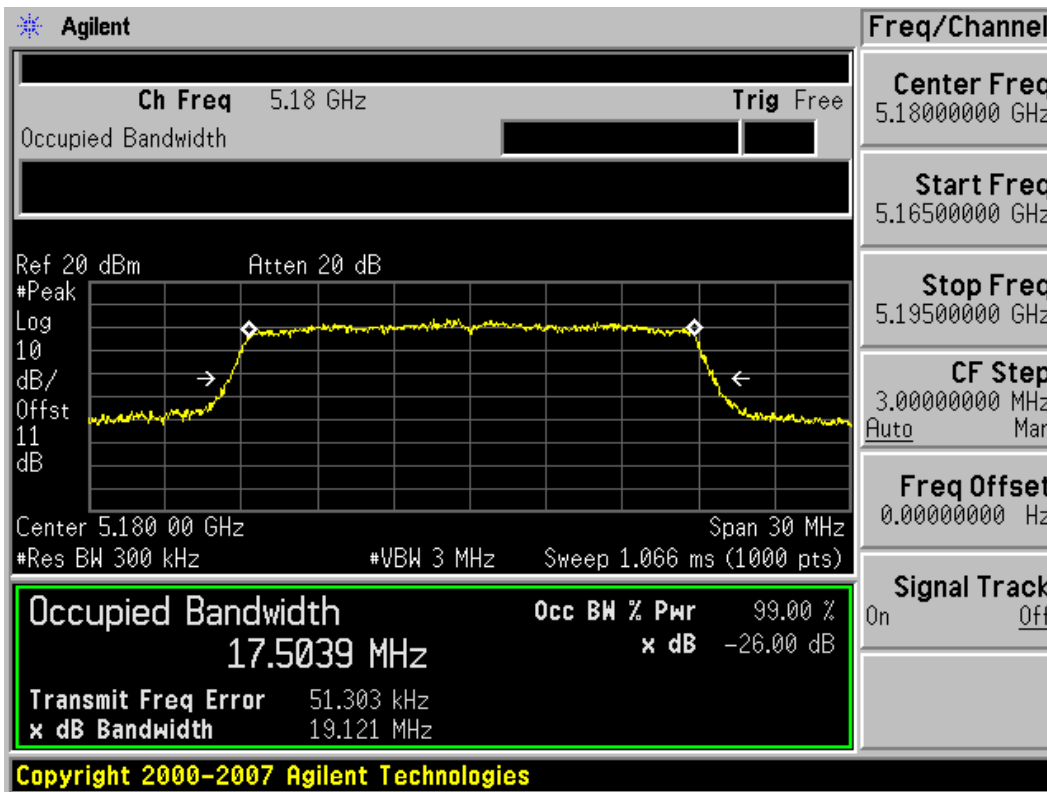


Plot 6-4. 26dB Bandwidth Plot (802.11n (UNII Band 1) – Ch. 36)

FCC ID: A3LSWDSC04D		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1110181834.A3L	Test Dates: October 26 - 28, 2011	EUT Type: Portable Handset		Page 13 of 73

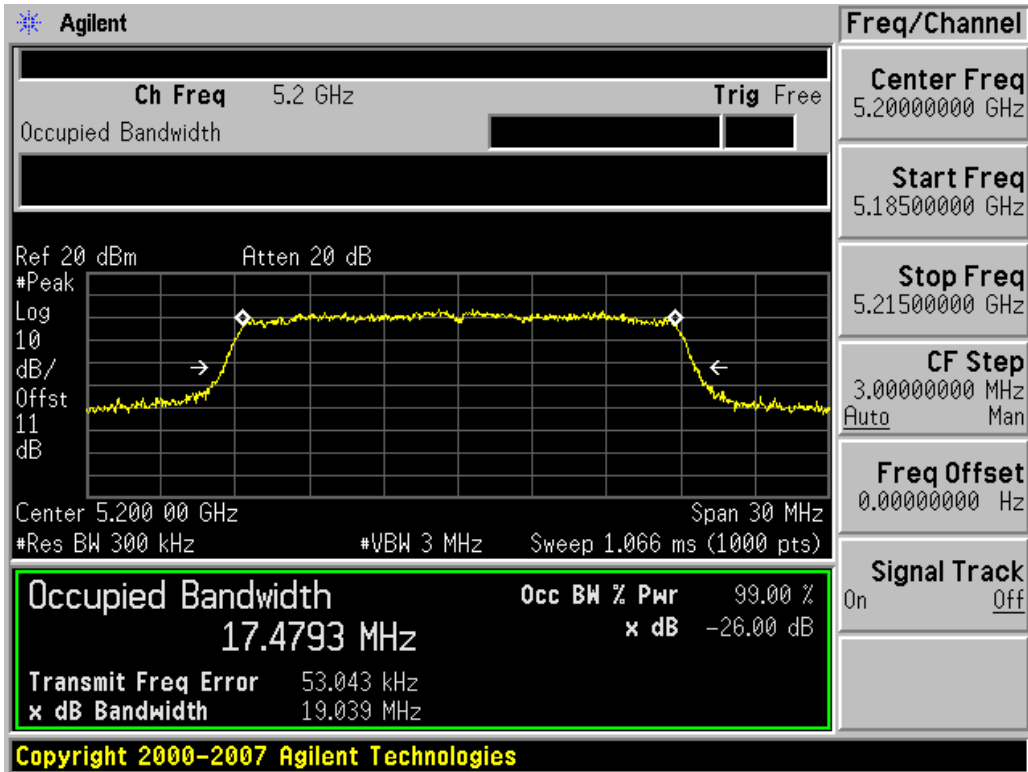


Plot 6-5. 26dB Bandwidth Plot (802.11n (UNII Band 1) – Ch. 40)

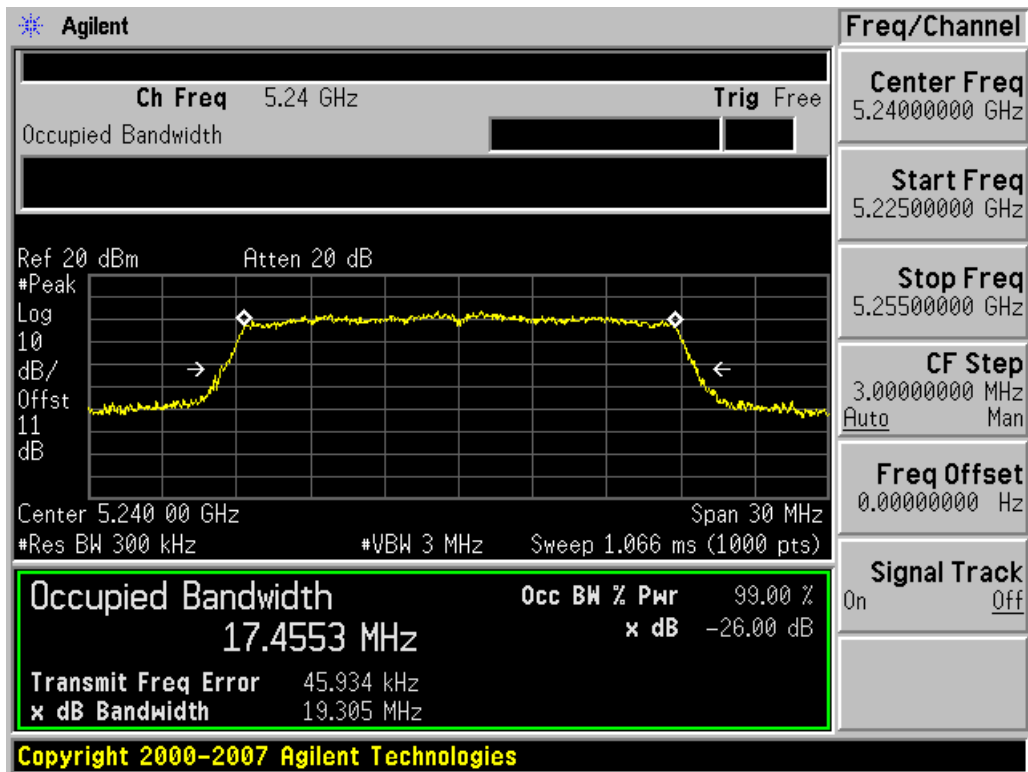


Plot 6-6. 26dB Bandwidth Plot (802.11n (UNII Band 1) – Ch. 48)

FCC ID: A3LSWDSC04D		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1110181834.A3L	Test Dates: October 26 - 28, 2011	EUT Type: Portable Handset		Page 14 of 73

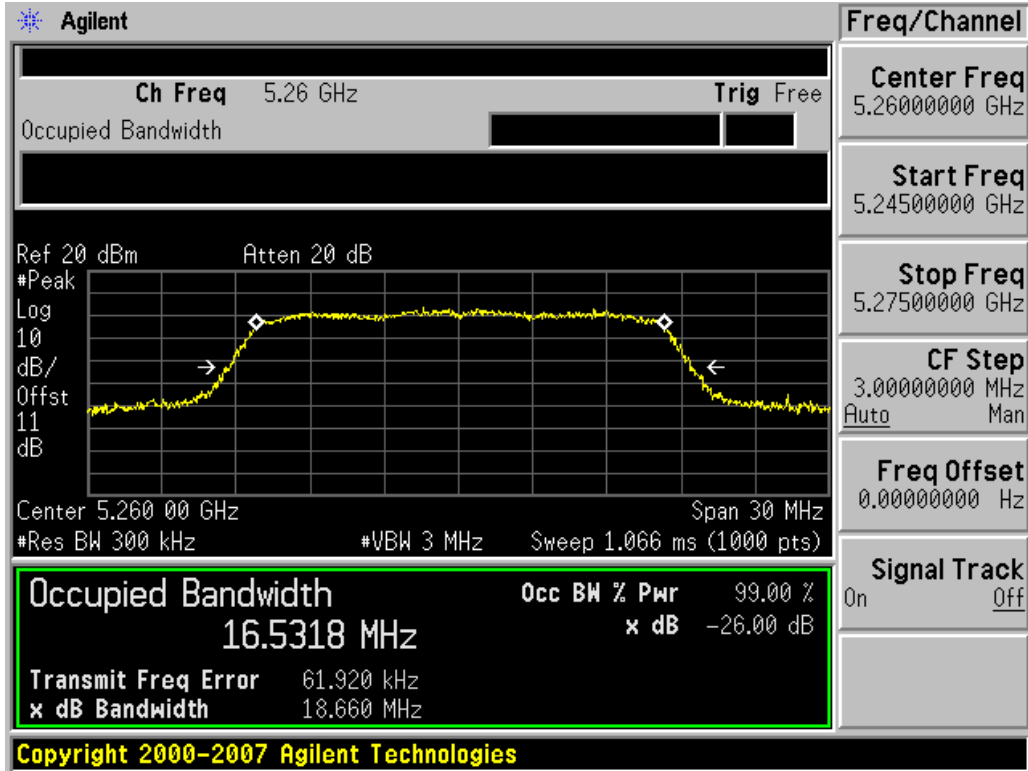


Plot 6-7. 26dB Bandwidth Plot (802.11a (UNII Band 2) – Ch. 52)

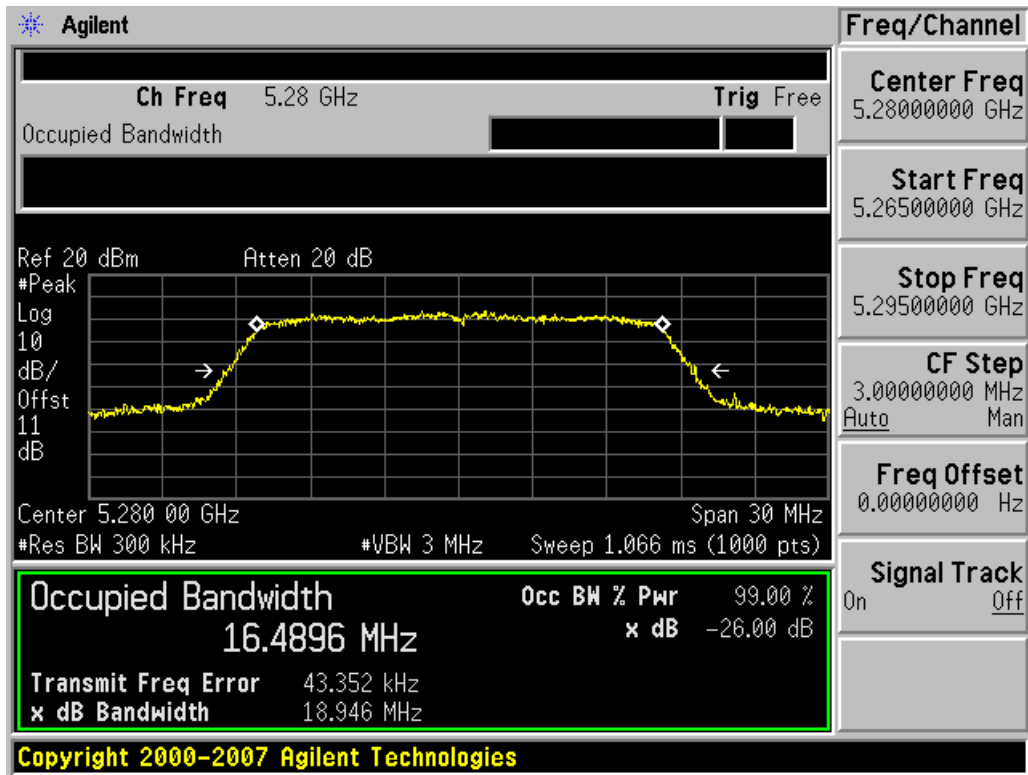


Plot 6-8. 26dB Bandwidth Plot (802.11a (UNII Band 2) – Ch. 56)

FCC ID: A3LSWDSC04D		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1110181834.A3L	Test Dates: October 26 - 28, 2011	EUT Type: Portable Handset		Page 15 of 73

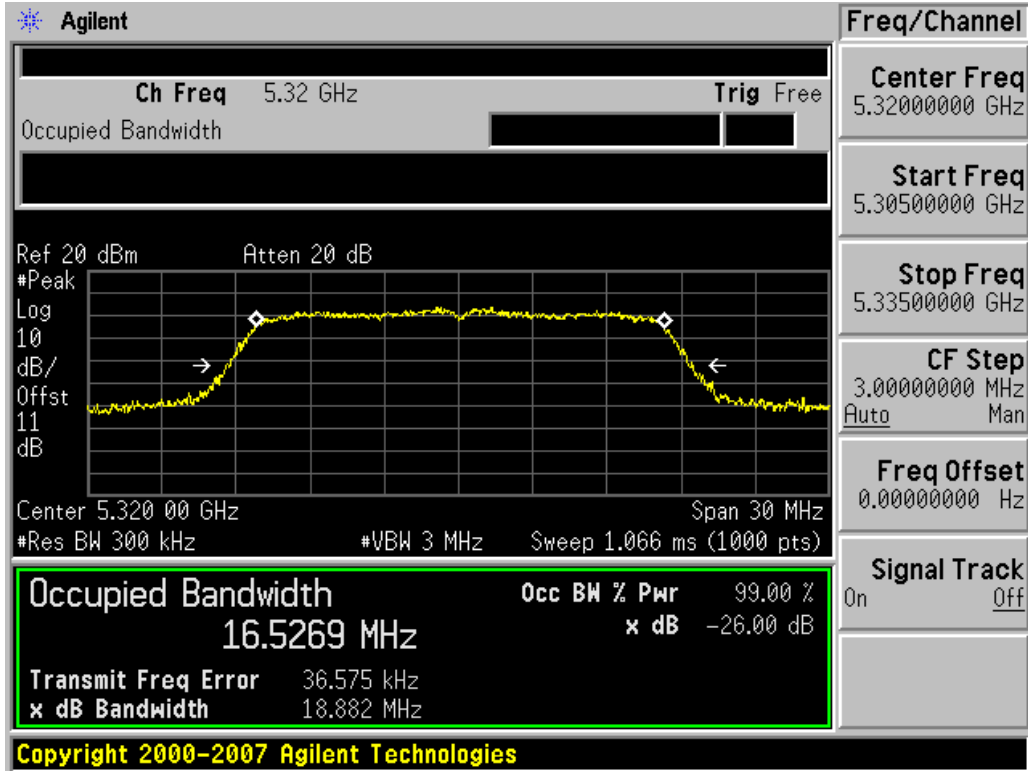


Plot 6-9. 26dB Bandwidth Plot (802.11a (UNII Band 2) – Ch. 64)

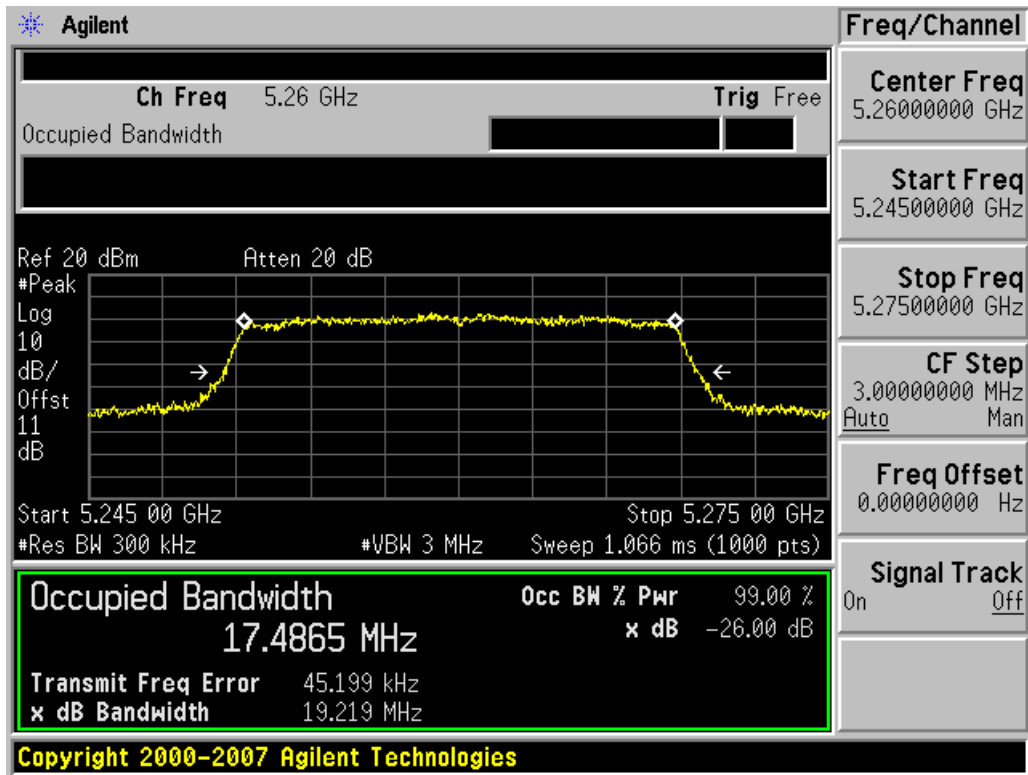


Plot 6-10. 26dB Bandwidth Plot (802.11n (UNII Band 2) – Ch. 52)

FCC ID: A3LSWDSC04D		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1110181834.A3L	Test Dates: October 26 - 28, 2011	EUT Type: Portable Handset		Page 16 of 73

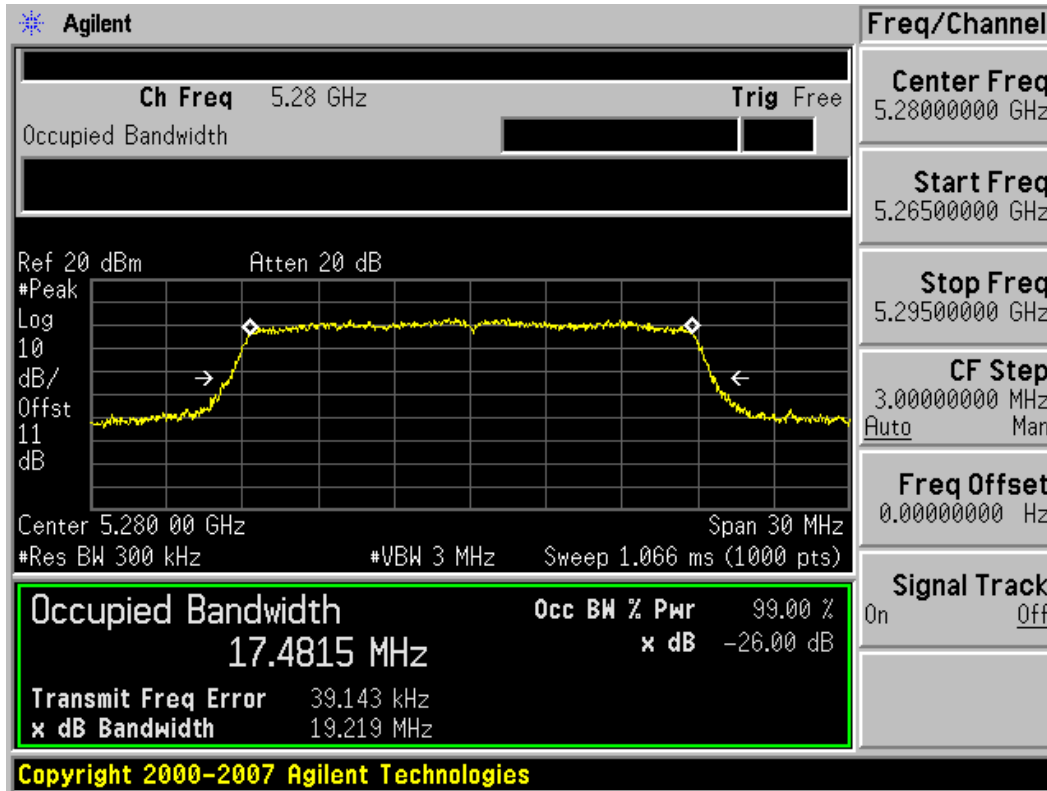


Plot 6-11. 26dB Bandwidth Plot (802.11n (UNII Band 2) – Ch. 56)

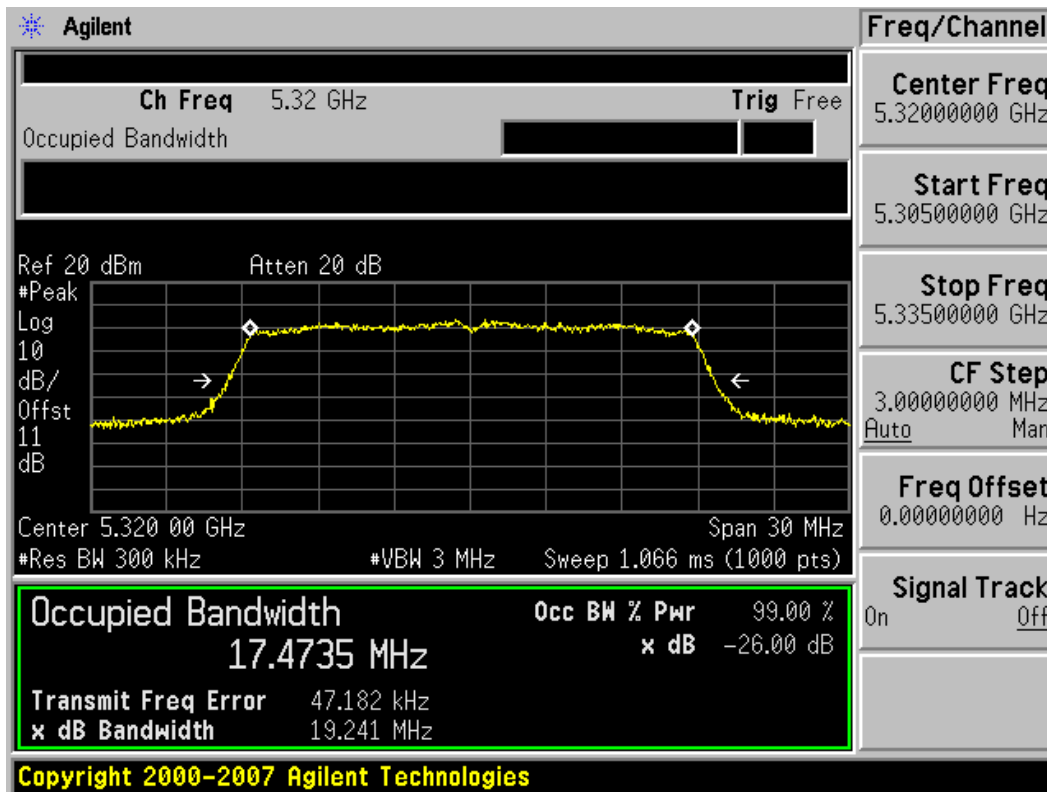


Plot 6-12. 26dB Bandwidth Plot (802.11n (UNII Band 2) – Ch. 64)

FCC ID: A3LSWDSC04D		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1110181834.A3L	Test Dates: October 26 - 28, 2011	EUT Type: Portable Handset		Page 17 of 73

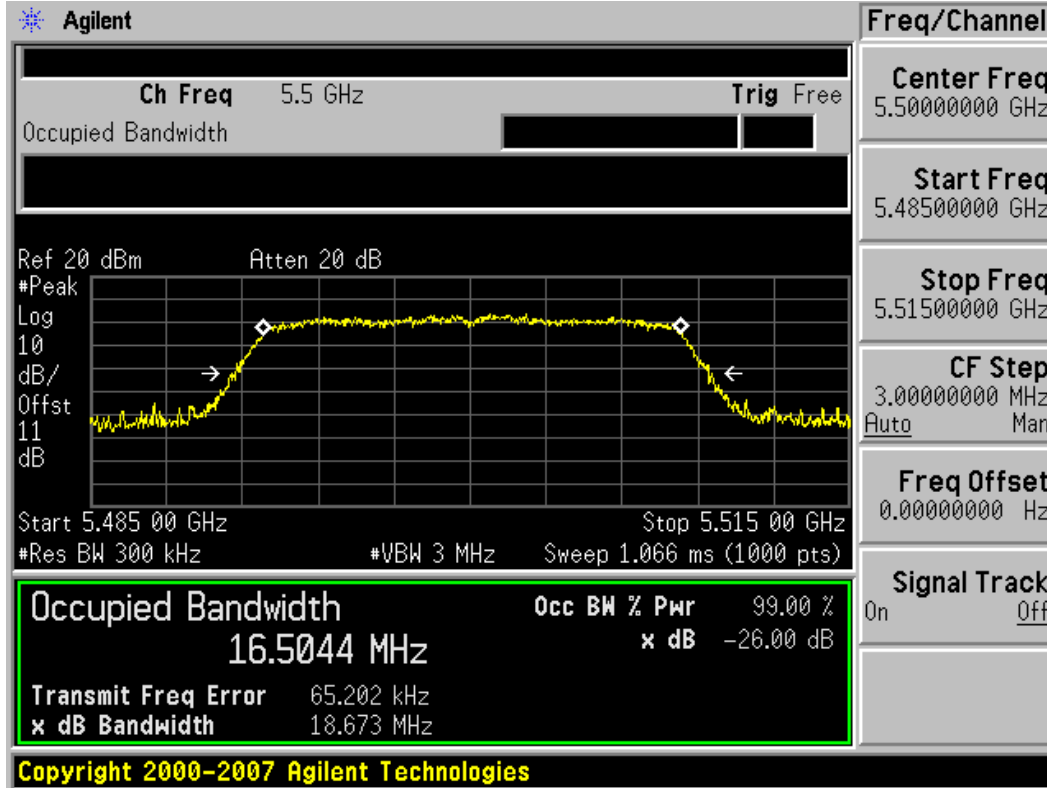


Plot 6-13. 26dB Bandwidth Plot (802.11a (UNII Band 3) – Ch. 100)

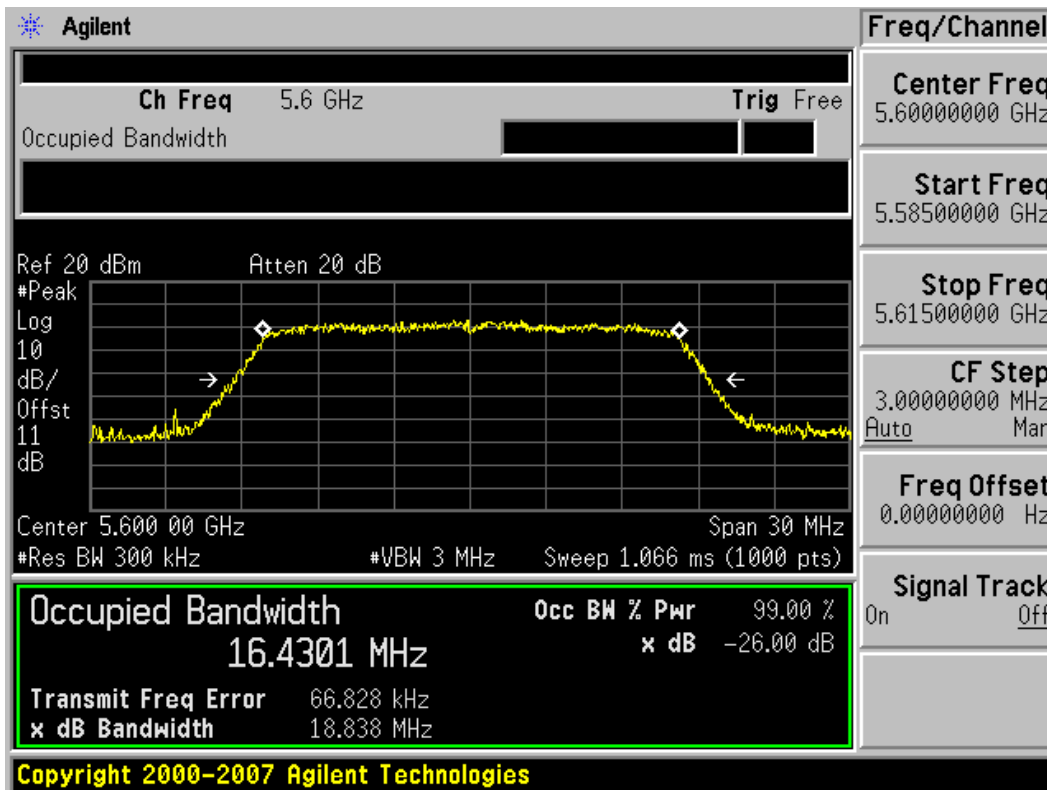


Plot 6-14. 26dB Bandwidth Plot (802.11a (UNII Band 3) – Ch. 120)

FCC ID: A3LSWDSC04D		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1110181834.A3L	Test Dates: October 26 - 28, 2011	EUT Type: Portable Handset		Page 18 of 73

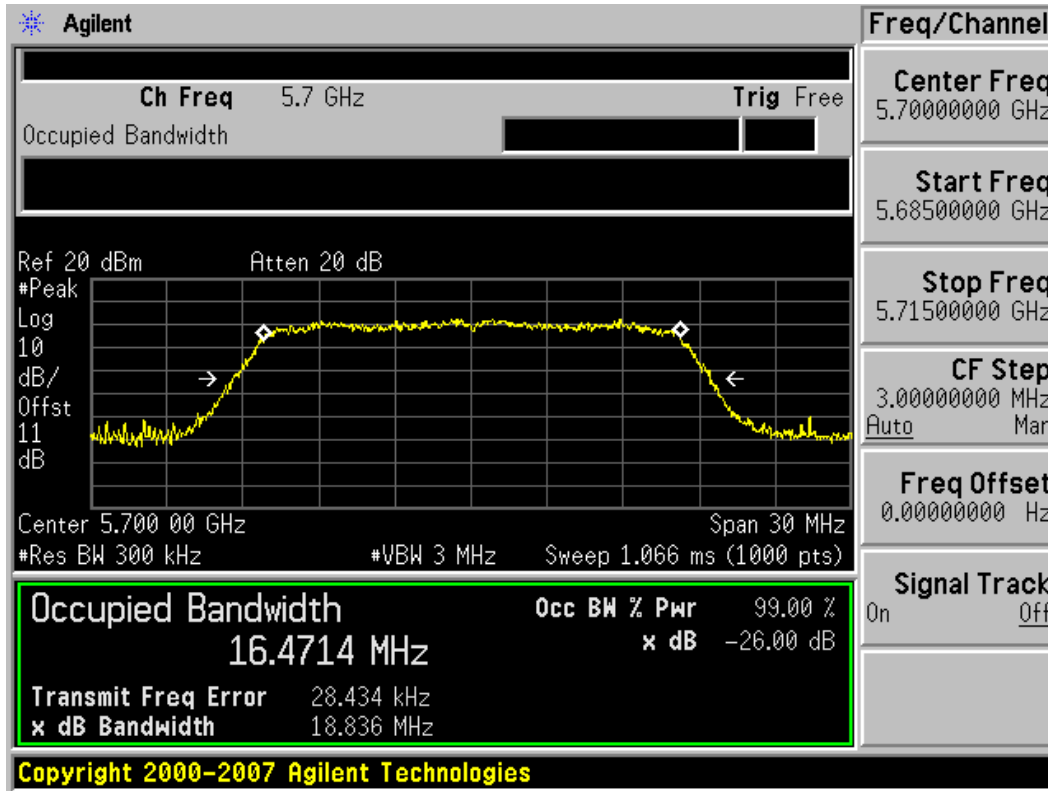


Plot 6-15. 26dB Bandwidth Plot (802.11a (UNII Band 3) – Ch. 140)

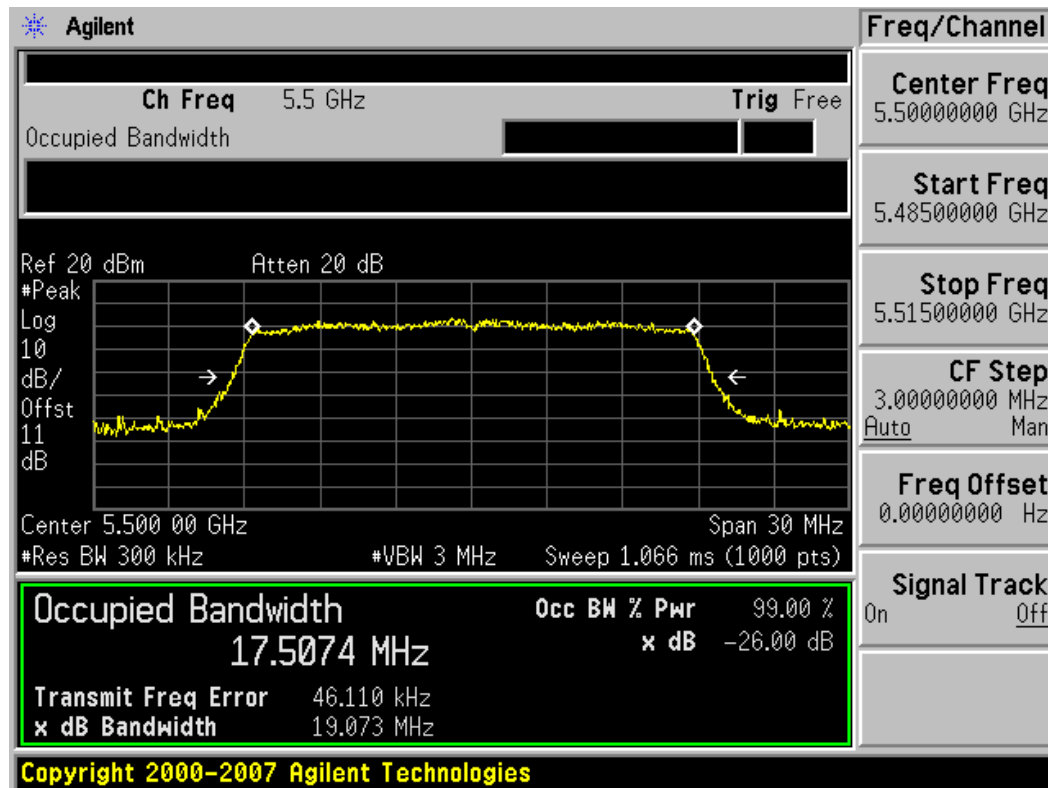


Plot 6-16. 26dB Bandwidth Plot (802.11n (UNII Band 3) – Ch. 100)

FCC ID: A3LSWDSC04D		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1110181834.A3L	Test Dates: October 26 - 28, 2011	EUT Type: Portable Handset		Page 19 of 73

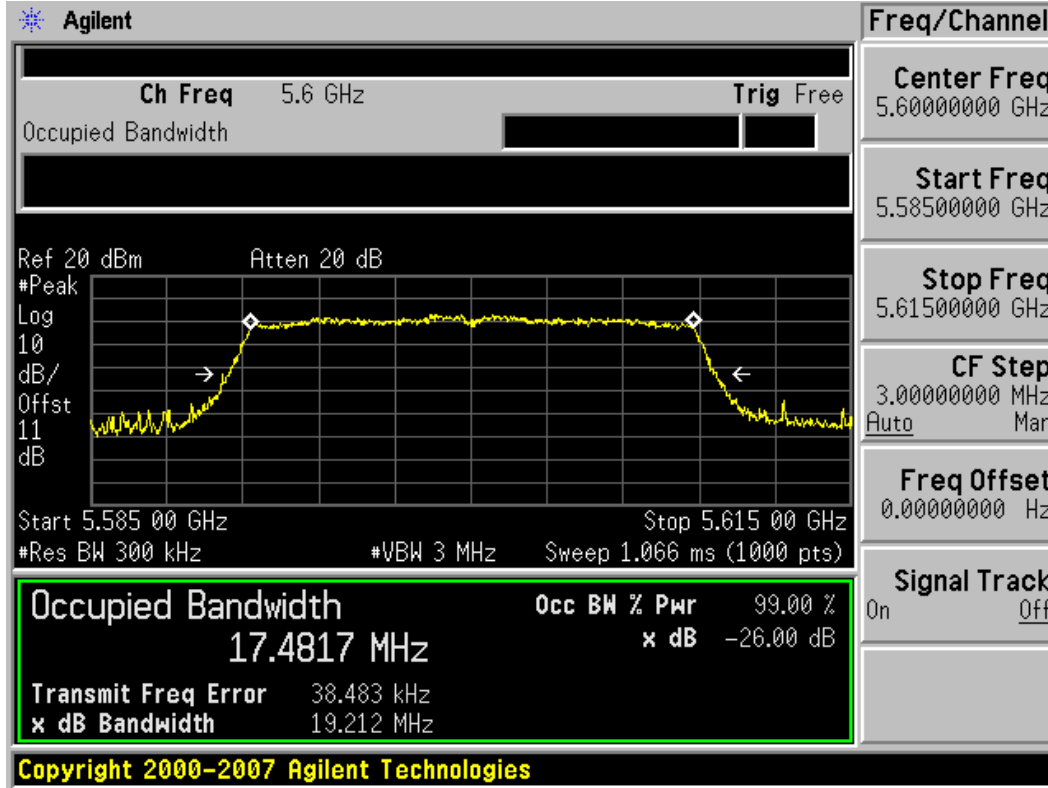

Plot 6-17. 26dB Bandwidth Plot (802.11n (UNII Band 3) – Ch. 120)

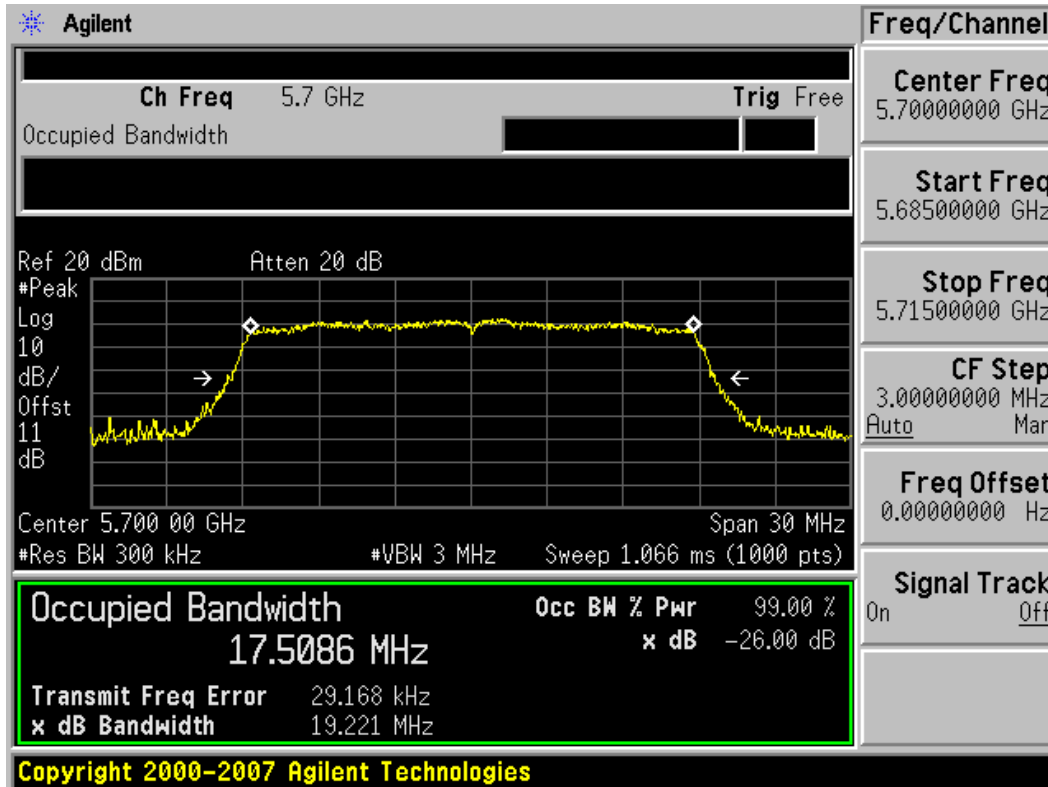

Plot 6-18. 26dB Bandwidth Plot (802.11n (UNII Band 3) – Ch. 140)

FCC ID: A3LSWDSC04D		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1110181834.A3L	Test Dates: October 26 - 28, 2011	EUT Type: Portable Handset		Page 20 of 73

### 6.3 UNII Band 1 Output Power Measurement – 802.11a/n §15.407 (a)(1); RSS-210 [A9.2]



A transmitter antenna terminal of EUT is connected to the input of a RF power sensor. Measurement is made using a broadband power meter while the EUT is operating in transmission mode at the appropriate frequencies. *In the 5.15 – 5.25GHz band, the maximum permissible conducted output power is the lesser of 50mW (16.99dBm) and  $4 \text{ dBm} + 10\log_{10}(26\text{dB BW}) = 4 \text{ dBm} + 10\log_{10}(18.71) = 16.72\text{dBm}$ .*

Freq [MHz]	Channel	Data Rate [Mbps]	Measured Average Power [dBm]
5180	36	6	11.85
		9	11.91
		12	11.94
		18	11.95
		24	11.95
		36	11.97
		48	11.98
		54	11.95
5200	40	6	11.91
		9	11.90
		12	11.87
		18	11.84
		24	11.88
		36	11.91
		48	11.93
		54	11.91
5240	48	6	11.77
		9	11.71
		12	11.72
		18	11.76
		24	11.75
		36	11.73
		48	11.79
		54	11.75

Table 6-3. UNII 802.11a Band I Conducted Output Power Measurements

Freq [MHz]	Channel	MCS Index	Data Rate [Mbps]	Measured Average Power [dBm]
5180	36	0	6.5/7.2	10.77
		1	13/14.4	10.74
		2	19.5/21.7	10.76
		3	26/28.9	10.78
		4	39/43.3	10.79
		5	52/57.8	10.82
		6	58.5/65	10.84
		7	65/72.2	10.81
5200	40	0	6.5/7.2	10.72
		1	13/14.4	10.73
		2	19.5/21.7	10.73
		3	26/28.9	10.75
		4	39/43.3	10.72
		5	52/57.8	10.76
		6	58.5/65	10.77
		7	65/72.2	10.74
5240	48	0	6.5/7.2	10.65
		1	13/14.4	10.59
		2	19.5/21.7	10.61
		3	26/28.9	10.62
		4	39/43.3	10.63
		5	52/57.8	10.59
		6	58.5/65	10.62
		7	65/72.2	10.63

Table 6-4. UNII 802.11n Band I Conducted Output Power Measurements

FCC ID: A3LSWDSC04D		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1110181834.A3L	Test Dates: October 26 - 28, 2011	EUT Type: Portable Handset	Page 21 of 73	

#### 6.4 UNII Band 2 Output Power Measurement – 802.11a/n §15.407 (a)(1); RSS-210 [A9.2]



A transmitter antenna terminal of EUT is connected to the input of a RF power sensor. Measurement is made using a broadband power meter while the EUT is operating in transmission mode at the appropriate frequencies. ***In the 5.25 – 5.35GHz band, the maximum permissible conducted output power is the lesser of 250mW (23.98dBm) and 11 dBm + 10log<sub>10</sub>(26dB BW) = 11 dBm + 10log<sub>10</sub>(18.66) = 23.71dBm.***

Freq [MHz]	Channel	Data Rate [Mbps]	Measured Average Power [dBm]
5260	52	6	11.69
		9	11.67
		12	11.72
		18	11.66
		24	11.69
		36	11.72
		48	11.70
		54	11.73
5280	56	6	11.60
		9	11.58
		12	11.56
		18	11.63
		24	11.61
		36	11.58
		48	11.60
		54	11.65
5320	64	6	11.42
		9	11.43
		12	11.42
		18	11.44
		24	11.45
		36	11.48
		48	11.46
		54	11.47

Table 6-5. UNII 802.11a Band II Conducted Output Power Measurements

Freq [MHz]	Channel	MCS Index	Data Rate [Mbps]	Measured Average Power [dBm]
5260	52	0	6.5/7.2	10.52
		1	13/14.4	10.55
		2	19.5/21.7	10.57
		3	26/28.9	10.51
		4	39/43.3	10.54
		5	52/57.8	10.56
		6	58.5/65	10.59
		7	65/72.2	10.63
5280	56	0	6.5/7.2	10.47
		1	13/14.4	10.44
		2	19.5/21.7	10.46
		3	26/28.9	10.49
		4	39/43.3	10.45
		5	52/57.8	10.50
		6	58.5/65	10.52
		7	65/72.2	10.56
5320	64	0	6.5/7.2	10.32
		1	13/14.4	10.29
		2	19.5/21.7	10.28
		3	26/28.9	10.34
		4	39/43.3	10.35
		5	52/57.8	10.25
		6	58.5/65	10.37
		7	65/72.2	10.36

Table 6-6. UNII 802.11n Band II Conducted Output Power Measurements

FCC ID: A3LSWDSC04D		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1110181834.A3L	Test Dates: October 26 - 28, 2011	EUT Type: Portable Handset	Page 22 of 73	

## 6.5 UNII Band 3 Output Power Measurement – 802.11a/n

§15.407 (a)(1); RSS-210 [A9.2]



A transmitter antenna terminal of EUT is connected to the input of a RF power sensor. Measurement is made using a broadband power meter while the EUT is operating in transmission mode at the appropriate frequencies. ***In the 5.47 – 5.725GHz band, the maximum permissible conducted output power is the lesser of 250mW (23.98dBm) and  $11\text{ dBm} + 10\log_{10}(26\text{dB BW}) = 11\text{ dBm} + 10\log_{10}(18.67) = 23.71\text{dBm}$ .***

Freq [MHz]	Channel	Data Rate [Mbps]	Measured Average Power [dBm]
5500	100	6	12.05
		9	12.07
		12	12.08
		18	12.13
		24	12.12
		36	12.14
		48	12.15
		54	12.17
		5600	120
9	11.54		
12	11.58		
18	11.57		
24	11.59		
36	11.62		
48	11.64		
54	11.56		
5700	140		
		9	11.17
		12	11.11
		18	11.15
		24	11.16
		36	11.19
		48	11.20
		54	11.18

**Table 6-7. UNII 802.11a Band III Conducted Output Power Measurements**

Freq [MHz]	Channel	MCS Index	Data Rate [Mbps]	Measured Average Power [dBm]
5500	100	0	6.5/7.2	11.01
		1	13/14.4	11.02
		2	19.5/21.7	11.01
		3	26/28.9	11.04
		4	39/43.3	11.07
		5	52/57.8	11.08
		6	58.5/65	11.06
		7	65/72.2	11.00
5600	120	0	6.5/7.2	10.48
		1	13/14.4	10.46
		2	19.5/21.7	10.45
		3	26/28.9	10.49
		4	39/43.3	10.51
		5	52/57.8	10.50
		6	58.5/65	10.55
		7	65/72.2	10.51
5700	140	0	6.5/7.2	10.08
		1	13/14.4	10.03
		2	19.5/21.7	10.12
		3	26/28.9	10.09
		4	39/43.3	10.05
		5	52/57.8	10.08
		6	58.5/65	10.10
		7	65/72.2	10.09

**Table 6-8. UNII 802.11n Band III Conducted Output Power Measurements**

FCC ID: A3LSWDSC04D		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1110181834.A3L	Test Dates: October 26 - 28, 2011	EUT Type: Portable Handset	Page 23 of 73	

## 6.6 Peak Power Spectral Density

§15.407 (a)(1),(5)

The spectrum analyzer was connected to the antenna terminal while the EUT was operating in a continuous transmission mode at the appropriate center frequencies. **The maximum permissible peak power spectral density is 4dBm/MHz in the 5.15GHz – 5.25GHz band and 11dBm/MHz in the 5.25GHz – 5.35 GHz and 5.47 – 5.725GHz bands.**

	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Power Density [dBm]	Max Permissible Power Density [dBm/MHz]	Margin [dB]
Band I	5180	36	a	6	1.842	4.0	-2.16
	5200	40	a	6	1.303	4.0	-2.70
	5240	48	a	6	1.035	4.0	-2.97
	5180	36	n	6.5/7.2 (MCS0)	1.253	4.0	-2.75
	5200	40	n	6.5/7.2 (MCS0)	1.253	4.0	-2.75
	5240	48	n	6.5/7.2 (MCS0)	1.184	4.0	-2.82
Band II	5260	52	a	6	1.407	11.0	-9.59
	5280	56	a	6	1.626	11.0	-9.37
	5320	64	a	6	1.423	11.0	-9.58
	5260	52	n	6.5/7.2 (MCS0)	0.097	11.0	-10.90
	5280	56	n	6.5/7.2 (MCS0)	0.667	11.0	-10.33
	5320	64	n	6.5/7.2 (MCS0)	0.858	11.0	-10.14
Band III	5500	100	a	6	1.590	11.0	-9.41
	5600	120	a	6	1.226	11.0	-9.77
	5700	140	a	6	0.590	11.0	-10.41
	5500	100	n	6.5/7.2 (MCS0)	1.249	11.0	-9.75
	5600	120	n	6.5/7.2 (MCS0)	0.868	11.0	-10.13
	5700	140	n	6.5/7.2 (MCS0)	0.552	11.0	-10.45

Table 6-9. Conducted Power Spectral Density Measurements





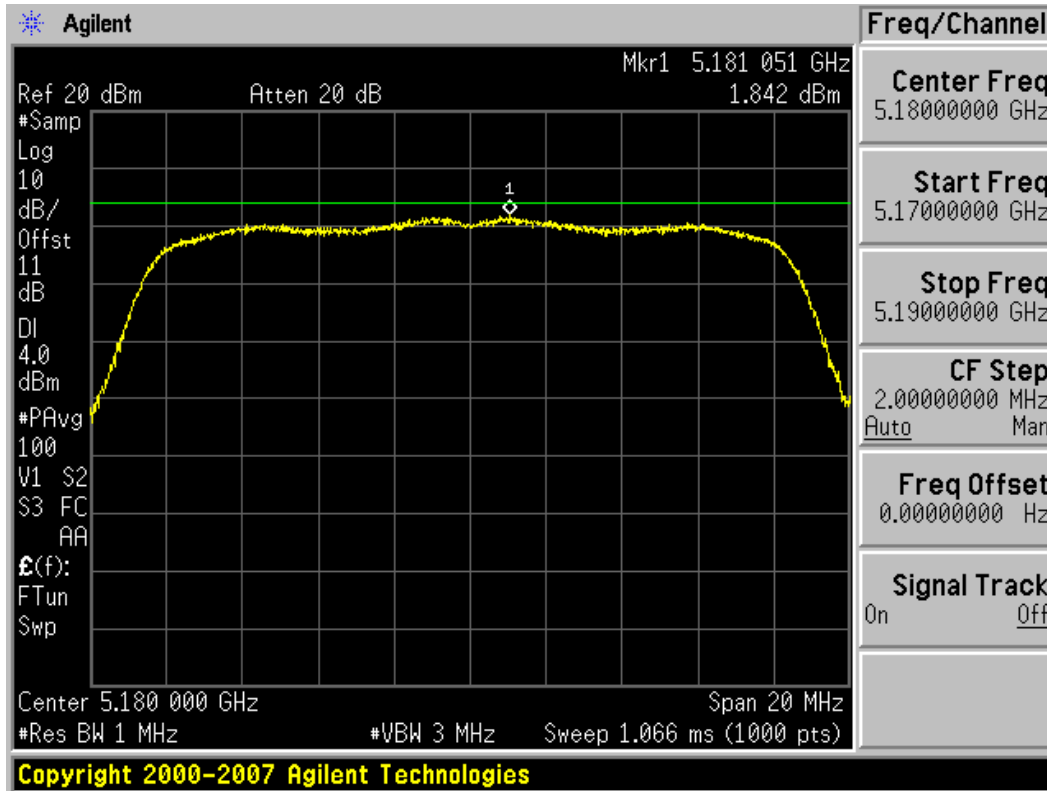


Figure 6-2. Test Instrument & Measurement Setup

FCC ID: A3LSWDSC04D		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1110181834.A3L	Test Dates: October 26 - 28, 2011	EUT Type: Portable Handset	Page 24 of 73	

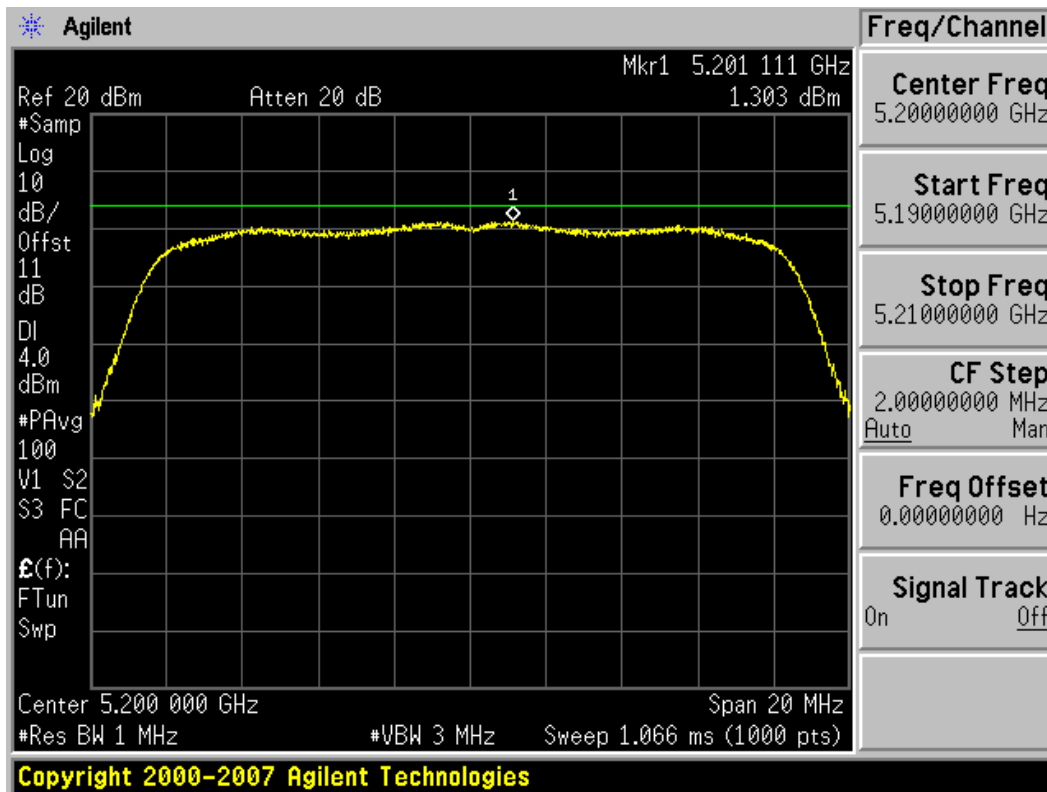


Plot 6-19. Peak Power Spectral Density Plot (802.11a (UNII Band 1) – Ch. 36)




Plot 6-20. Peak Power Spectral Density Plot (802.11a (UNII Band 1) – Ch. 40)

FCC ID: A3LSWDSC04D		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1110181834.A3L	Test Dates: October 26 - 28, 2011	EUT Type: Portable Handset		Page 25 of 73

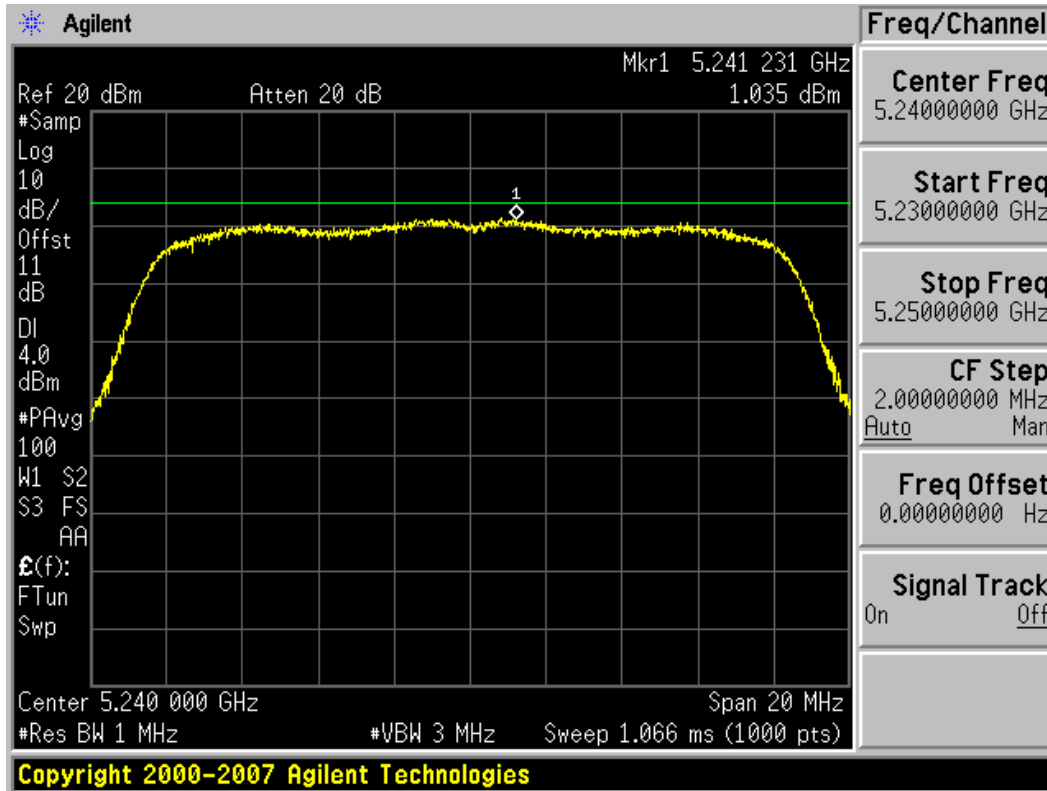


Plot 6-21. Peak Power Spectral Density Plot (802.11a (UNII Band 1) – Ch. 48)

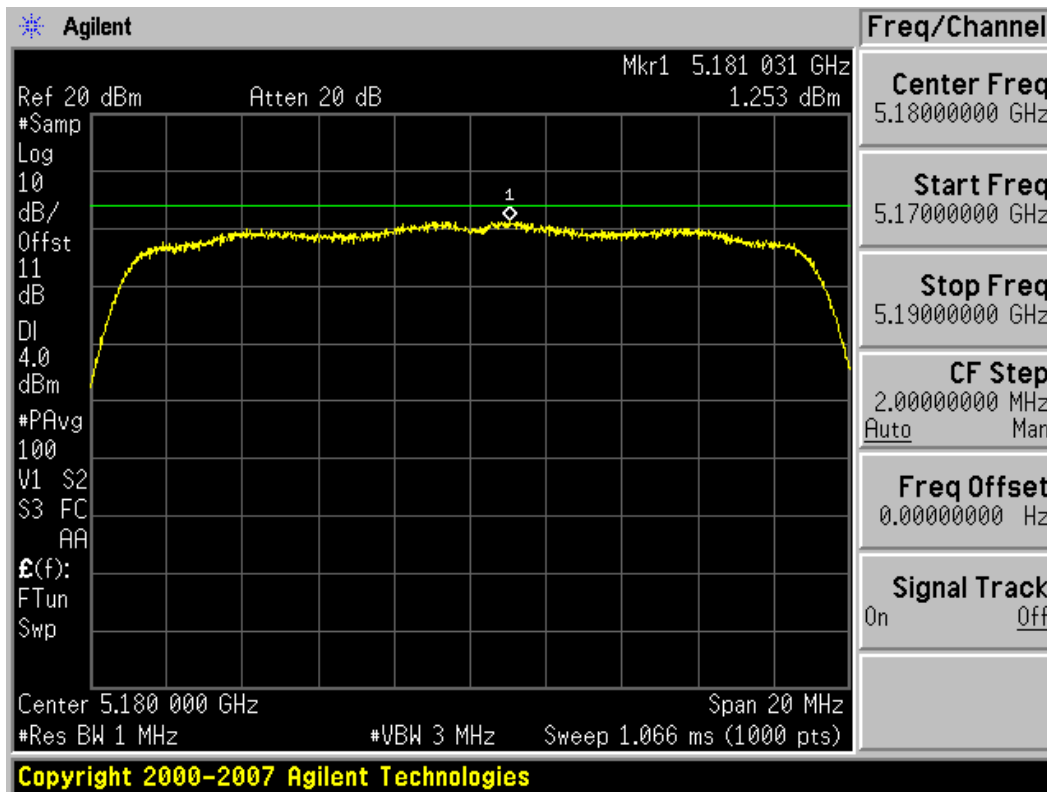


Plot 6-22. Peak Power Spectral Density Plot (802.11n (UNII Band 1) – Ch. 36)

FCC ID: A3LSWDSC04D		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1110181834.A3L	Test Dates: October 26 - 28, 2011	EUT Type: Portable Handset		Page 26 of 73

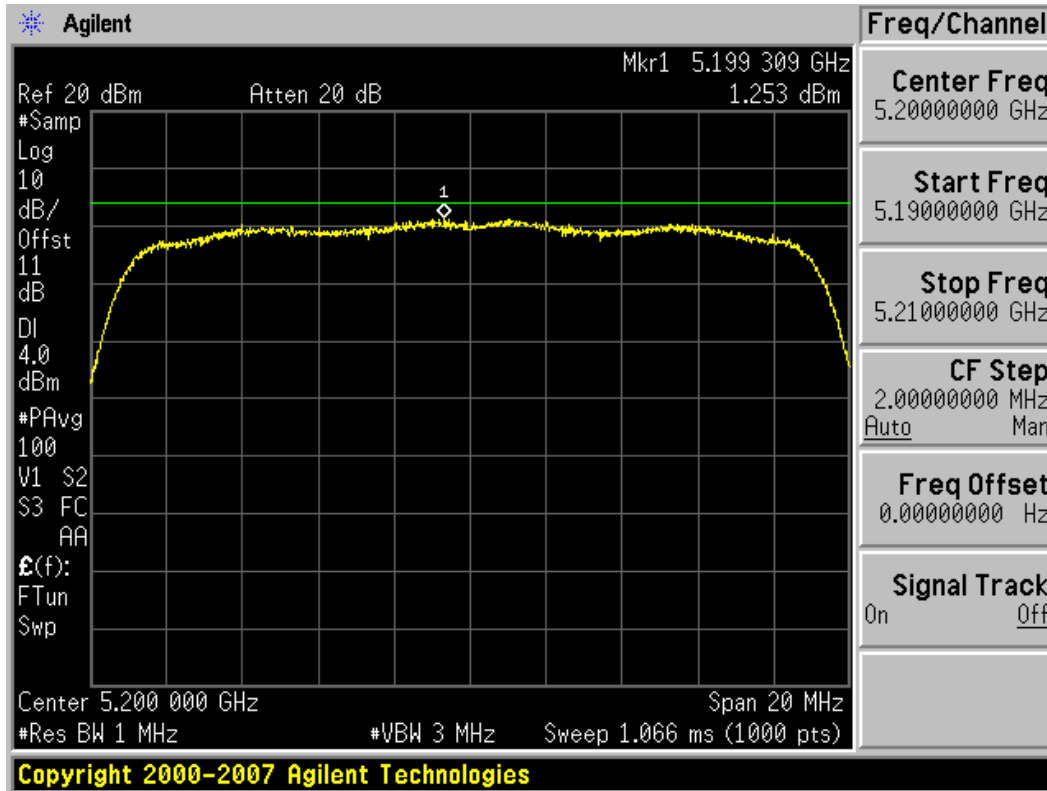


Plot 6-23. Peak Power Spectral Density Plot (802.11n (UNII Band 1) – Ch. 40)

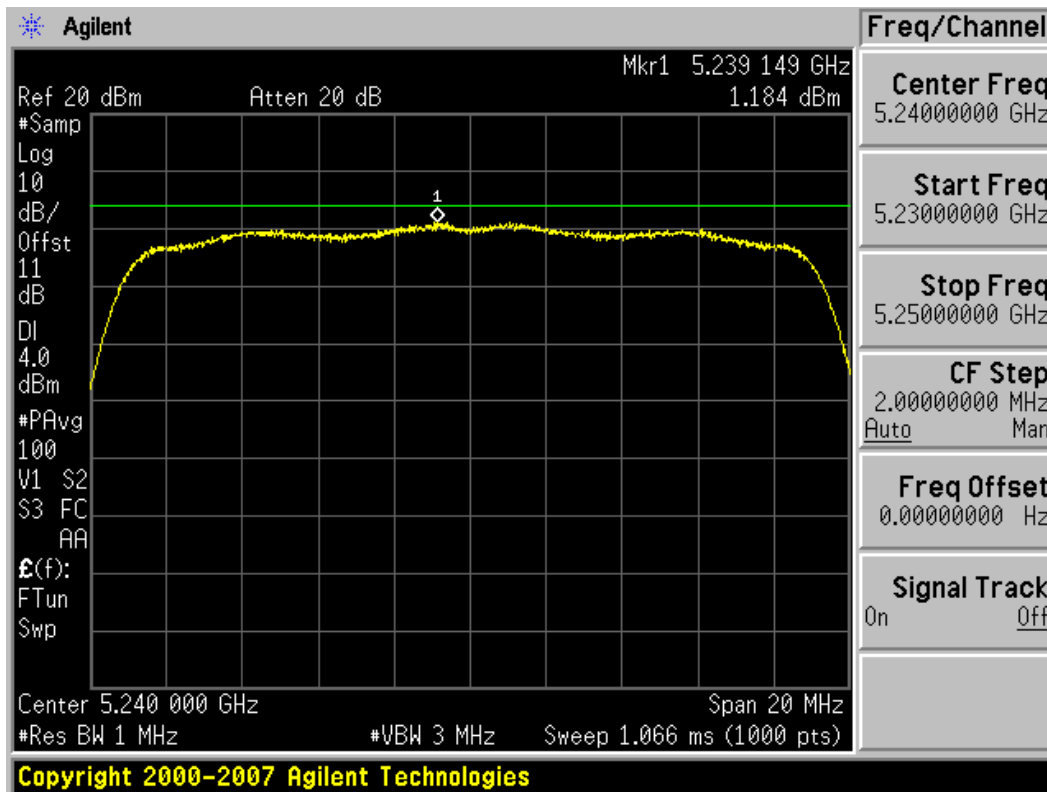


Plot 6-24. Peak Power Spectral Density Plot (802.11n (UNII Band 1) – Ch. 48)

FCC ID: A3LSWDSC04D		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1110181834.A3L	Test Dates: October 26 - 28, 2011	EUT Type: Portable Handset		Page 27 of 73

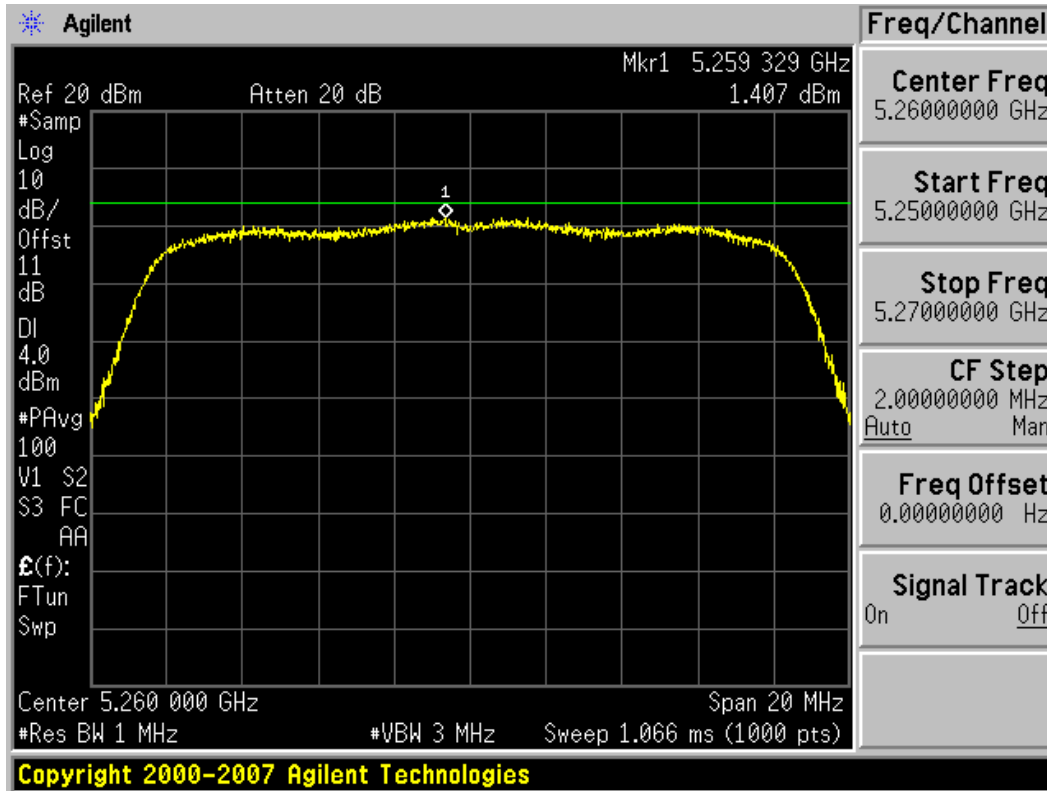


Plot 6-25. Peak Power Spectral Density Plot (802.11a (UNII Band 2) – Ch. 52)

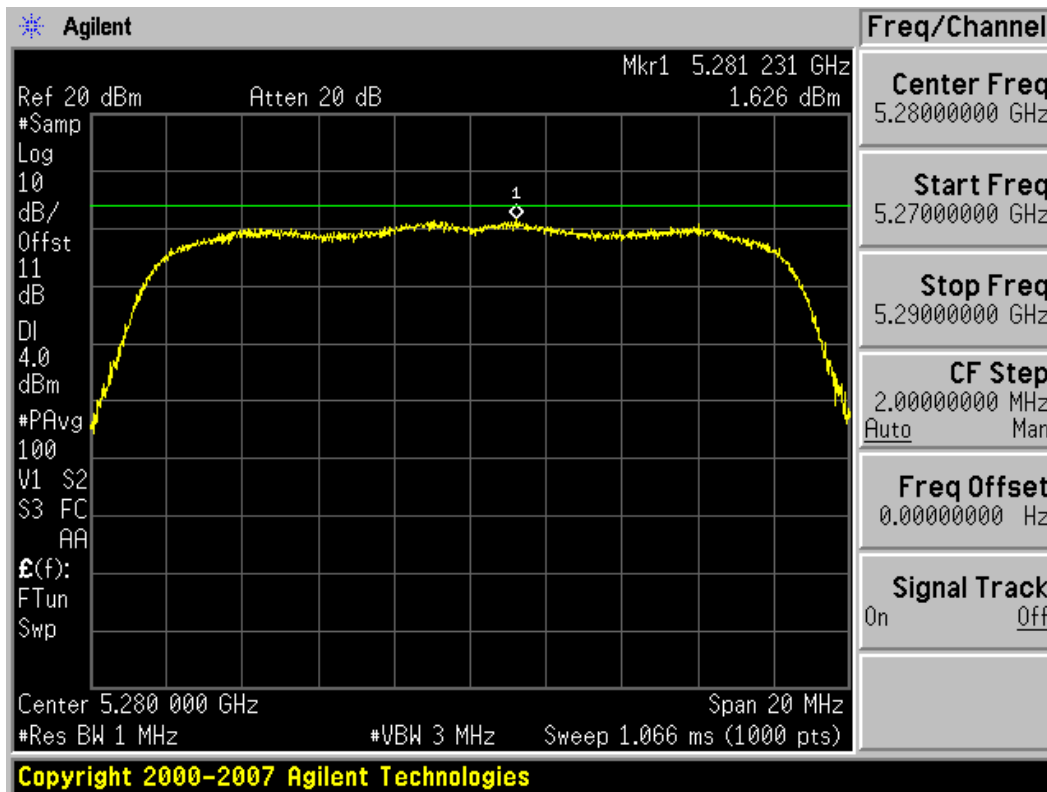


Plot 6-26. Peak Power Spectral Density Plot (802.11a (UNII Band 2) – Ch. 56)

FCC ID: A3LSWDSC04D		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1110181834.A3L	Test Dates: October 26 - 28, 2011	EUT Type: Portable Handset		Page 28 of 73

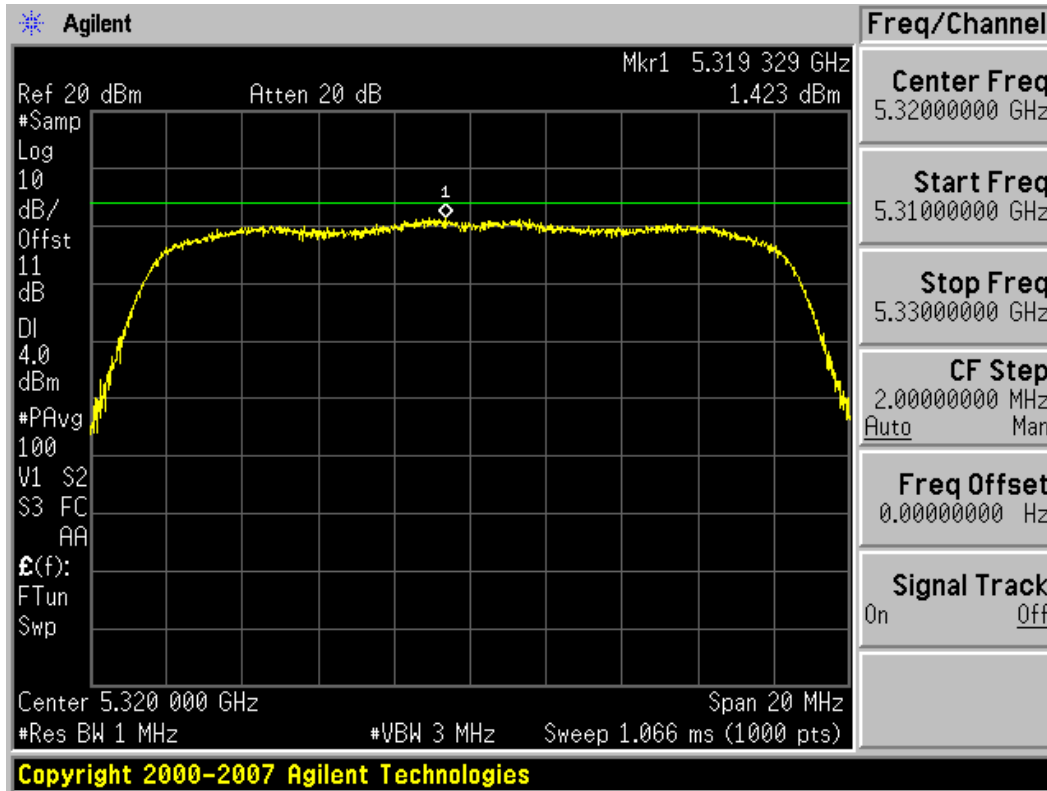


Plot 6-27. Peak Power Spectral Density Plot (802.11a (UNII Band 2) – Ch. 64)

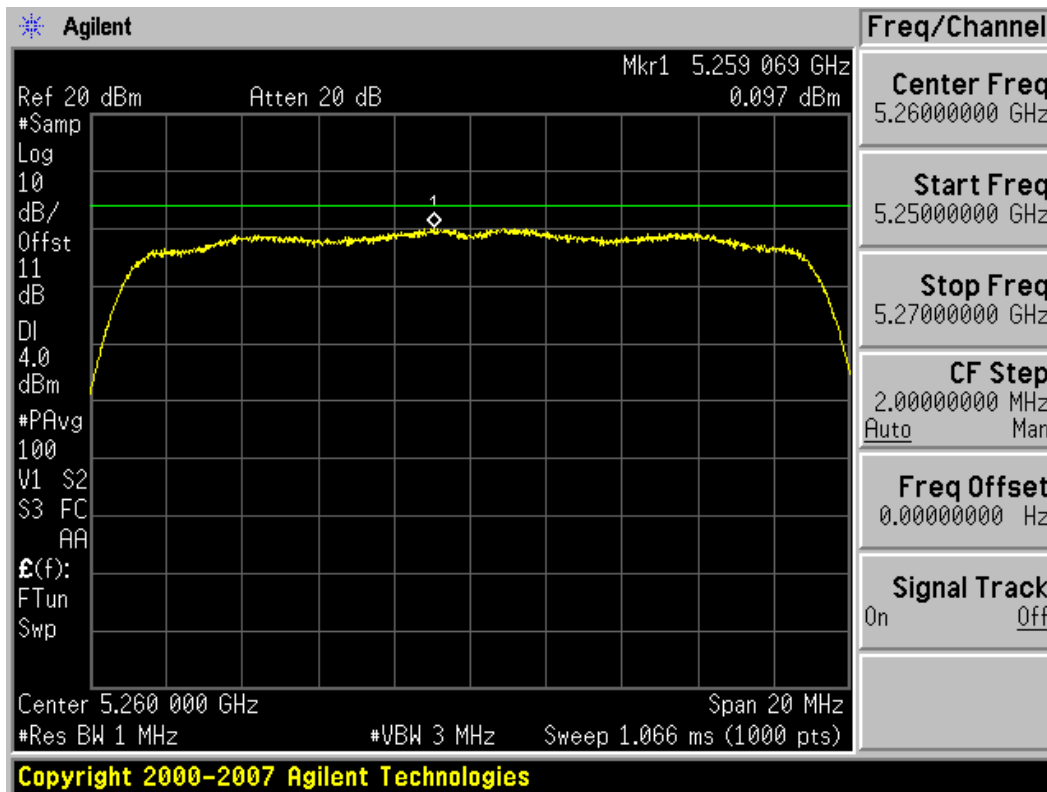


Plot 6-28. Peak Power Spectral Density Plot (802.11n (UNII Band 2) – Ch. 52)

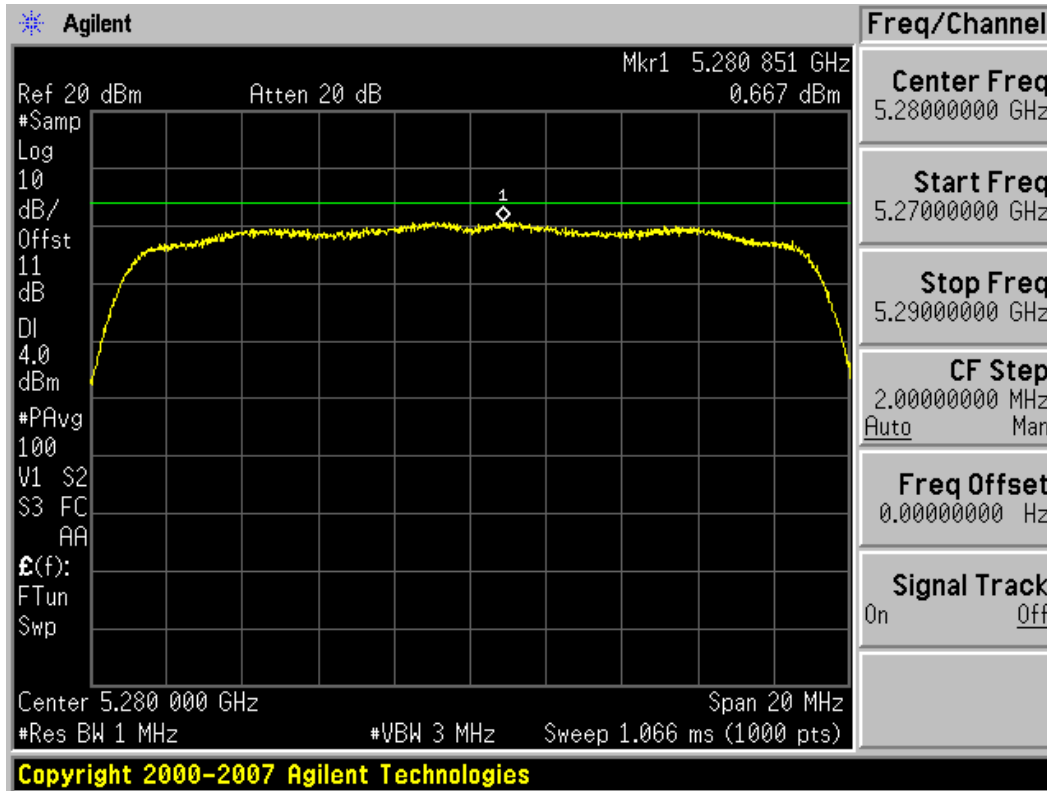

FCC ID: A3LSWDSC04D		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1110181834.A3L	Test Dates: October 26 - 28, 2011	EUT Type: Portable Handset	Page 29 of 73	

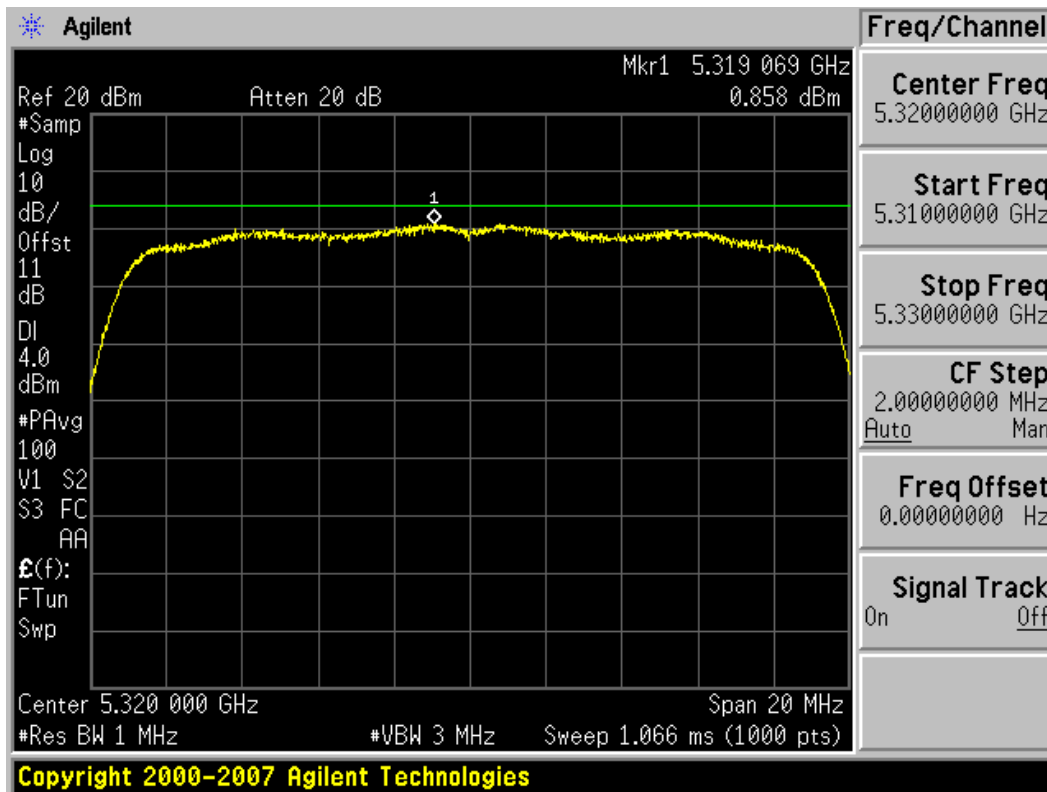


Plot 6-29. Peak Power Spectral Density Plot (802.11n (UNII Band 2) – Ch. 56)




Plot 6-30. Peak Power Spectral Density Plot (802.11n (UNII Band 2) – Ch. 64)

FCC ID: A3LSWDSC04D		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1110181834.A3L	Test Dates: October 26 - 28, 2011	EUT Type: Portable Handset		Page 30 of 73

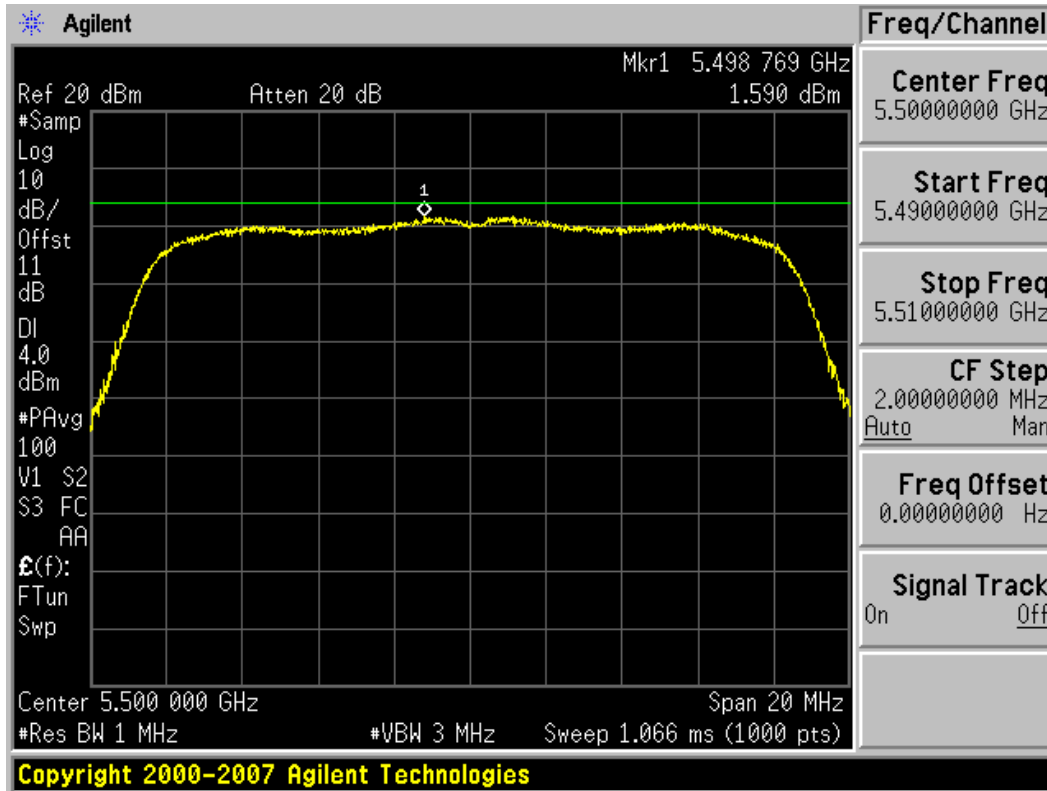


Plot 6-31. Peak Power Spectral Density Plot (802.11a (UNII Band 3) – Ch. 100)

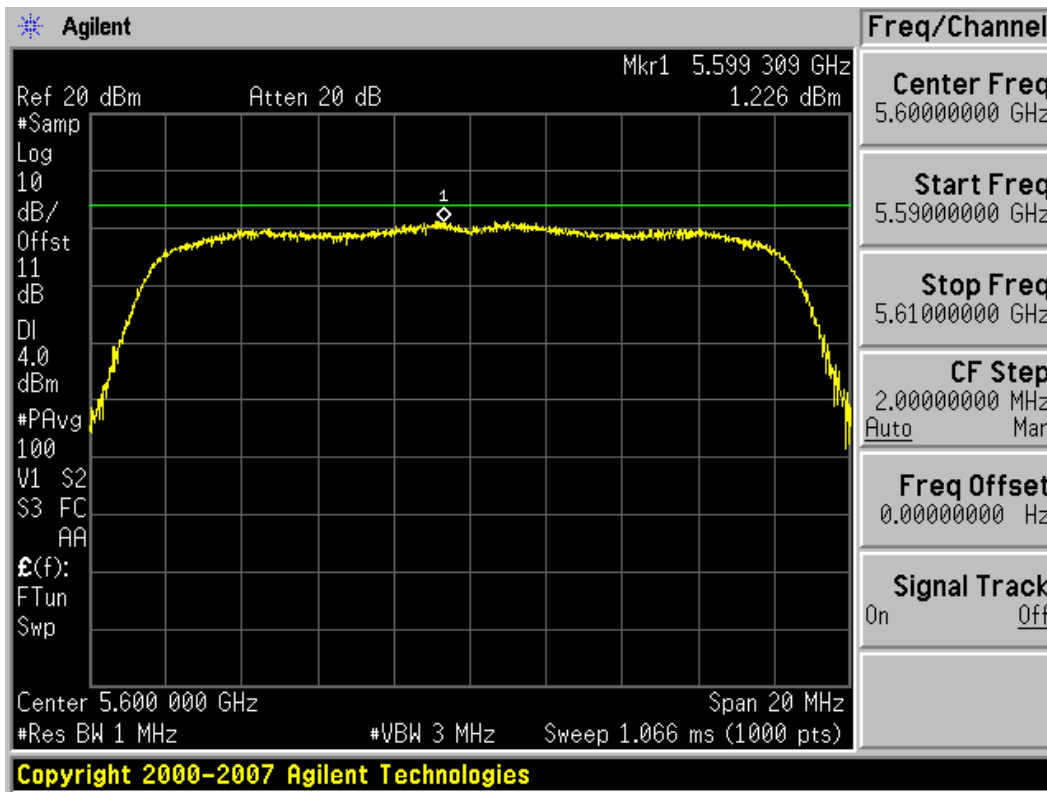


Plot 6-32. Peak Power Spectral Density Plot (802.11a (UNII Band 3) – Ch. 120)

FCC ID: A3LSWDSC04D		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1110181834.A3L	Test Dates: October 26 - 28, 2011	EUT Type: Portable Handset		Page 31 of 73

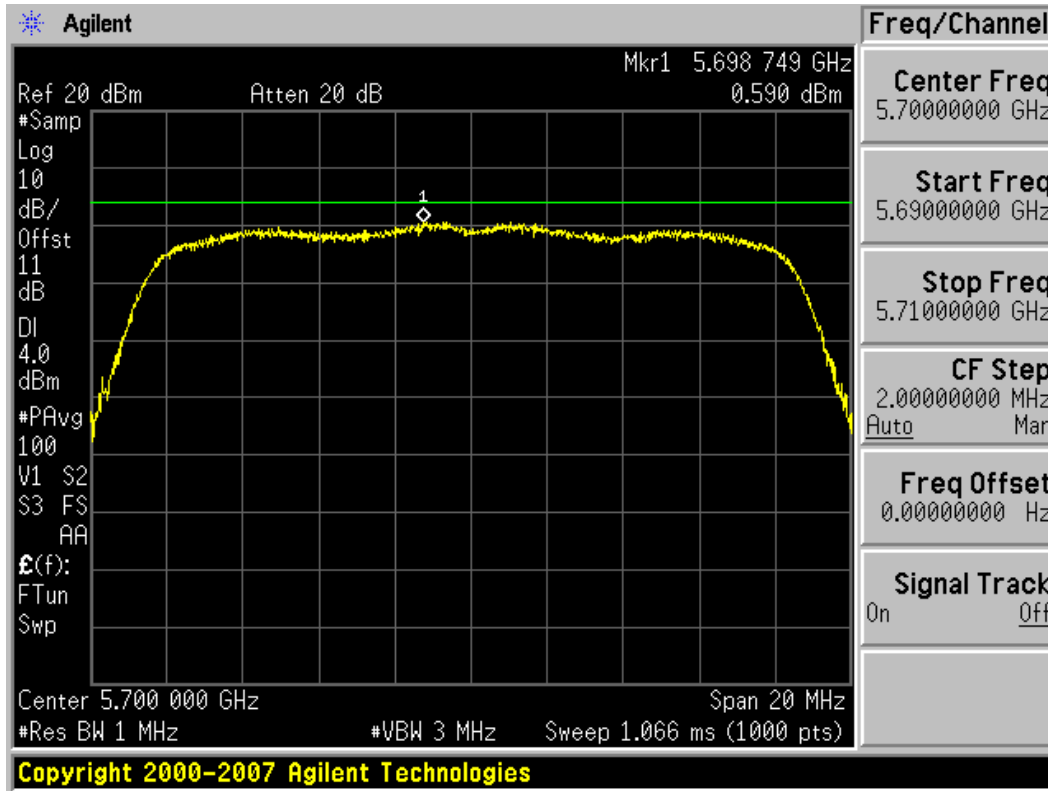


**Plot 6-33. Peak Power Spectral Density Plot (802.11a (UNII Band 3) – Ch. 140)**

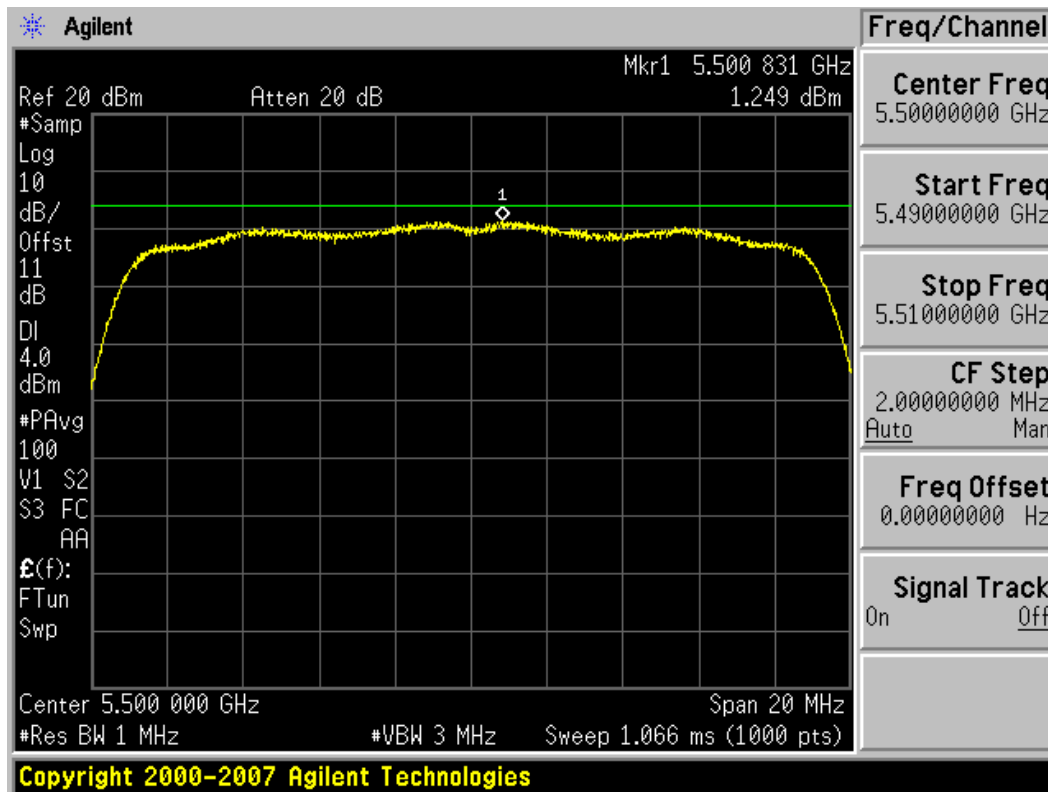


**Plot 6-34. Peak Power Spectral Density Plot (802.11n (UNII Band 3) – Ch. 100)**

FCC ID: A3LSWDSC04D		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1110181834.A3L	Test Dates: October 26 - 28, 2011	EUT Type: Portable Handset	Page 32 of 73	

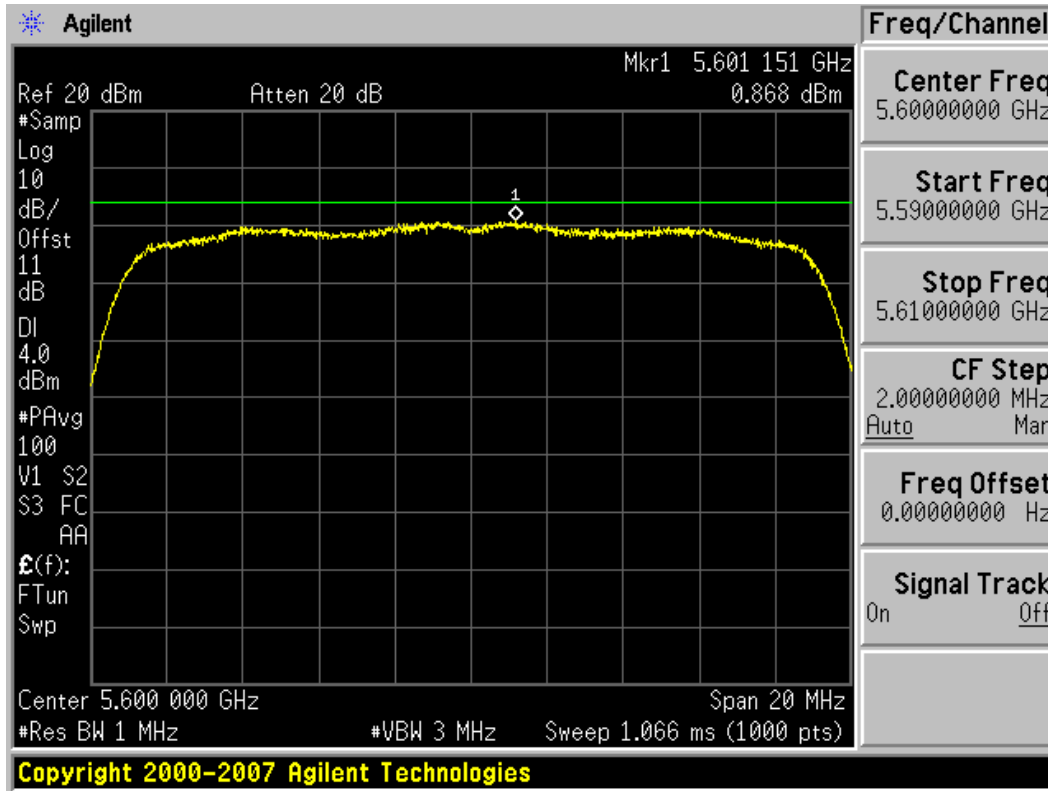

Plot 6-35. Peak Power Spectral Density Plot (802.11n (UNII Band 3) – Ch. 120)

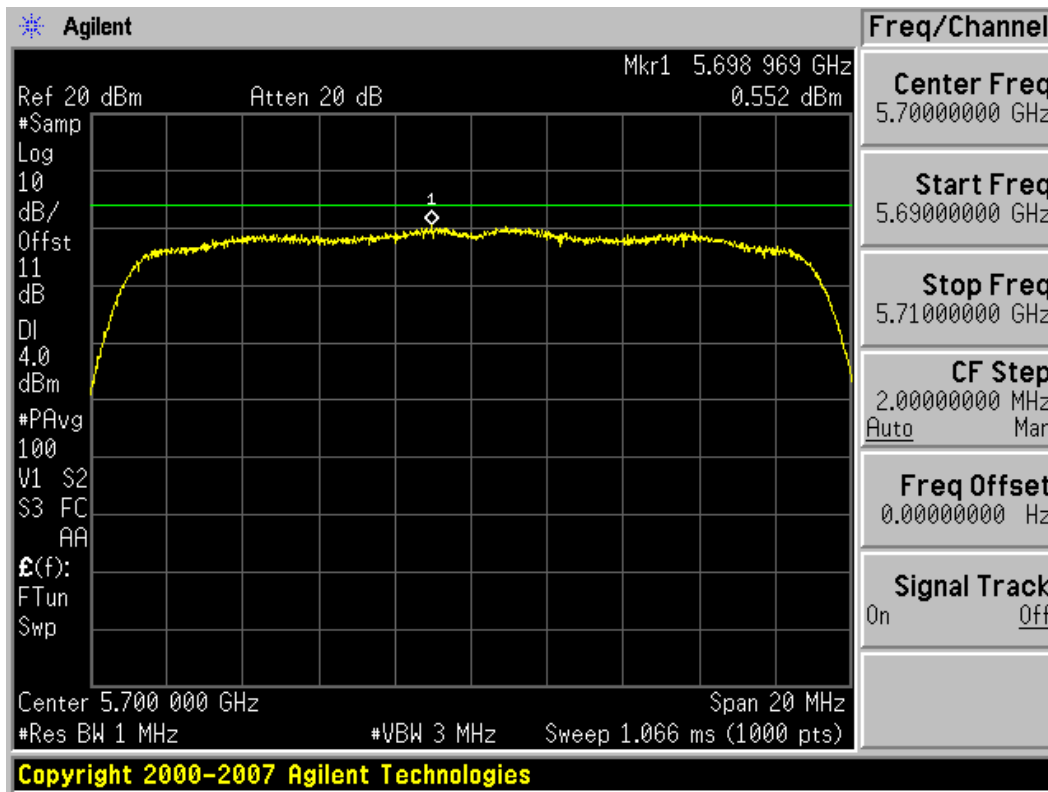

Plot 6-36. Peak Power Spectral Density Plot (802.11n (UNII Band 3) – Ch. 140)

FCC ID: A3LSWDSC04D		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1110181834.A3L	Test Dates: October 26 - 28, 2011	EUT Type: Portable Handset		Page 33 of 73

## 6.7 Peak Excursion Ratio

### §15.407(a)(6)

The spectrum analyzer was connected to the antenna terminal while the EUT was operating in the continuous transmission mode at the appropriate center frequencies. **The largest permissible difference between the modulation envelope (measured using a peak hold function) and the maximum conducted output power is 13 dBm/MHz.**

	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Peak Excursion Ratio [dBm]	Max Permissible Peak Excursion Ratio [dBm/MHz]	Margin [dB]
Band I	5180	36	a	6	8.901	13.0	-4.10
	5200	40	a	6	8.507	13.0	-4.49
	5240	48	a	6	9.247	13.0	-3.75
	5180	36	n	6.5/7.2 (MCS0)	9.589	13.0	-3.41
	5200	40	n	6.5/7.2 (MCS0)	8.786	13.0	-4.21
	5240	48	n	6.5/7.2 (MCS0)	8.720	13.0	-4.28
Band II	5260	52	a	6	8.175	13.0	-4.83
	5280	56	a	6	7.774	13.0	-5.23
	5320	64	a	6	8.705	13.0	-4.30
	5260	52	n	6.5/7.2 (MCS0)	8.439	13.0	-4.56
	5280	56	n	6.5/7.2 (MCS0)	8.952	13.0	-4.05
	5320	64	n	6.5/7.2 (MCS0)	9.570	13.0	-3.43
Band III	5500	100	a	6	8.341	13.0	-4.66
	5600	120	a	6	9.449	13.0	-3.55
	5700	140	a	6	7.950	13.0	-5.05
	5500	100	n	6.5/7.2 (MCS0)	8.510	13.0	-4.49
	5600	120	n	6.5/7.2 (MCS0)	7.405	13.0	-5.60
	5700	140	n	6.5/7.2 (MCS0)	7.937	13.0	-5.06

Table 6-10. Conducted Peak Excursion Ratio Measurements





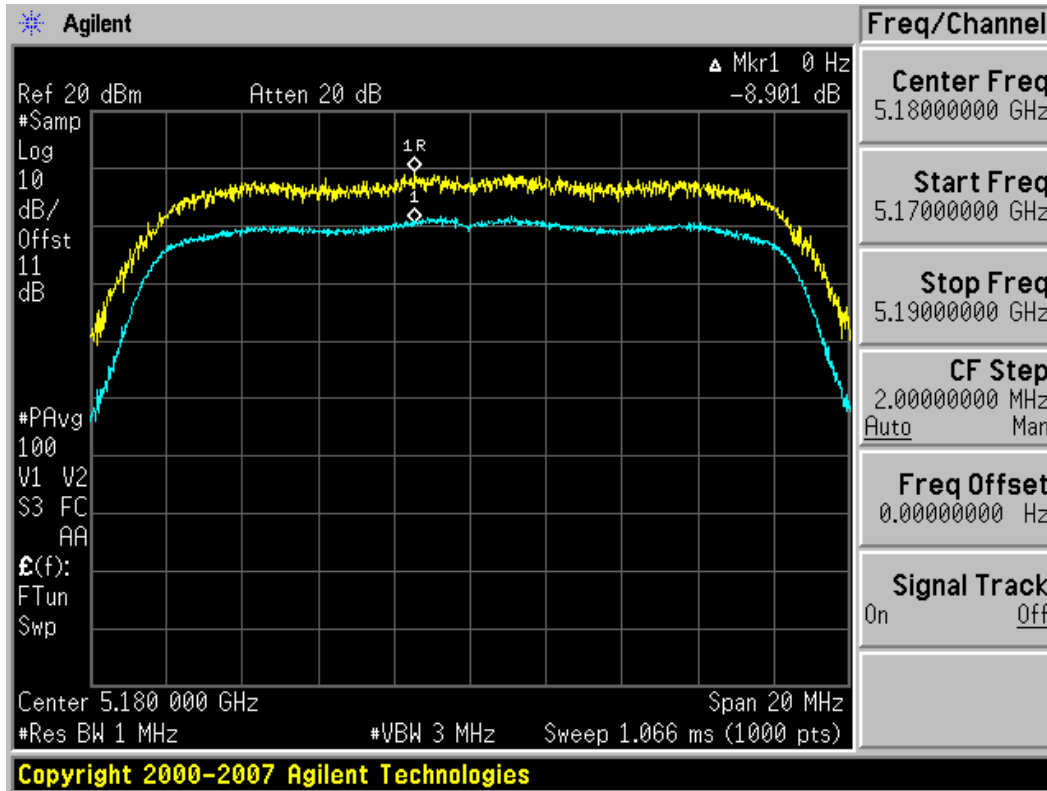


Figure 6-3. Test Instrument & Measurement Setup

FCC ID: A3LSWDSC04D		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1110181834.A3L	Test Dates: October 26 - 28, 2011	EUT Type: Portable Handset	Page 34 of 73	

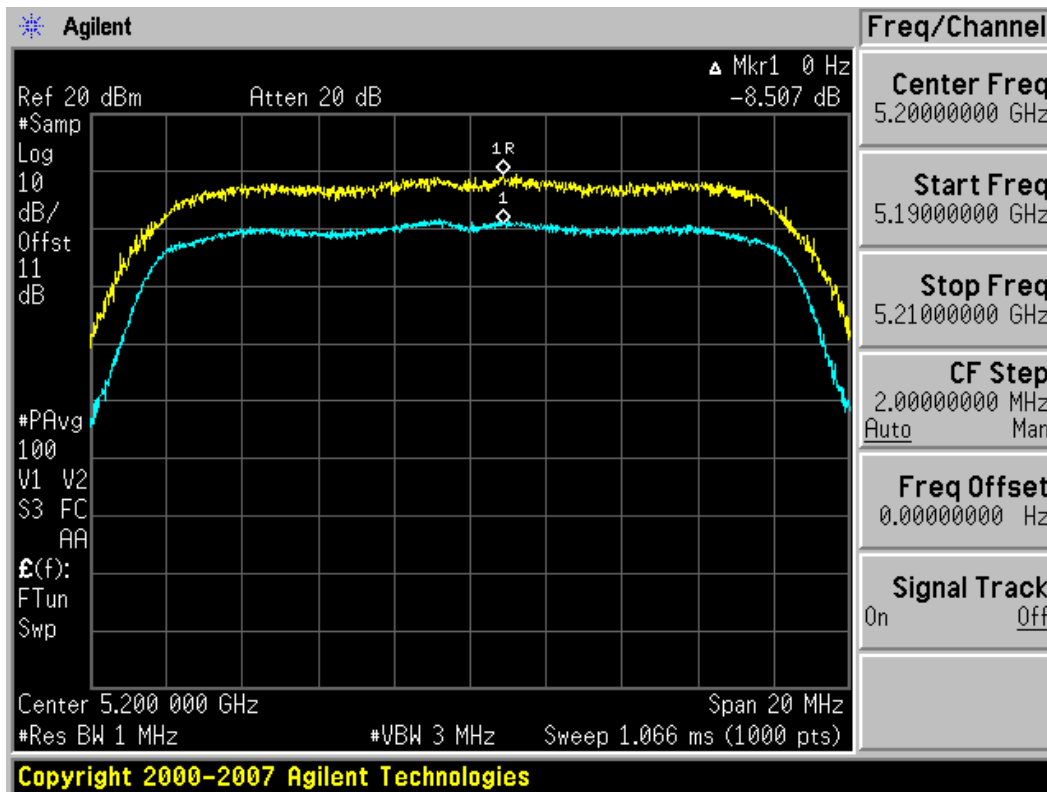


**Plot 6-37. Peak Excursion Ratio Plot (802.11a (UNII Band 1) – Ch. 36)**




**Plot 6-38. Peak Excursion Ratio Plot (802.11a (UNII Band 1) – Ch. 40)**

FCC ID: A3LSWDSC04D		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1110181834.A3L	Test Dates: October 26 - 28, 2011	EUT Type: Portable Handset	Page 35 of 73	

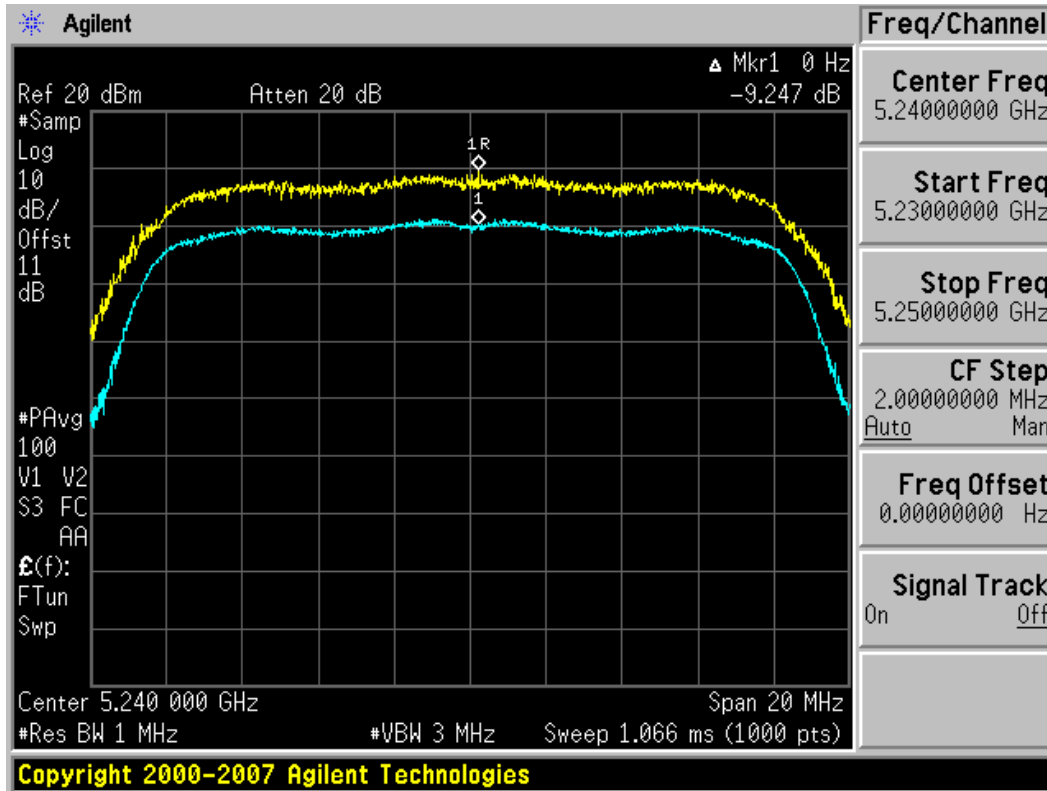


Plot 6-39. Peak Excursion Ratio Plot (802.11a (UNII Band 1) – Ch. 48)

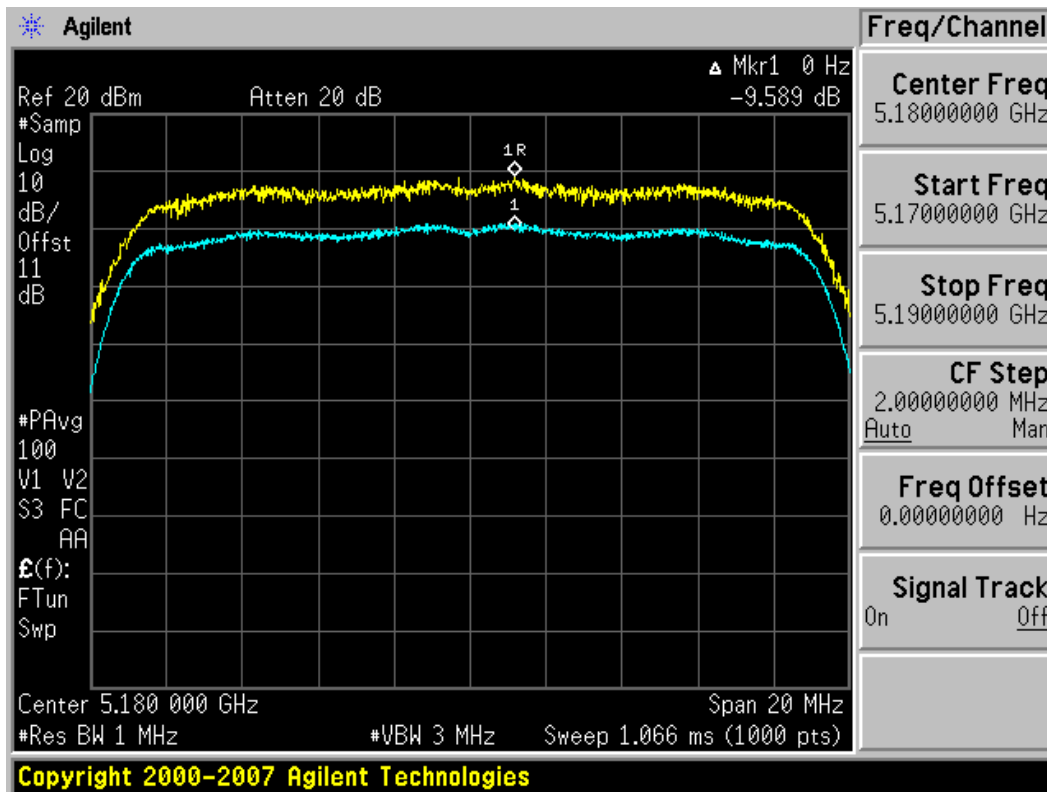


Plot 6-40. Peak Excursion Ratio Plot (802.11n (UNII Band 1) – Ch. 36)

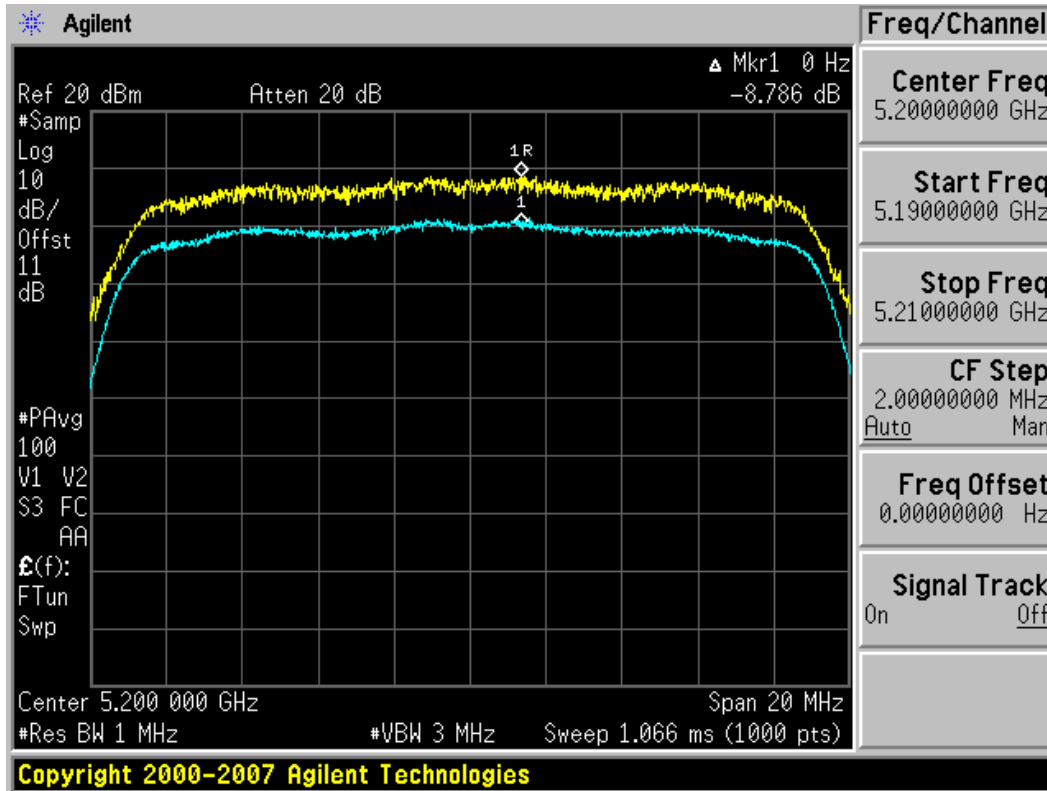

FCC ID: A3LSWDSC04D		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1110181834.A3L	Test Dates: October 26 - 28, 2011	EUT Type: Portable Handset	Page 36 of 73	

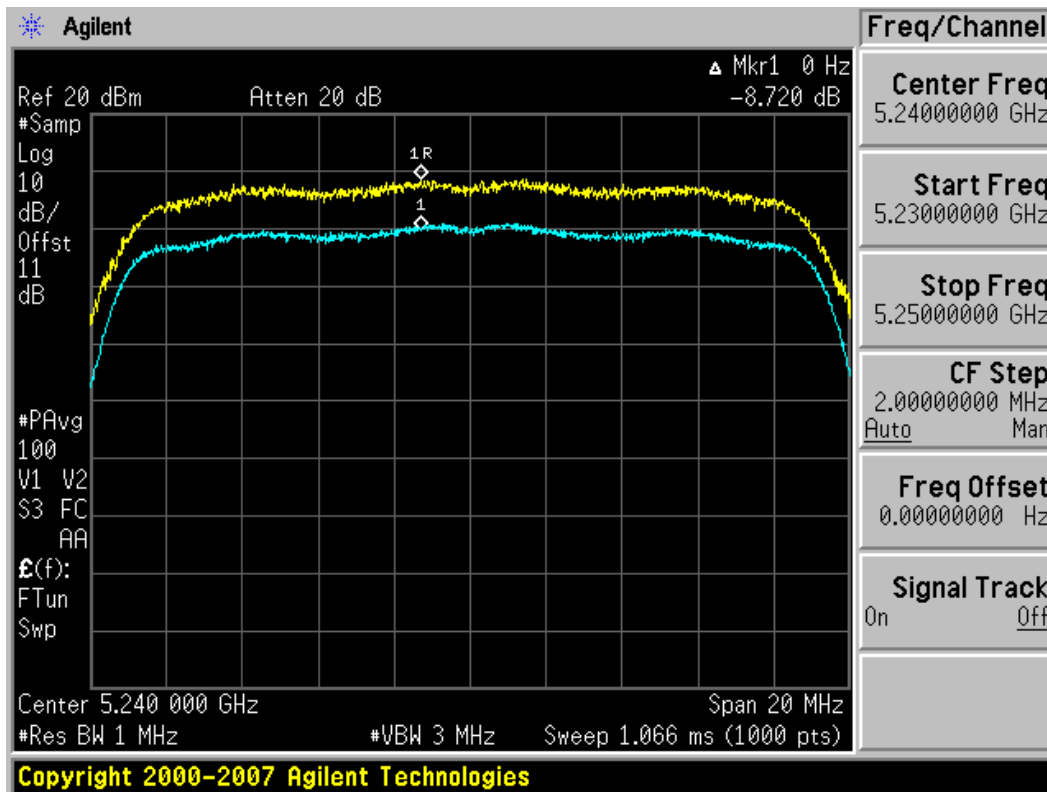


**Plot 6-41. Peak Excursion Ratio Plot (802.11n (UNII Band 1) – Ch. 40)**




**Plot 6-42. Peak Excursion Ratio Plot (802.11n (UNII Band 1) – Ch. 48)**

FCC ID: A3LSWDSC04D		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1110181834.A3L	Test Dates: October 26 - 28, 2011	EUT Type: Portable Handset	Page 37 of 73	

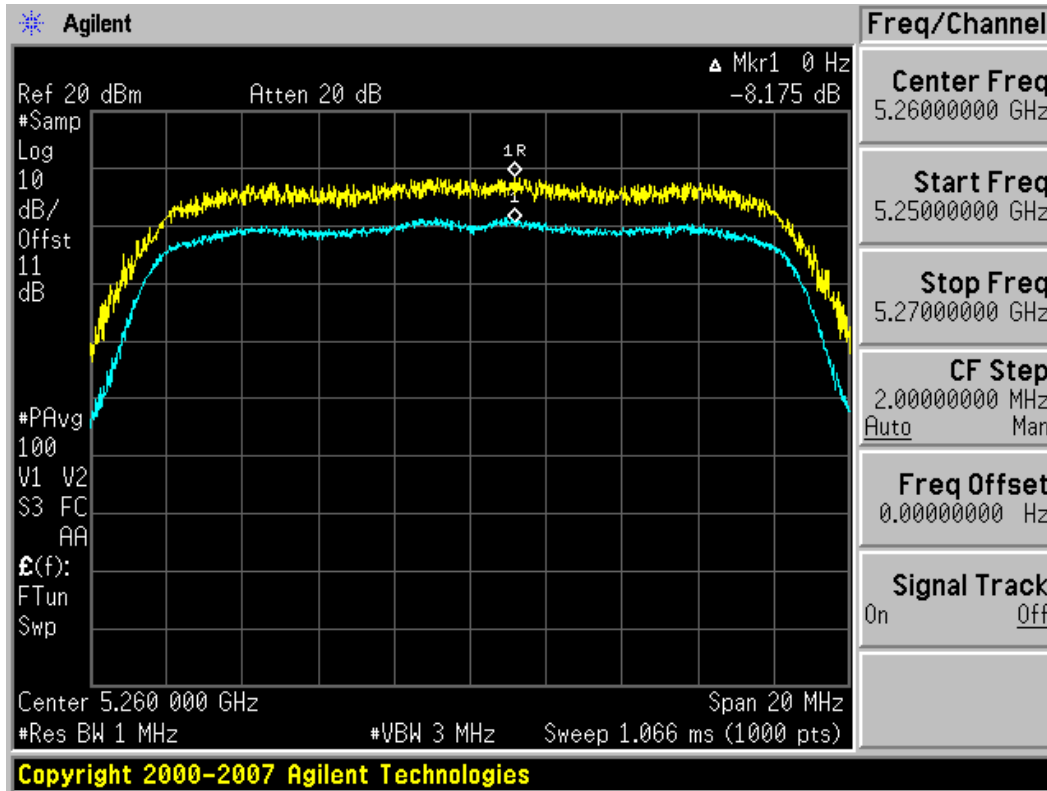


Plot 6-43. Peak Excursion Ratio Plot (802.11a (UNII Band 2) – Ch. 52)

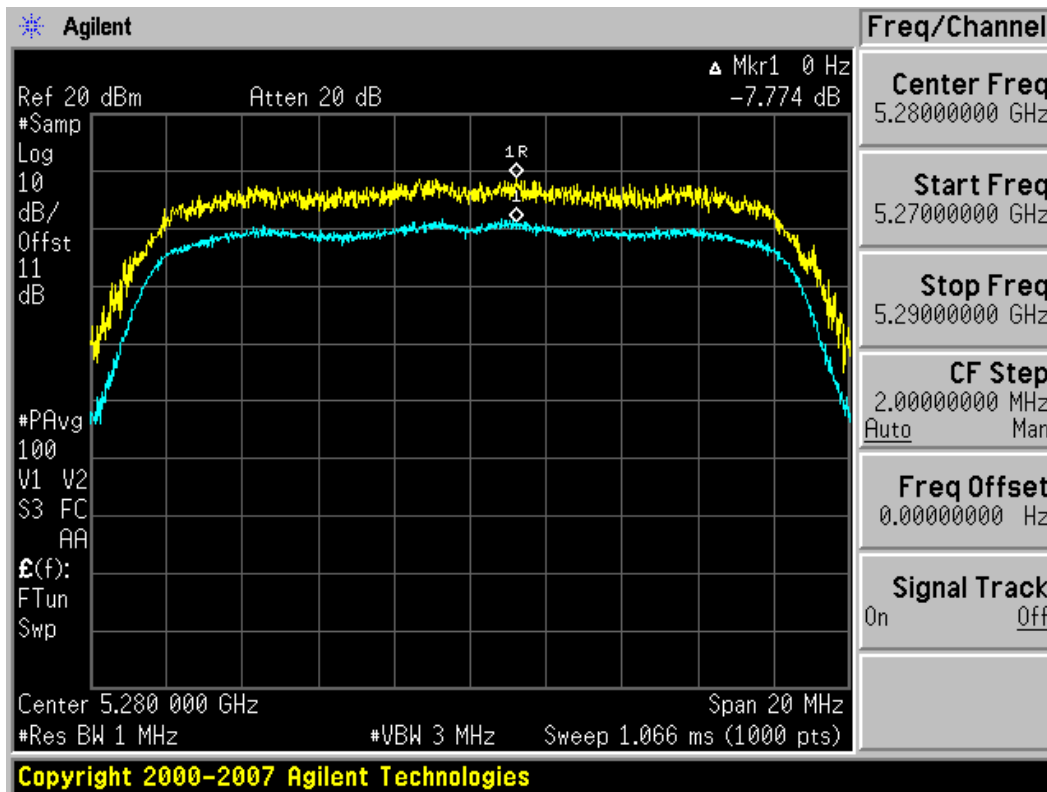


Plot 6-44. Peak Excursion Ratio Plot (802.11a (UNII Band 2) – Ch. 56)

FCC ID: A3LSWDSC04D		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1110181834.A3L	Test Dates: October 26 - 28, 2011	EUT Type: Portable Handset		Page 38 of 73

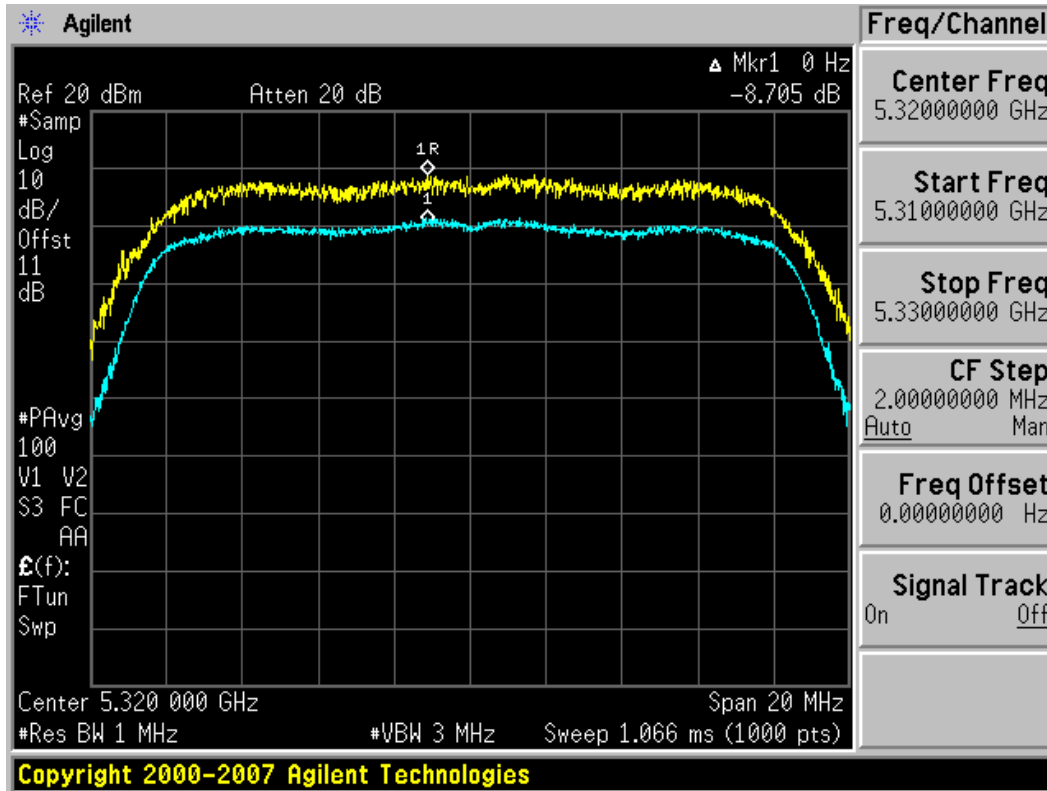


**Plot 6-45. Peak Excursion Ratio Plot (802.11a (UNII Band 2) – Ch. 64)**

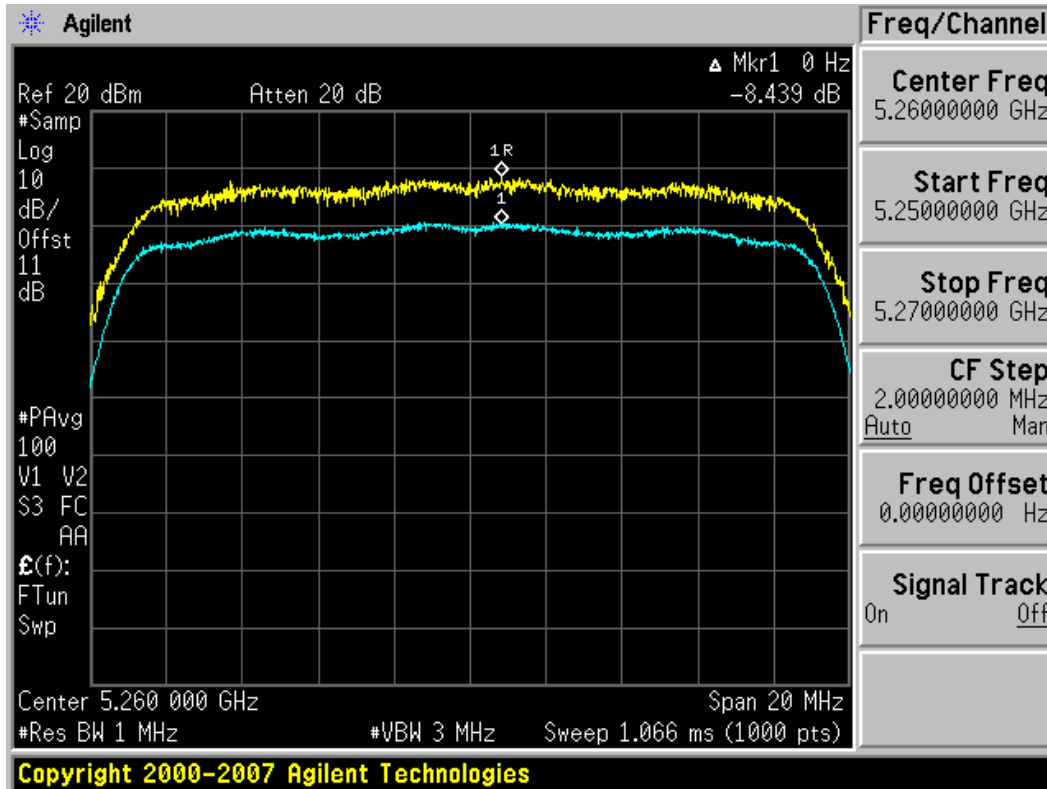


**Plot 6-46. Peak Excursion Ratio Plot (802.11n (UNII Band 2) – Ch. 52)**

FCC ID: A3LSWDSC04D		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1110181834.A3L	Test Dates: October 26 - 28, 2011	EUT Type: Portable Handset	Page 39 of 73	

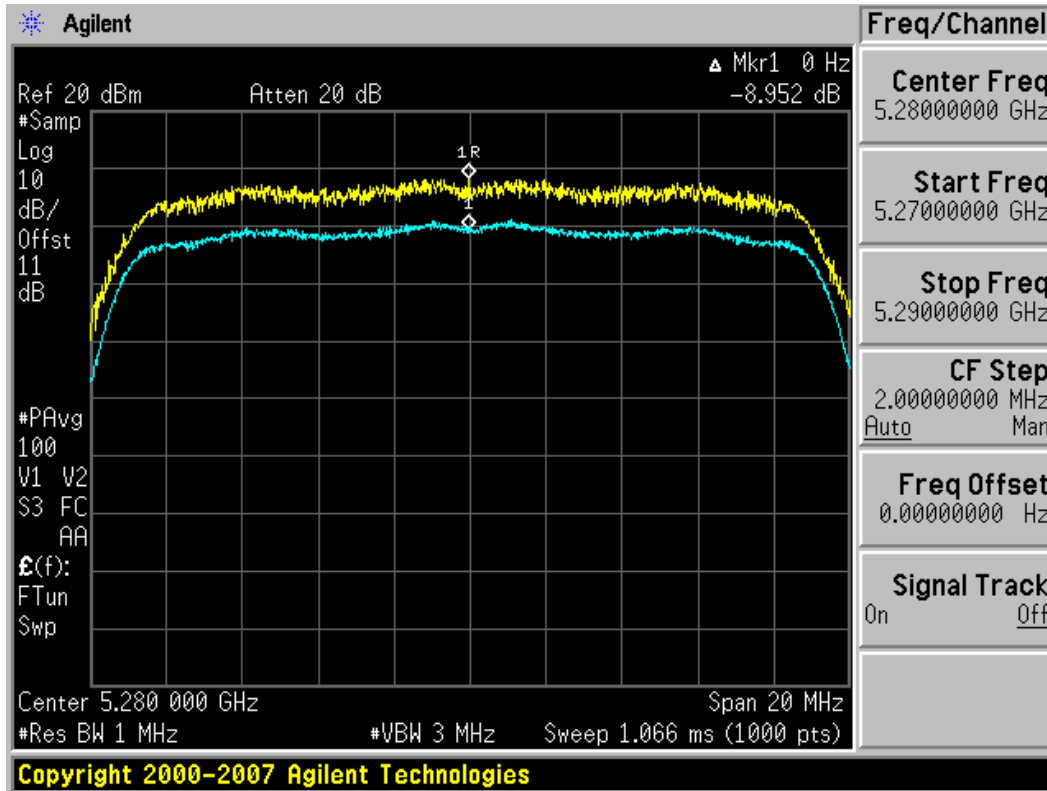


Plot 6-47. Peak Excursion Ratio Plot (802.11n (UNII Band 2) – Ch. 56)

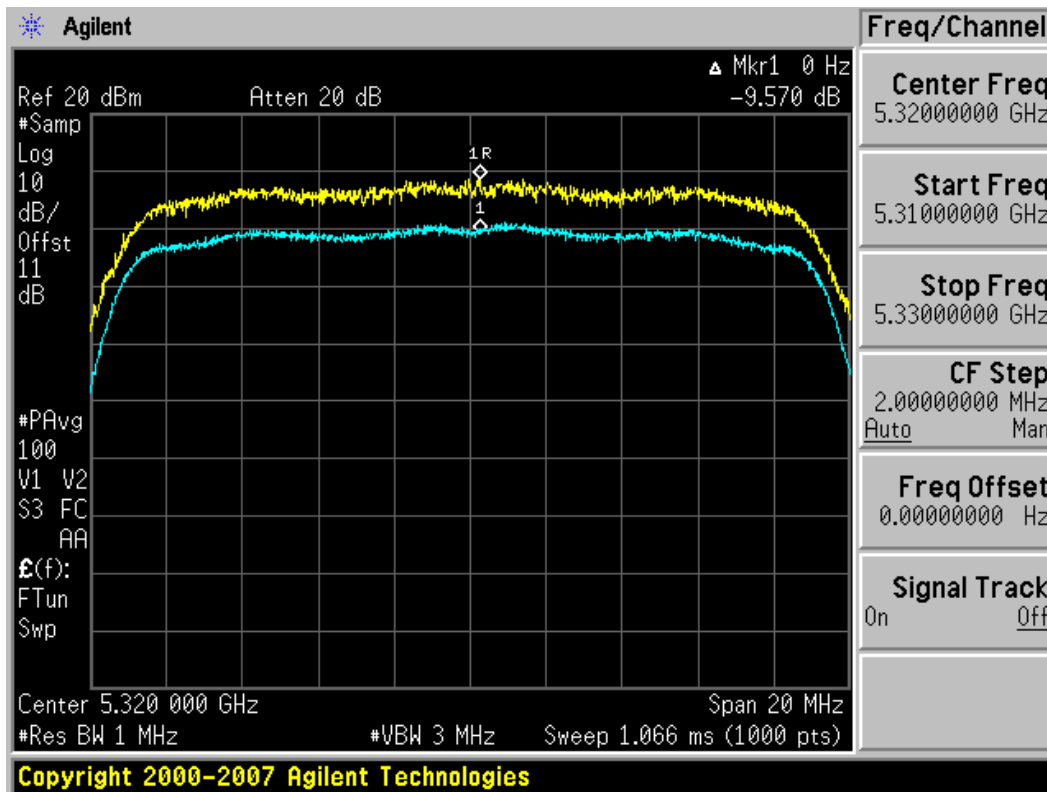


Plot 6-48. Peak Excursion Ratio Plot (802.11n (UNII Band 2) – Ch. 64)

FCC ID: A3LSWDSC04D		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1110181834.A3L	Test Dates: October 26 - 28, 2011	EUT Type: Portable Handset	Page 40 of 73	

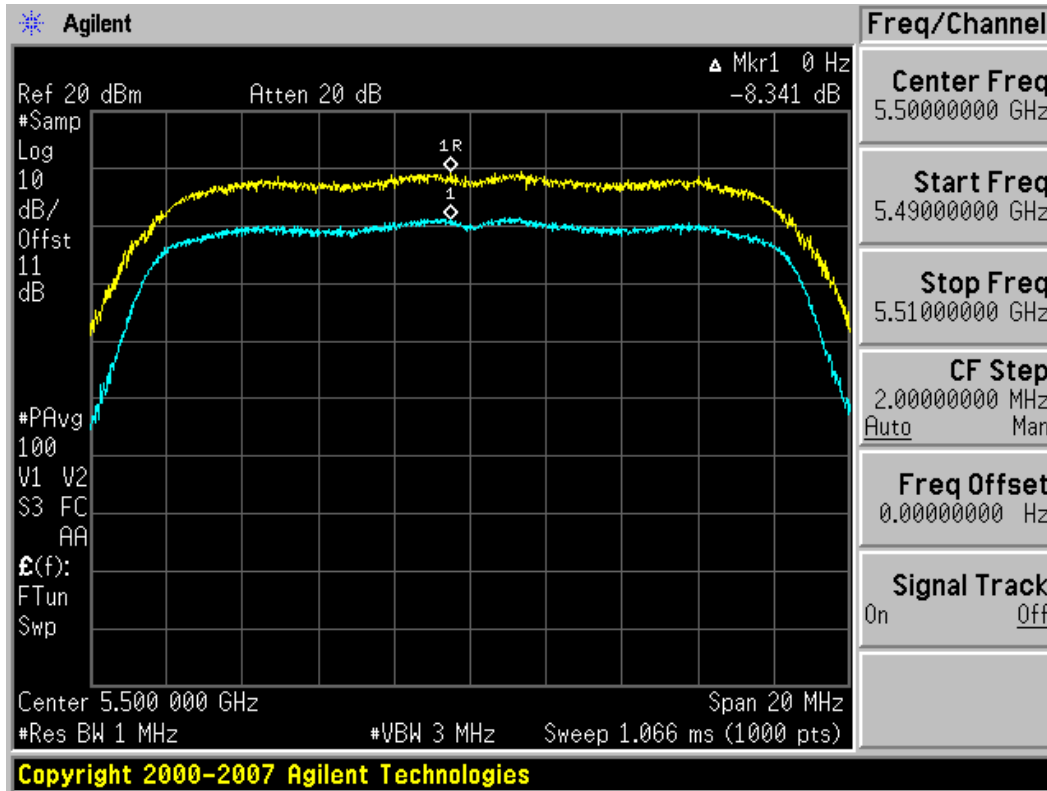


Plot 6-49. Peak Excursion Ratio Plot (802.11a (UNII Band 3) – Ch. 100)

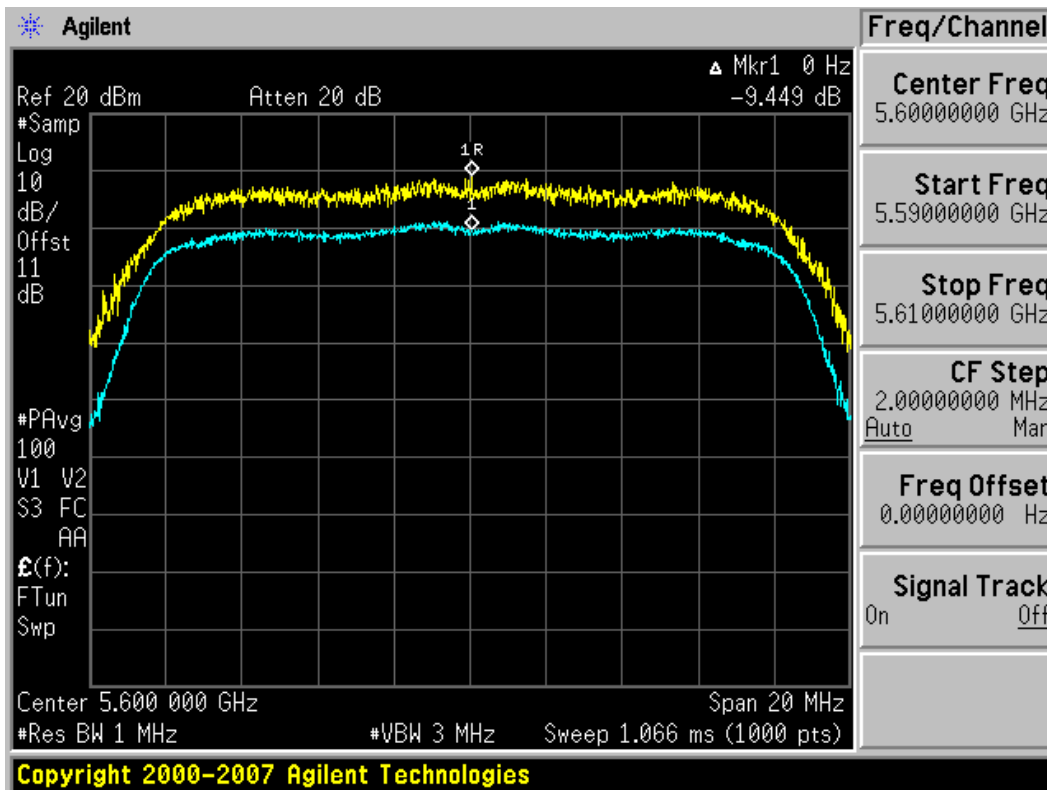


Plot 6-50. Peak Excursion Ratio Plot (802.11a (UNII Band 3) – Ch. 120)

FCC ID: A3LSWDSC04D		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1110181834.A3L	Test Dates: October 26 - 28, 2011	EUT Type: Portable Handset	Page 41 of 73	

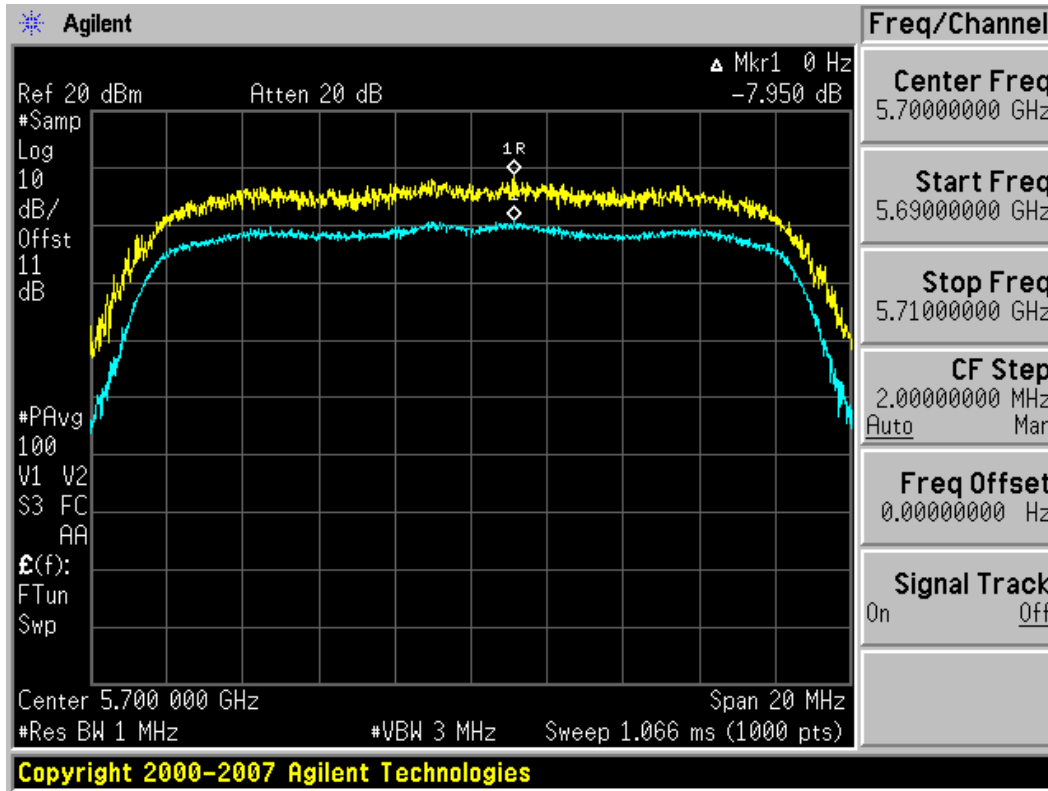


**Plot 6-51. Peak Excursion Ratio Plot (802.11a (UNII Band 3) – Ch. 140)**

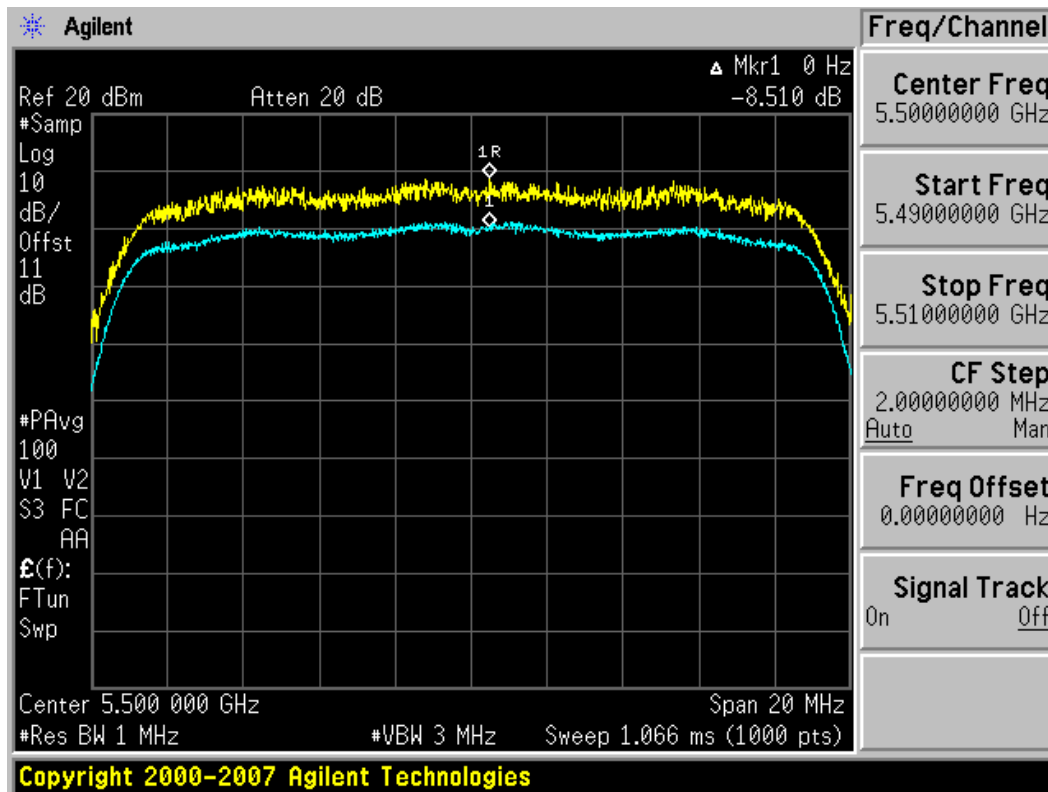


**Plot 6-52. Peak Excursion Ratio Plot (802.11n (UNII Band 3) – Ch. 100)**

FCC ID: A3LSWDSC04D		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1110181834.A3L	Test Dates: October 26 - 28, 2011	EUT Type: Portable Handset	Page 42 of 73	

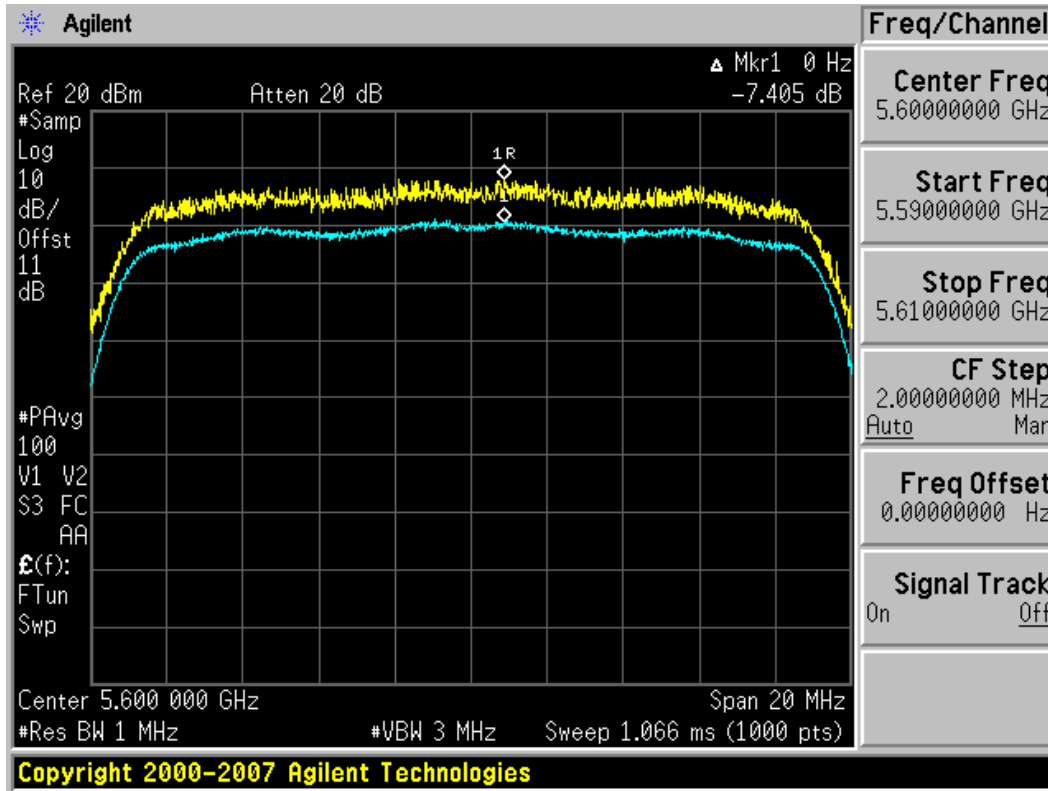

Plot 6-53. Peak Excursion Ratio Plot (802.11n (UNII Band 3) – Ch. 120)

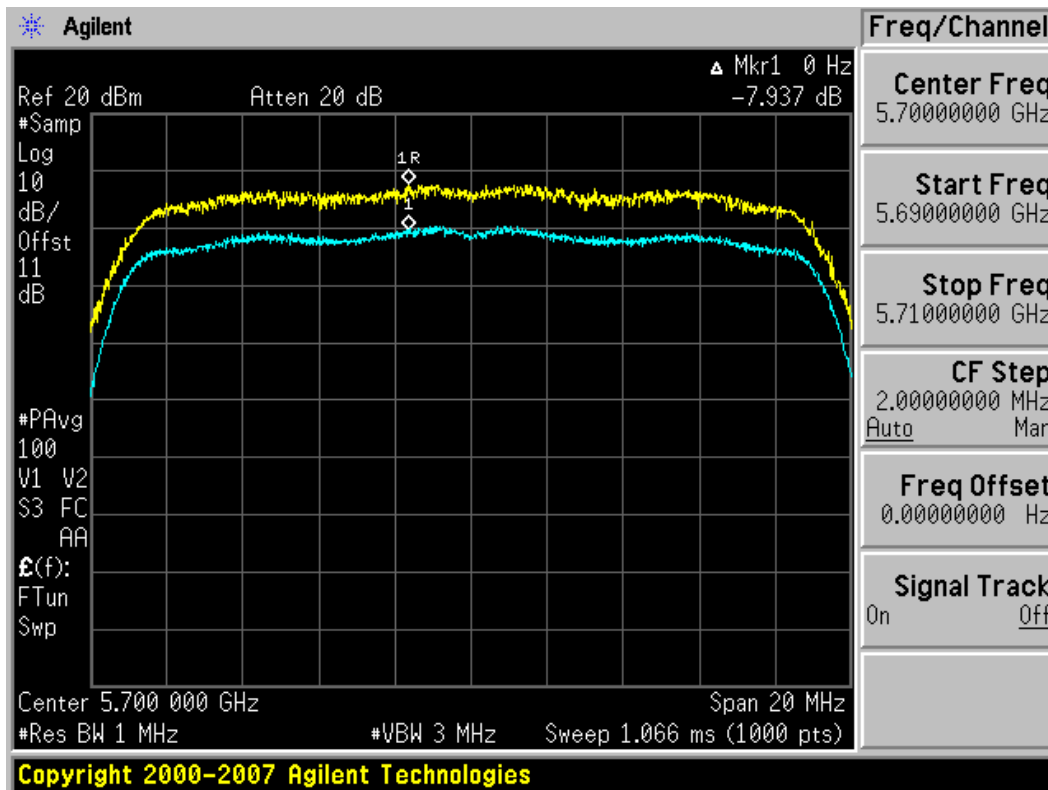

Plot 6-54. Peak Excursion Ratio Plot (802.11n (UNII Band 3) – Ch. 140)

FCC ID: A3LSWDSC04D		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1110181834.A3L	Test Dates: October 26 - 28, 2011	EUT Type: Portable Handset		Page 43 of 73

## 6.8 Frequency Stability



### §15.407(g)

The EUT was placed inside of an environmental chamber as the temperature in the chamber was varied between -30°C and +50°C. The temperature was incremented by 10° intervals and the unit was allowed to stabilize at each temperature before each measurement. The center frequency of the transmitting channel was evaluated at each temperature and the frequency deviation from the channel's center frequency was recorded.

OPERATING FREQUENCY: 5,180,000,000 Hz  
 CHANNEL: 36  
 REFERENCE VOLTAGE: 3.7 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.70	+ 20 (Ref)	5,179,999,984	-16	0.000000
100 %		- 30	5,180,000,021	21	0.000000
100 %		- 20	5,179,999,981	-19	0.000000
100 %		- 10	5,179,999,986	-14	0.000000
100 %		0	5,180,000,022	22	0.000000
100 %		+ 10	5,180,000,019	19	0.000000
100 %		+ 20	5,179,999,984	-16	0.000000
100 %		+ 30	5,179,999,980	-20	0.000000
100 %		+ 40	5,180,000,017	17	0.000000
100 %		+ 50	5,180,000,010	10	0.000000
115 %	4.26	+ 20	5,179,999,976	-24	0.000000
BATT. ENDPOINT	3.39	+ 20	5,179,999,973	-27	-0.000001

**Table 6-11. Frequency Stability Measurements for UNII Band 1 (Ch. 36)**

FCC ID: A3LSWDSC04D		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1110181834.A3L	Test Dates: October 26 - 28, 2011	EUT Type: Portable Handset	Page 44 of 73	

**Frequency Stability (Cont'd)**  
**§15.407(g)**

The EUT was placed inside of an environmental chamber as the temperature in the chamber was varied between -30°C and +50°C. The temperature was incremented by 10° intervals and the unit was allowed to stabilize at each temperature before each measurement. The center frequency of the transmitting channel was evaluated at each temperature and the frequency deviation from the channel's center frequency was recorded.

OPERATING FREQUENCY: 5,260,000,000 Hz  
 CHANNEL: 52  
 REFERENCE VOLTAGE: 3.7 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.70	+ 20 (Ref)	5,259,999,981	-19	0.000000
100 %		- 30	5,260,000,012	12	0.000000
100 %		- 20	5,260,000,017	17	0.000000
100 %		- 10	5,260,000,022	22	0.000000
100 %		0	5,259,999,976	-24	0.000000
100 %		+ 10	5,259,999,990	-10	0.000000
100 %		+ 20	5,259,999,981	-19	0.000000
100 %		+ 30	5,260,000,021	21	0.000000
100 %		+ 40	5,259,999,982	-18	0.000000
100 %		+ 50	5,259,999,984	-16	0.000000
115 %	4.26	+ 20	5,259,999,973	-27	-0.000001
BATT. ENDPOINT	3.39	+ 20	5,259,999,969	-31	-0.000001

**Table 6-12. Frequency Stability Measurements for UNII Band 2 (Ch. 52)**

## Frequency Stability (Cont'd)



### §15.407(g)

The EUT was placed inside of an environmental chamber as the temperature in the chamber was varied between -30°C and +50°C. The temperature was incremented by 10° intervals and the unit was allowed to stabilize at each temperature before each measurement. The center frequency of the transmitting channel was evaluated at each temperature and the frequency deviation from the channel's center frequency was recorded.

OPERATING FREQUENCY: 5,500,000,000 Hz  
 CHANNEL: 100  
 REFERENCE VOLTAGE: 3.7 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.70	+ 20 (Ref)	5,499,999,979	-21	0.000000
100 %		- 30	5,499,999,988	-12	0.000000
100 %		- 20	5,500,000,019	19	0.000000
100 %		- 10	5,499,999,984	-16	0.000000
100 %		0	5,499,999,982	-18	0.000000
100 %		+ 10	5,499,999,976	-24	0.000000
100 %		+ 20	5,499,999,979	-21	0.000000
100 %		+ 30	5,499,999,981	-19	0.000000
100 %		+ 40	5,499,999,978	-22	0.000000
100 %		+ 50	5,499,999,986	-14	0.000000
115 %	4.26	+ 20	5,499,999,979	-21	0.000000
BATT. ENDPOINT	3.39	+ 20	5,499,999,976	-24	0.000000

**Table 6-13. Frequency Stability Measurements for UNII Band 3 (Ch. 100)**

FCC ID: A3LSWDSC04D		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1110181834.A3L	Test Dates: October 26 - 28, 2011	EUT Type: Portable Handset	Page 46 of 73	

## 6.9 Radiated Spurious Emission Measurements

§15.407(b)(1), (6), §15.205, §15.209; RSS-210 [A9.2]

The EUT was tested from 9kHz and up to the 10<sup>th</sup> harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHZ. Above 1 GHz, average measurements were taken using RBW = 1MHz and VBW = 10Hz. Peak measurements were taken using RBW = VBW = 1MHz and linearly polarized horn antennas. All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table 6-14 per Section 15.209.

All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

Frequency	Field Strength [ $\mu\text{V/m}$ ]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3



**Table 6-14. Radiated Limits**

### Sample Calculation

- Field Strength Level [ $\text{dB}\mu\text{V/m}$ ] = Analyzer Level [ $\text{dBm}$ ] + 107 + AFCL [ $\text{dB}$ ]

### Notes:

- AFCL = Antenna Factor [ $\text{dB}$ ] + Cable Loss [ $\text{dB}$ ]

FCC ID: A3LSWDSC04D		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1110181834.A3L	Test Dates: October 26 - 28, 2011	EUT Type: Portable Handset	Page 47 of 73	

**Radiated Spurious Emission Measurements (Cont'd)**  
**§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]**



Mode: 802.11a  
 Transfer Rate: 6 Mbps  
 Distance of Measurements: 1 Meter  
 Operating Frequency: 5180MHz  
 Channel: 36

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10360.00	-94.27	Peak	H	53.88	-9.54	57.07	68.20	-11.13
* 15540.00	-135.00	Average	H	61.39	0.00	33.39	53.98	-20.59
* 15540.00	-125.00	Peak	H	61.39	0.00	43.39	73.98	-30.59
* 20720.00	-135.00	Average	H	58.41	0.00	30.41	53.98	-23.57
* 20720.00	-125.00	Peak	H	58.41	0.00	40.41	73.98	-33.57
25900.00	-125.00	Peak	H	60.26	0.00	42.26	68.20	-25.94

**Table 6-15. Radiated Measurements @ 1 meter**

**NOTES:**

- All harmonics that do not lie in a restricted band are subject to a peak limit of -27dBm/MHz.
- All emissions that lie in the restricted bands (denoted by a \* next to the frequency) specified in §15.205 are below the limit shown in Table 6-14.
- Average measurements > 1GHz using RBW = 1MHz and VBW = 10Hz. Peak measurements > 1GHz using RBW = VBW = 1MHz.
- The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
- The EUT is supplied with nominal AC voltage and/or a new/fully-recharged battery.
- The spectrum is measured from 9kHz to 40GHz and the worst-case emissions are reported. No significant emissions were found beyond the fifth harmonic for this device.
- Levels at - 135 dBm represent the analyzer noise floor and signify that no emission was detected.
- Above 960MHz the limit is 500 μV/m (54dBμ/m) at 3 meters radiated for emissions that lie in restricted bands specified in §15.205.

FCC ID: A3LSWDSC04D		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1110181834.A3L	Test Dates: October 26 - 28, 2011	EUT Type: Portable Handset	Page 48 of 73	

**Radiated Spurious Emission Measurements (Cont'd)**  
**§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]**



Mode: 802.11a  
 Transfer Rate: 6 Mbps  
 Distance of Measurements: 1 Meter  
 Operating Frequency: 5200MHz  
 Channel: 40

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10400.00	-95.62	Peak	H	53.93	-9.54	55.78	68.20	-12.42
* 15600.00	-135.00	Average	H	61.39	0.00	33.39	53.98	-20.59
* 15600.00	-125.00	Peak	H	61.39	0.00	43.39	73.98	-30.59
* 20800.00	-135.00	Average	H	58.47	0.00	30.47	53.98	-23.51
* 20800.00	-125.00	Peak	H	58.47	0.00	40.47	73.98	-33.51
26000.00	-125.00	Peak	H	60.28	0.00	42.28	68.20	-25.92

**Table 6-16. Radiated Measurements @ 1 meter**

**NOTES:**

- All harmonics that do not lie in a restricted band are subject to a peak limit of -27dBm/MHz.
- All emissions that lie in the restricted bands (denoted by a \* next to the frequency) specified in §15.205 are below the limit shown in Table 6-14.
- Average measurements > 1GHz using RBW = 1MHz and VBW = 10Hz. Peak measurements > 1GHz using RBW = VBW = 1MHz.
- The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
- The EUT is supplied with nominal AC voltage and/or a new/fully-recharged battery.
- The spectrum is measured from 9kHz to 40GHz and the worst-case emissions are reported. No significant emissions were found beyond the fifth harmonic for this device.
- Levels at - 135 dBm represent the analyzer noise floor and signify that no emission was detected.
- Above 960MHz the limit is 500 μV/m (54dBμ/m) at 3 meters radiated for emissions that lie in restricted bands specified in §15.205.

FCC ID: A3LSWDSC04D		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1110181834.A3L	Test Dates: October 26 - 28, 2011	EUT Type: Portable Handset	Page 49 of 73	

**Radiated Spurious Emission Measurements (Cont'd)**  
**§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]**



Mode: 802.11a  
 Transfer Rate: 6 Mbps  
 Distance of Measurements: 1 Meter  
 Operating Frequency: 5240MHz  
 Channel: 48

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10480.00	-95.57	Peak	H	54.07	-9.54	55.96	68.20	-12.24
* 15720.00	-135.00	Average	H	61.32	0.00	33.32	53.98	-20.66
* 15720.00	-125.00	Peak	H	61.32	0.00	43.32	73.98	-30.66
* 20960.00	-135.00	Average	H	58.60	0.00	30.60	53.98	-23.38
* 20960.00	-125.00	Peak	H	58.60	0.00	40.60	73.98	-33.38
26200.00	-125.00	Peak	H	60.24	0.00	42.24	68.20	-25.96

**Table 6-17. Radiated Measurements @ 1 meter**

**NOTES:**

- All harmonics that do not lie in a restricted band are subject to a peak limit of -27dBm/MHz.
- All emissions that lie in the restricted bands (denoted by a \* next to the frequency) specified in §15.205 are below the limit shown in Table 6-14.
- Average measurements > 1GHz using RBW = 1MHz and VBW = 10Hz. Peak measurements > 1GHz using RBW = VBW = 1MHz.
- The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
- The EUT is supplied with nominal AC voltage and/or a new/fully-recharged battery.
- The spectrum is measured from 9kHz to 40GHz and the worst-case emissions are reported. No significant emissions were found beyond the fifth harmonic for this device.
- Levels at - 135 dBm represent the analyzer noise floor and signify that no emission was detected.
- Above 960MHz the limit is 500 μV/m (54dBμ/m) at 3 meters radiated for emissions that lie in restricted bands specified in §15.205.

FCC ID: A3LSWDSC04D		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1110181834.A3L	Test Dates: October 26 - 28, 2011	EUT Type: Portable Handset	Page 50 of 73	

**Radiated Spurious Emission Measurements (Cont'd)**  
**§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]**



Mode: 802.11a  
 Transfer Rate: 6 Mbps  
 Distance of Measurements: 1 Meter  
 Operating Frequency: 5260MHz  
 Channel: 52

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10520.00	-95.69	Peak	H	54.14	-9.54	55.90	68.20	-12.30
* 15780.00	-135.00	Average	H	61.11	0.00	33.11	53.98	-20.87
* 15780.00	-125.00	Peak	H	61.11	0.00	43.11	73.98	-30.87
* 21040.00	-135.00	Average	H	58.65	0.00	30.65	53.98	-23.33
* 21040.00	-125.00	Peak	H	58.65	0.00	40.65	73.98	-33.33
26300.00	-125.00	Peak	H	60.22	0.00	42.22	68.20	-25.98

**Table 6-18. Radiated Measurements @ 1 meter**

**NOTES:**

- All harmonics that do not lie in a restricted band are subject to a peak limit of -27dBm/MHz.
- All emissions that lie in the restricted bands (denoted by a \* next to the frequency) specified in §15.205 are below the limit shown in Table 6-14.
- Average measurements > 1GHz using RBW = 1MHz and VBW = 10Hz. Peak measurements > 1GHz using RBW = VBW = 1MHz.
- The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
- The EUT is supplied with nominal AC voltage and/or a new/fully-recharged battery.
- The spectrum is measured from 9kHz to 40GHz and the worst-case emissions are reported. No significant emissions were found beyond the fifth harmonic for this device.
- Levels at - 135 dBm represent the analyzer noise floor and signify that no emission was detected.
- Above 960MHz the limit is 500 μV/m (54dBμ/m) at 3 meters radiated for emissions that lie in restricted bands specified in §15.205.

FCC ID: A3LSWDSC04D		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1110181834.A3L	Test Dates: October 26 - 28, 2011	EUT Type: Portable Handset	Page 51 of 73	

**Radiated Spurious Emission Measurements (Cont'd)**  
**§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]**

Mode: 802.11a

Transfer Rate: 6 Mbps

Distance of Measurements: 1 Meter

Operating Frequency: 5280MHz



Channel: 56

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10560.00	-96.03	Peak	H	54.20	-9.54	55.62	68.20	-12.58
* 15840.00	-135.00	Average	H	60.92	0.00	32.92	53.98	-21.06
* 15840.00	-125.00	Peak	H	60.92	0.00	42.92	73.98	-31.06
* 21120.00	-135.00	Average	H	58.70	0.00	30.70	53.98	-23.28
* 21120.00	-125.00	Peak	H	58.70	0.00	40.70	73.98	-33.28
26400.00	-125.00	Peak	H	60.20	0.00	42.20	68.20	-26.00

**Table 6-19. Radiated Measurements @ 1 meter**

**NOTES:**

- All harmonics that do not lie in a restricted band are subject to a peak limit of -27dBm/MHz.
- All emissions that lie in the restricted bands (denoted by a \* next to the frequency) specified in §15.205 are below the limit shown in Table 6-14.
- Average measurements > 1GHz using RBW = 1MHz and VBW = 10Hz. Peak measurements > 1GHz using RBW = VBW = 1MHz.
- The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
- The EUT is supplied with nominal AC voltage and/or a new/fully-recharged battery.
- The spectrum is measured from 9kHz to 40GHz and the worst-case emissions are reported. No significant emissions were found beyond the fifth harmonic for this device.
- Levels at - 135 dBm represent the analyzer noise floor and signify that no emission was detected.
- Above 960MHz the limit is 500 μV/m (54dBμ/m) at 3 meters radiated for emissions that lie in restricted bands specified in §15.205.

FCC ID: A3LSWDSC04D		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1110181834.A3L	Test Dates: October 26 - 28, 2011	EUT Type: Portable Handset	Page 52 of 73	

**Radiated Spurious Emission Measurements (Cont'd)**  
**§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]**



Mode: 802.11a  
 Transfer Rate: 6 Mbps  
 Distance of Measurements: 1 Meter  
 Operating Frequency: 5320MHz  
 Channel: 64

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 10640.00	-106.72	Average	H	54.31	-9.54	45.05	53.98	-8.93
* 10640.00	-95.82	Peak	H	54.31	-9.54	55.95	73.98	-18.03
* 15960.00	-135.00	Average	H	60.67	0.00	32.67	53.98	-21.31
* 15960.00	-125.00	Peak	H	60.67	0.00	42.67	73.98	-31.31
* 21280.00	-135.00	Average	H	58.80	0.00	30.80	53.98	-23.18
* 21280.00	-125.00	Peak	H	58.80	0.00	40.80	73.98	-33.18
26600.00	-125.00	Peak	H	60.20	0.00	42.20	68.20	-26.00

**Table 6-20. Radiated Measurements @ 1 meter**

**NOTES:**

- All harmonics that do not lie in a restricted band are subject to a peak limit of -27dBm/MHz.
- All emissions that lie in the restricted bands (denoted by a \* next to the frequency) specified in §15.205 are below the limit shown in Table 6-14.
- Average measurements > 1GHz using RBW = 1MHz and VBW = 10Hz. Peak measurements > 1GHz using RBW = VBW = 1MHz.
- The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
- The EUT is supplied with nominal AC voltage and/or a new/fully-recharged battery.
- The spectrum is measured from 9kHz to 40GHz and the worst-case emissions are reported. No significant emissions were found beyond the fifth harmonic for this device.
- Levels at - 135 dBm represent the analyzer noise floor and signify that no emission was detected.
- Above 960MHz the limit is 500 μV/m (54dBμ/m) at 3 meters radiated for emissions that lie in restricted bands specified in §15.205.

FCC ID: A3LSWDSC04D		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1110181834.A3L	Test Dates: October 26 - 28, 2011	EUT Type: Portable Handset	Page 53 of 73	

**Radiated Spurious Emission Measurements (Cont'd)**  
**§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]**



Mode: 802.11a  
 Transfer Rate: 6 Mbps  
 Distance of Measurements: 1 Meter  
 Operating Frequency: 5500MHz  
 Channel: 100

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11000.00	-106.83	Average	H	55.43	-9.54	46.06	53.98	-7.92
* 11000.00	-95.44	Peak	H	55.43	-9.54	57.45	73.98	-16.53
16500.00	-125.00	Peak	H	60.89	0.00	42.89	68.20	-25.31
22000.00	-125.00	Peak	H	58.82	0.00	40.82	68.20	-27.38
27500.00	-125.00	Peak	H	60.47	0.00	42.47	68.20	-25.73

**Table 6-21. Radiated Measurements @ 1 meter**

**NOTES:**

- All harmonics that do not lie in a restricted band are subject to a peak limit of -27dBm/MHz.
- All emissions that lie in the restricted bands (denoted by a \* next to the frequency) specified in §15.205 are below the limit shown in Table 6-14.
- Average measurements > 1GHz using RBW = 1MHz and VBW = 10Hz. Peak measurements > 1GHz using RBW = VBW = 1MHz.
- The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
- The EUT is supplied with nominal AC voltage and/or a new/fully-recharged battery.
- The spectrum is measured from 9kHz to 40GHz and the worst-case emissions are reported. No significant emissions were found beyond the fifth harmonic for this device.
- Levels at - 135 dBm represent the analyzer noise floor and signify that no emission was detected.
- Above 960MHz the limit is 500 μV/m (54dBμ/m) at 3 meters radiated for emissions that lie in restricted bands specified in §15.205.

FCC ID: A3LSWDSC04D		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1110181834.A3L	Test Dates: October 26 - 28, 2011	EUT Type: Portable Handset	Page 54 of 73	

**Radiated Spurious Emission Measurements (Cont'd)**  
**§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]**



Mode: 802.11a  
 Transfer Rate: 6 Mbps  
 Distance of Measurements: 1 Meter  
 Operating Frequency: 5600MHz  
 Channel: 120

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11200.00	-107.18	Average	H	55.69	-9.54	45.97	53.98	-8.01
* 11200.00	-96.15	Peak	H	55.69	-9.54	57.00	73.98	-16.98
16800.00	-125.00	Peak	H	61.46	0.00	43.46	68.20	-24.74
* 22400.00	-135.00	Average	H	59.06	0.00	31.06	53.98	-22.92
* 22400.00	-125.00	Peak	H	59.06	0.00	41.06	73.98	-32.92
28000.00	-125.00	Peak	H	60.46	0.00	42.46	68.20	-25.74

**Table 6-22. Radiated Measurements @ 1 meter**

**NOTES:**

- All harmonics that do not lie in a restricted band are subject to a peak limit of -27dBm/MHz.
- All emissions that lie in the restricted bands (denoted by a \* next to the frequency) specified in §15.205 are below the limit shown in Table 6-14.
- Average measurements > 1GHz using RBW = 1MHz and VBW = 10Hz. Peak measurements > 1GHz using RBW = VBW = 1MHz.
- The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
- The EUT is supplied with nominal AC voltage and/or a new/fully-recharged battery.
- The spectrum is measured from 9kHz to 40GHz and the worst-case emissions are reported. No significant emissions were found beyond the fifth harmonic for this device.
- Levels at - 135 dBm represent the analyzer noise floor and signify that no emission was detected.
- Above 960MHz the limit is 500 μV/m (54dBμ/m) at 3 meters radiated for emissions that lie in restricted bands specified in §15.205.

FCC ID: A3LSWDSC04D		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1110181834.A3L	Test Dates: October 26 - 28, 2011	EUT Type: Portable Handset	Page 55 of 73	

**Radiated Spurious Emission Measurements (Cont'd)**  
**§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]**



Mode: 802.11a  
 Transfer Rate: 6 Mbps  
 Distance of Measurements: 1 Meter  
 Operating Frequency: 5700MHz  
 Channel: 140

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11400.00	-107.33	Average	H	55.55	-9.54	45.68	53.98	-8.30
* 11400.00	-96.21	Peak	H	55.55	-9.54	56.80	73.98	-17.18
17100.00	-125.00	Peak	H	64.50	0.00	46.50	68.20	-21.70
* 22800.00	-135.00	Average	H	59.29	0.00	31.29	53.98	-22.69
* 22800.00	-125.00	Peak	H	59.29	0.00	41.29	73.98	-32.69
28500.00	-125.00	Peak	H	60.26	0.00	42.26	68.20	-25.94

**Table 6-23. Radiated Measurements @ 1 meter**

**NOTES:**

- All harmonics that do not lie in a restricted band are subject to a peak limit of -27dBm/MHz.
- All emissions that lie in the restricted bands (denoted by a \* next to the frequency) specified in §15.205 are below the limit shown in Table 6-14.
- Average measurements > 1GHz using RBW = 1MHz and VBW = 10Hz. Peak measurements > 1GHz using RBW = VBW = 1MHz.
- The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
- The EUT is supplied with nominal AC voltage and/or a new/fully-recharged battery.
- The spectrum is measured from 9kHz to 40GHz and the worst-case emissions are reported. No significant emissions were found beyond the fifth harmonic for this device.
- Levels at - 135 dBm represent the analyzer noise floor and signify that no emission was detected.
- Above 960MHz the limit is 500 μV/m (54dBμ/m) at 3 meters radiated for emissions that lie in restricted bands specified in §15.205.

FCC ID: A3LSWDSC04D		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1110181834.A3L	Test Dates: October 26 - 28, 2011	EUT Type: Portable Handset	Page 56 of 73	

## 6.10 Radiated Band Edge Measurements

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

Mode: 802.11a

Transfer Rate: 6 Mbps

Distance of Measurements: 1 Meter

Operating Frequency: 5180MHz



Channel: 36

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB]	Distance Correction Factor [dB]	Field Strength [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]
4507.15	-106.99	Average	H	41.45	-9.54	31.92	53.98	-22.06
4507.15	-95.20	Peak	H	41.45	-9.54	43.71	73.98	-30.27
4579.30	-106.60	Average	H	41.55	-9.54	32.41	53.98	-21.57
4579.30	-95.49	Peak	H	41.55	-9.54	43.52	73.98	-30.46
4614.40	-106.52	Average	H	41.61	-9.54	32.55	53.98	-21.43
4614.40	-94.92	Peak	H	41.61	-9.54	44.15	73.98	-29.83

**Table 6-24. Radiated Restricted Band Measurements at 1-meter (4.5 – 5.15GHz)**

### NOTES:

1. Average measurements > 1GHz using RBW = 1MHz and VBW = 10Hz. Peak measurements > 1GHz using RBW = VBW = 1MHz.
2. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
3. The EUT is supplied with nominal AC voltage and/or a new/fully-recharged battery.
4. The spectrum is measured from 9kHz to 40GHz and the worst-case emissions are reported. No significant emissions were found beyond the fifth harmonic for this device.
5. Levels at - 135 dBm represent the analyzer noise floor and signify that no emission was detected.
6. Above 960MHz the limit is 500  $\mu$ V/m (54dB $\mu$ /m) at 3 meters radiated for emissions that lie in restricted bands specified in §15.205.

FCC ID: A3LSWDSC04D		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1110181834.A3L	Test Dates: October 26 - 28, 2011	EUT Type: Portable Handset	Page 57 of 73	

**Radiated Band Edge Measurements (Cont'd)**  
**§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]**



Mode: 802.11a  
 Transfer Rate: 6 Mbps  
 Distance of Measurements: 1 Meter  
 Operating Frequency: 5320MHz  
 Channel: 64

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
5350.55	-107.77	Average	H	44.46	-9.54	34.15	53.98	-19.83
5350.55	-96.34	Peak	H	44.46	-9.54	45.58	73.98	-28.40
5353.41	-107.84	Average	H	44.46	-9.54	34.08	53.98	-19.89
5353.41	-95.51	Peak	H	44.46	-9.54	46.41	73.98	-27.56
5361.77	-107.90	Average	H	44.48	-9.54	34.03	53.98	-19.95
5361.77	-96.60	Peak	H	44.48	-9.54	45.33	73.98	-28.65

**Table 6-25. Radiated Restricted Band Measurements at 1-meter (5.35 – 5.46GHz, 5.46 – 5.47GHz)**

**NOTES:**

1. Emissions within 5.35 – 5.46GHz lie in a restricted band and are subject to the radiated emissions limits specified in §15.209. Emission within 5.46 – 5.47GHz are at the lower band edge of UNII Band 3 transmission and are subject to the -27dBm/MHz EIRP limit specified in §15.407.
2. Average measurements > 1GHz using RBW = 1MHz and VBW = 10Hz. Peak measurements > 1GHz using RBW = VBW = 1MHz.
3. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
4. The EUT is supplied with nominal AC voltage and/or a new/fully-recharged battery.
5. The spectrum is measured from 9kHz to 40GHz and the worst-case emissions are reported. No significant emissions were found beyond the fifth harmonic for this device.
6. Levels at - 135 dBm represent the analyzer noise floor and signify that no emission was detected.
7. Above 960MHz the limit is 500 μV/m (54dBμ/m) at 3 meters radiated for emissions that lie in restricteds band specified in §15.205.

FCC ID: A3LSWDSC04D		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1110181834.A3L	Test Dates: October 26 - 28, 2011	EUT Type: Portable Handset	Page 58 of 73	

**Radiated Band Edge Measurements (Cont'd)**  
**§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]**

Mode: 802.11a

Transfer Rate: 6 Mbps

Distance of Measurements: 1 Meter

Operating Frequency: 5500MHz



Channel: 100

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
5350.55	-107.93	Average	H	44.62	-9.54	34.15	53.98	-19.83
5350.55	-96.59	Peak	H	44.62	-9.54	45.49	73.98	-28.49
5429.42	-107.73	Average	H	44.77	-9.54	34.50	53.98	-19.48
5429.42	-96.63	Peak	H	44.77	-9.54	45.60	73.98	-28.38
5469.79	-93.89	Peak	H	44.83	-9.54	48.40	68.20	-19.80

**Table 6-26. Radiated Restricted Band Measurements at 1-meter (5.35 – 5.46GHz, 5.46 – 5.47GHz)**

**NOTES:**

1. Emissions within 5.35 – 5.46GHz lie in a restricted band and are subject to the radiated emissions limits specified in §15.209. Emission within 5.46 – 5.47GHz are at the lower band edge of UNII Band 3 transmission and are subject to the -27dBm/MHz EIRP limit specified in §15.407.
2. Average measurements > 1GHz using RBW = 1MHz and VBW = 10Hz. Peak measurements > 1GHz using RBW = VBW = 1MHz.
3. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
4. The EUT is supplied with nominal AC voltage and/or a new/fully-recharged battery.
5. The spectrum is measured from 9kHz to 40GHz and the worst-case emissions are reported. No significant emissions were found beyond the fifth harmonic for this device.
6. Levels at - 135 dBm represent the analyzer noise floor and signify that no emission was detected.
7. Above 960MHz the limit is 500 μV/m (54dBμ/m) at 3 meters radiated for emissions that lie in restricted bands specified in §15.205.

FCC ID: A3LSWDSC04D		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1110181834.A3L	Test Dates: October 26 - 28, 2011	EUT Type: Portable Handset	Page 59 of 73	

**Radiated Band Edge Measurements (Cont'd)**  
§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]



Mode: 802.11a  
 Transfer Rate: 6 Mbps  
 Distance of Measurements: 1 Meter  
 Operating Frequency: 5700MHz  
 Channel: 140

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
5764.05	-92.45	Peak	H	44.70	-9.54	49.71	68.20	-18.49
5793.75	-95.51	Peak	H	44.76	-9.54	46.71	68.20	-21.49
5900.17	-94.37	Peak	H	45.10	-9.54	48.19	68.20	-20.01

**Table 6-27. Radiated Restricted Band Measurements at 1-meter**

**NOTES:**

1. Average measurements > 1GHz using RBW = 1MHz and VBW = 10Hz. Peak measurements > 1GHz using RBW = VBW = 1MHz.
2. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
3. The EUT is supplied with nominal AC voltage and/or a new/fully-recharged battery.
4. The spectrum is measured from 9kHz to 40GHz and the worst-case emissions are reported. No significant emissions were found beyond the fifth harmonic for this device.
5. Levels at - 135 dBm represent the analyzer noise floor and signify that no emission was detected.
6. Above 960MHz the limit is 500 μV/m (54dBμ/m) at 3 meters radiated for emissions that lie in restricted bands specified in §15.205.


FCC ID: A3LSWDSC04D		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1110181834.A3L	Test Dates: October 26 - 28, 2011	EUT Type: Portable Handset	Page 60 of 73	

**6.11 Line-Conducted Test Data**  
**§15.207; RSS-Gen [7.2.2]**

# PCTEST Engineering Laboratory Inc.

Company : Samsung Electronics, Co. Ltd.  
 Model Number : SC-04D  
 FCC ID Code : A3LSWDSC04D  
 Standard : FCC Part 15C, 15.207

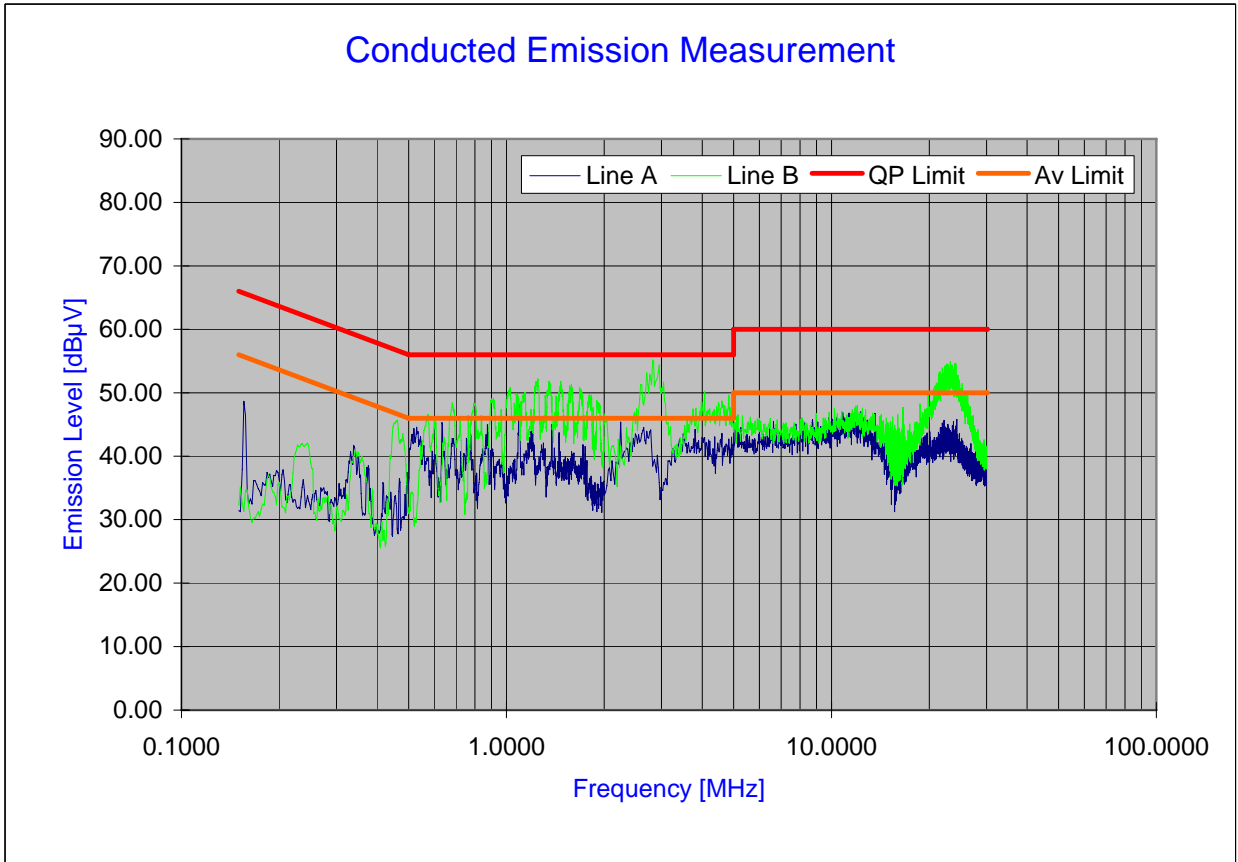Power Source : AC120V/60Hz  
 Tested Date : 10/27/2011  
 Note : Tested with 802.11a  
 UNII Band 1 ON





Ver.1.1 ©PCTEST 2006.08

**Plot 6-55. Line Conducted Plot with 802.11a (UNII Band 1)**

**Notes:**

1. All Modes of operation were investigated and the worst-case emissions are reported using 6Mbps.
2. The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
3. Line A = Phase; Line B = Neutral
4. Traces shown in plot made using a peak detector.
5. Deviations to the Specifications: None.

<b>FCC ID:</b> A3LSWDSC04D		<b>FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1110181834.A3L	<b>Test Dates:</b> October 26 - 28, 2011	<b>EUT Type:</b> Portable Handset	Page 61 of 73	



**Line-Conducted Test Data (Cont'd)**  
**§15.207; RSS-Gen [7.2.2]**

No.	Line	Frequency [MHz]	Factor [dB]	QP [dBμV]	Limit [dBμV]	Margin [dB]	Average [dBμV]	Limit [dBμV]	Margin [dB]
1	A	0.518	6.97	38.85	56.00	-17.15	29.55	46.00	-16.45
2	A	0.523	6.97	39.05	56.00	-16.95	29.20	46.00	-16.80
3	A	0.537	6.97	37.27	56.00	-18.73	28.72	46.00	-17.28
4	A	0.640	6.99	36.89	56.00	-19.11	25.91	46.00	-20.09
5	A	1.092	7.05	43.65	56.00	-12.35	33.46	46.00	-12.54
6	A	1.289	7.08	36.37	56.00	-19.63	25.28	46.00	-20.72
7	A	2.627	7.23	38.83	56.00	-17.17	29.50	46.00	-16.50
8	A	2.679	7.23	38.74	56.00	-17.26	29.43	46.00	-16.57
9	A	3.641	7.32	37.32	56.00	-18.68	28.02	46.00	-17.98
10	A	5.012	7.41	36.97	60.00	-23.03	27.01	50.00	-22.99
11	B	0.518	6.97	42.68	56.00	-13.32	31.86	46.00	-14.14
12	B	0.546	6.98	38.14	56.00	-17.86	25.56	46.00	-20.44
13	B	0.847	7.02	40.80	56.00	-15.20	29.71	46.00	-16.29
14	B	0.849	7.02	41.08	56.00	-14.92	29.91	46.00	-16.09
15	B	1.092	7.05	43.78	56.00	-12.22	35.22	46.00	-10.78
16	B	1.169	7.06	40.42	56.00	-15.58	30.17	46.00	-15.83
17	B	1.684	7.12	37.93	56.00	-18.07	26.77	46.00	-19.23
18	B	2.567	7.23	41.76	56.00	-14.24	32.06	46.00	-13.94
19	B	3.815	7.34	40.44	56.00	-15.56	29.79	46.00	-16.21
20	B	3.837	7.35	40.68	56.00	-15.32	29.99	46.00	-16.01

**Table 6-28. Line Conducted Data with 802.11a (UNII Band 1)**

**Notes:**

1. All Modes of operation were investigated and the worst-case emissions are reported using 6Mbps.
2. The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
3. Line A = Phase; Line B = Neutral
4. Traces shown in plot made using a peak detector.
5. Deviations to the Specifications: None.


FCC ID: A3LSWDSC04D		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1110181834.A3L	Test Dates: October 26 - 28, 2011	EUT Type: Portable Handset	Page 62 of 73	

**Line-Conducted Test Data (Cont'd)**  
**§15.207; RSS-Gen [7.2.2]**

# PCTEST Engineering Laboratory Inc.

Company : Samsung Electronics, Co. Ltd.  
 Model Number : SC-04D  
 FCC ID Code : A3LSWDSC04D  
 Standard : FCC Part 15C, 15.207

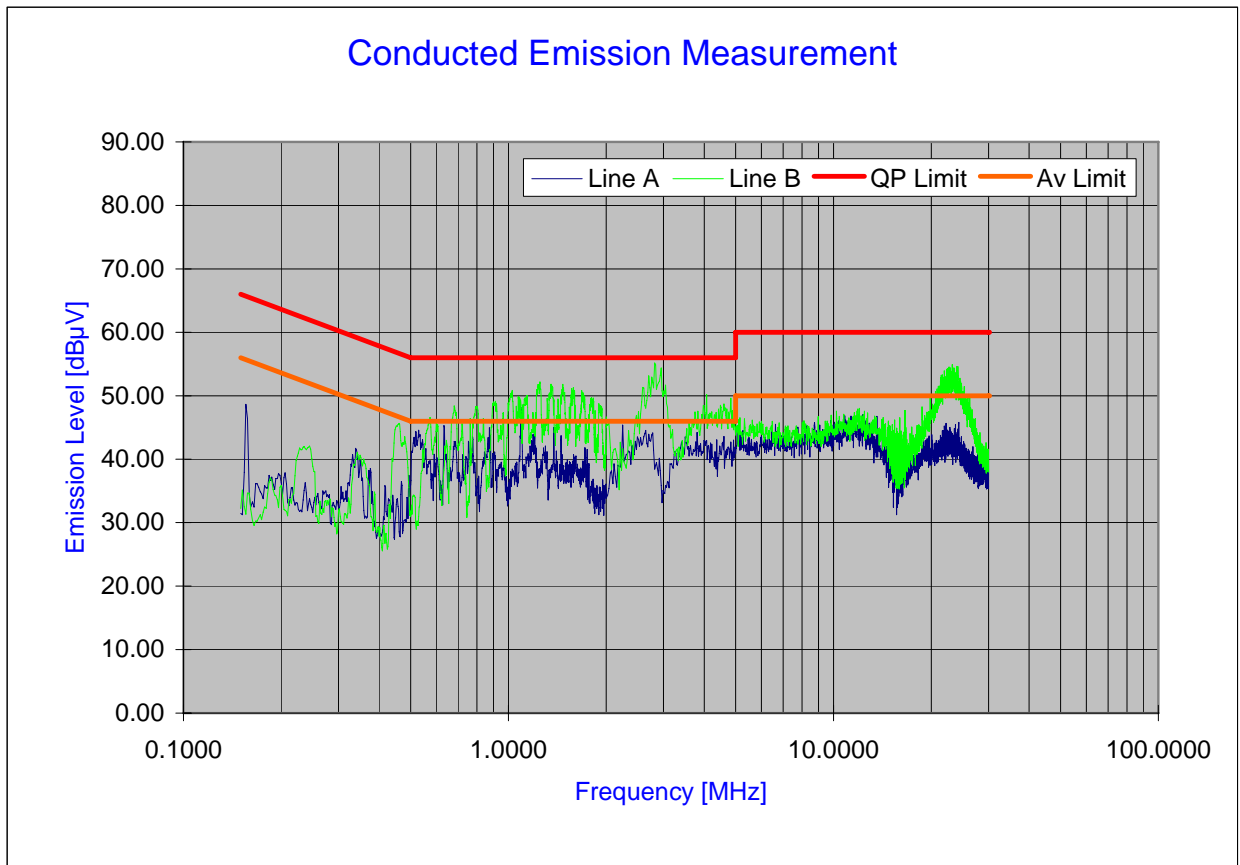Power Source : AC120V/60Hz  
 Tested Date : 10/27/2011  
 Note : Tested with 802.11a  
 UNII Band 2 ON





Ver.1.1 ©PCTEST 2006.08

**Plot 6-56. Line Conducted Plot with 802.11a (UNII Band 2)**

**Notes:**

1. All Modes of operation were investigated and the worst-case emissions are reported using 6Mbps.
2. The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
3. Line A = Phase; Line B = Neutral
4. Traces shown in plot made using a peak detector.
5. Deviations to the Specifications: None.

<b>FCC ID:</b> A3LSWDSC04D		<b>FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1110181834.A3L	<b>Test Dates:</b> October 26 - 28, 2011	<b>EUT Type:</b> Portable Handset	Page 63 of 73	



**Line-Conducted Test Data (Cont'd)**  
**§15.207; RSS-Gen [7.2.2]**

No.	Line	Frequency [MHz]	Factor [dB]	QP [dBµV]	Limit [dBµV]	Margin [dB]	Average [dBµV]	Limit [dBµV]	Margin [dB]
1	A	0.521	6.97	39.14	56.00	-16.86	28.99	46.00	-17.01
2	A	0.523	6.97	38.99	56.00	-17.01	29.55	46.00	-16.45
3	A	0.640	6.99	35.71	56.00	-20.29	25.43	46.00	-20.57
4	A	0.862	7.02	37.77	56.00	-18.23	26.90	46.00	-19.10
5	A	1.092	7.05	44.08	56.00	-11.92	33.63	46.00	-12.37
6	A	1.187	7.07	36.62	56.00	-19.38	26.96	46.00	-19.04
7	A	1.379	7.09	34.49	56.00	-21.51	25.74	46.00	-20.26
8	A	2.325	7.19	35.29	56.00	-20.71	25.91	46.00	-20.09
9	A	2.651	7.23	38.80	56.00	-17.20	29.21	46.00	-16.79
10	A	3.861	7.34	36.60	56.00	-19.40	27.42	46.00	-18.58
11	B	1.020	7.04	47.10	56.00	-8.90	30.54	46.00	-15.46
12	B	1.242	7.07	47.60	56.00	-8.40	31.20	46.00	-14.80
13	B	1.344	7.09	46.52	56.00	-9.48	30.81	46.00	-15.19
14	B	1.461	7.10	46.12	56.00	-9.88	30.47	46.00	-15.53
15	B	1.576	7.11	46.17	56.00	-9.83	30.47	46.00	-15.53
16	B	2.599	7.23	46.56	56.00	-9.44	36.07	46.00	-9.93
17	B	2.697	7.24	48.29	56.00	-7.71	37.43	46.00	-8.57
18	B	2.813	7.25	48.93	56.00	-7.07	37.45	46.00	-8.55
19	B	2.912	7.26	47.57	56.00	-8.43	36.11	46.00	-9.89
20	B	23.136	8.98	47.21	60.00	-12.79	38.59	50.00	-11.41

**Table 6-29. Line Conducted Data with 802.11a (UNII Band 2)**

**Notes:**

1. All Modes of operation were investigated and the worst-case emissions are reported using 6Mbps.
2. The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
3. Line A = Phase; Line B = Neutral
4. Traces shown in plot made using a peak detector.
5. Deviations to the Specifications: None.

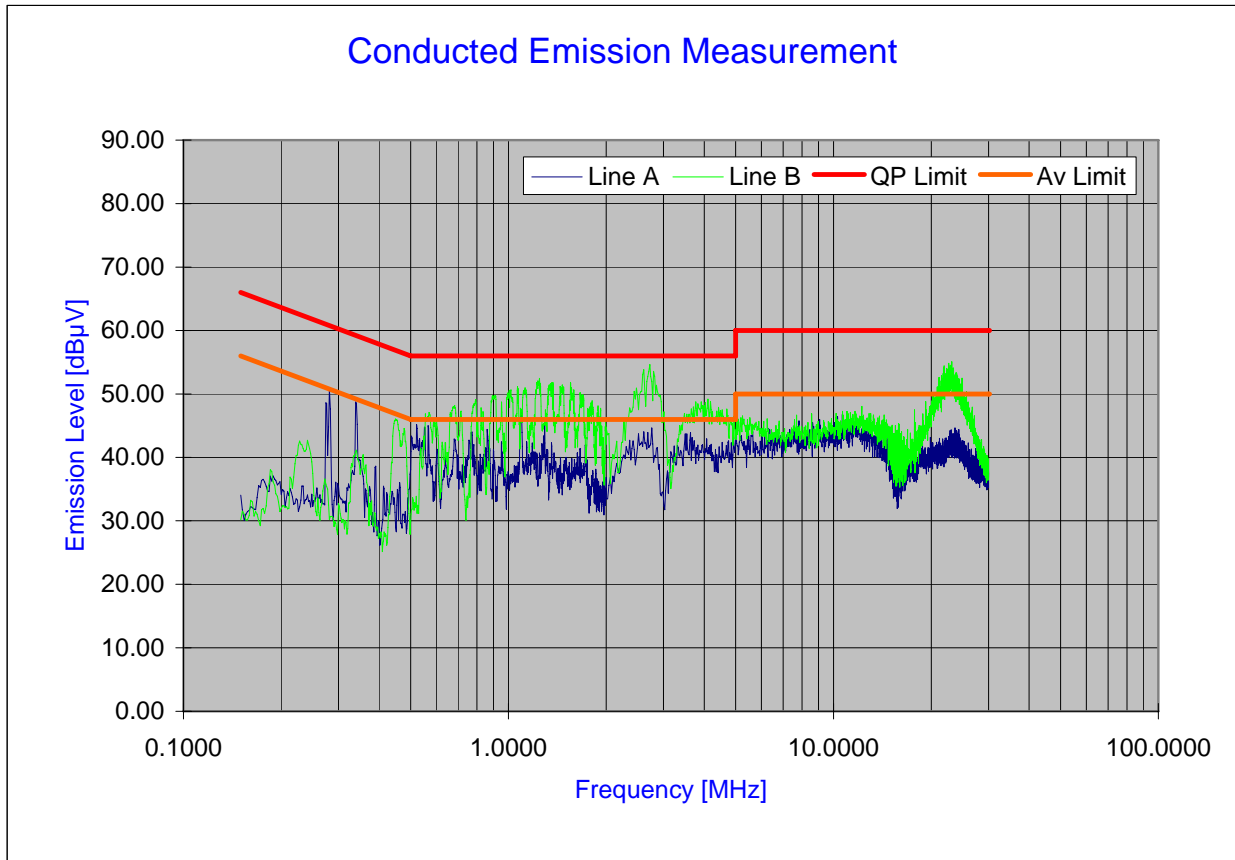
<b>FCC ID:</b> A3LSWDSC04D		<b>FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1110181834.A3L	<b>Test Dates:</b> October 26 - 28, 2011	<b>EUT Type:</b> Portable Handset	Page 64 of 73	

**Line-Conducted Test Data (Cont'd)**  
**§15.207; RSS-Gen [7.2.2]**

# PCTEST Engineering Laboratory Inc.

Company : Samsung Electronics, Co. Ltd.  
 Model Number : SC-04D  
 FCC ID Code : A3LSWDSC04D  
 Standard : FCC Part 15C, 15.207

Power Source : AC120V/60Hz  
 Tested Date : 10/27/2011  
 Note : Tested with 802.11a  
 UNII Band 3 ON





Ver.1.1 ©PCTEST 2006.08

**Plot 6-57. Line Conducted Plot with 802.11a (UNII Band 3)**

**Notes:**

1. All Modes of operation were investigated and the worst-case emissions are reported using 6Mbps.
2. The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
3. Line A = Phase; Line B = Neutral
4. Traces shown in plot made using a peak detector.
5. Deviations to the Specifications: None.

<b>FCC ID:</b> A3LSWDSC04D		<b>FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1110181834.A3L	<b>Test Dates:</b> October 26 - 28, 2011	<b>EUT Type:</b> Portable Handset	Page 65 of 73	

## Line-Conducted Test Data (Cont'd)



§15.207; RSS-Gen [7.2.2]

No.	Line	Frequency [MHz]	Factor [dB]	QP [dBμV]	Limit [dBμV]	Margin [dB]	Average [dBμV]	Limit [dBμV]	Margin [dB]
1	A	0.276	6.90	31.05	60.93	-29.88	23.05	50.93	-27.88
2	A	0.338	6.93	35.68	59.25	-23.57	25.87	49.25	-23.38
3	A	0.523	6.97	38.71	56.00	-17.29	27.45	46.00	-18.55
4	A	0.536	6.97	37.97	56.00	-18.03	26.66	46.00	-19.34
5	A	0.570	6.98	35.26	56.00	-20.74	28.47	46.00	-17.53
6	A	0.767	7.01	36.37	56.00	-19.63	26.26	46.00	-19.74
7	A	0.864	7.02	37.58	56.00	-18.42	26.00	46.00	-20.00
8	A	1.092	7.05	43.55	56.00	-12.45	33.48	46.00	-12.52
9	A	1.287	7.08	36.25	56.00	-19.75	25.34	46.00	-20.66
10	A	2.663	7.23	37.83	56.00	-18.17	28.33	46.00	-17.67
11	B	1.067	7.05	43.81	56.00	-12.19	30.26	46.00	-15.74
12	B	1.232	7.07	47.77	56.00	-8.23	31.69	46.00	-14.31
13	B	1.234	7.07	47.58	56.00	-8.42	30.80	46.00	-15.20
14	B	1.351	7.09	46.88	56.00	-9.12	29.43	46.00	-16.57
15	B	1.354	7.09	46.89	56.00	-9.11	29.29	46.00	-16.71
16	B	1.450	7.10	46.33	56.00	-9.67	30.10	46.00	-15.90
17	B	1.561	7.11	45.94	56.00	-10.06	30.30	46.00	-15.70
18	B	2.694	7.24	48.27	56.00	-7.73	35.86	46.00	-10.14
19	B	2.697	7.24	48.22	56.00	-7.78	36.81	46.00	-9.19
20	B	2.791	7.25	47.71	56.00	-8.29	36.40	46.00	-9.60

Table 6-30. Line Conducted Data with 802.11a (UNII Band 3)

**Notes:**

1. All Modes of operation were investigated and the worst-case emissions are reported using 6Mbps.
2. The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
3. Line A = Phase; Line B = Neutral
4. Traces shown in plot made using a peak detector.
5. Deviations to the Specifications: None.


FCC ID: A3LSWDSC04D		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1110181834.A3L	Test Dates: October 26 - 28, 2011	EUT Type: Portable Handset	Page 66 of 73	

**Line-Conducted Test Data (Cont'd)**  
**§15.207; RSS-Gen [7.2.2]**

# PCTEST Engineering Laboratory Inc.

Company : Samsung Electronics, Co. Ltd.  
 Model Number : SC-04D  
 FCC ID Code : A3LSWDSC04D  
 Standard : FCC Part 15C, 15.207

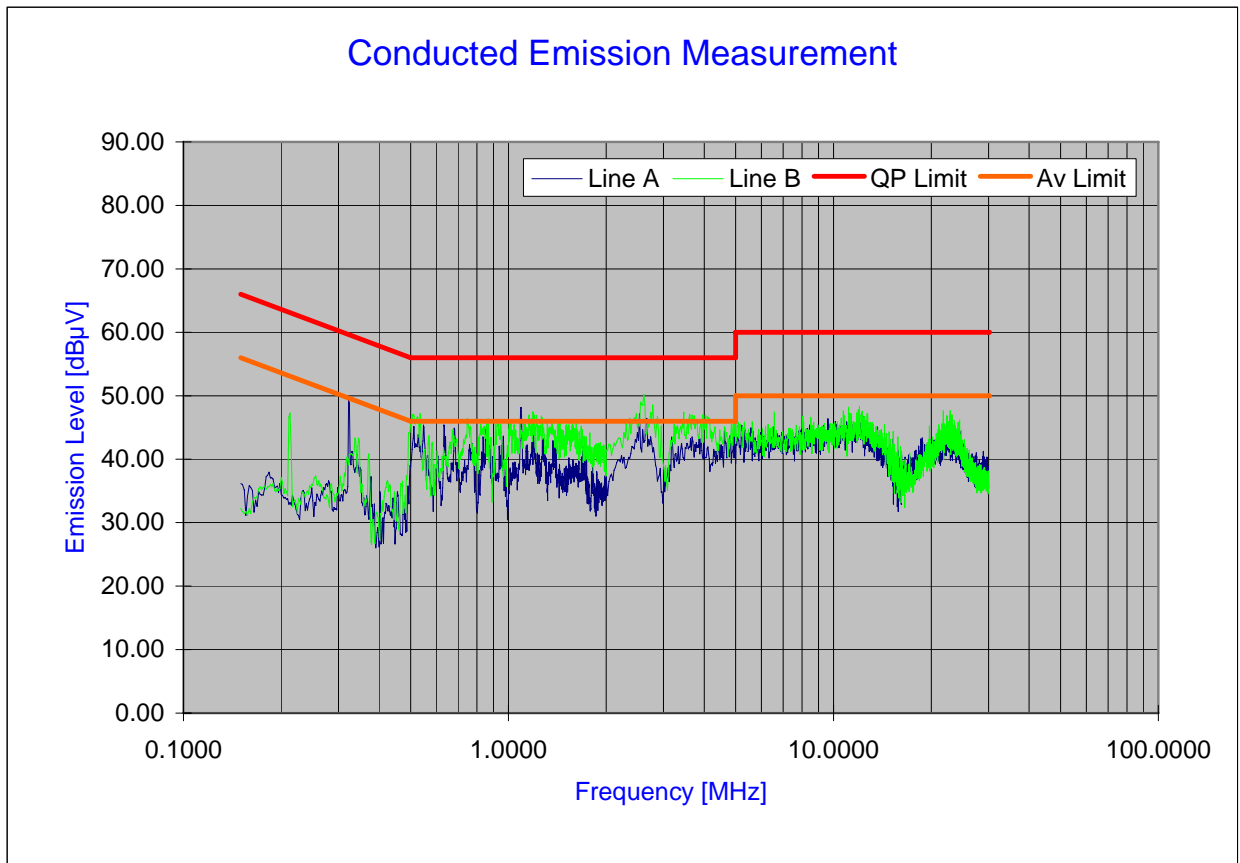Power Source : AC120V/60Hz  
 Tested Date : 10/27/2011  
 Note : Tested with 802.11n  
 UNII Band 1 ON





Ver.1.1 ©PCTEST 2006.08

**Plot 6-58. Line Conducted Plot with 802.11n (UNII Band 1)**

**Notes:**

1. All Modes of operation were investigated and the worst-case emissions are reported using 6.5Mbps.
2. The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
3. Line A = Phase; Line B = Neutral
4. Traces shown in plot made using a peak detector.
5. Deviations to the Specifications: None.

<b>FCC ID:</b> A3LSWDSC04D		<b>FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1110181834.A3L	<b>Test Dates:</b> October 26 - 28, 2011	<b>EUT Type:</b> Portable Handset	Page 67 of 73	



**Line-Conducted Test Data (Cont'd)**  
**§15.207; RSS-Gen [7.2.2]**

No.	Line	Frequency [MHz]	Factor [dB]	QP [dBμV]	Limit [dBμV]	Margin [dB]	Average [dBμV]	Limit [dBμV]	Margin [dB]
1	A	0.336	6.93	35.21	59.30	-24.09	23.53	49.30	-25.77
2	A	0.518	6.97	39.08	56.00	-16.92	29.63	46.00	-16.37
3	A	0.536	6.97	37.53	56.00	-18.47	24.65	46.00	-21.35
4	A	0.633	6.99	36.28	56.00	-19.72	23.69	46.00	-22.31
5	A	0.682	7.00	40.39	56.00	-15.61	30.44	46.00	-15.56
6	A	0.861	7.02	37.69	56.00	-18.31	26.86	46.00	-19.14
7	A	1.092	7.05	44.22	56.00	-11.78	33.55	46.00	-12.45
8	A	2.590	7.22	38.48	56.00	-17.52	29.37	46.00	-16.63
9	A	2.606	7.23	38.36	56.00	-17.64	29.05	46.00	-16.95
10	A	4.641	7.39	36.18	56.00	-19.82	26.41	46.00	-19.59
11	B	0.513	6.97	43.30	56.00	-12.70	32.49	46.00	-13.51
12	B	0.519	6.97	42.10	56.00	-13.90	29.66	46.00	-16.34
13	B	1.171	7.07	40.80	56.00	-15.20	28.90	46.00	-17.10
14	B	1.181	7.07	40.51	56.00	-15.49	30.01	46.00	-15.99
15	B	1.183	7.07	40.35	56.00	-15.65	29.95	46.00	-16.05
16	B	1.239	7.07	39.14	56.00	-16.86	26.97	46.00	-19.03
17	B	2.587	7.23	41.90	56.00	-14.10	32.29	46.00	-13.71
18	B	3.491	7.32	40.38	56.00	-15.62	30.48	46.00	-15.52
19	B	3.652	7.33	40.90	56.00	-15.10	30.38	46.00	-15.62
20	B	3.884	7.35	40.13	56.00	-15.87	29.90	46.00	-16.10

**Table 6-31. Line Conducted Data with 802.11n (UNII Band 1)**

**Notes:**

1. All Modes of operation were investigated and the worst-case emissions are reported using 6.5Mbps.
2. The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
3. Line A = Phase; Line B = Neutral
4. Traces shown in plot made using a peak detector.
5. Deviations to the Specifications: None.

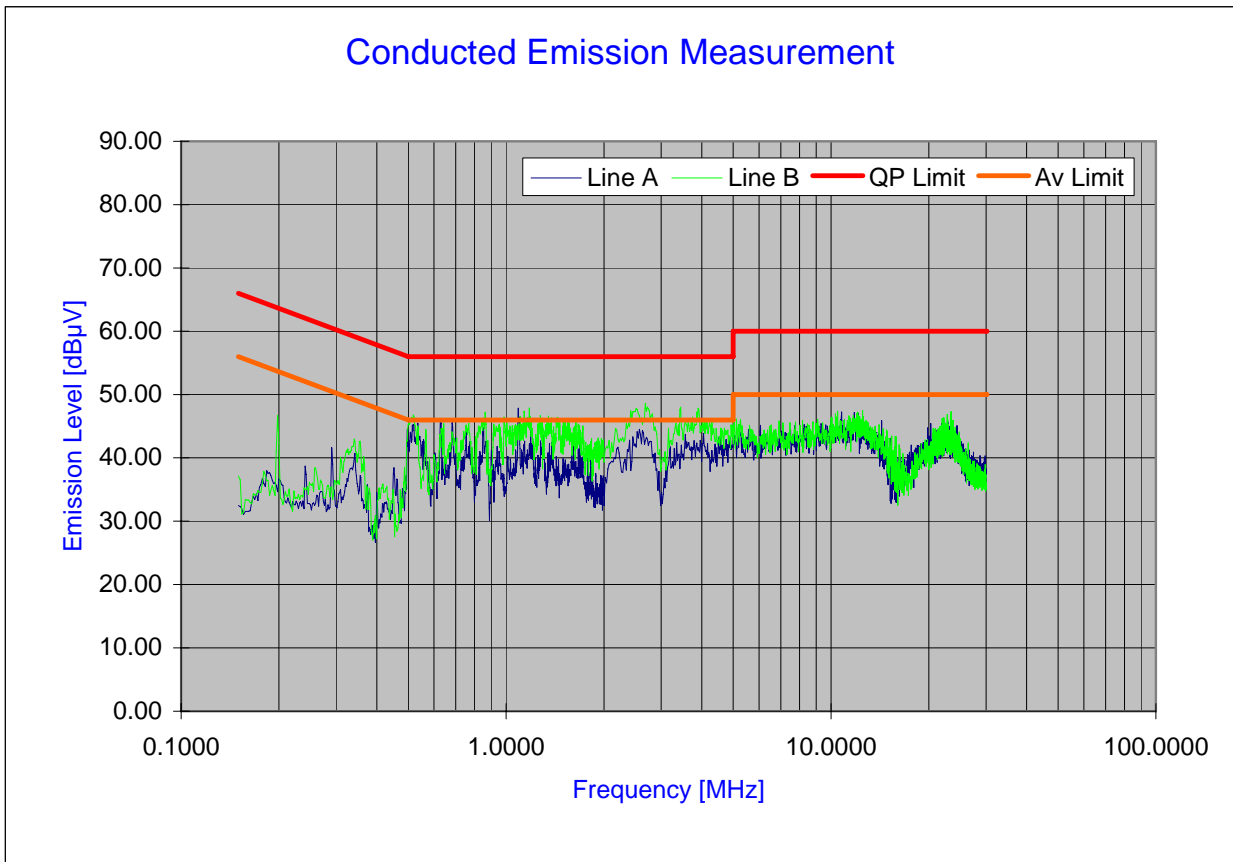
<b>FCC ID:</b> A3LSWDSC04D		<b>FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1110181834.A3L	<b>Test Dates:</b> October 26 - 28, 2011	<b>EUT Type:</b> Portable Handset	Page 68 of 73	

**Line-Conducted Test Data (Cont'd)**  
**§15.207; RSS-Gen [7.2.2]**

# PCTEST Engineering Laboratory Inc.

Company : Samsung Electronics, Co. Ltd.  
 Model Number : SC-04D  
 FCC ID Code : A3LSWDSC04D  
 Standard : FCC Part 15C, 15.207

Power Source : AC120V/60Hz  
 Tested Date : 10/27/2011  
 Note : Tested with 802.11n  
 UNII Band 2 ON





Ver.1.1 ©PCTEST 2006.08

**Plot 6-59. Line Conducted Plot with 802.11n (UNII Band 2)**

**Notes:**

1. All Modes of operation were investigated and the worst-case emissions are reported using 6.5Mbps.
2. The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
3. Line A = Phase; Line B = Neutral
4. Traces shown in plot made using a peak detector.
5. Deviations to the Specifications: None.

<b>FCC ID:</b> A3LSWDSC04D		<b>FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1110181834.A3L	<b>Test Dates:</b> October 26 - 28, 2011	<b>EUT Type:</b> Portable Handset	Page 69 of 73	



**Line-Conducted Test Data (Cont'd)**  
**§15.207; RSS-Gen [7.2.2]**

No.	Line	Frequency [MHz]	Factor [dB]	QP [dBμV]	Limit [dBμV]	Margin [dB]	Average [dBμV]	Limit [dBμV]	Margin [dB]
1	A	0.516	6.97	38.84	56.00	-17.16	27.33	46.00	-18.67
2	A	0.521	6.97	38.97	56.00	-17.03	27.79	46.00	-18.21
3	A	0.538	6.97	37.86	56.00	-18.14	27.23	46.00	-18.77
4	A	0.630	6.99	35.64	56.00	-20.36	23.44	46.00	-22.56
5	A	0.683	7.00	39.76	56.00	-16.24	30.85	46.00	-15.15
6	A	0.753	7.01	36.27	56.00	-19.73	26.75	46.00	-19.25
7	A	0.862	7.02	37.13	56.00	-18.87	26.93	46.00	-19.07
8	A	1.092	7.05	43.27	56.00	-12.73	33.65	46.00	-12.35
9	A	1.186	7.07	36.37	56.00	-19.63	26.57	46.00	-19.43
10	A	2.614	7.23	38.61	56.00	-17.39	29.35	46.00	-16.65
11	B	0.511	6.97	43.14	56.00	-12.86	30.81	46.00	-15.19
12	B	0.844	7.02	41.00	56.00	-15.00	28.87	46.00	-17.13
13	B	1.155	7.06	39.91	56.00	-16.09	28.68	46.00	-17.32
14	B	1.174	7.07	40.77	56.00	-15.23	30.38	46.00	-15.62
15	B	1.185	7.07	40.47	56.00	-15.53	30.40	46.00	-15.60
16	B	1.267	7.08	40.53	56.00	-15.47	29.45	46.00	-16.55
17	B	1.360	7.09	39.75	56.00	-16.25	26.97	46.00	-19.03
18	B	2.620	7.23	42.08	56.00	-13.92	32.30	46.00	-13.70
19	B	3.401	7.31	40.55	56.00	-15.45	30.00	46.00	-16.00
20	B	3.809	7.34	40.66	56.00	-15.34	30.27	46.00	-15.73

**Table 6-32. Line Conducted Data with 802.11n (UNII Band 2)**

**Notes:**

1. All Modes of operation were investigated and the worst-case emissions are reported using 6.5Mbps.
2. The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
3. Line A = Phase; Line B = Neutral
4. Traces shown in plot made using a peak detector.
5. Deviations to the Specifications: None.


FCC ID: A3LSWDSC04D		FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1110181834.A3L	Test Dates: October 26 - 28, 2011	EUT Type: Portable Handset	Page 70 of 73	

**Line-Conducted Test Data (Cont'd)**  
**§15.207; RSS-Gen [7.2.2]**

# PCTEST Engineering Laboratory Inc.

Company : Samsung Electronics, Co. Ltd.  
 Model Number : SC-04D  
 FCC ID Code : A3LSWDSC04D  
 Standard : FCC Part 15C, 15.207

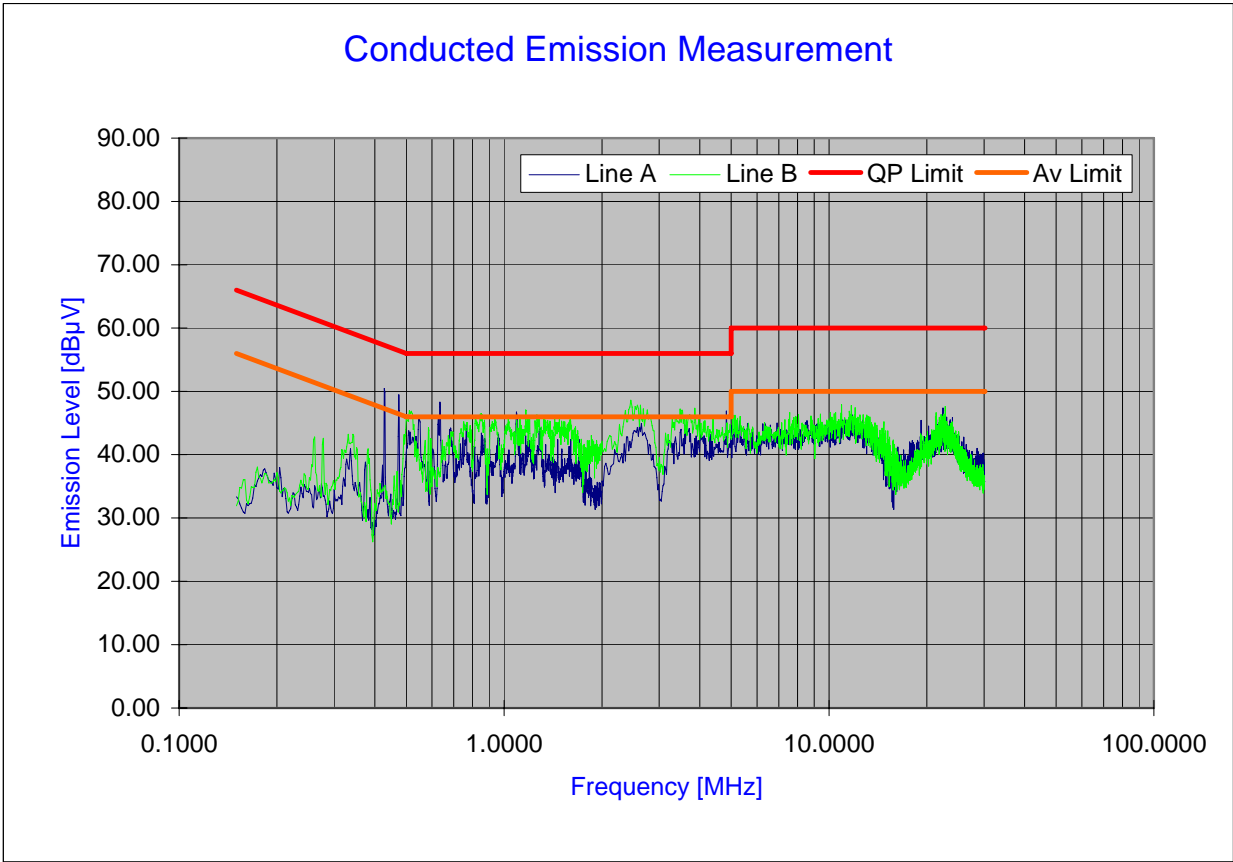Power Source : AC120V/60Hz  
 Tested Date : 10/27/2011  
 Note : Tested with 802.11n  
 UNII Band 3 ON





Ver.1.1 ©PCTEST 2006.08

**Plot 6-60. Line Conducted Plot with 802.11n (UNII Band 3)**

**Notes:**

1. All Modes of operation were investigated and the worst-case emissions are reported using 6.5Mbps.
2. The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
3. Line A = Phase; Line B = Neutral
4. Traces shown in plot made using a peak detector.
5. Deviations to the Specifications: None.

<b>FCC ID:</b> A3LSWDSC04D		<b>FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1110181834.A3L	<b>Test Dates:</b> October 26 - 28, 2011	<b>EUT Type:</b> Portable Handset	Page 71 of 73	



**Line-Conducted Test Data (Cont'd)**  
**§15.207; RSS-Gen [7.2.2]**

No.	Line	Frequency [MHz]	Factor [dB]	QP [dBμV]	Limit [dBμV]	Margin [dB]	Average [dBμV]	Limit [dBμV]	Margin [dB]
1	A	0.427	6.95	29.20	57.32	-28.12	20.84	47.32	-26.48
2	A	0.491	6.96	28.18	56.16	-27.98	19.97	46.16	-26.19
3	A	0.529	6.97	38.54	56.00	-17.46	27.46	46.00	-18.54
4	A	0.629	6.99	35.34	56.00	-20.66	25.46	46.00	-20.54
5	A	0.682	7.00	40.25	56.00	-15.75	30.44	46.00	-15.56
6	A	0.765	7.01	36.19	56.00	-19.81	26.70	46.00	-19.30
7	A	1.092	7.05	43.66	56.00	-12.34	33.80	46.00	-12.20
8	A	2.629	7.23	38.67	56.00	-17.33	29.28	46.00	-16.72
9	A	3.657	7.32	37.39	56.00	-18.61	28.21	46.00	-17.79
10	A	4.761	7.40	36.04	56.00	-19.96	26.70	46.00	-19.30
11	B	0.516	6.97	43.24	56.00	-12.76	32.11	46.00	-13.89
12	B	0.846	7.02	41.09	56.00	-14.91	29.78	46.00	-16.22
13	B	1.176	7.07	40.75	56.00	-15.25	29.46	46.00	-16.54
14	B	1.265	7.08	41.00	56.00	-15.00	28.88	46.00	-17.12
15	B	1.266	7.08	40.61	56.00	-15.39	29.53	46.00	-16.47
16	B	2.516	7.22	42.14	56.00	-13.86	31.19	46.00	-14.81
17	B	3.403	7.31	40.51	56.00	-15.49	29.17	46.00	-16.83
18	B	3.449	7.31	40.59	56.00	-15.41	30.55	46.00	-15.45
19	B	3.770	7.34	40.91	56.00	-15.09	30.13	46.00	-15.87
20	B	3.773	7.34	40.72	56.00	-15.28	30.04	46.00	-15.96

**Table 6-33. Line Conducted Data with 802.11n (UNII Band 3)**



**Notes:**

1. All Modes of operation were investigated and the worst-case emissions are reported using 6.5Mbps.
2. The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
3. Line A = Phase; Line B = Neutral
4. Traces shown in plot made using a peak detector.
5. Deviations to the Specifications: None.

<b>FCC ID:</b> A3LSWDSC04D		<b>FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1110181834.A3L	<b>Test Dates:</b> October 26 - 28, 2011	<b>EUT Type:</b> Portable Handset	Page 72 of 73	

## 7.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Samsung Portable Handset FCC ID: A3LSWDSC04D** is in compliance with Part 15E of the FCC Rules and RSS-210 of the Industry Canada Rules..

<b>FCC ID:</b> A3LSWDSC04D		<b>FCC Pt. 15.407 802.11a/n UNII MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1110181834.A3L	<b>Test Dates:</b> October 26 - 28, 2011	<b>EUT Type:</b> Portable Handset	Page 73 of 73	