



CERTIFICATION TEST REPORT

Report Number. : 4790173288-FR1V2

Applicant : Samsung Electronics Co.,Ltd.
129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do 16677,
Korea

Model : VG-STDB10

FCC : A3LVGSTDB10
IC : 649E-VGSTDB10

EUT Description : SmartThings Dongle

Test Standard(s) : FCC 47 CFR PART 15 SUBPART C
INDUSTRY CANADA RSS-247 Issue 2
INDUSTRY CANADA RSS-GEN Issue 5

Date Of Issue:
2021-12-09

Prepared by:
UL Korea, Ltd.
26th floor, 152, Teheran-ro, Gangnam-gu Seoul, 06236, Korea

Suwon Test Site: UL Korea, Ltd. Suwon Laboratory
218 Maeyeong-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16675, Korea
TEL: (031) 337-9902
FAX: (031) 213-5433



Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
V1	12/06/21	Initial issue	Robby Lee
V2	12/09/21	Updated the Page 11	Robby Lee

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	5
2. TEST METHODOLOGY	6
3. FACILITIES AND ACCREDITATION	6
4. DECISION RULES AND MEASUREMENT UNCERTAINTY	7
4.1. METROLOGICAL TRACEABILITY.....	7
4.2. SAMPLE CALCULATION.....	7
4.3. DECISION RULES.....	7
4.4. MEASUREMENT UNCERTAINTY	7
5. EQUIPMENT UNDER TEST	8
5.1. EUT DESCRIPTION.....	8
5.2. MAXIMUM OUTPUT POWER.....	8
5.3. DESCRIPTION OF AVAILABLE ANTENNAS	8
5.4. WORST-CASE CONFIGURATION AND MODE	8
5.5. DESCRIPTION OF TEST SETUP	9
6. MEASUREMENT METHOD.....	11
7. TEST AND MEASUREMENT EQUIPMENT	12
8. TEST RESULTS SUMMARY	13
9. ANTENNA PORT TEST RESULTS	14
9.1. ON TIME AND DUTY CYCLE	14
9.2. 6 dB & 99% BANDWIDTH.....	15
9.2.1. Zigbee	15
9.2.2. 6 dB & 99% BANDWIDTH PLOTS.....	16
9.3. OUTPUT POWER.....	17
9.3.1. Zigbee	17
9.3.2. PEAK POWER PLOTS	18
9.4. POWER SPECTRAL DENSITY	19
9.4.1. Zigbee	19
9.4.2. PSD TEST PLOTS	20
9.5. CONDUCTED SPURIOUS EMISSIONS	21
9.5.1. Zigbee	22
10. RADIATED TEST RESULTS	23
10.1. LIMITS AND PROCEDURE	23

10.2. TRANSMITTER ABOVE 1 GHz25
 10.2.1. Zigbee25
10.3. WORST CASE BELOW 1 GHZ.....35

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: Samsung Electronics Co.,Ltd.
EUT DESCRIPTION: SmartThings Dongle
MODEL: VG-STDB10
SERIAL NUMBER: Proto type
DATE TESTED: 2021-11-03 ~ 2021-11-12;

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Complies
INDUSTRY CANADA RSS-247 Issue 2	Complies
INDUSTRY CANADA RSS-GEN Issue 5	Complies

UL Korea, Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Korea, Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Korea, Ltd. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Korea, Ltd. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by IAS, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Korea, Ltd. By:

Tested By:



Anthony Kim
Suwon Lab Engineer
UL Korea, Ltd.

Robby Lee
Suwon Lab Engineer
UL Korea, Ltd.

2. TEST METHODOLOGY

1. FCC CFR 47 Part 2.
2. FCC CFR 47 Part 15.
3. KDB 558074 D01 15.247 Meas Guidance v05r02.
4. ANSI C63.10-2013.
5. IC RSS-GEN Issue 5.
6. IC RSS-247 Issue 2.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 218 Maeyeong-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16675, Korea. Line conducted emissions are measured only at the 218 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

218 Maeyeong-ro	
<input type="checkbox"/>	Chamber 1
<input checked="" type="checkbox"/>	Chamber 2
<input checked="" type="checkbox"/>	Chamber 3

Used ISED Test Site Reg.(company number): 2324L
CAB Identifier: KR0161

UL Korea, Ltd. is accredited by IAS, Laboratory Code TL-637. The full scope of accreditation can be viewed at <https://www.iasonline.org/wp-content/uploads/2017/05/TL-637-cert-New.pdf>.

4. DECISION RULES AND MEASUREMENT UNCERTAINTY

4.1. METROLOGICAL TRACEABILITY

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 28.9 \text{ dBuV/m} &= 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} \end{aligned}$$

4.3. DECISION RULES

Decision rule for statement(s) of conformity is based on Procedure 1, Clause 4.4.2 in IEC Guide 115:2007.

4.4. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.01 dB
Radiated Disturbance, 30 MHz to 1 GHz	4.26 dB
Radiated Disturbance, 1 GHz to 18 GHz	5.90 dB
Radiated Disturbance, 18 GHz to 40 GHz	5.49 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. EUT DESCRIPTION

The EUT is a SmartThings Dongle.
This test report addresses the DTS (Zigbee) operational mode.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

Frequency Range [MHz]	Mode	Power Mode	Output Power [dBm]	Output Power [mW]
2 405 ~ 2 470	Zigbee	Peak	18.34	68.24

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

**The internal antenna was Permanently attached.
Therefore this E.U.T Complies with the requirement of §15.203.**

The radio utilizes an internal antennas, with maximum gain of 1.74 dBi.

5.4. WORST-CASE CONFIGURATION AND MODE

Radiated emission below 1GHz and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

Radiated emission above 1GHz was performed with the EUT set to transmit low/mid/high channels.

The fundamental of the EUT was investigated in three orthogonal orientations X, Y and Z it was determined that Y orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in Y orientation.

5.5. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Notebook	LG	15UD490	MEZ66836767	N/A
Adaptor (for Notebook)	Chicony Power Technology (SuZhou) Co.,Ltd.	A12-065N2A	AG19034C140	N/A
Data Cable	N/A	N/A	N/A	N/A
Test Jig Board	SAMSUNG	N/A	N/A	N/A


I/O CABLE

I/O Cable List						
Cable No.	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC Power & Data	1	Flat	Unshielded	0.1 m	N/A
2	DC Power & Data	2	Micro USB	Shielded	1.0 m	N/A


TEST SETUP

The EUT is a unit with test jig board during the tests.
 It was controlled by entering the test mode using a Notebook.

SETUP DIAGRAM FOR TESTS (CONDUCTED TEST SETUP)

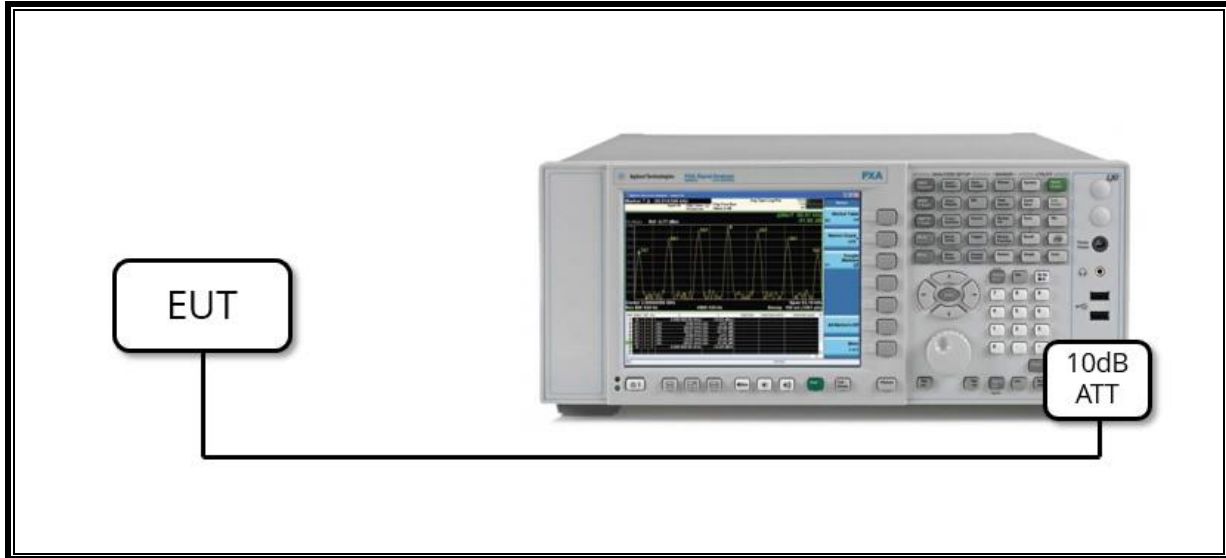

SETUP DIAGRAM FOR TESTS (RADIATED TEST SETUP)

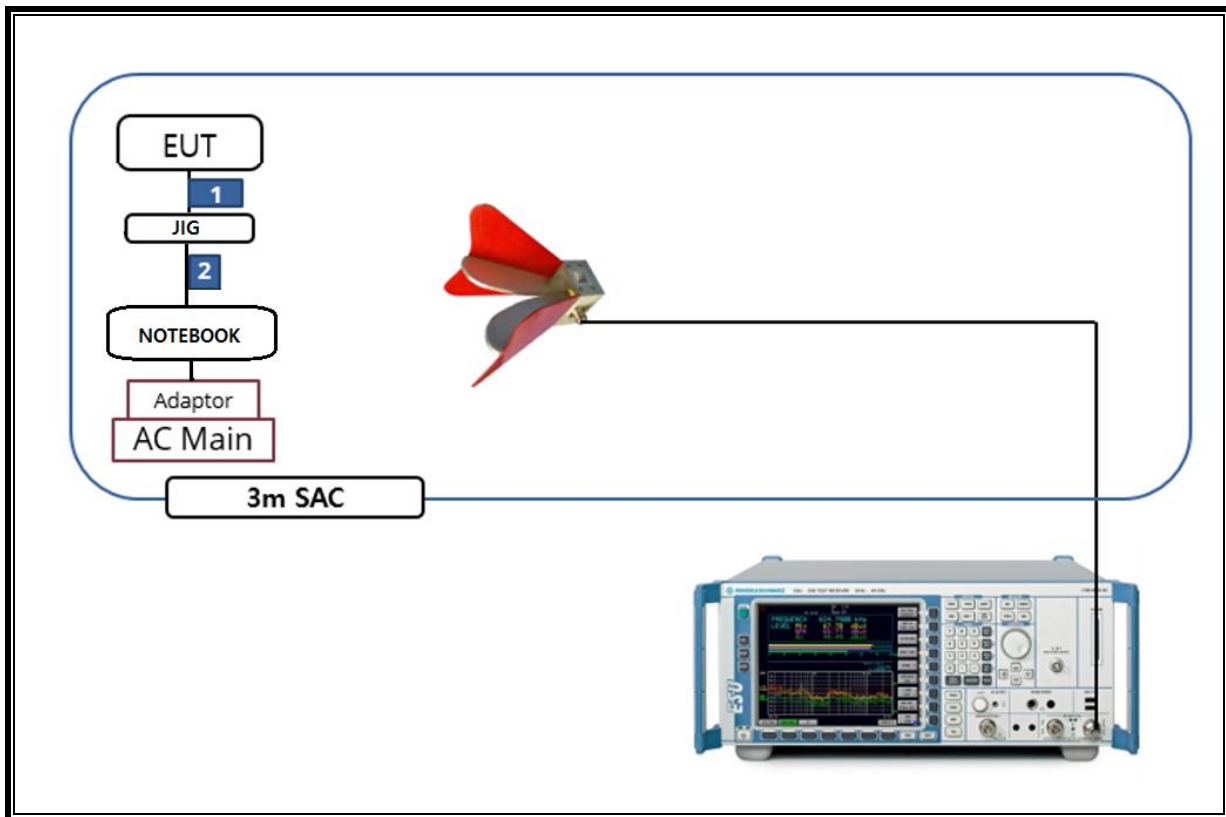

6. MEASUREMENT METHOD

6 dB BW : KDB 558074 D01 v05r02, Section 8.2.

OUTPUT POWER : KDB 558074 D01 v05r02, Section 8.3.1.1

POWER SPECTRAL DENSITY : ANSI C 63.10-2013, Section 11.10.2

Out-of-band Emissions (Conducted) : KDB 558074 D01 v05r02, Section 8.5.

Out-of-band Emissions in Non-restricted Bands: KDB 558074 D01 v05r02, Section 8.5.

Out-of-band Emissions in Restricted Bands : KDB 558074 D01 v05r02, Section 8.6.

AC Power Line Conducted Emission : ANSI C63.10-2013, Section 6.2

7. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	S/N	Cal Due
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	750	2022-08-19
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	749	2022-08-13
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	845	2022-08-13
Antenna, Horn, 18 GHz	ETS	3115	00167211	2022-07-27
Antenna, Horn, 18 GHz	ETS	3115	00161451	2022-08-15
Antenna, Horn, 18 GHz	ETS	3117	00168724	2022-07-27
Antenna, Horn, 18 GHz	ETS	3117	00168717	2022-08-15
Antenna, Horn, 40 GHz	ETS	3116C	00166155	2022-08-04
Antenna, Horn, 40 GHz	ETS	3116C	00168645	2021-10-02
Preamplifier	ETS	3116C-PA	00168841	2022-08-04
Preamplifier, 1000 MHz	Sonoma	310N	341282	2022-08-02
Preamplifier, 1000 MHz	Sonoma	310N	351741	2022-08-02
Preamplifier, 1000 MHz	Sonoma	310N	370599	2022-08-02
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	1876511	2022-08-02
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	1896138	2022-08-02
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	2029168	2022-08-02
Spectrum Analyzer, 44 GHz	Agilent / HP	N9030A	MY54170614	2022-08-04
Spectrum Analyzer, 44 GHz	Agilent / HP	N9030A	MY54490312	2022-08-04
Spectrum Analyzer, 44 GHz	KEYSIGHT	N9030B	MY60070693	2022-01-03
Average Power Sensor	Agilent / HP	U2000	MY54270007	2022-08-04
Average Power Sensor	Agilent / HP	U2000	MY54260010	2022-08-04
Attenuator	PASTERNAK	PE7087-10	A001	2022-08-03
Attenuator	PASTERNAK	PE7087-10	A008	2022-08-03
Attenuator	PASTERNAK	PE7004-10	2	2022-08-02
Attenuator	PASTERNAK	PE7087-10	A009	2022-08-03
EMI Test Receive, 40 GHz	R&S	ESU40	100439	2022-08-02
EMI Test Receive, 40 GHz	R&S	ESU40	100457	2022-08-02
EMI Test Receive, 3 GHz	R&S	ESR3	101832	2022-08-02
Low Pass Filter 5GHz	Micro-Tronics	LPS17541	009	2022-08-02
Low Pass Filter 5GHz	Micro-Tronics	LPS17541	015	2022-08-02
Low Pass Filter 5GHz	Micro-Tronics	LPS17541	019	2022-08-02
High Pass Filter 3GHz	Micro-Tronics	HPM17543	010	2022-08-02
High Pass Filter 3GHz	Micro-Tronics	HPM17543	015	2022-08-02
High Pass Filter 3GHz	Micro-Tronics	HPM17543	020	2022-08-02
High Pass Filter 6GHz	Micro-Tronics	HPS17542	009	2022-08-02
High Pass Filter 6GHz	Micro-Tronics	HPS17542	016	2022-08-02
High Pass Filter 6GHz	Micro-Tronics	HPS17542	020	2022-08-02
LISN	R&S	ENV-216	101837	2022-08-05
Antenna, Loop, 9kHz-30MHz	R&S	HFH2-Z2	100418	2023-10-06
UL Software				
Description	Manufacturer	Model	Version	
Radiated software	UL	UL EMC	Ver 9.5	
AC Line Conducted software	R&S	EMC32	V10.60.10	

8. TEST RESULTS SUMMARY

FCC Part Section	IC Section	Test Description	Test Limit	Test Condition	Test Result
15.247 (a)(2)	RSS-247 5.2(a)	Occupied Bandwidth(6dB)	> 500kHz	Conducted	PASS
2.1051, 15.247(d)	RSS-247 5.5	Band Edge / Conducted Spurious Emission	-20 dBc		PASS
15.247 (b)(3)	RSS-247 5.4(d)	TX conducted output power	< 30 dBm		PASS
15.247(e)	RSS-247 5.4(b)	PSD	< 8 dBm/3kHz		PASS
15.207(a)	RSS-GEN Clause 7.2&8.8	AC Power Line conducted emissions	Section 11	Power Line conducted	N/A
15.205, 15.209	RSS-GEN Clause 8.9 & 8.10	Radiated Spurious Emission	< 54dBuV/m(Av)	Radiated	PASS

9. ANTENNA PORT TEST RESULTS

9.1. ON TIME AND DUTY CYCLE

LIMITS

None; for reporting purposes only.

Mode	On time [msec]	Period [msec]	Duty cycle x [Linear]	Duty Cycle [%]	Duty Cycle Correction Factor [dB]	1/T Minimum CBW [kHz]
2 400 ~ 2 483.5 MHz Bands						
1 Mbps [37pkt]	101	101	1	100	0	N/A



9.2. 6 dB & 99% BANDWIDTH

LIMITS

FCC §15.247 (a) (2)

RSS-247 5.2 (a)


The minimum 6 dB bandwidth shall be at least 500 kHz.

RESULTS

9.2.1. Zigbee

Channel	Frequency [MHz]	6 dB Bandwidth [MHz]	Minimum Limit [kHz]	99% Bandwidth [MHz]
Low	2 405	1.634	500.0	2.2344
Mid	2 440	1.637	500.0	2.2418
High	2 470	1.632	500.0	2.2437

9.2.2. 6 dB & 99% BANDWIDTH PLOTS

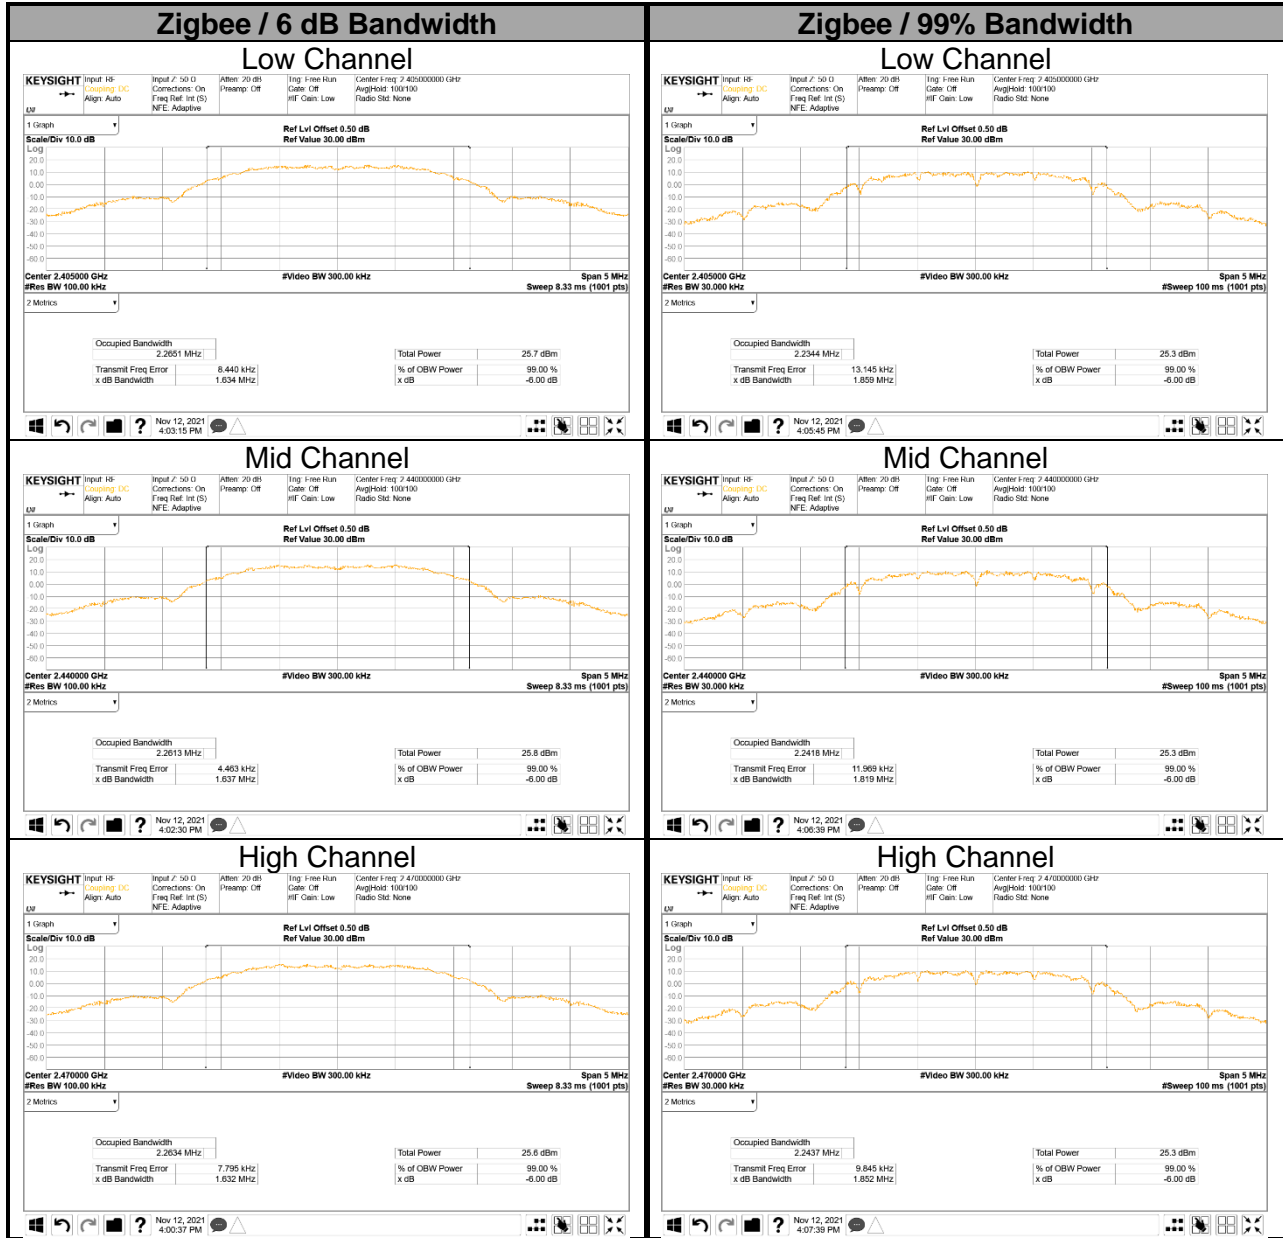

9.3. OUTPUT POWER

LIMITS

FCC §15.247 (b) (3)

The maximum antenna gain is less than or equal to 6 dBi, therefore the limit is 30 dBm.

TEST PROCEDURE


Peak power is measured using ANSI C63.10(2013) under section 11.9.1.1 utilizing spectrum analyzer.

RESULTS

9.3.1. Zigbee

Channel	Frequency [MHz]	Peak Power [dBm]	Limit [dBm]	Margin [dB]
Low	2405	18.34	30.00	-11.66
Mid	2440	18.16	30.00	-11.84
High	2470	18.16	30.00	-11.84
Worst		18.34	30.00	-11.66

9.3.2. PEAK POWER PLOTS

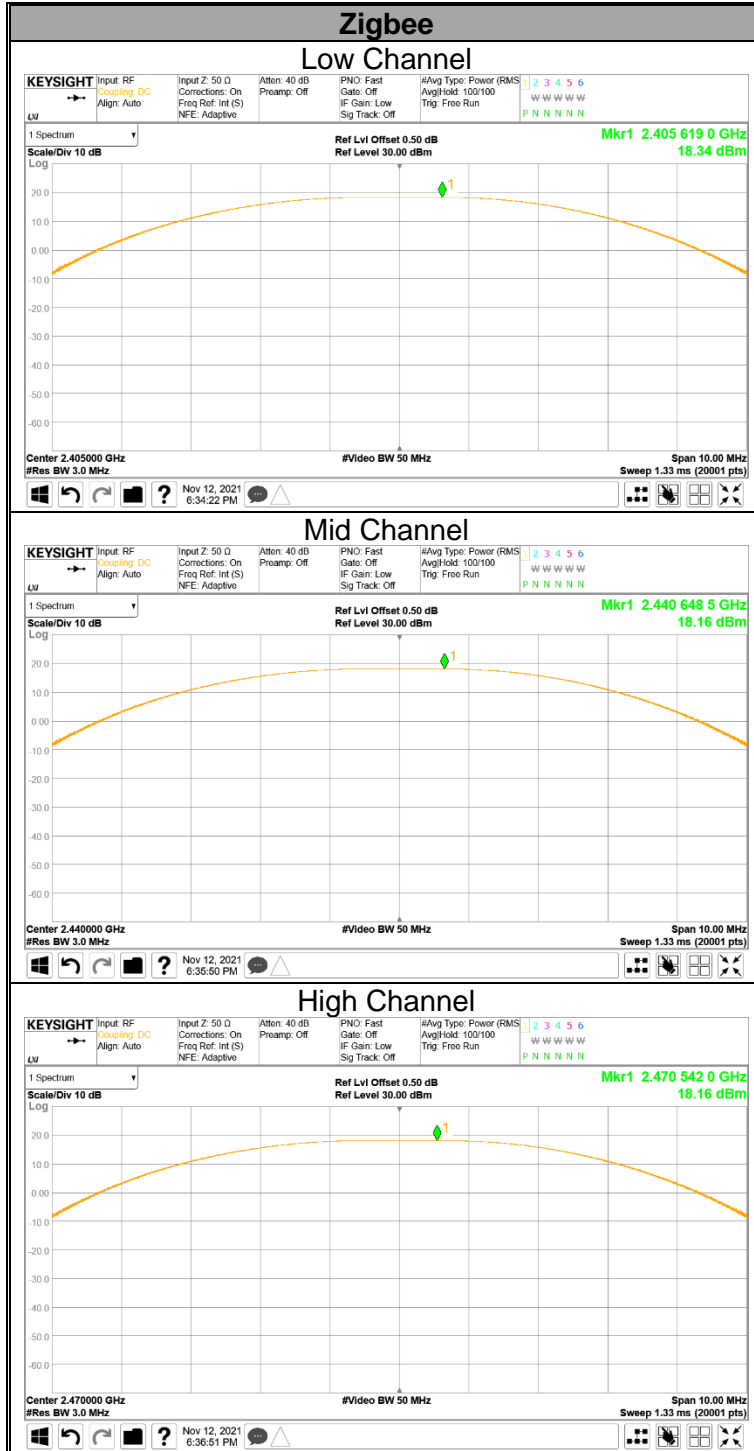

9.4. POWER SPECTRAL DENSITY

LIMITS

FCC §15.247 (e)

RSS-247 (5.2) (b)


The power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

RESULTS

9.4.1. Zigbee

Channel	Frequency [MHz]	PSD [dBm/3kHz]	Limit [dBm/3kHz]	Margin [dB]
Low	2405	2.83	8.00	-5.17
Mid	2440	2.72	8.00	-5.28
High	2470	2.76	8.00	-5.24

9.4.2. PSD TEST PLOTS

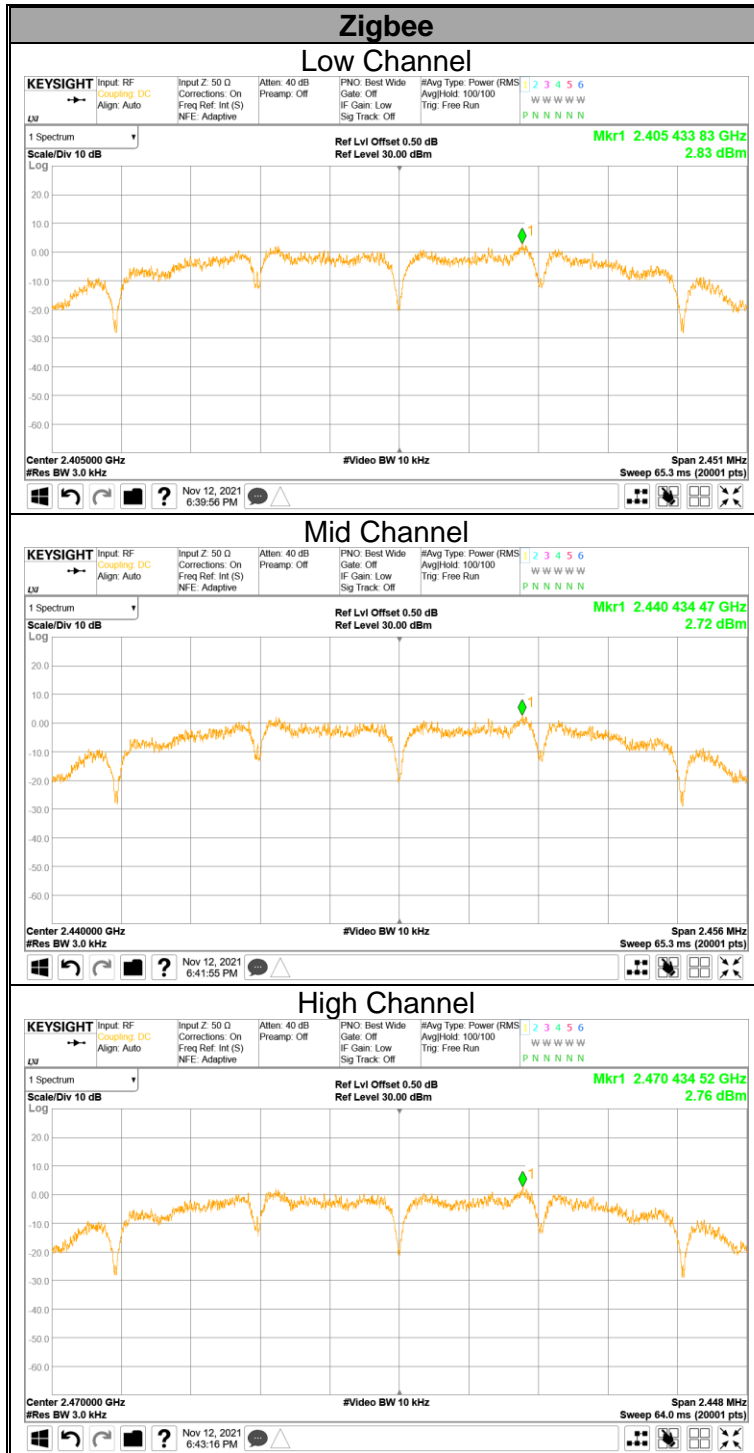

9.5. CONDUCTED SPURIOUS EMISSIONS

LIMITS







FCC §15.247 (d)

RSS-247 5.5

Output power was measured based on the use of a peak measurement.
Therefore, spurious emissions are required to be 20 dBc.

RESULTS

9.5.1. Zigbee

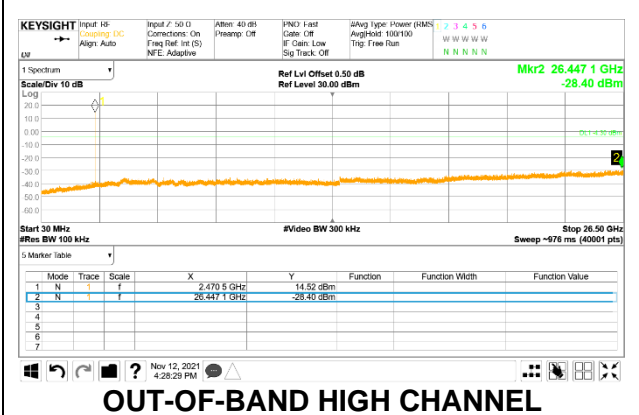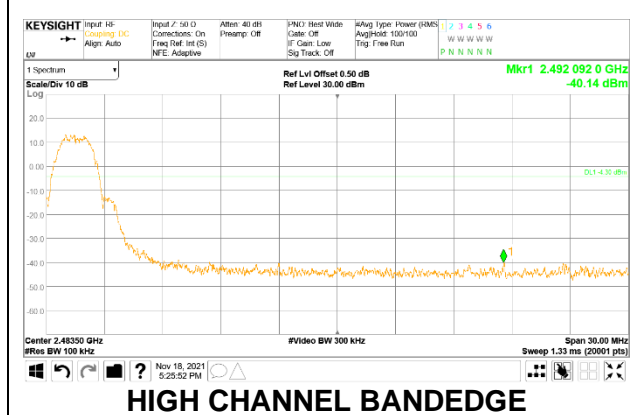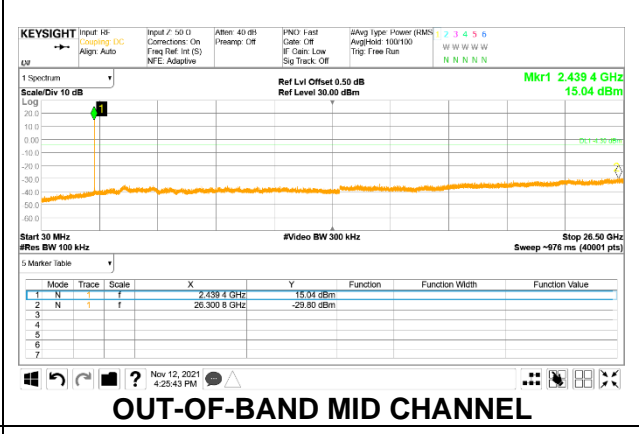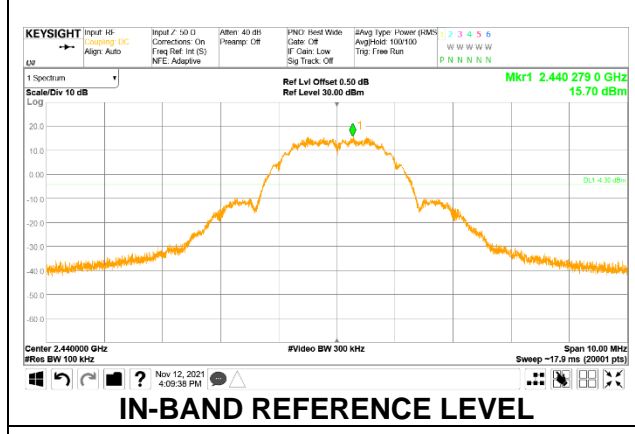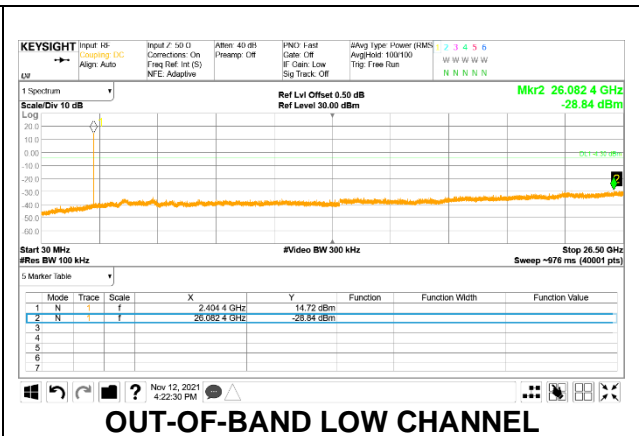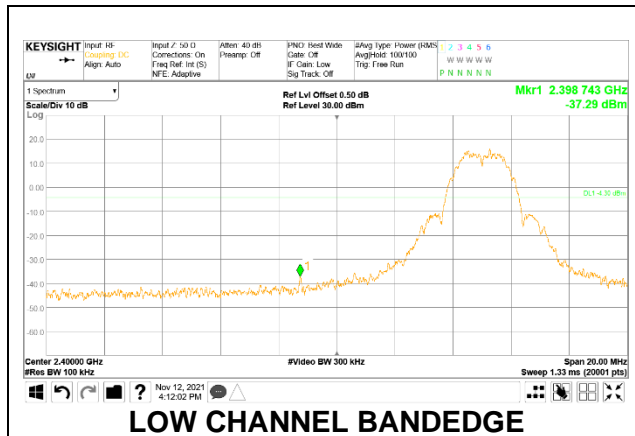

10. RADIATED TEST RESULTS

10.1. LIMITS AND PROCEDURE

LIMITS

FCC §15.205 and §15.209

Limits for radiated disturbance of an intentional radiator		
Frequency range (MHz)	Limits ($\mu\text{V/m}$)	Measurement Distance (m)
0.009 – 0.490	2400 / F (kHz)	300
0.490 – 1.705	24000 / F (kHz)	30
1.705 – 30.0	30	30
30 – 88	100**	3
88 - 216	150**	3
216 – 960	200**	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g. §§ 15.231 and 15.241.

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane for below 1GHz and 150 cm for above 1GHz. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and add duty cycle factor for average measurements. (Restricted bandedge, Final detection of spurious harmonic emissions) Duty cycle factor = $10 \log(1/x)$. For this sample: For Zigbee, DCF = $10 \log(1/1) = 0$ dB

Pre-scans to detect harmonic and spurious emissions, the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 30 kHz for peak measurements.

The spectrum from 1 GHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.
(From 30MHz to 1GHz, test was performed with the EUT set to transmit at the channel with highest output power)

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

Note : Emission was pre-scanned from 9kHz to 30MHz; No emissions were detected which was at least 20dB below the specification limit (consider distance correction factor).
Per FCC part 15.31(o), test results were not reported.


Although these tests were performed other than open field test site, adequate comparison measurements were confirmed against 30 m open field test site.
Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the one of tests made in an open field based on KDB 414788.

10.2. TRANSMITTER ABOVE 1 GHz

10.2.1. Zigbee

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

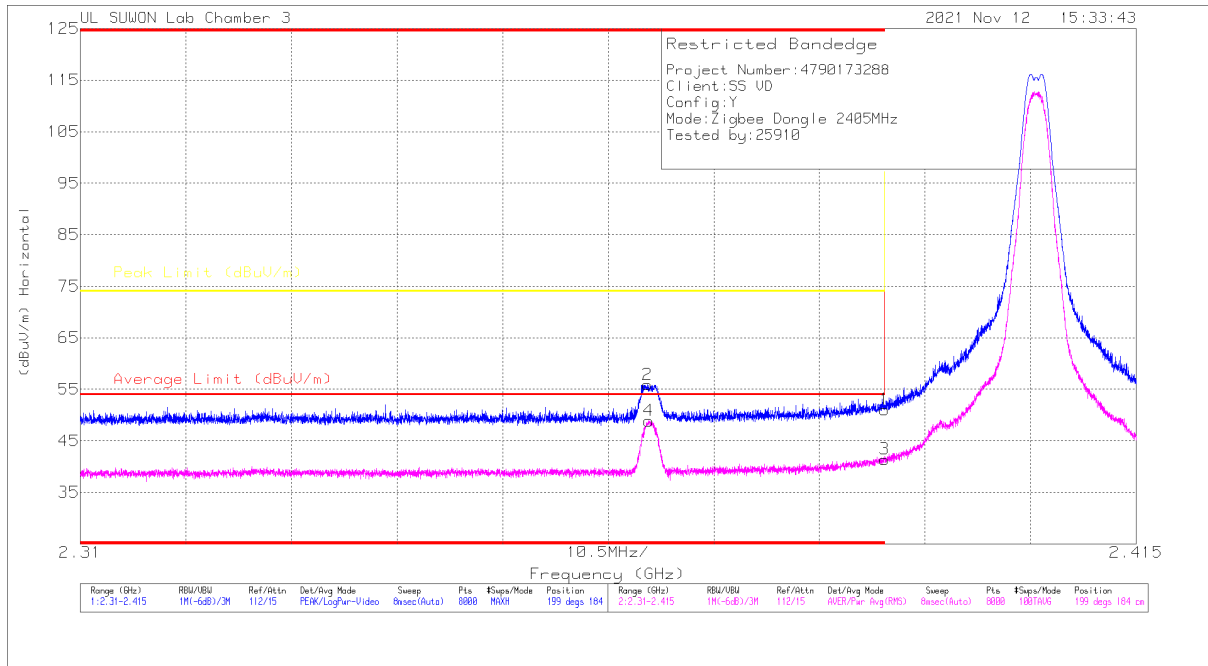


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00218957	10dB_ATT[dB]	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	43.68	Pk	32.8	-25.4	51.08	-	-	74	-22.92	199	184	H
2	* 2.36639	48.61	Pk	32.7	-25.4	55.91	-	-	74	-18.09	199	184	H
3	* 2.39	34.02	RMS	32.8	-25.4	41.42	54	-12.58	-	-	199	184	H
4	* 2.36651	41.59	RMS	32.7	-25.4	48.89	54	-5.11	-	-	199	184	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

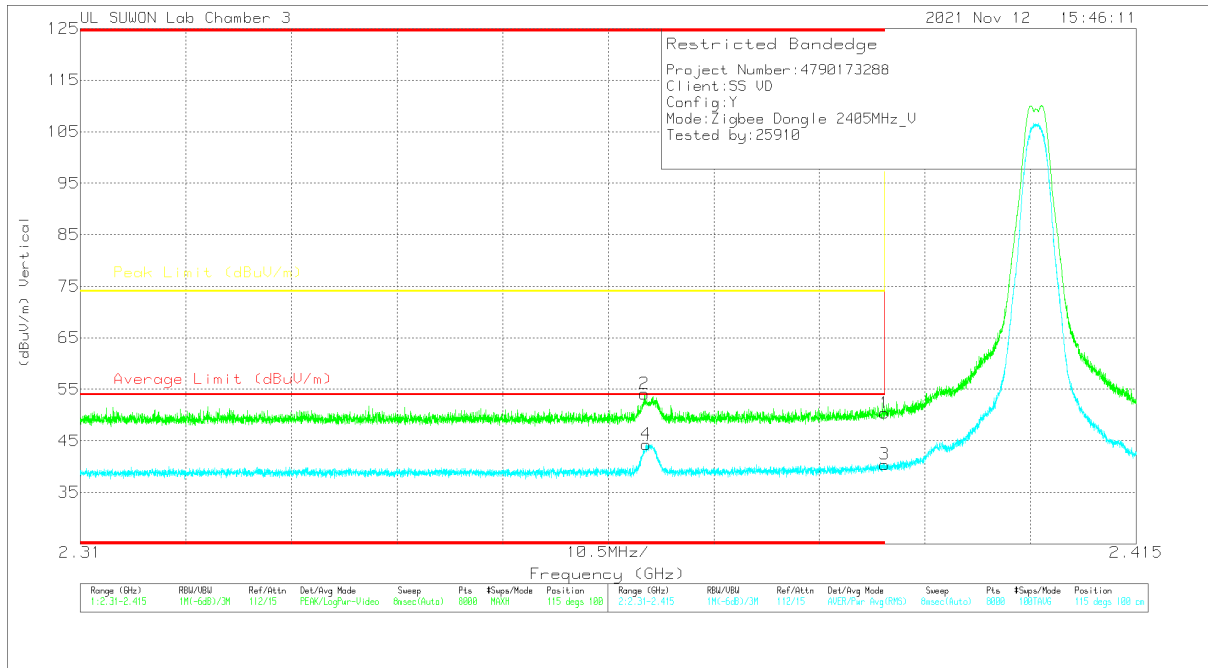


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00218957	10dB_ATT[dB]	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	43	Pk	32.8	-25.4	50.4	-	-	74	-23.6	115	100	V
2	* 2.36608	46.85	Pk	32.7	-25.4	54.15	-	-	74	-19.85	115	100	V
3	* 2.39	33.04	RMS	32.8	-25.4	40.44	54	-13.56	-	-	115	100	V
4	* 2.36629	37.03	RMS	32.7	-25.4	44.33	54	-9.67	-	-	115	100	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

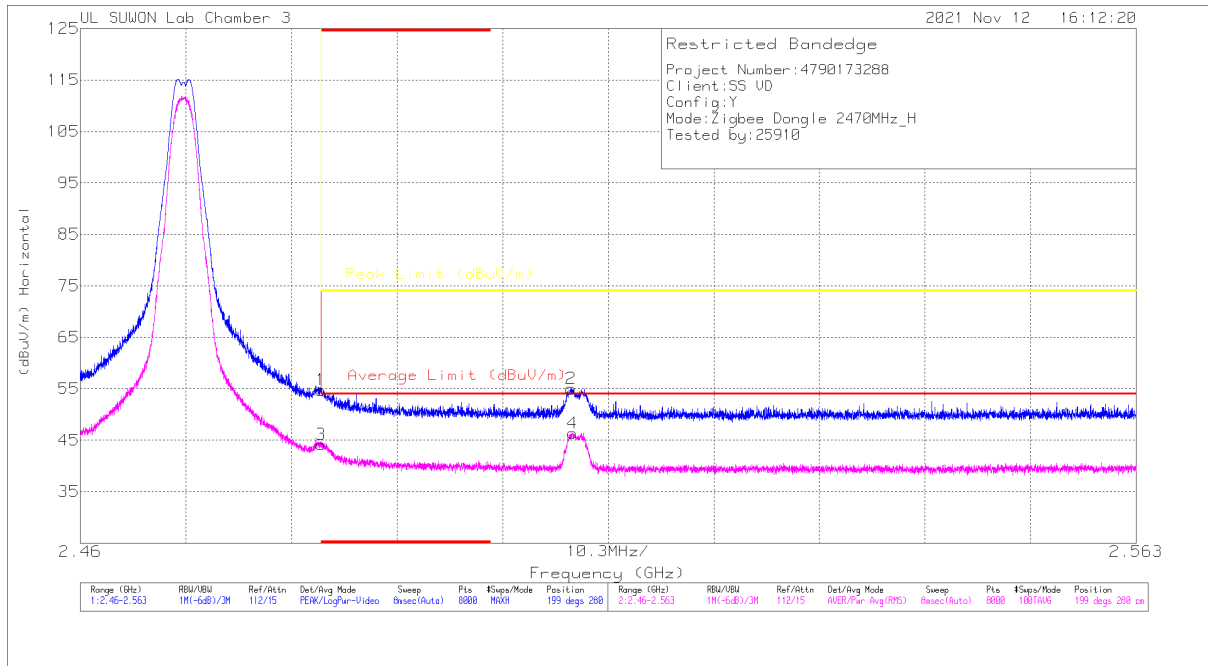


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00218957	10dB_ATT[dB]	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	47.14	Pk	32.9	-25.3	54.74	-	-	74	-19.26	199	280	H
2	2.50788	47.41	Pk	32.9	-25.3	55.01	-	-	74	-18.99	199	280	H
3	* 2.4835	36.54	RMS	32.9	-25.3	44.14	54	-9.86	-	-	199	280	H
4	2.50804	38.77	RMS	32.9	-25.3	46.37	54	-7.63	-	-	199	280	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

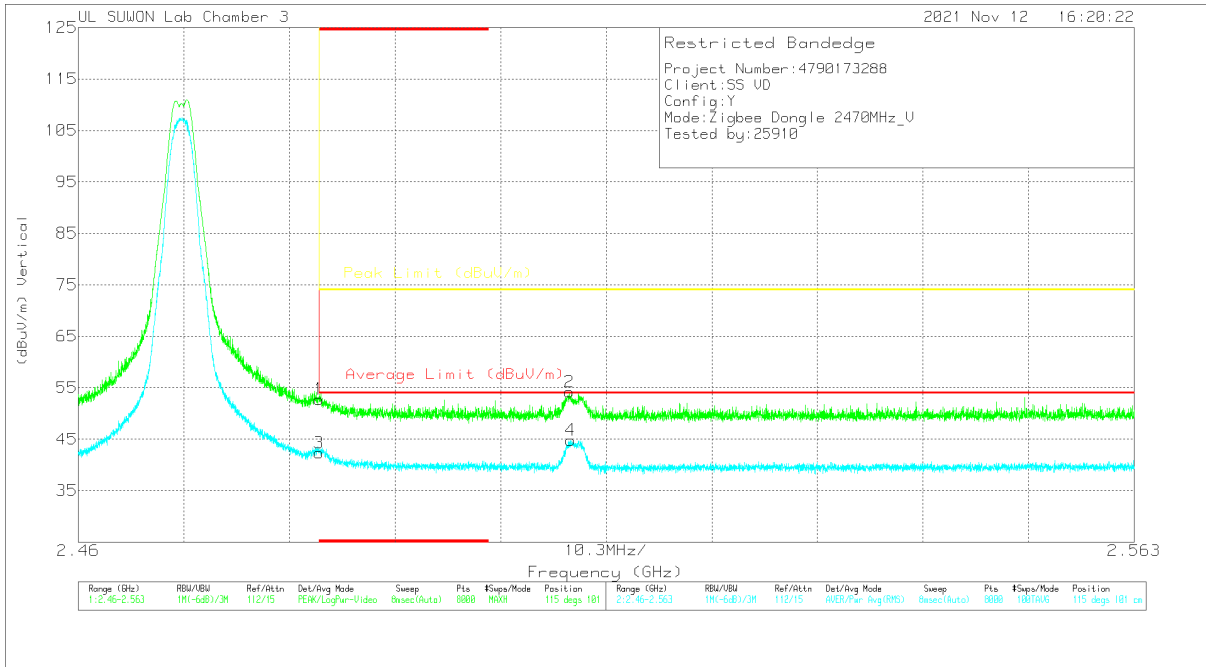


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00218957	10dB_ATT[dB]	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	45.17	Pk	32.9	-25.3	52.77	-	-	74	-21.23	115	101	V
2	2.50792	46.57	Pk	32.9	-25.3	54.17	-	-	74	-19.83	115	101	V
3	* 2.4835	34.73	RMS	32.9	-25.3	42.33	54	-11.67	-	-	115	101	V
4	2.50803	37.2	RMS	32.9	-25.3	44.8	54	-9.2	-	-	115	101	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

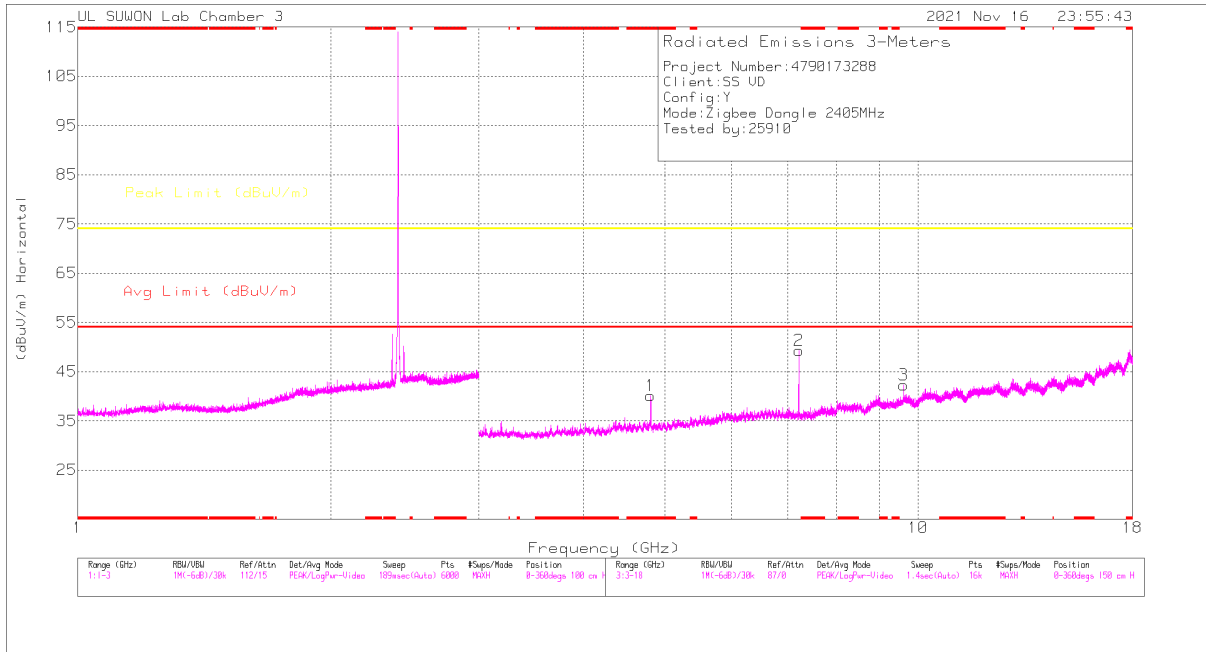

HORIZONTAL

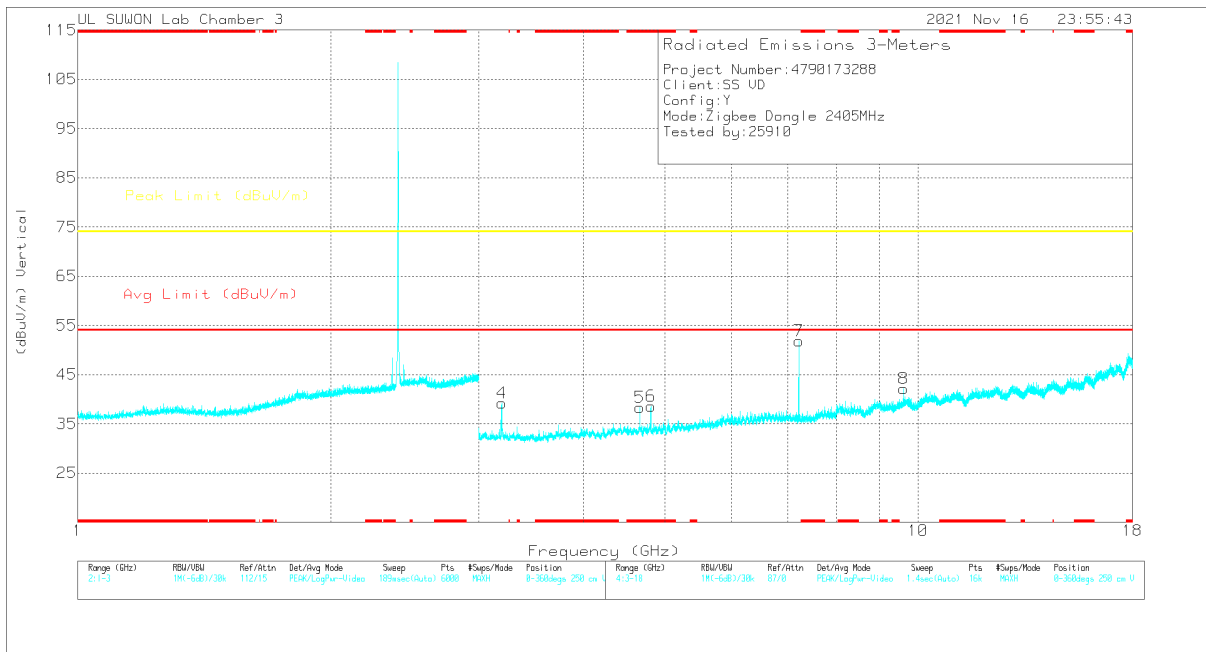

VERTICAL


Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

RADIATED EMISSIONS


Frequency (GHz)	Meter Reading (dBuV)	Det	3117_0021895 7	3GHz_HP[dB]	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.80883	44	PK2	34.6	-30.1	48.5	-	-	74	-25.5	209	124	H
* 4.81103	35.89	MAv1	34.6	-30.1	40.39	54	-13.61	-	-	209	124	H
7.21659	45.48	PK2	36.1	-25.6	55.98	-	-	74	-18.02	50	112	H
9.62252	35.76	PK2	37.3	-21.4	51.66	-	-	74	-22.34	328	100	H
3.19721	52.51	PK2	33.5	-33.2	52.81	-	-	74	-21.19	346	228	V
* 4.66625	41.91	PK2	34.5	-30.2	46.21	-	-	74	-27.79	170	165	V
* 4.66653	33.13	MAv1	34.5	-30.2	37.43	54	-16.57	-	-	170	165	V
* 4.81127	43.61	PK2	34.6	-30.1	48.11	-	-	74	-25.89	131	100	V
* 4.81096	35.01	MAv1	34.6	-30.1	39.51	54	-14.49	-	-	131	100	V
7.21343	49.09	PK2	36.1	-25.6	59.59	-	-	74	-14.41	332	117	V
9.62218	36.61	PK2	37.3	-21.4	52.51	-	-	74	-21.49	187	128	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK2 - KDB558074 Method: Maximum Peak
 MAv1 - KDB558074 Option 1 Maximum RMS Average

MID CHANNEL RESULTS

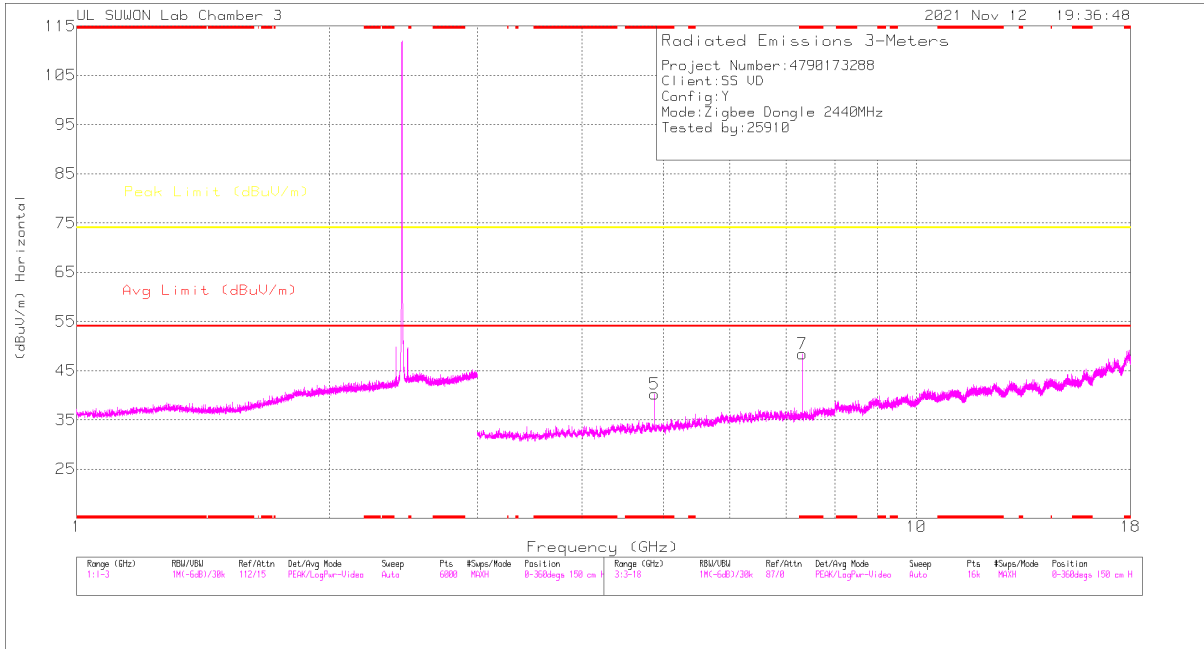

HORIZONTAL

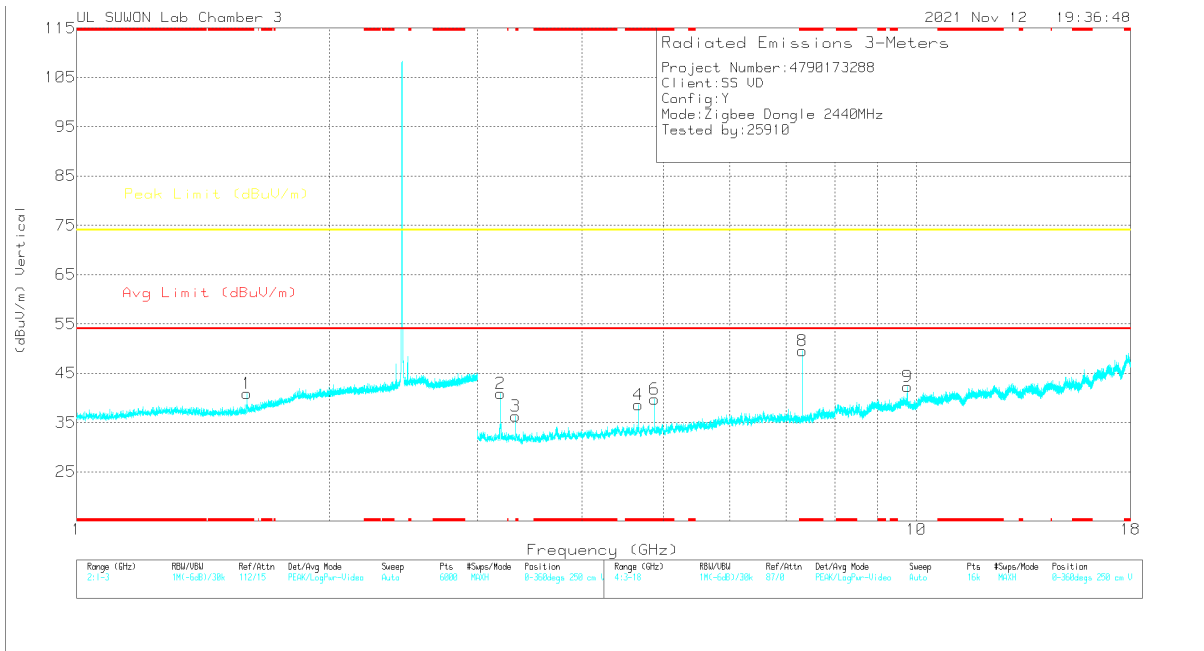

VERTICAL

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.


RADIATED EMISSIONS

Frequency (GHz)	Meter Reading (dBuV)	Det	3117_0021895 7	10dB_ATT[dB]	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 1.59557	49.68	PK2	28.9	-26.2	52.38	-	-	74	-21.62	23	116	V
* 1.59494	34.02	MAv1	28.9	-26.2	36.72	54	-17.28	-	-	23	116	V


Frequency (GHz)	Meter Reading (dBuV)	Det	3117_0021895 7	3GHz_HP[dB]	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.87904	39.66	MAv1	34.7	-30.8	43.56	54	-10.44	-	-	188	259	H
* 7.3183	38.82	MAv1	36	-25	49.82	54	-4.18	-	-	151	263	H
3.19664	32.93	MAv1	33.5	-33.2	33.23	-	-	-	-	182	139	V
* 3.3333	34.15	MAv1	33.3	-32.8	34.65	54	-19.35	-	-	179	229	V
* 4.66653	33.81	MAv1	34.5	-30.2	38.11	54	-15.89	-	-	184	251	V
* 4.87896	32.23	MAv1	34.7	-30.8	36.13	54	-17.87	-	-	123	110	V
* 7.31847	39.75	MAv1	36	-25	50.75	54	-3.25	-	-	47	104	V
* 4.87893	46.68	PK2	34.7	-30.8	50.58	-	-	74	-23.42	188	259	H
* 7.3185	45.33	PK2	36	-25	56.33	-	-	74	-17.67	151	263	H
3.19769	51.85	PK2	33.5	-33.2	52.15	-	-	74	-21.85	182	139	V
* 3.33314	43.51	PK2	33.3	-32.8	44.01	-	-	74	-29.99	179	229	V
* 4.66652	42.58	PK2	34.5	-30.2	46.88	-	-	74	-27.12	184	251	V
* 4.88106	41.78	PK2	34.7	-30.9	45.58	-	-	74	-28.42	123	110	V
* 7.31835	45.77	PK2	36	-25	56.77	-	-	74	-17.23	47	104	V
9.75806	35.33	PK2	37.5	-21.2	51.63	-	-	74	-22.37	198	104	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK2 - KDB558074 Method: Maximum Peak
 MAv1 - KDB558074 Option 1 Maximum RMS Average

HIGH CHANNEL RESULTS

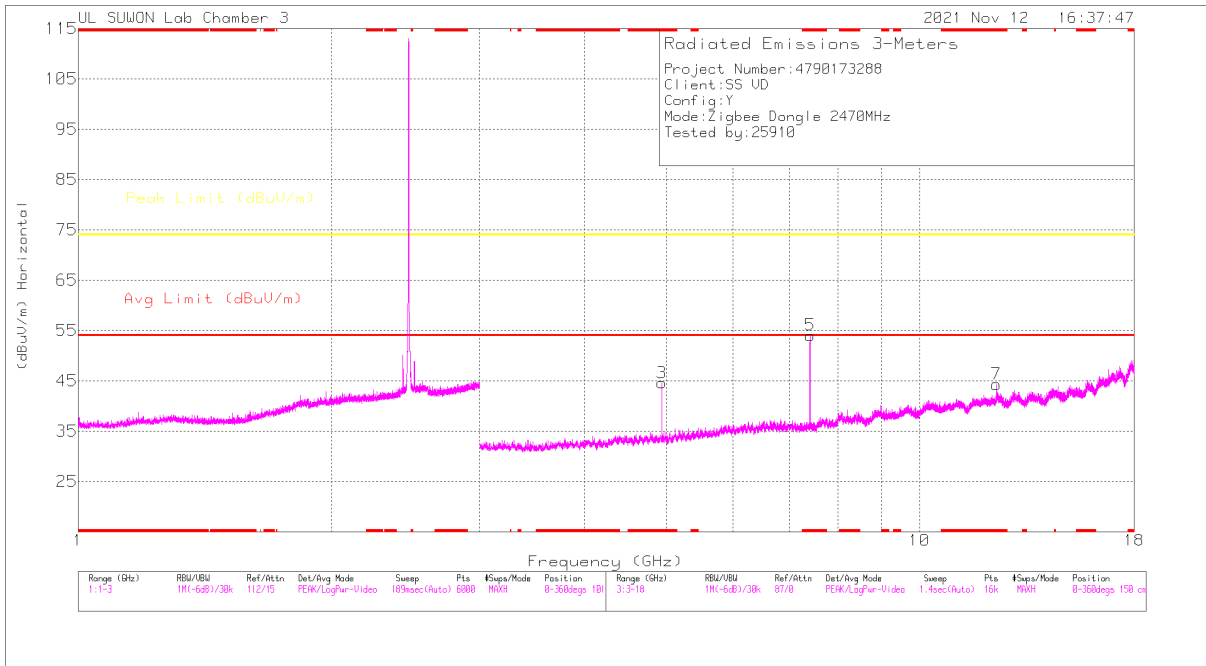

HORIZONTAL

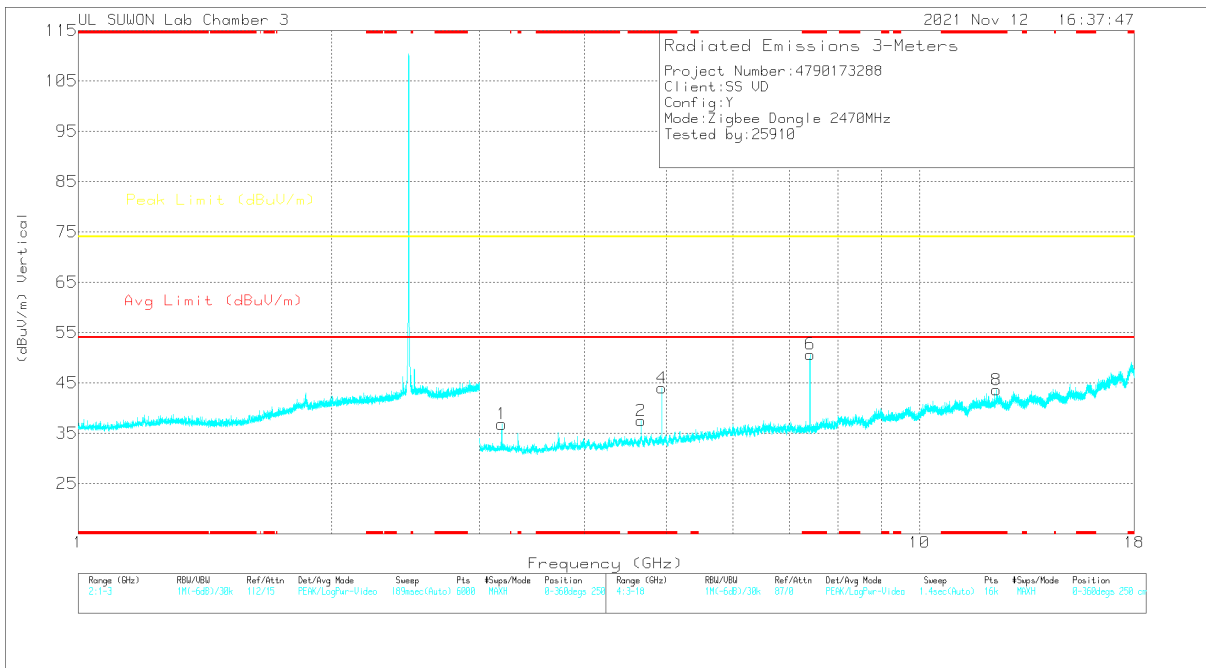

VERTICAL

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.


RADIATED EMISSIONS

Frequency (GHz)	Meter Reading (dBuV)	Det	3117_0021895 7	3GHz_HP[dB]	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.94109	47.42	PK2	34.7	-30.8	51.32	-	-	74	-22.68	186	302	H
* 4.93905	40.57	MAV1	34.7	-30.8	44.47	54	-9.53	-	-	186	302	H
* 7.41164	45.22	PK2	36	-24.4	56.82	-	-	74	-17.18	112	245	H
* 7.40843	38.97	MAV1	36	-24.3	50.67	54	-3.33	-	-	112	245	H
* 12.34721	35.36	PK2	39.3	-22.2	52.46	-	-	74	-21.54	310	107	H
* 12.34752	23.45	MAV1	39.3	-22.2	40.55	54	-13.45	-	-	310	107	H
3.1992	49.55	PK2	33.5	-33.1	49.95	-	-	74	-24.05	145	122	V
* 4.66616	41.6	PK2	34.5	-30.2	45.9	-	-	74	-28.1	176	266	V
* 4.66658	32.29	MAV1	34.5	-30.2	36.59	54	-17.41	-	-	176	266	V
* 4.9389	42.19	PK2	34.7	-30.8	46.09	-	-	74	-27.91	153	361	V
* 4.93917	32.84	MAV1	34.7	-30.8	36.74	54	-17.26	-	-	153	361	V
* 7.41164	46.66	PK2	36	-24.4	58.26	-	-	74	-15.74	307	100	V
* 7.41176	40.69	MAV1	36	-24.4	52.29	54	-1.71	-	-	307	100	V
* 12.34741	34.63	PK2	39.3	-22.2	51.73	-	-	74	-22.27	178	107	V
* 12.34753	23.75	MAV1	39.3	-22.2	40.85	54	-13.15	-	-	178	107	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK2 - KDB558074 Method: Maximum Peak

10.3. WORST CASE BELOW 1 GHZ

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION)

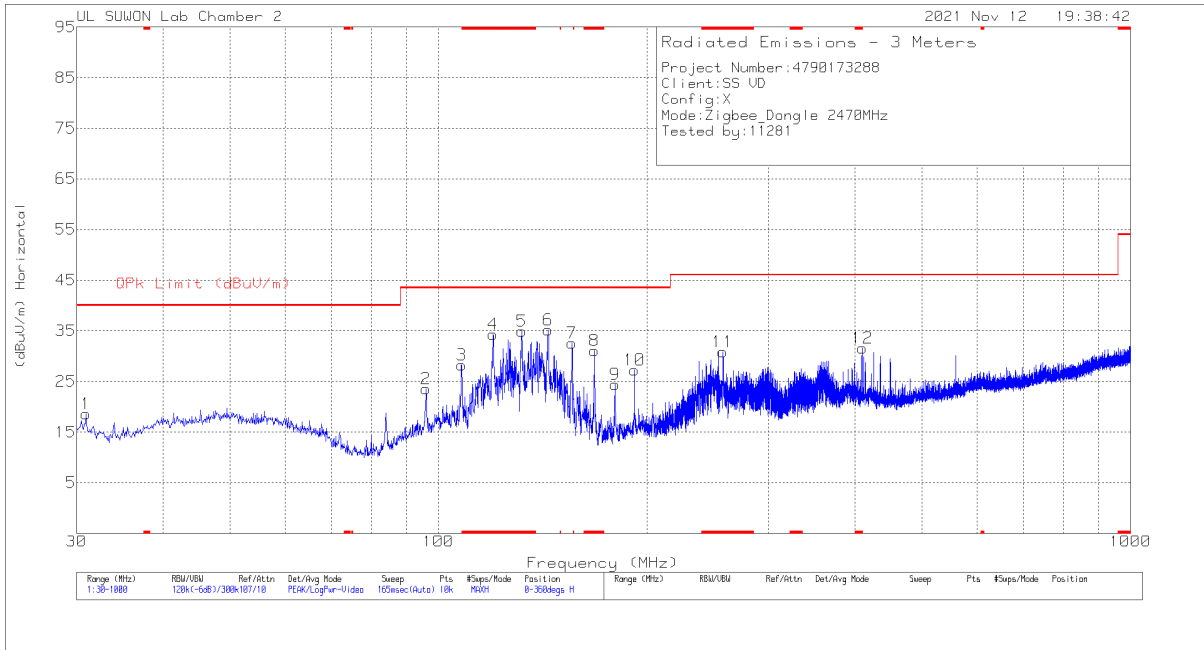

HORIZONTAL

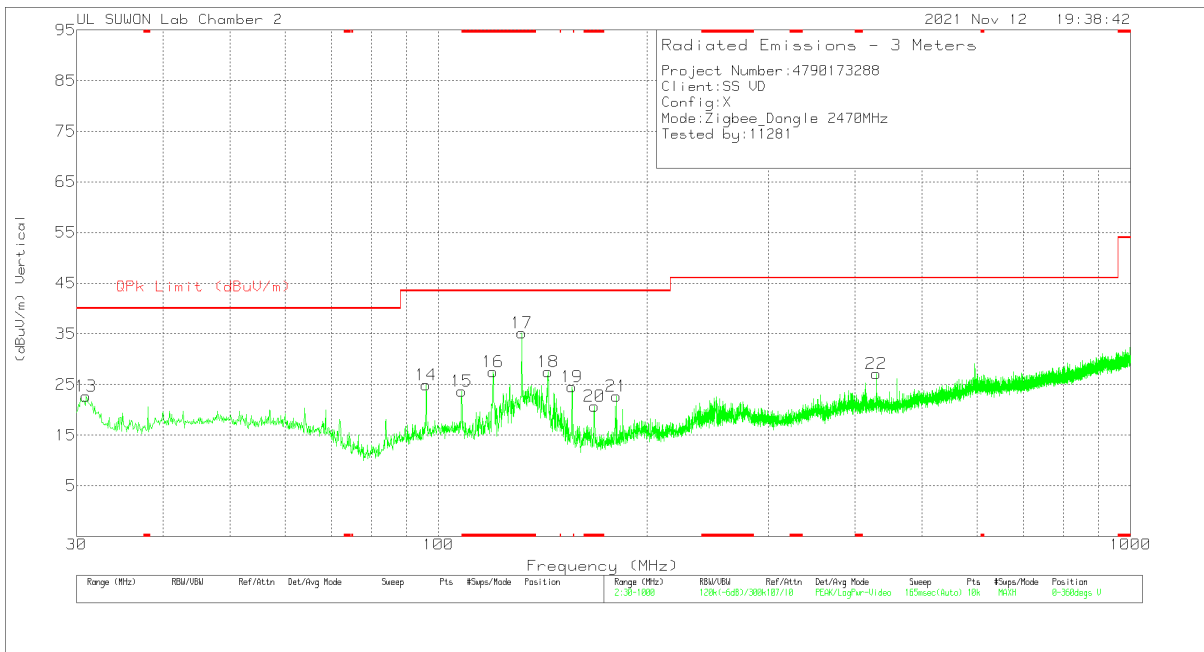

VERTICAL

Below 1GHz Data

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	VULB9163_749	Below 1G[dB]	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	30.97	35.14	Pk	15.4	-31.9	18.64	40	-21.36	0-360	300	H
2	95.96	37.99	Pk	16.8	-31.3	23.49	43.52	-20.03	0-360	200	H
3	107.988	42.28	Pk	17.3	-31.3	28.28	43.52	-15.24	0-360	200	H
4	* 119.919	50.23	Pk	15.4	-31.3	34.33	43.52	-9.19	0-360	200	H
5	* 131.947	51.88	Pk	14.1	-31.1	34.88	43.52	-8.64	0-360	100	H
6	143.975	52.61	Pk	13.7	-31.1	35.21	43.52	-8.31	0-360	100	H
7	156.003	49.52	Pk	14	-30.9	32.62	43.52	-10.9	0-360	100	H
8	* 168.031	47.51	Pk	14.5	-30.9	31.11	43.52	-12.41	0-360	100	H
9	179.962	40.01	Pk	15.3	-30.9	24.41	43.52	-19.11	0-360	100	H
10	191.99	41.33	Pk	16.7	-30.8	27.23	43.52	-16.29	0-360	100	H
11	* 257.756	42.84	Pk	18.5	-30.5	30.84	46.02	-15.18	0-360	100	H
12	* 409.949	39.93	Pk	21.7	-30	31.63	46.02	-14.39	0-360	200	H
13	30.97	39.22	Pk	15.4	-31.9	22.72	40	-17.28	0-360	100	V
14	95.96	39.45	Pk	16.8	-31.3	24.95	43.52	-18.57	0-360	100	V
15	* 108.085	37.64	Pk	17.3	-31.3	23.64	43.52	-19.88	0-360	100	V
16	* 119.919	43.39	Pk	15.4	-31.3	27.49	43.52	-16.03	0-360	100	V
17	* 131.947	52.2	Pk	14.1	-31.1	35.2	43.52	-8.32	0-360	200	V
18	143.878	44.75	Pk	13.7	-31	27.45	43.52	-16.07	0-360	100	V
19	156.003	41.43	Pk	14	-30.9	24.53	43.52	-18.99	0-360	100	V
20	* 167.934	37.11	Pk	14.5	-30.9	20.71	43.52	-22.81	0-360	100	V
21	180.835	38.23	Pk	15.4	-30.9	22.73	43.52	-20.79	0-360	100	V
22	429.252	35.05	Pk	22.1	-30	27.15	46.02	-18.87	0-360	100	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector

11. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

RSS-Gen 8.8


Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

RESULTS

11.1.1. AC Power Line

LINE 1 RESULTS

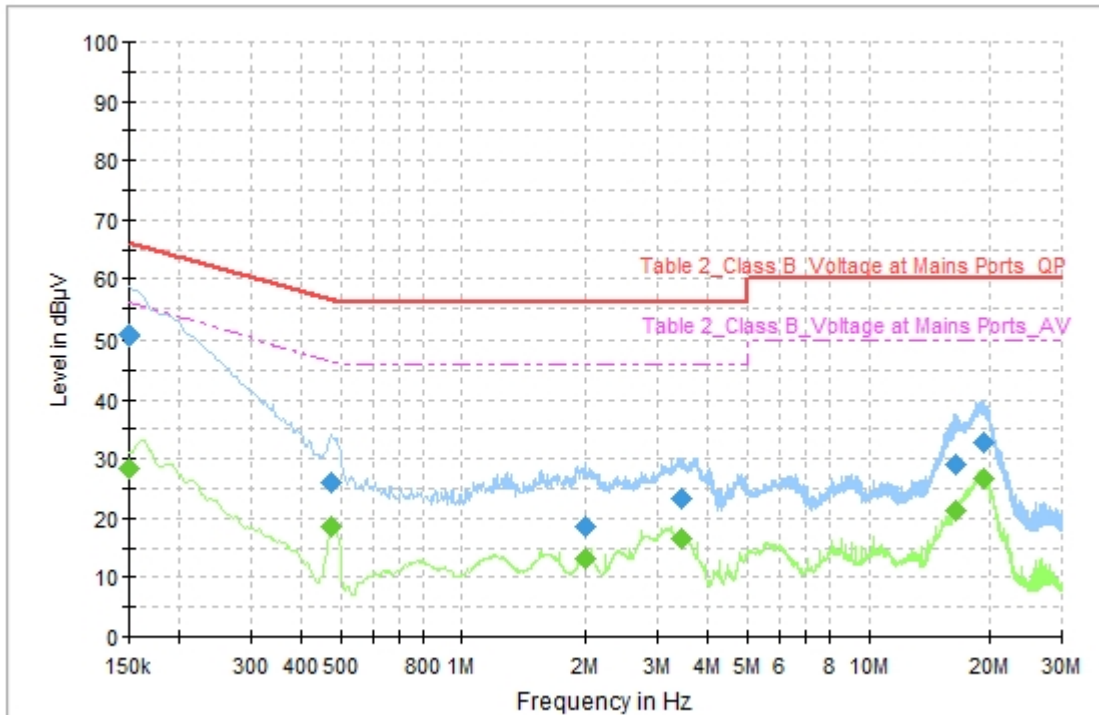


Final Result_QPK

Frequency (MHz)	QuasiPeak (dBµV)	Limit (dBµV)	Margin (dB)	Line	Filter	Corr. (dB)
0.150000	50.81	66.00	15.19	L1	ON	9.7
0.472000	25.99	56.48	30.49	L1	ON	9.9
1.985000	18.47	56.00	37.53	L1	ON	9.7
3.425000	23.26	56.00	32.74	L1	ON	9.7
16.483333	29.00	60.00	31.00	L1	ON	10.0
19.166667	32.73	60.00	27.27	L1	ON	10.0

Final Result_CAV

Frequency (MHz)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Line	Filter	Corr. (dB)
0.150000	28.54	56.00	27.46	L1	ON	9.7
0.472000	18.68	46.48	27.80	L1	ON	9.9
1.985000	13.21	46.00	32.79	L1	ON	9.7
3.425000	16.66	46.00	29.34	L1	ON	9.7
16.483333	21.31	50.00	28.69	L1	ON	10.0
19.166667	26.84	50.00	23.16	L1	ON	10.0

LINE 2 RESULTS

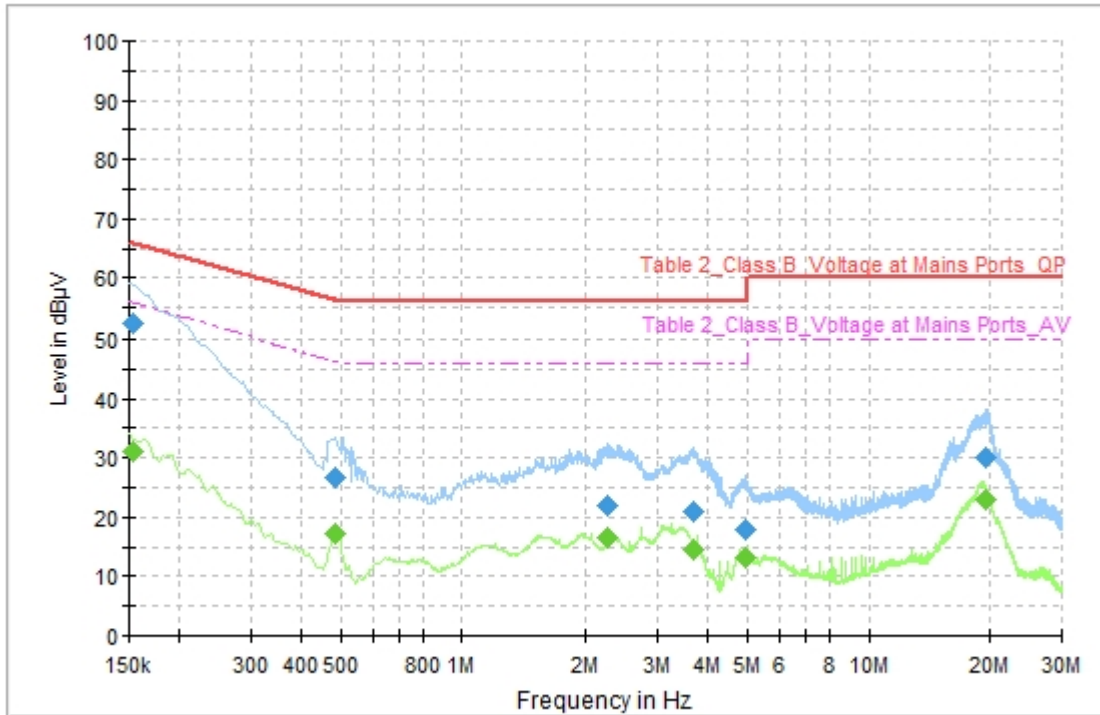

Final Result QPK

Frequency (MHz)	QuasiPeak (dBµV)	Limit (dBµV)	Margin (dB)	Line	Filter	Corr. (dB)
0.153500	52.35	65.81	13.46	N	ON	9.7
0.486000	26.83	56.24	29.41	N	ON	9.9
2.258750	21.96	56.00	34.04	N	ON	9.7
3.702500	20.84	56.00	35.16	N	ON	9.8
4.936250	17.74	56.00	38.26	N	ON	9.8
19.541667	29.96	60.00	30.04	N	ON	10.0

Final Result CAV

Frequency (MHz)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Line	Filter	Corr. (dB)
0.153500	31.16	55.81	24.65	N	ON	9.7
0.486000	17.08	46.24	29.16	N	ON	9.9
2.258750	16.50	46.00	29.50	N	ON	9.7
3.702500	14.60	46.00	31.40	N	ON	9.8
4.936250	13.25	46.00	32.75	N	ON	9.8
19.541667	23.03	50.00	26.97	N	ON	10.0

END OF TEST REPORT