

ELECTROMAGNETIC EMISSION COMPLIANCE REPORT FOR LOW-POWER, NON-LICENSED TRANSMITTER

Test Report No. : OT-209-RWD-048
Reception No. : 2008003235
Applicant : Samsung Electronics Co Ltd
Address : 19 Chapin Rd., Building D, Pine Brook, New Jersey, 07058, United States
Manufacturer : Samsung Electronics Co Ltd
Address : 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do 16677, Korea
Type of Equipment : Wi-Fi/BT Transceiver
FCC ID. : A3LWCA731M
Model Name : WCA731M
Multiple Model Name : WCA734M
Serial number : N/A
Total page of Report : 184 pages (including this page)
Date of Incoming : August 20, 2020
Date of issue : September 21, 2020

SUMMARY


The equipment complies with the regulation; *FCC PART 15 SUBPART C Section 15.247*
 This test report only contains the result of a single test of the sample supplied for the examination.
 It is not a generally valid assessment of the features of the respective products of the mass-production.



Tested by
 Ju Yun Park / Assistant Manager
 ONETECH Corp.



Reviewed by
 Tae-Ho, Kim / Senior Manager
 ONETECH Corp.

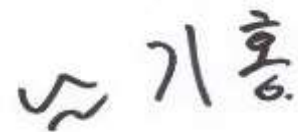

Approved by
 Ki-Hong, Nam / General Manager
 ONETECH Corp.

CONTENTS**PAGE**

1. VERIFICATION OF COMPLIANCE	7
2. TEST SUMMARY.....	8
2.1 TEST ITEMS AND RESULTS	8
2.2 ADDITIONS, DEVIATIONS, EXCLUSIONS FROM STANDARDS.....	8
2.3 RELATED SUBMITTAL(S) / GRANT(S)	8
2.4 PURPOSE OF THE TEST	8
2.5 TEST METHODOLOGY.....	8
2.6 TEST FACILITY.....	8
3. GENERAL INFORMATION.....	9
3.1 PRODUCT DESCRIPTION.....	9
3.2 ALTERNATIVE TYPE(S)/MODEL(S); ALSO COVERED BY THIS TEST REPORT.....	14
4. EUT MODIFICATIONS.....	14
5. SYSTEM TEST CONFIGURATION	15
5.1 JUSTIFICATION.....	15
5.2 PERIPHERAL EQUIPMENT	15
5.3 MODE OF OPERATION DURING THE TEST	16
5.4 CONFIGURATION OF TEST SYSTEM.....	23
5.5 ANTENNA REQUIREMENT	23
6. PRELIMINARY TEST	23
6.1 AC POWER LINE CONDUCTED EMISSIONS TESTS.....	23
6.2 GENERAL RADIATED EMISSIONS TESTS	23
7. MIMIMUM 6 DB BANDWIDTH	24
7.1 OPERATING ENVIRONMENT	24
7.2 TEST SET-UP	24
7.3 TEST DATE	24
7.4 TEST DATA FOR 802.11B WLAN MODE.....	25
7.4.1 Test data for Antenna 0	25
7.4.2 Test data for Antenna 1	28
7.5 TEST DATA FOR 802.11G WLAN MODE	31
7.5.1 Test data for Antenna 0	31
7.5.2 Test data for Antenna 1	34
7.6 TEST DATA FOR 802.11N_HT20 WLAN MODE.....	37
7.6.1 Test data for Antenna 0	37

7.6.2 Test data for Antenna 1	40
7.7 TEST DATA FOR 802.11N_HT40 WLAN MODE	43
7.7.1 Test data for Antenna 0	43
7.7.2 Test data for Antenna 1	46
8. MAXIMUM CONDUCTED (AVERAGE) OUTPUT POWER	49
8.1 OPERATING ENVIRONMENT	49
8.2 TEST SET-UP	49
8.3 TEST DATE	49
8.4 TEST DATA FOR 802.11B WLAN MODE `	50
8.4.1 Test data for Antenna 0	50
8.4.2 Test data for Antenna 1	50
8.5 TEST DATA FOR 802.11G WLAN MODE	51
8.5.1 Test data for Antenna 0	51
8.5.2 Test data for Antenna 1	51
8.5.3 Test data for Multiple Transmit	51
8.6 TEST DATA FOR 802.11N_HT20 WLAN MODE	52
8.6.1 Test data for Antenna 0	52
8.6.2 Test data for Antenna 1	52
8.6.3 Test data for Multiple Transmit	52
8.7 TEST DATA FOR 802.11N_HT40 WLAN MODE	53
8.7.1 Test data for Antenna 0	53
8.7.2 Test data for Antenna 1	53
8.7.3 Test data for Multiple Transmit	53
9. 100 KHZ BANDWIDTH OUTSIDE THE FREQUENCY BAND.....	54
9.1 OPERATING ENVIRONMENT	54
9.2 TEST SET-UP FOR CONDUCTED MEASUREMENT	54
9.3 TEST SET-UP FOR RADIATED MEASUREMENT	54
9.4 TEST DATE	54
9.5 TEST DATA FOR CONDUCTED EMISSION	55
9.5.1 Test data for 802.11b WLAN Mode.....	55
9.5.2 Test data for 802.11g WLAN Mode.....	71
9.5.3 Test data for 802.11n_HT20 WLAN Mode.....	87
9.5.4 Test data for 802.11n_HT40 WLAN Mode.....	103
9.6 TEST DATA FOR RADIATED EMISSION	119
9.6.1 Radiated Emission which fall in the Restricted Band.....	119
9.6.2 Spurious & Harmonic Radiated Emission.....	125

10. PEAK POWER SPECTRUL DENSITY	135
10.1 OPERATING ENVIRONMENT	135
10.2 TEST SET-UP	135
10.3 TEST DATE	135
10.4 TEST DATA FOR 802.11B WLAN MODE.....	136
<i>10.4.1 Test data for Antenna 0</i>	<i>136</i>
<i>10.4.2 Test data for Antenna 1</i>	<i>139</i>
10.5 TEST DATA FOR 802.11G WLAN MODE	142
<i>10.5.1 Test data for Antenna 0</i>	<i>142</i>
<i>10.5.2 Test data for Antenna 1</i>	<i>145</i>
<i>10.5.3 Test data for Multiple Transmit</i>	<i>148</i>
10.6 TEST DATA FOR 802.11N_HT20 WLAN MODE.....	149
<i>10.6.1 Test data for Antenna 0</i>	<i>149</i>
<i>10.6.2 Test data for Antenna 1</i>	<i>152</i>
<i>10.6.3 Test data for Multiple Transmit</i>	<i>155</i>
10.7 TEST DATA FOR 802.11N_HT40 WLAN MODE.....	156
<i>10.7.1 Test data for Antenna 0</i>	<i>156</i>
<i>10.7.2 Test data for Antenna 1</i>	<i>159</i>
<i>10.7.3 Test data for Multiple Transmit</i>	<i>162</i>
11. RADIATED EMISSION TEST	163
11.1 OPERATING ENVIRONMENT	163
11.2 TEST SET-UP	163
11.3 TEST DATE	163
11.4 TEST DATA FOR 30 MHZ ~ 1000 MHZ	164
<i>11.4.1 Test data for Basic Model (WCA731M)</i>	<i>164</i>
<i>11.4.2 Test data for Multiple Model (WCA734M)</i>	<i>167</i>
11.5 TEST DATA FOR BELOW 30 MHZ	170
11.6 TEST DATA FOR ABOVE 1 GHZ	170
12. CONDUCTED EMISSION TEST.....	171
12.1 OPERATING ENVIRONMENT	171
12.2 TEST SET-UP	171
12.3 TEST DATE	171
12.4 TEST DATA FOR BASIC MODEL (WCA731M).....	172
<i>12.4.1 Test data for WLAN 2.4 GHz</i>	<i>172</i>
<i>12.4.2 Test data for Intermodulation Mode(Bluetooth LE + WLAN 2.4 GHz + WLAN 5 GHz)</i>	<i>174</i>
<i>12.4.3 Test data for Intermodulation Mode(Bluetooth + WLAN 2.4 GHz + WLAN 5 GHz)</i>	<i>176</i>

12.5 TEST DATA FOR MULTIPLE MODEL (WCA734M) 178

12.5.1 Test data for WLAN 2.4 GHz 178

12.5.2 Test data for Intermodulation Mode(Bluetooth LE + WLAN 2.4 GHz + WLAN 5 GHz) 180


12.5.3 Test data for Intermodulation Mode(Bluetooth + WLAN 2.4 GHz + WLAN 5 GHz) 182

13. LIST OF TEST EQUIPMENT 184

Revision History

Rev. No.	Issue Report No.	Issued Date	Revisions	Section Affected
0	OT-209-RWD-048	September 21, 2020	Initial Release	All

1. VERIFICATION OF COMPLIANCE

Applicant : Samsung Electronics Co Ltd
 Address : 19 Chapin Rd., Building D, Pine Brook, New Jersey, 07058, United States
 Contact Person : Youngjoong Noh / Principal Engineer
 Telephone No. : +82-31-277-0598
 FCC ID : A3LWCA731M
 Model Name : WCA731M
 Brand Name : 
 Serial Number : N/A
 Date : September 21, 2020

EQUIPMENT CLASS	DTS – DIGITAL TRNSMISSION SYSTEM
E.U.T. DESCRIPTION	Modular Transmitter, Wi-Fi/BT Transceiver
THIS REPORT CONCERNS	Original Grant
MEASUREMENT PROCEDURES	ANSI C63.10: 2013
TYPE OF EQUIPMENT TESTED	Pre-Production
KIND OF EQUIPMENT AUTHORIZATION REQUESTED	Certification
EQUIPMENT WILL BE OPERATED UNDER FCC RULES PART(S)	FCC PART 15 SUBPART C Section 15.247 KDB 558074 D01 15.247 Meas Guidance v05r02
Modifications on the Equipment to Achieve Compliance	None
Final Test was Conducted On	3 m, Semi Anechoic Chamber

-. The above equipment was tested by ONETECH Corp. for compliance with the requirement set forth in the FCC Rules and Regulations. This said equipment in the configuration described in this report, shows the maximum emission levels emanating from equipment are within the compliance requirements.

2. TEST SUMMARY

2.1 Test items and results

SECTION	TEST ITEMS	RESULTS
15.247 (a) (2)	Minimum 6 dB Bandwidth	Met the Limit / PASS
15.247 (b) (3)	Maximum Conducted(average) Output Power	Met the Limit / PASS
15.247 (d)	100 kHz Bandwidth Outside the Frequency Band	Met the Limit / PASS
15.247 (d)	Radiated Emission which fall in the Restricted Band	Met the Limit / PASS
15.247 (e)	Peak Power Spectral Density	Met the Limit / PASS
15.209	Radiated Emission Limits	Met the Limit / PASS
15.207	Conducted Limits	Met the Limit / PASS
15.203	Antenna Requirement	Met requirement / PASS

2.2 Additions, deviations, exclusions from standards

No additions, deviations or exclusions have been made from standard.

2.3 Related Submittal(s) / Grant(s)

Original submittal only

2.4 Purpose of the test

To determine whether the equipment under test fulfills the requirements of the regulation stated in FCC PART 15 SUBPART C Section 15.247.

2.5 Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10: 2013. Radiated testing was performed at a distance of 3 m from EUT to the antenna.

2.6 Test Facility

The Onetech Corp. has been designated to perform equipment testing in compliance with ISO/IEC 17025.

The Electromagnetic compatibility measurement facilities are located at 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea.

-. Site Filing:

VCCI (Voluntary Control Council for Interference) – Registration No. R-4112/ C-14617/ G-10666/ T-11842

ISED (Innovation, Science and Economic Development Canada) – Registration No. Site# 3736A-3

KOLAS (Korea Laboratory Accreditation Scheme) - Accreditation NO. KT085

FCC (Federal Communications Commission) - Accreditation No. KR0013

RRA (Radio Research Agency) – Designation No. KR0013

3. GENERAL INFORMATION

3.1 Product Description

The Samsung Electronics Co Ltd, Model WCA731M (referred to as the EUT in this report) is a Wi-Fi/BT Transceiver. The product specification described herein was obtained from product data sheet or user’s manual.

DEVICE TYPE	Wi-Fi/BT Transceiver	
Temperature Range	-20 °C ~ 50 °C	
OPERATING FREQUENCY	Bluetooth LE	2 402 MHz ~ 2 480 MHz
	Bluetooth	2 402 MHz ~ 2 480 MHz
	WLAN 2.4 GHz	2 412 MHz ~ 2 472 MHz (802.11b/g/n(HT20))
		2 422 MHz ~ 2 462 MHz (802.11n(HT40))
	5 150 MHz ~ 5 250 MHz Band	5 180 MHz ~ 5 240 MHz (802.11a/n(HT20)/ac(VHT20))
		5 190 MHz ~ 5 230 MHz (802.11n(HT40)/ac(VHT40))
		5 210 MHz (802.11ac(VHT80))
	5 250 MHz ~ 5 350 MHz Band	5 260 MHz ~ 5 320 MHz (802.11a/n(HT20)/ac(VHT20))
		5 270 MHz ~ 5 310 MHz (802.11n(HT40)/ac(VHT40))
		5 290 MHz (802.11ac(VHT80))
	5 470 MHz ~ 5 725 MHz Band	5 500 MHz ~ 5 700 MHz (802.11a/n(HT20)/ac(VHT20))
		5 510 MHz ~ 5 670 MHz (802.11n(HT40)/ac(VHT40))
		5 530 MHz (802.11ac(VHT80))
	5 725 MHz ~ 5 850 MHz Band	5 745 MHz ~ 5 825 MHz (802.11a/n(HT20)/ac(VHT20))
		5 755 MHz ~ 5 795 MHz (802.11n(HT40)/ac(VHT40))
5 775 MHz (802.11ac(VHT80))		
MODULATION TYPE	Bluetooth LE	GFSK for 1 Mbps / 2 Mbps
	Bluetooth	GFSK for 1Mbps, $\pi/4$ -DQPSK for 2Mbps, 8-DPSK for 3Mbps
	WLAN 2.4 GHz	802.11b: DSSS Modulation(DBPSK/DQPSK/CCK)
		802.11g/n(HT20)/n(HT40): OFDM Modulation(BPSK/QPSK/16QAM/64QAM)
WLAN 5 GHz	802.11a/n(HT20)/n(HT40)/ac(VHT80): OFDM Modulation(BPSK/QPSK/16QAM/64QAM)	

RF OUTPUT POWER	Bluetooth LE	1 Mbps	11.06 dBm
		2 Mbps	11.07 dBm
	Bluetooth	1 Mbps	11.07 dBm
		2 Mbps	10.74 dBm
		3 Mbps	10.80 dBm
	WLAN 2.4 GHz	Antenna 0	18.09 dBm(802.11b)
			14.56 dBm(802.11g)
			14.34 dBm(802.11n_HT20)
			12.40 dBm(802.11n_HT40)
		Antenna 1	20.03 dBm(802.11b)
			14.26 dBm(802.11g)
14.14 dBm(802.11n_HT20)			
Multiple Antenna	12.20 dBm(802.11n_HT40)		
	17.42 dBm(802.11g)		
	17.25 dBm(802.11n_HT20)		
		15.31 dBm(802.11n_HT40)	

RF OUTPUT POWER	5 150 MHz ~ 5 250 MHz Band	Antenna 0	15.50 dBm(802.11a) 13.81 dBm(802.11n_HT20) 13.85 dBm(802.11n_HT40) 13.95 dBm(802.11ac_VHT80)
		Antenna 1	12.85 dBm(802.11a) 12.91 dBm(802.11n_HT20) 12.24 dBm(802.11n_HT40) 11.15 dBm(802.11ac_VHT80)
		Multiple Antenna	17.38 dBm(802.11a) 16.18 dBm(802.11n_HT20) 16.04 dBm(802.11n_HT40) 15.78 dBm(802.11ac_VHT80)
	5 250 MHz ~ 5 350 MHz Band	Antenna 0	14.95 dBm(802.11a) 12.94 dBm(802.11n_HT20) 13.25 dBm(802.11n_HT40) 12.46 dBm(802.11ac_VHT80)
		Antenna 1	12.96 dBm(802.11a) 12.68 dBm(802.11n_HT20) 11.37 dBm(802.11n_HT40) 10.71 dBm(802.11ac_VHT80)
		Multiple Antenna	17.08 dBm(802.11a) 15.71 dBm(802.11n_HT20) 15.42 dBm(802.11n_HT40) 14.68 dBm(802.11ac_VHT80)

RF OUTPUT POWER	5 470 MHz ~ 5 725 MHz Band	Antenna 0	14.54 dBm(802.11a) 11.51 dBm(802.11n_HT20) 12.40 dBm(802.11n_HT40) 10.77 dBm(802.11ac_VHT80)
		Antenna 0_Straddle	12.82 dBm(802.11a) 12.95 dBm(802.11n_HT20) 11.61 dBm(802.11n_HT40) 11.90 dBm(802.11ac_VHT80)
		Antenna 1	12.72 dBm(802.11a) 10.85 dBm(802.11n_HT20) 11.73 dBm(802.11n_HT40) 8.73 dBm(802.11ac_VHT80)
		Antenna 1_Straddle	14.04 dBm(802.11a) 14.11 dBm(802.11n_HT20) 13.53 dBm(802.11n_HT40) 12.55 dBm(802.11ac_VHT80)
		Multiple Antenna	16.65 dBm(802.11a) 14.06 dBm(802.11n_HT20) 15.09 dBm(802.11n_HT40) 12.88 dBm(802.11ac_VHT80)
		Multiple Antenna _Straddle	16.48 dBm(802.11a) 16.58 dBm(802.11n_HT20) 15.69 dBm(802.11n_HT40) 15.25 dBm(802.11ac_VHT80)

RF OUTPUT POWER	5 725 MHz ~ 5 850 MHz Band	Antenna 0	13.89 dBm(802.11a) 13.84 dBm(802.11n_HT20) 12.19 dBm(802.11n_HT40) 11.41 dBm(802.11ac_VHT80)
		Antenna 0_Straddle	5.28 dBm(802.11a) 5.39 dBm(802.11n_HT20) -0.48 dBm(802.11n_HT40) -2.93 dBm(802.11ac_VHT80)
		Antenna 1	13.35 dBm(802.11a) 14.23 dBm(802.11n_HT20) 11.53 dBm(802.11n_HT40) 10.94 dBm(802.11ac_VHT80)
		Antenna 1_Straddle	5.61 dBm(802.11a) 6.29 dBm(802.11n_HT20) 1.25 dBm(802.11n_HT40) -1.99 dBm(802.11ac_VHT80)
		Multiple Antenna	16.75 dBm(802.11a) 16.87 dBm(802.11n_HT20) 14.76 dBm(802.11n_HT40) 14.19 dBm(802.11ac_VHT80)
		Multiple Antenna _Straddle	8.46 dBm(802.11a) 8.87 dBm(802.11n_HT20) 3.48 dBm(802.11n_HT40) 0.58 dBm(802.11ac_VHT80)

ANTENNA TYPE	Chip Antenna			
ANTENNA GAIN	Bluetooth LE	-4.00 dBi		
	Bluetooth	-4.00 dBi		
	WLAN 2.4 GHz	Antenna 0	-1.54 dBi	
		Antenna 1	1.72 dBi	
		Multiple Antenna	3.40 dBi	
	5 150 MHz ~ 5 250 MHz Band	Antenna 0	-2.68 dBi	
		Antenna 1	-0.90 dBi	
		Multiple Antenna	1.31 dBi	
	5 250 MHz ~ 5 350 MHz Band	Antenna 0	-2.54 dBi	
		Antenna 1	-0.55 dBi	
		Multiple Antenna	1.58 dBi	
	5 470 MHz ~ 5 725 MHz Band	Antenna 0	-0.70 dBi	
		Antenna 1	-0.29 dBi	
		Multiple Antenna	2.52 dBi	
	5 725 MHz ~ 5 850 MHz Band	Antenna 0	-1.26 dBi	
		Antenna 1	-2.11 dBi	
		Multiple Antenna	1.35 dBi	
	List of each Osc. or crystal Freq.(Freq. >= 1 MHz)		40 MHz	

3.2 Alternative type(s)/model(s); also covered by this test report.

-. The following lists consist of the added model and their differences.

Model Name	Differences	Tested
WCA731M	Basic Model	<input checked="" type="checkbox"/>
WCA734M	The difference from the basic model is the removal of mic part.	<input checked="" type="checkbox"/>

Note: 1. Applicant consigns only basic model to test. Therefore this test report just guarantees the units, which have been tested.
 2. The Applicant/manufacturer is responsible for the compliance of all variants.

4. EUT MODIFICATIONS

-. None

5. SYSTEM TEST CONFIGURATION

5.1 Justification

This device was configured for testing in a typical way as a normal customer is supposed to be used. During the test, the following components were installed inside of the EUT.

DEVICE TYPE	MANUFACTURER	MODEL/PART NUMBER	FCC ID
Main Board	Samsung Electronics Co Ltd	WCA731M	N/A

5.2 Peripheral equipment

Defined as equipment needed for correct operation of the EUT, but not considered as tested:

Model	Manufacturer	Description	Connected to
WCA731M	Samsung Electronics Co Ltd	Wi-Fi/BT Transceiver (EUT)	
HP Probook	HP	Notebook PC	EUT
PPP009L-E	LIE-ON TECHNOLOGY (CHANGZHOU)CO.,LTD.	AC Adapter	

5.3 Mode of operation during the test

For the testing, software used to control the EUT for staying in continuous transmitting mode is programmed.

-. Frequency / Channel Operations

Channel	Frequency
1	2 412
2	2 417
3	2 422
4	2 427
5	2 432
6	2 437
7	2 442
8	2 447
9	2 452
10	2 457
11	2 462
12	2 467
13	2 472

Modulation	DATA RATE	OUTPUT POWER[dBm]	
		Antenna 0	Antenna 1
802.11 b (Middle Channel)	1 Mbps	18.09	19.42
	2 Mbps	18.02	19.38
	5.5 Mbps	17.96	19.37
	11 Mbps	17.90	19.30
802.11 g (Middle Channel)	6 Mbps	14.37	14.20
	9 Mbps	14.31	14.17
	12 Mbps	14.28	14.10
	18 Mbps	14.20	14.05
	24 Mbps	14.15	14.00
	36 Mbps	13.72	13.50
	48 Mbps	12.77	12.65
	54 Mbps	12.73	12.62
802.11 HT 20 (Middle Channel)	6.5 Mbps	14.30	13.80
	13 Mbps	14.22	13.70
	19.5 Mbps	14.15	13.65
	26 Mbps	14.10	13.62
	39 Mbps	13.65	13.09
	52 Mbps	13.61	13.07
	58.5 Mbps	12.71	12.28
	65 Mbps	12.65	12.20
802.11 HT 40 (Middle Channel)	13.5 Mbps	12.40	12.20
	27 Mbps	12.31	12.14
	40.5 Mbps	12.24	12.09
	54 Mbps	12.19	12.07
	81 Mbps	11.77	11.36
	108 Mbps	11.72	11.30
	121.5 Mbps	10.77	10.25
	135 Mbps	10.75	10.21

- The worse case data rate for each modulation is determined 1 Mbps(Ant.0/Ant.1) for IEEE 802.11b, 6 Mbps(Ant.0/Ant.1) for IEEE 802.11 g, 6.5 Mbps(Ant.0/Ant.1) for HT20, 13.5 Mbps(Ant.0/Ant.1) for HT40.
- To get a maximum emission levels from the EUT, the EUT was moved throughout the XY, XZ, and YZ planes and the worst case is “XY” axis.


- Duty Cycle

Mode	Tx On Time [ms]	Tx Off Time [ms]	Duty Cycle [%]	Correction Factor [dB]
802.11 b_Antenna 0	-	-	100.00	-
802.11 g_Antenna 0	-	-	100.00	-
802.11 HT 20_Antenna 0	-	-	100.00	-
802.11 HT 40_Antenna 0	-	-	100.00	-
802.11 b_Antenna 1	-	-	100.00	-
802.11 g_Antenna 1	-	-	100.00	-
802.11 HT 20_Antenna 1	-	-	100.00	-
802.11 HT 40_Antenna 1	-	-	100.00	-


Note – Duty Cycle : $(Tx\ On\ Time / (Tx\ On\ Time + Tx\ Off\ Time)) * 100$

Correction Factor : $10 * \log(1 / (Duty\ Cycle / 100))$


-. Test Plot

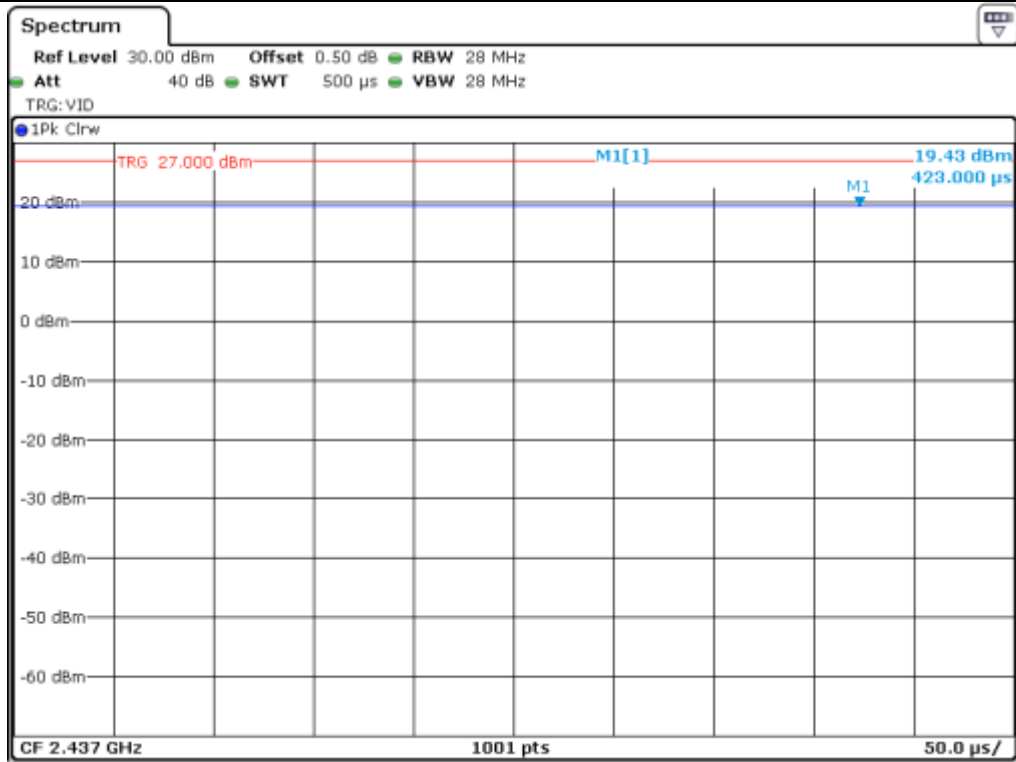


802.11 b_Antenna 0

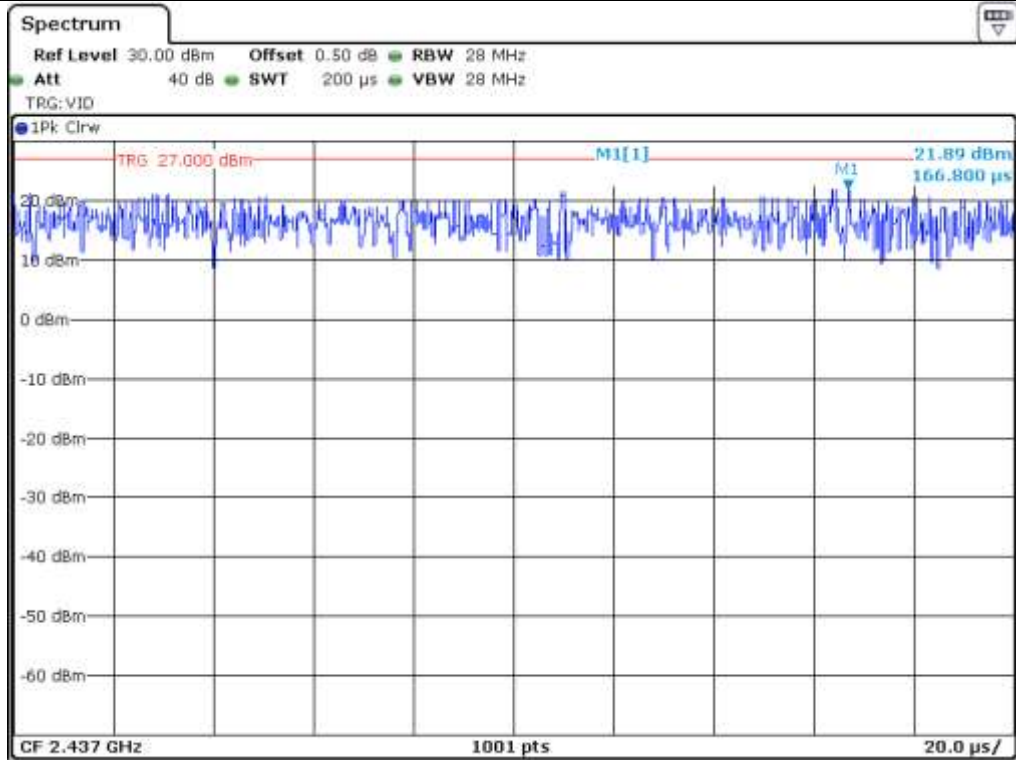


802.11 g_Antenna 0

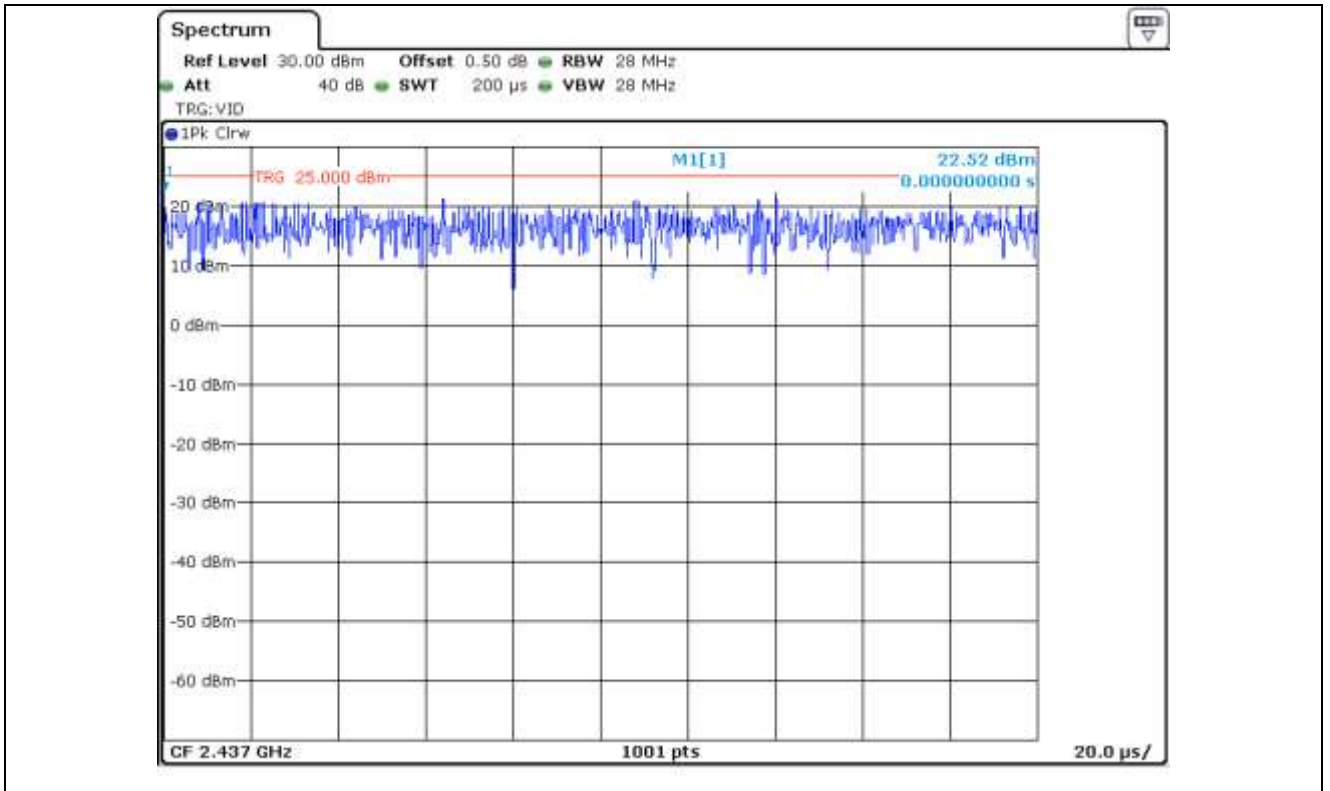


802.11 HT 20_Antenna 0

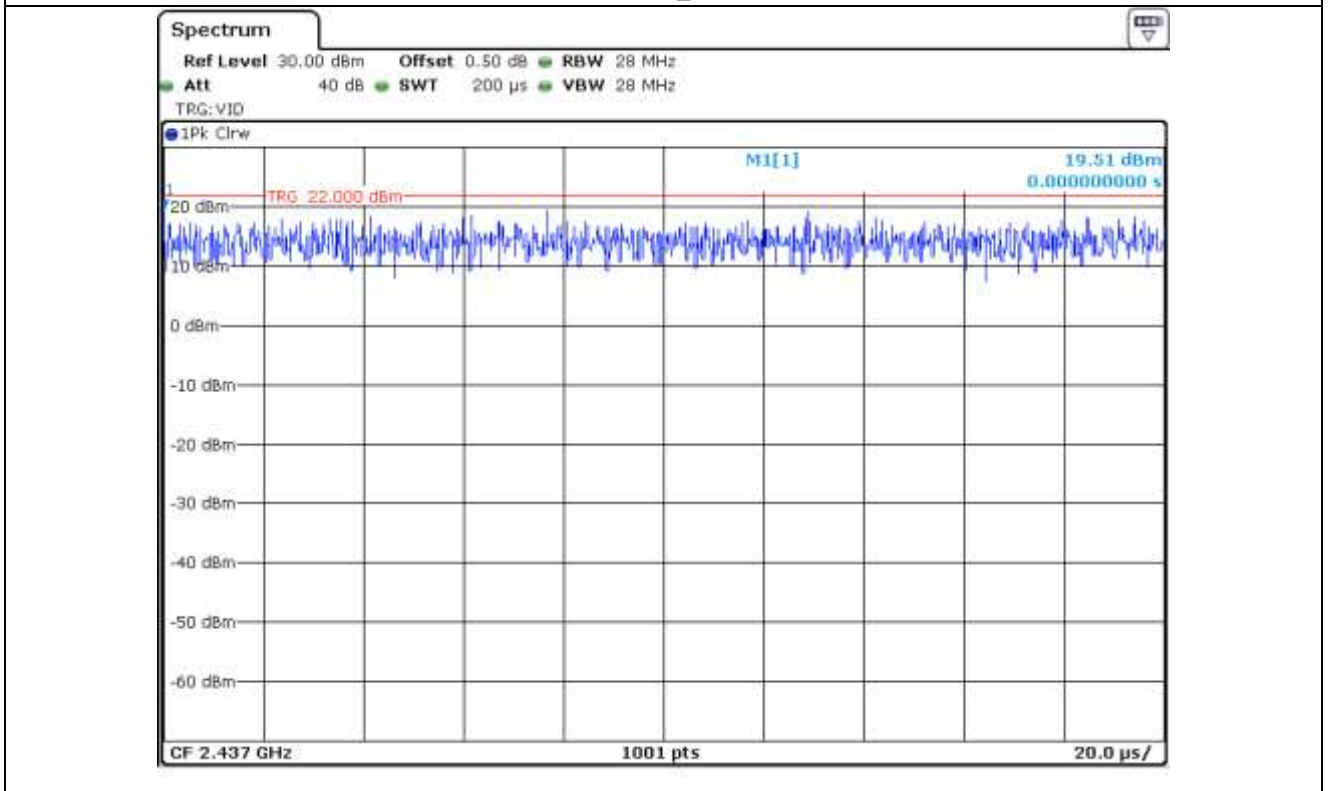


802.11 HT 40_Antenna 0

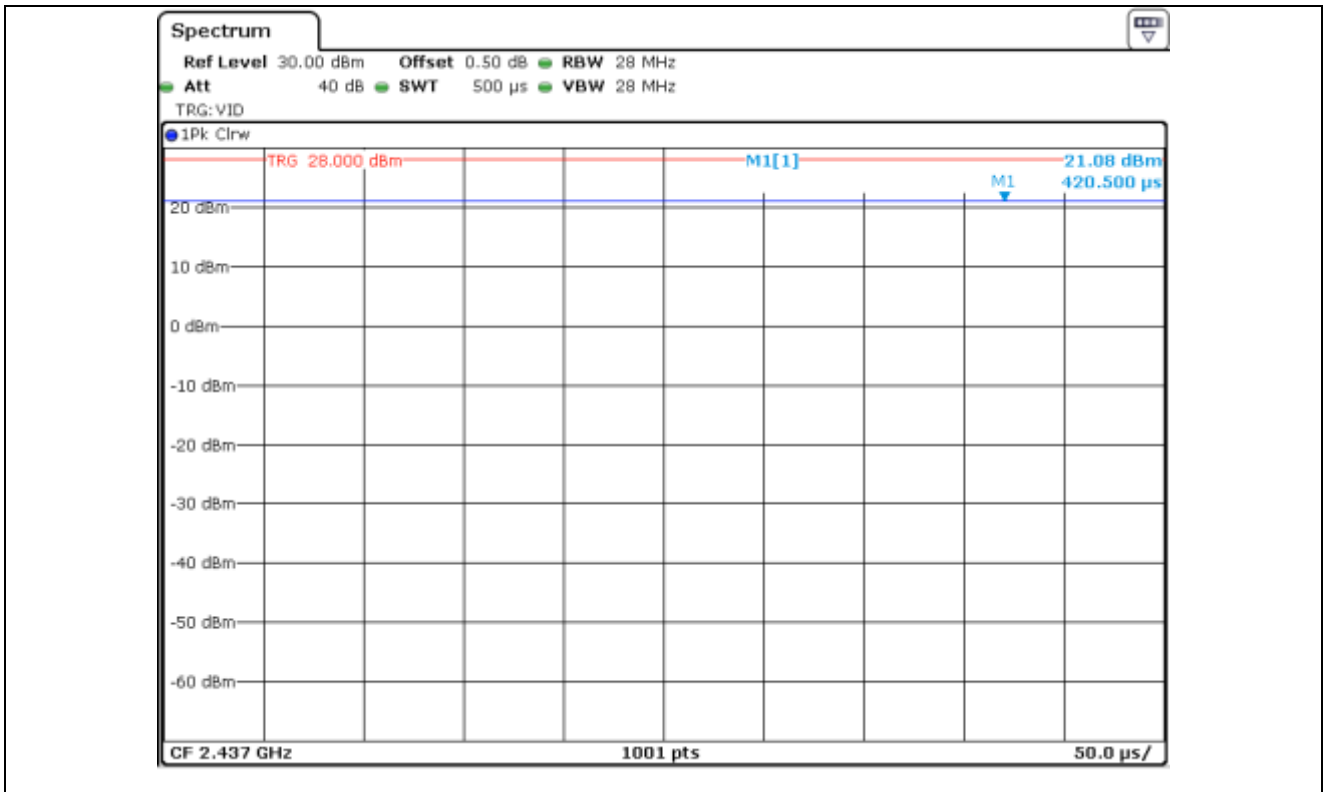


802.11 b_Antenna 1

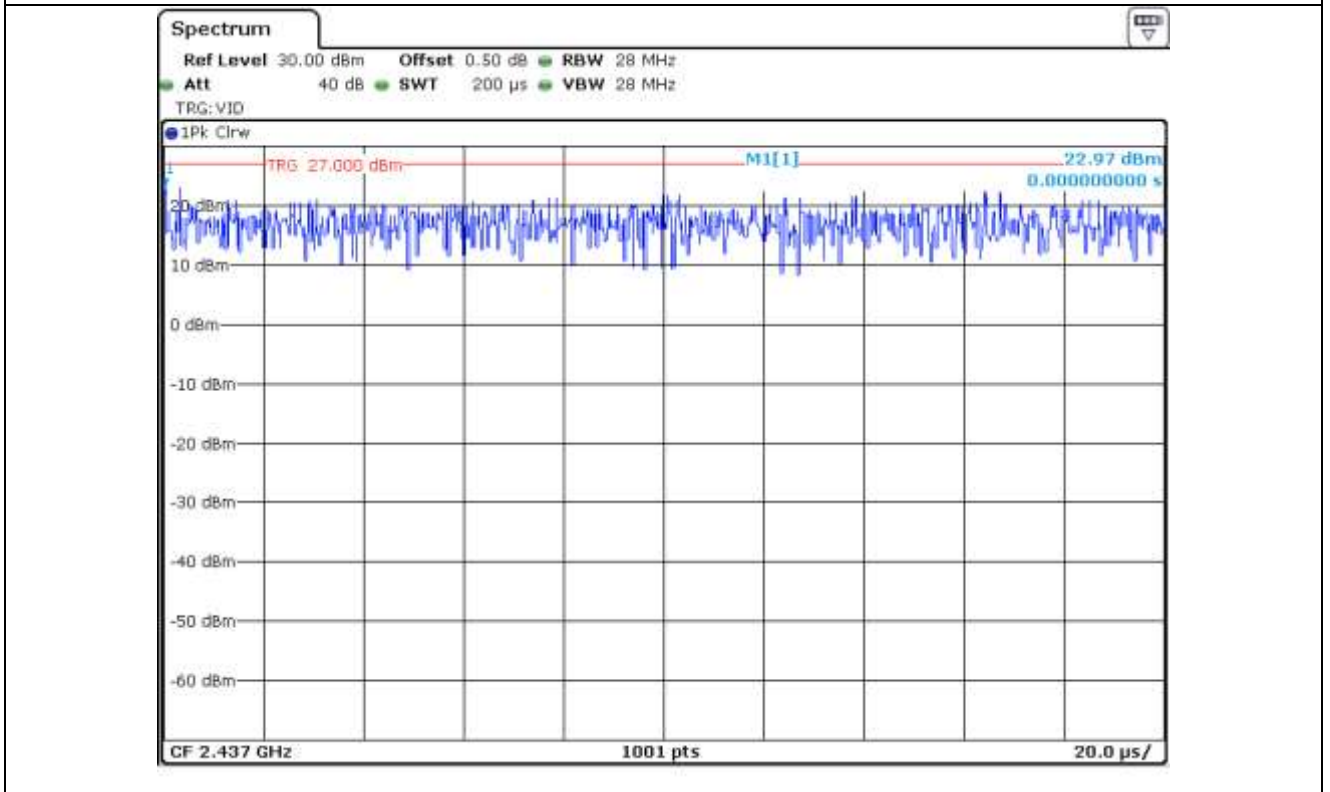

802.11 g_Antenna 1

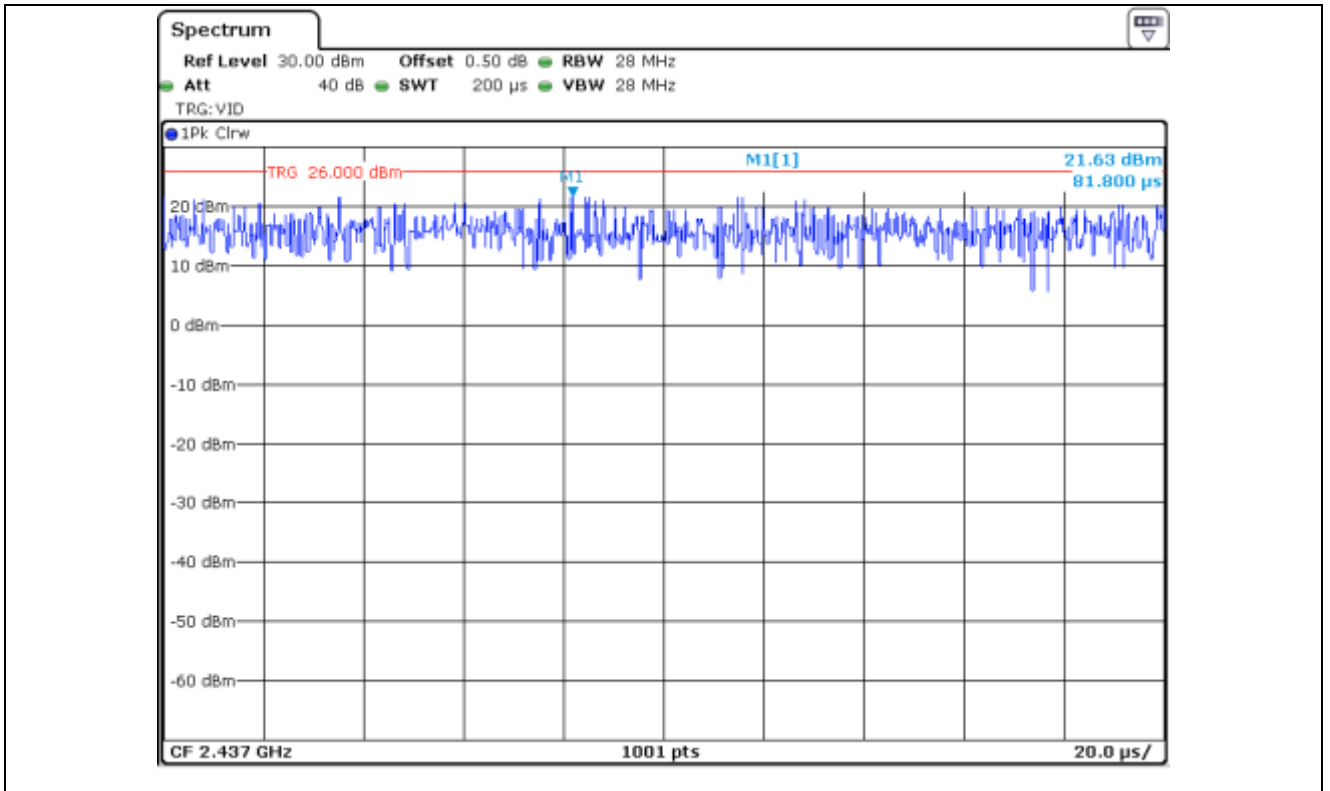

802.11 HT 20_Antenna 1

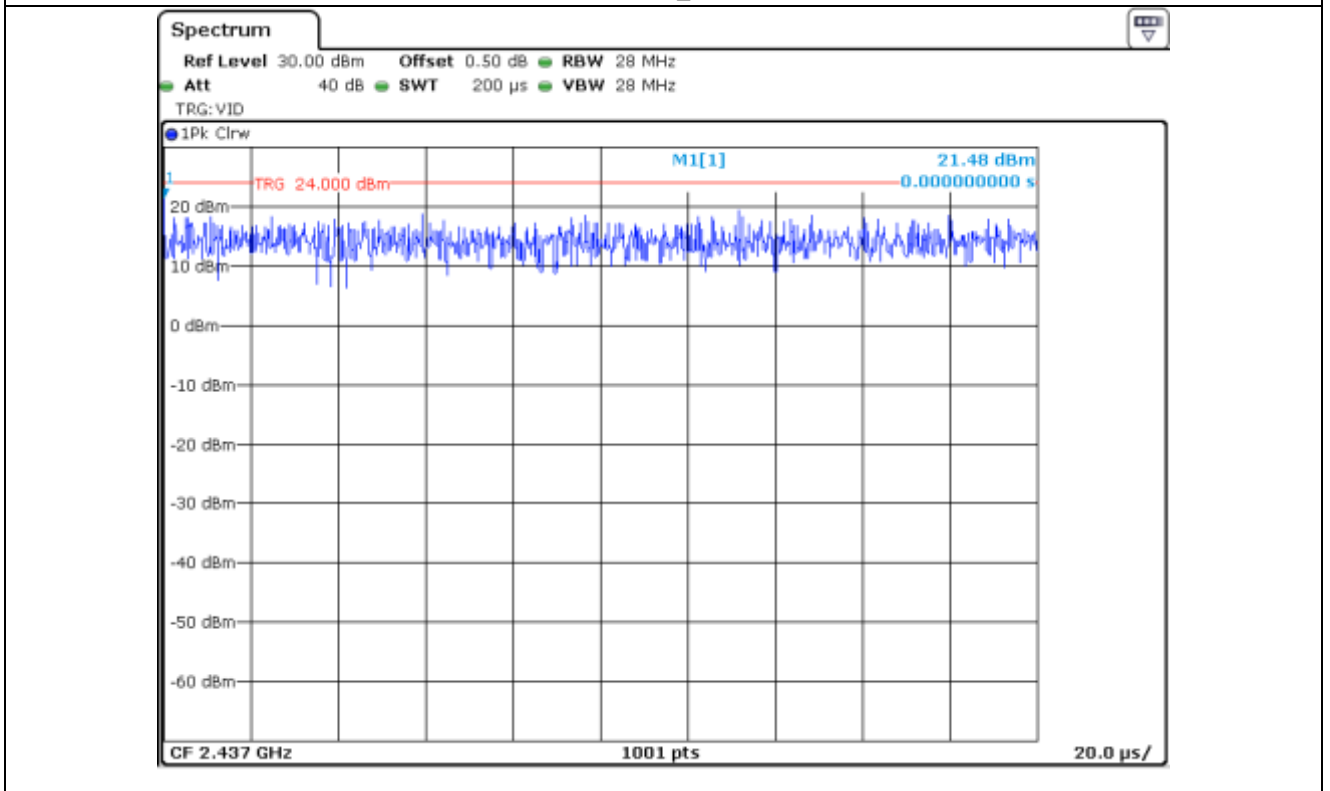

802.11 HT 40_Antenna 1

5.4 Configuration of Test System

Line Conducted Test: The EUT was connected to USB and the power of USB was connected to Notebook PC. All supporting equipments were connected to another LISN. Preliminary Power line Conducted Emission test was performed by using the procedure in ANSI C63.10: 2013 to determine the worse operating conditions.

Radiated Emission Test: Preliminary radiated emissions test were conducted using the procedure in ANSI C63.10: 2013 to determine the worse operating conditions. Final radiated emission tests were conducted at 3 meter Semi Anechoic Chamber.

The turntable was rotated through 360 degrees and the EUT was tested by positioned three orthogonal planes to obtain the highest reading on the field strength meter. Once maximum reading was determined, the search antenna was raised and lowered in both vertical and horizontal polarization.

5.5 Antenna Requirement

For intentional device, according to section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Antenna Construction:

The antenna of the EUT is Chip Antenna on the main board in the EUT, so no consideration of replacement by the user.

6. PRELIMINARY TEST

6.1 AC Power line Conducted Emissions Tests

During Preliminary Test, the following operating mode was investigated.

Operation Mode	The Worse operating condition (Please check one only)
Transmitting Mode	X

6.2 General Radiated Emissions Tests

During Preliminary Test, the following operating mode was investigated.

Operation Mode	The Worse operating condition (Please check one only)
Transmitting Mode	X


7. MIMIMUM 6 dB BANDWIDTH

7.1 Operating environment

Temperature : 23 °C
 Relative humidity : 41 % R.H.

7.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz, and peak detection was used. The 6 dB bandwidth is defined as the total spectrum over which the power is higher than the peak power minus 6 dB.

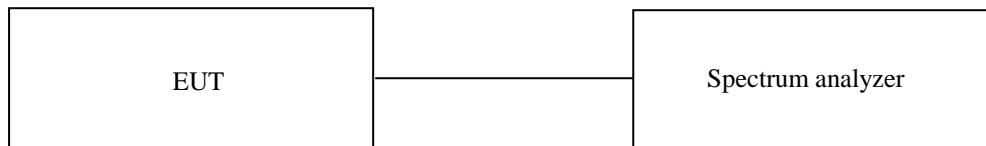

7.3 Test Date

August 21, 2020 ~ September 08, 2020


7.4 Test data for 802.11b WLAN Mode

7.4.1 Test data for Antenna 0


-. Test Result : Pass

CHANNEL	FREQUENCY (MHz)	6 dB Bandwidth (MHz)	LIMIT (MHz)	Margin (MHz)
Low	2 412.00	9.04	0.50	8.54
Middle	2 437.00	9.04	0.50	8.54
High 11	2 462.00	9.04	0.50	8.54
High 12	2 467.00	9.04	0.50	8.54
High 13	2 472.00	9.04	0.50	8.54


Remark. Margin = Measured Value - Limit

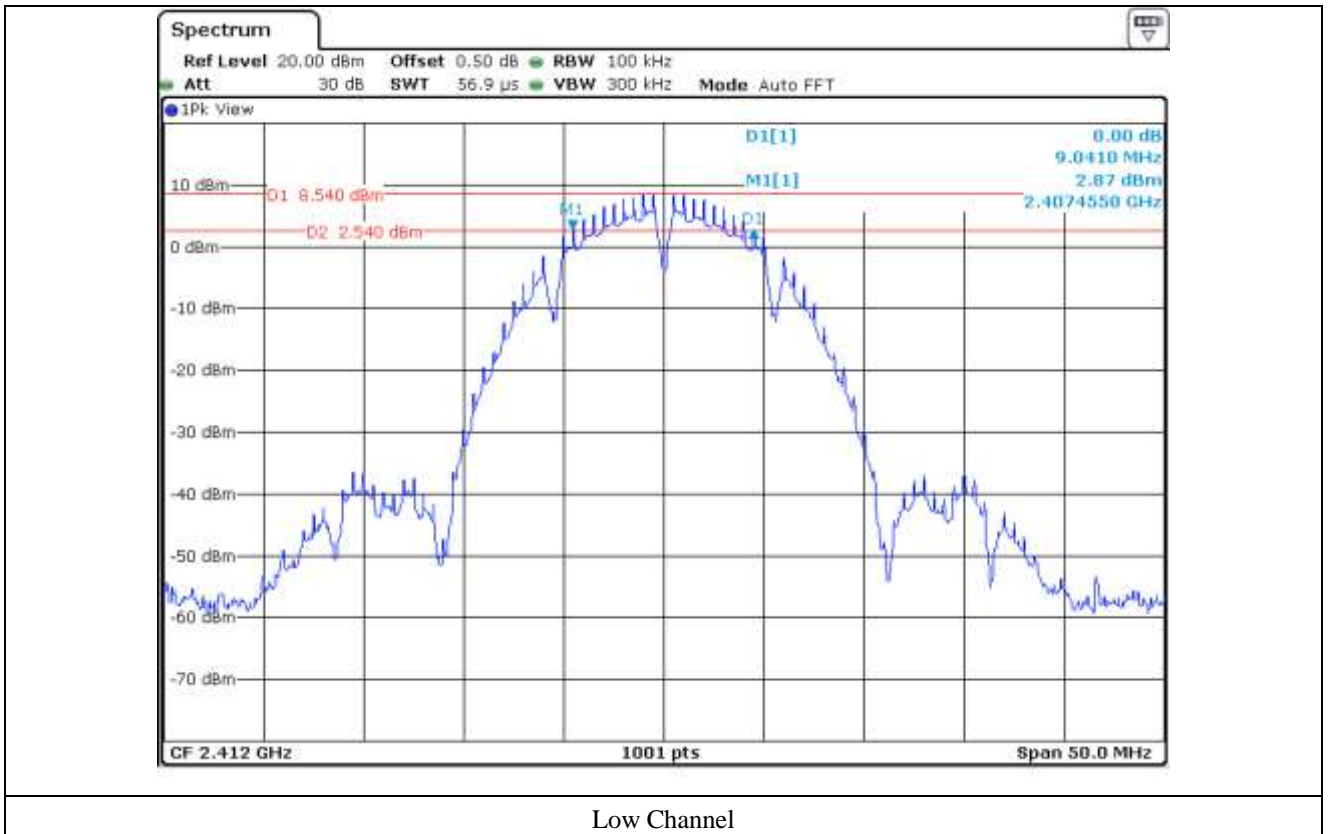


Low Channel

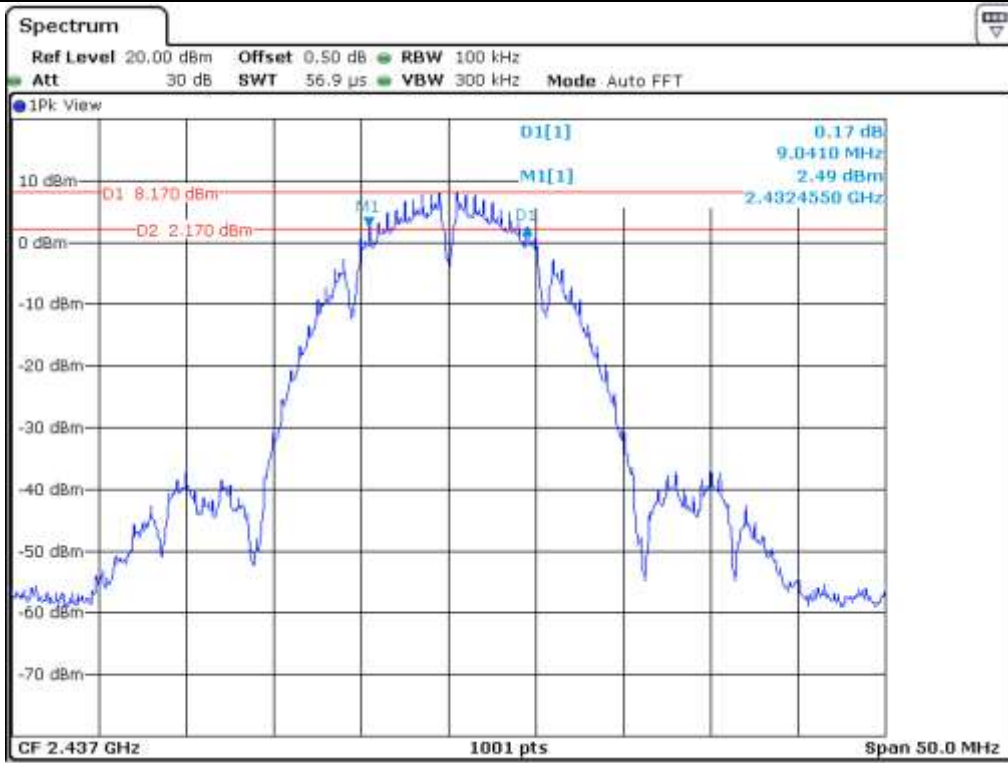


Middle Channel

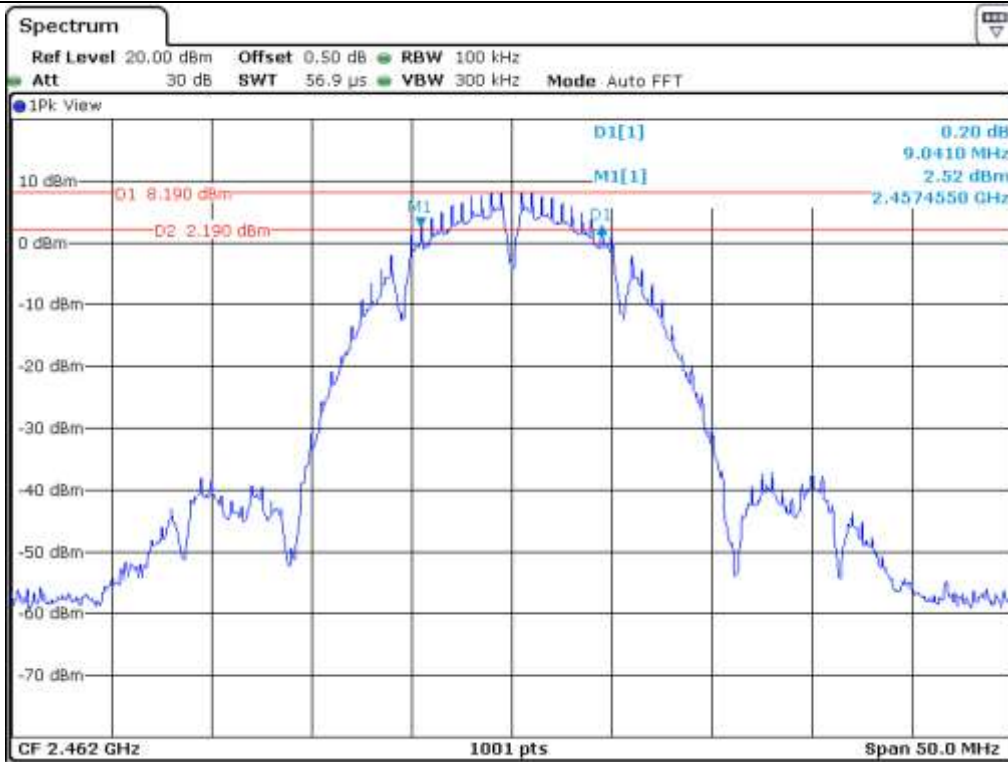

High Channel 11

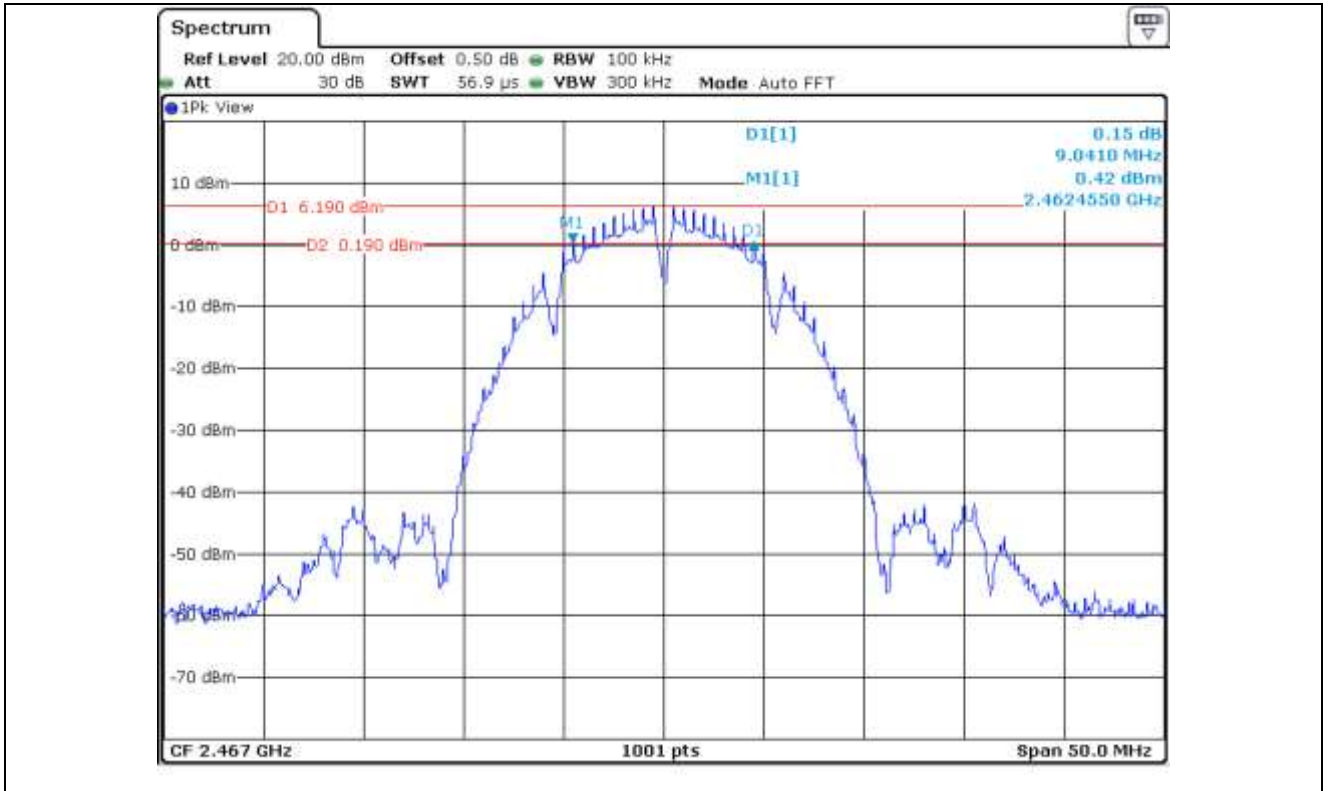

High Channel 12

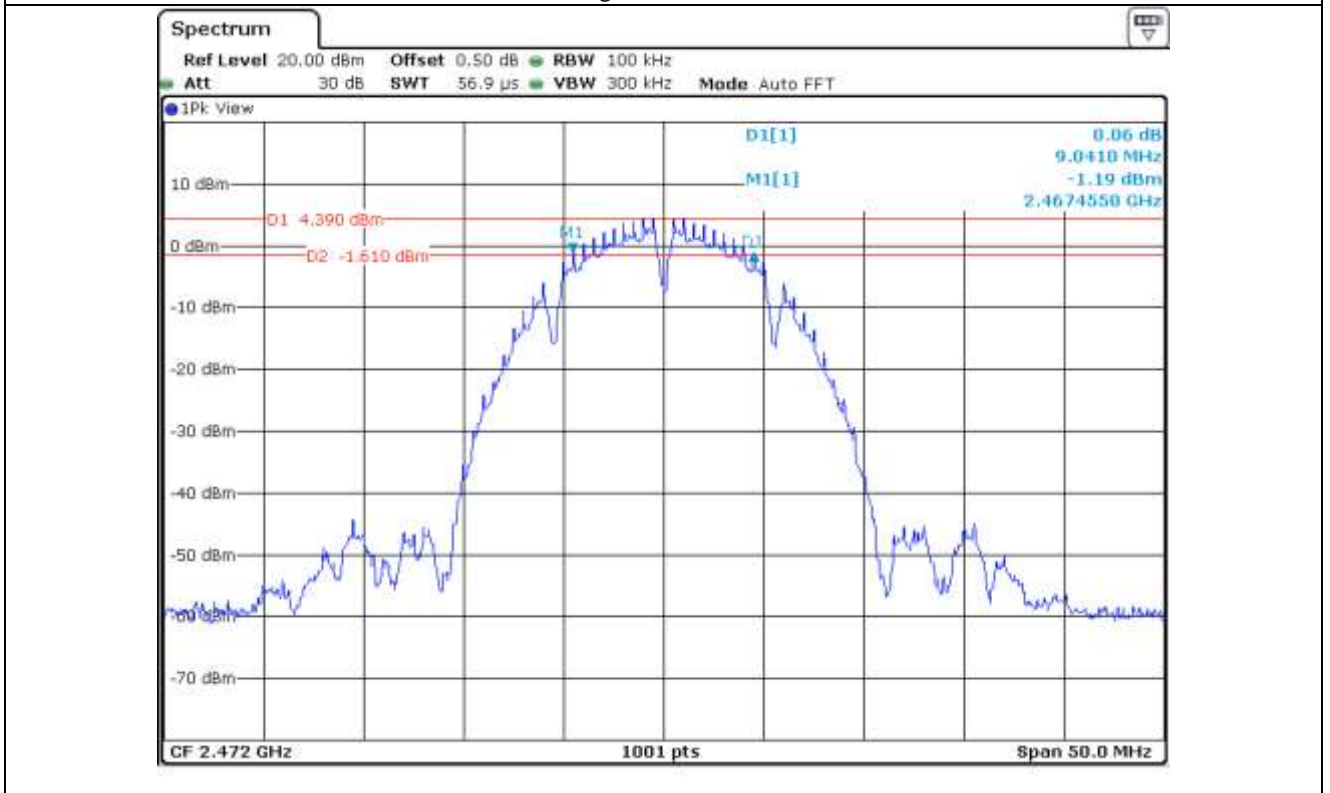


High Channel 13


7.4.2 Test data for Antenna 1

- Test Result : Pass

CHANNEL	FREQUENCY (MHz)	6 dB Bandwidth (MHz)	LIMIT (MHz)	Margin (MHz)
Low	2 412.00	9.04	0.50	8.54
Middle	2 437.00	9.04	0.50	8.54
High 11	2 462.00	9.04	0.50	8.54
High 12	2 467.00	9.04	0.50	8.54
High 13	2 472.00	9.04	0.50	8.54

Remark. Margin = Measured Value - Limit

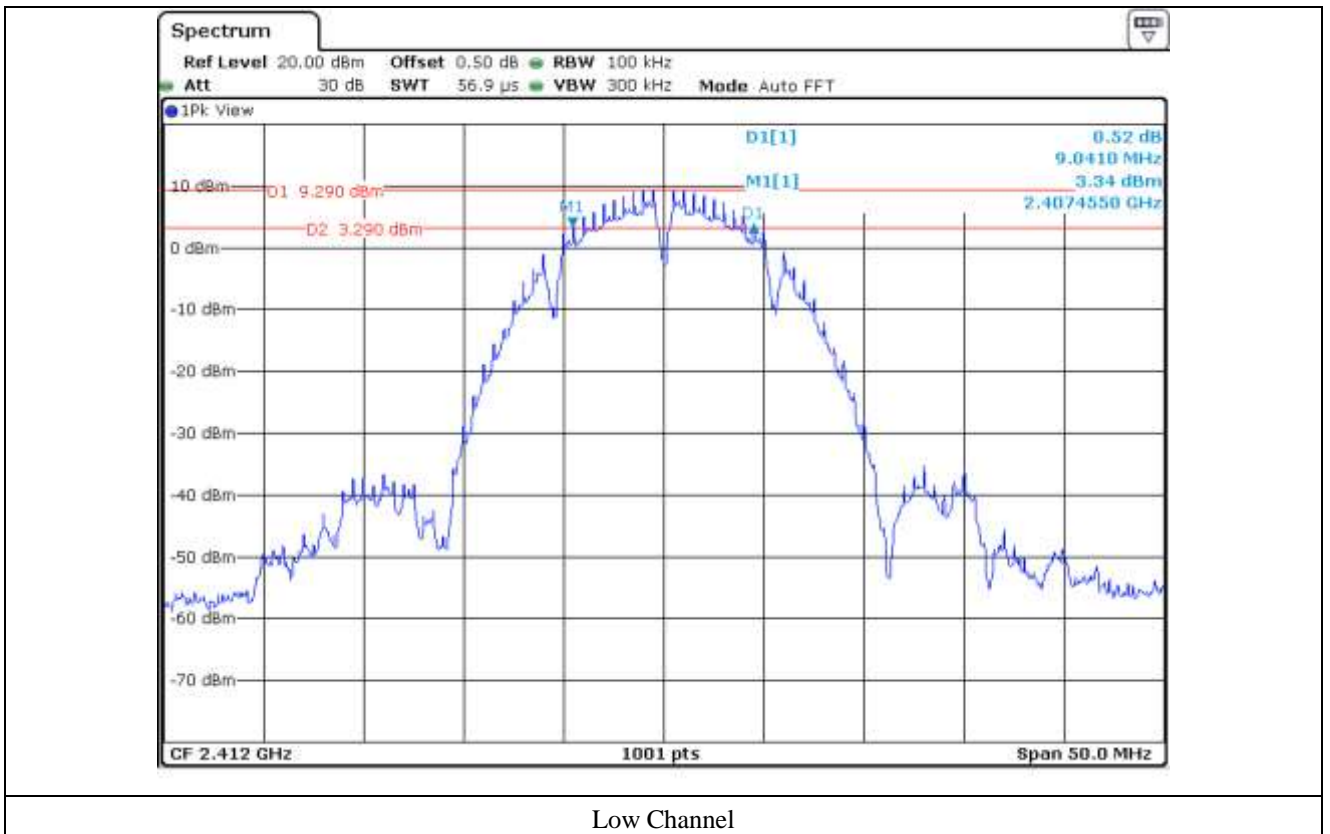


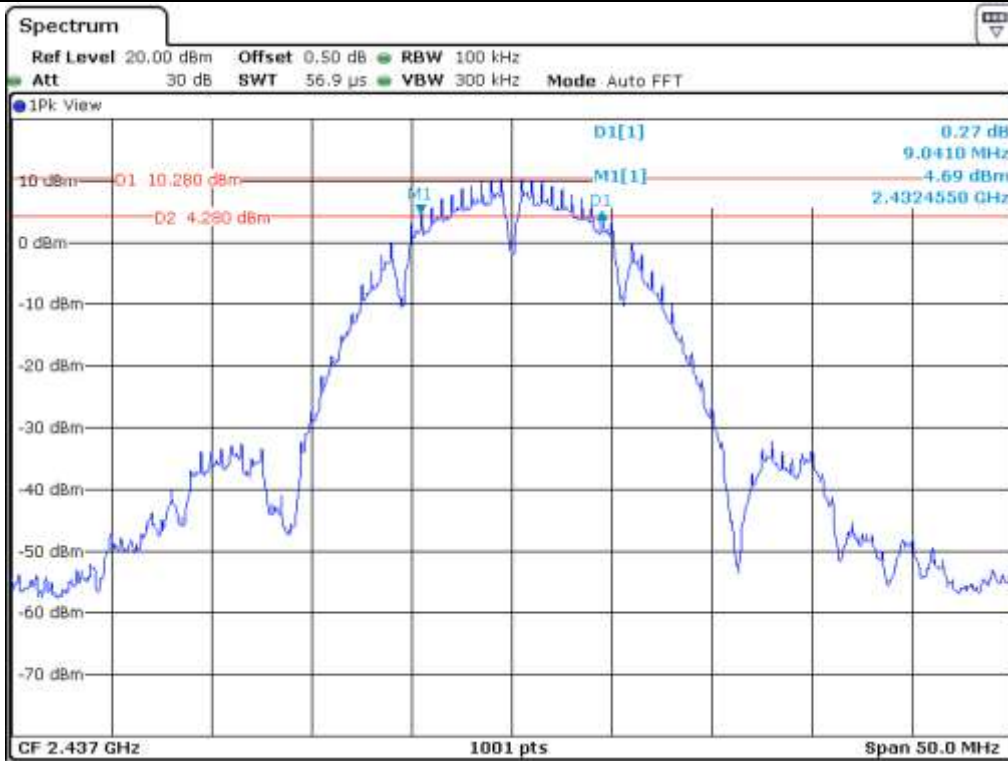


Middle Channel



High Channel 11

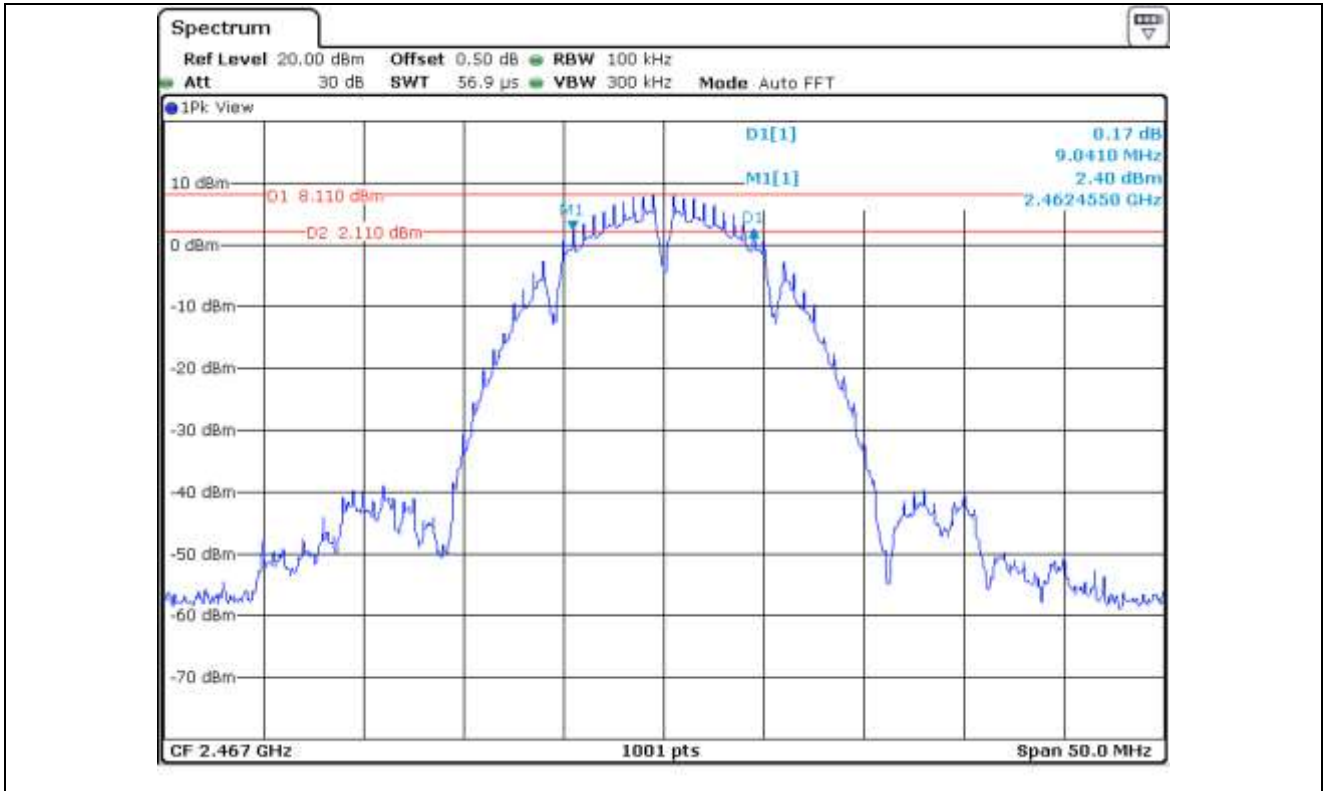

High Channel 12

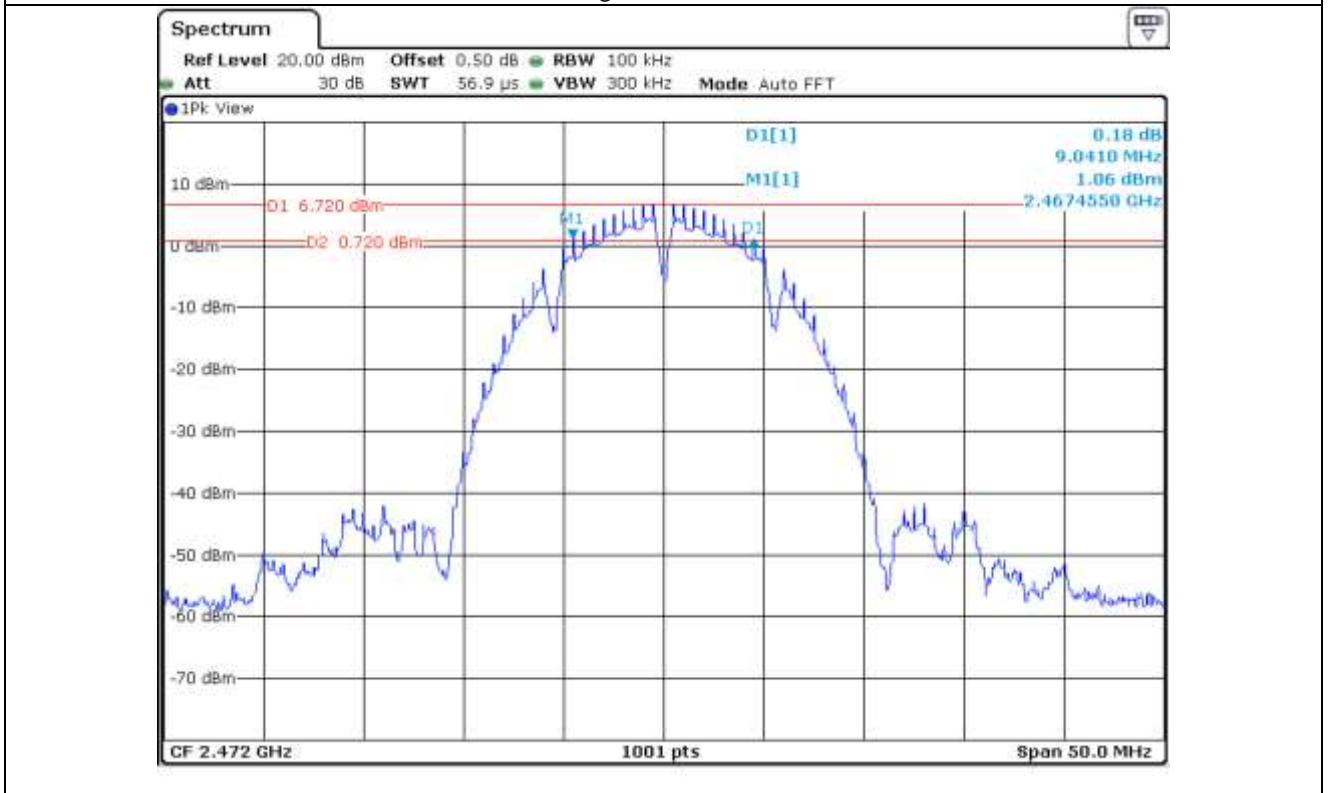

High Channel 13


7.5 Test data for 802.11g WLAN Mode

7.5.1 Test data for Antenna 0


-. Test Result : Pass

CHANNEL	FREQUENCY (MHz)	6 dB Bandwidth (MHz)	LIMIT (MHz)	Margin (MHz)
Low	2 412.00	16.08	0.50	15.58
Middle	2 437.00	16.33	0.50	15.83
High 11	2 462.00	16.33	0.50	15.83
High 12	2 467.00	16.33	0.50	15.83
High 13	2 472.00	16.33	0.50	15.83


Remark. Margin = Measured Value - Limit

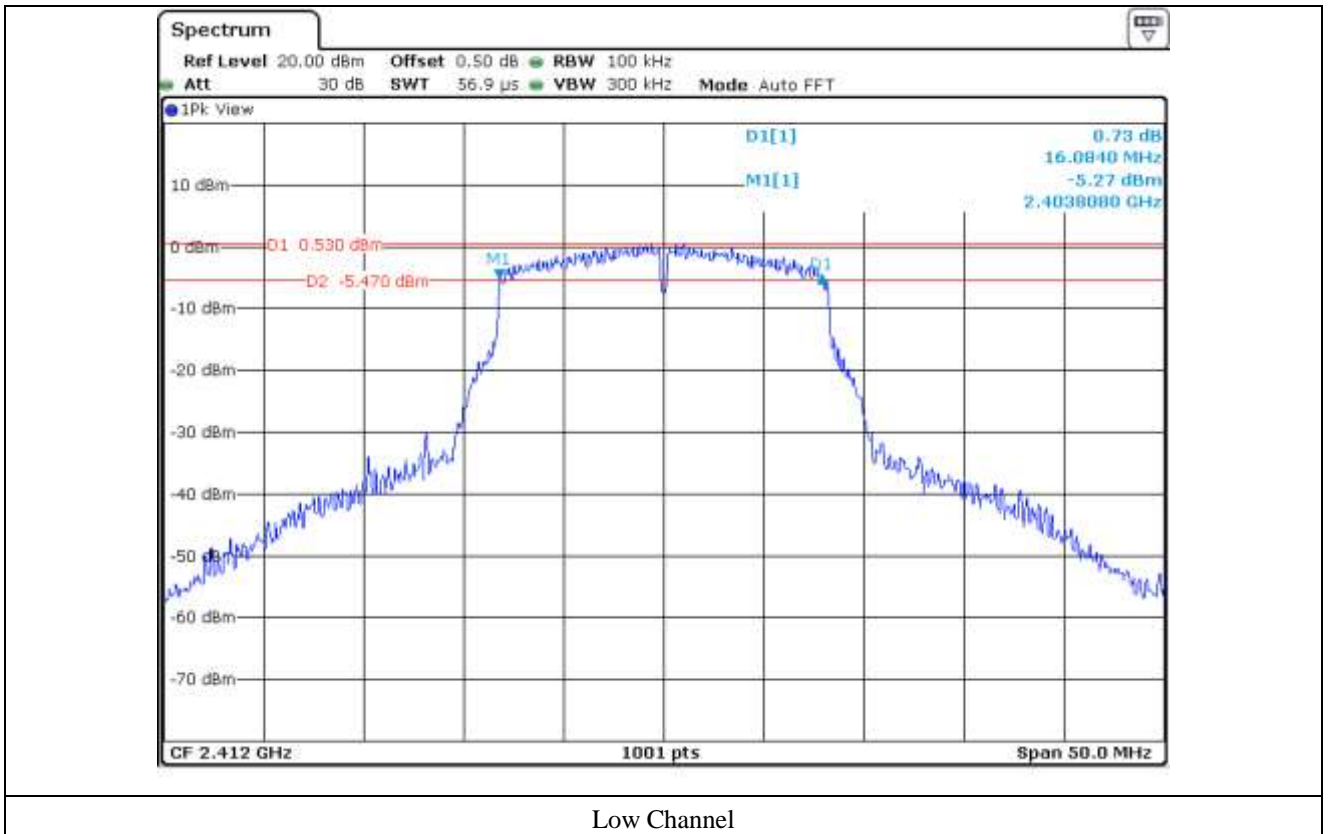


Low Channel

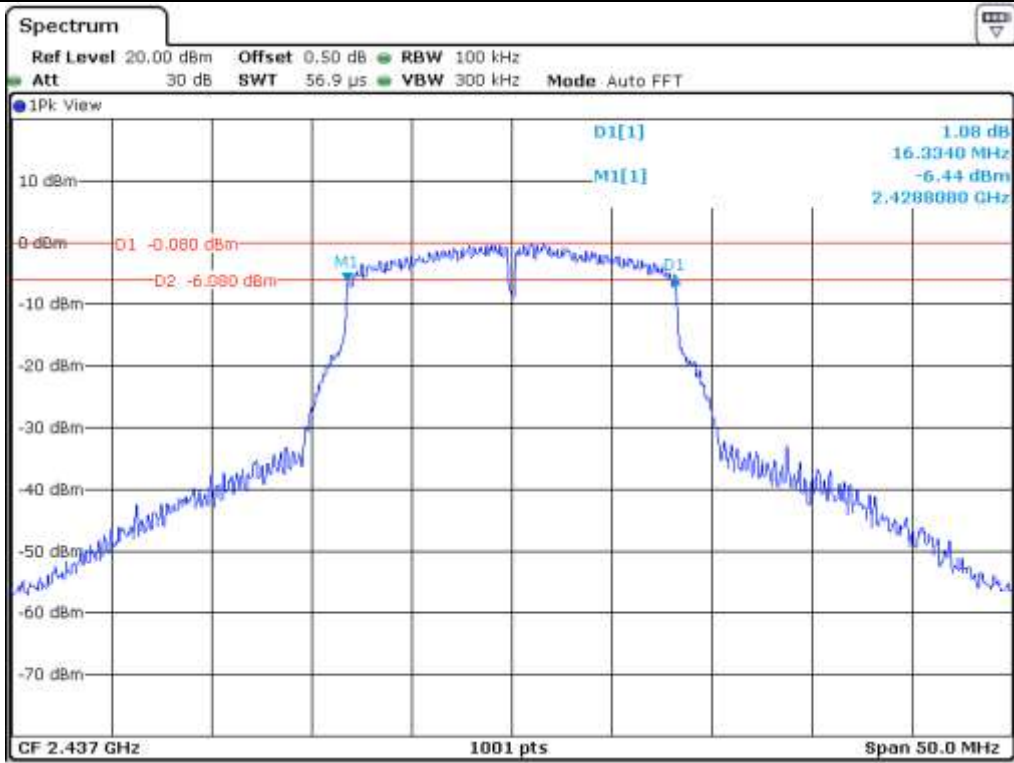


Middle Channel

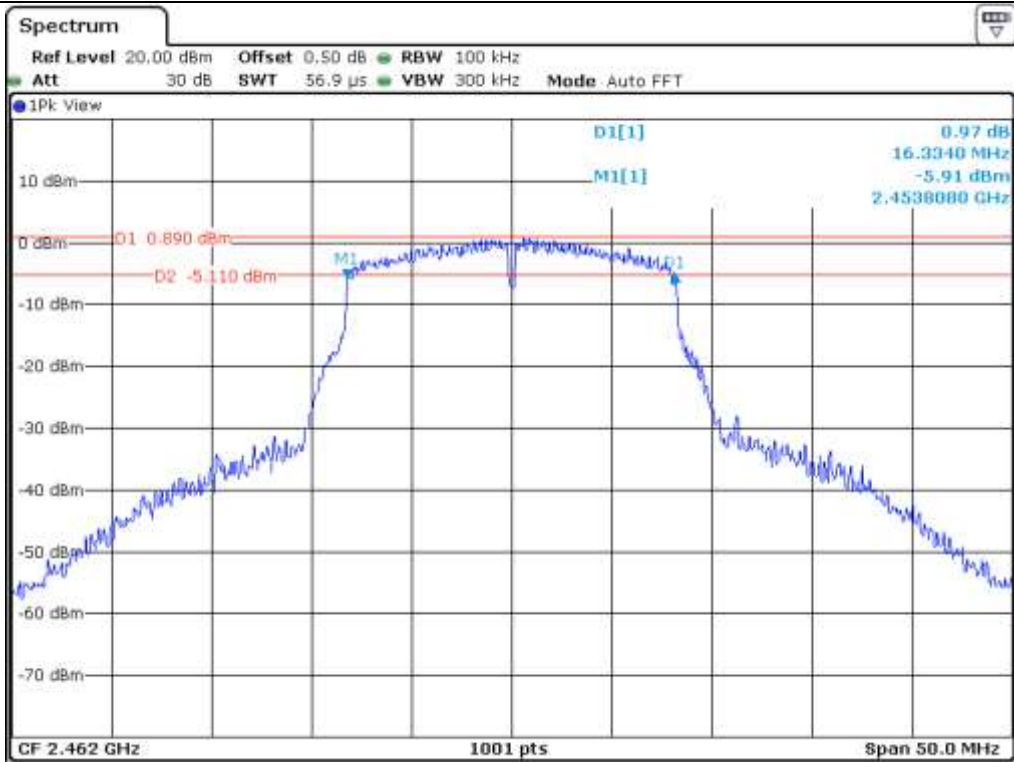

High Channel 11

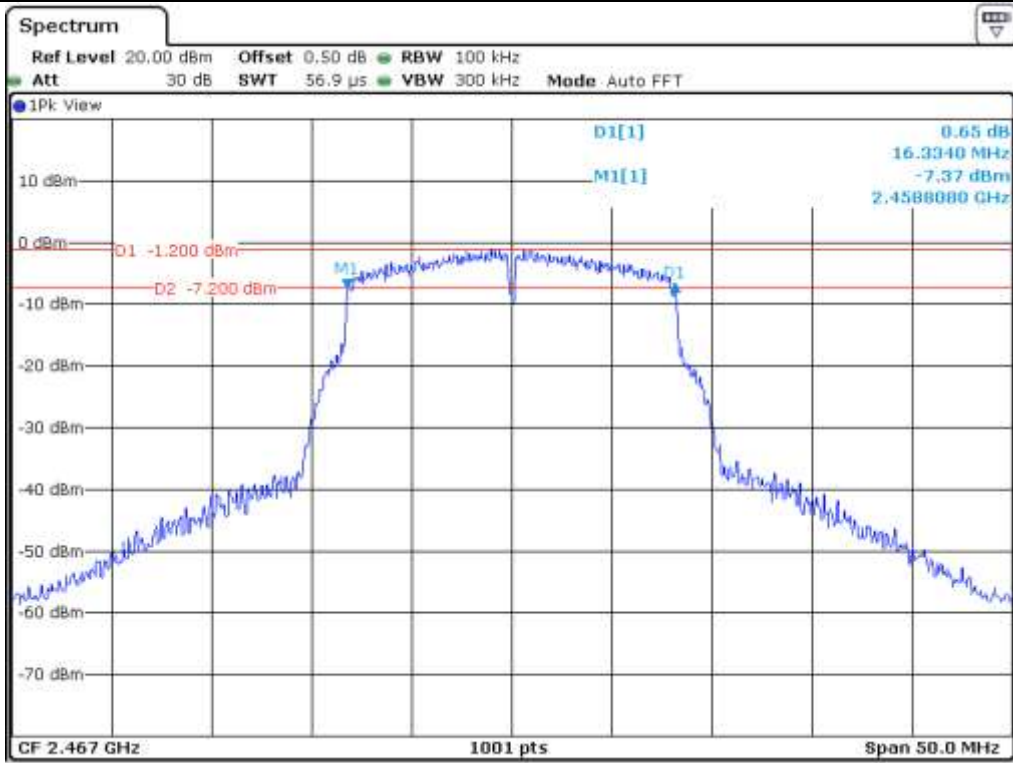

High Channel 12

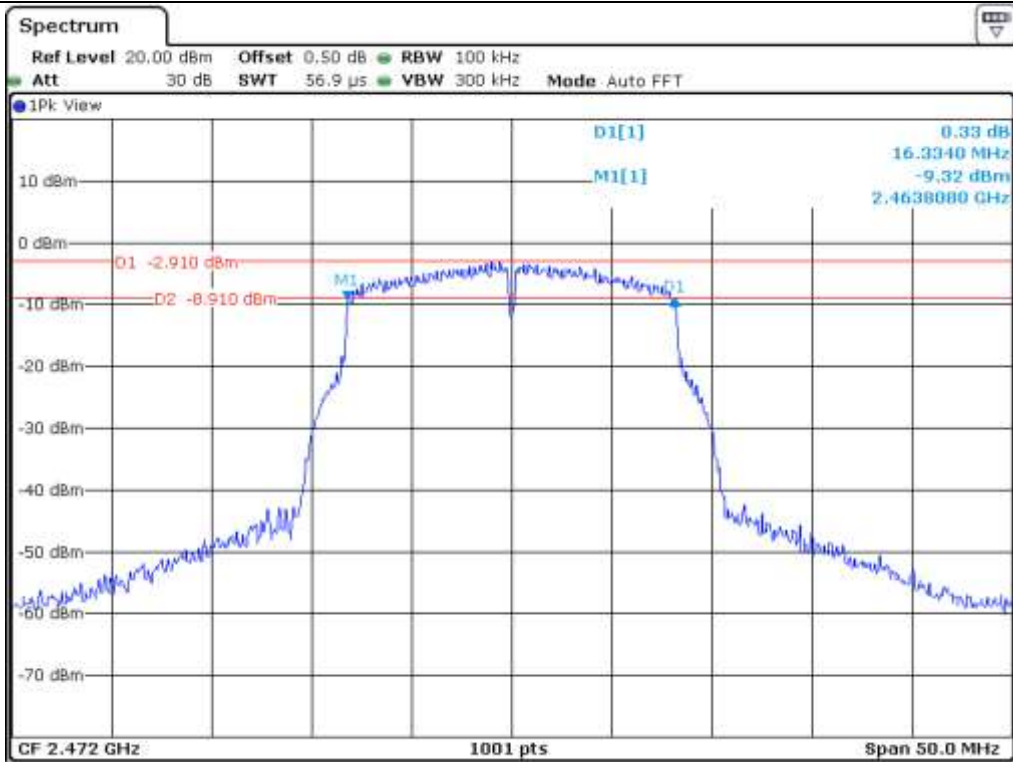


High Channel 13


7.5.2 Test data for Antenna 1

-. Test Result : Pass


CHANNEL	FREQUENCY (MHz)	6 dB Bandwidth (MHz)	LIMIT (MHz)	Margin (MHz)
Low	2 412.00	16.28	0.50	15.78
Middle	2 437.00	16.28	0.50	15.78
High 11	2 462.00	16.33	0.50	15.83
High 12	2 467.00	16.33	0.50	15.83
High 13	2 472.00	16.28	0.50	15.78

Remark. Margin = Measured Value – Limit

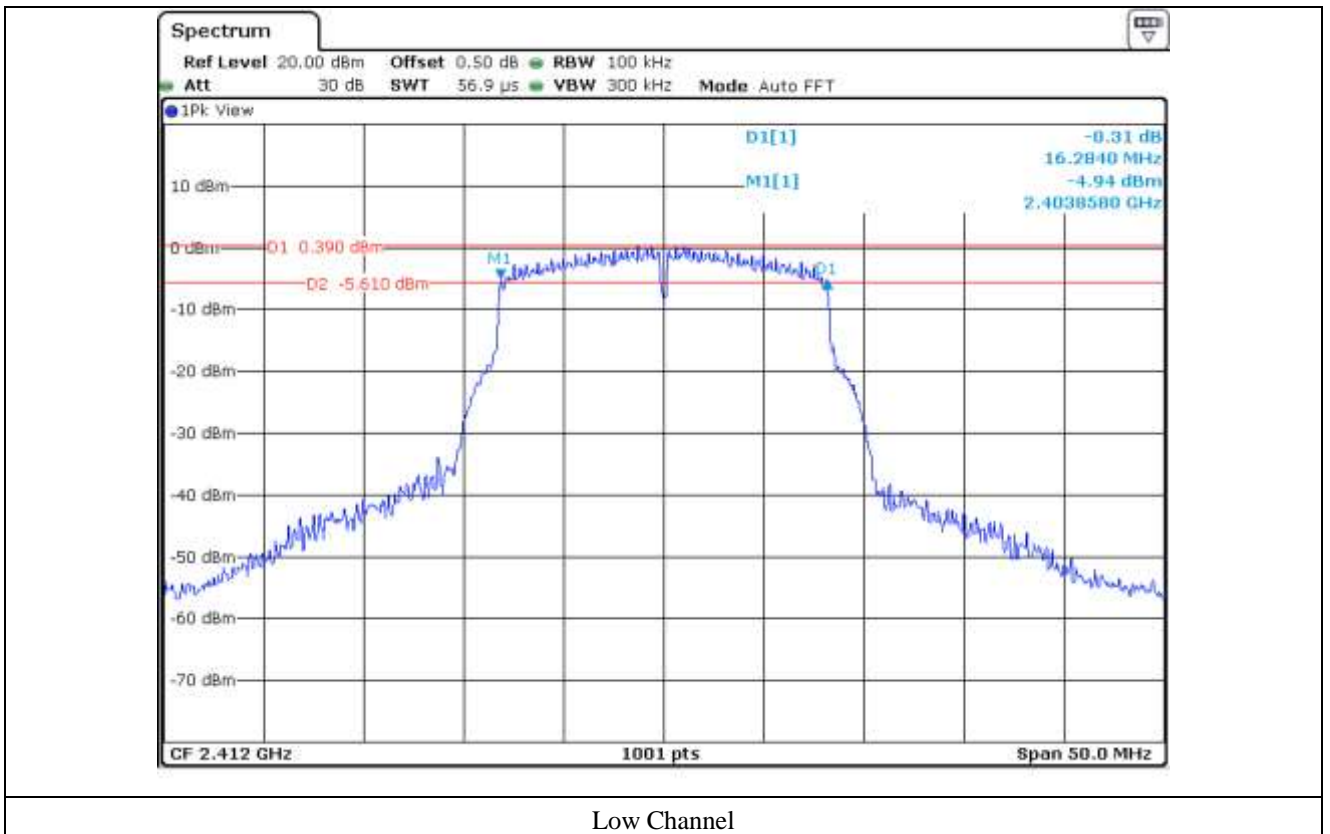


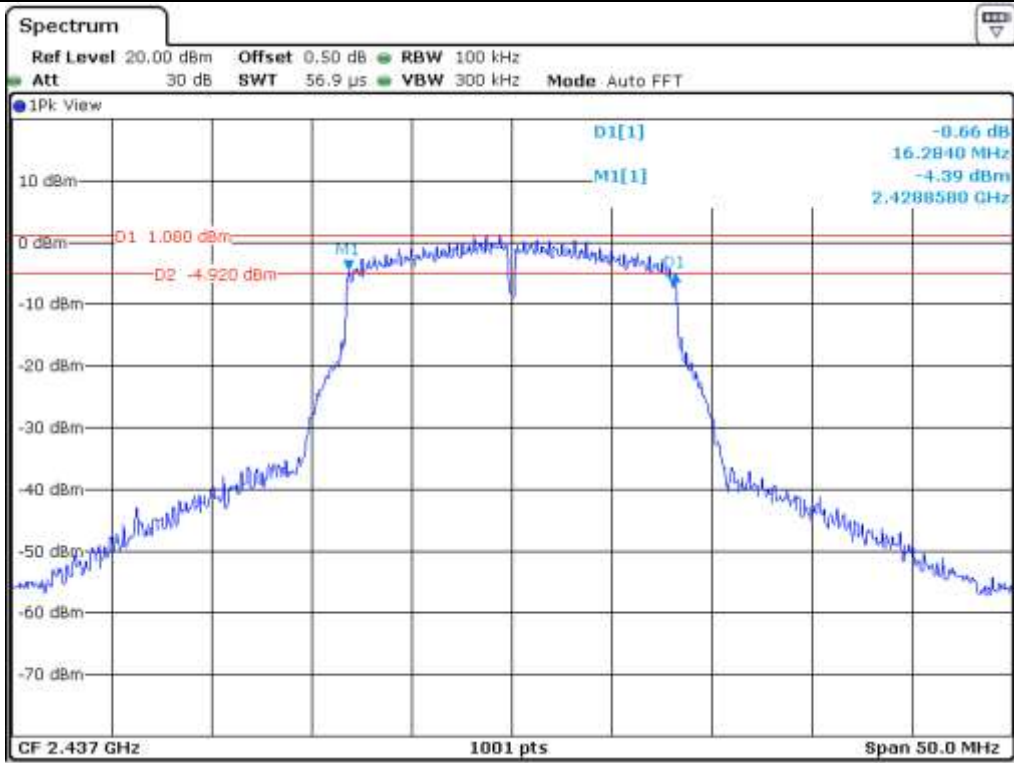


Middle Channel

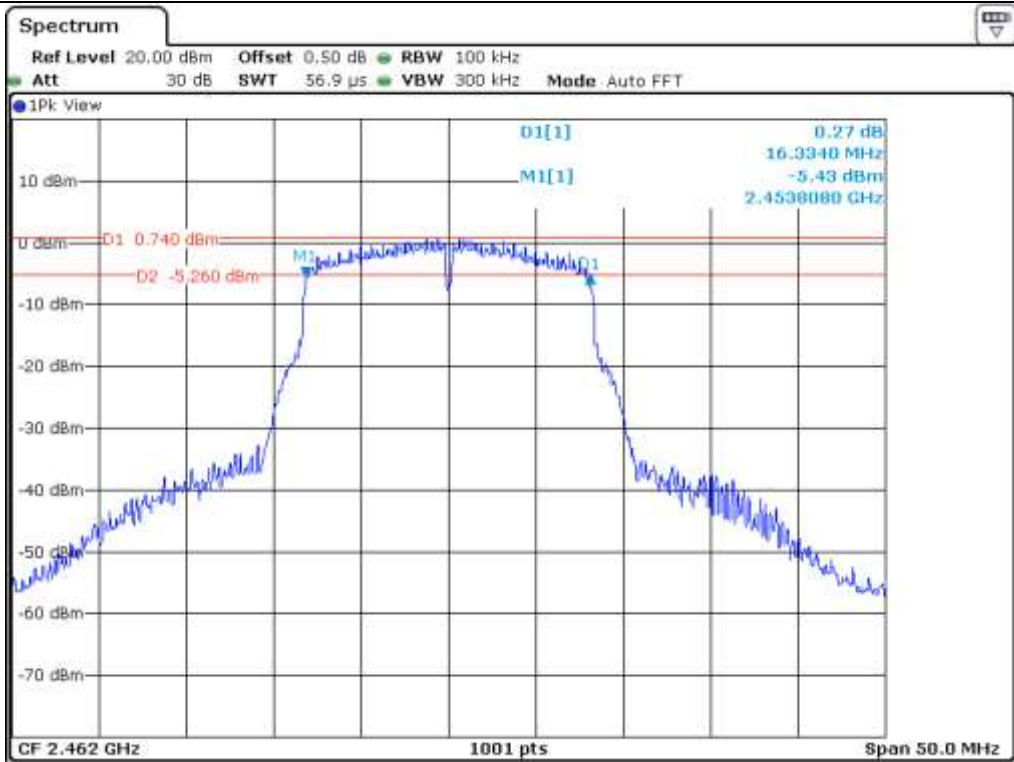

High Channel 11

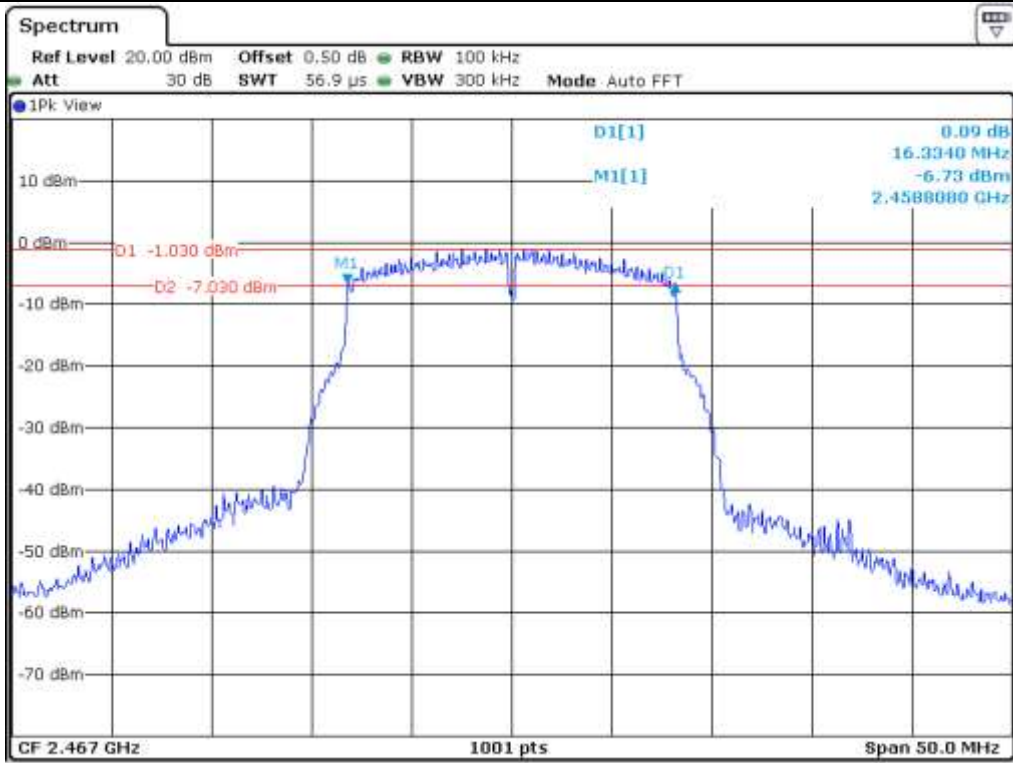

High Channel 12

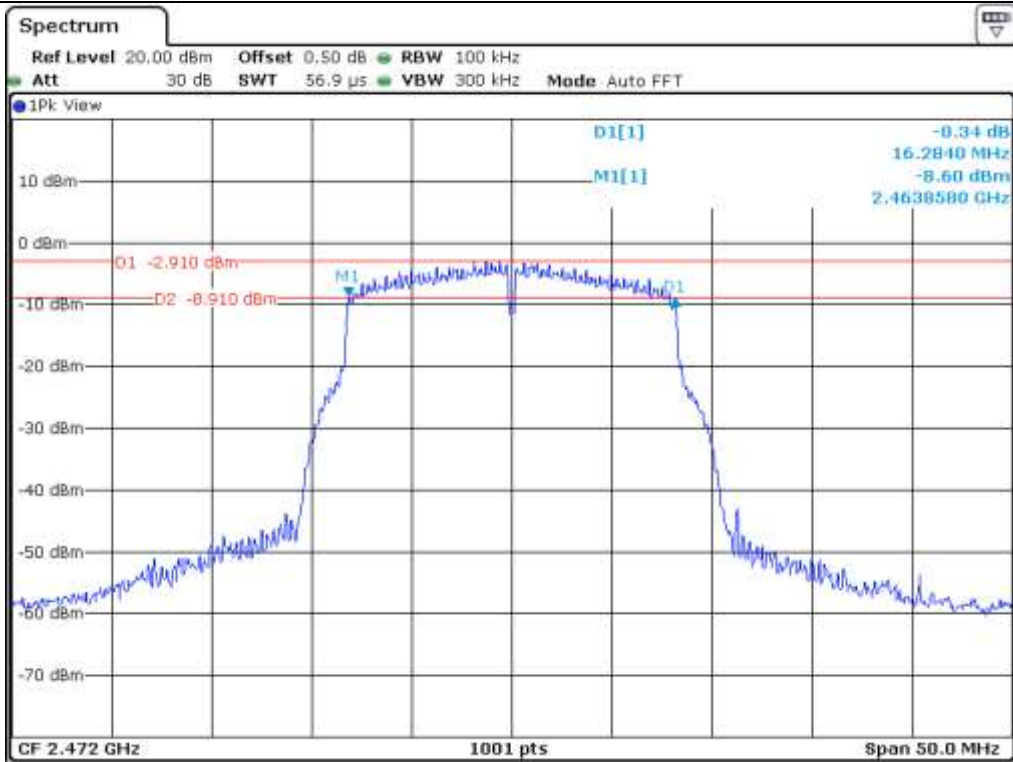

High Channel 13


7.6 Test data for 802.11n_HT20 WLAN Mode

7.6.1 Test data for Antenna 0


-. Test Result : Pass

CHANNEL	FREQUENCY (MHz)	6 dB Bandwidth (MHz)	LIMIT (MHz)	Margin (MHz)
Low	2 412.00	17.58	0.50	17.08
Middle	2 437.00	17.53	0.50	17.03
High 11	2 462.00	17.58	0.50	17.08
High 12	2 467.00	17.58	0.50	17.08
High 13	2 472.00	17.53	0.50	17.03


Remark. Margin = Measured Value - Limit

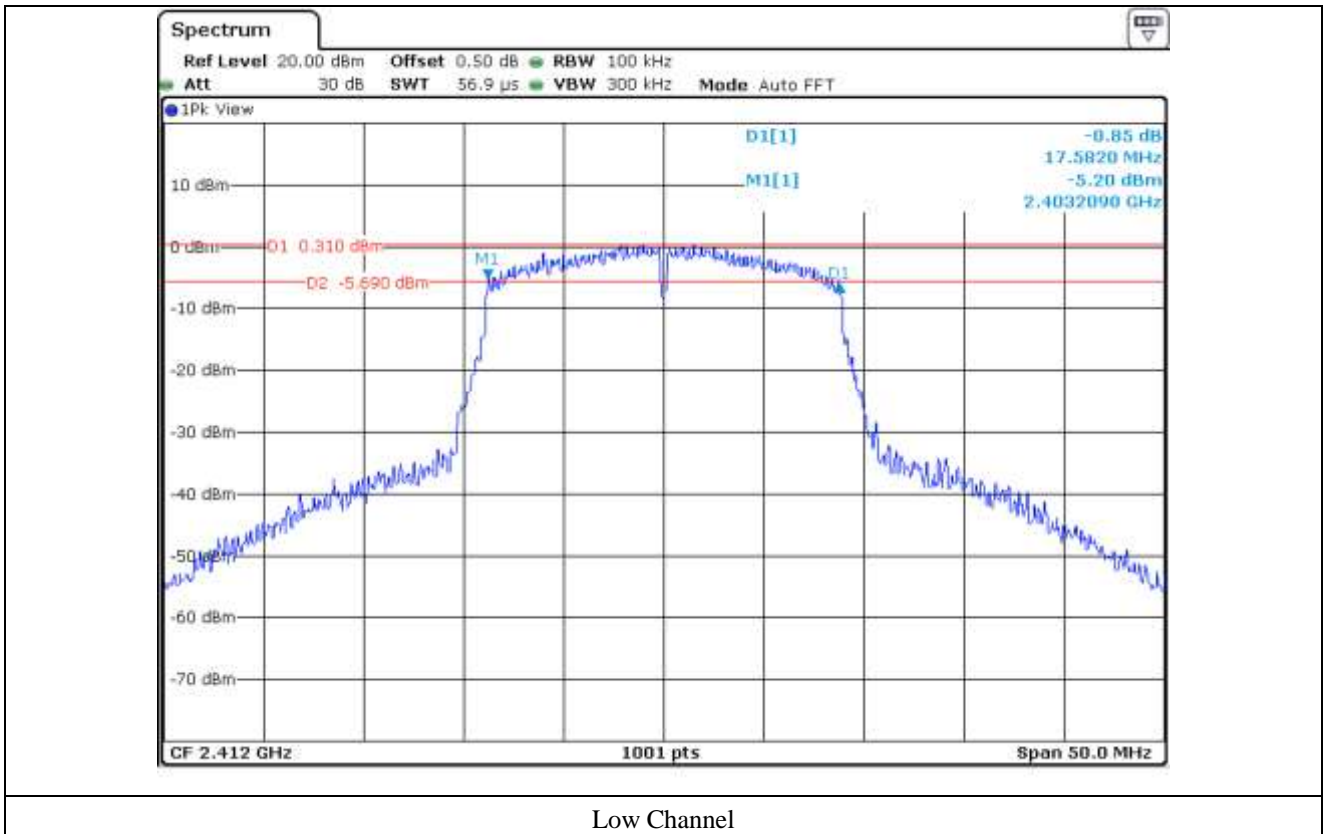


Low Channel

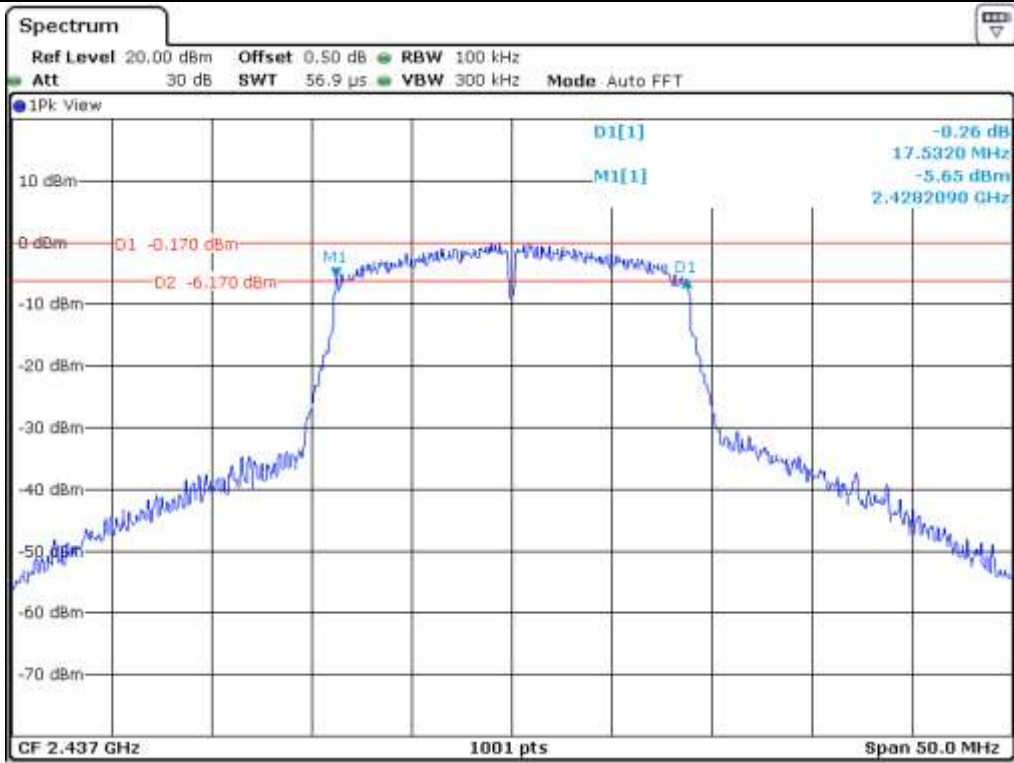


Middle Channel

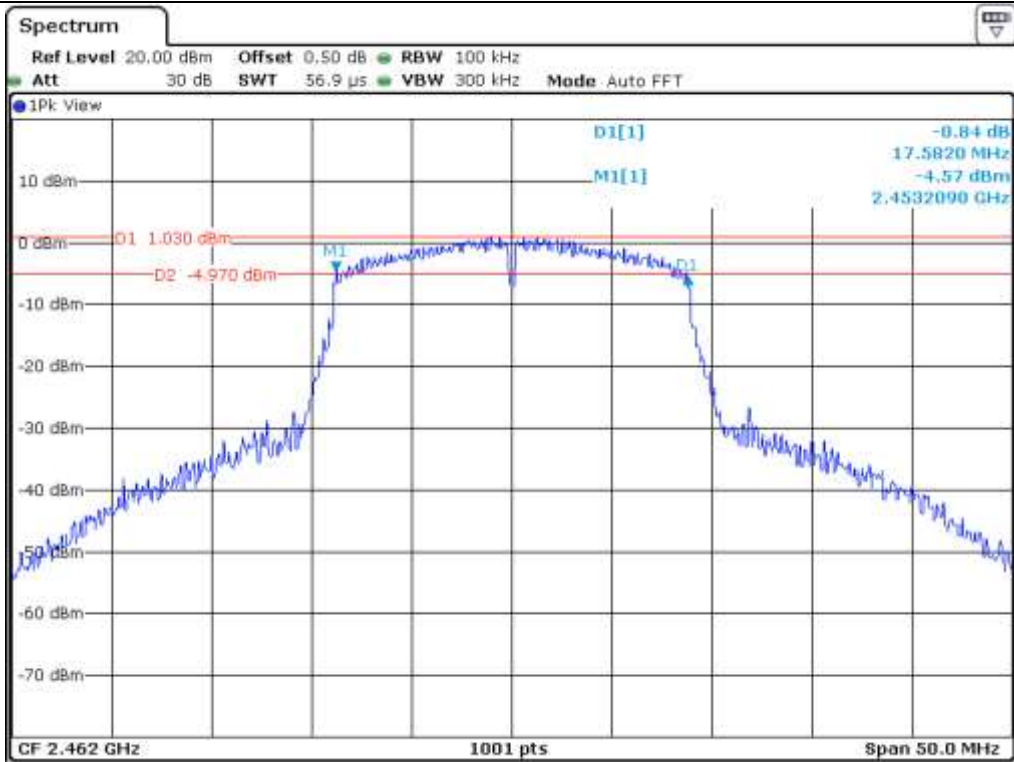

High Channel 11

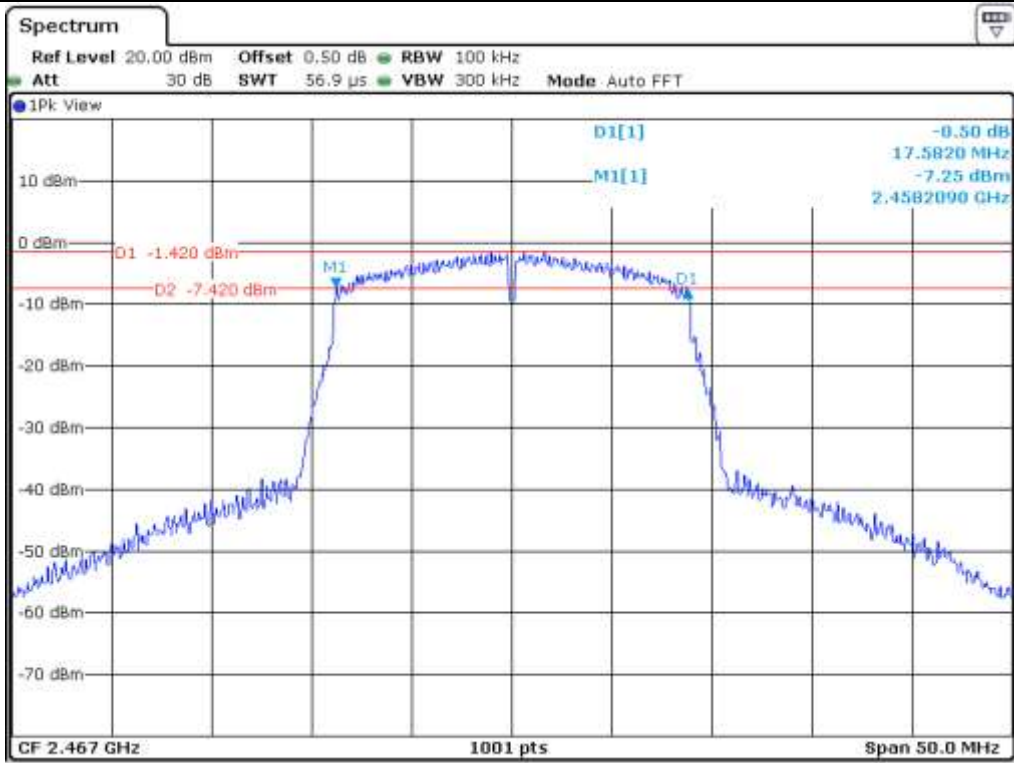

High Channel 12

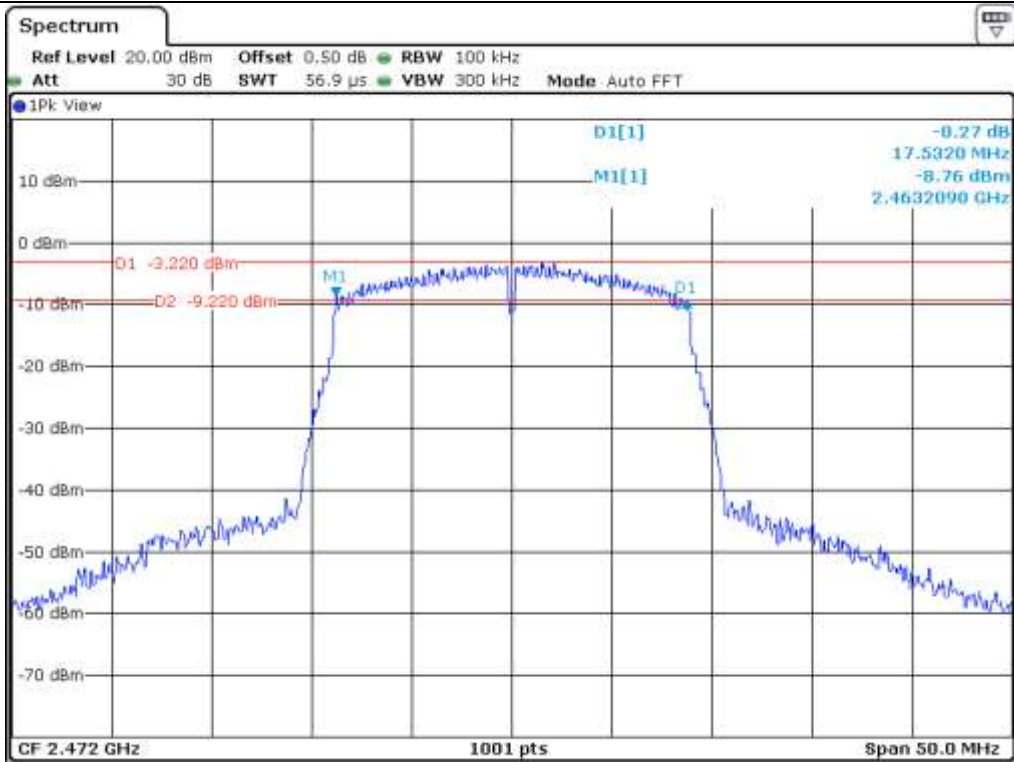


High Channel 13


7.6.2 Test data for Antenna 1

-. Test Result : Pass


CHANNEL	FREQUENCY (MHz)	6 dB Bandwidth (MHz)	LIMIT (MHz)	Margin (MHz)
Low	2 412.00	17.53	0.50	17.03
Middle	2 437.00	17.53	0.50	17.03
High 11	2 462.00	17.53	0.50	17.03
High 12	2 467.00	17.53	0.50	17.03
High 13	2 472.00	17.53	0.50	17.03

Remark. Margin = Measured Value - Limit

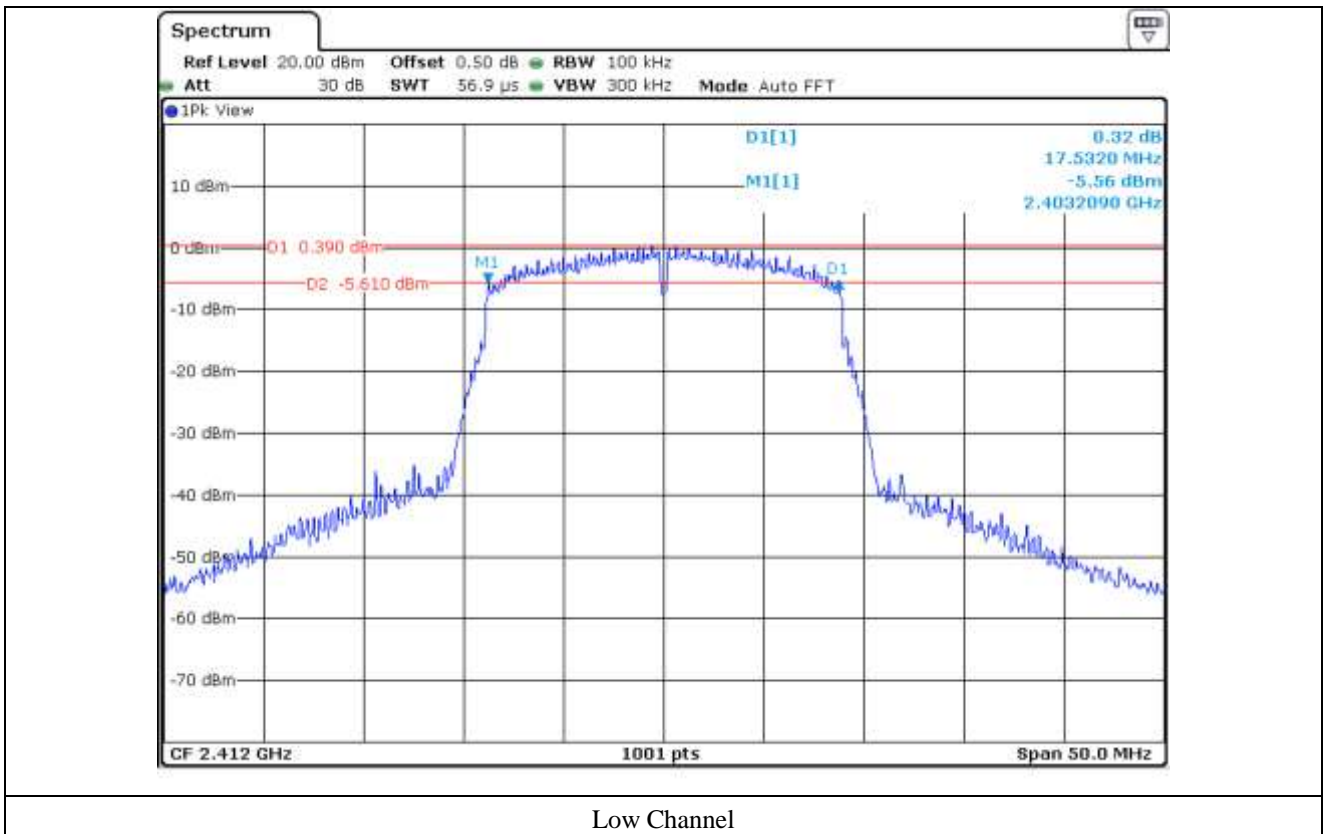


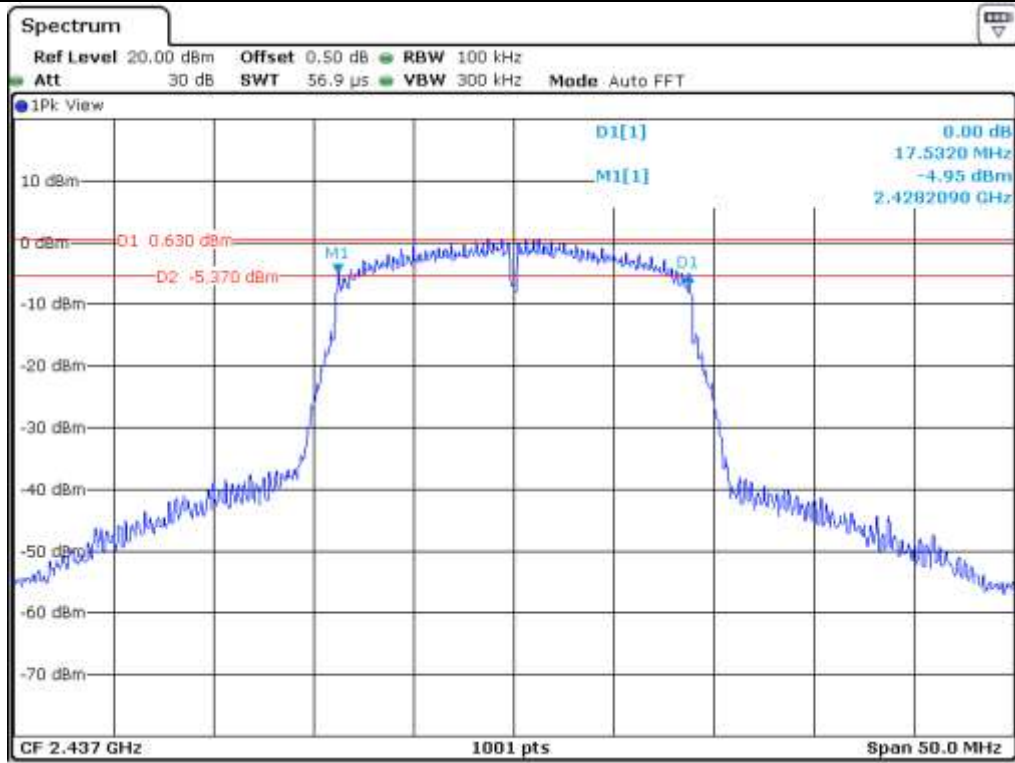


Middle Channel

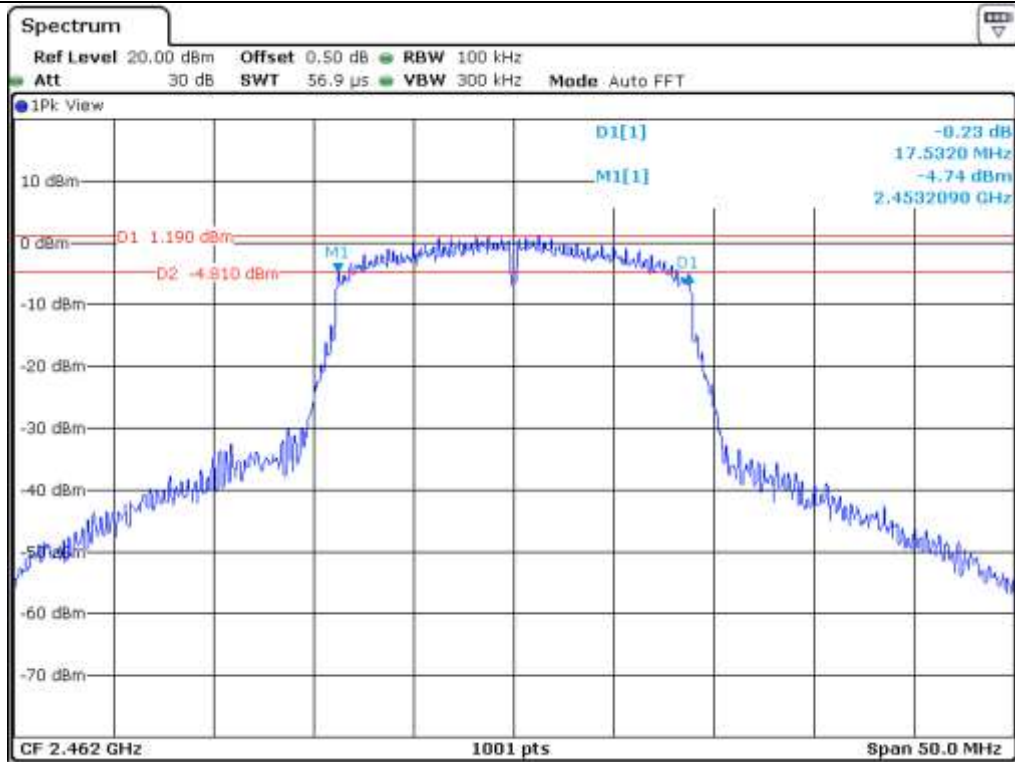

High Channel 11

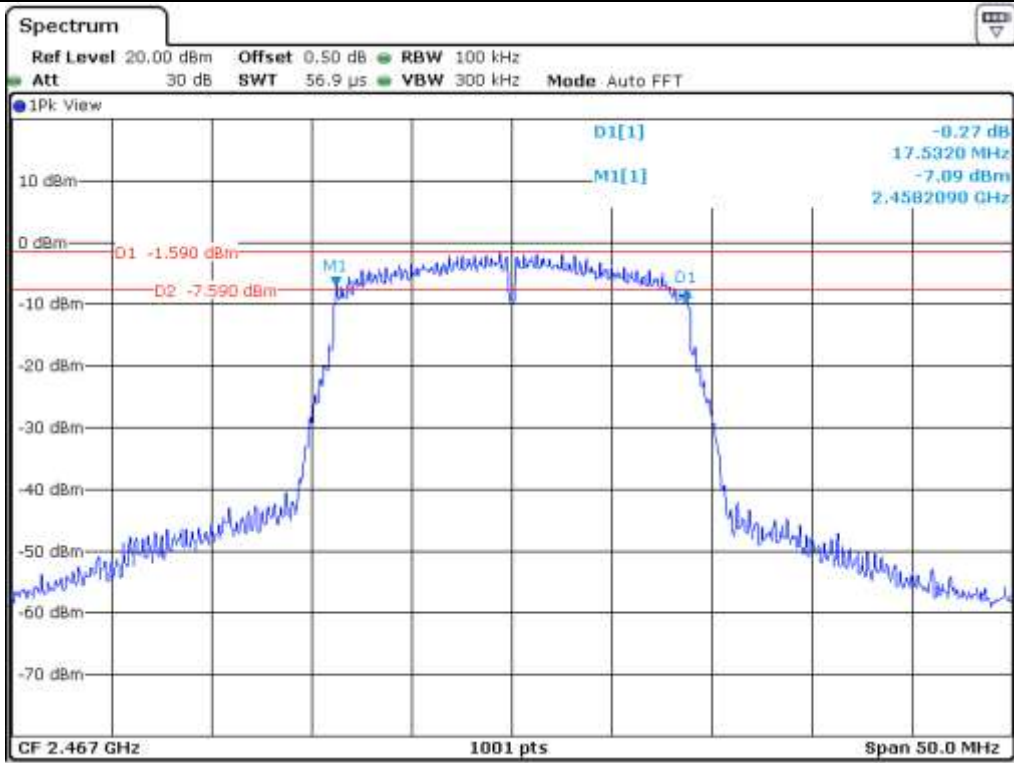

High Channel 12

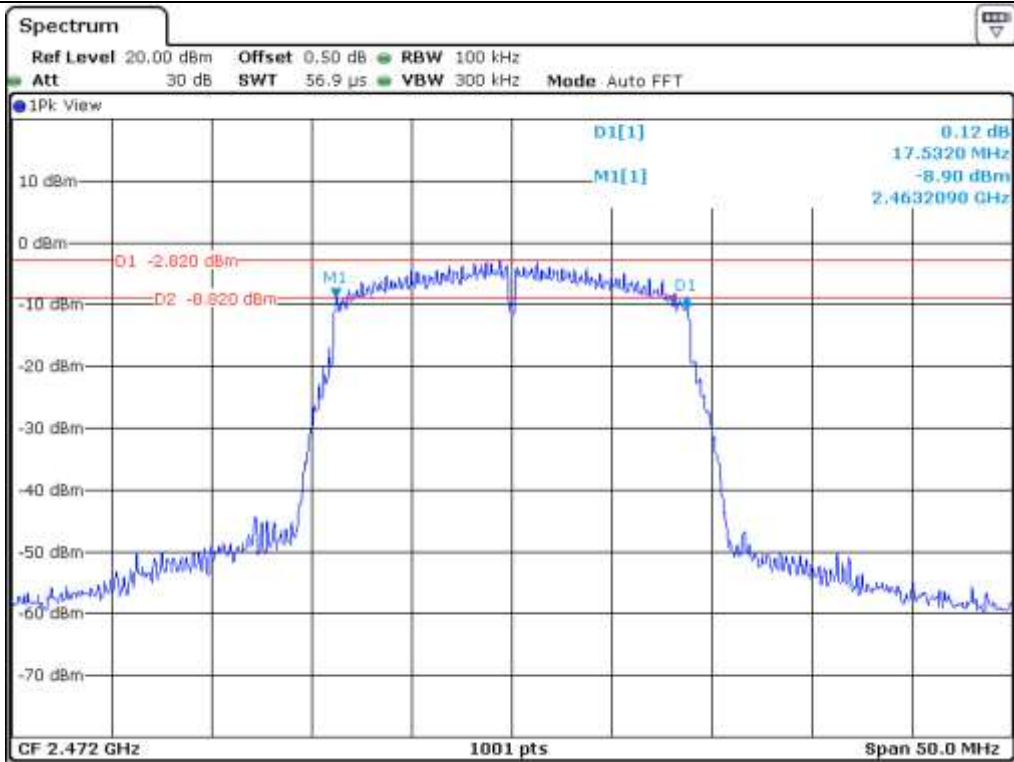

High Channel 13


7.7 Test data for 802.11n_HT40 WLAN Mode

7.7.1 Test data for Antenna 0


-. Test Result : Pass

CHANNEL	FREQUENCY (MHz)	6 dB Bandwidth (MHz)	LIMIT (MHz)	Margin (MHz)
Low	2 422.00	36.46	0.50	35.96
Middle	2 437.00	36.36	0.50	35.86
High 9	2 452.00	36.36	0.50	35.86
High 10	2 457.00	36.36	0.50	35.86
High 11	2 462.00	36.36	0.50	35.86


Remark. Margin = Measured Value - Limit

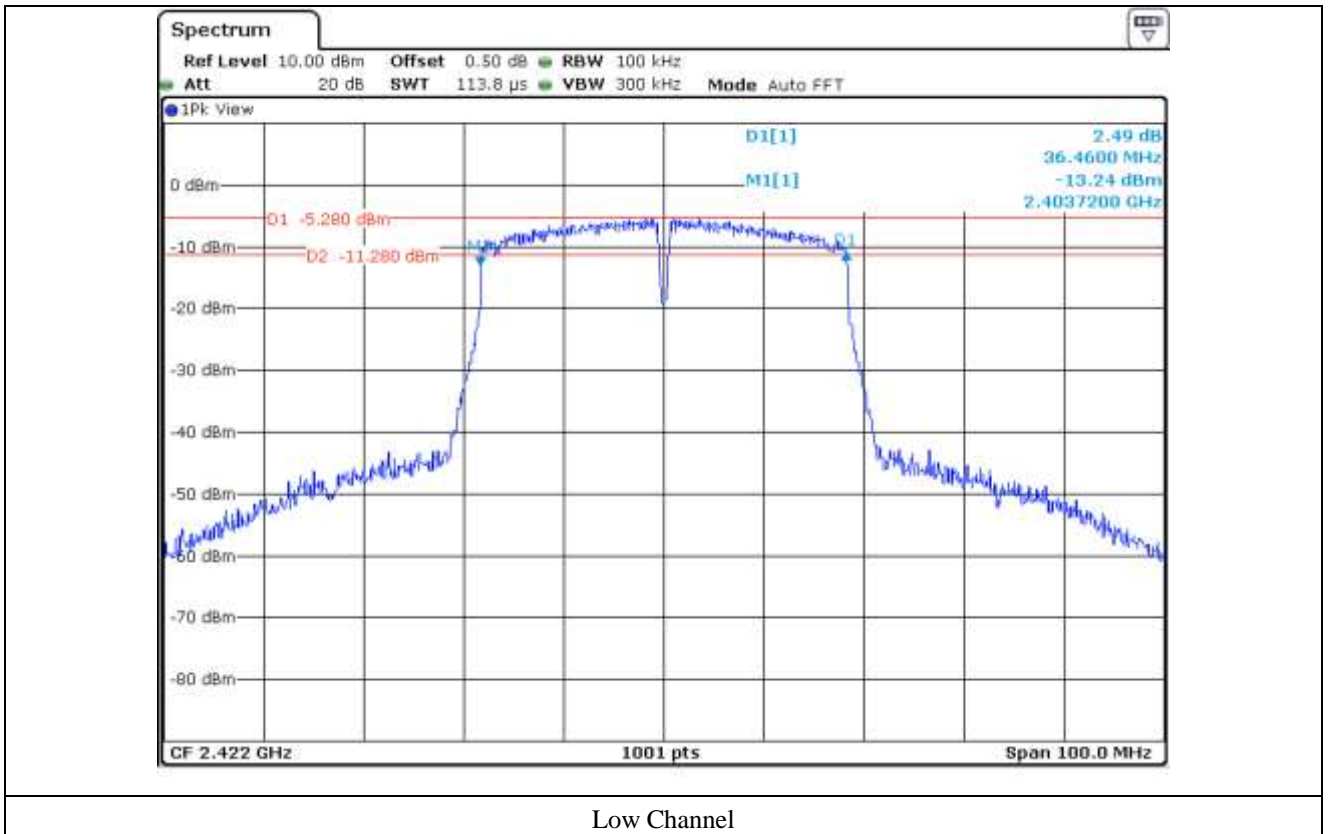


Low Channel

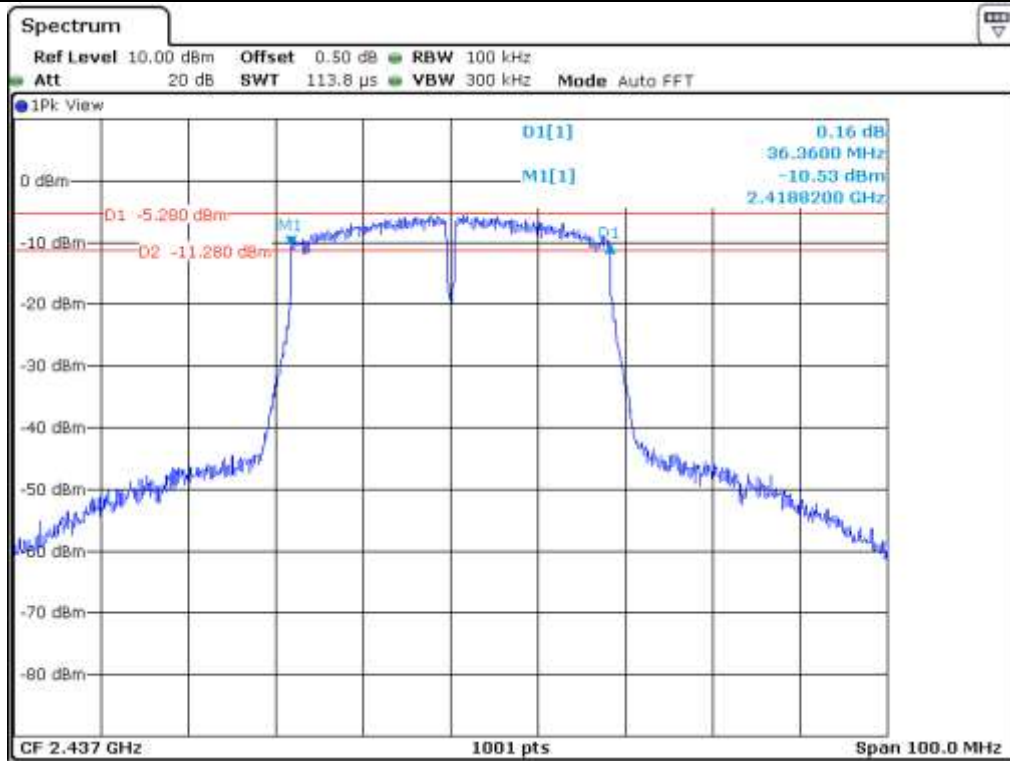


Middle Channel

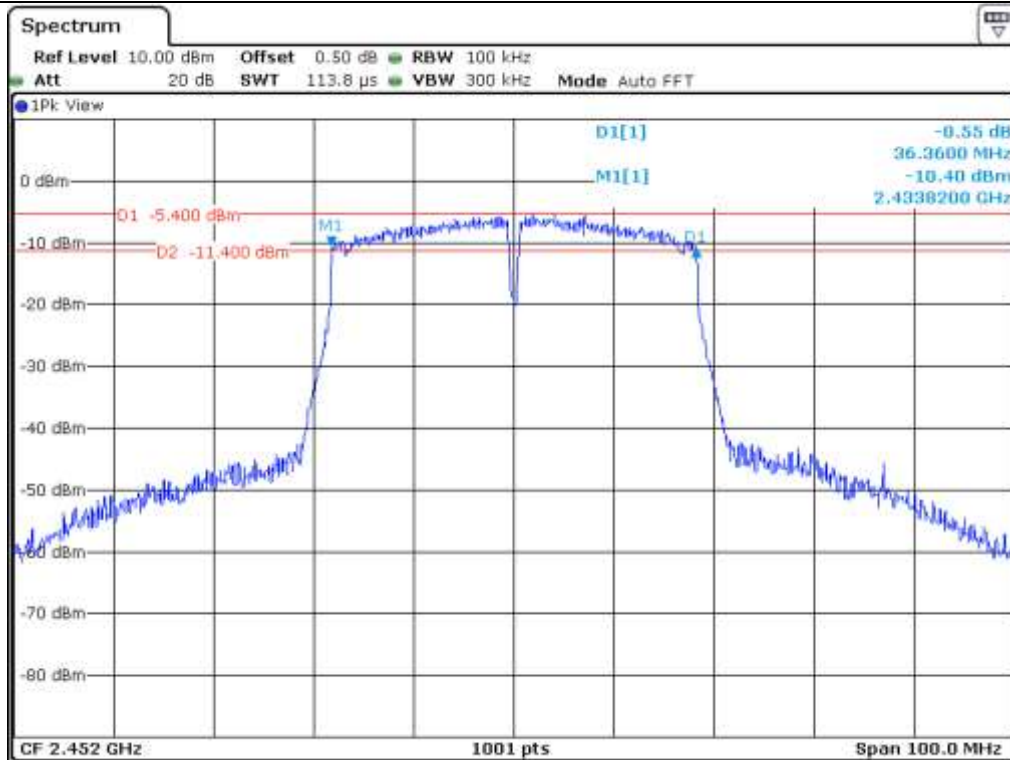

High Channel 9

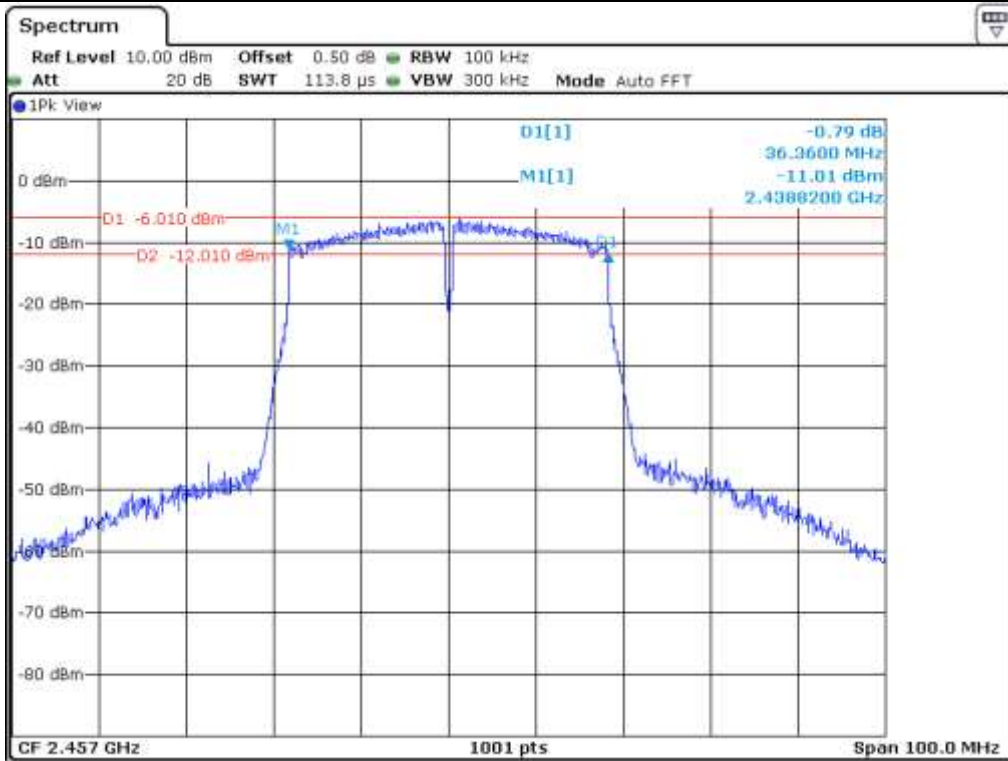

High Channel 10

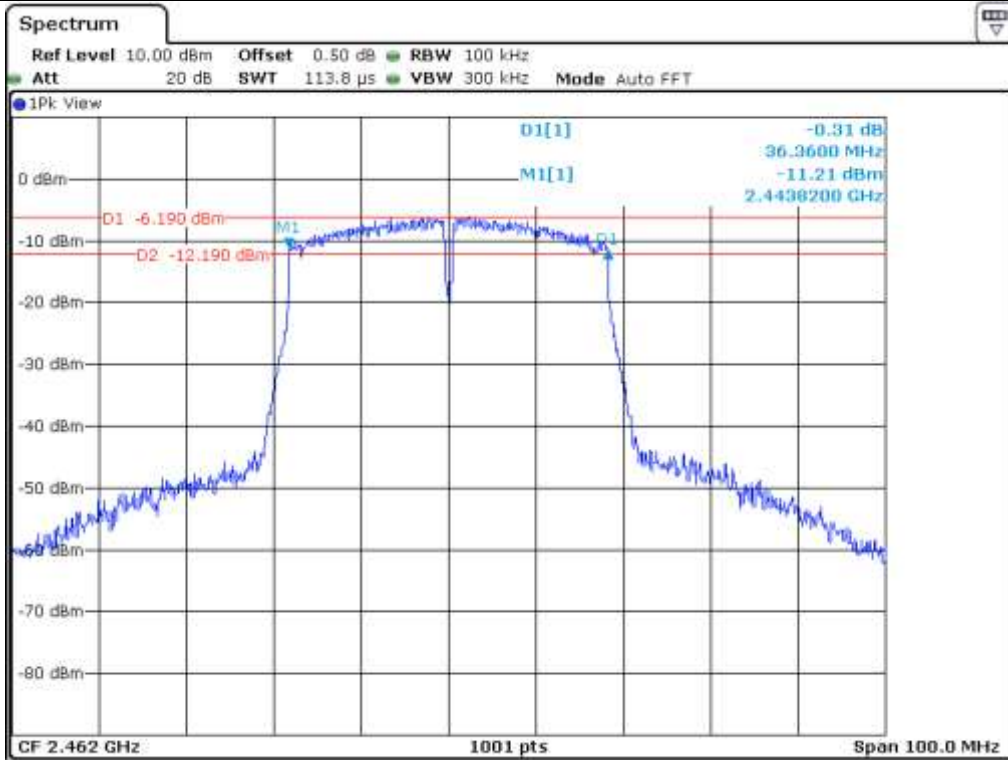


High Channel 11


7.7.2 Test data for Antenna 1

-. Test Result : Pass


CHANNEL	FREQUENCY (MHz)	6 dB Bandwidth (MHz)	LIMIT (MHz)	Margin (MHz)
Low	2 422.00	36.36	0.50	35.86
Middle	2 437.00	36.36	0.50	35.86
High 9	2 452.00	36.36	0.50	35.86
High 10	2 457.00	36.36	0.50	35.86
High 11	2 462.00	36.06	0.50	35.56

Remark. Margin = Measured Value - Limit

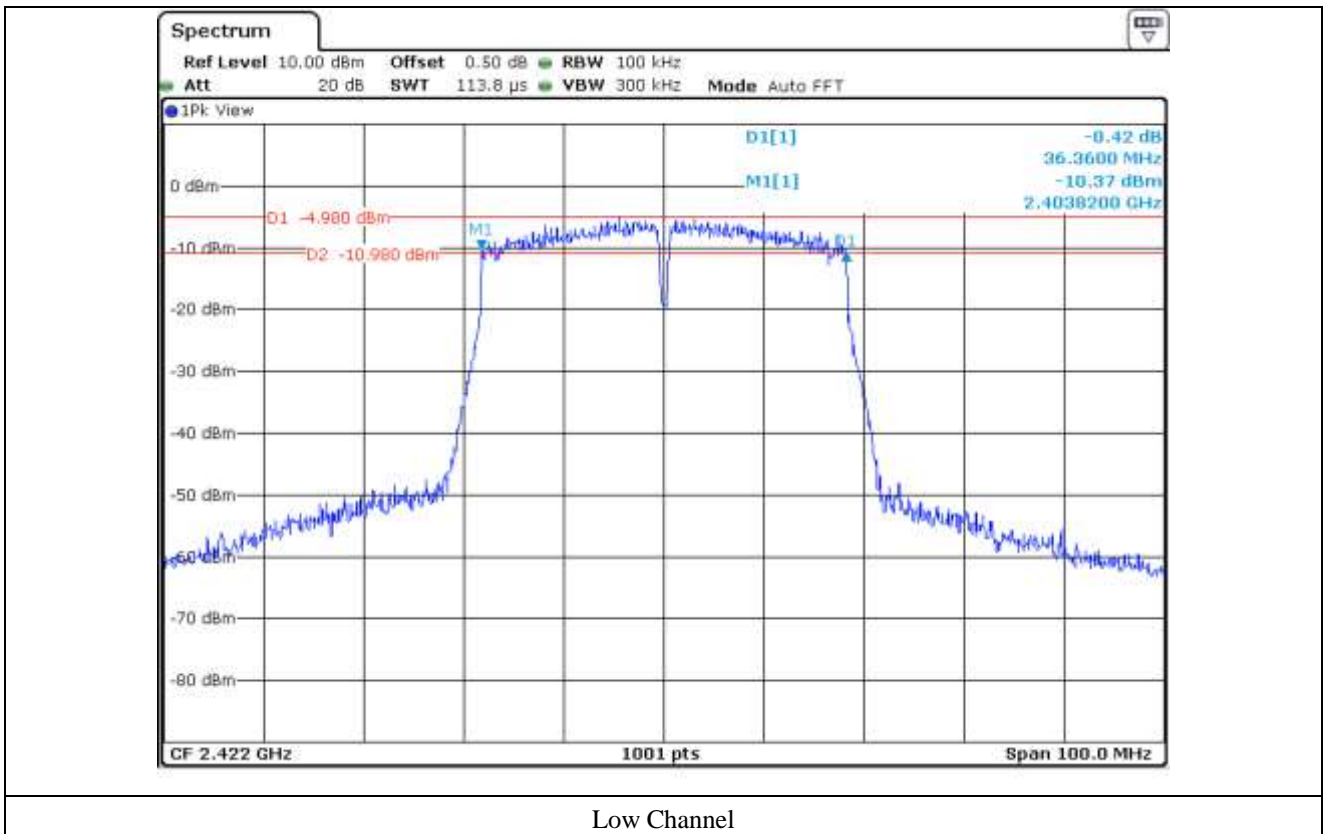


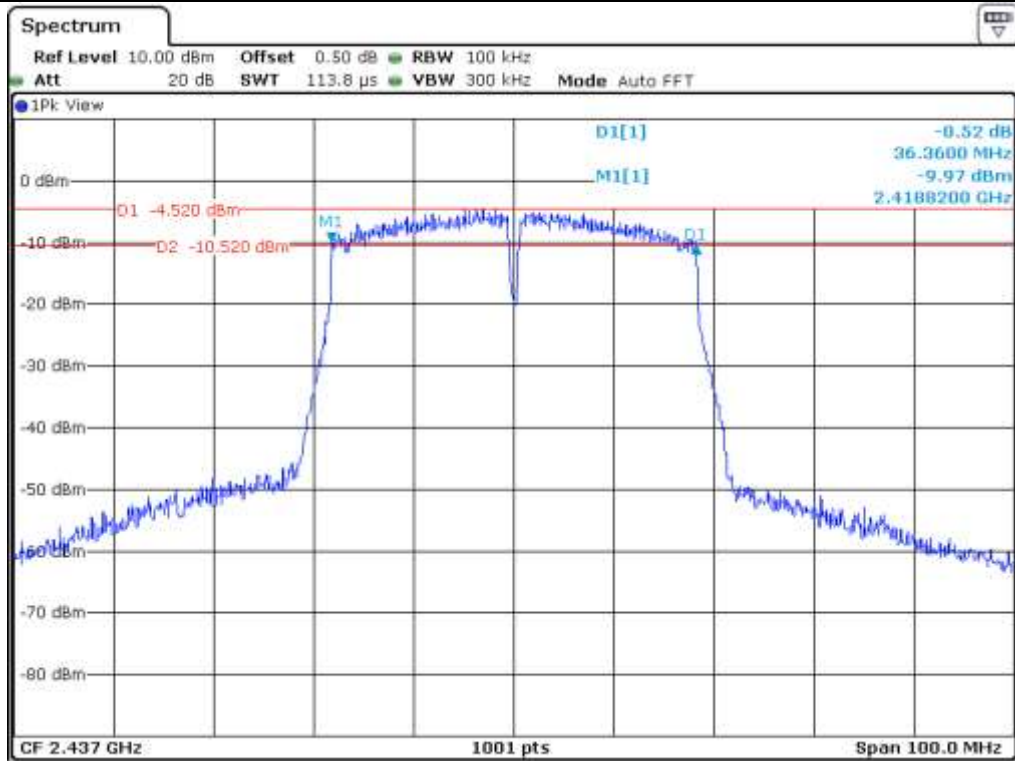


Middle Channel

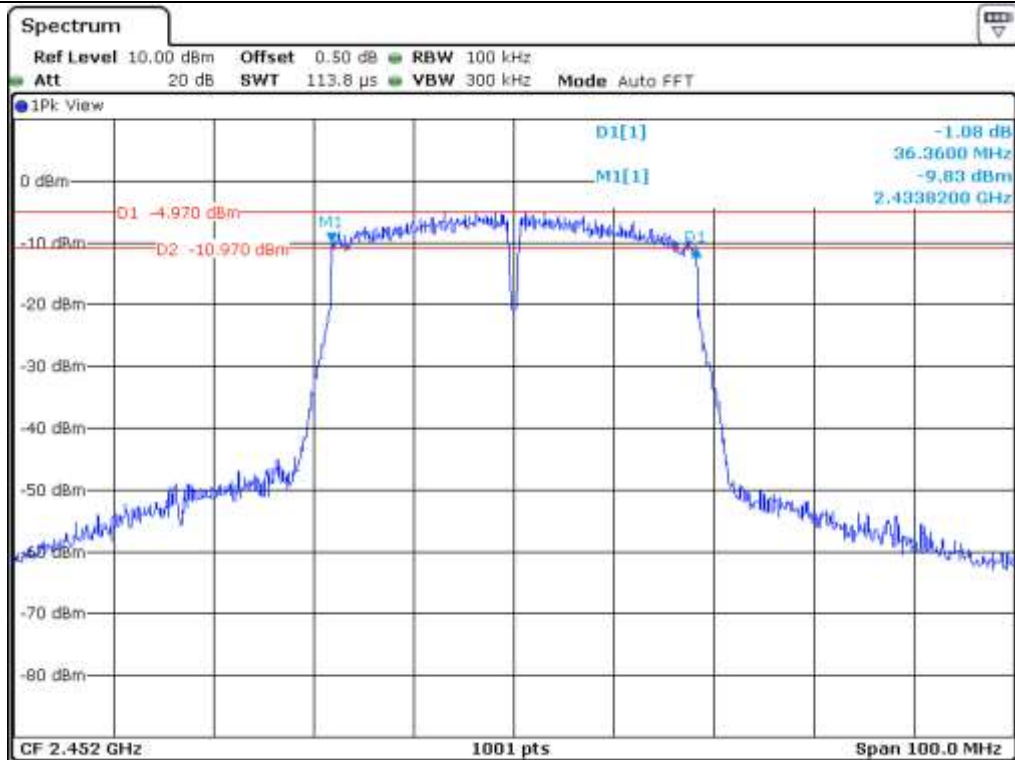

High Channel 9

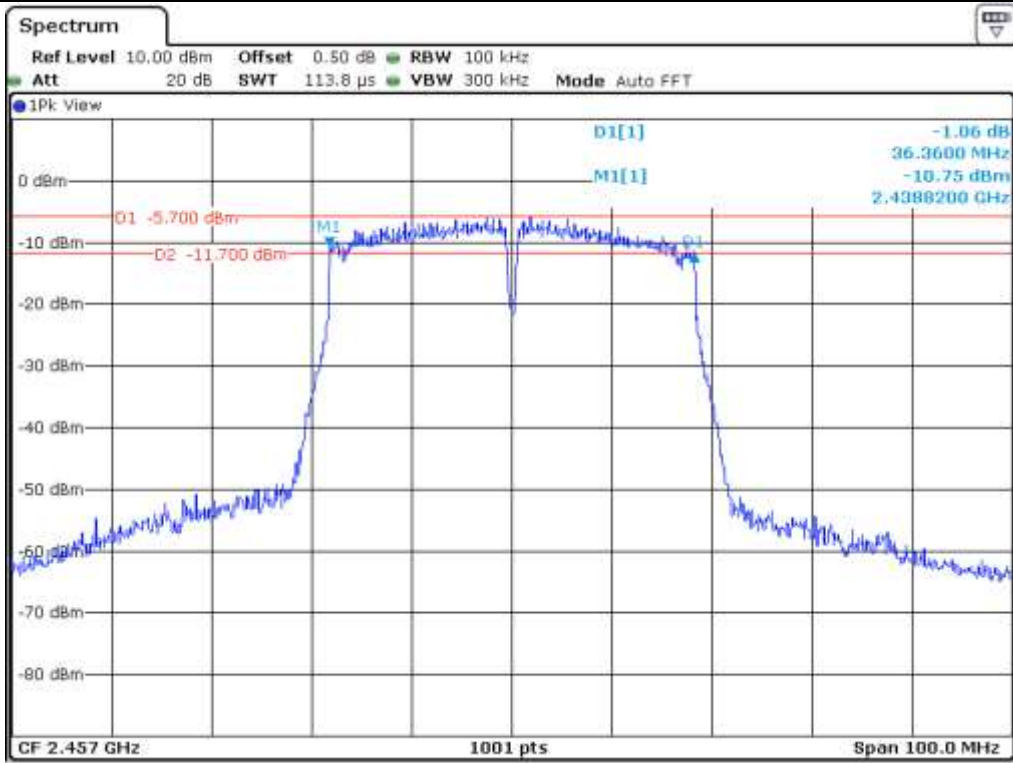

High Channel 10

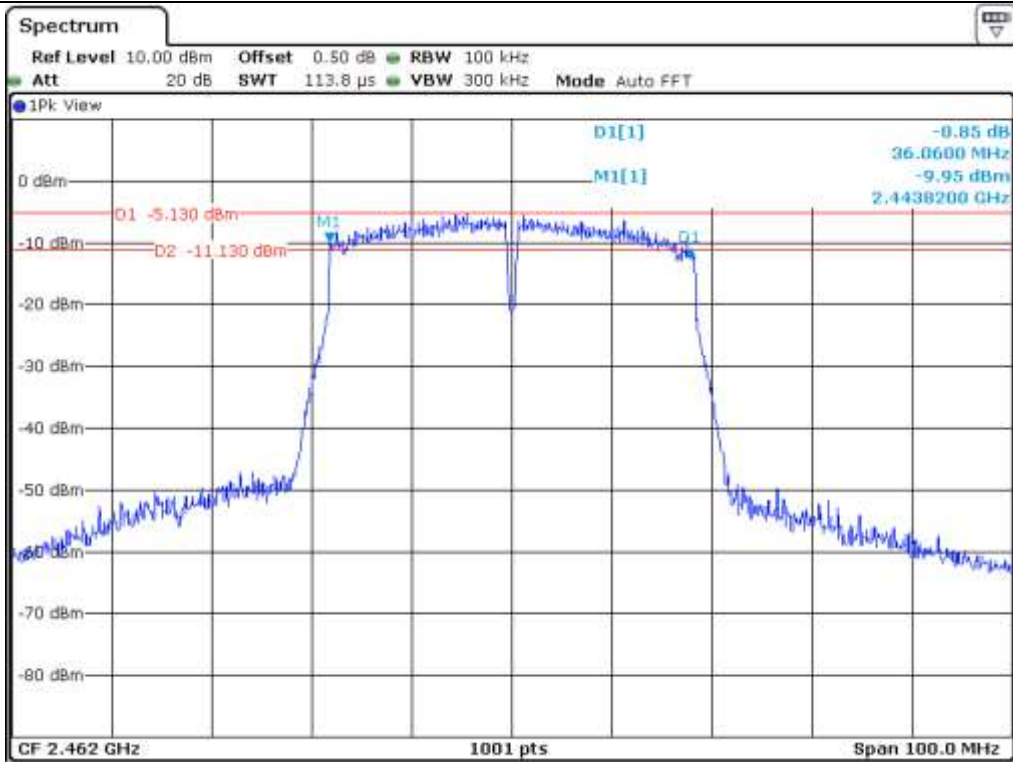

High Channel 11


8. MAXIMUM CONDUCTED (AVERAGE) OUTPUT POWER

8.1 Operating environment

Temperature : 23 °C
 Relative humidity : 41 % R.H.

8.2 Test set-up

The maximum peak output power was measured with the wide band sensor connected to the antenna output of the EUT.
 The Wide Band Sensor is measured when the EUT is transmitting at the appropriate center frequency its maximum power control level as described in Section 8.3(558074 D01 15.247 Meas Guidance v05r02).
 Since this measurement is made only during the ON time of the transmitter, no duty cycle correction is required.

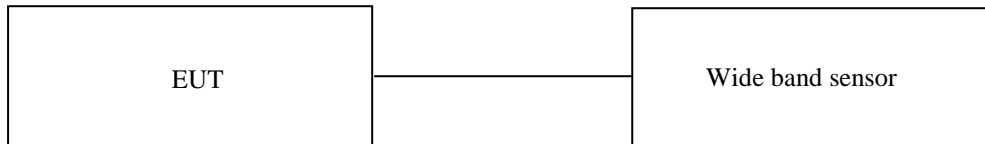

8.3 Test Date

August 21, 2020 ~ September 08, 2020

8.4 Test data for 802.11b WLAN Mode`

8.4.1 Test data for Antenna 0

-. Test Result : Pass

-. Duty Cycle : > 98 %

CHANNEL	FREQUENCY (MHz)	MEASURED VALUE (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 412.00	17.95	30.00	12.05
MIDDLE	2 437.00	18.09	30.00	11.91
HIGH 11	2 462.00	17.47	30.00	12.53
HIGH 12	2 467.00	15.49	30.00	14.51
HIGH 13	2 472.00	14.12	30.00	15.88

Remark : Margin = Limit – Measured Value (=Power Sensor Reading + Cable Loss)

8.4.2 Test data for Antenna 1

-. Test Result : Pass

-. Duty Cycle : > 98 %

CHANNEL	FREQUENCY (MHz)	MEASURED VALUE (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 412.00	18.22	30.00	11.78
MIDDLE	2 437.00	19.42	30.00	10.58
HIGH 11	2 462.00	20.03	30.00	9.97
HIGH 12	2 467.00	17.02	30.00	12.98
HIGH 13	2 472.00	15.82	30.00	14.18

Remark : Margin = Limit – Measured Value (=Power Sensor Reading + Cable Loss)

8.5 Test data for 802.11g WLAN Mode

8.5.1 Test data for Antenna 0

- Test Result : Pass
- Duty Cycle : > 98 %

CHANNEL	FREQUENCY (MHz)	MEASURED VALUE (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 412.00	14.25	30.00	15.75
MIDDLE	2 437.00	14.37	30.00	15.63
HIGH 11	2 462.00	14.56	30.00	15.44
HIGH 12	2 467.00	12.74	30.00	17.26
HIGH 13	2 472.00	10.68	30.00	19.32

Remark : Margin = Limit – Measured Value (=Power Sensor Reading + Cable Loss)

8.5.2 Test data for Antenna 1

- Test Result : Pass
- Duty Cycle : > 98 %

CHANNEL	FREQUENCY (MHz)	MEASURED VALUE (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 412.00	13.66	30.00	16.34
MIDDLE	2 437.00	14.20	30.00	15.80
HIGH 11	2 462.00	14.26	30.00	15.74
HIGH 12	2 467.00	12.22	30.00	17.78
HIGH 13	2 472.00	10.32	30.00	19.68

Remark : Margin = Limit – Measured Value (=Power Sensor Reading + Cable Loss)

8.5.3 Test data for Multiple Transmit

- Test Result : Pass
- Duty Cycle : > 98 %

CHANNEL	FREQUENCY (MHz)	MEASURED VALUE (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 412.00	16.98	30.00	13.02
MIDDLE	2 437.00	17.30	30.00	12.70
HIGH 11	2 462.00	17.42	30.00	12.58
HIGH 12	2 467.00	15.50	30.00	14.50
HIGH 13	2 472.00	13.51	30.00	16.49

Remark 1 : Margin = Limit – Measured Value (=Power Sensor Reading + Cable Loss)

Remark 2 : Calculated Output Power= 10log (10(Antenna0 Output Power/10)+10(Antenna1 Output Power/10))

Remark 3 : Directional gain = 10*log[(10G0/20+10G1/20)2/N] dBi

8.6 Test data for 802.11n_HT20 WLAN Mode

8.6.1 Test data for Antenna 0

- Test Result : Pass
- Duty Cycle : > 98 %

CHANNEL	FREQUENCY (MHz)	MEASURED VALUE (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 412.00	13.97	30.00	16.03
MIDDLE	2 437.00	14.30	30.00	15.70
HIGH 11	2 462.00	14.34	30.00	15.66
HIGH 12	2 467.00	11.99	30.00	18.01
HIGH 13	2 472.00	10.47	30.00	19.53

Remark : Margin = Limit – Measured Value (=Power Sensor Reading + Cable Loss)

8.6.2 Test data for Antenna 1

- Test Result : Pass
- Duty Cycle : > 98 %

CHANNEL	FREQUENCY (MHz)	MEASURED VALUE (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 412.00	13.46	30.00	16.54
MIDDLE	2 437.00	13.80	30.00	16.20
HIGH 11	2 462.00	14.14	30.00	15.86
HIGH 12	2 467.00	11.65	30.00	18.35
HIGH 13	2 472.00	10.37	30.00	19.63

Remark : Margin = Limit – Measured Value (=Power Sensor Reading + Cable Loss)

8.6.3 Test data for Multiple Transmit

- Test Result : Pass
- Duty Cycle : > 98 %

CHANNEL	FREQUENCY (MHz)	MEASURED VALUE (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 412.00	16.73	30.00	13.27
MIDDLE	2 437.00	17.07	30.00	12.93
HIGH 11	2 462.00	17.25	30.00	12.75
HIGH 12	2 467.00	14.83	30.00	15.17
HIGH 13	2 472.00	13.43	30.00	16.57

Remark 1 : Margin = Limit – Measured Value (=Power Sensor Reading + Cable Loss)

Remark 2 : Calculated Output Power= $10\log(10^{(\text{Antenna0 Output Power}/10)} + 10^{(\text{Antenna1 Output Power}/10)})$

Remark 3 : Directional gain = $10*\log[(10^{G0/20} + 10^{G1/20})^2/N]$ dBi

8.7 Test data for 802.11n_HT40 WLAN Mode

8.7.1 Test data for Antenna 0

- Test Result : Pass
- Duty Cycle : > 98 %

CHANNEL	FREQUENCY (MHz)	MEASURED VALUE (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 422.00	12.05	30.00	17.95
MIDDLE	2 437.00	12.40	30.00	17.60
HIGH 9	2 452.00	12.05	30.00	17.95
HIGH 10	2 457.00	11.09	30.00	18.91
HIGH 11	2 462.00	11.49	30.00	18.51

Remark : Margin = Limit – Measured Value (=Power Sensor Reading + Cable Loss)

8.7.2 Test data for Antenna 1

- Test Result : Pass
- Duty Cycle : > 98 %

CHANNEL	FREQUENCY (MHz)	MEASURED VALUE (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 422.00	11.44	30.00	18.56
MIDDLE	2 437.00	12.20	30.00	17.80
HIGH 9	2 452.00	11.35	30.00	18.65
HIGH 10	2 457.00	10.53	30.00	19.47
HIGH 11	2 462.00	11.19	30.00	18.81

Remark : Margin = Limit – Measured Value (=Power Sensor Reading + Cable Loss)

8.7.3 Test data for Multiple Transmit

- Test Result : Pass
- Duty Cycle : > 98 %

CHANNEL	FREQUENCY (MHz)	MEASURED VALUE (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 422.00	14.77	30.00	15.23
MIDDLE	2 437.00	15.31	30.00	14.69
HIGH 9	2 452.00	14.72	30.00	15.28
HIGH 10	2 457.00	13.83	30.00	16.17
HIGH 11	2 462.00	14.35	30.00	15.65

Remark 1 : Margin = Limit – Measured Value (=Power Sensor Reading + Cable Loss)

Remark 2 : Calculated Output Power= $10\log(10^{(\text{Antenna0 Output Power}/10)} + 10^{(\text{Antenna1 Output Power}/10)})$

Remark 3 : Directional gain = $10*\log[(10^{G0/20} + 10^{G1/20})^2/N]$ dBi


9. 100 kHz BANDWIDTH OUTSIDE THE FREQUENCY BAND

9.1 Operating environment

Temperature : 23 °C
Relative humidity : 41 % R.H.

9.2 Test set-up for conducted measurement

The antenna output of the EUT was connected to the spectrum analyzer. The resolution and video bandwidth is set to 100 kHz, and peak detection was used.

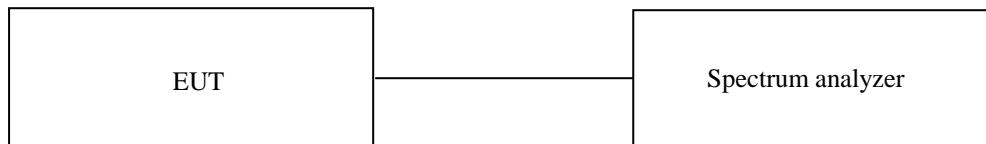

9.3 Test set-up for radiated measurement

The radiated emissions measurements were performed on the 3 m semi anechoic chamber. The EUT was placed on turntable approximately 1.5 m above the ground plane.

The frequency spectrum from 30 MHz to 26.5 GHz was scanned and maximum emission levels at each frequency recorded. The system was rotated 360°, and the antenna was varied in the height between 1.0 m and 4.0 m in order to determine the maximum emission levels. This procedure was performed for horizontal and vertical polarization of the receiving antenna.


9.4 Test Date

August 21, 2020 ~ September 08, 2020


9.5 Test data for conducted emission

9.5.1 Test data for 802.11b WLAN Mode


9.5.1.1 Test data for Antenna 0

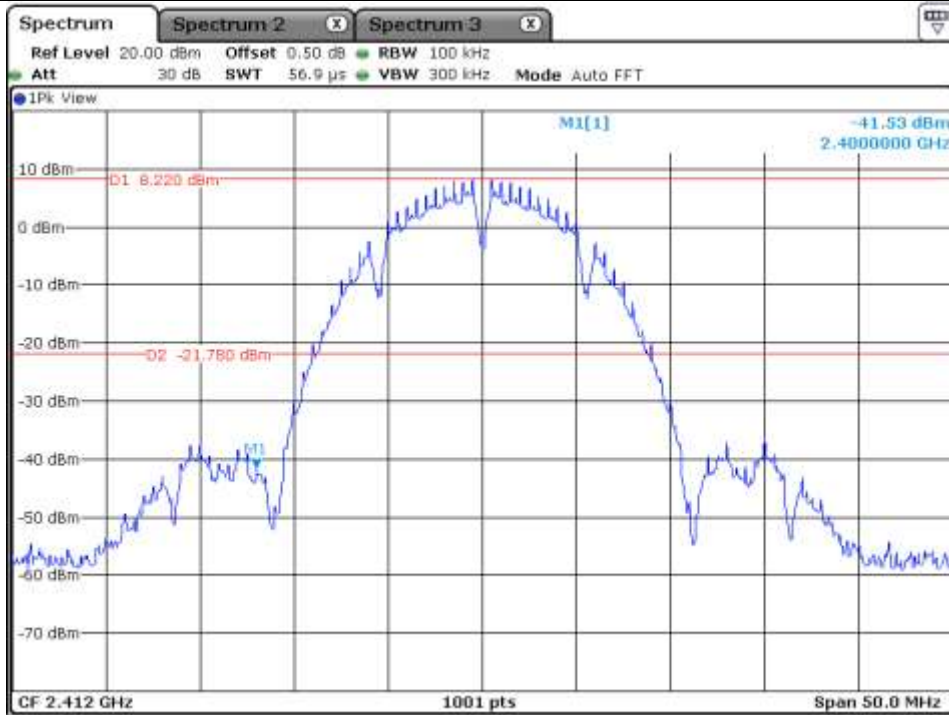


Low Channel

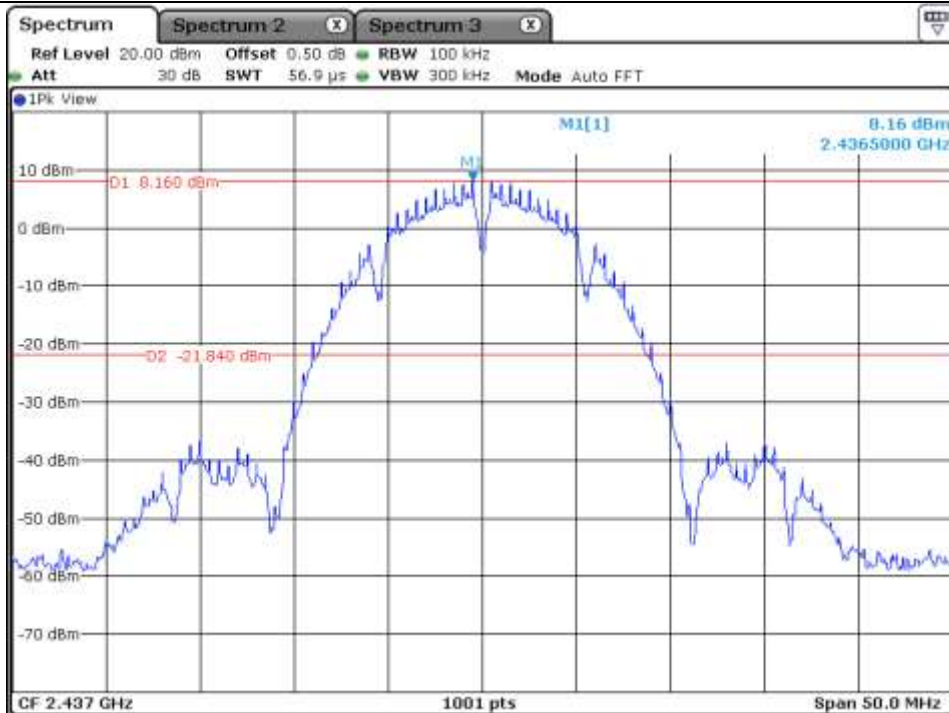


Middle Channel

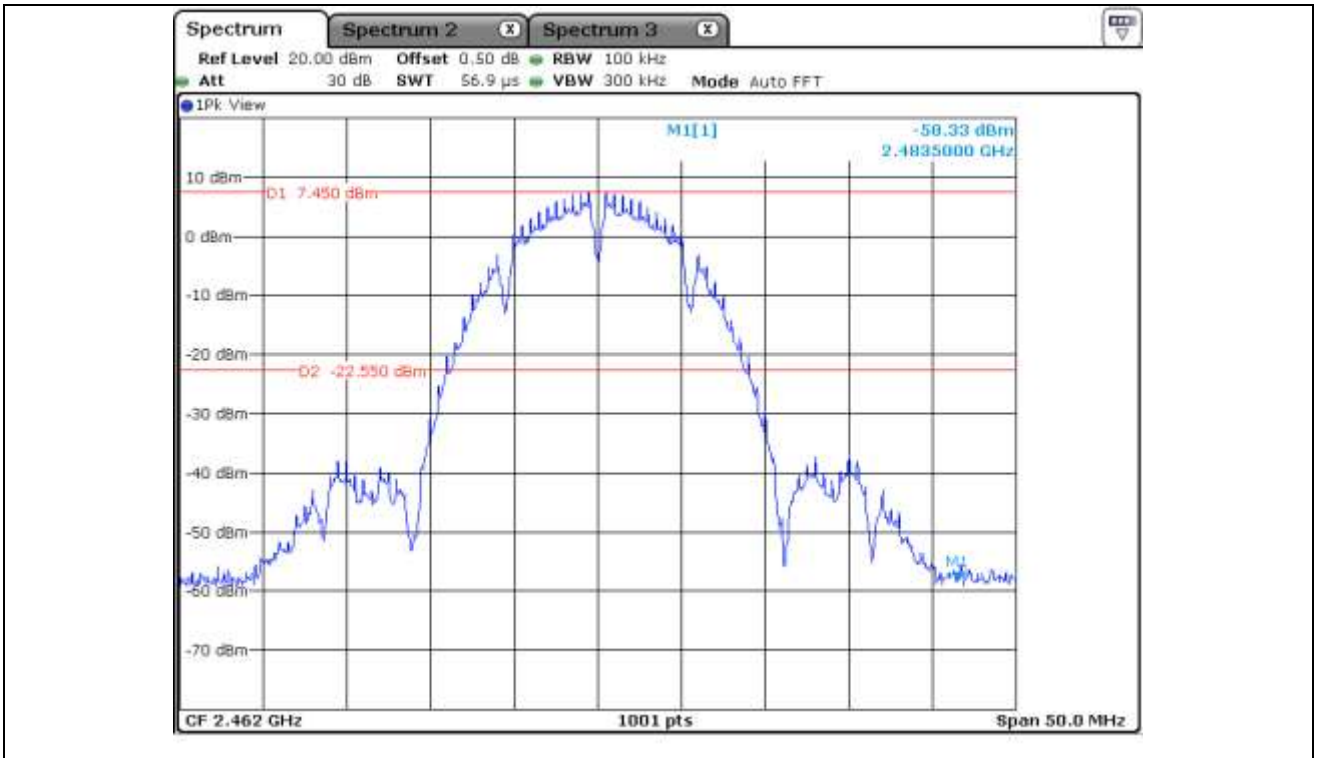


High Channel 11

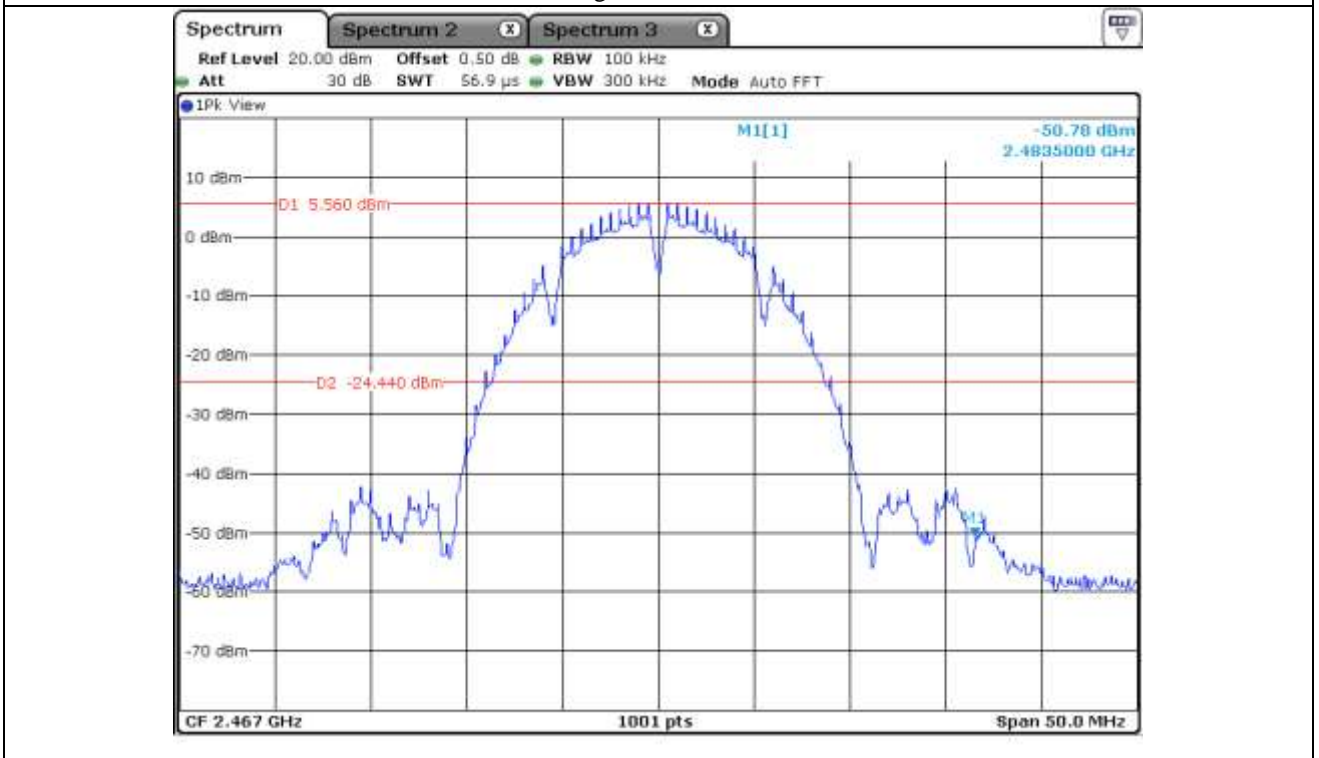


High Channel 12

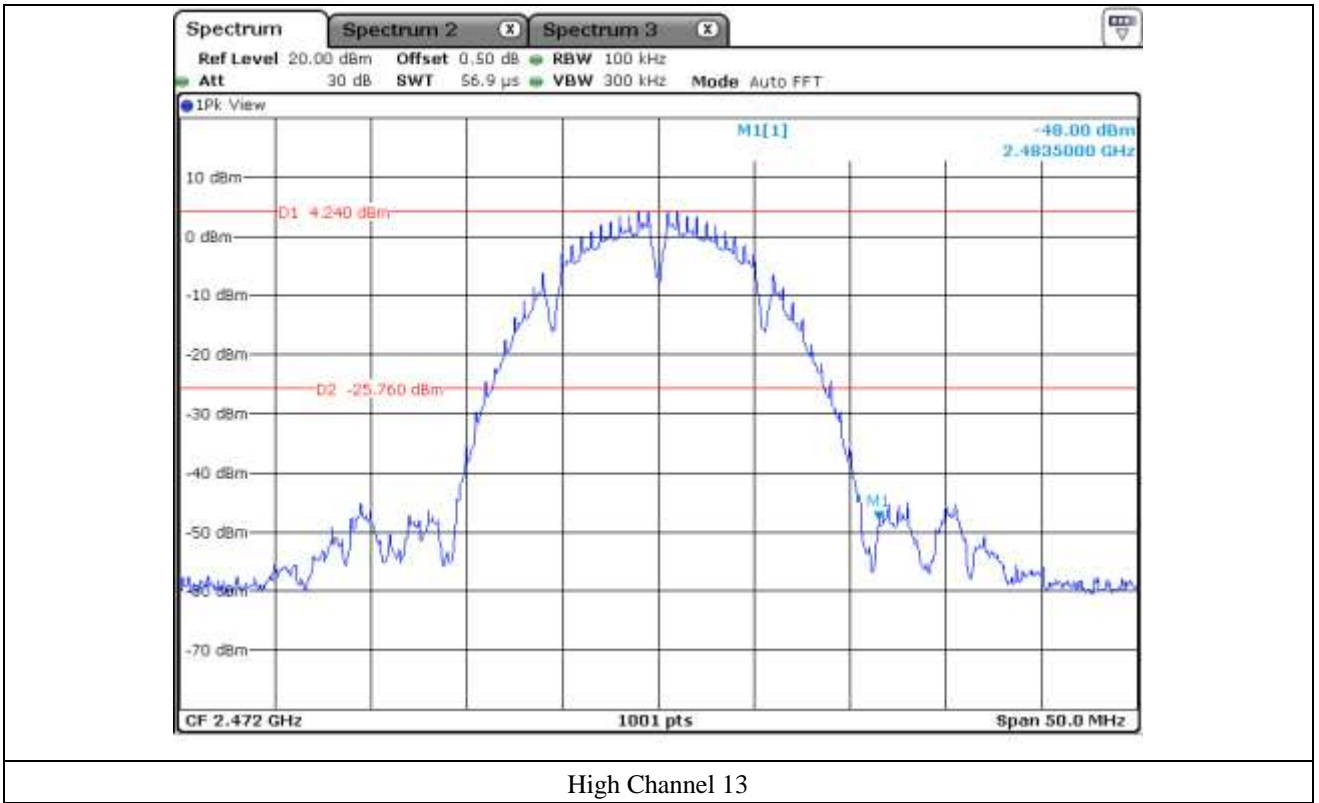


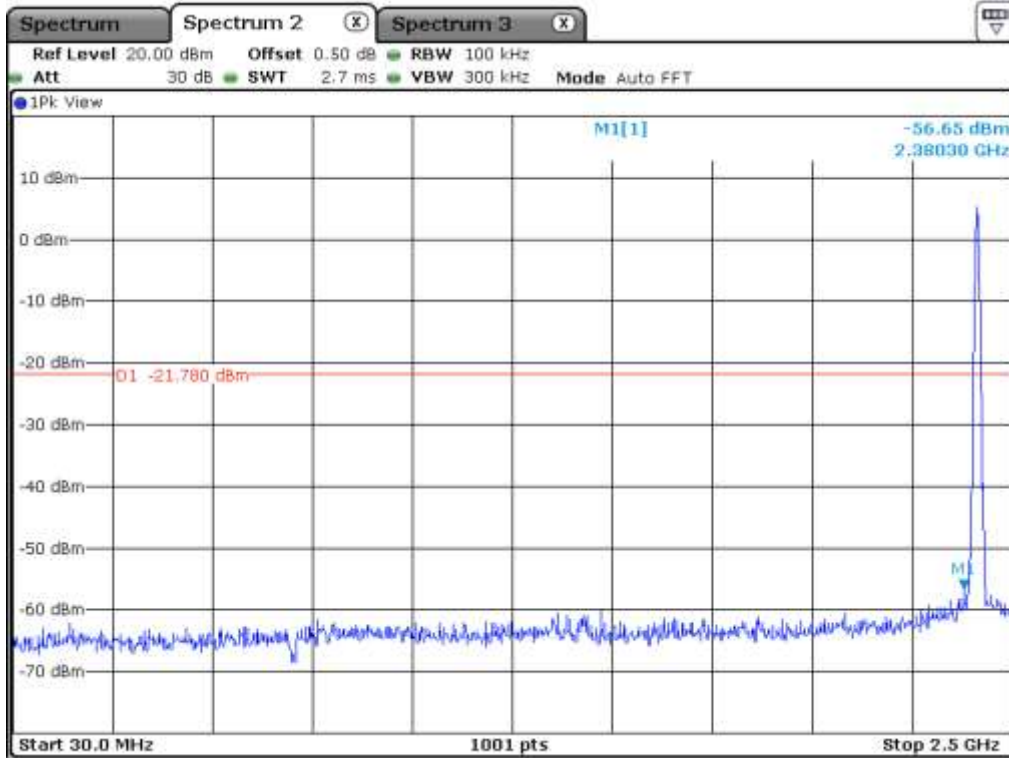


Low Channel

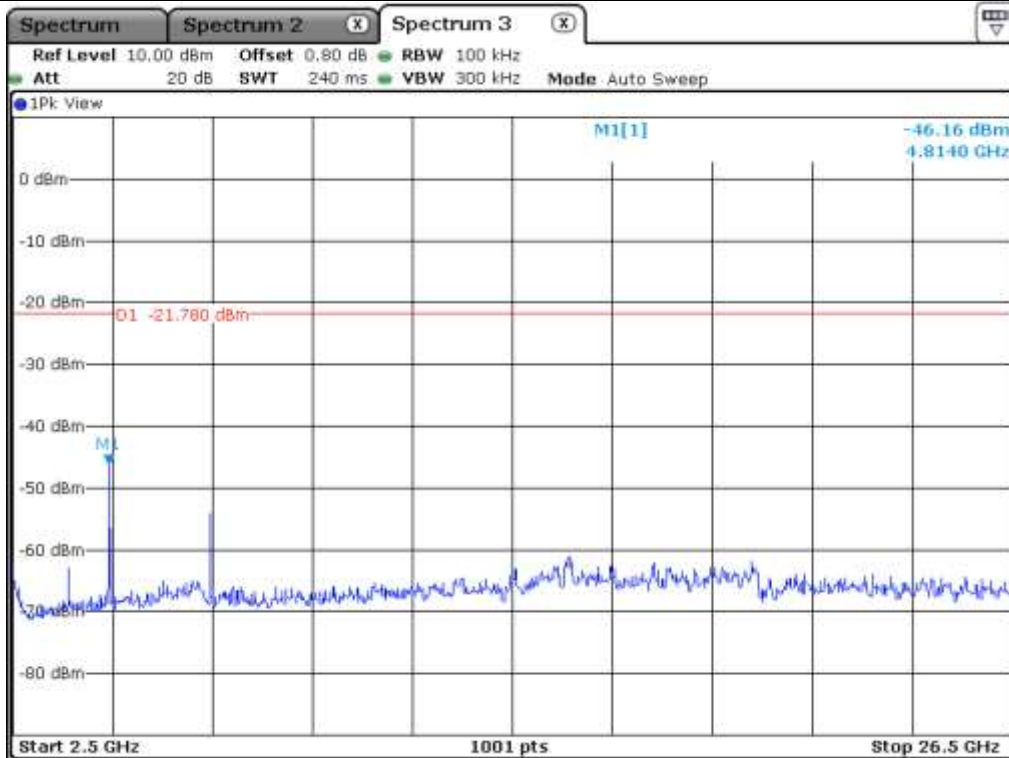


Low Channel

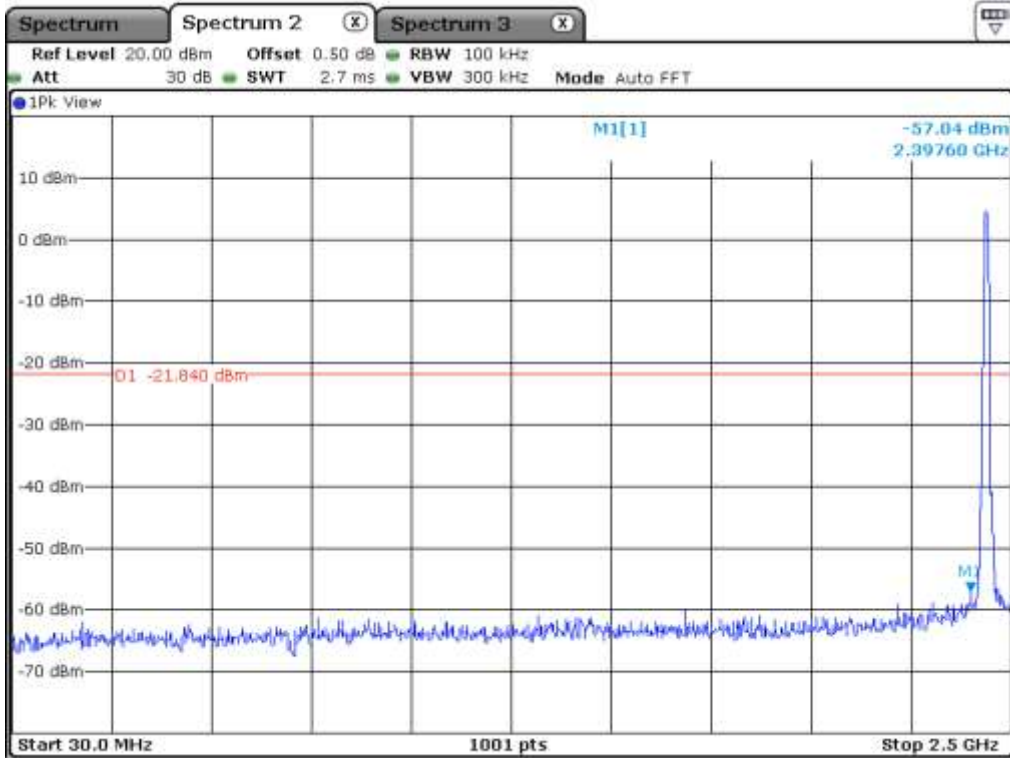


Middle Channel

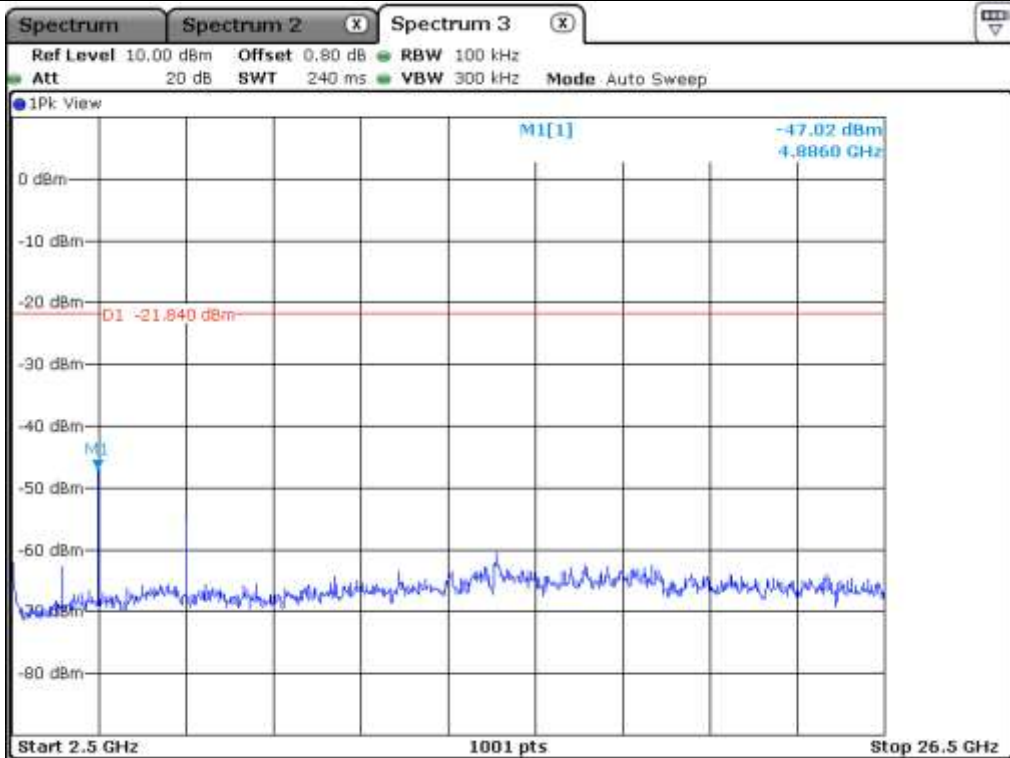


Middle Channel

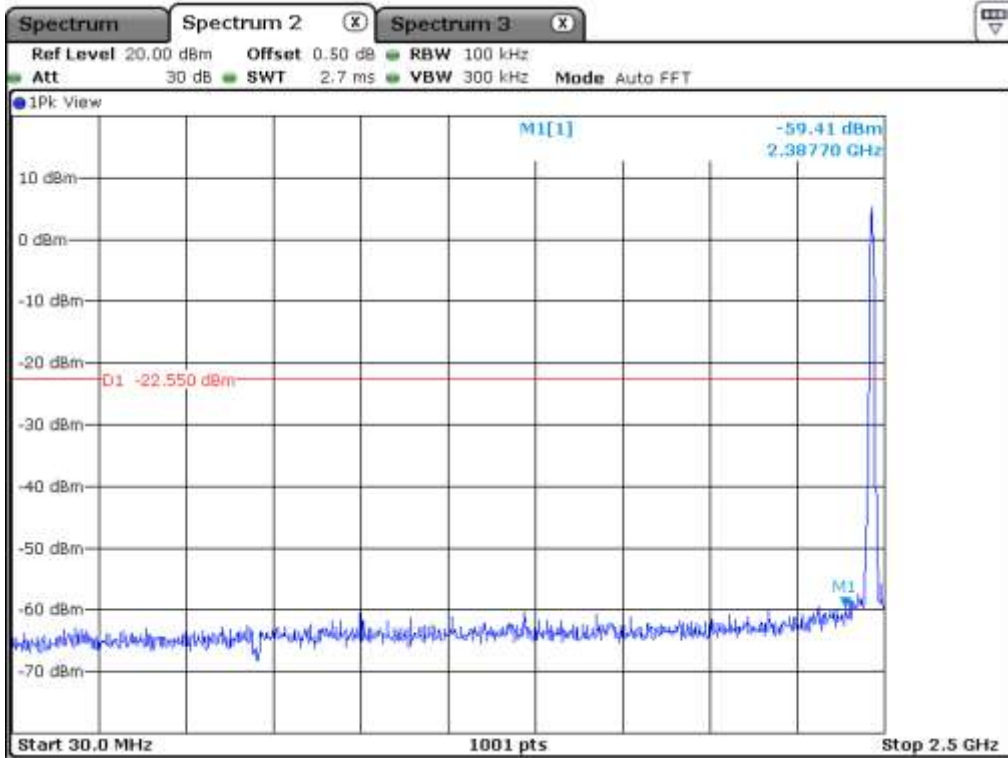


High Channel 11

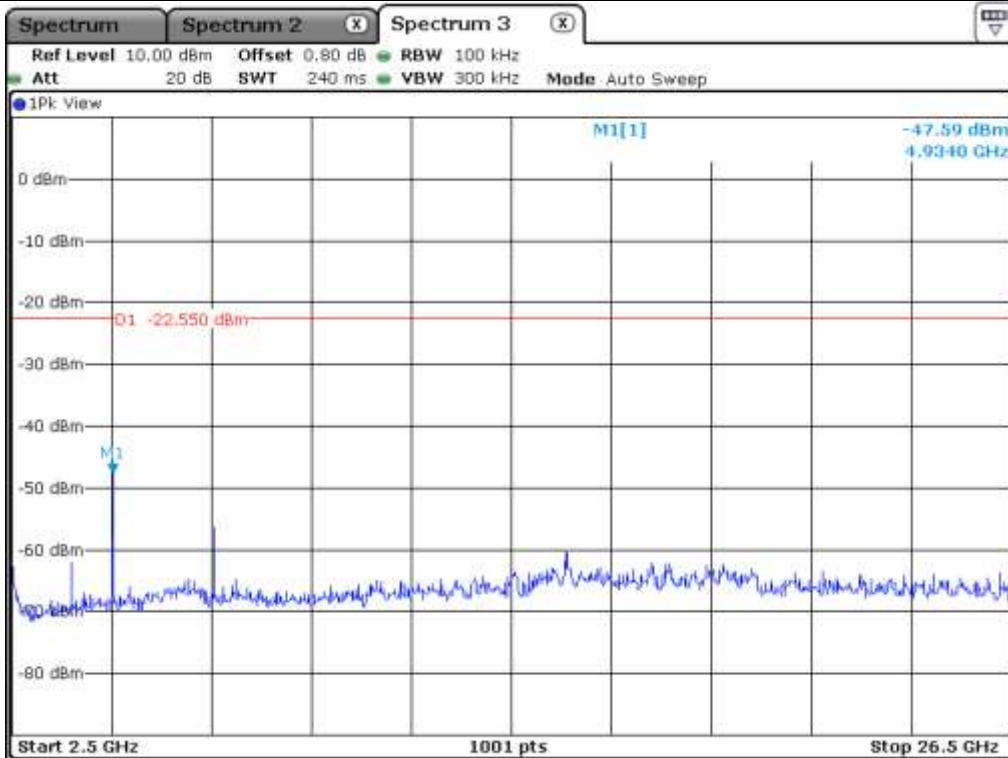


High Channel 11

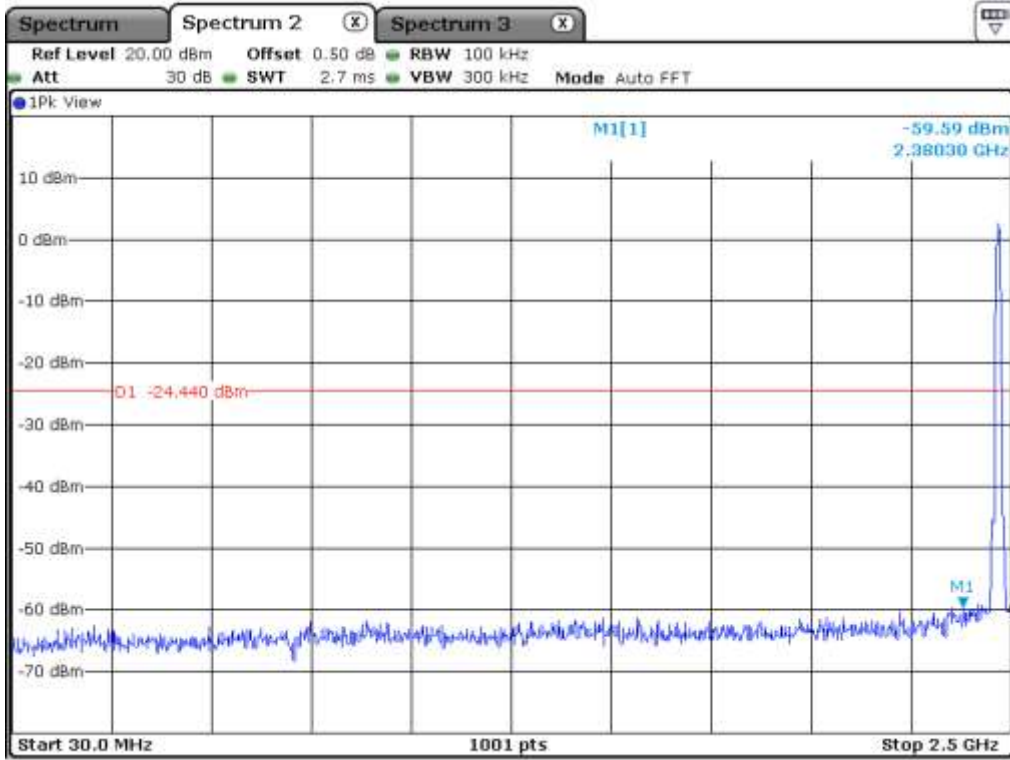


High Channel 12

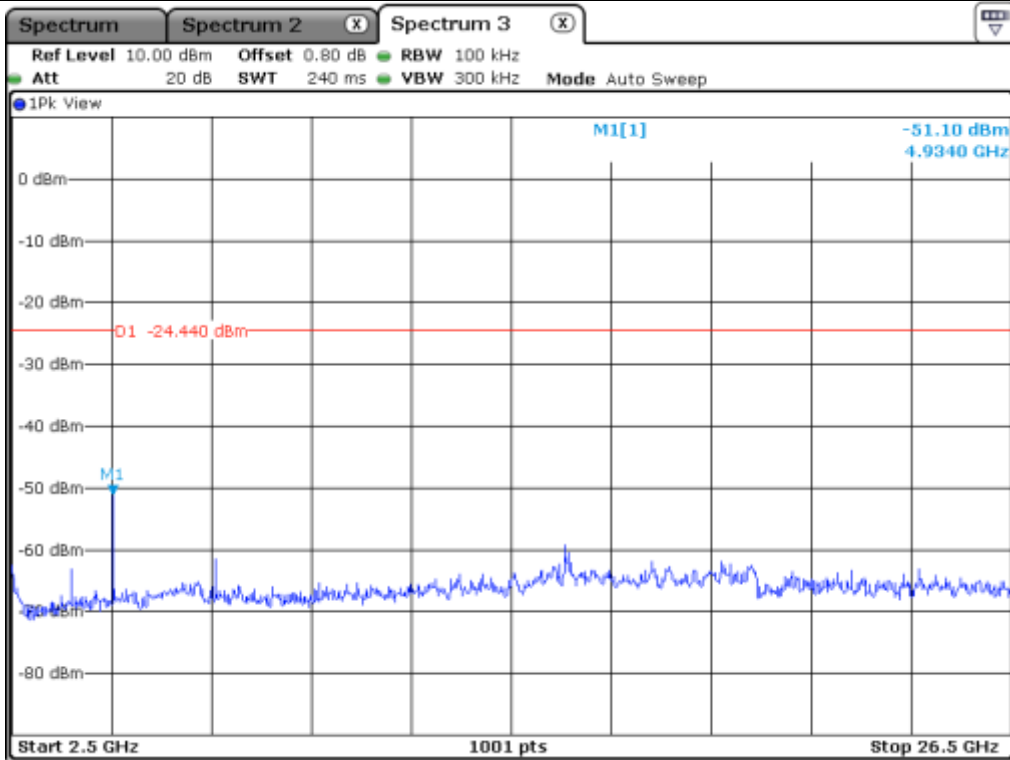

High Channel 12

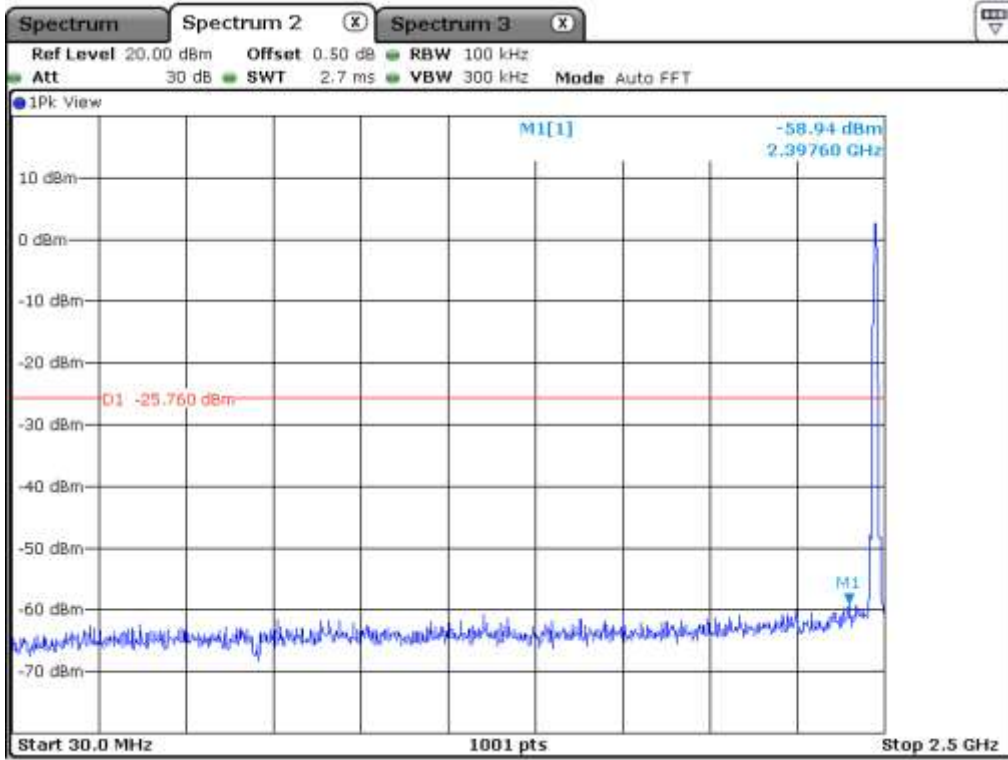

High Channel 13

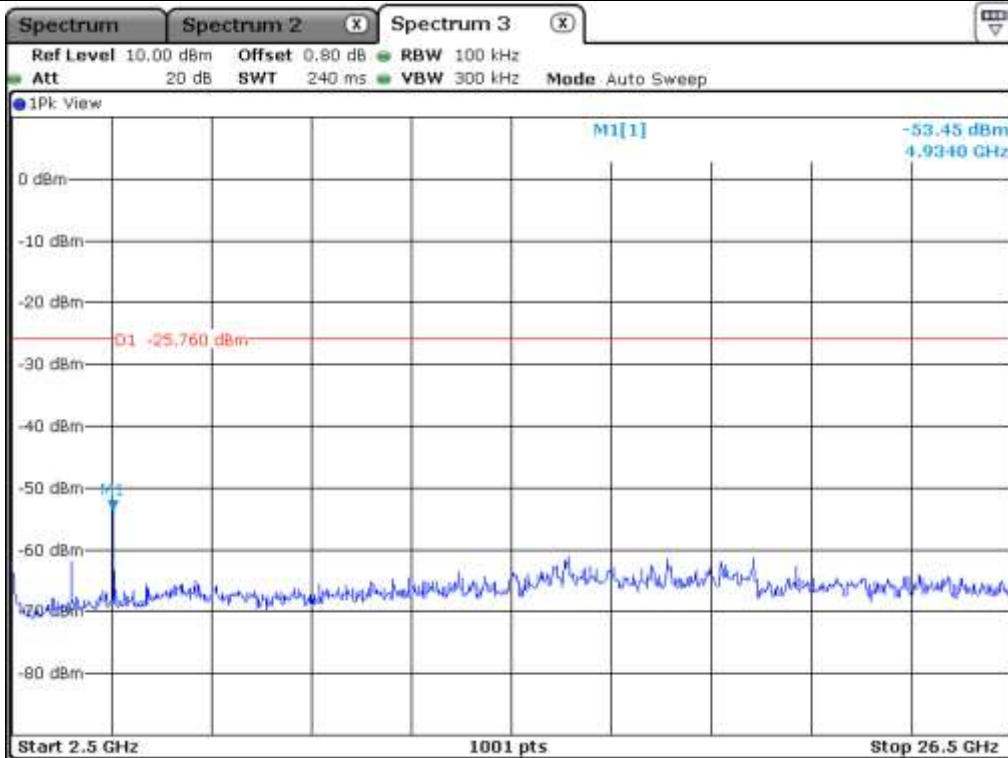


High Channel 13


9.5.1.2 Test data for Antenna 1




Low Channel

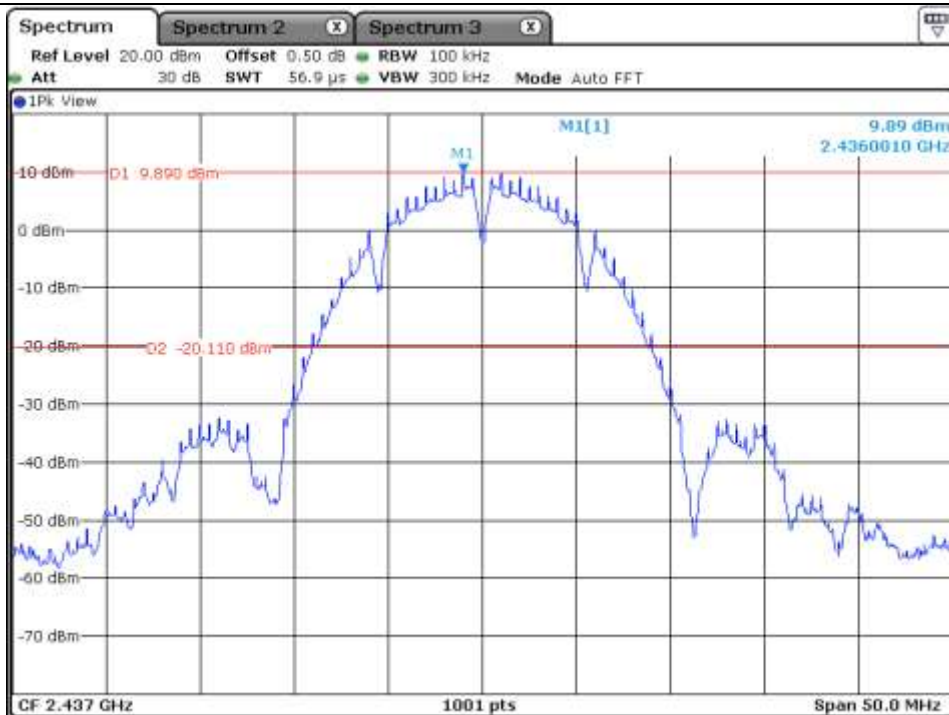


Middle Channel

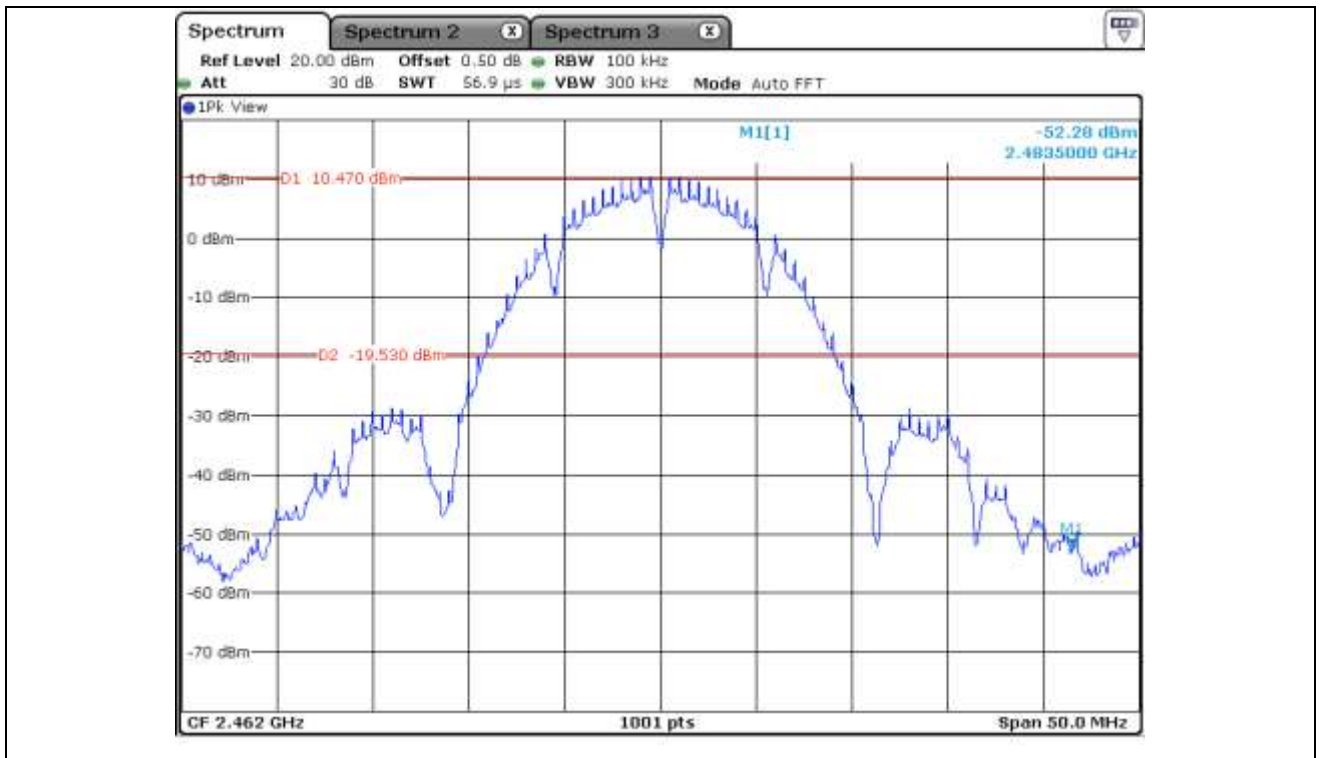


High Channel 11

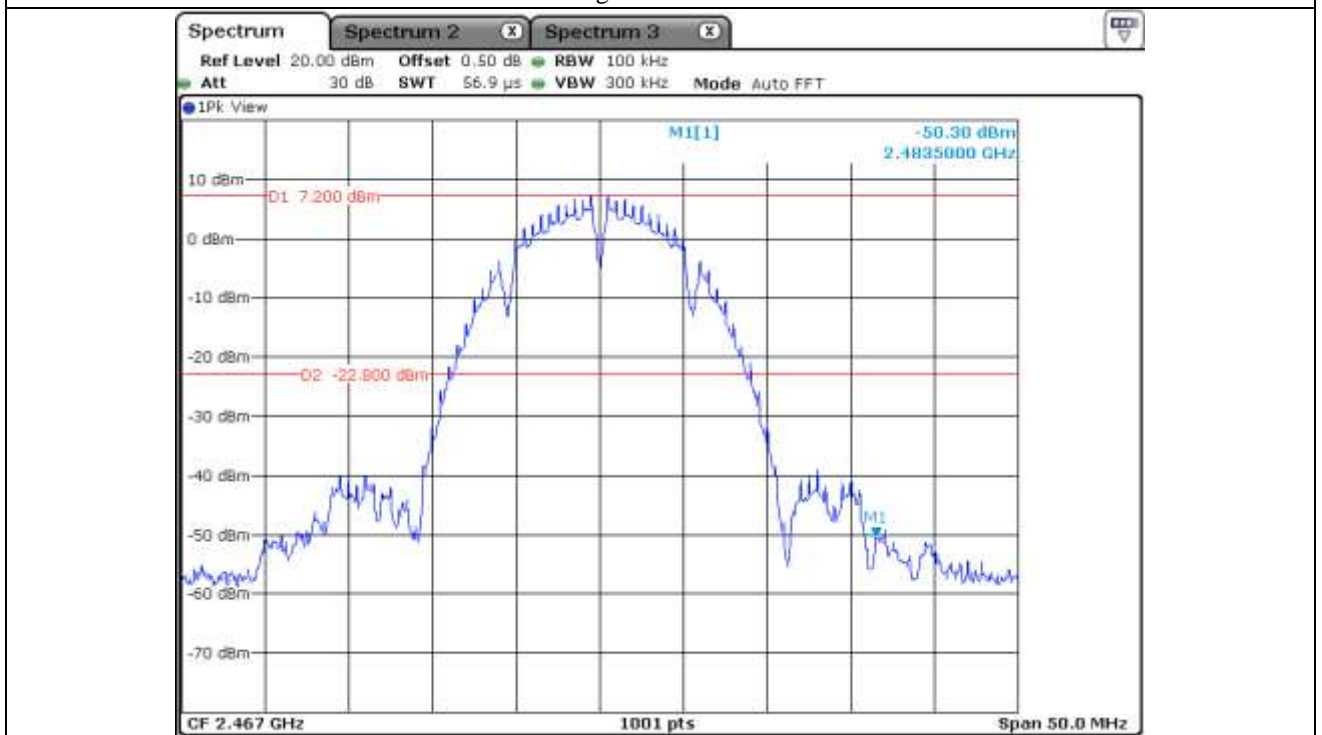


High Channel 12

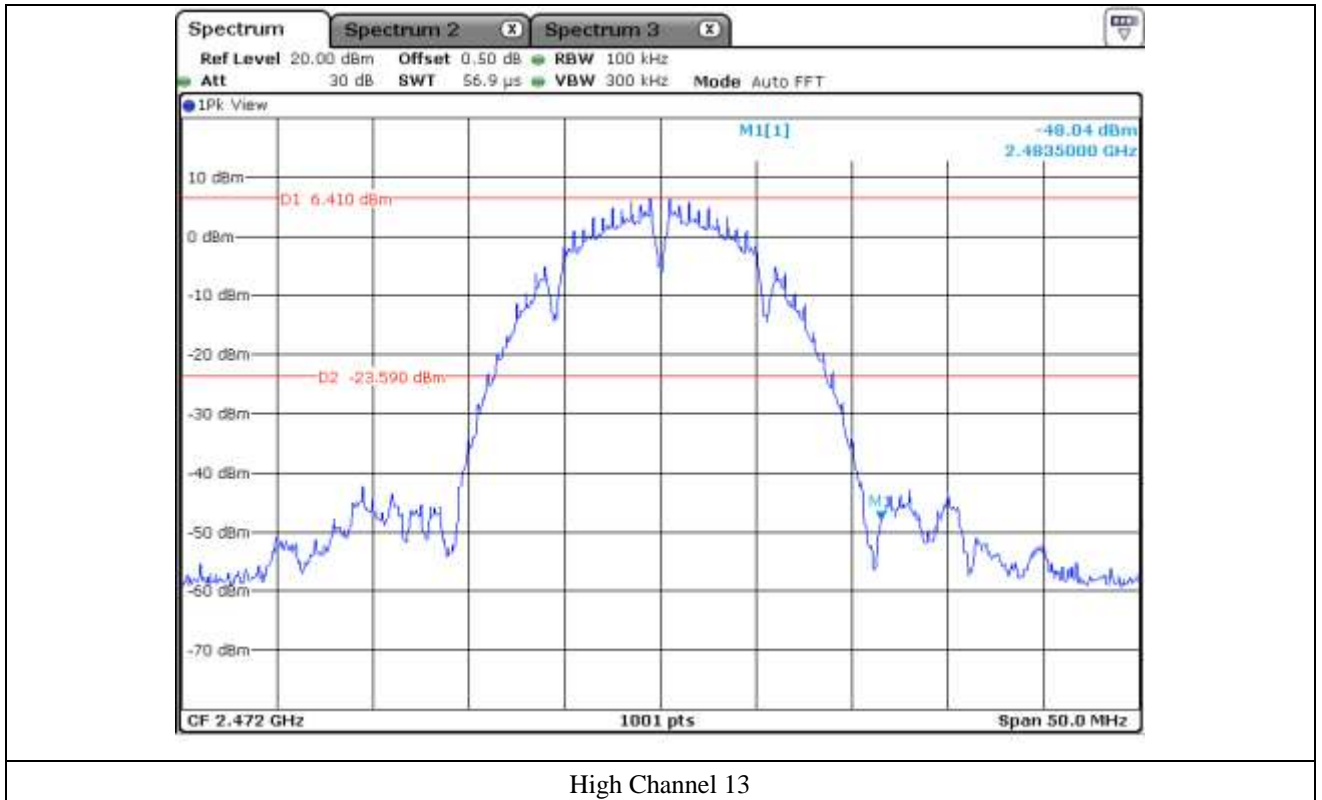


High Channel 13

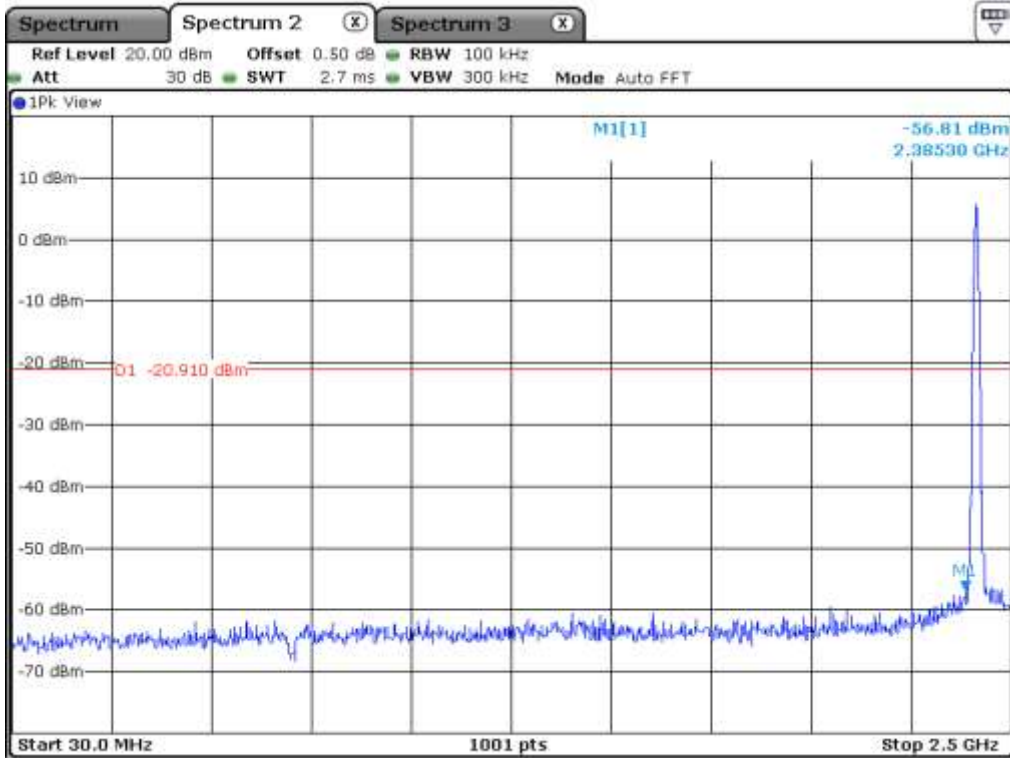


Low Channel

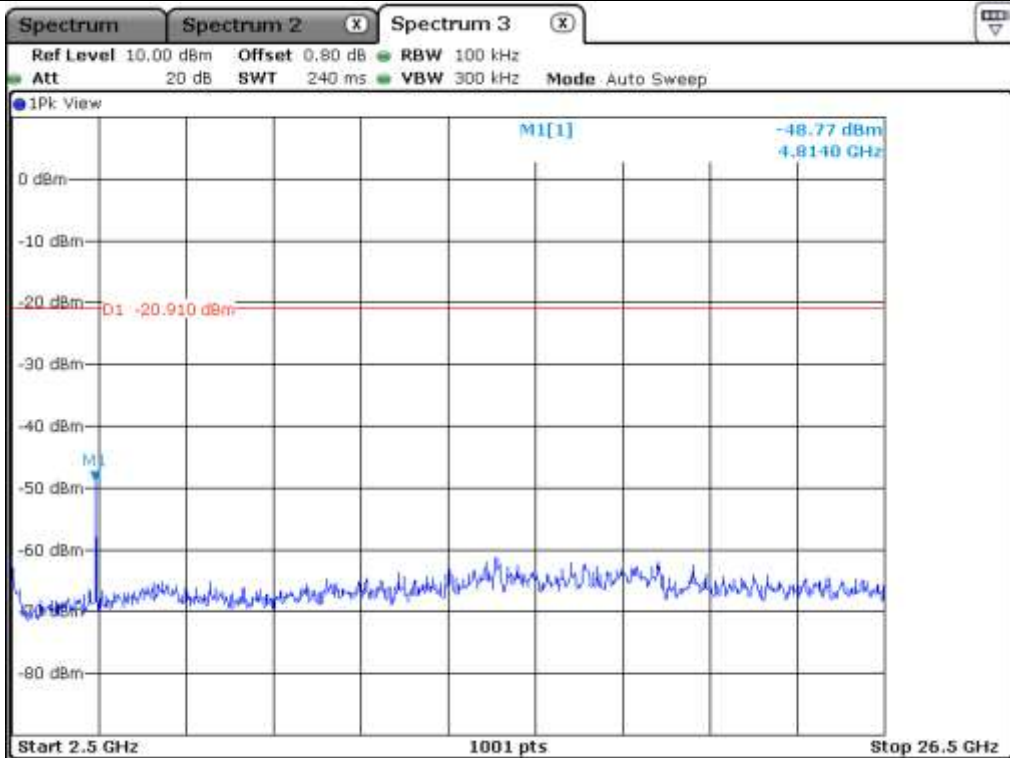


Low Channel

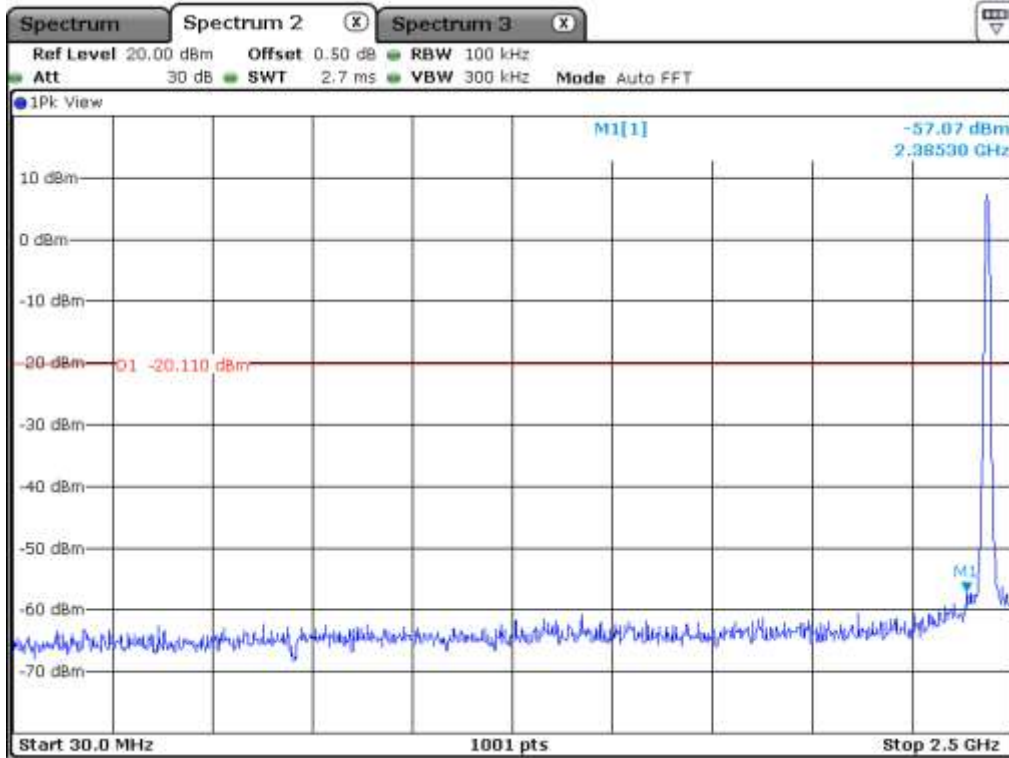


Middle Channel

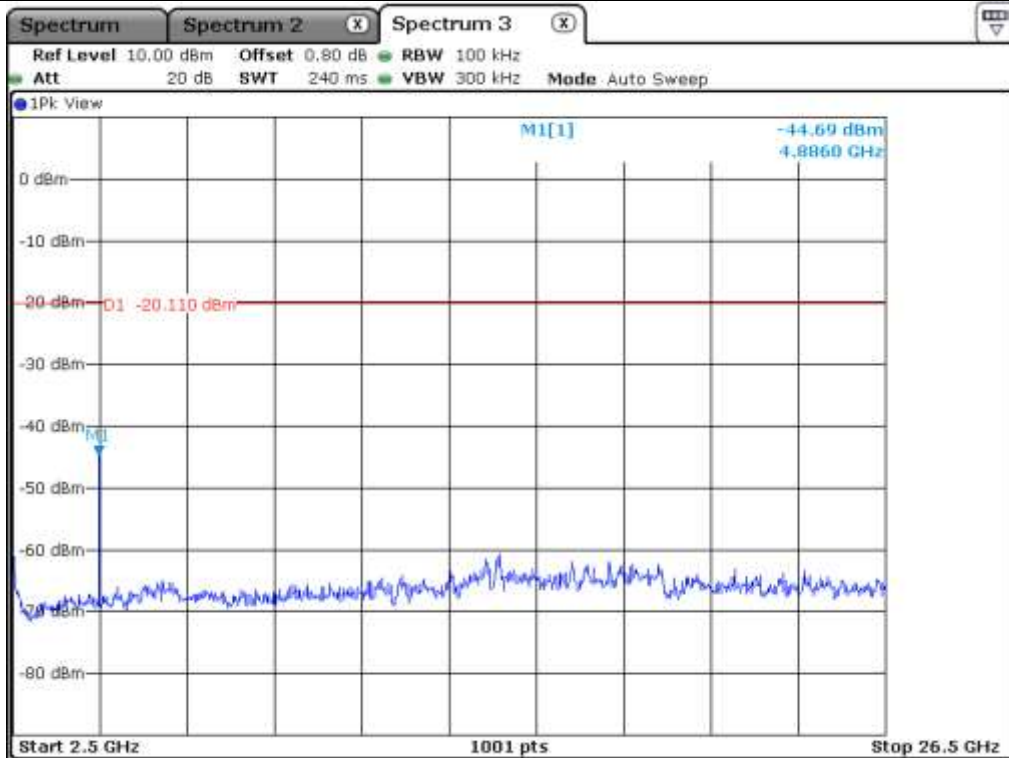


Middle Channel

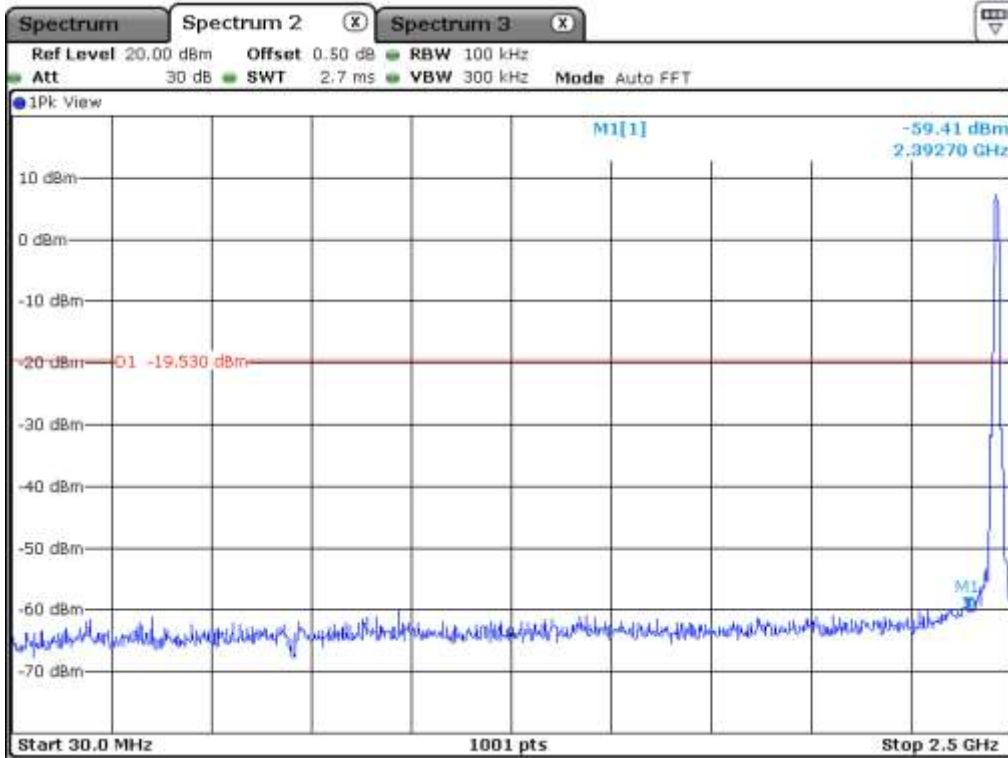


High Channel 11

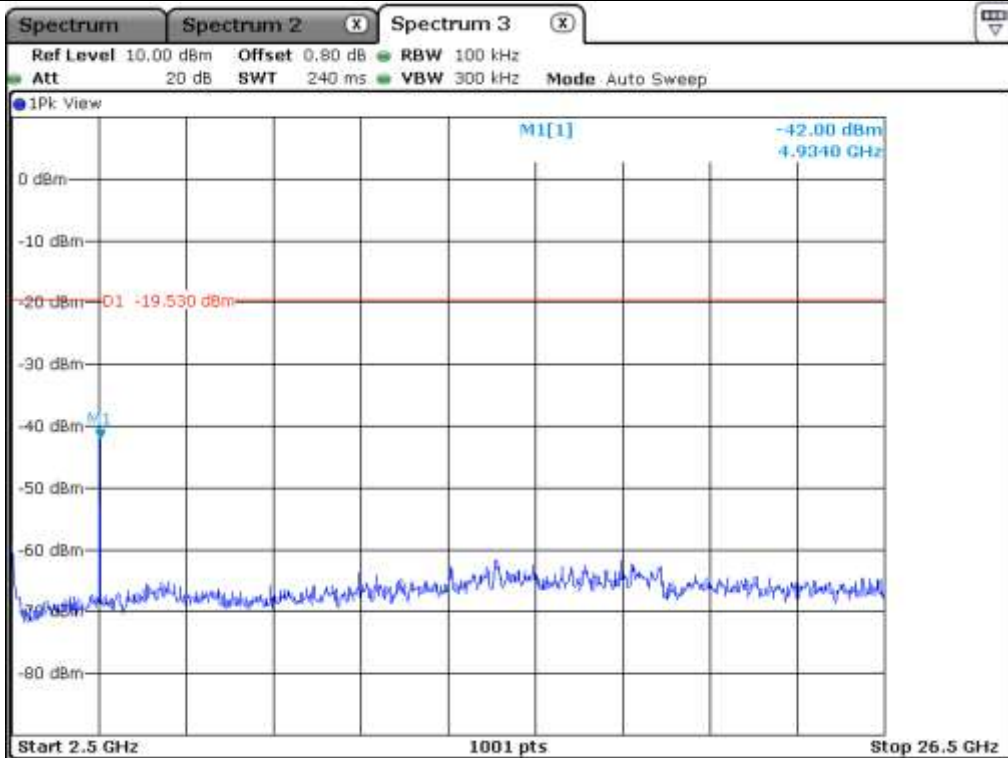


High Channel 11

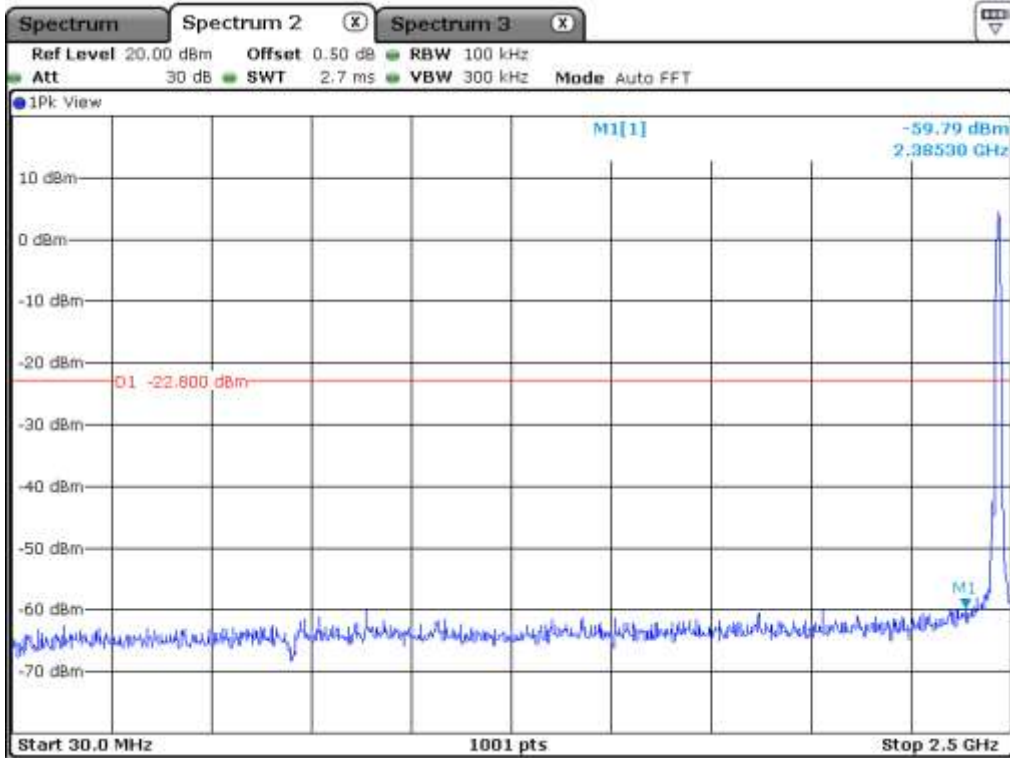


High Channel 12

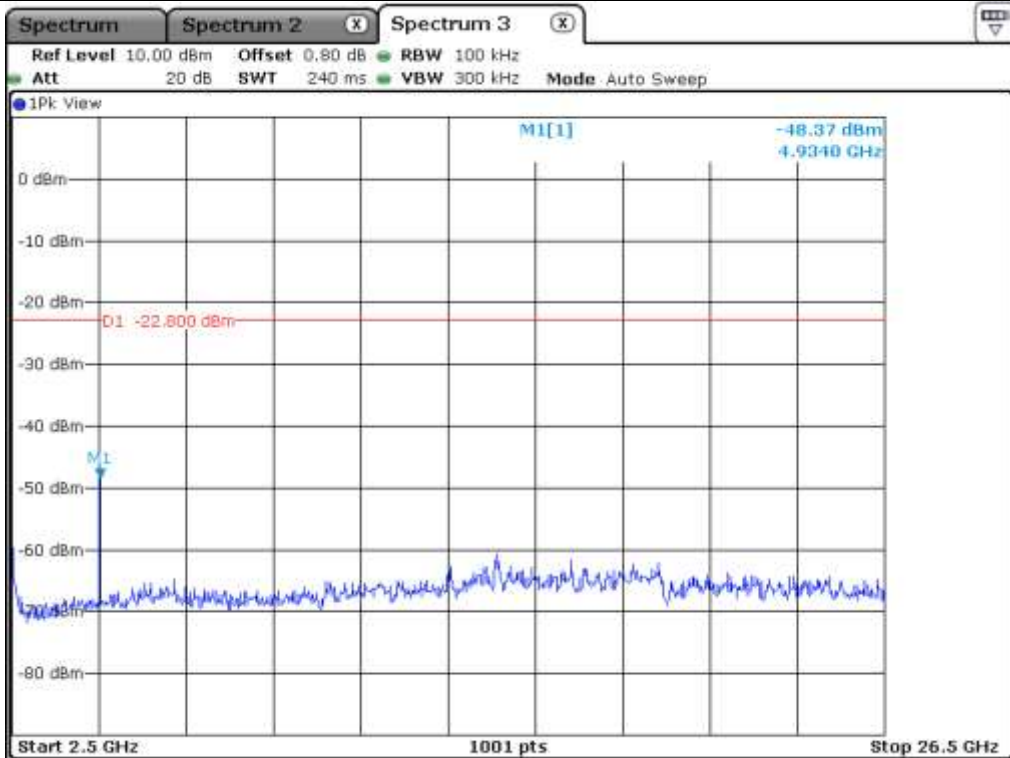

High Channel 12

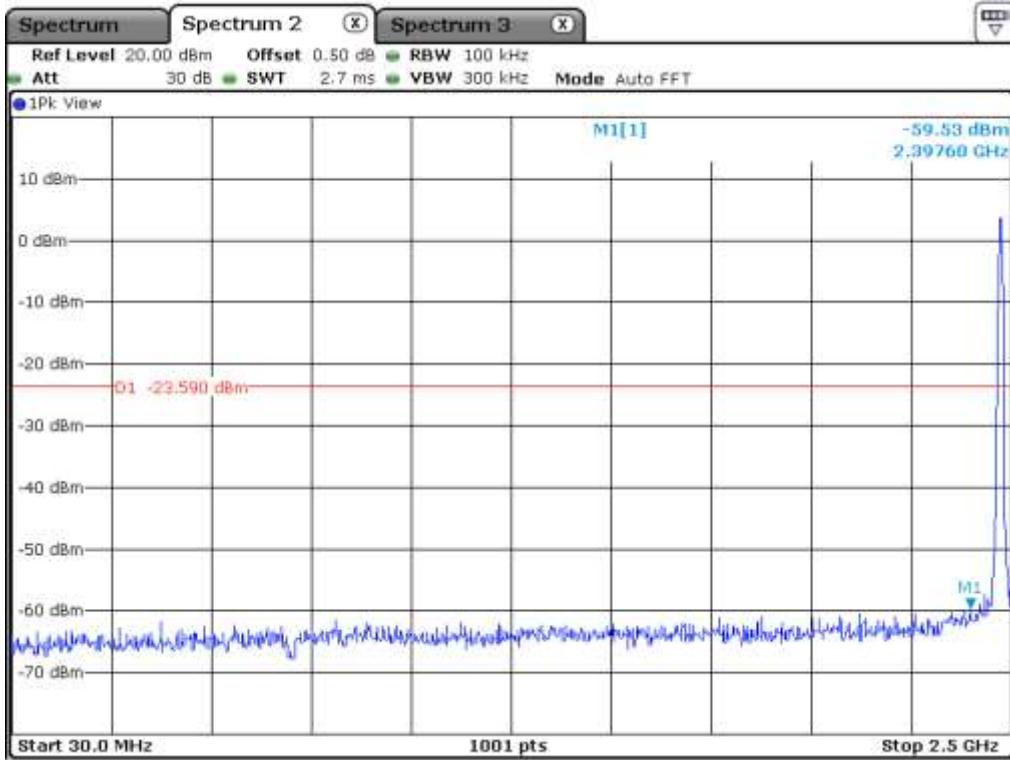


High Channel 13

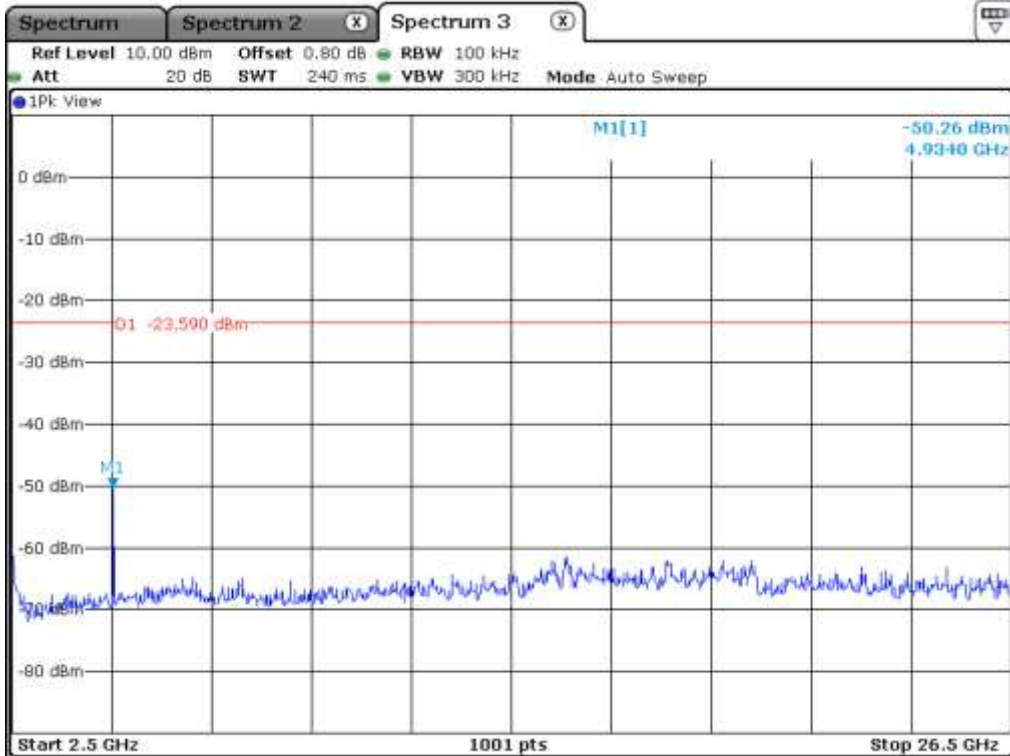


High Channel 13

9.5.2 Test data for 802.11g WLAN Mode


9.5.2.1 Test data for Antenna 0

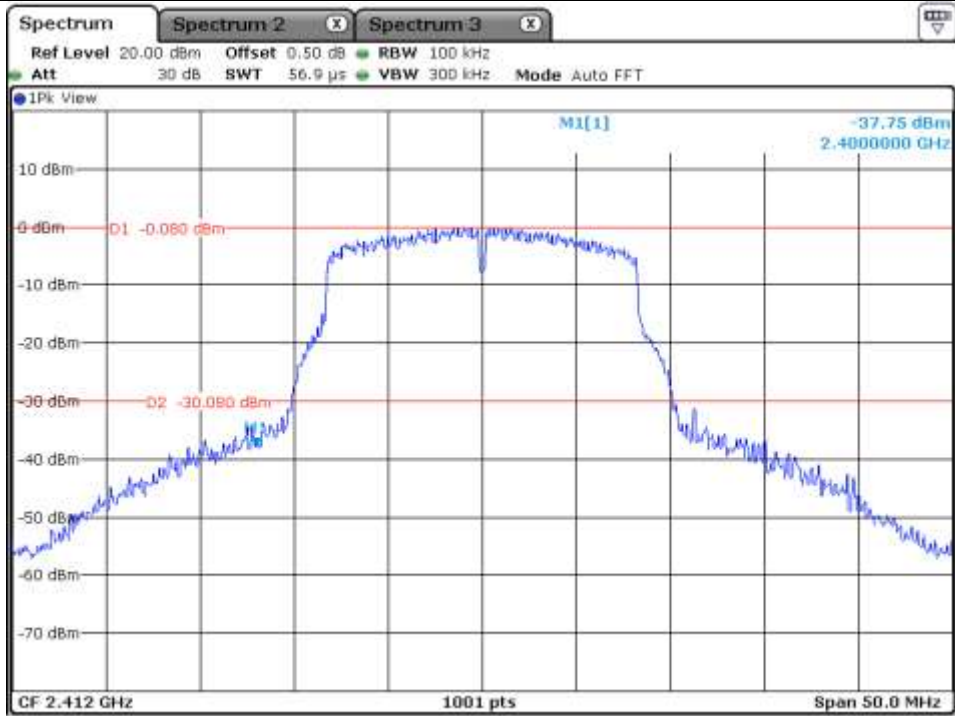


Low Channel

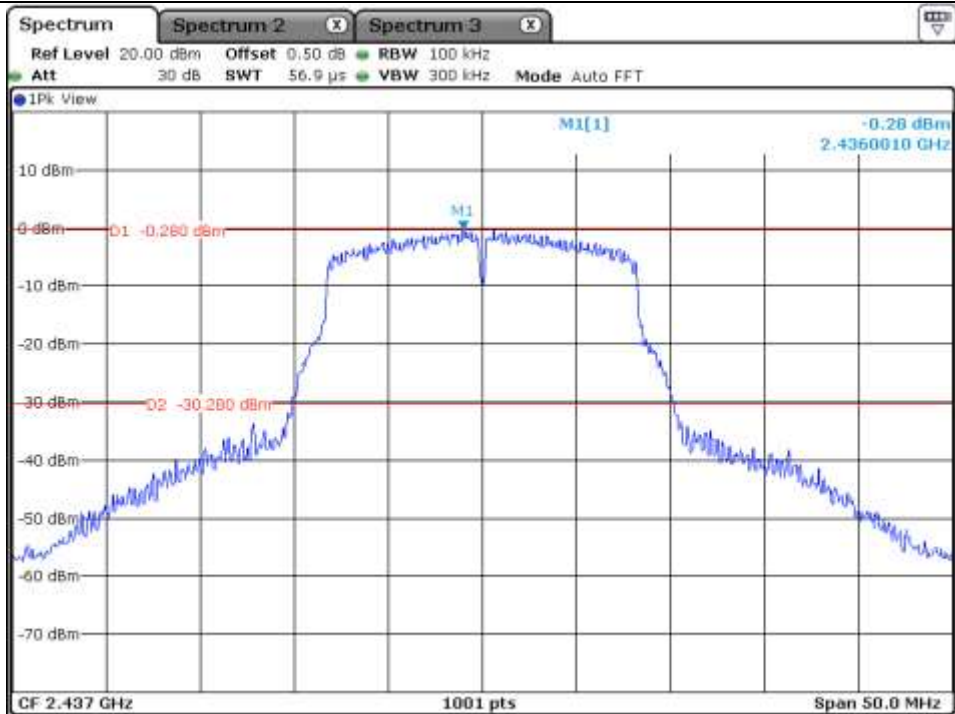


Middle Channel

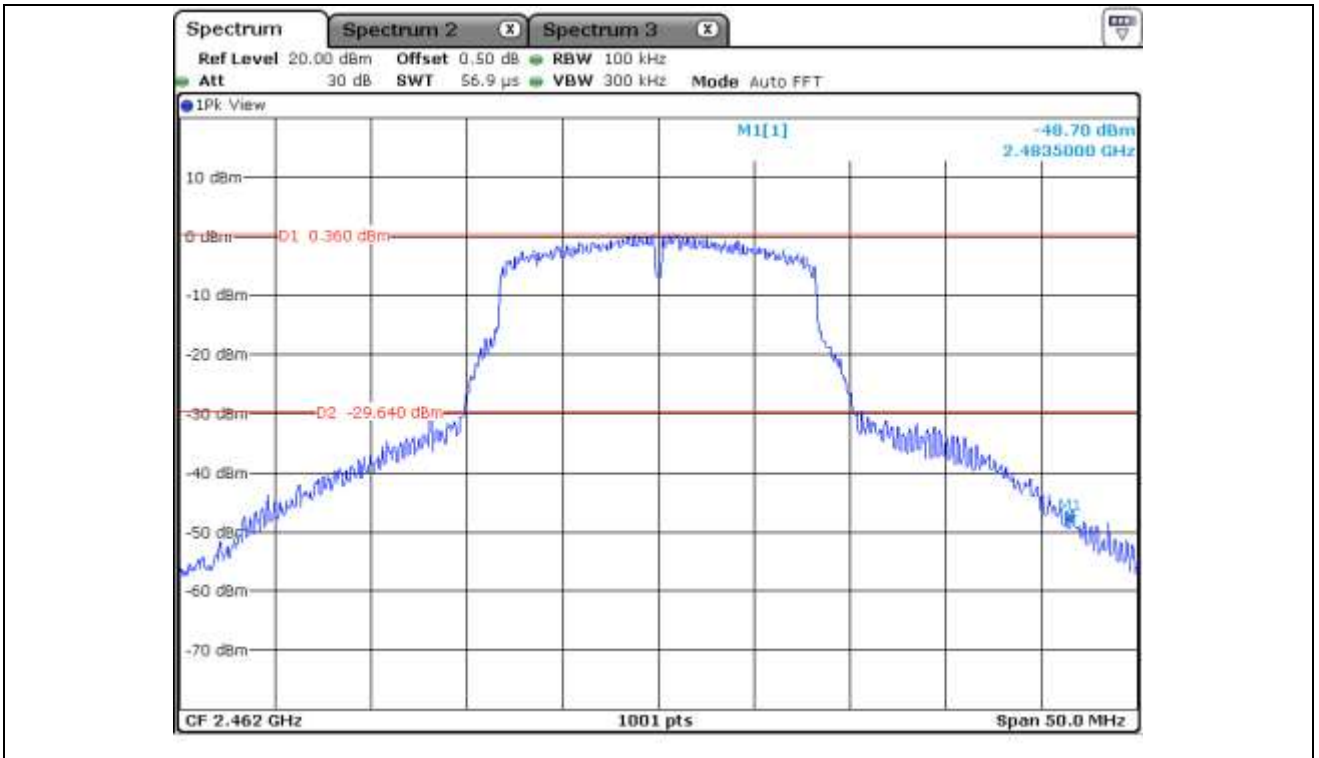


High Channel 11

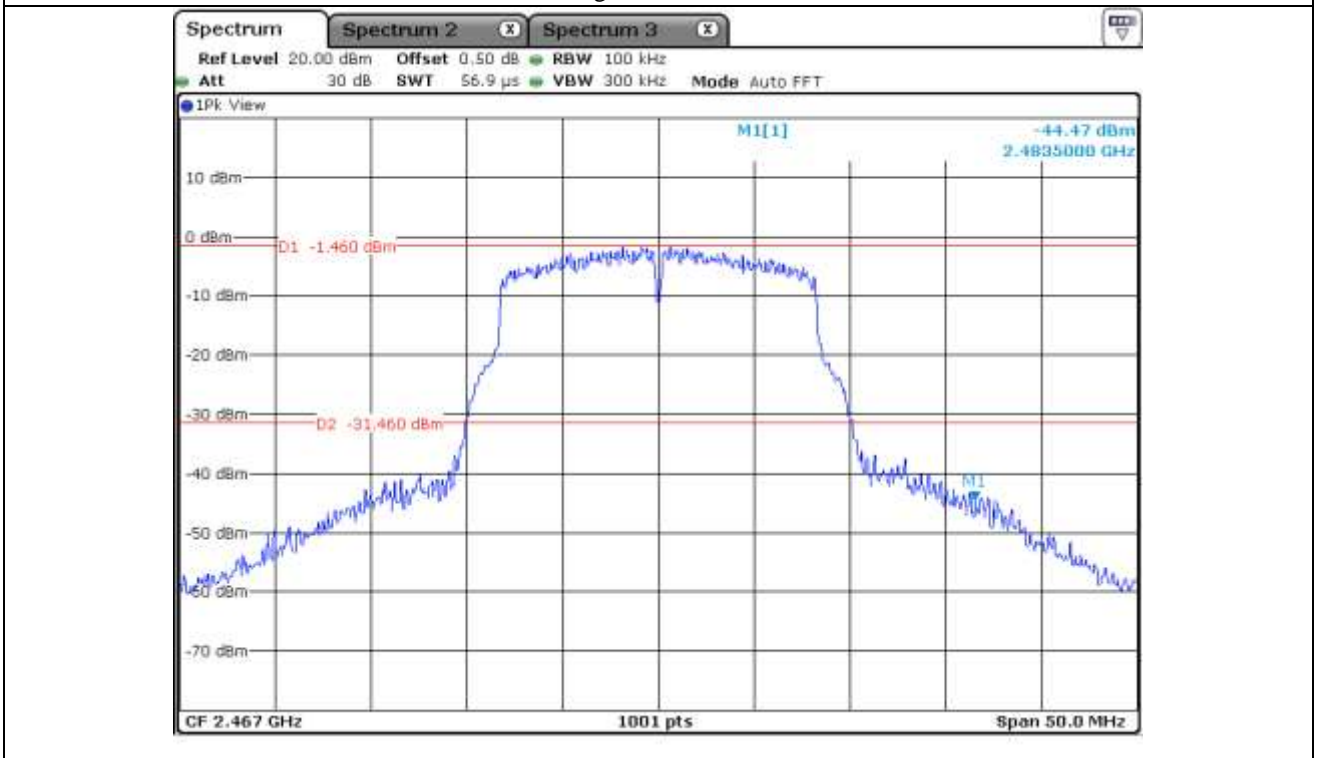


High Channel 12

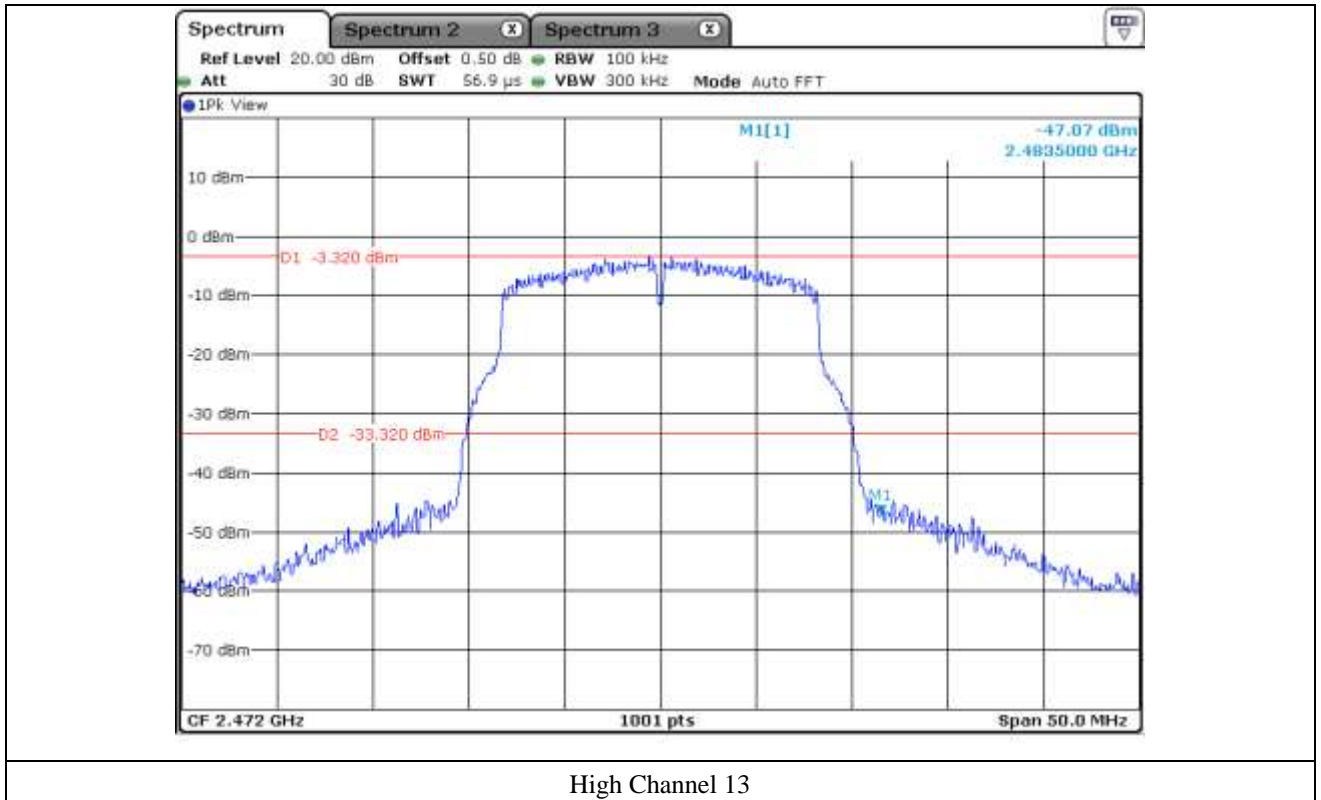


High Channel 13

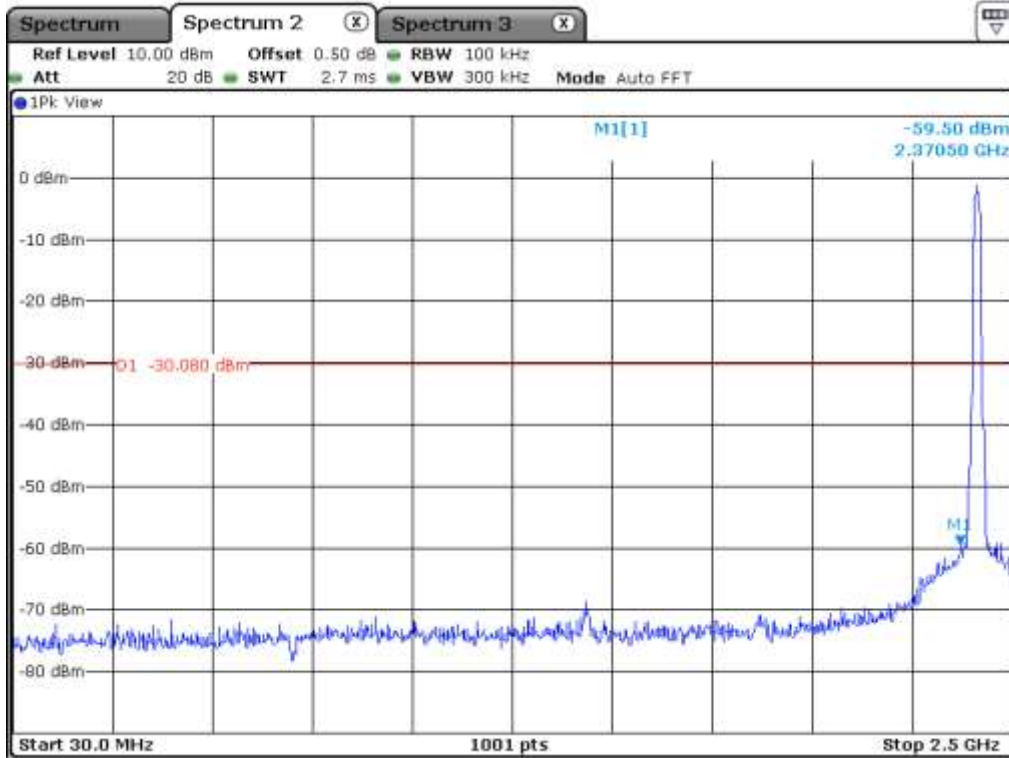


Low Channel

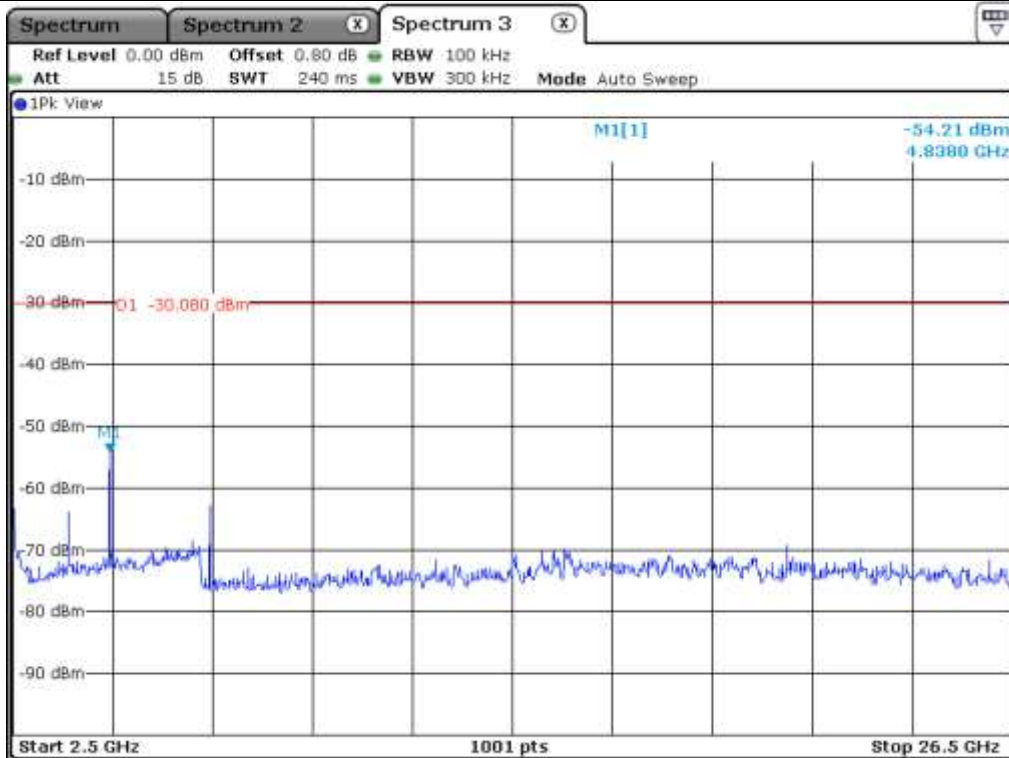


Low Channel

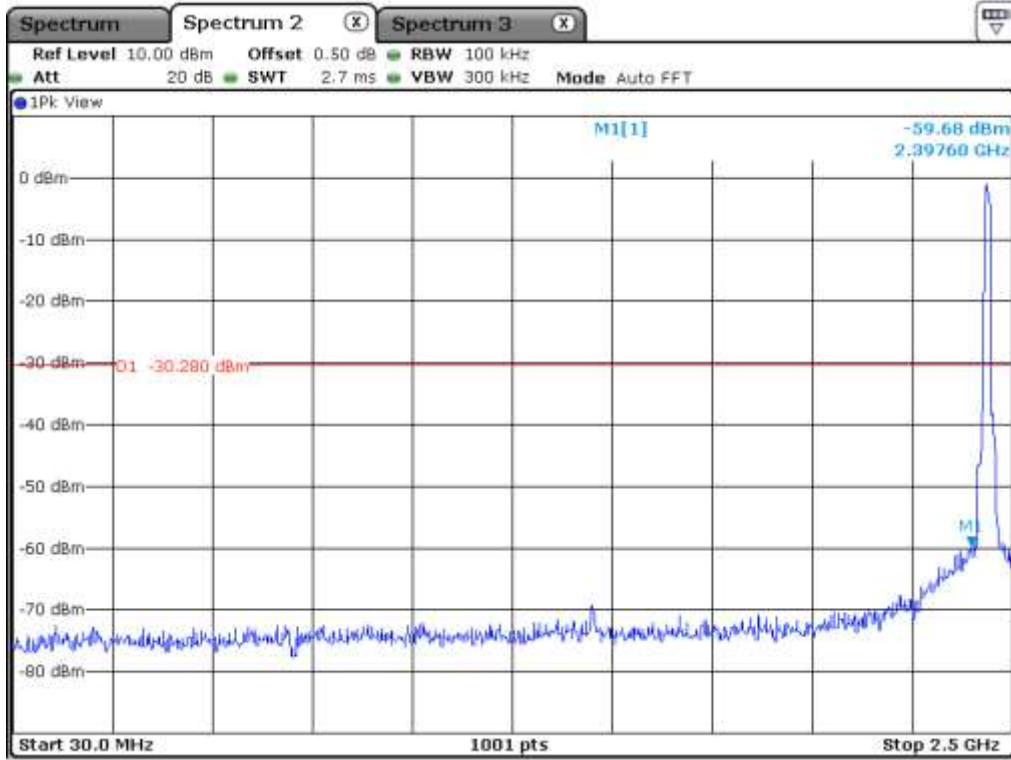


Middle Channel

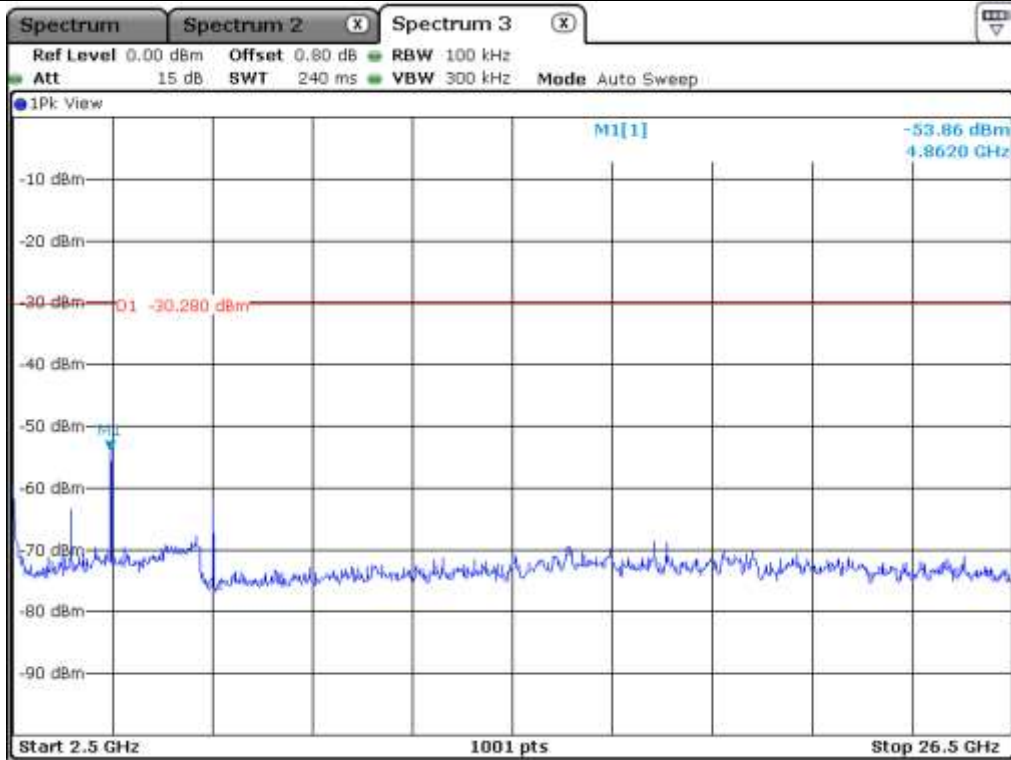


Middle Channel

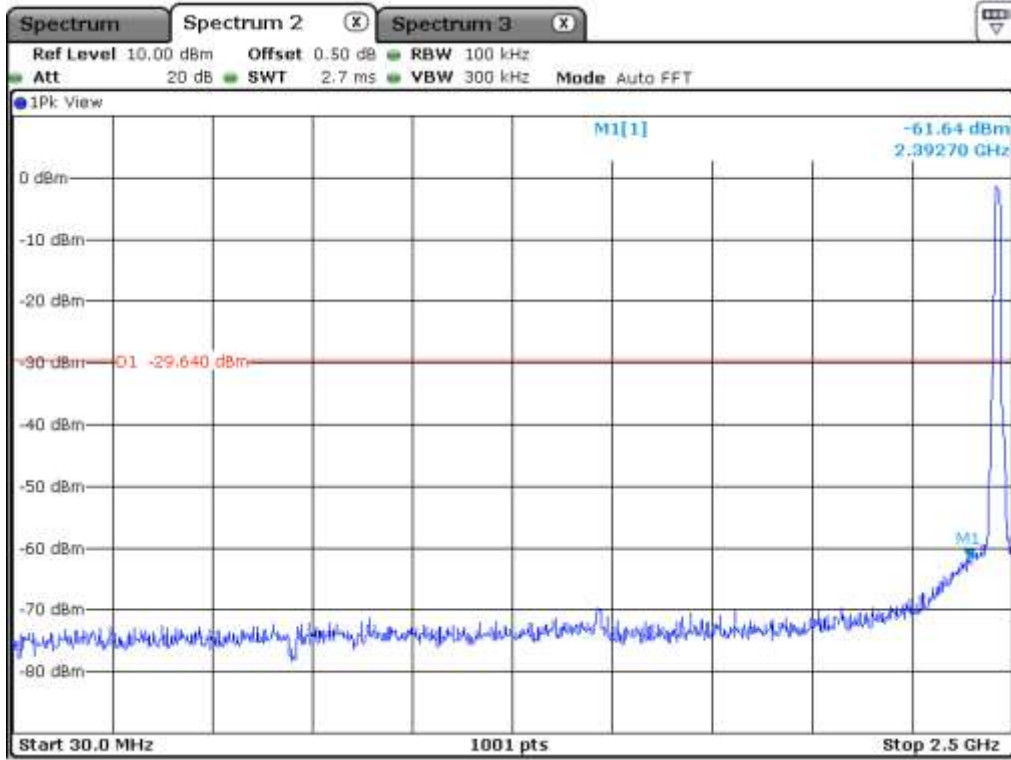


High Channel 11

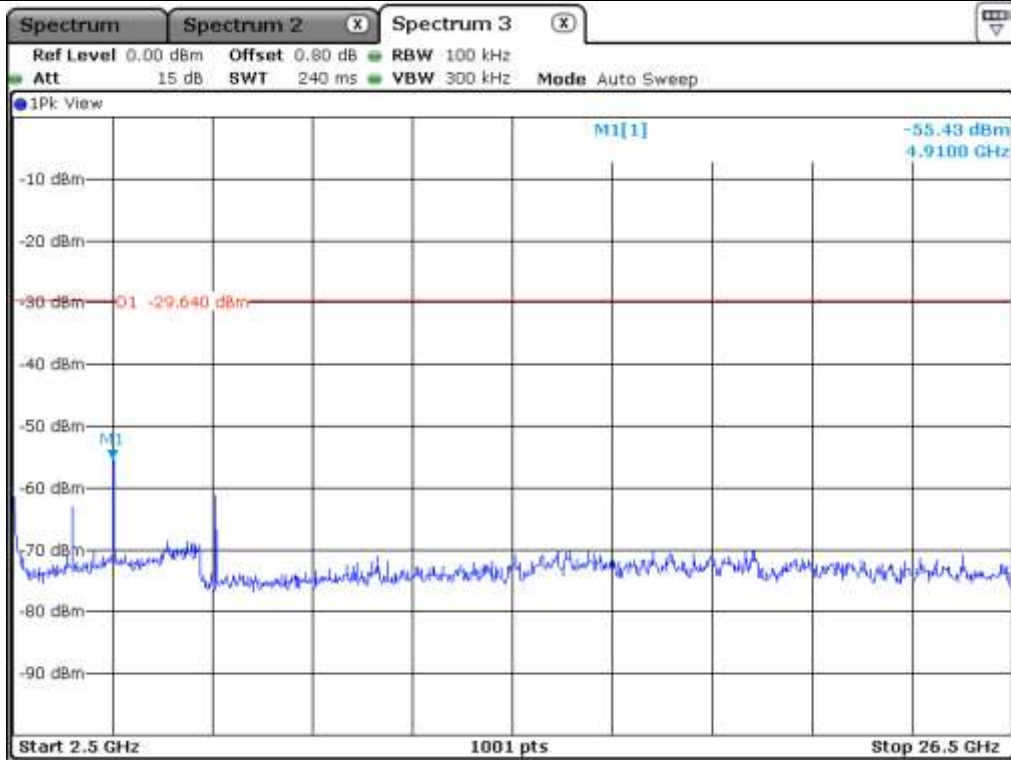


High Channel 11

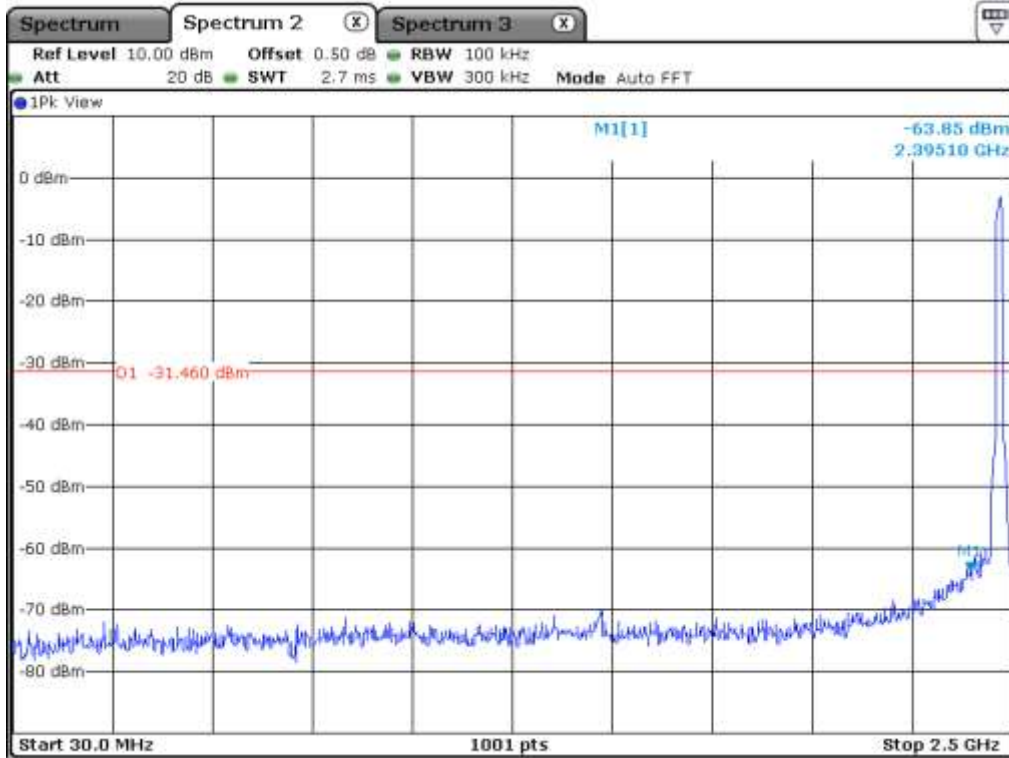


High Channel 12

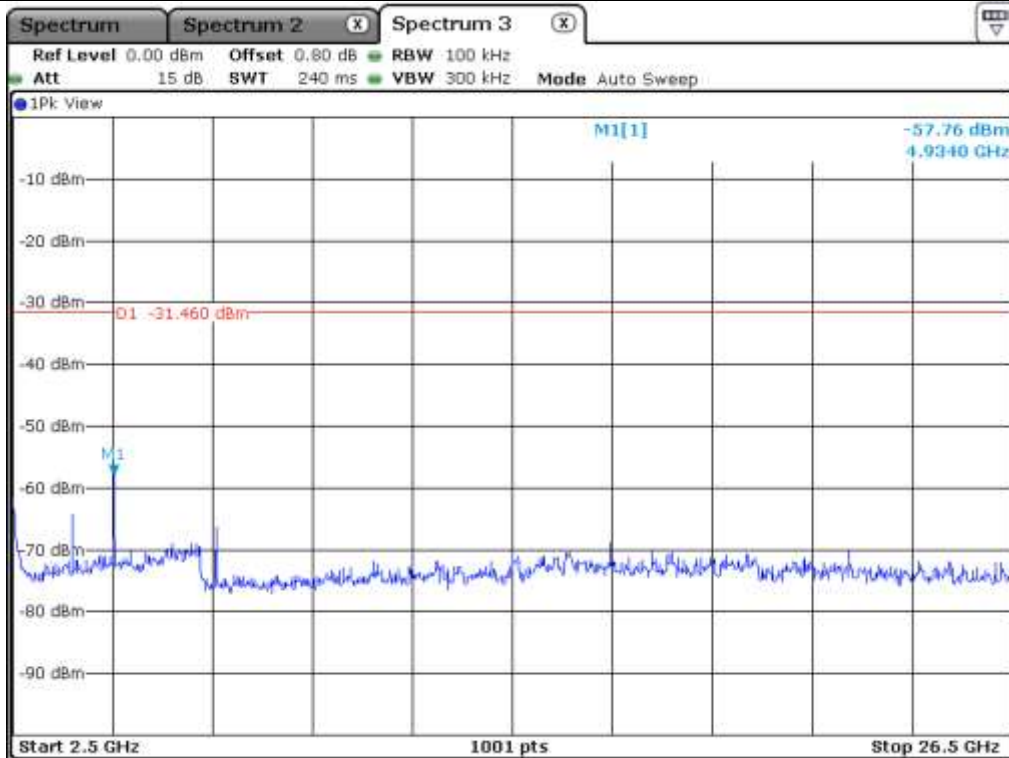

High Channel 12

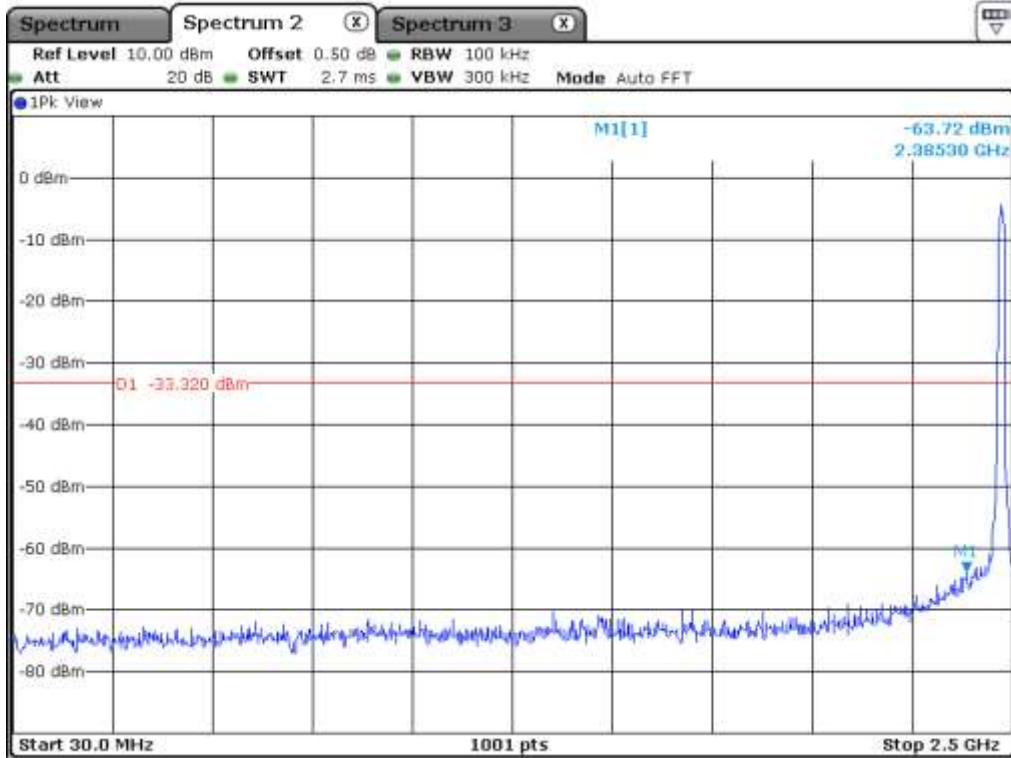


High Channel 13

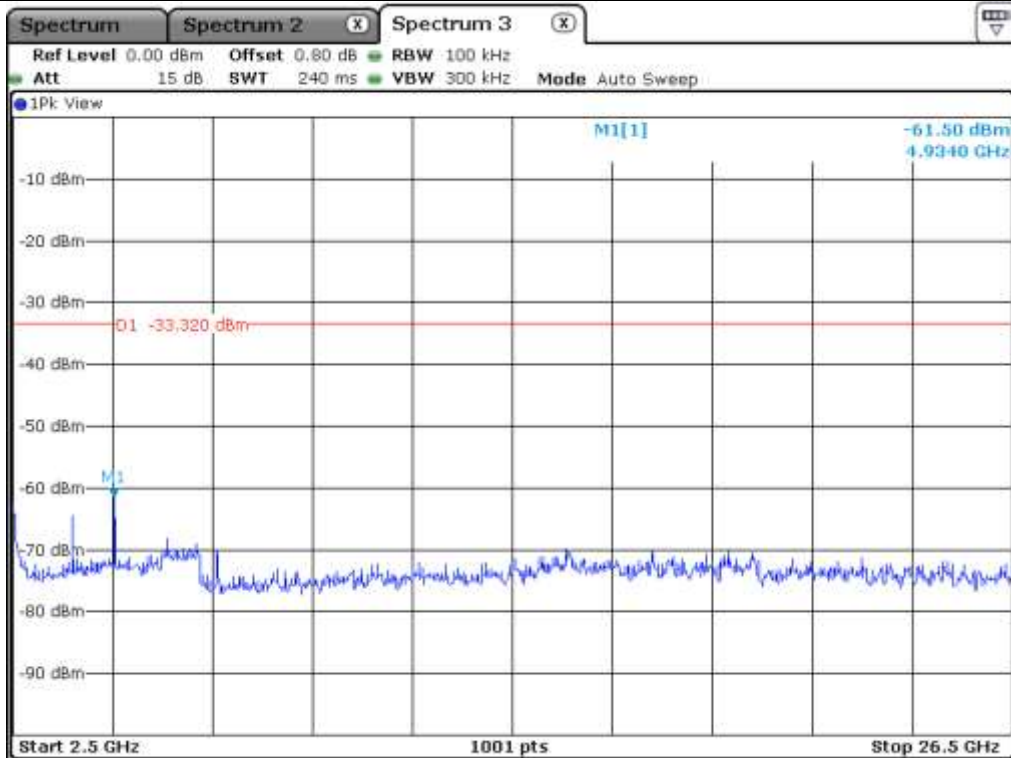


High Channel 13


9.5.2.2 Test data for Antenna 1

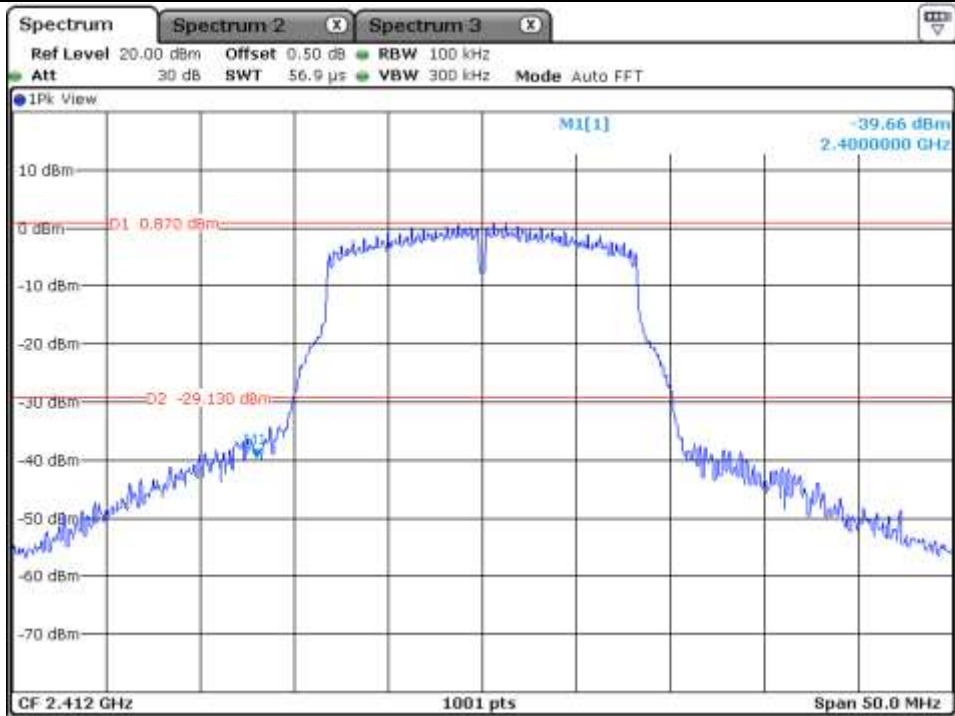


Low Channel

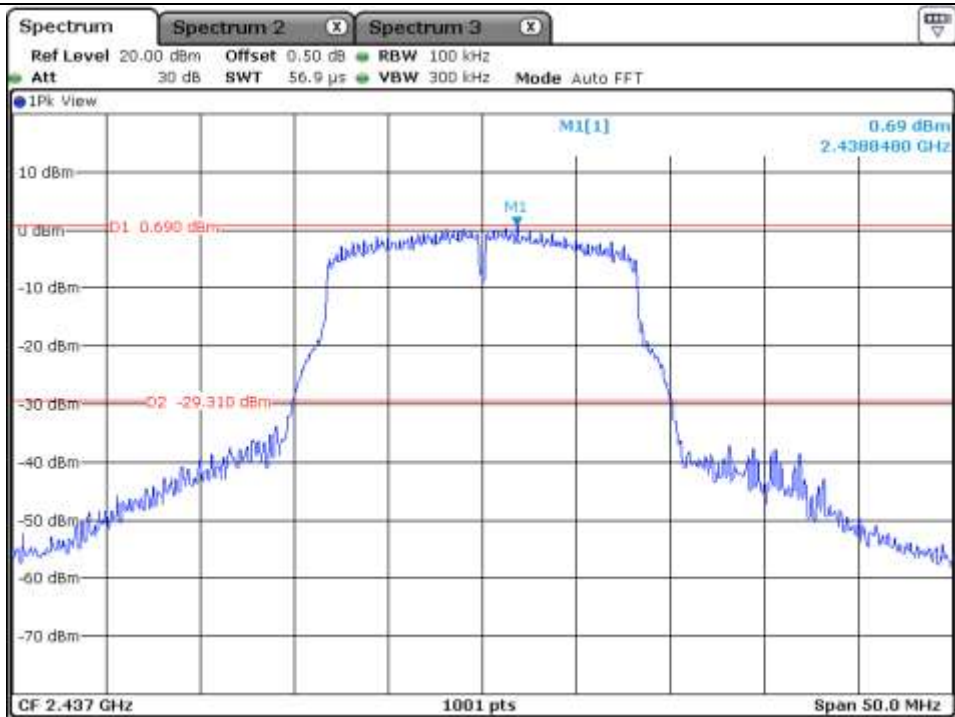


Middle Channel

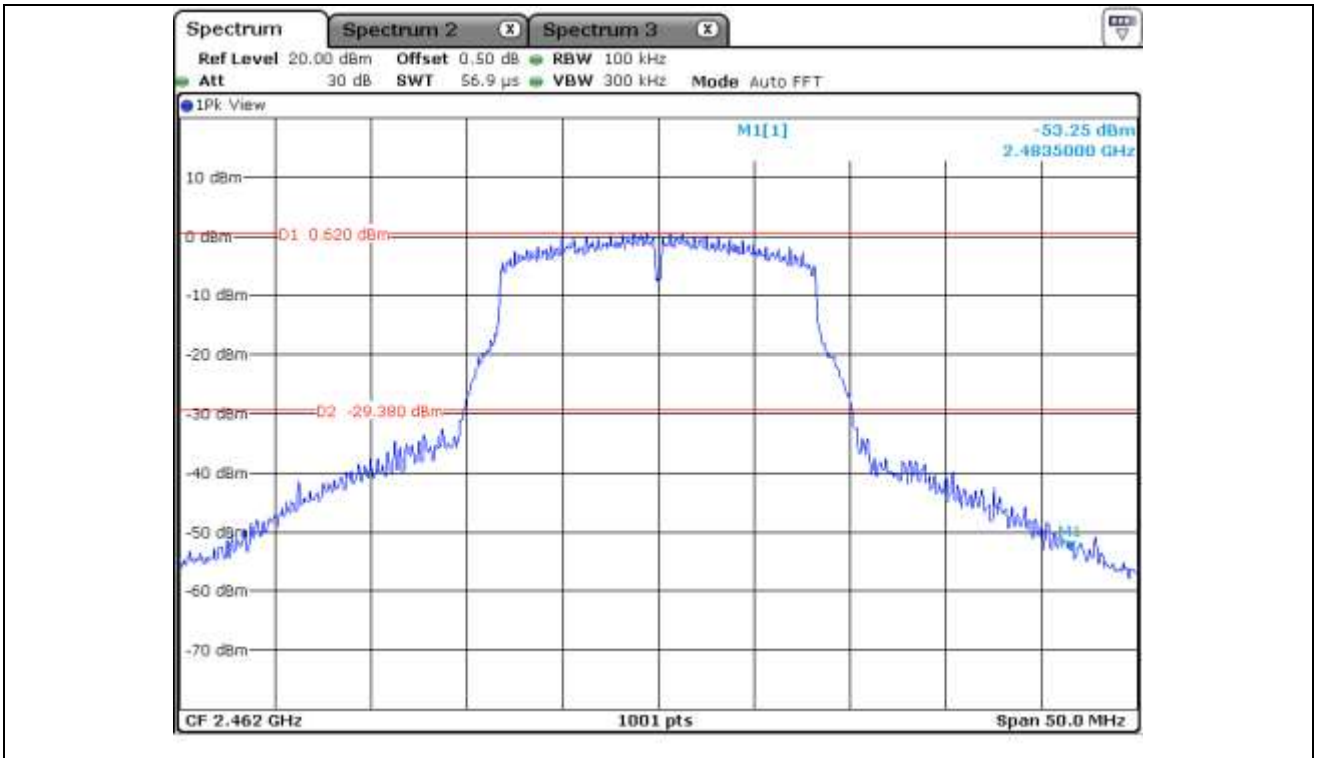


High Channel 11

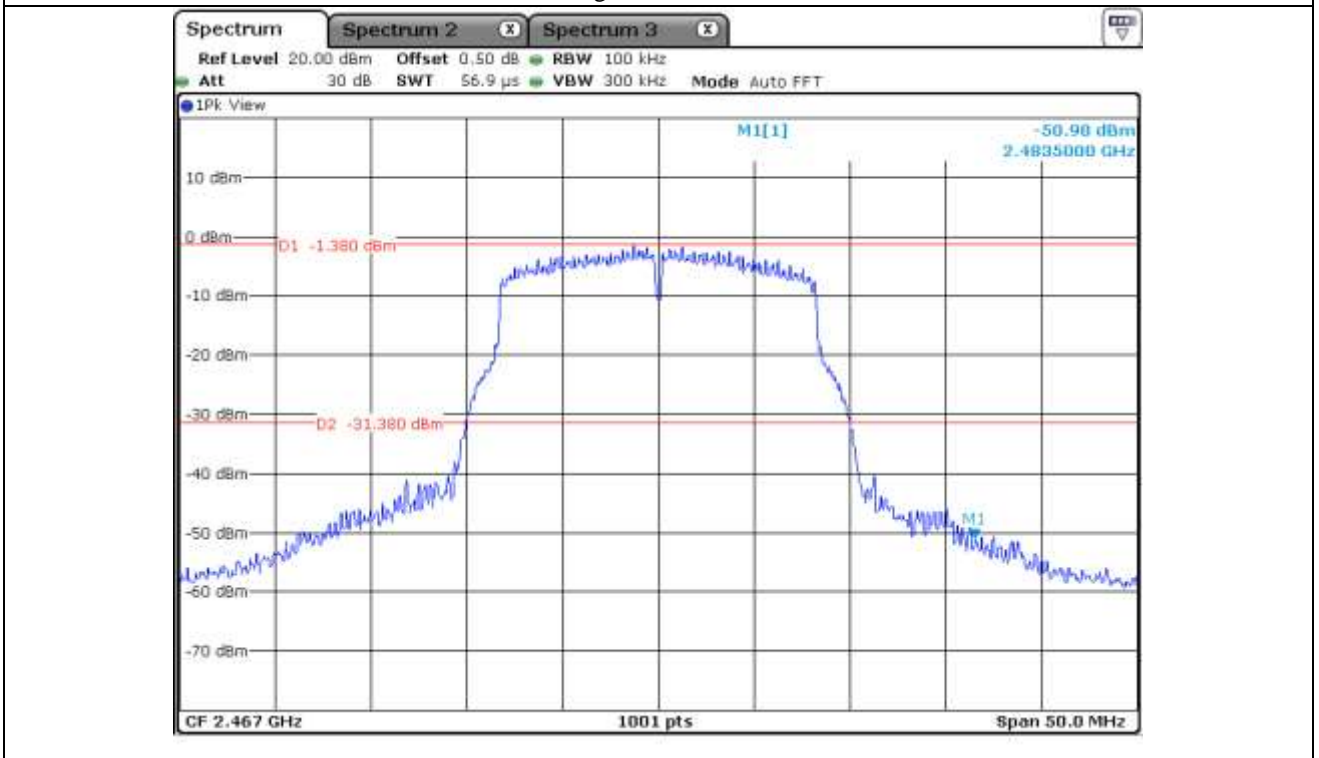


High Channel 12

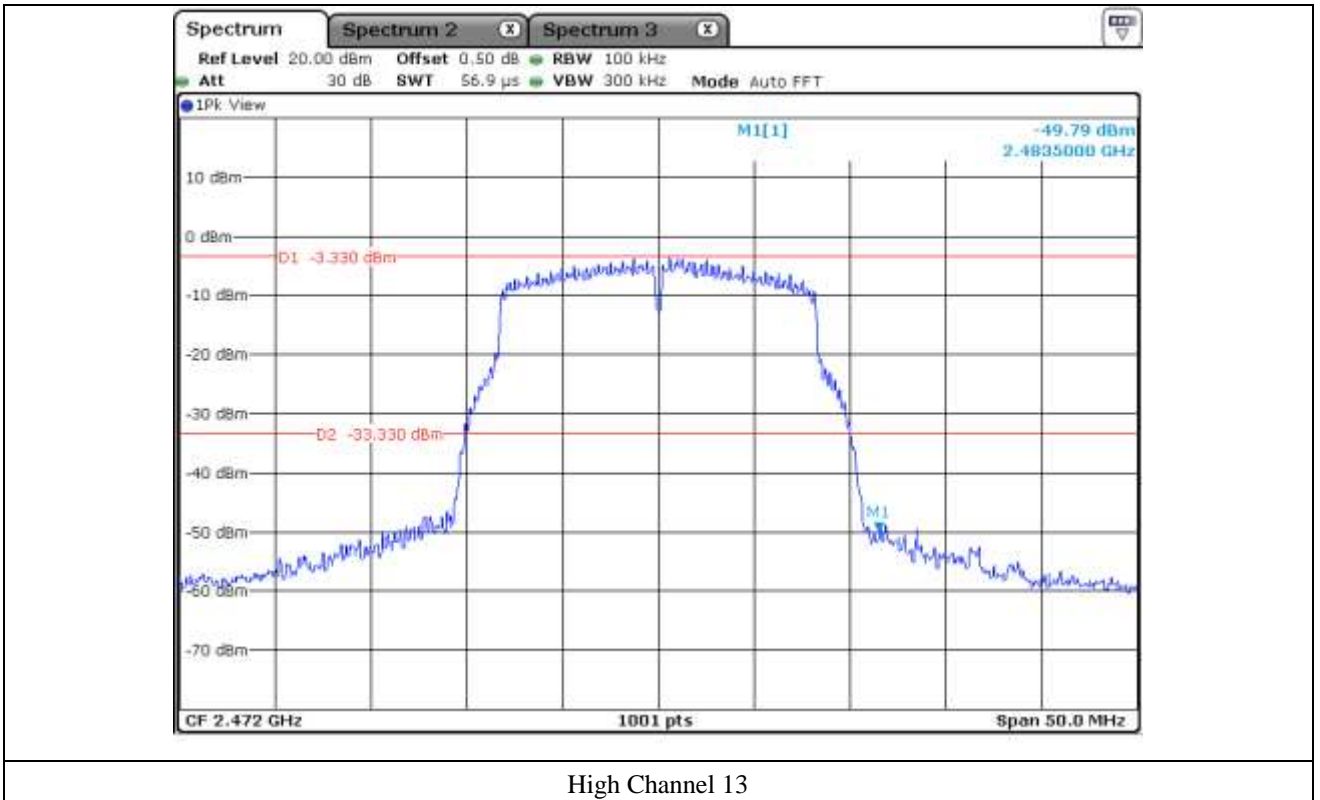


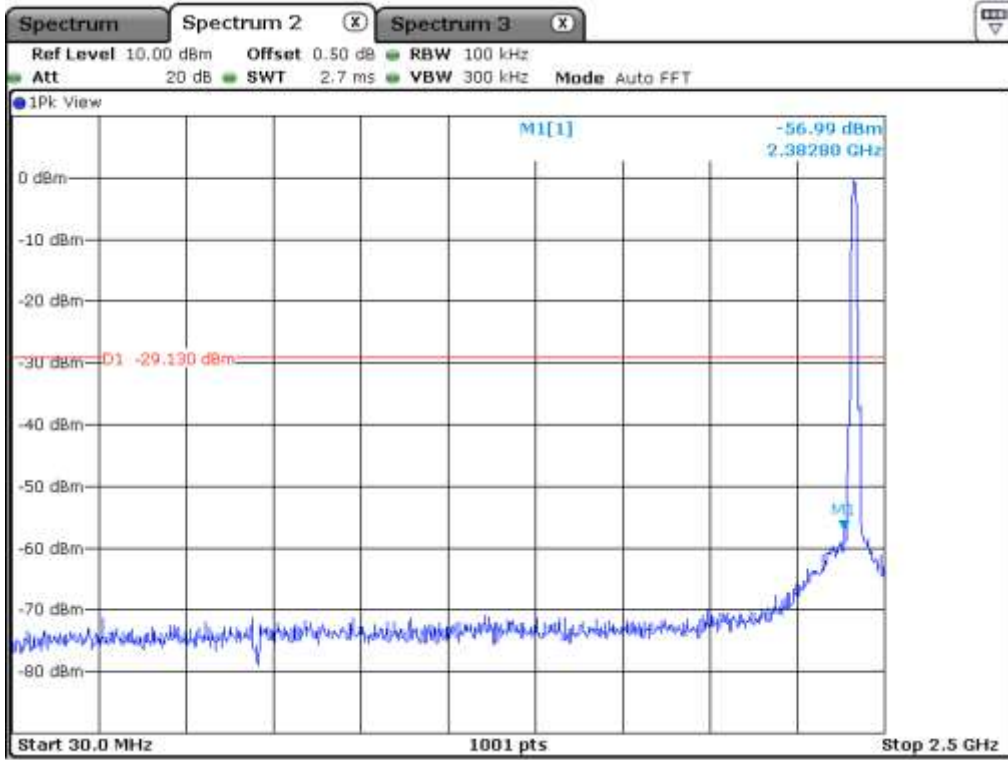


Low Channel

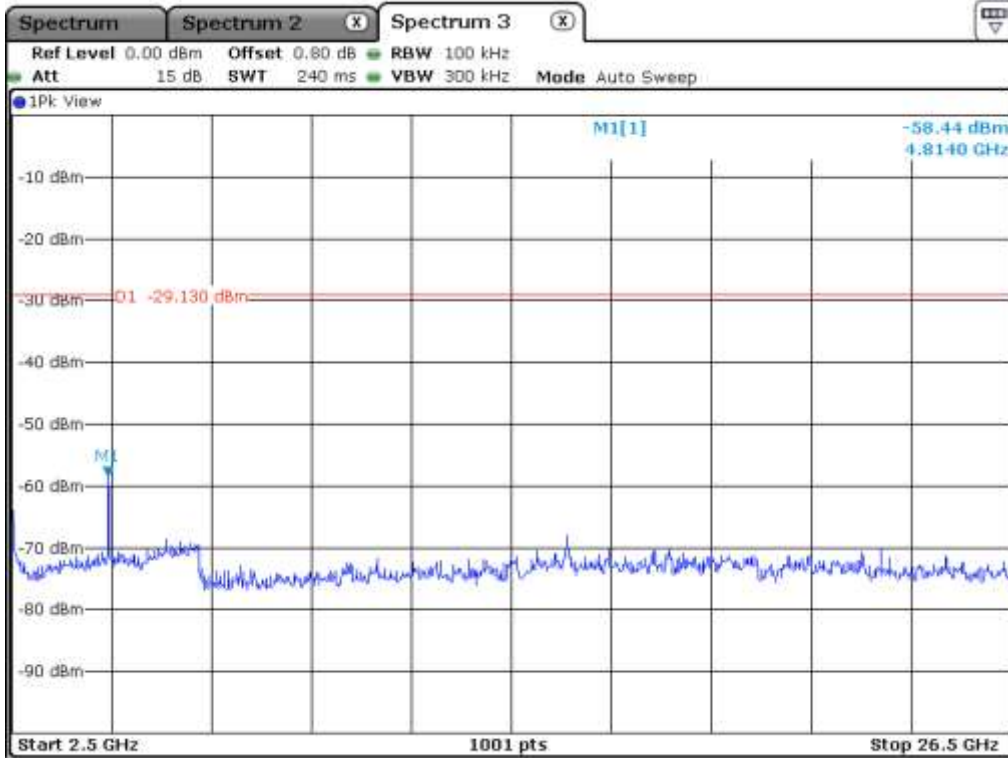


Low Channel

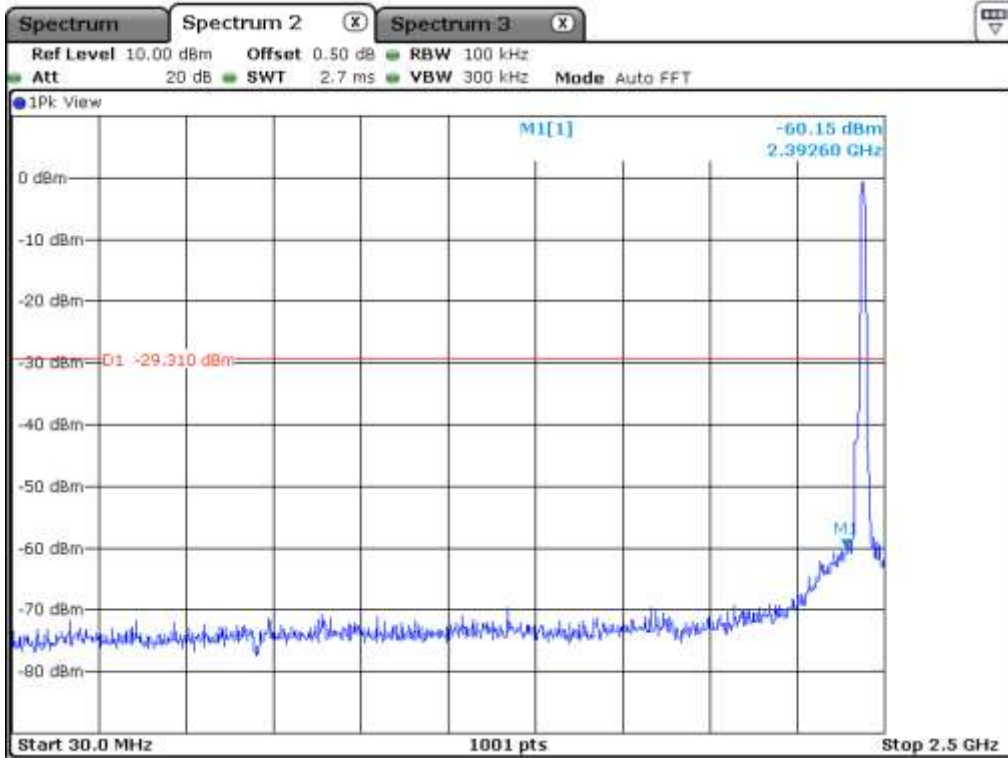


Middle Channel

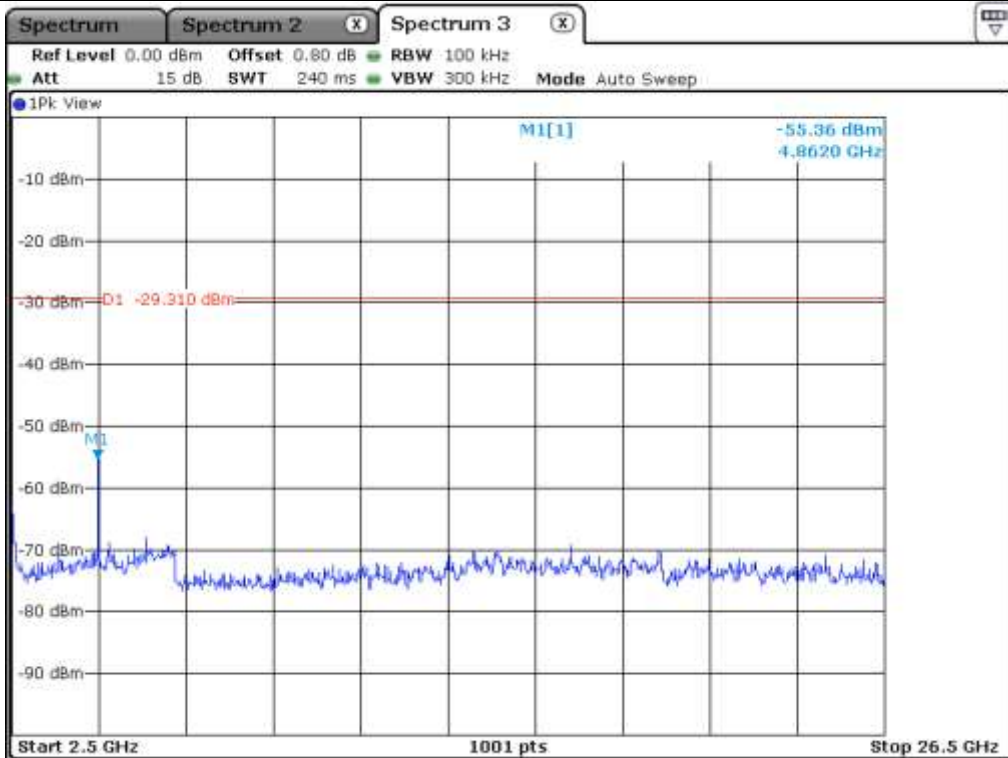


Middle Channel

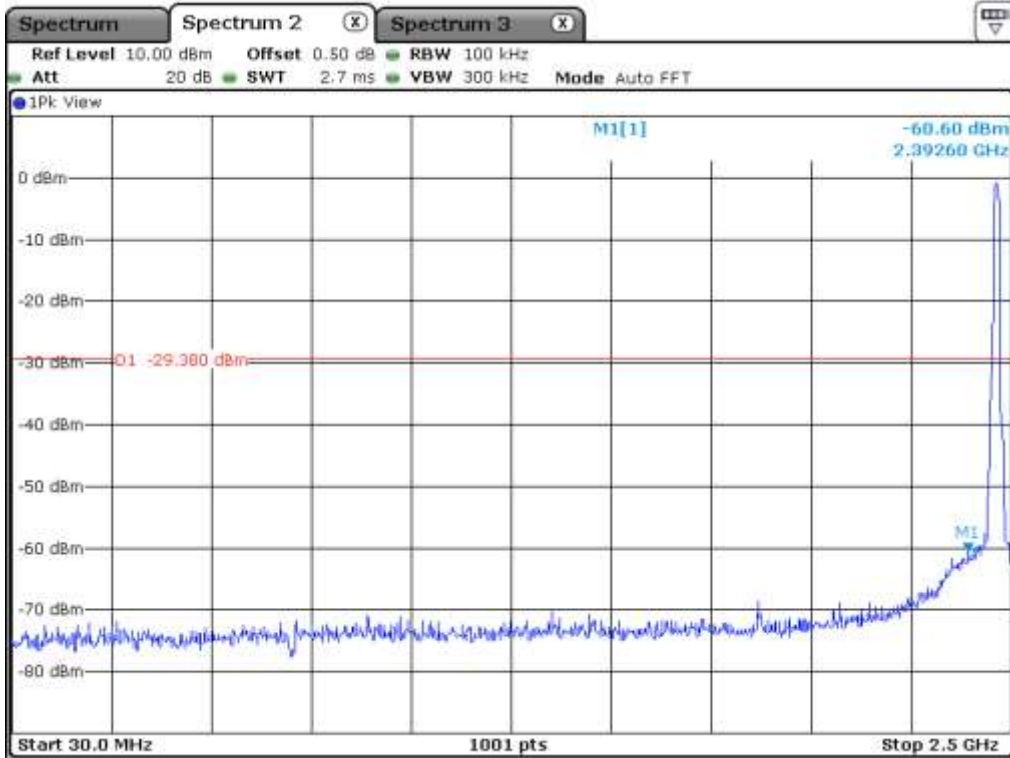


High Channel 11

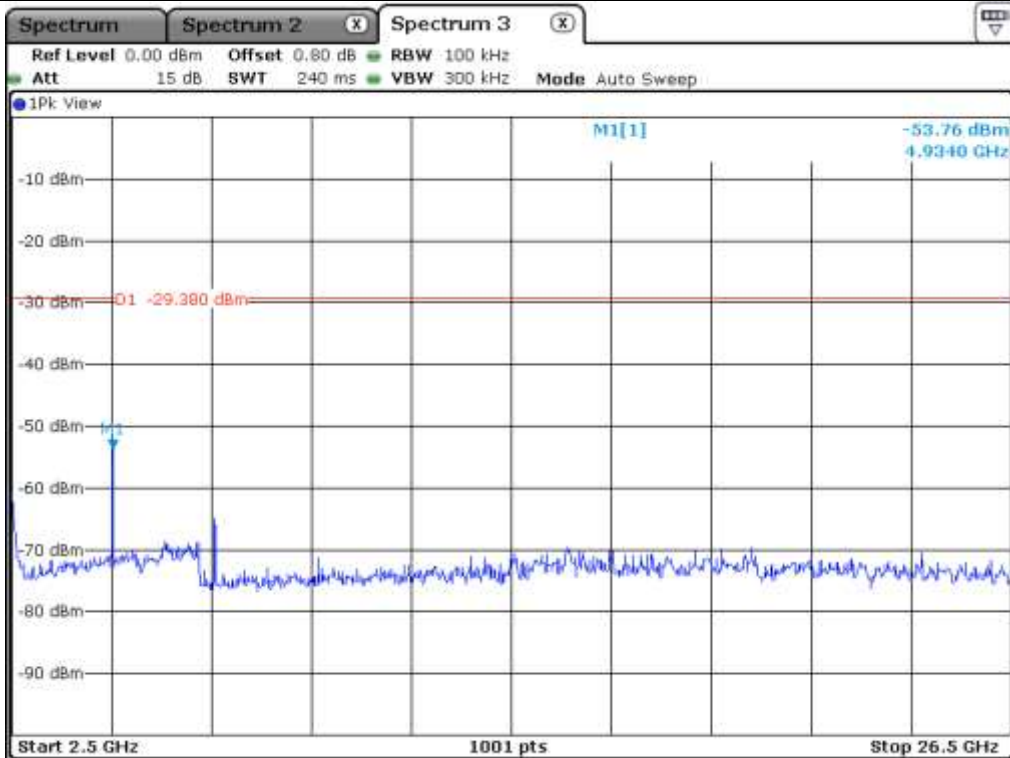


High Channel 11

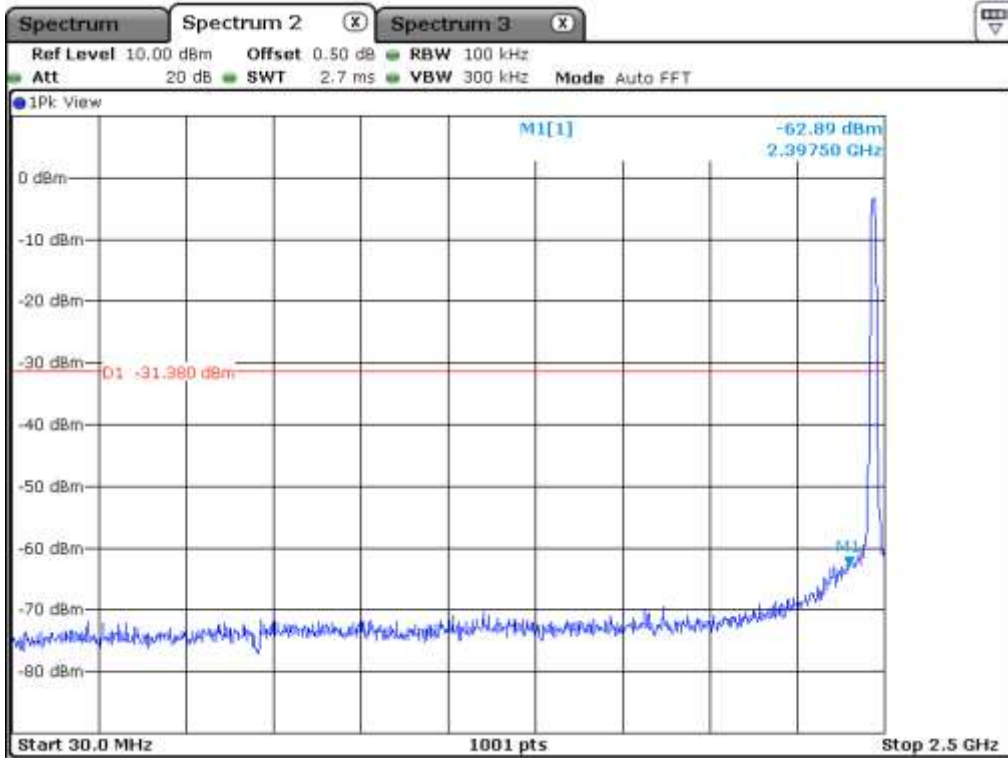


High Channel 12

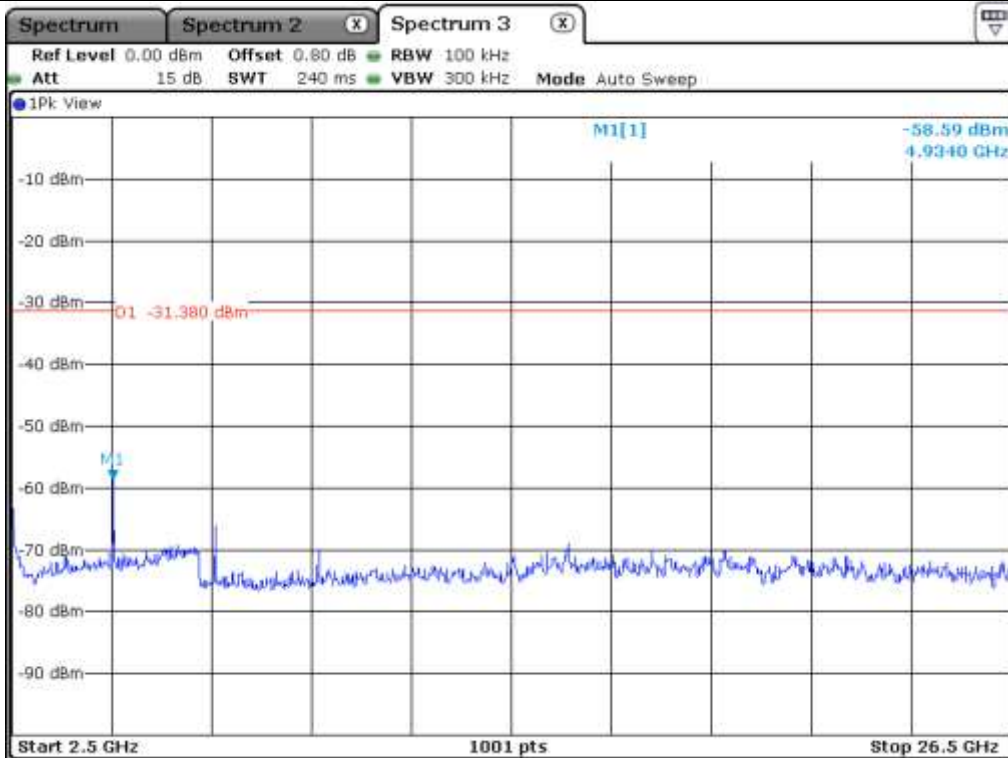

High Channel 12

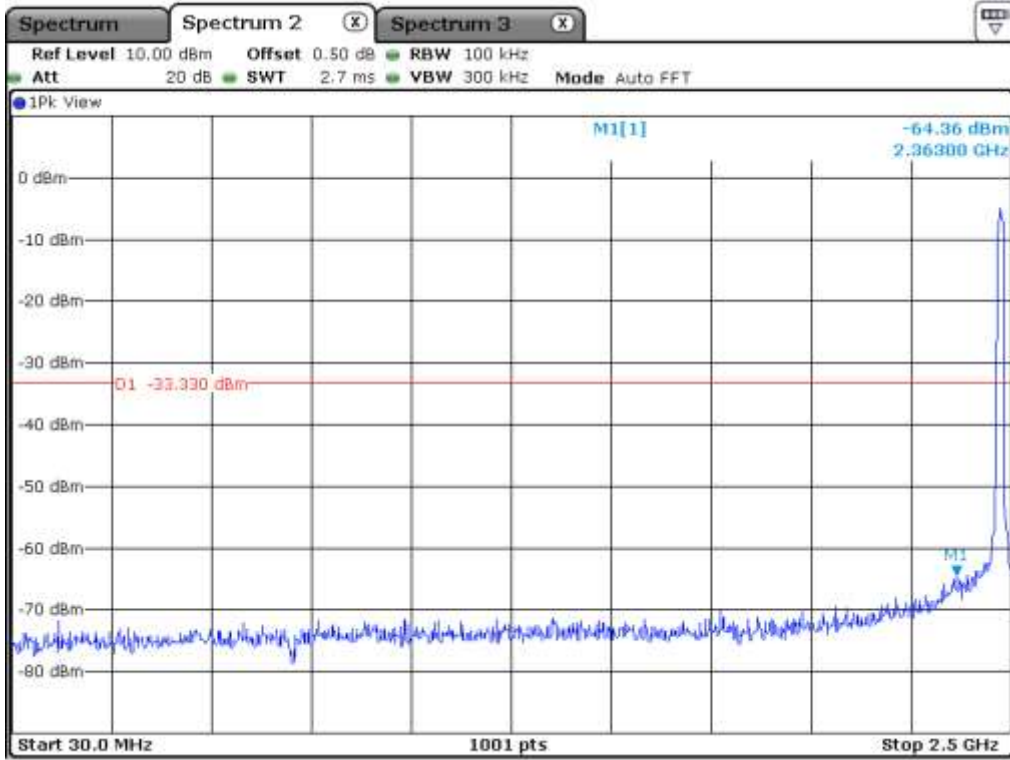


High Channel 13

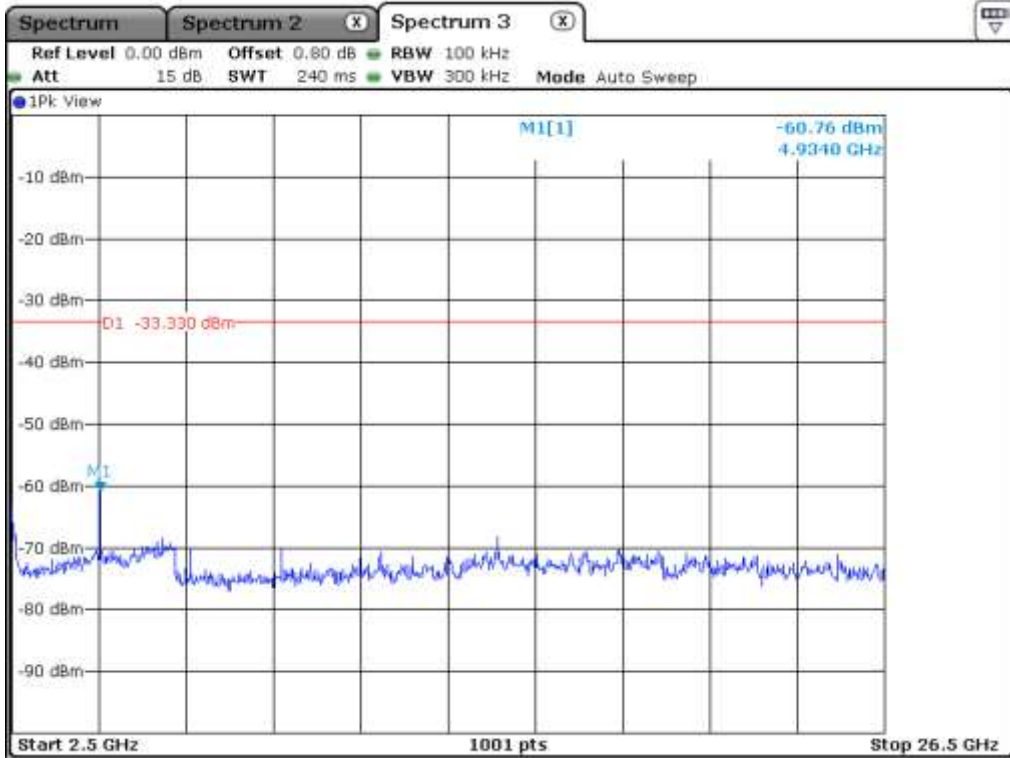


High Channel 13

9.5.3 Test data for 802.11n_HT20 WLAN Mode


9.5.3.1 Test data for Antenna 0

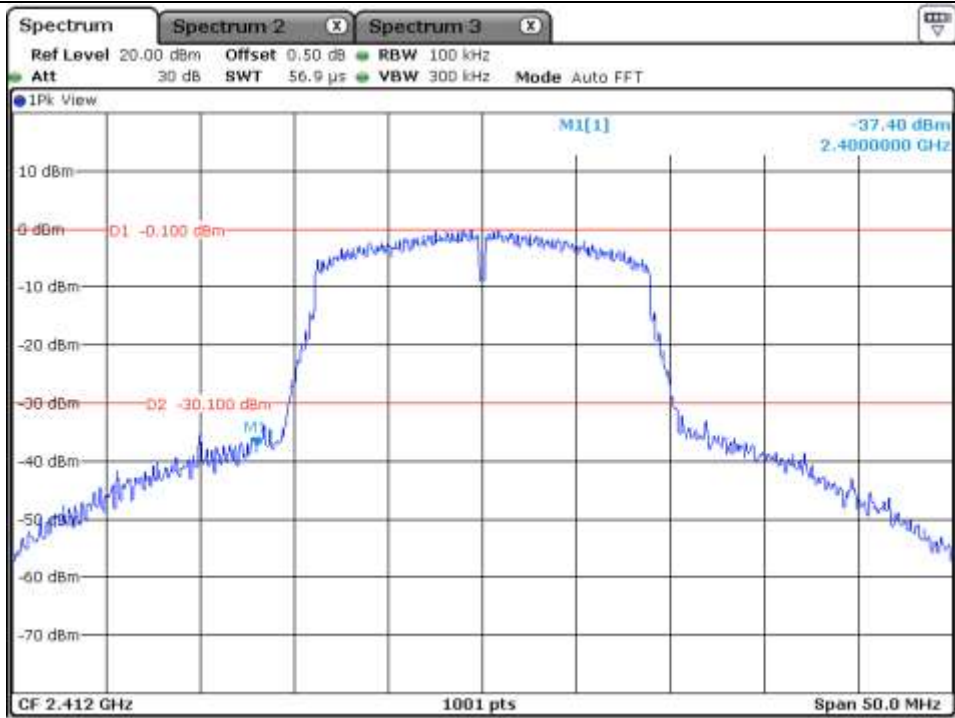


Low Channel

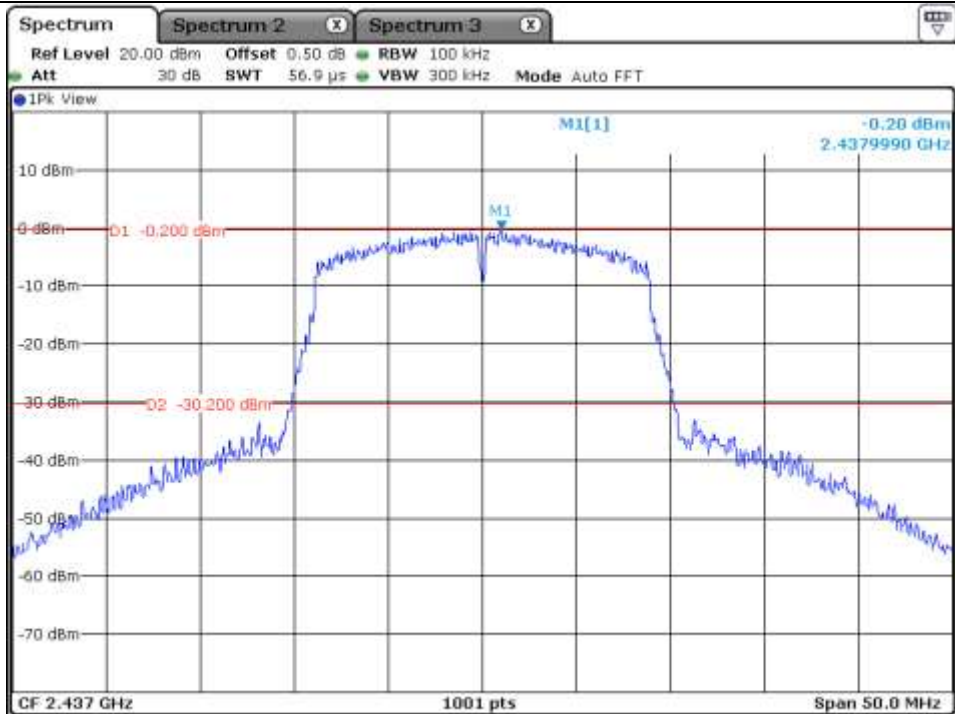


Middle Channel

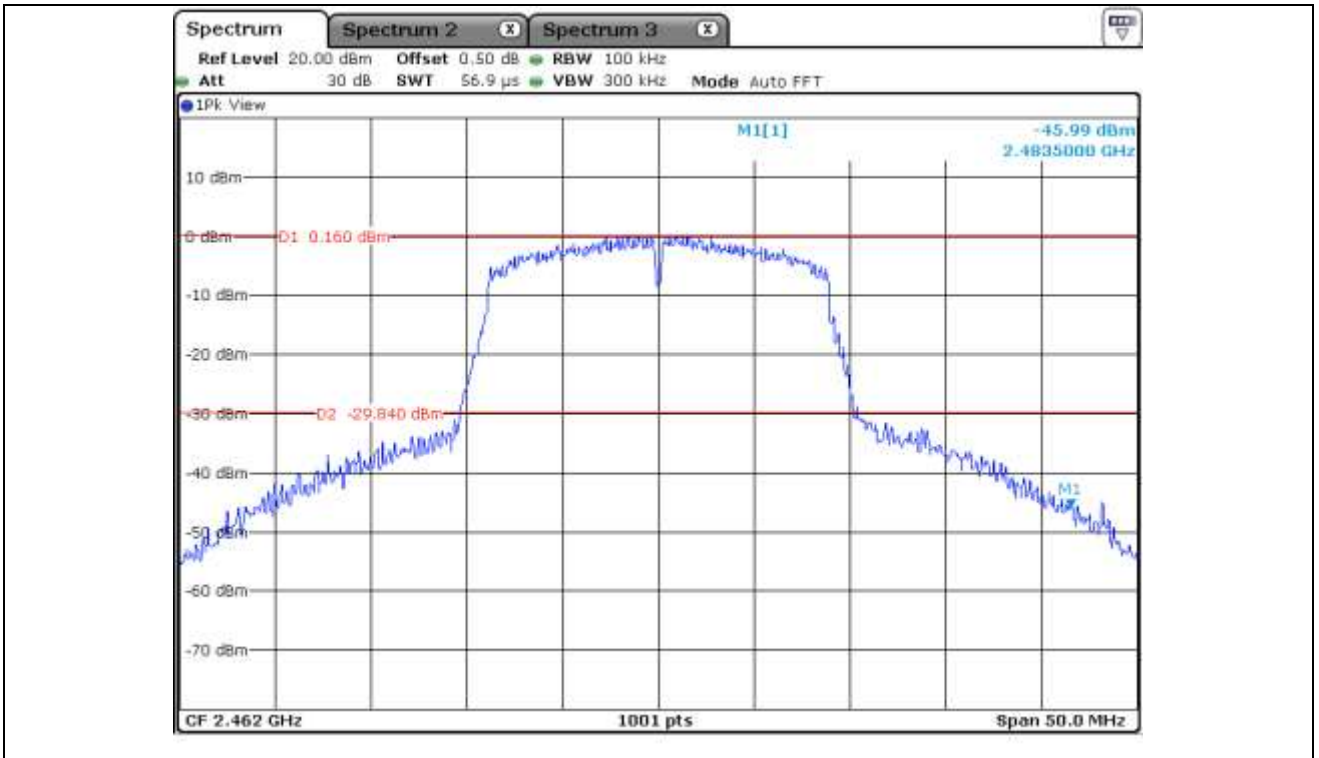


High Channel 11

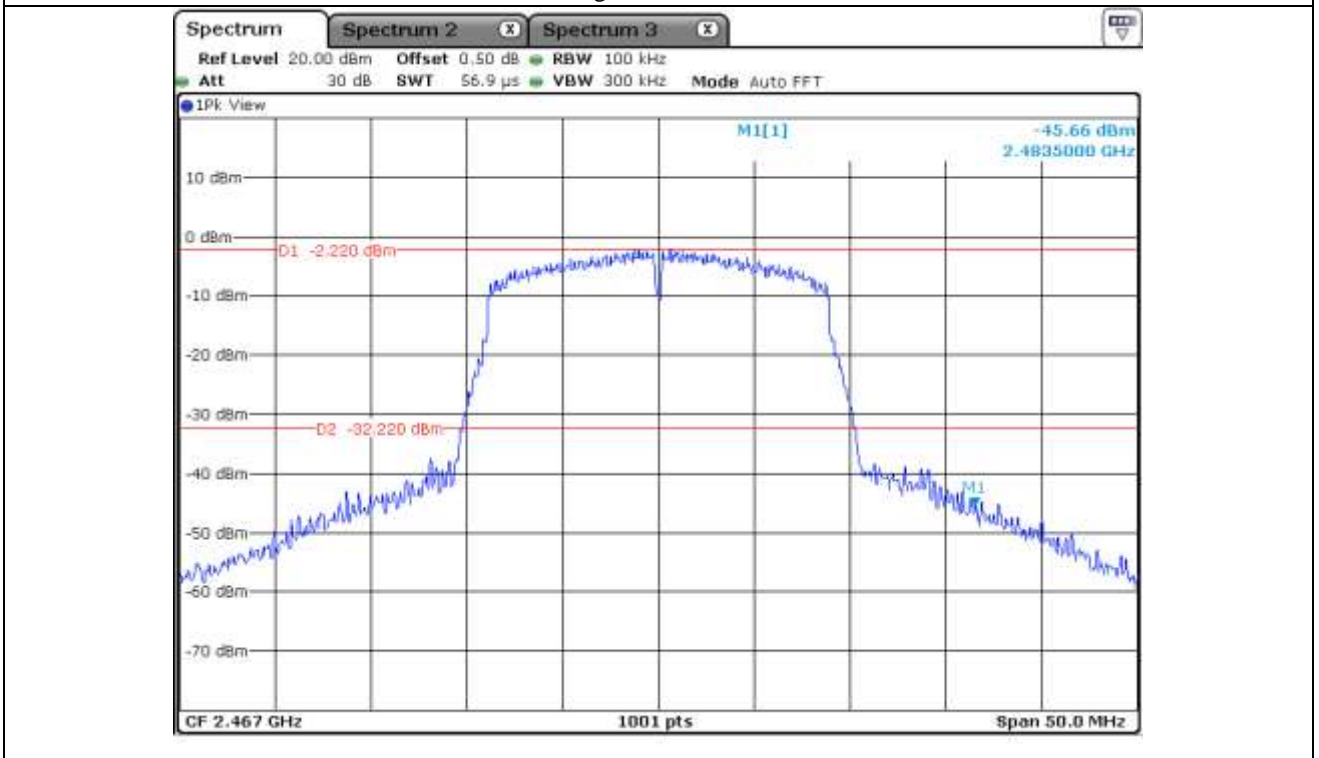


High Channel 12

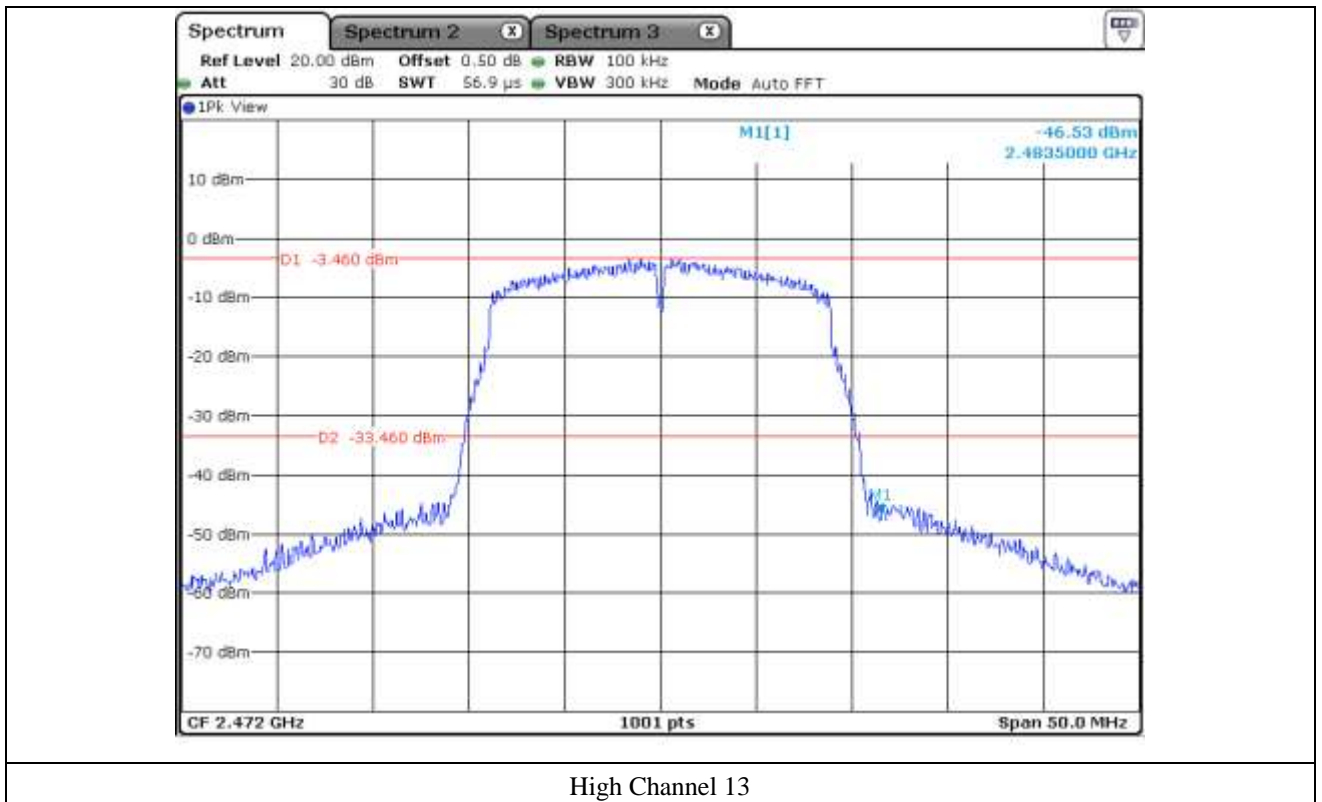


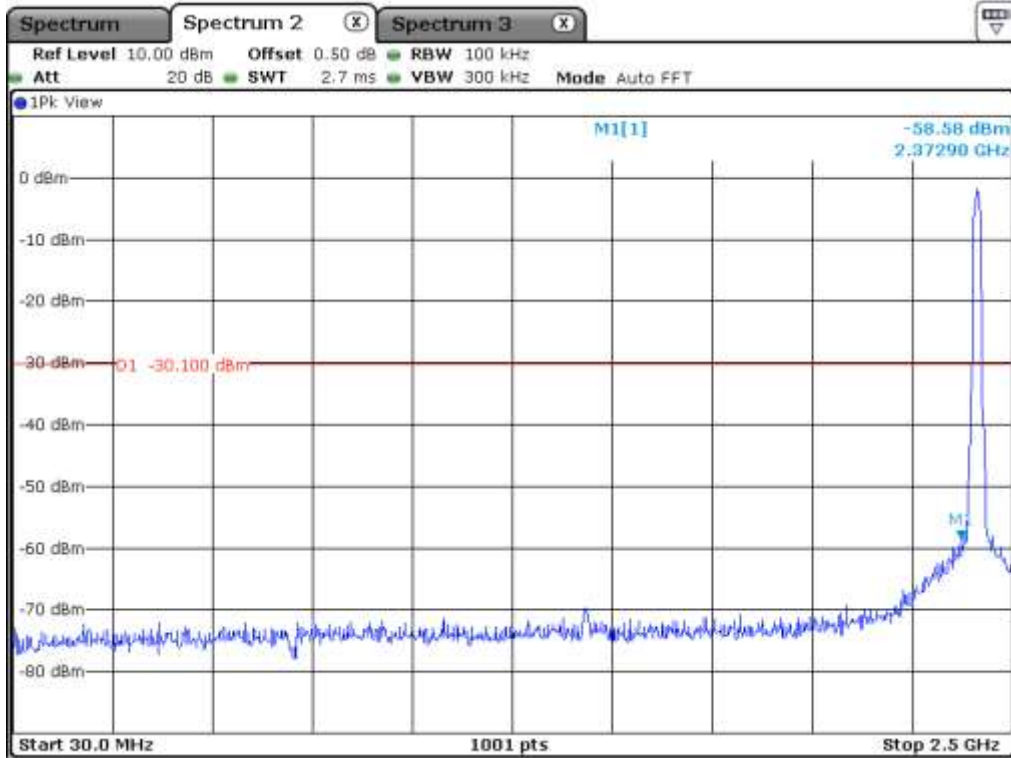


Low Channel

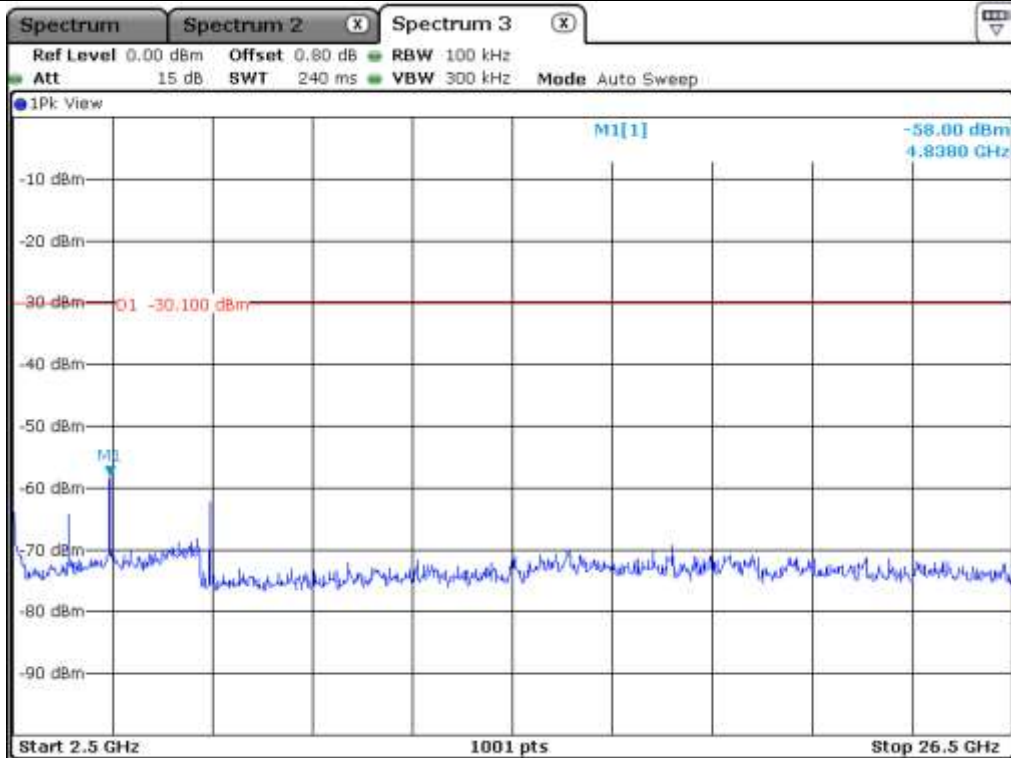


Low Channel

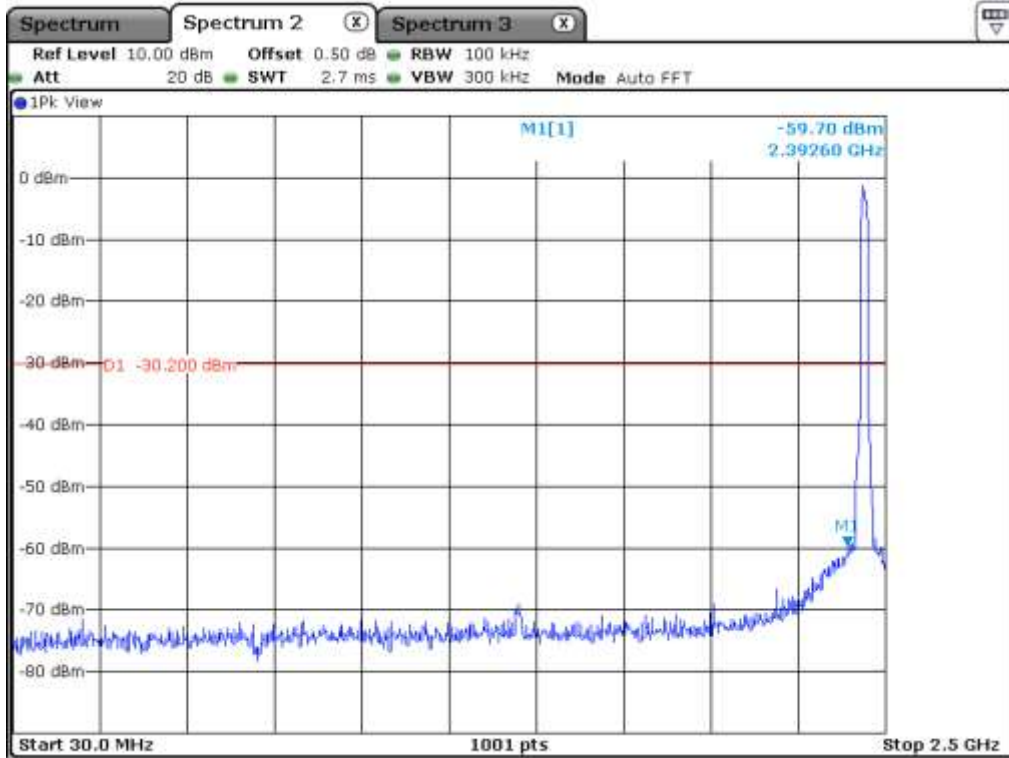


Middle Channel

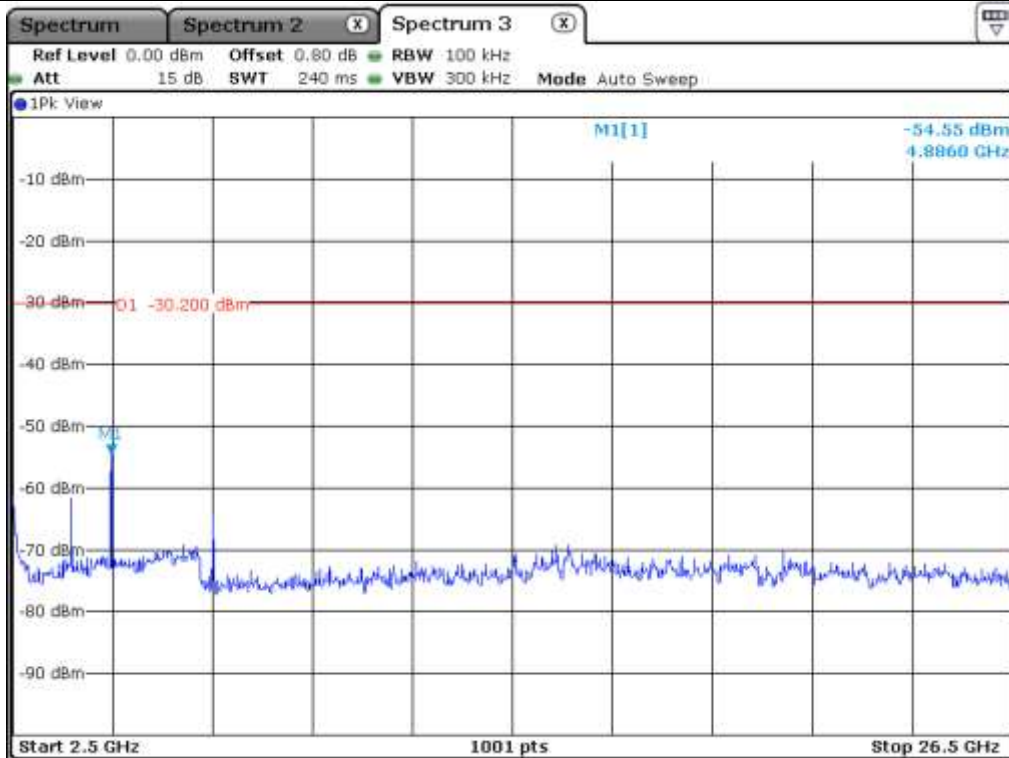


Middle Channel

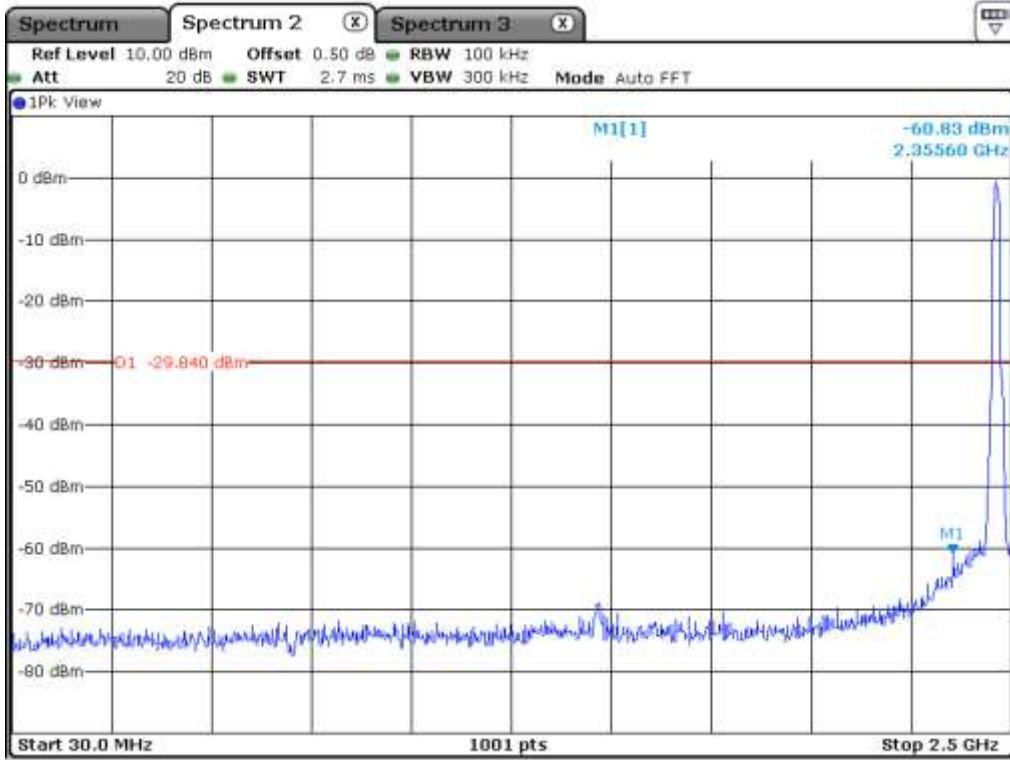


High Channel 11

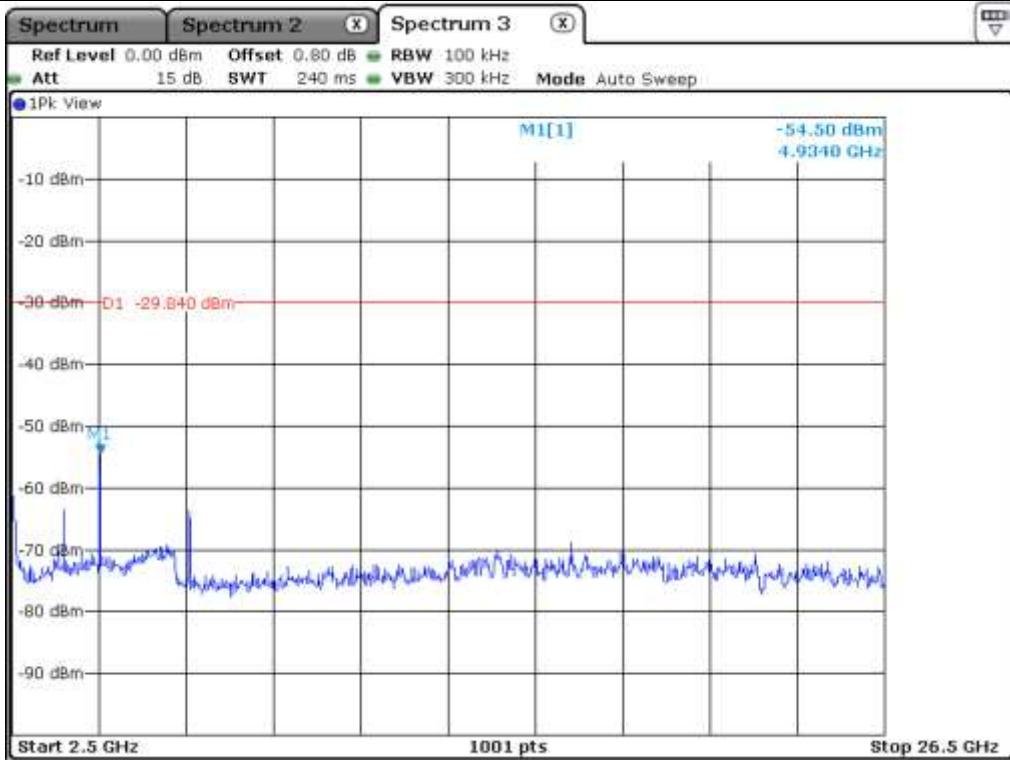


High Channel 11

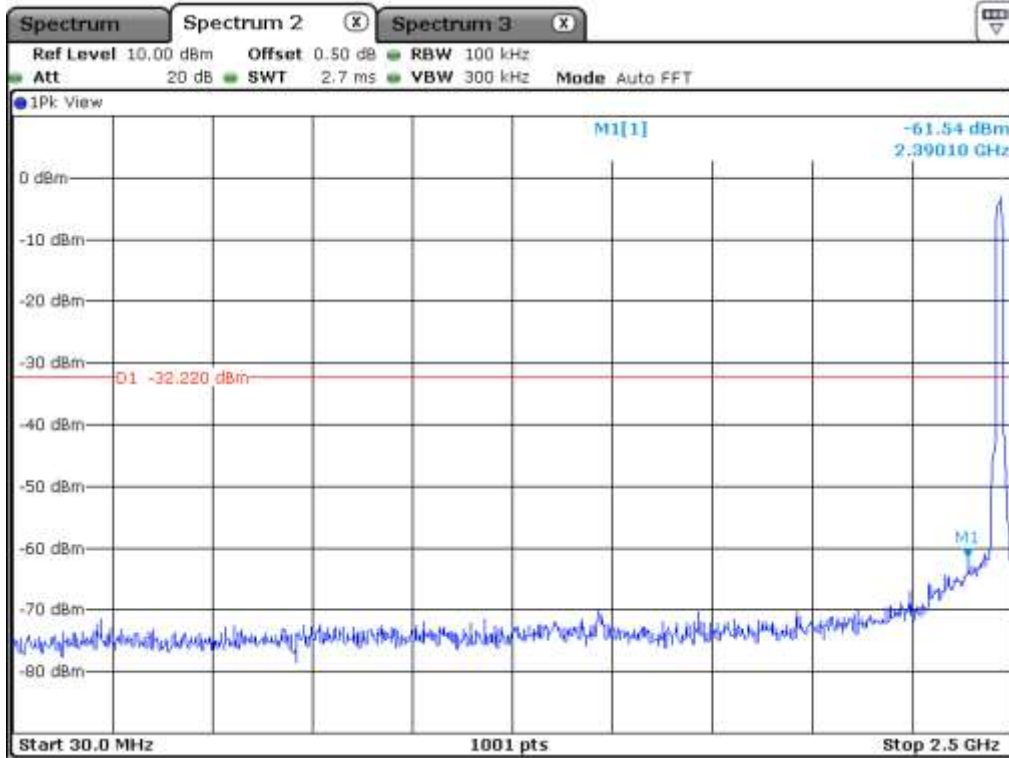


High Channel 12

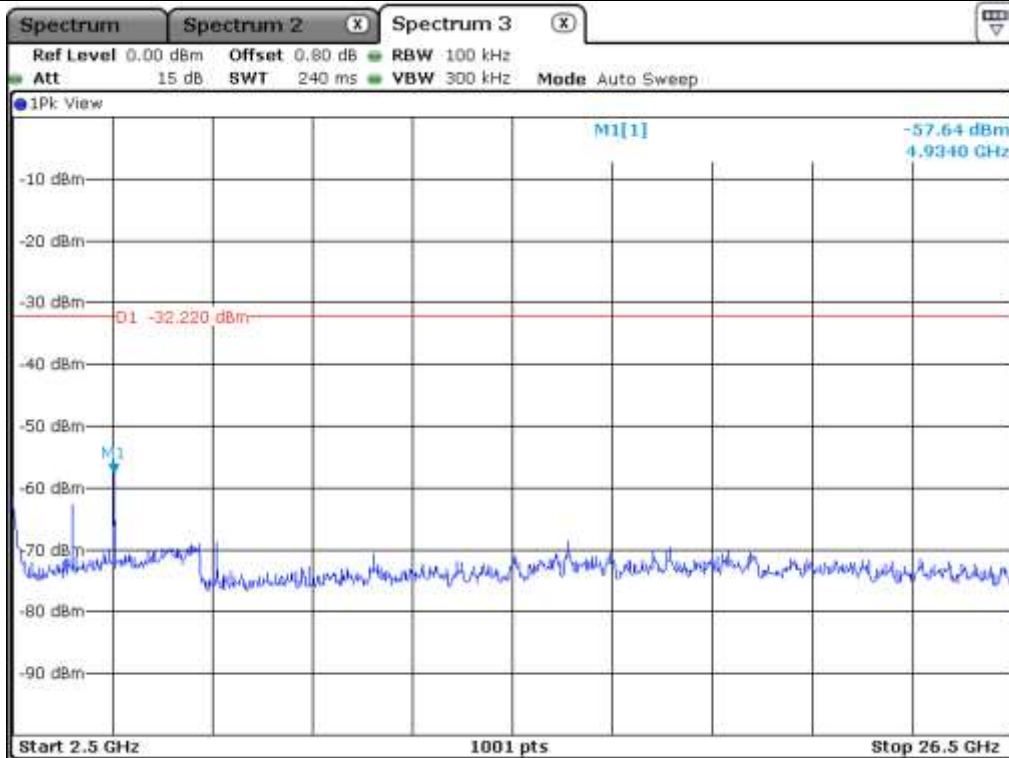

High Channel 12

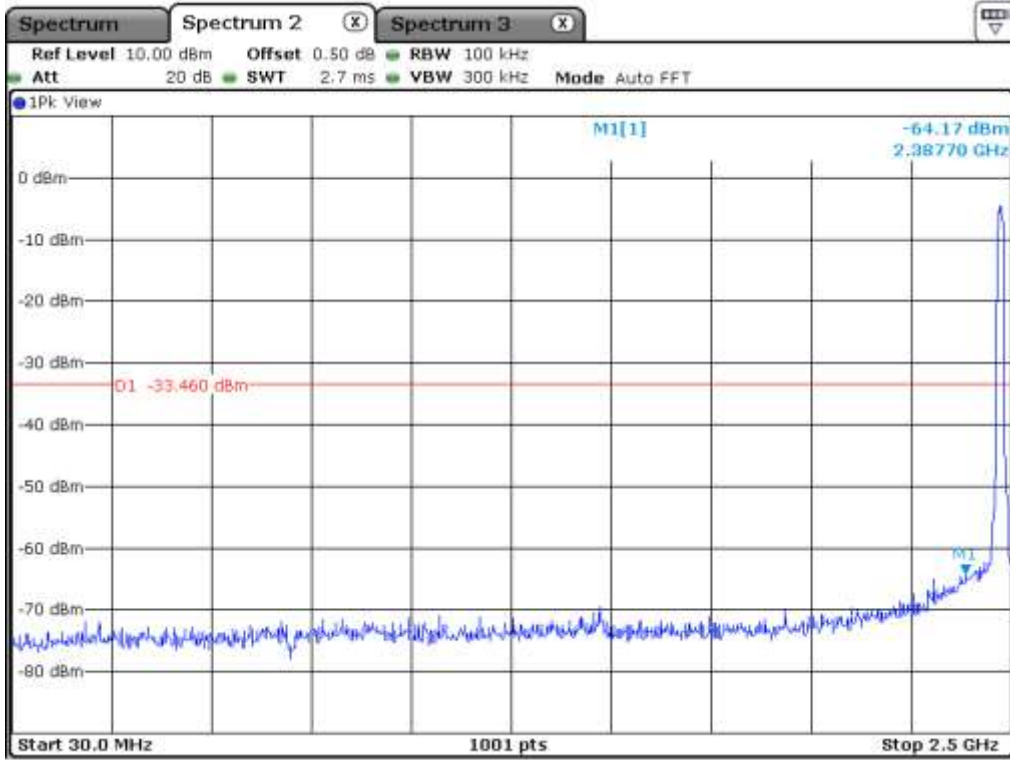


High Channel 13

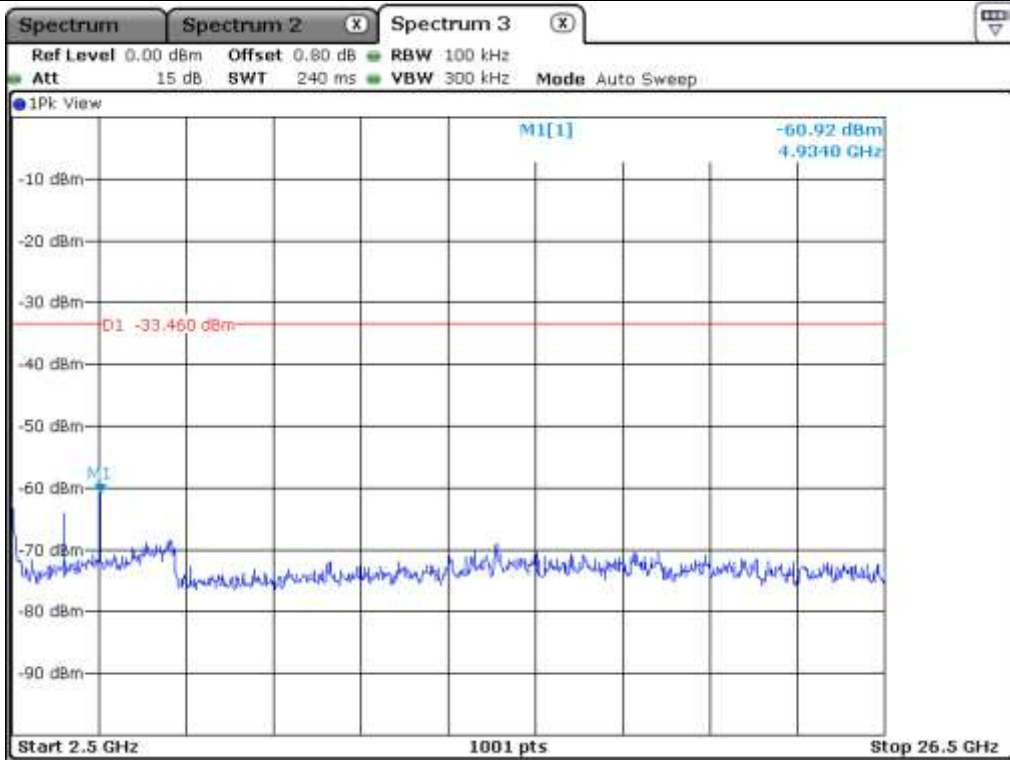


High Channel 13


9.5.3.2 Test data for Antenna 1

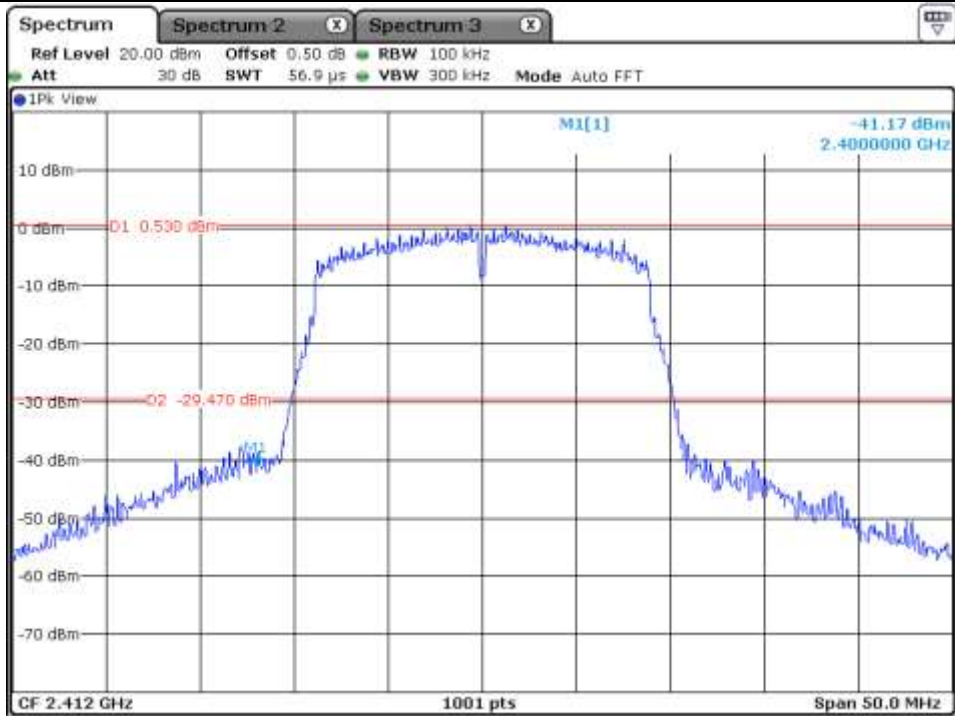


Low Channel

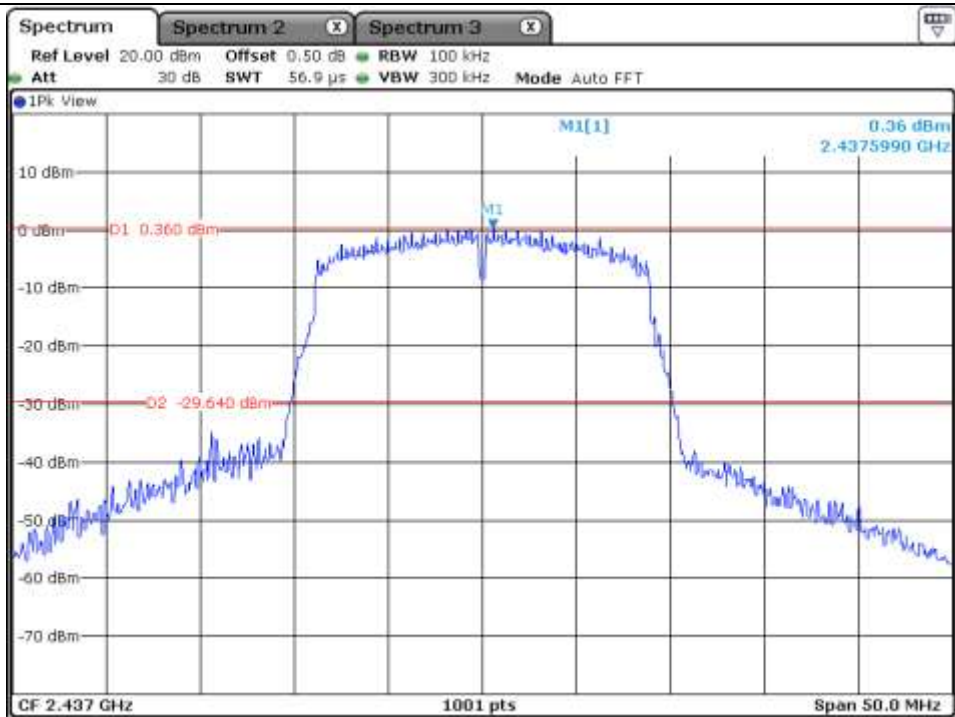


Middle Channel

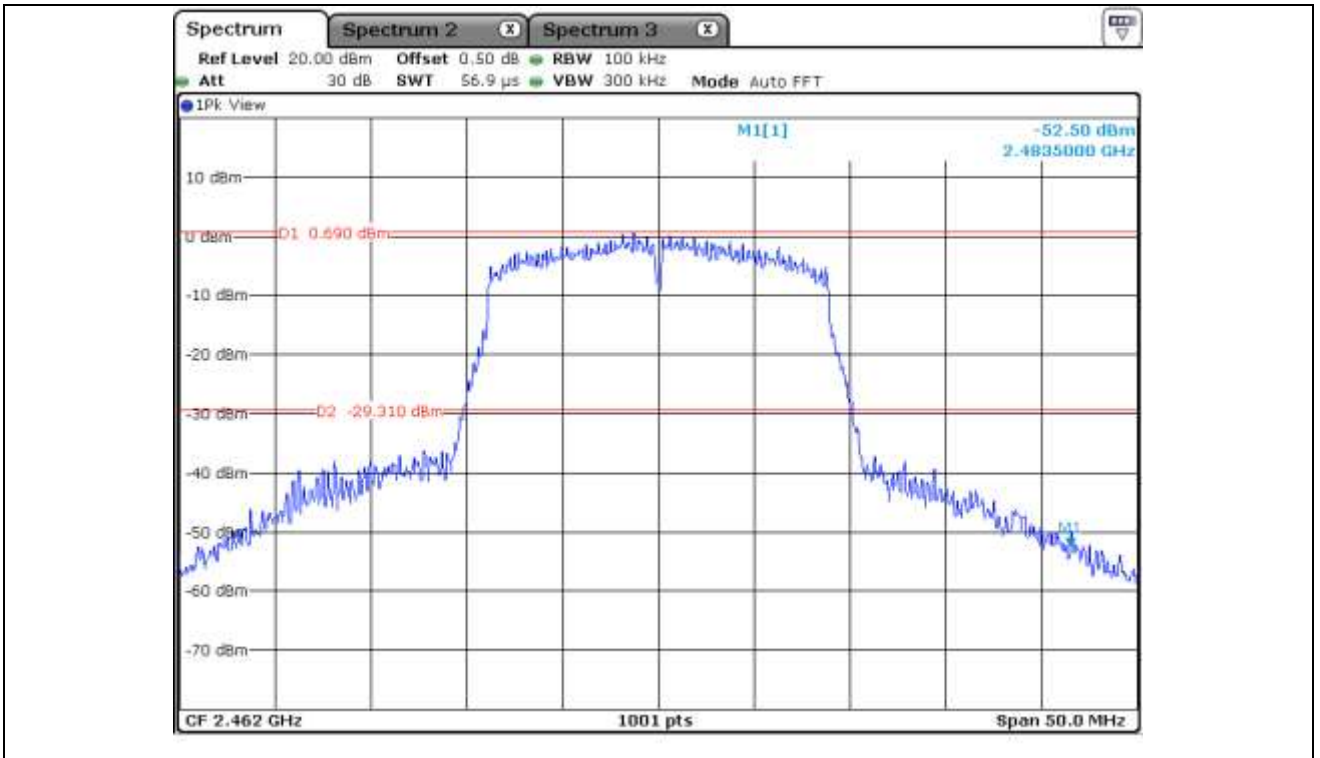


High Channel 11

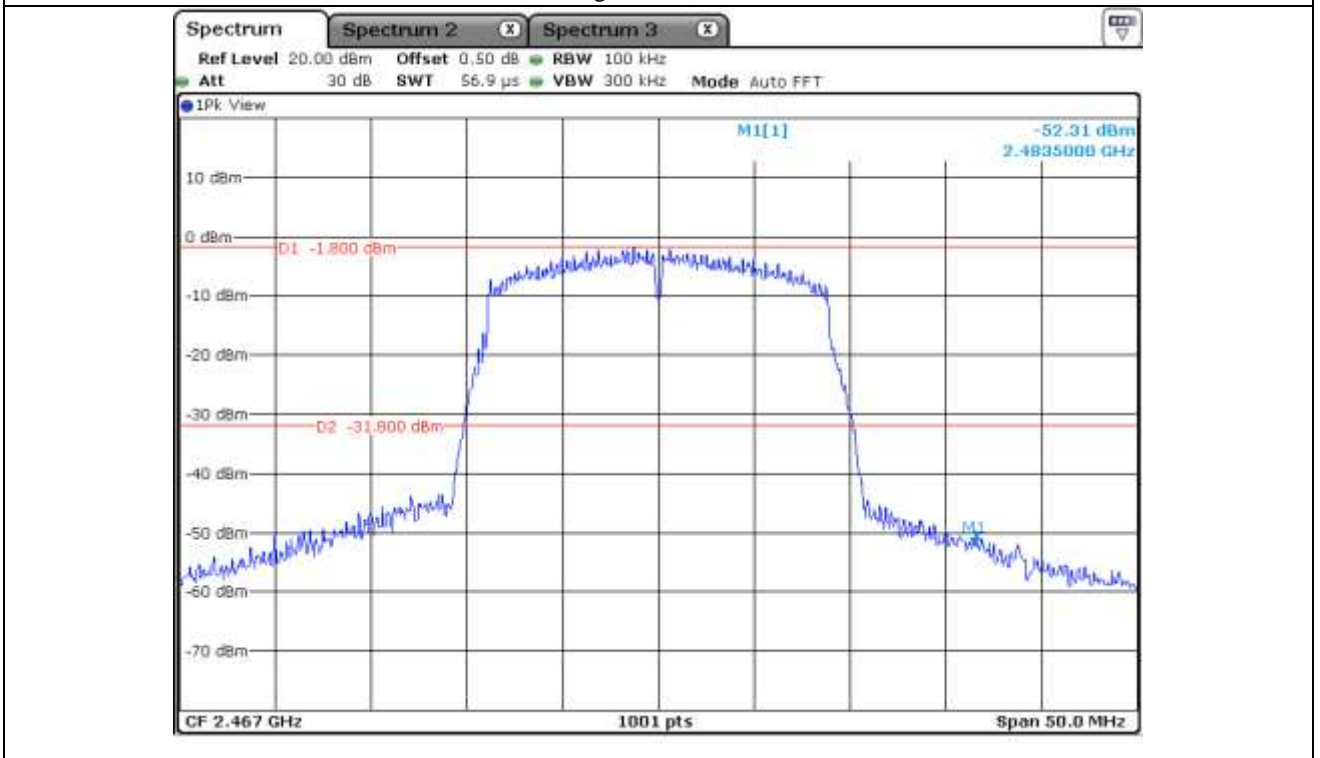


High Channel 12

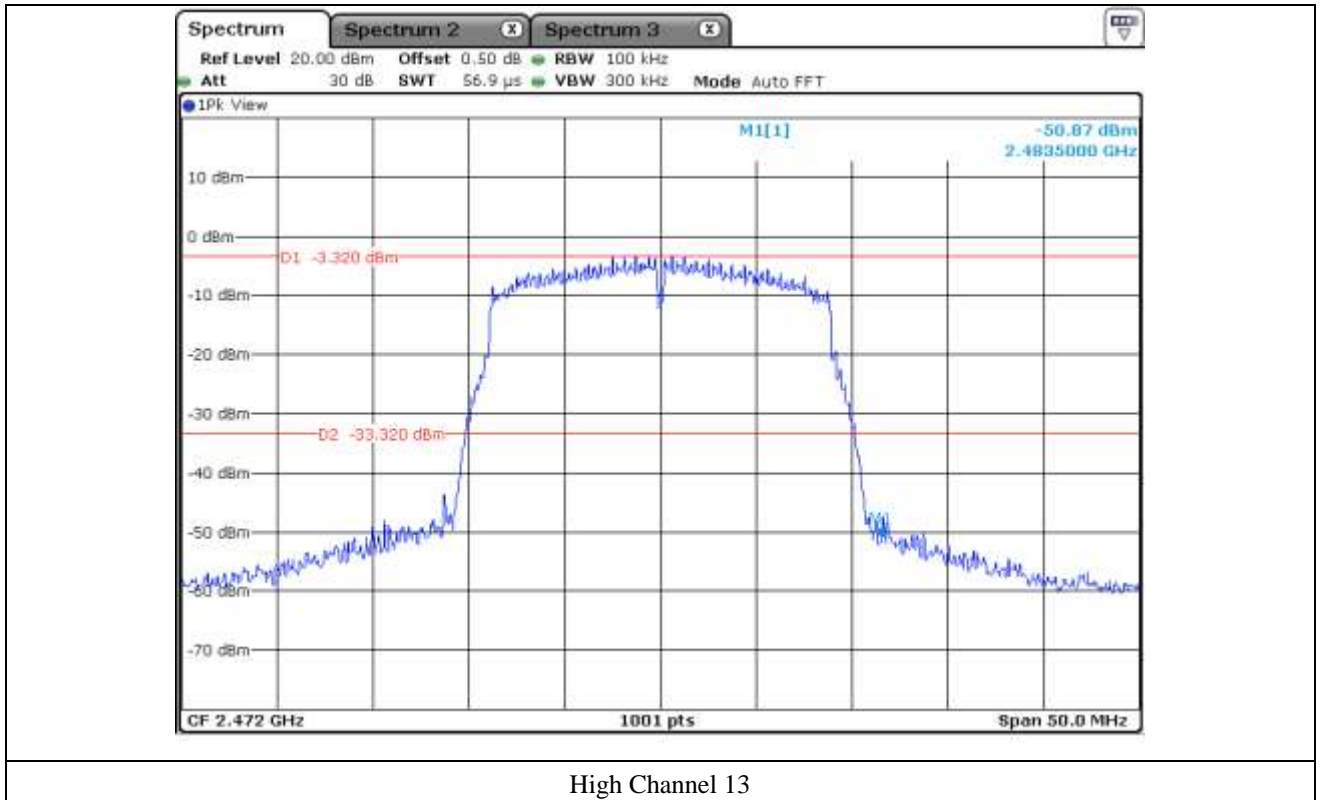


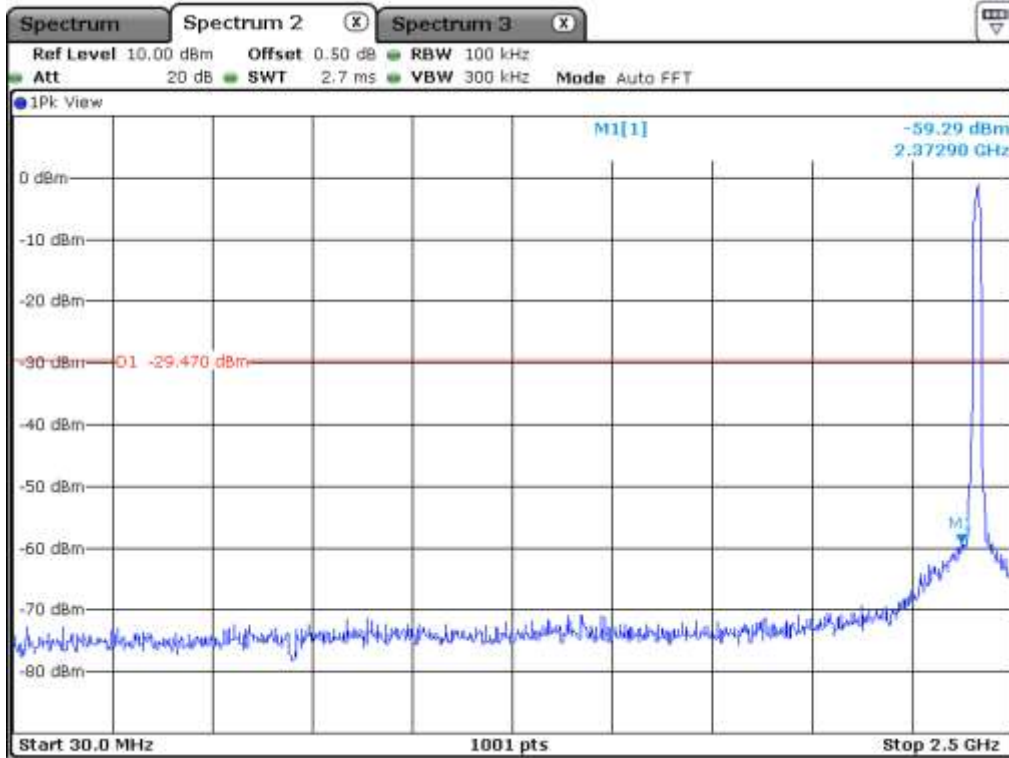


Low Channel

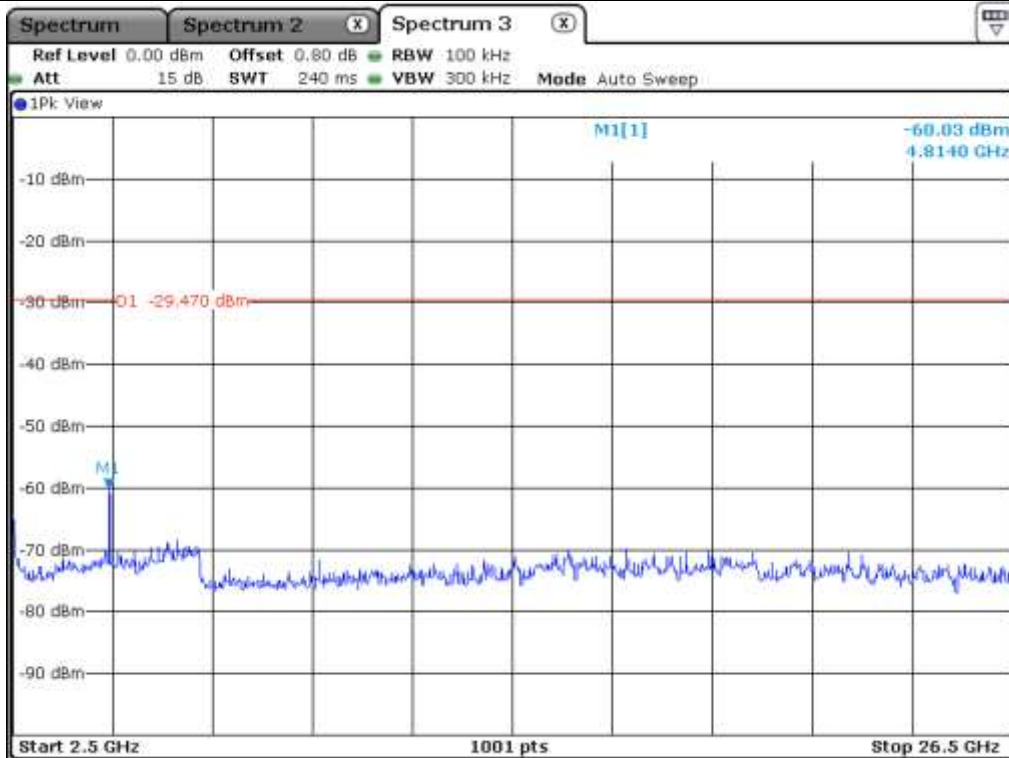


Low Channel

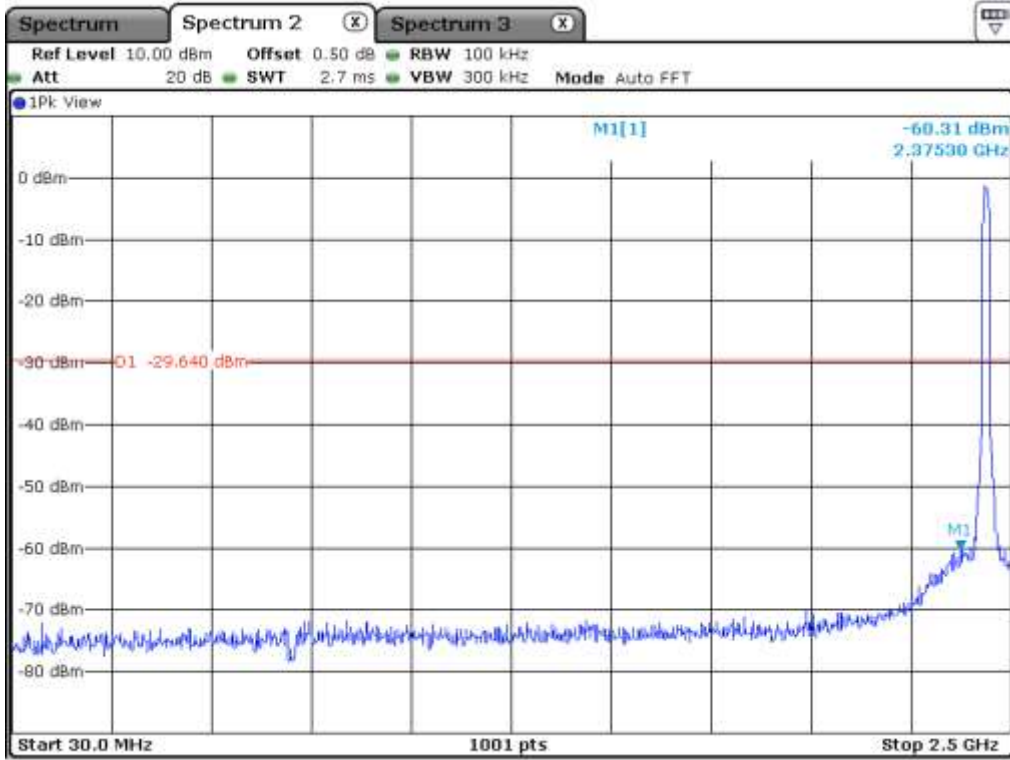


Middle Channel

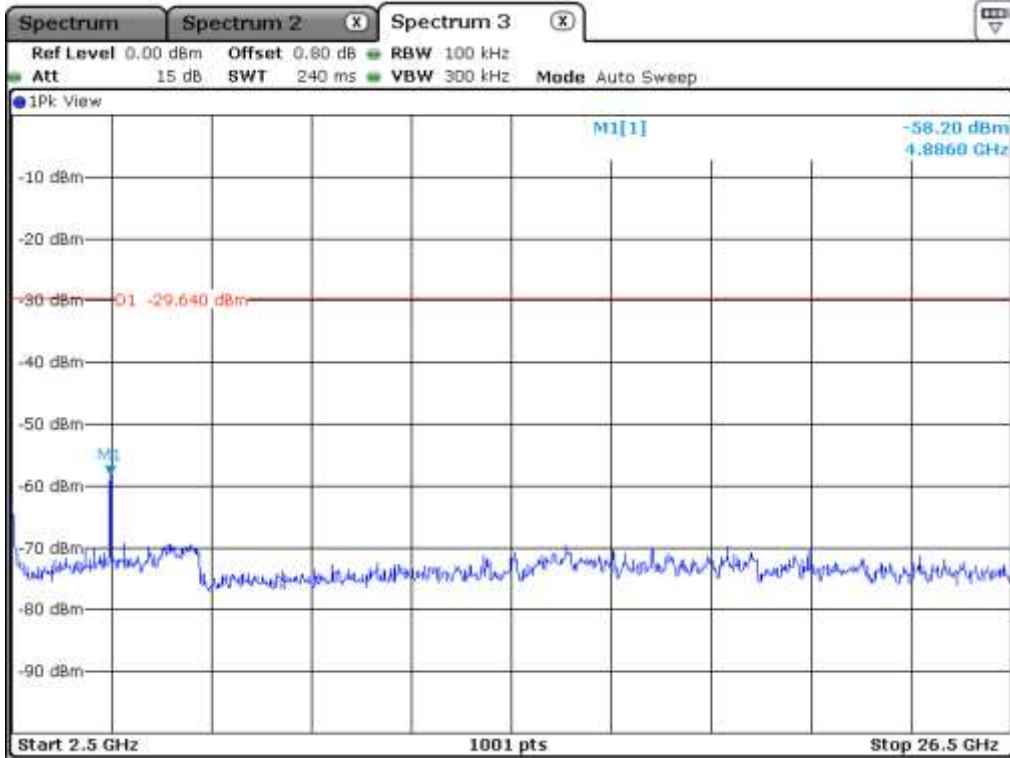


Middle Channel

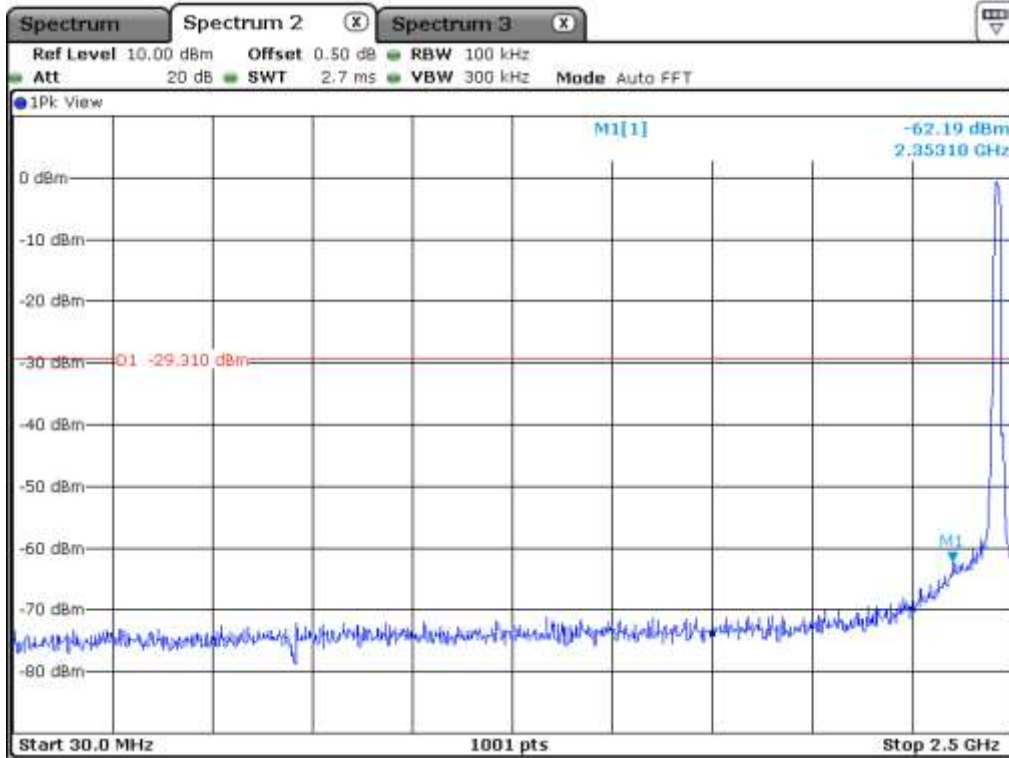


High Channel 11

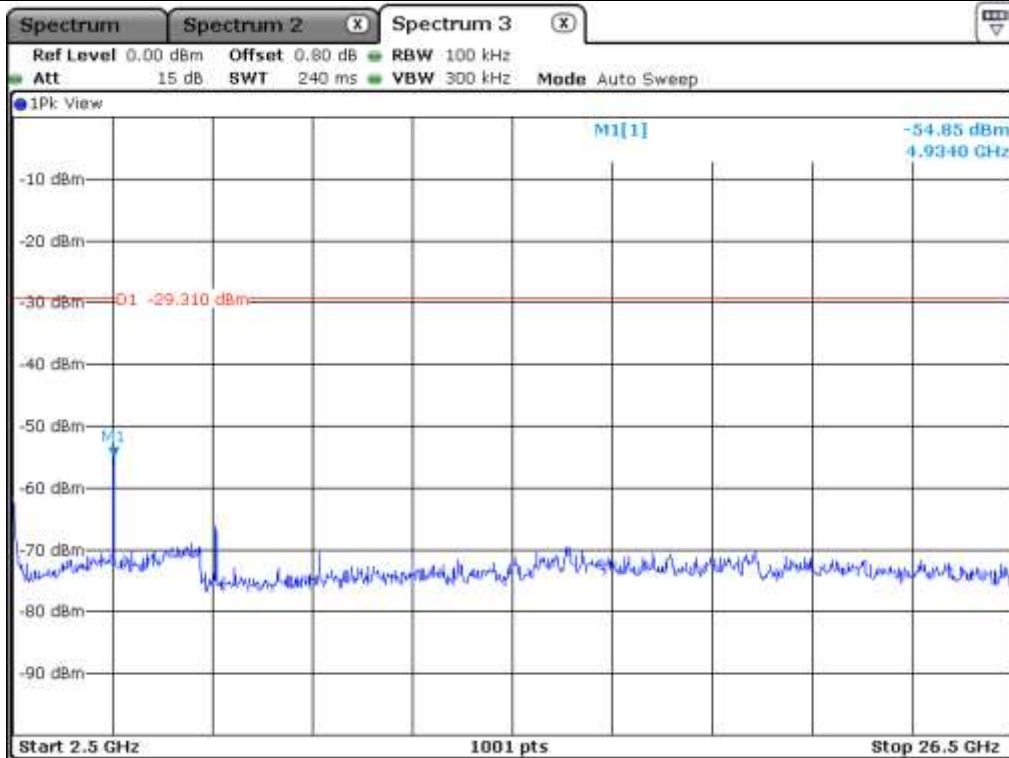


High Channel 11

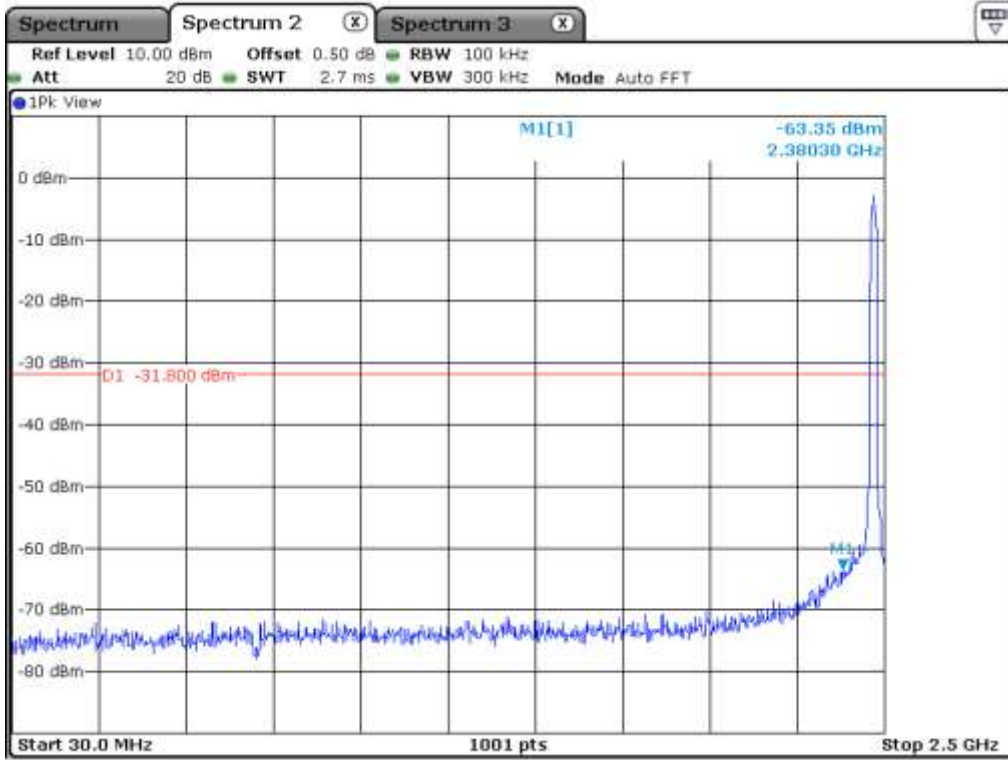


High Channel 12

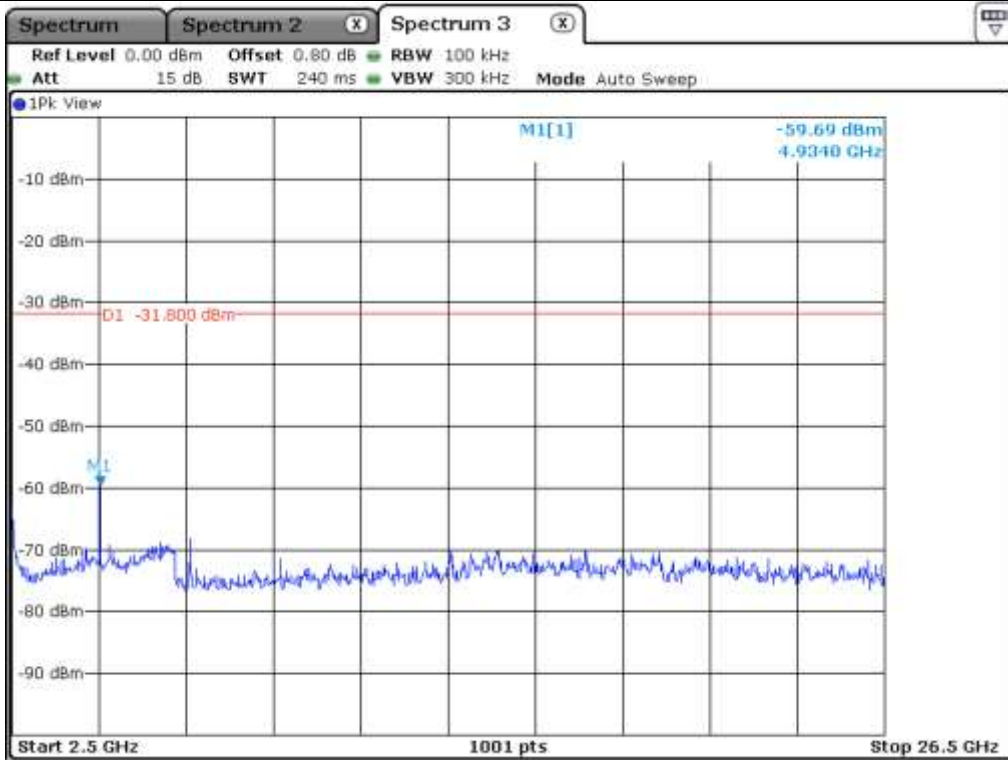

High Channel 12

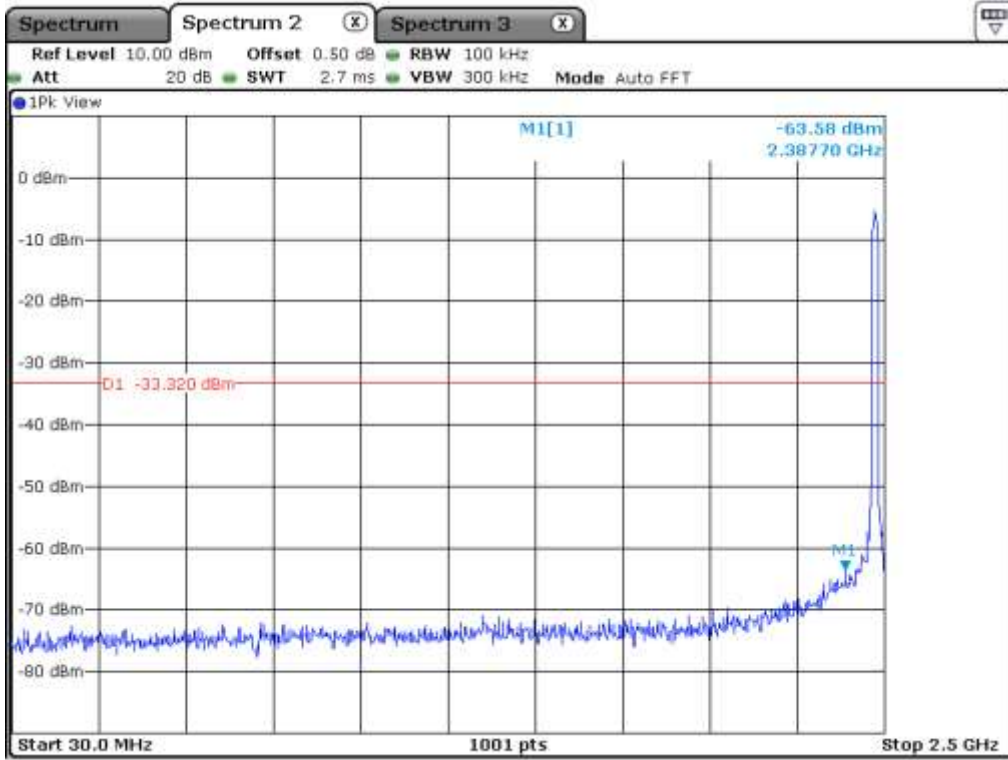


High Channel 13

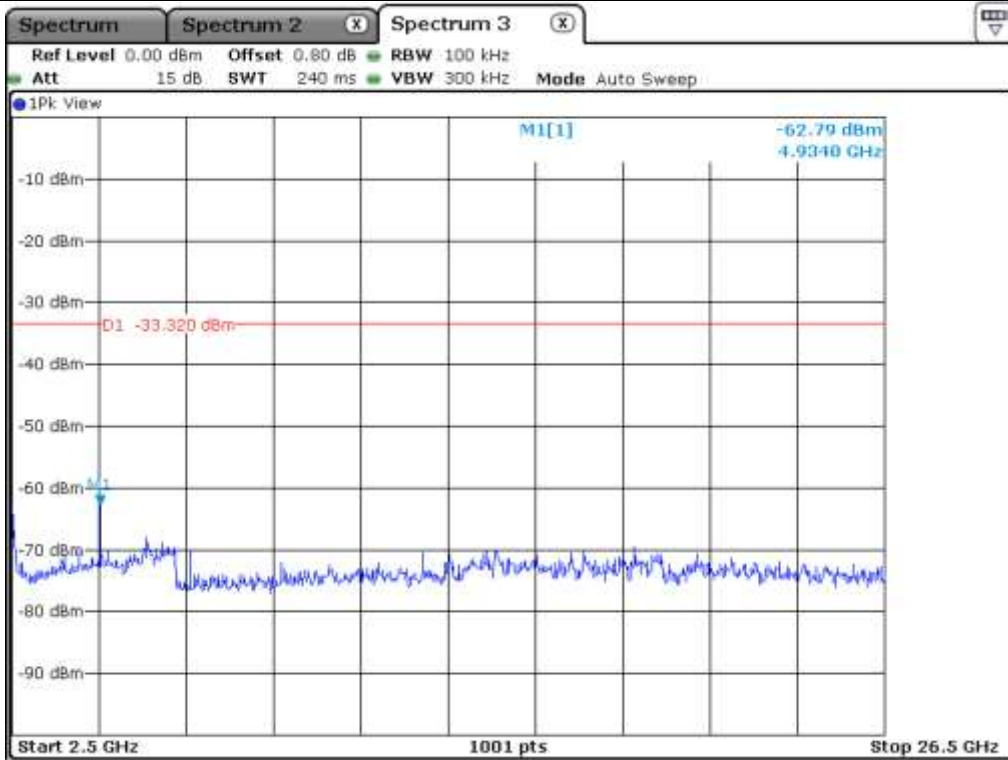


High Channel 13

9.5.4 Test data for 802.11n_HT40 WLAN Mode


9.5.4.1 Test data for Antenna 0

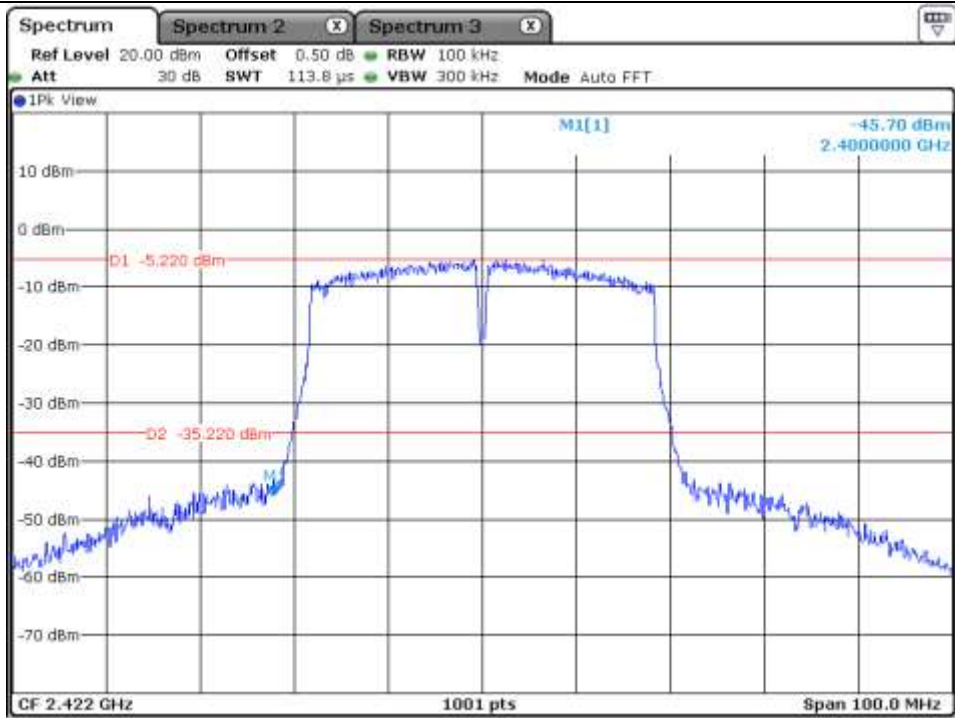


Low Channel

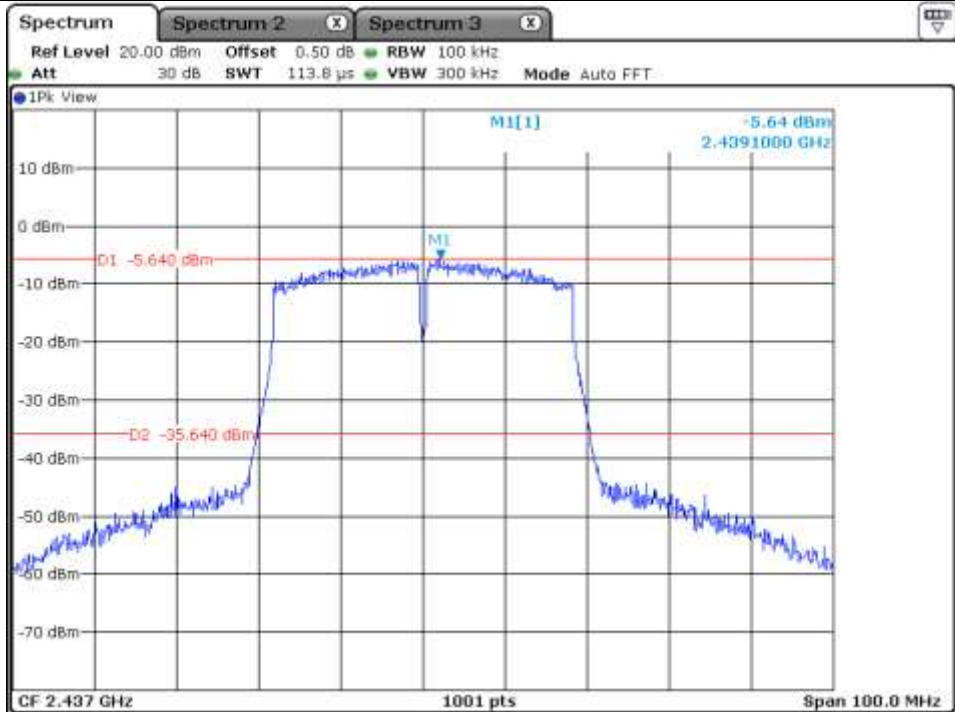


Middle Channel

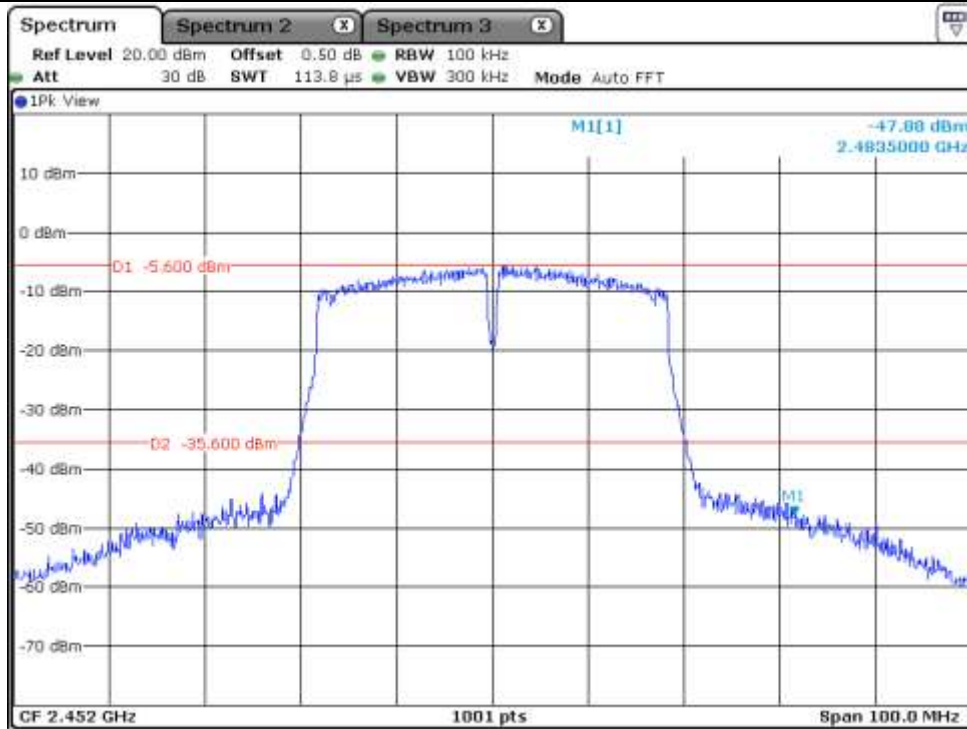


High Channel 9

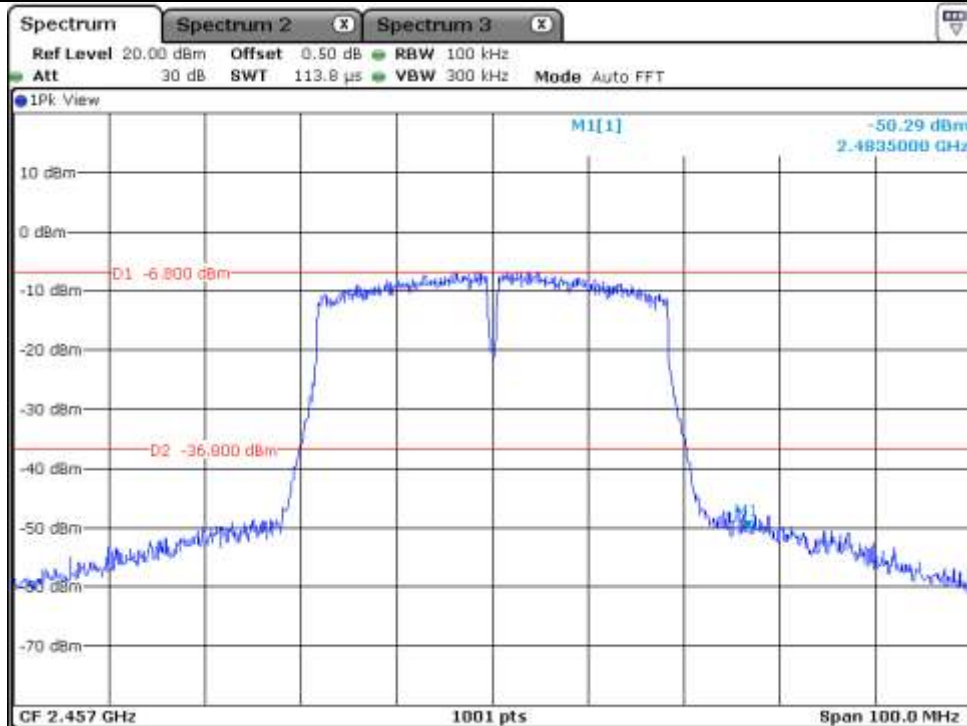


High Channel 10

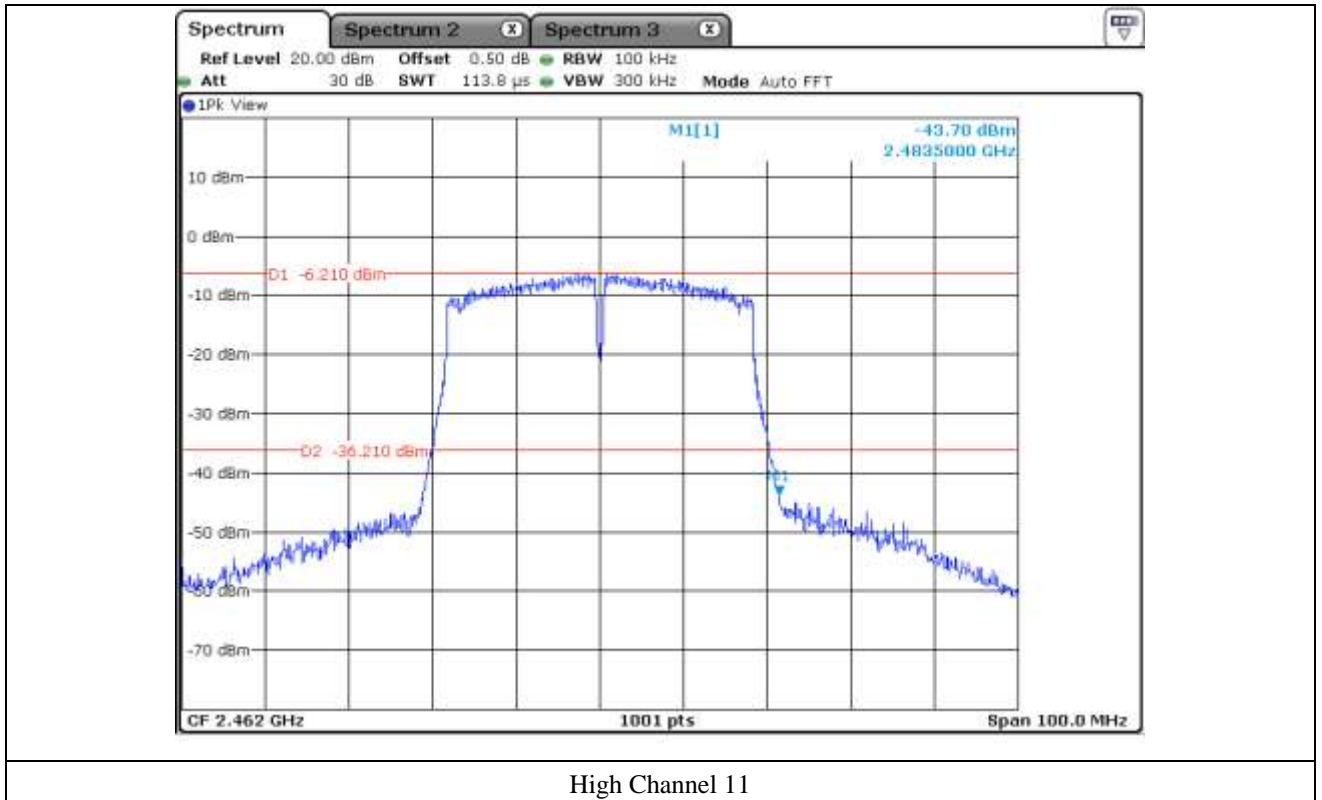


High Channel 11

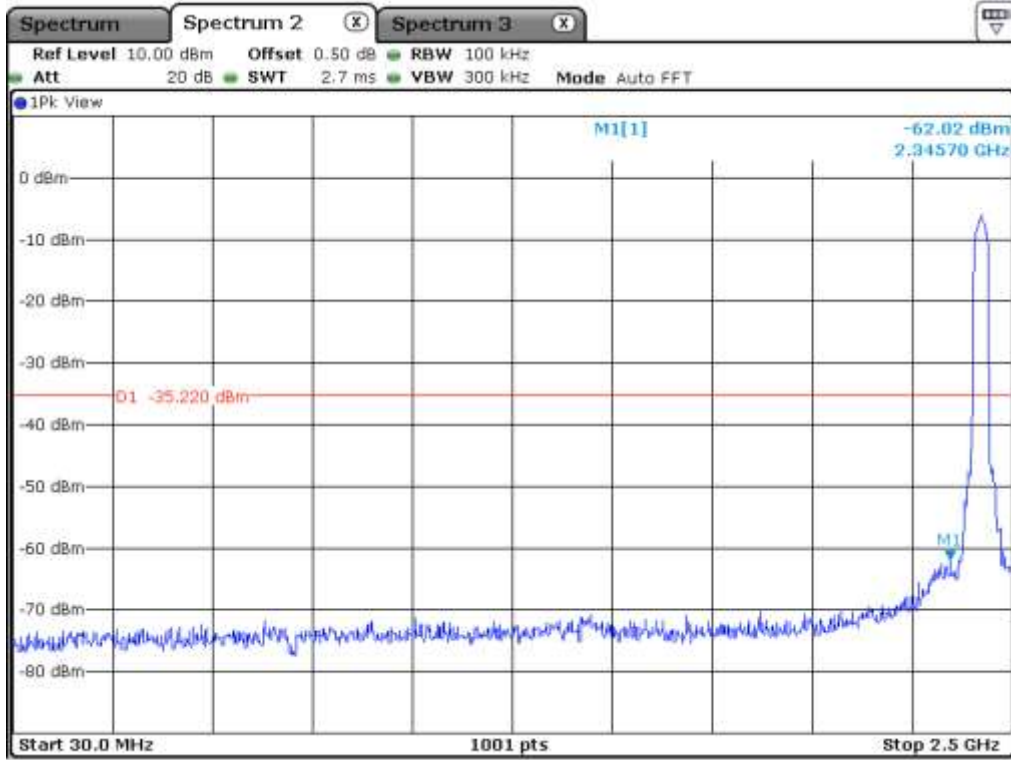


Low Channel

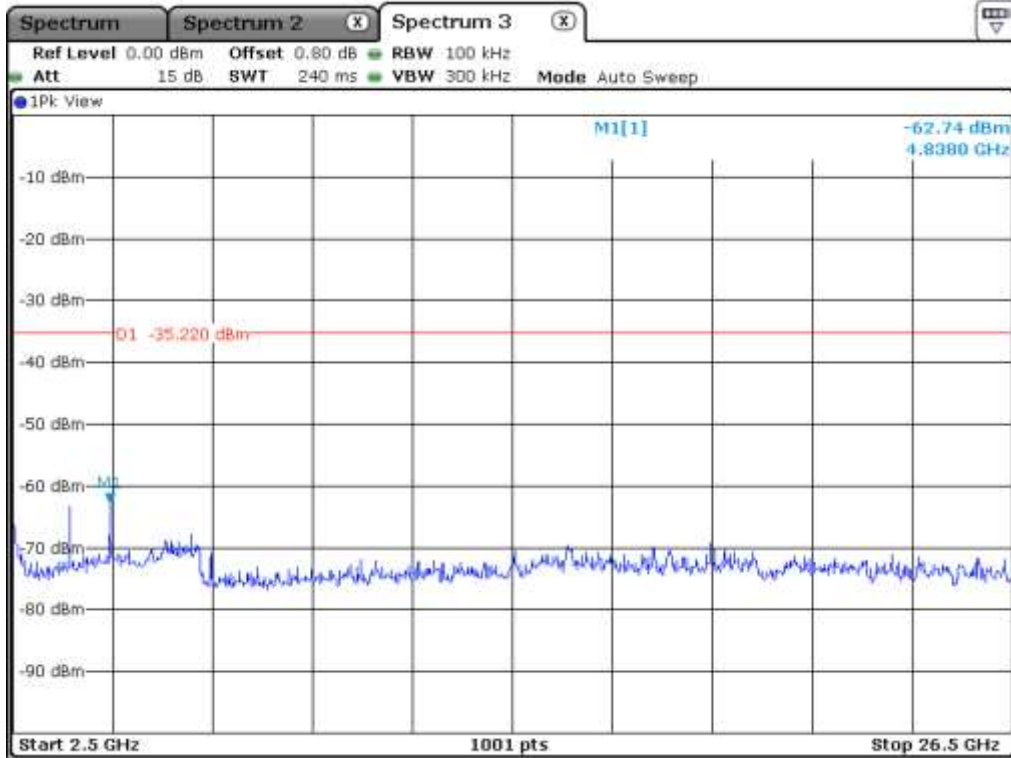


Low Channel

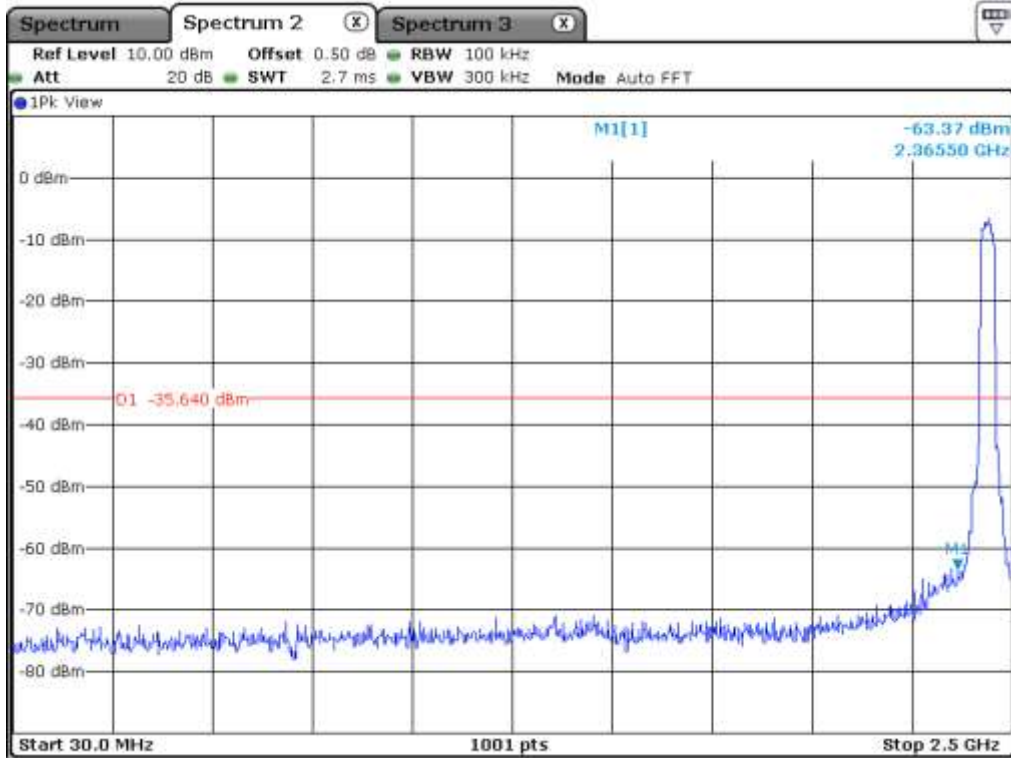


Middle Channel

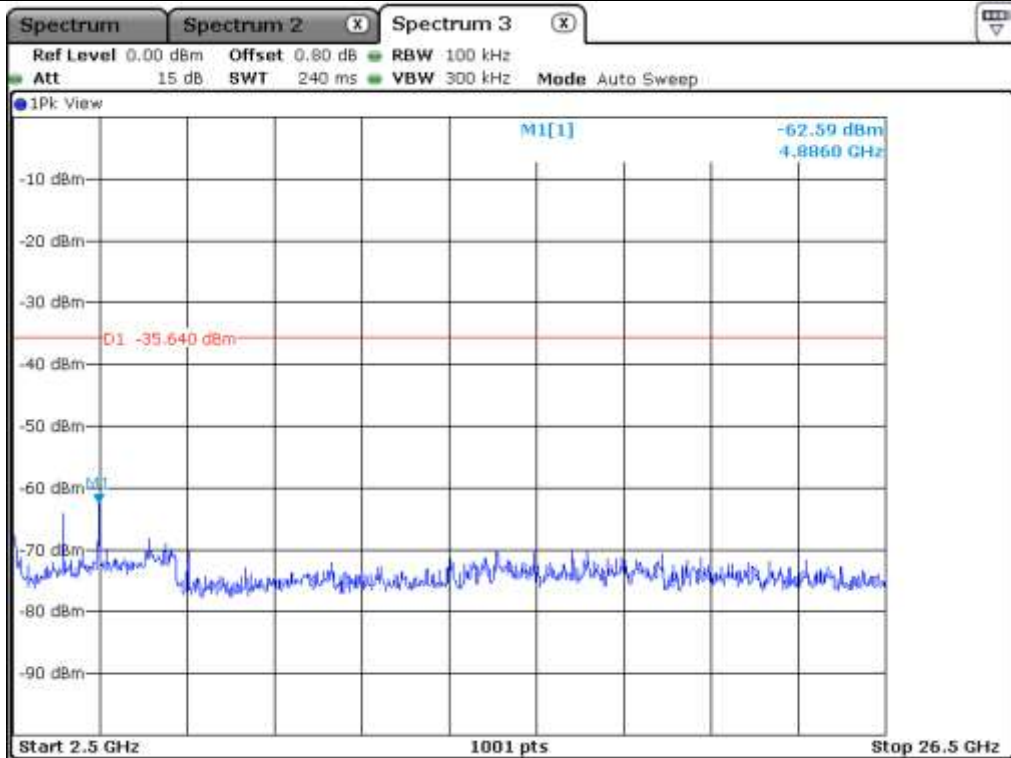


Middle Channel

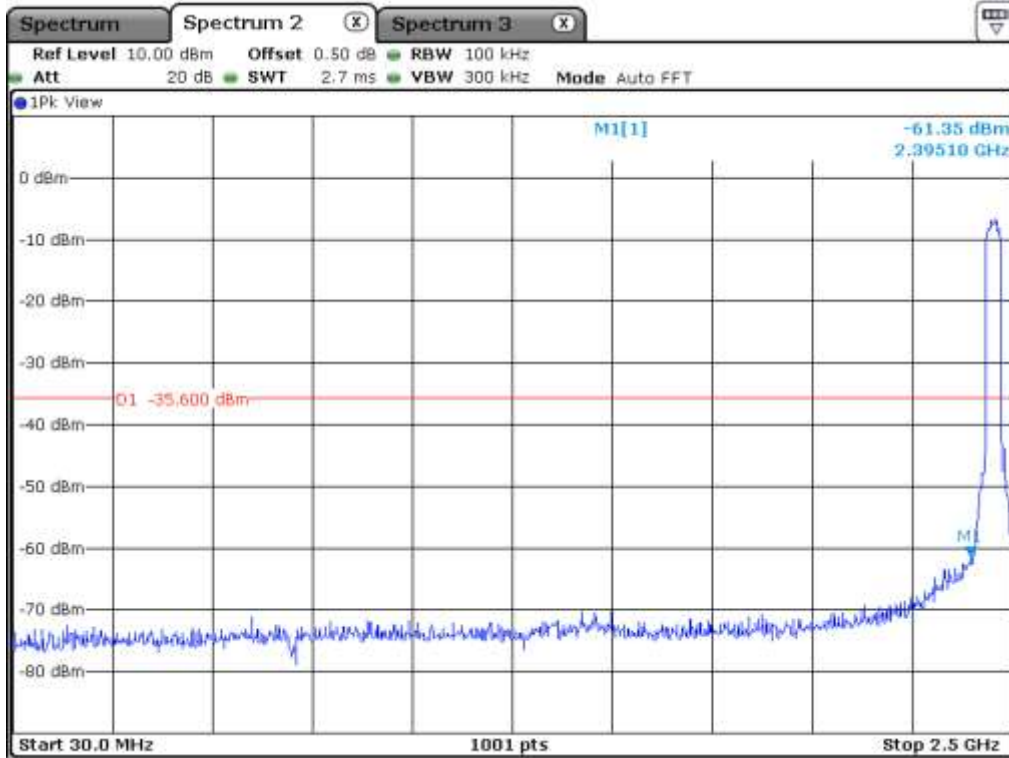


High Channel 9

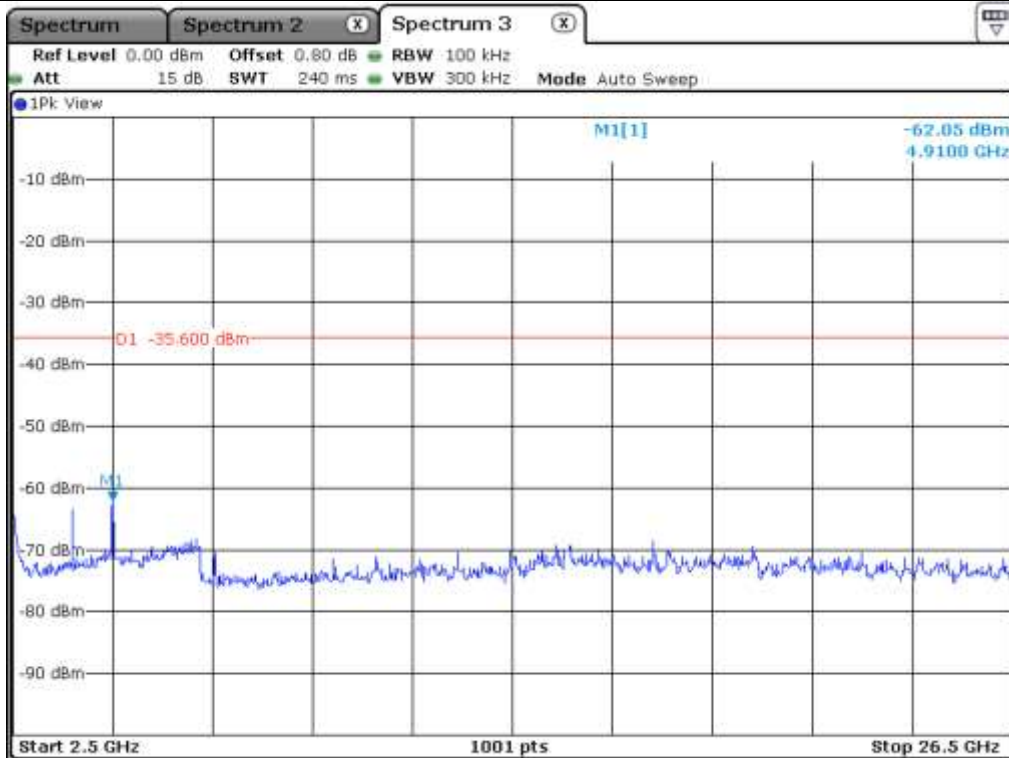


High Channel 9

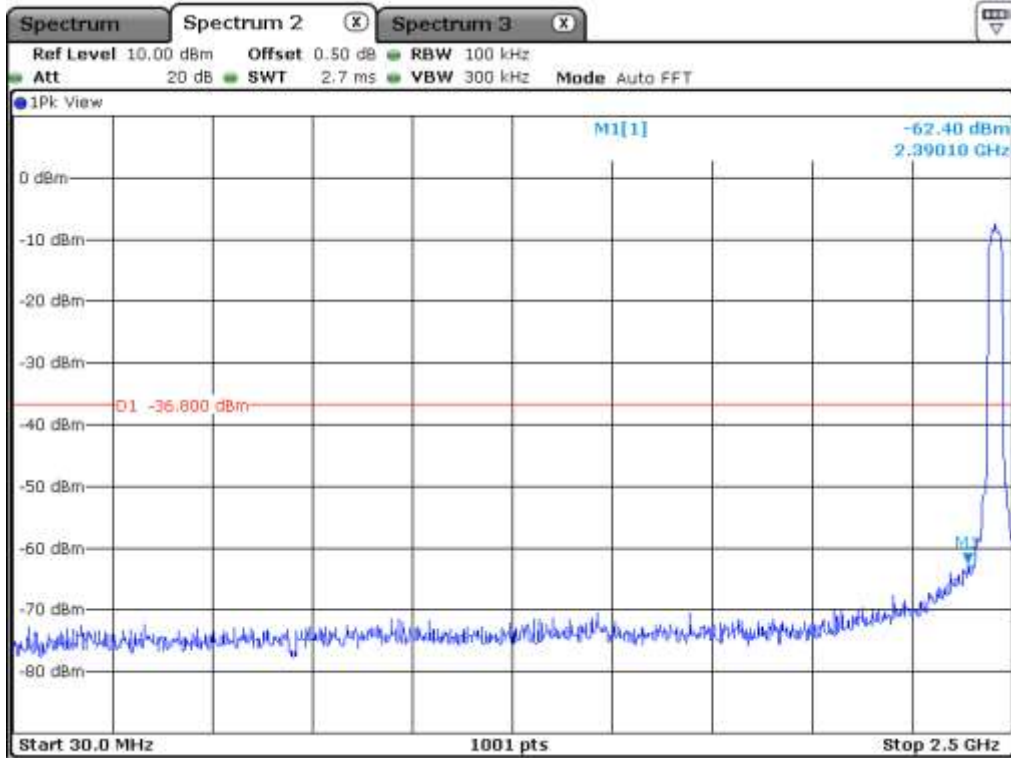


High Channel 10

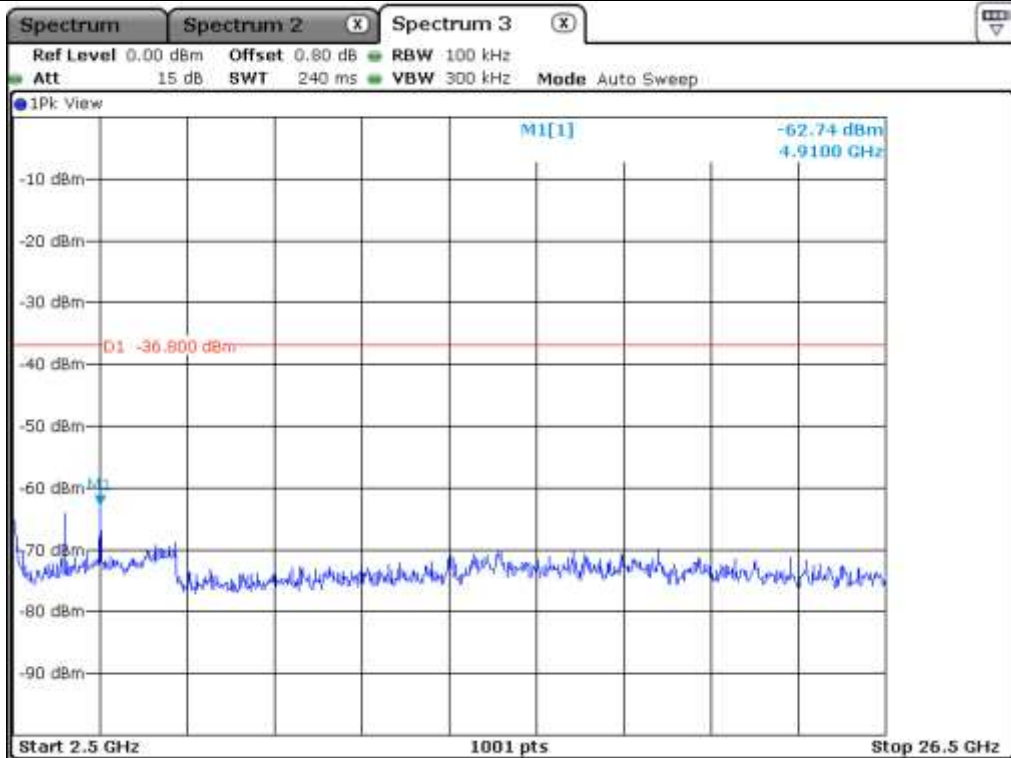

High Channel 10

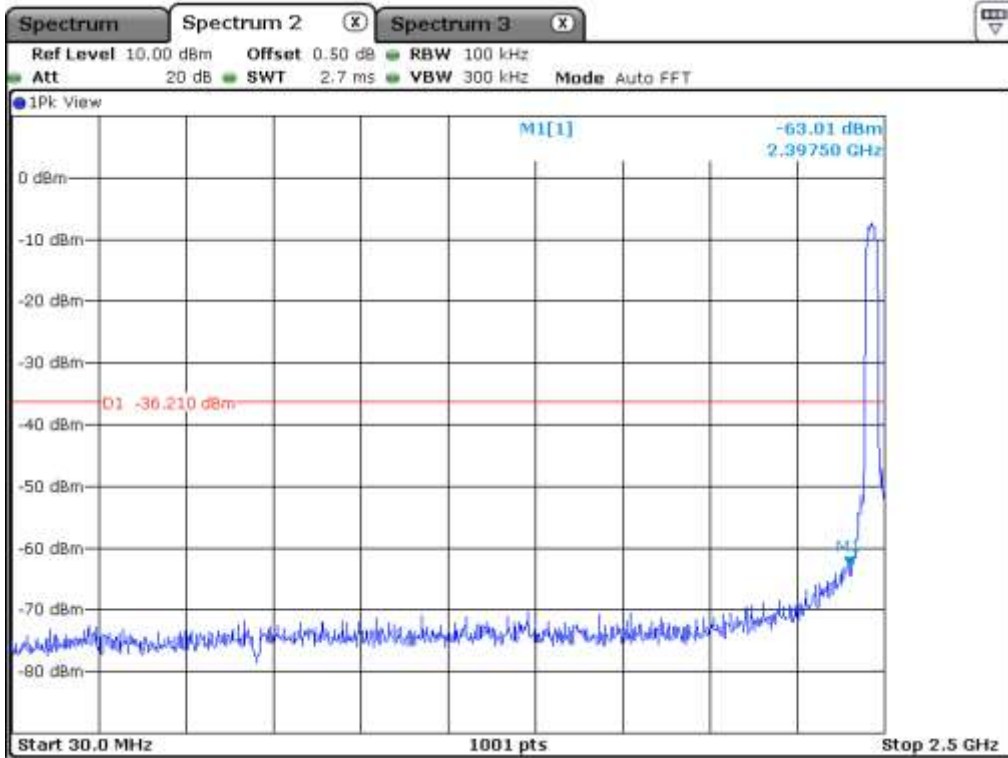


High Channel 11

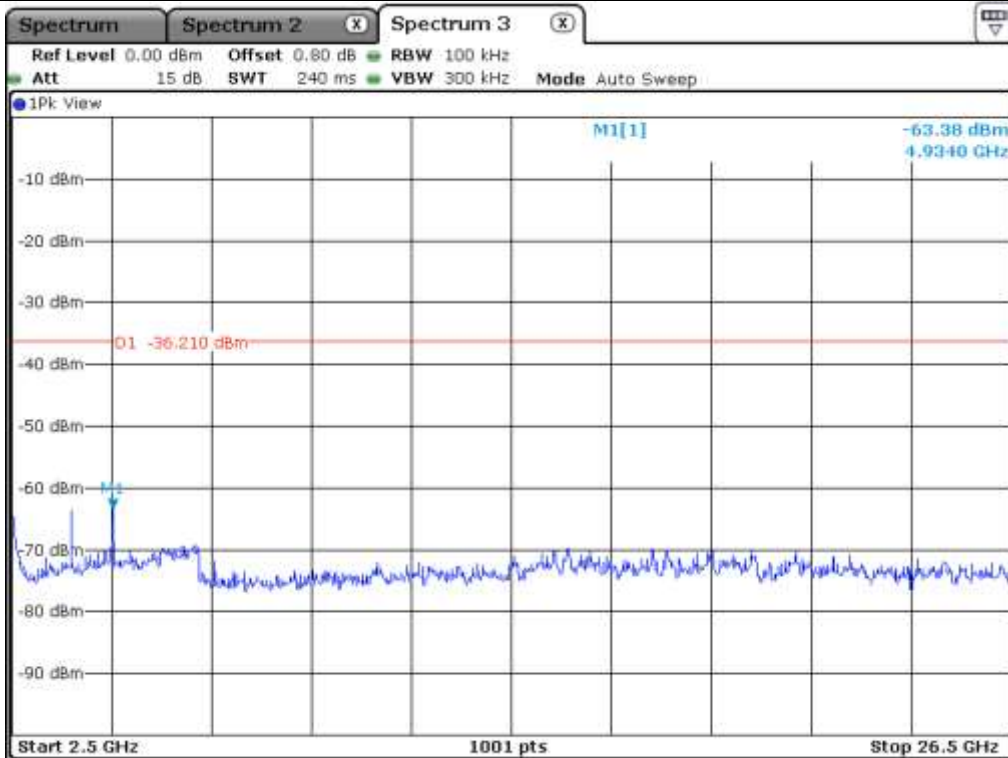


High Channel 11


9.5.4.2 Test data for Antenna 1

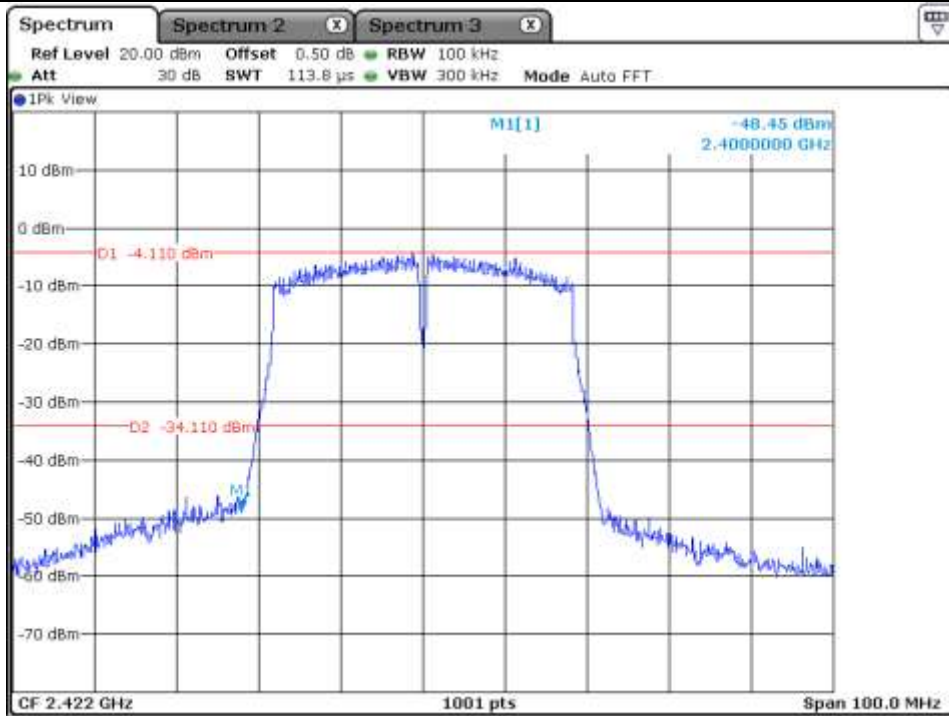


Low Channel

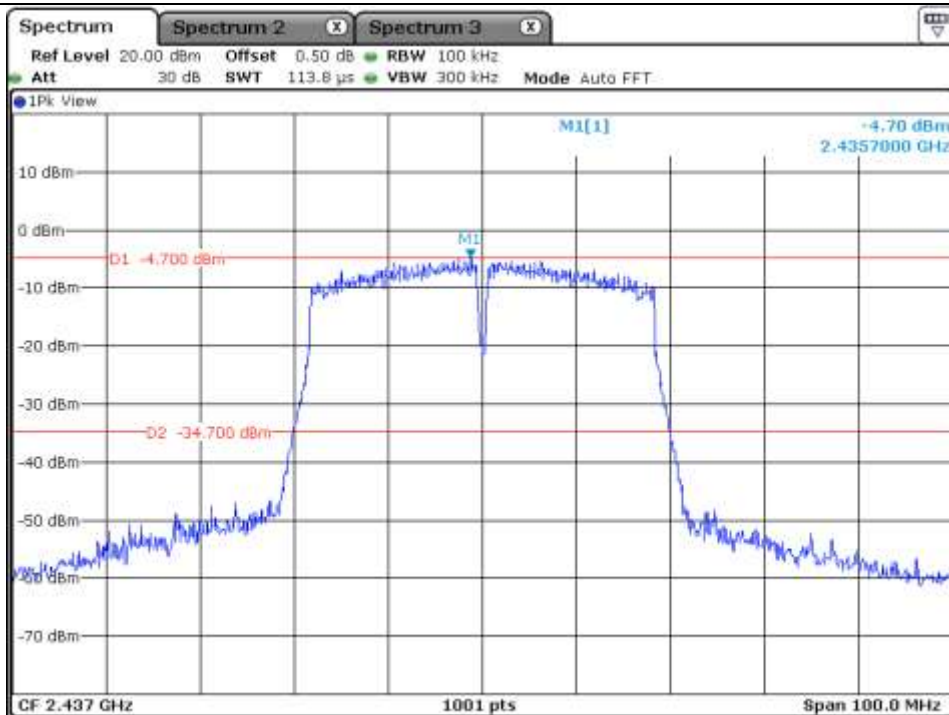


Middle Channel

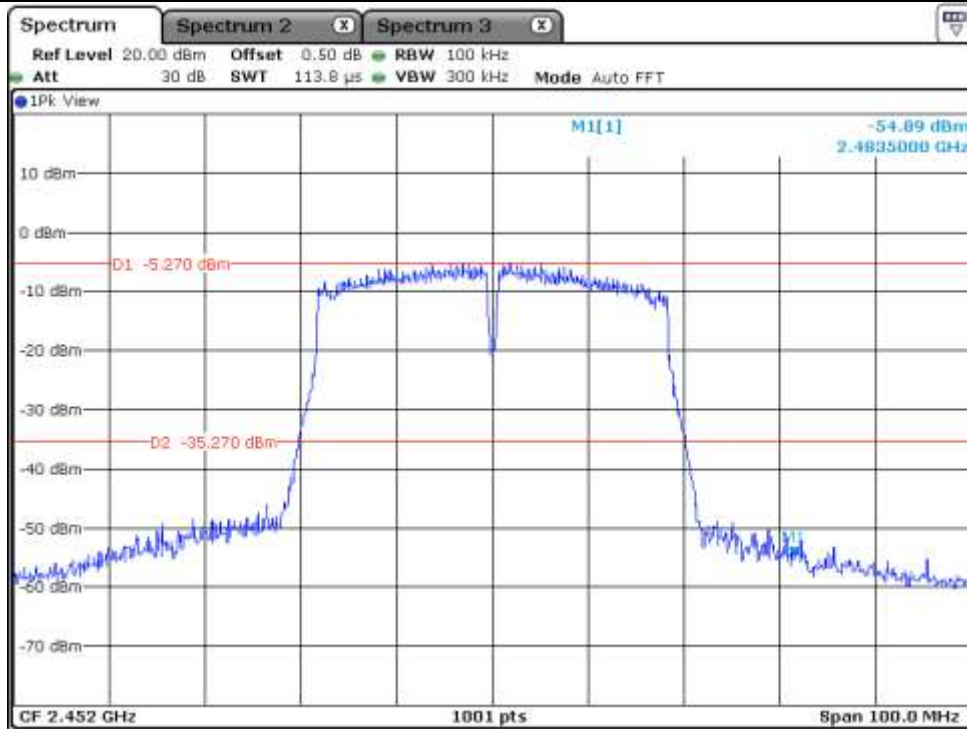


High Channel 9

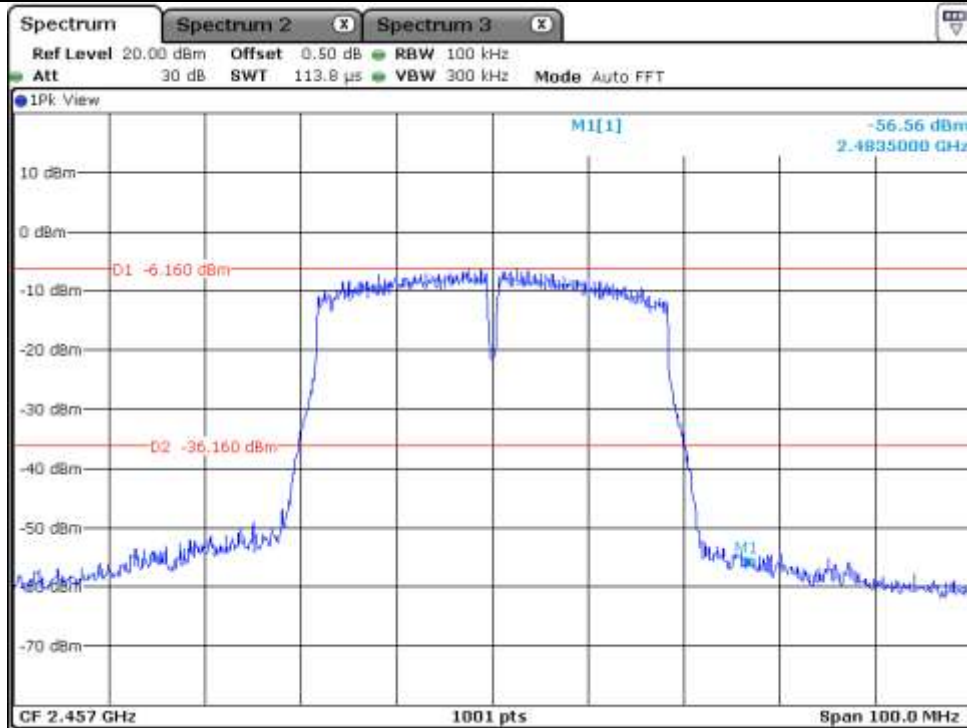


High Channel 10

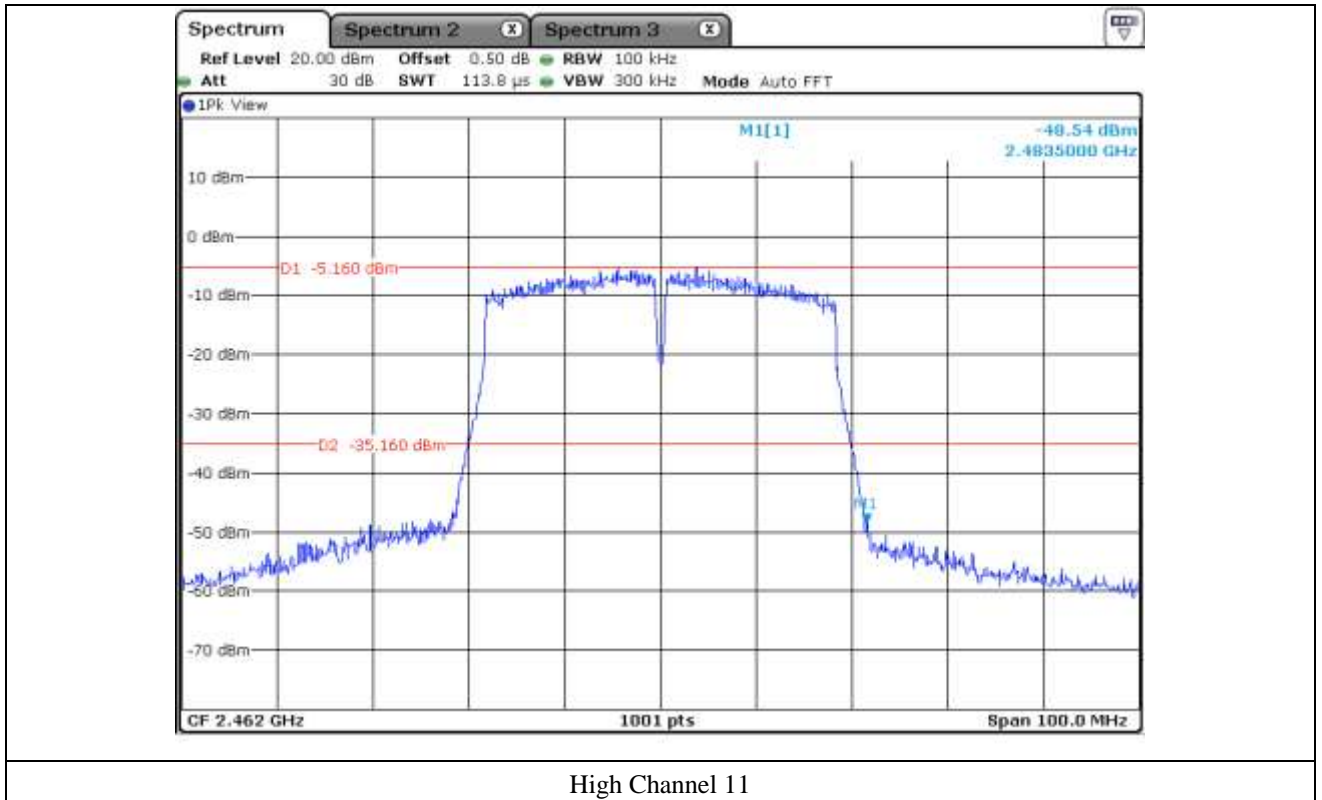


High Channel 11

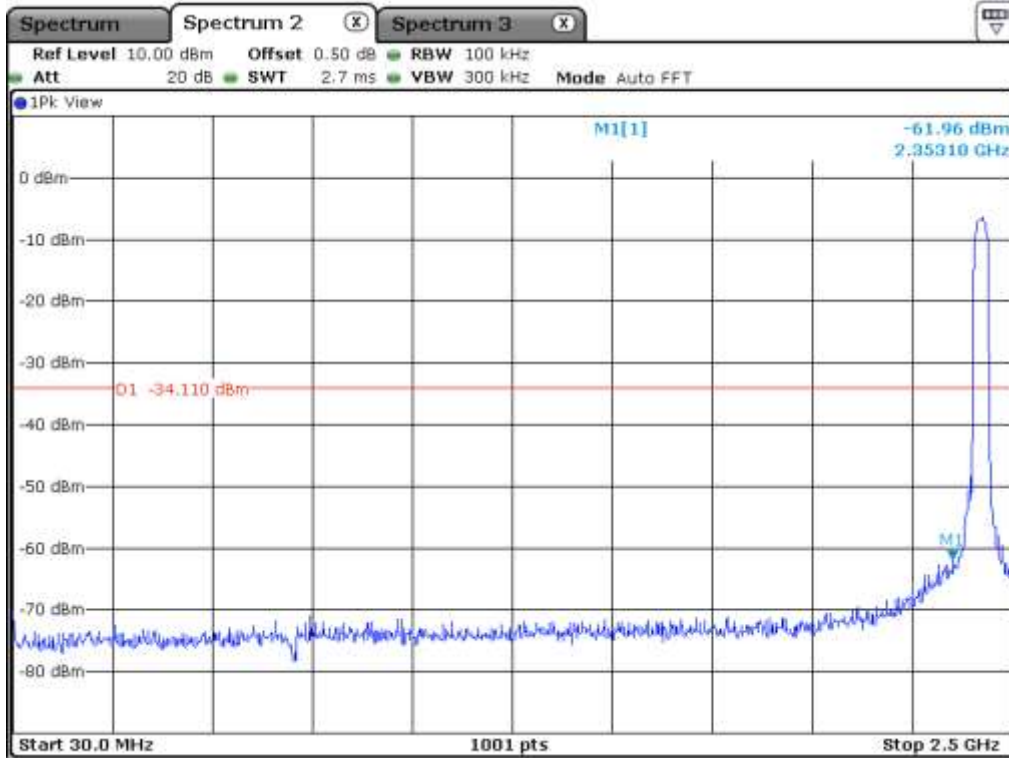


Low Channel

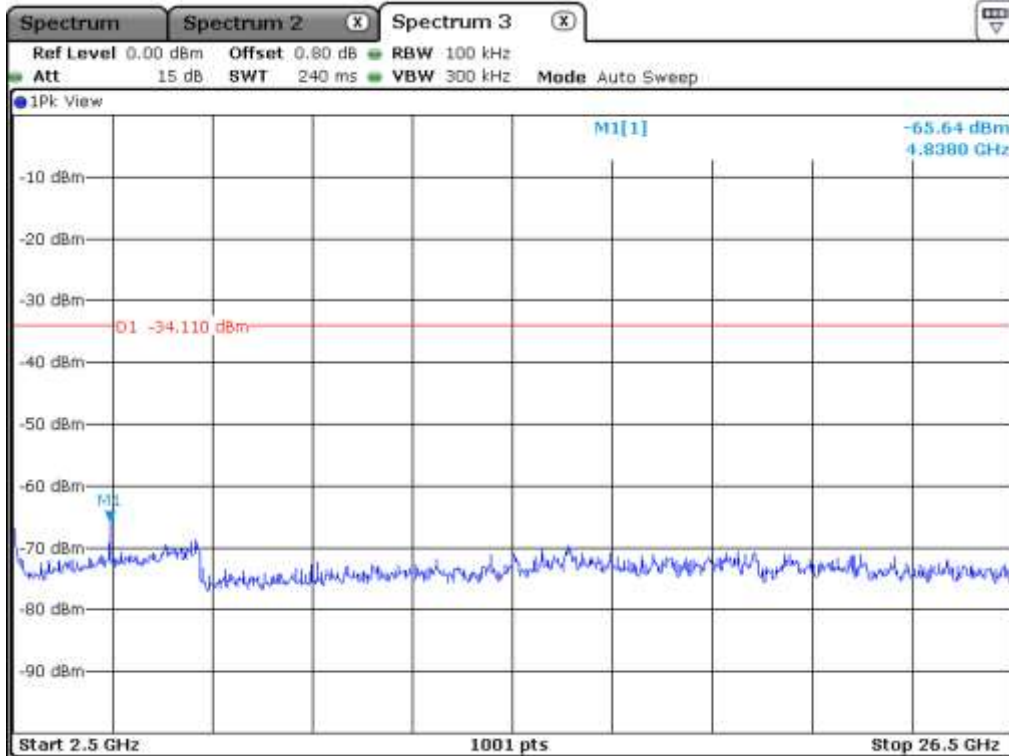


Low Channel

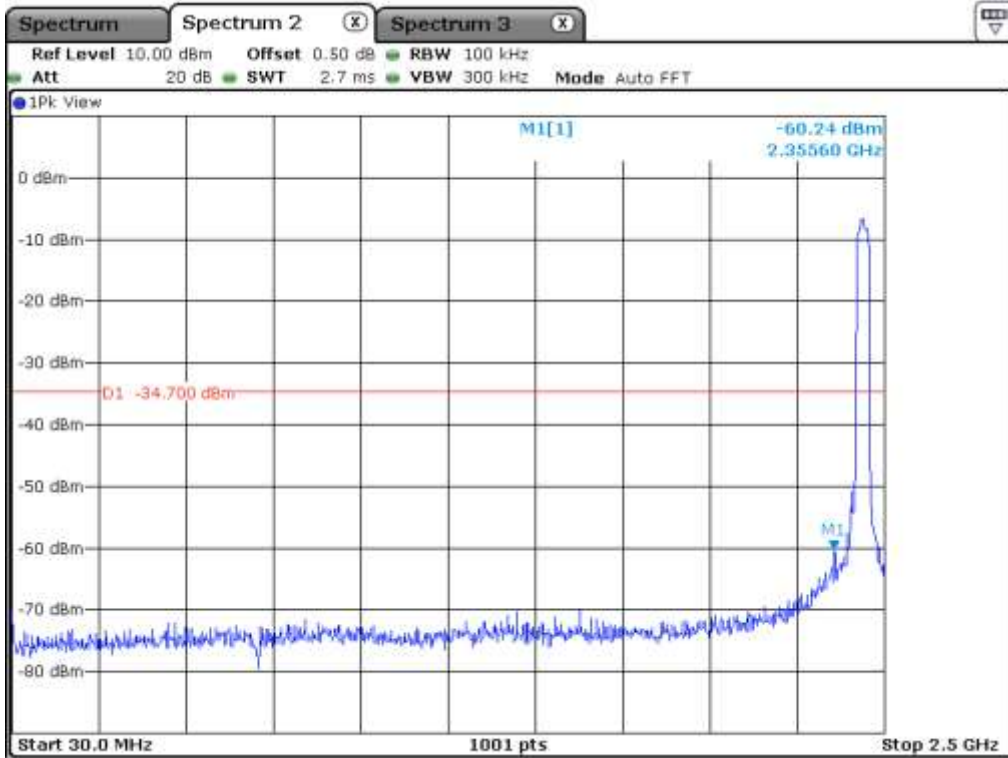


Middle Channel

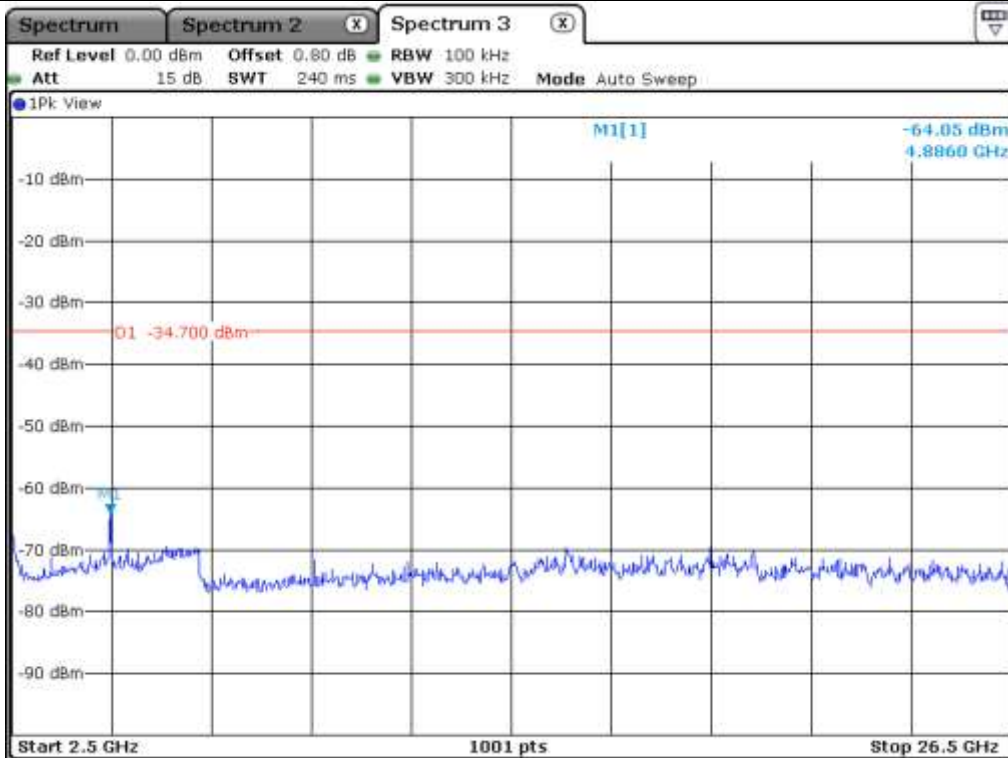


Middle Channel

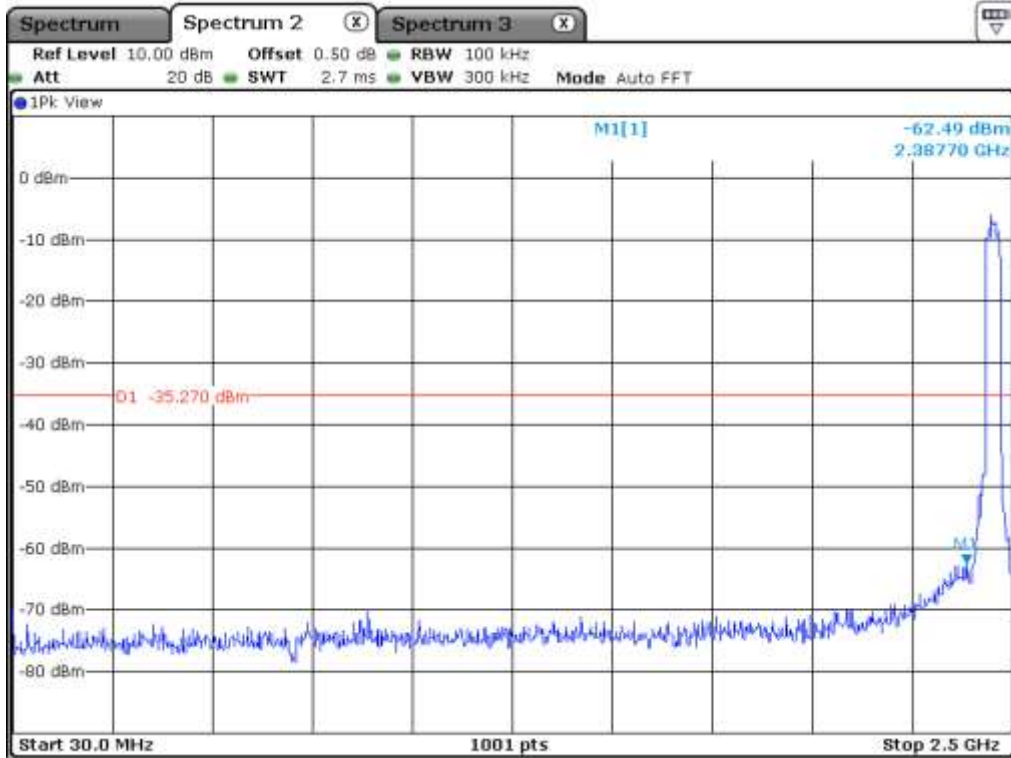


High Channel 9

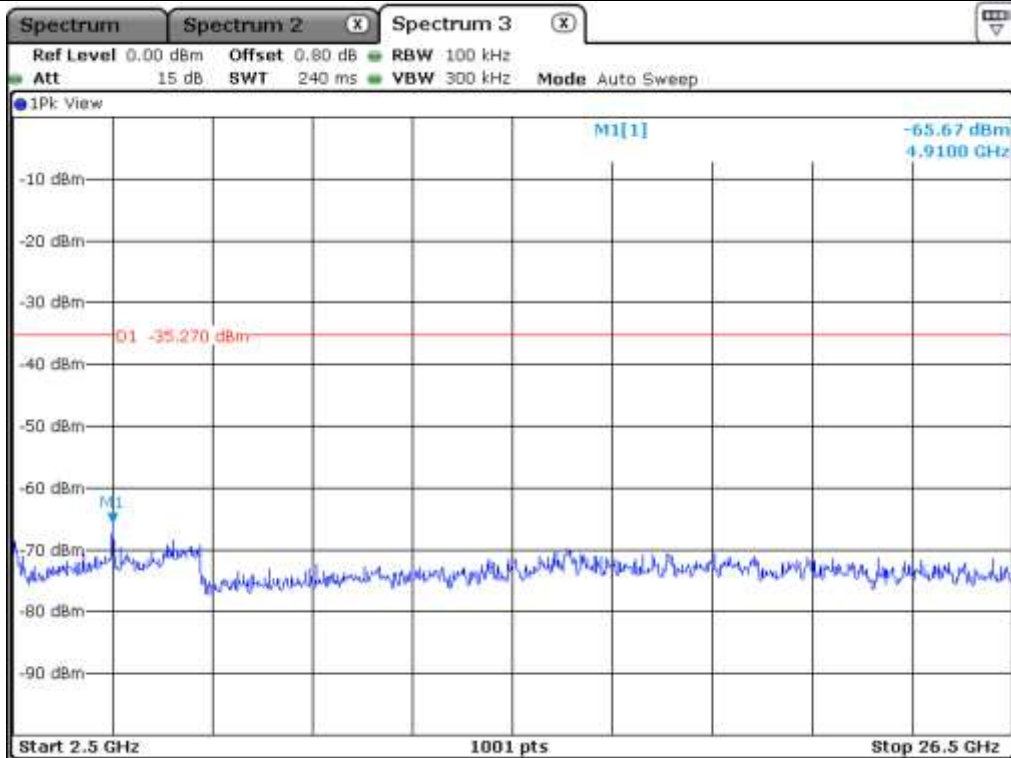


High Channel 9

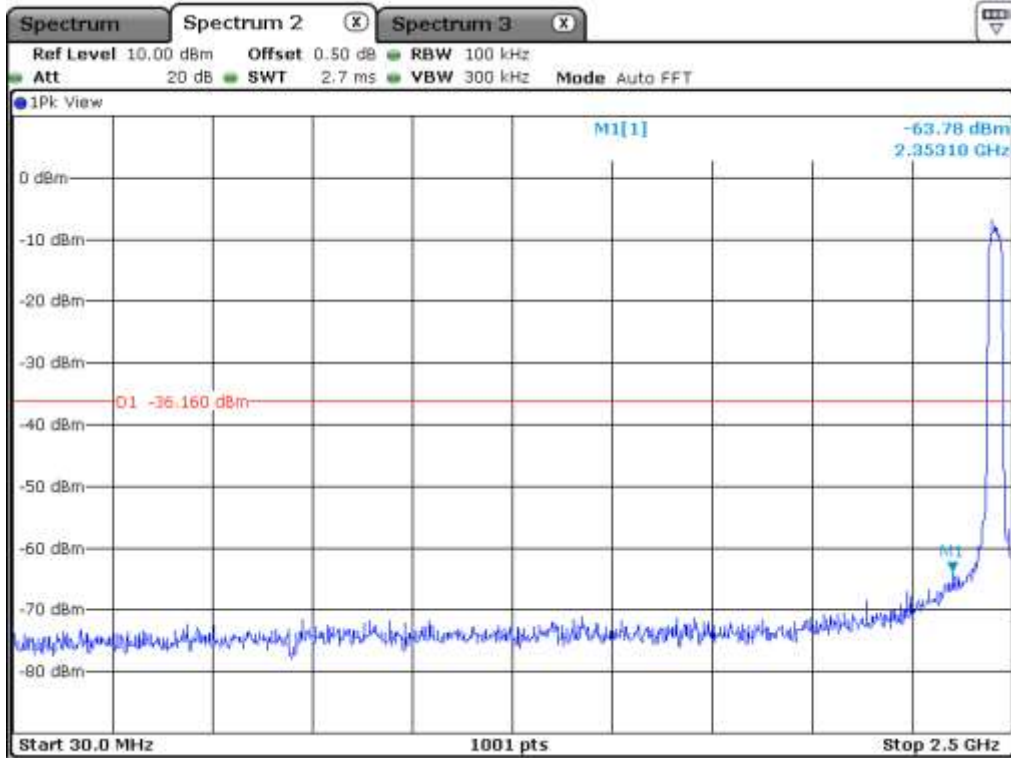


High Channel 10

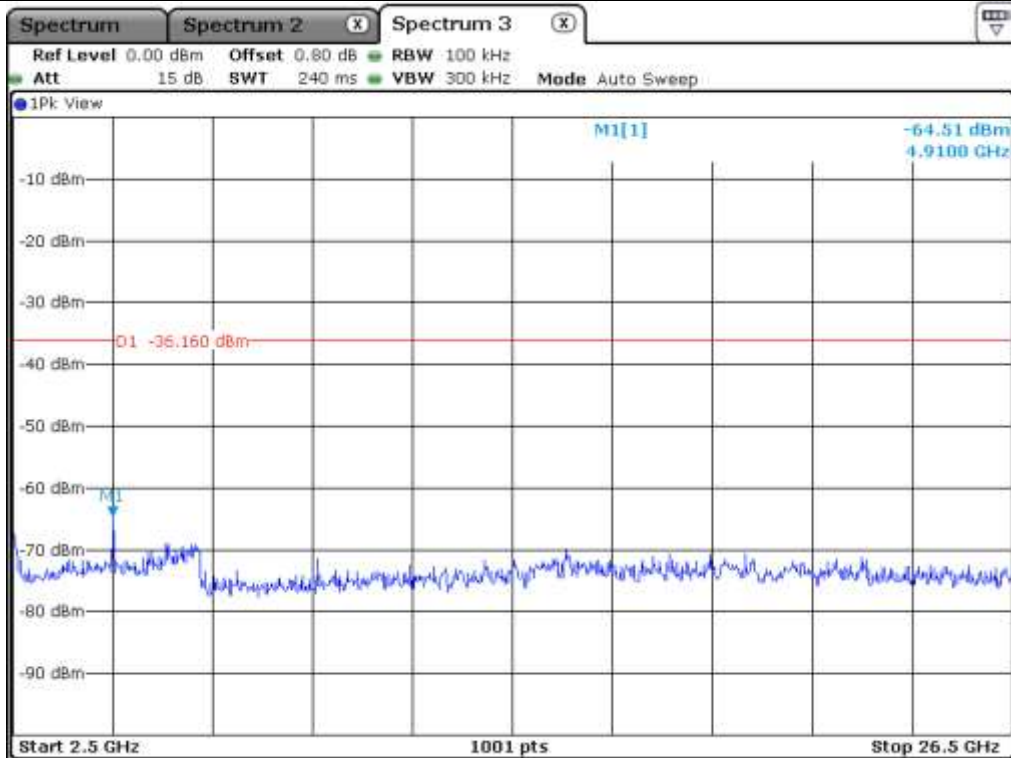

High Channel 10

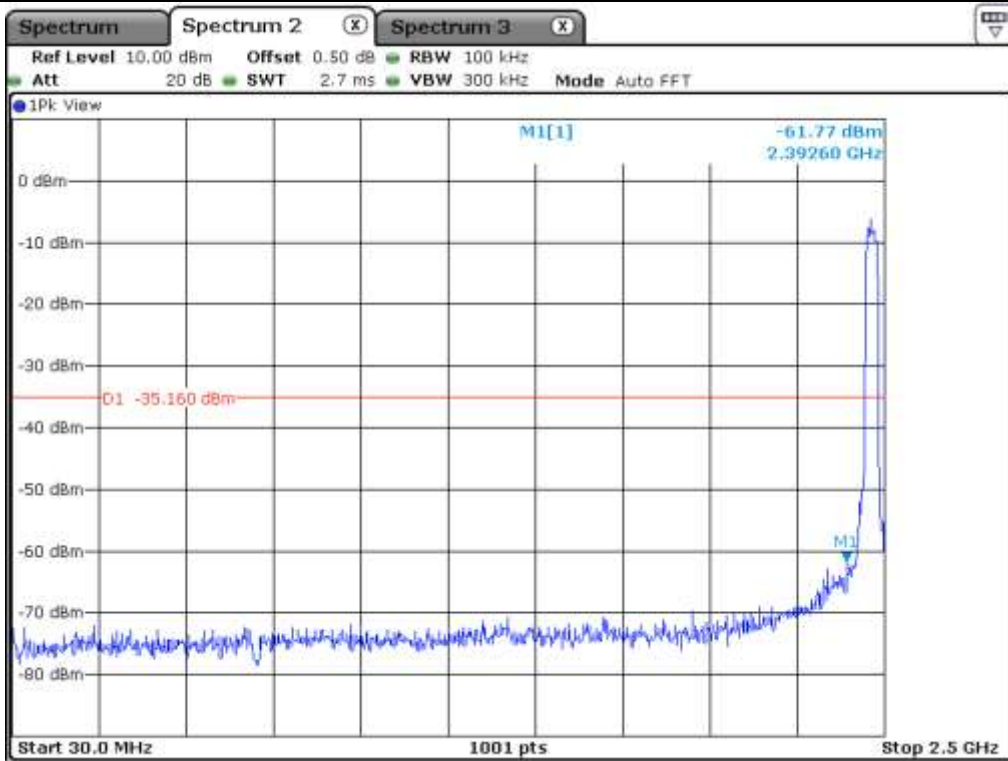

High Channel 11

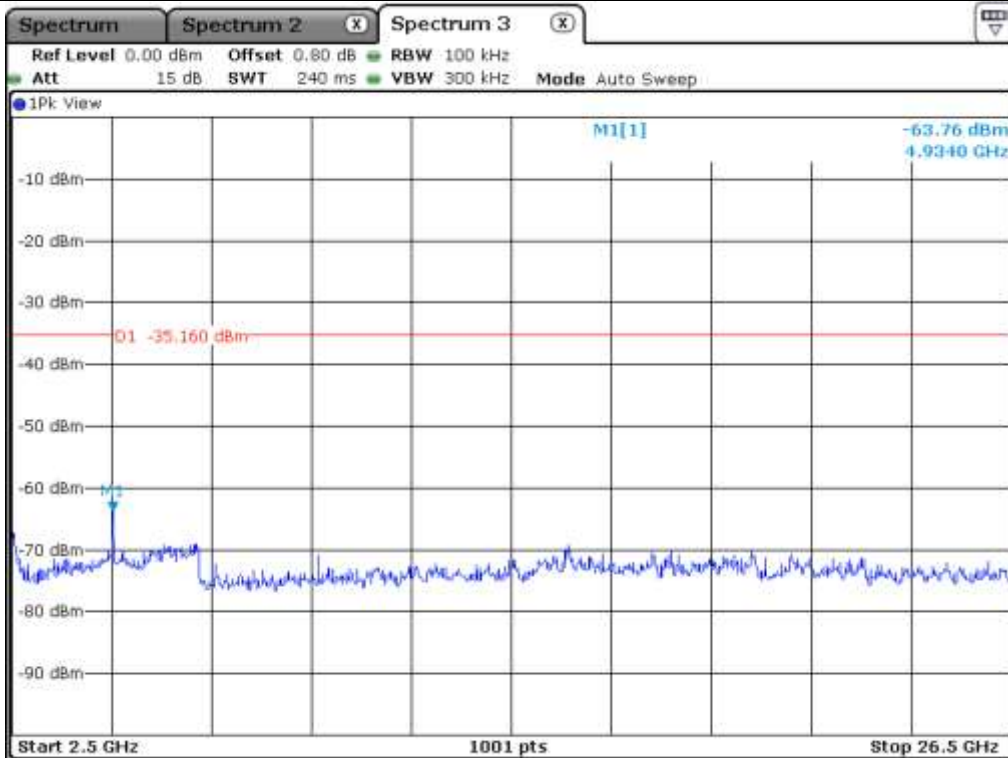

High Channel 11