

ELECTROMAGNETIC EMISSION COMPLIANCE REPORT FOR LOW-POWER, NON-LICENSED TRANSMITTER

Test Report No. : OT-209-RWD-049

Reception No. : 2008003235

Applicant : Samsung Electronics Co Ltd

Address : 19 Chapin Rd., Building D, Pine Brook, New Jersey, 07058, United States

Manufacturer : Samsung Electronics Co Ltd

Address : 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do 16677, Korea

Type of Equipment : Wi-Fi/BT Transceiver

FCC ID. : A3LWCA731M

Model Name : WCA731M

Multiple Model Name : WCA734M

Serial number : N/A

Total page of Report : 288 pages (including this page)

Date of Incoming : August 20, 2020

Date of issue : September 21, 2020

SUMMARY

The equipment complies with the regulation; **FCC PART 15 SUBPART E Section 15.407**

This test report only contains the result of a single test of the sample supplied for the examination.

It is not a generally valid assessment of the features of the respective products of the mass-production.

Tested by
Ju Yun Park / Assistant Manager
ONETECH Corp.

Reviewed by
Tae-Ho, Kim / Senior Manager
ONETECH Corp.

Approved by
Ki-Hong, Nam / General Manager
ONETECH Corp.

CONTENTS

	PAGE
1. VERIFICATION OF COMPLIANCE	9
2. TEST SUMMARY.....	10
2.1 TEST ITEMS AND RESULTS	10
2.2 ADDITIONS, DEVIATIONS, EXCLUSIONS FROM STANDARDS.....	10
2.3 RELATED SUBMITTAL(S) / GRANT(S)	10
2.4 PURPOSE OF THE TEST	10
2.5 TEST METHODOLOGY.....	10
2.6 TEST FACILITY.....	10
3. GENERAL INFORMATION.....	11
3.1 PRODUCT DESCRIPTION.....	11
3.2 ALTERNATIVE TYPE(S)/MODEL(S); ALSO COVERED BY THIS TEST REPORT.	16
4. EUT MODIFICATIONS.....	16
5. SYSTEM TEST CONFIGURATION	17
5.1 JUSTIFICATION	17
5.2 PERIPHERAL EQUIPMENT	17
5.3 MODE OF OPERATION DURING THE TEST	18
5.4 CONFIGURATION OF TEST SYSTEM.....	45
5.5 ANTENNA REQUIREMENT	45
6. PRELIMINARY TEST	45
6.1 AC POWER LINE CONDUCTED EMISSIONS TESTS.....	45
6.2 GENERAL RADIATED EMISSIONS TESTS	45
7. MIMUM 26 DB BANDWIDTH	46
7.1 OPERATING ENVIRONMENT	46
7.2 TEST SET-UP	46
7.3 TEST DATE	46
7.4 TEST DATA FOR 802.11A RLAN MODE.....	47
7.4.1 Test data for Antenna 0	47
7.4.2 Test data for Antenna 1	56
7.4.3 Test data for Staddle Channel_Antenna 0	65
7.4.4 Test data for Staddle Channel_Antenna 1	66
7.5 TEST DATA FOR 802.11N_HT20 RLAN MODE.....	67
7.5.1 Test data for Antenna 0	67

<i>7.5.2 Test data for Antenna 1</i>	76
<i>7.4.3 Test data for Staddle Channel_Antenna 0</i>	85
<i>7.4.4 Test data for Staddle Channel_Antenna 1</i>	86
7.6 TEST DATA FOR 802.11N_HT40 RLAN MODE	87
<i> 7.6.1 Test data for Antenna 0</i>	87
<i> 7.6.2 Test data for Antenna 1</i>	93
<i> 7.6.3 Test data for Staddle Channel_Antenna 0</i>	99
<i> 7.6.4 Test data for Staddle Channel_Antenna 1</i>	100
7.7 TEST DATA FOR 802.11AC_VHT80 RLAN MODE	101
<i> 7.7.1 Test data for Antenna 0</i>	101
<i> 7.7.2 Test data for Antenna 1</i>	104
<i> 7.7.3 Test data for Staddle Channel_Antenna 0</i>	107
<i> 7.7.4 Test data for Staddle Channel_Antenna 1</i>	108
8.6 DB BANDWIDTH	109
8.1 OPERATING ENVIRONMENT	109
8.2 TEST SET-UP	109
8.3 TEST DATE	109
8.4 TEST DATA FOR 802.11A RLAN MODE	110
<i> 8.4.1 Test data for Antenna 0</i>	110
<i> 8.4.2 Test data for Antenna 1</i>	112
8.5 TEST DATA FOR 802.11N_HT20 RLAN MODE	114
<i> 8.5.1 Test data for Antenna 0</i>	114
<i> 8.5.2 Test data for Antenna 1</i>	116
8.6 TEST DATA FOR 802.11N_HT40 RLAN MODE	118
<i> 8.6.1 Test data for Antenna 0</i>	118
<i> 8.6.2 Test data for Antenna 1</i>	120
8.7 TEST DATA FOR 802.11AC_VHT80 RLAN MODE	122
<i> 8.7.1 Test data for Antenna 0</i>	122
<i> 8.7.2 Test data for Antenna 1</i>	123
9. MAXIMUM PEAK OUTPUT POWER	124
9.1 OPERATING ENVIRONMENT	124
9.2 TEST SET-UP	124
9.3 TEST DATE	124
9.4 TEST DATA FOR 802.11A RLAN MODE	125
<i> 9.4.1 Test data for Antenna 0</i>	125
<i> 9.4.2 Test data for Antenna 1</i>	126
<i> 9.4.3 Test data for Multiple Transmit</i>	127

9.4.4 Test data for Staddle Channel_Antenna 0	128
9.4.5 Test data for Staddle Channel_Antenna 1	128
9.4.6 Test data for Staddle Channel_Multiple Transmit	128
9.5 TEST DATA FOR 802.11N_HT20 RLAN MODE	129
 9.5.1 Test data for Antenna 0	129
 9.5.2 Test data for Antenna 1	130
 9.5.3 Test data for Multiple Transmit	131
 9.5.4 Test data for Staddle Channel_Antenna 0	132
 9.5.5 Test data for Staddle Channel_Antenna 1	132
 9.5.6 Test data for Staddle Channel_Multiple Transmit	132
9.6 TEST DATA FOR 802.11N_HT40 RLAN MODE	133
 9.6.1 Test data for Antenna 0	133
 9.6.2 Test data for Antenna 1	133
 9.6.3 Test data for Multiple Transmit	134
 9.6.4 Test data for Staddle Channel_Antenna 0	135
 9.6.5 Test data for Staddle Channel_Antenna 1	135
 9.6.6 Test data for Staddle Channel_Multiple Transmit	135
9.7 TEST DATA FOR 802.11AC_HT80 RLAN MODE.....	136
 9.7.1 Test data for Antenna 0	136
 9.7.2 Test data for Antenna 1	136
 9.7.3 Test data for Multiple Transmit	136
 9.7.4 Test data for Staddle Channel_Antenna 0	137
 9.7.5 Test data for Staddle Channel_Antenna 1	137
 9.7.6 Test data for Staddle Channel_Multiple Transmit	137
10. PEAK POWER SPECTRUL DENSITY	138
10.1 OPERATING ENVIRONMENT	138
10.2 TEST SET-UP	138
10.3 TEST DATE	138
10.4 TEST DATA FOR 802.11A RLAN MODE.....	139
 10.4.1 Test data for Antenna 0	139
 10.4.2 Test data for Antenna 1	148
 10.4.3 Test data for Multiple Transmit	157
 10.4.4 Test data for Staddle Channel_Antenna 0	158
 10.4.5 Test data for Staddle Channel_Antenna 1	160
 10.4.6 Test data for Staddle Channel_Multiple Transmit	162
10.5 TEST DATA FOR 802.11N_HT20 RLAN MODE.....	163
 10.5.1 Test data for Antenna 0	163

<i>10.5.2 Test data for Antenna 1</i>	172
<i>10.5.3 Test data for Multiple Transmit</i>	181
<i>10.5.4 Test data for Staddle Channel_Antenna 0</i>	182
<i>10.5.5 Test data for Staddle Channel_Antenna 1</i>	184
<i>10.5.6 Test data for Staddle Channel_Multiple Transmit</i>	186
10.6 TEST DATA FOR 802.11N_HT40 RLAN MODE	187
<i>10.6.1 Test data for Antenna 0</i>	187
<i>10.6.2 Test data for Antenna 1</i>	193
<i>10.6.3 Test data for Multiple Transmit</i>	199
<i>10.6.4 Test data for Staddle Channel_Antenna 0</i>	200
<i>10.6.5 Test data for Staddle Channel_Antenna 1</i>	202
<i>10.6.6 Test data for Staddle Channel_Multiple Transmit</i>	204
10.7 TEST DATA FOR 802.11AC_HT80 RLAN MODE.....	205
<i>10.7.1 Test data for Antenna 0</i>	205
<i>10.7.2 Test data for Antenna 1</i>	208
<i>10.7.3 Test data for Multiple Transmit</i>	211
<i>10.7.4 Test data for Staddle Channel_Antenna 0</i>	212
<i>10.7.5 Test data for Staddle Channel_Antenna 1</i>	214
<i>10.7.6 Test data for Staddle Channel_Multiple Transmit</i>	216
11. FREQUENCY STABILITY WITH TEMPERATURE VARIATION.....	217
11.1 OPERATING ENVIRONMENT	217
11.2 TEST SET-UP	217
11.3 TEST DATE	217
11.4 TEST DATA FOR U-NII-1	218
11.5 TEST DATA FOR U-NII-2A.....	219
11.6 TEST DATA FOR U-NII-2C.....	220
11.7 TEST DATA FOR U-NII-3	221
12. FREQUENCY STABILITY WITH VOLTAGE VARIATION.....	222
12.1 OPERATING ENVIRONMENT	222
12.2 TEST SET-UP	222
12.3 TEST DATE	222
12.4 TEST DATA FOR U-NII-1	223
12.5 TEST DATA FOR U-NII-2A.....	223
12.6 TEST DATA FOR U-NII-2C.....	224
12.7 TEST DATA FOR U-NII-3	224
13. RADIATED SPURIOUS EMISSIONS	225
13.1 OPERATING ENVIRONMENT	225

13.2 TEST SET-UP FOR CONDUCTED MEASUREMENT	225
13.3 TEST DATE	225
13.4 TEST DATA FOR BELOW 30 MHZ	225
13.5 TEST DATA FOR 30 MHZ ~ 1000 MHZ	226
13.5.1 Test data for Basic Model (WCA731M)	226
13.5.2 Test data for Multiple Model (WCA734M)	229
13.6 Test data for Above 1 GHz.....	232
13.6.1 Test data for Frequency UNII 1	232
13.6.2 Test data for Frequency UNII 2A	235
13.6.3 Test data for Frequency UNII 2C	239
13.6.4 Test data for Frequency UNII 3	243
14. RADIATED RESTRICTED BAND EDGE MEASUREMENTS	247
14.1 OPERATING ENVIRONMENT	247
14.2 TEST SET-UP FOR CONDUCTED MEASUREMENT	247
14.3 TEST DATE	247
14.4 TEST DATA FOR FREQUENCY UNII 1	248
14.4.1 Test data for 802.11a RLAN Mode	248
14.4.2 Test data for 802.11n_HT20 RLAN Mode	248
14.4.3 Test data for 802.11n_HT40 RLAN Mode	249
14.4.4 Test data for 802.11ac_HT80 RLAN Mode	249
14.5 TEST DATA FOR FREQUENCY UNII 2A.....	250
14.5.1 Test data for 802.11a RLAN Mode	250
14.5.2 Test data for 802.11n_HT20 RLAN Mode	250
14.5.3 Test data for 802.11n_HT40 RLAN Mode	251
14.5.4 Test data for 802.11ac_HT80 RLAN Mode	251
14.6 TEST DATA FOR FREQUENCY UNII 2C.....	252
14.6.1 Test data for 802.11a RLAN Mode	252
14.6.2 Test data for 802.11n_HT20 RLAN Mode	252
14.6.3 Test data for 802.11n_HT40 RLAN Mode	253
14.6.4 Test data for 802.11ac_HT80 RLAN Mode	253
14.7 TEST DATA FOR FREQUENCY U-NII-3.....	254
14.7.1 Test data for 802.11a RLAN Mode	254
14.7.2 Test data for 802.11n_HT20 RLAN Mode	256
14.7.3 Test data for 802.11n_HT40 RLAN Mode	258
14.7.4 Test data for 802.11ac_HT80 RLAN Mode	260
14.8 U-NII-3 EMISSION LIMITS	262
15. CONDUCTED EMISSION TEST.....	263

15.1 OPERATING ENVIRONMENT	263
15.2 TEST SET-UP	263
15.3 TEST DATE	263
15.4 TEST DATA FOR BASIC MODEL (WCA731M).....	264
<i> 15.4.1 Test data for WLAN 5 GHz</i>	264
<i> 15.4.2 Test data for Intermodulation Mode(Bluetooth LE + WLAN 2.4 GHz + WLAN 5 GHz).....</i>	266
<i> 15.4.3 Test data for Intermodulation Mode(Bluetooth + WLAN 2.4 GHz + WLAN 5 GHz)</i>	268
15.5 TEST DATA FOR MULTIPLE MODEL (WCA734M).....	270
<i> 15.5.1 Test data for WLAN 5 GHz</i>	270
<i> 15.5.2 Test data for Intermodulation Mode(Bluetooth LE + WLAN 2.4 GHz + WLAN 5 GHz).....</i>	272
<i> 15.5.3 Test data for Intermodulation Mode(Bluetooth + WLAN 2.4 GHz + WLAN 5 GHz)</i>	274
16. DYNAMIC FREQUENCY SELECTION (DFS)	276
16.1 OPERATING ENVIRONMENT	276
16.2 TEST SET-UPS	276
16.3 DFS TEST SIGNALS	278
16.4 TECHNICAL REQUIREMENT SPECIFICATION	279
16.5 TEST DATE	279
16.6 TEST DATA.....	280
<i> 16.6.1 UNII 2A.....</i>	280
<i> 16.6.1.1 Plot of Radar waveform type 0</i>	280
<i> 16.6.1.2 No traffic signal(master signal).....</i>	281
<i> 16.6.1.3 Client(EUT) Data Traffic Signal.....</i>	282
<i> 16.6.1.4 Channel move and Channel Closing transmission time.....</i>	283
<i> 16.6.2 UNII 3</i>	284
<i> 16.6.2.1 Plot of Radar waveform type 0</i>	284
<i> 16.6.2.2 No traffic signal(master signal).....</i>	285
<i> 16.6.2.3 Client(EUT) Data Traffic Signal.....</i>	286
<i> 16.6.2.4 Channel move and Channel Closing transmission time.....</i>	287
17. LIST OF TEST EQUIPMENT	288

Revision History

Rev. No.	Issue Report No.	Issued Date	Revisions	Section Affected
0	OT-209-RWD-049	September 21, 2020	Initial Release	All

1. VERIFICATION OF COMPLIANCE

Applicant : Samsung Electronics Co Ltd
Address : 19 Chapin Rd., Building D, Pine Brook, New Jersey, 07058, United States
Contact Person : Youngjoong Noh / Principal Engineer
Telephone No. : +82-31-277-0598
FCC ID : A3LWCA731M
Model Name : WCA731M

Brand Name :
Serial Number : N/A
Date : September 21, 2020

EQUIPMENT CLASS	Unlicensed National Information Infrastructure(UNII)
E.U.T. DESCRIPTION	Modular Transmitter, Wi-Fi/BT Transceiver
THIS REPORT CONCERNS	Original Grant
MEASUREMENT PROCEDURES	ANSI C63.10: 2013
TYPE OF EQUIPMENT TESTED	Pre-Production
KIND OF EQUIPMENT	Certification
AUTHORIZATION REQUESTED	
EQUIPMENT WILL BE OPERATED UNDER FCC RULES PART(S)	FCC PART 15 SUBPART E Section 15.407 789033 D02 General UNII Test Procedures New Rules v02r01
Modifications on the Equipment to Achieve Compliance	None
Final Test was Conducted On	3 m, Semi Anechoic Chamber

- The above equipment was tested by ONETECH Corp. for compliance with the requirement set forth in the FCC Rules and Regulations. This said equipment in the configuration described in this report, shows the maximum emission levels emanating from equipment are within the compliance requirements.

2. TEST SUMMARY

2.1 Test items and results

SECTION	TEST ITEMS	RESULTS
15.407(a)	26 dB Bandwidth	PASS
15.407(a)	Maximum Conducted Output Power	Met the Limit / PASS
15.407(a)	Peak Power Spectral Density	Met the Limit / PASS
15.407(a)	Peak Excursion	Met the Limit / PASS
15.407(g)	Frequency Stability	Met the Limit / PASS
15.407(b)	Undesirable Emissions	Met the Limit / PASS
15.205, 15.407(b)	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Met the Limit / PASS
15.207	AC Conducted Emissions 150 kHz-30 MHz	Met the Limit / PASS
15.407(h)	Dynamic frequency Selection	Met the Limit / PASS

2.2 Additions, deviations, exclusions from standards

No additions, deviations or exclusions have been made from standard.

2.3 Related Submittal(s) / Grant(s)

Original submittal only

2.4 Purpose of the test

To determine whether the equipment under test fulfills the requirements of the regulation stated in FCC PART 15 SUBPART E Section 15.407

2.5 Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10: 2013. Radiated testing was performed at a distance of 3 m from EUT to the antenna.

2.6 Test Facility

The Onetech Corp. has been designated to perform equipment testing in compliance with ISO/IEC 17025.

The Electromagnetic compatibility measurement facilities are located at 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea.

- Site Filing:

VCCI (Voluntary Control Council for Interference) – Registration No. R-4112/ C-14617/ G-10666/ T-11842

ISED (Innovation, Science and Economic Development Canada) – Registration No. Site# 3736A-3

KOLAS (Korea Laboratory Accreditation Scheme) - Accreditation NO. KT085

FCC (Federal Communications Commission) - Accreditation No. KR0013

RRA (Radio Research Agency) – Designation No. KR0013

3. GENERAL INFORMATION

3.1 Product Description

The Samsung Electronics Co Ltd, Model WCA731M (referred to as the EUT in this report) is a Wi-Fi/BT Transceiver. The product specification described herein was obtained from product data sheet or user's manual.

DEVICE TYPE	Wi-Fi/BT Transceiver	
Temperature Range	-20 °C ~ 50 °C	
OPERATING FREQUENCY	Bluetooth LE	2 402 MHz ~ 2 480 MHz
	Bluetooth	2 402 MHz ~ 2 480 MHz
	WLAN 2.4 GHz	2 412 MHz ~ 2 472 MHz (802.11b/g/n(HT20))
		2 422 MHz ~ 2 462 MHz (802.11n(HT40))
	5 150 MHz ~ 5 250 MHz Band	5 180 MHz ~ 5 240 MHz (802.11a/n(HT20)/ac(VHT20))
		5 190 MHz ~ 5 230 MHz (802.11n(HT40)/ac(VHT40))
		5 210 MHz (802.11ac(VHT80))
	5 250 MHz ~ 5 350 MHz Band	5 260 MHz ~ 5 320 MHz (802.11a/n(HT20)/ac(VHT20))
		5 270 MHz ~ 5 310 MHz (802.11n(HT40)/ac(VHT40))
		5 290 MHz (802.11ac(VHT80))
	5 470 MHz ~ 5 725 MHz Band	5 500 MHz ~ 5 700 MHz (802.11a/n(HT20)/ac(VHT20))
		5 510 MHz ~ 5 670 MHz (802.11n(HT40)/ac(VHT40))
		5 530 MHz (802.11ac(VHT80))
	5 725 MHz ~ 5 850 MHz Band	5 745 MHz ~ 5 825 MHz (802.11a/n(HT20)/ac(VHT20))
		5 755 MHz ~ 5 795 MHz (802.11n(HT40)/ac(VHT40))
		5 775 MHz (802.11ac(VHT80))
MODULATION TYPE	Bluetooth LE	GFSK for 1 Mbps / 2 Mbps
	Bluetooth	GFSK for 1Mbps, π/4-DQPSK for 2Mbps, 8-DPSK for 3Mbps
	WLAN 2.4 GHz	802.11b: DSSS Modulation(DBPSK/DQPSK/CCK)
		802.11g/n(HT20)/n(HT40): OFDM Modulation(BPSK/QPSK/16QAM/64QAM)
	WLAN 5 GHz	802.11a/n(HT20)/n(HT40)/ac(VHT80): OFDM Modulation(BPSK/QPSK/16QAM/64QAM)

RF OUTPUT POWER	Bluetooth LE	1 Mbps	11.06 dBm
		2 Mbps	11.07 dBm
	Bluetooth	1 Mbps	11.07 dBm
		2 Mbps	10.74 dBm
		3 Mbps	10.80 dBm
	WLAN 2.4 GHz	Antenna 0	18.09 dBm(802.11b)
			14.56 dBm(802.11g)
			14.34 dBm(802.11n_HT20)
			12.40 dBm(802.11n_HT40)
		Antenna 1	20.03 dBm(802.11b)
			14.26 dBm(802.11g)
			14.14 dBm(802.11n_HT20)
			12.20 dBm(802.11n_HT40)
		Multiple Antenna	17.42 dBm(802.11g) 17.25 dBm(802.11n_HT20) 15.31 dBm(802.11n_HT40)

RF OUTPUT POWER	5 150 MHz ~ 5 250 MHz Band	Antenna 0	15.50 dBm(802.11a) 13.81 dBm(802.11n_HT20) 13.85 dBm(802.11n_HT40) 13.95 dBm(802.11ac_VHT80)
		Antenna 1	12.85 dBm(802.11a) 12.91 dBm(802.11n_HT20) 12.24 dBm(802.11n_HT40) 11.15 dBm(802.11ac_VHT80)
		Multiple Antenna	17.38 dBm(802.11a) 16.18 dBm(802.11n_HT20) 16.04 dBm(802.11n_HT40) 15.78 dBm(802.11ac_VHT80)
	5 250 MHz ~ 5 350 MHz Band	Antenna 0	14.95 dBm(802.11a) 12.94 dBm(802.11n_HT20) 13.25 dBm(802.11n_HT40) 12.46 dBm(802.11ac_VHT80)
		Antenna 1	12.96 dBm(802.11a) 12.68 dBm(802.11n_HT20) 11.37 dBm(802.11n_HT40) 10.71 dBm(802.11ac_VHT80)
		Multiple Antenna	17.08 dBm(802.11a) 15.71 dBm(802.11n_HT20) 15.42 dBm(802.11n_HT40) 14.68 dBm(802.11ac_VHT80)

RF OUTPUT POWER	5 470 MHz ~ 5 725 MHz Band	Antenna 0	14.54 dBm(802.11a) 11.51 dBm(802.11n_HT20) 12.40 dBm(802.11n_HT40) 10.77 dBm(802.11ac_VHT80)
		Antenna 0_Straddle	12.82 dBm(802.11a) 12.95 dBm(802.11n_HT20) 11.61 dBm(802.11n_HT40) 11.90 dBm(802.11ac_VHT80)
		Antenna 1	12.72 dBm(802.11a) 10.85 dBm(802.11n_HT20) 11.73 dBm(802.11n_HT40) 8.73 dBm(802.11ac_VHT80)
		Antenna 1_Straddle	14.04 dBm(802.11a) 14.11 dBm(802.11n_HT20) 13.53 dBm(802.11n_HT40) 12.55 dBm(802.11ac_VHT80)
		Multiple Antenna	16.65 dBm(802.11a) 14.06 dBm(802.11n_HT20) 15.09 dBm(802.11n_HT40) 12.88 dBm(802.11ac_VHT80)
		Multiple Antenna _Straddle	16.48 dBm(802.11a) 16.58 dBm(802.11n_HT20) 15.69 dBm(802.11n_HT40) 15.25 dBm(802.11ac_VHT80)

RF OUTPUT POWER	5 725 MHz ~ 5 850 MHz Band	Antenna 0	13.89 dBm(802.11a) 13.84 dBm(802.11n_HT20) 12.19 dBm(802.11n_HT40) 11.41 dBm(802.11ac_VHT80)
		Antenna 0_Straddle	5.28 dBm(802.11a) 5.39 dBm(802.11n_HT20) -0.48 dBm(802.11n_HT40) -2.93 dBm(802.11ac_VHT80)
		Antenna 1	13.35 dBm(802.11a) 14.23 dBm(802.11n_HT20) 11.53 dBm(802.11n_HT40) 10.94 dBm(802.11ac_VHT80)
		Antenna 1_Straddle	5.61 dBm(802.11a) 6.29 dBm(802.11n_HT20) 1.25 dBm(802.11n_HT40) -1.99 dBm(802.11ac_VHT80)
		Multiple Antenna	16.75 dBm(802.11a) 16.87 dBm(802.11n_HT20) 14.76 dBm(802.11n_HT40) 14.19 dBm(802.11ac_VHT80)
		Multiple Antenna _Straddle	8.46 dBm(802.11a) 8.87 dBm(802.11n_HT20) 3.48 dBm(802.11n_HT40) 0.58 dBm(802.11ac_VHT80)

ANTENNA TYPE	Chip Antenna		
ANTENNA GAIN	Bluetooth LE	-4.00 dBi	
	Bluetooth	-4.00 dBi	
	WLAN 2.4 GHz	Antenna 0	-1.54 dBi
		Antenna 1	1.72 dBi
		Multiple Antenna	3.40 dBi
	5 150 MHz ~ 5 250 MHz Band	Antenna 0	-2.68 dBi
		Antenna 1	-0.90 dBi
		Multiple Antenna	1.31 dBi
	5 250 MHz ~ 5 350 MHz Band	Antenna 0	-2.54 dBi
		Antenna 1	-0.55 dBi
		Multiple Antenna	1.58 dBi
	5 470 MHz ~ 5 725 MHz Band	Antenna 0	-0.70 dBi
		Antenna 1	-0.29 dBi
		Multiple Antenna	2.52 dBi
	5 725 MHz ~ 5 850 MHz Band	Antenna 0	-1.26 dBi
		Antenna 1	-2.11 dBi
		Multiple Antenna	1.35 dBi
List of each Osc. or crystal Freq.(Freq. >= 1 MHz)	40 MHz		

3.2 Alternative type(s)/model(s); also covered by this test report.

- The following lists consist of the added model and their differences.

Model Name	Differences	Tested
WCA731M	Basic Model	<input checked="" type="checkbox"/>
WCA734M	The difference from the basic model is the removal of mic part.	<input checked="" type="checkbox"/>

Note: 1. Applicant consigns only basic model to test. Therefore this test report just guarantees the units, which have been tested.

2. The Applicant/manufacturer is responsible for the compliance of all variants.

4. EUT MODIFICATIONS

- None

5. SYSTEM TEST CONFIGURATION

5.1 Justification

This device was configured for testing in a typical way as a normal customer is supposed to be used. During the test, the following components were installed inside of the EUT.

DEVICE TYPE	MANUFACTURER	MODEL/PART NUMBER	FCC ID
Main Board	Samsung Electronics Co Ltd	WCA731M	N/A

5.2 Peripheral equipment

Defined as equipment needed for correct operation of the EUT, but not considered as tested:

Model	Manufacturer	Description	Connected to
WCA731M	Samsung Electronics Co Ltd	Wi-Fi/BT Transceiver (EUT)	
HP Probook	HP	Notebook PC	EUT
PPP009L-E	LIE-ON TECHNOLOGY (CHANGZHOU)CO.,LTD.	AC Adapter	

5.3 Mode of operation during the test

For the testing, software used to control the EUT for staying in continuous transmitting mode is programmed.

- Frequency / Channel Operations

		Channel	Frequency
802.11a 802.11n 802.11ac(20 MHz)	Band 1	36	5 180
		44	5 220
		48	5 240
	Band 2A	52	5 260
		60	5 300
		64	5 320
	Band 2C	100	5 500
		116	5 580
		140	5 700
	Straddle	144	5 720
	Band 3	149	5 745
		157	5 785
		165	5 825
802.11n 802.11ac(40 MHz)	Band 1	38	5 190
		46	5 230
	Band 2A	54	5 270
		62	5 310
	Band 2C	102	5 510
		110	5 550
		134	5 670
	Straddle	142	5 710
	Band 3	151	5 755
		5 795	5 795
802.11ac(80 MHz)	Band 1	42	5 210
	Band 2A	58	5 290
	Band 2C	106	5 530
	Straddle	138	5 690
	Band 3	155	5 775

UNII 1

Modulation	DATA RATE	OUTPUT POWER[dBm]	
		Antenna 0	Antenna 1
802.11 a (Middle Channel)	6 Mbps	15.50	12.85
	9 Mbps	15.41	12.65
	12 Mbps	15.29	12.53
	18 Mbps	15.20	12.47
	24 Mbps	14.17	11.61
	36 Mbps	14.08	11.55
	48 Mbps	13.11	10.56
	54 Mbps	12.23	9.52
HT 20 (Middle Channel)	6.5 Mbps	13.42	12.91
	13 Mbps	13.21	12.85
	19.5 Mbps	13.01	12.77
	26 Mbps	12.85	12.66
	39 Mbps	12.71	12.57
	52 Mbps	11.94	11.85
	58.5 Mbps	10.23	10.19
	65 Mbps	9.96	10.06
HT 40 (Low Channel)	13.5 Mbps	13.69	12.24
	27 Mbps	13.61	12.09
	40.5 Mbps	13.42	11.90
	54 Mbps	13.33	11.81
	81 Mbps	13.26	11.69
	108 Mbps	12.08	10.62
	121.5 Mbps	10.23	8.74
	135 Mbps	10.17	8.69

VHT80 (Middle Channel)	29.3 Mbps	13.95	11.15
	58.5 Mbps	13.83	10.98
	87.8 Mbps	13.51	10.87
	117 Mbps	13.40	10.73
	175.5 Mbps	13.29	10.61
	234 Mbps	12.36	9.53
	263.3 Mbps	12.27	9.44
	292.5 Mbps	10.65	7.62
	351 Mbps	10.52	7.53
	390 Mbps	10.47	7.46

- The worse case data rate for each modulation is determined 6 Mbps(Ant.0/Ant.1) for IEEE 802.11a, 6.5 Mbps(Ant.0/Ant.1) for HT20, 13.5 Mbps(Ant.0/Ant.1) for HT40, 29.3 Mbps(Ant.0/Ant.1) for VHT80.
- To get a maximum emission levels from the EUT, the EUT was moved throughout the XY, XZ, and YZ planes and the worst case is “XY” axis.

UNII 2A

Modulation	DATA RATE	OUTPUT POWER[dBm]	
		Antenna 0	Antenna 1
802.11 a (Middle Channel)	6 Mbps	14.50	11.75
	9 Mbps	14.32	11.63
	12 Mbps	14.10	11.45
	18 Mbps	14.03	11.31
	24 Mbps	13.15	10.45
	36 Mbps	13.08	10.40
	48 Mbps	12.31	9.75
	54 Mbps	11.45	8.85
HT 20 (Middle Channel)	6.5 Mbps	12.94	11.10
	13 Mbps	12.78	10.95
	19.5 Mbps	12.69	10.82
	26 Mbps	12.63	10.73
	39 Mbps	12.50	10.61
	52 Mbps	11.95	9.49
	58.5 Mbps	10.27	8.74
	65 Mbps	10.22	8.69
HT 40 (Low Channel)	13.5 Mbps	13.24	11.37
	27 Mbps	13.14	11.31
	40.5 Mbps	13.02	11.19
	54 Mbps	12.95	11.07
	81 Mbps	12.86	11.02
	108 Mbps	12.05	10.86
	121.5 Mbps	9.69	8.27
	135 Mbps	9.64	8.23

VHT80 (Middle Channel)	29.3 Mbps	12.46	10.71
	58.5 Mbps	12.37	10.62
	87.8 Mbps	12.26	10.56
	117 Mbps	12.12	10.47
	175.5 Mbps	12.05	10.39
	234 Mbps	11.11	9.57
	263.3 Mbps	11.04	9.46
	292.5 Mbps	9.17	7.62
	351 Mbps	9.06	7.55
	390 Mbps	8.98	7.49

- The worse case data rate for each modulation is determined 6 Mbps(Ant.0/Ant.1) for IEEE 802.11a, 6.5 Mbps(Ant.0/Ant.1) for HT20, 13.5 Mbps(Ant.0/Ant.1) for HT40, 29.3 Mbps(Ant.0/Ant.1) for VHT80.
- To get a maximum emission levels from the EUT, the EUT was moved throughout the XY, XZ, and YZ planes and the worst case is “XY” axis.

UNII 2C

Modulation	DATA RATE	OUTPUT POWER[dBm]	
		Antenna 0	Antenna 1
802.11 a (Middle Channel)	6 Mbps	13.41	12.62
	9 Mbps	13.15	12.47
	12 Mbps	13.01	12.32
	18 Mbps	12.95	12.25
	24 Mbps	12.01	11.37
	36 Mbps	11.92	11.29
	48 Mbps	11.07	10.54
	54 Mbps	10.25	9.73
HT 20 (Middle Channel)	6.5 Mbps	11.24	10.85
	13 Mbps	11.06	10.61
	19.5 Mbps	10.96	10.49
	26 Mbps	10.92	10.37
	39 Mbps	10.85	10.19
	52 Mbps	10.23	9.21
	58.5 Mbps	8.68	7.47
	65 Mbps	8.60	7.42
HT 40 (Low Channel)	13.5 Mbps	12.09	10.54
	27 Mbps	11.94	10.42
	40.5 Mbps	11.82	10.30
	54 Mbps	11.77	10.23
	81 Mbps	11.65	10.18
	108 Mbps	10.85	9.32
	121.5 Mbps	9.68	8.56
	135 Mbps	9.31	8.42

VHT80 (Middle Channel)	29.3 Mbps	10.77	8.73
	58.5 Mbps	10.69	8.62
	87.8 Mbps	10.62	8.51
	117 Mbps	10.53	8.44
	175.5 Mbps	10.46	8.36
	234 Mbps	9.67	7.51
	263.3 Mbps	9.59	7.43
	292.5 Mbps	8.02	5.94
	351 Mbps	7.92	5.82
	390 Mbps	7.84	5.76

- The worse case data rate for each modulation is determined 6 Mbps(Ant.0/Ant.1) for IEEE 802.11a, 6.5 Mbps(Ant.0/Ant.1) for HT20, 13.5 Mbps(Ant.0/Ant.1) for HT40, 29.3 Mbps(Ant.0/Ant.1) for VHT80.
- To get a maximum emission levels from the EUT, the EUT was moved throughout the XY, XZ, and YZ planes and the worst case is “XY” axis.

UNII 3

Modulation	DATA RATE	OUTPUT POWER[dBm]	
		Antenna 0	Antenna 1
802.11 a (Middle Channel)	6 Mbps	14.10	13.35
	9 Mbps	14.91	12.95
	12 Mbps	13.85	12.84
	18 Mbps	13.25	12.50
	24 Mbps	12.38	11.68
	36 Mbps	12.27	11.60
	48 Mbps	11.45	10.94
	54 Mbps	10.63	10.25
HT 20 (Middle Channel)	6.5 Mbps	13.07	14.12
	13 Mbps	12.94	13.82
	19.5 Mbps	12.86	13.76
	26 Mbps	12.82	13.59
	39 Mbps	12.78	13.37
	52 Mbps	12.11	12.53
	58.5 Mbps	10.25	10.82
	65 Mbps	10.18	10.76
HT 40 (Low Channel)	13.5 Mbps	11.95	11.53
	27 Mbps	11.84	11.37
	40.5 Mbps	11.72	11.12
	54 Mbps	11.65	11.05
	81 Mbps	11.57	10.88
	108 Mbps	10.71	10.03
	121.5 Mbps	8.89	8.22
	135 Mbps	8.83	8.15

VHT80 (Middle Channel)	29.3 Mbps	11.41	10.94
	58.5 Mbps	11.29	10.81
	87.8 Mbps	11.14	10.65
	117 Mbps	11.05	10.53
	175.5 Mbps	10.93	10.45
	234 Mbps	10.04	9.56
	263.3 Mbps	9.94	9.43
	292.5 Mbps	8.16	7.63
	351 Mbps	8.02	7.57
	390 Mbps	7.97	7.48

- The worse case data rate for each modulation is determined 6 Mbps(Ant.0/Ant.1) for IEEE 802.11a, 6.5 Mbps(Ant.0/Ant.1) for HT20, 13.5 Mbps(Ant.0/Ant.1) for HT40, 29.3 Mbps(Ant.0/Ant.1) for VHT80.
- To get a maximum emission levels from the EUT, the EUT was moved throughout the XY, XZ, and YZ planes and the worst case is “XY” axis.

- Duty Cycle


	Band	Mode	Tx On Time [ms]	Tx Off Time [ms]	Duty Cycle [%]	Correction Factor [dB]
Antenna 0	UNII 1	802.11 a	-	-	100.00	-
		802.11 HT 20	-	-	100.00	-
		802.11 HT 40	-	-	100.00	-
		802.11 VHT 80	-	-	100.00	-
	UNII 2A	802.11 a	-	-	100.00	-
		802.11 HT 20	-	-	100.00	-
		802.11 HT 40	-	-	100.00	-
		802.11 VHT 80	-	-	100.00	-
	UNII 2C	802.11 a	-	-	100.00	-
		802.11 HT 20	-	-	100.00	-
		802.11 HT 40	-	-	100.00	-
		802.11 VHT 80	-	-	100.00	-
	UNII 3	802.11 a	-	-	100.00	-
		802.11 HT 20	-	-	100.00	-
		802.11 HT 40	-	-	100.00	-
		802.11 VHT 80	-	-	100.00	-
Antenna 1	UNII 1	802.11 a	-	-	100.00	-
		802.11 HT 20	-	-	100.00	-
		802.11 HT 40	-	-	100.00	-
		802.11 VHT 80	-	-	100.00	-
	UNII 2A	802.11 a	-	-	100.00	-
		802.11 HT 20	-	-	100.00	-
		802.11 HT 40	-	-	100.00	-
		802.11 VHT 80	-	-	100.00	-
	UNII 2C	802.11 a	-	-	100.00	-
		802.11 HT 20	-	-	100.00	-
		802.11 HT 40	-	-	100.00	-
		802.11 VHT 80	-	-	100.00	-
	UNII 3	802.11 a	-	-	100.00	-
		802.11 HT 20	-	-	100.00	-
		802.11 HT 40	-	-	100.00	-
		802.11 VHT 80	-	-	100.00	-

	Mode	Tx On Time [ms]	Tx Off Time [ms]	Duty Cycle [%]	Correction Factor [dB]
Staddle	802.11 a	-	-	100.00	-
	802.11 HT 20	-	-	100.00	-
	802.11 HT 40	-	-	100.00	-
	802.11 VHT 80	-	-	100.00	-


Note – Duty Cycle : (Tx On Time / (Tx On Time + Tx Off Time)) * 100

Correction Factor : $10 * \log(1 / (\text{Duty Cycle} / 100))$


- Test Plot

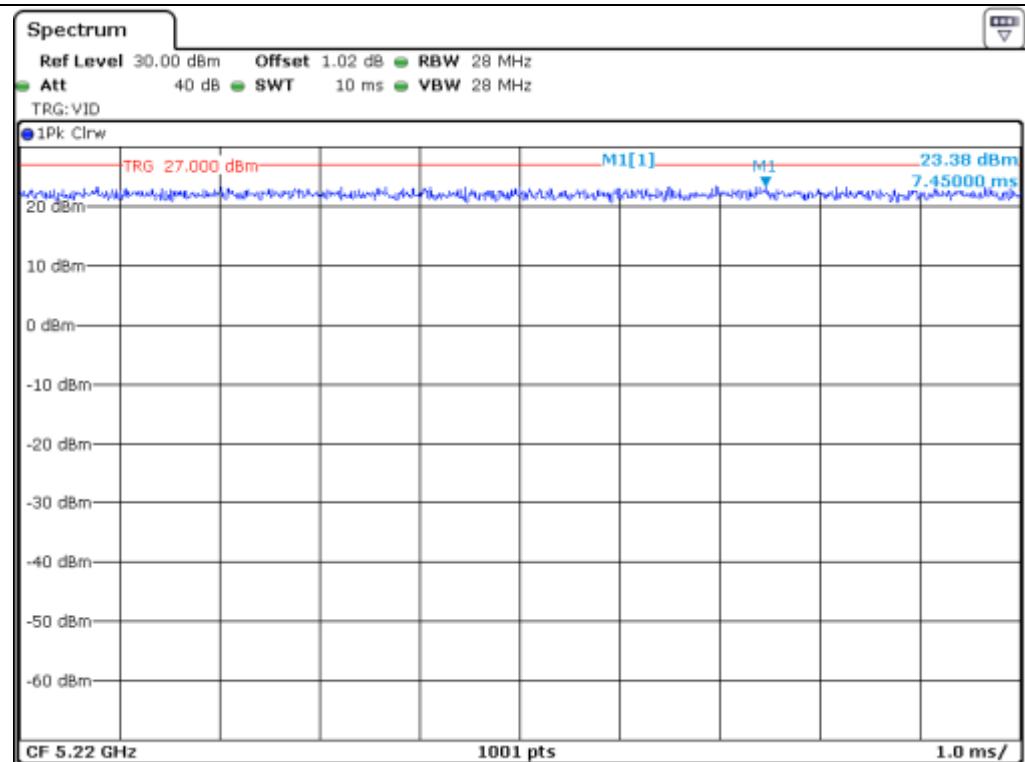


UNII 1_802.11 a_Antenna 0

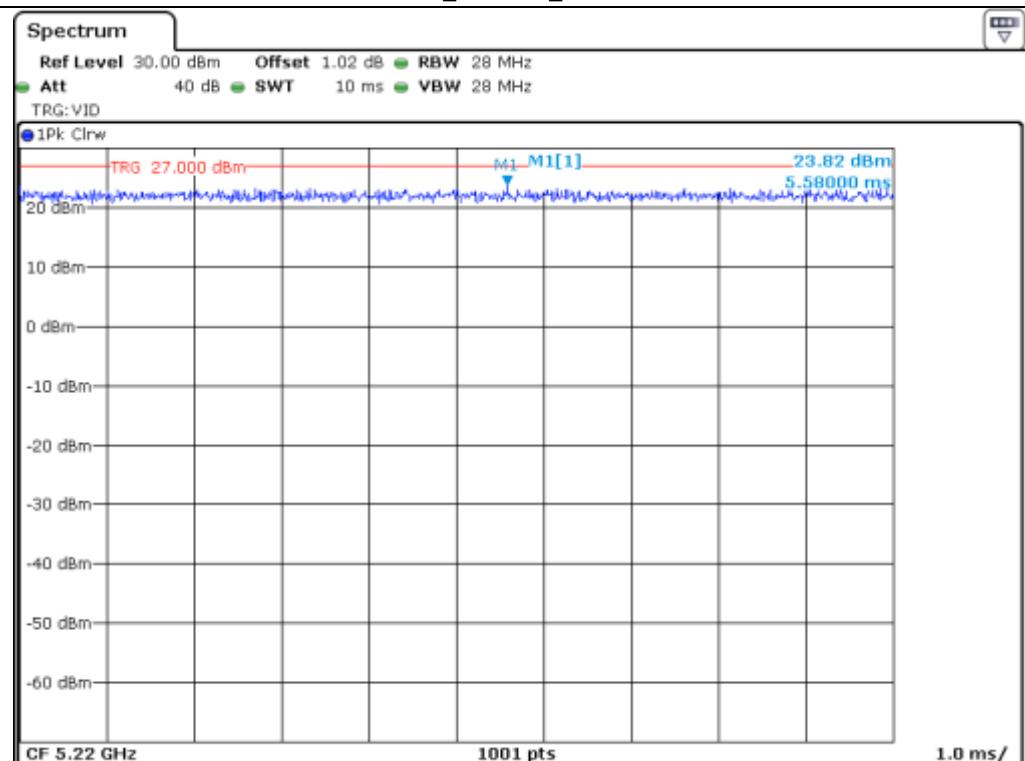


UNII 1_802.11 HT 20_Antenna 0

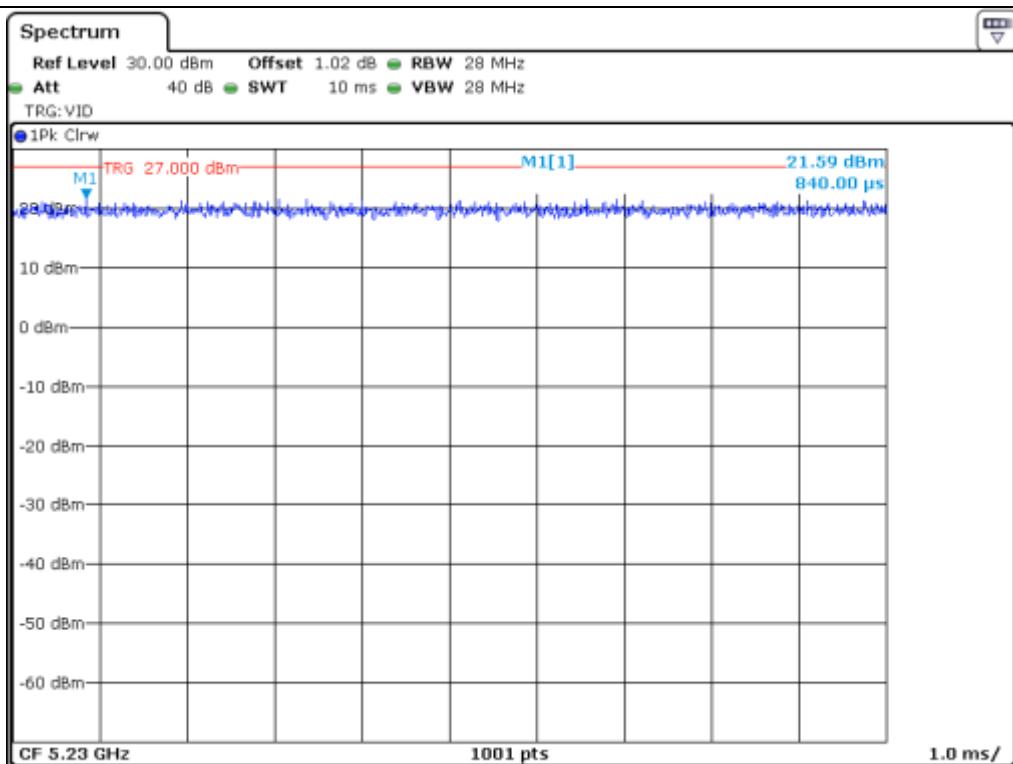


UNII 1_802.11 HT40_Antenna 0

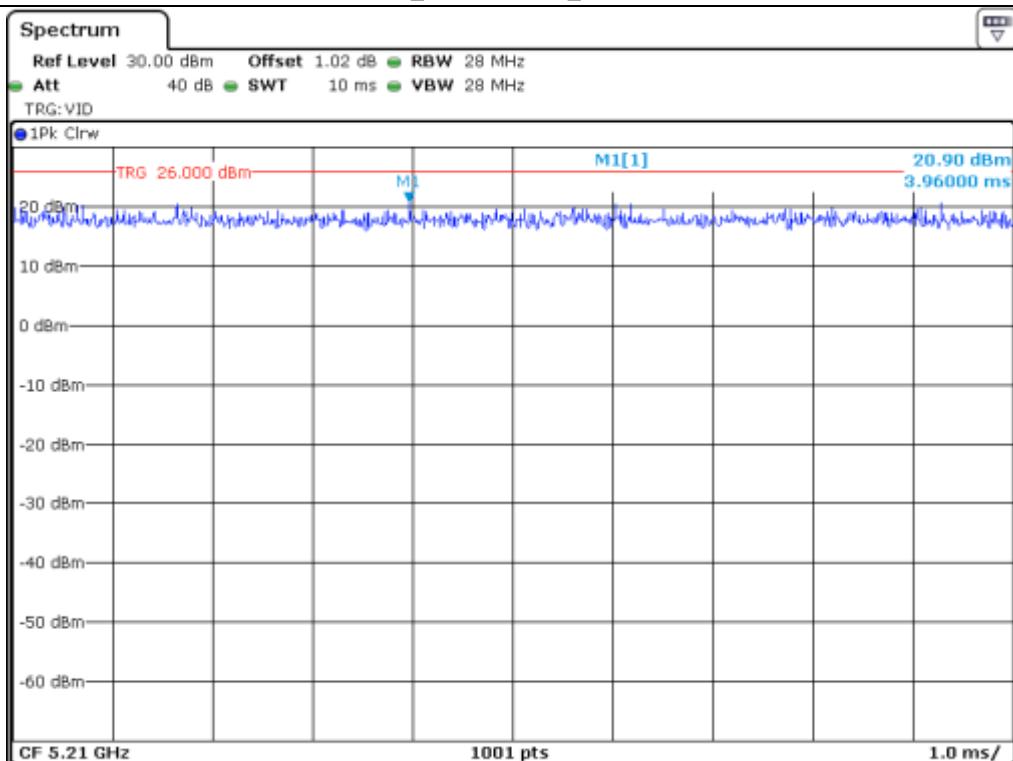


UNII 1_802.11 VHT 80_Antenna 0

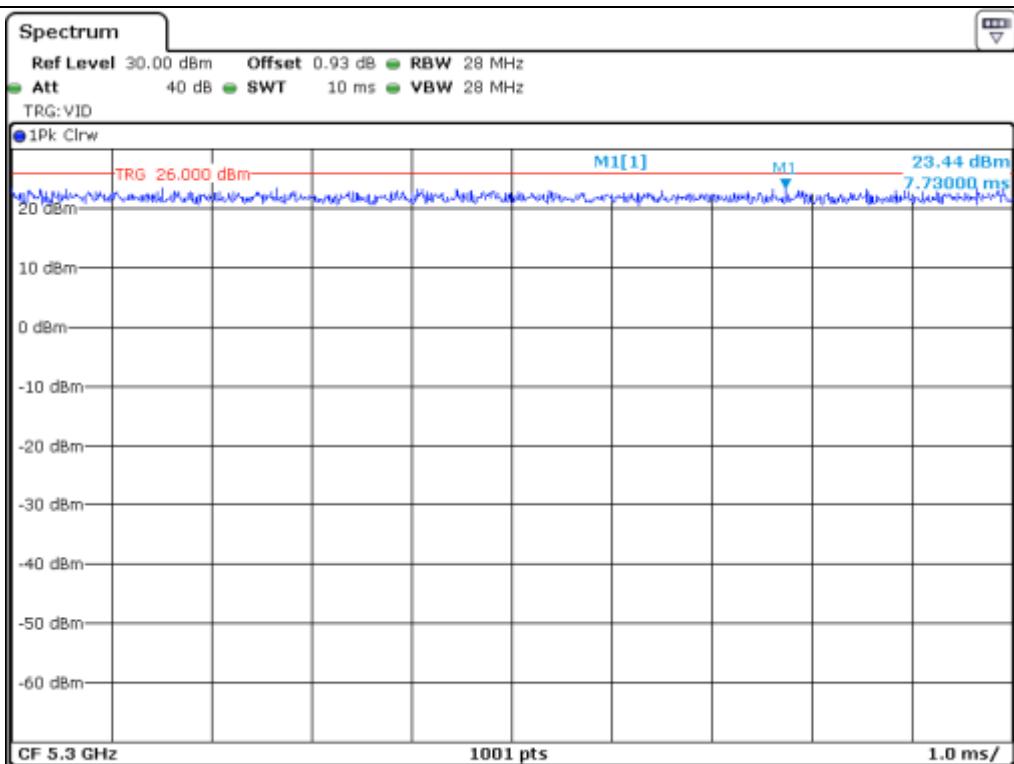


UNII 2A_802.11 a_Antenna 0

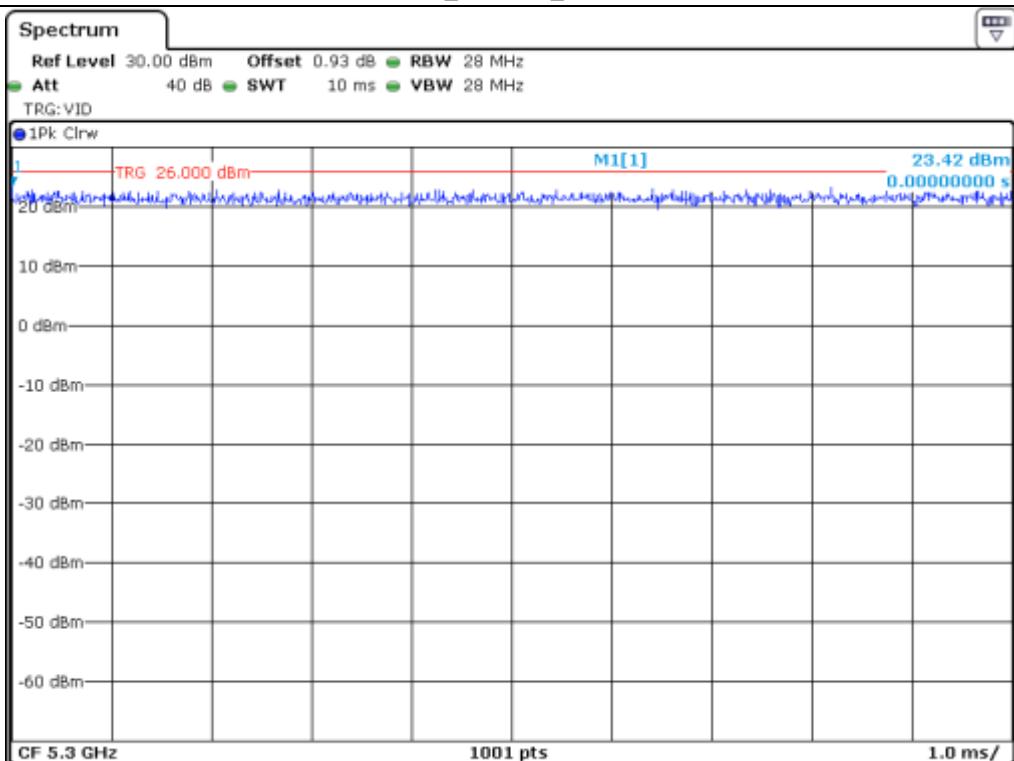


UNII 2A_802.11 HT 20_Antenna 0

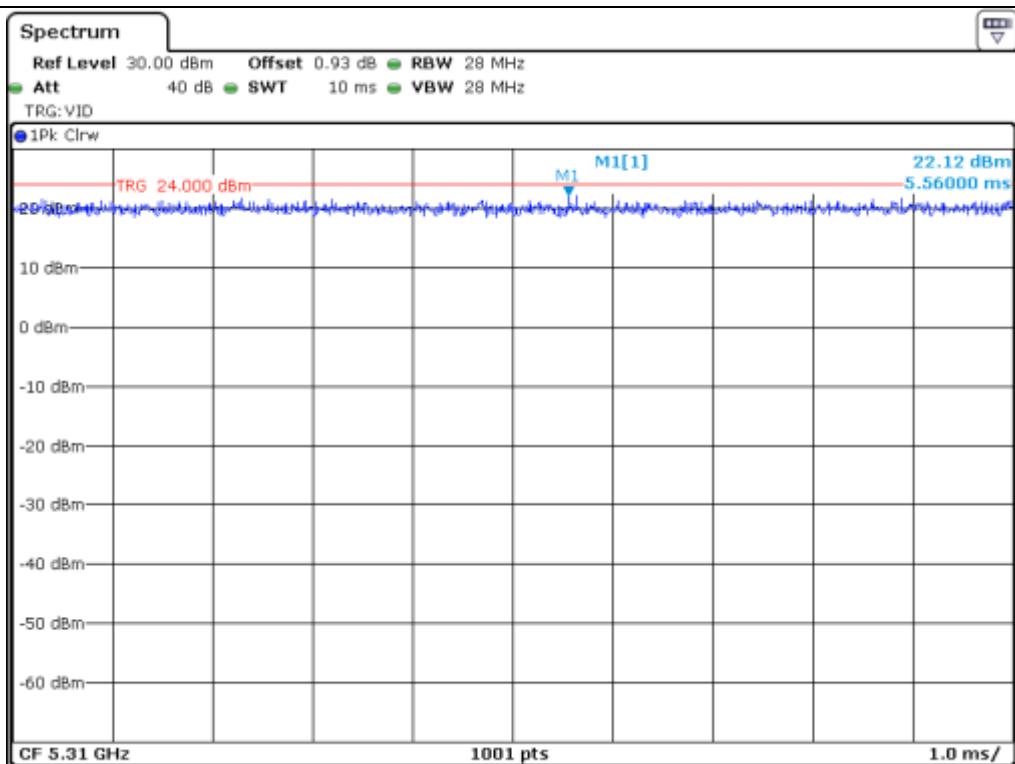


UNII 2A_802.11 HT40_Antenna 0

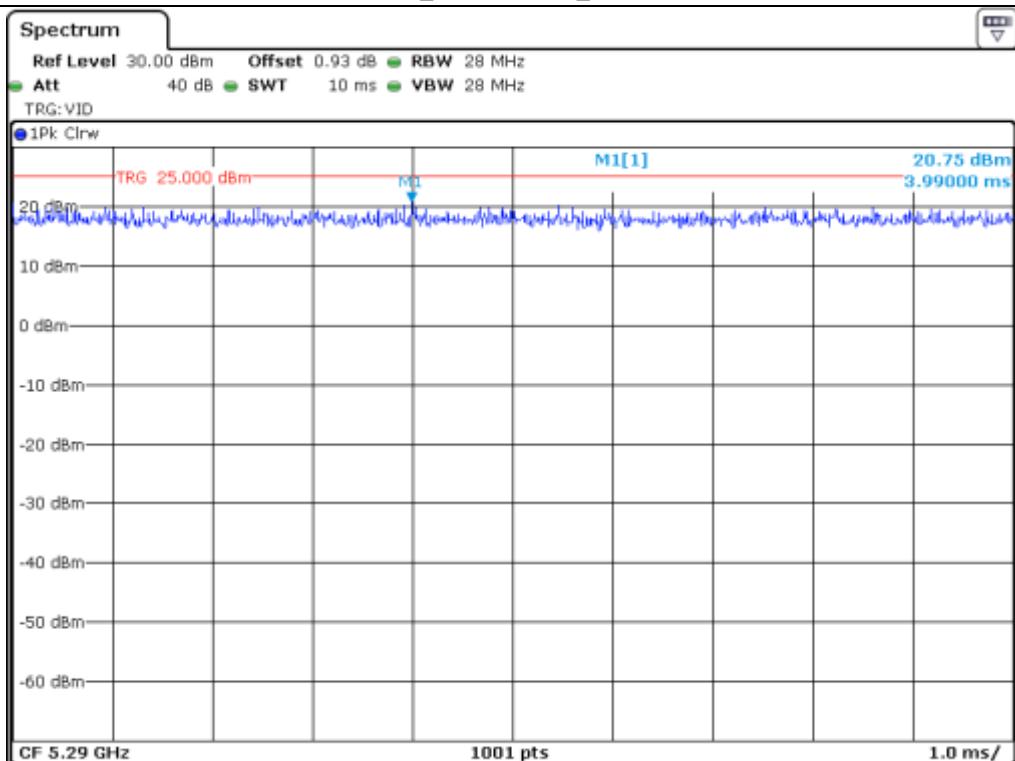


UNII 2A_802.11 VHT 80_Antenna 0

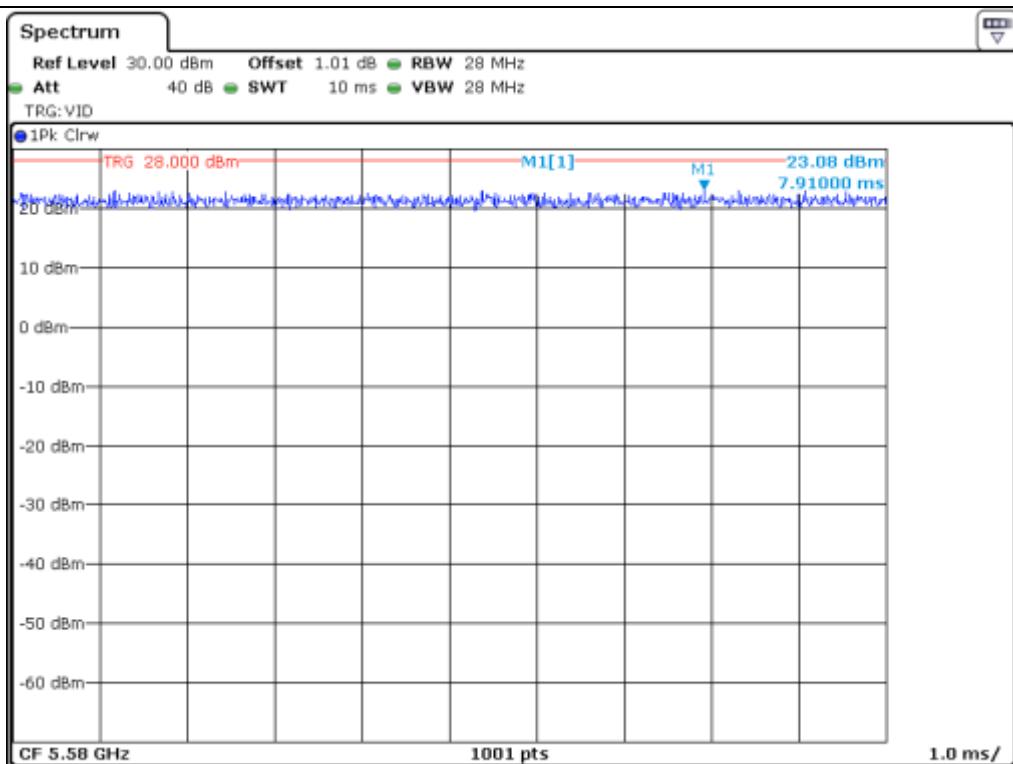


UNII 2C_802.11 a_Antenna 0

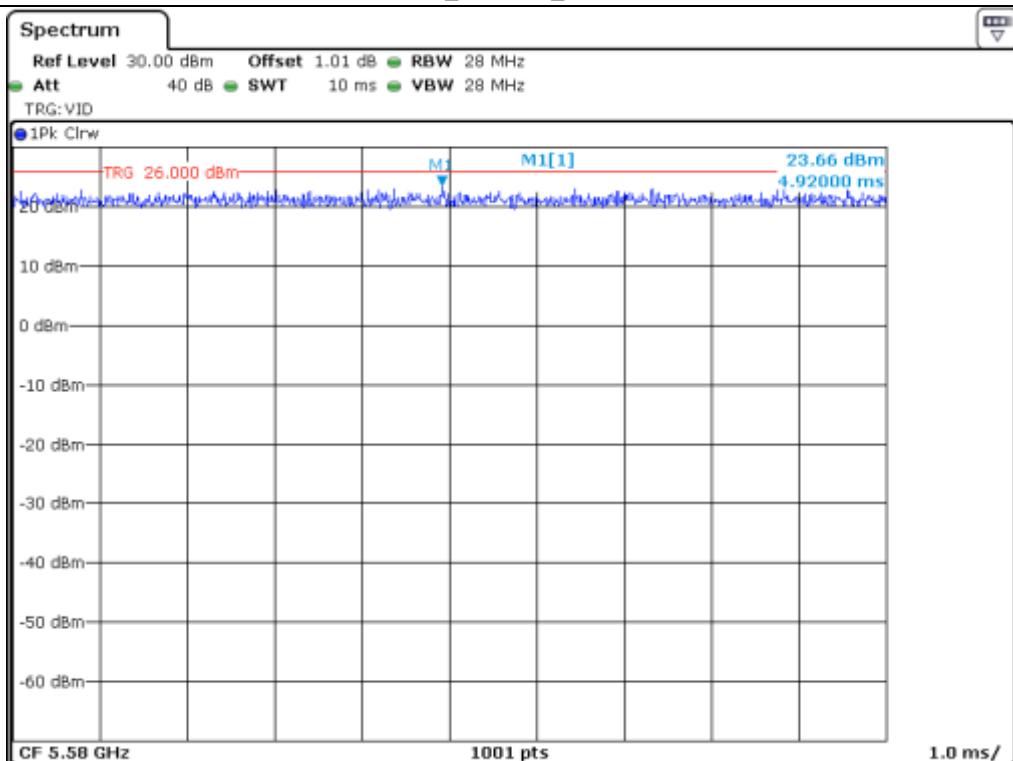


UNII 2C_802.11 HT 20_Antenna 0

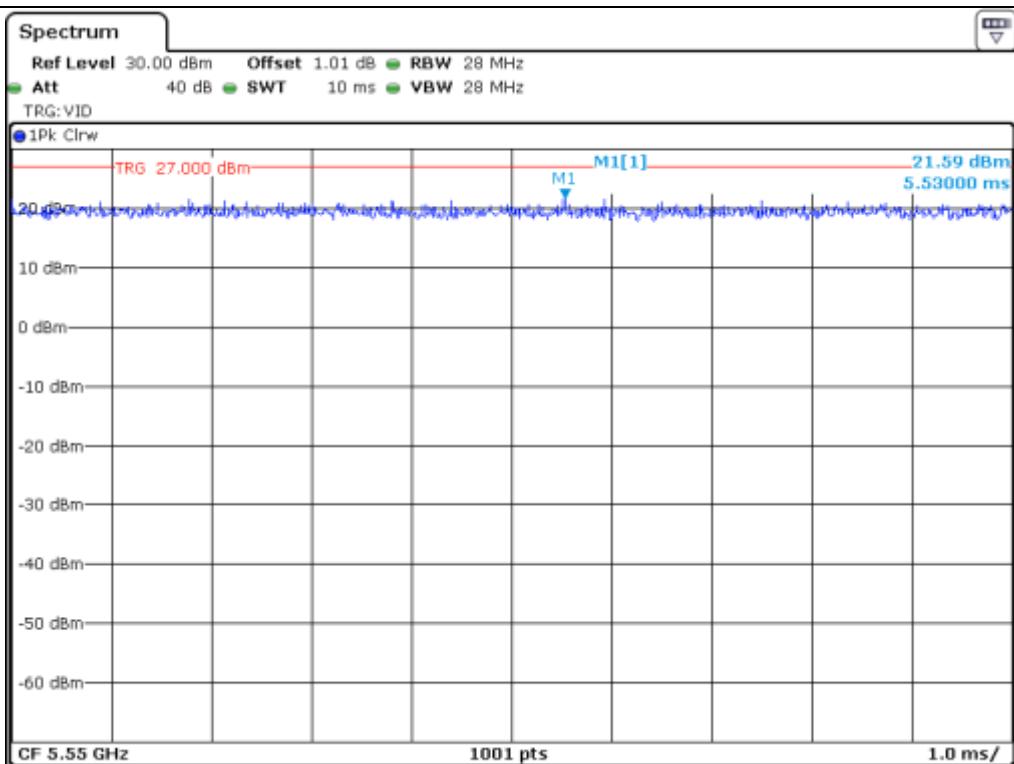


UNII 2C_802.11 HT40_Antenna 0

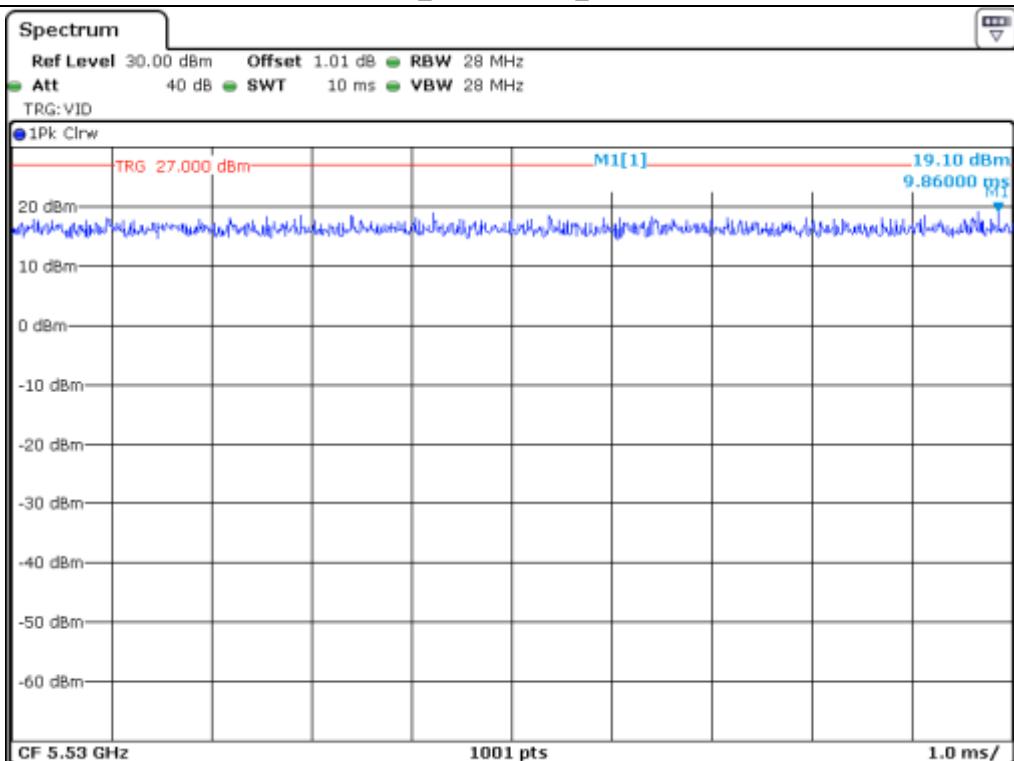


UNII 2C_802.11 VHT 80_Antenna 0

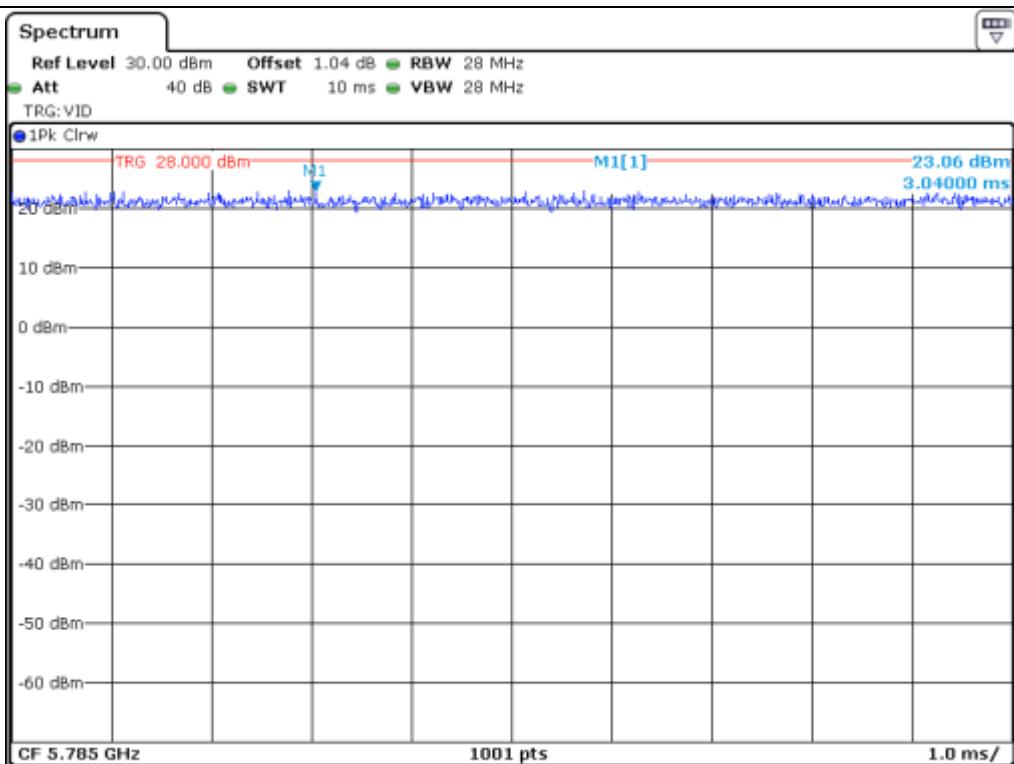


UNII 3_802.11 a_Antenna 0

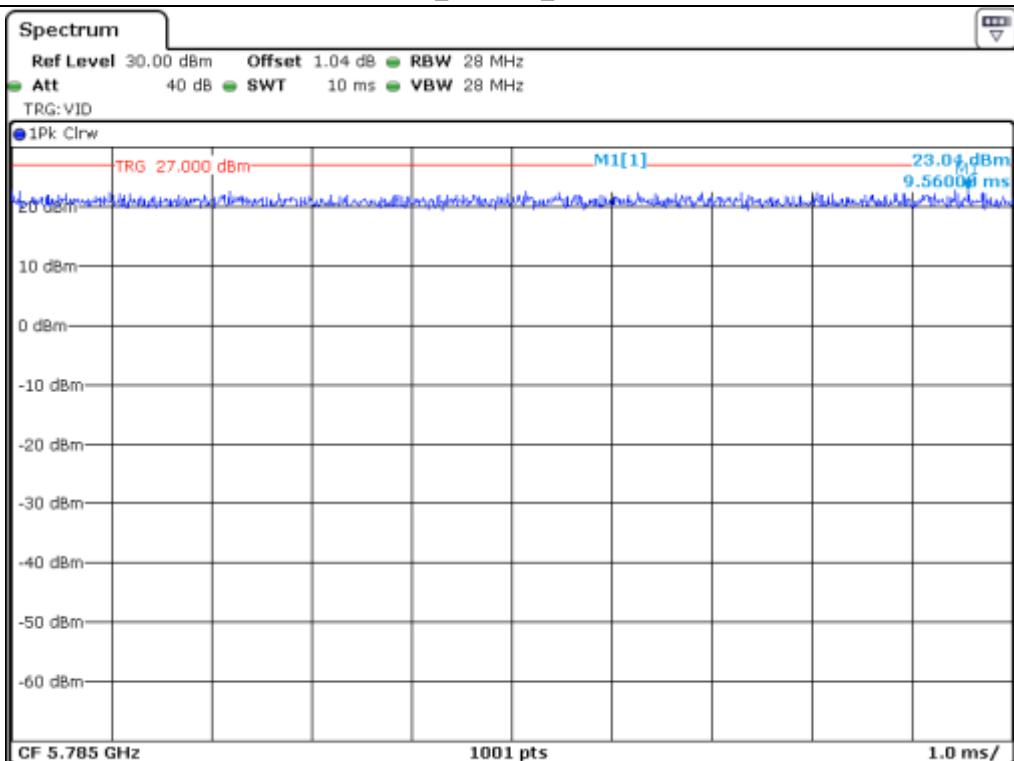


UNII 3_802.11 HT 20_Antenna 0

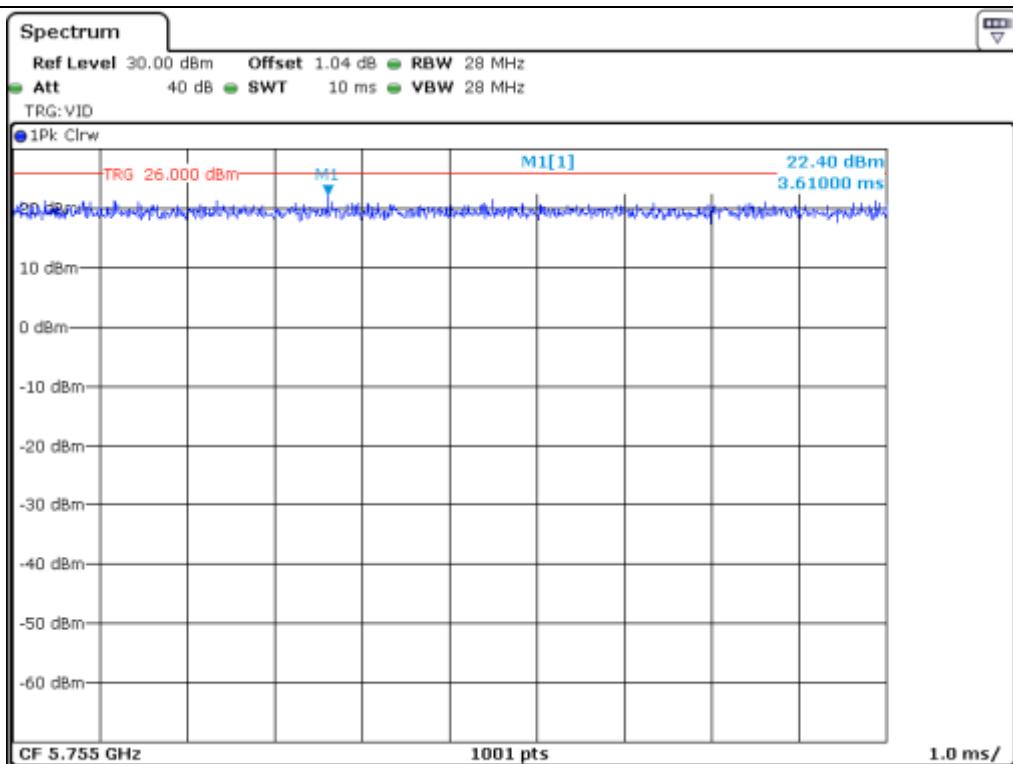


UNII 3_802.11 HT40_Antenna 0

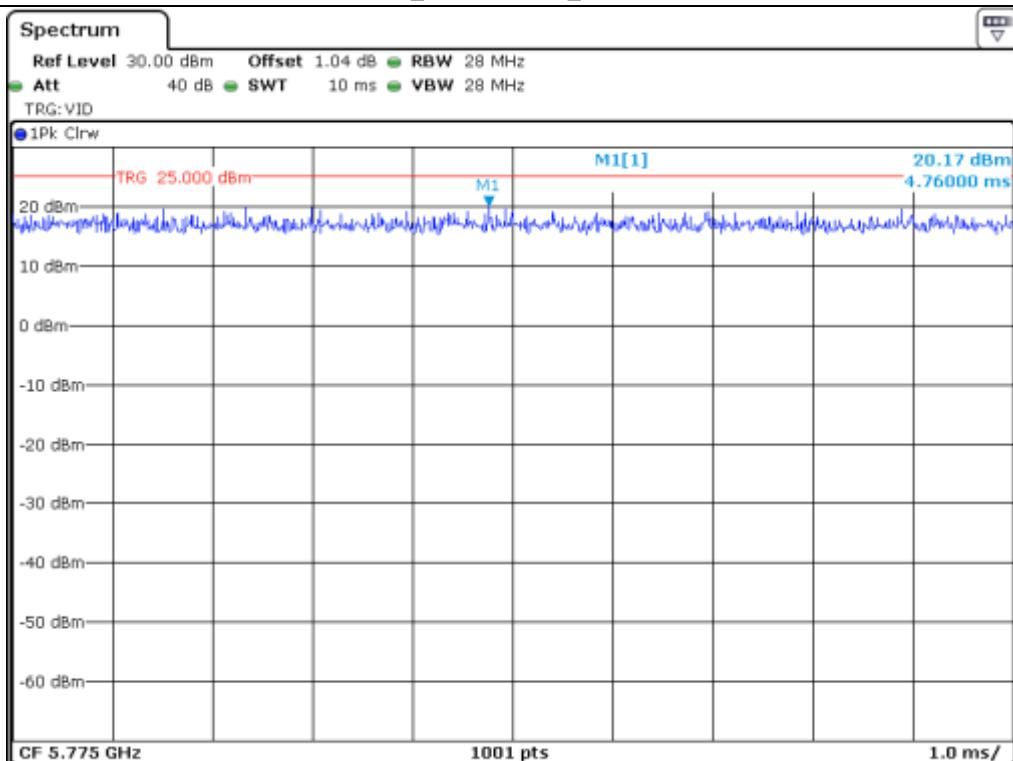


UNII 3_802.11 VHT 80_Antenna 0

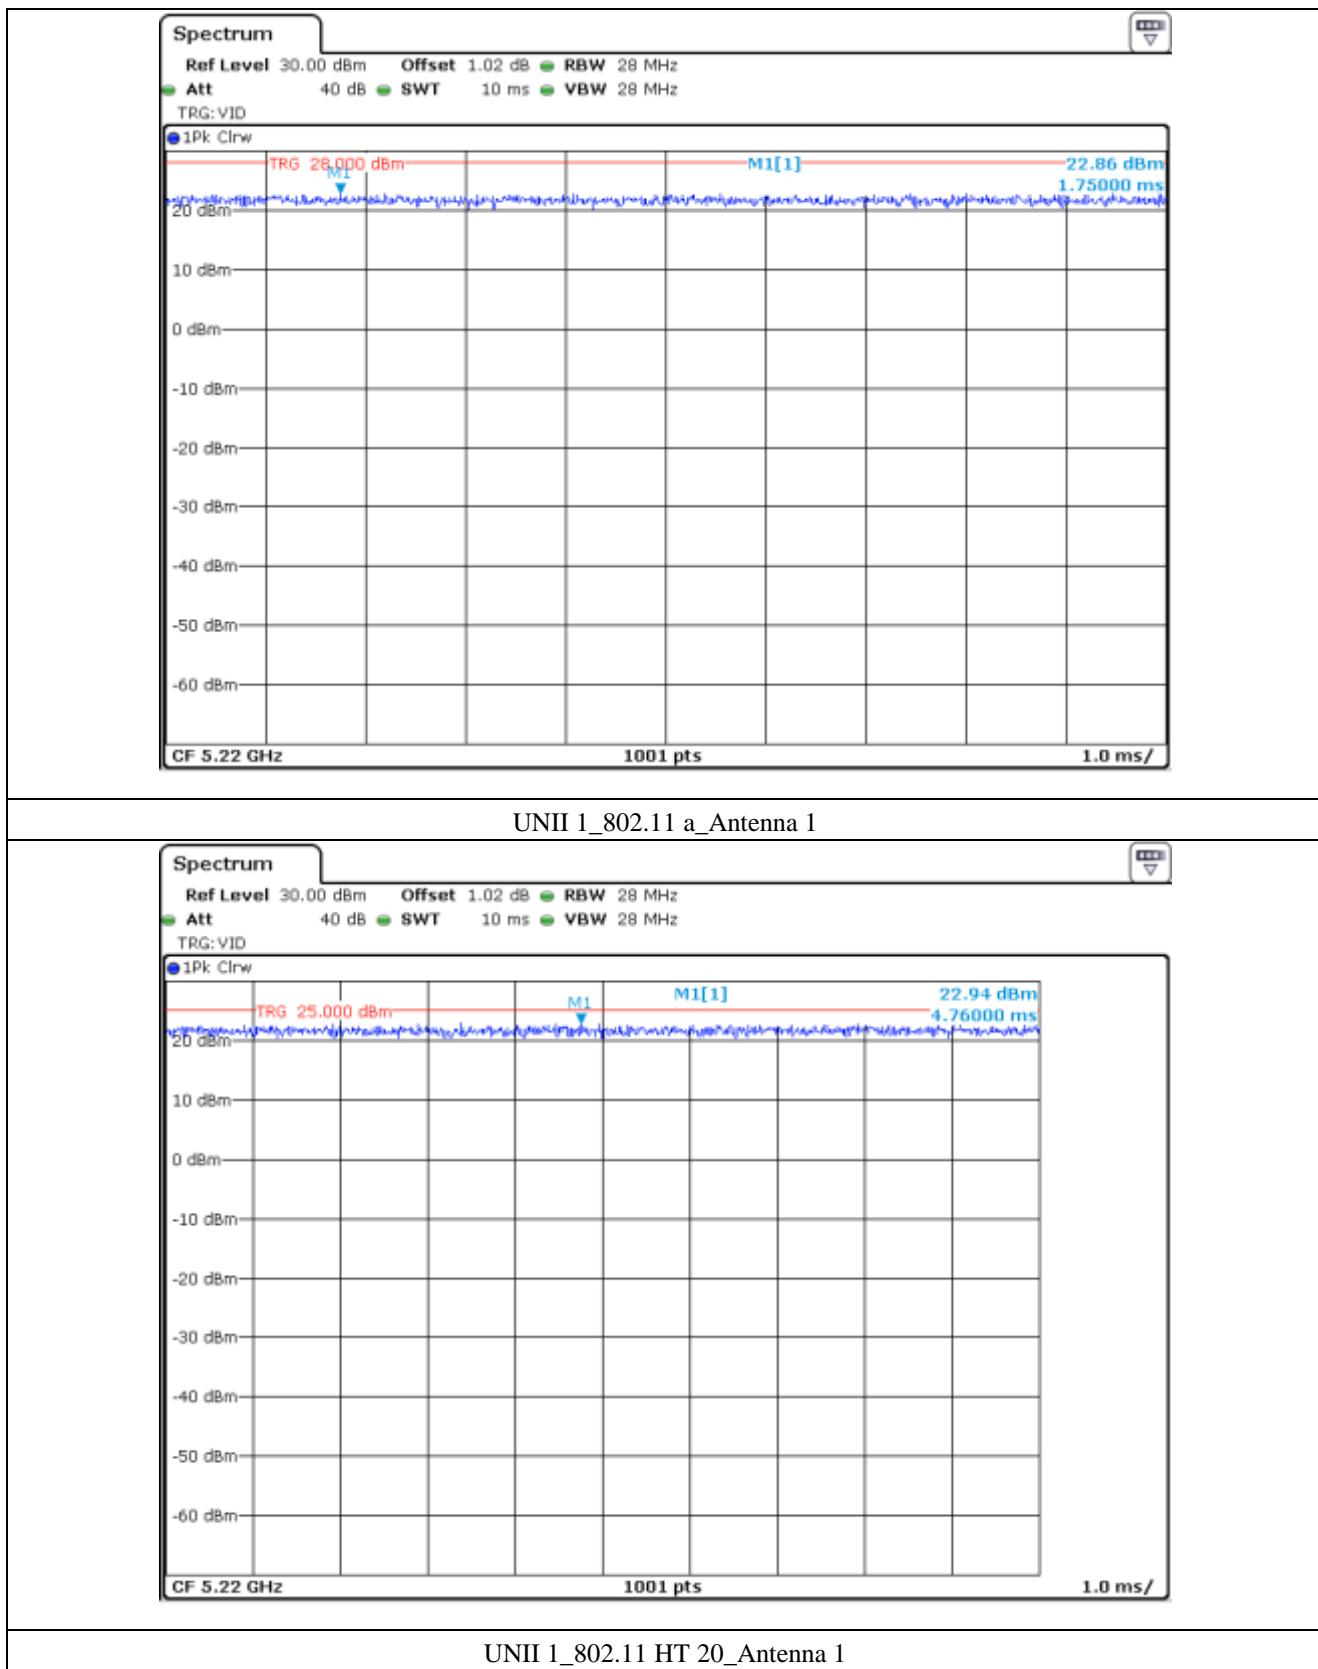


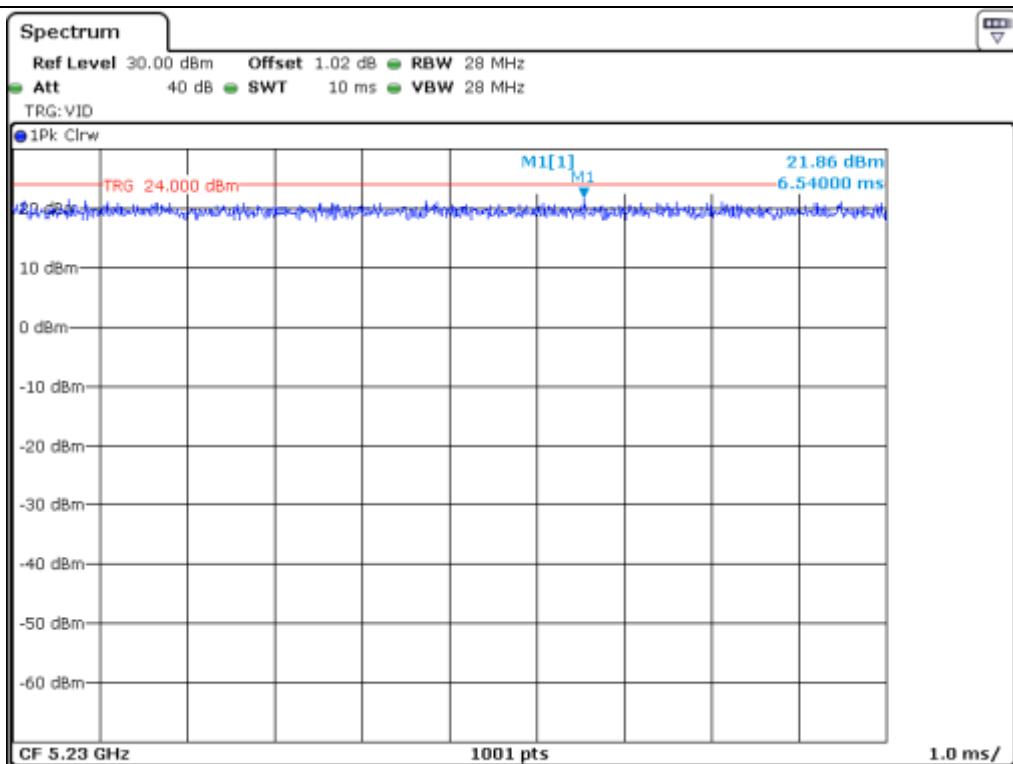


UNII 1_802.11 HT40_Antenna 1

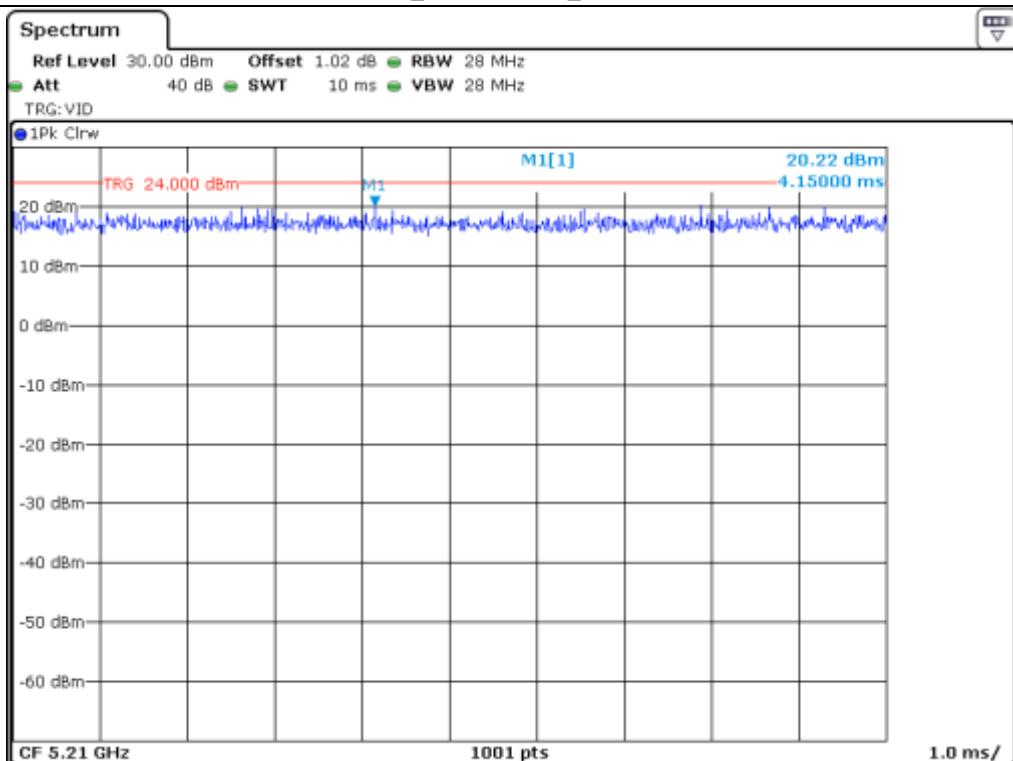


UNII 1_802.11 VHT 80_Antenna 1

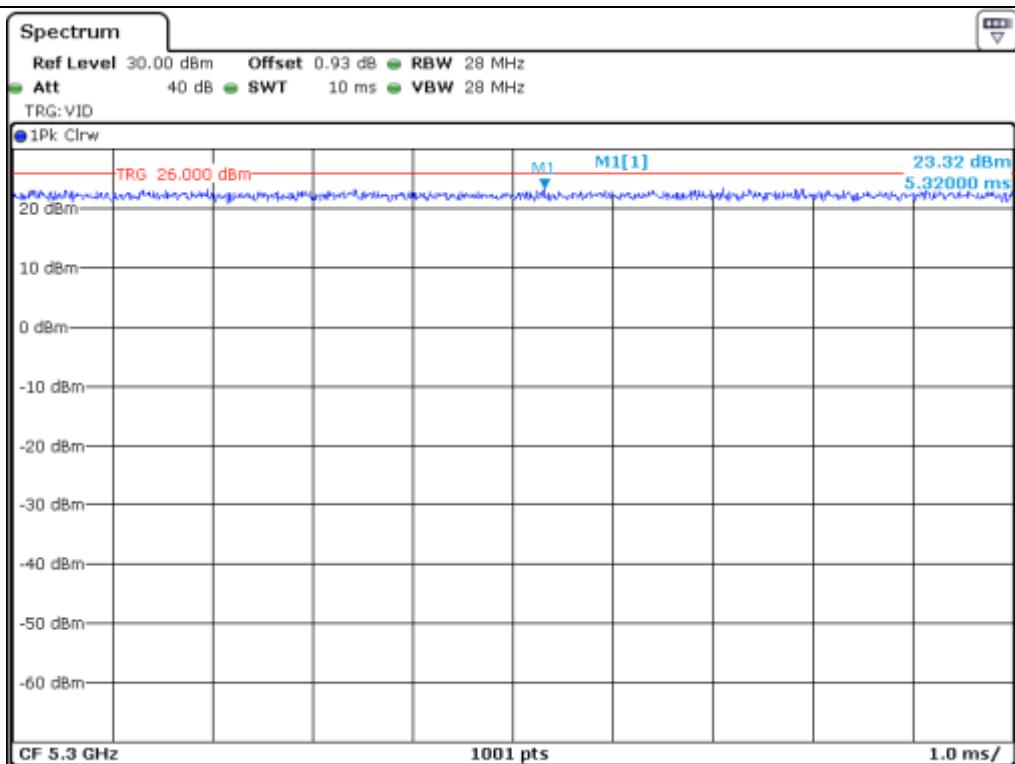


UNII 2A_802.11 a_Antenna 1

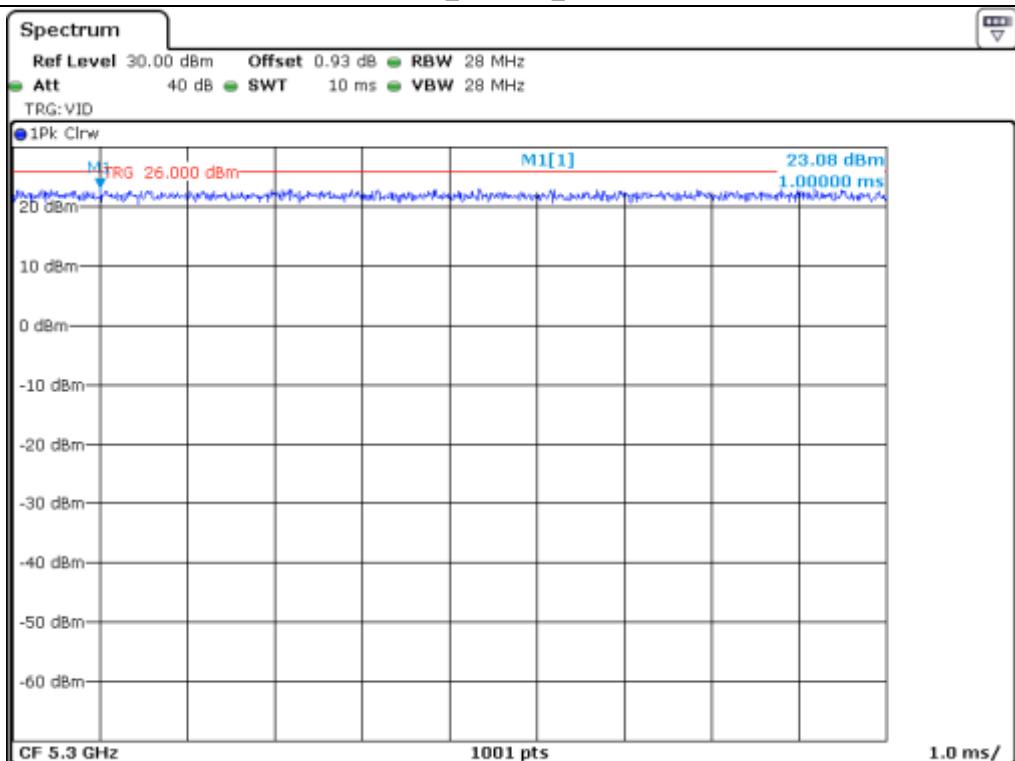


UNII 2A_802.11 HT 20_Antenna 1

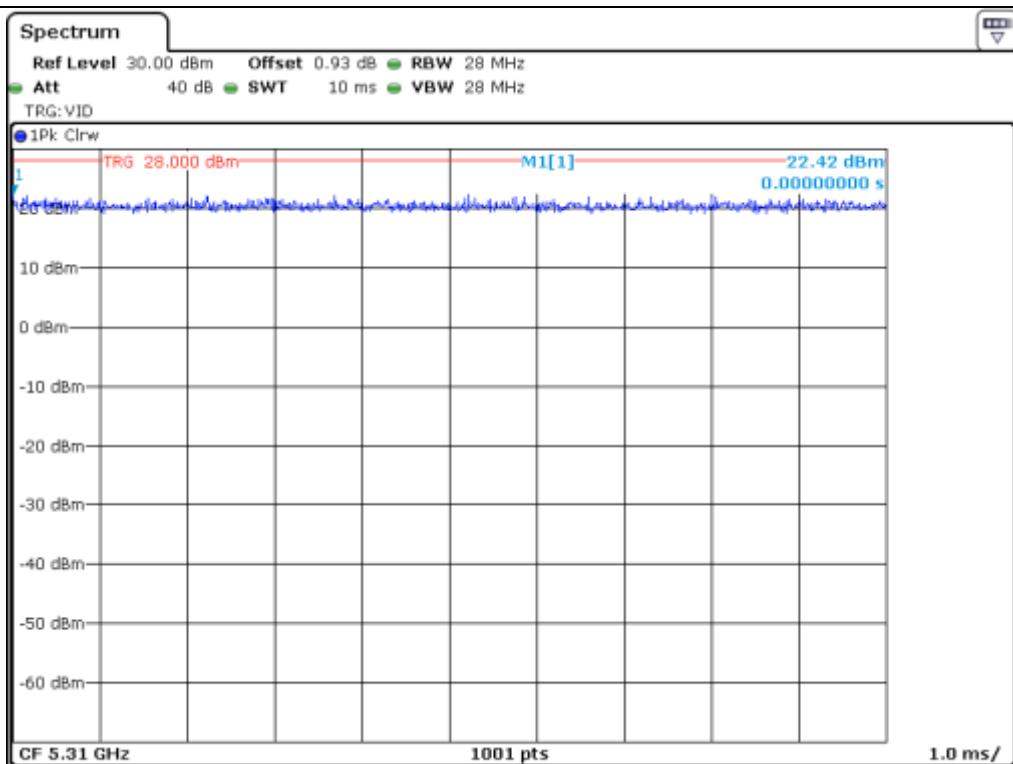


UNII 2A_802.11 HT40_Antenna 1

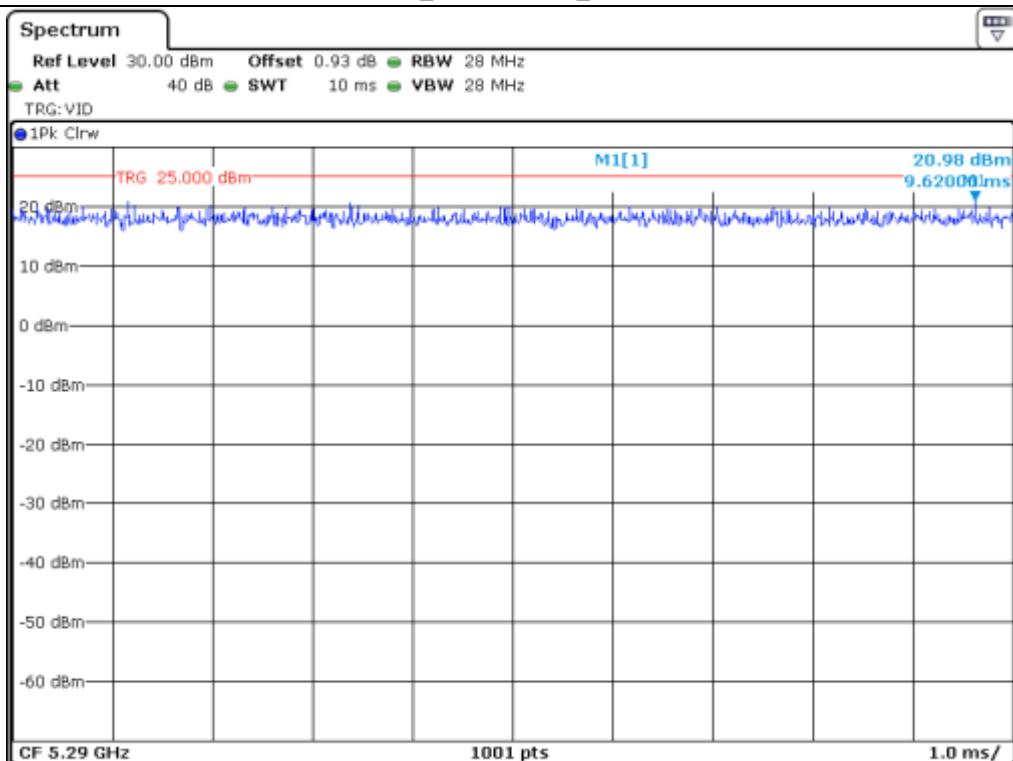


UNII 2A_802.11 VHT 80_Antenna 1

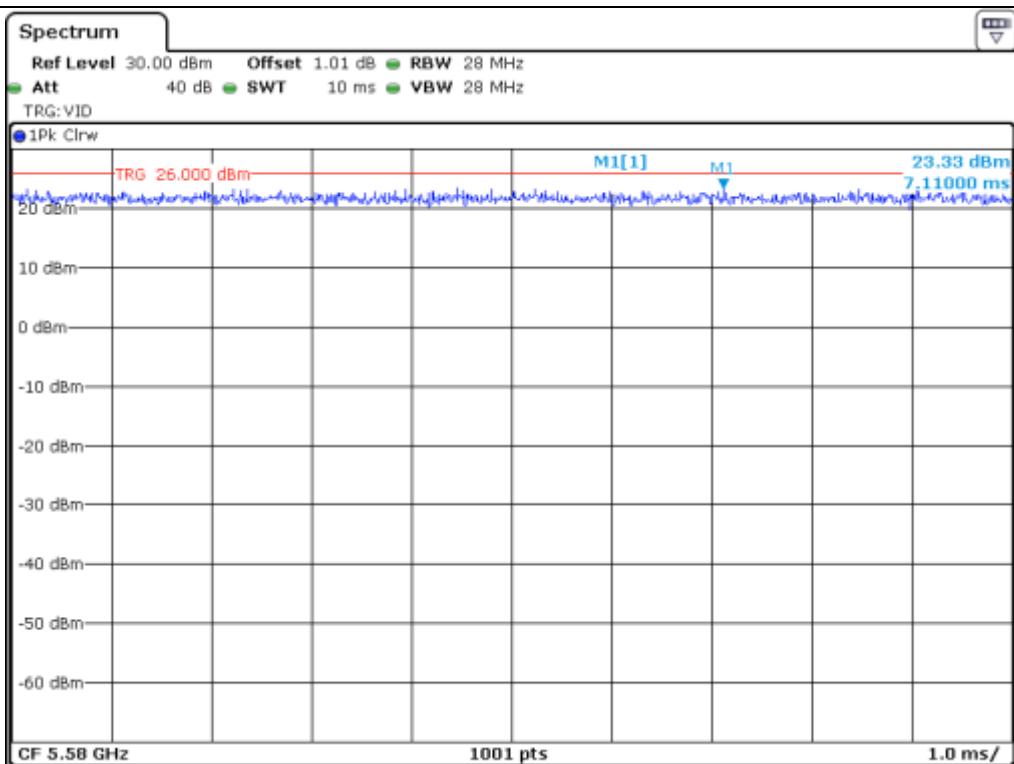


UNII 2C_802.11 a_Antenna 1

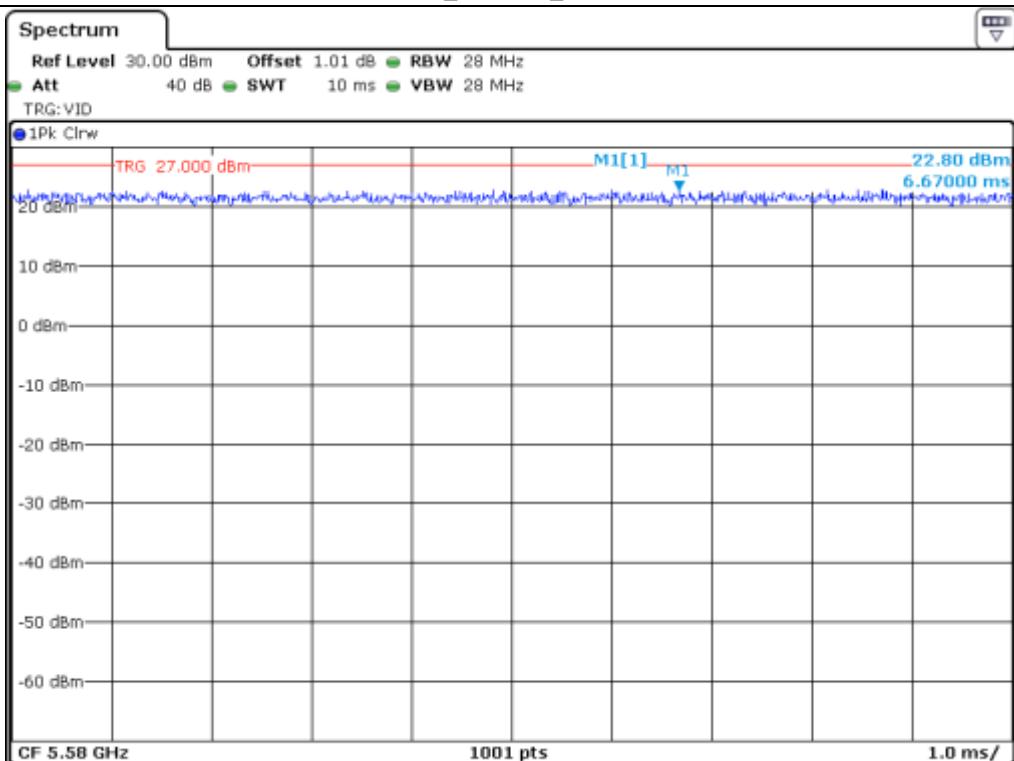


UNII 2C_802.11 HT 20_Antenna 1

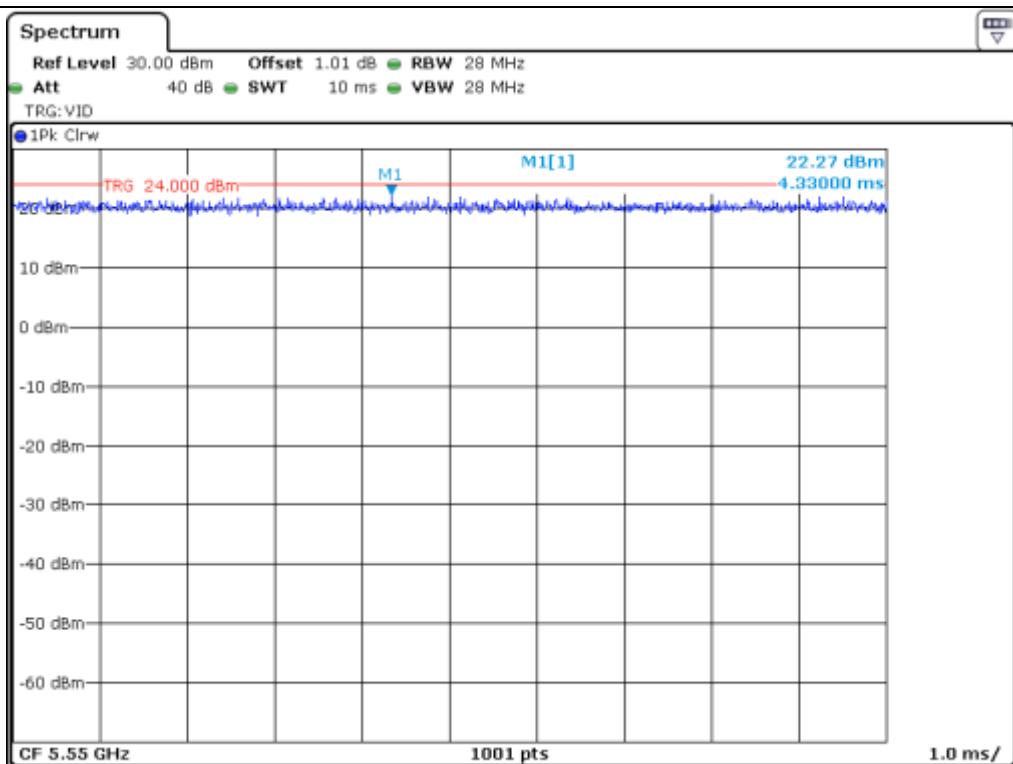


UNII 2C_802.11 HT40_Antenna 1

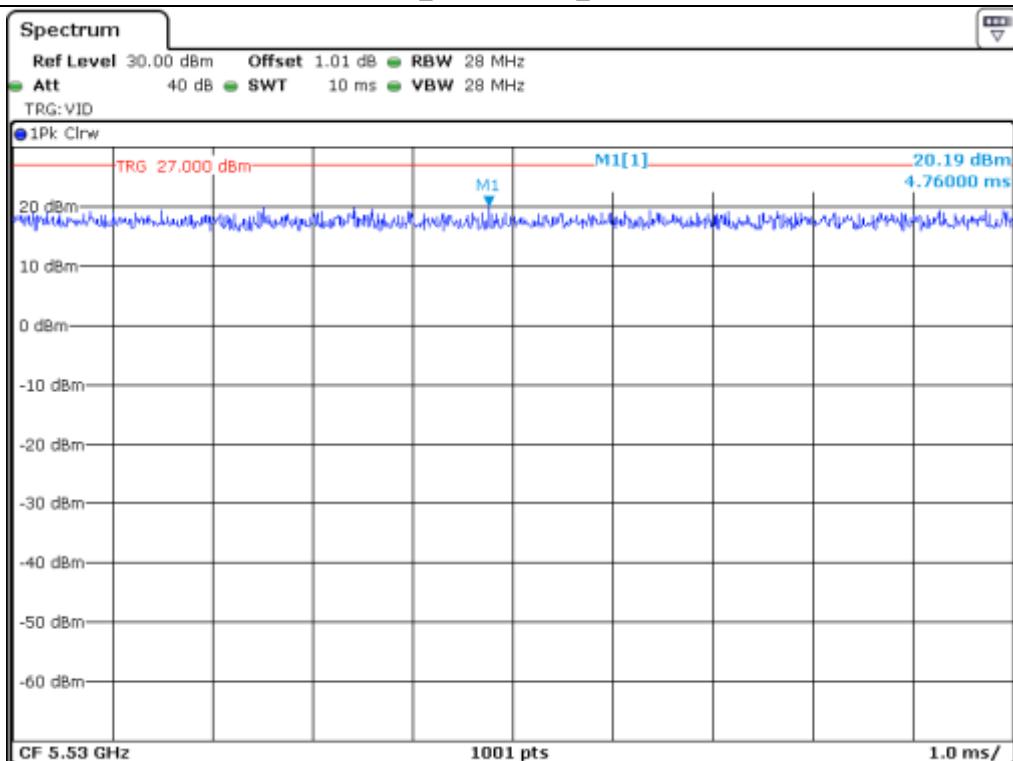


UNII 2C_802.11 VHT 80_Antenna 1

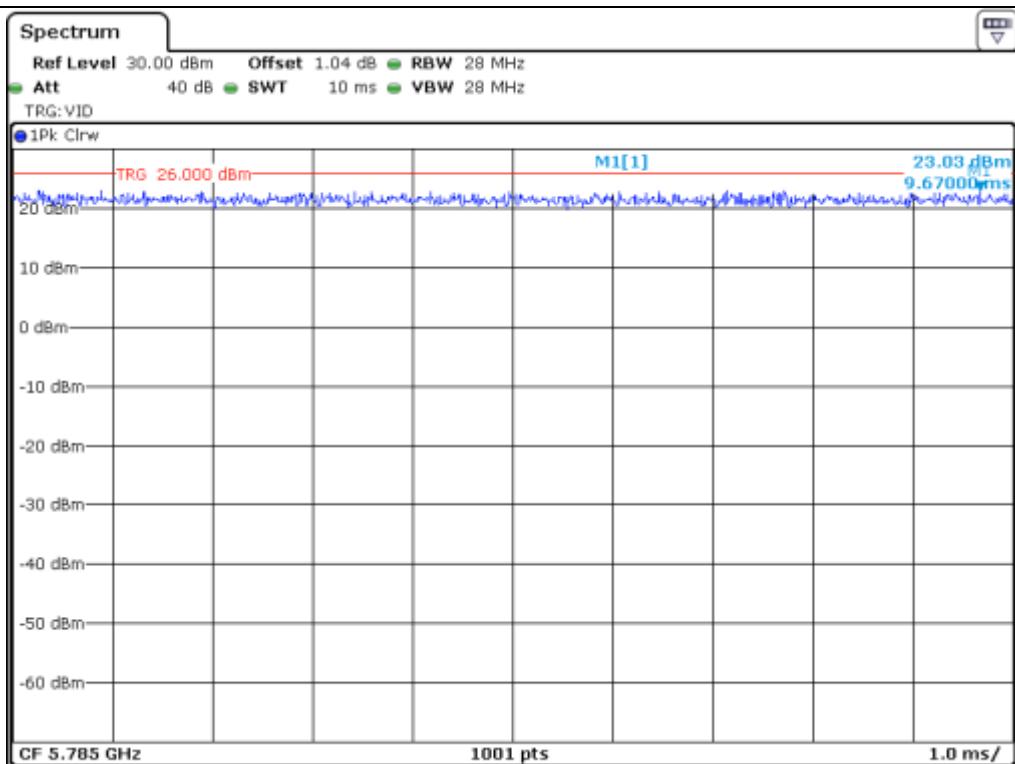


UNII 3_802.11 a_Antenna 1

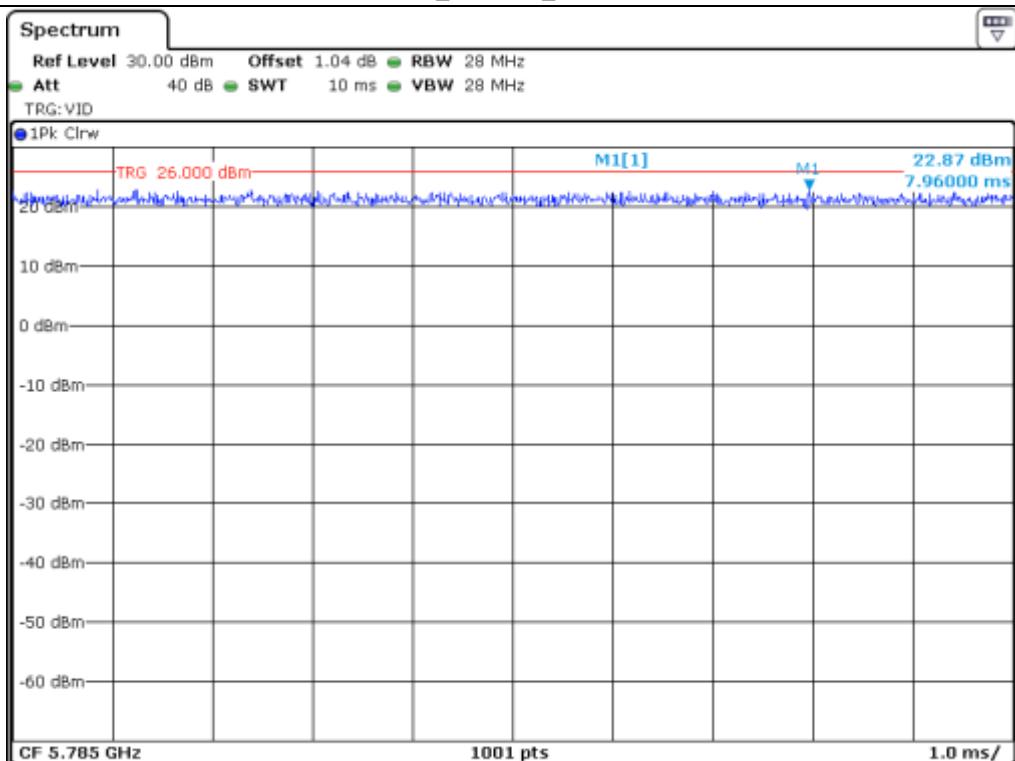

UNII 3_802.11 HT 20_Antenna 1

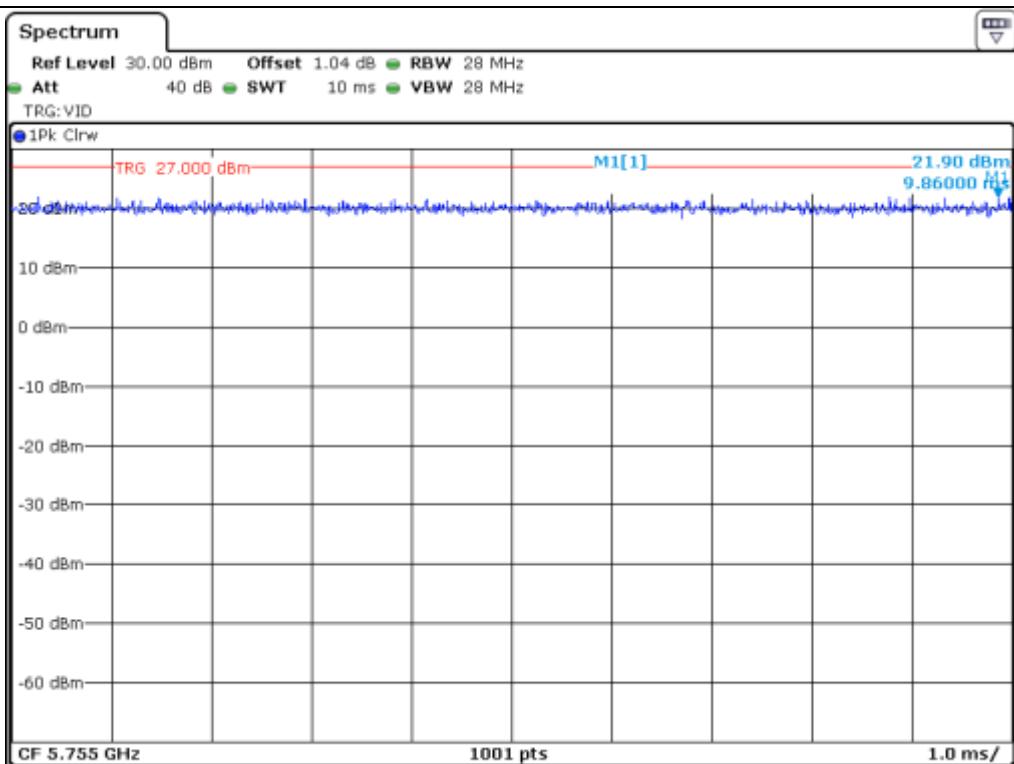

UNII 3_802.11 HT40_Antenna 1

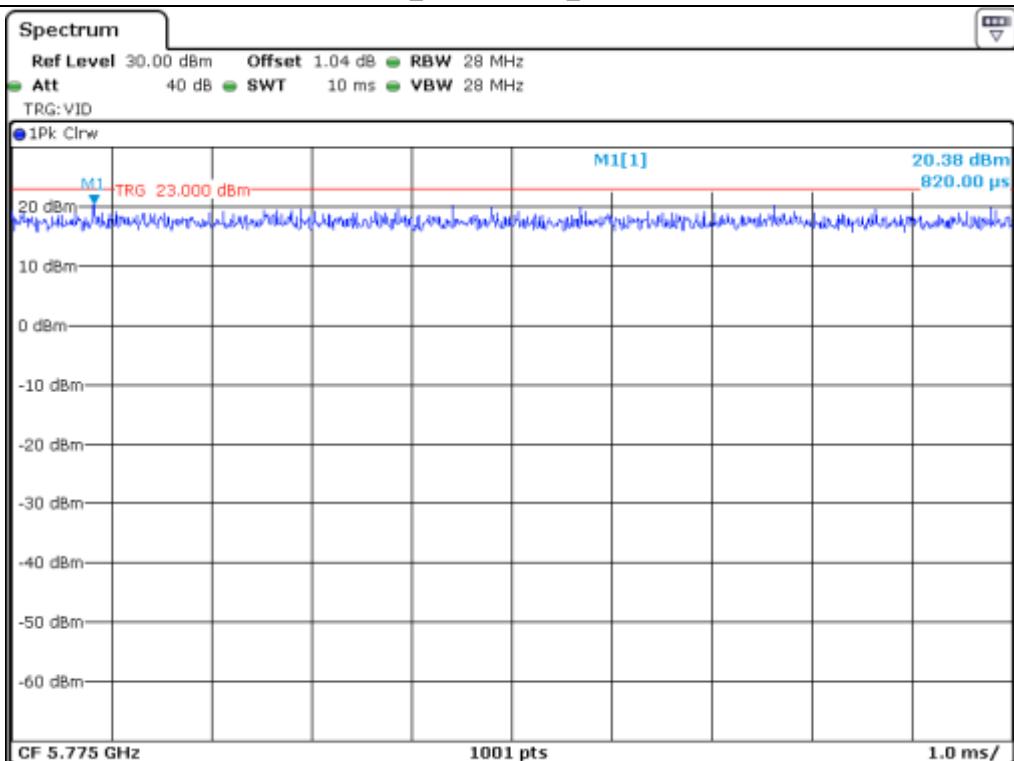

UNII 3_802.11 VHT 80_Antenna 1

5.4 Configuration of Test System

- Line Conducted Test:** The EUT was connected to USB and the power of USB was connected to Notebook PC. All supporting equipments were connected to another LISN. Preliminary Power line Conducted Emission test was performed by using the procedure in ANSI C63.10: 2013 to determine the worse operating conditions.
- Radiated Emission Test:** Preliminary radiated emissions test were conducted using the procedure in ANSI C63.10: 2013 to determine the worse operating conditions. Final radiated emission tests were conducted at 3 meter Semi Anechoic Chamber. The turntable was rotated through 360 degrees and the EUT was tested by positioned three orthogonal planes to obtain the highest reading on the field strength meter. Once maximum reading was determined, the search antenna was raised and lowered in both vertical and horizontal polarization.

5.5 Antenna Requirement

For intentional device, according to section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Antenna Construction:

The antenna of the EUT is a Chip Antenna on the main board in the EUT, so no consideration of replacement by the user.

6. PRELIMINARY TEST

6.1 AC Power line Conducted Emissions Tests

During Preliminary Test, the following operating mode was investigated.

Operation Mode	The Worse operating condition (Please check one only)
Transmitting Mode	X

6.2 General Radiated Emissions Tests

During Preliminary Test, the following operating mode was investigated.

Operation Mode	The Worse operating condition (Please check one only)
Transmitting Mode	X

7. MINIMUM 26 dB BANDWIDTH

7.1 Operating environment

Temperature : 23 °C

Relative humidity : 41 % R.H.

7.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz, and peak detection was used. The 26 dB bandwidth is defined as the total spectrum over which the power is higher than the peak power minus 26 dB.



7.3 Test Date

August 21, 2020 ~ September 08, 2020


7.4 Test data for 802.11a RLAN Mode


7.4.1 Test data for Antenna 0

- Test Result : Pass


FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	26 dB Bandwidth (MHz)
5 150 ~ 5 250	Low	5 180.00	20.58
	Middle	5 220.00	20.03
	High	5 240.00	19.93
5 250 ~ 5 350	Low	5 260.00	20.08
	Middle	5 300.00	20.03
	High	5 320.00	19.98
5 470 ~ 5 725	Low	5 500.00	20.03
	Middle	5 580.00	19.73
	High	5 700.00	19.78
5 725 ~ 5 850	Low	5 745.00	19.98
	Middle	5 785.00	20.03
	High	5 825.00	19.63

Remark: See next page for measurement data.

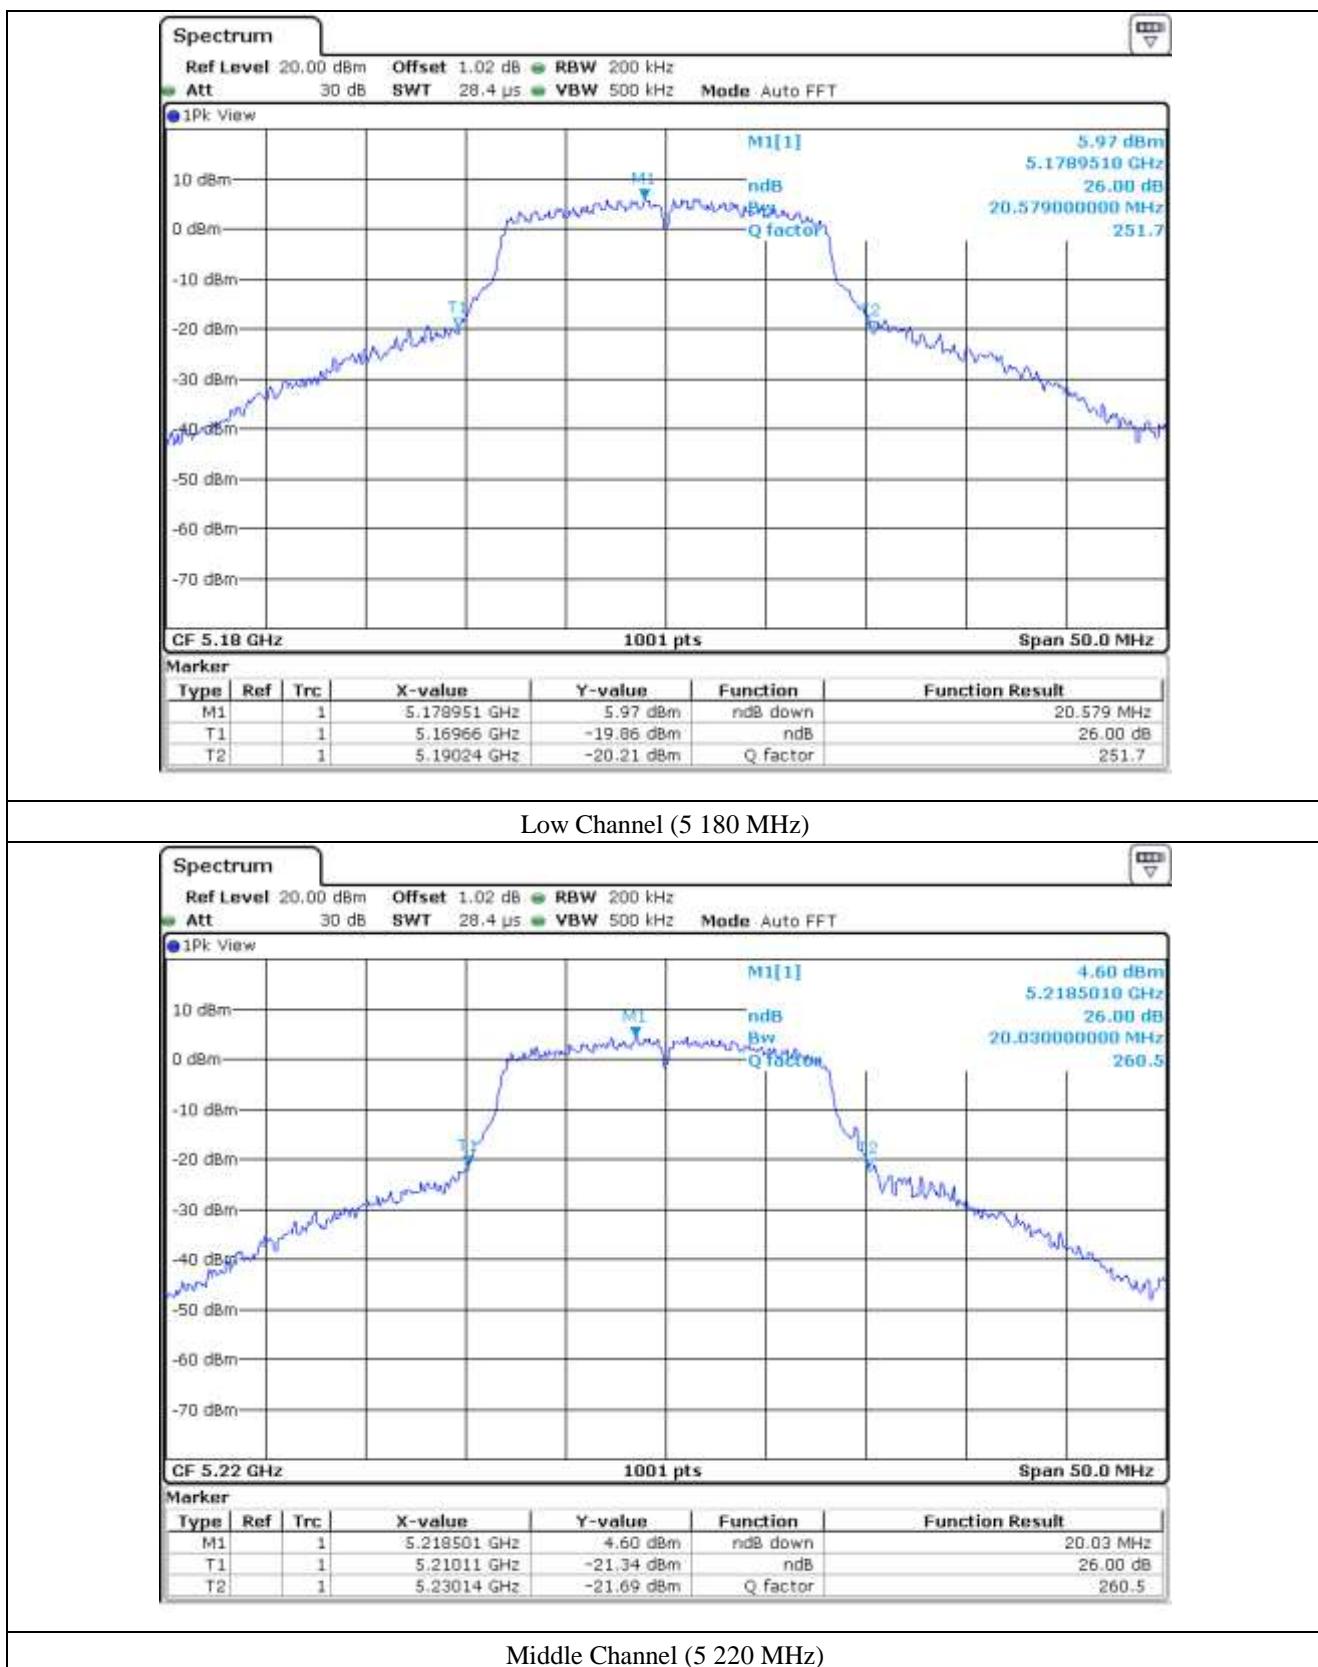


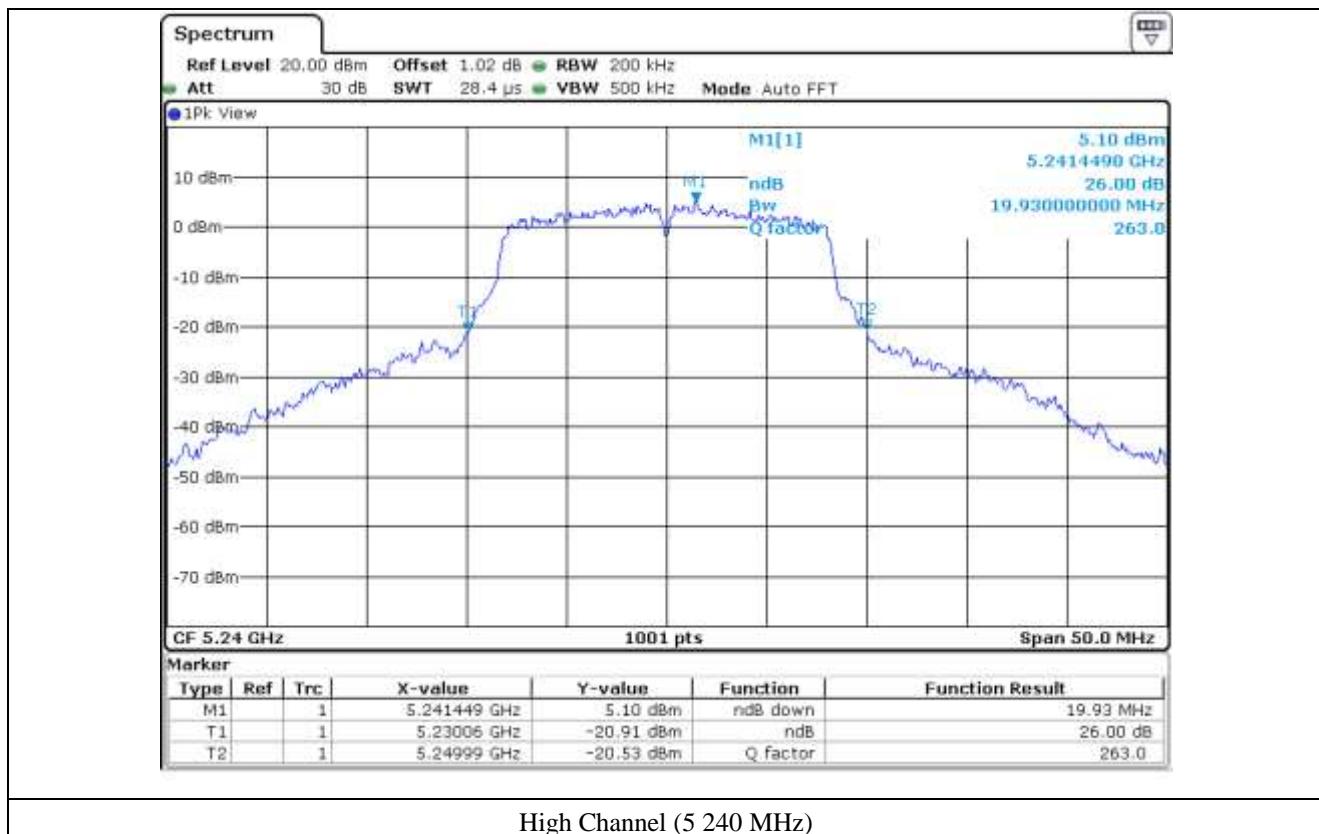





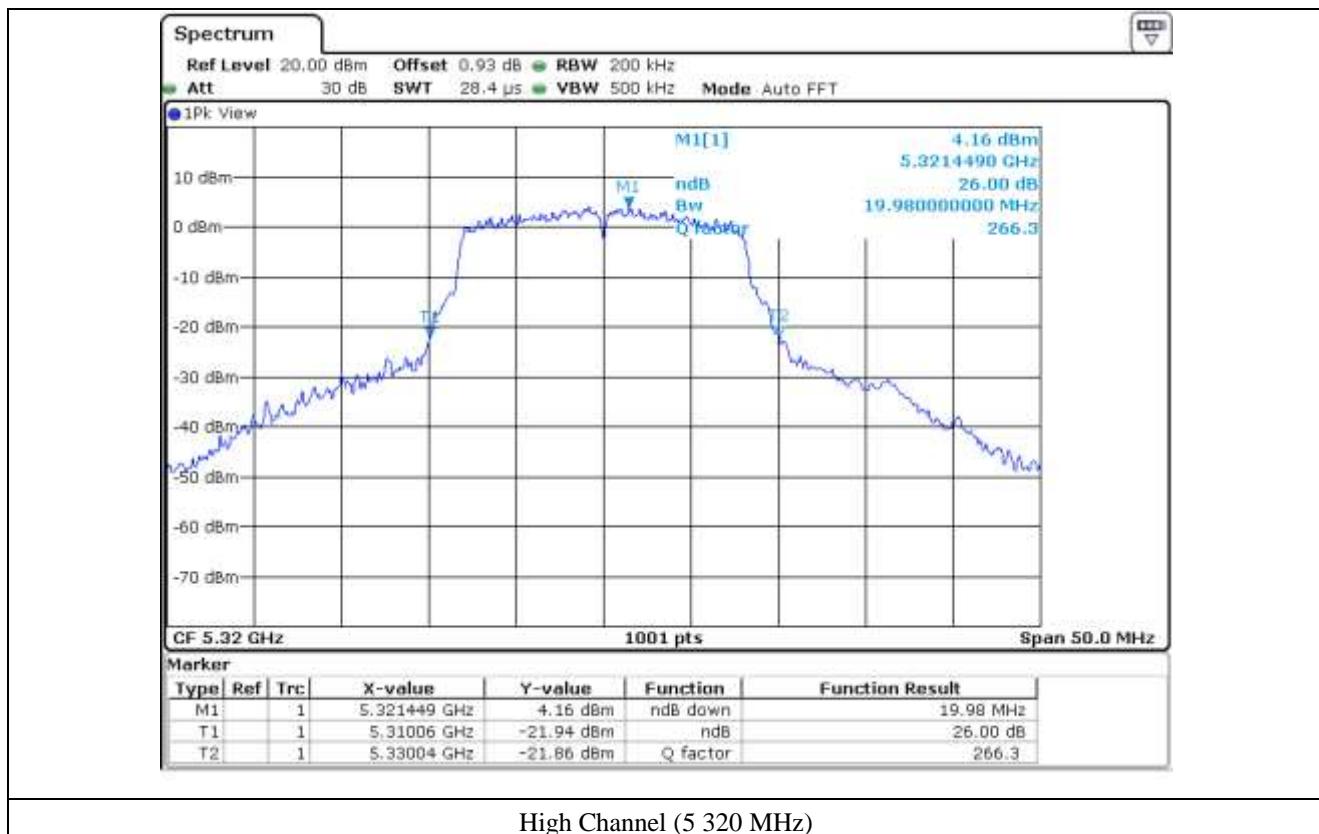



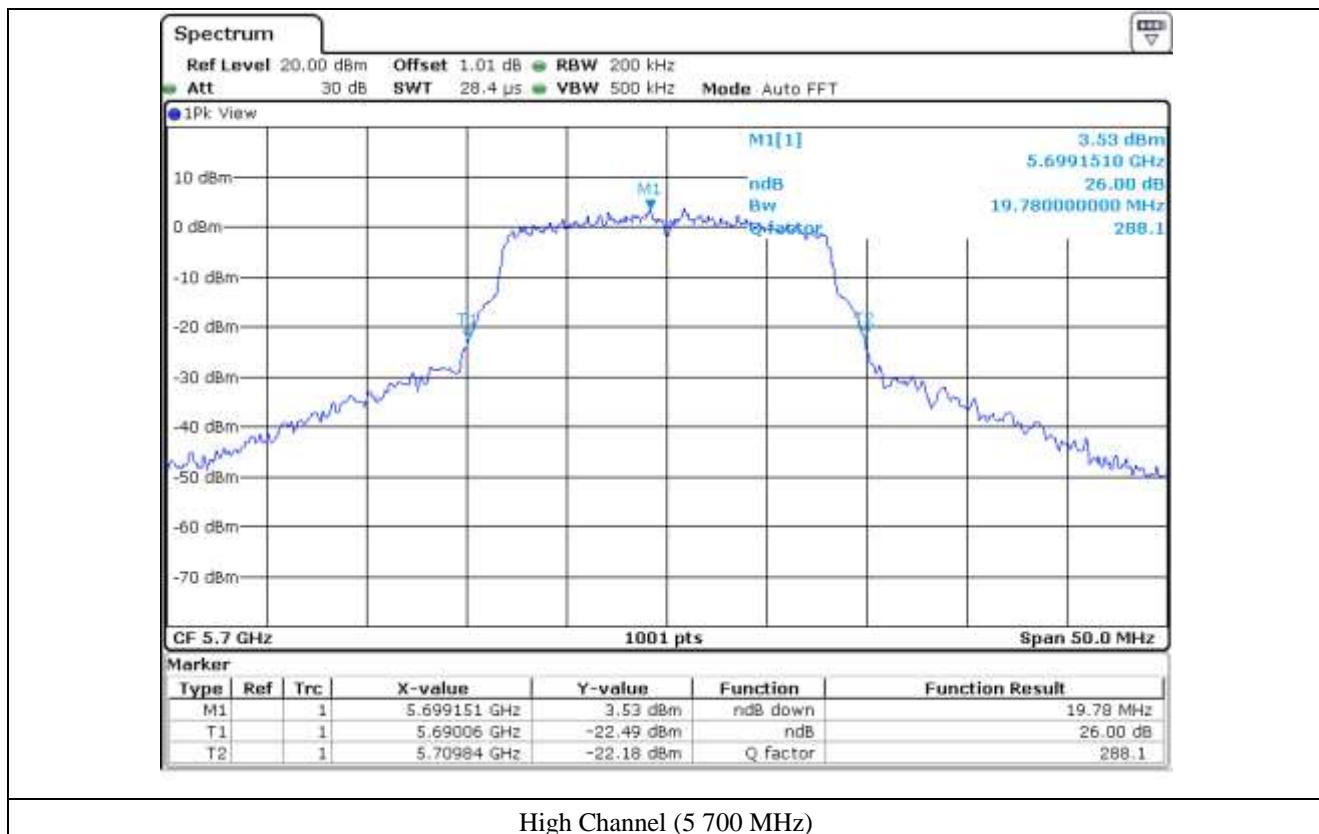

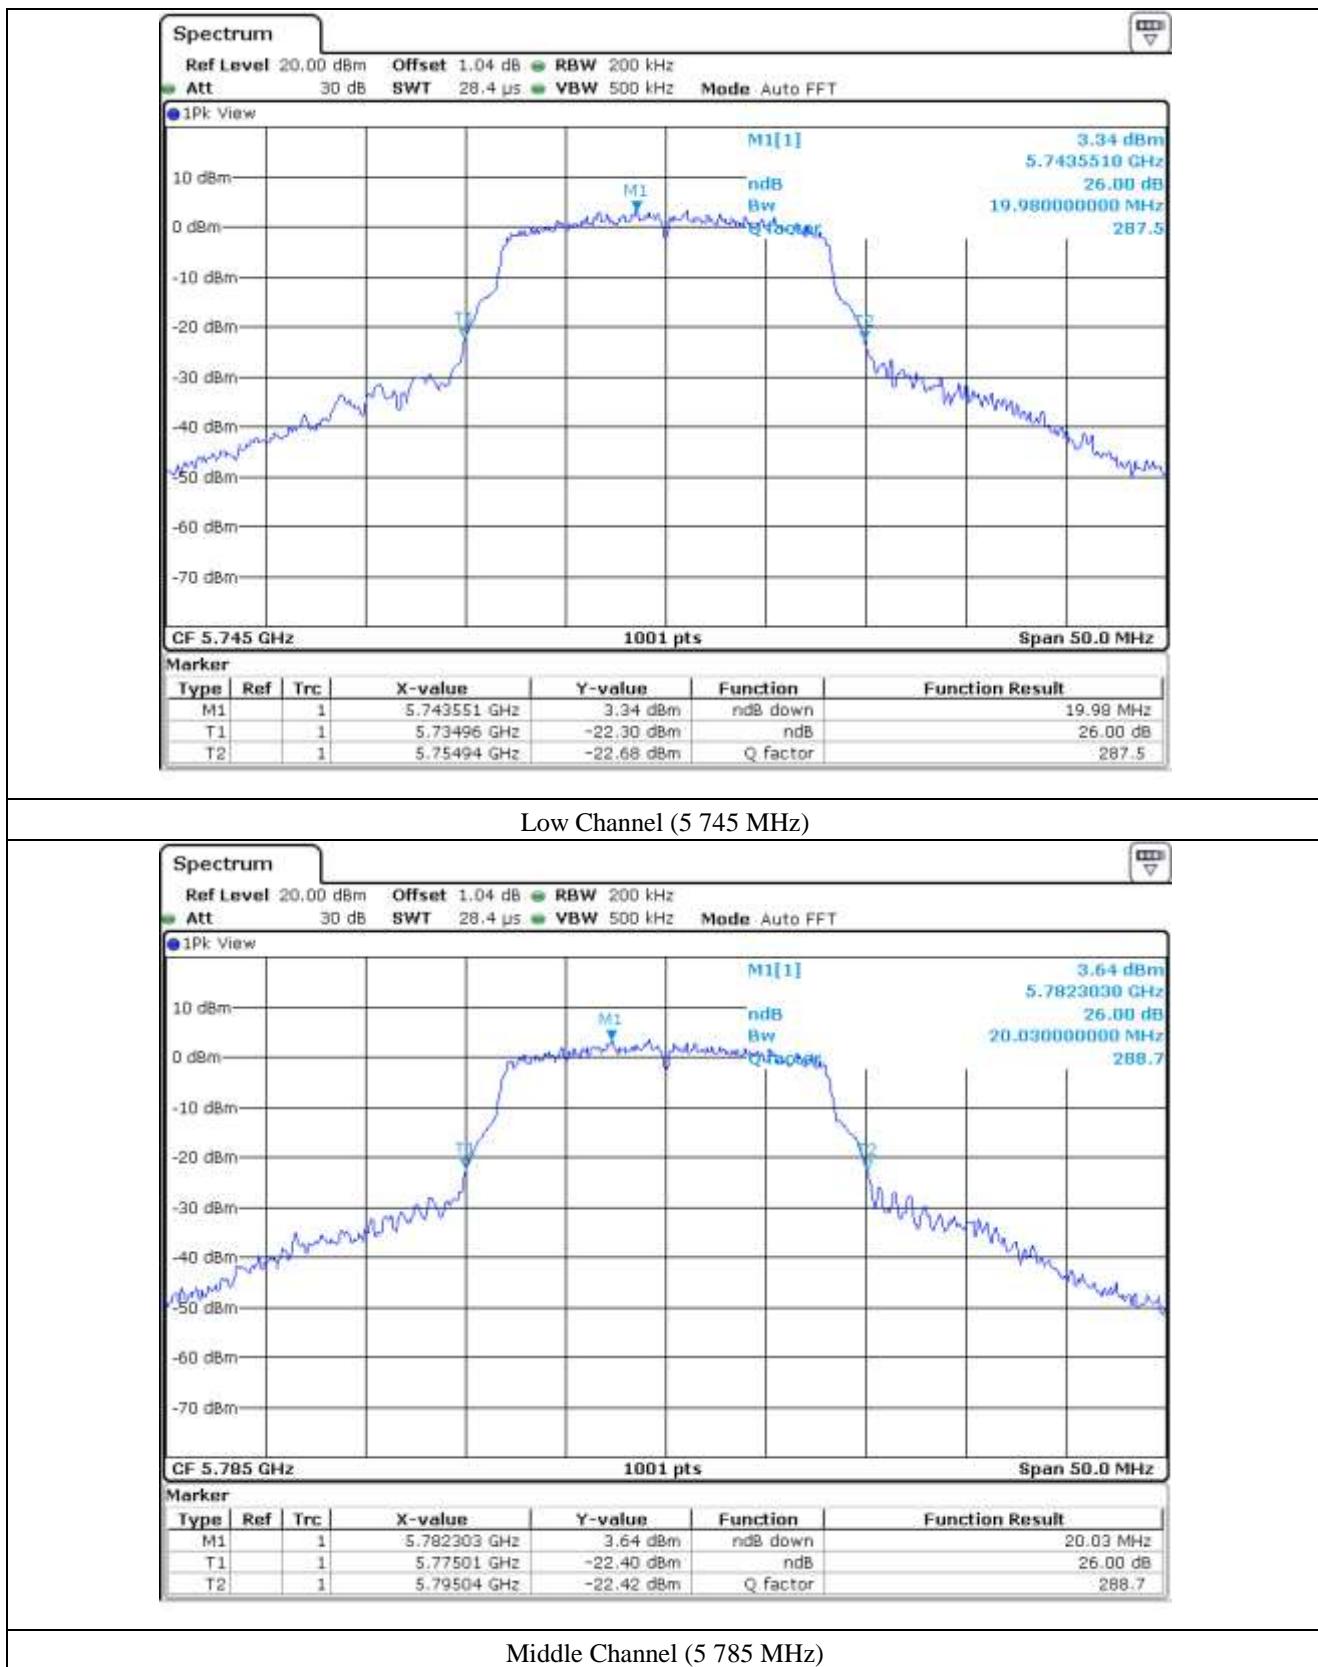

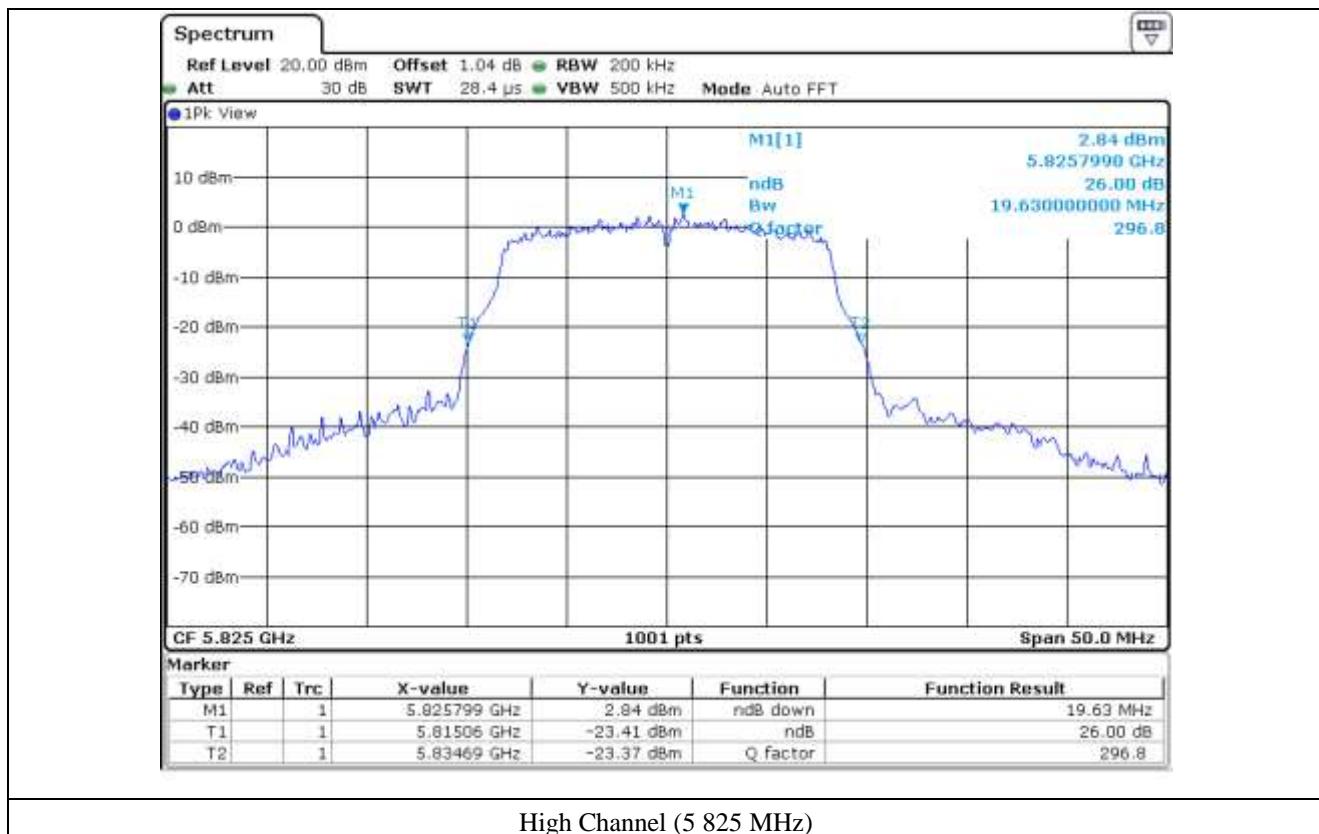



7.4.2 Test data for Antenna 1


-. Test Result : Pass


FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	26 dB Bandwidth (MHz)
5 150 ~ 5 250	Low	5 180.00	20.03
	Middle	5 220.00	19.93
	High	5 240.00	20.18
5 250 ~ 5 350	Low	5 260.00	19.93
	Middle	5 300.00	20.13
	High	5 320.00	20.68
5 470 ~ 5 725	Low	5 500.00	20.68
	Middle	5 580.00	20.33
	High	5 700.00	19.93
5 725 ~ 5 850	Low	5 745.00	20.03
	Middle	5 785.00	19.93
	High	5 825.00	19.83


Remark: See next page for measurement data.

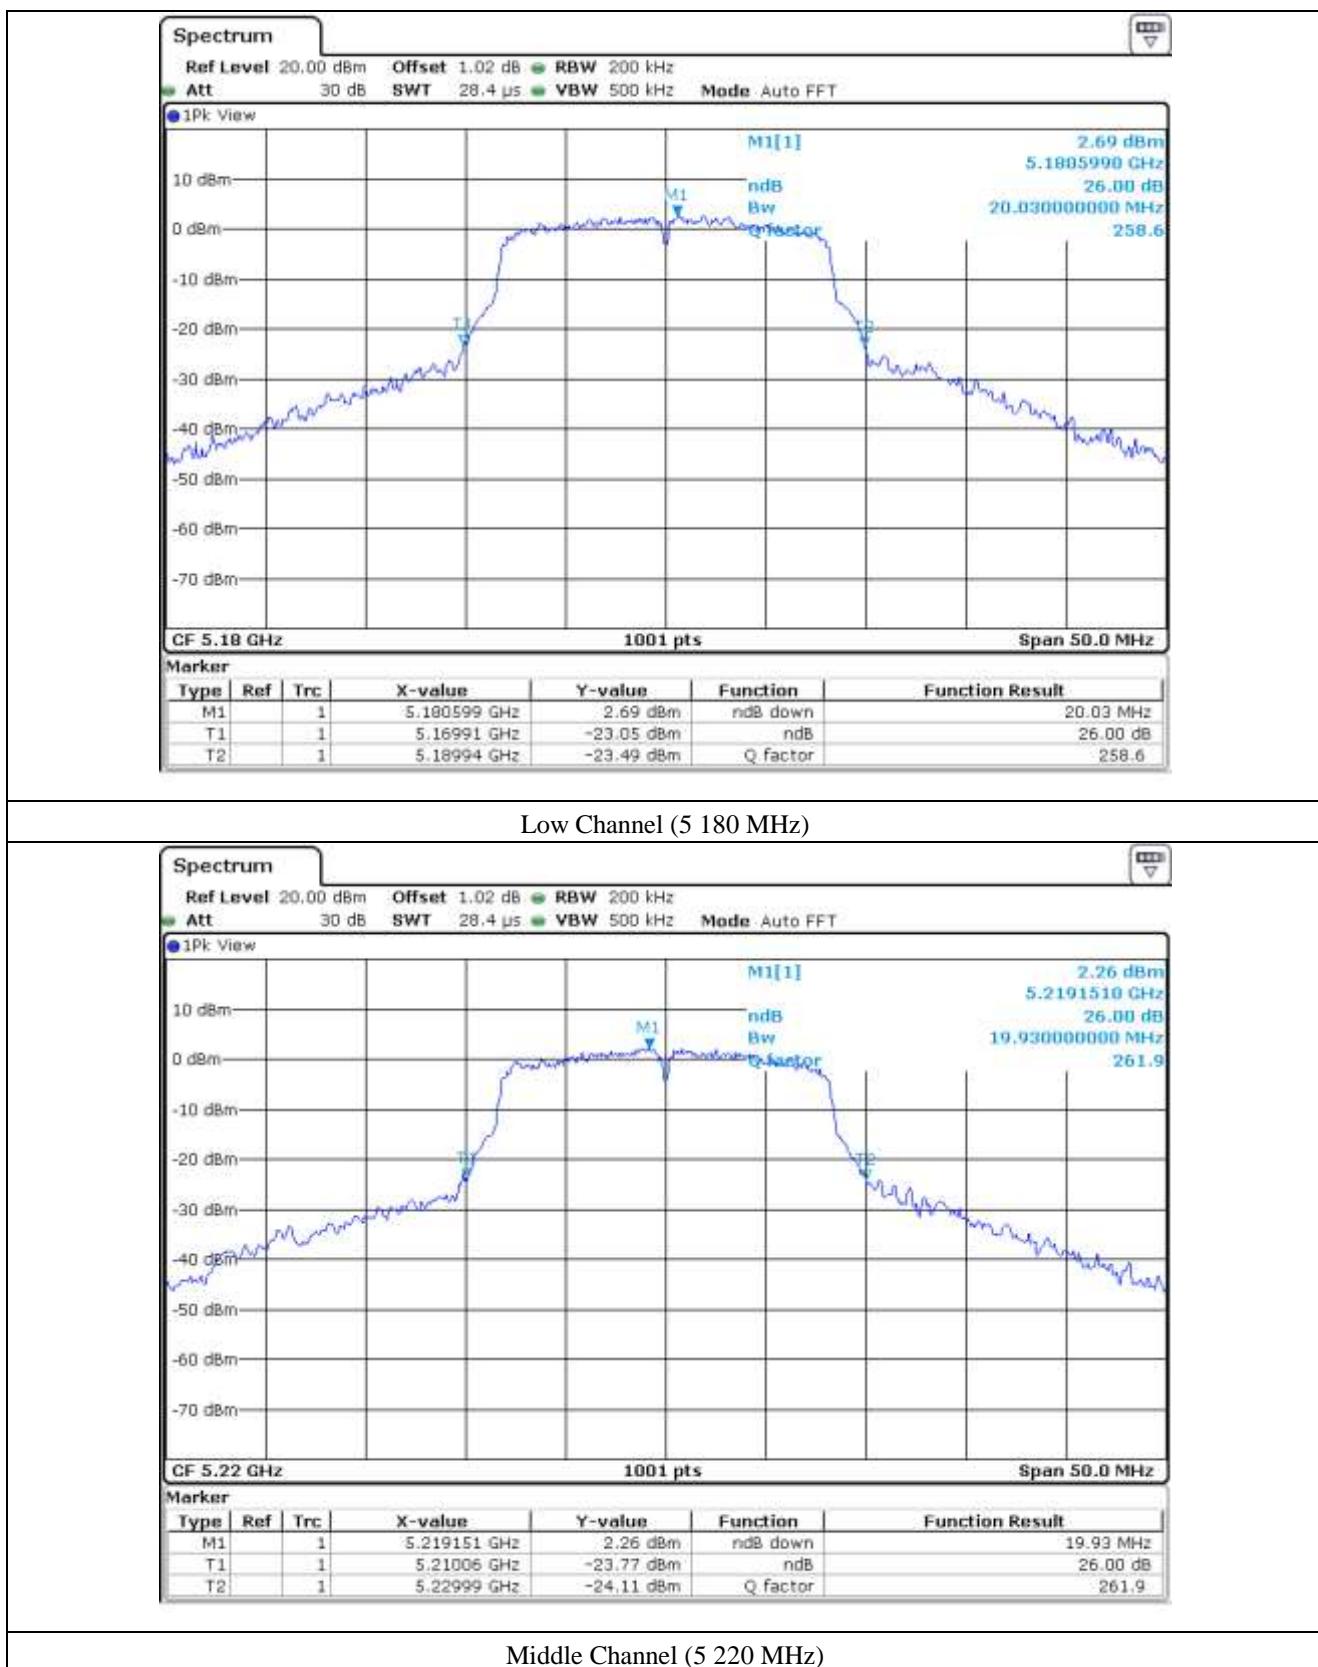


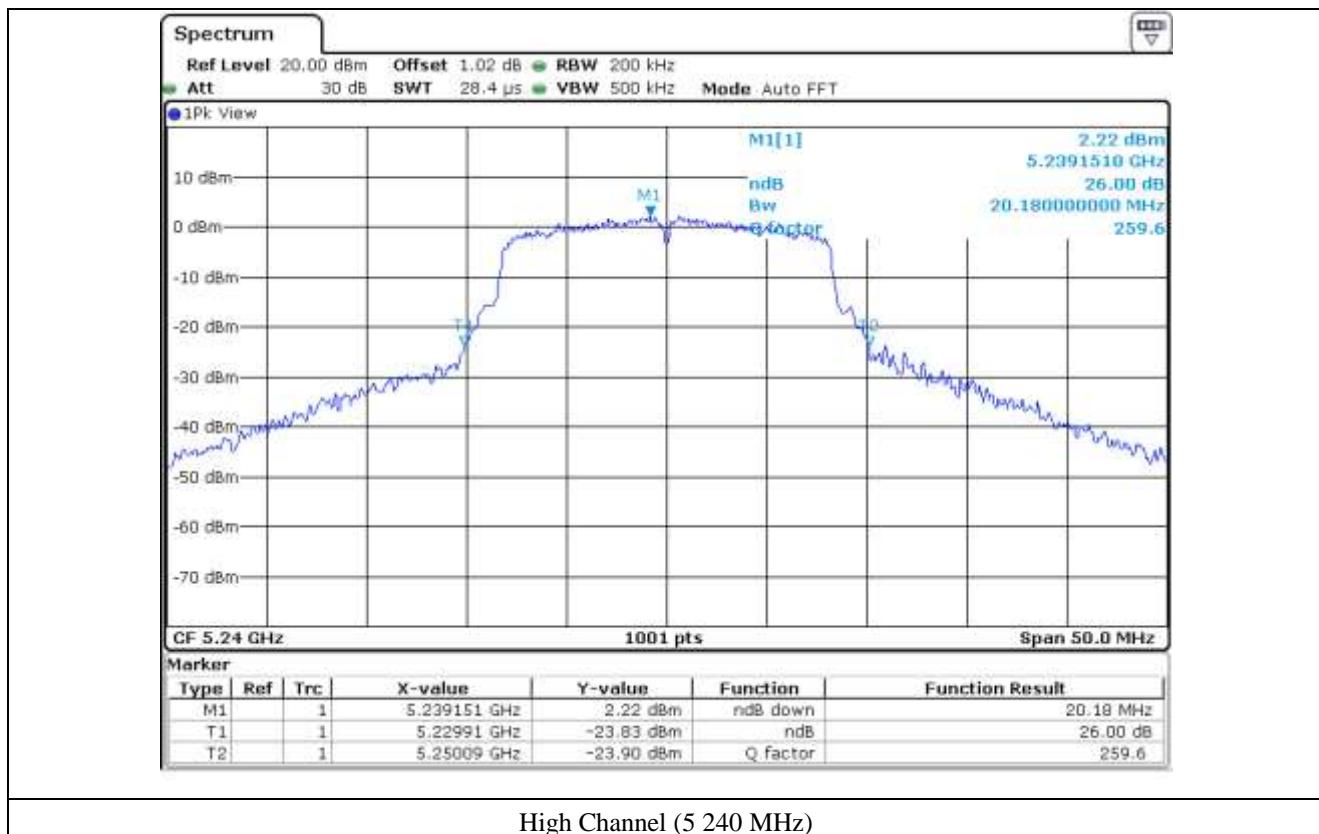


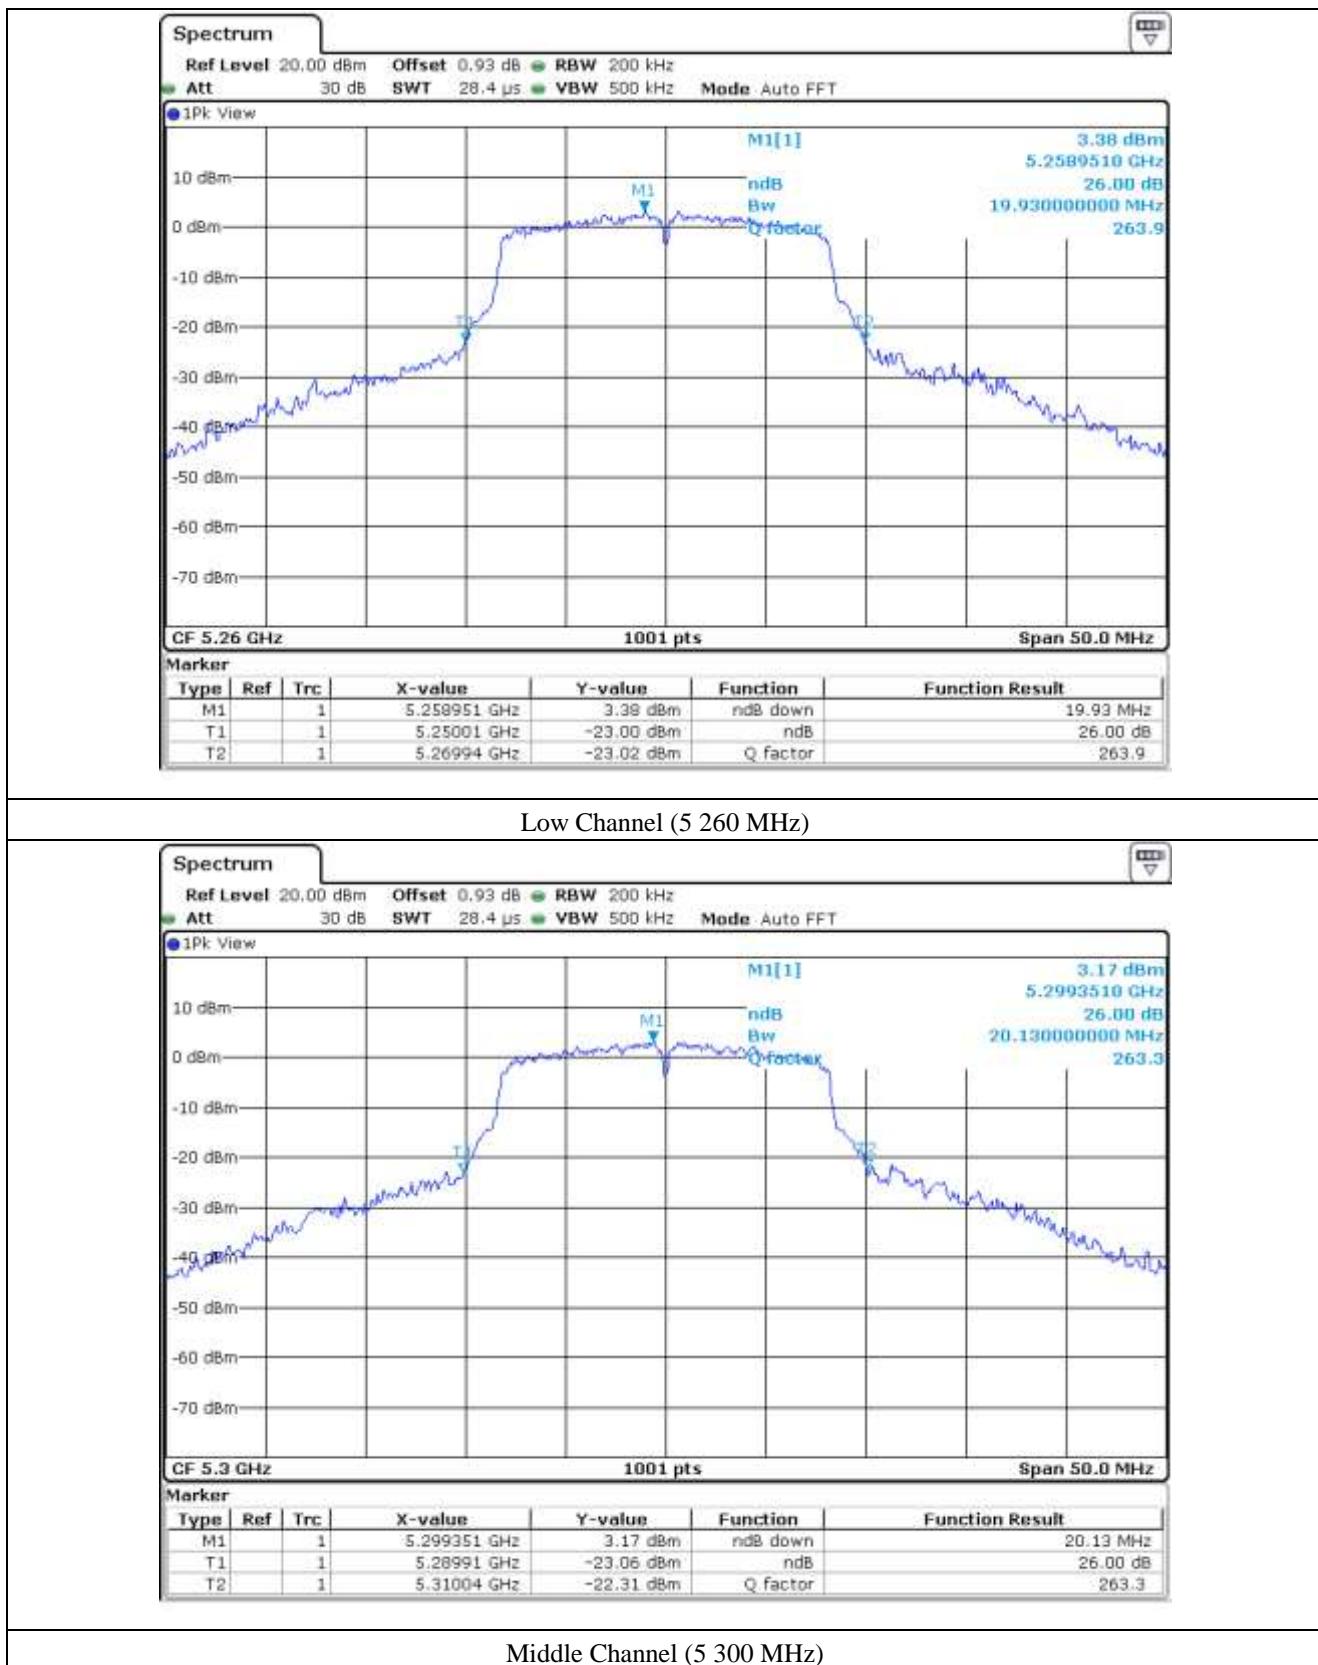


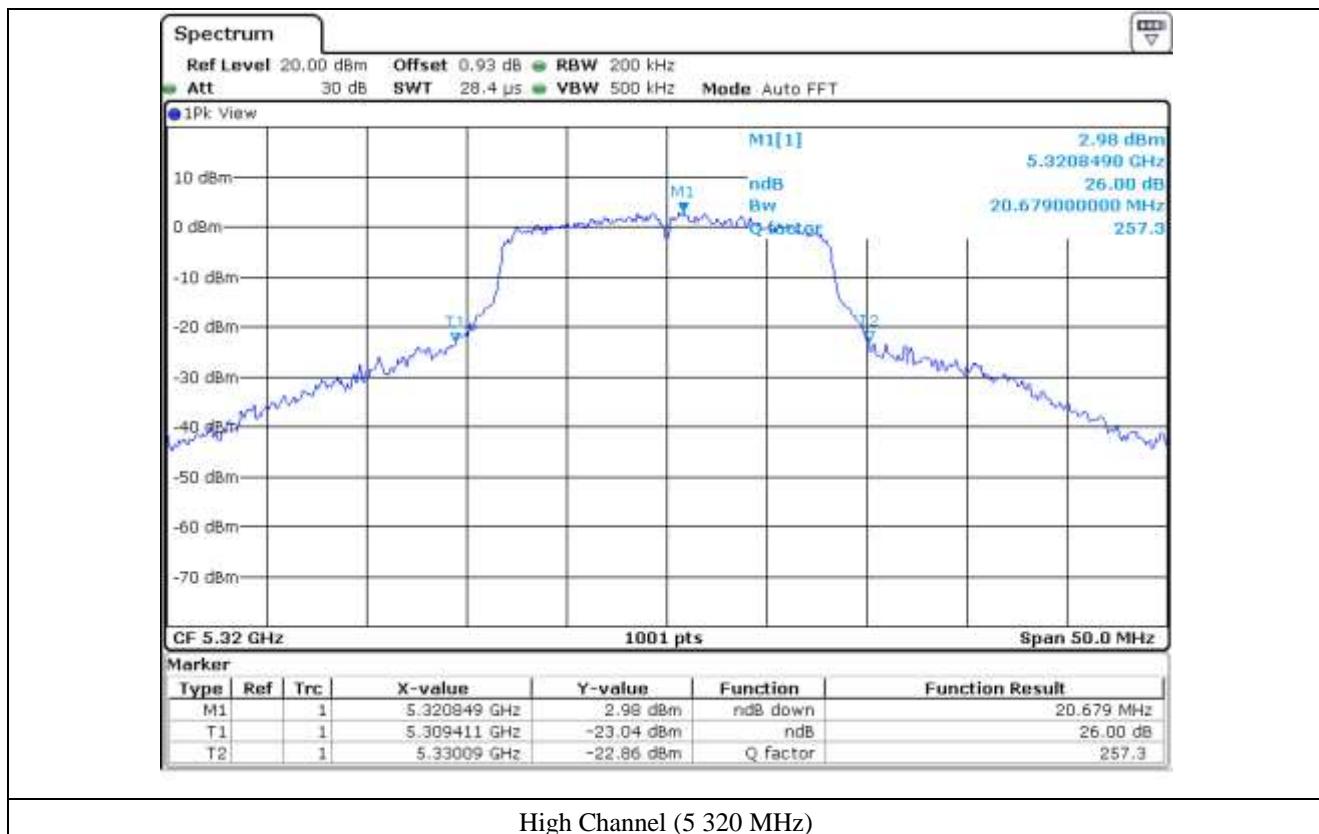

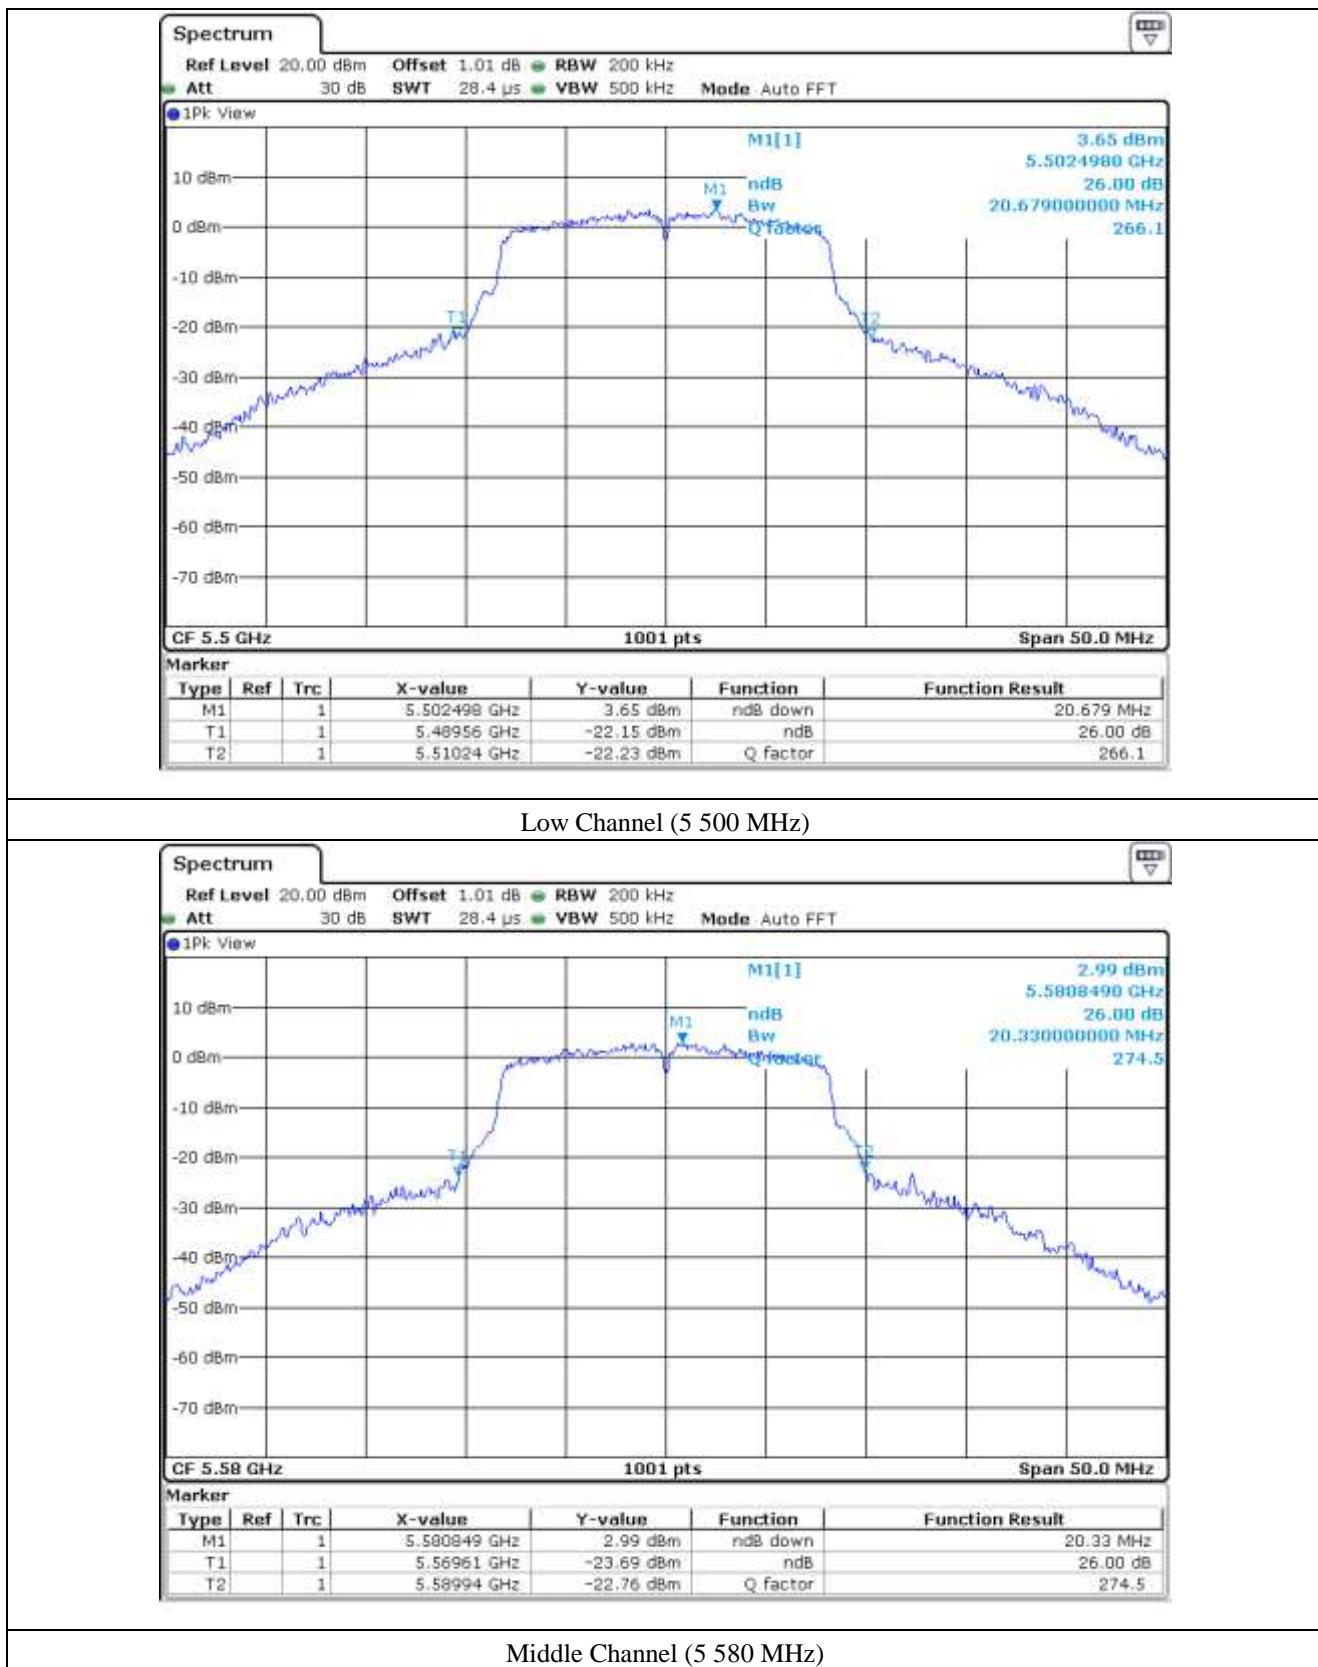

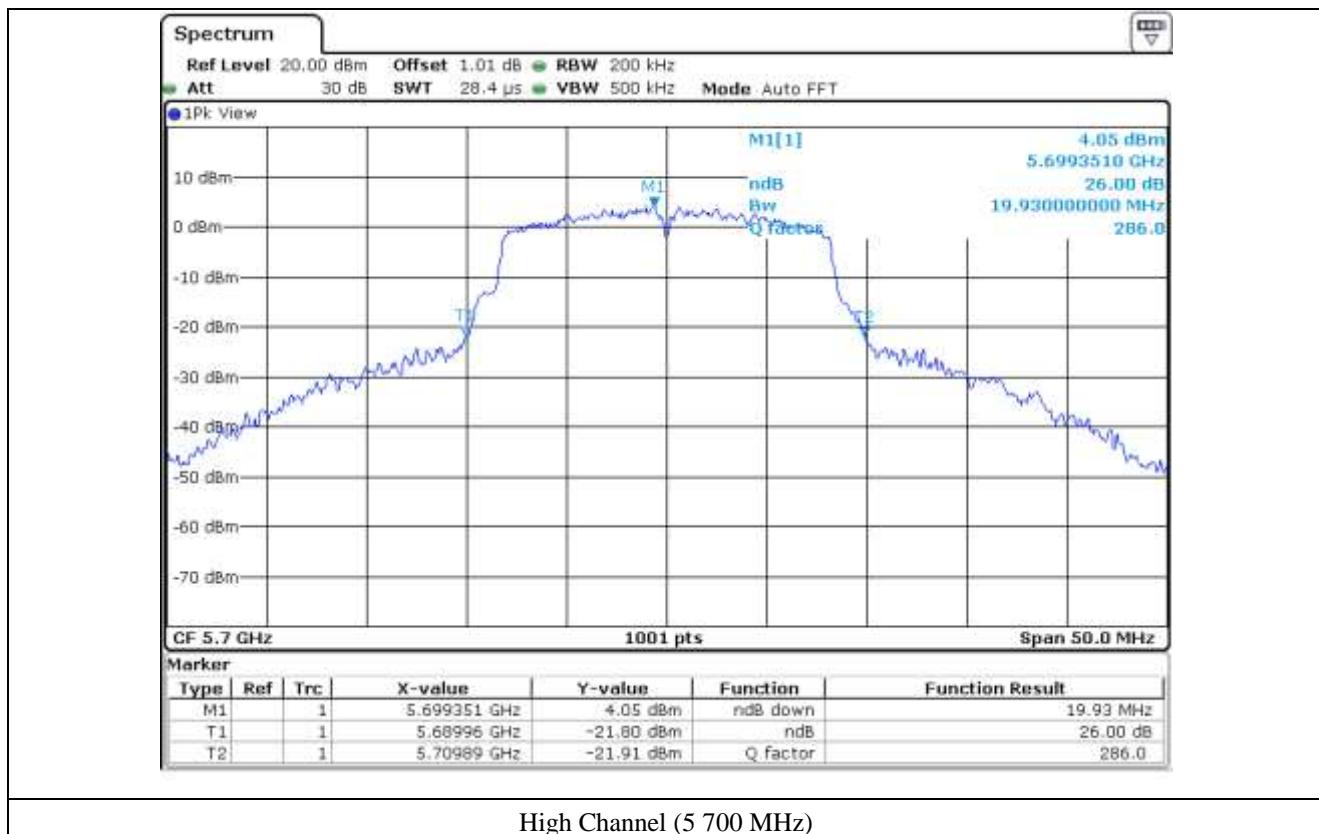

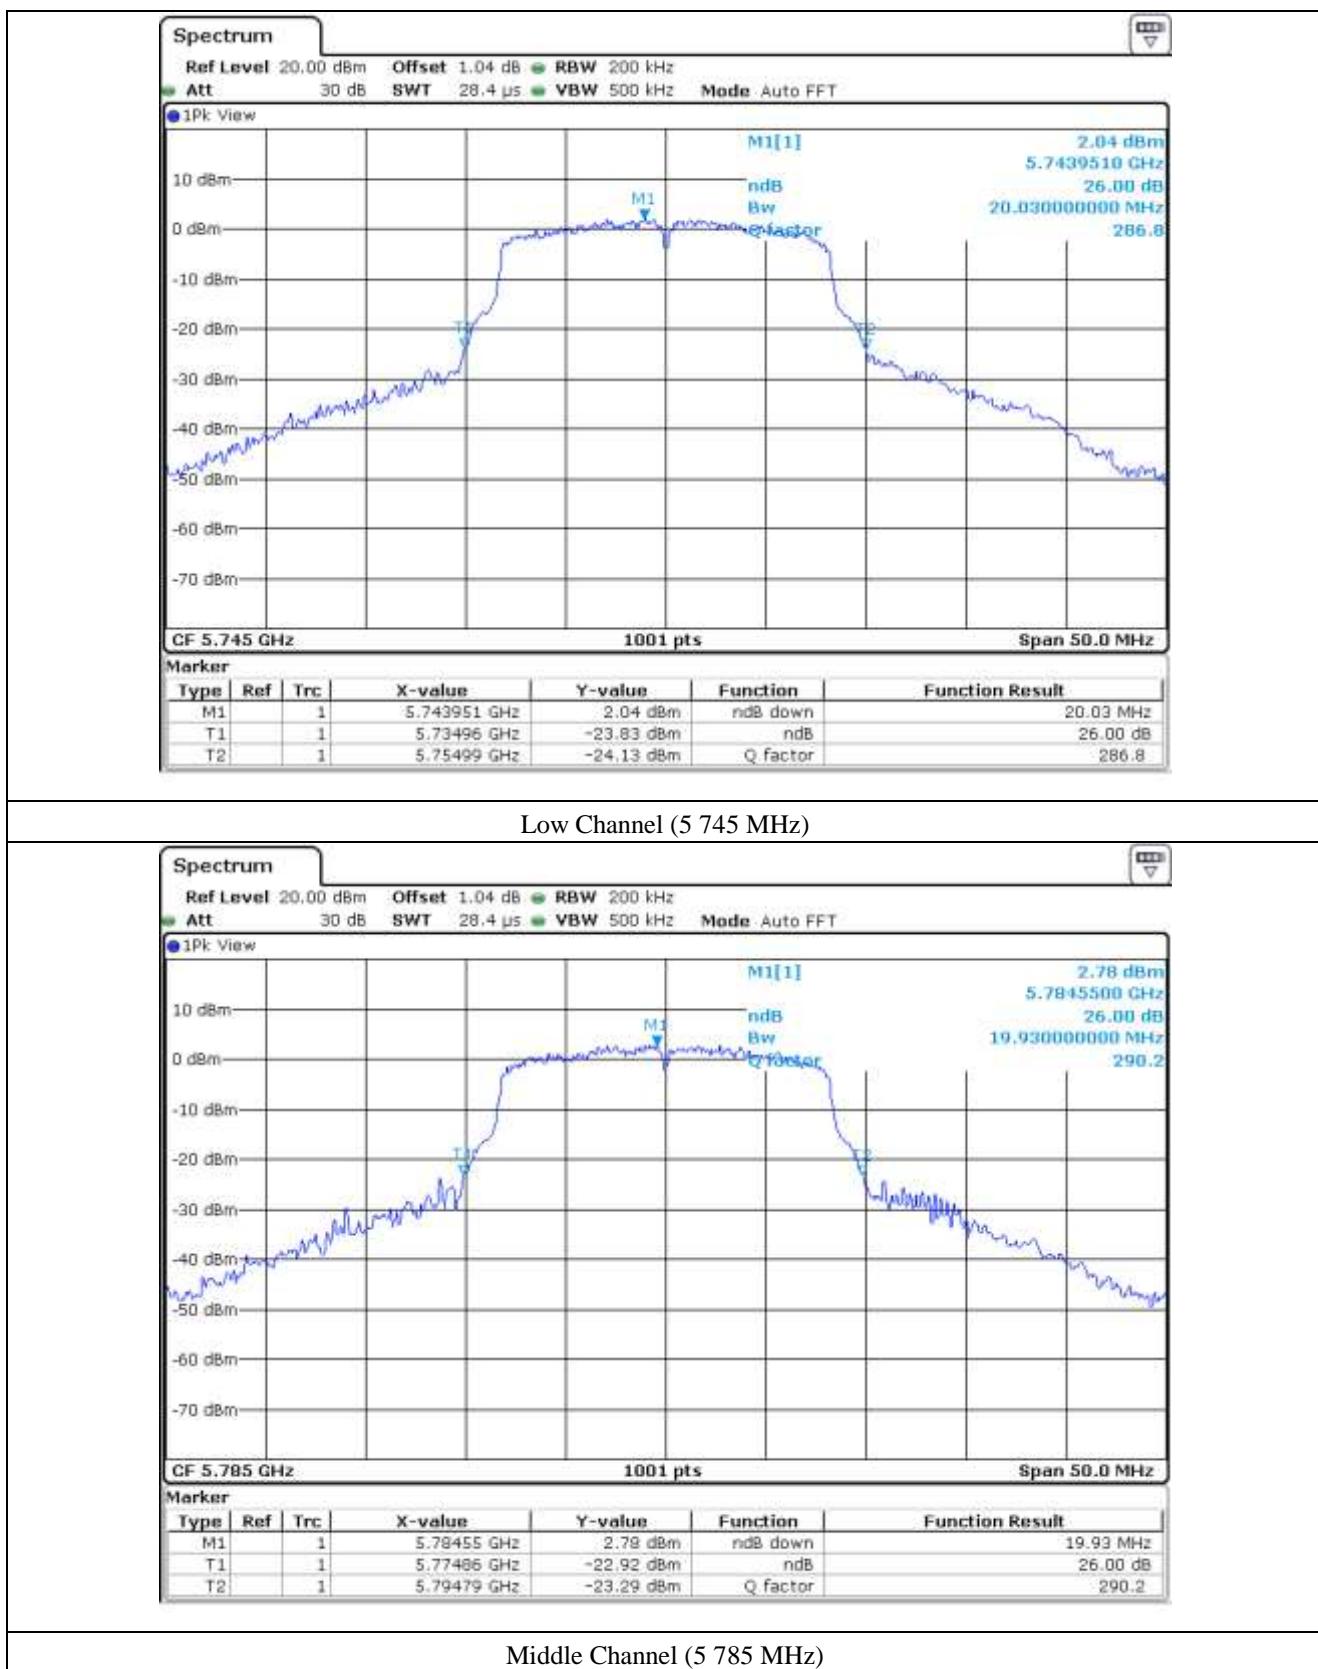


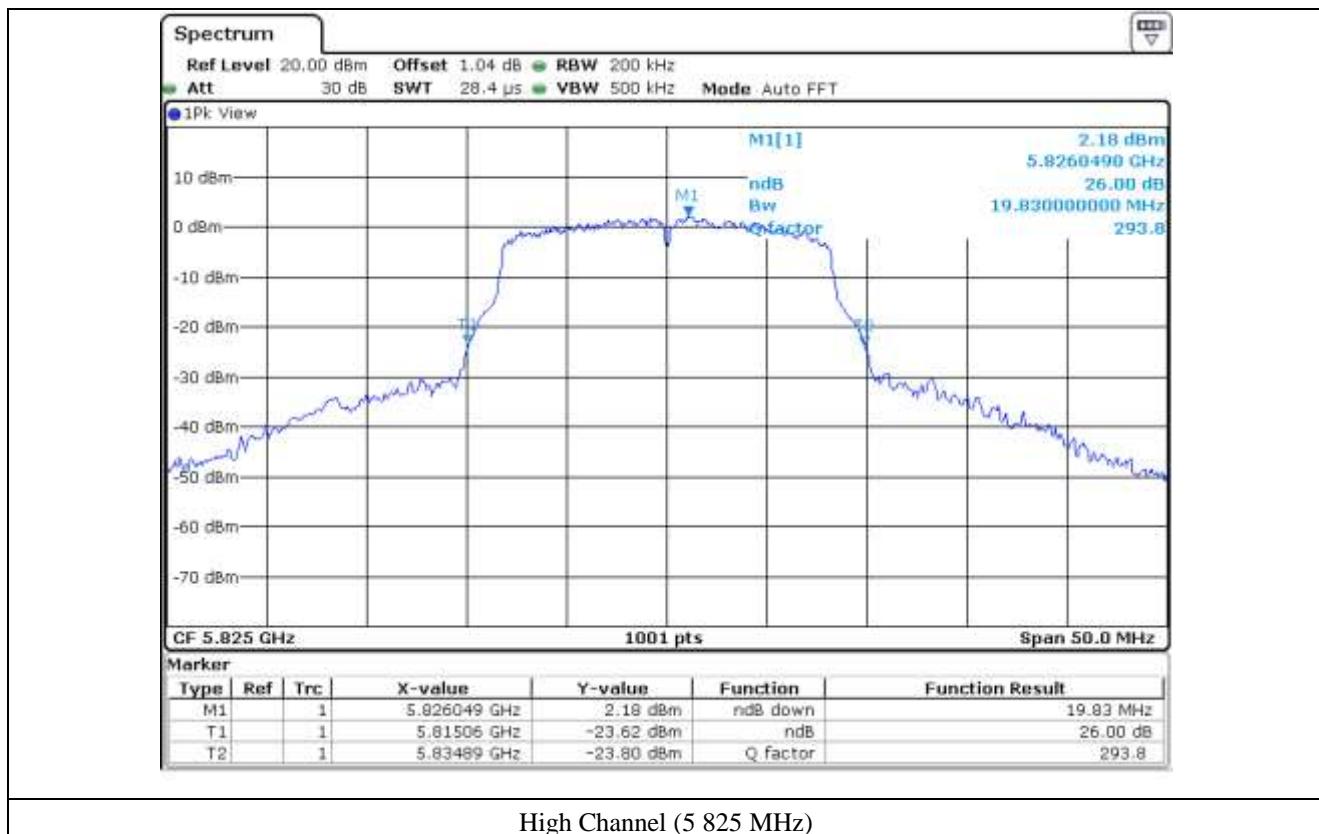

7.4.3 Test data for Staddle Channel_Antenna 0

- Test Result : Pass


FREQUENCY RANGE (MHz)	FREQUENCY (MHz)	26 dB Bandwidth (MHz)
5 470 ~ 5 725	5 720.00	14.84
5 725 ~ 5 850	5 720.00	4.89

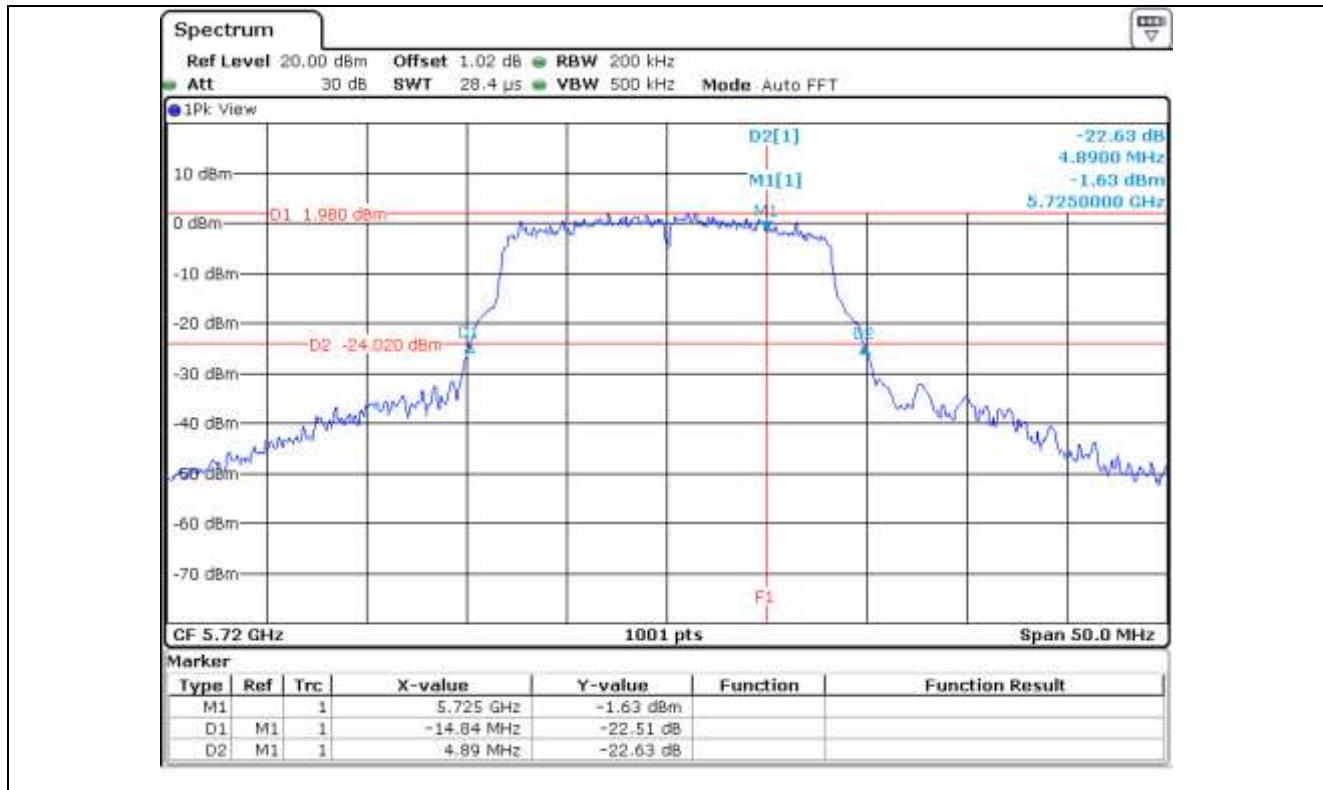

7.4.4 Test data for Staddle Channel_Antenna 1

- Test Result : Pass

FREQUENCY RANGE (MHz)	FREQUENCY (MHz)	26 dB Bandwidth (MHz)
5 470 ~ 5 725	5 720.00	15.09
5 725 ~ 5 850	5 720.00	5.04

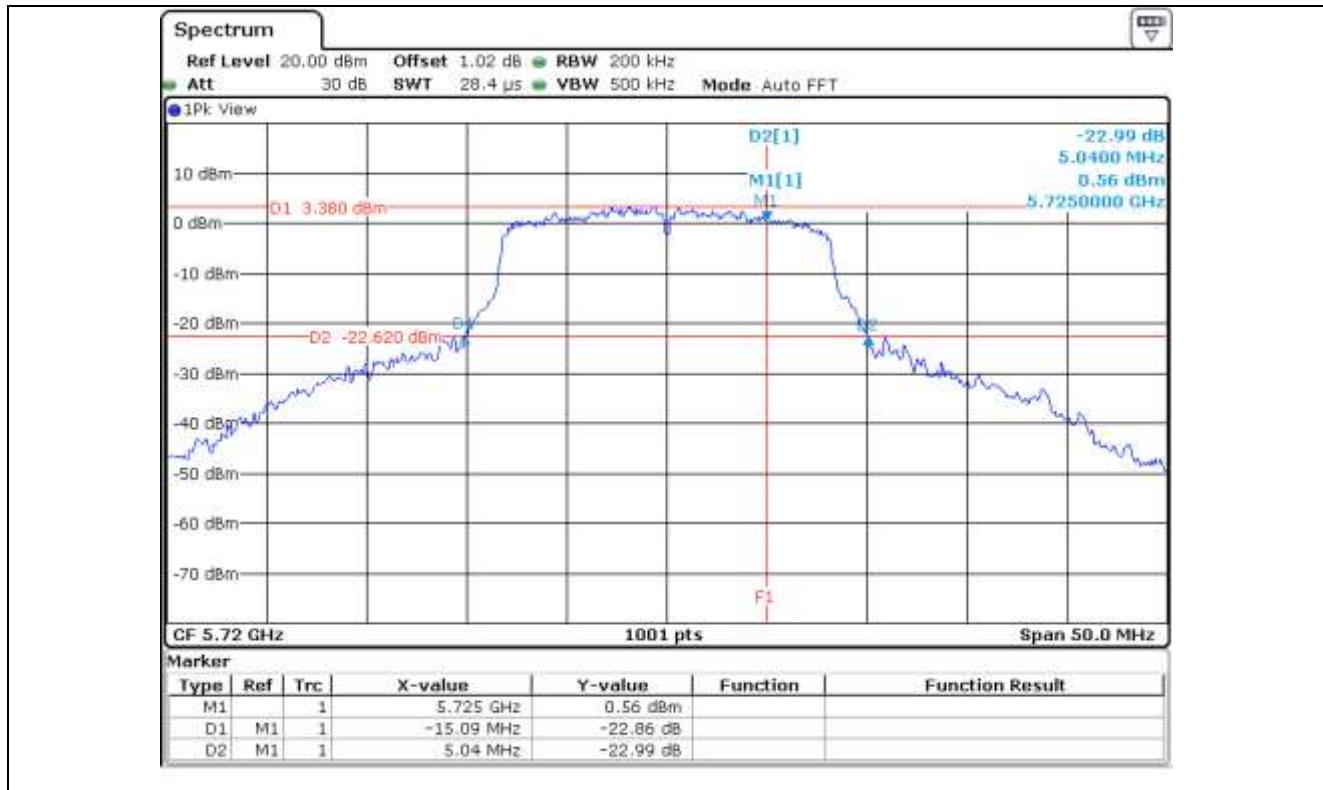

7.5 Test data for 802.11n_HT20 RLAN Mode


7.5.1 Test data for Antenna 0


- Test Result : Pass


FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	26 dB Bandwidth (MHz)
5 150 ~ 5 250	Low	5 180.00	20.23
	Middle	5 220.00	20.38
	High	5 240.00	20.33
5 250 ~ 5 350	Low	5 260.00	20.23
	Middle	5 300.00	20.13
	High	5 320.00	20.18
5 470 ~ 5 725	Low	5 500.00	20.23
	Middle	5 580.00	20.23
	High	5 700.00	20.13
5 725 ~ 5 850	Low	5 745.00	20.08
	Middle	5 785.00	19.93
	High	5 825.00	20.28


Remark: See next page for measurement data.




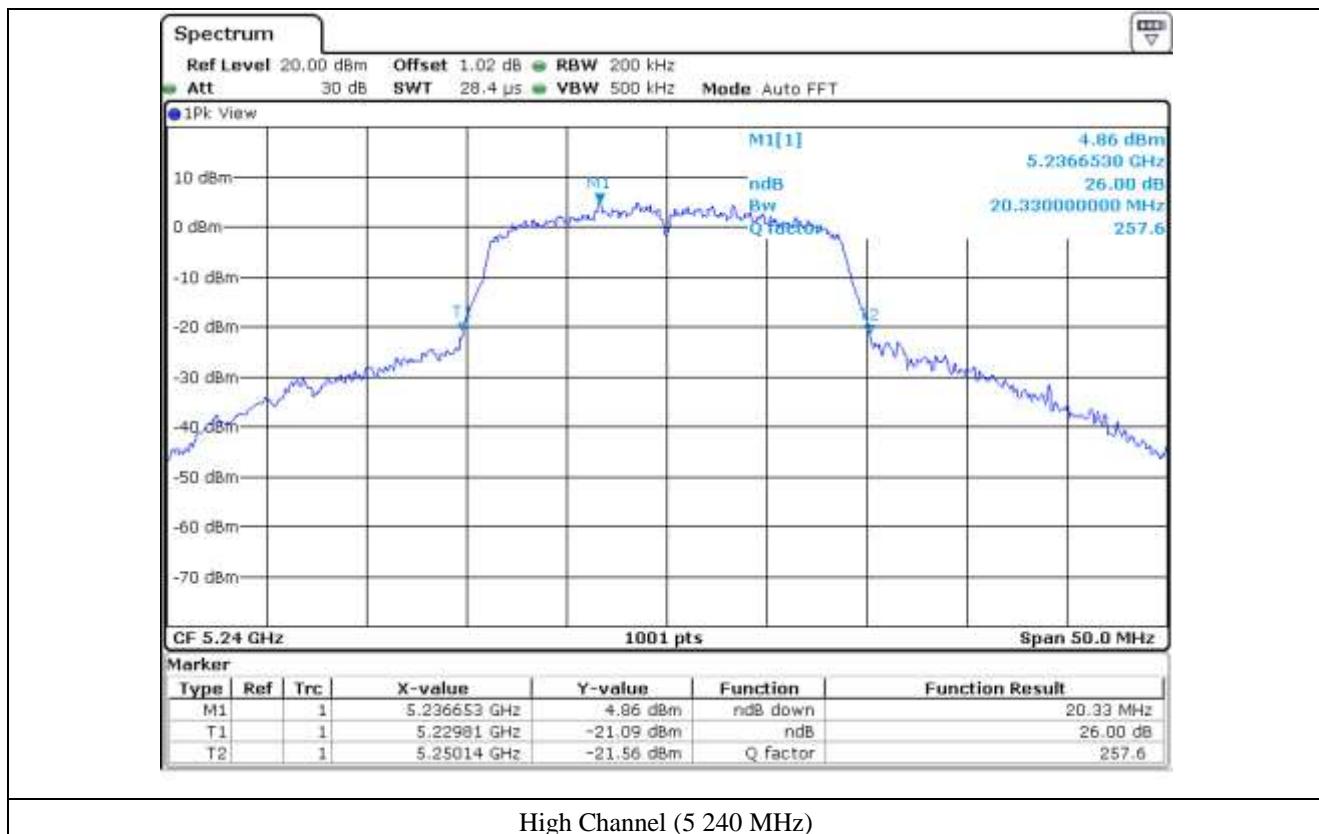


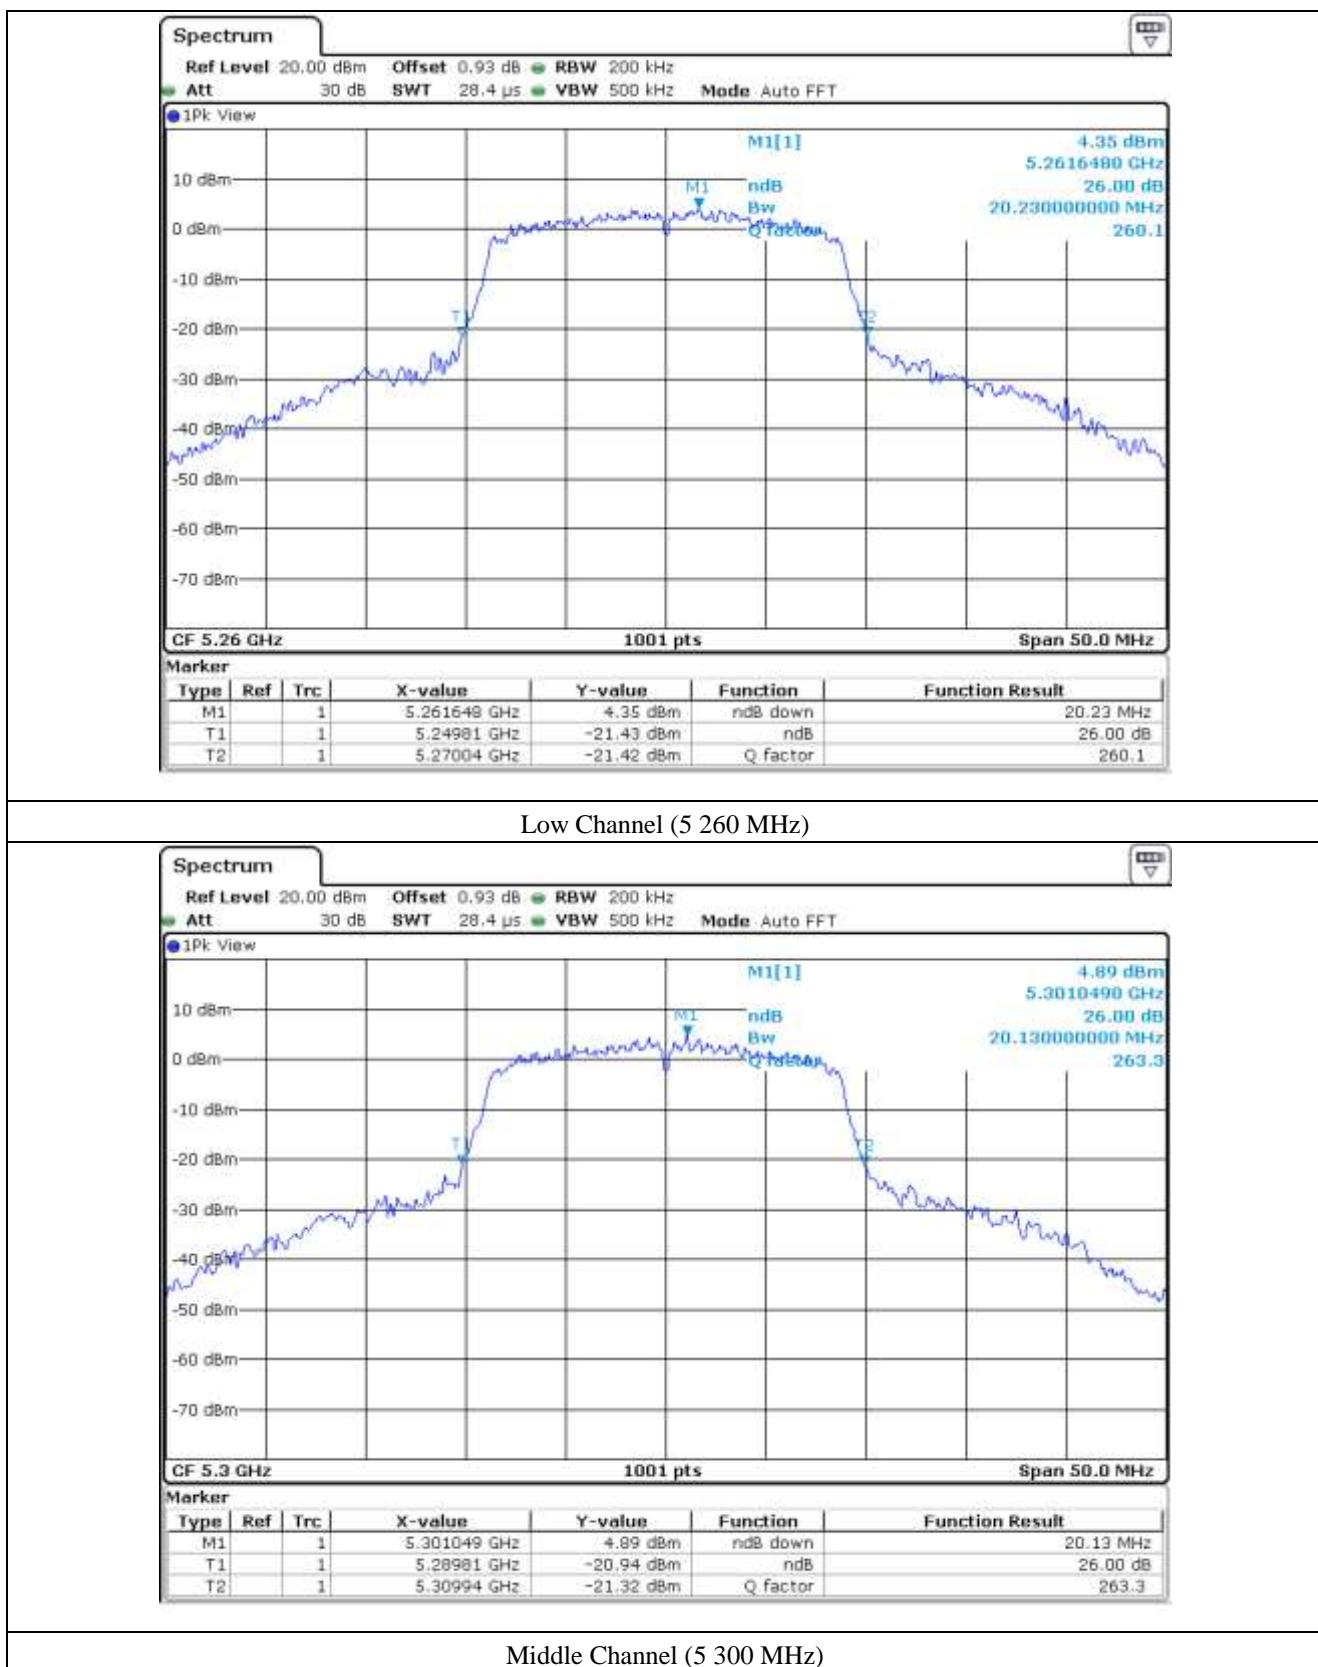


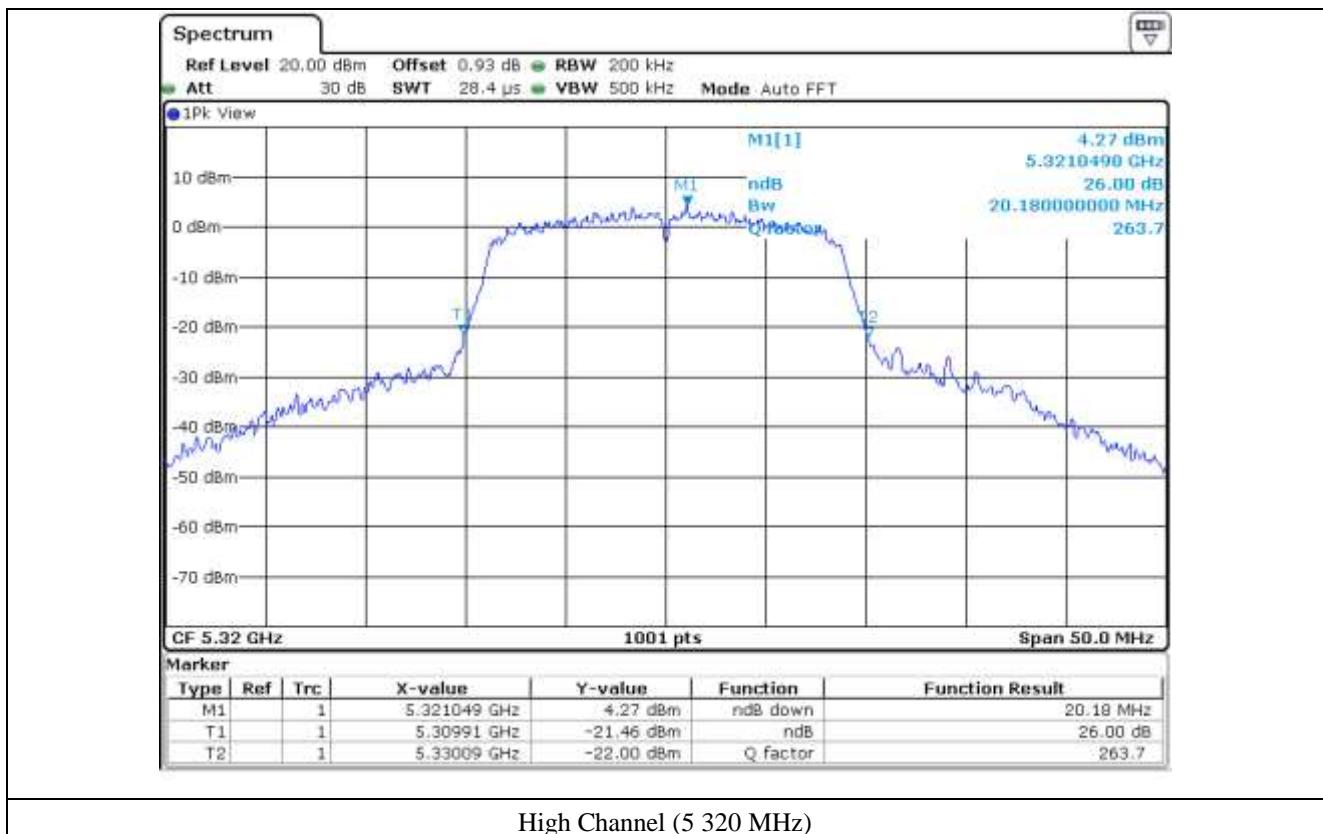

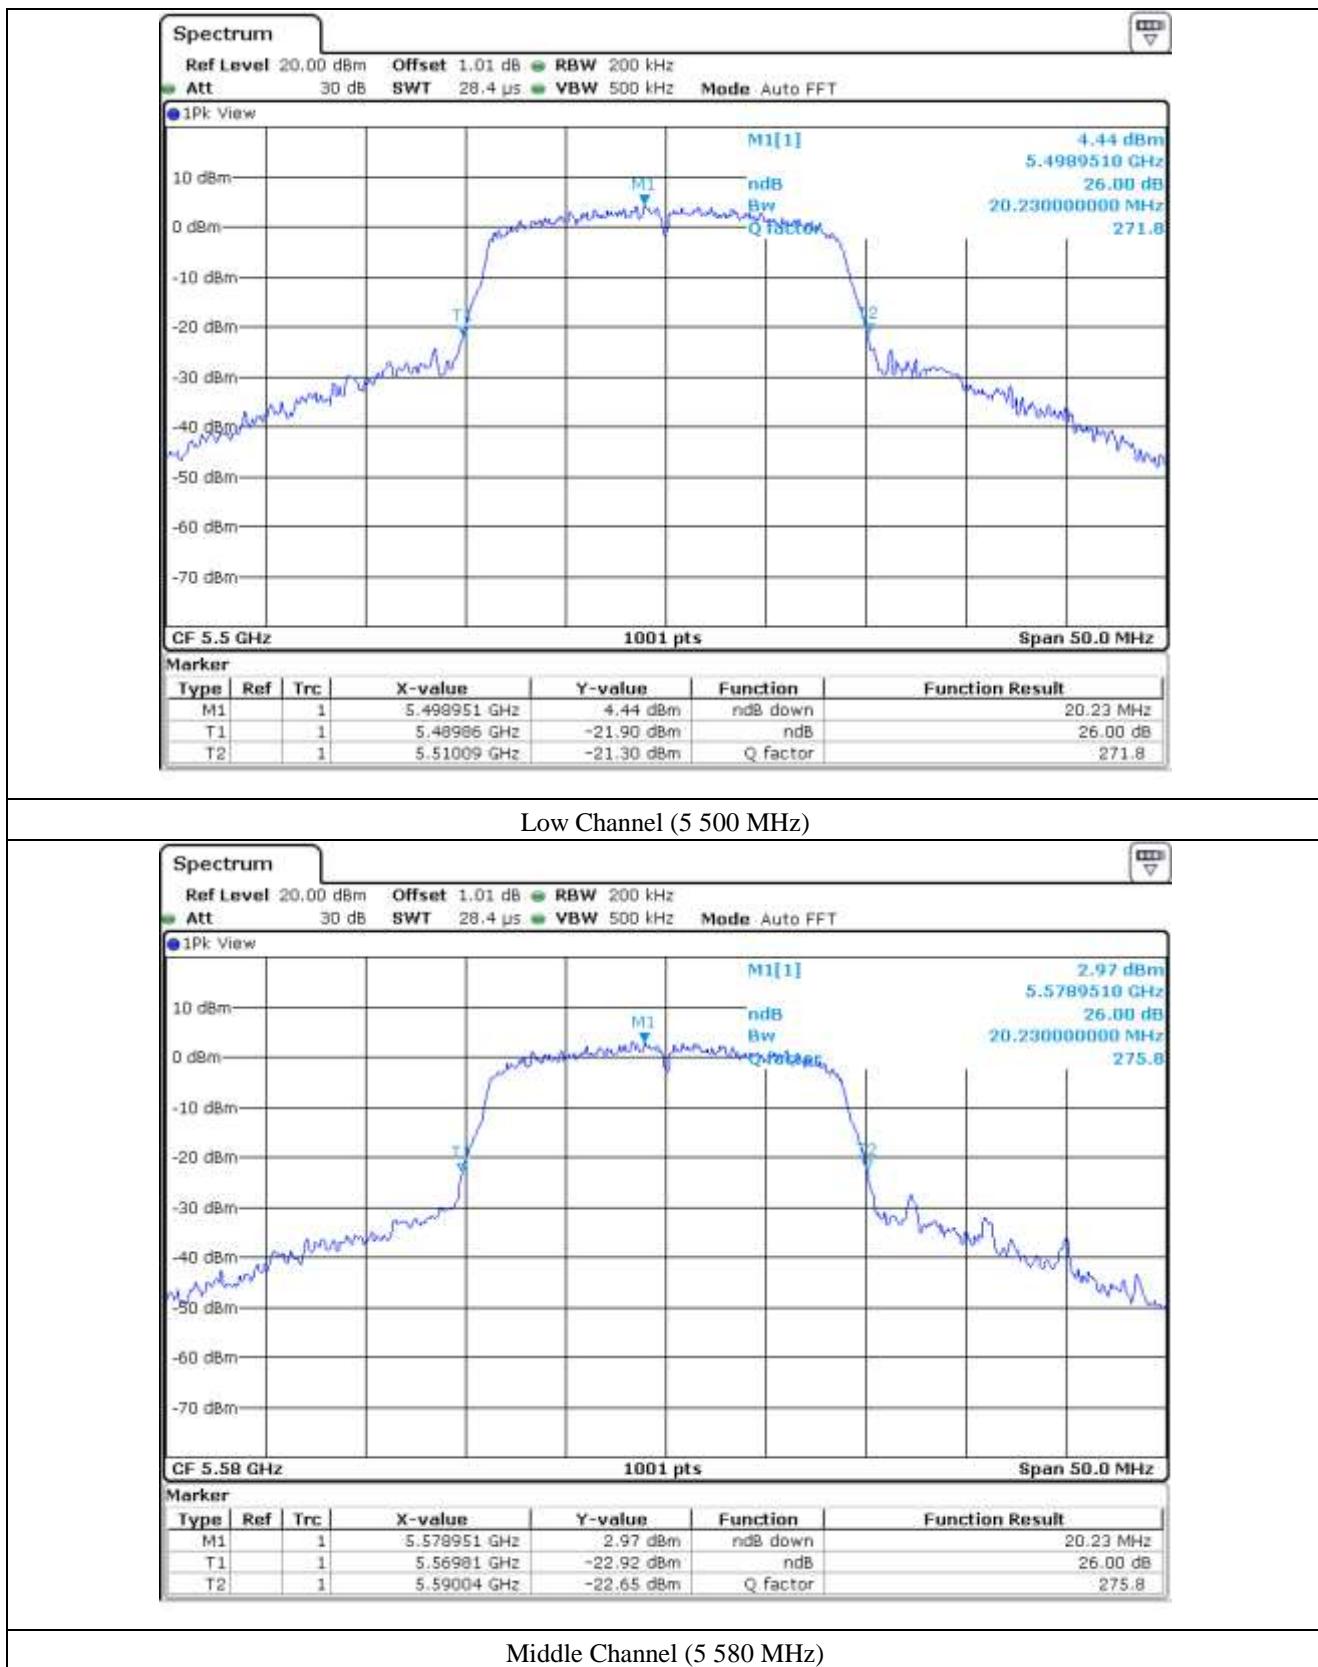

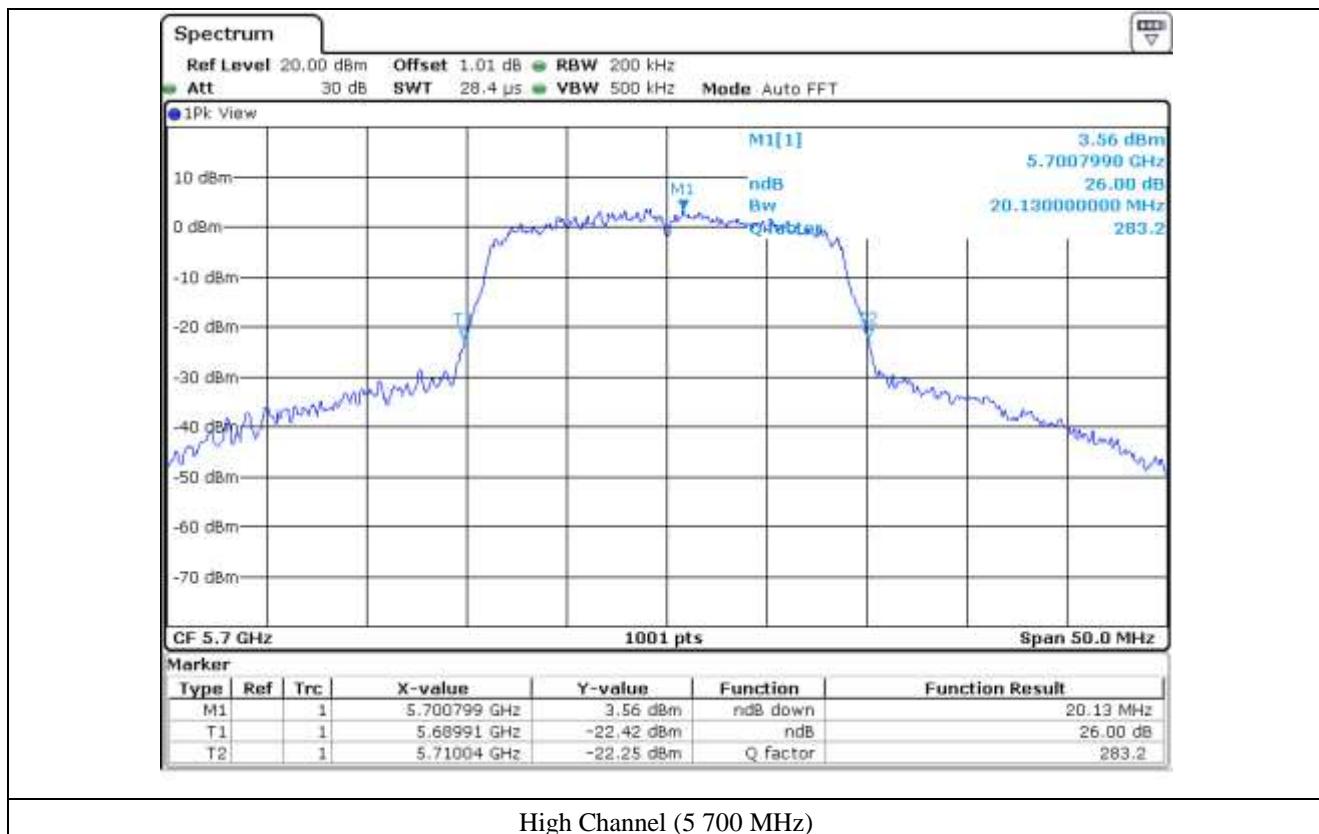

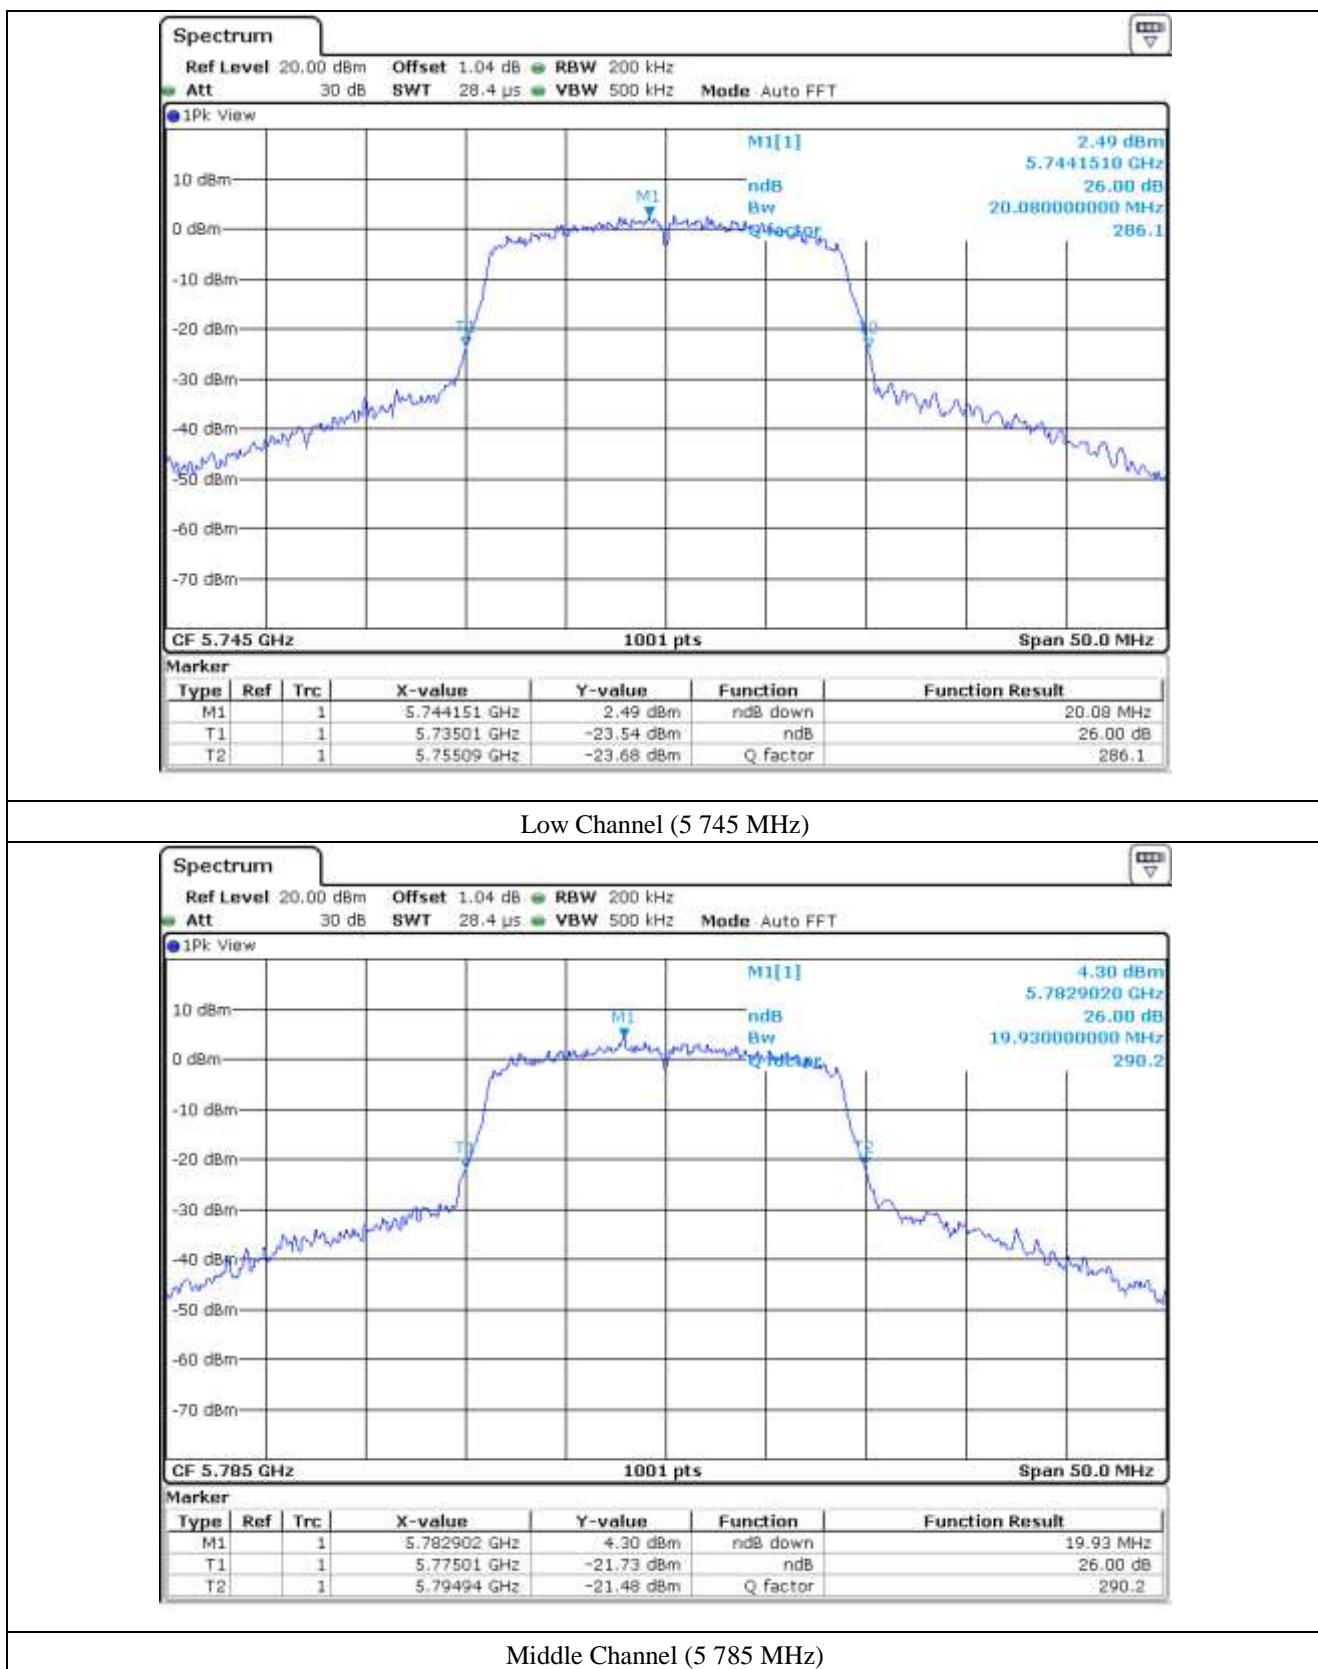

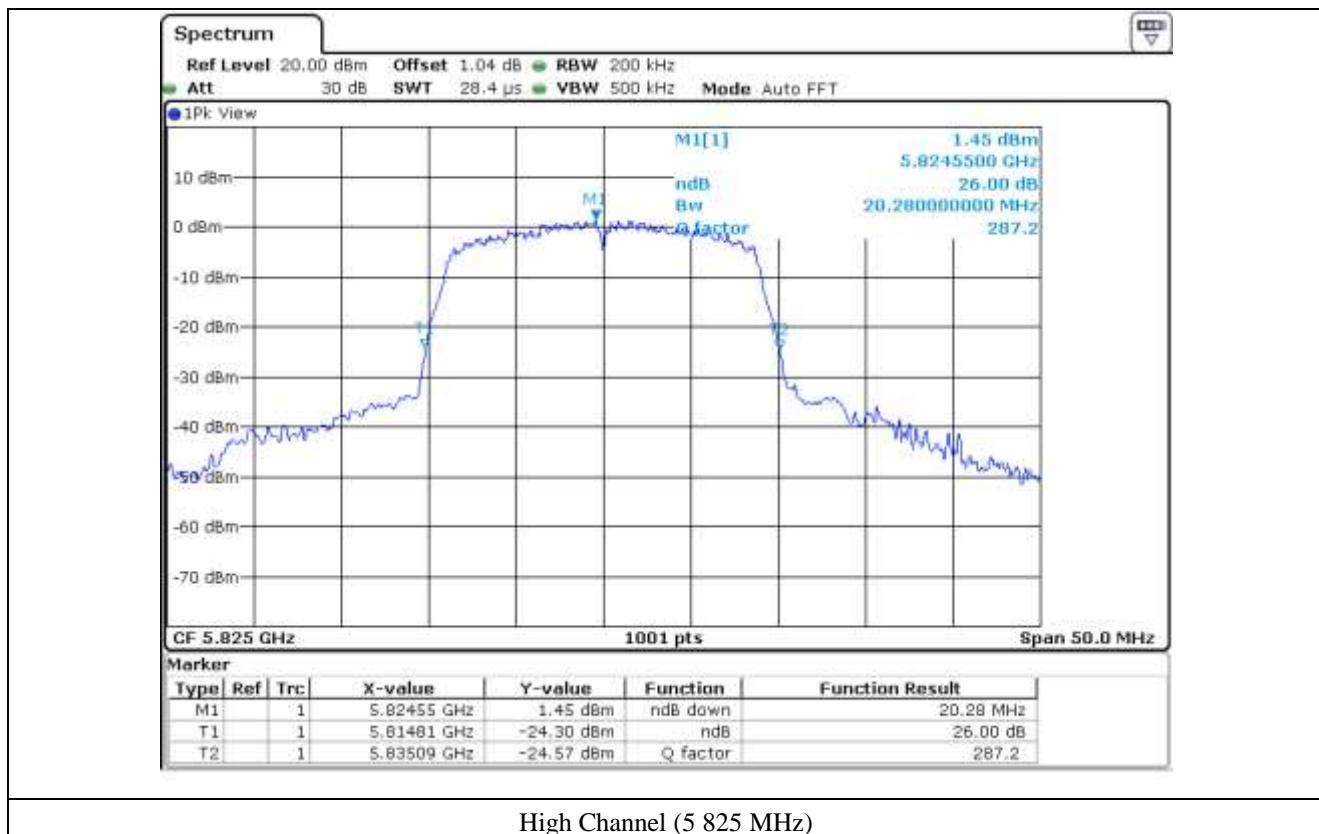



7.5.2 Test data for Antenna 1


-. Test Result : Pass


FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	26 dB Bandwidth (MHz)
5 150 ~ 5 250	Low	5 180.00	20.08
	Middle	5 220.00	20.18
	High	5 240.00	20.18
5 250 ~ 5 350	Low	5 260.00	20.23
	Middle	5 300.00	20.33
	High	5 320.00	20.78
5 470 ~ 5 725	Low	5 500.00	20.63
	Middle	5 580.00	20.73
	High	5 700.00	20.28
5 725 ~ 5 850	Low	5 745.00	20.13
	Middle	5 785.00	20.13
	High	5 825.00	20.13

Remark: See next page for measurement data.

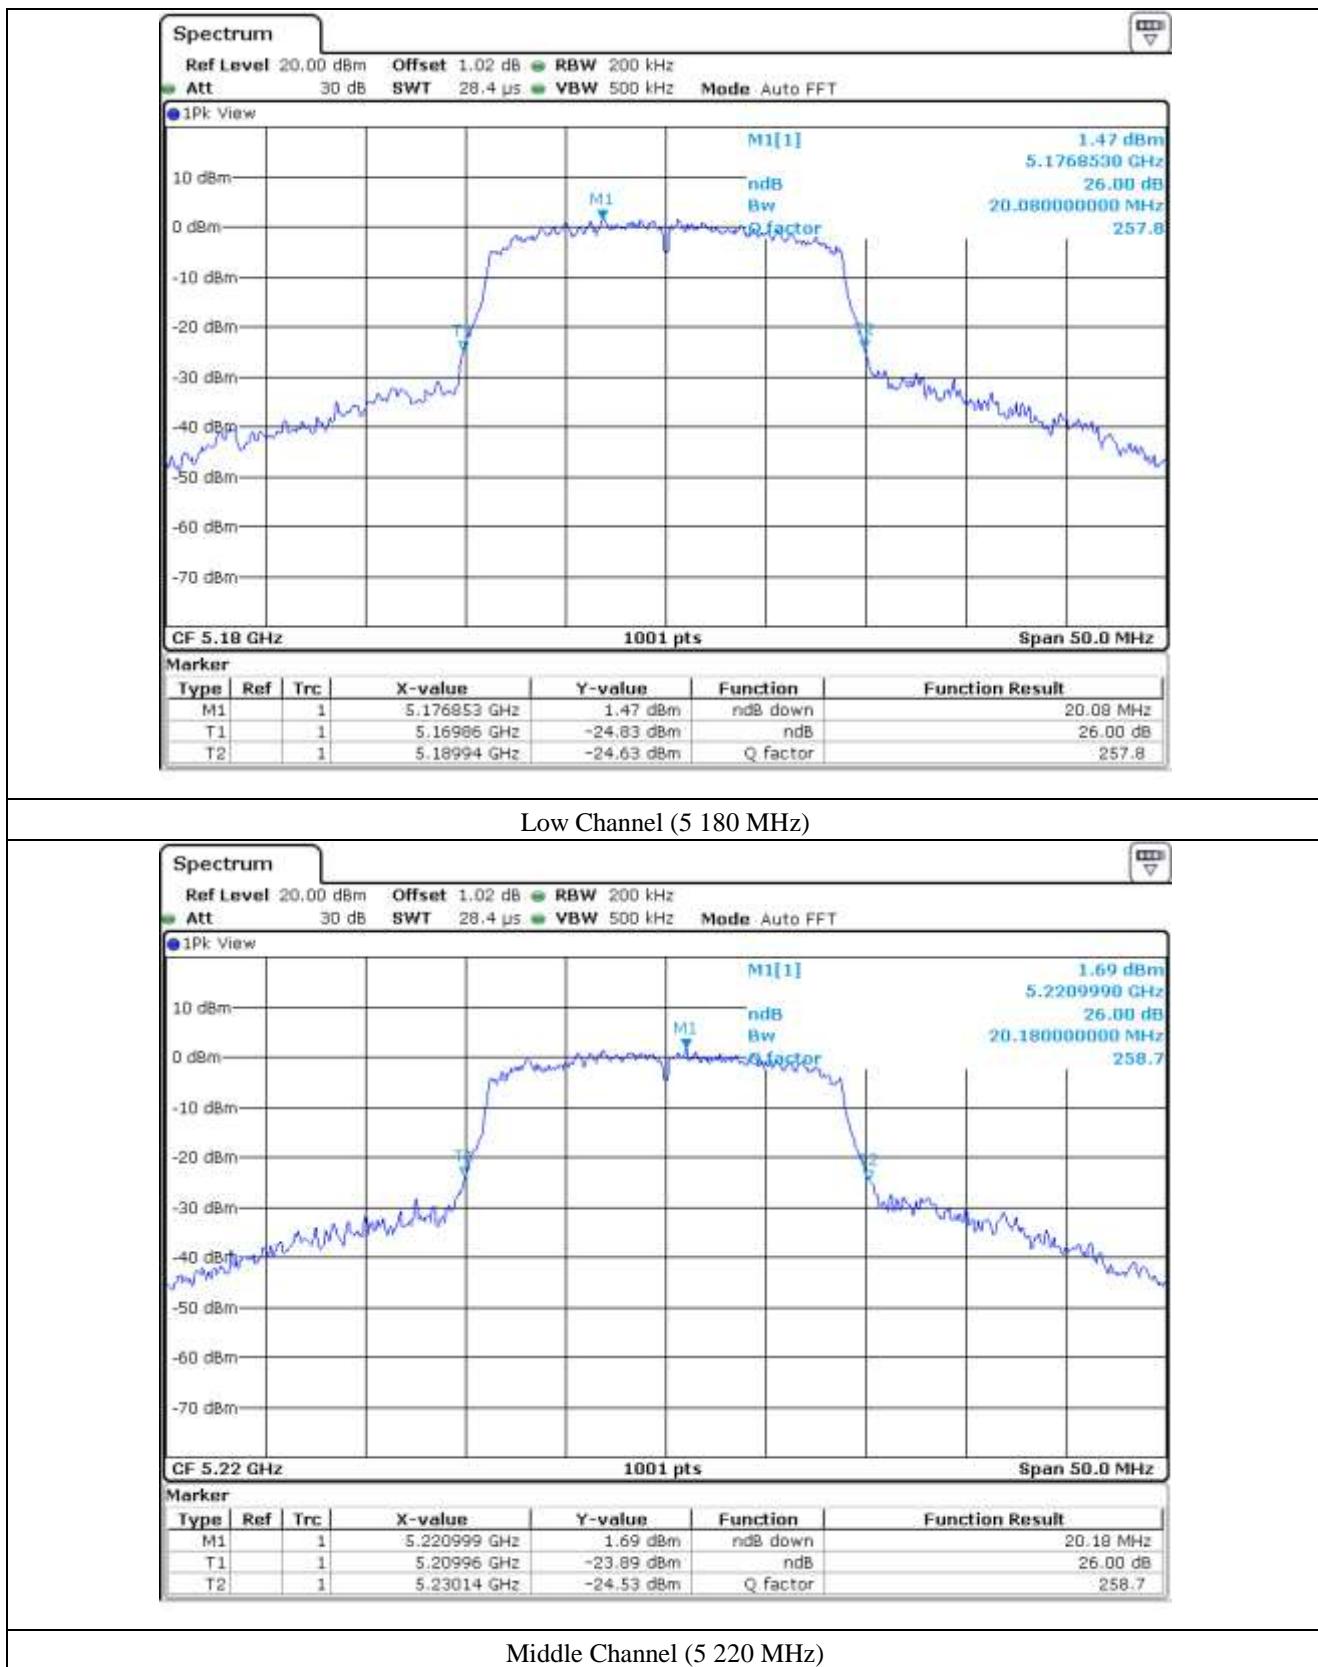


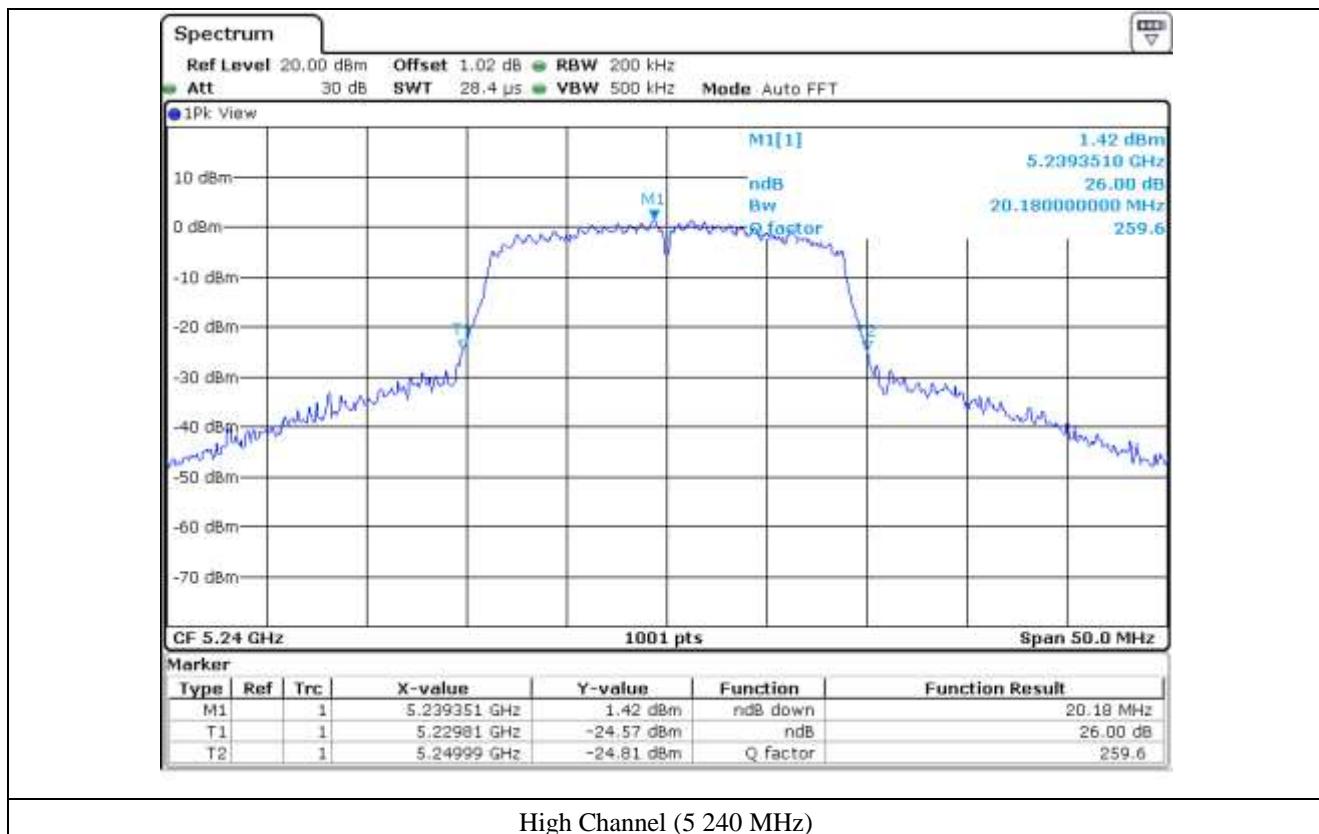


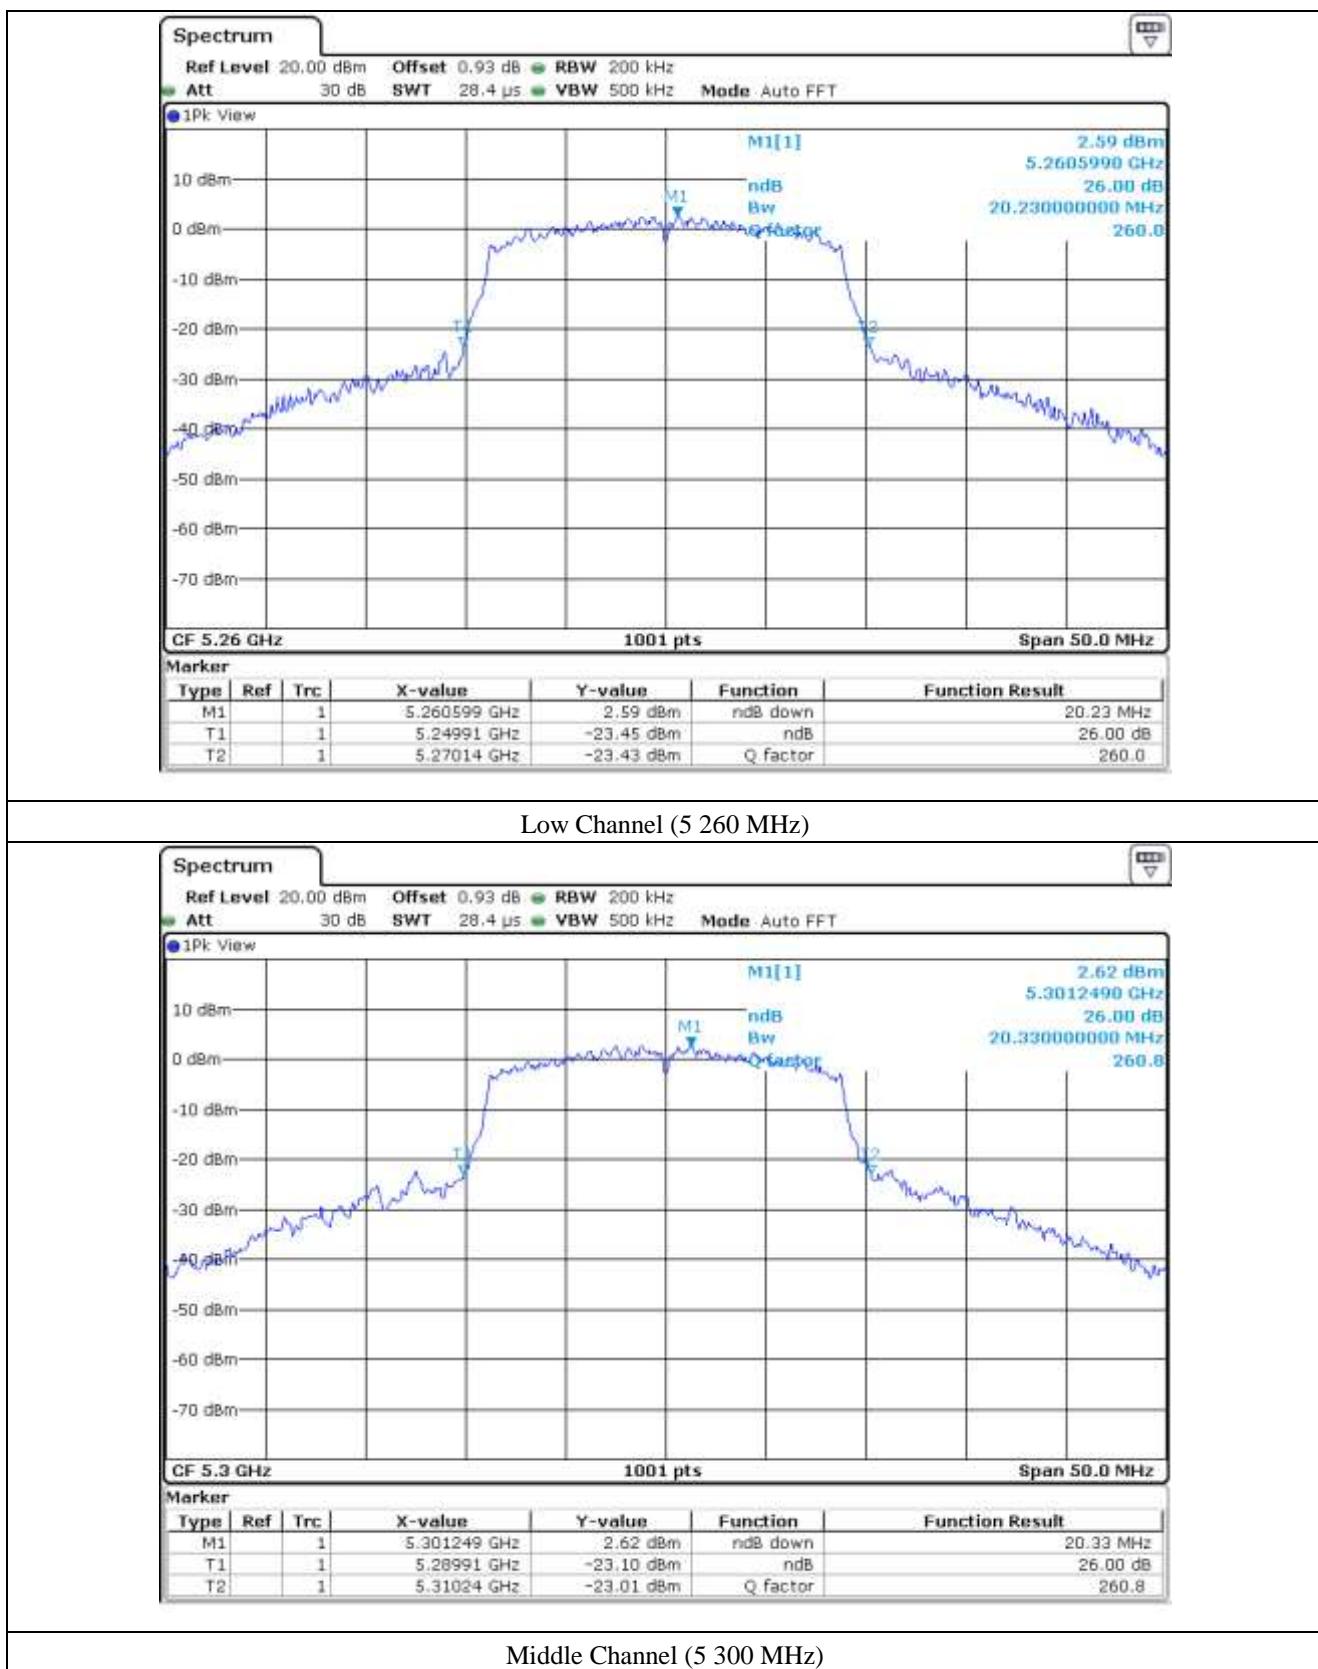


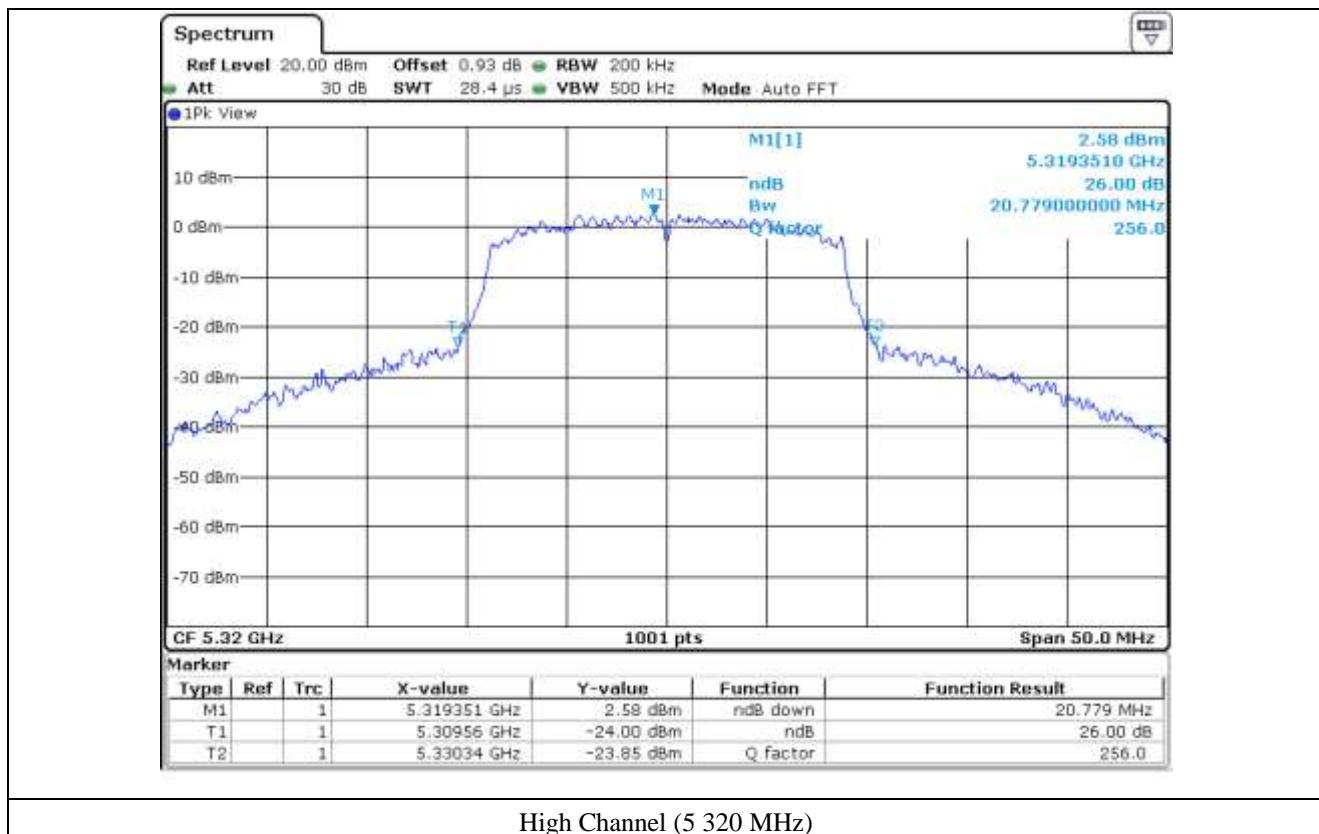



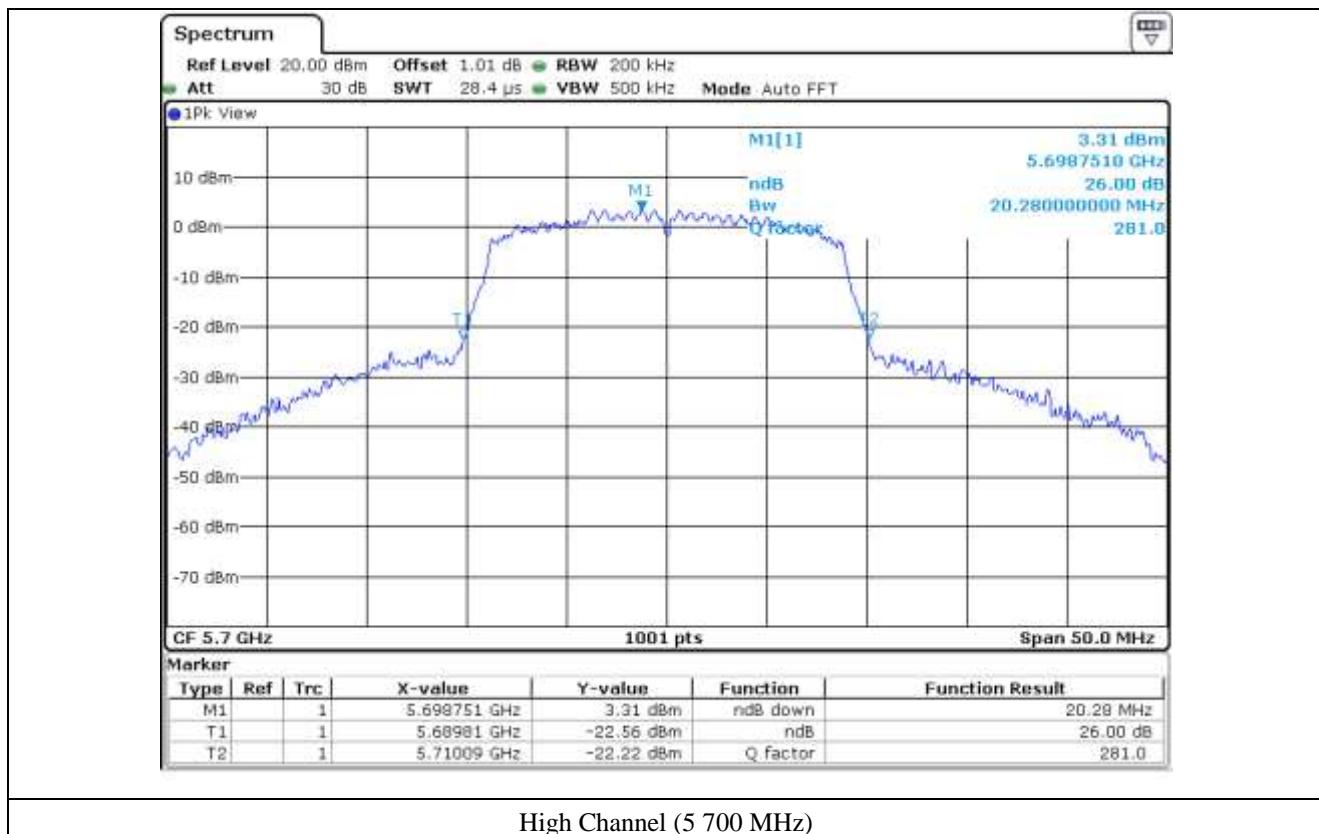

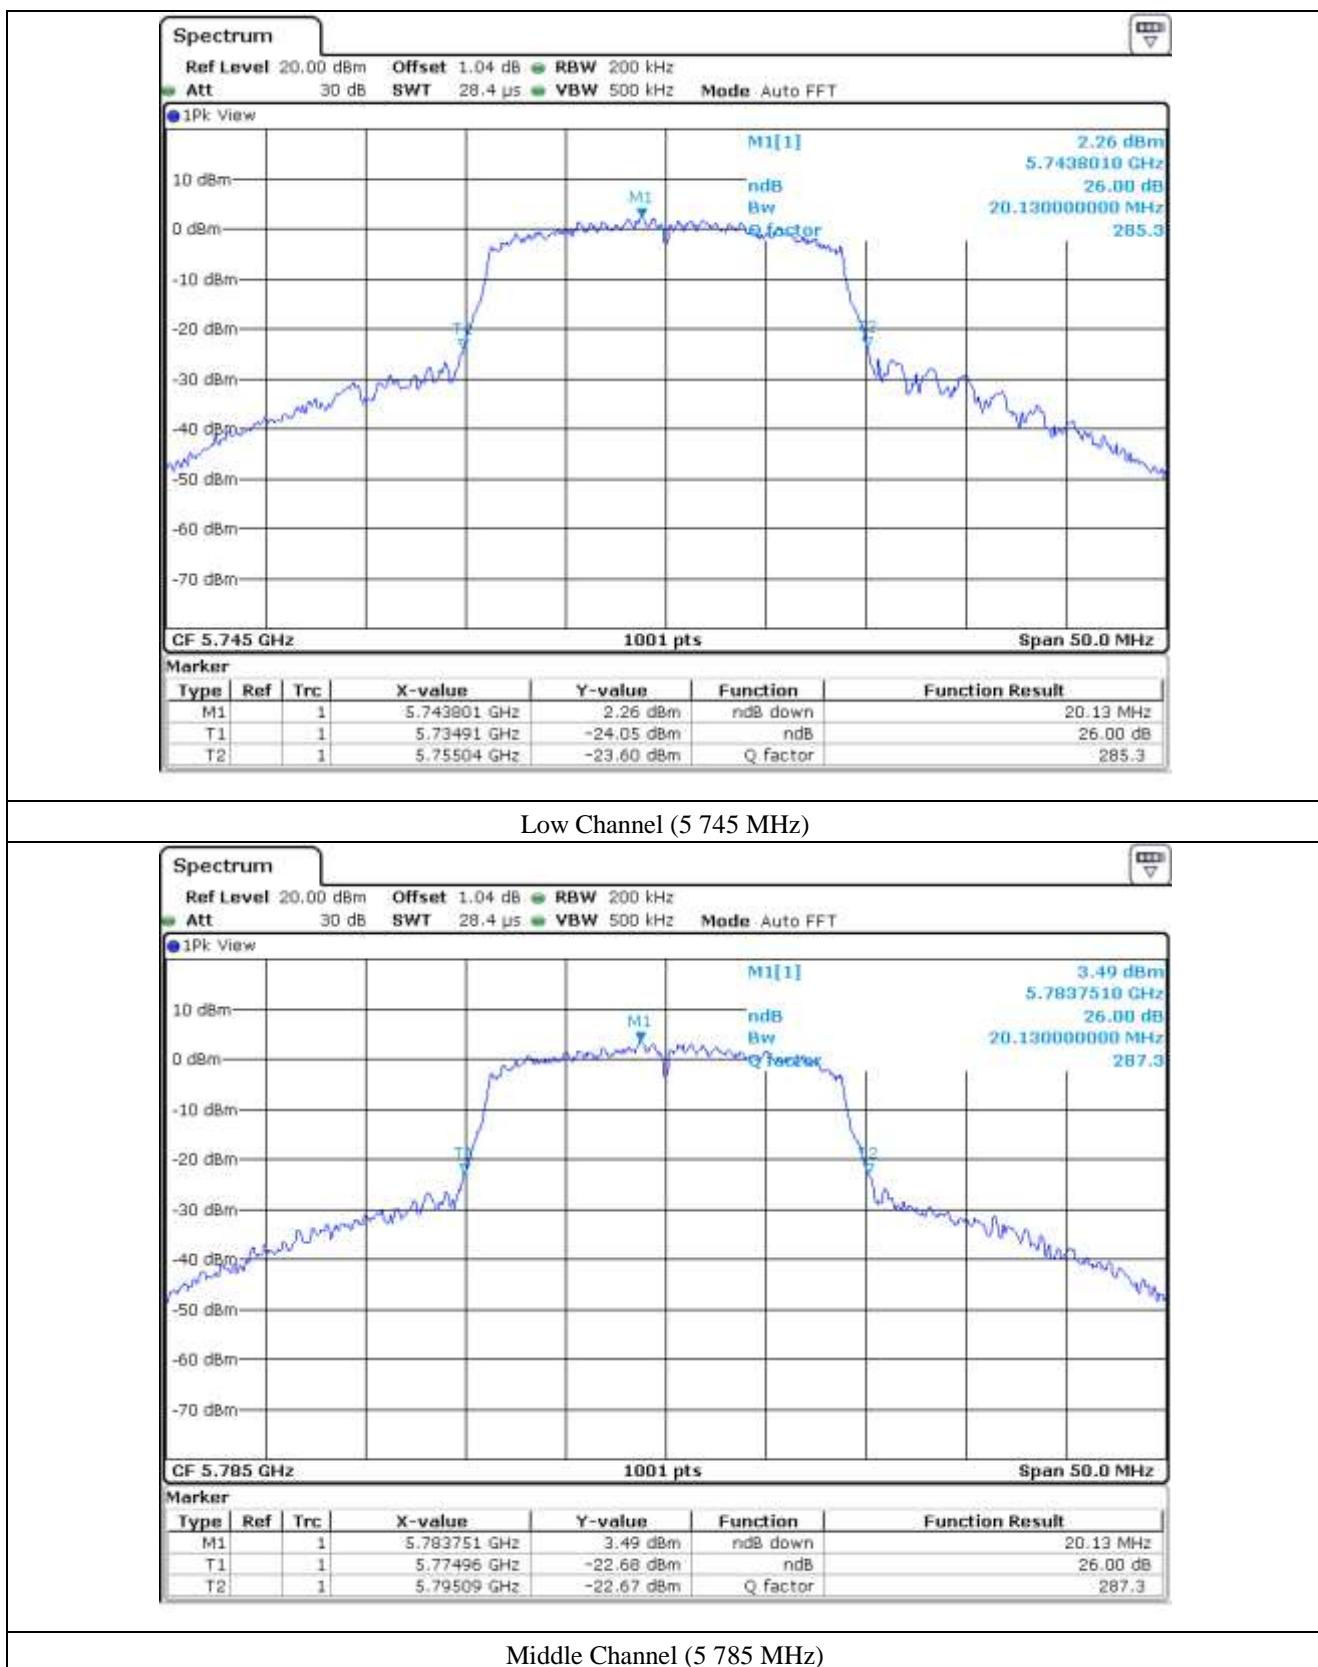


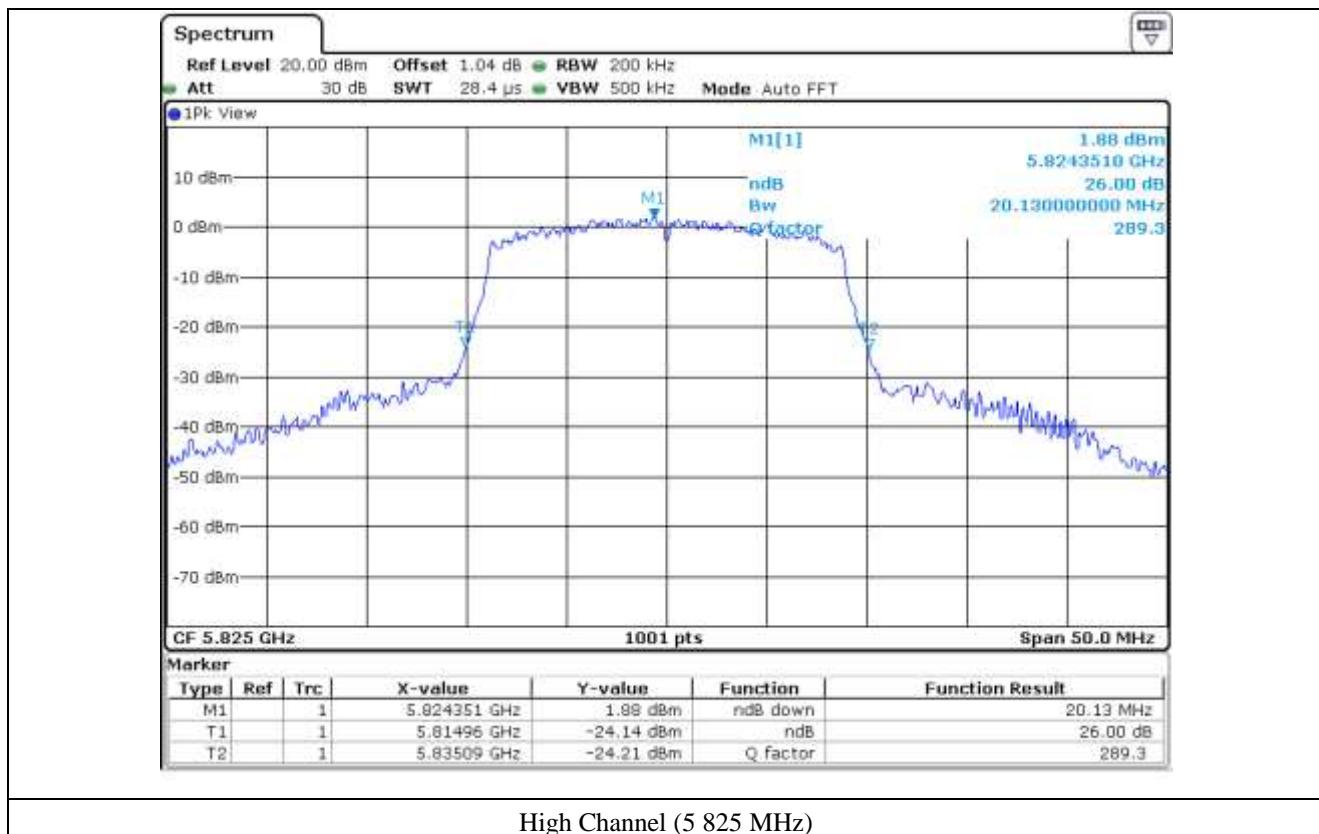

7.4.3 Test data for Staddle Channel_Antenna 0

- Test Result : Pass


FREQUENCY RANGE (MHz)	FREQUENCY (MHz)	26 dB Bandwidth (MHz)
5 470 ~ 5 725	5 720.00	14.94
5 725 ~ 5 850	5 720.00	5.09

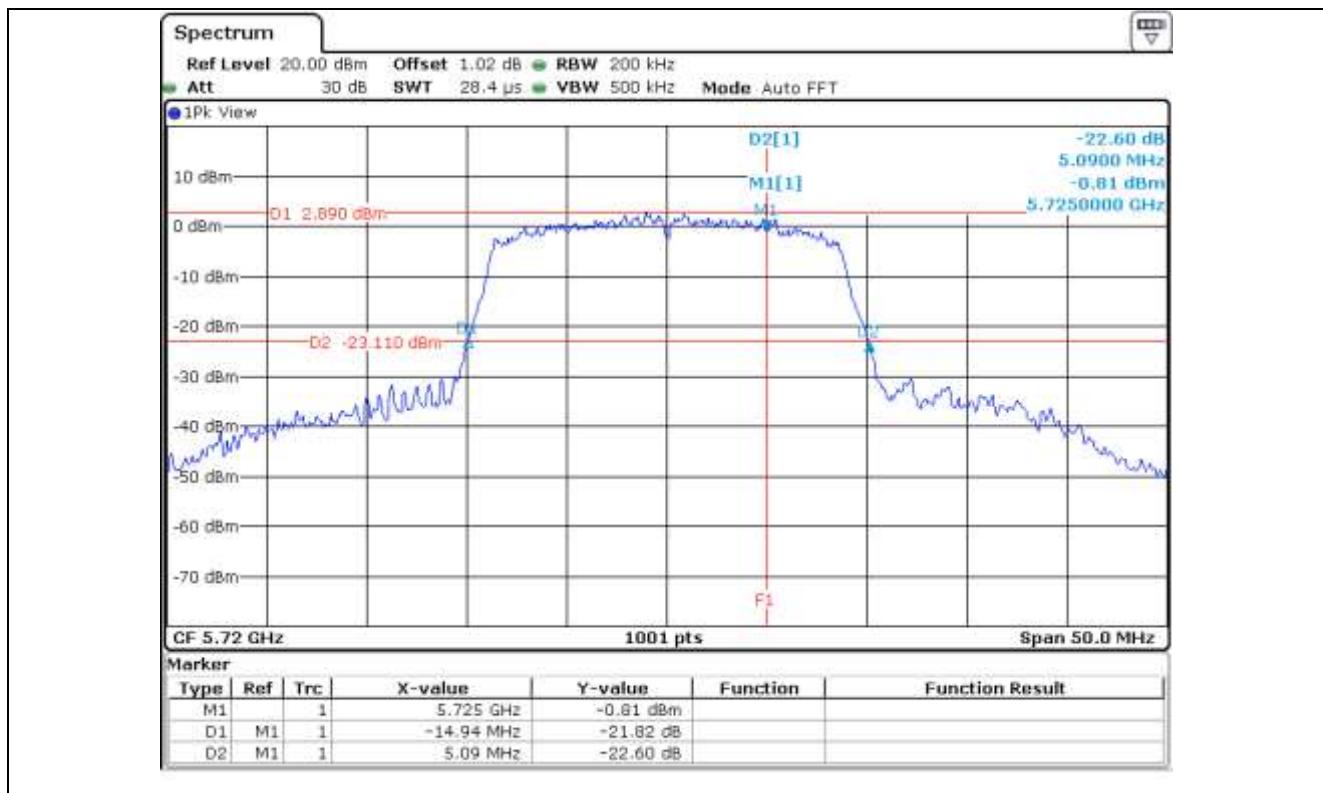

7.4.4 Test data for Staddle Channel_Antenna 1

- Test Result : Pass

FREQUENCY RANGE (MHz)	FREQUENCY (MHz)	26 dB Bandwidth (MHz)
5 470 ~ 5 725	5 720.00	15.09
5 725 ~ 5 850	5 720.00	5.19

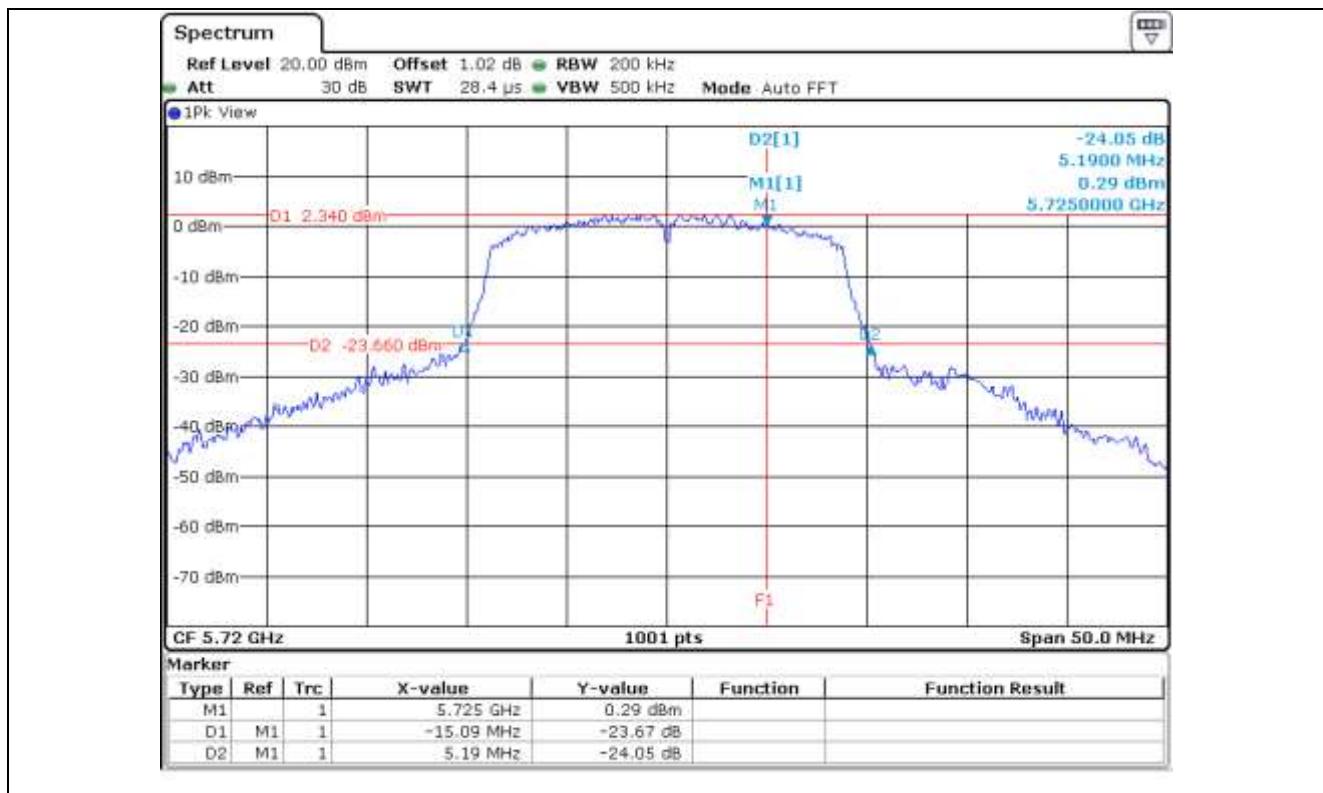


7.6 Test data for 802.11n_HT40 RLAN Mode

7.6.1 Test data for Antenna 0



- Test Result : Pass


FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	26 dB Bandwidth (MHz)
5 150 ~ 5 250	Low	5 190.00	40.86
	High	5 230.00	40.86
5 250 ~ 5 350	Low	5 270.00	40.26
	High	5 310.00	41.06
5 470 ~ 5 725	Low	5 510.00	40.36
	Middle	5 550.00	40.96
	High	5 670.00	40.66
5 725 ~ 5 850	Low	5 755.00	40.36
	High	5 795.00	40.96


Remark: See next page for measurement data.

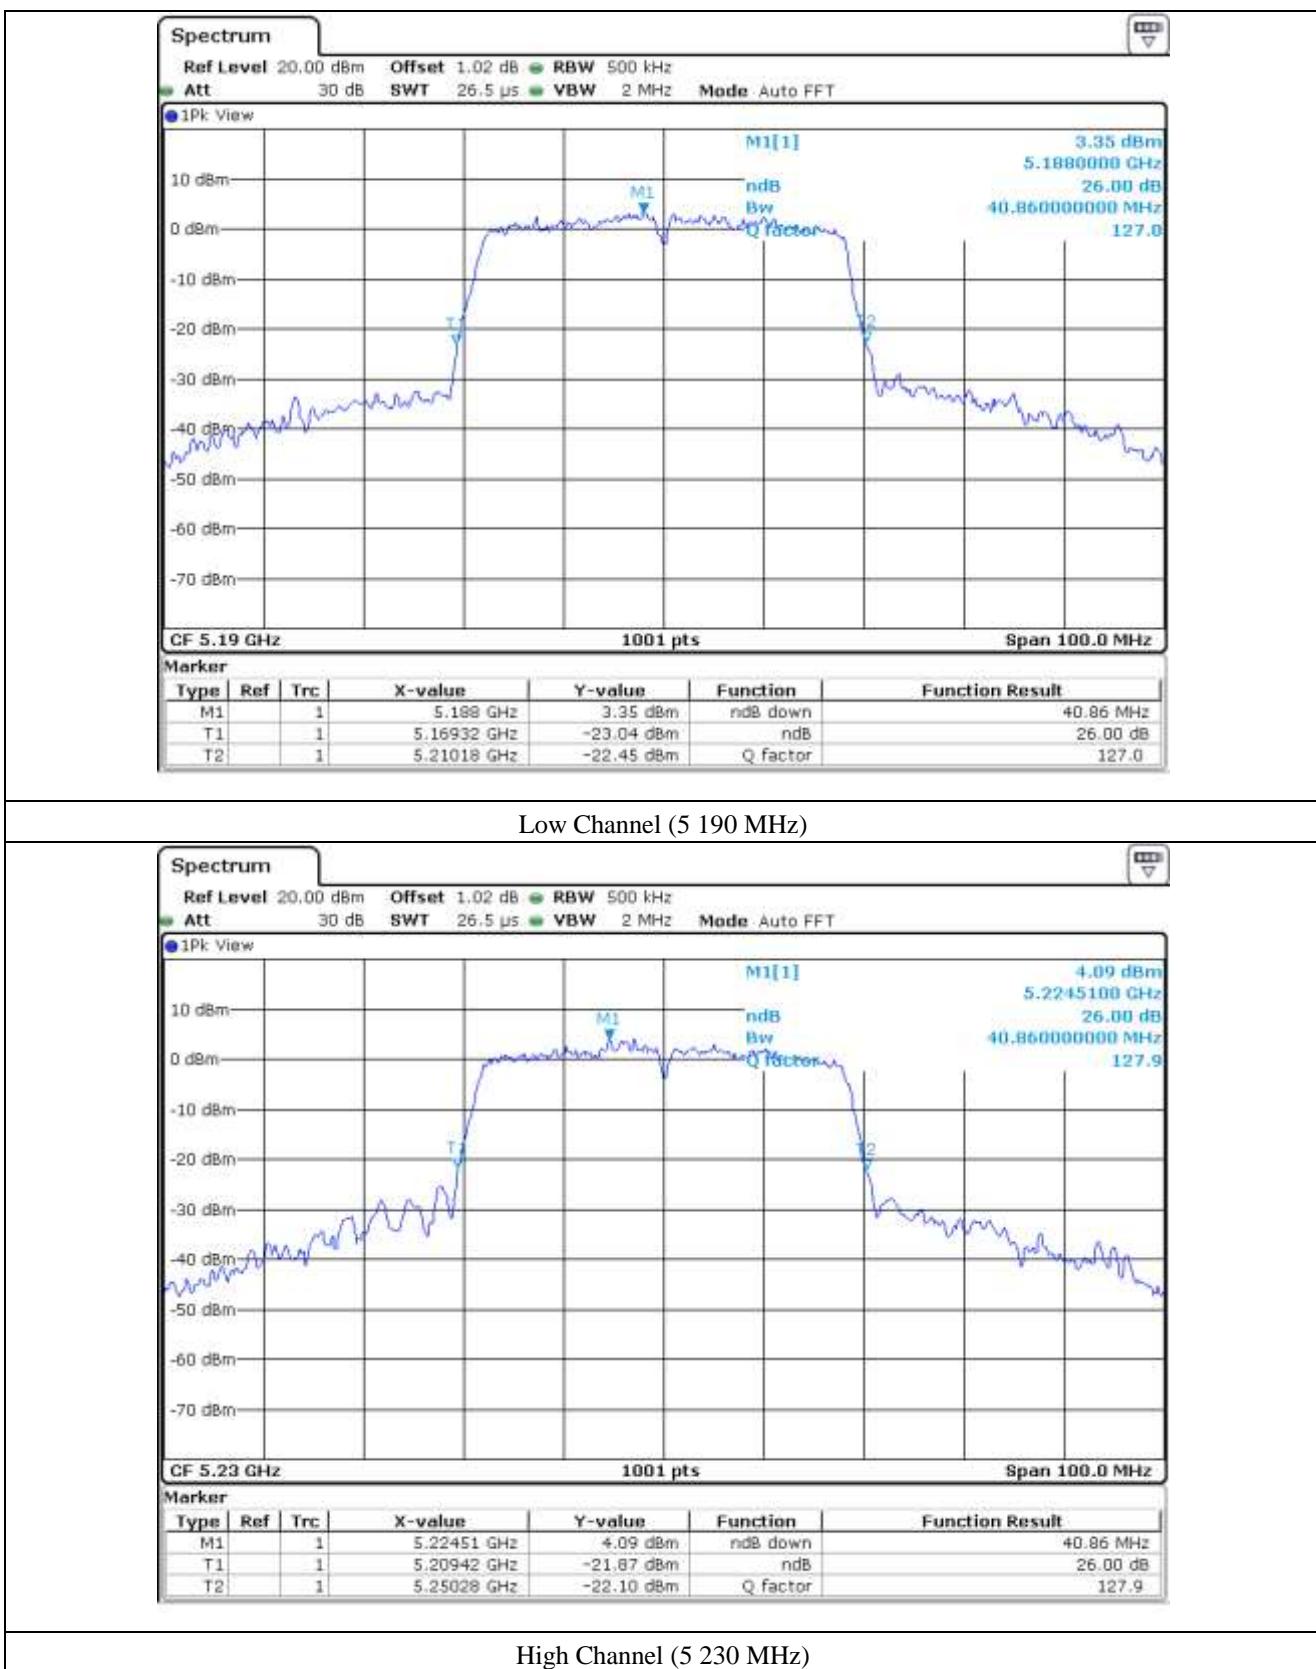

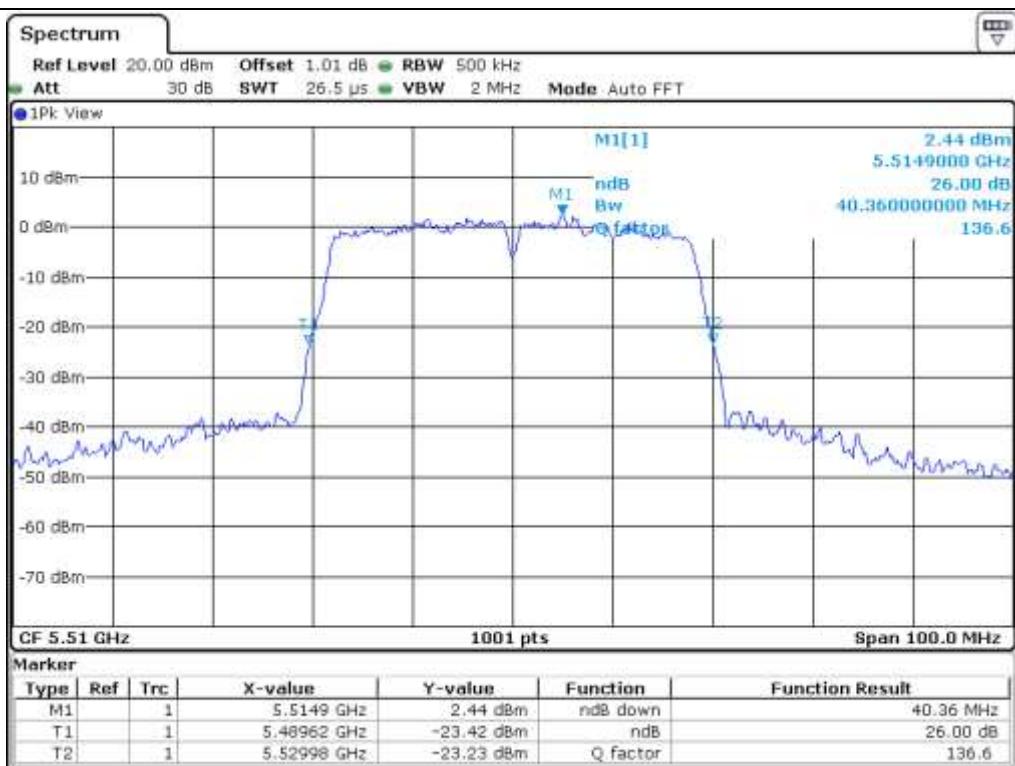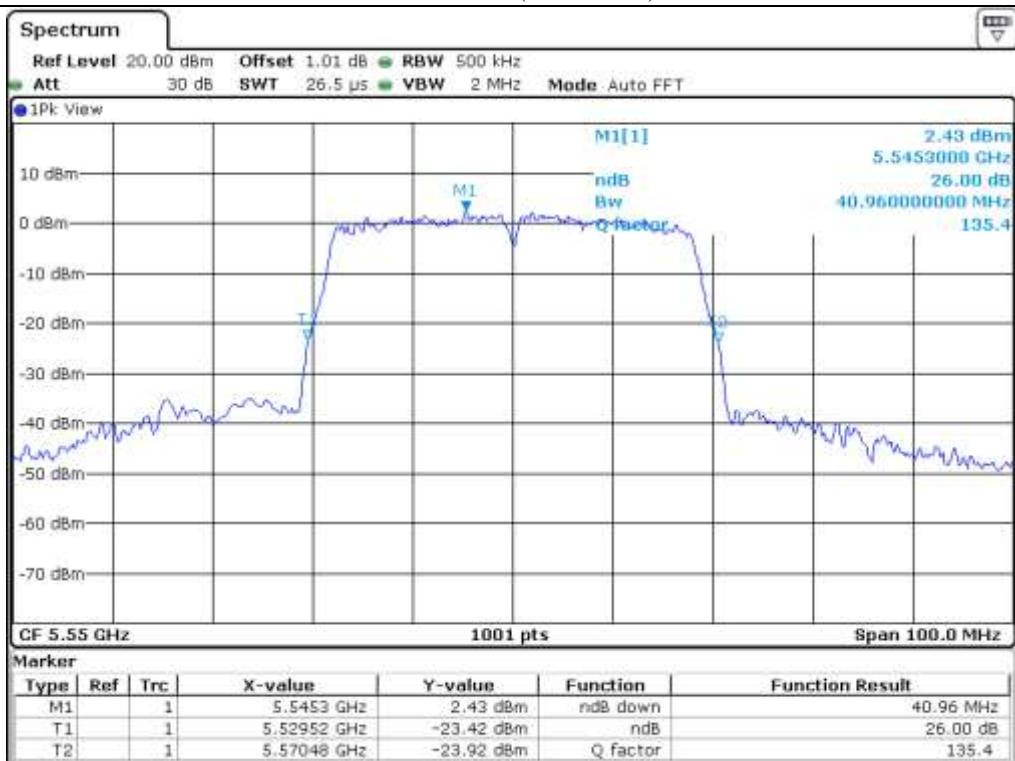

**Low Channel (5 510 MHz)****Middle Channel (5 550 MHz)**

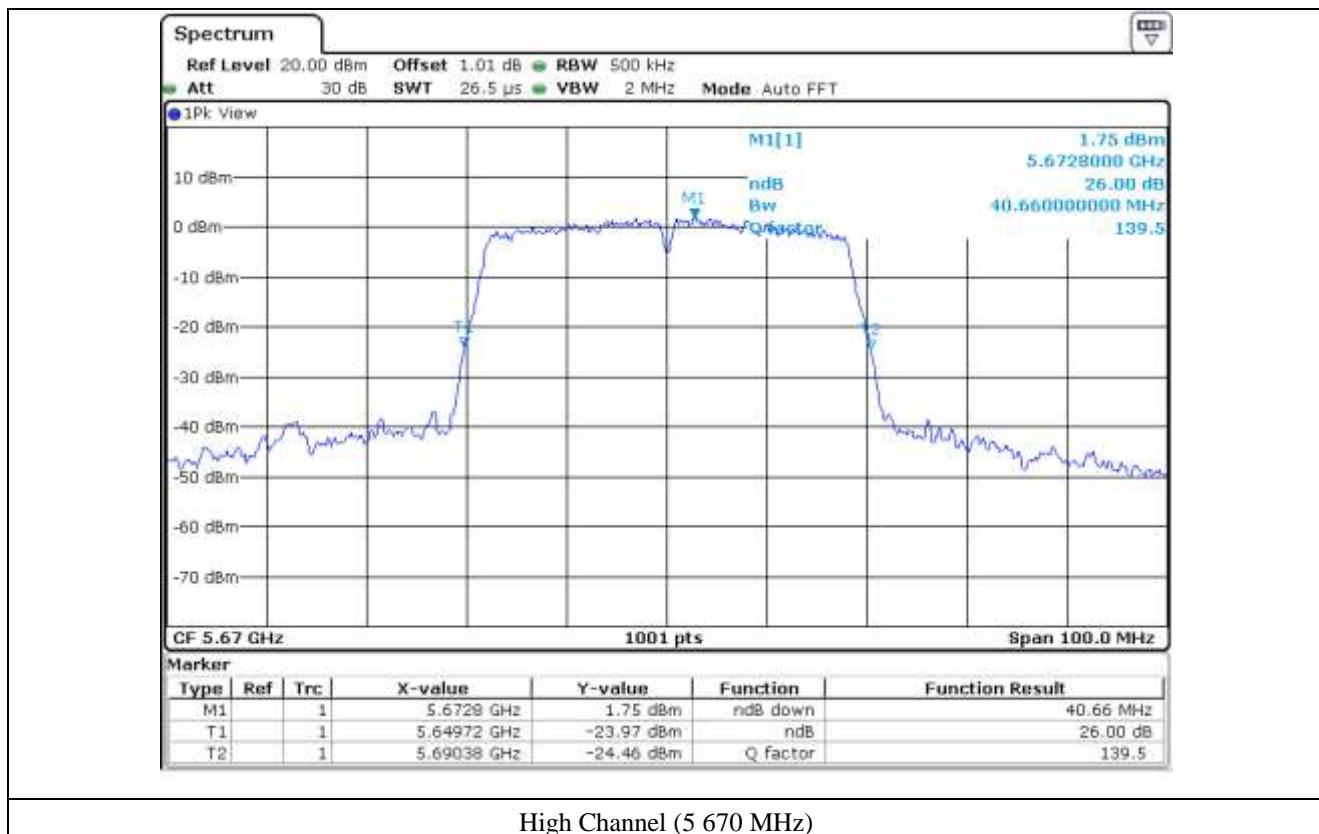

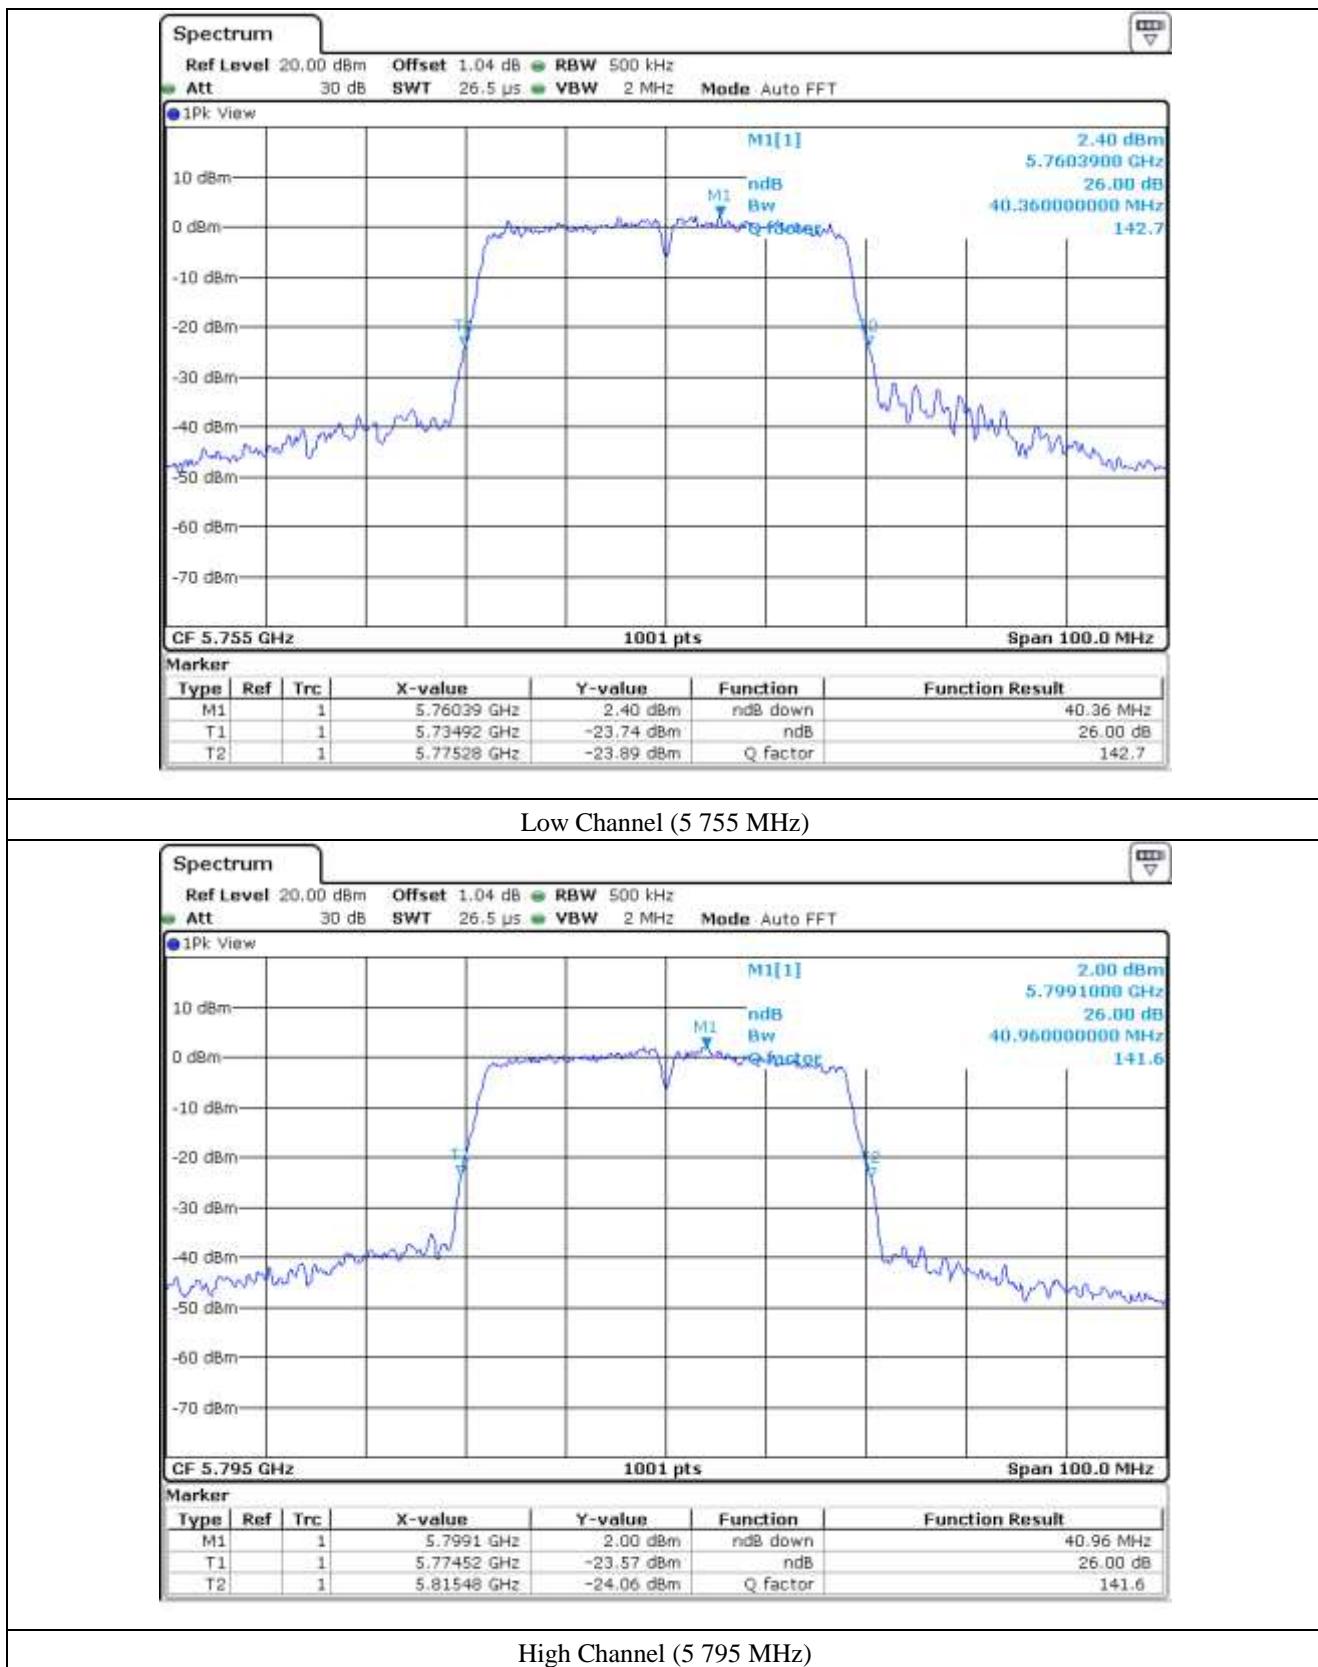


7.6.2 Test data for Antenna 1

-. Test Result : Pass


FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	26 dB Bandwidth (MHz)
5 150 ~ 5 250	Low	5 190.00	40.06
	High	5 230.00	40.46
5 250 ~ 5 350	Low	5 270.00	40.46
	High	5 310.00	40.16
5 470 ~ 5 725	Low	5 510.00	40.16
	Middle	5 550.00	39.66
	High	5 670.00	40.06
5 725 ~ 5 850	Low	5 755.00	40.36
	High	5 795.00	39.76

Remark: See next page for measurement data.

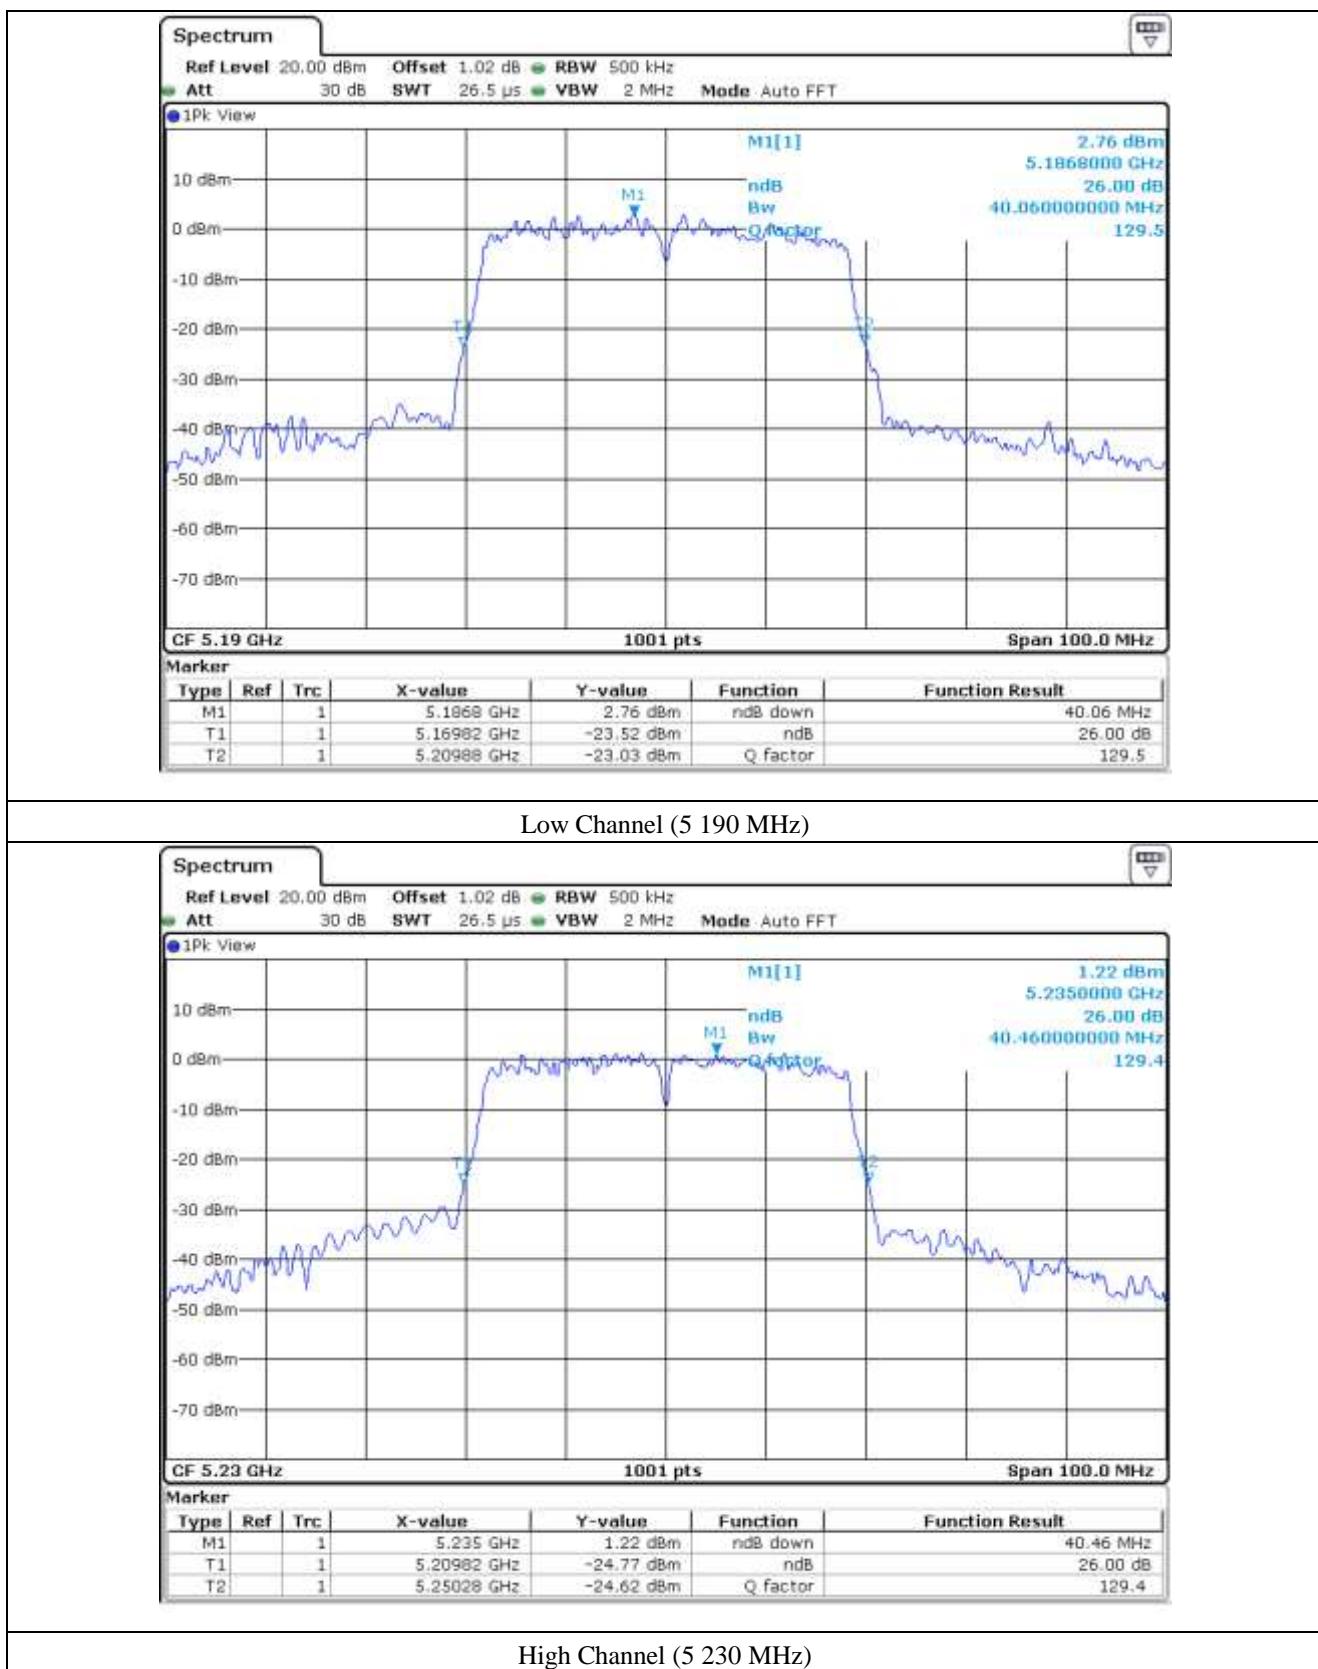





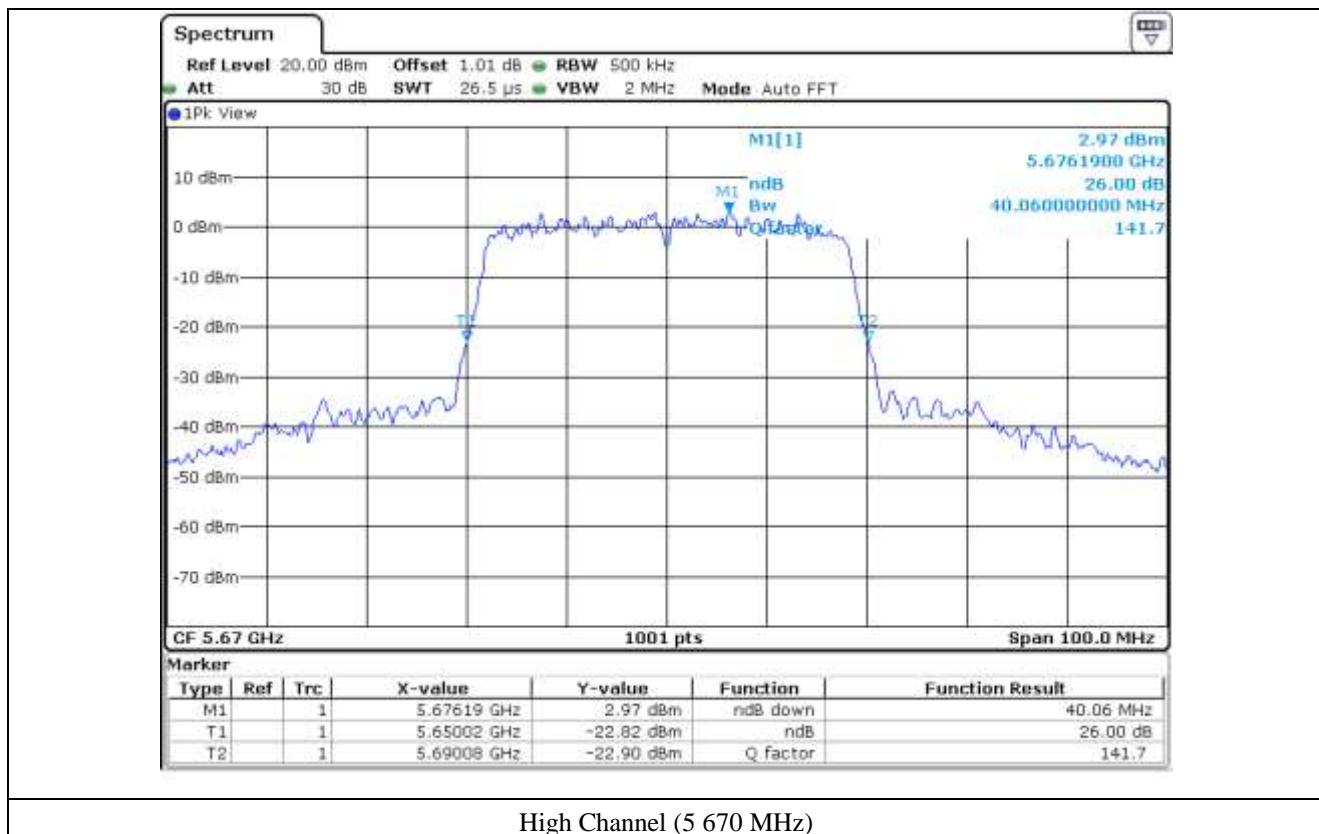




7.6.3 Test data for Staddle Channel_Antenna 0

- Test Result : Pass


FREQUENCY RANGE (MHz)	FREQUENCY (MHz)	26 dB Bandwidth (MHz)
5 470 ~ 5 725	5 710.00	35.48
5 725 ~ 5 850	5 710.00	4.78

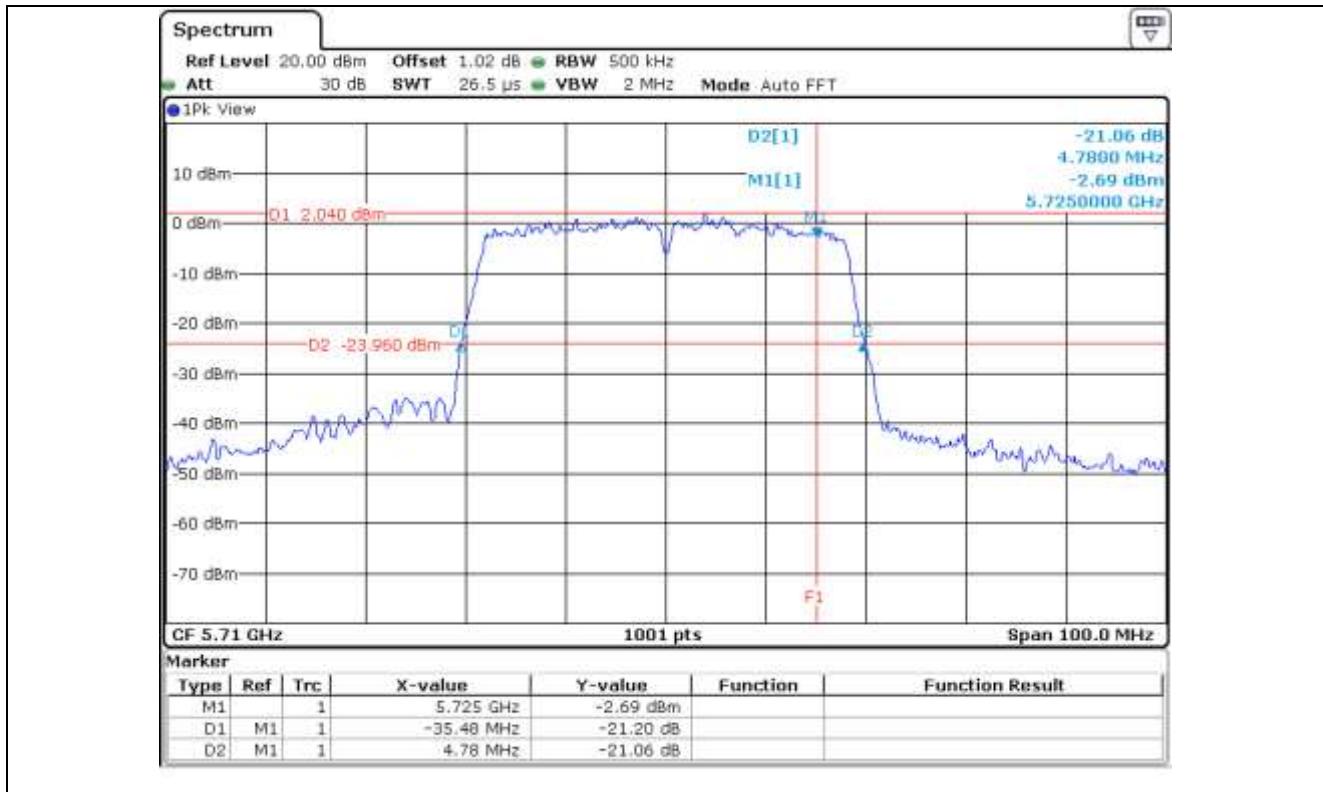

7.6.4 Test data for Staddle Channel_Antenna 1

- Test Result : Pass

FREQUENCY RANGE (MHz)	FREQUENCY (MHz)	26 dB Bandwidth (MHz)
5 470 ~ 5 725	5 710.00	35.38
5 725 ~ 5 850	5 710.00	4.98

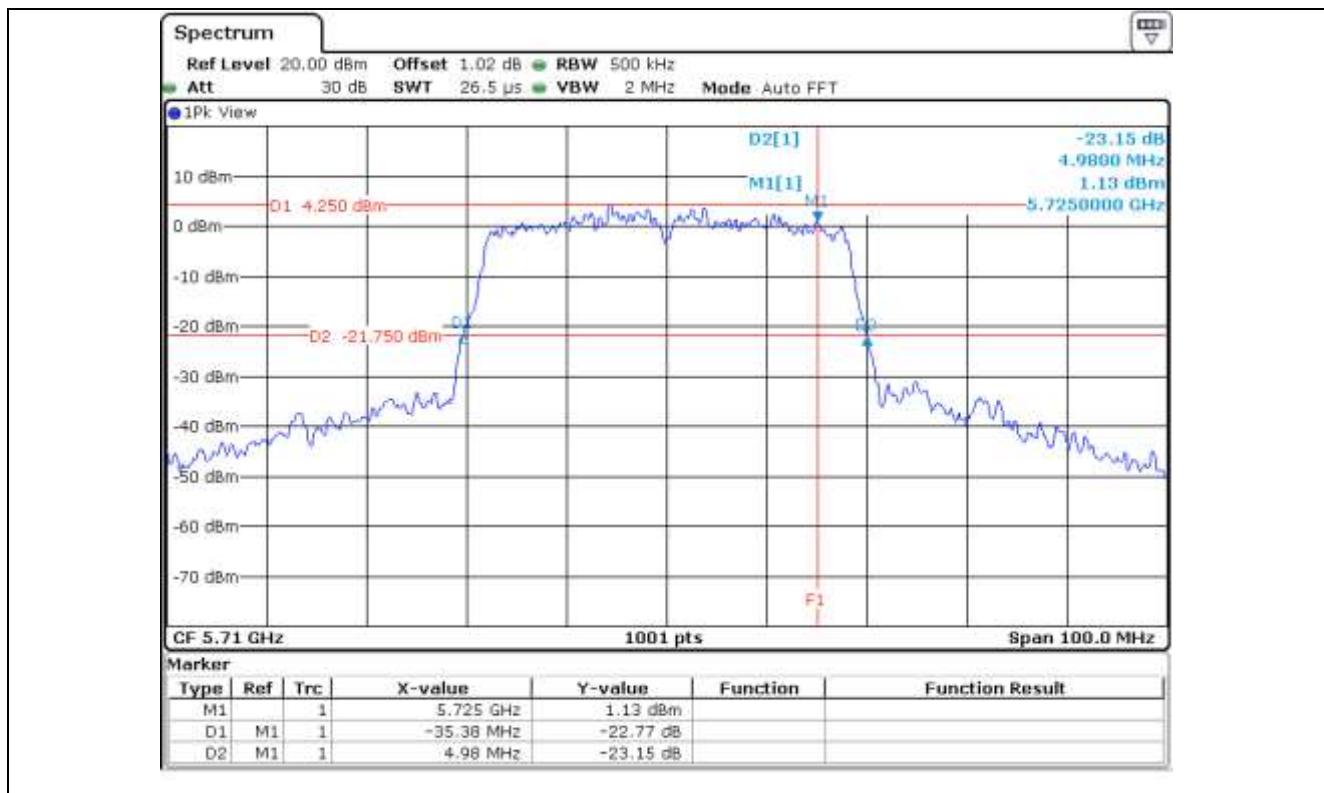


7.7 Test data for 802.11ac_VHT80 RLAN Mode


7.7.1 Test data for Antenna 0

- Test Result : Pass

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	26 dB Bandwidth (MHz)
5 150 ~ 5 250	Middle	5 210.00	80.72
5 250 ~ 5 350	Middle	5 290.00	81.52
5 470 ~ 5 725	Middle	5 530.00	80.72
5 725 ~ 5 850	Middle	5 775.00	80.32

Remark: See next page for measurement data.

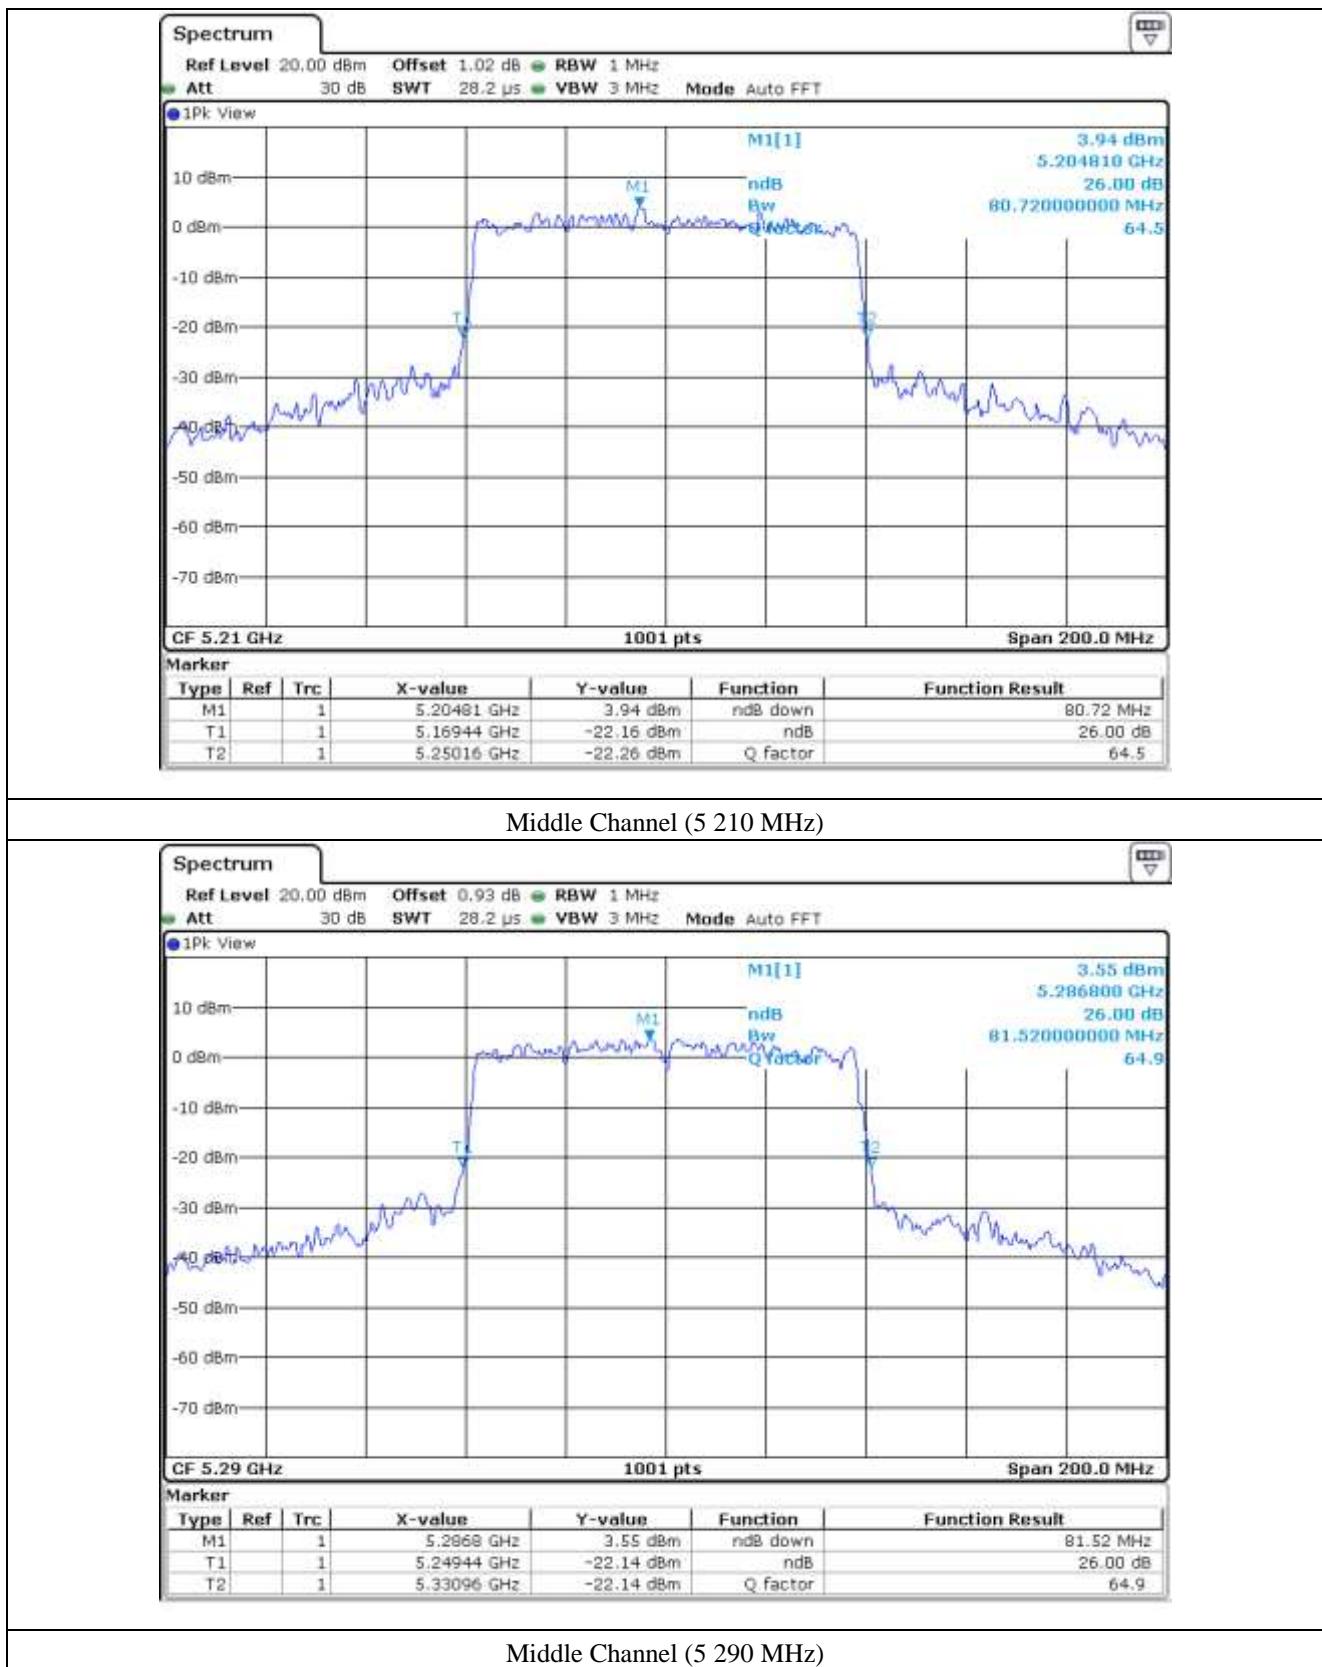

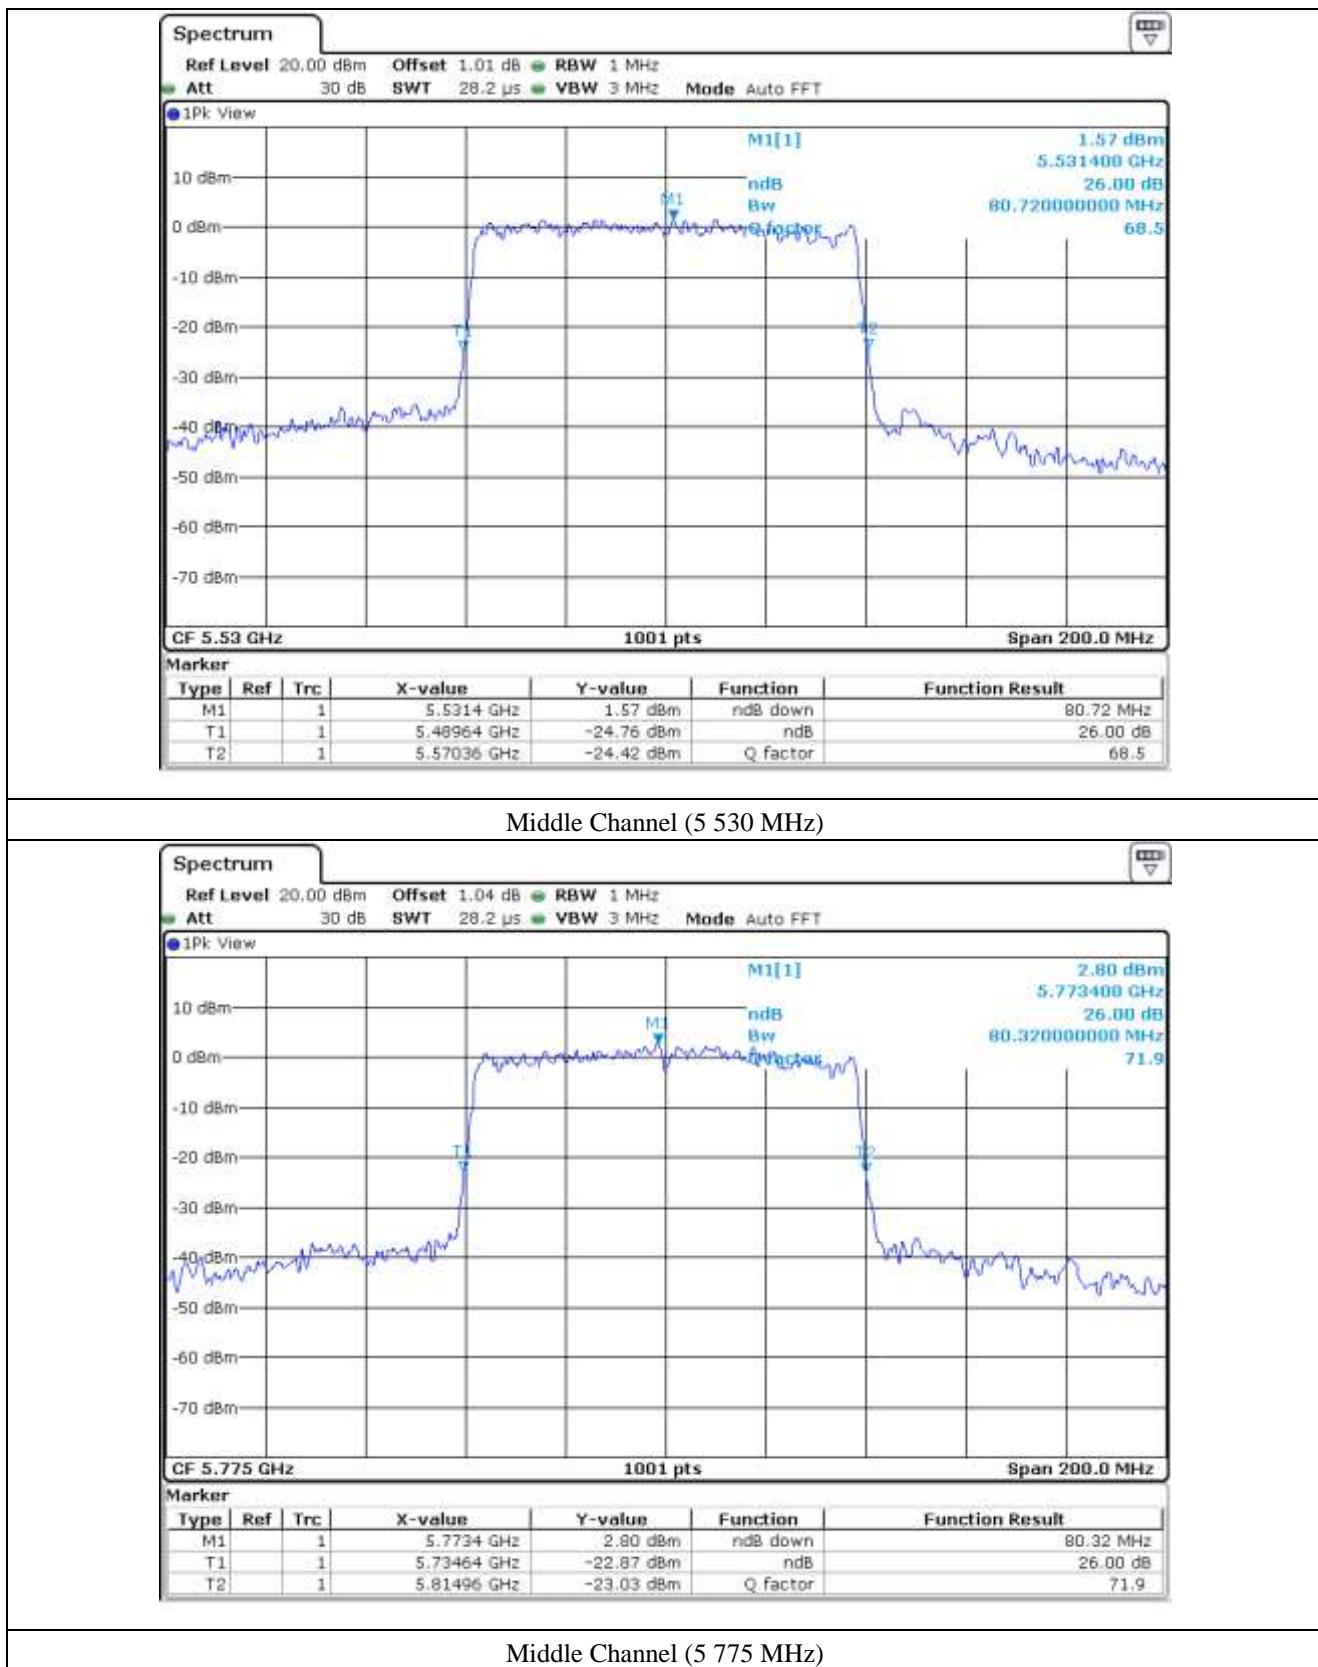



7.7.2 Test data for Antenna 1

-. Test Result : Pass

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	26 dB Bandwidth (MHz)
5 150 ~ 5 250	Middle	5 210.00	81.32
5 250 ~ 5 350	Middle	5 290.00	80.92
5 470 ~ 5 725	Middle	5 530.00	80.52
5 725 ~ 5 850	Middle	5 775.00	81.52

Remark: See next page for measurement data.

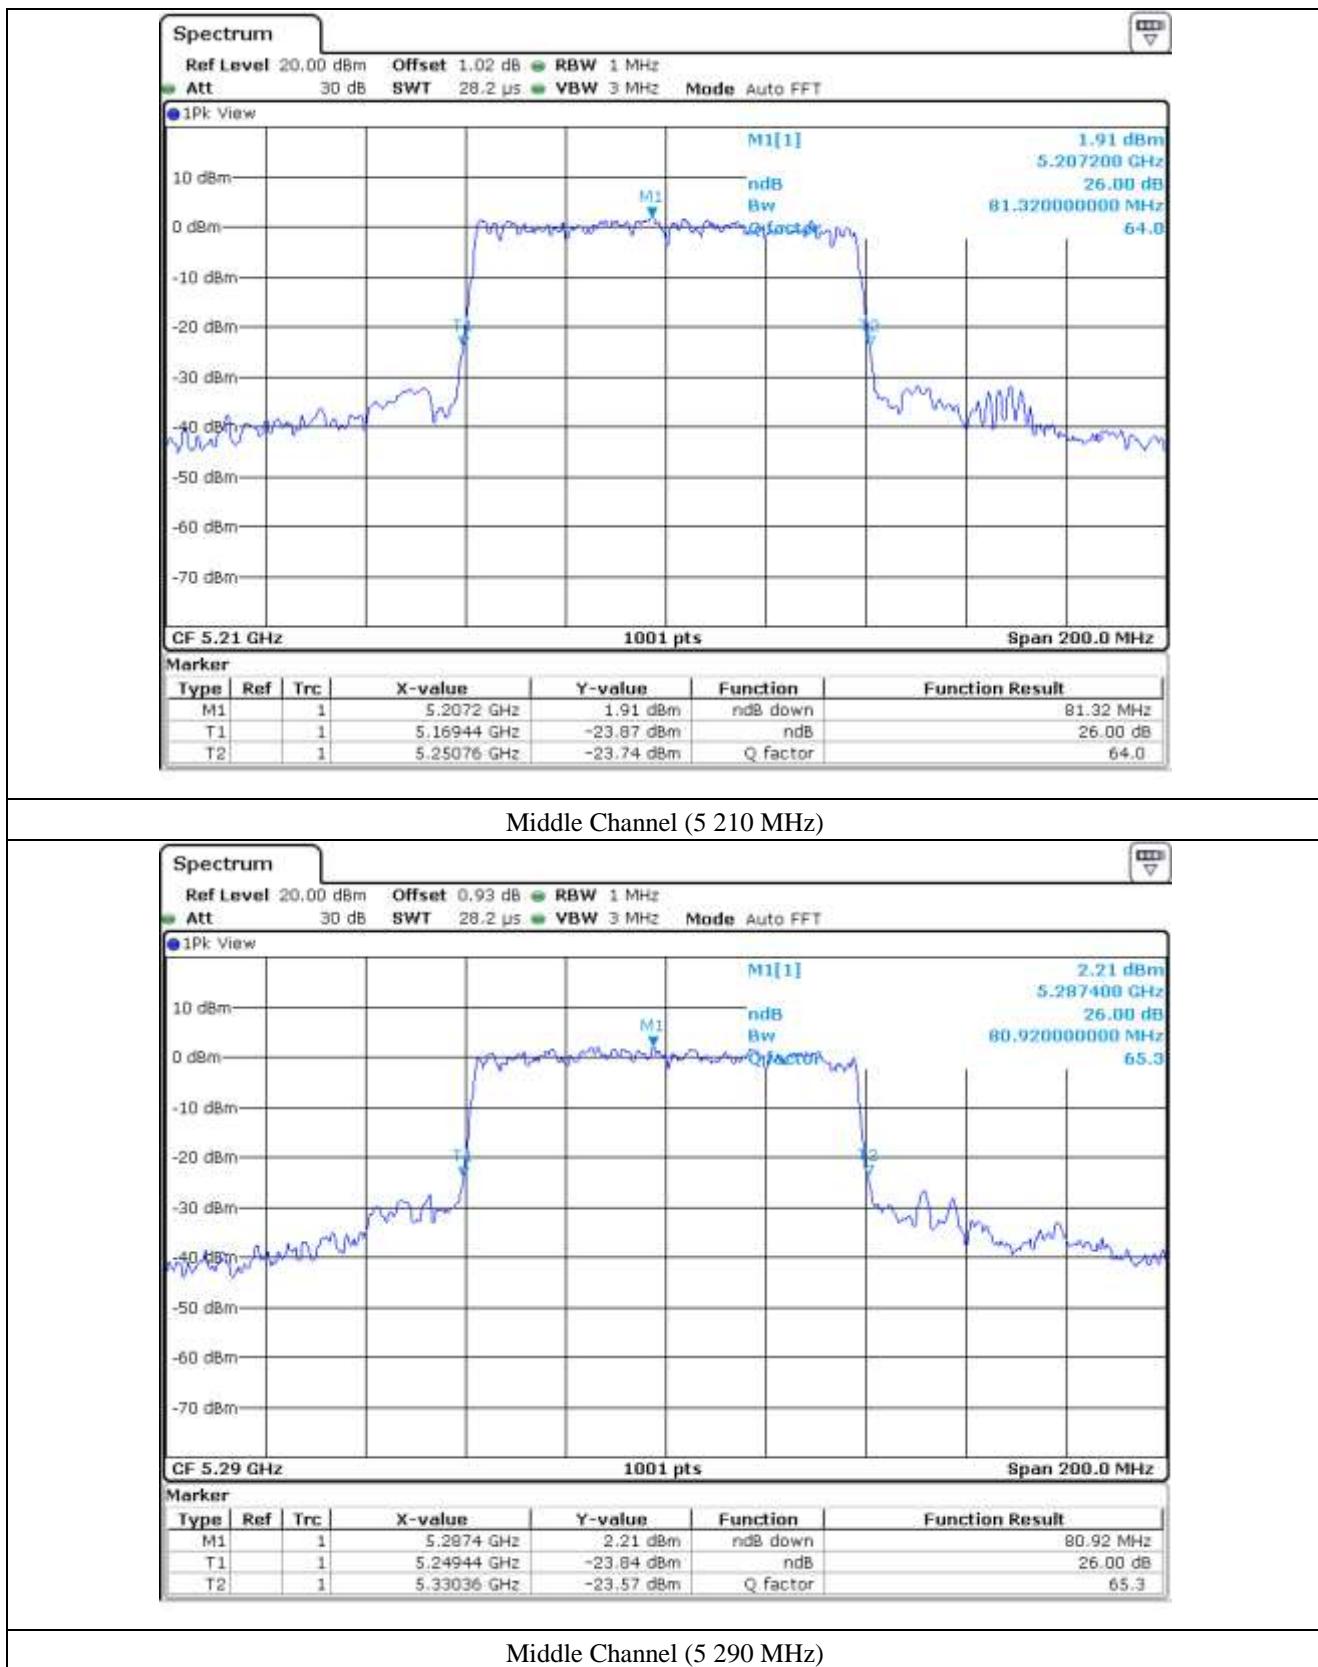


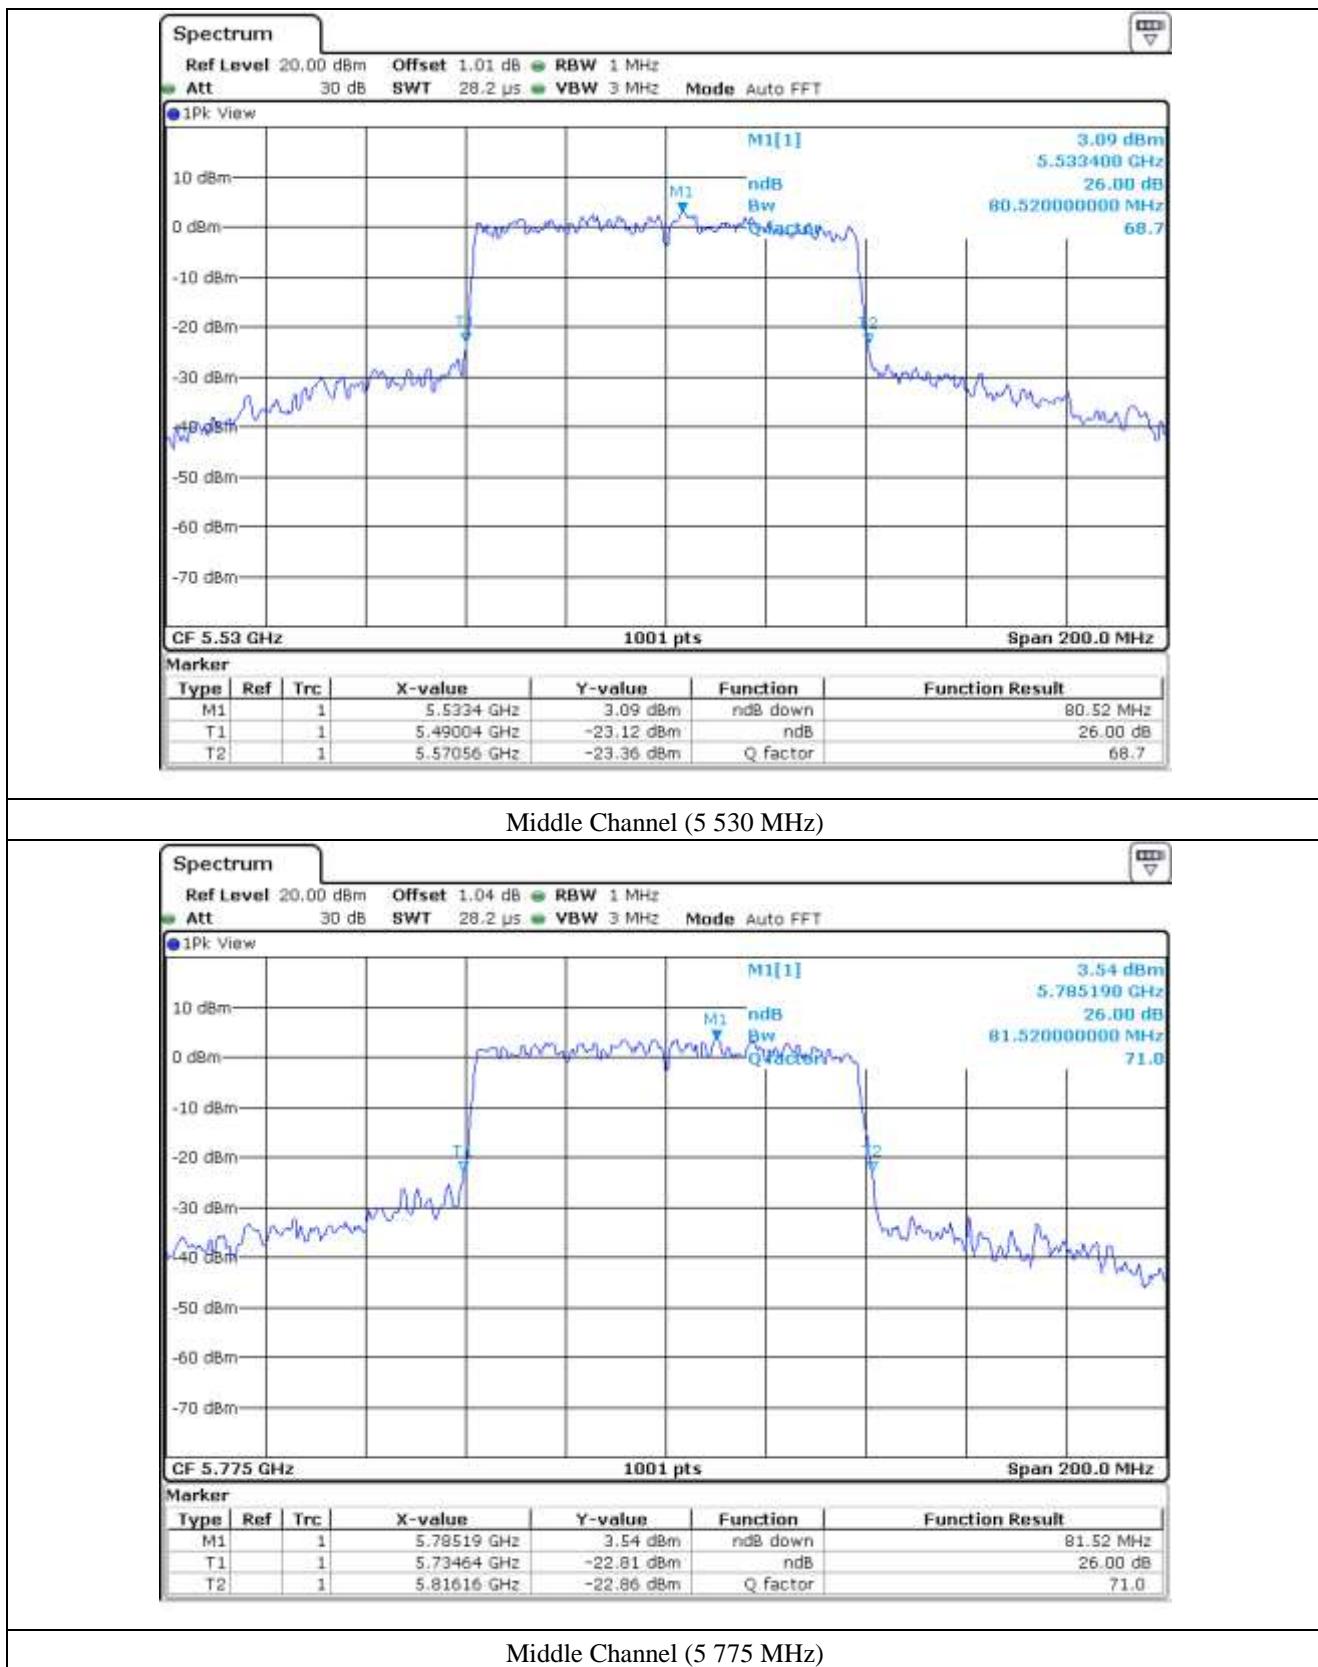

7.7.3 Test data for Staddle Channel_Antenna 0

- Test Result : Pass


FREQUENCY RANGE (MHz)	FREQUENCY (MHz)	26 dB Bandwidth (MHz)
5 470 ~ 5 725	5 690.00	75.56
5 725 ~ 5 850	5 690.00	5.36

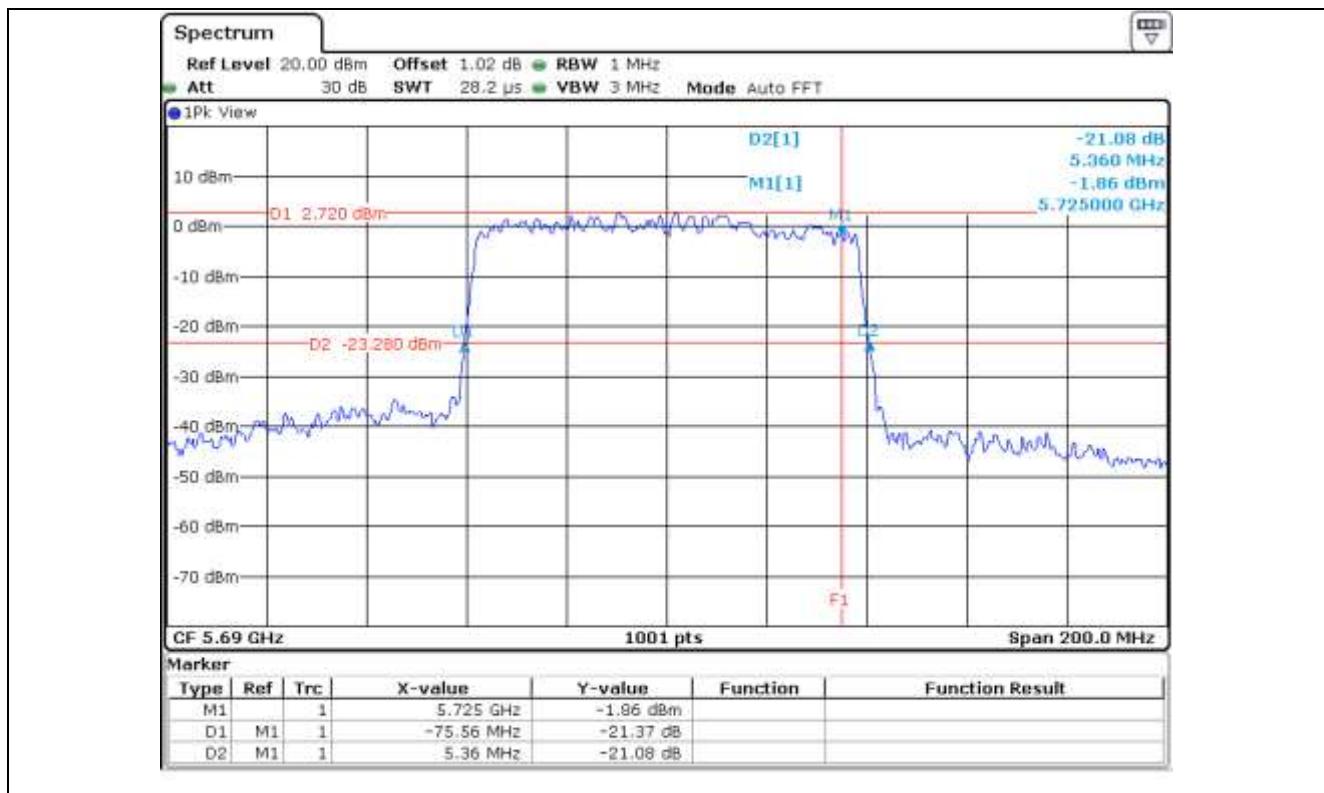

7.7.4 Test data for Staddle Channel_Antenna 1

- Test Result : Pass

FREQUENCY RANGE (MHz)	FREQUENCY (MHz)	26 dB Bandwidth (MHz)
5 470 ~ 5 725	5 690.00	75.56
5 725 ~ 5 850	5 690.00	5.36

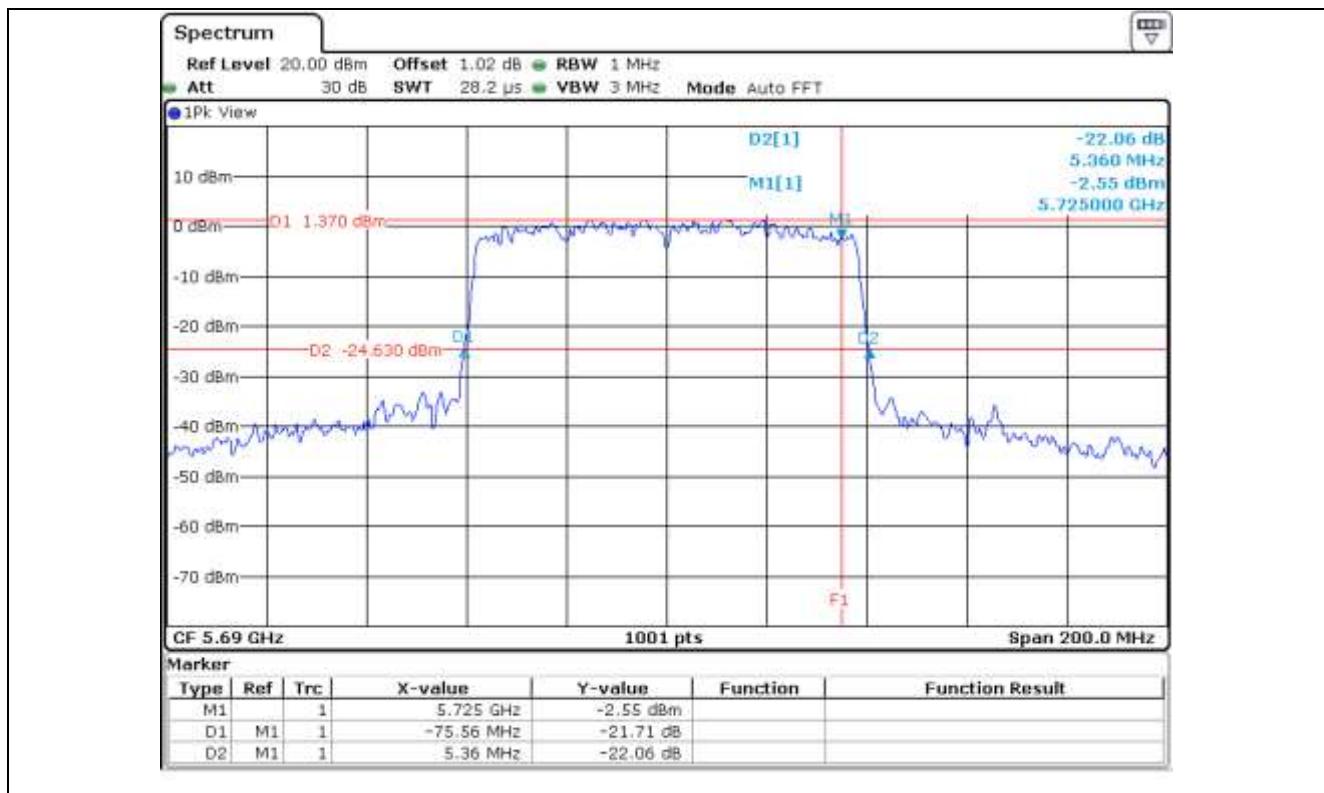

8. 6 dB BANDWIDTH

8.1 Operating environment

Temperature : 23 °C

Relative humidity : 41 % R.H.

8.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz, and peak detection was used. The 6 dB bandwidth is defined as the total spectrum over which the power is higher than the peak power minus 6 dB.



8.3 Test Date

August 21, 2020 ~ September 08, 2020


8.4 Test data for 802.11a RLAN Mode


8.4.1 Test data for Antenna 0

- Test Result : Pass


FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	6 dB Bandwidth (MHz)
5 725 ~ 5 850	Low	5 745.00	16.33
	Middle	5 785.00	16.33
	High	5 825.00	16.33

Remark: See next page for measurement data.

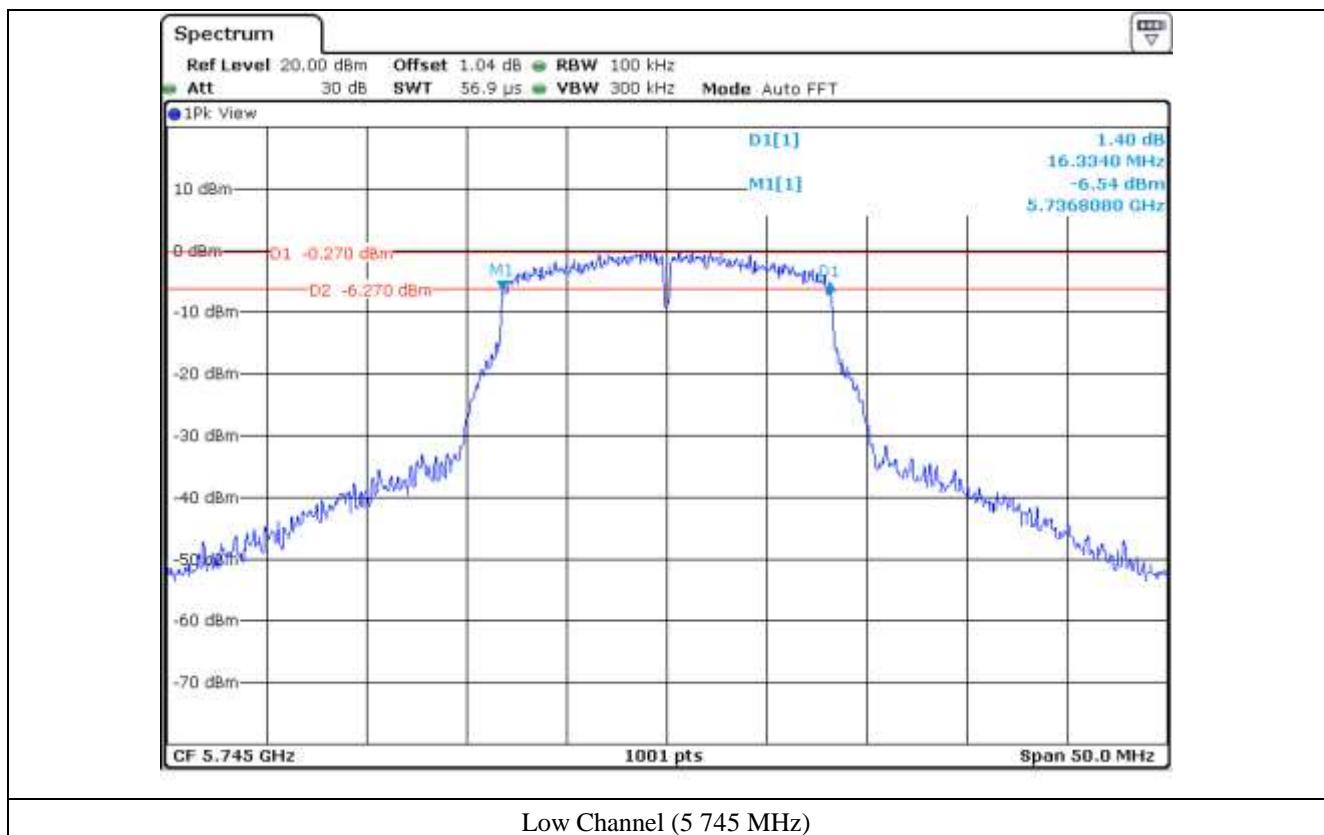

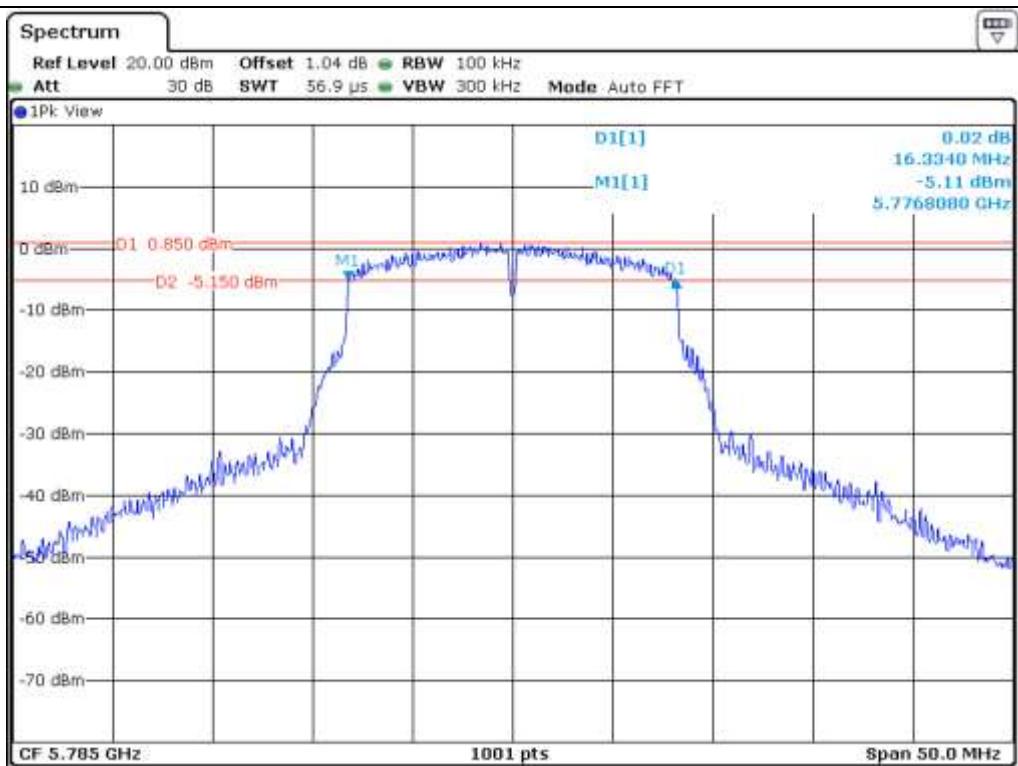

Middle Channel (5.785 MHz)

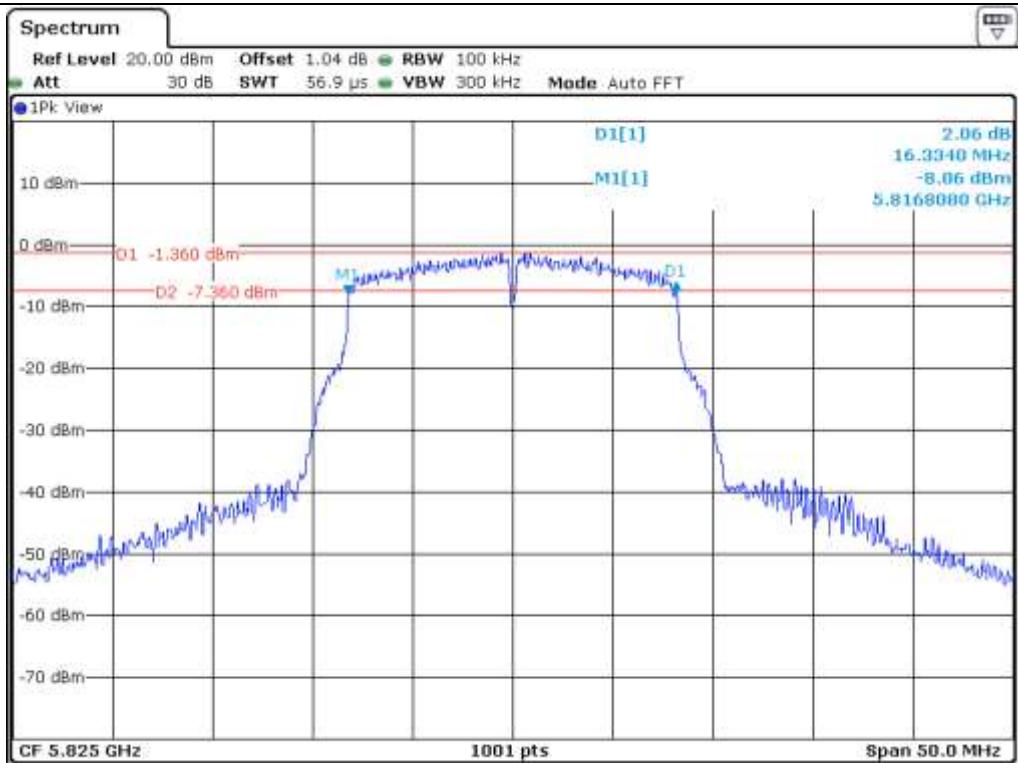


High Channel (5.825 MHz)


8.4.2 Test data for Antenna 1

- Test Result : Pass


FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	6 dB Bandwidth (MHz)
5 725 ~ 5 850	Low	5 745.00	16.33
	Middle	5 785.00	16.28
	High	5 825.00	16.33

Remark: See next page for measurement data.

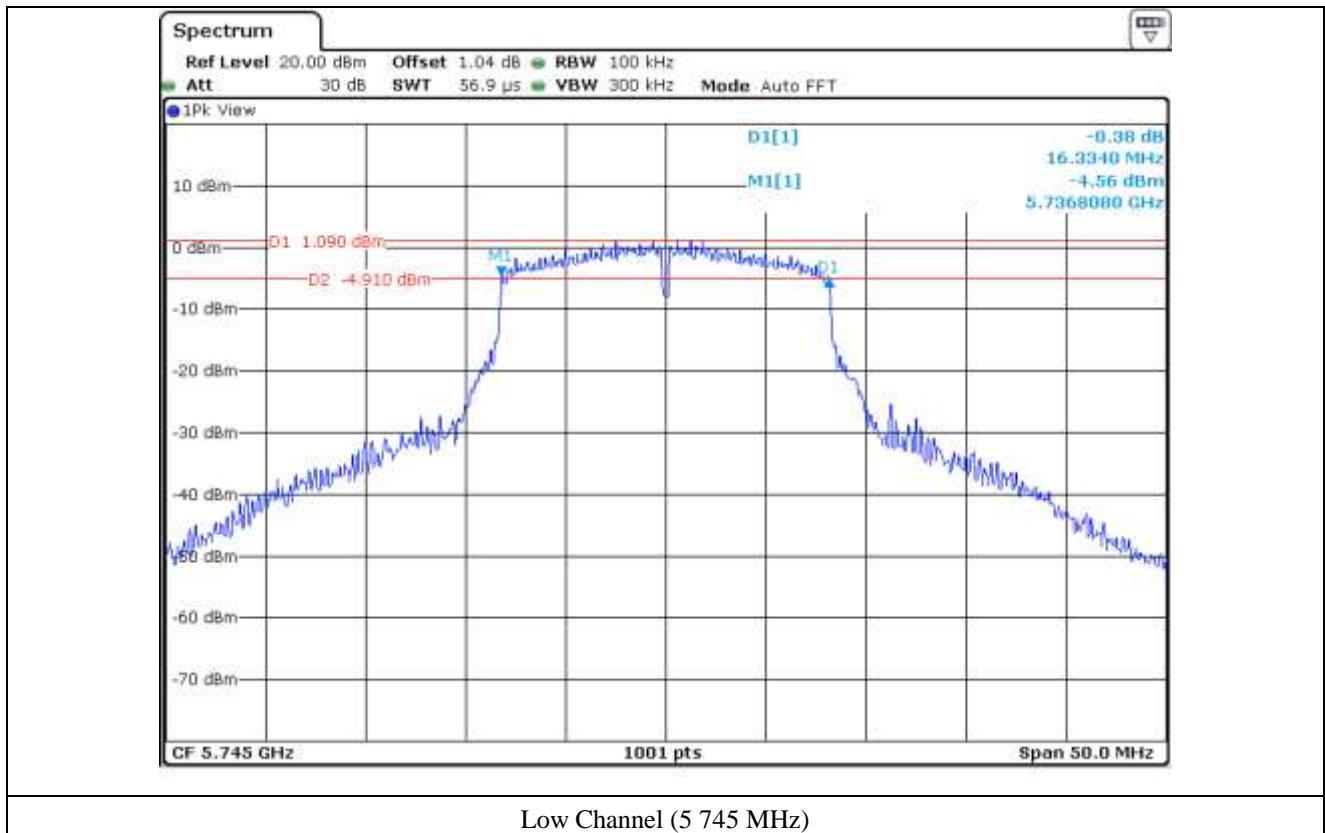

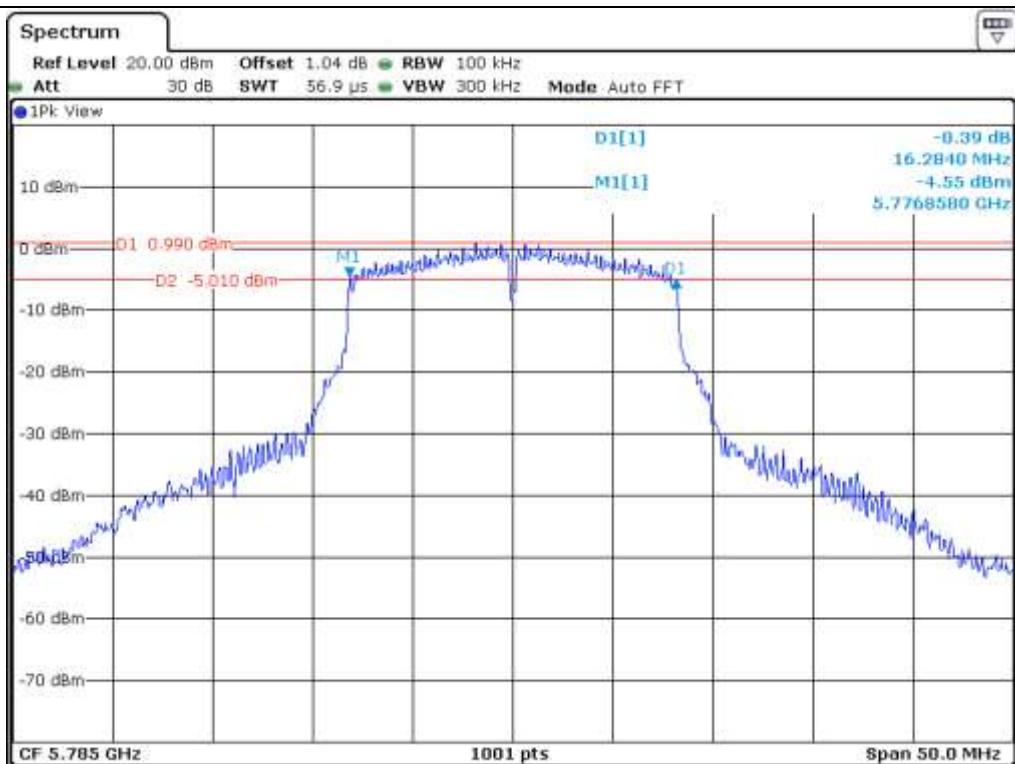

Middle Channel (5.785 MHz)

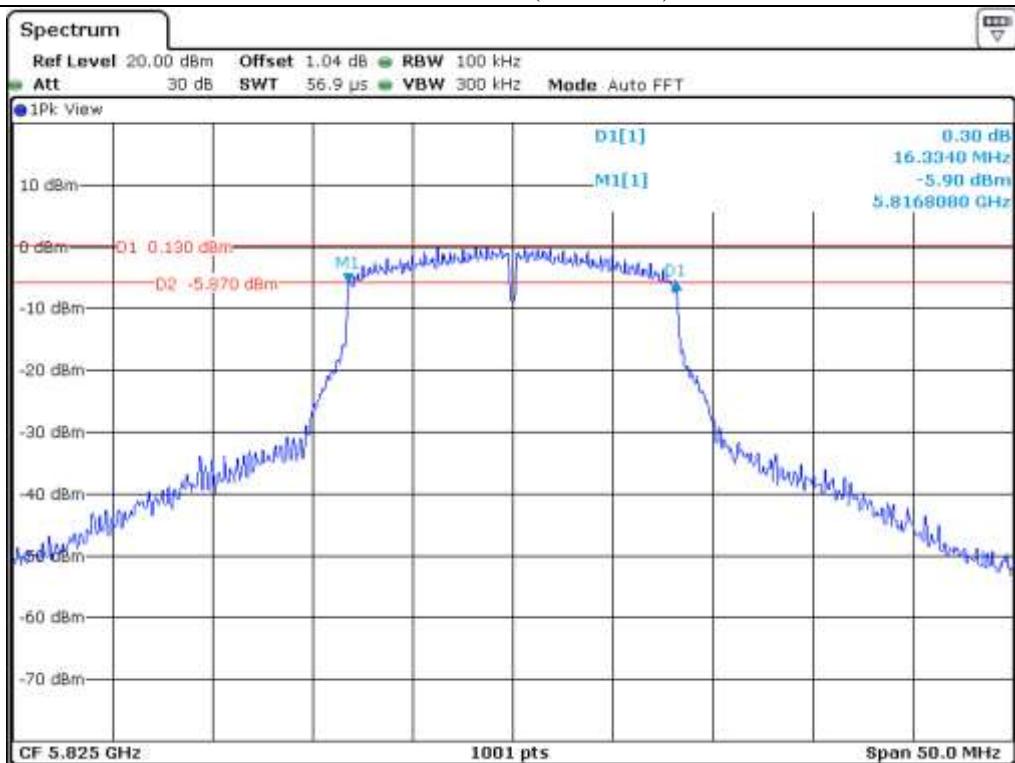

High Channel (5.825 MHz)


8.5 Test data for 802.11n_HT20 RLAN Mode


8.5.1 Test data for Antenna 0

- Test Result : Pass


FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	6 dB Bandwidth (MHz)
5 725 ~ 5 850	Low	5 745.00	17.63
	Middle	5 785.00	17.58
	High	5 825.00	17.53

Remark: See next page for measurement data.

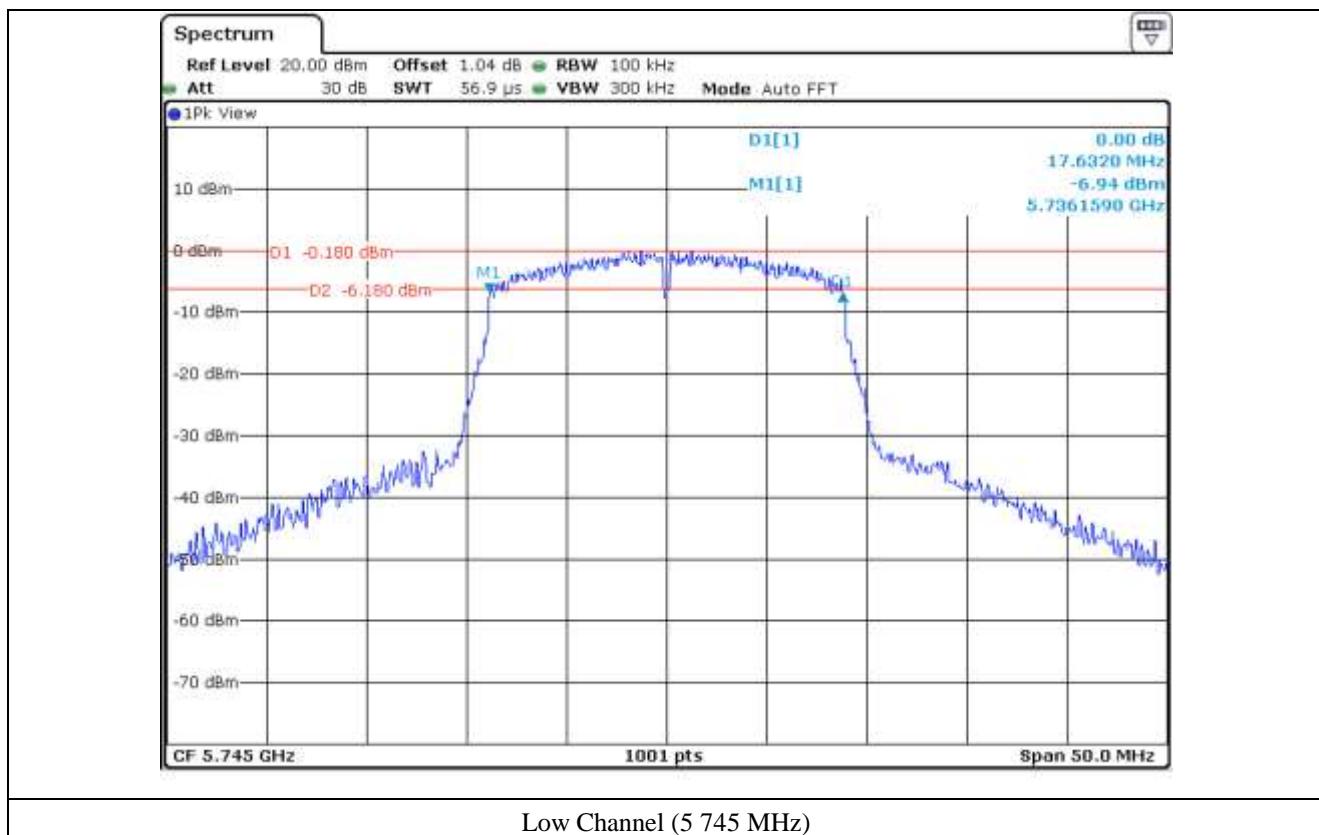

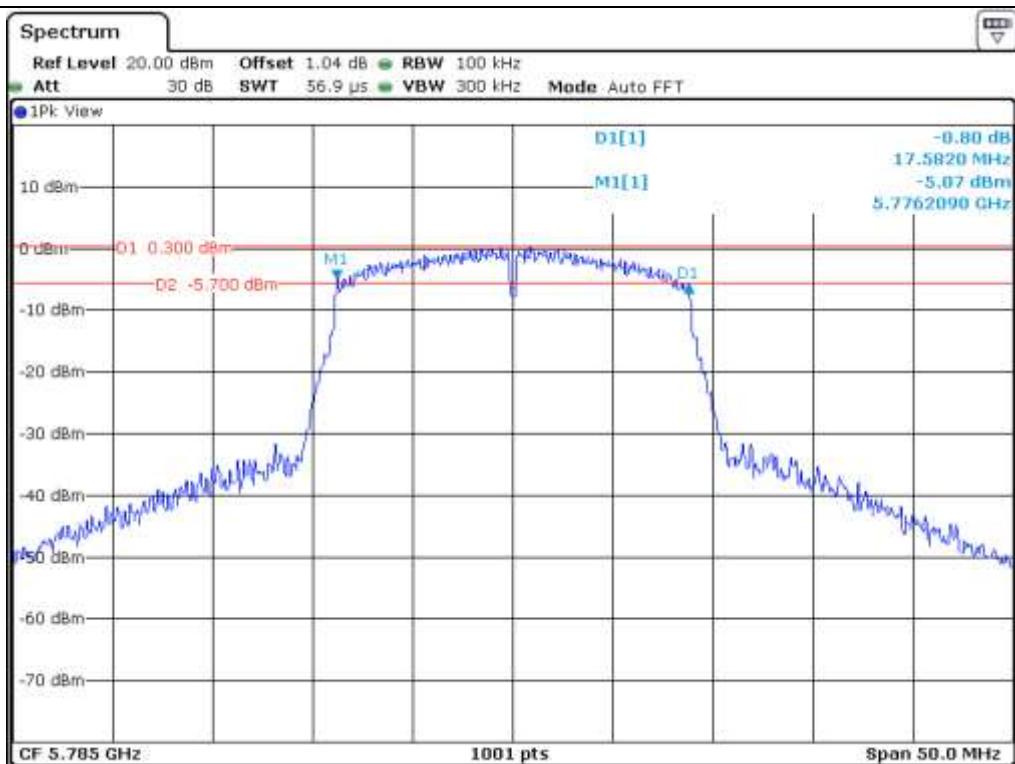

Middle Channel (5.785 MHz)

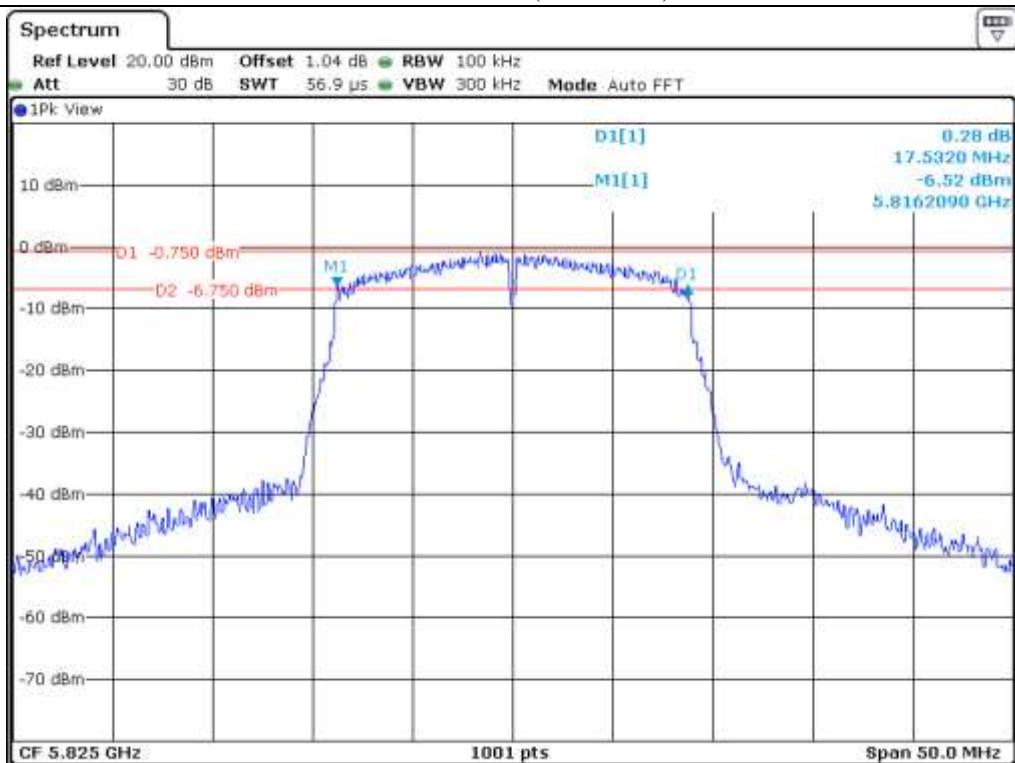


High Channel (5.825 MHz)


8.5.2 Test data for Antenna 1

- Test Result : Pass


FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	6 dB Bandwidth (MHz)
5 725 ~ 5 850	Low	5 745.00	17.48
	Middle	5 785.00	17.53
	High	5 825.00	17.53

Remark: See next page for measurement data.

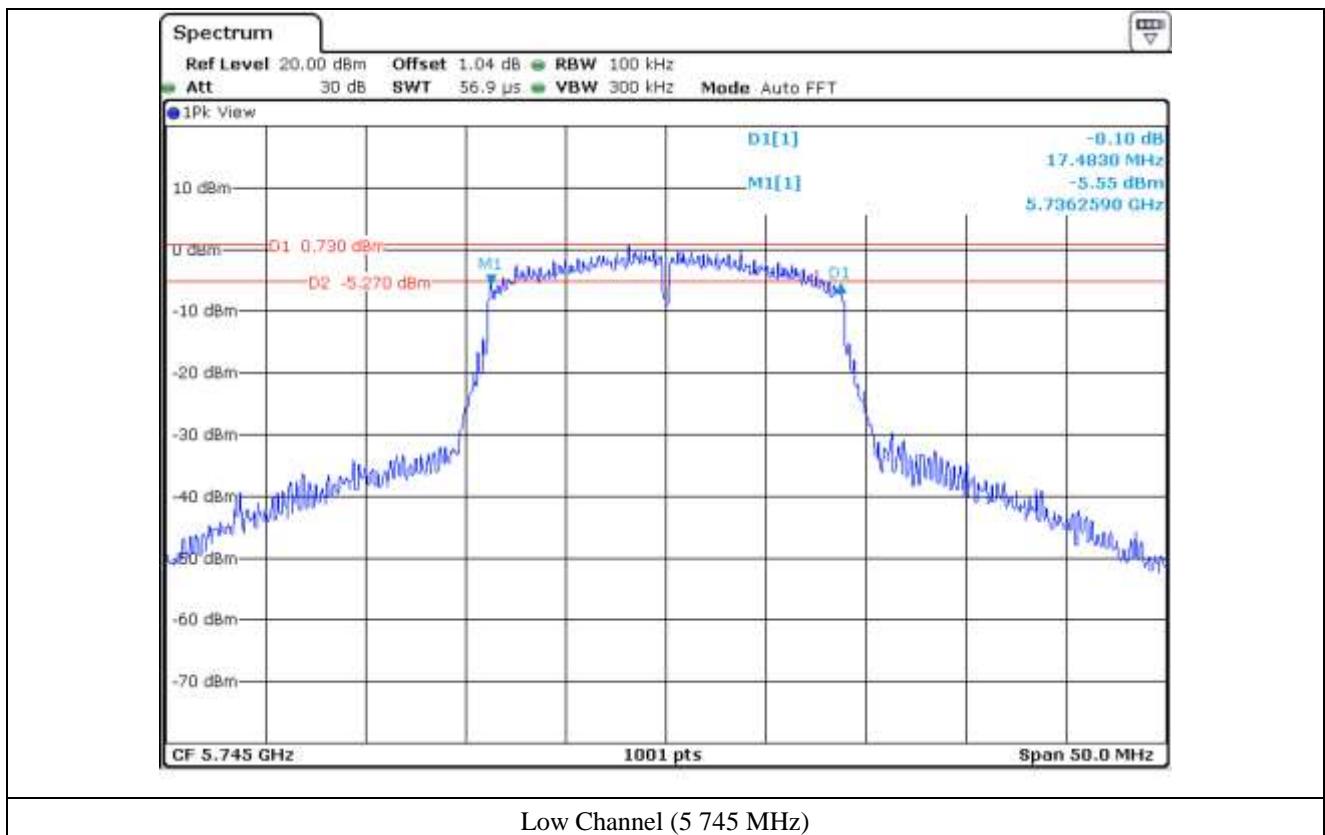

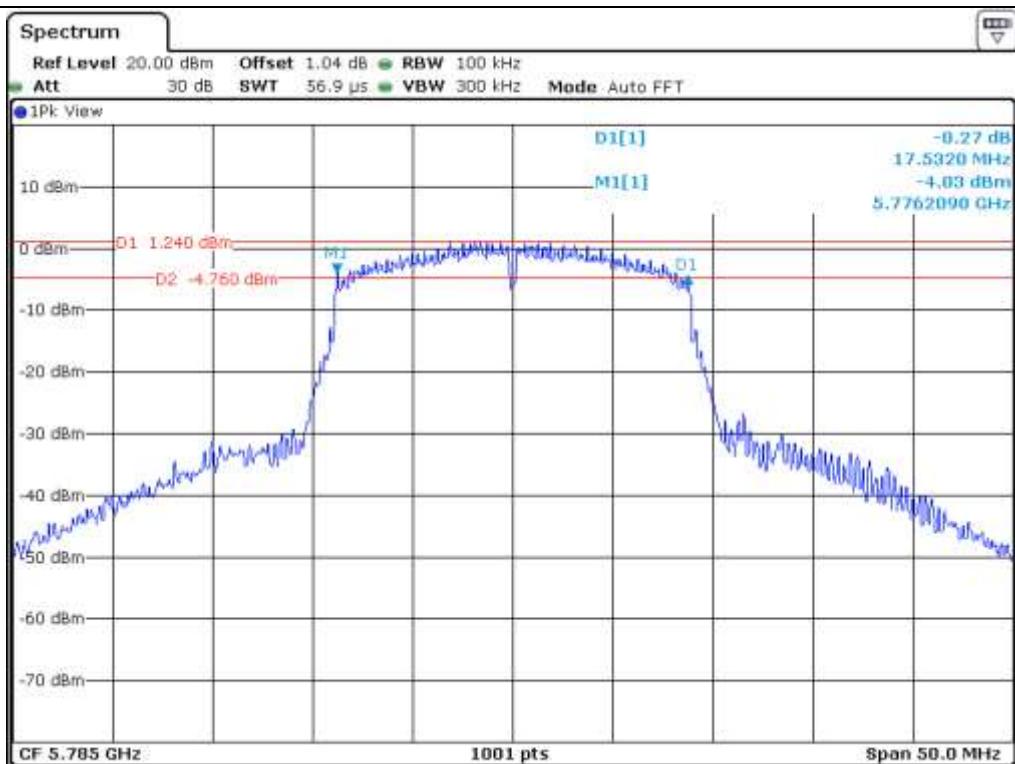

Middle Channel (5.785 MHz)

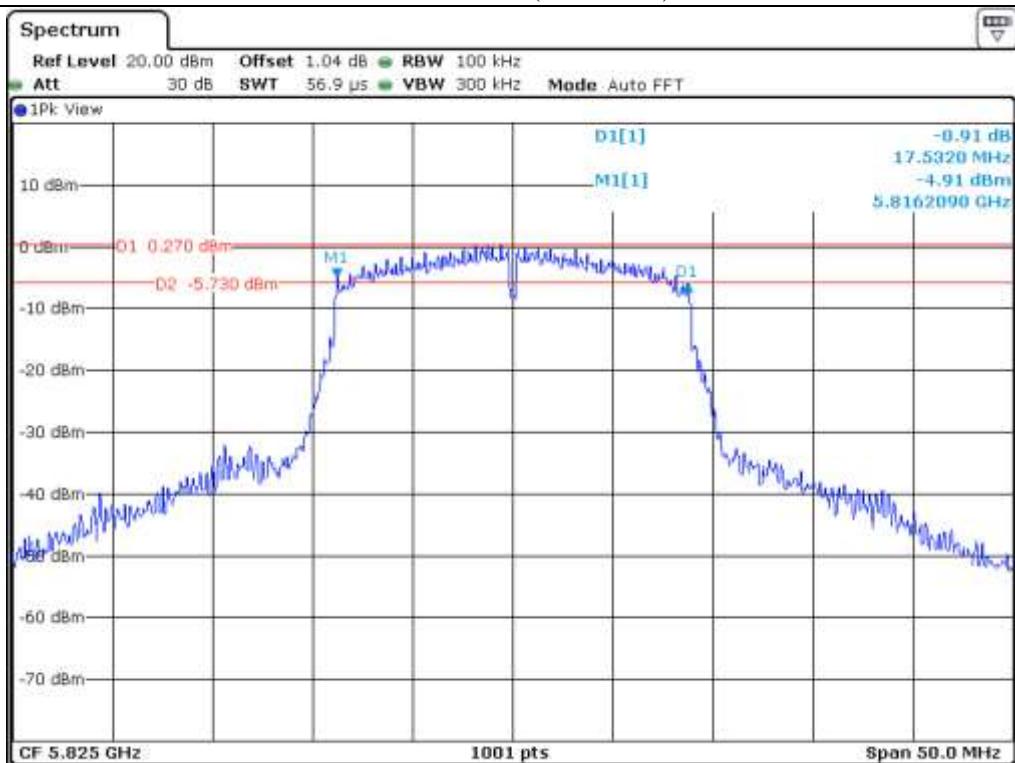

High Channel (5.825 MHz)


8.6 Test data for 802.11n_HT40 RLAN Mode


8.6.1 Test data for Antenna 0

- Test Result : Pass

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	6 dB Bandwidth (MHz)
5 725 ~ 5 850	Low	5 755.00	36.46
	High	5 795.00	36.46

Remark: See next page for measurement data.

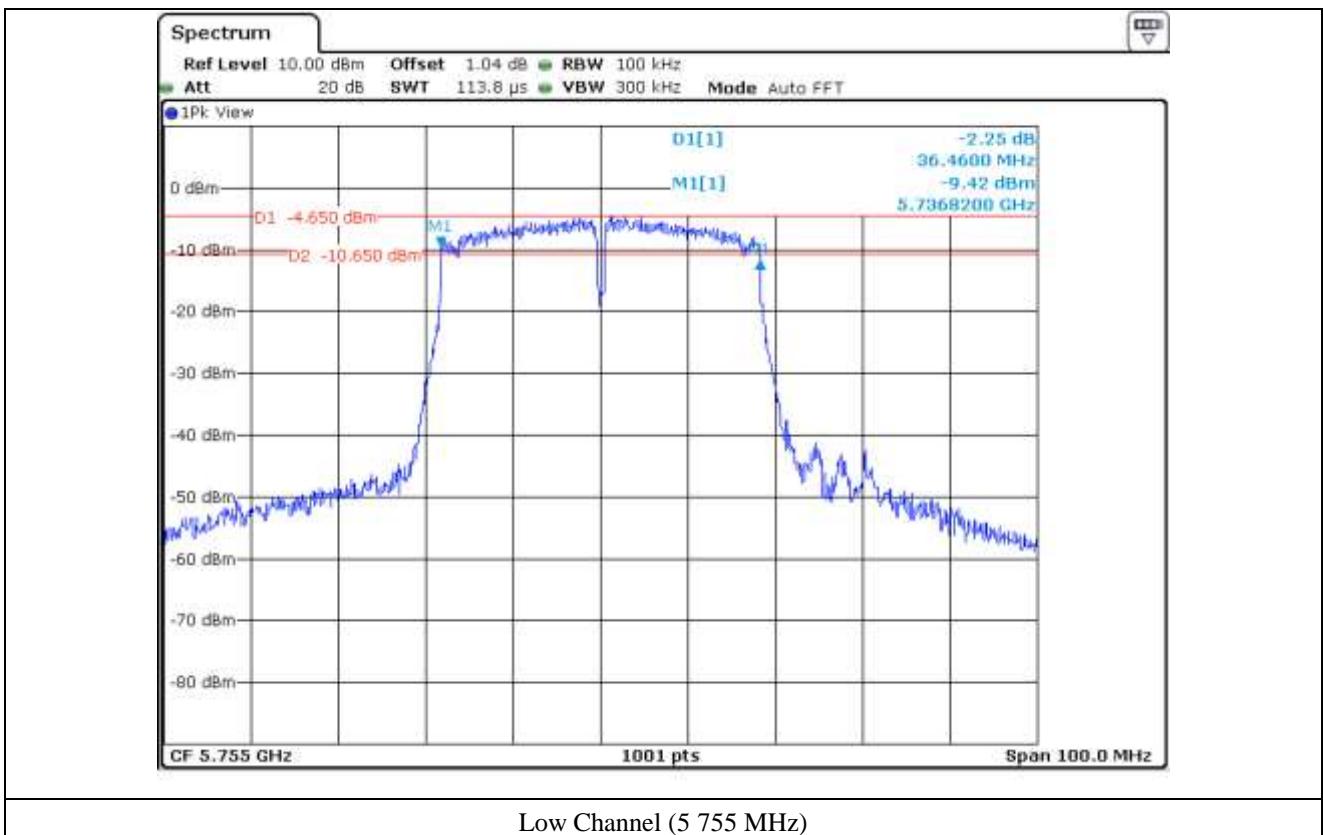

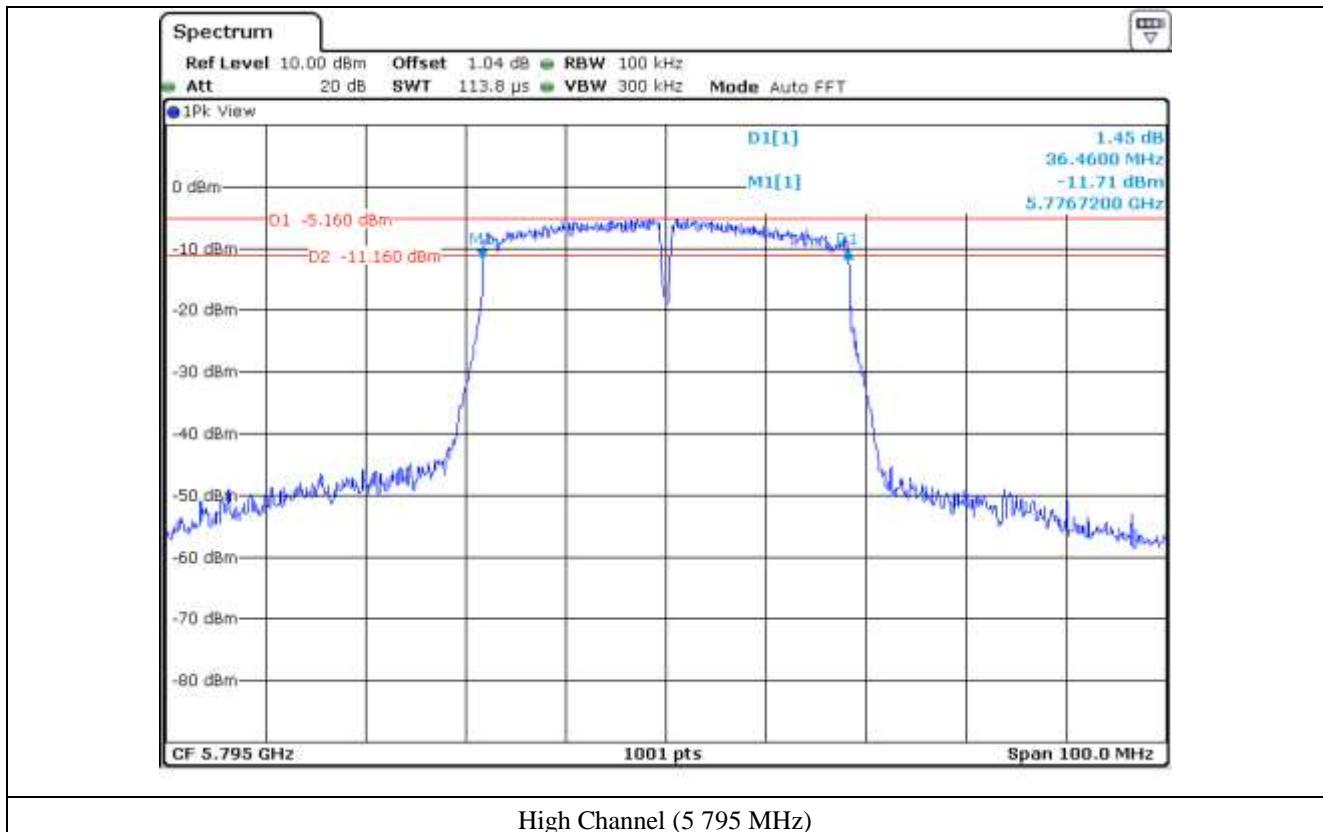



8.6.2 Test data for Antenna 1

- Test Result : Pass

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	6 dB Bandwidth (MHz)
5 725 ~ 5 850	Low	5 755.00	36.36
	High	5 795.00	36.46

Remark: See next page for measurement data.

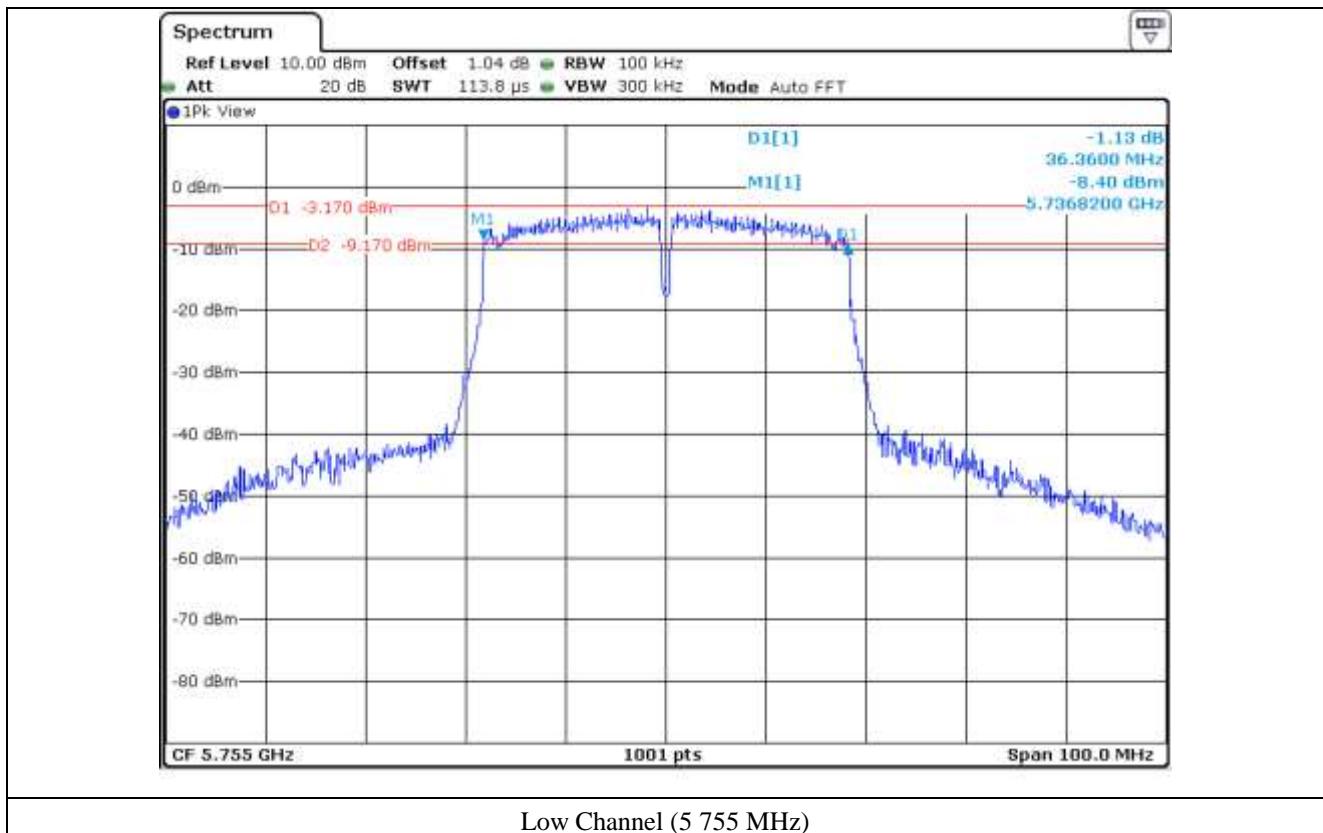

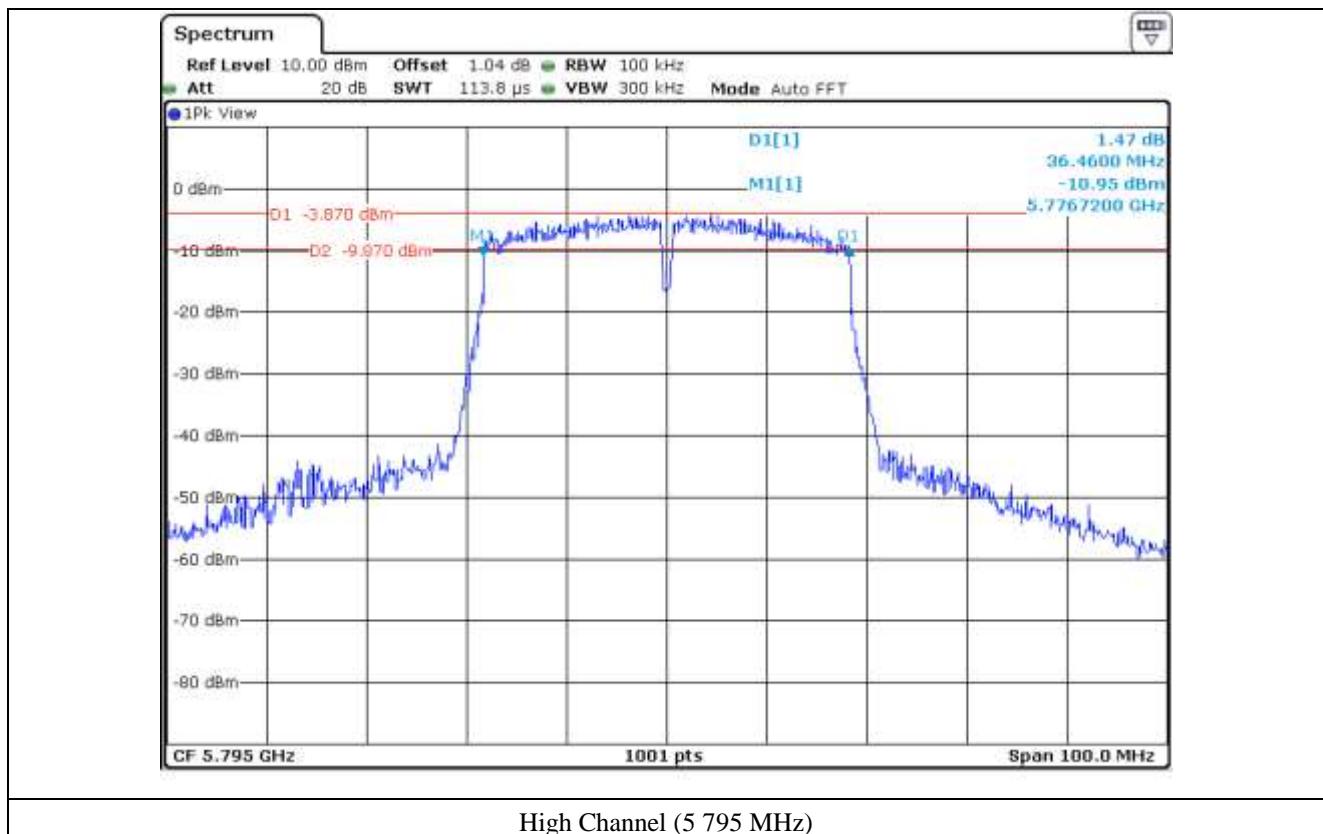


8.7 Test data for 802.11ac_VHT80 RLAN Mode

8.7.1 Test data for Antenna 0

- Test Result : Pass

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	6 dB Bandwidth (MHz)
5 725 ~ 5 850	Middle	5 775.00	76.72

Remark: See next page for measurement data.

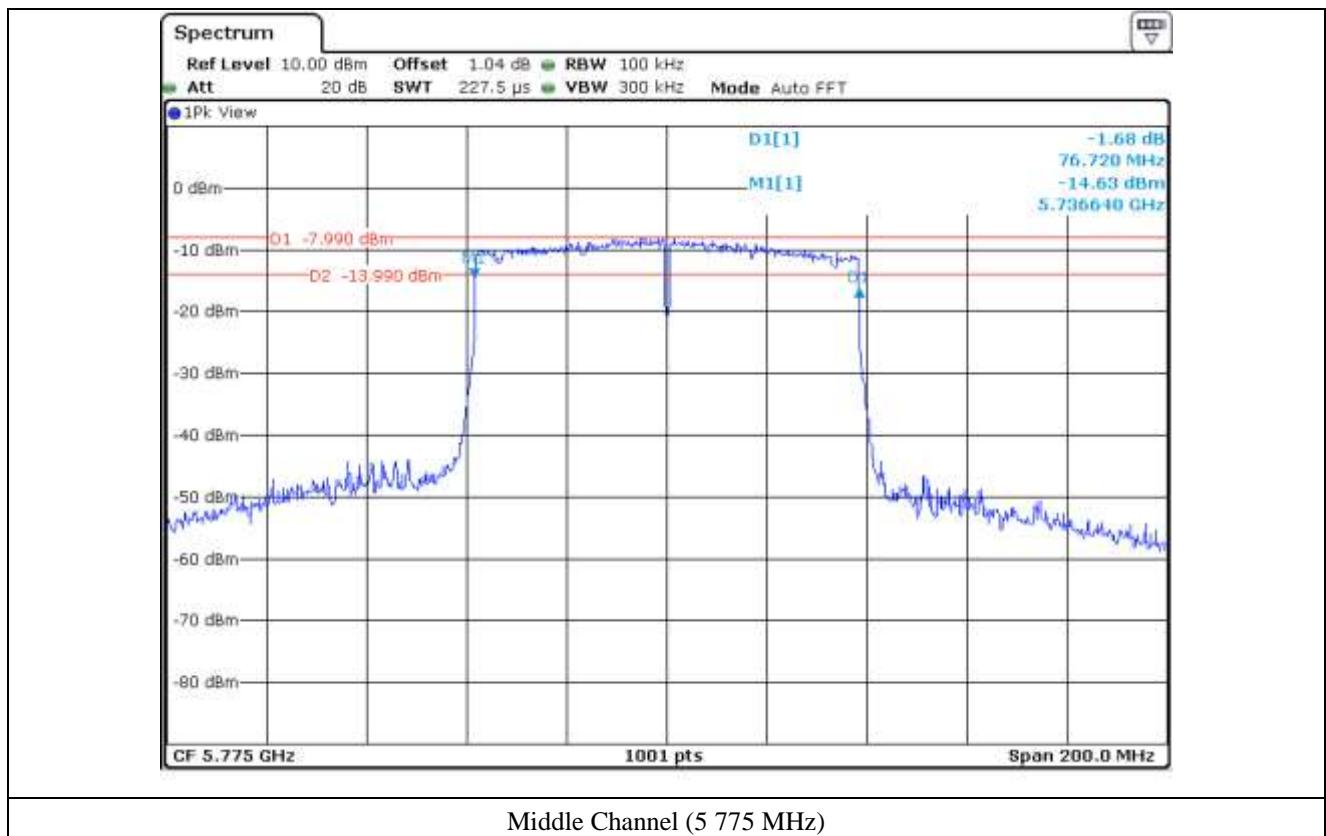


8.7.2 Test data for Antenna 1

- Test Result : Pass

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	6 dB Bandwidth (MHz)
5 725 ~ 5 850	Middle	5 775.00	76.72

Remark: See next page for measurement data.

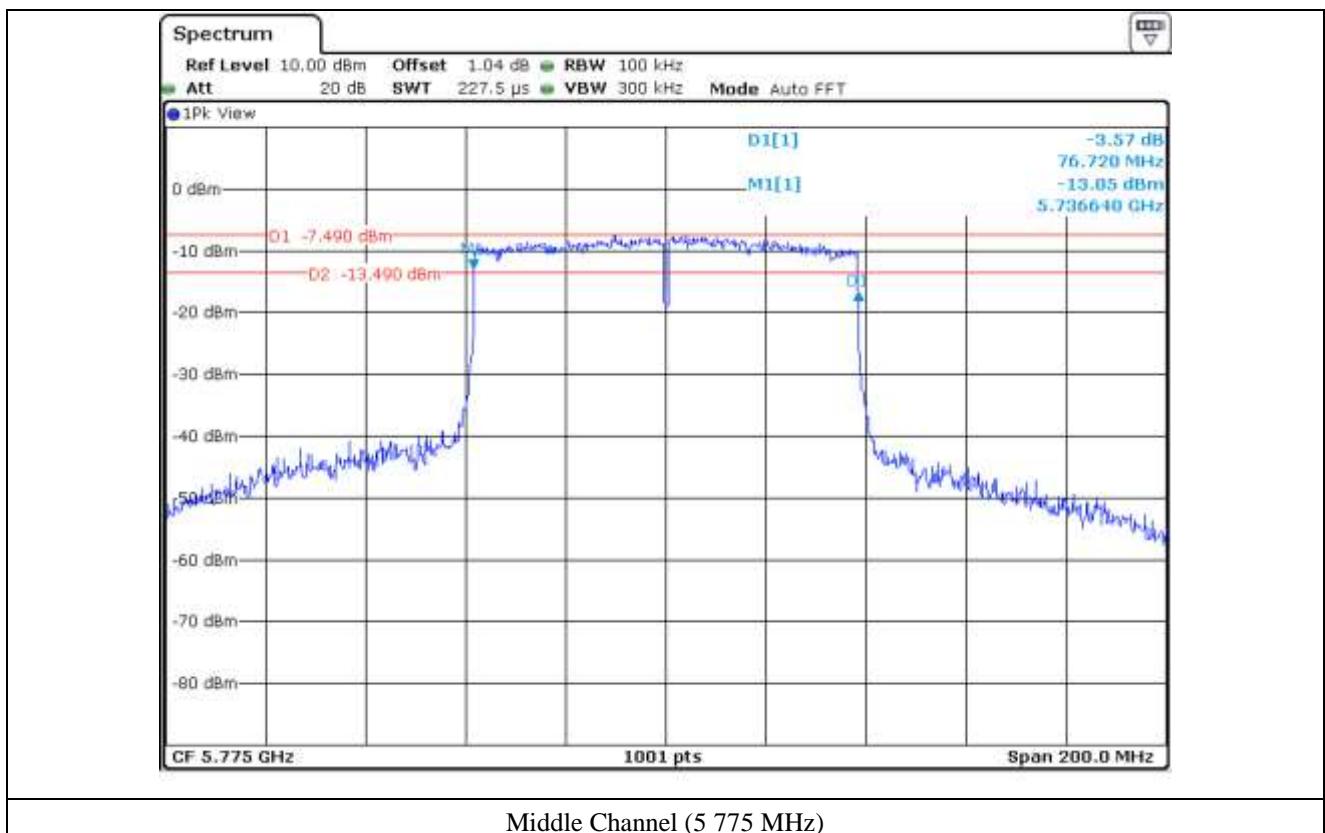

9. MAXIMUM PEAK OUTPUT POWER

9.1 Operating environment

Temperature : 23 °C


Relative humidity : 41 % R.H.

9.2 Test set-up

The maximum peak output power was measured with the wide band sensor connected to the antenna output of the EUT.

The Wide Band Sensor is measured when the EUT is transmitting at the appropriate center frequency its maximum power control level as described in Section E. 3.(KDB 789033 D02 General UNII Test Procedures New Rules v02r01).

Since this measurement is made only during the ON time of the transmitter, no duty cycle correction is required.

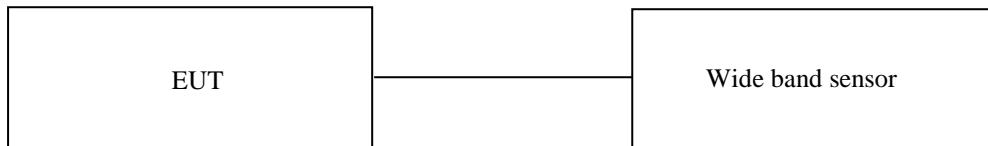

9.3 Test Date

August 21, 2020 ~ September 08, 2020

9.4 Test data for 802.11a RLAN Mode

9.4.1 Test data for Antenna 0

- Test Result : Pass
- Duty Cycle : > 98 %

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	MEASURED VALUE (dBm)	LIMIT (dBm)	MARGIN (dB)
5 150 ~ 5 250	Low	5 180.00	13.85	24.00	10.15
	Middle	5 220.00	15.50	24.00	8.50
	High	5 240.00	14.09	24.00	9.91
5 250 ~ 5 350	Low	5 260.00	14.53	24.00	9.47
	Middle	5 300.00	14.50	24.00	9.50
	High	5 320.00	14.95	24.00	9.05
5 470 ~ 5 725	Low	5 500.00	14.39	24.00	9.61
	Middle	5 580.00	13.41	24.00	10.59
	High	5 700.00	14.54	24.00	9.46
5 725 ~ 5 850	Low	5 745.00	13.89	30.00	16.11
	Middle	5 785.00	14.10	30.00	15.90
	High	5 825.00	13.18	30.00	16.82

Remark : Margin = Limit – Measured Value (=Power Sensor Reading + Cable Loss)

9.4.2 Test data for Antenna 1

- . Test Result : Pass
- . Duty Cycle : > 98 %

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	MEASURED VALUE (dBm)	LIMIT (dBm)	MARGIN (dB)
5 150 ~ 5 250	Low	5 180.00	11.93	24.00	12.07
	Middle	5 220.00	12.85	24.00	11.15
	High	5 240.00	11.91	24.00	12.09
5 250 ~ 5 350	Low	5 260.00	12.89	24.00	11.11
	Middle	5 300.00	11.75	24.00	12.25
	High	5 320.00	12.96	24.00	11.04
5 470 ~ 5 725	Low	5 500.00	12.72	24.00	11.28
	Middle	5 580.00	12.62	24.00	11.38
	High	5 700.00	12.48	24.00	11.52
5 725 ~ 5 850	Low	5 745.00	12.28	30.00	17.72
	Middle	5 785.00	13.35	30.00	16.65
	High	5 825.00	11.69	30.00	18.31

Remark : Margin = Limit – Measured Value (=Power Sensor Reading + Cable Loss)

9.4.3 Test data for Multiple Transmit

- . Test Result : Pass

- . Duty Cycle : > 98 %

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	MEASURED VALUE (dBm)	LIMIT (dBm)	MARGIN (dB)
5 150 ~ 5 250	Low	5 180.00	16.01	23.76	7.75
	Middle	5 220.00	17.38	23.76	6.38
	High	5 240.00	16.15	23.76	7.61
5 250 ~ 5 350	Low	5 260.00	16.80	24.00	7.20
	Middle	5 300.00	16.35	24.00	7.65
	High	5 320.00	17.08	24.00	6.92
5 470 ~ 5 725	Low	5 500.00	16.65	24.00	7.35
	Middle	5 580.00	16.04	24.00	7.96
	High	5 700.00	16.64	24.00	7.36
5 725 ~ 5 850	Low	5 745.00	16.17	30.00	13.83
	Middle	5 785.00	16.75	30.00	13.25
	High	5 825.00	15.51	30.00	14.49

Remark 1: Margin = Limit – Measured Value (=Power Sensor Reading + Cable Loss)

Remark 2: Calculated Output Power= $10\log(10^{(\text{Antenna0 Output Power}/10)} + 10^{(\text{Antenna1 Output Power}/10)})$

9.4.4 Test data for Staddle Channel_Antenna 0

- . Test Result : Pass

FREQUENCY RANGE (MHz)	FREQUENCY (MHz)	MEASURED VALUE (dBm)	LIMIT (dBm)	MARGIN (dB)
5 470 ~ 5 725	5 720.00	12.82	24.00	11.18
5 725 ~ 5 825	5 720.00	5.28	30.00	24.72

9.4.5 Test data for Staddle Channel_Antenna 1

- . Test Result : Pass

FREQUENCY RANGE (MHz)	FREQUENCY (MHz)	MEASURED VALUE (dBm)	LIMIT (dBm)	MARGIN (dB)
5 470 ~ 5 725	5 720.00	14.04	24.00	9.96
5 725 ~ 5 825	5 720.00	5.61	30.00	24.39

9.4.6 Test data for Staddle Channel_Multiple Transmit

- . Test Result : Pass

FREQUENCY RANGE (MHz)	FREQUENCY (MHz)	MEASURED VALUE (dBm)	LIMIT (dBm)	MARGIN (dB)
5 470 ~ 5 725	5 720.00	16.48	24.00	7.52
5 725 ~ 5 825	5 720.00	8.46	30.00	21.54

Remark 1 : Margin = Limit – Measured Value (=Receiver Reading + Cable Loss)

Remark 2 : Calculated Output Power= $10\log(10^{(\text{Antenna1 Output Power}/10)}+10^{(\text{Antenna2 Output Power}/10)})$

9.5 Test data for 802.11n_HT20 RLAN Mode

9.5.1 Test data for Antenna 0

- Test Result : Pass
- Duty Cycle : > 98 %

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	MEASURED VALUE (dBm)	LIMIT (dBm)	MARGIN (dB)
5 150 ~ 5 250	Low	5 180.00	13.38	24.00	10.62
	Middle	5 220.00	13.42	24.00	10.58
	High	5 240.00	13.81	24.00	10.19
5 250 ~ 5 350	Low	5 260.00	12.32	24.00	11.68
	Middle	5 300.00	12.94	24.00	11.06
	High	5 320.00	12.71	24.00	11.29
5 470 ~ 5 725	Low	5 500.00	11.11	24.00	12.89
	Middle	5 580.00	11.24	24.00	12.76
	High	5 700.00	11.51	24.00	12.49
5 725 ~ 5 850	Low	5 745.00	13.84	30.00	16.16
	Middle	5 785.00	13.07	30.00	16.93
	High	5 825.00	13.27	30.00	16.73

Remark : Margin = Limit – Measured Value (=Power Sensor Reading + Cable Loss)

9.5.2 Test data for Antenna 1

- . Test Result : Pass
- . Duty Cycle : > 98 %

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	MEASURED VALUE (dBm)	LIMIT (dBm)	MARGIN (dB)
5 150 ~ 5 250	Low	5 180.00	11.49	24.00	12.51
	Middle	5 220.00	12.91	24.00	11.09
	High	5 240.00	11.85	24.00	12.15
5 250 ~ 5 350	Low	5 260.00	12.54	24.00	11.46
	Middle	5 300.00	11.10	24.00	12.90
	High	5 320.00	12.68	24.00	11.32
5 470 ~ 5 725	Low	5 500.00	10.45	24.00	13.55
	Middle	5 580.00	10.85	24.00	13.15
	High	5 700.00	10.24	24.00	13.76
5 725 ~ 5 850	Low	5 745.00	13.87	30.00	16.13
	Middle	5 785.00	14.12	30.00	15.88
	High	5 825.00	14.23	30.00	15.77

Remark : Margin = Limit – Measured Value (=Power Sensor Reading + Cable Loss)

9.5.3 Test data for Multiple Transmit

- . Test Result : Pass

- . Duty Cycle : > 98 %

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	MEASURED VALUE (dBm)	LIMIT (dBm)	MARGIN (dB)
5 150 ~ 5 250	Low	5 180.00	15.55	24.00	8.45
	Middle	5 220.00	16.18	24.00	7.82
	High	5 240.00	15.95	24.00	8.05
5 250 ~ 5 350	Low	5 260.00	15.44	24.00	8.56
	Middle	5 300.00	15.13	24.00	8.87
	High	5 320.00	15.71	24.00	8.29
5 470 ~ 5 725	Low	5 500.00	13.80	24.00	10.20
	Middle	5 580.00	14.06	24.00	9.94
	High	5 700.00	13.93	24.00	10.07
5 725 ~ 5 850	Low	5 745.00	16.87	30.00	13.13
	Middle	5 785.00	16.64	30.00	13.36
	High	5 825.00	16.79	30.00	13.21

Remark 1: Margin = Limit – Measured Value (=Power Sensor Reading + Cable Loss)

Remark 2: Calculated Output Power= $10\log(10^{(\text{Antenna0 Output Power}/10)} + 10^{(\text{Antenna1 Output Power}/10)})$

9.5.4 Test data for Staddle Channel_Antenna 0

- . Test Result : Pass

FREQUENCY RANGE (MHz)	FREQUENCY (MHz)	MEASURED VALUE (dBm)	LIMIT (dBm)	MARGIN (dB)
5 470 ~ 5 725	5 720.00	12.95	24.00	11.05
5 725 ~ 5 825	5 720.00	5.39	30.00	24.61

9.5.5 Test data for Staddle Channel_Antenna 1

- . Test Result : Pass

FREQUENCY RANGE (MHz)	FREQUENCY (MHz)	MEASURED VALUE (dBm)	LIMIT (dBm)	MARGIN (dB)
5 470 ~ 5 725	5 720.00	14.11	24.00	9.89
5 725 ~ 5 825	5 720.00	6.29	30.00	23.71

9.5.6 Test data for Staddle Channel_Multiple Transmit

- . Test Result : Pass

FREQUENCY RANGE (MHz)	FREQUENCY (MHz)	MEASURED VALUE (dBm)	LIMIT (dBm)	MARGIN (dB)
5 470 ~ 5 725	5 720.00	16.58	24.00	7.42
5 725 ~ 5 825	5 720.00	8.87	30.00	21.13

Remark 1 : Margin = Limit – Measured Value (=Receiver Reading + Cable Loss)

Remark 2 : Calculated Output Power= $10\log(10^{(\text{Antenna1 Output Power}/10)} + 10^{(\text{Antenna2 Output Power}/10)})$

9.6 Test data for 802.11n_HT40 RLAN Mode

9.6.1 Test data for Antenna 0

- Test Result : Pass
- Duty Cycle : > 98 %

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	MEASURED VALUE (dBm)	LIMIT (dBm)	MARGIN (dB)
5 150 ~ 5 250	Low	5 190.00	13.69	24.00	10.31
	High	5 230.00	13.85	24.00	10.15
5 250 ~ 5 350	Low	5 270.00	13.24	24.00	10.76
	High	5 310.00	13.25	24.00	10.75
5 470 ~ 5 725	Low	5 510.00	12.40	24.00	11.60
	Middle	5 550.00	12.09	24.00	11.91
	High	5 670.00	12.08	24.00	11.92
5 725 ~ 5 850	Low	5 755.00	11.95	30.00	18.05
	High	5 795.00	12.19	30.00	17.81

Remark : Margin = Limit – Measured Value (=Power Sensor Reading + Cable Loss)

9.6.2 Test data for Antenna 1

- Test Result : Pass
- Duty Cycle : > 98 %

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	MEASURED VALUE (dBm)	LIMIT (dBm)	MARGIN (dB)
5 150 ~ 5 250	Low	5 190.00	12.24	24.00	11.76
	High	5 230.00	11.83	24.00	12.17
5 250 ~ 5 350	Low	5 270.00	11.37	24.00	12.63
	High	5 310.00	10.84	24.00	13.16
5 470 ~ 5 725	Low	5 510.00	11.73	24.00	12.27
	Middle	5 550.00	10.54	24.00	13.46
	High	5 670.00	11.21	24.00	12.79
5 725 ~ 5 850	Low	5 755.00	11.53	30.00	18.47
	High	5 795.00	11.16	30.00	18.84

Remark : Margin = Limit – Measured Value (=Power Sensor Reading + Cable Loss)

9.6.3 Test data for Multiple Transmit

- . Test Result : Pass

- . Duty Cycle : > 98 %

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	MEASURED VALUE (dBm)	LIMIT (dBm)	MARGIN (dB)
5 150 ~ 5 250	Low	5 190.00	16.04	24.00	7.96
	High	5 230.00	15.97	24.00	8.03
5 250 ~ 5 350	Low	5 270.00	15.42	24.00	8.58
	High	5 310.00	15.22	24.00	8.78
5 470 ~ 5 725	Low	5 510.00	15.09	24.00	8.91
	Middle	5 550.00	14.39	24.00	9.61
	High	5 670.00	14.68	24.00	9.32
5 725 ~ 5 850	Low	5 755.00	14.76	30.00	15.24
	High	5 795.00	14.72	30.00	15.28

Remark 1: Margin = Limit – Measured Value (=Power Sensor Reading + Cable Loss)

Remark 2: Calculated Output Power= $10\log(10^{(\text{Antenna0 Output Power}/10)} + 10^{(\text{Antenna1 Output Power}/10)})$

9.6.4 Test data for Staddle Channel_Antenna 0

- . Test Result : Pass

FREQUENCY RANGE (MHz)	FREQUENCY (MHz)	MEASURED VALUE (dBm)	LIMIT (dBm)	MARGIN (dB)
5 470 ~ 5 725	5 710.00	11.61	24.00	12.39
5 725 ~ 5 825	5 710.00	-0.48	30.00	30.48

9.6.5 Test data for Staddle Channel_Antenna 1

- . Test Result : Pass

FREQUENCY RANGE (MHz)	FREQUENCY (MHz)	MEASURED VALUE (dBm)	LIMIT (dBm)	MARGIN (dB)
5 470 ~ 5 725	5 710.00	13.53	24.00	10.47
5 725 ~ 5 825	5 710.00	1.25	30.00	28.75

9.6.6 Test data for Staddle Channel_Multiple Transmit

- . Test Result : Pass

FREQUENCY RANGE (MHz)	FREQUENCY (MHz)	MEASURED VALUE (dBm)	LIMIT (dBm)	MARGIN (dB)
5 470 ~ 5 725	5 710.00	15.69	24.00	8.31
5 725 ~ 5 825	5 710.00	3.48	30.00	26.52

Remark 1 : Margin = Limit – Measured Value (=Receiver Reading + Cable Loss)

Remark 2 : Calculated Output Power= $10\log(10^{(\text{Antenna1 Output Power}/10)} + 10^{(\text{Antenna2 Output Power}/10)})$

9.7 Test data for 802.11ac_HT80 RLAN Mode

9.7.1 Test data for Antenna 0

- Test Result : Pass
- Duty Cycle : > 98 %

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	MEASURED VALUE (dBm)	LIMIT (dBm)	MARGIN (dB)
5 150 ~ 5 250	Low	5 210.00	13.95	24.00	10.05
5 250 ~ 5 350	Low	5 290.00	12.46	24.00	11.54
5 470 ~ 5 725	Low	5 530.00	10.77	24.00	13.23
5 725 ~ 5 850	Low	5 775.00	11.41	30.00	18.59

Remark : Margin = Limit – Measured Value (=Power Sensor Reading + Cable Loss)

9.7.2 Test data for Antenna 1

- Test Result : Pass
- Duty Cycle : > 98 %

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	MEASURED VALUE (dBm)	LIMIT (dBm)	MARGIN (dB)
5 150 ~ 5 250	Low	5 210.00	11.15	24.00	12.85
5 250 ~ 5 350	Low	5 290.00	10.71	24.00	13.29
5 470 ~ 5 725	Low	5 530.00	8.73	24.00	15.27
5 725 ~ 5 850	Low	5 775.00	10.94	30.00	19.06

Remark : Margin = Limit – Measured Value (=Power Sensor Reading + Cable Loss)

9.7.3 Test data for Multiple Transmit

- Test Result : Pass
- Duty Cycle : > 98 %

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	MEASURED VALUE (dBm)	LIMIT (dBm)	MARGIN (dB)
5 150 ~ 5 250	Low	5 210.00	15.78	24.00	8.22
5 250 ~ 5 350	Low	5 290.00	14.68	24.00	9.32
5 470 ~ 5 725	Low	5 530.00	12.88	24.00	11.12
5 725 ~ 5 850	Low	5 775.00	14.19	30.00	15.81

Remark 1: Margin = Limit – Measured Value (=Power Sensor Reading + Cable Loss)

Remark 2: Calculated Output Power= $10\log(10^{(\text{Antenna0 Output Power}/10)} + 10^{(\text{Antenna1 Output Power}/10)})$

9.7.4 Test data for Staddle Channel_Antenna 0

- . Test Result : Pass

FREQUENCY RANGE (MHz)	FREQUENCY (MHz)	MEASURED VALUE (dBm)	LIMIT (dBm)	MARGIN (dB)
5 470 ~ 5 725	5 690.00	11.90	24.00	12.10
5 725 ~ 5 825	5 690.00	-2.93	30.00	32.93

9.7.5 Test data for Staddle Channel_Antenna 1

- . Test Result : Pass

FREQUENCY RANGE (MHz)	FREQUENCY (MHz)	MEASURED VALUE (dBm)	LIMIT (dBm)	MARGIN (dB)
5 470 ~ 5 725	5 690.00	12.55	24.00	11.45
5 725 ~ 5 825	5 690.00	-1.99	30.00	31.99

9.7.6 Test data for Staddle Channel_Multiple Transmit

- . Test Result : Pass

FREQUENCY RANGE (MHz)	FREQUENCY (MHz)	MEASURED VALUE (dBm)	LIMIT (dBm)	MARGIN (dB)
5 470 ~ 5 725	5 690.00	15.25	24.00	8.75
5 725 ~ 5 825	5 690.00	0.58	30.00	29.42

Remark 1 : Margin = Limit – Measured Value (=Receiver Reading + Cable Loss)

Remark 2 : Calculated Output Power= $10\log(10^{(\text{Antenna1 Output Power}/10)} + 10^{(\text{Antenna2 Output Power}/10)})$