


ELECTROMAGNETIC EMISSION COMPLIANCE REPORT FOR LOW-POWER, NON-LICENSED TRANSMITTER

Test Report No. : OT-209-RWD-065
Reception No. : 2008003233
Applicant : Samsung Electronics Co Ltd
Address : 19 Chapin Rd., Building D, Pine Brook, New Jersey, 07058, United States
Manufacturer : Samsung Electronics Co Ltd
Address : 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do 16677, Korea
Type of Equipment : Wi-Fi/BT Transceiver
FCC ID. : A3LWCA732M
Model Name : WCA732M
Serial number : N/A
Total page of Report : 284 pages (including this page)
Date of Incoming : August 20, 2020
Date of issue : September 21, 2020

SUMMARY

The equipment complies with the regulation; *FCC PART 15 SUBPART E Section 15.407*
 This test report only contains the result of a single test of the sample supplied for the examination.
 It is not a generally valid assessment of the features of the respective products of the mass-production.



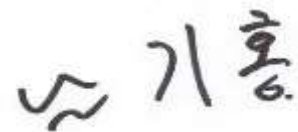

Tested by
 Ju Yun Park / Assistant Manager
 ONETECH Corp.

Reviewed by
 Tae-Ho, Kim / Senior Manager
 ONETECH Corp.

Approved by
 Ki-Hong, Nam / General Manager
 ONETECH Corp.

CONTENTS

	PAGE
1. VERIFICATION OF COMPLIANCE	9
2. TEST SUMMARY.....	10
2.1 TEST ITEMS AND RESULTS	10
2.2 ADDITIONS, DEVIATIONS, EXCLUSIONS FROM STANDARDS.....	10
2.3 RELATED SUBMITTAL(S) / GRANT(S)	10
2.4 PURPOSE OF THE TEST	10
2.5 TEST METHODOLOGY.....	10
2.6 TEST FACILITY.....	10
3. GENERAL INFORMATION.....	11
3.1 PRODUCT DESCRIPTION.....	11
3.2 ALTERNATIVE TYPE(S)/MODEL(S); ALSO COVERED BY THIS TEST REPORT.	16
4. EUT MODIFICATIONS.....	16
5. SYSTEM TEST CONFIGURATION	17
5.1 JUSTIFICATION.....	17
5.2 PERIPHERAL EQUIPMENT	17
5.3 MODE OF OPERATION DURING THE TEST	18
5.4 CONFIGURATION OF TEST SYSTEM.....	49
5.5 ANTENNA REQUIREMENT	49
6. PRELIMINARY TEST	49
6.1 AC POWER LINE CONDUCTED EMISSIONS TESTS.....	49
6.2 GENERAL RADIATED EMISSIONS TESTS	49
7. MIMIMUM 26 DB BANDWIDTH	50
7.1 OPERATING ENVIRONMENT	50
7.2 TEST SET-UP	50
7.3 TEST DATE	50
7.4 TEST DATA FOR 802.11A RLAN MODE.....	51
7.4.1 Test data for Antenna 0	51
7.4.2 Test data for Antenna 1	60
7.4.3 Test data for Staddle Channel_Antenna 0	69
7.4.4 Test data for Staddle Channel_Antenna 1	70
7.5 TEST DATA FOR 802.11N_HT20 RLAN MODE.....	71
7.5.1 Test data for Antenna 0	71

7.5.2 Test data for Antenna 1	80
7.4.3 Test data for Staddle Channel_Antenna 0	89
7.4.4 Test data for Staddle Channel_Antenna 1	90
7.6 TEST DATA FOR 802.11N_HT40 RLAN MODE	91
7.6.1 Test data for Antenna 0	91
7.6.2 Test data for Antenna 1	97
7.6.3 Test data for Staddle Channel_Antenna 0	103
7.6.4 Test data for Staddle Channel_Antenna 1	104
7.7 TEST DATA FOR 802.11AC_VHT80 RLAN MODE.....	105
7.7.1 Test data for Antenna 0	105
7.7.2 Test data for Antenna 1	108
7.7.3 Test data for Staddle Channel_Antenna 0	111
7.7.4 Test data for Staddle Channel_Antenna 1	112
8. 6 DB BANDWIDTH	113
8.1 OPERATING ENVIRONMENT	113
8.2 TEST SET-UP	113
8.3 TEST DATE	113
8.4 TEST DATA FOR 802.11A RLAN MODE.....	114
8.4.1 Test data for Antenna 0	114
8.4.2 Test data for Antenna 1	116
8.5 TEST DATA FOR 802.11N_HT20 RLAN MODE	118
8.5.1 Test data for Antenna 0	118
8.5.2 Test data for Antenna 1	120
8.6 TEST DATA FOR 802.11N_HT40 RLAN MODE	122
8.6.1 Test data for Antenna 0	122
8.6.2 Test data for Antenna 1	124
8.7 TEST DATA FOR 802.11AC_VHT80 RLAN MODE.....	126
8.7.1 Test data for Antenna 0	126
8.7.2 Test data for Antenna 1	127
9. MAXIMUM CONDUCTED OUTPUT POWER.....	128
9.1 OPERATING ENVIRONMENT	128
9.2 TEST SET-UP	128
9.3 TEST DATE	128
9.4 TEST DATA FOR 802.11A RLAN MODE.....	129
9.4.1 Test data for Antenna 0	129
9.4.2 Test data for Antenna 1	130
9.4.3 Test data for Multiple Transmit	131

9.4.4 Test data for Staddle Channel_Antenna 0 132

9.4.5 Test data for Staddle Channel_Antenna 1 132

9.4.6 Test data for Staddle Channel_Multiple Transmit 132

9.5 TEST DATA FOR 802.11N_HT20 RLAN MODE 133

9.5.1 Test data for Antenna 0 133

9.5.2 Test data for Antenna 1 134

9.5.3 Test data for Multiple Transmit 135

9.5.4 Test data for Staddle Channel_Antenna 0 136

9.5.5 Test data for Staddle Channel_Antenna 1 136

9.5.6 Test data for Staddle Channel_Multiple Transmit 136

9.6 TEST DATA FOR 802.11N_HT40 RLAN MODE 137

9.6.1 Test data for Antenna 0 137

9.6.2 Test data for Antenna 1 137

9.6.3 Test data for Multiple Transmit 138

9.6.4 Test data for Staddle Channel_Antenna 0 139

9.6.5 Test data for Staddle Channel_Antenna 1 139

9.6.6 Test data for Staddle Channel_Multiple Transmit 139

9.7 TEST DATA FOR 802.11AC_HT80 RLAN MODE 140

9.7.1 Test data for Antenna 0 140

9.7.2 Test data for Antenna 1 140

9.7.3 Test data for Multiple Transmit 141

9.7.4 Test data for Staddle Channel_Antenna 0 142

9.7.5 Test data for Staddle Channel_Antenna 1 142

9.7.6 Test data for Staddle Channel_Multiple Transmit 142

10. PEAK POWER SPECTRUL DENSITY 143

10.1 OPERATING ENVIRONMENT 143

10.2 TEST SET-UP 143

10.3 TEST DATE 143

10.4 TEST DATA FOR 802.11A RLAN MODE 144

10.4.1 Test data for Antenna 0 144

10.4.2 Test data for Antenna 1 153

10.4.3 Test data for Multiple Transmit 162

10.4.4 Test data for Staddle Channel_Antenna 0 163

10.4.5 Test data for Staddle Channel_Antenna 1 165

10.4.6 Test data for Staddle Channel_Multiple Transmit 167

10.5 TEST DATA FOR 802.11N_HT20 RLAN MODE 168

10.5.1 Test data for Antenna 0 168

10.5.2 Test data for Antenna 1	177
10.5.3 Test data for Multiple Transmit	186
10.5.4 Test data for Staddle Channel_Antenna 0	187
10.5.5 Test data for Staddle Channel_Antenna 1	189
10.5.6 Test data for Staddle Channel_Multiple Transmit	191
10.6 TEST DATA FOR 802.11N_HT40 RLAN MODE.....	192
10.6.1 Test data for Antenna 0	192
10.6.2 Test data for Antenna 1	198
10.6.3 Test data for Multiple Transmit	204
10.6.4 Test data for Staddle Channel_Antenna 0	205
10.6.5 Test data for Staddle Channel_Antenna 1	207
10.6.6 Test data for Staddle Channel_Multiple Transmit	209
10.7 TEST DATA FOR 802.11AC_HT80 RLAN MODE.....	210
10.7.1 Test data for Antenna 0	210
10.7.2 Test data for Antenna 1	213
10.7.3 Test data for Multiple Transmit	216
10.7.4 Test data for Staddle Channel_Antenna 0	217
10.7.5 Test data for Staddle Channel_Antenna 1	219
10.7.6 Test data for Staddle Channel_Multiple Transmit	221
11. FREQUENCY STABILITY WITH TEMPERATURE VARIATION.....	222
11.1 OPERATING ENVIRONMENT	222
11.2 TEST SET-UP	222
11.3 TEST DATE	222
11.4 TEST DATA FOR U-NII-1	223
11.5 TEST DATA FOR U-NII-2A.....	224
11.6 TEST DATA FOR U-NII-2C.....	225
11.7 TEST DATA FOR U-NII-3	226
12. FREQUENCY STABILITY WITH VOLTAGE VARIATION.....	227
12.1 OPERATING ENVIRONMENT	227
12.2 TEST SET-UP	227
12.3 TEST DATE	227
12.4 TEST DATA FOR U-NII-1	228
12.5 TEST DATA FOR U-NII-2A.....	228
12.6 TEST DATA FOR U-NII-2C.....	229
12.7 TEST DATA FOR U-NII-3	229
13. RADIATED SPURIOUS EMISSIONS	230
13.1 OPERATING ENVIRONMENT	230


13.2 TEST SET-UP FOR CONDUCTED MEASUREMENT	230
13.3 TEST DATE	230
13.4 TEST DATA FOR BELOW 30 MHZ	230
13.5 TEST DATA FOR 30 MHZ ~ 960 MHZ	231
<i>13.5.1 Test data for WLAN 5 GHz</i>	<i>231</i>
<i>13.5.2 Test data for Intermodulation Mode(Bluetooth LE + WLAN 2.4 GHz + WLAN 5 GHz)</i>	<i>232</i>
<i>13.5.3 Test data for Intermodulation Mode(Bluetooth + WLAN 2.4 GHz + WLAN 5 GHz)</i>	<i>233</i>
13.6 Test data for Above 1 GHz	234
13.6.1 Test data for Frequency UNII I	234
13.6.2 Test data for Frequency UNII 2A	237
13.6.3 Test data for Frequency UNII 2C	241
13.6.4 Test data for Frequency UNII 3	245
14. RADIATED RESTRICTED BAND EDGE MEASUREMENTS	249
14.1 OPERATING ENVIRONMENT	249
14.2 TEST SET-UP FOR CONDUCTED MEASUREMENT	249
14.3 TEST DATE	249
14.4 TEST DATA FOR FREQUENCY UNII I	250
<i>14.4.1 Test data for 802.11a RLAN Mode</i>	<i>250</i>
<i>14.4.2 Test data for 802.11n_HT20 RLAN Mode</i>	<i>250</i>
<i>14.4.3 Test data for 802.11n_HT40 RLAN Mode</i>	<i>251</i>
<i>14.4.4 Test data for 802.11ac_HT80 RLAN Mode</i>	<i>251</i>
14.5 TEST DATA FOR FREQUENCY UNII 2A	252
<i>14.5.1 Test data for 802.11a RLAN Mode</i>	<i>252</i>
<i>14.5.2 Test data for 802.11n_HT20 RLAN Mode</i>	<i>252</i>
<i>14.5.3 Test data for 802.11n_HT40 RLAN Mode</i>	<i>253</i>
<i>14.5.4 Test data for 802.11ac_HT80 RLAN Mode</i>	<i>253</i>
14.6 TEST DATA FOR FREQUENCY UNII 2C	254
<i>14.6.1 Test data for 802.11a RLAN Mode</i>	<i>254</i>
<i>14.6.2 Test data for 802.11n_HT20 RLAN Mode</i>	<i>254</i>
<i>14.6.3 Test data for 802.11n_HT40 RLAN Mode</i>	<i>255</i>
<i>14.6.4 Test data for 802.11ac_HT80 RLAN Mode</i>	<i>255</i>
14.7 TEST DATA FOR FREQUENCY U-NII-3	256
<i>14.7.1 Test data for 802.11a RLAN Mode</i>	<i>256</i>
<i>14.7.2 Test data for 802.11n_HT20 RLAN Mode</i>	<i>258</i>
<i>14.7.3 Test data for 802.11n_HT40 RLAN Mode</i>	<i>260</i>
<i>14.7.4 Test data for 802.11ac_HT80 RLAN Mode</i>	<i>262</i>
14.7.5 U-NII-3 Emission Limits	264

15. CONDUCTED EMISSION TEST	265
15.1 OPERATING ENVIRONMENT	265
15.2 TEST SET-UP	265
15.3 TEST DATE	265
15.4 TEST DATA FOR WLAN 5 GHZ	266
15.5 TEST DATA FOR INTERMODULATION MODE(BLUETOOTH LE + WLAN 2.4 GHZ + WLAN 5 GHZ)	268
15.6 TEST DATA FOR INTERMODULATION MODE(BLUETOOTH + WLAN 2.4 GHZ + WLAN 5 GHZ)	270
16. DYNAMIC FREQUENCY SELECTION (DFS)	272
16.1 OPERATING ENVIRONMENT	272
16.2 TEST SET-UPS	272
16.3 DFS TEST SIGNALS	274
16.4 TECHNICAL REQUIREMENT SPECIFICATION	275
16.5 TEST DATE	275
16.6 TEST DATA	276
16.6.1 UNII 2A	276
16.6.1.1 Plot of Radar waveform type 0	276
16.6.1.2 No traffic signal(master signal)	277
16.6.1.3 Client(EUT) Data Traffic Signal	278
16.6.1.4 Channel move and Channel Closing transmission time	279
16.6.2 UNII 3	280
16.6.2.1 Plot of Radar waveform type 1	280
16.6.2.2 No traffic signal(master signal)	281
16.6.2.3 Client(EUT) Data Traffic Signal	282
16.6.2.4 Channel move and Channel Closing transmission time	283
17. LIST OF TEST EQUIPMENT	284

Revision History

Rev. No.	Issue Report No.	Issued Date	Revisions	Section Affected
0	OT-209-RWD-065	September 21, 2020	Initial Release	All

1. VERIFICATION OF COMPLIANCE

Applicant : Samsung Electronics Co Ltd
 Address : 19 Chapin Rd., Building D, Pine Brook, New Jersey, 07058, United States
 Contact Person : Youngjoong Noh / Principal Engineer
 Telephone No. : +82-31-277-0598
 FCC ID : A3LWCA732M
 Model Name : WCA732M
 Brand Name : 
 Serial Number : N/A
 Date : September 21, 2020

EQUIPMENT CLASS	Unlicensed National Information infrastructure(UNII)
E.U.T. DESCRIPTION	Modular Transmitter, Wi-Fi/BT Transceiver
THIS REPORT CONCERNS	Original Grant
MEASUREMENT PROCEDURES	ANSI C63.10: 2013
TYPE OF EQUIPMENT TESTED	Pre-Production
KIND OF EQUIPMENT AUTHORIZATION REQUESTED	Certification
EQUIPMENT WILL BE OPERATED UNDER FCC RULES PART(S)	FCC PART 15 SUBPART E Section 15.407 789033 D02 General UNII Test Procedures New Rules v02r01
Modifications on the Equipment to Achieve Compliance	None
Final Test was Conducted On	3 m, Semi Anechoic Chamber

-. The above equipment was tested by ONETECH Corp. for compliance with the requirement set forth in the FCC Rules and Regulations. This said equipment in the configuration described in this report, shows the maximum emission levels emanating from equipment are within the compliance requirements.

2. TEST SUMMARY

2.1 Test items and results

SECTION	TEST ITEMS	RESULTS
15.407(a)	26 dB Bandwidth	PASS
15.407(a)	Maximum Conducted Output Power	Met the Limit / PASS
15.407(a)	Peak Power Spectral Density	Met the Limit / PASS
15.407(a)	Peak Excursion	Met the Limit / PASS
15.407(g)	Frequency Stability	Met the Limit / PASS
15.407(b)	Undesirable Emissions	Met the Limit / PASS
15.205, 15.407(b)	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Met the Limit / PASS
15.207	AC Conducted Emissions 150 kHz-30 MHz	Met the Limit / PASS
15.407(h)	Dynamic frequency Selection	Met the Limit / PASS

2.2 Additions, deviations, exclusions from standards

No additions, deviations or exclusions have been made from standard.

2.3 Related Submittal(s) / Grant(s)

Original submittal only

2.4 Purpose of the test

To determine whether the equipment under test fulfills the requirements of the regulation stated in FCC PART 15 SUBPART E Section 15.407

2.5 Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10: 2013. Radiated testing was performed at a distance of 3 m from EUT to the antenna.

2.6 Test Facility

The Onetech Corp. has been designated to perform equipment testing in compliance with ISO/IEC 17025.

The Electromagnetic compatibility measurement facilities are located at 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea.

-. Site Filing:

VCCI (Voluntary Control Council for Interference) – Registration No. R-4112/ C-14617/ G-10666/ T-11842

ISED (Innovation, Science and Economic Development Canada) – Registration No. Site# 3736A-3

KOLAS (Korea Laboratory Accreditation Scheme) - Accreditation NO. KT085

FCC (Federal Communications Commission) - Accreditation No. KR0013

RRA (Radio Research Agency) – Designation No. KR0013

3. GENERAL INFORMATION

3.1 Product Description

The Samsung Electronics Co Ltd, Model WCA732M (referred to as the EUT in this report) is a Wi-Fi/BT Transceiver. The product specification described herein was obtained from product data sheet or user’s manual.

DEVICE TYPE	Wi-Fi/BT Transceiver		
Temperature Range	-20 °C ~ 50 °C		
OPERATING FREQUENCY	Bluetooth LE	2 402 MHz ~ 2 480 MHz	
	Bluetooth	2 402 MHz ~ 2 480 MHz	
	WLAN 2.4 GHz	2 412 MHz ~ 2 472 MHz (802.11b/g/n(HT20))	
		2 422 MHz ~ 2 462 MHz (802.11n(HT40))	
	5 150 MHz ~ 5 250 MHz Band	5 180 MHz ~ 5 240 MHz (802.11a/n(HT20)/ac(VHT20))	
		5 190 MHz ~ 5 230 MHz (802.11n(HT40)/ac(VHT40))	
		5 210 MHz (802.11ac(VHT80))	
	5 250 MHz ~ 5 350 MHz Band	5 260 MHz ~ 5 320 MHz (802.11a/n(HT20)/ac(VHT20))	
		5 270 MHz ~ 5 310 MHz (802.11n(HT40)/ac(VHT40))	
		5 290 MHz (802.11ac(VHT80))	
	5 470 MHz ~ 5 725 MHz Band	5 500 MHz ~ 5 700 MHz (802.11a/n(HT20)/ac(VHT20))	
		5 510 MHz ~ 5 670 MHz (802.11n(HT40)/ac(VHT40))	
		5 530 MHz (802.11ac(VHT80))	
	5 725 MHz ~ 5 850 MHz Band	5 745 MHz ~ 5 825 MHz (802.11a/n(HT20)/ac(VHT20))	
5 755 MHz ~ 5 795 MHz (802.11n(HT40)/ac(VHT40))			
5 775 MHz (802.11ac(VHT80))			
MODULATION TYPE	Bluetooth LE	GFSK for 1 Mbps / 2 Mbps	
	Bluetooth	GFSK for 1Mbps, $\pi/4$ -DQPSK for 2Mbps, 8-DPSK for 3Mbps	
	WLAN 2.4 GHz	802.11b: DSSS Modulation(DBPSK/DQPSK/CCK)	
		802.11g/n(HT20)/n(HT40): OFDM Modulation(BPSK/QPSK/16QAM/64QAM)	
	WLAN 5 GHz	802.11a/n(HT20)/n(HT40)/ac(VHT80): OFDM Modulation(BPSK/QPSK/16QAM/64QAM)	

RF OUTPUT POWER	Bluetooth LE	1 Mbps	9.85 dBm
		2 Mbps	9.82 dBm
	Bluetooth	1 Mbps	9.93 dBm
		2 Mbps	9.60 dBm
		3 Mbps	9.67 dBm
	WLAN 2.4 GHz	Antenna 0	18.65 dBm(802.11b)
			15.81 dBm(802.11g)
			15.71 dBm(802.11n_HT20)
			13.39 dBm(802.11n_HT40)
		Antenna 1	18.55 dBm(802.11b)
			15.40 dBm(802.11g)
Multiple Antenna	15.14 dBm(802.11n_HT20)		
	13.25 dBm(802.11n_HT40)		
	18.41 dBm(802.11g)		
		18.21 dBm(802.11n_HT20)	
		16.31 dBm(802.11n_HT40)	

RF OUTPUT POWER	5 150 MHz ~ 5 250 MHz Band	Antenna 0	12.21 dBm(802.11a) 11.95 dBm(802.11n_HT20) 10.15 dBm(802.11n_HT40) 9.97 dBm(802.11ac_VHT80)
		Antenna 1	12.42 dBm(802.11a) 12.11 dBm(802.11n_HT20) 10.14 dBm(802.11n_HT40) 9.84 dBm(802.11ac_VHT80)
		Multiple Antenna	15.33 dBm(802.11a) 15.01 dBm(802.11n_HT20) 13.16 dBm(802.11n_HT40) 12.92 dBm(802.11ac_VHT80)
	5 250 MHz ~ 5 350 MHz Band	Antenna 0	13.65 dBm(802.11a) 13.57 dBm(802.11n_HT20) 11.60 dBm(802.11n_HT40) 11.17 dBm(802.11ac_VHT80)
		Antenna 1	12.18 dBm(802.11a) 11.88 dBm(802.11n_HT20) 10.35 dBm(802.11n_HT40) 9.71 dBm(802.11ac_VHT80)
		Multiple Antenna	15.83 dBm(802.11a) 15.64 dBm(802.11n_HT20) 13.81 dBm(802.11n_HT40) 13.51 dBm(802.11ac_VHT80)

RF OUTPUT POWER	5 470 MHz ~ 5 725 MHz Band	Antenna 0	14.11 dBm(802.11a) 13.95 dBm(802.11n_HT20) 12.16 dBm(802.11n_HT40) 11.80 dBm(802.11ac_VHT80)
		Antenna 0_Straddle	12.10 dBm(802.11a) 12.27 dBm(802.11n_HT20) 10.69 dBm(802.11n_HT40) 11.65 dBm(802.11ac_VHT80)
		Antenna 1	11.16 dBm(802.11a) 10.89 dBm(802.11n_HT20) 11.38 dBm(802.11n_HT40) 10.95 dBm(802.11ac_VHT80)
		Antenna 1_Straddle	13.12 dBm(802.11a) 13.00 dBm(802.11n_HT20) 10.79 dBm(802.11n_HT40) 12.23 dBm(802.11ac_VHT80)
		Multiple Antenna	15.89 dBm(802.11a) 15.69 dBm(802.11n_HT20) 14.66 dBm(802.11n_HT40) 14.41 dBm(802.11ac_VHT80)
		Multiple Antenna _Straddle	15.65 dBm(802.11a) 15.66 dBm(802.11n_HT20) 13.75 dBm(802.11n_HT40) 14.96 dBm(802.11ac_VHT80)

RF OUTPUT POWER	5 725 MHz ~ 5 850 MHz Band	Antenna 0	13.21 dBm(802.11a) 12.93 dBm(802.11n_HT20) 11.03 dBm(802.11n_HT40) 10.95 dBm(802.11ac_VHT80)
		Antenna 0_Straddle	4.04 dBm(802.11a) 4.66 dBm(802.11n_HT20) -1.44 dBm(802.11n_HT40) -3.22 dBm(802.11ac_VHT80)
		Antenna 1	10.11 dBm(802.11a) 9.58 dBm(802.11n_HT20) 11.07 dBm(802.11n_HT40) 10.91 dBm(802.11ac_VHT80)
		Antenna 1_Straddle	5.07 dBm(802.11a) 5.45 dBm(802.11n_HT20) -1.40 dBm(802.11n_HT40) -2.70 dBm(802.11ac_VHT80)
		Multiple Antenna	14.88 dBm(802.11a) 14.58 dBm(802.11n_HT20) 14.06 dBm(802.11n_HT40) 13.94 dBm(802.11ac_VHT80)
		Multiple Antenna _Straddle	7.60 dBm(802.11a) 8.08 dBm(802.11n_HT20) 1.59 dBm(802.11n_HT40) 0.06 dBm(802.11ac_VHT80)

ANTENNA TYPE	Chip Antenna			
ANTENNA GAIN	Bluetooth LE	0.28 dBi		
	Bluetooth	0.28 dBi		
	WLAN 2.4 GHz	Antenna 0	1.80 dBi	
		Antenna 1	1.83 dBi	
		Multiple Antenna	4.83 dBi	
	5 150 MHz ~ 5 250 MHz Band	Antenna 0	-0.54 dBi	
		Antenna 1	-3.09 dBi	
		Multiple Antenna	1.38 dBi	
	5 250 MHz ~ 5 350 MHz Band	Antenna 0	0.00 dBi	
		Antenna 1	-1.42 dBi	
		Multiple Antenna	2.36 dBi	
	5 470 MHz ~ 5 725 MHz Band	Antenna 0	2.34 dBi	
		Antenna 1	0.37 dBi	
		Multiple Antenna	4.48 dBi	
	5 725 MHz ~ 5 850 MHz Band	Antenna 0	-0.30 dBi	
		Antenna 1	-1.37 dBi	
		Multiple Antenna	2.21 dBi	
	List of each Osc. or crystal Freq.(Freq. >= 1 MHz)		40 MHz	

3.2 Alternative type(s)/model(s); also covered by this test report.

-. None

4. EUT MODIFICATIONS

-. None

5. SYSTEM TEST CONFIGURATION

5.1 Justification

This device was configured for testing in a typical way as a normal customer is supposed to be used. During the test, the following components were installed inside of the EUT.

DEVICE TYPE	MANUFACTURER	MODEL/PART NUMBER	FCC ID
Main Board	Samsung Electronics Co Ltd	WCA732M	N/A

5.2 Peripheral equipment

Defined as equipment needed for correct operation of the EUT, but not considered as tested:

Model	Manufacturer	Description	Connected to
WCA732M	Samsung Electronics Co Ltd	Wi-Fi/BT Transceiver (EUT)	
HP Probook	HP	Notebook PC	EUT
PPP009L-E	LIE-ON TECHNOLOGY (CHANGZHOU)CO.,LTD.	AC Adapter	

5.3 Mode of operation during the test

For the testing, software used to control the EUT for staying in continuous transmitting mode is programmed.

-. Frequency / Channel Operations

		Channel	Frequency
802.11a 802.11n 802.11ac(20 MHz)	Band 1	36	5 180
		44	5 220
		48	5 240
	Band 2A	52	5 260
		60	5 300
		64	5 320
	Band 2C	100	5 500
		116	5 580
		140	5 700
	Straddle	144	5 720
	Band 3	149	5 745
		157	5 785
165		5 825	
802.11n 802.11ac(40 MHz)	Band 1	38	5 190
		46	5 230
	Band 2A	54	5 270
		62	5 310
	Band 2C	102	5 510
		110	5 550
		134	5 670
	Straddle	142	5 710
	Band 3	151	5 755
5 795		5 795	
802.11ac(80 MHz)	Band 1	42	5 210
	Band 2A	58	5 290
	Band 2C	106	5 530
	Straddle	138	5 690
	Band 3	155	5 775

UNII 1

Modulation	DATA RATE	OUTPUT POWER[dBm]	
		Antenna 0	Antenna 1
802.11 a (Middle Channel)	6 Mbps	12.04	12.41
	9 Mbps	12.02	12.20
	12 Mbps	11.91	11.97
	18 Mbps	11.82	11.89
	24 Mbps	10.87	10.72
	36 Mbps	10.84	10.66
	48 Mbps	9.99	9.69
	54 Mbps	9.11	8.68
HT 20 (Middle Channel)	6.5 Mbps	11.95	12.05
	13 Mbps	11.78	11.91
	19.5 Mbps	11.72	11.87
	26 Mbps	11.59	11.80
	39 Mbps	11.52	11.69
	52 Mbps	10.64	10.77
	58.5 Mbps	8.84	8.88
	65 Mbps	8.81	8.77
HT 40 (Low Channel)	13.5 Mbps	10.15	10.14
	27 Mbps	10.02	10.03
	40.5 Mbps	9.90	9.95
	54 Mbps	9.83	9.87
	81 Mbps	9.76	9.76
	108 Mbps	8.83	8.85
	121.5 Mbps	7.07	7.15
	135 Mbps	7.03	7.11

VHT80 (Middle Channel)	29.3 Mbps	9.97	9.84
	58.5 Mbps	9.93	9.71
	87.8 Mbps	9.87	9.65
	117 Mbps	9.85	9.57
	175.5 Mbps	9.83	9.52
	234 Mbps	9.25	8.61
	263.3 Mbps	9.15	8.55
	292.5 Mbps	7.39	6.85
	351 Mbps	7.33	6.74
	390 Mbps	7.30	6.71

- The worse case data rate for each modulation is determined 6 Mbps(Ant.0/Ant.1) for IEEE 802.11a, 6.5 Mbps(Ant.0/Ant.1) for HT20, 13.5 Mbps(Ant.0/Ant.1) for HT40, 29.3 Mbps(Ant.0/Ant.1) for VHT80.
- To get a maximum emission levels from the EUT, the EUT was moved throughout the XY, XZ, and YZ planes and the worst case is “XY” axis.

UNII 2A

Modulation	DATA RATE	OUTPUT POWER[dBm]	
		Antenna 0	Antenna 1
802.11 a (Middle Channel)	6 Mbps	13.32	11.84
	9 Mbps	13.18	11.72
	12 Mbps	13.12	11.55
	18 Mbps	13.05	11.51
	24 Mbps	12.25	10.40
	36 Mbps	12.21	10.36
	48 Mbps	11.43	10.11
	54 Mbps	10.60	9.04
HT 20 (Middle Channel)	6.5 Mbps	13.48	11.52
	13 Mbps	13.08	11.35
	19.5 Mbps	12.99	11.25
	26 Mbps	12.91	11.19
	39 Mbps	12.88	11.11
	52 Mbps	12.13	10.18
	58.5 Mbps	10.32	8.53
	65 Mbps	10.30	8.46
HT 40 (Low Channel)	13.5 Mbps	10.28	10.35
	27 Mbps	10.25	10.15
	40.5 Mbps	10.07	10.11
	54 Mbps	9.94	10.01
	81 Mbps	9.77	9.94
	108 Mbps	8.94	9.12
	121.5 Mbps	6.92	7.35
	135 Mbps	6.86	7.24

VHT80 (Middle Channel)	29.3 Mbps	11.17	9.71
	58.5 Mbps	11.10	9.56
	87.8 Mbps	11.04	9.49
	117 Mbps	10.99	9.42
	175.5 Mbps	10.93	9.31
	234 Mbps	10.22	8.34
	263.3 Mbps	10.17	8.01
	292.5 Mbps	8.18	6.78
	351 Mbps	8.05	6.69
	390 Mbps	8.03	6.60

- The worse case data rate for each modulation is determined 6 Mbps(Ant.0/Ant.1) for IEEE 802.11a, 6.5 Mbps(Ant.0/Ant.1) for HT20, 13.5 Mbps(Ant.0/Ant.1) for HT40, 29.3 Mbps(Ant.0/Ant.1) for VHT80.
- To get a maximum emission levels from the EUT, the EUT was moved throughout the XY, XZ, and YZ planes and the worst case is “XY” axis.

UNII 2C

Modulation	DATA RATE	OUTPUT POWER[dBm]	
		Antenna 0	Antenna 1
802.11 a (Middle Channel)	6 Mbps	14.11	11.16
	9 Mbps	14.07	11.03
	12 Mbps	13.98	10.88
	18 Mbps	13.93	10.81
	24 Mbps	13.05	9.92
	36 Mbps	12.91	9.84
	48 Mbps	12.03	8.98
	54 Mbps	11.19	8.21
HT 20 (Middle Channel)	6.5 Mbps	13.95	10.89
	13 Mbps	13.88	10.78
	19.5 Mbps	13.81	10.73
	26 Mbps	13.77	10.66
	39 Mbps	13.72	10.56
	52 Mbps	12.80	9.73
	58.5 Mbps	11.08	8.21
	65 Mbps	10.98	8.04
HT 40 (Low Channel)	13.5 Mbps	12.16	11.08
	27 Mbps	11.97	10.88
	40.5 Mbps	11.90	10.66
	54 Mbps	11.84	10.60
	81 Mbps	11.76	10.48
	108 Mbps	10.95	9.54
	121.5 Mbps	9.81	7.95
	135 Mbps	9.56	7.84

VHT80 (Middle Channel)	29.3 Mbps	11.80	10.95
	58.5 Mbps	11.64	10.73
	87.8 Mbps	11.55	10.39
	117 Mbps	11.46	10.17
	175.5 Mbps	11.40	10.08
	234 Mbps	10.61	9.25
	263.3 Mbps	10.56	9.13
	292.5 Mbps	8.92	7.49
	351 Mbps	8.81	7.41
	390 Mbps	8.72	7.34

- The worse case data rate for each modulation is determined 6 Mbps(Ant.0/Ant.1) for IEEE 802.11a, 6.5 Mbps(Ant.0/Ant.1) for HT20, 13.5 Mbps(Ant.0/Ant.1) for HT40, 29.3 Mbps(Ant.0/Ant.1) for VHT80.
- To get a maximum emission levels from the EUT, the EUT was moved throughout the XY, XZ, and YZ planes and the worst case is “XY” axis.

UNII 3

Modulation	DATA RATE	OUTPUT POWER[dBm]	
		Antenna 0	Antenna 1
802.11 a (Middle Channel)	6 Mbps	13.14	10.04
	9 Mbps	12.96	9.89
	12 Mbps	12.87	9.70
	18 Mbps	12.81	9.61
	24 Mbps	11.85	8.68
	36 Mbps	11.78	8.59
	48 Mbps	10.92	7.63
	54 Mbps	10.02	6.69
HT 20 (Middle Channel)	6.5 Mbps	12.65	9.44
	13 Mbps	12.46	9.30
	19.5 Mbps	12.32	9.24
	26 Mbps	12.27	9.13
	39 Mbps	12.21	9.06
	52 Mbps	11.26	8.12
	58.5 Mbps	9.57	6.34
	65 Mbps	9.53	6.29
HT 40 (Low Channel)	13.5 Mbps	10.91	10.86
	27 Mbps	10.78	10.77
	40.5 Mbps	10.71	10.64
	54 Mbps	10.60	10.57
	81 Mbps	10.54	10.48
	108 Mbps	9.75	9.63
	121.5 Mbps	8.04	7.73
	135 Mbps	7.95	7.67

VHT80 (Middle Channel)	29.3 Mbps	10.95	10.91
	58.5 Mbps	10.80	10.71
	87.8 Mbps	10.72	10.60
	117 Mbps	10.50	10.51
	175.5 Mbps	10.43	10.43
	234 Mbps	9.49	9.61
	263.3 Mbps	9.44	9.51
	292.5 Mbps	7.86	7.93
	351 Mbps	7.75	7.77
	390 Mbps	7.69	7.73

- The worse case data rate for each modulation is determined 6 Mbps(Ant.0/Ant.1) for IEEE 802.11a, 6.5 Mbps(Ant.0/Ant.1) for HT20, 13.5 Mbps(Ant.0/Ant.1) for HT40, 29.3 Mbps(Ant.0/Ant.1) for VHT80.
- To get a maximum emission levels from the EUT, the EUT was moved throughout the XY, XZ, and YZ planes and the worst case is “XY” axis.

- Duty Cycle


	Band	Mode	Tx On Time [ms]	Tx Off Time [ms]	Duty Cycle [%]	Correction Factor [dB]
Antenna 0	UNII 1	802.11 a	-	-	100.00	-
		802.11 HT 20	-	-	100.00	-
		802.11 HT 40	-	-	100.00	-
		802.11 VHT 80	-	-	100.00	-
	UNII 2A	802.11 a	-	-	100.00	-
		802.11 HT 20	-	-	100.00	-
		802.11 HT 40	-	-	100.00	-
		802.11 VHT 80	-	-	100.00	-
	UNII 2C	802.11 a	-	-	100.00	-
		802.11 HT 20	-	-	100.00	-
		802.11 HT 40	-	-	100.00	-
		802.11 VHT 80	-	-	100.00	-
	UNII 3	802.11 a	-	-	100.00	-
		802.11 HT 20	-	-	100.00	-
		802.11 HT 40	-	-	100.00	-
		802.11 VHT 80	-	-	100.00	-
Antenna 1	UNII 1	802.11 a	-	-	100.00	-
		802.11 HT 20	-	-	100.00	-
		802.11 HT 40	-	-	100.00	-
		802.11 VHT 80	-	-	100.00	-
	UNII 2A	802.11 a	-	-	100.00	-
		802.11 HT 20	-	-	100.00	-
		802.11 HT 40	-	-	100.00	-
		802.11 VHT 80	-	-	100.00	-
	UNII 2C	802.11 a	-	-	100.00	-
		802.11 HT 20	-	-	100.00	-
		802.11 HT 40	-	-	100.00	-
		802.11 VHT 80	-	-	100.00	-
	UNII 3	802.11 a	-	-	100.00	-
		802.11 HT 20	-	-	100.00	-
		802.11 HT 40	-	-	100.00	-
		802.11 VHT 80	-	-	100.00	-

	Mode	Tx On Time [ms]	Tx Off Time [ms]	Duty Cycle [%]	Correction Factor [dB]
Staddle	802.11 a	-	-	100.00	-
	802.11 HT 20	-	-	100.00	-
	802.11 HT 40	-	-	100.00	-
	802.11 VHT 80	-	-	100.00	-


Note – Duty Cycle : (Tx On Time / (Tx On Time + Tx Off Time)) * 100

Correction Factor : 10 * Log(1 / (Duty Cycle / 100))


-. Test Plot

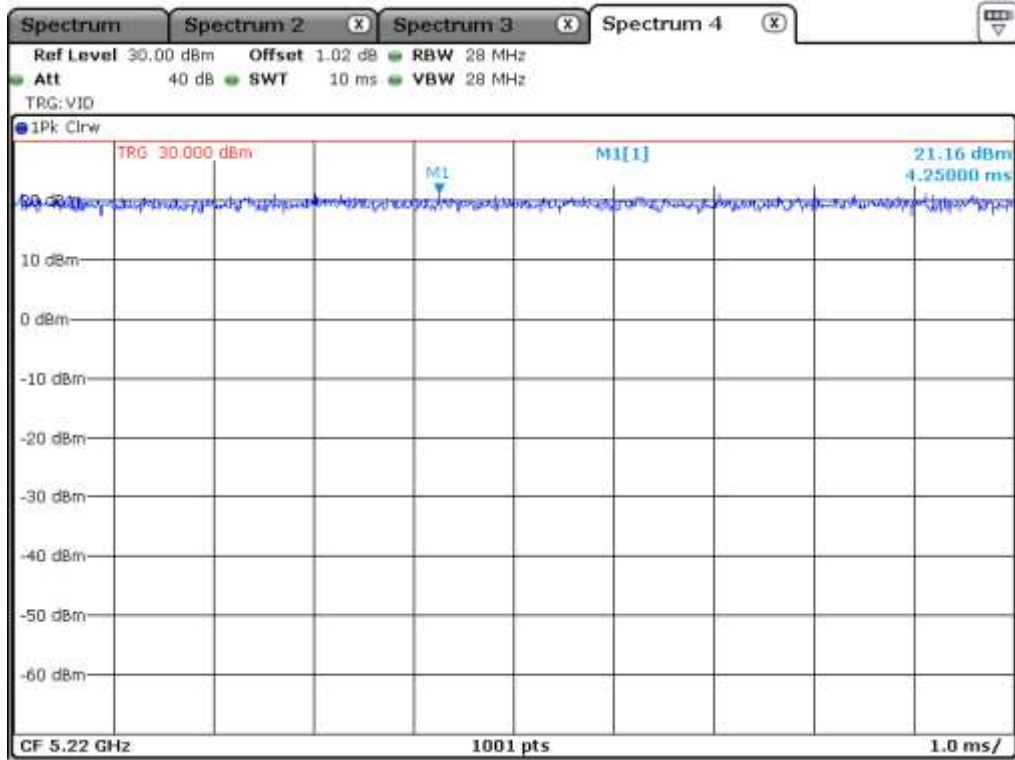


UNII 1_802.11 a_Antenna 0

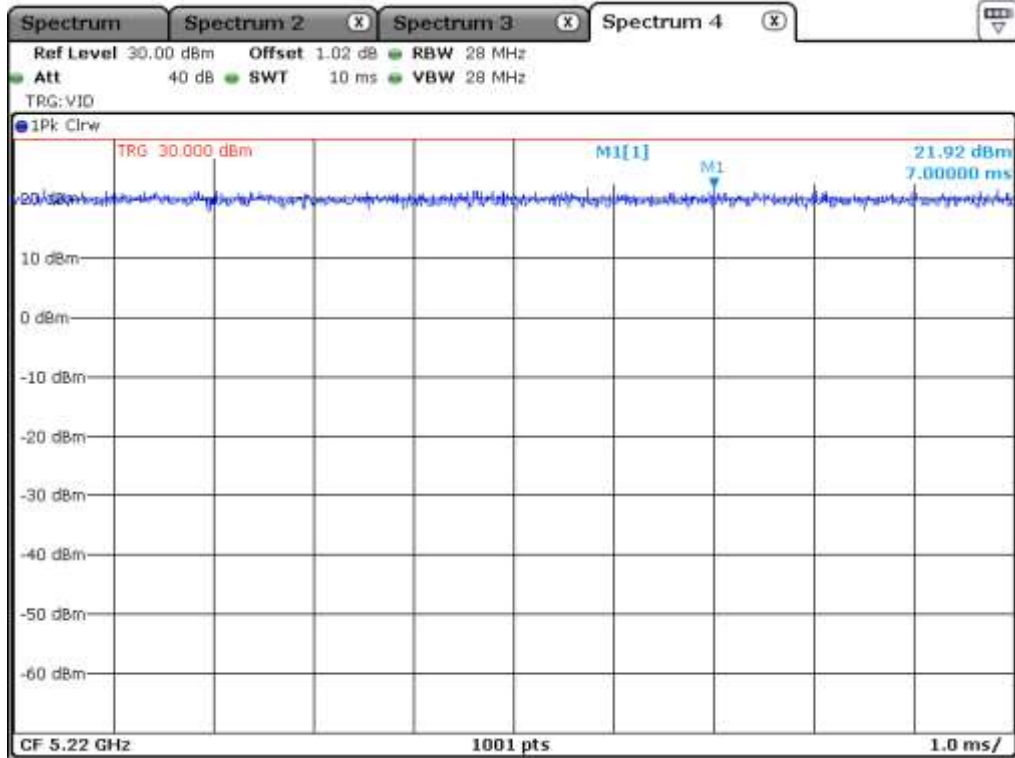


UNII 1_802.11 HT 20_Antenna 0

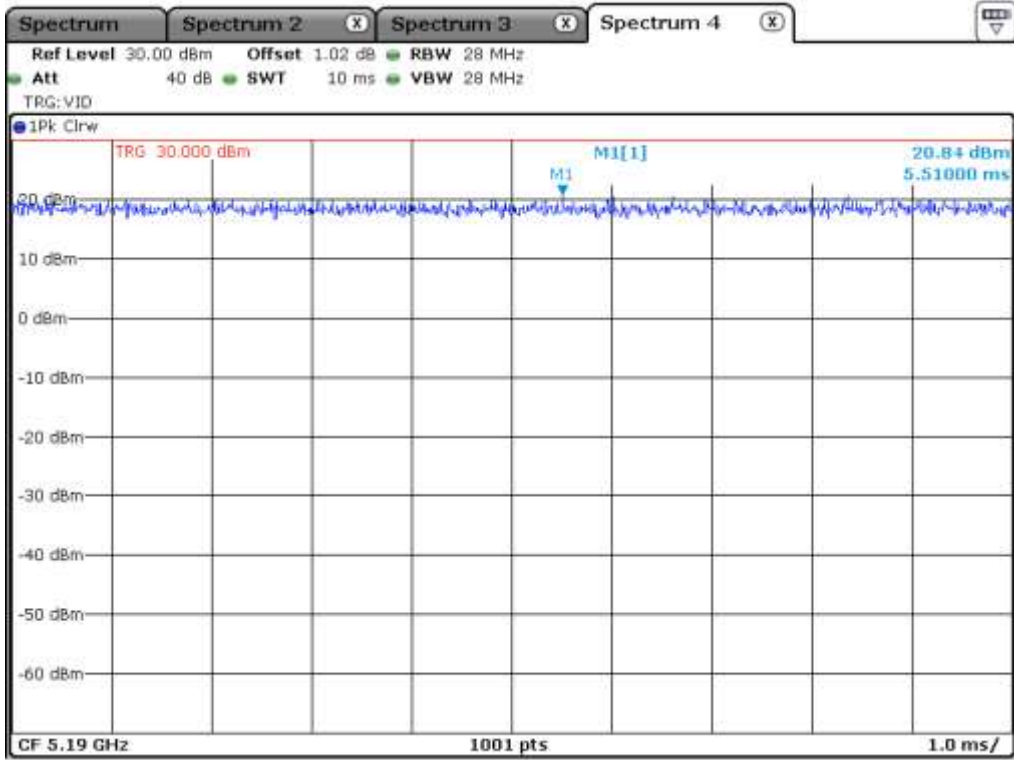


UNII 1_802.11 HT40_Antenna 0

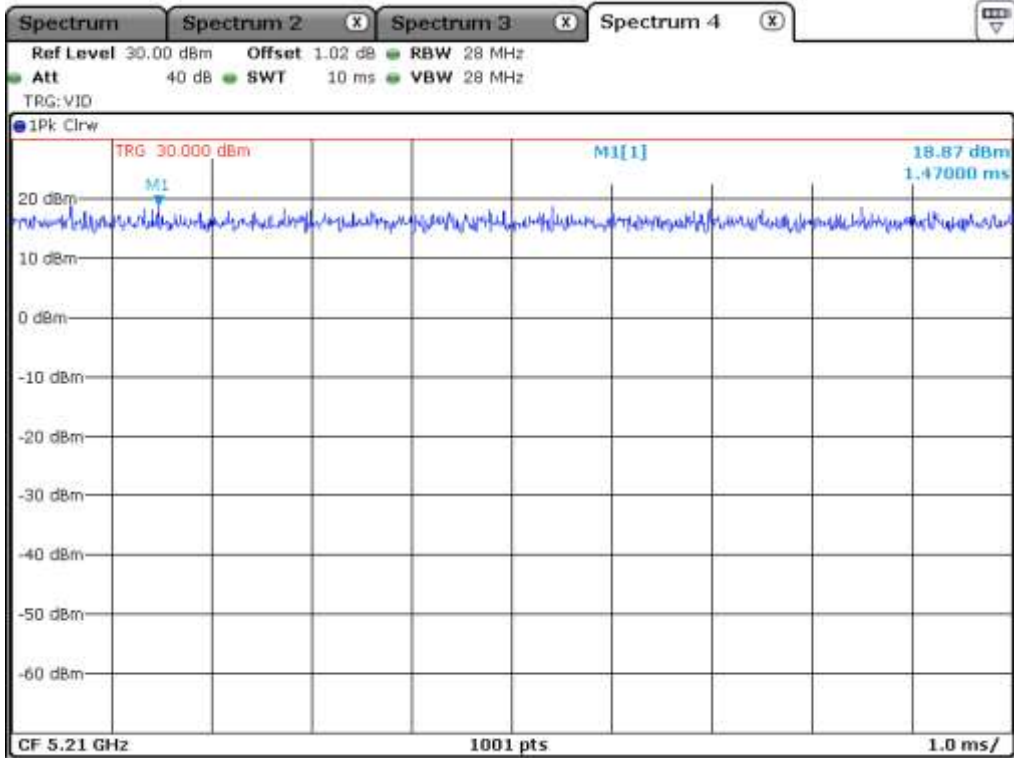


UNII 1_802.11 VHT 80_Antenna 0

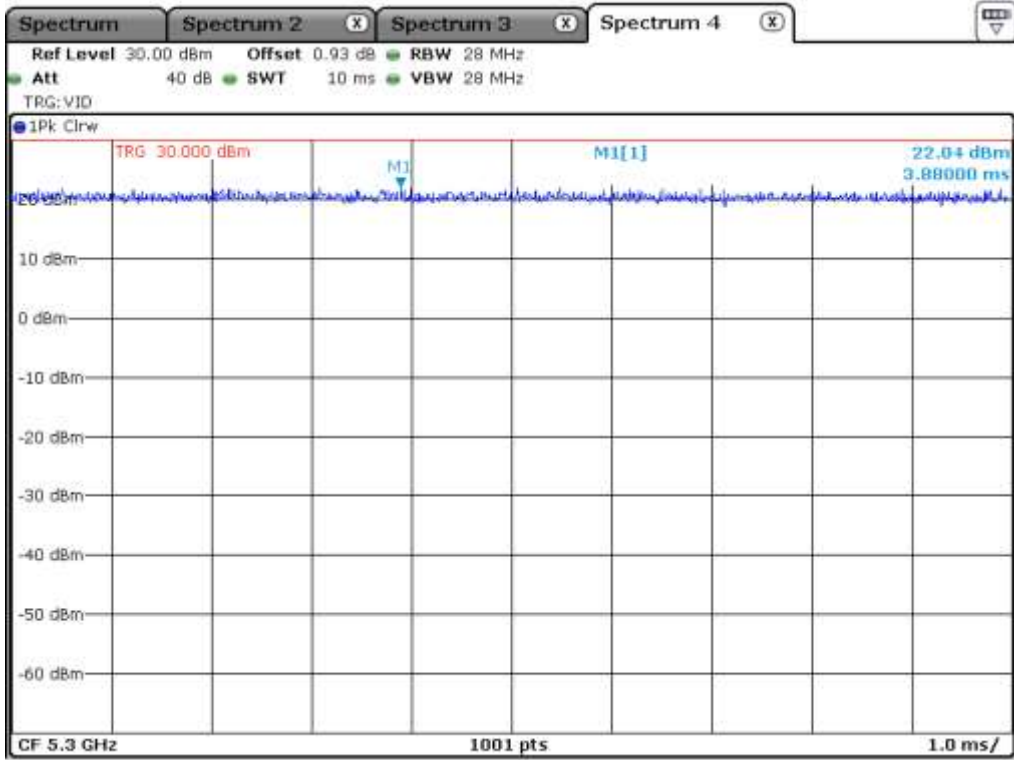


UNII 2A_802.11 a_Antenna 0

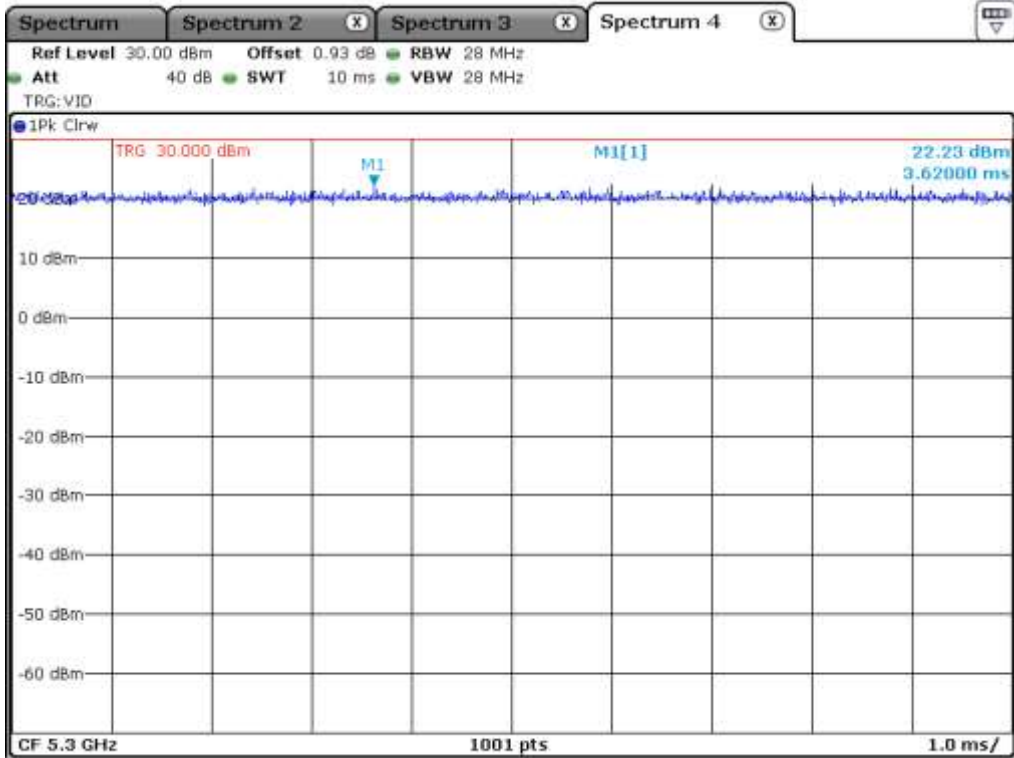


UNII 2A_802.11 HT 20_Antenna 0

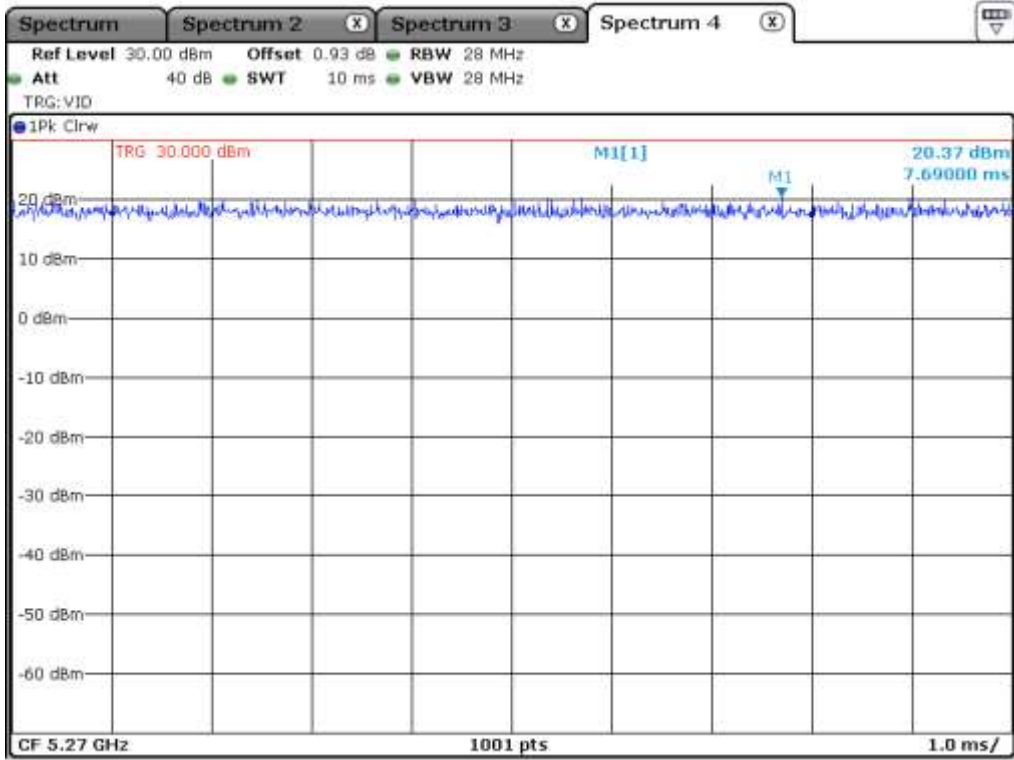


UNII 2A_802.11 HT40_Antenna 0

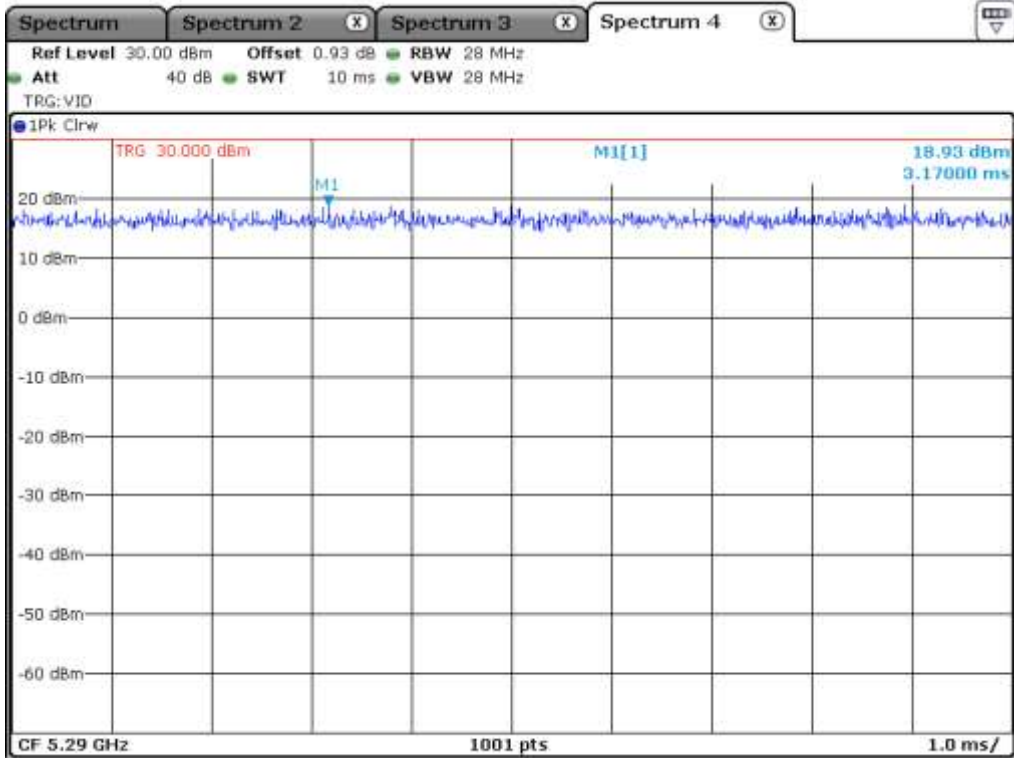


UNII 2A_802.11 VHT 80_Antenna 0

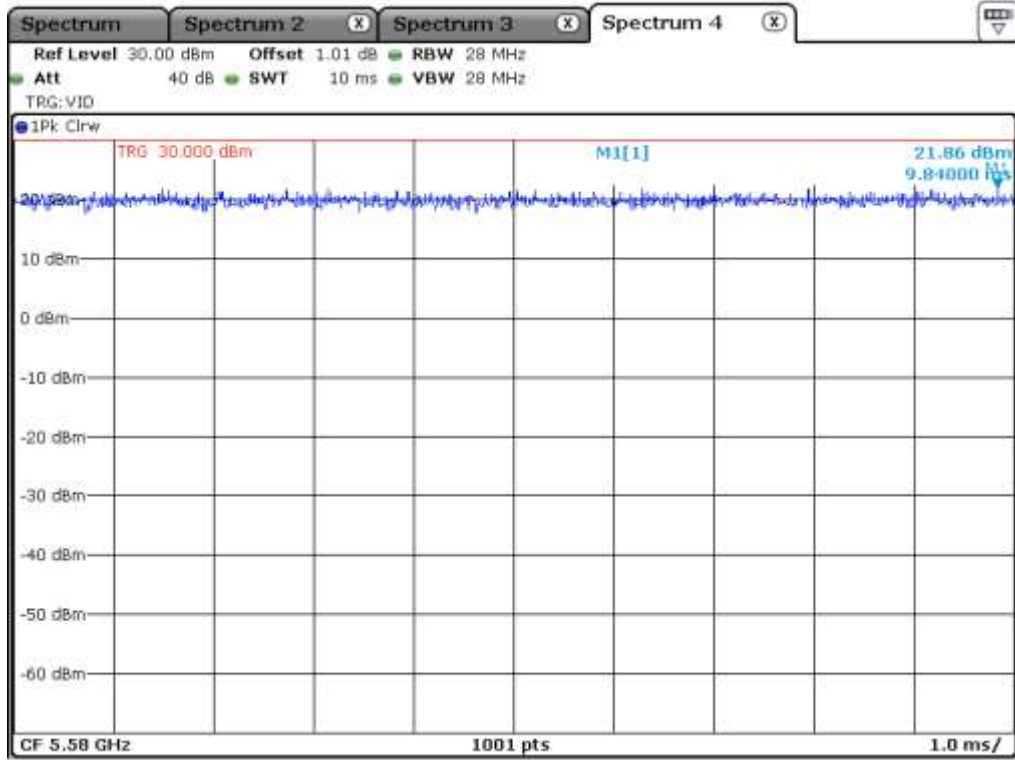


UNII 2C_802.11 a_Antenna 0

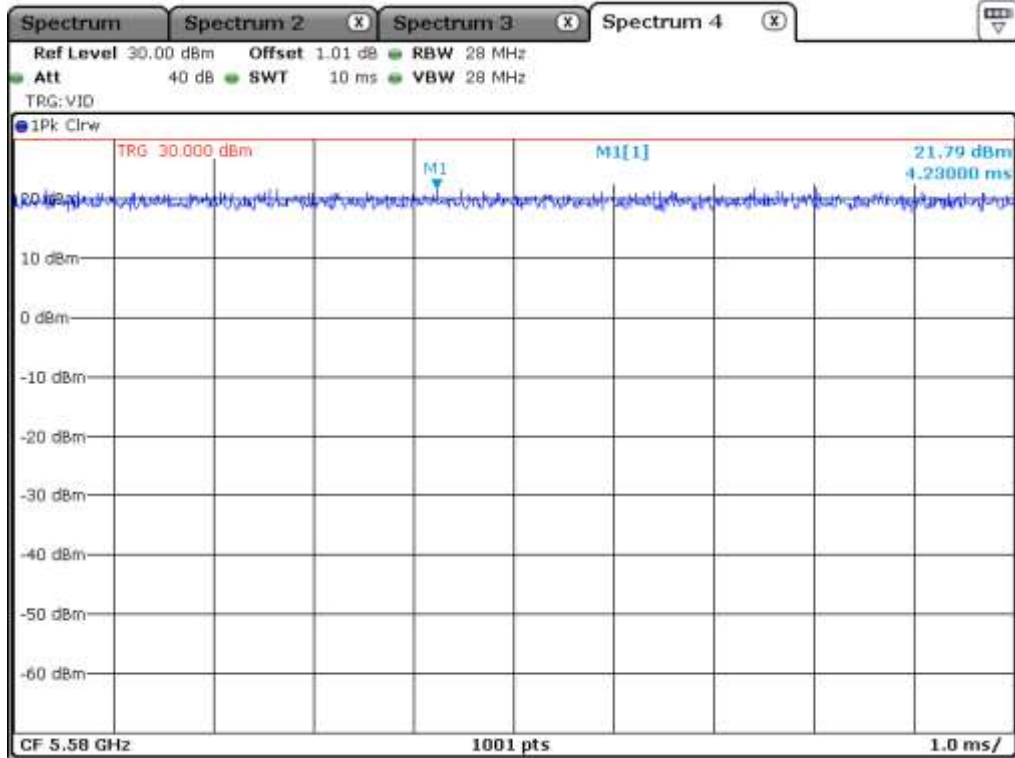


UNII 2C_802.11 HT 20_Antenna 0

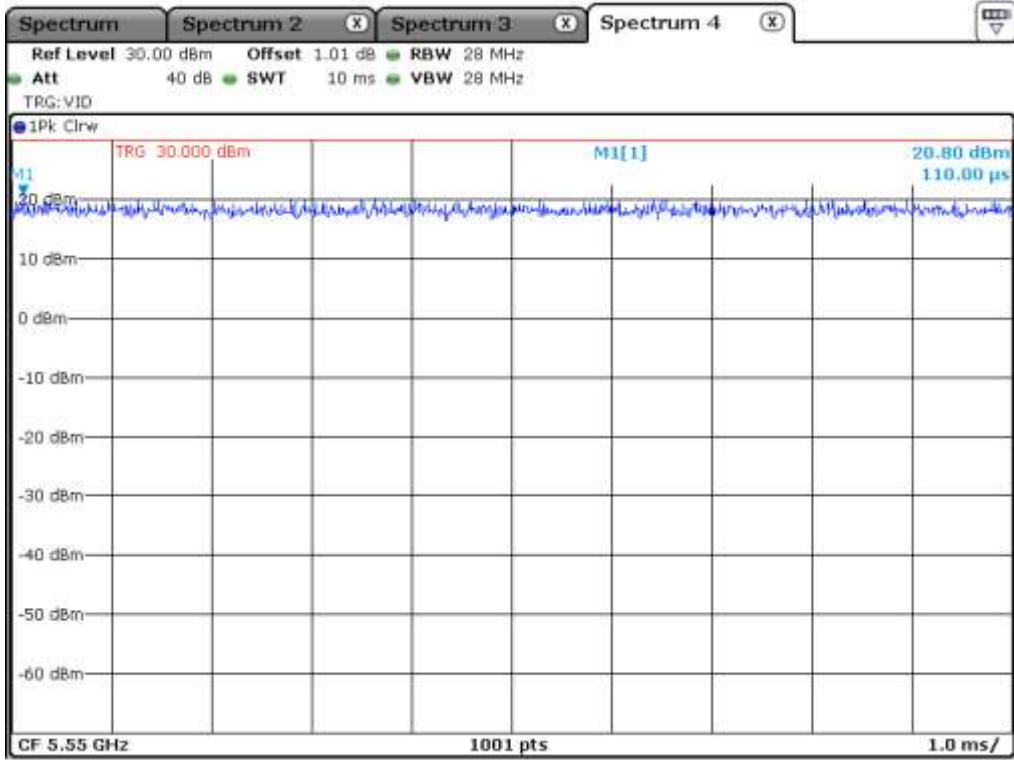


UNII 2C_802.11 HT40_Antenna 0

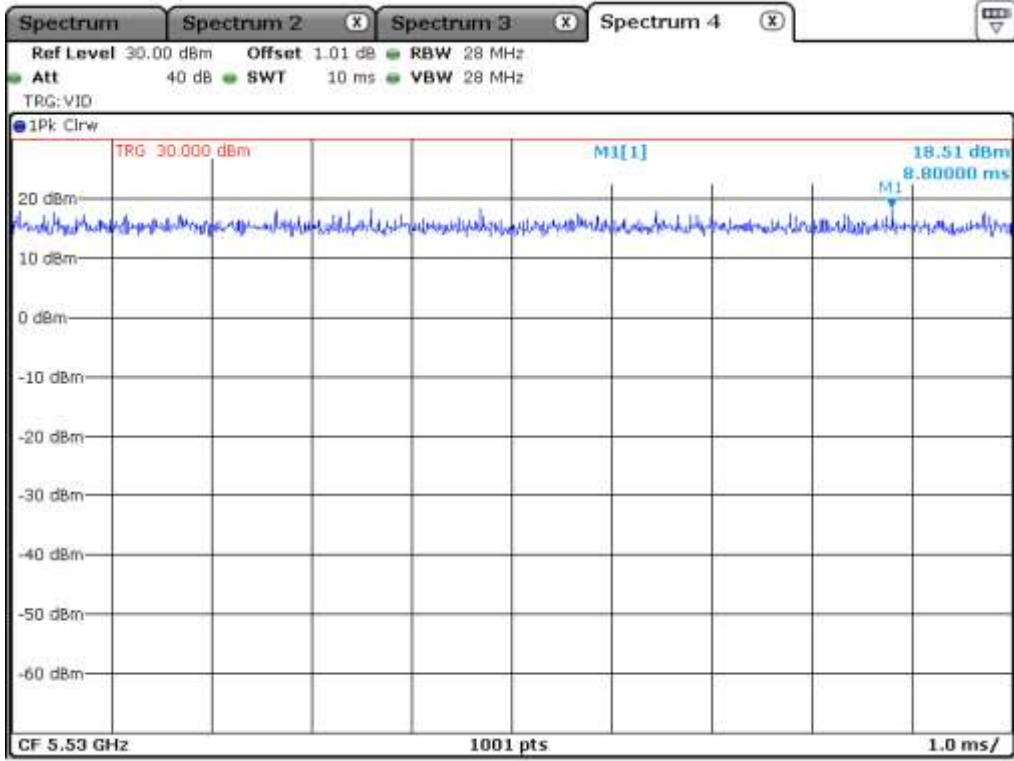


UNII 2C_802.11 VHT 80_Antenna 0

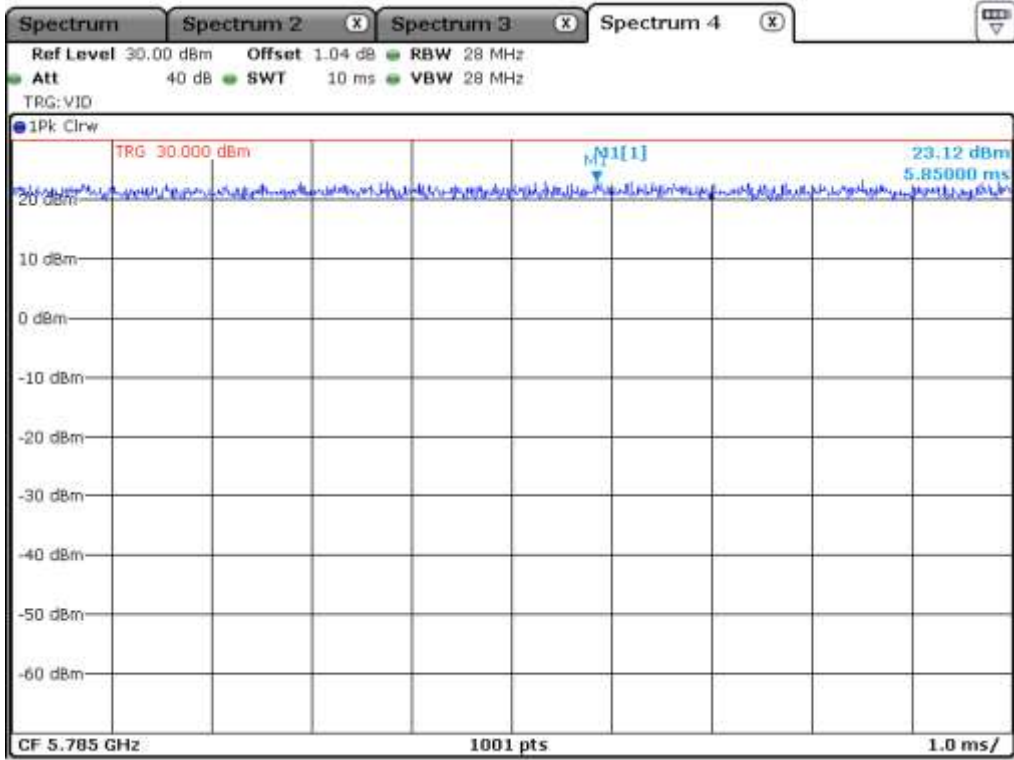


UNII 3_802.11 a_Antenna 0

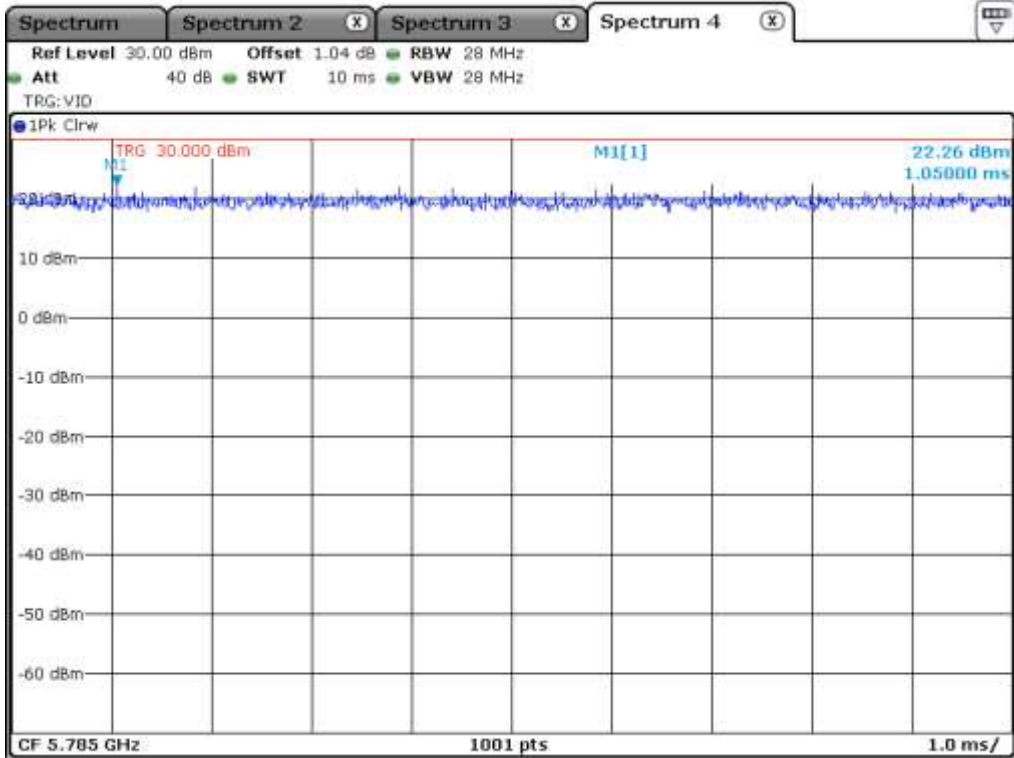


UNII 3_802.11 HT 20_Antenna 0

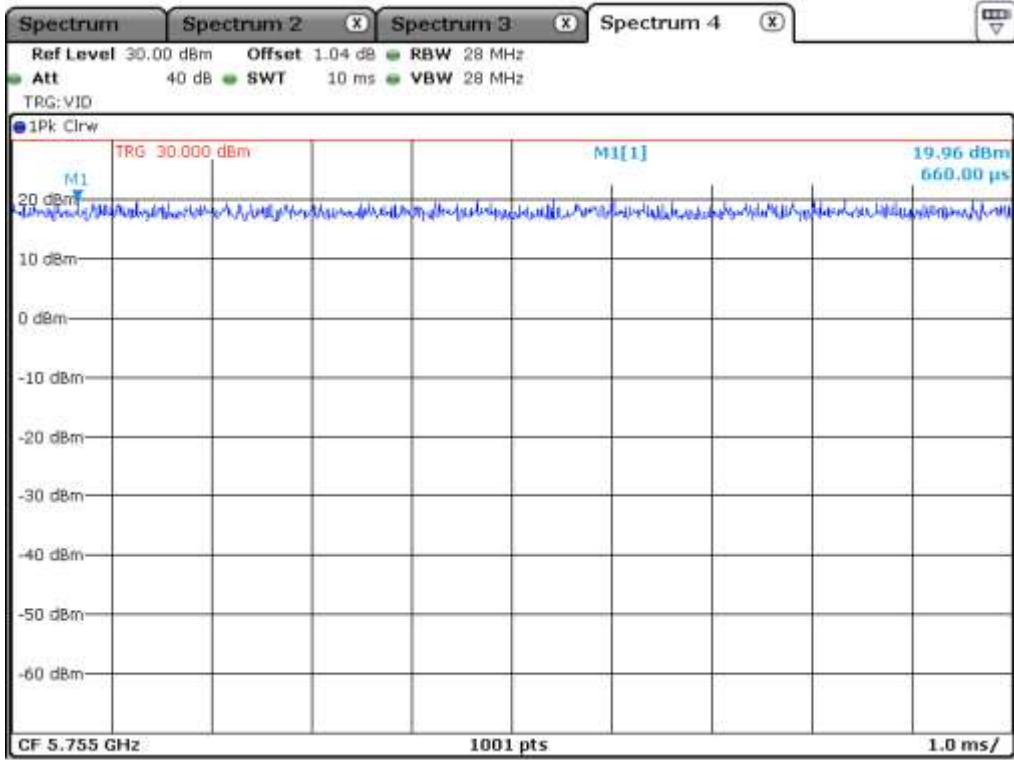


UNII 3_802.11 HT40_Antenna 0

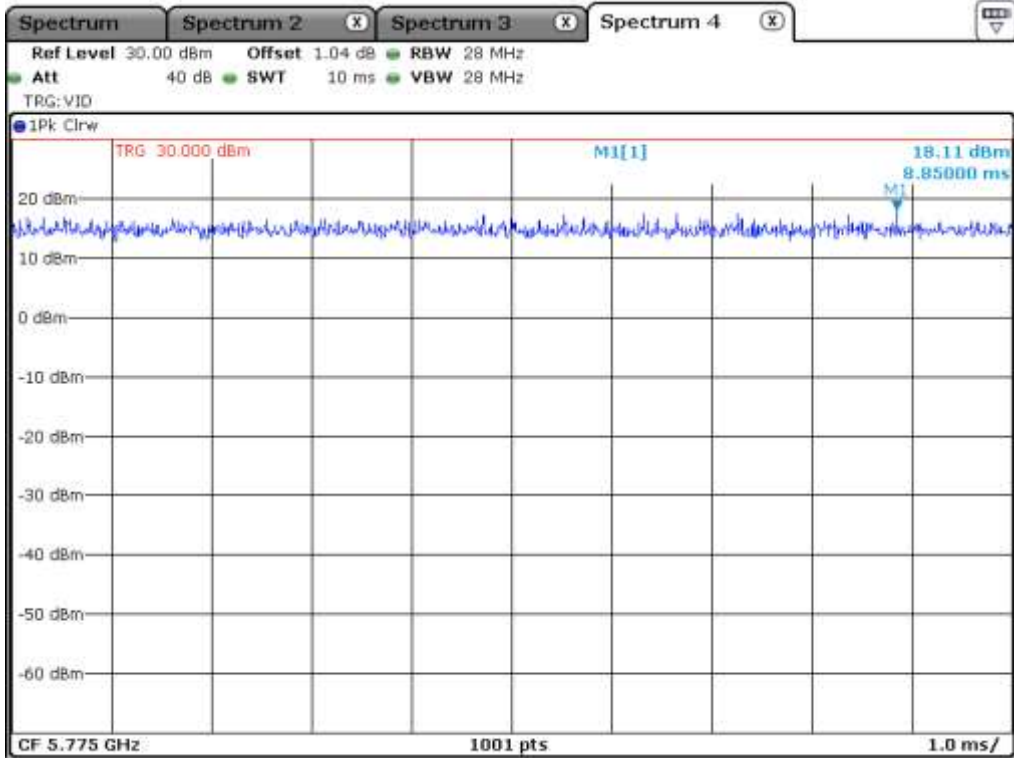


UNII 3_802.11 VHT 80_Antenna 0

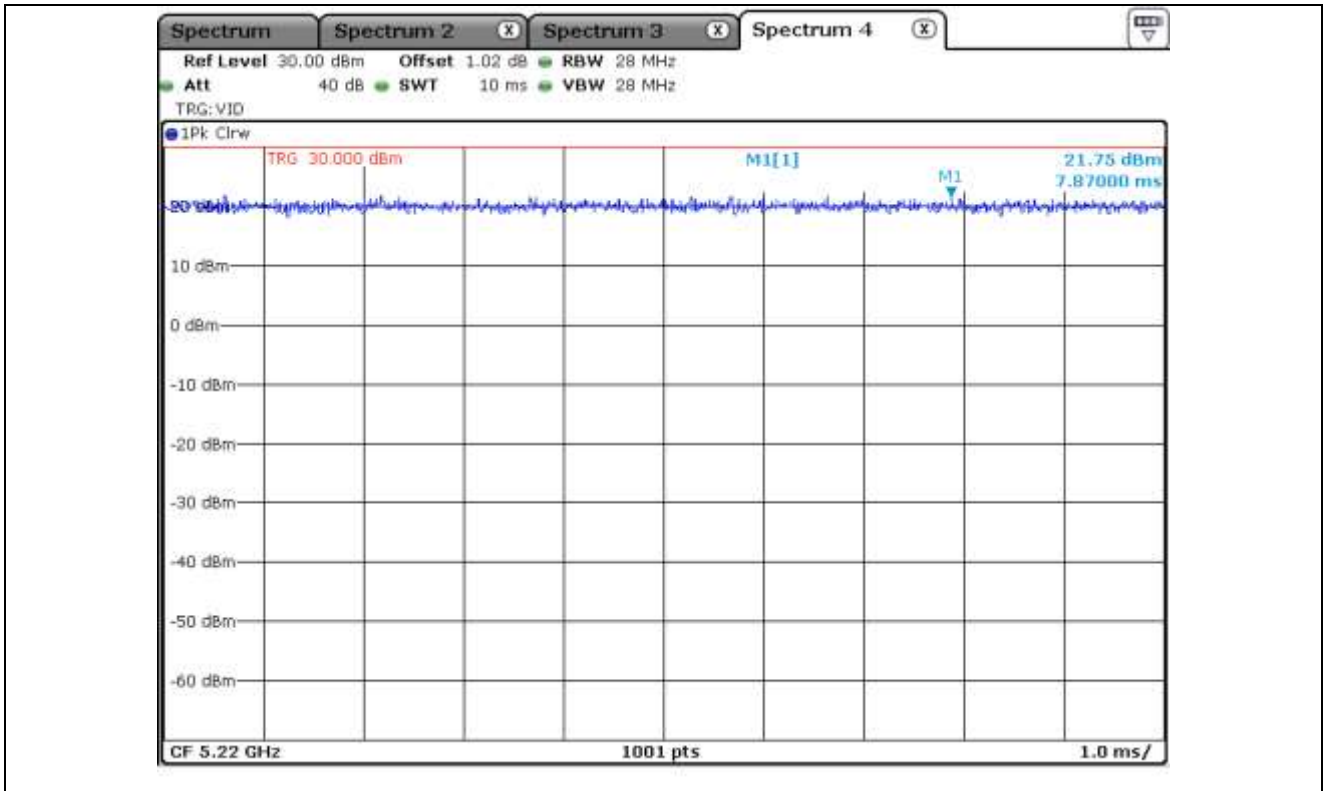


UNII 1_802.11 a_Antenna 1

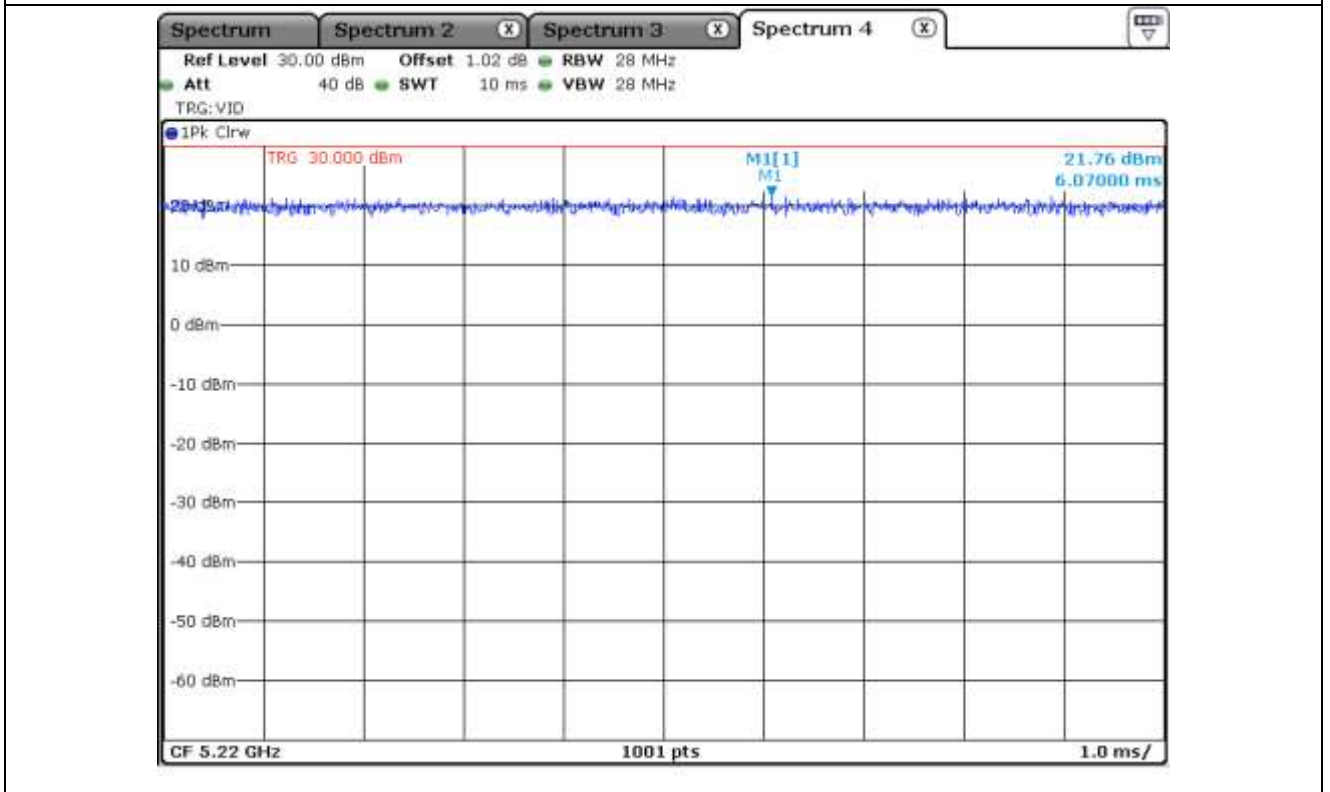


UNII 1_802.11 HT 20_Antenna 1

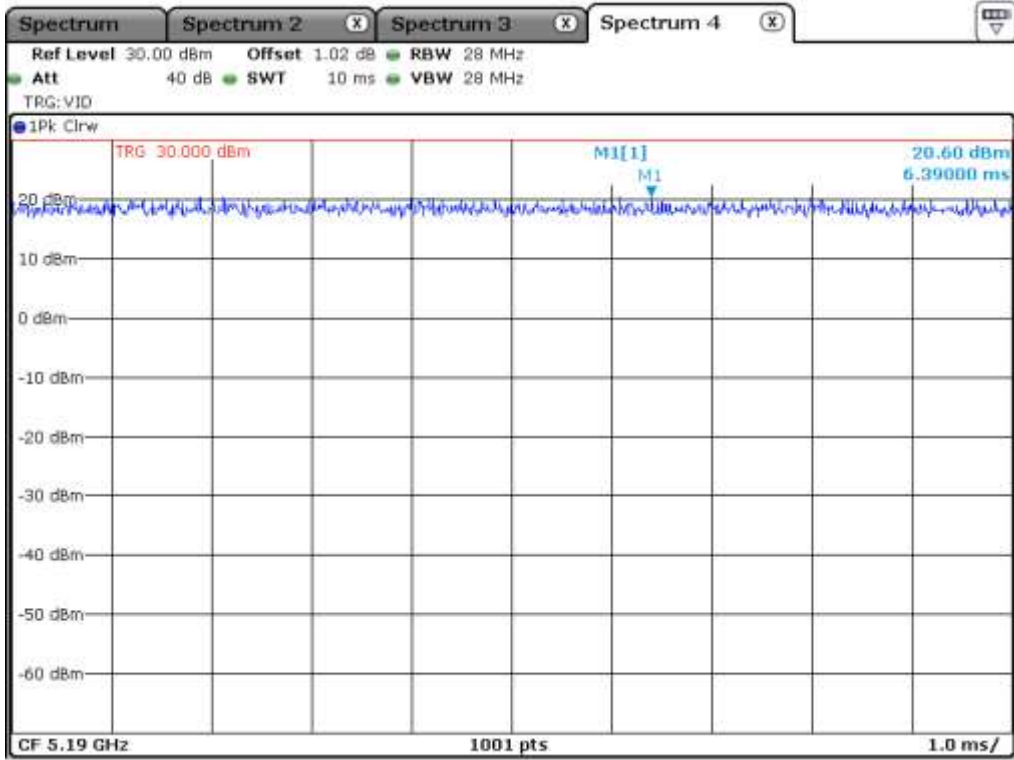


UNII 1_802.11 HT40_Antenna 1

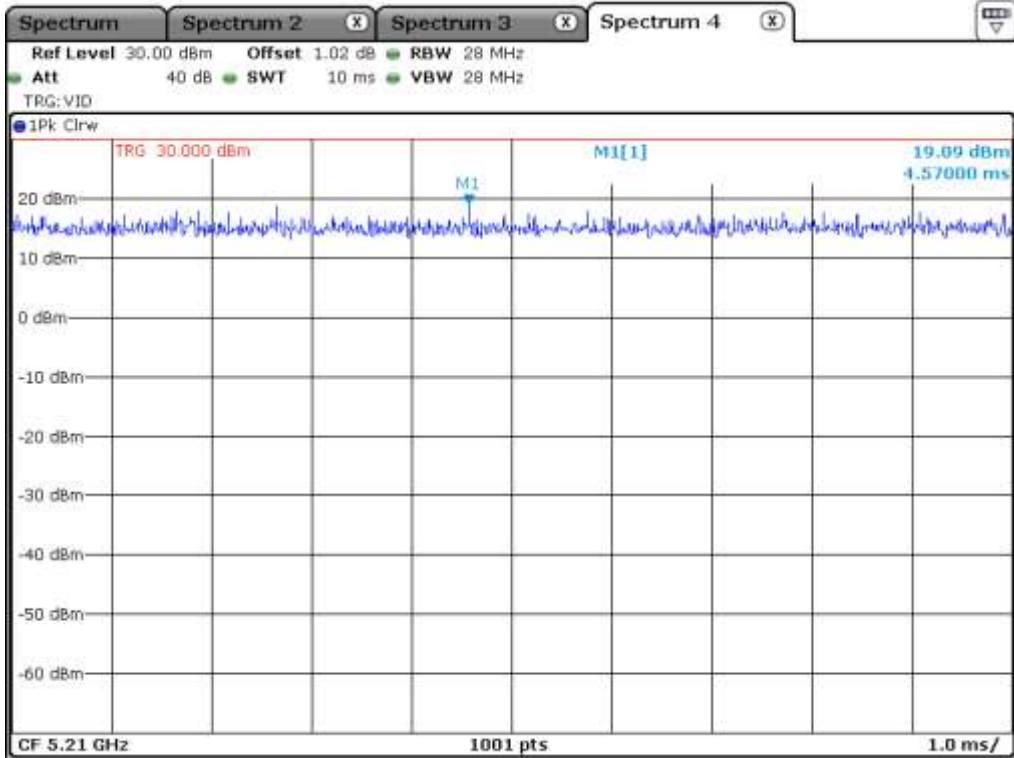


UNII 1_802.11 VHT 80_Antenna 1

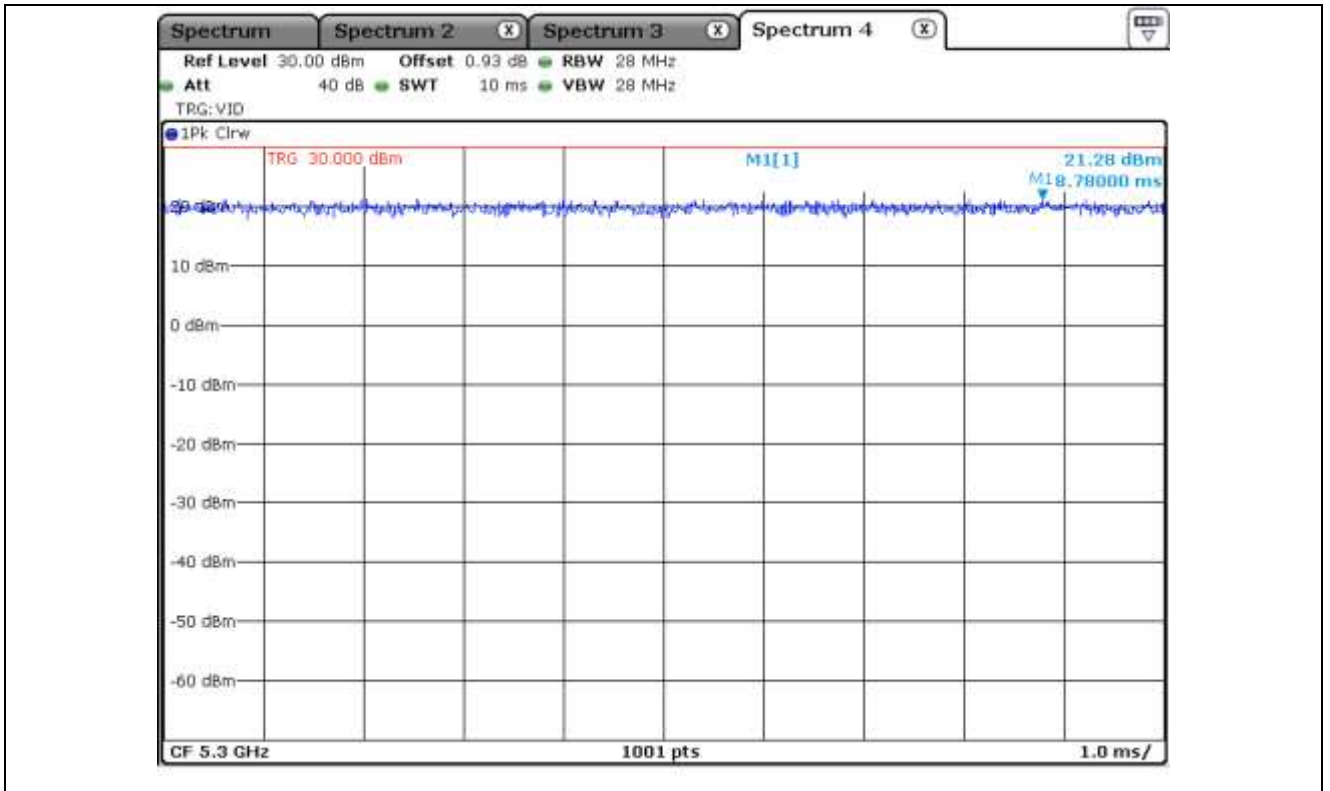


UNII 2A_802.11 a_Antenna 1

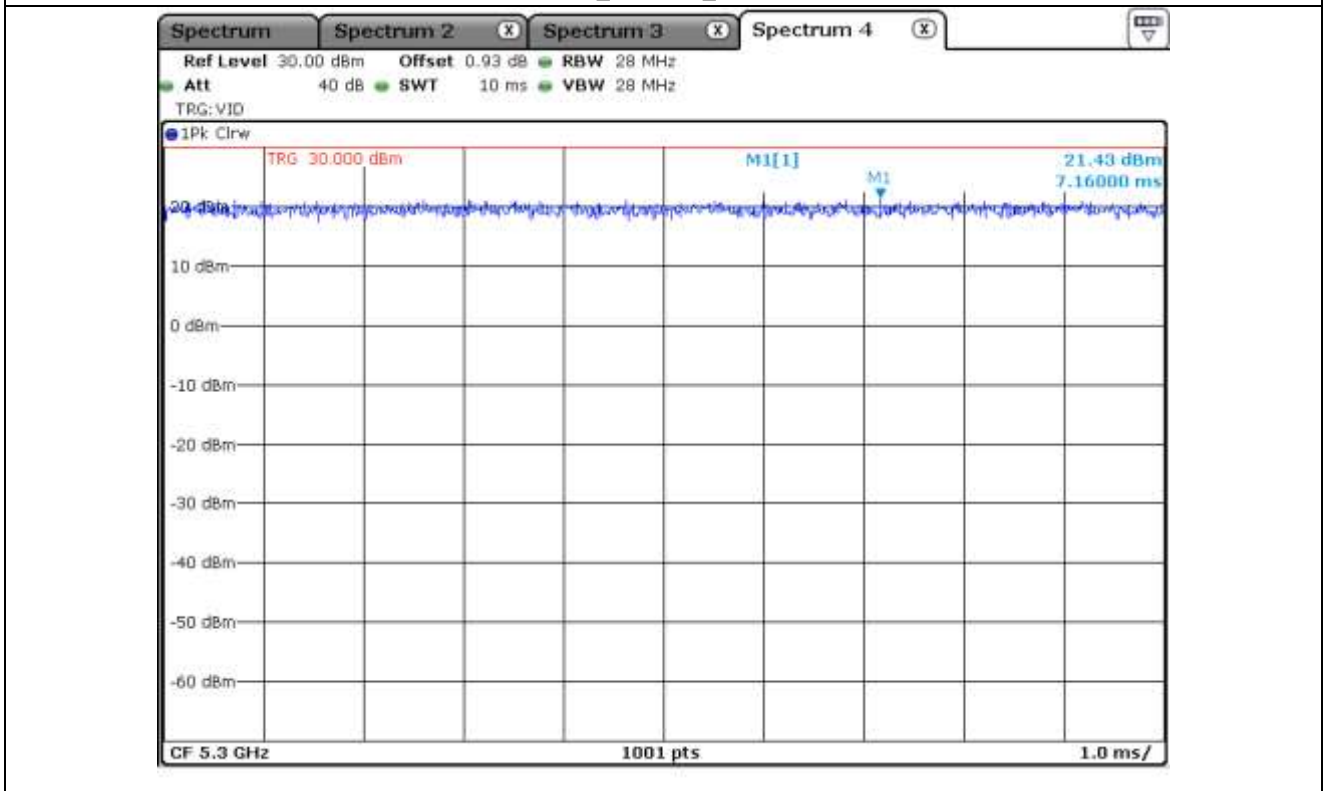


UNII 2A_802.11 HT 20_Antenna 1

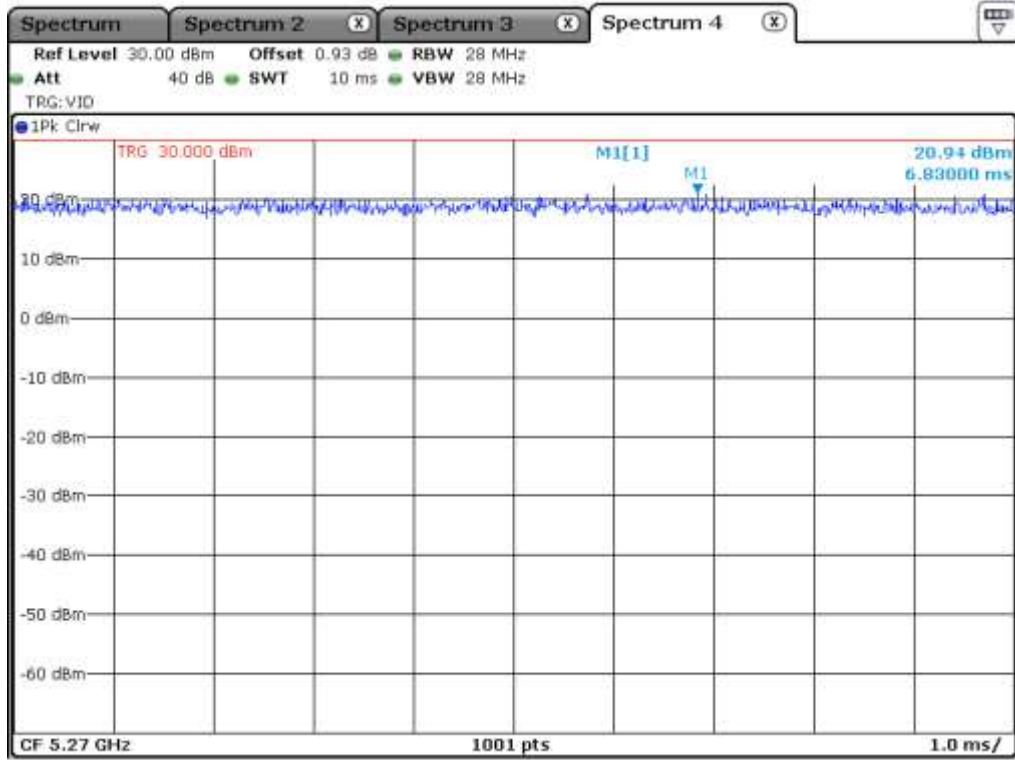


UNII 2A_802.11 HT40_Antenna 1

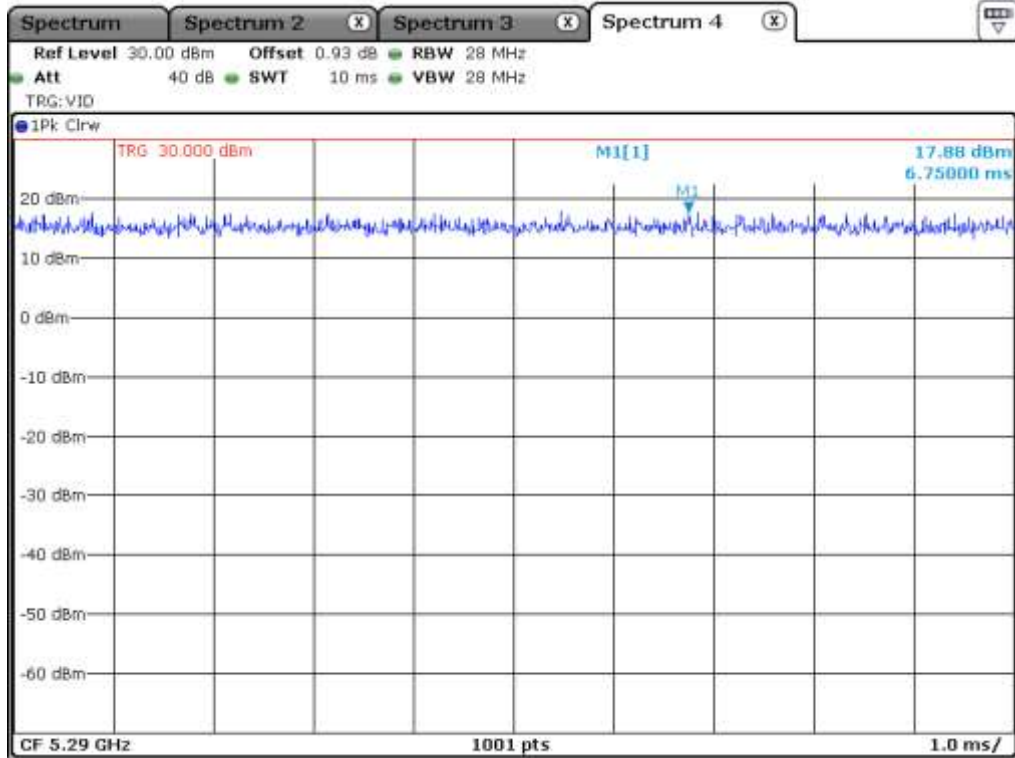


UNII 2A_802.11 VHT 80_Antenna 1

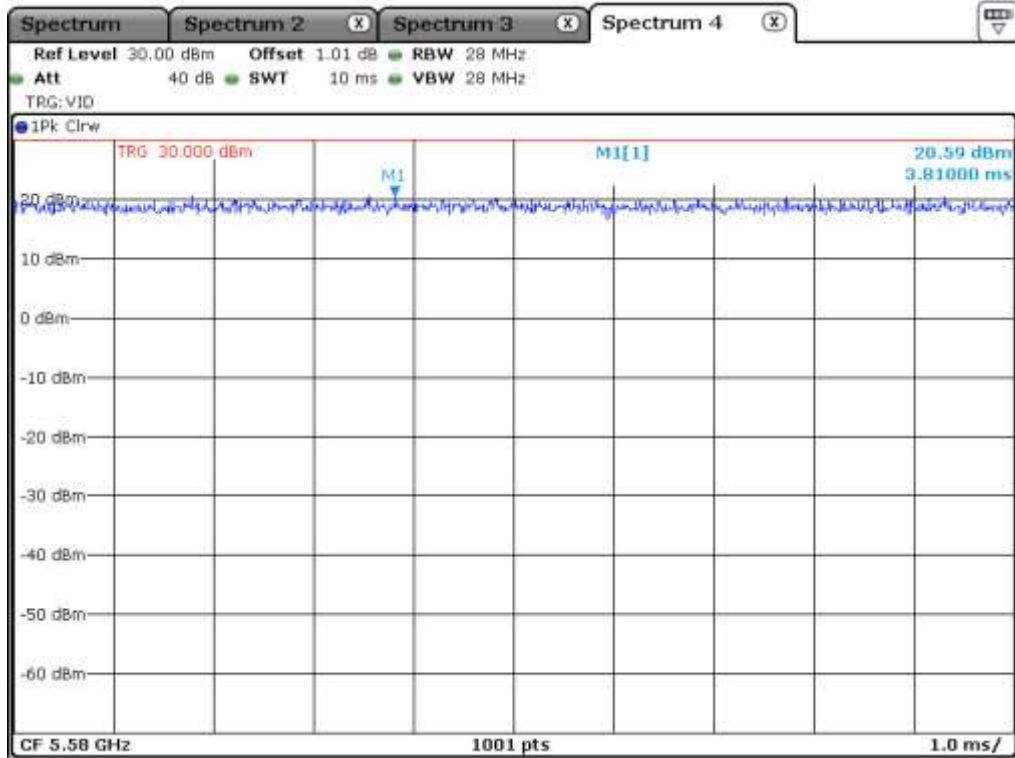


UNII 2C_802.11 a_Antenna 1

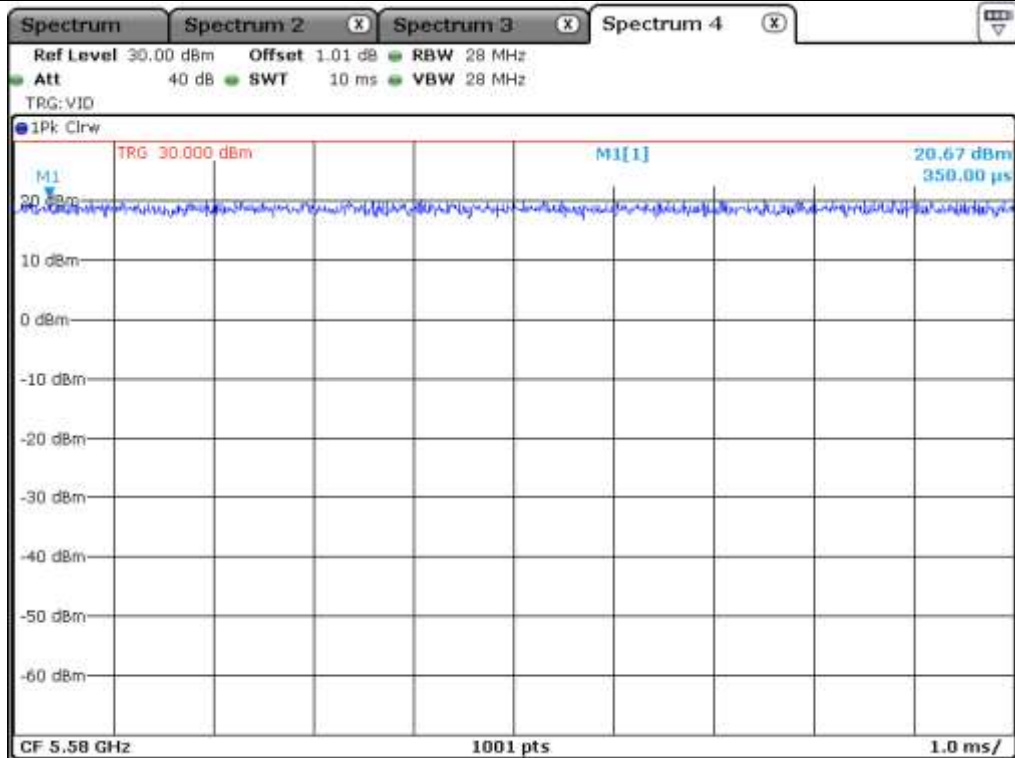


UNII 2C_802.11 HT 20_Antenna 1

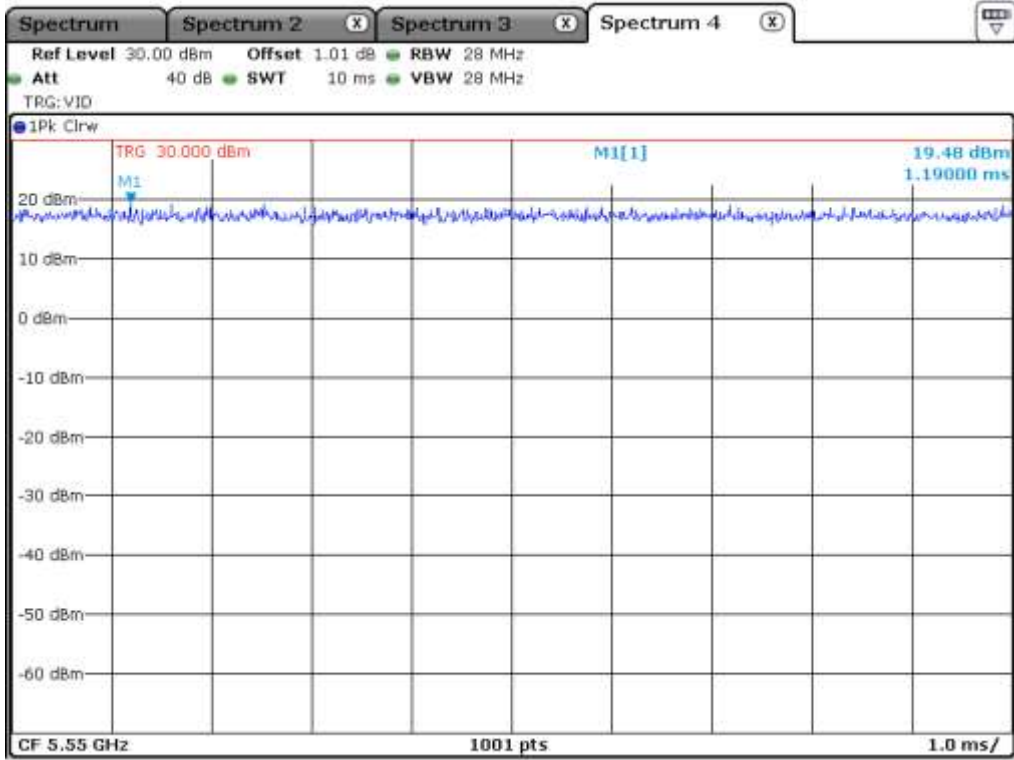


UNII 2C_802.11 HT40_Antenna 1

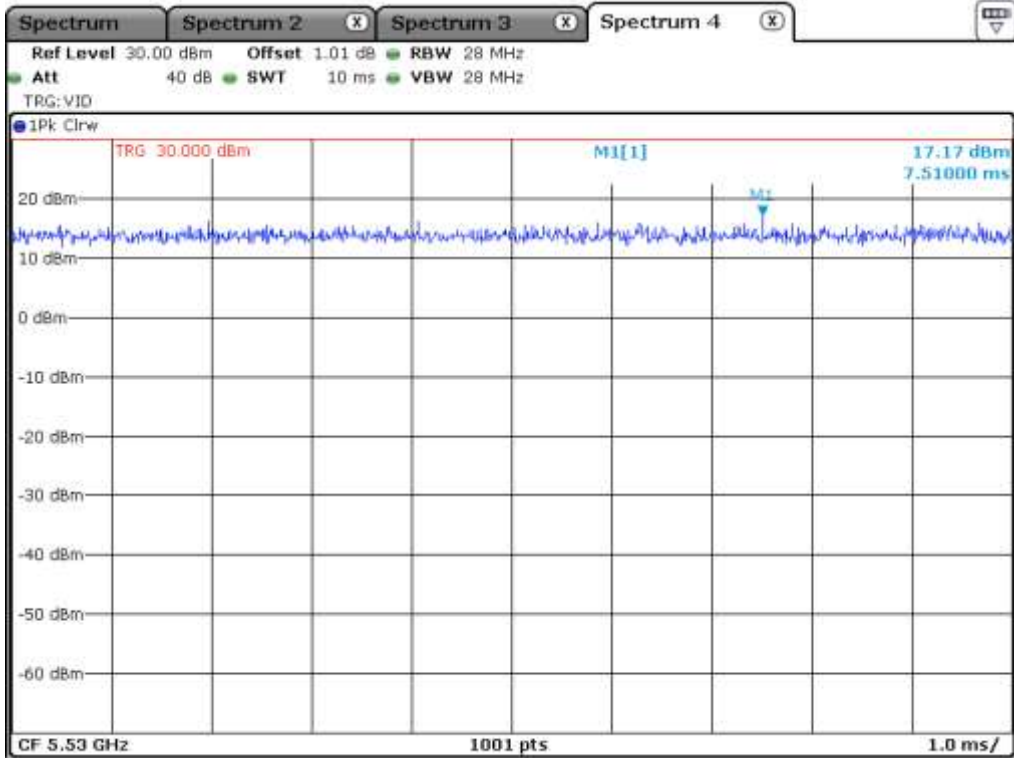


UNII 2C_802.11 VHT 80_Antenna 1

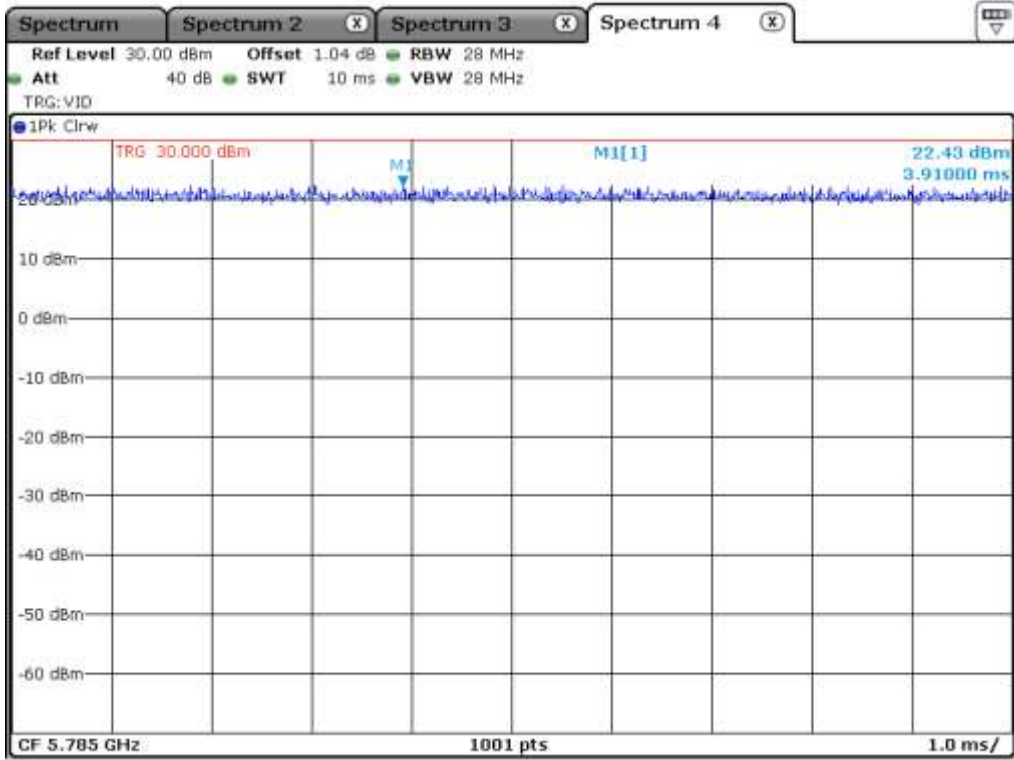


UNII 3_802.11 a_Antenna 1

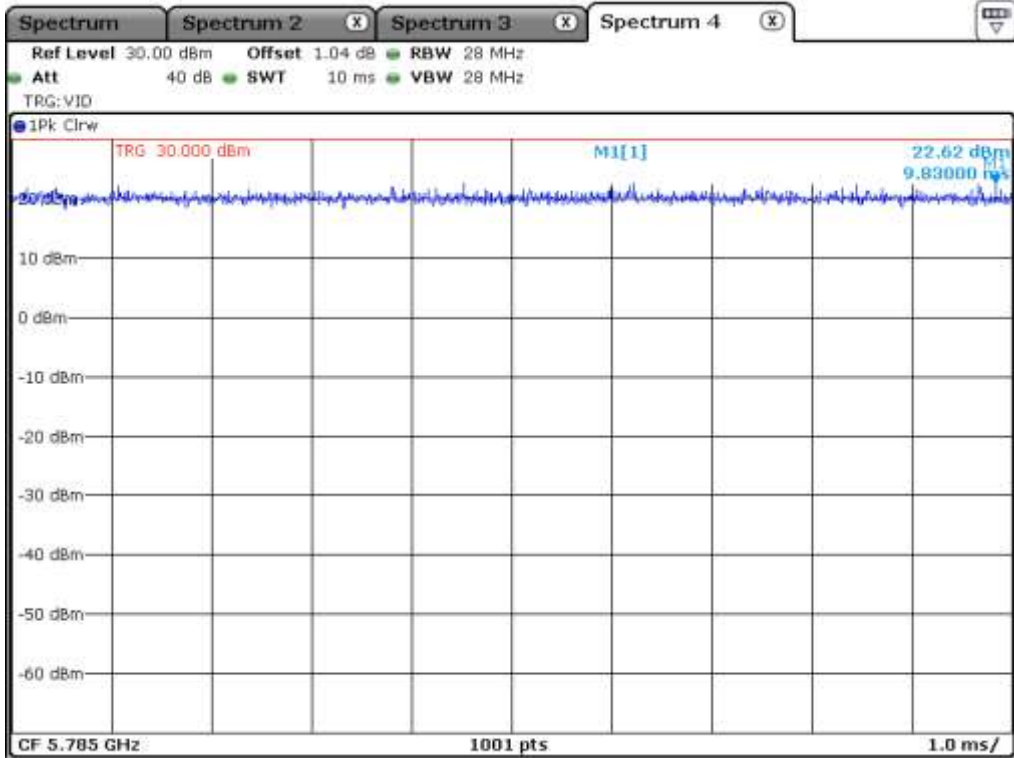


UNII 3_802.11 HT 20_Antenna 1

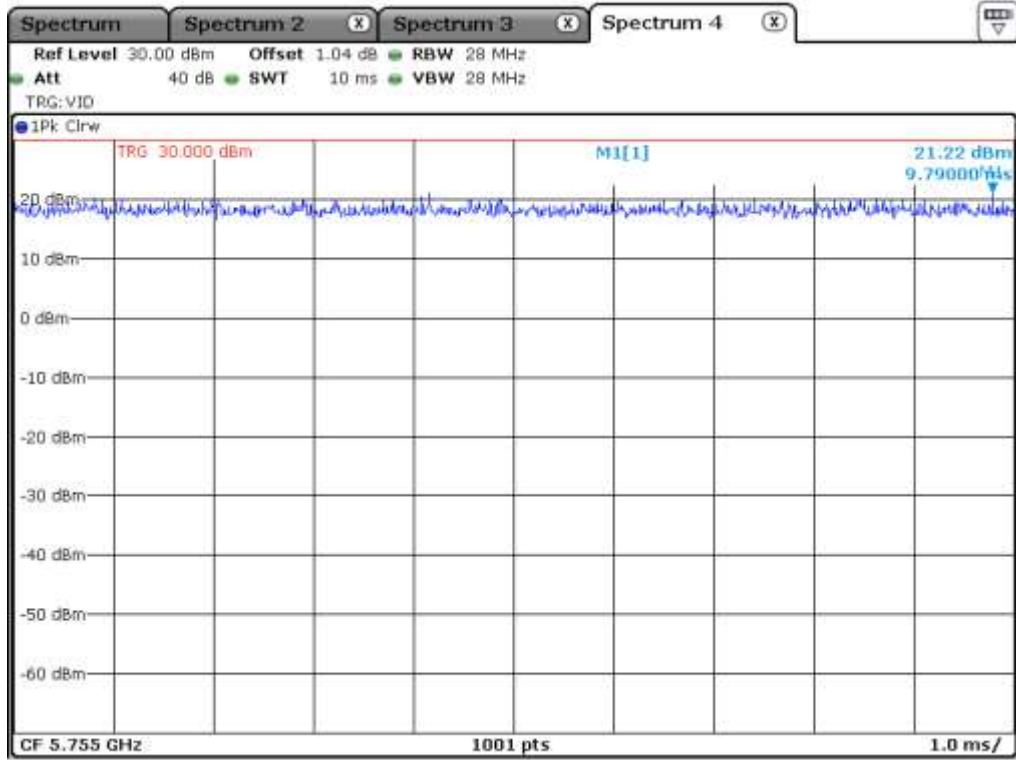


UNII 3_802.11 HT40_Antenna 1

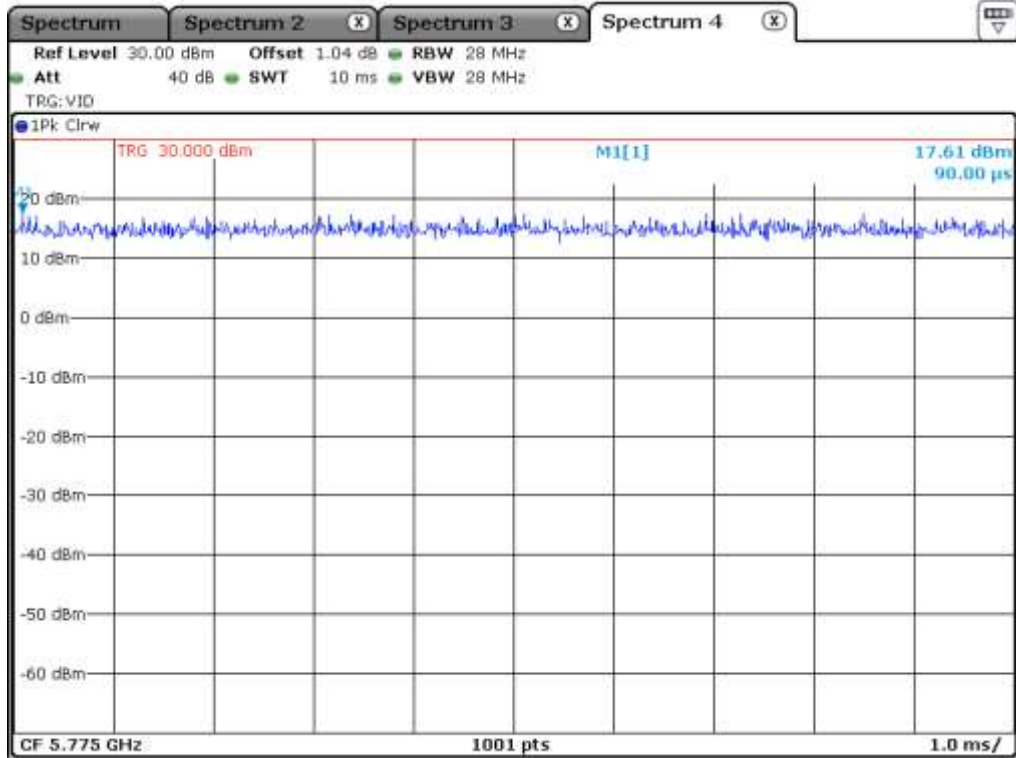


UNII 3_802.11 VHT 80_Antenna 1

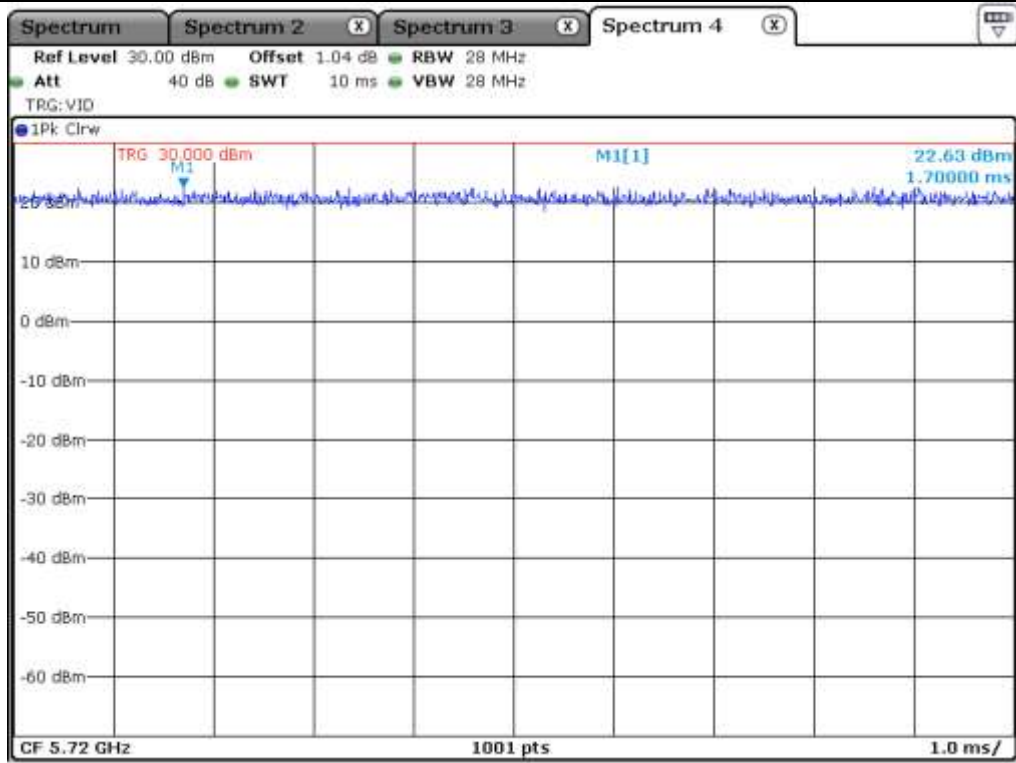


Staddle_802.11 a_Antenna 0

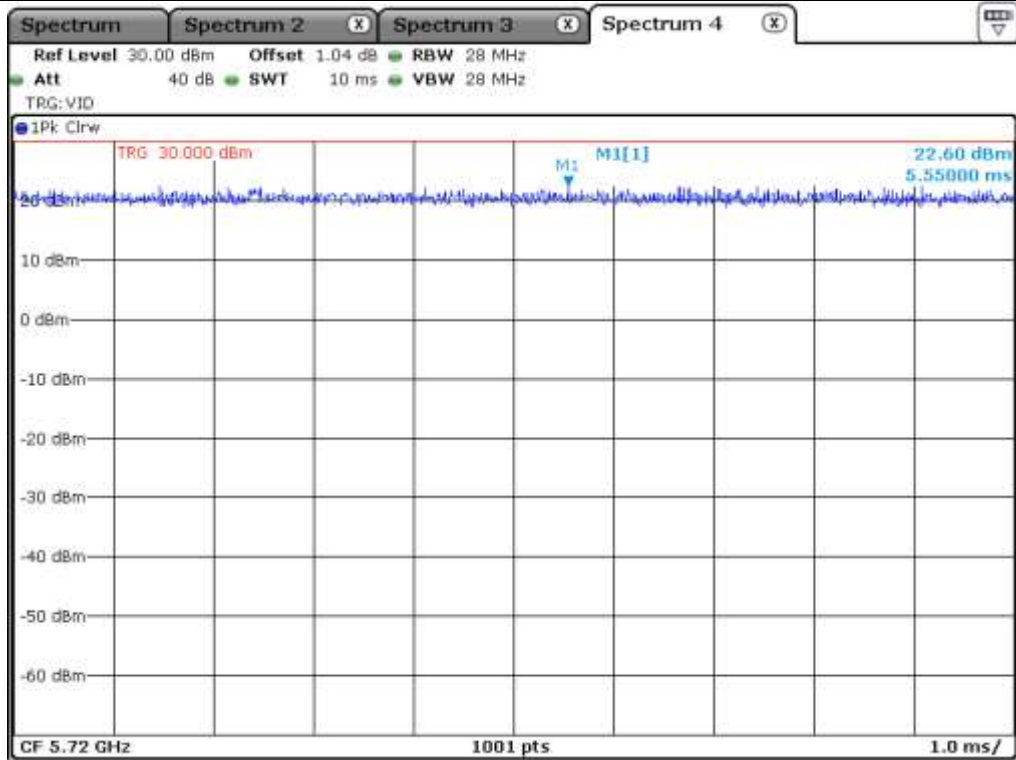


Staddle_802.11 HT 20_Antenna 0

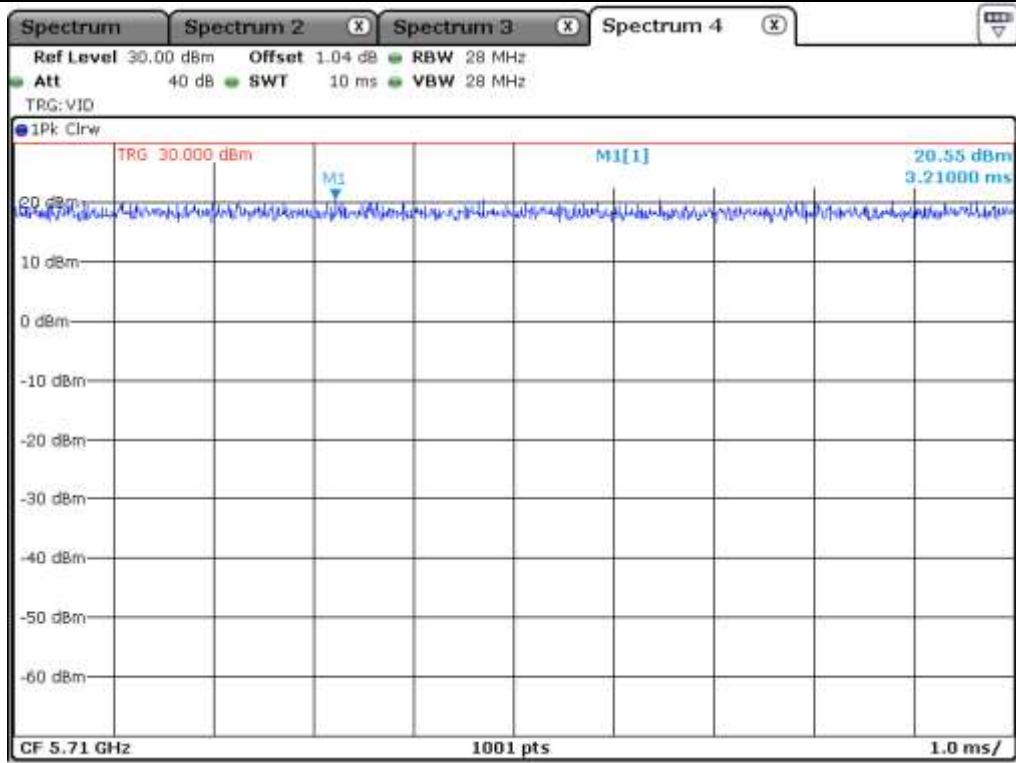


Staddle_802.11 HT40_Antenna 0

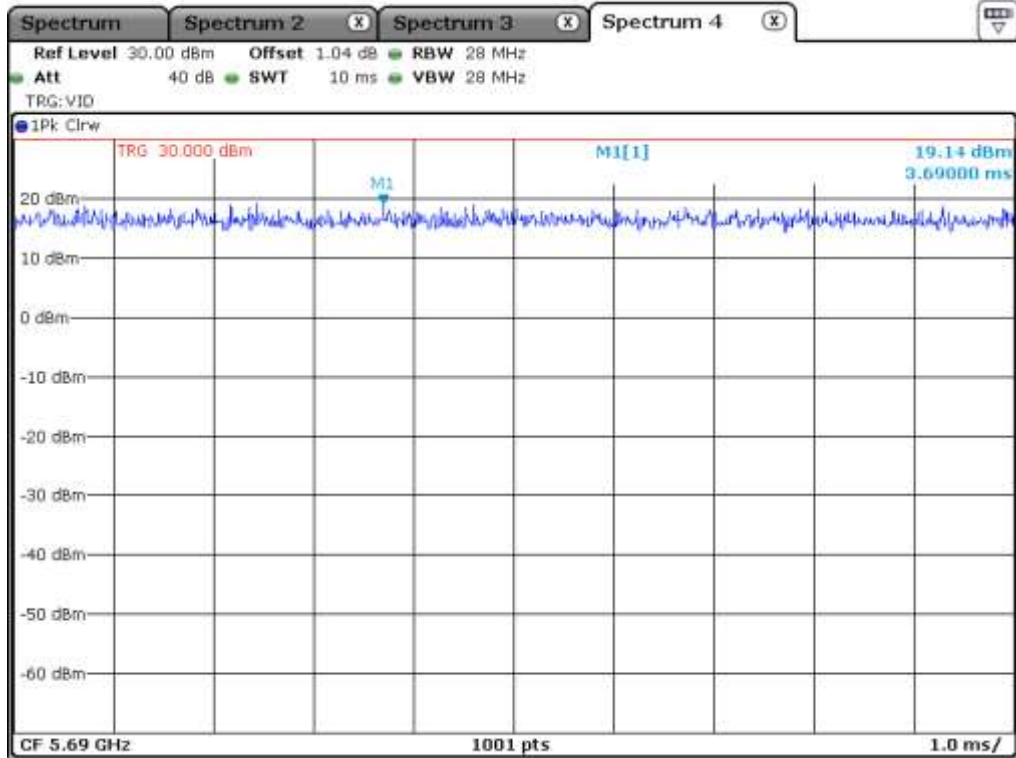


Staddle_802.11 VHT 80_Antenna 0

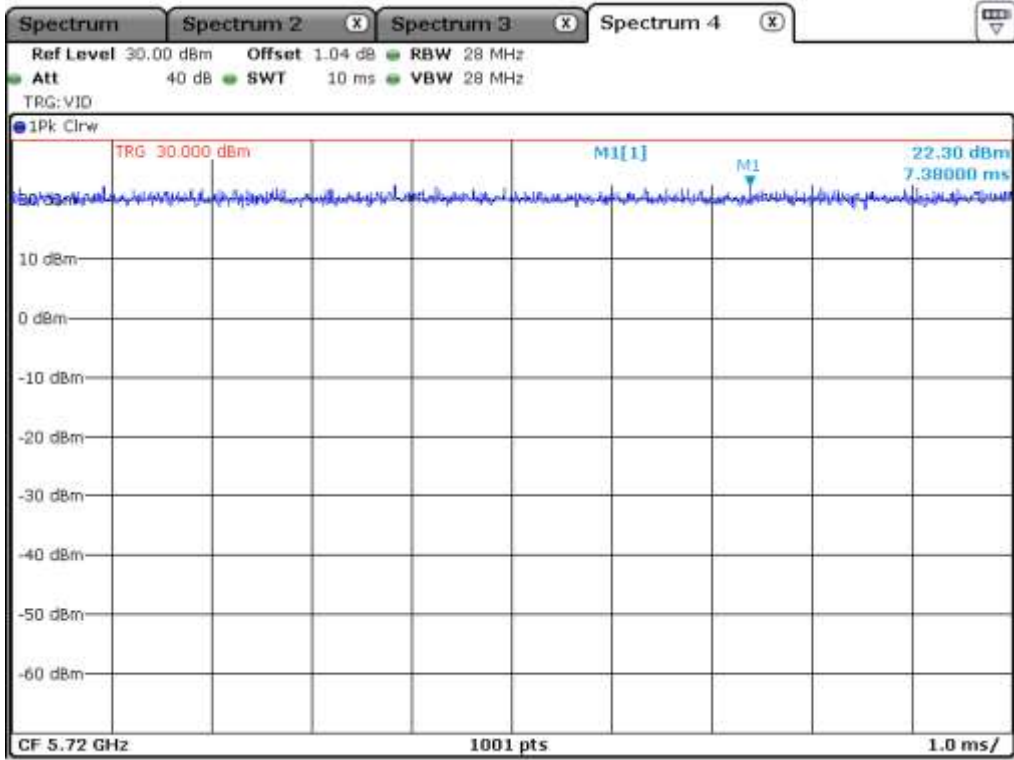


Stadle_802.11 a_Antenna 1

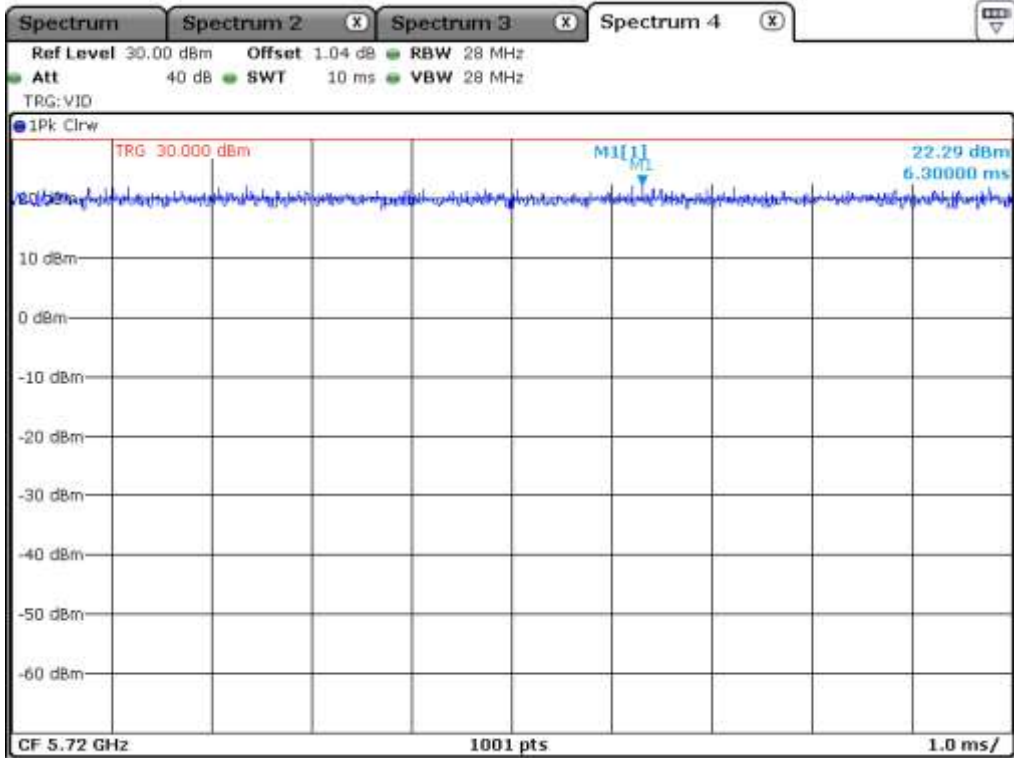

Stadle_802.11 HT 20_Antenna 1

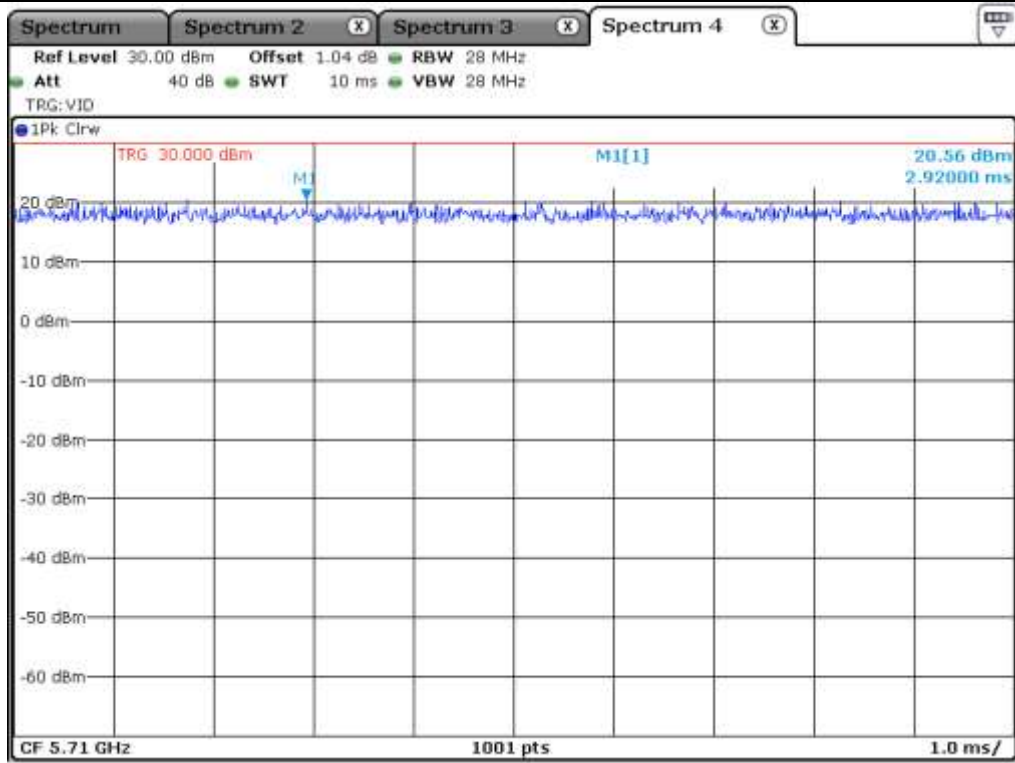

Staddle_802.11 HT40_Antenna 1

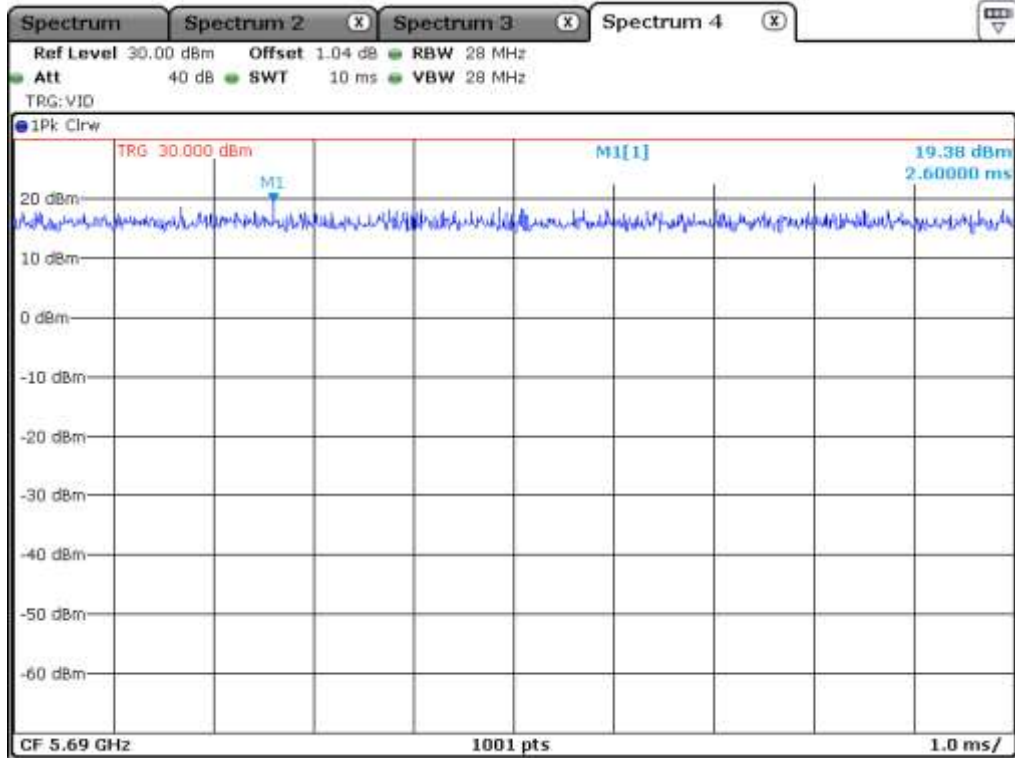

Staddle_802.11 VHT 80_Antenna 1

5.4 Configuration of Test System

Line Conducted Test: The EUT was connected to USB and the power of USB was connected to Notebook PC. All supporting equipments were connected to another LISN. Preliminary Power line Conducted Emission test was performed by using the procedure in ANSI C63.10: 2013 to determine the worse operating conditions.

Radiated Emission Test: Preliminary radiated emissions test were conducted using the procedure in ANSI C63.10: 2013 to determine the worse operating conditions. Final radiated emission tests were conducted at 3 meter Semi Anechoic Chamber.

The turntable was rotated through 360 degrees and the EUT was tested by positioned three orthogonal planes to obtain the highest reading on the field strength meter. Once maximum reading was determined, the search antenna was raised and lowered in both vertical and horizontal polarization.

5.5 Antenna Requirement

For intentional device, according to section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Antenna Construction:

The antenna of the EUT is a Chip Antenna on the main board in the EUT, so no consideration of replacement by the user.

6. PRELIMINARY TEST

6.1 AC Power line Conducted Emissions Tests

During Preliminary Test, the following operating mode was investigated.

Operation Mode	The Worse operating condition (Please check one only)
Transmitting Mode	X

6.2 General Radiated Emissions Tests

During Preliminary Test, the following operating mode was investigated.

Operation Mode	The Worse operating condition (Please check one only)
Transmitting Mode	X


7. MIMIMUM 26 dB BANDWIDTH

7.1 Operating environment

Temperature : 23 °C
 Relative humidity : 41 % R.H.

7.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz, and peak detection was used. The 26 dB bandwidth is defined as the total spectrum over which the power is higher than the peak power minus 26 dB.

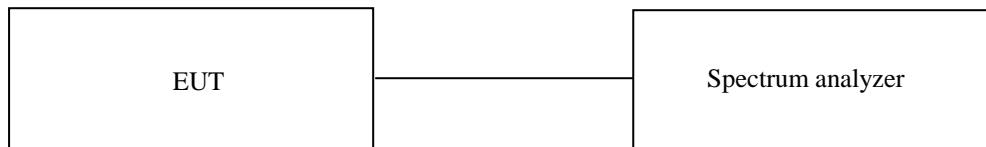

7.3 Test Date

August 21, 2020 ~ September 08, 2020


7.4 Test data for 802.11a RLAN Mode

7.4.1 Test data for Antenna 0


-. Test Result : Pass

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	26 dB Bandwidth (MHz)
5 150 ~ 5 250	Low	5 180.00	20.03
	Middle	5 220.00	20.13
	High	5 240.00	20.03
5 250 ~ 5 350	Low	5 260.00	20.23
	Middle	5 300.00	20.28
	High	5 320.00	20.33
5 470 ~ 5 725	Low	5 500.00	19.78
	Middle	5 580.00	19.88
	High	5 700.00	19.93
5 725 ~ 5 850	Low	5 745.00	19.78
	Middle	5 785.00	19.98
	High	5 825.00	19.93


Remark: See next page for measurement data.

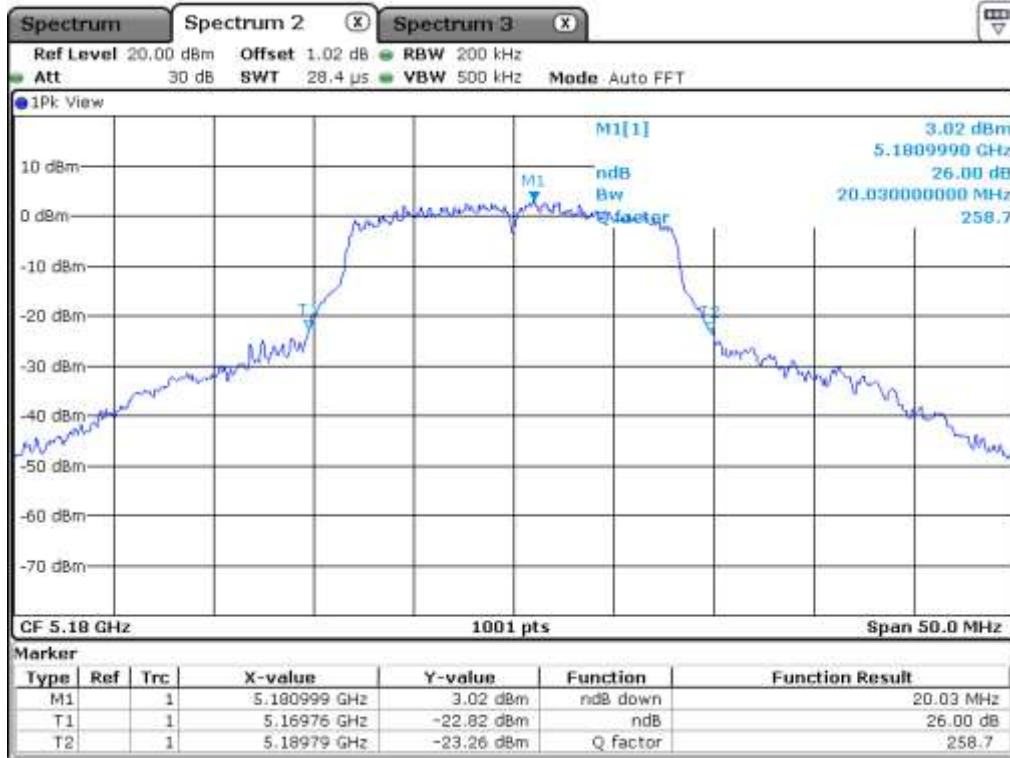


Low Channel (5 180 MHz)

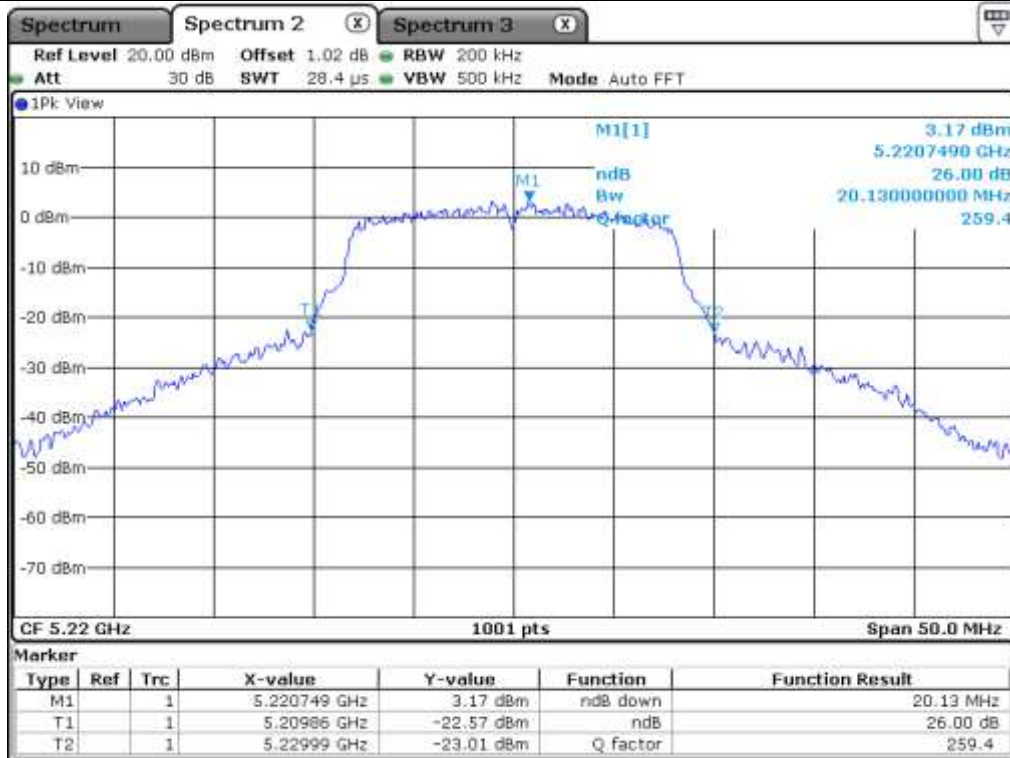


Middle Channel (5 220 MHz)

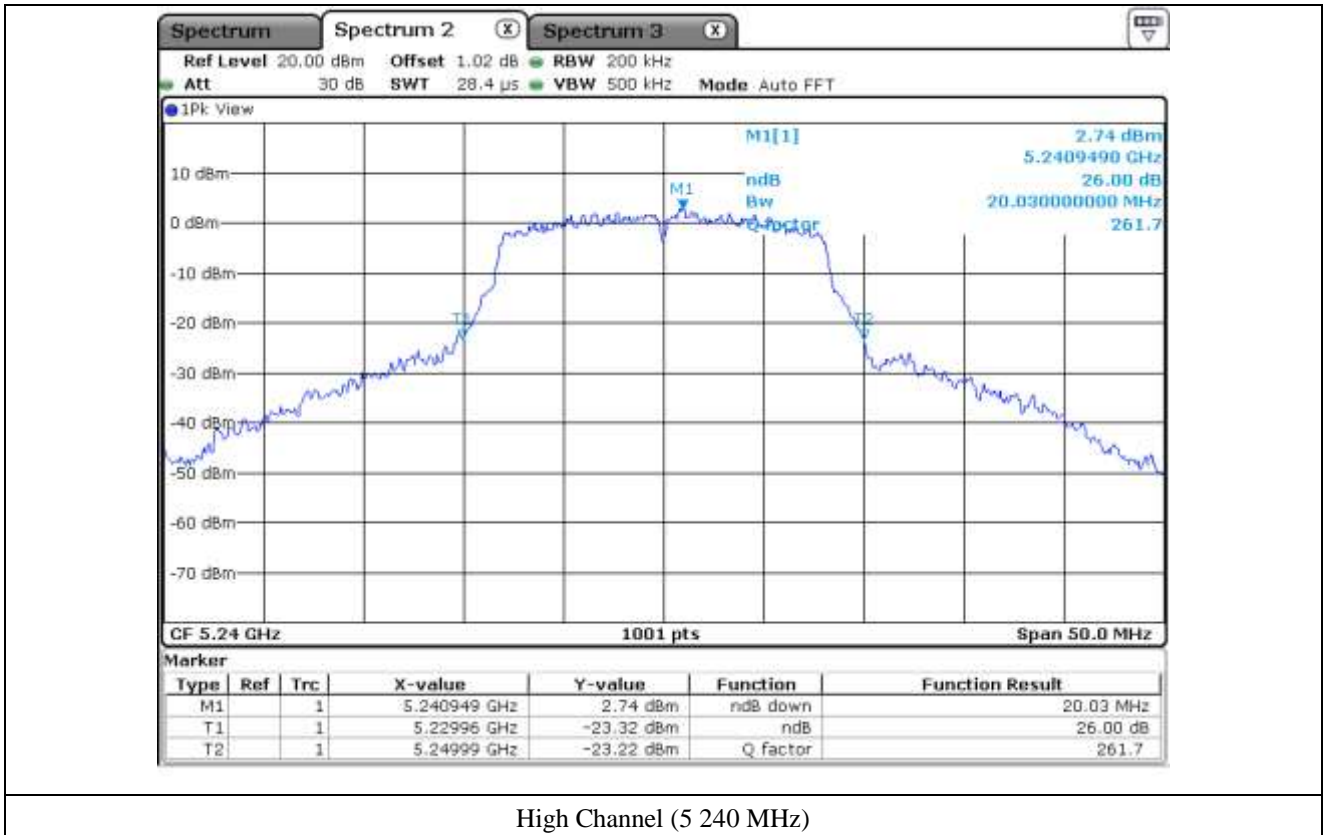


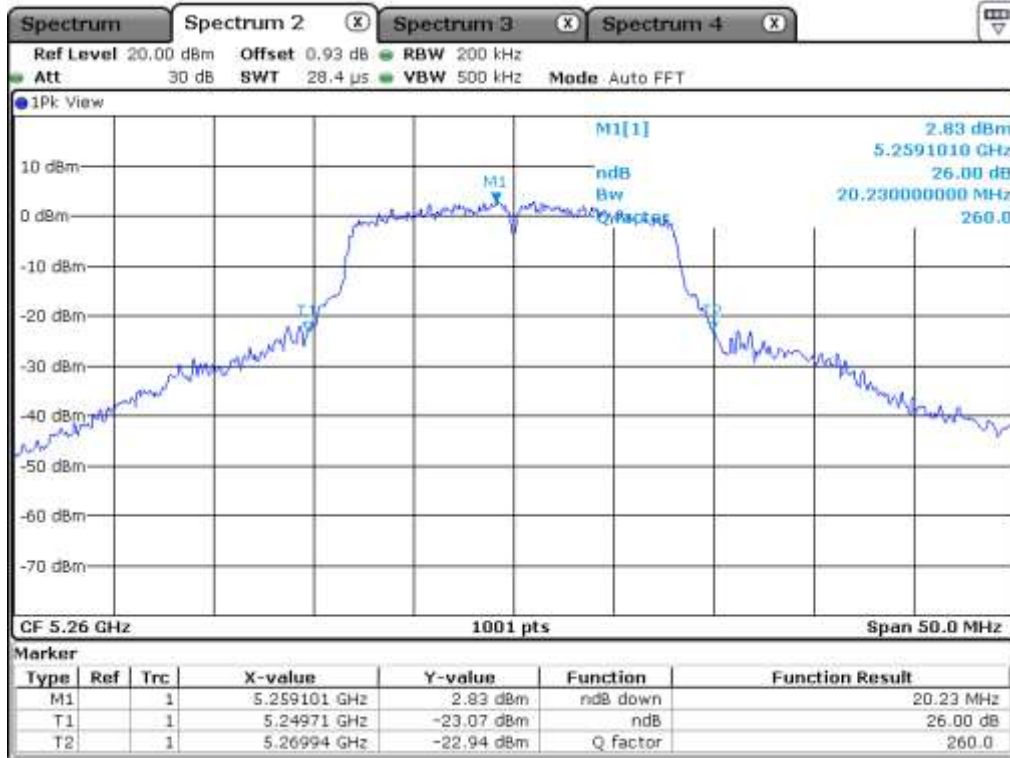


Low Channel (5 260 MHz)

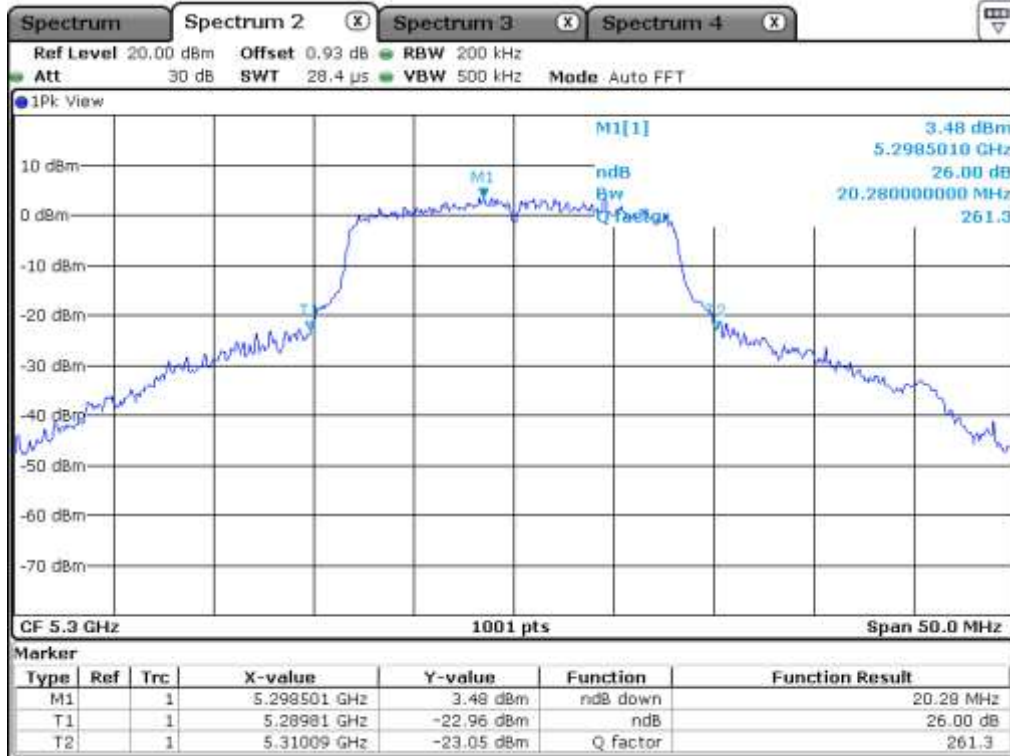


Middle Channel (5 300 MHz)

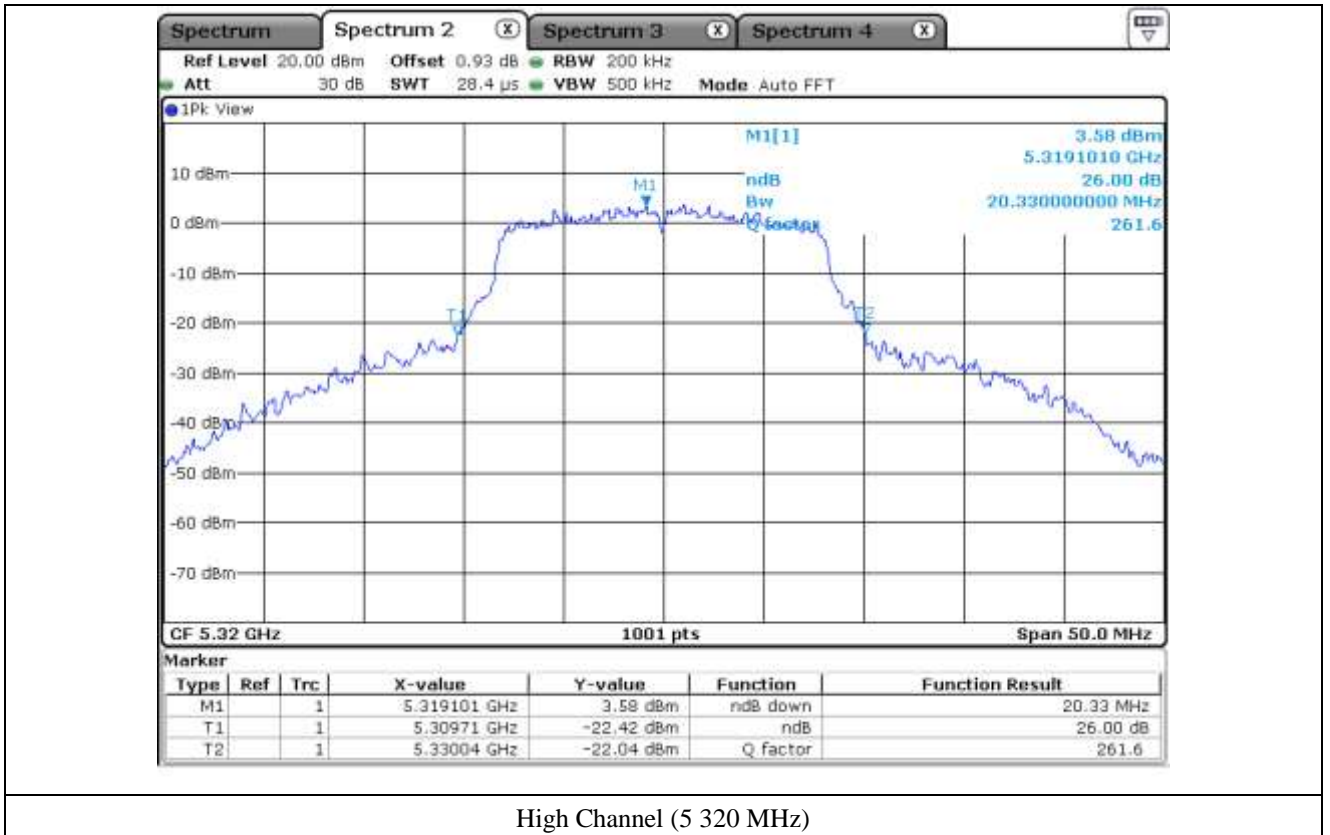


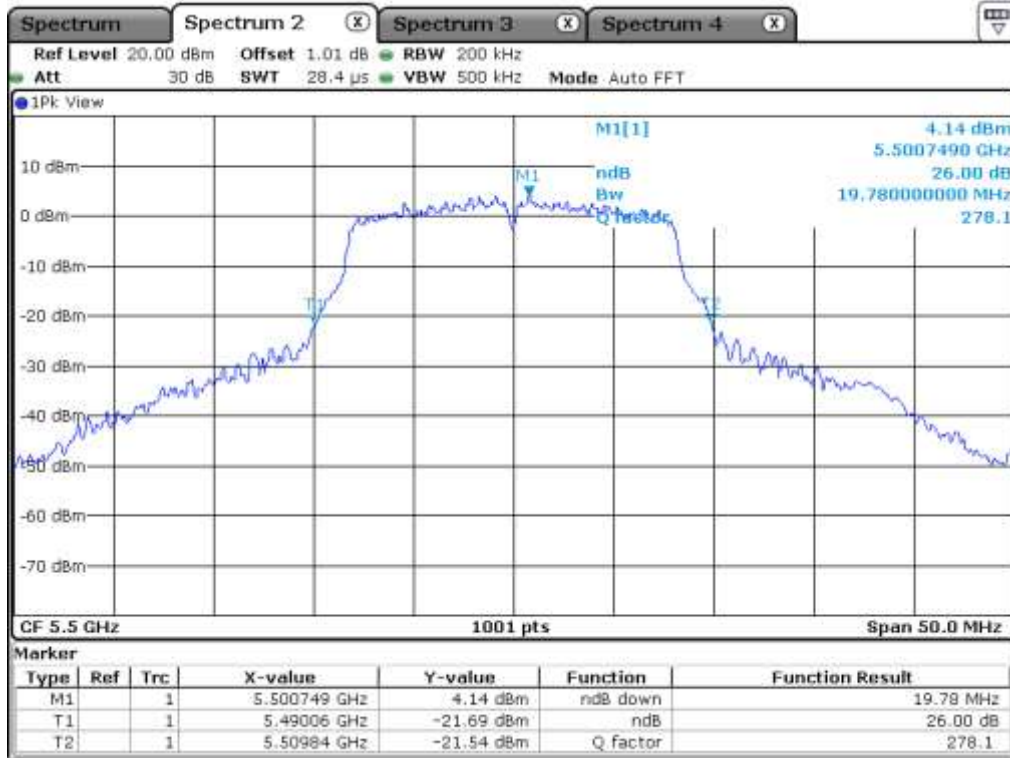


Low Channel (5 500 MHz)

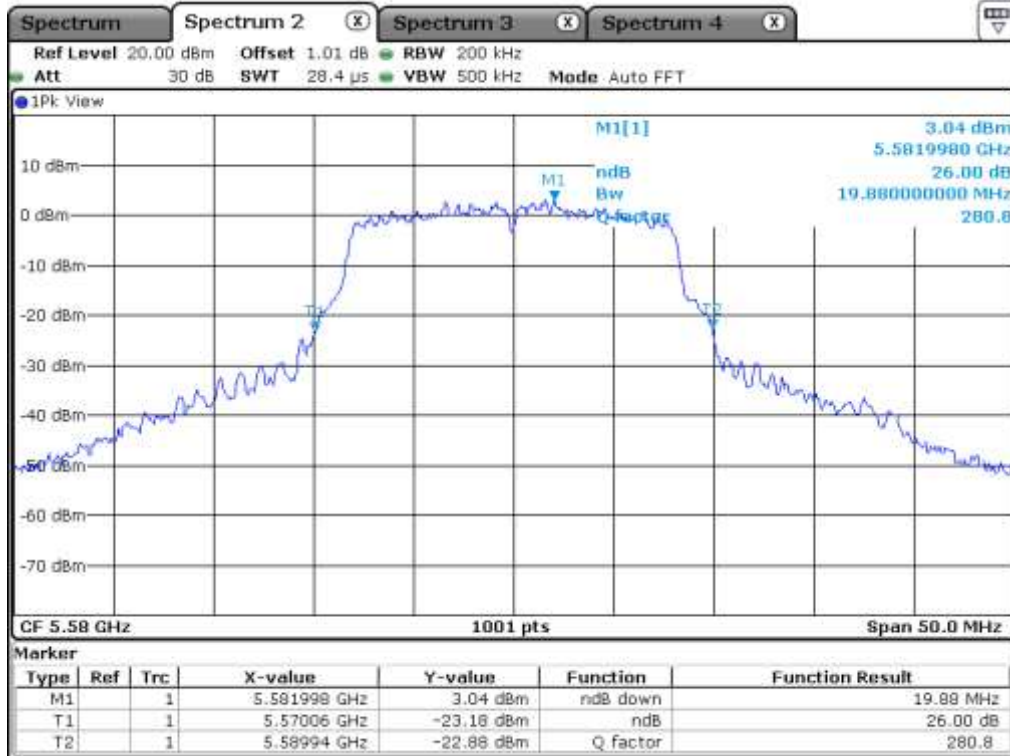


Middle Channel (5 580 MHz)

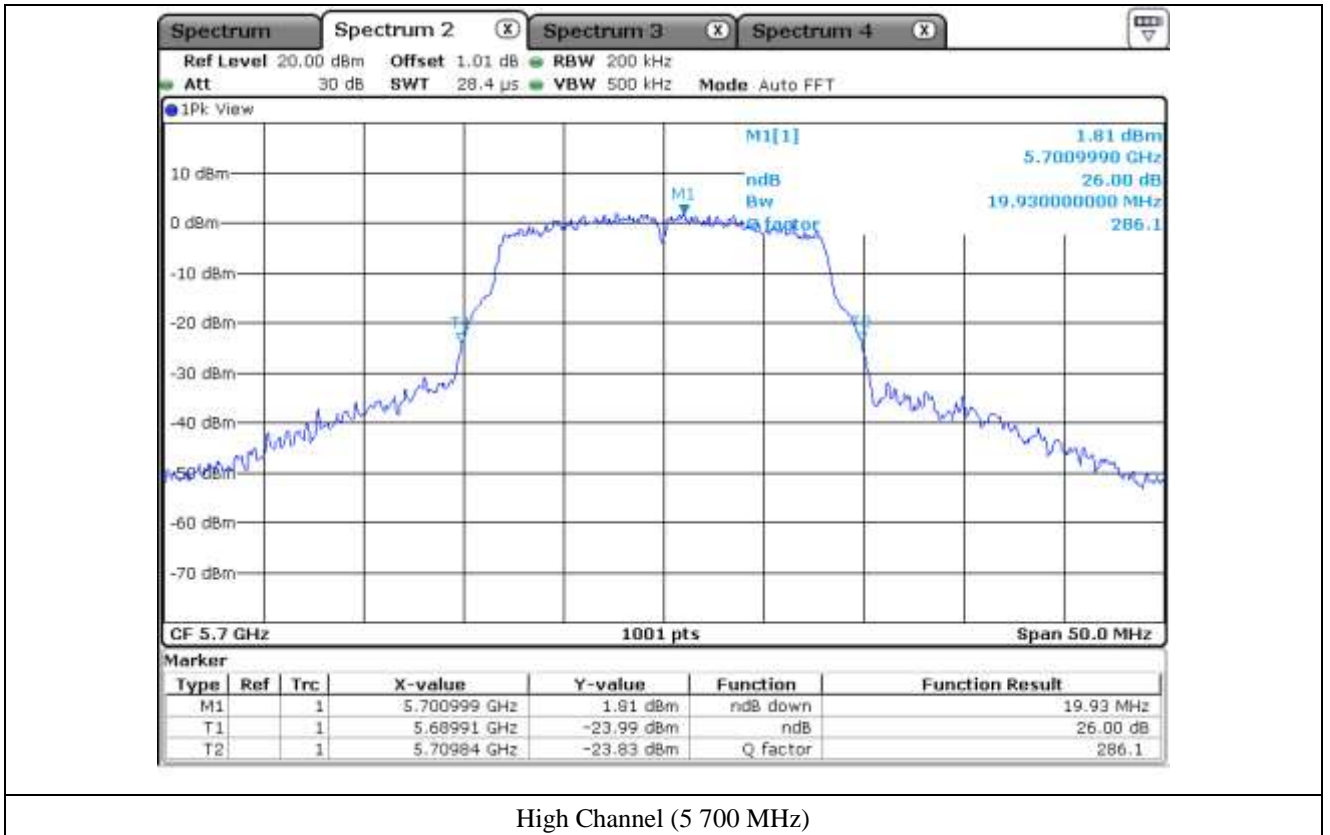


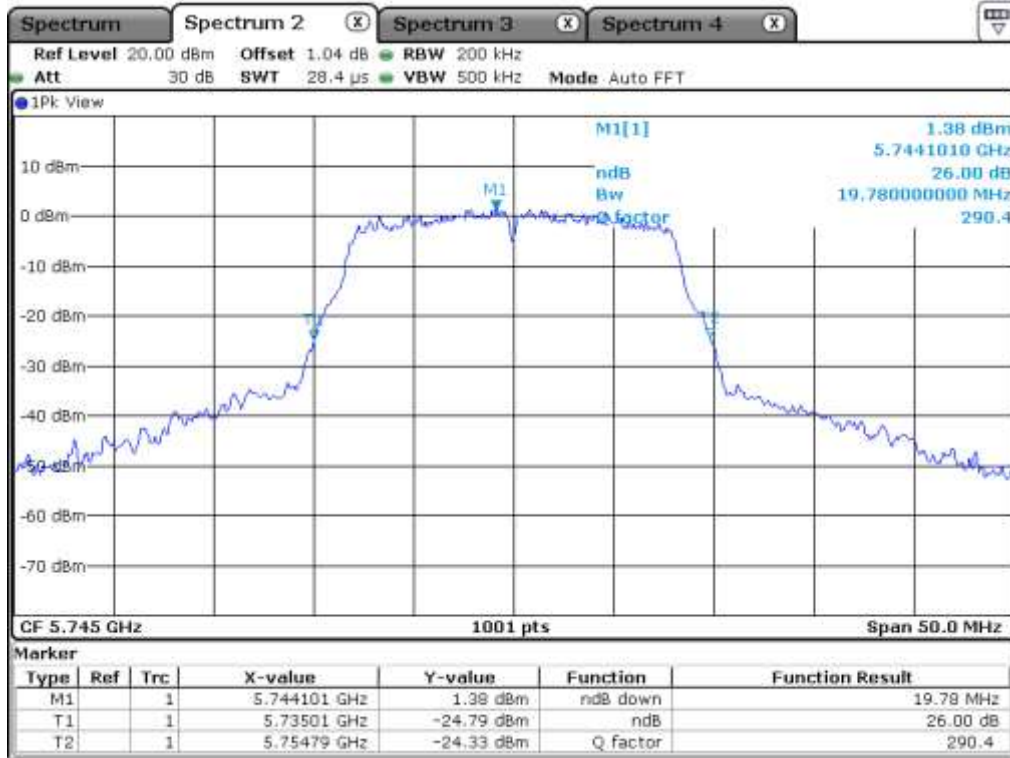

Low Channel (5 745 MHz)

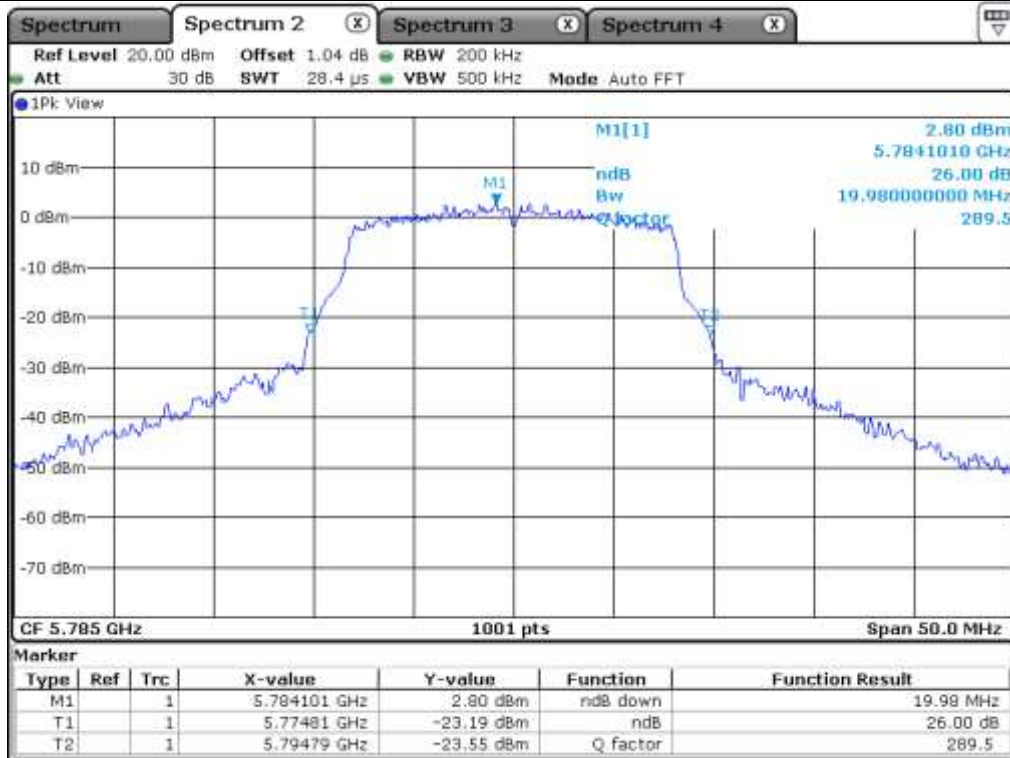

Middle Channel (5 785 MHz)

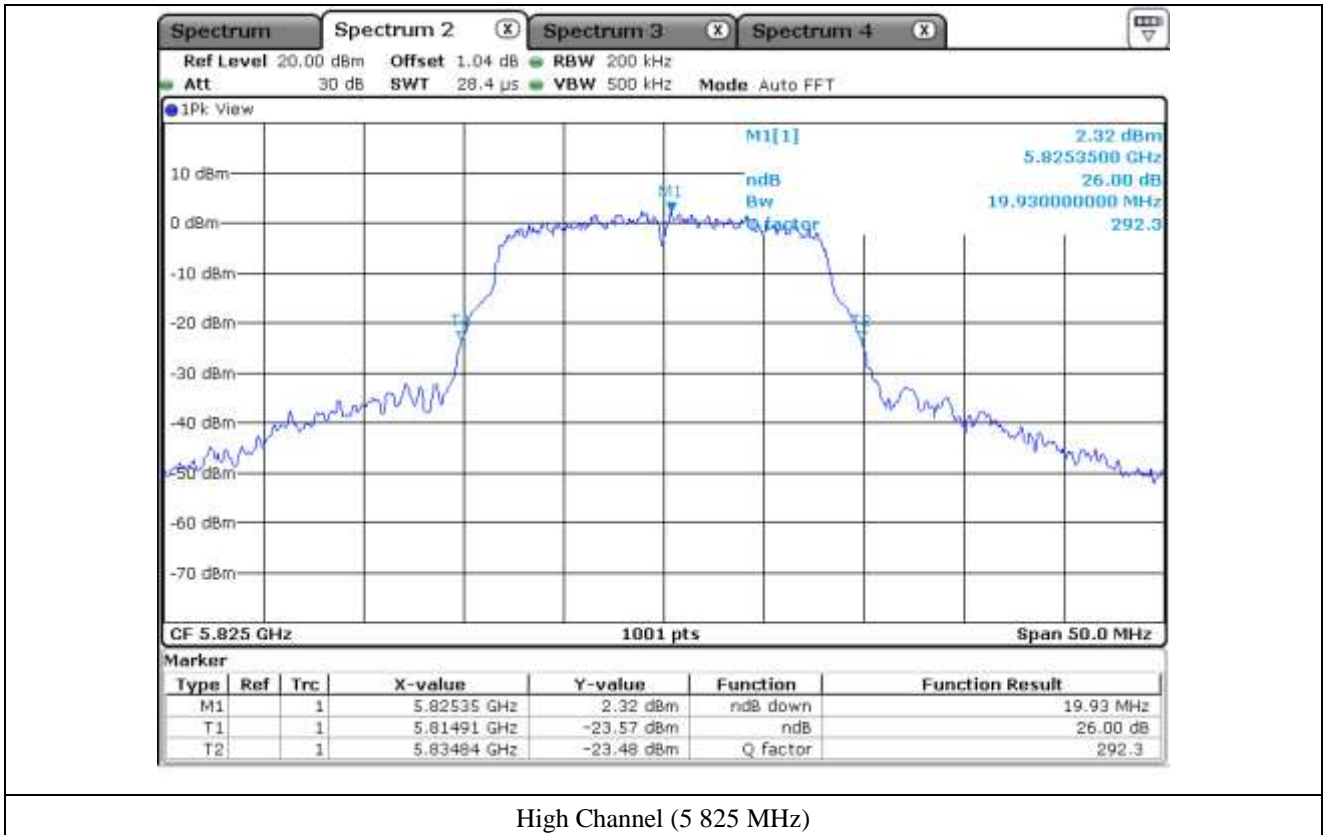


7.4.2 Test data for Antenna 1


-. Test Result : Pass

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	26 dB Bandwidth (MHz)
5 150 ~ 5 250	Low	5 180.00	19.93
	Middle	5 220.00	19.93
	High	5 240.00	20.13
5 250 ~ 5 350	Low	5 260.00	19.78
	Middle	5 300.00	20.03
	High	5 320.00	20.08
5 470 ~ 5 725	Low	5 500.00	20.18
	Middle	5 580.00	19.78
	High	5 700.00	19.88
5 725 ~ 5 850	Low	5 745.00	19.73
	Middle	5 785.00	19.63
	High	5 825.00	19.68


Remark: See next page for measurement data.

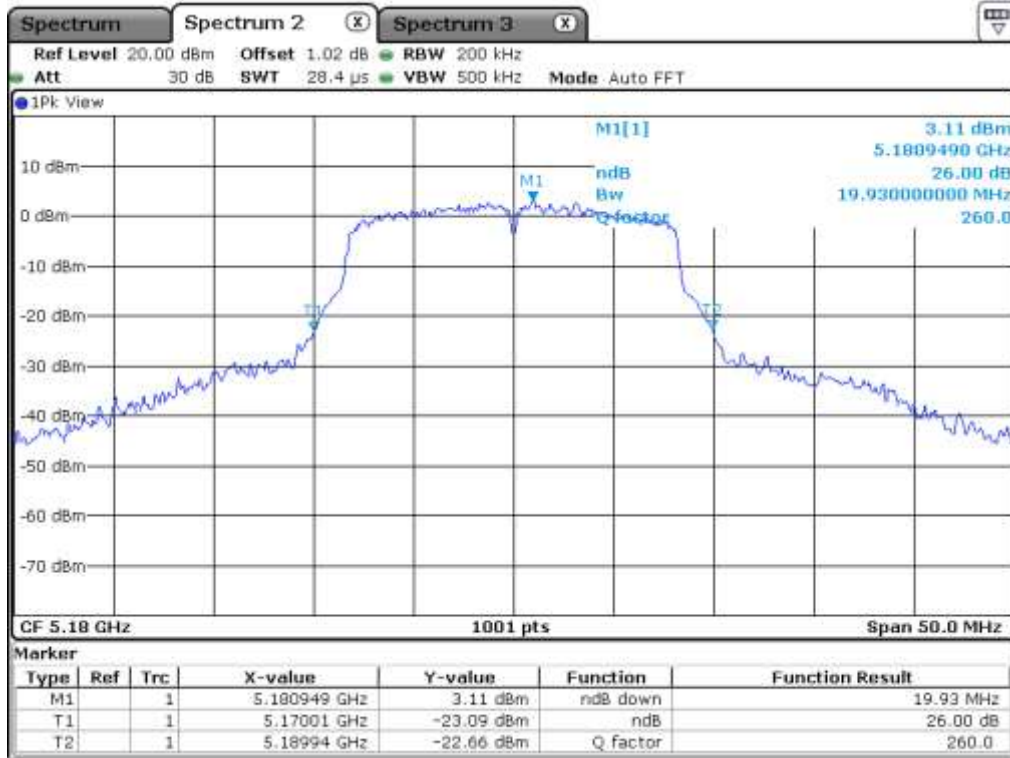


Low Channel (5 180 MHz)

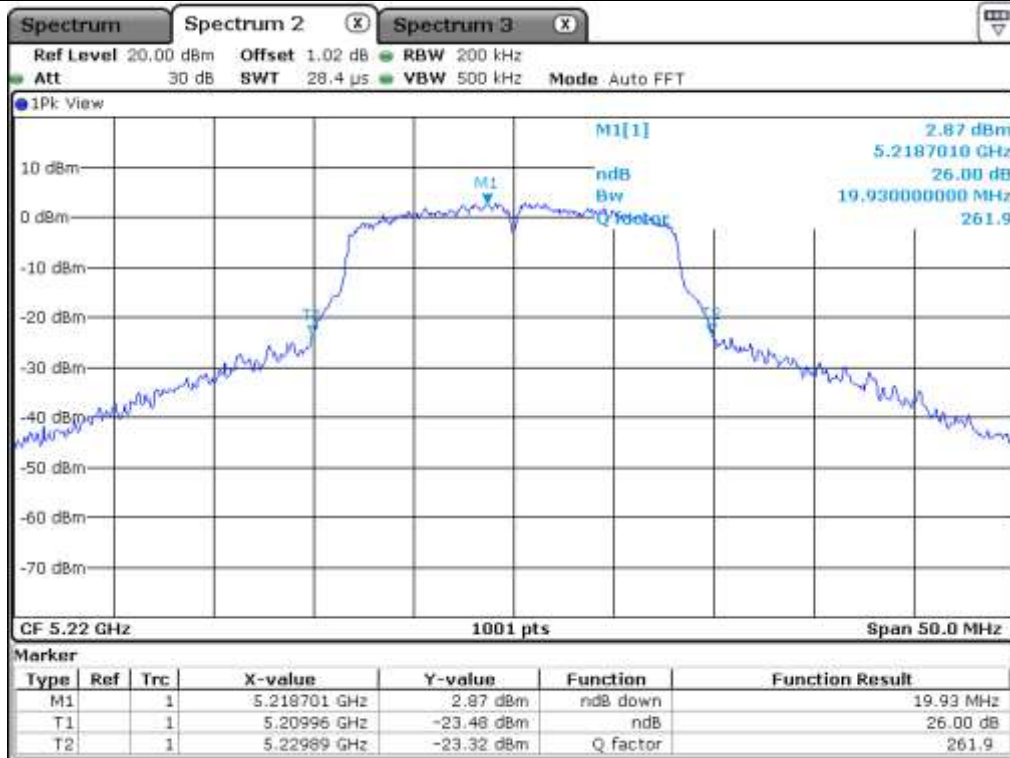


Middle Channel (5 220 MHz)

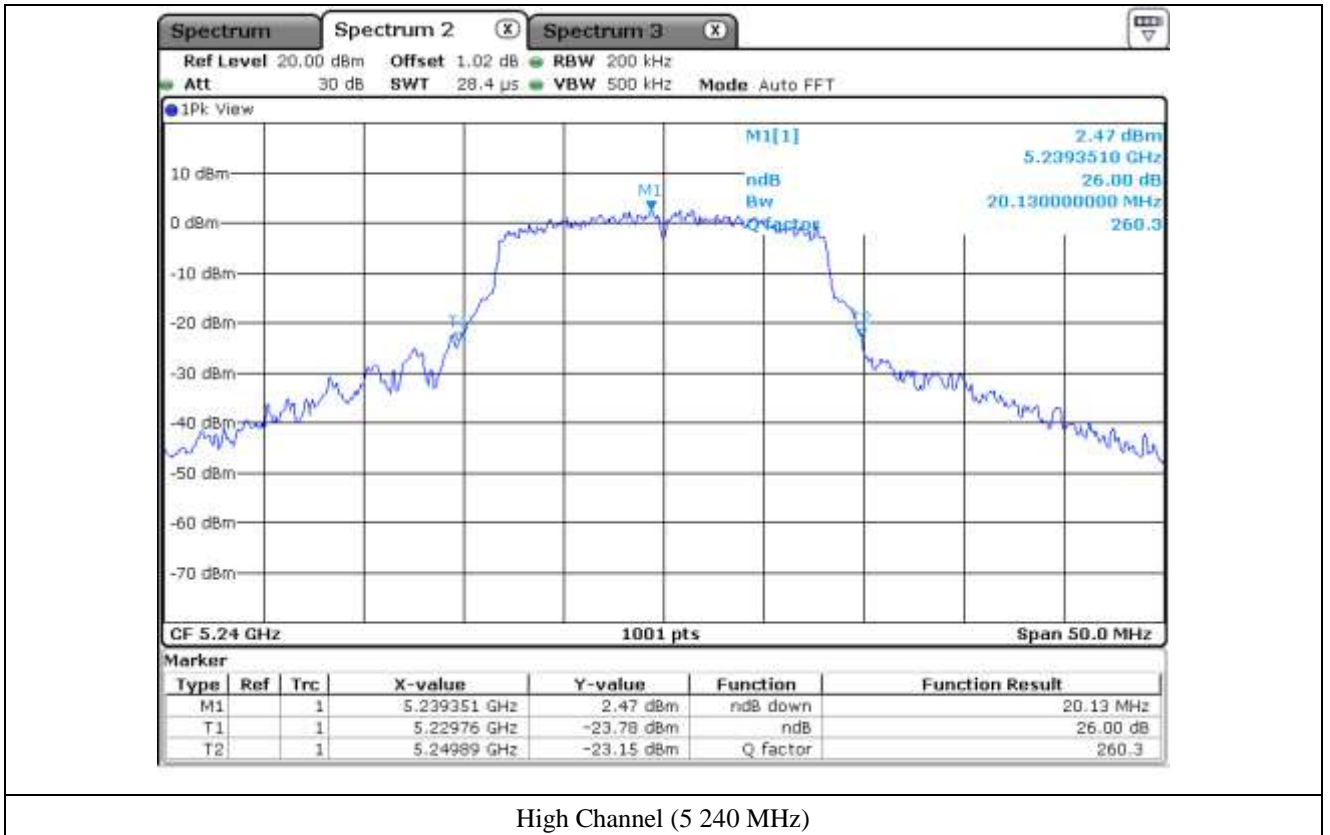


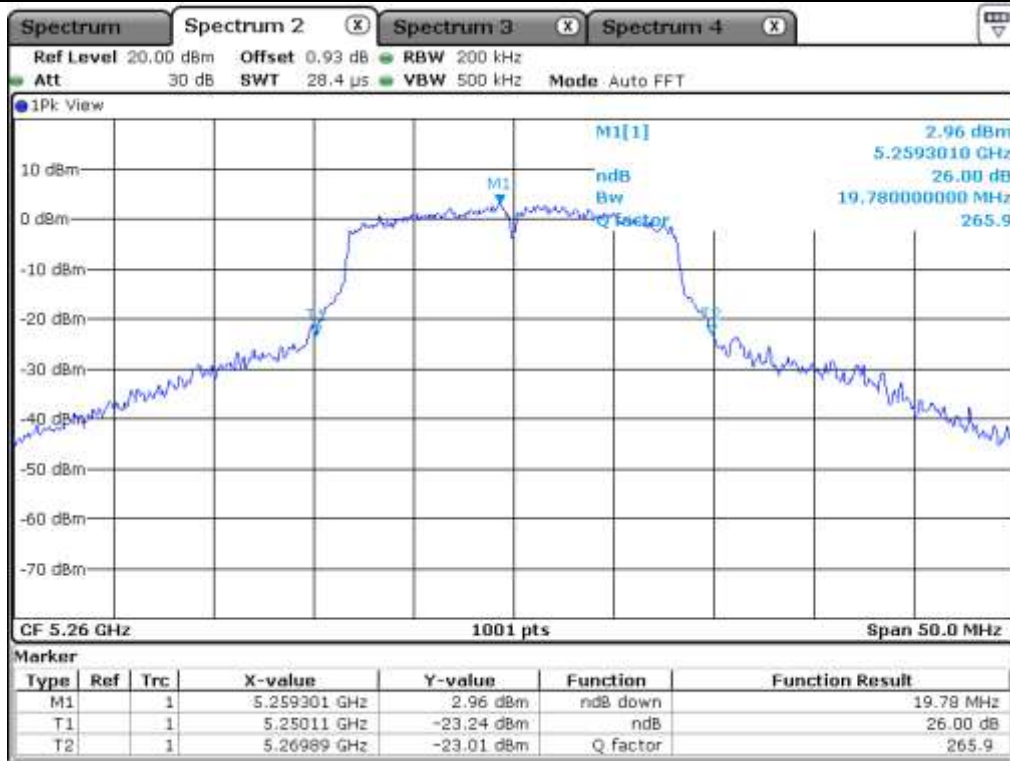


Low Channel (5 260 MHz)

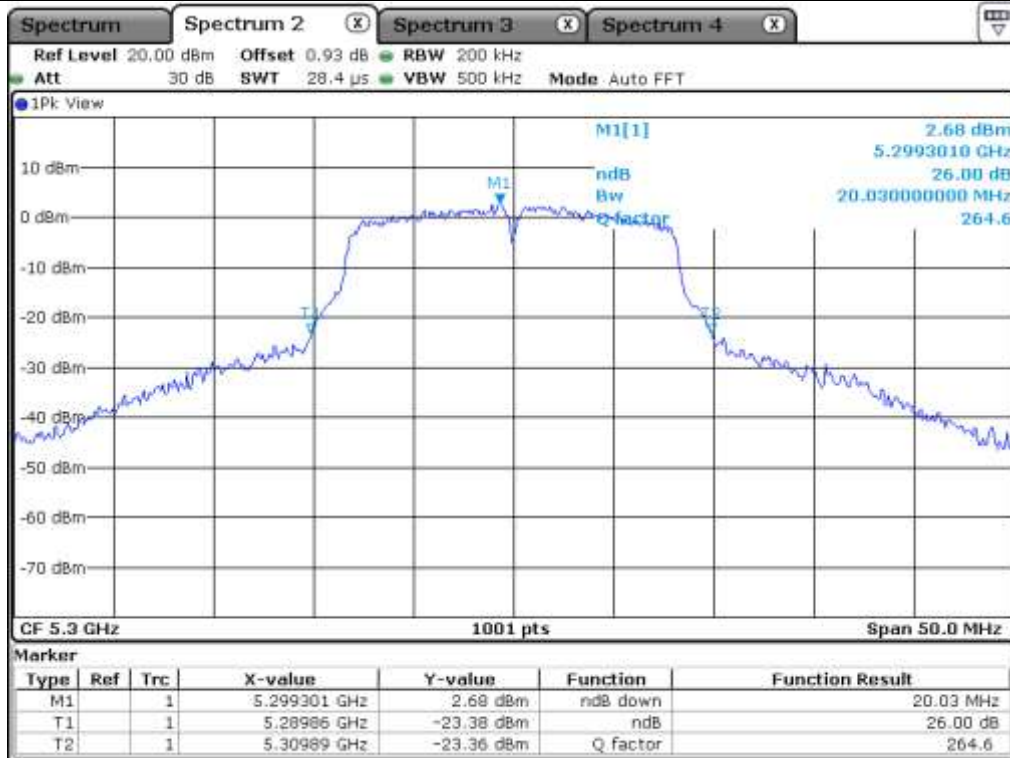


Middle Channel (5 300 MHz)

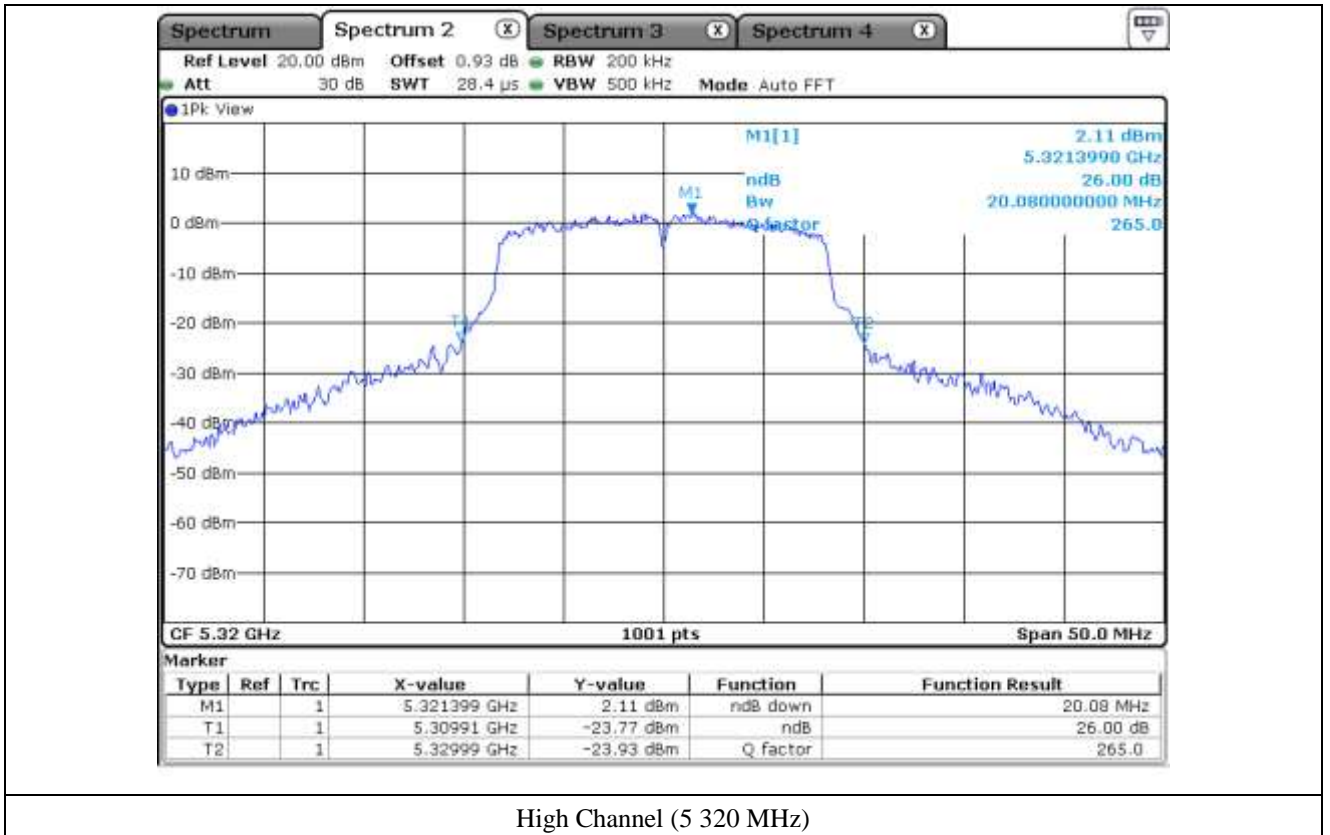


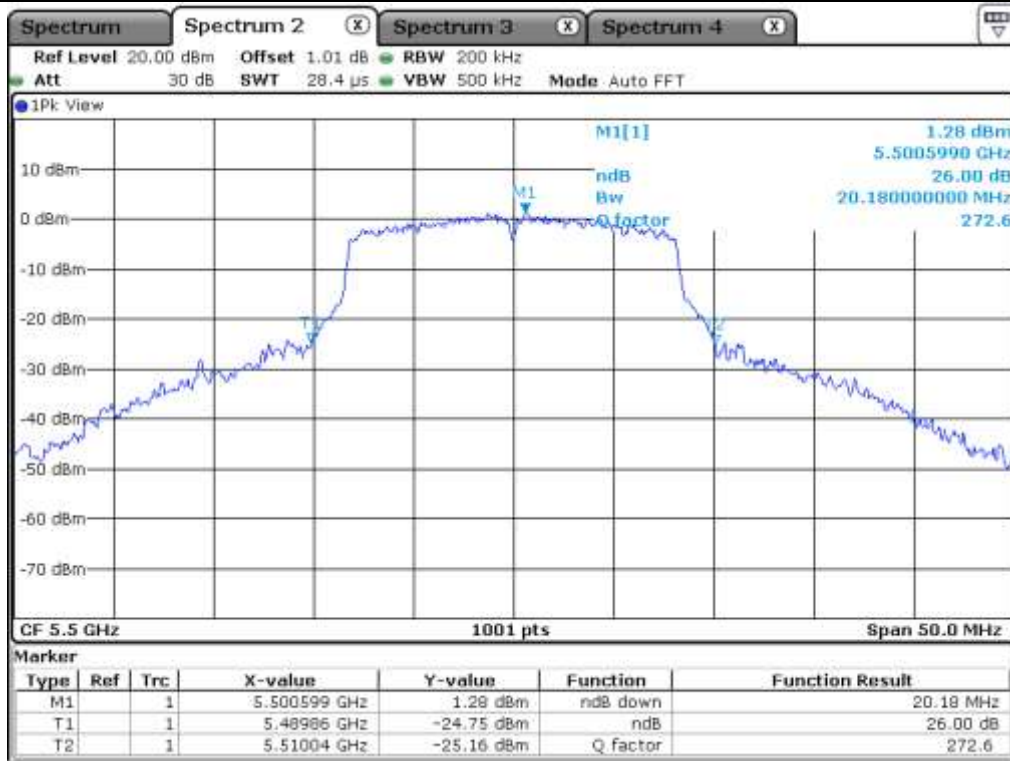


Low Channel (5 500 MHz)

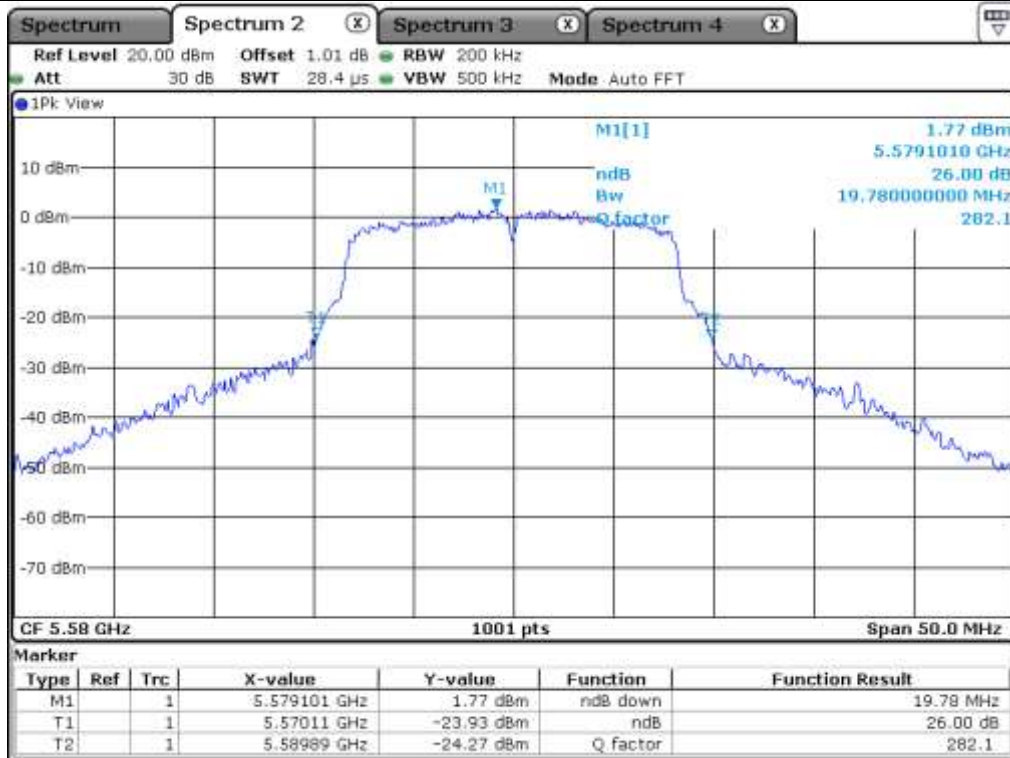


Middle Channel (5 580 MHz)

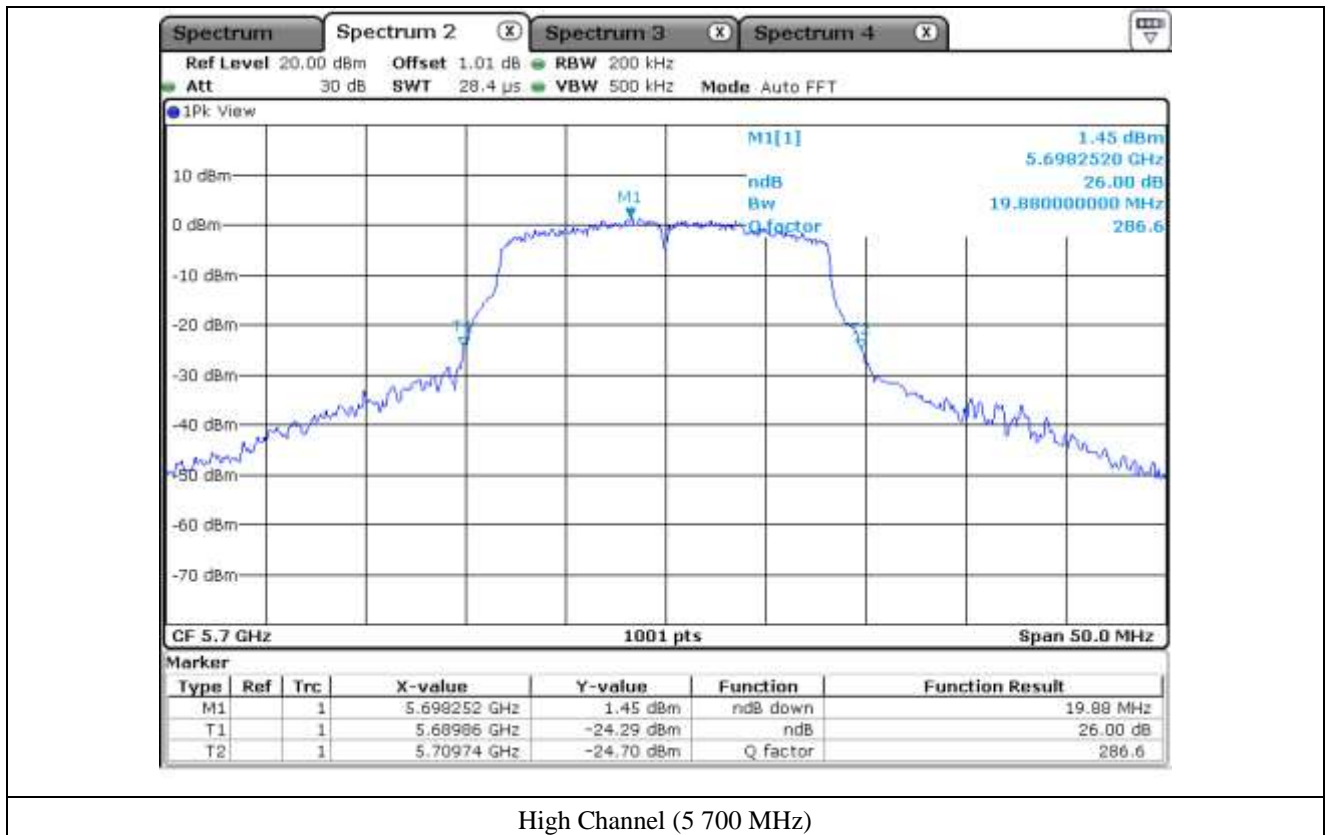


High Channel (5 700 MHz)

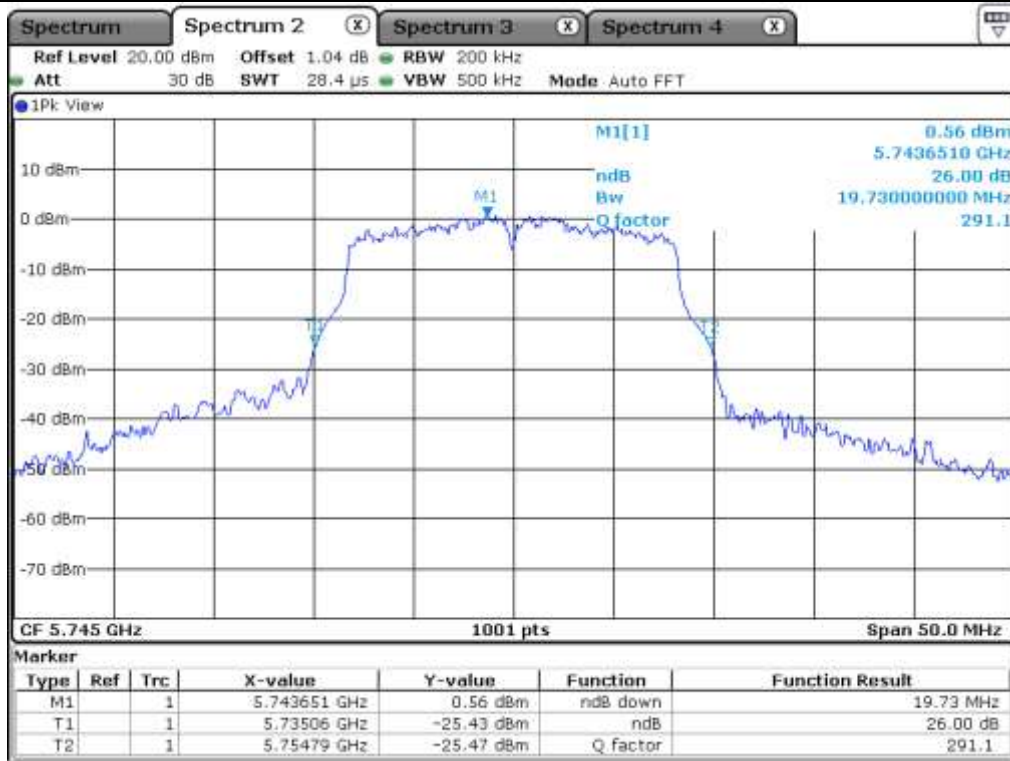

Low Channel (5.745 MHz)

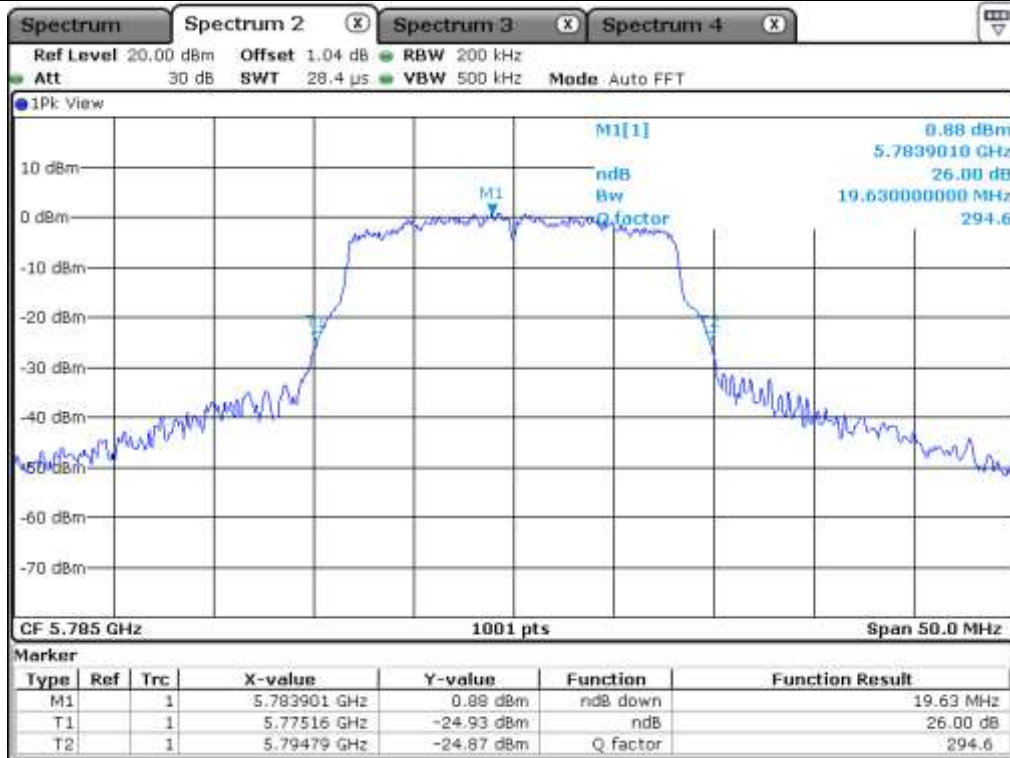


Middle Channel (5.785 MHz)

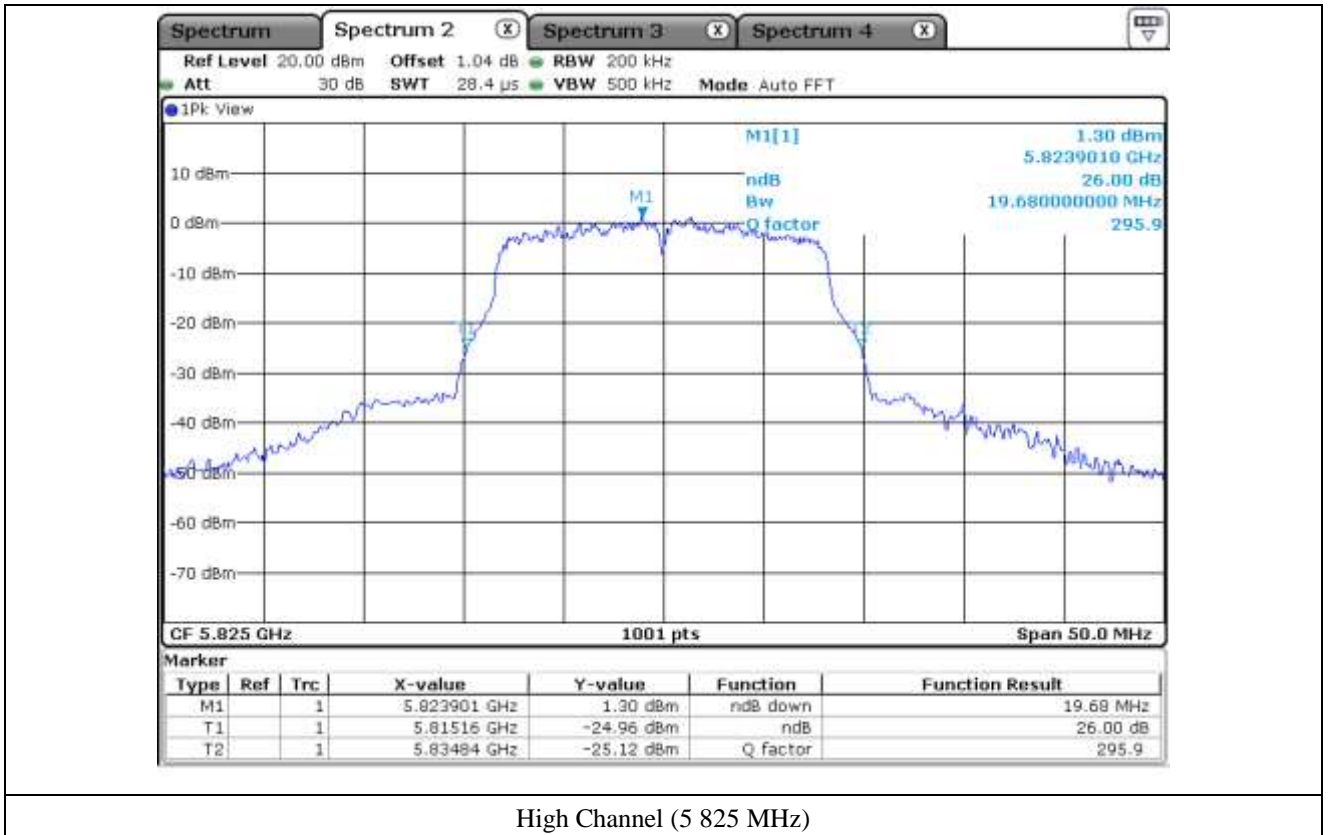

7.4.3 Test data for Staddle Channel_Antenna 0

-. Test Result : Pass


FREQUENCY RANGE (MHz)	FREQUENCY (MHz)	26 dB Bandwidth (MHz)
5 470 ~ 5 725	5 720.00	14.89
5 725 ~ 5 850	5 720.00	4.94

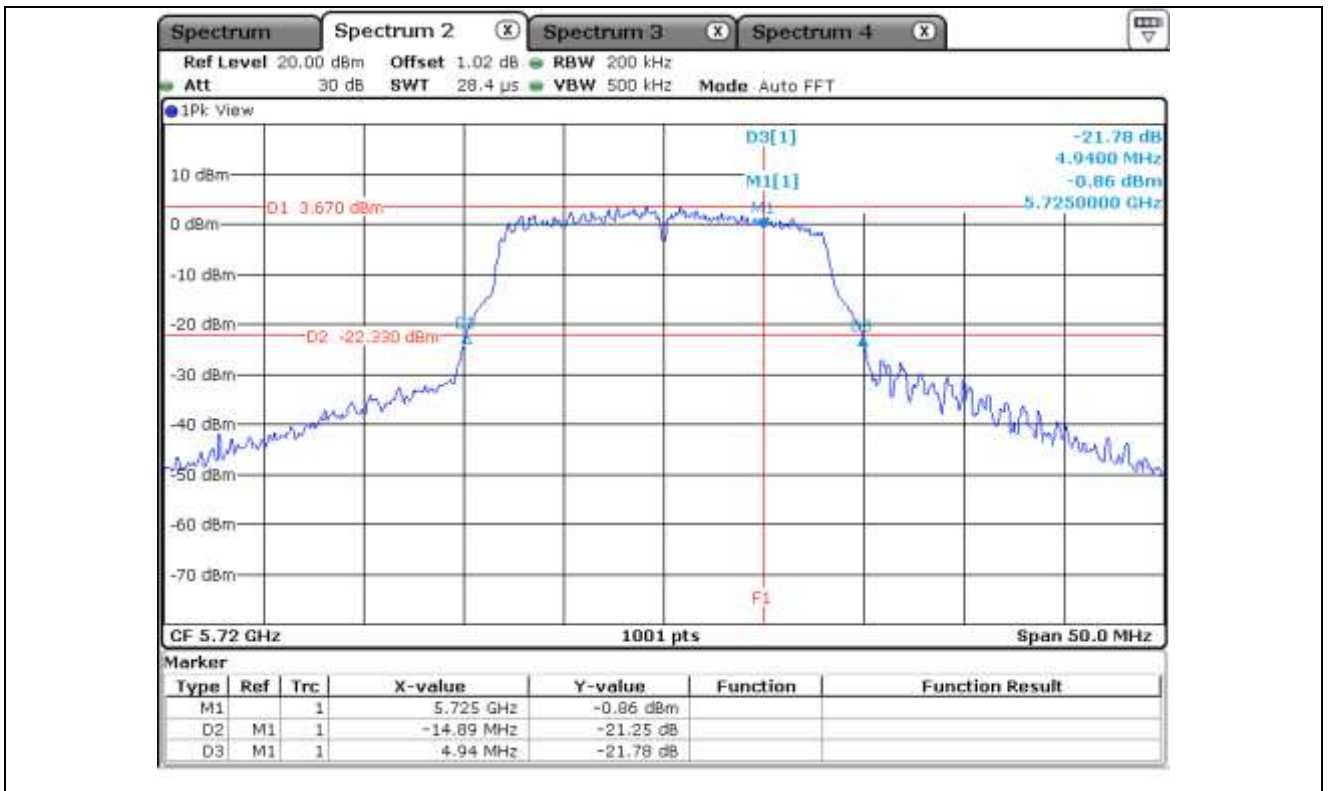

7.4.4 Test data for Staddle Channel_Antenna 1

-. Test Result : Pass

FREQUENCY RANGE (MHz)	FREQUENCY (MHz)	26 dB Bandwidth (MHz)
5 470 ~ 5 725	5 720.00	15.09
5 725 ~ 5 850	5 720.00	4.84

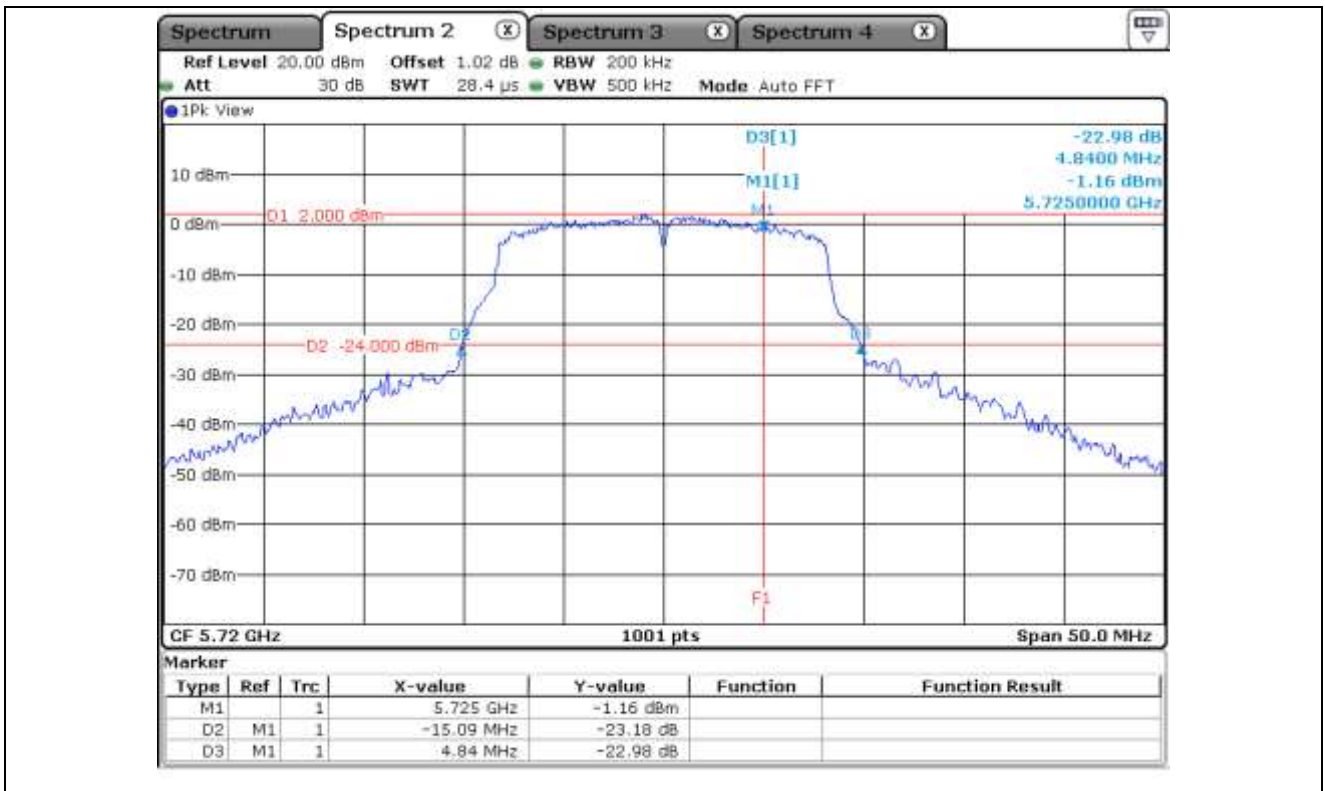


7.5 Test data for 802.11n_HT20 RLAN Mode

7.5.1 Test data for Antenna 0


-. Test Result : Pass

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	26 dB Bandwidth (MHz)
5 150 ~ 5 250	Low	5 180.00	20.38
	Middle	5 220.00	20.33
	High	5 240.00	20.18
5 250 ~ 5 350	Low	5 260.00	20.08
	Middle	5 300.00	20.28
	High	5 320.00	20.38
5 470 ~ 5 725	Low	5 500.00	19.93
	Middle	5 580.00	19.93
	High	5 700.00	20.08
5 725 ~ 5 850	Low	5 745.00	19.98
	Middle	5 785.00	20.23
	High	5 825.00	20.08


Remark: See next page for measurement data.

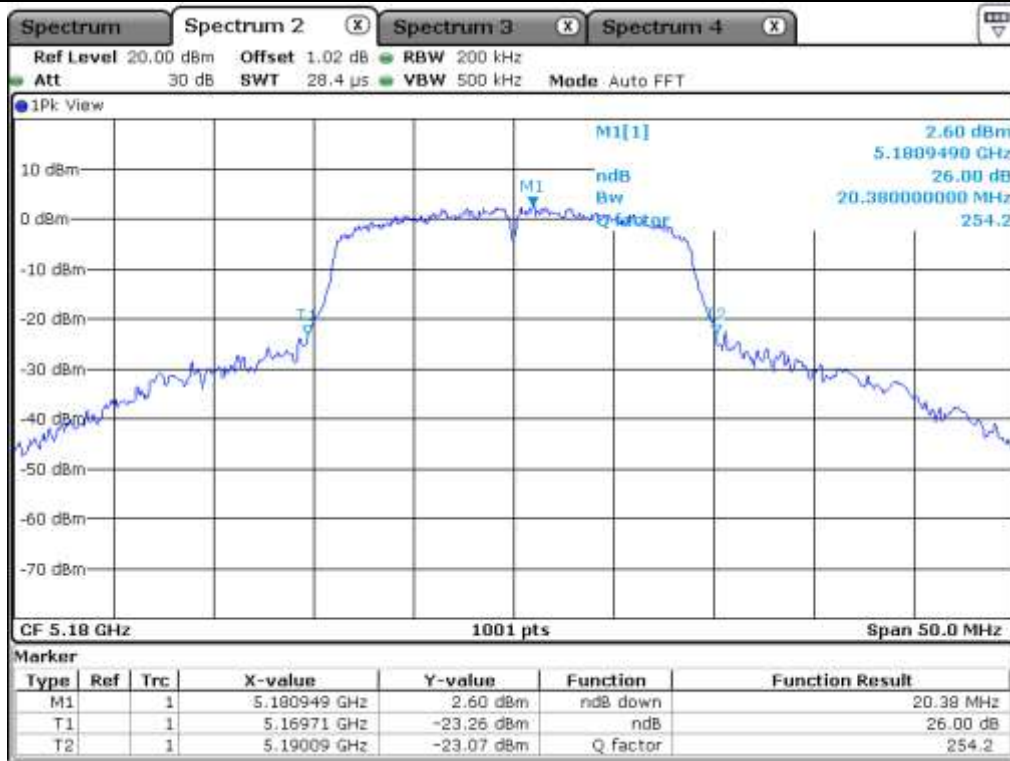


Low Channel (5 180 MHz)

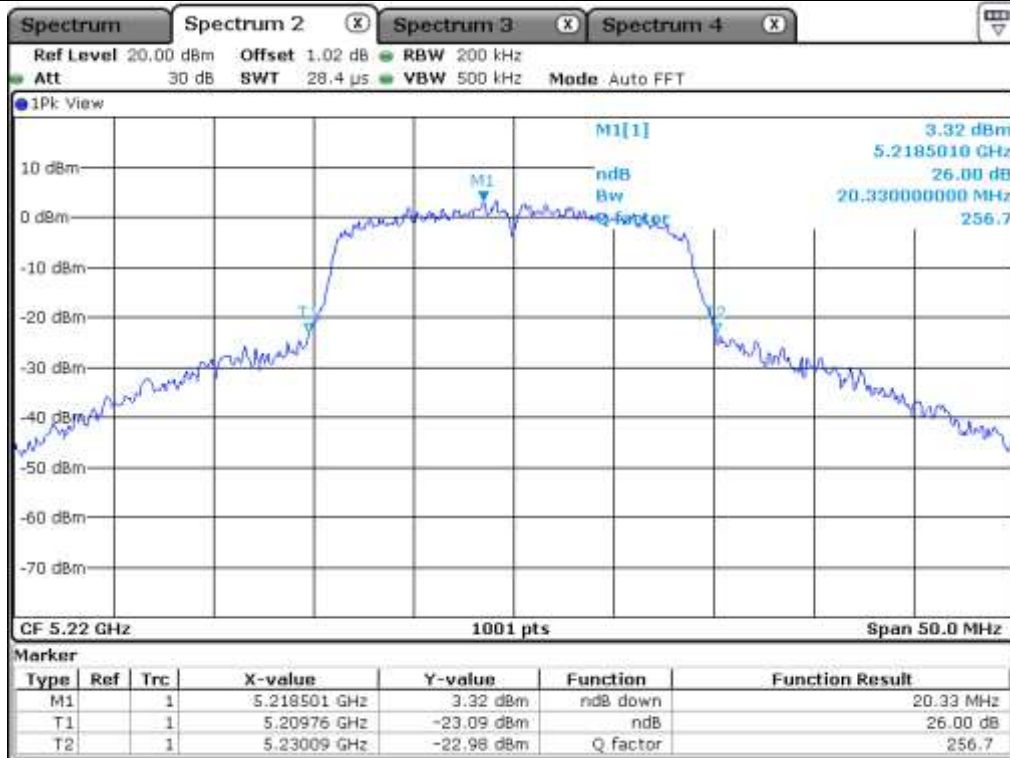


Middle Channel (5 220 MHz)

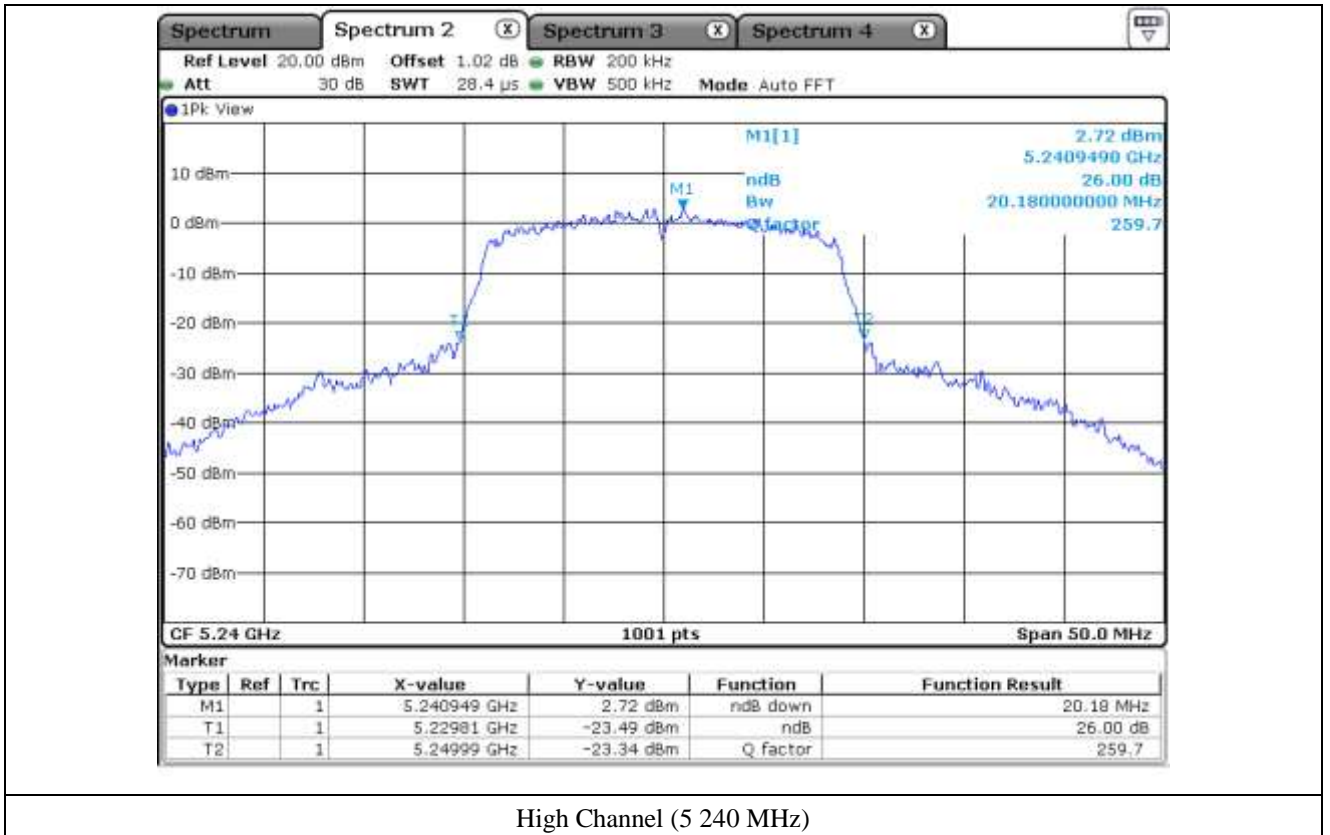


High Channel (5 240 MHz)

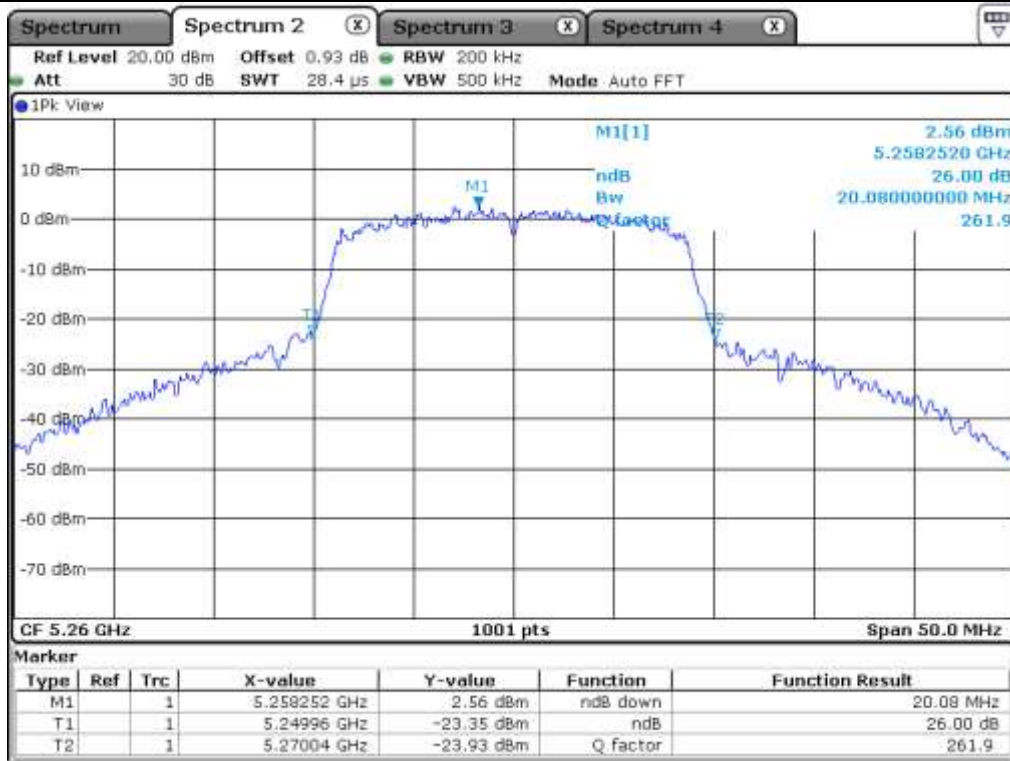


Low Channel (5 260 MHz)

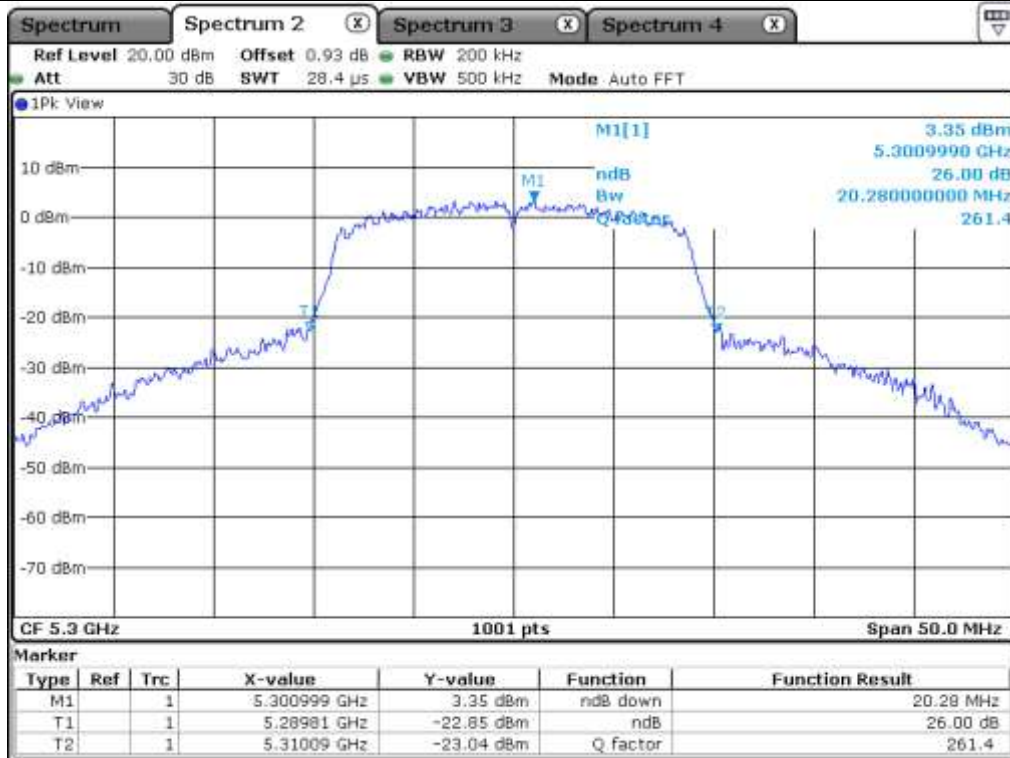


Middle Channel (5 300 MHz)

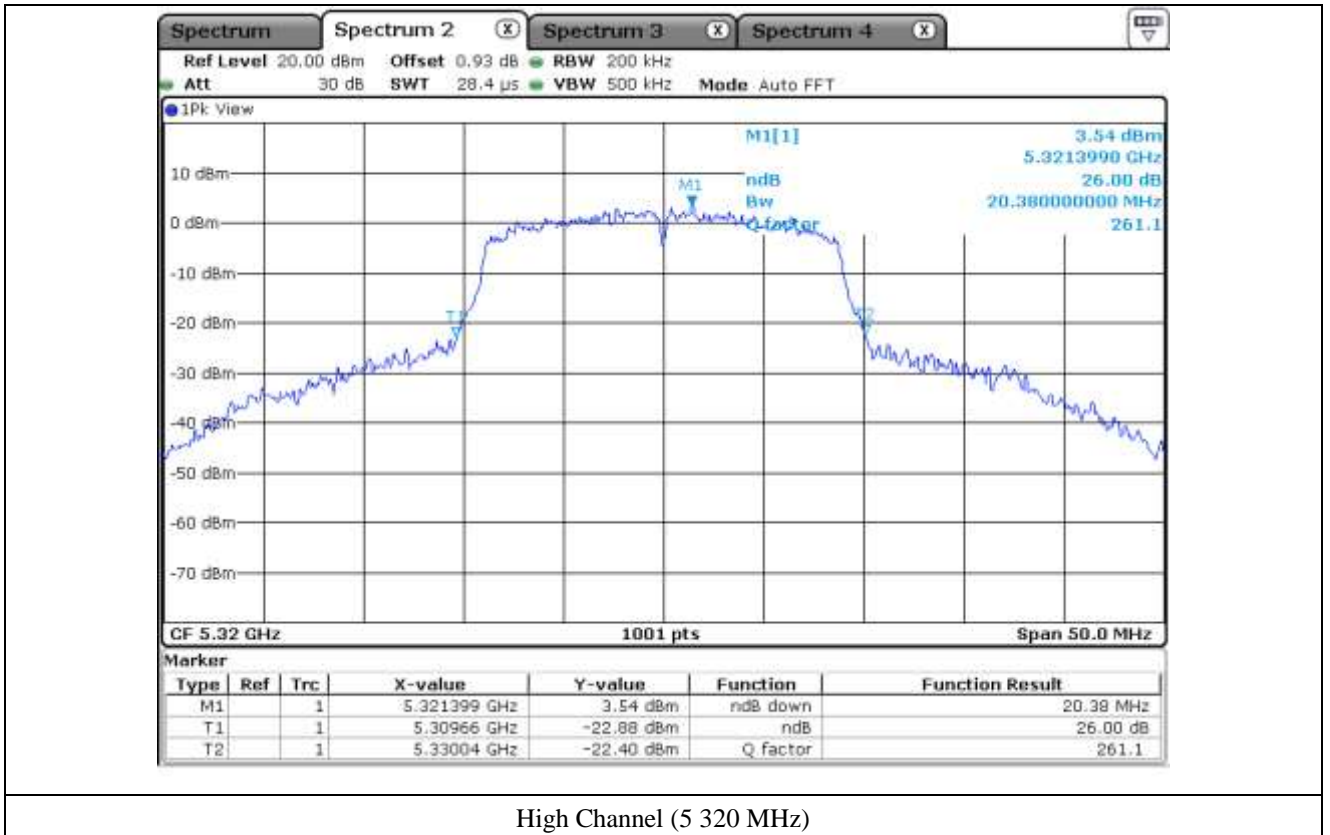


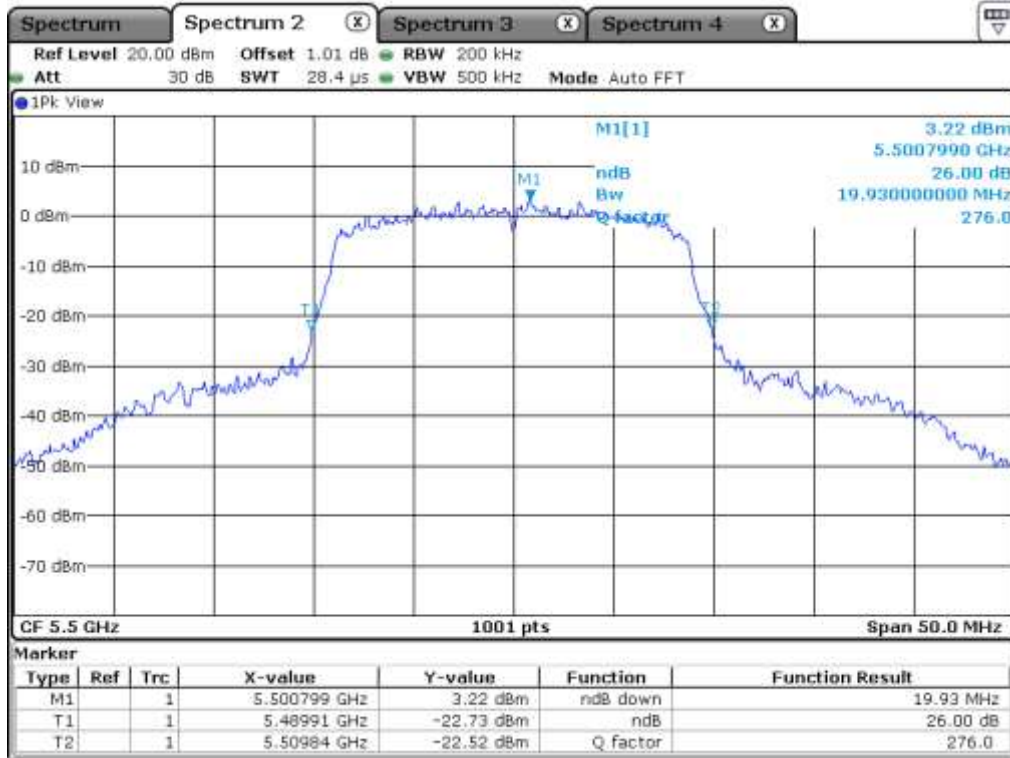


Low Channel (5 500 MHz)

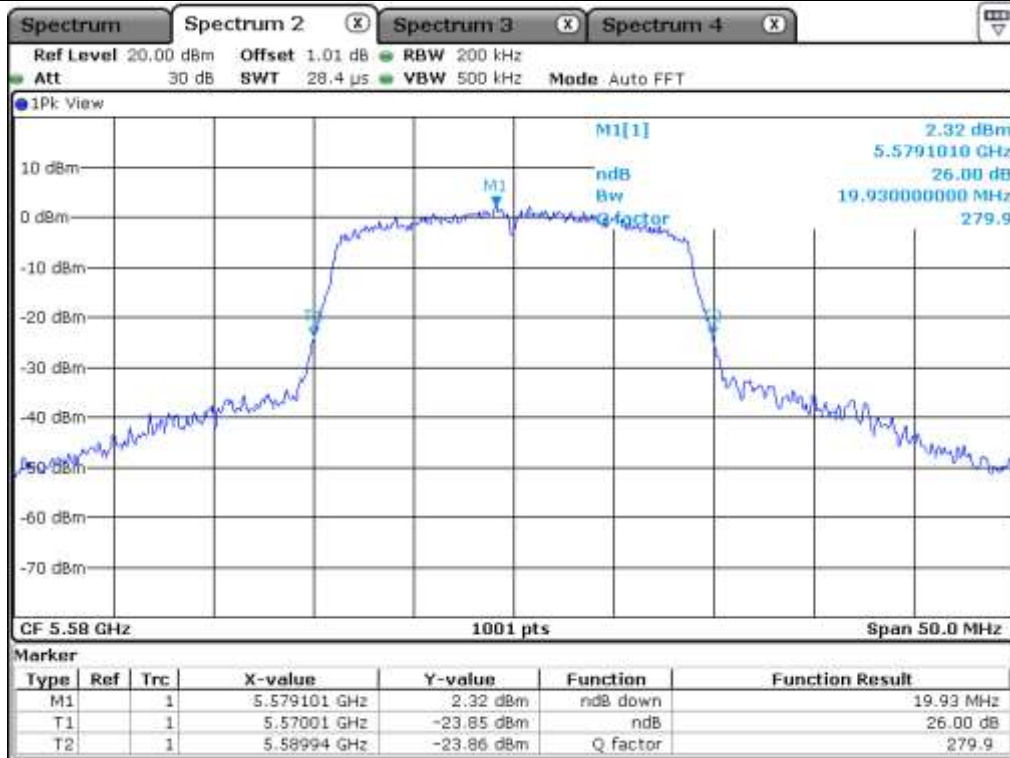


Middle Channel (5 580 MHz)

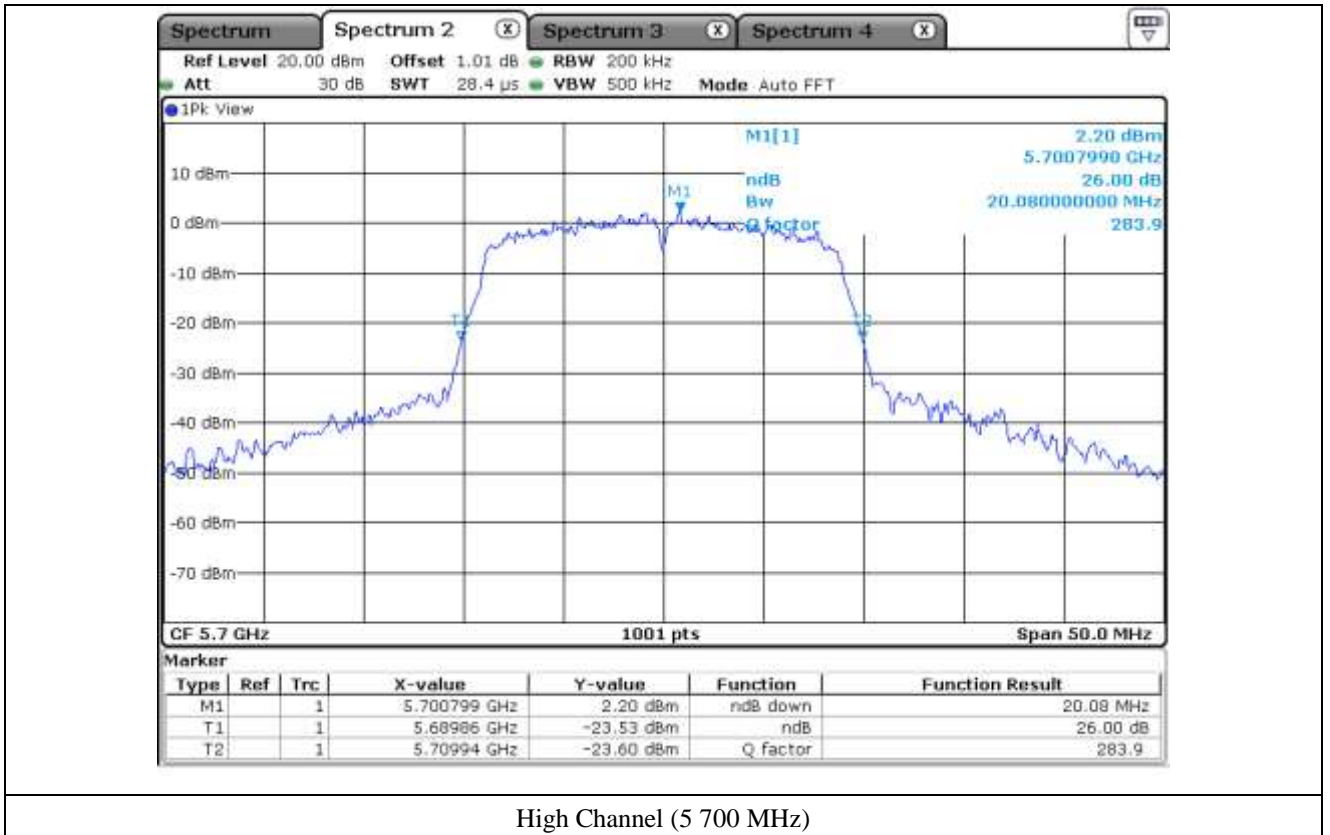


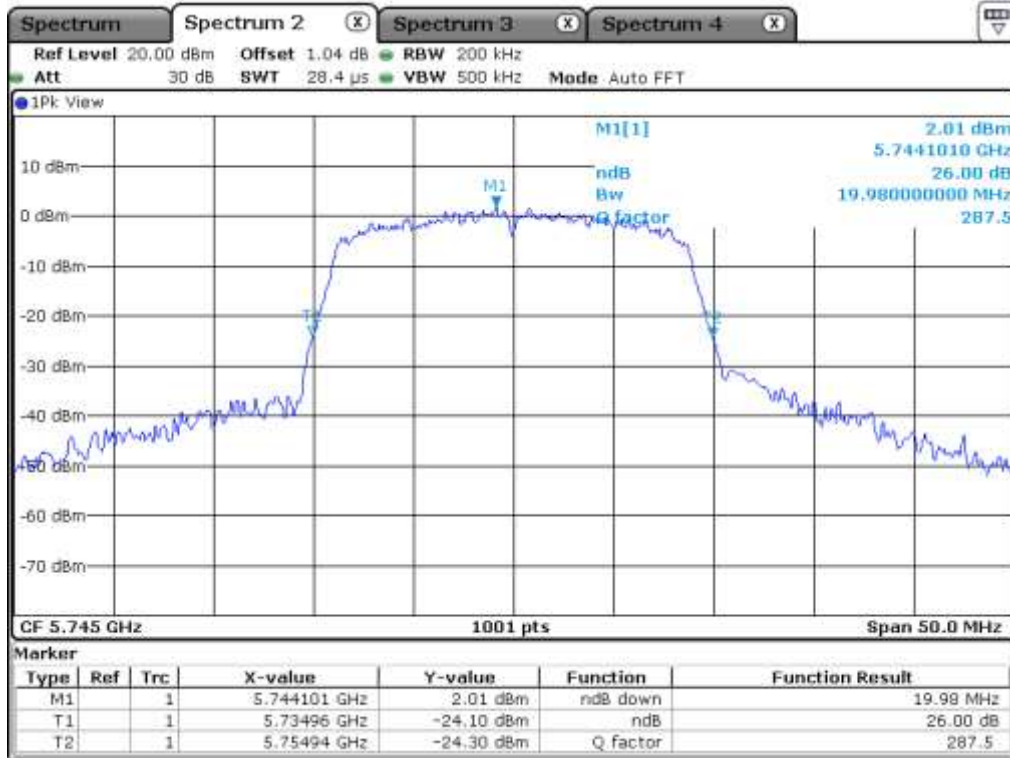

Low Channel (5 745 MHz)

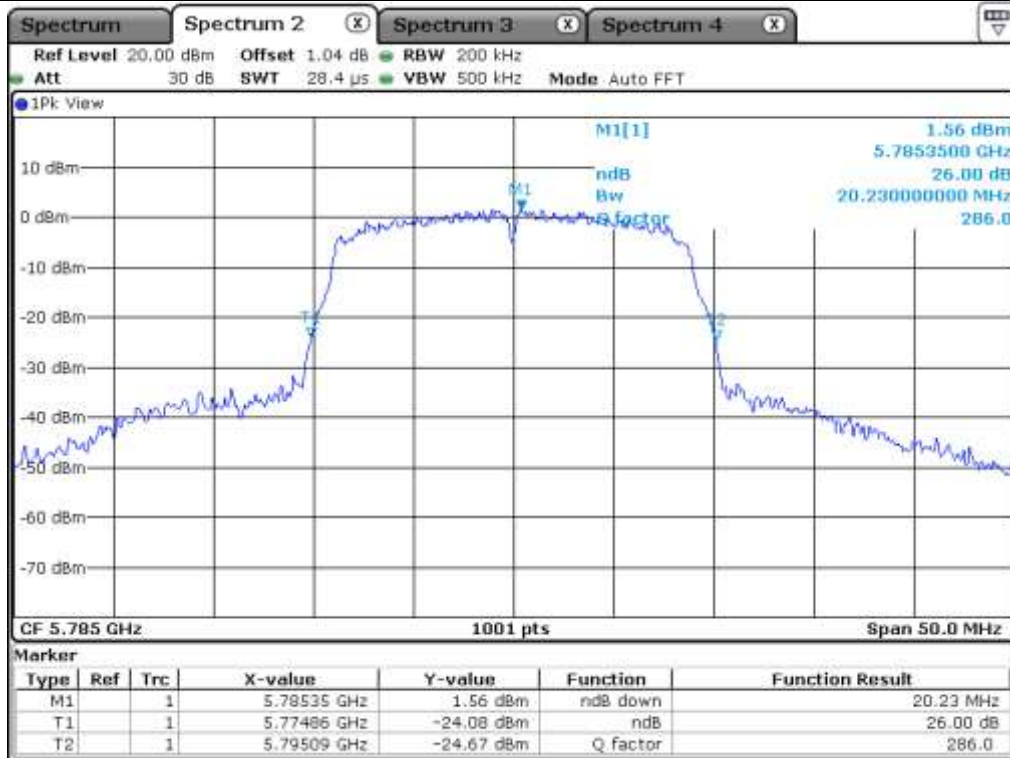

Middle Channel (5 785 MHz)

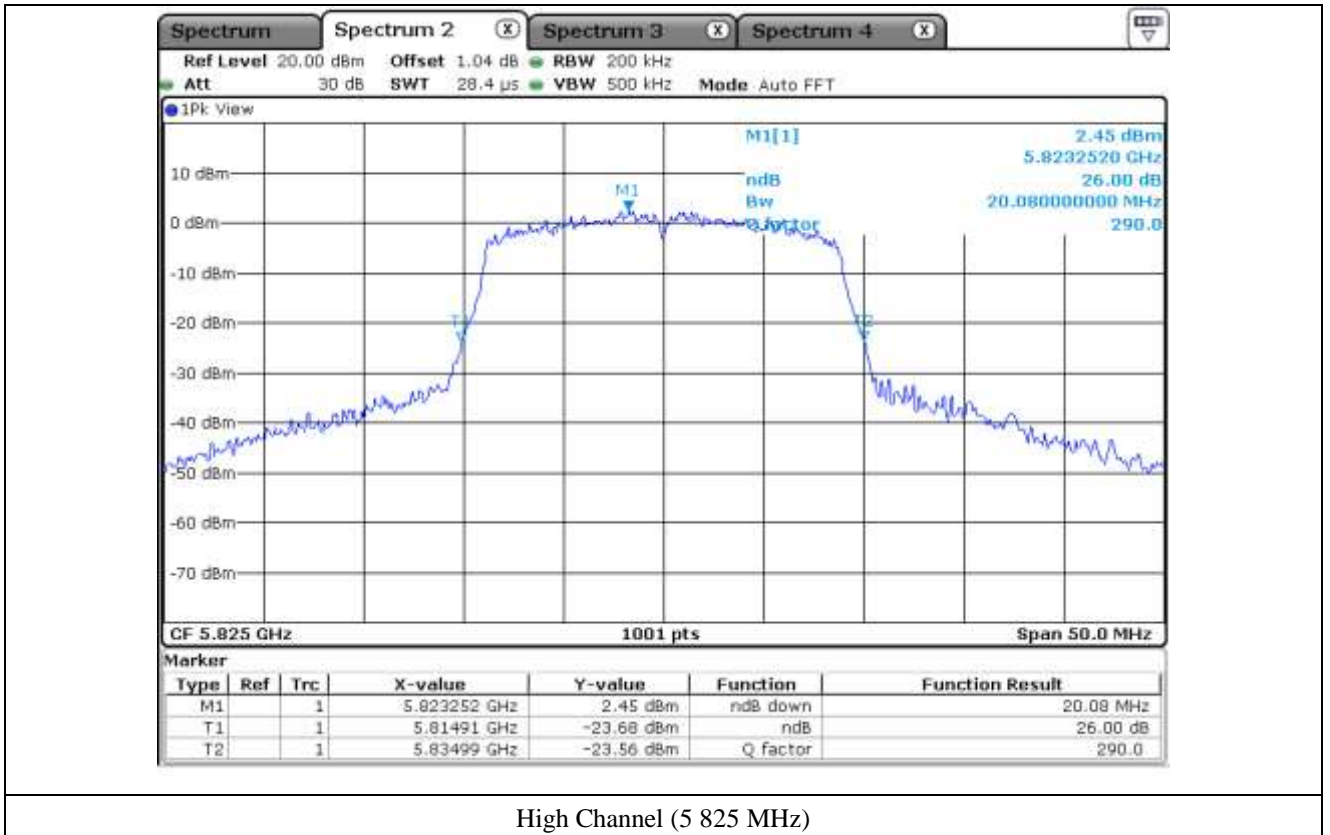


7.5.2 Test data for Antenna 1


-. Test Result : Pass

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	26 dB Bandwidth (MHz)
5 150 ~ 5 250	Low	5 180.00	20.13
	Middle	5 220.00	20.03
	High	5 240.00	20.18
5 250 ~ 5 350	Low	5 260.00	20.13
	Middle	5 300.00	20.18
	High	5 320.00	20.03
5 470 ~ 5 725	Low	5 500.00	20.43
	Middle	5 580.00	20.28
	High	5 700.00	20.08
5 725 ~ 5 850	Low	5 745.00	20.08
	Middle	5 785.00	20.23
	High	5 825.00	19.88


Remark: See next page for measurement data.

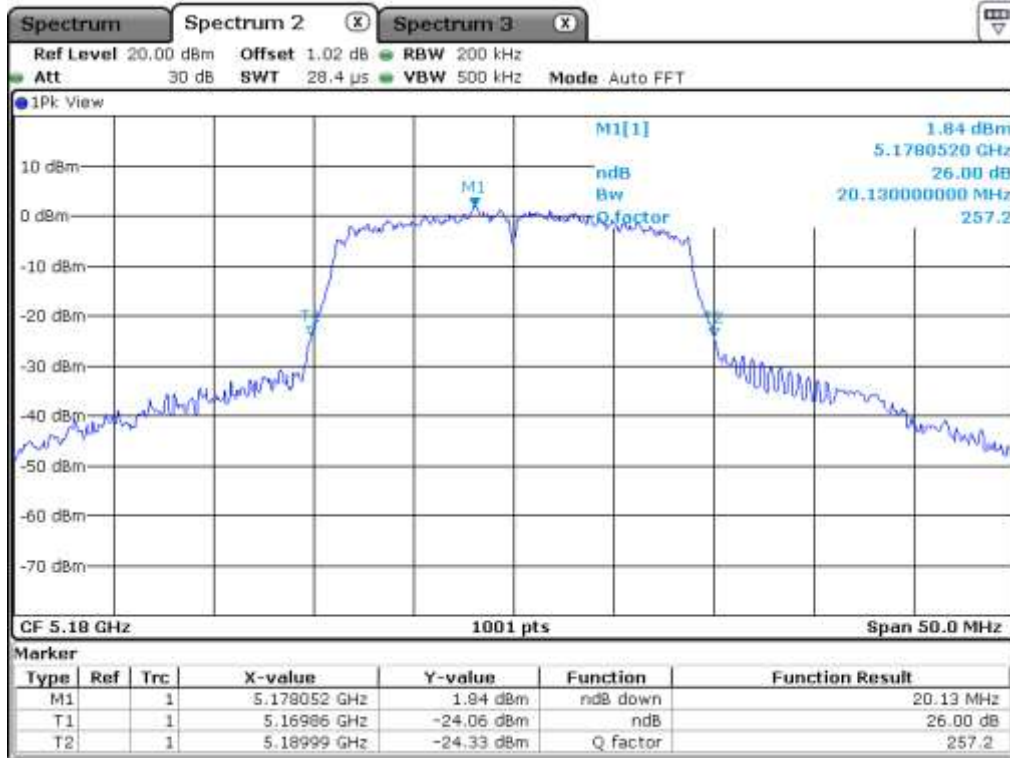


Low Channel (5 180 MHz)

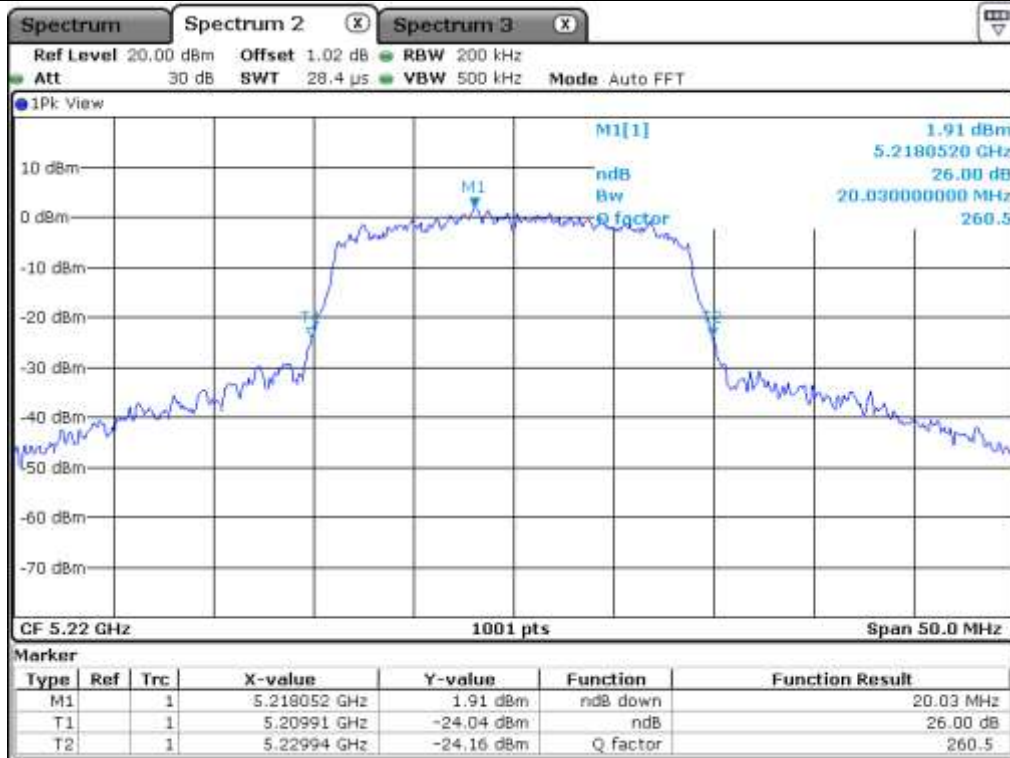


Middle Channel (5 220 MHz)

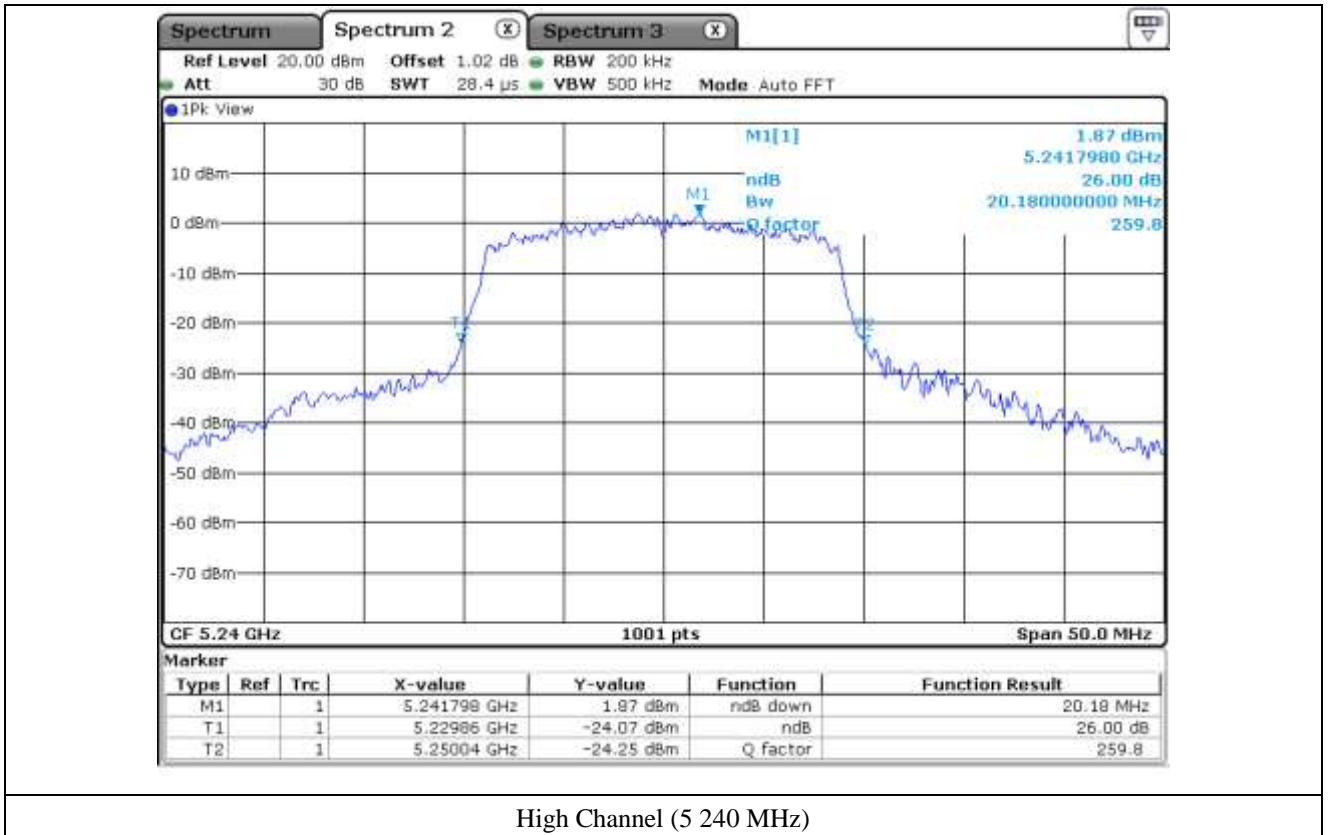


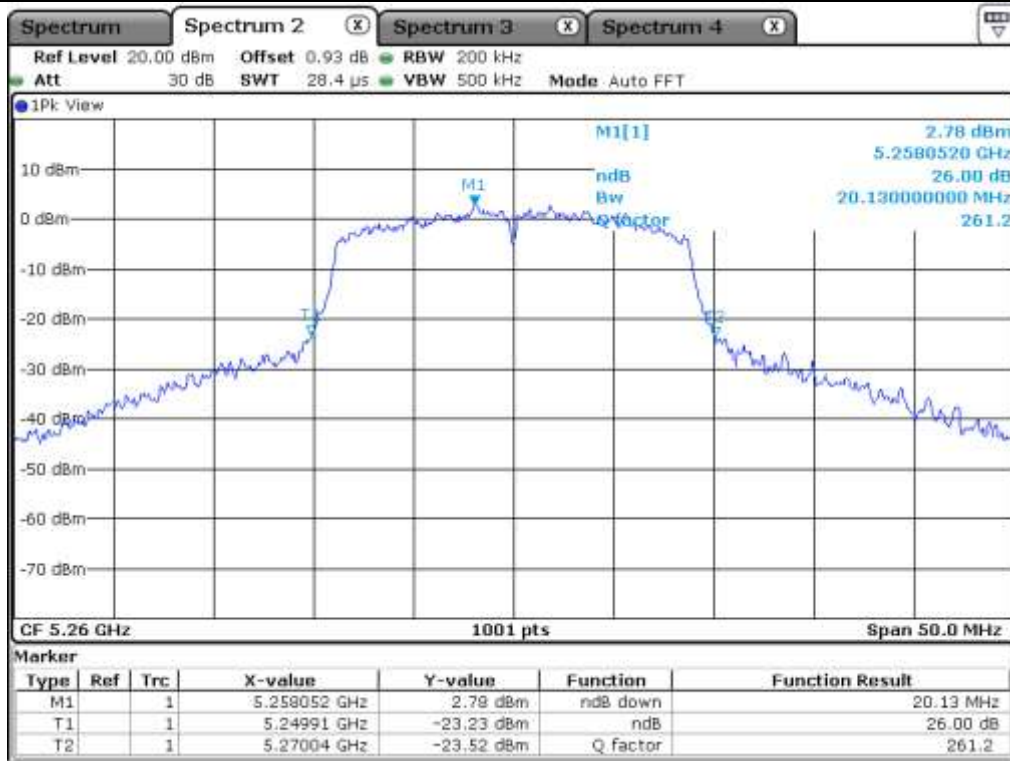


Low Channel (5 260 MHz)

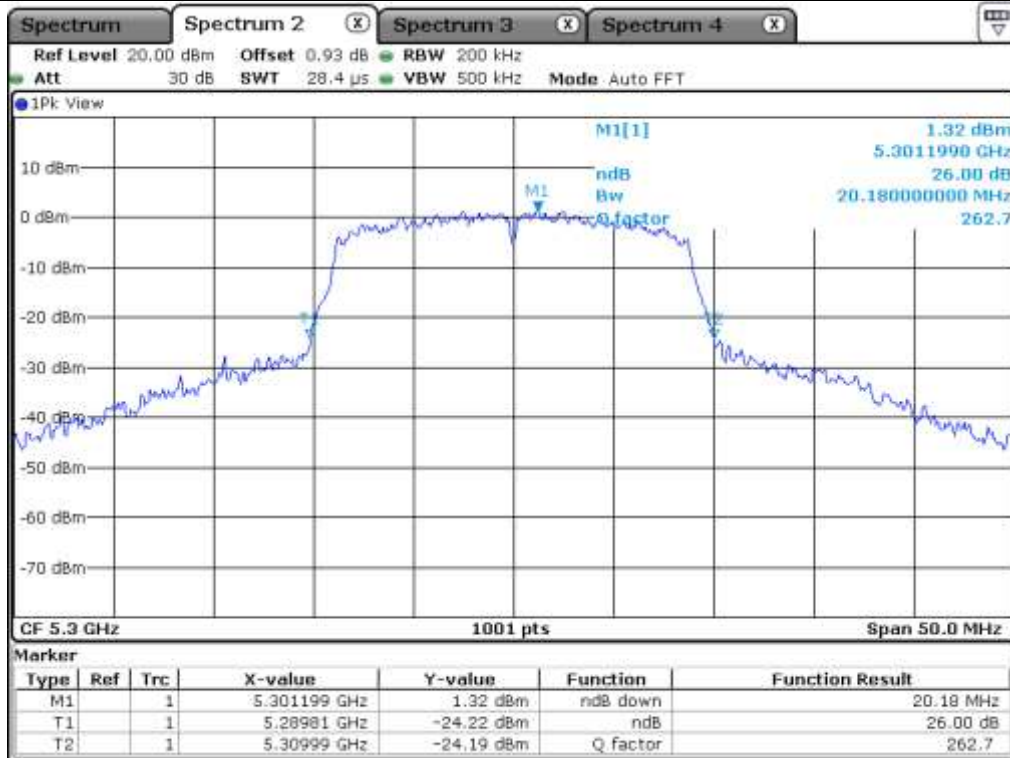


Middle Channel (5 300 MHz)

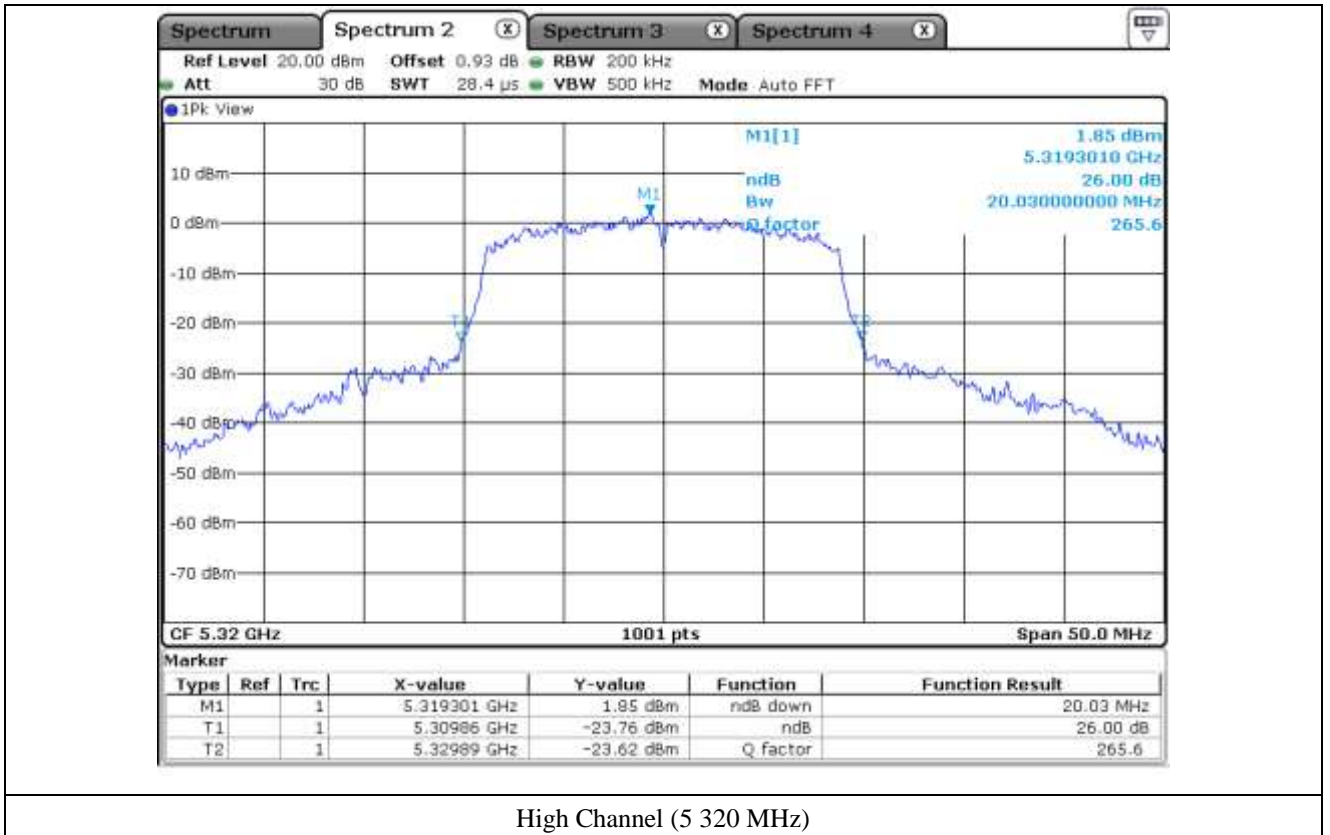


High Channel (5 320 MHz)

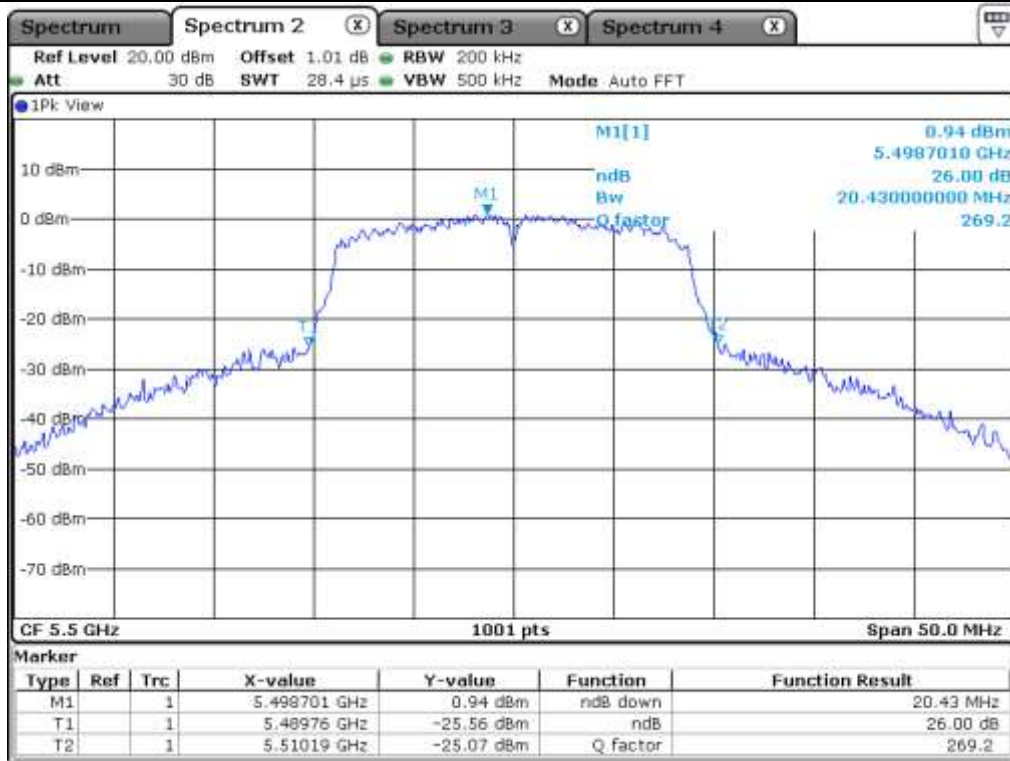


Low Channel (5 500 MHz)

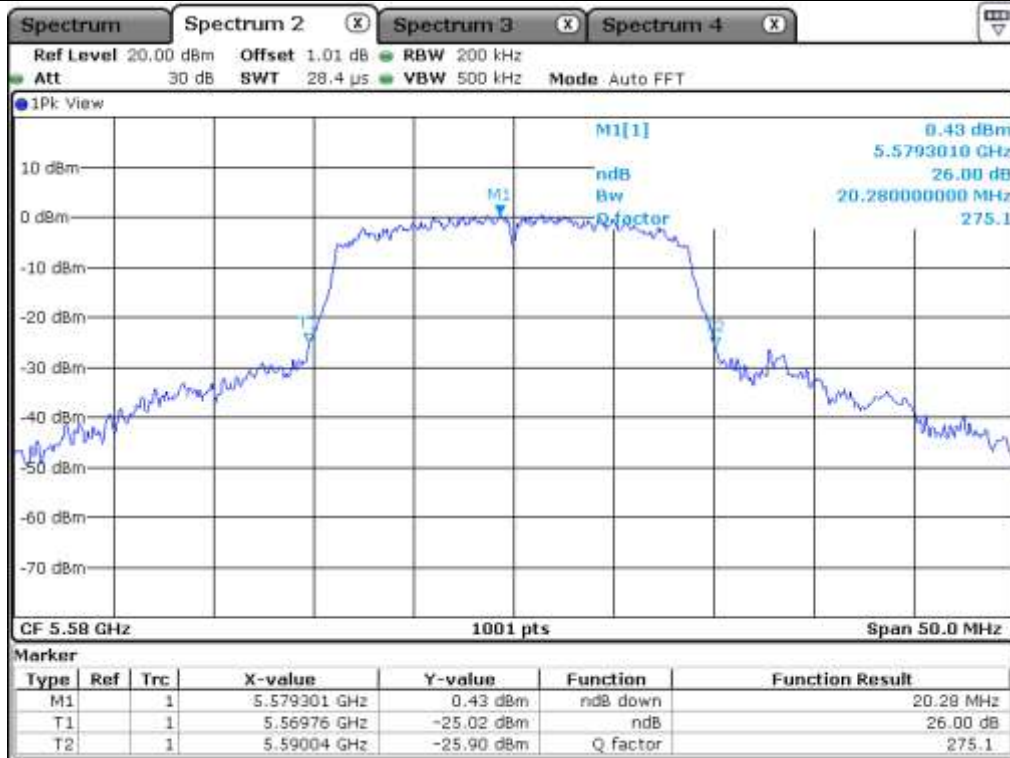


Middle Channel (5 580 MHz)

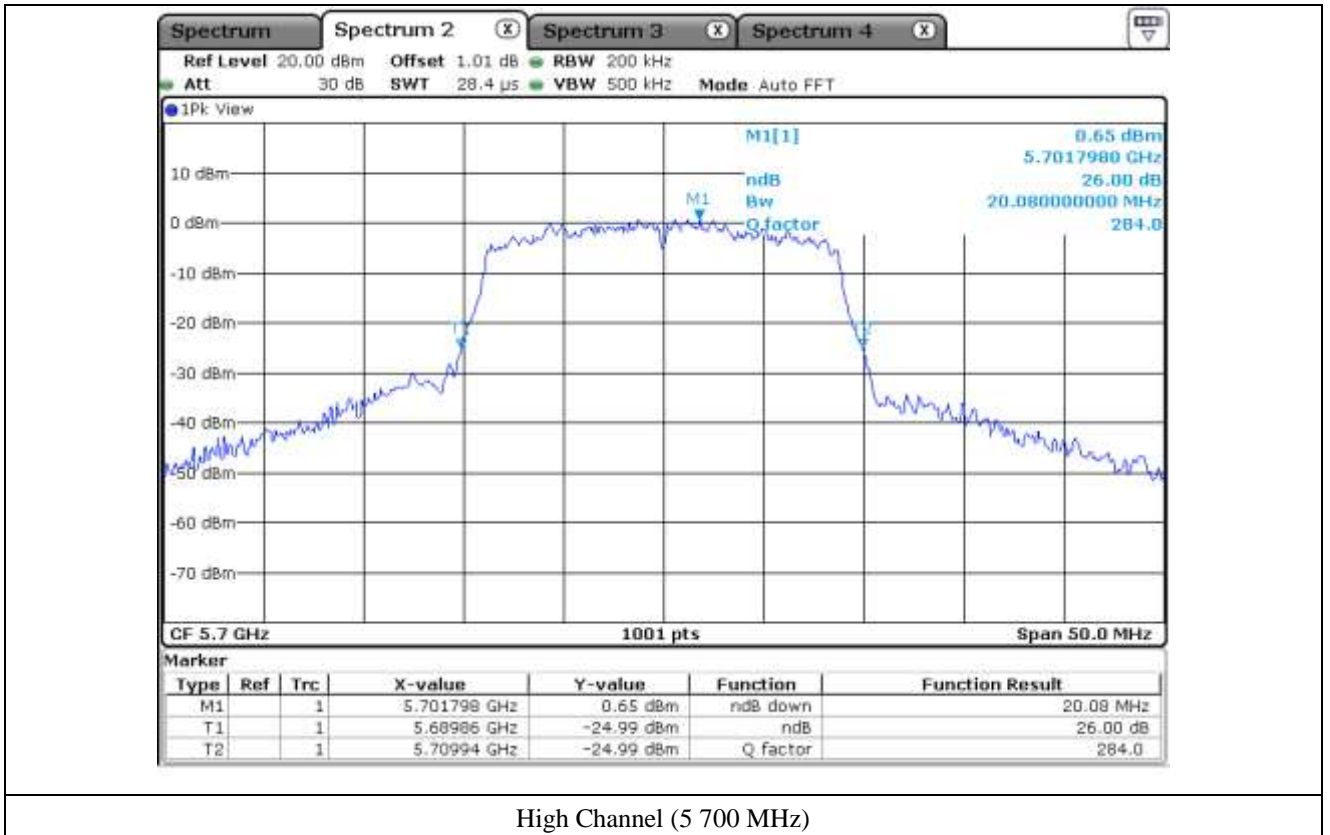


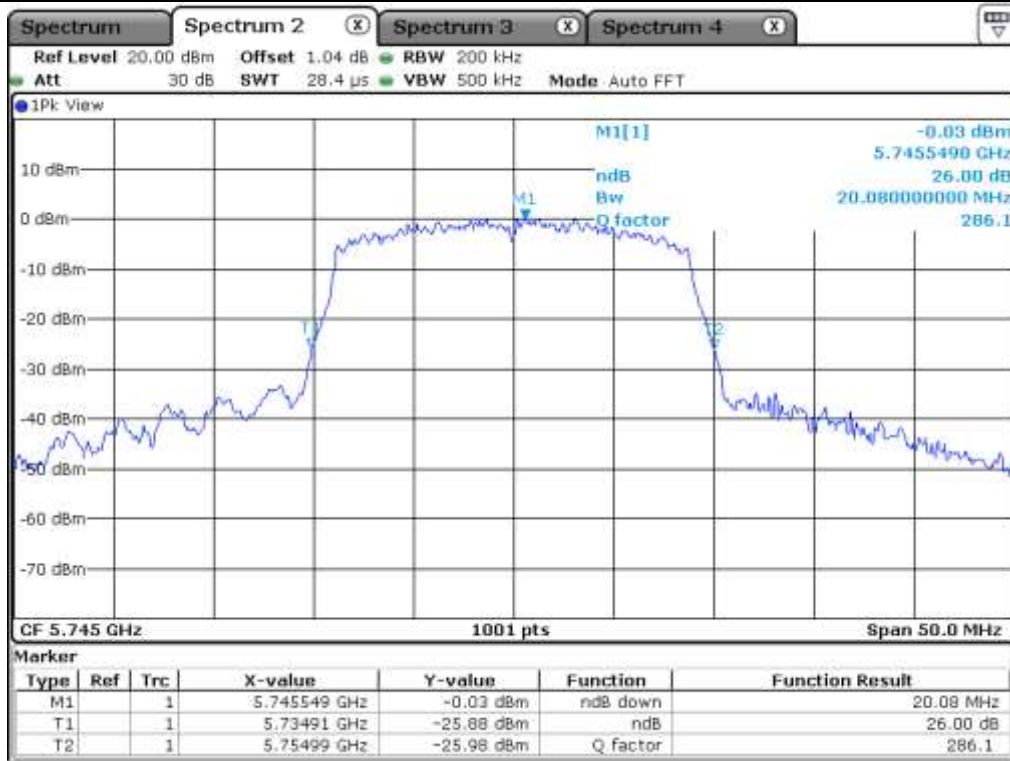

Low Channel (5 745 MHz)

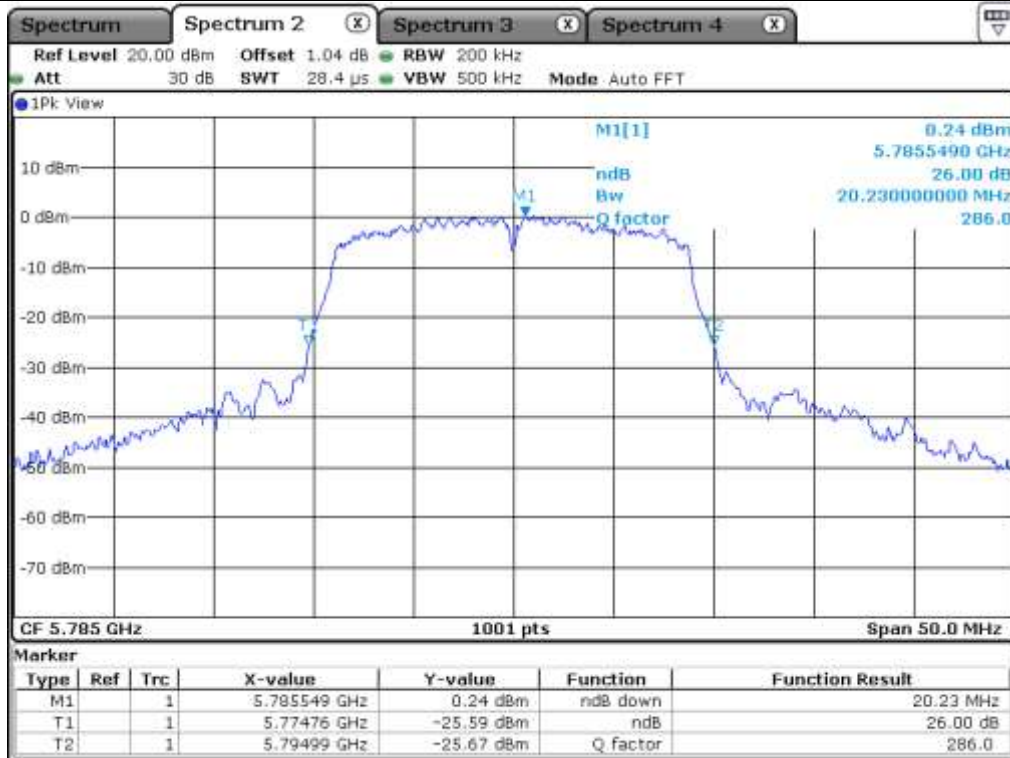

Middle Channel (5 785 MHz)

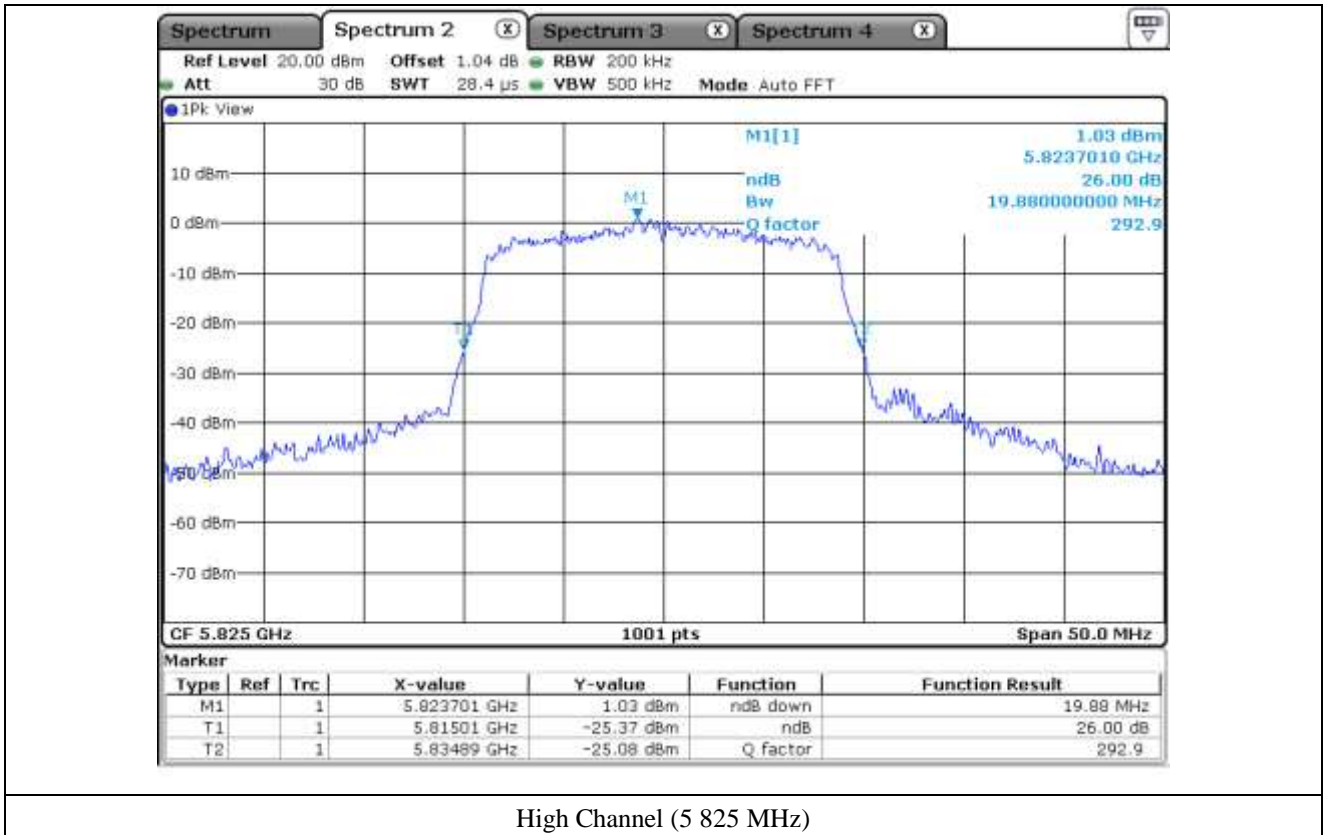


High Channel (5 825 MHz)

7.4.3 Test data for Staddle Channel_Antenna 0

-. Test Result : Pass


FREQUENCY RANGE (MHz)	FREQUENCY (MHz)	26 dB Bandwidth (MHz)
5 470 ~ 5 725	5 720.00	15.19
5 725 ~ 5 850	5 720.00	5.04

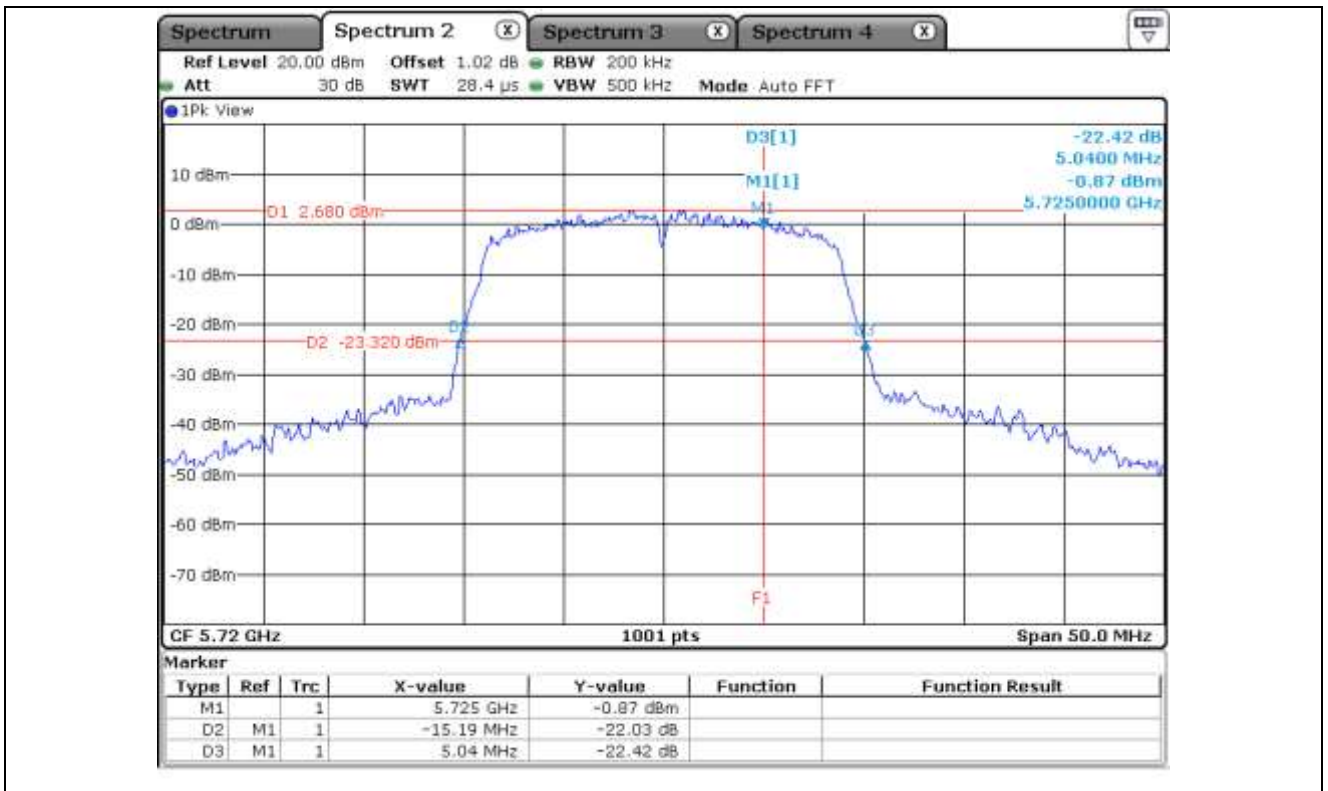

7.4.4 Test data for Staddle Channel_Antenna 1

-. Test Result : Pass

FREQUENCY RANGE (MHz)	FREQUENCY (MHz)	26 dB Bandwidth (MHz)
5 470 ~ 5 725	5 720.00	15.04
5 725 ~ 5 850	5 720.00	5.04

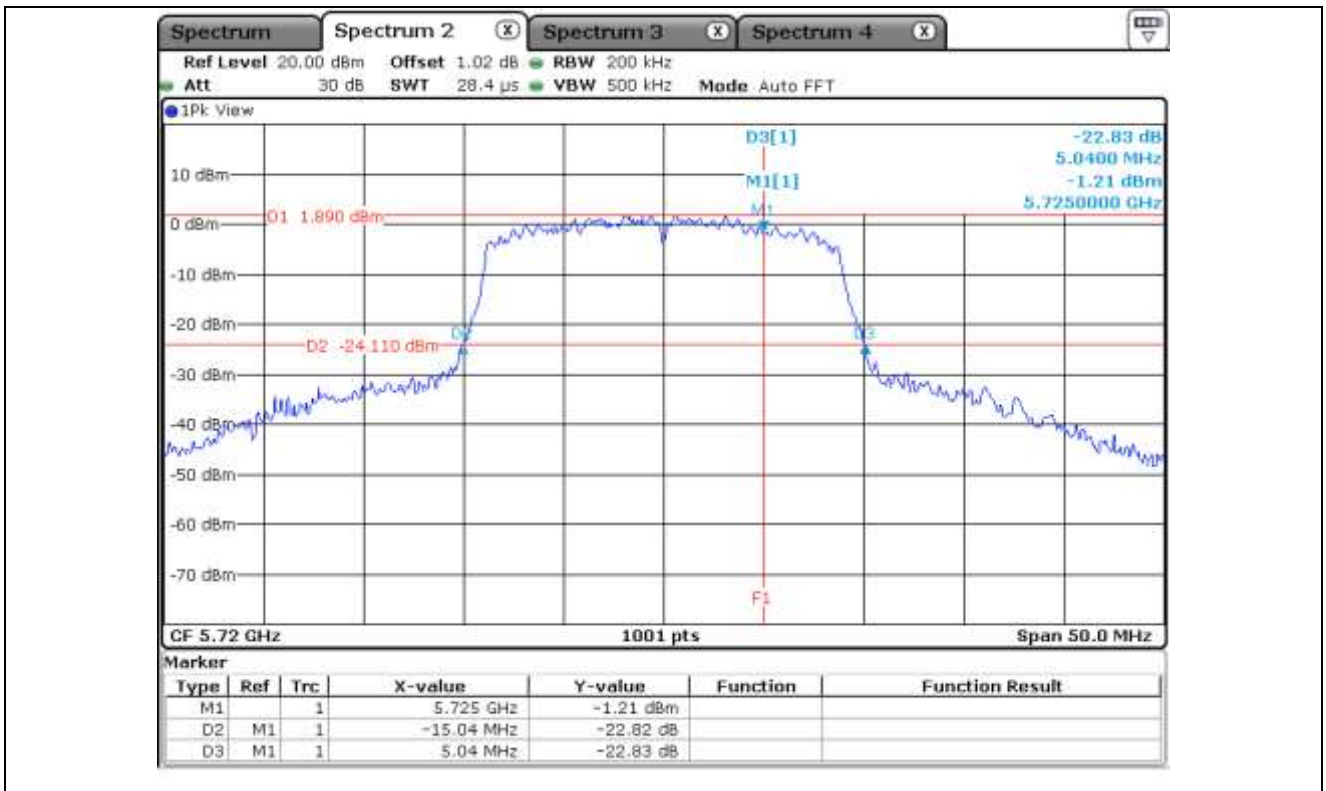


7.6 Test data for 802.11n_HT40 RLAN Mode

7.6.1 Test data for Antenna 0


-. Test Result : Pass

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	26 dB Bandwidth (MHz)
5 150 ~ 5 250	Low	5 190.00	40.56
	High	5 230.00	40.56
5 250 ~ 5 350	Low	5 270.00	40.46
	High	5 310.00	40.86
5 470 ~ 5 725	Low	5 510.00	40.66
	Middle	5 550.00	39.96
	High	5 670.00	40.36
5 725 ~ 5 850	Low	5 755.00	40.56
	High	5 795.00	40.36


Remark: See next page for measurement data.

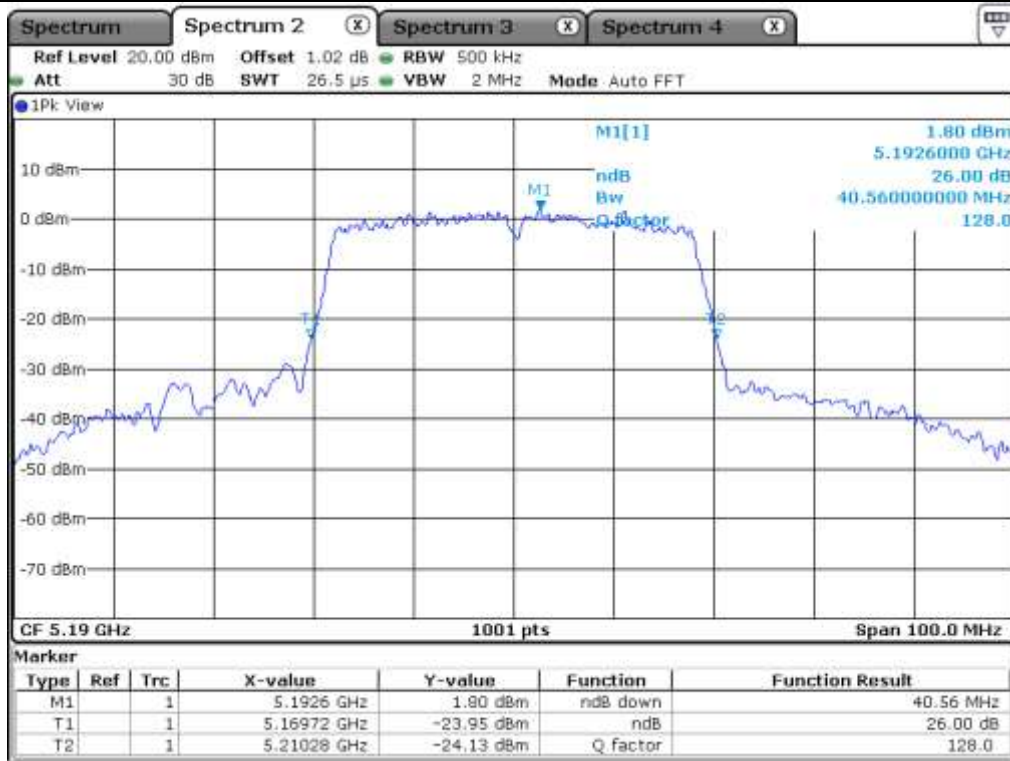


Low Channel (5 190 MHz)

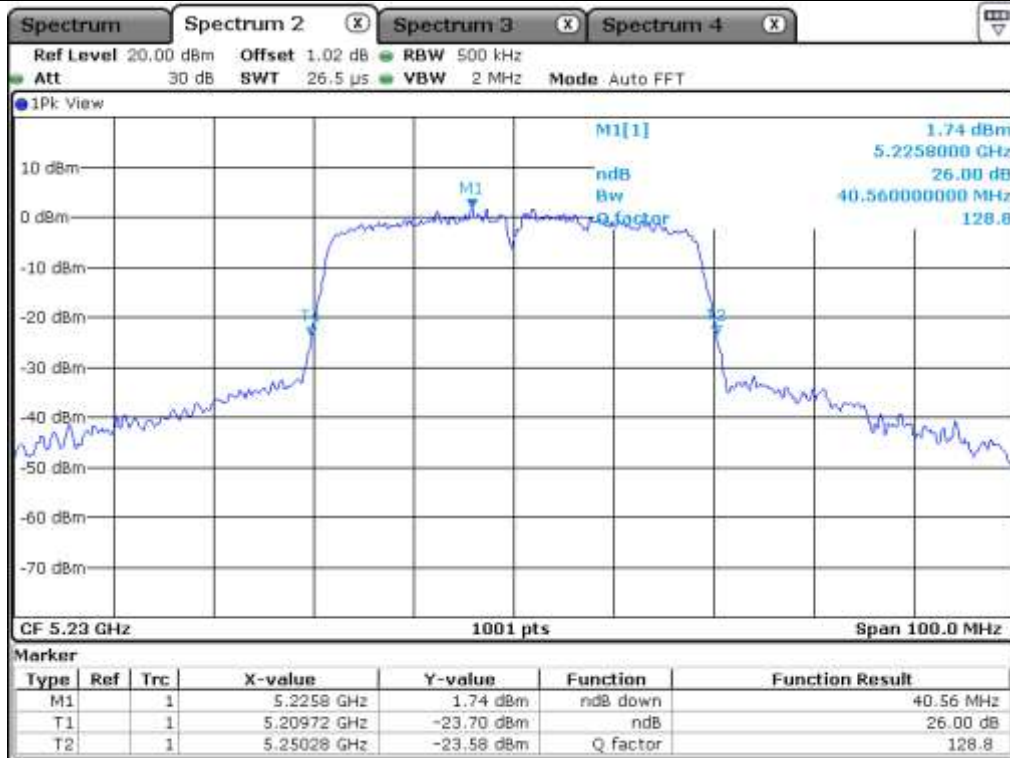


High Channel (5 230 MHz)

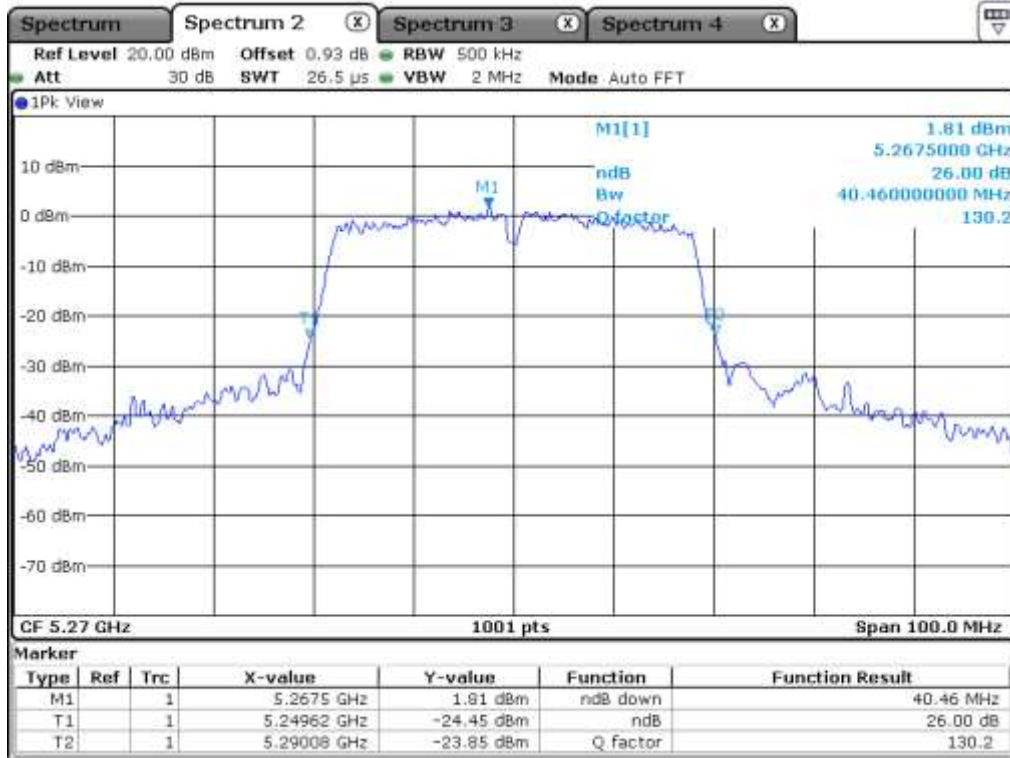


Low Channel (5 270 MHz)

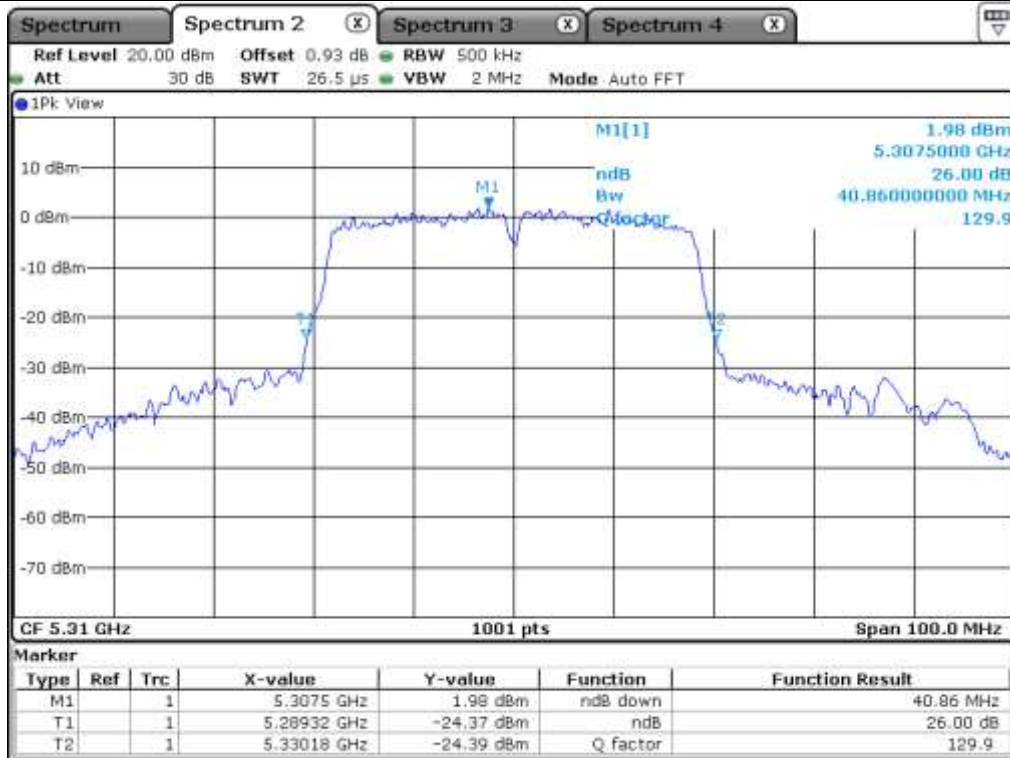


High Channel (5 310 MHz)

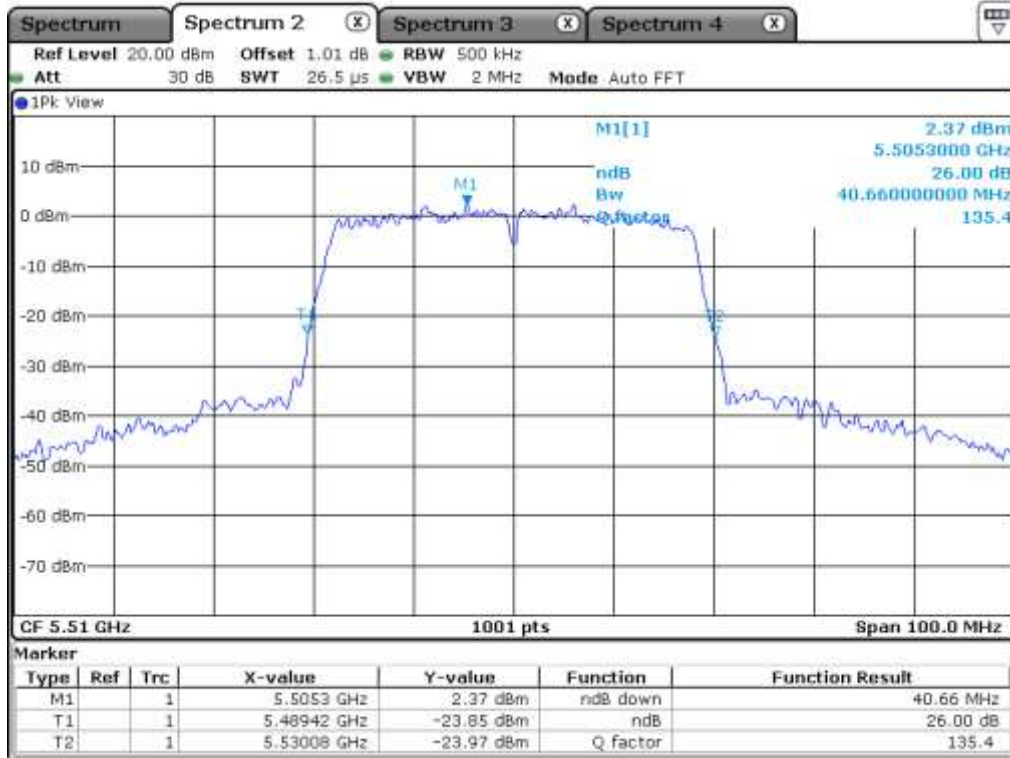


Low Channel (5 510 MHz)

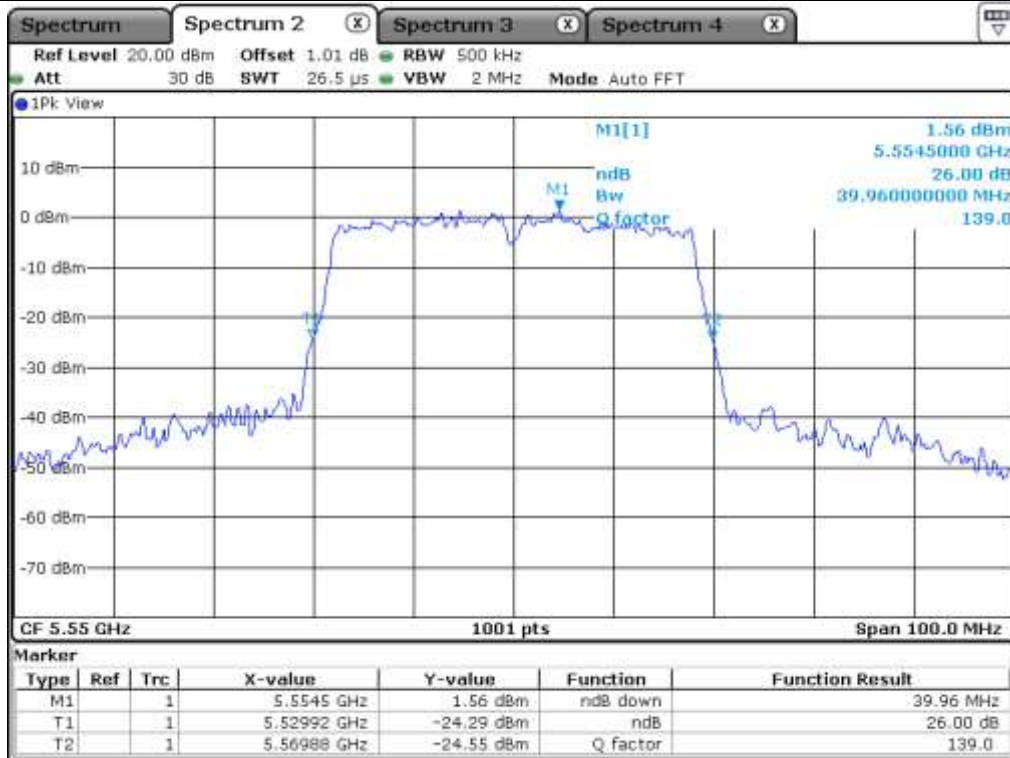


Middle Channel (5 550 MHz)

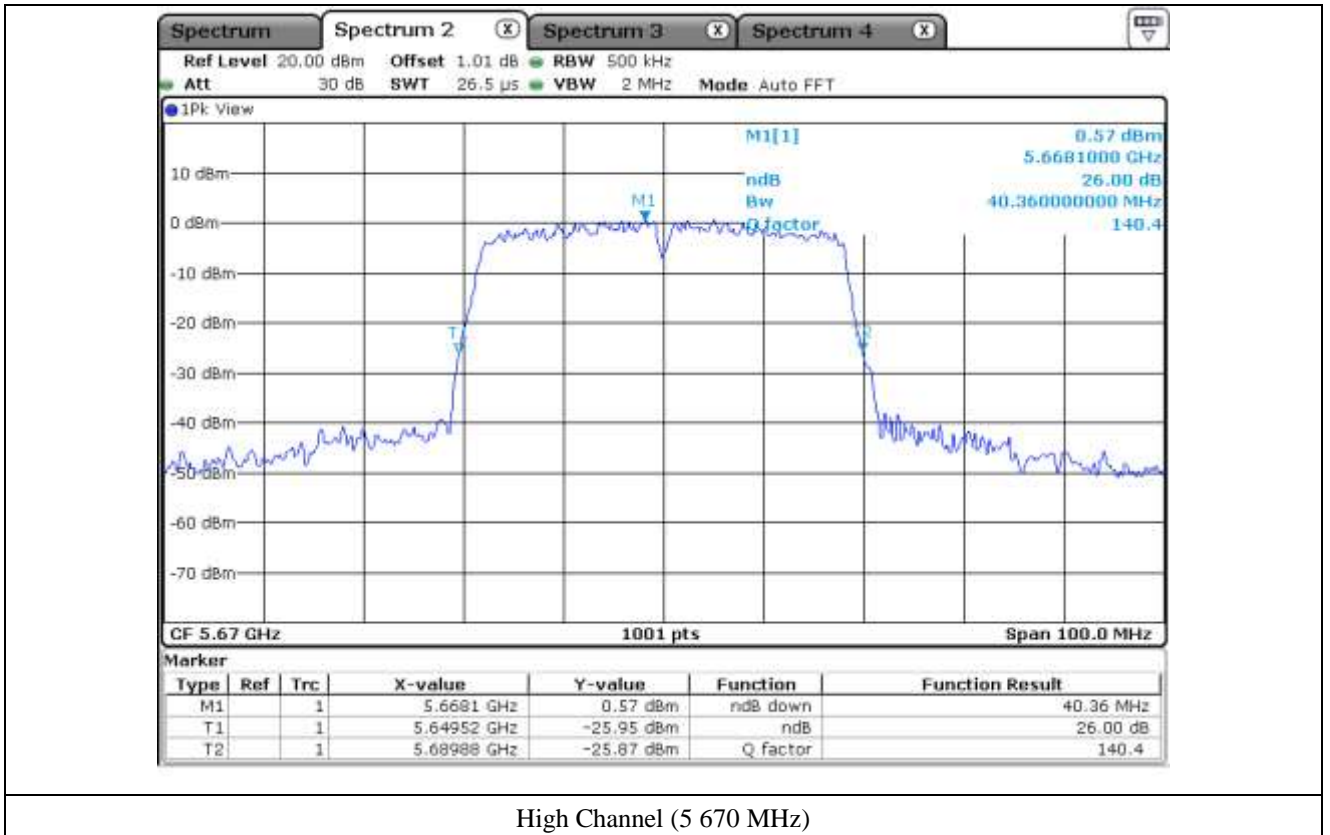

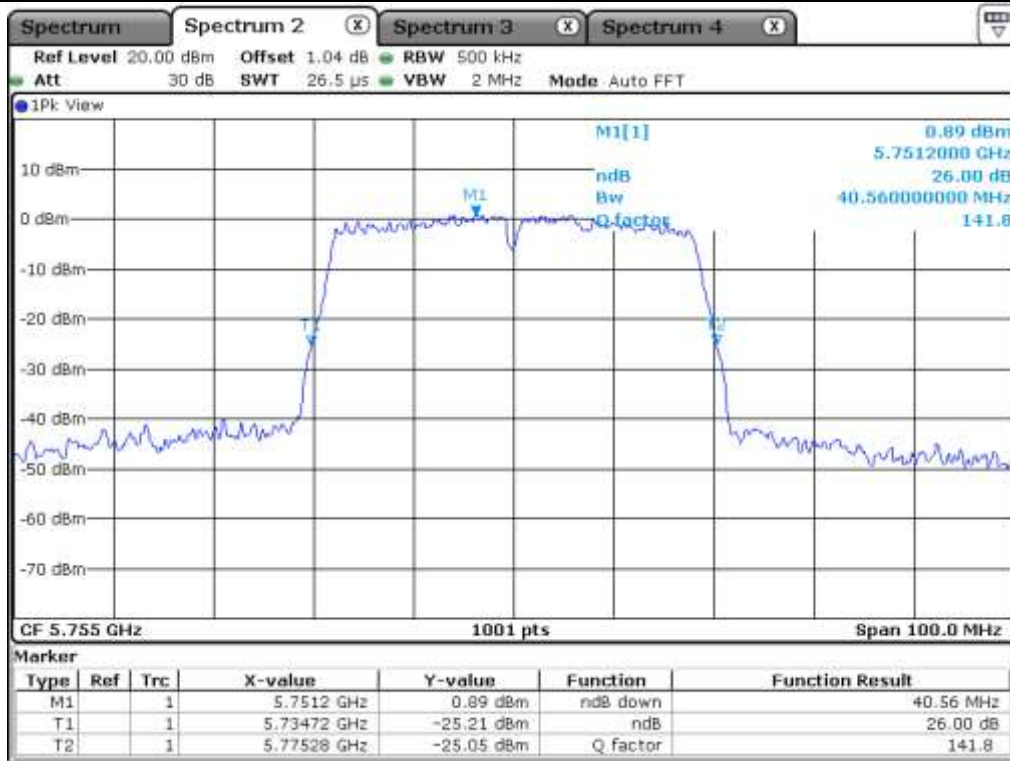

Low Channel (5 755 MHz)

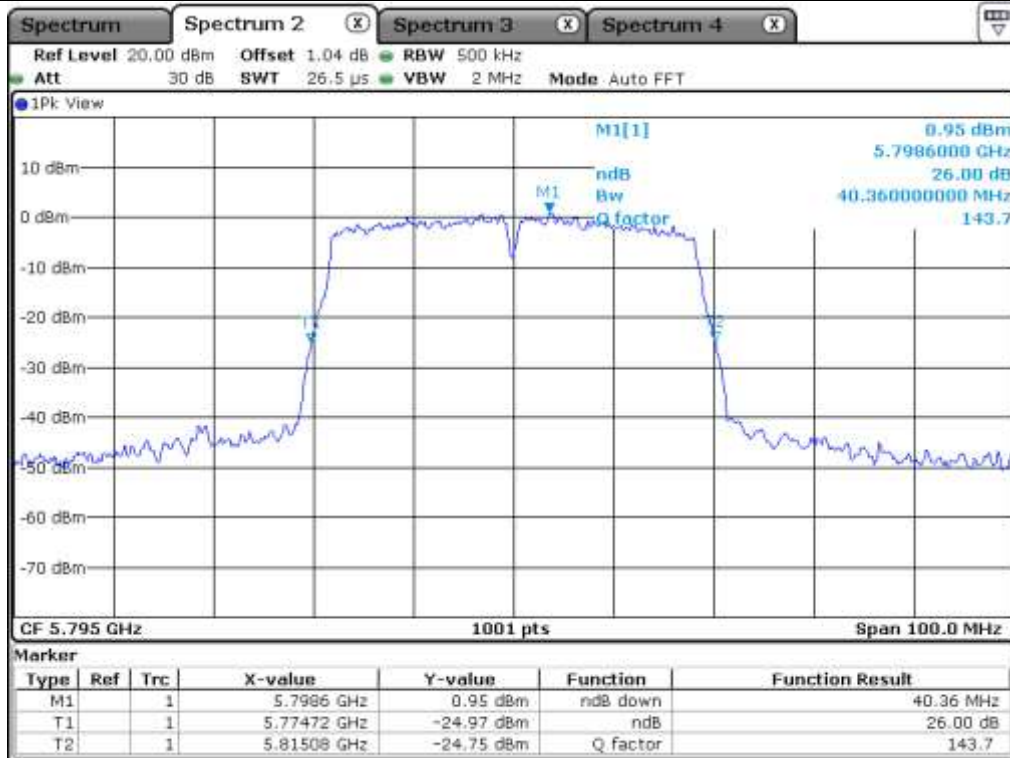


High Channel (5 795 MHz)

7.6.2 Test data for Antenna 1


-. Test Result : Pass

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	26 dB Bandwidth (MHz)
5 150 ~ 5 250	Low	5 190.00	40.16
	High	5 230.00	40.06
5 250 ~ 5 350	Low	5 270.00	40.16
	High	5 310.00	40.46
5 470 ~ 5 725	Low	5 510.00	40.16
	Middle	5 550.00	40.06
	High	5 670.00	40.26
5 725 ~ 5 850	Low	5 755.00	39.96
	High	5 795.00	39.56


Remark: See next page for measurement data.

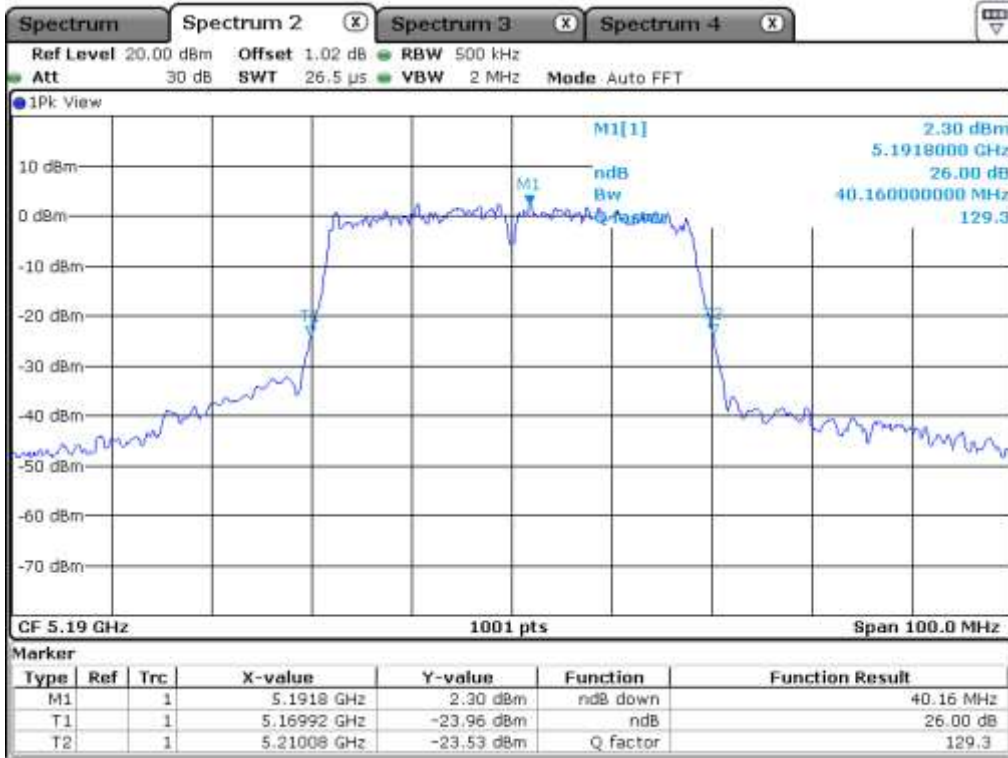


Low Channel (5 190 MHz)

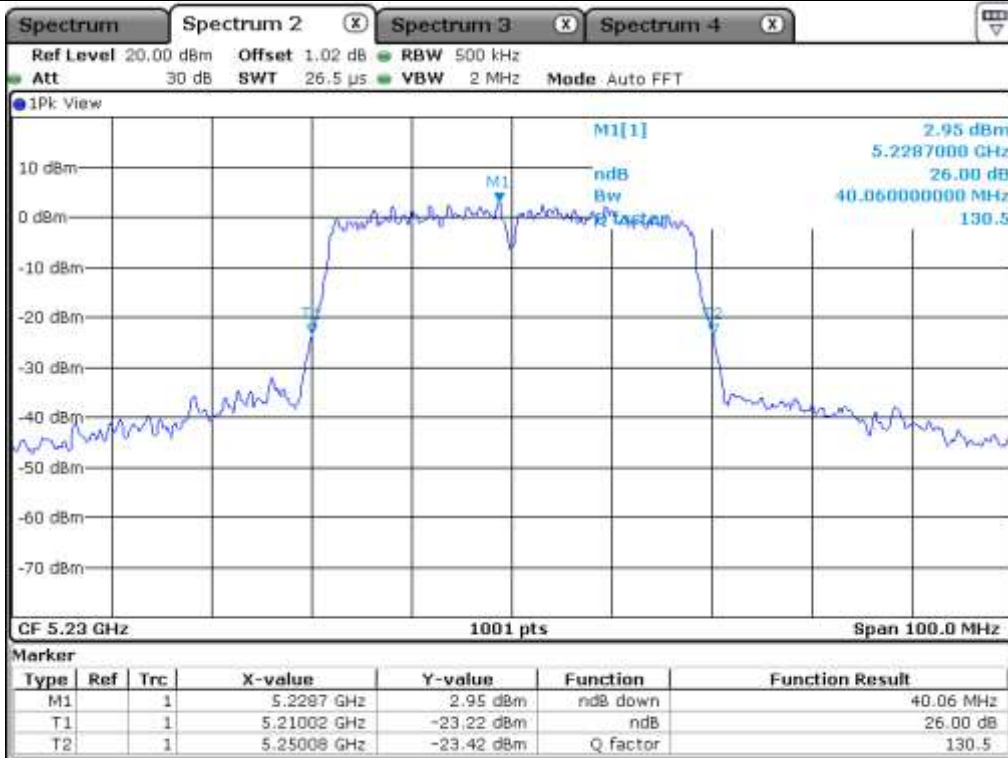


High Channel (5 230 MHz)

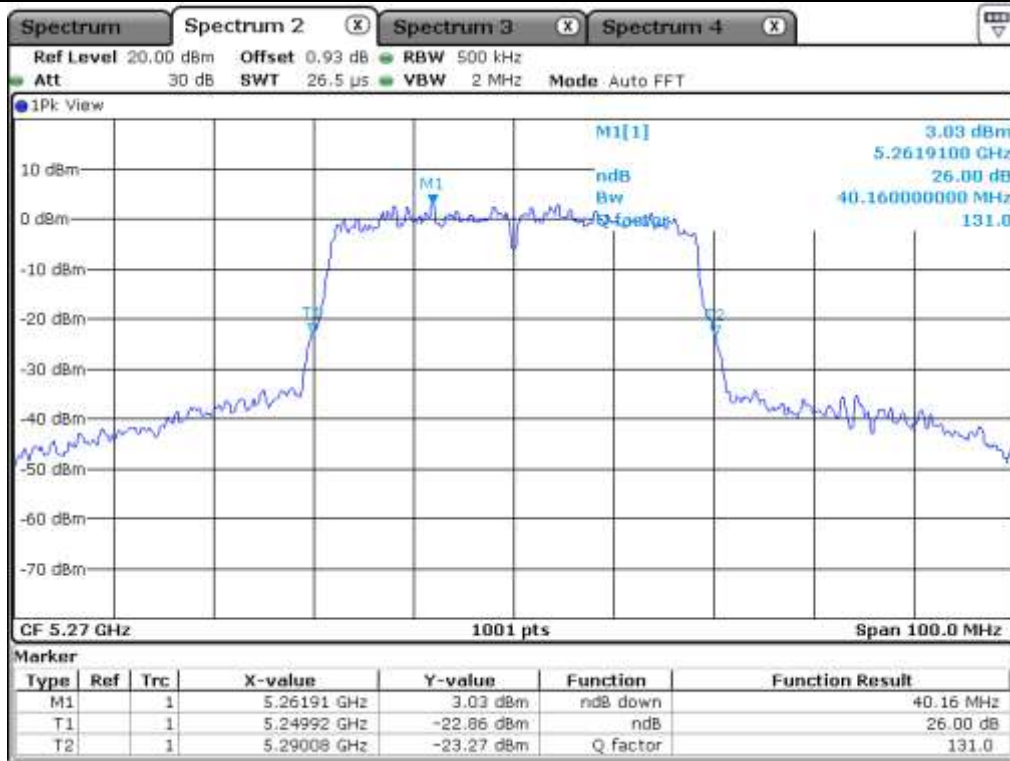


Low Channel (5 270 MHz)

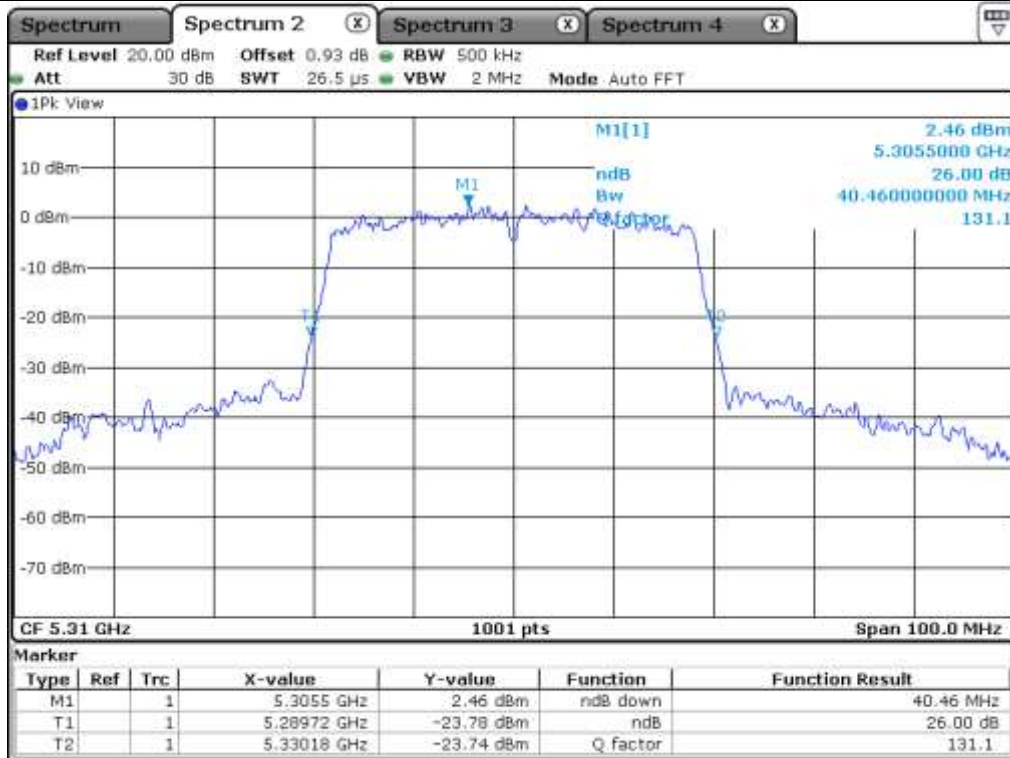


High Channel (5 310 MHz)

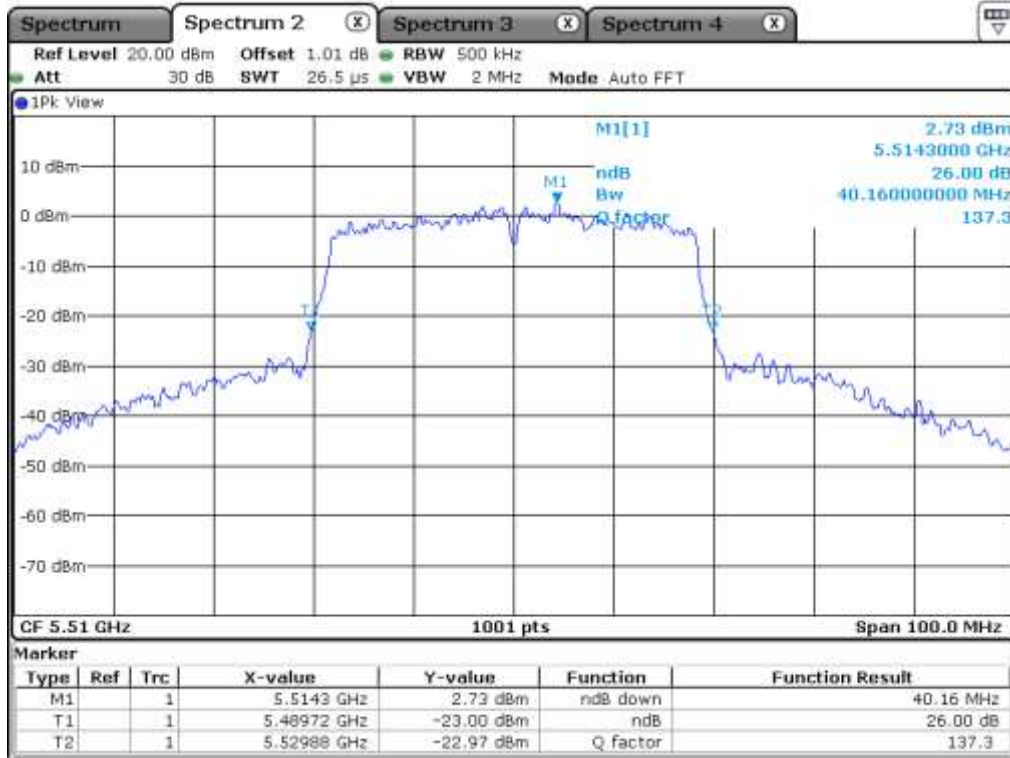


Low Channel (5.510 MHz)

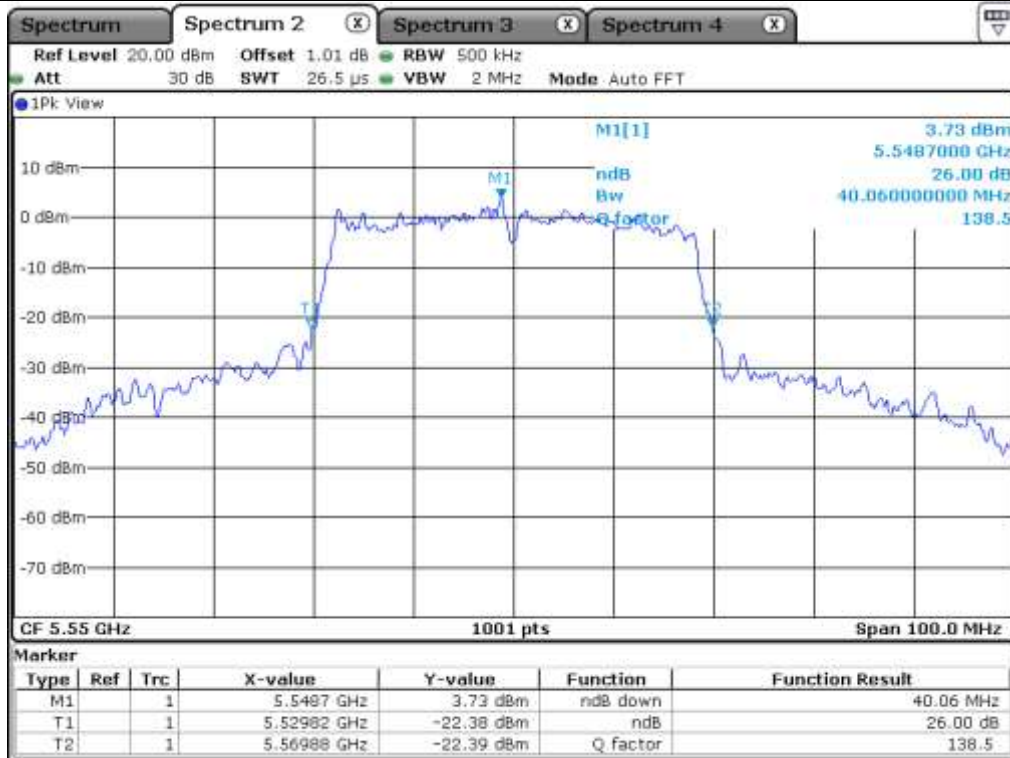


Middle Channel (5.550 MHz)

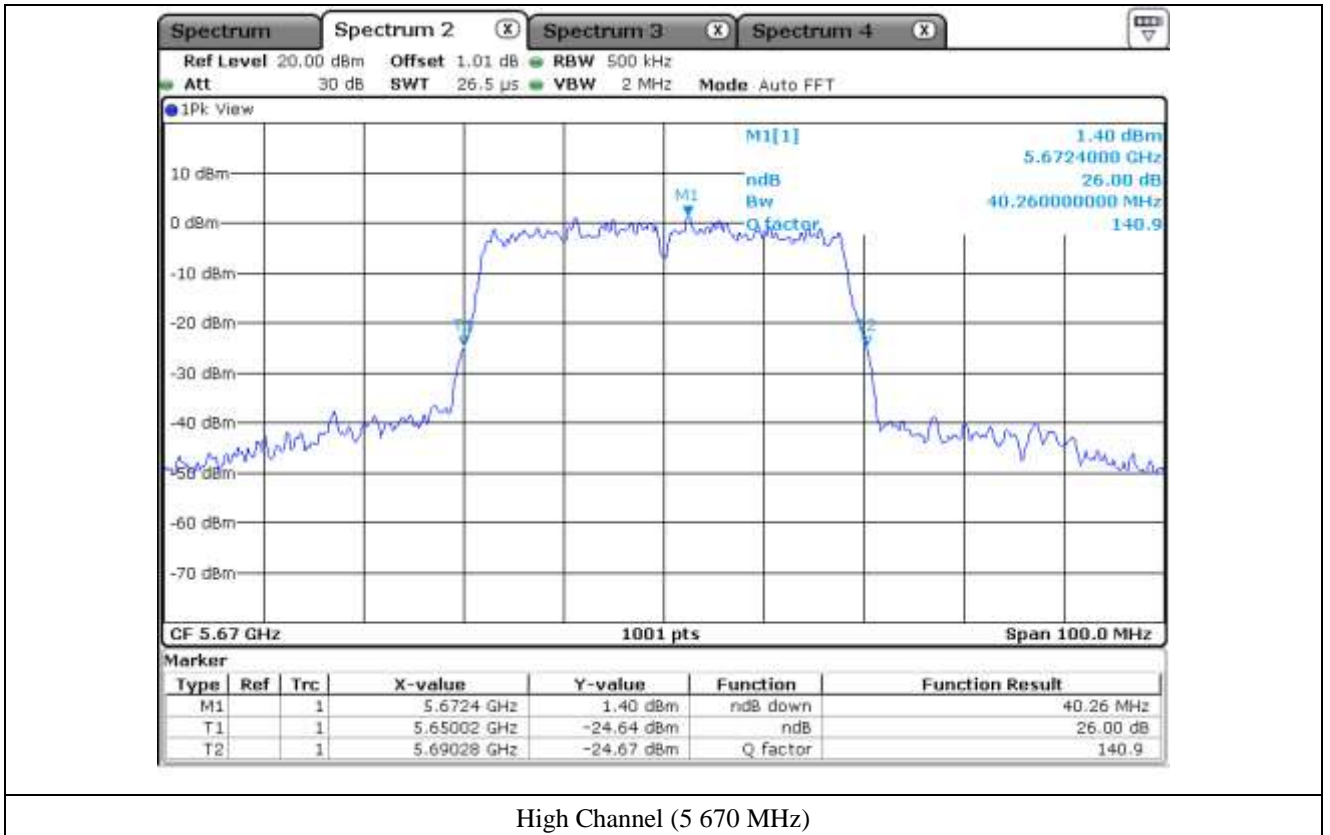

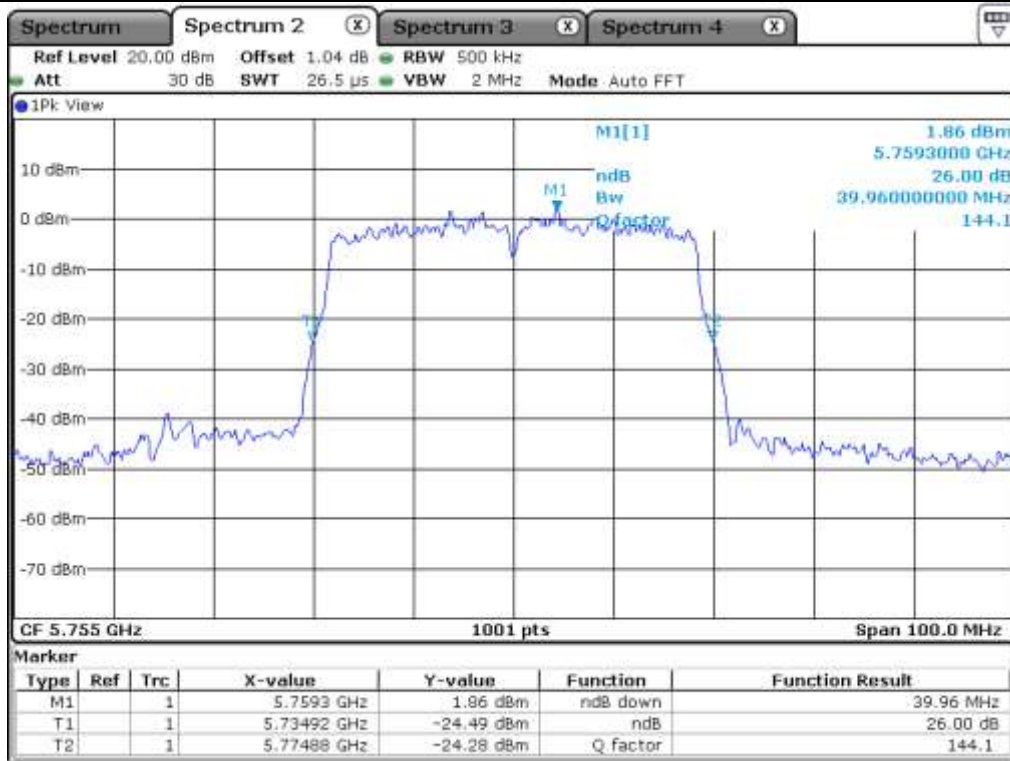

Low Channel (5 755 MHz)

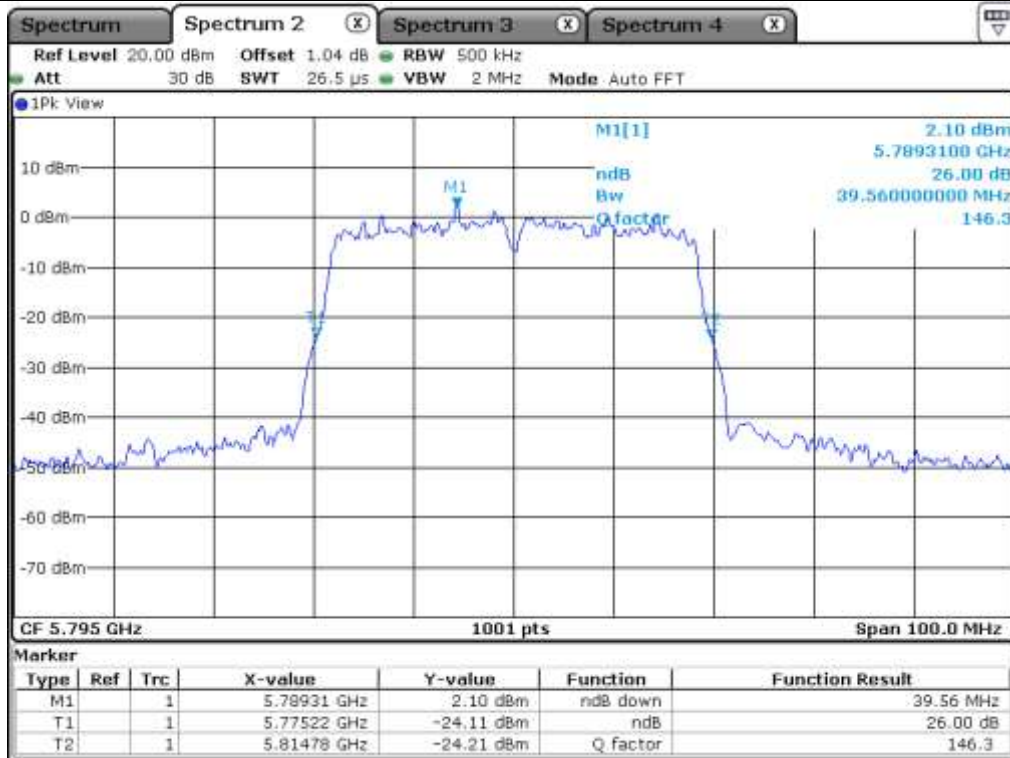


High Channel (5 795 MHz)

7.6.3 Test data for Staddle Channel_Antenna 0

-. Test Result : Pass


FREQUENCY RANGE (MHz)	FREQUENCY (MHz)	26 dB Bandwidth (MHz)
5 470 ~ 5 725	5 710.00	35.38
5 725 ~ 5 850	5 710.00	5.38

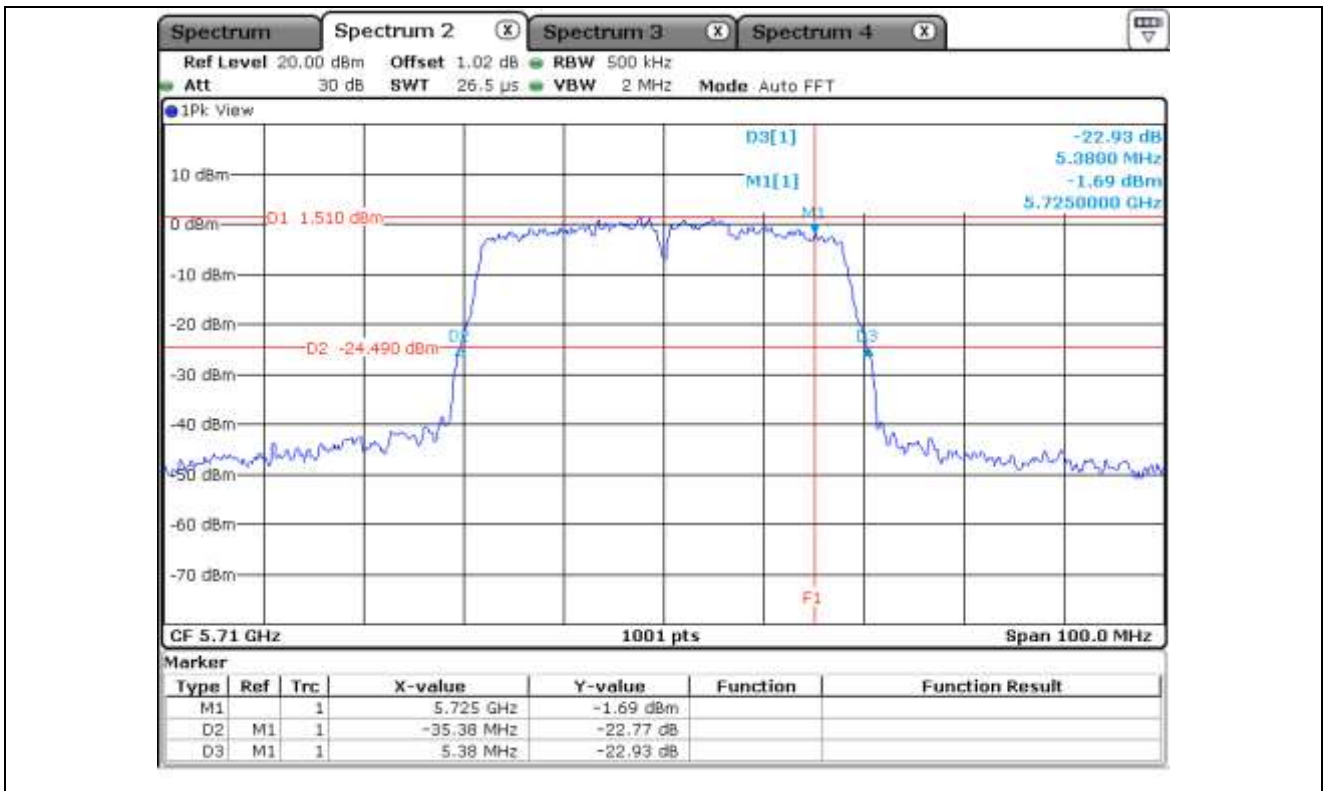

7.6.4 Test data for Staddle Channel_Antenna 1

-. Test Result : Pass

FREQUENCY RANGE (MHz)	FREQUENCY (MHz)	26 dB Bandwidth (MHz)
5 470 ~ 5 725	5 710.00	35.28
5 725 ~ 5 850	5 710.00	4.78

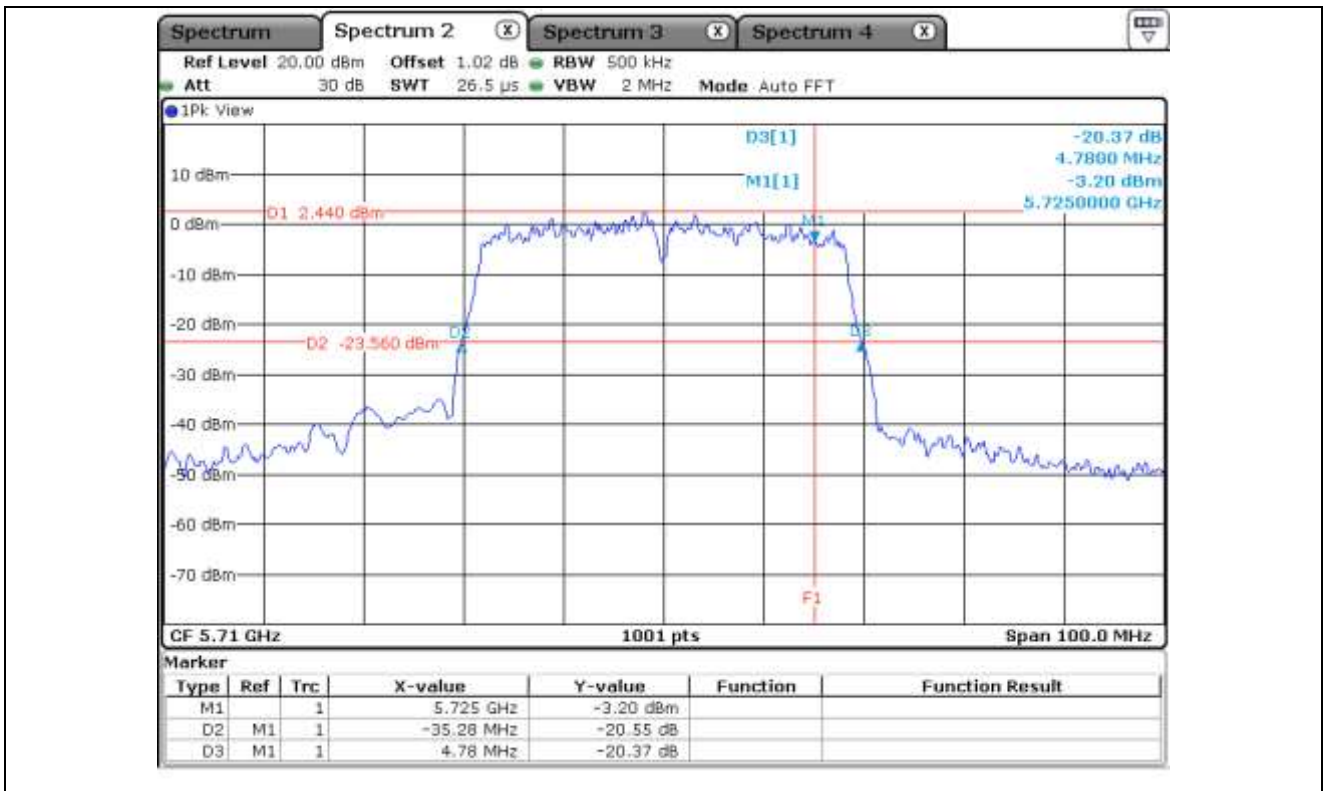


7.7 Test data for 802.11ac_VHT80 RLAN Mode

7.7.1 Test data for Antenna 0


-. Test Result : Pass

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	26 dB Bandwidth (MHz)
5 150 ~ 5 250	Middle	5 210.00	80.72
5 250 ~ 5 350	Middle	5 290.00	81.52
5 470 ~ 5 725	Middle	5 530.00	80.12
5 725 ~ 5 850	Middle	5 775.00	80.52


Remark: See next page for measurement data.

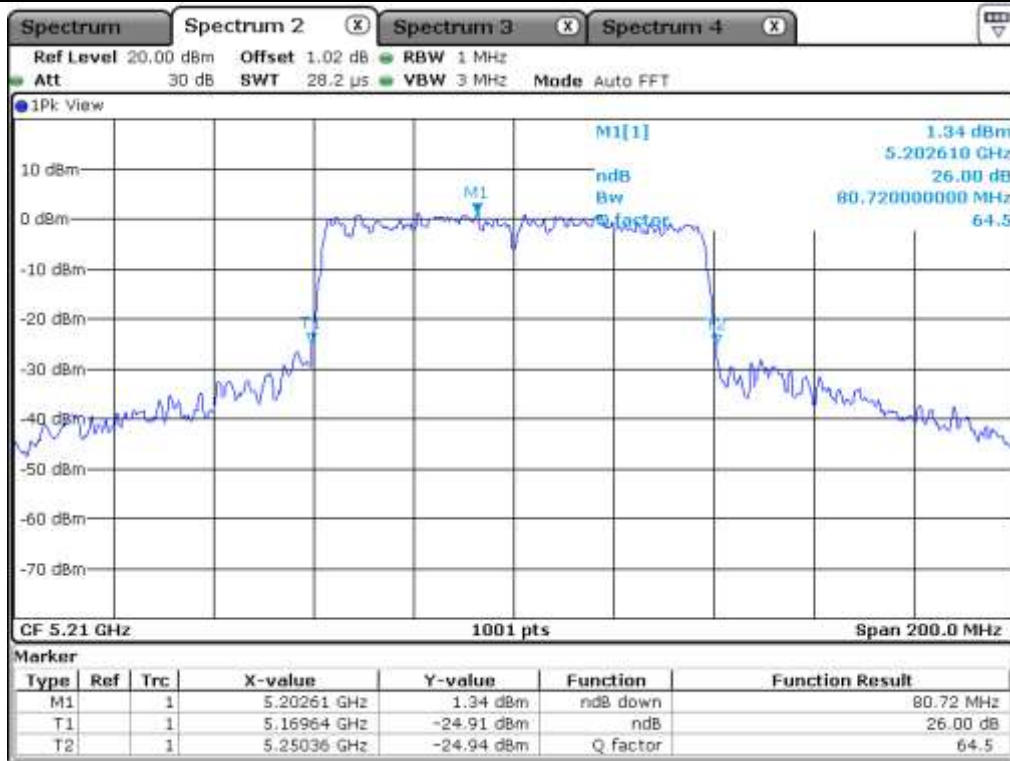


Middle Channel (5 210 MHz)

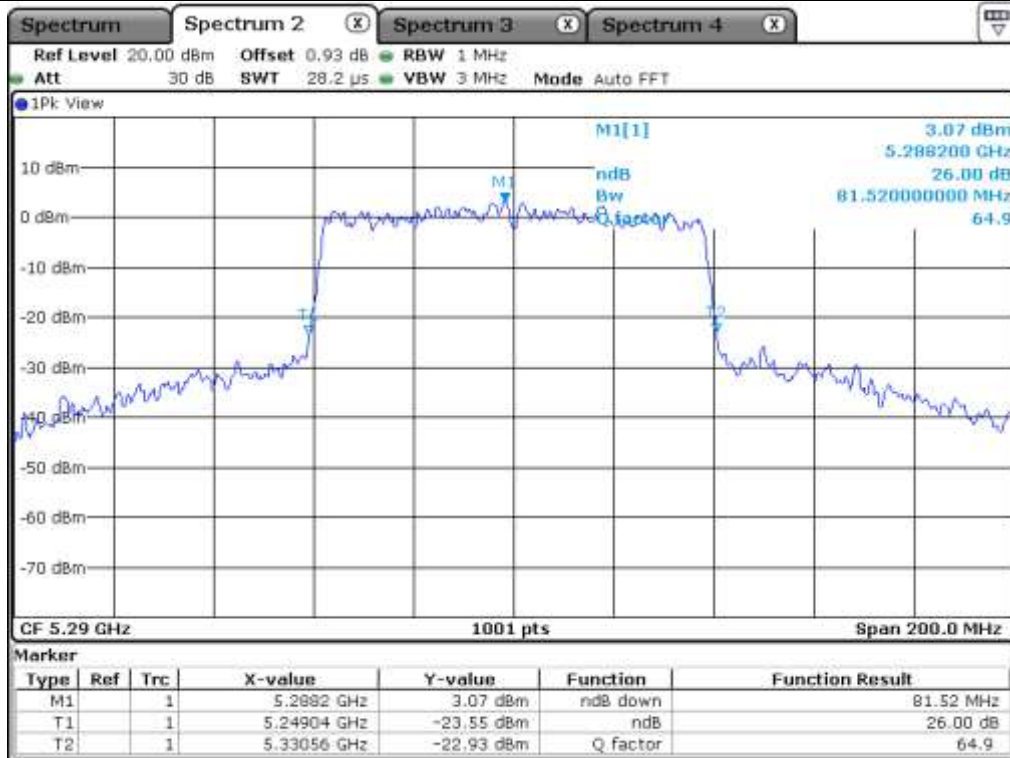

Middle Channel (5 290 MHz)

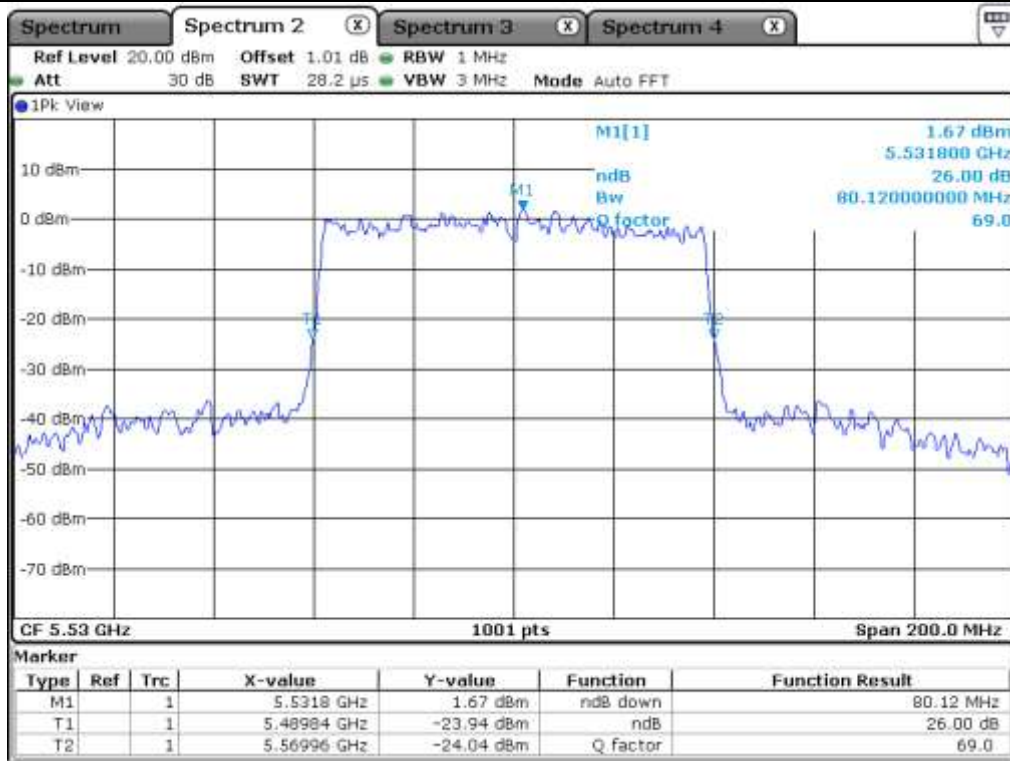

Middle Channel (5 530 MHz)

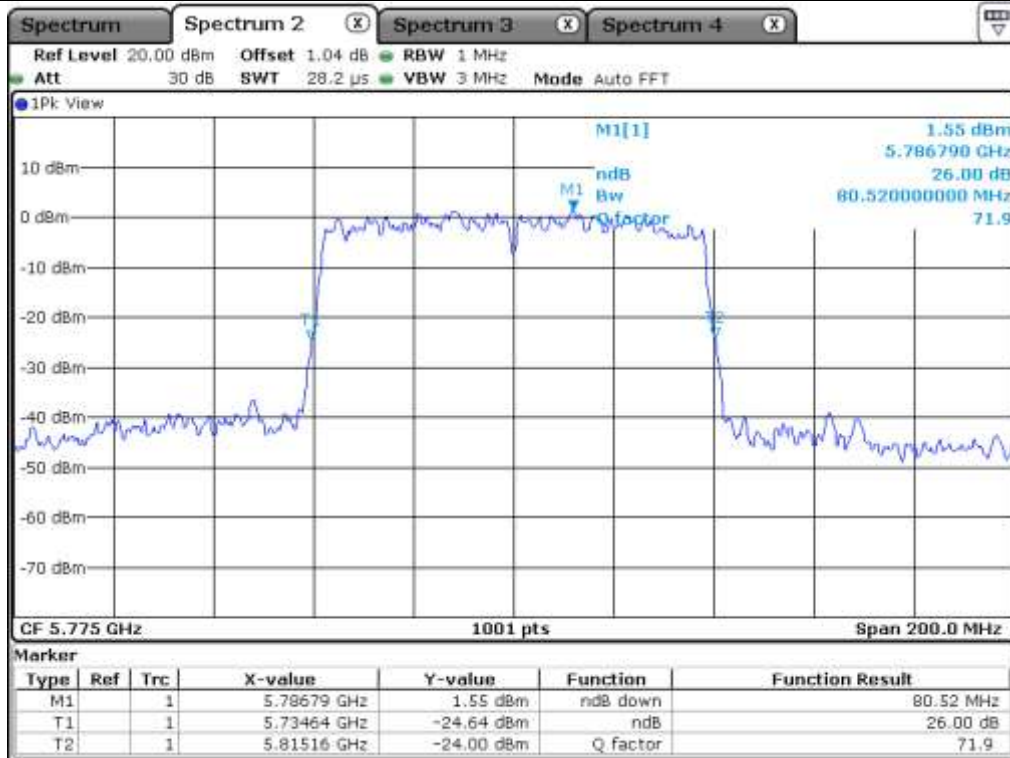


Middle Channel (5 775 MHz)

7.7.2 Test data for Antenna 1


-. Test Result : Pass

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	26 dB Bandwidth (MHz)
5 150 ~ 5 250	Middle	5 210.00	80.92
5 250 ~ 5 350	Middle	5 290.00	80.72
5 470 ~ 5 725	Middle	5 530.00	80.92
5 725 ~ 5 850	Middle	5 775.00	80.32


Remark: See next page for measurement data.

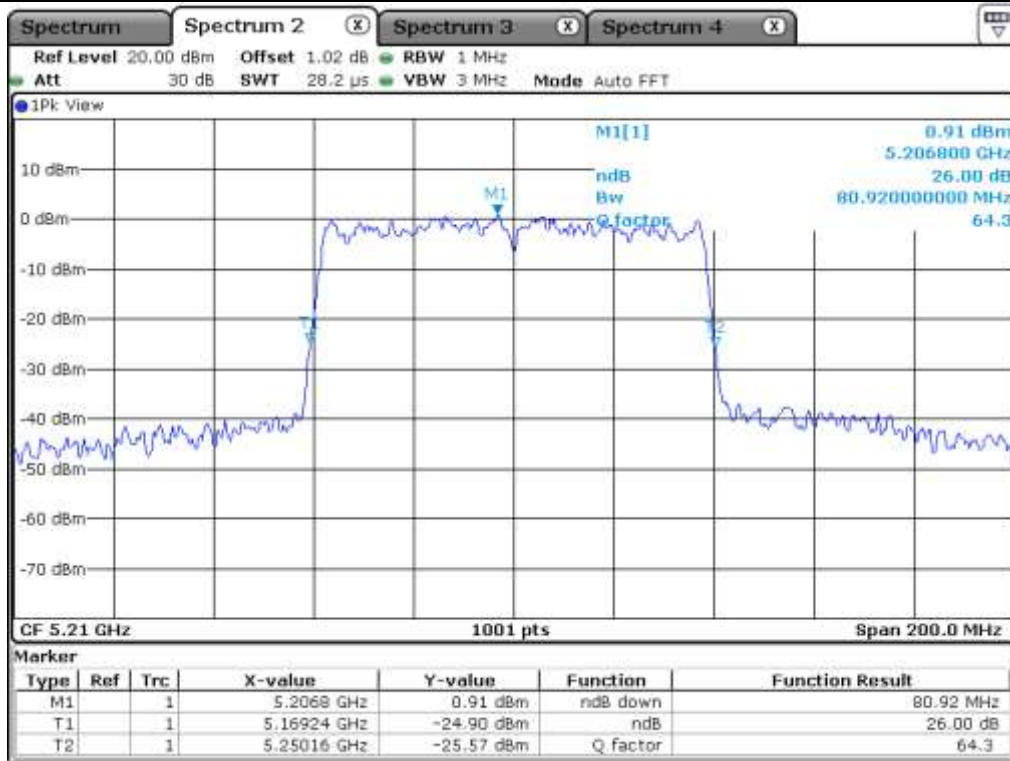


Middle Channel (5 210 MHz)

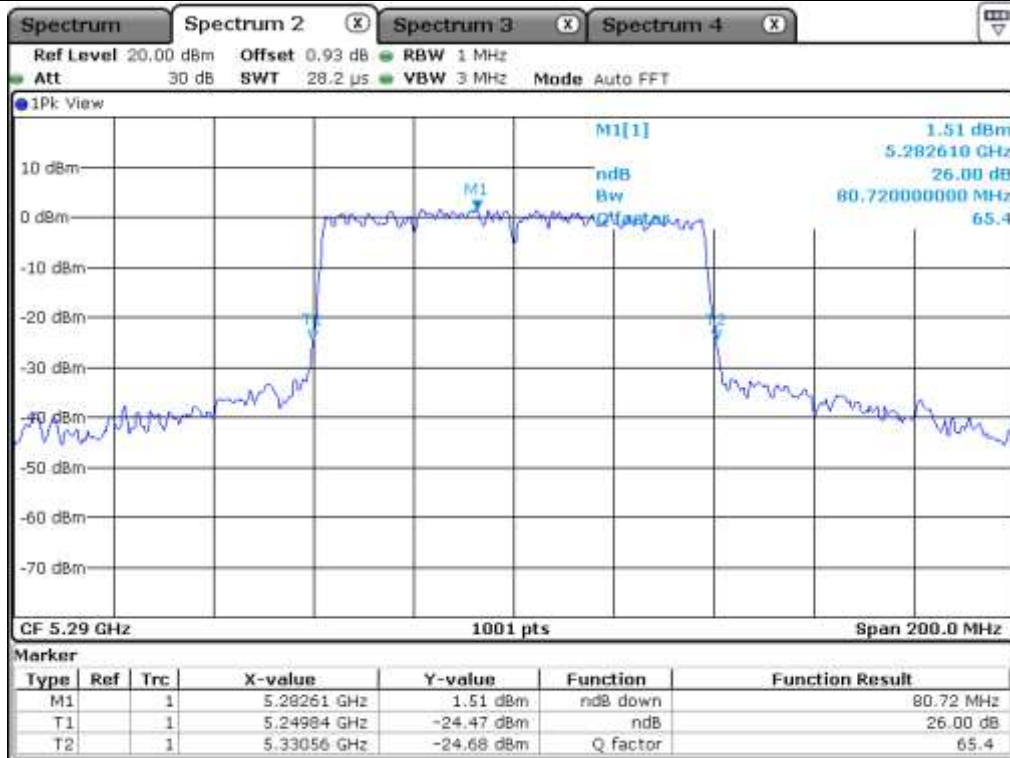

Middle Channel (5 290 MHz)

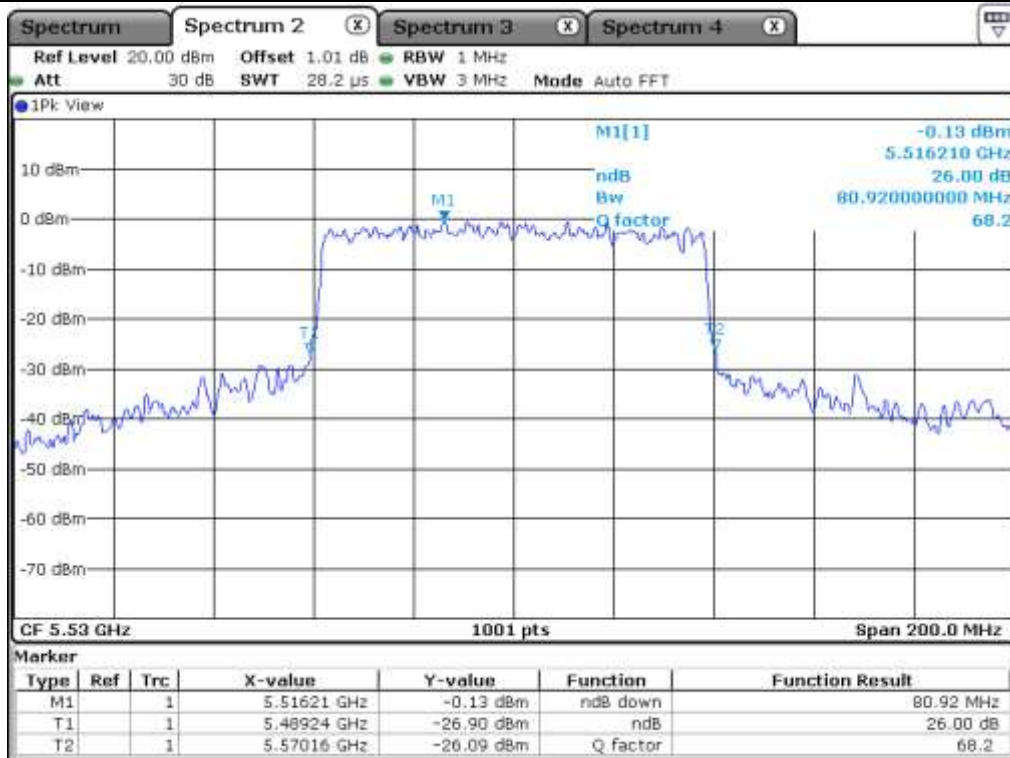

Middle Channel (5 530 MHz)

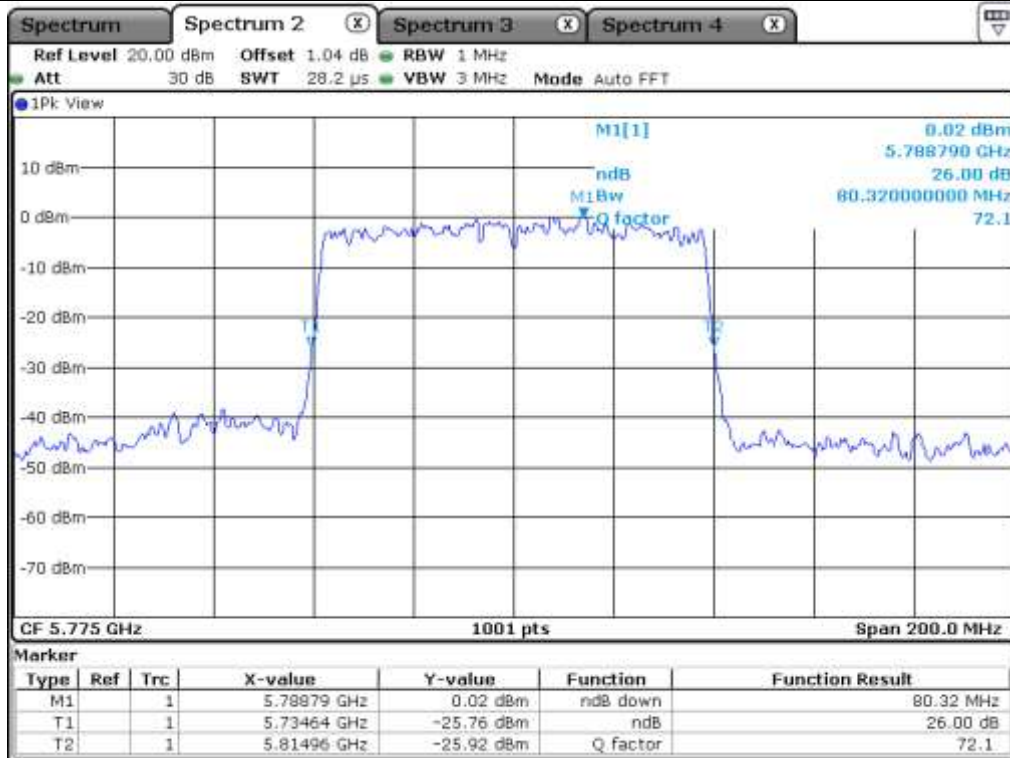


Middle Channel (5 775 MHz)

7.7.3 Test data for Staddle Channel_Antenna 0

-. Test Result : Pass


FREQUENCY RANGE (MHz)	FREQUENCY (MHz)	26 dB Bandwidth (MHz)
5 470 ~ 5 725	5 690.00	75.36
5 725 ~ 5 850	5 690.00	4.96

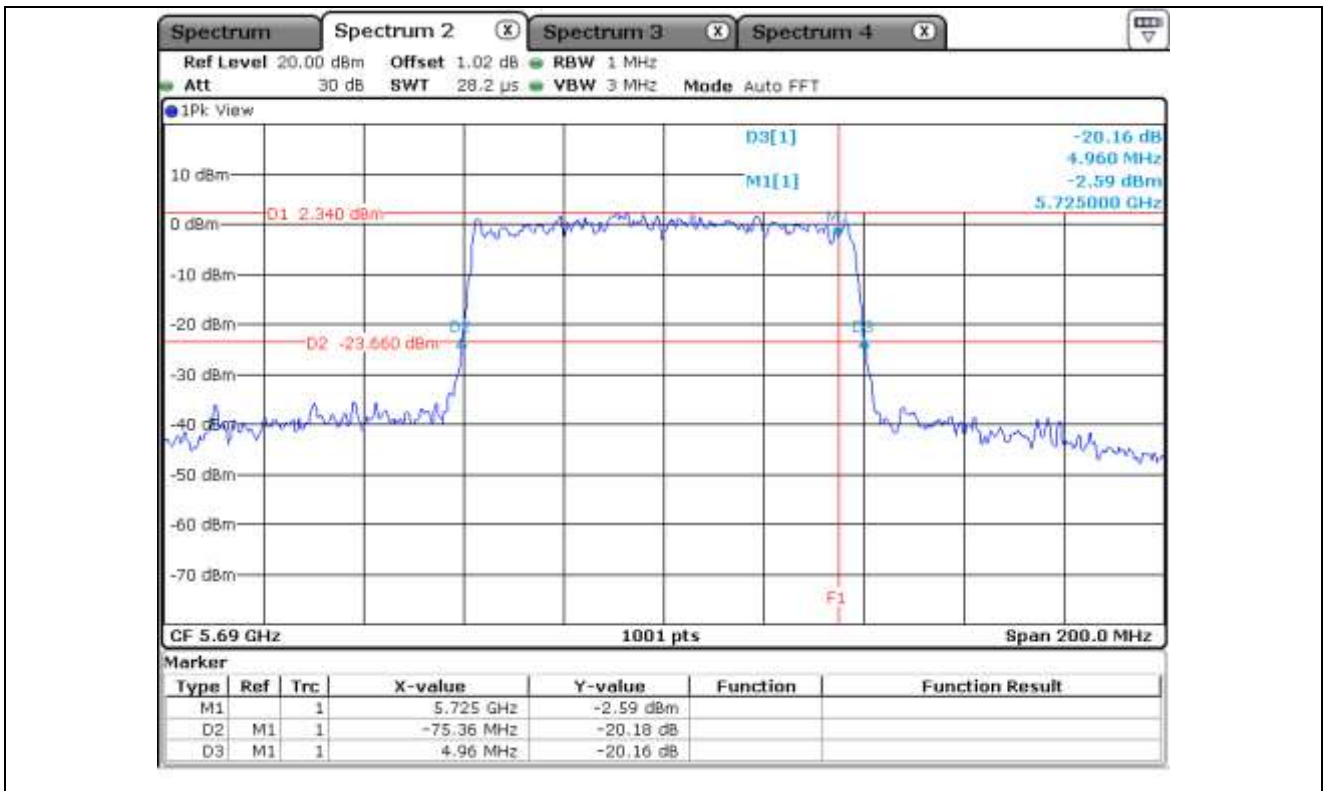

7.7.4 Test data for Staddle Channel_Antenna 1

-. Test Result : Pass

FREQUENCY RANGE (MHz)	FREQUENCY (MHz)	26 dB Bandwidth (MHz)
5 470 ~ 5 725	5 690.00	75.56
5 725 ~ 5 850	5 690.00	5.76

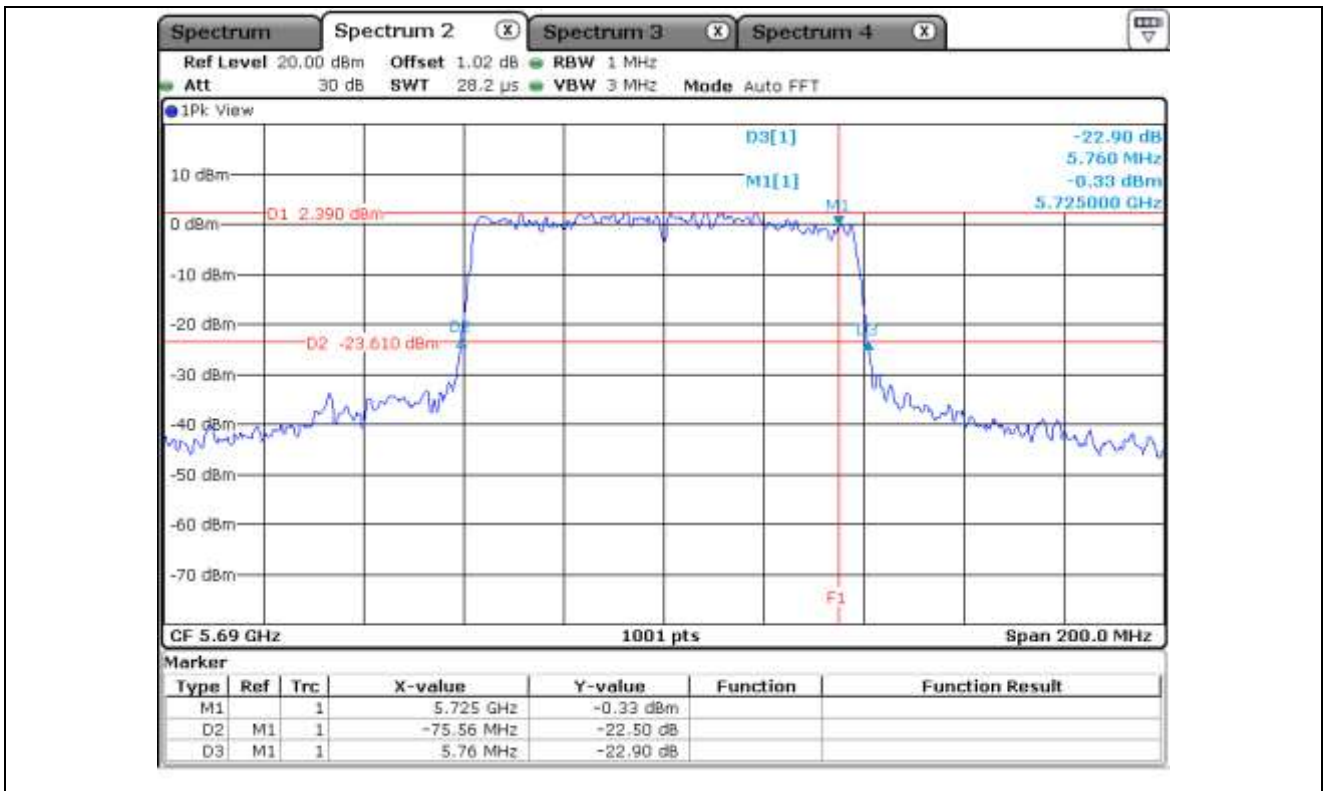

8. 6 dB BANDWIDTH

8.1 Operating environment

Temperature : 23 °C
 Relative humidity : 41 % R.H.

8.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz, and peak detection was used. The 6 dB bandwidth is defined as the total spectrum over which the power is higher than the peak power minus 6 dB.



8.3 Test Date

August 21, 2020 ~ September 08, 2020


8.4 Test data for 802.11a RLAN Mode


8.4.1 Test data for Antenna 0

-. Test Result : Pass


FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	6 dB Bandwidth (MHz)
5 725 ~ 5 850	Low	5 745.00	16.33
	Middle	5 785.00	16.33
	High	5 825.00	16.33

Remark: See next page for measurement data.

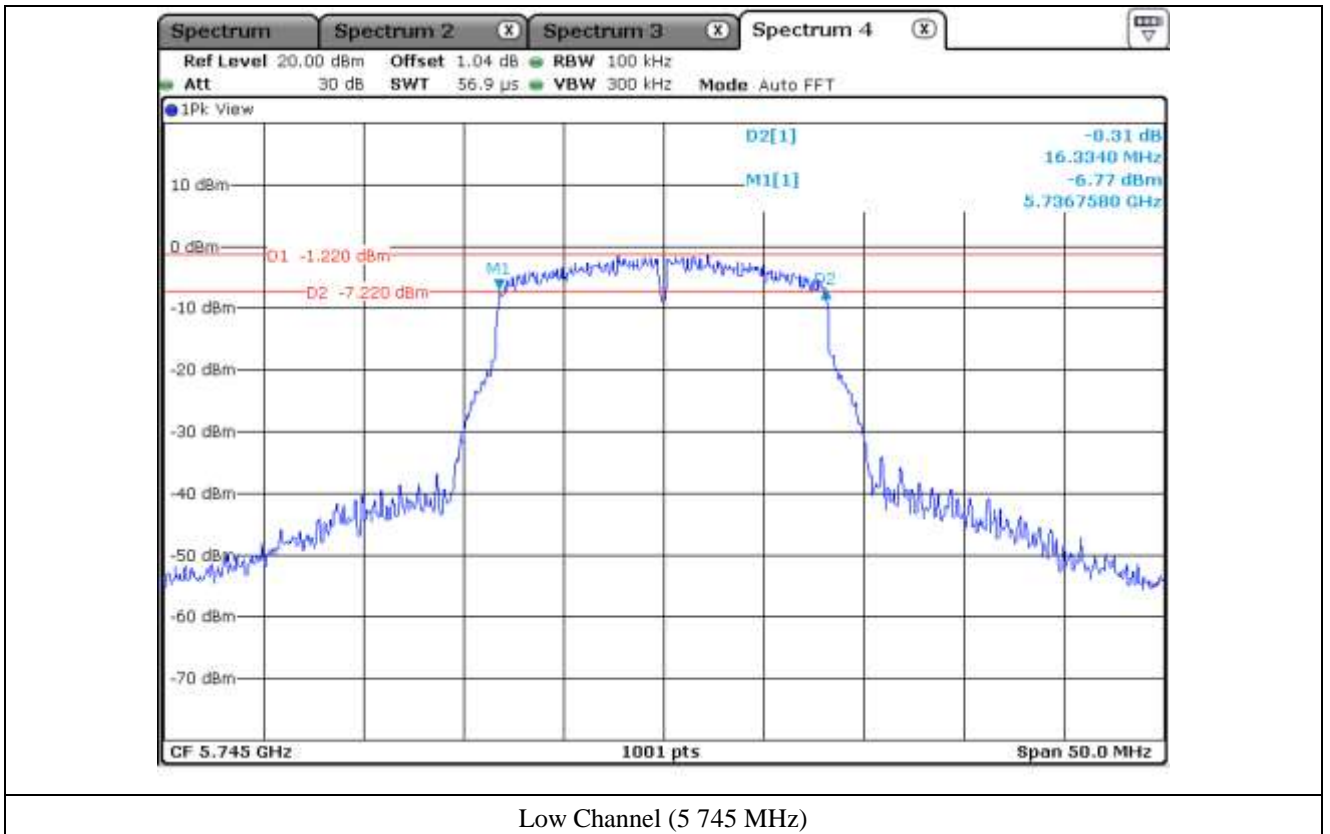

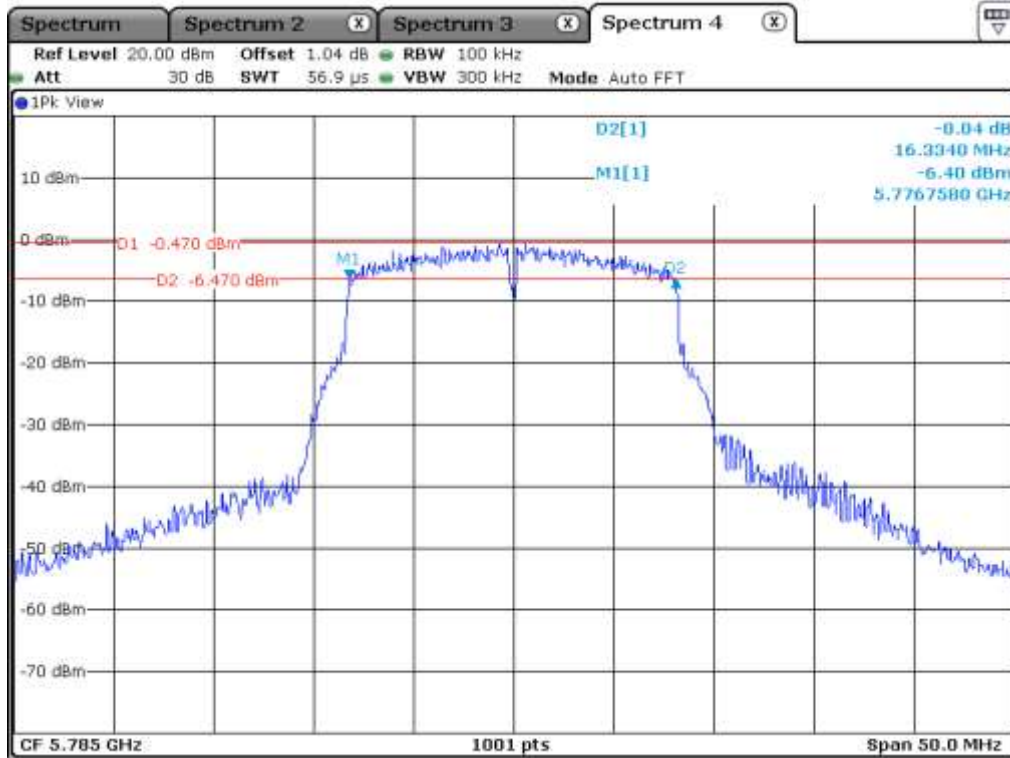

Middle Channel (5.785 MHz)

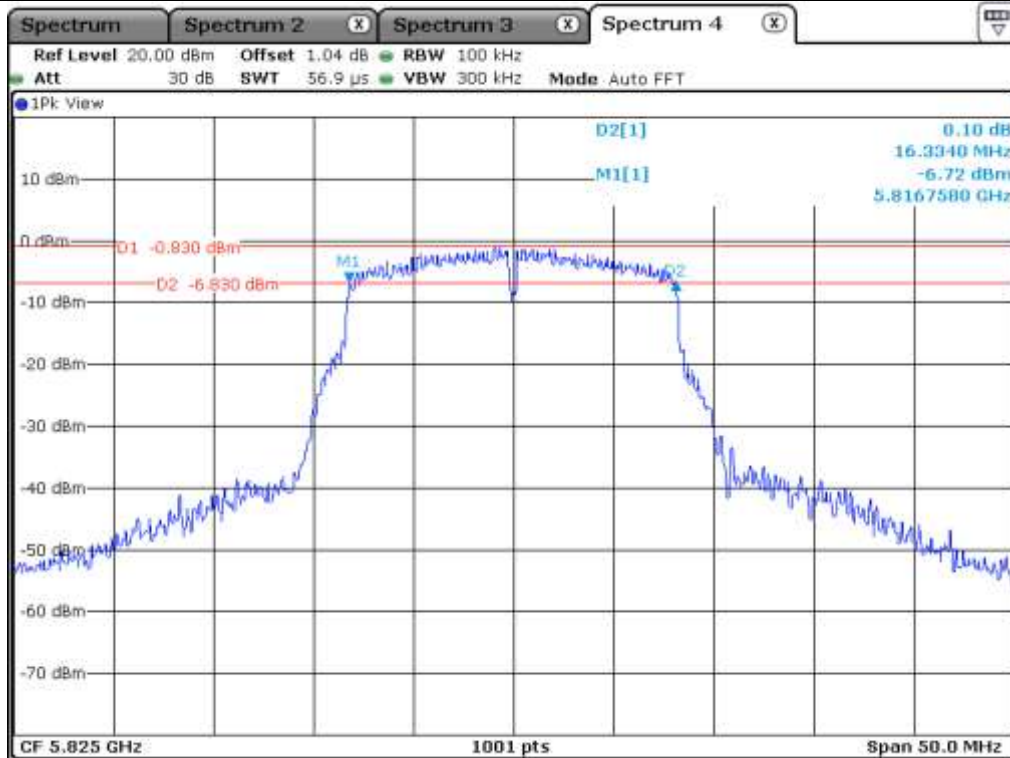


High Channel (5.825 MHz)

8.4.2 Test data for Antenna 1


-. Test Result : Pass

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	6 dB Bandwidth (MHz)
5 725 ~ 5 850	Low	5 745.00	16.33
	Middle	5 785.00	16.33
	High	5 825.00	16.33


Remark: See next page for measurement data.

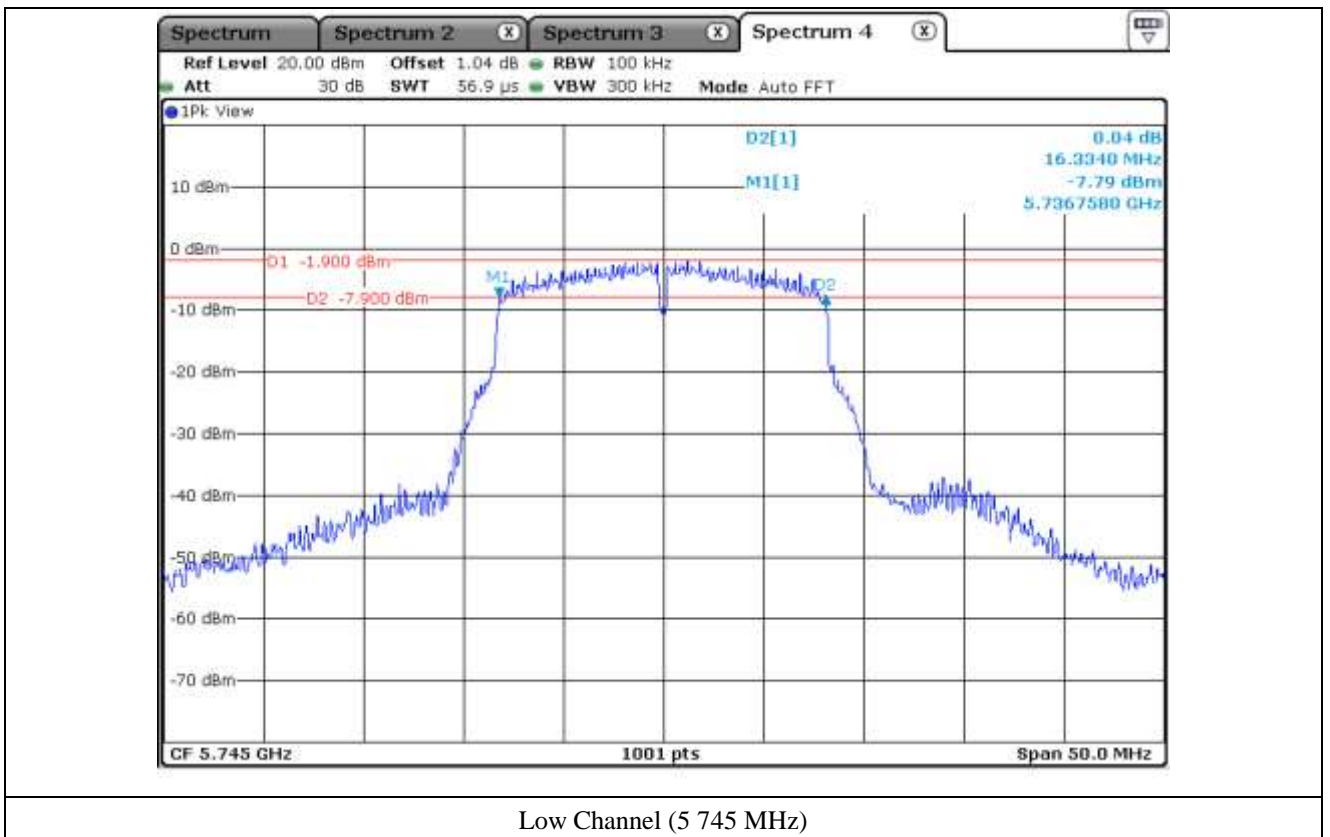

Low Channel (5 745 MHz)

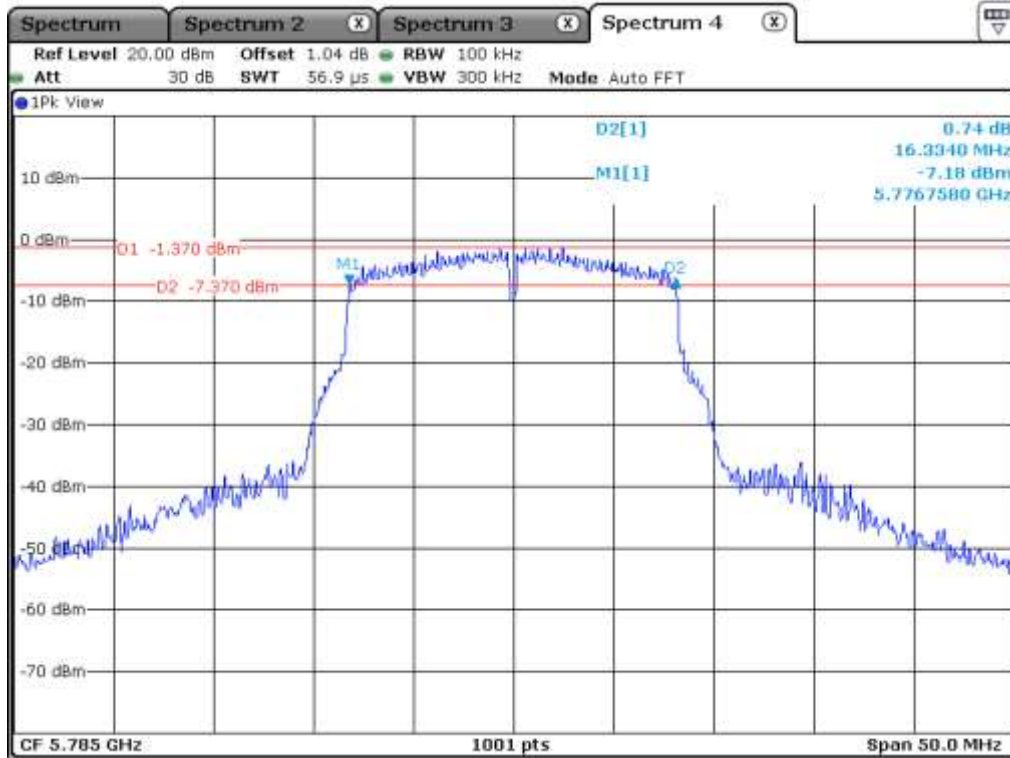

Middle Channel (5 785 MHz)

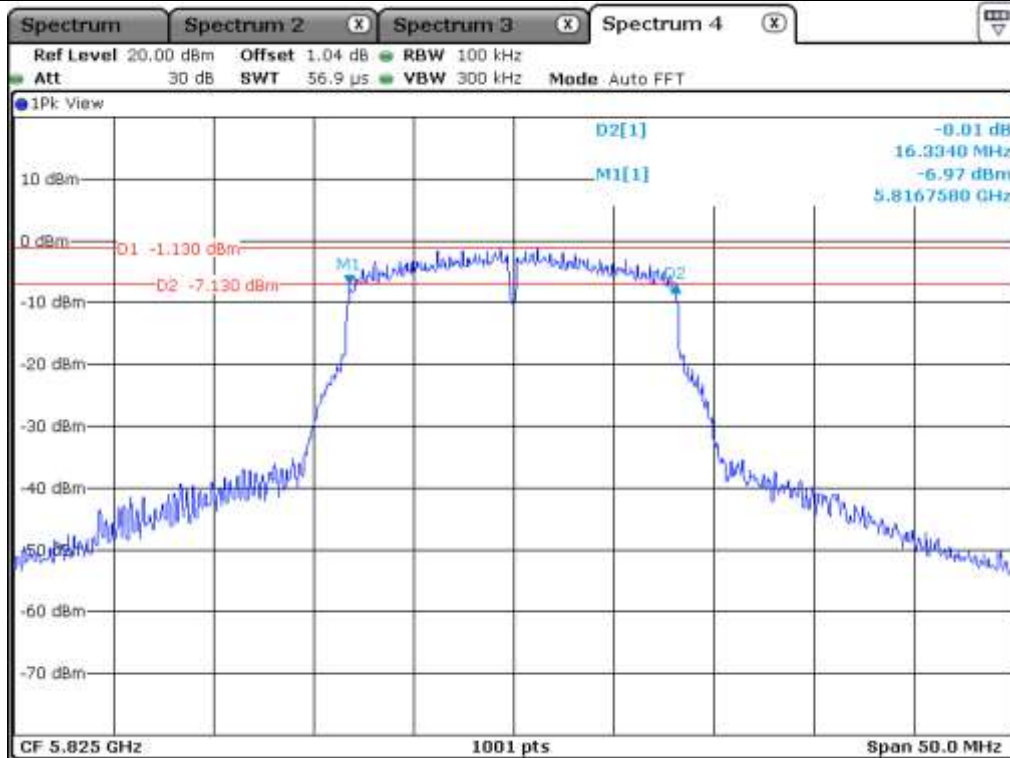

High Channel (5 825 MHz)


8.5 Test data for 802.11n_HT20 RLAN Mode

8.5.1 Test data for Antenna 0


-. Test Result : Pass

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	6 dB Bandwidth (MHz)
5 725 ~ 5 850	Low	5 745.00	17.53
	Middle	5 785.00	17.58
	High	5 825.00	17.53


Remark: See next page for measurement data.

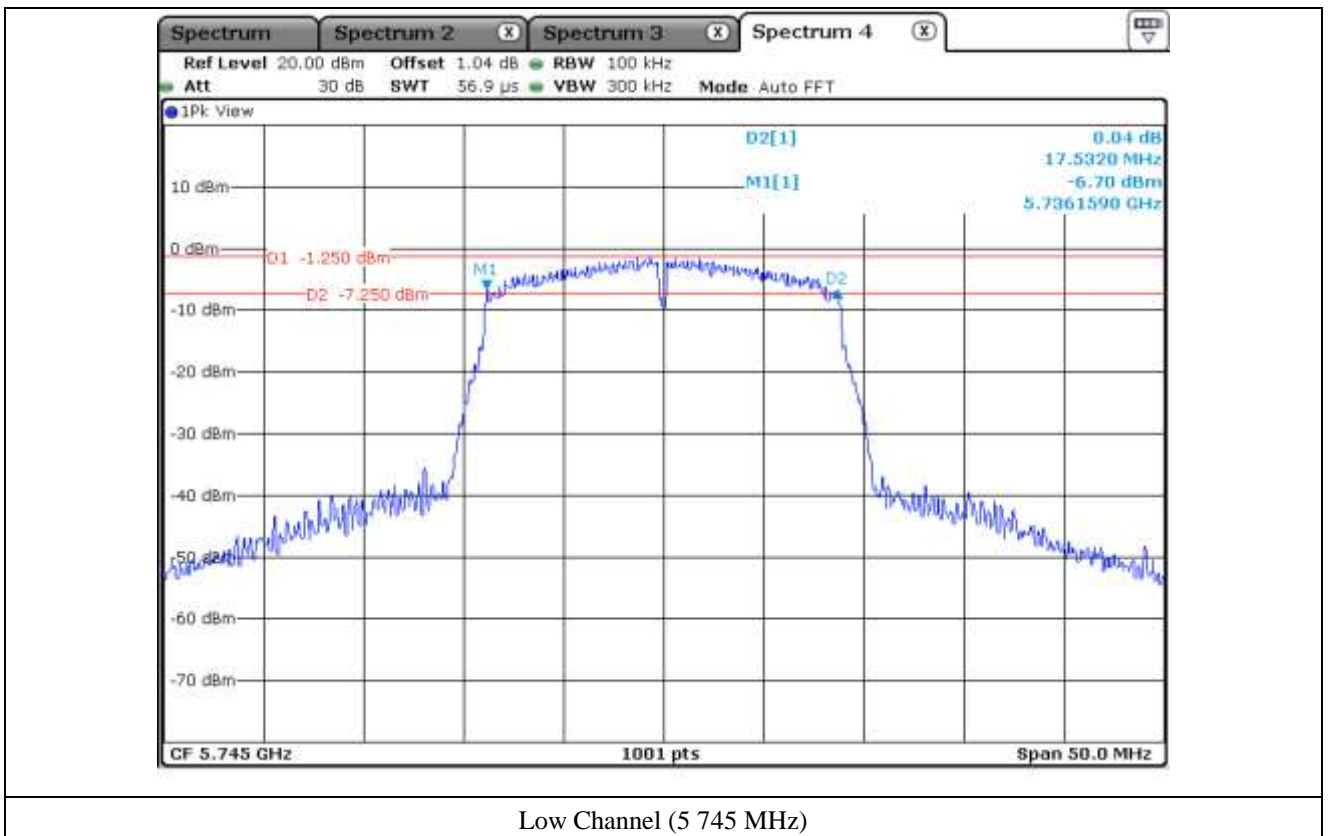

Low Channel (5 745 MHz)

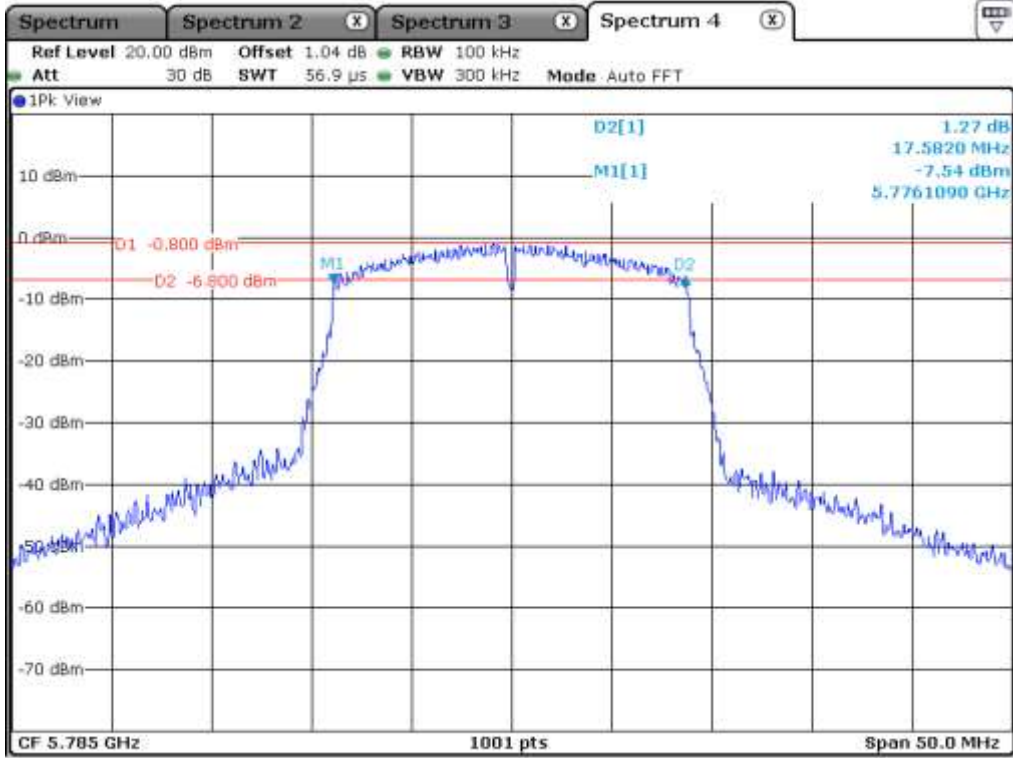

Middle Channel (5 785 MHz)

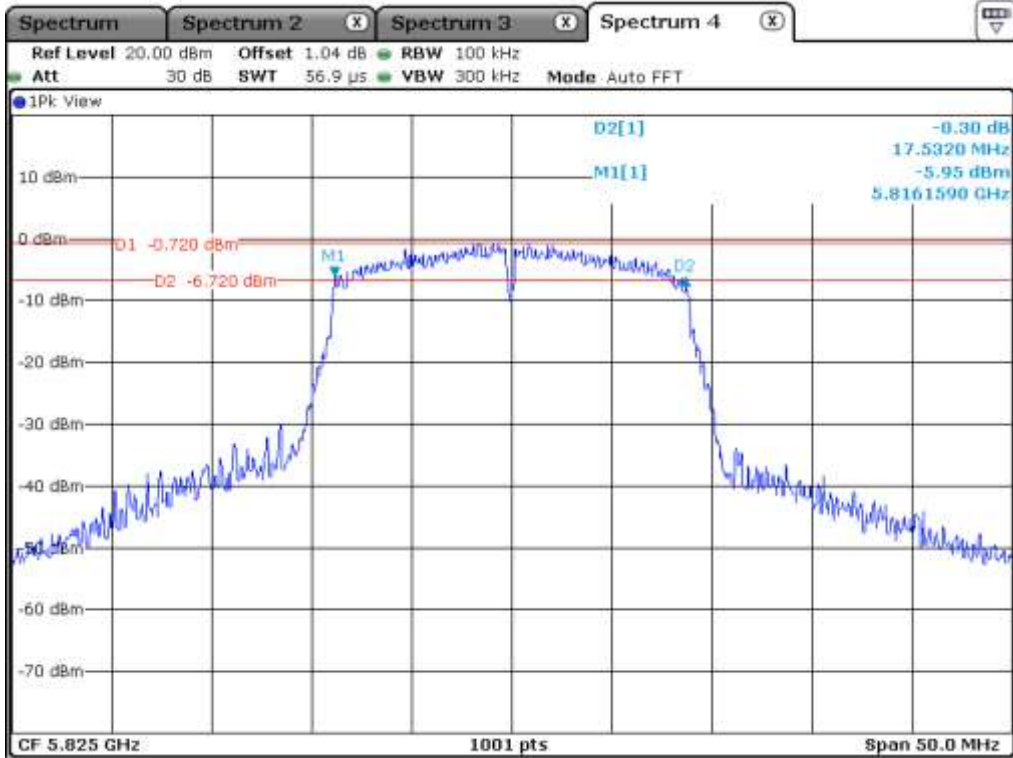


High Channel (5 825 MHz)


8.5.2 Test data for Antenna 1

-. Test Result : Pass


FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	6 dB Bandwidth (MHz)
5 725 ~ 5 850	Low	5 745.00	17.53
	Middle	5 785.00	17.53
	High	5 825.00	17.53

Remark: See next page for measurement data.

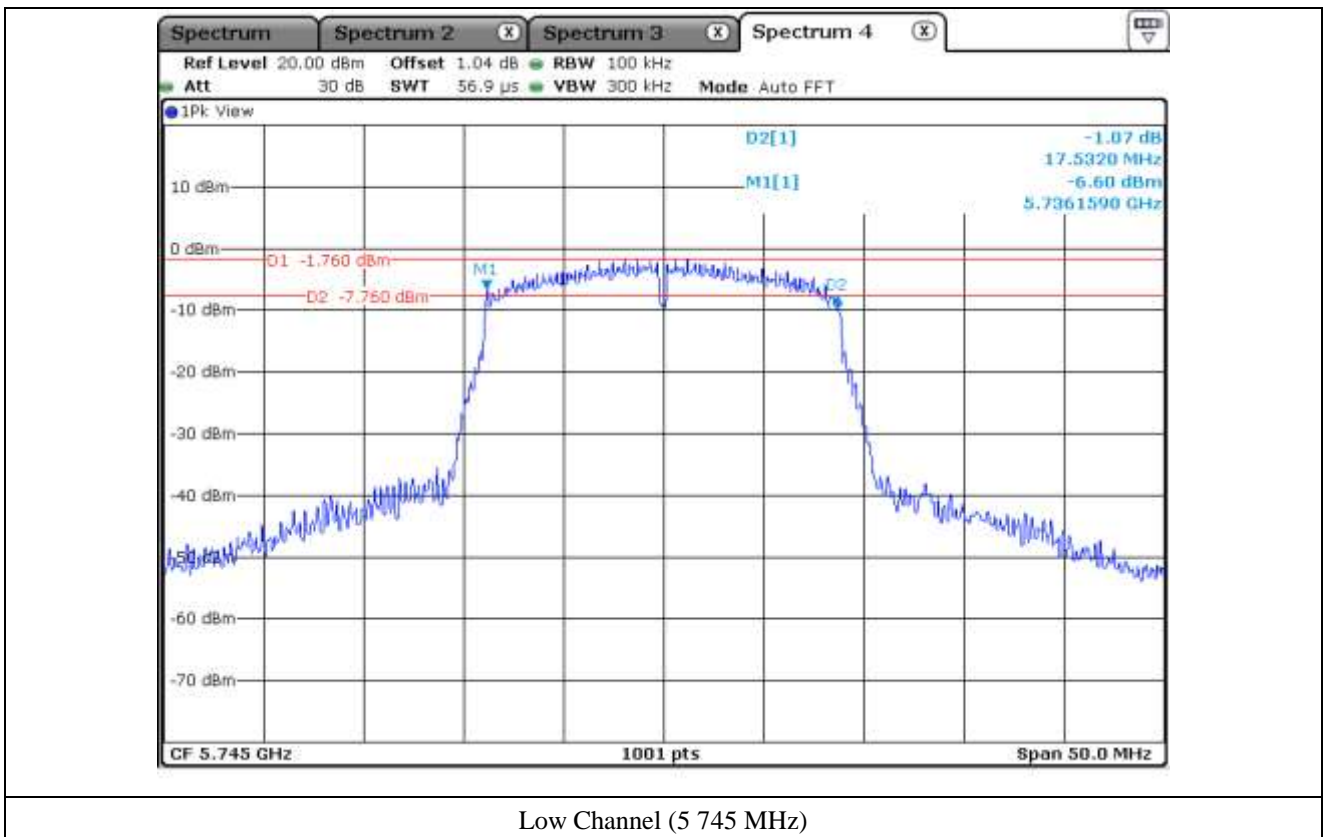

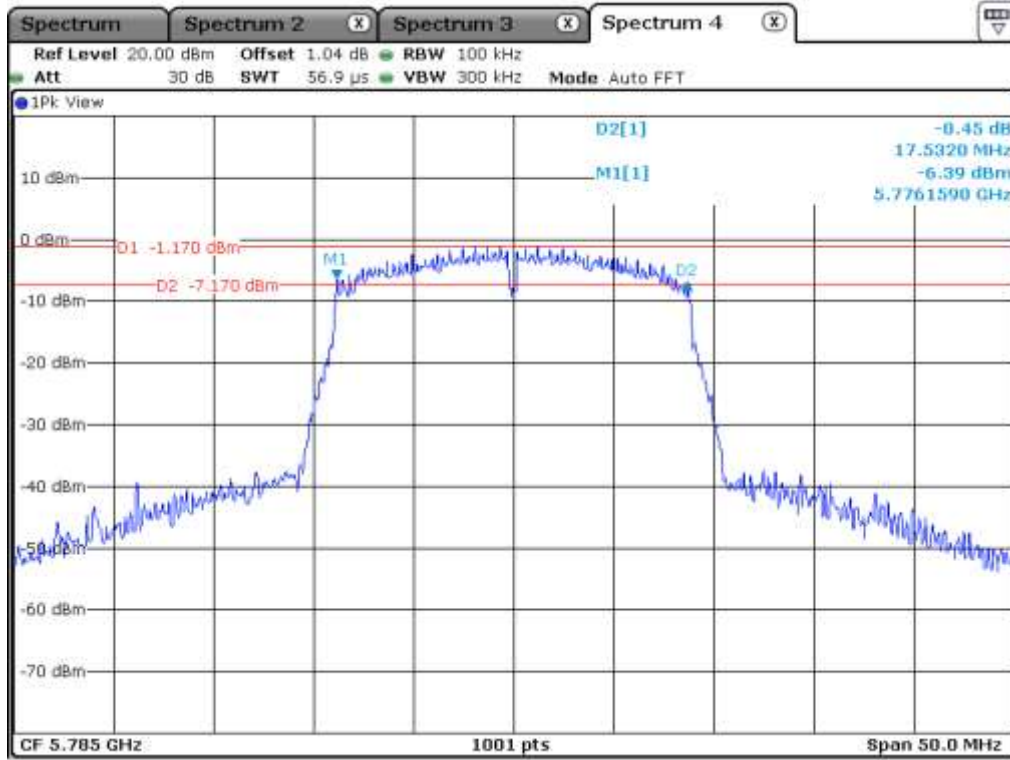

Middle Channel (5.785 MHz)

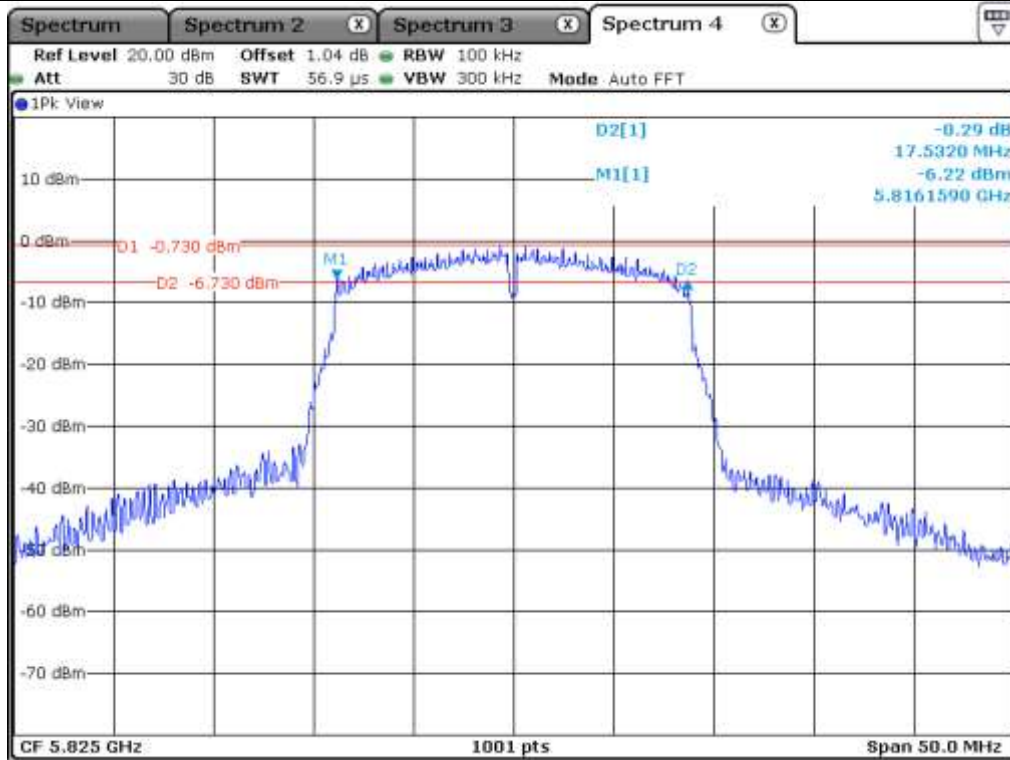

High Channel (5.825 MHz)


8.6 Test data for 802.11n_HT40 RLAN Mode

8.6.1 Test data for Antenna 0


-. Test Result : Pass

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	6 dB Bandwidth (MHz)
5 725 ~ 5 850	Low	5 755.00	36.26
	High	5 795.00	36.36

Remark: See next page for measurement data.

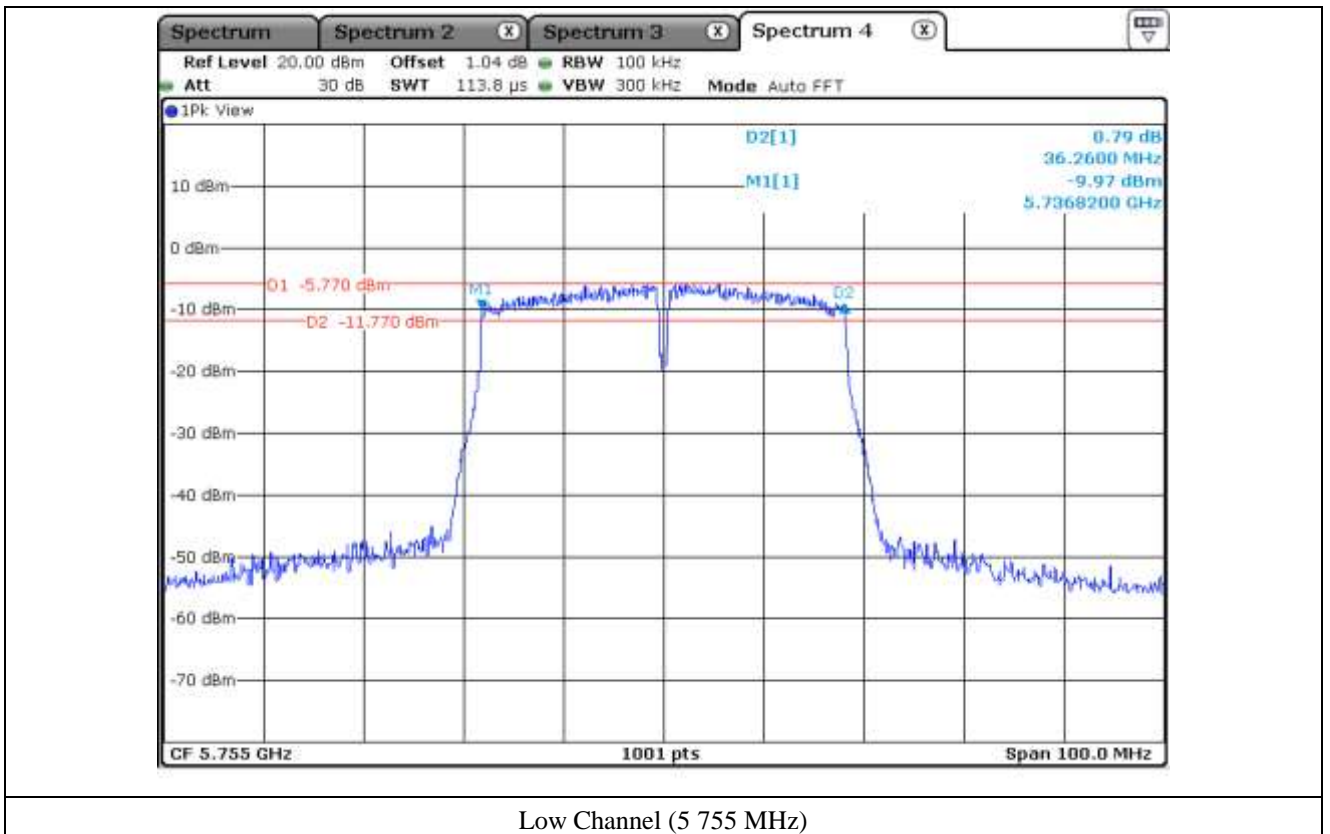

Low Channel (5 755 MHz)

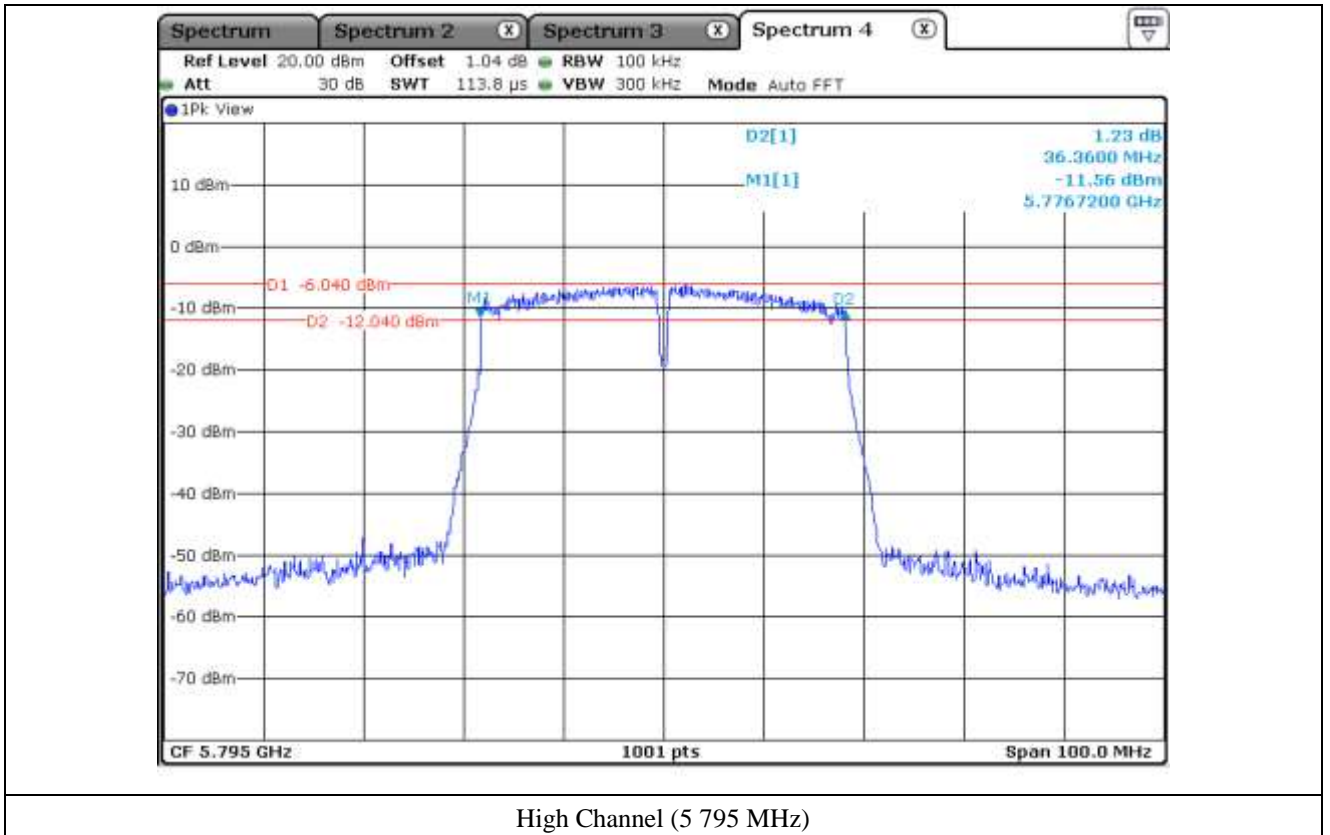


8.6.2 Test data for Antenna 1


-. Test Result : Pass

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	6 dB Bandwidth (MHz)
5 725 ~ 5 850	Low	5 755.00	36.36
	High	5 795.00	36.36

Remark: See next page for measurement data.

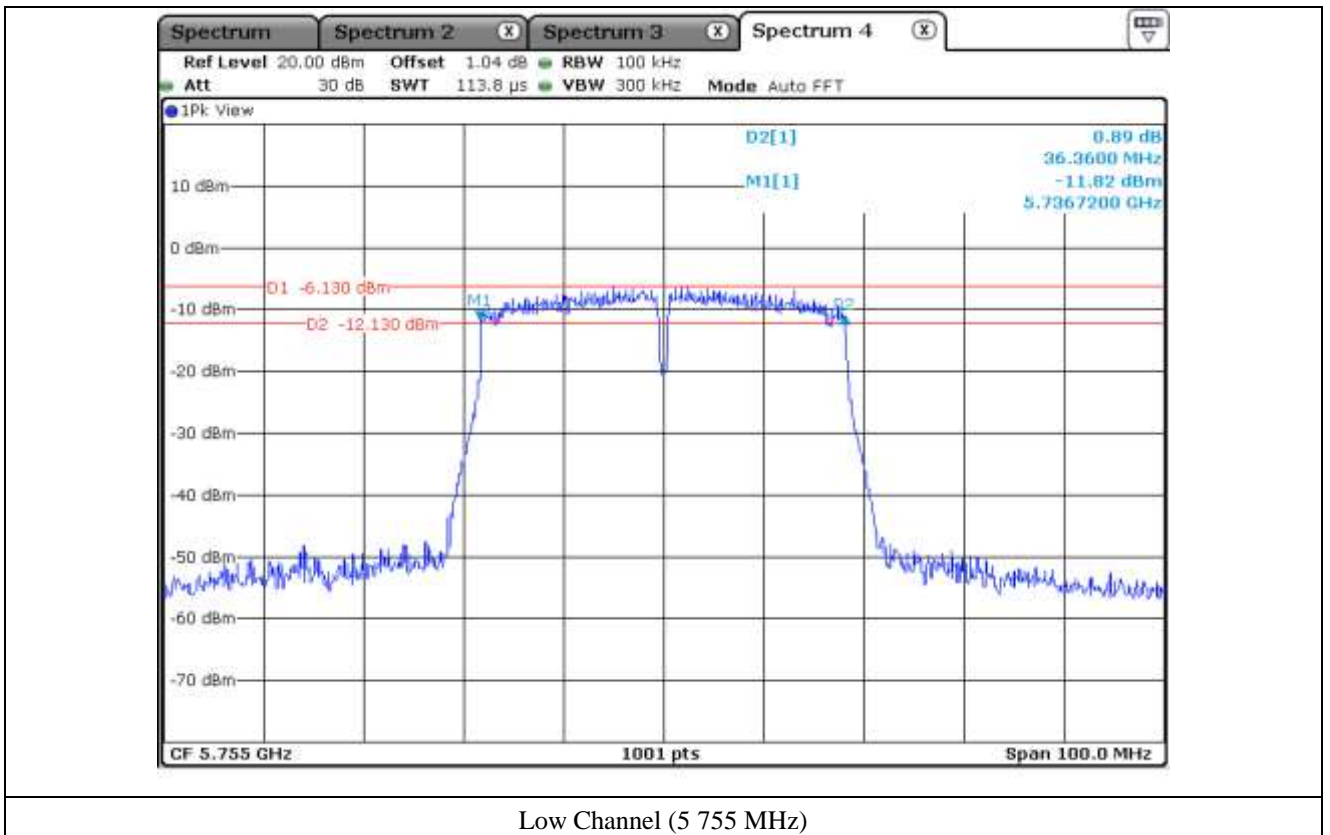

Low Channel (5 755 MHz)

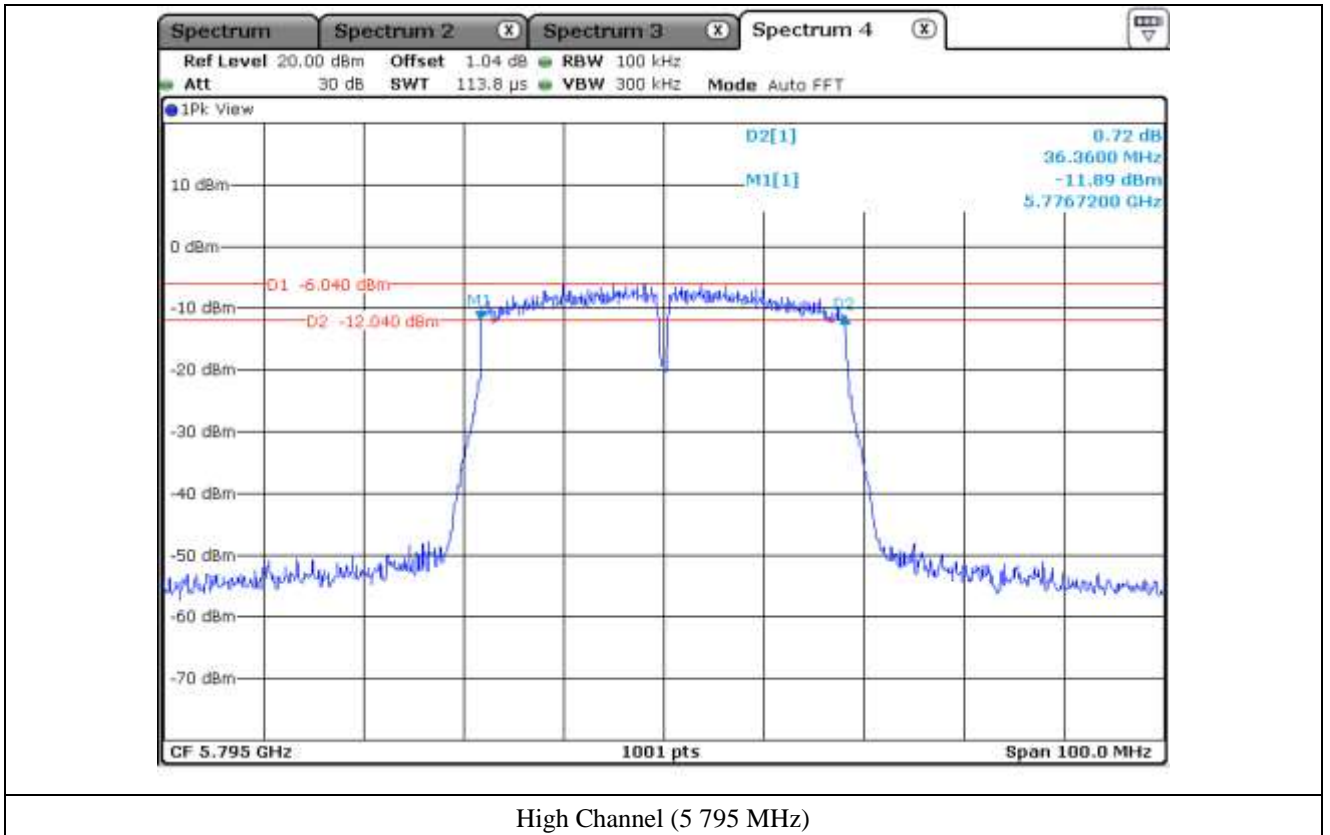

High Channel (5 795 MHz)


8.7 Test data for 802.11ac_VHT80 RLAN Mode

8.7.1 Test data for Antenna 0

-. Test Result : Pass

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	6 dB Bandwidth (MHz)
5 725 ~ 5 850	Middle	5 775.00	76.52

Remark: See next page for measurement data.

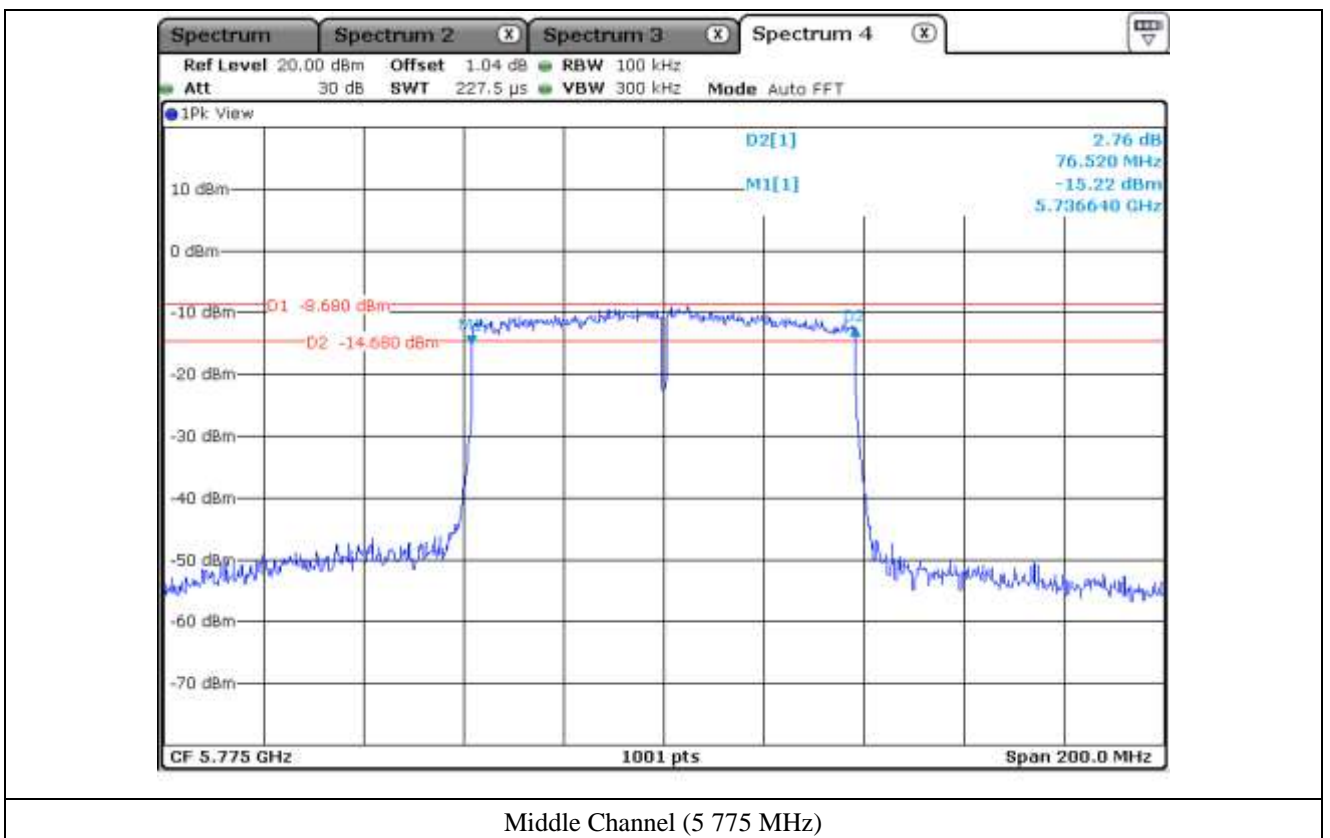


8.7.2 Test data for Antenna 1

- Test Result : Pass

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	6 dB Bandwidth (MHz)
5 725 ~ 5 850	Middle	5 775.00	76.52

Remark: See next page for measurement data.

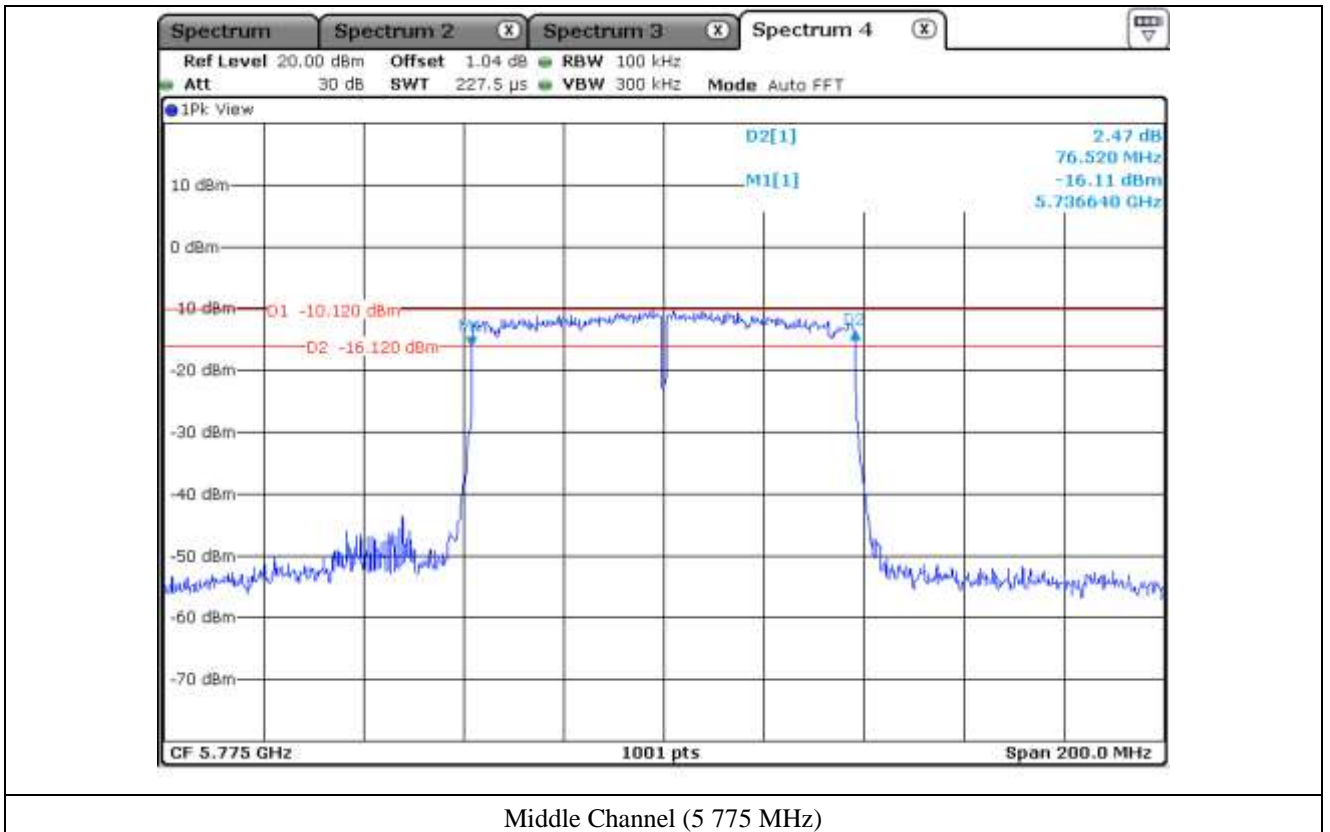


9. MAXIMUM CONDUCTED OUTPUT POWER

9.1 Operating environment

Temperature : 23 °C
Relative humidity : 41 % R.H.

9.2 Test set-up

The maximum peak output power was measured with the wide band sensor connected to the antenna output of the EUT. The Wide Band Sensor is measured when the EUT is transmitting at the appropriate center frequency its maximum power control level as described in Section E. 3.(KDB 789033 D02 General UNII Test Procedures New Rules v02r01). Since this measurement is made only during the ON time of the transmitter, no duty cycle correction is required.

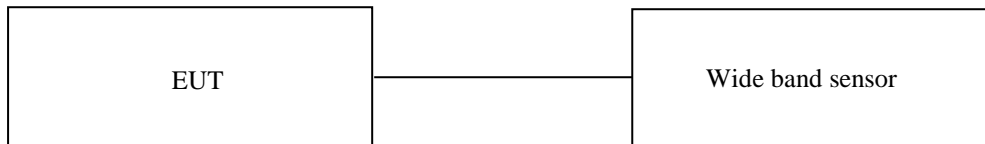

9.3 Test Date

August 21, 2020 ~ September 08, 2020

9.4 Test data for 802.11a RLAN Mode

9.4.1 Test data for Antenna 0

-. Test Result : Pass

-. Duty Cycle : > 98 %

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	MEASURED VALUE (dBm)	LIMIT (dBm)	MARGIN (dB)
5 150 ~ 5 250	Low	5 180.00	11.54	24.00	12.46
	Middle	5 220.00	12.04	24.00	11.96
	High	5 240.00	12.21	24.00	11.79
5 250 ~ 5 350	Low	5 260.00	12.37	24.00	11.63
	Middle	5 300.00	13.32	24.00	10.68
	High	5 320.00	13.65	24.00	10.35
5 470 ~ 5 725	Low	5 500.00	13.81	24.00	10.19
	Middle	5 580.00	14.11	24.00	9.89
	High	5 700.00	12.45	24.00	11.55
5 725 ~ 5 850	Low	5 745.00	13.21	30.00	16.79
	Middle	5 785.00	13.14	30.00	16.86
	High	5 825.00	13.12	30.00	16.88

Remark : Margin = Limit – Measured Value (=Power Sensor Reading + Cable Loss)

9.4.2 Test data for Antenna 1

- . Test Result : Pass

- . Duty Cycle : > 98 %

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	MEASURED VALUE (dBm)	LIMIT (dBm)	MARGIN (dB)
5 150 ~ 5 250	Low	5 180.00	12.21	24.00	11.79
	Middle	5 220.00	12.41	24.00	11.59
	High	5 240.00	12.42	24.00	11.58
5 250 ~ 5 350	Low	5 260.00	12.18	24.00	11.82
	Middle	5 300.00	11.84	24.00	12.16
	High	5 320.00	11.79	24.00	12.21
5 470 ~ 5 725	Low	5 500.00	10.76	24.00	13.24
	Middle	5 580.00	11.16	24.00	12.84
	High	5 700.00	9.56	24.00	14.44
5 725 ~ 5 850	Low	5 745.00	9.34	30.00	20.66
	Middle	5 785.00	10.04	30.00	19.96
	High	5 825.00	10.11	30.00	19.89

Remark : Margin = Limit – Measured Value (=Power Sensor Reading + Cable Loss)

9.4.3 Test data for Multiple Transmit

-. Test Result : Pass

-. Duty Cycle : > 98 %

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	MEASURED VALUE (dBm)	LIMIT (dBm)	MARGIN (dB)
5 150 ~ 5 250	Low	5 180.00	14.90	23.76	8.86
	Middle	5 220.00	15.24	23.76	8.52
	High	5 240.00	15.33	23.76	8.43
5 250 ~ 5 350	Low	5 260.00	15.29	24.00	8.71
	Middle	5 300.00	15.65	24.00	8.35
	High	5 320.00	15.83	24.00	8.17
5 470 ~ 5 725	Low	5 500.00	15.56	24.00	8.44
	Middle	5 580.00	15.89	24.00	8.11
	High	5 700.00	14.25	24.00	9.75
5 725 ~ 5 850	Low	5 745.00	14.70	30.00	15.30
	Middle	5 785.00	14.87	30.00	15.13
	High	5 825.00	14.88	30.00	15.12

Remark 1: Margin = Limit – Measured Value (=Power Sensor Reading + Cable Loss)

Remark 2: Calculated Output Power= $10\log (10^{(\text{Antenna0 Output Power}/10)} + 10^{(\text{Antenna1 Output Power}/10)})$

9.4.4 Test data for Staddle Channel_Antenna 0

-. Test Result : Pass

FREQUENCY RANGE (MHz)	FREQUENCY (MHz)	MEASURED VALUE (dBm)	LIMIT (dBm)	MARGIN (dB)
5 470 ~ 5 725	5 720.00	12.10	24.00	11.90
5 725 ~ 5 825	5 720.00	4.04	30.00	25.96

9.4.5 Test data for Staddle Channel_Antenna 1

-. Test Result : Pass

FREQUENCY RANGE (MHz)	FREQUENCY (MHz)	MEASURED VALUE (dBm)	LIMIT (dBm)	MARGIN (dB)
5 470 ~ 5 725	5 720.00	13.12	24.00	10.88
5 725 ~ 5 825	5 720.00	5.07	30.00	24.93

9.4.6 Test data for Staddle Channel_Multiple Transmit

-. Test Result : Pass

FREQUENCY RANGE (MHz)	FREQUENCY (MHz)	MEASURED VALUE (dBm)	LIMIT (dBm)	MARGIN (dB)
5 470 ~ 5 725	5 720.00	15.65	24.00	8.35
5 725 ~ 5 825	5 720.00	7.60	30.00	22.40

Remark 1 : Margin = Limit – Measured Value (=Receiver Reading + Cable Loss)

Remark 2 : Calculated Output Power= $10\log (10^{(\text{Antenna1 Output Power}/10)}+10^{(\text{Antenna2 Output Power}/10)})$

9.5 Test data for 802.11n_HT20 RLAN Mode

9.5.1 Test data for Antenna 0

-. Test Result : Pass

-. Duty Cycle : > 98 %

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	MEASURED VALUE (dBm)	LIMIT (dBm)	MARGIN (dB)
5 150 ~ 5 250	Low	5 180.00	11.42	24.00	12.58
	Middle	5 220.00	11.95	24.00	12.05
	High	5 240.00	11.87	24.00	12.13
5 250 ~ 5 350	Low	5 260.00	12.23	24.00	11.77
	Middle	5 300.00	13.48	24.00	10.52
	High	5 320.00	13.57	24.00	10.43
5 470 ~ 5 725	Low	5 500.00	13.55	24.00	10.45
	Middle	5 580.00	13.95	24.00	10.05
	High	5 700.00	12.26	24.00	11.74
5 725 ~ 5 850	Low	5 745.00	12.84	30.00	17.16
	Middle	5 785.00	12.65	30.00	17.35
	High	5 825.00	12.93	30.00	17.07

Remark : Margin = Limit – Measured Value (=Power Sensor Reading + Cable Loss)

9.5.2 Test data for Antenna 1

- Test Result : Pass

- Duty Cycle : > 98 %

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	MEASURED VALUE (dBm)	LIMIT (dBm)	MARGIN (dB)
5 150 ~ 5 250	Low	5 180.00	11.72	24.00	12.28
	Middle	5 220.00	12.05	24.00	11.95
	High	5 240.00	12.11	24.00	11.89
5 250 ~ 5 350	Low	5 260.00	11.88	24.00	12.12
	Middle	5 300.00	11.52	24.00	12.48
	High	5 320.00	11.44	24.00	12.56
5 470 ~ 5 725	Low	5 500.00	10.45	24.00	13.55
	Middle	5 580.00	10.89	24.00	13.11
	High	5 700.00	9.18	24.00	14.82
5 725 ~ 5 850	Low	5 745.00	9.29	30.00	20.71
	Middle	5 785.00	9.44	30.00	20.56
	High	5 825.00	9.58	30.00	20.42

Remark : Margin = Limit – Measured Value (=Power Sensor Reading + Cable Loss)

9.5.3 Test data for Multiple Transmit

-. Test Result : Pass

-. Duty Cycle : > 98 %

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	MEASURED VALUE (dBm)	LIMIT (dBm)	MARGIN (dB)
5 150 ~ 5 250	Low	5 180.00	14.58	23.76	9.18
	Middle	5 220.00	15.01	23.76	8.75
	High	5 240.00	15.00	23.76	8.76
5 250 ~ 5 350	Low	5 260.00	15.07	24.00	8.93
	Middle	5 300.00	15.62	24.00	8.38
	High	5 320.00	15.64	24.00	8.36
5 470 ~ 5 725	Low	5 500.00	15.28	24.00	8.72
	Middle	5 580.00	15.69	24.00	8.31
	High	5 700.00	14.00	24.00	10.00
5 725 ~ 5 850	Low	5 745.00	14.43	30.00	15.57
	Middle	5 785.00	14.35	30.00	15.65
	High	5 825.00	14.58	30.00	15.42

Remark 1: Margin = Limit – Measured Value (=Power Sensor Reading + Cable Loss)

Remark 2: Calculated Output Power= $10\log (10^{(\text{Antenna0 Output Power}/10)} + 10^{(\text{Antenna1 Output Power}/10)})$

9.5.4 Test data for Staddle Channel_Antenna 0

-. Test Result : Pass

FREQUENCY RANGE (MHz)	FREQUENCY (MHz)	MEASURED VALUE (dBm)	LIMIT (dBm)	MARGIN (dB)
5 470 ~ 5 725	5 720.00	12.27	24.00	11.73
5 725 ~ 5 825	5 720.00	4.66	30.00	25.34

9.5.5 Test data for Staddle Channel_Antenna 1

-. Test Result : Pass

FREQUENCY RANGE (MHz)	FREQUENCY (MHz)	MEASURED VALUE (dBm)	LIMIT (dBm)	MARGIN (dB)
5 470 ~ 5 725	5 720.00	13.00	24.00	11.00
5 725 ~ 5 825	5 720.00	5.45	30.00	24.55

9.5.6 Test data for Staddle Channel_Multiple Transmit

-. Test Result : Pass

FREQUENCY RANGE (MHz)	FREQUENCY (MHz)	MEASURED VALUE (dBm)	LIMIT (dBm)	MARGIN (dB)
5 470 ~ 5 725	5 720.00	15.66	24.00	8.34
5 725 ~ 5 825	5 720.00	8.08	30.00	21.92

Remark 1 : Margin = Limit – Measured Value (=Receiver Reading + Cable Loss)

Remark 2 : Calculated Output Power= $10\log (10^{(\text{Antenna1 Output Power}/10)}+10^{(\text{Antenna2 Output Power}/10)})$

9.6 Test data for 802.11n_HT40 RLAN Mode

9.6.1 Test data for Antenna 0

-. Test Result : Pass
 -. Duty Cycle : > 98 %

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	MEASURED VALUE (dBm)	LIMIT (dBm)	MARGIN (dB)
5 150 ~ 5 250	Low	5 190.00	9.61	24.00	14.39
	High	5 230.00	10.15	24.00	13.85
5 250 ~ 5 350	Low	5 270.00	10.25	24.00	13.75
	High	5 310.00	11.60	24.00	12.40
5 470 ~ 5 725	Low	5 510.00	12.01	24.00	11.99
	Middle	5 550.00	12.16	24.00	11.84
	High	5 670.00	11.85	24.00	12.15
5 725 ~ 5 850	Low	5 755.00	10.91	30.00	19.09
	High	5 795.00	11.03	30.00	18.97

Remark : Margin = Limit – Measured Value (=Power Sensor Reading + Cable Loss)

9.6.2 Test data for Antenna 1

-. Test Result : Pass
 -. Duty Cycle : > 98 %

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	MEASURED VALUE (dBm)	LIMIT (dBm)	MARGIN (dB)
5 150 ~ 5 250	Low	5 190.00	9.85	24.00	14.15
	High	5 230.00	10.14	24.00	13.86
5 250 ~ 5 350	Low	5 270.00	10.35	24.00	13.65
	High	5 310.00	9.83	24.00	14.17
5 470 ~ 5 725	Low	5 510.00	10.46	24.00	13.54
	Middle	5 550.00	11.08	24.00	12.92
	High	5 670.00	11.38	24.00	12.62
5 725 ~ 5 850	Low	5 755.00	10.86	30.00	19.14
	High	5 795.00	11.07	30.00	18.93

Remark : Margin = Limit – Measured Value (=Power Sensor Reading + Cable Loss)

9.6.3 Test data for Multiple Transmit

-. Test Result : Pass

-. Duty Cycle : > 98 %

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	MEASURED VALUE (dBm)	LIMIT (dBm)	MARGIN (dB)
5 150 ~ 5 250	Low	5 190.00	12.74	23.76	11.02
	High	5 230.00	13.16	23.76	10.60
5 250 ~ 5 350	Low	5 270.00	13.31	24.00	10.69
	High	5 310.00	13.81	24.00	10.19
5 470 ~ 5 725	Low	5 510.00	14.31	24.00	9.69
	Middle	5 550.00	14.66	24.00	9.34
	High	5 670.00	14.63	24.00	9.37
5 725 ~ 5 850	Low	5 755.00	13.90	30.00	16.10
	High	5 795.00	14.06	30.00	15.94

Remark 1: Margin = Limit – Measured Value (=Power Sensor Reading + Cable Loss)

Remark 2: Calculated Output Power= $10\log (10^{(\text{Antenna0 Output Power}/10)} + 10^{(\text{Antenna1 Output Power}/10)})$

9.6.4 Test data for Staddle Channel_Antenna 0

-. Test Result : Pass

FREQUENCY RANGE (MHz)	FREQUENCY (MHz)	MEASURED VALUE (dBm)	LIMIT (dBm)	MARGIN (dB)
5 470 ~ 5 725	5 710.00	10.69	24.00	13.31
5 725 ~ 5 825	5 710.00	-1.44	30.00	31.44

9.6.5 Test data for Staddle Channel_Antenna 1

-. Test Result : Pass

FREQUENCY RANGE (MHz)	FREQUENCY (MHz)	MEASURED VALUE (dBm)	LIMIT (dBm)	MARGIN (dB)
5 470 ~ 5 725	5 710.00	10.79	24.00	13.21
5 725 ~ 5 825	5 710.00	-1.40	30.00	31.40

9.6.6 Test data for Staddle Channel_Multiple Transmit

-. Test Result : Pass

FREQUENCY RANGE (MHz)	FREQUENCY (MHz)	MEASURED VALUE (dBm)	LIMIT (dBm)	MARGIN (dB)
5 470 ~ 5 725	5 710.00	13.75	24.00	10.25
5 725 ~ 5 825	5 710.00	1.59	30.00	28.41

Remark 1 : Margin = Limit – Measured Value (=Receiver Reading + Cable Loss)

Remark 2 : Calculated Output Power= $10\log (10^{(\text{Antenna1 Output Power}/10)}+10^{(\text{Antenna2 Output Power}/10)})$

9.7 Test data for 802.11ac_HT80 RLAN Mode

9.7.1 Test data for Antenna 0

-. Test Result : Pass
 -. Duty Cycle : > 98 %

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	MEASURED VALUE (dBm)	LIMIT (dBm)	MARGIN (dB)
5 150 ~ 5 250	Low	5 210.00	9.97	24.00	14.03
5 250 ~ 5 350	Low	5 290.00	11.17	24.00	12.83
5 470 ~ 5 725	Low	5 530.00	11.80	24.00	12.20
5 725 ~ 5 850	Low	5 775.00	10.95	30.00	19.05

Remark : Margin = Limit – Measured Value (=Power Sensor Reading + Cable Loss)

9.7.2 Test data for Antenna 1

-. Test Result : Pass
 -. Duty Cycle : > 98 %

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	MEASURED VALUE (dBm)	LIMIT (dBm)	MARGIN (dB)
5 150 ~ 5 250	Low	5 210.00	9.84	24.00	14.16
5 250 ~ 5 350	Low	5 290.00	9.71	24.00	14.29
5 470 ~ 5 725	Low	5 530.00	10.95	24.00	13.05
5 725 ~ 5 850	Low	5 775.00	10.91	30.00	19.09

Remark : Margin = Limit – Measured Value (=Power Sensor Reading + Cable Loss)

9.7.3 Test data for Multiple Transmit

-. Test Result : Pass

-. Duty Cycle : > 98 %

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	MEASURED VALUE (dBm)	LIMIT (dBm)	MARGIN (dB)
5 150 ~ 5 250	Low	5 210.00	12.92	23.76	10.84
5 250 ~ 5 350	Low	5 290.00	13.51	24.00	10.49
5 470 ~ 5 725	Low	5 530.00	14.41	24.00	9.59
5 725 ~ 5 850	Low	5 775.00	13.94	30.00	16.06

Remark 1: Margin = Limit – Measured Value (=Power Sensor Reading + Cable Loss)

Remark 2: Calculated Output Power= $10\log (10^{(\text{Antenna0 Output Power}/10)} + 10^{(\text{Antenna1 Output Power}/10)})$

9.7.4 Test data for Staddle Channel_Antenna 0

-. Test Result : Pass

FREQUENCY RANGE (MHz)	FREQUENCY (MHz)	MEASURED VALUE (dBm)	LIMIT (dBm)	MARGIN (dB)
5 470 ~ 5 725	5 690.00	11.65	24.00	12.35
5 725 ~ 5 825	5 690.00	-3.22	30.00	33.22

9.7.5 Test data for Staddle Channel_Antenna 1

-. Test Result : Pass

FREQUENCY RANGE (MHz)	FREQUENCY (MHz)	MEASURED VALUE (dBm)	LIMIT (dBm)	MARGIN (dB)
5 470 ~ 5 725	5 690.00	12.23	24.00	11.77
5 725 ~ 5 825	5 690.00	-2.70	30.00	32.70

9.7.6 Test data for Staddle Channel_Multiple Transmit

-. Test Result : Pass

FREQUENCY RANGE (MHz)	FREQUENCY (MHz)	MEASURED VALUE (dBm)	LIMIT (dBm)	MARGIN (dB)
5 470 ~ 5 725	5 690.00	14.96	24.00	9.04
5 725 ~ 5 825	5 690.00	0.06	30.00	29.94

Remark 1 : Margin = Limit – Measured Value (=Receiver Reading + Cable Loss)

Remark 2 : Calculated Output Power= $10\log (10^{(\text{Antenna1 Output Power}/10)}+10^{(\text{Antenna2 Output Power}/10)})$