




CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2021-03423
 Page (197) / (248) Pages

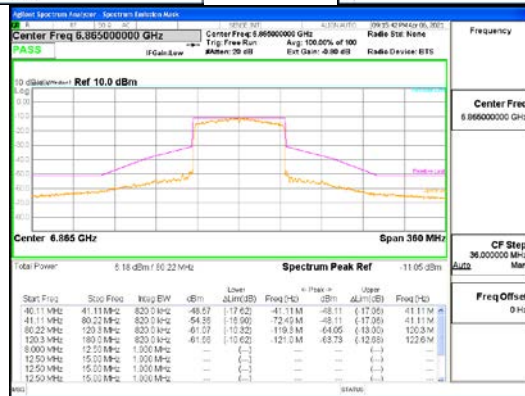

ANT1_802.11ax_HE80_UNI1 7






ANT1_802.11ax_HE80_UNI1 8



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2021-03423
 Page (198) / (248) Pages

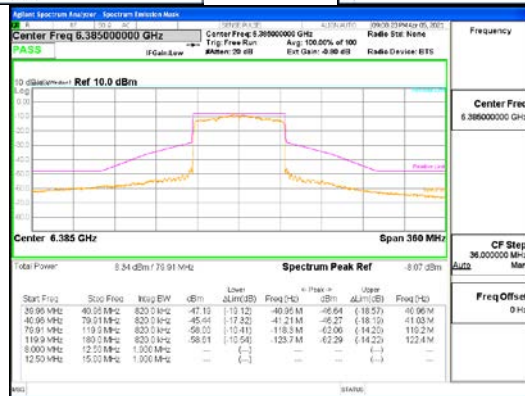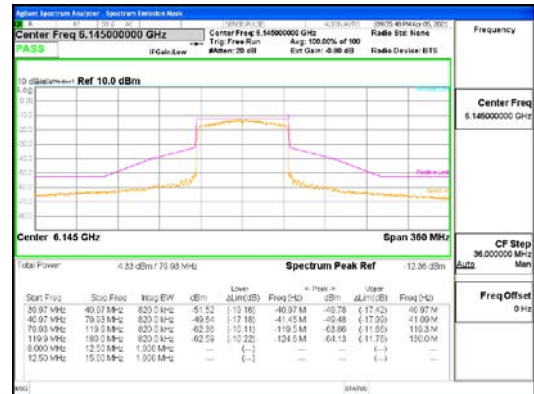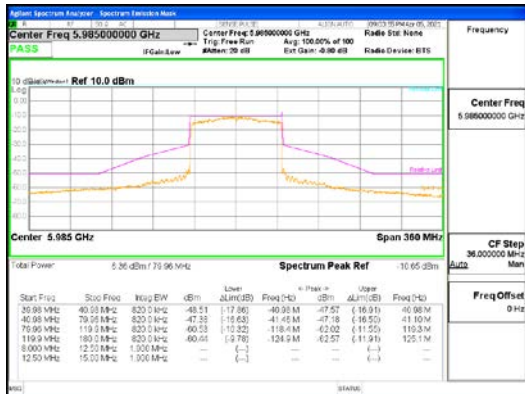

ANT2_802.11ax_HE80_UNI I 5




ANT2_802.11ax_HE80_UNI I 6




CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2021-03423
 Page (199) / (248) Pages

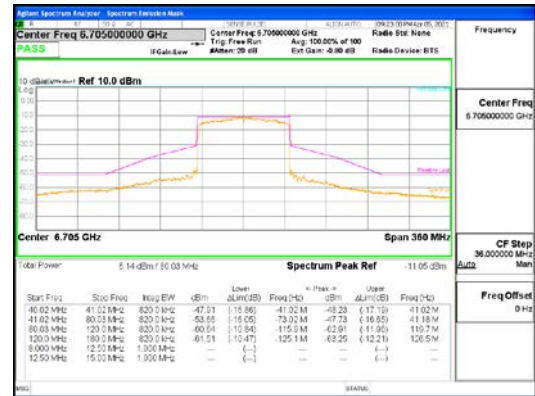

ANT2_802.11ax_HE80_UNI1 7

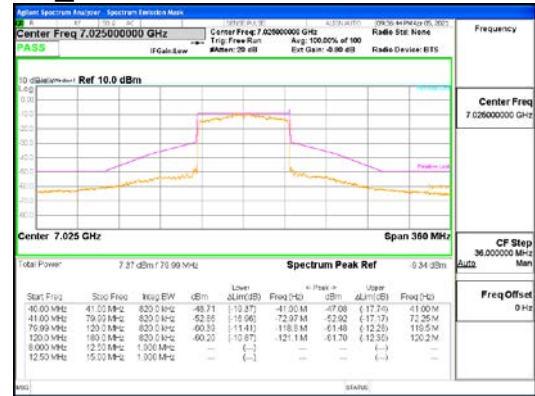

ANT2_802.11ax_HE80_UNI1 8

4.5 Frequency Stability

Test Procedures

KDB 789033 – Section A.3

The EUT was placed inside of an environmental chamber as the temperature in the chamber was varied between -20 °C and +50 °C (Declaration by the Manufacturer). The temperature was incremented by 10 °C intervals and the unit was allowed to stabilize at each temperature before each measurement. The center frequency of the transmitting channel was evaluated at each temperature and the frequency deviation from the channel's center frequency was recorded.

Data for the worst case channel is shown below.

Temperature (°C)	-20	-10	0	10	20	30	40	50
Frequency	Measured Frequency Error (kHz)							
5 955 MHz	10.949	9.169	-4.208	-21.942	-41.937	-60.706	-74.133	-81.922
6 175 MHz	12.283	8.681	-3.535	-27.764	-43.005	-62.603	-76.813	-84.712
6 415 MHz	12.710	8.977	-3.750	-32.239	-44.255	-64.834	-79.431	-87.772
6 435 MHz	12.894	9.609	-3.296	-30.286	-43.947	-64.757	-80.223	-87.988
6 475 MHz	12.974	9.579	-3.338	-30.331	-44.270	-65.055	-80.793	-88.491
6 515 MHz	12.983	9.564	-3.225	-30.260	-44.449	-65.268	-81.221	-88.987
6 535 MHz	13.056	9.585	-3.355	-36.971	-45.054	-65.972	-81.408	-89.268
6 695 MHz	13.411	9.950	-3.807	-37.750	-46.506	-67.753	-83.455	-91.422
6 855 MHz	13.590	9.934	-3.596	-41.903	-47.414	-69.546	-85.379	-93.748
6 875 MHz	13.672	10.169	-3.491	-42.800	-47.457	-69.374	-85.633	-93.812
6 995 MHz	14.039	10.386	-3.710	-38.200	-48.626	-70.499	-87.091	-95.466
7 095 MHz	14.175	10.314	-3.606	-37.312	-49.284	-72.011	-88.428	-96.748
7 115 MHz	14.139	10.149	-3.961	-37.244	-49.274	-72.372	-88.773	-97.075

Note :

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature range as tested.

4.6 Contention Based Protocol

Test Procedures

KDB 987594 – Section I

1. Configure the EUT to transmit with a constant duty cycle.
2. Set the operating parameters of the EUT including power level, operating frequency, modulation and bandwidth.
3. Set the signal analyzer center frequency to the nominal EUT channel center frequency. The span range of the signal analyzer shall be between two times and five times the OBW of the EUT.
Connect the output port of the EUT to the signal analyzer 2, as shown in Figure 2. Ensure that the attenuator 2 provides enough attenuation to not overload the signal analyzer 2 receiver.
4. Monitoring the signal analyzer 2, verify the EUT is operating and transmitting with the parameters set at step two.
5. Using an AWGN signal source, generate (but do not transmit, i.e., RF OFF) a 10 MHz-wide AWGN signal. Use Table 1 to determine the center frequency of the 10 MHz AWGN signal relative to the EUT's channel bandwidth and center frequency.
6. Set the AWGN signal power to an extremely low level (more than 20 dB below the -62 dBm threshold). Connect the AWGN signal source, via a 3-dB splitter, to the signal analyzer 1 and the EUT as shown in Figure 2.
7. Transmit the AWGN signal (RF ON) and verify its characteristics on the signal analyzer 1.
8. Monitor the signal analyzer 2 to verify if the AWGN signal has been detected and the EUT has ceased transmission. If the EUT continues to transmit, then incrementally increase the AWGN signal power level until the EUT stops transmitting.
9. (Including all losses in the RF paths) Determine and record the AWGN signal power level (at the EUT's antenna port) at which the EUT ceased transmission. Repeat the procedure at least 10 times to verify the EUT can detect an AWGN signal with 90% (or better) level of certainty.
10. Refer to Table 1 to determine number of times the detection threshold testing needs to be repeated. If testing is required more than once, then go back to step 5, choose a different center frequency for the AWGN signal and repeat the process.

Limit

Unlicensed low-power indoor devices must detect co-channel radio frequency power that is at least -62 dBm or lower.

Additionally, low-power indoor devices must detect co-channel energy with 90% or greater certainty.



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2021-03423
 Page (202) / (248) Pages

Test Data

Test Mode	Frequency (MHz)	placement of Incumbent Transmission	Incumbent signal Level (dBm)		AWGN Detection Rate(%)	
			Result	Limit	Result	Limit
802.11ax _HE20	5 955 (UNII 5)	Center	-77.40	-62.97	100	90
	6 435 (UNII 6)	Center	-77.79		100	
	6 535 (UNII 7)	Center	-77.97		100	
	6 995 (UNII 8)	Center	-77.04		100	
802.11ax _HE80	5 985 (UNII 5)	Lower edge	-77.42		100	90
		Center	-77.59		100	
		Upper edge	-77.71		100	
	6 465 (UNII 6)	Lower edge	-77.75		100	
		Center	-77.24		100	
		Upper edge	-77.39		100	
	6 705 (UNII 7)	Lower edge	-77.67		100	
		Center	-77.05		100	
		Upper edge	-78.22	100		
	6 945 (UNII 8)	Lower edge	-76.86	100		
		Center	-77.70	100		
		Upper edge	-76.34	100		


See next pages for actual measured spectrum plots.



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2021-03423
 Page (203) / (248) Pages


Incumbent signal Level (20 MHz BW)

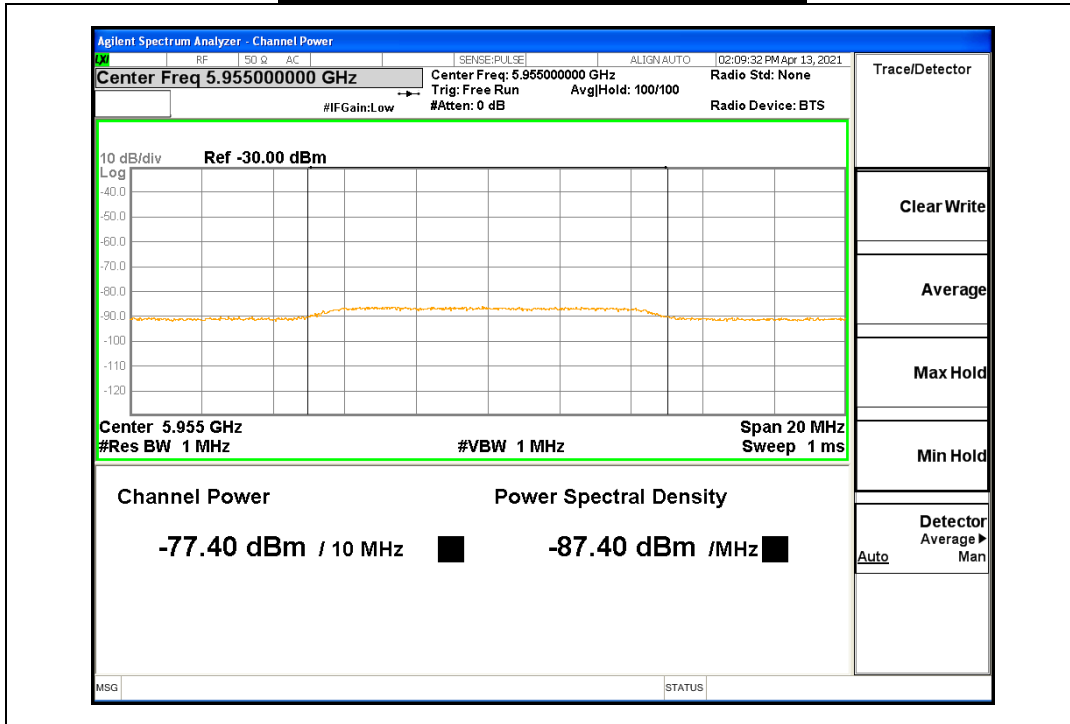


Incumbent signal Level (80 MHz BW)



Monitoring live spectrum (20 MHz BW)

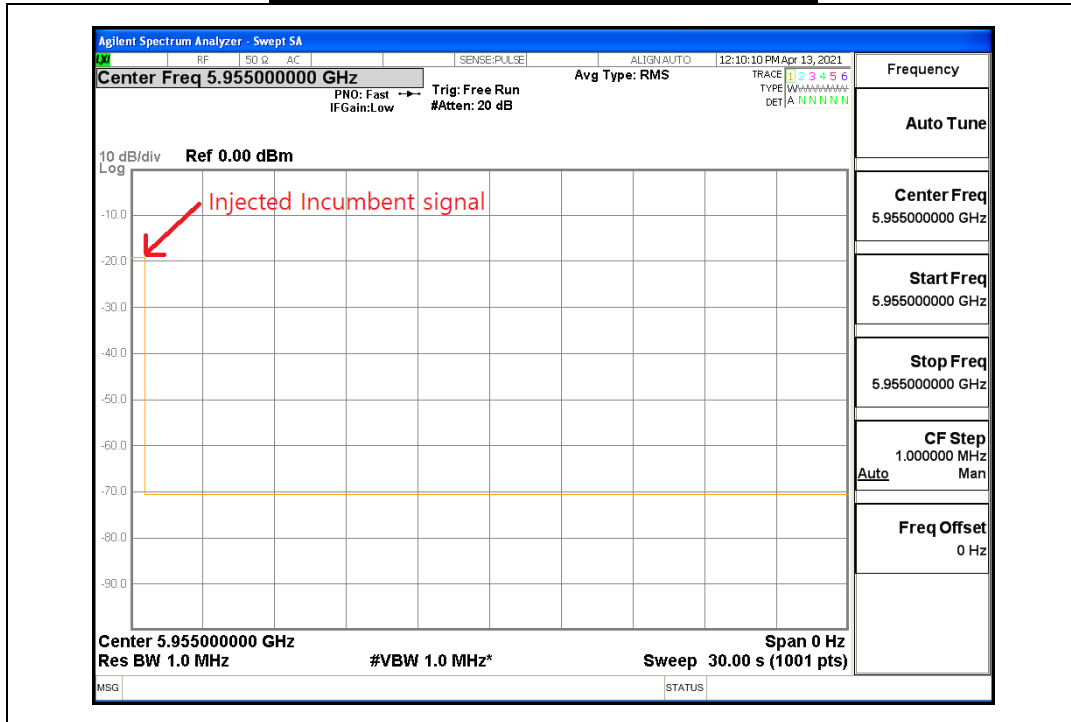

Monitoring live spectrum (80 MHz BW)

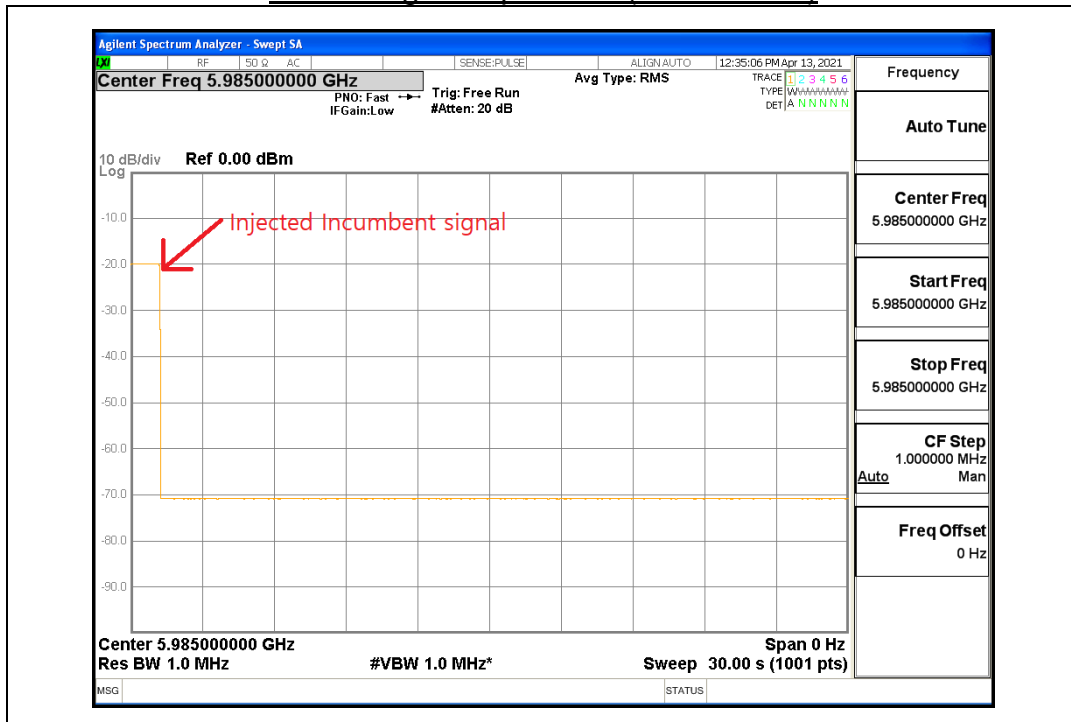

4.7 Unwanted Emissions

Test Location

- 10 m SAC (test distance : 10 m, 3 m)
 3 m SAC (test distance : 3 m)

Test Procedures

KDB 987594 - Section G
KDB 789033 - Section G

- 1) In the frequency range of 9 kHz to 30 MHz, magnetic field is measured with Loop Antenna. The Test Antenna is positioned with its plane vertical at 1m distance from the EUT. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.
- 2) In the frequency range above 30 MHz, Bi-Log Test Antenna(30 MHz to 1 GHz) and Horn Test Antenna(above 1 GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is carried from 1m to 4m above the ground to determine the maximum value of the field strength. The emissions levels at both horizontal and vertical polarizations should be tested.

Test Settings:

Frequency Range = 9 kHz ~ 1 GHz

- a) RBW = 100 kHz for $f < 1$ GHz, 9 kHz for $f < 30$ MHz
b) VBW \geq RBW
c) Detector = CISPR Quasi-peak
d) Sweep time = auto couple

- Peak

Frequency Range = 1 GHz ~ 40 GHz

- a) RBW = 1 MHz
b) VBW $\geq 3 \times$ RBW
c) Detector = Peak
d) Sweep time = auto
e) Trace mode = max hold

- Average (duty cycle $\geq 98\%$)

Frequency Range = 1 GHz ~ 40 GHz

- a) RBW = 1 MHz
b) VBW $\geq 3 \times$ RBW
c) Detector = RMS
d) Sweep time = auto
e) Averaging type = power (i.e., RMS)
f) Trace mode = average (at least 100 traces)



- Average (duty cycle < 98%)

Frequency Range = 1 GHz ~ 40 GHz

a) RBW = 1 MHz

b) VBW ≥ 3 x RBW

c) Detector = RMS

d) Sweep time = auto

e) Averaging type = power (i.e., RMS)

f) Trace mode = average (at least 100 traces)

If power averaging (RMS) mode, then the applicable correction factor is $10 \log(1/x)$, where x is the duty cycle.

Test mode	Duty Cycle Factor (dB)
802.11ax_HE20_SU	0.80
802.11ax_HE40_SU	0.81
802.11ax_HE80_SU	0.87
802.11ax HE20/40/80 26T	0.24

Limit

- 15.209(a)

Frequency(MHz)	Field Strength uV/m@3m	Field Strength dBuV/m@3m	Deasurement Distance (meters)
0.009-0.490	2400/F(kHz)	-	300
0.490-1.705	24000/F(kHz)	-	30
1.705-30	30	-	30
30-88	100**	40	3
88-216	150**	43.5	3
216-960	200**	46	3
Above 960	500	54	3

** Except as provided in 15.209(g).fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72MHz, 76-88MHz, 174-216MHz, 470-806MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g.15.231 and 15.241.


- 15.407, KDB 987594

E.I.R.P -27 dBm/MHz


$E[\text{dBuV/m}] = \text{EIRP}[\text{dBm}] + 95.2$, for $d = 3\text{m}$

Test Setup:


- 1) For field strength of emissions from 9 kHz to 30 MHz

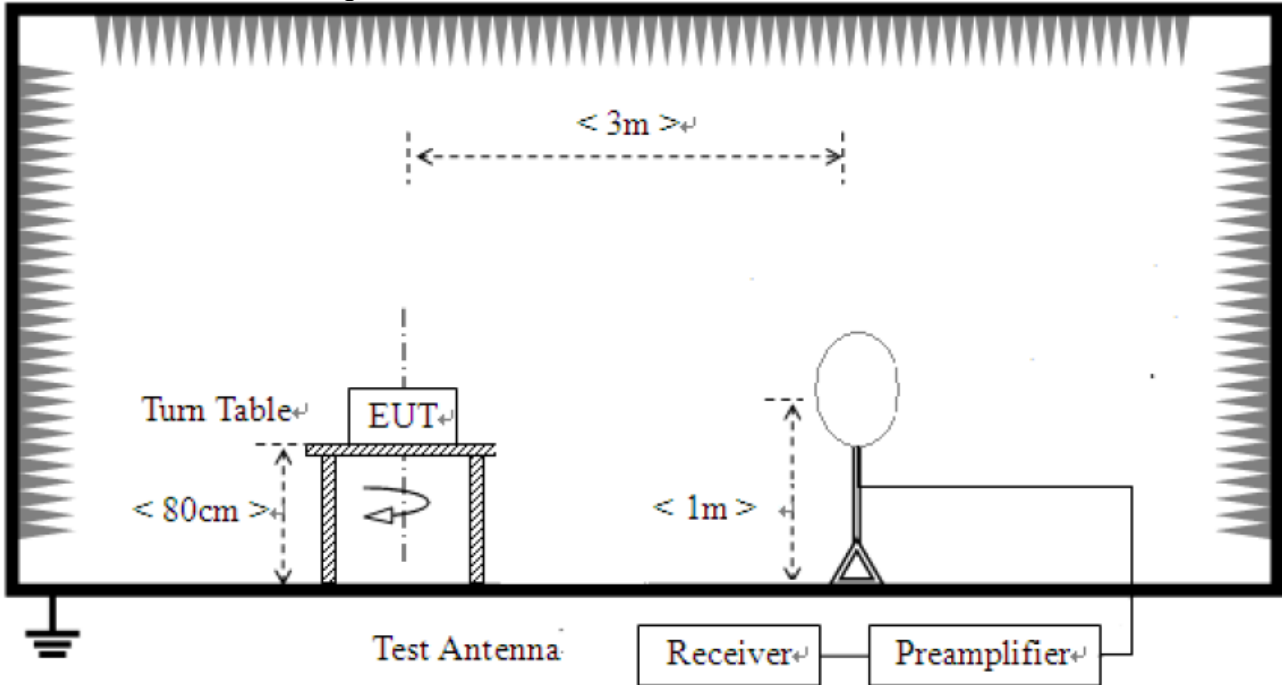

- 2) For field strength of emissions from 30 MHz to 1 GHz

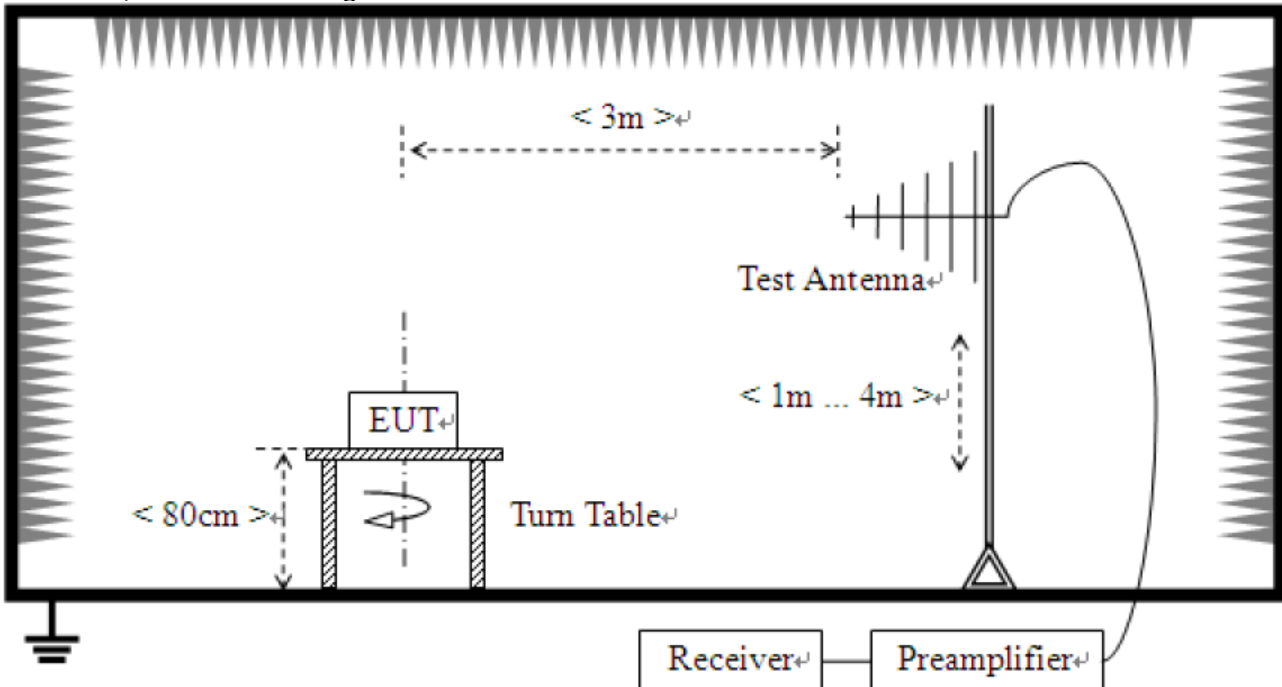

3) For field strength of emissions above 1 GHz

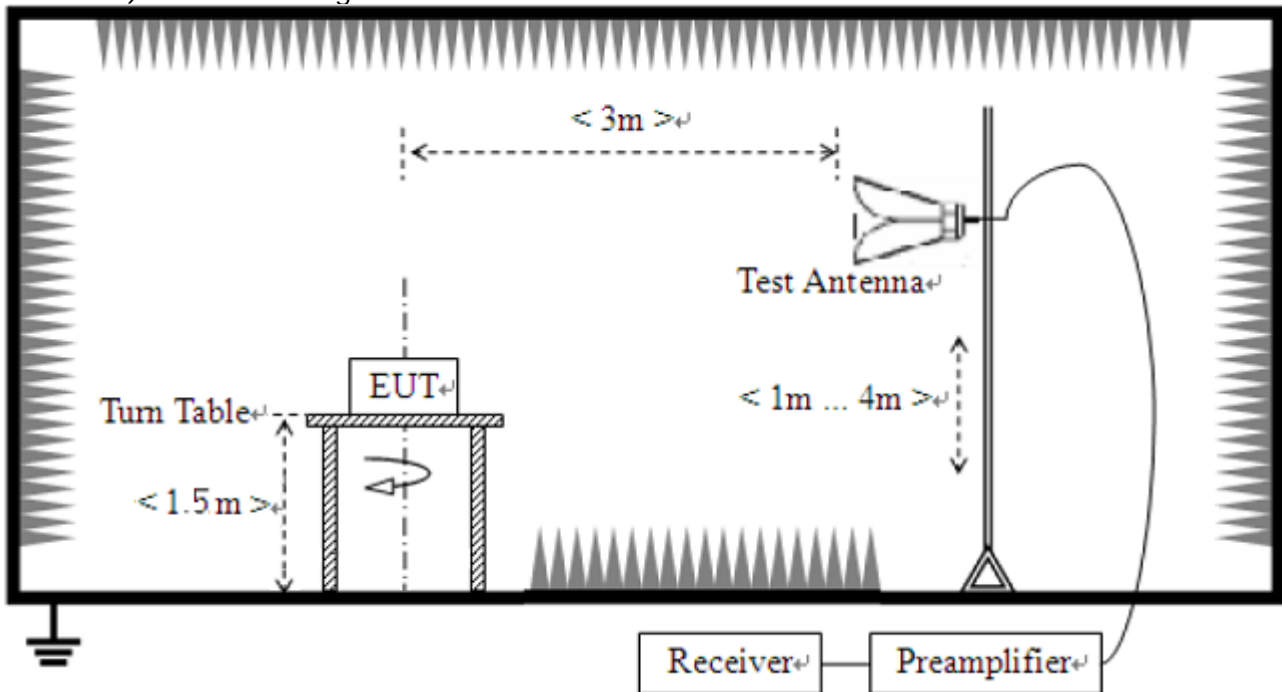

Test Mode

We have done all test mode.

The worst case antenna configuration and Test mode are determined to be as follows.

802.11ax : ANT1 + ANT2 (MIMO)

So the results are only attached worst cases.



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2021-03423
 Page (209) / (248) Pages

802.11ax Test RU Index for Tones

Mode	Bandwidth (MHz)	Frequency (MHz)	Tones	Test RU Index	
				Band Edge	Spurious Emission
802.11ax	20	5 955	26T	0	-
				-	4
		SU	61	61	
			-	-	
		6 175	26T	-	-
				-	4
		SU	-	61	
			-	-	
		6 415	26T	-	-
				-	4
		SU	-	61	
			-	-	
		6 435	26T	-	-
				-	4
		SU	-	61	
			-	-	
		6 475	26T	-	-
				-	4
		SU	-	61	
			-	-	
		6 515	26T	-	-
				-	4
		SU	-	61	
			-	-	
		6 535	26T	-	-
				-	4
		SU	-	61	
			-	-	
		6 695	26T	-	-
				-	4
		SU	-	61	
			-	-	
		6 855	26T	-	-
				-	4
		SU	-	61	
			-	-	
		6 875	26T	-	-
				-	4
		SU	-	61	
			-	-	
		6 995	26T	-	-
				-	4
		SU	-	61	
			-	-	
		7 095	26T	-	-
				-	4
				8	-
		SU	61	61	



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2021-03423
 Page (210) / (248) Pages

		7 115	26T	-	-
				-	4
				8	-
			SU	61	61

Mode	Bandwidth (MHz)	Frequency (MHz)	Tones	Test RU Index	
				Band Edge	Spurious Emission
802.11ax	40	5 965	26T	0	-
				-	9
			-	-	
			SU	65	65
		6 165	26T	-	-
				-	9
			-	-	
			SU	-	65
		6 405	26T	-	-
				-	9
			-	-	
			SU	-	65
		6 445	26T	-	-
				-	9
			-	-	
			SU	-	65
		6 485	26T	-	-
				-	9
			-	-	
			SU	-	65
		6 525	26T	-	-
				-	9
			-	-	
			SU	-	65
		6 685	26T	-	-
				-	9
			-	-	
			SU	-	65
		6 845	26T	-	-
				-	9
			-	-	
			SU	-	65
		6 885	26T	-	-
				-	9
			-	-	
			SU	-	65
7 005	26T	-	-		
		-	9		
	-	-			
	SU	-	65		
7 085	26T	-	-		
		-	9		
		17	-		
	SU	65	65		



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2021-03423
 Page (211) / (248) Pages

Mode	Bandwidth (MHz)	Frequency (MHz)	Tones	Test RU Index	
				Band Edge	Spurious Emission
802.11ax	80	5 985	26T	0	-
				-	18
		SU	67	67	
			-	-	
		6 145	26T	-	-
				-	18
		SU	-	67	
			-	-	
		6 385	26T	-	-
				-	18
		SU	-	67	
			-	-	
		6 465	26T	-	-
				-	18
		SU	-	67	
			-	-	
		6 545	26T	-	-
				-	18
		SU	-	67	
			-	-	
		6 705	26T	-	-
				-	18
		SU	-	67	
			-	-	
6 865	26T	-	-		
		-	18		
SU	-	67			
	-	-			
6 945	26T	-	-		
		-	18		
SU	-	67			
	-	-			
7 025	26T	-	-		
		-	18		
SU	36	-			
	67	67			

Test Results


1) 9 kHz to 30 MHz

Test mode : Transmitter (Worst Case)

The requirements are:

Complies

Test Data

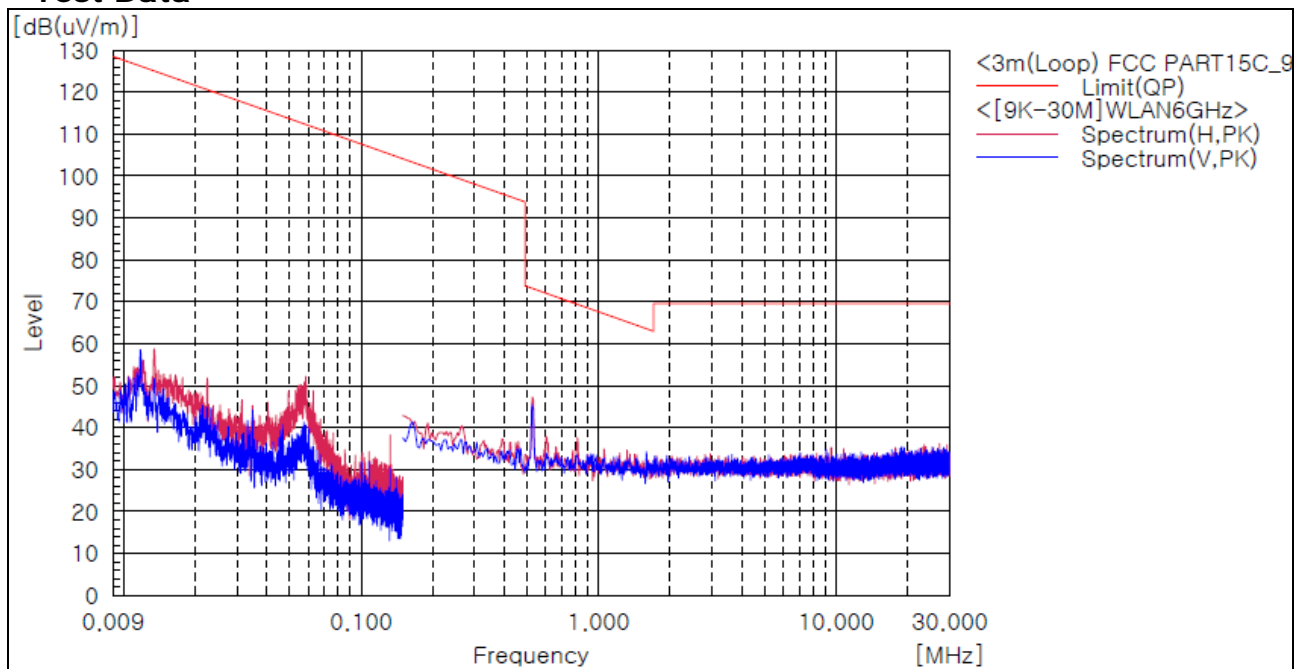

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Level [dB(uV/m)]	Limit [dB(uV/m)]	Margin [dB]
-----------------	-----	----------------	---------------	------------------	------------------	-------------

The emissions 9 kHz to 30 MHz were 20 dB lower than the limit.

Remark :


1. The unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in lie-down position(X axis) and the worst case was recorded.
2. Result = Reading + c.f(Correction factor)
3. Correction factor = Antenna factor + Cable loss + 6 dB attenuator - Amp Gain
4. This data is the Peak(PK) value.

Test mode : Transmitter (simultaneous transmissions BDR+ WLAN 6E)

The requirements are:

Complies

Test Data

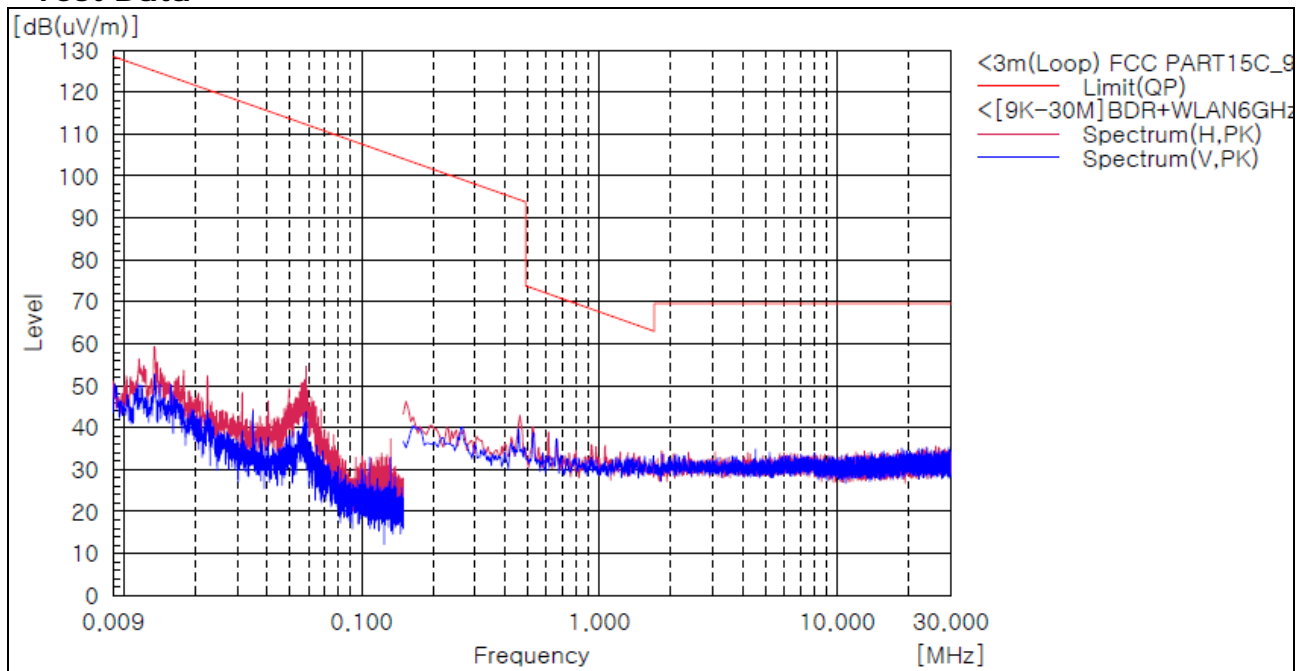

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Level [dB(uV/m)]	Limit [dB(uV/m)]	Margin [dB]
-----------------	-----	----------------	---------------	------------------	------------------	-------------

The emissions 9 kHz to 30 MHz were 20 dB lower than the limit.

Remark :

1. The unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in lie-down position(X axis) and the worst case was recorded.
2. Result = Reading + c.f(Correction factor)
3. Correction factor = Antenna factor + Cable loss + 6 dB attenuator - Amp Gain
4. This data is the Peak(PK) value.


2) 30 MHz to 1 GHz

Test mode : Transmitter (Worst Case)

The requirements are:

Complies

Test Data

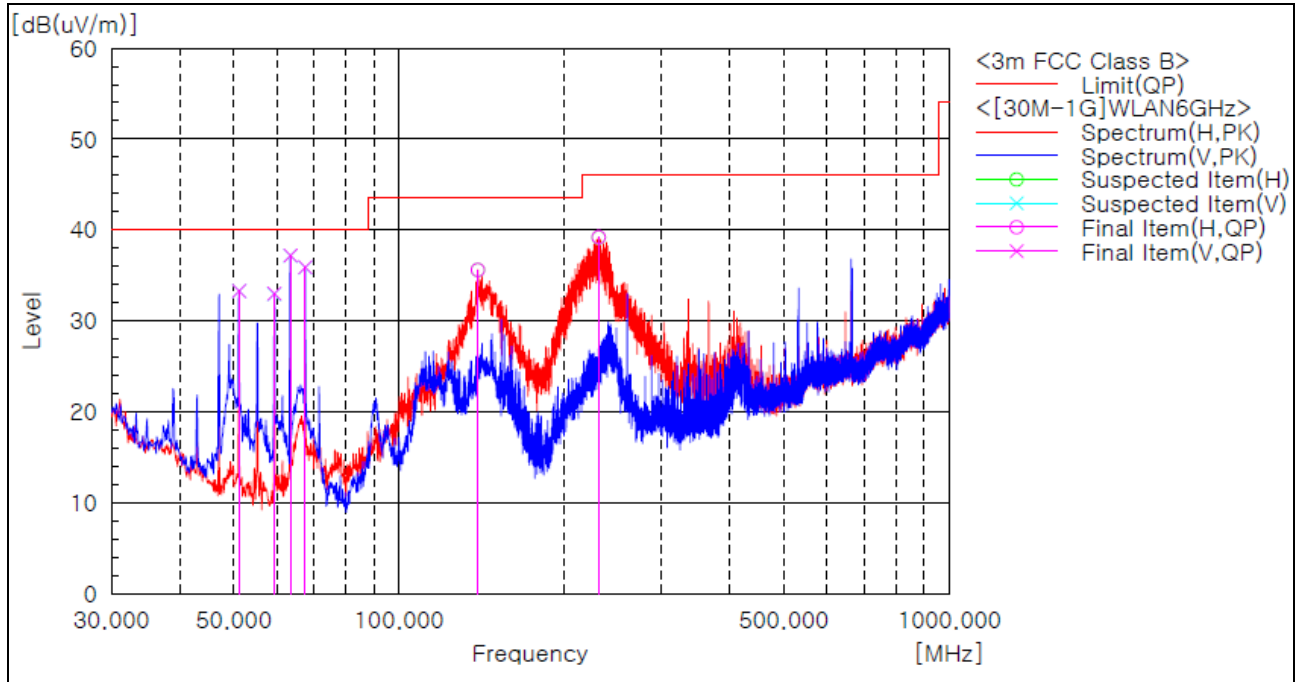

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]
1	51.219	V	49.6	-16.3	33.3	40.0	6.7	101.0	94.0
2	59.343	V	51.6	-18.6	33.0	40.0	7.0	101.0	21.0
3	63.465	V	55.4	-18.2	37.2	40.0	2.8	101.0	1.0
4	67.588	V	53.7	-17.8	35.9	40.0	4.1	101.0	1.0
5	139.125	H	47.3	-11.7	35.6	43.5	7.9	207.0	1.0
6	230.790	H	51.5	-12.3	39.2	46.0	6.8	101.0	143.0

Remark :


1. The unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in lie-down position(X axis) and the worst case was recorded.
2. Result = Reading + c.f(Correction factor)
3. Correction factor = Antenna factor + Cable loss + 6 dB attenuator - Amp Gain

Test mode : Transmitter (simultaneous transmissions BDR + WLAN 6E)

The requirements are:

Complies

Test Data

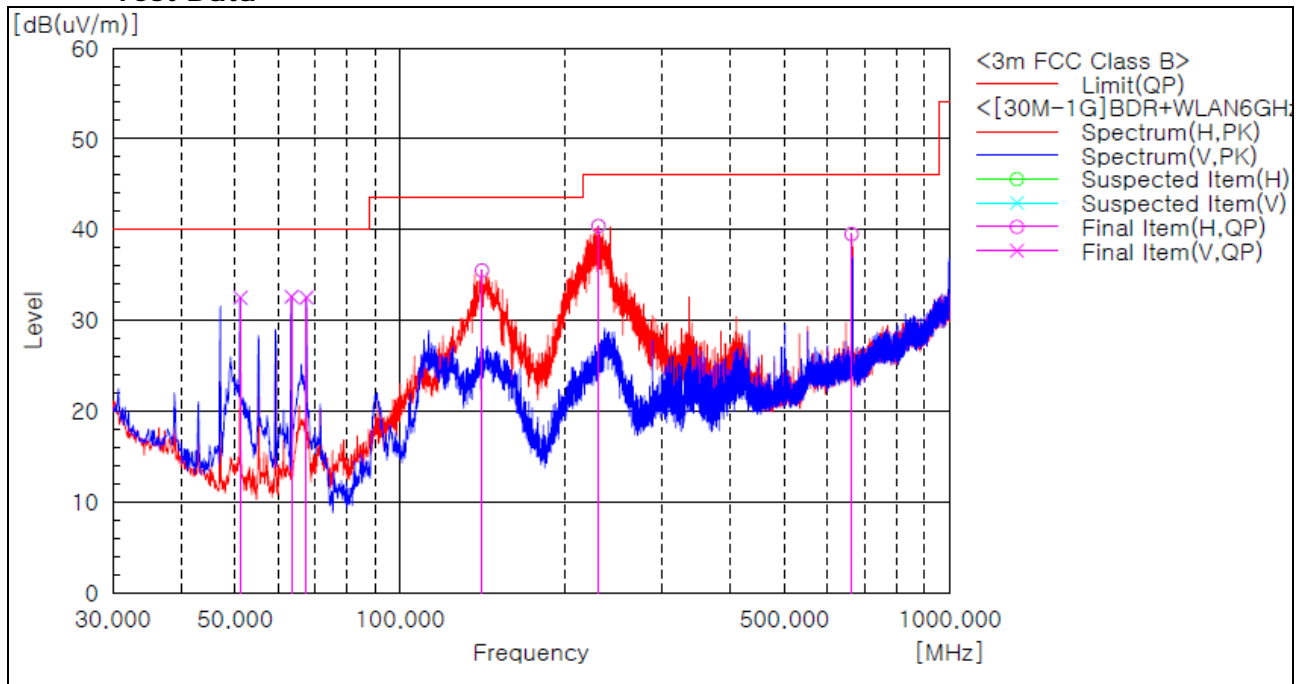

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]
1	51.219	V	48.8	-16.3	32.5	40.0	7.5	101.0	58.0
2	63.465	V	50.8	-18.2	32.6	40.0	7.4	101.0	1.0
3	67.588	V	50.3	-17.8	32.5	40.0	7.5	101.0	1.0
4	141.065	H	47.2	-11.7	35.5	43.5	8.0	205.0	1.0
5	229.699	H	52.8	-12.4	40.4	46.0	5.6	101.0	146.0
6	663.774	H	38.7	0.8	39.5	46.0	6.5	101.0	43.0

Remark :



1. The unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in lie-down position(X axis) and the worst case was recorded.
2. Result = Reading + c.f(Correction factor)
3. Correction factor = Antenna factor + Cable loss + 6 dB attenuator - Amp Gain

3) above 1 GHz

The requirements are:

Complies

Test Data

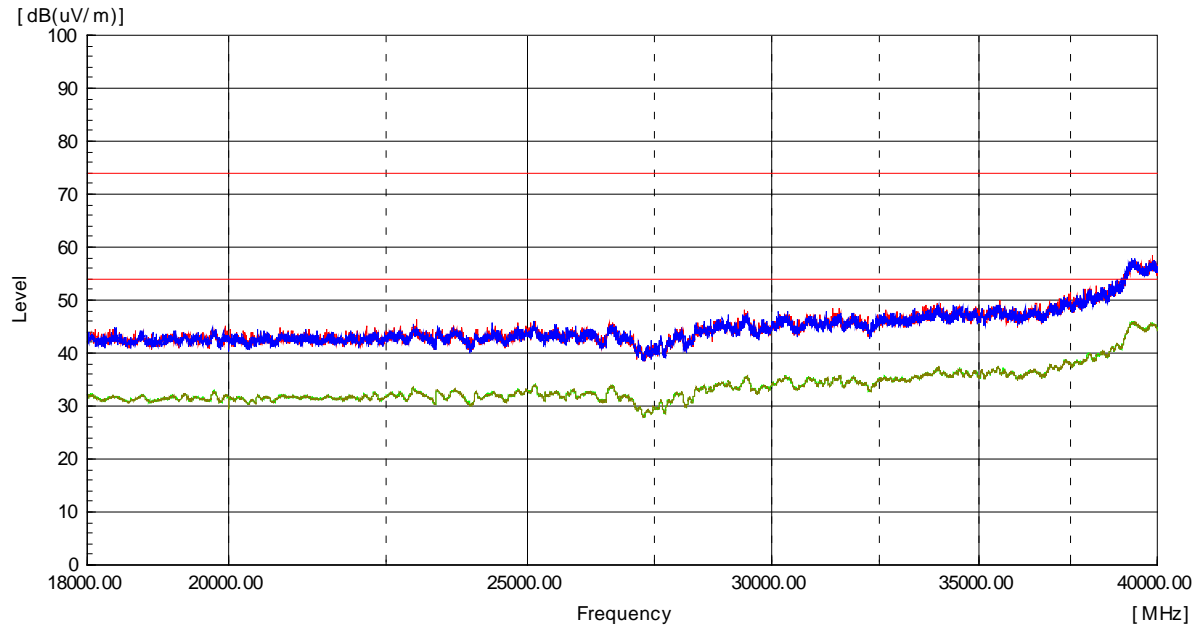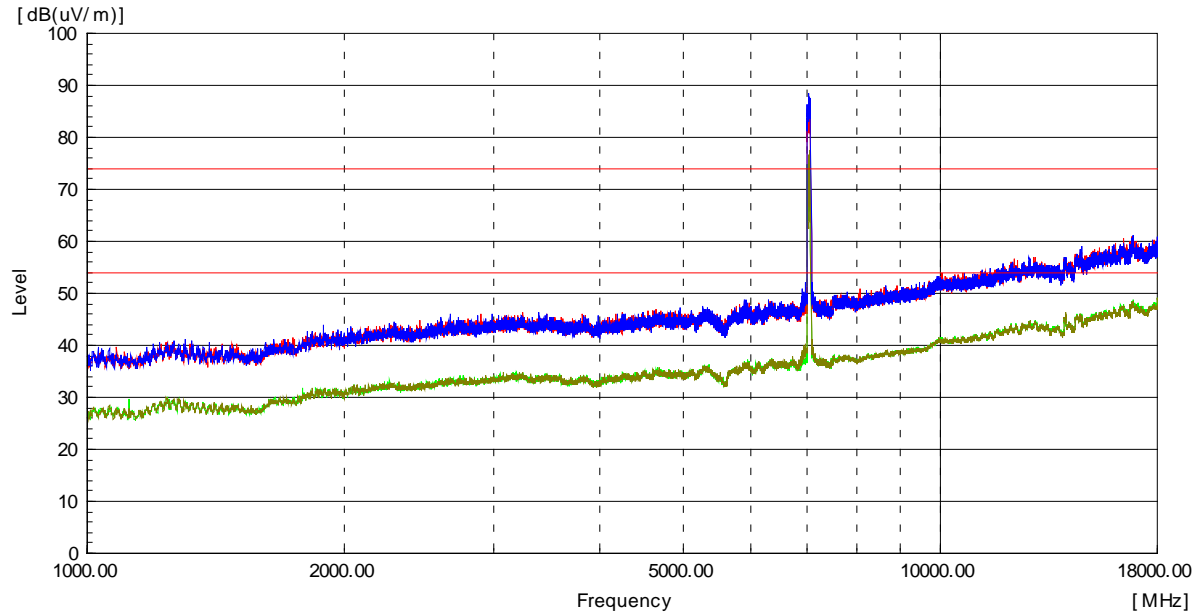



Test mode : Transmitter, 802.11ax_HE20_SU

The requirements are:

Complies

Test Data

Ch.1(5 955 MHz)

Frequency [MHz]	(P)	Reading PK [dBuV]	Reading AV [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]
-----------------	-----	-------------------	-------------------	---------------	------------------------	---------------------	---------------------	---------------------	---------------------	----------------	----------------

The emissions above 1 GHz were 20 dB lower than the limit.

Ch.45(6 175 MHz)

Frequency [MHz]	(P)	Reading PK [dBuV]	Reading AV [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]
-----------------	-----	-------------------	-------------------	---------------	------------------------	---------------------	---------------------	---------------------	---------------------	----------------	----------------

The emissions above 1 GHz were 20 dB lower than the limit.

Ch.93(6 415 MHz)

Frequency [MHz]	(P)	Reading PK [dBuV]	Reading AV [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]
-----------------	-----	-------------------	-------------------	---------------	------------------------	---------------------	---------------------	---------------------	---------------------	----------------	----------------

The emissions above 1 GHz were 20 dB lower than the limit.

Ch.97(6 435 MHz)

Frequency [MHz]	(P)	Reading PK [dBuV]	Reading AV [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]
-----------------	-----	-------------------	-------------------	---------------	------------------------	---------------------	---------------------	---------------------	---------------------	----------------	----------------

The emissions above 1 GHz were 20 dB lower than the limit.

Ch.105(6 475 MHz)

Frequency [MHz]	(P)	Reading PK [dBuV]	Reading AV [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]
-----------------	-----	-------------------	-------------------	---------------	------------------------	---------------------	---------------------	---------------------	---------------------	----------------	----------------

The emissions above 1 GHz were 20 dB lower than the limit.

Ch.113(6 515 MHz)

Frequency [MHz]	(P)	Reading PK [dBuV]	Reading AV [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]
-----------------	-----	-------------------	-------------------	---------------	------------------------	---------------------	---------------------	---------------------	---------------------	----------------	----------------

The emissions above 1 GHz were 20 dB lower than the limit.



Ch.117(6 535 MHz)

Frequency [MHz]	(P)	Reading PK [dBuV]	Reading AV [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]
-----------------	-----	-------------------	-------------------	---------------	------------------------	---------------------	---------------------	---------------------	---------------------	----------------	----------------

The emissions above 1 GHz were 20 dB lower than the limit.

Ch.149(6 695 MHz)

Frequency [MHz]	(P)	Reading PK [dBuV]	Reading AV [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]
-----------------	-----	-------------------	-------------------	---------------	------------------------	---------------------	---------------------	---------------------	---------------------	----------------	----------------

The emissions above 1 GHz were 20 dB lower than the limit.

Ch.181(6 855 MHz)

Frequency [MHz]	(P)	Reading PK [dBuV]	Reading AV [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]
-----------------	-----	-------------------	-------------------	---------------	------------------------	---------------------	---------------------	---------------------	---------------------	----------------	----------------

The emissions above 1 GHz were 20 dB lower than the limit.

Ch.185(6 875 MHz)

Frequency [MHz]	(P)	Reading PK [dBuV]	Reading AV [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]
-----------------	-----	-------------------	-------------------	---------------	------------------------	---------------------	---------------------	---------------------	---------------------	----------------	----------------

The emissions above 1 GHz were 20 dB lower than the limit.

Ch.209(6 995 MHz)

Frequency [MHz]	(P)	Reading PK [dBuV]	Reading AV [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]
14 008.02	H	45.9	-----	11.4	-----	57.3	-----	74.0	-----	16.7	-----
14 002.66	H	-----	33.9	11.4	0.8	-----	46.1	-----	54.0	-----	7.9
13 996.42	V	46.0	-----	11.4	-----	57.4	-----	74.0	-----	16.6	-----
13 987.79	V	-----	35.3	11.4	0.8	-----	47.5	-----	54.0	-----	6.5

Ch.229(7 095 MHz)

Frequency [MHz]	(P)	Reading PK [dBuV]	Reading AV [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]
14 193.96	H	45.7	-----	11.5	-----	57.2	-----	74.0	-----	16.8	-----
14 186.52	H	-----	33.8	11.4	0.8	-----	46.0	-----	54.0	-----	8.0
14 179.08	V	47.1	-----	11.4	-----	58.5	-----	74.0	-----	15.5	-----
14 193.66	V	-----	35.9	11.5	0.8	-----	48.2	-----	54.0	-----	5.8



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2021-03423
 Page (219) / (248) Pages

Ch.233(7 115 MHz)

Frequency [MHz]	(P)	Reading PK [dBuV]	Reading AV [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]
-----------------	-----	-------------------	-------------------	---------------	------------------------	---------------------	---------------------	---------------------	---------------------	----------------	----------------

The emissions above 1 GHz were 20 dB lower than the limit.

Remarks


1. The unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down positon(X,Y axis). The worst emission was found in lie-down positon(X axis) and the worst case was recorded.
2. Peak Result = Reading + c.f(Correction factor)
 Average Result = Reading + c.f(Correction factor) + Duty Cycle Factor
3. Correction factor = Antenna factor + Cable loss - Amp Gain



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2021-03423
 Page (220) / (248) Pages

Worst Case Mode :	802.11ax_HE20_SU
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 955 MHz
Channel :	1

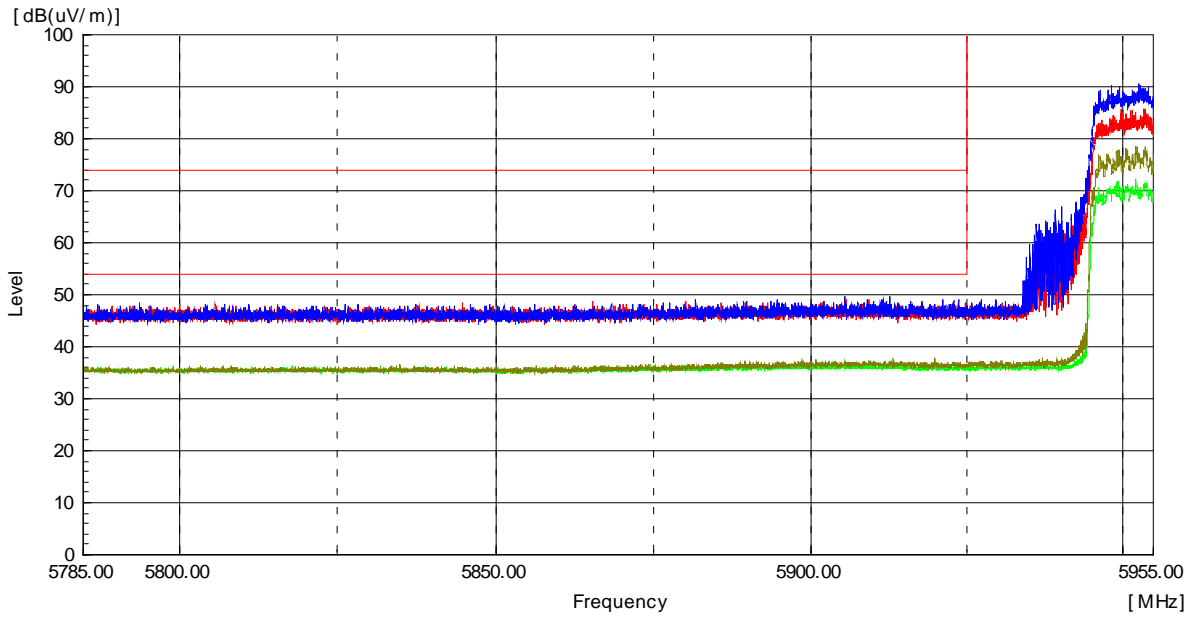


Frequency [MHz]	(P)	Reading PK [dBuV]	Reading AV [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]
-----------------	-----	-------------------	-------------------	---------------	------------------------	---------------------	---------------------	---------------------	---------------------	----------------	----------------

The emissions above 1 GHz were 20 dB lower than the limit.

Radiated Restricted Band Edge Plot

Worst Case Mode :	802.11ax_HE20_SU
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	7 095 MHz
Channel :	229

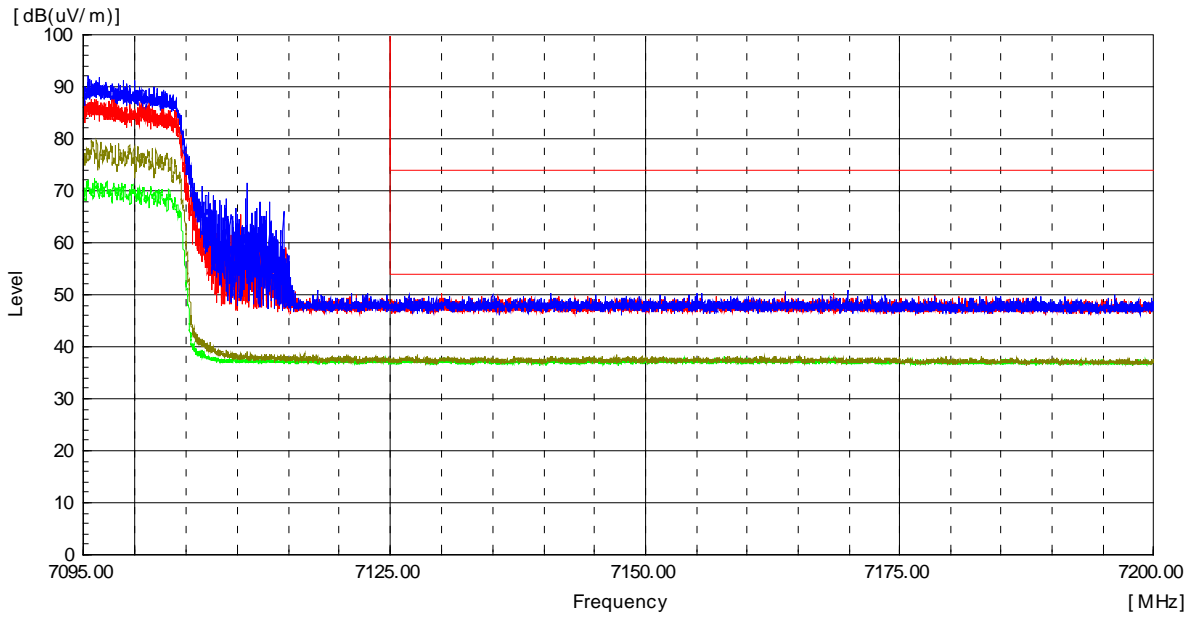


Frequency [MHz]	(P)	Reading PK [dBuV]	Reading AV [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]
-----------------	-----	-------------------	-------------------	---------------	------------------------	---------------------	---------------------	---------------------	---------------------	----------------	----------------

The emissions above 1 GHz were 20 dB lower than the limit.

Radiated Restricted Band Edge Plot

Worst Case Mode :	802.11ax_HE20_SU
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	7 115 MHz
Channel :	233

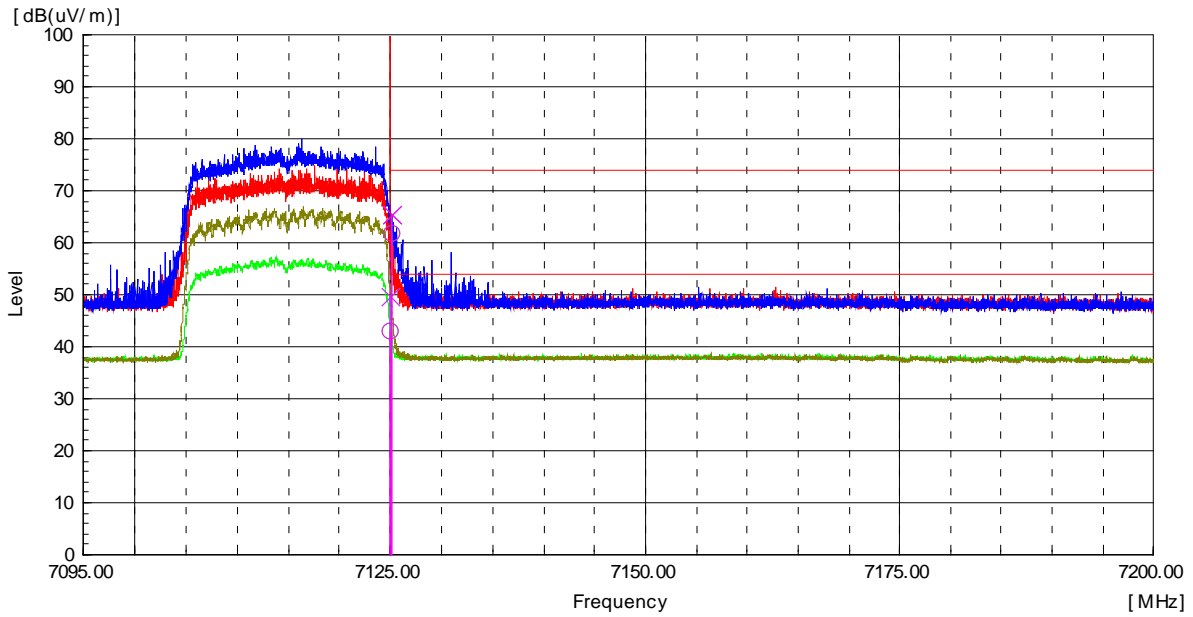

Frequency [MHz]	(P)	Reading PK [dBuV]	Reading AV [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]
7 125.14	H	52.3	-----	4.3	-----	56.6	-----	74.0	-----	17.4	-----
7 125.00	H	-----	37.1	4.3	0.8	-----	42.2	-----	54.0	-----	11.8
7 125.00	V	59.4	-----	4.3	-----	63.7	-----	74.0	-----	10.3	-----
7 125.02	V	-----	42.2	4.3	0.8	-----	47.3	-----	54.0	-----	6.7
7 125.00	V	59.4	-----	4.3		63.7	-----	68.2	-----	4.5	-----

Radiated Restricted Band Edge Plot



Test mode : Transmitter, 802.11ax_HE40_SU

The requirements are:

Complies

Test Data

Ch.3(5 965 MHz)

Frequency [MHz]	(P)	Reading PK [dBuV]	Reading AV [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]
-----------------	-----	-------------------	-------------------	---------------	------------------------	---------------------	---------------------	---------------------	---------------------	----------------	----------------

The emissions above 1 GHz were 20 dB lower than the limit.

Ch.43(6 165 MHz)

Frequency [MHz]	(P)	Reading PK [dBuV]	Reading AV [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]
-----------------	-----	-------------------	-------------------	---------------	------------------------	---------------------	---------------------	---------------------	---------------------	----------------	----------------

The emissions above 1 GHz were 20 dB lower than the limit.

Ch.91(6 405 MHz)

Frequency [MHz]	(P)	Reading PK [dBuV]	Reading AV [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]
-----------------	-----	-------------------	-------------------	---------------	------------------------	---------------------	---------------------	---------------------	---------------------	----------------	----------------

The emissions above 1 GHz were 20 dB lower than the limit.

Ch.99(6 445 MHz)

Frequency [MHz]	(P)	Reading PK [dBuV]	Reading AV [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]
-----------------	-----	-------------------	-------------------	---------------	------------------------	---------------------	---------------------	---------------------	---------------------	----------------	----------------

The emissions above 1 GHz were 20 dB lower than the limit.

Ch.107(6 485 MHz)

Frequency [MHz]	(P)	Reading PK [dBuV]	Reading AV [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]
-----------------	-----	-------------------	-------------------	---------------	------------------------	---------------------	---------------------	---------------------	---------------------	----------------	----------------

The emissions above 1 GHz were 20 dB lower than the limit.

Ch.115(6 525 MHz)

Frequency [MHz]	(P)	Reading PK [dBuV]	Reading AV [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]
-----------------	-----	-------------------	-------------------	---------------	------------------------	---------------------	---------------------	---------------------	---------------------	----------------	----------------

The emissions above 1 GHz were 20 dB lower than the limit.



Ch.147(6 685 MHz)

Frequency [MHz]	(P)	Reading PK [dBuV]	Reading AV [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]
-----------------	-----	-------------------	-------------------	---------------	------------------------	---------------------	---------------------	---------------------	---------------------	----------------	----------------

The emissions above 1 GHz were 20 dB lower than the limit.

Ch.179(6 845 MHz)

Frequency [MHz]	(P)	Reading PK [dBuV]	Reading AV [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]
-----------------	-----	-------------------	-------------------	---------------	------------------------	---------------------	---------------------	---------------------	---------------------	----------------	----------------

The emissions above 1 GHz were 20 dB lower than the limit.

Ch.187(6 885 MHz)

Frequency [MHz]	(P)	Reading PK [dBuV]	Reading AV [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]
-----------------	-----	-------------------	-------------------	---------------	------------------------	---------------------	---------------------	---------------------	---------------------	----------------	----------------

The emissions above 1 GHz were 20 dB lower than the limit.

Ch.211(7 005 MHz)

Frequency [MHz]	(P)	Reading PK [dBuV]	Reading AV [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]
-----------------	-----	-------------------	-------------------	---------------	------------------------	---------------------	---------------------	---------------------	---------------------	----------------	----------------

The emissions above 1 GHz were 20 dB lower than the limit.

Ch.227(7 085 MHz)

Frequency [MHz]	(P)	Reading PK [dBuV]	Reading AV [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]
14 195.74	H	44.0	-----	11.5	-----	55.5	-----	74.0	-----	18.5	-----
14 177.59	H	-----	31.9	11.4	0.8	-----	44.1	-----	54.0	-----	9.9
14 179.97	V	44.5	-----	11.4	-----	55.9	-----	74.0	-----	18.1	-----
14 176.70	V	-----	33.0	11.4	0.8	-----	45.2	-----	54.0	-----	8.8

Remarks


1. The unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in lie-down position(X axis) and the worst case was recorded.
2. Peak Result = Reading + c.f(Correction factor)
 Average Result = Reading + c.f(Correction factor) + Duty Cycle Factor
3. Correction factor = Antenna factor + Cable loss - Amp Gain



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2021-03423
 Page (225) / (248) Pages

Worst Case Mode :	802.11ax_HE40_SU
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 965 MHz
Channel :	3

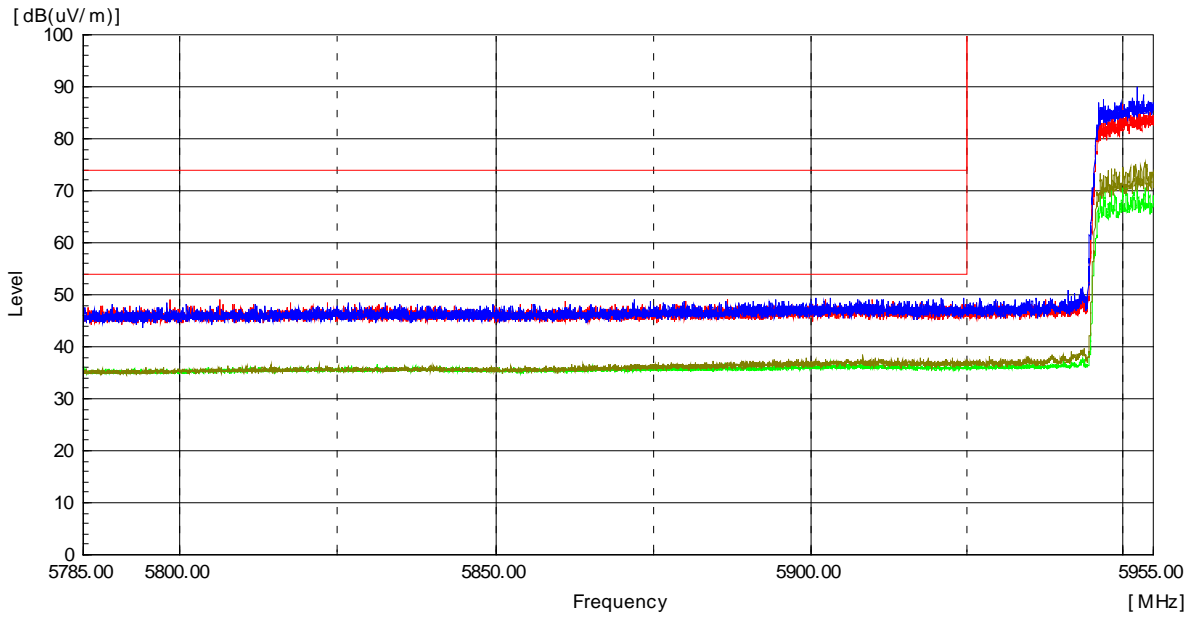

Frequency [MHz]	(P)	Reading PK [dBuV]	Reading AV [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]
-----------------	-----	-------------------	-------------------	---------------	------------------------	---------------------	---------------------	---------------------	---------------------	----------------	----------------

The emissions above 1 GHz were 20 dB lower than the limit.


Radiated Restricted Band Edge Plot



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2021-03423
 Page (226) / (248) Pages

Worst Case Mode :	802.11ax_HE40_SU
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	7 085 MHz
Channel :	227

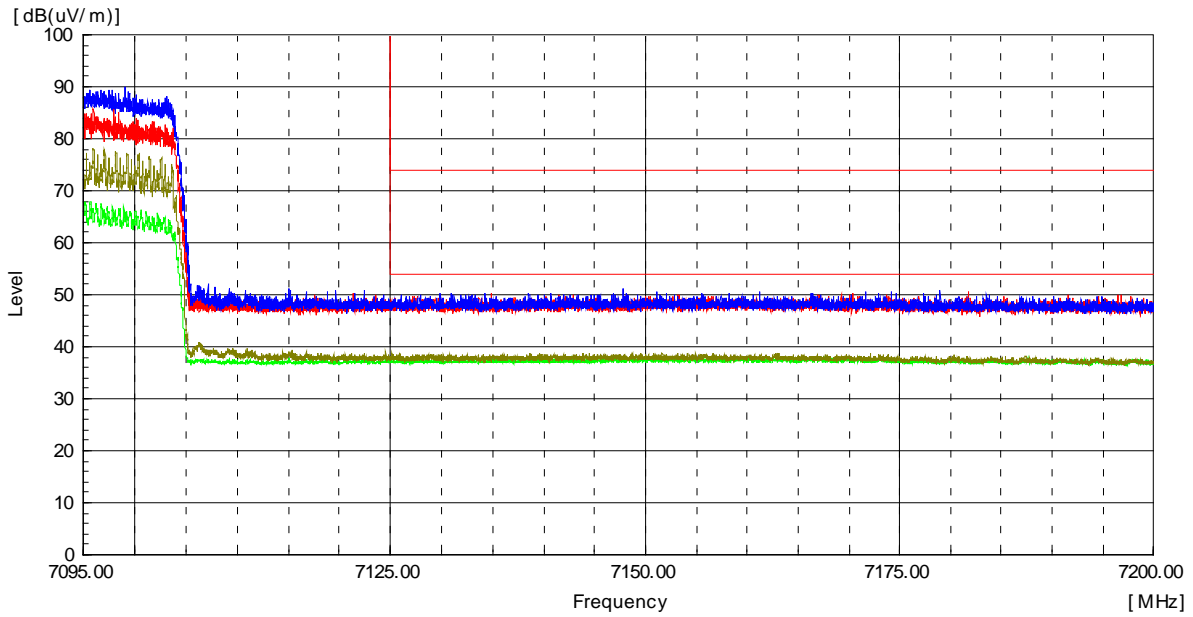

Frequency [MHz]	(P)	Reading PK [dBuV]	Reading AV [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]
-----------------	-----	-------------------	-------------------	---------------	------------------------	---------------------	---------------------	---------------------	---------------------	----------------	----------------

The emissions above 1 GHz were 20 dB lower than the limit.

Radiated Restricted Band Edge Plot



Test mode : Transmitter, 802.11ax_HE80_SU

The requirements are:

Complies

Test Data

Ch.7(5 985 MHz)

Frequency [MHz]	(P)	Reading PK [dBuV]	Reading AV [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]
11 966.57	H	47.7	-----	8.6	-----	56.3	-----	74.0	-----	17.7	-----
11 969.55	H	-----	35.8	8.6	0.9	-----	45.3	-----	54.0	-----	8.7
11 969.84	V	46.7	-----	8.6	-----	55.3	-----	74.0	-----	18.7	-----
11 969.84	V	-----	35.0	8.6	0.9	-----	44.5	-----	54.0	-----	9.5

Ch.39(6 145 MHz)

Frequency [MHz]	(P)	Reading PK [dBuV]	Reading AV [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]
The emissions above 1 GHz were 20 dB lower than the limit.											

Ch.87(6 385 MHz)

Frequency [MHz]	(P)	Reading PK [dBuV]	Reading AV [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]
The emissions above 1 GHz were 20 dB lower than the limit.											

Ch.103(6 465 MHz)

Frequency [MHz]	(P)	Reading PK [dBuV]	Reading AV [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]
The emissions above 1 GHz were 20 dB lower than the limit.											

Ch.119(6 545 MHz)

Frequency [MHz]	(P)	Reading PK [dBuV]	Reading AV [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]
The emissions above 1 GHz were 20 dB lower than the limit.											

Ch.151(6 705 MHz)

Frequency [MHz]	(P)	Reading PK [dBuV]	Reading AV [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]
The emissions above 1 GHz were 20 dB lower than the limit.											



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2021-03423
 Page (228) / (248) Pages

Ch.183(6 865 MHz)

Frequency [MHz]	(P)	Reading PK [dBuV]	Reading AV [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]
-----------------	-----	-------------------	-------------------	---------------	------------------------	---------------------	---------------------	---------------------	---------------------	----------------	----------------

The emissions above 1 GHz were 20 dB lower than the limit.

Ch.199(6 945 MHz)

Frequency [MHz]	(P)	Reading PK [dBuV]	Reading AV [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]
13 910.82	H	46.0	-----	11.9	-----	57.9	-----	74.0	-----	16.1	-----
13 902.00	H	-----	34.0	11.9	0.9	-----	46.8	-----	54.0	-----	7.2
13 910.82	V	46.7	-----	11.9	-----	58.6	-----	74.0	-----	15.4	-----
13 897.43	V	-----	34.4	11.9	0.9	-----	47.2	-----	54.0	-----	6.8

Ch.215(7 025 MHz)

Frequency [MHz]	(P)	Reading PK [dBuV]	Reading AV [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]
14 071.00	H	46.9	-----	11.5	-----	58.4	-----	74.0	-----	15.6	-----
14 045.01	H	-----	34.6	11.5	0.9	-----	47.0	-----	54.0	-----	7.0
14 028.32	V	47.8	-----	11.5	-----	59.3	-----	74.0	-----	14.7	-----
14 050.21	V	-----	35.4	11.5	0.9	-----	47.8	-----	54.0	-----	6.2

Remarks


1. The unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in lie-down position(X axis) and the worst case was recorded.
2. Peak Result = Reading + c.f(Correction factor)
 Average Result = Reading + c.f(Correction factor) + Duty Cycle Factor
3. Correction factor = Antenna factor + Cable loss - Amp Gain



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2021-03423
 Page (229) / (248) Pages

Worst Case Mode :	802.11ax_HE80_SU
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 985 MHz
Channel :	7

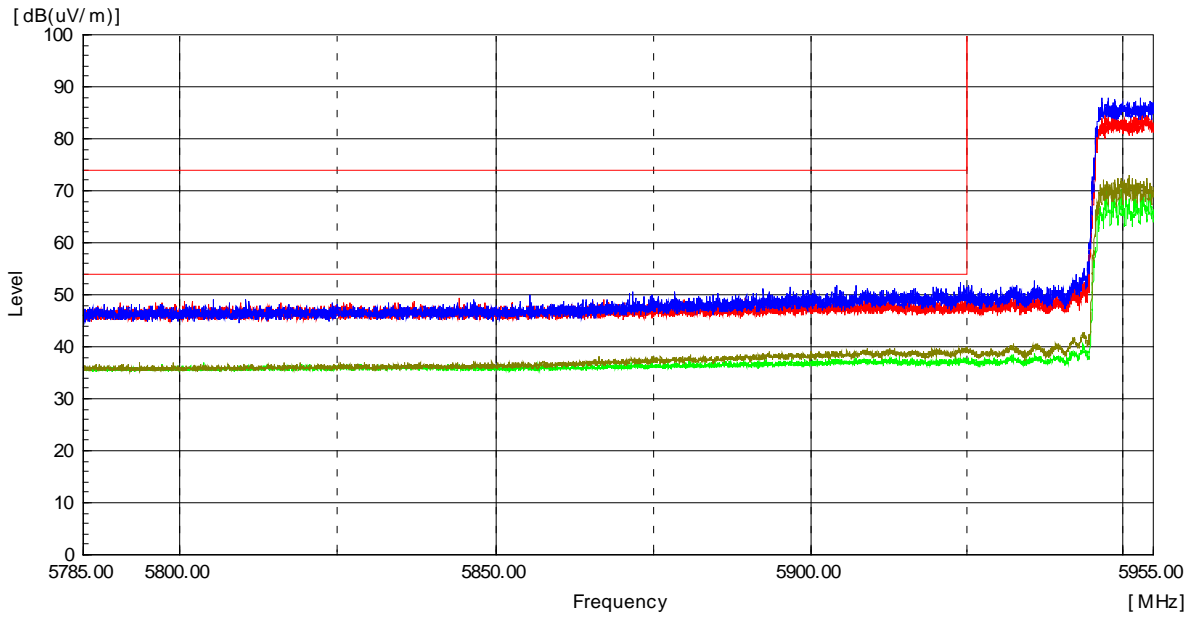


Frequency [MHz]	(P)	Reading PK [dBuV]	Reading AV [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]
-----------------	-----	-------------------	-------------------	---------------	------------------------	---------------------	---------------------	---------------------	---------------------	----------------	----------------

The emissions above 1 GHz were 20 dB lower than the limit.

Radiated Restricted Band Edge Plot

Worst Case Mode :	802.11ax_HE80_SU
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	7 025 MHz
Channel :	215

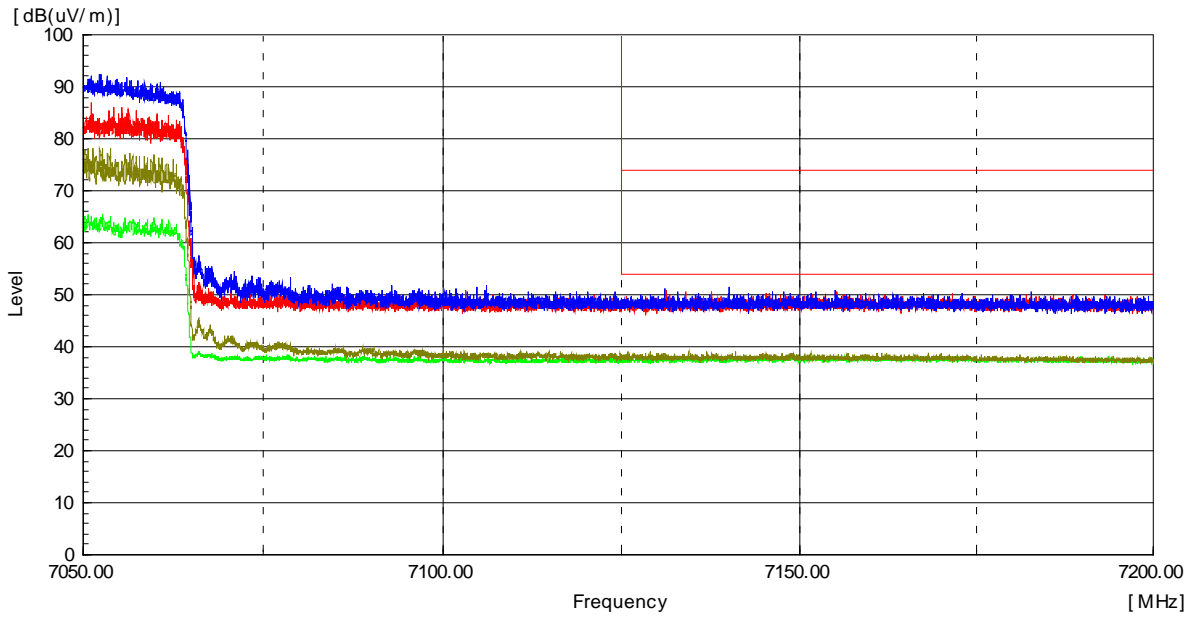

Frequency [MHz]	(P)	Reading PK [dBuV]	Reading AV [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]
-----------------	-----	-------------------	-------------------	---------------	------------------------	---------------------	---------------------	---------------------	---------------------	----------------	----------------

The emissions above 1 GHz were 20 dB lower than the limit.

Radiated Restricted Band Edge Plot



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2021-03423
 Page (231) / (248) Pages

Test mode : Transmitter, 802.11ax_HE20_26T

The requirements are:

Complies

Test Data

Ch.1(5 955 MHz)

Frequency [MHz]	(P)	Reading PK [dBuV]	Reading AV [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]
-----------------	-----	-------------------	-------------------	---------------	------------------------	---------------------	---------------------	---------------------	---------------------	----------------	----------------

The emissions above 1 GHz were 20 dB lower than the limit.

Ch.45(6 175 MHz)

Frequency [MHz]	(P)	Reading PK [dBuV]	Reading AV [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]
-----------------	-----	-------------------	-------------------	---------------	------------------------	---------------------	---------------------	---------------------	---------------------	----------------	----------------

The emissions above 1 GHz were 20 dB lower than the limit.

Ch.93(6 415 MHz)

Frequency [MHz]	(P)	Reading PK [dBuV]	Reading AV [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]
-----------------	-----	-------------------	-------------------	---------------	------------------------	---------------------	---------------------	---------------------	---------------------	----------------	----------------

The emissions above 1 GHz were 20 dB lower than the limit.

Ch.97(6 435 MHz)

Frequency [MHz]	(P)	Reading PK [dBuV]	Reading AV [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]
-----------------	-----	-------------------	-------------------	---------------	------------------------	---------------------	---------------------	---------------------	---------------------	----------------	----------------

The emissions above 1 GHz were 20 dB lower than the limit.

Ch.105(6 475 MHz)

Frequency [MHz]	(P)	Reading PK [dBuV]	Reading AV [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]
-----------------	-----	-------------------	-------------------	---------------	------------------------	---------------------	---------------------	---------------------	---------------------	----------------	----------------

The emissions above 1 GHz were 20 dB lower than the limit.

Ch.113(6 515 MHz)

Frequency [MHz]	(P)	Reading PK [dBuV]	Reading AV [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]
-----------------	-----	-------------------	-------------------	---------------	------------------------	---------------------	---------------------	---------------------	---------------------	----------------	----------------

The emissions above 1 GHz were 20 dB lower than the limit.



Ch.117(6 535 MHz)

Frequency [MHz]	(P)	Reading PK [dBuV]	Reading AV [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]
-----------------	-----	-------------------	-------------------	---------------	------------------------	---------------------	---------------------	---------------------	---------------------	----------------	----------------

The emissions above 1 GHz were 20 dB lower than the limit.

Ch.149(6 695 MHz)

Frequency [MHz]	(P)	Reading PK [dBuV]	Reading AV [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]
-----------------	-----	-------------------	-------------------	---------------	------------------------	---------------------	---------------------	---------------------	---------------------	----------------	----------------

The emissions above 1 GHz were 20 dB lower than the limit.

Ch.181(6 855 MHz)

Frequency [MHz]	(P)	Reading PK [dBuV]	Reading AV [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]
-----------------	-----	-------------------	-------------------	---------------	------------------------	---------------------	---------------------	---------------------	---------------------	----------------	----------------

The emissions above 1 GHz were 20 dB lower than the limit.

Ch.185(6 875 MHz)

Frequency [MHz]	(P)	Reading PK [dBuV]	Reading AV [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]
-----------------	-----	-------------------	-------------------	---------------	------------------------	---------------------	---------------------	---------------------	---------------------	----------------	----------------

The emissions above 1 GHz were 20 dB lower than the limit.

Ch.209(6 995 MHz)

Frequency [MHz]	(P)	Reading PK [dBuV]	Reading AV [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]
-----------------	-----	-------------------	-------------------	---------------	------------------------	---------------------	---------------------	---------------------	---------------------	----------------	----------------

The emissions above 1 GHz were 20 dB lower than the limit.

Ch.229(7 095 MHz)

Frequency [MHz]	(P)	Reading PK [dBuV]	Reading AV [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]
-----------------	-----	-------------------	-------------------	---------------	------------------------	---------------------	---------------------	---------------------	---------------------	----------------	----------------

The emissions above 1 GHz were 20 dB lower than the limit.

Ch.233(7 115 MHz)

Frequency [MHz]	(P)	Reading PK [dBuV]	Reading AV [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]
-----------------	-----	-------------------	-------------------	---------------	------------------------	---------------------	---------------------	---------------------	---------------------	----------------	----------------

The emissions above 1 GHz were 20 dB lower than the limit.

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2021-03423
Page (233) / (248) Pages

Remarks


1. The unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in lie-down position(X axis) and the worst case was recorded.
2. Peak Result = Reading + c.f(Correction factor)
Average Result = Reading + c.f(Correction factor) + Duty Cycle Factor
3. Correction factor = Antenna factor + Cable loss - Amp Gain



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2021-03423
 Page (234) / (248) Pages

Worst Case Mode :	802.11ax_HE20_26T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 955 MHz
Channel :	1

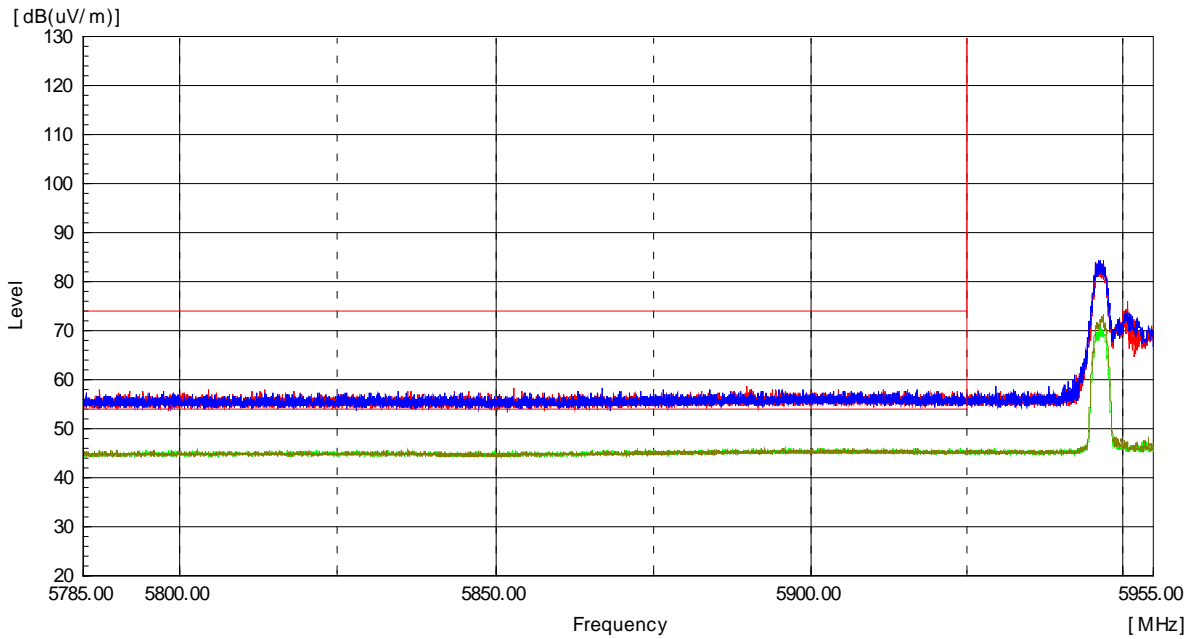


Frequency [MHz]	(P)	Reading PK [dBuV]	Reading AV [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]
-----------------	-----	-------------------	-------------------	---------------	------------------------	---------------------	---------------------	---------------------	---------------------	----------------	----------------

The emissions above 1 GHz were 20 dB lower than the limit.

Radiated Restricted Band Edge Plot

Worst Case Mode :	802.11ax_HE20_26T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	7 095 MHz
Channel :	229

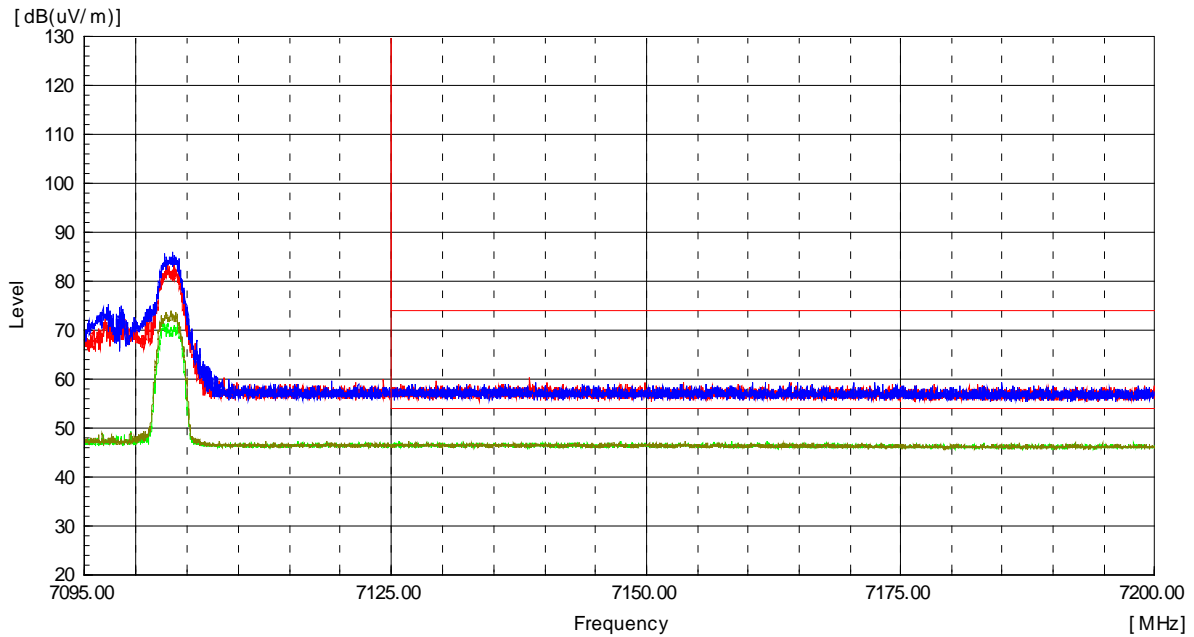


Frequency [MHz]	(P)	Reading PK [dBuV]	Reading AV [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]
-----------------	-----	-------------------	-------------------	---------------	------------------------	---------------------	---------------------	---------------------	---------------------	----------------	----------------

The emissions above 1 GHz were 20 dB lower than the limit.

Radiated Restricted Band Edge Plot

Worst Case Mode :	802.11ax_HE20_26T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	7 115 MHz
Channel :	233

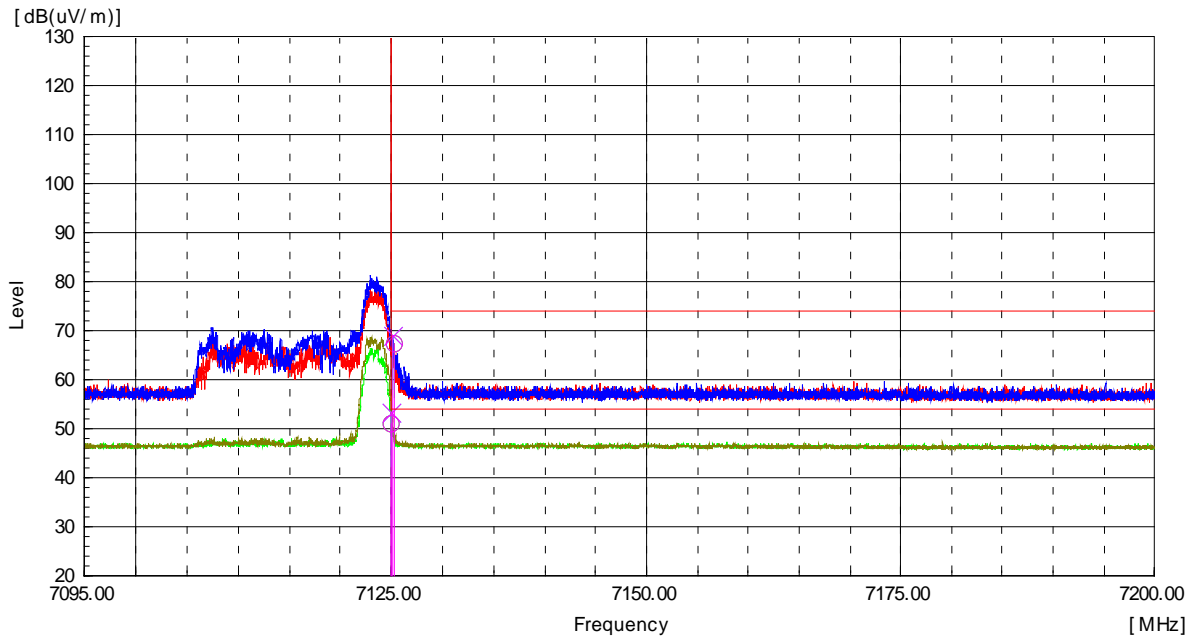

Frequency [MHz]	(P)	Reading PK [dBuV]	Reading AV [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]
7 125.20	H	63.2	-----	4.3	-----	67.5	-----	74.0	-----	6.5	-----
7 125.00	H	-----	46.6	4.3	0.2	-----	51.1	-----	54.0	-----	2.9
7 125.14	V	64.8	-----	4.3	-----	69.1	-----	74.0	-----	4.9	-----
7 125.00	V	-----	48.9	4.3	0.2	-----	53.4	-----	54.0	-----	0.6

Radiated Restricted Band Edge Plot



Test mode : Transmitter, 802.11ax_HE40_26T

The requirements are:

Complies

Test Data

Ch.3(5 965 MHz)

Frequency [MHz]	(P)	Reading PK [dBuV]	Reading AV [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]
-----------------	-----	-------------------	-------------------	---------------	------------------------	---------------------	---------------------	---------------------	---------------------	----------------	----------------

The emissions above 1 GHz were 20 dB lower than the limit.

Ch.43(6 165 MHz)

Frequency [MHz]	(P)	Reading PK [dBuV]	Reading AV [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]
-----------------	-----	-------------------	-------------------	---------------	------------------------	---------------------	---------------------	---------------------	---------------------	----------------	----------------

The emissions above 1 GHz were 20 dB lower than the limit.

Ch.91(6 405 MHz)

Frequency [MHz]	(P)	Reading PK [dBuV]	Reading AV [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]
-----------------	-----	-------------------	-------------------	---------------	------------------------	---------------------	---------------------	---------------------	---------------------	----------------	----------------

The emissions above 1 GHz were 20 dB lower than the limit.

Ch.99(6 445 MHz)

Frequency [MHz]	(P)	Reading PK [dBuV]	Reading AV [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]
-----------------	-----	-------------------	-------------------	---------------	------------------------	---------------------	---------------------	---------------------	---------------------	----------------	----------------

The emissions above 1 GHz were 20 dB lower than the limit.

Ch.107(6 485 MHz)

Frequency [MHz]	(P)	Reading PK [dBuV]	Reading AV [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]
-----------------	-----	-------------------	-------------------	---------------	------------------------	---------------------	---------------------	---------------------	---------------------	----------------	----------------

The emissions above 1 GHz were 20 dB lower than the limit.

Ch.115(6 525 MHz)

Frequency [MHz]	(P)	Reading PK [dBuV]	Reading AV [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]
-----------------	-----	-------------------	-------------------	---------------	------------------------	---------------------	---------------------	---------------------	---------------------	----------------	----------------

The emissions above 1 GHz were 20 dB lower than the limit.



Ch.147(6 685 MHz)

Frequency [MHz]	(P)	Reading PK [dBuV]	Reading AV [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]
-----------------	-----	-------------------	-------------------	---------------	------------------------	---------------------	---------------------	---------------------	---------------------	----------------	----------------

The emissions above 1 GHz were 20 dB lower than the limit.

Ch.179(6 845 MHz)

Frequency [MHz]	(P)	Reading PK [dBuV]	Reading AV [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]
-----------------	-----	-------------------	-------------------	---------------	------------------------	---------------------	---------------------	---------------------	---------------------	----------------	----------------

The emissions above 1 GHz were 20 dB lower than the limit.

Ch.187(6 885 MHz)

Frequency [MHz]	(P)	Reading PK [dBuV]	Reading AV [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]
-----------------	-----	-------------------	-------------------	---------------	------------------------	---------------------	---------------------	---------------------	---------------------	----------------	----------------

The emissions above 1 GHz were 20 dB lower than the limit.

Ch.211(7 005 MHz)

Frequency [MHz]	(P)	Reading PK [dBuV]	Reading AV [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]
-----------------	-----	-------------------	-------------------	---------------	------------------------	---------------------	---------------------	---------------------	---------------------	----------------	----------------

The emissions above 1 GHz were 20 dB lower than the limit.

Ch.227(7 085 MHz)

Frequency [MHz]	(P)	Reading PK [dBuV]	Reading AV [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]
-----------------	-----	-------------------	-------------------	---------------	------------------------	---------------------	---------------------	---------------------	---------------------	----------------	----------------

The emissions above 1 GHz were 20 dB lower than the limit.

Remarks


1. The unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in lie-down position(X axis) and the worst case was recorded.
2. Peak Result = Reading + c.f(Correction factor)
 Average Result = Reading + c.f(Correction factor) + Duty Cycle Factor
3. Correction factor = Antenna factor + Cable loss - Amp Gain



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2021-03423
 Page (239) / (248) Pages

Worst Case Mode :	802.11ax_HE40_26T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 965 MHz
Channel :	3

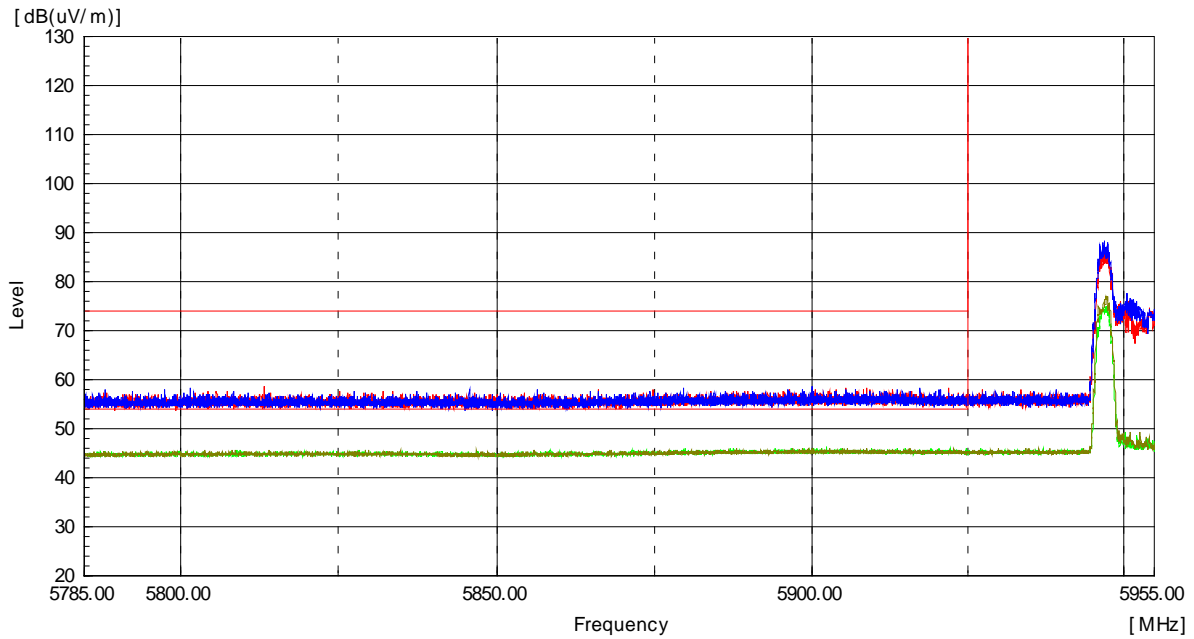


Frequency [MHz]	(P)	Reading PK [dBuV]	Reading AV [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]
-----------------	-----	-------------------	-------------------	---------------	------------------------	---------------------	---------------------	---------------------	---------------------	----------------	----------------

The emissions above 1 GHz were 20 dB lower than the limit.

Radiated Restricted Band Edge Plot

Worst Case Mode :	802.11ax_HE40_26T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	7 085 MHz
Channel :	227

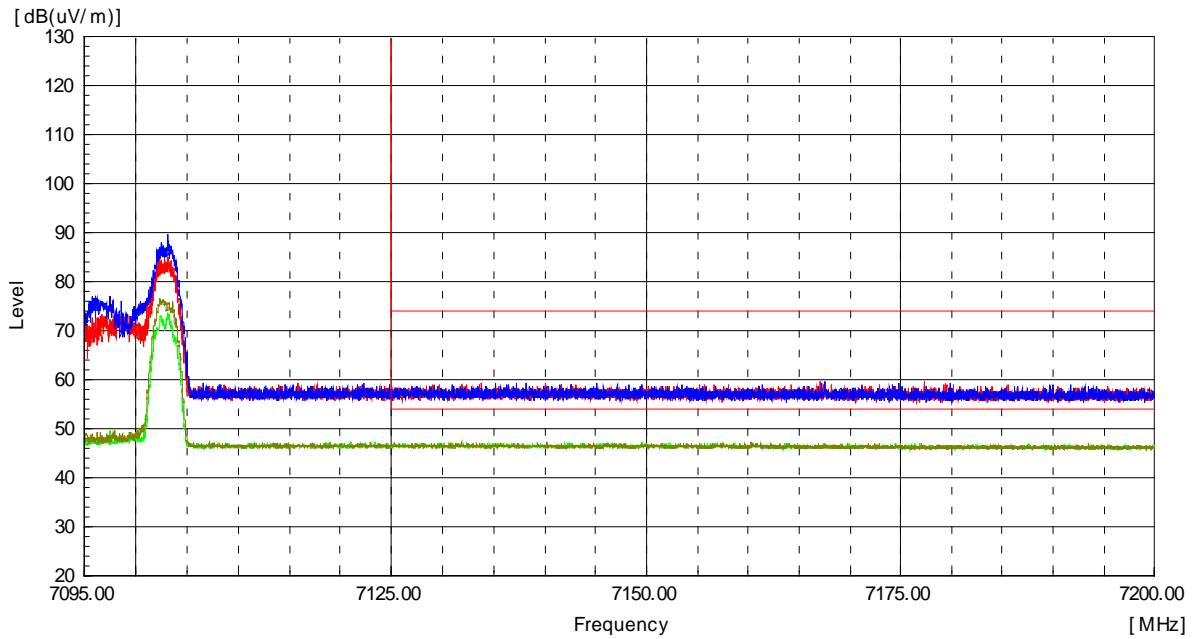

Frequency [MHz]	(P)	Reading PK [dBuV]	Reading AV [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]
-----------------	-----	-------------------	-------------------	---------------	------------------------	---------------------	---------------------	---------------------	---------------------	----------------	----------------

The emissions above 1 GHz were 20 dB lower than the limit.

Radiated Restricted Band Edge Plot



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2021-03423
 Page (241) / (248) Pages

Test mode : Transmitter, 802.11ax_HE80_26T

The requirements are:

Complies

Test Data

Ch.7(5 985 MHz)

Frequency [MHz]	(P)	Reading PK [dBuV]	Reading AV [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]
-----------------	-----	-------------------	-------------------	---------------	------------------------	---------------------	---------------------	---------------------	---------------------	----------------	----------------

The emissions above 1 GHz were 20 dB lower than the limit.

Ch.39(6 145 MHz)

Frequency [MHz]	(P)	Reading PK [dBuV]	Reading AV [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]
-----------------	-----	-------------------	-------------------	---------------	------------------------	---------------------	---------------------	---------------------	---------------------	----------------	----------------

The emissions above 1 GHz were 20 dB lower than the limit.

Ch.87(6 385 MHz)

Frequency [MHz]	(P)	Reading PK [dBuV]	Reading AV [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]
-----------------	-----	-------------------	-------------------	---------------	------------------------	---------------------	---------------------	---------------------	---------------------	----------------	----------------

The emissions above 1 GHz were 20 dB lower than the limit.

Ch.103(6 465 MHz)

Frequency [MHz]	(P)	Reading PK [dBuV]	Reading AV [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]
-----------------	-----	-------------------	-------------------	---------------	------------------------	---------------------	---------------------	---------------------	---------------------	----------------	----------------

The emissions above 1 GHz were 20 dB lower than the limit.

Ch.119(6 545 MHz)

Frequency [MHz]	(P)	Reading PK [dBuV]	Reading AV [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]
-----------------	-----	-------------------	-------------------	---------------	------------------------	---------------------	---------------------	---------------------	---------------------	----------------	----------------

The emissions above 1 GHz were 20 dB lower than the limit.

Ch.151(6 705 MHz)

Frequency [MHz]	(P)	Reading PK [dBuV]	Reading AV [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]
-----------------	-----	-------------------	-------------------	---------------	------------------------	---------------------	---------------------	---------------------	---------------------	----------------	----------------

The emissions above 1 GHz were 20 dB lower than the limit.



Ch.183(6 865 MHz)

Frequency [MHz]	(P)	Reading PK [dBuV]	Reading AV [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]
-----------------	-----	-------------------	-------------------	---------------	------------------------	---------------------	---------------------	---------------------	---------------------	----------------	----------------

The emissions above 1 GHz were 20 dB lower than the limit.

Ch.199(6 945 MHz)

Frequency [MHz]	(P)	Reading PK [dBuV]	Reading AV [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]
-----------------	-----	-------------------	-------------------	---------------	------------------------	---------------------	---------------------	---------------------	---------------------	----------------	----------------

The emissions above 1 GHz were 20 dB lower than the limit.

Ch.215(7 025 MHz)

Frequency [MHz]	(P)	Reading PK [dBuV]	Reading AV [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]
-----------------	-----	-------------------	-------------------	---------------	------------------------	---------------------	---------------------	---------------------	---------------------	----------------	----------------

The emissions above 1 GHz were 20 dB lower than the limit.

Remarks


1. The unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down positon(X,Y axis). The worst emission was found in lie-down positon(X axis) and the worst case was recorded.
2. Peak Result = Reading + c.f(Correction factor)
 Average Result = Reading + c.f(Correction factor) + Duty Cycle Factor
3. Correction factor = Antenna factor + Cable loss - Amp Gain



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2021-03423
 Page (243) / (248) Pages

Worst Case Mode :	802.11ax_HE80_26T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 985 MHz
Channel :	7

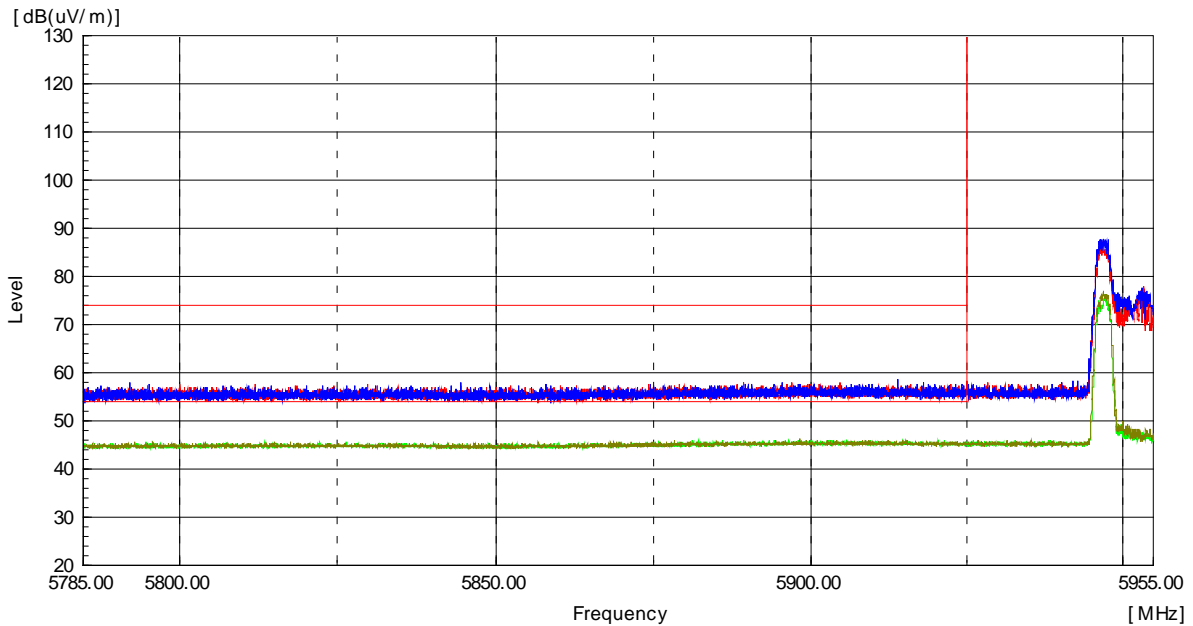

Frequency [MHz]	(P)	Reading PK [dBuV]	Reading AV [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]
-----------------	-----	-------------------	-------------------	---------------	------------------------	---------------------	---------------------	---------------------	---------------------	----------------	----------------

The emissions above 1 GHz were 20 dB lower than the limit.


Radiated Restricted Band Edge Plot



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2021-03423
 Page (244) / (248) Pages

Worst Case Mode :	802.11ax_HE80_26T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	7 025 MHz
Channel :	215

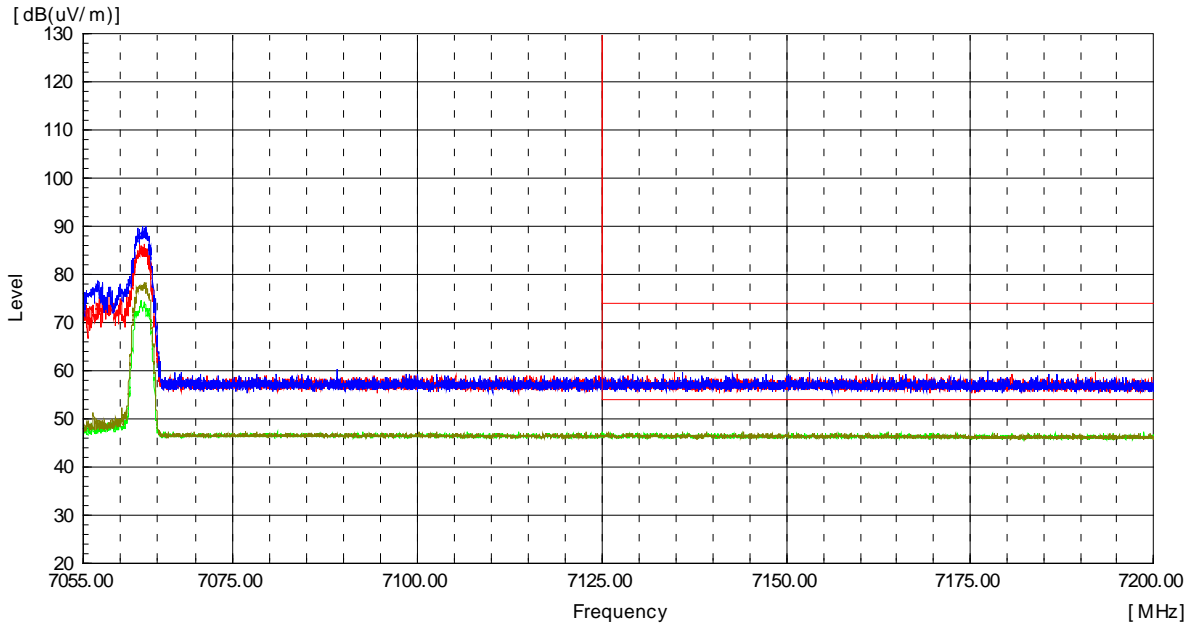

Frequency [MHz]	(P)	Reading PK [dBuV]	Reading AV [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]
-----------------	-----	-------------------	-------------------	---------------	------------------------	---------------------	---------------------	---------------------	---------------------	----------------	----------------

The emissions above 1 GHz were 20 dB lower than the limit.

Radiated Restricted Band Edge Plot



CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2021-03423
Page (245) / (248) Pages

4.8 AC Conducted Emissions

Test Location

Shielded Room

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Procedures

The EUT was placed on a non-metallic table 0.8m above the metallic, grounded floor and 0.4m from the reference ground plane wall. The distance to other metallic surfaces was at least 0.8m.

Amplitude measurements were performed with a quasi-peak detector and an average detector.

Limit

- 15.207(a)

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56*	56 to 46*
0.5 ~ 5	56	46
5 ~ 30	60	50

* Decreases with the logarithm of the frequency.

Test Results


The requirements are:

Complies

Test Data

[LINE]

3CE_Class B_N

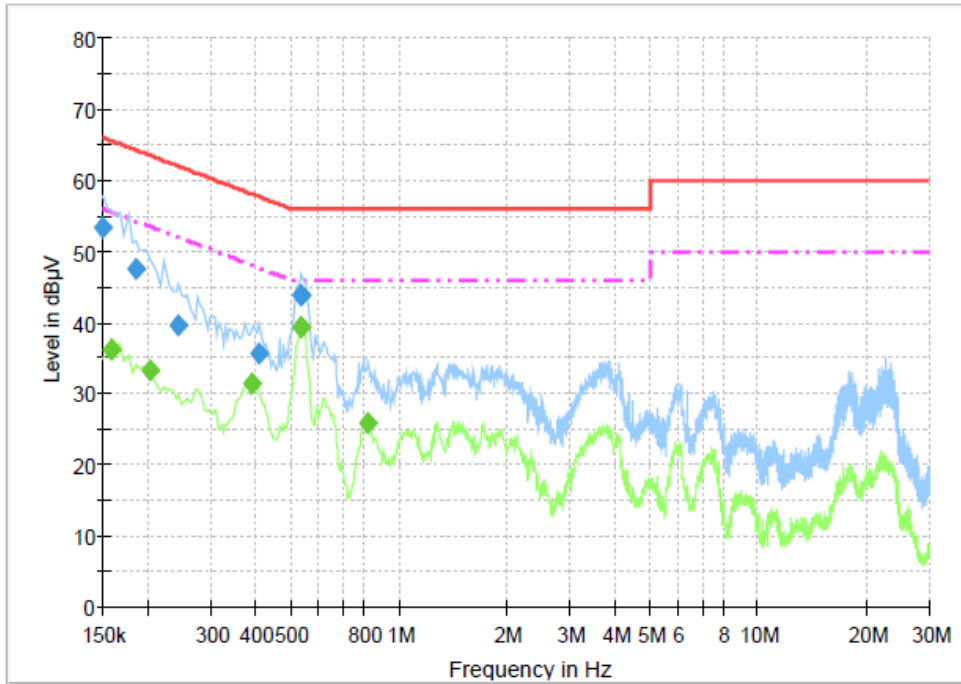


Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	53.3	1000.0	9.000	On	N	9.8	12.7	66.0
0.186000	47.5	1000.0	9.000	On	N	9.9	16.7	64.2
0.244500	39.6	1000.0	9.000	On	N	9.7	22.3	61.9
0.406500	35.7	1000.0	9.000	On	N	9.9	22.0	57.7
0.532500	43.8	1000.0	9.000	On	N	9.9	12.2	56.0
0.537000	43.8	1000.0	9.000	On	N	9.9	12.2	56.0

Final Result 2

Frequency (MHz)	CAverage (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.159000	36.3	1000.0	9.000	On	N	9.9	19.3	55.5
0.204000	33.2	1000.0	9.000	On	N	9.8	20.2	53.4
0.388500	31.3	1000.0	9.000	On	N	9.9	16.8	48.1
0.532500	39.2	1000.0	9.000	On	N	9.9	6.8	46.0
0.537000	39.3	1000.0	9.000	On	N	9.9	6.7	46.0
0.820500	26.0	1000.0	9.000	On	N	9.8	20.0	46.0

[NEUTRAL]
3CE_Class B_L1

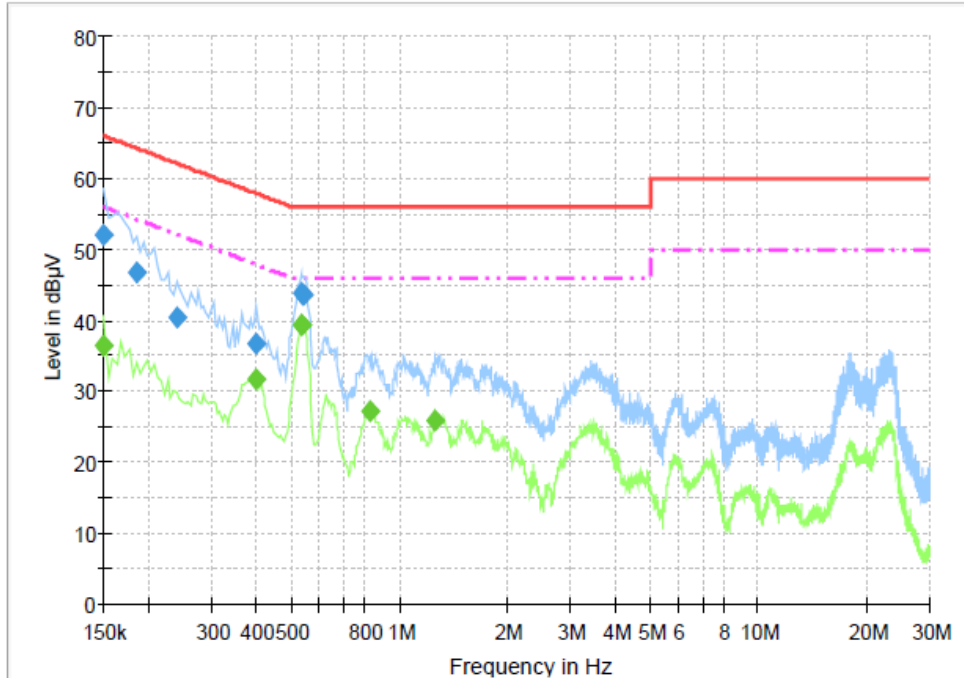

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	52.0	1000.0	9.000	On	L1	9.7	14.0	66.0
0.186000	46.6	1000.0	9.000	On	L1	9.9	17.6	64.2
0.240000	40.3	1000.0	9.000	On	L1	9.7	21.8	62.1
0.397500	36.7	1000.0	9.000	On	L1	9.9	21.2	57.9
0.532500	43.8	1000.0	9.000	On	L1	9.9	12.2	56.0
0.541500	43.6	1000.0	9.000	On	L1	9.9	12.4	56.0

Final Result 2

Frequency (MHz)	CAverage (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	36.5	1000.0	9.000	On	L1	9.7	19.5	56.0
0.397500	31.8	1000.0	9.000	On	L1	9.9	16.1	47.9
0.532500	39.3	1000.0	9.000	On	L1	9.9	6.7	46.0
0.537000	39.3	1000.0	9.000	On	L1	9.9	6.7	46.0
0.825000	27.2	1000.0	9.000	On	L1	9.8	18.8	46.0
1.261500	25.9	1000.0	9.000	On	L1	9.8	20.1	46.0



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2021-03423
 Page (248) / (248) Pages

APPENDIX A – Test Equipment Used For Tests

	Name of Equipment	Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date
1	Signal Analyzer	Agilent	N9020A	MY50200096	2021-01-24	2022-01-24
2	Signal Analyzer	Agilent	N9020A	MY50510240	2021-07-19	2022-07-19
3	Signal Generator	Rohde & Schwarz	SMB100A	175528	2021-04-12	2022-04-12
4	EMI Test Receiver	Rohde & Schwarz	ESCI7	100814	2020-10-20	2021-10-20
5	Bilog Antenna	Schaffner	CBL6111C	2551	2020-05-26	2022-05-26
6	Active Loop Antenna	SCHWARZBECK	FMZB 1513	1513-126	2020-05-20	2022-05-20
7	6dB Attenuator	R&S	DNF	272.4110.50-2	2020-10-23	2021-10-23
8	6dB Attenuator	BIRD	5W 6dB	1744	2020-12-16	2021-12-16
9	AMPLIFIER	SONOMA	310	291721	2021-01-22	2022-01-22
10	EMI Test Receiver	Rohde & Schwarz	ESU40	100336	2021-01-12	2022-01-12
11	Preamplifier	Agilent	8449B	3008A01504	2019-12-17	2020-12-17
12	Horn Antenna	ETS-Lindgren	3117	00154525	2020-10-14	2021-10-14
13	Horn Antenna	SCHWARZBECK	BBHA9170	00967	2021-05-25	2022-05-25
14	Low Noise Amplifier	TESTEK	TK-PA1840H	200115-L	2021-05-21	2022-05-21
15	LISN	Rohde & Schwarz	ENV216	101235	2021-01-12	2022-01-12
16	Temp&Humi Chamber	ESPEC CORP.	SH-242	93008423	2021-05-03	2022-05-03
17	Wide Bandwidth Sensor	Anritsu	MA2491A	845498	2020-10-15	2021-10-15
18	Power Meter	Anritsu	ML2488B	924006	2020-10-15	2021-10-15
19	Combiner/Divider	Weinschel	1580-1	PE428	2020-09-14	2021-09-14
20	Vector Signal Generator	Rohde & Schwarz	SMW200A	102423	2021-04-07	2022-04-07

	Cable	Manufacturer	Model No.	Serial No.	Check Date
1	RF Cable	Canare Corporation	L-5D2W	N/A	2021-01-21
2	RF Cable	Junkosha Inc.	MWX221	1512S127	2021-08-04
3	RF Cable	Junkosha Inc.	MWX221	2005S319	2021-08-04
4	RF Cable	HUBER+SUHNER	SUCOFLEX 102	MY073/2	2021-06-01
5	RF Cable	HUBER+SUHNER	SUCOFLEX 104	MY27558/4	2021-06-01
6	RF Cable	HUBER+SUHNER	SUCOFLEX 104	N/A	2021-06-01
7	RF Cable	HUBER+SUHNER	SUCOFLEX 104	MY27573/4	2021-06-01
8	RF Cable	HUBER+SUHNER	SUCOFLEX 106	N/A	2021-06-01
9	RF Cable	HUBER+SUHNER	SUCOFLEX 102	803010/2	2020-10-16
10	RF Cable	HUBER+SUHNER	SUCOFLEX 102	803742/2	2020-10-16
11	RF Cable	HUBER+SUHNER	SUCOFLEX 102	MY2374/2	2021-06-01
12	RF Cable	HUBER+SUHNER	SUCOFLEX 102	MY4728/2	2021-06-01