



Worst Case Mode :	802.11a-ANT1
Worst Case Transfer Rate :	6 Mbps
Distance of Measurements :	3 Meters
Operating Frequency :	5 180 MHz
Channel :	36

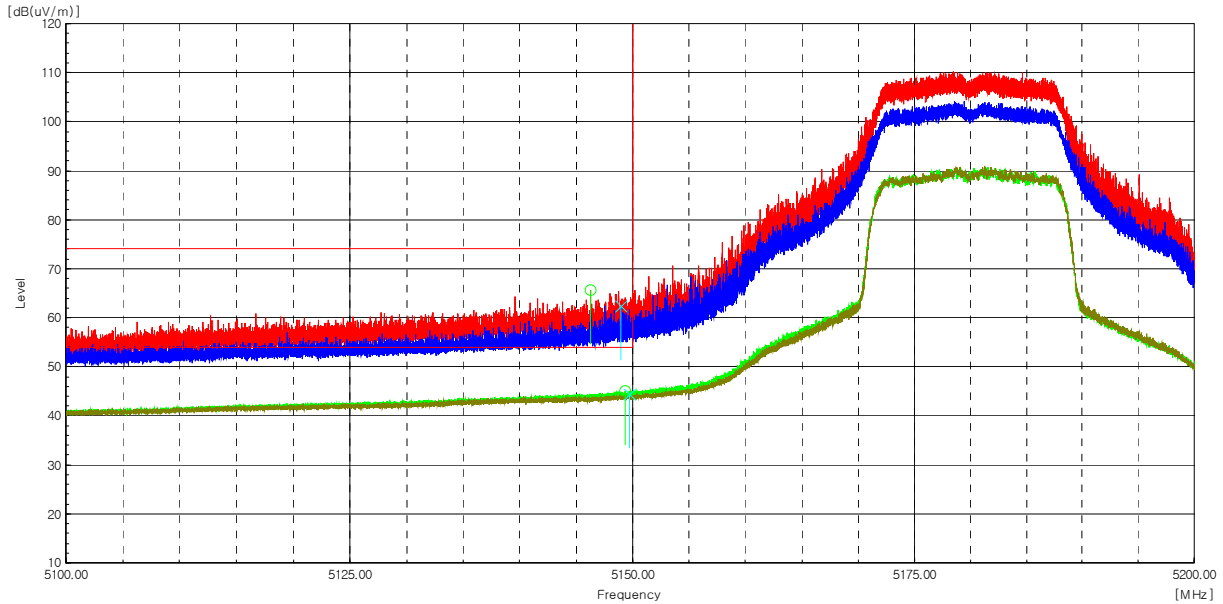

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
5 146.29	H	63.0	2.7	-----	65.7	-----	74.0	-----	8.3	-----	Peak
5 149.30	H	42.4	2.7	0.1	-----	45.2	-----	54.0	-----	8.8	Average
5 148.91	V	59.7	2.7	-----	62.4	-----	74.0	-----	11.6	-----	Peak
5 149.73	V	41.7	2.7	0.1	-----	44.5	-----	54.0	-----	9.5	Average

Radiated Restricted Band Edge Plot


Worst Case Mode :	802.11a-ANT1
Worst Case Transfer Rate :	6 Mbps
Distance of Measurements :	3 Meters
Operating Frequency :	5 320 MHz
Channel :	64

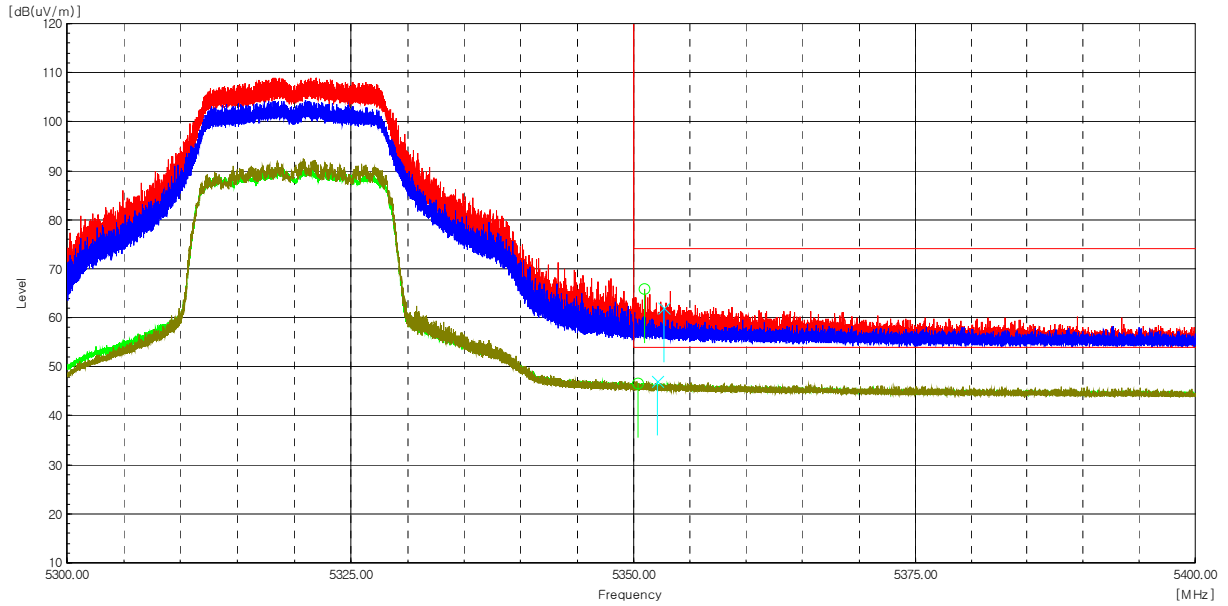

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
5 350.98	H	62.9	2.9	-----	65.8	-----	74.0	-----	8.2	-----	Peak
5 350.35	H	43.8	2.9	0.1	-----	46.8	-----	54.0	-----	7.2	Average
5 352.66	V	59.1	2.9	-----	62.0	-----	74.0	-----	12.0	-----	Peak
5 352.14	V	44.2	2.9	0.1	-----	47.2	-----	54.0	-----	6.8	Average

Radiated Restricted Band Edge Plot

Worst Case Mode :	802.11a-ANT1
Worst Case Transfer Rate :	6 Mbps
Distance of Measurements :	3 Meters
Operating Frequency :	5 500 MHz
Channel :	100

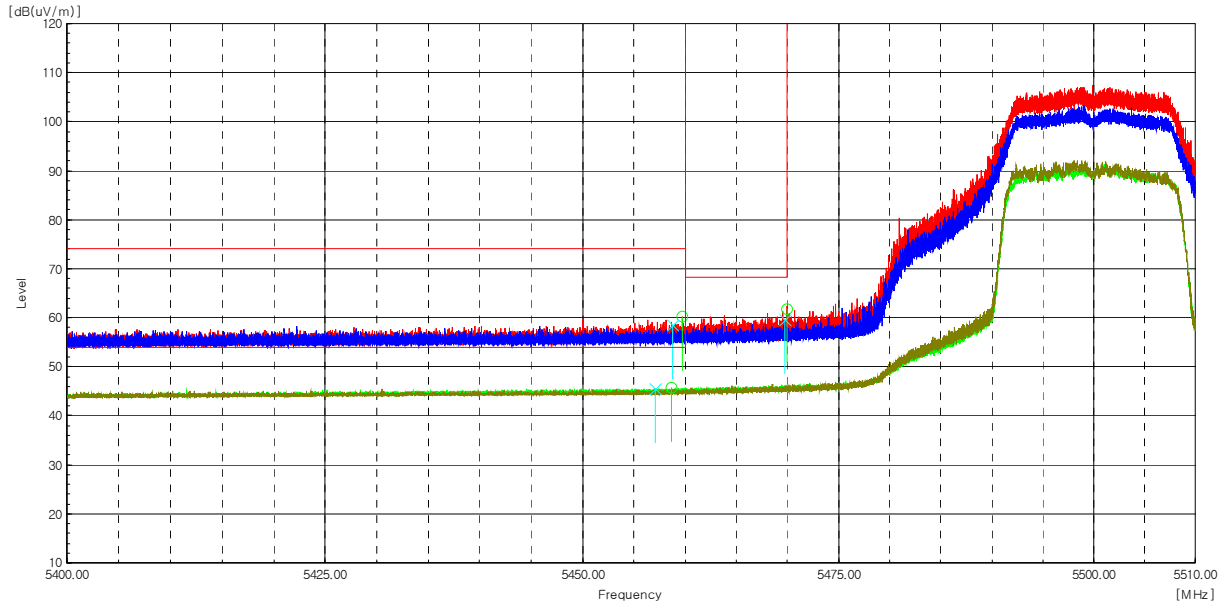

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
5 459.73	H	56.4	3.8	-----	60.2	-----	74.0	-----	13.8	-----	Peak
5 458.64	H	41.9	3.8	0.1	-----	45.8	-----	54.0	-----	8.2	Average
5 458.80	V	54.8	3.8	-----	58.6	-----	74.0	-----	15.4	-----	Peak
5 457.13	V	41.7	3.8	0.1	-----	45.6	-----	54.0	-----	8.4	Average
5 469.99	H	57.9	3.8	-----	61.7	-----	68.2	-----	6.5	-----	Peak
5 469.73	V	55.7	3.8	-----	59.5	-----	68.2	-----	8.7	-----	Peak


Radiated Restricted Band Edge Plot



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2023-00951
 Page (455) / (659) Pages

Worst Case Mode :	802.11a-ANT1
Worst Case Transfer Rate :	6 Mbps
Distance of Measurements :	3 Meters
Operating Frequency :	5 700 MHz
Channel :	140

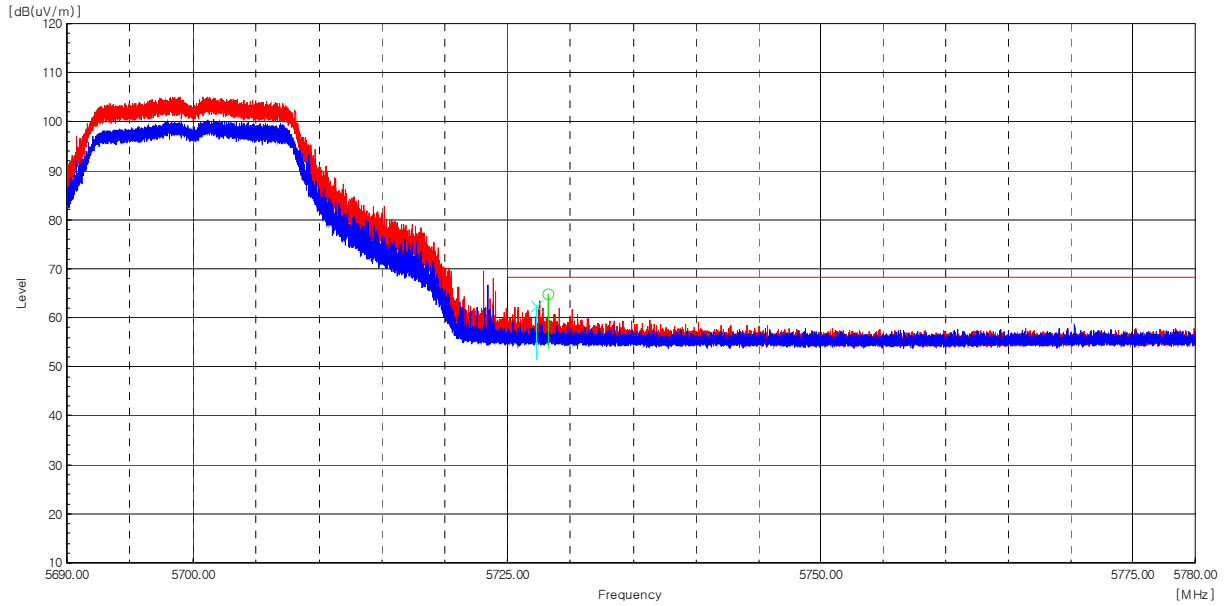

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
5 728.24	H	60.8	3.9	-----	64.7	-----	68.2	-----	3.5	-----	Peak
5 727.27	V	58.5	3.9	-----	62.4	-----	68.2	-----	5.8	-----	Peak


Radiated Restricted Band Edge Plot



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2023-00951
 Page (456) / (659) Pages

Worst Case Mode :	802.11a-ANT1
Worst Case Transfer Rate :	6 Mbps
Distance of Measurements :	3 Meters
Operating Frequency :	5 745 MHz
Channel :	149

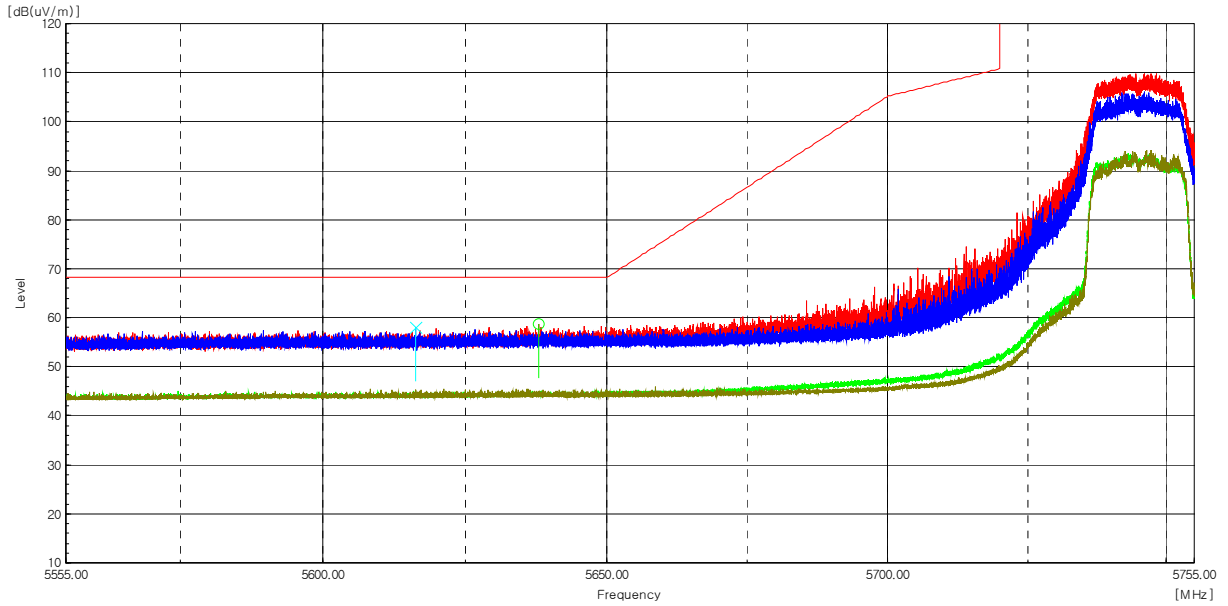

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
5 637.93	H	54.6	4.1	-----	58.7	-----	68.2	-----	9.5	-----	Peak
5 616.31	V	53.9	4.1	-----	58.0	-----	68.2	-----	10.2	-----	Peak


Radiated Restricted Band Edge Plot



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2023-00951
 Page (457) / (659) Pages

Worst Case Mode :	802.11a-ANT1
Worst Case Transfer Rate :	6 Mbps
Distance of Measurements :	3 Meters
Operating Frequency :	5 825 MHz
Channel :	165

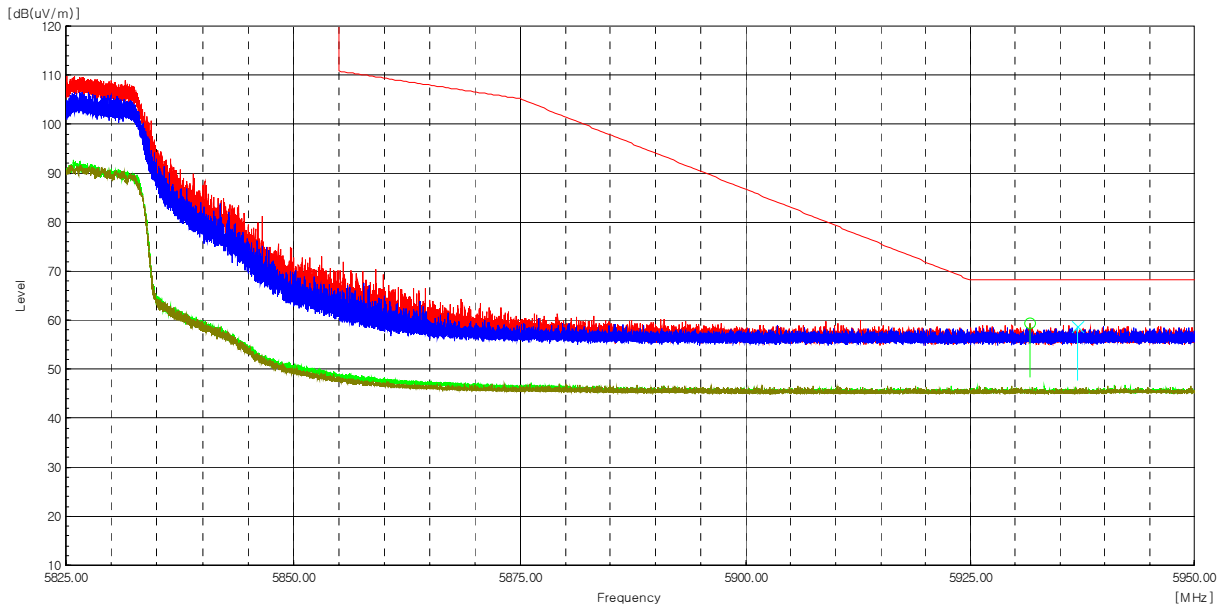

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
5 931.63	H	54.3	5.0	-----	59.3	-----	68.2	-----	8.9	-----	Peak
5 936.90	V	53.7	5.0	-----	58.7	-----	68.2	-----	9.5	-----	Peak


Radiated Restricted Band Edge Plot



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2023-00951
 Page (458) / (659) Pages

Worst Case Mode :	802.11a-ANT1
Worst Case Transfer Rate :	6 Mbps
Distance of Measurements :	3 Meters
Operating Frequency :	5 845 MHz
Channel :	165

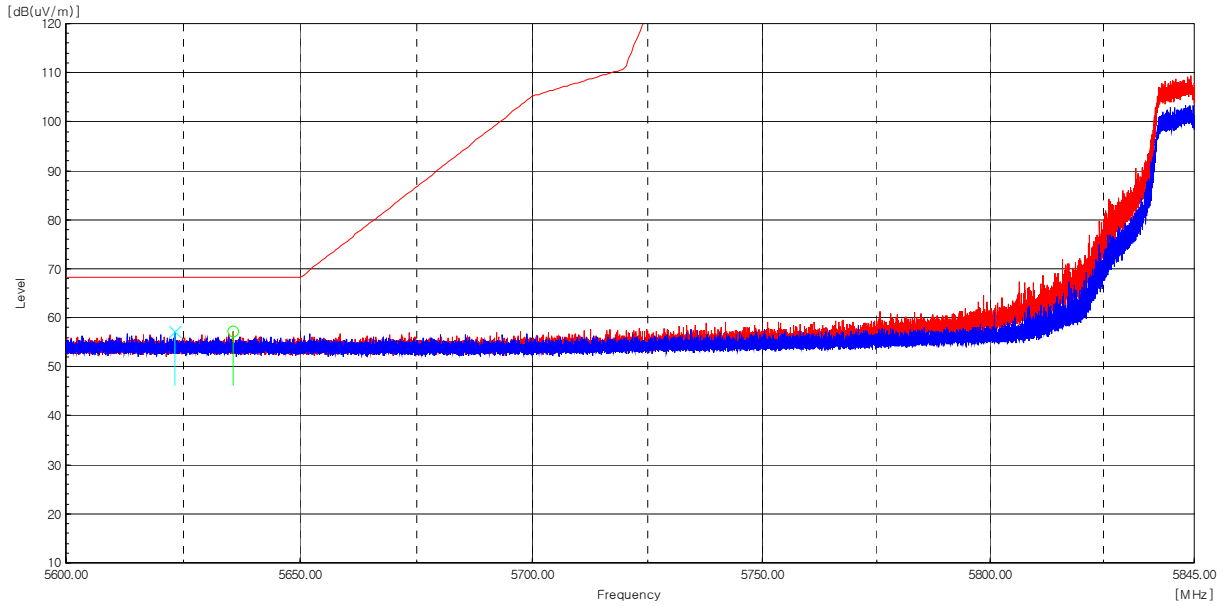

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
5 623.29	V	53.0	4.1	-----	57.1	-----	68.2	-----	11.1	-----	Peak
5 635.66	H	53.1	4.1	-----	57.2	-----	68.2	-----	11.0	-----	Peak


Radiated Restricted Band Edge Plot



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2023-00951
 Page (459) / (659) Pages

Worst Case Mode :	802.11a-ANT1
Worst Case Transfer Rate :	6 Mbps
Distance of Measurements :	3 Meters
Operating Frequency :	5 885 MHz
Channel :	177

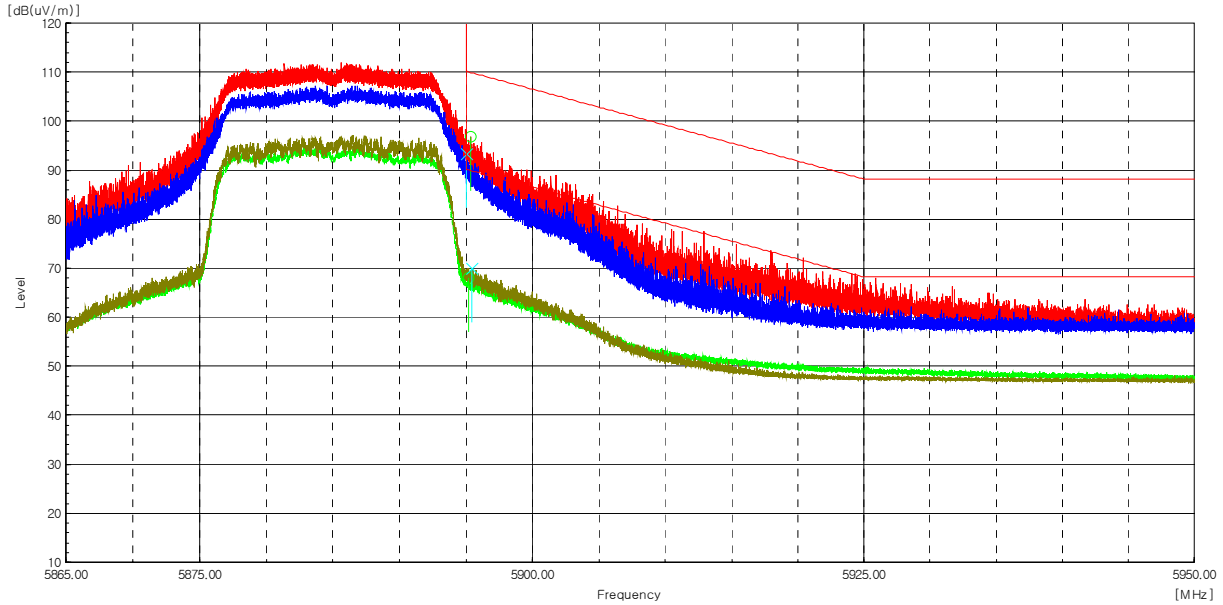

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
5 895.38	H	92.1	4.7	-----	96.8	-----	109.9	-----	13.1	-----	Peak
5 895.22	H	63.3	4.7	0.1	-----	68.1	-----	90.0	-----	21.9	Average
5 895.07	V	88.6	4.7	-----	93.3	-----	110.2	-----	16.9	-----	Peak
5 895.47	V	65.4	4.7	0.1	-----	70.2	-----	89.9	-----	19.7	Average

Radiated Restricted Band Edge Plot



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2023-00951
 Page (460) / (659) Pages

Test mode : Transmitter, 802.11n_HT20

The requirements are:

Complies

Test Data

Ch.36(5 180 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
10 359.89	H	54.4	11.3	-----	65.7	-----	68.2	-----	2.5	-----	Peak
10 359.44	V	50.0	11.3	-----	61.3	-----	68.2	-----	6.9	-----	Peak
15 536.86	H	50.5	14.0	-----	64.5	-----	74.0	-----	9.5	-----	Peak
15 540.01	H	36.2	14.0	0.1	-----	50.3	-----	54.0	-----	3.7	Average

Ch.40(5 200 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
10 396.98	H	54.9	11.3	-----	66.2	-----	68.2	-----	2.0	-----	Peak
10 401.81	V	50.0	11.3	-----	61.3	-----	68.2	-----	6.9	-----	Peak
15 596.59	H	51.3	13.9	-----	65.2	-----	74.0	-----	8.8	-----	Peak
15 604.19	H	36.0	13.9	0.1	-----	50.0	-----	54.0	-----	4.0	Average

Ch.48(5 240 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
10 484.70	H	54.5	11.7	-----	66.2	-----	68.2	-----	2.0	-----	Peak
10 481.67	V	48.8	11.7	-----	60.5	-----	68.2	-----	7.7	-----	Peak
15 718.74	H	50.6	14.2	-----	64.8	-----	74.0	-----	9.2	-----	Peak
15 716.88	H	37.2	14.2	0.1	-----	51.5	-----	54.0	-----	2.5	Average

Ch.52(5 260 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
10 524.18	H	56.9	11.7	-----	67.8	-----	68.2	-----	0.4	-----	Peak
10 514.91	V	50.8	11.7	-----	62.5	-----	68.2	-----	5.7	-----	Peak
15 786.62	H	54.7	14.1	-----	68.8	-----	74.0	-----	5.2	-----	Peak
15 778.84	H	37.9	14.2	0.1	-----	52.2	-----	54.0	-----	1.8	Average
15 782.45	V	50.2	14.1	-----	64.3	-----	74.0	-----	9.7	-----	Peak
15 783.47	V	36.1	14.1	0.1	-----	50.3	-----	54.0	-----	3.7	Average

Ch.60(5 300 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
10 597.02	H	55.1	11.7	-----	66.8	-----	74.0	-----	7.2	-----	Peak
10 599.47	H	37.5	11.7	0.1	-----	49.3	-----	54.0	-----	4.7	Average
10 601.98	V	49.7	11.7	-----	61.4	-----	74.0	-----	12.6	-----	Peak
10 599.59	V	35.0	11.7	0.1	-----	46.8	-----	54.0	-----	7.2	Average
15 893.48	H	54.0	14.3	-----	68.3	-----	74.0	-----	5.7	-----	Peak
15 903.02	H	36.9	14.3	0.1	-----	51.3	-----	54.0	-----	2.7	Average

Ch.64(5 320 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
10 644.74	H	54.6	11.7	-----	66.3	-----	74.0	-----	7.7	-----	Peak
10 639.20	H	36.7	11.7	0.1	-----	48.5	-----	54.0	-----	5.5	Average
10 641.91	V	49.2	11.7	-----	60.9	-----	74.0	-----	13.1	-----	Peak
10 639.52	V	34.3	11.7	0.1	-----	46.1	-----	54.0	-----	7.9	Average
15 960.34	H	52.5	14.2	-----	66.7	-----	74.0	-----	7.3	-----	Peak
15 965.16	H	37.1	14.2	0.1	-----	51.4	-----	54.0	-----	2.6	Average

Ch.100(5 500 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
11 001.40	H	50.4	12.0	-----	62.4	-----	74.0	-----	11.6	-----	Peak
11 001.66	H	34.9	12.0	0.1	-----	47.0	-----	54.0	-----	7.0	Average
10 999.21	V	47.0	12.0	-----	59.0	-----	74.0	-----	15.0	-----	Peak
11 006.43	V	33.7	12.1	0.1	-----	45.9	-----	54.0	-----	8.1	Average
16 502.16	H	49.5	16.3	-----	65.8	-----	68.2	-----	2.4	-----	Peak

Ch.120(5 600 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
11 198.28	H	52.7	12.7	-----	65.4	-----	74.0	-----	8.6	-----	Peak
11 198.73	H	36.3	12.7	0.1	-----	49.1	-----	54.0	-----	4.9	Average
11 196.54	V	47.9	12.7	-----	60.6	-----	74.0	-----	13.4	-----	Peak
11 201.82	V	34.0	12.8	0.1	-----	46.9	-----	54.0	-----	7.1	Average

Ch.140(5 700 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
11 401.02	H	52.6	12.7	-----	65.3	-----	74.0	-----	8.7	-----	Peak
11 401.08	H	35.5	12.7	0.1	-----	48.3	-----	54.0	-----	5.7	Average
11 400.57	V	46.2	12.7	-----	58.9	-----	74.0	-----	15.1	-----	Peak
11 382.41	V	34.2	12.5	0.1	-----	46.8	-----	54.0	-----	7.2	Average

Ch.144(5 720 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
11 440.63	H	51.6	12.8	-----	64.4	-----	74.0	-----	9.6	-----	Peak
11 438.37	H	35.0	12.8	0.1	-----	47.9	-----	54.0	-----	6.1	Average
11 438.70	V	46.2	12.8	-----	59.0	-----	74.0	-----	15.0	-----	Peak
11 435.86	V	33.7	12.8	0.1	-----	46.6	-----	54.0	-----	7.4	Average

Ch.149(5 745 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
11 488.67	H	52.9	12.7	-----	65.6	-----	74.0	-----	8.4	-----	Peak
11 488.74	H	35.0	12.7	0.1	-----	47.8	-----	54.0	-----	6.2	Average
11 480.82	V	46.5	12.7	-----	59.2	-----	74.0	-----	14.8	-----	Peak
11 534.46	V	34.0	12.8	0.1	-----	46.9	-----	54.0	-----	7.1	Average
17 245.40	H	47.7	19.2	-----	66.9	-----	68.2	-----	1.3	-----	Peak

Ch.157(5 785 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
11 569.11	H	49.1	13.0	-----	62.1	-----	74.0	-----	11.9	-----	Peak
11 568.47	H	34.3	13.0	0.1	-----	47.4	-----	54.0	-----	6.6	Average
11 576.45	V	46.1	13.0	-----	59.1	-----	74.0	-----	14.9	-----	Peak
11 563.83	V	33.5	13.0	0.1	-----	46.6	-----	54.0	-----	7.4	Average
17 348.84	H	48.0	19.6	-----	67.6	-----	68.2	-----	0.6	-----	Peak

Ch.165(5 825 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
11 651.35	H	49.1	12.8	-----	61.9	-----	74.0	-----	12.1	-----	Peak
11 650.65	H	34.6	12.8	0.1	-----	47.5	-----	54.0	-----	6.5	Average
11 650.00	V	47.5	12.8	-----	60.3	-----	74.0	-----	13.7	-----	Peak
11 649.23	V	33.9	12.8	0.1	-----	46.8	-----	54.0	-----	7.2	Average
17 480.24	H	47.2	20.3	-----	67.5	-----	68.2	-----	0.7	-----	Peak

Ch.169(5 845 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
11 690.90	H	50.4	12.6	-----	63.0	-----	74.0	-----	11.0	-----	Peak
11 691.03	H	34.9	12.6	0.1	-----	47.6	-----	54.0	-----	6.4	Average
11 693.09	V	47.2	12.6	-----	59.8	-----	74.0	-----	14.2	-----	Peak
11 649.61	V	33.4	12.8	0.1	-----	46.3	-----	54.0	-----	7.7	Average
17 533.95	H	47.6	20.2	-----	67.8	-----	68.2	-----	0.4	-----	Peak



Ch.173(5 865 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
11 730.83	H	50.5	12.6	-----	63.1	-----	74.0	-----	10.9	-----	Peak
11 728.38	H	35.0	12.6	0.1	-----	47.7	-----	54.0	-----	6.3	Average
11 728.51	V	47.9	12.6	-----	60.5	-----	74.0	-----	13.5	-----	Peak
11 754.20	V	34.3	12.7	0.1	-----	47.1	-----	54.0	-----	6.9	Average
17 593.13	H	46.8	20.3	-----	67.1	-----	68.2	-----	1.1	-----	Peak

Ch.177(5 885 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
11 771.01	H	50.9	12.8	-----	63.7	-----	74.0	-----	10.3	-----	Peak
11 770.63	H	35.6	12.8	0.1	-----	48.5	-----	54.0	-----	5.5	Average
11 770.50	V	48.3	12.8	-----	61.1	-----	74.0	-----	12.9	-----	Peak
11 841.99	V	34.0	13.0	0.1	-----	47.1	-----	54.0	-----	6.9	Average
17 641.38	H	47.5	20.4	-----	67.9	-----	68.2	-----	0.3	-----	Peak
17 653.14	V	46.5	20.4	-----	66.9	-----	68.2	-----	1.3	-----	Average

Remarks


1. The unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in lie-down position(X axis) and the worst case was recorded.
2. Peak Result = Reading + c.f(Correction factor)
 Average Result = Reading + c.f(Correction factor) + Duty Cycle Factor
3. Correction factor = Antenna factor + Cable loss - Amp Gain



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2023-00951
 Page (465) / (659) Pages


Worst Case Mode :	802.11n_HT20
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 180 MHz
Channel :	36

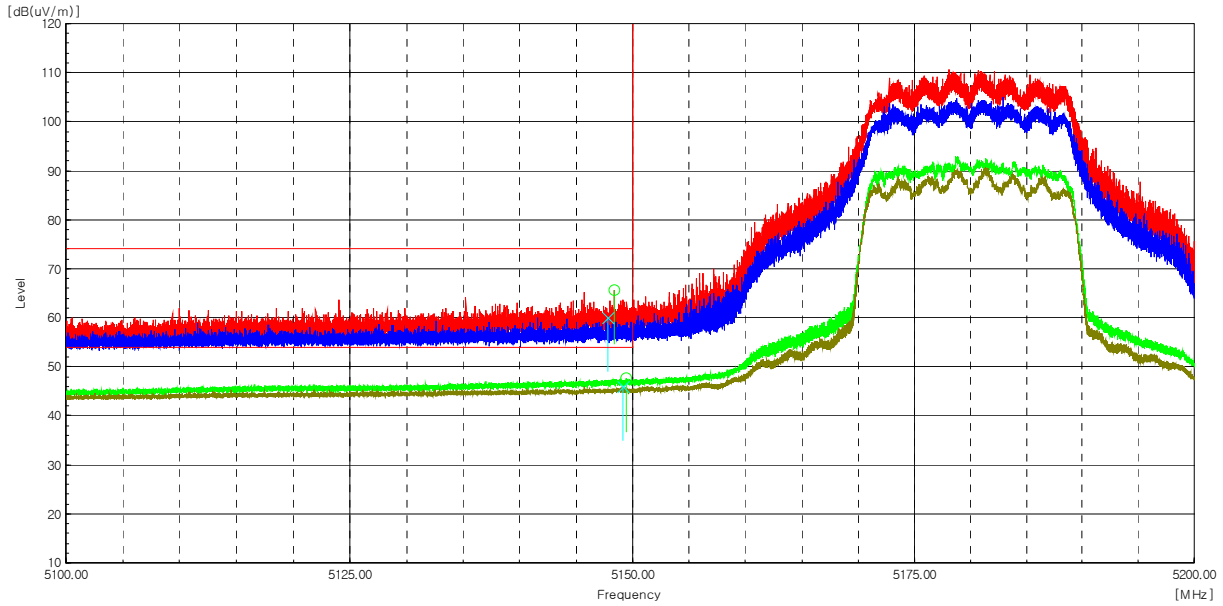

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
5 148.38	H	62.9	2.7	-----	65.6	-----	74.0	-----	8.4	-----	Peak
5 149.44	H	45.0	2.7	0.1	-----	47.8	-----	54.0	-----	6.2	Average
5 147.82	V	57.3	2.7	-----	60.0	-----	74.0	-----	14.0	-----	Peak
5 149.10	V	43.3	2.7	0.1	-----	46.1	-----	54.0	-----	7.9	Average

Radiated Restricted Band Edge Plot


Worst Case Mode :	802.11n_HT20
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 320 MHz
Channel :	64

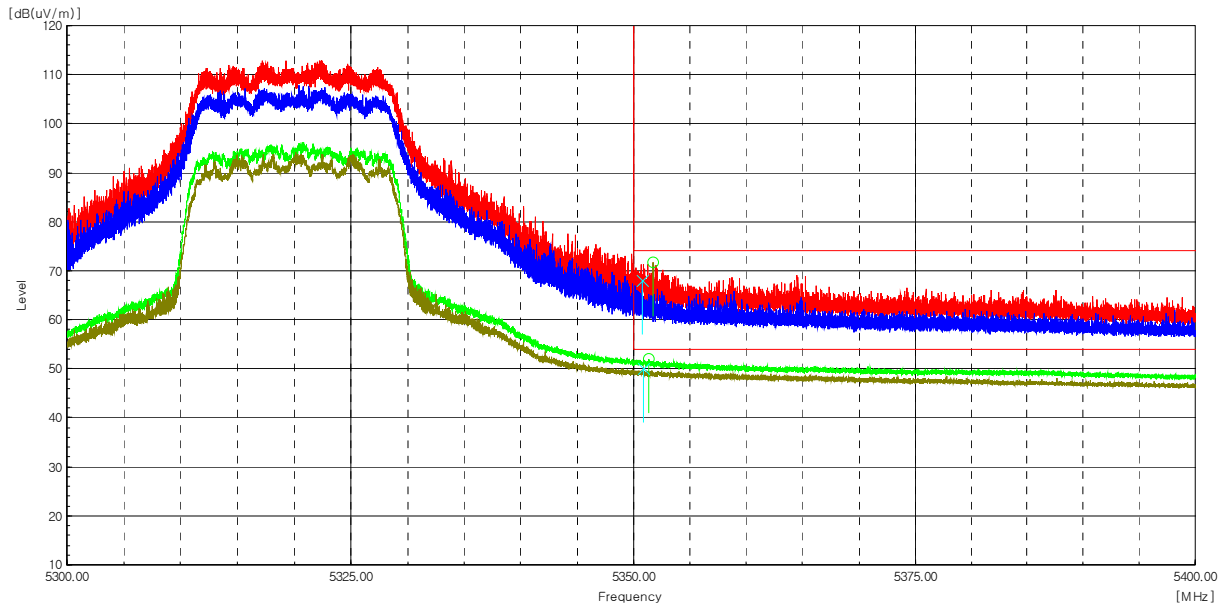

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
5 351.69	H	68.7	2.9	-----	71.6	-----	74.0	-----	2.4	-----	Peak
5 351.35	H	49.1	2.9	0.1	-----	52.1	-----	54.0	-----	1.9	Average
5 350.80	V	65.2	2.9	-----	68.1	-----	74.0	-----	5.9	-----	Peak
5 350.82	V	47.2	2.9	0.1	-----	50.2	-----	54.0	-----	3.8	Average

Radiated Restricted Band Edge Plot

Worst Case Mode :	802.11n_HT20
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 500 MHz
Channel :	100

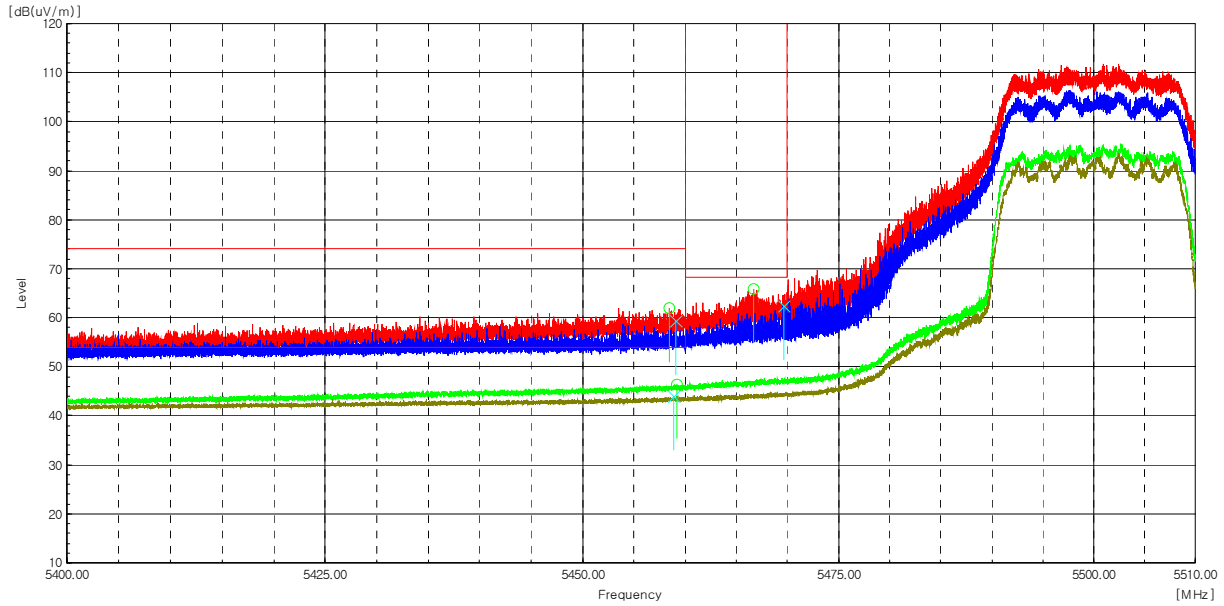

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
5 458.44	H	58.2	3.8	-----	62.0	-----	74.0	-----	12.0	-----	Peak
5 459.17	H	42.6	3.8	0.1	-----	46.5	-----	54.0	-----	7.5	Peak
5 459.13	V	55.7	3.8	-----	59.5	-----	74.0	-----	14.5	-----	Peak
5 458.93	V	40.1	3.8	0.1	-----	44.0	-----	54.0	-----	10.0	Average
5 466.71	H	62.0	3.8	-----	65.8	-----	68.2	-----	2.4	-----	Peak
5 469.66	V	58.6	3.8	-----	62.4	-----	68.2	-----	5.8	-----	Average


Radiated Restricted Band Edge Plot



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2023-00951
 Page (468) / (659) Pages

Worst Case Mode :	802.11n_HT20
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 700 MHz
Channel :	140

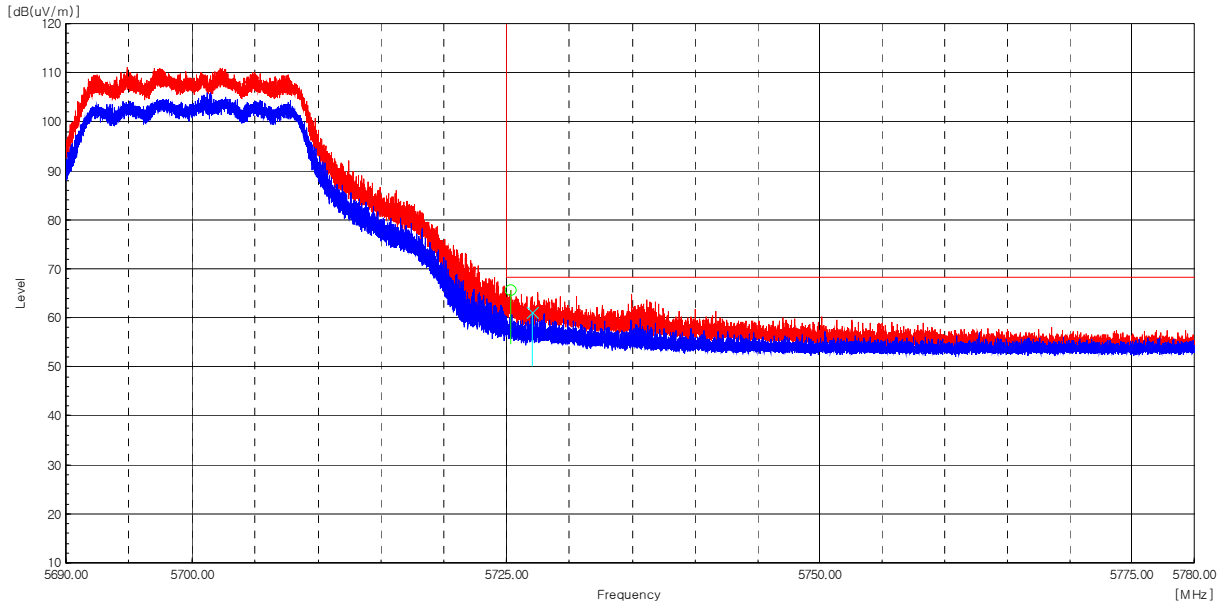

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
5 725.32	H	61.7	3.8	-----	65.5	-----	68.2	-----	2.7	-----	Peak
5 727.00	V	57.1	3.9	-----	61.0	-----	68.2	-----	7.2	-----	Peak


Radiated Restricted Band Edge Plot



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2023-00951
 Page (469) / (659) Pages

Worst Case Mode :	802.11n_HT20
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 745 MHz
Channel :	149

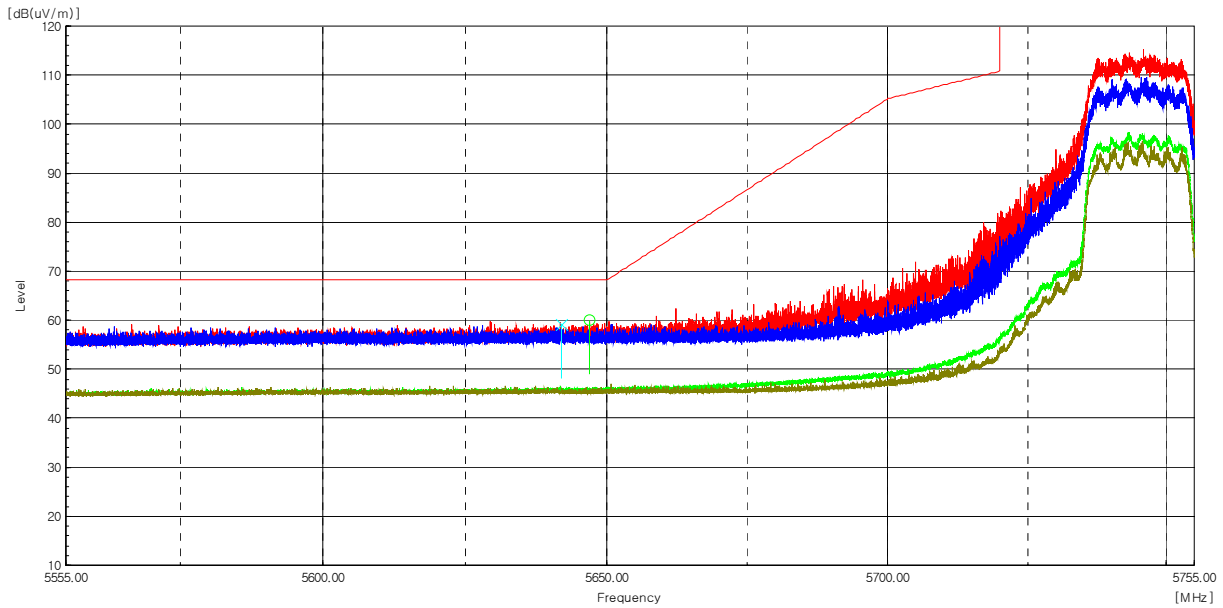

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
5 647.04	H	56.0	4.0	-----	60.0	-----	68.2	-----	8.2	-----	Peak
5 641.92	V	55.1	4.1	-----	59.2	-----	68.2	-----	9.0	-----	Peak


Radiated Restricted Band Edge Plot



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2023-00951
 Page (470) / (659) Pages

Worst Case Mode :	802.11n_HT20
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 825 MHz
Channel :	165

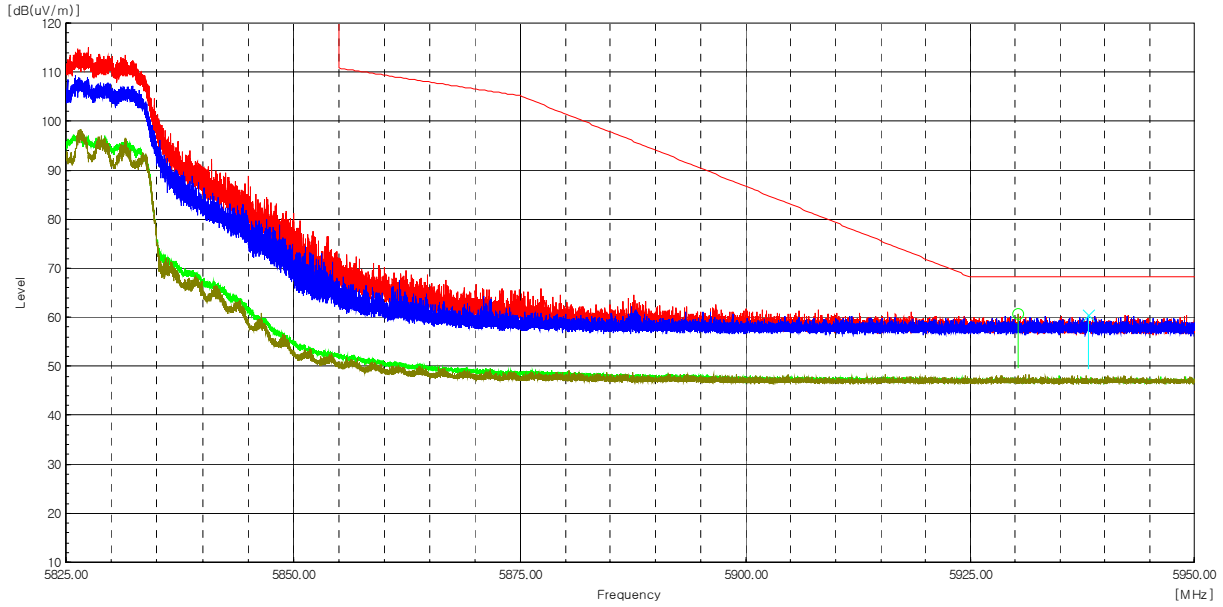

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
5 930.32	H	55.6	5.0	-----	60.6	-----	68.2	-----	7.6	-----	Peak
5 938.12	V	55.4	5.0	-----	60.4	-----	68.2	-----	7.8	-----	Peak


Radiated Restricted Band Edge Plot



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2023-00951
 Page (471) / (659) Pages


Worst Case Mode :	802.11n_HT20
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 845 MHz
Channel :	165

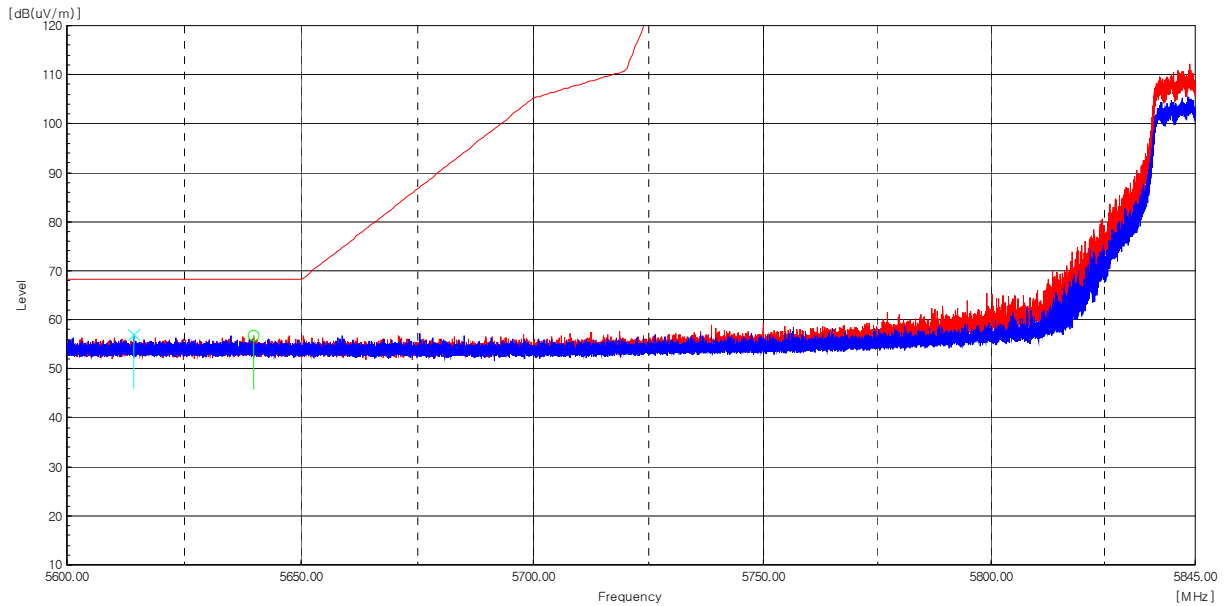

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
5 639.88	H	52.7	4.1	-----	56.8	-----	68.2	-----	11.4	-----	Peak
5 614.34	V	53.0	4.1	-----	57.1	-----	68.2	-----	11.1	-----	Peak

Radiated Restricted Band Edge Plot

Worst Case Mode :	802.11n_HT20
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 885 MHz
Channel :	177

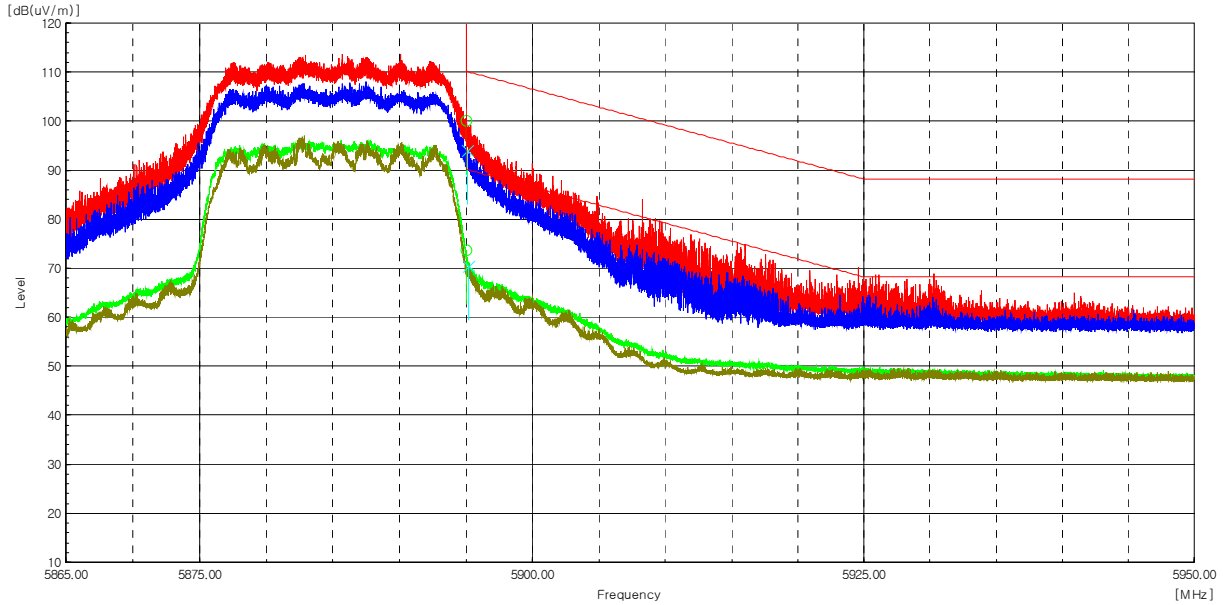

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
5 895.04	H	95.5	4.7	-----	100.2	-----	110.2	-----	10.0	-----	Peak
5 895.00	H	69.0	4.7	0.1	-----	73.8	-----	90.2	-----	16.4	Average
5 895.16	V	89.4	4.7	-----	94.1	-----	110.1	-----	16.0	-----	Peak
5 895.18	V	65.6	4.7	0.1	-----	70.4	-----	90.1	-----	19.7	Average

Radiated Restricted Band Edge Plot



Test mode : Transmitter, 802.11ac_VHT20

The requirements are:

Complies

Test Data

Ch.36(5 180 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
10 354.16	H	53.0	11.3	-----	64.3	-----	68.2	-----	3.9	-----	Peak
10 358.54	V	47.5	11.3	-----	58.8	-----	68.2	-----	9.4	-----	Peak
15 537.79	H	49.5	14.0	-----	63.5	-----	74.0	-----	10.5	-----	Peak
15 542.14	H	36.3	14.0	0.3	-----	50.6	-----	54.0	-----	3.4	Average

Ch.40(5 200 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
10 402.20	H	52.3	11.4	-----	63.7	-----	68.2	-----	4.5	-----	Peak
10 396.98	V	49.3	11.3	-----	60.6	-----	68.2	-----	7.6	-----	Peak
15 602.33	H	48.5	13.9	-----	62.4	-----	74.0	-----	11.6	-----	Peak
15 599.83	H	35.5	13.9	0.3	-----	49.7	-----	54.0	-----	4.3	Average

Ch.48(5 240 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
10 482.32	H	54.0	11.7	-----	65.7	-----	68.2	-----	2.5	-----	Peak
10 479.87	V	48.5	11.7	-----	60.2	-----	68.2	-----	8.0	-----	Peak
15 722.44	H	50.6	14.2	-----	64.8	-----	74.0	-----	9.2	-----	Peak
15 723.64	H	36.5	14.2	0.3	-----	51.0	-----	54.0	-----	3.0	Average

Ch.52(5 260 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
10 518.38	H	54.5	11.7	-----	66.2	-----	68.2	-----	2.0	-----	Peak
10 519.41	V	49.4	11.7	-----	61.1	-----	68.2	-----	7.1	-----	Peak
15 786.06	H	54.8	14.1	-----	68.9	-----	74.0	-----	5.1	-----	Peak
15 785.13	H	38.3	14.1	0.3	-----	52.7	-----	54.0	-----	1.3	Average

Ch.60(5 300 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
10 598.44	H	54.3	11.7	-----	66.0	-----	74.0	-----	8.0	-----	Peak
10 598.76	H	37.1	11.7	0.3	-----	49.1	-----	54.0	-----	4.9	Average
10 597.86	V	49.6	11.7	-----	61.3	-----	74.0	-----	12.7	-----	Peak
10 599.01	V	34.9	11.7	0.3	-----	46.9	-----	54.0	-----	7.1	Average
15 902.37	H	54.7	14.3	-----	69.0	-----	74.0	-----	5.0	-----	Peak
15 895.98	H	37.6	14.3	0.3	-----	52.2	-----	54.0	-----	1.8	Average

Ch.64(5 320 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
10 639.40	H	53.2	11.7	-----	64.9	-----	74.0	-----	9.1	-----	Peak
10 639.85	H	36.0	11.7	0.3	-----	48.0	-----	54.0	-----	6.0	Average
10 648.86	V	49.5	11.7	-----	61.2	-----	74.0	-----	12.8	-----	Peak
10 639.27	V	34.2	11.7	0.3	-----	46.2	-----	54.0	-----	7.8	Average
15 954.04	H	52.9	14.2	-----	67.1	-----	74.0	-----	6.9	-----	Peak
15 963.67	H	36.8	14.2	0.3	-----	51.3	-----	54.0	-----	2.7	Average

Ch.100(5 500 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
11 000.31	H	49.0	12.0	-----	61.0	-----	74.0	-----	13.0	-----	Peak
11 000.31	H	34.4	12.0	0.3	-----	46.7	-----	54.0	-----	7.3	Average
11 003.46	V	46.0	12.1	-----	58.1	-----	74.0	-----	15.9	-----	Peak
11 004.24	V	33.9	12.1	0.3	-----	46.3	-----	54.0	-----	7.7	Average
16 494.85	H	48.3	16.3	-----	64.6	-----	68.2	-----	3.6	-----	Peak

Ch.120(5 600 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
11 206.91	H	53.3	12.8	-----	66.1	-----	74.0	-----	7.9	-----	Peak
11 198.35	H	36.7	12.7	0.3	-----	49.7	-----	54.0	-----	4.3	Average
11 198.54	V	50.3	12.7	-----	63.0	-----	74.0	-----	11.0	-----	Peak
11 201.12	V	34.7	12.8	0.3	-----	47.8	-----	54.0	-----	6.2	Average
16 803.22	H	50.2	17.2	-----	67.4	-----	68.2	-----	0.8	-----	Peak

Ch.140(5 700 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
11 396.51	H	52.4	12.6	-----	65.0	-----	74.0	-----	9.0	-----	Peak
11 400.57	H	35.8	12.7	0.3	-----	48.8	-----	54.0	-----	5.2	Average
11 396.45	V	49.0	12.6	-----	61.6	-----	74.0	-----	12.4	-----	Peak
11 417.44	V	34.0	12.8	0.3	-----	47.1	-----	54.0	-----	6.9	Average
17 095.75	H	48.5	18.6	-----	67.1	-----	68.2	-----	1.1	-----	Peak

Ch.144(5 720 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
11 430.77	H	50.5	12.8	-----	63.3	-----	74.0	-----	10.7	-----	Peak
11 440.11	H	35.1	12.8	0.3	-----	48.2	-----	54.0	-----	5.8	Average
11 427.10	V	46.8	12.8	-----	59.6	-----	74.0	-----	14.4	-----	Peak
11 435.93	V	33.8	12.8	0.3	-----	46.9	-----	54.0	-----	7.1	Average
17 162.52	H	47.3	18.7	-----	66.0	-----	68.2	-----	2.2	-----	Peak

Ch.149(5 745 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
11 488.74	H	50.1	12.7	-----	62.8	-----	74.0	-----	11.2	-----	Peak
11 490.48	H	34.3	12.7	0.3	-----	47.3	-----	54.0	-----	6.7	Average
11 487.38	V	45.9	12.7	-----	58.6	-----	74.0	-----	15.4	-----	Peak
11 476.37	V	33.5	12.7	0.3	-----	46.5	-----	54.0	-----	7.5	Average
17 237.16	H	48.6	19.2	-----	67.8	-----	68.2	-----	0.4	-----	Peak

Ch.157(5 785 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
11 563.96	H	48.7	13.0	-----	61.7	-----	74.0	-----	12.3	-----	Peak
11 560.29	H	34.3	12.9	0.3	-----	47.5	-----	54.0	-----	6.5	Average
11 577.87	V	45.3	13.0	-----	58.3	-----	74.0	-----	15.7	-----	Peak
11 568.72	V	33.9	13.0	0.3	-----	47.2	-----	54.0	-----	6.8	Average
17 353.19	H	47.9	19.6	-----	67.5	-----	68.2	-----	0.7	-----	Peak



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2023-00951
 Page (476) / (659) Pages

Ch.165(5 825 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
11 646.52	H	49.4	12.8	-----	62.2	-----	74.0	-----	11.8	-----	Peak
11 650.26	H	34.3	12.8	0.3	-----	47.4	-----	54.0	-----	6.6	Average
11 644.98	V	47.1	12.8	-----	59.9	-----	74.0	-----	14.1	-----	Peak
11 635.38	V	33.5	12.9	0.3	-----	46.7	-----	54.0	-----	7.3	Average
17 479.69	H	46.9	20.3	-----	67.2	-----	68.2	-----	1.0	-----	Peak

Ch.169(5 845 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
11 686.45	H	50.0	12.6	-----	62.6	-----	74.0	-----	11.4	-----	Peak
11 688.84	H	34.2	12.6	0.3	-----	47.1	-----	54.0	-----	6.9	Average
11 686.00	V	46.1	12.6	-----	58.7	-----	74.0	-----	15.3	-----	Peak
11 688.58	V	33.2	12.6	0.3	-----	46.1	-----	54.0	-----	7.9	Average
17 536.92	H	47.5	20.2	-----	67.7	-----	68.2	-----	0.5	-----	Peak

Ch.173(5 865 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
11 728.76	H	51.2	12.6	-----	63.8	-----	74.0	-----	10.2	-----	Peak
11 731.28	H	34.5	12.6	0.3	-----	47.4	-----	54.0	-----	6.6	Average
11 731.15	V	46.3	12.6	-----	58.9	-----	74.0	-----	15.1	-----	Peak
11 742.74	V	33.9	12.7	0.3	-----	46.9	-----	54.0	-----	7.1	Average
17 608.50	H	47.0	20.4	-----	67.4	-----	68.2	-----	0.8	-----	Peak




Ch.177(5 885 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
11 777.00	H	50.8	12.9	-----	63.7	-----	74.0	-----	10.3	-----	Peak
11 769.66	H	34.8	12.8	0.3	-----	47.9	-----	54.0	-----	6.1	Average
11 762.25	V	46.8	12.8	-----	59.6	-----	74.0	-----	14.4	-----	Peak
11 780.74	V	33.9	12.9	0.3	-----	47.1	-----	54.0	-----	6.9	Average
17 652.02	H	46.5	20.4	-----	66.9	-----	68.2	-----	1.3	-----	Peak

Remarks

1. The unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down positon(X,Y axis). The worst emission was found in lie-down positon(X axis) and the worst case was recorded.
2. Peak Result = Reading + c.f(Correction factor)
 Average Result = Reading + c.f(Correction factor) + Duty Cycle Factor
3. Correction factor = Antenna factor + Cable loss - Amp Gain


Worst Case Mode :	802.11ac_VHT20
Worst Case Transfer Rate :	MNSS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 180 MHz
Channel :	36

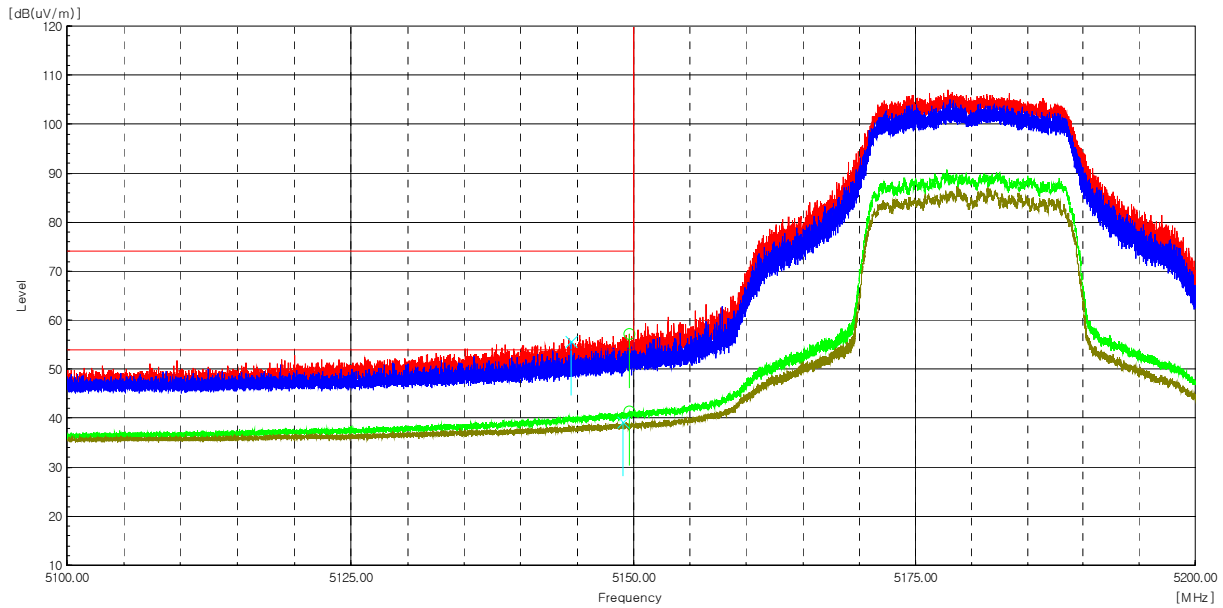

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
5 149.63	H	54.9	2.4	-----	57.3	-----	74.0	-----	16.7	-----	Peak
5 149.62	H	39.0	2.4	0.3	-----	41.7	-----	54.0	-----	12.3	Average
5 144.43	V	53.3	2.4	-----	55.7	-----	74.0	-----	18.3	-----	Peak
5 149.05	V	36.8	2.4	0.3	-----	39.5	-----	54.0	-----	14.5	Average

Radiated Restricted Band Edge Plot


Worst Case Mode :	802.11ac_VHT20
Worst Case Transfer Rate :	MNSS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 320 MHz
Channel :	64

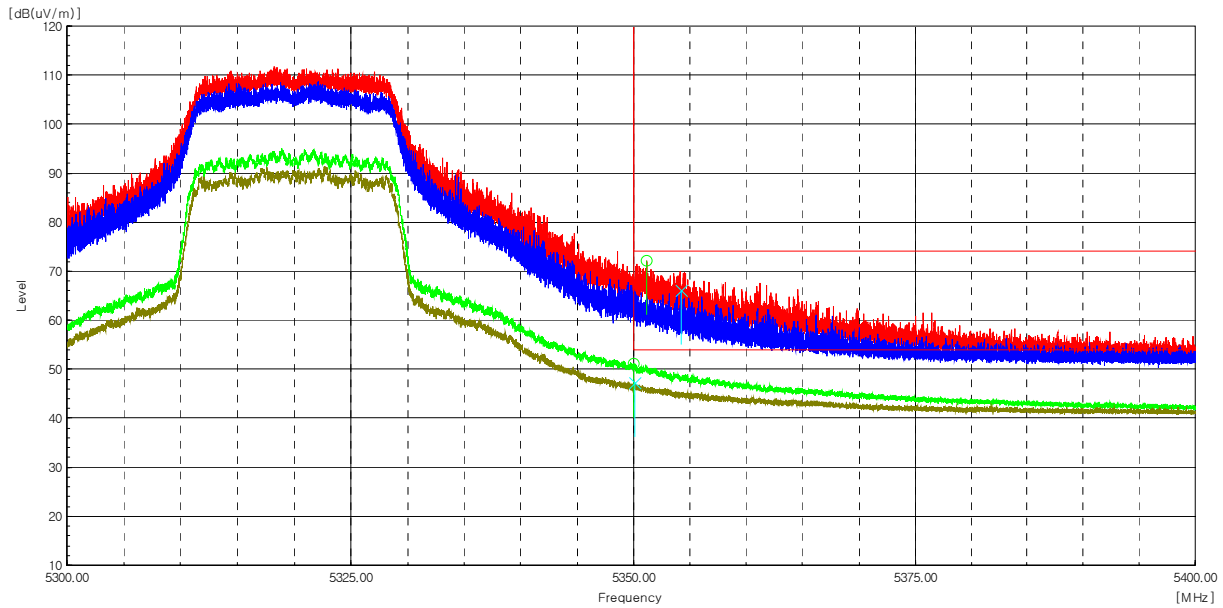

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
5 351.14	H	68.9	3.2	-----	72.1	-----	74.0	-----	1.9	-----	Peak
5 350.03	H	47.9	3.2	0.3	-----	51.4	-----	54.0	-----	2.6	Average
5 354.21	V	63.0	3.2	-----	66.2	-----	74.0	-----	7.8	-----	Peak
5 350.09	V	44.1	3.2	0.3	-----	47.6	-----	54.0	-----	6.4	Average

Radiated Restricted Band Edge Plot

Worst Case Mode :	802.11ac_VHT20
Worst Case Transfer Rate :	MNSS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 500 MHz
Channel :	100

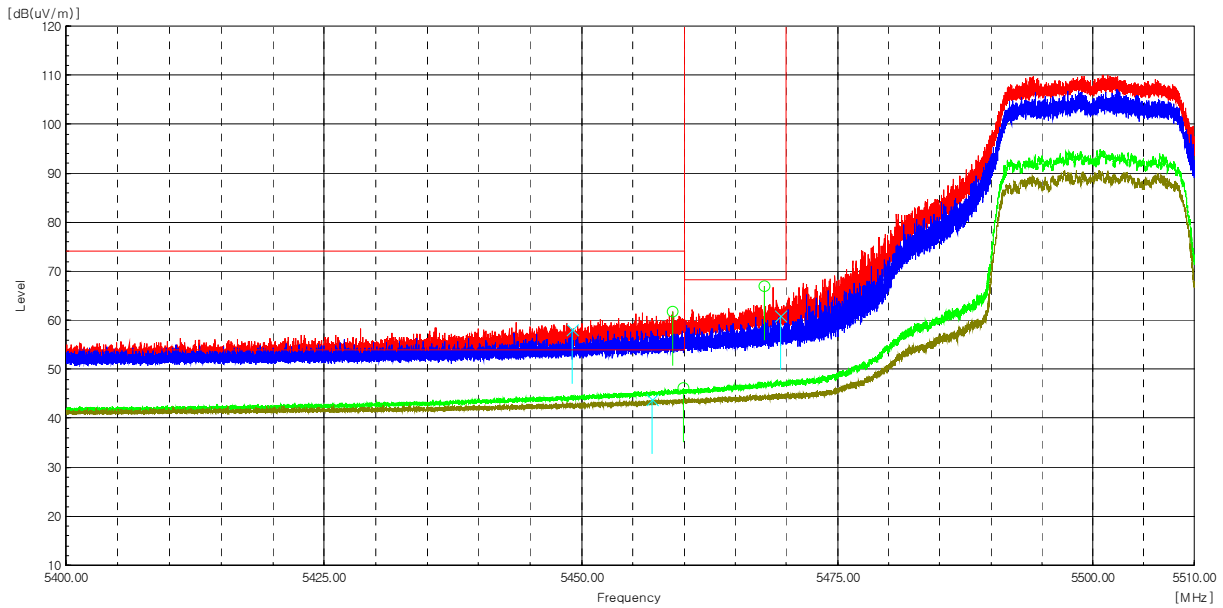

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
5 458.91	H	57.9	3.9	-----	61.8	-----	74.0	-----	12.2	-----	Peak
5 459.90	H	42.2	3.9	0.3	-----	46.4	-----	54.0	-----	7.6	Average
5 449.04	V	54.2	3.9	-----	58.1	-----	74.0	-----	15.9	-----	Peak
5 456.87	V	40.0	3.9	0.3	-----	44.2	-----	54.0	-----	9.8	Average
5 467.82	H	63.1	3.9	-----	67.0	-----	68.2	-----	1.2	-----	Peak
5 469.39	V	57.0	3.9	-----	60.9	-----	68.2	-----	7.3	-----	Peak


Radiated Restricted Band Edge Plot



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2023-00951
 Page (481) / (659) Pages

Worst Case Mode :	802.11ac_VHT20
Worst Case Transfer Rate :	MNSS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 700 MHz
Channel :	140

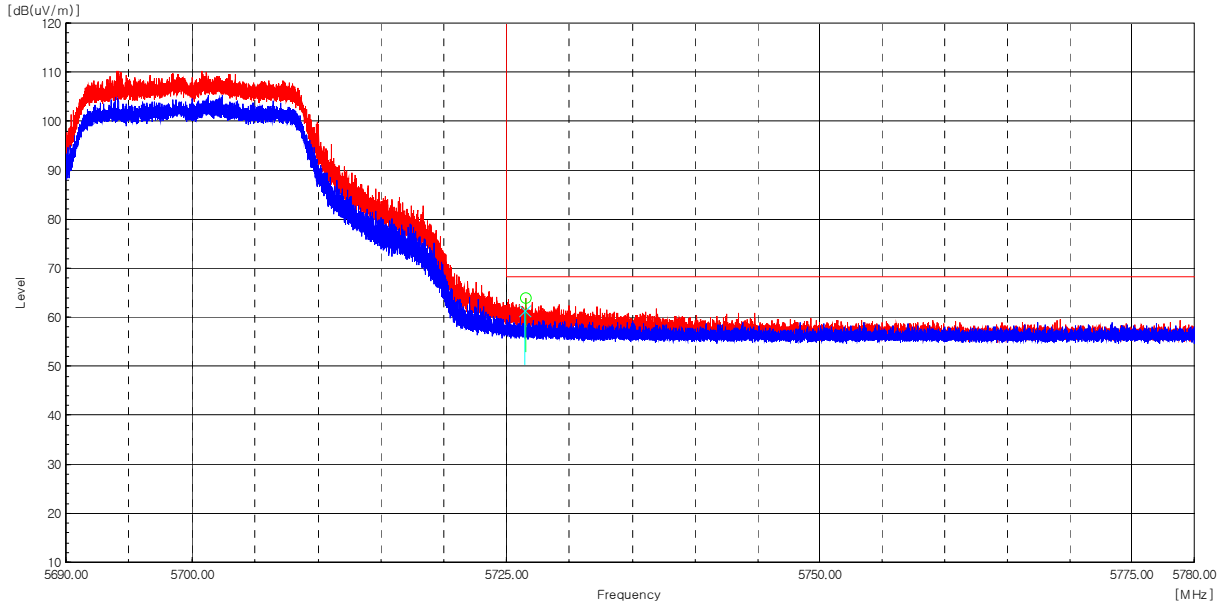

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
5 726.52	H	59.8	4.1	-----	63.9	-----	68.2	-----	4.3	-----	Peak
5 726.43	V	57.1	4.1	-----	61.2	-----	68.2	-----	7.0	-----	Peak


Radiated Restricted Band Edge Plot



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2023-00951
 Page (482) / (659) Pages


Worst Case Mode :	802.11ac_VHT20
Worst Case Transfer Rate :	MNSS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 745 MHz
Channel :	149

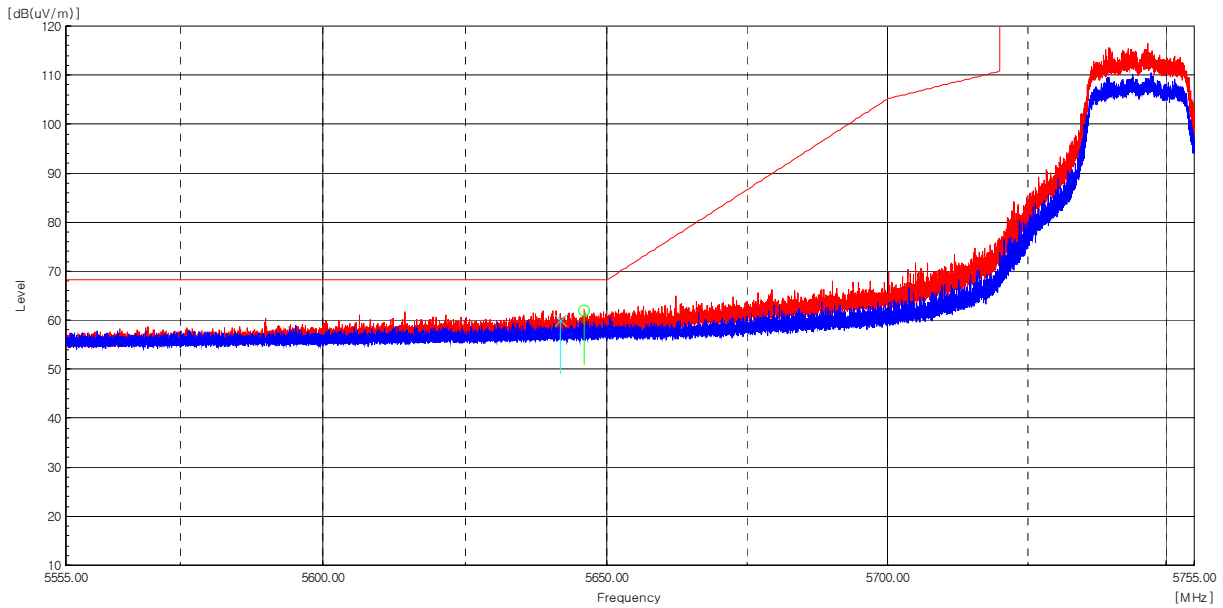

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
5 646.08	H	57.9	4.2	-----	62.1	-----	68.2	-----	6.1	-----	Peak
5 641.76	V	55.8	4.2	-----	60.0	-----	68.2	-----	8.2	-----	Peak

Radiated Restricted Band Edge Plot

Worst Case Mode :	802.11ac_VHT20
Worst Case Transfer Rate :	MNSS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 825 MHz
Channel :	165

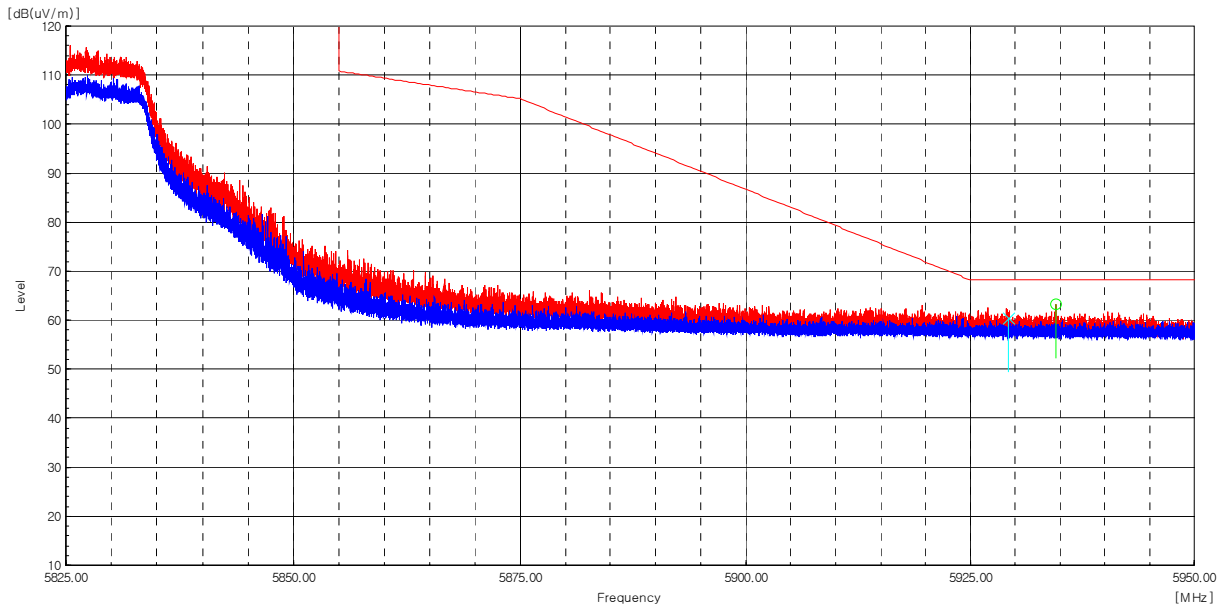

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
5 934.50	H	58.3	4.9	-----	63.2	-----	68.2	-----	5.0	-----	Peak
5 929.30	V	55.5	4.9	-----	60.4	-----	68.2	-----	7.8	-----	Peak


Radiated Restricted Band Edge Plot



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2023-00951
 Page (484) / (659) Pages


Worst Case Mode :	802.11ac_VHT20
Worst Case Transfer Rate :	MNSS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 845 MHz
Channel :	165

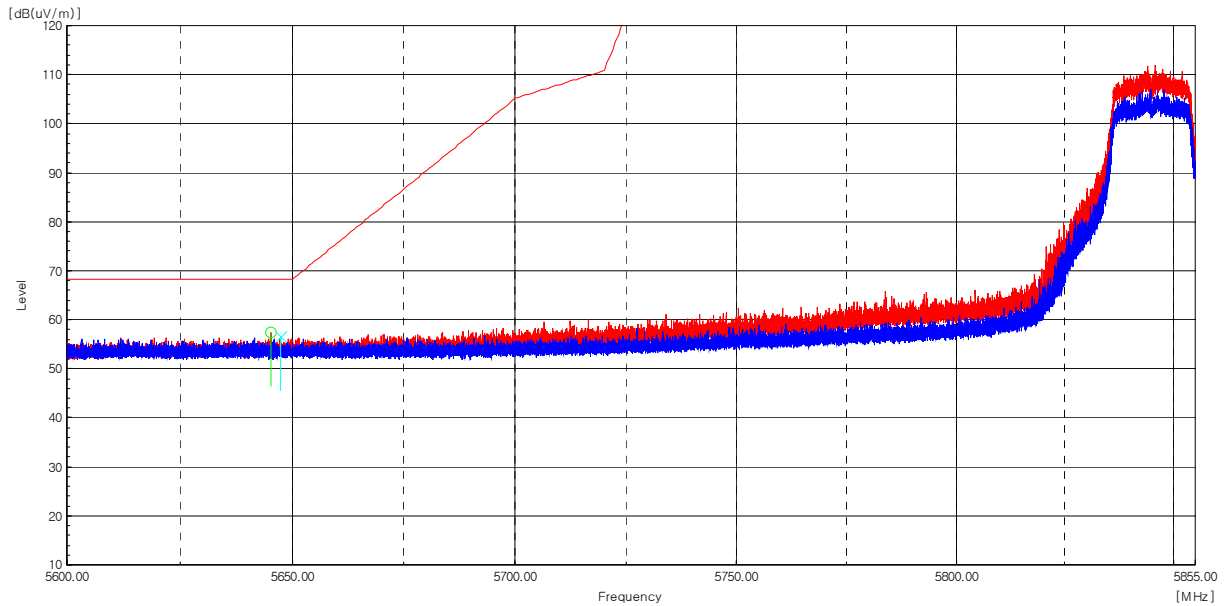

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
5 645.33	H	53.1	4.2	-----	57.3	-----	68.2	-----	10.9	-----	Peak
5 647.36	V	52.3	4.2	-----	56.5	-----	68.2	-----	11.7	-----	Peak

Radiated Restricted Band Edge Plot

Worst Case Mode :	802.11ac_VHT20
Worst Case Transfer Rate :	MNSS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 885 MHz
Channel :	177

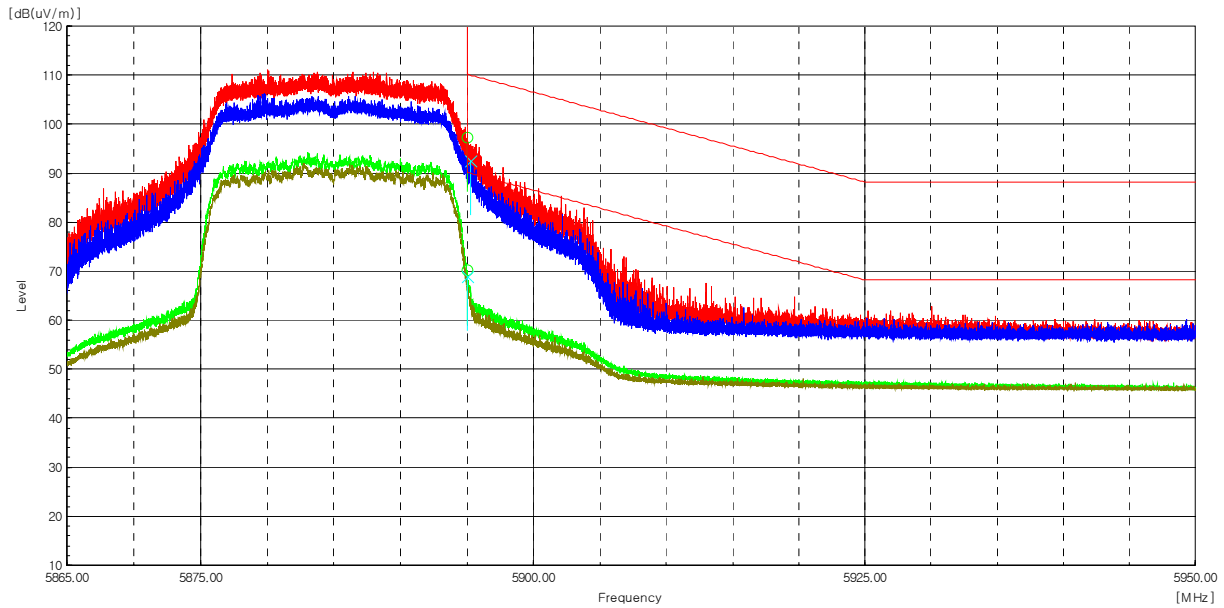

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
5 895.06	H	92.5	4.8	-----	97.3	-----	110.2	-----	12.9	-----	Peak
5 895.01	H	65.3	4.8	0.3	-----	70.4	-----	90.2	-----	19.8	Average
5 895.27	V	87.7	4.8	-----	92.5	-----	110.0	-----	17.5	-----	Peak
5 895.01	V	64.2	4.8	0.3	-----	69.3	-----	90.2	-----	20.9	Average

Radiated Restricted Band Edge Plot



Test mode : Transmitter, 802.11ax_HE20_26T

The requirements are:

Complies

Test Data

Ch.36(5 180 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
10 376.05	H	49.7	11.3	-----	61.0	-----	68.2	-----	7.2	-----	Peak
10 379.34	V	46.3	11.3	-----	57.6	-----	68.2	-----	10.6	-----	Peak

Ch.40(5 200 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
10 417.40	H	49.3	11.4	-----	60.7	-----	68.2	-----	7.5	-----	Peak
10 416.30	V	48.4	11.4	-----	59.8	-----	68.2	-----	8.4	-----	Peak

Ch.48(5 240 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
10 496.36	H	48.9	11.7	-----	60.6	-----	68.2	-----	7.6	-----	Peak
10 496.29	V	46.2	11.7	-----	57.9	-----	68.2	-----	10.3	-----	Peak

Ch.52(5 260 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
10 536.80	H	53.8	11.7	-----	65.5	-----	68.2	-----	2.7	-----	Peak
10 537.00	V	51.0	11.7	-----	62.7	-----	68.2	-----	5.5	-----	Peak

Ch.60(5 300 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
10 618.21	H	52.8	11.7	-----	64.5	-----	74.0	-----	9.5	-----	Peak
10 616.53	H	34.5	11.7	0.2	-----	46.4	-----	54.0	-----	7.6	Average
10 616.08	V	47.6	11.7	-----	59.3	-----	74.0	-----	14.7	-----	Peak
10 616.73	V	33.1	11.7	0.2	-----	45.0	-----	54.0	-----	9.0	Average

Ch.64(5 320 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
10 657.36	H	51.6	11.7	-----	63.3	-----	74.0	-----	10.7	-----	Peak
10 656.72	H	34.4	11.7	0.2	-----	46.3	-----	54.0	-----	7.7	Average
10 657.62	V	47.6	11.7	-----	59.3	-----	74.0	-----	14.7	-----	Peak
10 656.98	V	33.0	11.7	0.2	-----	44.9	-----	54.0	-----	9.1	Average

Ch.100(5 500 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
11 017.37	H	46.5	12.1	-----	58.6	-----	74.0	-----	15.4	-----	Peak
11 016.73	H	33.2	12.1	0.2	-----	45.5	-----	54.0	-----	8.5	Average
11 016.54	V	46.6	12.1	-----	58.7	-----	74.0	-----	15.3	-----	Peak
11 019.50	V	32.8	12.1	0.2	-----	45.1	-----	54.0	-----	8.9	Average

Ch.120(5 600 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
11 216.25	H	52.8	12.8	-----	65.6	-----	74.0	-----	8.4	-----	Peak
11 216.76	H	35.1	12.8	0.2	-----	48.1	-----	54.0	-----	5.9	Average
11 216.44	V	48.7	12.8	-----	61.5	-----	74.0	-----	12.5	-----	Peak
11 216.64	V	33.5	12.8	0.2	-----	46.5	-----	54.0	-----	7.5	Average

Ch.140(5 700 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
11 416.86	H	52.6	12.8	-----	65.4	-----	74.0	-----	8.6	-----	Peak
11 416.93	H	34.4	12.8	0.2	-----	47.4	-----	54.0	-----	6.6	Average
11 416.35	V	46.2	12.8	-----	59.0	-----	74.0	-----	15.0	-----	Peak
11 416.99	V	32.9	12.8	0.2	-----	45.9	-----	54.0	-----	8.1	Average

Ch.144(5 720 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
11 458.08	H	50.3	12.8	-----	63.1	-----	74.0	-----	10.9	-----	Peak
11 457.31	H	34.1	12.8	0.2	-----	47.1	-----	54.0	-----	6.9	Average
11 457.37	V	45.9	12.8	-----	58.7	-----	74.0	-----	15.3	-----	Peak
11 457.18	V	32.8	12.8	0.2	-----	45.8	-----	54.0	-----	8.2	Average

Ch.149(5 745 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
11 506.38	H	53.9	12.6	-----	66.5	-----	74.0	-----	7.5	-----	Peak
11 507.22	H	35.8	12.6	0.2	-----	48.6	-----	54.0	-----	5.4	Average
11 507.93	V	48.5	12.6	-----	61.1	-----	74.0	-----	12.9	-----	Peak
11 507.22	V	33.8	12.6	0.2	-----	46.6	-----	54.0	-----	7.4	Average

Ch.157(5 785 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
11 586.89	H	52.2	13.0	-----	65.2	-----	74.0	-----	8.8	-----	Peak
11 586.89	H	35.4	13.0	0.2	-----	48.6	-----	54.0	-----	5.4	Average
11 587.27	V	47.8	13.0	-----	60.8	-----	74.0	-----	13.2	-----	Peak
11 586.95	V	33.2	13.0	0.2	-----	46.4	-----	54.0	-----	7.6	Average

Ch.165(5 825 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
11 667.07	H	50.9	12.7	-----	63.6	-----	74.0	-----	10.4	-----	Peak
11 666.36	H	35.4	12.7	0.2	-----	48.3	-----	54.0	-----	5.7	Average
11 667.20	V	48.5	12.7	-----	61.2	-----	74.0	-----	12.8	-----	Peak
11 667.07	V	33.3	12.7	0.2	-----	46.2	-----	54.0	-----	7.8	Average

Ch.169(5 845 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
11 707.58	H	50.6	12.6	-----	63.2	-----	74.0	-----	10.8	-----	Peak
11 707.19	H	33.6	12.6	0.2	-----	46.4	-----	54.0	-----	7.6	Average
11 706.93	V	46.1	12.6	-----	58.7	-----	74.0	-----	15.3	-----	Peak
11 707.25	V	33.1	12.6	0.2	-----	45.9	-----	54.0	-----	8.1	Average

Ch.173(5 865 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
11 745.96	H	51.4	12.7	-----	64.1	-----	74.0	-----	9.9	-----	Peak
11 747.05	H	34.0	12.7	0.2	-----	46.9	-----	54.0	-----	7.1	Average
11 747.44	V	45.6	12.7	-----	58.3	-----	74.0	-----	15.7	-----	Peak
11 746.61	V	33.0	12.7	0.2	-----	45.9	-----	54.0	-----	8.1	Average

Ch.177(5 885 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
11 787.82	H	52.3	12.9	-----	65.2	-----	74.0	-----	8.8	-----	Peak
11 786.92	H	34.2	12.9	0.2	-----	47.3	-----	54.0	-----	6.7	Average
11 786.21	V	47.7	12.9	-----	60.6	-----	74.0	-----	13.4	-----	Peak
11 787.57	V	33.6	12.9	0.2	-----	46.7	-----	54.0	-----	7.3	Average

Remarks


1. The unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down positon(X,Y axis). The worst emission was found in lie-down positon(X axis) and the worst case was recorded.
2. Peak Result = Reading + c.f(Correction factor)
Average Result = Reading + c.f(Correction factor) + Duty Cycle Factor
3. Correction factor = Antenna factor + Cable loss - Amp Gain



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2023-00951
 Page (490) / (659) Pages

Worst Case Mode :	802.11ax_HE20_26T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 180 MHz
Channel :	36

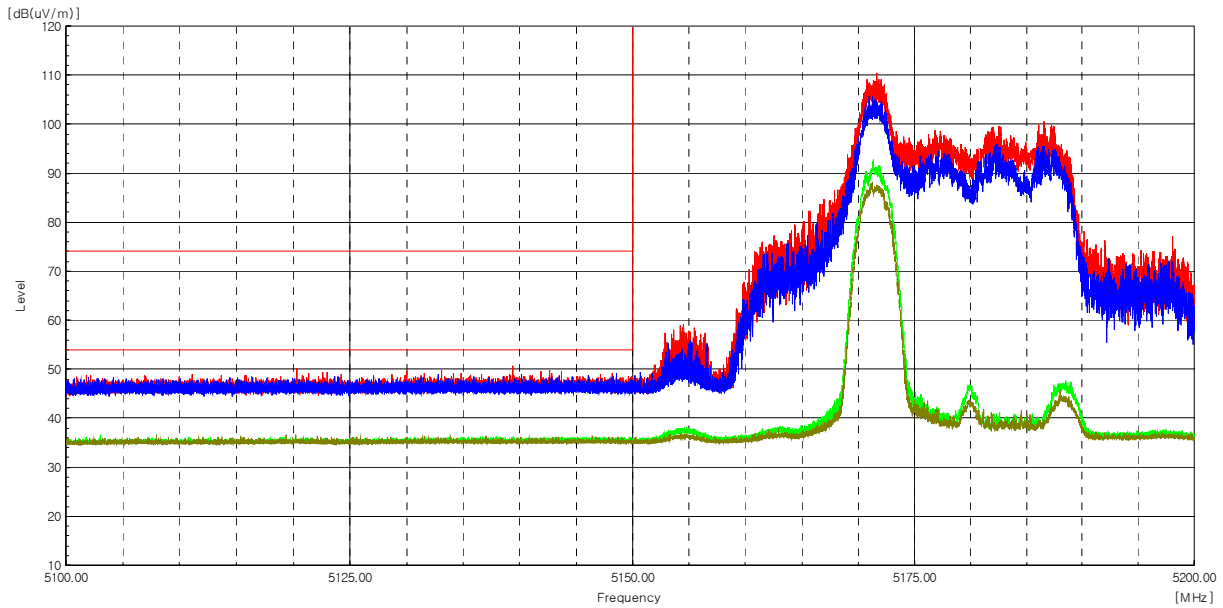

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
-----------------	-----	----------------	---------------	------------------------	---------------------	---------------------	---------------------	---------------------	----------------	----------------	------

The emissions above 1 GHz were 20 dB lower than the limit.


Radiated Restricted Band Edge Plot



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2023-00951
 Page (491) / (659) Pages

Worst Case Mode :	802.11ax_HE20_26T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 320 MHz
Channel :	64

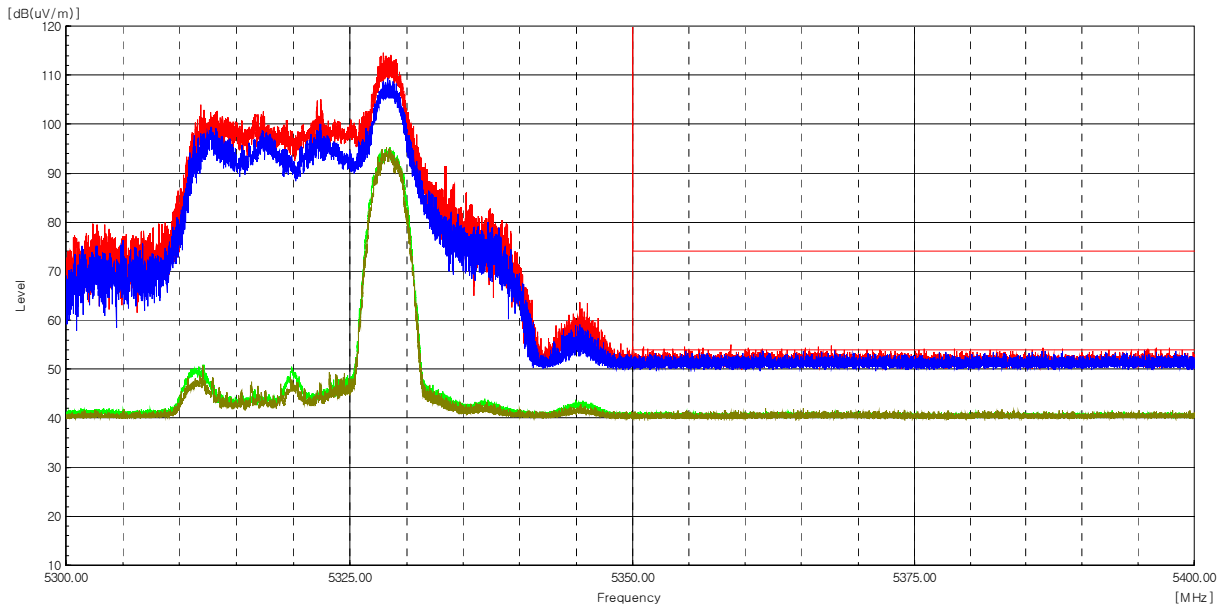

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
-----------------	-----	----------------	---------------	------------------------	---------------------	---------------------	---------------------	---------------------	----------------	----------------	------

The emissions above 1 GHz were 20 dB lower than the limit.


Radiated Restricted Band Edge Plot



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2023-00951
 Page (492) / (659) Pages

Worst Case Mode :	802.11ax_HE20_26T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 500 MHz
Channel :	100

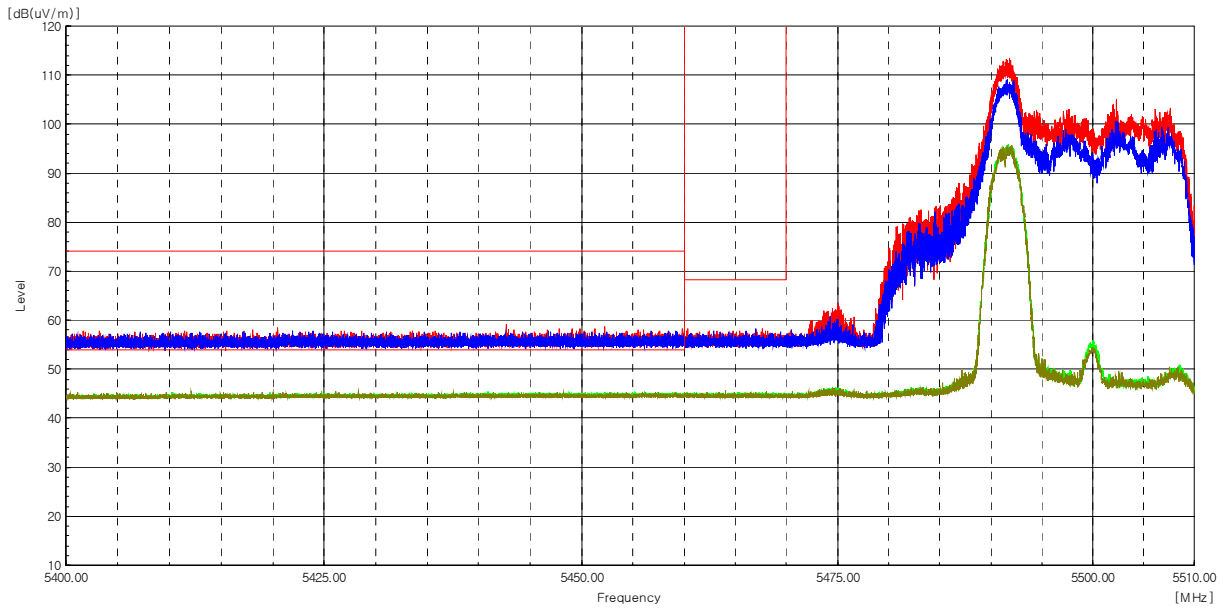


Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
-----------------	-----	----------------	---------------	------------------------	---------------------	---------------------	---------------------	---------------------	----------------	----------------	------

The emissions above 1 GHz were 20 dB lower than the limit.

Radiated Restricted Band Edge Plot

Worst Case Mode :	802.11ax_HE20_26T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 700 MHz
Channel :	140

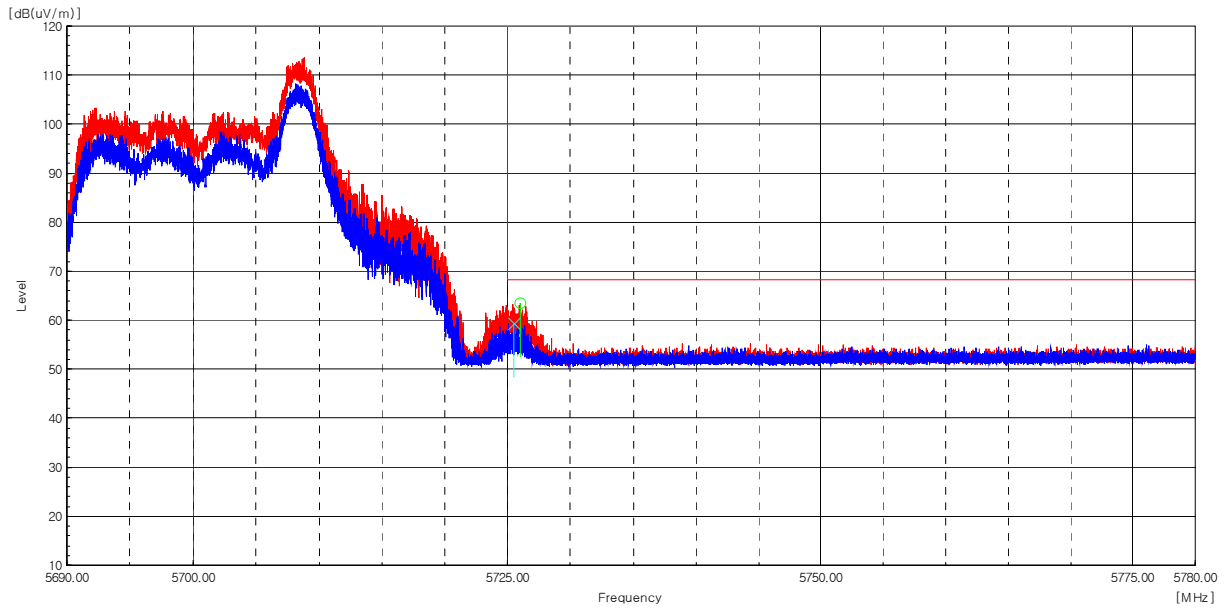

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
5 725.97	H	59.4	4.1	-----	63.5	-----	68.2	-----	4.7	-----	Peak
5 725.49	V	55.2	4.1	-----	59.3	-----	68.2	-----	8.9	-----	Peak


Radiated Restricted Band Edge Plot



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2023-00951
 Page (494) / (659) Pages

Worst Case Mode :	802.11ax_HE20_26T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 745 MHz
Channel :	149

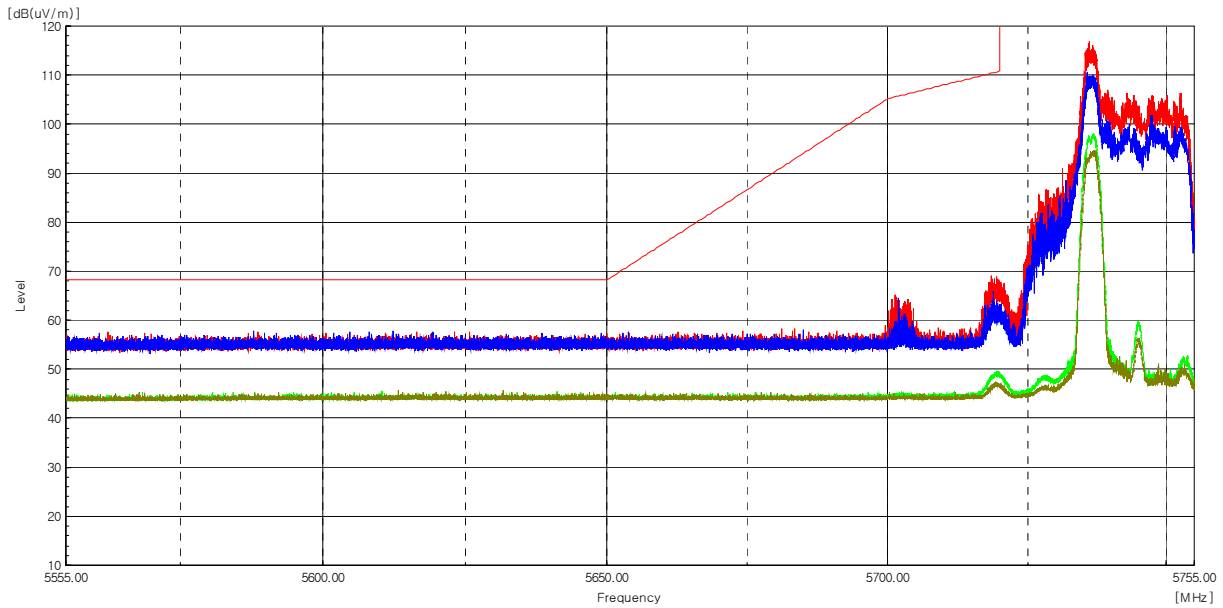

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
-----------------	-----	----------------	---------------	------------------------	---------------------	---------------------	---------------------	---------------------	----------------	----------------	------

The emissions above 1 GHz were 20 dB lower than the limit.


Radiated Restricted Band Edge Plot



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2023-00951
 Page (495) / (659) Pages

Worst Case Mode :	802.11ax_HE20_26T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 825 MHz
Channel :	165

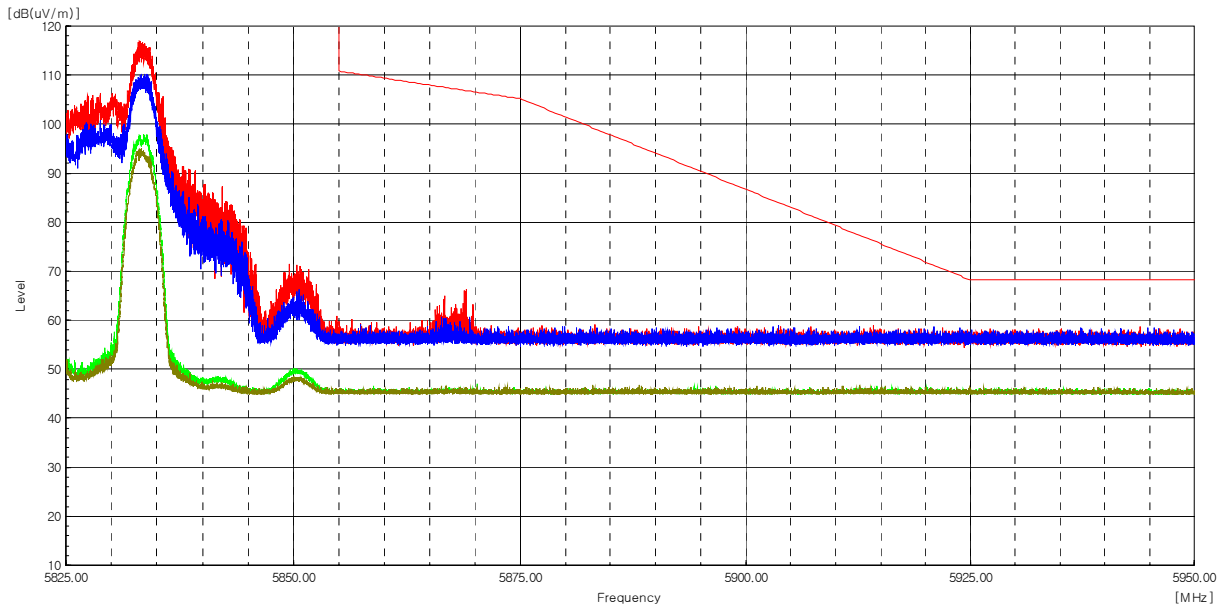

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
-----------------	-----	----------------	---------------	------------------------	---------------------	---------------------	---------------------	---------------------	----------------	----------------	------

The emissions above 1 GHz were 20 dB lower than the limit.


Radiated Restricted Band Edge Plot



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2023-00951
 Page (496) / (659) Pages

Worst Case Mode :	802.11ax_HE20_26T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 845 MHz
Channel :	165

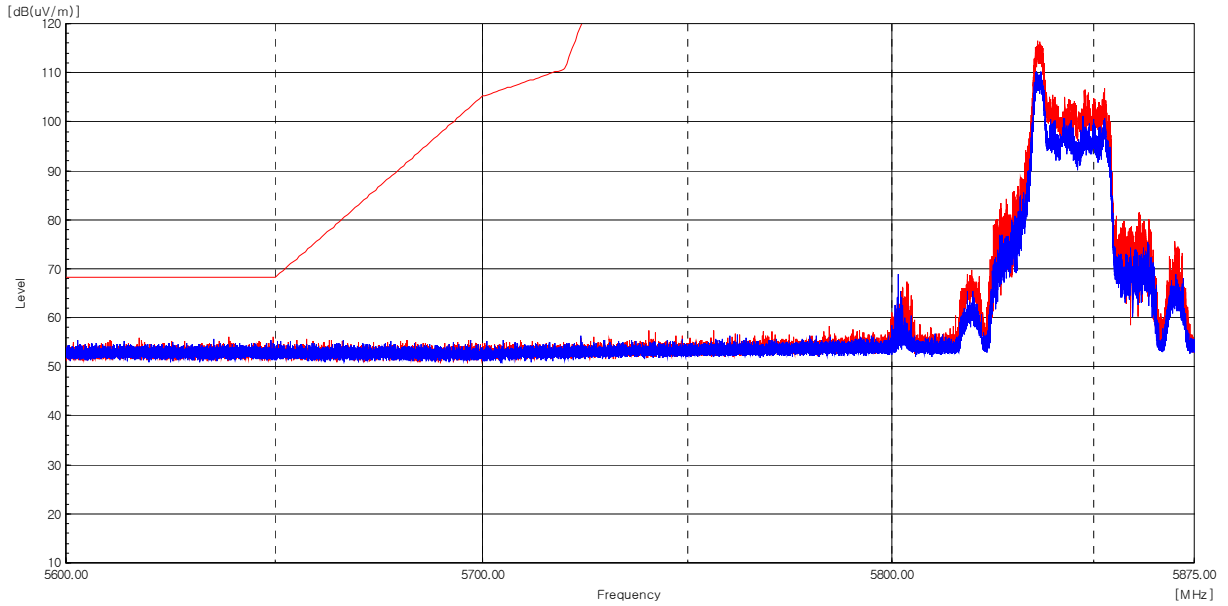


Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
-----------------	-----	----------------	---------------	------------------------	---------------------	---------------------	---------------------	---------------------	----------------	----------------	------

The emissions above 1 GHz were 20 dB lower than the limit.

Radiated Restricted Band Edge Plot

Worst Case Mode :	802.11ax_HE20_26T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 885 MHz
Channel :	177

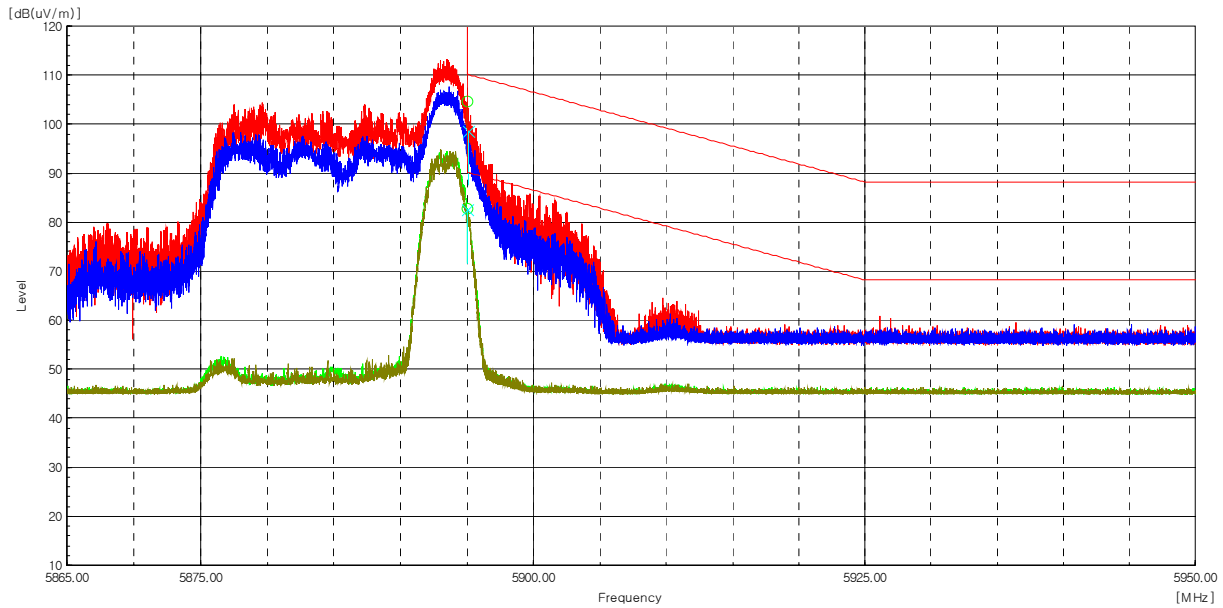

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
5 895.01	H	99.8	4.8	-----	104.6	-----	110.2	-----	5.6	-----	Peak
5 895.01	H	78.0	4.8	0.2	-----	83.0	-----	90.2	-----	7.2	Average
5 895.13	V	93.8	4.8	-----	98.6	-----	110.1	-----	11.5	-----	Peak
5 895.01	V	77.7	4.8	0.2	-----	82.7	-----	90.2	-----	7.5	Average

Radiated Restricted Band Edge Plot


Test mode : Transmitter, 802.11ax_HE20_52T

The requirements are:

Complies

Test Data

Worst Case Mode :	802.11ax_HE20_52T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 180 MHz
Channel :	36

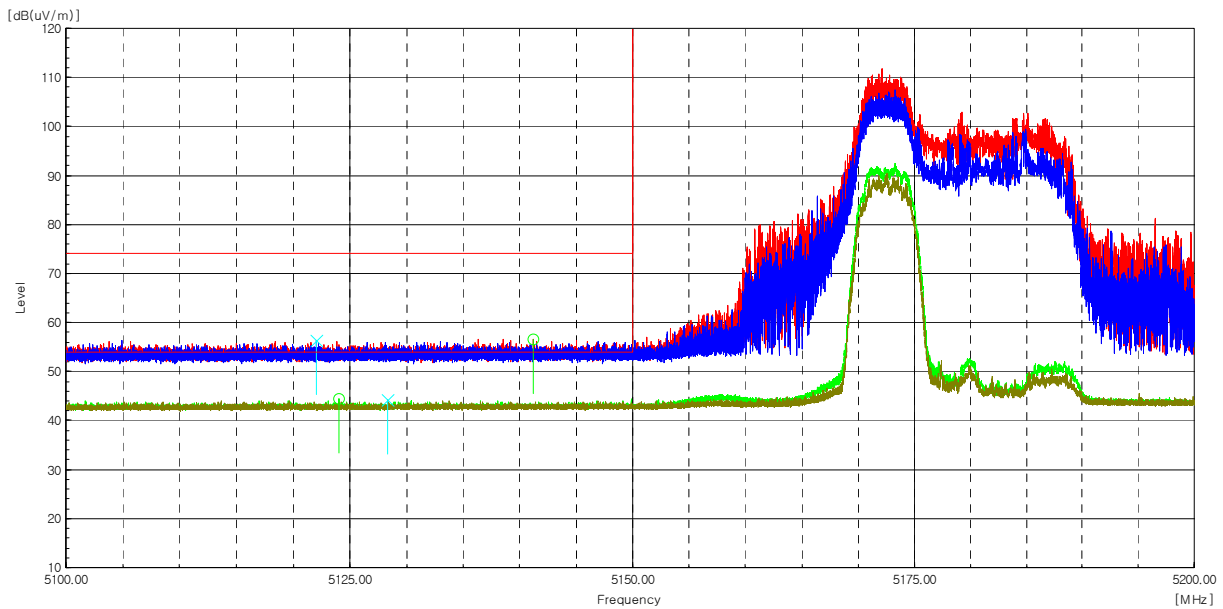

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
-----------------	-----	----------------	---------------	------------------------	---------------------	---------------------	---------------------	---------------------	----------------	----------------	------

The emissions above 1 GHz were 20 dB lower than the limit.


Radiated Restricted Band Edge Plot



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2023-00951
 Page (499) / (659) Pages

Worst Case Mode :	802.11ax_HE20_52T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 320 MHz
Channel :	64

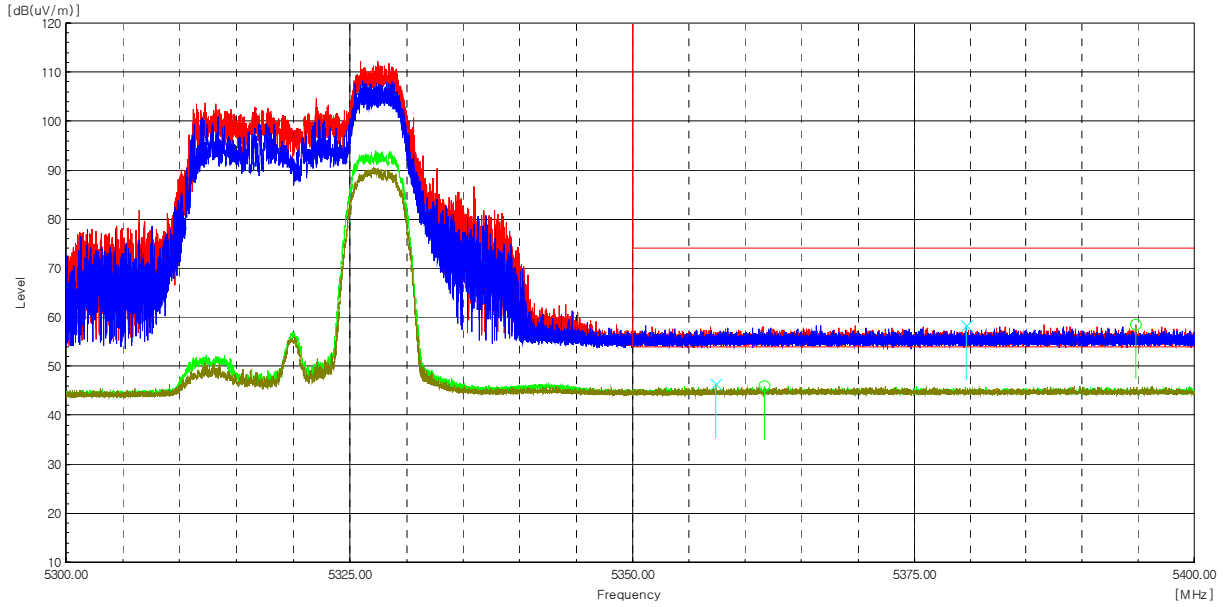

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
-----------------	-----	----------------	---------------	------------------------	---------------------	---------------------	---------------------	---------------------	----------------	----------------	------

The emissions above 1 GHz were 20 dB lower than the limit.


Radiated Restricted Band Edge Plot



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2023-00951
 Page (500) / (659) Pages

Worst Case Mode :	802.11ax_HE20_52T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 500 MHz
Channel :	100

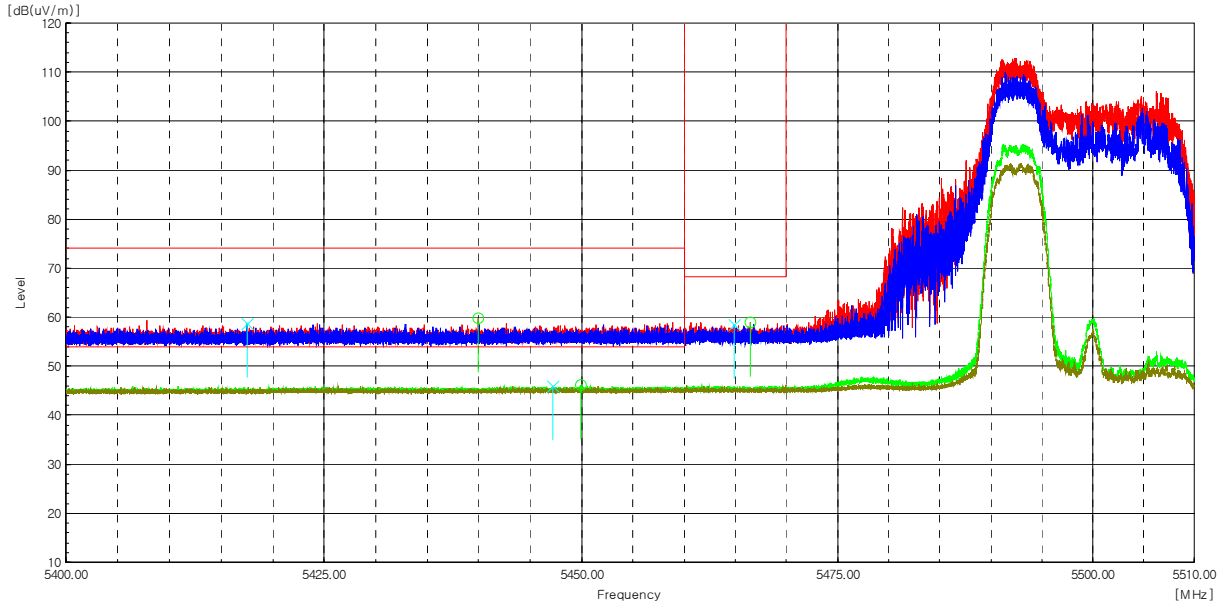


Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
-----------------	-----	----------------	---------------	------------------------	---------------------	---------------------	---------------------	---------------------	----------------	----------------	------

The emissions above 1 GHz were 20 dB lower than the limit.

Radiated Restricted Band Edge Plot

Worst Case Mode :	802.11ax_HE20_52T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 700 MHz
Channel :	140

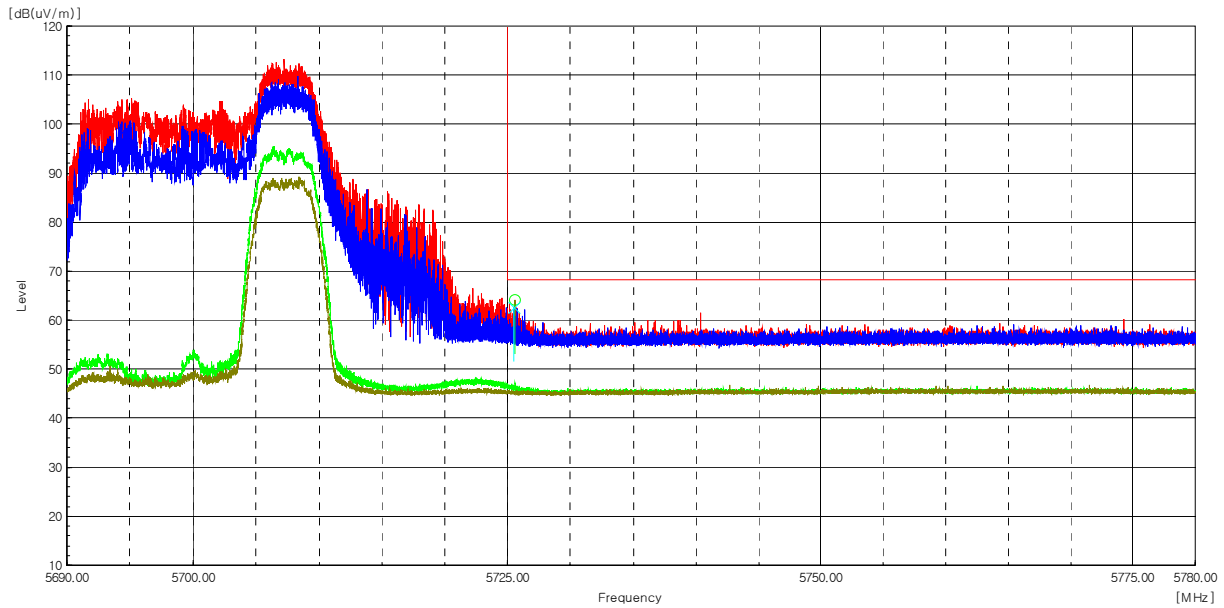

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
5 725.61	H	59.9	4.2	-----	64.1	-----	68.2	-----	4.1	-----	Peak
5 725.49	V	58.5	4.2	-----	62.7	-----	68.2	-----	5.5	-----	Peak


Radiated Restricted Band Edge Plot



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2023-00951
 Page (502) / (659) Pages

Worst Case Mode :	802.11ax_HE20_52T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 745 MHz
Channel :	149

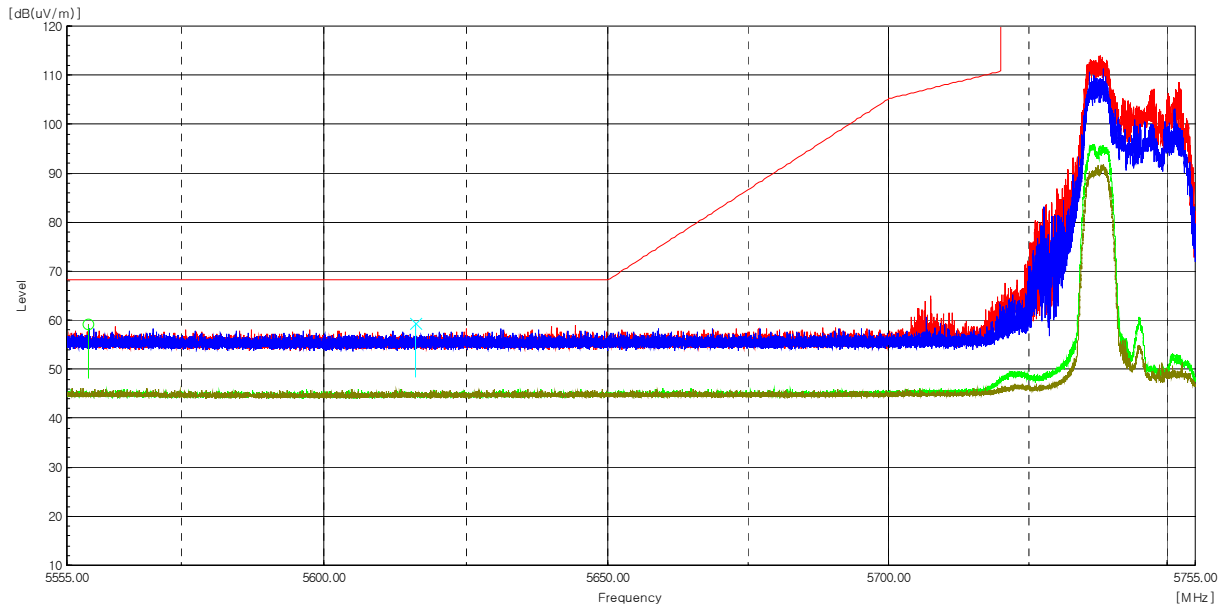


Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
-----------------	-----	----------------	---------------	------------------------	---------------------	---------------------	---------------------	---------------------	----------------	----------------	------

The emissions above 1 GHz were 20 dB lower than the limit.

Radiated Restricted Band Edge Plot

Worst Case Mode :	802.11ax_HE20_52T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 825 MHz
Channel :	165

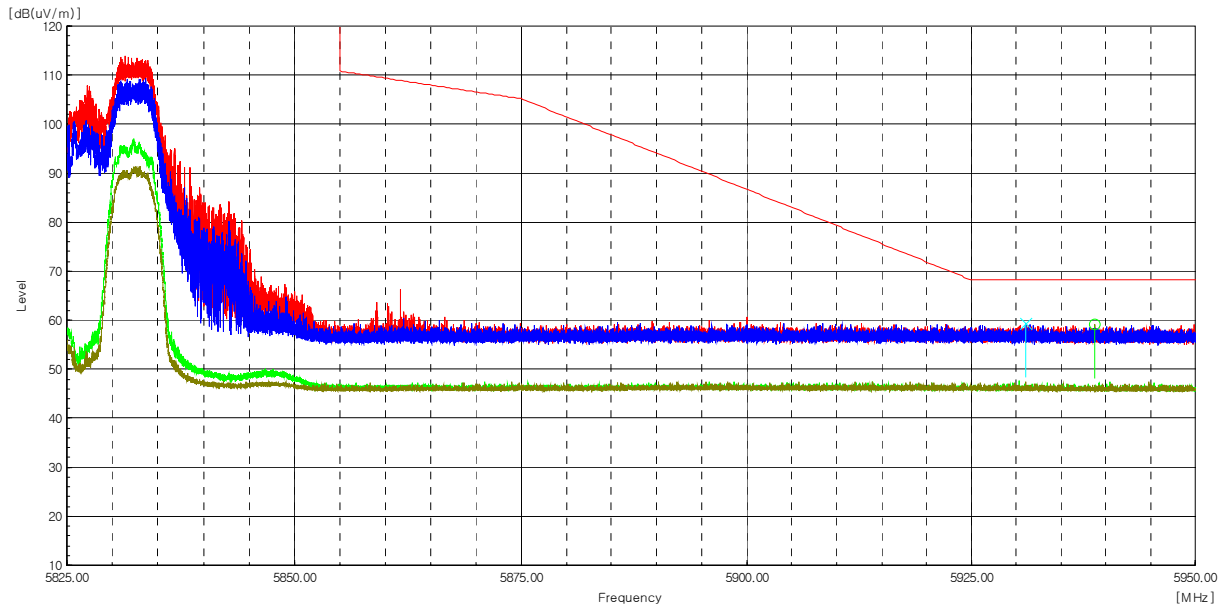

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
-----------------	-----	----------------	---------------	------------------------	---------------------	---------------------	---------------------	---------------------	----------------	----------------	------

The emissions above 1 GHz were 20 dB lower than the limit.


Radiated Restricted Band Edge Plot



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2023-00951
 Page (504) / (659) Pages

Worst Case Mode :	802.11ax_HE20_52T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 845 MHz
Channel :	165

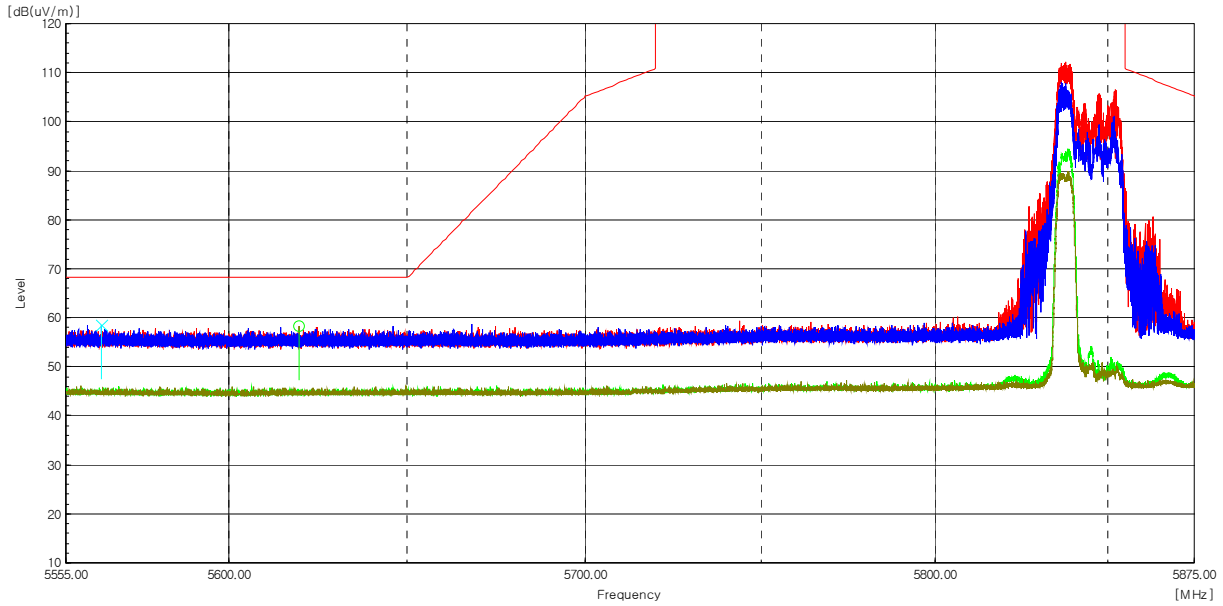


Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
-----------------	-----	----------------	---------------	------------------------	---------------------	---------------------	---------------------	---------------------	----------------	----------------	------

The emissions above 1 GHz were 20 dB lower than the limit.

Radiated Restricted Band Edge Plot

Worst Case Mode :	802.11ax_HE20_52T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 885 MHz
Channel :	177

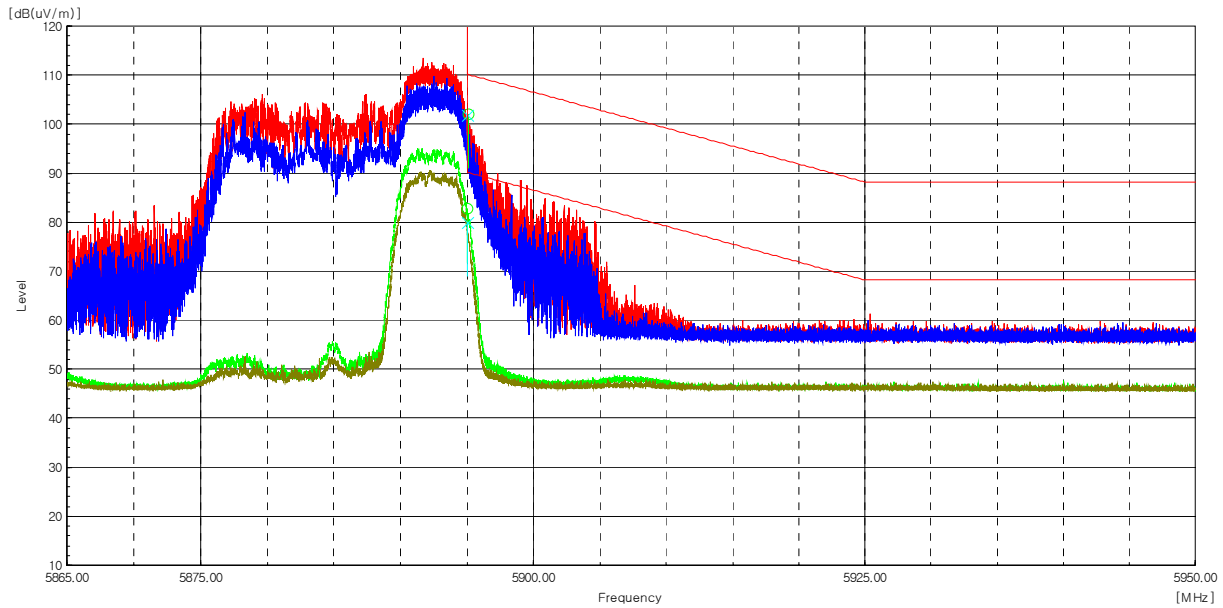

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
5 895.15	H	97.0	5.0	-----	102.0	-----	110.1	-----	8.1	-----	Peak
5 895.01	H	77.7	5.0	0.2	-----	82.9	-----	90.2	-----	7.3	Average
5 895.04	V	96.9	5.0	-----	101.9	-----	110.2	-----	8.3	-----	Peak
5 895.01	V	74.9	5.0	0.2	-----	80.1	-----	90.2	-----	10.1	Average

Radiated Restricted Band Edge Plot



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2023-00951
 Page (506) / (659) Pages


Test mode : Transmitter, 802.11ax_HE20_106T

The requirements are:

Complies

Test Data

Worst Case Mode :	802.11ax_HE20_106T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 180 MHz
Channel :	36

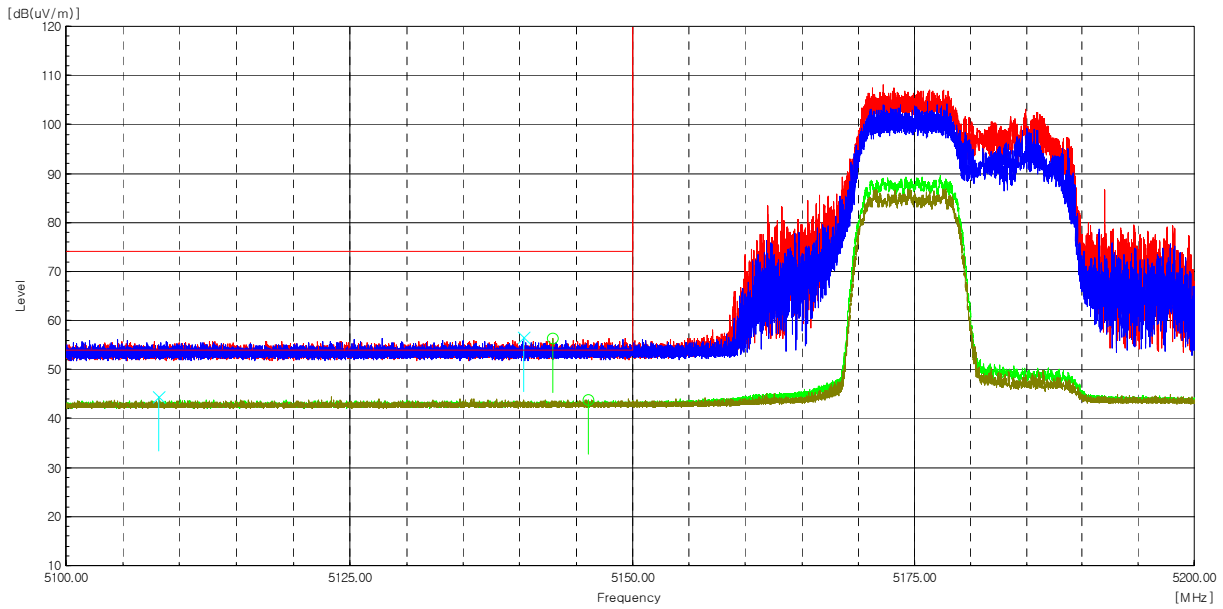

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
-----------------	-----	----------------	---------------	------------------------	---------------------	---------------------	---------------------	---------------------	----------------	----------------	------

The emissions above 1 GHz were 20 dB lower than the limit.


Radiated Restricted Band Edge Plot



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2023-00951
 Page (507) / (659) Pages

Worst Case Mode :	802.11ax_HE20_106T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 320 MHz
Channel :	64

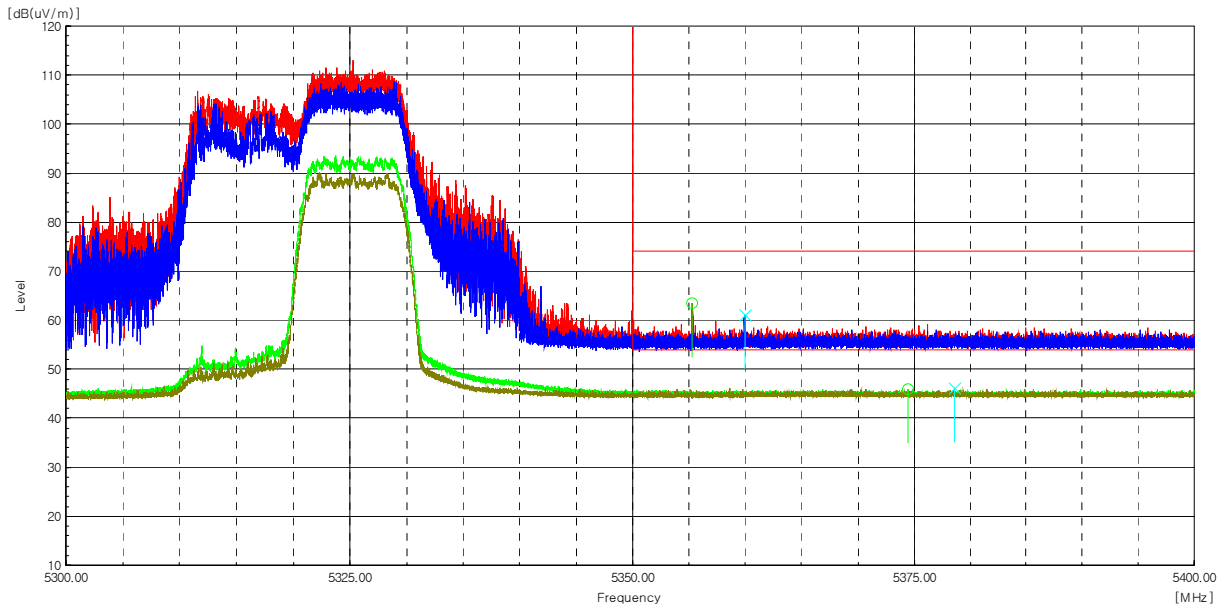


Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
-----------------	-----	----------------	---------------	------------------------	---------------------	---------------------	---------------------	---------------------	----------------	----------------	------

The emissions above 1 GHz were 20 dB lower than the limit.

Radiated Restricted Band Edge Plot


Worst Case Mode :	802.11ax_HE20_106T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 500 MHz
Channel :	100

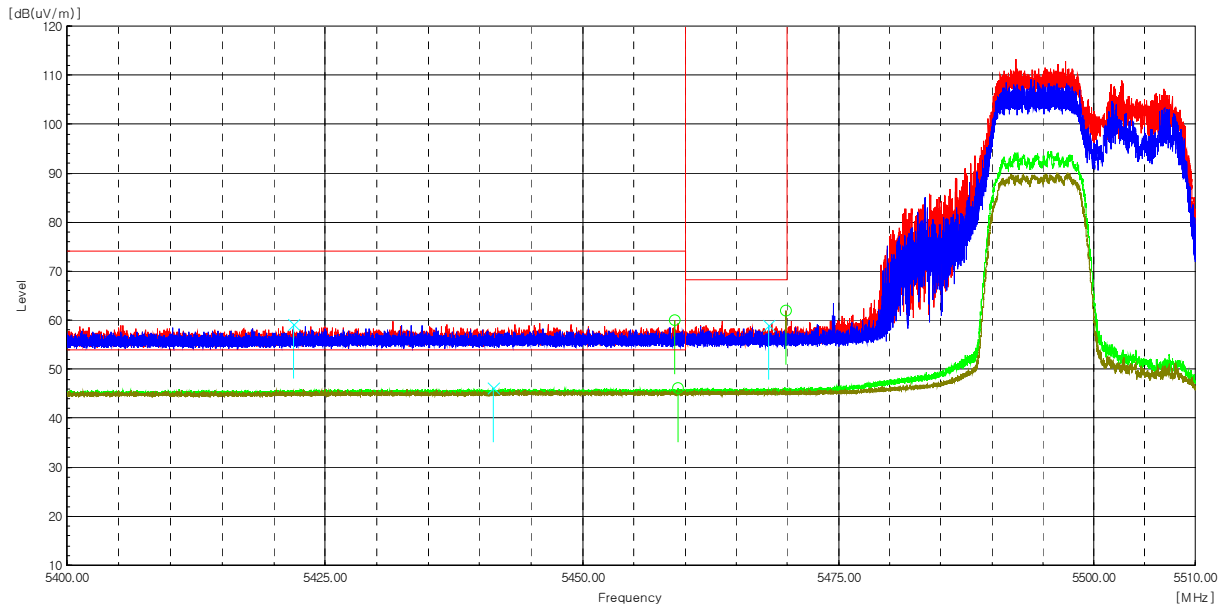

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
5 469.86	H	58.2	3.7	-----	61.9	-----	68.2	-----	6.3	-----	Peak

Radiated Restricted Band Edge Plot

Worst Case Mode :	802.11ax_HE20_106T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 700 MHz
Channel :	140

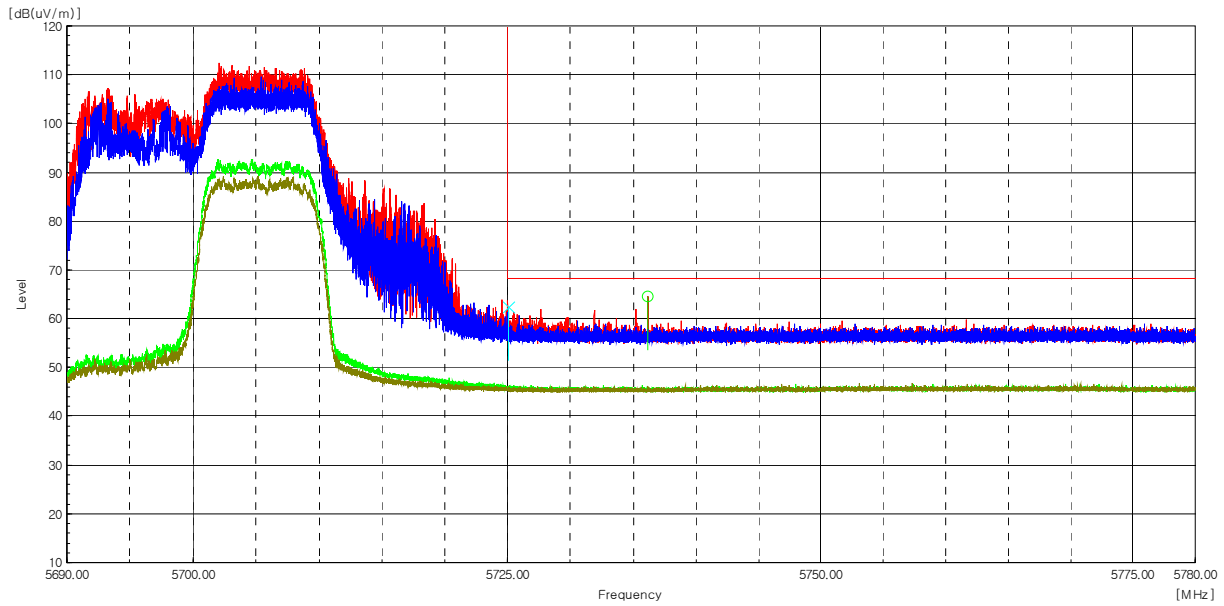

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
5 736.20	H	60.3	4.3	-----	64.6	-----	68.2	-----	3.6	-----	Peak
5 725.07	V	58.2	4.2	-----	62.4	-----	68.2	-----	5.8	-----	Peak


Radiated Restricted Band Edge Plot



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2023-00951
 Page (510) / (659) Pages

Worst Case Mode :	802.11ax_HE20_106T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 745 MHz
Channel :	149

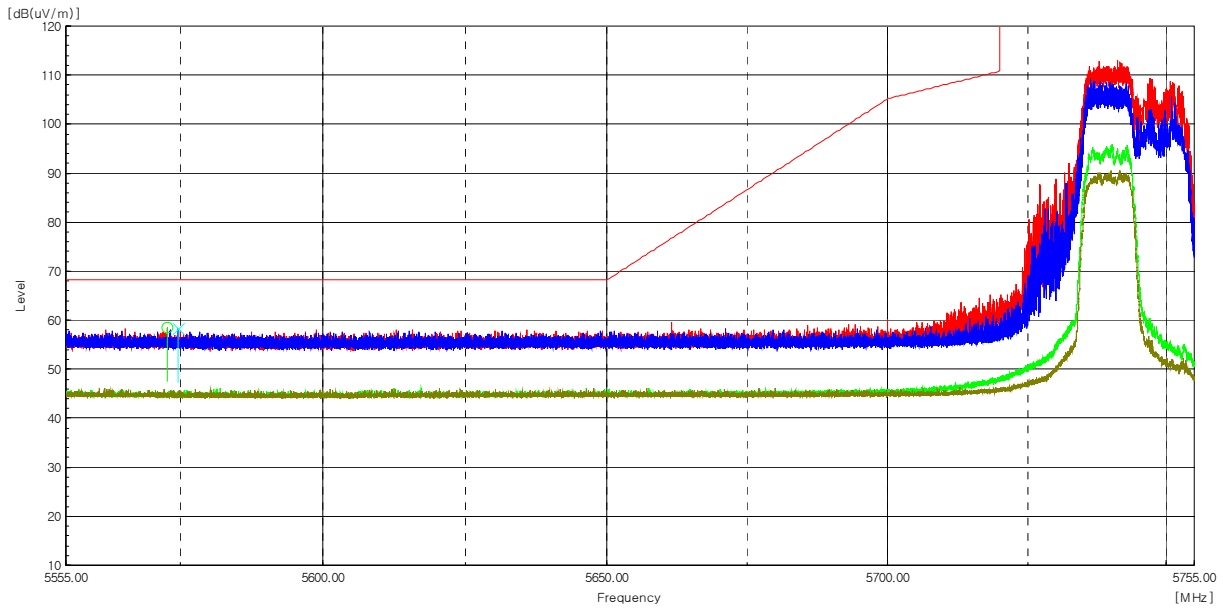


Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
-----------------	-----	----------------	---------------	------------------------	---------------------	---------------------	---------------------	---------------------	----------------	----------------	------

The emissions above 1 GHz were 20 dB lower than the limit.

Radiated Restricted Band Edge Plot

Worst Case Mode :	802.11ax_HE20_106T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 825 MHz
Channel :	165

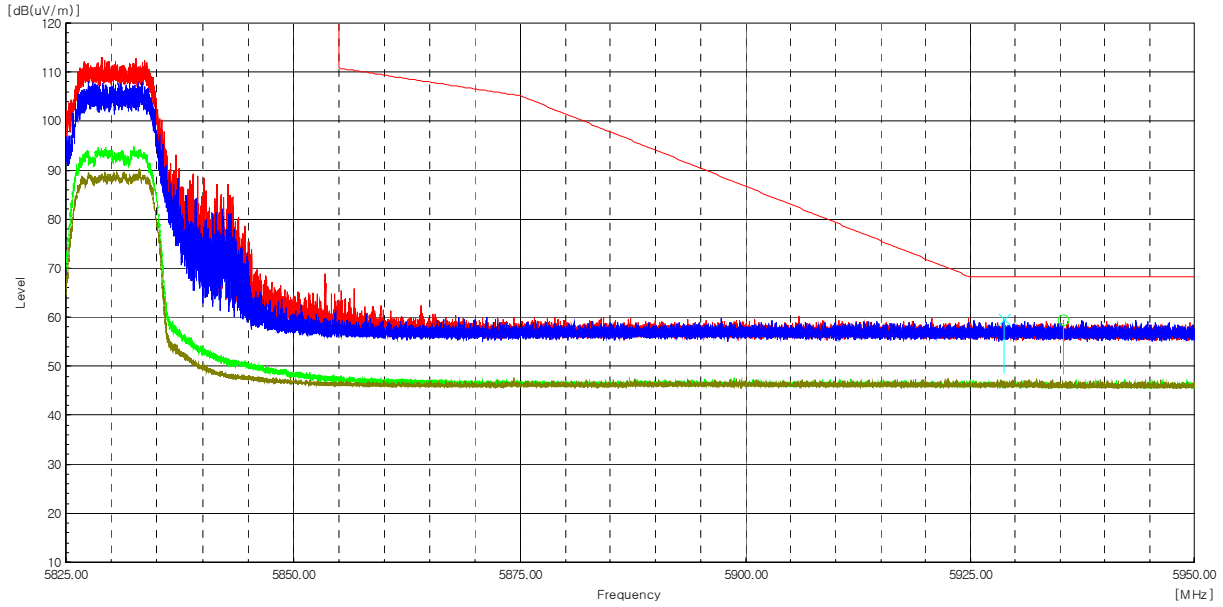

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
-----------------	-----	----------------	---------------	------------------------	---------------------	---------------------	---------------------	---------------------	----------------	----------------	------

The emissions above 1 GHz were 20 dB lower than the limit.


Radiated Restricted Band Edge Plot



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2023-00951
 Page (512) / (659) Pages

Worst Case Mode :	802.11ax_HE20_106T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 845 MHz
Channel :	165

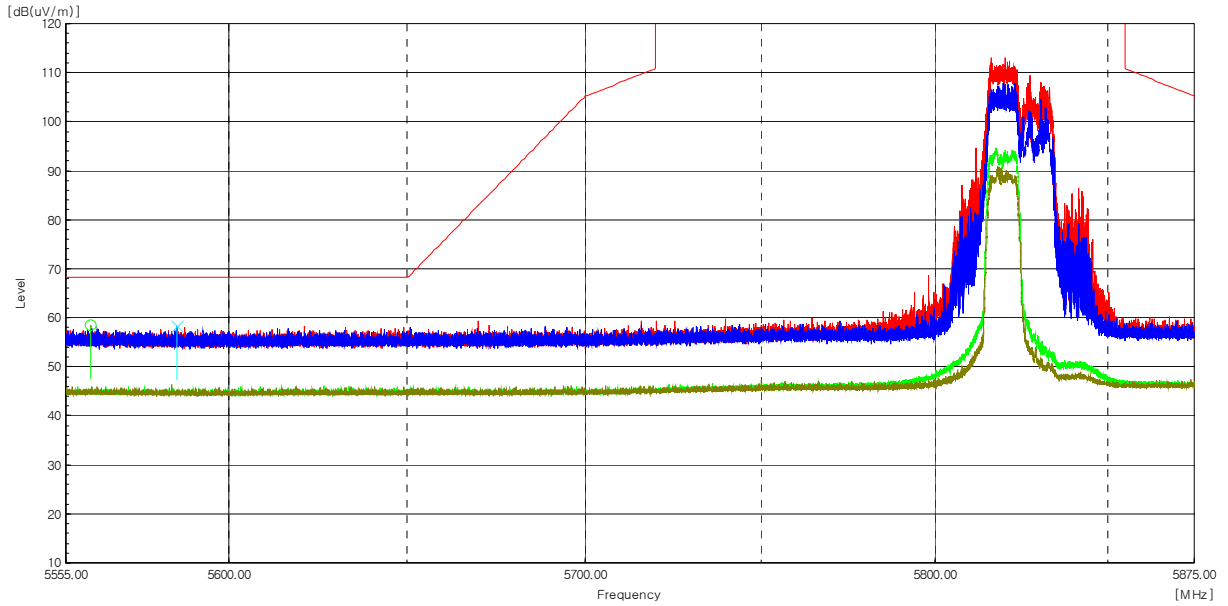


Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
-----------------	-----	----------------	---------------	------------------------	---------------------	---------------------	---------------------	---------------------	----------------	----------------	------

The emissions above 1 GHz were 20 dB lower than the limit.

Radiated Restricted Band Edge Plot

Worst Case Mode :	802.11ax_HE20_106T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 885 MHz
Channel :	177

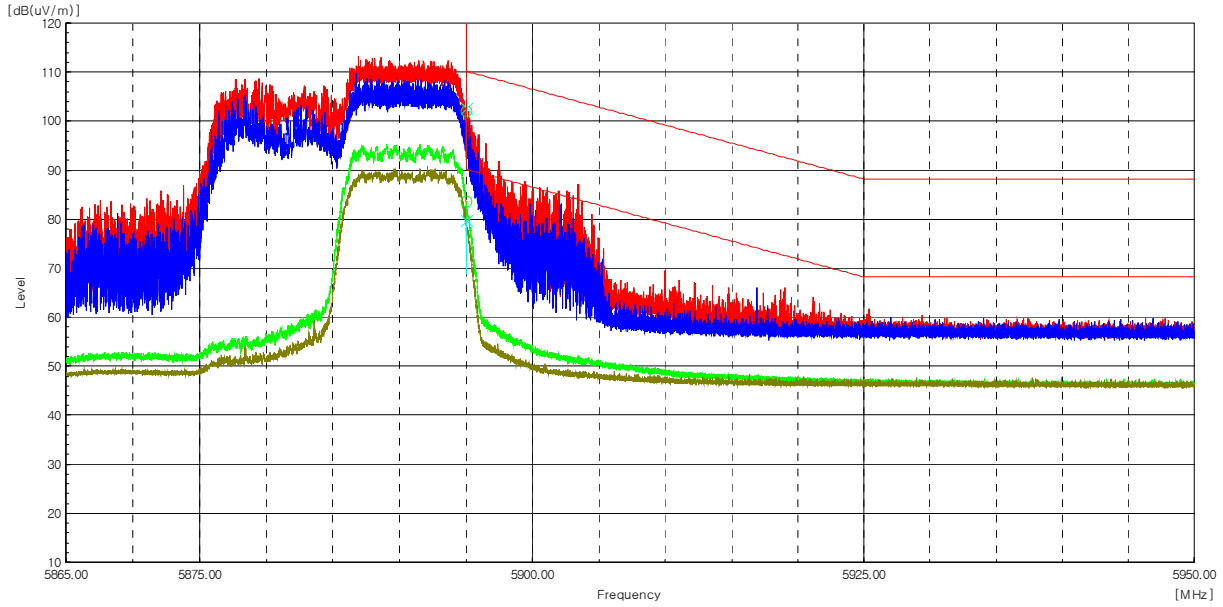

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
5 895.04	H	96.9	5.0	-----	101.9	-----	110.2	-----	8.3	-----	Peak
5 895.00	H	78.7	5.0	0.2	-----	83.9	-----	90.2	-----	6.3	Average
5 895.02	V	97.6	5.0	-----	102.6	-----	110.2	-----	7.6	-----	Peak
5 895.00	V	74.7	5.0	0.2	-----	79.9	-----	90.2	-----	10.3	Average

Radiated Restricted Band Edge Plot



Test mode : Transmitter, 802.11ax_HE20_242T

The requirements are:

Complies

Test Data

Ch.36(5 180 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
10 364.20	H	54.5	11.3	-----	65.8	-----	68.2	-----	2.4	-----	Peak
10 364.27	V	50.2	11.3	-----	61.5	-----	68.2	-----	6.7	-----	Peak
15 549.83	H	50.0	14.2	-----	64.2	-----	74.0	-----	9.8	-----	Peak
15 542.79	H	36.5	14.2	0.3	-----	51.0	-----	54.0	-----	3.0	Average
15 512.79	V	48.5	14.3	-----	62.8	-----	74.0	-----	11.2	-----	Peak
15 531.40	V	36.2	14.2	0.3	-----	50.7	-----	54.0	-----	3.3	Average

Ch.40(5 200 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
10 404.33	H	54.8	11.4	-----	66.2	-----	68.2	-----	2.0	-----	Peak
10 400.08	V	48.8	11.3	-----	60.1	-----	68.2	-----	8.1	-----	Peak
15 602.89	H	49.9	14.1	-----	64.0	-----	74.0	-----	10.0	-----	Peak
15 597.24	H	36.2	14.1	0.3	-----	50.6	-----	54.0	-----	3.4	Average
15 593.91	V	46.4	14.1	-----	60.5	-----	74.0	-----	13.5	-----	Peak
15 598.35	V	35.8	14.1	0.3	-----	50.2	-----	54.0	-----	3.8	Average

Ch.48(5 240 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
10 483.74	H	55.4	11.6	-----	67.0	-----	68.2	-----	1.2	-----	Peak
10 475.62	V	50.7	11.6	-----	62.3	-----	68.2	-----	5.9	-----	Peak
15 724.57	H	50.4	14.3	-----	64.7	-----	74.0	-----	9.3	-----	Peak
15 749.30	H	36.4	14.5	0.3	-----	51.2	-----	54.0	-----	2.8	Average
15 740.59	V	47.6	14.5	-----	62.1	-----	74.0	-----	11.9	-----	Peak
15 756.80	V	36.5	14.5	0.3	-----	51.3	-----	54.0	-----	2.7	Average

Ch.52(5 260 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
10 523.86	H	55.0	11.6	-----	66.6	-----	68.2	-----	1.6	-----	Peak
10 520.12	V	49.1	11.6	-----	60.7	-----	68.2	-----	7.5	-----	Peak
15 781.62	H	51.9	14.4	-----	66.3	-----	74.0	-----	7.7	-----	Peak
15 780.13	H	37.5	14.4	0.3	-----	52.2	-----	54.0	-----	1.8	Average
15 766.80	V	48.1	14.5	-----	62.6	-----	74.0	-----	11.4	-----	Peak
15 784.95	V	36.5	14.4	0.3	-----	51.2	-----	54.0	-----	2.8	Average

Ch.60(5 300 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
10 596.76	H	53.3	11.8	-----	65.1	-----	74.0	-----	8.9	-----	Peak
10 600.56	H	36.5	11.8	0.3	-----	48.6	-----	54.0	-----	5.4	Average
10604.49	V	48.9	11.8	-----	60.7	-----	74.0	-----	13.3	-----	Peak
10 596.50	V	35.0	11.8	0.3	-----	47.1	-----	54.0	-----	6.9	Average
15 902.93	H	50.2	14.6	-----	64.8	-----	74.0	-----	9.2	-----	Peak
15 887.37	H	36.4	14.6	0.3	-----	51.3	-----	54.0	-----	2.7	Average
15 885.24	V	46.2	14.6	-----	60.8	-----	74.0	-----	13.2	-----	Peak
15 883.48	V	35.9	14.6	0.3	-----	50.8	-----	54.0	-----	3.2	Average

Ch.64(5 320 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
10 648.67	H	53.2	11.8	-----	65.0	-----	74.0	-----	9.0	-----	Peak
10 639.46	H	35.9	11.8	0.3	-----	48.0	-----	54.0	-----	6.0	Average
10 638.11	V	47.7	11.8	-----	59.5	-----	74.0	-----	14.5	-----	Peak
10 639.65	V	34.7	11.8	0.3	-----	46.8	-----	54.0	-----	7.2	Average
15 961.45	H	49.1	14.4	-----	63.5	-----	74.0	-----	10.5	-----	Peak
15 957.93	H	36.1	14.4	0.3	-----	50.8	-----	54.0	-----	3.2	Average
15 954.32	V	46.9	14.4	-----	61.3	-----	74.0	-----	12.7	-----	Peak
15 965.90	V	35.1	14.4	0.3	-----	49.8	-----	54.0	-----	4.2	Average

Ch.100(5 500 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
11 000.76	H	48.9	12.0	-----	60.9	-----	74.0	-----	13.1	-----	Peak
11 001.60	H	34.6	12.0	0.3	-----	46.9	-----	54.0	-----	7.1	Average
10 998.57	V	48.1	12.0	-----	60.1	-----	74.0	-----	13.9	-----	Peak
11 001.92	V	33.9	12.0	0.3	-----	46.2	-----	54.0	-----	7.8	Average
16 495.87	H	49.2	16.6	-----	65.8	-----	68.2	-----	2.4	-----	Peak
16 488.55	V	46.8	16.6	-----	63.4	-----	68.2	-----	4.8	-----	Peak

Ch.120(5 600 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
11 200.54	H	51.2	12.8	-----	64.0	-----	74.0	-----	10.0	-----	Peak
11 201.24	H	35.4	12.8	0.3	-----	48.5	-----	54.0	-----	5.5	Average
11 196.16	V	47.7	12.7	-----	60.4	-----	74.0	-----	13.6	-----	Peak
11 181.92	V	34.8	12.7	0.3	-----	47.8	-----	54.0	-----	6.2	Average
16 797.57	H	48.8	17.3	-----	66.1	-----	68.2	-----	2.1	-----	Peak
16 848.59	V	47.5	17.9	-----	65.4	-----	68.2	-----	2.8	-----	Peak

Ch.140(5 700 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
11 405.46	H	50.8	12.4	-----	63.2	-----	74.0	-----	10.8	-----	Peak
11 400.83	H	35.2	12.4	0.3	-----	47.9	-----	54.0	-----	6.1	Average
11 394.45	V	47.4	12.3	-----	59.7	-----	74.0	-----	14.3	-----	Peak
11 399.54	V	34.7	12.4	0.3	-----	47.4	-----	54.0	-----	6.6	Average
17 097.98	H	47.2	18.7	-----	65.9	-----	68.2	-----	2.3	-----	Peak
17 101.31	V	47.0	18.7	-----	65.7	-----	68.2	-----	2.5	-----	Peak

Ch.144(5 720 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
11 444.24	H	49.4	12.7	-----	62.1	-----	74.0	-----	11.9	-----	Peak
11 439.21	H	34.5	12.7	0.3	-----	47.5	-----	54.0	-----	6.5	Average
11 440.63	V	46.3	12.7	-----	59.0	-----	74.0	-----	15.0	-----	Peak
11 442.75	V	34.0	12.7	0.3	-----	47.0	-----	54.0	-----	7.0	Average

Ch.149(5 745 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
11 486.35	H	51.1	12.6	-----	63.7	-----	74.0	-----	10.3	-----	Peak
11 489.57	H	35.3	12.6	0.3	-----	48.2	-----	54.0	-----	5.8	Average
11 490.28	V	47.0	12.6	-----	59.6	-----	74.0	-----	14.4	-----	Peak
11 487.45	V	34.5	12.6	0.3	-----	47.4	-----	54.0	-----	6.6	Average

Ch.157(5 785 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
11 572.27	H	50.4	12.9	-----	63.3	-----	74.0	-----	10.7	-----	Peak
11 571.17	H	35.0	12.9	0.3	-----	48.2	-----	54.0	-----	5.8	Average
11 577.68	V	46.8	12.9	-----	59.7	-----	74.0	-----	14.3	-----	Peak
11 572.14	V	34.3	12.9	0.3	-----	47.5	-----	54.0	-----	6.5	Average

Ch.165(5 825 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
11 657.28	H	50.4	12.6	-----	63.0	-----	74.0	-----	11.0	-----	Peak
11 649.94	H	34.9	12.7	0.3	-----	47.9	-----	54.0	-----	6.1	Average
11 649.42	V	46.6	12.7	-----	59.3	-----	74.0	-----	14.7	-----	Peak
11 630.62	V	34.5	12.8	0.3	-----	47.6	-----	54.0	-----	6.4	Average

Ch.169(5 845 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
11 697.27	H	51.6	12.4	-----	64.0	-----	74.0	-----	10.0	-----	Peak
11 691.15	H	35.2	12.4	0.3	-----	47.9	-----	54.0	-----	6.1	Average
11 684.13	V	46.9	12.4	-----	59.3	-----	74.0	-----	14.7	-----	Peak
11 693.15	V	34.4	12.4	0.3	-----	47.1	-----	54.0	-----	6.9	Average



Ch.173(5 865 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
11 726.45	H	50.9	12.5	-----	63.4	-----	74.0	-----	10.6	-----	Peak
11 727.48	H	35.4	12.5	0.3	-----	48.2	-----	54.0	-----	5.8	Average
11 732.11	V	47.6	12.5	-----	60.1	-----	74.0	-----	13.9	-----	Peak
11 730.38	V	34.8	12.5	0.3	-----	47.6	-----	54.0	-----	6.4	Average


Ch.177(5 885 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
11 773.53	H	51.3	12.8	-----	64.1	-----	74.0	-----	9.9	-----	Peak
11 771.66	H	35.9	12.8	0.3	-----	49.0	-----	54.0	-----	5.0	Average
11 769.40	V	46.8	12.7	-----	59.5	-----	74.0	-----	14.5	-----	Peak
11 773.07	V	35.0	12.8	0.3	-----	48.1	-----	54.0	-----	5.9	Average

Remarks

1. The unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down positon(X,Y axis). The worst emission was found in lie-down positon(X axis) and the worst case was recorded.
2. Peak Result = Reading + c.f(Correction factor)
 Average Result = Reading + c.f(Correction factor) + Duty Cycle Factor
3. Correction factor = Antenna factor + Cable loss - Amp Gain

Worst Case Mode :	802.11ax_HE20_242T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 180 MHz
Channel :	36

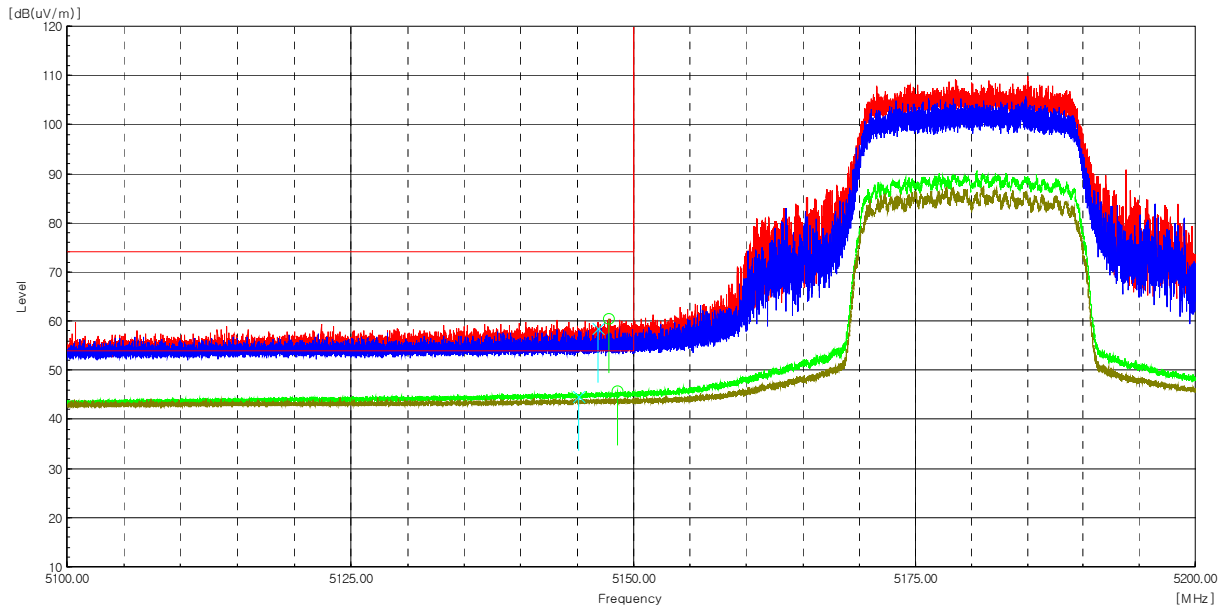

Frequency [MHz]	(P)	Reading [dBUV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
5 147.77	H	57.9	2.6	-----	60.5	-----	74.0	-----	13.5	-----	Peak
5 148.51	H	43.2	2.6	0.3	-----	46.1	-----	54.0	-----	7.9	Average
5 146.87	V	55.9	2.6	-----	58.5	-----	74.0	-----	15.5	-----	Peak
5 145.11	V	42.0	2.6	0.3	-----	44.9	-----	54.0	-----	9.1	Average

Radiated Restricted Band Edge Plot