

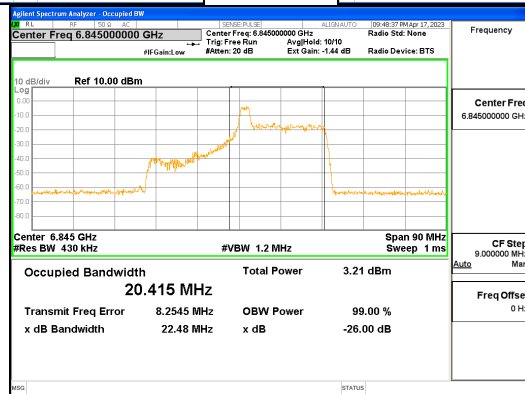




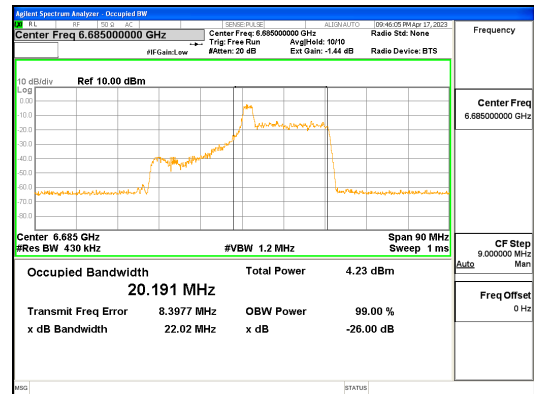


CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2023-00952
 Page (48) / (427) Pages

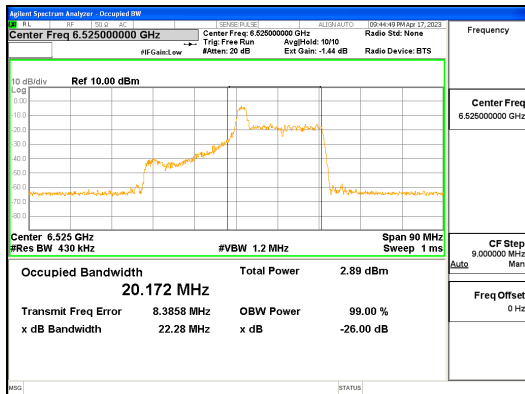

ANTO_802.11ax_HE40_26T_Mid_UNII 7

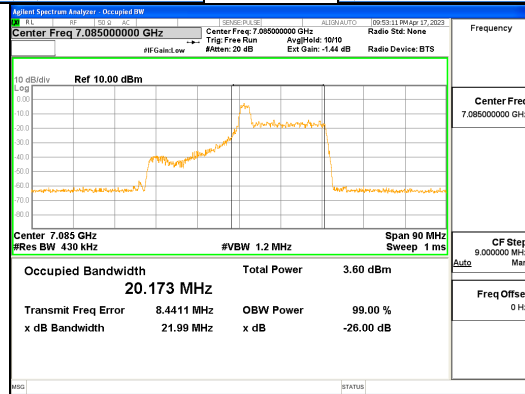
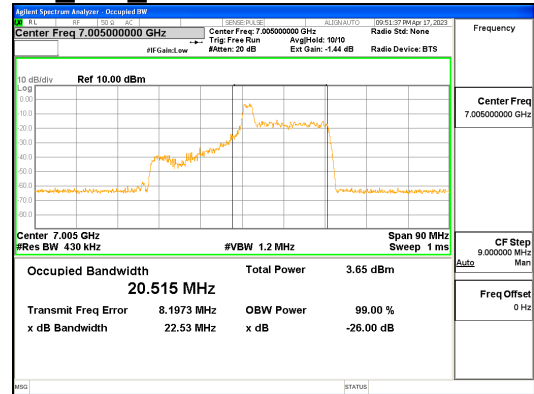
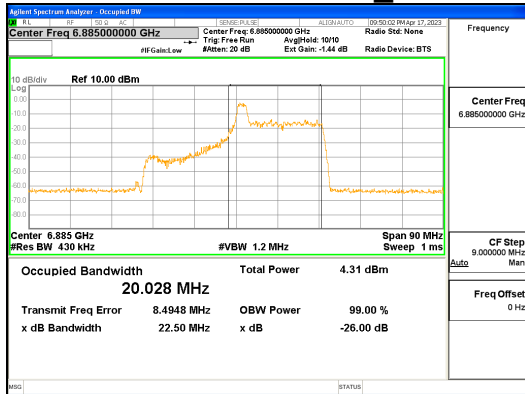


ANTO_802.11ax_HE40_26T_Mid_UNII 8





CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2023-00952
 Page (49) / (427) Pages

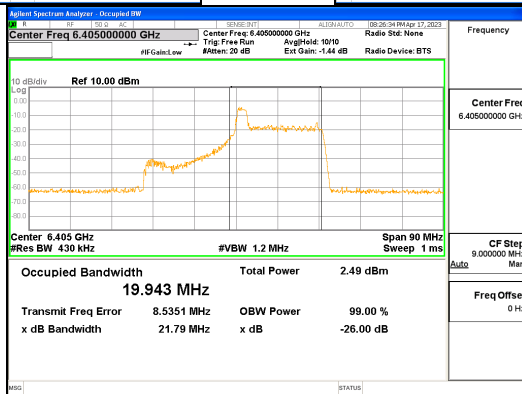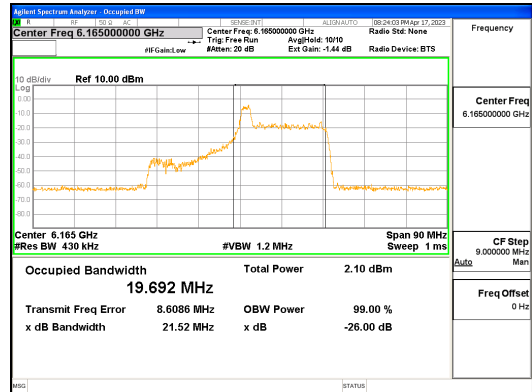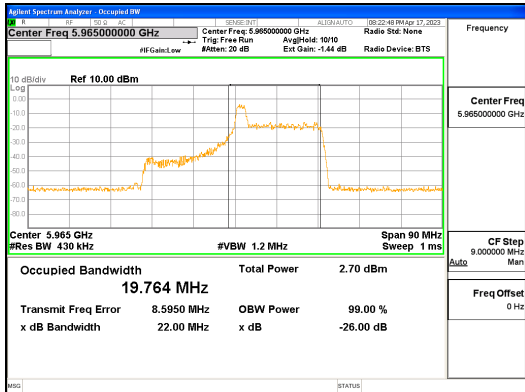

ANT1_802.11ax_HE40_26T_Mid_UNII 5


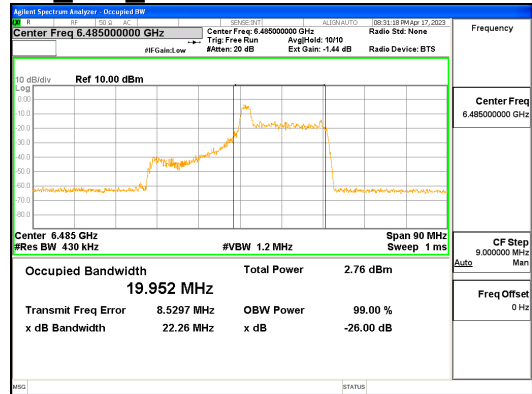
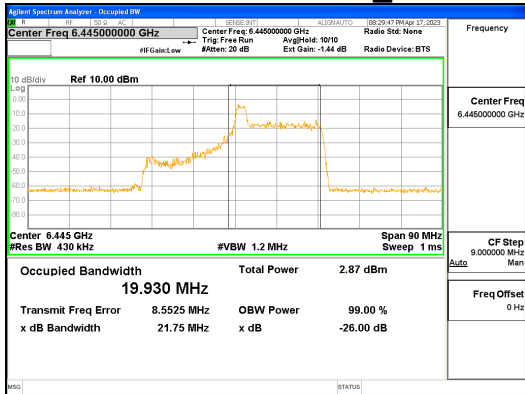


ANT1_802.11ax_HE40_26T_Mid_UNII 6






CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2023-00952
 Page (50) / (427) Pages

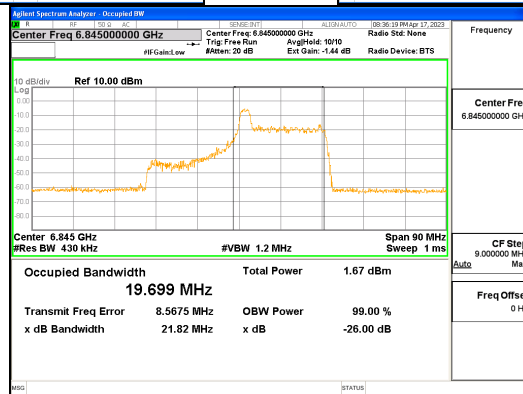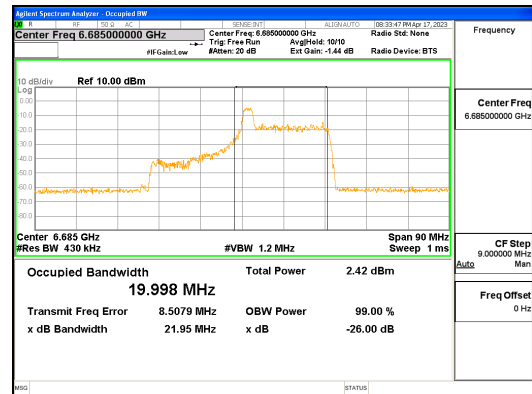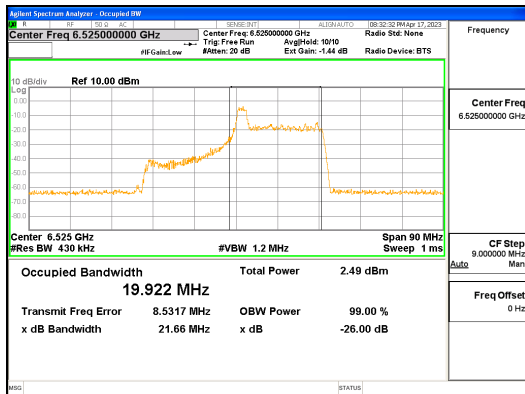

ANT1_802.11ax_HE40_26T_Mid_UNII 7

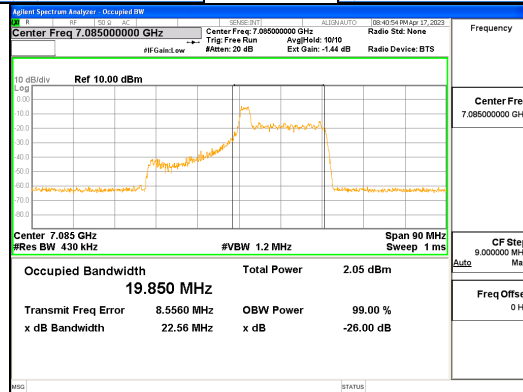
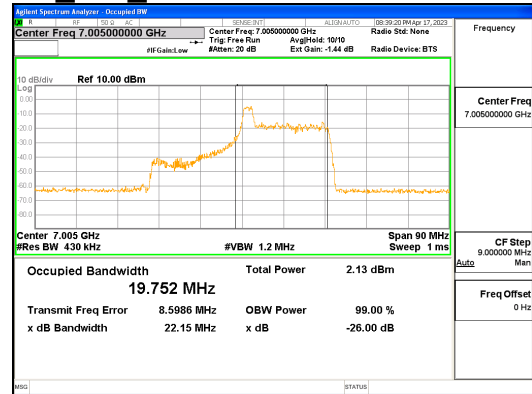
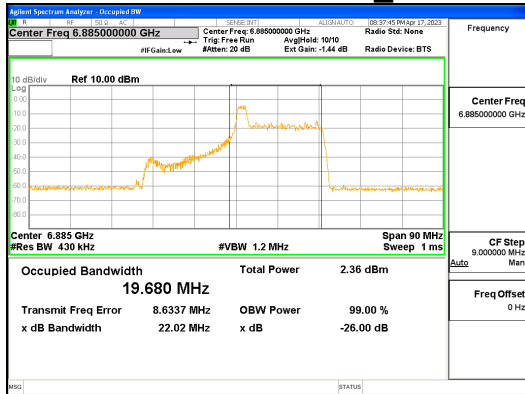


ANT1_802.11ax_HE40_26T_Mid_UNII 8





CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2023-00952
 Page (51) / (427) Pages

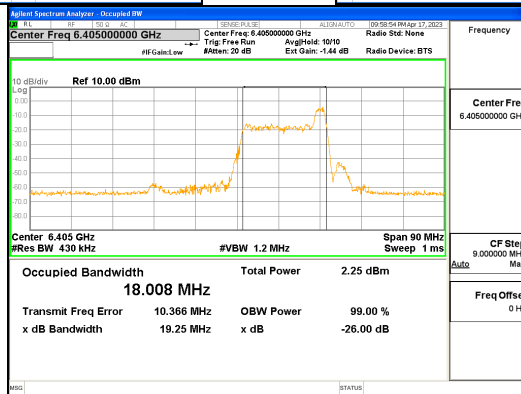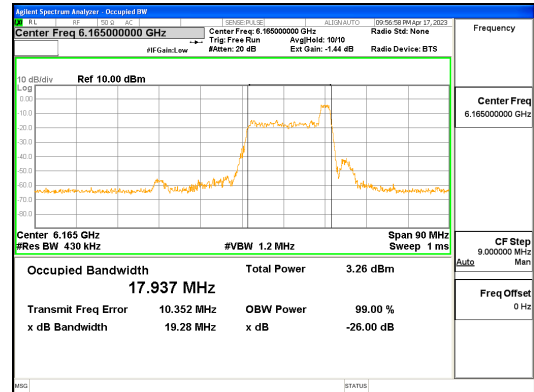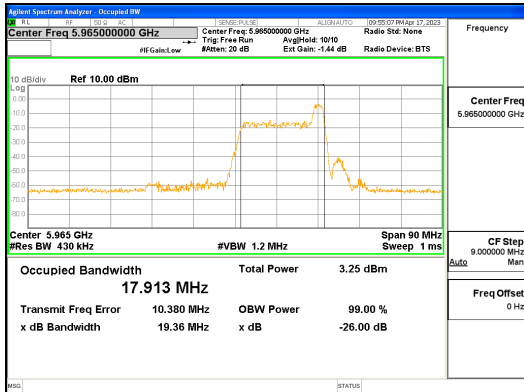

ANTO_802.11ax_HE40_26T_High_UNII 5


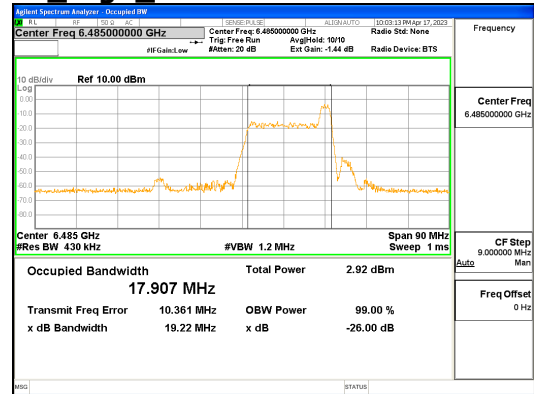
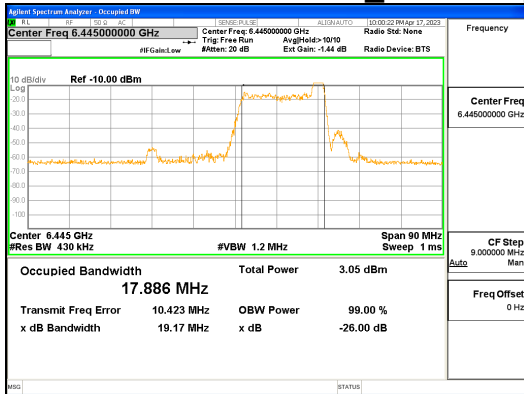


ANTO_802.11ax_HE40_26T_High_UNII 6






CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2023-00952
 Page (52) / (427) Pages

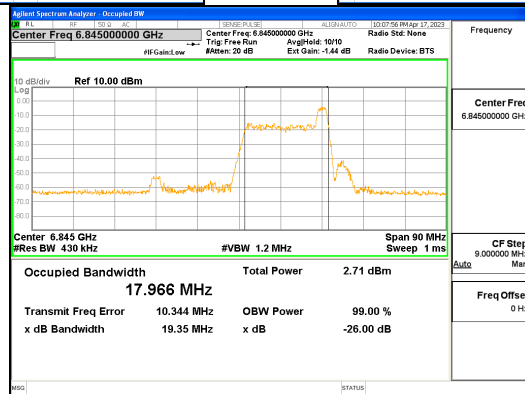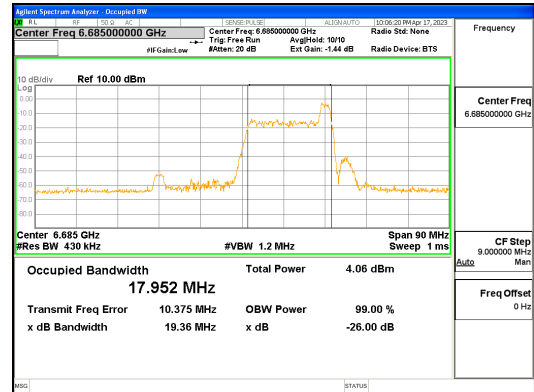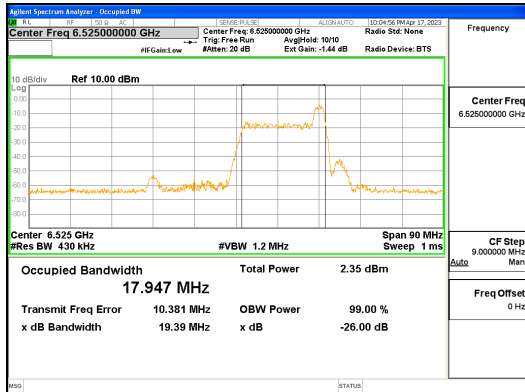

ANTO_802.11ax_HE40_26T_High_UNII 7

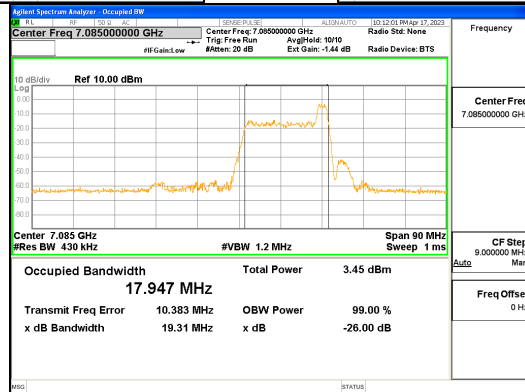
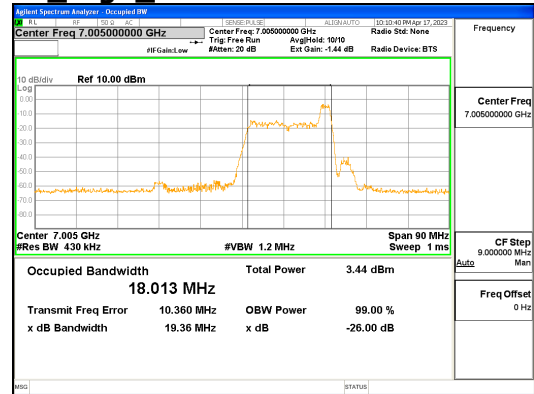
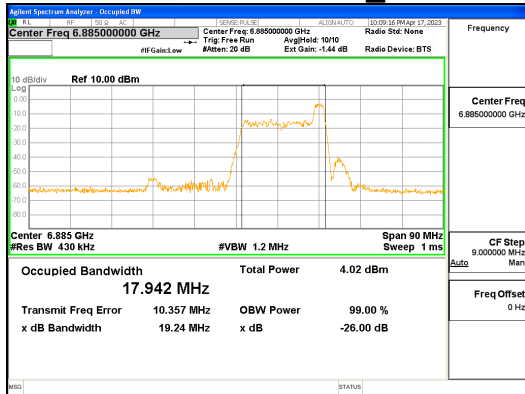


ANTO_802.11ax_HE40_26T_High_UNII 8





CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2023-00952
 Page (53) / (427) Pages

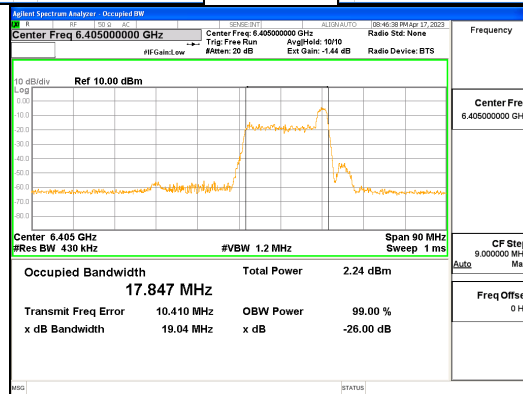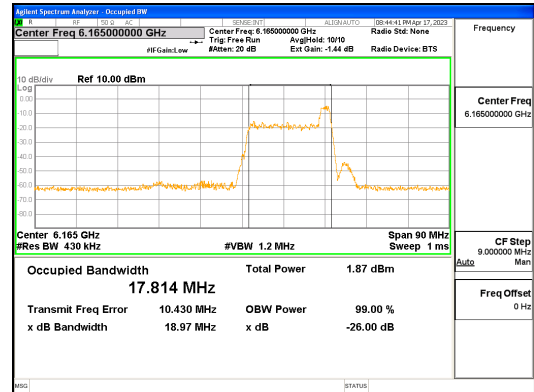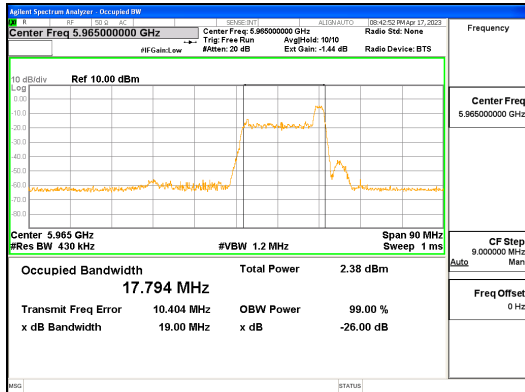

ANT1_802.11ax_HE40_26T_High_UNII 5


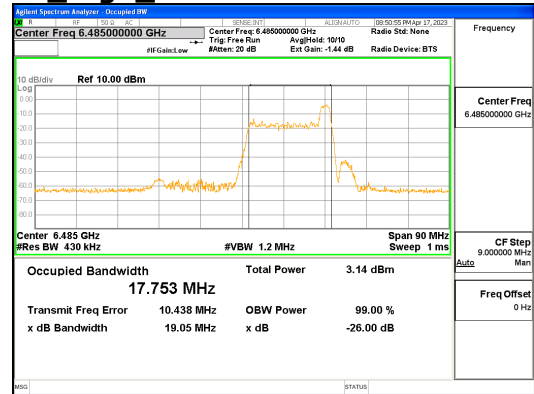
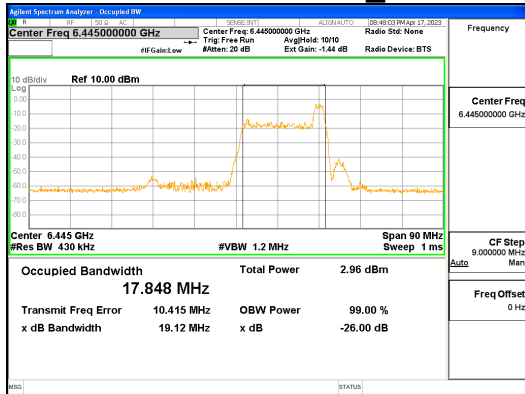


ANT1_802.11ax_HE40_26T_High_UNII 6






CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2023-00952
 Page (54) / (427) Pages

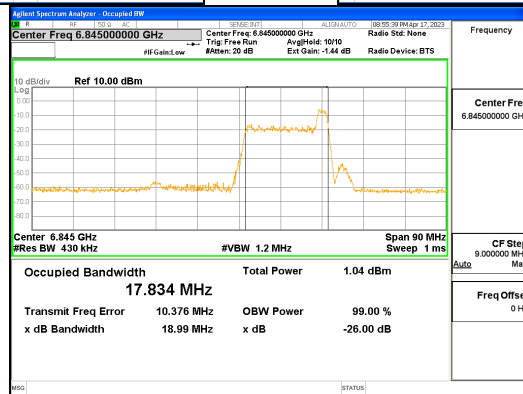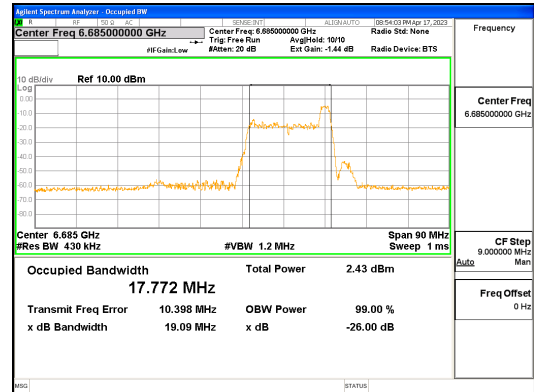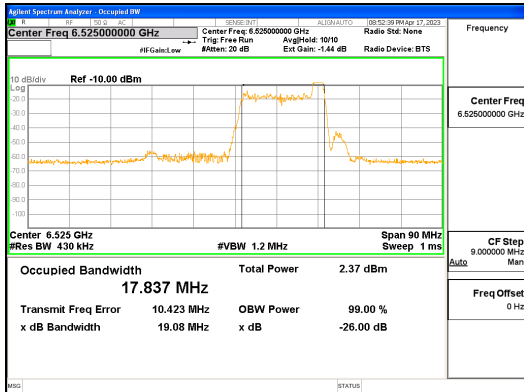

ANT1_802.11ax_HE40_26T_High_UNII 7

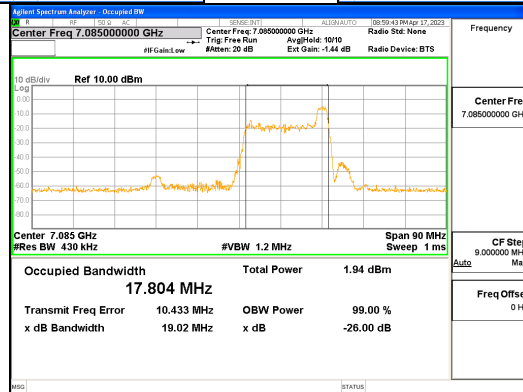
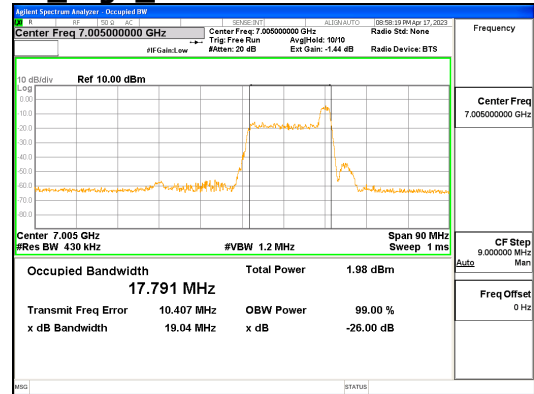
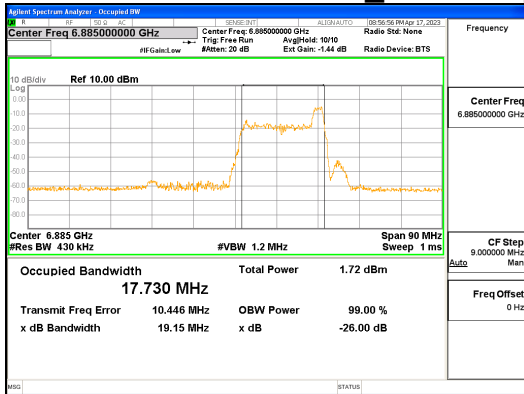


ANT1_802.11ax_HE40_26T_High_UNII 8





CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2023-00952
 Page (55) / (427) Pages

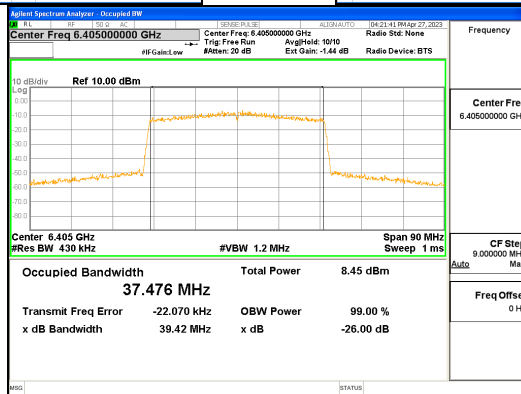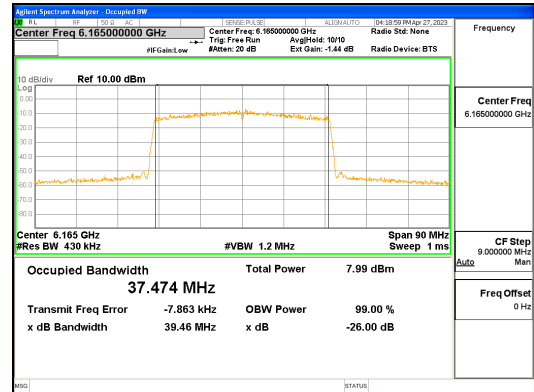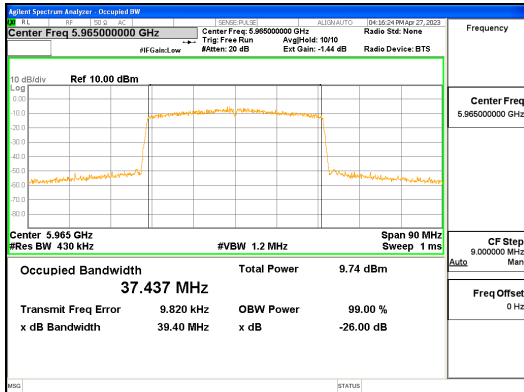

ANTO_802.11ax_HE40_484T_UNII 5


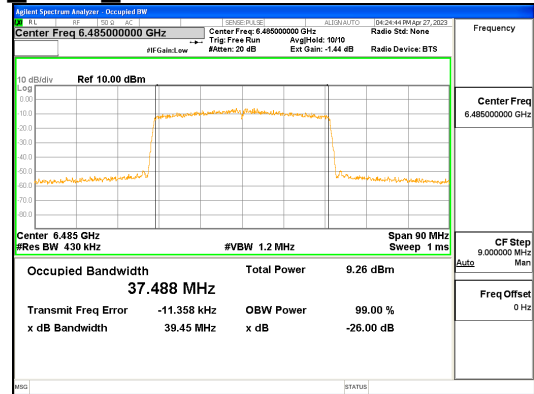
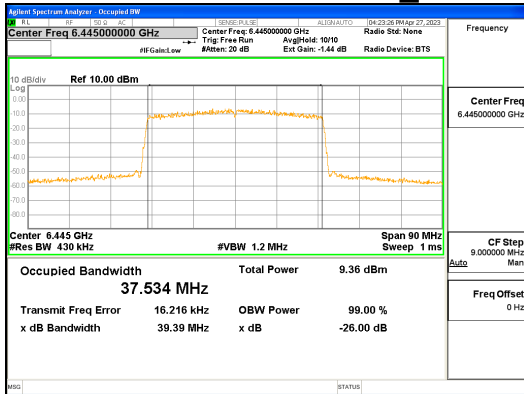


ANTO_802.11ax_HE40_484T_UNII 6






CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2023-00952
 Page (56) / (427) Pages

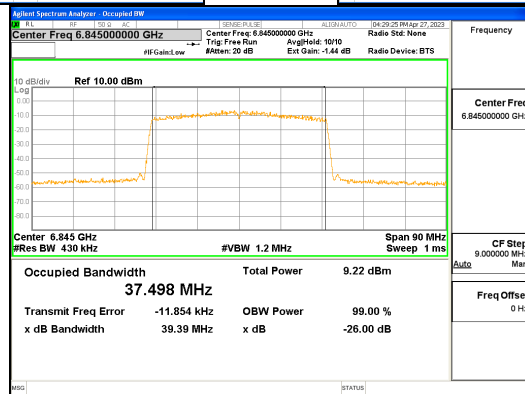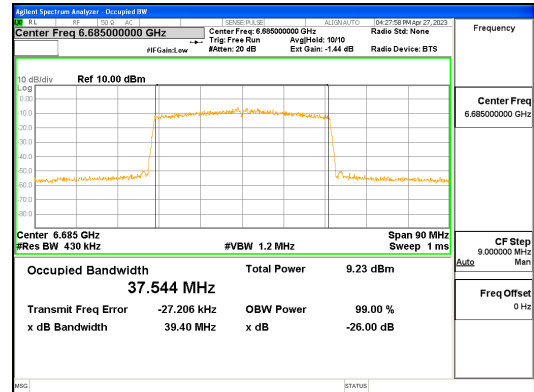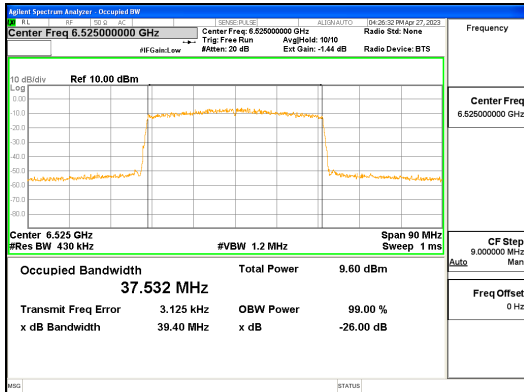

ANTO_802.11ax_HE40_484T_UNII 7

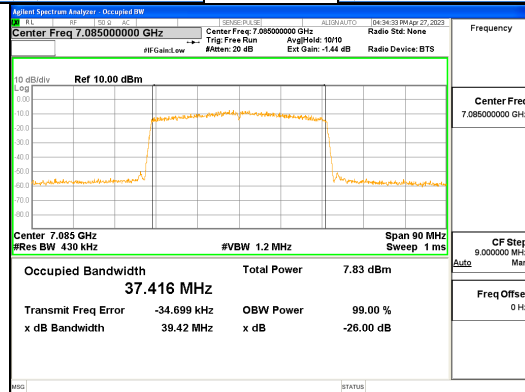
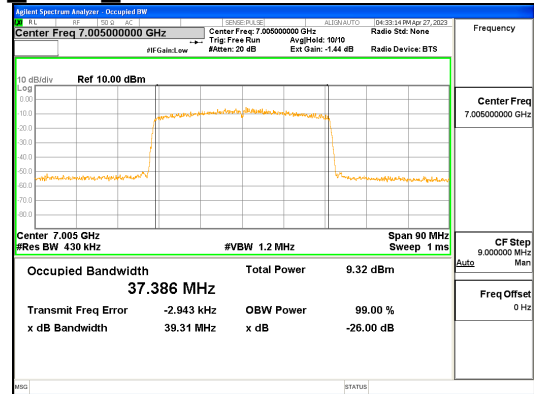
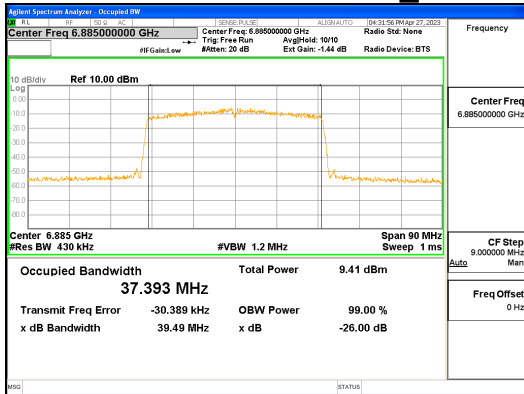


ANTO_802.11ax_HE40_484T_UNII 8





CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501




Report No.:
 CTK-2023-00952
 Page (57) / (427) Pages

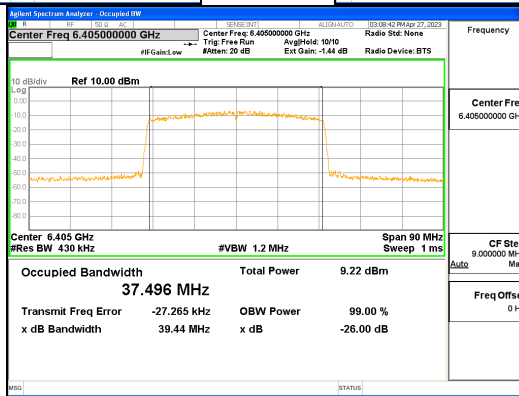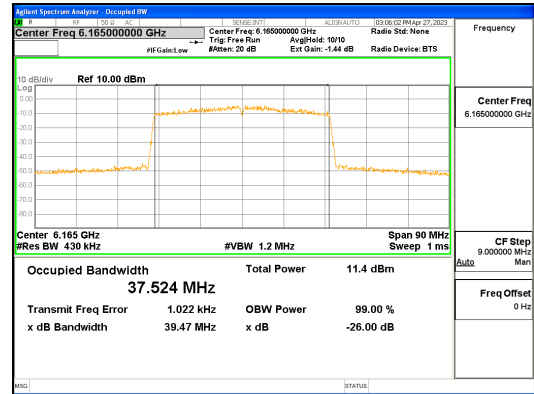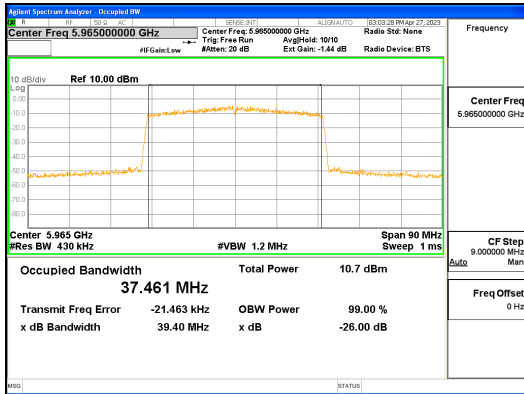




ANT1_802.11ax_HE40_484T_UNII 5

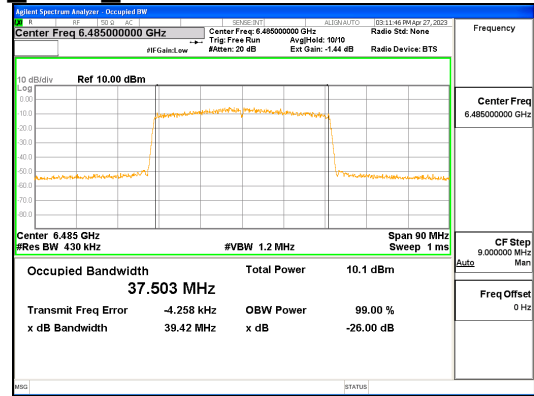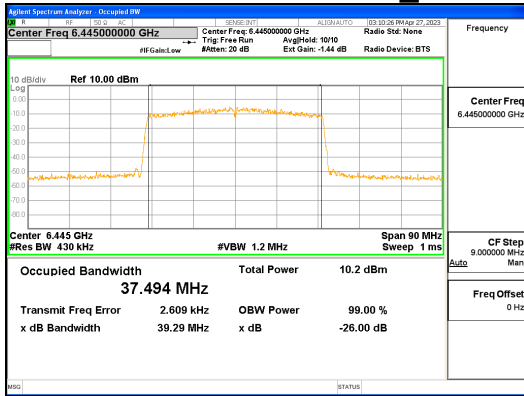




ANT1_802.11ax_HE40_484T_UNII 6

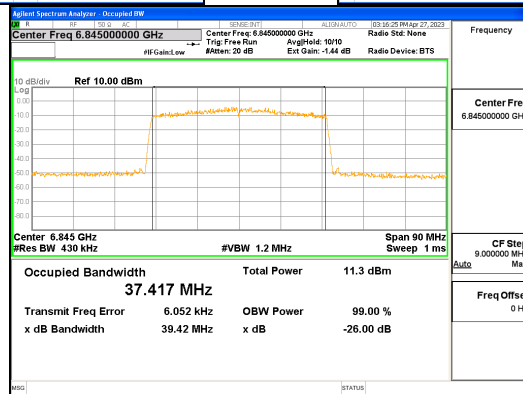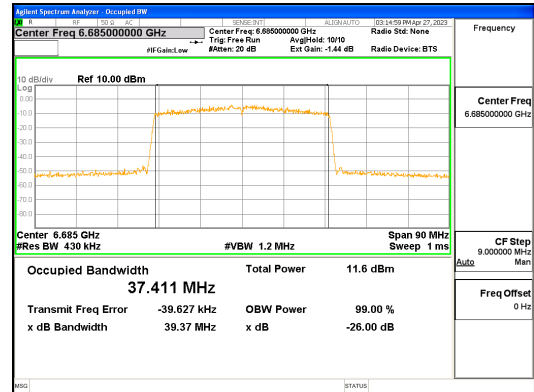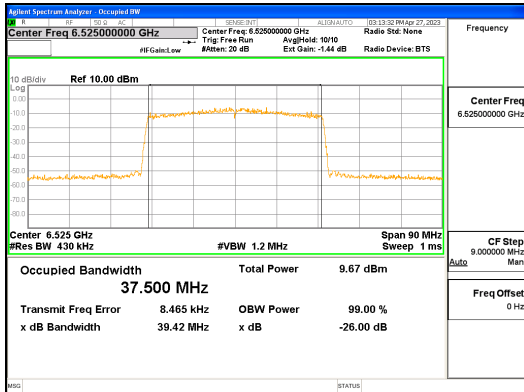


ANT1_802.11ax_HE40_484T_UNII 7

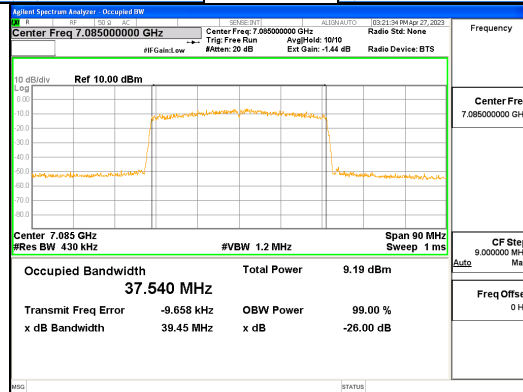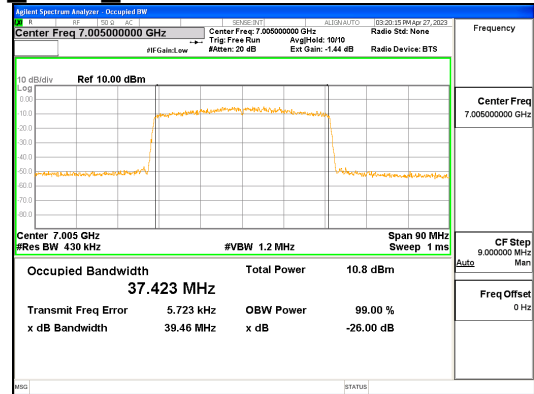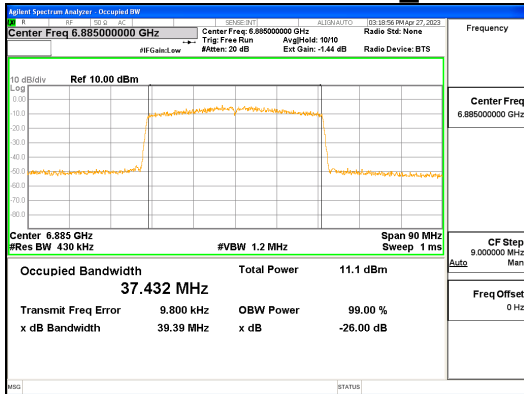

ANT1_802.11ax_HE40_484T_UNII 8

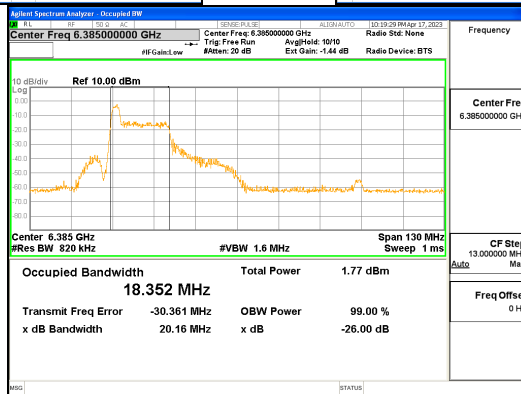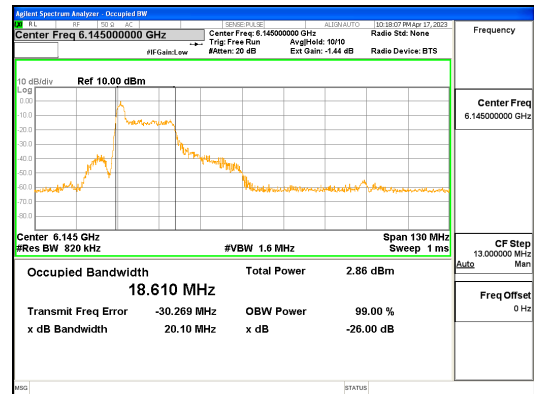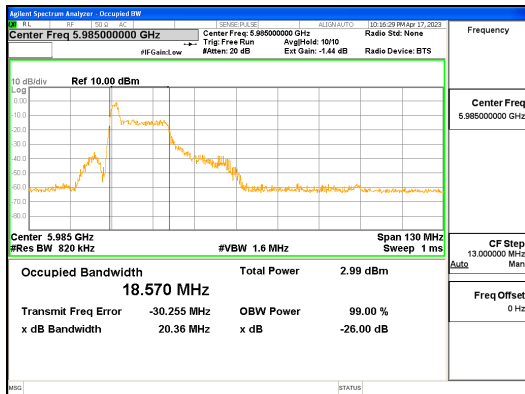

ANT0_802.11ax_HE80_26T_Low_UNII 5



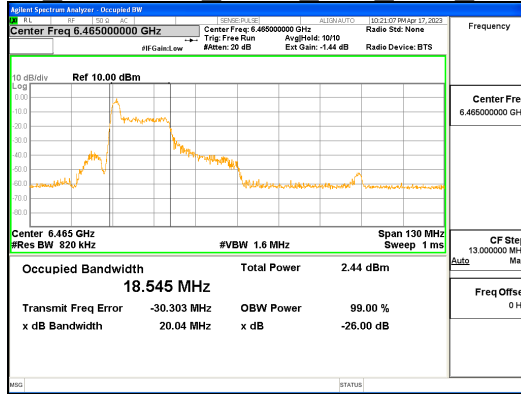


ANT0_802.11ax_HE80_26T_Low_UNII 6





CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2023-00952
 Page (60) / (427) Pages

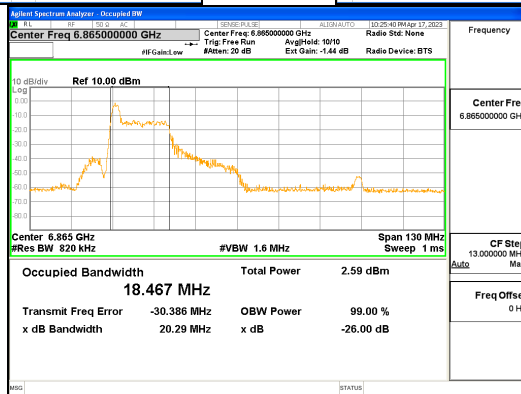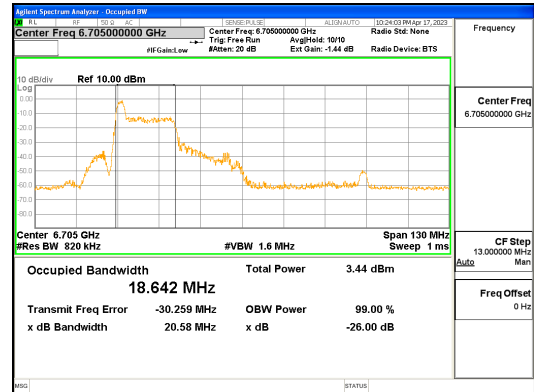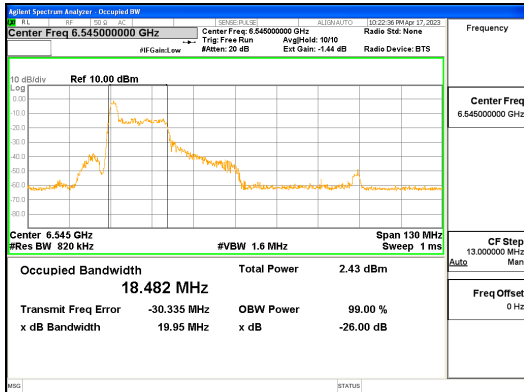

ANTO_802.11ax_HE80_26T_Low_UNII 7


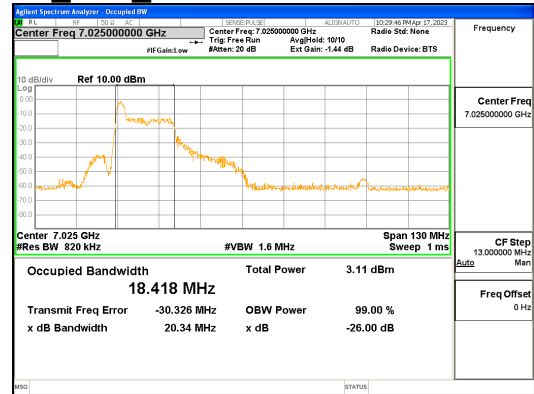
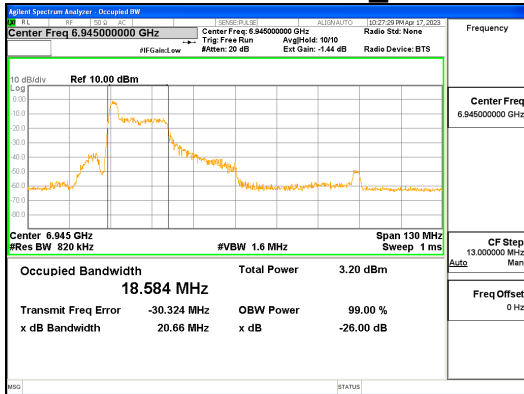


ANTO_802.11ax_HE80_26T_Low_UNII 8




CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2023-00952
 Page (61) / (427) Pages

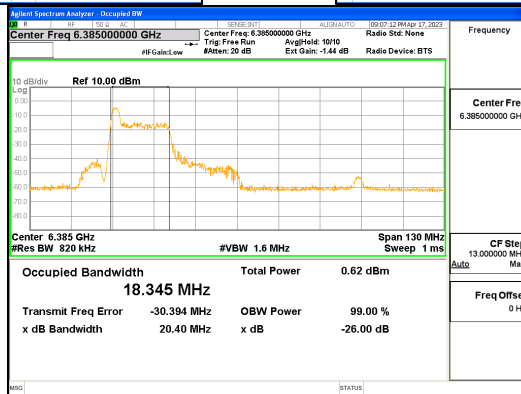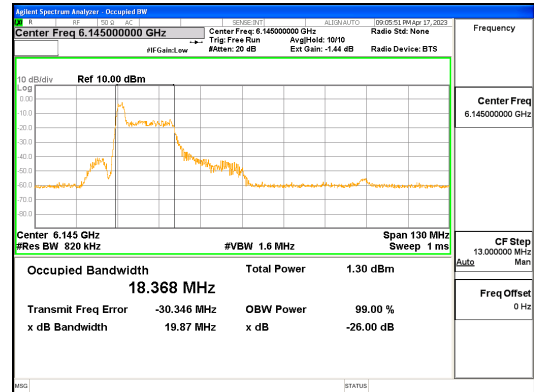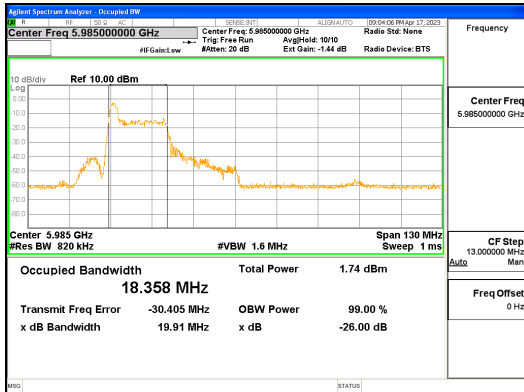

ANT1_802.11ax_HE80_26T_Low_UNII 5



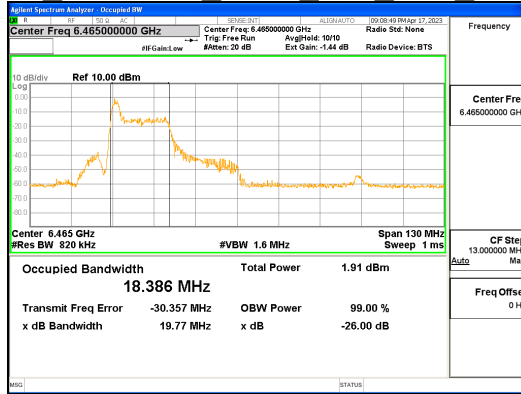


ANT1_802.11ax_HE80_26T_Low_UNII 6





CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501




Report No.:
 CTK-2023-00952
 Page (62) / (427) Pages

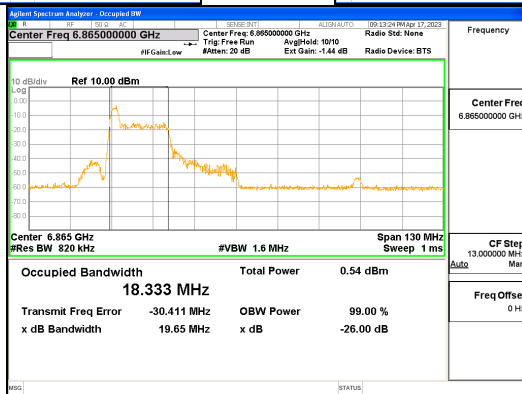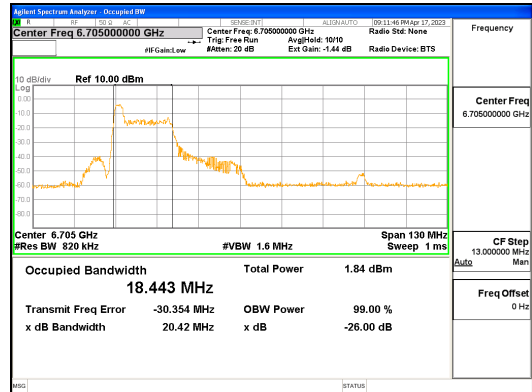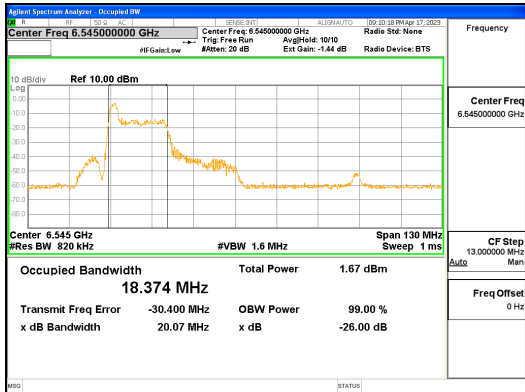


ANT1_802.11ax_HE80_26T_Low_UNII 7

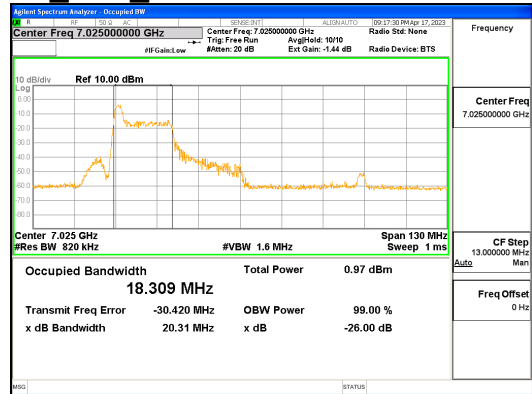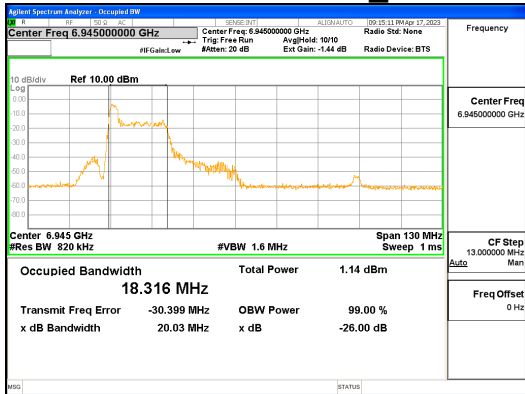

ANT1_802.11ax_HE80_26T_Low_UNII 8

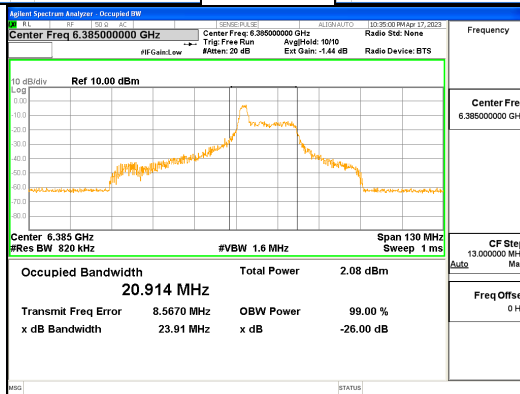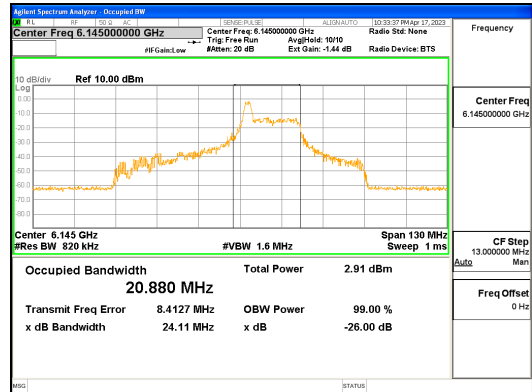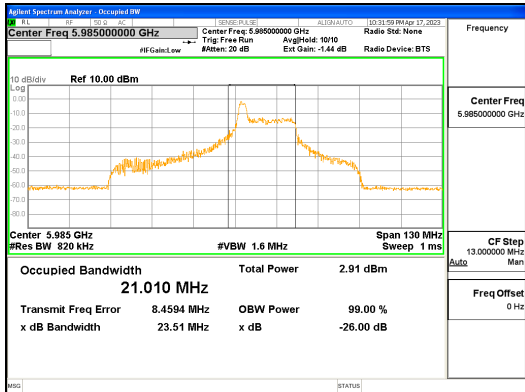

ANTO 802.11ax HE80_26T_Mid_UNII 5



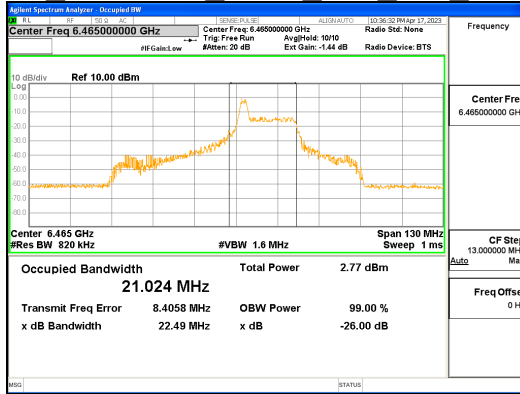


ANTO_802.11ax_HE80_26T_Mid_UNII 6





CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501




Report No.:
 CTK-2023-00952
 Page (64) / (427) Pages

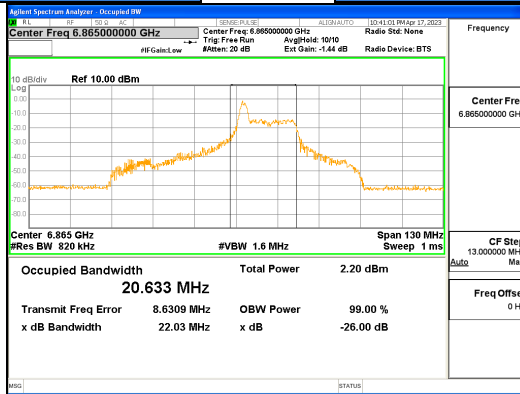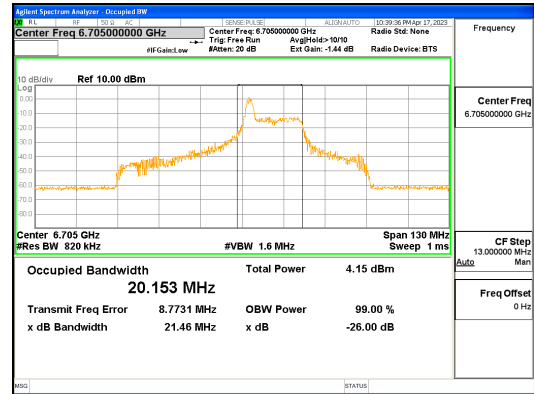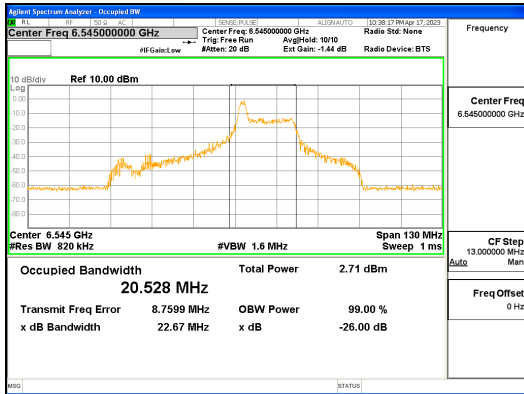


ANTO_802.11ax_HE80_26T_Mid_UNII 7

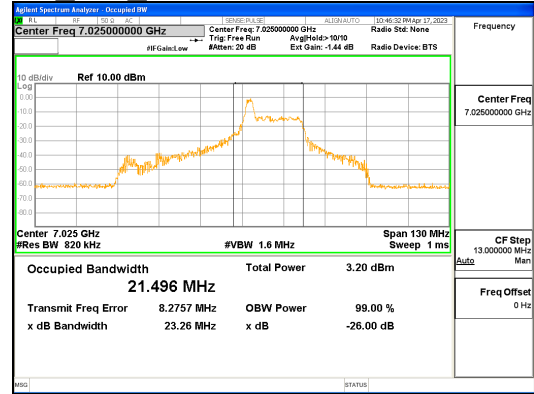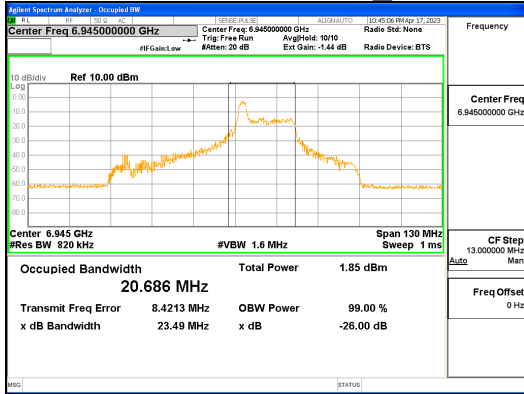

ANTO_802.11ax_HE80_26T_Mid_UNII 8

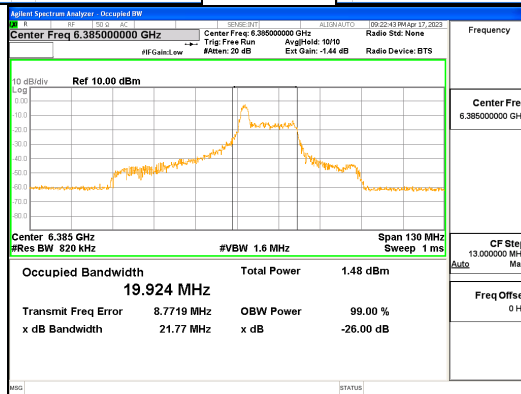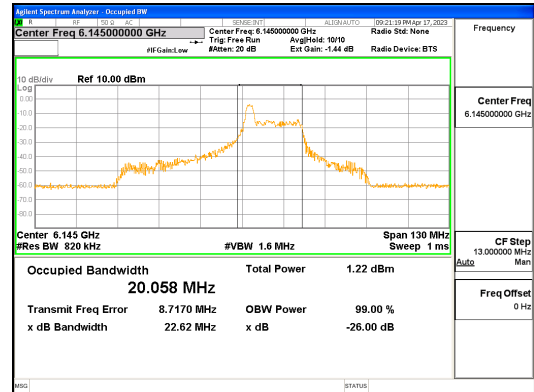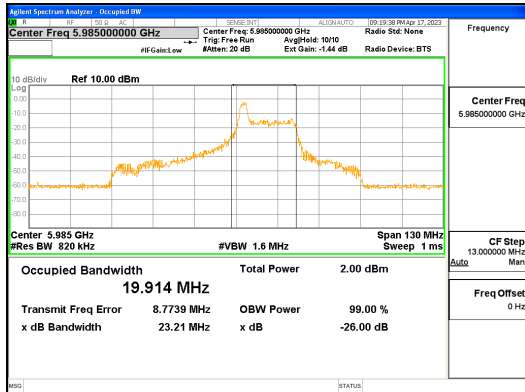

ANT1_802.11ax_HE80_26T_Mid_UNII 5



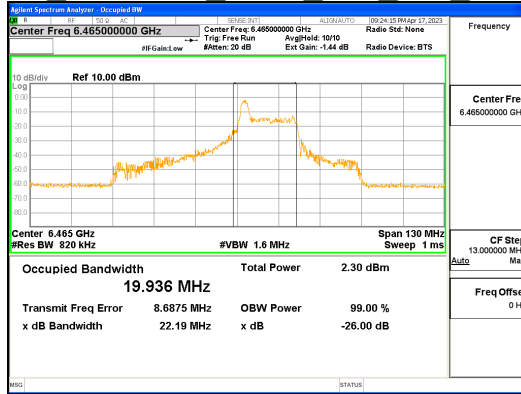


ANT1_802.11ax_HE80_26T_Mid_UNII 6





CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2023-00952
 Page (66) / (427) Pages

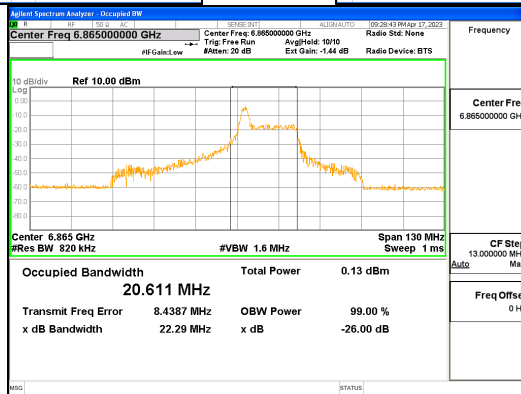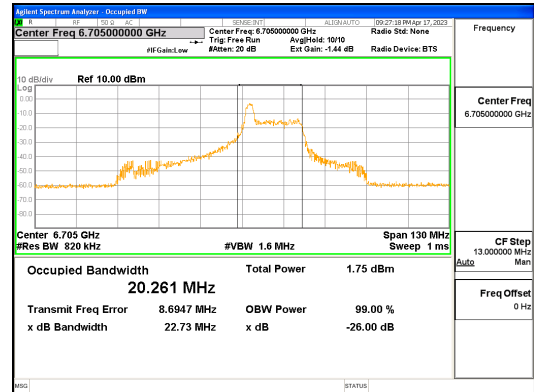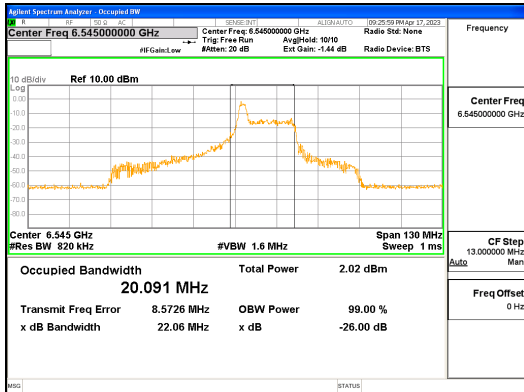

ANT1_802.11ax_HE80_26T_Mid_UNII 7


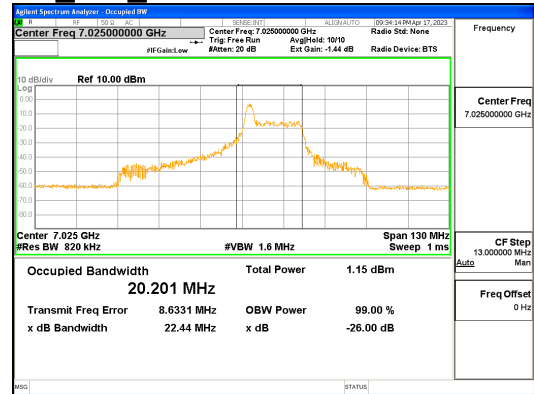
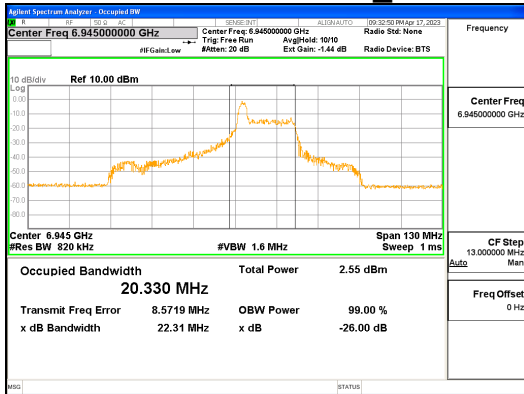


ANT1_802.11ax_HE80_26T_Mid_UNII 8




CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2023-00952
 Page (67) / (427) Pages

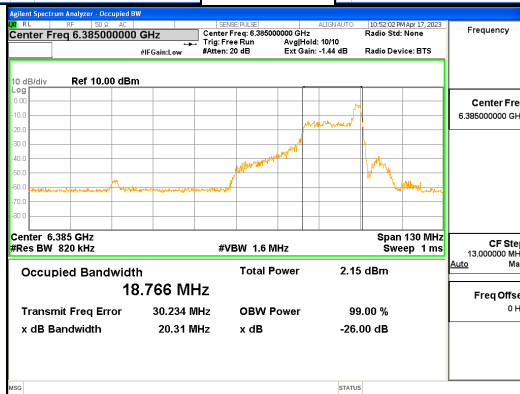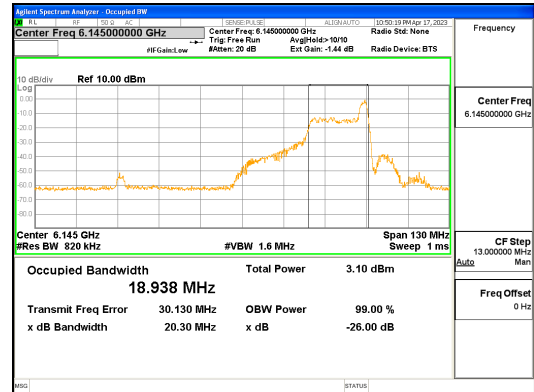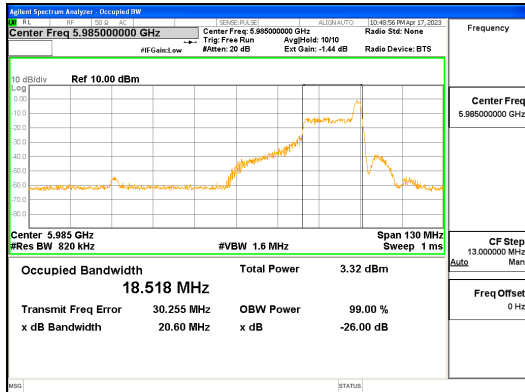

ANT0_802.11ax_HE80_26T_High_UNII 5



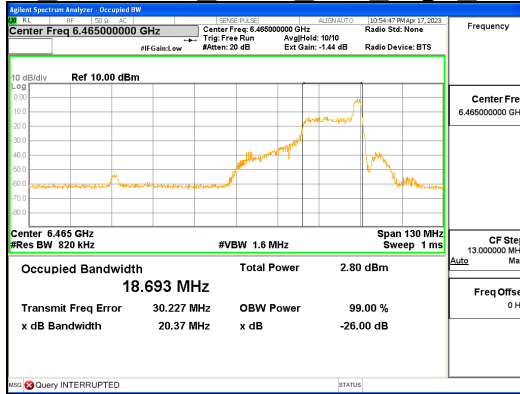


ANT0_802.11ax_HE80_26T_High_UNII 6





CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2023-00952
 Page (68) / (427) Pages

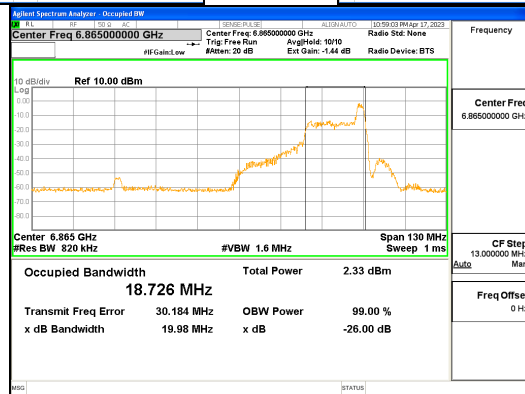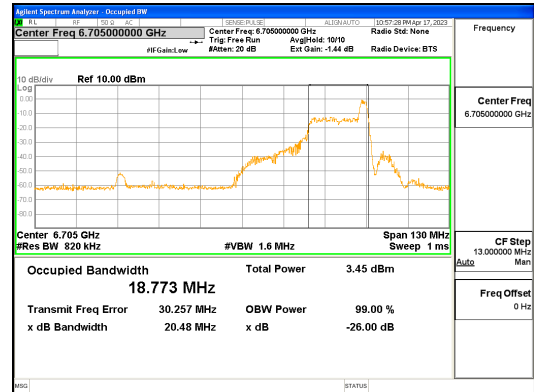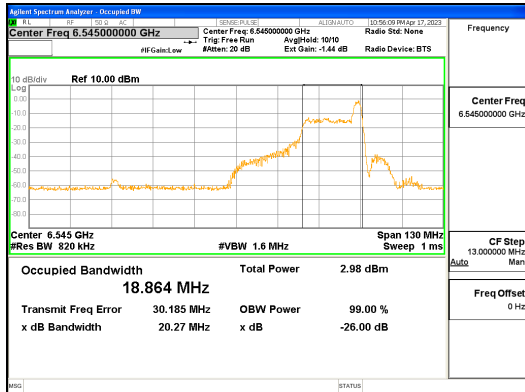

ANTO_802.11ax_HE80_26T_High_UNII 7


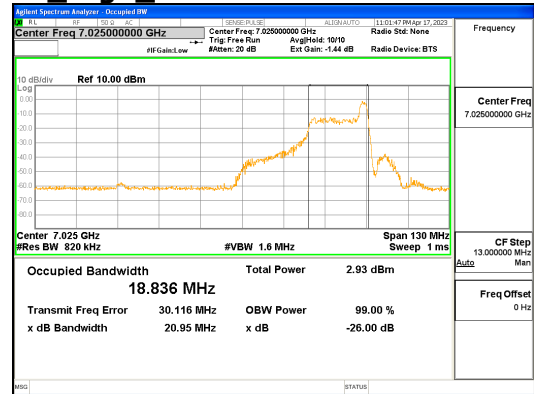
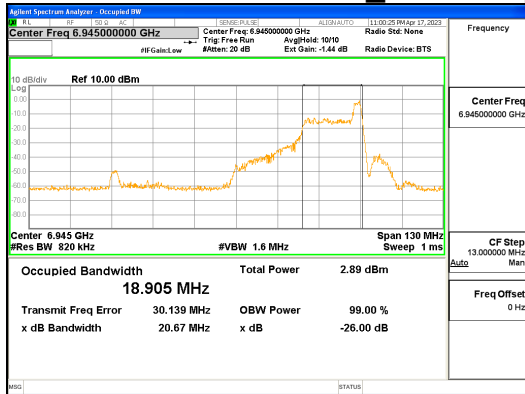


ANTO_802.11ax_HE80_26T_High_UNII 8




CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2023-00952
 Page (69) / (427) Pages

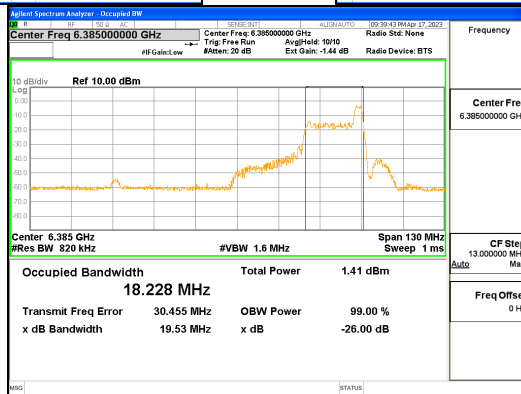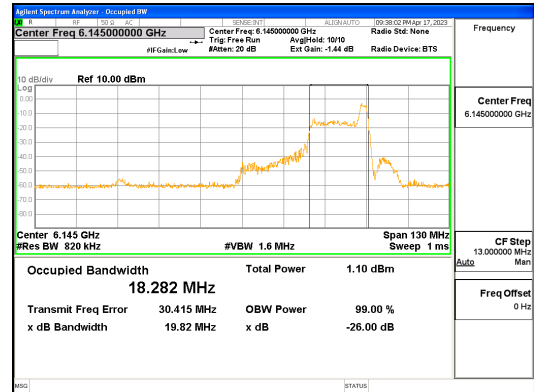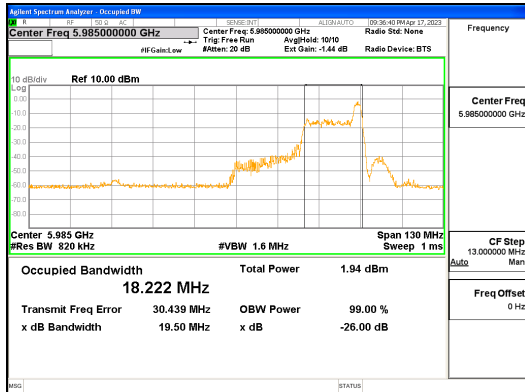

ANT1_802.11ax_HE80_26T_High_UNII 5



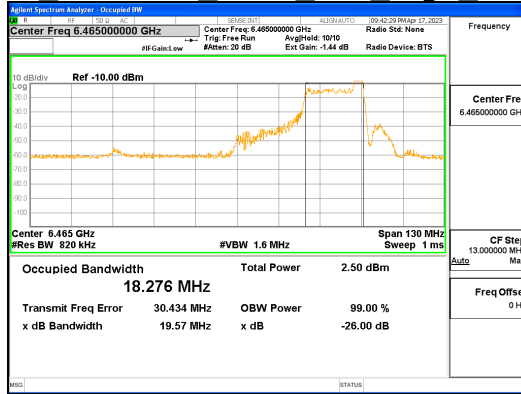


ANT1_802.11ax_HE80_26T_High_UNII 6





CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2023-00952
 Page (70) / (427) Pages

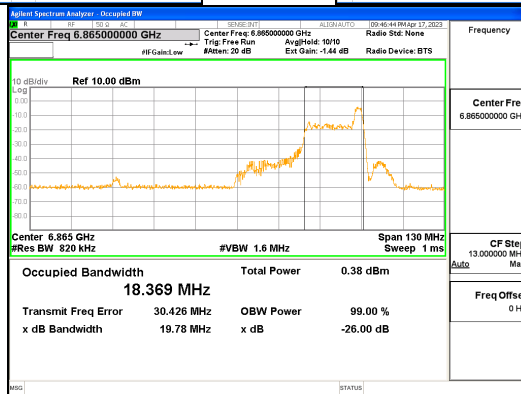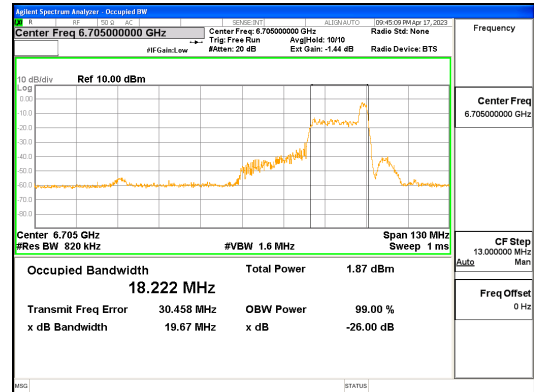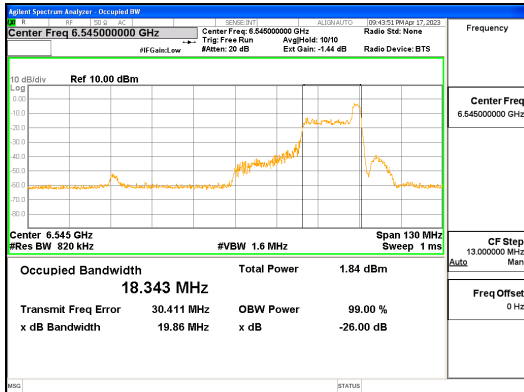

ANT1_802.11ax_HE80_26T_High_UNII 7


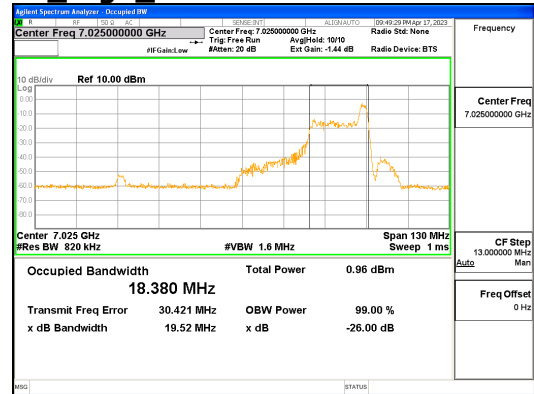
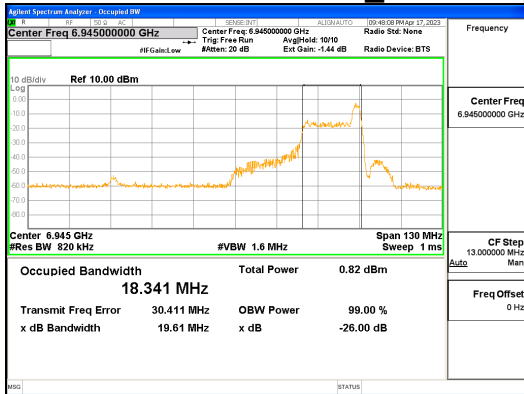


ANT1_802.11ax_HE80_26T_High_UNII 8




CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2023-00952
 Page (71) / (427) Pages

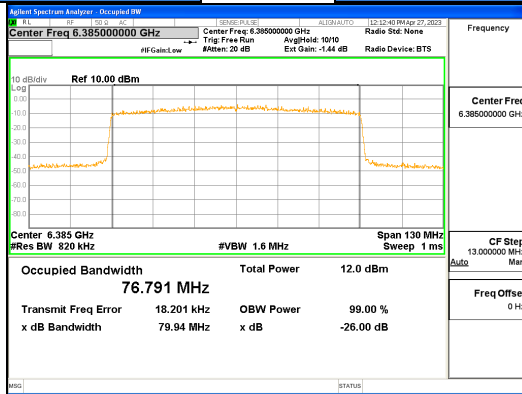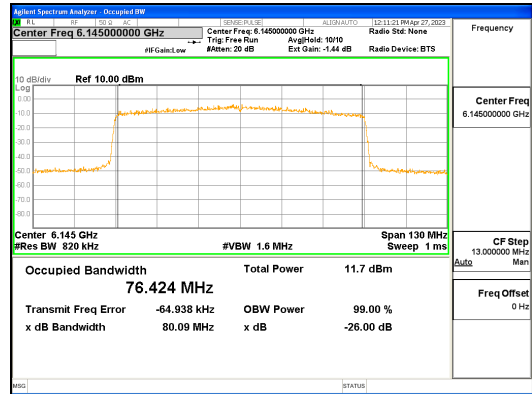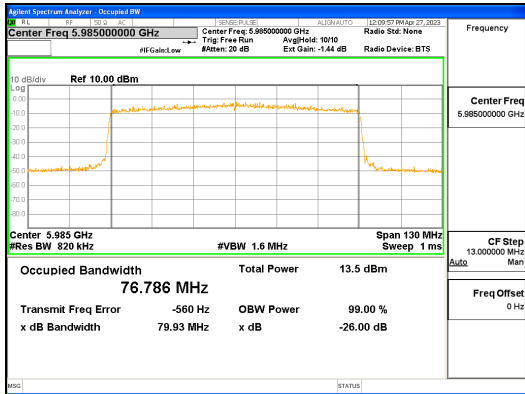

ANTO_802.11ax_HE80_996T_UNII 5



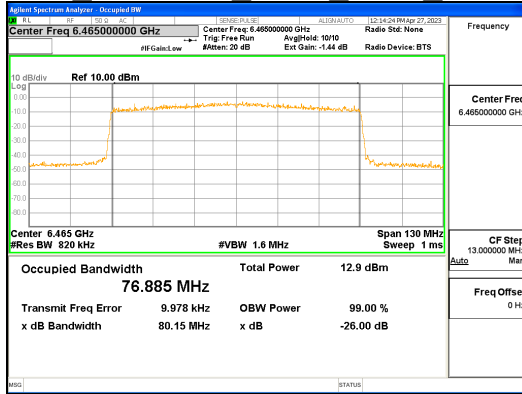


ANTO_802.11ax_HE80_996T_UNII 6





CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2023-00952
 Page (72) / (427) Pages

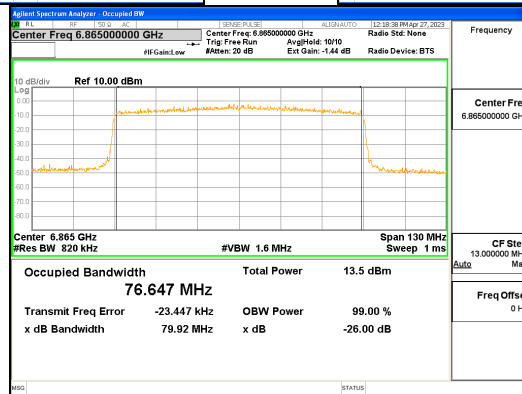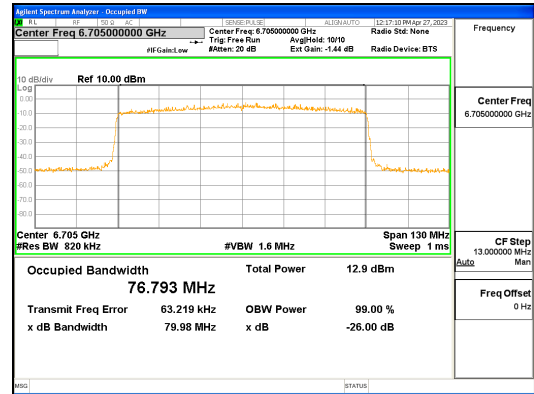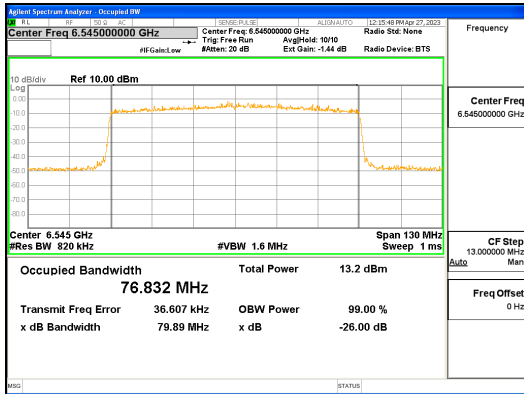

ANTO_802.11ax_HE80_996T_UNII 7


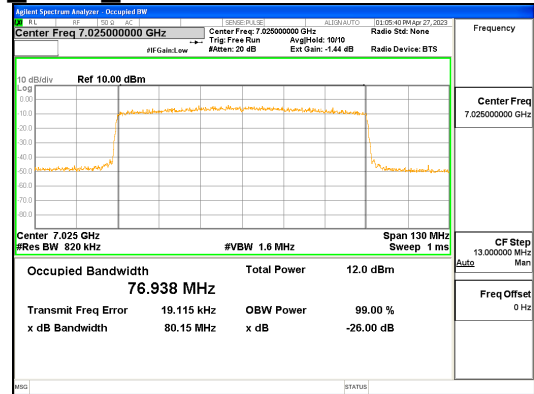
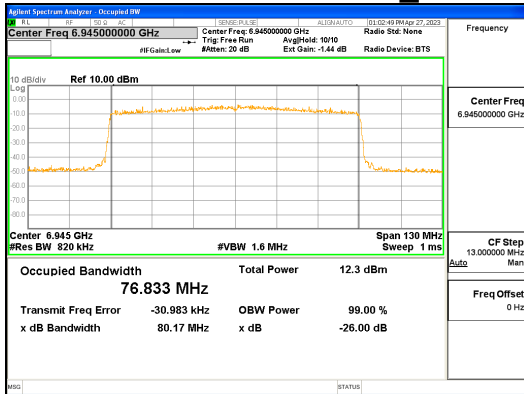


ANTO_802.11ax_HE80_996T_UNII 8




CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2023-00952
 Page (73) / (427) Pages

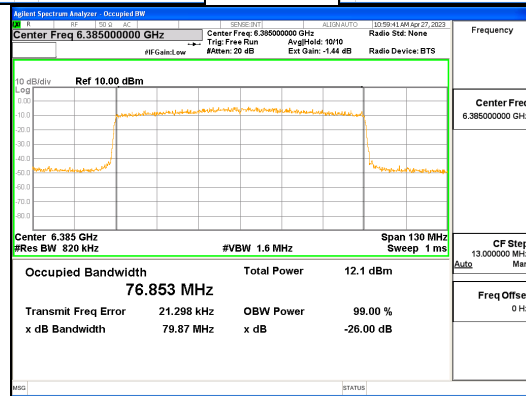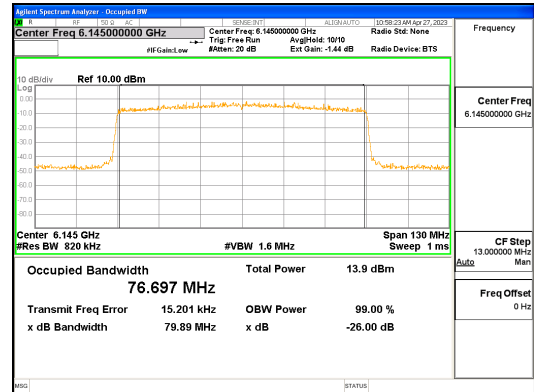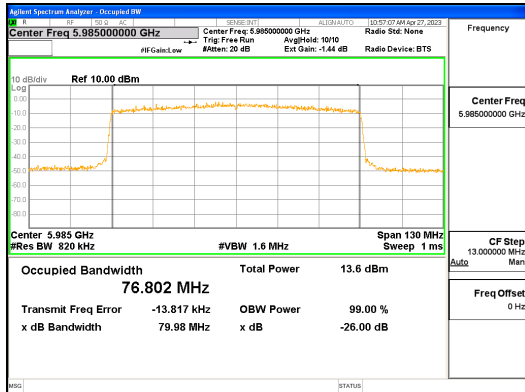

ANT1_802.11ax_HE80_996T_UNII 5



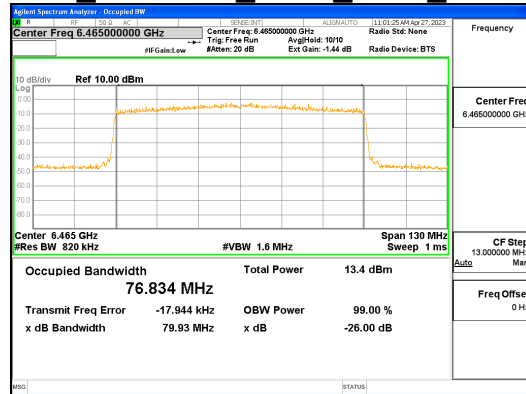


ANT1_802.11ax_HE80_996T_UNII 6





CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2023-00952
 Page (74) / (427) Pages

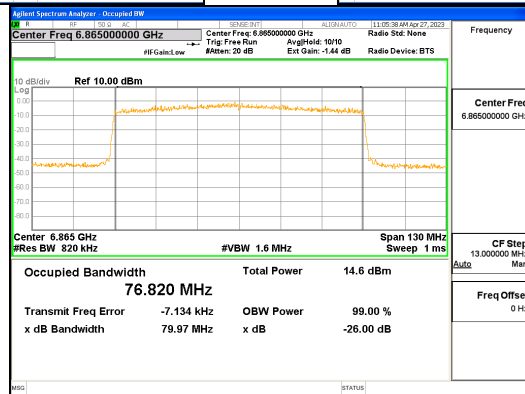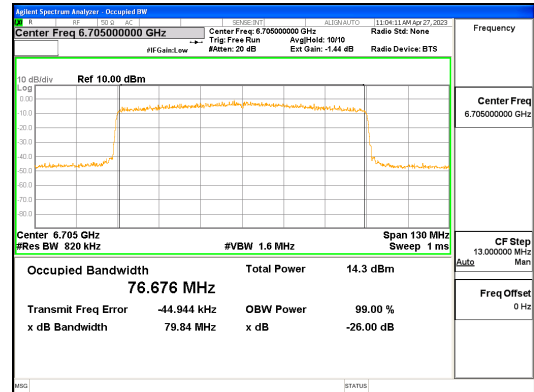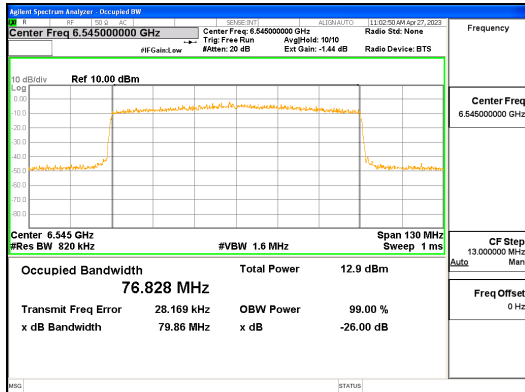

ANT1_802.11ax_HE80_996T_UNII 7

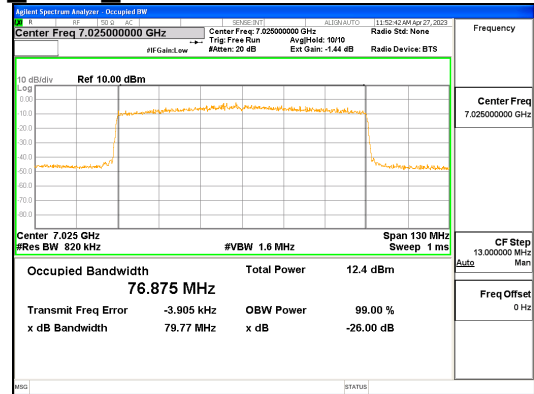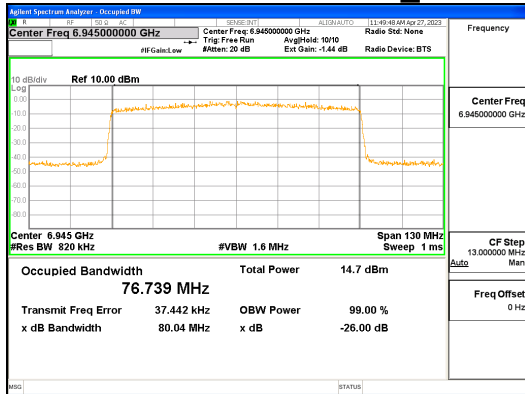

ANT1_802.11ax_HE80_996T_UNII 8

4.2 OUTPUT POWER

Test Procedures

<802.11a >


KDB 987594 – Section E

KDB 789033 – Section E.2.d (Method SA-2, Maximum Conducted Output Power)

KDB 662911 D01, D02 (Multiple Transmitter Output)

ANSI C63.10-2013 – Section 12.3.2.4

The transmitter output is connected to a spectrum analyzer and the analyzer's internal channel power integration function is used to integrate the power over a bandwidth greater than or equal to the 99% bandwidth.



Test Settings :

Center frequency = the highest, middle and the lowest channels

a) RBW = 1 MHz

b) VBW \geq 3 x RBW

c) Sweep time = auto

d) Detector = power averaging (rms)

e) Trace mode = Average at least 100

f) Duty cycle factor = $10\log(1/x)$

Test mode	Duty Cycle Factor (dB)
802.11	0.13

< 802.11ax mode >


KDB 987594 – Section E

KDB 789033 – Section E.3.a (Method PM, Maximum Conducted Output Power)

KDB 662911 D01, D02 (Multiple Transmitter Output)

ANSI C63.10-2013 – Section 12.3.3.1

The transmitter output is connected to a average power meter.



Test Settings :

Center frequency = the highest, middle and the lowest channels

a) Measure the average power of the transmitter.

b) Duty cycle factor = $10\log(1/x)$

Test mode	Duty Cycle Factor (dB)
802.11ax HE20/40/80 26T	0.21
802.11ax HE20/40/80 52T	0.22
802.11ax HE20/40/80 106T	0.23
802.11ax HE20 242T	0.27
802.11ax HE40 242T	0.26
802.11ax HE40 484T	0.27
802.11ax HE80 242T	0.27
802.11ax HE80 484T	0.28
802.11ax HE80 996T	0.29



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2023-00952
 Page (77) / (427) Pages

Limit

Operating Mode	ANT Configuration	ANT Gain (dBi)	Mode	Band	Limit (dBm)
SISO	ANT0, ANT1	1.27, -0.04	802.11a/ax	UNII 5	24.00 EIRP
				UNII 6	
				UNII 7	
				UNII 8	
MIMO (2Tx)	ANT0 + ANT1	3.65	802.11ax	UNII 5	
				UNII 6	
				UNII 7	
				UNII 8	

Note :

Per KDB 662911, the MIMO directional gain is calculated using the following formula, Where G_N is the gain of the nth antenna and N_{ANT} , the total number of antennas used.

$$\text{Directional gain} = 10 \log[(10^{G_1/20} + 10^{G_2/20} + \dots + 10^{G_N/20})^2 / N_{ANT}] \text{ dBi}$$



Test Data

ANT0(SISO)

Test Mode	Frequency (MHz)	Measured Output Power (dBm)	Duty cycle Factor (dB)	Antenna Gain (dBi)	Result Output Power (dBm)	Limit (dBm)	Margin (dB)
802.11a	5 975 MHz	7.58	0.13	1.27	8.98	24.00	15.02
	6 215 MHz	6.48	0.13		7.88	24.00	16.12
	6 375 MHz	6.36	0.13		7.76	24.00	16.24
	6 455 MHz	7.50	0.13		8.90	24.00	15.10
	6 535 MHz	5.52	0.13		6.92	24.00	17.08
	6 695 MHz	5.00	0.13		6.40	24.00	17.60
	6 855 MHz	5.77	0.13		7.17	24.00	16.83
	6 935 MHz	4.59	0.13		5.99	24.00	18.01
	7 105 MHz	4.32	0.13		5.72	24.00	18.28
	7 095 MHz	3.27	0.13		4.67	24.00	19.33
Measurement uncertainty		± 1.5 dB					

Test Mode	Frequency (MHz)	RU Index	Measured Output Power (dBm)	Duty cycle Factor (dB)	Antenna Gain (dBi)	Result Output Power (dBm)	Limit (dBm)	Margin (dB)
802.11ax _HE20 _26T	5 955	Low	-7.33	0.21	1.27	-5.85	24.00	29.85
		Mid	-7.65	0.21		-6.17	24.00	30.17
		High	-5.75	0.21		-4.27	24.00	28.27
	6 175	Low	-7.44	0.21		-5.96	24.00	29.96
		Mid	-8.06	0.21		-6.58	24.00	30.58
		High	-7.42	0.21		-5.94	24.00	29.94
	6 415	Low	-7.32	0.21		-5.84	24.00	29.84
		Mid	-6.85	0.21		-5.37	24.00	29.37
		High	-6.89	0.21		-5.41	24.00	29.41
	6 435	Low	-6.53	0.21		-5.05	24.00	29.05
		Mid	-6.84	0.21		-5.36	24.00	29.36
		High	-6.22	0.21		-4.74	24.00	28.74
	6 475	Low	-6.56	0.21		-5.08	24.00	29.08
		Mid	-6.56	0.21		-5.08	24.00	29.08
		High	-6.52	0.21		-5.04	24.00	29.04
6 515	Low	-6.23	0.21	-4.75	24.00	28.75		
	Mid	-6.64	0.21	-5.16	24.00	29.16		
	High	-6.47	0.21	-4.99	24.00	28.99		



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2023-00952
 Page (79) / (427) Pages

6 535	Low	-6.57	0.21		-5.09	24.00	29.09
	Mid	-6.34	0.21		-4.86	24.00	28.86
	High	-6.62	0.21		-5.14	24.00	29.14
6 695	Low	-7.13	0.21		-5.65	24.00	29.65
	Mid	-7.23	0.21		-5.75	24.00	29.75
	High	-6.88	0.21		-5.40	24.00	29.40
6 855	Low	-6.98	0.21		-5.50	24.00	29.50
	Mid	-6.67	0.21		-5.19	24.00	29.19
	High	-6.97	0.21		-5.49	24.00	29.49
6 875	Low	-6.95	0.21		-5.47	24.00	29.47
	Mid	-7.25	0.21		-5.77	24.00	29.77
	High	-7.03	0.21		-5.55	24.00	29.55
6 995	Low	-6.42	0.21		-4.94	24.00	28.94
	Mid	-6.71	0.21		-5.23	24.00	29.23
	High	-6.85	0.21		-5.37	24.00	29.37
7 095	Low	-7.34	0.21		-5.86	24.00	29.86
	Mid	-7.25	0.21		-5.77	24.00	29.77
	High	-7.01	0.21		-5.53	24.00	29.53
7 115	Low	-9.23	0.21		-7.75	24.00	31.75
	Mid	-9.22	0.21		-7.74	24.00	31.74
	High	-9.13	0.21		-7.65	24.00	31.65
Measurement uncertainty		± 1.5 dB					

Test Mode	Frequency (MHz)	RU Index	Measured Output Power (dBm)	Duty cycle Factor (dB)	Antenna Gain (dBi)	Result Output Power (dBm)	Limit (dBm)	Margin (dB)
802.11ax _HE20 _52T	5 955	Low	-5.14	0.22	1.27	-3.65	24.00	27.65
		Mid	-4.97	0.22		-3.48	24.00	27.48
		High	-4.93	0.22		-3.44	24.00	27.44
	6 175	Low	-6.70	0.22		-5.21	24.00	29.21
		Mid	-6.72	0.22		-5.23	24.00	29.23
		High	-6.73	0.22		-5.24	24.00	29.24
	6 415	Low	-6.08	0.22		-4.59	24.00	28.59
		Mid	-5.80	0.22		-4.31	24.00	28.31
		High	-5.84	0.22		-4.35	24.00	28.35
	6 435	Low	-5.50	0.22		-4.01	24.00	28.01
		Mid	-5.30	0.22		-3.81	24.00	27.81
		High	-5.30	0.22		-3.81	24.00	27.81
	6 475	Low	-6.37	0.22		-4.88	24.00	28.88



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2023-00952
 Page (80) / (427) Pages

	6 515	Mid	-5.09	0.22		-3.60	24.00	27.60		
		High	-5.17	0.22		-3.68	24.00	27.68		
		Low	-5.29	0.22		-3.80	24.00	27.80		
	6 535	Mid	-5.13	0.22		-3.64	24.00	27.64		
		High	-5.05	0.22		-3.56	24.00	27.56		
		Low	-5.35	0.22		-3.86	24.00	27.86		
	6 535	Mid	-5.22	0.22		-3.73	24.00	27.73		
		High	-4.97	0.22		-3.48	24.00	27.48		
		Low	-6.27	0.22		-4.78	24.00	28.78		
	6 695	Mid	-6.21	0.22		-4.72	24.00	28.72		
		High	-6.29	0.22		-4.80	24.00	28.80		
		Low	-5.70	0.22		-4.21	24.00	28.21		
	6 855	Mid	-5.49	0.22		-4.00	24.00	28.00		
		High	-5.50	0.22		-4.01	24.00	28.01		
		Low	-6.13	0.22		-4.64	24.00	28.64		
	6 875	Mid	-6.02	0.22		-4.53	24.00	28.53		
		High	-6.07	0.22		-4.58	24.00	28.58		
		Low	-4.76	0.22		-3.27	24.00	27.27		
	6 995	Mid	-4.87	0.22		-3.38	24.00	27.38		
		High	-4.74	0.22		-3.25	24.00	27.25		
		Low	-5.61	0.22		-4.12	24.00	28.12		
	7 095	Mid	-5.74	0.22		-4.25	24.00	28.25		
		High	-5.84	0.22		-4.35	24.00	28.35		
		Low	-5.75	0.22		-4.26	24.00	28.26		
	7 115	Mid	-5.86	0.22		-4.37	24.00	28.37		
		High	-5.80	0.22		-4.31	24.00	28.31		
		Measurement uncertainty					± 1.5 dB			

Test Mode	Frequency (MHz)	RU Index	Measured Output Power (dBm)	Duty cycle Factor (dB)	Antenna Gain (dBi)	Result Output Power (dBm)	Limit (dBm)	Margin (dB)
802.11ax _HE20 _106T	5 955	Low	-3.29	0.23	1.27	-1.79	24.00	25.79
		Mid	-	-				
		High	-3.11	0.23		-1.61	24.00	25.61
	6 175	Low	-5.31	0.23		-3.81	24.00	27.81
		Mid	-	-				
		High	-4.94	0.23		-3.44	24.00	27.44
	6 415	Low	-4.03	0.23		-2.53	24.00	26.53
		Mid	-	-				



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2023-00952
 Page (81) / (427) Pages

	High	-4.07	0.23		-2.57	24.00	26.57
6 435	Low	-2.94	0.23		-1.44	24.00	25.44
	Mid	-			-		
	High	-2.85	0.23		-1.35	24.00	25.35
6 475	Low	-2.98	0.23		-1.48	24.00	25.48
	Mid	-			-		
	High	-2.39	0.23		-0.89	24.00	24.89
6 515	Low	-2.74	0.23		-1.24	24.00	25.24
	Mid	-			-		
	High	-2.50	0.23		-1.00	24.00	25.00
6 535	Low	-2.78	0.23		-1.28	24.00	25.28
	Mid	-			-		
	High	-2.68	0.23		-1.18	24.00	25.18
6 695	Low	-4.00	0.23		-2.50	24.00	26.50
	Mid	-			-		
	High	-3.84	0.23		-2.34	24.00	26.34
6 855	Low	-3.05	0.23		-1.55	24.00	25.55
	Mid	-			-		
	High	-3.06	0.23		-1.56	24.00	25.56
6 875	Low	-3.18	0.23		-1.68	24.00	25.68
	Mid	-			-		
	High	-3.24	0.23		-1.74	24.00	25.74
6 995	Low	-2.16	0.23		-0.66	24.00	24.66
	Mid	-			-		
	High	-2.19	0.23		-0.69	24.00	24.69
7 095	Low	-3.56	0.23		-2.06	24.00	26.06
	Mid	-			-		
	High	-3.24	0.23		-1.74	24.00	25.74
7 115	Low	-3.18	0.23		-1.68	24.00	25.68
	Mid	-			-		
	High	-3.26	0.23		-1.76	24.00	25.76
Measurement uncertainty					± 1.5 dB		



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2023-00952
 Page (82) / (427) Pages

Test Mode	Frequency (MHz)	Measured Output Power (dBm)	Duty cycle Factor (dB)	Antenna Gain (dBi)	Result Output Power (dBm)	Limit (dBm)	Margin (dB)
802.11ax _HE20 _242T	5 955	-0.39	0.27	1.27	1.15	24.00	22.85
	6 175	-1.07	0.27		0.47	24.00	23.53
	6 415	-1.03	0.27		0.51	24.00	23.49
	6 435	0.04	0.27		1.58	24.00	22.42
	6 475	0.12	0.27		1.66	24.00	22.34
	6 515	0.13	0.27		1.67	24.00	22.33
	6 535	0.09	0.27		1.63	24.00	22.37
	6 695	-1.23	0.27		0.31	24.00	23.69
	6 855	-0.45	0.27		1.09	24.00	22.91
	6 875	-1.00	0.27		0.54	24.00	23.46
	6 995	-0.17	0.27		1.37	24.00	22.63
	7 095	-0.75	0.27		0.79	24.00	23.21
	7 115	-0.76	0.27		0.78	24.00	23.22
Measurement uncertainty		± 1.5 dB					



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2023-00952
 Page (83) / (427) Pages

Test Mode	Frequency (MHz)	RU Index	Measured Output Power (dBm)	Duty cycle Factor (dB)	Antenna Gain (dBi)	Result Output Power (dBm)	Limit (dBm)	Margin (dB)
802.11ax _HE40 _26T	5 965	Low	-7.67	0.21	1.27	-6.19	24.00	30.19
		Mid	-8.20	0.21		-6.72	24.00	30.72
		High	-5.27	0.21		-3.79	24.00	27.79
	6 165	Low	-5.30	0.21		-3.82	24.00	27.82
		Mid	-5.88	0.21		-4.40	24.00	28.40
		High	-5.29	0.21		-3.81	24.00	27.81
	6 405	Low	-6.25	0.21		-4.77	24.00	28.77
		Mid	-6.25	0.21		-4.77	24.00	28.77
		High	-6.23	0.21		-4.75	24.00	28.75
	6 445	Low	-5.58	0.21		-4.10	24.00	28.10
		Mid	-5.56	0.21		-4.08	24.00	28.08
		High	-5.62	0.21		-4.14	24.00	28.14
	6 485	Low	-5.44	0.21		-3.96	24.00	27.96
		Mid	-5.46	0.21		-3.98	24.00	27.98
		High	-5.48	0.21		-4.00	24.00	28.00
	6 525	Low	-6.36	0.21		-4.88	24.00	28.88
		Mid	-5.92	0.21		-4.44	24.00	28.44
		High	-6.06	0.21		-4.58	24.00	28.58
	6 685	Low	-4.71	0.21		-3.23	24.00	27.23
		Mid	-5.93	0.21		-4.45	24.00	28.45
		High	-5.16	0.21		-3.68	24.00	27.68
	6 845	Low	-6.27	0.21		-4.79	24.00	28.79
		Mid	-6.17	0.21		-4.69	24.00	28.69
		High	-6.06	0.21		-4.58	24.00	28.58
	6 885	Low	-5.17	0.21		-3.69	24.00	27.69
		Mid	-5.05	0.21		-3.57	24.00	27.57
		High	-5.30	0.21		-3.82	24.00	27.82
7 005	Low	-5.20	0.21	-3.72	24.00	27.72		
	Mid	-4.98	0.21	-3.50	24.00	27.50		
	High	-4.86	0.21	-3.38	24.00	27.38		
7 085	Low	-5.21	0.21	-3.73	24.00	27.73		
	Mid	-4.79	0.21	-3.31	24.00	27.31		
	High	-5.00	0.21	-3.52	24.00	27.52		
Measurement uncertainty			± 1.5 dB					



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2023-00952
 Page (84) / (427) Pages

Test Mode	Frequency (MHz)	RU Index	Measured Output Power (dBm)	Duty cycle Factor (dB)	Antenna Gain (dBi)	Result Output Power (dBm)	Limit (dBm)	Margin (dB)
802.11ax _HE40 _52T	5 965	Low	-4.67	0.22	1.27	-3.18	24.00	27.18
		Mid	-4.36	0.22		-2.87	24.00	26.87
		High	-4.50	0.22		-3.01	24.00	27.01
	6 165	Low	-4.82	0.22		-3.33	24.00	27.33
		Mid	-4.56	0.22		-3.07	24.00	27.07
		High	-4.89	0.22		-3.40	24.00	27.40
	6 405	Low	-5.17	0.22		-3.68	24.00	27.68
		Mid	-4.85	0.22		-3.36	24.00	27.36
		High	-5.08	0.22		-3.59	24.00	27.59
	6 445	Low	-4.73	0.22		-3.24	24.00	27.24
		Mid	-4.21	0.22		-2.72	24.00	26.72
		High	-4.45	0.22		-2.96	24.00	26.96
	6 485	Low	-4.37	0.22		-2.88	24.00	26.88
		Mid	-4.28	0.22		-2.79	24.00	26.79
		High	-4.39	0.22		-2.90	24.00	26.90
	6 525	Low	-4.83	0.22		-3.34	24.00	27.34
		Mid	-4.76	0.22		-3.27	24.00	27.27
		High	-4.68	0.22		-3.19	24.00	27.19
	6 685	Low	-4.20	0.22		-2.71	24.00	26.71
		Mid	-4.28	0.22		-2.79	24.00	26.79
		High	-4.56	0.22		-3.07	24.00	27.07
	6 845	Low	-4.94	0.22		-3.45	24.00	27.45
		Mid	-4.66	0.22		-3.17	24.00	27.17
		High	-5.04	0.22		-3.55	24.00	27.55
	6 885	Low	-4.19	0.22		-2.70	24.00	26.70
		Mid	-3.94	0.22		-2.45	24.00	26.45
		High	-4.17	0.22		-2.68	24.00	26.68
7 005	Low	-4.18	0.22	-2.69	24.00	26.69		
	Mid	-3.77	0.22	-2.28	24.00	26.28		
	High	-4.06	0.22	-2.57	24.00	26.57		
7 085	Low	-4.14	0.22	-2.65	24.00	26.65		
	Mid	-3.74	0.22	-2.25	24.00	26.25		
	High	-3.98	0.22	-2.49	24.00	26.49		
Measurement uncertainty			± 1.5 dB					



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2023-00952
 Page (85) / (427) Pages

Test Mode	Frequency (MHz)	RU Index	Measured Output Power (dBm)	Duty cycle Factor (dB)	Antenna Gain (dBi)	Result Output Power (dBm)	Limit (dBm)	Margin (dB)
802.11ax _HE40 _106T	5 965	Low	-2.78	0.23	1.27	-1.28	24.00	25.28
		Mid	-2.85	0.23		-1.35	24.00	25.35
		High	-2.63	0.23		-1.13	24.00	25.13
	6 165	Low	-3.18	0.23		-1.68	24.00	25.68
		Mid	-3.15	0.23		-1.65	24.00	25.65
		High	-3.21	0.23		-1.71	24.00	25.71
	6 405	Low	-3.37	0.23		-1.87	24.00	25.87
		Mid	-3.05	0.23		-1.55	24.00	25.55
		High	-2.94	0.23		-1.44	24.00	25.44
	6 445	Low	-2.16	0.23		-0.66	24.00	24.66
		Mid	-1.89	0.23		-0.39	24.00	24.39
		High	-1.83	0.23		-0.33	24.00	24.33
	6 485	Low	-1.94	0.23		-0.44	24.00	24.44
		Mid	-1.85	0.23		-0.35	24.00	24.35
		High	-1.79	0.23		-0.29	24.00	24.29
	6 525	Low	-2.37	0.23		-0.87	24.00	24.87
		Mid	-2.20	0.23		-0.70	24.00	24.70
		High	-2.10	0.23		-0.60	24.00	24.60
	6 685	Low	-2.19	0.23		-0.69	24.00	24.69
		Mid	-1.96	0.23		-0.46	24.00	24.46
		High	-1.94	0.23		-0.44	24.00	24.44
	6 845	Low	-2.60	0.23		-1.10	24.00	25.10
		Mid	-2.49	0.23		-0.99	24.00	24.99
		High	-2.47	0.23		-0.97	24.00	24.97
	6 885	Low	-2.19	0.23		-0.69	24.00	24.69
		Mid	-2.07	0.23		-0.57	24.00	24.57
		High	-2.01	0.23		-0.51	24.00	24.51
7 005	Low	-1.96	0.23	-0.46	24.00	24.46		
	Mid	-1.71	0.23	-0.21	24.00	24.21		
	High	-2.28	0.23	-0.78	24.00	24.78		
7 085	Low	-2.03	0.23	-0.53	24.00	24.53		
	Mid	-1.60	0.23	-0.10	24.00	24.10		
	High	-1.79	0.23	-0.29	24.00	24.29		
Measurement uncertainty			± 1.5 dB					



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2023-00952
 Page (86) / (427) Pages

Test Mode	Frequency (MHz)	RU Index	Measured Output Power (dBm)	Duty cycle Factor (dB)	Antenna Gain (dBi)	Result Output Power (dBm)	Limit (dBm)	Margin (dB)
802.11ax _HE40 _242T	5 965	Low	0.68	0.26	1.27	2.21	24.00	21.79
		Mid	-			-		
		High	0.86	0.26		2.39	24.00	21.61
	6 165	Low	0.44	0.26		1.97	24.00	22.03
		Mid	-			-		
		High	0.45	0.26		1.98	24.00	22.02
	6 405	Low	0.50	0.26		2.03	24.00	21.97
		Mid	-			-		
		High	0.58	0.26		2.11	24.00	21.89
	6 445	Low	0.98	0.26		2.51	24.00	21.49
		Mid	-			-		
		High	1.07	0.26		2.60	24.00	21.40
	6 485	Low	1.09	0.26		2.62	24.00	21.38
		Mid	-			-		
		High	1.08	0.26		2.61	24.00	21.39
	6 525	Low	1.24	0.26		2.77	24.00	21.23
		Mid	-			-		
		High	1.08	0.26		2.61	24.00	21.39
	6 685	Low	1.38	0.26		2.91	24.00	21.09
		Mid	-			-		
		High	1.25	0.26		2.78	24.00	21.22
	6 845	Low	0.88	0.26		2.41	24.00	21.59
		Mid	-			-		
		High	1.04	0.26		2.57	24.00	21.43
	6 885	Low	0.86	0.26		2.39	24.00	21.61
		Mid	-			-		
		High	0.87	0.26		2.40	24.00	21.60
	7 005	Low	1.14	0.26		2.67	24.00	21.33
		Mid	-			-		
		High	1.00	0.26		2.53	24.00	21.47
7 085	Low	1.23	0.26	2.76	24.00	21.24		
	Mid	-		-				
	High	1.13	0.26	2.66	24.00	21.34		
Measurement uncertainty		± 1.5 dB						



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2023-00952
 Page (87) / (427) Pages

Test Mode	Frequency (MHz)	Measured Output Power (dBm)	Duty cycle Factor (dB)	Antenna Gain (dBi)	Result Output Power (dBm)	Limit (dBm)	Margin (dB)
802.11ax _HE40 _484T	5 965	1.52	0.27	1.27	3.06	24.00	20.94
	6 165	-0.40	0.27		1.14	24.00	22.86
	6 405	0.68	0.27		2.22	24.00	21.78
	6 445	1.66	0.27		3.20	24.00	20.80
	6 485	1.81	0.27		3.35	24.00	20.65
	6 525	2.11	0.27		3.65	24.00	20.35
	6 685	1.06	0.27		2.60	24.00	21.40
	6 845	1.15	0.27		2.69	24.00	21.31
	6 885	1.30	0.27		2.84	24.00	21.16
	7 005	1.89	0.27		3.43	24.00	20.57
	7 085	0.52	0.27	2.06	24.00	21.94	
Measurement uncertainty		± 1.5 dB					



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2023-00952
 Page (88) / (427) Pages

Test Mode	Frequency (MHz)	RU Index	Measured Output Power (dBm)	Duty cycle Factor (dB)	Antenna Gain (dBi)	Result Output Power (dBm)	Limit (dBm)	Margin (dB)
802.11ax _HE80 _26T	5 985	Low	-5.36	0.21	1.27	-3.88	24.00	27.88
		Mid	-5.54	0.21		-4.06	24.00	28.06
		High	-5.14	0.21		-3.66	24.00	27.66
	6 145	Low	-5.59	0.21		-4.11	24.00	28.11
		Mid	-5.69	0.21		-4.21	24.00	28.21
		High	-5.59	0.21		-4.11	24.00	28.11
	6 385	Low	-6.19	0.21		-4.71	24.00	28.71
		Mid	-6.20	0.21		-4.72	24.00	28.72
		High	-6.17	0.21		-4.69	24.00	28.69
	6 465	Low	-5.24	0.21		-3.76	24.00	27.76
		Mid	-5.33	0.21		-3.85	24.00	27.85
		High	-5.29	0.21		-3.81	24.00	27.81
	6 545	Low	-5.56	0.21		-4.08	24.00	28.08
		Mid	-5.53	0.21		-4.05	24.00	28.05
		High	-5.22	0.21		-3.74	24.00	27.74
	6 705	Low	-4.75	0.21		-3.27	24.00	27.27
		Mid	-5.19	0.21		-3.71	24.00	27.71
		High	-5.03	0.21		-3.55	24.00	27.55
	6 865	Low	-6.01	0.21		-4.53	24.00	28.53
		Mid	-6.21	0.21		-4.73	24.00	28.73
		High	-6.50	0.21		-5.02	24.00	29.02
	6 945	Low	-5.26	0.21		-3.78	24.00	27.78
		Mid	-5.30	0.21		-3.82	24.00	27.82
		High	-5.26	0.21		-3.78	24.00	27.78
	7 025	Low	-5.13	0.21		-3.65	24.00	27.65
		Mid	-4.92	0.21		-3.44	24.00	27.44
		High	-5.16	0.21		-3.68	24.00	27.68
Measurement uncertainty			± 1.5 dB					



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2023-00952
 Page (89) / (427) Pages

Test Mode	Frequency (MHz)	RU Index	Measured Output Power (dBm)	Duty cycle Factor (dB)	Antenna Gain (dBi)	Result Output Power (dBm)	Limit (dBm)	Margin (dB)
802.11ax _HE80 _52T	5 985	Low	-4.63	0.22	1.27	-3.14	24.00	27.14
		Mid	-4.42	0.22		-2.93	24.00	26.93
		High	-4.37	0.22		-2.88	24.00	26.88
	6 145	Low	-4.63	0.22		-3.14	24.00	27.14
		Mid	-4.73	0.22		-3.24	24.00	27.24
		High	-4.59	0.22		-3.10	24.00	27.10
	6 385	Low	-5.05	0.22		-3.56	24.00	27.56
		Mid	-5.01	0.22		-3.52	24.00	27.52
		High	-4.87	0.22		-3.38	24.00	27.38
	6 465	Low	-4.28	0.22		-2.79	24.00	26.79
		Mid	-4.28	0.22		-2.79	24.00	26.79
		High	-4.10	0.22		-2.61	24.00	26.61
	6 545	Low	-4.51	0.22		-3.02	24.00	27.02
		Mid	-4.20	0.22		-2.71	24.00	26.71
		High	-4.20	0.22		-2.71	24.00	26.71
	6 705	Low	-4.19	0.22		-2.70	24.00	26.70
		Mid	-4.49	0.22		-3.00	24.00	27.00
		High	-4.50	0.22		-3.01	24.00	27.01
	6 865	Low	-4.78	0.22		-3.29	24.00	27.29
		Mid	-4.89	0.22		-3.40	24.00	27.40
		High	-4.74	0.22		-3.25	24.00	27.25
	6 945	Low	-4.12	0.22		-2.63	24.00	26.63
		Mid	-3.93	0.22		-2.44	24.00	26.44
		High	-3.69	0.22		-2.20	24.00	26.20
	7 025	Low	-3.83	0.22		-2.34	24.00	26.34
		Mid	-3.66	0.22		-2.17	24.00	26.17
		High	-3.86	0.22		-2.37	24.00	26.37
Measurement uncertainty			± 1.5 dB					



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2023-00952
 Page (90) / (427) Pages

Test Mode	Frequency (MHz)	RU Index	Measured Output Power (dBm)	Duty cycle Factor (dB)	Antenna Gain (dBi)	Result Output Power (dBm)	Limit (dBm)	Margin (dB)
802.11ax _HE80 _106T	5 985	Low	-2.69	0.23	1.27	-1.19	24.00	25.19
		Mid	-2.78	0.23		-1.28	24.00	25.28
		High	-2.66	0.23		-1.16	24.00	25.16
	6 145	Low	-3.02	0.23		-1.52	24.00	25.52
		Mid	-3.04	0.23		-1.54	24.00	25.54
		High	-3.15	0.23		-1.65	24.00	25.65
	6 385	Low	-3.17	0.23		-1.67	24.00	25.67
		Mid	-2.79	0.23		-1.29	24.00	25.29
		High	-2.74	0.23		-1.24	24.00	25.24
	6 465	Low	-2.17	0.23		-0.67	24.00	24.67
		Mid	-1.61	0.23		-0.11	24.00	24.11
		High	-1.57	0.23		-0.07	24.00	24.07
	6 545	Low	-1.93	0.23		-0.43	24.00	24.43
		Mid	-1.83	0.23		-0.33	24.00	24.33
		High	-1.91	0.23		-0.41	24.00	24.41
	6 705	Low	-1.70	0.23		-0.20	24.00	24.20
		Mid	-2.04	0.23		-0.54	24.00	24.54
		High	-2.10	0.23		-0.60	24.00	24.60
	6 865	Low	-2.52	0.23		-1.02	24.00	25.02
		Mid	-2.48	0.23		-0.98	24.00	24.98
		High	-2.25	0.23		-0.75	24.00	24.75
	6 945	Low	-2.11	0.23		-0.61	24.00	24.61
		Mid	-1.86	0.23		-0.36	24.00	24.36
		High	-1.83	0.23		-0.33	24.00	24.33
	7 025	Low	-1.84	0.23		-0.34	24.00	24.34
		Mid	-1.74	0.23		-0.24	24.00	24.24
		High	-1.65	0.23		-0.15	24.00	24.15
Measurement uncertainty			± 1.5 dB					



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2023-00952
 Page (91) / (427) Pages

Test Mode	Frequency (MHz)	RU Index	Measured Output Power (dBm)	Duty cycle Factor (dB)	Antenna Gain (dBi)	Result Output Power (dBm)	Limit (dBm)	Margin (dB)
802.11ax _HE80 _242T	5 985	Low	0.75	0.27	1.27	2.29	24.00	21.71
		Mid	0.80	0.27		2.34	24.00	21.66
		High	0.87	0.27		2.41	24.00	21.59
	6 145	Low	0.44	0.27		1.98	24.00	22.02
		Mid	0.54	0.27		2.08	24.00	21.92
		High	0.63	0.27		2.17	24.00	21.83
	6 385	Low	0.22	0.27		1.76	24.00	22.24
		Mid	0.39	0.27		1.93	24.00	22.07
		High	0.61	0.27		2.15	24.00	21.85
	6 465	Low	0.91	0.27		2.45	24.00	21.55
		Mid	1.20	0.27		2.74	24.00	21.26
		High	1.16	0.27		2.70	24.00	21.30
	6 545	Low	1.55	0.27		3.09	24.00	20.91
		Mid	1.48	0.27		3.02	24.00	20.98
		High	0.95	0.27		2.49	24.00	21.51
	6 705	Low	1.28	0.27		2.82	24.00	21.18
		Mid	1.28	0.27		2.82	24.00	21.18
		High	1.23	0.27		2.77	24.00	21.23
	6 865	Low	0.87	0.27		2.41	24.00	21.59
		Mid	1.02	0.27		2.56	24.00	21.44
		High	0.87	0.27		2.41	24.00	21.59
	6 945	Low	0.95	0.27		2.49	24.00	21.51
		Mid	1.08	0.27		2.62	24.00	21.38
		High	0.96	0.27		2.50	24.00	21.50
	7 025	Low	1.26	0.27		2.80	24.00	21.20
		Mid	1.22	0.27		2.76	24.00	21.24
		High	1.25	0.27		2.79	24.00	21.21
Measurement uncertainty			± 1.5 dB					



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2023-00952
 Page (92) / (427) Pages

Test Mode	Frequency (MHz)	RU Index	Measured Output Power (dBm)	Duty cycle Factor (dB)	Antenna Gain (dBi)	Result Output Power (dBm)	Limit (dBm)	Margin (dB)
802.11ax _HE80 _484T	5 985	Low	3.49	0.28	1.27	5.04	24.00	18.96
		Mid	-			-		
		High	3.64	0.28		5.19	24.00	18.81
	6 145	Low	3.04	0.28		4.59	24.00	19.41
		Mid	-			-		
		High	3.24	0.28		4.79	24.00	19.21
	6 385	Low	3.20	0.28		4.75	24.00	19.25
		Mid	-			-		
		High	3.33	0.28		4.88	24.00	19.12
	6 465	Low	4.37	0.28		5.92	24.00	18.08
		Mid	-			-		
		High	4.79	0.28		6.34	24.00	17.66
	6 545	Low	4.77	0.28		6.32	24.00	17.68
		Mid	-			-		
		High	4.58	0.28		6.13	24.00	17.87
	6 705	Low	4.71	0.28		6.26	24.00	17.74
		Mid	-			-		
		High	4.60	0.28		6.15	24.00	17.85
	6 865	Low	4.26	0.28		5.81	24.00	18.19
		Mid	-			-		
		High	4.50	0.28		6.05	24.00	17.95
	6 945	Low	3.63	0.28		5.18	24.00	18.82
		Mid	-			-		
		High	3.70	0.28		5.25	24.00	18.75
	7 025	Low	3.80	0.28		5.35	24.00	18.65
		Mid	-			-		
		High	3.88	0.28		5.43	24.00	18.57
Measurement uncertainty			± 1.5 dB					



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2023-00952
 Page (93) / (427) Pages

Test Mode	Frequency (MHz)	Measured Output Power (dBm)	Duty cycle Factor (dB)	Antenna Gain (dBi)	Result Output Power (dBm)	Limit (dBm)	Margin (dB)
802.11ax _HE80 _996T	5 985	5.87	0.29	1.27	7.43	24.00	16.57
	6 145	3.69	0.29		5.25	24.00	18.75
	6 385	4.80	0.29		6.36	24.00	17.64
	6 465	5.92	0.29		7.48	24.00	16.52
	6 545	6.04	0.29		7.60	24.00	16.40
	6 705	5.08	0.29		6.64	24.00	17.36
	6 865	6.12	0.29		7.68	24.00	16.32
	6 945	5.19	0.29		6.75	24.00	17.25
	7 025	5.14	0.29		6.70	24.00	17.30
Measurement uncertainty		± 1.5 dB					



ANT1(SISO)

Test Mode	Frequency (MHz)	Measured Output Power (dBm)	Duty cycle Factor (dB)	Antenna Gain (dBi)	Result Output Power (dBm)	Limit (dBm)	Margin (dB)
802.11a	5 975 MHz	8.77	0.13	-0.04	8.86	24.00	15.14
	6 215 MHz	8.44	0.13		8.53	24.00	15.47
	6 375 MHz	7.67	0.13		7.76	24.00	16.24
	6 455 MHz	8.66	0.13		8.75	24.00	15.25
	6 535 MHz	5.78	0.13		5.87	24.00	18.13
	6 695 MHz	7.28	0.13		7.37	24.00	16.63
	6 855 MHz	8.25	0.13		8.34	24.00	15.66
	6 935 MHz	8.31	0.13		8.40	24.00	15.60
	7 105 MHz	6.24	0.13		6.33	24.00	17.67
	7 095 MHz	4.68	0.13		4.77	24.00	19.23
Measurement uncertainty		± 1.5 dB					

Test Mode	Frequency (MHz)	RU Index	Measured Output Power (dBm)	Duty cycle Factor (dB)	Antenna Gain (dBi)	Result Output Power (dBm)	Limit (dBm)	Margin (dB)
802.11ax _HE20 _26T	5 955	Low	-4.84	0.21	-0.04	-4.67	24.00	28.67
		Mid	-4.92	0.21		-4.75	24.00	28.75
		High	-4.72	0.21		-4.55	24.00	28.55
	6 175	Low	-4.51	0.21		-4.34	24.00	28.34
		Mid	-4.32	0.21		-4.15	24.00	28.15
		High	-4.23	0.21		-4.06	24.00	28.06
	6 415	Low	-5.47	0.21		-5.30	24.00	29.30
		Mid	-5.69	0.21		-5.52	24.00	29.52
		High	-5.48	0.21		-5.31	24.00	29.31
	6 435	Low	-5.34	0.21		-5.17	24.00	29.17
		Mid	-5.10	0.21		-4.93	24.00	28.93
		High	-4.95	0.21		-4.78	24.00	28.78
	6 475	Low	-4.94	0.21		-4.77	24.00	28.77
		Mid	-5.28	0.21		-5.11	24.00	29.11
		High	-4.92	0.21		-4.75	24.00	28.75
	6 515	Low	-5.48	0.21		-5.31	24.00	29.31
		Mid	-5.43	0.21		-5.26	24.00	29.26
		High	-5.72	0.21		-5.55	24.00	29.55
	6 535	Low	-6.10	0.21		-5.93	24.00	29.93
		Mid	-6.06	0.21		-5.89	24.00	29.89



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2023-00952
 Page (95) / (427) Pages

	6 695	High	-4.30	0.21		-4.13	24.00	28.13
		Low	-4.40	0.21		-4.23	24.00	28.23
		Mid	-4.65	0.21		-4.48	24.00	28.48
	6 855	High	-4.64	0.21		-4.47	24.00	28.47
		Low	-4.19	0.21		-4.02	24.00	28.02
		Mid	-4.50	0.21		-4.33	24.00	28.33
	6 875	High	-4.51	0.21		-4.34	24.00	28.34
		Low	-4.26	0.21		-4.09	24.00	28.09
		Mid	-4.54	0.21		-4.37	24.00	28.37
	6 995	High	-4.56	0.21		-4.39	24.00	28.39
		Low	-4.56	0.21		-4.39	24.00	28.39
		Mid	-4.82	0.21		-4.65	24.00	28.65
	7 095	High	-4.58	0.21		-4.41	24.00	28.41
		Low	-5.98	0.21		-5.81	24.00	29.81
		Mid	-6.29	0.21		-6.12	24.00	30.12
	7 115	High	-6.17	0.21		-6.00	24.00	30.00
		Low	-8.06	0.21		-7.89	24.00	31.89
		Mid	-8.42	0.21		-8.25	24.00	32.25
		High	-8.08	0.21	-7.91	24.00	31.91	
Measurement uncertainty		± 1.5 dB						

Test Mode	Frequency (MHz)	RU Index	Measured Output Power (dBm)	Duty cycle Factor (dB)	Antenna Gain (dBi)	Result Output Power (dBm)	Limit (dBm)	Margin (dB)
802.11ax _HE20 _52T	5 955	Low	-5.76	0.22	-0.04	-5.58	24.00	29.58
		Mid	-5.63	0.22		-5.45	24.00	29.45
		High	-5.54	0.22		-5.36	24.00	29.36
	6 175	Low	-4.21	0.22		-4.03	24.00	28.03
		Mid	-4.88	0.22		-4.70	24.00	28.70
		High	-4.94	0.22		-4.76	24.00	28.76
	6 415	Low	-6.05	0.22		-5.87	24.00	29.87
		Mid	-5.82	0.22		-5.64	24.00	29.64
		High	-5.95	0.22		-5.77	24.00	29.77
	6 435	Low	-5.52	0.22		-5.34	24.00	29.34
		Mid	-5.47	0.22		-5.29	24.00	29.29
		High	-5.45	0.22		-5.27	24.00	29.27
	6 475	Low	-5.71	0.22		-5.53	24.00	29.53
		Mid	-5.68	0.22		-5.50	24.00	29.50
		High	-5.71	0.22		-5.53	24.00	29.53



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2023-00952
 Page (96) / (427) Pages

	6 515	Low	-6.41	0.22		-6.23	24.00	30.23
		Mid	-6.28	0.22		-6.10	24.00	30.10
		High	-6.19	0.22		-6.01	24.00	30.01
	6 535	Low	-6.73	0.22		-6.55	24.00	30.55
		Mid	-6.75	0.22		-6.57	24.00	30.57
		High	-6.57	0.22		-6.39	24.00	30.39
	6 695	Low	-5.92	0.22		-5.74	24.00	29.74
		Mid	-5.77	0.22		-5.59	24.00	29.59
		High	-5.75	0.22		-5.57	24.00	29.57
	6 855	Low	-4.35	0.22		-4.17	24.00	28.17
		Mid	-4.21	0.22		-4.03	24.00	28.03
		High	-4.41	0.22		-4.23	24.00	28.23
	6 875	Low	-4.81	0.22		-4.63	24.00	28.63
		Mid	-4.66	0.22		-4.48	24.00	28.48
		High	-4.74	0.22		-4.56	24.00	28.56
	6 995	Low	-4.89	0.22		-4.71	24.00	28.71
		Mid	-4.55	0.22		-4.37	24.00	28.37
		High	-4.98	0.22		-4.80	24.00	28.80
	7 095	Low	-6.66	0.22		-6.48	24.00	30.48
		Mid	-6.65	0.22		-6.47	24.00	30.47
		High	-6.59	0.22		-6.41	24.00	30.41
	7 115	Low	-6.80	0.22		-6.62	24.00	30.62
		Mid	-6.56	0.22		-6.38	24.00	30.38
		High	-6.60	0.22		-6.42	24.00	30.42
Measurement uncertainty					± 1.5 dB			

Test Mode	Frequency (MHz)	RU Index	Measured Output Power (dBm)	Duty cycle Factor (dB)	Antenna Gain (dBi)	Result Output Power (dBm)	Limit (dBm)	Margin (dB)
802.11ax _HE20 _106T	5 955	Low	-2.79	0.23	-0.04	-2.60	24.00	26.60
		Mid	-	-		-		
		High	-2.44	0.23		-2.25	24.00	26.25
	6 175	Low	-2.26	0.23		-2.07	24.00	26.07
		Mid	-	-		-		
		High	-1.89	0.23		-1.70	24.00	25.70
	6 415	Low	-3.82	0.23		-3.63	24.00	27.63
		Mid	-	-		-		
		High	-3.76	0.23		-3.57	24.00	27.57
	6 435	Low	-2.72	0.23		-2.53	24.00	26.53



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2023-00952
 Page (97) / (427) Pages

		Mid	-		-		
		High	-2.75	0.23	-2.56	24.00	26.56
6 475		Low	-2.80	0.23	-2.61	24.00	26.61
		Mid	-		-		
6 515		High	-2.83	0.23	-2.64	24.00	26.64
		Low	-3.36	0.23	-3.17	24.00	27.17
6 535		Mid	-		-		
		High	-3.57	0.23	-3.38	24.00	27.38
6 695		Low	-3.74	0.23	-3.55	24.00	27.55
		Mid	-		-		
6 855		High	-3.24	0.23	-3.05	24.00	27.05
		Low	-2.26	0.23	-2.07	24.00	26.07
6 875		Mid	-		-		
		High	-2.20	0.23	-2.01	24.00	26.01
6 995		Low	-1.13	0.23	-0.94	24.00	24.94
		Mid	-		-		
7 095		High	-1.19	0.23	-1.00	24.00	25.00
		Low	-1.04	0.23	-0.85	24.00	24.85
7 115		Mid	-		-		
		High	-0.98	0.23	-0.79	24.00	24.79
		Low	-0.84	0.23	-0.65	24.00	24.65
		Mid	-		-		
		High	-0.95	0.23	-0.76	24.00	24.76
		Low	-2.25	0.23	-2.06	24.00	26.06
		Mid	-		-		
		High	-2.43	0.23	-2.24	24.00	26.24
		Low	-2.43	0.23	-2.24	24.00	26.24
		Mid	-		-		
		High	-2.42	0.23	-2.23	24.00	26.23
		Measurement uncertainty				± 1.5 dB	



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2023-00952
 Page (98) / (427) Pages

Test Mode	Frequency (MHz)	Measured Output Power (dBm)	Duty cycle Factor (dB)	Antenna Gain (dBi)	Result Output Power (dBm)	Limit (dBm)	Margin (dB)
802.11ax _HE20 _242T	5 955	0.21	0.27	-0.04	0.44	24.00	23.56
	6 175	0.90	0.27		1.13	24.00	22.87
	6 415	-0.93	0.27		-0.70	24.00	24.70
	6 435	0.03	0.27		0.26	24.00	23.74
	6 475	-0.27	0.27		-0.04	24.00	24.04
	6 515	-0.71	0.27		-0.48	24.00	24.48
	6 535	-0.90	0.27		-0.67	24.00	24.67
	6 695	0.46	0.27		0.69	24.00	23.31
	6 855	1.64	0.27		1.87	24.00	22.13
	6 875	1.23	0.27		1.46	24.00	22.54
	6 995	1.41	0.27		1.64	24.00	22.36
	7 095	0.10	0.27		0.33	24.00	23.67
	7 115	0.21	0.27		0.44	24.00	23.56
Measurement uncertainty		± 1.5 dB					



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2023-00952
 Page (99) / (427) Pages

Test Mode	Frequency (MHz)	RU Index	Measured Output Power (dBm)	Duty cycle Factor (dB)	Antenna Gain (dBi)	Result Output Power (dBm)	Limit (dBm)	Margin (dB)
802.11ax _HE40 _26T	5 965	Low	-6.10	0.21	-0.04	-5.93	24.00	29.93
		Mid	-5.92	0.21		-5.75	24.00	29.75
		High	-5.83	0.21		-5.66	24.00	29.66
	6 165	Low	-6.10	0.21		-5.93	24.00	29.93
		Mid	-6.15	0.21		-5.98	24.00	29.98
		High	-6.38	0.21		-6.21	24.00	30.21
	6 405	Low	-5.78	0.21		-5.61	24.00	29.61
		Mid	-5.46	0.21		-5.29	24.00	29.29
		High	-5.80	0.21		-5.63	24.00	29.63
	6 445	Low	-5.25	0.21		-5.08	24.00	29.08
		Mid	-4.67	0.21		-4.50	24.00	28.50
		High	-5.24	0.21		-5.07	24.00	29.07
	6 485	Low	-5.24	0.21		-5.07	24.00	29.07
		Mid	-4.93	0.21		-4.76	24.00	28.76
		High	-5.24	0.21		-5.07	24.00	29.07
	6 525	Low	-5.79	0.21		-5.62	24.00	29.62
		Mid	-5.83	0.21		-5.66	24.00	29.66
		High	-5.76	0.21		-5.59	24.00	29.59
	6 685	Low	-5.79	0.21		-5.62	24.00	29.62
		Mid	-5.95	0.21		-5.78	24.00	29.78
		High	-6.22	0.21		-6.05	24.00	30.05
	6 845	Low	-6.68	0.21		-6.51	24.00	30.51
		Mid	-6.43	0.21		-6.26	24.00	30.26
		High	-6.83	0.21		-6.66	24.00	30.66
	6 885	Low	-5.80	0.21		-5.63	24.00	29.63
		Mid	-5.38	0.21		-5.21	24.00	29.21
		High	-5.70	0.21		-5.53	24.00	29.53
7 005	Low	-5.83	0.21	-5.66	24.00	29.66		
	Mid	-5.68	0.21	-5.51	24.00	29.51		
	High	-5.91	0.21	-5.74	24.00	29.74		
7 085	Low	-6.07	0.21	-5.90	24.00	29.90		
	Mid	-5.57	0.21	-5.40	24.00	29.40		
	High	-6.09	0.21	-5.92	24.00	29.92		
Measurement uncertainty			± 1.5 dB					



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2023-00952
 Page (100) / (427) Pages

Test Mode	Frequency (MHz)	RU Index	Measured Output Power (dBm)	Duty cycle Factor (dB)	Antenna Gain (dBi)	Result Output Power (dBm)	Limit (dBm)	Margin (dB)
802.11ax _HE40 _52T	5 965	Low	-6.48	0.22	-0.04	-6.30	24.00	30.30
		Mid	-5.92	0.22		-5.74	24.00	29.74
		High	-6.21	0.22		-6.03	24.00	30.03
	6 165	Low	-6.45	0.22		-6.27	24.00	30.27
		Mid	-6.02	0.22		-5.84	24.00	29.84
		High	-6.15	0.22		-5.97	24.00	29.97
	6 405	Low	-6.09	0.22		-5.91	24.00	29.91
		Mid	-5.84	0.22		-5.66	24.00	29.66
		High	-5.94	0.22		-5.76	24.00	29.76
	6 445	Low	-4.80	0.22		-4.62	24.00	28.62
		Mid	-5.58	0.22		-5.40	24.00	29.40
		High	-5.76	0.22		-5.58	24.00	29.58
	6 485	Low	-5.90	0.22		-5.72	24.00	29.72
		Mid	-5.51	0.22		-5.33	24.00	29.33
		High	-5.90	0.22		-5.72	24.00	29.72
	6 525	Low	-6.46	0.22		-6.28	24.00	30.28
		Mid	-6.40	0.22		-6.22	24.00	30.22
		High	-6.39	0.22		-6.21	24.00	30.21
	6 685	Low	-6.91	0.22		-6.73	24.00	30.73
		Mid	-6.69	0.22		-6.51	24.00	30.51
		High	-6.94	0.22		-6.76	24.00	30.76
	6 845	Low	-6.83	0.22		-6.65	24.00	30.65
		Mid	-6.55	0.22		-6.37	24.00	30.37
		High	-6.78	0.22		-6.60	24.00	30.60
	6 885	Low	-6.22	0.22		-6.04	24.00	30.04
		Mid	-5.72	0.22		-5.54	24.00	29.54
		High	-6.08	0.22		-5.90	24.00	29.90
7 005	Low	-6.08	0.22	-5.90	24.00	29.90		
	Mid	-5.72	0.22	-5.54	24.00	29.54		
	High	-6.18	0.22	-6.00	24.00	30.00		
7 085	Low	-6.14	0.22	-5.96	24.00	29.96		
	Mid	-6.01	0.22	-5.83	24.00	29.83		
	High	-6.23	0.22	-6.05	24.00	30.05		
Measurement uncertainty			± 1.5 dB					



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2023-00952
 Page (101) / (427) Pages

Test Mode	Frequency (MHz)	RU Index	Measured Output Power (dBm)	Duty cycle Factor (dB)	Antenna Gain (dBi)	Result Output Power (dBm)	Limit (dBm)	Margin (dB)
802.11ax _HE40 _106T	5 965	Low	-3.24	0.23	-0.04	-3.05	24.00	27.05
		Mid	-3.21	0.23		-3.02	24.00	27.02
		High	-3.39	0.23		-3.20	24.00	27.20
	6 165	Low	-3.35	0.23		-3.16	24.00	27.16
		Mid	-3.28	0.23		-3.09	24.00	27.09
		High	-3.39	0.23		-3.20	24.00	27.20
	6 405	Low	-3.46	0.23		-3.27	24.00	27.27
		Mid	-3.51	0.23		-3.32	24.00	27.32
		High	-3.53	0.23		-3.34	24.00	27.34
	6 445	Low	-2.60	0.23		-2.41	24.00	26.41
		Mid	-2.73	0.23		-2.54	24.00	26.54
		High	-2.79	0.23		-2.60	24.00	26.60
	6 485	Low	-2.79	0.23		-2.60	24.00	26.60
		Mid	-2.76	0.23		-2.57	24.00	26.57
		High	-2.76	0.23		-2.57	24.00	26.57
	6 525	Low	-3.28	0.23		-3.09	24.00	27.09
		Mid	-3.50	0.23		-3.31	24.00	27.31
		High	-4.16	0.23		-3.97	24.00	27.97
	6 685	Low	-2.92	0.23		-2.73	24.00	26.73
		Mid	-4.64	0.23		-4.45	24.00	28.45
		High	-2.86	0.23		-2.67	24.00	26.67
	6 845	Low	-3.37	0.23		-3.18	24.00	27.18
		Mid	-3.11	0.23		-2.92	24.00	26.92
		High	-3.42	0.23		-3.23	24.00	27.23
	6 885	Low	-2.63	0.23		-2.44	24.00	26.44
		Mid	-2.50	0.23		-2.31	24.00	26.31
		High	-2.65	0.23		-2.46	24.00	26.46
	7 005	Low	-2.52	0.23		-2.33	24.00	26.33
		Mid	-2.31	0.23		-2.12	24.00	26.12
		High	-2.44	0.23		-2.25	24.00	26.25
7 085	Low	-2.28	0.23	-2.09	24.00	26.09		
	Mid	-2.17	0.23	-1.98	24.00	25.98		
	High	-2.44	0.23	-2.25	24.00	26.25		
Measurement uncertainty			± 1.5 dB					



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2023-00952
 Page (102) / (427) Pages

Test Mode	Frequency (MHz)	RU Index	Measured Output Power (dBm)	Duty cycle Factor (dB)	Antenna Gain (dBi)	Result Output Power (dBm)	Limit (dBm)	Margin (dB)
802.11ax _HE40 _242T	5 965	Low	0.20	0.26	-0.04	0.42	24.00	23.58
		Mid	-			-		
		High	0.35	0.26		0.57	24.00	23.43
	6 165	Low	0.14	0.26		0.36	24.00	23.64
		Mid	-			-		
		High	0.22	0.26		0.44	24.00	23.56
	6 405	Low	-0.39	0.26		-0.17	24.00	24.17
		Mid	-			-		
		High	-0.18	0.26		0.04	24.00	23.96
	6 445	Low	0.06	0.26		0.28	24.00	23.72
		Mid	-			-		
		High	0.12	0.26		0.34	24.00	23.66
	6 485	Low	0.03	0.26		0.25	24.00	23.75
		Mid	-			-		
		High	0.16	0.26		0.38	24.00	23.62
	6 525	Low	-0.02	0.26		0.20	24.00	23.80
		Mid	-			-		
		High	0.02	0.26		0.24	24.00	23.76
	6 685	Low	0.26	0.26		0.48	24.00	23.52
		Mid	-			-		
		High	0.32	0.26		0.54	24.00	23.46
	6 845	Low	0.13	0.26		0.35	24.00	23.65
		Mid	-			-		
		High	0.18	0.26		0.40	24.00	23.60
	6 885	Low	0.18	0.26		0.40	24.00	23.60
		Mid	-			-		
		High	0.32	0.26		0.54	24.00	23.46
	7 005	Low	0.49	0.26		0.71	24.00	23.29
		Mid	-			-		
		High	0.56	0.26		0.78	24.00	23.22
7 085	Low	0.82	0.26	1.04	24.00	22.96		
	Mid	-		-				
	High	0.61	0.26	0.83	24.00	23.17		
Measurement uncertainty		± 1.5 dB						



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2023-00952
 Page (103) / (427) Pages

Test Mode	Frequency (MHz)	Measured Output Power (dBm)	Duty cycle Factor (dB)	Antenna Gain (dBi)	Result Output Power (dBm)	Limit (dBm)	Margin (dB)
802.11ax _HE40 _484T	5 965	2.23	0.27	-0.04	2.46	24.00	21.54
	6 165	2.99	0.27		3.22	24.00	20.78
	6 405	1.16	0.27		1.39	24.00	22.61
	6 445	1.73	0.27		1.96	24.00	22.04
	6 485	1.74	0.27		1.97	24.00	22.03
	6 525	1.26	0.27		1.49	24.00	22.51
	6 685	3.09	0.27		3.32	24.00	20.68
	6 845	0.15	0.27		0.38	24.00	23.62
	6 885	0.41	0.27		0.64	24.00	23.36
	7 005	3.29	0.27		3.52	24.00	20.48
	7 085	1.99	0.27	2.22	24.00	21.78	
Measurement uncertainty		± 1.5 dB					



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2023-00952
 Page (104) / (427) Pages

Test Mode	Frequency (MHz)	RU Index	Measured Output Power (dBm)	Duty cycle Factor (dB)	Antenna Gain (dBi)	Result Output Power (dBm)	Limit (dBm)	Margin (dB)
802.11ax _HE80 _26T	5 985	Low	-5.75	0.21	-0.04	-5.58	24.00	29.58
		Mid	-5.70	0.21		-5.53	24.00	29.53
		High	-6.00	0.21		-5.83	24.00	29.83
	6 145	Low	-6.07	0.21		-5.90	24.00	29.90
		Mid	-5.82	0.21		-5.65	24.00	29.65
		High	-5.69	0.21		-5.52	24.00	29.52
	6 385	Low	-5.61	0.21		-5.44	24.00	29.44
		Mid	-5.52	0.21		-5.35	24.00	29.35
		High	-5.66	0.21		-5.49	24.00	29.49
	6 465	Low	-5.06	0.21		-4.89	24.00	28.89
		Mid	-5.22	0.21		-5.05	24.00	29.05
		High	-5.13	0.21		-4.96	24.00	28.96
	6 545	Low	-5.33	0.21		-5.16	24.00	29.16
		Mid	-5.22	0.21		-5.05	24.00	29.05
		High	-5.45	0.21		-5.28	24.00	29.28
	6 705	Low	-5.68	0.21		-5.51	24.00	29.51
		Mid	-6.07	0.21		-5.90	24.00	29.90
		High	-5.81	0.21		-5.64	24.00	29.64
	6 865	Low	-6.75	0.21		-6.58	24.00	30.58
		Mid	-6.46	0.21		-6.29	24.00	30.29
		High	-6.82	0.21		-6.65	24.00	30.65
	6 945	Low	-5.72	0.21		-5.55	24.00	29.55
		Mid	-5.92	0.21		-5.75	24.00	29.75
		High	-5.70	0.21		-5.53	24.00	29.53
	7 025	Low	-5.89	0.21		-5.72	24.00	29.72
		Mid	-5.92	0.21		-5.75	24.00	29.75
		High	-6.34	0.21		-6.17	24.00	30.17
Measurement uncertainty			± 1.5 dB					



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2023-00952
 Page (105) / (427) Pages

Test Mode	Frequency (MHz)	RU Index	Measured Output Power (dBm)	Duty cycle Factor (dB)	Antenna Gain (dBi)	Result Output Power (dBm)	Limit (dBm)	Margin (dB)
802.11ax _HE80 _52T	5 985	Low	-5.18	0.22	-0.04	-5.00	24.00	29.00
		Mid	-6.15	0.22		-5.97	24.00	29.97
		High	-5.94	0.22		-5.76	24.00	29.76
	6 145	Low	-6.31	0.22		-6.13	24.00	30.13
		Mid	-6.24	0.22		-6.06	24.00	30.06
		High	-6.37	0.22		-6.19	24.00	30.19
	6 385	Low	-6.09	0.22		-5.91	24.00	29.91
		Mid	-5.90	0.22		-5.72	24.00	29.72
		High	-5.92	0.22		-5.74	24.00	29.74
	6 465	Low	-5.61	0.22		-5.43	24.00	29.43
		Mid	-5.78	0.22		-5.60	24.00	29.60
		High	-5.78	0.22		-5.60	24.00	29.60
	6 545	Low	-6.19	0.22		-6.01	24.00	30.01
		Mid	-6.31	0.22		-6.13	24.00	30.13
		High	-6.20	0.22		-6.02	24.00	30.02
	6 705	Low	-6.93	0.22		-6.75	24.00	30.75
		Mid	-6.71	0.22		-6.53	24.00	30.53
		High	-6.61	0.22		-6.43	24.00	30.43
	6 865	Low	-6.67	0.22		-6.49	24.00	30.49
		Mid	-6.31	0.22		-6.13	24.00	30.13
		High	-6.30	0.22		-6.12	24.00	30.12
	6 945	Low	-5.08	0.22		-4.90	24.00	28.90
		Mid	-5.71	0.22		-5.53	24.00	29.53
		High	-5.83	0.22		-5.65	24.00	29.65
	7 025	Low	-5.77	0.22		-5.59	24.00	29.59
		Mid	-5.77	0.22		-5.59	24.00	29.59
		High	-5.92	0.22		-5.74	24.00	29.74
Measurement uncertainty			± 1.5 dB					



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2023-00952
 Page (106) / (427) Pages

Test Mode	Frequency (MHz)	RU Index	Measured Output Power (dBm)	Duty cycle Factor (dB)	Antenna Gain (dBi)	Result Output Power (dBm)	Limit (dBm)	Margin (dB)
802.11ax _HE80 _106T	5 985	Low	-3.39	0.23	-0.04	-3.20	24.00	27.20
		Mid	-3.01	0.23		-2.82	24.00	26.82
		High	-3.11	0.23		-2.92	24.00	26.92
	6 145	Low	-3.31	0.23		-3.12	24.00	27.12
		Mid	-4.46	0.23		-4.27	24.00	28.27
		High	-3.35	0.23		-3.16	24.00	27.16
	6 385	Low	-3.65	0.23		-3.46	24.00	27.46
		Mid	-4.06	0.23		-3.87	24.00	27.87
		High	-3.84	0.23		-3.65	24.00	27.65
	6 465	Low	-2.78	0.23		-2.59	24.00	26.59
		Mid	-3.04	0.23		-2.85	24.00	26.85
		High	-2.84	0.23		-2.65	24.00	26.65
	6 545	Low	-3.22	0.23		-3.03	24.00	27.03
		Mid	-3.22	0.23		-3.03	24.00	27.03
		High	-3.01	0.23		-2.82	24.00	26.82
	6 705	Low	-3.42	0.23		-3.23	24.00	27.23
		Mid	-3.24	0.23		-3.05	24.00	27.05
		High	-2.97	0.23		-2.78	24.00	26.78
	6 865	Low	-3.13	0.23		-2.94	24.00	26.94
		Mid	-3.34	0.23		-3.15	24.00	27.15
		High	-2.82	0.23		-2.63	24.00	26.63
	6 945	Low	-2.44	0.23		-2.25	24.00	26.25
		Mid	-2.51	0.23		-2.32	24.00	26.32
		High	-2.27	0.23		-2.08	24.00	26.08
	7 025	Low	-2.36	0.23		-2.17	24.00	26.17
		Mid	-2.41	0.23		-2.22	24.00	26.22
		High	-2.21	0.23		-2.02	24.00	26.02
Measurement uncertainty			± 1.5 dB					



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2023-00952
 Page (107) / (427) Pages

Test Mode	Frequency (MHz)	RU Index	Measured Output Power (dBm)	Duty cycle Factor (dB)	Antenna Gain (dBi)	Result Output Power (dBm)	Limit (dBm)	Margin (dB)
802.11ax _HE80 _242T	5 985	Low	0.24	0.27	-0.04	0.47	24.00	23.53
		Mid	0.36	0.27		0.59	24.00	23.41
		High	0.16	0.27		0.39	24.00	23.61
	6 145	Low	0.10	0.27		0.33	24.00	23.67
		Mid	0.04	0.27		0.27	24.00	23.73
		High	-0.05	0.27		0.18	24.00	23.82
	6 385	Low	-0.17	0.27		0.06	24.00	23.94
		Mid	-0.39	0.27		-0.16	24.00	24.16
		High	-0.27	0.27		-0.04	24.00	24.04
	6 465	Low	0.22	0.27		0.45	24.00	23.55
		Mid	0.08	0.27		0.31	24.00	23.69
		High	-0.06	0.27		0.17	24.00	23.83
	6 545	Low	0.36	0.27		0.59	24.00	23.41
		Mid	-0.67	0.27		-0.44	24.00	24.44
		High	0.35	0.27		0.58	24.00	23.42
	6 705	Low	0.28	0.27		0.51	24.00	23.49
		Mid	0.43	0.27		0.66	24.00	23.34
		High	0.38	0.27		0.61	24.00	23.39
	6 865	Low	0.28	0.27		0.51	24.00	23.49
		Mid	0.59	0.27		0.82	24.00	23.18
		High	0.47	0.27		0.70	24.00	23.30
	6 945	Low	0.53	0.27		0.76	24.00	23.24
		Mid	0.56	0.27		0.79	24.00	23.21
		High	0.43	0.27		0.66	24.00	23.34
	7 025	Low	0.70	0.27		0.93	24.00	23.07
		Mid	0.68	0.27		0.91	24.00	23.09
		High	0.65	0.27		0.88	24.00	23.12
Measurement uncertainty			± 1.5 dB					



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2023-00952
 Page (108) / (427) Pages

Test Mode	Frequency (MHz)	RU Index	Measured Output Power (dBm)	Duty cycle Factor (dB)	Antenna Gain (dBi)	Result Output Power (dBm)	Limit (dBm)	Margin (dB)
802.11ax _HE80 _484T	5 985	Low	2.79	0.28	-0.04	3.03	24.00	20.97
		Mid	-			-		
		High	3.02	0.28		3.26	24.00	20.74
	6 145	Low	2.85	0.28		3.09	24.00	20.91
		Mid	-			-		
		High	2.78	0.28		3.02	24.00	20.98
	6 385	Low	2.41	0.28		2.65	24.00	21.35
		Mid	-			-		
		High	2.43	0.28		2.67	24.00	21.33
	6 465	Low	3.20	0.28		3.44	24.00	20.56
		Mid	-			-		
		High	3.14	0.28		3.38	24.00	20.62
	6 545	Low	3.00	0.28		3.24	24.00	20.76
		Mid	-			-		
		High	2.83	0.28		3.07	24.00	20.93
	6 705	Low	3.06	0.28		3.30	24.00	20.70
		Mid	-			-		
		High	3.17	0.28		3.41	24.00	20.59
	6 865	Low	3.50	0.28		3.74	24.00	20.26
		Mid	-			-		
		High	3.50	0.28		3.74	24.00	20.26
	6 945	Low	3.12	0.28		3.36	24.00	20.64
		Mid	-			-		
		High	3.16	0.28		3.40	24.00	20.60
7 025	Low	3.42	0.28	3.66	24.00	20.34		
	Mid	-		-				
	High	3.42	0.28	3.66	24.00	20.34		
Measurement uncertainty			± 1.5 dB					



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2023-00952
 Page (109) / (427) Pages

Test Mode	Frequency (MHz)	Measured Output Power (dBm)	Duty cycle Factor (dB)	Antenna Gain (dBi)	Result Output Power (dBm)	Limit (dBm)	Margin (dB)
802.11ax _HE80 _996T	5 985	5.76	0.29	-0.04	6.01	24.00	17.99
	6 145	6.18	0.29		6.43	24.00	17.57
	6 385	4.53	0.29		4.78	24.00	19.22
	6 465	5.55	0.29		5.80	24.00	18.20
	6 545	4.91	0.29		5.16	24.00	18.84
	6 705	6.57	0.29		6.82	24.00	17.18
	6 865	7.57	0.29		7.82	24.00	16.18
	6 945	8.09	0.29		8.34	24.00	15.66
	7 025	5.91	0.29		6.16	24.00	17.84
Measurement uncertainty		± 1.5 dB					



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2023-00952
 Page (110) / (427) Pages

ANT0 + ANT1(MIMO)

Test Mode	Frequency (MHz)	RU Index	Output Power (dBm)			Duty cycle Factor (dB)	Antenna Gain (dBi)	Result Output Power (dBm)	Limit (dBm)	Margin (dB)
			ANT0	ANT1	ANT0+ANT1					
802.11 ax _HE20 _26T	5 955	Low	-7.33	-4.84	-2.90	0.21	3.65	0.96	24.00	23.04
		Mid	-7.65	-4.92	-3.06	0.21		0.80	24.00	23.20
		High	-5.75	-4.72	-2.19	0.21		1.67	24.00	22.33
	6 175	Low	-7.44	-4.51	-2.72	0.21		1.14	24.00	22.86
		Mid	-8.06	-4.32	-2.79	0.21		1.07	24.00	22.93
		High	-7.42	-4.23	-2.53	0.21		1.33	24.00	22.67
	6 415	Low	-7.32	-5.47	-3.29	0.21		0.57	24.00	23.43
		Mid	-6.85	-5.69	-3.22	0.21		0.64	24.00	23.36
		High	-6.89	-5.48	-3.12	0.21		0.74	24.00	23.26
	6 435	Low	-6.53	-5.34	-2.88	0.21		0.98	24.00	23.02
		Mid	-6.84	-5.10	-2.87	0.21		0.99	24.00	23.01
		High	-6.22	-4.95	-2.53	0.21		1.33	24.00	22.67
	6 475	Low	-6.56	-4.94	-2.66	0.21		1.20	24.00	22.80
		Mid	-6.56	-5.28	-2.86	0.21		1.00	24.00	23.00
		High	-6.52	-4.92	-2.64	0.21		1.22	24.00	22.78
	6 515	Low	-6.23	-5.48	-2.83	0.21		1.03	24.00	22.97
		Mid	-6.64	-5.43	-2.98	0.21		0.88	24.00	23.12
		High	-6.47	-5.72	-3.07	0.21		0.79	24.00	23.21
	6 535	Low	-6.57	-6.10	-3.32	0.21		0.54	24.00	23.46
		Mid	-6.34	-6.06	-3.19	0.21		0.67	24.00	23.33
		High	-6.62	-4.30	-2.30	0.21		1.56	24.00	22.44
	6 695	Low	-7.13	-4.40	-2.54	0.21		1.32	24.00	22.68
		Mid	-7.23	-4.65	-2.74	0.21		1.12	24.00	22.88
		High	-6.88	-4.64	-2.61	0.21		1.25	24.00	22.75
	6 855	Low	-6.98	-4.19	-2.35	0.21		1.51	24.00	22.49
		Mid	-6.67	-4.50	-2.44	0.21		1.42	24.00	22.58
		High	-6.97	-4.51	-2.56	0.21		1.30	24.00	22.70
	6 875	Low	-6.95	-4.26	-2.39	0.21		1.47	24.00	22.53
		Mid	-7.25	-4.54	-2.68	0.21		1.18	24.00	22.82
		High	-7.03	-4.56	-2.61	0.21		1.25	24.00	22.75
6 995	Low	-6.42	-4.56	-2.38	0.21	1.48	24.00	22.52		
	Mid	-6.71	-4.82	-2.65	0.21	1.21	24.00	22.79		
	High	-6.85	-4.58	-2.56	0.21	1.30	24.00	22.70		
7 095	Low	-7.34	-5.98	-3.60	0.21	0.26	24.00	23.74		
	Mid	-7.25	-6.29	-3.73	0.21	0.13	24.00	23.87		



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2023-00952
 Page (111) / (427) Pages

7 115	High	-7.01	-6.17	-3.56	0.21	0.30	24.00	23.70	
	Low	-9.23	-8.06	-5.60	0.21		-1.74	24.00	25.74
	Mid	-9.22	-8.42	-5.79	0.21		-1.93	24.00	25.93
	High	-9.13	-8.08	-5.56	0.21		-1.70	24.00	25.70
Measurement uncertainty		± 1.5 dB							

Test Mode	Frequency (MHz)	RU Index	Output Power (dBm)			Duty cycle Factor (dB)	Antenna Gain (dBi)	Result Output Power (dBm)	Limit (dBm)	Margin (dB)
			ANT0	ANT1	ANT0+ANT1					
802.11 ax _HE20 _52T	5 955	Low	-5.14	-5.76	-2.43	0.22	3.65	1.44	24.00	22.56
		Mid	-4.97	-5.63	-2.28	0.22		1.59	24.00	22.41
		High	-4.93	-5.54	-2.21	0.22		1.66	24.00	22.34
	6 175	Low	-6.70	-4.21	-2.27	0.22		1.60	24.00	22.40
		Mid	-6.72	-4.88	-2.69	0.22		1.18	24.00	22.82
		High	-6.73	-4.94	-2.73	0.22		1.14	24.00	22.86
	6 415	Low	-6.08	-6.05	-3.05	0.22		0.82	24.00	23.18
		Mid	-5.80	-5.82	-2.80	0.22		1.07	24.00	22.93
		High	-5.84	-5.95	-2.88	0.22		0.99	24.00	23.01
	6 435	Low	-5.50	-5.52	-2.50	0.22		1.37	24.00	22.63
		Mid	-5.30	-5.47	-2.37	0.22		1.50	24.00	22.50
		High	-5.30	-5.45	-2.36	0.22		1.51	24.00	22.49
	6 475	Low	-6.37	-5.71	-3.02	0.22		0.85	24.00	23.15
		Mid	-5.09	-5.68	-2.36	0.22		1.51	24.00	22.49
		High	-5.17	-5.71	-2.42	0.22		1.45	24.00	22.55
	6 515	Low	-5.29	-6.41	-2.80	0.22		1.07	24.00	22.93
		Mid	-5.13	-6.28	-2.66	0.22		1.21	24.00	22.79
		High	-5.05	-6.19	-2.57	0.22		1.30	24.00	22.70
	6 535	Low	-5.35	-6.73	-2.98	0.22		0.89	24.00	23.11
		Mid	-5.22	-6.75	-2.91	0.22		0.96	24.00	23.04
		High	-4.97	-6.57	-2.69	0.22		1.18	24.00	22.82
	6 695	Low	-6.27	-5.92	-3.08	0.22		0.79	24.00	23.21
		Mid	-6.21	-5.77	-2.97	0.22		0.90	24.00	23.10
		High	-6.29	-5.75	-3.00	0.22		0.87	24.00	23.13
	6 855	Low	-5.70	-4.35	-1.96	0.22		1.91	24.00	22.09
		Mid	-5.49	-4.21	-1.79	0.22		2.08	24.00	21.92
		High	-5.50	-4.41	-1.91	0.22		1.96	24.00	22.04
	6 875	Low	-6.13	-4.81	-2.41	0.22		1.46	24.00	22.54
		Mid	-6.02	-4.66	-2.28	0.22		1.59	24.00	22.41
		High	-6.07	-4.74	-2.34	0.22		1.53	24.00	22.47
6 995	Low	-4.76	-4.89	-1.81	0.22	2.06	24.00	21.94		



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2023-00952
 Page (112) / (427) Pages

	7 095	Mid	-4.87	-4.55	-1.70	0.22	3.65	2.17	24.00	21.83
		High	-4.74	-4.98	-1.85	0.22		2.02	24.00	21.98
		Low	-5.61	-6.66	-3.09	0.22		0.78	24.00	23.22
	7 115	Mid	-5.74	-6.65	-3.16	0.22		0.71	24.00	23.29
		High	-5.84	-6.59	-3.19	0.22		0.68	24.00	23.32
		Low	-5.75	-6.80	-3.23	0.22		0.64	24.00	23.36
		Mid	-5.86	-6.56	-3.19	0.22		0.68	24.00	23.32
		High	-5.80	-6.60	-3.17	0.22		0.70	24.00	23.30
		Low	-5.75	-6.80	-3.23	0.22		0.64	24.00	23.36
Measurement uncertainty		± 1.5 dB								

Test Mode	Frequency (MHz)	RU Index	Output Power (dBm)			Duty cycle Factor (dB)	Antenna Gain (dBi)	Result Output Power (dBm)	Limit (dBm)	Margin (dB)
			ANT0	ANT1	ANT0+ANT1					
802.11 ax HE20_106T	5 955	Low	-3.29	-2.79	-0.02	0.23	3.65	3.86	24.00	20.14
		Mid	-					-		
		High	-3.11	-2.44	0.25	0.23		4.13	24.00	19.87
	6 175	Low	-5.31	-2.26	-0.51	0.23		3.37	24.00	20.63
		Mid	-					-		
		High	-4.94	-1.89	-0.14	0.23		3.74	24.00	20.26
	6 415	Low	-4.03	-3.82	-0.91	0.23		2.97	24.00	21.03
		Mid	-					-		
		High	-4.07	-3.76	-0.90	0.23		2.98	24.00	21.02
	6 435	Low	-2.94	-2.72	0.18	0.23		4.06	24.00	19.94
		Mid	-					-		
		High	-2.85	-2.75	0.21	0.23		4.09	24.00	19.91
	6 475	Low	-2.98	-2.80	0.12	0.23		4.00	24.00	20.00
		Mid	-					-		
		High	-2.39	-2.83	0.41	0.23		4.29	24.00	19.71
	6 515	Low	-2.74	-3.36	-0.03	0.23		3.85	24.00	20.15
		Mid	-					-		
		High	-2.50	-3.57	0.01	0.23		3.89	24.00	20.11
	6 535	Low	-2.78	-3.74	-0.22	0.23		3.66	24.00	20.34
		Mid	-					-		
		High	-2.68	-3.24	0.06	0.23		3.94	24.00	20.06
	6 695	Low	-4.00	-2.26	-0.03	0.23		3.85	24.00	20.15
		Mid	-					-		
		High	-3.84	-2.20	0.07	0.23		3.95	24.00	20.05
6 855	Low	-3.05	-1.13	1.03	0.23	4.91	24.00	19.09		
	Mid	-				-				
	High	-3.06	-1.19	0.99	0.23	4.87	24.00	19.13		



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2023-00952
 Page (113) / (427) Pages

Test Mode	Frequency (MHz)	Output Power (dBm)				Duty cycle Factor (dB)	Antenna Gain (dBi)	Result Output Power (dBm)	Limit (dBm)	Margin (dB)
		ANT0	ANT1	ANT0+ANT1						
802.11 ax _HE20 _242T	5 955	-0.39	0.21	2.93	0.27	3.65	6.85	24.00	17.15	
	6 175	-1.07	0.90	3.04	0.27		6.96	24.00	17.04	
	6 415	-1.03	-0.93	2.03	0.27		5.95	24.00	18.05	
	6 435	0.04	0.03	3.05	0.27		6.97	24.00	17.03	
	6 475	0.12	-0.27	2.94	0.27		6.86	24.00	17.14	
	6 515	0.13	-0.71	2.74	0.27		6.66	24.00	17.34	
	6 535	0.09	-0.90	2.63	0.27		6.55	24.00	17.45	
	6 695	-1.23	0.46	2.71	0.27		6.63	24.00	17.37	
	6 855	-0.45	1.64	3.73	0.27		7.65	24.00	16.35	
	6 875	-1.00	1.23	3.27	0.27		7.19	24.00	16.81	
	6 995	-0.17	1.41	3.70	0.27		7.62	24.00	16.38	
	7 095	-0.75	0.10	2.71	0.27		6.63	24.00	17.37	
7 115	-0.76	0.21	2.76	0.27	6.68	24.00	17.32			
Measurement uncertainty		± 1.5 dB								

Test Mode	Frequency (MHz)	Output Power (dBm)				Duty cycle Factor (dB)	Antenna Gain (dBi)	Result Output Power (dBm)	Limit (dBm)	Margin (dB)
		ANT0	ANT1	ANT0+ANT1						
802.11 ax _HE20 _242T	6 875	-3.18	-1.04	1.03	0.23	3.65	4.91	24.00	19.09	
	6 875	-					-			
	6 875	-3.24	-0.98	1.05	0.23		4.93	24.00	19.07	
	6 995	-2.16	-0.84	1.56	0.23		5.44	24.00	18.56	
	6 995	-					-			
	6 995	-2.19	-0.95	1.48	0.23		5.36	24.00	18.64	
	7 095	-3.56	-2.25	0.15	0.23		4.03	24.00	19.97	
	7 095	-					-			
	7 095	-3.24	-2.43	0.19	0.23		4.07	24.00	19.93	
	7 115	-3.18	-2.43	0.22	0.23		4.10	24.00	19.90	
	7 115	-					-			
	7 115	-3.26	-2.42	0.19	0.23		4.07	24.00	19.93	
Measurement uncertainty		± 1.5 dB								



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2023-00952
 Page (114) / (427) Pages

Test Mode	Frequency (MHz)	RU Index	Output Power (dBm)			Duty cycle Factor (dB)	Antenna Gain (dBi)	Result Output Power (dBm)	Limit (dBm)	Margin (dB)
			ANT0	ANT1	ANT0+ANT1					
802.11 ax _HE40 _26T	5 965	Low	-7.67	-6.10	-3.80	0.21	3.65	0.06	24.00	23.94
		Mid	-8.20	-5.92	-3.90	0.21		-0.04	24.00	24.04
		High	-5.27	-5.83	-2.53	0.21		1.33	24.00	22.67
	6 165	Low	-5.30	-6.10	-2.67	0.21		1.19	24.00	22.81
		Mid	-5.88	-6.15	-3.00	0.21		0.86	24.00	23.14
		High	-5.29	-6.38	-2.79	0.21		1.07	24.00	22.93
	6 405	Low	-6.25	-5.78	-3.00	0.21		0.86	24.00	23.14
		Mid	-6.25	-5.46	-2.83	0.21		1.03	24.00	22.97
		High	-6.23	-5.80	-3.00	0.21		0.86	24.00	23.14
	6 445	Low	-5.58	-5.25	-2.40	0.21		1.46	24.00	22.54
		Mid	-5.56	-4.67	-2.08	0.21		1.78	24.00	22.22
		High	-5.62	-5.24	-2.42	0.21		1.44	24.00	22.56
	6 485	Low	-5.44	-5.24	-2.33	0.21		1.53	24.00	22.47
		Mid	-5.46	-4.93	-2.18	0.21		1.68	24.00	22.32
		High	-5.48	-5.24	-2.35	0.21		1.51	24.00	22.49
	6 525	Low	-6.36	-5.79	-3.06	0.21		0.80	24.00	23.20
		Mid	-5.92	-5.83	-2.86	0.21		1.00	24.00	23.00
		High	-6.06	-5.76	-2.90	0.21		0.96	24.00	23.04
	6 685	Low	-4.71	-5.79	-2.21	0.21		1.65	24.00	22.35
		Mid	-5.93	-5.95	-2.93	0.21		0.93	24.00	23.07
		High	-5.16	-6.22	-2.65	0.21		1.21	24.00	22.79
	6 845	Low	-6.27	-6.68	-3.46	0.21		0.40	24.00	23.60
		Mid	-6.17	-6.43	-3.29	0.21		0.57	24.00	23.43
		High	-6.06	-6.83	-3.42	0.21		0.44	24.00	23.56
	6 885	Low	-5.17	-5.80	-2.46	0.21		1.40	24.00	22.60
		Mid	-5.05	-5.38	-2.20	0.21		1.66	24.00	22.34
		High	-5.30	-5.70	-2.49	0.21		1.37	24.00	22.63
	7 005	Low	-5.20	-5.83	-2.49	0.21		1.37	24.00	22.63
		Mid	-4.98	-5.68	-2.31	0.21		1.55	24.00	22.45
		High	-4.86	-5.91	-2.34	0.21		1.52	24.00	22.48
7 085	Low	-5.21	-6.07	-2.61	0.21	1.25	24.00	22.75		
	Mid	-4.79	-5.57	-2.15	0.21	1.71	24.00	22.29		
	High	-5.00	-6.09	-2.50	0.21	1.36	24.00	22.64		
Measurement uncertainty			± 1.5 dB							



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2023-00952
 Page (115) / (427) Pages

Test Mode	Frequency (MHz)	RU Index	Output Power (dBm)			Duty cycle Factor (dB)	Antenna Gain (dBi)	Result Output Power (dBm)	Limit (dBm)	Margin (dB)
			ANT0	ANT1	ANT0+ANT1					
802.11 ax _HE40 _52T	5 965	Low	-4.67	-6.48	-2.47	0.22	3.65	1.40	24.00	22.60
		Mid	-4.36	-5.92	-2.06	0.22		1.81	24.00	22.19
		High	-4.50	-6.21	-2.26	0.22		1.61	24.00	22.39
	6 165	Low	-4.82	-6.45	-2.55	0.22		1.32	24.00	22.68
		Mid	-4.56	-6.02	-2.22	0.22		1.65	24.00	22.35
		High	-4.89	-6.15	-2.46	0.22		1.41	24.00	22.59
	6 405	Low	-5.17	-6.09	-2.60	0.22		1.27	24.00	22.73
		Mid	-4.85	-5.84	-2.31	0.22		1.56	24.00	22.44
		High	-5.08	-5.94	-2.48	0.22		1.39	24.00	22.61
	6 445	Low	-4.73	-4.80	-1.75	0.22		2.12	24.00	21.88
		Mid	-4.21	-5.58	-1.83	0.22		2.04	24.00	21.96
		High	-4.45	-5.76	-2.05	0.22		1.82	24.00	22.18
	6 485	Low	-4.37	-5.90	-2.06	0.22		1.81	24.00	22.19
		Mid	-4.28	-5.51	-1.84	0.22		2.03	24.00	21.97
		High	-4.39	-5.90	-2.07	0.22		1.80	24.00	22.20
	6 525	Low	-4.83	-6.46	-2.56	0.22		1.31	24.00	22.69
		Mid	-4.76	-6.40	-2.49	0.22		1.38	24.00	22.62
		High	-4.68	-6.39	-2.44	0.22		1.43	24.00	22.57
	6 685	Low	-4.20	-6.91	-2.34	0.22		1.53	24.00	22.47
		Mid	-4.28	-6.69	-2.31	0.22		1.56	24.00	22.44
		High	-4.56	-6.94	-2.58	0.22		1.29	24.00	22.71
	6 845	Low	-4.94	-6.83	-2.77	0.22		1.10	24.00	22.90
		Mid	-4.66	-6.55	-2.49	0.22		1.38	24.00	22.62
		High	-5.04	-6.78	-2.81	0.22		1.06	24.00	22.94
	6 885	Low	-4.19	-6.22	-2.08	0.22		1.79	24.00	22.21
		Mid	-3.94	-5.72	-1.73	0.22		2.14	24.00	21.86
		High	-4.17	-6.08	-2.01	0.22		1.86	24.00	22.14
	7 005	Low	-4.18	-6.08	-2.02	0.22		1.85	24.00	22.15
		Mid	-3.77	-5.72	-1.63	0.22		2.24	24.00	21.76
		High	-4.06	-6.18	-1.98	0.22		1.89	24.00	22.11
7 085	Low	-4.14	-6.14	-2.02	0.22	1.85	24.00	22.15		
	Mid	-3.74	-6.01	-1.72	0.22	2.15	24.00	21.85		
	High	-3.98	-6.23	-1.95	0.22	1.92	24.00	22.08		
Measurement uncertainty			± 1.5 dB							



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2023-00952
 Page (116) / (427) Pages

Test Mode	Frequency (MHz)	RU Index	Output Power (dBm)			Duty cycle Factor (dB)	Antenna Gain (dBi)	Result Output Power (dBm)	Limit (dBm)	Margin (dB)
			ANT0	ANT1	ANT0+ANT1					
802.11 ax _HE40 _106T	5 965	Low	-2.78	-3.24	0.01	0.23	3.65	3.89	24.00	20.11
		Mid	-2.85	-3.21	-0.02	0.23		3.86	24.00	20.14
		High	-2.63	-3.39	0.02	0.23		3.90	24.00	20.10
	6 165	Low	-3.18	-3.35	-0.25	0.23		3.63	24.00	20.37
		Mid	-3.15	-3.28	-0.20	0.23		3.68	24.00	20.32
		High	-3.21	-3.39	-0.29	0.23		3.59	24.00	20.41
	6 405	Low	-3.37	-3.46	-0.40	0.23		3.48	24.00	20.52
		Mid	-3.05	-3.51	-0.26	0.23		3.62	24.00	20.38
		High	-2.94	-3.53	-0.21	0.23		3.67	24.00	20.33
	6 445	Low	-2.16	-2.60	0.64	0.23		4.52	24.00	19.48
		Mid	-1.89	-2.73	0.72	0.23		4.60	24.00	19.40
		High	-1.83	-2.79	0.73	0.23		4.61	24.00	19.39
	6 485	Low	-1.94	-2.79	0.67	0.23		4.55	24.00	19.45
		Mid	-1.85	-2.76	0.73	0.23		4.61	24.00	19.39
		High	-1.79	-2.76	0.76	0.23		4.64	24.00	19.36
	6 525	Low	-2.37	-3.28	0.21	0.23		4.09	24.00	19.91
		Mid	-2.20	-3.50	0.21	0.23		4.09	24.00	19.91
		High	-2.10	-4.16	0.00	0.23		3.88	24.00	20.12
	6 685	Low	-2.19	-2.92	0.47	0.23		4.35	24.00	19.65
		Mid	-1.96	-4.64	-0.09	0.23		3.79	24.00	20.21
		High	-1.94	-2.86	0.63	0.23		4.51	24.00	19.49
	6 845	Low	-2.60	-3.37	0.04	0.23		3.92	24.00	20.08
		Mid	-2.49	-3.11	0.22	0.23		4.10	24.00	19.90
		High	-2.47	-3.42	0.09	0.23		3.97	24.00	20.03
	6 885	Low	-2.19	-2.63	0.61	0.23		4.49	24.00	19.51
		Mid	-2.07	-2.50	0.73	0.23		4.61	24.00	19.39
		High	-2.01	-2.65	0.69	0.23		4.57	24.00	19.43
	7 005	Low	-1.96	-2.52	0.78	0.23		4.66	24.00	19.34
		Mid	-1.71	-2.31	1.01	0.23		4.89	24.00	19.11
		High	-2.28	-2.44	0.65	0.23		4.53	24.00	19.47
7 085	Low	-2.03	-2.28	0.86	0.23	4.74	24.00	19.26		
	Mid	-1.60	-2.17	1.13	0.23	5.01	24.00	18.99		
	High	-1.79	-2.44	0.91	0.23	4.79	24.00	19.21		
Measurement uncertainty			± 1.5 dB							



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2023-00952
 Page (117) / (427) Pages

Test Mode	Frequency (MHz)	RU Index	Output Power (dBm)			Duty cycle Factor (dB)	Antenna Gain (dBi)	Result Output Power (dBm)	Limit (dBm)	Margin (dB)
			ANT0	ANT1	ANT0+ANT1					
802.11 ax _HE40 _242T	5 965	Low	0.68	0.20	3.46	0.26	3.65	7.37	24.00	16.63
		Mid	-					-		
		High	0.86	0.35	3.62	0.26		7.53	24.00	16.47
	6 165	Low	0.44	0.14	3.30	0.26		7.21	24.00	16.79
		Mid	-					-		
		High	0.45	0.22	3.35	0.26		7.26	24.00	16.74
	6 405	Low	0.50	-0.39	3.09	0.26		7.00	24.00	17.00
		Mid	-					-		
		High	0.58	-0.18	3.23	0.26		7.14	24.00	16.86
	6 445	Low	0.98	0.06	3.55	0.26		7.46	24.00	16.54
		Mid	-					-		
		High	1.07	0.12	3.63	0.26		7.54	24.00	16.46
	6 485	Low	1.09	0.03	3.60	0.26		7.51	24.00	16.49
		Mid	-					-		
		High	1.08	0.16	3.65	0.26		7.56	24.00	16.44
	6 525	Low	1.24	-0.02	3.67	0.26		7.58	24.00	16.42
		Mid	-					-		
		High	1.08	0.02	3.59	0.26		7.50	24.00	16.50
	6 685	Low	1.38	0.26	3.87	0.26		7.78	24.00	16.22
		Mid	-					-		
		High	1.25	0.32	3.82	0.26		7.73	24.00	16.27
	6 845	Low	0.88	0.13	3.53	0.26		7.44	24.00	16.56
		Mid	-					-		
		High	1.04	0.18	3.64	0.26		7.55	24.00	16.45
6 885	Low	0.86	0.18	3.54	0.26	7.45	24.00	16.55		
	Mid	-				-				
	High	0.87	0.32	3.61	0.26	7.52	24.00	16.48		
7 005	Low	1.14	0.49	3.84	0.26	7.75	24.00	16.25		
	Mid	-				-				
	High	1.00	0.56	3.80	0.26	7.71	24.00	16.29		
7 085	Low	1.23	0.82	4.04	0.26	7.95	24.00	16.05		
	Mid	-				-				
	High	1.13	0.61	3.89	0.26	7.80	24.00	16.20		
Measurement uncertainty		± 1.5 dB								



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2023-00952
 Page (118) / (427) Pages

Test Mode	Frequency (MHz)	Output Power (dBm)			Duty cycle Factor (dB)	Antenna Gain (dBi)	Result Output Power (dBm)	Limit (dBm)	Margin (dB)
		ANT0	ANT1	ANT0+ANT1					
802.11 ax _HE40 _484T	5 965	1.52	2.23	4.90	0.27	3.65	8.82	24.00	15.18
	6 165	-0.40	2.99	4.63	0.27		8.55	24.00	15.45
	6 405	0.68	1.16	3.94	0.27		7.86	24.00	16.14
	6 445	1.66	1.73	4.71	0.27		8.63	24.00	15.37
	6 485	1.81	1.74	4.79	0.27		8.71	24.00	15.29
	6 525	2.11	1.26	4.72	0.27		8.64	24.00	15.36
	6 685	1.06	3.09	5.20	0.27		9.12	24.00	14.88
	6 845	1.15	0.15	3.69	0.27		7.61	24.00	16.39
	6 885	1.30	0.41	3.89	0.27		7.81	24.00	16.19
	7 005	1.89	3.29	5.66	0.27		9.58	24.00	14.42
7 085	0.52	1.99	4.33	0.27	8.25	24.00	15.75		
Measurement uncertainty		± 1.5 dB							



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2023-00952
 Page (119) / (427) Pages

Test Mode	Frequency (MHz)	RU Index	Output Power (dBm)			Duty cycle Factor (dB)	Antenna Gain (dBi)	Result Output Power (dBm)	Limit (dBm)	Margin (dB)
			ANT0	ANT1	ANT0+ANT1					
802.11 ax _HE80 _26T	5 985	Low	-5.36	-5.75	-2.54	0.21	3.65	1.32	24.00	22.68
		Mid	-5.54	-5.70	-2.61	0.21		1.25	24.00	22.75
		High	-5.14	-6.00	-2.54	0.21		1.32	24.00	22.68
	6 145	Low	-5.59	-6.07	-2.81	0.21		1.05	24.00	22.95
		Mid	-5.69	-5.82	-2.74	0.21		1.12	24.00	22.88
		High	-5.59	-5.69	-2.63	0.21		1.23	24.00	22.77
	6 385	Low	-6.19	-5.61	-2.88	0.21		0.98	24.00	23.02
		Mid	-6.20	-5.52	-2.84	0.21		1.02	24.00	22.98
		High	-6.17	-5.66	-2.90	0.21		0.96	24.00	23.04
	6 465	Low	-5.24	-5.06	-2.14	0.21		1.72	24.00	22.28
		Mid	-5.33	-5.22	-2.26	0.21		1.60	24.00	22.40
		High	-5.29	-5.13	-2.20	0.21		1.66	24.00	22.34
	6 545	Low	-5.56	-5.33	-2.43	0.21		1.43	24.00	22.57
		Mid	-5.53	-5.22	-2.36	0.21		1.50	24.00	22.50
		High	-5.22	-5.45	-2.32	0.21		1.54	24.00	22.46
	6 705	Low	-4.75	-5.68	-2.18	0.21		1.68	24.00	22.32
		Mid	-5.19	-6.07	-2.60	0.21		1.26	24.00	22.74
		High	-5.03	-5.81	-2.39	0.21		1.47	24.00	22.53
	6 865	Low	-6.01	-6.75	-3.35	0.21		0.51	24.00	23.49
		Mid	-6.21	-6.46	-3.32	0.21		0.54	24.00	23.46
		High	-6.50	-6.82	-3.65	0.21		0.21	24.00	23.79
	6 945	Low	-5.26	-5.72	-2.47	0.21		1.39	24.00	22.61
		Mid	-5.30	-5.92	-2.59	0.21		1.27	24.00	22.73
		High	-5.26	-5.70	-2.46	0.21		1.40	24.00	22.60
7 025	Low	-5.13	-5.89	-2.48	0.21	1.38	24.00	22.62		
	Mid	-4.92	-5.92	-2.38	0.21	1.48	24.00	22.52		
	High	-5.16	-6.34	-2.70	0.21	1.16	24.00	22.84		
Measurement uncertainty			± 1.5 dB							



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2023-00952
 Page (120) / (427) Pages

Test Mode	Frequency (MHz)	RU Index	Output Power (dBm)			Duty cycle Factor (dB)	Antenna Gain (dBi)	Result Output Power (dBm)	Limit (dBm)	Margin (dB)
			ANT0	ANT1	ANT0+ANT1					
802.11 ax _HE80 _52T	5 985	Low	-4.63	-5.18	-1.89	0.22	3.65	1.98	24.00	22.02
		Mid	-4.42	-6.15	-2.19	0.22		1.68	24.00	22.32
		High	-4.37	-5.94	-2.07	0.22		1.80	24.00	22.20
	6 145	Low	-4.63	-6.31	-2.38	0.22		1.49	24.00	22.51
		Mid	-4.73	-6.24	-2.41	0.22		1.46	24.00	22.54
		High	-4.59	-6.37	-2.38	0.22		1.49	24.00	22.51
	6 385	Low	-5.05	-6.09	-2.53	0.22		1.34	24.00	22.66
		Mid	-5.01	-5.90	-2.42	0.22		1.45	24.00	22.55
		High	-4.87	-5.92	-2.35	0.22		1.52	24.00	22.48
	6 465	Low	-4.28	-5.61	-1.88	0.22		1.99	24.00	22.01
		Mid	-4.28	-5.78	-1.96	0.22		1.91	24.00	22.09
		High	-4.10	-5.78	-1.85	0.22		2.02	24.00	21.98
	6 545	Low	-4.51	-6.19	-2.26	0.22		1.61	24.00	22.39
		Mid	-4.20	-6.31	-2.12	0.22		1.75	24.00	22.25
		High	-4.20	-6.20	-2.08	0.22		1.79	24.00	22.21
	6 705	Low	-4.19	-6.93	-2.34	0.22		1.53	24.00	22.47
		Mid	-4.49	-6.71	-2.45	0.22		1.42	24.00	22.58
		High	-4.50	-6.61	-2.42	0.22		1.45	24.00	22.55
	6 865	Low	-4.78	-6.67	-2.61	0.22		1.26	24.00	22.74
		Mid	-4.89	-6.31	-2.53	0.22		1.34	24.00	22.66
		High	-4.74	-6.30	-2.44	0.22		1.43	24.00	22.57
	6 945	Low	-4.12	-5.08	-1.56	0.22		2.31	24.00	21.69
		Mid	-3.93	-5.71	-1.72	0.22		2.15	24.00	21.85
		High	-3.69	-5.83	-1.62	0.22		2.25	24.00	21.75
7 025	Low	-3.83	-5.77	-1.68	0.22	2.19	24.00	21.81		
	Mid	-3.66	-5.77	-1.58	0.22	2.29	24.00	21.71		
	High	-3.86	-5.92	-1.76	0.22	2.11	24.00	21.89		
Measurement uncertainty			± 1.5 dB							



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2023-00952
 Page (121) / (427) Pages

Test Mode	Frequency (MHz)	RU Index	Output Power (dBm)			Duty cycle Factor (dB)	Antenna Gain (dBi)	Result Output Power (dBm)	Limit (dBm)	Margin (dB)
			ANT0	ANT1	ANT0+ANT1					
802.11 ax HE80_106T	5 985	Low	-2.69	-3.39	-0.02	0.23	3.65	3.86	24.00	20.14
		Mid	-2.78	-3.01	0.12	0.23		4.00	24.00	20.00
		High	-2.66	-3.11	0.13	0.23		4.01	24.00	19.99
	6 145	Low	-3.02	-3.31	-0.15	0.23		3.73	24.00	20.27
		Mid	-3.04	-4.46	-0.68	0.23		3.20	24.00	20.80
		High	-3.15	-3.35	-0.24	0.23		3.64	24.00	20.36
	6 385	Low	-3.17	-3.65	-0.39	0.23		3.49	24.00	20.51
		Mid	-2.79	-4.06	-0.37	0.23		3.51	24.00	20.49
		High	-2.74	-3.84	-0.24	0.23		3.64	24.00	20.36
	6 465	Low	-2.17	-2.78	0.55	0.23		4.43	24.00	19.57
		Mid	-1.61	-3.04	0.74	0.23		4.62	24.00	19.38
		High	-1.57	-2.84	0.85	0.23		4.73	24.00	19.27
	6 545	Low	-1.93	-3.22	0.48	0.23		4.36	24.00	19.64
		Mid	-1.83	-3.22	0.54	0.23		4.42	24.00	19.58
		High	-1.91	-3.01	0.59	0.23		4.47	24.00	19.53
	6 705	Low	-1.70	-3.42	0.53	0.23		4.41	24.00	19.59
		Mid	-2.04	-3.24	0.41	0.23		4.29	24.00	19.71
		High	-2.10	-2.97	0.50	0.23		4.38	24.00	19.62
	6 865	Low	-2.52	-3.13	0.20	0.23		4.08	24.00	19.92
		Mid	-2.48	-3.34	0.12	0.23		4.00	24.00	20.00
		High	-2.25	-2.82	0.48	0.23		4.36	24.00	19.64
	6 945	Low	-2.11	-2.44	0.74	0.23		4.62	24.00	19.38
		Mid	-1.86	-2.51	0.84	0.23		4.72	24.00	19.28
		High	-1.83	-2.27	0.97	0.23		4.85	24.00	19.15
7 025	Low	-1.84	-2.36	0.92	0.23	4.80	24.00	19.20		
	Mid	-1.74	-2.41	0.95	0.23	4.83	24.00	19.17		
	High	-1.65	-2.21	1.09	0.23	4.97	24.00	19.03		
Measurement uncertainty			± 1.5 dB							



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2023-00952
 Page (122) / (427) Pages

Test Mode	Frequency (MHz)	RU Index	Output Power (dBm)			Duty cycle Factor (dB)	Antenna Gain (dBi)	Result Output Power (dBm)	Limit (dBm)	Margin (dB)
			ANT0	ANT1	ANT0+ANT1					
802.11 ax HE80 _242T	5 985	Low	0.75	0.24	3.51	0.27	3.65	7.43	24.00	16.57
		Mid	0.80	0.36	3.60	0.27		7.52	24.00	16.48
		High	0.87	0.16	3.54	0.27		7.46	24.00	16.54
	6 145	Low	0.44	0.10	3.28	0.27		7.20	24.00	16.80
		Mid	0.54	0.04	3.31	0.27		7.23	24.00	16.77
		High	0.63	-0.05	3.31	0.27		7.23	24.00	16.77
	6 385	Low	0.22	-0.17	3.04	0.27		6.96	24.00	17.04
		Mid	0.39	-0.39	3.03	0.27		6.95	24.00	17.05
		High	0.61	-0.27	3.20	0.27		7.12	24.00	16.88
	6 465	Low	0.91	0.22	3.59	0.27		7.51	24.00	16.49
		Mid	1.20	0.08	3.69	0.27		7.61	24.00	16.39
		High	1.16	-0.06	3.60	0.27		7.52	24.00	16.48
	6 545	Low	1.55	0.36	4.01	0.27		7.93	24.00	16.07
		Mid	1.48	-0.67	3.55	0.27		7.47	24.00	16.53
		High	0.95	0.35	3.67	0.27		7.59	24.00	16.41
	6 705	Low	1.28	0.28	3.82	0.27		7.74	24.00	16.26
		Mid	1.28	0.43	3.89	0.27		7.81	24.00	16.19
		High	1.23	0.38	3.84	0.27		7.76	24.00	16.24
	6 865	Low	0.87	0.28	3.60	0.27		7.52	24.00	16.48
		Mid	1.02	0.59	3.82	0.27		7.74	24.00	16.26
		High	0.87	0.47	3.68	0.27		7.60	24.00	16.40
	6 945	Low	0.95	0.53	3.76	0.27		7.68	24.00	16.32
		Mid	1.08	0.56	3.84	0.27		7.76	24.00	16.24
		High	0.96	0.43	3.71	0.27		7.63	24.00	16.37
7 025	Low	1.26	0.70	4.00	0.27	7.92	24.00	16.08		
	Mid	1.22	0.68	3.97	0.27	7.89	24.00	16.11		
	High	1.25	0.65	3.97	0.27	7.89	24.00	16.11		
Measurement uncertainty			± 1.5 dB							



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2023-00952
 Page (123) / (427) Pages

Test Mode	Frequency (MHz)	RU Index	Output Power (dBm)			Duty cycle Factor (dB)	Antenna Gain (dBi)	Result Output Power (dBm)	Limit (dBm)	Margin (dB)
			ANT0	ANT1	ANT0+ANT1					
802.11 ax HE80 _484T	5 985	Low	3.49	2.79	6.16	0.28	3.65	10.09	24.00	13.91
		Mid	-					-		
		High	3.64	3.02	6.35	0.28		10.28	24.00	13.72
	6 145	Low	3.04	2.85	5.96	0.28		9.89	24.00	14.11
		Mid	-					-		
		High	3.24	2.78	6.03	0.28		9.96	24.00	14.04
	6 385	Low	3.20	2.41	5.83	0.28		9.76	24.00	14.24
		Mid	-					-		
		High	3.33	2.43	5.91	0.28		9.84	24.00	14.16
	6 465	Low	4.37	3.20	6.83	0.28		10.76	24.00	13.24
		Mid	-					-		
		High	4.79	3.14	7.05	0.28		10.98	24.00	13.02
	6 545	Low	4.77	3.00	6.98	0.28		10.91	24.00	13.09
		Mid	-					-		
		High	4.58	2.83	6.80	0.28		10.73	24.00	13.27
	6 705	Low	4.71	3.06	6.97	0.28		10.90	24.00	13.10
		Mid	-					-		
		High	4.60	3.17	6.95	0.28		10.88	24.00	13.12
	6 865	Low	4.26	3.50	6.91	0.28		10.84	24.00	13.16
		Mid	-					-		
		High	4.50	3.50	7.04	0.28		10.97	24.00	13.03
	6 945	Low	3.63	3.12	6.39	0.28		10.32	24.00	13.68
		Mid	-					-		
		High	3.70	3.16	6.45	0.28		10.38	24.00	13.62
7 025	Low	3.80	3.42	6.62	0.28	10.55	24.00	13.45		
	Mid	-				-				
	High	3.88	3.42	6.67	0.28	10.60	24.00	13.40		
Measurement uncertainty		± 1.5 dB								



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2023-00952
 Page (124) / (427) Pages




Test Mode	Frequency (MHz)	Output Power (dBm)			Duty cycle Factor (dB)	Antenna Gain (dBi)	Result Output Power (dBm)	Limit (dBm)	Margin (dB)
		ANT0	ANT1	ANT0+ ANT1					
802.11 ax _HE80 _996T	5 985	5.87	5.76	8.83	0.29	3.65	12.77	24.00	11.23
	6 145	3.69	6.18	8.12	0.29		12.06	24.00	11.94
	6 385	4.80	4.53	7.68	0.29		11.62	24.00	12.38
	6 465	5.92	5.55	8.75	0.29		12.69	24.00	11.31
	6 545	6.04	4.91	8.52	0.29		12.46	24.00	11.54
	6 705	5.08	6.57	8.90	0.29		12.84	24.00	11.16
	6 865	6.12	7.57	9.92	0.29		13.86	24.00	10.14
	6 945	5.19	8.09	9.89	0.29		13.83	24.00	10.17
	7 025	5.14	5.91	8.55	0.29	12.49	24.00	11.51	
Measurement uncertainty		± 1.5 dB							

See next pages for actual measured spectrum plots.




CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2023-00952
 Page (125) / (427) Pages

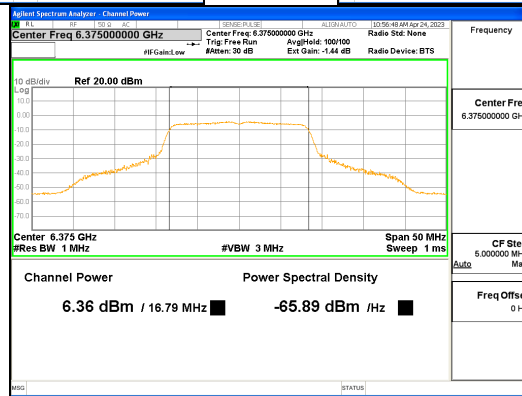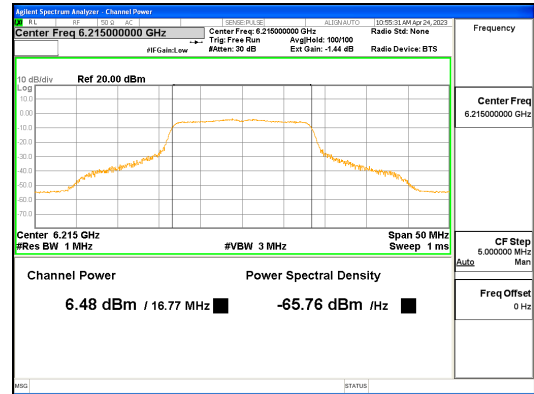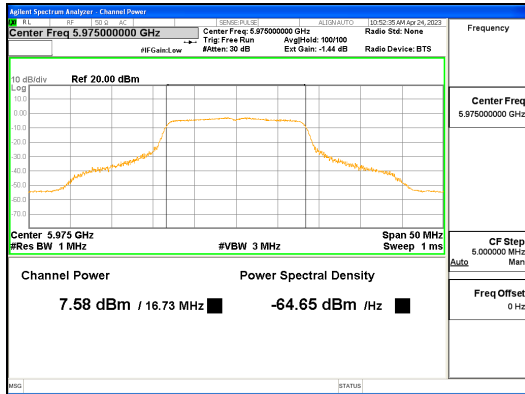

ANTO_802.11a_UNII 5



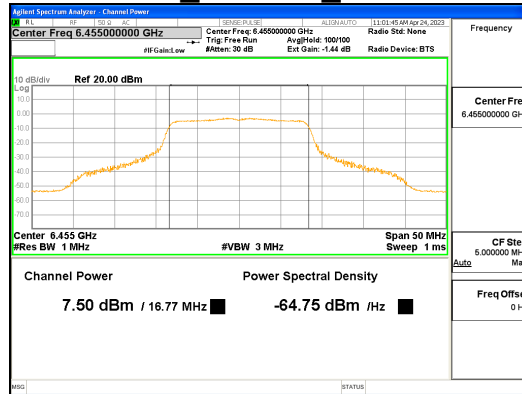


ANTO_802.11a_UNII 6






CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2023-00952
 Page (126) / (427) Pages

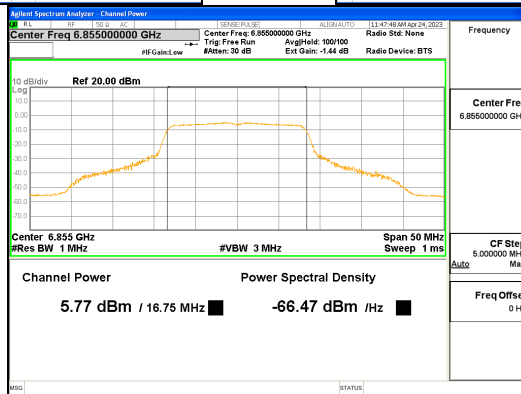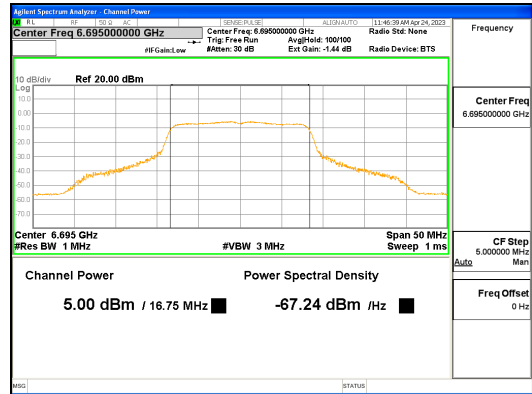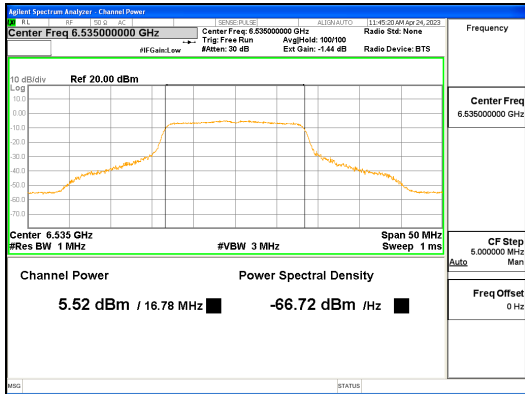

ANT0_802.11a_UNII 7

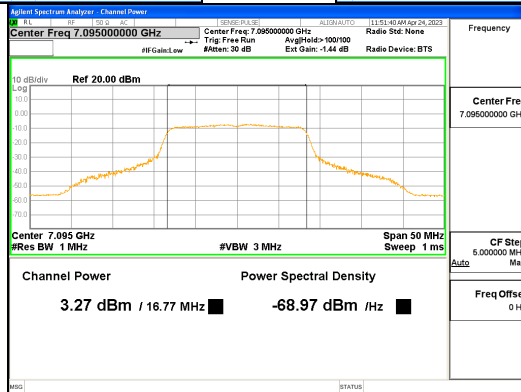
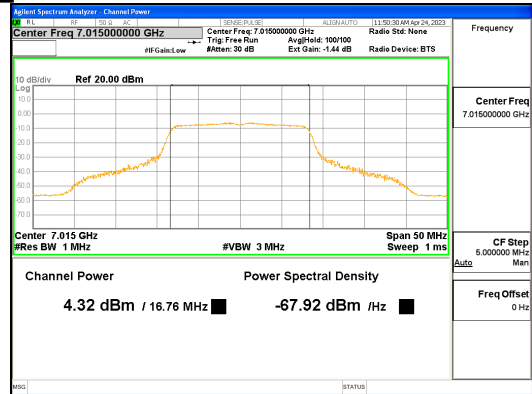
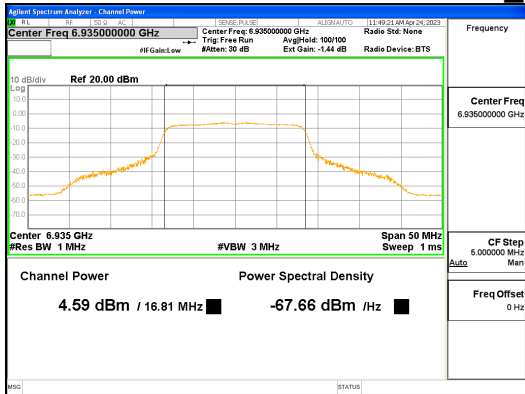


ANT0_802.11a_UNII 8




CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2023-00952
 Page (127) / (427) Pages

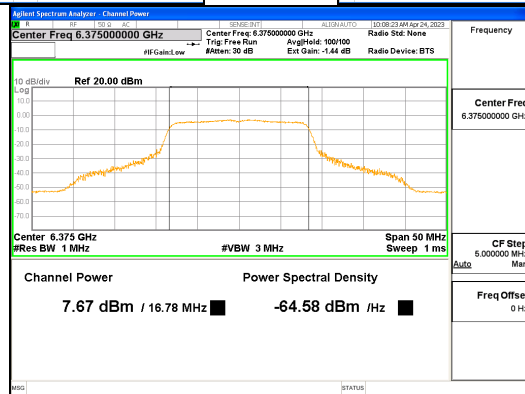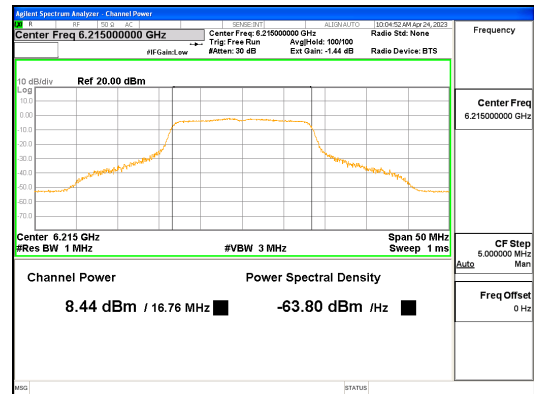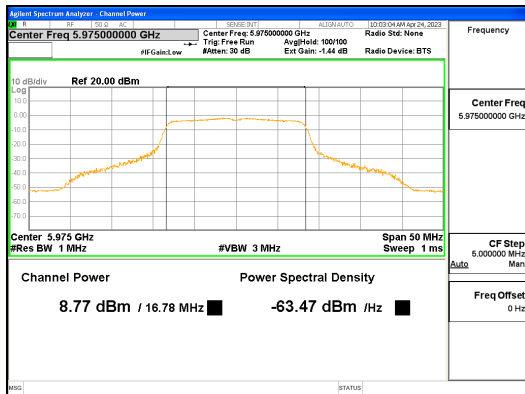

ANT1_802.11a_UNII 5



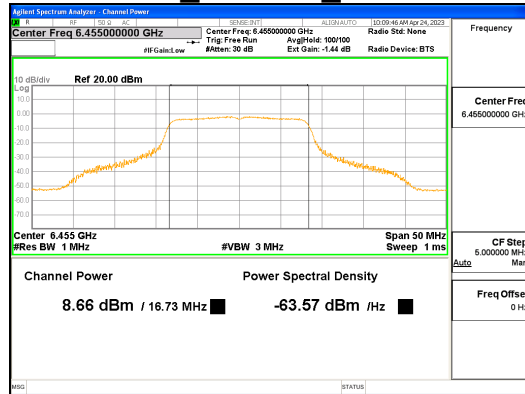


ANT1_802.11a_UNII 6






CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2023-00952
 Page (128) / (427) Pages

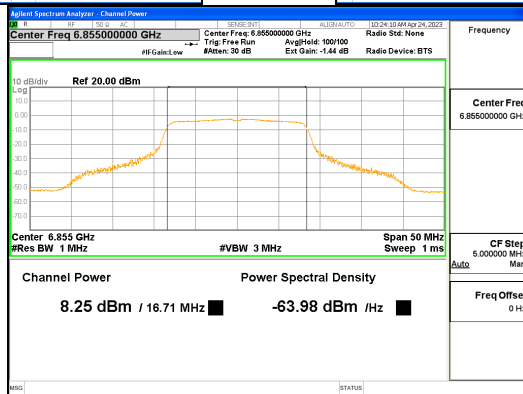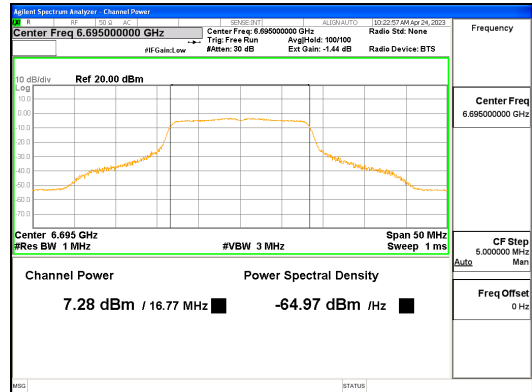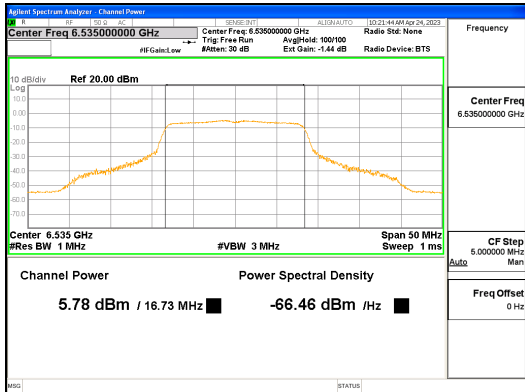

ANT1_802.11a_UNII 7

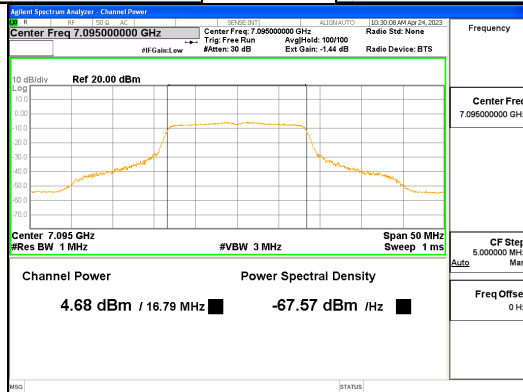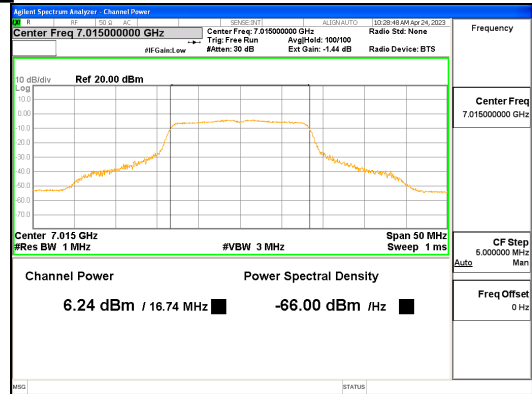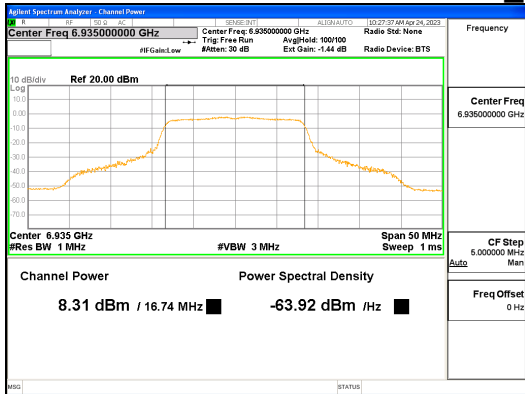

ANT1_802.11a_UNII 8



4.3 Power Spectral Density

Test Procedures

KDB 987594 – Section F
KDB 789033 – Section F (Method SA-2, Maximum Power Spectral Density)
KDB 662911 D01, D02 (Multiple Transmitter Output)
ANSI C63.10-2013 – Section 12.5

The peak power density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating in transmission mode at the appropriate frequencies.

Test Settings :

Center frequency = the highest, middle and the lowest channels

- a) RBW = 1 MHz
- b) VBW = 3 MHz
- c) Sweep time = auto
- d) Detector = power averaging (rms)
- e) Trace mode = Average at least 100
- f) Duty cycle factor = $10\log(1/x)$

Test mode	Duty Cycle Factor (dB)
802.11a	0.13
802.11ax HE20/40/80 26T	0.21
802.11ax HE20/40/80 52T	0.22
802.11ax HE20/40/80 106T	0.23
802.11ax HE20 242T	0.27
802.11ax HE40 242T	0.26
802.11ax HE40 484T	0.27
802.11ax HE80 242T	0.27
802.11ax HE80 484T	0.28
802.11ax HE80 996T	0.29

Limit

Operating Mode	ANT Configuration	ANT Gain (dBi)	Mode	Band	Limit (dBm)
SISO	ANT0, ANT1	1.27, -0.04	802.11a/ax	UNII 5	-1.00 ERIP
				UNII 6	
				UNII 7	
				UNII 8	
MIMO (2Tx)	ANT0 + ANT1	3.65	802.11ax	UNII 5	
				UNII 6	
				UNII 7	
				UNII 8	

Note :

Per KDB 662911, the MIMO directional gain is calculated using the following formula, Where G_N is the gain of the nth antenna and N_{ANT} , the total number of antennas used.

$$\text{Directional gain} = 10 \log[(10^{G_1/20} + 10^{G_2/20} + \dots + 10^{G_N/20})^2 / N_{ANT}] \text{ dBi}$$



Test Data

ANT0(SISO)

Test Mode	Frequency (MHz)	Measured Power Density (dBm)	Duty cycle Factor (dB)	Antenna Gain (dBi)	Result Power Density (dBm)	Limit (dBm)	Margin (dB)
802.11a	5 975 MHz	-2.93	0.13	1.27	-1.53	-1.00	0.53
	6 215 MHz	-4.02	0.13		-2.62	-1.00	1.62
	6 375 MHz	-3.90	0.13		-2.50	-1.00	1.50
	6 455 MHz	-2.95	0.13		-1.55	-1.00	0.55
	6 535 MHz	-4.94	0.13		-3.54	-1.00	2.54
	6 695 MHz	-5.33	0.13		-3.93	-1.00	2.93
	6 855 MHz	-4.76	0.13		-3.36	-1.00	2.36
	6 935 MHz	-5.80	0.13		-4.40	-1.00	3.40
	7 105 MHz	-6.06	0.13		-4.66	-1.00	3.66
	7 095 MHz	-7.30	0.13		-5.90	-1.00	4.90
Measurement uncertainty		± 1.5 dB					

Test Mode	Frequency (MHz)	RU Index	Measured Power Density (dBm)	Duty cycle Factor (dB)	Antenna Gain (dBi)	Result Power Density (dBm)	Limit (dBm)	Margin (dB)
802.11ax _HE20 _26T	5 955	Low	-9.19	0.21	1.27	-7.71	-1.00	6.71
		Mid	-9.91	0.21		-8.43	-1.00	7.43
		High	-8.88	0.21		-7.40	-1.00	6.40
	6 175	Low	-10.70	0.21		-9.22	-1.00	8.22
		Mid	-11.33	0.21		-9.85	-1.00	8.85
		High	-10.25	0.21		-8.77	-1.00	7.77
	6 415	Low	-10.05	0.21		-8.57	-1.00	7.57
		Mid	-10.62	0.21		-9.14	-1.00	8.14
		High	-9.90	0.21		-8.42	-1.00	7.42
	6 435	Low	-9.81	0.21		-8.33	-1.00	7.33
		Mid	-10.51	0.21		-9.03	-1.00	8.03
		High	-9.97	0.21		-8.49	-1.00	7.49
	6 475	Low	-9.31	0.21		-7.83	-1.00	6.83
		Mid	-10.55	0.21		-9.07	-1.00	8.07
		High	-9.53	0.21		-8.05	-1.00	7.05
	6 515	Low	-8.98	0.21		-7.50	-1.00	6.50
		Mid	-10.09	0.21		-8.61	-1.00	7.61
		High	-9.34	0.21		-7.86	-1.00	6.86



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2023-00952
 Page (132) / (427) Pages

6 535	Low	-9.21	0.21		-7.73	-1.00	6.73
	Mid	-9.96	0.21		-8.48	-1.00	7.48
	High	-9.71	0.21		-8.23	-1.00	7.23
6 695	Low	-9.39	0.21		-7.91	-1.00	6.91
	Mid	-10.72	0.21		-9.24	-1.00	8.24
	High	-9.76	0.21		-8.28	-1.00	7.28
6 855	Low	-9.62	0.21		-8.14	-1.00	7.14
	Mid	-10.64	0.21		-9.16	-1.00	8.16
	High	-9.78	0.21		-8.30	-1.00	7.30
6 875	Low	-10.00	0.21		-8.52	-1.00	7.52
	Mid	-11.04	0.21		-9.56	-1.00	8.56
	High	-9.99	0.21		-8.51	-1.00	7.51
6 995	Low	-9.14	0.21		-7.66	-1.00	6.66
	Mid	-9.96	0.21		-8.48	-1.00	7.48
	High	-9.22	0.21		-7.74	-1.00	6.74
7 095	Low	-10.22	0.21		-8.74	-1.00	7.74
	Mid	-11.11	0.21		-9.63	-1.00	8.63
	High	-10.01	0.21		-8.53	-1.00	7.53
7 115	Low	-12.29	0.21		-10.81	-1.00	9.81
	Mid	-12.83	0.21		-11.35	-1.00	10.35
	High	-12.24	0.21		-10.76	-1.00	9.76

Measurement uncertainty

± 1.5 dB

Test Mode	Frequency (MHz)	RU Index	Measured Power Density (dBm)	Duty cycle Factor (dB)	Antenna Gain (dBi)	Result Power Density (dBm)	Limit (dBm)	Margin (dB)
802.11ax _HE20 _52T	5 955	Low	-10.25	0.22	1.27	-8.76	-1.00	7.76
		Mid	-9.92	0.22		-8.43	-1.00	7.43
		High	-10.20	0.22		-8.71	-1.00	7.71
	6 175	Low	-11.98	0.22		-10.49	-1.00	9.49
		Mid	-11.86	0.22		-10.37	-1.00	9.37
		High	-11.54	0.22		-10.05	-1.00	9.05
	6 415	Low	-11.06	0.22		-9.57	-1.00	8.57
		Mid	-11.10	0.22		-9.61	-1.00	8.61
		High	-11.21	0.22		-9.72	-1.00	8.72
	6 435	Low	-10.75	0.22		-9.26	-1.00	8.26
		Mid	-10.65	0.22		-9.16	-1.00	8.16
		High	-10.72	0.22		-9.23	-1.00	8.23
	6 475	Low	-10.74	0.22		-9.25	-1.00	8.25



	6 515	Mid	-10.71	0.22	1.27	-9.22	-1.00	8.22
		High	-10.79	0.22		-9.30	-1.00	8.30
		Low	-10.49	0.22		-9.00	-1.00	8.00
	6 535	Mid	-10.39	0.22		-8.90	-1.00	7.90
		High	-10.59	0.22		-9.10	-1.00	8.10
		Low	-10.72	0.22		-9.23	-1.00	8.23
	6 695	Mid	-10.66	0.22		-9.17	-1.00	8.17
		High	-10.61	0.22		-9.12	-1.00	8.12
		Low	-10.98	0.22		-9.49	-1.00	8.49
	6 855	Mid	-11.20	0.22		-9.71	-1.00	8.71
		High	-10.89	0.22		-9.40	-1.00	8.40
		Low	-10.83	0.22		-9.34	-1.00	8.34
	6 875	Mid	-10.84	0.22		-9.35	-1.00	8.35
		High	-11.07	0.22		-9.58	-1.00	8.58
		Low	-13.20	0.22		-11.71	-1.00	10.71
	6 995	Mid	-11.36	0.22		-9.87	-1.00	8.87
		High	-11.42	0.22		-9.93	-1.00	8.93
		Low	-10.94	0.22		-9.45	-1.00	8.45
	7 095	Mid	-10.64	0.22		-9.15	-1.00	8.15
		High	-10.47	0.22		-8.98	-1.00	7.98
		Low	-11.84	0.22		-10.35	-1.00	9.35
	7 115	Mid	-11.79	0.22		-10.30	-1.00	9.30
		High	-11.68	0.22		-10.19	-1.00	9.19
		Low	-11.91	0.22		-10.42	-1.00	9.42
		Mid	-11.87	0.22		-10.38	-1.00	9.38
		High	-11.66	0.22		-10.17	-1.00	9.17
		Low						

Measurement uncertainty

± 1.5 dB

Test Mode	Frequency (MHz)	RU Index	Measured Power Density (dBm)	Duty cycle Factor (dB)	Antenna Gain (dBi)	Result Power Density (dBm)	Limit (dBm)	Margin (dB)
802.11ax _HE20 _106T	5 955	Low	-11.03	0.23	1.27	-9.53	-1.00	8.53
		Mid	-	-				
		High	-11.08	0.23		-9.58	-1.00	8.58
	6 175	Low	-12.75	0.23		-11.25	-1.00	10.25
		Mid	-	-				
		High	-12.84	0.23		-11.34	-1.00	10.34
	6 415	Low	-11.89	0.23		-10.39	-1.00	9.39
		Mid	-	-				



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2023-00952
 Page (134) / (427) Pages

	High	-12.02	0.23		-10.52	-1.00	9.52
6 435	Low	-11.11	0.23		-9.61	-1.00	8.61
	Mid	-			-		
	High	-10.78	0.23		-9.28	-1.00	8.28
6 475	Low	-10.62	0.23		-9.12	-1.00	8.12
	Mid	-			-		
	High	-10.97	0.23		-9.47	-1.00	8.47
6 515	Low	-10.72	0.23		-9.22	-1.00	8.22
	Mid	-			-		
	High	-10.78	0.23		-9.28	-1.00	8.28
6 535	Low	-11.06	0.23		-9.56	-1.00	8.56
	Mid	-			-		
	High	-11.04	0.23		-9.54	-1.00	8.54
6 695	Low	-11.69	0.23		-10.19	-1.00	9.19
	Mid	-			-		
	High	-11.93	0.23		-10.43	-1.00	9.43
6 855	Low	-10.87	0.23		-9.37	-1.00	8.37
	Mid	-			-		
	High	-11.19	0.23		-9.69	-1.00	8.69
6 875	Low	-11.31	0.23		-9.81	-1.00	8.81
	Mid	-			-		
	High	-11.38	0.23		-9.88	-1.00	8.88
6 995	Low	-10.62	0.23		-9.12	-1.00	8.12
	Mid	-			-		
	High	-10.56	0.23		-9.06	-1.00	8.06
7 095	Low	-12.01	0.23		-10.51	-1.00	9.51
	Mid	-			-		
	High	-11.70	0.23		-10.20	-1.00	9.20
7 115	Low	-11.74	0.23		-10.24	-1.00	9.24
	Mid	-			-		
	High	-11.79	0.23		-10.29	-1.00	9.29
Measurement uncertainty					± 1.5 dB		



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2023-00952
 Page (135) / (427) Pages

Test Mode	Frequency (MHz)	Measured Power Density (dBm)	Duty cycle Factor (dB)	Antenna Gain (dBi)	Result Power Density (dBm)	Limit (dBm)	Margin (dB)
802.11ax _HE20 _242T	5 955	-10.96	0.27	1.27	-9.42	-1.00	8.42
	6 175	-12.79	0.27		-11.25	-1.00	10.25
	6 415	-11.55	0.27		-10.01	-1.00	9.01
	6 435	-11.00	0.27		-9.46	-1.00	8.46
	6 475	-10.75	0.27		-9.21	-1.00	8.21
	6 515	-10.61	0.27		-9.07	-1.00	8.07
	6 535	-10.76	0.27		-9.22	-1.00	8.22
	6 695	-11.95	0.27		-10.41	-1.00	9.41
	6 855	-11.22	0.27		-9.68	-1.00	8.68
	6 875	-11.54	0.27		-10.00	-1.00	9.00
	6 995	-11.08	0.27		-9.54	-1.00	8.54
	7 095	-12.33	0.27		-10.79	-1.00	9.79
	7 115	-12.33	0.27		-10.79	-1.00	9.79
Measurement uncertainty		± 1.5 dB					



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2023-00952
 Page (136) / (427) Pages

Test Mode	Frequency (MHz)	RU Index	Measured Power Density (dBm)	Duty cycle Factor (dB)	Antenna Gain (dBi)	Result Power Density (dBm)	Limit (dBm)	Margin (dB)
802.11ax _HE40 _26T	5 965	Low	-8.65	0.21	1.27	-7.17	-1.00	6.17
		Mid	-8.08	0.21		-6.60	-1.00	5.60
		High	-8.25	0.21		-6.77	-1.00	5.77
	6 165	Low	-8.68	0.21		-7.20	-1.00	6.20
		Mid	-8.02	0.21		-6.54	-1.00	5.54
		High	-8.36	0.21		-6.88	-1.00	5.88
	6 405	Low	-9.70	0.21		-8.22	-1.00	7.22
		Mid	-8.85	0.21		-7.37	-1.00	6.37
		High	-9.22	0.21		-7.74	-1.00	6.74
	6 445	Low	-9.04	0.21		-7.56	-1.00	6.56
		Mid	-8.17	0.21		-6.69	-1.00	5.69
		High	-8.55	0.21		-7.07	-1.00	6.07
	6 485	Low	-8.78	0.21		-7.30	-1.00	6.30
		Mid	-8.54	0.21		-7.06	-1.00	6.06
		High	-8.45	0.21		-6.97	-1.00	5.97
	6 525	Low	-8.74	0.21		-7.26	-1.00	6.26
		Mid	-8.64	0.21		-7.16	-1.00	6.16
		High	-9.11	0.21		-7.63	-1.00	6.63
	6 685	Low	-7.63	0.21		-6.15	-1.00	5.15
		Mid	-7.36	0.21		-5.88	-1.00	4.88
		High	-7.66	0.21		-6.18	-1.00	5.18
	6 845	Low	-8.85	0.21		-7.37	-1.00	6.37
		Mid	-8.64	0.21		-7.16	-1.00	6.16
		High	-8.89	0.21		-7.41	-1.00	6.41
	6 885	Low	-7.96	0.21		-6.48	-1.00	5.48
		Mid	-7.52	0.21		-6.04	-1.00	5.04
		High	-7.80	0.21		-6.32	-1.00	5.32
7 005	Low	-7.98	0.21	-6.50	-1.00	5.50		
	Mid	-7.74	0.21	-6.26	-1.00	5.26		
	High	-8.21	0.21	-6.73	-1.00	5.73		
7 085	Low	-8.21	0.21	-6.73	-1.00	5.73		
	Mid	-7.97	0.21	-6.49	-1.00	5.49		
	High	-7.86	0.21	-6.38	-1.00	5.38		
Measurement uncertainty			± 1.5 dB					



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2023-00952
 Page (137) / (427) Pages

Test Mode	Frequency (MHz)	RU Index	Measured Power Density (dBm)	Duty cycle Factor (dB)	Antenna Gain (dBi)	Result Power Density (dBm)	Limit (dBm)	Margin (dB)
802.11ax _HE40 _52T	5 965	Low	-9.84	0.22	1.27	-8.35	-1.00	7.35
		Mid	-9.37	0.22		-7.88	-1.00	6.88
		High	-9.55	0.22		-8.06	-1.00	7.06
	6 165	Low	-9.58	0.22		-8.09	-1.00	7.09
		Mid	-9.03	0.22		-7.54	-1.00	6.54
		High	-9.75	0.22		-8.26	-1.00	7.26
	6 405	Low	-10.50	0.22		-9.01	-1.00	8.01
		Mid	-10.20	0.22		-8.71	-1.00	7.71
		High	-10.53	0.22		-9.04	-1.00	8.04
	6 445	Low	-10.35	0.22		-8.86	-1.00	7.86
		Mid	-10.08	0.22		-8.59	-1.00	7.59
		High	-9.52	0.22		-8.03	-1.00	7.03
	6 485	Low	-9.68	0.22		-8.19	-1.00	7.19
		Mid	-9.72	0.22		-8.23	-1.00	7.23
		High	-9.60	0.22		-8.11	-1.00	7.11
	6 525	Low	-10.20	0.22		-8.71	-1.00	7.71
		Mid	-9.81	0.22		-8.32	-1.00	7.32
		High	-9.95	0.22		-8.46	-1.00	7.46
	6 685	Low	-8.80	0.22		-7.31	-1.00	6.31
		Mid	-8.78	0.22		-7.29	-1.00	6.29
		High	-9.02	0.22		-7.53	-1.00	6.53
	6 845	Low	-9.95	0.22		-8.46	-1.00	7.46
		Mid	-9.89	0.22		-8.40	-1.00	7.40
		High	-10.27	0.22		-8.78	-1.00	7.78
	6 885	Low	-9.81	0.22		-8.32	-1.00	7.32
		Mid	-9.23	0.22		-7.74	-1.00	6.74
		High	-9.48	0.22		-7.99	-1.00	6.99
7 005	Low	-10.03	0.22	-8.54	-1.00	7.54		
	Mid	-9.40	0.22	-7.91	-1.00	6.91		
	High	-10.03	0.22	-8.54	-1.00	7.54		
7 085	Low	-9.97	0.22	-8.48	-1.00	7.48		
	Mid	-9.79	0.22	-8.30	-1.00	7.30		
	High	-9.92	0.22	-8.43	-1.00	7.43		
Measurement uncertainty			± 1.5 dB					



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2023-00952
 Page (138) / (427) Pages

Test Mode	Frequency (MHz)	RU Index	Measured Power Density (dBm)	Duty cycle Factor (dB)	Antenna Gain (dBi)	Result Power Density (dBm)	Limit (dBm)	Margin (dB)
802.11ax _HE40 _106T	5 965	Low	-10.46	0.23	1.27	-8.96	-1.00	7.96
		Mid	-10.36	0.23		-8.86	-1.00	7.86
		High	-10.63	0.23		-9.13	-1.00	8.13
	6 165	Low	-10.56	0.23		-9.06	-1.00	8.06
		Mid	-10.64	0.23		-9.14	-1.00	8.14
		High	-10.66	0.23		-9.16	-1.00	8.16
	6 405	Low	-11.21	0.23		-9.71	-1.00	8.71
		Mid	-10.91	0.23		-9.41	-1.00	8.41
		High	-10.84	0.23		-9.34	-1.00	8.34
	6 445	Low	-10.14	0.23		-8.64	-1.00	7.64
		Mid	-9.71	0.23		-8.21	-1.00	7.21
		High	-9.74	0.23		-8.24	-1.00	7.24
	6 485	Low	-9.85	0.23		-8.35	-1.00	7.35
		Mid	-10.06	0.23		-8.56	-1.00	7.56
		High	-9.98	0.23		-8.48	-1.00	7.48
	6 525	Low	-10.27	0.23		-8.77	-1.00	7.77
		Mid	-10.15	0.23		-8.65	-1.00	7.65
		High	-10.53	0.23		-9.03	-1.00	8.03
	6 685	Low	-9.91	0.23		-8.41	-1.00	7.41
		Mid	-9.54	0.23		-8.04	-1.00	7.04
		High	-9.71	0.23		-8.21	-1.00	7.21
	6 845	Low	-9.92	0.23		-8.42	-1.00	7.42
		Mid	-10.04	0.23		-8.54	-1.00	7.54
		High	-10.39	0.23		-8.89	-1.00	7.89
	6 885	Low	-9.96	0.23		-8.46	-1.00	7.46
		Mid	-9.72	0.23		-8.22	-1.00	7.22
		High	-10.43	0.23		-8.93	-1.00	7.93
	7 005	Low	-10.04	0.23		-8.54	-1.00	7.54
		Mid	-10.03	0.23		-8.53	-1.00	7.53
		High	-10.30	0.23		-8.80	-1.00	7.80
7 085	Low	-10.31	0.23	-8.81	-1.00	7.81		
	Mid	-10.05	0.23	-8.55	-1.00	7.55		
	High	-10.47	0.23	-8.97	-1.00	7.97		
Measurement uncertainty			± 1.5 dB					



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2023-00952
 Page (139) / (427) Pages

Test Mode	Frequency (MHz)	RU Index	Measured Power Density (dBm)	Duty cycle Factor (dB)	Antenna Gain (dBi)	Result Power Density (dBm)	Limit (dBm)	Margin (dB)
802.11ax _HE40 _242T	5 965	Low	-10.27	0.26	1.27	-8.74	-1.00	7.74
		Mid	-	-				
		High	-10.25	0.26		-8.72	-1.00	7.72
	6 165	Low	-10.40	0.26		-8.87	-1.00	7.87
		Mid	-	-				
		High	-10.38	0.26		-8.85	-1.00	7.85
	6 405	Low	-10.91	0.26		-9.38	-1.00	8.38
		Mid	-	-				
		High	-10.61	0.26		-9.08	-1.00	8.08
	6 445	Low	-10.59	0.26		-9.06	-1.00	8.06
		Mid	-	-				
		High	-10.43	0.26		-8.90	-1.00	7.90
	6 485	Low	-10.38	0.26		-8.85	-1.00	7.85
		Mid	-	-				
		High	-10.39	0.26		-8.86	-1.00	7.86
	6 525	Low	-10.07	0.26		-8.54	-1.00	7.54
		Mid	-	-				
		High	-10.41	0.26		-8.88	-1.00	7.88
	6 685	Low	-9.51	0.26		-7.98	-1.00	6.98
		Mid	-	-				
		High	-9.77	0.26		-8.24	-1.00	7.24
	6 845	Low	-9.99	0.26		-8.46	-1.00	7.46
		Mid	-	-				
		High	-10.28	0.26		-8.75	-1.00	7.75
	6 885	Low	-12.61	0.26		-11.08	-1.00	10.08
		Mid	-	-				
		High	-10.41	0.26		-8.88	-1.00	7.88
7 005	Low	-10.70	0.26	-9.17	-1.00	8.17		
	Mid	-	-					
	High	-10.63	0.26	-9.10	-1.00	8.10		
7 085	Low	-10.73	0.26	-9.20	-1.00	8.20		
	Mid	-	-					
	High	-10.82	0.26	-9.29	-1.00	8.29		
Measurement uncertainty			± 1.5 dB					



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2023-00952
 Page (140) / (427) Pages

Test Mode	Frequency (MHz)	Measured Power Density (dBm)	Duty cycle Factor (dB)	Antenna Gain (dBi)	Result Power Density (dBm)	Limit (dBm)	Margin (dB)
802.11ax _HE40 _484T	5 965	-11.04	0.27	1.27	-9.50	-1.00	8.50
	6 165	-12.84	0.27		-11.30	-1.00	10.30
	6 405	-11.94	0.27		-10.40	-1.00	9.40
	6 445	-11.10	0.27		-9.56	-1.00	8.56
	6 485	-11.29	0.27		-9.75	-1.00	8.75
	6 525	-11.07	0.27		-9.53	-1.00	8.53
	6 685	-11.44	0.27		-9.90	-1.00	8.90
	6 845	-11.18	0.27		-9.64	-1.00	8.64
	6 885	-11.10	0.27		-9.56	-1.00	8.56
	7 005	-11.04	0.27		-9.50	-1.00	8.50
7 085	-12.51	0.27	-10.97	-1.00	9.97		
Measurement uncertainty		± 1.5 dB					