

# TEST REPORT



## CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu,  
Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2023-01324  
Page (1) / (52) Pages

### 1. Applicant

- Name : Samsung Electronics Co Ltd
- Address : 19 Chapin Rd, Building D. Pine Brook, New Jersey, United States
- Date of Receipt : 2023-03-20

### 2. Manufacturer

- Name : Samsung Electronics Co., Ltd.
- Address : 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Republic of Korea

### 3. Factory

- Name #1: CHEMTRONICS CO.,LTD.
- Address #1: 35, Buk-ri, Namsa-myeon, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea
- Name #2: Chengdu Xuguang Technology Co., Ltd.
- Address #2: No.86 2nd Section, Park Road, Longquanyi District, Chengdu City, Sichuan Province, P.R.China
- Name #3: CHEMTROVINA COMPANY LIMITED
- Address #3: Nhon Trach 2 - Loc Khang IZ, Hiep Phuoc Town, Nhon Trach District, Dong Nai Province, Vietnam

**4. Use of Report** : For FCC Conformance

**5. Test Sample / Model:** Wi-Fi/BT Transceiver / WCC941M

**6. Date of Test** : 2023-04-10 to 2023-05-31

**7. Test Standard(method) used** : FCC 47 CFR part 15 subpart C 15.247

**8. Testing Environment:** Temp.: (23 ± 1) °C, Humidity: (36 ± 3) % R.H.

**9. Test Results** : Compliance

**10. Location of Test** :  Permanent Testing Lab  On Site Testing

(Address : (Unhak-Dong) 5, Dongbu-ro 221beon-gil, Cheoin-gu, Yong-in-si,  
Gyeonggi-do, Korea)

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

This report cannot be reproduced or copied without the written consent of CTK.



**CTK Co., Ltd.**  
(Ho-dong), 113, Yejik-ro, Cheoin-gu,  
Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2023-01324  
Page (2) / (52) Pages

Approval	Tested by  Ji-Hye, Kim: (Signature)	Technical Manager  Won-Jae, Hwang: (Signature)
----------	--	---

Remark. This report is not related to KOLAS accreditation and relevant regulation.

2023-06-14

**CTK Co., Ltd.**



**CTK Co., Ltd.**  
(Ho-dong), 113, Yejik-ro, Cheoin-gu,  
Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2023-01324  
Page (3) / (52) Pages

## REPORT REVISION HISTORY

Date	Revision	Page No
2023-06-14	Issued (CTK-2023-01324)	all

*This report shall not be reproduced except in full, without the written approval of CTK Co., Ltd. This document may be altered or revised by CTK Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by CTK Co., Ltd. will constitute fraud and shall nullify the document.*



**CTK Co., Ltd.**  
(Ho-dong), 113, Yejik-ro, Cheoin-gu,  
Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2023-01324  
Page (4) / (52) Pages

## **CONTENTS**

1. General Product Description .....	5
1.1 Applicant Information .....	5
1.2 Product Information.....	5
1.3 Peripheral Devices .....	5
1.4 Model Differences .....	5
2. Accreditations .....	6
2.1 Laboratory Accreditations and Listings .....	6
2.2 Calibration Details of Equipment Used for Measurement .....	6
3. Test Specifications .....	7
3.1 Standards.....	7
3.2 Mode of operation during the test .....	8
3.3 Device Modifications .....	8
3.4 Maximum Measurement Uncertainty .....	8
3.5 Test Software.....	8
4. Technical Characteristic Test.....	9
4.1 6dB Bandwidth.....	9
4.2 Maximum peak Conducted Output Power.....	15
4.3 Transmitter Power Spectral Density.....	21
4.4 Conducted Spurious emission .....	27
4.5 Radiated Emission .....	32
4.6 AC Conducted Emissions .....	49
APPENDIX A – Test Equipment Used For Tests .....	52



**CTK Co., Ltd.**  
(Ho-dong), 113, Yejik-ro, Cheoin-gu,  
Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2023-01324  
Page (5) / (52) Pages

## 1. General Product Description

### 1.1 Applicant Information

<b>Company</b>	Samsung Electronics Co., Ltd.
<b>Contact Point</b>	129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Republic of Korea
<b>Contact Person</b>	Name : Minhyung Cho E-mail : mh719.cho@samsung.com Tel : +82-31-277-2688 Fax : -

### 1.2 Product Information

<b>FCC ID</b>	A3LWCC941M
<b>Product Description</b>	Wi-Fi/BT Transceiver
<b>Model name</b>	WCC941M
<b>Variant Model name</b>	-
<b>Operating Frequency</b>	2 402 MHz - 2 480 MHz
<b>RF Output Power</b>	1 Mbps : 12.344 dBm (17.155 mW) 2 Mbps : 12.307 dBm (17.010 mW)
<b>Antenna Specification</b>	Antenna type : Metal Antenna Peak Gain : 0.79 dBi (BT0), 1.09 dBi (BT1)
<b>Number of channels</b>	40
<b>Channel Spacing</b>	2 MHz
<b>Type of Modulation</b>	GFSK (Bluetooth 5.0 - LE)
<b>Power Source</b>	DC 5 V
<b>Hardware Rev</b>	V2.1
<b>Software Rev</b>	FC 3
<b>RF Power setting in Test SW</b>	Initial value

### 1.3 Peripheral Devices

Device	Manufacturer	Model No.	Serial No.
Note Computer	HP	15-bs563TU	CND7253R6N
AC/DC Adapter	HP	HSTNN-LA40	-

### 1.4 Model Differences

Not applicable



**CTK Co., Ltd.**  
(Ho-dong), 113, Yejik-ro, Cheoin-gu,  
Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2023-01324  
Page (6) / (52) Pages

## 2. Accreditations

### 2.1 Laboratory Accreditations and Listings

Country	Agency	Registration Number
USA	FCC	805871
CANADA	ISED	8737A
KOREA	NRRA	KR0025

### 2.2 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less. All test equipment calibrations are traceable to the Korea Research Institute of Standards and Science (KRISS), therefore, all test data recorded in this report is traceable to KRISS.



**CTK Co., Ltd.**  
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,  
 Yongin-si, Gyeonggi-do, Korea  
 Tel: +82-31-339-9970  
 Fax: +82-31-624-9501

Report No.:  
 CTK-2023-01324  
 Page (7) / (52) Pages

### 3. Test Specifications

#### 3.1 Standards

FCC Part Section(s)	Requirement(s)	Status (Note 1)	Test Condition
15.247(a)	6 dB Bandwidth	C	Conducted
15.247(b)	Maximum Output Power	C	
15.247(d)	Conducted Spurious emission	C	
15.247(d)	Unwanted Emission(Conducted)	C	
15.247(e)	Transmitter Power Spectral Density	C	
15.209	Radiated Emissions	C	Radiated
15.207	AC Conducted Emissions	C	Line Conducted
<i>Note 1:</i> C=Complies NC=Not Complies NT=Not Tested NA=Not Applicable			
<i>Note 2:</i> The data in this test report are traceable to the national or international standards.			
<i>Note 3:</i> The sample was tested according to the following specification: FCC Part 15.247			
<i>Note 4:</i> The tests were performed according to the method of measurements prescribed in KDB No.558074, ANSI C63.10-2013			



**CTK Co., Ltd.**  
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,  
 Yongin-si, Gyeonggi-do, Korea  
 Tel: +82-31-339-9970  
 Fax: +82-31-624-9501

Report No.:  
 CTK-2023-01324  
 Page (8) / (52) Pages

### 3.2 Mode of operation during the test

The EUT is operated in a manner representative of the typical of the equipments.  
 During at testing, system components were manipulated within the confines of typical usage to maximize each emission. All modulation modes were tests.  
 The results are only attached worst cases.

#### Test Frequency

Lowest channel	Middle channel	Highest channel
2 402 MHz	2 440 MHz	2 480 MHz

#### Test mode

Mode	Duty Cycle		Duty Cycle Factor	
	BT0	BT1	BT0	BT1
1 Mbps	85.7 %	85.8 %	0.67 dB	0.67 dB
2 Mbps	58.0 %	58.0 %	2.36 dB	2.36 dB

### 3.3 Device Modifications

The following modifications were necessary for compliance:

Not applicable

### 3.4 Maximum Measurement Uncertainty

The value of the measurement uncertainty for the measurement of each parameter.  
 Coverage factor  $k = 2$ , Confidence levels of 95 %

Description	Uncertainty
Conducted RF Output Power	1.5 dB (C.L.: Approx. 95 %, $k = 2$ )
Power Spectral Density	1.5 dB (C.L.: Approx. 95 %, $k = 2$ )
Occupied Bandwidth	0.1 MHz (C.L.: Approx. 95 %, $k = 2$ )
Unwanted Emission(conducted)	3.0 dB (C.L.: Approx. 95 %, $k = 2$ )
Radiated Emissions ( $f \leq 1$ GHz)	3.88 dB (C.L.: Approx. 95 %, $k = 2$ )
Radiated Emissions ( $f > 1$ GHz)	4.50 dB (C.L.: Approx. 95 %, $k = 2$ )
Line Conducted Emission	2.08 dB (C.L.: Approx. 95 %, $k = 2$ )

### 3.5 Test Software

Conducted Test	Ics Pro Ver. 6.0.3
Radiated Test	EP5RE Ver. 6.0.1.0, ES10 Ver. 10.001
Line Conducted Test	EMC32 Ver. 10.50.0





**CTK Co., Ltd.**  
(Ho-dong), 113, Yejik-ro, Cheoin-gu,  
Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2023-01324  
Page (9) / (52) Pages

## 4. Technical Characteristic Test

### 4.1 6dB Bandwidth

#### Test Procedures

KDB 558074 - Section 8.2  
ANSI C63.10-2013 - Section 11.8.2

Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

#### Test Procedures

ANSI C63.10-2013 - Section 6.9

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission.

Use the 99% power bandwidth function of the instrument and report the measured bandwidth.

#### Test Settings :

Center frequency = the highest, middle and the lowest channels

- a) RBW = 100 kHz
- b) VBW  $\geq 3 \times$  RBW
- c) Detector = peak
- d) Trace mode = Max hold
- e) Sweep = auto couple
- f) Allow trace to fully stabilize
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

#### **Minimum Standard :**

---

6 dB Bandwidth > 500kHz

---



**CTK Co., Ltd.**  
(Ho-dong), 113, Yejik-ro, Cheoin-gu,  
Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2023-01324  
Page (10) / (52) Pages

### Test Data :

Test mode : 1 Mbps


Antenna	Frequency (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)	Result
BT0	2 402	0.667	1.051	Complies
	2 440	0.665	1.050	Complies
	2 480	0.666	1.050	Complies
BT1	2 402	0.664	1.051	Complies
	2 440	0.664	1.049	Complies
	2 480	0.664	1.051	Complies

Test mode : 2 Mbps


Antenna	Frequency (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)	Result
BT0	2 402	1.236	2.067	Complies
	2 440	1.234	2.064	Complies
	2 480	1.189	2.060	Complies
BT1	2 402	1.186	2.063	Complies
	2 440	1.190	2.065	Complies
	2 480	1.187	2.066	Complies

See next pages for actual measured spectrum plots.


### BTO, 1 Mbps - Lowest Frequency (2 402 MHz)

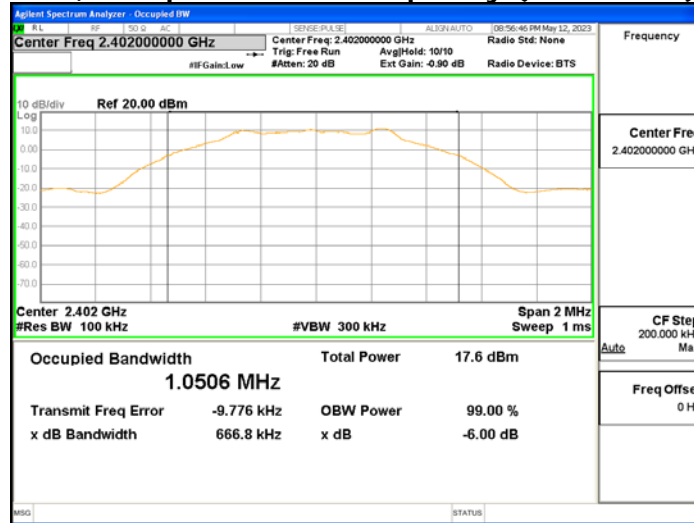


### BTO, 1 Mbps - Middle Frequency (2 440 MHz)

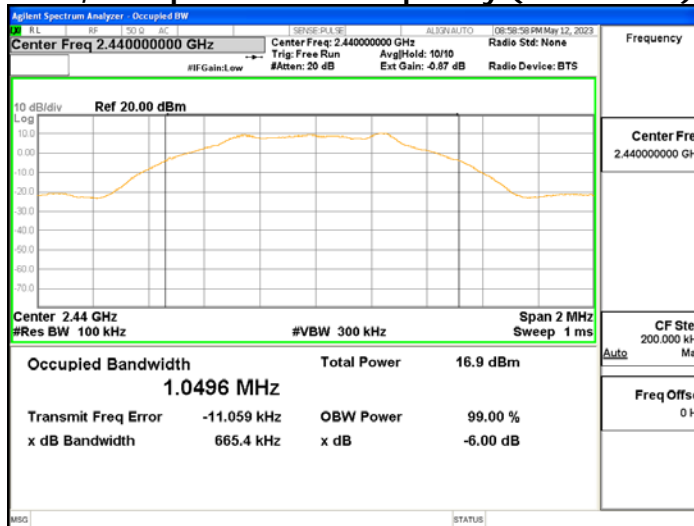


### BTO, 1 Mbps - Highest Frequency (2 480 MHz)

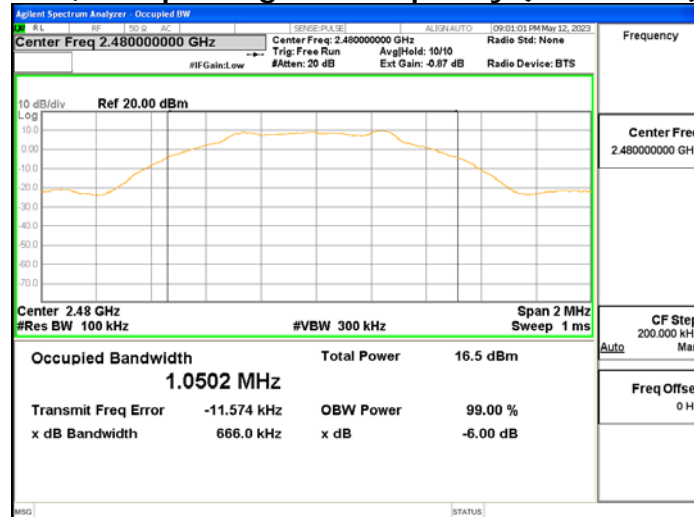


**BT1, 1 Mbps - Lowest Frequency (2 402 MHz)**

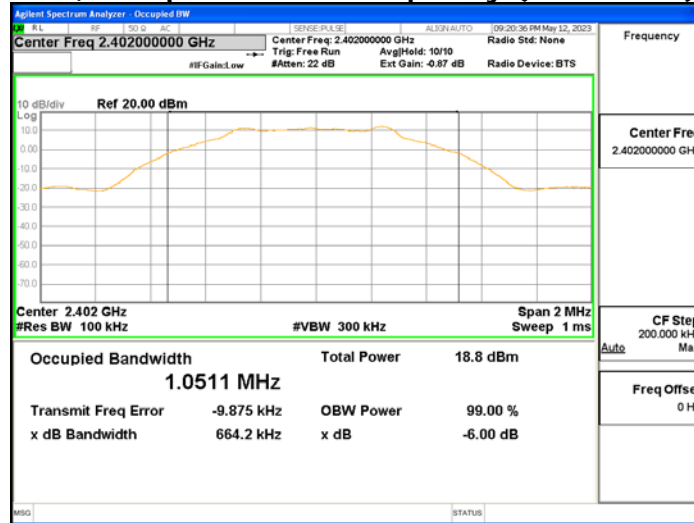


**BT1, 1 Mbps - Middle Frequency (2 440 MHz)**

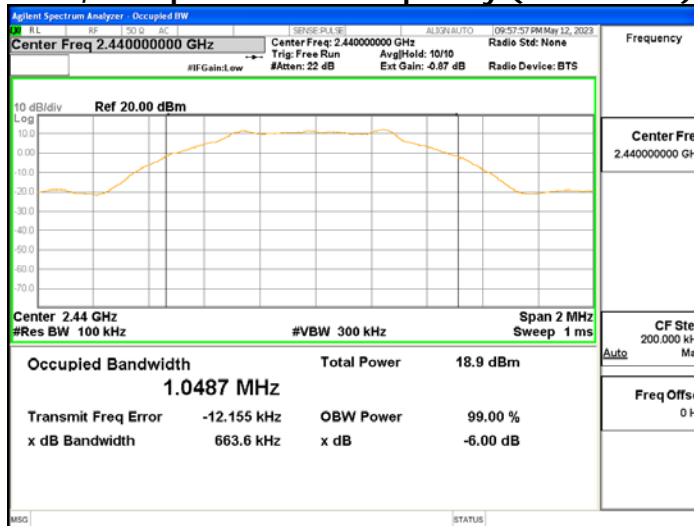


**BT1, 1 Mbps - Highest Frequency (2 480 MHz)**

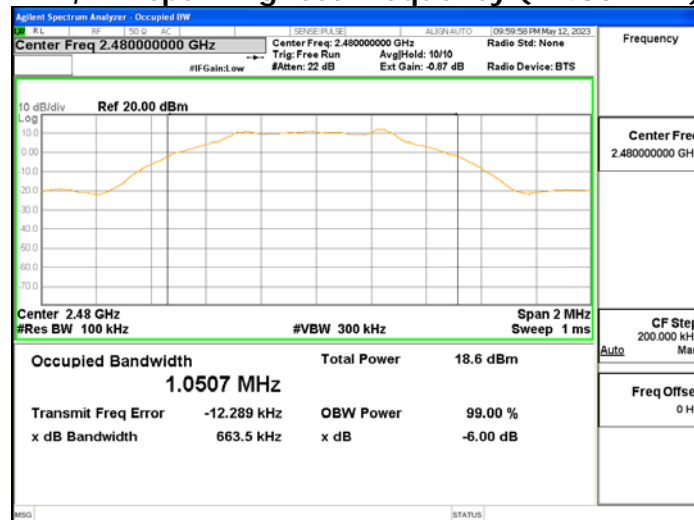


### BTO, 2 Mbps - Lowest Frequency (2 402 MHz)

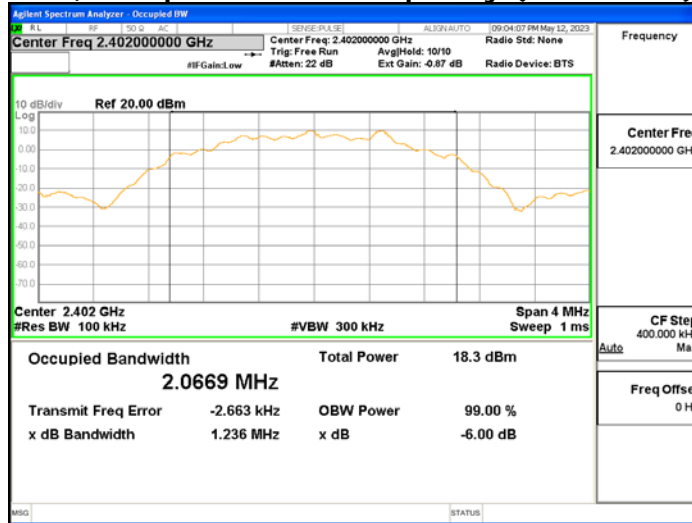


### BTO, 2 Mbps - Middle Frequency (2 440 MHz)

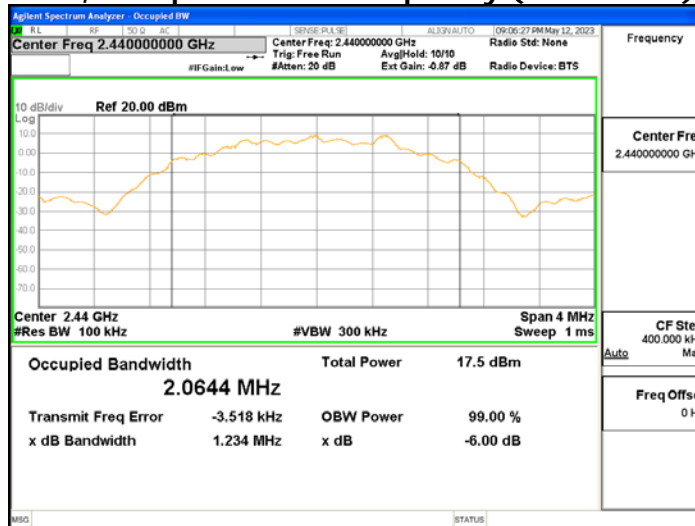


### BTO, 2 Mbps - Highest Frequency (2 480 MHz)

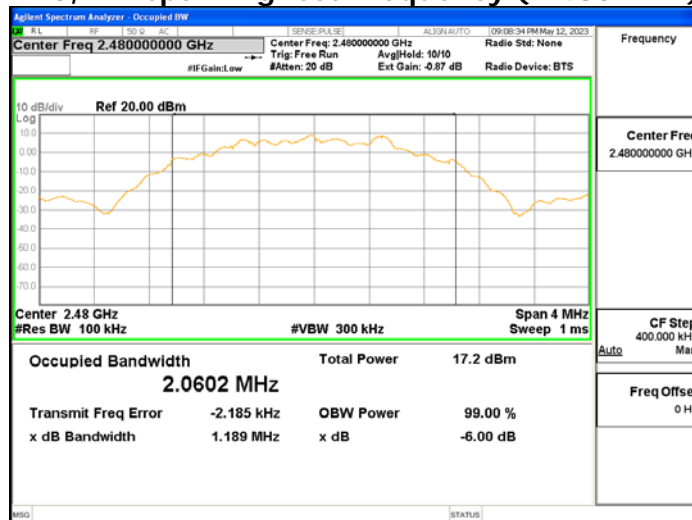


**BT1, 2 Mbps - Lowest Frequency (2 402 MHz)**

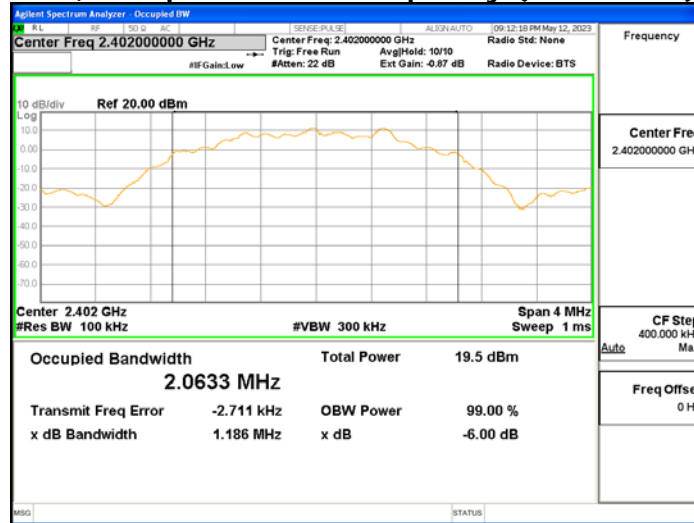

**BT1, 2 Mbps - Middle Frequency (2 440 MHz)**

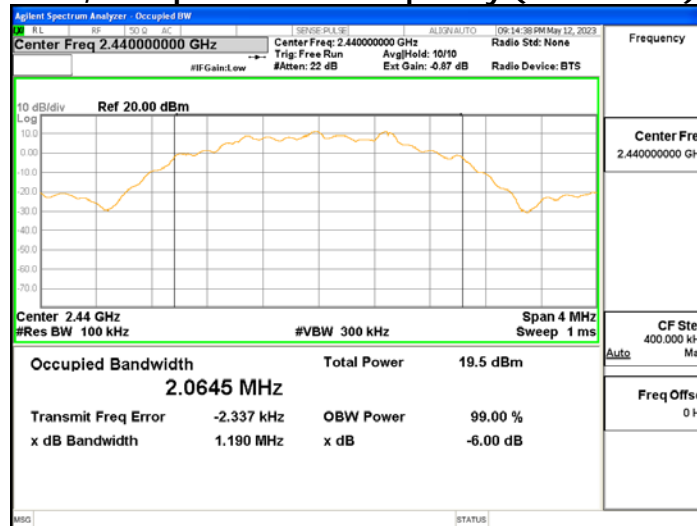

**BT1, 2 Mbps - Highest Frequency (2 480 MHz)**

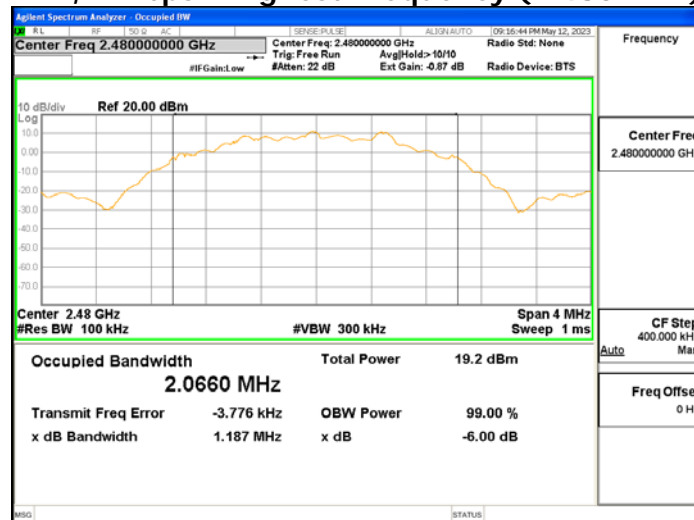



## CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu,  
Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2023-01324  
Page (15) / (52) Pages

## 4.2 Maximum peak Conducted Output Power

### Test Procedures

KDB 558074 - Section 8.3.1.1

ANSI C63.10-2013 - Section 11.9.1.1

This procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the DTS bandwidth.

#### Test Settings:

Center frequency = the highest, middle and the lowest channels

- a)  $RBW \geq DTS \text{ bandwidth}$
- b)  $VBW \geq 3 \times RBW$
- c)  $span \geq 3 \times RBW$
- d) Sweep time = auto couple
- e) Detector = peak
- f) Trace mode = max hold
- g) Allow trace to fully stabilize
- h) Use peak marker function to determine the peak amplitude level.

#### **Limit :**

---

---

Maximum Output Power < 1 W (30 dBm)

---

---



**CTK Co., Ltd.**  
(Ho-dong), 113, Yejik-ro, Cheoin-gu,  
Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2023-01324  
Page (16) / (52) Pages

**Test Data :**

Test mode : 1 Mbps

Antenna	Frequency (MHz)	Maximum peak Conducted Output Power		Result
		(dBm)	(mW)	
BT0	2 402	10.933	12.397	Complies
	2 440	10.085	10.198	Complies
	2 480	9.805	9.561	Complies
BT1	2 402	12.273	16.877	Complies
	2 440	12.344	17.155	Complies
	2 480	12.037	15.985	Complies


Test mode : 2 Mbps

Antenna	Frequency (MHz)	Maximum peak Conducted Output Power		Result
		(dBm)	(mW)	
BT0	2 402	11.011	12.621	Complies
	2 440	10.102	10.238	Complies
	2 480	9.883	9.734	Complies
BT1	2 402	12.284	16.920	Complies
	2 440	12.307	17.010	Complies
	2 480	12.109	16.252	Complies


See next pages for actual measured spectrum plots.




**BTO, 1 Mbps - Lowest Frequency (2 402 MHz)**

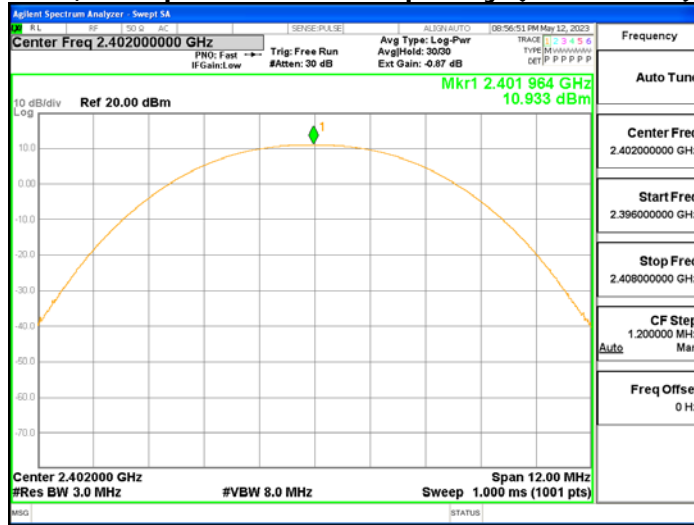


**BTO, 1 Mbps - Middle Frequency (2 440 MHz)**

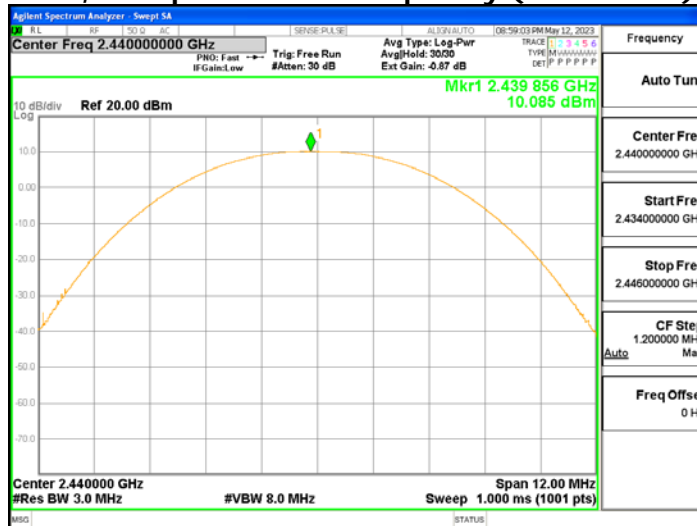


**BTO, 1 Mbps - Highest Frequency (2 480 MHz)**

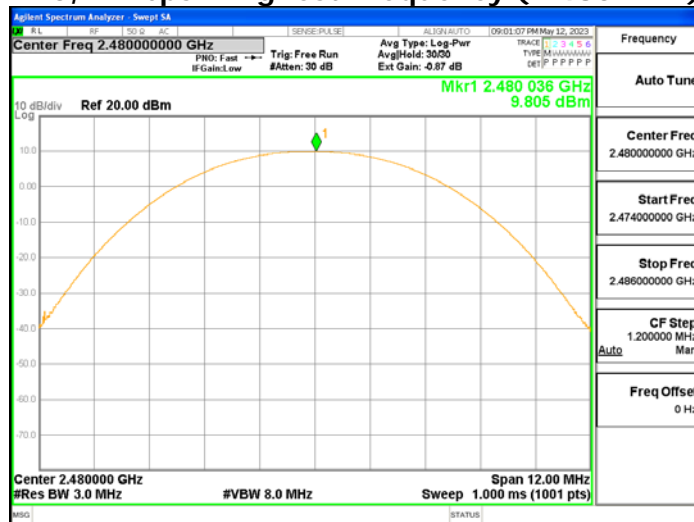


**BT1, 1 Mbps - Lowest Frequency (2 402 MHz)**

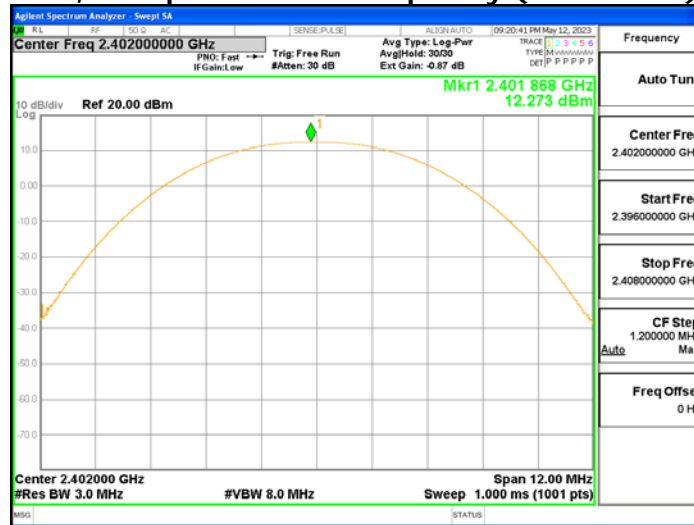


**BT1, 1 Mbps - Middle Frequency (2 440 MHz)**

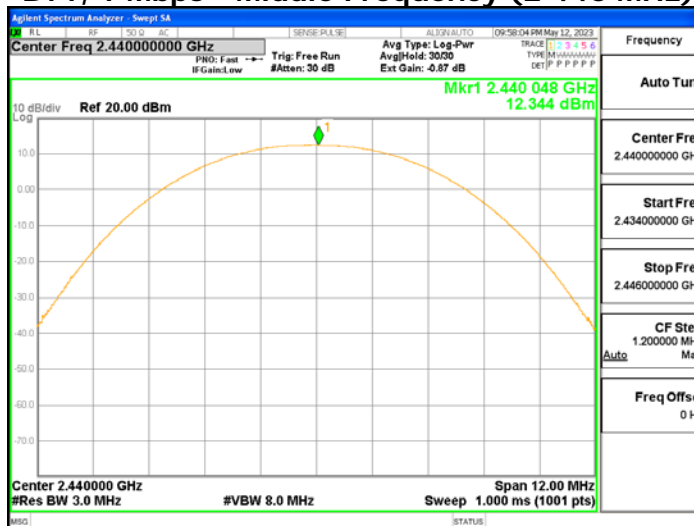


**BT1, 1 Mbps - Highest Frequency (2 480 MHz)**

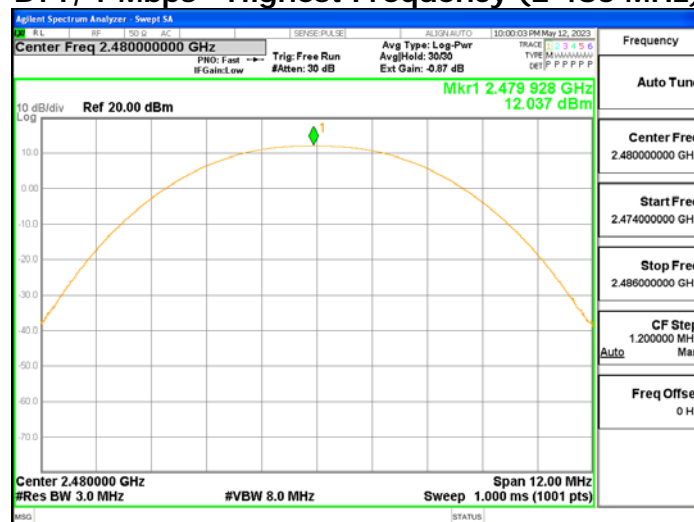


**BT0, 2 Mbps - Lowest Frequency (2 402 MHz)**

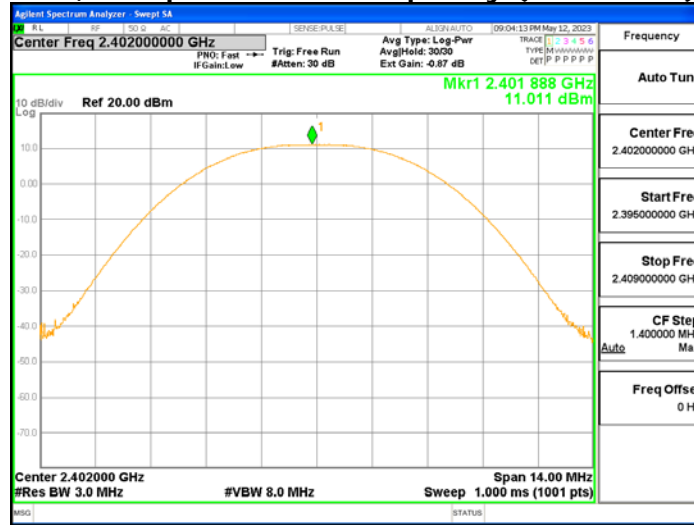


**BT0, 2 Mbps - Middle Frequency (2 440 MHz)**

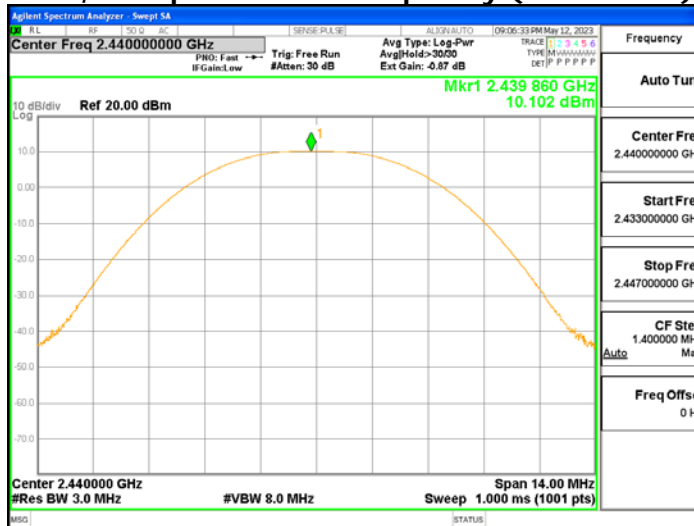


**BT0, 2 Mbps - Highest Frequency (2 480 MHz)**

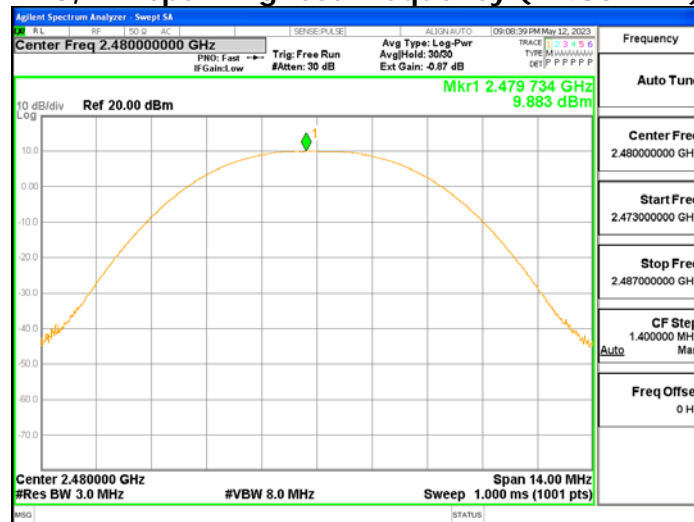


**BT1, 2 Mbps - Lowest Frequency (2 402 MHz)**

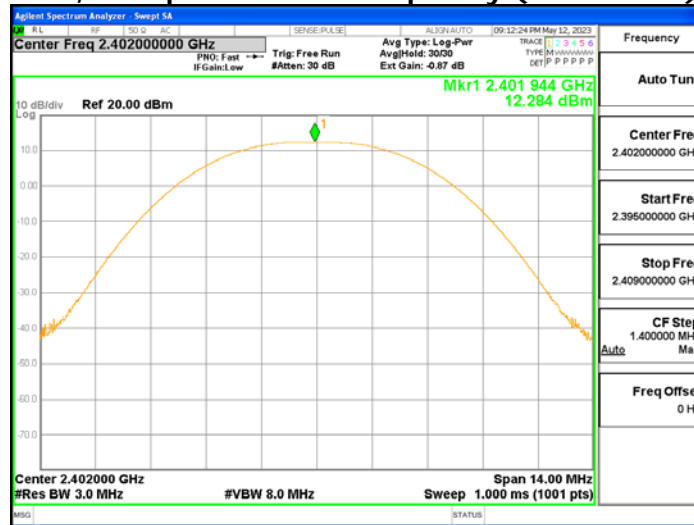

**BT1, 2 Mbps - Middle Frequency (2 440 MHz)**

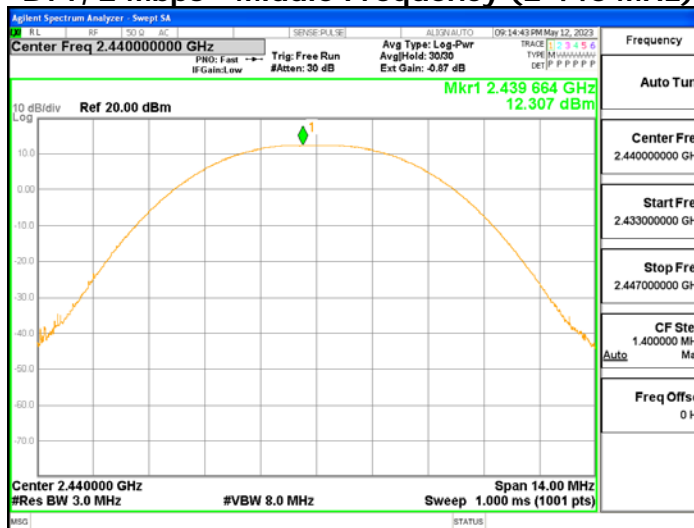

**BT1, 2 Mbps - Highest Frequency (2 480 MHz)**

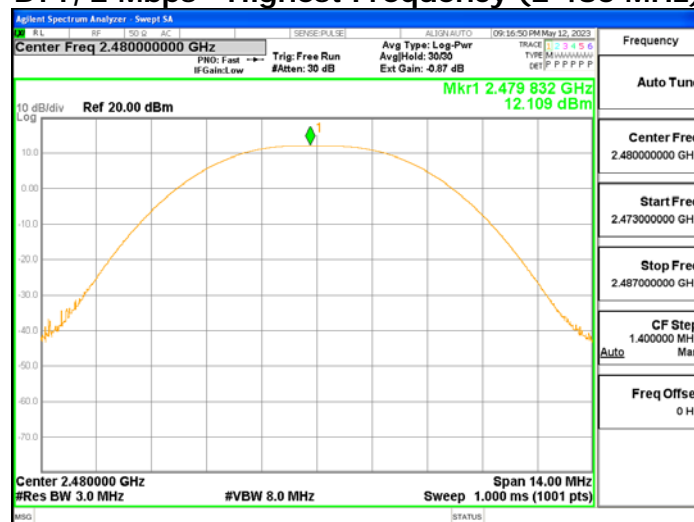



**CTK Co., Ltd.**  
(Ho-dong), 113, Yejik-ro, Cheoin-gu,  
Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2023-01324  
Page (21) / (52) Pages

## 4.3 Transmitter Power Spectral Density

### Test Procedures

KDB 558074 - Section 8.4  
ANSI C63.10-2013 - Section 11.10.2

This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance.

#### Test Settings:

Center frequency = the highest, middle and the lowest channels

- a)  $RBW : 3 \text{ kHz} \leq RBW \leq 100 \text{ kHz}$
- b)  $VBW \geq 3 \times RBW$
- c)  $span \geq 1.5 \times \text{DTS bandwidth}$
- d) Sweep time = auto couple
- e) Detector = peak
- f) Trace mode = max hold
- g) Allow trace to fully stabilize
- h) Use the peak marker function to determine the maximum amplitude level within the RBW.

#### **Limit :**

---

Power Spectral Density < 8dBm @ 3 kHz BW

---



**CTK Co., Ltd.**  
(Ho-dong), 113, Yejik-ro, Cheoin-gu,  
Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2023-01324  
Page (22) / (52) Pages

**Test Data :**

Test mode : 1 Mbps


Antenna	Frequency (MHz)	Power Spectral Density	Result
		(dBm)	
BT0	2 402	-5.195	Complies
	2 440	-6.004	Complies
	2 480	-6.376	Complies
BT1	2 402	-3.870	Complies
	2 440	-4.134	Complies
	2 480	-4.070	Complies

Test mode : 2 Mbps


Antenna	Frequency (MHz)	Power Spectral Density	Result
		(dBm)	
BT0	2 402	-7.692	Complies
	2 440	-8.356	Complies
	2 480	-8.767	Complies
BT1	2 402	-6.520	Complies
	2 440	-6.654	Complies
	2 480	-6.567	Complies

See next pages for actual measured spectrum plots.


**BT0, 1 Mbps - Lowest Frequency (2 402 MHz)**

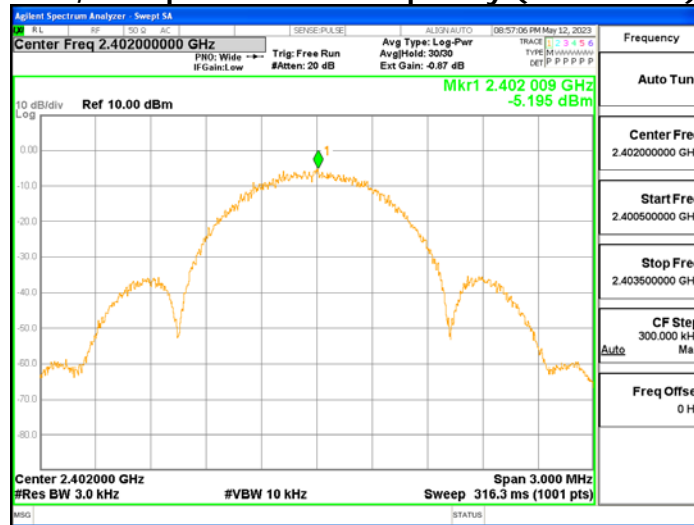


**BT0, 1 Mbps - Middle Frequency (2 440 MHz)**

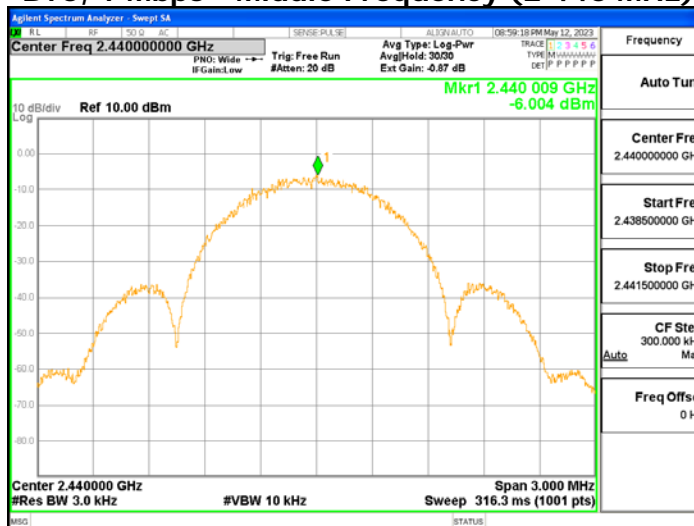


**BT0, 1 Mbps - Highest Frequency (2 480 MHz)**

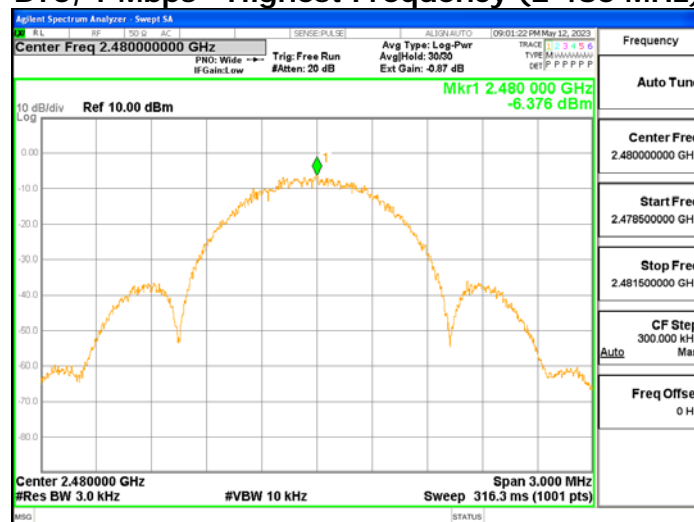


**BT1, 1 Mbps - Lowest Frequency (2 402 MHz)**

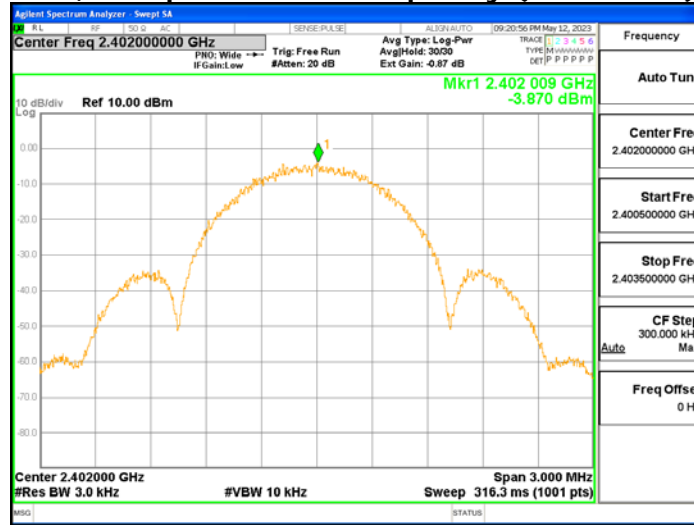

**BT1, 1 Mbps - Middle Frequency (2 440 MHz)**

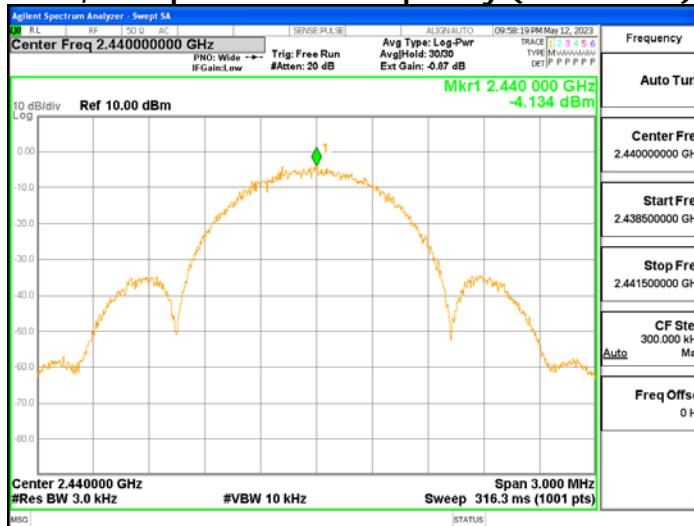

**BT1, 1 Mbps - Highest Frequency (2 480 MHz)**

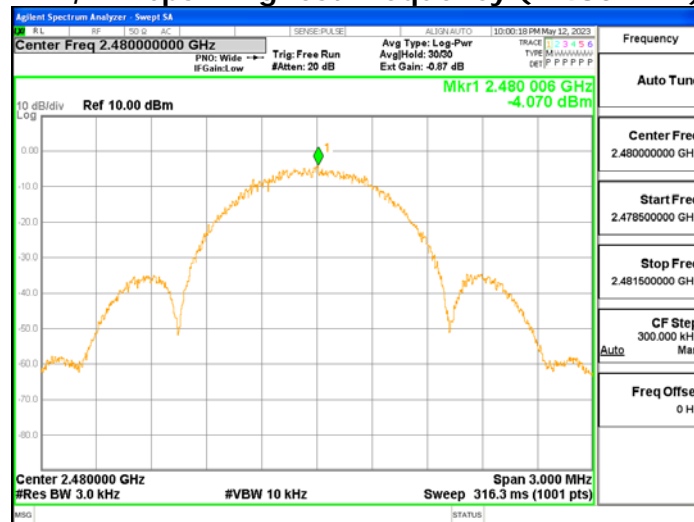







**CTK Co., Ltd.**  
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,  
 Yongin-si, Gyeonggi-do, Korea  
 Tel: +82-31-339-9970  
 Fax: +82-31-624-9501

Report No.:  
 CTK-2023-01324  
 Page (25) / (52) Pages


**BT0, 2 Mbps - Lowest Frequency (2 402 MHz)**

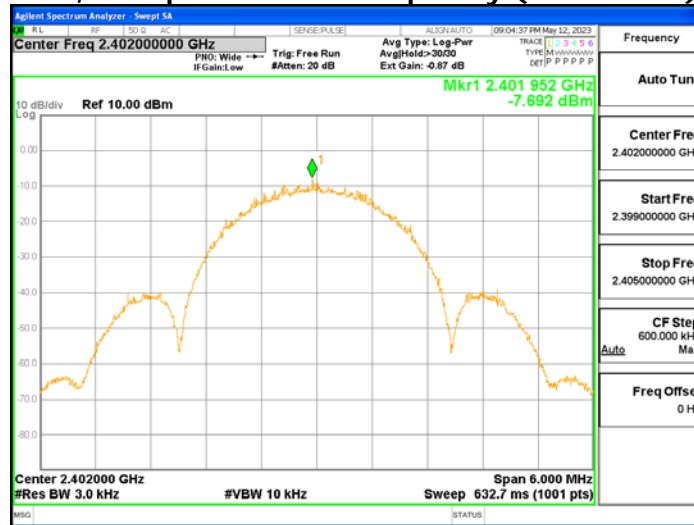


**BT0, 2 Mbps - Middle Frequency (2 440 MHz)**

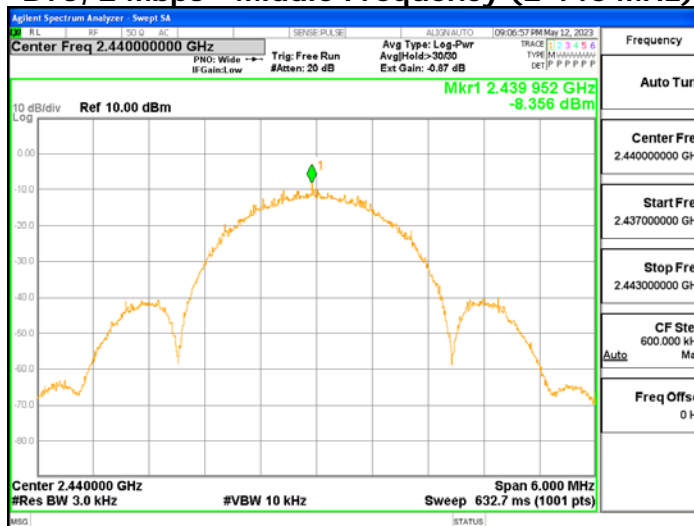


**BT0, 2 Mbps - Highest Frequency (2 480 MHz)**

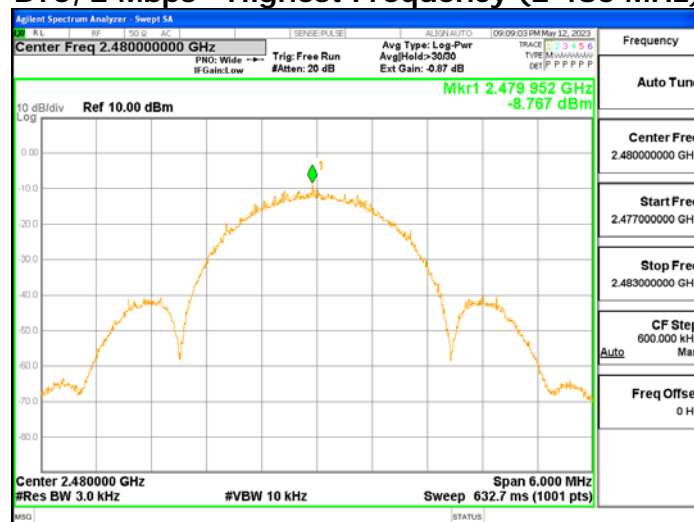


**BT1, 2 Mbps - Lowest Frequency (2 402 MHz)**

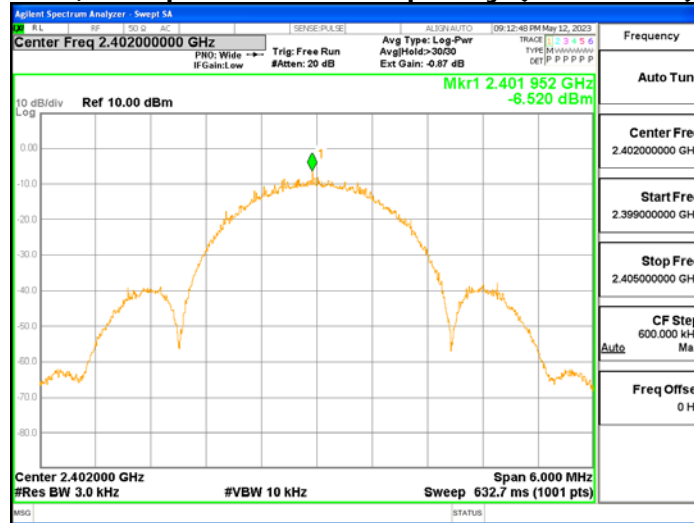

**BT1, 2 Mbps - Middle Frequency (2 440 MHz)**

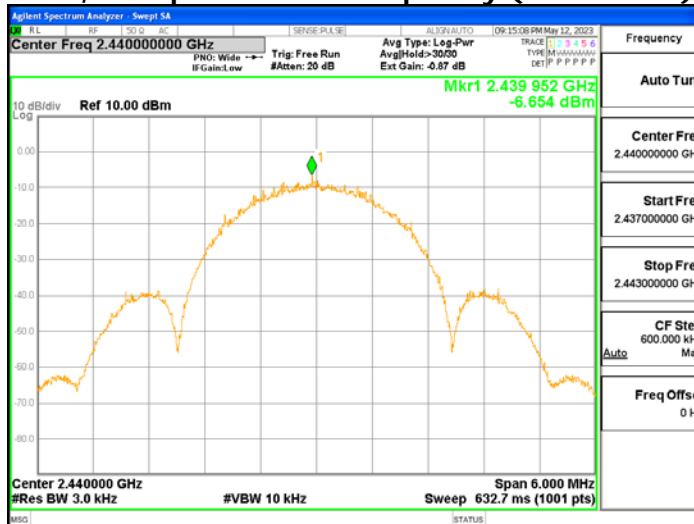

**BT1, 2 Mbps - Highest Frequency (2 480 MHz)**

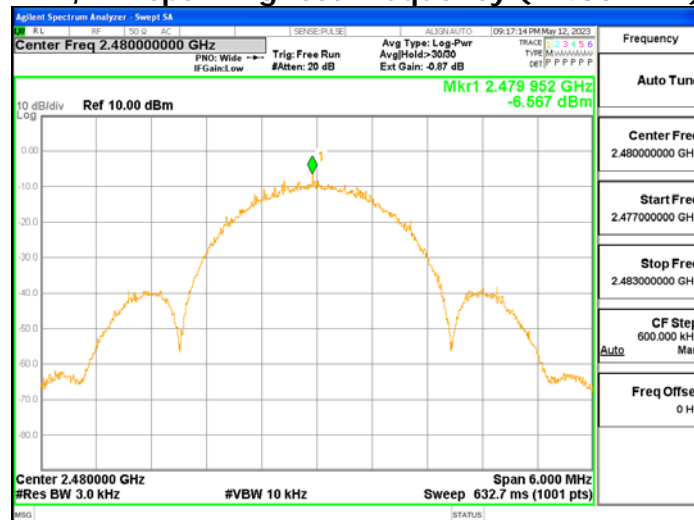



## 4.4 Conducted Spurious emission

### Test Procedures

KDB 558074 - Section 8.5  
ANSI C63.10-2013 - Section 11.11.3

The Unwanted emission from the EUT were measured according to the dictates PKPSD measurement procedure in section 11.11 of ANSI C63.10-2013.

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section 5.4(4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

#### Test Settings:

Center frequency = the highest, middle and the lowest channels

- a) RBW = 100 kHz
- b) VBW  $\geq 3 \times$  RBW
- c) Detector = peak
- d) Sweep time = auto couple
- e) Trace mode = max hold
- f) Allow trace to fully stabilize
- g) Use the peak marker function to determine the maximum amplitude level.

#### **Limit :**

---

---

Emission level < 20 dBc

---

---

#### **Test results: Complies**

- All conducted emission in any 100kHz bandwidth outside of the spread spectrum band was at least 20dB lower than the highest in-band spectral density. Therefore the applying equipment meets the requirement.

See next pages for actual measured spectrum plots.






**CTK Co., Ltd.**  
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,  
 Yongin-si, Gyeonggi-do, Korea  
 Tel: +82-31-339-9970  
 Fax: +82-31-624-9501

Report No.:  
 CTK-2023-01324  
 Page (28) / (52) Pages

## Spurious Emission

Test Mode : BT0, 1 Mbps



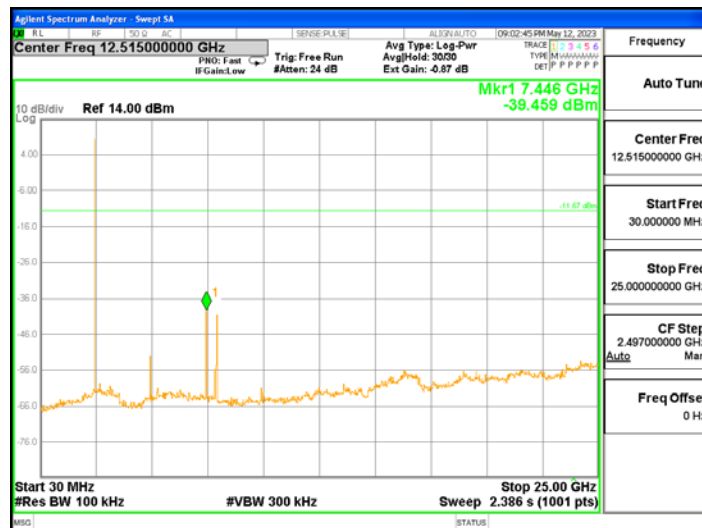
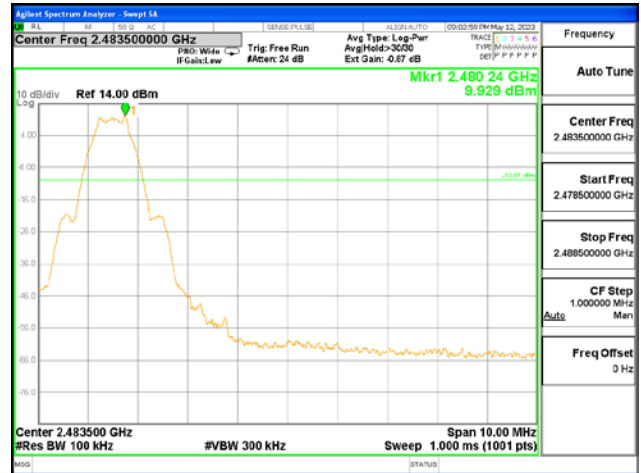
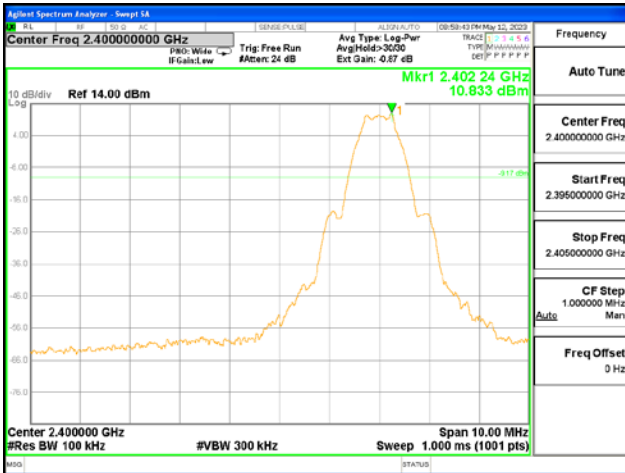







**CTK Co., Ltd.**  
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,  
 Yongin-si, Gyeonggi-do, Korea  
 Tel: +82-31-339-9970  
 Fax: +82-31-624-9501

Report No.:  
 CTK-2023-01324  
 Page (29) / (52) Pages

**Test Mode : BT1, 1 Mbps**

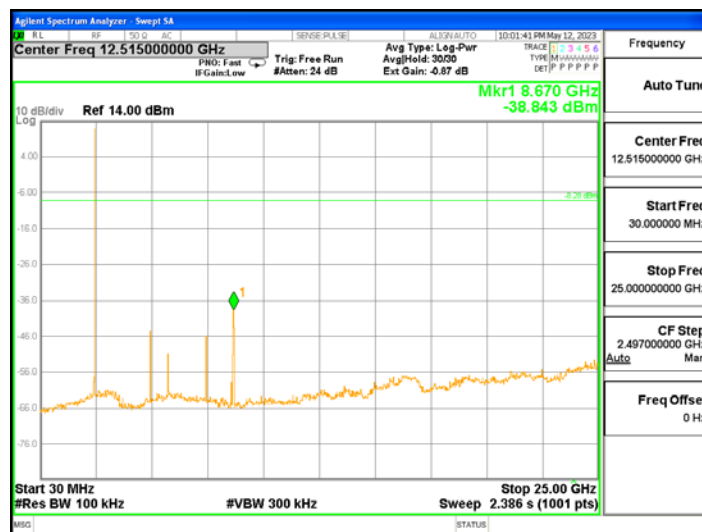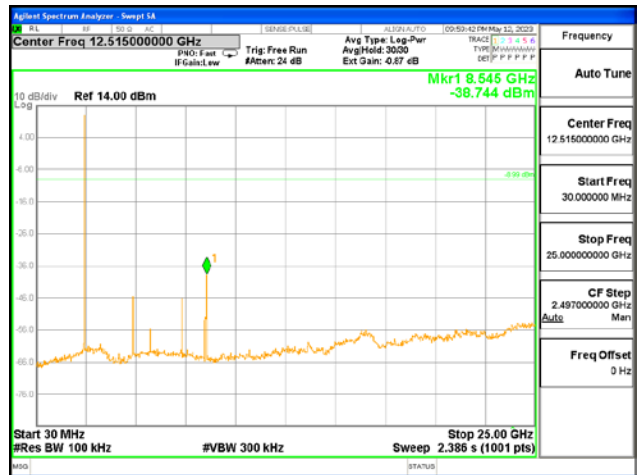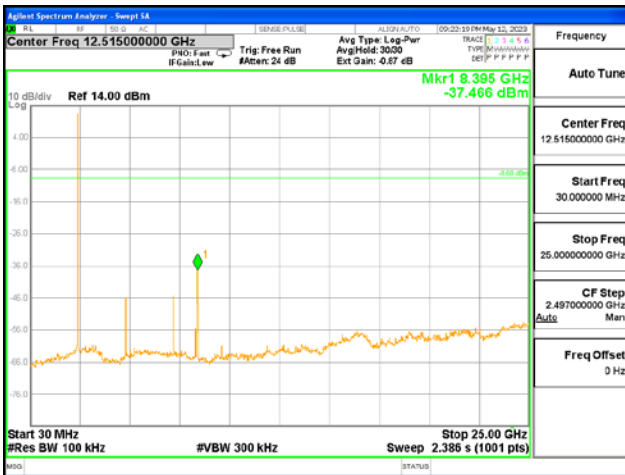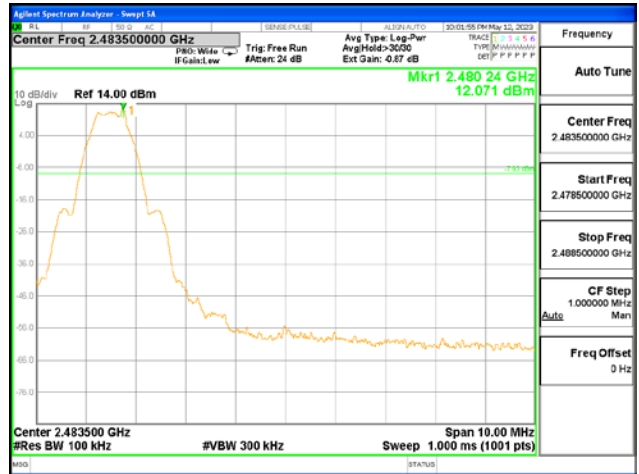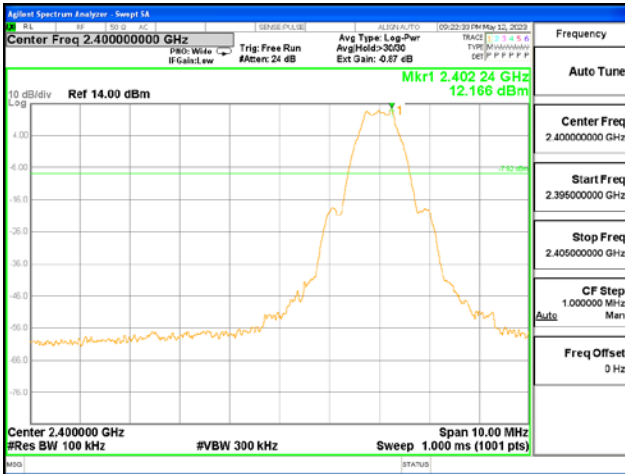

**Test Mode : BTO, 2 Mbps**



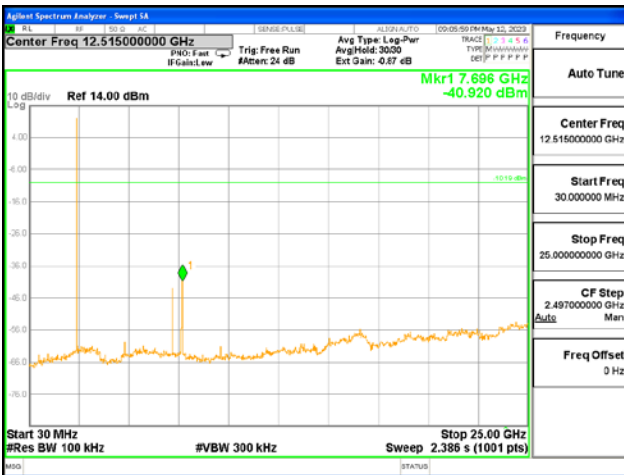
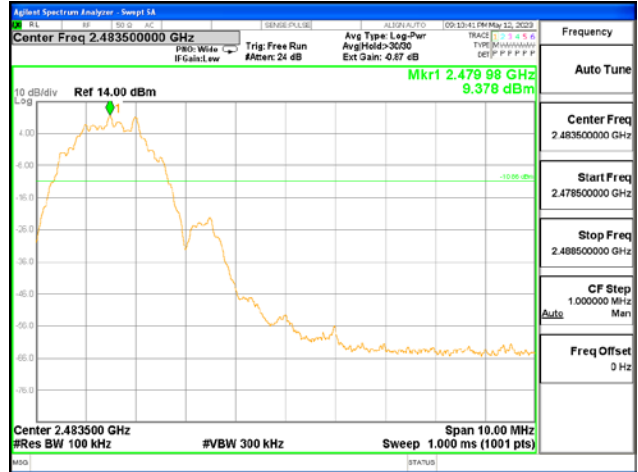
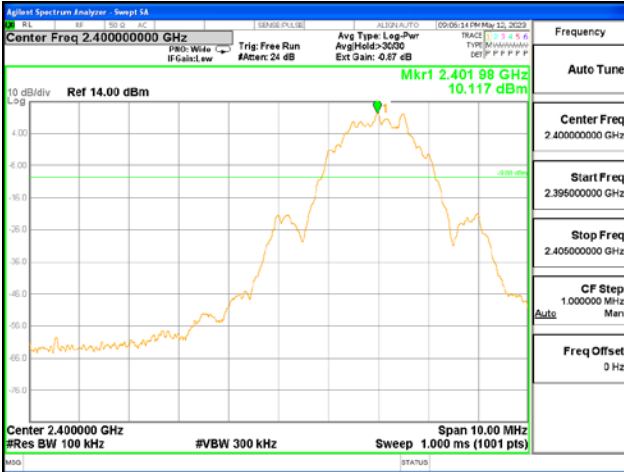




**CTK Co., Ltd.**  
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,  
 Yongin-si, Gyeonggi-do, Korea  
 Tel: +82-31-339-9970  
 Fax: +82-31-624-9501

Report No.:  
 CTK-2023-01324  
 Page (31) / (52) Pages

**Test Mode : BT1, 2 Mbps**

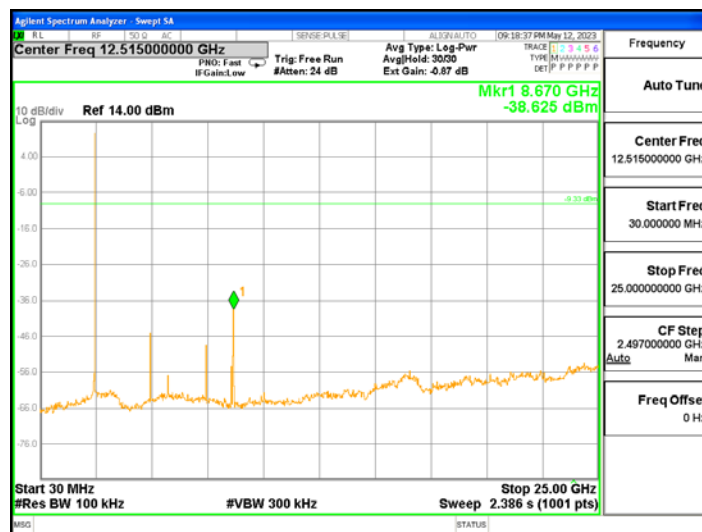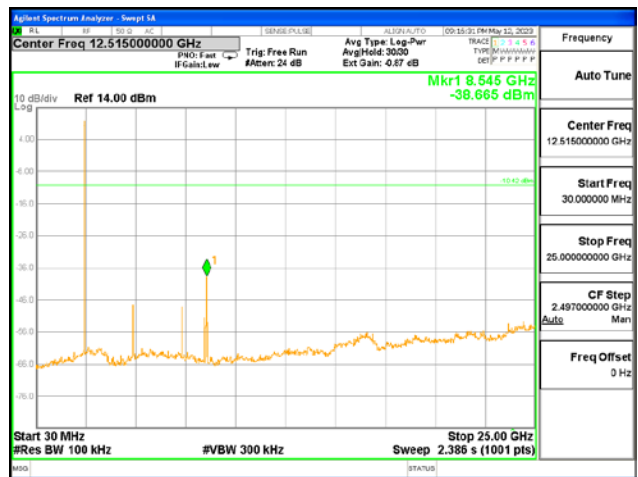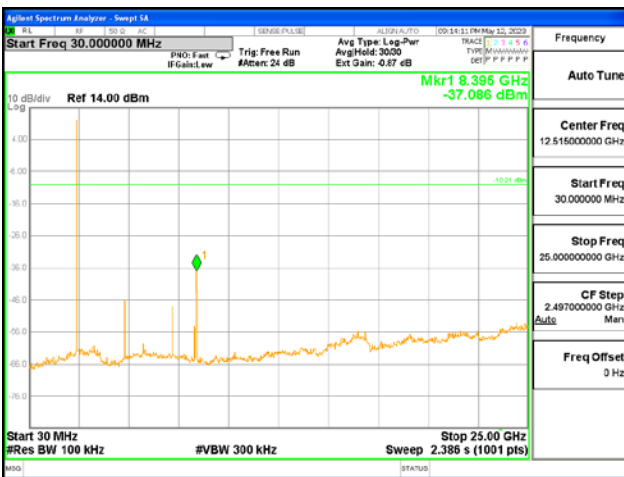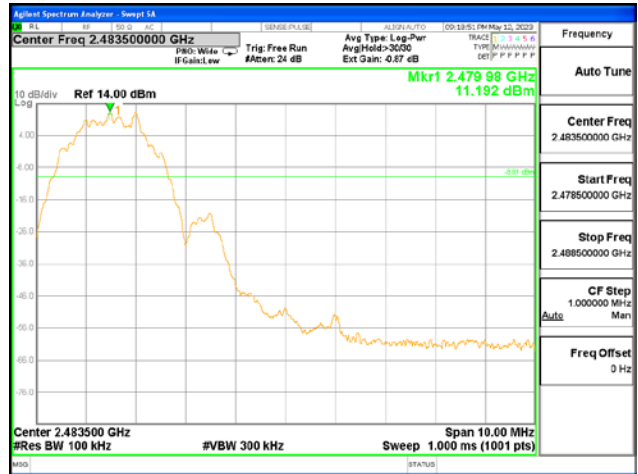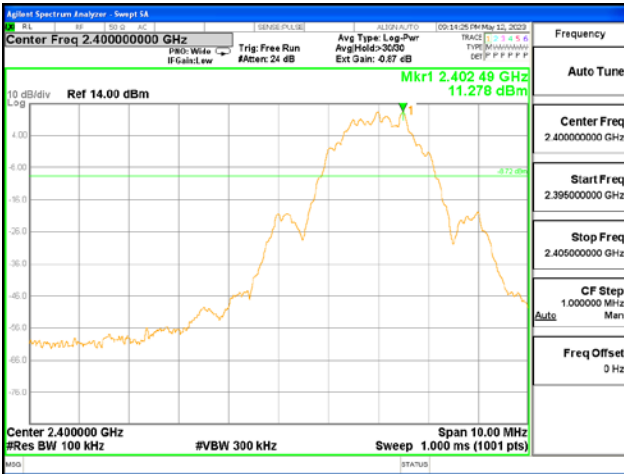



## 4.5 Radiated Emission

### Test Location

- 10 m SAC (test distance :  10 m,  3 m)  
 3 m SAC (test distance : 3 m)

### Test Procedures

KDB 558074 - Section 8.5, 8.6  
ANSI C63.10-2013 - Section 11.11, 11.12

- 1) In the frequency range of 9 kHz to 30 MHz, magnetic field is measured with Loop Antenna. The Test Antenna is positioned with its plane vertical at 1m distance from the EUT. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.
- 2) In the frequency range above 30 MHz, Bi-Log Test Antenna(30 MHz to 1 GHz) and Horn Test Antenna(above 1 GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is carried from 1m to 4m above the ground to determine the maximum value of the field strength. The emissions levels at both horizontal and vertical polarizations should be tested.

### Test Settings:

Frequency Range = 9 kHz ~ 1 GHz

- a) RBW = 100 kHz for  $f < 1$  GHz, 9 kHz for  $f < 30$  MHz  
b) VBW  $\geq$  RBW  
c) Detector = CISPR Quasi-peak  
d) Sweep time = auto couple

- Peak

Frequency Range = 1 GHz ~ 25 GHz (2.4 GHz 10<sup>th</sup> harmonic)

- a) RBW = 1 MHz  
b) VBW  $\geq 3 \times$  RBW  
c) Detector = Peak  
d) Sweep time = auto  
e) Trace mode = max hold

- Average (duty cycle  $\geq 98\%$ )

Frequency Range = 1 GHz ~ 25 GHz (2.4 GHz 10<sup>th</sup> harmonic)

- a) RBW = 1 MHz  
b) VBW  $\geq 3 \times$  RBW  
c) Detector = RMS  
d) Sweep time = auto  
e) Averaging type = power (i.e., RMS)  
f) Trace mode = average (at least 100 traces)





- Average (duty cycle < 98%, duty cycle variations are less than ±2%)

Frequency Range = 1 GHz ~ 25 GHz (2.4 GHz 10<sup>th</sup> harmonic)

a) RBW = 1 MHz

b) VBW ≥ 3 x RBW

c) Detector = RMS

d) Sweep time = auto

e) Averaging type = power (i.e., RMS)

f) Trace mode = average (at least 100 traces)

A correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 % duty cycle.

If power averaging (RMS) mode, then the applicable correction factor is  $10 \log(1/x)$ , where x is the duty cycle.

Test Mode	Duty Cycle Factor	
	BT0	BT1
1 Mbps	0.7 dB	0.7 dB
2 Mbps	2.4 dB	2.4 dB

**Limit :**

FCC Part 15 § 15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	MHz	MHz	GHz
0.09-0.11	8.37626-8.38675	73-74.6	399.9-410	2690-2900	10.6-12.7
<sup>1</sup> 0.495-0.505	8.41425-8.41475	74.8-75.2	608-614	3260-3267	13.25-13.4
2.1735-2.1905	12.29-12.293	108-121.94	960-1240	3332-3339	14.47-14.5
4.125-4.128	12.51975-12.52025	123-138	1300-1427	3345.8-3358	15.35-16.2
4.17725-4.17775	12.57675-12.57725	149.9-150.05	1435-1626.5	3600-4400	17.7-21.4
4.20725-4.20775	13.36-13.41	156.52475-156.52525	1645.5-1646.5	4500-5150	22.01-23.12
6.215-6.218	16.42-16.423	156.7-156.9	1660-1710	5350-5460	23.6-24
6.26775-6.26825	16.69475-16.69525	162.0125-167.17	1718.8-1722.2	7250-7750	31.2-31.8
6.31175-6.31225	16.80425-16.80475	167.72-173.2	2200-2300	8025-8500	36.43-36.5
8.291-8.294	25.5-25.67	240-285	2310-2390	9000-9200	<sup>2</sup> Above 38.6
8.362-8.366	37.5-38.25	322-335.4	2483.5-2500	9300-9500	

<sup>1</sup> Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

<sup>2</sup> Above 38.6

§ 15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

FCC Part 15 § 15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table :

Except when the requirements applicable to a given device state otherwise, emissions from licence-exempt transmitters shall comply with the field strength limits shown in Table 2. Additionally, the level of any transmitter emission shall not exceed the level of the transmitter's fundamental emission.

**Table 2. General Field Strength Limits for Licence-Exempt Transmitters**

Frequency(MHz)	Field Strength uV/m@3m	Field Strength dBuV/m@3m	Measurement Distance (meters)
0.009-0.490	2400/F(kHz)	-	300
0.490-1.705	24000/F(kHz)	-	30
1.705-30	30	-	30
30-88	100**	40	3
88-216	150**	43.5	3
216-960	200**	46	3
Above 960	500	54	3


\*\* Except as provided in 15.209(g).fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72MHz, 76-88MHz, 174-216MHz, 470-806MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g.15.231 and 15.241.

Note :


- 1) For above 1 GHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit.
- 2) For above 1 GHz, limit field strength of harmonics : 54 dBuV/m@3m (AV) and 74 dBuV/m@3m (PK)

**Test Setup:**


- 1) For field strength of emissions from 9 kHz to 30 MHz

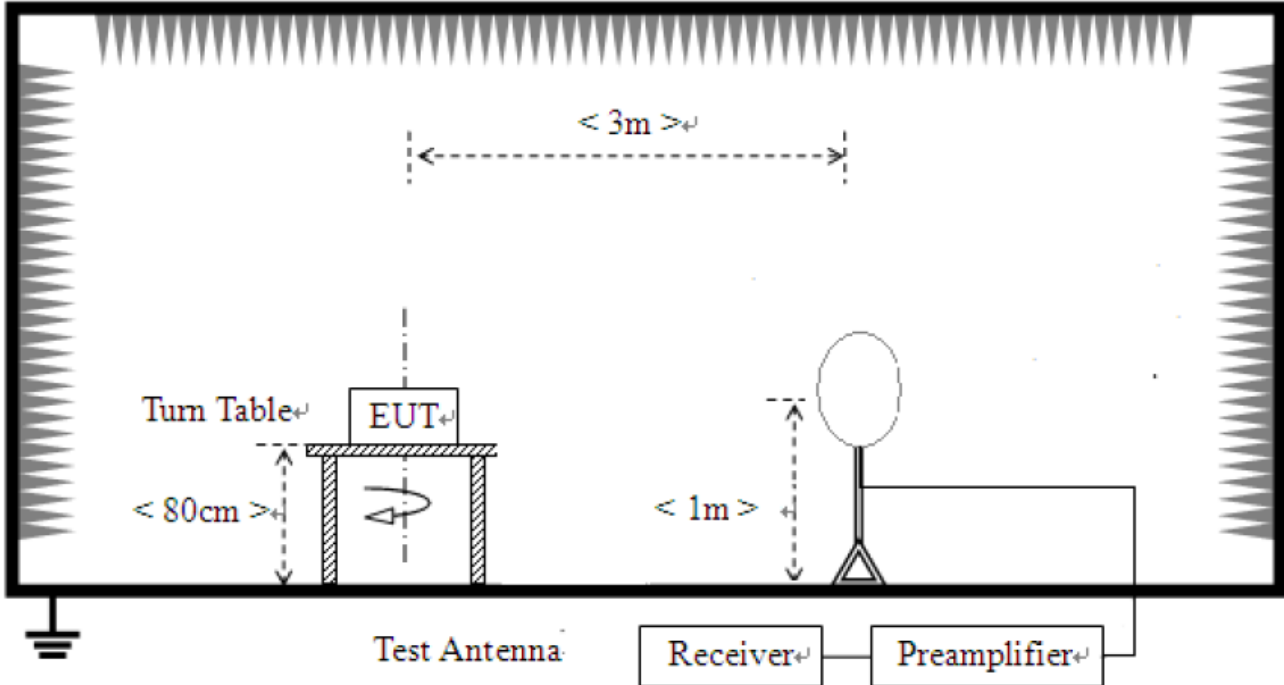

- 2) For field strength of emissions from 30 MHz to 1 GHz

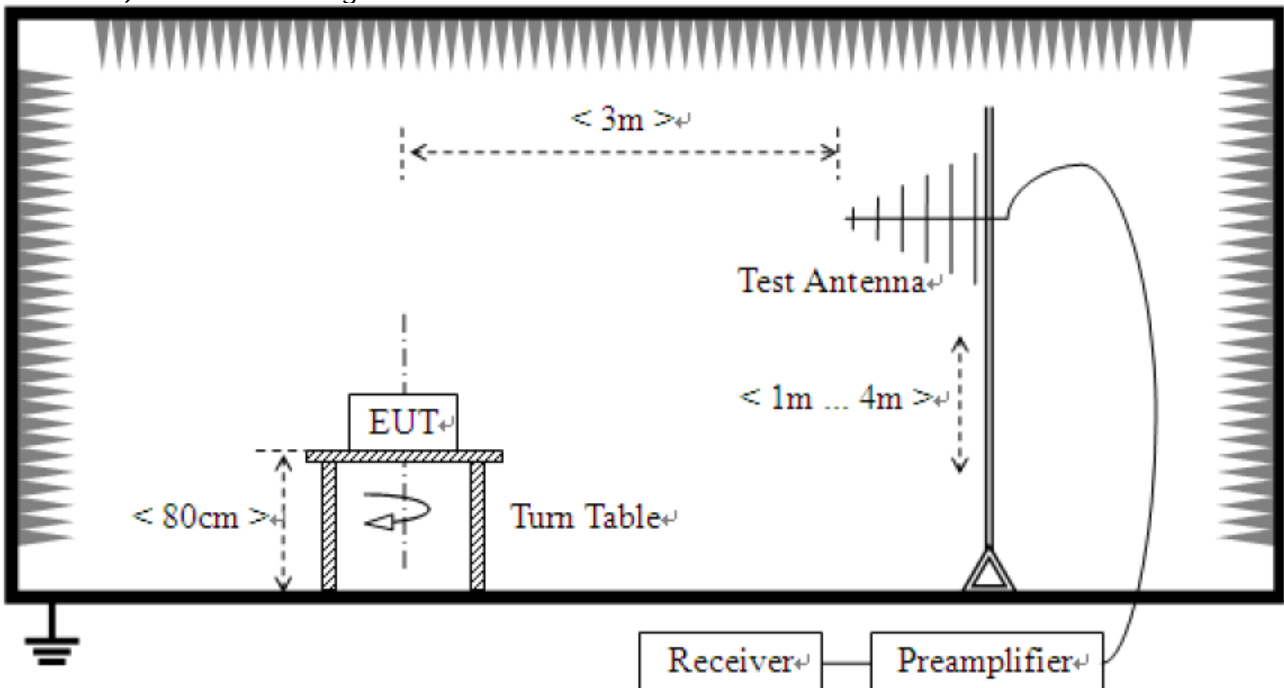

3) For field strength of emissions above 1 GHz

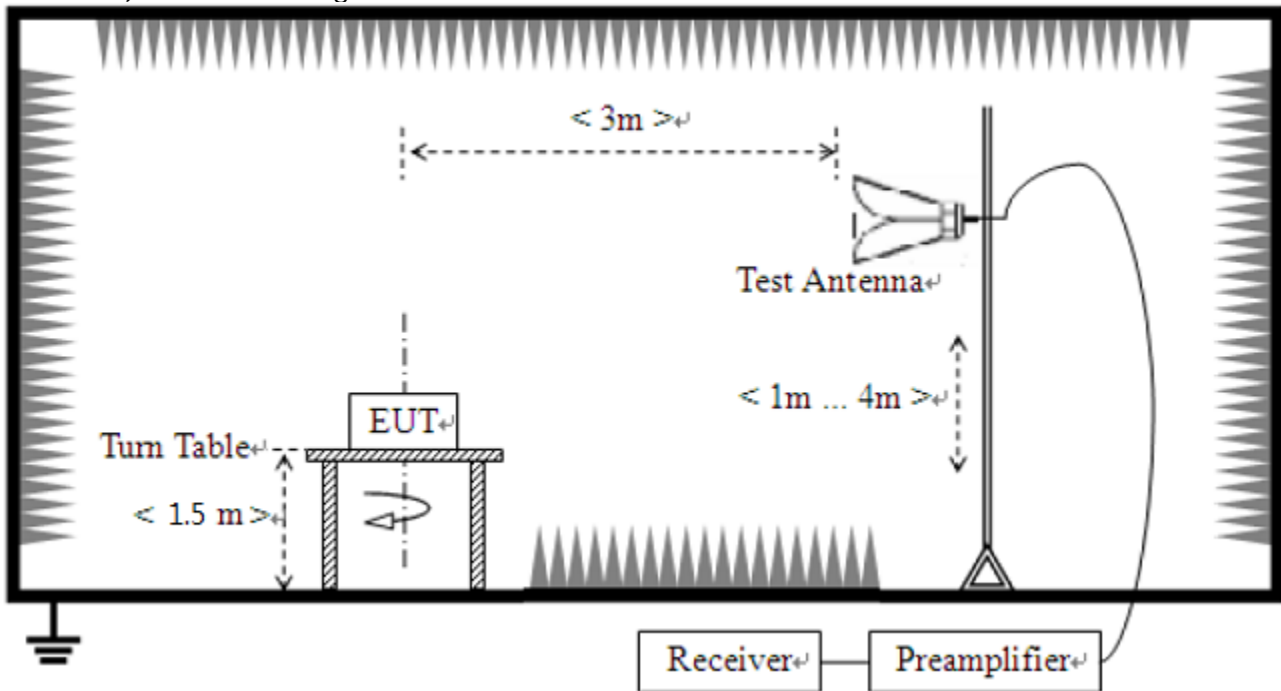

## Test results


### 1) 9 kHz to 30 MHz

Test mode : BTO\_Transmitter (Worst Case)

The requirements are:

Complies

### Test Data

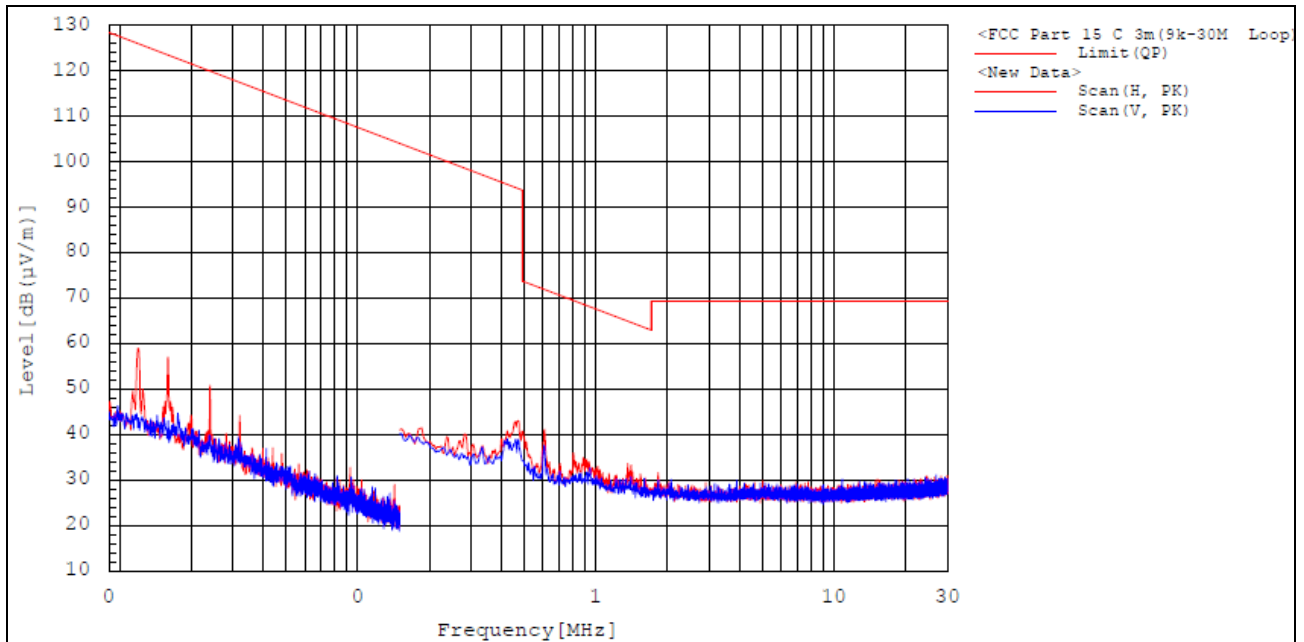

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Level [dB(uV/m)]	Limit [dB(uV/m)]	Margin [dB]
-----------------	-----	----------------	---------------	------------------	------------------	-------------

The emissions 9 kHz to 30 MHz were 20 dB lower than the limit.

### Remark :


1. The unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in lie-down position(X axis) and the worst case was recorded.
2. Result = Reading + c.f(Correction factor)
3. Correction factor = Antenna factor + Cable loss + 6 dB attenuator - Amp Gain
4. This data is the Peak(PK) value.

**Test mode : BT1\_Transmitter (Worst Case)**

The requirements are:

Complies

**Test Data**

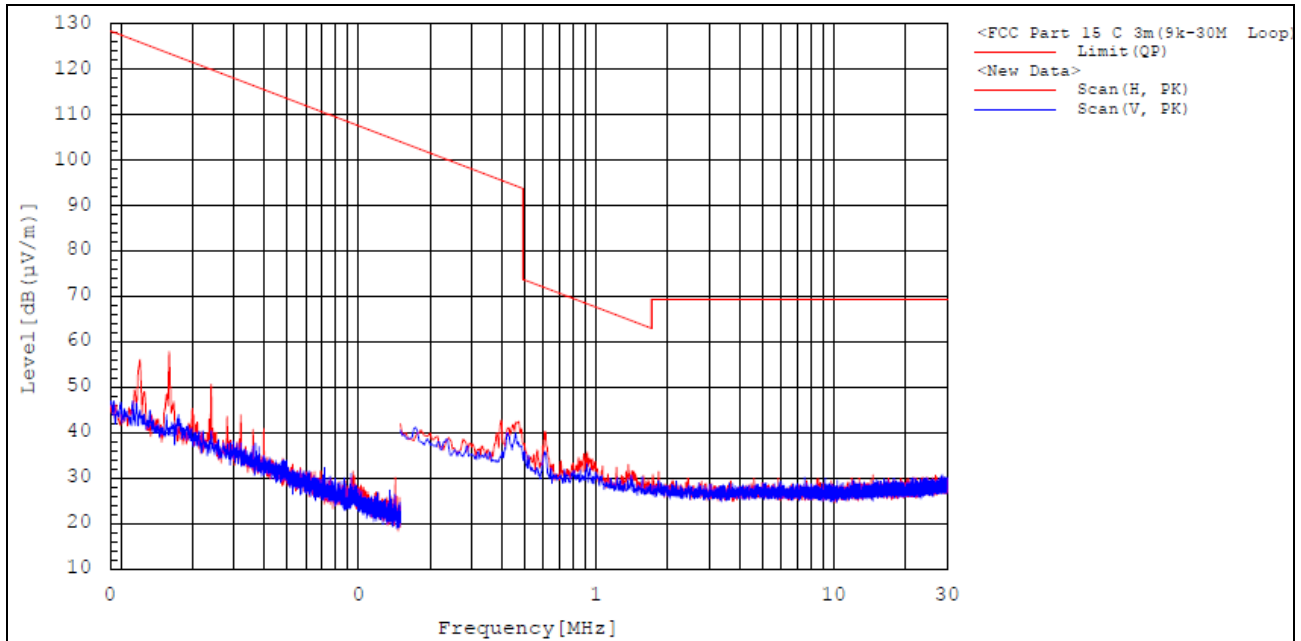

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Level [dB(uV/m)]	Limit [dB(uV/m)]	Margin [dB]
-----------------	-----	----------------	---------------	------------------	------------------	-------------

The emissions 9 kHz to 30 MHz were 20 dB lower than the limit.

**Remark :**

1. The unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in lie-down position(X axis) and the worst case was recorded.
2. Result = Reading + c.f(Correction factor)
3. Correction factor = Antenna factor + Cable loss + 6 dB attenuator - Amp Gain
4. This data is the Peak(PK) value.


## 2) 30 MHz to 1 GHz

Test mode : BTO\_Transmitter (Worst Case)

The requirements are:

Complies

### Test Data

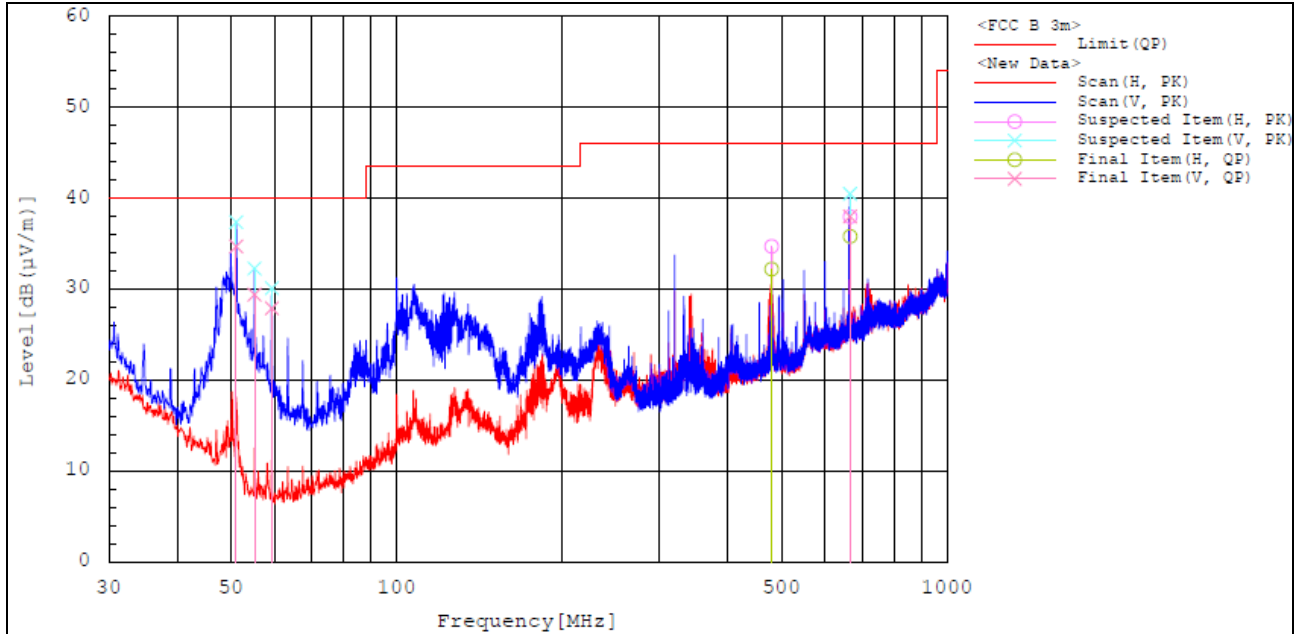

### Final Result

No.	Frequency [MHz]	Pol	Reading QP [dB (µV)]	c.f [dB (1/m)]	Result QP [dB (µV/m)]	Limit QP [dB (µV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]
1	51.146	V	52.3	-17.6	34.7	40.0	5.3	99.9	355.8
2	55.220	V	48.6	-19.2	29.4	40.0	10.6	99.9	122.5
3	59.391	V	47.4	-19.5	27.9	40.0	12.1	99.9	211.2
4	479.983	H	36.9	-4.7	32.2	46.0	13.8	200.0	357.0
5	666.223	V	38.7	-0.7	38.0	46.0	8.0	99.9	156.5
6	666.514	H	36.5	-0.7	35.8	46.0	10.2	200.0	232.5

### Remark :


1. The unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in lie-down position(X axis) and the worst case was recorded.
2. Result = Reading + c.f(Correction factor)
3. Correction factor = Antenna factor + Cable loss + 6 dB attenuator - Amp Gain

**Test mode : BT1\_Transmitter (Worst Case)**

The requirements are:

Complies

**Test Data**

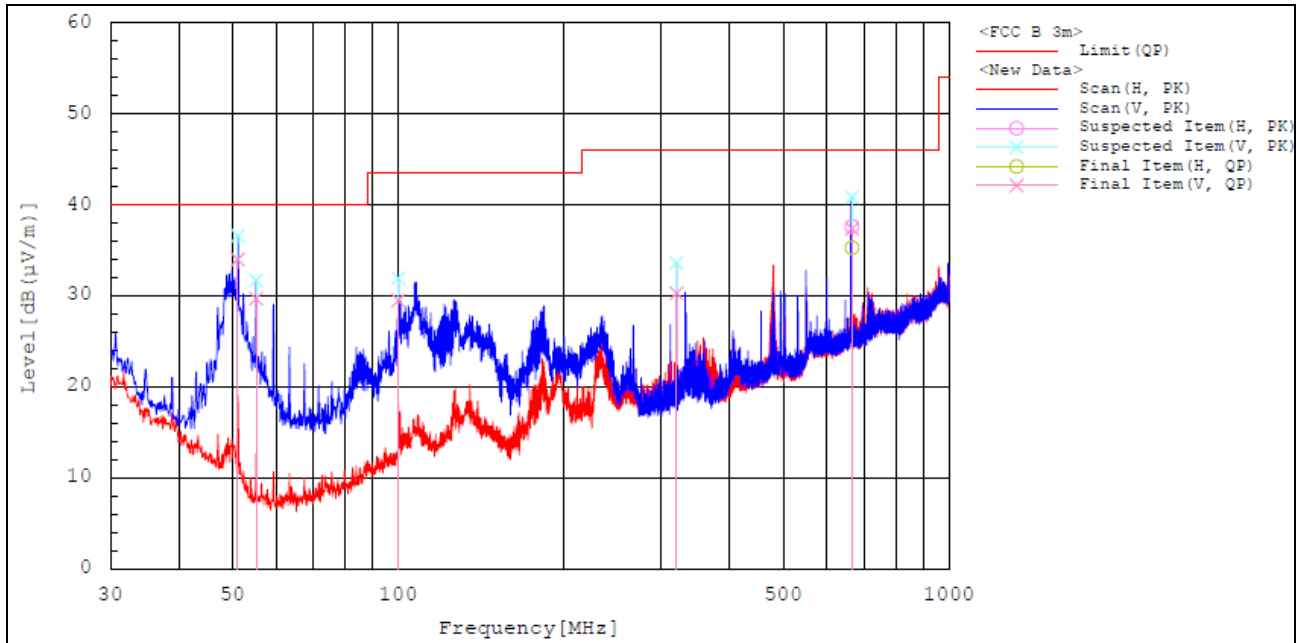

**Final Result**

No.	Frequency [MHz]	Pol	Reading QP [dB (µV)]	c.f [dB (1/m)]	Result QP [dB (µV/m)]	Limit QP [dB (µV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]
1	51.146	V	51.6	-17.6	34.0	40.0	6.0	100.1	359.0
2	55.220	V	48.9	-19.2	29.7	40.0	10.3	100.1	359.0
3	100.034	V	44.5	-15.0	29.5	43.5	14.0	100.1	4.6
4	320.030	V	40.0	-9.7	30.3	46.0	15.7	199.9	284.9
5	666.514	H	36.0	-0.7	35.3	46.0	10.7	99.9	268.4
6	666.611	V	38.1	-0.7	37.4	46.0	8.6	100.1	210.0

**Remark :**

1. The unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in lie-down position(X axis) and the worst case was recorded.
2. Result = Reading + c.f(Correction factor)
3. Correction factor = Antenna factor + Cable loss + 6 dB attenuator - Amp Gain




### 3) above 1 GHz

The requirements are:

Complies



#### Test Data

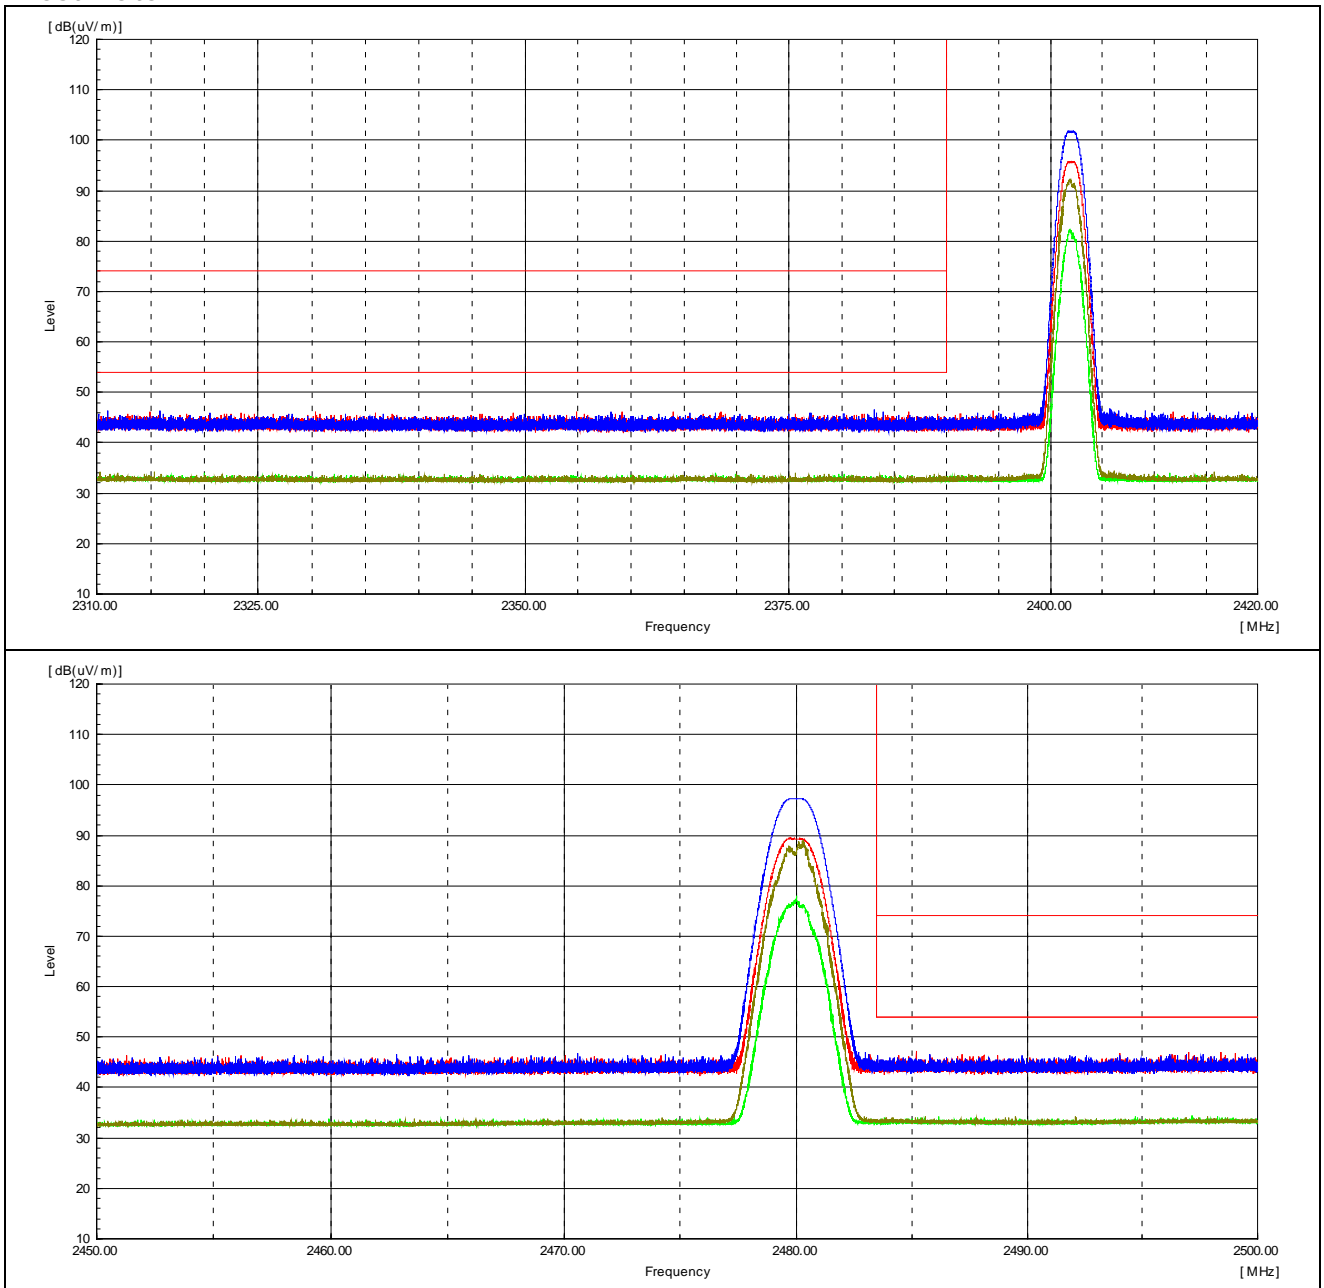



**CTK Co., Ltd.**  
(Ho-dong), 113, Yejik-ro, Cheoin-gu,  
Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2023-01324  
Page (42) / (52) Pages

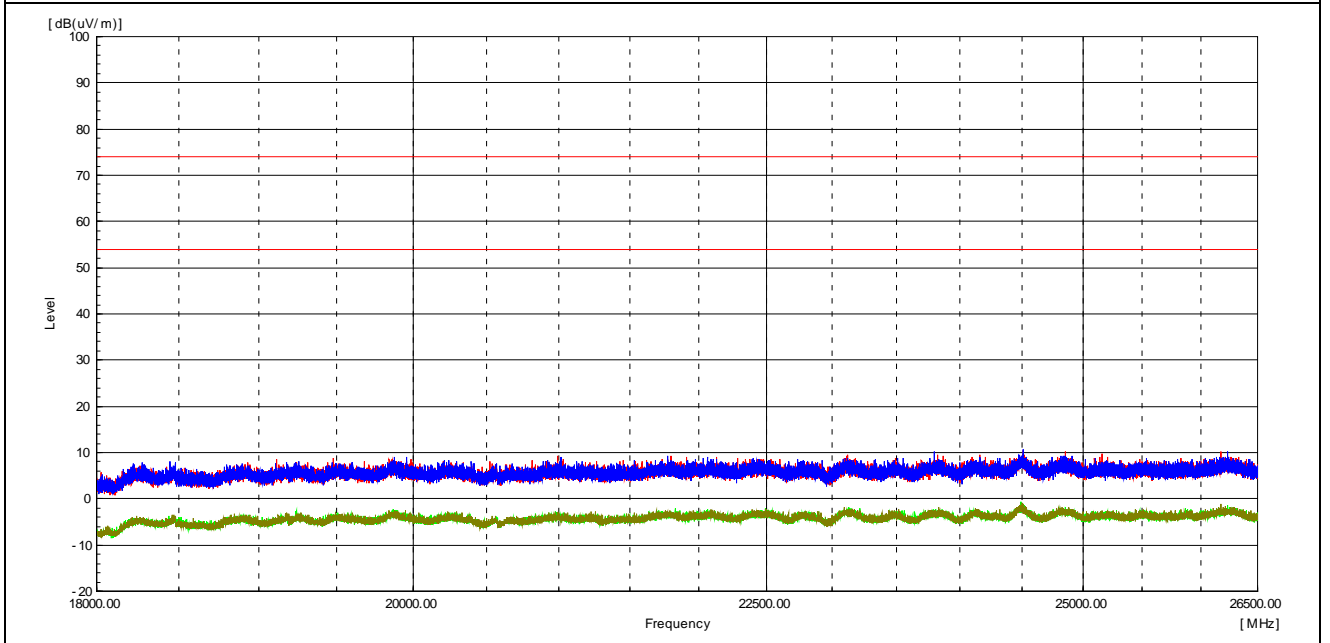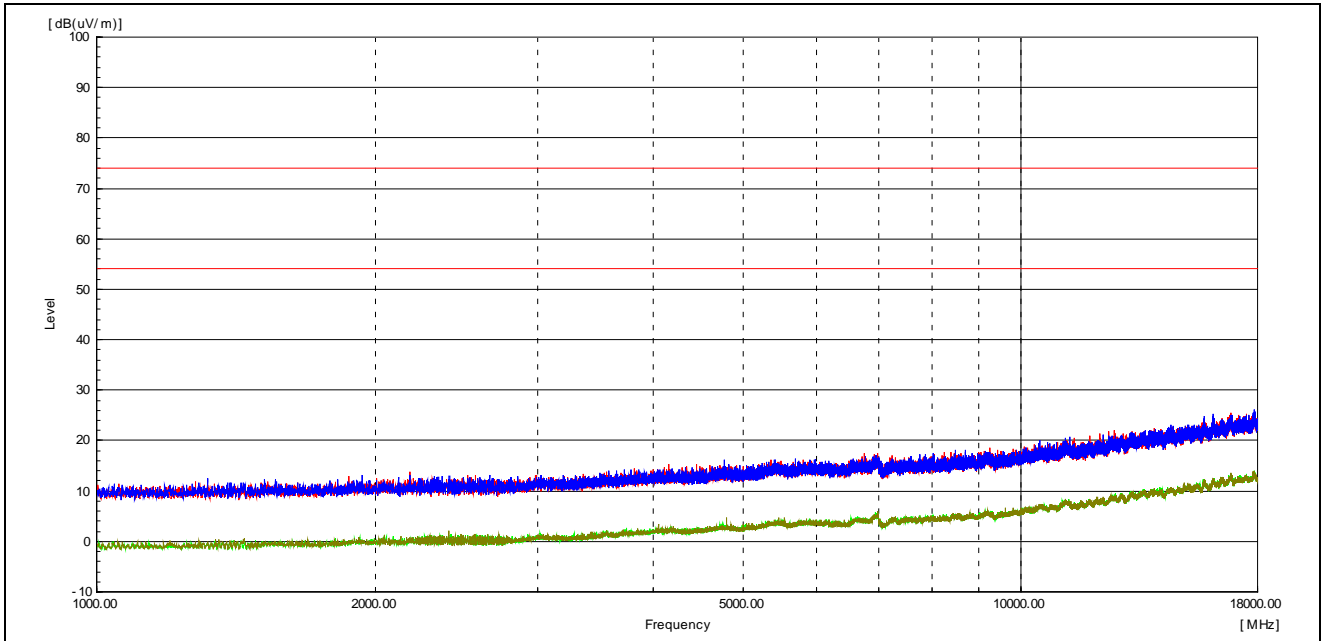

**Test mode : Transmitter (BT0, 1 Mbps)**

Lowest channel (2 402 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
7 205.47	H	48.0	7.9	-----	55.9	-----	74.0	-----	18.1	-----	Peak
7 205.27	H	34.9	7.9	0.7	-----	43.5	-----	54.0	-----	10.5	Average
7 205.29	V	47.0	7.9	-----	54.9	-----	74.0	-----	19.1	-----	Peak
7 205.90	V	33.1	7.9	0.7	-----	41.7	-----	54.0	-----	12.3	Average

Middle channel (2 440 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
7 320.80	H	45.6	8.1	-----	53.7	-----	74.0	-----	20.3	-----	Peak
7 320.44	H	33.4	8.1	0.7	-----	42.2	-----	54.0	-----	11.8	Average
7 319.89	V	44.5	8.1	-----	52.6	-----	74.0	-----	21.4	-----	Peak
7 321.44	V	32.9	8.1	0.7	-----	41.7	-----	54.0	-----	12.3	Average

Highest channel (2 480 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
4 958.03	H	43.5	2.5	-----	46.0	-----	74.0	-----	28.0	-----	Peak
4 960.31	H	31.7	2.6	0.7	-----	35.0	-----	54.0	-----	19.0	Average
4 960.56	V	43.9	2.6	-----	46.5	-----	74.0	-----	27.5	-----	Peak
4 960.38	V	32.8	2.6	0.7	-----	36.1	-----	54.0	-----	17.9	Average
7 439.79	H	44.6	8.1	-----	52.7	-----	74.0	-----	21.3	-----	Peak
7 440.20	H	34.0	8.1	0.7	-----	42.8	-----	54.0	-----	11.2	Average
7 439.31	V	46.5	8.1	-----	54.6	-----	74.0	-----	19.4	-----	Peak
7 440.30	V	32.8	8.1	0.7	-----	41.6	-----	54.0	-----	12.4	Average

**Remarks**

1. The unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in lie-down position(X axis) and the worst case was recorded.
2. Peak Result = Reading + c.f(Correction factor)  
Average Result = Reading + c.f(Correction factor) + Duty Cycle Factor
3. Correction factor = Antenna factor + Cable loss - Amp Gain



**Test mode : Transmitter (BT1, 1 Mbps)**

Lowest channel (2 402 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
4 803.49	H	44.8	2.2	-----	47.0	-----	74.0	-----	27.0	-----	Peak
4 804.19	H	32.3	2.2	0.7	-----	35.2	-----	54.0	-----	18.8	Average
4 804.51	V	45.1	2.2	-----	47.3	-----	74.0	-----	26.7	-----	Peak
4 803.87	V	35.4	2.2	0.7	-----	38.3	-----	54.0	-----	15.7	Average
8 407.00	H	50.1	8.7	-----	58.8	-----	74.0	-----	15.2	-----	Peak
8 407.06	H	39.3	8.7	0.7	-----	48.7	-----	54.0	-----	5.3	Average
8 406.99	V	47.2	8.7	-----	55.9	-----	74.0	-----	18.1	-----	Peak
8 407.02	V	34.6	8.7	0.7	-----	44.0	-----	54.0	-----	10.0	Average

Middle channel (2 440 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
4 879.29	H	43.6	2.3	-----	45.9	-----	74.0	-----	28.1	-----	Peak
4 880.08	H	32.0	2.3	0.7	-----	35.0	-----	54.0	-----	19.0	Average
4 880.63	V	44.3	2.3	-----	46.6	-----	74.0	-----	27.4	-----	Peak
4 880.19	V	33.5	2.3	0.7	-----	36.5	-----	54.0	-----	17.5	Average
8 540.16	H	47.5	8.7	-----	56.2	-----	74.0	-----	17.8	-----	Peak
8 540.12	H	37.9	8.7	0.7	-----	47.3	-----	54.0	-----	6.7	Average
8 539.81	V	46.8	8.7	-----	55.5	-----	74.0	-----	18.5	-----	Peak
8 540.16	V	33.8	8.7	0.7	-----	43.2	-----	54.0	-----	10.8	Average



**CTK Co., Ltd.**  
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,  
 Yongin-si, Gyeonggi-do, Korea  
 Tel: +82-31-339-9970  
 Fax: +82-31-624-9501

Report No.:  
 CTK-2023-01324  
 Page (45) / (52) Pages

Highest channel (2 480 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
4 959.50	H	44.2	2.5	-----	46.7	-----	74.0	-----	27.3	-----	Peak
4 959.56	H	32.2	2.5	0.7	-----	35.4	-----	54.0	-----	18.6	Average
4 959.97	V	43.9	2.5	-----	46.4	-----	74.0	-----	27.6	-----	Peak
4 960.44	V	32.0	2.6	0.7	-----	35.3	-----	54.0	-----	18.7	Average
8 680.21	H	46.9	8.7	-----	55.6	-----	74.0	-----	18.4	-----	Peak
8 680.03	H	36.3	8.7	0.7	-----	45.7	-----	54.0	-----	8.3	Average
8 680.28	V	44.8	8.7	-----	53.5	-----	74.0	-----	20.5	-----	Peak
8 679.87	V	33.1	8.7	0.7	-----	42.5	-----	54.0	-----	11.5	Average

**Remarks**

1. The unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in lie-down position(X axis) and the worst case was recorded.
2. Peak Result = Reading + c.f(Correction factor)  
 Average Result = Reading + c.f(Correction factor) + Duty Cycle Factor
3. Correction factor = Antenna factor + Cable loss - Amp Gain

**Test mode : Transmitter (BT0, 2 Mbps)**

Lowest channel (2 402 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
7 204.43	H	48.6	7.9	-----	56.5	-----	74.0	-----	17.5	-----	Peak
7 204.51	H	34.8	7.9	2.4	-----	45.1	-----	54.0	-----	8.9	Average
7 204.65	V	46.7	7.9	-----	54.6	-----	74.0	-----	19.4	-----	Peak
7 207.26	V	36.0	7.9	2.4	-----	46.3	-----	54.0	-----	7.7	Average

Middle channel (2 440 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
7 321.22	H	46.9	8.1	-----	55.0	-----	74.0	-----	19.0	-----	Peak
7 323.61	H	35.1	8.1	2.4	-----	45.6	-----	54.0	-----	8.4	Average
7 321.87	V	46.8	8.1	-----	54.9	-----	74.0	-----	19.1	-----	Peak
7 321.21	V	35.2	8.1	2.4	-----	45.7	-----	54.0	-----	8.3	Average

Highest channel (2 480 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
7 440.51	H	48.0	8.1	-----	56.1	-----	74.0	-----	17.9	-----	Peak
7 439.80	H	34.6	8.1	2.4	-----	45.1	-----	54.0	-----	8.9	Average
7 441.74	V	46.6	8.1	-----	54.7	-----	74.0	-----	19.3	-----	Peak
7 441.36	V	35.2	8.1	2.4	-----	45.7	-----	54.0	-----	8.3	Average

**Remarks**

1. The unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in lie-down position(X axis) and the worst case was recorded.
2. Peak Result = Reading + c.f(Correction factor)  
Average Result = Reading + c.f(Correction factor) + Duty Cycle Factor
3. Correction factor = Antenna factor + Cable loss - Amp Gain



**CTK Co., Ltd.**  
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,  
 Yongin-si, Gyeonggi-do, Korea  
 Tel: +82-31-339-9970  
 Fax: +82-31-624-9501

Report No.:  
 CTK-2023-01324  
 Page (47) / (52) Pages

**Test mode : Transmitter (BT1, 2 Mbps)**

Lowest channel (2 402 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
4 805.01	H	43.9	2.2	-----	46.1	-----	74.0	-----	27.9	-----	Peak
4 803.37	H	31.8	2.2	2.4	-----	36.4	-----	54.0	-----	17.6	Average
4 804.59	V	44.5	2.2	-----	46.7	-----	74.0	-----	27.3	-----	Peak
4 804.29	V	33.0	2.2	2.4	-----	37.6	-----	54.0	-----	16.4	Average
8 407.06	H	49.1	8.7	-----	57.8	-----	74.0	-----	16.2	-----	Peak
8 406.86	H	37.7	8.7	2.4	-----	48.8	-----	54.0	-----	5.2	Average
8 407.40	V	45.7	8.7	-----	54.4	-----	74.0	-----	19.6	-----	Peak
8 406.84	V	33.8	8.7	2.4	-----	44.9	-----	54.0	-----	9.1	Average

Middle channel (2 440 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
4 880.58	H	43.2	2.3	-----	45.5	-----	74.0	-----	28.5	-----	Peak
4 880.32	H	31.7	2.3	2.4	-----	36.4	-----	54.0	-----	17.6	Average
4 879.40	V	43.7	2.3	-----	46.0	-----	74.0	-----	28.0	-----	Peak
4 879.85	V	32.4	2.3	2.4	-----	37.1	-----	54.0	-----	16.9	Average
8 539.90	H	48.6	8.7	-----	57.3	-----	74.0	-----	16.7	-----	Peak
8 539.94	H	35.7	8.7	2.4	-----	46.8	-----	54.0	-----	7.2	Average
8 539.78	V	45.3	8.7	-----	54.0	-----	74.0	-----	20.0	-----	Peak
8 539.91	V	33.0	8.7	2.4	-----	44.1	-----	54.0	-----	9.9	Average



**CTK Co., Ltd.**  
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,  
 Yongin-si, Gyeonggi-do, Korea  
 Tel: +82-31-339-9970  
 Fax: +82-31-624-9501

Report No.:  
 CTK-2023-01324  
 Page (48) / (52) Pages

Highest channel (2 480 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
8 680.11	H	46.8	8.7	-----	55.5	-----	74.0	-----	18.5	-----	Peak
8 679.91	H	35.4	8.7	2.4	-----	46.5	-----	54.0	-----	7.5	Average
8 680.06	V	44.5	8.7	-----	53.2	-----	74.0	-----	20.8	-----	Peak
8 678.70	V	33.8	8.7	2.4	-----	44.9	-----	54.0	-----	9.1	Average

**Remarks**

1. The unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in lie-down position(X axis) and the worst case was recorded.
2. Peak Result = Reading + c.f(Correction factor)  
 Average Result = Reading + c.f(Correction factor) + Duty Cycle Factor
3. Correction factor = Antenna factor + Cable loss - Amp Gain





## 4.6 AC Conducted Emissions

### Frequency Range of Measurement

150 kHz to 30 MHz

### Instrument Settings

IF Band Width: 9 kHz

### Test Procedures

ANSI C63.10-2013 - Section 6.2

The EUT was placed on a non-metallic table 0.8m above the metallic, grounded floor and 0.4m from the reference ground plane wall. The distance to other metallic surfaces was at least 0.8m.

Amplitude measurements were performed with a quasi-peak detector and an average detector.

### Limit

- 15.207(a)

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average**
0.15 ~ 0.5	66 to 56*	56 to 46*
0.5 ~ 5	56	46
5 ~ 30	60	50

\* The level decreases linearly with the logarithm of the frequency.

\*\* A linear average detector is required.

### Test Results


The requirements are:

Complies

## Test Data

[LINE]

Full Spectrum

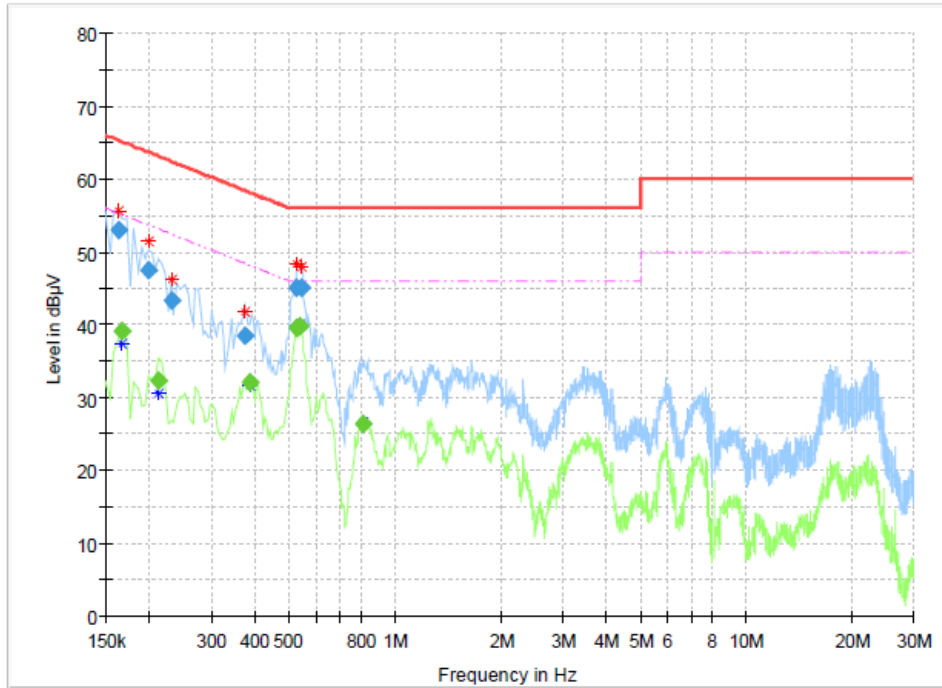


## Final Result

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.163500	52.89	---	65.28	12.39	15000.0	9.000	L1	ON	9.9
0.168000	---	39.14	55.06	15.92	15000.0	9.000	L1	ON	10.0
0.199500	47.42	---	63.63	16.21	15000.0	9.000	L1	ON	9.8
0.213000	---	32.39	53.09	20.70	15000.0	9.000	L1	ON	9.8
0.231000	43.22	---	62.41	19.19	15000.0	9.000	L1	ON	9.7
0.375000	38.39	---	58.39	20.00	15000.0	9.000	L1	ON	9.9
0.388500	---	32.06	48.10	16.03	15000.0	9.000	L1	ON	9.9
0.528000	---	39.50	46.00	6.50	15000.0	9.000	L1	ON	10.0
0.528000	45.15	---	56.00	10.85	15000.0	9.000	L1	ON	10.0
0.537000	---	39.69	46.00	6.31	15000.0	9.000	L1	ON	10.0
0.541500	44.96	---	56.00	11.04	15000.0	9.000	L1	ON	10.0
0.811500	---	26.30	46.00	19.70	15000.0	9.000	L1	ON	9.9

[NEUTRAL]

Full Spectrum

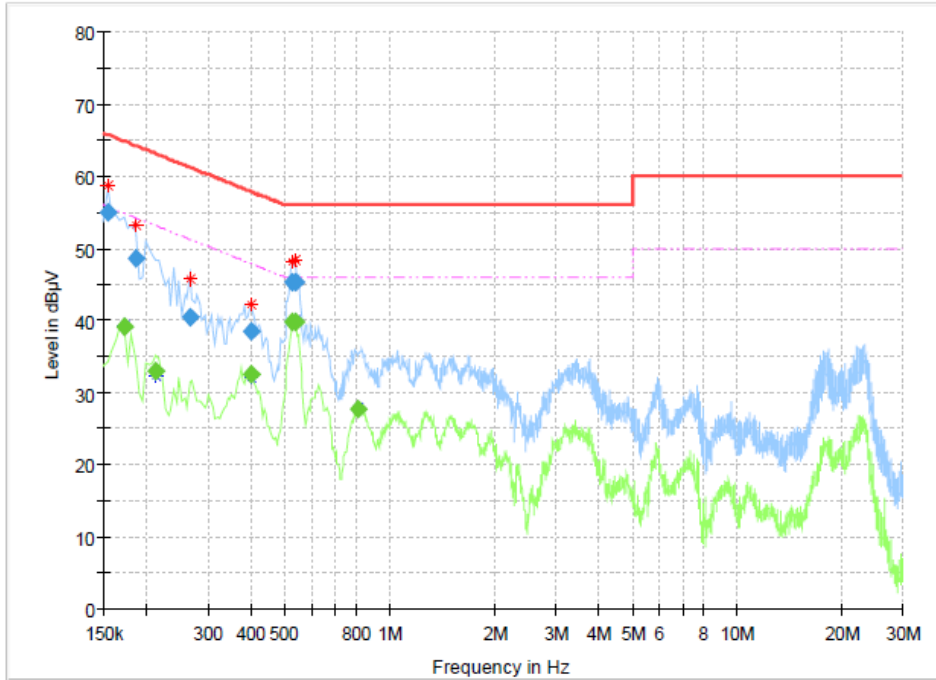

**Final Result**

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.154500	55.01	---	65.75	10.74	15000.0	9.000	N	ON	9.9
0.172500	---	39.05	54.84	15.78	15000.0	9.000	N	ON	10.0
0.186000	48.56	---	64.21	15.66	15000.0	9.000	N	ON	10.0
0.213000	---	32.98	53.09	20.11	15000.0	9.000	N	ON	9.9
0.267000	40.46	---	61.21	20.75	15000.0	9.000	N	ON	9.8
0.402000	---	32.44	47.81	15.37	15000.0	9.000	N	ON	9.9
0.402000	38.53	---	57.81	19.29	15000.0	9.000	N	ON	9.9
0.528000	---	39.77	46.00	6.23	15000.0	9.000	N	ON	10.0
0.528000	45.28	---	56.00	10.72	15000.0	9.000	N	ON	10.0
0.537000	---	39.82	46.00	6.18	15000.0	9.000	N	ON	10.0
0.537000	45.34	---	56.00	10.66	15000.0	9.000	N	ON	10.0
0.816000	---	27.74	46.00	18.26	15000.0	9.000	N	ON	9.9



**CTK Co., Ltd.**  
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,  
 Yongin-si, Gyeonggi-do, Korea  
 Tel: +82-31-339-9970  
 Fax: +82-31-624-9501

Report No.:  
 CTK-2023-01324  
 Page (52) / (52) Pages

## APPENDIX A – Test Equipment Used For Tests

	Name of Equipment	Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date
1	Signal Analyzer	Agilent	N9020A	MY49101016	2022-10-07	2023-10-07
2	Signal Generator	Rohde & Schwarz	SMB100A	175528	2023-03-22	2024-03-22
3	EMI TEST RECEIVER	Rohde & Schwarz	ESW44	102039	2022-05-04	2023-05-04
					2023-05-03	2024-05-03
4	BILOG ANTENNA	TESEQ	CBL6111D	60654	2021-09-03	2023-09-03
5	Active Loop Antenna	SCHWARZBECK	FMZB 1513	1513-125	2022-04-15	2024-04-15
6	6dB Attenuator	PASTERNAK	PE7AP006-06	L20210504000023	2022-08-10	2023-08-10
7	AMPLIFIER	SONOMA INSTRUMENT	310N	411011	2022-08-10	2023-08-10
8	Spectrum Analyzer	R&S	FSV40	101574	2023-01-11	2024-01-11
9	PRE AMPLIFIER	HP	8449B	3008A00620	2023-04-21	2024-04-21
10	Double Ridged Guide Antenna	ETS-Lindgren	3115	00078895	2023-04-13	2024-04-13
11	HORN ANTENNA	SCHWARZBECK	BBHA9170	1153	2022-10-31	2023-10-31
12	LOW NOISE AMPLIFIER	TESTEK	TK-PA1840H	210124-L	2022-11-09	2023-11-09
13	Band Reject Filter	Micro Tronics	BRM50702	G233	2023-01-03	2024-01-03
14	EMI Test Receiver	R&S	ESR3	102826	2022-05-04	2023-05-04
					2023-05-03	2024-05-03
15	LISN	R&S	ENV216	102698	2022-05-13	2023-05-13
					2023-05-03	2024-05-03

	Cable	Manufacturer	Model No.	Serial No.	Check Date
1	RF Cable (Conducted)	Junkosha Inc.	MWX221	1512S151	2023-03-21
2	RF Cable (Line Conducted)	Canare Corporation	L-5D2W	N/A	2023-03-06
3	RF Cable (9 kHz - 1 GHz Radiated)	HUBER+SUHNER	SUCOFLEX 104	MY27558/4	2023-03-06
4	RF Cable (9 kHz - 1 GHz Radiated)	HUBER+SUHNER	L-5D2W	N/A	2023-03-06
5	RF Cable (1 GHz - 18 GHz Radiated)	Junkosha Inc.	MWX221	2008S246	2023-04-03
6	RF Cable (1 GHz - 18 GHz Radiated)	Junkosha Inc.	MWX221	J0970749	2023-04-03
7	RF Cable (1 GHz - 18 GHz Radiated)	Sensorview Co., LTD	13A26	TPC2204060007	2023-04-03
8	RF Cable (18 GHz - 40 GHz Radiated)	Sensorview Co., LTD	9S40	TPC2204060009	2022-04-14
9	RF Cable (18 GHz - 40 GHz Radiated)	Sensorview Co., LTD	9A40	TP210713-001	2022-04-14

-END-