


Worst Case Mode :	802.11ax_HE40_484T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 875 MHz
Channel :	175

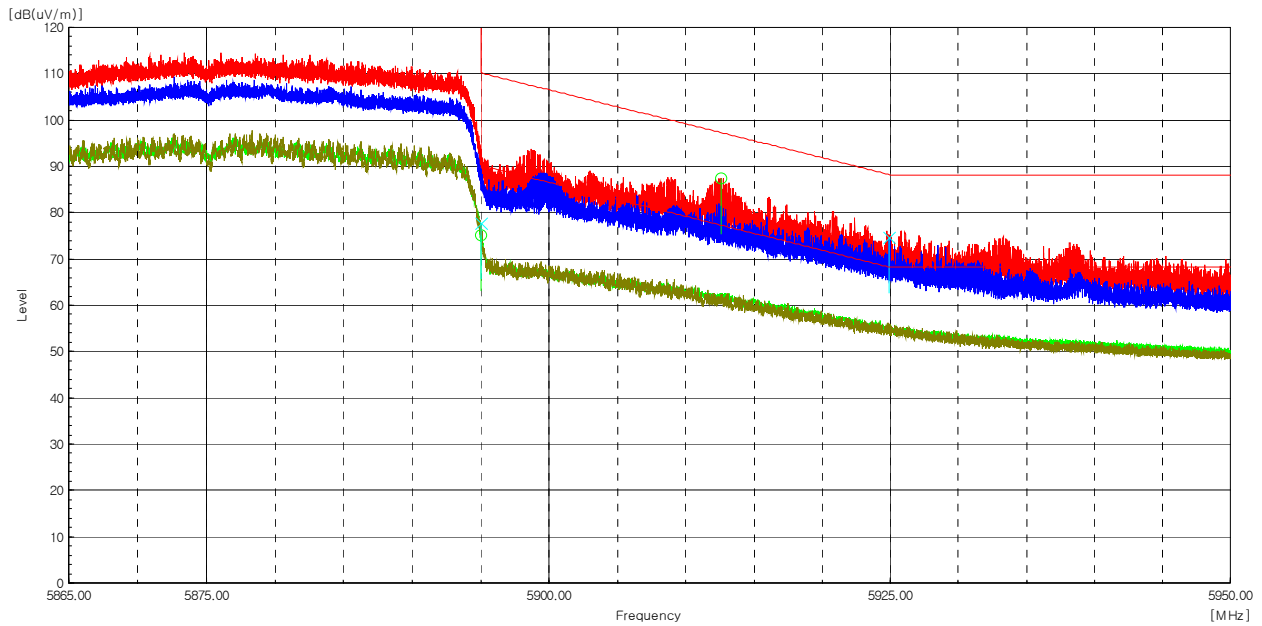

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
5 912.60	H	82.4	5.0	-----	87.4	-----	97.3	-----	9.9	-----	Peak
5 895.00	H	70.1	5.0	0.3	-----	75.4	-----	90.2	-----	14.8	Average
5 924.92	V	69.6	5.0	-----	74.6	-----	88.3	-----	13.7	-----	Peak
5 895.02	V	72.7	5.0	0.3	-----	78.0	-----	90.2	-----	12.2	Average

Radiated Restricted Band Edge Plot

**Test mode : Transmitter, 802.11ac\_VHT80**

The requirements are:

Complies

**Test Data**


Ch.171(5 855 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
11 737.22	H	48.0	12.5	-----	60.5	-----	74.0	-----	13.5	-----	Peak
11 741.37	H	33.9	12.6	0.9	-----	47.4	-----	54.0	-----	6.6	Average
11 756.43	V	44.0	12.7	-----	56.7	-----	74.0	-----	17.3	-----	Peak
11 760.75	V	32.9	12.7	0.9	-----	46.5	-----	54.0	-----	7.5	Average
17 609.97	H	44.5	20.7	-----	65.2	-----	68.2	-----	3.0	-----	Peak
17 565.00	V	45.8	20.5	-----	66.3	-----	68.2	-----	1.9	-----	Peak

**Remarks**

1. The unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in lie-down position(Y axis) and the worst case was recorded.
2. Peak Result = Reading + c.f(Correction factor)  
Average Result = Reading + c.f(Correction factor) + Duty Cycle Factor
3. Correction factor = Antenna factor + Cable loss - Amp Gain

Worst Case Mode :	802.11ac_VHT80
Worst Case Transfer Rate :	MNSS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 855 MHz
Channel :	171

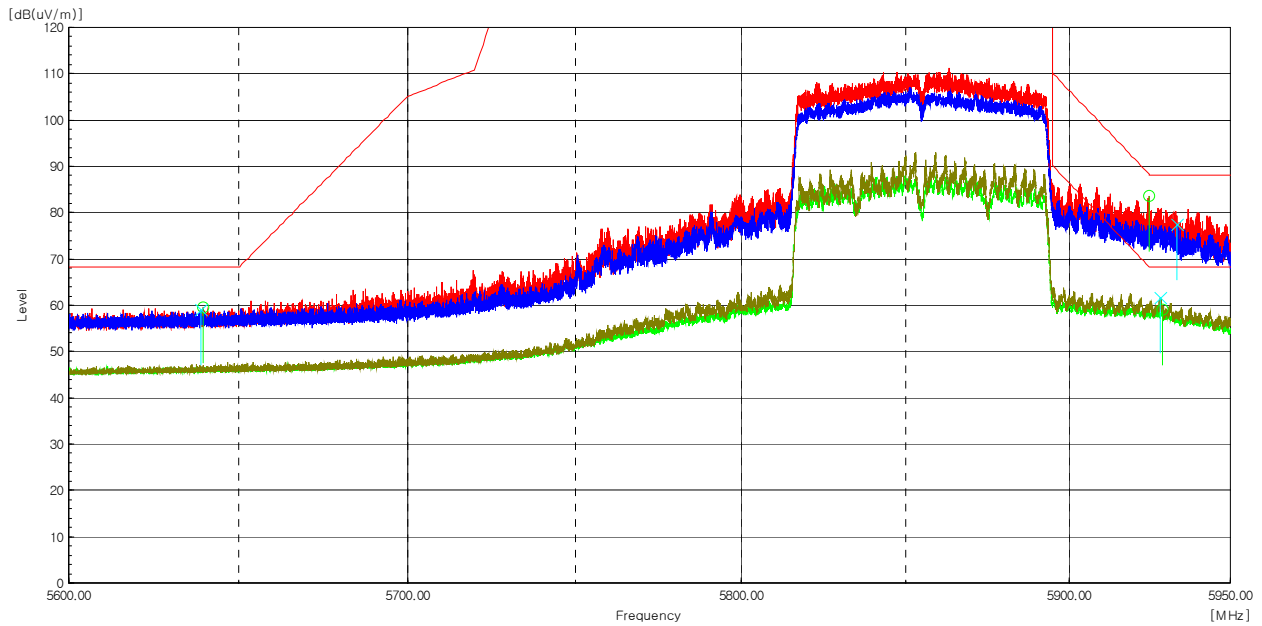

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
5 639.38	H	55.4	4.1	-----	59.5	-----	68.2	-----	8.7	-----	Peak
5 638.85	V	54.9	4.1	-----	59.0	-----	68.2	-----	9.2	-----	Peak
5924.79	H	78.6	5.0	-----	83.6	-----	88.4	-----	4.8	-----	Peak
5928.89	H	54.0	5.0	0.9	-----	59.9	-----	68.2	-----	8.3	Average
5 933.34	V	72.5	4.9	-----	77.4	-----	88.2	-----	10.8	-----	Peak
5 928.26	V	56.7	5.0	0.9	-----	62.6	-----	68.2	-----	5.6	Average

Radiated Restricted Band Edge Plot



**CTK Co., Ltd.**  
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,  
 Yongin-si, Gyeonggi-do, Korea  
 Tel: +82-31-339-9970  
 Fax: +82-31-624-9501

Report No.:  
 CTK-2023-01431  
 Page (162) / (179) Pages

**Test mode : Transmitter, 802.11ax\_HE80\_26T**

The requirements are:

Complies

**Test Data**


Ch.171(5 855 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
11 786.16	H	49.8	12.8	-----	62.6	-----	74.0	-----	11.4	-----	Peak
11 785.52	H	34.0	12.8	0.2	-----	47.0	-----	54.0	-----	7.0	Average
11 785.22	V	42.7	12.8	-----	55.5	-----	74.0	-----	18.5	-----	Peak
11 787.04	V	32.3	12.8	0.2	-----	45.3	-----	54.0	-----	8.7	Average

**Remarks**

1. The unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down positon(X,Y axis). The worst emission was found in lie-down positon(Y axis) and the worst case was recorded.
2. Peak Result = Reading + c.f(Correction factor)  
 Average Result = Reading + c.f(Correction factor) + Duty Cycle Factor
3. Correction factor = Antenna factor + Cable loss - Amp Gain

Worst Case Mode :	802.11ax_HE80_26T_Low
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 855 MHz
Channel :	171

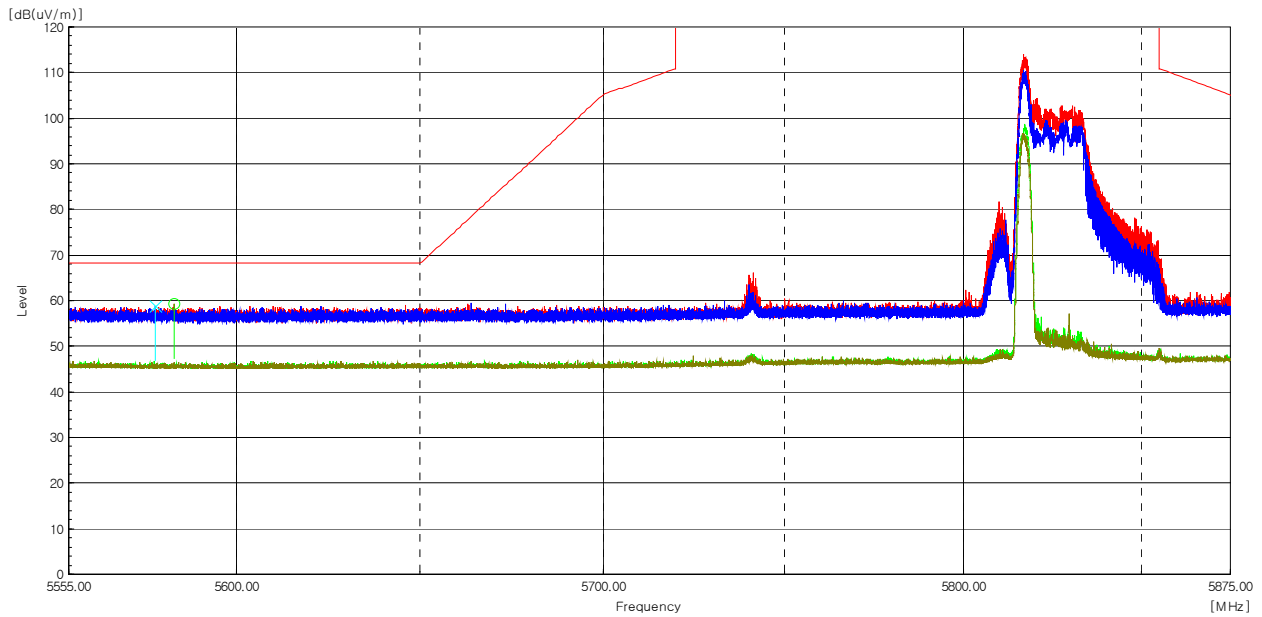


Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
-----------------	-----	----------------	---------------	------------------------	---------------------	---------------------	---------------------	---------------------	----------------	----------------	------

The emissions above 1 GHz were 20 dB lower than the limit.

### Radiated Restricted Band Edge Plot

Worst Case Mode :	802.11ax_HE80_26T_High
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 855 MHz
Channel :	171

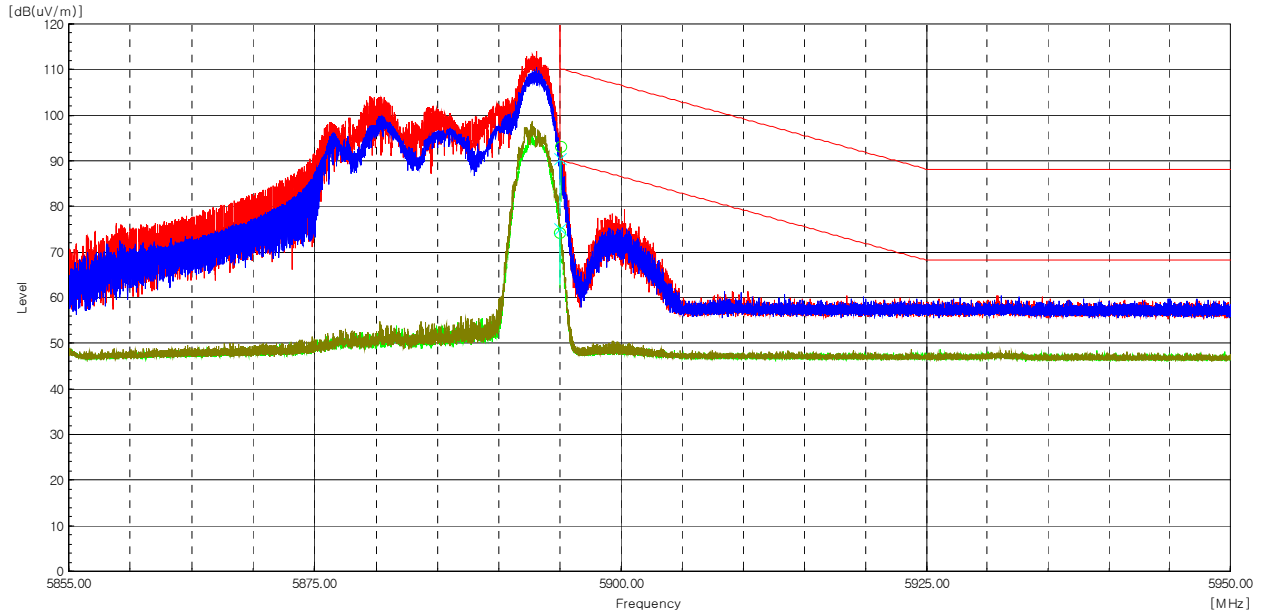

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
5 895.10	H	88.1	5.0	-----	93.1	-----	110.1	-----	17.0	-----	Peak
5 895.00	H	69.3	5.0	0.2	-----	74.5	-----	90.2	-----	15.7	Average
5 895.02	V	85.6	5.0	-----	90.6	-----	110.2	-----	19.6	-----	Peak
5 895.01	V	70.1	5.0	0.2	-----	75.3	-----	90.2	-----	14.9	Average

Radiated Restricted Band Edge Plot


**Test mode : Transmitter, 802.11ax\_HE80\_52T**

The requirements are:

Complies

**Test Data**

Worst Case Mode :	802.11ax_HE80_52T_Low
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 855 MHz
Channel :	171

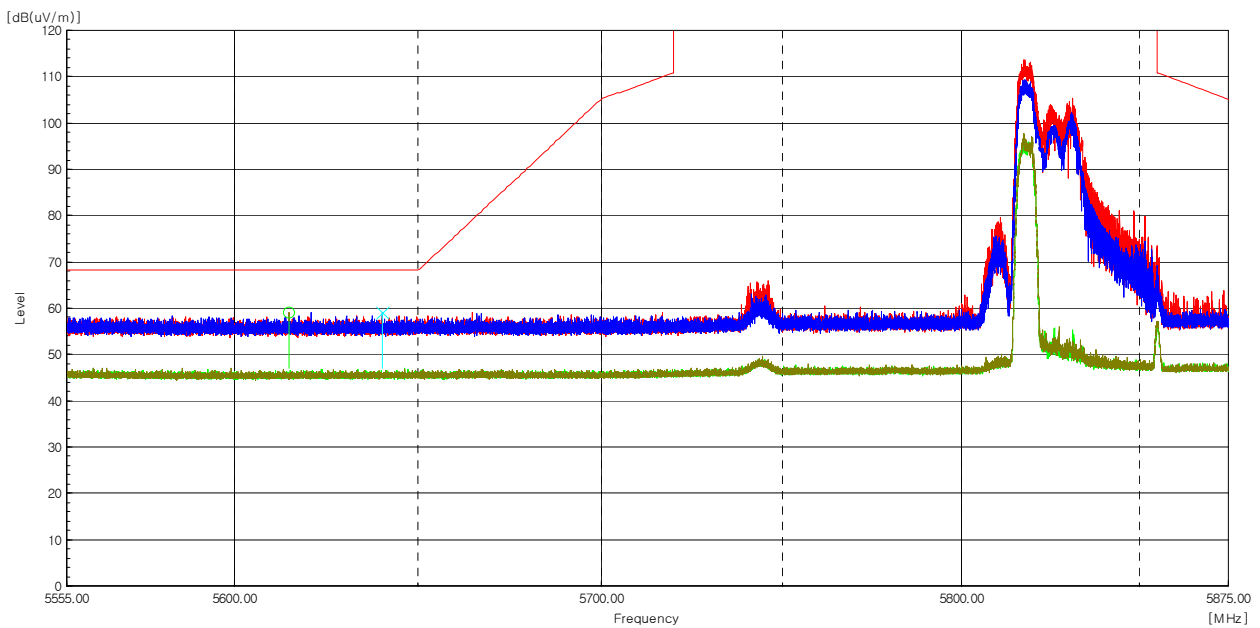


Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
-----------------	-----	----------------	---------------	------------------------	---------------------	---------------------	---------------------	---------------------	----------------	----------------	------

The emissions above 1 GHz were 20 dB lower than the limit.

Radiated Restricted Band Edge Plot

Worst Case Mode :	802.11ax_HE80_52T_High
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 855 MHz
Channel :	171

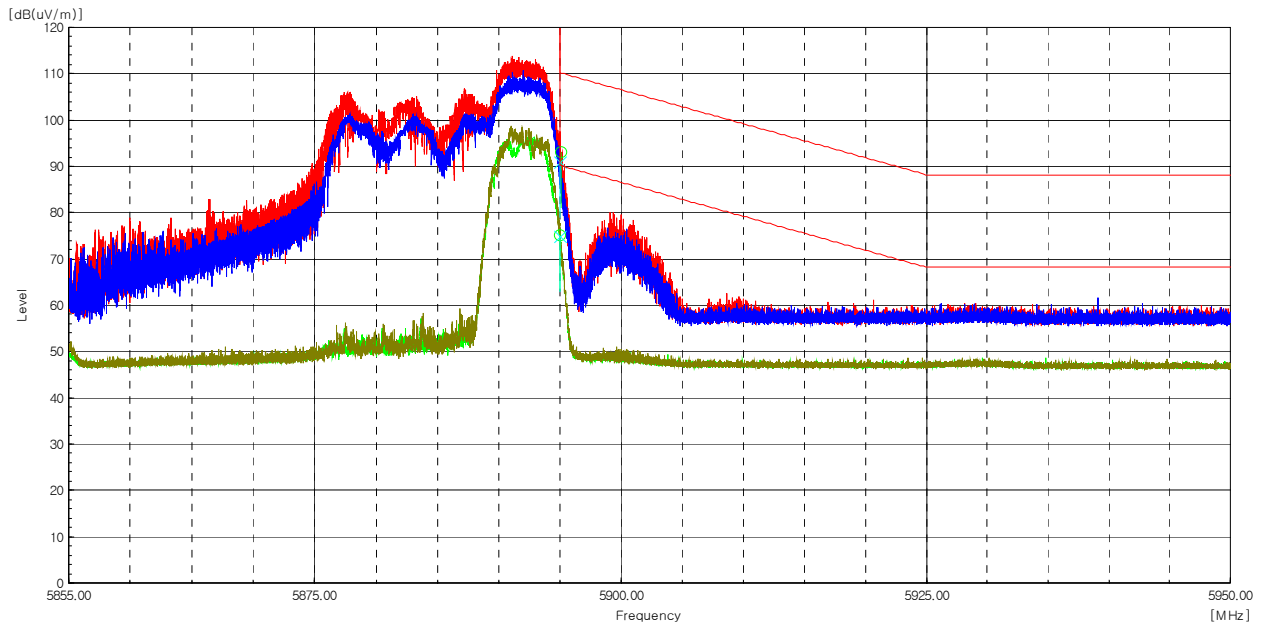

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
5 895.06	H	88.1	5.0	-----	93.1	-----	110.2	-----	17.1	-----	Peak
5 895.00	H	70.0	5.0	0.2	-----	75.2	-----	90.2	-----	15.0	Average
5 895.02	V	86.0	5.0	-----	91.0	-----	110.2	-----	19.2	-----	Peak
5 895.01	V	70.0	5.0	0.2	-----	75.2	-----	90.2	-----	15.0	Average

Radiated Restricted Band Edge Plot




**Test mode : Transmitter, 802.11ax\_HE80\_106T**

The requirements are:

Complies

**Test Data**

Worst Case Mode :	802.11ax_HE80_106T_Low
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 855 MHz
Channel :	171

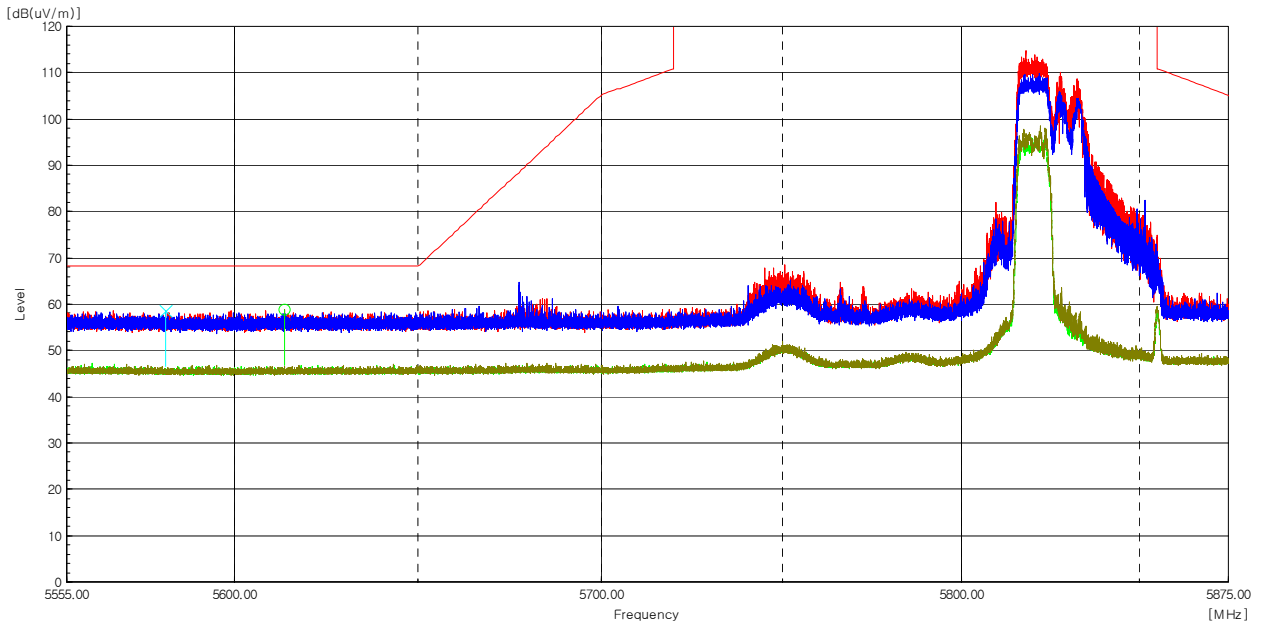


Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
-----------------	-----	----------------	---------------	------------------------	---------------------	---------------------	---------------------	---------------------	----------------	----------------	------

The emissions above 1 GHz were 20 dB lower than the limit.

Radiated Restricted Band Edge Plot

Worst Case Mode :	802.11ax_HE80_106T_High
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 855 MHz
Channel :	171

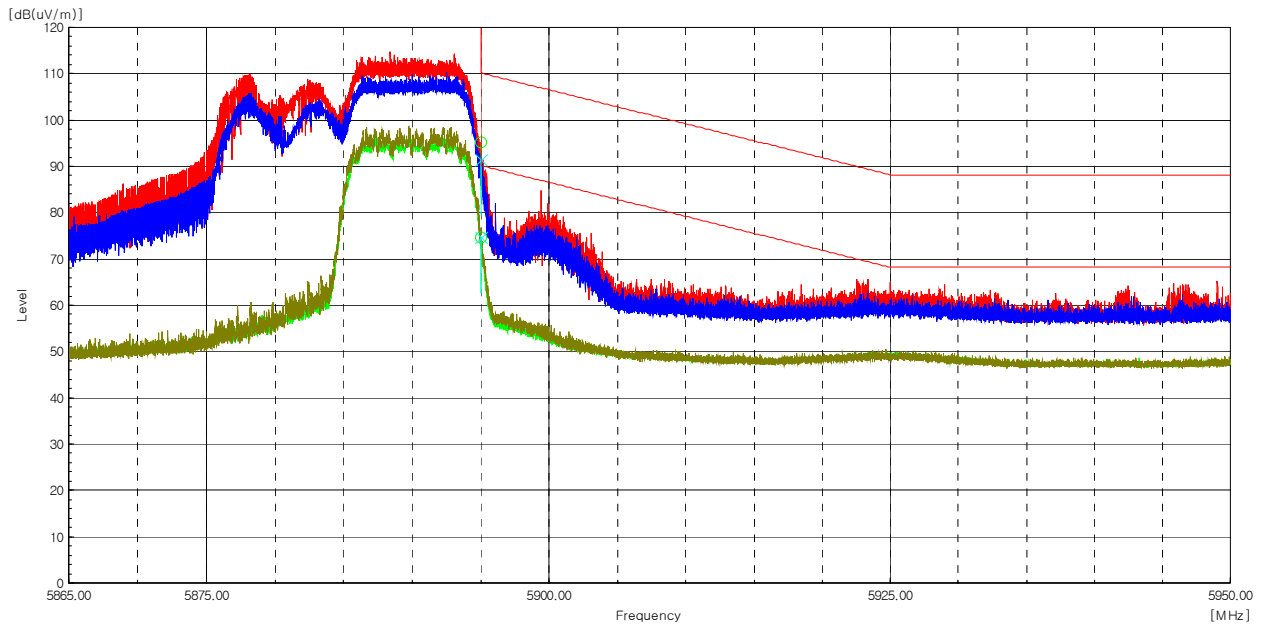

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
5 895.01	H	90.2	5.0	-----	95.2	-----	110.2	-----	15.0	-----	Peak
5 895.00	H	69.7	5.0	0.2	-----	74.9	-----	90.2	-----	15.3	Average
5 895.06	V	86.4	5.0	-----	91.4	-----	110.2	-----	18.8	-----	Peak
5 895.07	V	69.7	5.0	0.2	-----	74.9	-----	90.2	-----	15.3	Average

Radiated Restricted Band Edge Plot


**Test mode : Transmitter, 802.11ax\_HE80\_242T**

The requirements are:

Complies

**Test Data**

Worst Case Mode :	802.11ax_HE80_242T_Low
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 855 MHz
Channel :	171

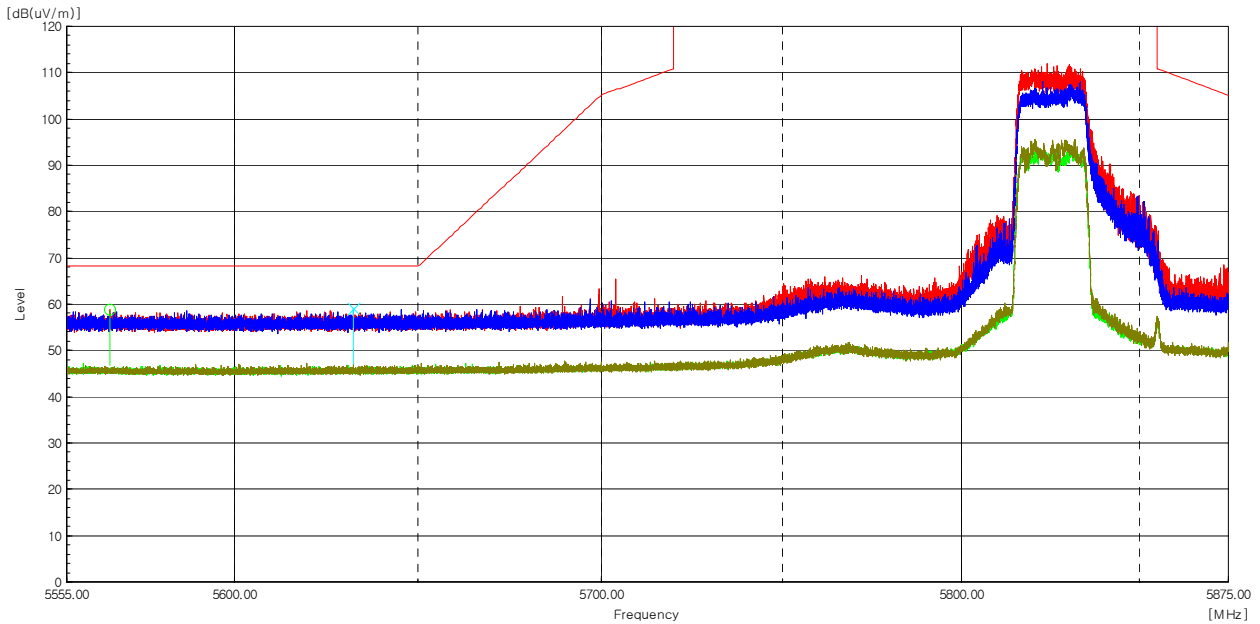


Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
-----------------	-----	----------------	---------------	------------------------	---------------------	---------------------	---------------------	---------------------	----------------	----------------	------

The emissions above 1 GHz were 20 dB lower than the limit.

Radiated Restricted Band Edge Plot

Worst Case Mode :	802.11ax_HE80_242T_High
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 855 MHz
Channel :	171

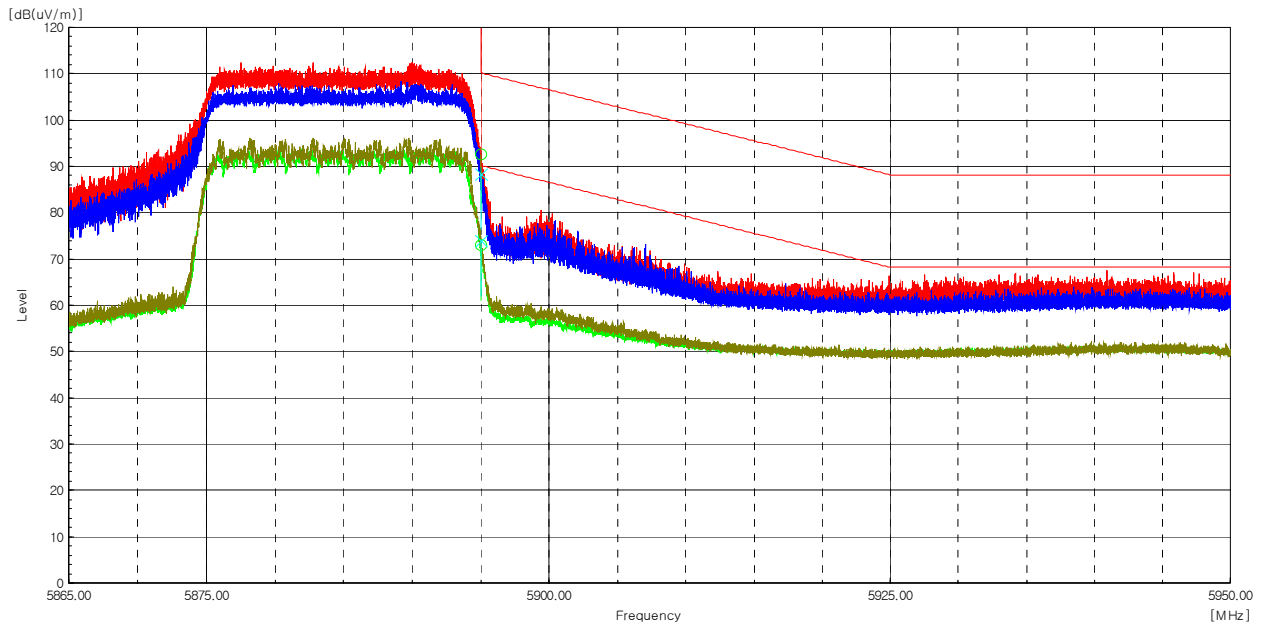

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
5 895.01	H	87.7	5.0	-----	92.7	-----	110.2	-----	17.5	-----	Peak
5 895.00	H	67.9	5.0	0.3	-----	73.2	-----	90.2	-----	17.0	Average
5 895.02	V	83.2	5.0	-----	88.2	-----	110.2	-----	22.0	-----	Peak
5 895.00	V	68.8	5.0	0.3	-----	74.1	-----	90.2	-----	16.1	Average

Radiated Restricted Band Edge Plot


**Test mode : Transmitter, 802.11ax\_HE80\_484T**

The requirements are:

Complies

**Test Data**

Worst Case Mode :	802.11ax_HE80_484T_Low
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 855 MHz
Channel :	171

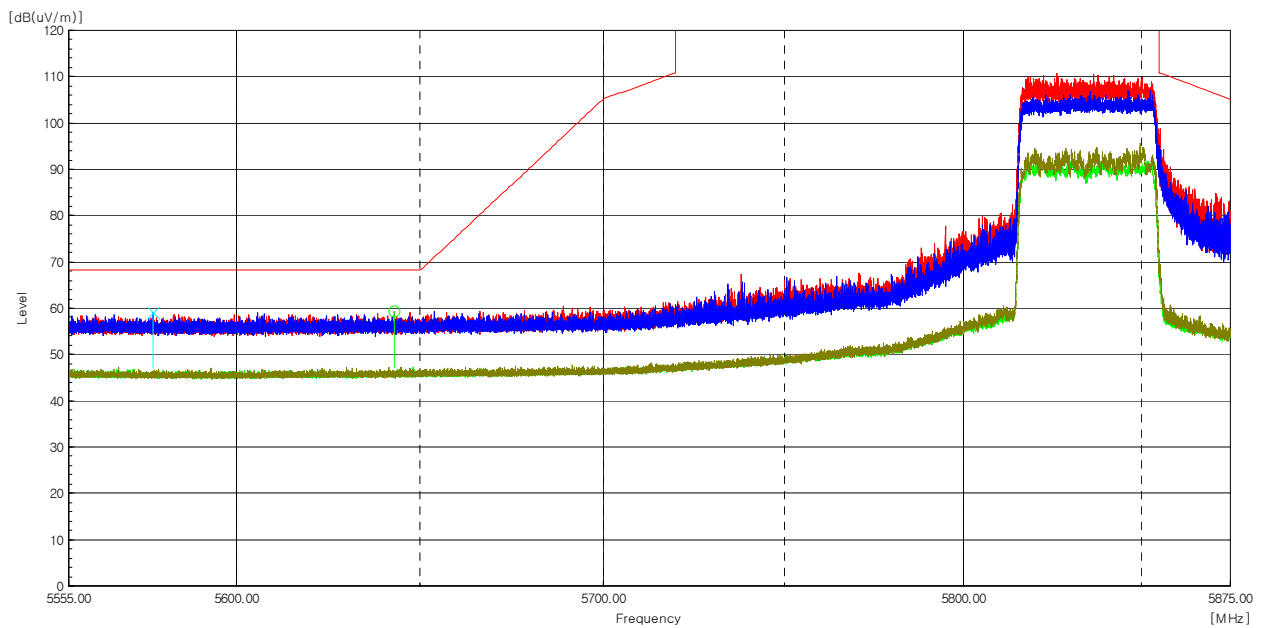


Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
-----------------	-----	----------------	---------------	------------------------	---------------------	---------------------	---------------------	---------------------	----------------	----------------	------

The emissions above 1 GHz were 20 dB lower than the limit.

**Radiated Restricted Band Edge Plot**

Worst Case Mode :	802.11ax_HE80_484T_High
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 855 MHz
Channel :	171

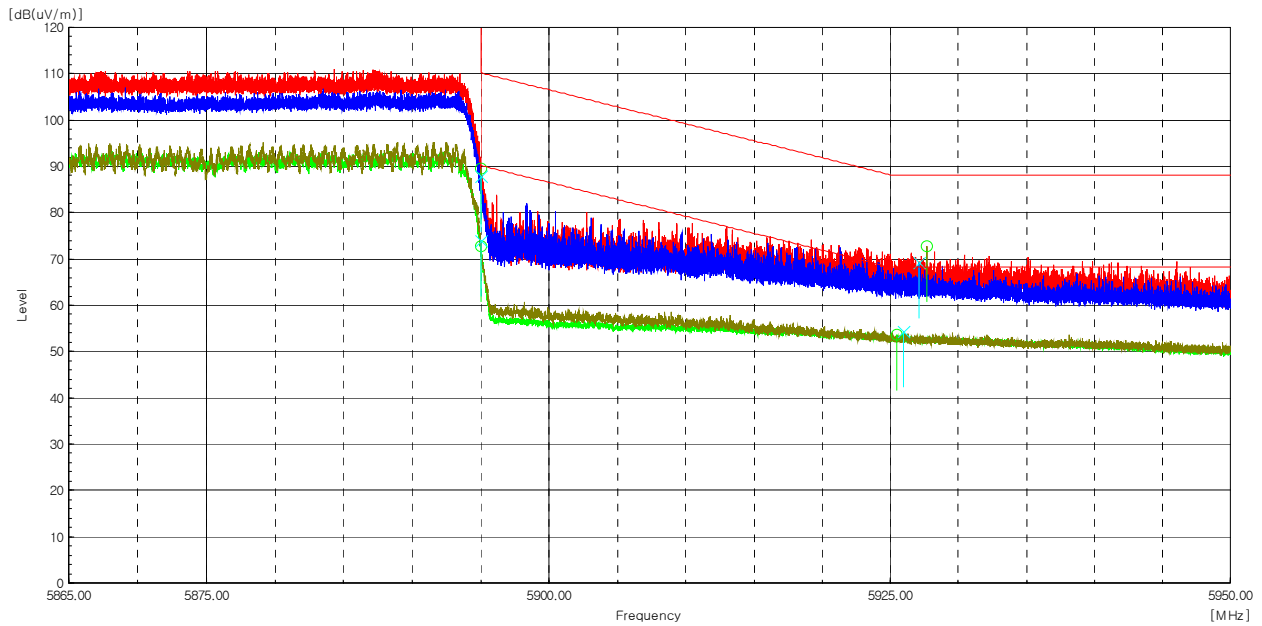

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
5 895.03	H	84.4	5.0	-----	89.4	-----	110.2	-----	20.8	-----	Peak
5 895.00	H	67.9	5.0	0.3	-----	73.2	-----	90.2	-----	17.0	Average
5 895.05	V	83.0	5.0	-----	88.0	-----	110.2	-----	22.2	-----	Peak
5 895.01	V	69.0	5.0	0.3	-----	74.3	-----	90.2	-----	15.9	Average
5 927.68	H	67.8	5.0	-----	72.8	-----	88.2	-----	15.4	-----	Peak
5 925.45	H	48.7	5.0	0.3	-----	54.0	-----	68.2	-----	14.2	Average
5 927.13	V	64.3	5.0	-----	69.3	-----	88.2	-----	18.9	-----	Peak
5 925.95	V	49.4	5.0	0.3	-----	54.7	-----	68.2	-----	13.5	Average

Radiated Restricted Band Edge Plot



**CTK Co., Ltd.**  
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,  
 Yongin-si, Gyeonggi-do, Korea  
 Tel: +82-31-339-9970  
 Fax: +82-31-624-9501

Report No.:  
 CTK-2023-01431  
 Page (173) / (179) Pages

**Test mode : Transmitter, 802.11ax\_HE80\_996T**

The requirements are:

Complies

**Test Data**


Ch.171(5 855 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
11 709.71	H	46.7	12.4	-----	59.1	-----	74.0	-----	14.9	-----	Peak
11 735.29	H	33.2	12.5	0.3	-----	45.7	-----	54.0	-----	8.3	Average
11 745.51	V	43.9	12.6	-----	56.5	-----	74.0	-----	17.5	-----	Peak
11 711.49	V	32.6	12.4	0.3	-----	45.0	-----	54.0	-----	9.0	Average
17 485.25	H	44.3	20.5	-----	64.8	-----	68.2	-----	3.4	-----	Peak
17 471.97	V	44.7	20.4	-----	65.1	-----	68.2	-----	3.1	-----	Peak

**Remarks**

1. The unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in lie-down position(Y axis) and the worst case was recorded.
2. Peak Result = Reading + c.f(Correction factor)  
 Average Result = Reading + c.f(Correction factor) + Duty Cycle Factor
3. Correction factor = Antenna factor + Cable loss - Amp Gain

Worst Case Mode :	802.11ax_HE80_996T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 855 MHz
Channel :	171

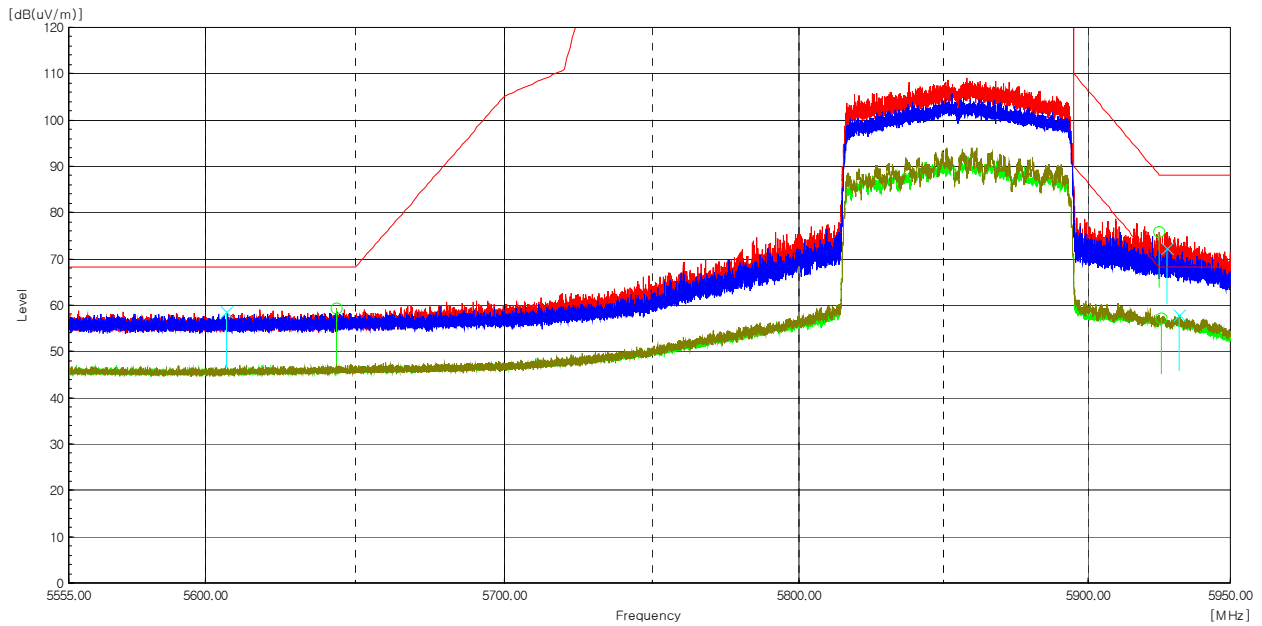

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
5 643.80	H	55.2	4.1	-----	59.3	-----	68.2	-----	8.9	-----	Peak
5 607.24	V	54.4	4.1	-----	58.5	-----	68.2	-----	9.7	-----	Peak
5 925.19	H	70.9	5.0	-----	75.9	-----	88.2	-----	12.3	-----	Peak
5 925.95	H	52.3	5.0	0.3	-----	57.6	-----	68.2	-----	10.6	Average
5 927.71	V	67.2	5.0	-----	72.2	-----	88.2	-----	16.0	-----	Peak
5 931.97	V	52.8	5.0	0.3	-----	58.1	-----	68.2	-----	10.1	Average

Radiated Restricted Band Edge Plot



## 4.7 AC Conducted Emissions

### Test Location

Shielded Room

### Frequency Range of Measurement

150 kHz to 30 MHz

### Instrument Settings

IF Band Width: 9 kHz

### Test Procedures

ANSI C63.10-2013 - Section 6.2

The EUT was placed on a non-metallic table 0.8m above the metallic, grounded floor and 0.4m from the reference ground plane wall. The distance to other metallic surfaces was at least 0.8m.

Amplitude measurements were performed with a quasi-peak detector and an average detector.

### Limit

- 15.207(a)

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average**
0.15 ~ 0.5	66 to 56*	56 to 46*
0.5 ~ 5	56	46
5 ~ 30	60	50

\* The level decreases linearly with the logarithm of the frequency.

\*\* A linear average detector is required.

### Test Results


The requirements are:

Complies

## Test Data

[LINE]


Full Spectrum

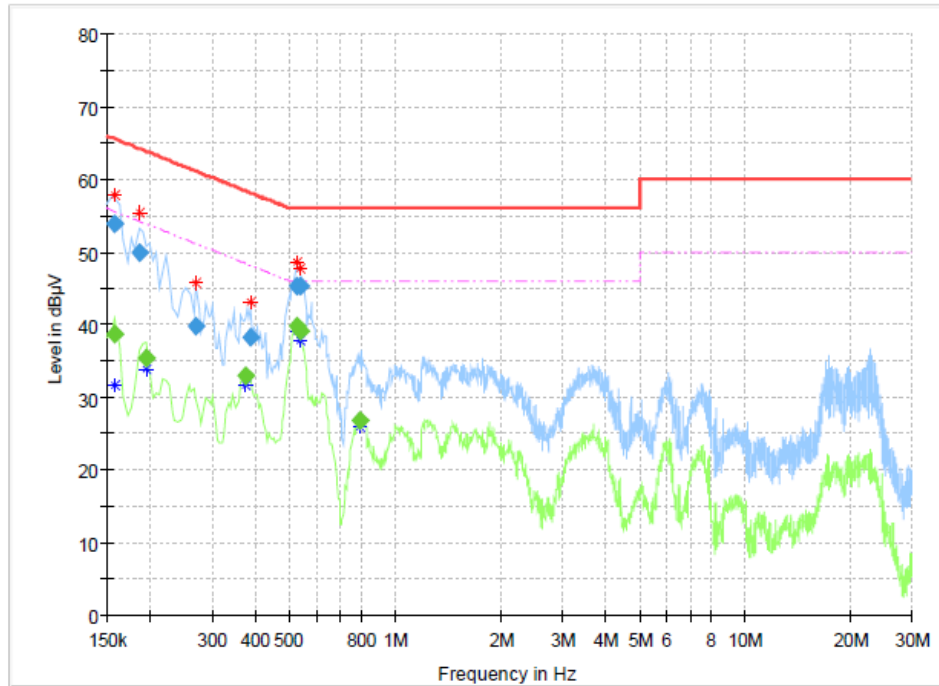

## Final Result

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.159000	---	38.76	55.52	16.76	15000.0	9.000	L1	ON	9.9
0.159000	53.77	---	65.52	11.74	15000.0	9.000	L1	ON	9.9
0.186000	49.85	---	64.21	14.37	15000.0	9.000	L1	ON	9.9
0.195000	---	35.34	53.82	18.48	15000.0	9.000	L1	ON	9.9
0.271500	39.76	---	61.07	21.31	15000.0	9.000	L1	ON	9.7
0.375000	---	32.99	48.39	15.40	15000.0	9.000	L1	ON	9.9
0.388500	38.26	---	58.10	19.83	15000.0	9.000	L1	ON	9.9
0.523500	45.28	---	56.00	10.72	15000.0	9.000	L1	ON	10.0
0.528000	---	39.69	46.00	6.31	15000.0	9.000	L1	ON	10.0
0.537000	---	39.22	46.00	6.78	15000.0	9.000	L1	ON	10.0
0.537000	45.26	---	56.00	10.74	15000.0	9.000	L1	ON	10.0
0.798000	---	26.74	46.00	19.26	15000.0	9.000	L1	ON	9.9

[NEUTRAL]  
Full Spectrum

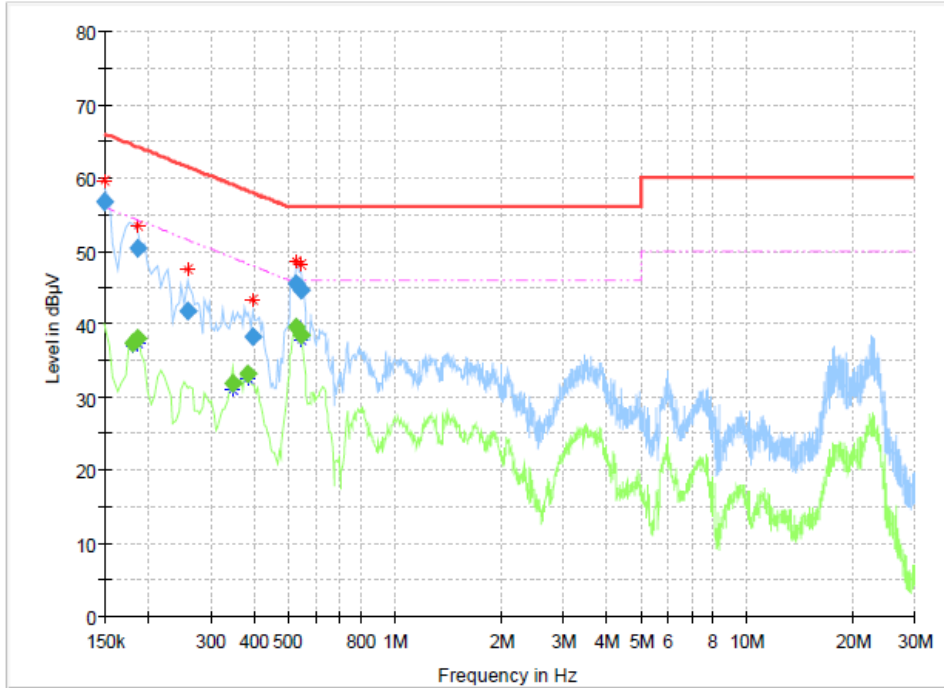

**Final Result**

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.150000	56.72	---	66.00	9.28	15000.0	9.000	N	ON	9.8
0.181500	---	37.41	54.42	17.00	15000.0	9.000	N	ON	10.0
0.186000	---	37.94	54.21	16.28	15000.0	9.000	N	ON	10.0
0.186000	50.35	---	64.21	13.87	15000.0	9.000	N	ON	10.0
0.258000	41.82	---	61.50	19.67	15000.0	9.000	N	ON	9.8
0.348000	---	31.89	49.01	17.12	15000.0	9.000	N	ON	9.9
0.384000	---	33.13	48.19	15.07	15000.0	9.000	N	ON	9.9
0.397500	38.16	---	57.91	19.74	15000.0	9.000	N	ON	9.9
0.523500	---	39.67	46.00	6.33	15000.0	9.000	N	ON	10.0
0.528000	45.58	---	56.00	10.42	15000.0	9.000	N	ON	10.0
0.541500	---	38.53	46.00	7.47	15000.0	9.000	N	ON	10.0
0.541500	44.55	---	56.00	11.45	15000.0	9.000	N	ON	10.0



**CTK Co., Ltd.**  
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,  
 Yongin-si, Gyeonggi-do, Korea  
 Tel: +82-31-339-9970  
 Fax: +82-31-624-9501

Report No.:  
 CTK-2023-01431  
 Page (178) / (179) Pages

## APPENDIX A – Test Equipment Used For Tests

	Name of Equipment	Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date
1	Signal Analyzer	Agilent	N9020A	MY49101016	2022-10-07	2023-10-07
2	Signal Analyzer	Agilent	N9020A	MY46471102	2023-01-11	2024-01-11
3	Signal Generator	Rohde & Schwarz	SMB100A	175528	2023-03-22	2024-03-22
4	Power Meter	Anritsu	ML2488B	0924006	2022-10-13	2023-10-13
5	Wide Bandwidth Sensor	Anritsu	MA2491A	0845498	2022-10-14	2023-10-14
6	EMI TEST RECEIVER	Rohde & Schwarz	ESW44	102039	2022-05-04	2023-05-04
					2023-05-03	2024-05-03
7	BILOG ANTENNA	TESEQ	CBL6111D	60654	2021-09-03	2023-09-03
8	Active Loop Antenna	SCHWARZBECK	FMZB 1513	1513-125	2022-04-15	2024-04-15
9	6dB Attenuator	PASTERNAK	PE7AP006-06	L20210504000023	2022-08-10	2023-08-10
10	AMPLIFIER	SONOMA INSTRUMENT	310N	411011	2022-08-10	2023-08-10
11	Spectrum Analyzer	R&S	FSV40	101574	2023-01-11	2024-01-11
12	PRE AMPLIFIER	HP	8449B	3008A00620	2023-04-21	2024-04-21
13	Double Ridged Guide Antenna	ETS-Lindgren	3115	00078895	2023-04-13	2024-04-13
14	Double Ridged Guide Antenna	ETS-Lindgren	3115	00078894	2022-11-21	2023-11-21
15	HORN ANTENNA	SCHWARZBECK	BBHA9170	1153	2022-10-31	2023-10-31
16	LOW NOISE AMPLIFIER	TESTEK	TK-PA1840H	210124-L	2022-11-09	2023-11-09
17	Band Reject Filter	Micro Tronics	BRM50716	G184	2023-01-03	2024-01-03
18	EMI Test Receiver	R&S	ESR3	102826	2022-05-04	2023-05-04
					2023-05-03	2024-05-03
19	LISN	R&S	ENV216	102698	2022-05-13	2023-05-13
					2023-05-03	2024-05-03
20	Temp&Humi Chamber	ESPEC CORP.	SH-242	93012243	2023-01-20	2024-01-20
21	Signal Analyzer	Agilent	N9020A	MY46471102	2023-04-06	2024-04-06
22	System DC Power Supply	HP	6612C	US37462767	2023-01-04	2024-01-04



**CTK Co., Ltd.**  
The First Leader of Global Regulatory Compliance

**CTK Co., Ltd.**  
(Ho-dong), 113, Yejik-ro, Cheoin-gu,  
Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2023-01431  
Page (179) / (179) Pages

	<b>Cable</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Serial No.</b>	<b>Check Date</b>
1	RF Cable (Conducted)	Junkosha Inc.	MWX221	1512S151	2023-03-21
2	RF Cable (Conducted)	Junkosha Inc.	MWX221	1512S148	2023-03-21
3	RF Cable (Line Conducted)	Canare Corporation	L-5D2W	N/A	2023-03-06
4	RF Cable (9 kHz - 1 GHz Radiated)	HUBER+SUHNER	SUCOFLEX 104	MY27558/4	2023-03-06
5	RF Cable (9 kHz - 1 GHz Radiated)	HUBER+SUHNER	L-5D2W	N/A	2023-03-06
6	RF Cable (1 GHz - 18 GHz Radiated)	Junkosha Inc.	MWX221	2008S246	2023-04-03
7	RF Cable (1 GHz - 18 GHz Radiated)	Junkosha Inc.	MWX221	J0970749	2023-04-03
8	RF Cable (1 GHz - 18 GHz Radiated)	Sensorview Co., LTD	13A26	TPC2204060007	2023-04-03
9	RF Cable (18 GHz - 40 GHz Radiated)	Sensorview Co., LTD	9S40	TPC2204060009	2022-04-14
10	RF Cable (18 GHz - 40 GHz Radiated)	Sensorview Co., LTD	9A40	TP210713-001	2022-04-14

-END-