


FCC 15.407 WLAN 6GHz Test Report

for

Samsung Electronics Co Ltd

**129 Samsung-ro, Yeongtong-gu Suwon-Si Gyeonggi-do 16677
Korea (Republic Of)**

Product Name : Wi-Fi/BT Transceiver
Model Name : WCF930M
Brand : SAMSUNG
FCC ID : A3LWCF930M



The test report is based on a single evaluation of one sample of the above-mentioned products. It does not imply an assessment of the whole production and does not permit the use of the test lab logo.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.



TABLE OF CONTENTS

Description	Page
TEST REPORT.....	4
1. REVISION RECORD OF TEST REPORT	4
2. SUMMARY OF TEST RESULTS	5
3. GENERAL INFORMATION	6
3.1. Description of Application	6
3.2. Description of EUT	7
3.3. Reference Test Guidance.....	8
3.4. Antenna Information	8
3.5. EUT Specifications Assessed in Current Report	9
3.6. Description of Key Components	10
3.7. Tested Supporting System List.....	12
3.8. Setup Configuration.....	12
3.9. Test Configuration.....	12
3.10. Description of Test Facility	13
3.11. Measurement Uncertainty	13
4. MEASUREMENT EQUIPMENTLIST.....	14
4.1. Contention Based Protocol Measurement	14
5. CONTENTION BASED PROTOCOL	15
5.1. Block Diagram of Test Setup	15
5.2. Specification Limits.....	15
5.3. Test Procedure	17
5.4. Test Results	17
6. DEVIATION TO TEST SPECIFICATIONS	18

APPENDIX A TEST DATA AND PLOTS

APPENDIX B TEST PHOTOGRAPHS



Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

TEST REPORT

Applicant : Samsung Electronics Co Ltd
Manufacturer : Samsung Electronics Co Ltd
Factory : #1 CHEMTRONICS CO., LTD
#2 CHEMTROVINA COMPANY LIMITED
#3 Chengdu Xuguang Technology Co., Ltd.
#4 XUGUANG TECHNOLOGY (VIETAM) COMPANY LIMITED
#5 SJIT CO., LTD.
#6 SJIT VINA Co., Ltd

EUT Description

(1) Product : Wi-Fi/BT Transceiver
(2) Model : WCF930M
(3) Brand : SAMSUNG
(4) Power Supply : DC 5V

Applicable Standards:

47 CFR FCC Part 15 Subpart E

Audix Technology Corp. tested the equipment mentioned in accordance with the requirements set forth in the above standards. Test results indicate that the equipment tested is capable of demonstrating compliance with the requirements as documented within this report.

Audix Technology Corp. does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens and samples.

Date of Report: 2025. 01. 15

Reviewed by:

Sabrina Wang

(Sabrina Wang/Administrator)

Approved by:

Johnny Hsueh

(Johnny Hsueh/Section Manager)



Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

1. REVISION RECORD OF TEST REPORT

Edition No	Issued Date	Revision Summary	Report Number
0	2025. 01. 15	Original Report	EM-F250026



Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

2. SUMMARY OF TEST RESULTS

FCC Part Section(s)	Description	Results
15.407(d)(6)	Contention Based Protocol	PASS
Note: The uncertainties value is not used in determining the result.		

3. GENERAL INFORMATION

3.1. Description of Application

Applicant	Samsung Electronics Co Ltd 129 Samsung-ro, Yeongtong-gu Suwon-Si Gyeonggi-do 16677 Korea (Republic Of)
Manufacturer	Samsung Electronics Co Ltd 129 Samsung-ro, Yeongtong-gu Suwon-Si Gyeonggi-do 16677 Korea (Republic Of)
Factory	#1 CHEMTRONICS CO., LTD 35, Buk-ri, Namsa-myeon, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea #2 CHEMTROVINA COMPANY LIMITE Nhon Trach 2-Loc Khang IZ, Hiep Phuoc Town, Nhon Trach District, Dong Nai Province, Vietnam #3 Chengdu Xuguang Technology Co., Ltd. No.86 2nd Section, Park Road, Longquanyi District, Chengdu City, Sichuan Province, P.R. China #4 XUGUANG TECHNOLOGY (VIETAM) COMPANY LIMITED Factory No. 4, Lot CN1, An Duong Industrial Park, Hong Phong Commune, An Duong District, Hai Phong City, Vietnam #5 SJIT CO., LTD. #54-11, Dongtanhana lgil, Hwaseong-si, Gyeonggi-Do, Korea #6 SJIT VINA Co., Ltd Lox X2, Ho Hai Industrial Zone, Ho Nai 3 Commune, Trang Bom District, Dong Nai Province, Vietnam
Product	Wi-Fi/BT Transceiver
Model	WCF930M
Brand	SAMSUNG

3.2. Description of EUT

Test Model	WCF930M		
Serial Number	2015DE58655E		
Power Rating	DC 5V		
RF Features	Chipset:MT7925AUN WLAN:802.11 a/n/ac/ax/be Chipset: RTL8762EJF Bluetooth: BLE (BT5.2)		
Transmit Type	Chipset:MT7925AUN		
	U-NII Bands		
	802.11a	1T1R	
	802.11n-HT20/40	2T2R	
	802.11ac-VHT20/40/80	2T2R	
	802.11ax-HE20/40/80	2T2R	
	802.11be-EHT20/40/80	2T2R	
	WLAN 6E Bands		
	802.11a	1T1R	
	802.11ax-HE20/40/80/160	2T2R	
	802.11be-EHT20/40/80/160	2T2R	
	Chipset: RTL8762EJF		
	2.4 GHz		
	BLE	1T1R	
Device Category	☐ standard power access point and fixed client device ☒ Low-Power indoor access points ☐ subordinate device operating under the control of an indoor access point ☐ client devices, except for fixed client devices, operating under the control of a standard power access point ☐ client devices operating under the control of an indoor access point		
Sample Status	Trial sample		
Test Sample	Sample No.	Test Item	Firmware
	01	Contention Based Protocol	FC 1.*
Date of Receipt	2024. 10. 22		
Date of Test	2025. 01. 13 ~ 14		
Interface Ports of EUT	None		
Accessories Supplied	None		

Note: Pursuant ISO 17025:2017 section 7.8.2, Audix Technology Corp. does not assume responsibility for all EUT's information including RF features, transmit type, antenna information...etc are provided by customer.

3.3. Reference Test Guidance

ANSI C63.10:2013
KDB 789033 D02 v02r01, KDB 987594 D02 v03

3.4. Antenna Information

Chipset: MT7925AUN					
No.	Antenna Part Number	Manufacture	Antenna Type	UNII Band	Max Gain (dBi)
1.	N3502A-WIFI (ANT 1)	HANYANG	Metal Antenna	UNII 5	0.04
				UNII 6	0.64
				UNII 7	0.64
				UNII 8	-0.92
2	N3502A-WIFI (ANT 2)	HANYANG	Metal Antenna	UNII 5	-0.80
				UNII 6	-1.96
				UNII 7	-0.20
				UNII 8	-0.48

3.5. EUT Specifications Assessed in Current Report

Mode	U-NII Band	Fundamental Range (MHz)	Channel Number
802.11a	5	5975-6375	6
	6	6455	1
	7	6535-6855	5
	8	6935-7095	3
802.11ax-HE20 802.11be-EHT20	5	5955-6415	24
	6	6435-6515	5
	7	6535-6875	18
	8	6895-7115	12
802.11ax-HE40 802.11be-EHT40	5	5965-6405	12
	6	6445-6525	3
	7	6565-6845	8
	8	6885-7085	6
802.11ax-HE80 802.11be-EHT80	5	5985-6385	6
	6	6465	1
	7	6545-6865	5
	8	6945-7025	2
802.11ax-HE160 802.11be-EHT160	5	6025-6345	3
	6	6505	1
	7	6665-6825	2
	8	6985	1

Mode	Modulation	Data Rate (Mbps)
802.11a	OFDM (BPSK/QPSK/16QAM/64QAM)	Up to 54
802.11ax-HE20	OFDMA (BPSK/ QPSK/ 16QAM/ 64QAM/ 256QAM/ 1024QAM)	Up to 287
802.11ax-HE40		Up to 574
802.11ax-HE80		Up to 1201
802.11ax-HE160		Up to 2402
802.11be-EHT20	OFDMA (BPSK/ QPSK/ 16QAM/ 64QAM/ 256QAM/ 1024QAM/ 4096QAM)	Up to 344
802.11be-EHT40		Up to 688
802.11be-EHT80		Up to 1441
802.11be-EHT160		Up to 2882

Channel List								
802.11a								
UNII Band	Channel Number	Frequency (MHz)	UNII Band	Channel Number	Frequency (MHz)	UNII Band	Channel Number	Frequency (MHz)
5	5	5975	6	101	6455	8	197	6935
	21	6055	7	117	6535		213	7015
	37	6135		133	6615		229	7095
	53	6215		149	6695			
	69	6295		165	6775			
	85	6375		181	6855			

Channel List								
802.11ax-HE20/802.11be-EHT20								
UNII Band	Channel Number	Frequency (MHz)	UNII Band	Channel Number	Frequency (MHz)	UNII Band	Channel Number	Frequency (MHz)
5	2	5955	6	97	6435	8	189	6895
	5	5975		101	6455		193	6915
	9	5995		105	6475		197	6935
	13	6015		109	6495		201	6955
	17	6035		113	6515		205	6975
	21	6055	7	117	6535		209	6995
	25	6075		121	6555		213	7015
	29	6095		125	6575		217	7035
	33	6115		129	6595		221	7055
	37	6135		133	6615		225	7075
	41	6155		137	6635		229	7095
	45	6175		141	6655		233	7115
	49	6195		145	6675			
	53	6215		149	6695			
	57	6235		153	6715			
	61	6255		157	6735			
	65	6275		161	6755			
	69	6295		165	6775			
	73	6315		169	6795			
	77	6335		173	6815			
	81	6335		177	6835			
	85	6375		181	6855			
	89	6395		185	6875			
	93	6415						

Channel List								
802.11ax-HE40/802.11be-EHT40								
UNII Band	Channel Number	Frequency (MHz)	UNII Band	Channel Number	Frequency (MHz)	UNII Band	Channel Number	Frequency (MHz)
5	3	5965	6	99	6445	8	187	6885
	11	6005		107	6485		195	6925
	19	6045		115	6525		203	6965
	27	6085	7	123	6565		211	7005
	35	6125		131	6505		219	7045
	43	6165		139	6645		227	7085
	51	6205		147	6685			
	59	6245		155	6725			
	67	6285		163	6765			
	75	6325		171	6805			
	83	6365		179	6845			
	91	6405						

Channel List								
802.11ax-HE80/802.11be-EHT80								
UNII Band	Channel Number	Frequency (MHz)	UNII Band	Channel Number	Frequency (MHz)	UNII Band	Channel Number	Frequency (MHz)
5	7	5985	6	103	6465	8	199	6945
	23	6065	7	119	6545		215	7025
	39	6145		135	6625			
	55	6225		151	6705			
	71	6305		167	6785			
	87	6385		183	6865			

Channel List								
802.11ax-HE160/802.11be-EHT160								
UNII Band	Channel Number	Frequency (MHz)	UNII Band	Channel Number	Frequency (MHz)	UNII Band	Channel Number	Frequency (MHz)
5	15	6025	6	111	6505	8	207	6985
	47	6185	7	143	6665			
	79	6345		175	6825			

3.6. Description of Key Components

None

3.7. Tested Supporting System List

3.7.1. Support Peripheral Unit


No.	Product	Brand	Model No.	Serial No.	Approval
1.	Notebook PC	LG	14Z980	N/A	N/A
2.	Test Jig	N/A	N/A	N/A	N/A
Partner System					
No.	Product	Brand	Model No.	Serial No.	Approval
3.	Notebook PC	DELL	UATIUDE E6440	N/A	N/A
4.	RF Module	SAMSUNG	WCF931M	N/A	N/A
5.	Test Jig	N/A	N/A	N/A	N/A

3.7.2. Cable Lists

No.	Cable Description Of The Above Support Units
1.	---
2.	Data Cable: Unshielded, Undetachable, 0.2 m
3.	---
4.	---
5.	Data Cable: Unshielded, Undetachable, 0.2 m

3.8. Setup Configuration

3.8.1. EUT Configuration for Contention Based Protocol Conducted Test Items

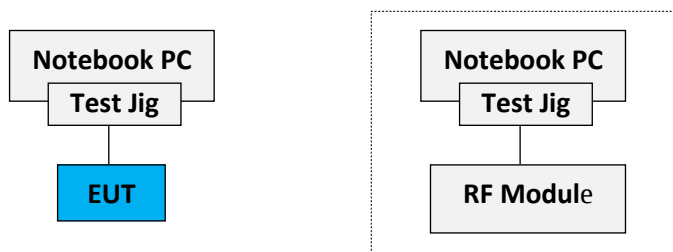

3.9. Test Configuration

Item	Mode	Data Rate	Test Channel
Contention Based Protocol	802.11be-EHT20	EHT0	37/101/149/213
	802.11be-EHT160	EHT0	47/111/143/507

3.10. Description of Test Facility

Name of Test Firm	Audix Technology Corporation / EMC Department No. 491, Zhongfu Rd., Linkou Dist., New Taipei City 244, Taiwan Tel: +886-2-26092133 Fax: +886-2-26099303 Website : www.audixtech.com Contact e-mail: attemc_report@audixtech.com CAB identifier: 5183B
Accreditations	The laboratory is accredited by following organizations under ISO/IEC 17025:2017 (1) NVLAP(USA) NVLAP Lab Code 200077-0 (2) TAF(Taiwan) No. 1724
Test Facilities	FCC OET Designation Number under APEC MRA by NCC is : TW1724 (1) RF Test Room

3.11. Measurement Uncertainty

Test Item	Uncertainty
Contention Based Protocol	$\pm 2.8\%$


4. MEASUREMENT EQUIPMENT LIST

4.1. Contention Based Protocol Measurement

Item	Type	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Interval
1.	Spectrum Analyzer	Keysight	N9030B	MY61330403	2024.12.18	1 Year
2.	Spectrum Analyzer	Keysight	N9010B	MY59071380	2024.03.09	1 Year
3.	MXG RF Vector Signal Generator	Agilent	N5182B	MY53050409	2024.11.29	1 Year
4.	Frequency Extender	KEYSIGHT	N5182BX07	MY59362533	2024.11.29	1 Year
5.	Digital Thermo-Hygro Meter	iMax	HTC-1	RF-03	2024.04.11	1 Year
6.	Attenuator (10dB) X2	Worken	WK0602-10	0120A02208001S	N.C.R	N.C.R
7.	Attenuator (30dB) X1	Worken	WK0602-30	0120A02208002S	N.C.R	N.C.R
8.	CBP Test Unit	Keysight	N.C.R	N.C.R	N.C.R	N.C.R

5. CONTENTION BASED PROTOCOL

5.1. Block Diagram of Test Setup

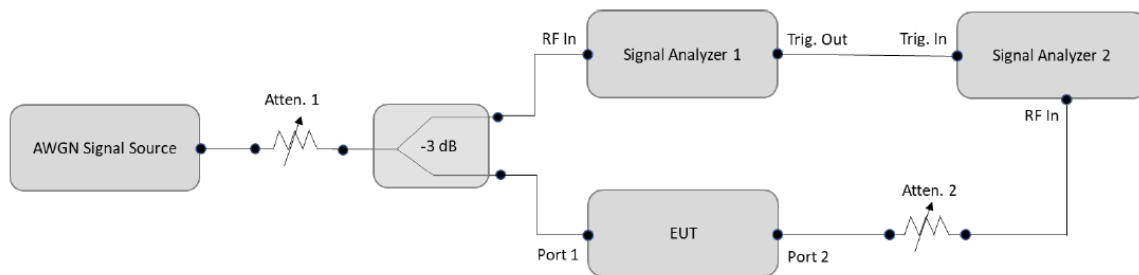

5.2. Specification Limits

Indoor access points, subordinate devices and client devices operating in the 5.925-7.125 GHz band must employ a contention-based protocol

FCC KDB 987594 D02 U-NII 6GHz EMC Measurement v03

Unlicensed low-power indoor devices must detect co-channel radio frequency power that is at least -62 dBm or lower. Upon detection of energy in the band, unlicensed low power indoor devices must vacate the channel (in which incumbent signal is transmitted) and stay off the incumbent channel as long as detected radio frequency power is equal to or greater than the threshold (-62 dBm)¹. The -62 dBm (or lower) threshold is referenced to a 0 dBi antenna gain

To ensure incumbent operations are reliably detected in the band, low power indoor devices must detect RF energy throughout their intended operating channel. For example, an 802.11 device that plans to transmit a 40 MHz- wide signal (on a primary 20 MHz channel and a secondary 20 MHz channel) must detect energy throughout the entire 40 MHz channel. Additionally, low-power indoor devices must detect co-channel energy with 90% or greater certainty.

Table 1. Criteria to determine number of times detection threshold test may be performed

If	Number of Tests	Placement of Incumbent Transmission
$BW_{EUT} \leq BW_{Inc}$	One	Tune incumbent and EUT transmission ($f_{c1} = f_{c2}$)
$BW_{Inc} < BW_{EUT} \leq 2BW_{Inc}$	One	Incumbent transmission is contained within BW_{EUT}
$2BW_{Inc} < BW_{EUT} \leq 4BW_{Inc}$	Twice. Incumbent transmission is contained within BW_{EUT}	Incumbent transmission is located as closely as possible to the lower edge and upper edge, respectively, of the EUT channel
$BW_{EUT} > 4BW_{Inc}$	Three times	Incumbent transmission is located as closely as possible to the lower edge of the EUT channel, in the middle of EUT channel, and as closely as possible to the upper edge of the EUT channel

Where:

BW_{EUT} : Transmission bandwidth of EUT signal

BW_{Inc} : Transmission bandwidth of the simulated incumbent signal (10 MHz wide AWGN signal)

f_{c1} : Center frequency of EUT transmission

f_{c2} : Center frequency of simulated incumbent signal

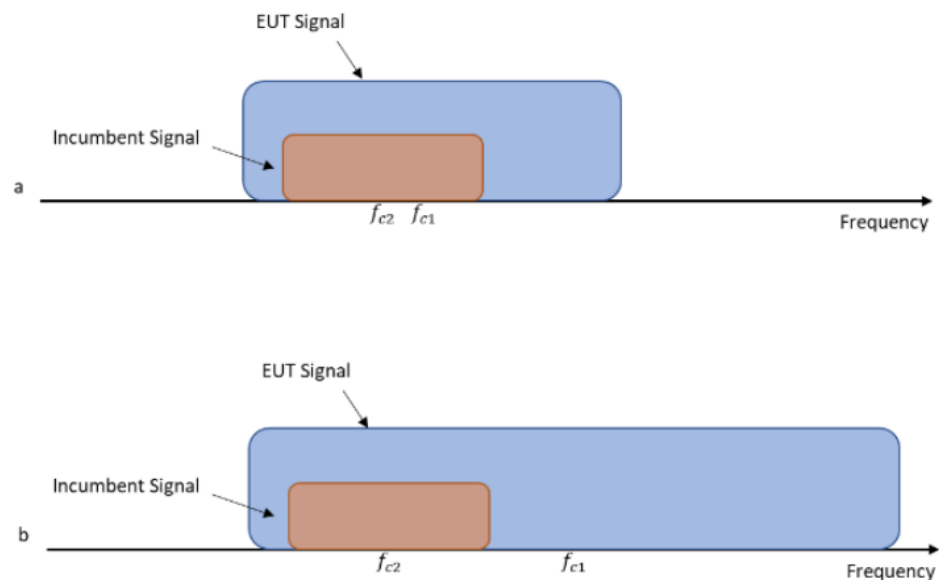


Figure 1. Two possible scenarios where a) center frequency of EUT transmission falls within incumbent's bandwidth, or b) outside of it

5.3. Test Procedure

Following measurement procedure is reference to KDB 987594 D02 U-NII 6GHz EMC Measurement v03:

- (1) To ensure EUT reliably detects an incumbent signal in both scenarios shown in Figure 1, the detection threshold test may be repeated more than once with the incumbent signal (having center frequency f_{c2}) tuned to different center frequencies within the EUT transmission bandwidth. The criteria specified in Table 1 determines how many times the detection threshold test must be performed
- (2) Using an AWGN signal source, generate (but do not transmit, i.e., RF OFF) a 10 MHz-wide AWGN signal. Use Table 1 to determine the center frequency of the 10 MHz AWGN signal relative to the EUT's channel bandwidth and center frequency.
- (3) Monitor the signal analyzer to verify if the AWGN signal has been detected and the EUT has ceased transmission. If the EUT continues to transmit, then incrementally increase the AWGN signal power level until the EUT stops transmitting.
- (4) (Including all losses in the RF paths) Determine and record the AWGN signal power level (at the EUT's antenna port) at which the EUT ceased transmission. Repeat the procedure at least 10 times to verify the EUT can detect an AWGN signal with 90% (or better) level of certainty.
- (5) Refer to Table 1 to determine number of times the detection threshold testing needs to be repeated. If testing is required more than once, then go back to step 2, choose a different center frequency for the AWGN signal and repeat the process.
- (6) The test tool is "LAN test" to let the EUT to transmit with a constant duty cycle.

5.4. Test Results

Please refer to Appendix A



Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

6. DEVIATION TO TEST SPECIFICATIONS

【NONE】



Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

APPENDIX A

Tel: +886 2 26099301
Fax: +886 2 26099303

APPENDIX A

TEST DATA AND PLOTS

(Model: WCF930M)

TABLE OF CONTENTS

A.1	CONTENTION BASED PROTOCOL	2
A.1.1	Contention-based Protocol.....	3
A.1.2	Measurement Plots	5

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

A.1 CONTENTION BASED PROTOCOL

Test Date	2025/01/13 ~ 14	Temp./Hum.	16~17°C/52~53%
Cable Loss	0.50dB	Tested By	Sam Chang
Test Voltage	DC 5V (Via Notebook PC)		

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

A.1.1 Contention-based Protocol

● Contention-based Protocol Threshold Incumbent Signal & Mini. Detection level

Mode 802.11be- EHT20	EUT Frequency (MHz)	AWGN Frequency (MHz)	SG power level (dBm)	Path Loss (dB)	Injected AWGN Power (dBm)	Min. Antenna Gain (Include path loss) (dBi) *Note1	Adjusted Power (dBm)	Detection Limit (dBm)	EUT Tx Status
U-NII Band 5	6135	6135	-30	-42.38	-72.38	-1.96	-70.42	-62	OFF
	6135	6135	-36	-42.38	-78.38	-1.96	-76.42	-62	Minimum
	6135	6135	-39	-42.38	-81.38	-1.96	-79.42	-62	ON
U-NII Band 6	6455	6455	-30	-40.47	-70.47	-1.96	-68.51	-62	OFF
	6455	6455	-36	-40.47	-76.47	-1.96	-74.51	-62	Minimum
	6455	6455	-40	-40.47	-80.47	-1.96	-78.51	-62	ON
U-NII Band 7	6695	6695	-30	-39.72	-69.72	-1.96	-67.76	-62	OFF
	6695	6695	-33	-39.72	-72.72	-1.96	-70.76	-62	Minimum
	6695	6695	-36	-39.72	-75.72	-1.96	-73.76	-62	ON
U-NII Band 8	7015	7015	-32	-41.33	-73.33	-1.96	-71.37	-62	OFF
	7015	7015	-36	-41.33	-77.33	-1.96	-75.37	-62	Minimum
	7015	7015	-38	-41.33	-79.33	-1.96	-77.37	-62	ON
Mode 802.11be- EHT160	EUT Frequency (MHz)	AWGN Frequency (MHz)	SG power level (dBm)	Path Loss (dB)	Injected AWGN Power (dBm)	Min. Antenna Gain (Include path loss) (dBi) *Note1	Adjusted Power (dBm)	Detection Limit (dBm)	EUT Tx Status
U-NII Band 5	6185	6110	-32	-39.44	-71.44	-1.96	-69.48	-62	OFF
		6110	-37	-39.44	-76.44	-1.96	-74.48	-62	Minimum
		6110	-39	-39.44	-78.44	-1.96	-76.48	-62	ON
		6185	-29	-40.42	-69.42	-1.96	-67.46	-62	OFF
		6185	-34	-40.42	-74.42	-1.96	-72.46	-62	Minimum
		6185	-36	-40.42	-76.42	-1.96	-74.46	-62	ON
		6260	-34	-41.76	-75.76	-1.96	-73.8	-62	OFF
		6260	-37	-41.76	-78.76	-1.96	-76.8	-62	Minimum
U-NII Band 6	6505	6430	-36	-40.28	-76.28	-1.96	-74.32	-62	OFF
		6430	-39	-40.28	-79.28	-1.96	-77.32	-62	Minimum
		6430	-41	-40.28	-81.28	-1.96	-79.32	-62	ON
		6505	-29	-38.87	-67.87	-1.96	-65.91	-62	OFF
		6505	-33	-38.87	-71.87	-1.96	-69.91	-62	Minimum
		6505	-35	-38.87	-73.87	-1.96	-71.91	-62	ON
		6580	-31	-41.49	-72.49	-1.96	-70.53	-62	OFF
		6580	-35	-41.49	-76.49	-1.96	-74.53	-62	Minimum
U-NII Band 7	6665	6590	-32	-39	-71	-1.96	-69.04	-62	OFF
		6590	-35	-39	-74	-1.96	-72.04	-62	Minimum
		6590	-37	-39	-76	-1.96	-74.04	-62	ON
		6665	-31	-42.84	-73.84	-1.96	-71.88	-62	OFF
		6665	-36	-42.84	-78.84	-1.96	-76.88	-62	Minimum
		6665	-38	-42.84	-80.84	-1.96	-78.88	-62	ON
		6740	-35	-39.89	-74.89	-1.96	-72.93	-62	OFF
		6740	-39	-39.89	-78.89	-1.96	-76.93	-62	Minimum
U-NII Band 8	6985	6740	-41	-39.89	-80.89	-1.96	-78.93	-62	ON
		6910	-34	-39.53	-73.53	-1.96	-71.57	-62	OFF
		6910	-38	-39.53	-77.53	-1.96	-75.57	-62	Minimum
		6910	-40	-39.53	-79.53	-1.96	-77.57	-62	ON
		6985	-33	-40.97	-73.97	-1.96	-72.01	-62	OFF
		6985	-37	-40.97	-77.97	-1.96	-76.01	-62	Minimum
		6985	-40	-40.97	-80.97	-1.96	-79.01	-62	ON
		7060	-37	-41.97	-78.97	-1.96	-77.01	-62	OFF
U-NII Band 8	6985	7060	-37	-41.97	-78.97	-1.96	-77.01	-62	Minimum
		7060	-38	-41.97	-79.97	-1.96	-78.01	-62	ON

Note 1: the listed Min. gain of EUT was included path loss.

Note 2: Detected level (Adjusted Power) = Injected AWGN Power (dBm) – (Antenna Gain (dBi) + Path loss (dB)) *Note1.

Note 3: The AWGN level is reported for the following conditions:

- OFF = AWGN level at which no transmission is detected, consistently for a minimum period of 10 seconds.
- Minimal: AWGN level at which the system begins to trigger the transmission switch-off, albeit not being kept off consistently.
- ON = AWGN level at which no impact on the transmission is detected, consistently for a minimum period of 10 seconds.

Note 4: The EUT don't support channel puncturing or BW reduction mechanism.

Note 5: Per FCC TCB workshop April 2022, The Injected AWGN power is actual power of AWGN injected into the antenna port.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

● Summary table

Mode 802.11be-EHT20	Centre Frequency (MHz)	Incumbent Frequency (MHz)	1	2	3	4	5	6	7	8	9	10	Detection Possibility (%)	Limit (%)
U-NII Band 5	6135	6135	1	1	1	1	1	1	1	1	1	1	100	90
U-NII Band 6	6455	6455	1	1	1	1	1	1	1	1	1	1	100	90
U-NII Band 7	6695	6695	1	1	1	1	1	1	1	1	1	1	100	90
U-NII Band 8	7015	7015	1	1	1	1	1	1	1	1	1	1	100	90
Mode 802.11be-EHT160	Centre Frequency (MHz)	Incumbent Frequency (MHz)	1	2	3	4	5	6	7	8	9	10	Detection Possibility (%)	Limit (%)
U-NII Band 5	6185	6110	1	1	1	1	1	1	1	1	1	1	100	90
		6185	1	1	1	1	1	1	1	1	1	1	100	90
		6260	1	1	1	1	1	1	1	1	1	1	100	90
U-NII Band 6	6505	6430	1	1	1	1	1	1	1	1	1	1	100	90
		6505	1	1	1	1	1	1	1	1	1	1	100	90
		6580	1	1	1	1	1	1	1	1	1	1	100	90
U-NII Band 7	6665	6590	1	1	1	1	1	1	1	1	1	1	100	90
		6665	1	1	1	1	1	1	1	1	1	1	100	90
		6740	1	1	1	1	1	1	1	1	1	1	100	90
U-NII Band 8	6985	6910	1	1	1	1	1	1	1	1	1	1	100	90
		6985	1	1	1	1	1	1	1	1	1	1	100	90
		7060	1	1	1	1	1	1	1	1	1	1	100	90

Note: CBP Detection Trials (1= Detection, 0= No Detection)

A.1.2 Measurement Plots

