

ELECTROMAGNETIC EMISSION COMPLIANCE REPORT FOR LOW-POWER, NON-LICENSED TRANSMITTER


Test Report No. : OT-18O-RWD-077
AGR No. : A188A-336
Applicant : Samsung Electronics Co Ltd
Address : 19 Chapin Rd., Building D, Pine Brook, New Jersey, 07058, United States
Manufacturer : Samsung Electronics Co Ltd
Address : Maetan dong 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do 16677, Korea
Type of Equipment : Wi-Fi/BT Transceiver
FCC ID. : A3LWCP730M
Model Name : WCP730M
Serial number : N/A
Total page of Report : 82 pages (including this page)
Date of Incoming : September 28, 2018
Date of issue : October 31, 2018

SUMMARY

The equipment complies with the regulation; *FCC PART 15 SUBPART C Section 15.247*
 This test report only contains the result of a single test of the sample supplied for the examination.
 It is not a generally valid assessment of the features of the respective products of the mass-production.

Reviewed by: 

 Ki-Hong, Nam / Chief Engineer
 ONETECH Corp.

Approved by: 

 Keun-Young, Choi / Vice President
 ONETECH Corp.

CONTENTS

	PAGE
1. VERIFICATION OF COMPLIANCE	6
2. TEST SUMMARY	8
2.1 TEST ITEMS AND RESULTS	8
2.2 ADDITIONS, DEVIATIONS, EXCLUSIONS FROM STANDARDS	8
2.3 RELATED SUBMITTAL(S) / GRANT(S)	8
2.4 PURPOSE OF THE TEST	8
2.5 TEST METHODOLOGY	8
2.6 TEST FACILITY	8
3. GENERAL INFORMATION	9
3.1 PRODUCT DESCRIPTION	9
3.2 ALTERNATIVE TYPE(S)/MODEL(S); ALSO COVERED BY THIS TEST REPORT	13
4. EUT MODIFICATIONS	13
5. SYSTEM TEST CONFIGURATION	14
5.1 JUSTIFICATION	14
5.2 PERIPHERAL EQUIPMENT	14
5.3 MODE OF OPERATION DURING THE TEST	14
5.4 CONFIGURATION OF TEST SYSTEM	15
5.5 ANTENNA REQUIREMENT	15
6. PRELIMINARY TEST	16
6.1 AC POWER LINE CONDUCTED EMISSIONS TESTS	16
6.2 GENERAL RADIATED EMISSIONS TESTS	16
7. MINIMUM 20 DB BANDWIDTH	17
7.1 OPERATING ENVIRONMENT	17
7.2 TEST SET-UP	17
7.3 TEST EQUIPMENT USED	17
7.4 TEST DATA FOR 1 MBPS	18
7.5 TEST DATA FOR 2 MBPS	20
7.6 TEST DATA FOR 3 MBPS	22
8. HOPPING FREQUENCY SEPARATION	24
8.1 OPERATING ENVIRONMENT	24
8.2 TEST SET-UP	24

8.3 TEST EQUIPMENT USED	24
8.4 TEST DATA FOR 1 MBPS	25
8.5 TEST DATA FOR 2 MBPS	26
8.6 TEST DATA FOR 3 MBPS	27
9. NUMBER OF HOPPING CHANNELS	28
9.1 OPERATING ENVIRONMENT	28
9.2 TEST SET-UP	28
9.3 TEST EQUIPMENT USED	28
9.4 TEST DATA FOR 1 MBPS	29
9.5 TEST DATA FOR 2 MBPS	32
9.6 TEST DATA FOR 3 MBPS	35
10. TIME OF OCCUPANCY	38
10.1 OPERATING ENVIRONMENT	38
10.2 TEST SET-UP	38
10.3 TEST EQUIPMENT USED	38
10.4 TEST DATA FOR 1 MBPS	39
10.5 TEST DATA FOR 2 MBPS	42
10.6 TEST DATA FOR 3 MBPS	45
11. MAXIMUM PEAK OUTPUT POWER	48
11.1 OPERATING ENVIRONMENT	48
11.2 TEST SET-UP	48
11.3 TEST EQUIPMENT USED	48
11.4 TEST DATA FOR 1 MBPS	49
11.5 TEST DATA FOR 2 MBPS	51
11.6 TEST DATA FOR 3 MBPS	53
12. 100 KHZ BANDWIDTH OUTSIDE THE FREQUENCY BAND	55
12.1 OPERATING ENVIRONMENT	55
12.2 TEST SET-UP FOR CONDUCTED MEASUREMENT	55
12.3 TEST SET-UP FOR RADIATED MEASUREMENT	55
12.4 TEST EQUIPMENT USED	55
12.5 TEST DATA FOR CONDUCTED EMISSION	56
12.5.1 Test data for 1 Mbps	56
12.5.2 Test data for 2 Mbps	61
12.5.3 Test data for 3 Mbps	66
12.6 TEST DATA FOR TRANSMITTING MODE RADIATED EMISSION	71
12.6.1 Radiated Emission which fall in the Restricted Band	71

12.6.2 Spurious & Harmonic Radiated Emission above 1 GHz.....	74
13. RADIATED EMISSION TEST	77
13.1 OPERATING ENVIRONMENT	77
13.2 TEST SET-UP	77
13.3 TEST EQUIPMENT USED.....	77
13.4 TEST DATA FOR 30 MHz ~ 1 000 MHz	78
13.5 TEST DATA FOR BELOW 30 MHz	79
13.6 TEST DATA FOR ABOVE 1 GHz	79
14. CONDUCTED EMISSION TEST.....	80
14.1 OPERATING ENVIRONMENT	80
14.2 TEST SET-UP	80
14.3 TEST EQUIPMENT USED.....	80
14.4 TEST DATA.....	81

Revision History

Rev. No.	Issue Report No.	Issued Date	Revisions	Section Affected
0	OT-18O-RWD-077	2018.10.31	Initial Release	All

1. VERIFICATION OF COMPLIANCE

Applicant : Samsung Electronics Co Ltd

Address : 19 Chapin Rd., Building D, Pine Brook, New Jersey, 07058, United States

Manufacturer : Samsung Electronics Co Ltd

Address : Maetan dong 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do 16677, Korea

Factory 1 : WISOL HA NOI COMPANY LIMITED

Address : No. 26, Street 05, Vsip Bac Ninh Industrial Park, Phu Chan Communt, Tu Son Town, Bac Ninh Province, Viet Nam.

Factory 2 : Shenzhen Zowee Technology Co., Ltd.

Address : Floor5 & 6, Block 5, Science & Technology Park of Privately Owned Enterprises, Pingshan, Xili, Nanshan District, Shenzhen, Guangdong Province, P.R. China

Contact Person : minhyung cho / Senior Engineer

Telephone No. : +82-31-277-2688

FCC ID : A3LWCP730M

Model Name : WCP730M

Brand Name : 

Serial Number : N/A

Date : October 31, 2018

EQUIPMENT CLASS	DSS – PART 15 SPREAD SPECTRUM TRANSMITTER
E.U.T. DESCRIPTION	Modular Transmitter, Wi-Fi/BT Transceiver
THIS REPORT CONCERNS	Original Grant
MEASUREMENT PROCEDURES	ANSI C63.10: 2013
TYPE OF EQUIPMENT TESTED	Pre-Production
KIND OF EQUIPMENT AUTHORIZATION REQUESTED	Certification
EQUIPMENT WILL BE OPERATED UNDER FCC RULES PART(S)	FCC PART 15 SUBPART C Section 15.247
Modifications on the Equipment to Achieve Compliance	None
Final Test was Conducted On	3 m, Semi Anechoic Chamber

-. The above equipment was tested by ONETECH Corp. for compliance with the requirement set forth in the FCC Rules and Regulations. This said equipment in the configuration described in this report, shows the maximum emission levels emanating from equipment are within the compliance requirements.

2. TEST SUMMARY

2.1 Test items and results

SECTION	TEST ITEMS	RESULTS
15.247 (a) (1)	Carrier Frequency Separation	Met the Limit / PASS
15.247 (a) (1) (iii)	Minimum Number of Hopping Channels	Met the Limit / PASS
15.247 (a) (1) (iii)	Average Time of Occupancy	Met the Limit / PASS
15.247 (b) (1)	Maximum Peak Conducted Output Power	Met the Limit / PASS
15.247 (d)	100 kHz Bandwidth Outside the Frequency Band	Met the Limit / PASS
15.247 (d)	Radiated Emission which fall in the Restricted Band	Met the Limit / PASS
15.209	Radiated Emission Limits, General Requirement	Met the Limit / PASS
15.207	Conducted Limits	Met the Limit / PASS
15.203	Antenna Requirement	Met requirement / PASS

2.2 Additions, deviations, exclusions from standards

No additions, deviations or exclusions have been made from standard.

2.3 Related Submittal(s) / Grant(s)

Original submittal only

2.4 Purpose of the test

To determine whether the equipment under test fulfills the requirements of the regulation stated in FCC PART 15 SUBPART C Section 15.247.

2.5 Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10: 2013. Radiated testing was performed at a distance of 3 m from EUT to the antenna.

2.6 Test Facility

The Onetech Corp. has been designated to perform equipment testing in compliance with ISO/IEC 17025.

The Electromagnetic compatibility measurement facilities are located at 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea

-. Site Filing:

VCCI (Voluntary Control Council for Interference) – Registration No. R-4112/ C-14617/ G-10666 / T-1842

IC (Industry Canada) – Registration No. Site# 3736A-3

-. Site Accreditation:

KOLAS (Korea Laboratory Accreditation Scheme) - Accreditation NO. KT085

FCC (Federal Communications Commission) - Accreditation No. KR0013

RRA (Radio Research Agency) – Designation No. KR0013

3. GENERAL INFORMATION

3.1 Product Description

The Samsung Electronics Co Ltd, Model WCP730M (referred to as the EUT in this report) is a Wi-Fi/BT Transceiver. The product specification described herein was obtained from product data sheet or user’s manual.

DEVICE TYPE	Wi-Fi/BT Transceiver	
Temperature Range	-20 °C ~ 50 °C	
OPERATING FREQUENCY	Bluetooth LE	2 402 MHz ~ 2 480 MHz
	Bluetooth	2 402 MHz ~ 2 480 MHz
	WLAN 2.4 GHz	2 412 MHz ~ 2 472 MHz (802.11b/g/n(HT20))
		2 422 MHz ~ 2 462 MHz (802.11n(HT40))
	5 150 MHz ~ 5 250 MHz Band	5 180 MHz ~ 5 240 MHz (802.11a/n(HT20)/ac(VHT20))
		5 190 MHz ~ 5 230 MHz (802.11n(HT40)/ac(VHT40))
		5 210 MHz (802.11ac(VHT80))
	5 250 MHz ~ 5 350 MHz Band	5 260 MHz ~ 5 320 MHz (802.11a/n(HT20)/ac(VHT20))
		5 270 MHz ~ 5 310 MHz (802.11n(HT40)/ac(VHT40))
		5 290 MHz (802.11ac(VHT80))
	5 470 MHz ~ 5 725 MHz Band	5 500 MHz ~ 5 700 MHz (802.11a/n(HT20)/ac(VHT20))
		5 510 MHz ~ 5 670 MHz (802.11n(HT40)/ac(VHT40))
		5 530 MHz (802.11ac(VHT80))
	5 725 MHz ~ 5 850 MHz Band	5 745 MHz ~ 5 825 MHz (802.11a/n(HT20)/ac(VHT20))
5 755 MHz ~ 5 795 MHz (802.11n(HT40)/ac(VHT40))		
5 775 MHz (802.11ac(VHT80))		
MODULATION TYPE	Bluetooth LE	GFSK
	Bluetooth	GFSK for 1Mbps, $\pi/4$ -DQPSK for 2Mbps, 8-DPSK for 3Mbps
	WLAN 2.4 GHz	802.11b: DSSS Modulation(DBPSK/DQPSK/CCK)
		802.11g/n(HT20)/n(HT40): OFDM Modulation(BPSK/QPSK/16QAM/64QAM)
WLAN 5 GHz	802.11a/n(HT20)/n(HT40)/ac(VHT80): OFDM Modulation(BPSK/QPSK/16QAM/64QAM)	

RF OUTPUT POWER'	Bluetooth LE	1 Mbps	10.50 dBm	
		2 Mbps	10.33 dBm	
	Bluetooth	1 Mbps	10.43 dBm	
		2 Mbps	10.09 dBm	
		3 Mbps	10.47 dBm	
	WLAN 2.4 GHz	Antenna 0	19.96 dBm(802.11b)	
			16.85 dBm(802.11g)	
			15.62 dBm(802.11n_HT20)	
			13.50 dBm(802.11n_HT40)	
		Antenna 1	20.46 dBm(802.11b)	
17.04 dBm(802.11g)				
Multiple Antenna	15.98 dBm(802.11n_HT20)			
	13.94 dBm(802.11n_HT40)			
	19.96 dBm(802.11g)			
		18.80 dBm(802.11n_HT20)		
		16.74 dBm(802.11n_HT40)		

RF OUTPUT POWER	5 150 MHz ~ 5 250 MHz Band	Antenna 0	15.82 dBm(802.11a) 14.61 dBm(802.11n_HT20) 13.23 dBm(802.11n_HT40) 10.86 dBm(802.11ac_VHT80)
		Antenna 1	16.06 dBm(802.11a) 15.02 dBm(802.11n_HT20) 13.42 dBm(802.11n_HT40) 10.89 dBm(802.11ac_VHT80)
		Multiple Antenna	18.95 dBm(802.11a) 17.79 dBm(802.11n_HT20) 16.34 dBm(802.11n_HT40) 13.89 dBm(802.11ac_VHT80)
	5 250 MHz ~ 5 350 MHz Band	Antenna 0	16.01 dBm(802.11a) 14.93 dBm(802.11n_HT20) 13.31 dBm(802.11n_HT40) 11.24 dBm(802.11ac_VHT80)
		Antenna 1	15.89 dBm(802.11a) 14.88 dBm(802.11n_HT20) 13.08 dBm(802.11n_HT40) 10.58 dBm(802.11ac_VHT80)
		Multiple Antenna	18.96 dBm(802.11a) 17.92 dBm(802.11n_HT20) 16.21 dBm(802.11n_HT40) 13.93 dBm(802.11ac_VHT80)

RF OUTPUT POWER	5 470 MHz ~ 5 725 MHz Band	Antenna 0	16.35 dBm(802.11a) 15.41 dBm(802.11n_HT20) 13.81 dBm(802.11n_HT40) 11.57 dBm(802.11ac_VHT80)
		Antenna 1	16.02 dBm(802.11a) 15.08 dBm(802.11n_HT20) 13.06 dBm(802.11n_HT40) 10.82 dBm(802.11ac_VHT80)
		Multiple Antenna	18.97 dBm(802.11a) 18.07 dBm(802.11n_HT20) 16.46 dBm(802.11n_HT40) 14.22 dBm(802.11ac_VHT80)
	5 725 MHz ~ 5 850 MHz Band	Antenna 0	16.73 dBm(802.11a) 15.41 dBm(802.11n_HT20) 13.58 dBm(802.11n_HT40) 11.53 dBm(802.11ac_VHT80)
		Antenna 1	16.23 dBm(802.11a) 15.15 dBm(802.11n_HT20) 13.41 dBm(802.11n_HT40) 11.63 dBm(802.11ac_VHT80)
		Multiple Antenna	19.28 dBm(802.11a) 18.25 dBm(802.11n_HT20) 16.47 dBm(802.11n_HT40) 14.59 dBm(802.11ac_VHT80)
MODULATION TYPE	Bluetooth LE	GFSK	
	Bluetooth	GFSK for 1Mbps, $\pi/4$ -DQPSK for 2Mbps, 8-DPSK for 3Mbps	
	WLAN 2.4 G	DSSS Modulation(DBPSK/DQPSK/CCK) OFDM Modulation(BPSK/QPSK/16QAM/64QAM)	
	WLAN 5 G	OFDM Modulation(BPSK/QPSK/16QAM/64QAM)	

ANTENNA TYPE	Metal Antenna			
ANTENNA GAIN	Bluetooth LE	-4.60 dBi		
	Bluetooth	-4.60 dBi		
	WLAN 2.4 GHz	Antenna 0	0.71 dBi	
		Antenna 1	2.56 dBi	
		Multiple Antenna	4.74 dBi	
	5 150 MHz ~ 5 250 MHz Band	Antenna 0	3.47 dBi	
		Antenna 1	2.98 dBi	
		Multiple Antenna	6.24 dBi	
	5 250 MHz ~ 5 350 MHz Band	Antenna 0	1.64 dBi	
		Antenna 1	-0.67 dBi	
		Multiple Antenna	3.65 dBi	
	5 470 MHz ~ 5 725 MHz Band	Antenna 0	1.95 dBi	
		Antenna 1	-0.49 dBi	
		Multiple Antenna	3.91 dBi	
	5 725 MHz ~ 5 850 MHz Band	Antenna 0	0.14 dBi	
		Antenna 1	-0.92 dBi	
		Multiple Antenna	2.65 dBi	
	List of each Osc. or crystal Freq.(Freq. >= 1 MHz)		40 MHz	

3.2 Alternative type(s)/model(s); also covered by this test report.

-. None

4. EUT MODIFICATIONS

-. None

5. SYSTEM TEST CONFIGURATION

5.1 Justification

This device was configured for testing in a typical way as a normal customer is supposed to be used. During the test, the following components were installed inside of the EUT.

DEVICE TYPE	MANUFACTURER	MODEL/PART NUMBER	FCC ID
Main Board	Samsung Electronics Co Ltd	WCP730M	N/A

5.2 Peripheral equipment

Defined as equipment needed for correct operation of the EUT, but not considered as tested:

Model	Manufacturer	Description	Connected to
WCP730M	Samsung Electronics Co Ltd	Wi-Fi/BT Transceiver (EUT)	
HP Pavilion g series	HP	Notebook PC	EUT
PPP009C	LIE-ON TECHNOLOGY (CHANGZHOU)CO.,LTD.	AC Adapter	

5.3 Mode of operation during the test

For the testing, software used to control the EUT for staying in continuous transmitting is programmed.

For final testing, the EUT was set at 2 402 MHz, 2 441MHz, and 2 480 MHz to get a maximum emission levels from the EUT. The EUT was moved throughout the XY, XZ, and YZ planes and the worst case is “XZ” axis, but the worst data was recorded in this report.

5.4 Configuration of Test System

Line Conducted Test: The EUT was connected to USB and the power of USB was connected to Notebook PC. All supporting equipments were connected to another LISN. Preliminary Power line Conducted Emission test was performed by using the procedure in ANSI C63.10: 2013 to determine the worse operating conditions.

Radiated Emission Test: Preliminary radiated emissions test were conducted using the procedure in ANSI C63.10: 2013 to determine the worse operating conditions. Final radiated emission tests were conducted at 3 meter Semi Anechoic Chamber.

The turntable was rotated through 360 degrees and the EUT was tested by positioned three orthogonal planes to obtain the highest reading on the field strength meter. Once maximum reading was determined, the search antenna was raised and lowered in both vertical and horizontal polarization.

5.5 Antenna Requirement

For intentional device, according to section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Antenna Construction:

The antenna of the EUT is a Metal Antenna on the main board in the EUT, so no consideration of replacement by the user.

6. PRELIMINARY TEST

6.1 AC Power line Conducted Emissions Tests

During Preliminary Test, the following operating mode was investigated.

Operation Mode	The Worse operating condition (Please check one only)
Transmitting Mode	X

6.2 General Radiated Emissions Tests

During Preliminary Test, the following operating mode was investigated.

Operation Mode	The Worse operating condition (Please check one only)
Transmitting Mode	X


7. MINIMUM 20 dB BANDWIDTH

7.1 Operating environment

Temperature : 25 °C
 Relative humidity : 46 % R.H.

7.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The resolution bandwidth is set to 10 kHz, and peak detection was used. The 20 dB bandwidth is defined as the total spectrum over which the power is higher than the peak power minus 20 dB.

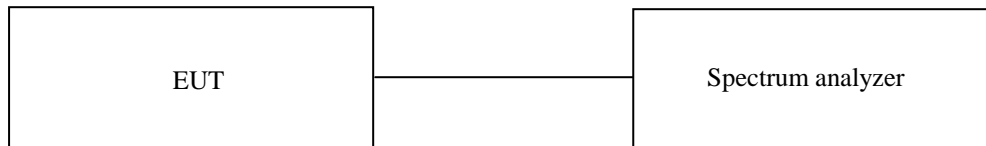

7.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ - FSV40	Rohde & Schwarz	Signal Analyzer	101009	Mar. 14, 2018 (1Y)

All test equipment used is calibrated on a regular basis.


7.4 Test data for 1 Mbps


-. Test Date : September 28, 2018 ~ October 24, 2018

CHANNEL	FREQUENCY (MHz)	20 dB Bandwidth (kHz)
Low	2 402.00	924.10
Middle	2 441.00	924.10
High	2 480.00	924.10




Tested by: Tae-Ho, Kim / Senior Manager

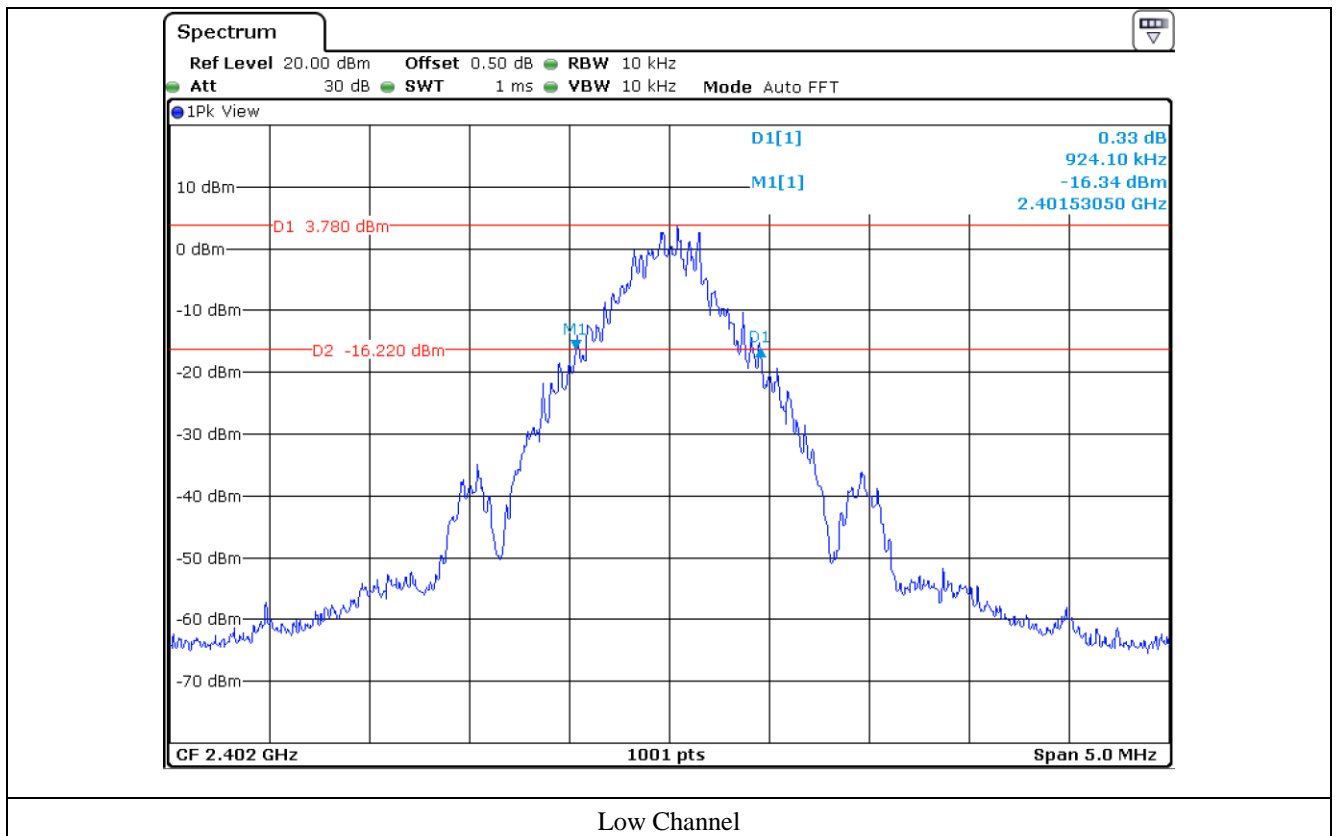

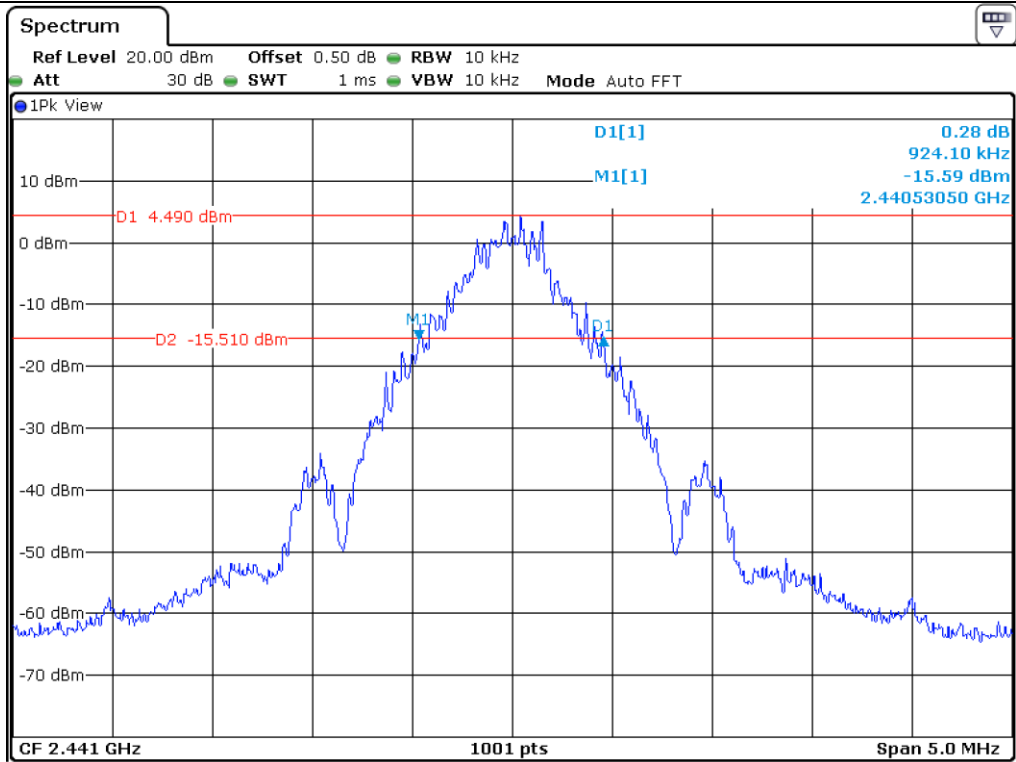

Middle Channel

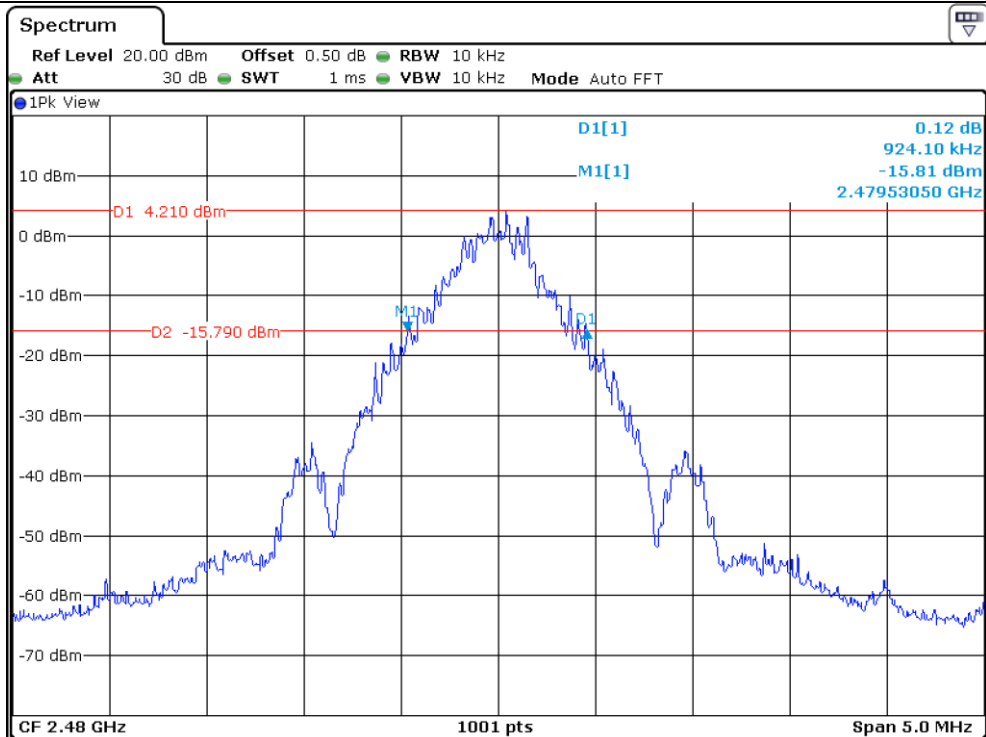

High Channel


7.5 Test data for 2 Mbps


-. Test Date : September 28, 2018 ~ October 24, 2018

CHANNEL	FREQUENCY (MHz)	20 dB Bandwidth (kHz)
Low	2 402.00	1 228.80
Middle	2 441.00	1 228.80
High	2 480.00	1 228.80




Tested by: Tae-Ho, Kim / Senior Manager

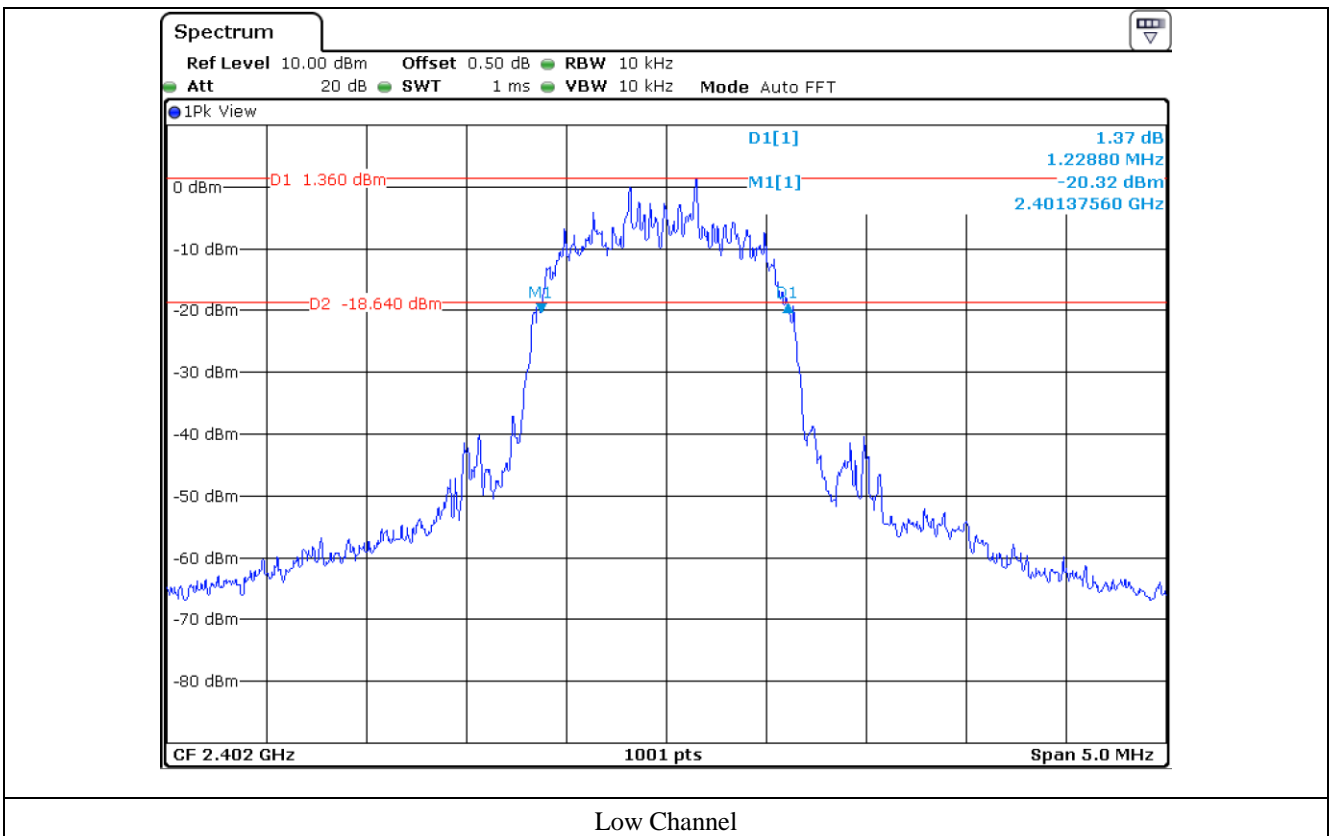

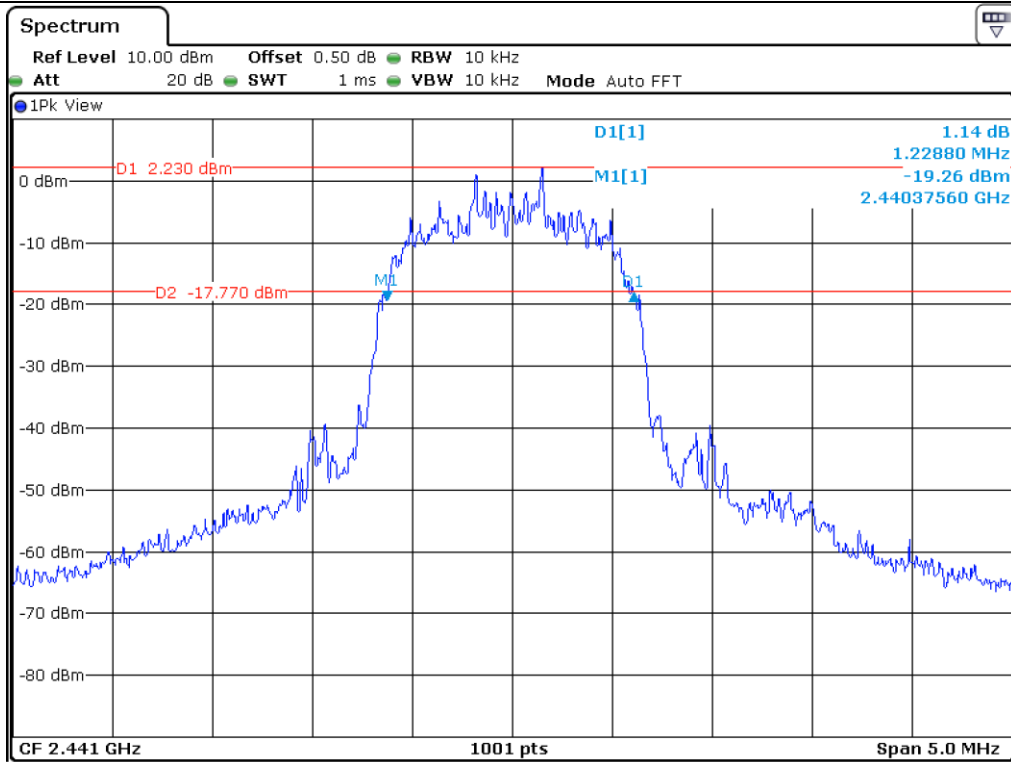

Middle Channel

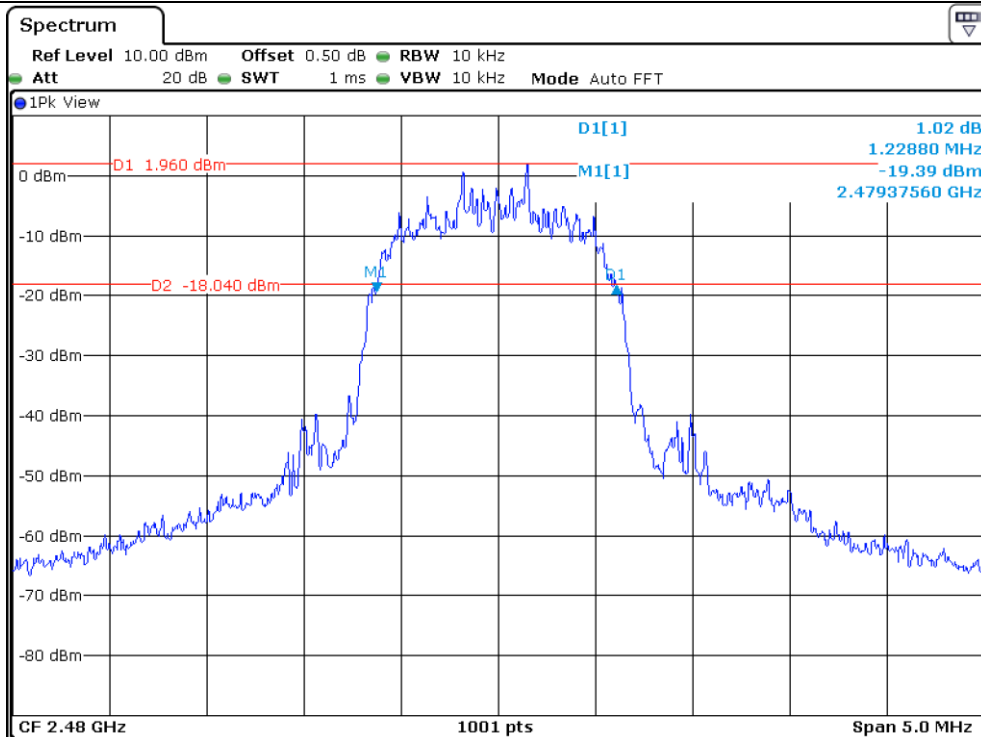

High Channel


7.6 Test data for 3 Mbps


-. Test Date : September 28, 2018 ~ October 24, 2018

CHANNEL	FREQUENCY (MHz)	20 dB Bandwidth (kHz)
Low	2 402.00	1 258.70
Middle	2 441.00	1 258.70
High	2 480.00	1 257.70




Tested by: Tae-Ho, Kim / Senior Manager

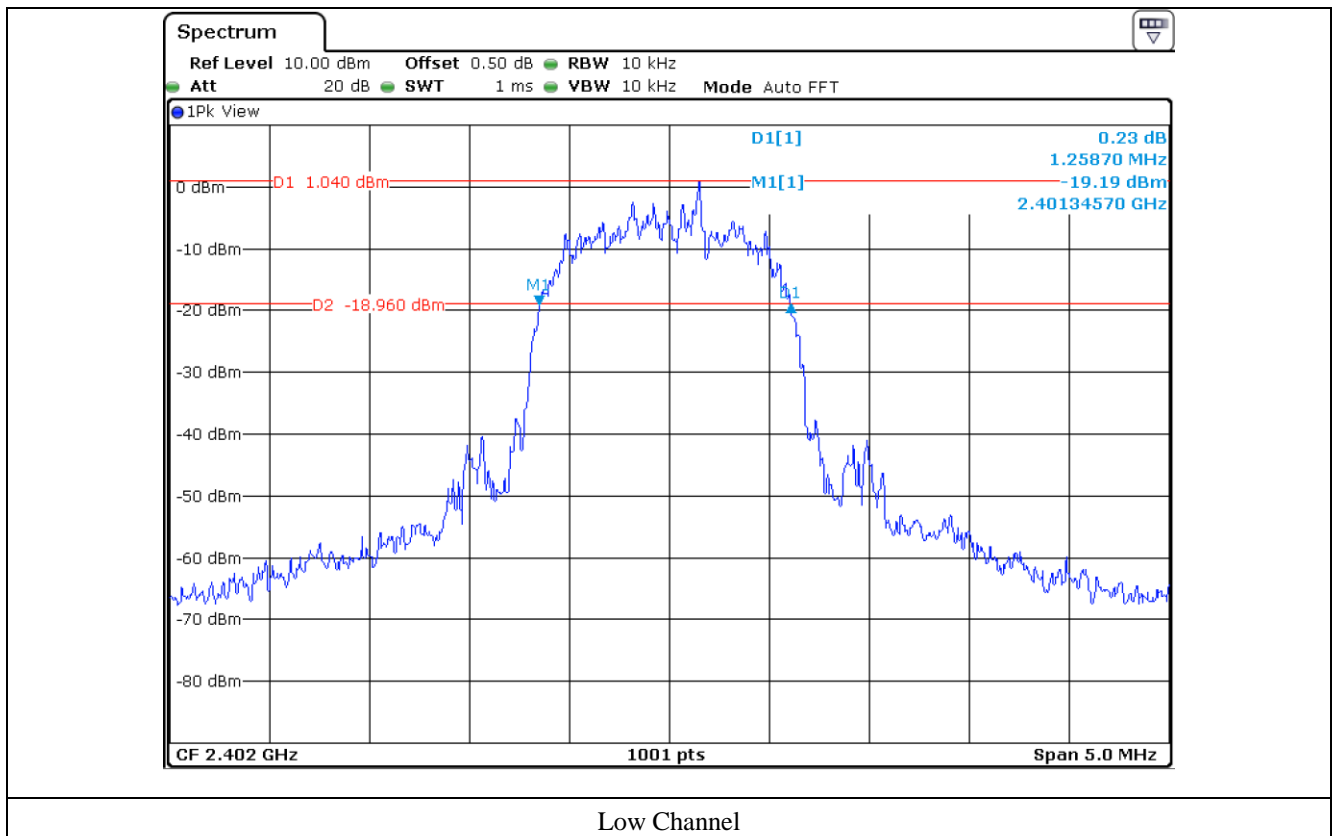

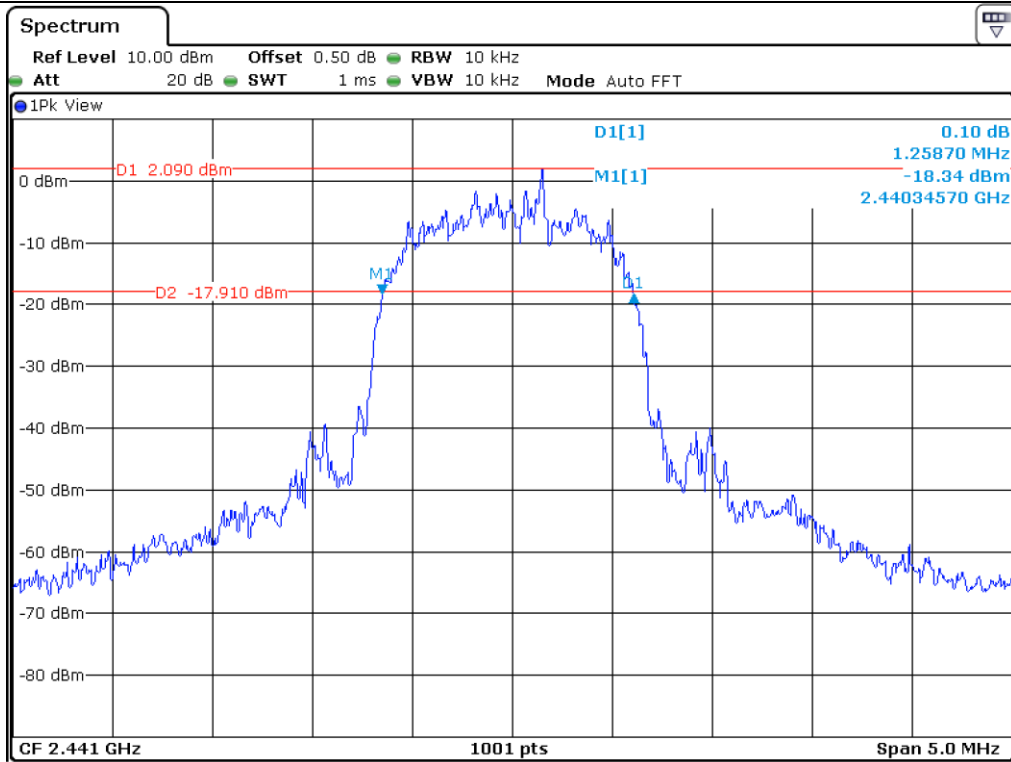

Middle Channel

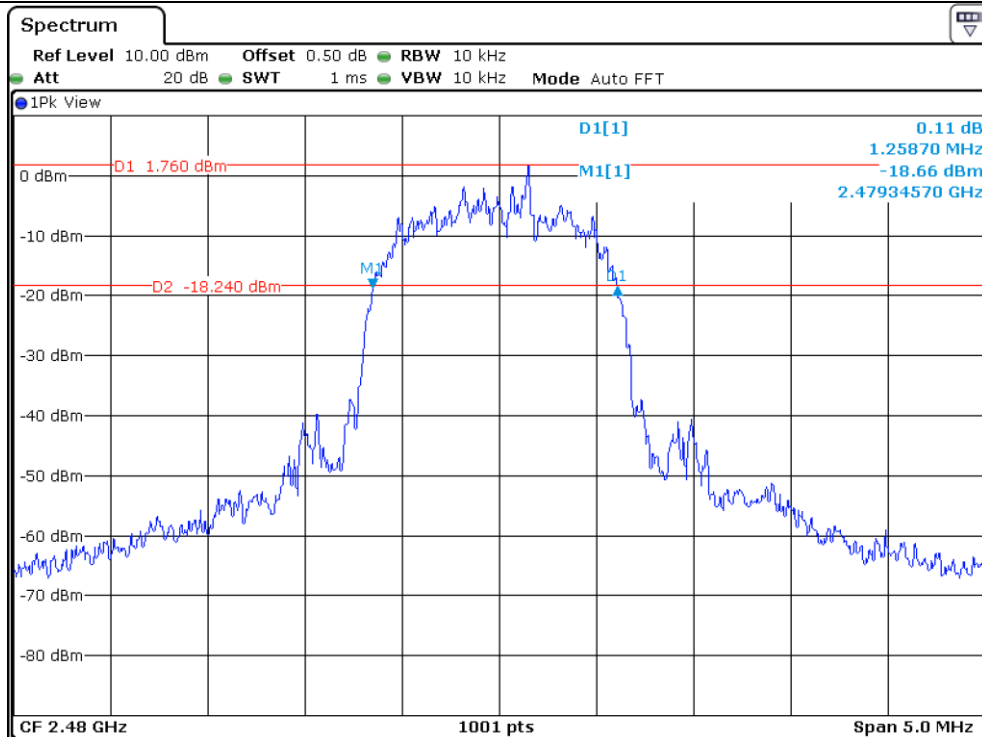

High Channel


8. HOPPING FREQUENCY SEPARATION

8.1 Operating environment

Temperature : 25 °C
 Relative humidity : 46 % R.H.

8.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The frequency span is set to 10 MHz. The analyzer is set to peak hold then a pseudo-random hopping sequence of the transmitter is captured. The mark delta function was used to measure the frequency separation between two adjacent hopping channels.

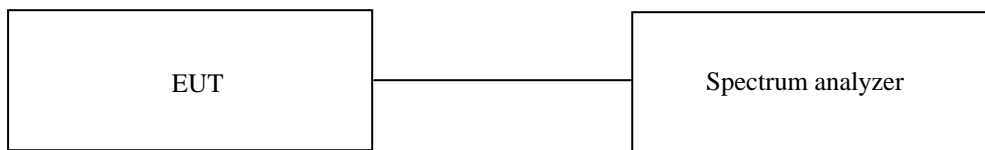

8.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ - FSV40	Rohde & Schwarz	Signal Analyzer	101009	Mar. 14, 2018 (1Y)

All test equipment used is calibrated on a regular basis.

8.4 Test data for 1 Mbps


- Test Date : September 28, 2018 ~ October 24, 2018

- Test Result : Pass

MEASURED VLAUE (kHz)	Two-third of 20 dB Bandwidth (kHz)	LIMIT
999.00	616.07	Separated by a minimum of 25 kHz



Tested by: Tae-Ho, Kim / Senior Manager

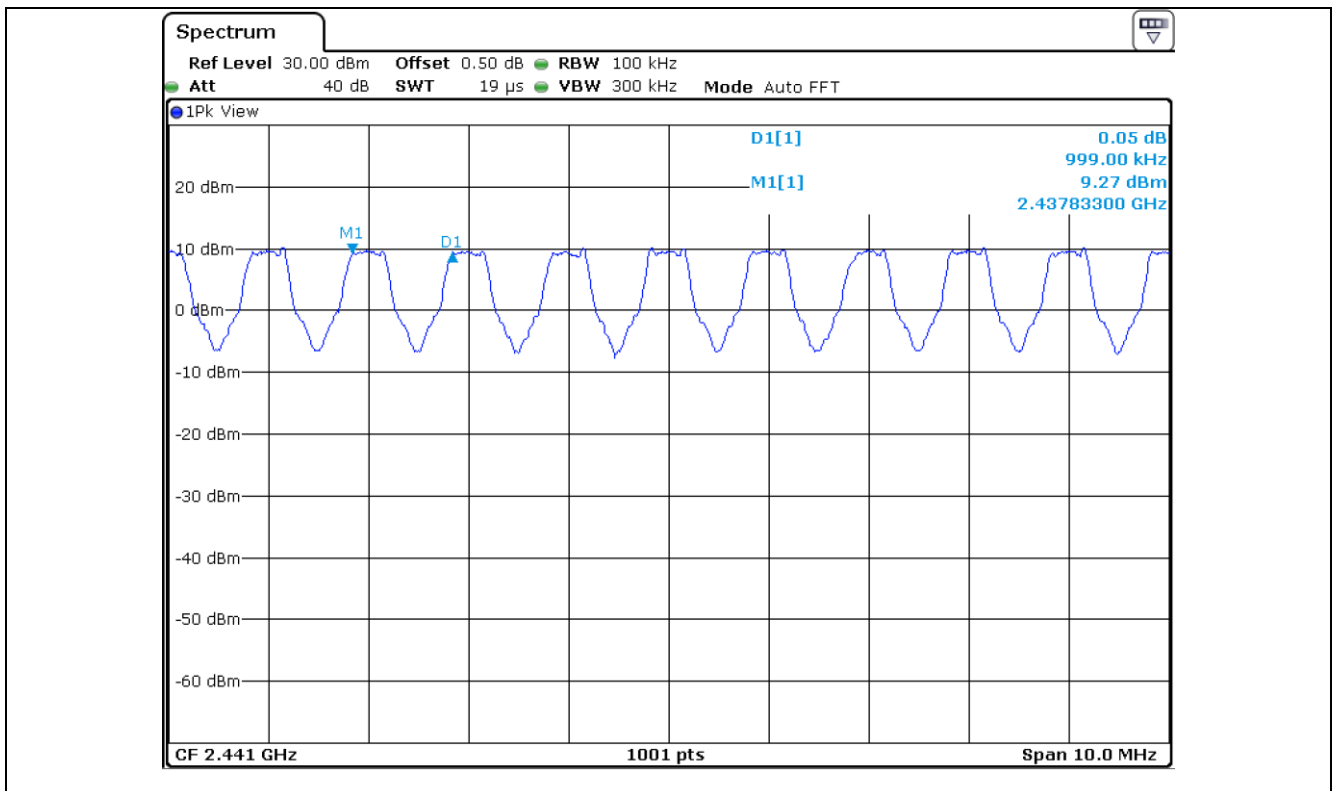

8.5 Test data for 2 Mbps


- Test Date : September 28, 2018 ~ October 24, 2018

- Test Result : Pass

MEASURED VLAUE (kHz)	Two-third of 20 dB Bandwidth (kHz)	LIMIT
999.00	819.20	Separated by a minimum of 25 kHz



Tested by: Tae-Ho, Kim / Senior Manager

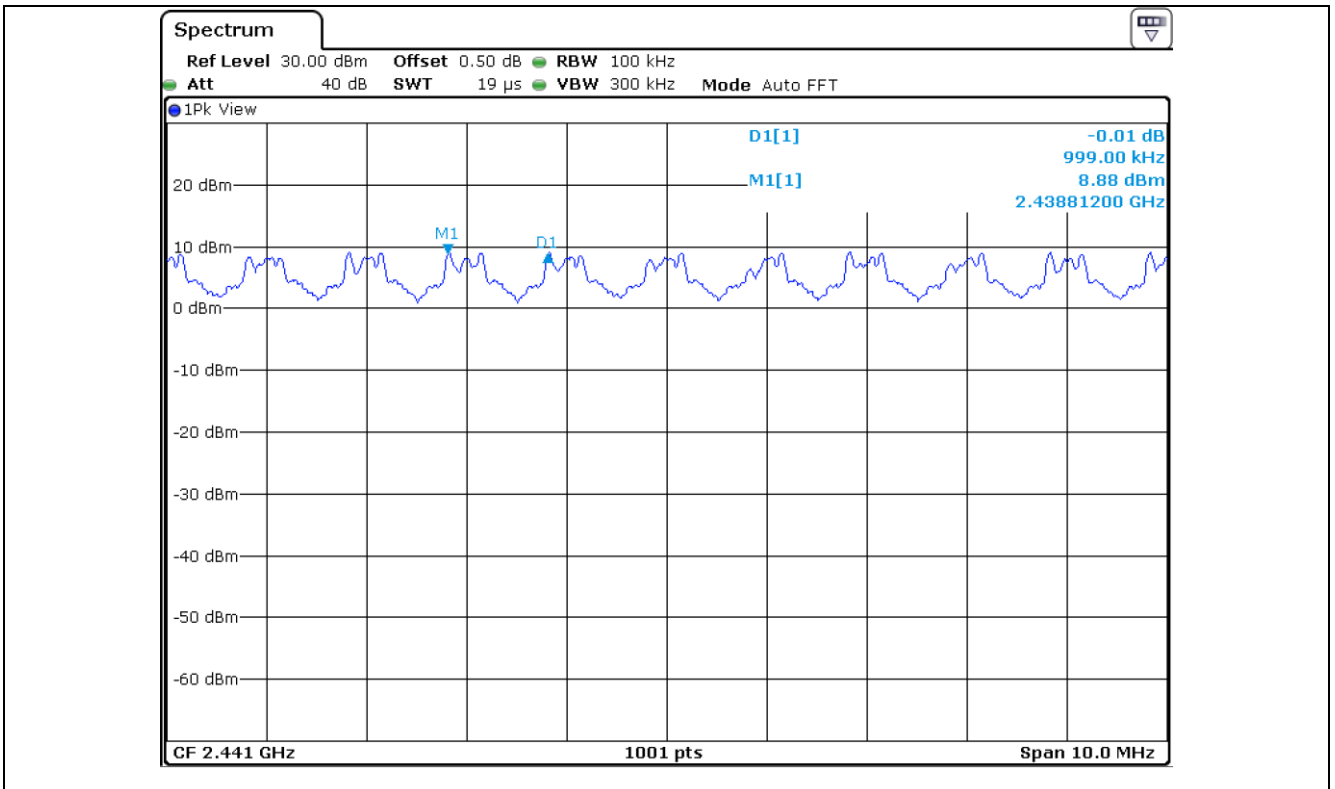

8.6 Test data for 3 Mbps


- Test Date : September 28, 2018 ~ October 24, 2018

- Test Result : Pass

MEASURED VLAUE (kHz)	Two-third of 20 dB Bandwidth (kHz)	LIMIT
999.00	839.13	Separated by a minimum of 25 kHz



Tested by: Tae-Ho, Kim / Senior Manager

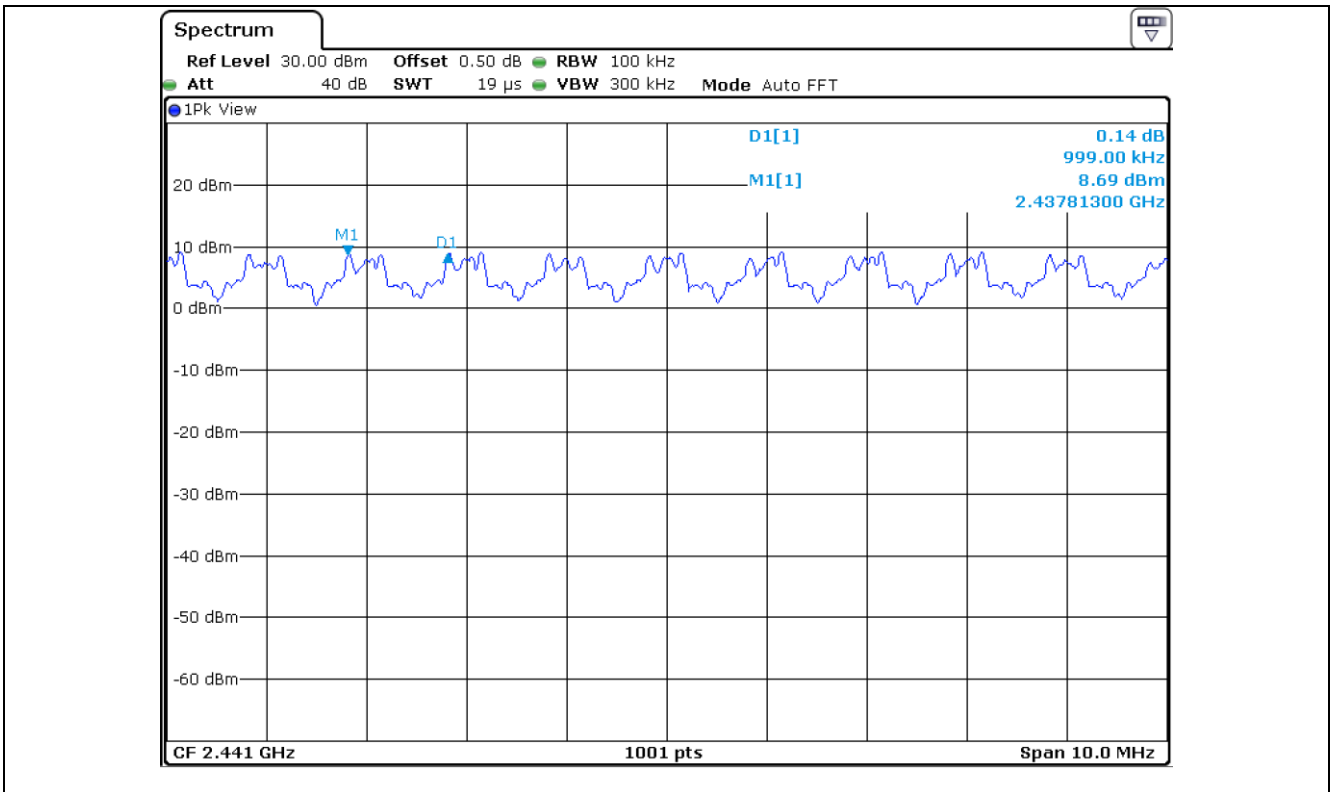


9. NUMBER OF HOPPING CHANNELS

9.1 Operating environment

Temperature : 25 °C
 Relative humidity : 46 % R.H.

9.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The frequency span is set to 100 MHz and the resolution bandwidth is set to 100 kHz. The analyzer is set to peak hold and then complete pseudo-random hopping sequence of the transmitter is captured.

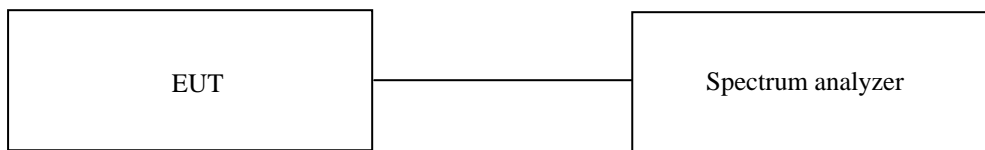

9.3 Test equipment used


Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ - FSV40	Rohde & Schwarz	Signal Analyzer	101009	Mar. 14, 2018 (1Y)

All test equipment used is calibrated on a regular basis.


9.4 Test data for 1 Mbps


- Test Date : September 28, 2018 ~ October 24, 2018
- Test Result : Pass

Data Transfer Rate	Measured value (Number)	Limit (Number)	Margin (Number)
1 Mbps	79	Minimum of 15	64




Tested by: Tae-Ho, Kim / Senior Manager

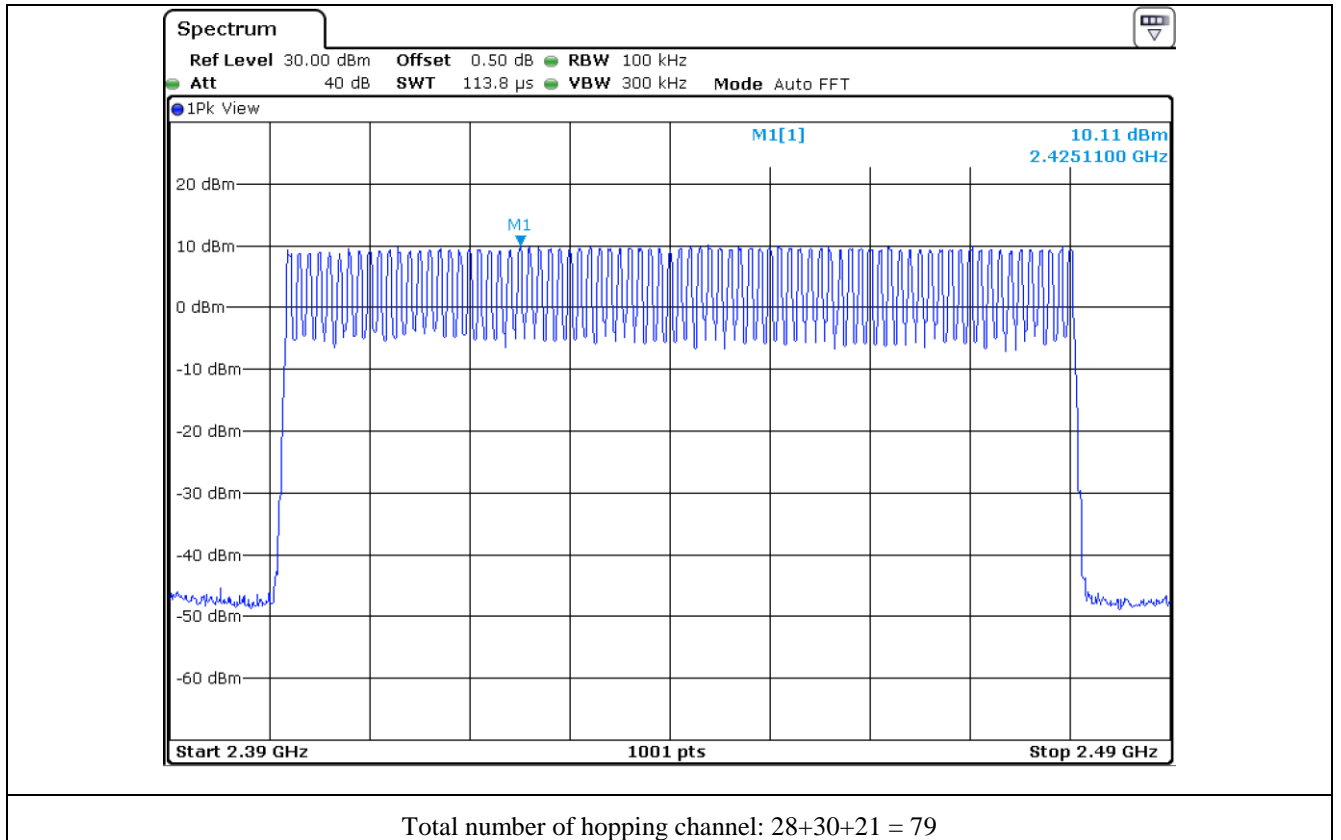


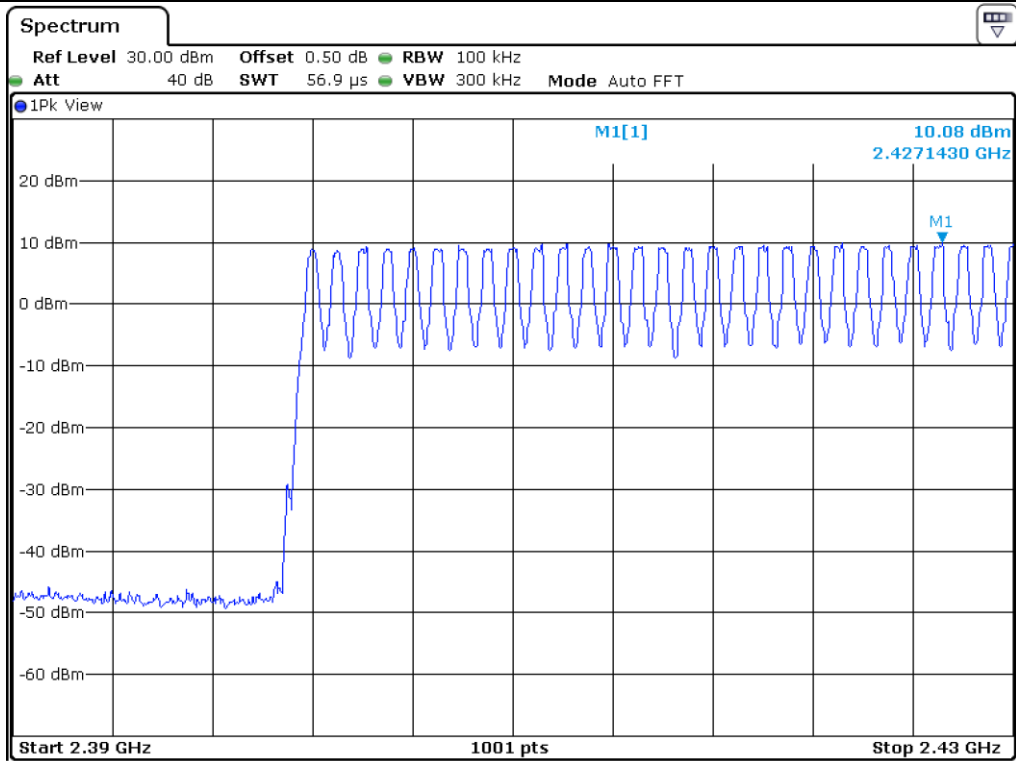

Number of hopping channel: 28

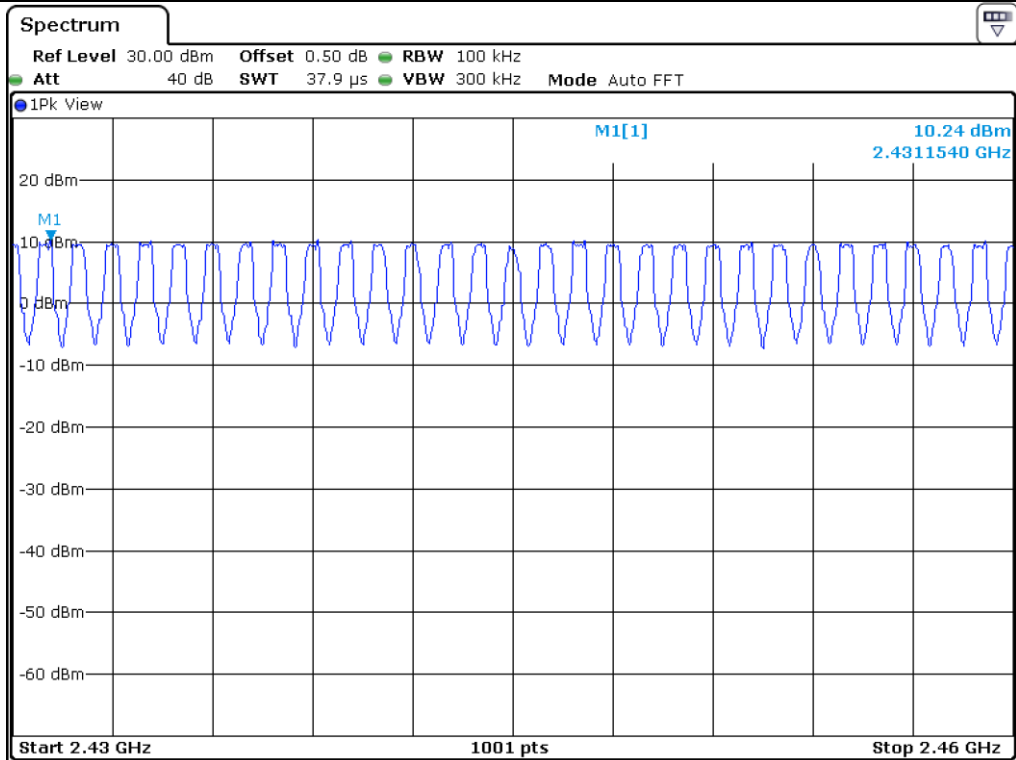

Number of hopping channel: 30

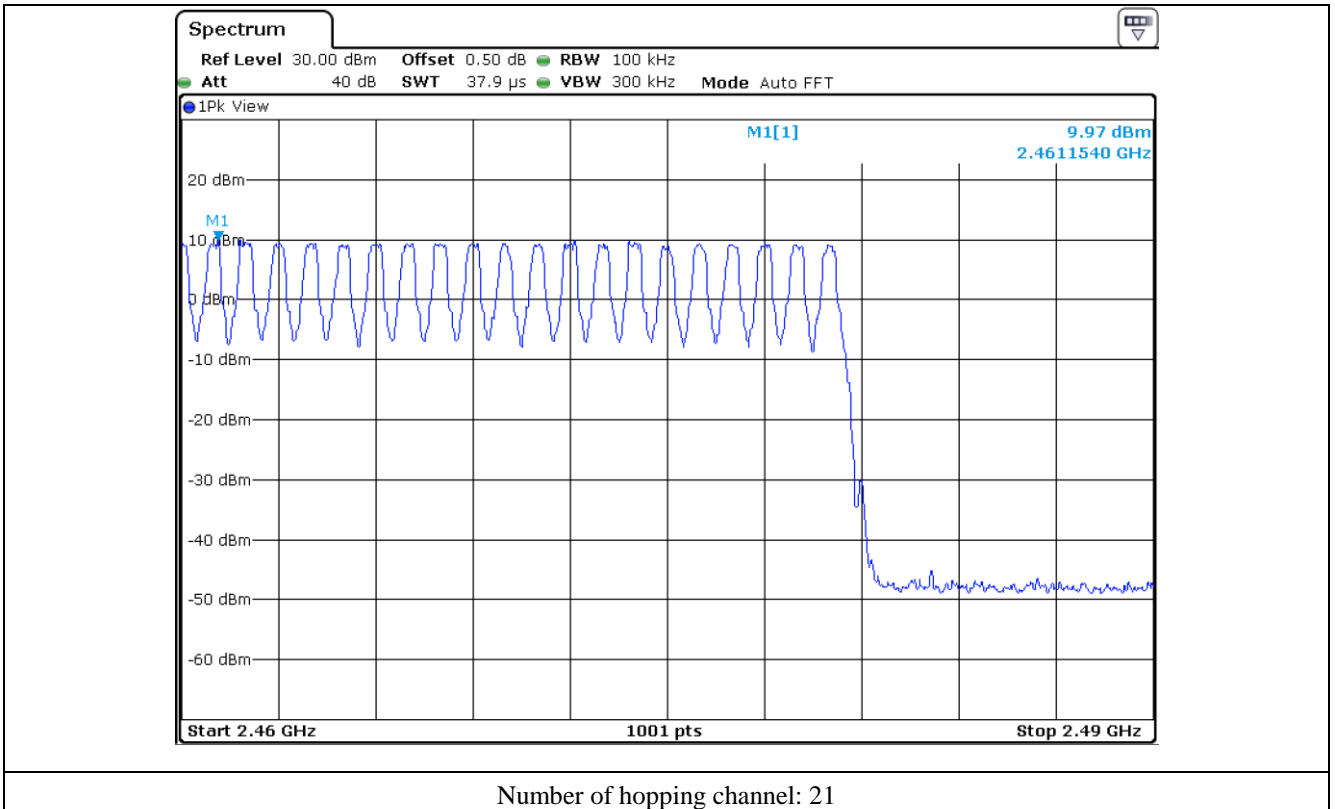



9.5 Test data for 2 Mbps

- Test Date : September 28, 2018 ~ October 24, 2018
- Test Result : Pass


Data Transfer Rate	Measured value (Number)	Limit (Number)	Margin (Number)
2 Mbps	79	Minimum of 15	64

Tested by: Tae-Ho, Kim / Senior Manager

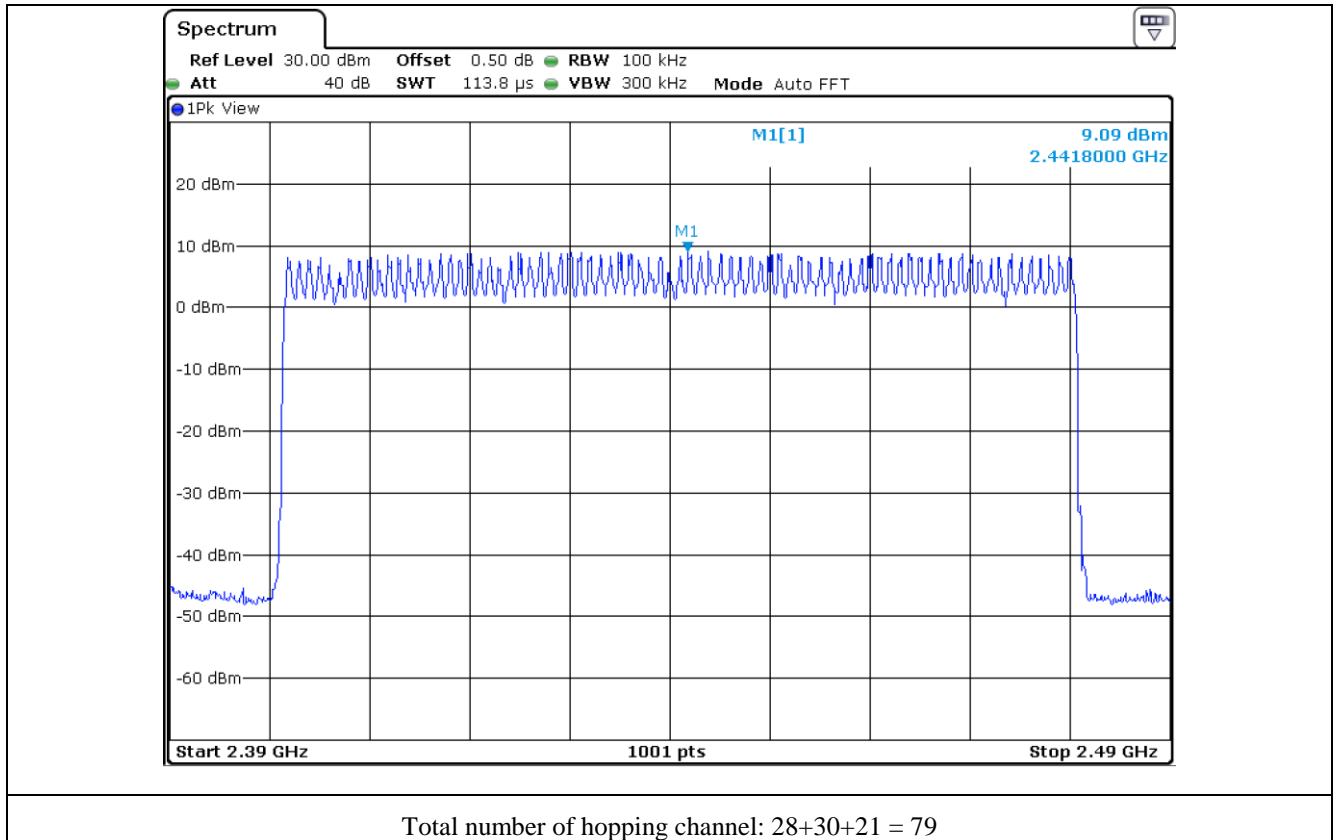


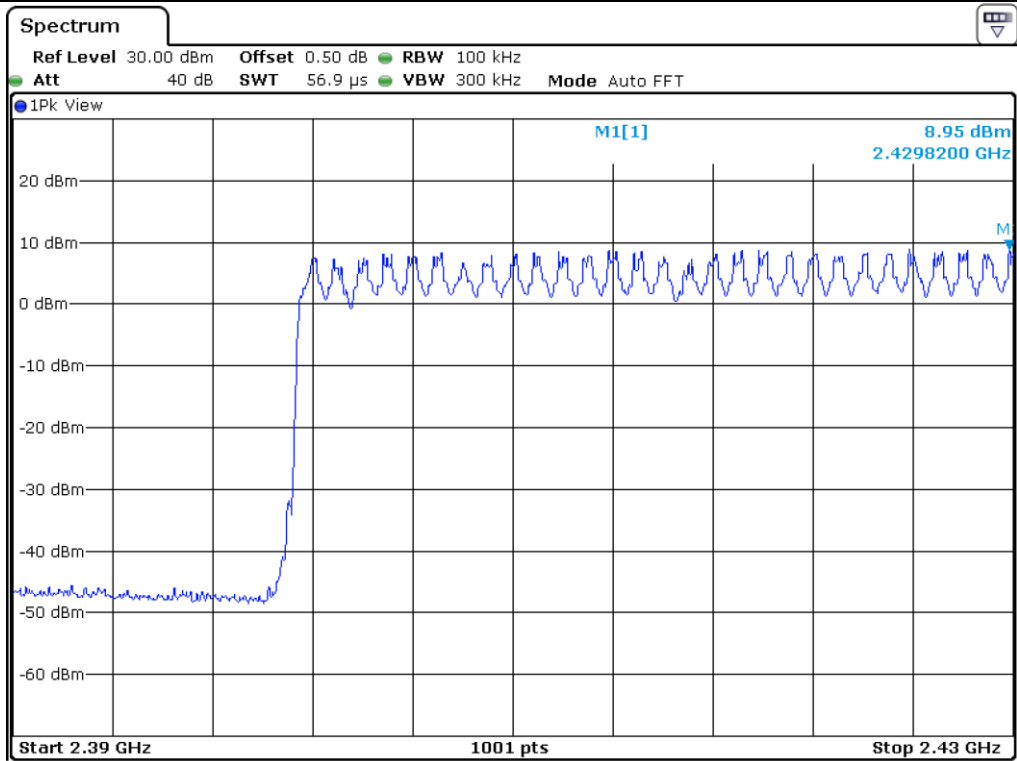

Number of hopping channel: 28

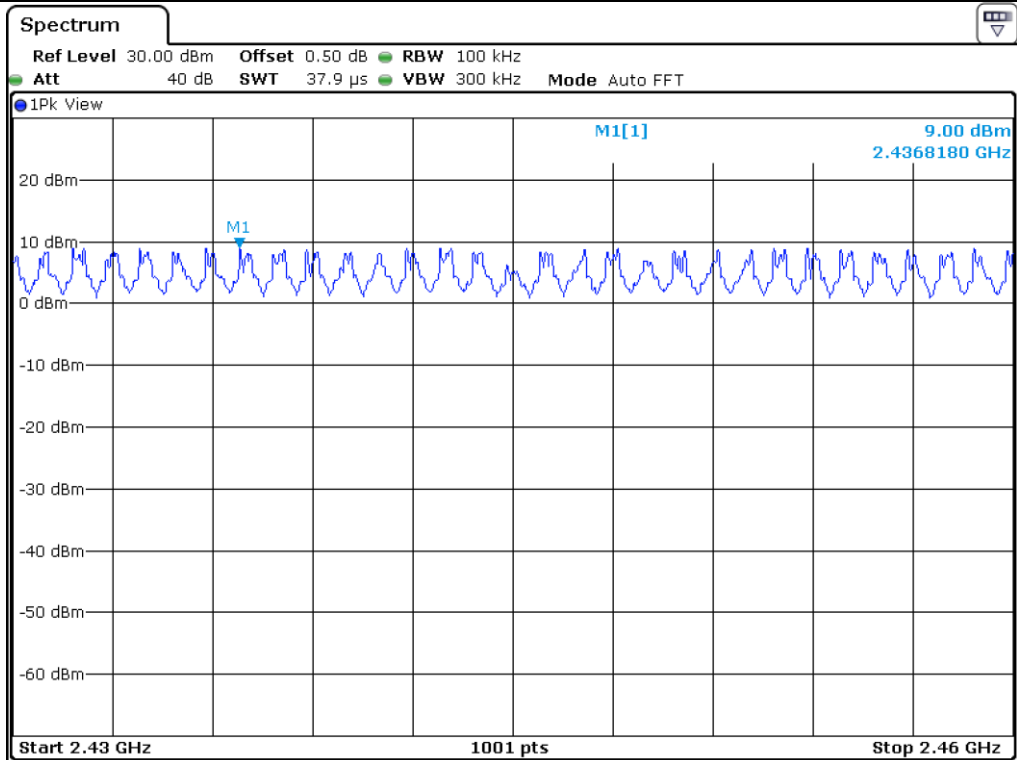


Number of hopping channel: 30

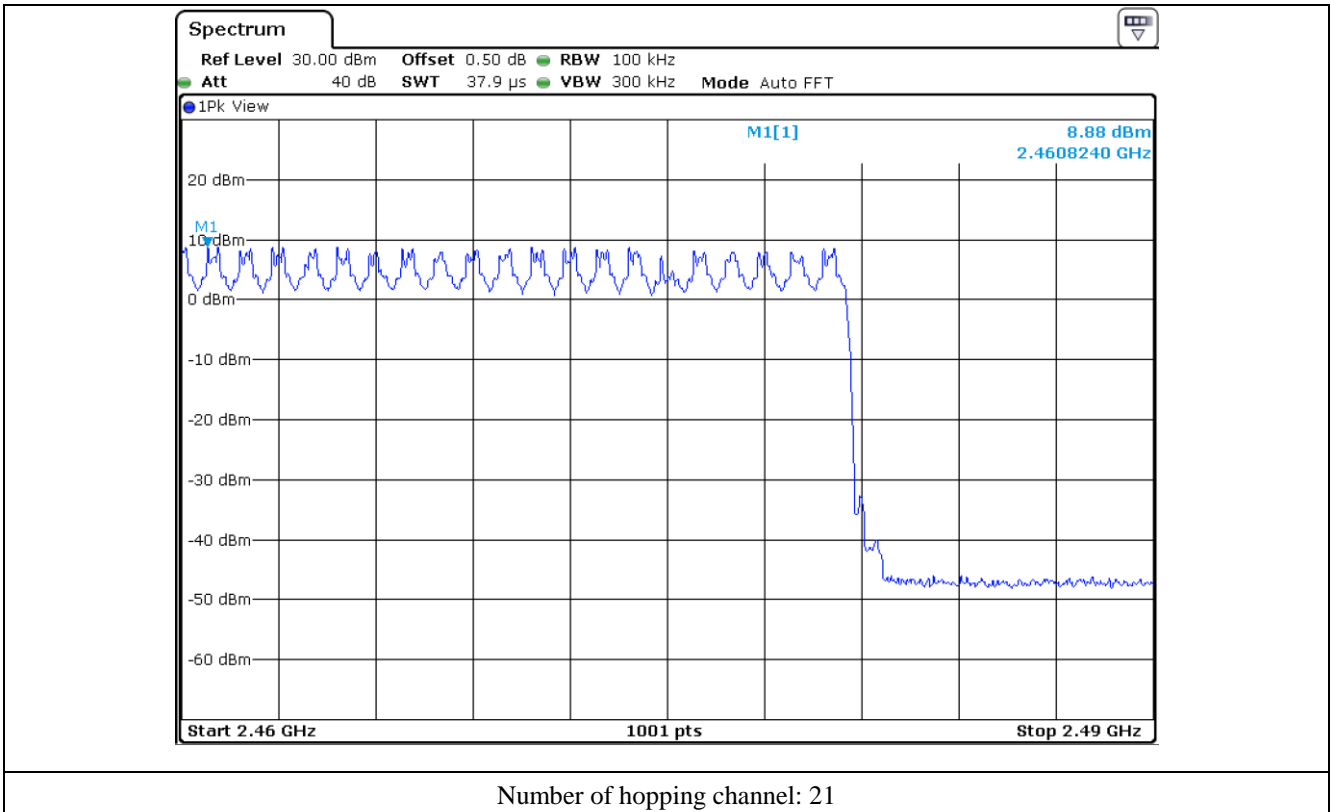


9.6 Test data for 3 Mbps


- Test Date : September 28, 2018 ~ October 24, 2018
- Test Result : Pass

Data Transfer Rate	Measured value (Number)	Limit (Number)	Margin (Number)
3 Mbps	79	Minimum of 15	64




Tested by: Tae-Ho, Kim / Senior Manager

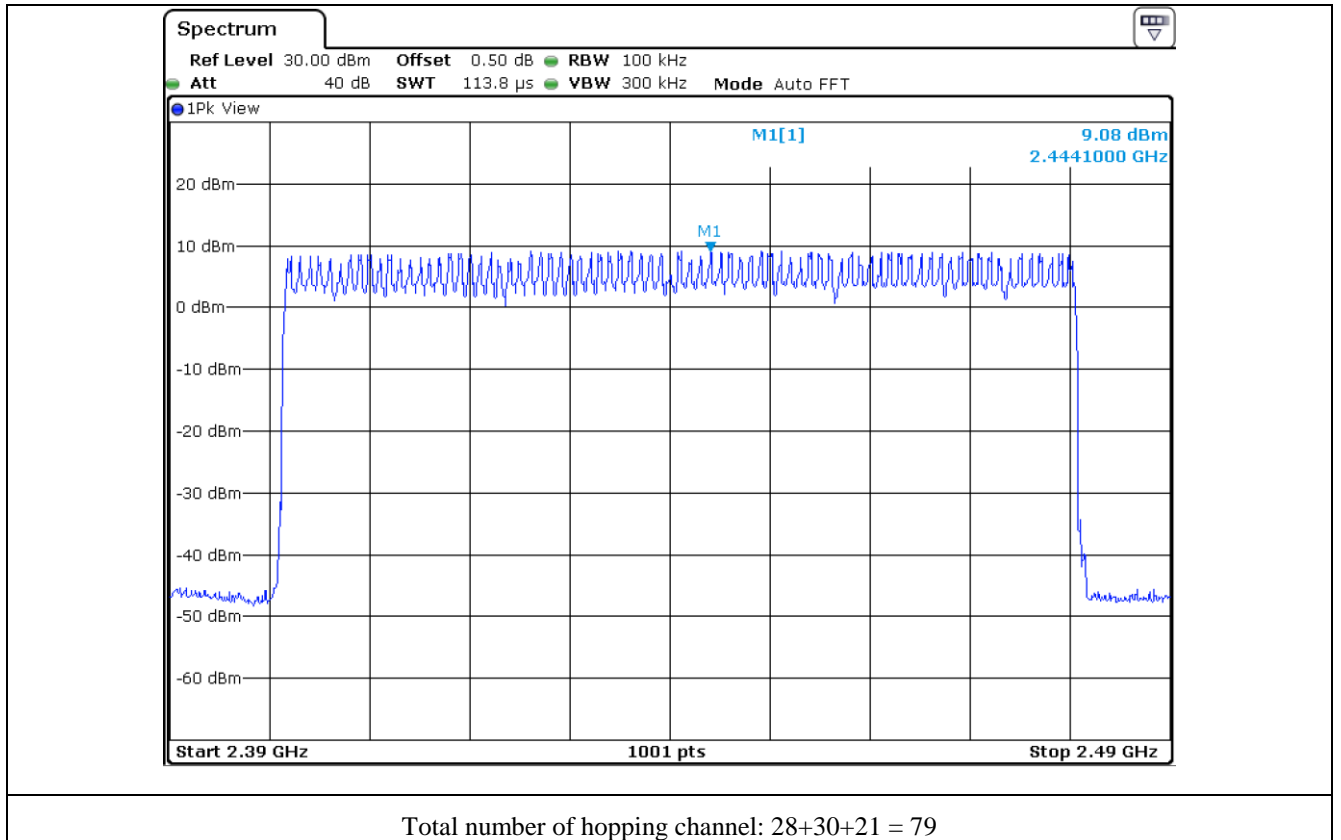


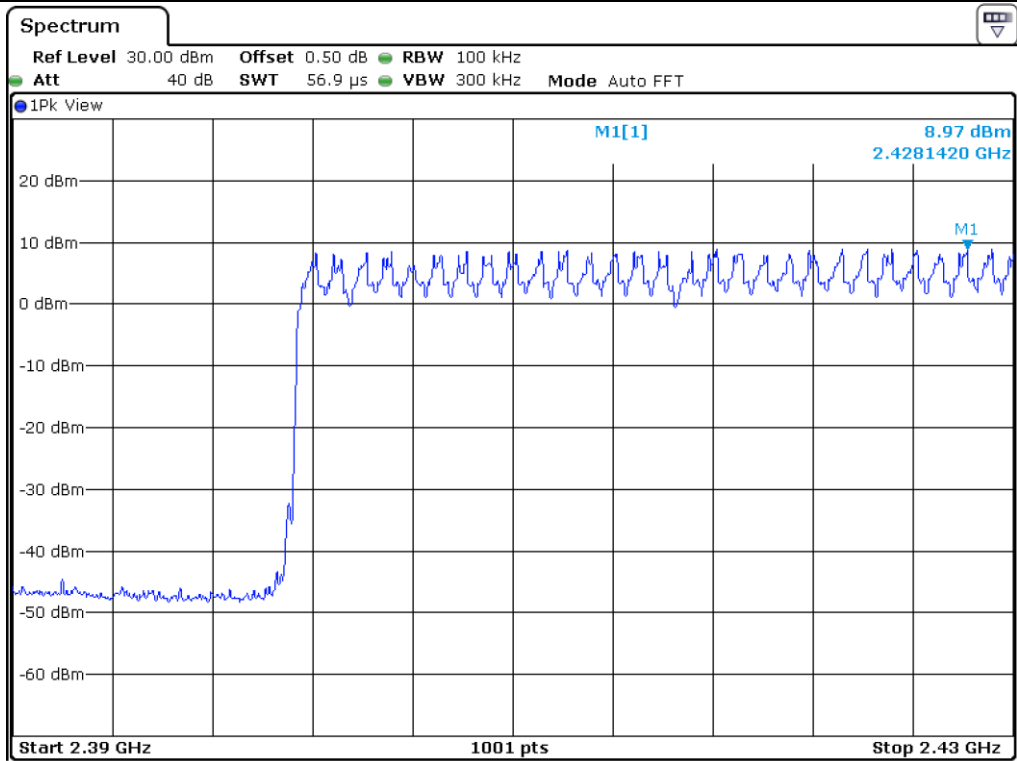

Number of hopping channel: 28

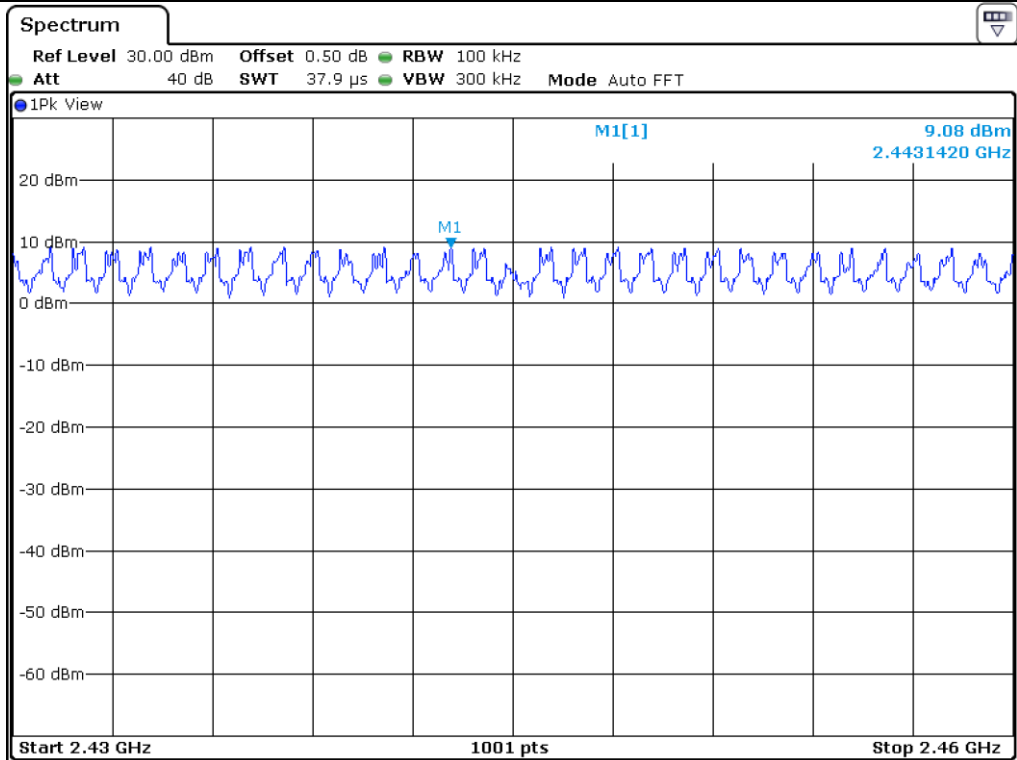

Number of hopping channel: 30

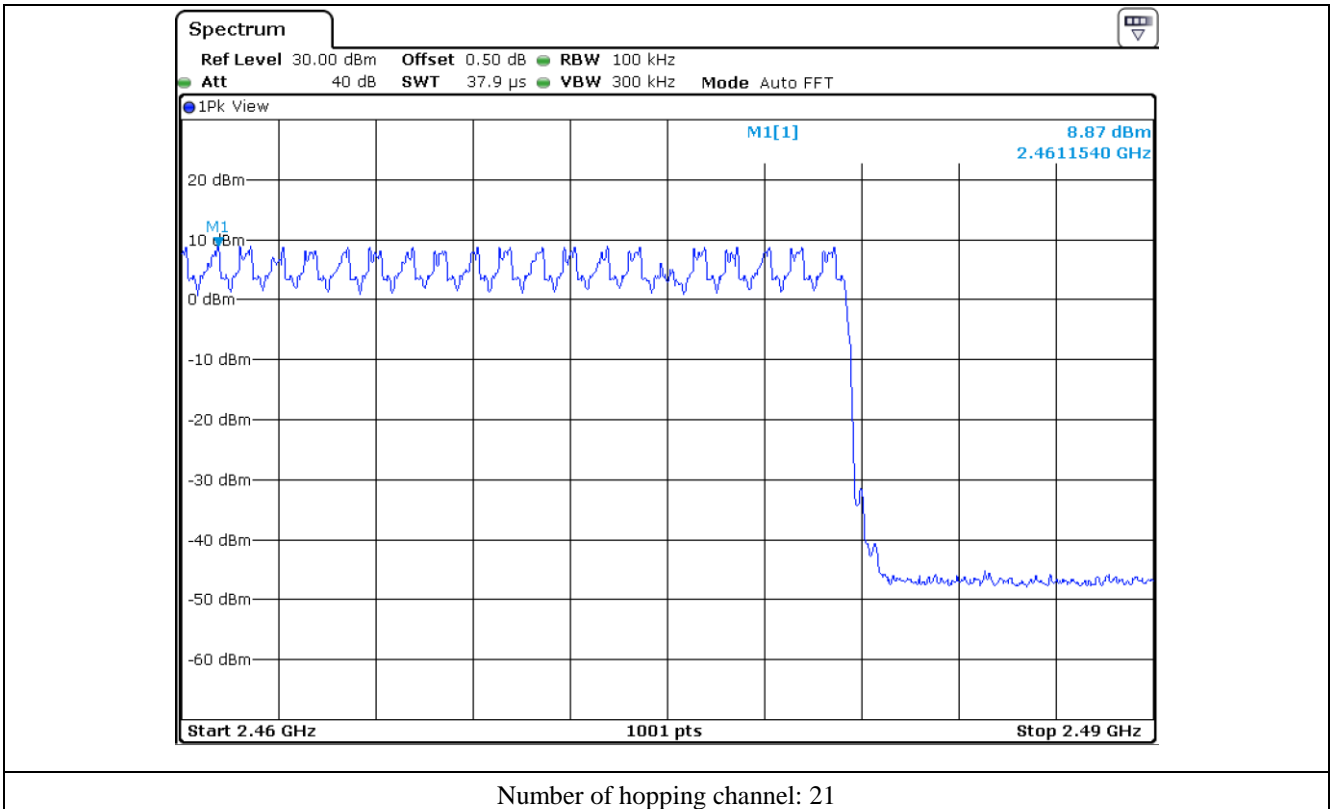


10. TIME OF OCCUPANCY

10.1 Operating environment

Temperature : 25 °C
 Relative humidity : 46 % R.H.

10.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The transmitter is set to operate in its normal frequency hopping mode. The center frequency of the spectrum analyzer is set to one of hopping channels near the center of the operating band and span is set to zero Hz. The sweep time is set to display one complete pulse. The mark delta function is used to measure the duration of the pulses.

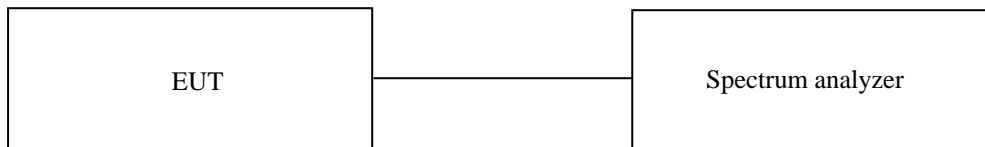

10.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ - FSV40	Rohde & Schwarz	Signal Analyzer	101009	Mar. 14, 2018 (1Y)

All test equipment used is calibrated on a regular basis.

10.4 Test data for 1 Mbps

-. Test Date : September 28, 2018 ~ October 24, 2018

The system makes worst case 1 600 hops per second or 1 time slot has a length of 625 μs with 79 channels.

For DH1 packet type, the EUT needs 1 time slot for transmitting and 1 time slot for receiving and for DH3 packet type, the EUT needs 3 times slots for transmitting and 1 time slot for receiving, and DH5 packet needs 5 times slots for transmitting and 1 time slot for receiving. So The EUT has each channel for 10.13 times per second (= 1 600/2/79) for DH1, and 5.06 times (= 1 600/4/79) for DH3, and 3.38 times (= 1 600/6/79) for DH5.

Packet Type	Pulse Time (ms)	Hops per second with channels	Period Time (ms)	Total Dwell Time (ms)	Limit (ms)	Test Result
DH1	0.370	10.13	31.60	118.44	400	PASS
DH3	1.620	5.06	31.60	259.03	400	
DH5	2.880	3.38	31.60	307.61	400	


Total dwell time is calculated as following.

Total Dwell Time = Pulse time * Hops per second with channels * period time


Remark: See next page for an overview sweep performed with peak detector.




Tested by: Tae-Ho, Kim / Senior Manager

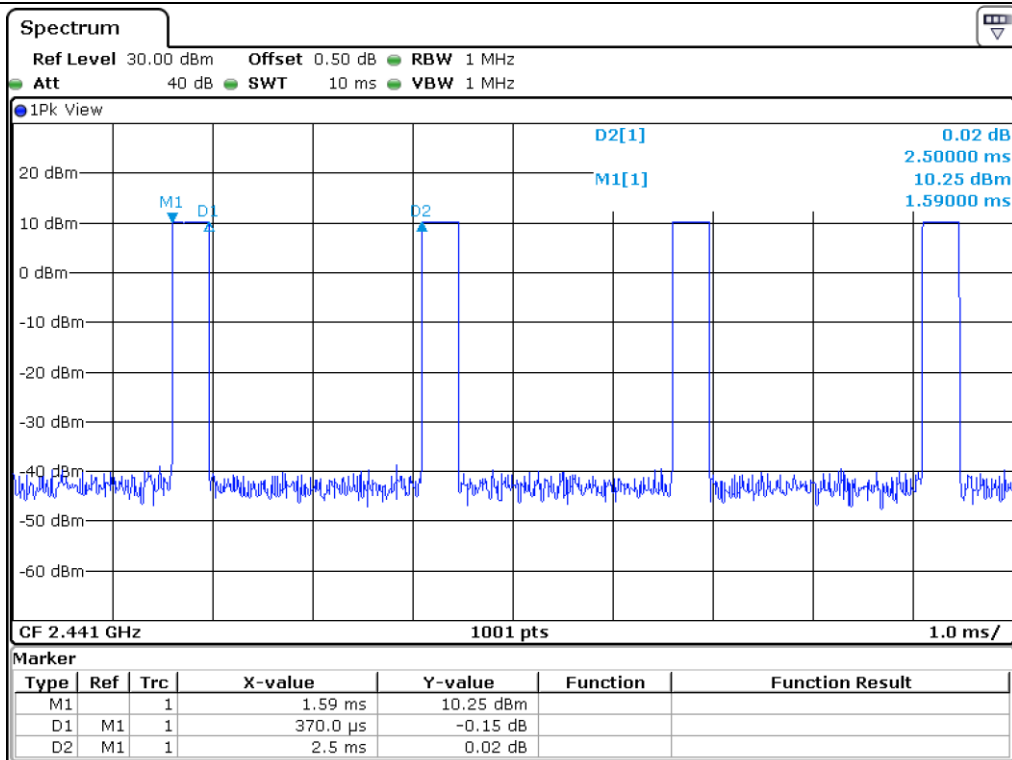

DH1

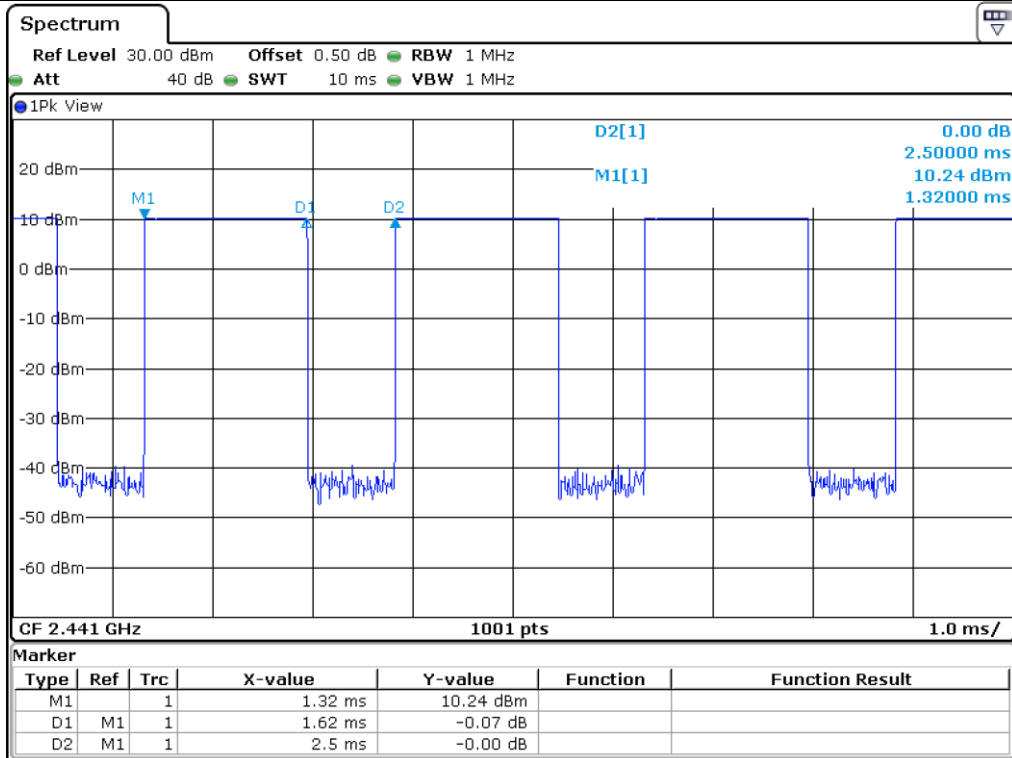

DH3

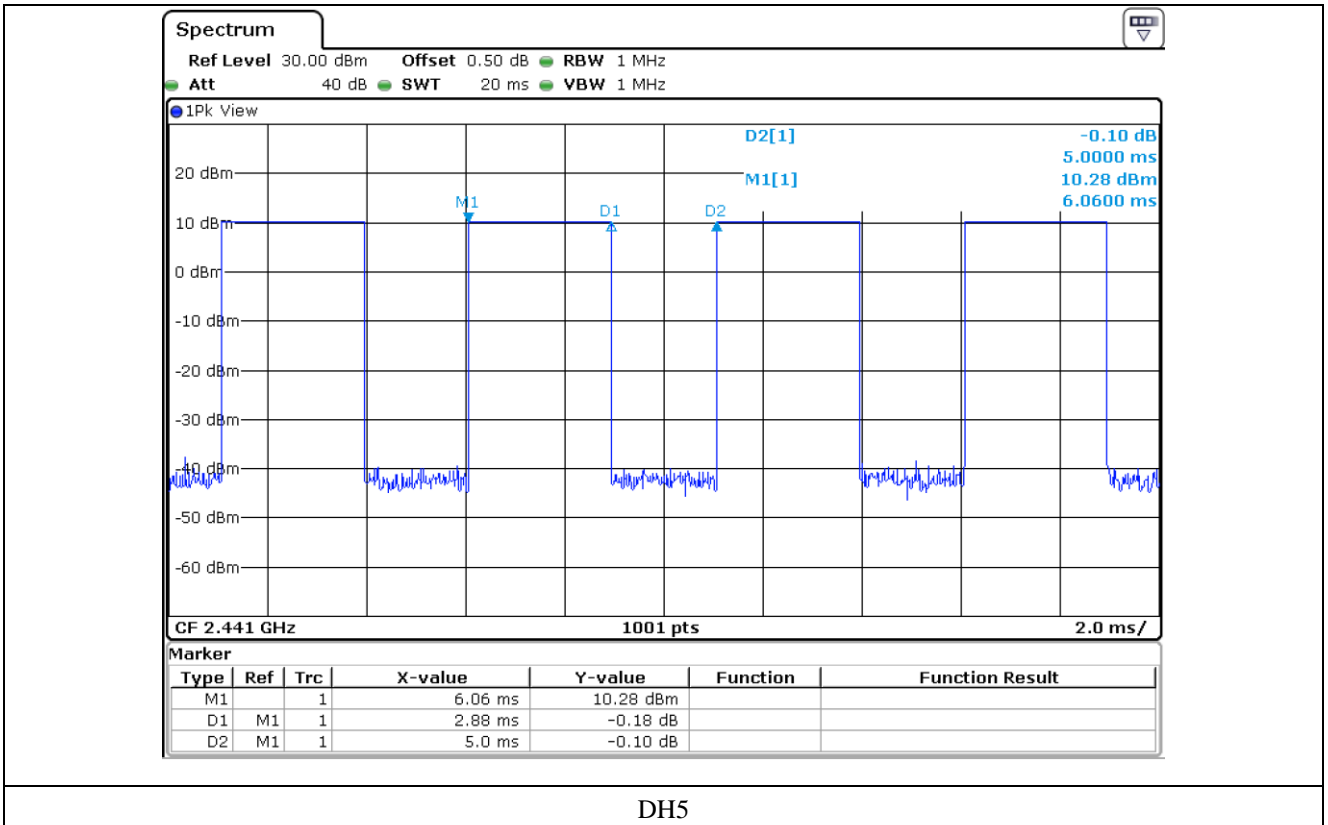

10.5 Test data for 2 Mbps

-. Test Date : September 28, 2018 ~ October 24, 2018

The system makes worst case 1 600 hops per second or 1 time slot has a length of 625 μs with 79 channels.

For DH1 packet type, the EUT needs 1 time slot for transmitting and 1 time slot for receiving and for DH3 packet type, the EUT needs 3 times slots for transmitting and 1 time slot for receiving, and DH5 packet needs 5 times slots for transmitting and 1 time slot for receiving. So The EUT has each channel for 10.13 times per second (= 1 600/2/79) for DH1, and 5.06 times (= 1 600/4/79) for DH3, and 3.38 times (= 1 600/6/79) for DH5.

Packet Type	Pulse Time (ms)	Hops per second with channels	Period Time (ms)	Total Dwell Time (ms)	Limit (ms)	Test Result
DH1	0.380	10.13	31.60	121.64	400	PASS
DH3	1.630	5.06	31.60	260.63	400	
DH5	2.880	3.38	31.60	307.61	400	


Total dwell time is calculated as following.

Total Dwell Time = Pulse time * Hops per second with channels * period time


Remark: See next page for an overview sweep performed with peak detector.




Tested by: Tae-Ho, Kim / Senior Manager

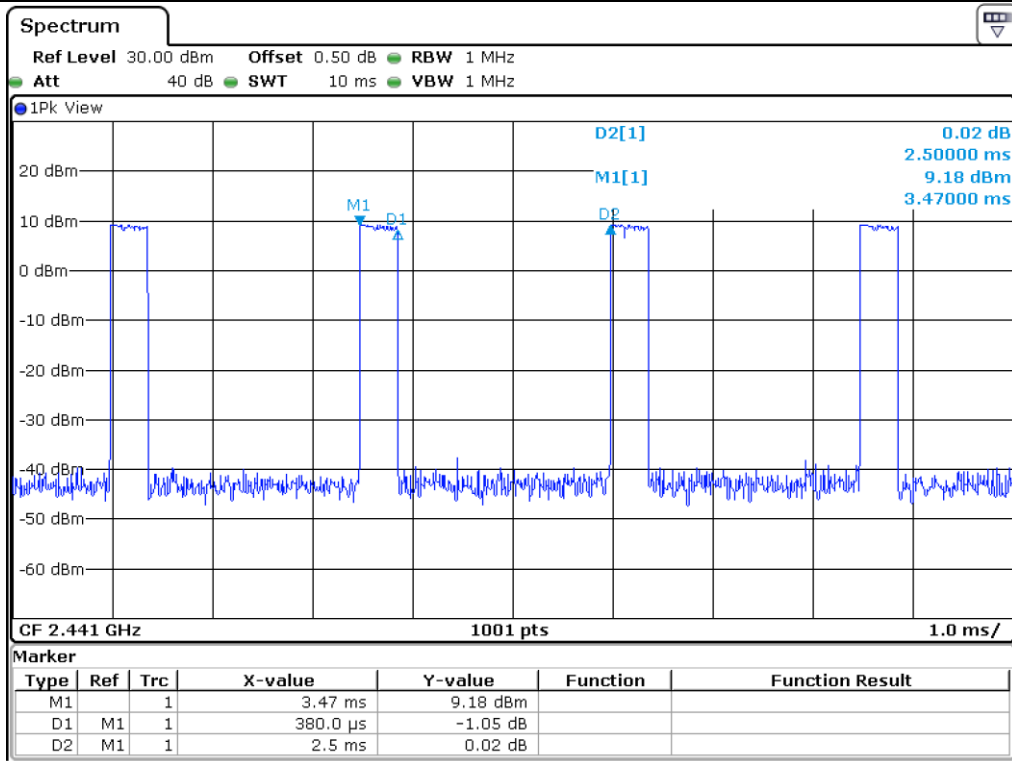

DH1

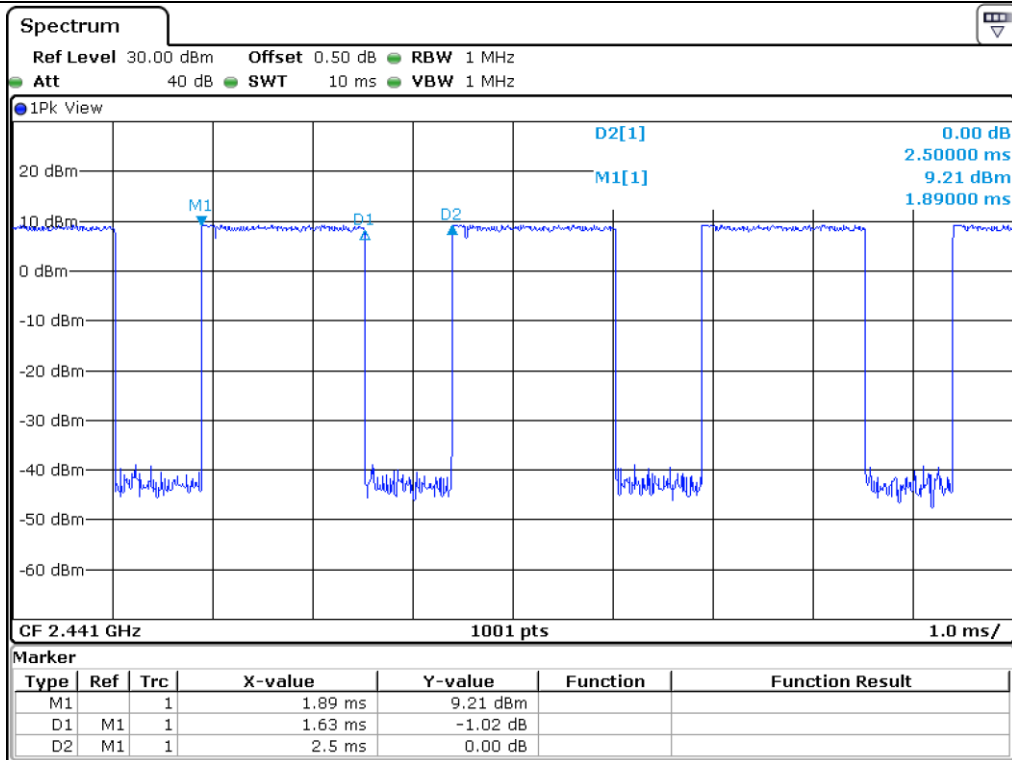

DH3

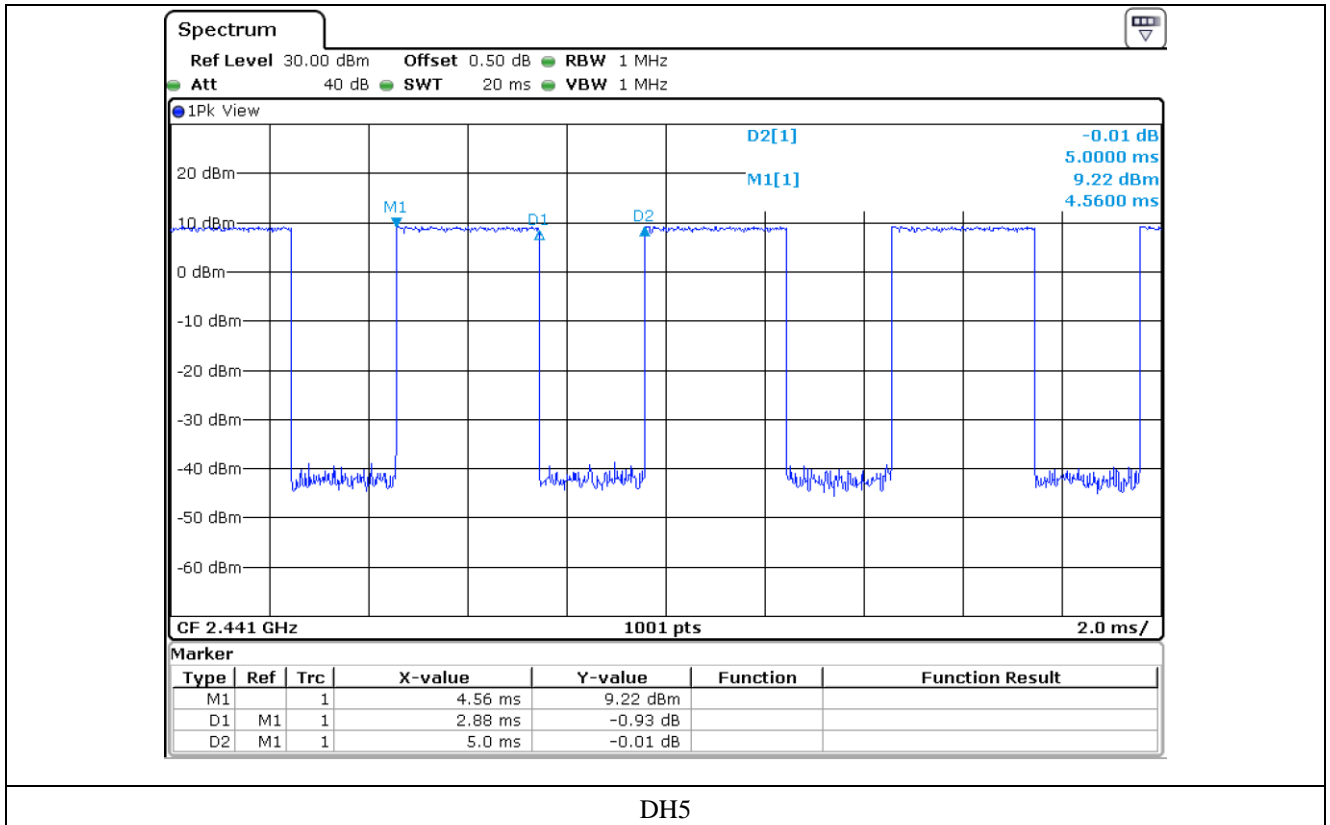

10.6 Test data for 3 Mbps

-. Test Date : September 28, 2018 ~ October 24, 2018

The system makes worst case 1 600 hops per second or 1 time slot has a length of 625 μs with 79 channels.

For DH1 packet type, the EUT needs 1 time slot for transmitting and 1 time slot for receiving and for DH3 packet type, the EUT needs 3 times slots for transmitting and 1 time slot for receiving, and DH5 packet needs 5 times slots for transmitting and 1 time slot for receiving. So The EUT has each channel for 10.13 times per second (= 1 600/2/79) for DH1, and 5.06 times (= 1 600/4/79) for DH3, and 3.38 times (= 1 600/6/79) for DH5.

Packet Type	Pulse Time (ms)	Hops per second with channels	Period Time (ms)	Total Dwell Time (ms)	Limit (ms)	Test Result
DH1	0.370	10.13	31.60	118.44	400	PASS
DH3	1.620	5.06	31.60	259.03	400	
DH5	2.880	3.38	31.60	307.61	400	


Total dwell time is calculated as following.

Total Dwell Time = Pulse time * Hops per second with channels * period time


Remark: See next page for an overview sweep performed with peak detector.




Tested by: Tae-Ho, Kim / Senior Manager

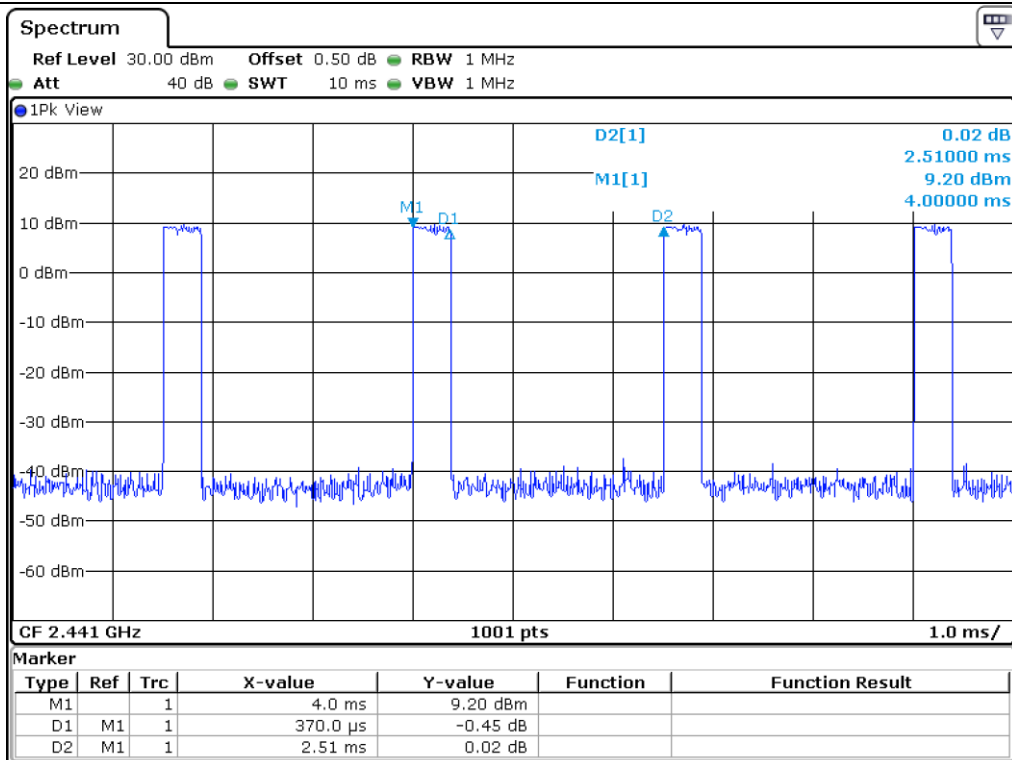

DH1

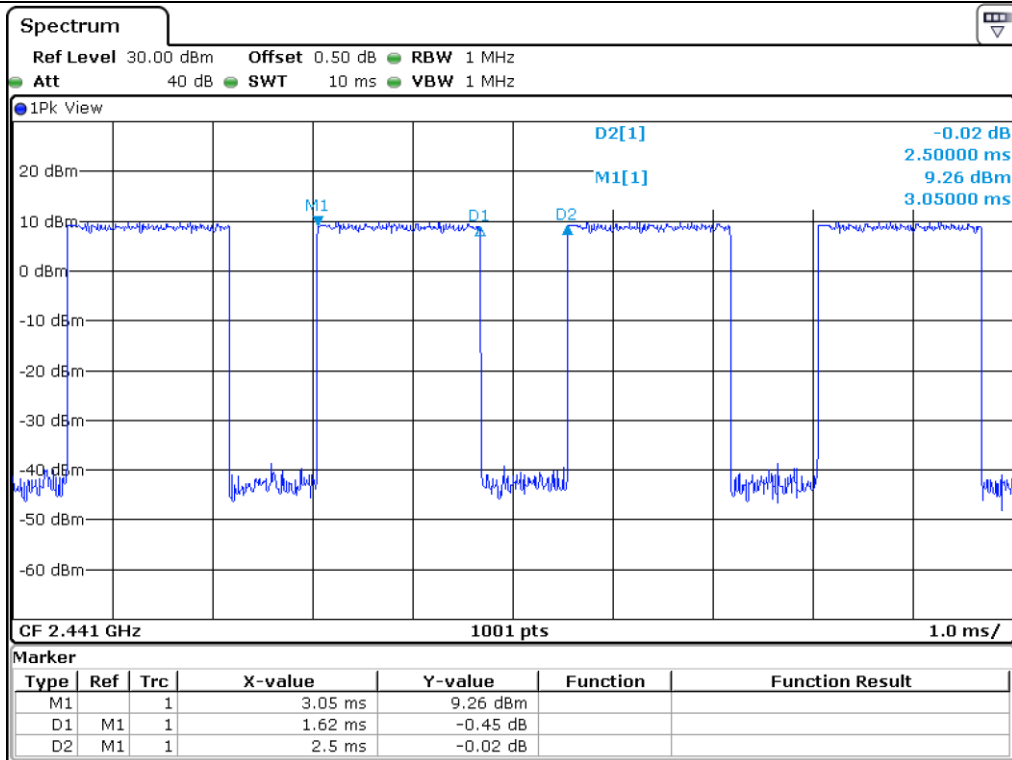

DH3

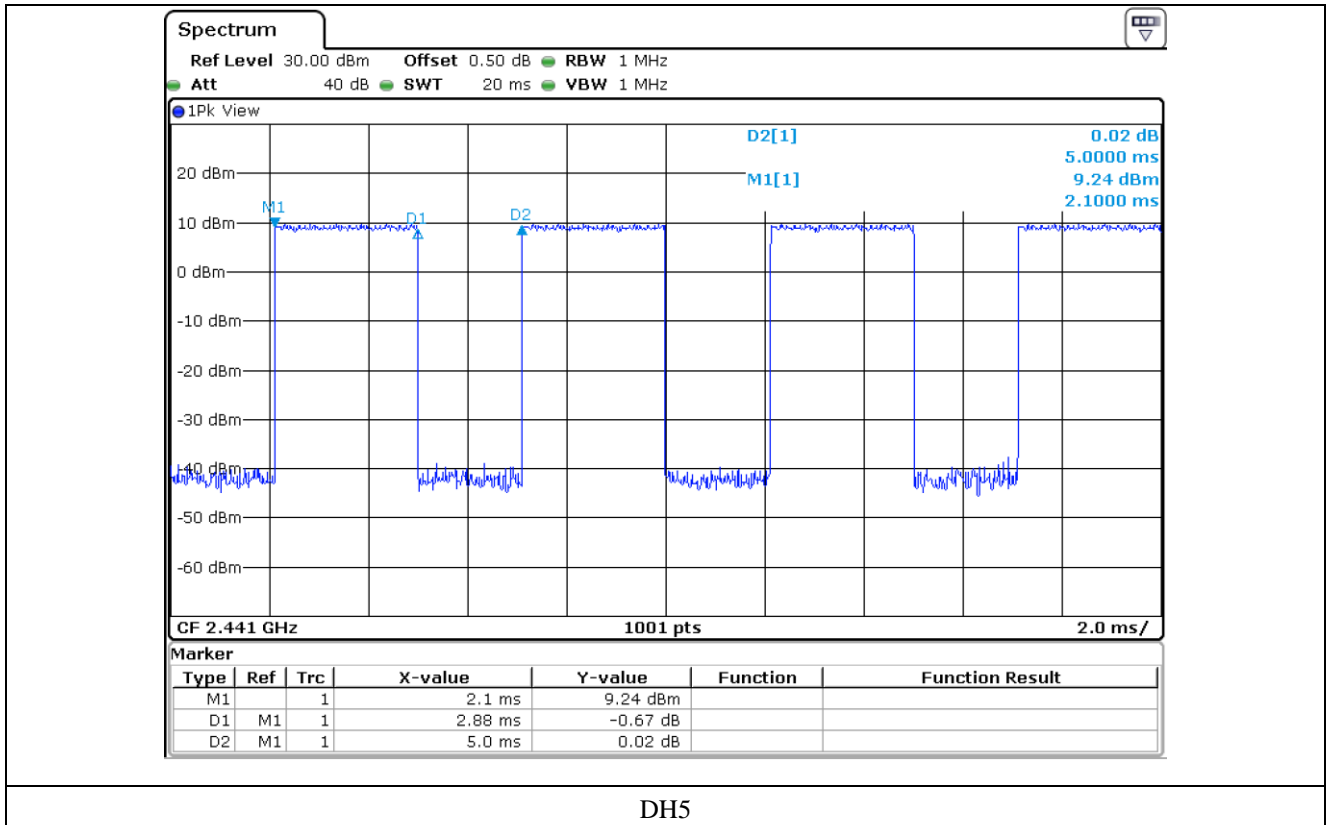

11. MAXIMUM PEAK OUTPUT POWER


11.1 Operating environment

Temperature : 25 °C
 Relative humidity : 46 % R.H.

11.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer.

The resolution bandwidth is set to \geq DTS Bandwidth, the video bandwidth is set to 3 times the resolution bandwidth.

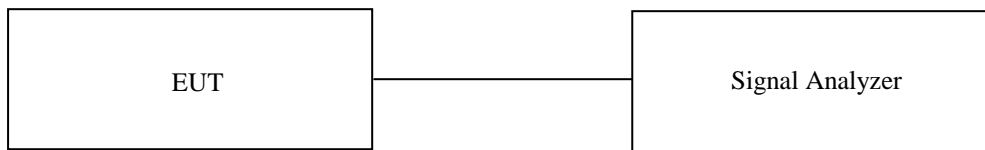

11.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ - FSV40	Rohde & Schwarz	Signal Analyzer	101009	Mar. 14, 2018 (1Y)

All test equipment used is calibrated on a regular basis.

11.4 Test data for 1 Mbps


- Test Date : September 28, 2018 ~ October 24, 2018


- Test Result : Pass

CHANNEL	FREQUENCY (MHz)	MEASURED VLAUE (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 402.00	9.63	21.00	11.37
MIDDLE	2 441.00	10.43	21.00	10.57
HIGH	2 480.00	10.15	21.00	10.85


Remark. Margin = Limit – Measured Value (=Receiver Reading + Cable Loss)

Tested by: Tae-Ho, Kim / Senior Manager

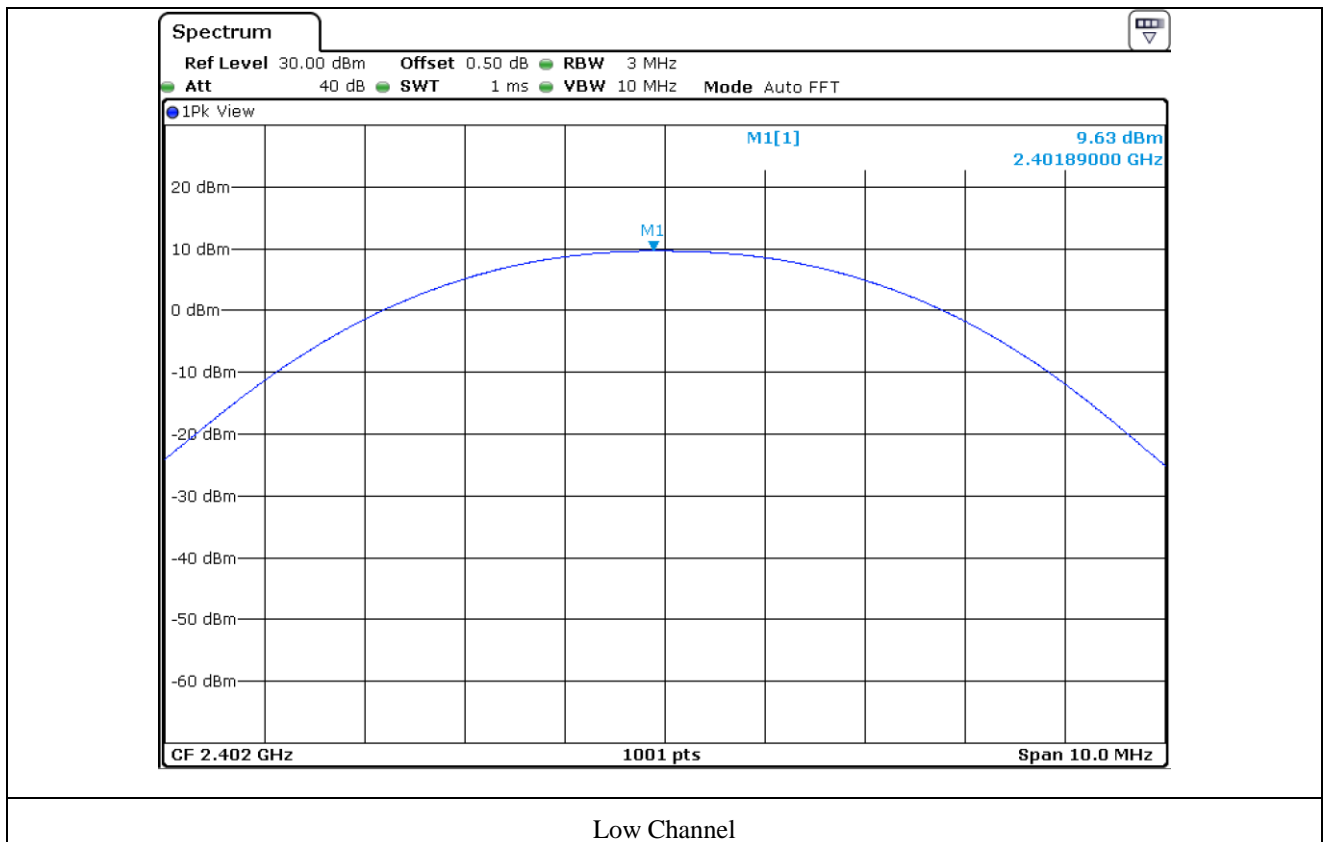

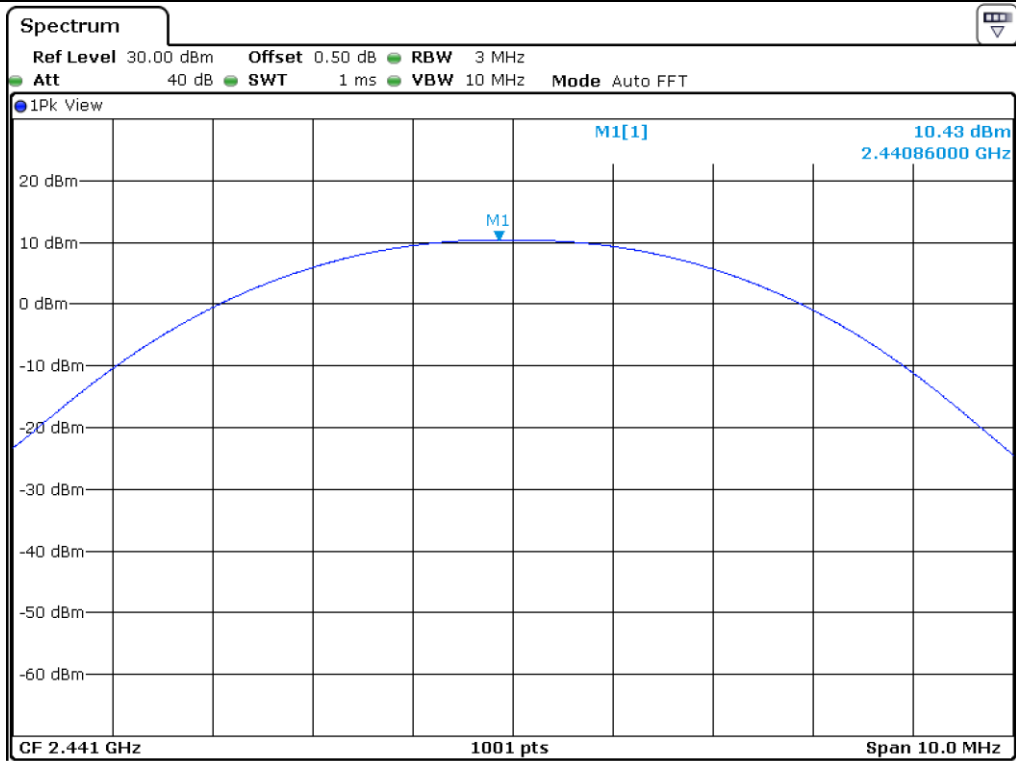

Middle Channel

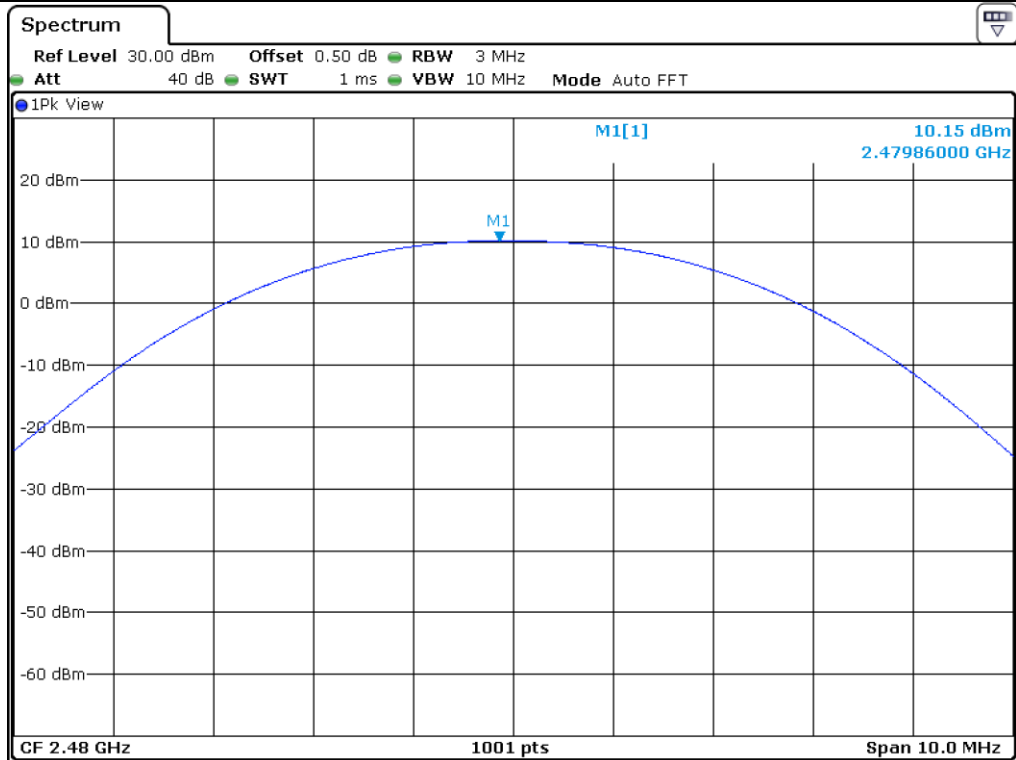

High Channel

11.5 Test data for 2 Mbps

- Test Date : September 28, 2018 ~ October 24, 2018


- Test Result : Pass


CHANNEL	FREQUENCY (MHz)	MEASURED VLAUE (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 402.00	9.25	21.00	11.75
MIDDLE	2 441.00	10.09	21.00	10.91
HIGH	2 480.00	9.79	21.00	11.21

Remark. Margin = Limit – Measured Value (=Receiver Reading + Cable Loss)




Tested by: Tae-Ho, Kim / Senior Manager

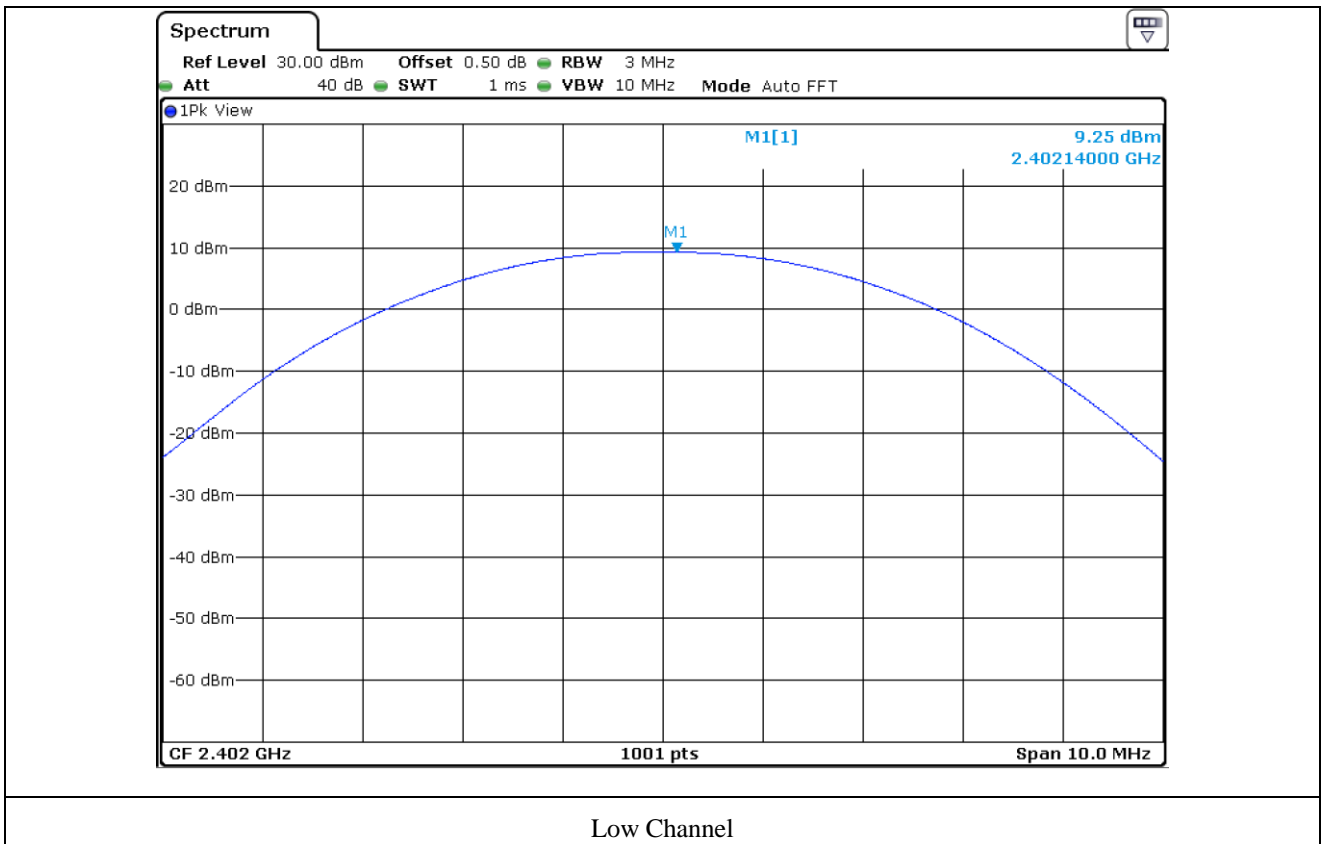

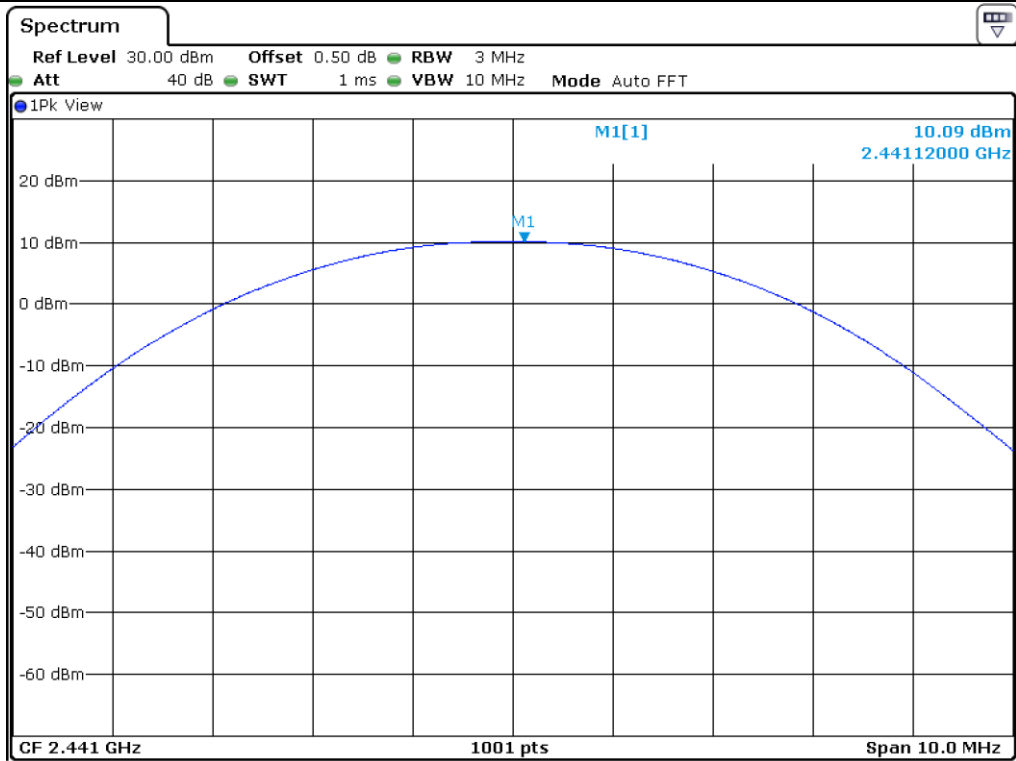

Middle Channel

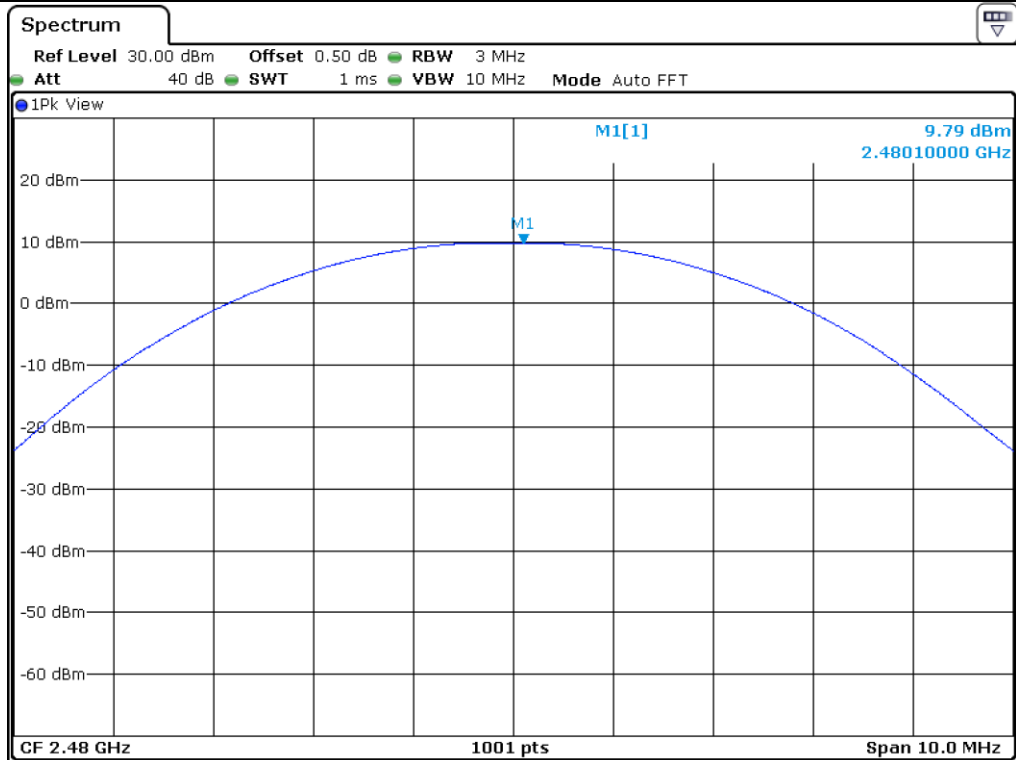

High Channel

11.6 Test data for 3 Mbps

- Test Date : September 28, 2018 ~ October 24, 2018


- Test Result : Pass

CHANNEL	FREQUENCY (MHz)	MEASURED VLAUE (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 402.00	9.68	21.00	11.32
MIDDLE	2 441.00	10.47	21.00	10.53
HIGH	2 480.00	10.18	21.00	10.82


Remark. Margin = Limit – Measured Value (=Receiver Reading + Cable Loss)




Tested by: Tae-Ho, Kim / Senior Manager

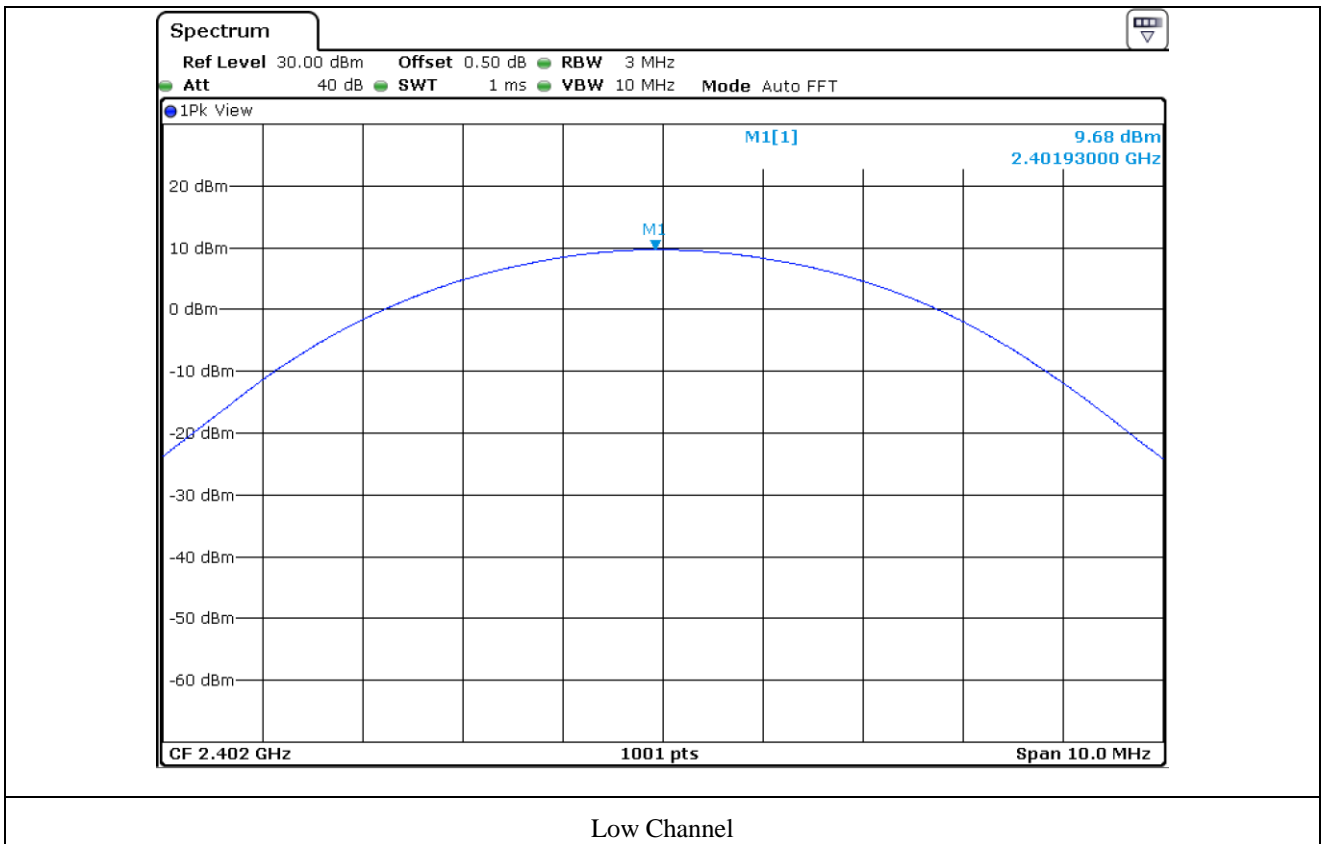

Low Channel

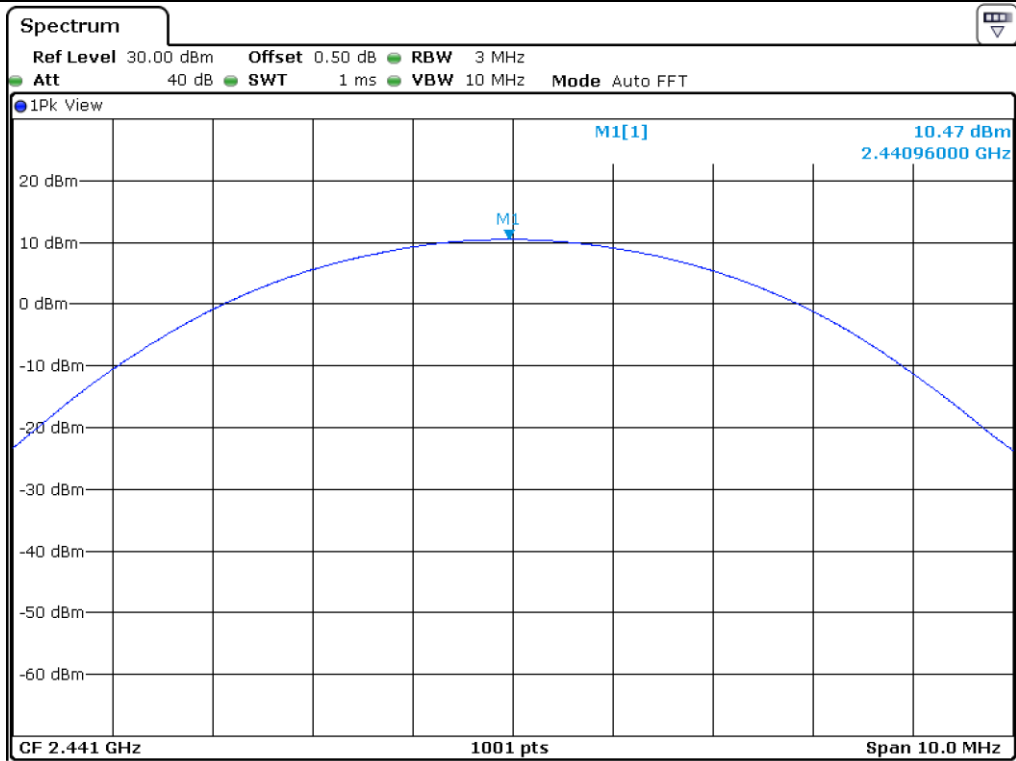

Middle Channel

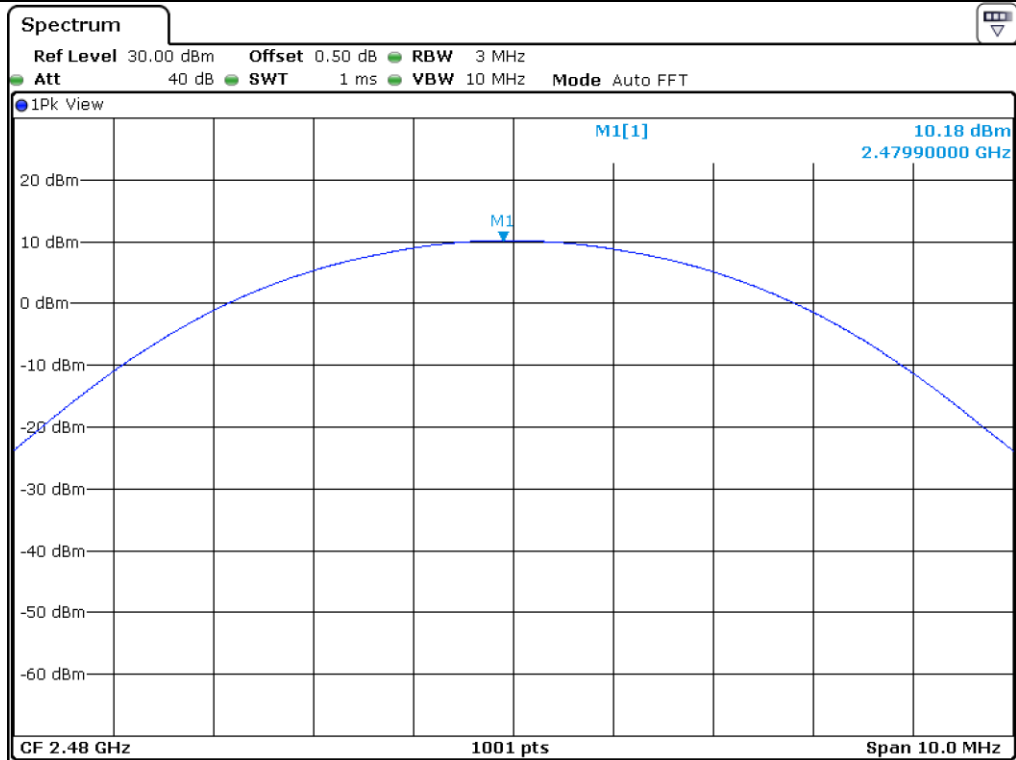

High Channel


12. 100 kHz BANDWIDTH OUTSIDE THE FREQUENCY BAND

12.1 Operating environment

Temperature : 25 °C
 Relative humidity : 46 % R.H.

12.2 Test set-up for conducted measurement

The antenna output of the EUT was connected to the spectrum analyzer. The resolution and video bandwidth is set to 100 kHz, and peak detection was used.

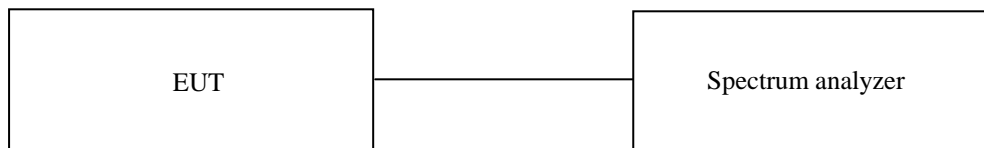

12.3 Test set-up for radiated measurement

The radiated emissions measurements were performed on the 3 m semi anechoic chamber. The EUT was placed on turntable approximately 1.5 m above the ground plane.

The frequency spectrum from 30 MHz to 26.5 GHz was scanned and maximum emission levels at each frequency recorded. The system was rotated 360°, and the antenna was varied in the height between 1.0 m and 4.0 m in order to determine the maximum emission levels. This procedure was performed for horizontal and vertical polarization of the receiving antenna.


12.4 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ - FSV40	Rohde & Schwarz	Signal Analyzer	101009	Mar. 14, 2018 (1Y)
■ - ESU	Rohde & Schwarz	EMI Test Receiver	100261	Mar. 29, 2018 (1Y)
■ - 310N	Sonoma Instrument	Pre-Amplifier	312544	Mar. 28, 2018 (1Y)
■ - BBV 9718 B	Schwarzbeck	Amplifier	009	Mar. 16, 2018 (1Y)
■ - SCU40A	Rohde & Schwarz	Signal Conditioning unit	100436	Mar. 15, 2018 (1Y)
■ - DT3000-3t	Innco System	Turn Table	DT3000/093	N/A
■ - MA-4000XPET	Innco System	Antenna Master	MA4000/509	N/A
■ - VULB9163	Schwarzbeck	TRILOG Broadband Antenna	777	Apr. 13, 2018 (2Y)
■ - BBHA9120D	Schwarzbeck	Horn Antenna	BBHA9120D295	Aug. 16, 2017 (2Y)
■ - BBHA9170	Schwarzbeck	Horn Antenna	BBHA9170179	Jul. 28, 2017 (2Y)


All test equipment used is calibrated on a regular basis.

12.5 Test data for conducted emission


12.5.1 Test data for 1 Mbps

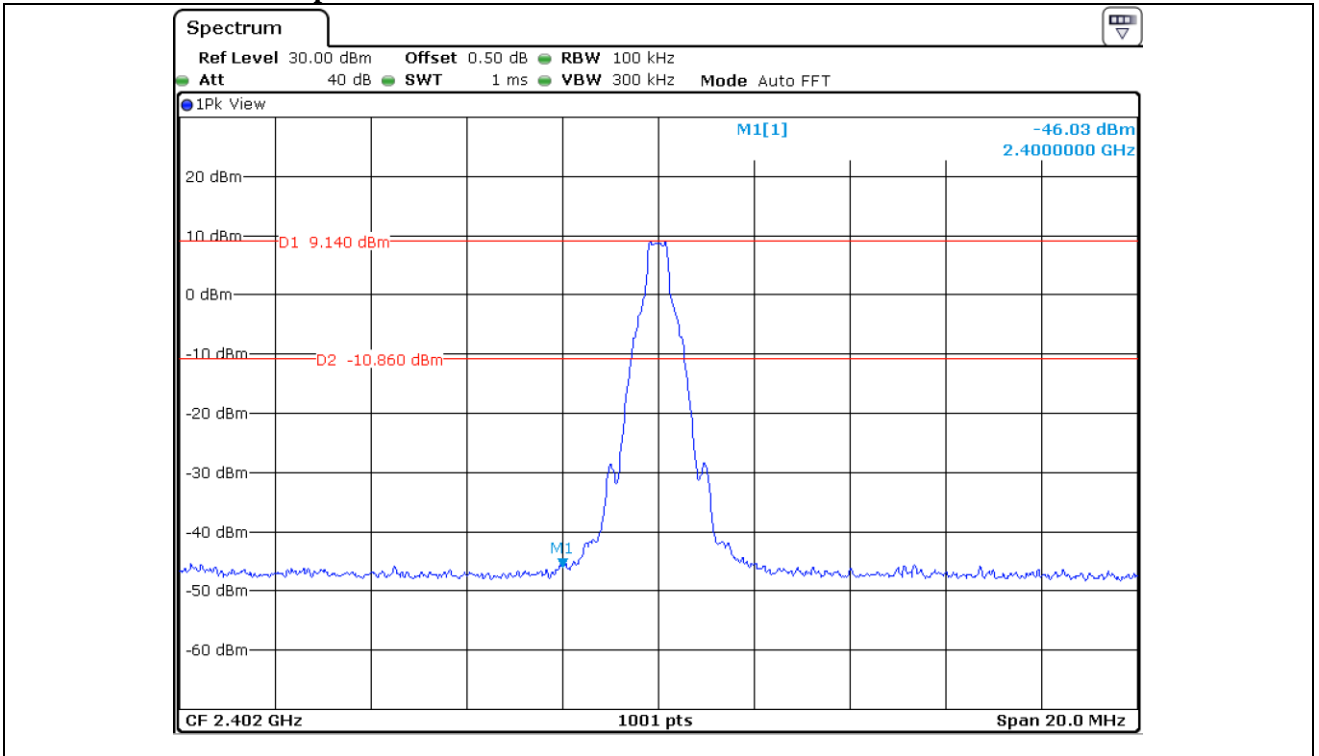


Low Channel

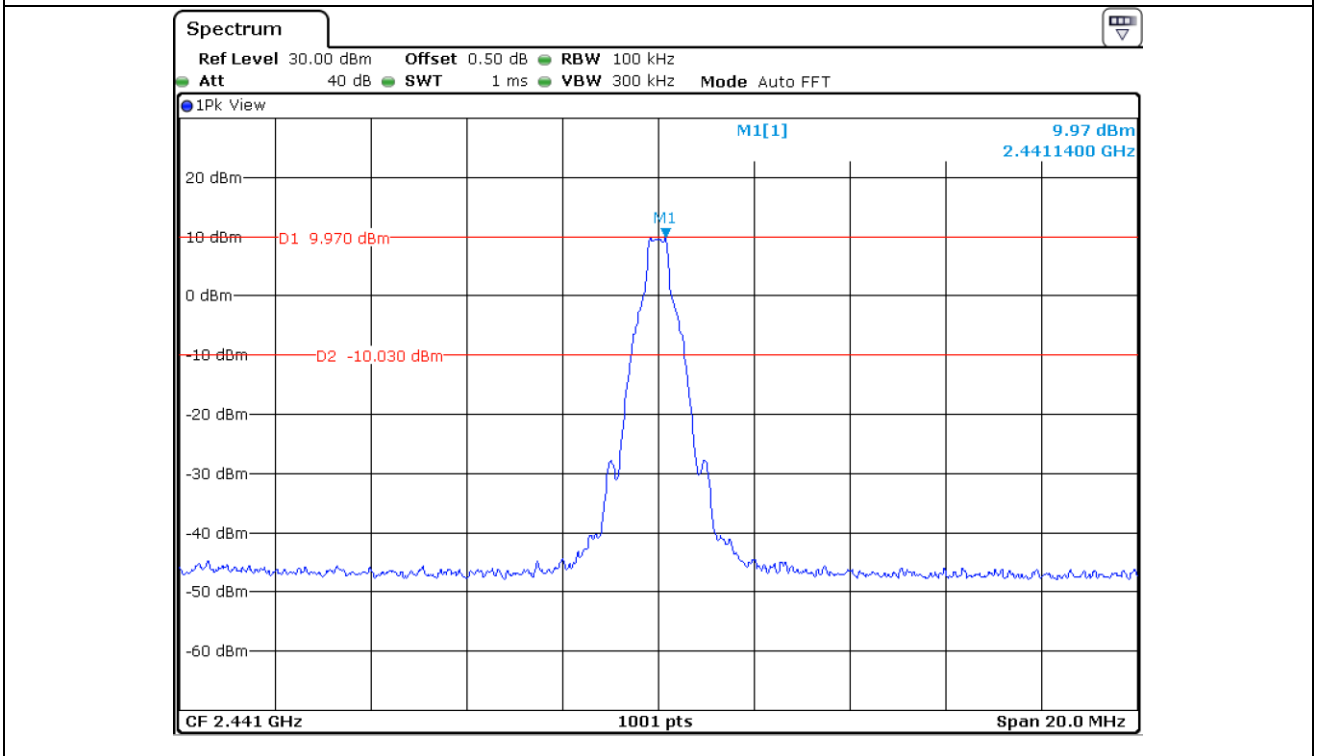


Middle Channel

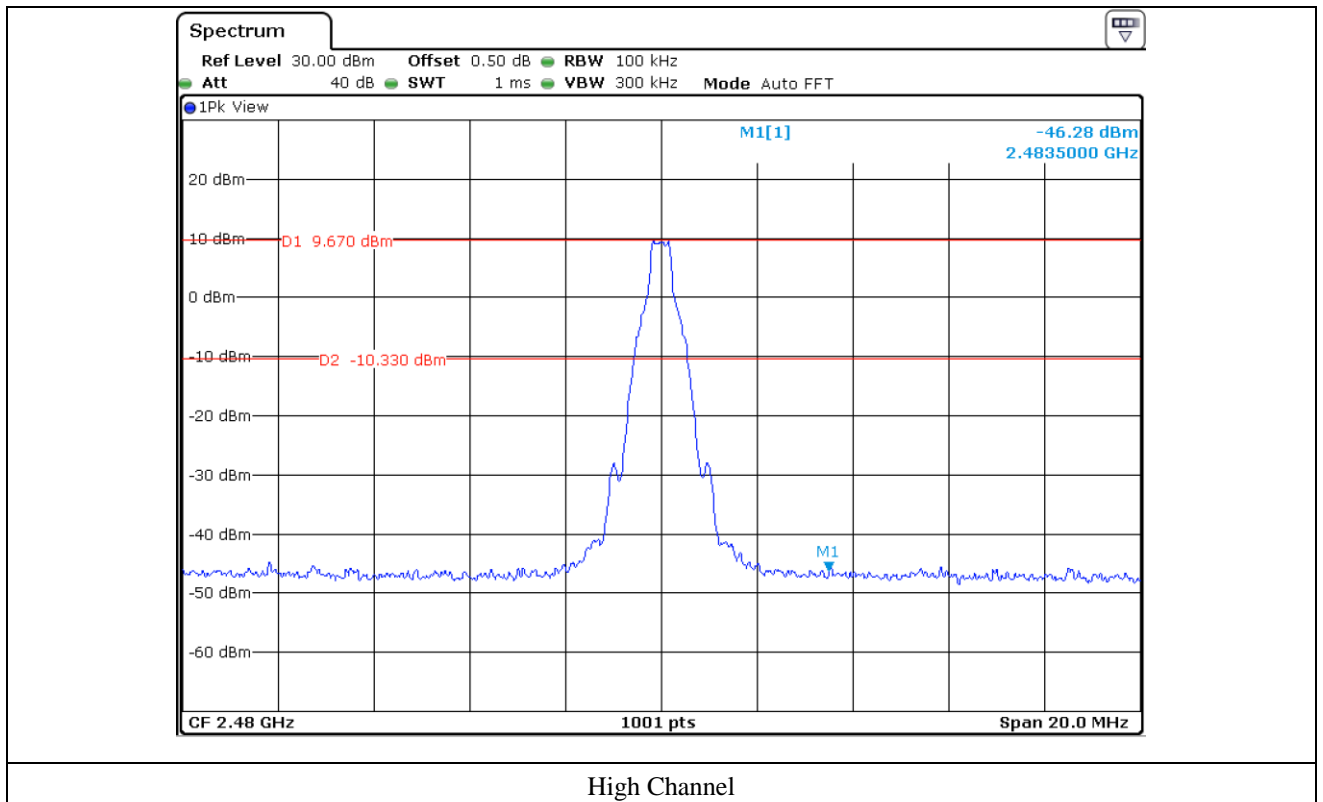


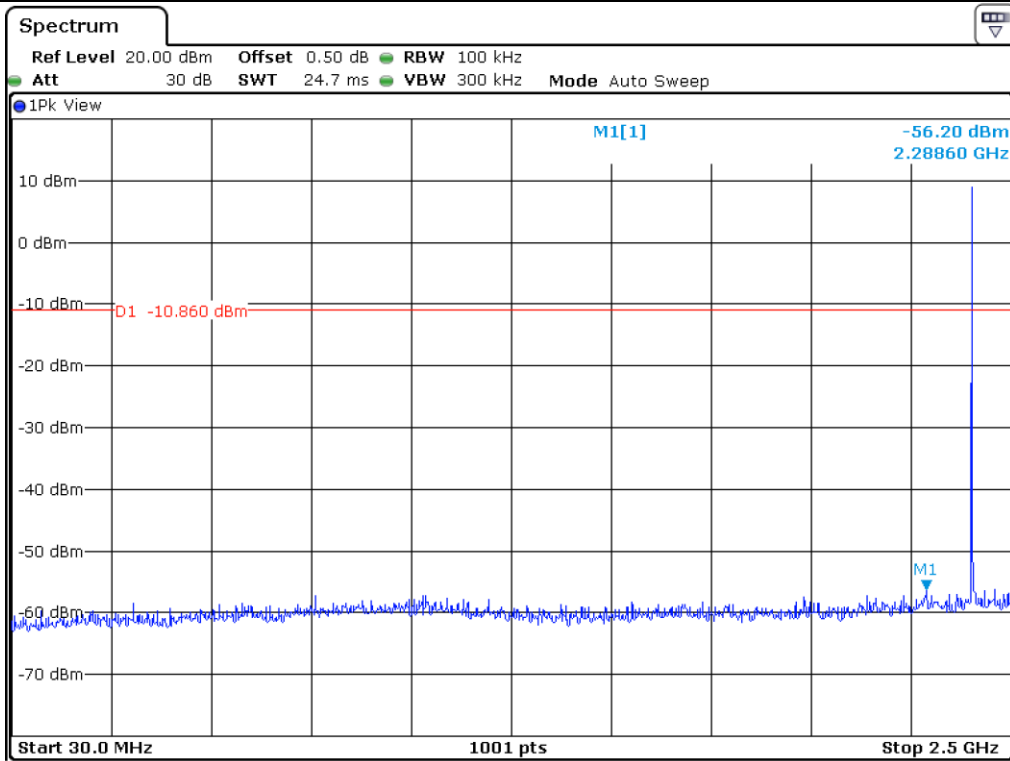


Low Channel

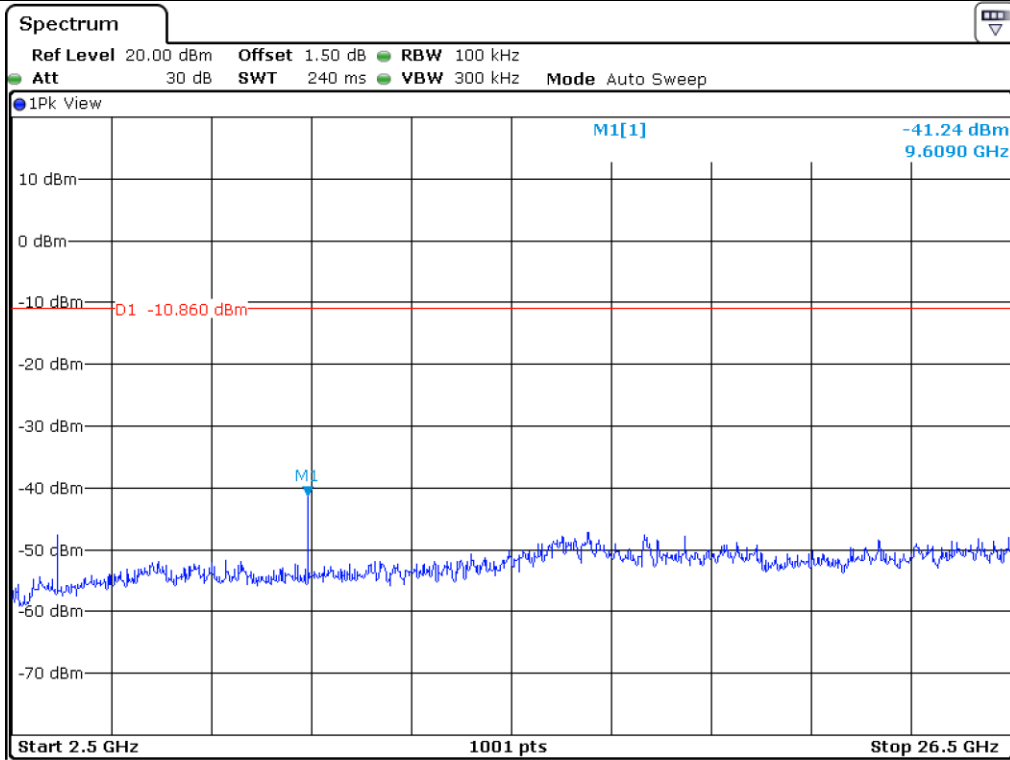


Low Channel

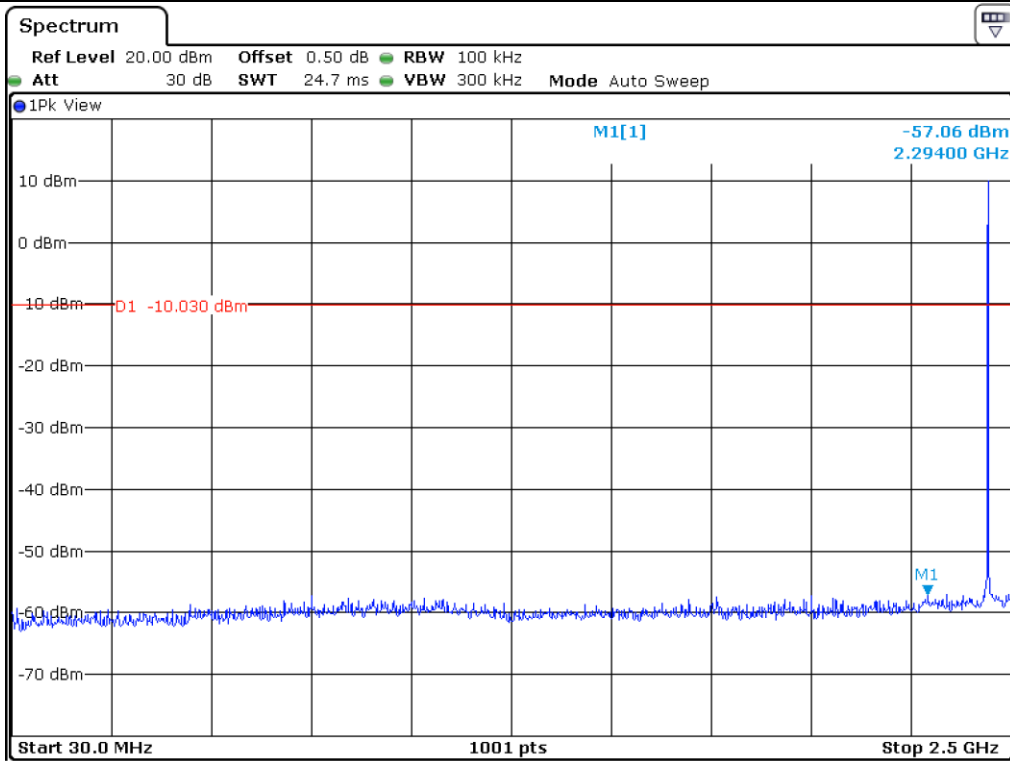


Middle Channel

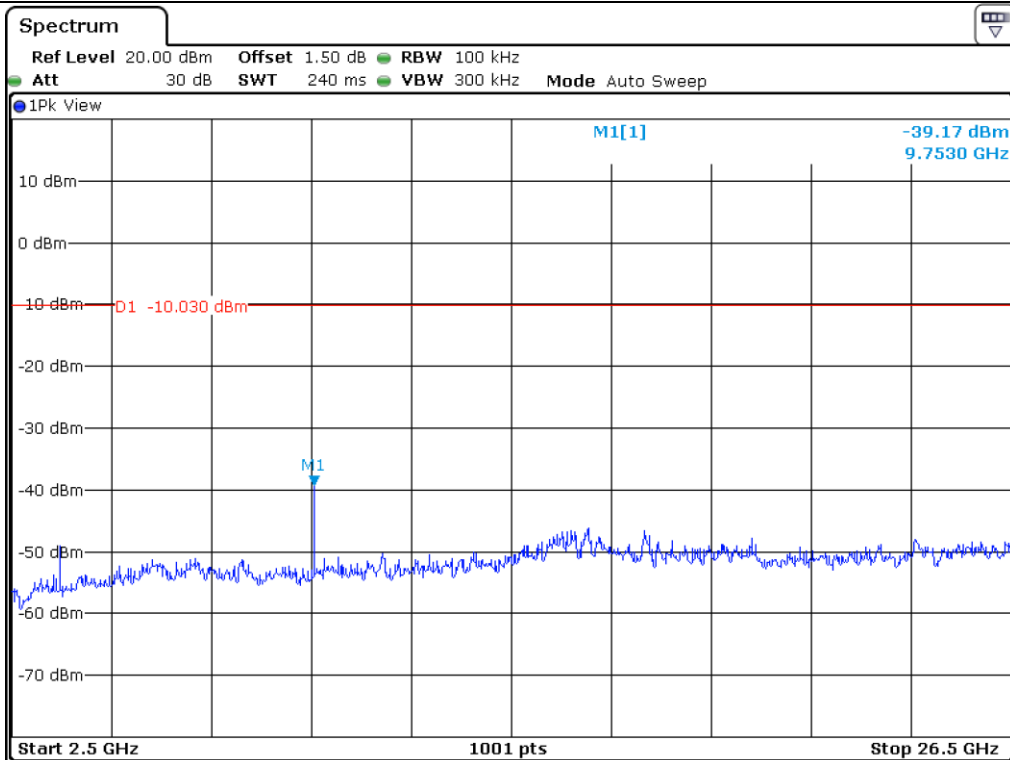

Middle Channel

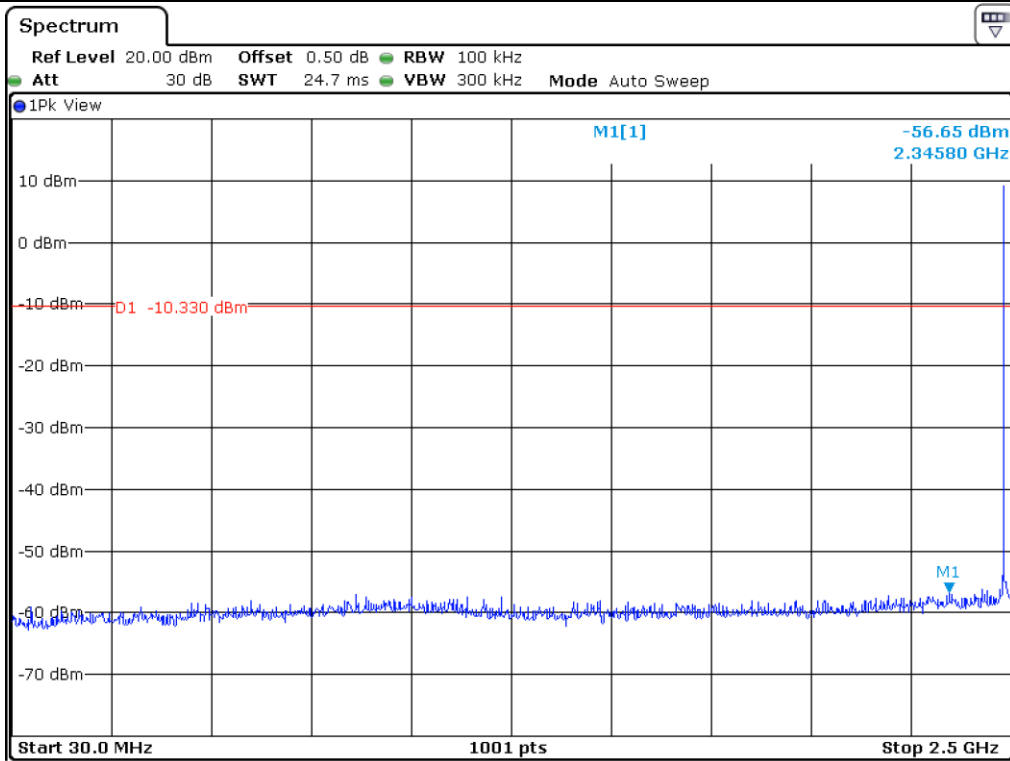


High Channel

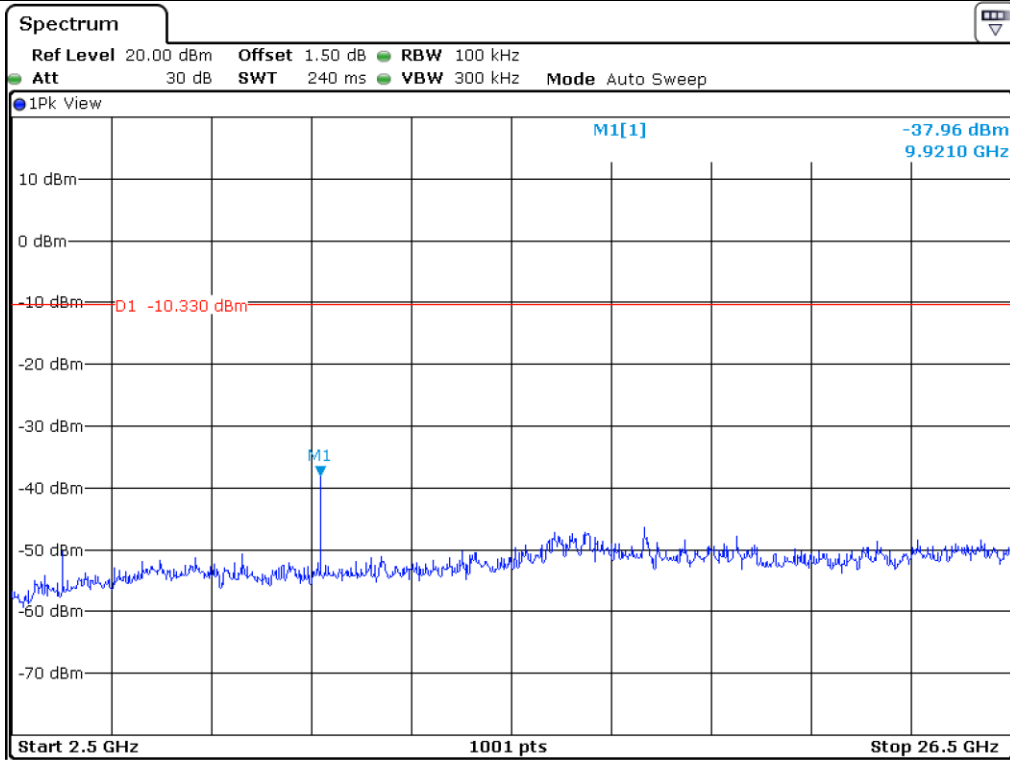


High Channel


12.5.2 Test data for 2 Mbps

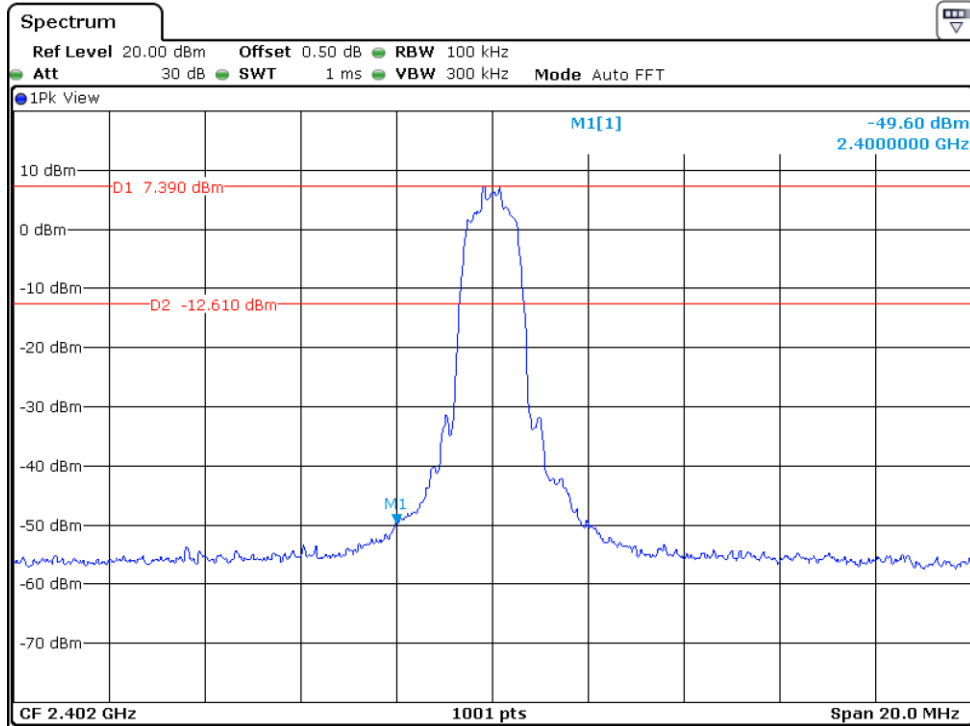


Low Channel

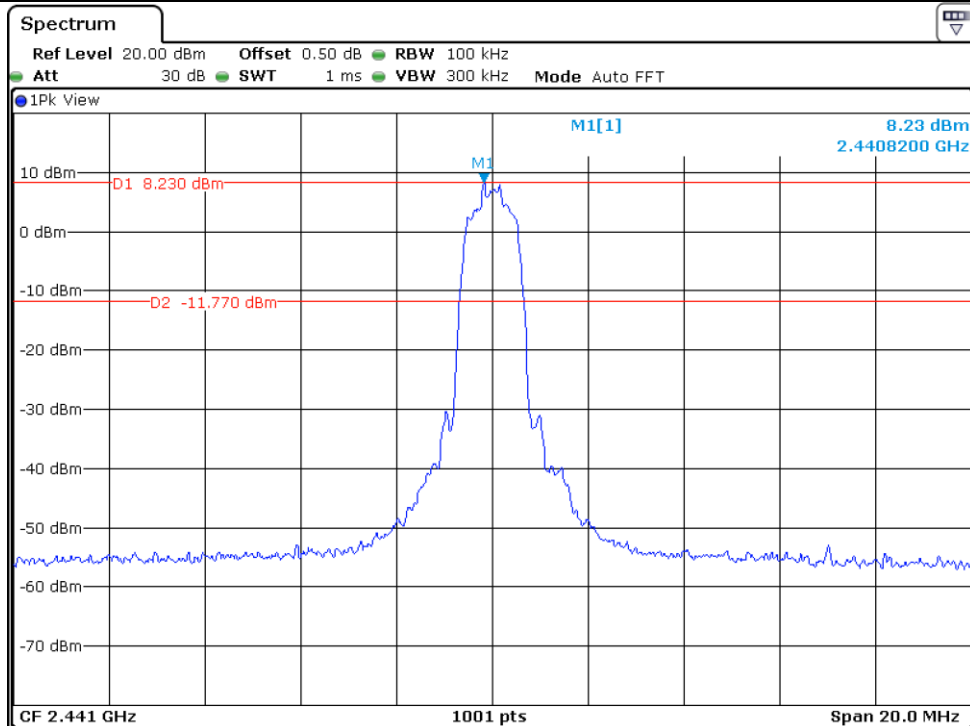


Middle Channel

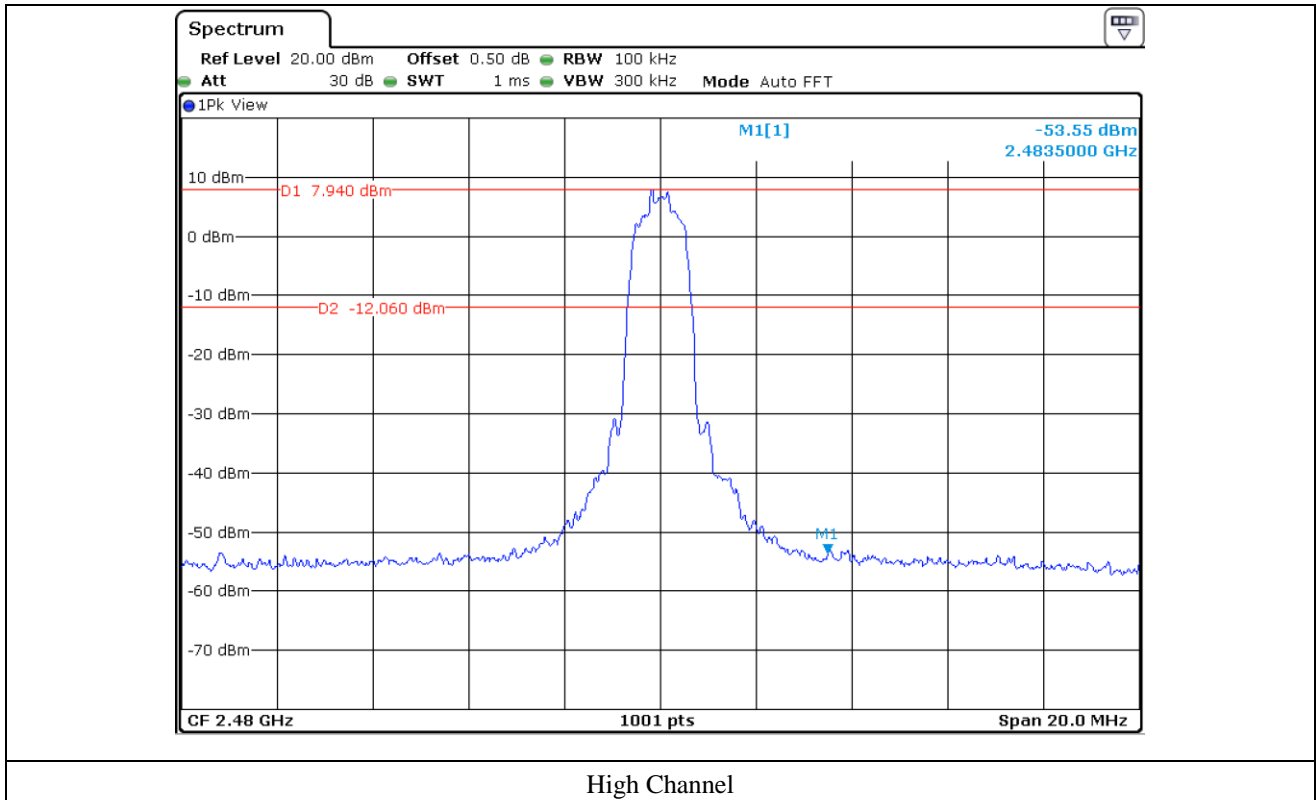


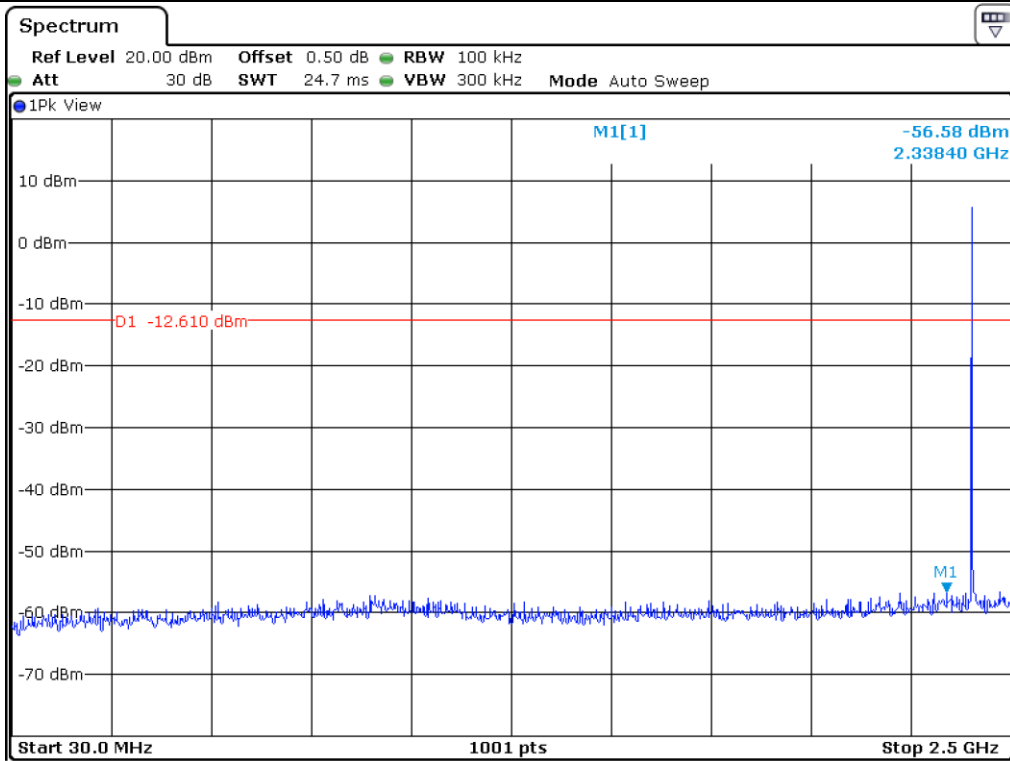


Low Channel

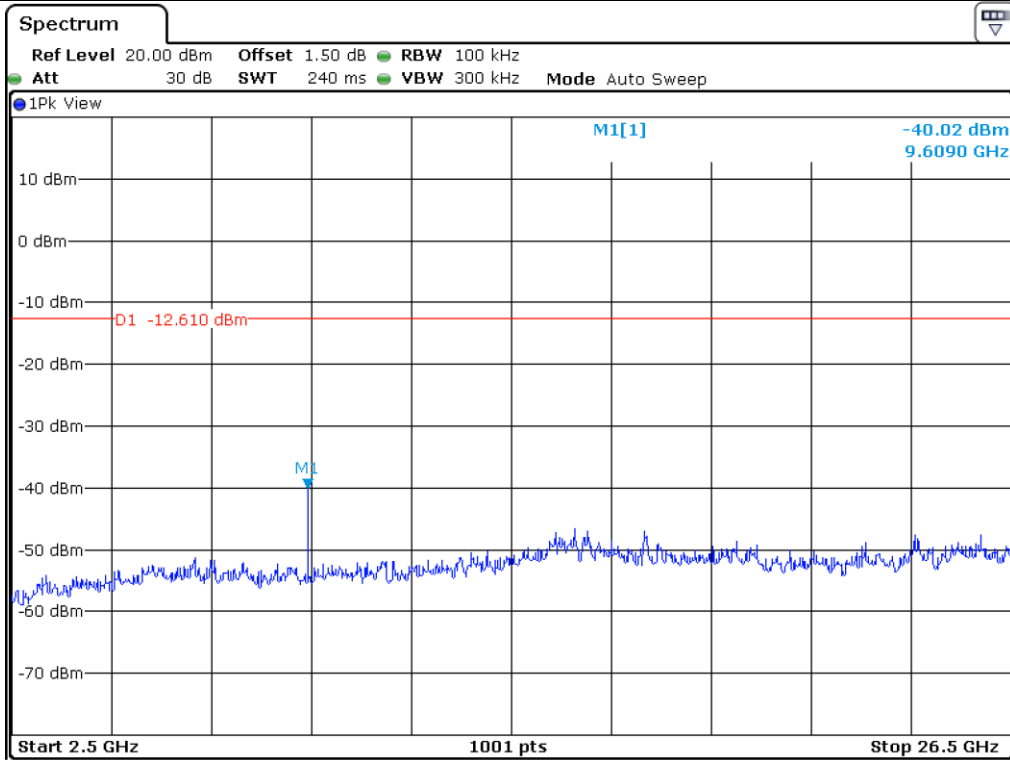


Low Channel

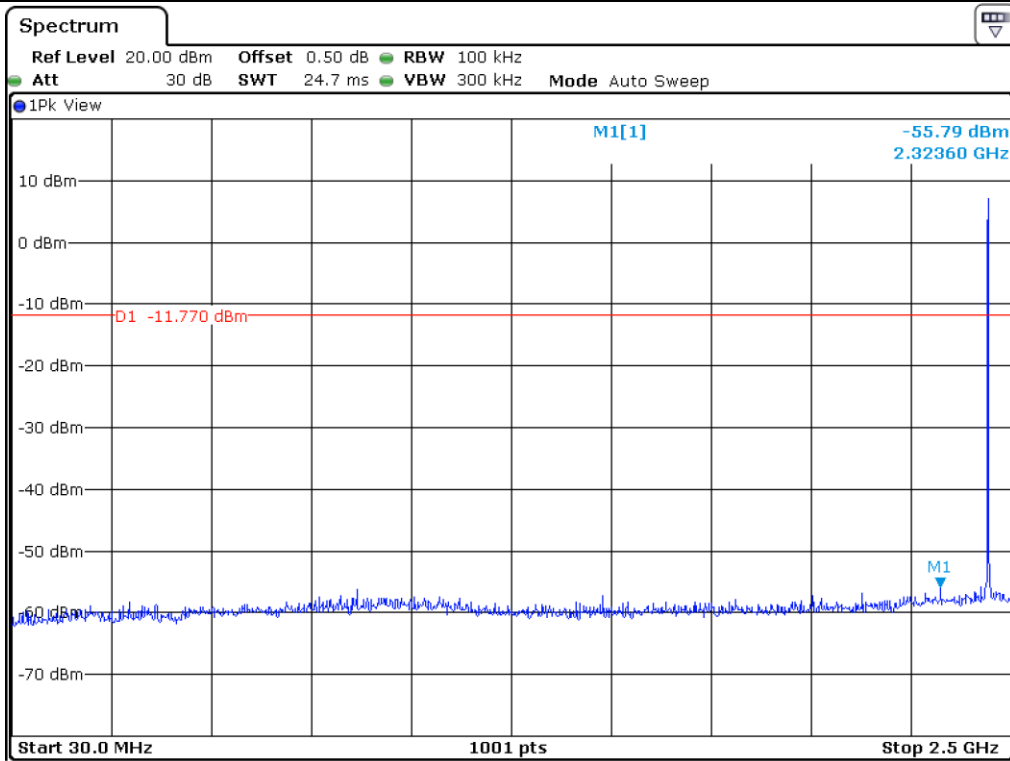


Middle Channel

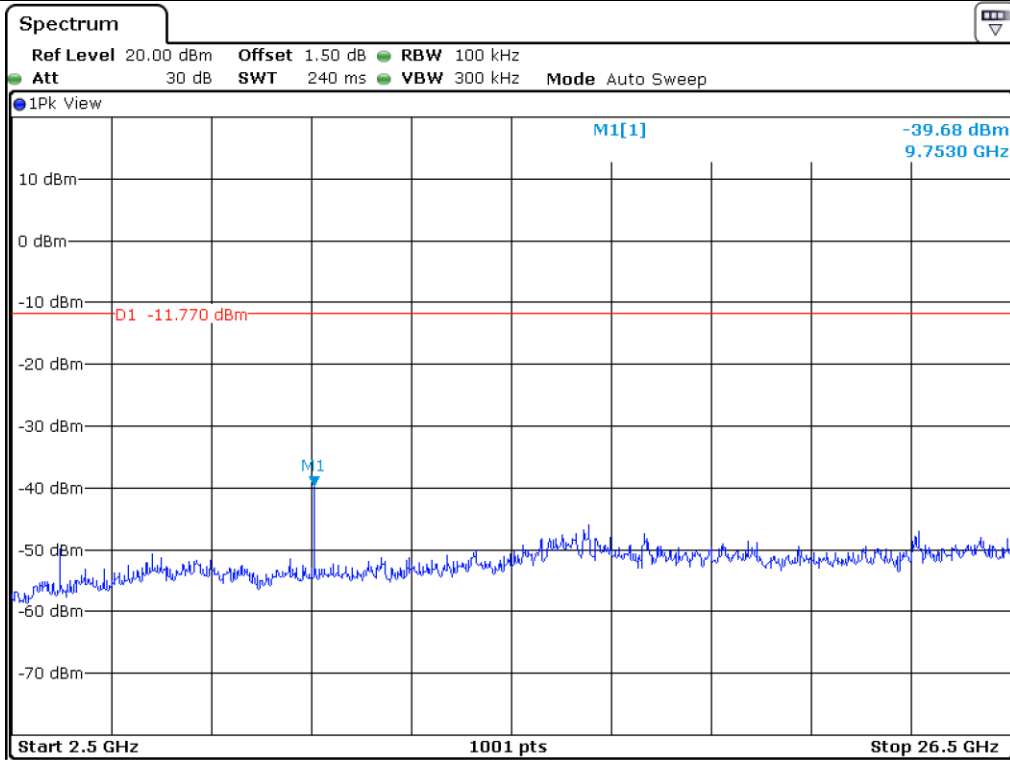

Middle Channel

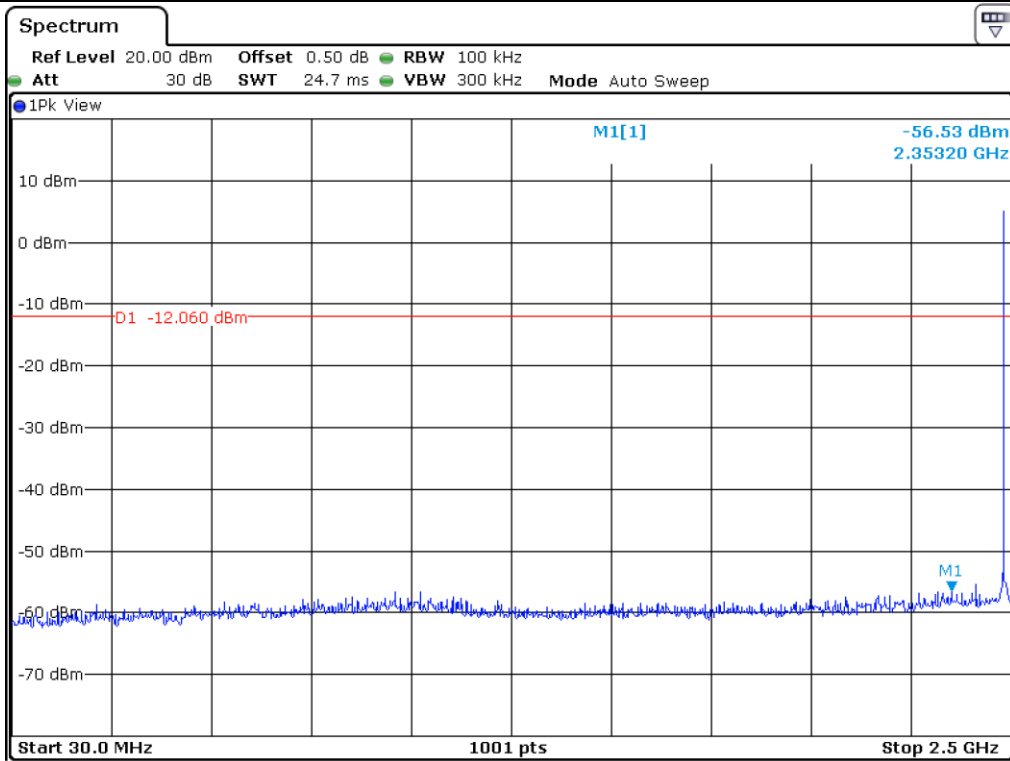


High Channel

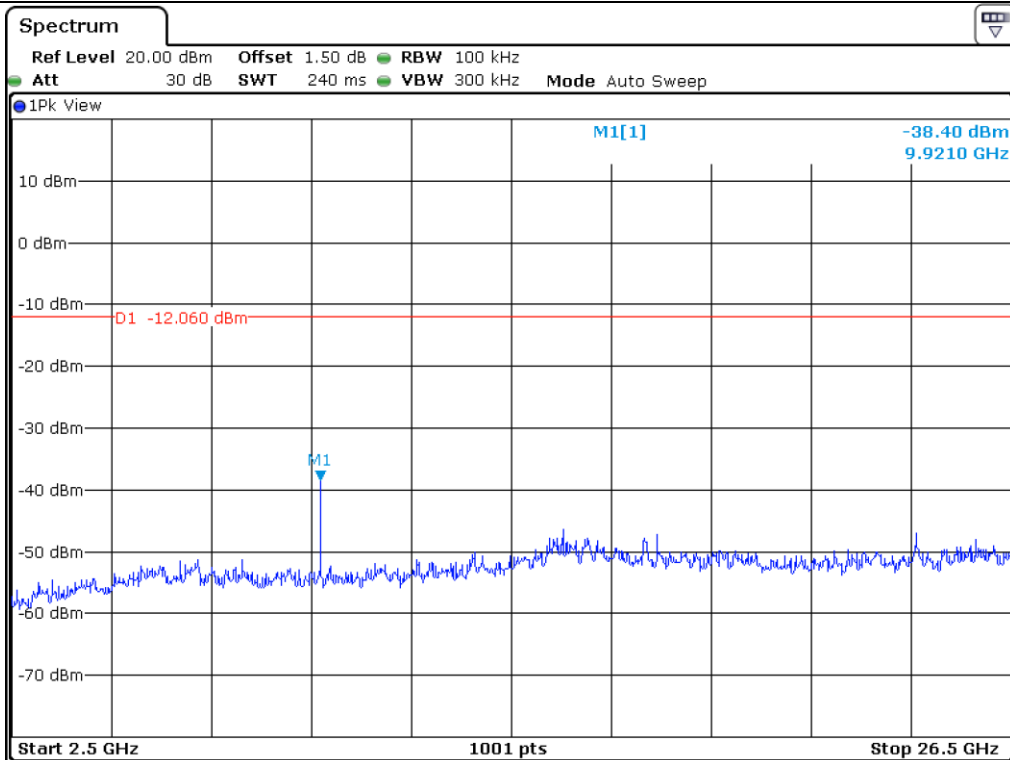


High Channel


12.5.3 Test data for 3 Mbps

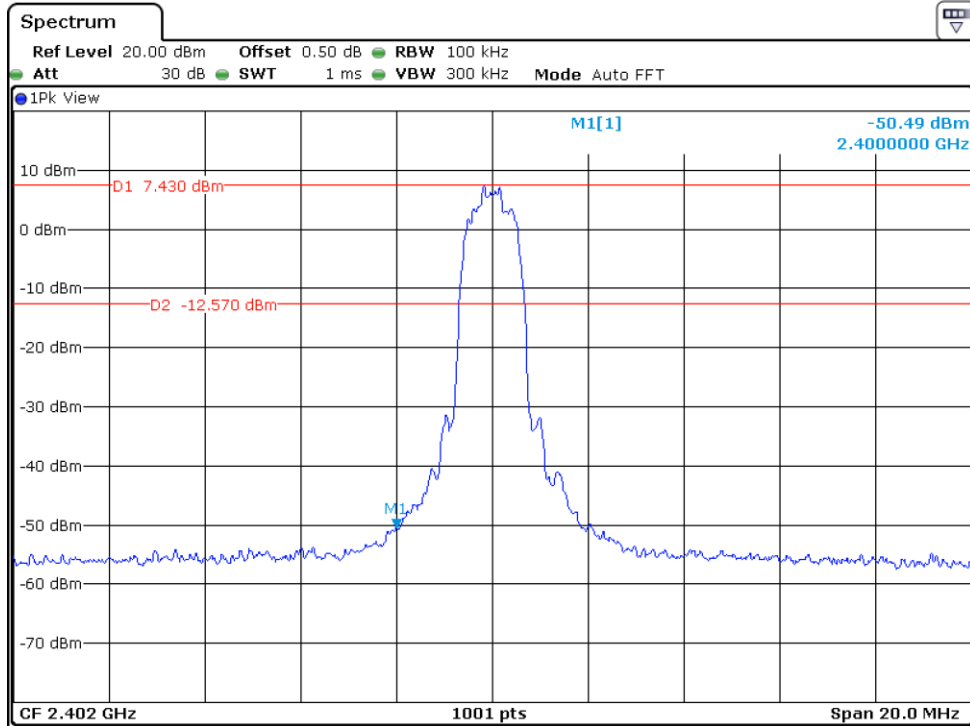


Low Channel

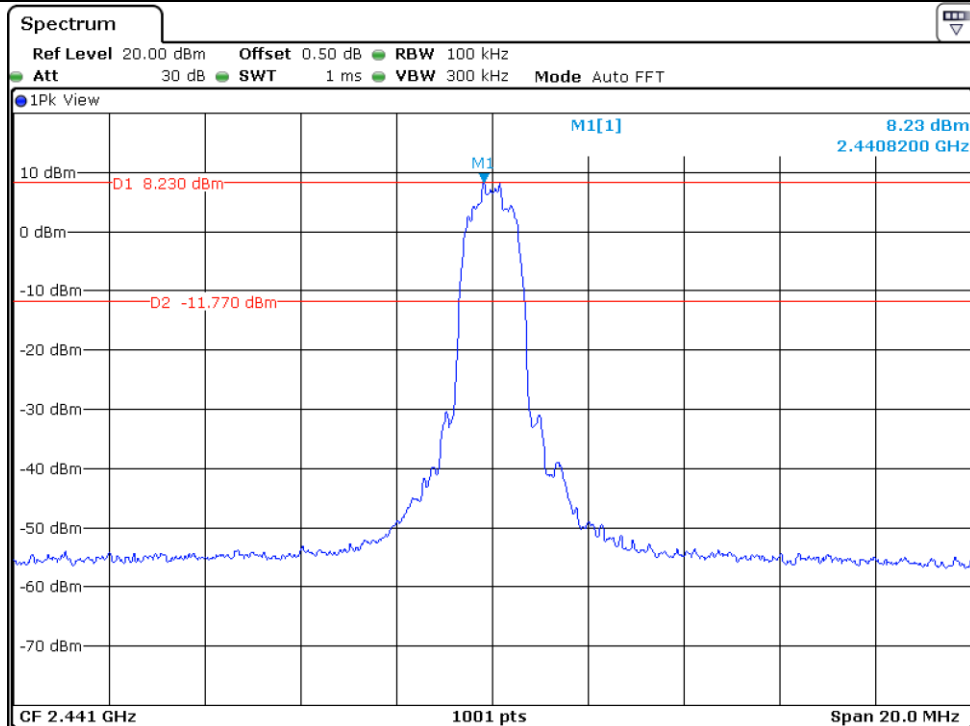


Middle Channel

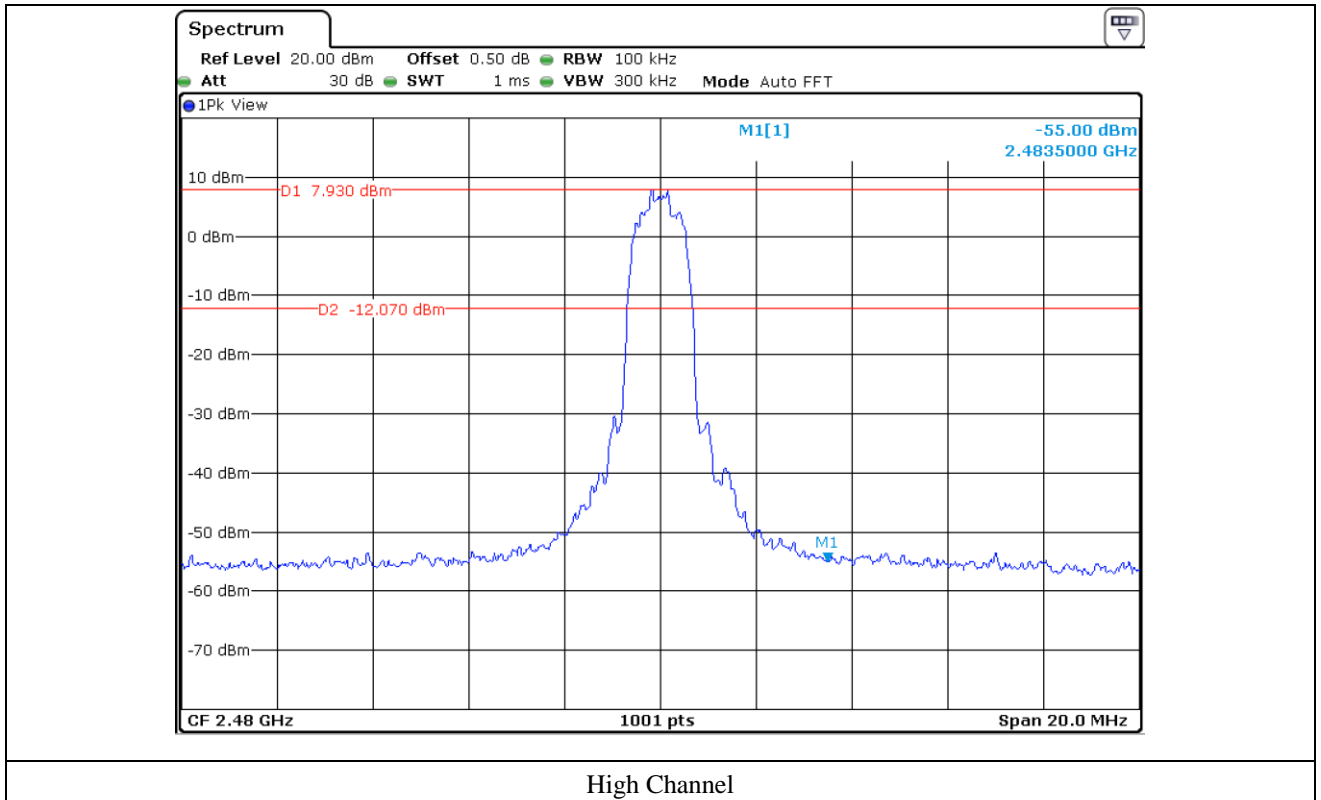


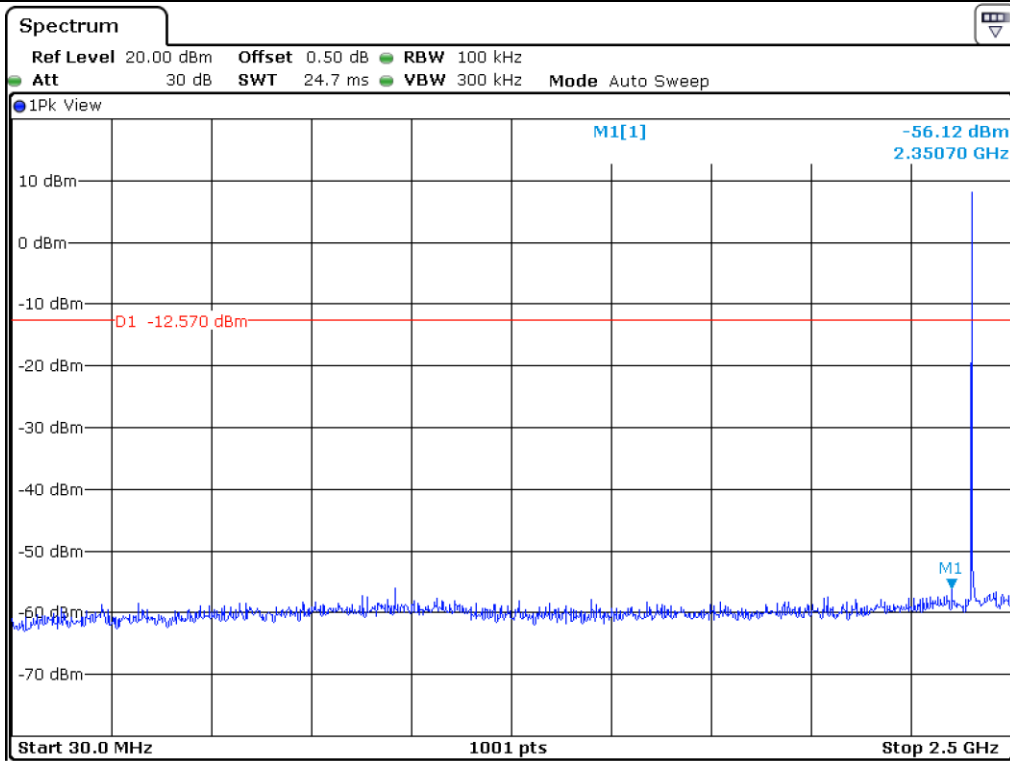


Low Channel

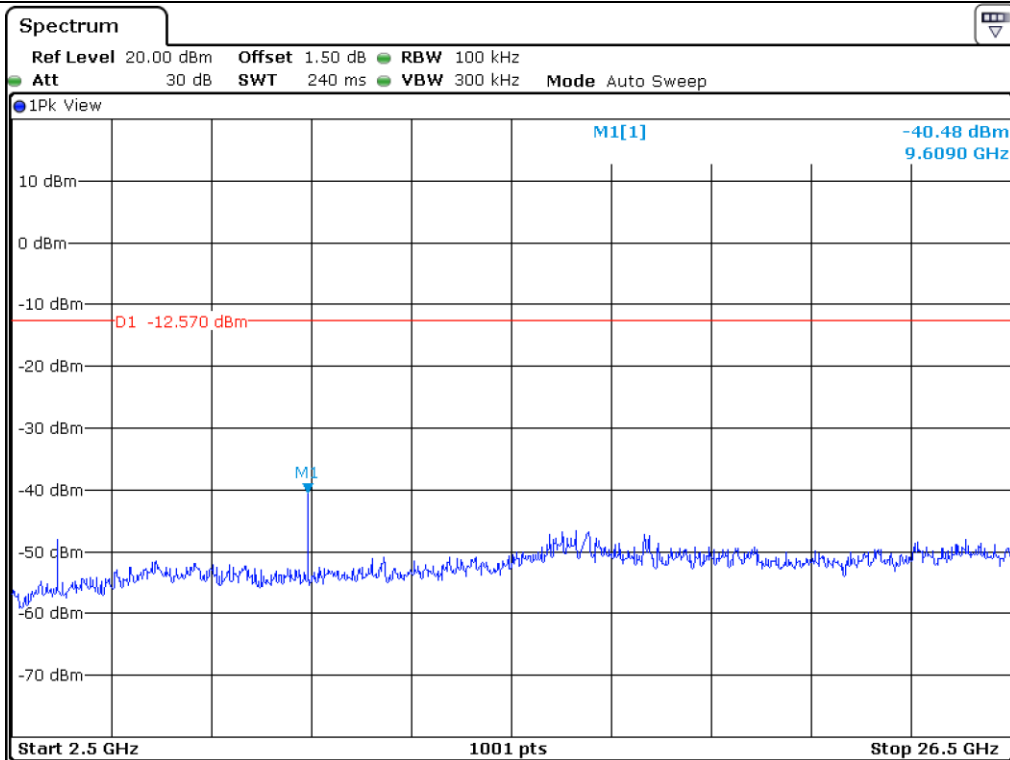


Low Channel

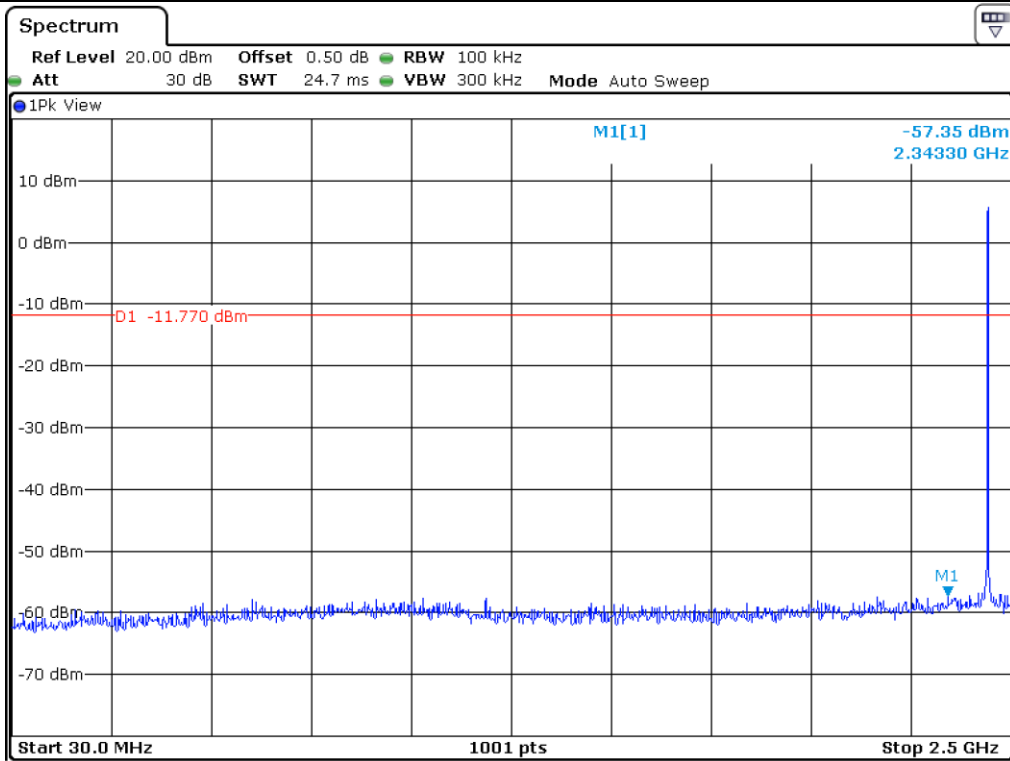


Middle Channel

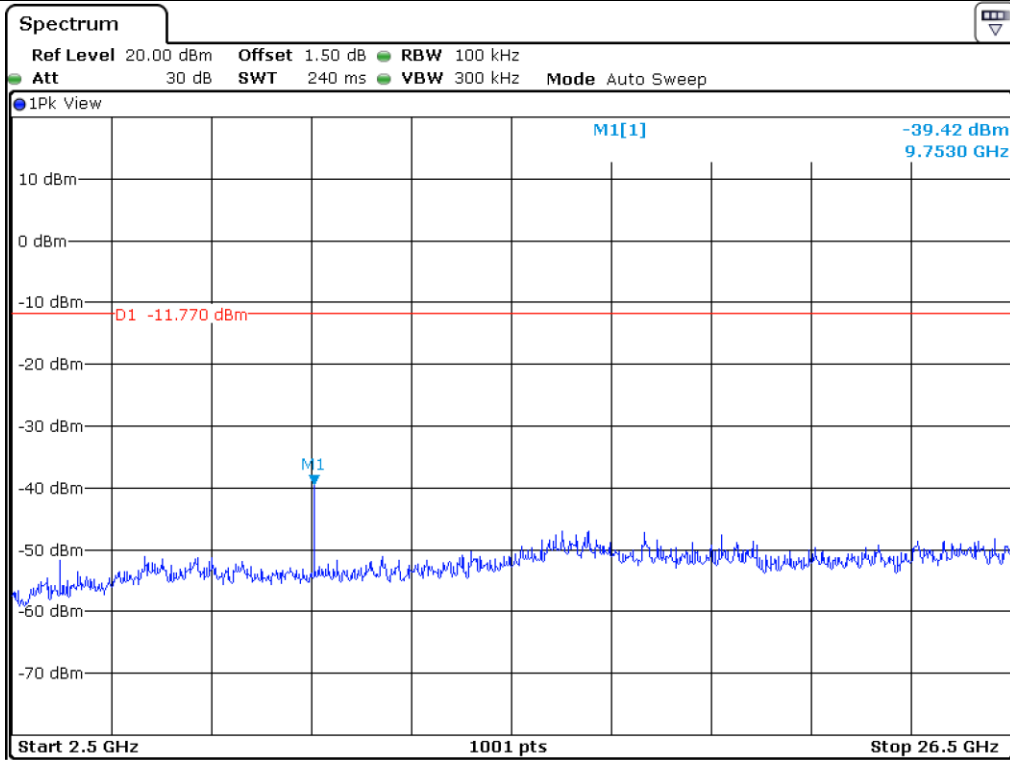

Middle Channel

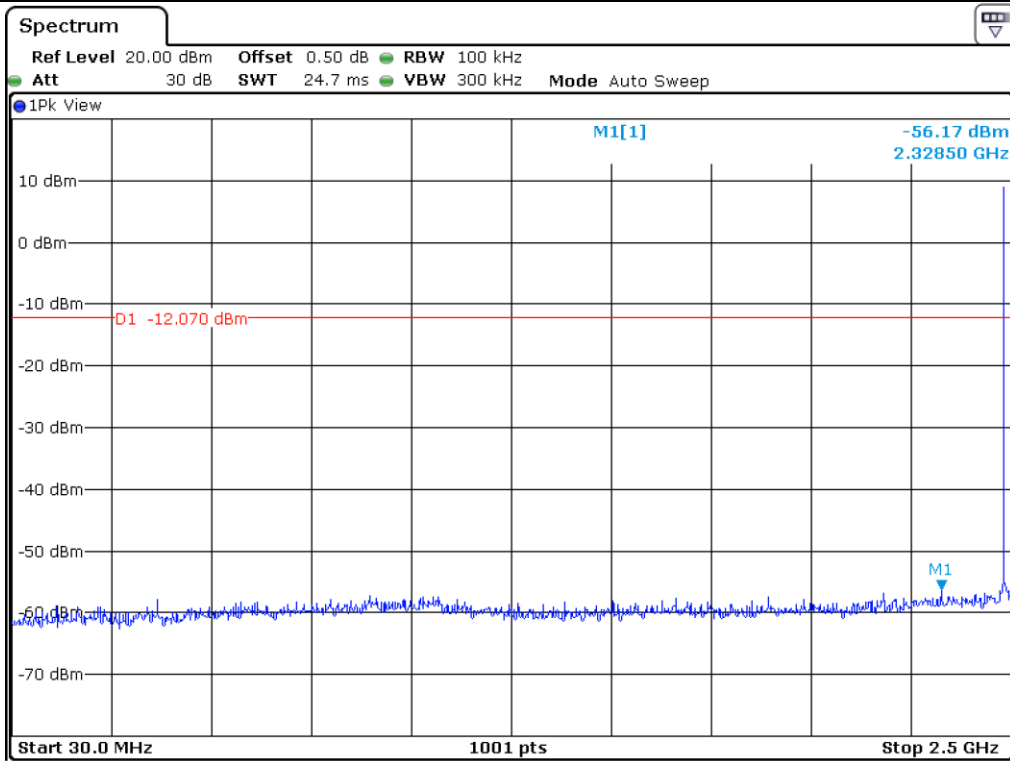

High Channel

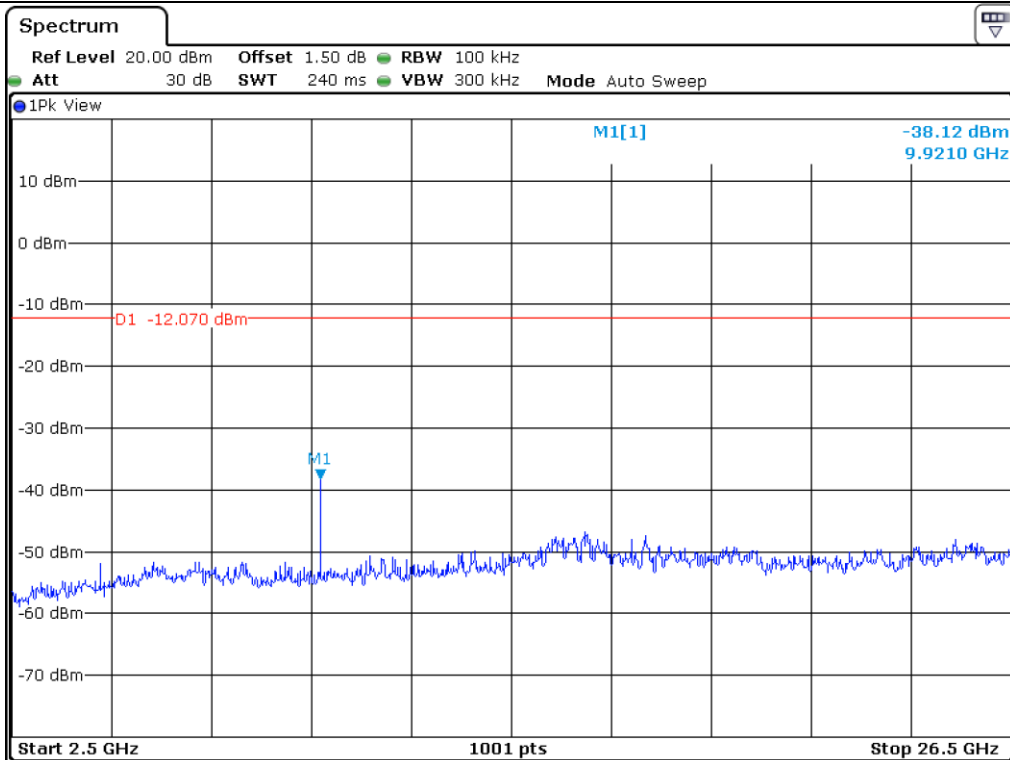

High Channel

12.6 Test data for Transmitting mode radiated emission

12.6.1 Radiated Emission which fall in the Restricted Band


12.6.1.1 Test data for 1 Mbps

- Test Date : September 28, 2018 ~ October 24, 2018
- Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode
1 MHz and RMS Detector for Average Mode
- Video bandwidth : 3 MHz for Peak and Average Mode
- Measurement distance : 3 m
- Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel									
2 348.162	45.51	Peak	H	26.94	9.20	34.76	46.89	74.00	27.11
2 346.484	32.54	Average	H	26.91	9.17	34.72	33.90	54.00	20.10
2 312.896	45.28	Peak	V	26.91	9.17	34.72	46.64	74.00	27.36
2 346.404	32.54	Average	V	26.91	9.17	34.72	33.90	54.00	20.10
Test Data for High Channel									
2 483.508	49.76	Peak	H	27.47	9.49	35.51	51.21	74.00	22.79
2 483.508	34.15	Average	H	27.47	9.49	35.51	35.60	54.00	18.40
2 483.508	45.61	Peak	V	27.48	9.49	35.52	47.06	74.00	26.94
2 483.508	32.82	Average	V	27.47	9.49	35.51	34.27	54.00	19.73

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical



Tested by: Tae-Ho, Kim / Senior Manager


12.6.1.2 Test data for 2 Mbps

- Test Date : September 28, 2018 ~ October 24, 2018
- Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode
1 MHz and RMS Detector for Average Mode
- Video bandwidth : 3 MHz for Peak and Average Mode
- Measurement distance : 3 m
- Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel									
2 319.151	44.87	Peak	H	26.94	9.20	34.76	46.25	74.00	27.75
2 389.960	32.87	Average	H	26.91	9.17	34.72	34.23	54.00	19.77
2 347.043	45.60	Peak	V	26.91	9.17	34.72	46.96	74.00	27.04
2 346.484	32.62	Average	V	26.91	9.17	34.72	33.98	54.00	20.02
Test Data for High Channel									
2 483.508	46.99	Peak	H	27.47	9.49	35.51	48.44	74.00	25.56
2 483.508	34.16	Average	H	27.47	9.49	35.51	35.61	54.00	18.39
2 489.508	45.50	Peak	V	27.48	9.49	35.52	46.95	74.00	27.05
2 483.508	32.83	Average	V	27.47	9.49	35.51	34.28	54.00	19.72

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical



Tested by: Tae-Ho, Kim / Senior Manager


12.6.1.3 Test data for 3 Mbps

- Test Date : September 28, 2018 ~ October 24, 2018
- Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode
1 MHz and RMS Detector for Average Mode
- Video bandwidth : 3 MHz for Peak and Average Mode
- Measurement distance : 3 m
- Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel									
2 312.517	45.02	Peak	H	26.94	9.20	34.76	46.40	74.00	27.60
2 389.960	32.88	Average	H	26.91	9.17	34.72	34.24	54.00	19.76
2 366.144	45.48	Peak	V	26.91	9.17	34.72	46.84	74.00	27.16
2 389.960	32.88	Average	V	26.91	9.17	34.72	34.24	54.00	19.76
Test Data for High Channel									
2 485.190	46.82	Peak	H	27.47	9.49	35.51	48.27	74.00	25.73
2 483.508	34.06	Average	H	27.47	9.49	35.51	35.51	54.00	18.49
2 497.931	45.69	Peak	V	27.48	9.49	35.52	47.14	74.00	26.86
2 483.508	32.68	Average	V	27.47	9.49	35.51	34.13	54.00	19.87

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical



Tested by: Tae-Ho, Kim / Senior Manager

12.6.2 Spurious & Harmonic Radiated Emission above 1 GHz

12.6.2.1 Test data for 1 Mbps

- Test Date : September 28, 2018 ~ October 24, 2018
- Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode for the emissions fall in restricted band,
1 MHz and RMS Detector for Average Mode for the emissions fall in restricted band
100 kHz for Peak Mode for the emissions outside restricted band
- Video bandwidth : 3 MHz for Peak and Average Mode
- Frequency range : 1 GHz ~ 26.5 GHz
- Measurement distance : 3 m
- Result : PASSED

Frequency (GHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel									
4 804.00	40.25	Peak	H	30.84	12.31	35.74	47.66	74.00	26.34
	30.62	Average	H				38.03	54.00	15.97
	41.02	Peak	V				48.43	74.00	25.57
	31.09	Average	V				38.50	54.00	15.50
Test Data for Middle Channel									
4 882.00	40.28	Peak	H	30.01	12.43	35.80	46.92	74.00	27.08
	32.64	Average	H				39.28	54.00	14.72
	42.82	Peak	V				49.46	74.00	24.54
	31.20	Average	V				37.84	54.00	16.16
Test Data for High Channel									
4 960.00	39.65	Peak	H	31.15	12.81	35.96	47.65	74.00	26.35
	31.22	Average	H				39.22	54.00	14.78
	40.28	Peak	V				48.28	74.00	25.72
	29.47	Average	V				37.47	54.00	16.53

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical, "*" Frequency fall in restricted band



Tested by: Tae-Ho, Kim / Senior Manager

12.6.2.2 Test data for 2 Mbps

- Test Date : September 28, 2018 ~ October 24, 2018
- Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode for the emissions fall in restricted band,
1 MHz and RMS Detector for Average Mode for the emissions fall in restricted band
100 kHz for Peak Mode for the emissions outside restricted band
- Video bandwidth : 3 MHz for Peak and Average Mode
- Frequency range : 1 GHz ~ 26.5 GHz
- Measurement distance : 3 m
- Result : PASSED

Frequency (GHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel									
4 804.00	42.17	Peak	H	30.84	12.31	35.74	49.58	74.00	24.42
	30.11	Average	H				37.52	54.00	16.48
	42.14	Peak	V				49.55	74.00	24.45
	31.61	Average	V				39.02	54.00	14.98
Test Data for Middle Channel									
4 882.00	40.11	Peak	H	30.01	12.43	35.80	46.75	74.00	27.25
	32.46	Average	H				39.10	54.00	14.90
	42.66	Peak	V				49.30	74.00	24.70
	32.64	Average	V				39.28	54.00	14.72
Test Data for High Channel									
4 960.00	40.95	Peak	H	31.15	12.81	35.96	48.95	74.00	25.05
	30.84	Average	H				38.84	54.00	15.16
	40.98	Peak	V				48.98	74.00	25.02
	29.66	Average	V				37.66	54.00	16.34

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical, "*" Frequency fall in restricted band



Tested by: Tae-Ho, Kim / Senior Manager

12.6.2.3 Test data for 3 Mbps

- Test Date : September 28, 2018 ~ October 24, 2018
- Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode for the emissions fall in restricted band,
1 MHz and RMS Detector for Average Mode for the emissions fall in restricted band
100 kHz for Peak Mode for the emissions outside restricted band
- Video bandwidth : 3 MHz for Peak and Average Mode
- Frequency range : 1 GHz ~ 26.5 GHz
- Measurement distance : 3 m
- Result : PASSED

Frequency (GHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel									
4 804.00	41.76	Peak	H	30.84	12.31	35.74	49.17	74.00	24.83
	30.51	Average	H				37.92	54.00	16.08
	42.09	Peak	V				49.50	74.00	24.50
	31.07	Average	V				38.48	54.00	15.52
Test Data for Middle Channel									
4 882.00	39.87	Peak	H	30.01	12.43	35.80	46.51	74.00	27.49
	32.52	Average	H				39.16	54.00	14.84
	41.94	Peak	V				48.58	74.00	25.42
	31.93	Average	V				38.57	54.00	15.43
Test Data for High Channel									
4 960.00	39.64	Peak	H	31.15	12.81	35.96	47.64	74.00	26.36
	31.13	Average	H				39.13	54.00	14.87
	40.21	Peak	V				48.21	74.00	25.79
	30.18	Average	V				38.18	54.00	15.82

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical, "*" Frequency fall in restricted band



Tested by: Tae-Ho, Kim / Senior Manager

13. RADIATED EMISSION TEST

13.1 Operating environment

Temperature : 25 °C
 Relative humidity : 46 % R.H.

13.2 Test set-up

The radiated emissions measurements were on the 3 m semi anechoic chamber. The EUT and other support equipment were placed on a non-conductive turntable above the ground plane. The interconnecting cables from outside test site were inserted into ferrite clamps at the point where the cables reach the turntable.

The frequency spectrum from 30 MHz to 26.5 GHz was scanned and emission levels maximized at each frequency recorded. The system was rotated 360°, and the antenna was varied in height between 1.0 m and 4.0 m in order to determine the maximum emission levels. This procedure was performed for both horizontal and vertical polarization of the receiving antenna.


13.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ - FSV40	Rohde & Schwarz	Signal Analyzer	101009	Mar. 14, 2018 (1Y)
■ - ESU	Rohde & Schwarz	EMI Test Receiver	100261	Mar. 29, 2018 (1Y)
■ - 310N	Sonoma Instrument	Pre-Amplifier	312544	Mar. 28, 2018 (1Y)
■ - BBV 9718 B	Schwarzbeck	Amplifier	009	Mar. 16, 2018 (1Y)
■ SCU40A	Rohde & Schwarz	Signal Conditioning unit	100436	Mar. 15, 2018 (1Y)
■ - DT3000-3t	Innco System	Turn Table	DT3000/093	N/A
■ - MA-4000XPET	Innco System	Antenna Master	MA4000/509	N/A
■ - VULB9163	Schwarzbeck	TRILOG Broadband Antenna	777	Apr. 13, 2018 (2Y)
■ - BBHA9120D	Schwarzbeck	Horn Antenna	BBHA9120D295	Aug. 16, 2017 (2Y)


All test equipment used is calibrated on a regular basis.

13.4 Test data for 30 MHz ~ 1 000 MHz

- Test Date : September 28, 2018 ~ October 24, 2018
- Resolution bandwidth : 120 kHz
- Frequency range : 30 MHz ~ 1 000 MHz
- Measurement distance : 3 m

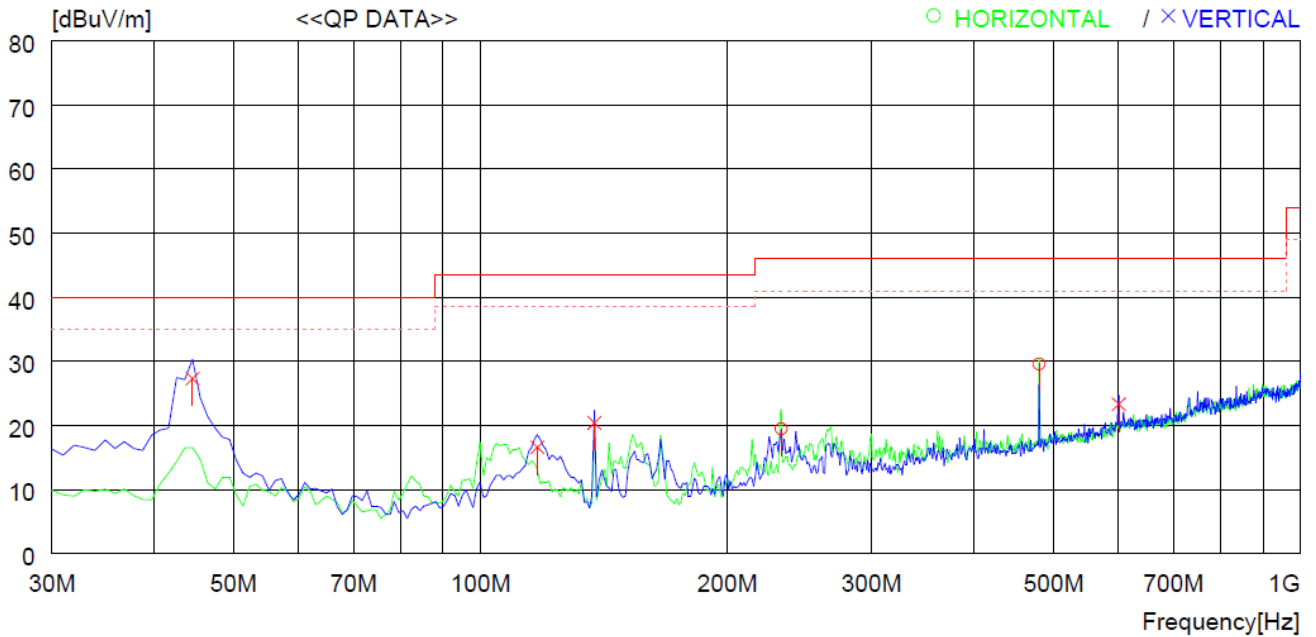

No.	FREQ [MHz]	READING QP [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	232.730	36.9	12.0	3.5	32.9	19.5	46.0	26.5	100	359
2	480.081	40.8	16.9	5.1	33.2	29.6	46.0	16.4	100	295
----- Vertical -----										
3	44.550	44.8	14.1	1.5	33.1	27.3	40.0	12.7	100	78
4	117.300	36.2	10.9	2.5	33.0	16.6	43.5	26.9	100	110
5	137.670	42.1	8.6	2.7	33.0	20.4	43.5	23.1	100	0
6	600.358	31.6	19.4	5.6	33.3	23.3	46.0	22.7	100	0


Tested by: Tae-Ho, Kim / Senior Manager

13.5 Test data for Below 30 MHz


- . Test Date : September 28, 2018 ~ October 24, 2018
- . Resolution bandwidth : 200 Hz (from 9 kHz to 0.15 MHz), 9 kHz (from 0.15 MHz to 30 MHz)
- . Frequency range : 9 kHz ~ 30 MHz
- . Measurement distance : 3 m

Frequency (MHz)	Reading (dB μ V)	Ant. Pol. (H/V)	Ant. Factor (dB/m)	Cable Loss	Amp Gain	Emission Level(dB μ V/m)	Limits (dB μ V/m)	Margin (dB)
It was not observed any emissions from the EUT.								

13.6 Test data for above 1 GHz

- . Test Date : September 28, 2018 ~ October 24, 2018
- . Resolution bandwidth : 1 MHz for Peak and Average Mode
- . Video bandwidth : 1 MHz for Peak Mode, 10 Hz for Average Mode
- . Frequency range : 1 GHz ~ 26.5 GHz
- . Measurement distance : 3 m

Frequency (MHz)	Reading (dB μ V)	Ant. Pol. (H/V)	Ant. Factor (dB/m)	Cable Loss	Amp Gain	Emission Level(dB μ V/m)	Limits (dB μ V/m)	Margin (dB)
It was not observed any emissions from the EUT.								



 Tested by: Tae-Ho, Kim / Senior Manager

14. CONDUCTED EMISSION TEST

14.1 Operating environment

Temperature : 25 °C
 Relative humidity : 46 % R.H.

14.2 Test set-up

The EUT was placed on a wooden table, 0.8 m height above the floor. Power was fed to the EUT through a 50 Ω / 50 μH + 5 Ω Artificial Mains Network (AMN). The ground plane was electrically bonded to the reference ground system and all power lines were filtered from ambient.


14.3 Test equipment used

	Model Number	Manufacturer	Description	Serial Number	Last Cal. (Interval)
■ -	ESCI	Rohde & Schwarz	Test Receiver	101012	Oct. 22, 2018 (1Y)
□ -	ESHS10	Rohde & Schwarz	Test Receiver	834467/007	Mar. 29, 2018 (1Y)
□ -	NSLK8128	Schwarzbeck	AMN	8128-216	Mar. 29, 2018 (1Y)
■ -	NSLK8126	Schwarzbeck	AMN	8126-404	Apr. 04, 2018 (1Y)
□ -	3825/2	EMCO	AMN	9109-1869	Apr. 11, 2018 (1Y)
■ -	3825/2	EMCO	AMN	9109-1867	Mar. 28, 2018 (1Y)

All test equipment used is calibrated on a regular basis.


14.4 Test data

- Test Date : September 28, 2018 ~ October 24, 2018
- Resolution bandwidth : 9 kHz
- Frequency range : 0.15 MHz ~ 30 MHz
- Tested Line : HOT LINE

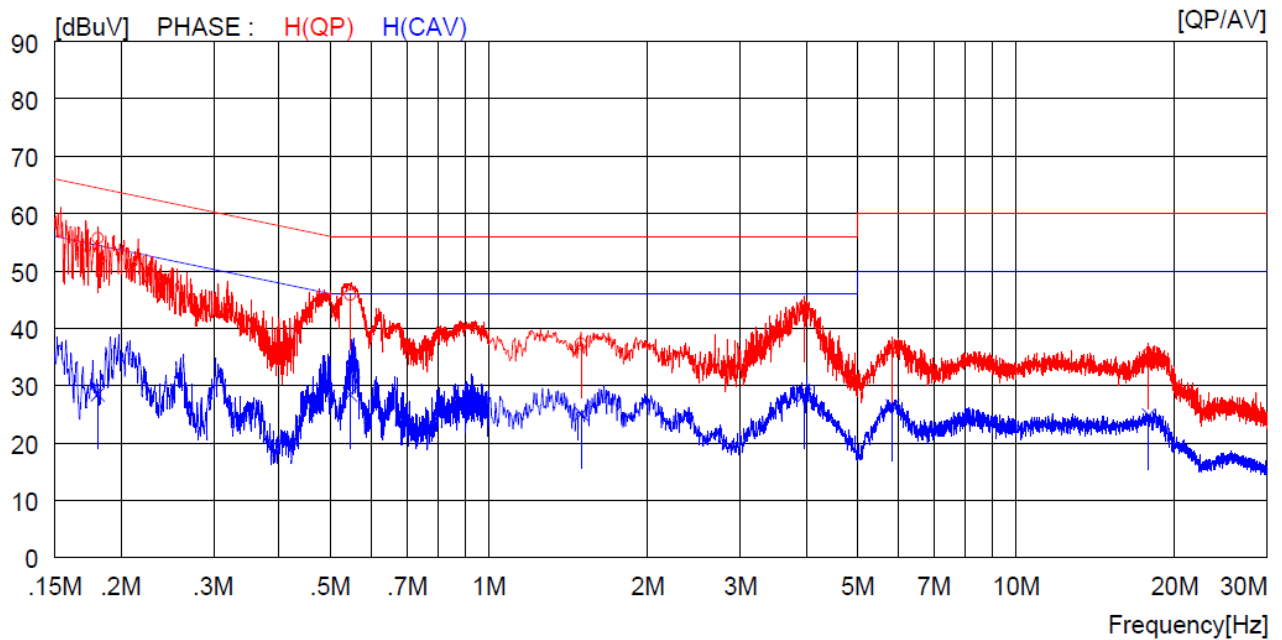

NO	FREQ [MHz]	READING		C.FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	
1	0.18100	45.8	----	9.9	55.7	----	64.4	----	8.7	----	H(QP)
2	0.54500	35.8	----	10.0	45.8	----	56.0	----	10.2	----	H(QP)
3	1.49600	27.3	----	10.0	37.3	----	56.0	----	18.7	----	H(QP)
4	3.96400	33.4	----	10.2	43.6	----	56.0	----	12.4	----	H(QP)
5	5.82500	26.3	----	10.2	36.5	----	60.0	----	23.5	----	H(QP)
6	17.85000	25.0	----	10.4	35.4	----	60.0	----	24.6	----	H(QP)
7	0.18100	----	18.6	9.9	----	28.5	----	54.4	----	25.9	H(CAV)
8	0.54500	----	18.5	10.0	----	28.5	----	46.0	----	17.5	H(CAV)
9	1.49600	----	15.1	10.0	----	25.1	----	46.0	----	20.9	H(CAV)
10	3.96400	----	18.2	10.2	----	28.4	----	46.0	----	17.6	H(CAV)
11	5.82500	----	16.2	10.2	----	26.4	----	50.0	----	23.6	H(CAV)
12	17.85000	----	14.4	10.4	----	24.8	----	50.0	----	25.2	H(CAV)

-. Tested Line : NEUTRAL LINE

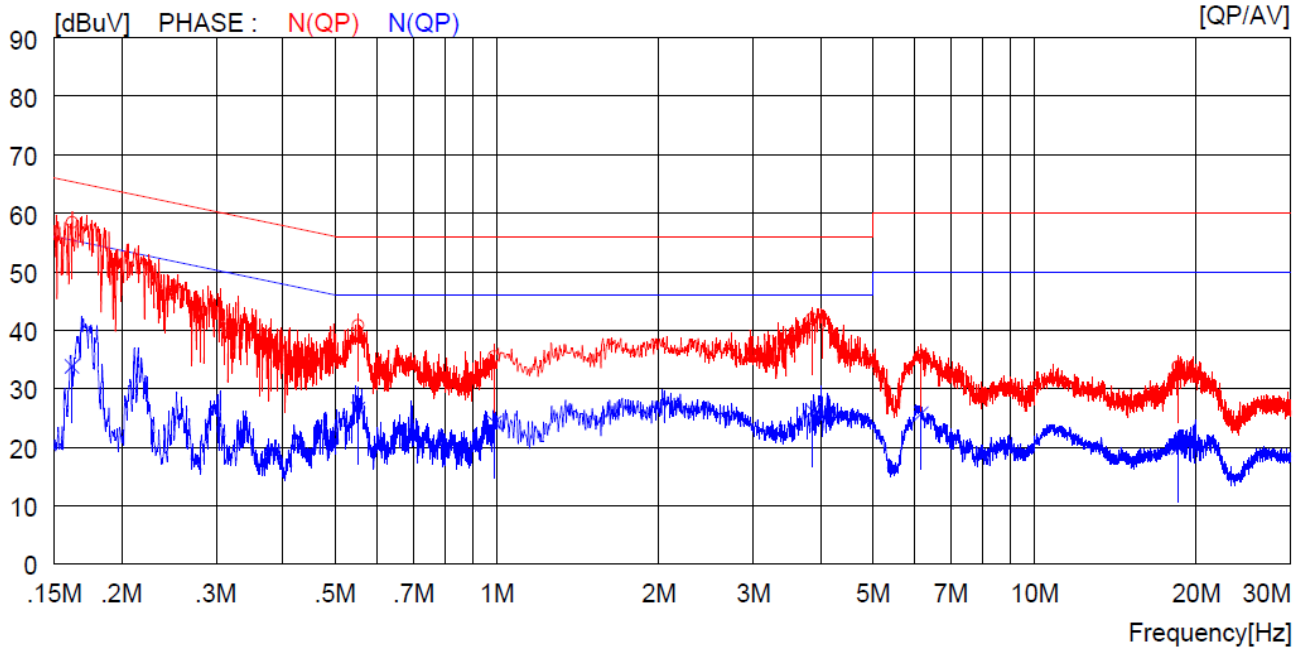

NO	FREQ [MHz]	READING		C. FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	
1	0.16200	48.5	----	9.9	58.4	----	65.4	----	7.0	----	N (QP)
2	0.55100	30.8	----	10.0	40.8	----	56.0	----	15.2	----	N (QP)
3	0.98900	25.4	----	10.0	35.4	----	56.0	----	20.6	----	N (QP)
4	3.86000	31.8	----	10.2	42.0	----	56.0	----	14.0	----	N (QP)
5	6.15500	25.4	----	10.2	35.6	----	60.0	----	24.4	----	N (QP)
6	18.54000	23.3	----	10.4	33.7	----	60.0	----	26.3	----	N (QP)
7	0.16200	----	23.9	9.9	----	33.8	----	55.4	----	21.6	N (CAV)
8	0.55100	----	16.5	10.0	----	26.5	----	46.0	----	19.5	N (CAV)
9	0.98900	----	14.2	10.0	----	24.2	----	46.0	----	21.8	N (CAV)
10	3.86000	----	16.0	10.2	----	26.2	----	46.0	----	19.8	N (CAV)
11	6.15500	----	15.5	10.2	----	25.7	----	50.0	----	24.3	N (CAV)
12	18.54000	----	9.6	10.4	----	20.0	----	50.0	----	30.0	N (CAV)

Remark: Margin (dB) = Limit – Level (Result)

The emission level in above table is included the transducer factor that means insertion loss (LISN), cable loss and attenuator.

Tested by: Tae-Ho, Kim / Senior Manager