

# HCT CO., LTD.

## CERTIFICATE OF COMPLIANCE FCC Certification

**Applicant Name:**  
SAMSUNG Electronics Co., Ltd.

**Address:**  
129, Samsung-ro, Yeongtong-gu Suwon-si,  
Gyeonggi-do, 443-742 Rep. of Korea

**Date of Issue:**

June 18, 2014

**Test Site/Location:**

HCT CO., LTD., 74, Seoicheon-ro 578beon-gil, Majang-myeo, Icheon-si, Gyeonggi-do, Korea

**Report No.:** HCT-R-1406-F027

**HCT FRN:** 0005866421

**IC Recognition No.:** 5944A-3

<b>FCC ID</b>	<b>: A3LWEA412I</b>
<b>IC</b>	<b>: 649E-WEA412I</b>
<b>APPLICANT</b>	<b>: SAMSUNG Electronics Co., Ltd.</b>

**FCC/ IC Model(s):** WEA412i

**EUT Type:** WLAN Access Point

**Port 0**  
**Max. RF Output Power:** Wi-Fi 802.11a (5180~5240) (7.52 dBm)/ Wi-Fi 802.11n\_20 MHz BW (5180~5240) (7.58 dBm)/  
Wi-Fi 802.11n\_40 MHz BW(5190~5230) (10.48 dBm)/ Wi-Fi 802.11ac\_20 MHz BW (5180~5240) (7.87 dBm)  
Wi-Fi 802.11ac\_40 MHz BW (5190~5230) (9.40 dBm)/ Wi-Fi 802.11ac\_80 MHz BW (5210) (6.76 dBm)

**Port 1**  
**Max. RF Output Power:** Wi-Fi 802.11a (5180~5240) (7.30 dBm)/ Wi-Fi 802.11n\_20 MHz BW (5180~5240) (7.67 dBm)/  
Wi-Fi 802.11n\_40 MHz BW(5190~5230) (10.15 dBm)/ Wi-Fi 802.11ac\_20 MHz BW (5180~5240) (7.79 dBm)  
Wi-Fi 802.11ac\_40 MHz BW (5190~5230) (9.48 dBm)/ Wi-Fi 802.11ac\_80 MHz BW (5210) (6.55 dBm)

**Frequency Range:**  
20 MHz BW: 5180 MHz - 5240 MHz (UNII 1)  
40 MHz BW: 5190 MHz - 5230 MHz (UNII 1)  
80 MHz BW: 5210 MHz (UNII 1)

**Modulation type** OFDM

**FCC Classification:** Unlicensed National Information Infrastructure(UNII)

**FCC Rule Part(s):** Part 15.407

**IC Rule :** RSS-GEN Issue 3(December 2010), RSS-210 Issue 8(December 2010)

**Engineering Statement:**

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998,21 U.S. C.853(a)



**Report prepared by**  
**: Jong Seok Lee**  
**Test engineer of RF Team**



**Approved by**  
**: Chang Seok Choi**  
**Manager of RF Team**

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

FCC PT.15.407 TEST REPORT	FCC & IC CERTIFICATION REPORT			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCT-R-1406-F027	Date of Issue: June 18, 2014	EUT Type: WLAN Access Point	FCC ID: A3LWEA412I	IC: 649E-WEA412I

# Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-R-1406-F027	June 18, 2014	- First Approval Report

# Table of Contents

1. GENERAL INFORMATION .....	4
2. EUT DESCRIPTION .....	4
2.1 EUT OPERATING MODE .....	5
3. TEST METHODOLOGY .....	6
3.1 EUT CONFIGURATION .....	6
3.2 EUT EXERCISE .....	6
3.3 GENERAL TEST PROCEDURES .....	6
3.4 DESCRIPTION OF TEST MODES .....	6
4. INSTRUMENT CALIBRATION.....	7
5. FACILITIES AND ACCREDITATIONS .....	7
5.1 FACILITIES .....	7
5.2 EQUIPMENT .....	7
6. ANTENNA REQUIREMENTS .....	8
7. SUMMARY OF TEST RESULTS .....	9
7.1 FCC Part .....	9
7.2 IC Part .....	10
8. TEST RESULT .....	11
8.1 DUTY CYCLE.....	11
8.2 26 dB BANDWIDTH MEASUREMENT .....	14
8.3 99% BANDWIDTH MEASUREMENT .....	25
8.4 OUTPUT POWER MEASUREMENT AND E.I.R.P. ....	36
8.5 POWER SPECTRAL DENSITY .....	60
8.6 PEAK EXCURSION RATIO .....	71
8.7 FREQUENCY STABILITY. ....	86
8.8 RADIATED MEASUREMENT.....	89
8.8.1 RADIATED SPURIOUS EMISSIONS.....	89
8.8.2 RADIATED RESTRICTED BAND EDGE MEASUREMENTS .....	106
8.8.3 RECEIVER SPURIOUS EMISSIONS.....	110
8.9 POWERLINE CONDUCTED EMISSIONS .....	111
9. LIST OF TEST EQUIPMENT .....	116
9.1 LIST OF TEST EQUIPMENT(Conducted Test) .....	116
9.2 LIST OF TEST EQUIPMENT(Radiated Test).....	117

FCC PT.15.407 TEST REPORT	FCC & IC CERTIFICATION REPORT			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCT-R-1406-F027	Date of Issue: June 18, 2014	EUT Type: WLAN Access Point	FCC ID: A3LWEA412I	IC: 649E-WEA412I



## 1. GENERAL INFORMATION

**Applicant:** SAMSUNG Electronics Co., Ltd.  
**Address:** 129, Samsung-ro, Yeongtong-gu Suwon-si, Gyeonggi-do, 443-742 Rep. of Korea  
**FCC ID:** A3LWEA412I  
**IC:** 649E-WEA412I  
**EUT Type:** WLAN Access Point  
**FCC/ IC Model name(s):** WEA412i  
**Date(s) of Tests:** May 15, 2014 ~ May 30, 2014  
**Place of Tests:** HCT Co., Ltd.  
 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Korea.  
 (IC Recognition No. : 5944A-3)

## 2. EUT DESCRIPTION

<b>EUT Type</b>	WLAN Access Point	
<b>FCC/ IC Model Name</b>	WEA412i	
<b>Power Supply</b>	AC adaptor : 100 V ~ 240 V, POE : DC 48 V	
<b>Frequency Range</b>	TX_20 MHz BW: 40 MHz BW: 80 MHz BW: RX_20 MHz BW: 40 MHz BW: 80 MHz BW:	5180 MHz - 5240 MHz (UNII 1) 5190 MHz - 5230 MHz (UNII 1) 5210 MHz (UNII 1) 5180 MHz - 5240 MHz (UNII 1) 5190 MHz - 5230 MHz (UNII 1) 5210 MHz (UNII 1)
<b>Port 0 Max. RF Output Power</b>	Wi-Fi 802.11a (5180~5240) (7.52 dBm)/ Wi-Fi 802.11n_20 MHz BW (5180~5240) (7.58 dBm)/ Wi-Fi 802.11n_40 MHz BW(5190~5230) (10.48 dBm)/ Wi-Fi 802.11ac_20 MHz BW (5180~5240) (7.87 dBm) Wi-Fi 802.11ac_40 MHz BW (5190~5230) (9.40 dBm)/ Wi-Fi 802.11ac_80 MHz BW (5210) (6.76 dBm)	
<b>Port 1 Max. RF Output Power</b>	Wi-Fi 802.11a (5180~5240) (7.30 dBm)/ Wi-Fi 802.11n_20 MHz BW (5180~5240) (7.67 dBm)/ Wi-Fi 802.11n_40 MHz BW(5190~5230) (10.15 dBm)/ Wi-Fi 802.11ac_20 MHz BW (5180~5240) (7.79 dBm) Wi-Fi 802.11ac_40 MHz BW (5190~5230) (9.48 dBm)/ Wi-Fi 802.11ac_80 MHz BW (5210) (6.55 dBm)	
<b>Modulation Type</b>	OFDM(802.11a, 802.11n, 802.11ac)	
<b>Antenna Specification</b>	Manufacturer: ACE Technologyacetchnology Antenna type: Internal Antenna Peak Gain : cf. Section 6	

<b>FCC PT.15.407 TEST REPORT</b>	<b>FCC &amp; IC CERTIFICATION REPORT</b>			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
<b>Test Report No.</b> HCT-R-1406-F027	<b>Date of Issue:</b> June 18, 2014	<b>EUT Type:</b> WLAN Access Point	<b>FCC ID:</b> A3LWEA412I	<b>IC:</b> 649E-WEA412I

## 2.1 EUT OPERATING MODE

### □ Operating mode

Mode	Operating Mode	Operating Ant.
802.11a,n,ac	SISO	Ant 0
		Ant 1
	MIMO	Ant 0 & 1

Note :

1. This EUT is supported the AC adaptor and POE. Because worst case is AC adaptor, so we attached only the results for AC adaptor.
2. In case of radiation test, we have done all test case. Worst case is Ant 0 & 1 for service. So, we attached the results of only worst case.



### 3. TEST METHODOLOGY

The measurement procedure described in FCC KDB 789033 D01 General UNII Test Procedures v01r03 dated April 08, 2013 entitled “ Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices, the American National Standard for Testing Unlicensed Wireless Devices(ANSI C63.4-2003) – Part 15, Subpart E” were used in the measurement.

#### 3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

#### 3.2 EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.407 under the FCC Rules Part 15 Subpart E.

#### 3.3 GENERAL TEST PROCEDURES

##### Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4. (Version :2003) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

##### Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 13.1.4.1 of ANSI C63.4. (Version: 2003)

##### Conducted Antenna Terminal

See Section from 8.1 to 8.4.(KDB 789033)

#### 3.4 DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Channel low, mid and high with highest data rate (worst case) is chosen for full testing.

<b>FCC PT.15.407 TEST REPORT</b>	<b>FCC &amp; IC CERTIFICATION REPORT</b>			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
<b>Test Report No.</b> HCT-R-1406-F027	<b>Date of Issue:</b> June 18, 2014	<b>EUT Type:</b> WLAN Access Point	<b>FCC ID:</b> A3LWEA412I	<b>IC:</b> 649E-WEA412I



## 4. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipments, which is traceable to recognized national standards

## 5. FACILITIES AND ACCREDITATIONS

### 5.1 FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Korea. The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2003) and CISPR Publication 22. Detailed description of test facility was submitted to the Commission and accepted dated February 28, 2014 (Registration Number: 90661)

### 5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements. Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

<b>FCC PT.15.407 TEST REPORT</b>	<b>FCC &amp; IC CERTIFICATION REPORT</b>			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
<b>Test Report No.</b> HCT-R-1406-F027	<b>Date of Issue:</b> June 18, 2014	<b>EUT Type:</b> WLAN Access Point	<b>FCC ID:</b> A3LWEA412I	<b>IC:</b> 649E-WEA412I

## 6. ANTENNA REQUIREMENTS

### According to FCC 47 CFR §15.203:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

\* The antennas of this E.U.T are permanently attached.

\*The E.U.T Complies with the requirement of §15.203

### □ Directional Gain Calculations

▪ If any transmit signals are correlated with each other(802.11a,n,ac),

$$\text{Directional gain} = 10 \cdot \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N] \text{ dBi}$$

▪ If all transmit signals are completely uncorrelated with each other(802.11n,ac)

$$\text{Directional gain} = 10 \cdot \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10}) / N] \text{ dBi}$$

### □ Antenna Gain

CDD mode(UNII 1)

Antenna Gain	Ant 0	6.43 dBi
	Ant 1	6.34 dBi
Directional Antenna Gain	Ant 0 & 1	9.40 dBi(802.11a,n,ac)

## 7. SUMMARY OF TEST RESULTS

### 7.1 FCC Part

Test Description	FCC Part Section(s)	Test Limit	Test Condition	Test Result
26dB Bandwidth	§15.407 (for Power Measurement)	NA	CONDUCTED	PASS
Maximum Conducted Output Power,	§15.407(a)(1)	< 50 mW or $4+10 \log_{10} (BW)$ dBm (5150-5250 MHz)		PASS
Peak Power Spectral Density	§15.407(a)(1), (5)	<4 dB/ MHz (5150-5250)		PASS
Peak Excursion	§15.407(a)(6)	<13 dB/ MHz maximum difference		PASS
Frequency Stability	§15.407(g)	NA		NA
AC Conducted Emissions 150 kHz-30 MHz	§15.207	<FCC 15.207 limits		NA
Undesirable Emissions	§15.407(b)(1), (2), (3)	<-27 dBm/ MHz EIRP (5150-5350 MHz, 5470-5725 MHz)	RADIATED	PASS
General Field Strength Limits(Restricted Bands and Radiated Emission Limits)	§15.205, 15.407(b)(1), (5), (6)	Emissions in restricted bands must meet the radiated limits detailed in 15.209		PASS

## 7.2 IC Part


Test Description	IC Part Section(s)	Test Limit	Test Condition	Test Result
99% Bandwidth(IC)	RSS-GEN 4.6.1	NA	CONDUCTED	PASS
Maximum Conducted Output Power, Maximum e.i.r.p (IC)	RSS-210 [A9.2]	< 200 mW or $10+10 \log_{10}$ (BW) dBm (5150-5250 MHz) e.i.r.p. : < 1 W or $17+10 \log_{10}$ (BW) dBm (5150-5250 MHz)		PASS
Peak Power Spectral Density	RSS-210 [A9.2]	<4 dBm/ MHz (5150-5250)(FCC & IC)		PASS
AC Conducted Emissions 150 kHz-30 MHz	RSS-GEN, Section 7.2.4	RSS-GEN section 7.2.4 table 4		NA
Undesirable Emissions	RSS-210 [A8.5]	<-27 dBm/ MHz EIRP (5150-5350 MHz, 5470-5600 MHz 5650-5725 MHz)	RADIATED	PASS
General Field Strength Limits(Restricted Bands and Radiated Emission Limits)	RSS-GEN, Section 7.2.3	Emissions in restricted bands must meet the radiated limits detailed in 15.209		PASS
Receiver Spurious Emissions	RSS-GEN, Section 7.2.3	cf. Section 8.8.3		PASS

## 8. TEST RESULT

### 8.1 DUTY CYCLE

The zero-span mode on a spectrum analyzer or EMI receiver, if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal. Set the center frequency of the instrument to the center frequency of the transmission. Set  $RBW \geq EBW$  if possible; otherwise, set RBW to the largest available value. Set  $VBW \geq RBW$ . Set detector = peak or average. The zero-span measurement method shall not be used unless both RBW and VBW are  $> 50/T$ , where  $T$  is defined in section B)1)a), and the number of sweep points across duration  $T$  exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if  $T \leq 16.7$  microseconds.)

#### □ TEST CONFIGURATION

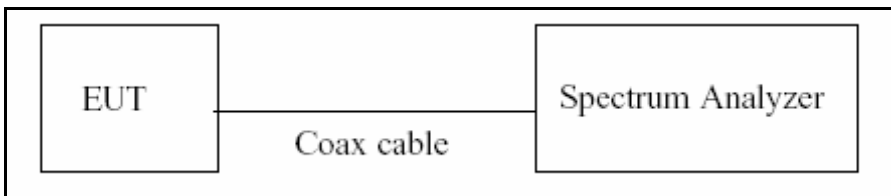

#### □ TEST PROCEDURE

The transmitter output is connected to the Spectrum Analyzer. We tested according to the zero-span measurement method, B)2) in KDB 789033( issued 04/08/2013)

The largest available value of RBW is 8 MHz and VBW is 50 MHz. The zero-span method of measuring duty cycle shall not be used if  $T \leq 6.25$  microseconds. ( $50/6.25 = 8$ )

The zero-span method was used because all measured  $T$  data are  $> 6.25$  microseconds and both RBW and VBW are  $> 50/T$ .

1. RBW = 8 MHz (the largest available value)
2. VBW = 8 MHz ( $\geq$  RBW)
3. SPAN = 0 Hz
4. Detector = Peak
5. Number of points in sweep  $> 100$
6. Trace mode = Clear write
7. Measure  $T_{total}$  and  $T_{on}$
8. Calculate Duty Cycle =  $T_{on}/T_{total}$  and Duty Cycle Factor =  $10 \cdot \log(1/\text{Duty Cycle})$

FCC PT.15.407 TEST REPORT		FCC & IC CERTIFICATION REPORT		<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCT-R-1406-F027	Date of Issue: June 18, 2014	EUT Type: WLAN Access Point	FCC ID: A3LWEA412I	IC: 649E-WEA412I

□ Duty Cycle Factor

Mode	Data Rate	T <sub>on</sub> (ms)	T <sub>total</sub> (ms)	Duty Cycle	Duty Cycle Factor
802.11a_20 MHz BW	6	2.060	2.170	0.94930876	0.226
	9	1.360	1.450	0.93793103	0.278
	12	1.025	1.095	0.93607306	0.287
	18	0.680	0.730	0.93150685	0.308
	24	0.524	0.558	0.93906810	0.273
	36	0.354	0.386	0.91709845	0.376
	48	0.272	0.302	0.90066225	0.454
	54	0.238	0.270	0.88148148	0.548
802.11n_20 MHz BW	6.5	1.920	2.015	0.95285360	0.210
	13	0.981	1.026	0.95614035	0.195
	19.5	0.664	0.698	0.95155511	0.216
	26	0.508	0.532	0.95488722	0.200
	39	0.352	0.376	0.93613624	0.287
	52	0.272	0.296	0.92047377	0.360
	58.5	0.248	0.272	0.91381215	0.391
	65	0.228	0.252	0.90461049	0.435
802.11n_40 MHz BW	13.5	0.944	1.042	0.90595010	0.429
	27	0.492	0.540	0.91111111	0.404
	40.5	0.339	0.373	0.90987124	0.410
	54	0.264	0.288	0.91826087	0.370
	81	0.188	0.212	0.88747045	0.518
	108	0.152	0.175	0.86643836	0.623
	121.5	0.140	0.163	0.85661765	0.672
	135	0.128	0.152	0.84356436	0.739


Mode	Data Rate	T <sub>on</sub> (ms)	T <sub>total</sub> (ms)	Duty Cycle	Duty Cycle Factor
5.8 GHz Band 802.11ac_20 MHz BW	6.5	1.920	2.015	0.95285360	0.210
	13	0.981	1.026	0.95614035	0.195
	19.5	0.664	0.698	0.95155511	0.216
	26	0.508	0.532	0.95488722	0.200
	39	0.352	0.376	0.93613624	0.287
	52	0.272	0.296	0.92047377	0.360
	58.5	0.248	0.272	0.91381215	0.391
	65	0.228	0.252	0.90461049	0.435
	78	0.200	0.228	0.87478109	0.581
5.8 GHz Band 802.11ac_40 MHz BW	13.5	0.944	1.042	0.90595010	0.429
	27	0.492	0.540	0.91111111	0.404
	40.5	0.339	0.373	0.90987124	0.410
	54	0.264	0.288	0.91826087	0.370
	81	0.188	0.212	0.88747045	0.518
	108	0.152	0.175	0.86643836	0.623
	121.5	0.140	0.163	0.85661765	0.672
	135	0.128	0.152	0.84356436	0.739
	162	0.116	0.144	0.80416667	0.947
	180	0.112	0.140	0.79928571	0.973
5.8 GHz Band 802.11ac_80 MHz BW	29.3	0.459	0.488	0.94057377	0.266
	58.5	0.251	0.280	0.89767442	0.469
	87.8	0.180	0.209	0.86330935	0.638
	117	0.148	0.176	0.83863636	0.764
	175.5	0.112	0.140	0.79871060	0.976
	234	0.096	0.124	0.76975060	1.136
	263.3	0.088	0.116	0.75537403	1.218
	292.5	0.084	0.113	0.74742451	1.264
	351	0.076	0.104	0.72974013	1.368
	390	0.072	0.100	0.71740000	1.442

## 8.2 26 dB BANDWIDTH MEASUREMENT

The bandwidth at 26 dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating at its maximum power control level, as defined in KDB 789033(issued 04/08/2013), at the appropriate frequencies. The spectrum analyzer's bandwidth measurement function is configured to measure the 26 dB bandwidth.

The 26 dB bandwidth is used to determine the conducted power limits.

### □ TEST CONFIGURATION

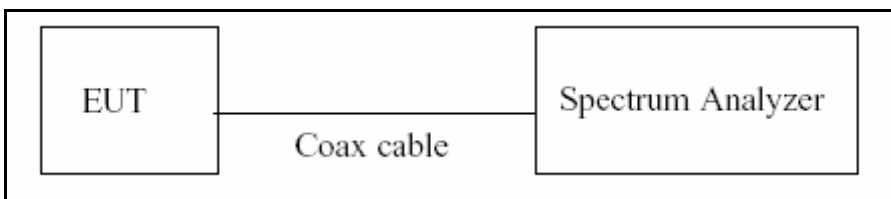

### □ TEST PROCEDURE

The transmitter output is connected to the Spectrum Analyzer.

The Spectrum Analyzer is set to( Page 3 in KDB 789033, issued 04/08/2013)

1. RBW = approximately 1 % of the emission bandwidth
2. VBW > RBW
3. Detector = Peak
4. Trace mode = max hold
5. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1 %.

<b>FCC PT.15.407 TEST REPORT</b>		<b>FCC &amp; IC CERTIFICATION REPORT</b>		<a href="http://www.hct.co.kr">www.hct.co.kr</a>
<b>Test Report No.</b> HCT-R-1406-F027	<b>Date of Issue:</b> June 18, 2014	<b>EUT Type:</b> WLAN Access Point	<b>FCC ID:</b> A3LWEA412I	<b>IC:</b> 649E-WEA412I

Ant.0

□ TEST RESULTS

20 MHz BW

Conducted 26 dB Bandwidth Measurements for 802.11a

802.11a Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5180	36	20.00	N/A	Pass
5200	40	20.06	N/A	Pass
5240	48	20.02	N/A	Pass

Conducted 26 dB Bandwidth Measurements for 802.11n

802.11n Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5180	36	20.37	N/A	Pass
5200	40	20.36	N/A	Pass
5240	48	20.47	N/A	Pass

Conducted 26 dB Bandwidth Measurements for 802.11ac

802.11ac Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5180	36	20.35	N/A	Pass
5200	40	20.38	N/A	Pass
5240	48	20.45	N/A	Pass

40 MHz BW

Conducted 26 dB Bandwidth Measurements for 802.11n

802.11n Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5190	38	39.71	N/A	Pass
5230	46	39.80	N/A	Pass

Conducted 26 dB Bandwidth Measurements for 802.11ac

802.11ac Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5190	38	39.36	N/A	Pass
5230	46	39.39	N/A	Pass

80 MHz BW

Conducted 26 dB Bandwidth Measurements for 802.11ac

802.11ac Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5210	42	82.38	N/A	Pass

Ant.1

□ TEST RESULTS

20 MHz BW

Conducted 26 dB Bandwidth Measurements for 802.11a

802.11a Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5180	36	20.03	N/A	Pass
5200	40	19.85	N/A	Pass
5240	48	20.06	N/A	Pass

Conducted 26 dB Bandwidth Measurements for 802.11n

802.11n Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5180	36	20.36	N/A	Pass
5200	40	20.31	N/A	Pass
5240	48	20.32	N/A	Pass

Conducted 26 dB Bandwidth Measurements for 802.11ac

802.11ac Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5180	36	20.27	N/A	Pass
5200	40	20.23	N/A	Pass
5240	48	20.49	N/A	Pass

40 MHz BW

Conducted 26 dB Bandwidth Measurements for 802.11n

802.11n Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5190	38	39.58	N/A	Pass
5230	46	39.76	N/A	Pass

Conducted 26 dB Bandwidth Measurements for 802.11ac

802.11ac Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5190	38	39.60	N/A	Pass
5230	46	39.62	N/A	Pass

80 MHz BW

Conducted 26 dB Bandwidth Measurements for 802.11ac

802.11ac Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5210	42	81.64	N/A	Pass

Note :


1. In order to simplify the report, attached plots were only the most wide channel.

Ant.0


□ RESULT PLOTS

20 MHz BW

26 dB Bandwidth plot (802.11a-CH 40)

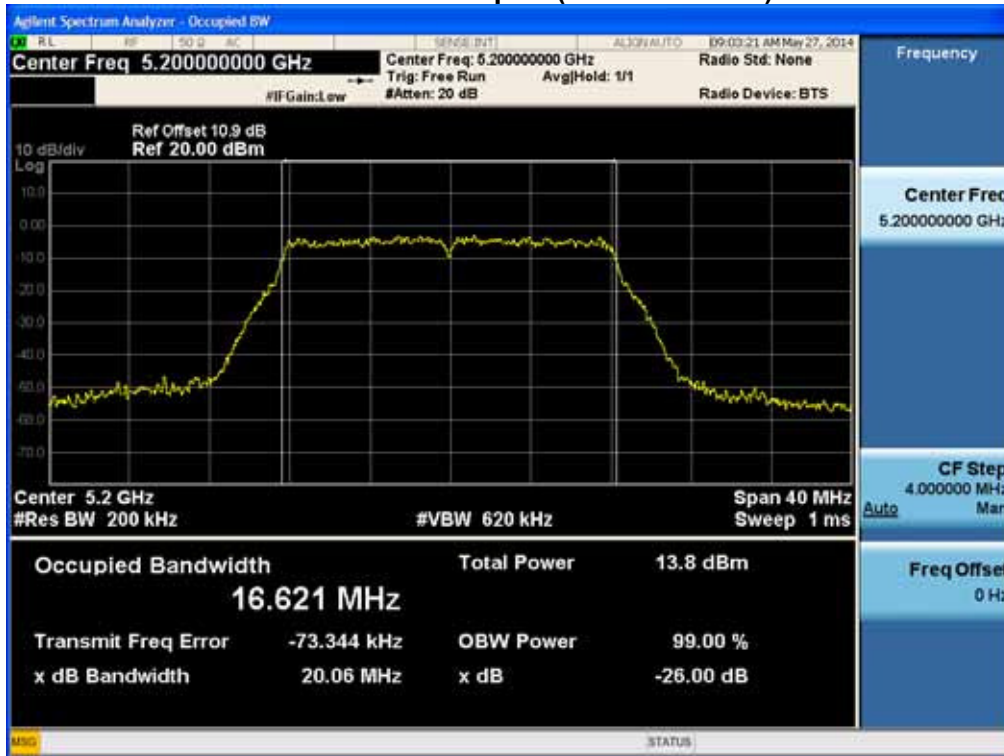


26 dB Bandwidth plot (802.11n-CH 48)

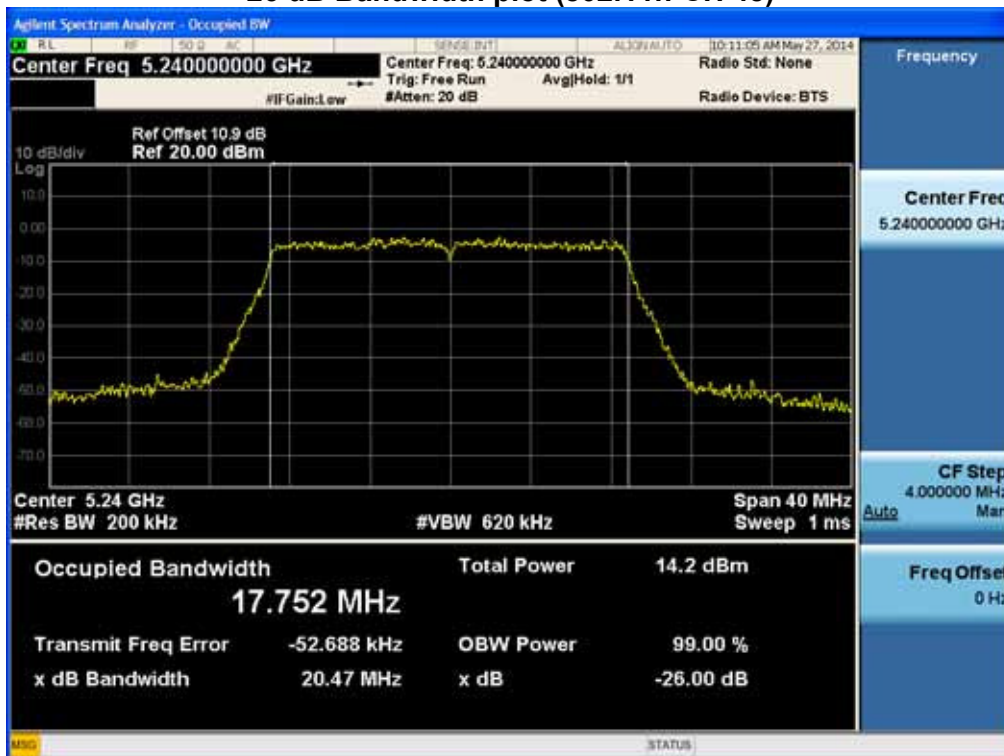


FCC PT.15.407 TEST REPORT	FCC & IC CERTIFICATION REPORT			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCT-R-1406-F027	Date of Issue: June 18, 2014	EUT Type: WLAN Access Point	FCC ID: A3LWEA4121	IC: 649E-WEA4121

### 26 dB Bandwidth plot (802.11ac-CH 48)

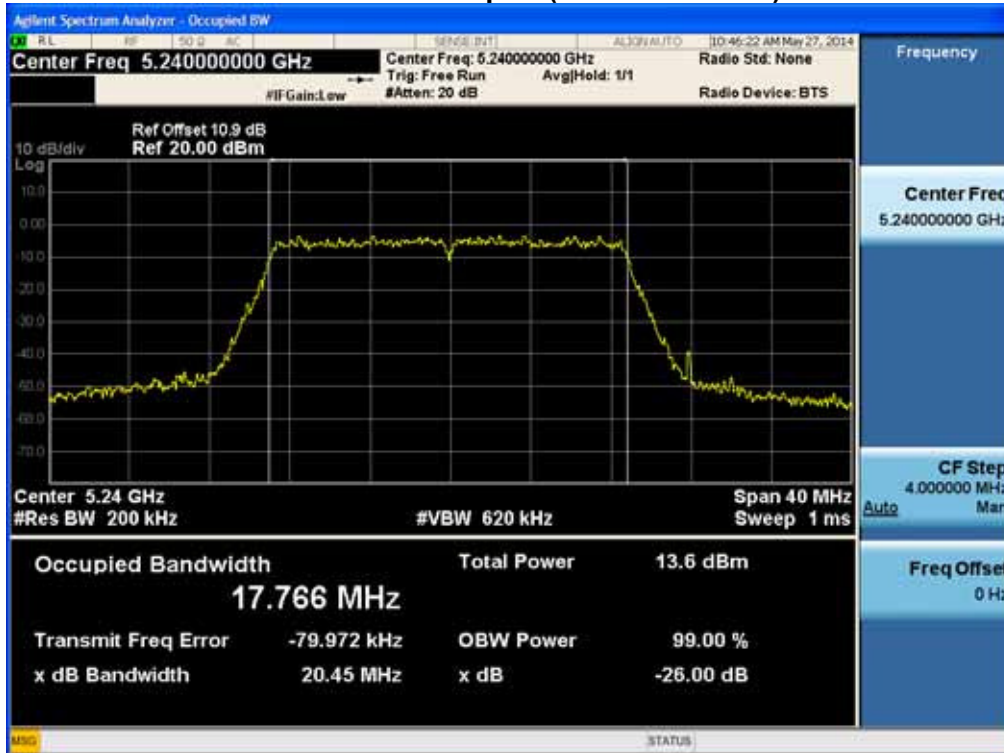


### 40 MHz BW

### 26 dB Bandwidth plot (802.11n\_CH 46)

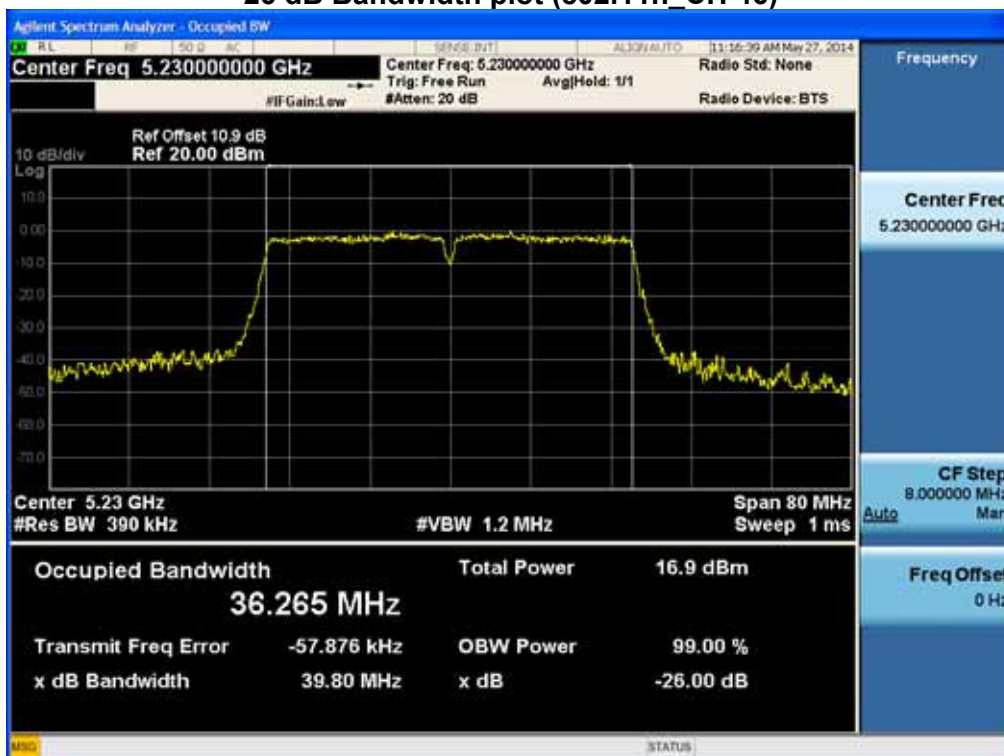


FCC PT.15.407 TEST REPORT	FCC & IC CERTIFICATION REPORT			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCT-R-1406-F027	Date of Issue: June 18, 2014	EUT Type: WLAN Access Point	FCC ID: A3LWEA412I	IC: 649E-WEA412I

### 26 dB Bandwidth plot (802.11ac\_CH 46)

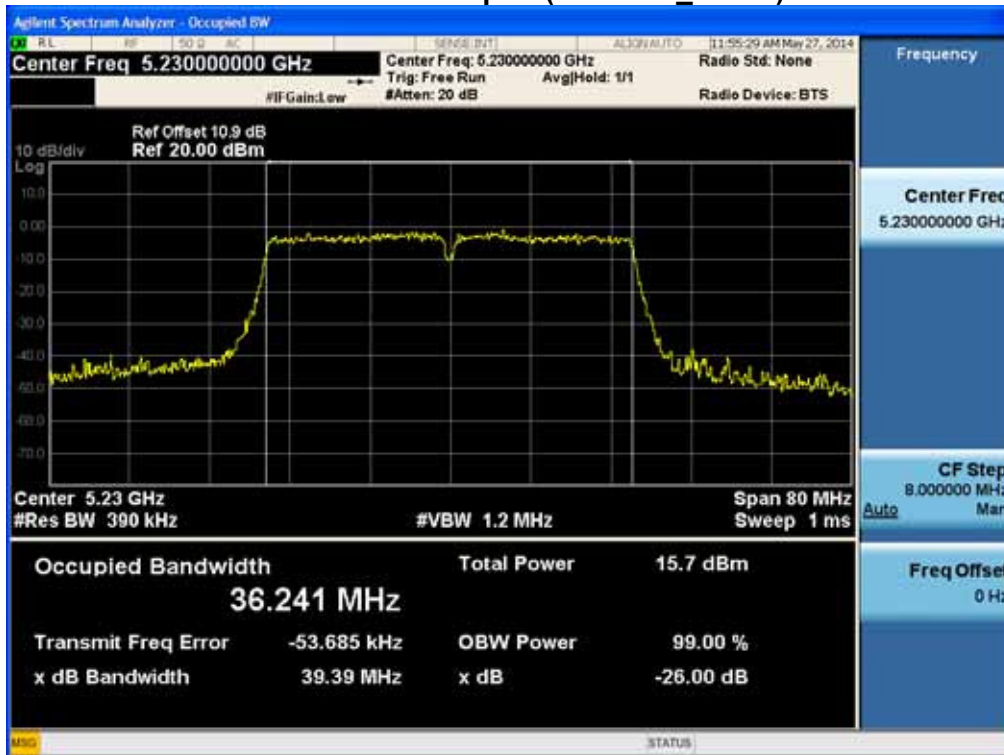

### 80 MHz BW

### 26 dB Bandwidth plot (802.11ac\_CH 42)

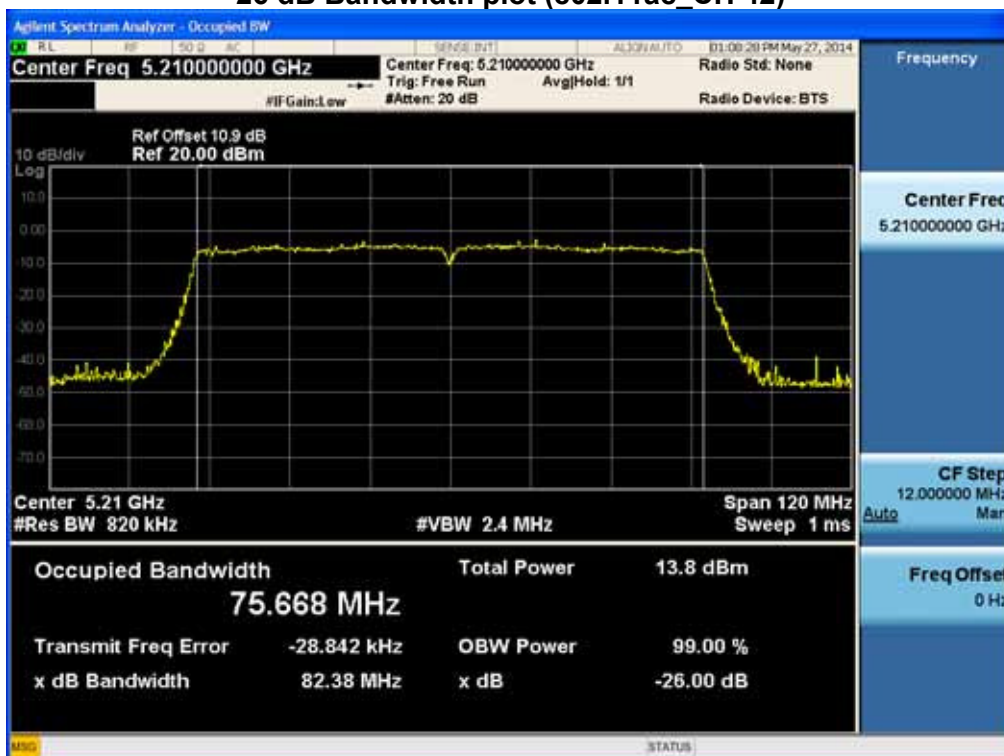


FCC PT.15.407 TEST REPORT	FCC & IC CERTIFICATION REPORT			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCT-R-1406-F027	Date of Issue: June 18, 2014	EUT Type: WLAN Access Point	FCC ID: A3LWEA412I	IC: 649E-WEA412I

Ant.1


□ RESULT PLOTS

20 MHz BW

26 dB Bandwidth plot (802.11a-CH 48)

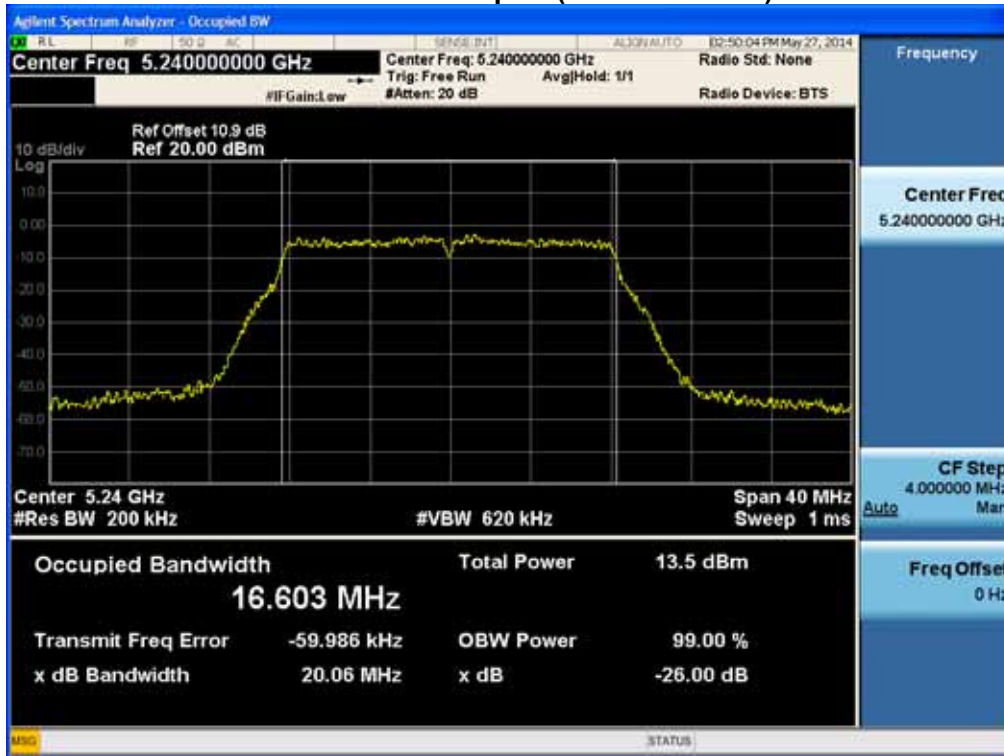


26 dB Bandwidth plot (802.11n-CH 36)

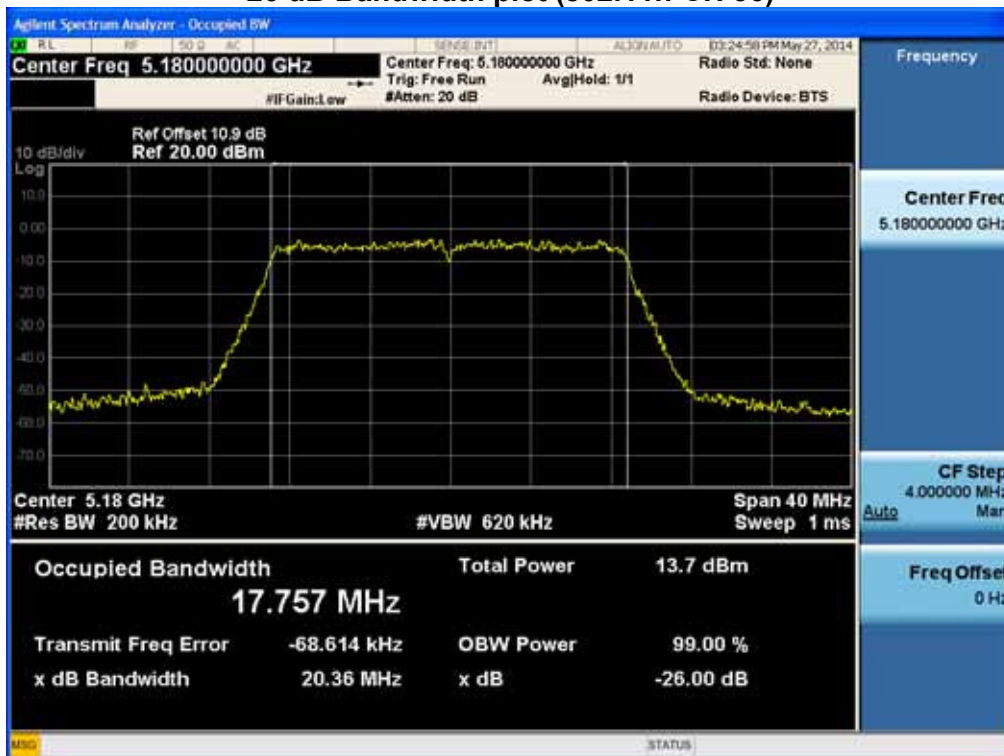


FCC PT.15.407 TEST REPORT	FCC & IC CERTIFICATION REPORT			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCT-R-1406-F027	Date of Issue: June 18, 2014	EUT Type: WLAN Access Point	FCC ID: A3LWEA4121	IC: 649E-WEA4121

### 26 dB Bandwidth plot (802.11ac-CH 48)

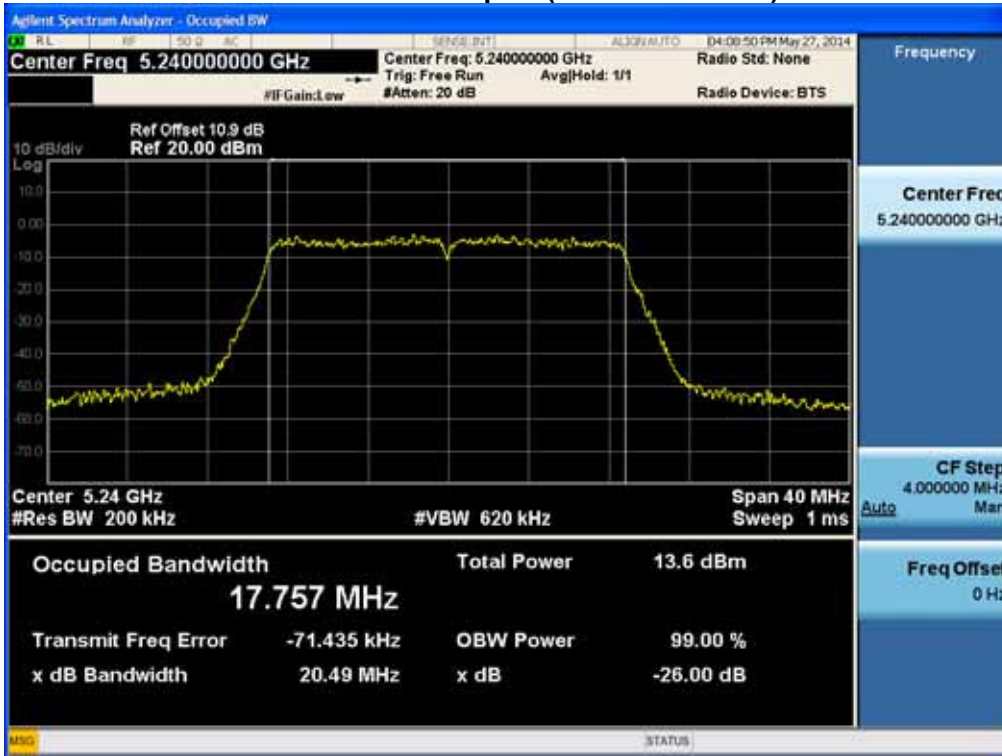


### 40 MHz BW

### 26 dB Bandwidth plot (802.11n\_CH 46)

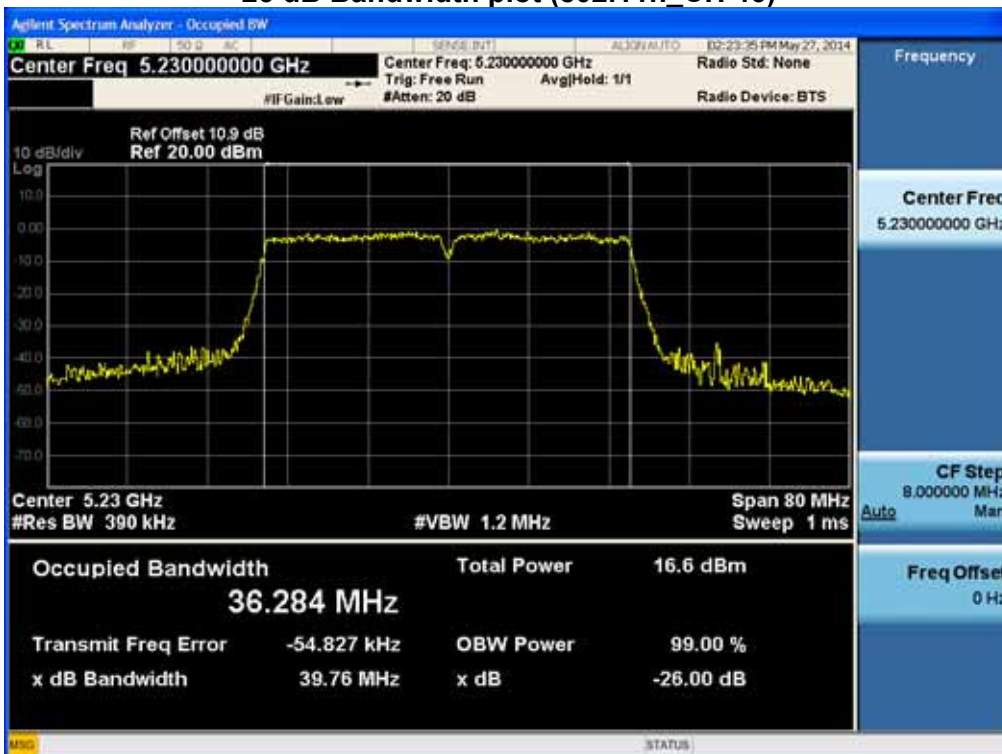


FCC PT.15.407 TEST REPORT	FCC & IC CERTIFICATION REPORT			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCT-R-1406-F027	Date of Issue: June 18, 2014	EUT Type: WLAN Access Point	FCC ID: A3LWEA412I	IC: 649E-WEA412I

### 26 dB Bandwidth plot (802.11ac\_CH 46)

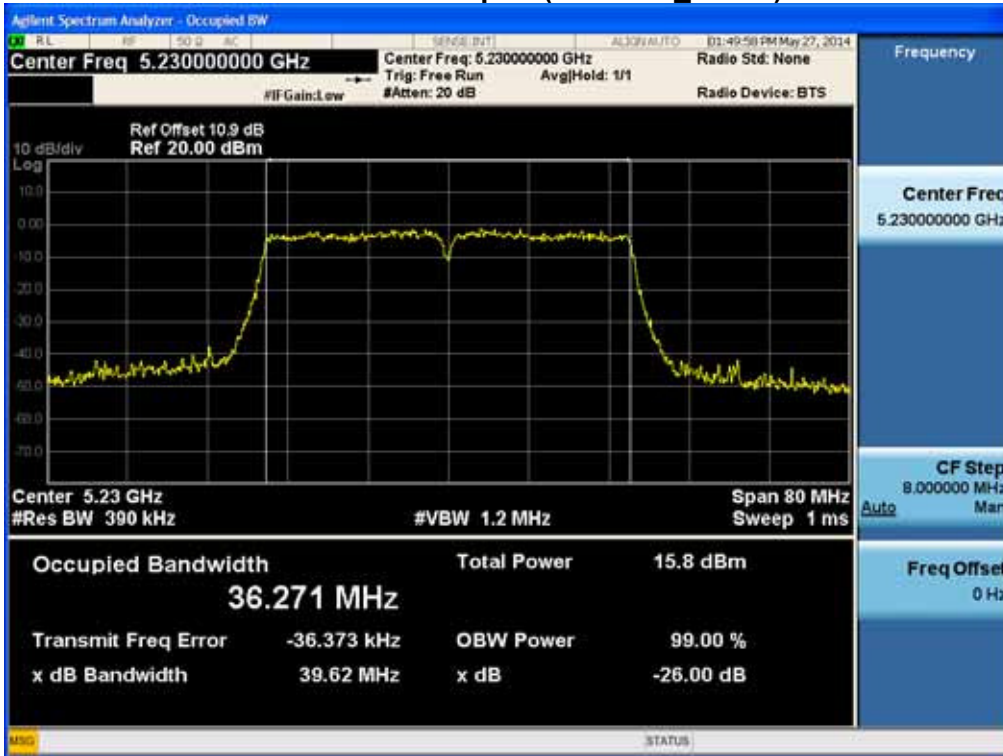

### 80 MHz BW

### 26 dB Bandwidth plot (802.11ac\_CH 42)

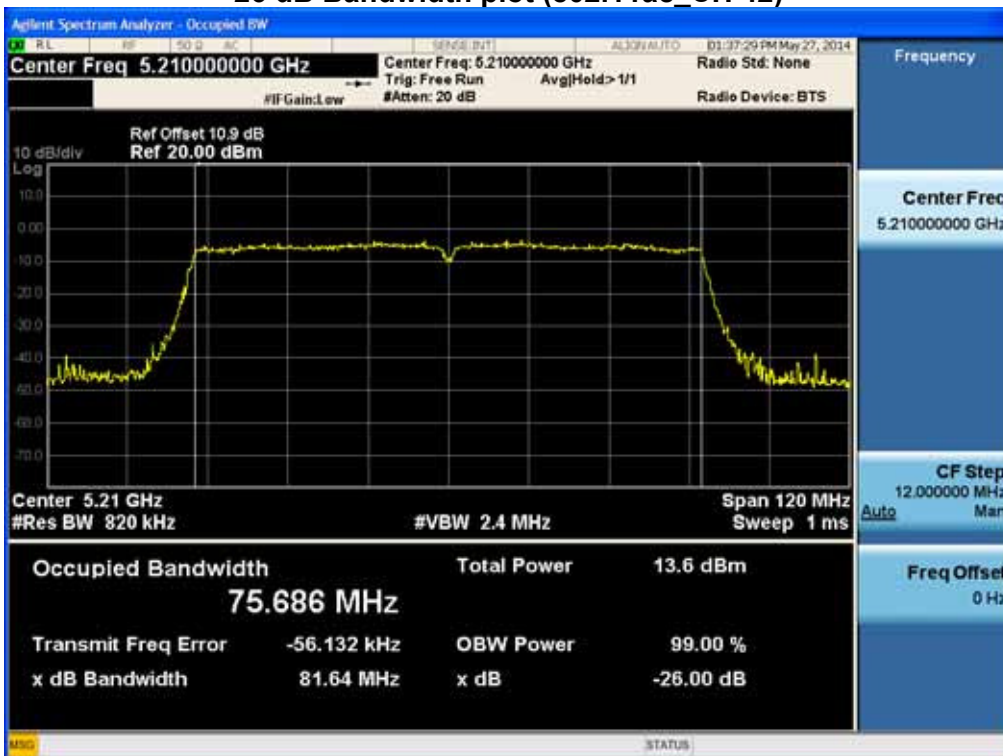

FCC PT.15.407 TEST REPORT	FCC & IC CERTIFICATION REPORT			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCT-R-1406-F027	Date of Issue: June 18, 2014	EUT Type: WLAN Access Point	FCC ID: A3LWEA412I	IC: 649E-WEA412I


### 8.3 99% BANDWIDTH MEASUREMENT

#### limit

None; for IC reporting purposes only

The 99 % bandwidth is used to determine the conducted power limits(for IC).

#### □ TEST CONFIGURATION

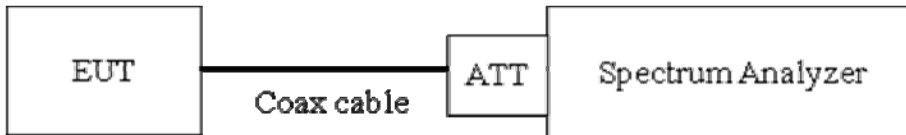

#### □ TEST PROCEDURE

The transmitter output is connected to the spectrum analyzer. The RBW is set to as close to 1% of the selected span. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth function is utilized.

RBW = 1% of the total span

VBW ≥ 3 x RBW

Detector = Peak

Trace mode = max hold

Sweep = auto couple

Allow the trace to stabilize

FCC PT.15.407 TEST REPORT		FCC & IC CERTIFICATION REPORT		<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCT-R-1406-F027	Date of Issue: June 18, 2014	EUT Type: WLAN Access Point	FCC ID: A3LWEA412I	IC: 649E-WEA412I

Ant.0

Conducted 99% Bandwidth Measurements for 802.11a

802.11a Mode		Measured Bandwidth [MHz]
Frequency [MHz]	Channel No.	
5180	36	16.530
5200	40	16.558
5240	48	16.507

Conducted 99% Bandwidth Measurements for 802.11n\_20 MHz BW

802.11n Mode		Measured Bandwidth [MHz]
Frequency [MHz]	Channel No.	
5180	36	17.727
5200	40	17.694
5240	48	17.716

Conducted 99% Bandwidth Measurements for 802.11ac\_20 MHz BW

802.11ac Mode		Measured Bandwidth [MHz]
Frequency [MHz]	Channel No.	
5180	36	17.715
5200	40	17.750
5240	48	17.717



Conducted 99% Bandwidth Measurements for 802.11n\_40 MHz BW

802.11n Mode		Measured Bandwidth [MHz]
Frequency [MHz]	Channel No.	
5190	38	36.422
5230	46	36.355

Conducted 99% Bandwidth Measurements for 802.11ac\_40 MHz BW

802.11ac Mode		Measured Bandwidth [MHz]
Frequency [MHz]	Channel No.	
5190	38	36.427
5230	46	36.387

Conducted 99% Bandwidth Measurements for 802.11ac\_80 MHz BW

802.11ac Mode		Measured Bandwidth [MHz]
Frequency [MHz]	Channel No.	
5210	42	75.934

**Ant.1**

**Conducted 99% Bandwidth Measurements for 802.11a**

802.11a Mode		Measured Bandwidth [MHz]
Frequency [MHz]	Channel No.	
5180	36	16.539
5200	40	16.524
5240	48	16.558

**Conducted 99% Bandwidth Measurements for 802.11n\_20 MHz BW**

802.11n Mode		Measured Bandwidth [MHz]
Frequency [MHz]	Channel No.	
5180	36	17.714
5200	40	17.724
5240	48	17.681

**Conducted 99% Bandwidth Measurements for 802.11ac\_20 MHz BW**

802.11ac Mode		Measured Bandwidth [MHz]
Frequency [MHz]	Channel No.	
5180	36	17.723
5200	40	17.697
5240	48	17.719

Conducted 99% Bandwidth Measurements for 802.11n\_40 MHz BW

802.11n Mode		Measured Bandwidth [MHz]
Frequency [MHz]	Channel No.	
5190	38	36.440
5230	46	36.413

Conducted 99% Bandwidth Measurements for 802.11ac\_40 MHz BW

802.11ac Mode		Measured Bandwidth [MHz]
Frequency [MHz]	Channel No.	
5190	38	36.398
5230	46	36.377

Conducted 99% Bandwidth Measurements for 802.11ac\_80 MHz BW


802.11ac Mode		Measured Bandwidth [MHz]
Frequency [MHz]	Channel No.	
5210	42	75.964

Note :


1. In order to simplify the report, attached plots were only the most wide channel.

Ant.0

99% Bandwidth plot (802.11a-CH40)

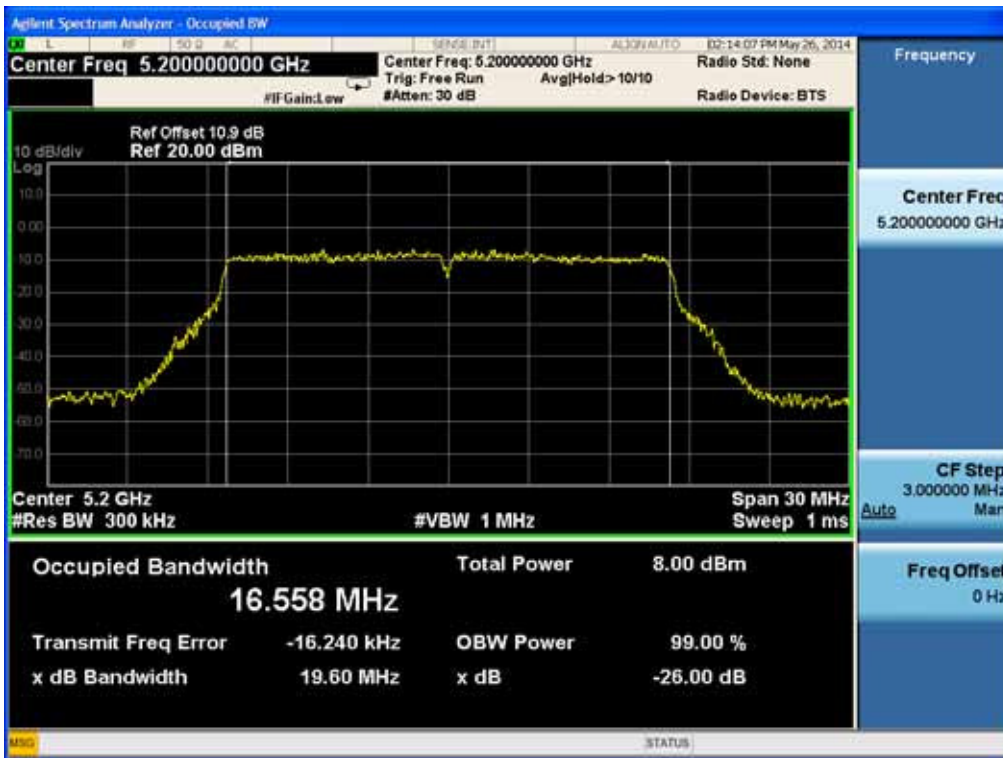


99% Bandwidth plot (802.11n-CH36)

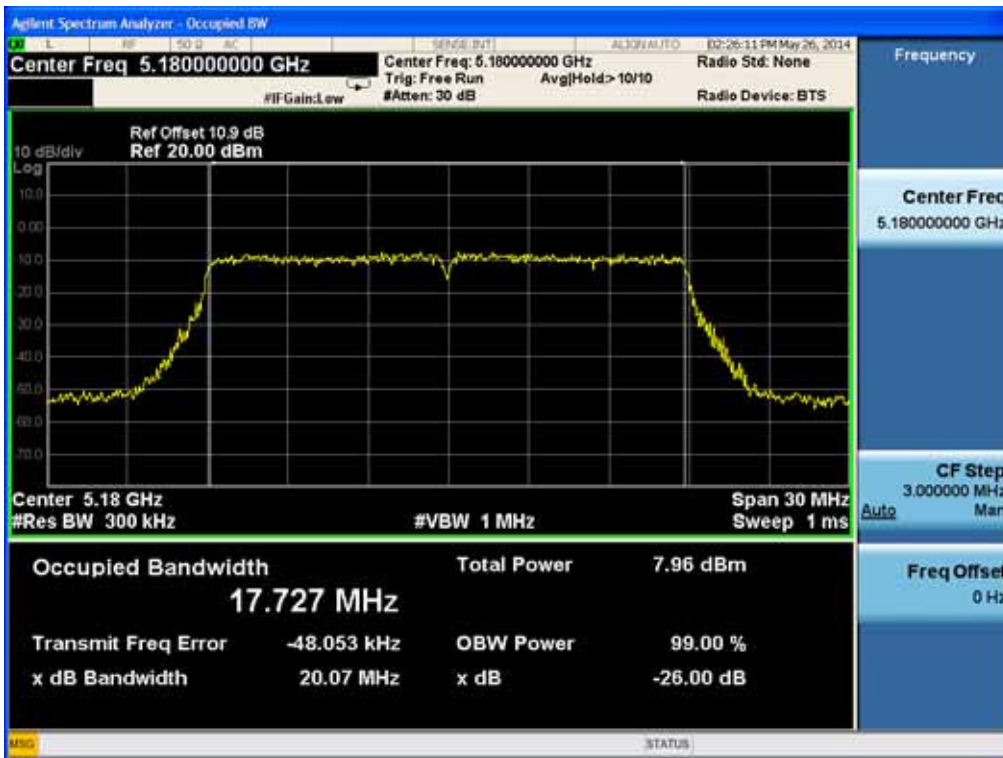


FCC PT.15.407 TEST REPORT	FCC & IC CERTIFICATION REPORT			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCT-R-1406-F027	Date of Issue: June 18, 2014	EUT Type: WLAN Access Point	FCC ID: A3LWEA412I	IC: 649E-WEA412I

### 99% Bandwidth plot (802.11ac-CH40)

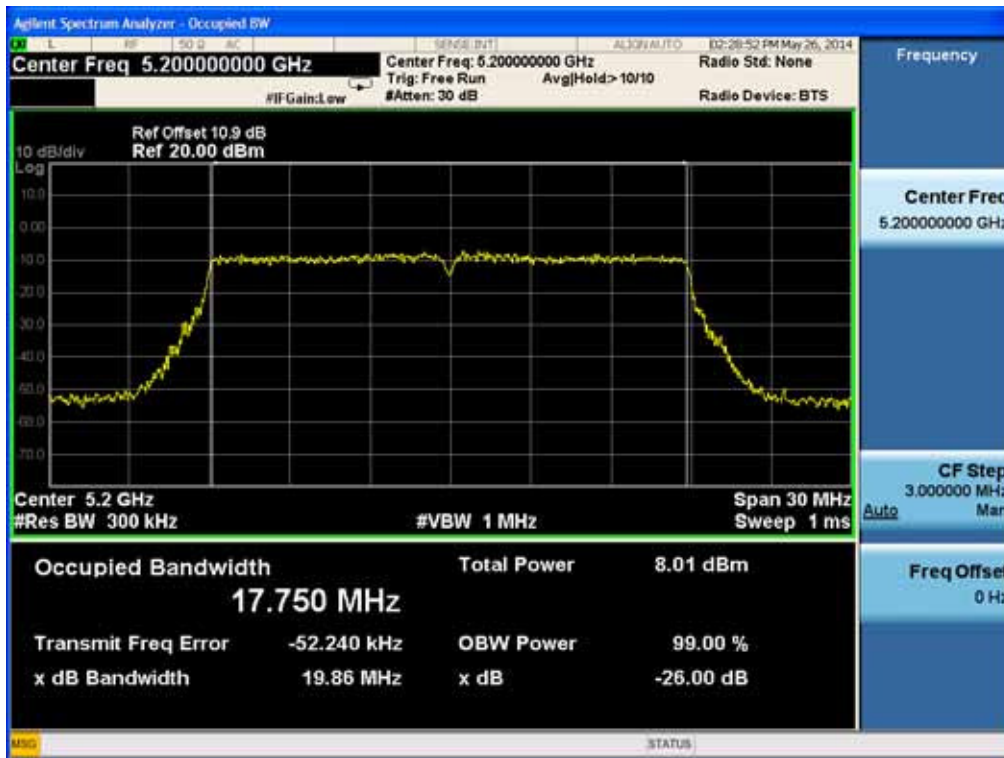


40 MHz BW

### 99% Bandwidth plot (802.11n-CH38)

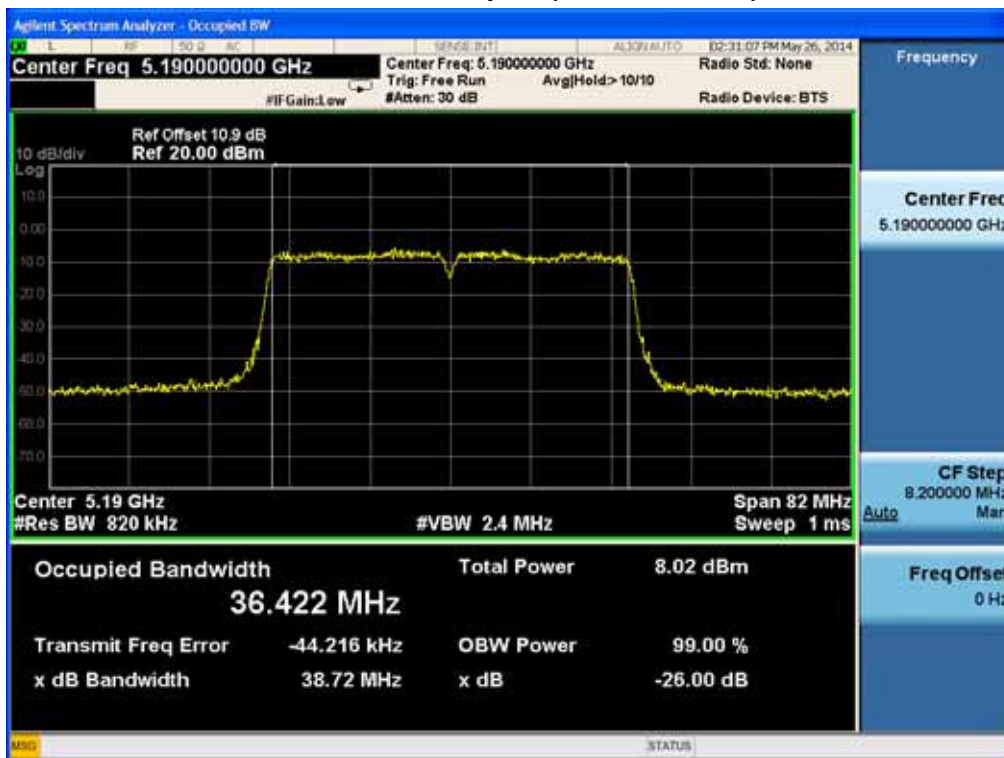


FCC PT.15.407 TEST REPORT	FCC & IC CERTIFICATION REPORT			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCT-R-1406-F027	Date of Issue: June 18, 2014	EUT Type: WLAN Access Point	FCC ID: A3LWEA412I	IC: 649E-WEA412I

### 99% Bandwidth plot (802.11ac-CH38)

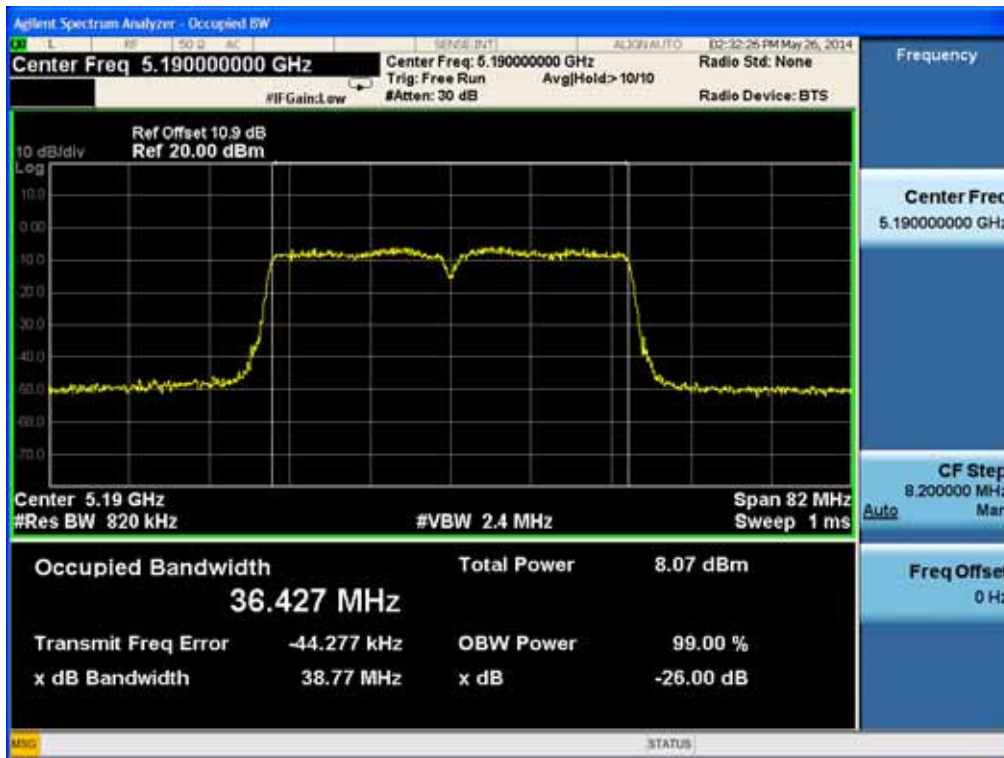

80 MHz BW


### 99% Bandwidth plot (802.11ac-CH42)

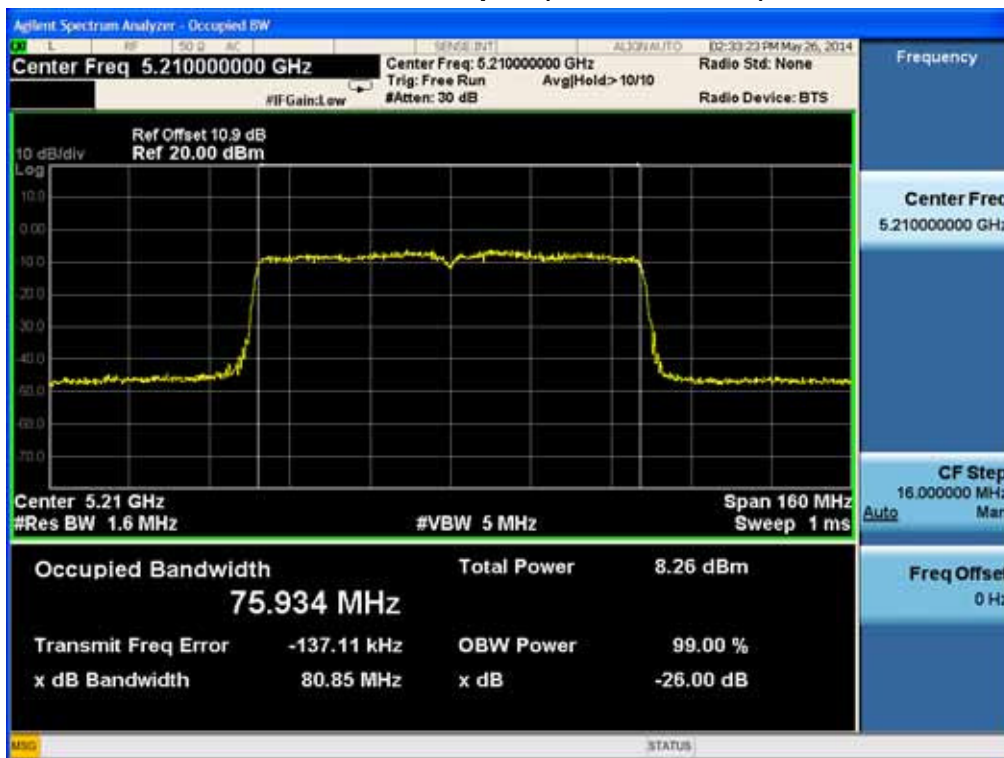


FCC PT.15.407 TEST REPORT	FCC & IC CERTIFICATION REPORT			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCT-R-1406-F027	Date of Issue: June 18, 2014	EUT Type: WLAN Access Point	FCC ID: A3LWEA412I	IC: 649E-WEA412I

Ant.1

99% Bandwidth plot (802.11a-CH48)

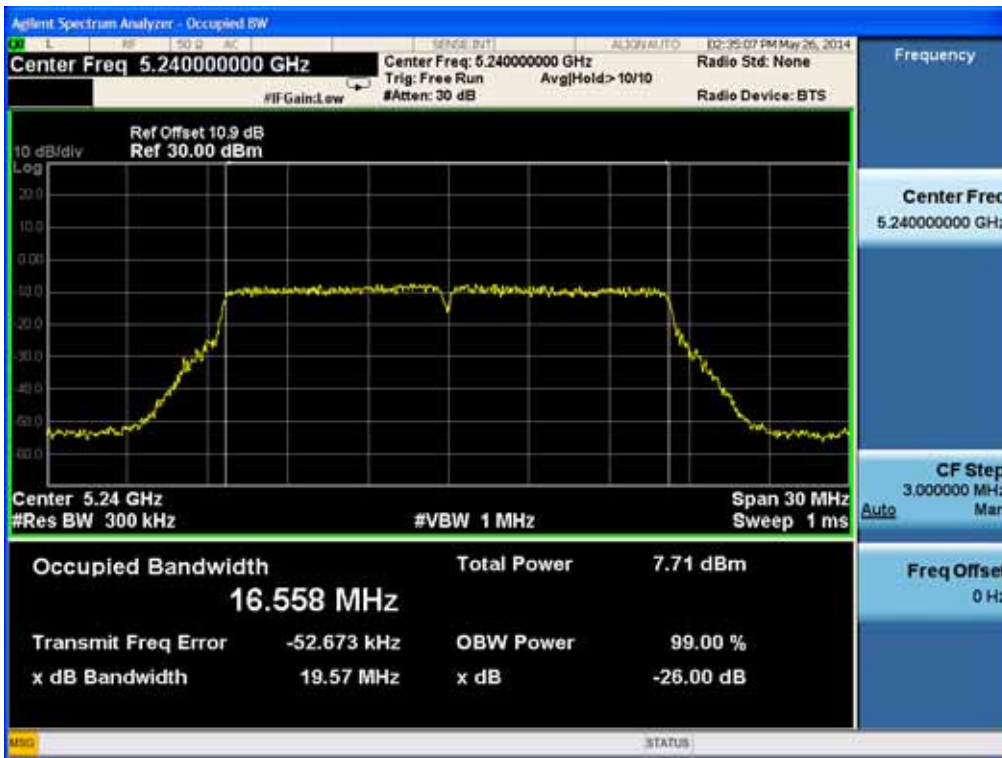


99% Bandwidth plot (802.11n-CH40)

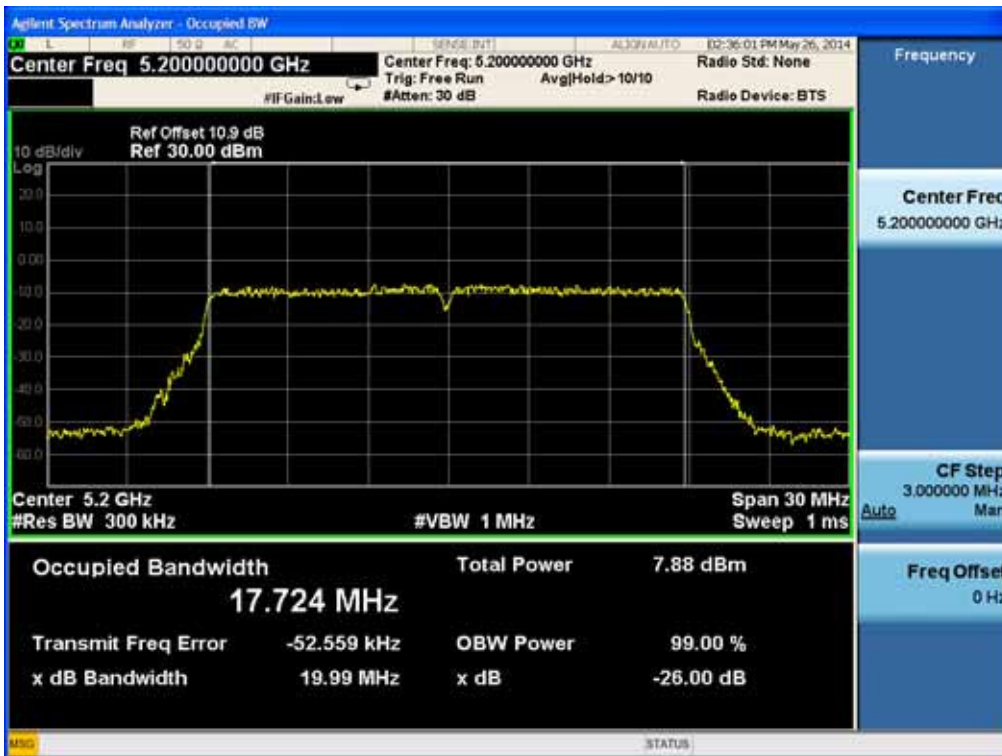


FCC PT.15.407 TEST REPORT	FCC & IC CERTIFICATION REPORT			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCT-R-1406-F027	Date of Issue: June 18, 2014	EUT Type: WLAN Access Point	FCC ID: A3LWEA412I	IC: 649E-WEA412I

### 99% Bandwidth plot (802.11ac-CH36)

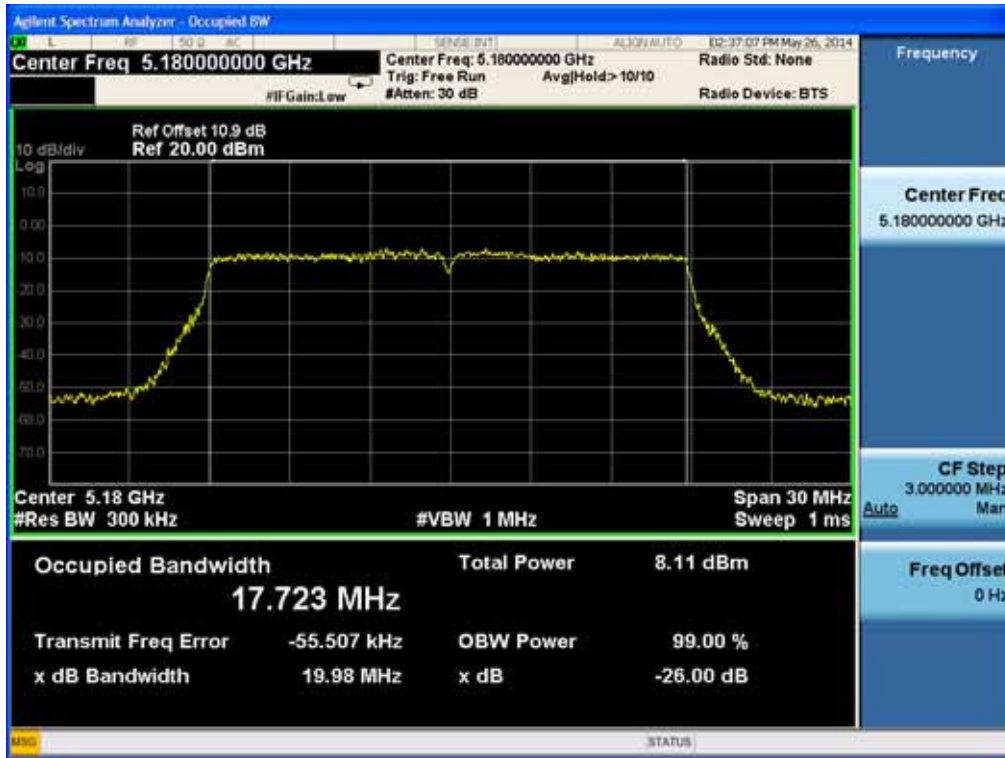


40 MHz BW

### 99% Bandwidth plot (802.11n-CH38)

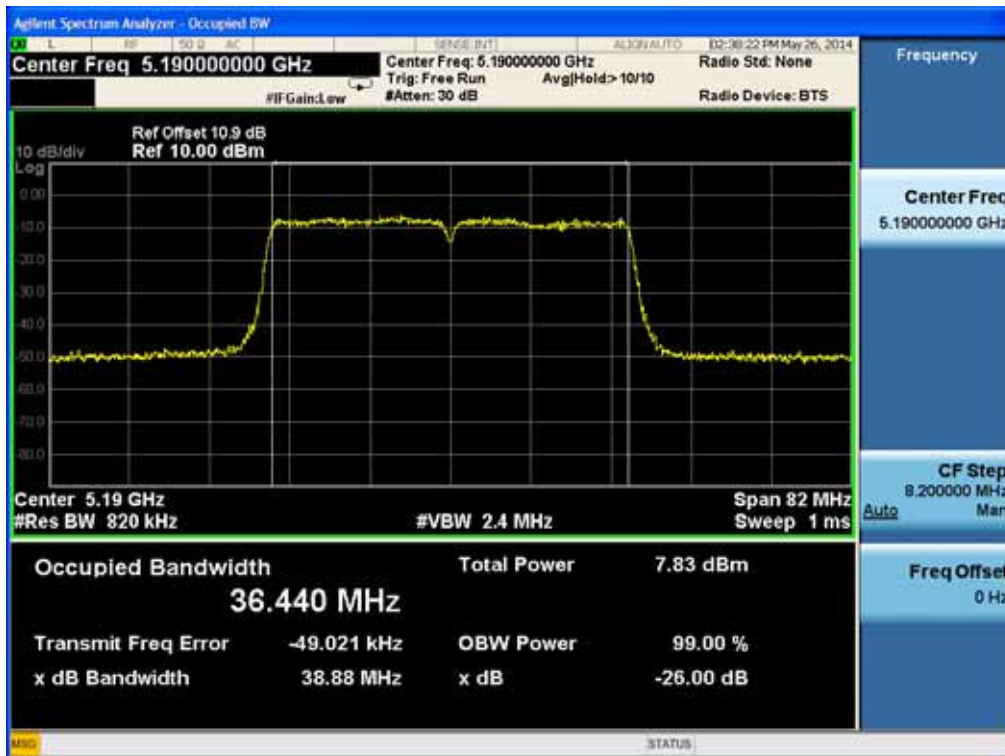

FCC PT.15.407 TEST REPORT	FCC & IC CERTIFICATION REPORT			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCT-R-1406-F027	Date of Issue: June 18, 2014	EUT Type: WLAN Access Point	FCC ID: A3LWEA4121	IC: 649E-WEA4121

### 99% Bandwidth plot (802.11ac-CH38)

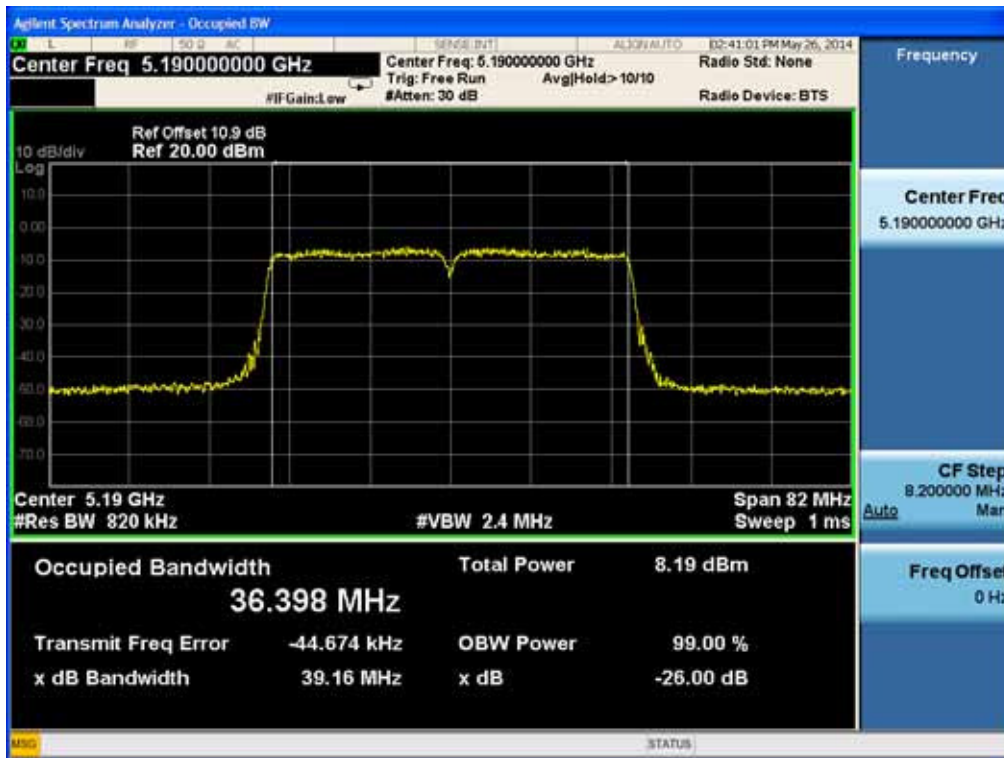

80 MHz BW

### 99% Bandwidth plot (802.11ac-CH42)



FCC PT.15.407 TEST REPORT	FCC & IC CERTIFICATION REPORT			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCT-R-1406-F027	Date of Issue: June 18, 2014	EUT Type: WLAN Access Point	FCC ID: A3LWEA412I	IC: 649E-WEA412I

## 8.4 OUTPUT POWER MEASUREMENT AND E.I.R.P.

### Test Requirements and limit, §15.407(a)(1) & RSS-210

The transmitter output is connected to the input of a RF power sensor or spectrum analyzer. Measurement is made using a broadband power meter capable of making peak and average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

#### □ Limit(CDD)

1. Maximum Conducted Output Power(for FCC & IC)


Operating Mode	Band	Mode	Ant. Port	Ant. Gain (dBi)	Limit (dBm)
SISO	UNII 1	802.11a,n,ac	0	6.43	16.56
			1	6.34	16.65
MIMO(2 TX)	UNII 1	802.11a,n,ac	0 & 1	9.40	13.59

Note : Above the limits is calculated according to antenna gain. Because antenna gain is higher than 6 dBi.

2. Maximum EIRP(for & IC) : 200 mW

Note : The limits of conducted power were applied the antenna gain. Therefore, if conducted power is pass, EIRP is also pass. So, we attached only conducted power table.

**□ TEST CONFIGURATION(20 MHz BW)**

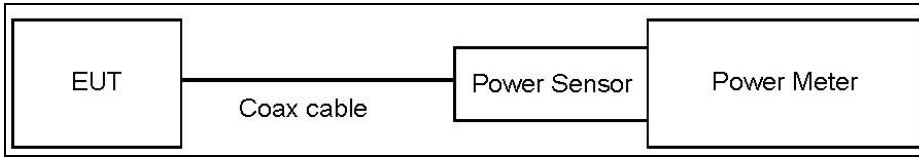

**□ TEST PROCEDURE(20 MHz BW)**

We tested according to Method E)3)a) in KDB 789033(issued 04/08/2013).

▪ Average Power

1. Measure the duty cycle.
2. Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
3. Add  $10 \log (1/x)$ , where  $x$  is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.


Note :

1. We apply to the offset in the UNII 1 band that was rounded off to the closest tenth dB. Actual value of loss for the attenuator and cable combination is below table. We used the particular cable type that is supported by manufacture.

Band	Loss(dB)
UNII 1	10.9

(Actual value of loss for the attenuator and cable combination)

**□ TEST CONFIGURATION(40 MHz BW & 80 MHz BW)**

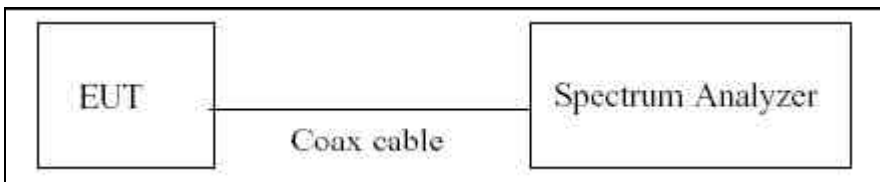

**□ TEST PROCEDURE(40 MHz BW & 80 MHz BW)**

The transmitter output is connected to the Spectrum Analyzer. We use the spectrum analyzer's integrated band power measurement function. We tested according to Method SA-2 in KDB 789033(issued 04/08/2013).

The Spectrum Analyzer is set to

▪ Average Power

1. Measure the duty cycle.
2. Set span to encompass the 26 dB EBW of the signal.
3. RBW = 1 MHz.
4. VBW  $\geq$  3 MHz.
5. Number of points in sweep  $\geq$  2\*span/RBW.

FCC PT.15.407 TEST REPORT		FCC & IC CERTIFICATION REPORT		<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCT-R-1406-F027	Date of Issue: June 18, 2014	EUT Type: WLAN Access Point	FCC ID: A3LWEA412I	IC: 649E-WEA412I

6. Sweep time = auto.
7. Detector = RMS.
8. Do not use sweep triggering. Allow the sweep to “free run”.
9. Trace average at least 100 traces in power averaging(RMS) mode
10. Integrated bandwidth = OBW
11. Add  $10\log(1/x)$ , where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

Note :

1. We apply to the offset in the UNII 1 band that was rounded off to the closest tenth dB. Actual value of loss for the attenuator and cable combination is below table. We used the particular cable type that is supported by manufacture.

Band	Loss(dB)
UNII 1	10.9

(Actual value of loss for the attenuator and cable combination)

**□ Sample Calculation (Conducted)**

Output Power = Reading Value + ATT loss + Cable loss(1 ea) + Duty Cycle Factor

**□ Sample Calculation (EIRP)**

Output Power = Reading Value + ATT loss + Cable loss(1 ea) + Duty Cycle Factor + Ant. Gain

<b>FCC PT.15.407 TEST REPORT</b>		<b>FCC &amp; IC CERTIFICATION REPORT</b>		<a href="http://www.hct.co.kr">www.hct.co.kr</a>
<b>Test Report No.</b> HCT-R-1406-F027	<b>Date of Issue:</b> June 18, 2014	<b>EUT Type:</b> WLAN Access Point	<b>FCC ID:</b> A3LWEA412I	<b>IC:</b> 649E-WEA412I

□ TEST RESULTS\_Ant.0

Conducted Output Power Measurements (802.11a Mode: 5180~5240)

802.11a Mode		Rate (Mbps)	Measured Power(dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.					
5180	36	6	7.04	0.226	7.27	16.56
		9	6.93	0.278	7.21	16.56
		12	7.00	0.287	7.28	16.56
		18	7.21	0.308	7.52	16.56
		24	7.02	0.273	7.29	16.56
		36	6.84	0.376	7.21	16.56
		48	6.97	0.454	7.42	16.56
		54	6.78	0.548	7.33	16.56
5200	40	6	6.91	0.226	7.14	16.56
		9	6.93	0.278	7.20	16.56
		12	6.82	0.287	7.10	16.56
		18	6.88	0.308	7.19	16.56
		24	6.84	0.273	7.11	16.56
		36	6.84	0.376	7.22	16.56
		48	6.82	0.454	7.27	16.56
		54	6.74	0.548	7.29	16.56
5240	48	6	6.76	0.226	6.99	16.56
		9	7.03	0.278	7.31	16.56
		12	6.91	0.287	7.20	16.56
		18	6.83	0.308	7.14	16.56
		24	6.94	0.273	7.21	16.56
		36	6.75	0.376	7.12	16.56
		48	6.94	0.454	7.39	16.56
		54	6.64	0.548	7.19	16.56

□ TEST RESULTS\_Ant.1

Conducted Output Power Measurements (802.11a Mode: 5180~5240)

802.11a Mode		Rate (Mbps)	Measured Power(dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.					
5180	36	6	6.99	0.226	7.22	16.65
		9	7.02	0.278	7.30	16.65
		12	6.96	0.287	7.25	16.65
		18	6.96	0.308	7.27	16.65
		24	6.67	0.273	6.94	16.65
		36	6.91	0.376	7.29	16.65
		48	6.83	0.454	7.29	16.65
		54	6.65	0.548	7.20	16.65
5200	40	6	6.79	0.226	7.01	16.65
		9	6.80	0.278	7.08	16.65
		12	6.55	0.287	6.84	16.65
		18	6.83	0.308	7.14	16.65
		24	6.65	0.273	6.92	16.65
		36	6.52	0.376	6.89	16.65
		48	6.78	0.454	7.24	16.65
		54	6.41	0.548	6.96	16.65
5240	48	6	6.76	0.226	6.99	16.65
		9	6.82	0.278	7.10	16.65
		12	6.77	0.287	7.06	16.65
		18	6.81	0.308	7.11	16.65
		24	6.74	0.273	7.01	16.65
		36	6.57	0.376	6.95	16.65
		48	6.78	0.454	7.24	16.65
		54	6.52	0.548	7.06	16.65

□ TEST RESULTS\_Sum Data of Ant.0 and Ant.1

Conducted Output Power Measurements (802.11a Mode: 5180~5240)

802.11a Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
5180	36	6	10.26	13.59
		9	10.27	13.59
		12	10.28	13.59
		18	10.41	13.59
		24	10.13	13.59
		36	10.26	13.59
		48	10.37	13.59
		54	10.28	13.59
5200	40	6	10.09	13.59
		9	10.15	13.59
		12	9.98	13.59
		18	10.18	13.59
		24	10.03	13.59
		36	10.07	13.59
		48	10.27	13.59
		54	10.14	13.59
5240	48	6	10.00	13.59
		9	10.22	13.59
		12	10.14	13.59
		18	10.14	13.59
		24	10.12	13.59
		36	10.05	13.59
		48	10.33	13.59
		54	10.14	13.59

□ TEST RESULTS\_Ant.0

Conducted Output Power Measurements (802.11n\_20 MHz BW Mode: 5180~5240)

802.11n Mode		Rate (Mbps)	Measured Power(dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.					
5180	36	6.5	7.04	0.210	7.25	16.56
		13	7.06	0.195	7.26	16.56
		19.5	7.18	0.216	7.39	16.56
		26	6.97	0.200	7.17	16.56
		39	6.97	0.287	7.26	16.56
		52	7.07	0.360	7.43	16.56
		58.5	6.86	0.391	7.25	16.56
		65	6.92	0.435	7.36	16.56
5200	40	6.5	6.89	0.210	7.10	16.56
		13	6.88	0.195	7.08	16.56
		19.5	6.91	0.216	7.13	16.56
		26	6.96	0.200	7.16	16.56
		39	6.89	0.287	7.18	16.56
		52	6.89	0.360	7.25	16.56
		58.5	6.86	0.391	7.25	16.56
		65	6.76	0.435	7.19	16.56
5240	48	6.5	7.37	0.210	7.58	16.56
		13	7.23	0.195	7.42	16.56
		19.5	7.15	0.216	7.37	16.56
		26	7.30	0.200	7.50	16.56
		39	7.24	0.287	7.52	16.56
		52	7.14	0.360	7.50	16.56
		58.5	7.09	0.391	7.48	16.56
		65	7.12	0.435	7.55	16.56

□ TEST RESULTS\_Ant.1

Conducted Output Power Measurements (802.11n\_20 MHz BW Mode: 5180~5240)

802.11n Mode		Rate (Mbps)	Measured Power(dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.					
5180	36	6.5	6.95	0.210	7.16	16.65
		13	6.88	0.195	7.08	16.65
		19.5	6.86	0.216	7.08	16.65
		26	6.95	0.200	7.15	16.65
		39	6.87	0.287	7.15	16.65
		52	6.83	0.360	7.19	16.65
		58.5	6.84	0.391	7.23	16.65
		65	6.68	0.435	7.12	16.65
5200	40	6.5	6.82	0.210	7.03	16.65
		13	6.80	0.195	7.00	16.65
		19.5	6.79	0.216	7.01	16.65
		26	6.83	0.200	7.03	16.65
		39	6.61	0.287	6.89	16.65
		52	6.69	0.360	7.05	16.65
		58.5	6.61	0.391	7.00	16.65
		65	6.60	0.435	7.03	16.65
5240	48	6.5	7.28	0.210	7.49	16.65
		13	7.24	0.195	7.43	16.65
		19.5	7.12	0.216	7.33	16.65
		26	7.40	0.200	7.60	16.65
		39	7.04	0.287	7.33	16.65
		52	7.29	0.360	7.65	16.65
		58.5	7.20	0.391	7.59	16.65
		65	7.23	0.435	7.67	16.65

□ TEST RESULTS\_Sum Data of Ant.0 and Ant.1

Conducted Output Power Measurements (802.11n\_20 MHz BW Mode: 5180~5240)

802.11n Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
5180	36	6.5	10.22	13.59
		13	10.18	13.59
		19.5	10.25	13.59
		26	10.17	13.59
		39	10.22	13.59
		52	10.32	13.59
		58.5	10.25	13.59
		65	10.25	13.59
5200	40	6.5	10.08	13.59
		13	10.05	13.59
		19.5	10.08	13.59
		26	10.11	13.59
		39	10.05	13.59
		52	10.16	13.59
		58.5	10.14	13.59
		65	10.12	13.59
5240	48	6.5	10.55	13.59
		13	10.44	13.59
		19.5	10.36	13.59
		26	10.56	13.59
		39	10.44	13.59
		52	10.59	13.59
		58.5	10.55	13.59
		65	10.62	13.59

□ TEST RESULTS\_Ant.0

Conducted Output Power Measurements (802.11n\_40 MHz BW Mode: 5190~5230)

802.11n Mode		Rate (Mbps)	Measured Power(dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.					
5190	38	13.5	8.06	0.429	8.49	16.56
		27	7.83	0.404	8.23	16.56
		40.5	8.00	0.410	8.41	16.56
		54	8.02	0.370	8.39	16.56
		81	7.88	0.518	8.40	16.56
		108	7.77	0.623	8.39	16.56
		121.5	7.73	0.672	8.41	16.56
		135	7.70	0.739	8.44	16.56
5230	46	13.5	9.84	0.429	10.27	16.56
		27	9.96	0.404	10.37	16.56
		40.5	9.72	0.410	10.13	16.56
		54	9.78	0.370	10.15	16.56
		81	9.83	0.518	10.34	16.56
		108	9.65	0.623	10.27	16.56
		121.5	9.29	0.672	9.96	16.56
		135	9.74	0.739	10.48	16.56

□ TEST RESULTS\_Ant.1

Conducted Output Power Measurements (802.11n\_40 MHz BW Mode: 5190~5230)

802.11n Mode		Rate (Mbps)	Measured Power(dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.					
5190	38	13.5	7.90	0.429	8.33	16.65
		27	7.75	0.404	8.15	16.65
		40.5	7.97	0.410	8.38	16.65
		54	7.85	0.370	8.23	16.65
		81	7.73	0.518	8.25	16.65
		108	7.65	0.623	8.27	16.65
		121.5	7.62	0.672	8.29	16.65
		135	7.71	0.739	8.45	16.65
5230	46	13.5	9.60	0.429	10.03	16.65
		27	9.63	0.404	10.04	16.65
		40.5	9.70	0.410	10.11	16.65
		54	9.72	0.370	10.09	16.65
		81	9.60	0.518	10.12	16.65
		108	9.48	0.623	10.10	16.65
		121.5	9.42	0.672	10.10	16.65
		135	9.41	0.739	10.15	16.65

FCC PT.15.407 TEST REPORT	FCC & IC CERTIFICATION REPORT			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCT-R-1406-F027	Date of Issue: June 18, 2014	EUT Type: WLAN Access Point	FCC ID: A3LWEA412I	IC: 649E-WEA412I

□ TEST RESULTS\_Sum Data of Ant.0 and Ant.1

Conducted Output Power Measurements (802.11n\_40 MHz BW Mode: 5190~5230)

802.11n Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
5190	38	13.5	11.42	13.59
		27	11.20	13.59
		40.5	11.41	13.59
		54	11.32	13.59
		81	11.34	13.59
		108	11.34	13.59
		121.5	11.36	13.59
		135	11.46	13.59
5230	46	13.5	13.16	13.59
		27	13.22	13.59
		40.5	13.13	13.59
		54	13.13	13.59
		81	13.24	13.59
		108	13.20	13.59
		121.5	13.04	13.59
		135	13.33	13.59



□ TEST RESULTS\_Ant.0

Conducted Output Power Measurements (802.11ac\_20 MHz BW Mode: 5180~5240)

802.11ac Mode		Rate (Mbps)	Measured Power(dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.					
5180	36	6.5	7.66	0.210	7.87	16.56
		13	7.52	0.195	7.71	16.56
		19.5	7.63	0.216	7.85	16.56
		26	7.59	0.200	7.79	16.56
		39	7.52	0.287	7.81	16.56
		52	7.24	0.360	7.60	16.56
		58.5	7.40	0.391	7.79	16.56
		65	7.11	0.435	7.54	16.56
		78	7.03	0.581	7.61	16.56
5200	40	6.5	7.40	0.210	7.61	16.56
		13	7.32	0.195	7.52	16.56
		19.5	7.36	0.216	7.58	16.56
		26	7.32	0.200	7.52	16.56
		39	7.20	0.287	7.48	16.56
		52	7.01	0.360	7.37	16.56
		58.5	7.10	0.391	7.49	16.56
		65	6.88	0.435	7.32	16.56
		78	6.89	0.581	7.47	16.56
5240	48	6.5	6.91	0.210	7.12	16.56
		13	6.86	0.195	7.05	16.56
		19.5	6.86	0.216	7.08	16.56
		26	6.82	0.200	7.02	16.56
		39	6.73	0.287	7.02	16.56
		52	6.68	0.360	7.04	16.56
		58.5	6.63	0.391	7.02	16.56
		65	6.55	0.435	6.99	16.56
		78	6.49	0.581	7.07	16.56

FCC PT.15.407 TEST REPORT	FCC & IC CERTIFICATION REPORT			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCT-R-1406-F027	Date of Issue: June 18, 2014	EUT Type: WLAN Access Point	FCC ID: A3LWEA412I	IC: 649E-WEA412I



□ TEST RESULTS\_Ant.1

Conducted Output Power Measurements (802.11ac\_20 MHz BW Mode: 5180~5240)

802.11ac Mode		Rate (Mbps)	Measured Power(dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.					
5180	36	6.5	7.58	0.210	7.79	16.65
		13	7.46	0.195	7.65	16.65
		19.5	7.41	0.216	7.62	16.65
		26	7.48	0.200	7.68	16.65
		39	7.21	0.287	7.49	16.65
		52	7.26	0.360	7.62	16.65
		58.5	7.27	0.391	7.66	16.65
		65	7.27	0.435	7.71	16.65
		78	7.16	0.581	7.74	16.65
5200	40	6.5	7.49	0.210	7.70	16.65
		13	7.48	0.195	7.67	16.65
		19.5	7.16	0.216	7.38	16.65
		26	7.29	0.200	7.49	16.65
		39	7.28	0.287	7.56	16.65
		52	7.22	0.360	7.58	16.65
		58.5	7.17	0.391	7.56	16.65
		65	7.12	0.435	7.56	16.65
		78	6.79	0.581	7.37	16.65
5240	48	6.5	6.93	0.210	7.14	16.65
		13	6.88	0.195	7.07	16.65
		19.5	6.82	0.216	7.03	16.65
		26	6.79	0.200	6.99	16.65
		39	6.69	0.287	6.98	16.65
		52	6.60	0.360	6.96	16.65
		58.5	6.56	0.391	6.96	16.65
		65	6.54	0.435	6.98	16.65
		78	6.36	0.581	6.94	16.65

FCC PT.15.407 TEST REPORT	FCC & IC CERTIFICATION REPORT			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCT-R-1406-F027	Date of Issue: June 18, 2014	EUT Type: WLAN Access Point	FCC ID: A3LWEA412I	IC: 649E-WEA412I

□ TEST RESULTS\_Sum Data of Ant.0 and Ant.1

Conducted Output Power Measurements (802.11ac\_20 MHz BW Mode: 5180~5240)

802.11ac Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
5180	36	6.5	10.84	13.59
		13	10.69	13.59
		19.5	10.75	13.59
		26	10.75	13.59
		39	10.66	13.59
		52	10.62	13.59
		58.5	10.74	13.59
		65	10.64	13.59
		78	10.69	13.59
5200	40	6.5	10.67	13.59
		13	10.61	13.59
		19.5	10.49	13.59
		26	10.52	13.59
		39	10.53	13.59
		52	10.49	13.59
		58.5	10.54	13.59
		65	10.45	13.59
		78	10.43	13.59
5240	48	6.5	10.14	13.59
		13	10.07	13.59
		19.5	10.07	13.59
		26	10.02	13.59
		39	10.01	13.59
		52	10.01	13.59
		58.5	10.00	13.59
		65	10.00	13.59
		78	10.02	13.59

□ TEST RESULTS\_Ant.0

Conducted Output Power Measurements (802.11ac\_40 MHz BW Mode: 5190~5230)

802.11ac Mode		Rate (Mbps)	Measured Power(dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.					
5190	38	13.5	8.05	0.429	8.48	16.56
		27	8.03	0.404	8.44	16.56
		40.5	7.95	0.410	8.36	16.56
		54	7.87	0.370	8.24	16.56
		81	7.74	0.518	8.26	16.56
		108	7.61	0.623	8.23	16.56
		121.5	7.57	0.672	8.25	16.56
		135	7.51	0.739	8.25	16.56
		162	7.41	0.947	8.35	16.56
		180	7.39	0.973	8.36	16.56
5230	46	13.5	8.97	0.429	9.40	16.56
		27	8.90	0.404	9.30	16.56
		40.5	8.83	0.410	9.24	16.56
		54	8.60	0.370	8.97	16.56
		81	8.60	0.518	9.12	16.56
		108	8.48	0.623	9.11	16.56
		121.5	8.42	0.672	9.09	16.56
		135	8.39	0.739	9.13	16.56
		162	8.22	0.947	9.17	16.56
		180	8.29	0.973	9.26	16.56

□ TEST RESULTS\_Ant.1

Conducted Output Power Measurements (802.11ac\_40 MHz BW Mode: 5190~5230)

802.11ac Mode		Rate (Mbps)	Measured Power(dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.					
5190	38	13.5	8.01	0.429	8.44	16.65
		27	7.87	0.404	8.27	16.65
		40.5	7.88	0.410	8.29	16.65
		54	7.76	0.370	8.13	16.65
		81	7.63	0.518	8.14	16.65
		108	7.52	0.623	8.14	16.65
		121.5	7.52	0.672	8.19	16.65
		135	7.48	0.739	8.21	16.65
		162	7.32	0.947	8.26	16.65
		180	7.40	0.973	8.37	16.65
5230	46	13.5	9.05	0.429	9.48	16.65
		27	8.97	0.404	9.38	16.65
		40.5	8.76	0.410	9.17	16.65
		54	8.60	0.370	8.97	16.65
		81	8.68	0.518	9.20	16.65
		108	8.55	0.623	9.17	16.65
		121.5	8.50	0.672	9.17	16.65
		135	8.48	0.739	9.22	16.65
		162	8.33	0.947	9.27	16.65
		180	8.33	0.973	9.30	16.65

□ TEST RESULTS\_Sum Data of Ant.0 and Ant.1

Conducted Output Power Measurements (802.11ac\_40 MHz BW Mode: 5190~5230)

802.11ac Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
5190	38	13.5	11.47	13.59
		27	11.37	13.59
		40.5	11.34	13.59
		54	11.20	13.59
		81	11.21	13.59
		108	11.20	13.59
		121.5	11.23	13.59
		135	11.24	13.59
		162	11.32	13.59
		180	11.38	13.59
5230	46	13.5	12.45	13.59
		27	12.35	13.59
		40.5	12.22	13.59
		54	11.98	13.59
		81	12.17	13.59
		108	12.15	13.59
		121.5	12.14	13.59
		135	12.19	13.59
		162	12.23	13.59
		180	12.29	13.59

□ TEST RESULTS\_Ant.0

Conducted Output Power Measurements (802.11ac\_80 MHz BW Mode: 5210)

802.11ac Mode		Rate (Mbps)	Measured Power(dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.					
5210	42	29.3	6.26	0.266	6.53	16.56
		58.5	6.16	0.469	6.63	16.56
		87.8	6.12	0.638	6.76	16.56
		117	5.93	0.764	6.70	16.56
		175.5	5.78	0.976	6.76	16.56
		234	5.57	1.136	6.71	16.56
		263.3	5.46	1.218	6.68	16.56
		292.5	5.39	1.264	6.66	16.56
		351	5.31	1.368	6.67	16.56
		390	5.30	1.442	6.74	16.56

□ TEST RESULTS\_Ant.1

Conducted Output Power Measurements (802.11ac\_80 MHz BW Mode: 5210)

802.11ac Mode		Rate (Mbps)	Measured Power(dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.					
5210	42	29.3	6.13	0.266	6.39	16.65
		58.5	6.00	0.469	6.47	16.65
		87.8	5.86	0.638	6.50	16.65
		117	5.72	0.764	6.49	16.65
		175.5	5.52	0.976	6.49	16.65
		234	5.42	1.136	6.55	16.65
		263.3	5.30	1.218	6.52	16.65
		292.5	5.21	1.264	6.47	16.65
		351	5.18	1.368	6.55	16.65
		390	5.00	1.442	6.44	16.65

□ TEST RESULTS\_Sum Data of Ant.0 and Ant.1

Conducted Output Power Measurements (802.11ac Mode: 5210)

802.11ac Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
5210	42	29.3	9.47	13.59
		58.5	9.56	13.59
		87.8	9.64	13.59
		117	9.61	13.59
		175.5	9.64	13.59
		234	9.64	13.59
		263.3	9.61	13.59
		292.5	9.58	13.59
		351	9.62	13.59
		390	9.60	13.59

Note :


1. In order to simplify the report, attached plots were only the highest conducted power channel.

Ant.0

40 MHz BW


▣ RESULT PLOTS (5190 MHz ~5230 MHz)

Conducted Output Power (802.11n-CH 46) 135 Mbps

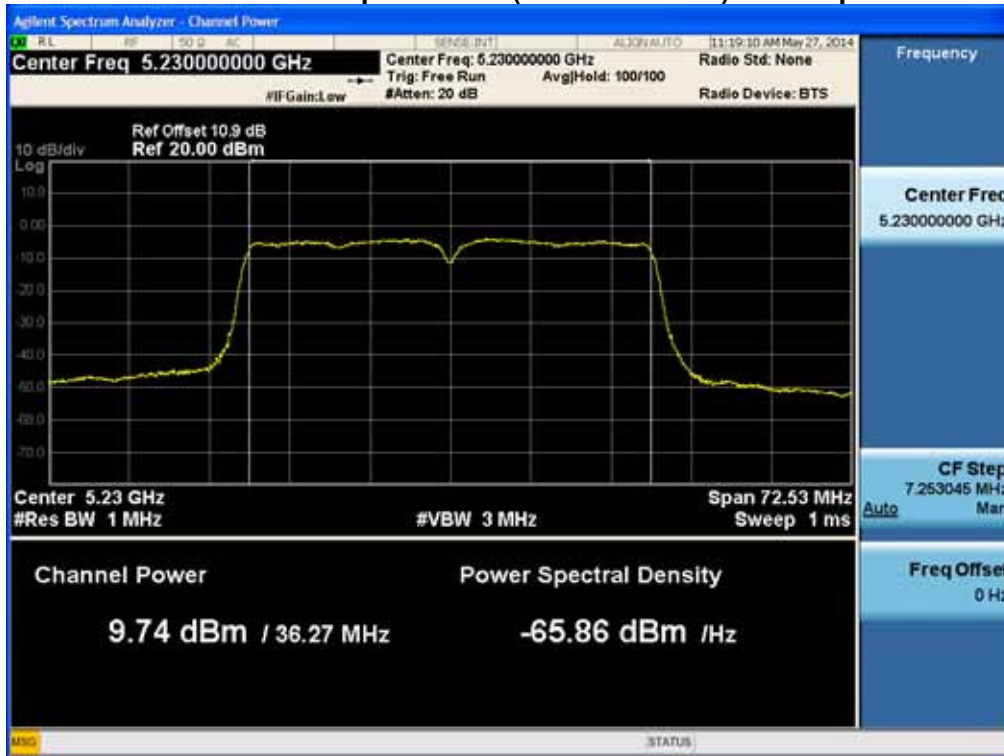

▣ RESULT PLOTS (5190 ~ 5230 MHz)

Conducted Output Power (802.11ac-CH 46) 13.5 Mbps

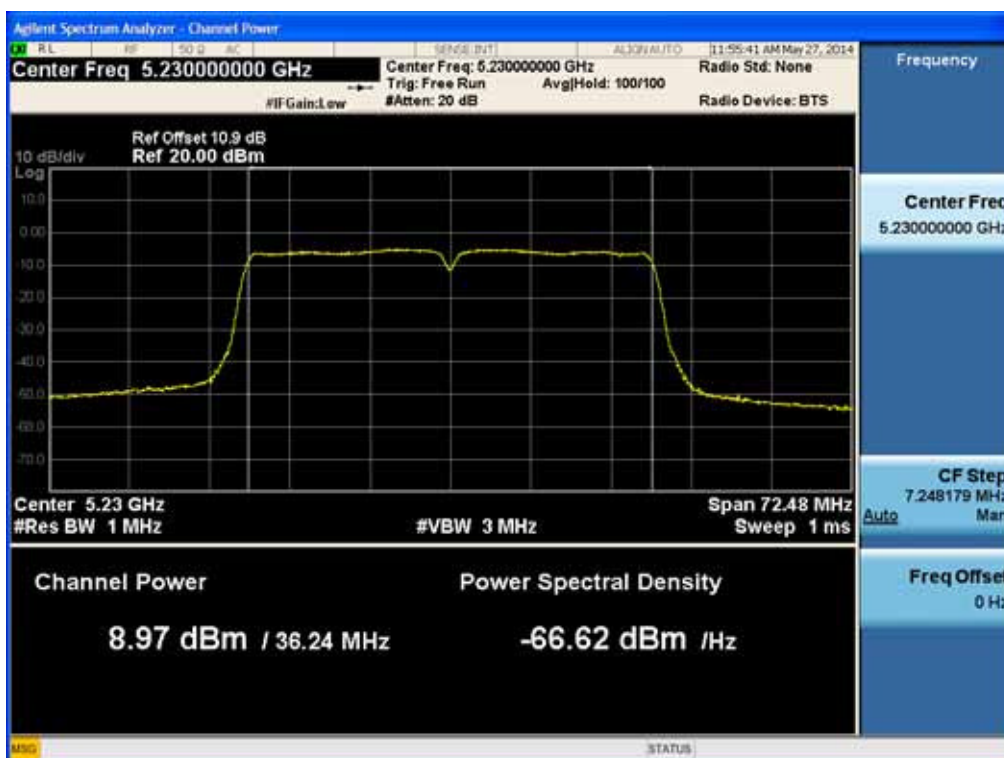

FCC PT.15.407 TEST REPORT	FCC & IC CERTIFICATION REPORT			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCT-R-1406-F027	Date of Issue: June 18, 2014	EUT Type: WLAN Access Point	FCC ID: A3LWEA4121	IC: 649E-WEA4121

80 MHz BW

RESULT PLOTS (5210 MHz)

Conducted Output Power (802.11ac-CH 42) 87.8 Mbps




FCC PT.15.407 TEST REPORT	FCC & IC CERTIFICATION REPORT			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCT-R-1406-F027	Date of Issue: June 18, 2014	EUT Type: WLAN Access Point	FCC ID: A3LWEA412I	IC: 649E-WEA412I

Ant.1

40 MHz BW

RESULT PLOTS (5190 MHz ~5230 MHz)

Conducted Output Power (802.11n-CH 46) 135 Mbps

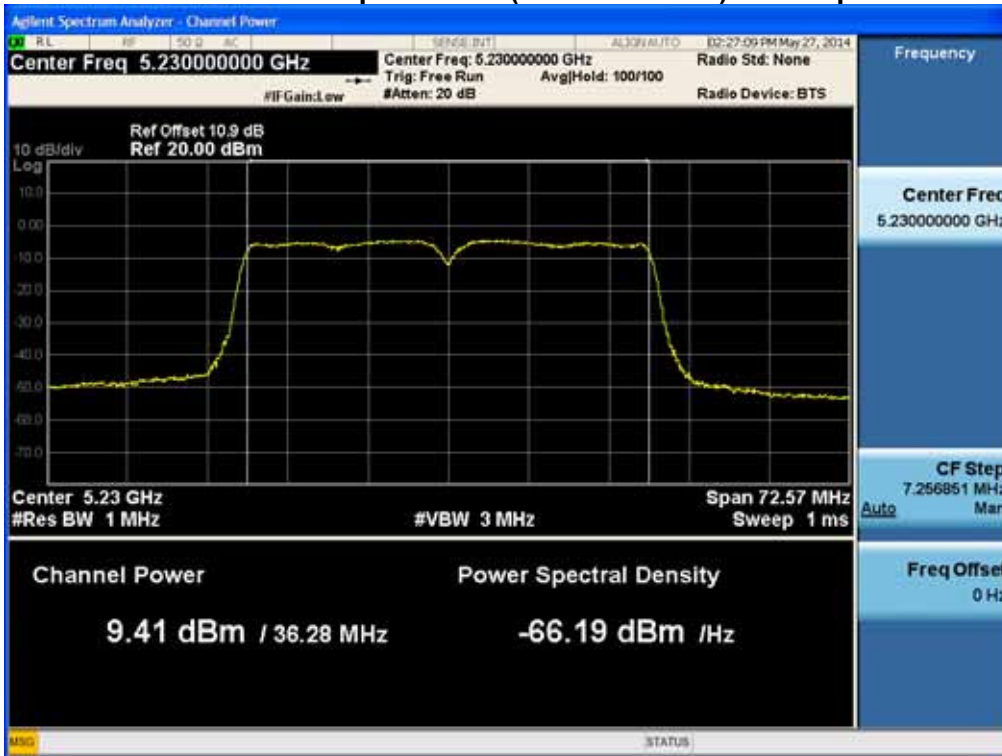

RESULT PLOTS (5190 ~ 5230 MHz)

Conducted Output Power (802.11ac-CH 46) 13.5 Mbps



FCC PT.15.407 TEST REPORT	FCC & IC CERTIFICATION REPORT			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCT-R-1406-F027	Date of Issue: June 18, 2014	EUT Type: WLAN Access Point	FCC ID: A3LWEA4121	IC: 649E-WEA4121



80 MHz BW

RESULT PLOTS (5210 MHz)

Conducted Output Power (802.11ac-CH 42) 234 Mbps



FCC PT.15.407 TEST REPORT		FCC & IC CERTIFICATION REPORT		<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCT-R-1406-F027	Date of Issue: June 18, 2014	EUT Type: WLAN Access Point	FCC ID: A3LWEA412I	IC: 649E-WEA412I

## 8.5 POWER SPECTRAL DENSITY

The peak power density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating in transmission mode at the appropriate frequencies. The maximum permissible peak power spectral density is 4 dBm/ MHz in the 5.15 GHz – 5.25 GHz band.

### □ Limit(CDD)

#### 1. Maximum Conducted Power Spectral Density(for FCC & IC)

Operating Mode	Band	Mode	Ant. Port	Ant. Gain (dBi)	Limit (dBm)
SISO	UNII 1	802.11a,n,ac	0	6.34	3.57
			1	6.43	3.66
MIMO(2 TX)	UNII 1	802.11a,n,ac	0 & 1	9.40	0.6


Note : Above the limits is calculated according to antenna gain. Because antenna gain is higher than 6 dBi.

#### 2. EIRP Sepctral Density : 10 dBm

Note : The limits of conducted power spectral density were applied the antenna gain.

Therefore, if conducted power is pass, EIRP is also pass. So, we attached only conducted power table.

### □ TEST CONFIGURATION

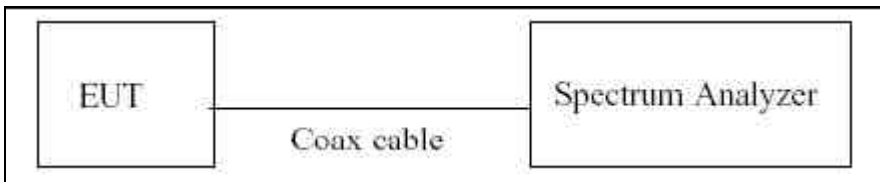

### □ TEST PROCEDURE

We tested according to Method in KDB 789033(issued 04/08/2013).

The spectrum analyzer is set to :

1. Set span to encompass the entire emission bandwidth(EBW) of the signal.
2. RBW = 1 MHz.
3. VBW ≥ 3 MHz.
4. Number of points in sweep ≥ 2\*span/RBW.
5. Sweep time = auto.
6. Detector = RMS(i.e., power averaging), if available. Otherwise, use sample detector mode.
7. Do not use sweep triggering. Allow the sweep to “free run”.
8. Trace average at least 100 traces in power averaging(RMS) mode

FCC PT.15.407 TEST REPORT		FCC & IC CERTIFICATION REPORT		<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCT-R-1406-F027	Date of Issue: June 18, 2014	EUT Type: WLAN Access Point	FCC ID: A3LWEA412I	IC: 649E-WEA412I



9. Use the peak search function on the spectrum analyzer to find the peak of the spectrum.
10. If Method SA-2 was used, add  $10 \log(1/x)$ , where  $x$  is the duty cycle, to the peak of the spectrum.

#### □ Sample Calculation

PSD = Reading Value + ATT loss + Cable loss(1 ea) + Duty Cycle Factor

Output Power = -5 dBm + 10 dB + 0.8 dB + 0.21 dB = 16.01 dBm

Note :

1. Spectrum reading values are not plot data. The PSD results in plot is already including the actual values of loss for the attenuator and cable combination.
2. Spectrum offset = Attenuator loss + Cable loss
3. We apply to the offset in the UNII 1 band that was rounded off to the closest tenth dB. Actual value of loss for the attenuator and cable combination is below table. We used the particular cable type that is supported by manufacture.

Band	Loss(dB)
UNII 1	10.9

(Actual value of loss for the attenuator and cable combination)

FCC PT.15.407 TEST REPORT		FCC & IC CERTIFICATION REPORT		<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCT-R-1406-F027	Date of Issue: June 18, 2014	EUT Type: WLAN Access Point	FCC ID: A3LWEA412I	IC: 649E-WEA412I

Ant.0

□ TEST RESULTS

Conducted Power Density Measurements

Frequency (MHz)	Channel No.	Mode	Test Result				
			Measured Power Density (dBm)	Duty Cycle Factor (dB)	Measured Power Density(dBm) + Duty Cycle Factor	Limit (dBm)	Pass/Fail
5180	36	802.11a	-3.864	0.308139	-3.556	3.57	Pass
5200	40		-3.958	0.547868	-3.410		Pass
5240	48		-3.753	0.45438	-3.299		Pass
5180	36	802.11n 20MHz BW	-3.932	0.359886	-3.572		Pass
5200	40		-3.953	0.359886	-3.593		Pass
5240	48		-3.970	0.209738	-3.760		Pass
5180	36	802.11ac 20MHz BW	-3.726	0.209738	-3.516		Pass
5200	40		-3.879	0.209738	-3.669		Pass
5240	48		-4.146	0.209738	-3.936		Pass
5190	38	802.11n 40MHz BW	-6.052	0.428957	-5.623		Pass
5230	46		-4.175	0.738818	-3.436		Pass
5190	38	802.11ac 40MHz BW	-5.893	0.428957	-5.464		Pass
5230	46		-5.022	0.428957	-4.593		Pass
5210	42	802.11ac 80MHz BW	-11.377	0.638336	-10.739		Pass

Ant.1

□ TEST RESULTS

Conducted Power Density Measurements

Frequency (MHz)	Channel No.	Mode	Test Result				
			Measured Power Density (dBm)	Duty Cycle Factor (dB)	Measured Power Density(dBm) + Duty Cycle Factor	Limit (dBm)	Pass/Fail
5180	36	802.11a	-4.030	0.278291	-3.752	3.66	Pass
5200	40		-3.825	0.45438	-3.371		Pass
5240	48		-3.801	0.45438	-3.347		Pass
5180	36	802.11n 20MHz BW	-3.982	0.391431	-3.591		Pass
5200	40		-4.080	0.359886	-3.720		Pass
5240	48		-3.722	0.435384	-3.287		Pass
5180	36	802.11ac 20MHz BW	-3.244	0.209738	-3.034		Pass
5200	40		-3.644	0.209738	-3.434		Pass
5240	48		-4.067	0.209738	-3.857		Pass
5190	38	802.11n 40MHz BW	-6.232	0.738818	-5.493		Pass
5230	46		-4.354	0.738818	-3.615		Pass
5190	38	802.11ac 40MHz BW	-6.040	0.428957	-5.611		Pass
5230	46		-5.172	0.428957	-4.743		Pass
5210	42	802.11ac 80MHz BW	-11.784	1.1365	-10.648	Pass	

Sum Data of Port Ant.0 and Ant.1

□ TEST RESULTS

Conducted Power Density Measurements

Frequency (MHz)	Channel No.	Mode	Test Result		
			Power Density (dBm)	Limit (dBm)	Pass/Fail
5180	36	802.11a	-0.643	0.6	Pass
5200	40		-0.380		Pass
5240	48		-0.313		Pass
5180	36	802.11n 20MHz BW	-0.571		Pass
5200	40		-0.646		Pass
5240	48		-0.507		Pass
5180	36	802.11ac 20MHz BW	-0.258		Pass
5200	40		-0.540		Pass
5240	48		-0.886		Pass
5190	38	802.11n	-2.547		Pass
5230	46	40MHz BW	-0.514		Pass
5190	38	802.11ac	-2.527		Pass
5230	46	40MHz BW	-1.657		Pass
5210	42	802.11ac 80MHz BW	-7.683		Pass

Note :


1. In order to simplify the report, attached plots were only the highest PSD channel.

Ant.0


RESULT PLOTS

20 MHz BW

Power Spectral Density (802.11a-CH 48)

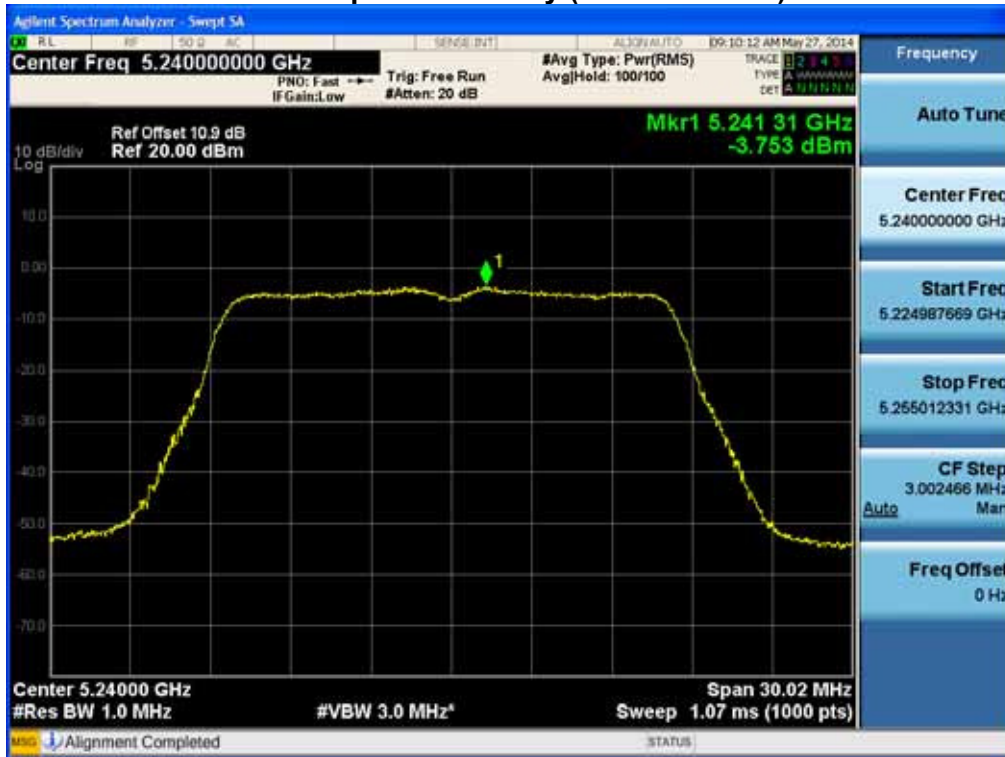


Power Spectral Density (802.11n-CH 36)

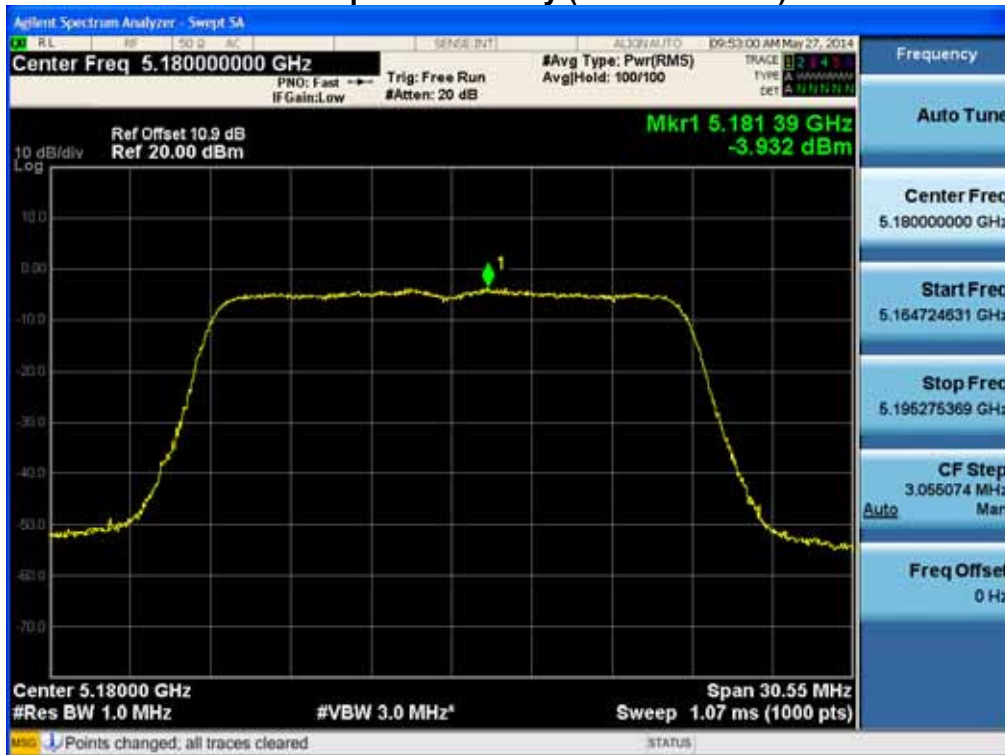


FCC PT.15.407 TEST REPORT	FCC & IC CERTIFICATION REPORT			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCT-R-1406-F027	Date of Issue: June 18, 2014	EUT Type: WLAN Access Point	FCC ID: A3LWEA4121	IC: 649E-WEA4121

### Power Spectral Density (802.11ac-CH 36)

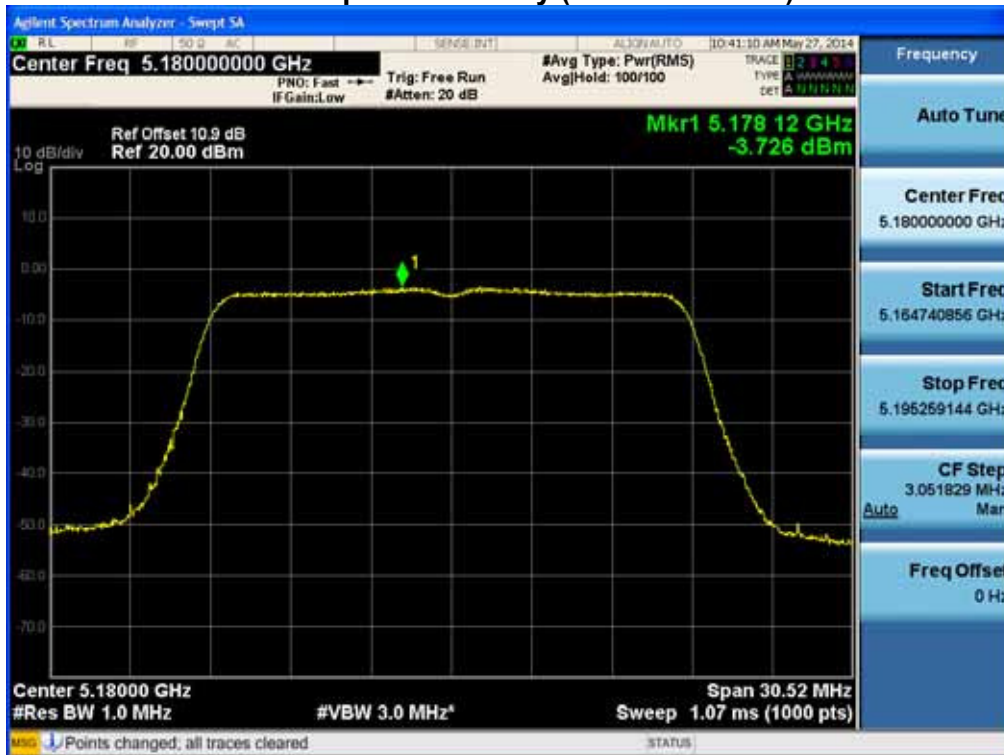


40 MHz BW

### Power Spectral Density (802.11n-CH 46)

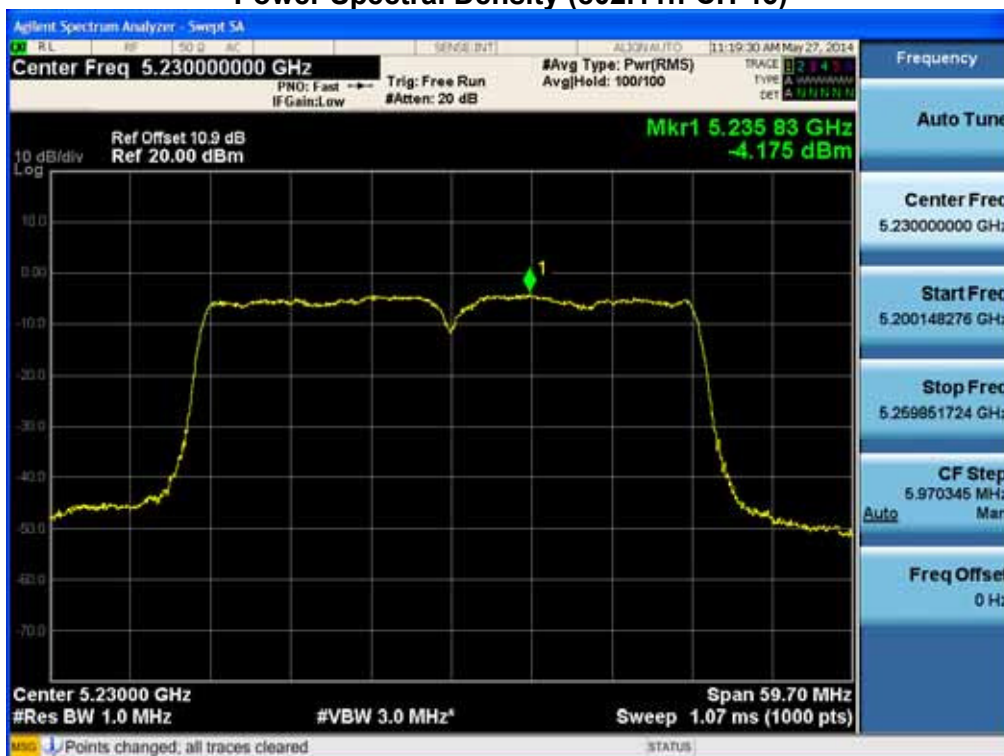


FCC PT.15.407 TEST REPORT	FCC & IC CERTIFICATION REPORT			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCT-R-1406-F027	Date of Issue: June 18, 2014	EUT Type: WLAN Access Point	FCC ID: A3LWEA412I	IC: 649E-WEA412I

### Power Spectral Density (802.11ac-CH 46)

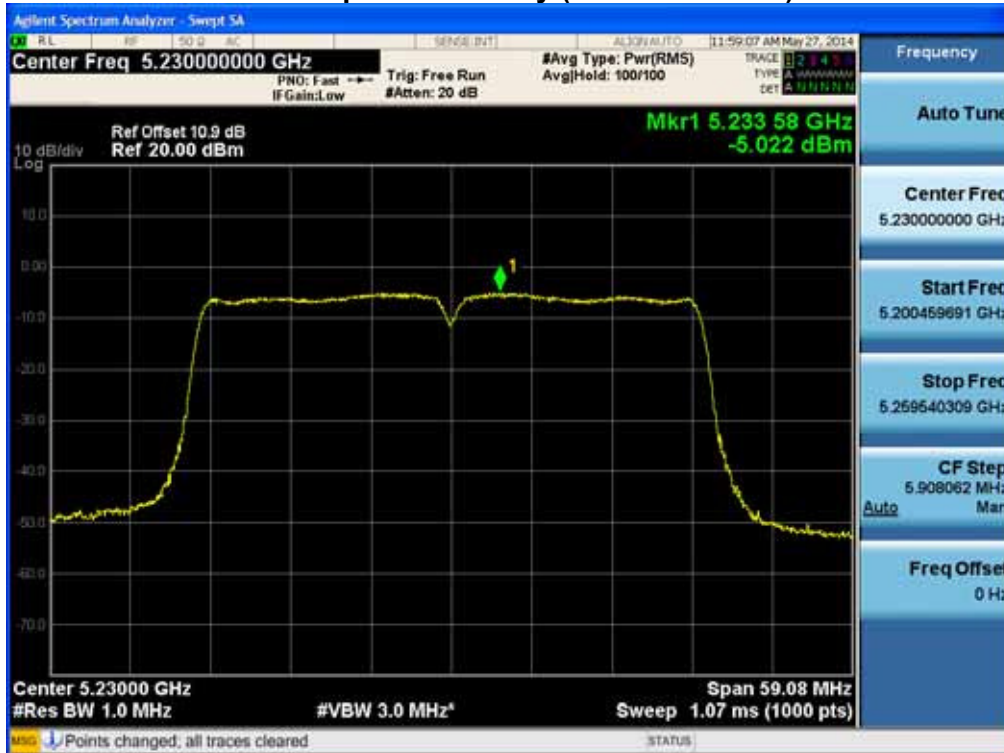

80 MHz BW

### Power Spectral Density (802.11ac-CH 42)

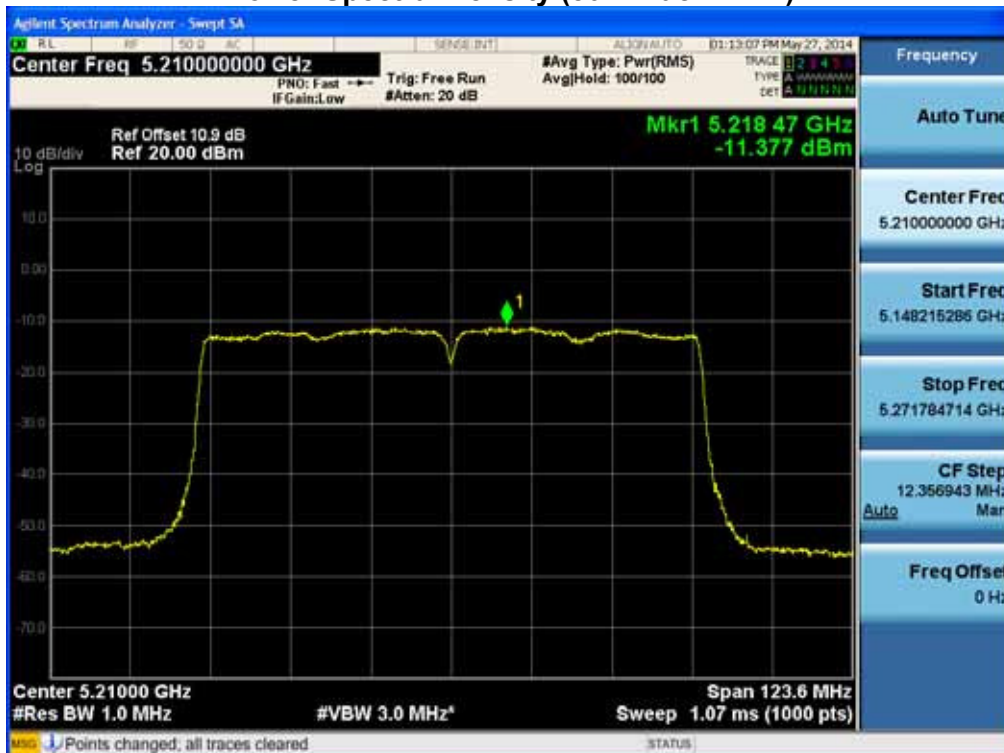


FCC PT.15.407 TEST REPORT	FCC & IC CERTIFICATION REPORT			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCT-R-1406-F027	Date of Issue: June 18, 2014	EUT Type: WLAN Access Point	FCC ID: A3LWEA4121	IC: 649E-WEA4121

Ant.1


RESULT PLOTS

20 MHz BW

Power Spectral Density (802.11a-CH 48)

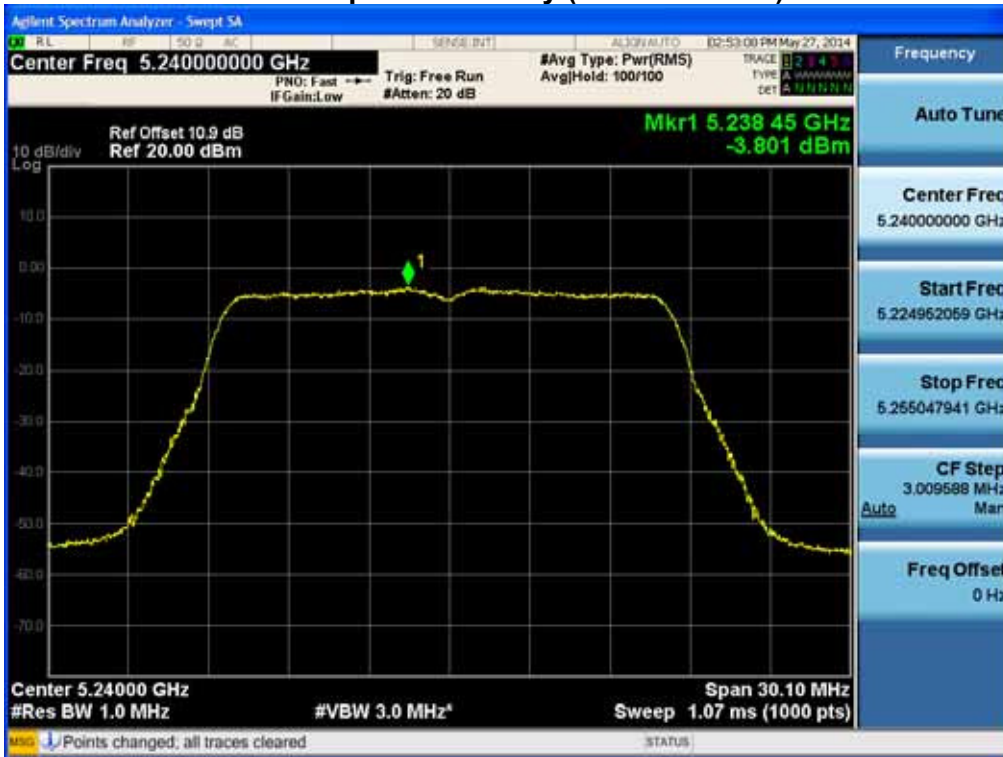


Power Spectral Density (802.11n-CH 48)

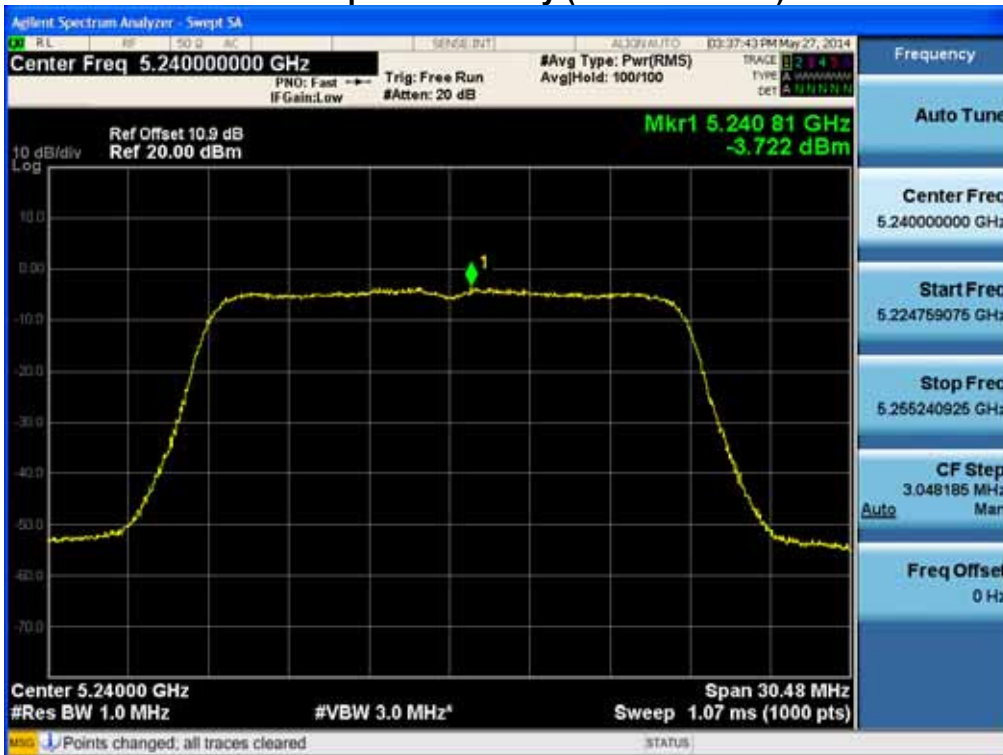


FCC PT.15.407 TEST REPORT	FCC & IC CERTIFICATION REPORT			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCT-R-1406-F027	Date of Issue: June 18, 2014	EUT Type: WLAN Access Point	FCC ID: A3LWEA4121	IC: 649E-WEA4121

### Power Spectral Density (802.11ac-CH 36)

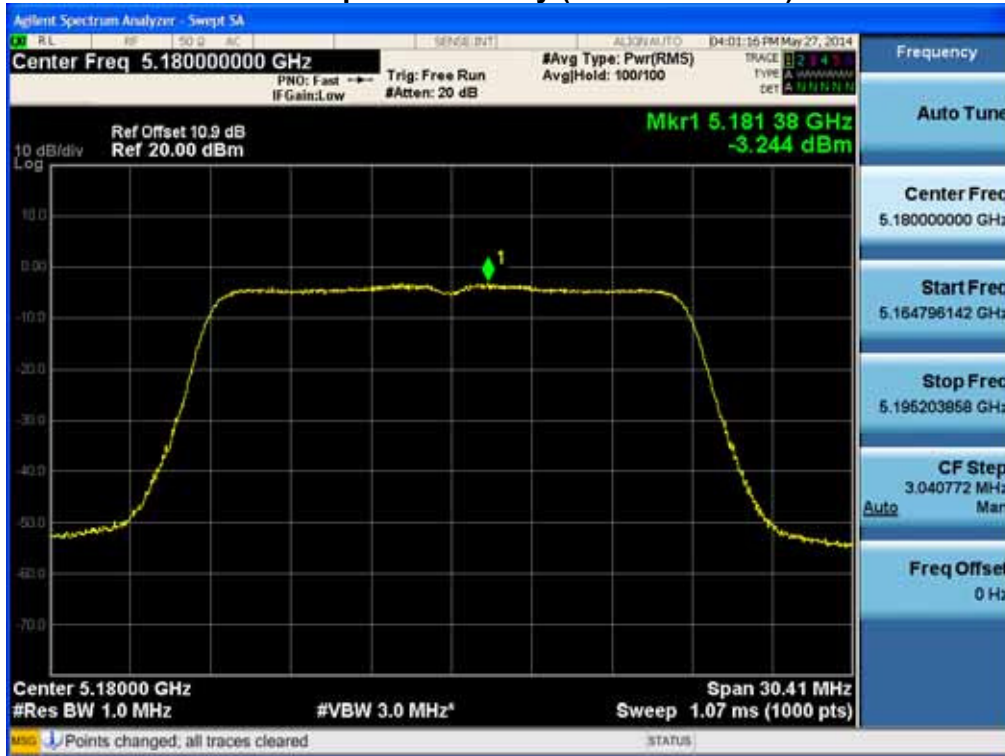


40 MHz BW

### Power Spectral Density (802.11n-CH 46)

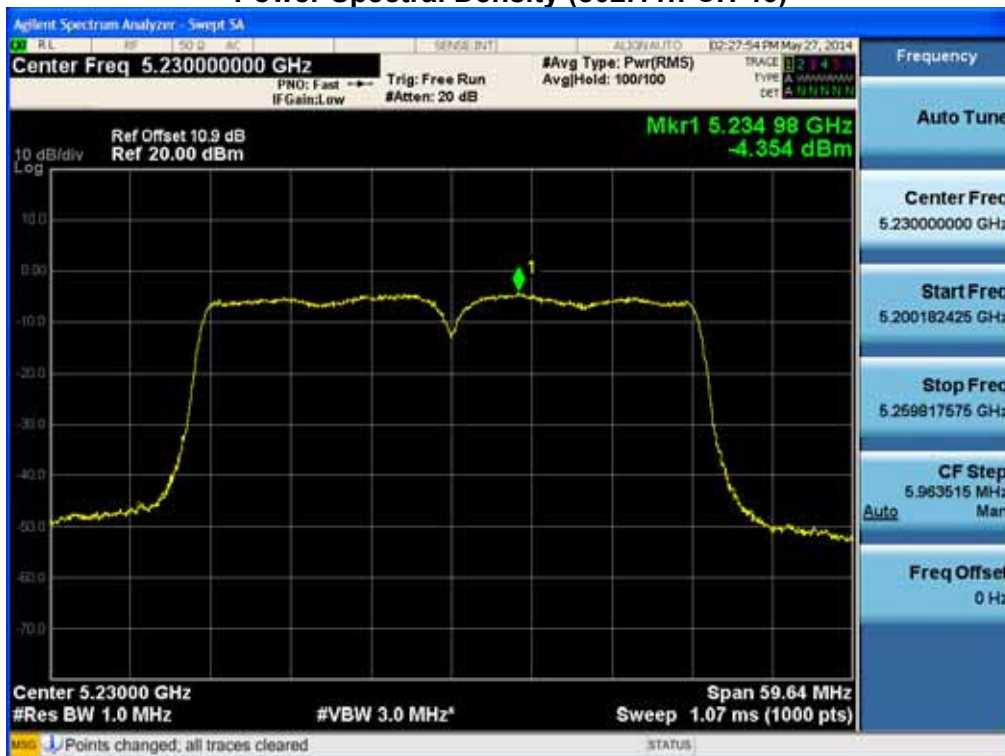


FCC PT.15.407 TEST REPORT	FCC & IC CERTIFICATION REPORT			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCT-R-1406-F027	Date of Issue: June 18, 2014	EUT Type: WLAN Access Point	FCC ID: A3LWEA412I	IC: 649E-WEA412I

### Power Spectral Density (802.11ac-CH 46)

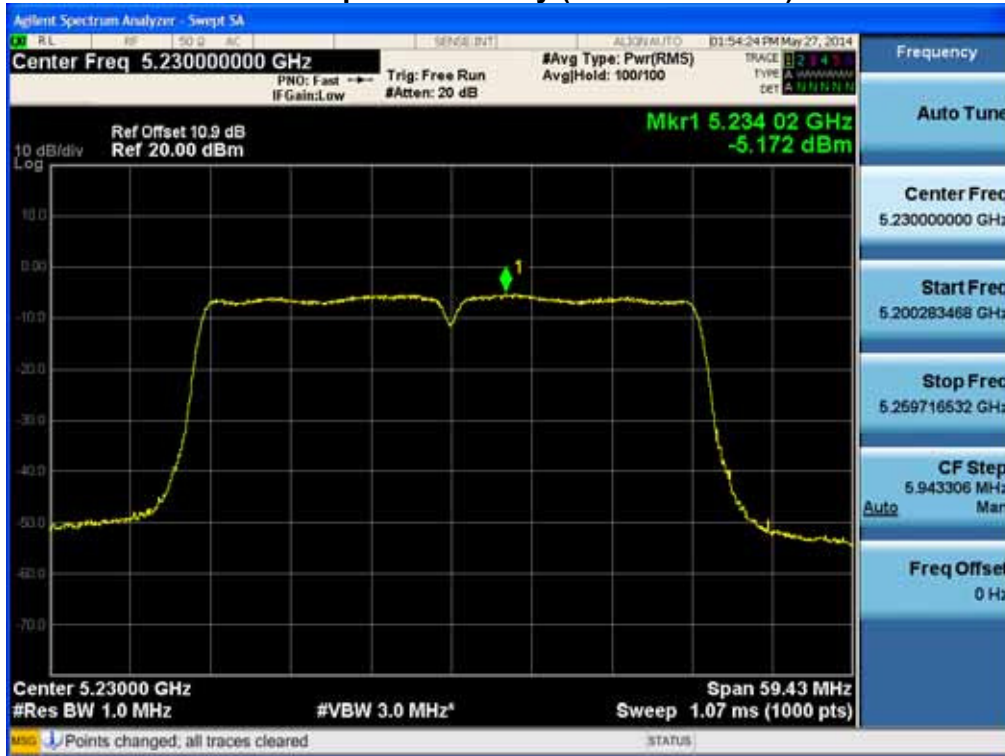

80 MHz BW

### Power Spectral Density (802.11ac-CH 42)

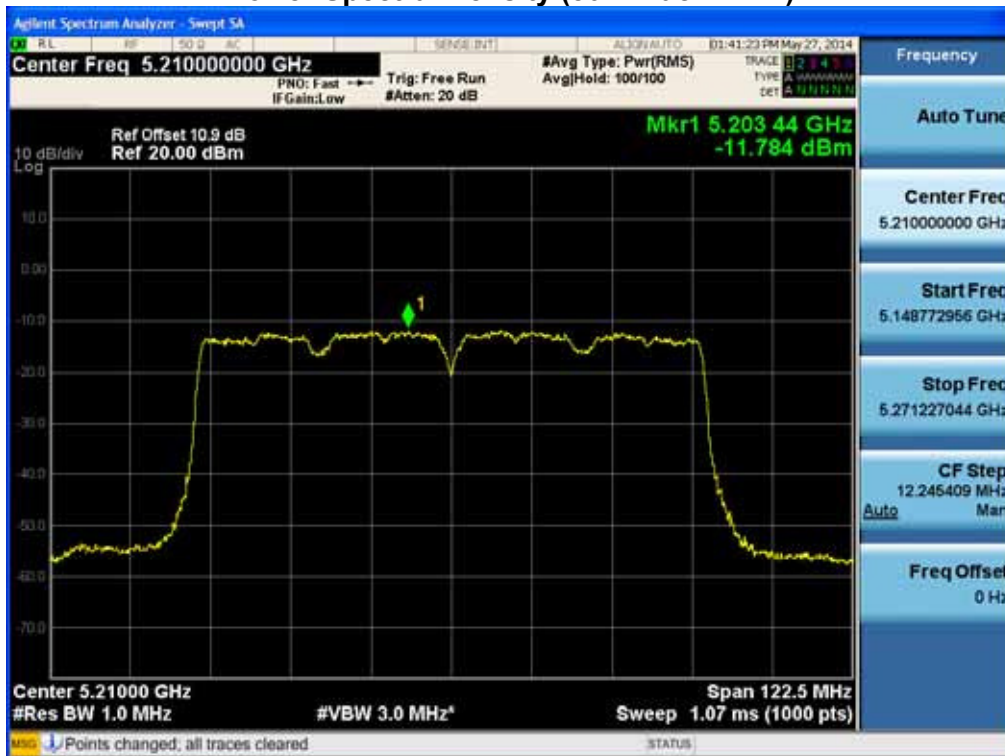


FCC PT.15.407 TEST REPORT	FCC & IC CERTIFICATION REPORT			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCT-R-1406-F027	Date of Issue: June 18, 2014	EUT Type: WLAN Access Point	FCC ID: A3LWEA4121	IC: 649E-WEA4121

## 8.6 PEAK EXCURSION RATIO

The spectrum analyzer was connected to the antenna terminal while the EUT was operating in the continuous transmission mode at the appropriate center frequencies. The largest permissible difference between the modulation envelope(measured using a peak hold function) and the maximum conducted output power 13 dB/MHz.

### □ TEST CONFIGURATION

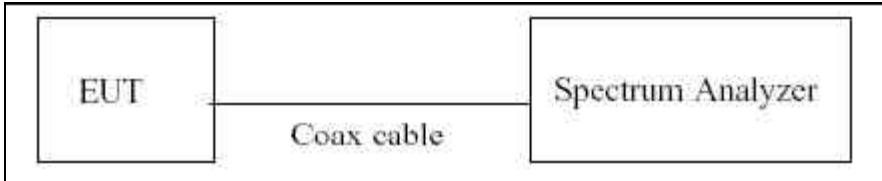

### □ TEST PROCEDURE

We tested according to KDB 789033(issued 04/08/2013).

The spectrum analyzer is set to :

1. Span = Set the span to view the entire emission bandwidth.
2. RBW = 1 MHz
3. VBW  $\geq$  3 MHz
4. Detector Mode = Peak
5. Trace Mode = Max hold
6. Allow the sweeps to continue until the trace stabilizes.
7. Use the peak search function to find the peak of the spectrum.
8. Use the procedure to measure the PPSD
9. Compute the ratio of the maximum of the peak-max-hold spectrum to the PPSD.

Note :

1. The PSD results in plot is already including the actual values of loss for the attenuator and cable combination.
2. Spectrum offset = Attenuator loss + Cable loss
3. We apply to the offset in the UNII 1 band that was rounded off to the closest tenth dB. Actual value of loss for the attenuator and cable combination is below table. We used the particular cable type that is supported by manufacture.

Band	Loss(dB)
UNII 1	10.9


(Actual value of loss for the attenuator and cable combination)

FCC PT.15.407 TEST REPORT		FCC & IC CERTIFICATION REPORT		<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCT-R-1406-F027	Date of Issue: June 18, 2014	EUT Type: WLAN Access Point	FCC ID: A3LWEA412I	IC: 649E-WEA412I


Ant.0

20 MHz BW

Peak Excursion Ratio (802.11a-CH 36)

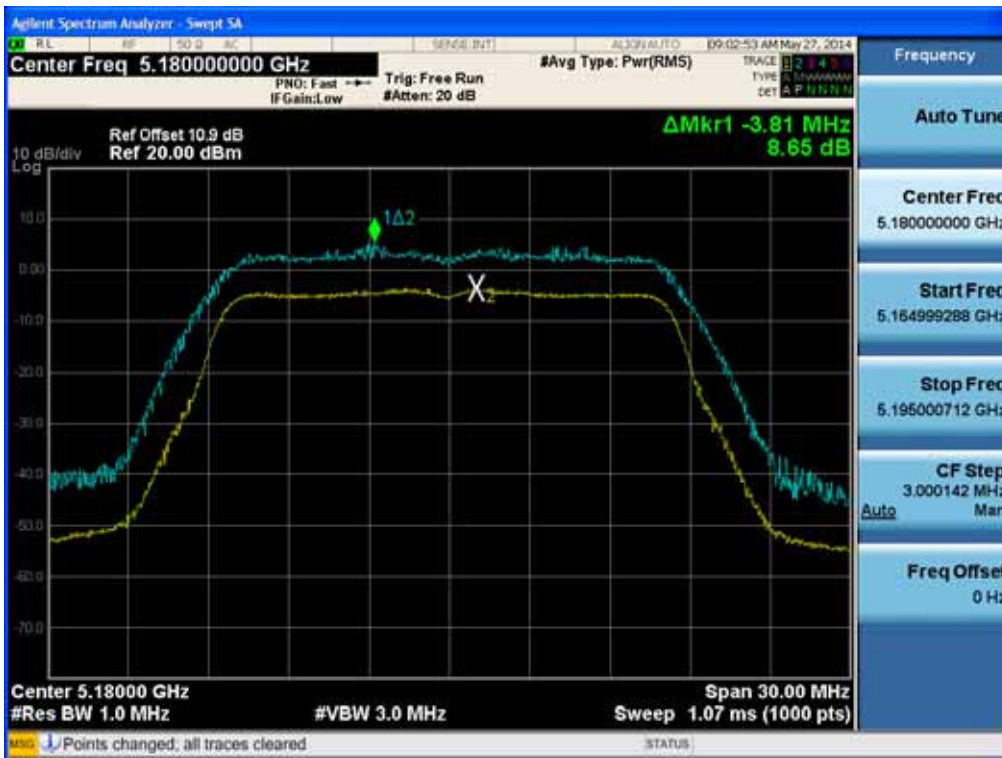

Peak Excursion Ratio (802.11a-CH 40)

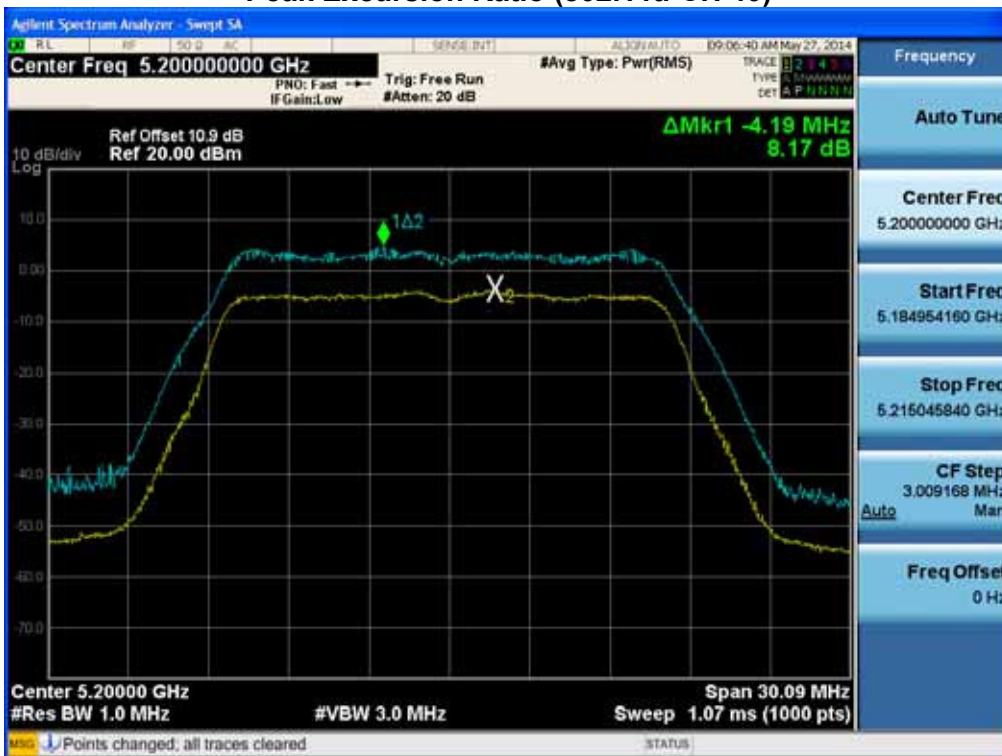


FCC PT.15.407 TEST REPORT	FCC & IC CERTIFICATION REPORT			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCT-R-1406-F027	Date of Issue: June 18, 2014	EUT Type: WLAN Access Point	FCC ID: A3LWEA412I	IC: 649E-WEA412I

### Peak Excursion Ratio (802.11a-CH 48)




### Peak Excursion Ratio (802.11n-CH 36)

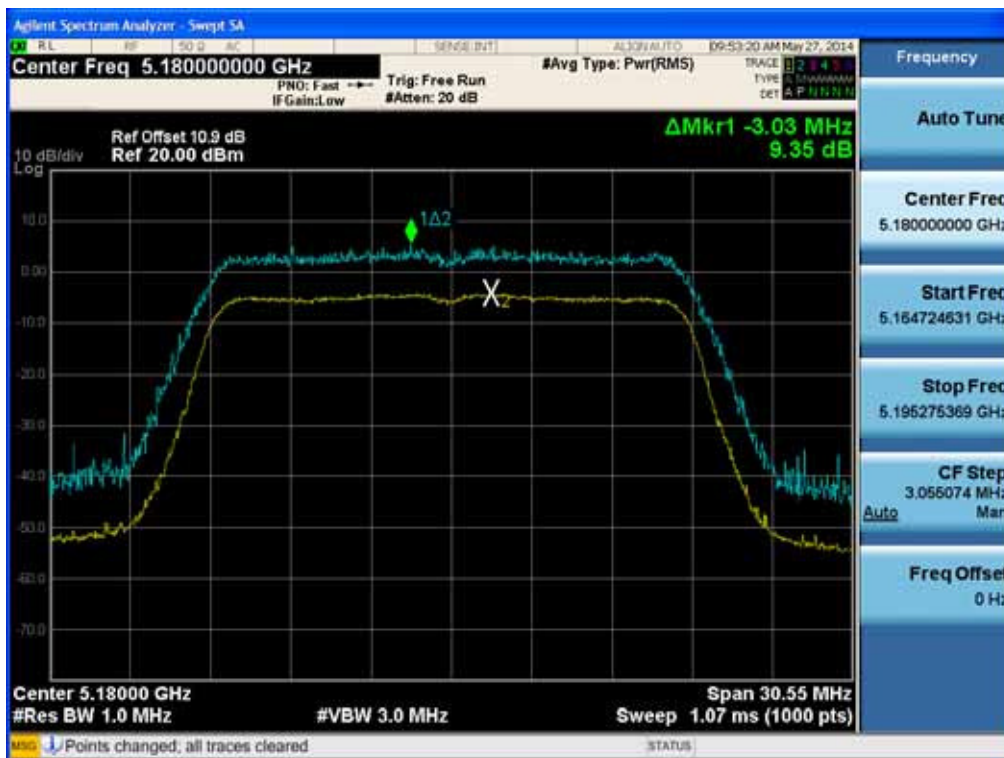


FCC PT.15.407 TEST REPORT	FCC & IC CERTIFICATION REPORT			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCT-R-1406-F027	Date of Issue: June 18, 2014	EUT Type: WLAN Access Point	FCC ID: A3LWEA4121	IC: 649E-WEA4121

### Peak Excursion Ratio (802.11n-CH 40)

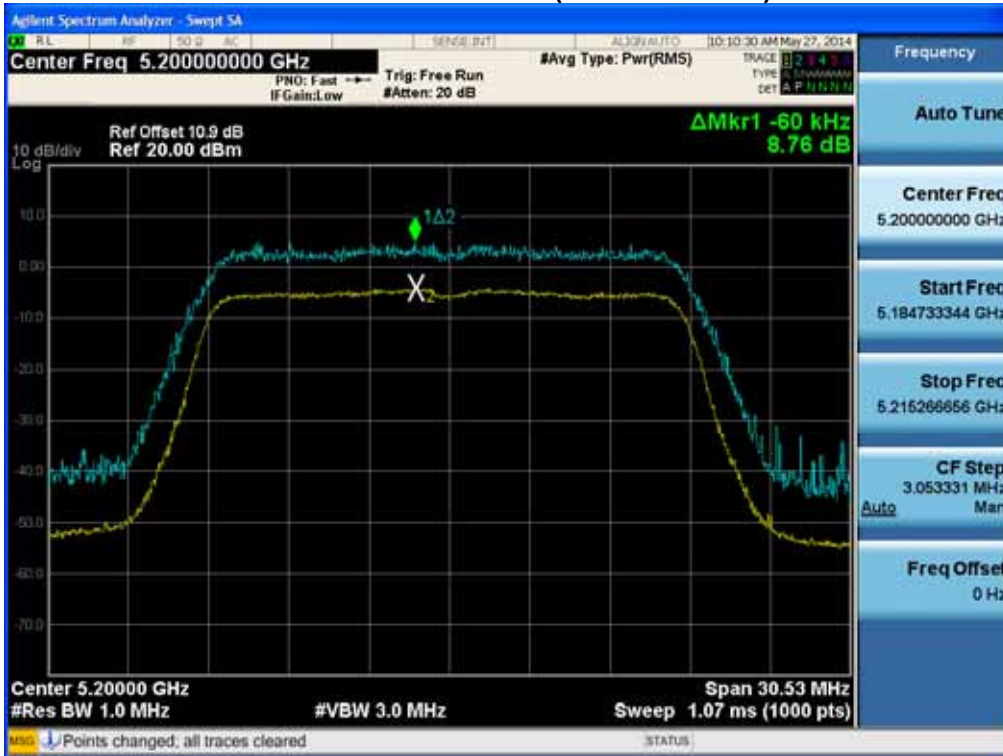


### Peak Excursion Ratio (802.11n-CH 48)

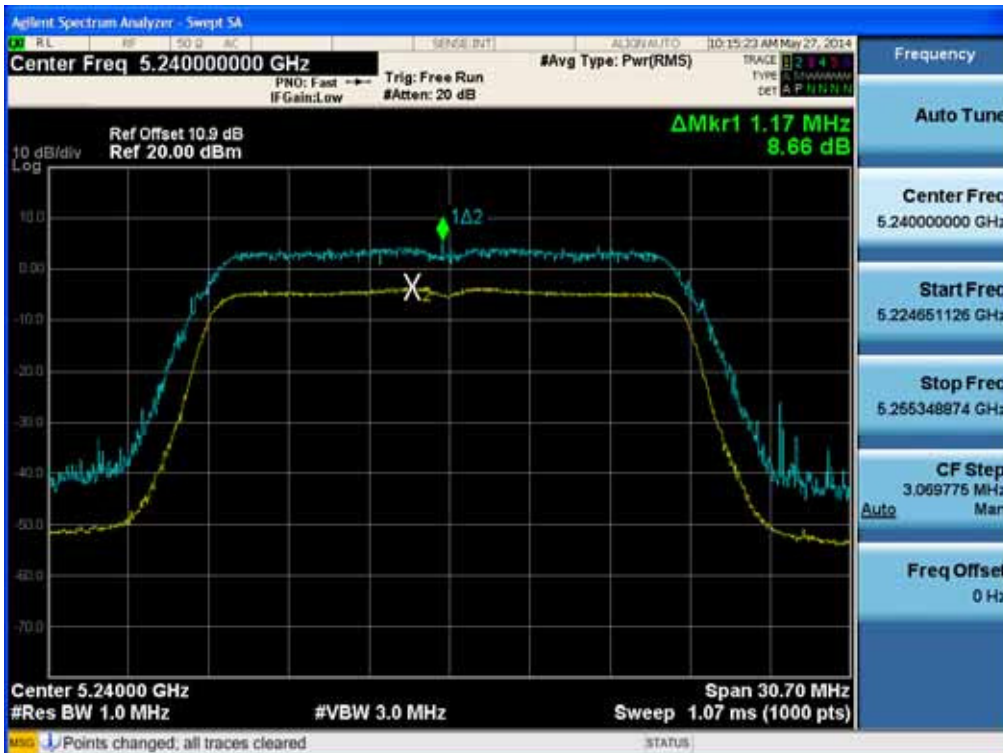


FCC PT.15.407 TEST REPORT	FCC & IC CERTIFICATION REPORT			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCT-R-1406-F027	Date of Issue: June 18, 2014	EUT Type: WLAN Access Point	FCC ID: A3LWEA412I	IC: 649E-WEA412I


### Peak Excursion Ratio (802.11ac-CH 36)

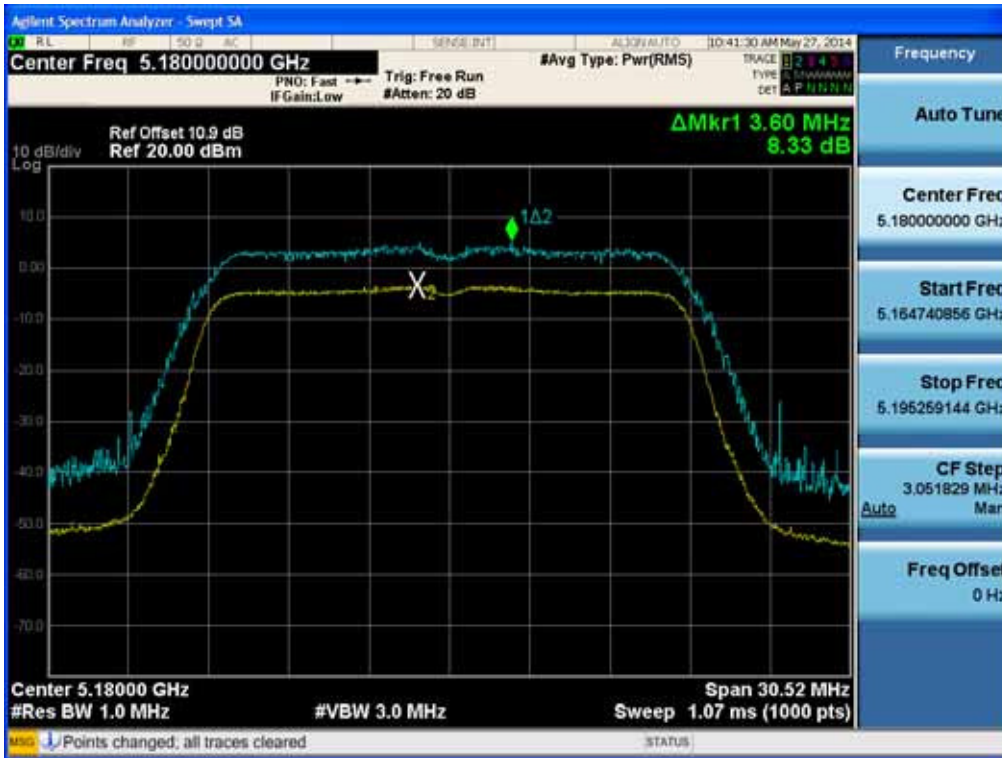

### Peak Excursion Ratio (802.11ac-CH 40)

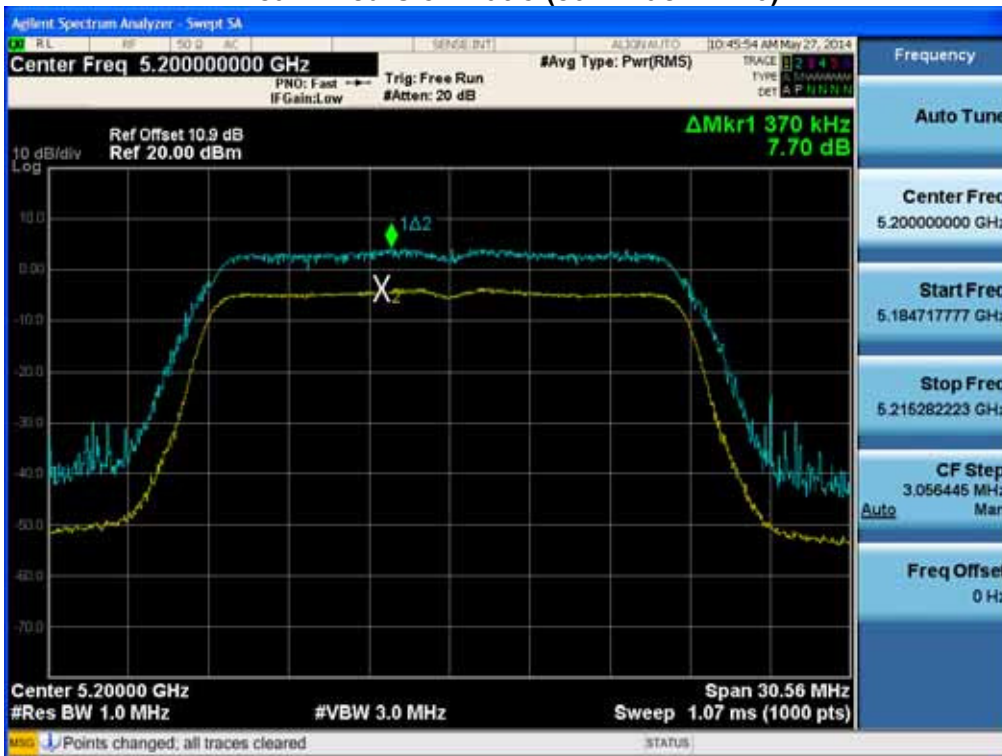


### Peak Excursion Ratio (802.11ac-CH 48)

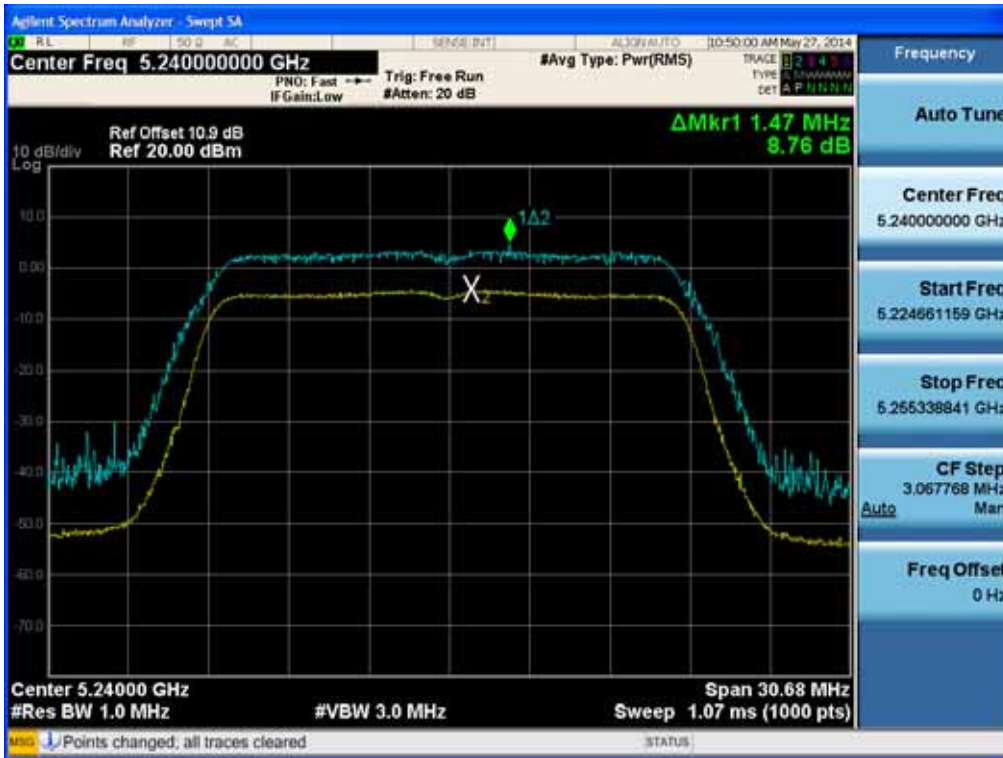

40 MHz BW

### Peak Excursion Ratio (802.11n-CH 38)

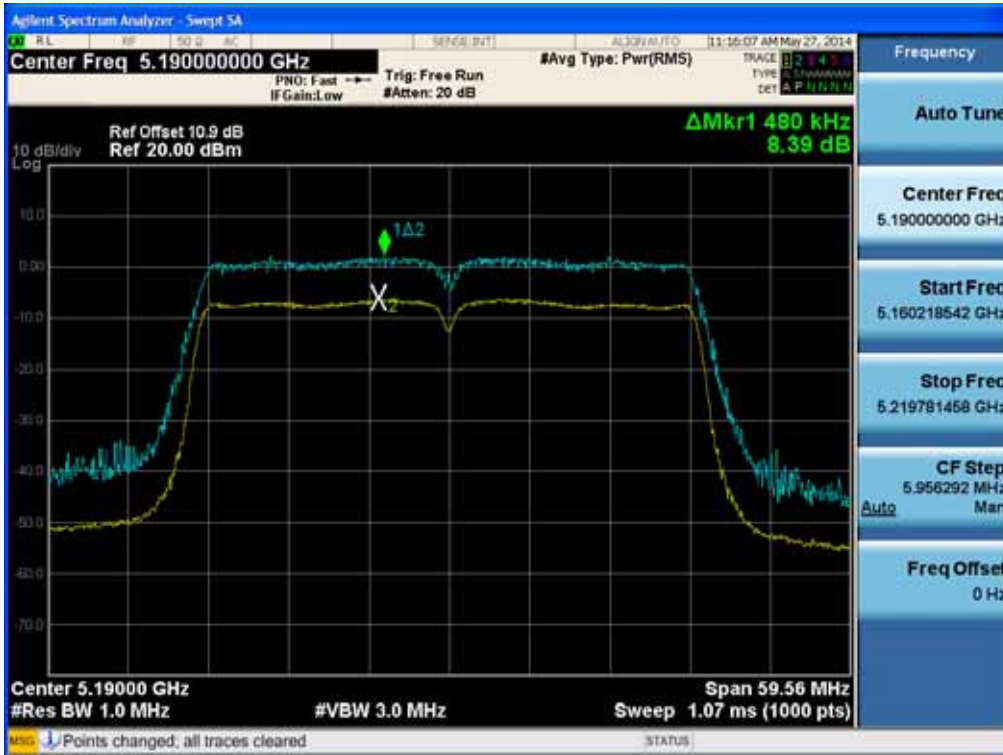


FCC PT.15.407 TEST REPORT	FCC & IC CERTIFICATION REPORT			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCT-R-1406-F027	Date of Issue: June 18, 2014	EUT Type: WLAN Access Point	FCC ID: A3LWEA4121	IC: 649E-WEA4121

### Peak Excursion Ratio (802.11n-CH 46)




### Peak Excursion Ratio (802.11ac-CH 38)

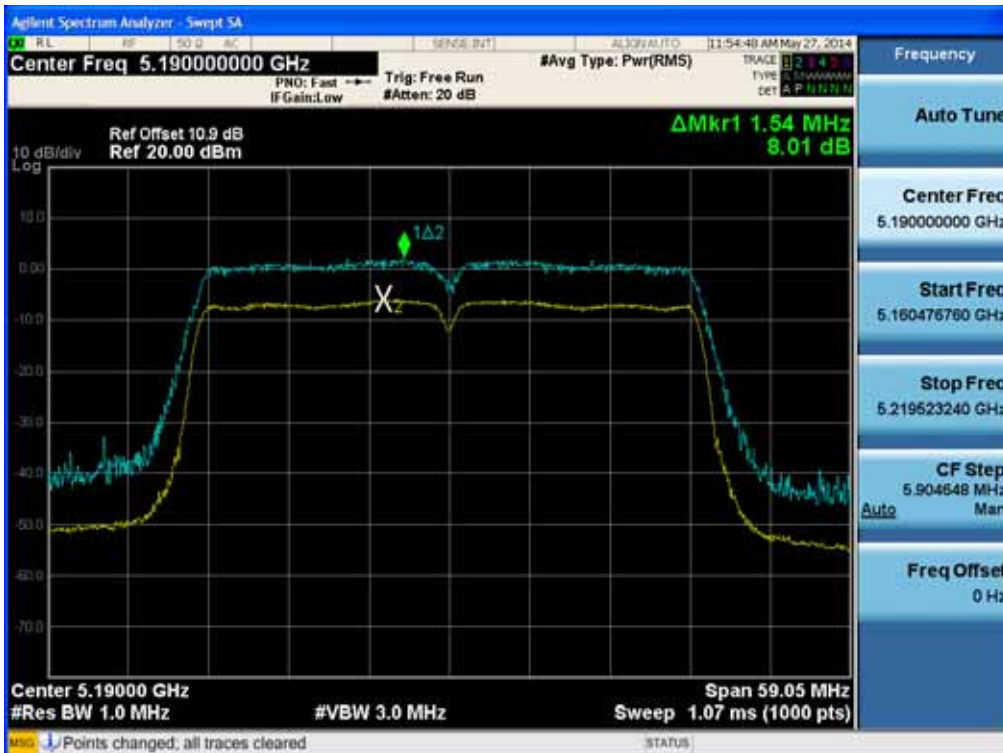


FCC PT.15.407 TEST REPORT	FCC & IC CERTIFICATION REPORT			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCT-R-1406-F027	Date of Issue: June 18, 2014	EUT Type: WLAN Access Point	FCC ID: A3LWEA4121	IC: 649E-WEA4121

### Peak Excursion Ratio (802.11ac-CH 46)

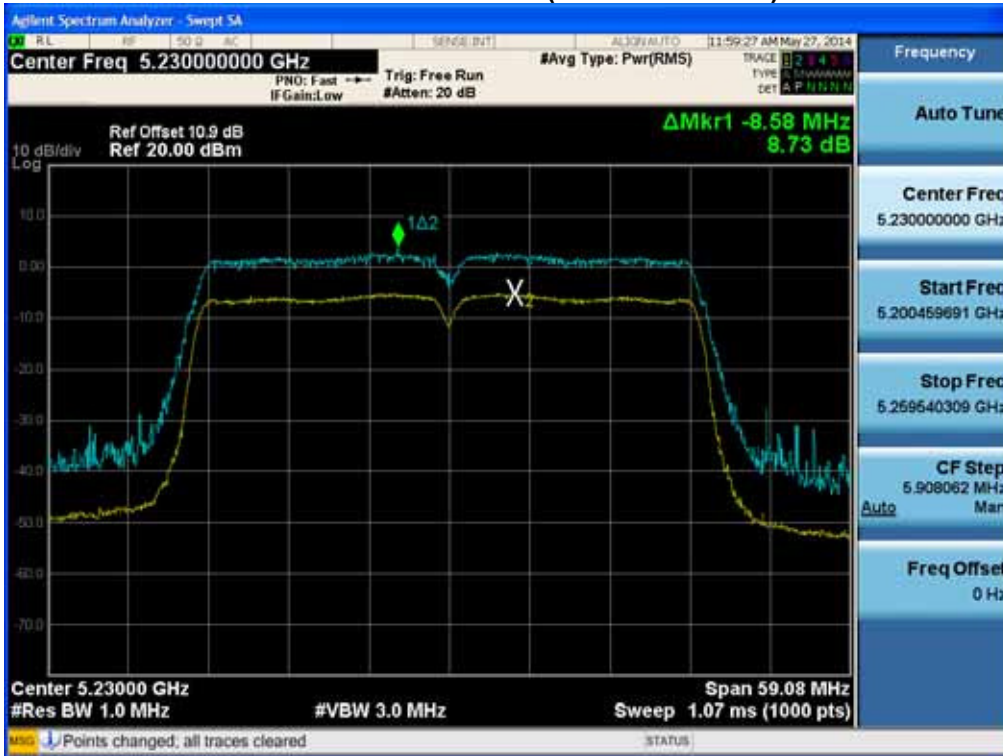

80 MHz BW

### Peak Excursion Ratio (802.11ac-CH 42)

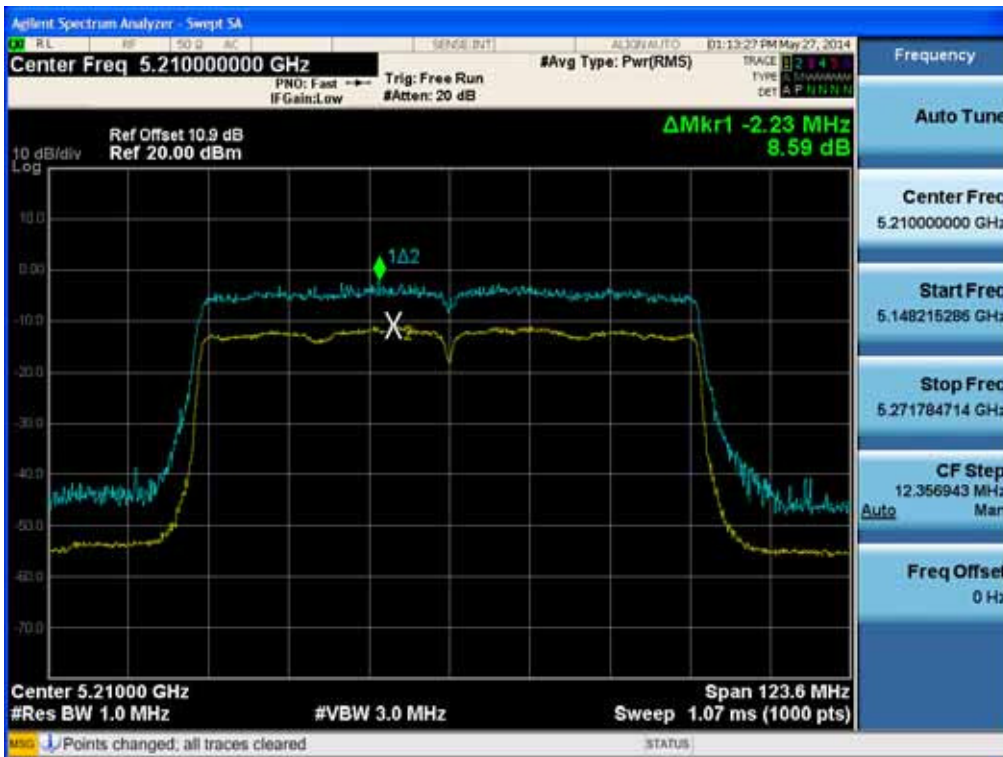

FCC PT.15.407 TEST REPORT	FCC & IC CERTIFICATION REPORT			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCT-R-1406-F027	Date of Issue: June 18, 2014	EUT Type: WLAN Access Point	FCC ID: A3LWEA412I	IC: 649E-WEA412I

Ant.1

20 MHz BW

Peak Excursion Ratio (802.11a-CH 36)



Peak Excursion Ratio (802.11a-CH 40)




FCC PT.15.407 TEST REPORT	FCC & IC CERTIFICATION REPORT			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCT-R-1406-F027	Date of Issue: June 18, 2014	EUT Type: WLAN Access Point	FCC ID: A3LWEA4121	IC: 649E-WEA4121

### Peak Excursion Ratio (802.11a-CH 48)




### Peak Excursion Ratio (802.11n-CH 36)

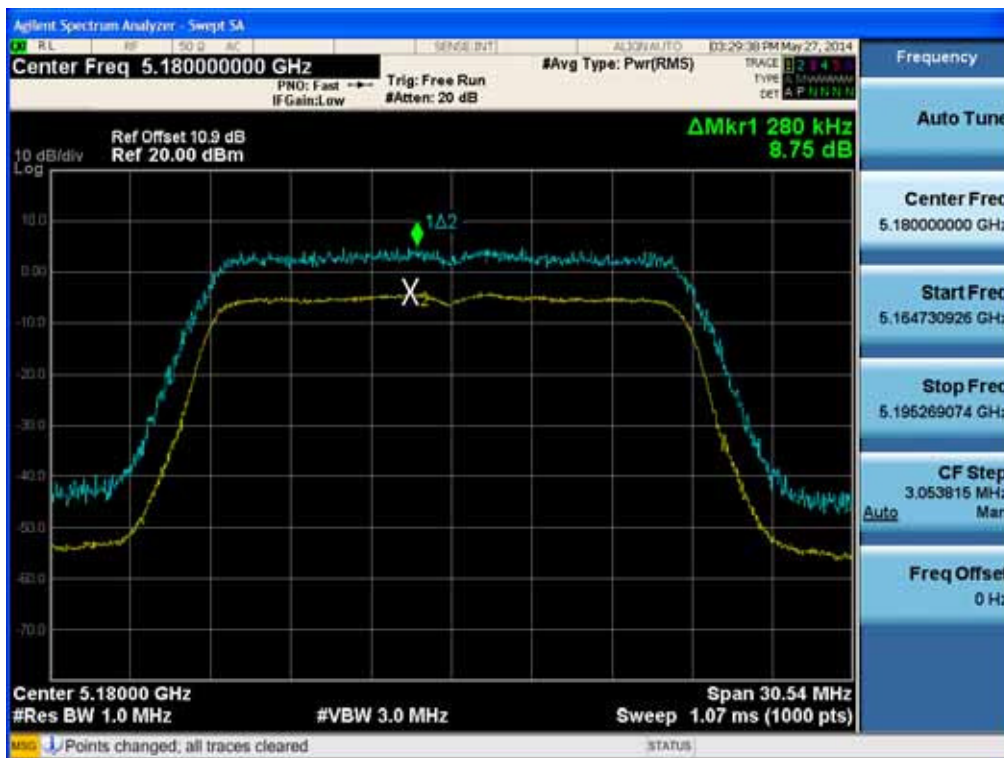


FCC PT.15.407 TEST REPORT	FCC & IC CERTIFICATION REPORT			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCT-R-1406-F027	Date of Issue: June 18, 2014	EUT Type: WLAN Access Point	FCC ID: A3LWEA4121	IC: 649E-WEA4121

### Peak Excursion Ratio (802.11n-CH 40)

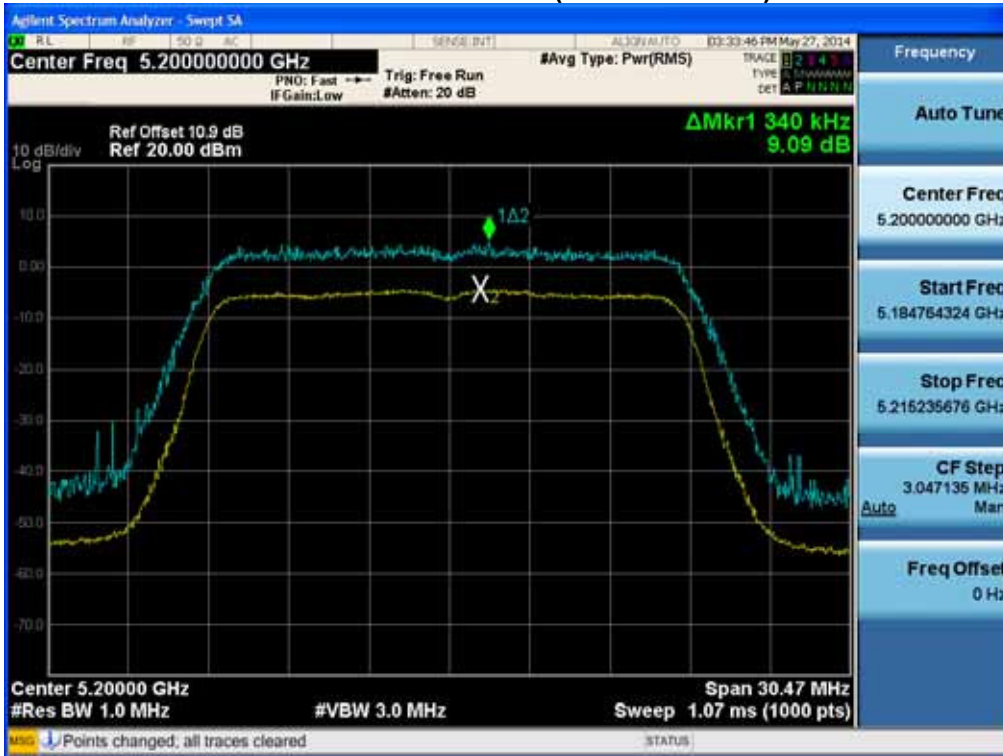

### Peak Excursion Ratio (802.11n-CH 48)

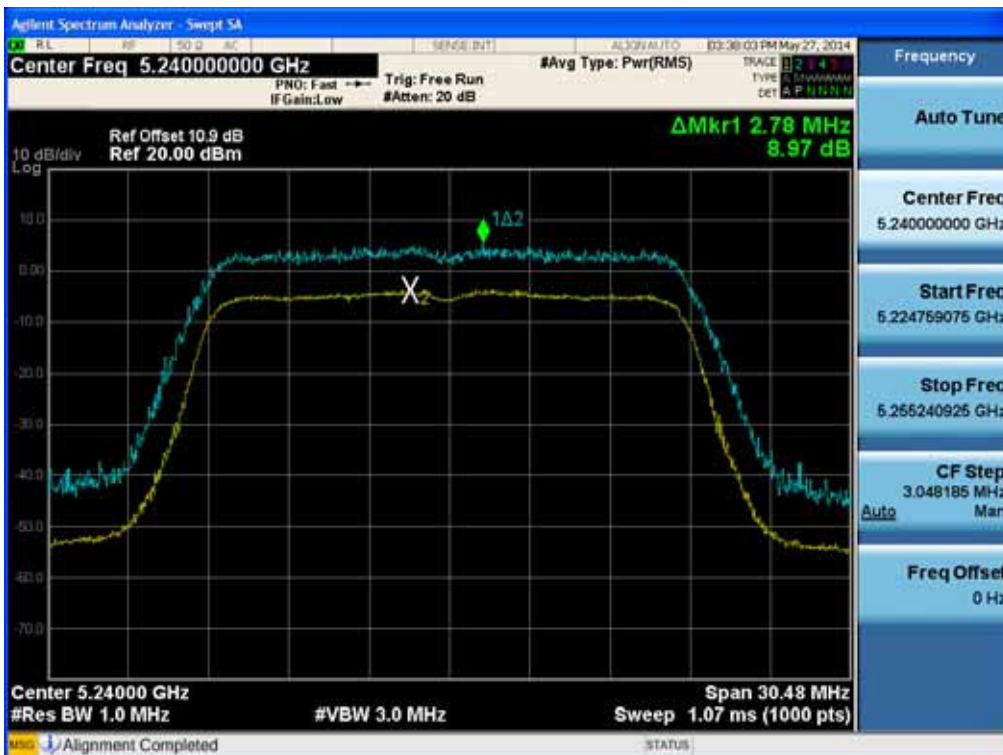

FCC PT.15.407 TEST REPORT	FCC & IC CERTIFICATION REPORT			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCT-R-1406-F027	Date of Issue: June 18, 2014	EUT Type: WLAN Access Point	FCC ID: A3LWEA412I	IC: 649E-WEA412I

### Peak Excursion Ratio (802.11ac-CH 36)




### Peak Excursion Ratio (802.11ac-CH 40)




FCC PT.15.407 TEST REPORT	FCC & IC CERTIFICATION REPORT			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCT-R-1406-F027	Date of Issue: June 18, 2014	EUT Type: WLAN Access Point	FCC ID: A3LWEA4121	IC: 649E-WEA4121

### Peak Excursion Ratio (802.11ac-CH 48)

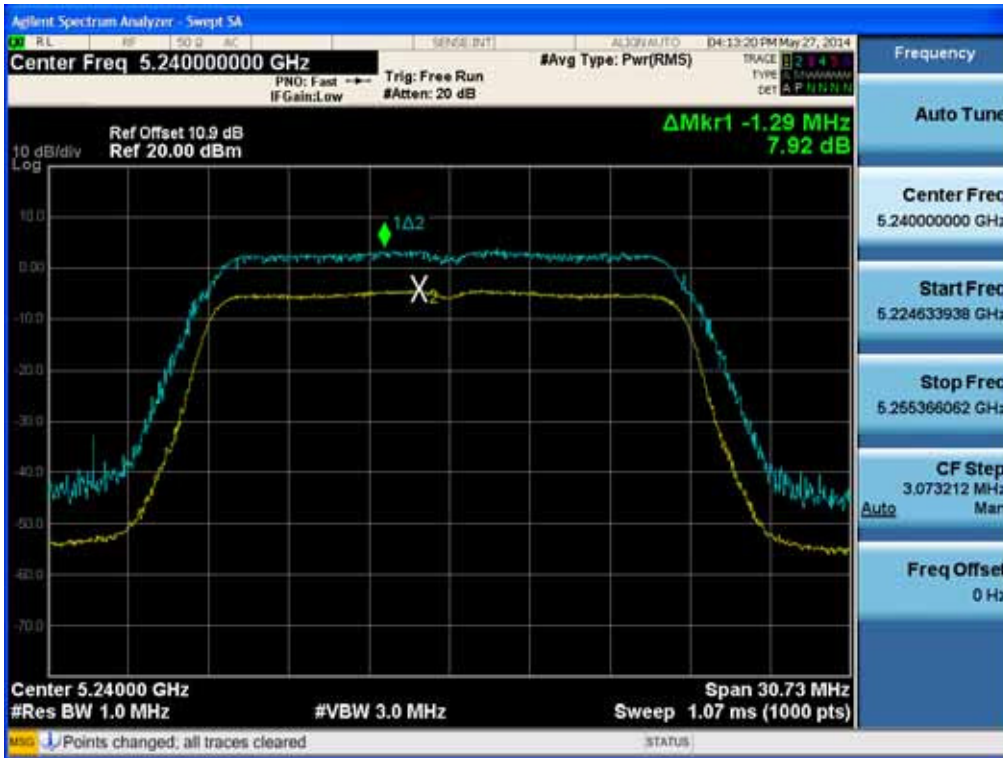


40 MHz BW

### Peak Excursion Ratio (802.11n-CH 38)

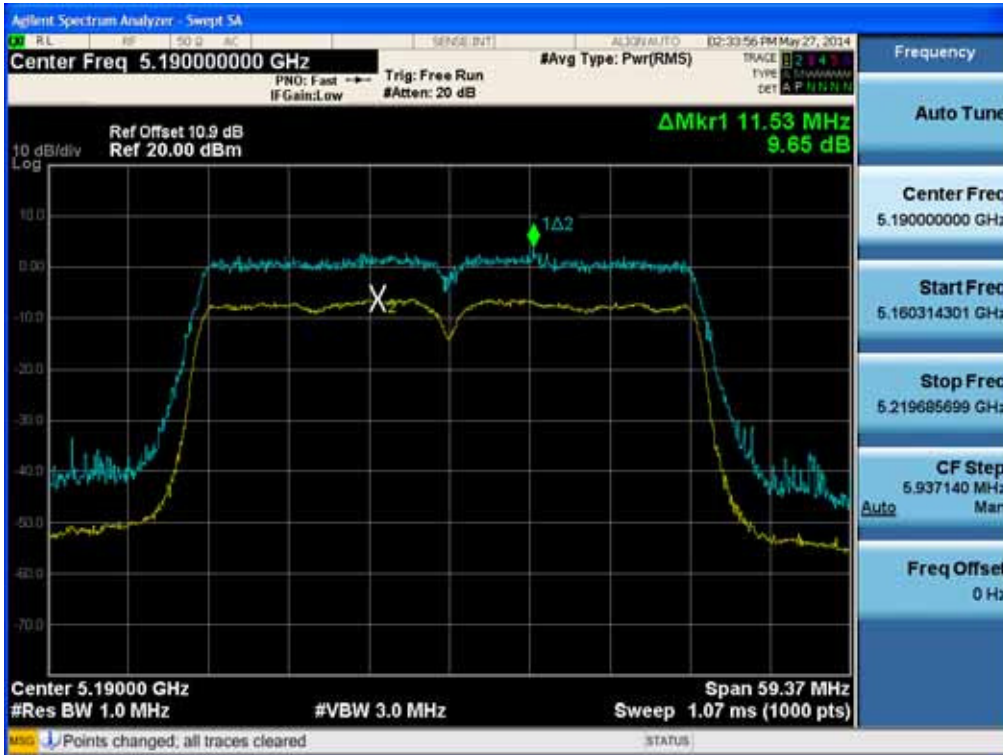


FCC PT.15.407 TEST REPORT	FCC & IC CERTIFICATION REPORT			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCT-R-1406-F027	Date of Issue: June 18, 2014	EUT Type: WLAN Access Point	FCC ID: A3LWEA4121	IC: 649E-WEA4121

### Peak Excursion Ratio (802.11n-CH 46)

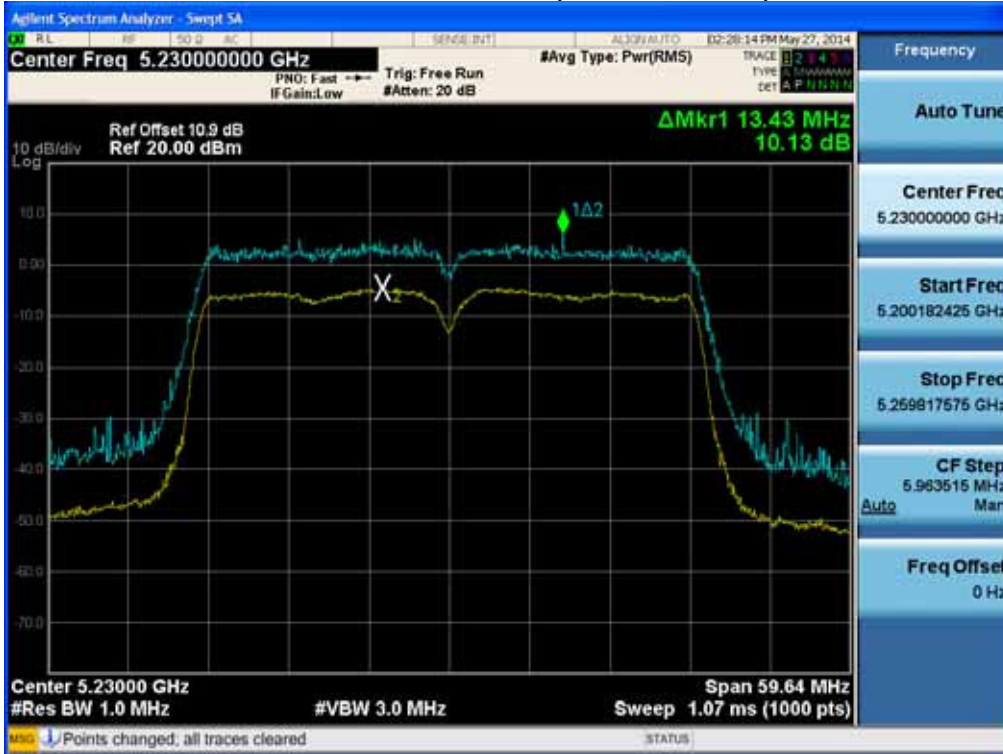


### Peak Excursion Ratio (802.11ac-CH 38)

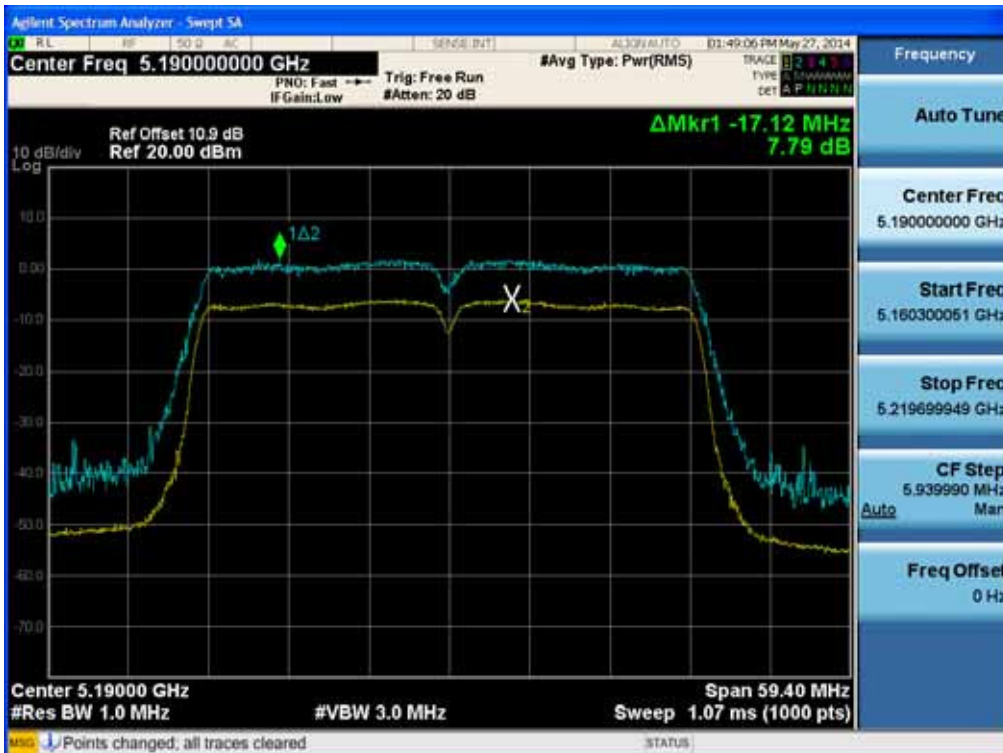


FCC PT.15.407 TEST REPORT	FCC & IC CERTIFICATION REPORT			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCT-R-1406-F027	Date of Issue: June 18, 2014	EUT Type: WLAN Access Point	FCC ID: A3LWEA412I	IC: 649E-WEA412I

### Peak Excursion Ratio (802.11ac-CH 46)

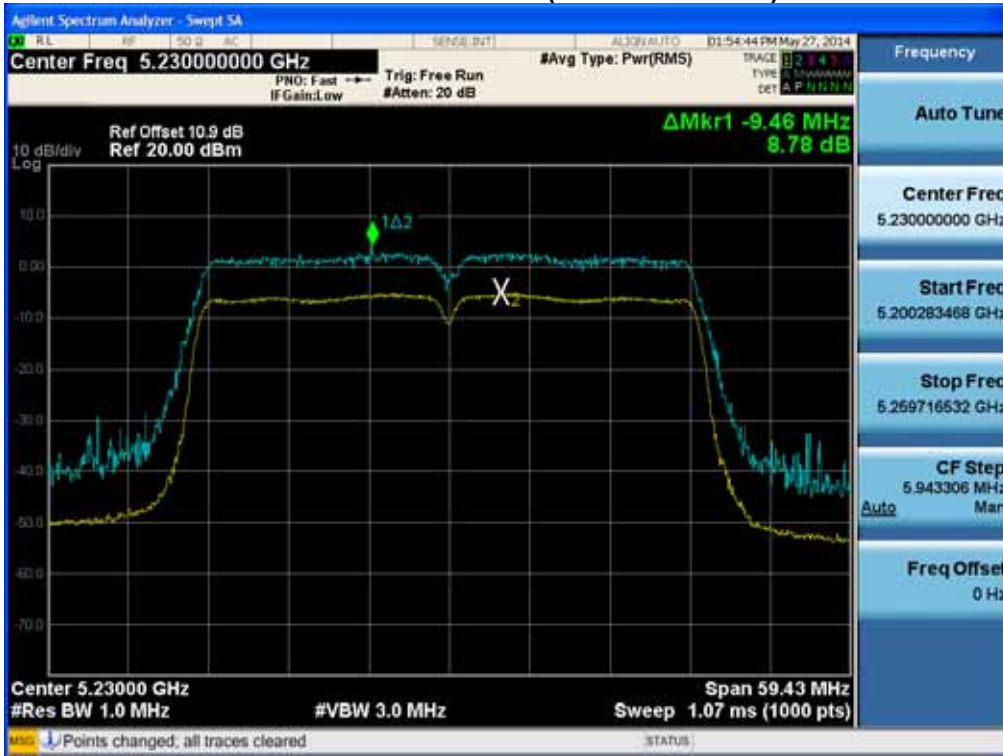

80 MHz BW

### Peak Excursion Ratio (802.11ac-CH 42)

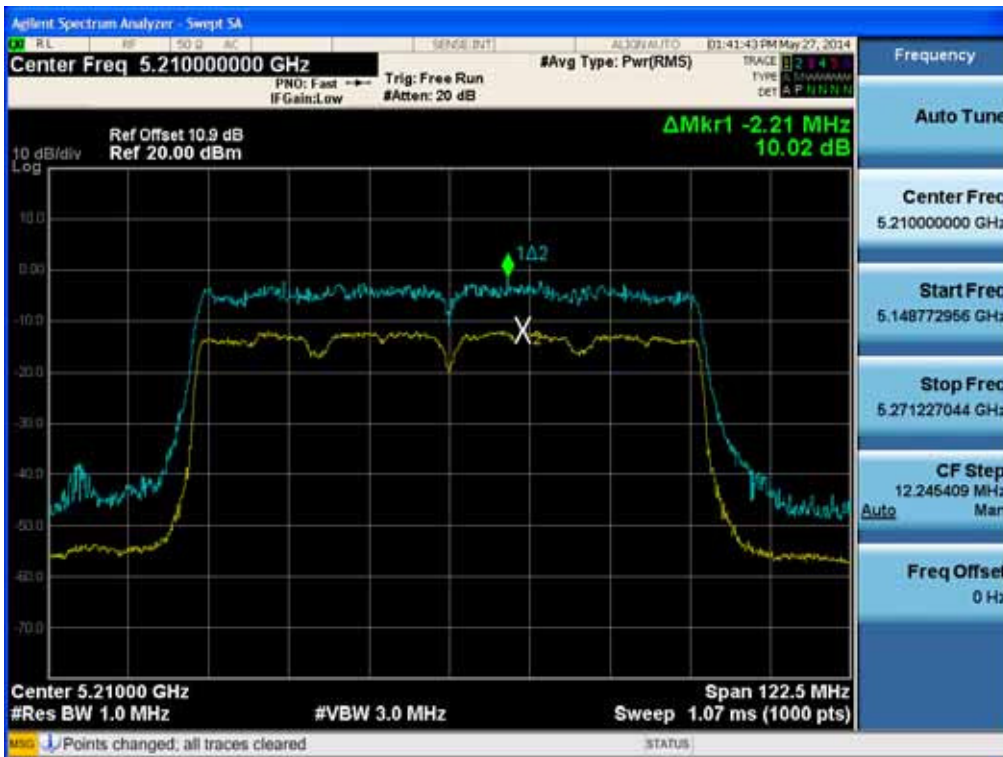

FCC PT.15.407 TEST REPORT	FCC & IC CERTIFICATION REPORT			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCT-R-1406-F027	Date of Issue: June 18, 2014	EUT Type: WLAN Access Point	FCC ID: A3LWEA412I	IC: 649E-WEA412I



## 8.7 FREQUENCY STABILITY.

The EUT was placed inside an environmental chamber as the temperature in the chamber was varied between -30 °C and 50 °C. The temperature was incremented by 10 °C intervals and the unit was allowed to stabilize at each temperature before each measurement. The center frequency of the transmitting channel was evaluated at each temperature and the frequency deviation from the channel's center frequency was recorded.

### 20 MHz BW

OPERATING BAND: UNII Band 1  
 OPERATING FREQUENCY: 5,180,000,000 Hz  
 CHANNEL: 36  
 REFERENCE VOLTAGE: 220 VAC

Voltage (%)	Power (VAC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100	220	+20(Ref)	5 179 956	44.12
100		-30	5 180 012	12.30
100		-20	5 180 027	26.79
100		-10	5 180 037	37.46
100		0	5 180 005	5.14
100		+10	5 179 962	38.11
100		+30	5 179 955	44.96
100		+40	5 179 962	38.27
100		+50	5 179 944	56.29
115		253	+20	5 179 963
85	187	+20	5 179 969	30.52

### Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC PT.15.407 TEST REPORT		FCC & IC CERTIFICATION REPORT		<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCT-R-1406-F027	Date of Issue: June 18, 2014	EUT Type: WLAN Access Point	FCC ID: A3LWEA412I	IC: 649E-WEA412I



**40 MHz BW**

OPERATING BAND: UNII Band 1  
 OPERATING FREQUENCY: 5,190,000,000 Hz  
 CHANNEL: 38  
 REFERENCE VOLTAGE: 220 VAC

Voltage (%)	Power (VAC)	Temp. (□)	Frequency (kHz)	Frequency Error (kHz)
100	220	+20(Ref)	5 179 956	44.33
100		-30	5 180 012	12.09
100		-20	5 180 027	26.88
100		-10	5 180 037	37.24
100		0	5 180 005	5.37
100		+10	5 179 962	38.19
100		+30	5 179 955	45.29
100		+40	5 179 962	38.47
100		+50	5 179 944	56.10
115		253	+20	5 179 963
85	187	+20	5 179 969	30.96

**Note:**

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

<b>FCC PT.15.407 TEST REPORT</b>		<b>FCC &amp; IC CERTIFICATION REPORT</b>		<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCT-R-1406-F027	Date of Issue: June 18, 2014	EUT Type: WLAN Access Point		FCC ID: A3LWEA412I IC: 649E-WEA412I



**80 MHz BW**

OPERATING BAND: UNII Band 1  
 OPERATING FREQUENCY: 5,210,000,000 Hz  
 CHANNEL: 42  
 REFERENCE VOLTAGE: 220 VAC

Voltage (%)	Power (VAC)	Temp. (□)	Frequency (kHz)	Frequency Error (kHz)
100	220	+20(Ref)	5 179 958	42.13
100		-30	5 180 019	19.09
100		-20	5 180 022	21.81
100		-10	5 180 023	23.24
100		0	5 180 007	6.77
100		+10	5 179 968	32.49
100		+30	5 179 957	46.99
100		+40	5 179 964	36.15
100		+50	5 179 948	52.00
115		253	+20	5 179 959
85	187	+20	5 179 962	37.86

**Note:**

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

## 8.8 RADIATED MEASUREMENT.

### 8.8.1 RADIATED SPURIOUS EMISSIONS.

Test Requirements and limit, §15.205, §15.209, §15.407

Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

#### □ §15.407, KDB 789033

All harmonics that do not lie in a restricted band are subject to a peak limit of -27 dBm/MHz. At a distance of 3 meters the field strength limit in dBµV/m can be determined by adding a “conversion” factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions of 68.2 dBµV/m.


#### □ Test case

Service	SISO	Ant 0
		Ant 1
	MIMO	Ant 0 & 1(Worst Case)


Note : We have done all test case. We attached the results of only worst case.

## Test Configuration

### Below 30 MHz

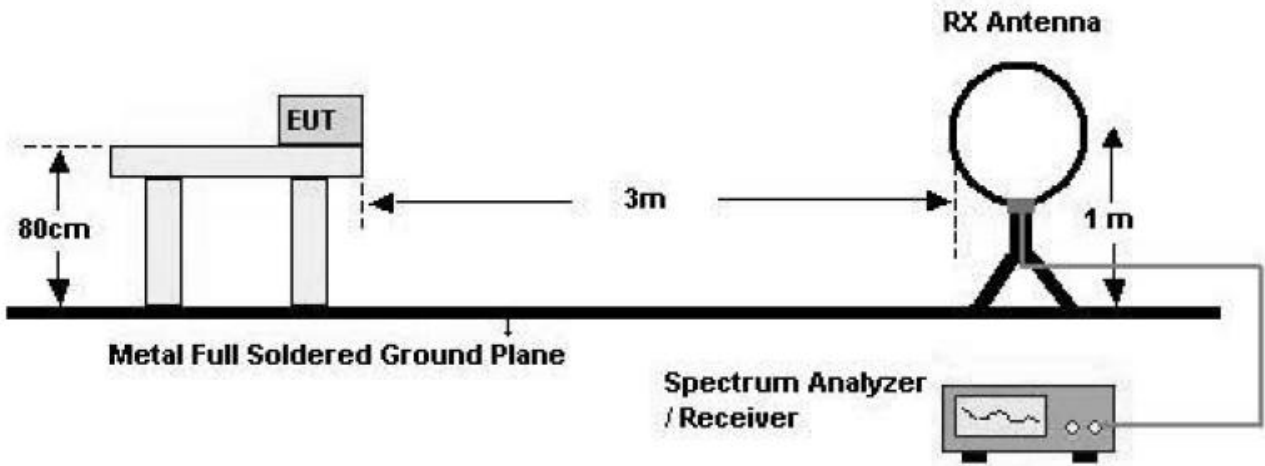


### 30 MHz - 1 GHz

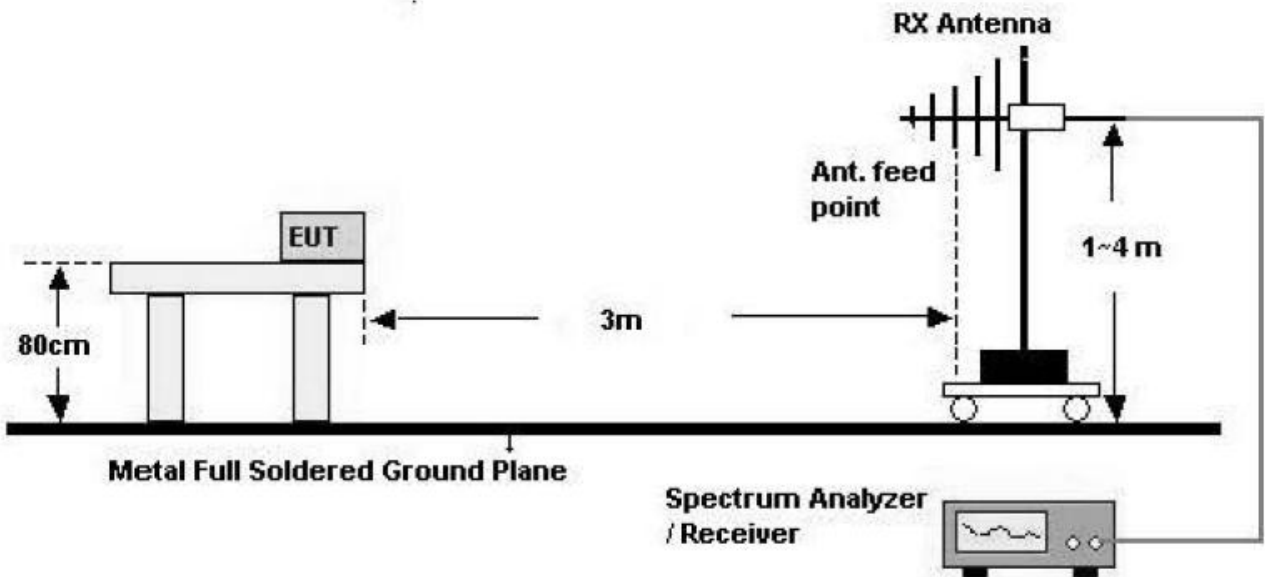

FCC PT.15.407 TEST REPORT		FCC & IC CERTIFICATION REPORT		<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCT-R-1406-F027	Date of Issue: June 18, 2014	EUT Type: WLAN Access Point	FCC ID: A3LWEA412I	IC: 649E-WEA412I

**Above 1 GHz**

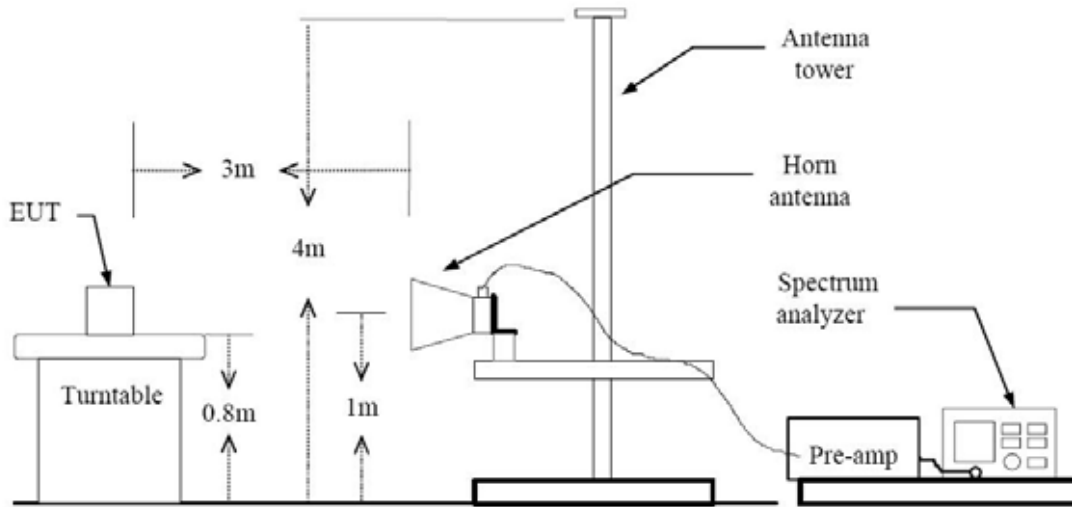

**TEST PROCEDURE USED**

ANSI C63.4(2003)

Method H)5) in KDB 789033, issued 04/08/2013 (Peak)

Method H)6)d) in KDB 789033, issued 04/08/2013 (Average)

**. Spectrum setting:**

- Peak.

1. RBW = 1 MHz
2. VBW ≥ 3 MHz
3. Detector = Peak
4. Sweep Time = auto
5. Trace mode = max hold
6. Allow sweeps to continue until the trace stabilizes.
7. Note that if the transmission is not continuous, the time required for the trace to stabilize will increase by a factor of approximately 1/x, where x is the duty cycle.

- Average ( Method VB :Averaging using reduced video bandwidth)

1. RBW = 1 MHz
2. VBW
  - 2.1. If the EUT is configured to transmit with duty cycle ≥ 98 percent, set VBW ≤ RBW/100(i.e., 10 kHz) but not less than 10 Hz.
  - 2.2. If the EUT duty cycle is < 98 percent, set VBW ≥ 1/T, where T is the minimum transmission duration.
3. The analyzer is set to linear detector mode.
4. Detector = Peak.

FCC PT.15.407 TEST REPORT		FCC & IC CERTIFICATION REPORT		<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCT-R-1406-F027	Date of Issue: June 18, 2014	EUT Type: WLAN Access Point	FCC ID: A3LWEA412I	IC: 649E-WEA412I

5. Sweep time = auto.
6. Trace mode = max hold.
7. Allow max hold to run for at least 50 traces if the transmitted signal is continuous or has at least 98 percent duty cycle. For lower duty cycles, increase the minimum number of traces by a factor of 1/x, where x is the duty cycle.

**Note :**

1. We used the case 2 for 802.11a/n\_20/n\_40/ac\_20/ac\_40/ac\_80 to perform the average field strength measurements for RSE and radiated band edge test.
2. The actual setting value of VBW for 802.11a/n\_20/n\_40/ac\_20/ac\_40/ac\_80.

Mode	Worst Data rate (Mbps)	T <sub>on</sub> (ms)	T <sub>total</sub> (ms)	Duty Cycle (%)	VBW(1/T) (Hz)	The actual setting value of VBW (Hz)
a	6	2.060	2.170	94.93	485	1000
n_20	6.5	1.920	2.015	95.29	521	1000
n_40	13.5	0.944	1.042	90.60	1059	3000
ac_20	6.5	1.920	2.015	95.29	521	1000
ac_40	13.5	0.944	1.042	90.60	1059	3000
ac_80	29.3	0.459	0.488	94.06	2179	3000



**TEST RESULTS**

**9 kHz – 30MHz**

**Operation Mode:** Normal Mode

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dB $\mu$ V	dB /m	dB	(H/V)	dB $\mu$ V/m	dB $\mu$ V/m	dB
No Critical peaks found							

**Notes:**

1. Measuring frequencies from 9 kHz to the 30MHz.
2. The reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
3. Distance extrapolation factor = 40 log (specific distance / test distance) (dB)
4. Limit line = specific Limits (dBuV) + Distance extrapolation factor
5. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

<b>FCC PT.15.407 TEST REPORT</b>		<b>FCC &amp; IC CERTIFICATION REPORT</b>			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
<b>Test Report No.</b> HCT-R-1406-F027	<b>Date of Issue:</b> June 18, 2014	<b>EUT Type:</b> WLAN Access Point		<b>FCC ID:</b> A3LWEA412I	<b>IC:</b> 649E-WEA412I



## TEST RESULTS

Below 1 GHz

Operation Mode: Normal Mode

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dB $\mu$ V	dB /m	dB	(H/V)	dB $\mu$ V/m	dB $\mu$ V/m	dB
No Critical peaks found							

### Notes:

1. Measuring frequencies from 30 MHz to the 1 GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.
3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

<b>FCC PT.15.407 TEST REPORT</b>	<b>FCC &amp; IC CERTIFICATION REPORT</b>			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
<b>Test Report No.</b> HCT-R-1406-F027	<b>Date of Issue:</b> June 18, 2014	<b>EUT Type:</b> WLAN Access Point	<b>FCC ID:</b> A3LWEA412I	<b>IC:</b> 649E-WEA412I



**Above 1 GHz**

**MIMO(Ant.0 & 1)**

Band : UNII 1  
 Operation Mode: 802.11 a  
 Transfer Rate: 6 Mbps  
 Operating Frequency 5180 MHz  
 Channel No. 36 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
10360	64.13	-6.51	V	57.62	68.20	10.58	PK
15540	62.64	-6.42	V	56.22	73.98	17.76	PK
15540	48.80	-6.42	V	42.38	53.98	11.60	AV
10360	64.41	-6.51	H	57.90	68.20	10.30	PK
15540	62.94	-6.42	H	56.52	73.98	17.46	PK
15540	48.94	-6.42	H	42.52	53.98	11.46	AV

Band : UNII 1  
 Operation Mode: 802.11 a  
 Transfer Rate: 6 Mbps  
 Operating Frequency 5200 MHz  
 Channel No. 40 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
10400	65.01	-6.49	V	58.52	68.20	9.68	PK
15600	62.38	-7.15	V	55.23	73.98	18.75	PK
15600	48.74	-7.15	V	41.59	53.98	12.39	AV
10400	65.22	-6.49	H	58.73	68.20	9.47	PK
15600	62.73	-7.15	H	55.58	73.98	18.40	PK
15600	48.81	-7.15	H	41.66	53.98	12.32	AV



Band :	UNII 1
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5240 MHz
Channel No.	48 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
10480	69.99	-6.96	V	63.03	68.20	5.17	PK
15720	62.38	-6.62	V	55.76	73.98	18.22	PK
15720	48.66	-6.62	V	42.04	53.98	11.94	AV
10480	70.49	-6.96	H	63.53	68.20	4.67	PK
15720	62.50	-6.96	H	55.54	73.98	18.44	PK
15720	48.83	-6.62	H	42.21	53.98	11.77	AV

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11a mode test. . Worst case of EUT is lowest data rate in 802.11a.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.407 TEST REPORT		FCC & IC CERTIFICATION REPORT			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCT-R-1406-F027	Date of Issue: June 18, 2014	EUT Type: WLAN Access Point		FCC ID: A3LWEA412I	IC: 649E-WEA412I



Band : UNII 1  
 Operation Mode: 802.11 n\_20 MHz BW  
 Transfer Rate: 6.5 Mbps  
 Operating Frequency 5180 MHz  
 Channel No. 36 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
10360	64.03	-6.51	V	57.52	68.20	10.68	PK
15540	62.48	-6.42	V	56.06	73.98	17.92	PK
15540	48.81	-6.42	V	42.39	53.98	11.59	AV
10360	64.12	-6.51	H	57.61	68.20	10.59	PK
15540	62.64	-6.42	H	56.22	73.98	17.76	PK
15540	48.86	-6.42	H	42.44	53.98	11.54	AV

Band : UNII 1  
 Operation Mode: 802.11 n\_20 MHz BW  
 Transfer Rate: 6.5 Mbps  
 Operating Frequency 5200 MHz  
 Channel No. 40 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
10400	65.55	-6.49	V	59.06	68.20	9.14	PK
15600	62.55	-7.15	V	55.40	73.98	18.58	PK
15600	48.83	-7.15	V	41.68	53.98	12.30	AV
10400	65.86	-6.49	H	59.37	68.20	8.83	PK
15600	62.94	-7.15	H	55.79	73.98	18.19	PK
15600	48.97	-7.15	H	41.82	53.98	12.16	AV



Band :	UNII 1
Operation Mode:	802.11 n_20 MHz BW
Transfer Rate:	6.5 Mbps
Operating Frequency	5240 MHz
Channel No.	48 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
10480	70.59	-6.96	V	63.63	68.20	4.57	PK
15720	62.81	-6.62	V	56.19	73.98	17.79	PK
15720	48.46	-6.62	V	41.84	53.98	12.14	AV
10480	70.69	-6.96	H	63.73	68.20	4.47	PK
15720	62.98	-6.96	H	56.02	73.98	17.96	PK
15720	48.52	-6.62	H	41.90	53.98	12.08	AV

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11n\_20 MHz BW mode test. . Worst case of EUT is lowest data rate in 802.11n\_20 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.407 TEST REPORT		FCC & IC CERTIFICATION REPORT			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCT-R-1406-F027	Date of Issue: June 18, 2014	EUT Type: WLAN Access Point		FCC ID: A3LWEA412I	IC: 649E-WEA412I



Band : UNII 1  
 Operation Mode: 802.11 ac\_20 MHz BW  
 Transfer Rate: 6.5 Mbps  
 Operating Frequency 5180 MHz  
 Channel No. 36 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10360	63.34	-6.51	V	56.83	68.20	11.37	PK
15540	62.50	-6.42	V	56.08	73.98	17.90	PK
15540	48.86	-6.42	V	42.44	53.98	11.54	AV
10360	63.64	-6.51	H	57.13	68.20	11.07	PK
15540	62.80	-6.42	H	56.38	73.98	17.60	PK
15540	48.89	-6.42	H	42.47	53.98	11.51	AV

Band : UNII 1  
 Operation Mode: 802.11 ac\_20 MHz BW  
 Transfer Rate: 6.5 Mbps  
 Operating Frequency 5200 MHz  
 Channel No. 40 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10400	65.81	-6.49	V	59.32	68.20	8.88	PK
15600	62.63	-7.15	V	55.48	73.98	18.50	PK
15600	48.70	-7.15	V	41.55	53.98	12.43	AV
10400	66.22	-6.49	H	59.73	68.20	8.47	PK
15600	62.71	-7.15	H	55.56	73.98	18.42	PK
15600	48.82	-7.15	H	41.67	53.98	12.31	AV



Band :	UNII 1
Operation Mode:	802.11 ac_20 MHz BW
Transfer Rate:	6.5 Mbps
Operating Frequency	5240 MHz
Channel No.	48 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10480	71.48	-6.96	V	64.52	68.20	3.68	PK
15720	62.82	-6.62	V	56.20	73.98	17.78	PK
15720	48.62	-6.62	V	42.00	53.98	11.98	AV
10480	71.87	-6.96	H	64.91	68.20	3.29	PK
15720	63.45	-6.96	H	56.49	73.98	17.49	PK
15720	48.65	-6.62	H	42.03	53.98	11.95	AV

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac\_20 MHz BW mode test. . Worst case of EUT is lowest data rate in 802.11ac\_20 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.407 TEST REPORT		FCC & IC CERTIFICATION REPORT			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCT-R-1406-F027	Date of Issue: June 18, 2014	EUT Type: WLAN Access Point	FCC ID: A3LWEA412I	IC: 649E-WEA412I	



Band : UNII 1  
 Operation Mode: 802.11n\_40 MHz BW  
 Transfer Rate: 13.5 Mbps  
 Operating Frequency 5190 MHz  
 Channel No. 38 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10380	63.71	-5.38	V	58.33	68.20	9.87	PK
15570	62.52	-6.41	V	56.11	73.98	17.87	PK
15570	48.87	-6.41	V	42.46	53.98	11.52	AV
10380	63.83	-5.38	H	58.45	68.20	9.75	PK
15570	62.70	-6.41	H	56.29	73.98	17.69	PK
15570	48.96	-6.41	H	42.55	53.98	11.43	AV

Band : UNII 1  
 Operation Mode: 802.11n\_40 MHz BW  
 Transfer Rate: 13.5 Mbps  
 Operating Frequency 5230 MHz  
 Channel No. 46 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10460	67.36	-6.88	V	60.48	68.20	7.72	PK
15690	62.89	-6.64	V	56.25	73.98	17.73	PK
15690	48.91	-6.64	V	42.27	53.98	11.71	AV
10460	67.65	-6.88	H	60.77	68.20	7.43	PK
15690	63.36	-6.64	H	56.72	73.98	17.26	PK
15690	48.98	-6.64	H	42.34	53.98	11.64	AV

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.

FCC PT.15.407 TEST REPORT		FCC & IC CERTIFICATION REPORT			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCT-R-1406-F027	Date of Issue: June 18, 2014	EUT Type: WLAN Access Point		FCC ID: A3LWEA412I	IC: 649E-WEA412I



- 4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
- 5. We have done all data rate in 802.11n\_40 MHz BW. Worst case of EUT is lowest data rate in 802.11n\_40 MHz BW.
- 6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

<b>FCC PT.15.407 TEST REPORT</b>		<b>FCC &amp; IC CERTIFICATION REPORT</b>		<a href="http://www.hct.co.kr">www.hct.co.kr</a>
<b>Test Report No.</b> HCT-R-1406-F027	<b>Date of Issue:</b> June 18, 2014	<b>EUT Type:</b> WLAN Access Point	<b>FCC ID:</b> A3LWEA412I	<b>IC:</b> 649E-WEA412I



Band : UNII 1  
 Operation Mode: 802.11ac\_40 MHz BW  
 Transfer Rate: 13.5 Mbps  
 Operating Frequency 5190 MHz  
 Channel No. 38 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10380	63.38	-5.38	V	58.00	68.20	10.20	PK
15570	62.89	-6.41	V	56.48	73.98	17.50	PK
15570	48.90	-6.41	V	42.49	53.98	11.49	AV
10380	63.59	-5.38	H	58.21	68.20	9.99	PK
15570	63.77	-6.41	H	57.36	73.98	16.62	PK
15570	48.99	-6.41	H	42.58	53.98	11.40	AV

Band : UNII 1  
 Operation Mode: 802.11ac\_40 MHz BW  
 Transfer Rate: 13.5 Mbps  
 Operating Frequency 5230 MHz  
 Channel No. 46 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10460	66.94	-6.88	V	60.06	68.20	8.14	PK
15690	62.74	-6.64	V	56.10	73.98	17.88	PK
15690	48.89	-6.64	V	42.25	53.98	11.73	AV
10460	67.34	-6.88	H	60.46	68.20	7.74	PK
15690	62.92	-6.64	H	56.28	73.98	17.70	PK
15690	49.01	-6.64	H	42.37	53.98	11.61	AV

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.

FCC PT.15.407 TEST REPORT		FCC & IC CERTIFICATION REPORT			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCT-R-1406-F027	Date of Issue: June 18, 2014	EUT Type: WLAN Access Point		FCC ID: A3LWEA412I	IC: 649E-WEA412I



- 4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
- 5. We have done all data rate in 802.11ac\_40 MHz BW. Worst case of EUT is lowest data rate in 802.11ac\_40 MHz BW.
- 6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna

<b>FCC PT.15.407 TEST REPORT</b>		<b>FCC &amp; IC CERTIFICATION REPORT</b>		<a href="http://www.hct.co.kr">www.hct.co.kr</a>
<b>Test Report No.</b> HCT-R-1406-F027	<b>Date of Issue:</b> June 18, 2014	<b>EUT Type:</b> WLAN Access Point	<b>FCC ID:</b> A3LWEA412I	<b>IC:</b> 649E-WEA412I



Band :	UNII 1
Operation Mode:	802.11ac_80 MHz BW
Transfer Rate:	29.3 Mbps
Operating Frequency	5210 MHz
Channel No.	42 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10420	62.84	-6.32	V	56.52	68.20	11.68	PK
15630	62.96	-7.14	V	55.82	73.98	18.16	PK
15630	49.07	-7.14	V	41.93	53.98	12.05	AV
10420	63.69	-6.32	H	57.37	68.20	10.83	PK
15630	63.39	-7.14	H	56.25	73.98	17.73	PK
15630	49.11	-7.14	H	41.97	53.98	12.01	AV

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac\_80 MHz BW. Worst case of EUT is lowest data rate in 802.11ac\_80 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.407 TEST REPORT		FCC & IC CERTIFICATION REPORT			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCT-R-1406-F027	Date of Issue: June 18, 2014	EUT Type: WLAN Access Point	FCC ID: A3LWEA412I	IC: 649E-WEA412I	

## 8.8.2 RADIATED RESTRICTED BAND EDGE MEASUREMENTS

### Test Requirements and limit, §15.407, §15.205, §15.209

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in section 15.209(a) (See section 15.205(c)).

### MIMO(Ant.0 & 1)

Band :	UNII 1
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5180 MHz
Channel No.	36 Ch

Frequency [MHz]	Reading dBuV	AN.+CL+AMP+ATT. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
5150	54.17	8.79	H	62.96	73.98	11.02	PK
5150	41.71	8.79	H	50.50	53.98	3.48	AV
5150	54.02	8.79	V	62.81	73.98	11.17	PK
5150	41.66	8.79	V	50.45	53.98	3.53	AV



Band : UNII 1  
 Operation Mode: 802.11 n\_20 MHz BW  
 Transfer Rate: 6.5 Mbps  
 Operating Frequency 5180 MHz  
 Channel No. 36 Ch

Frequency [MHz]	Reading dBuV	AN.+CL+AMP+ATT. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
5150	54.07	8.79	H	62.86	73.98	11.12	PK
5150	41.85	8.79	H	50.64	53.98	3.34	AV
5150	54.04	8.79	V	62.83	73.98	11.15	PK
5150	41.87	8.79	V	50.66	53.98	3.32	AV

Band : UNII 1  
 Operation Mode: 802.11 ac\_20 MHz BW  
 Transfer Rate: 6.5 Mbps  
 Operating Frequency 5180 MHz  
 Channel No. 36 Ch

Frequency [MHz]	Reading dBuV	AN.+CL+AMP+ATT. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5150	53.82	8.79	H	62.61	73.98	11.37	PK
5150	41.90	8.79	H	50.69	53.98	3.29	AV
5150	53.71	8.79	V	62.50	73.98	11.48	PK
5150	41.66	8.79	V	50.45	53.98	3.53	AV



Band : UNII 1  
 Operation Mode: 802.11n\_40 MHz BW  
 Transfer Rate: 13.5 Mbps  
 Operating Frequency 5190 MHz  
 Channel No. 38 Ch

Frequency [MHz]	Reading dBuV	AN.+CL+AMP+ATT. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
5150	60.21	8.79	H	69.00	73.98	4.98	PK
5150	42.06	8.79	H	50.85	53.98	3.13	AV
5150	60.06	8.79	V	68.85	73.98	5.13	PK
5150	41.95	8.79	V	50.74	53.98	3.24	AV

Band : UNII 1  
 Operation Mode: 802.11 ac\_40 MHz BW  
 Transfer Rate: 13.5 Mbps  
 Operating Frequency 5190 MHz  
 Channel No. 38 Ch

Frequency [MHz]	Reading dBuV	AN.+CL+AMP+ATT. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5150	61.69	8.79	H	70.48	73.98	3.50	PK
5150	41.92	8.79	H	50.71	53.98	3.27	AV
5150	61.45	8.79	V	70.24	73.98	3.74	PK
5150	41.85	8.79	V	50.64	53.98	3.34	AV



Band : UNII 1  
 Operation Mode: 802.11 ac\_80 MHz BW  
 Transfer Rate: 29.3 Mbps  
 Operating Frequency 5210 MHz  
 Channel No. 42 Ch

Frequency [MHz]	Reading dBuV	AN.+CL+AMP+ATT. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5150	58.42	8.79	H	67.21	73.98	6.77	PK
5150	41.84	8.79	H	50.63	53.98	3.35	AV
5150	58.19	8.79	V	66.98	73.98	7.00	PK
5150	41.79	8.79	V	50.58	53.98	3.40	AV

**Notes:**

1. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain + ATT
2. We have done all data rate in 802.11a/n/ac mode test. . Worst case of EUT is lowest data rate in 802.11a/n/ac
3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.407 TEST REPORT		FCC & IC CERTIFICATION REPORT			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCT-R-1406-F027	Date of Issue: June 18, 2014	EUT Type: WLAN Access Point		FCC ID: A3LWEA412I	IC: 649E-WEA412I

### 8.8.3 RECEIVER SPURIOUS EMISSIONS

**IC Rule(s)** RSS-GEN  
**Test Requirements:** Blow the table  
**Operating conditions:** Under normal test conditions  
**Method of testing:** Radiated  
  
**S/A. Settings:** F < 1 GHz: RBW: 120 kHz, VBW: 300 kHz (Quasi Peak)  
 F > 1 GHz: RBW: 1 MHz, VBW: 1 MHz (Peak)  
**Mode of operation:** Receive

Frequency (MHz)	Field Strength (microvolts/m at 3 meters)
30 – 88	100
88 - 216	150
216 – 960	200
Above 960	500

**Operation Mode: Receive:**

30 MHz ~ 1 GHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dB $\mu$ V	dB /m	dB	(H/V)	dB $\mu$ V/m	dB $\mu$ V/m	dB
No Critical peaks found							

Above 1 GHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dB $\mu$ V	dB /m	dB	(H/V)	dB $\mu$ V/m	dB $\mu$ V/m	dB
No Critical peaks found							

## 8.9 POWERLINE CONDUCTED EMISSIONS

### Test Requirements and limit, §15.207

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Frequency Range (MHz)	Limits (dB $\mu$ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

### Test Configuration

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

### TEST PROCEDURE

1. The EUT is placed on a wooden table 80 cm above the reference groundplane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors – Quasi Peak and Average Detector.
5. We are attached the AC Power Line Conducted Emission test in WLAN UNII2A/2C Report.

RESULT PLOTS


Conducted Emissions (Line 1)

# HCT TEST Report

## Common Information

EUT: WEA412I  
 Manufacturer: SAMSUNG  
 Test Site: SHIELD ROOM  
 Operating Conditions: WLAN MODE(UNII)  
 Operator Name: JS LEE

FCC CLASS B

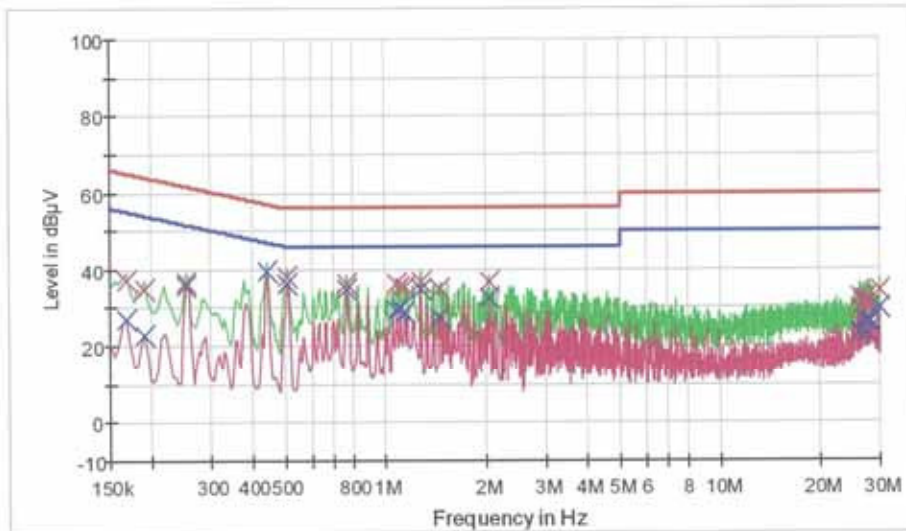

— FCCCLASS B\_OP      — FCCCLASS B\_AV      — Preview Result 1-FK  
— Preview Result 2-AVG      x Final Result 1-OPK      x Final Result 2-CAV

## Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.168000	37.0	9.000	Off	L1	9.7	28.1	65.1
0.190500	34.8	9.000	Off	L1	9.7	29.2	64.0
0.253500	36.6	9.000	Off	L1	9.7	25.0	61.6
0.442500	39.4	9.000	Off	L1	9.7	17.6	57.0
0.509000	37.9	9.000	Off	L1	9.7	18.1	56.0
0.765500	36.2	9.000	Off	L1	9.7	19.8	56.0
1.076000	36.1	9.000	Off	L1	9.7	19.9	56.0
1.107500	35.4	9.000	Off	L1	9.8	20.6	56.0
1.139000	35.3	9.000	Off	L1	9.8	20.7	56.0
1.274000	36.8	9.000	Off	L1	9.8	19.2	56.0
1.454000	34.6	9.000	Off	L1	9.8	21.4	56.0
2.043500	36.7	9.000	Off	L1	9.9	19.3	56.0
26.222000	29.6	9.000	Off	L1	11.2	30.4	60.0
26.312000	32.7	9.000	Off	L1	11.2	27.3	60.0
26.982500	32.2	9.000	Off	L1	11.3	27.8	60.0
27.855500	29.6	9.000	Off	L1	11.3	30.4	60.0

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
28.031000	31.5	9.000	Off	L1	11.3	28.5	60.0
30.000000	34.3	9.000	Off	L1	11.4	25.7	60.0

**Final Result 2**


Frequency (MHz)	CAverage (dBµV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.168000	26.8	9.000	Off	L1	9.7	28.3	55.1
0.190500	22.8	9.000	Off	L1	9.7	31.2	54.0
0.253500	35.7	9.000	Off	L1	9.7	15.9	51.6
0.442500	39.4	9.000	Off	L1	9.7	7.6	47.0
0.509000	36.4	9.000	Off	L1	9.7	9.6	46.0
0.765500	34.9	9.000	Off	L1	9.7	11.1	46.0
1.076000	29.4	9.000	Off	L1	9.7	16.6	46.0
1.107500	29.9	9.000	Off	L1	9.8	16.1	46.0
1.139000	28.8	9.000	Off	L1	9.8	17.2	46.0
1.278500	34.7	9.000	Off	L1	9.8	11.3	46.0
1.454000	27.5	9.000	Off	L1	9.8	18.5	46.0
2.043500	32.7	9.000	Off	L1	9.9	13.3	46.0
26.222000	23.4	9.000	Off	L1	11.2	26.6	50.0
26.982500	26.5	9.000	Off	L1	11.3	23.5	50.0
27.261500	23.1	9.000	Off	L1	11.3	26.9	50.0
27.954500	26.6	9.000	Off	L1	11.3	23.4	50.0
28.031000	26.2	9.000	Off	L1	11.3	23.8	50.0
30.000000	29.9	9.000	Off	L1	11.4	20.1	50.0

# HCT TEST Report

## Common Information

EUT: WEA412I  
 Manufacturer: SAMSUNG  
 Test Site: SHIELD ROOM  
 Operating Conditions: WLAN MODE(UNII)  
 Operator Name: JS LEE

FCC CLASS B

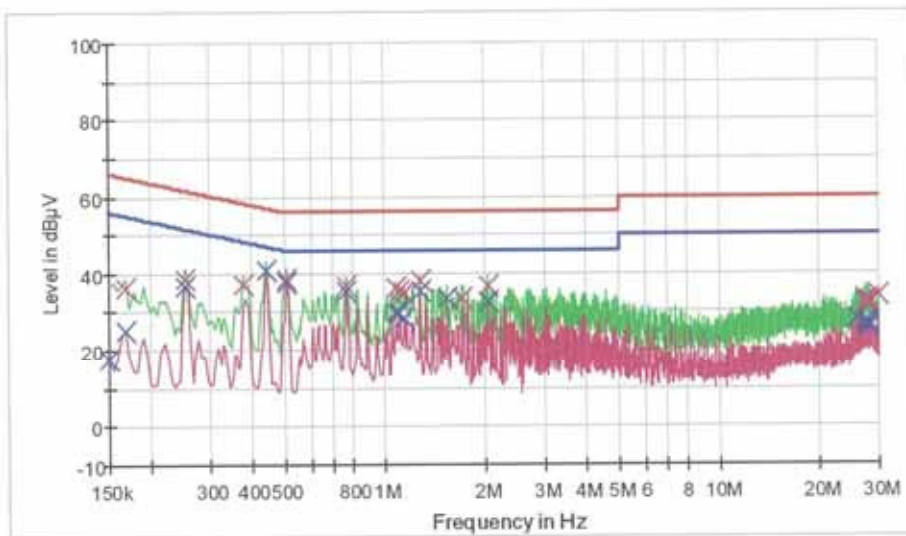

— FCCCLASS B\_OP      — FCCCLASS B\_AV      — Preview Result 1-PK  
— Preview Result 2-AVG      x Final Result 1-CPK      x Final Result 2-CAV

## Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.168000	36.0	9.000	Off	N	9.7	29.1	65.1
0.253500	38.5	9.000	Off	N	9.7	23.1	61.6
0.379500	37.2	9.000	Off	N	9.7	21.1	58.3
0.442500	41.0	9.000	Off	N	9.7	16.0	57.0
0.509000	38.8	9.000	Off	N	9.7	17.2	56.0
0.765500	36.7	9.000	Off	N	9.7	19.3	56.0
1.076000	36.1	9.000	Off	N	9.8	19.9	56.0
1.107500	35.4	9.000	Off	N	9.8	20.6	56.0
1.139000	34.9	9.000	Off	N	9.8	21.1	56.0
1.274000	37.9	9.000	Off	N	9.8	18.1	56.0
1.706000	33.2	9.000	Off	N	9.8	22.8	56.0
2.043500	36.7	9.000	Off	N	9.9	19.3	56.0
27.504500	32.7	9.000	Off	N	11.1	27.3	60.0
27.581000	31.7	9.000	Off	N	11.1	28.3	60.0
27.878000	31.3	9.000	Off	N	11.1	28.7	60.0
27.950000	32.3	9.000	Off	N	11.1	27.7	60.0

5/23/2014

11:21:52

FCC PT.15.407 TEST REPORT	FCC & IC CERTIFICATION REPORT			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCT-R-1406-F027	Date of Issue: June 18, 2014	EUT Type: WLAN Access Point	FCC ID: A3LWEA412I	IC: 649E-WEA412I

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
28.026500	32.2	9.000	Off	N	11.1	27.8	60.0
30.000000	34.0	9.000	Off	N	11.2	26.0	60.0

**Final Result 2**

Frequency (MHz)	CAverage (dBµV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	17.8	9.000	Off	N	9.7	38.2	56.0
0.168000	25.2	9.000	Off	N	9.7	29.9	55.1
0.253500	36.6	9.000	Off	N	9.7	15.0	51.6
0.442500	41.0	9.000	Off	N	9.7	6.0	47.0
0.509000	37.4	9.000	Off	N	9.7	8.6	46.0
0.765500	35.4	9.000	Off	N	9.7	10.6	46.0
1.076000	29.6	9.000	Off	N	9.8	16.4	46.0
1.107500	29.9	9.000	Off	N	9.8	16.2	46.0
1.139000	28.5	9.000	Off	N	9.8	17.5	46.0
1.278500	35.4	9.000	Off	N	9.8	10.6	46.0
1.530500	33.2	9.000	Off	N	9.8	12.8	46.0
2.043500	32.7	9.000	Off	N	9.9	13.3	46.0
25.790000	27.8	9.000	Off	N	11.0	22.2	50.0
27.500000	26.8	9.000	Off	N	11.1	23.2	50.0
27.581000	25.9	9.000	Off	N	11.1	24.1	50.0
27.878000	25.7	9.000	Off	N	11.1	24.3	50.0
27.950000	26.8	9.000	Off	N	11.1	23.2	50.0
28.026500	27.0	9.000	Off	N	11.1	23.0	50.0

## 9. LIST OF TEST EQUIPMENT

### 9.1 LIST OF TEST EQUIPMENT(Conducted Test)

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Calibration Due	Serial No.
Rohde & Schwarz	ENV216/ LISN	01/29/2014	Annual	01/29/2015	100073
Rohde & Schwarz	FSV40/Spectrum Analyzer	06/09/2014	Annual	06/09/2015	1307.9002K40-100931-NK
Agilent	E4440A/ Spectrum Analyzer	04/09/2014	Annual	04/09/2015	US45303008
Agilent	N9020A/ SIGNAL ANALYZER	05/23/2014	Annual	05/23/2015	MY51110063
Agilent	N1911A/Power Meter	01/24/2014	Annual	01/24/2015	MY45100523
Agilent	N1921A /POWER SENSOR	07/11/2013	Annual	07/11/2014	MY45241059
Hewlett Packard	11636B/Power Divider	10/22/2013	Annual	10/22/2014	11377
Agilent	87300B/Directional Coupler	12/18/2013	Annual	12/18/2014	3116A03621
Hewlett Packard	11667B / Power Splitter	01/27/2014	Annual	01/27/2015	10545
DIGITAL	EP-3010 /DC POWER SUPPLY	10/29/2013	Annual	10/29/2014	3110117
ITECH	IT6720 / DC POWER SUPPLY	11/05/2013	Annual	11/05/2014	010002156287001199
Agilent	8493C / Attenuator(10 dB)	07/24/2013	Annual	07/24/2014	76649
WEINSCHEL	2-3 / Attenuator(3 dB)	10/28/2013	Annual	10/28/2014	BR0617
NAENG YEOL CO.LTD	NY-THR18750/ Temp & Humidity Chamber	10/30/2013	Annual	10/30/2014	NY-200912201A
Note:					

## 9.2 LIST OF TEST EQUIPMENT(Radiated Test)

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Calibration Due	Serial No.
Schwarzbeck	VULB 9160/ TRILOG Antenna	12/17/2012	Biennial	12/17/2014	3150
Rohde & Schwarz	ESCI / EMI TEST RECEIVER	01/24/2014	Annual	01/24/2015	100584
HD	MA240/ Antenna Position Tower	N/A	N/A	N/A	556
EMCO	1050/ Turn Table	N/A	N/A	N/A	114
HD GmbH	HD 100/ Controller	N/A	N/A	N/A	13
HD GmbH	KMS 560/ SlideBar	N/A	N/A	N/A	12
Rohde & Schwarz	SCU-18/ Signal Conditioning Unit	09/10/2013	Annual	09/10/2014	10094
CERNEX	CBL18265035 / POWER AMP	07/24/2013	Annual	07/24/2014	22966
CERNEX	CBL26405040 / POWER AMP	04/04/2014	Annual	04/04/2015	19660
Schwarzbeck	BBHA 9120D/ Horn Antenna	07/05/2013	Biennial	07/05/2015	1151
Schwarzbeck	BBHA9170 / Horn Antenna(15 GHz ~ 40 GHz)	10/30/2012	Biennial	10/30/2014	BBHA9170124
Rohde & Schwarz	FSV40/Spectrum Analyzer	06/09/2014	Annual	06/09/2015	1307.9002K40-100931-NK
Rohde & Schwarz	FSP / Spectrum Analyzer	01/24/2014	Annual	01/24/2015	839117/011
Wainwright Instrument	WHF3.0/18G-10EF / High Pass Filter	02/03/2014	Annual	02/03/2015	F6
Wainwright Instrument	WHNX6.0/26.5G-6SS / High Pass Filter	04/09/2014	Annual	04/09/2015	1
Wainwright Instrument	WHNX7.0/18G-8SS / High Pass Filter	04/04/2014	Annual	04/04/2015	29
Wainwright Instrument	WRCJ2400/2483.5-2370/2520-60/14SS/ Band Reject Filter	06/24/2013	Annual	06/24/2014	1
Rohde & Schwarz	LOOP ANTENNA	08/14/2012	Biennial	08/14/2014	100179
CERNEX	CBL06185030 / POWER AMP	07/24/2013	Annual	07/24/2014	22965
CERNEX	CBLU1183540 / POWER AMP	07/24/2013	Annual	07/24/2014	22964
Note:					