

TEST REPORT

of

FCC Part 15 Subpart B&C §15.247/RSS-210 Issue 7, RSS-Gen Issue 2
FCC ID/IC Certification: A3LWEP650 / 649E-WEP650

Equipment Under Test : Bluetooth Mono Headset
Model Name : WEP650
Serial No. : N/A
Applicant : Samsung Electronics Co., Ltd.
Manufacturer : Samsung Electronics Co., Ltd.
Date of Test(s) : 2008-10-10 ~ 2008-11-07
Date of Issue : 2008-11-10

In the configuration tested, the EUT complied with the standards specified above.

Tested By:



Date

2008-11-10

Geoffrey Do

Approved By



Date

2008-11-10

Jim Kim

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Table of contents

1. General information -----	3
2. Transmitter AC power line conducted emission-----	8
3. Receiver AC power line conducted emission-----	13
4. Transmitter radiated spurious emissions and conducted spurious emission -----	17
5. Receiver Radiated Spurious Emission-----	30
6. 20dB bandwidth and 99% bandwidth -----	32
7. Maximum peak output power -----	38
8. Hopping channel separation -----	44
9. Number of hopping frequency -----	47
10. Time of occupancy(Dwell time) -----	51
11. Power spectral density -----	58
12. Antenna requirement -----	64
13. RF Exposure evaluation -----	65

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

1. General information

1.1 Testing laboratory

SGS Testing Korea Co., Ltd.

Wireless Div. 2FL, 18-34, Sanbon-dong, Gunpo-si, Gyeonggi-do, Korea 435-040

www.electrolab.kr.sgs.com

Telephone : +82 +31 428 5700

FAX : +82 +31 427 2371

1.2 Details of applicant

Applicant : Samsung Electronics Co., Ltd.

Address : 461, Maetan-dong, Yeongtong-gu, Suwon-city, Gyeonggi-do, Korea

Contact Person : Jin-kyeong Kim

Phone No. : +82 +31 301 4187

Fax No. : +82 +31 279 7609

1.3 Description of EUT

Kind of Product	Bluetooth Mono Headset
Model Name	WEP650
Serial Number	N/A
Power Supply	3.7 V
Frequency Range	2402 ~ 2480 MHz
Modulation Technique	GFSK, $\pi/4$ DQPSK, 8DPSK
Number of Channels	79
Operating Conditions	-20°C ~ 50°C
Antenna Type	Fixed type(Monopole Antenna)
Antenna Gain	-0.66 dBi
H/W version	0.2
S/W version	0.3

1.4 Details of Modification

-N/A

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

1.5. Information about the FHSS characteristics:

1.5.1. Pseudorandom frequency hopping sequence

The channel is represented by a pseudo-random hopping sequence hopping through the 79 RF channels. The hopping sequence is unique for the piconet and is determined by the Bluetooth device address of the master; the phase in the hopping sequence is determined by the Bluetooth clock of the master. The channel is divided into time slots where each slot corresponds to an RF hop frequency. Consecutive hops correspond to different RF hop frequencies. The nominal hop rate is 1600 hops/s.

1.5.2. Medium access protocol

The manufacturer declares that the device uses Bluetooth protocol.

1.5.3. System Receiver Input Bandwidth

Each channel bandwidth is 1MHz

1.6 Test equipment list

Equipment	Manufacturer	Model	Cal Due.
Signal Generator	Agilent	E4438C	May 09, 2009
Spectrum Analyzer	Agilent	E4440A	May 09, 2009
Bluetooth Tester	TESOM	TC-3000B	Dec. 10, 2009
Directional Coupler	Narda	4226-20	Feb. 04, 2009
High Pass Filter	Wainwright Instrument GmbH	WHK3.0/18G-11SS	Dec. 01, 2009
DC Power Supply	Agilent	6553A	Dec. 01, 2009
Preamplifier	H.P	8447F	Jul. 01, 2009
Preamplifier	Rohde & Schwarz	SCU_F0118_G35_AFS4 2_CSS(F)	Aug. 25, 2009
Two-Line V-Network	Rohde & Schwarz	ENV216	Jan. 17, 2009
Test Receiver	Rohde & Schwarz	ESVS10	Mar. 21, 2009
Test Receiver	Rohde & Schwarz	ESHS10	Jul. 21, 2009
Ultra-Broadband Antenna	Rohde & Schwarz	HL562	Dec. 09, 2009
Horn Antenna	Electro-Metrics	HF906	Nov. 13, 2009
Anechoic Chamber	SY Corporation	L x W x H (6.5 m x 3.5 m x 3.5 m)	Feb. 15, 2009

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

1.7. Summary of test results

The EUT has been tested according to the following specifications:

Applied standard : FCC Part15 subpart B&C, RSS-210, RSS-Gen			
Standard section		Test item	Result
15.207	RSS-Gen 7.2.2	Transmitter AC power line conducted emission	Complied
15.107	RSS-Gen 7.2.2	Receiver AC power line conducted emission	Complied
15.205(a) 15.209 15.247(d)	A8.5	Transmitter radiated spurious emissions and Conducted spurious emission	Complied
15.109(a)	RSS-Gen 6	Receiver Radiated Spurious Emission	Complied
15.247(a)(1)	A8.1(1)	20 dB bandwidth	Complied
15.247(b)(1)	A8.4(2)	Maximum peak output power	Complied
15.247(a)(1)	A8.1(2)	Frequency separation	Complied
15.247(a)(1)(iii)	A8.1(4)	Number of hopping frequency	Complied
15.247(a)(1)(iii)	A8.1(4)	Time of occupancy (Dwell time)	Complied
15.247(f)	A8.3(2)	Power spectral density	Complied
15.247(i) 1.1307(b)(1)	RSS-Gen 5.5/ RSS-102	RF exposure evaluation	Complied

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

1.8. Test report revision

Revision	Report number	Description
0	F690501/RF-RTL002758	Initial

1.9. Conclusion of worst-case and operation mode

The EUT has three type of modulation (GFSK, $\pi/4$ DQPSK and 8DPSK).


Modulation Type	Output power(dBm)	Output power(mW)	Symbol rate
GFSK(2441 MHz)	2.26	1.68	1Mbps
$\pi/4$ DQPSK(2441 MHz)	2.92	1.96	2Mbps
8DPSK(2441 MHz)	3.10	2.04	3Mbps

Therefore all applicable requirements were tested a type of higher output power modulation (GFSK and 8DPSK).

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

2. Transmitter AC power line conducted emission

2.1. Test Setup

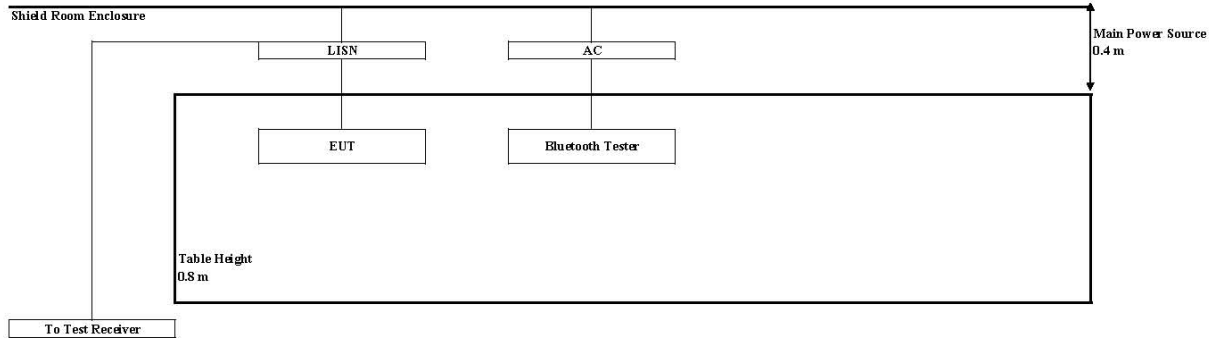

2.2. Limit

According to §15.207(a) for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 uH/50 ohm line impedance stabilization network(LISN).

Compliance with the provision of this paragraph shall on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower applies at the boundary between the frequency ranges.

Frequency of Emission (MHz)	Conducted limit (dBμV)	
	Quasi-peak	Average
0.15 – 0.50	66-56*	56-46*
0.50 – 5.00	56	46
5.00 – 30.0	60	50

■ Decreases with the logarithm of the frequency.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

2.3. Test procedures

Radiated emissions from the EUT were measured according to the dictates of ANSI C63.4:2003

1. The test procedure is performed in a 6.5m × 3.6m × 3.6m (L×W×H) shielded room. The EUT along with its peripherals were placed on a 1.0m(W)× 1.5m(L) and 0.8m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane.
2. The EUT was connected to power mains through a line impedance stabilization network (LISN) which provides 50 ohm coupling impedance for measuring instrument and the chassis ground was bounded to the horizontal ground plane of shielded room.
3. All peripherals were connected to the second LISN and the chassis ground also bounded to the horizontal ground plane of shielded room.
4. The excess power cable between the EUT and the LISN was bundled. The power cables of peripherals were unbundled. All connecting cables of EUT and peripherals were moved to find the maximum emission.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

2.4. Test result (Worst case configuration_8DPSK mode)

The following table shows the highest levels of conducted emissions on both phase of Hot and Neutral line.

Ambient temperature : 23 °C
 Relative humidity : 45 % R.H.

Frequency range : 0.15 MHz – 30 MHz
 Measured Bandwidth : 9 kHz

Freq. (MHz)	Level (dBUV)		Line	Limit (dBUV)		Margin (dB)	
	Q-Peak	Average		Q-Peak	Average	Q-Peak	Average
0.20	24.00	13.10	H	63.61	53.61	39.61	40.51
0.55	17.30	12.70	H	56.00	46.00	38.70	33.30
0.76	24.20	13.10	H	56.00	46.00	31.80	32.90
1.10	16.60	12.70	H	56.00	46.00	39.40	33.30
3.78	17.50	12.80	H	56.00	46.00	38.50	33.20
29.60	24.00	16.00	H	60.00	50.00	36.00	34.00
0.15	18.20	12.90	N	66.00	56.00	47.80	43.10
0.29	27.90	13.70	N	60.52	50.52	32.62	36.82
1.33	25.80	13.20	N	56.00	46.00	30.20	32.80
4.23	16.90	12.90	N	56.00	46.00	39.10	33.10


■ Note

Line (H) : Hot
 Line (N) : Neutral

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


Plot of conducted power line

Test mode : (Hot)

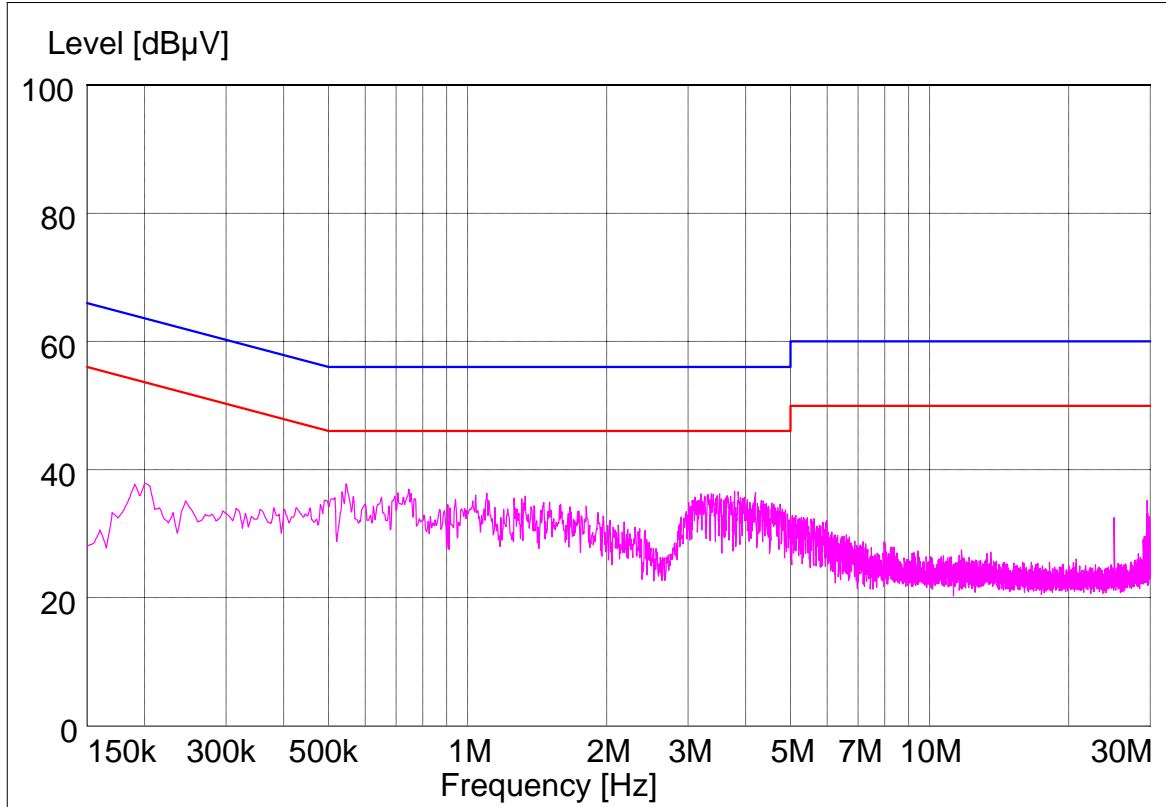

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Test mode : (Neutral)

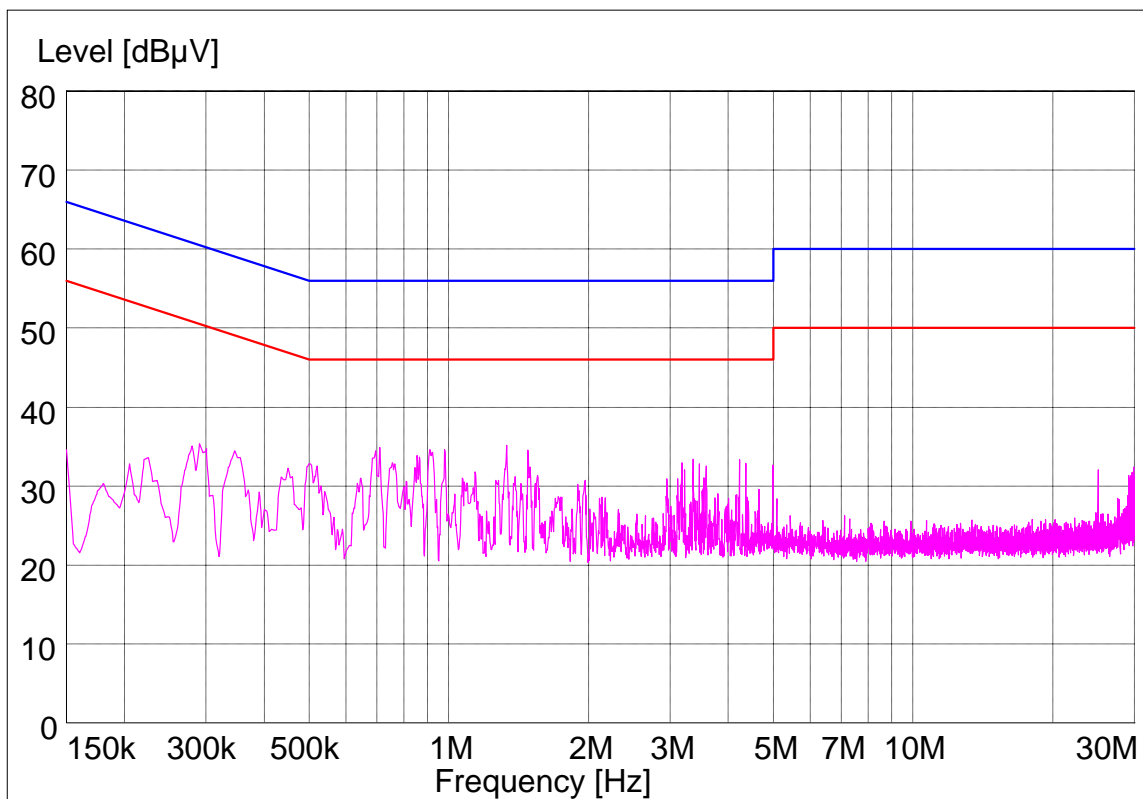

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

3. Receiver AC power line conducted emission

3.1. Test Setup

Same as clause 2.1.

3.2. Limit

According to §15.107(a) Except for Class A digital devices, for equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the band edges.

Frequency of Emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15 – 0.50	66-56*	56-46*
0.50 – 5.00	56	46
5.00 – 30.0	60	50

■ Decreases with the logarithm of the frequency.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

3.3. Test procedures

Same as clause 2.3.

3.4. Test result (Worst case configuration_8DPSK mode)

The following table shows the highest levels of conducted emissions on both phase of Hot and Neutral line.

Ambient temperature : 23 °C
 Relative humidity : 45 % R.H.

Frequency range : 0.15 MHz – 30 MHz
 Measured Bandwidth : 9 kHz

Freq. (MHz)	Level (dBuV)		Line	Limit (dBuV)		Margin (dB)	
	Q-Peak	Average		Q-Peak	Average	Q-Peak	Average
24.28	29.60	19.30	H	60.00	50.00	30.40	30.70
24.28	23.40	15.78	N	36.60	34.22	36.60	34.22


■ Note

Line (H) : Hot
 Line (N) : Neutral

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


Plot of conducted power line

Test mode : (Hot)

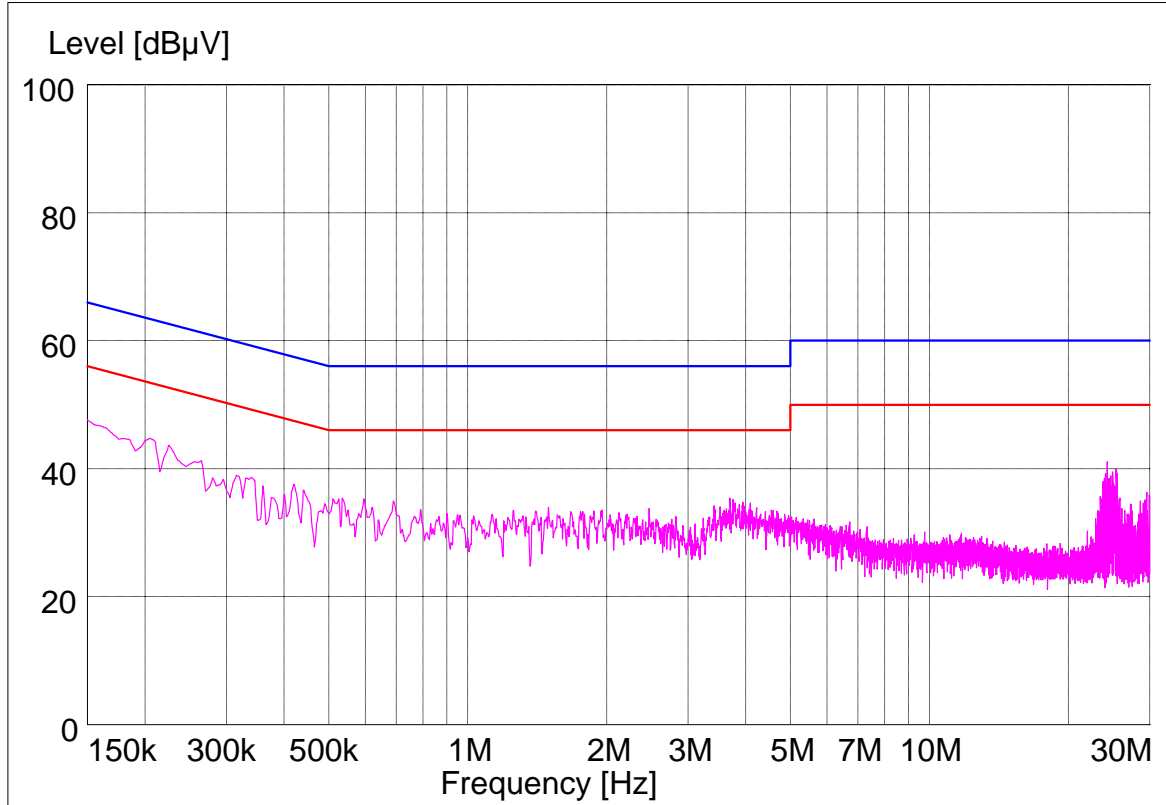

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Test mode : (Neutral)

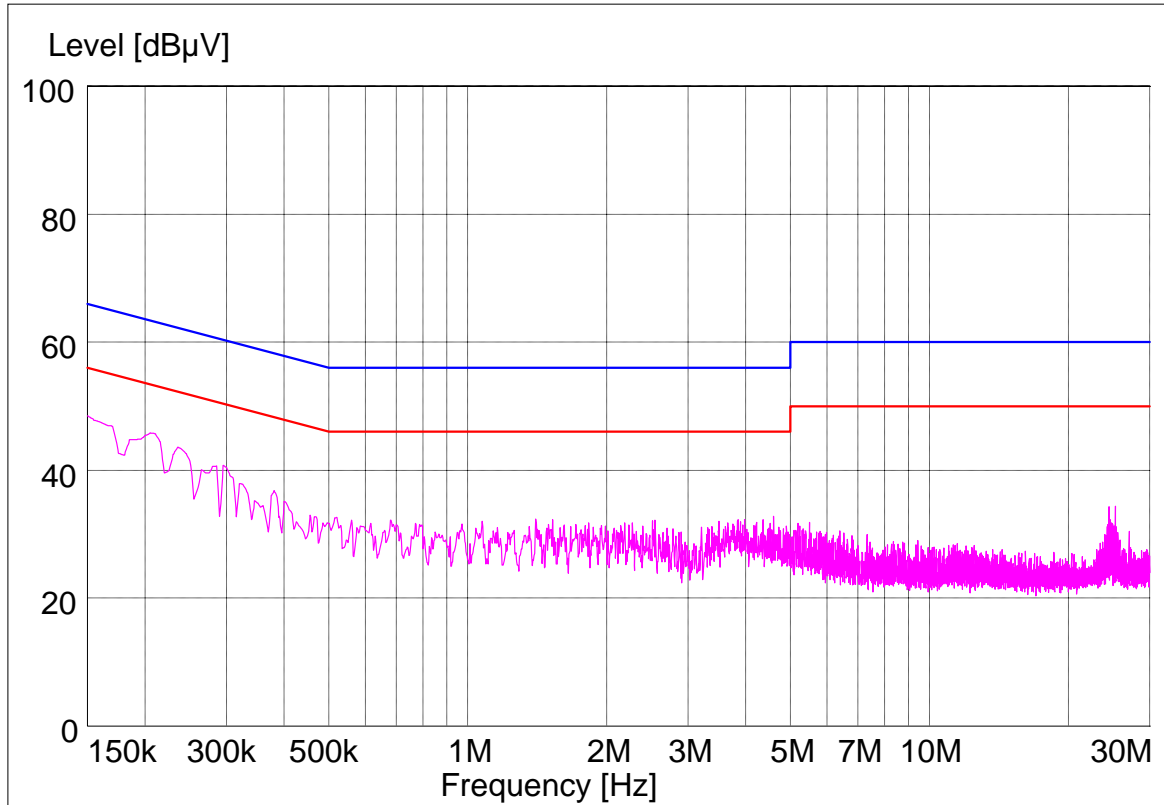


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

4. Transmitter radiated spurious emissions and conducted spurious emission


4.1. Test setup

4.1.1. Transmitter radiated spurious emissions

The diagram below shows the test setup that is utilized to make the measurements for emission from 30 MHz to 1 GHz Emissions.

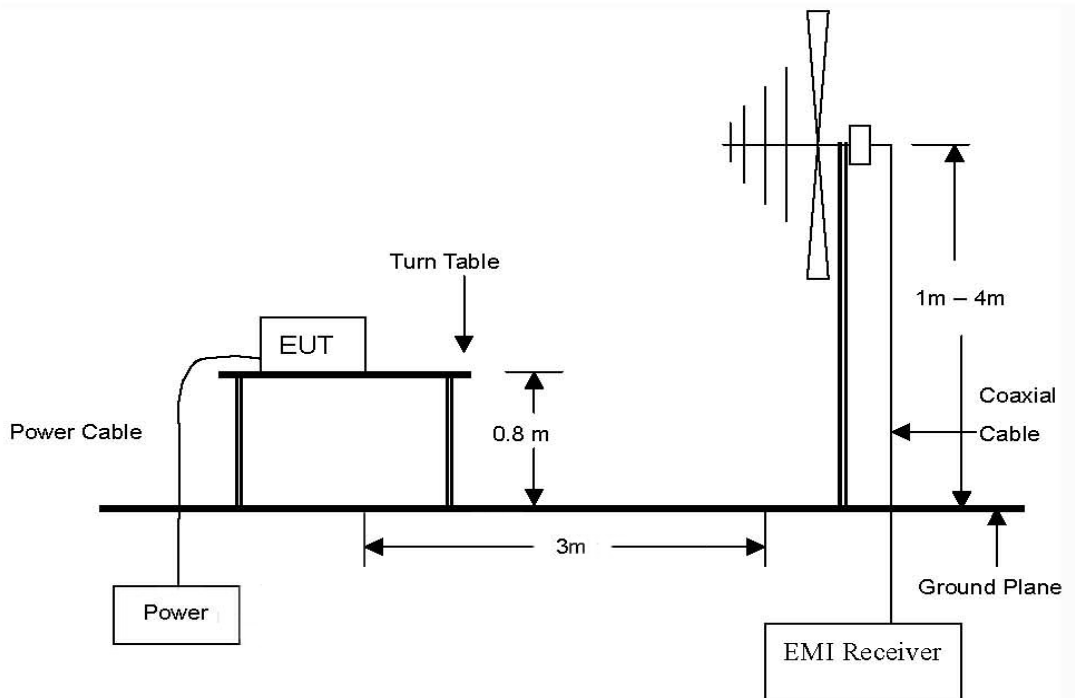


The diagram below shows the test setup that is utilized to make the measurements for emission from 1 GHz to 24 GHz Emissions.

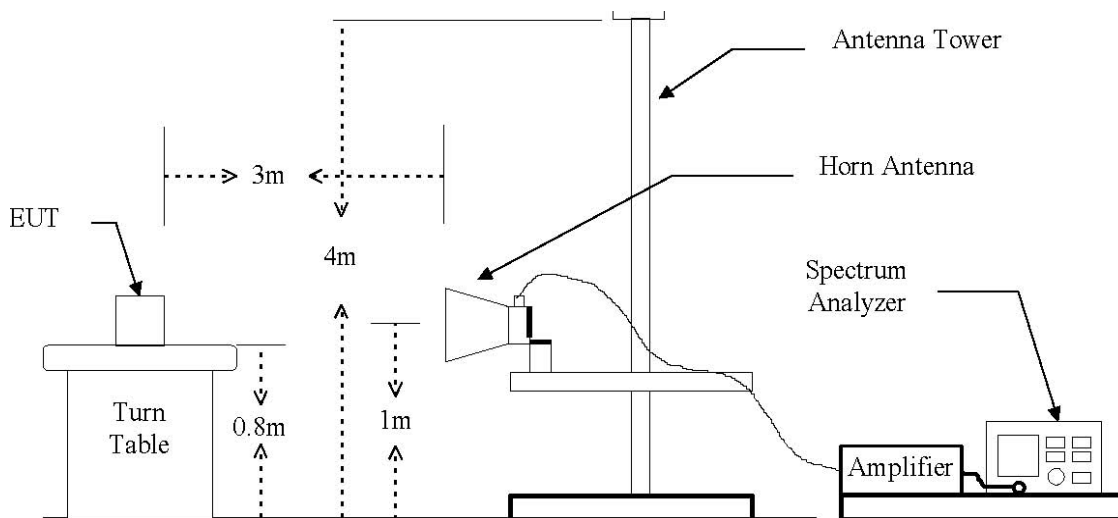

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

4.1.2. Conducted spurious emissions

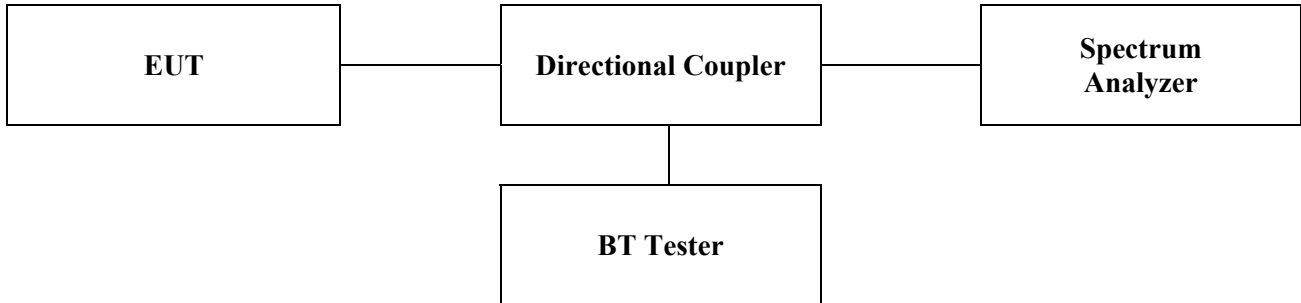

4.2. Limit

According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement , provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval , as permitted under paragraph(b)(3) of this section , the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in section §15.209(a) is not required. In addition, radiated emission which in the restricted band, as define in section §15.205(a), must also comply the radiated emission limits specified in section §15.209(a) (see section §15.205(c))

According to § 15.109(a), for an intentional radiator devices, the general required of field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values :

Frequency (MHz)	Distance (Meters)	Radiated (dB μ V/m)	Radiated (μ V/m)
30 - 88	3	40.0	100
88 – 216	3	43.5	150
216 – 960	3	46.0	200
Above 960	3	54.0	500

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

4.3. Test procedures

Radiated emissions from the EUT were measured according to the dictates of ANSI C63.4:2003

4.3.1. Test procedures for radiated spurious emissions

1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation.
2. During performing radiated emission below 1 GHz, the EUT was set 3 meters away from the interference receiving antenna, which was mounted on the top of a variable-height antenna tower. During performing radiated emission above 1 GHz, the EUT was set 3 meter away from the interference-receiving antenna.
3. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

■ Note

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1 GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1MHz for Peak detection and frequency above 1 GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1 GHz.

4.3.2. Test procedures for conducted spurious emissions

1. The transmitter output was connected to the spectrum analyzer through an attenuator.
2. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using RBW=100 kHz, VBW=100 kHz.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

4.4. Test result

Ambient temperature : 23 °C
 Relative humidity : 45 % R.H.

4.4.1. Spurious radiated emission (Worst case configuration_8DPSK mode)

The frequency spectrum from 30 MHz to 1000 MHz was investigated. All emissions are not reported much lower than the prescribed limits. All reading values are quasi-peak values.

Radiated Emissions			Ant	Correction Factors		Total	Limit	
Frequency (MHz)	Reading (dBuV)	Detect Mode	Pol.	AF (dB/m)	Amp Gain+CL (dB)	Actual (dBuV/m)	Limit (dBuV/m)	Margin (dB)
97.90	32.50	Q.P.	V	9.04	-26.87	14.67	43.50	28.83
289.48	31.70	Q.P.	V	10.59	-25.29	17.00	46.00	29.00
837.53	33.10	Q.P.	V	20.16	-24.85	28.41	46.00	17.59

■ Remark:

1. All spurious emission at low, middle and high channel are almost the same below 1 GHz, so the spurious emission test result of the high channel was chosen as representative in final test.
2. "*" means the restricted band.
3. To get a maximum emission level from the EUT, the EUT was moved throughout the XY, XZ and YZ planes.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

4.4.2. Spurious radiated emission

The frequency spectrum above 1000 MHz was investigated. All emissions are not reported much lower than the prescribed limits.

Operation mode: GFSK

A. Low Channel (2402 MHz)

Radiated Emissions			Ant	Correction Factors		Total	Limit	
Frequency (MHz)	Reading (dBuV)	Detect Mode	Pol.	AF (dB/m)	Amp Gain+CL (dB)	Actual (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2390.0*	54.56	P	V	28.05	-34.80	47.81	74.00	26.19
4803.48	44.78	P	V	32.95	-31.70	46.03	74.00	27.97
Above 4900	Not Detected							

B. Middle Channel (2441 MHz)

Radiated Emissions			Ant	Correction Factors		Total	Limit	
Frequency (MHz)	Reading (dBuV)	Detect Mode	Pol.	AF (dB/m)	Amp Gain+CL (dB)	Actual (dBuV/m)	Limit (dBuV/m)	Margin (dB)
4881.95	33.17	P	V	33.17	-31.89	34.45	74.00	39.55
Above 4900	Not Detected							

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

C. High Channel (2480 MHz)

Radiated Emissions			Ant	Correction Factors		Total	Limit	
Frequency (MHz)	Reading (dBuV)	Detect Mode	Pol.	AF (dB/m)	Amp Gain+CL (dB)	Actual (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2483.5*	45.96	P	V	28.18	-34.67	39.47	74.00	34.53
4959.96	46.34	P	V	33.39	-31.68	48.05	74.00	25.95
Above 5000	Not Detected							

■ Remarks

1. "*" means the restricted band.
2. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental Frequency.
3. Radiated emissions measured in frequency above 1000 MHz were made with an instrument using peak/average detector mode.
4. Average test would be performed if the peak result were greater than the average limit.
5. To get a maximum emission level from the EUT, the EUT was moved throughout the XY, XZ and YZ planes.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Operation Mode: 8DPSK

A. Low Channel (2402 MHz)

Radiated Emissions			Ant	Correction Factors		Total	Limit	
Frequency (MHz)	Reading (dBuV)	Detect Mode	Pol.	AF (dB/m)	Amp Gain+CL (dB)	Actual (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2390.0*	45.33	P	V	28.05	-34.80	38.58	74.00	35.42
4803.48	44.85	P	V	32.95	-31.70	46.10	74.00	27.90
Above 4900	Not Detected							

B. Middle Channel (2441 MHz)

Radiated Emissions			Ant	Correction Factors		Total	Limit	
Frequency (MHz)	Reading (dBuV)	Detect Mode	Pol.	AF (dB/m)	Amp Gain+CL (dB)	Actual (dBuV/m)	Limit (dBuV/m)	Margin (dB)
4881.95	47.55	P	V	33.39	-31.68	49.26	74.00	24.74
Above 4900	Not Detected							

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

C. High Channel (2480 MHz)

Radiated Emissions			Ant	Correction Factors		Total	Limit	
Frequency (MHz)	Reading (dBuV)	Detect Mode	Pol.	AF (dB/m)	Amp Gain+CL (dB)	Actual (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2483.5*	54.11	P	V	28.18	-34.67	47.62	74.00	26.38
4959.96	47.86	P	V	33.39	-31.68	49.57	74.00	24.43
Above 5000	Not Detected							

■ Remarks



1. "*" means the restricted band.
2. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental Frequency.
3. Radiated emissions measured in frequency above 1000 MHz were made with an instrument using peak/average detector mode.
4. Average test would be performed if the peak result were greater than the average limit.
5. To get a maximum emission level from the EUT, the EUT was moved throughout the XY, XZ and YZ planes.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

4.4.3. Spurious RF conducted emissions: Plot of spurious RF conducted emission



Operating Mode: GFSK

Low Channel

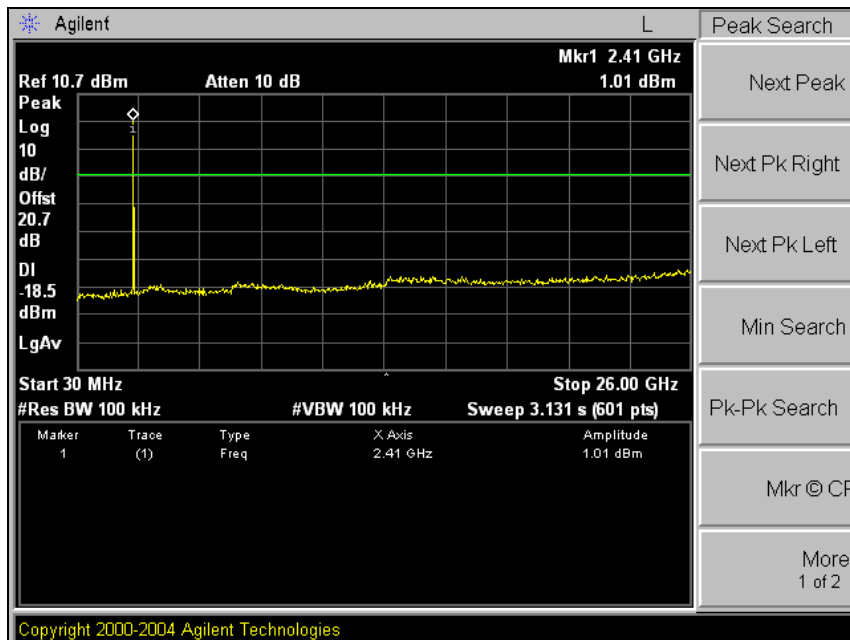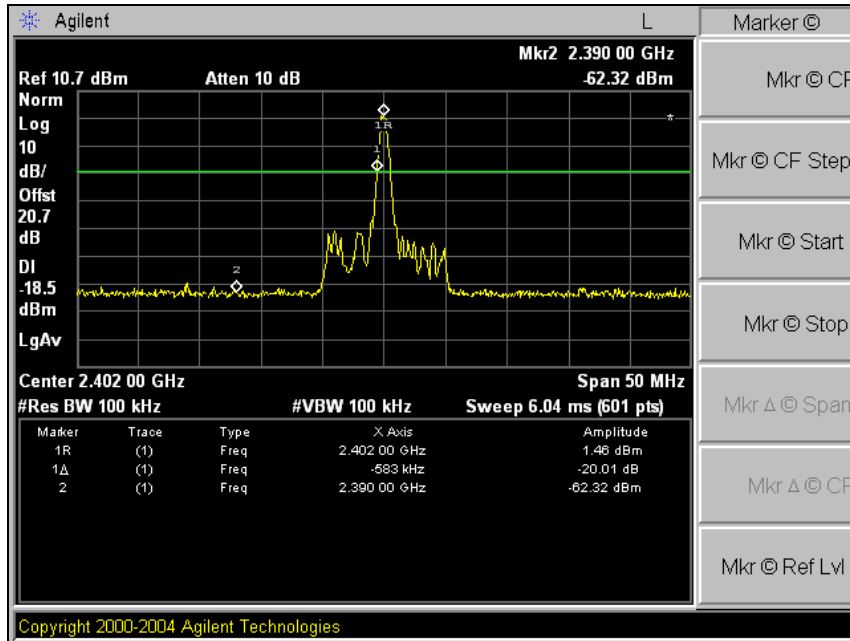



The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Middle Channel

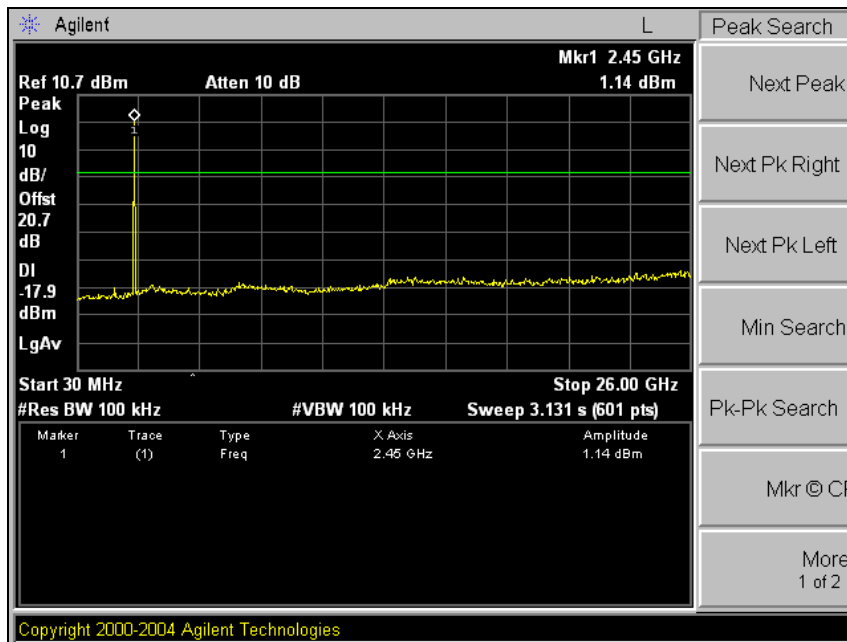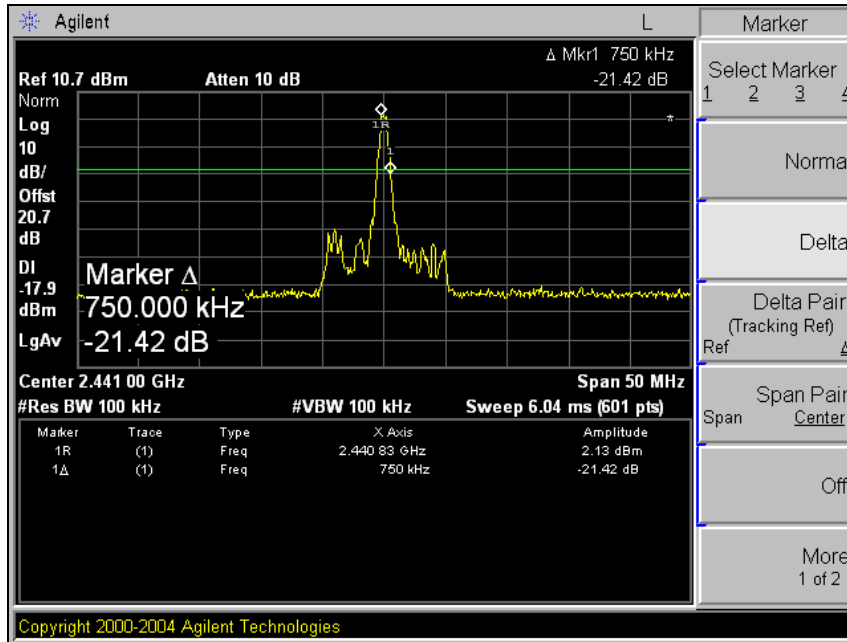

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.



High Channel

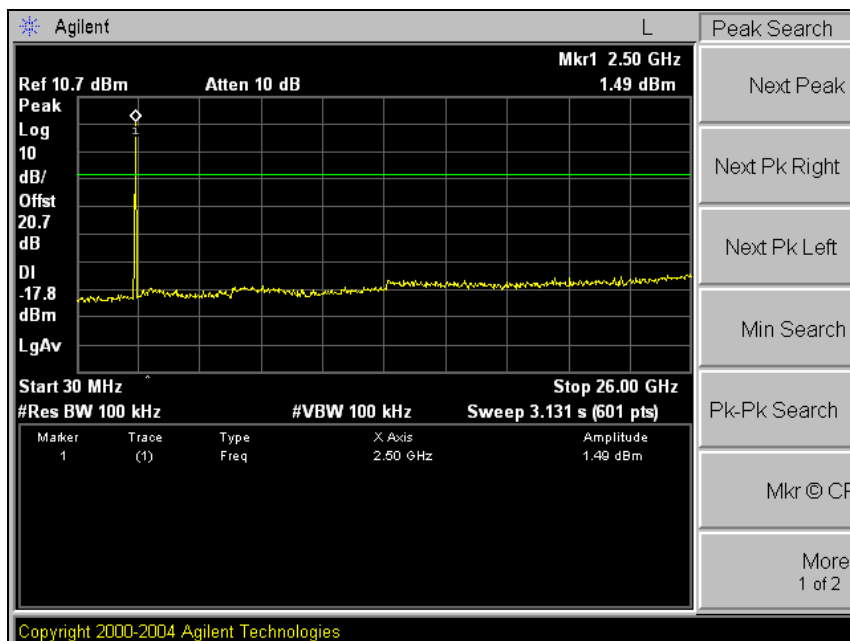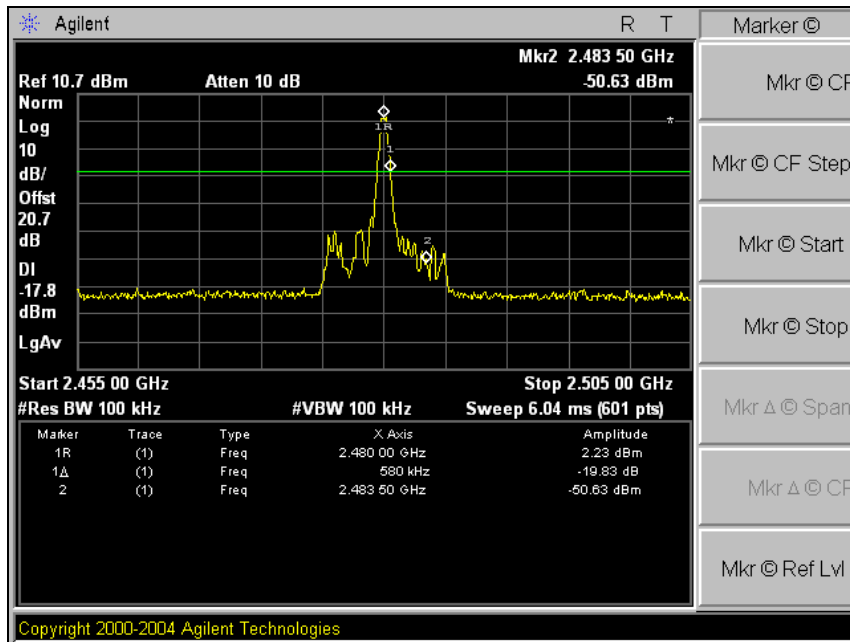

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.



Operating Mode: 8DPSK

Low Channel

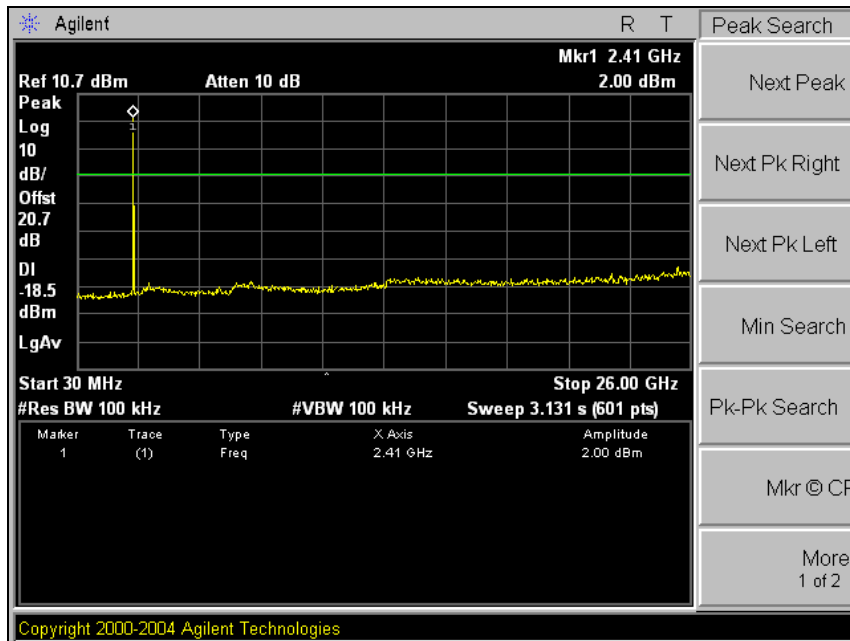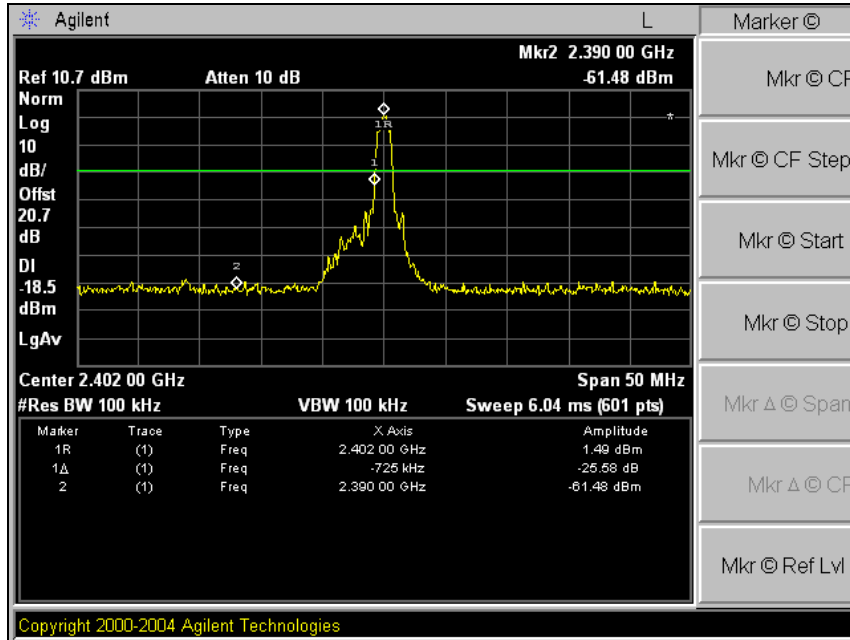



The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Middle Channel

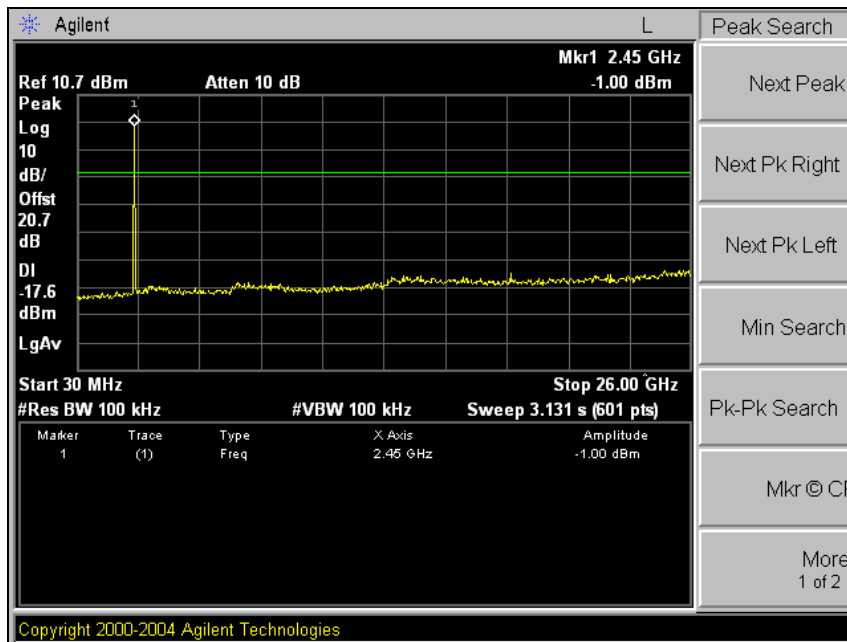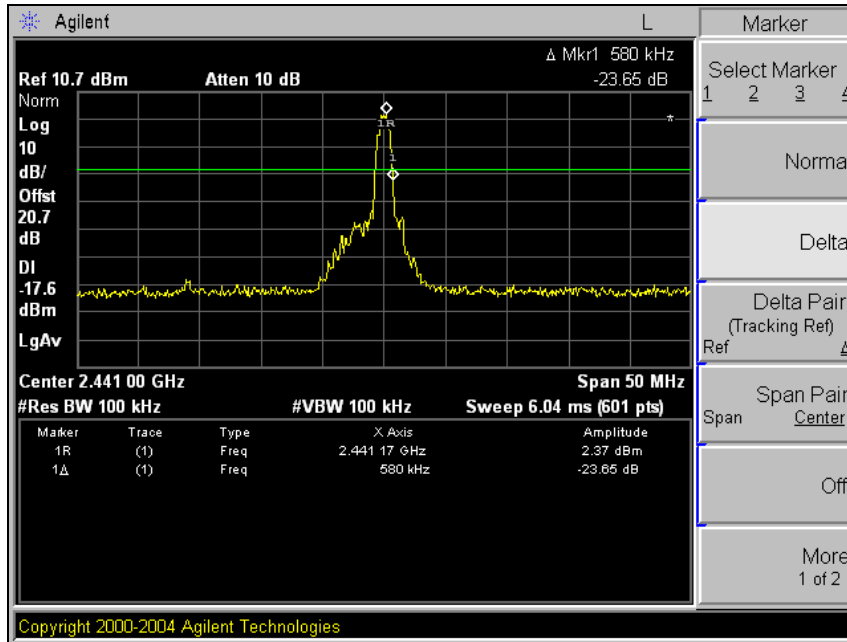

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

High Channel

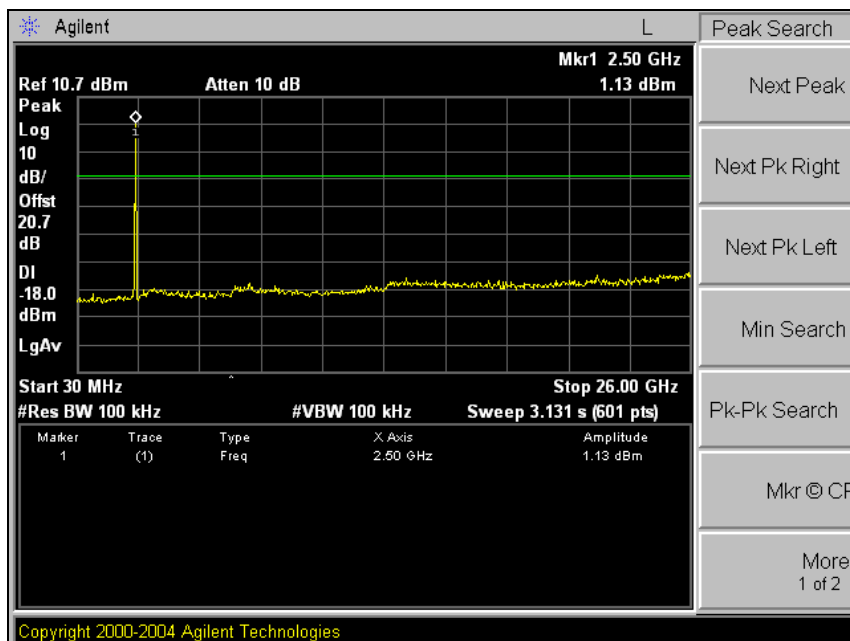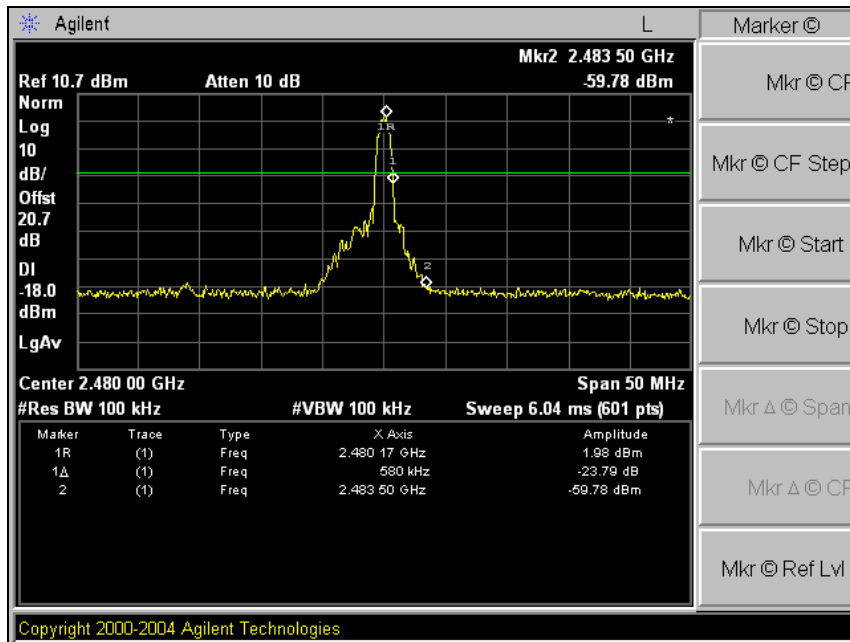

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

5. Receiver radiated spurious emissions

5.1. Test setup

Same as clause 4.1.

5.1.1. Receiver radiated spurious emissions

Same as clause 4.1.1.

5.2. Limit

According to §15.109(a), Except for Class A digital devices, the field strength of radiated emission from unintentional radiator at a distance of 3 m shall not exceed the following values:

Frequency (MHz)	Distance (Meters)	Radiated (dBµV/m)	Radiated (µV/m)
30 - 88	3	40.0	100
88 - 216	3	43.5	150
216 - 960	3	46.0	200
Above 960	3	54.0	500

5.3. Test procedures

Same as clause 4.3.

5.3.1. Test procedures for radiated spurious emissions

Same as clause 4.3.1.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

5.4. Test result

Ambient temperature : 23 °C
 Relative humidity : 45 % R.H.

5.4.1. Spurious radiated emission (Worst case configuration_8DPSK mode)

All emissions are not reported much lower than the prescribed limits. All reading values are quasi-peak values.

Radiated Emissions			Ant	Correction Factors		Total	Limit	
Frequency (MHz)	Reading (dBuV)	Detect Mode	Pol.	AF (dB/m)	Amp Gain+CL (dB)	Actual (dBuV/m)	Limit (dBuV/m)	Margin (dB)
228.85	31.6	Q.P.	V	8.63	-25.62	14.61	46.00	31.39
464.08	32.9	Q.P.	V	15.07	-25.76	22.21	46.00	23.79
956.35	33.2	Q.P.	V	21.38	-24.15	30.43	46.00	15.57


■ Remark:

1. All spurious emission at low, middle and high channel are almost the same below 1 GHz, so the spurious emission test result of the high channel was chosen as representative in final test.
2. “*” means the restricted band.
3. To get a maximum emission level from the EUT, the EUT was moved throughout the XY, XZ and YZ planes.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

6. 20 dB bandwidth and 99% bandwidth

6.1. Test setup

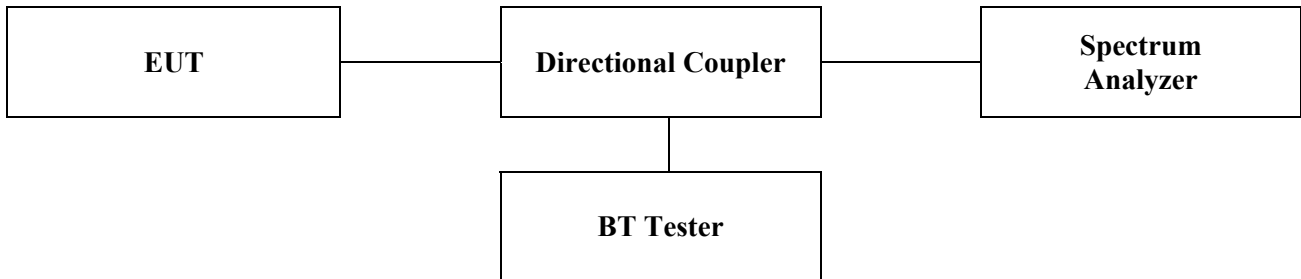

6.2. Limit

Limit: Not Applicable

6.3. Test procedure

1. The 20dB band width was measured with a spectrum analyzer connected to RF antenna connector(conducted measurement) while EUT was operating in transmit mode at the appropriate center frequency. The analyzer center frequency was set to the EUT carrier frequency, using the analyzer. Display Line and Marker Delta functions, the 20dB band width of the emission was determined.
2. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using RBW=10 kHz, VBW=10 kHz, Span=3 MHz.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

6.4. Test result


Ambient temperature : 24 °C
 Relative humidity : 46 % R.H.

Operation Mode	Channel frequency (MHz)	20 dB bandwidth (MHz)	99% bandwidth (MHz)
GFSK	2402	0.872	0.833
	2441	0.873	0.836
	2480	0.872	0.835
8DPSK	2402	1.206	1.154
	2441	1.207	1.153
	2480	1.205	1.154


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Operating mode: GFSK

Low channel

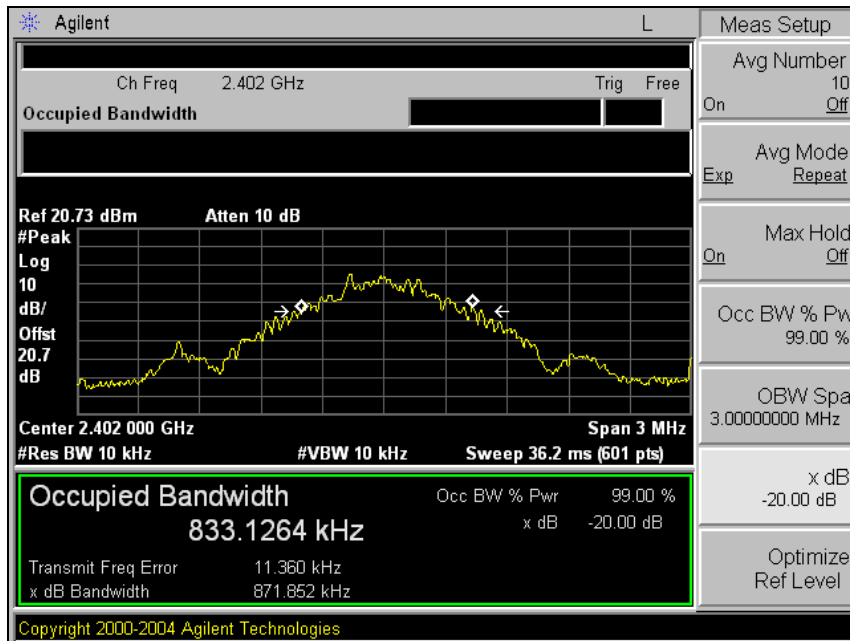


Middle channel

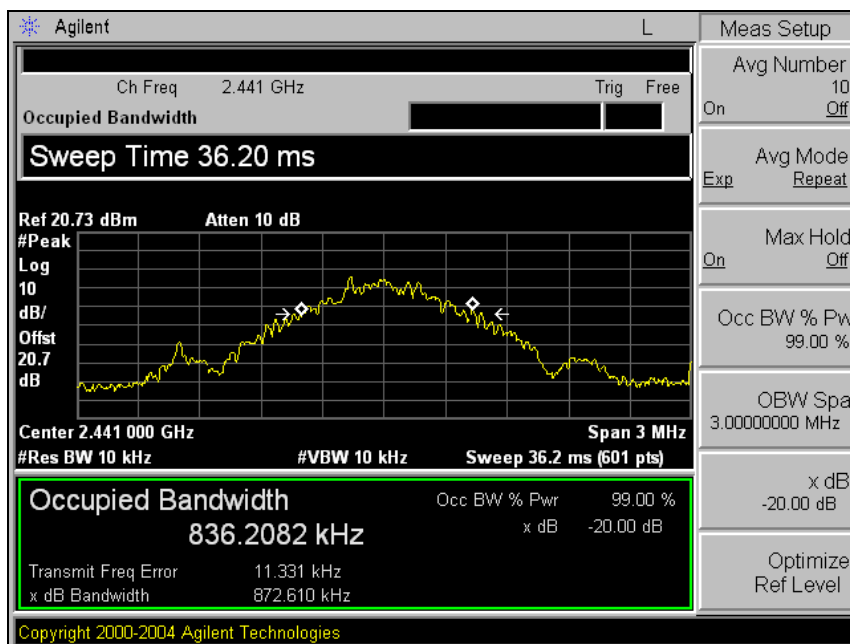

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


High channel

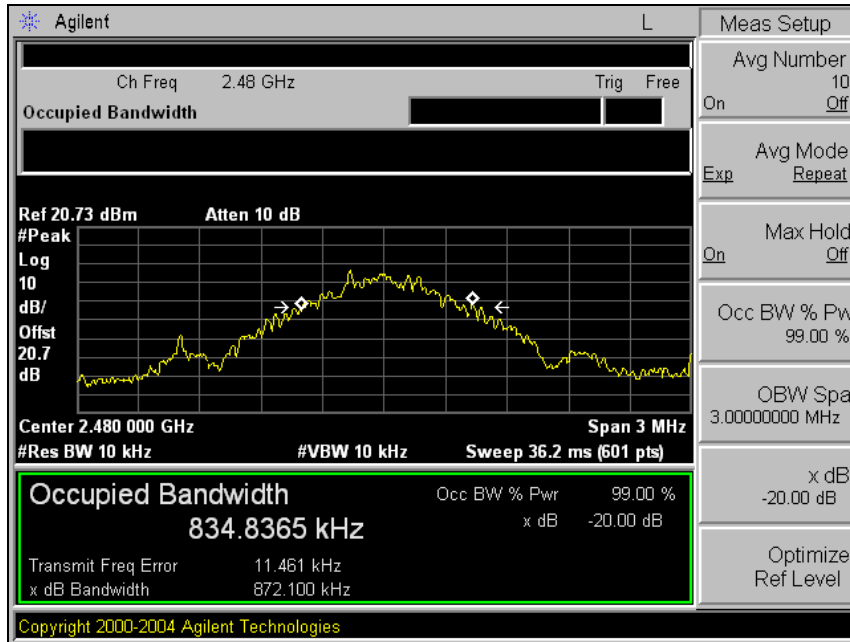


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Operating mode: 8DPSK

Low channel

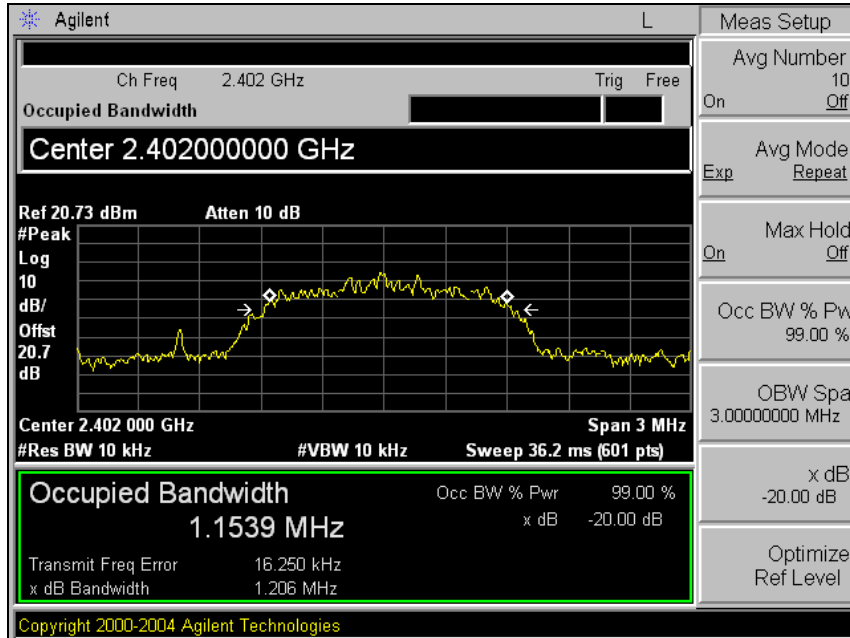


Middle channel

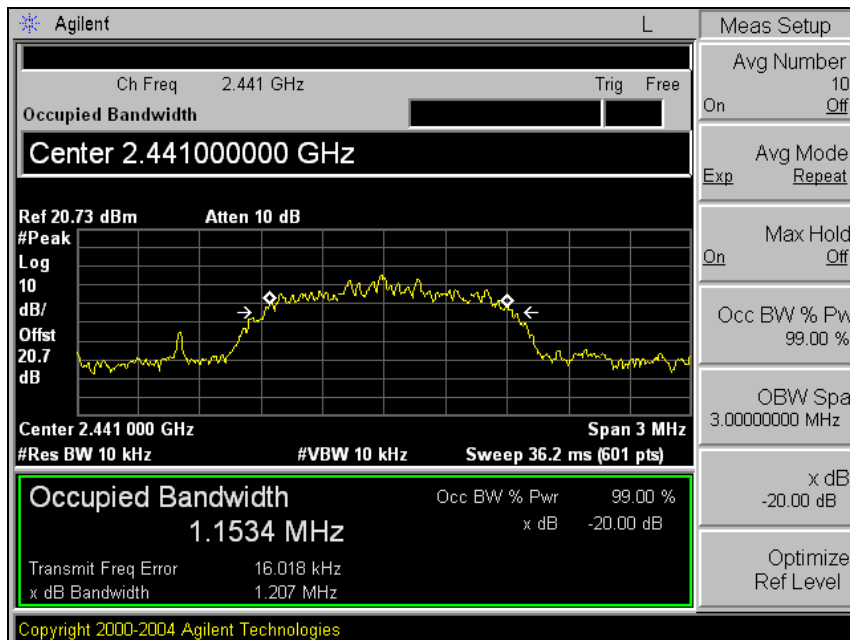

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


High channel

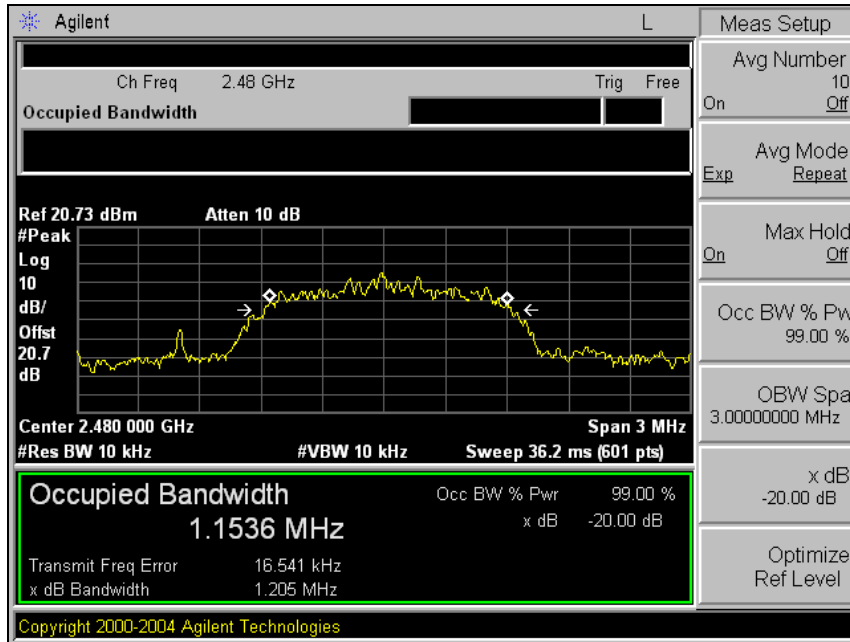

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

7. Maximum peak output power

7.1. Test setup

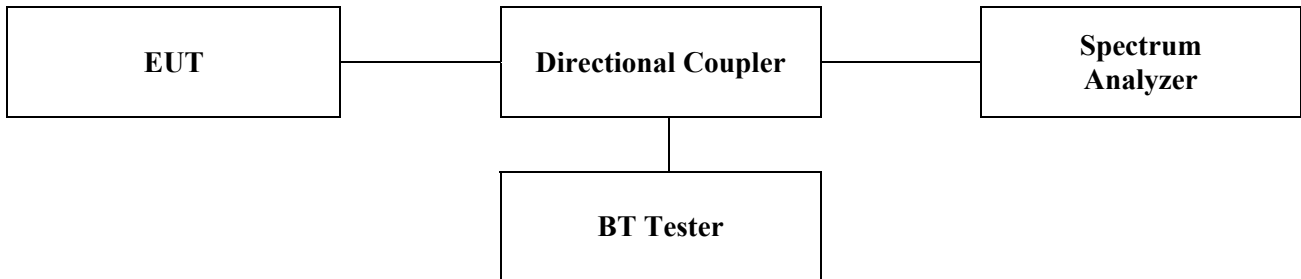

7.2. Limit

The maximum peak output power of the intentional radiator shall not exceed the following :

1. §15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.
Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.
2. §15.247(b)(3), for systems using digital modulation in the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz: 1 Watt.

4.3. Test procedure

1. The RF power output was measured with a Spectrum analyzer connected to the RF Antenna connector (conducted measurement) while EUT was operating in transmit mode at the appropriate center frequency, A spectrum analyzer was used to record the shape of the transmit signal.
2. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using ;
Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel
RBW \geq 20dB BW
VBW \geq RBW
Sweep = auto
Detector function = peak
Trace = max hold

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

7.4. Test result


Ambient temperature : 24 °C
 Relative humidity : 46 % R.H.

Operation mode	Channel	Frequency (MHz)	Peak power (dBm)	Limit (dBm)
GFSK	Low	2402	1.56	30
	Middle	2441	2.26	30
	High	2480	2.33	30
8DPSK	Low	2402	2.71	20.97
	Middle	2441	3.10	20.97
	High	2480	2.82	20.97


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Operating mode: GFSK

Low channel

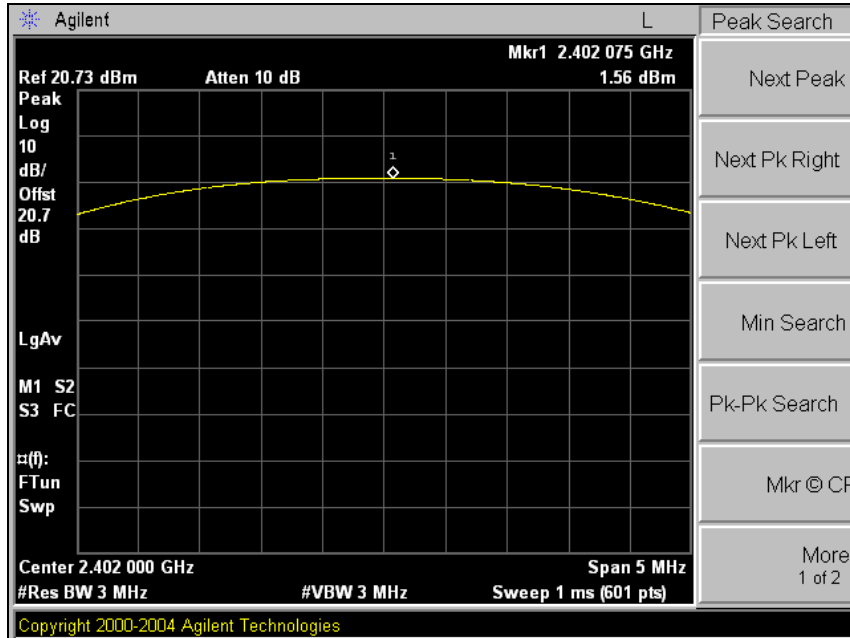


Middle channel

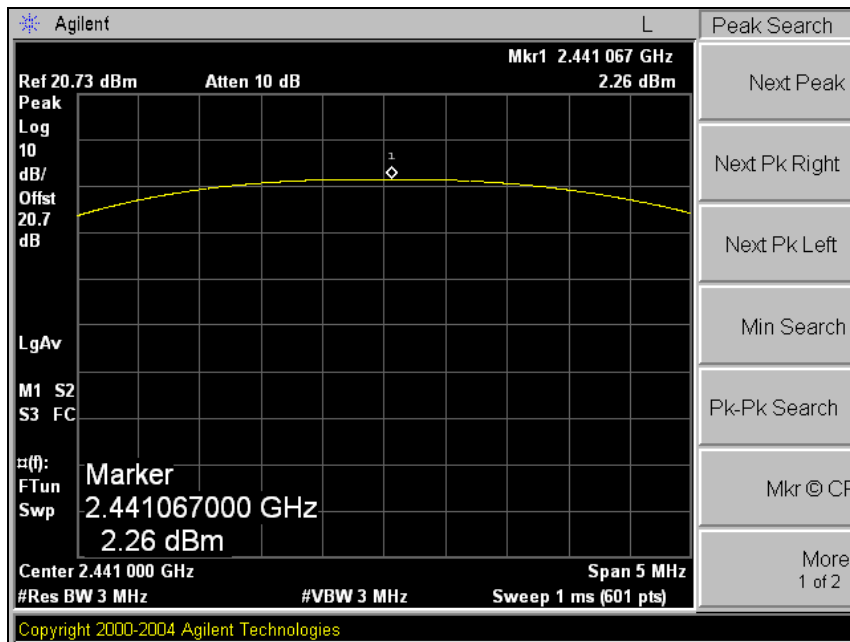

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


High channel

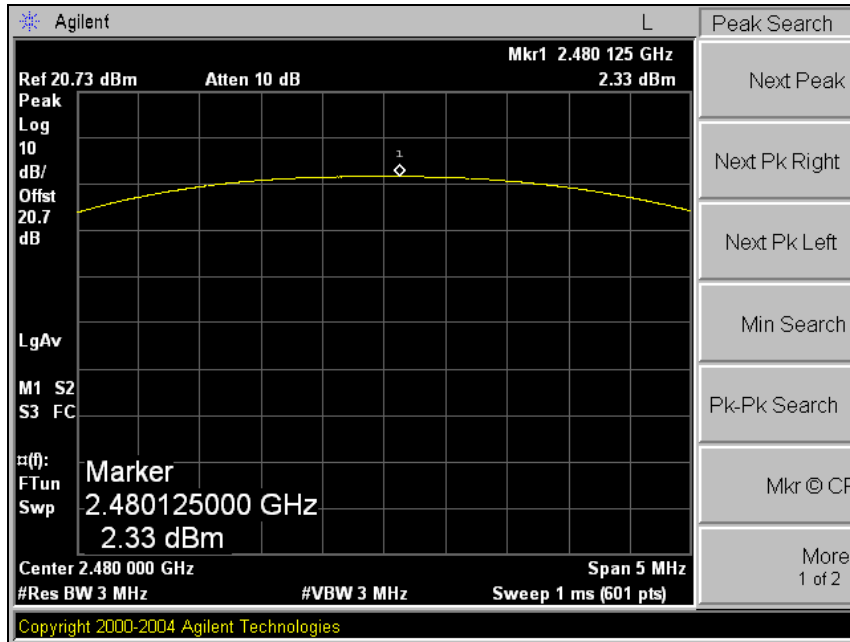


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Operating mode: 8DPSK

Low channel

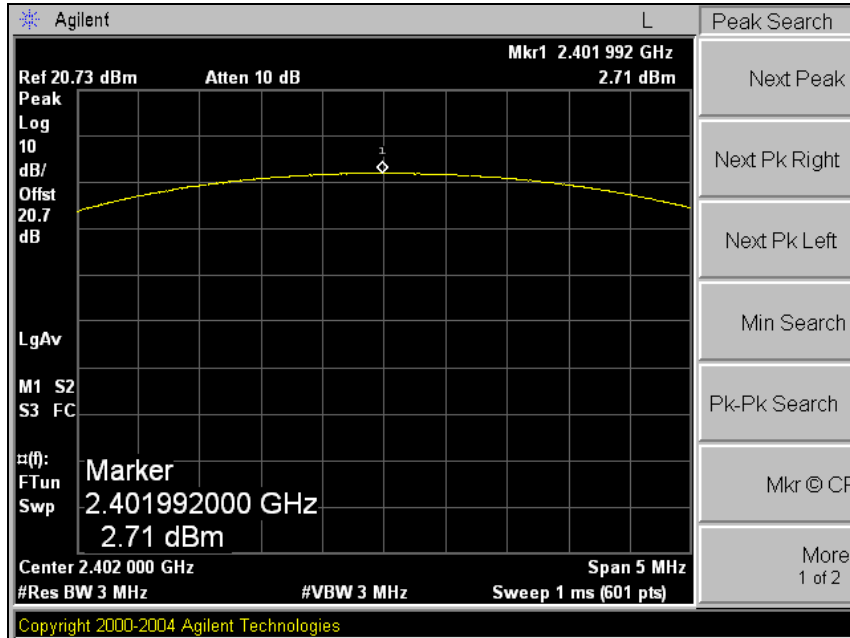


Middle channel

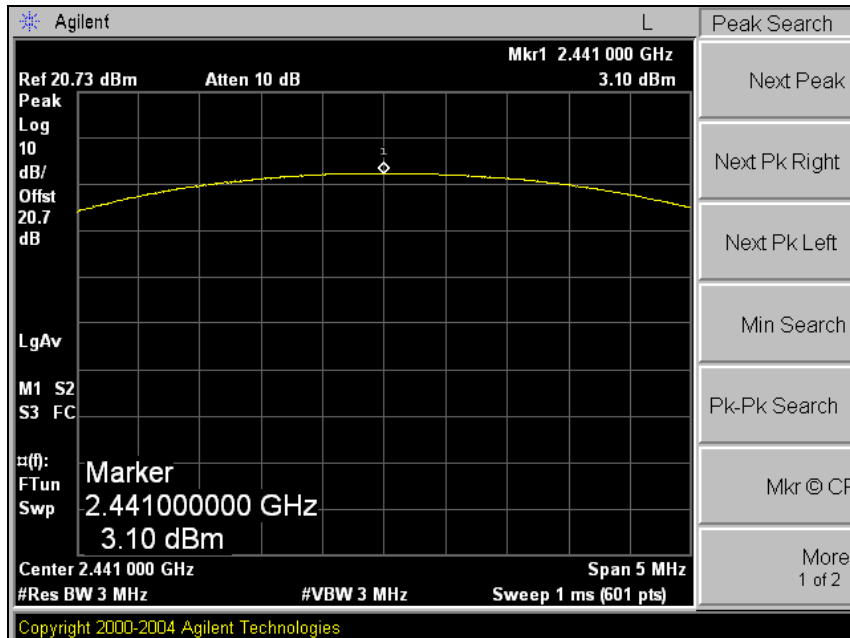

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


High channel

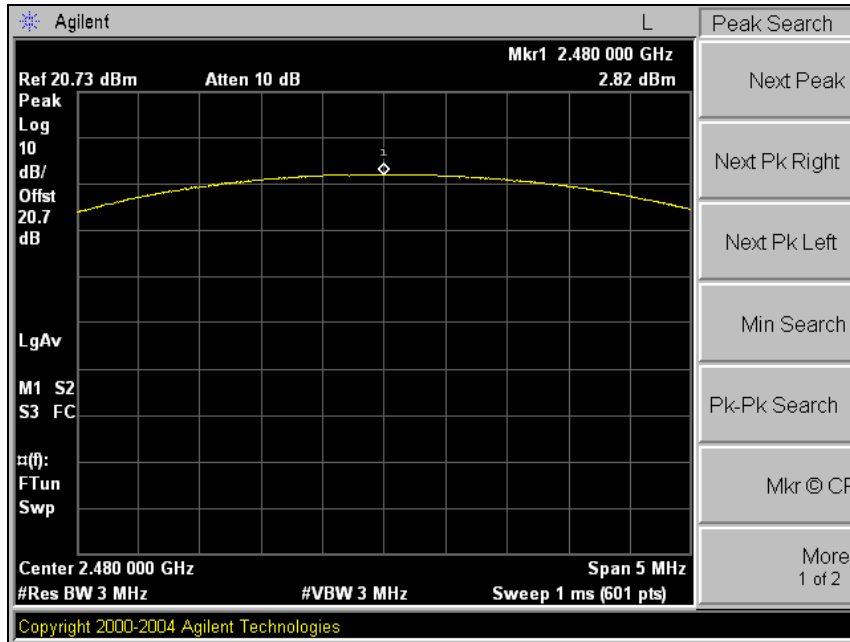

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

8. Hopping channel separation

8.1. Test setup

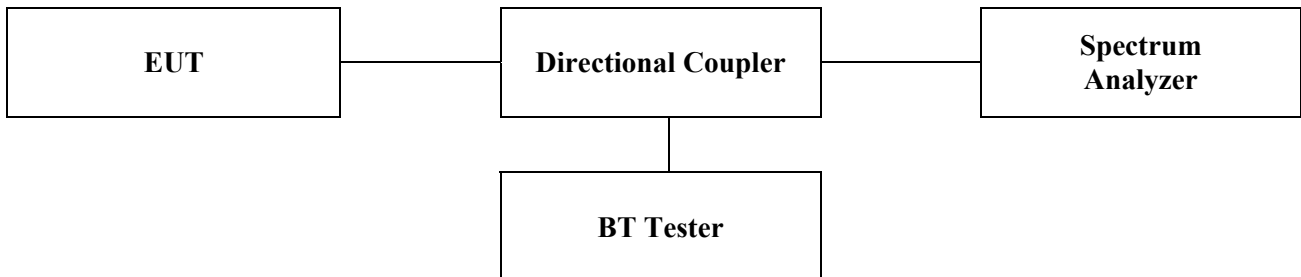

8.2. Limit

§15.247(a)(1) Frequency hopping system operating in 2400-2483.5MHz. Band may have hopping channel carrier frequencies that are separated by 25kHz or two-third of 20dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125mW.

8.3. Test procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in test setup without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range.
3. By using the MaxHold function record the separation of adjacent channels.
4. Measure the frequency difference of these two adjacent channels by spectrum analyzer MARK function. And then plot the result on spectrum analyzer screen.
5. Repeat above procedures until all frequencies measured were complete.
6. Set center frequency of spectrum analyzer = middle of hopping channel.
7. Set the spectrum analyzer as RBW=100 kHz, VBW=100 kHz, Span=5 MHz and Sweep = auto.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

8.4. Test result

Ambient temperature : 24 °C
 Relative humidity : 46 % R.H.


Operation Mode	Channel (Middle)	Adjacent Hopping Channel Separation (kHz)	Two-third of 20 dB Bandwidth (kHz)	Minimum Bandwidth (kHz)
GFSK	2441 MHz	1000	582	25
8DPSK	2441 MHz	1000	805	25

■ Note


20 dB bandwidth measurement, the measured channel separation should be greater than two-third of 20dB bandwidth or Minimum bandwidth.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Operating mode: GFSK

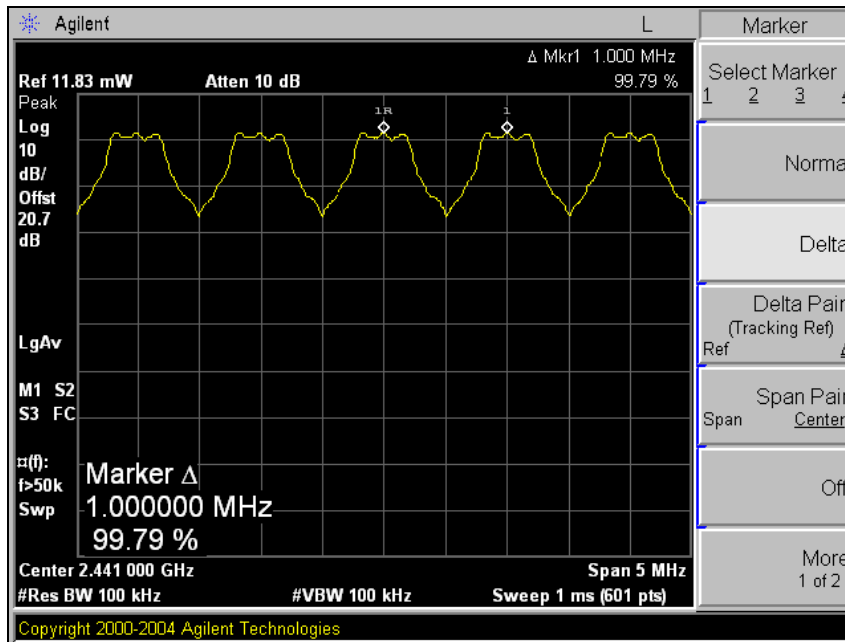


Operating mode: 8DPSK

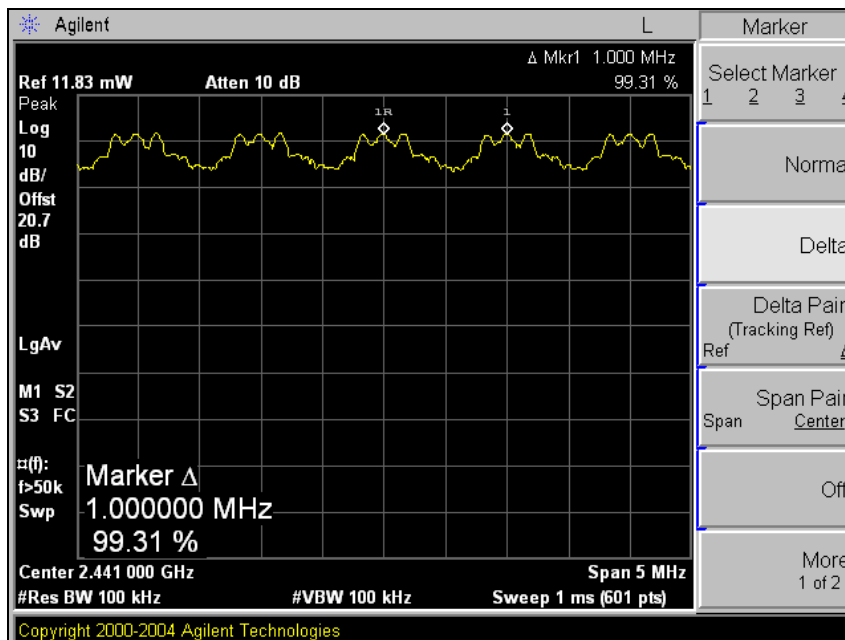

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

9. Number of hopping frequency

9.1. Test setup

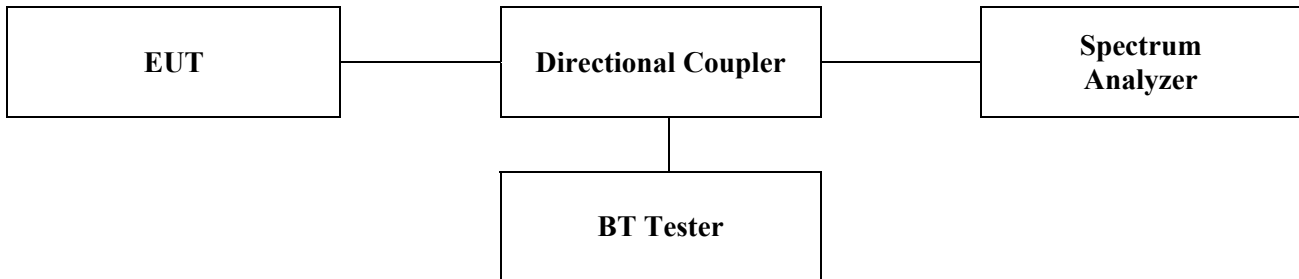

9.2. Limit

§15.247(a)(1)(iii) For frequency hopping system operating in the 2400-2483.5MHz bands shall use at least 15 hopping frequencies.

9.3. Test procedure

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna the port to the Spectrum analyzer
3. Set spectrum analyzer Start=2400 MHz, Stop=2441.5 MHz, Sweep=auto and Start=2441.5 MHz, Stop=2483.5 MHz, Sweep=auto.
4. Set the spectrum analyzer as RBW, VBW=300 kHz.
5. Max hold, view and count how many channel in the band.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.



9.4. Test result

Ambient temperature : 24 °C
 Relative humidity : 46 % R.H.

Operation mode	Number of hopping frequency	Limit
GFSK	79	≥ 15
8DPSK	79	≥ 15



The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Operating Mode: GFSK

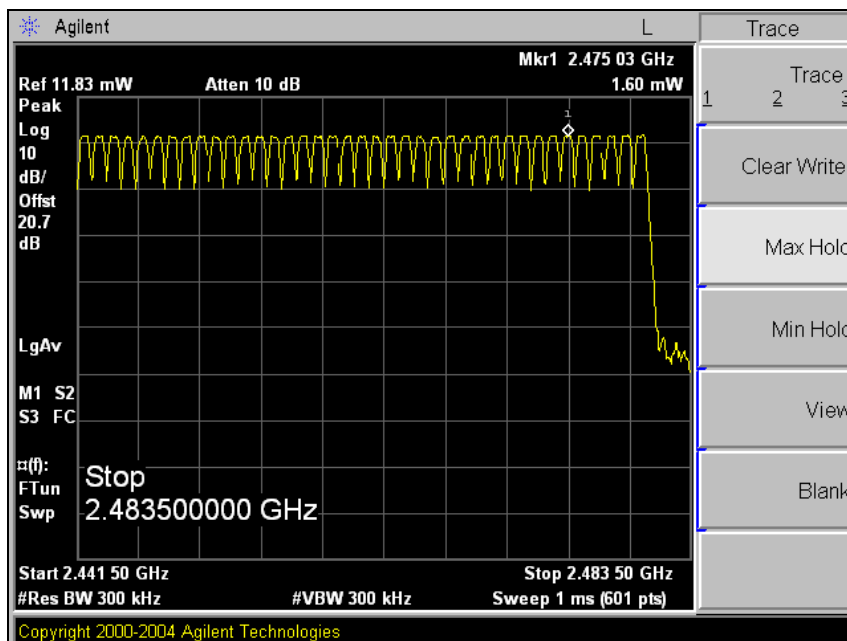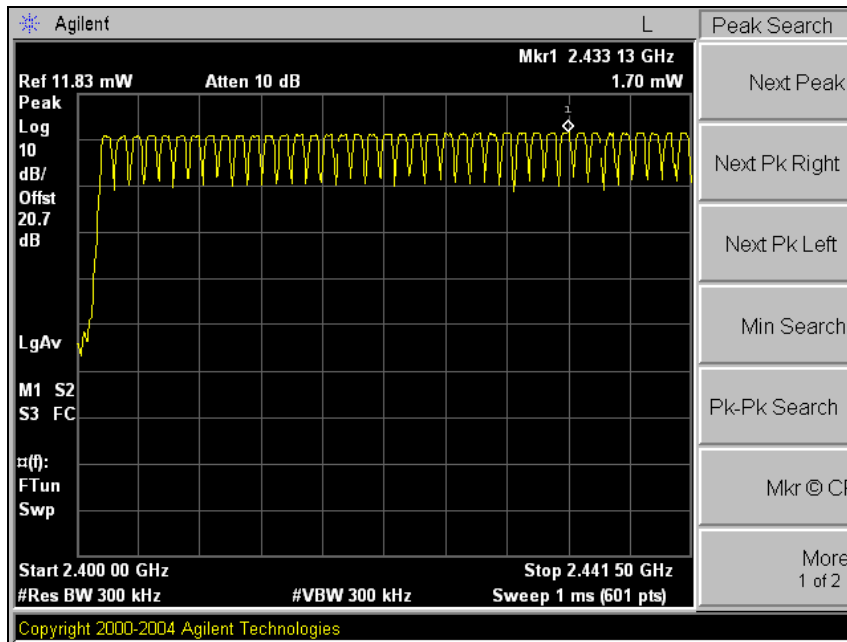

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


Operating Mode: 8DPSK

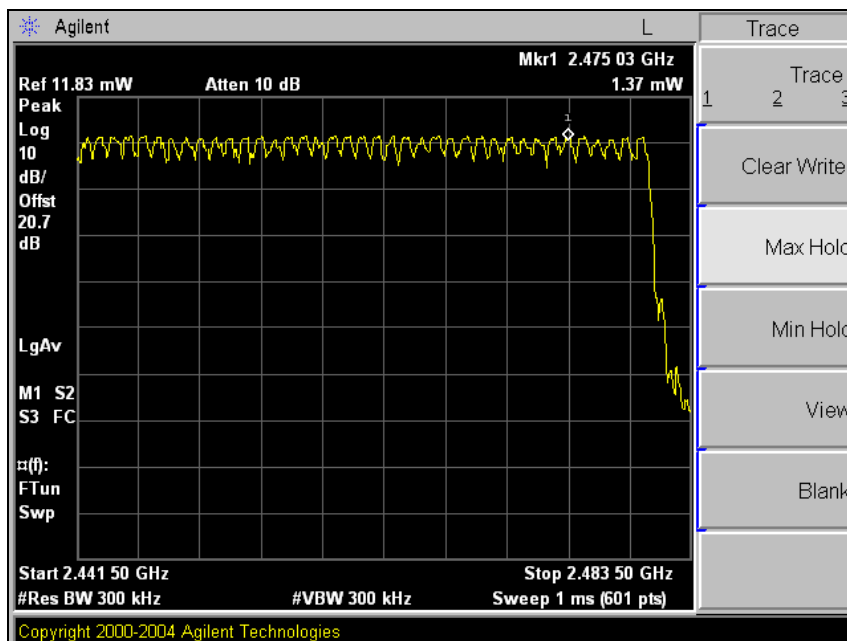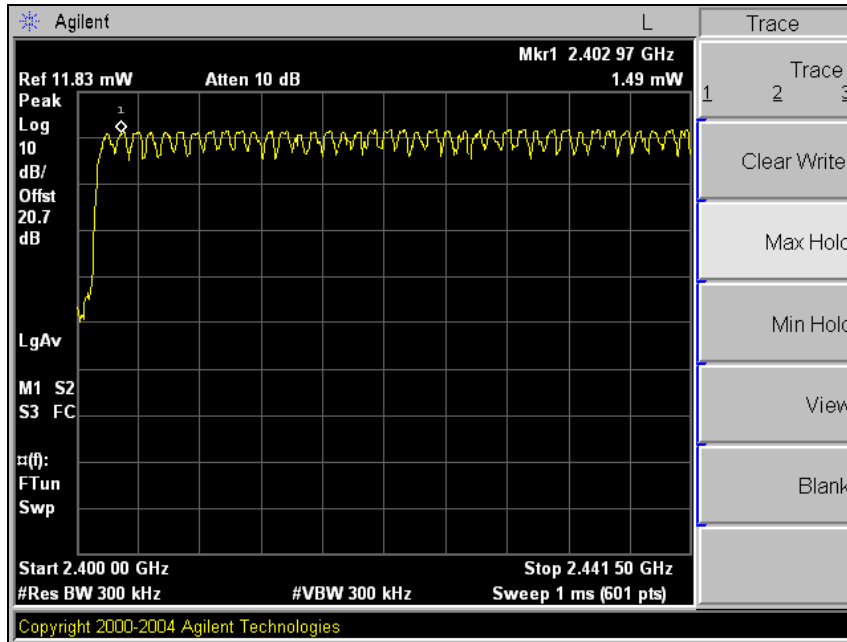

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

10. Time of occupancy (Dwell time)

10.1. Test setup

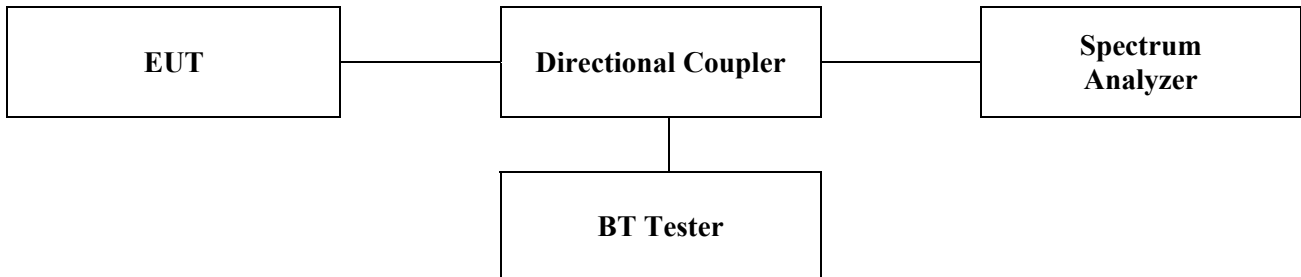

10.2. Limit

§15.247(a)(1)(iii) For frequency hopping system operating in the 2400-2483.5MHz band, the average time of occupancy on any frequency shall not be greater than 0.4 second within a 31.6 second period.

A period time=0.4(s) × 79 = 31.6(s)

10.3. Test procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in test setup without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable.
3. Adjust the center frequency of spectrum analyzer on any frequency be measured and set spectrum analyzer to zero span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
4. Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.
5. Repeat above procedures until all frequencies measured were complete.
6. The Bluetooth has 3 type of payload, DH1, DH3, DH5 and 3-DH1, 3-DH3,3-DH5. The hopping rate is 1600 per second.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

10.4. Test result

Ambient temperature : 24 °C
 Relative humidity : 46 % R.H.

Time of occupancy on the TX channel in 31.6sec
 = time domain slot length × (hop rate ÷ number of hop per channel) × 31.6

10.4.1. Operation mode : GFSK


Frequency	Packet type	Dwell time (ms)	Time of occupancy on the Tx channel in 31.6 sec (ms)	Limit for time of occupancy on the Tx channel in 31.6 sec (ms)
2441 MHz	DH1	0.390	124.80	400
2441 MHz	DH3	1.633	261.28	400
2441 MHz	DH5	2.867	305.81	400

DH1 Dwell time : 0.390 (ms) × [(1600÷2) ÷79] ×31.6(s) = 124.80 (ms)
 DH3 Dwell time : 1.633 (ms) × [(1600÷4) ÷79] ×31.6(s) = 261.28 (ms)
 DH5 Dwell time : 2.867 (ms) × [(1600÷6) ÷79] ×31.6(s) = 305.81 (ms)


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Operating mode :GFSK

DH1

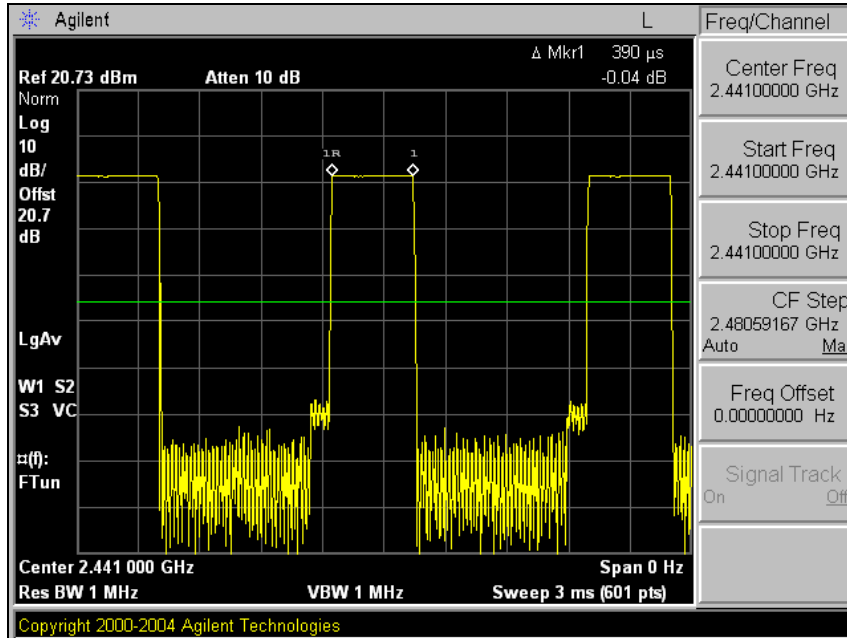


DH3

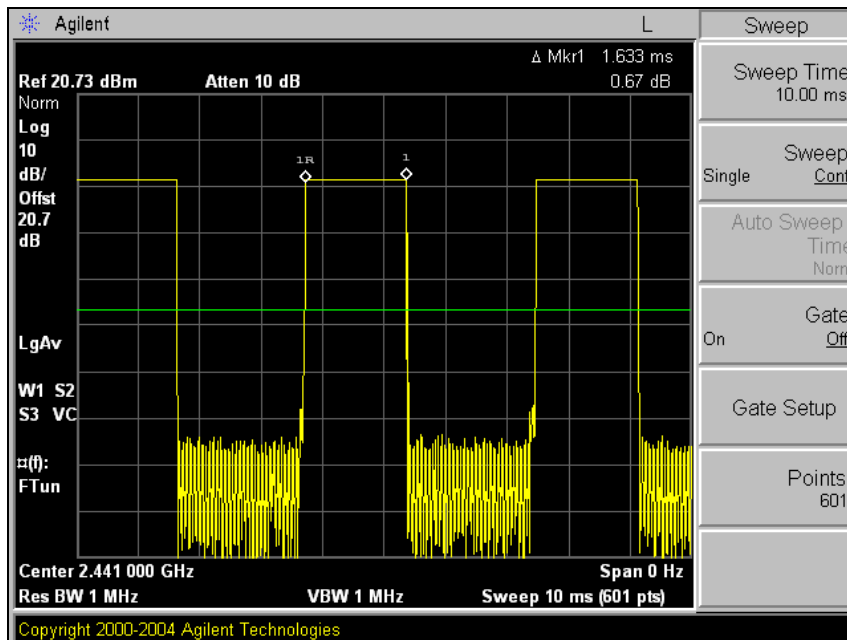

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

DH5

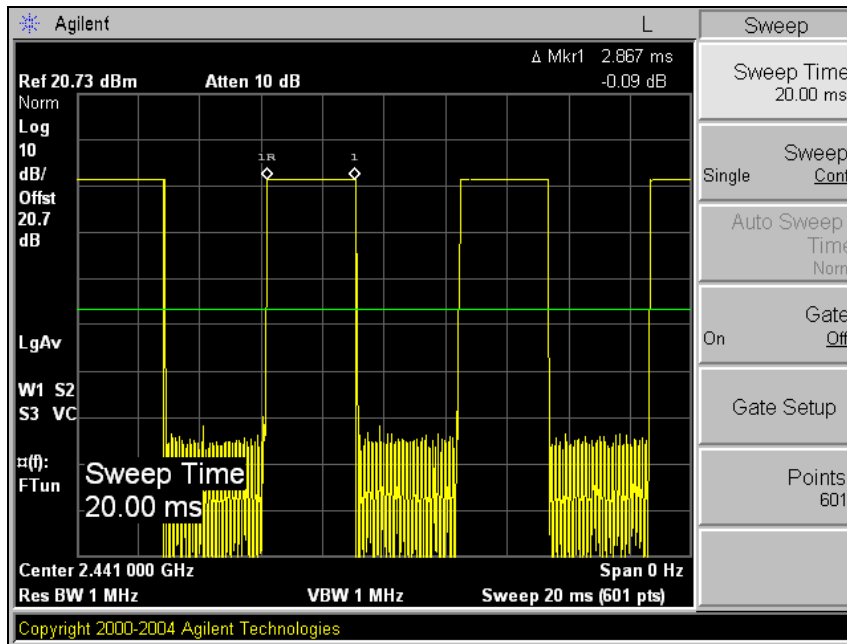

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

10.4.2. Operation mode: 8DPSK

Frequency	Packet type	Dwell time (ms)	Time of occupancy on the Tx channel in 31.6 sec (ms)	Limit for time of occupancy on the Tx channel in 31.6 sec (ms)
2441 MHz	3-DH1	0.410	131.20	400
2441 MHz	3-DH3	1.633	261.28	400
2441 MHz	3-DH5	2.867	305.81	400

3-DH1 Dwell time : 0.410 (ms) $\times [(1600 \div 2) \div 79] \times 31.6(s) = 131.20$ (ms)


3-DH3 Dwell time : 1.633 (ms) $\times [(1600 \div 4) \div 79] \times 31.6(s) = 261.28$ (ms)

3-DH5 Dwell time : 2.867 (ms) $\times [(1600 \div 6) \div 79] \times 31.6(s) = 305.81$ (ms)


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Operating mode:8DPSK

3-DH1

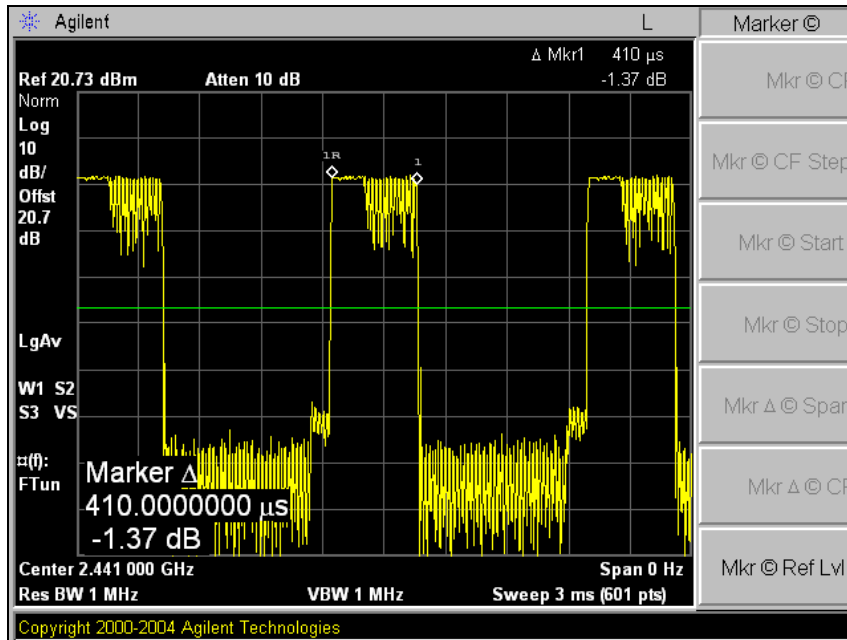


3-DH3

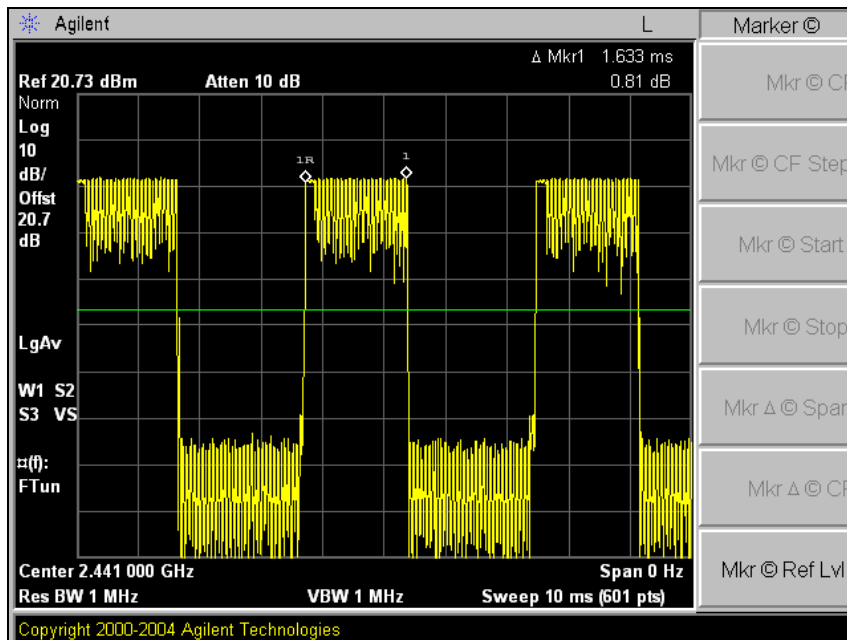

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


3-DH5

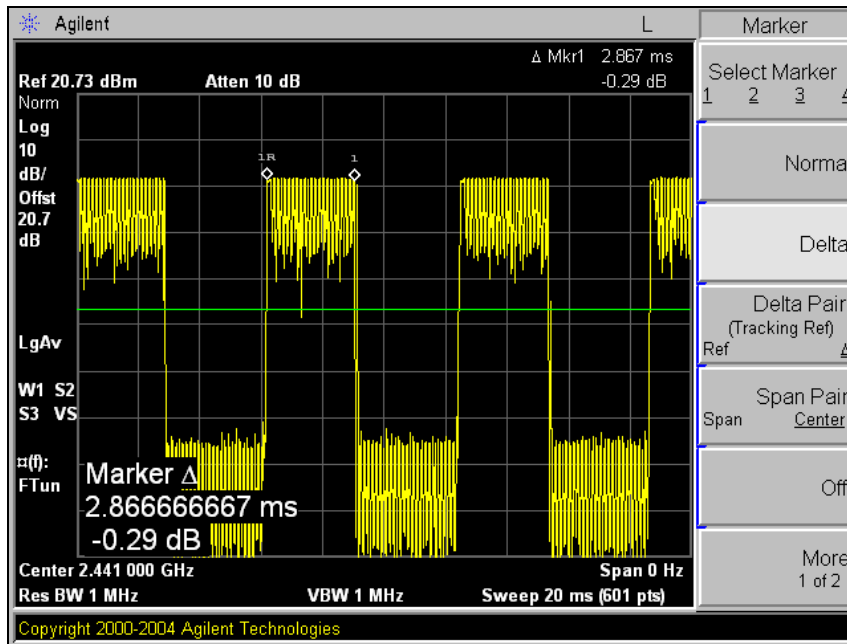

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

11. Power spectral density

11.1. Test setup

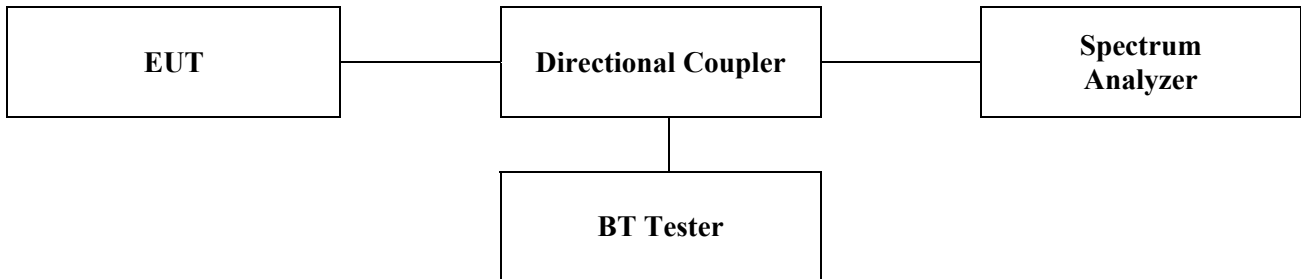

11.2. Limit

§15.247(e) For digitally modulated system, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

11.3. Test procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in test setup without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range.
3. By using the Max Hold function record the separation of adjacent channels.
4. Repeat above procedures until all frequencies measured were complete.
5. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using ;
RBW=3 kHz, VBW=10 kHz, Span=300 kHz and Sweep=100 s.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

11.4. Test result


Ambient temperature : 24 °C
 Relative humidity : 46 % R.H.

Operation mode	Frequency	Final RF power level in 3 kHz BW (dBm)	Maximum limit (dBm)
GFSK	2402 MHz	-11.18	8
	2441 MHz	-10.60	8
	2480 MHz	-10.67	8
8DPSK	2402 MHz	-11.23	8
	2441 MHz	-10.93	8
	2480 MHz	-11.42	8


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Operating mode :GFSK

Low channel

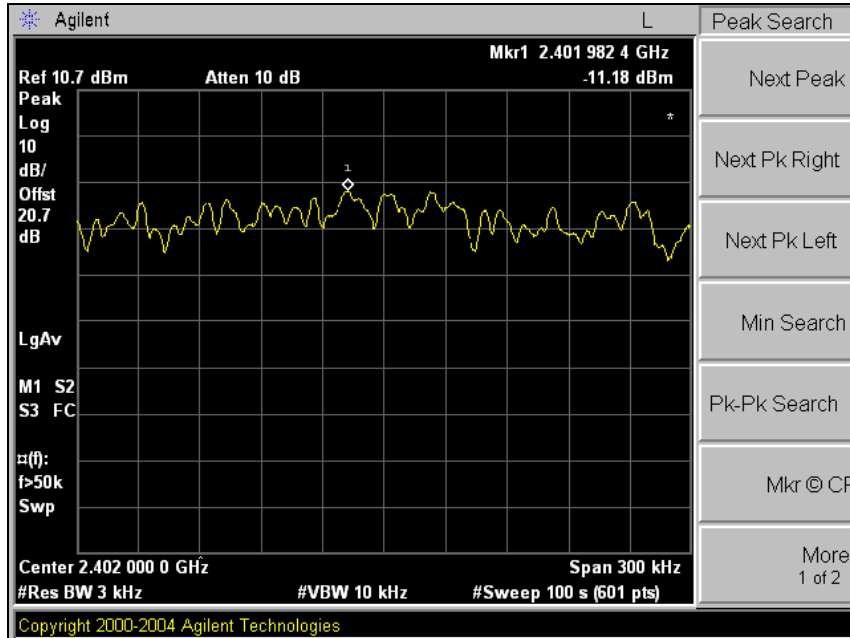


Middle channel

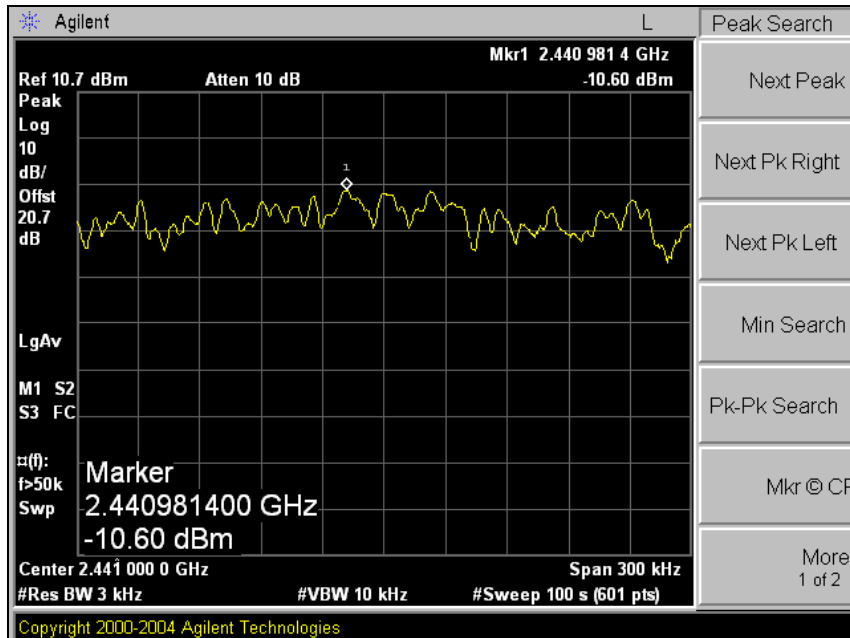

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


High channel

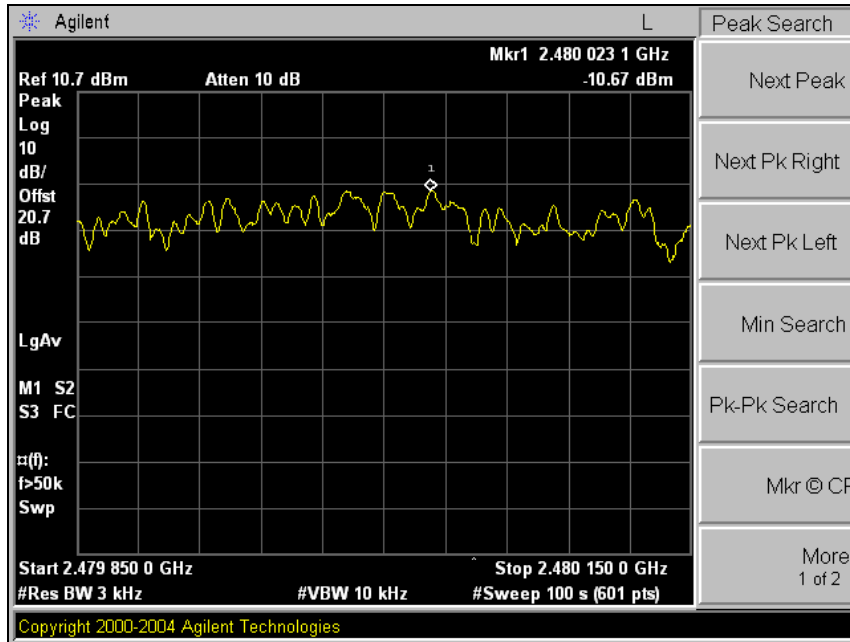


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Operating mode: 8DPSK

Low channel

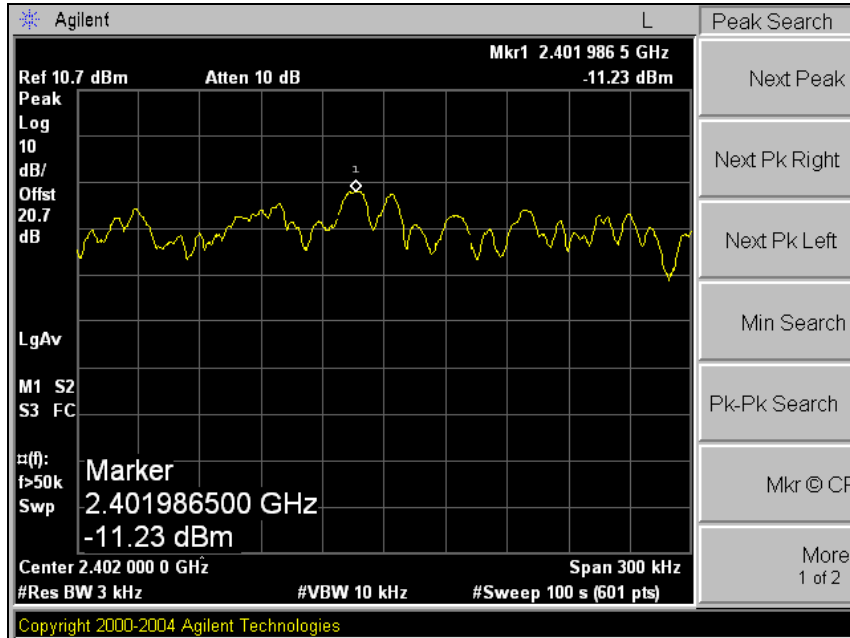


Middle channel

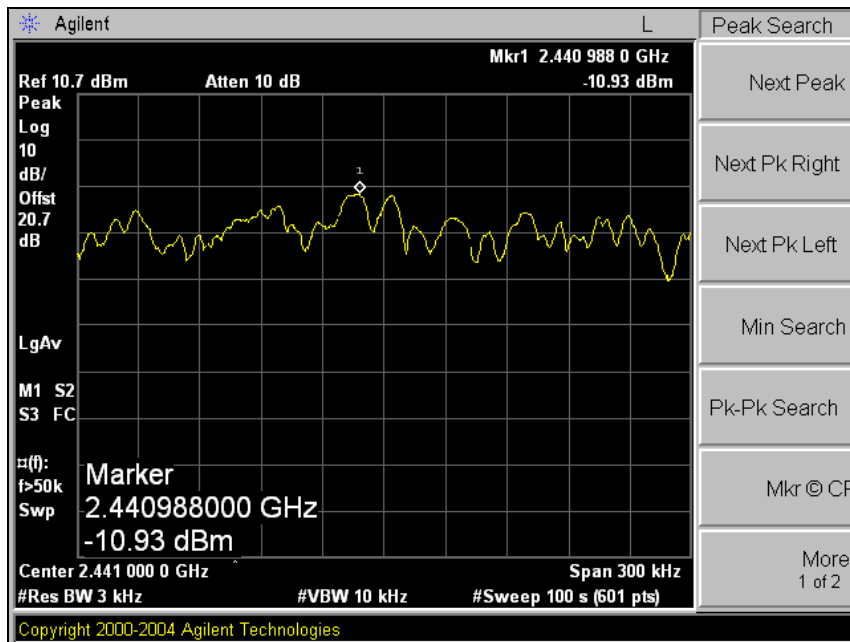

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

High channel

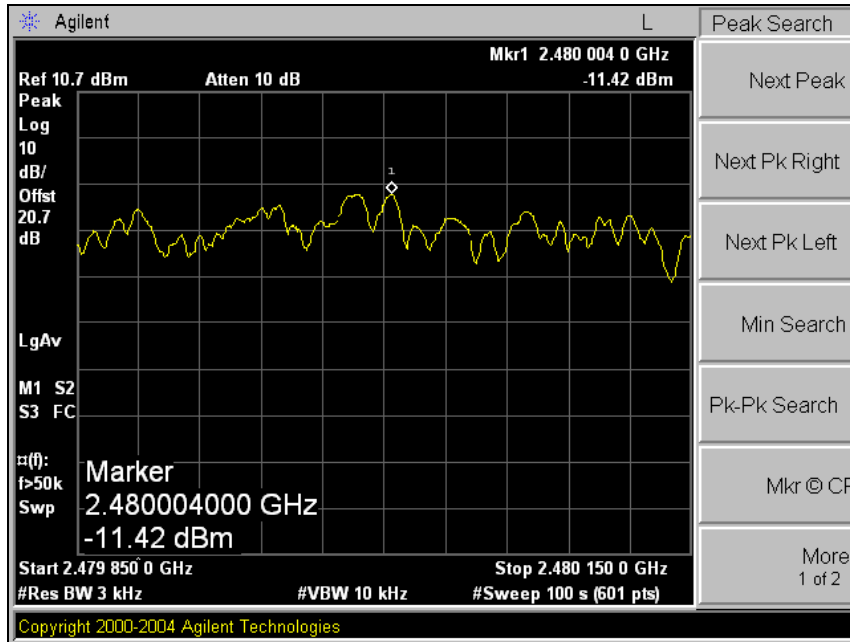

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

12. Antenna requirement

12.1. Standard applicable

For intentional device, according to FCC 47 CFR Section §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section §15.247 (b) if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the gain of the antenna exceeds 6dBi.

12.2. Antenna connected construction

The antenna used of this product is Monopole antenna.
The peak max gain of this antenna is -0.66 dBi

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

13. RF exposure evaluation

According to FCC 1.1310 : The criteria listed in the following table shall be used to evaluate the environment impact of human exposure to radio frequency (RF) radiation as specified in § 1.1307(b)

Limits for Maximum Permissible Exposure (MPE)

Frequency range (MHz)	Electric field strength(V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Average time
(A) Limits for Occupational /Control Exposures				
300 – 1500	--	--	F/300	6
1500 - 100000	--	--	5	6
(B) Limits for General Population/Uncontrol Exposures				
300 – 1500	--	--	F/1500	6
<u>1500 - 100000</u>	--	--	<u>1</u>	<u>30</u>

13.1 Friis transmission formula : $P_d = (P_{out} * G) / (4 * \pi * R^2)$

Where

P_d = power density in mW/cm²

P_{out} = output power to antenna in mW

G = gain of antenna in linear scale

π = 3.1416

R = distance between observation point and center of the radiator in cm

P_d the limit of MPE, 1 mW/cm². If we know the maximum gain of the antenna and the total power input to the antenna, through the calculation, we will know the distance where the MPE limit is reached.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

13.1 Test result of RF exposure evaluation

Test Item : RF Exposure evaluation data

Test Mode : Normal operation

13.1.1 Output power into antenna & RF exposure evaluation distance

Operating mode	Channel	Frequency (MHz)	Peak output power (dBm)	Antenna gain (dBi)	Power density at 20cm (mW/cm ²)	Limit (mW/cm ²)
GFSK	Low	2402	1.56	-0.66	0.00024	1
	Middle	2441	2.26	-0.66	0.00029	
	High	2480	2.33	-0.66	0.00029	
8DPSK	Low	2402	2.71	-0.66	0.00032	1
	Middle	2441	3.10	-0.66	0.00035	
	High	2480	2.82	-0.66	0.00033	

■ Note

The power density Pd (4th column) at a distance of 20cm calculated from the friis transmission formula is far below the limit of 1 mW/ cm².