

# Nemko Korea CO., Ltd.

300-2, Osan-Ri, Mohyun-Myun, Yongin-City, Kyungki-Do, KOREA

TEL:+82 31 322 2333

FAX:+82 31 322 2332

## FCC EVALUATION REPORT FOR CERTIFICATION

**Applicant :**

Samsung Electronics Co., Ltd.

Suwon P.O.Box 105, 416, Maetan3-dong, Paldal-gu

Suwon-si, Kyunggi-do, Korea, (Post code : 442-742)

Attn. : Mr. Hagyouon Bae

Dates of Issue : November 24, 2003

Test Report No. : NK2DE657

Test Site : Nemko Korea Co., Ltd.

EMC site, Korea

FCC ID

**A3LWIP5000M**

Brand Name

**SAMSUNG**

CONTACT PERSON

**Samsung Electronics Co., Ltd.**  
**Suwon P.O.Box 105,416, Maetan3-dong, Paldal-gu,**  
**Suwon-shi, Kyunggi-do, Korea , 442-742.**  
**Mr. Hagyouon Bae**  
**Telephone No. : +82 31 279 4387**

Applied Standard:

FCC 47 CFR Part 15, Subpart C : 2000

Classification :

FCC Class B Device

EUT Type:

WLAN Phone

The device bearing the brand name and FCC ID specified above has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4-1992.

I attest to the accuracy of data and all measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



**Tested By : S. H. Baek**  
**Senior Engineer**



**Reviewed By : H.H. Kim**  
**Manager & Chief Engineer**

## ***TABLE OF CONTENTS***

---

<b>SCOPE</b>	<b>3</b>
<b>INTRODUCTION (Site Description)</b>	<b>4</b>
<b>TEST CONDITIONS &amp; EUT INFORMATION</b>	<b>5</b>
<b>SUMMARY OF TEST RESULTS</b>	<b>7</b>
<b>RECOMMENDATION / CONCLUSION</b>	<b>7</b>
<b>SAMPLE CALCULATION</b>	<b>7</b>
<b>DESCRIPTION OF TEST</b>	<b>8</b>
<b>TEST DATA(Conducted Emissions)</b>	<b>12</b>
<b>PLOT OF EMISSION</b>	<b>13</b>
<b>TEST DATA (Radiated Emissions)</b>	<b>15</b>
<b>TEST DATA(Modulated Bandwidth)</b>	<b>16</b>
<b>PLOT OF TEST DATA</b>	<b>17</b>
<b>TEST DATA(Peak Power Output)</b>	<b>19</b>
<b>TEST DATA(Conducted &amp; Radiated Spurious Emission)</b>	<b>20</b>
<b>PLOT OF TEST DATA</b>	<b>21</b>
<b>TEST DATA(Peak Power Spectral Density)</b>	<b>42</b>
<b>PLOT OF TEST DATA</b>	<b>43</b>
<b>ACCURACY OF MEASUREMENT</b>	<b>45</b>
<b>TEST EQUIPMENT</b>	<b>46</b>
<b>APPENDIX A - LABELLING REQUIREMENTS</b>	<b>47</b>
<b>APPENDIX B - CIRCUIT DIAGRAM</b>	<b>48</b>
<b>APPENDIX C - PHOTOGRAPHS OF TEST SET-UP</b>	<b>49</b>
<b>APPENDIX D - EUT PHOTOGRAPHS</b>	<b>53</b>
<b>APPENDIX E - USER'S MANUAL</b>	<b>66</b>
<b>APPENDIX F - SCHEMATIC DIAGRAM</b>	<b>67</b>
<b>APPENDIX G – OPERATING DESCRIPTION</b>	<b>68</b>

## SCOPE

---

Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission under FCC part 15.

<b>Responsible Party* :</b>	Samsung Electronics Co., Ltd.
<b>Contact Person :</b>	Mr. Hagyouon Bae
<b>Manufacturer :</b>	1. B·M Telecom 195-4 B/L Ochang Science Industry Complex, Ochang-Myeon, Chungwon-Gun, Chungcheongbuk-Do, Korea

- FCC ID: A3LWIP5000M
- Model: WIP-5000M
- Brand Name: SAMSUNG
- EUT Type: WLAN Phone
  
- Classification: FCC Class B
- Applied Standard: FCC 47 CFR Part 15 , Subpart C
- Test Procedure(s): ANSI C63.4 (1992)
- Dates of Test: October 20, 2003 to October 30, 2003
- Place of Tests: Nemko Korea Co., Ltd. EMC Site
- Test Report No.: NK2DE657

## INTRODUCTION

The measurement procedure described in American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40GHz (ANSI C63.4-1992) was used in determining radiated and conducted emissions emanating from **Samsung Electronics Co., Ltd.**

FCC ID : **A3LWIP5000M**

These measurement tests were conducted at **Nemko Korea Co., Ltd. EMC Laboratory** .

The site address is 300-2, Osan-Ri, Mohyun-Myun, Yongin-City, Kyungki-Do, KOREA

The area of Nemko Korea Corporation LTD. EMC Test Site is located in a mountain area at 80 kilometers (48 miles) southeast and Incheon International Airport (Incheon Airport), 30 kilometers (18miles) south-southeast from central Seoul.

It is located in the valley surrounded by mountains in all directions where ambient radio signal conditions are quiet and a favorable area to measure the radio frequency interference on open field test site for the computing and ISM devices manufactures.

The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4 on October 19, 1992.



Nemko Korea Co., Ltd.  
EMC Lab.  
300-2, Osan-Ri, Mohyun-Myun, Yongin-City Kyungki-Do, KOREA 449-852  
Tel)+82-31-322-2333  
Fax)+82-31-322-2332

Fig. 1. The map above shows the Seoul in Korea vicinity area.

The map also shows Nemko Korea Corporation Ltd. EMC Lab. and Incheon Airport.

## TEST CONDITIONS & EUT INFORMATION

---

### Operating During Test

Sending and receiving a voice data from a WLAN Phone with WLAN card via Radio link to the WBS24.  
The eut was connected to a mobile phone according to manufacturer's specifications and tested at charging mode.

### Support Equipment

WLAN Phone	Samsung Model: WIP-5000M	S/N: N/A
Desktop charger	R.F.Tec Model: WIP-5000M 2.0m unshielded AC power cable	S/N: N/A
WBS24(Basic)	Samsung Model: WBS24(Basic) 1.8m unshielded DC power cable 3.0m RJ-45 twisted pair cable	S/N: N/A
AC Adapter	Dae Van Electronics Co.,Ltd. Model: DSA-0101F-05 1.8m unshielded DC power cable	
WBS24(Combo)	Samsung Model:WBS24(Combo) 3.0m RJ-45 twisted pair cable	S/N: N/A
VoIP phone	Samsung Model:LCD24BKEYSETDCO	23J549281
IDCS500Key Telephone System	Samsung Model: Idcs500 2.0m unshielded AC power cord 3.0m RJ-45 twisted pair cable	S/N: SG74T1C206
Hub	3Com Corporation Model:3C16794 1.8m unshielded DC power cable 13.0m RJ-45 twisted pair cable	S/N: YED20300268
AC Adapter	Autl Inc. Model:3C16742A 1.8m unshielded DC power cable	S/N: N/A

## EUT Information

Clock:	44MHz(Y1), 10MHz(X1)
Chipset:	U17(ISL3871K), U34(AM39LV010B), U23(EM128L16B) U16(ISL3984), U18(ISL3684), U19(ISL3084) U32(AUDACITY_T2U), U15(M29W160DT) U22(EXD128), U1(TWLL1103)
RF frequency	2412 ~ 2462GHz
RF output power	Maximum of 13dBm
Transmission Protocols	DSSS(Direct Sequence Spread Spectrum)
Voice Codec	G711/G729A/G723.1
Size	125(width)x45(length)x24(height)mm
Weight	About95g
Battery	3.8V Li-Ion/800mA

## SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specification:

Name of Test	Paragraph No.	Result	Remark
Power line Conducted Emission	15.207	Complies	
Radiated Emission( Spurious )	15.209	Complies	
Modulated Bandwidth (6dB Bandwidth)	15.247(a)(2)	Complies	
Peak Power Output	15.247(b)	Complies	
Conducted Spurious Emission	15.247(c)	Complies	
Radiated Spurious Emission	15.247(c)	Complies	
Power Spectral Density	15.247(d)	Complies	

## RECOMMENDATION/CONCLUSION

The data collected shows that the **Samsung Electronics Co., Ltd.**

FCC ID : **A3LWIP5000M**

The highest emission observed was at **31.00MHz** for radiated emissions with a margin of **20.5 dB**.

## SAMPLE CALCULATION

$$\text{dB}\mu\text{V} = 20 \log_{10} (\mu\text{V}/\text{m})$$

$$\mu\text{V} = 10^{(\text{dB}\mu\text{V}/20)}$$

### EX. 1.

@57.7 MHz

Class B limit = 100  $\mu\text{V}/\text{m}$  = 40.0 dB  $\mu\text{V}/\text{m}$

Reading = 19.1 dB  $\mu\text{V}$ (calibrated level)

Antenna factor + Cable Loss = 10.12 dB

Total = 29.22 dB  $\mu\text{V}/\text{m}$

Margin = 40.0 - 29.22 = 10.78

10.78 dB below the limit

## DESCRIPTION OF TESTS

### Conducted Emissions

The Line conducted emission test facility is located inside a 4 X 7 X 2.5 meter shielded enclosure.

It is manufactured by EM engineering. The shielding effectiveness of the shielded room is in accordance with MIL-STD-285 or NSA 65-6.

A 1mX 1.5M wooden table 0.8m height is placed 0.4m away from the vertical wall and 1.5m away from the side of wall of the shielded room

Rohde & Schwarz LISN and Kyoritsu KNW-407 50ohm/50uH line impedance stabilization network are bonded to the shielded room.

The EUT is powered from the Rohde & Schwarz LISN and the support equipment is powered from the Kyoritsu LISN. Power to the LISN s are filtered by high-current high insertion loss Power line filters. The purpose of filter is to attenuate ambient signal interference and this filter is also bonded to shielded enclosure. All electrical cables are shielded by tinned copper zipper tubing with inner diameter of 1/2".

If DC power device, power will be derived from the source power supply it normally will be powered from and this supply lines will be connected to the LISNs,

All interconnecting cables more than 1 meter were shortened by non inductive bundling (serpentine fashion) to a 1 meter length.

Sufficient time for EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer to determine the frequency producing the maximum EME from the EUT. The spectrum was scanned from 150KHz to 30MHz with 200msec sweep time.

The frequency producing the maximum level was re-examined using the EMI test receiver. (Rohde & Schwarz, ESCS30).

The detector function was set to CISPR quasi-peak mode and average mode.

The bandwidth of receiver was set to 9KHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each EME emission.

Each emission was maximized by; switching power lines; varying the mode of operation or resolution; clock or data exchange speed; scrolling H pattern to the EUT and of support equipment, and powering the monitor from the floor mounted outlet box and computer aux AC outlet, if applicable; which ever determined the worst case emission.

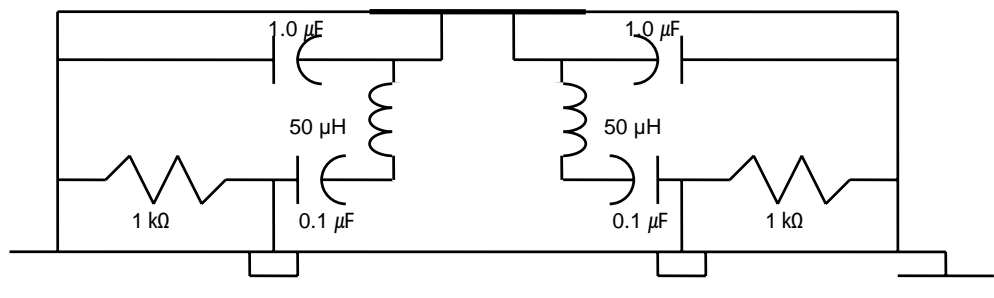


Fig. 2. LISN Schematic Diagram

## DESCRIPTION OF TEST

### Radiated Emissions

Preliminary measurements were made indoors at 3 meter using broad band antennas, broadband amplifier, and spectrum analyzer to determine the frequency producing the maximum EME. Appropriate precaution was taken to ensure that all EME from the EUT were maximized and investigated. The Technology configuration, clock speed, mode of operation or video resolution, turntable azimuth with respect to the antenna was noted for each frequency found.

The spectrum was scanned from 30 to 1000MHz using Biconical log Antenna(ARA, LPB-2520/A). Above 1GHz, Horn antenna (Schwarzbeck BBHA 9120D:upto 18GHz) was used. Final Measurements were made outdoors at 3 or 10m test range using Logbicon Super Antenna(Schwarzbeck, VULB9166) or Horn antenna.( Schwarzbeck BBHA 9120D)

The test equipment was placed on a wooden table.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition.

Each frequency found during pre-scan measurements was reexamined and investigated using EMI test receiver.(ESCS30)

The detector function was set to CISPR quasi-peak mode or Average mode and the bandwidth of the receiver was set to 120KHz or 1MHz depending on the frequency or type of signal.

The half wave dipole antenna was tuned to the frequency found during preliminary radiated measurements.

The EUT support equipment and interconnecting cables were re configured to the setup producing the maximum emission for the frequency and were placed on top of a 0.8m high non- metallic 1.0X 1.5 meter table.

The EUT, support equipment and interconnecting cables were re-arranged and manipulated to maximize each EME emission.

The turn table containing the Technology was rotated; the antenna height was varied 1 to 4meter and stopped at the azimuth or height producing the maximum emission Each emission was maximized by : switching power lines; varying the mode of operation or resolution; clock or data exchange speed; scrolling H pattern to the EUT and of support equipment, and powering the monitor from the floor mounted outlet box and computer aux AC outlet, if applicable; which ever determined the worst case emission.

Each EME reported was calibrated using the R/S signal generator.

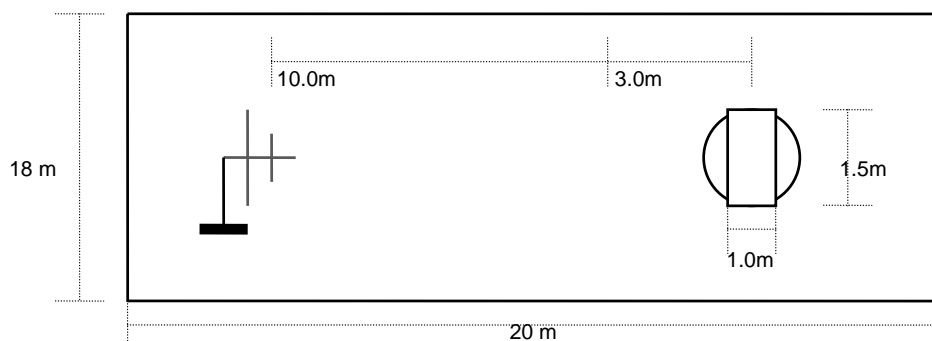



Fig. 2. Dimensions of Outdoor Test Site

## ***DESCRIPTION OF TEST***

---

### **Modulated Bandwidth (6dB Bandwidth)**

#### **Test Setup**

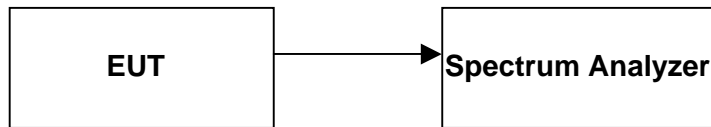


#### **Test Procedure**

The transmitter output is connected to the spectrum analyzer.  
The RBW of spectrum analyzer is set to 100KHz and VBW is set to the 100KHz.  
The sweep time is coupled.

### **Peak Power Output**

#### **Test Setup**

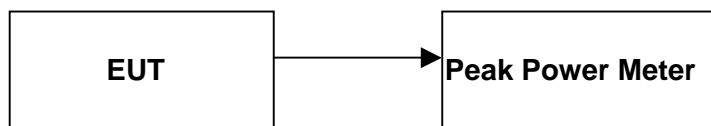

#### **Test Procedure**


The transmitter output is connected to the peak power meter.

## ***DESCRIPTION OF TEST***

---

### **Conducted Spurious Emission**

#### **Test Setup**

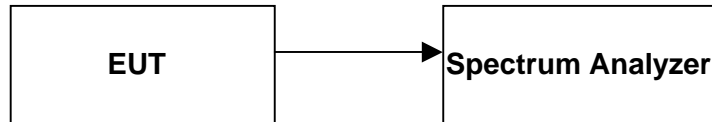


#### **Test Procedure**

The transmitter output is connected to the spectrum analyzer. The RBW of spectrum analyzer is set to 100KHz and VBW is set to the 100KHz. Measurements are made over the 30MHz to 26.5GHz range with the transmitter set to the lowest, middle, and highest channels within the 2.4GHz band.

### **Peak Power Spectral Density**

#### **Test Setup**

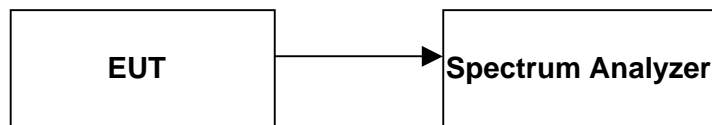


#### **Test Procedure**

The transmitter output is connected to the spectrum analyzer. The maximum level in a 3KHz bandwidth is measured with the spectrum analyzer. The RBW of spectrum analyzer is set to 3KHz and VBW is set to 10KHz. The sweep time is set to Span/3KHz and video averaging is turned off. The PPSD is the highest level found across the emission in any 3KHz band.




## PLOTS OF EMISSIONS

- Conducted Emission at the Mains port (Line)

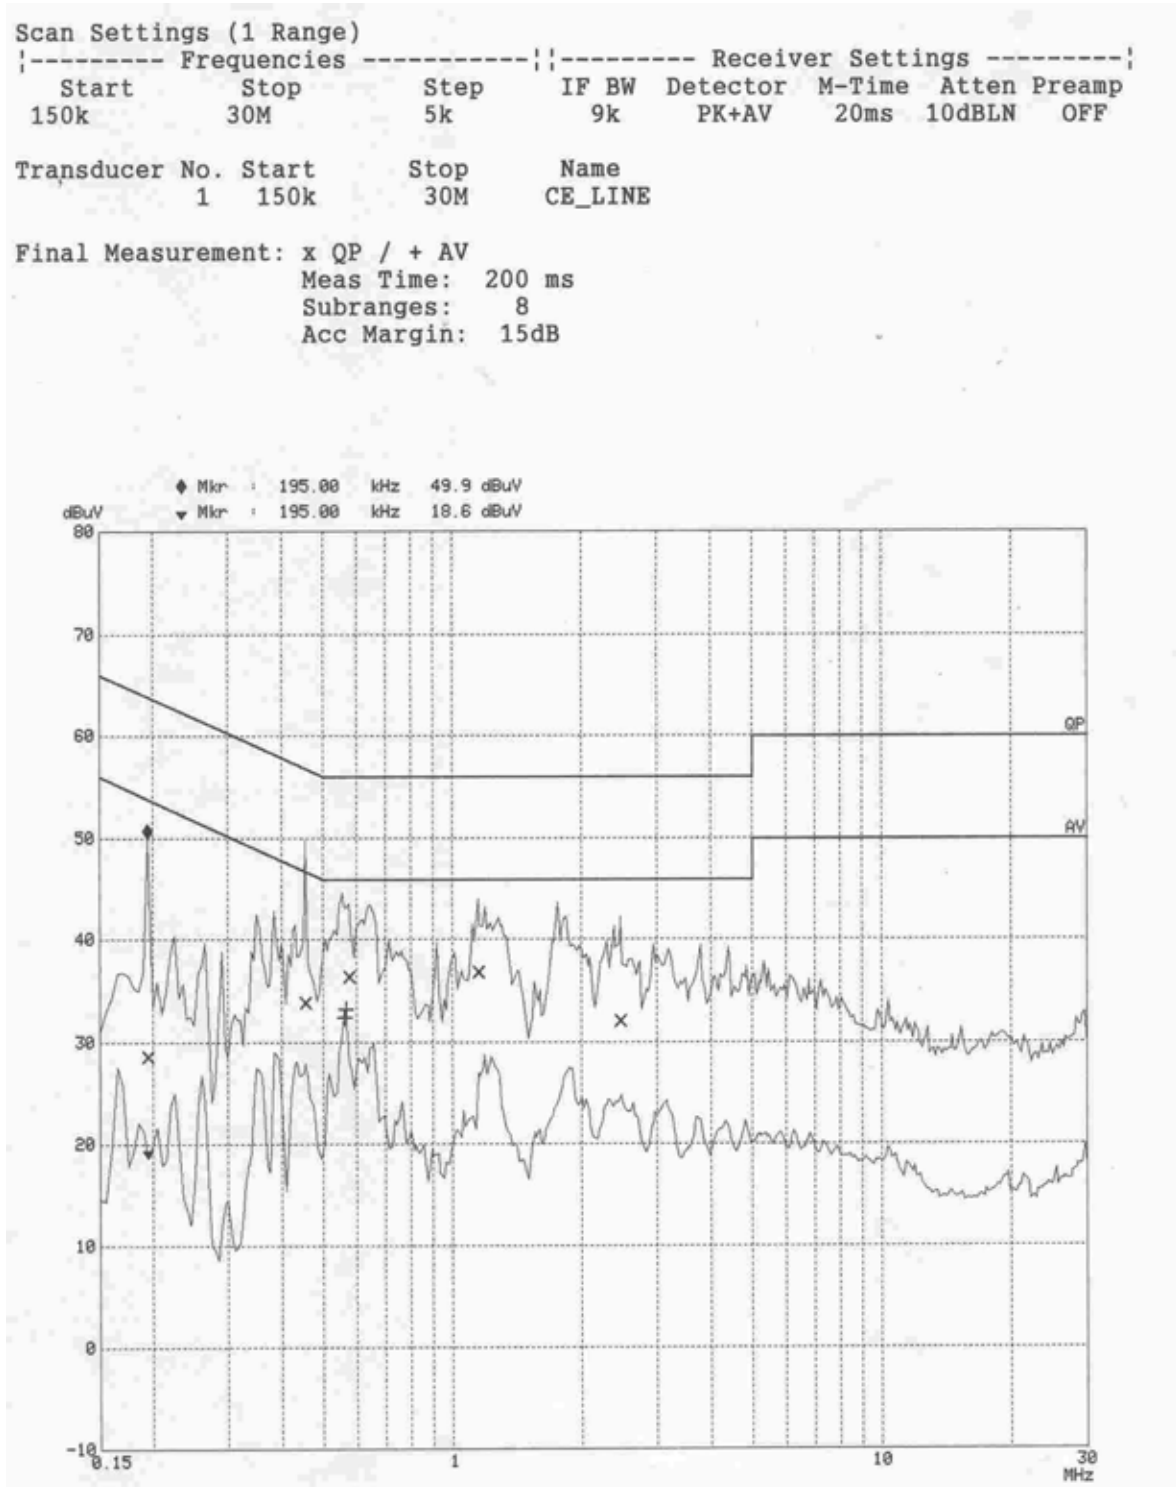

## PLOTS OF EMISSIONS

- Conducted Emission at the Mains port (Neutral)

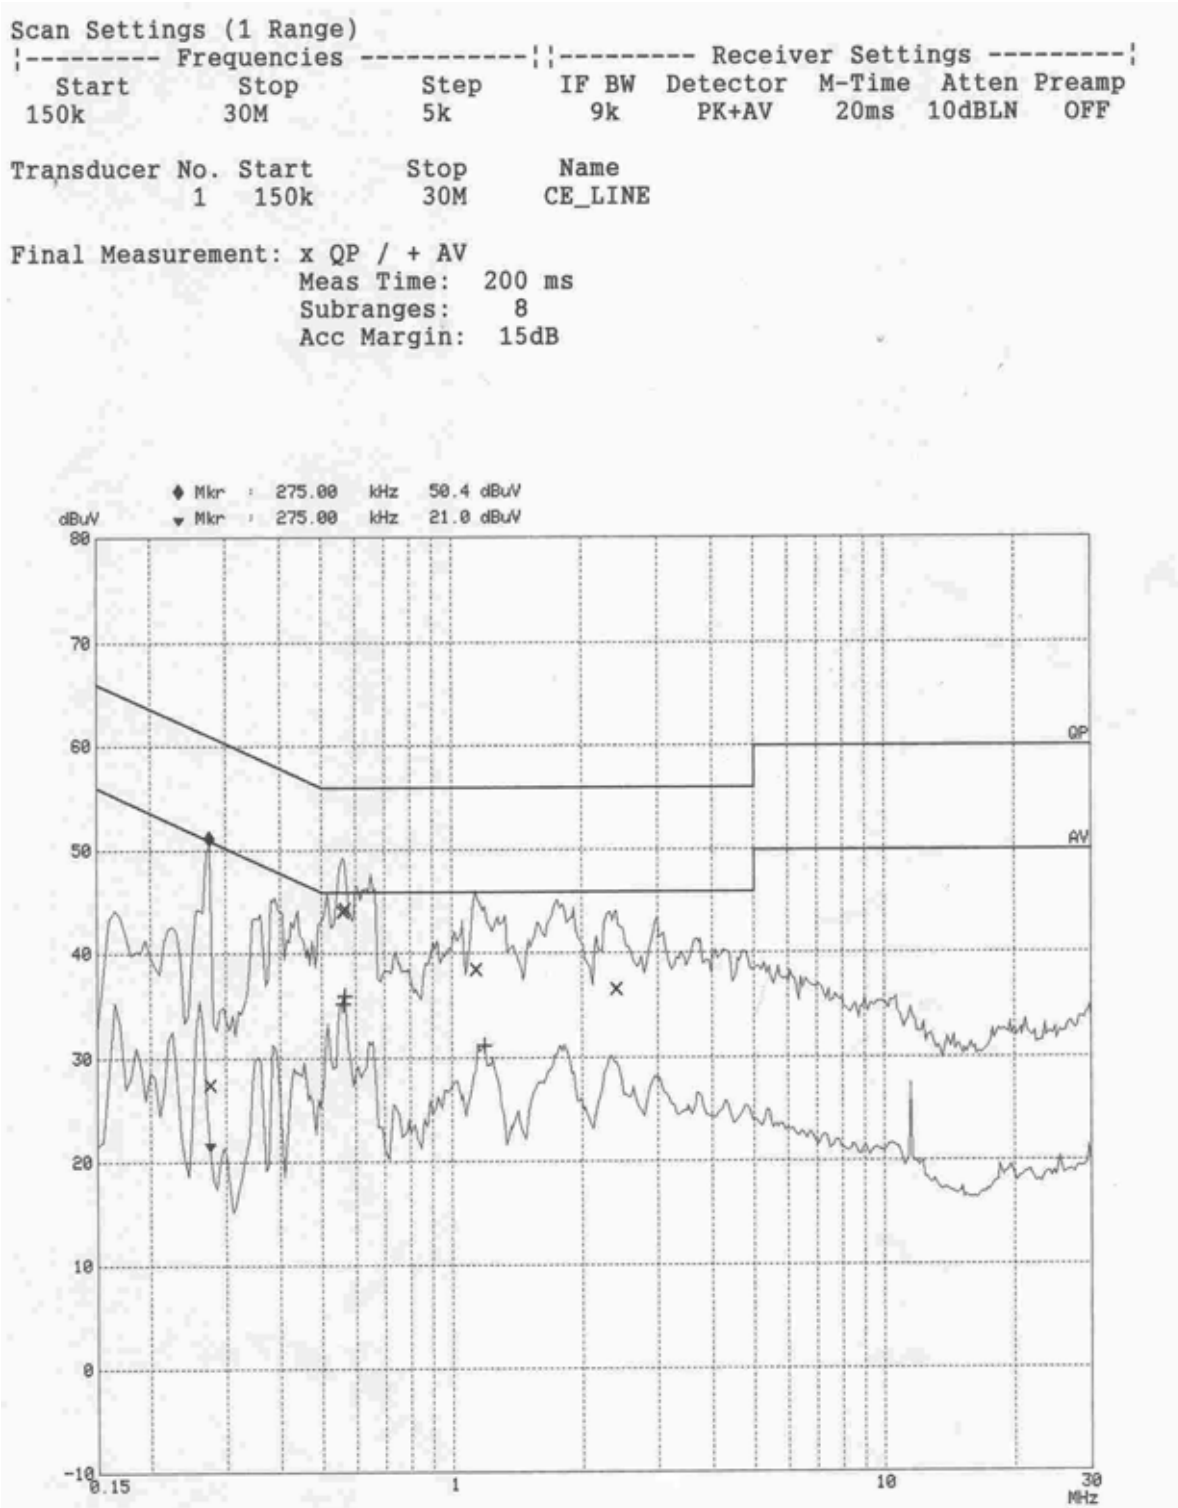

# TEST DATA

## Radiated Emissions(general requirements)-15.209

FCC ID : A3LWIP5000M

Test Mode :

The test data show the worst emission level from the three-azimuth

Frequency (MHz)	Reading (dB $\mu$ V)	Pol* (H/V)	AF+CL+Amp (dB)**	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
31.00	42.4	V	-22.9	19.5	40.0	20.5
61.13	33.1	V	-21.6	11.5	40.0	28.5
90.00	37.3	H	-19.0	18.3	43.5	25.2
131.16	31.1	H	-15.6	15.5	43.5	28.0
147.60	27.3	H	-13.0	14.3	43.5	29.2
238.70	29.2	H	-12.8	16.4	46.0	29.6

\* : Harmonics of the highest fundamental frequency.

**Table 1. Radiated Measurements at 3meters**

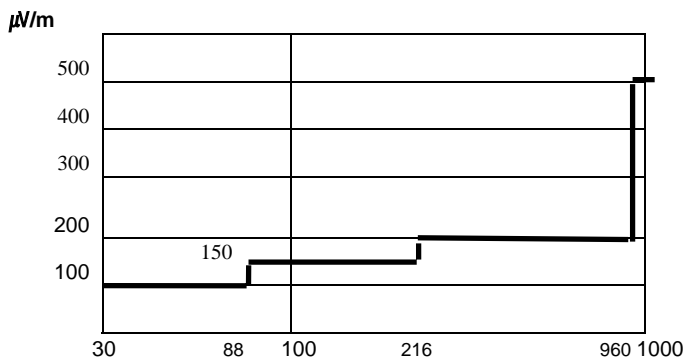


Fig. 3. Limits at 3 meters

**NOTES:**

1. All modes of operation were investigated the worst-case emission are reported.
2. The radiated limits are shown on Figure 3.

Above 1GHz the limit is 500  $\mu$ V/m.

**NOTES:**

1. \*Pol. H=Horizontal V=Vertical
2. \*\*AF+CL+Amp. = Antenna Factor + Cable Loss + Amplifier.
3. Up to the 10<sup>th</sup> harmonics were investigated according to § 15.33 and the worst –case is reported.

*Baek Sung-hyun*

Tested by **S. H. Baek**

## TEST DATA

---

### Modulated Bandwidth (6dB Bandwidth)-15.247(a)(2)

FCC ID : A3LWIP5000M

Test Mode : set to Lowest channel and Middle channel and Highest channel

Channel	Frequency (MHz)	Result (KHz)	Limit (KHz)	Margin (KHz)
1	2412	9840	500	9340
6	2437	10920	500	10420
11	2462	9880	500	9380




---


Tested by **S. H. Baek**

### PLOT OF TEST DATA

6dB Bandwidth, Low Channel (2412MHz)

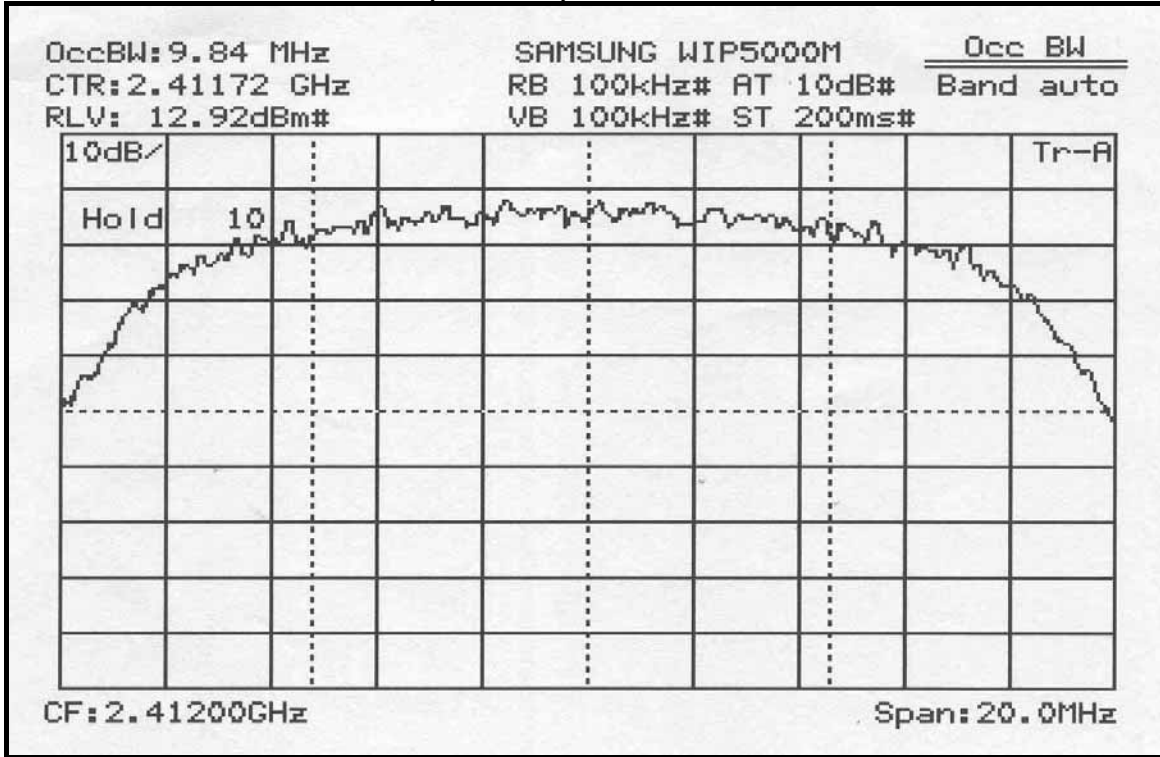


6dB Bandwidth, Middle Channel (2437MHz)

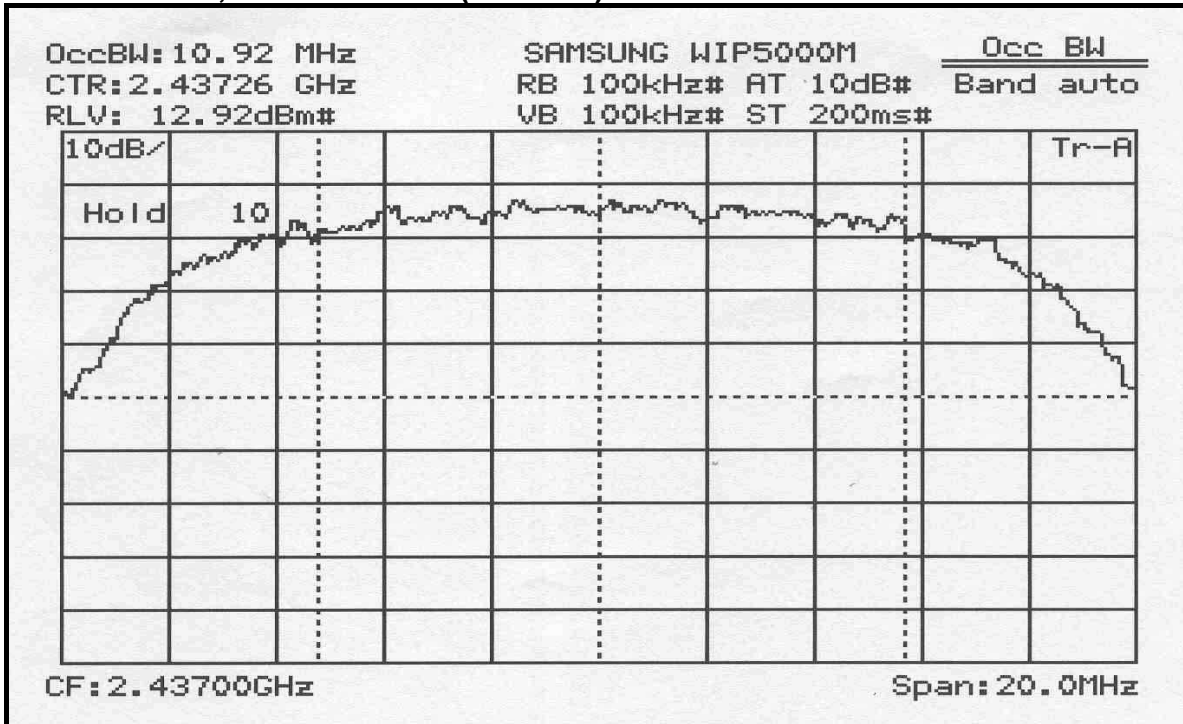

## PLOT OF TEST DATA

### 6dB Bandwidth, High Channel (2462MHz)

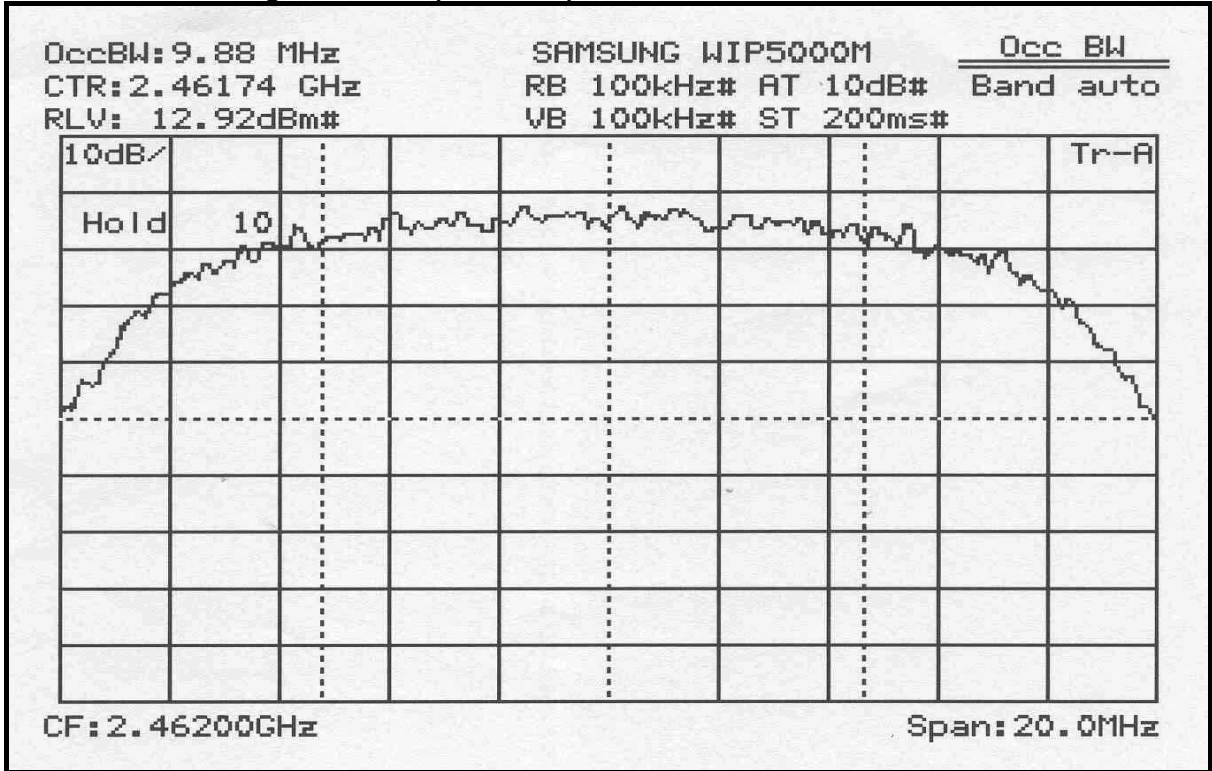

## TEST DATA

---

### Peak Power Output-15.247(b)

FCC ID : A3LWIP5000M

Test Mode : set to Lowest channel and Middle channel and Highest channel

Channel	Frequency (MHz)	Result (dBm)	Limit (dBm)	Margin (dBm)
1	2412	12.07	30	-17.93
6	2437	11.05	30	-18.95
11	2462	11.98	30	-18.02



---

Tested by **S. H. Baek**

## TEST DATA

---

### Conducted Spurious Emission-15.247(c)

FCC ID : A3LWIP5000M

Test Mode : set to Lowest channel and Middle channel and Highest channel

Channel	Frequency (MHz)	Result (dBc)	Limit (dBc)	Margin (dB)
1	2412	More than 40dBc	20	
6	2437	More than 40dBc	20	
11	2462	More than 40dBc	20	

### Radiated Spurious Emission-15.247(c)

FCC ID : A3LWIP5000M

Test Mode : set to Lowest channel and Middle channel and Highest channel

\*)The result of WIP-5000 was under 20dB below fundamental.


Channel	Frequency (MHz)	Pol (H/V)	*)Result (dBuV)	Fundamental (dBuV/m)	Margin (dB)
1	2412	H	Under 20dB below fundamental	62.3	
1	2412	V	Under 20dB below fundamental	53.8	
6	2437	H	Under 20dB below fundamental	58.5	
6	2437	V	Under 20dB below fundamental	55.5	
11	2462	H	Under 20dB below fundamental	56.2	
11	2462	V	Under 20dB below fundamental	53.5	




Tested by **S. H. Baek**

## PLOT OF TEST DATA

### Band edge at 2.4GHz, Low Channel

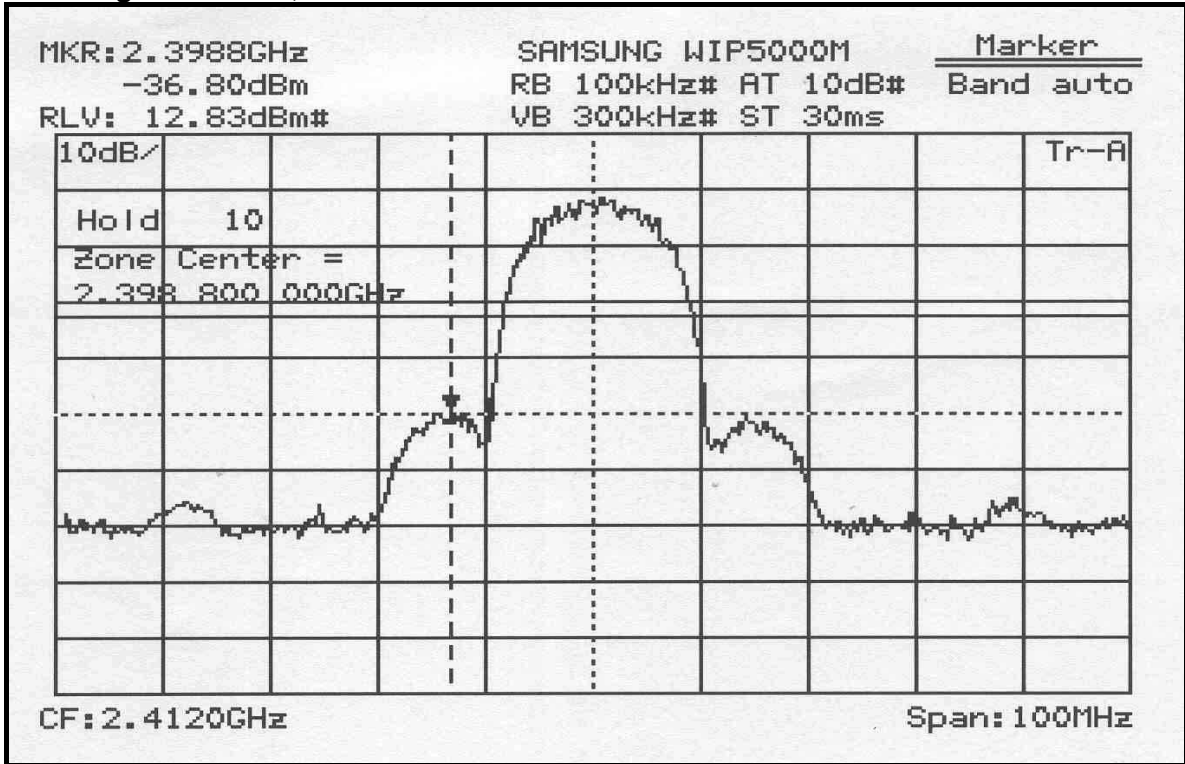


### Conducted Spurious Emissions, Low Channel

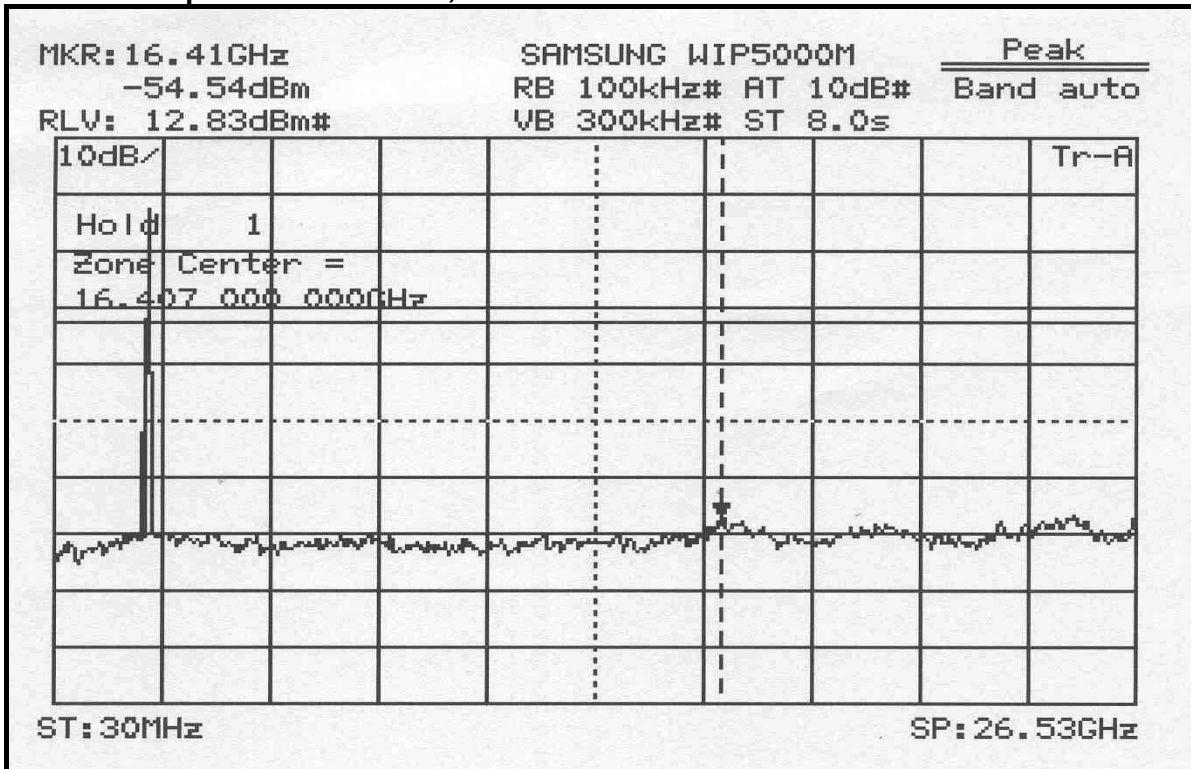


## PLOT OF TEST DATA

### Conducted Spurious Emissions, Middle Channel

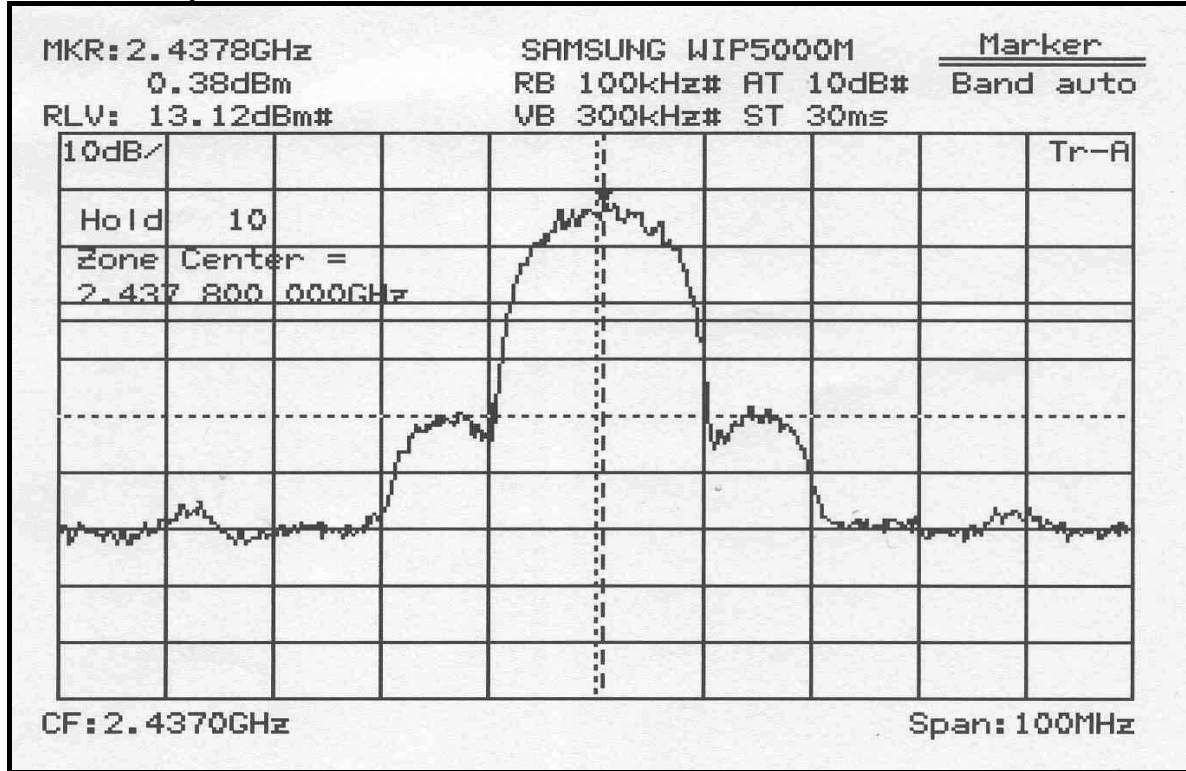


### Conducted Spurious Emissions, Middle Channel

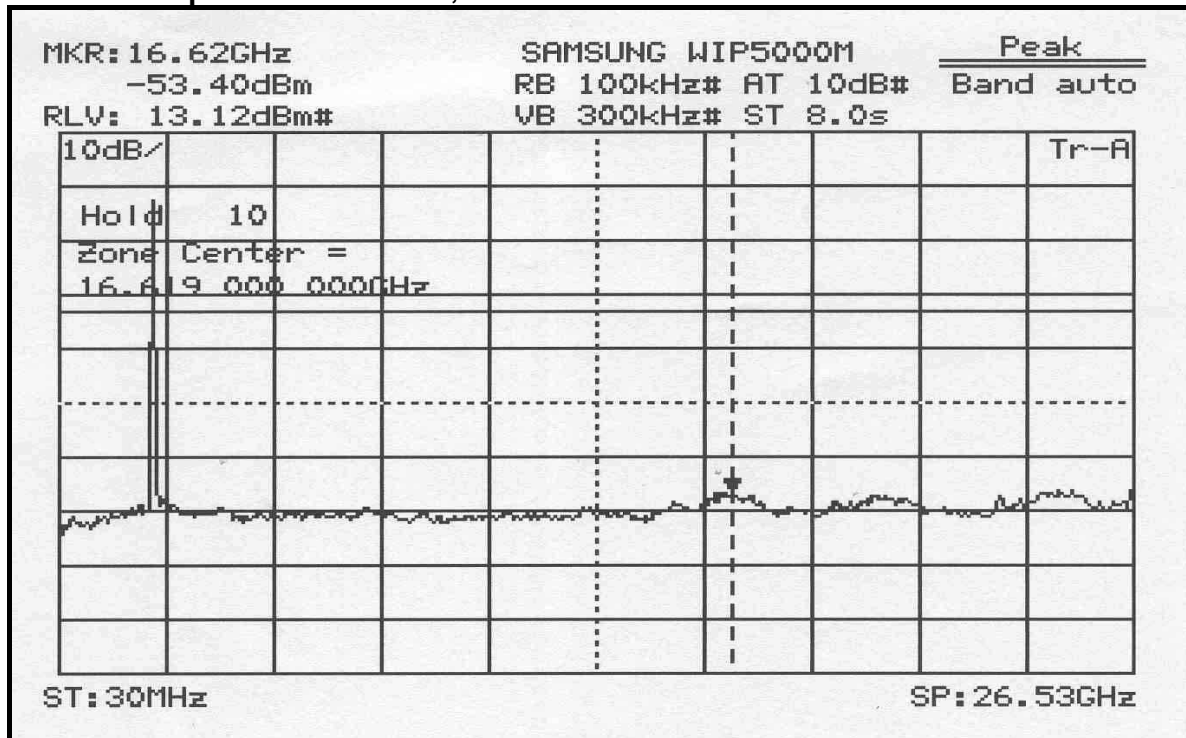


## PLOT OF TEST DATA

**Band edge at 2.4835GHz, High Channel**

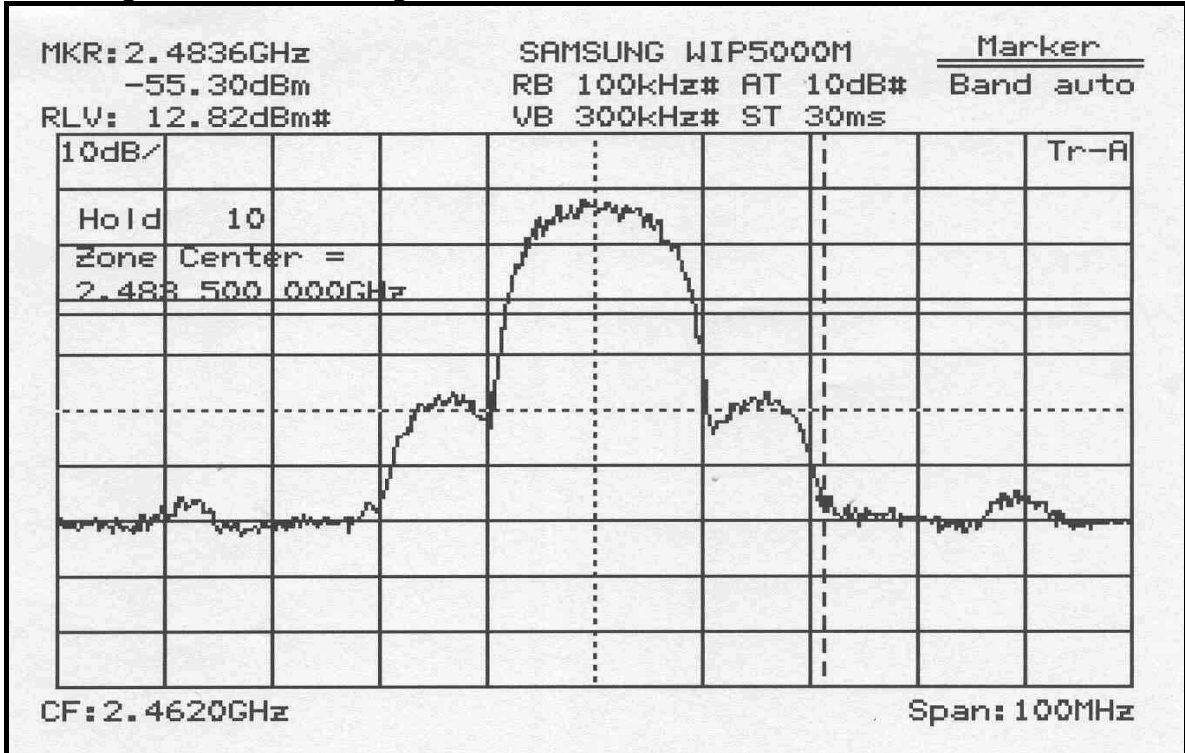


**Conducted Spurious Emissions, High Channel**

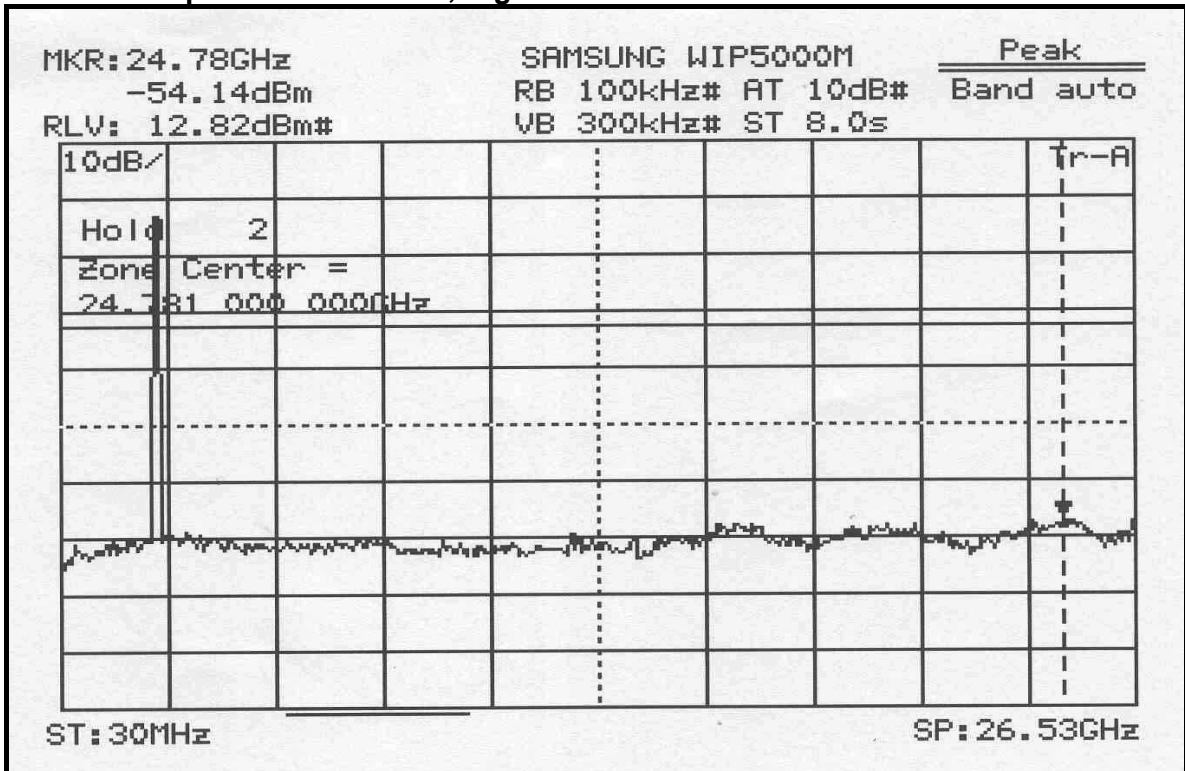


## PLOT OF TEST DATA

### Radiated Spurious Emissions, low Channel(Horizontal)

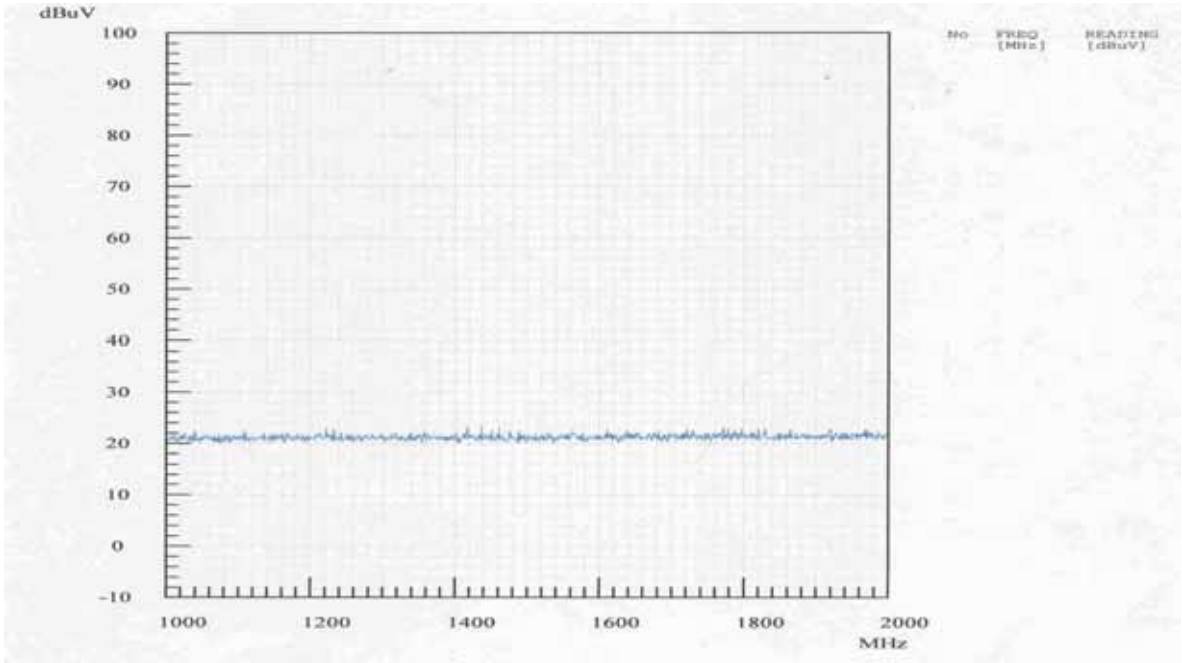


### Radiated Spurious Emissions, low Channel(Horizontal)

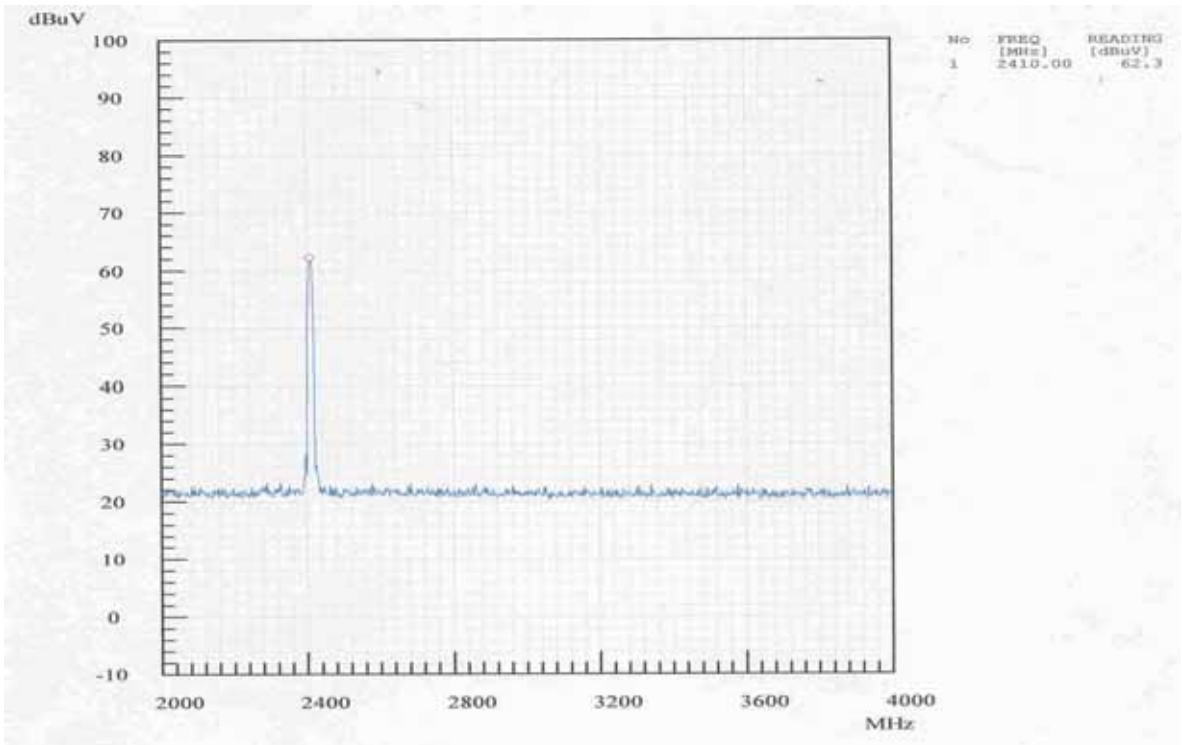


## ***PLOT OF TEST DATA***

### **Radiated Spurious Emissions, low Channel(Horizontal)**

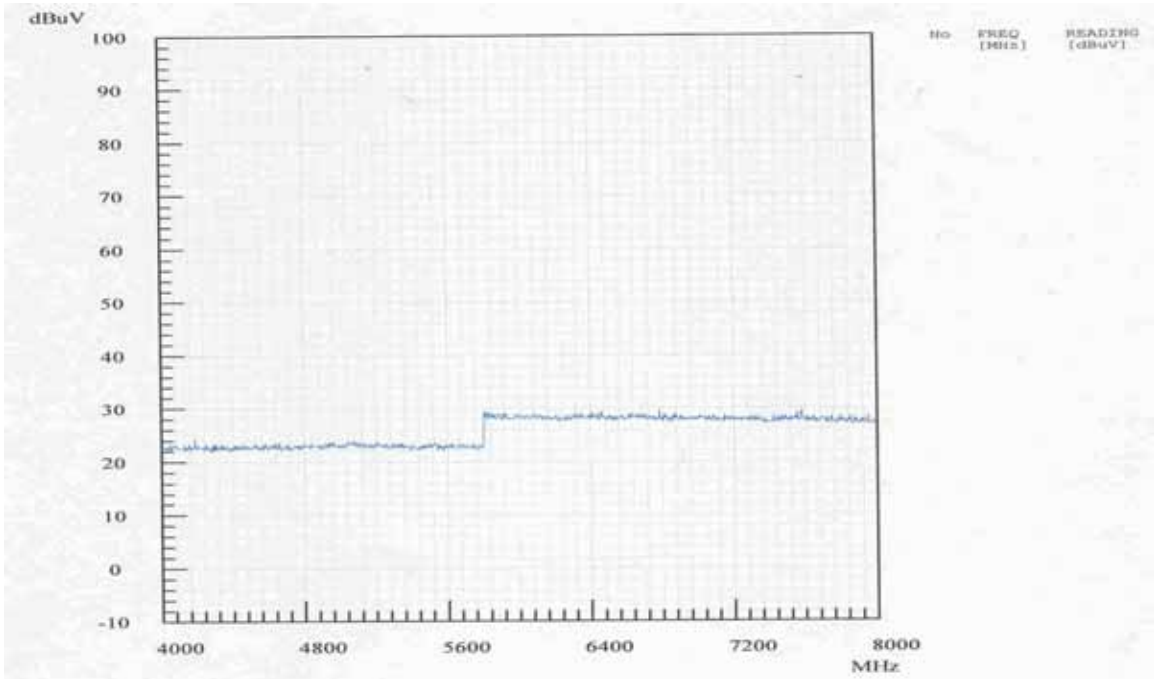


### **Radiated Spurious Emissions, low Channel(Horizontal)**

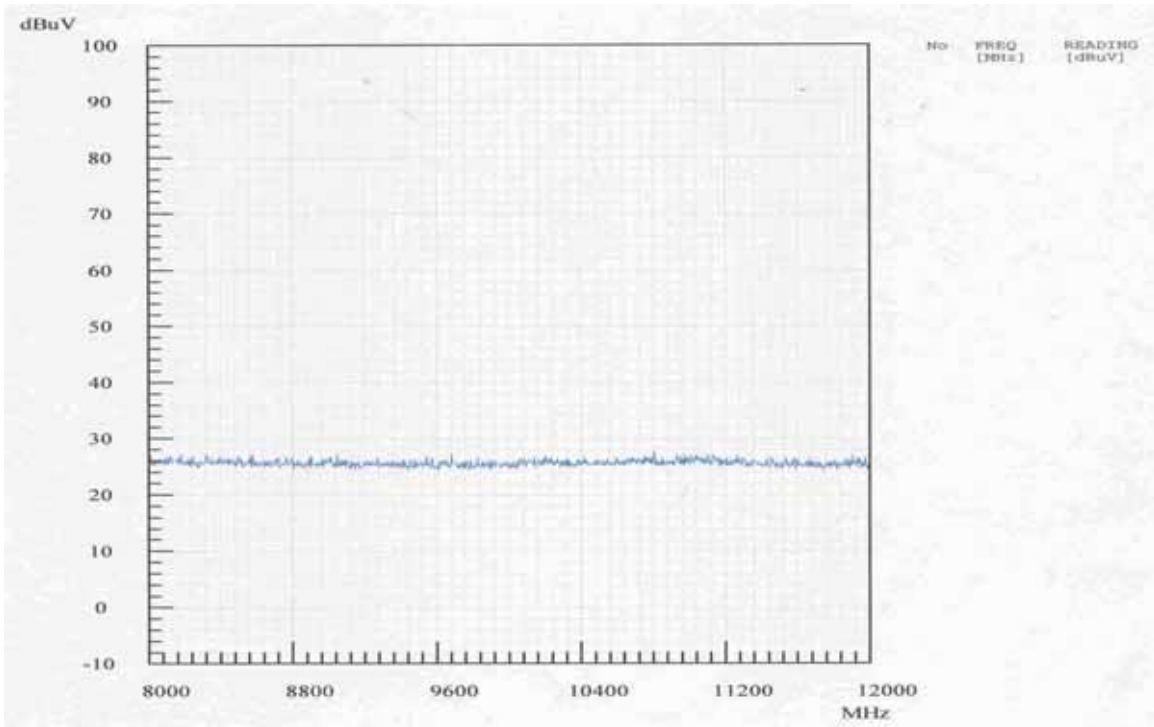




## PLOT OF TEST DATA

Radiated Spurious Emissions, low Channel(Vertical)

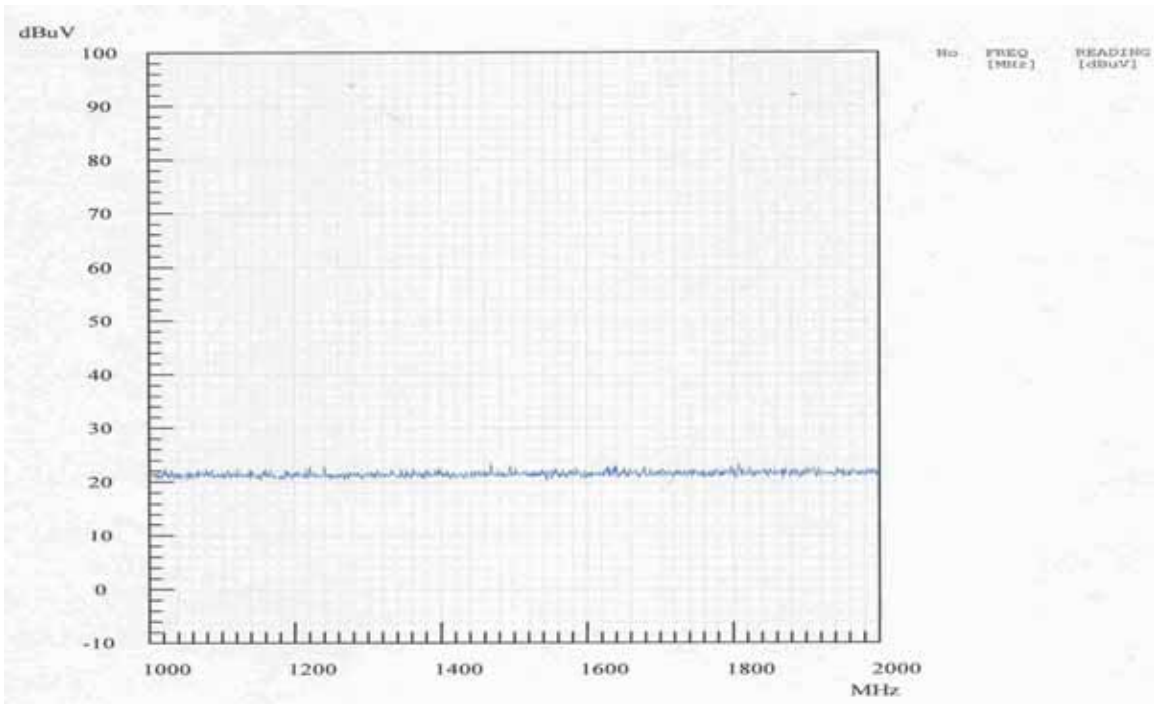


Radiated Spurious Emissions, low Channel(Vertical)

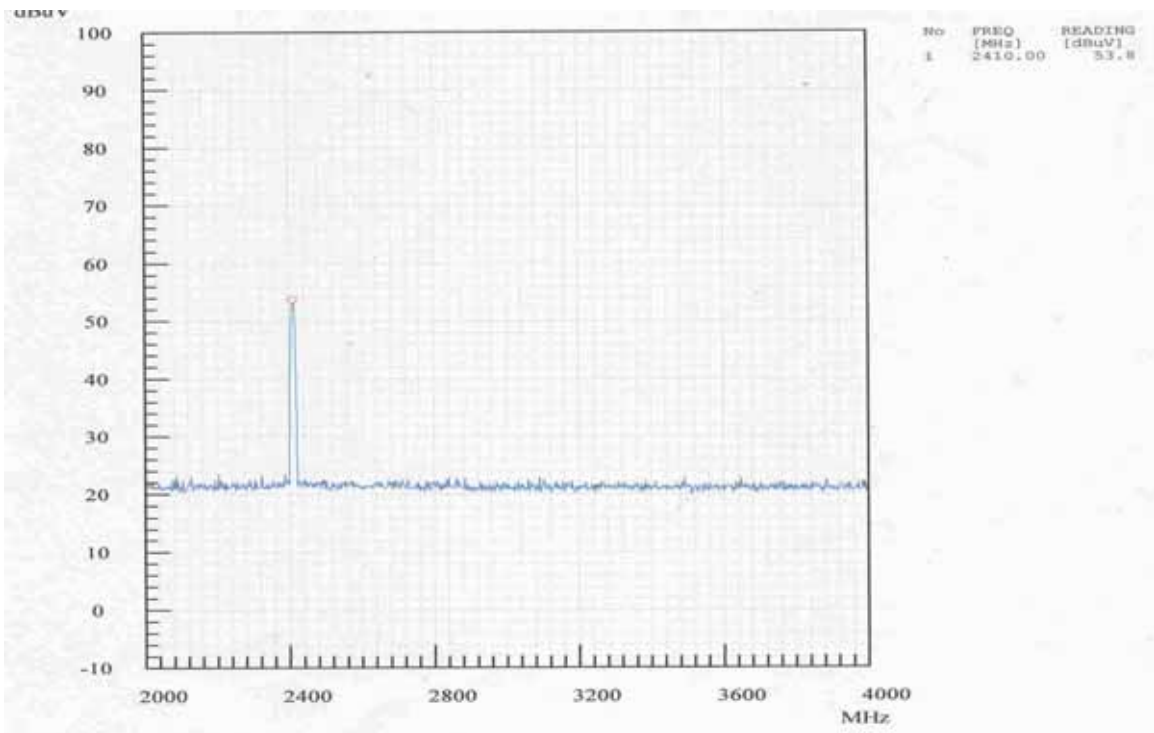


## PLOT OF TEST DATA

### Radiated Spurious Emissions, low Channel(Vertical)

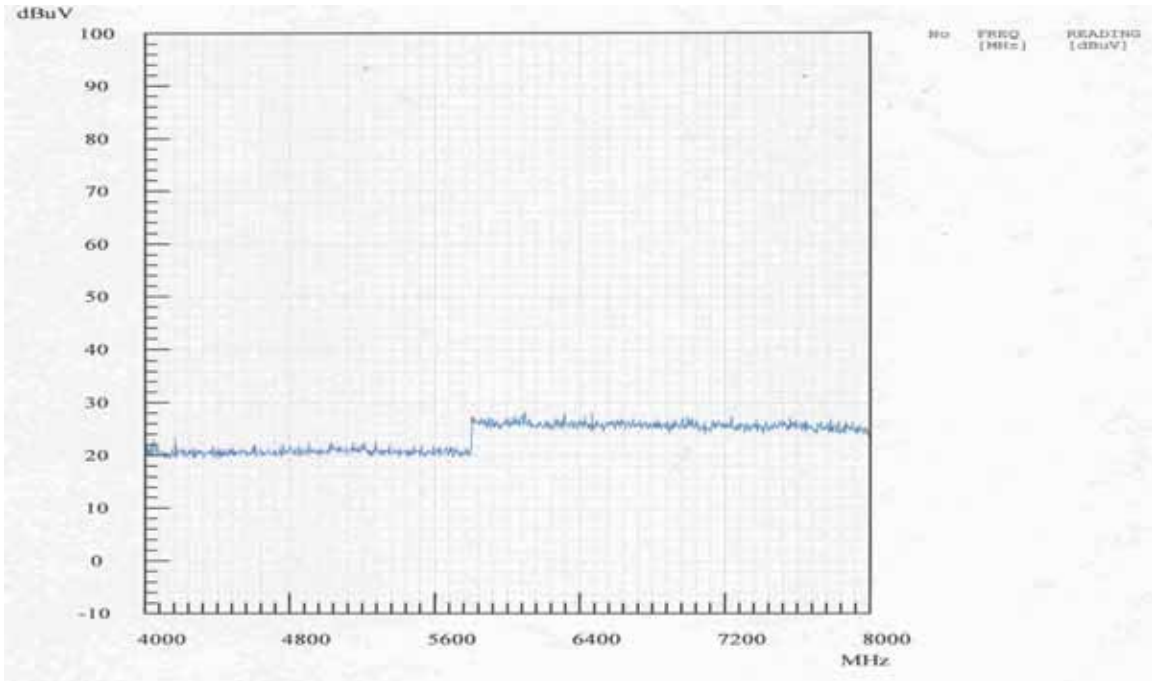


### Radiated Spurious Emissions, low Channel(Vertical)

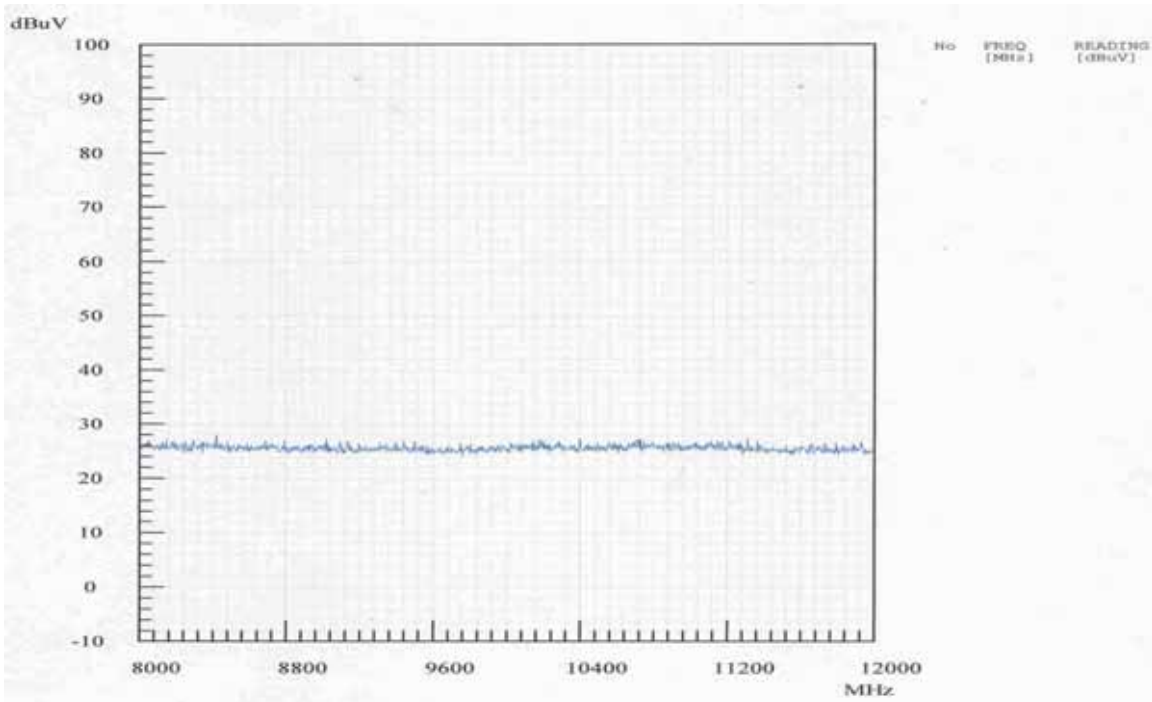


## ***PLOT OF TEST DATA***

### **Radiated Spurious Emissions, low Channel(Vertical)**

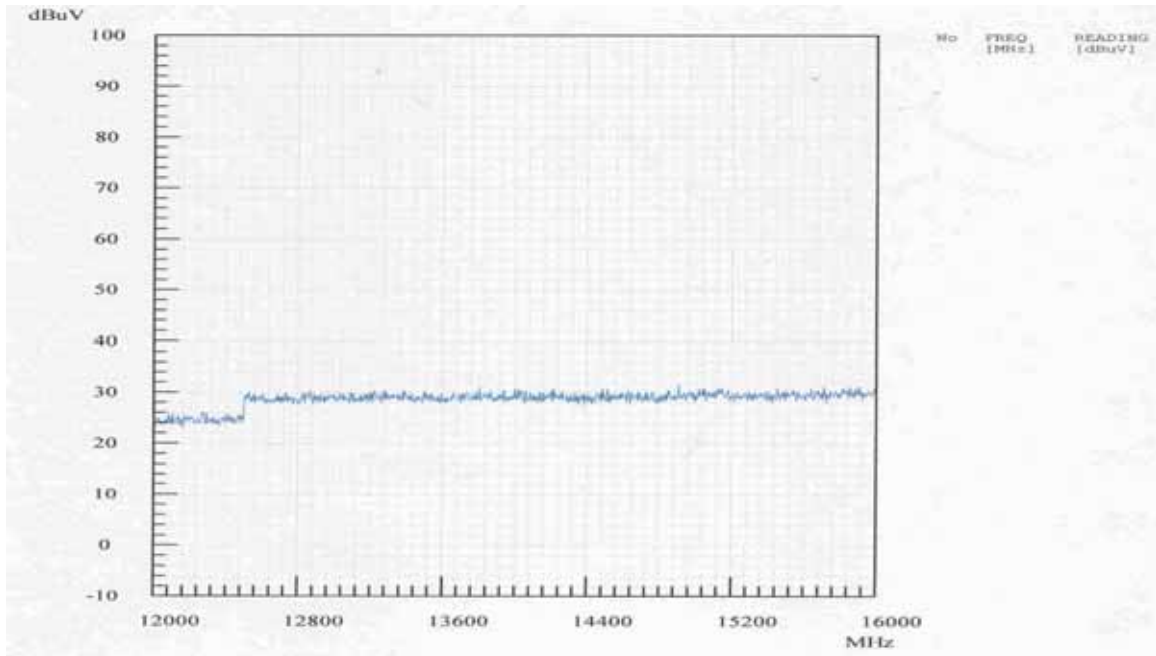


### **Radiated Spurious Emissions, low Channel(Vertical)**

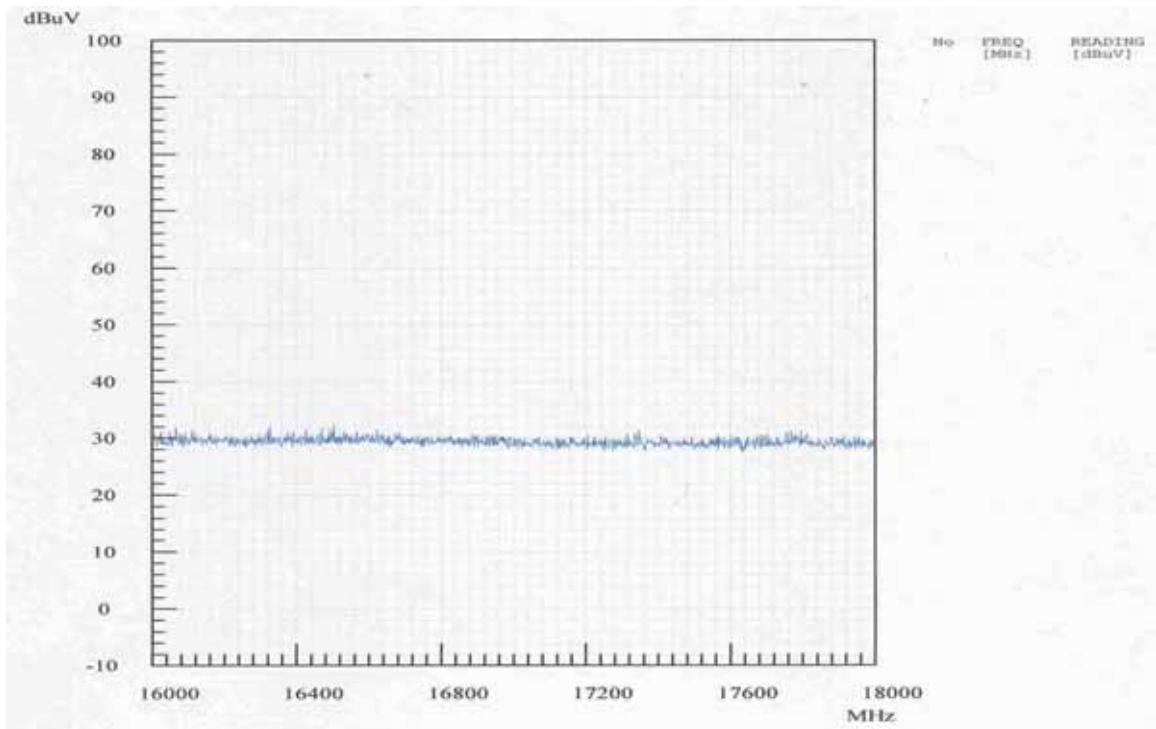


## PLOT OF TEST DATA

### Radiated Spurious Emissions, middle Channel(Horizontal)

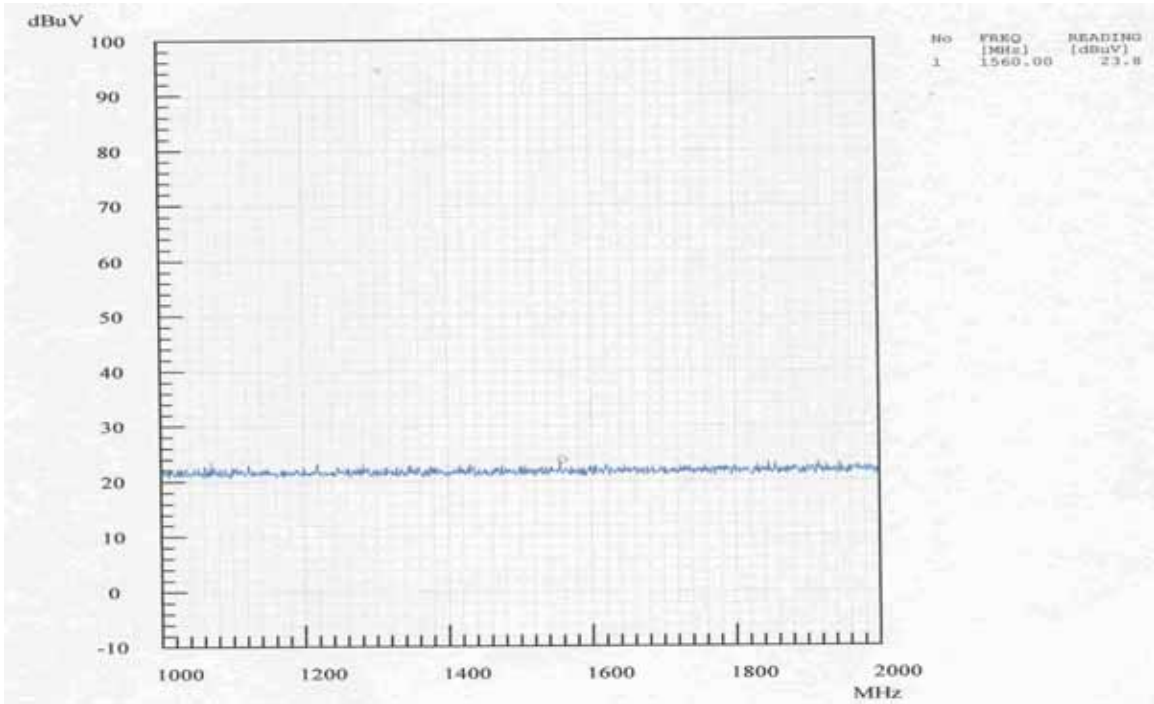


### Radiated Spurious Emissions, middle Channel(Horizontal)

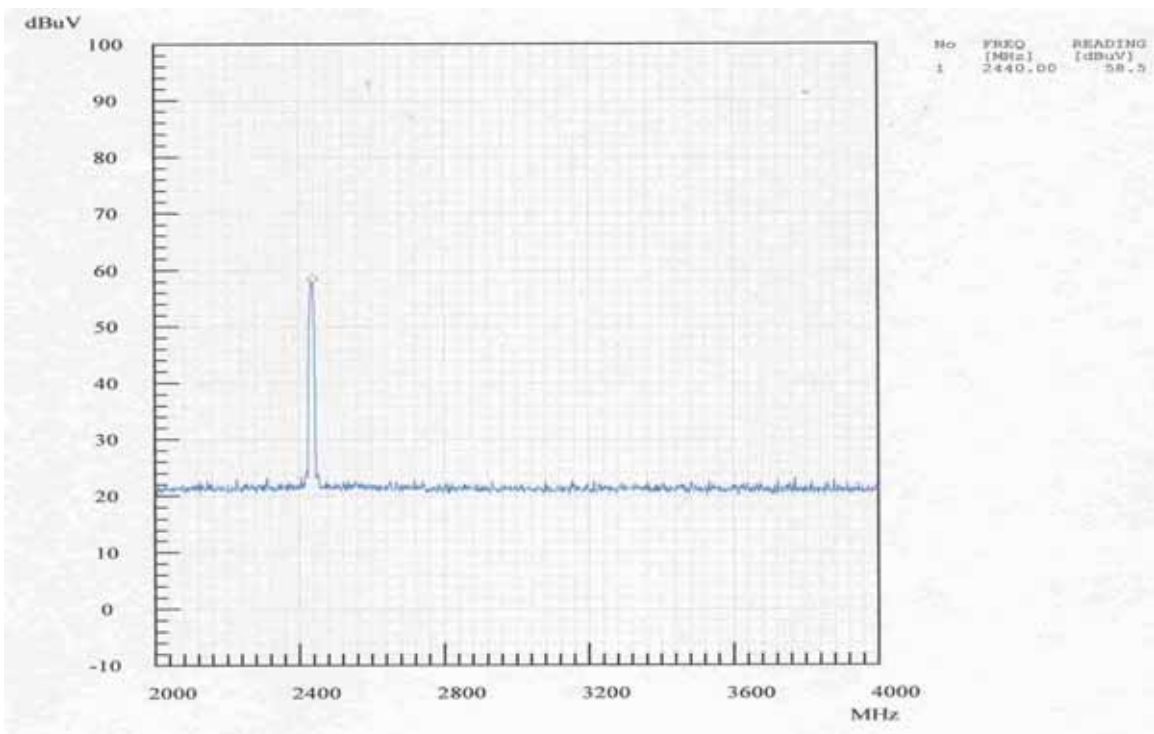


## PLOT OF TEST DATA

### Radiated Spurious Emissions, middle Channel(Horizontal)

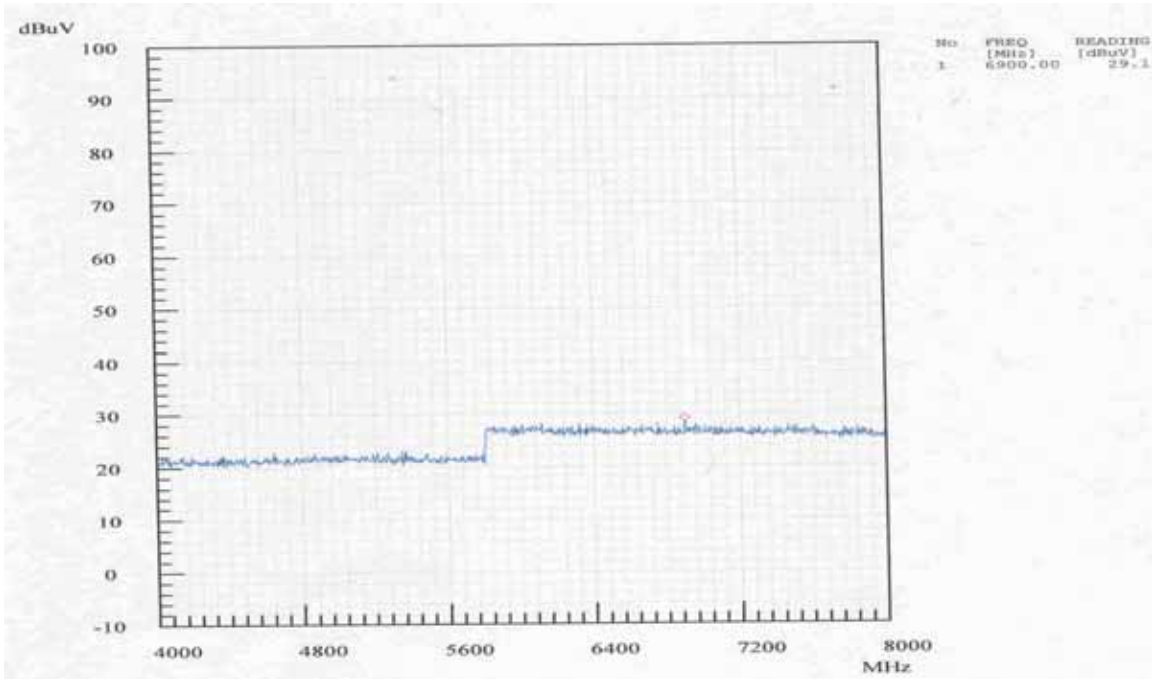


### Radiated Spurious Emissions, middle Channel(Horizontal)

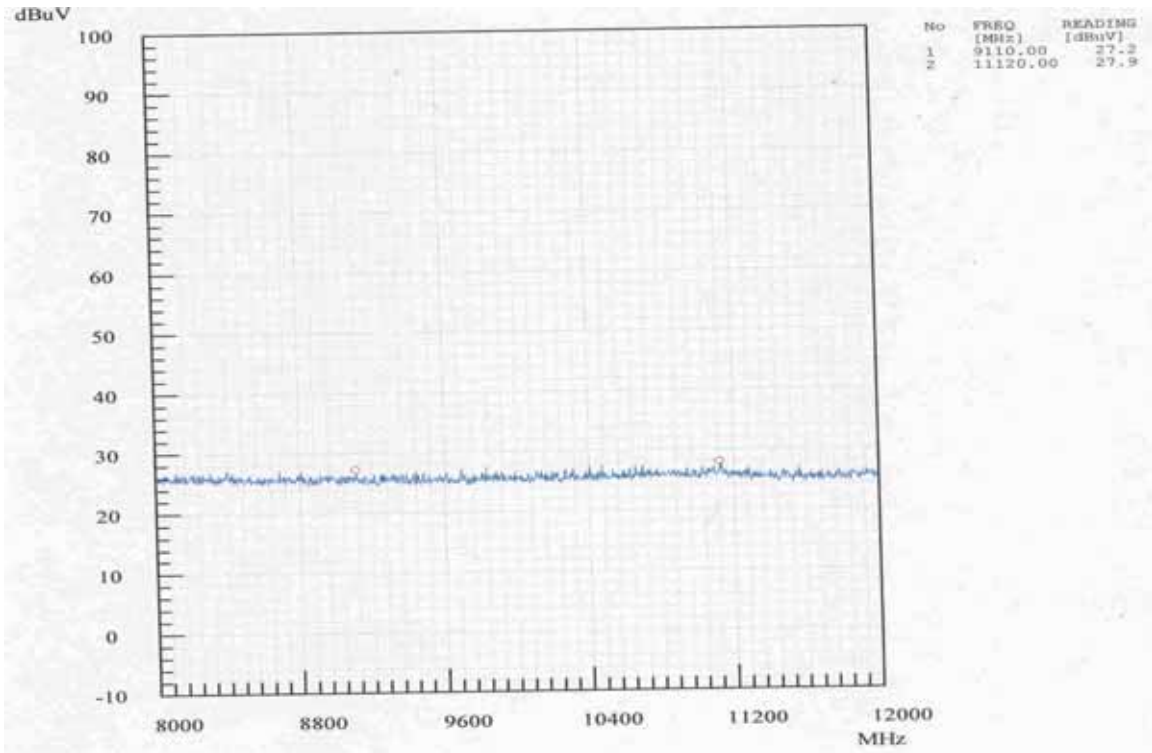


## ***PLOT OF TEST DATA***

### **Radiated Spurious Emissions, middle Channel(Horizontal)**

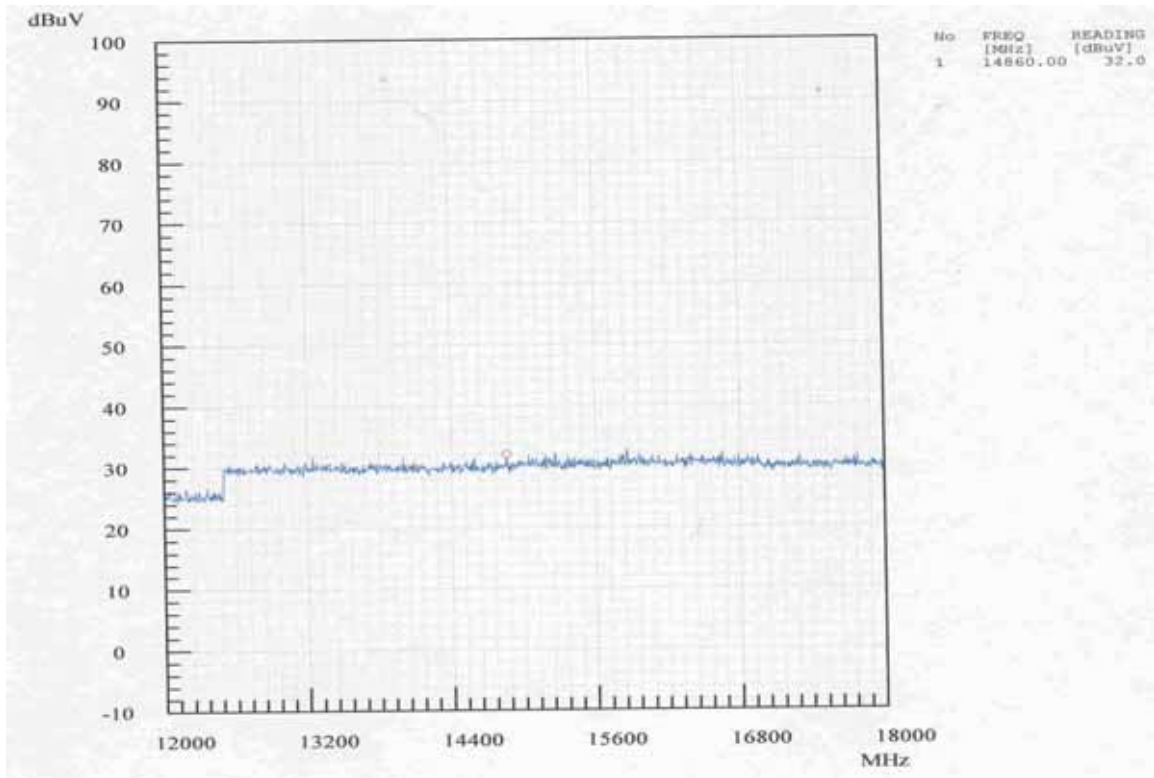


## PLOT OF TEST DATA

### Radiated Spurious Emissions, middle Channel(Vertical)

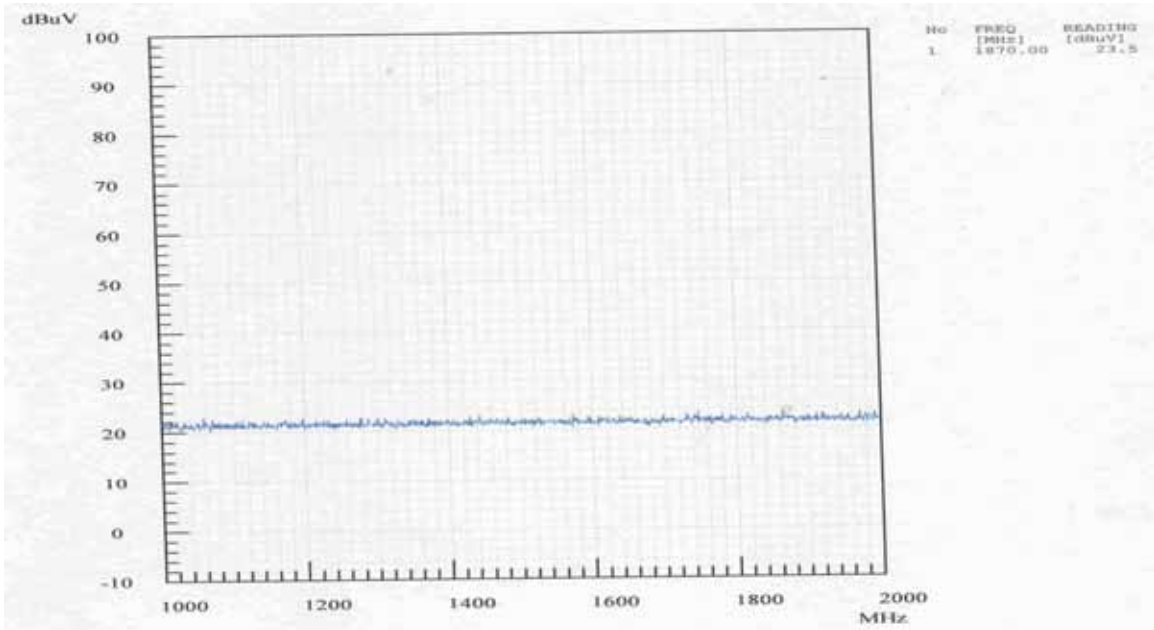


### Radiated Spurious Emissions, middle Channel(Vertical)

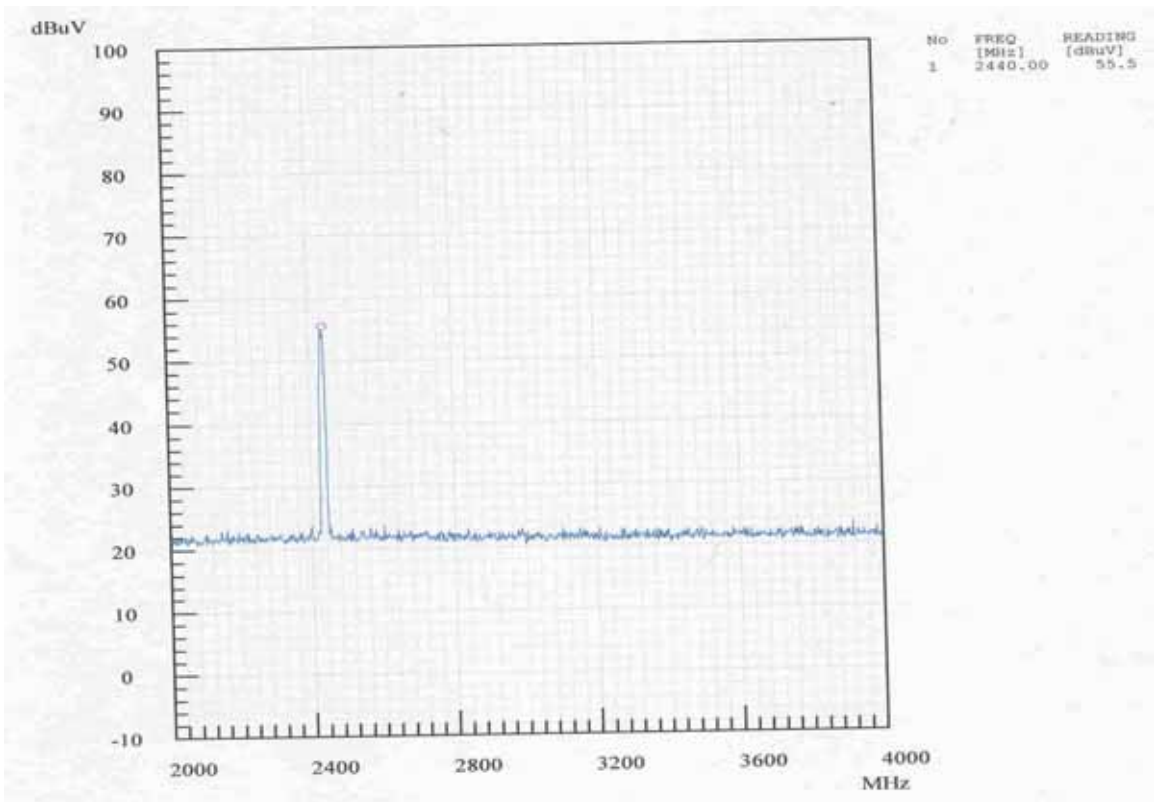


## PLOT OF TEST DATA

### Radiated Spurious Emissions, middle Channel(Vertical)

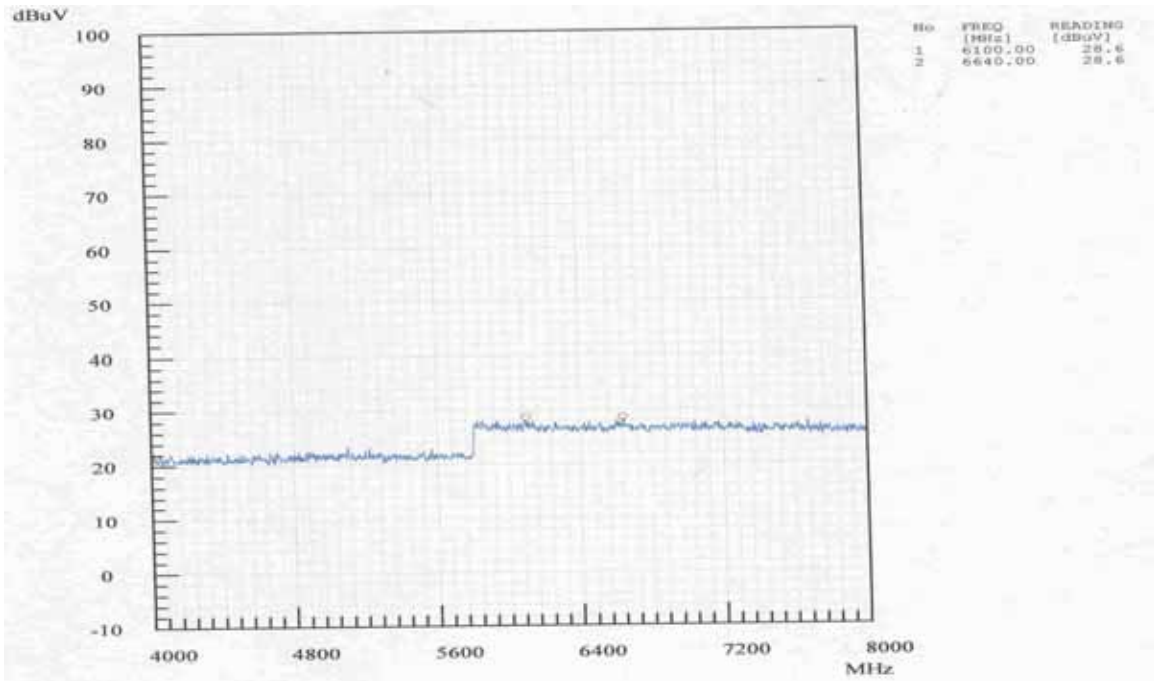


### Radiated Spurious Emissions, middle Channel(Vertical)

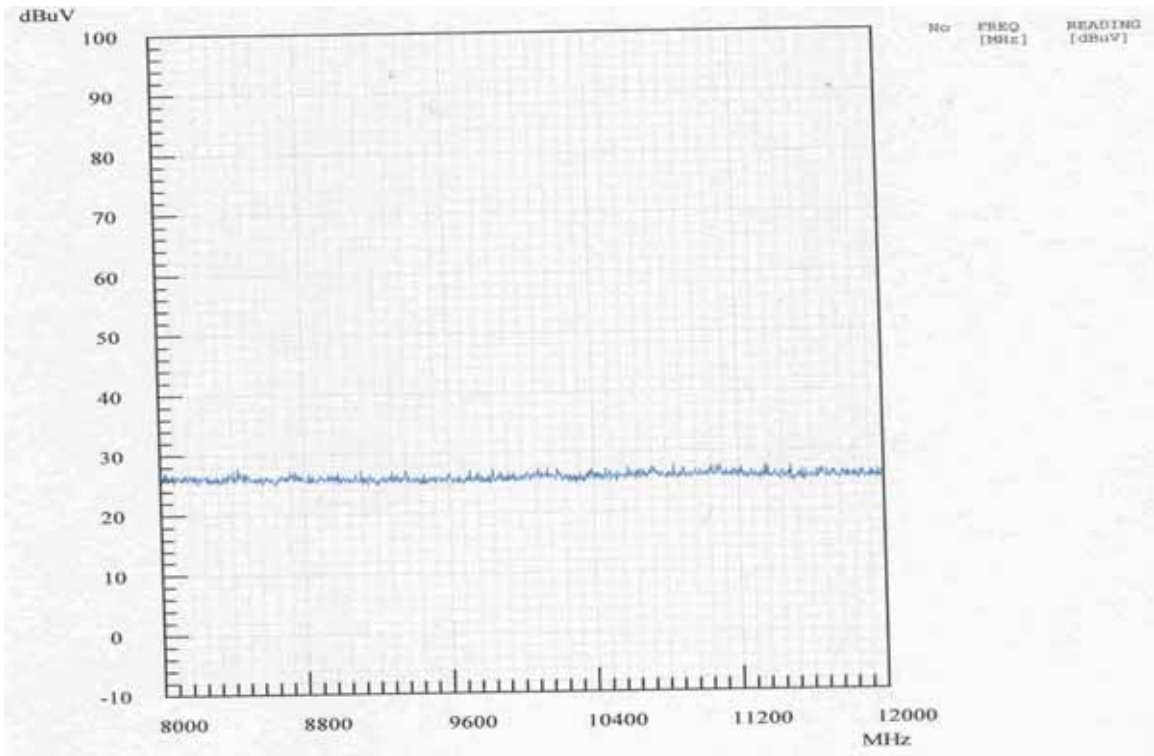

## ***PLOT OF TEST DATA***


---

### **Radiated Spurious Emissions, middle Channel(Vertical)**

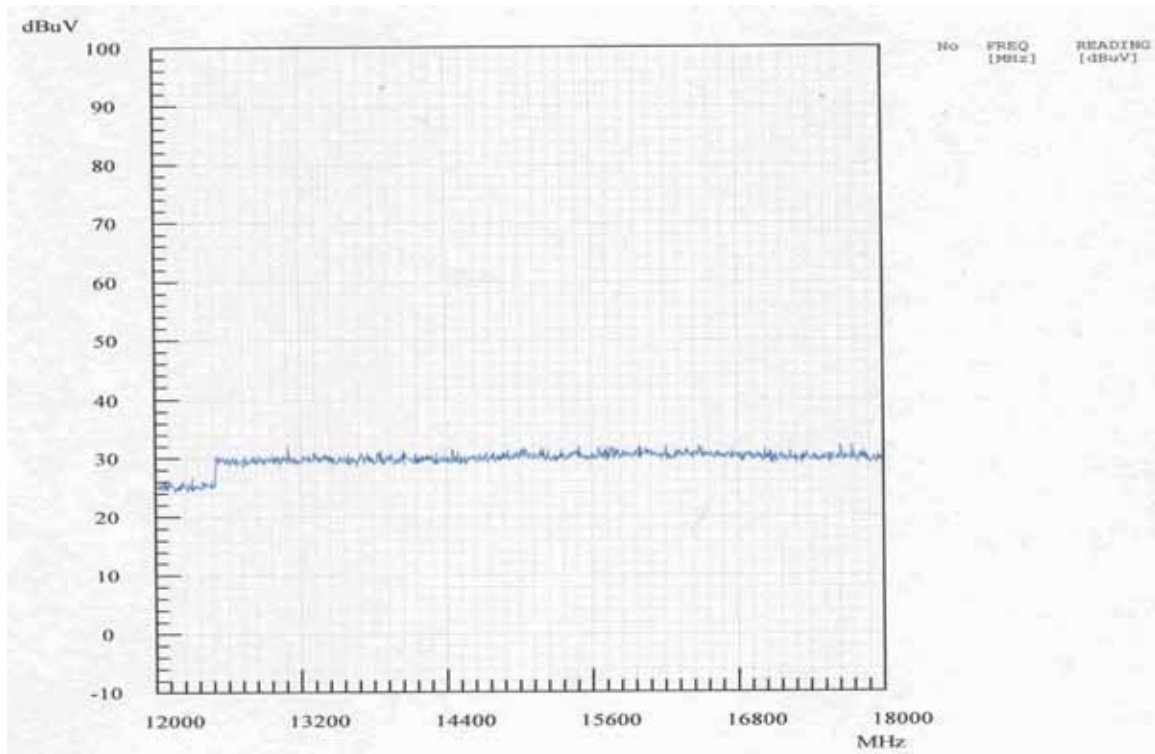


## PLOT OF TEST DATA

### Radiated Spurious Emissions, Highest Channel(Horizontal)

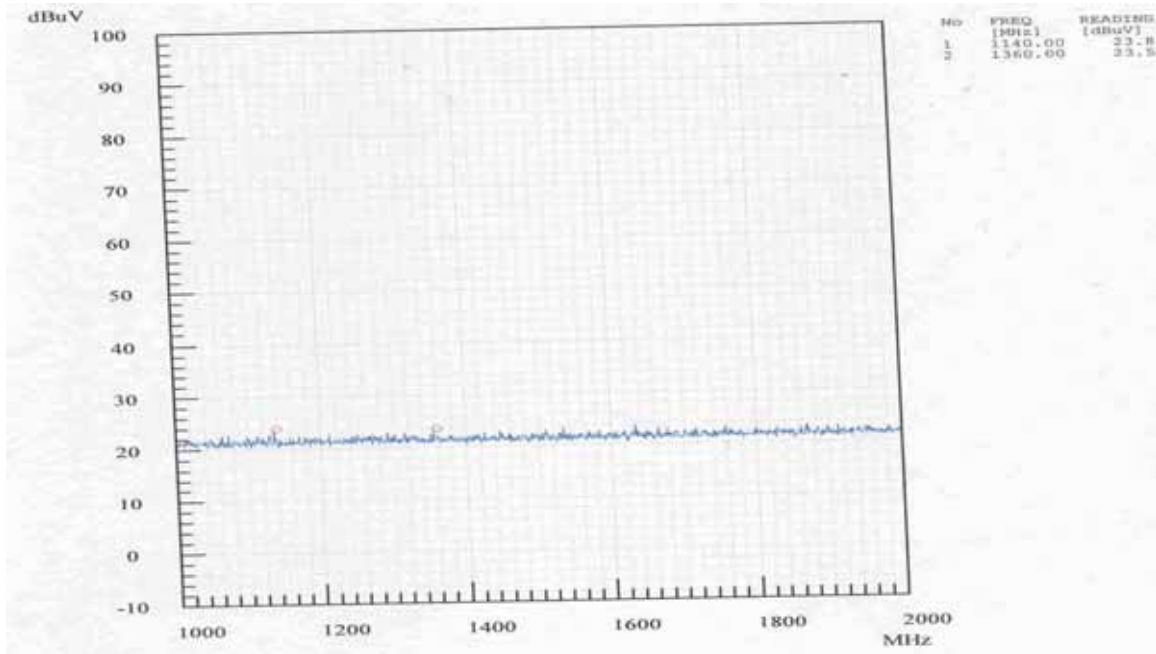


### Radiated Spurious Emissions, Highest Channel(Horizontal)

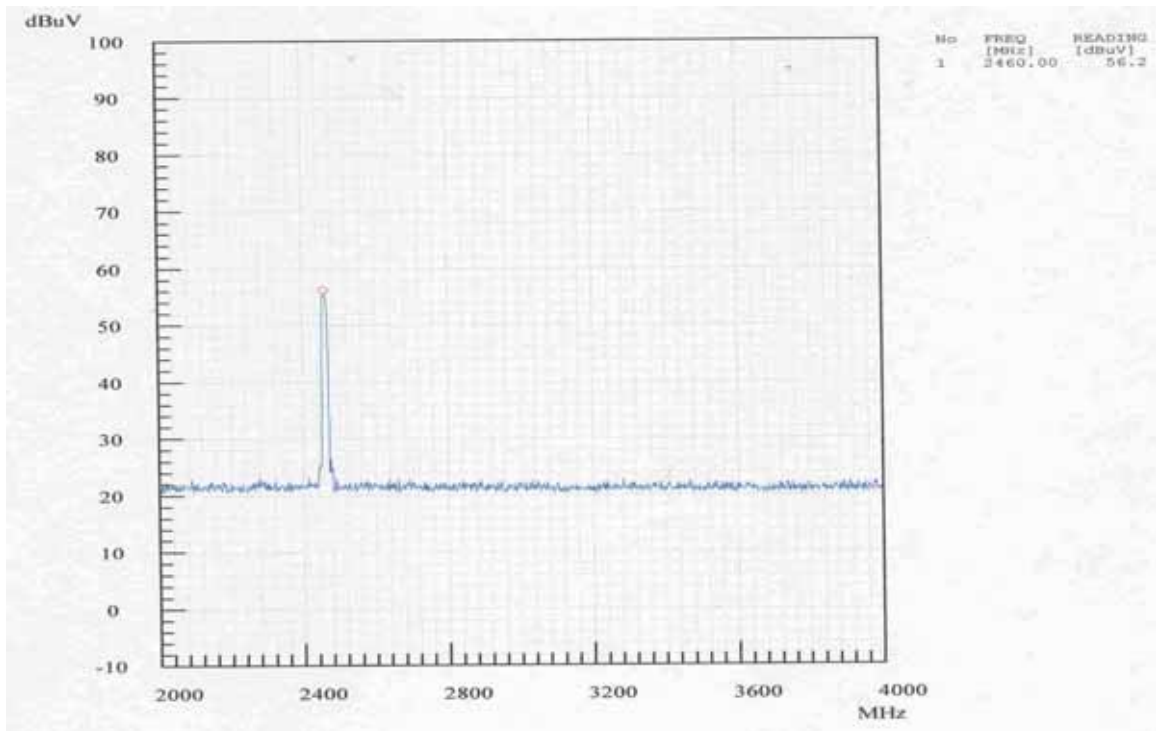


## PLOT OF TEST DATA

### Radiated Spurious Emissions, Highest Channel(Horizontal)

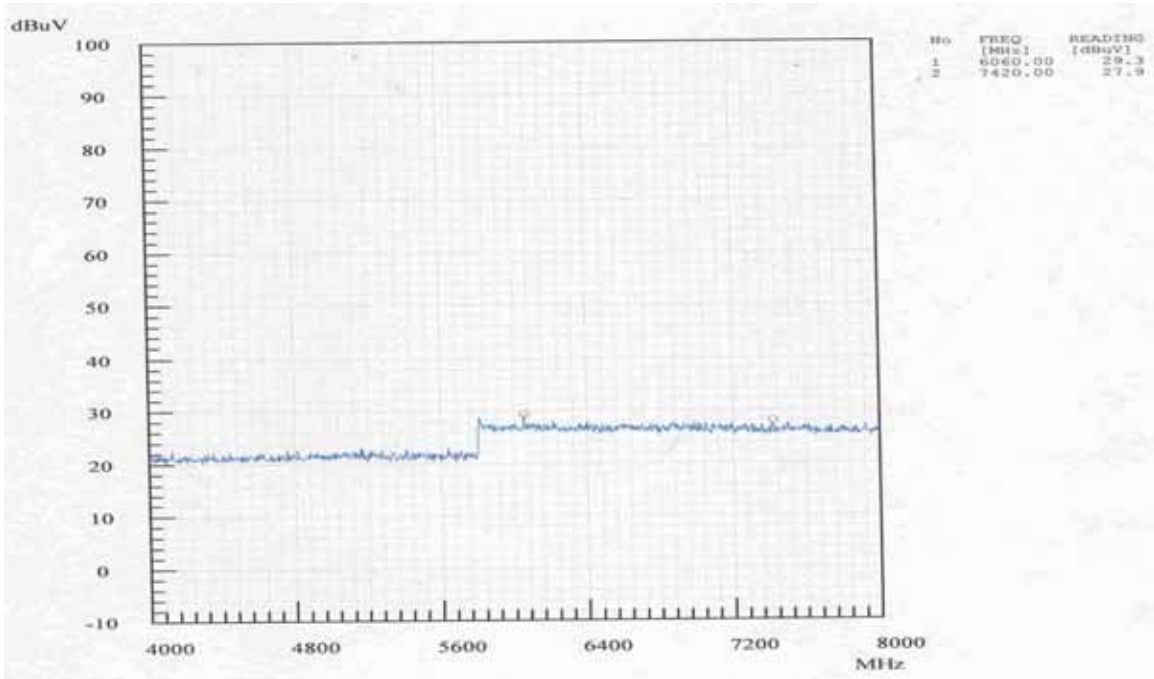


### Radiated Spurious Emissions, Highest Channel(Horizontal)

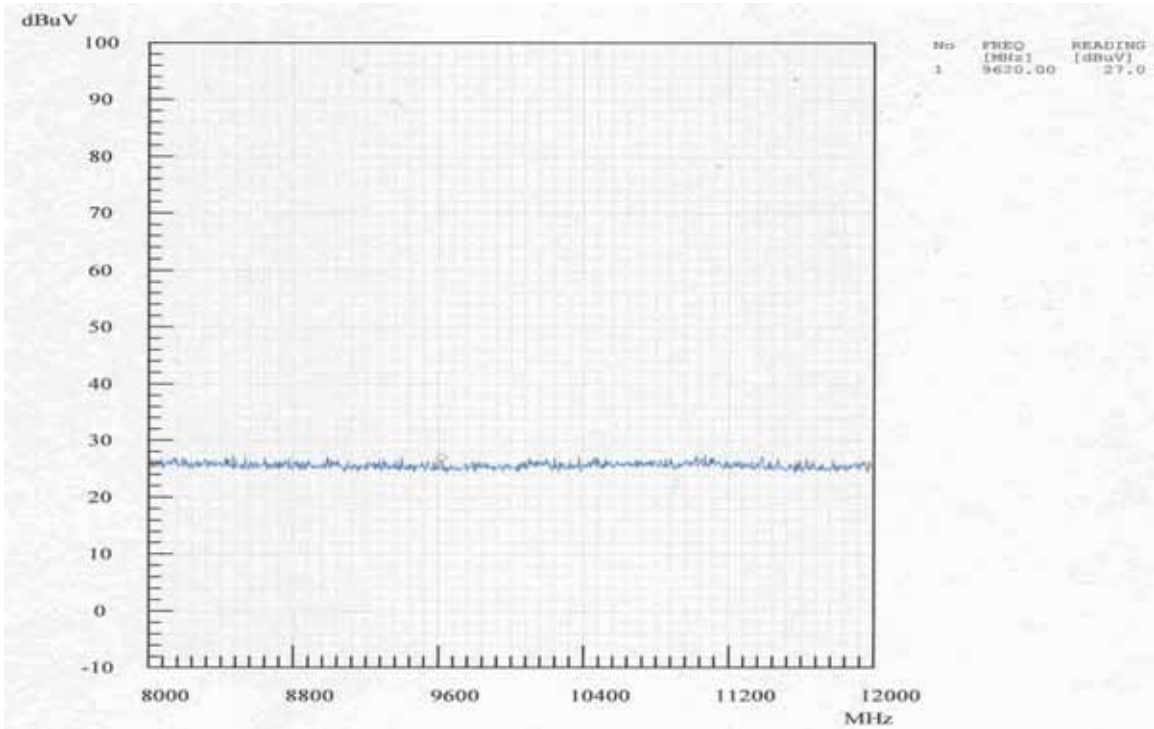


## ***PLOT OF TEST DATA***

### **Radiated Spurious Emissions, Highest Channel(Horizontal)**

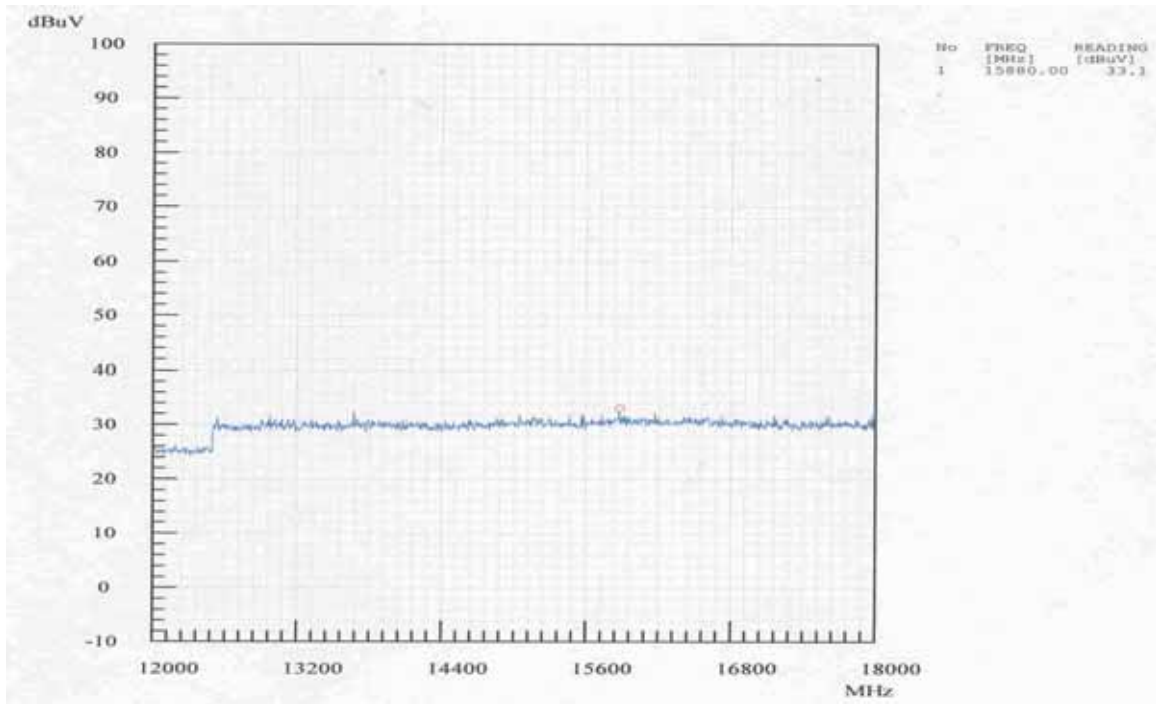


## PLOT OF TEST DATA

**Radiated Spurious Emissions, Highest Channel(Vertical)**

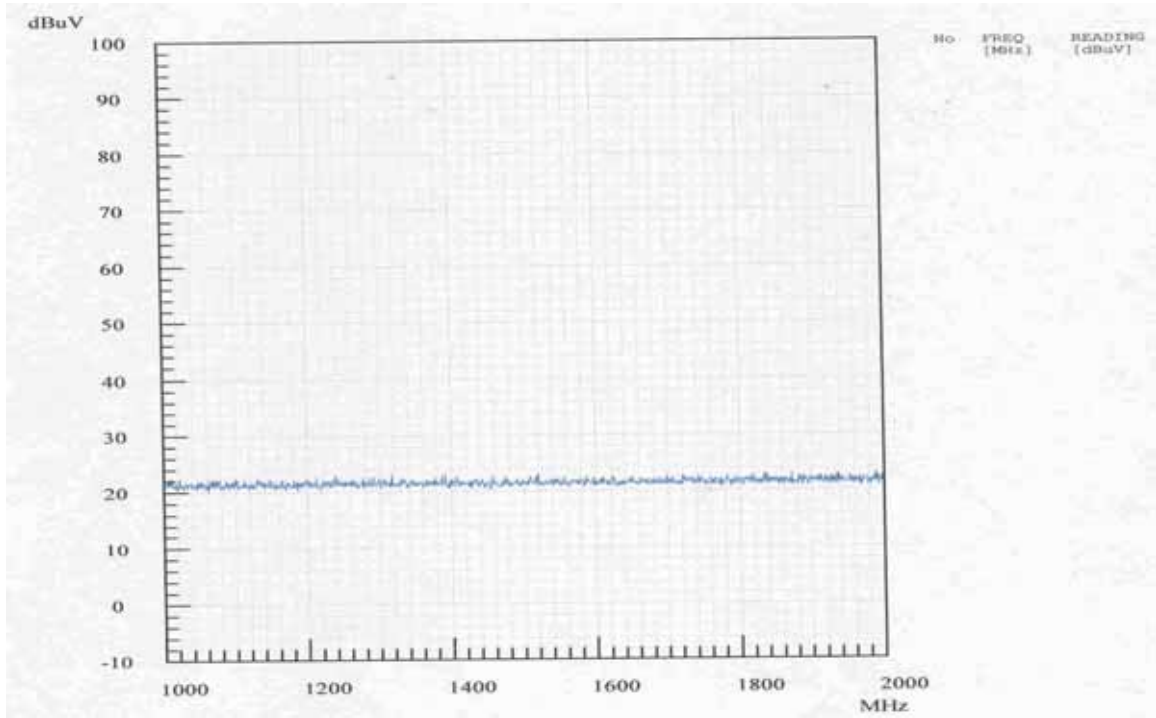


**Radiated Spurious Emissions, Highest Channel(Vertical)**

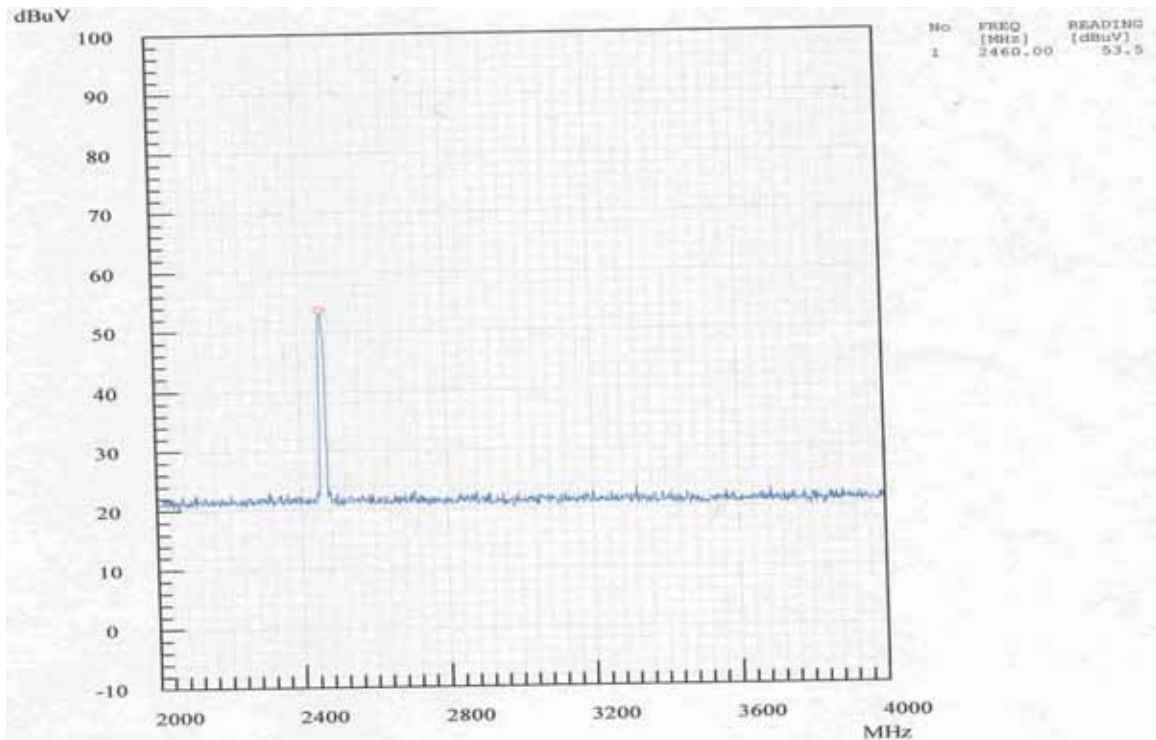


## PLOT OF TEST DATA

### Radiated Spurious Emissions, Highest Channel(Vertical)

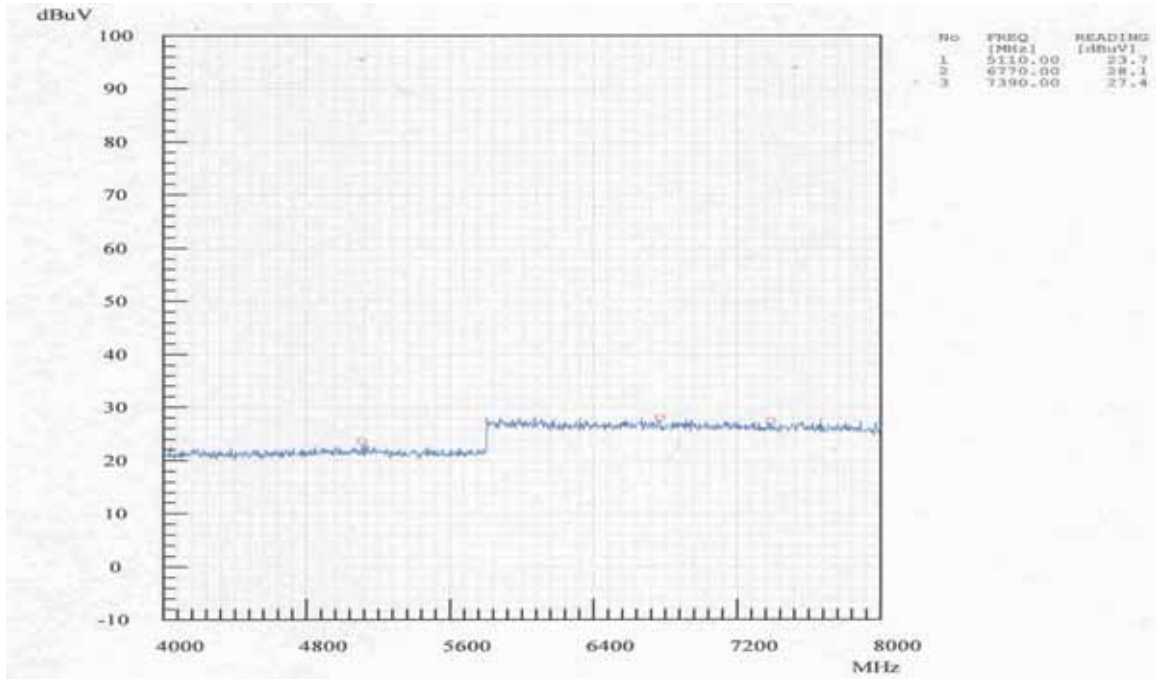


### Radiated Spurious Emissions, Highest Channel(Vertical)

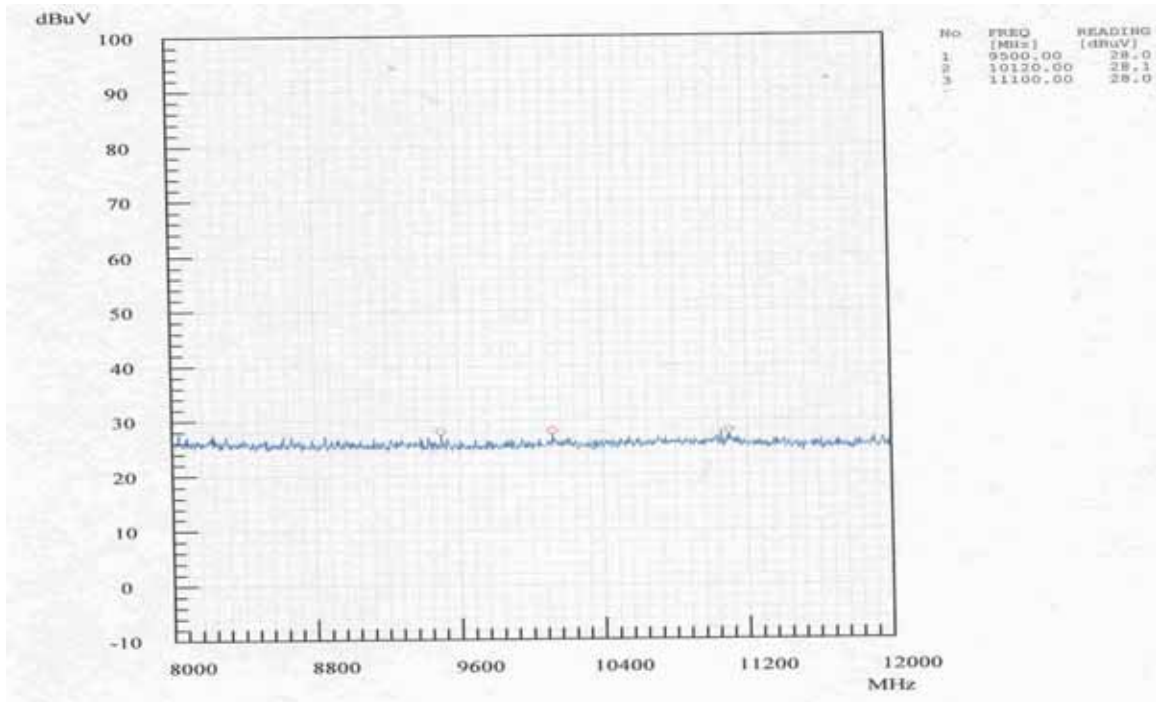

## ***PLOT OF TEST DATA***

### **Radiated Spurious Emissions, Highest Channel(Vertical)**

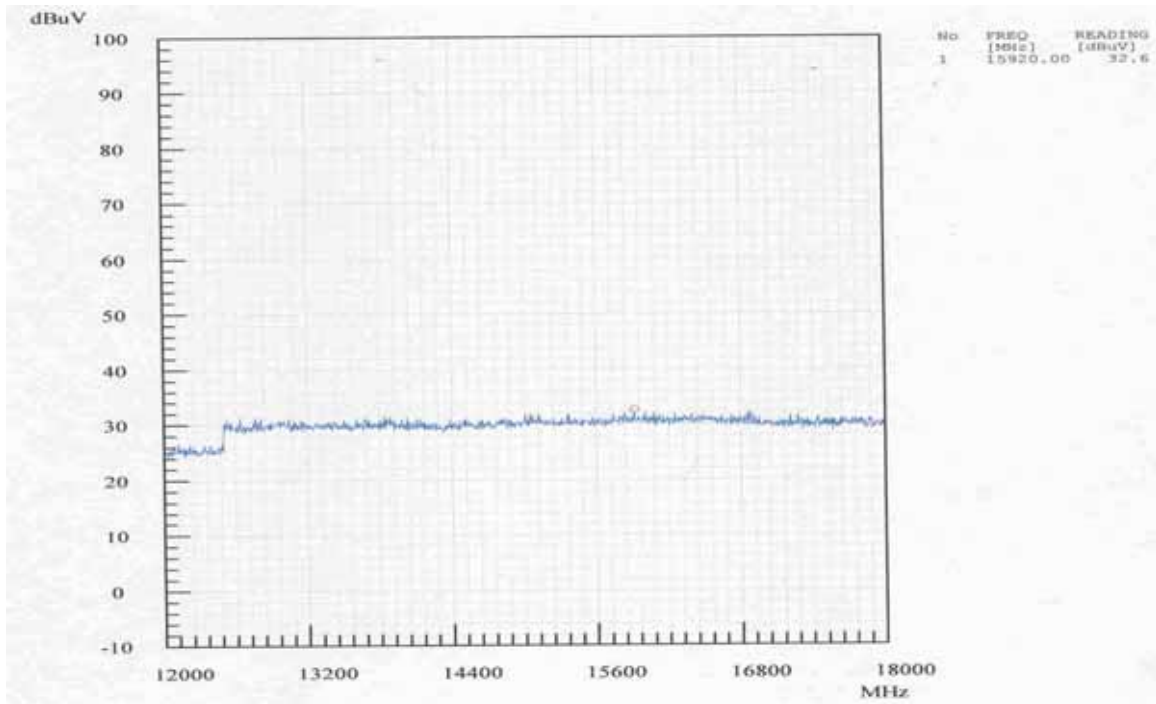

## TEST DATA

---

### Peak Power Spectral Density-15.247(d)

FCC ID : A3LWIP5000M

Test Mode : set to lowest channel and middle channel and highest channel.

Channel	Frequency (MHz)	Result (dBm)	Limit (dBm)	Margin (dBm)
1	2412	-11.90	8	-19.90
6	2437	-12.57	8	-20.57
11	2462	-13.22	8	-21.22




---


Tested by **S. H. Baek**

## PLOT OF TEST DATA

### Peak Power Spectral Density, Low Channel

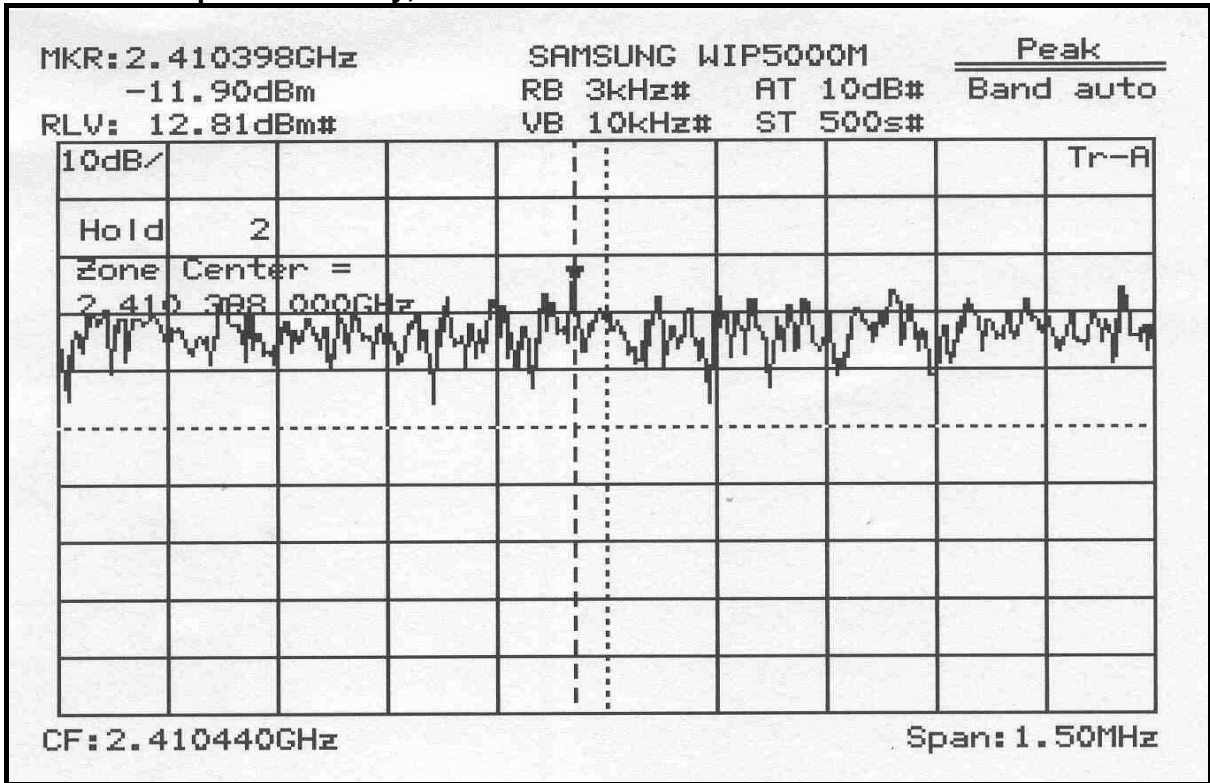


### Peak Power Spectral Density, Middle Channel

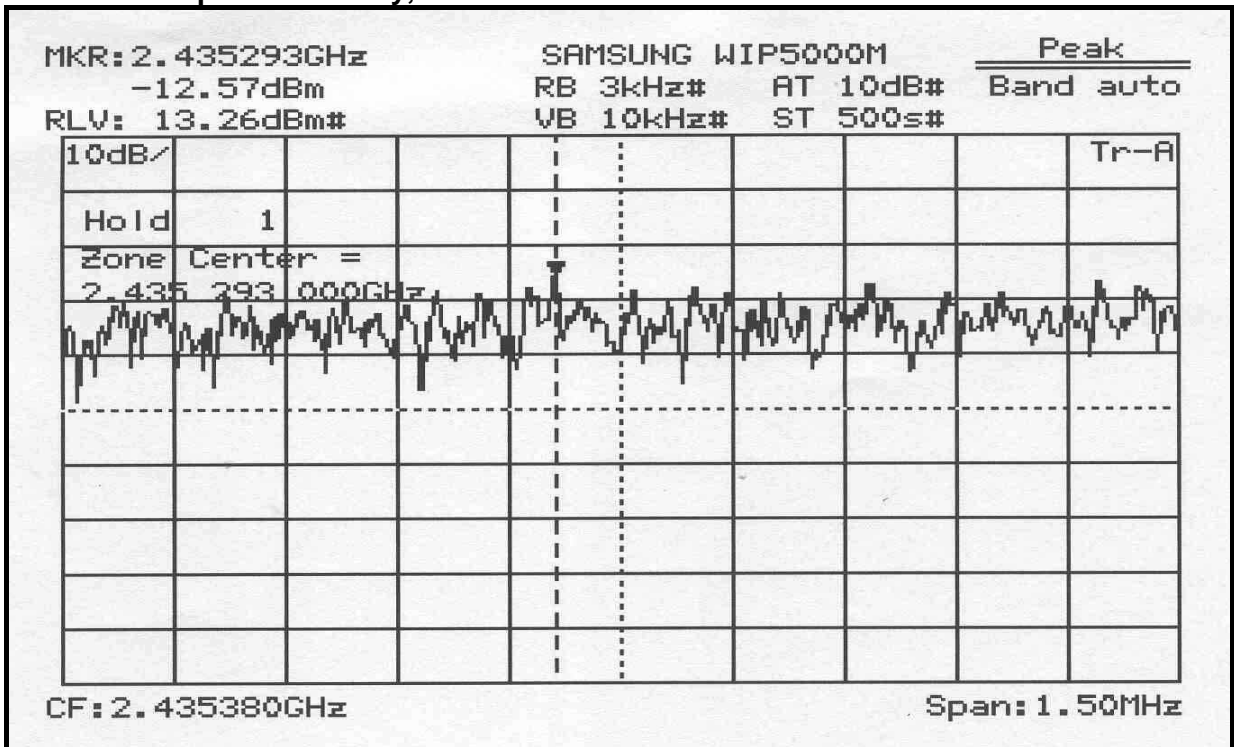

## PLOT OF TEST DATA

### Peak Power Spectral Density, High Channel

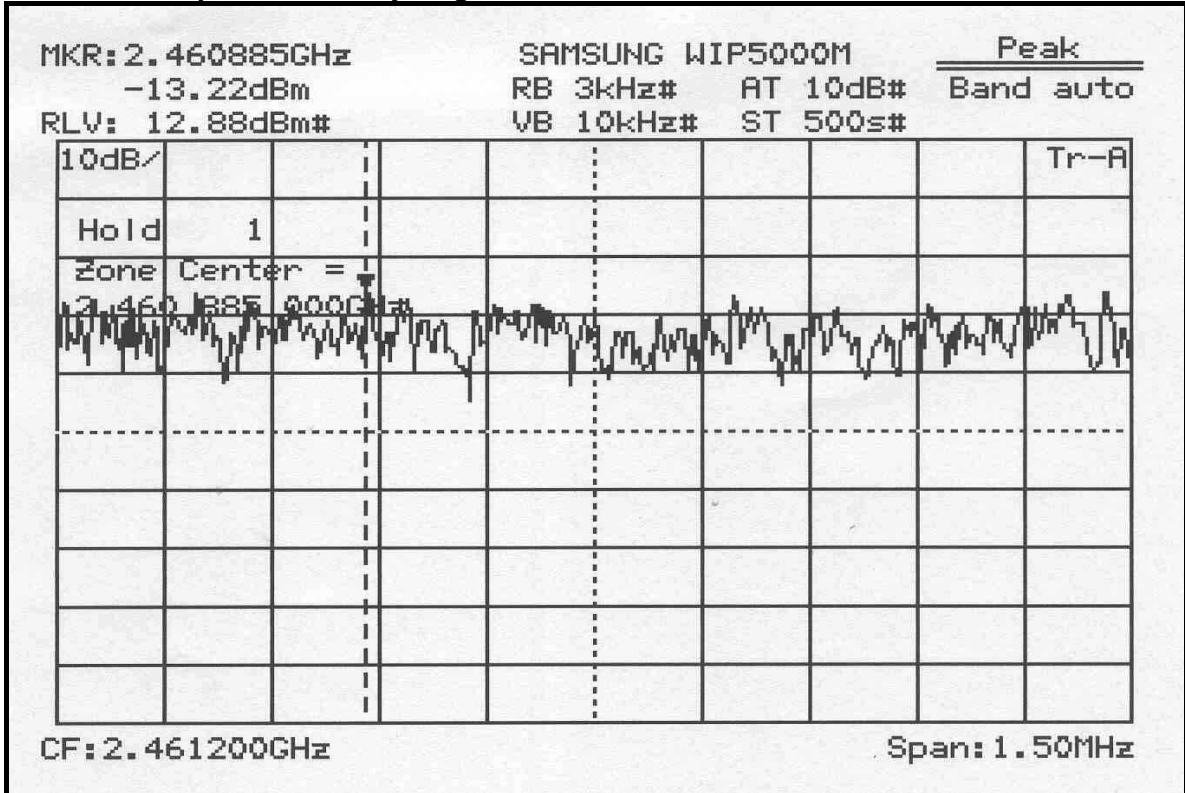

## ***ACCURACY OF MEASUREMENT***

---

The Measurement Uncertainties stated were calculated in accordance with the requirements of NIST Technical Note 1297 with the confidence level of 95%

### ***1. Radiation Uncertainty Calculation***

<b><i>Contribution</i></b>	<b><i>Probability Distribution</i></b>	<b><i>Uncertainty(+/-dB)</i></b>
Antenna Factor	Normal (k=2)	± 0.5
Cable Loss	Normal (k=2)	± 0.04
Receiver Specification	Rectangular	± 2.0
Antenna directivity	Rectangular	± 1.0
Antenna Factor variation with Height		
Antenna Phase Center Variation		
Antenna Factor Frequency Interpolation		
Measurement Distance Variation		
Site Imperfections	Rectangular	± 2.0
Mismatch:Receiver VRC $r_i=0.3$ Antenna VRC $r_R=0.1(B_i)0.4(L_p)$ Uncertainty Limits $20\text{Log}(1+/-r_i r_R)$	U-Shaped	+ 0.25 / - 0.26
System Repeatability	Std.deviation	± 0.05
Repeatability of EUT	-	-
Combined Standard Uncertainty	Normal	± 1.77
Expanded Uncertainty U	Normal (k=2)	± 3.5

### ***2. Conducted Uncertainty Calculation***

<b><i>Contribution</i></b>	<b><i>Probability Distribution</i></b>	<b><i>Uncertainty(+/-dB)</i></b>
Receiver Specification	Normal (k=2)	± 2.0
LISN coupling spec.	Normal (k=2)	± 0.4
Cable and input attenuator cal.	Rectangular	± 0.4
Mismatch:Receiver VRC $r_i=0.3$ LISN vrc $r_g=0.1$ Uncertainty Limits $20\text{Log}(1+/-r_i r_R)$	U-Shaped	± 0.26
System Repeatability	Std.deviation	± 0.68
Repeatability of EUT	-	-
Combined Standard Uncertainty	Normal	± 1.18
Expanded Uncertainty U	Normal (k=2)	± 2.4

## TEST EQUIPMENT

No.	Instrument	Manufacturer	Model	Calibration Date
1	*Test Receiver	R & S	ESCS 30	2003.09
2	Amplifier	HP	8447F	2003.07
3	*Amplifier	HP	8447F	2002.11
4	*Amplifier	HP	8449B	2003.04
5	*Spectrum Analyzer	Advantest	R4136	2003.03
6	*Spectrum Analyzer	H.P	8566B	2003.03
7	*Spectrum Analyzer	Anritsu	MS2668C	2002.12
8	*Logbicon Super Antenna	Schwarzbeck	VULB9166	2003.05
9	Log-Periodic Antenna	R & S	HL025	2003.01
10	Dipole Antenna	R & S	VHA9103	2003.05
11	Dipole Antenna	R & S	UHA9105	2003.05
12	*Biconical Log Antenna	ARA	LPB-2520/A	2003.05
13	Asorbing Clamp	R & S	MDS21	2003.06
14	*Horn Antenna	Schwarzbeck	BBHA 9120D	2003.05
15	Signal Generater	R & S	SMP02	2002.12
16	Matching Pad	R & S	RAM358.5414.02	2003.05
17	*LISN	R & S	ESH3-Z5	2003.10
18	LISN	Kyoritsu	KNW-408	2002.12
19	*LISN	Kyoritsu	KNW-407	2003.04
20	*Position Controller	EM Eng.	N/A	N/A
21	*Turn Table	EM Eng.	N/A	N/A
22	*Antenna Mast	EM Eng.	N/A	N/A
23	*Anechoic Chamber	EM Eng.	N/A	N/A
24	*Shielded Room	EM Eng.	N/A	N/A
25	*Shielded Room	EM Eng.	N/A	N/A
26	*Power Meter	R & S	NRVS	2003.02
27	*Peak Power Sensor	R & S	NRV-Z32	2003.02

\*) Test equipment used during the test

## APPENDIX A – LABELLING REQUIREMENTS

### Labelling Requirements


The sample label shown shall be *permanently affixed* at a conspicuous location on the device and be readily visible to the user at the time of purchase.

FCC ID: A3LWIP5000M

Brand Name: SAMSUNG

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

- **FCC ID Location of EUT**

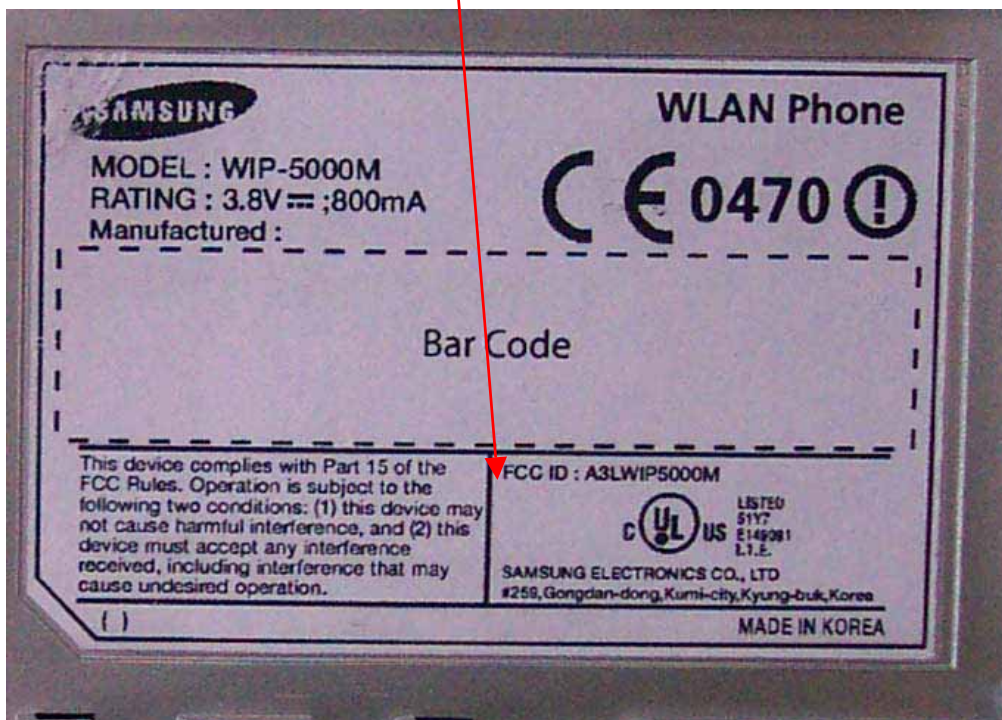

## ***APPENDIX B – CIRCUIT DIAGRAM***

---

## ***APPENDIX E – USER’S MANUAL***

---

## ***APPENDIX F – SCHEMATIC DIAGRAM***

---

## ***APPENDIX G - OPERATING DESCRIPTION***

---

**The EUT is part of transmitter that it is powered by 3.8V batteries.**

**The WIP-5000M is the wireless mobile phone that allows a voice communication through IEEE 802.11b wireless LAN.**

**IP Phone, the voice data is compressed into a packet form(Voice over WLAN) to satisfy the wireless LAN specifications and the data is transferred/receiver through IP network.**

**Supports the wireless LAN specification of IEEE802.11b**

**Supports the message service provide from the phone of OfficeServ 500 System.**

**The wireless method used for the WIP-5000M is the IEEE802.11b Wireless LAN specification at the 2.4Ghzbandwith.**