

# RADIO PERFORMANCE TEST REPORT

Test Report No. : OT-221-RWD-037

Reception No. : 2201000063

Applicant : Samsung Electronics Co Ltd

Address : 19 Chapin Rd., Building D, Pine Brook, New Jersey, 07058, United States

Manufacturer : Samsung Electronics Co Ltd

Address : 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do 16677, Korea

Type of Equipment : Audio Transceiver

FCC ID : A3LWSB520S

Model Name : WSB520S

Multiple Model Name : N/A

Serial number : N/A

Total page of Report : 43 pages (including this page)

Date of Incoming : December 20, 2021

Date of Issuing : January 19, 2022

## SUMMARY

The equipment complies with the requirements of **FCC CFR 47 PART 15 SUBPART C Section 15.249**

This test report contains only the result of a single test of the sample supplied for the examination.


It is not a general valid assessment of the features of the respective products of the mass-production.



Tested by  
Si-eon Lee / Assistant Manager  
ONETECH Corp.



Reviewed by  
Tae-Ho, Kim / Senior Manager  
ONETECH Corp.

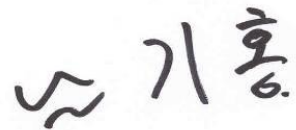

Approved by  
Ki-Hong, Nam / General Manager  
ONETECH Corp.

# CONTENTS

Page

<b>1. VERIFICATION OF COMPLIANCE .....</b>	<b>5</b>
<b>2. TEST SUMMARY.....</b>	<b>6</b>
2.1 TEST ITEMS AND RESULTS .....	6
2.2 RELATED SUBMITTAL(S) / GRANT(S) .....	6
2.3 PURPOSE OF THE TEST .....	6
2.4 TEST METHODOLOGY.....	6
2.5 TEST FACILITY.....	6
<b>3. GENERAL INFORMATION.....</b>	<b>7</b>
3.1 PRODUCT DESCRIPTION.....	7
3.2 ALTERNATIVE TYPE(S)/MODEL(S); ALSO COVERED BY THIS TEST REPORT.....	7
<b>4. EUT MODIFICATIONS.....</b>	<b>7</b>
<b>5. SYSTEM TEST CONFIGURATION .....</b>	<b>8</b>
5.1 JUSTIFICATION.....	8
5.2 PERIPHERAL EQUIPMENT .....	8
5.3 MODE OF OPERATION DURING THE TEST .....	8
5.4 CONFIGURATION OF TEST SYSTEM.....	11
5.5 ANTENNA REQUIREMENT .....	11
<b>6. PRELIMINARY TEST .....</b>	<b>11</b>
6.1 AC POWER LINE CONDUCTED EMISSIONS TESTS.....	11
6.2 RADIATED EMISSIONS TESTS.....	11
<b>7. MINIMUM 20 DB BANDWIDTH.....</b>	<b>12</b>
7.1 OPERATING ENVIRONMENT .....	12
7.2 TEST SET-UP .....	12
7.3 TEST DATE .....	12
7.4 TEST DATA.....	13
<b>8. RADIATED EMISSION TEST .....</b>	<b>15</b>
8.1 OPERATING ENVIRONMENT .....	15
8.2 TEST SET-UP .....	15
8.3 MEASUREMENT UNCERTAINTY .....	15

This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)


ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

<b>8.4 TEST DATE .....</b>	<b>15</b>
<b>8.5 FINAL RESULT OF MEASUREMENT .....</b>	<b>16</b>
<i>8.5.1 Field Strength of the Fundamental Frequency .....</i>	<i>16</i>
<i>8.5.2 Emissions Radiated Outside of the Specified Frequency Bands_ Harmonic .....</i>	<i>23</i>
<i>8.5.3 Test Data for Frequency range: 30 MHz ~ 1 000 MHz.....</i>	<i>30</i>
<i>8.5.4 Test Data for Below 30 MHz .....</i>	<i>31</i>
<i>8.5.5 Test Data above 1 GHz except for harmonic .....</i>	<i>31</i>
<i>8.5.6 Band Edge.....</i>	<i>32</i>
<b>9. CONDUCTED EMISSION TEST.....</b>	<b>40</b>
<b>9.1 OPERATING ENVIRONMENT .....</b>	<b>40</b>
<b>9.2 TEST SET-UP .....</b>	<b>40</b>
<b>9.3 TEST DATE .....</b>	<b>40</b>
<b>9.4 TEST DATA.....</b>	<b>41</b>
<b>10. LIST OF TEST EQUIPMENT .....</b>	<b>43</b>

**Revision History**

Rev. No.	Issue Report No.	Issued Date	Revisions	Section Affected
0	OT-221-RWD-037	January 19, 2022	Initial Release	All

## 1. VERIFICATION OF COMPLIANCE

Applicant : Samsung Electronics Co Ltd  
 Address : 19 Chapin Rd., Building D, Pine Brook, New Jersey, 07058, United States  
 Contact Person : Hansung You / Staff Engineer  
 Telephone No. : +82-31-277-2746  
 FCC ID : A3LWSB520S  
 Model Name : WSB520S  
 Brand Name :   
 Serial Number : N/A  
 Date : January 19, 2022

DEVICE TYPE	DXX – Low Power Communication Device Transmitter
E.U.T. DESCRIPTION	Modular Transmitter, Audio Transceiver
THIS REPORT CONCERNS	Original Grant
MEASUREMENT PROCEDURES	ANSI C63.10: 2020
TYPE OF EQUIPMENT TESTED	Pre-Production
KIND OF EQUIPMENT AUTHORIZATION REQUESTED	Certification
EQUIPMENT WILL BE OPERATED UNDER FCC RULES PART(S)	FCC CFR47 Part 15 Subpart C Section 15.249
MODIFICATIONS ON THE EQUIPMENT TO ACHIEVE COMPLIANCE	None
FINAL TEST WAS CONDUCTED ON	3 m Semi Anechoic Chamber

-. The above equipment was tested by ONETECH Corp. for compliance with the requirement set forth in the FCC Rules and Regulations. This said equipment in the configuration described in this report, shows the maximum emission levels emanating from equipment are within the compliance requirements.

## 2. TEST SUMMARY

### 2.1 Test items and results

SECTION	TEST ITEMS	RESULTS
15.249 (a)	Field Strength of Emission	Met the Limit / PASS
15.249 (c)	Measurement distance	Met the Requirement / PASS
15.249 (d)	Emissions Radiated Outside of the Specified Frequency Band	Met the Limit / PASS
15.249, 15.215	Minimum 20 dB Bandwidth	Met the Limit / PASS
15.249 (e)	Radiated Emissions above 1 000 MHz	Met the Limit / PASS
15.209	Radiated Emission Limits, General Requirement	Met the Limit / PASS
15.207	Conducted Limits	Met the Limit / PASS
15.203	Antenna Requirement	Met the Requirement / PASS

### 2.2 Related Submittal(s) / Grant(s)

Original submittal only

### 2.3 Purpose of the test

To determine whether the equipment under test fulfills the requirements of the regulation stated in section 2.1.

### 2.4 Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10: 2020. Radiated testing was performed at a distance of 3 m from EUT to the antenna.

### 2.5 Test Facility

The Onetech Corp. has been designated to perform equipment testing in compliance with ISO/IEC 17025.

The Electromagnetic compatibility measurement facilities are located at 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea.

-. Site Filing:

VCCI (Voluntary Control Council for Interference) – Registration No. R-20122/ C-14617/ G-10666/ T-11842

ISED (Innovation, Science and Economic Development Canada) – Registration No. Site# 3736A-3

KOLAS (Korea Laboratory Accreditation Scheme) - Accreditation NO. KT085

FCC (Federal Communications Commission) - Accreditation No. KR0013

RRA (Radio Research Agency) – Designation No. KR0013

### 3. GENERAL INFORMATION

#### 3.1 Product Description

The Samsung Electronics Co Ltd, Model WSB520S (referred to as the EUT in this report) is an Audio Transceiver, Product specification information described herein was obtained from product data sheet or user's manual.

DEVICE TYPE	Audio Transceiver	
Temperature Range	-5 °C ~ 40 °C	
OPERATING FREQUENCY	5 773.35 MHz ~ 5 871.35 MHz	
MODULATION TYPE	DQPSK	
Field Strength of Fundamental	95.65 dBμV/m at 3 m	
ANTENNA TYPE	PCB Antenna	
ANTENNA GAIN	Antenna 0	2.8 dBi
	Antenna 1	2.8 dBi
List of each Osc. or crystal Freq.(Freq. >= 1 MHz)	16 MHz	

Note: This Device works a Diversity Antenna. So, We Tested only Antenna 0.

#### 3.2 Alternative type(s)/model(s); also covered by this test report.

-. None

### 4. EUT MODIFICATIONS

-. None

## 5. SYSTEM TEST CONFIGURATION

### 5.1 Justification

This device was configured for testing in a typical way as a normal customer is supposed to be used. During the test, the following components were installed inside of the EUT.

DEVICE TYPE	MANUFACTURER	MODEL/PART NUMBER	FCC ID
Main Board	Samsung Electronics Co Ltd	AVM600 REV01	N/A

### 5.2 Peripheral equipment

Defined as equipment needed for correct operation of the EUT, but not considered as tested:

Model	Manufacturer	Description	Connected to
WSB520S	Samsung Electronics Co Ltd	Audio Transceiver (EUT)	-
AVM500 ANTEATER REV01	N/A	Jig Board	EUT / Notebook PC
HP PROBOOK	HP	Notebook PC	EUT
TPN-AA05	ACBEL ELECTRONIC (WUHAN) CO., LTD	AC Adapter	-

### 5.3 Mode of operation during the test

For the testing, software used to control the EUT for staying in continuous transmitting is programmed.

For final testing, the EUT was set at 5 773.35 MHz, 5 821.35 MHz, and 5 871.35 MHz to get a maximum emission levels from the EUT. The EUT was moved throughout the XY, XZ, and YZ planes and the worst case is “XY” axis, but the worst data was recorded in this report.




### -. Duty Cycle

Mode	Tx On Time [ ms ]	Tx Off Time [ ms ]	Duty Cycle [ % ]	Correction Factor [ dB ]
-	-	-	100.00	-

Note – Duty Cycle : (Tx On Time / (Tx On Time + Tx Off Time)) \* 100

Correction Factor :  $10 * \log(1 / (\text{Duty Cycle} / 100))$

### -. Test Plot

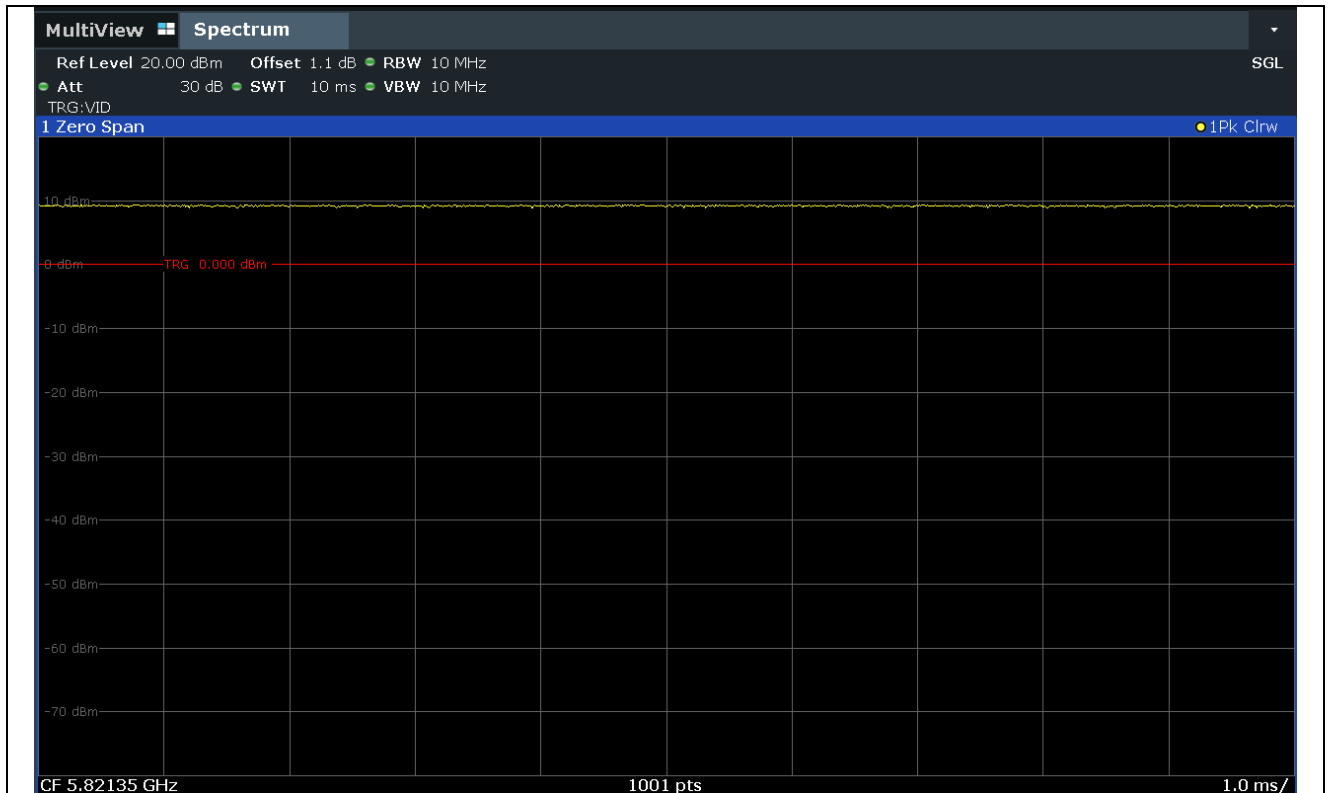

# -. Channel List

Channel	Frequency[MHz]	Channel	Frequency[MHz]	Channel	Frequency[MHz]
0	5 773.35	18	5 809.35	36	5 845.35
1	5 775.35	19	5 811.35	37	5 847.35
2	5 777.35	20	5 813.35	38	5 849.35
3	5 779.35	21	5 815.35	39	5 851.35
4	5 781.35	22	5 817.35	40	5 853.35
5	5 783.35	23	5 819.35	41	5 855.35
6	5 785.35	24	5 821.35	42	5 857.35
7	5 787.35	25	5 823.35	43	5 859.35
8	5 789.35	26	5 825.35	44	5 861.35
9	5 791.35	27	5 827.35	45	5 863.35
10	5 793.35	28	5 829.35	46	5 865.35
11	5 795.35	29	5 831.35	47	5 867.35
12	5 797.35	30	5 833.35	48	5 869.35
13	5 799.35	31	5 835.35	49	5 871.35
14	5 801.35	32	5 837.35		
15	5 803.35	33	5 839.35		
16	5 805.35	34	5 841.35		
17	5 807.35	35	5 843.35		

## 5.4 Configuration of Test System

**Line Conducted Test:** The EUT was connected to USB and the power of USB was connected to Notebook PC. All supporting equipments were connected to another LISN. Preliminary Power line Conducted Emission test was performed by using the procedure in ANSI C63.10: 2020 to determine the worse operating conditions.

**Radiated Emission Test :** Preliminary radiated emissions test were conducted using the procedure in ANSI C63.10: 2020 to determine the worse operating conditions. The radiated emissions measurements were performed on the 10 m Semi Anechoic Chamber.  
For frequencies from 150 kHz to 30 MHz measurements were made of the magnetic H field. The measuring antenna is an electrically screened loop antenna.  
The frequency spectrum from 30 MHz to 1 000 MHz was scanned and maximum emission levels maximized at each frequency recorded. The system was rotated 360°, and the antenna was varied in the height between 1.0 m and 4.0 m in order to determine the maximum emission levels. This procedure was performed for both horizontal and vertical polarization of the receiving antenna.

## 5.5 Antenna Requirement

For intentional device, according to section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

### Antenna Construction:

The antenna of the EUT is PCB Antenna on the main board in the EUT, so no consideration of replacement by the user.

## 6. PRELIMINARY TEST

### 6.1 AC Power line Conducted Emissions Tests

During Preliminary Tests, the following operating modes were investigated

Operation Mode	The Worse operating condition (Please check one only)
Transmitting Mode	X

### 6.2 Radiated Emissions Tests

During Preliminary Tests, the following operating modes were investigated

Operation Mode	The Worse operating condition (Please check one only)
Transmitting Mode	X

## 7. MINIMUM 20 dB BANDWIDTH

### 7.1 Operating environment

Temperature : 22 °C  
Relative humidity : 46 % R.H.

### 7.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The resolution bandwidth is set to 50 kHz, and peak detection was used. The 20 dB bandwidth is defined as the total spectrum over which the power is higher than the peak power minus 20 dB.



### 7.3 Test Date


December 20, 2021 ~ December 24, 2021


## 7.4 Test data

-. Test Result : Pass

CHANNEL	FREQUENCY(MHz)	MEASURED VALUE (MHz)
Low	5 773.35	4.46
Middle	5 821.35	4.45
High	5 871.35	4.45

Remark. Margin = Measured Value - Limit

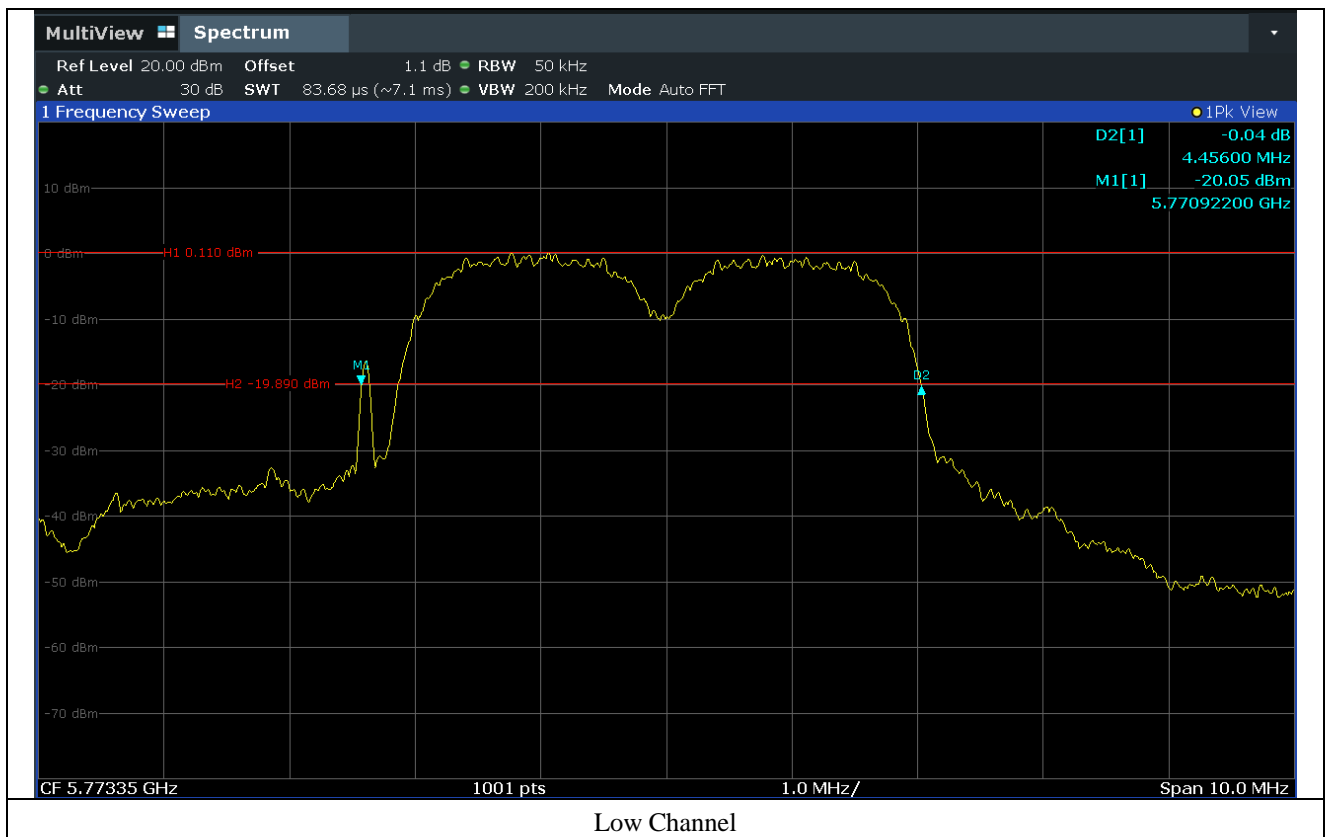

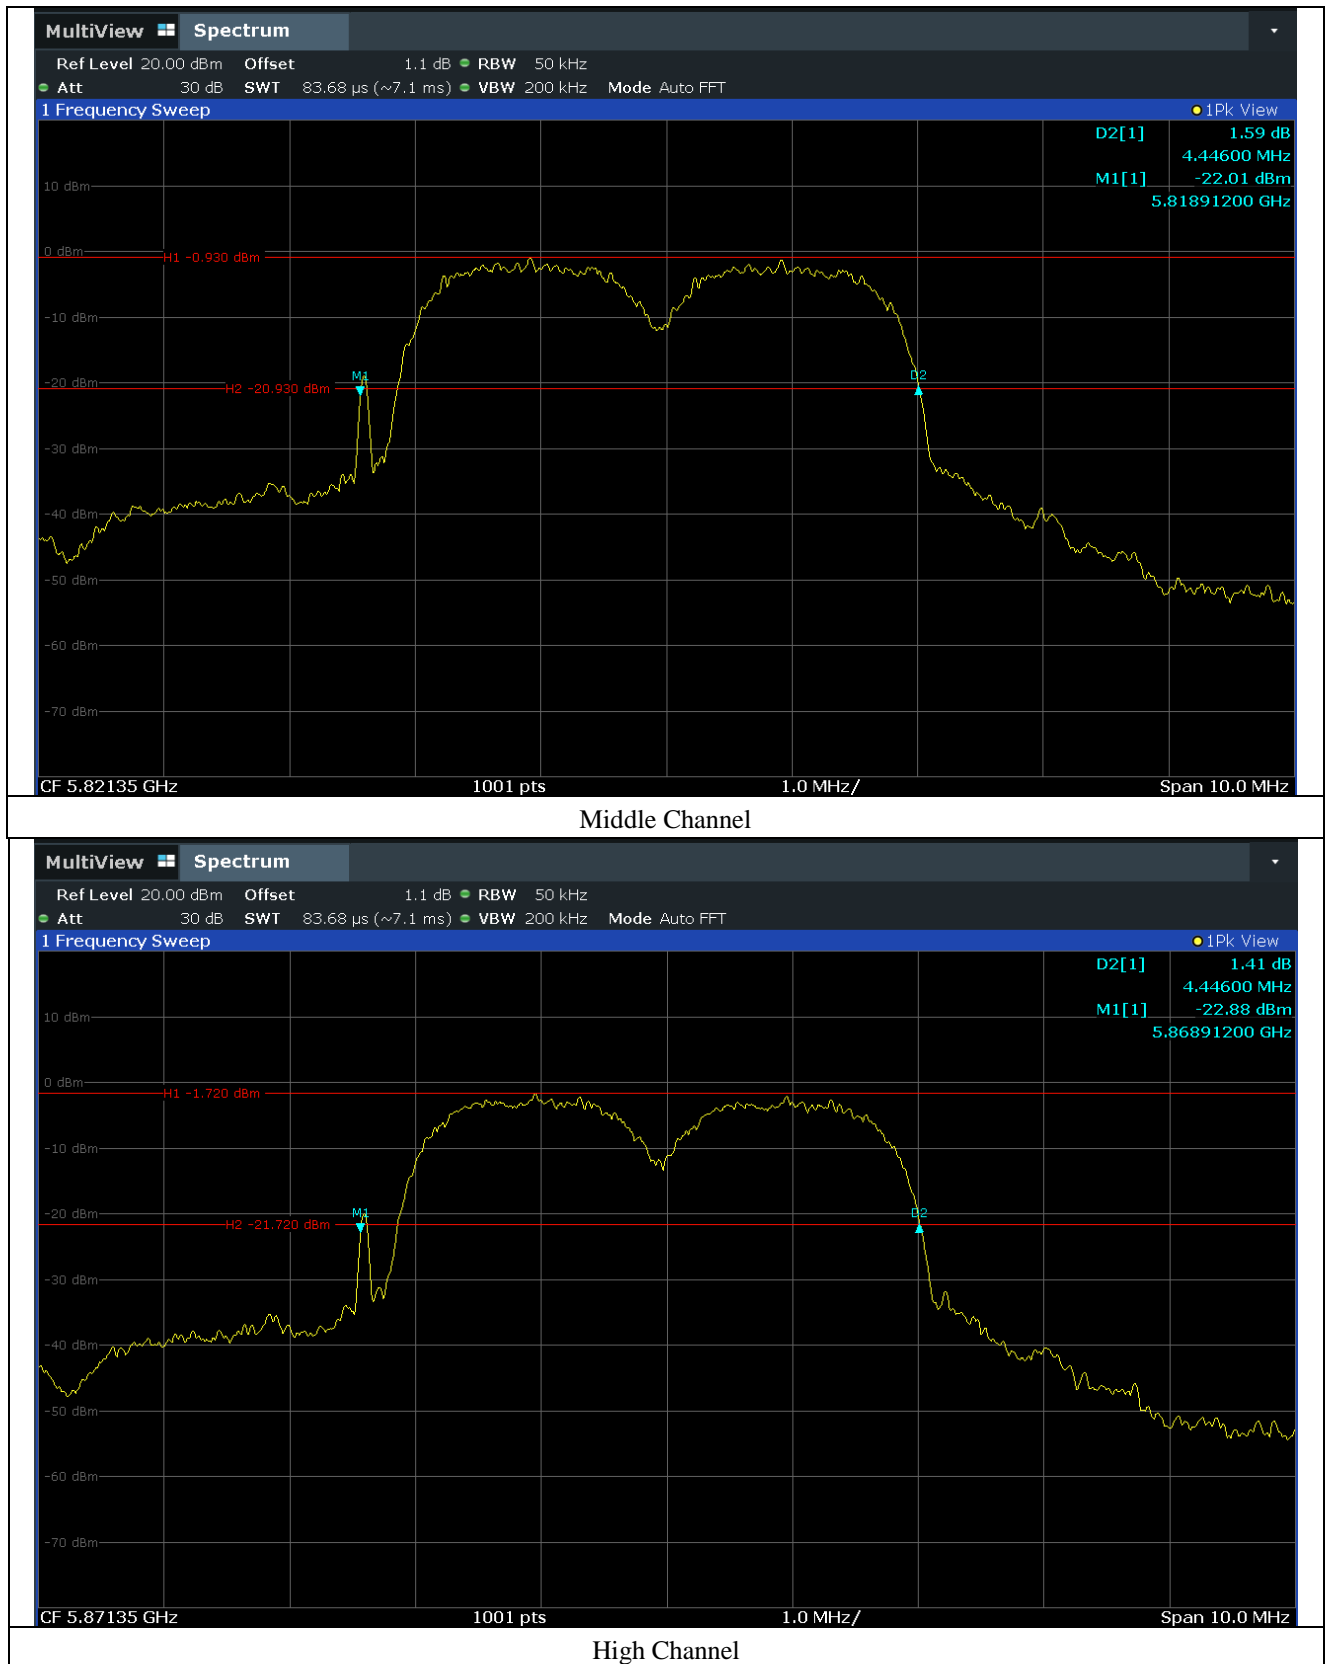

This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

## 8. RADIATED EMISSION TEST

### 8.1 Operating environment

Temperature : 22 °C  
Relative humidity : 46 % R.H.

### 8.2 Test set-up

The radiated emissions measurements were on the 3 m, semi anechoic chamber. The EUT and other support equipment were placed on a non-conductive turntable above the ground plane. The interconnecting cables from outside test site were inserted into ferrite clamps at the point where the cables reach the turntable.

The frequency spectrum from up to 40 GHz was scanned and emission levels maximized at each frequency recorded. The system was rotated 360°, and the antenna was varied in height between 1.0 m and 4.0 m in order to determine the maximum emission levels. This procedure was performed for both horizontal and vertical polarization of the receiving antenna.

Test set-up photos are included in appendix I.

### 8.3 Measurement uncertainty

Radiated emission electric field intensity, 0.15 MHz ~ 30 MHz :  $\pm 2.61$  dB

Radiated emission electric field intensity, 30 MHz ~ 300 MHz :  $\pm 4.43$  dB

Radiated emission electric field intensity, 300 MHz ~ 1 000 MHz :  $\pm 3.80$  dB

Radiated emission electric field intensity, 1 000 MHz ~ 3 000 MHz:  $\pm 4.40$  dB

Measurement uncertainty is calculated in accordance with CISPR 16-4-2. The measurement uncertainty is given with a confidence of 95 % with the coverage factor,  $k = 2$ .

### 8.4 Test Date

December 20, 2021 ~ December 24, 2021

## 8.5 Final Result of Measurement

### 8.5.1 Field Strength of the Fundamental Frequency

The following table shows the highest levels of radiated emissions on both polarizations of horizontal and vertical.

Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.249(a)

Result : PASSED

EUT : Audio Transceiver

Operating Condition : TX mode

Distance : 3 m


Radiated Emissions			Ant	Correction Factors			Total	FCC Limit	
Carrier Freq. (MHz)	Reading (dBμV)	Detector Mode	Pol.	Antenna (dB/m)	Cable Loss (dB)	Amp Gain	Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
Test Data for Low Channel									
5 773.35	97.94	Peak	H	34.30	8.60	45.19	95.65	114.00	18.35
	95.16	Average	H	34.30	8.60	45.19	92.87	94.00	1.13
	97.70	Peak	V	34.30	8.60	45.19	95.41	114.00	18.59
	94.83	Average	V	34.30	8.60	45.19	92.54	94.00	1.46
Test Data for Middle Channel									
5 821.35	97.43	Peak	H	34.40	8.70	45.19	95.34	114.00	18.66
	94.85	Average	H	34.40	8.70	45.19	92.76	94.00	1.24
	97.12	Peak	V	34.40	8.70	45.19	95.03	114.00	18.97
	94.30	Average	V	34.40	8.70	45.19	92.21	94.00	1.79
Test Data for High Channel									
5 871.35	97.32	Peak	H	34.60	8.80	45.19	95.53	114.00	18.47
	94.53	Average	H	34.60	8.80	45.19	92.74	94.00	1.26
	97.15	Peak	V	34.60	8.80	45.19	95.36	114.00	18.64
	94.19	Average	V	34.60	8.80	45.19	92.40	94.00	1.60

\*Remark: To get a maximum emission level from the EUT, the EUT was moved throughout the XY, XZ, and YZ planes, but the worst plane data were recorded in the report.


Margin (dB) = Limit (dBμV/m) – Total (dBμV/m)

Total = Reading + Antenna Factor + Cable Loss – Amp Gain



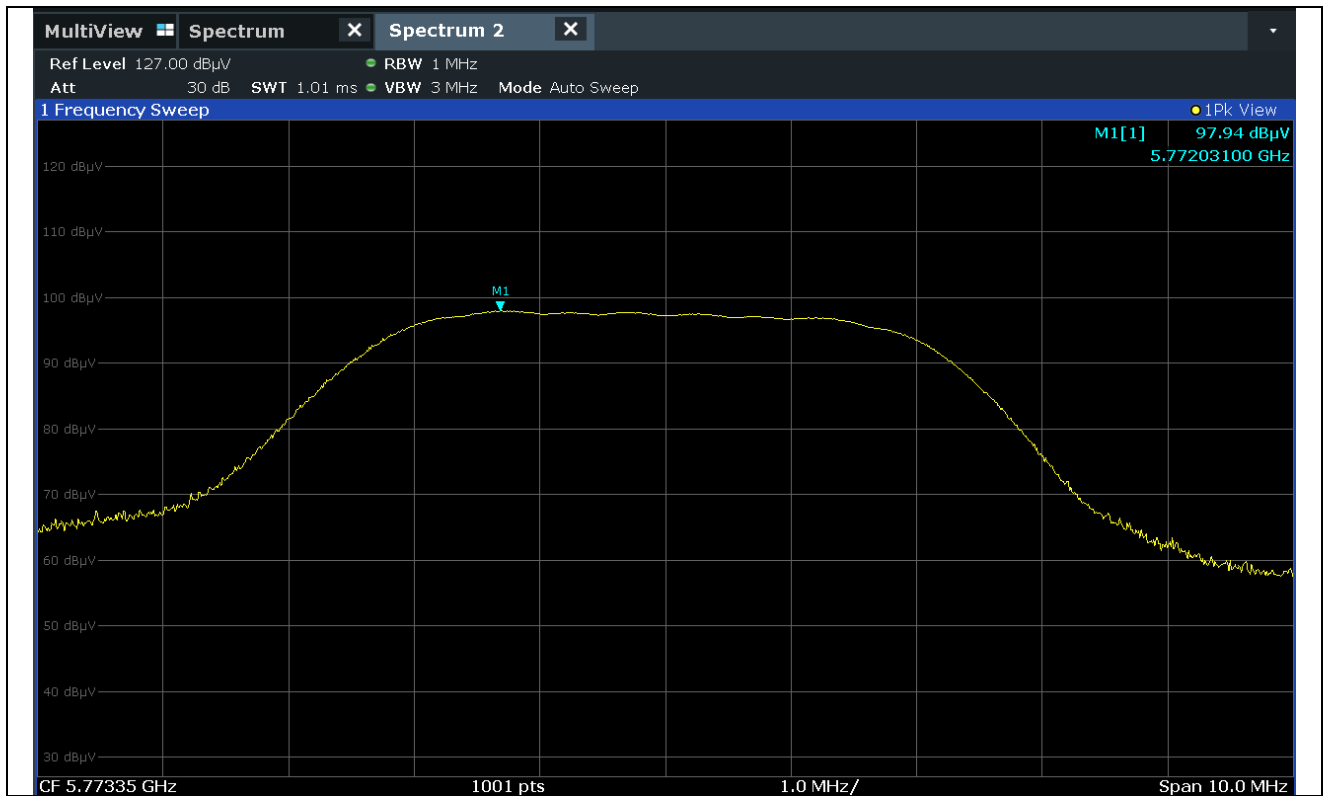

Low Channel\_Peak\_H

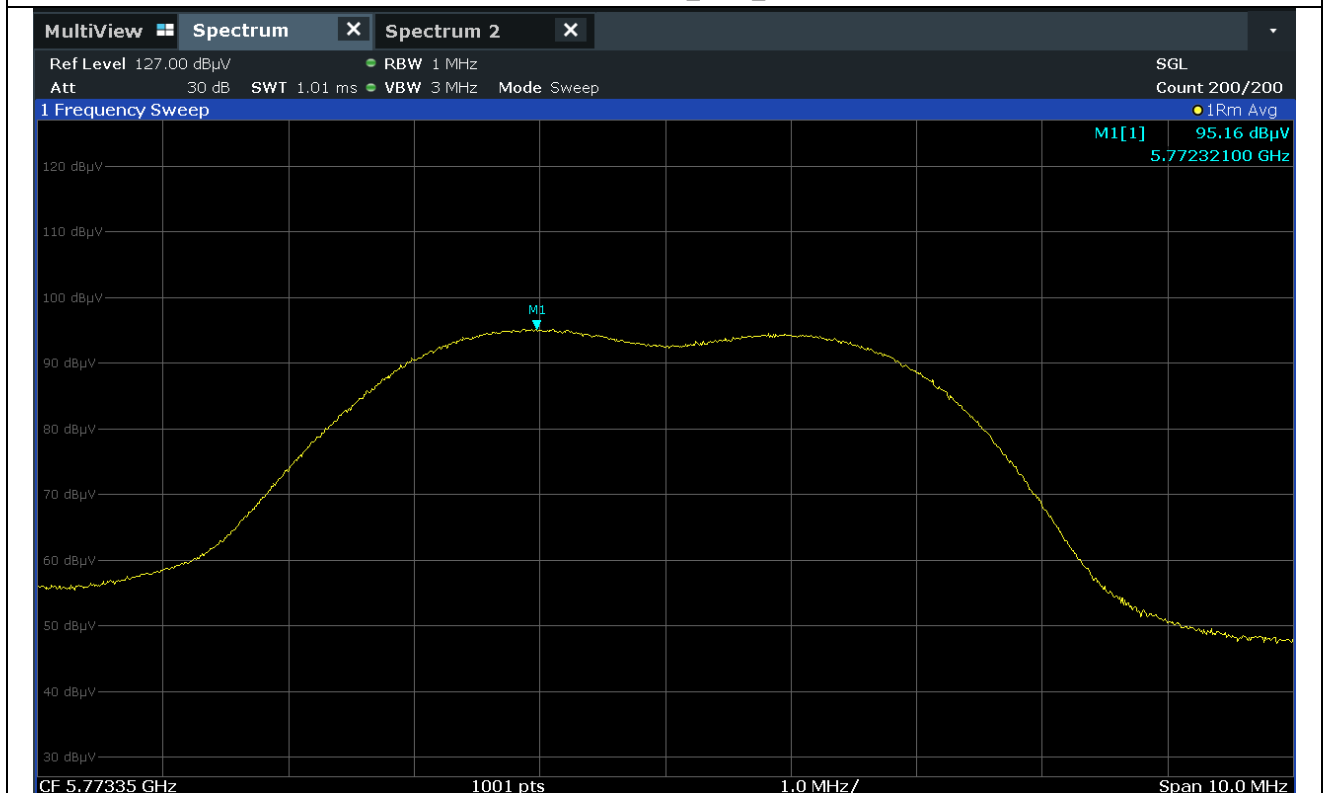


Low Channel\_Average\_H

This Report is not correlated with the authentication of KOLAS


It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

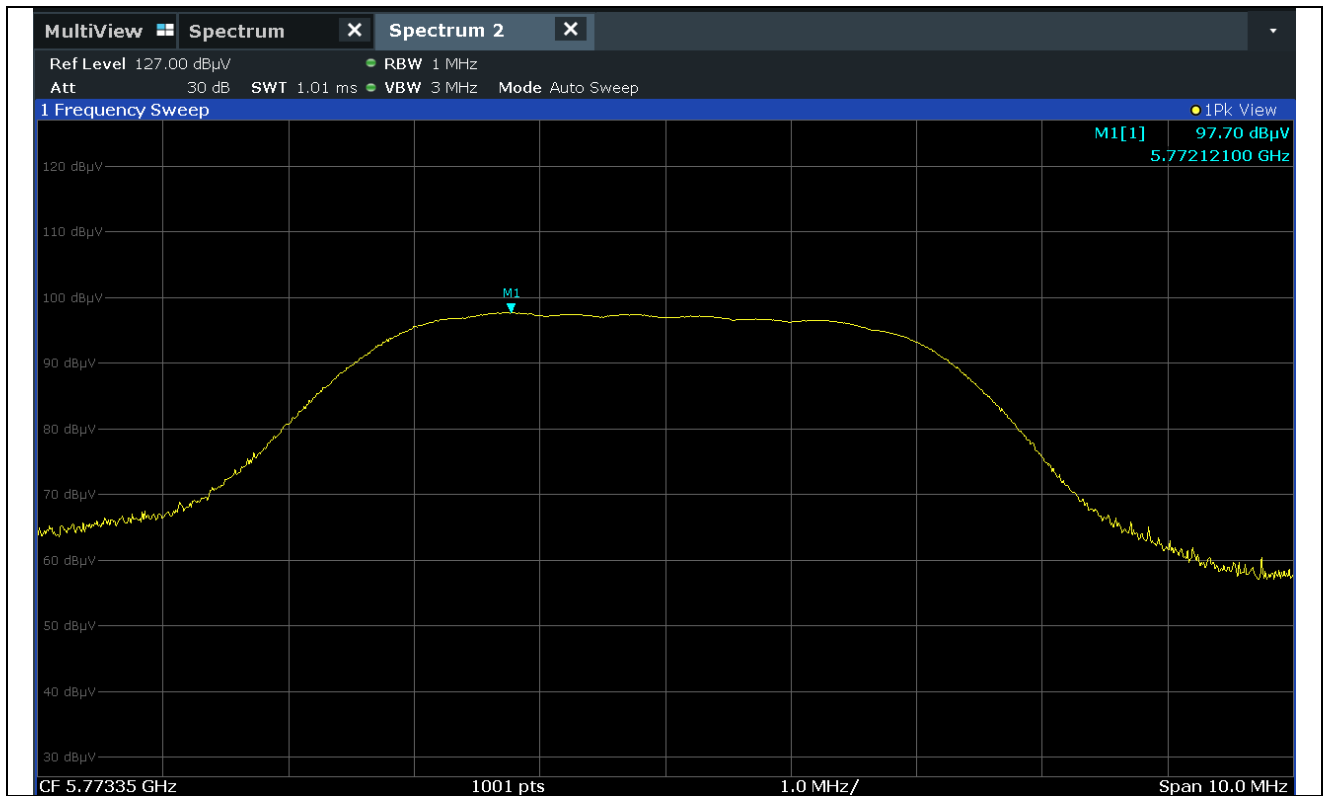

Low Channel\_Peak\_V

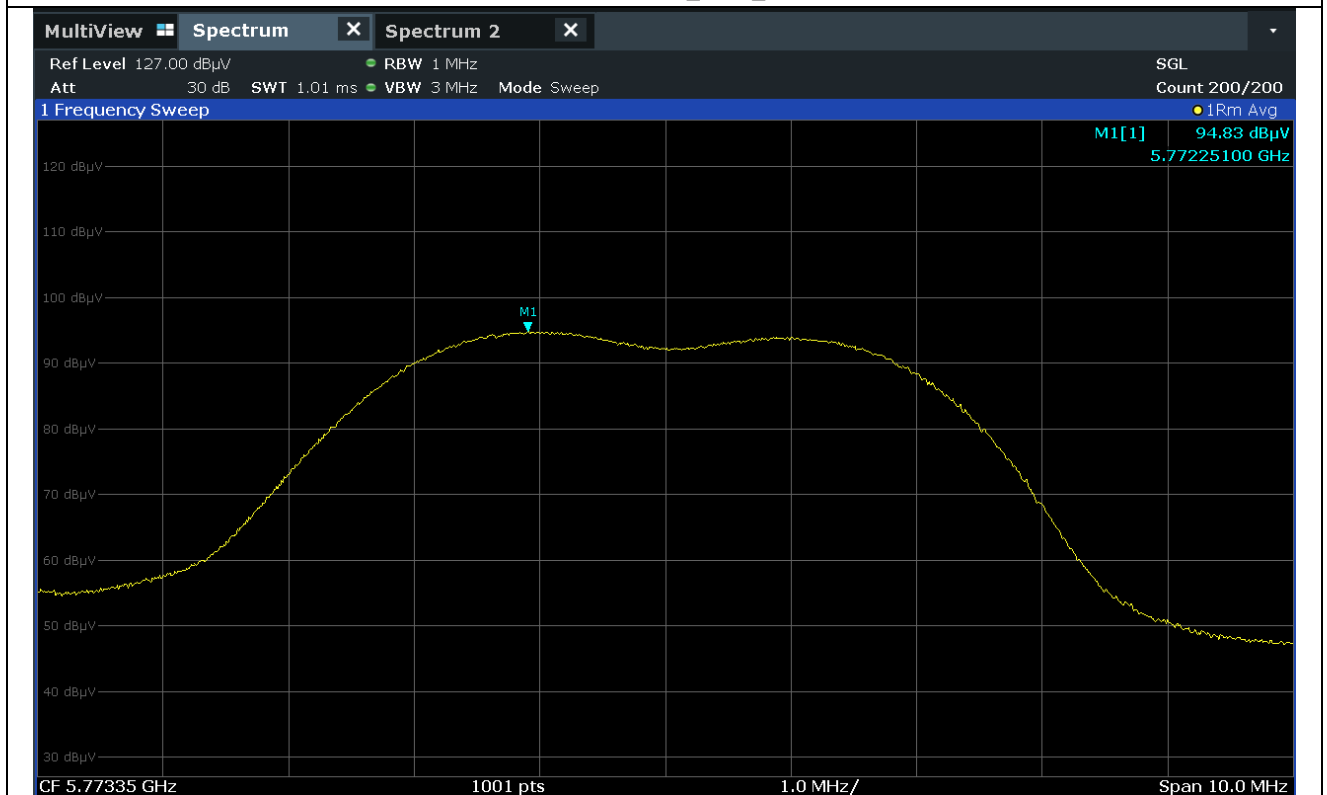


Low Channel\_Average\_V

This Report is not correlated with the authentication of KOLAS


It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

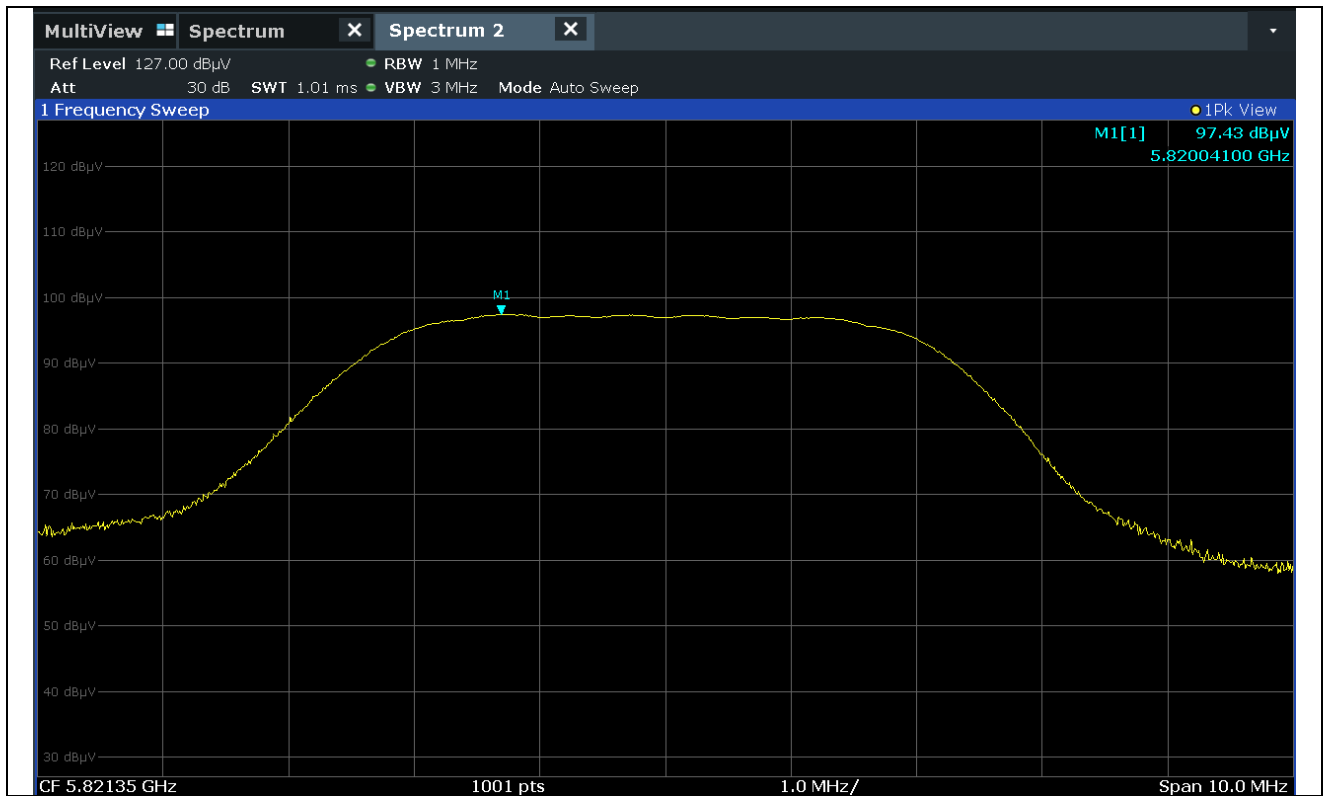

Middle Channel\_Peak\_H

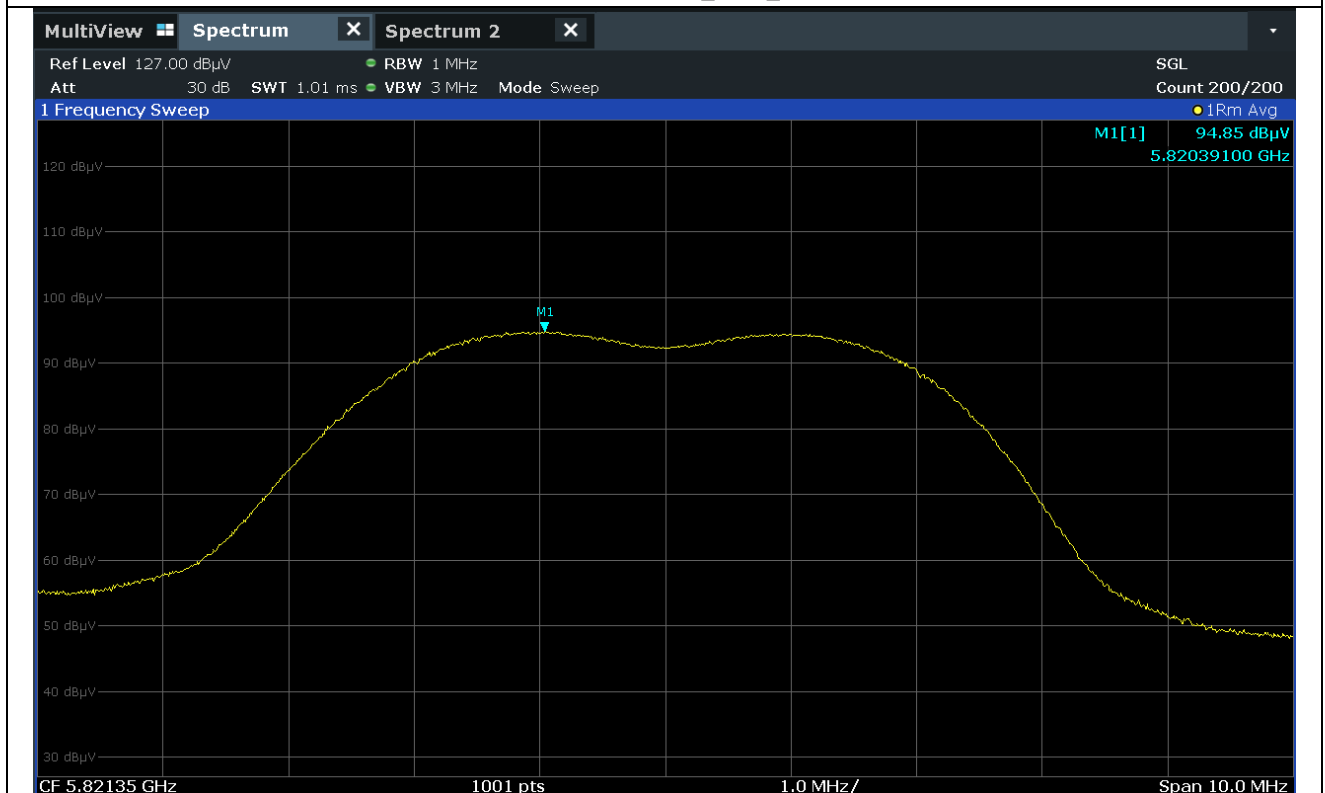


Middle Channel\_Average\_H

This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

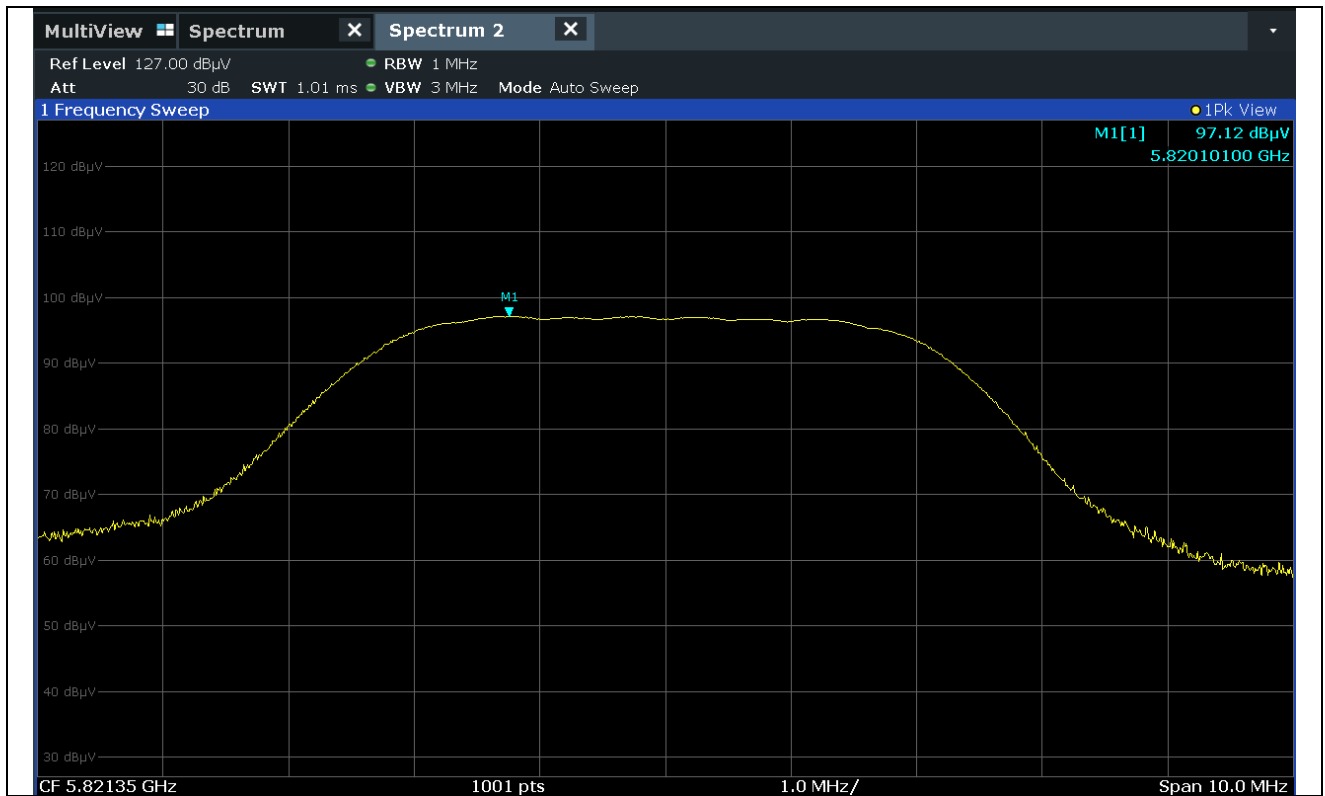

Middle Channel\_Peak\_V





Middle Channel\_Average\_V

This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

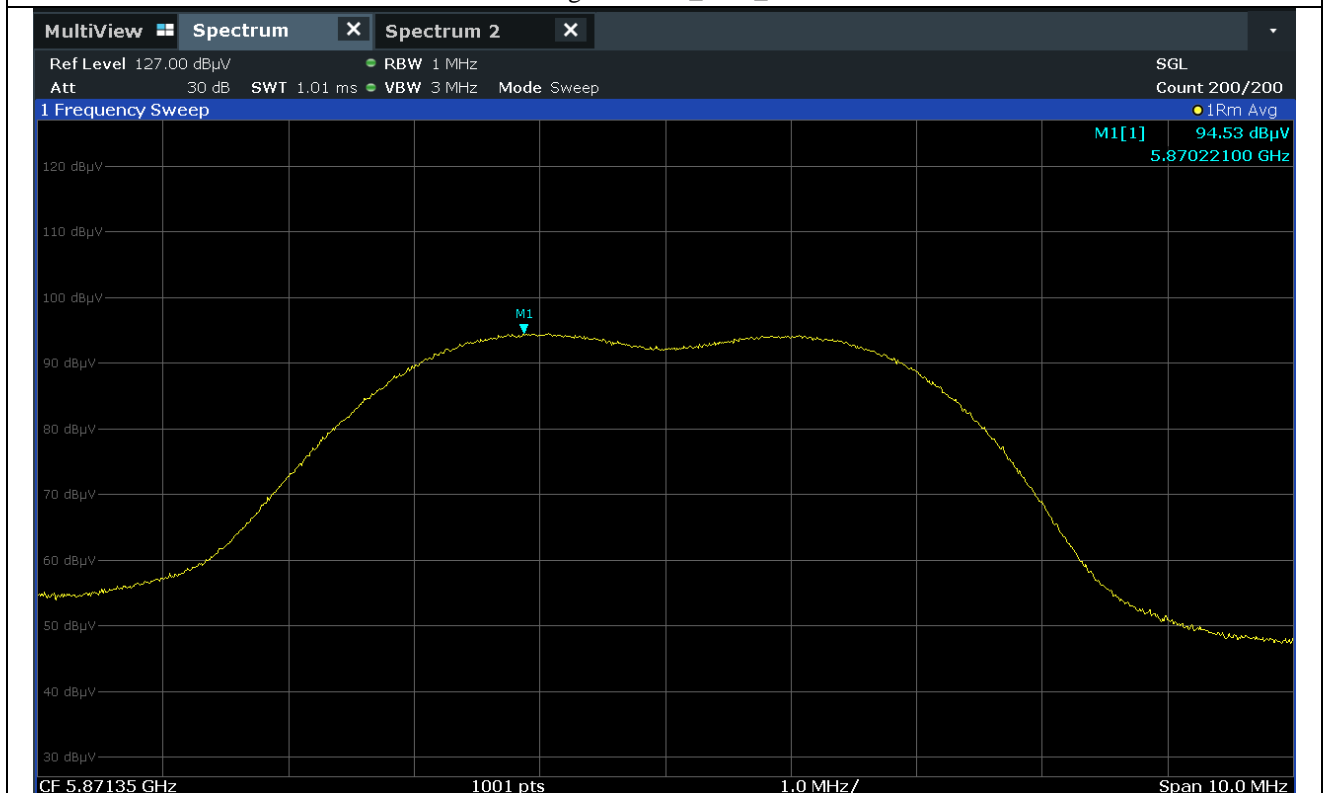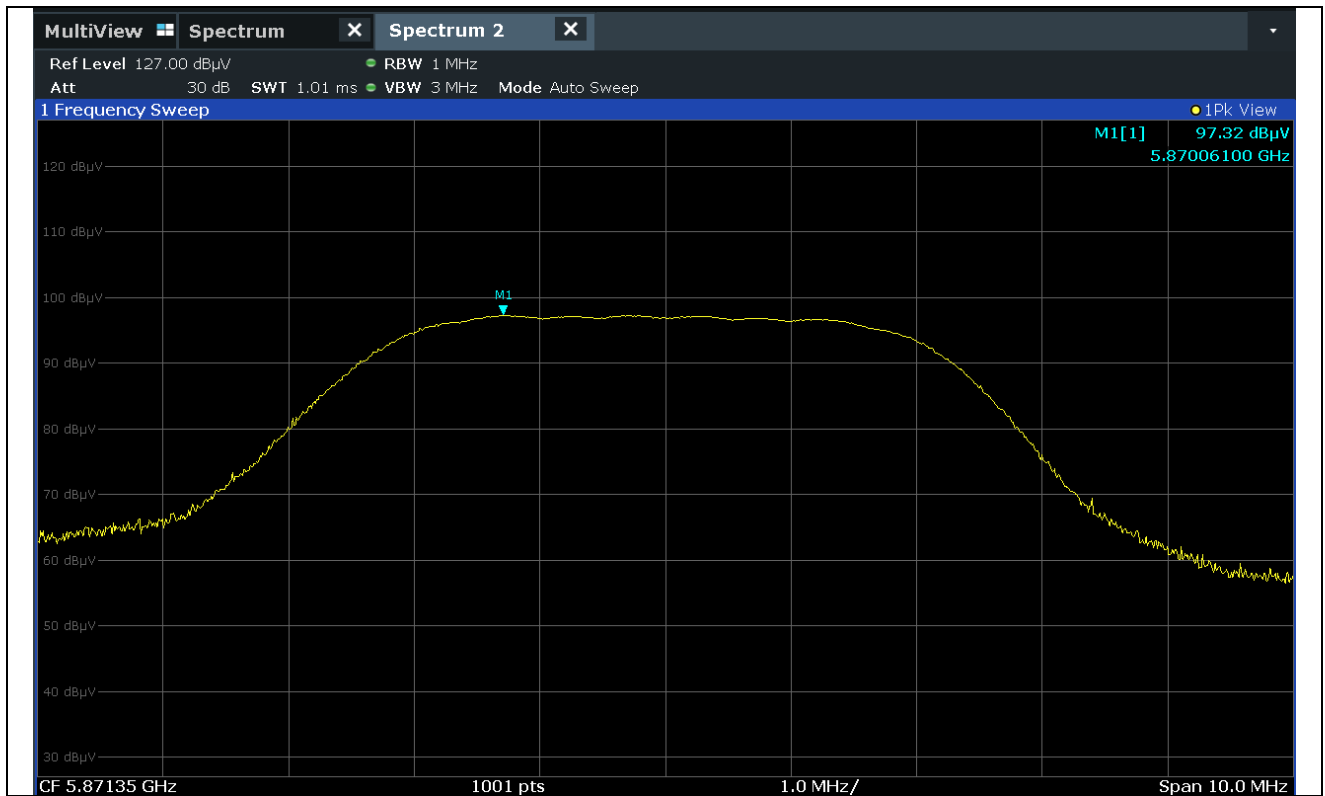


This Report is not correlated with the authentication of KOLAS


It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

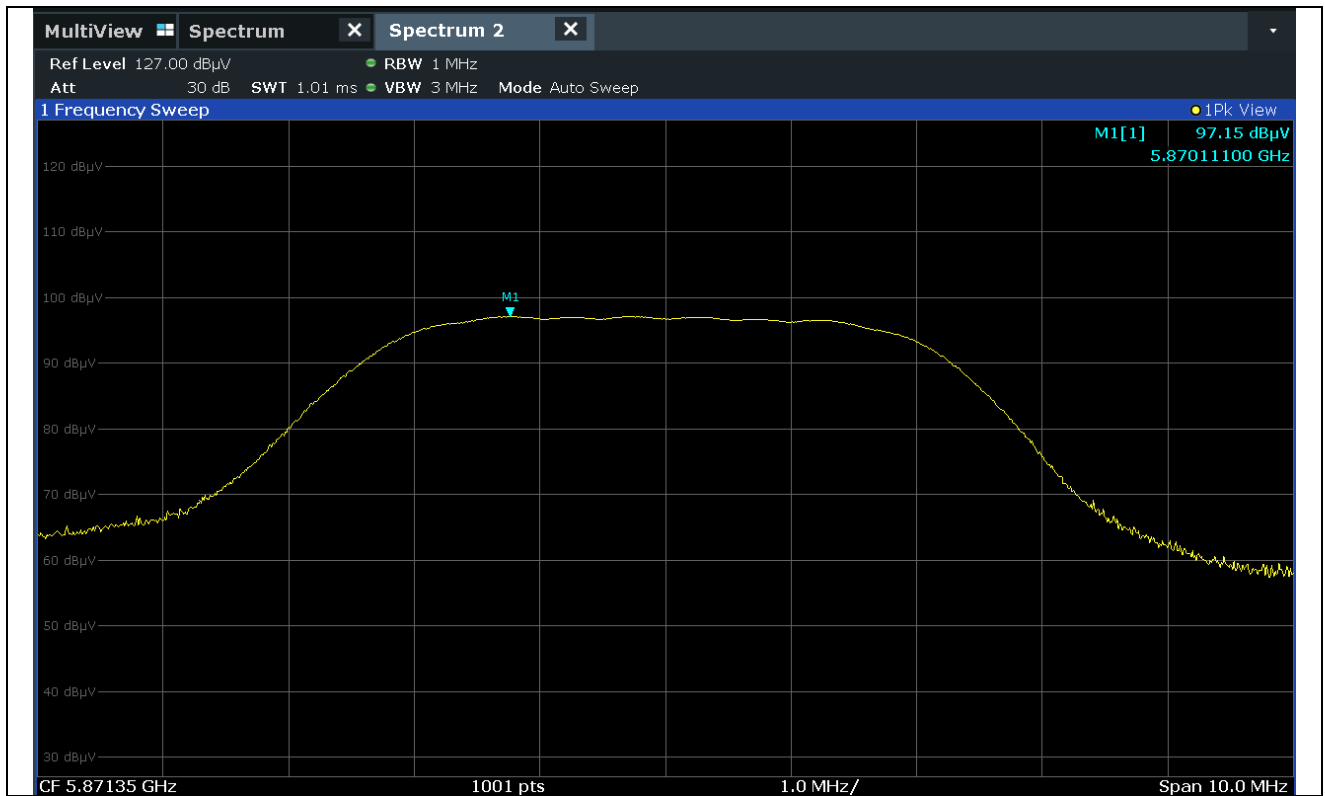

High Channel\_Peak\_V

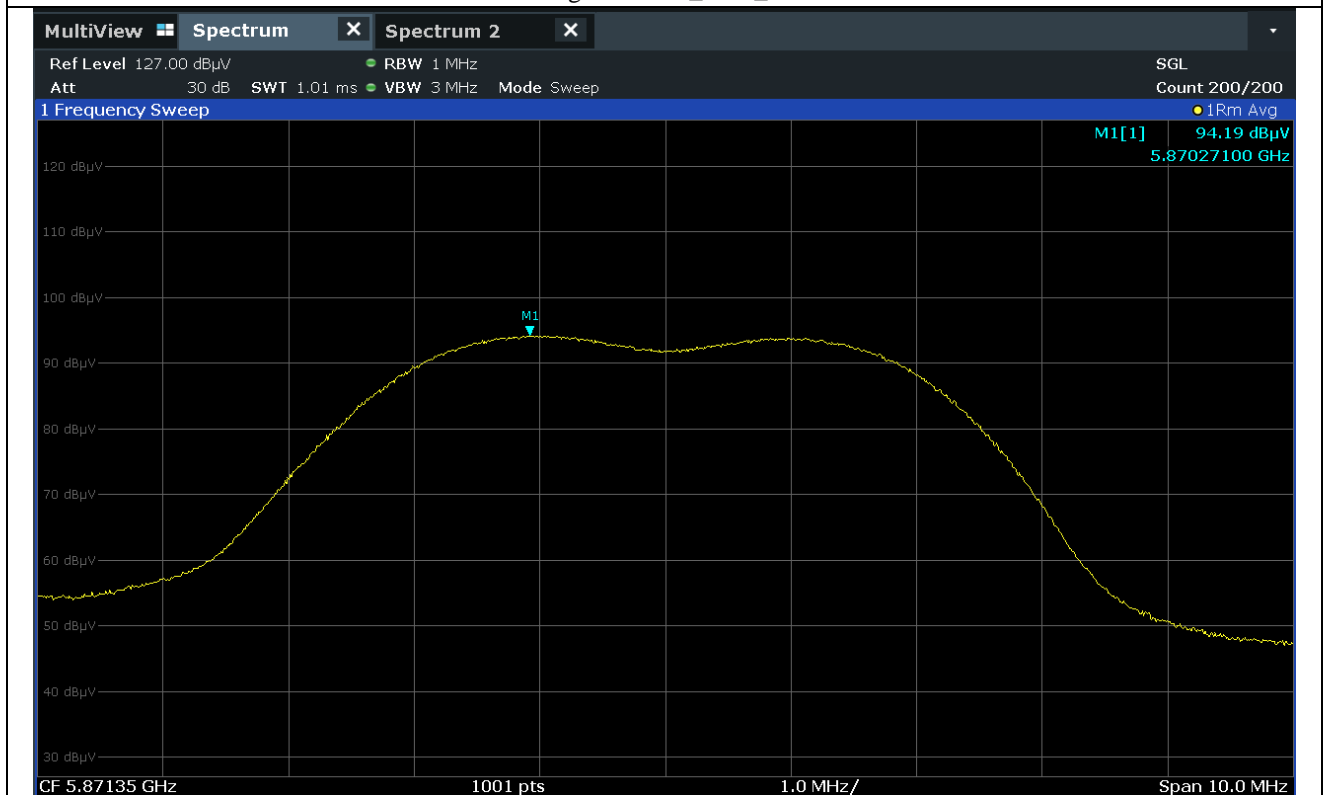

High Channel\_Average\_V

This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

### 8.5.2 Emissions Radiated Outside of the Specified Frequency Bands\_ Harmonic

Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.249(a)

Result : PASSED

EUT : Audio Transceiver

Operating Condition : TX mode

Distance : 3 m


Radiated Emissions			Ant	Correction Factors			Total	FCC Limit	
Carrier Freq. (MHz)	Reading (dBμV)	Detector Mode	Pol.	Antenna (dB/m)	Cable Loss (dB)	Amp Gain	Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
Test Data for Low Channel									
11 546.70	53.15	Peak	H	39.60	12.80	46.09	59.46	74.00	14.54
	41.74	Average	H	39.60	12.80	46.09	48.05	54.00	5.95
	53.02	Peak	V	39.60	12.80	46.09	59.33	74.00	14.67
	41.69	Average	V	39.60	12.80	46.09	48.00	54.00	6.00
Test Data for Middle Channel									
11 642.70	53.55	Peak	H	39.90	12.85	46.09	60.21	74.00	13.79
	41.72	Average	H	39.90	12.85	46.09	48.38	54.00	5.62
	53.21	Peak	V	39.90	12.85	46.09	59.87	74.00	14.13
	41.52	Average	V	39.90	12.85	46.09	48.18	54.00	5.82
Test Data for High Channel									
11 742.70	52.78	Peak	H	40.20	12.90	46.51	59.37	74.00	14.63
	41.50	Average	H	40.20	12.90	46.51	48.09	54.00	5.91
	52.57	Peak	V	40.20	12.90	46.51	59.16	74.00	14.84
	41.40	Average	V	40.20	12.90	46.51	47.99	54.00	6.01
Other frequencies were not found up to 10 GHz.									

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical, "\*" Frequency fall in restricted band

Margin (dB) = Limit (dBuV/m) – Total (dBuV/m)

Total = Reading + Antenna Factor + Cable Loss – Amp Gain

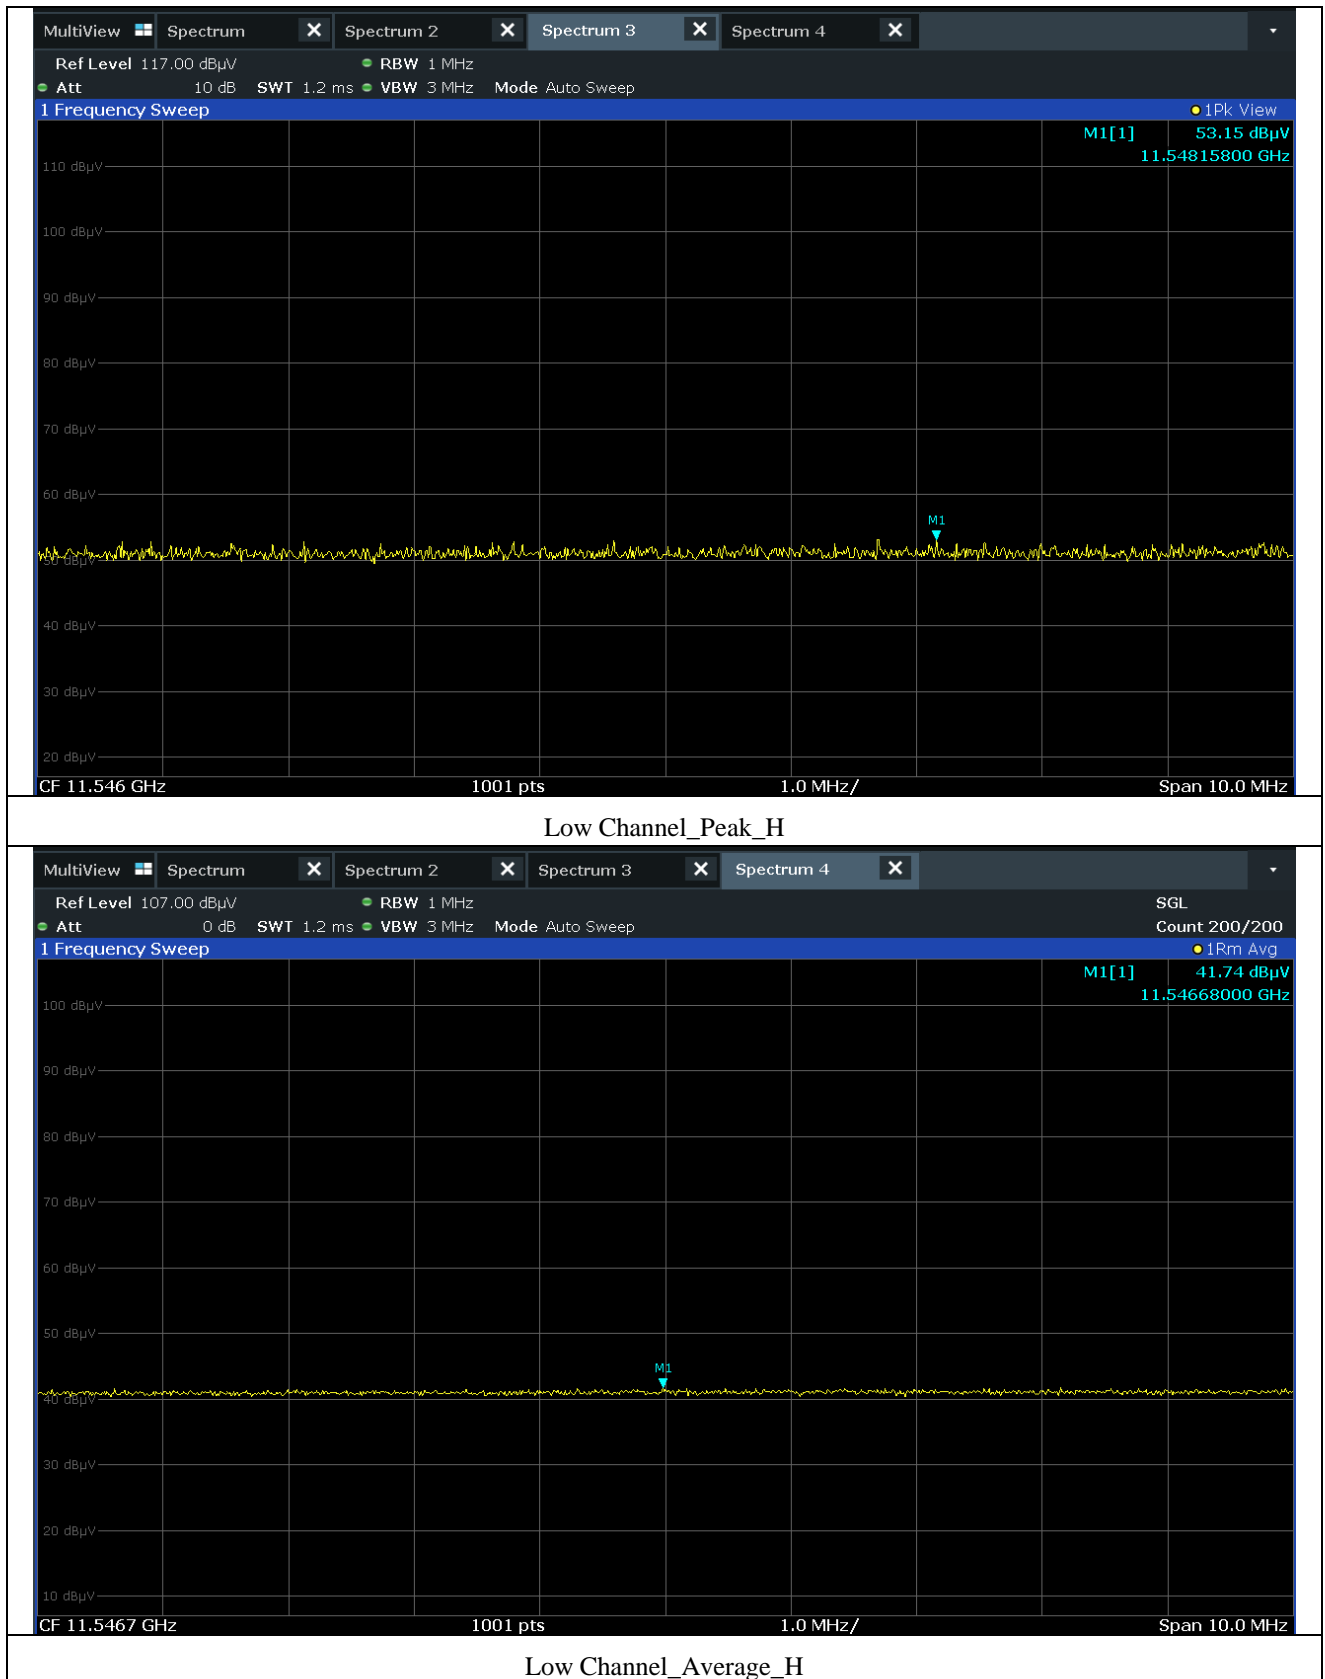


This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)



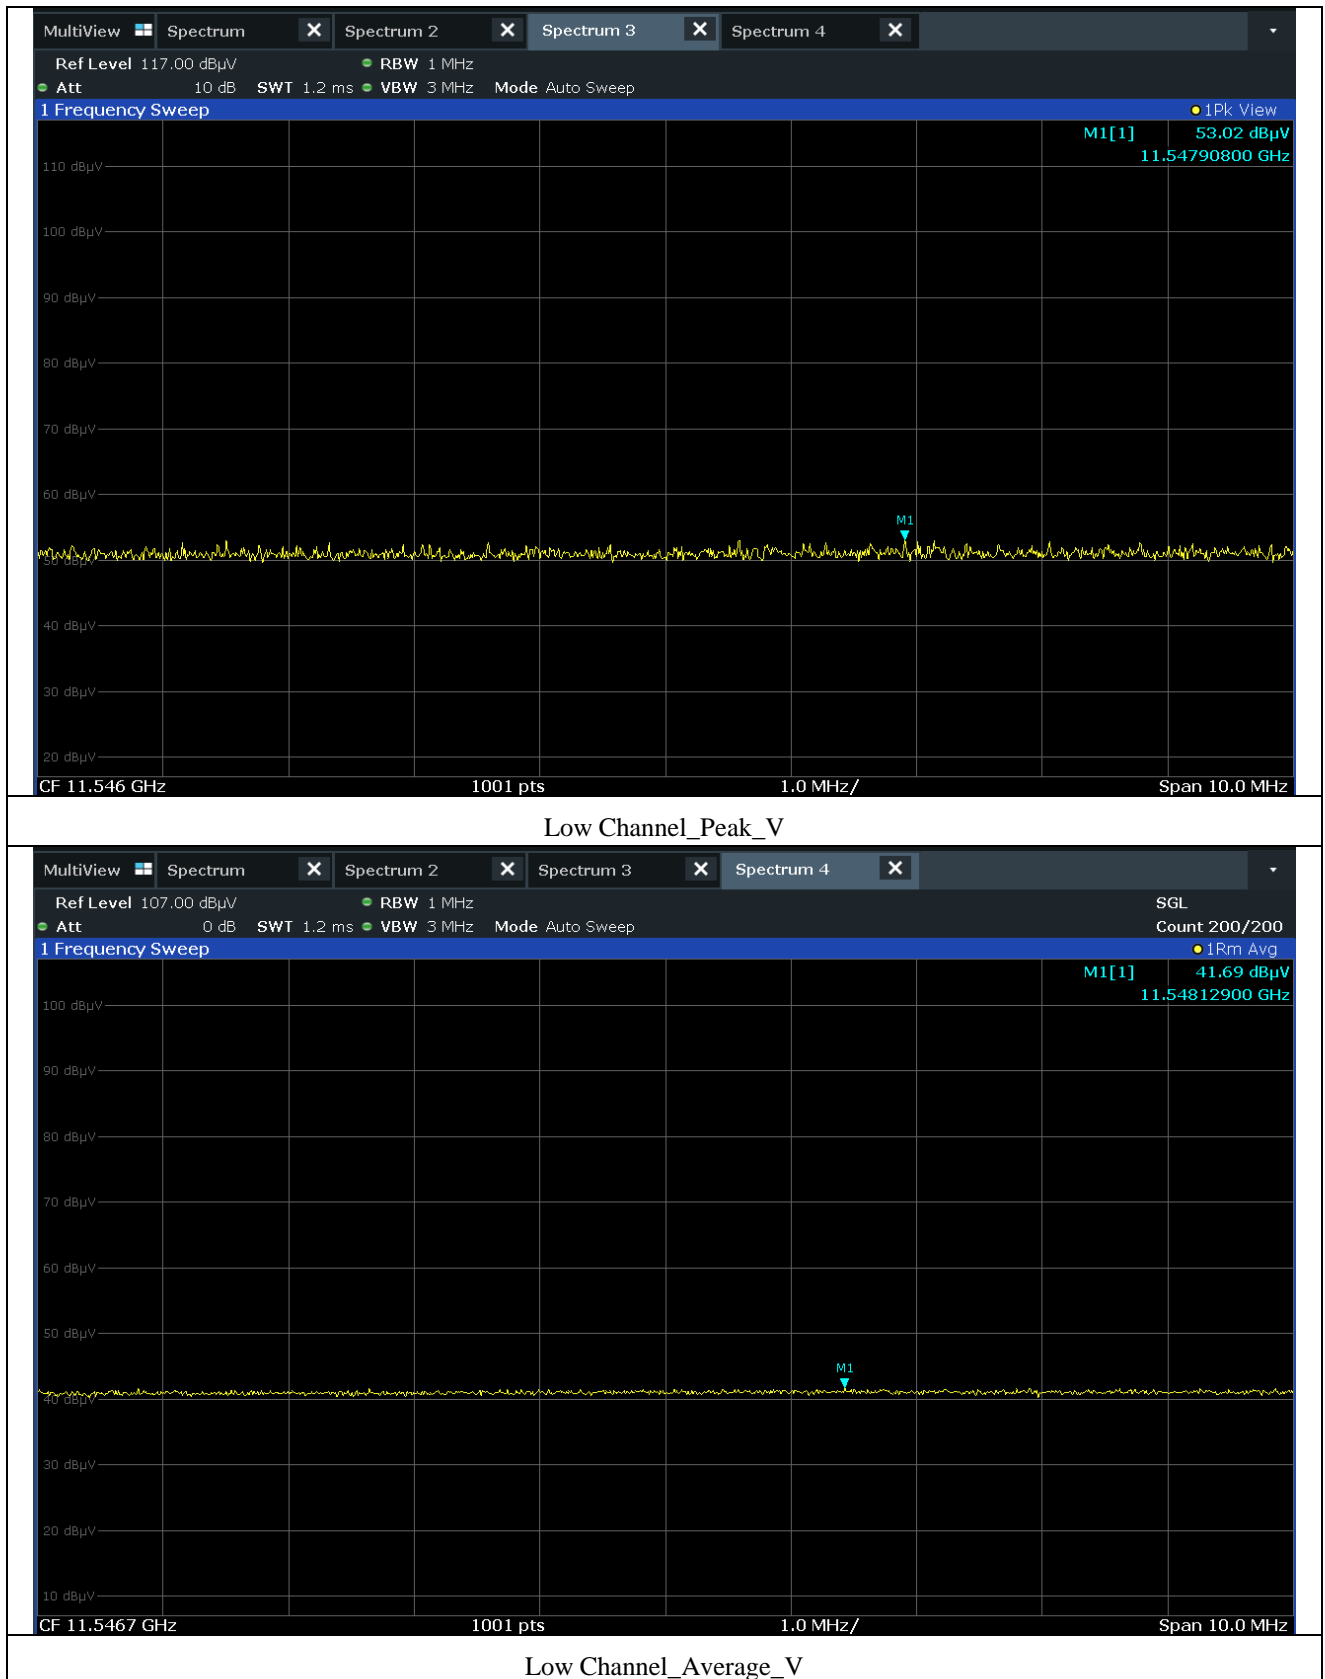


This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

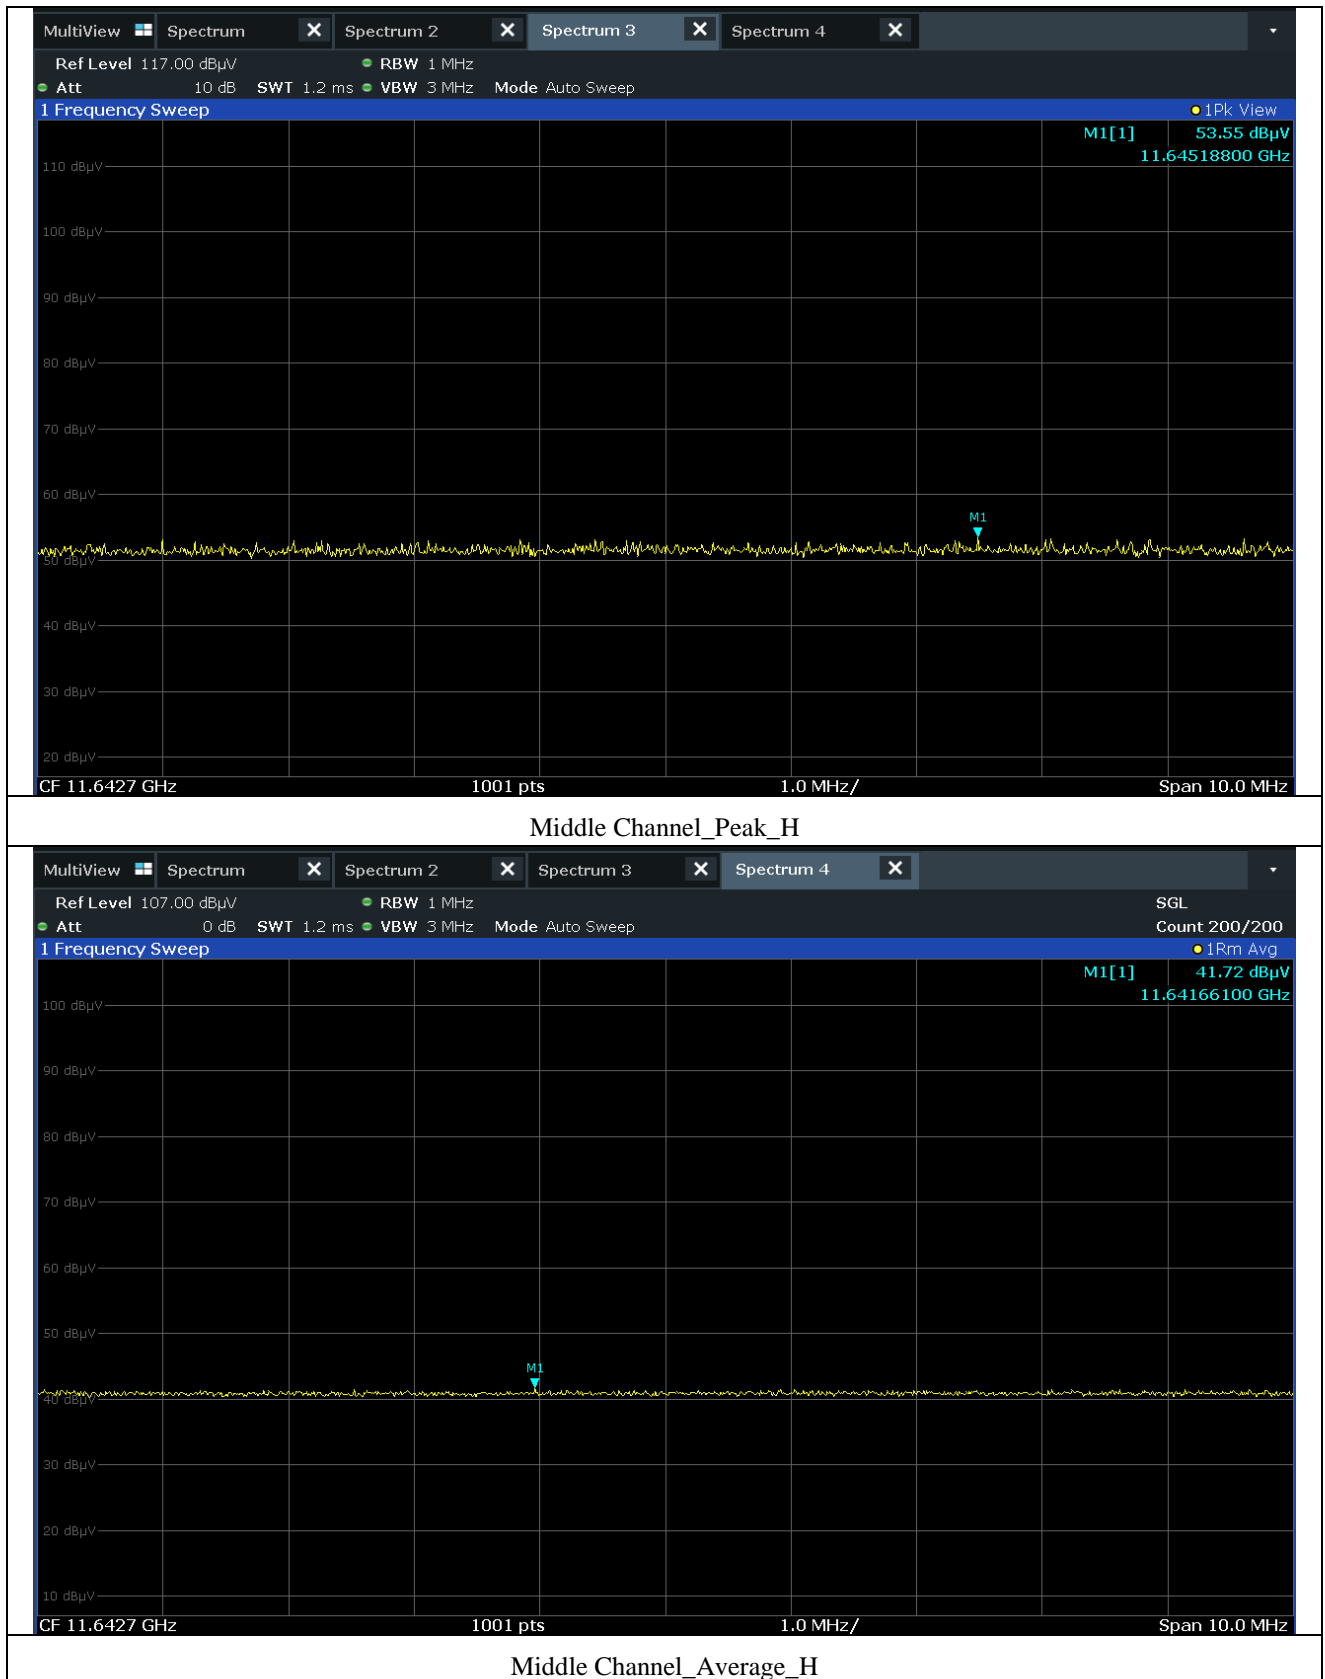


This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

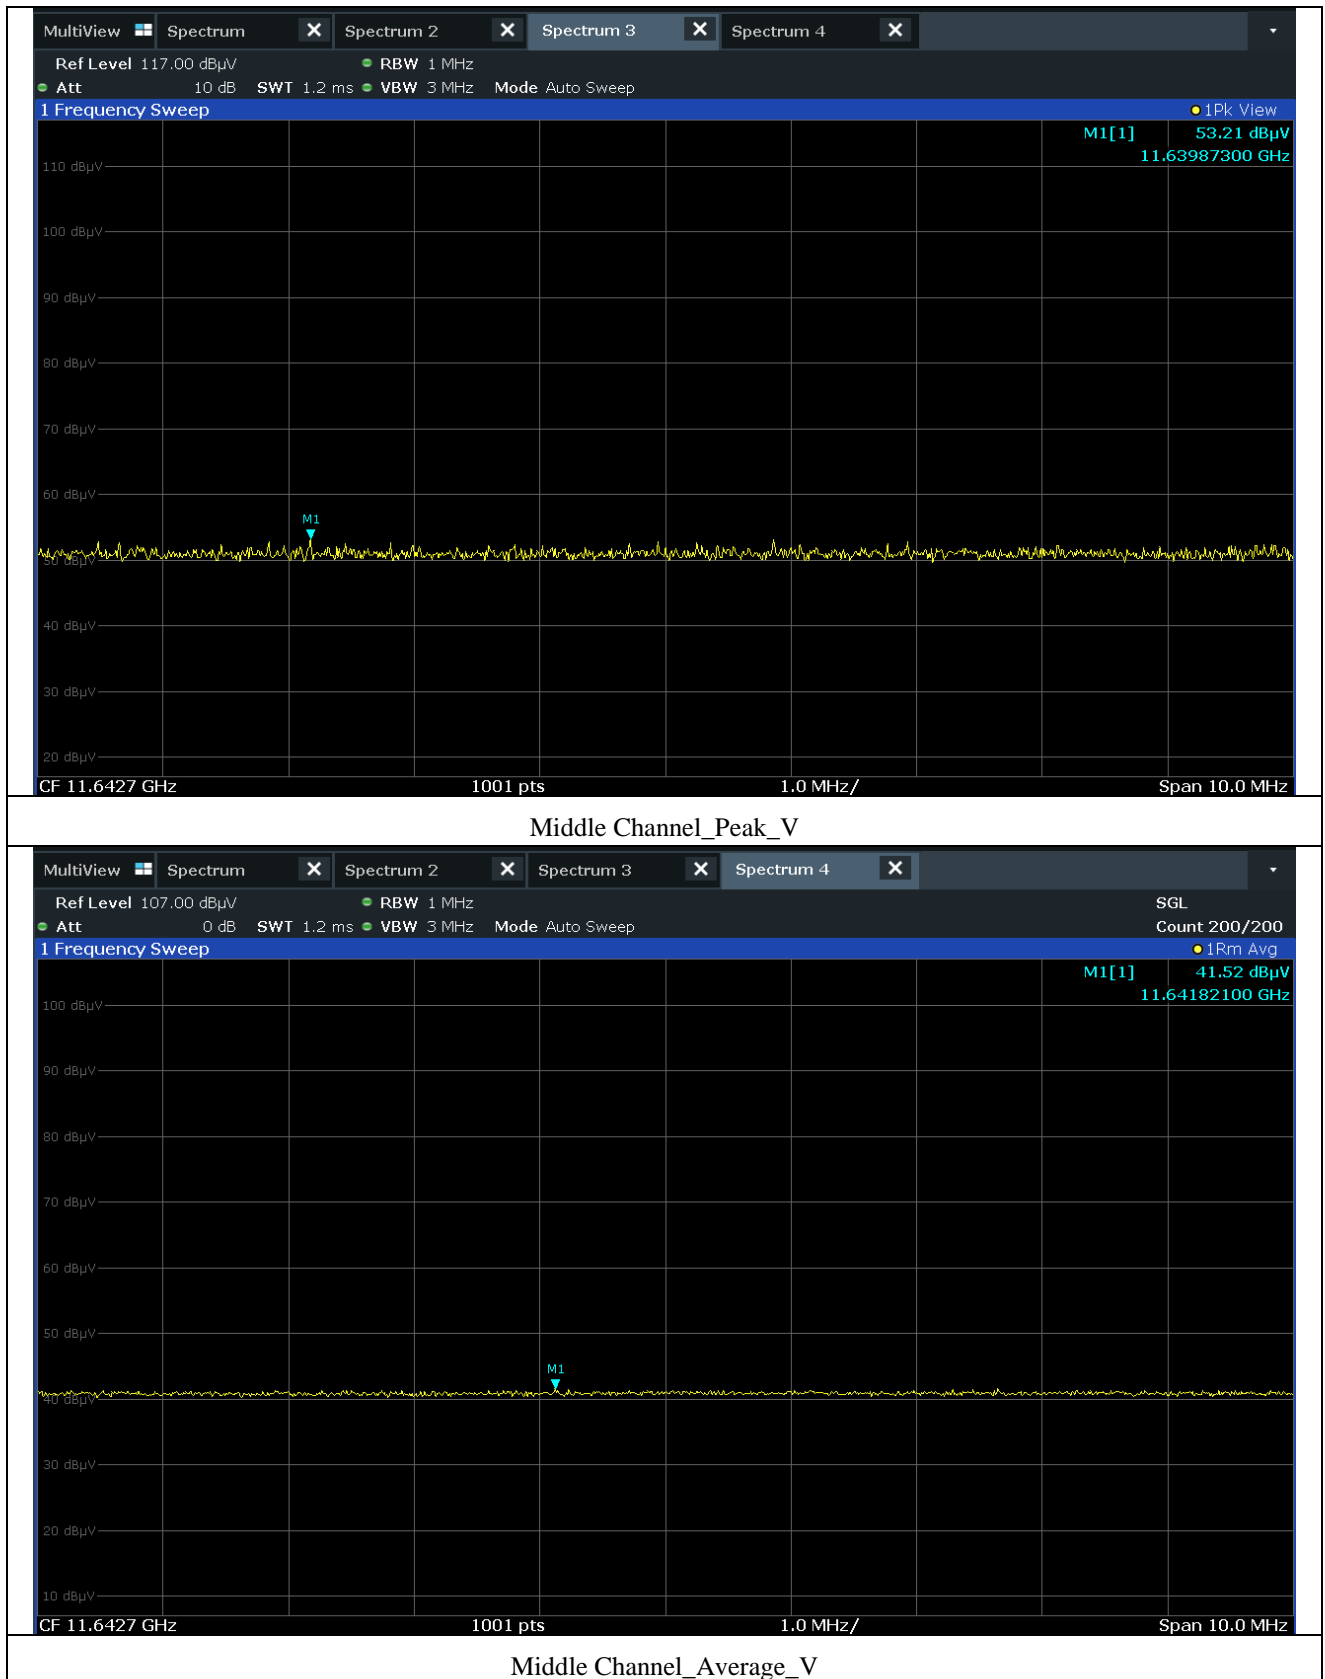


This Report is not correlated with the authentication of KOLAS


It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

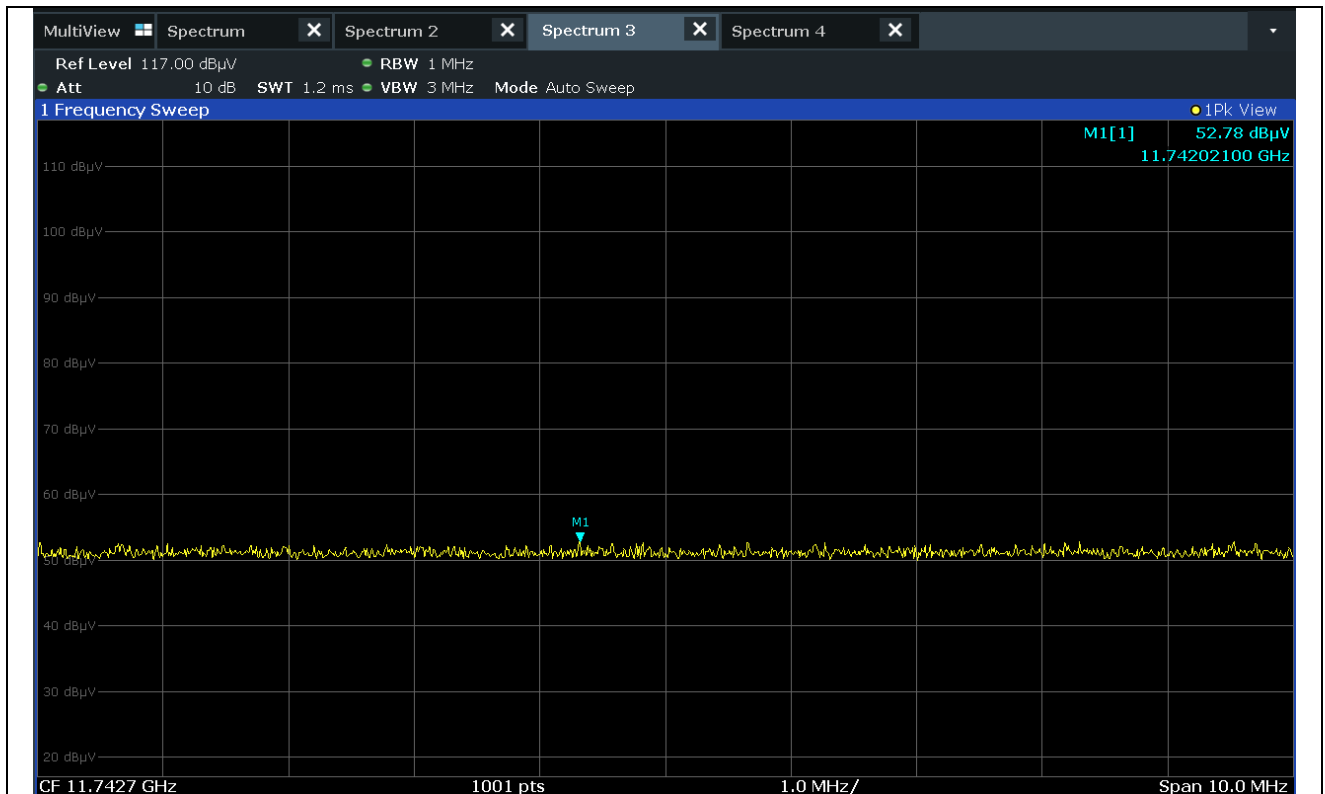

High Channel\_Peak\_H

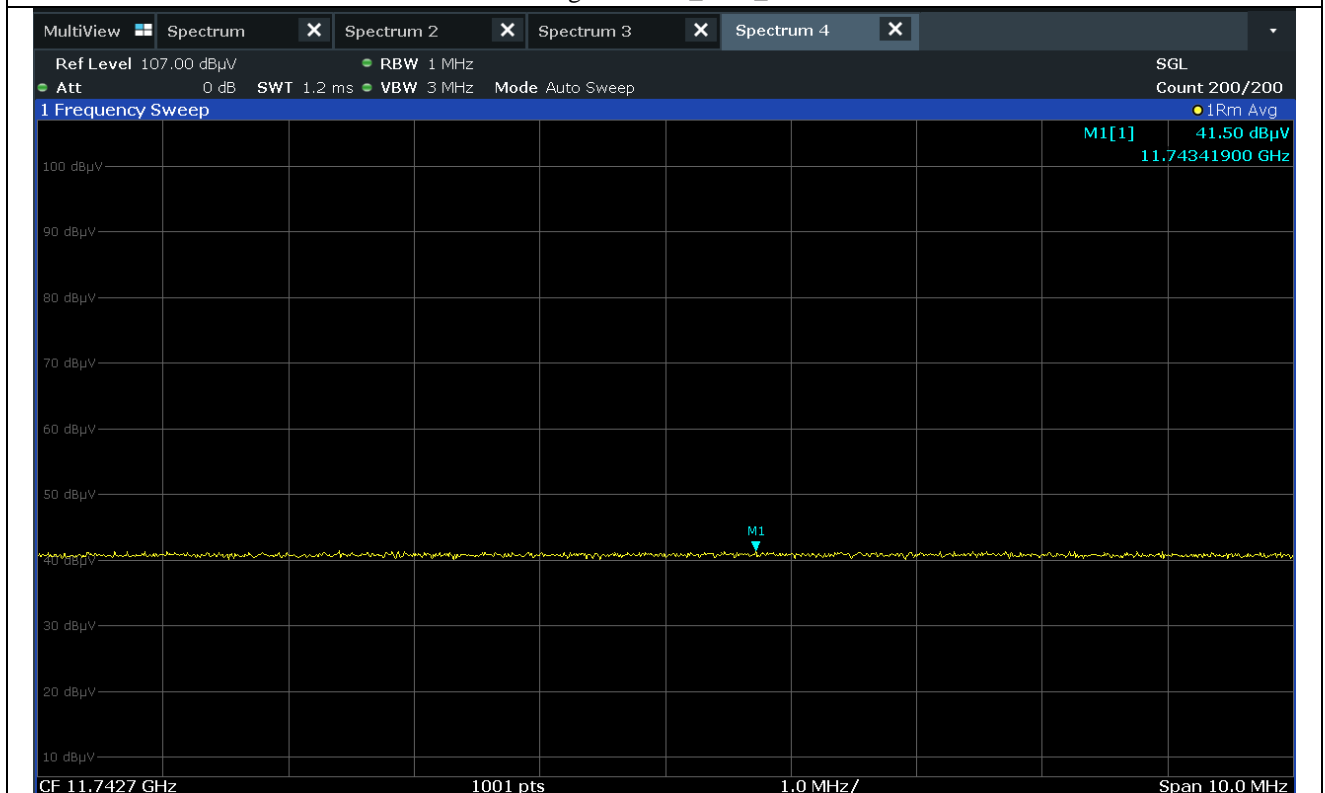


High Channel\_Average\_H

This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

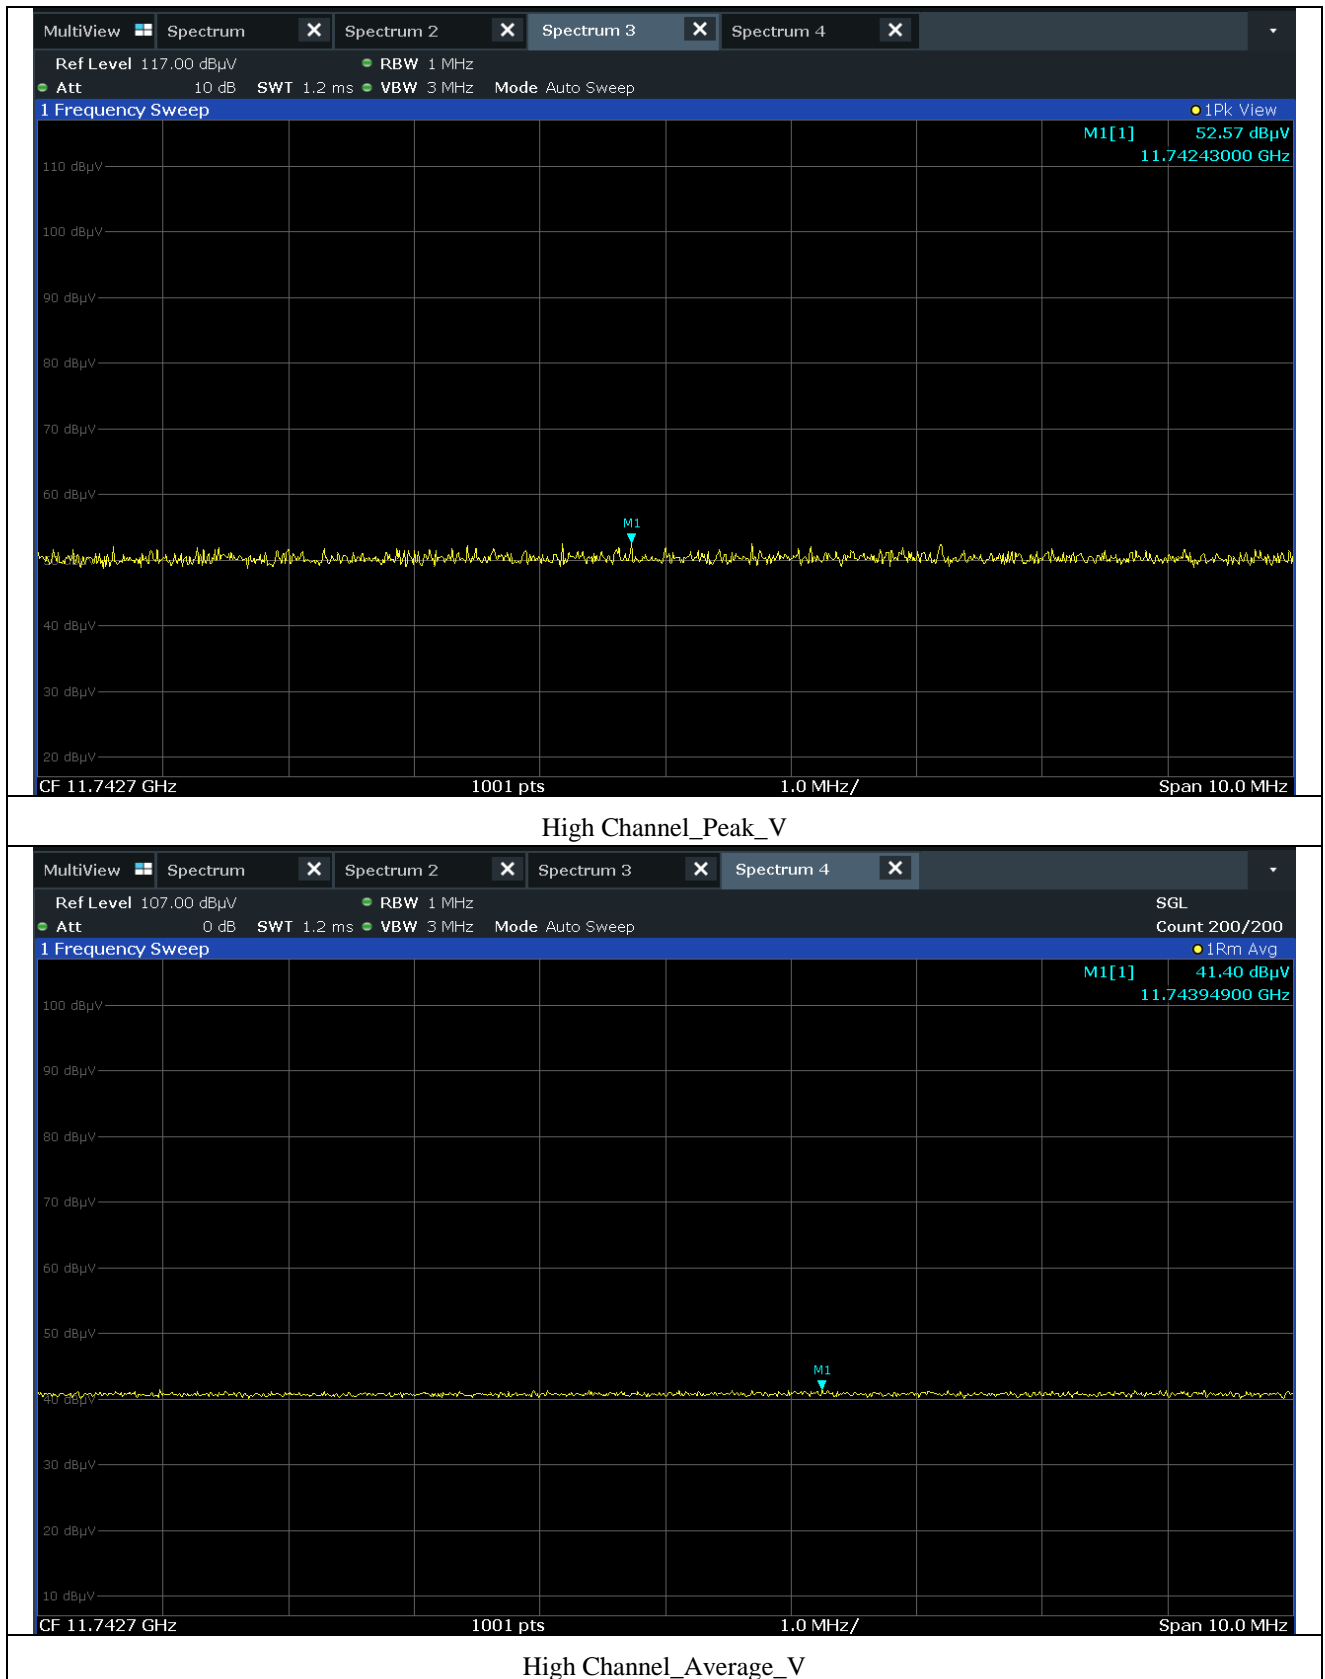

This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)


### 8.5.3 Test Data for Frequency range: 30 MHz ~ 1 000 MHz

Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.249 (d)

Result : PASSED

EUT : Audio Transceiver

Detector : CISPR Quasi-Peak (6 dB Bandwidth: 120 kHz)

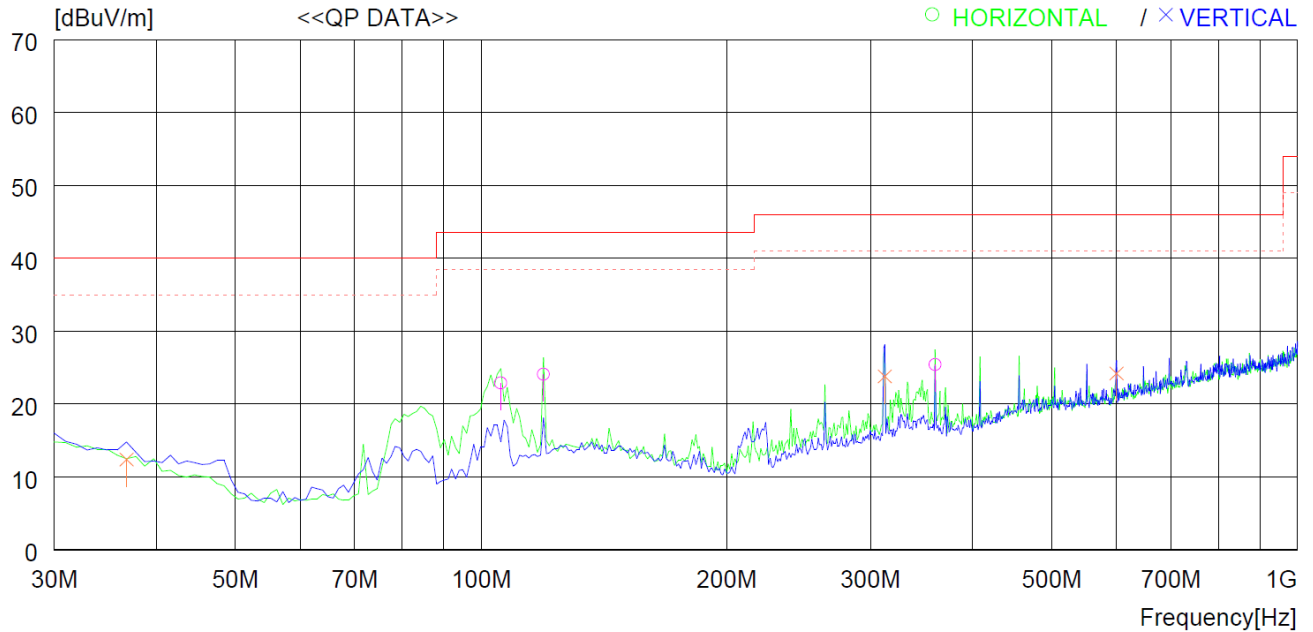

No.	FREQ	READING	ANT	LOSS	GAIN	RESULT	LIMIT	MARGIN	ANTENNA	TABLE
	[MHz]	[dBuV]	FACTOR	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	[cm]	[DEG]
----- Horizontal -----										
1	105.660	37.1	16.3	2.0	32.5	22.9	43.5	20.6	300	0
2	119.240	36.1	18.4	2.1	32.5	24.1	43.5	19.4	300	0
3	359.800	34.3	20.0	3.6	32.5	25.4	46.0	20.6	100	47
----- Vertical -----										
4	36.790	25.4	18.5	1.1	32.6	12.4	40.0	27.6	100	359
5	312.270	33.3	19.4	3.5	32.4	23.8	46.0	22.2	200	143
6	600.358	27.5	24.3	4.9	32.5	24.2	46.0	21.8	100	340

This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

#### 8.5.4 Test Data for Below 30 MHz

Resolution bandwidth : 200 Hz (from 9 kHz to 0.15 MHz), 9 kHz (from 0.15 MHz to 30 MHz)

Frequency range : 9 kHz ~ 30 MHz

Measurement distance : 3 m

Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.249 (d)

Result : PASSED

Frequency (MHz)	Reading (dBμV)	Ant. Pol. (H/V)	Ant. Height (m)	Angle (°)	Ant. Factor (dB/m)	Cable Loss	Emission Level(dBμV/m)	Limits (dBμV/m)	Margin (dB)
It was not observed any emissions from the EUT.									

#### 8.5.5 Test Data above 1 GHz except for harmonic

-. Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode  
1 MHz and RMS Detector for Average Mode

-. Video bandwidth : 3 MHz for Peak and Average Mode

-. Frequency range : 1 GHz ~ 40 GHz

-. Measurement distance : 3 m

-. Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.249 (d)

- Result : PASSED

Frequency (MHz)	Reading (dBμV)	Ant. Pol. (H/V)	Ant. Height (m)	Angle (°)	Ant. Factor (dB/m)	Cable Loss	Emission Level(dBμV/m)	Limits (dBμV/m)	Margin (dB)
It was not observed any emissions from the EUT.									

### 8.5.6 Band Edge

- Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode  
1 MHz and RMS Detector for Average Mode
- Video bandwidth : 3 MHz for Peak and Average Mode
- Measurement distance : 3 m
- Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.249 (d)
- Result : PASSED

Radiated Emissions			Ant	Correction Factors			Total	FCC Limit	
Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss (dB)	Amp Gain	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel									
5 725.00	53.45	Peak	H	34.30	8.60	45.19	51.16	74.00	22.84
	43.54	Average	H	34.30	8.60	45.19	41.25	54.00	12.75
	53.64	Peak	V	34.30	8.60	45.19	51.35	74.00	22.65
	42.87	Average	V	34.30	8.60	45.19	40.58	54.00	13.42
5 875.00	50.77	Peak	H	34.80	8.80	45.19	49.18	74.00	24.82
	41.38	Average	H	34.80	8.80	45.19	39.79	54.00	14.21
	50.80	Peak	V	34.80	8.80	45.19	49.21	74.00	24.79
	40.94	Average	V	34.80	8.80	45.19	39.35	54.00	14.65
Test Data for Middle Channel									
5 725.00	51.42	Peak	H	34.30	8.60	45.19	49.13	74.00	24.87
	41.28	Average	H	34.30	8.60	45.19	38.99	54.00	15.01
	51.57	Peak	V	34.30	8.60	45.19	49.28	74.00	24.72
	41.94	Average	V	34.30	8.60	45.19	39.65	54.00	14.35
5 875.00	53.46	Peak	H	34.80	8.80	45.19	51.87	74.00	22.13
	43.58	Average	H	34.80	8.80	45.19	41.99	54.00	12.01
	53.20	Peak	V	34.80	8.80	45.19	51.61	74.00	22.39
	43.67	Average	V	34.80	8.80	45.19	42.08	54.00	11.92

This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)


ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)



Test Data for High Channel									
5 725.00	50.42	Peak	H	34.30	8.60	45.19	48.13	74.00	25.87
	40.58	Average	H	34.30	8.60	45.19	38.29	54.00	15.71
	51.28	Peak	V	34.30	8.60	45.19	48.99	74.00	25.01
	40.90	Average	V	34.30	8.60	45.19	38.61	54.00	15.39
5 875.00	67.16	Peak	H	34.80	8.80	45.19	65.57	74.00	8.43
	53.53	Average	H	34.80	8.80	45.19	51.94	54.00	2.06
	66.78	Peak	V	34.80	8.80	45.19	65.19	74.00	8.81
	53.37	Average	V	34.80	8.80	45.19	51.78	54.00	2.22

Remark. Margin (dB) = Limit (dBuV/m) – Total (dBuV/m)

Total = Reading + Antenna Factor + Cable Loss – Amp Gain

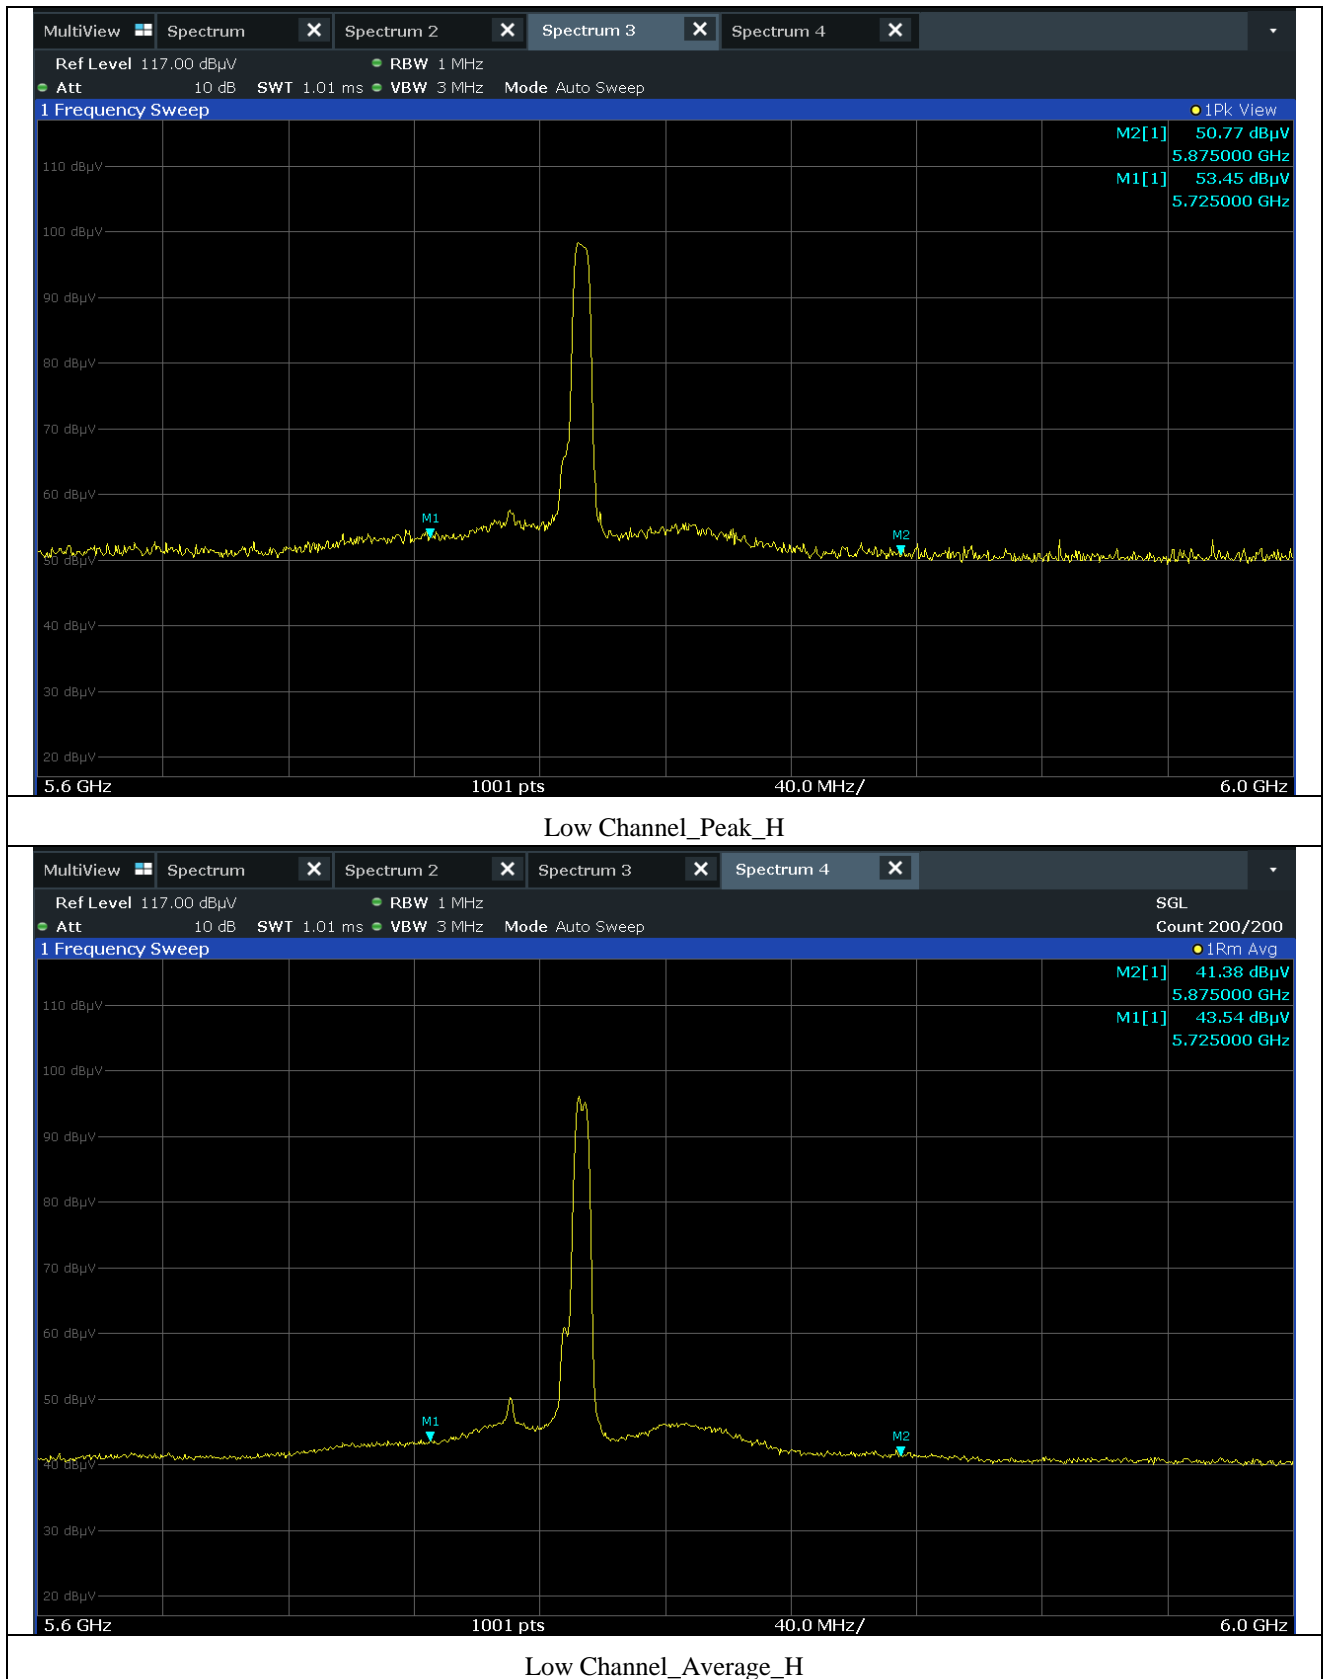


This Report is not correlated with the authentication of KOLAS


It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

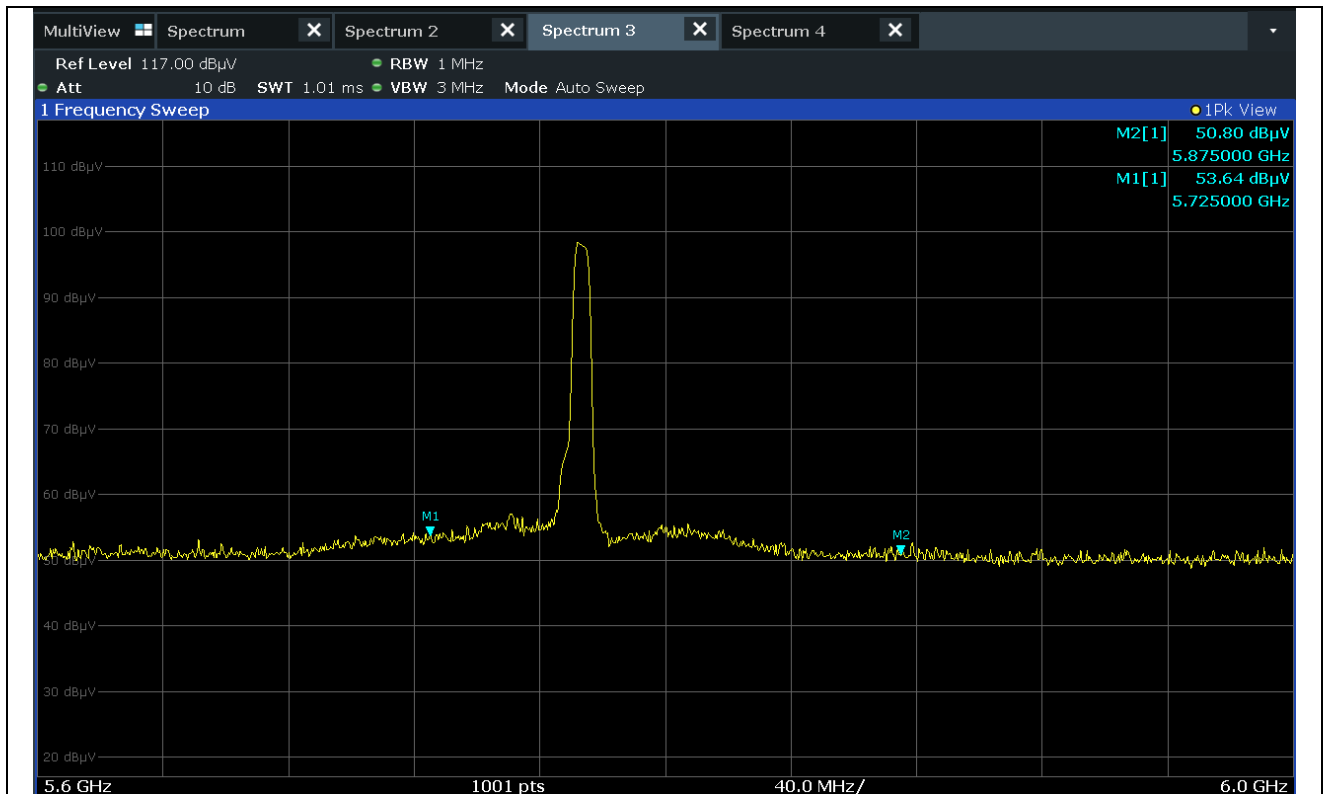

Low Channel\_Peak\_V

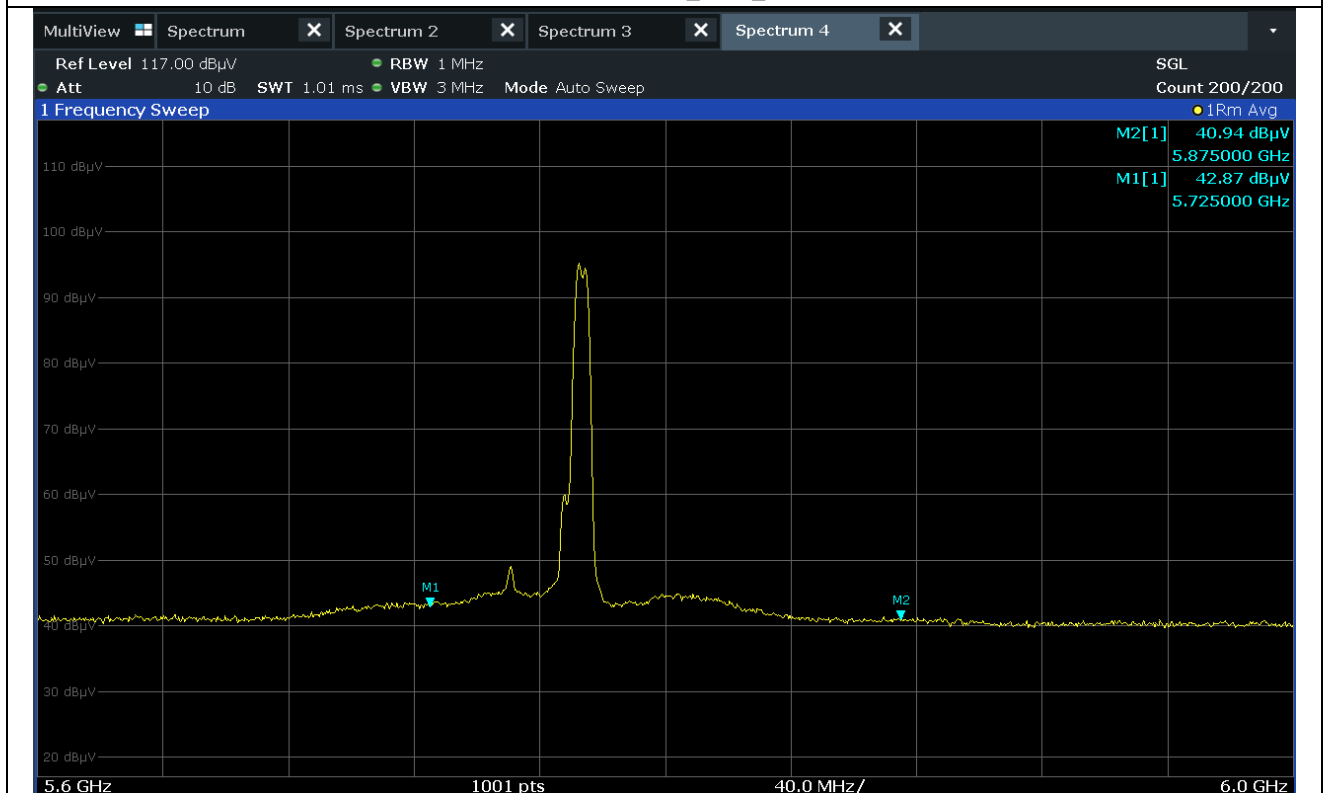


Low Channel\_Average\_V

This Report is not correlated with the authentication of KOLAS


It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

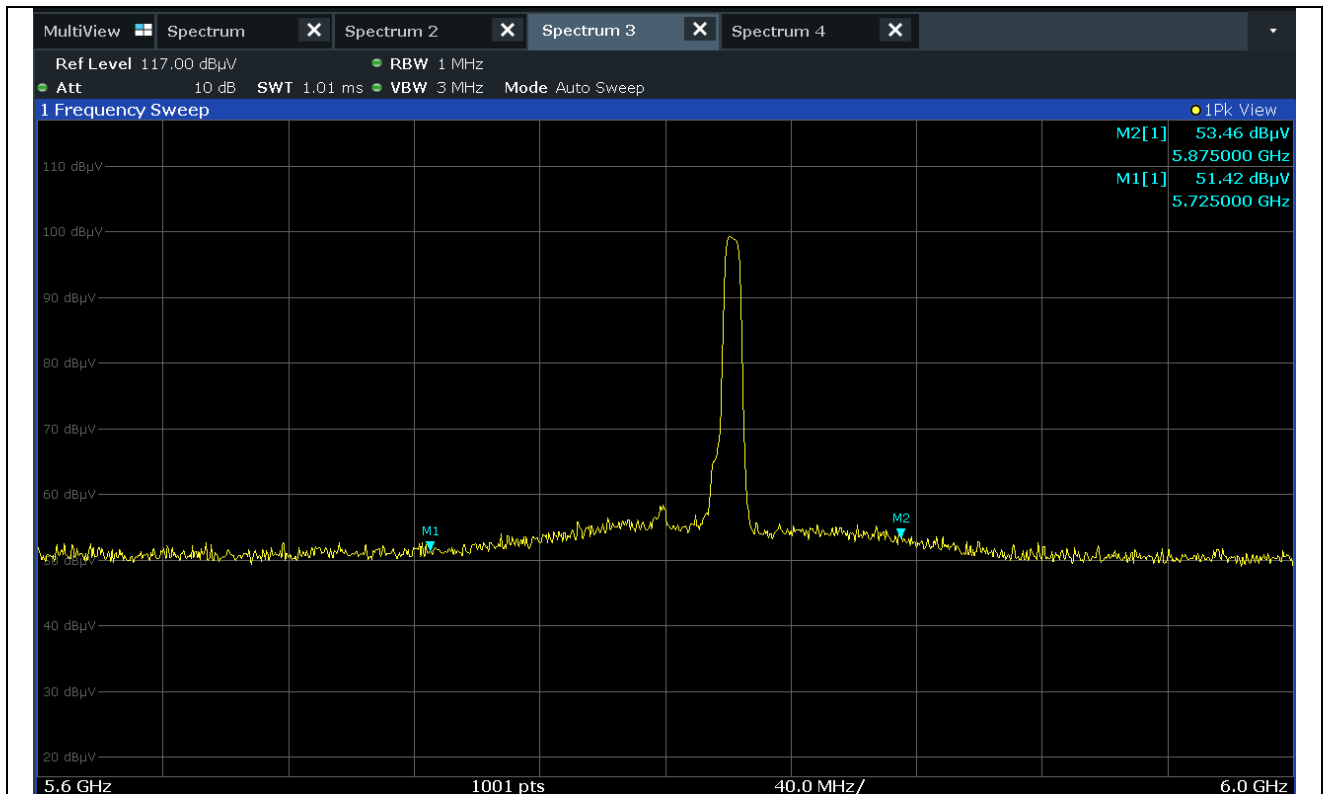

Middle Channel\_Peak\_H

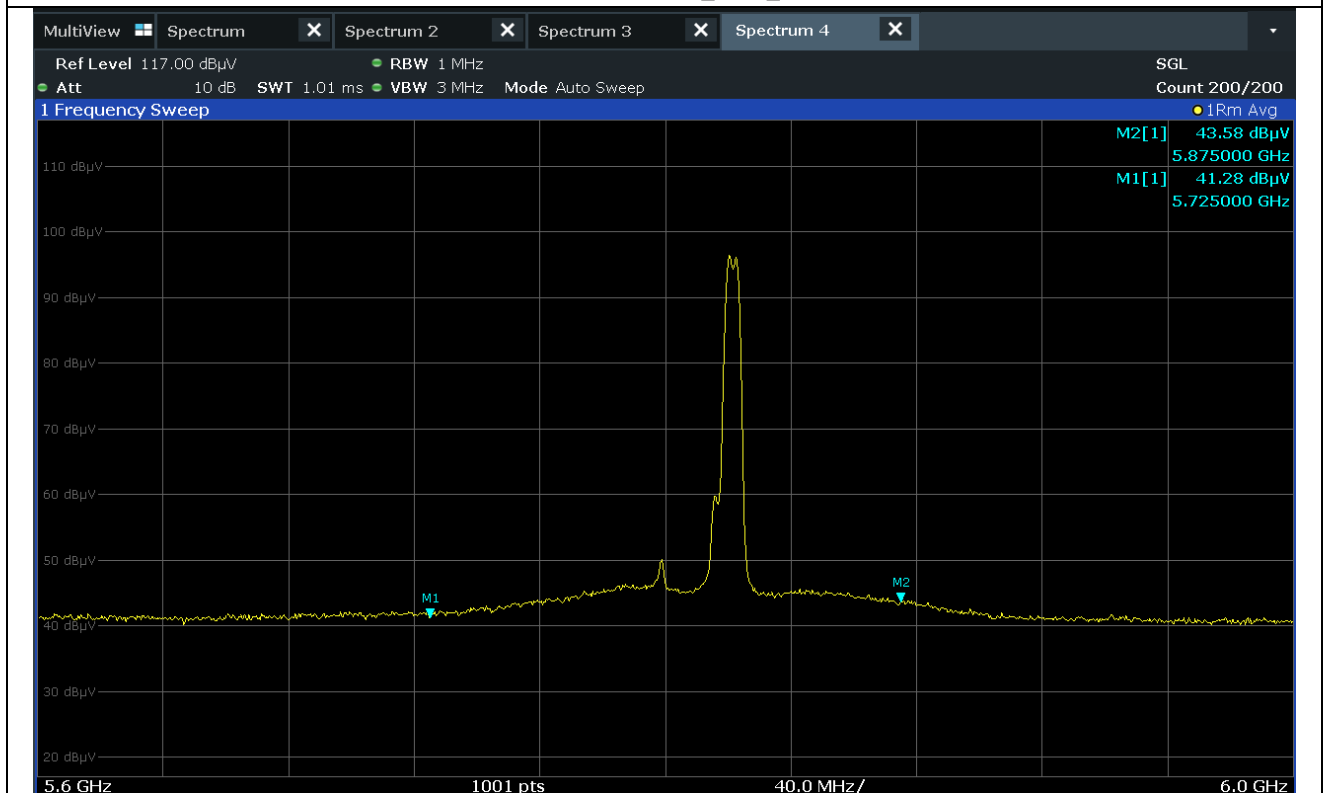


Middle Channel\_Average\_H

This Report is not correlated with the authentication of KOLAS


It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

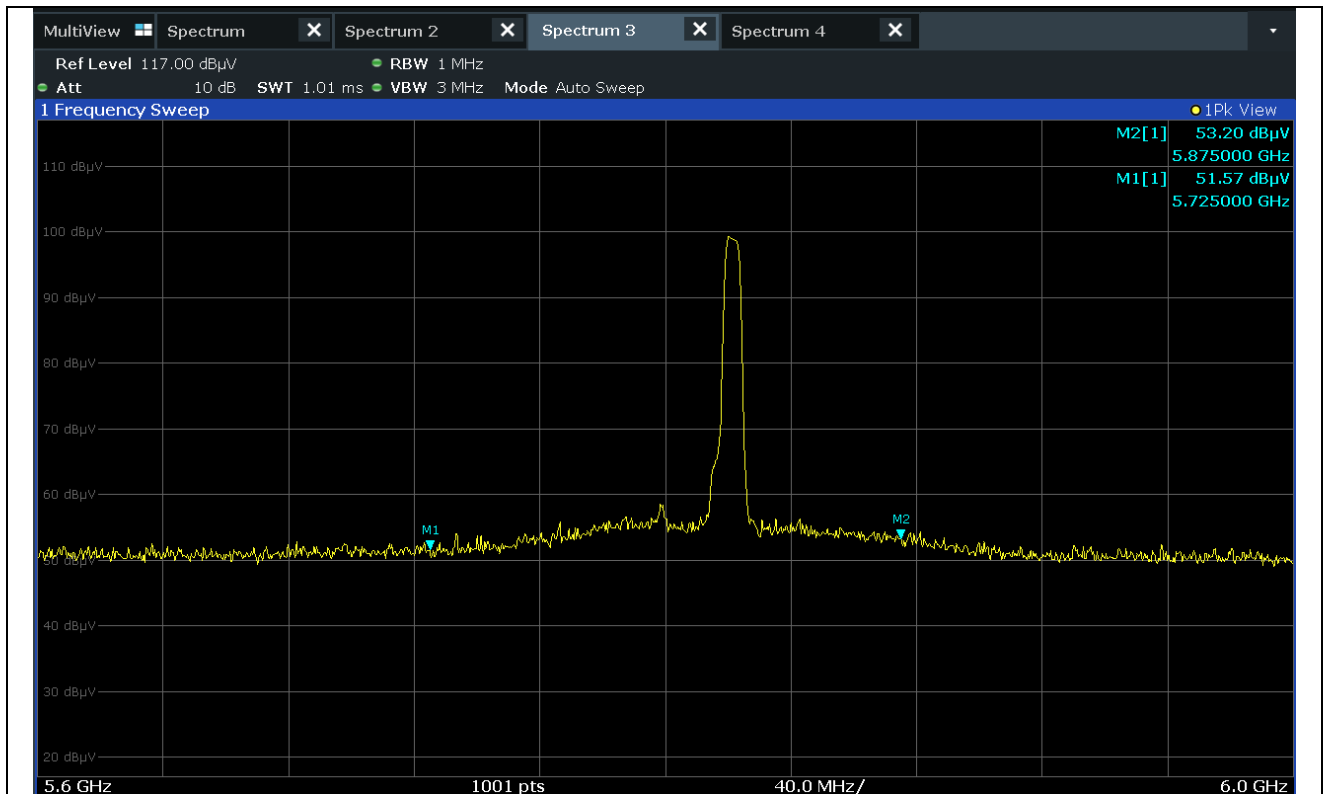

Middle Channel\_Peak\_V

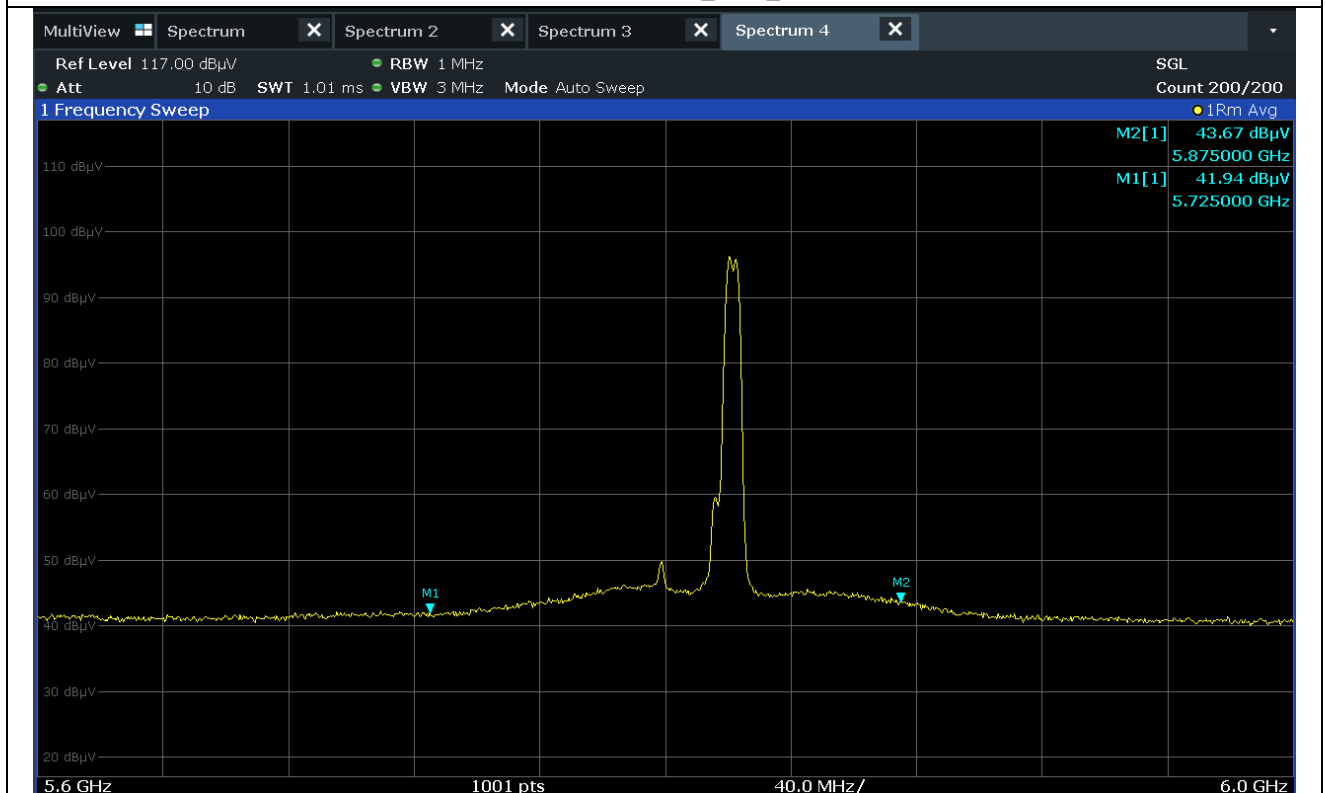


Middle Channel\_Average\_V

This Report is not correlated with the authentication of KOLAS


It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

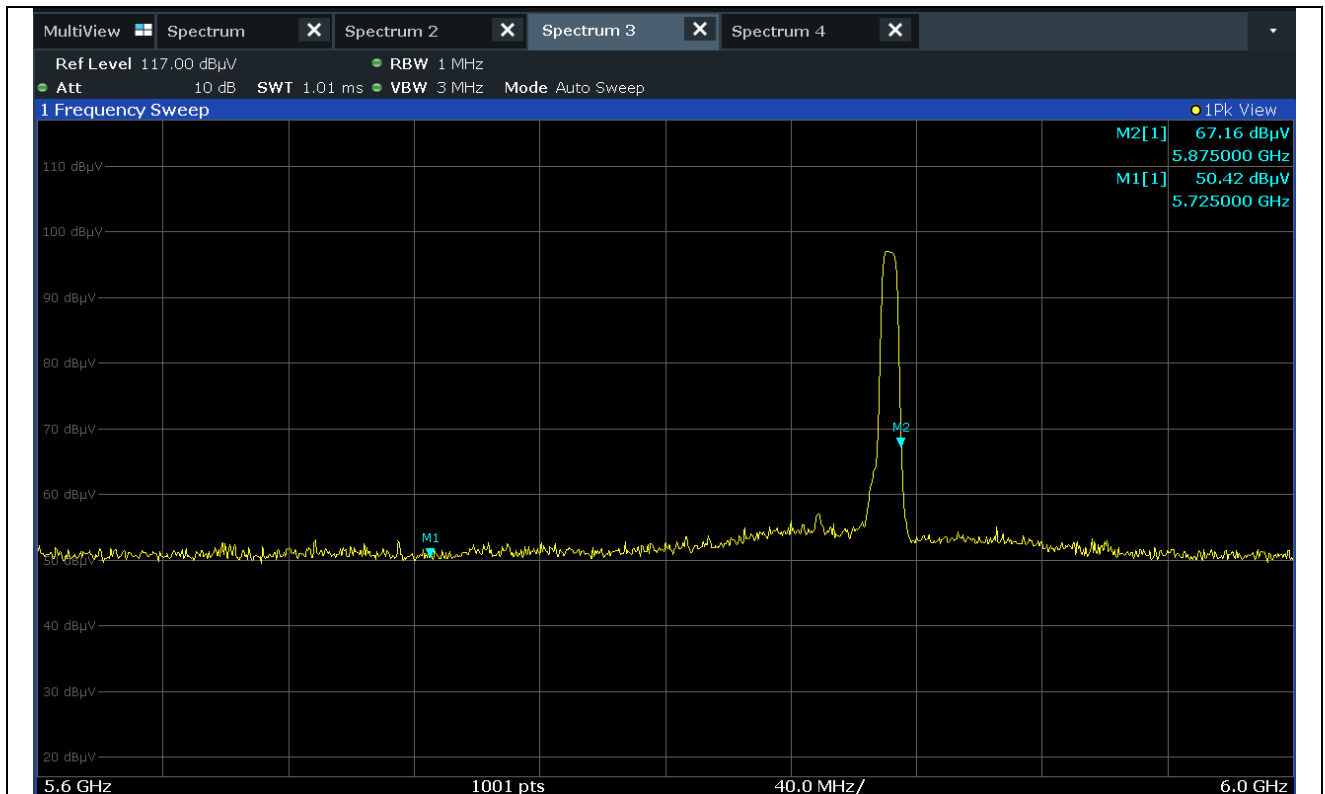

High Channel\_Peak\_H

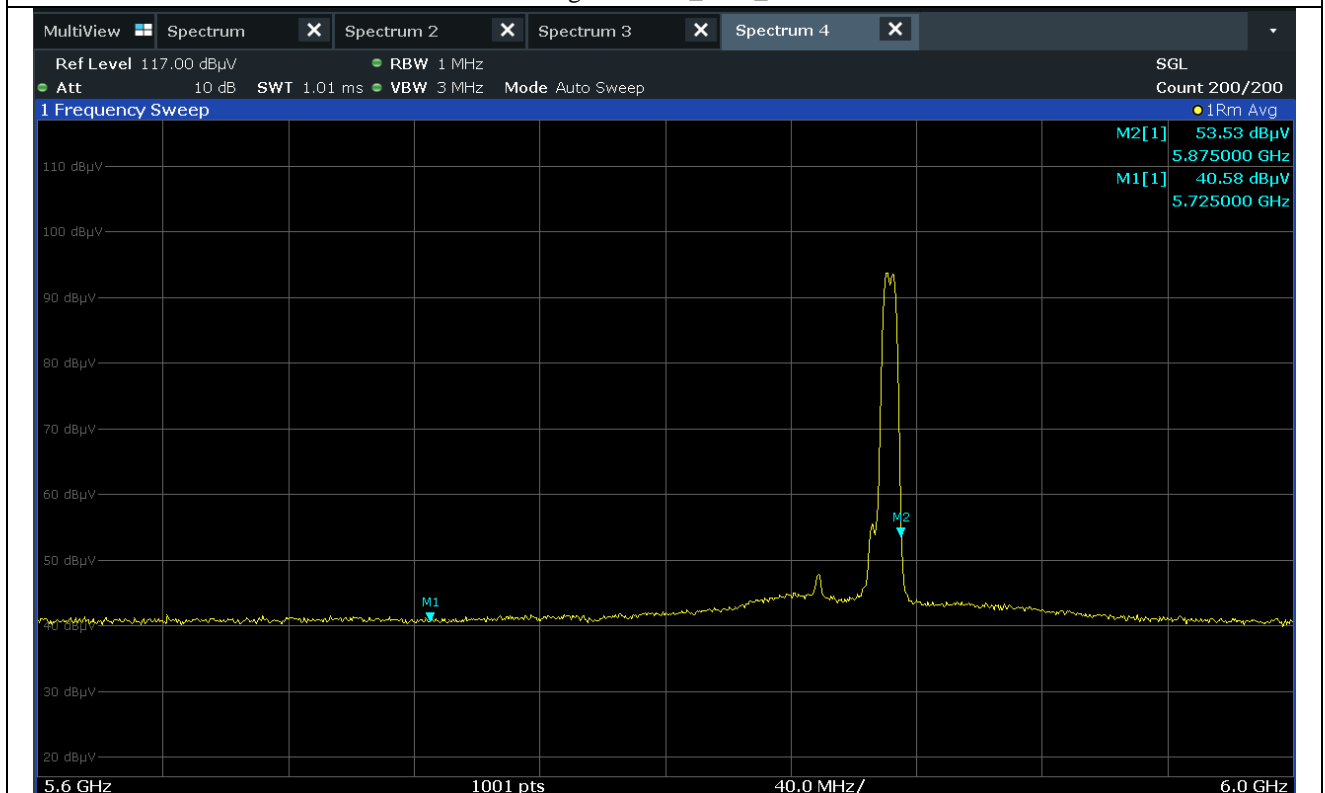


High Channel\_Average\_H

This Report is not correlated with the authentication of KOLAS


It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

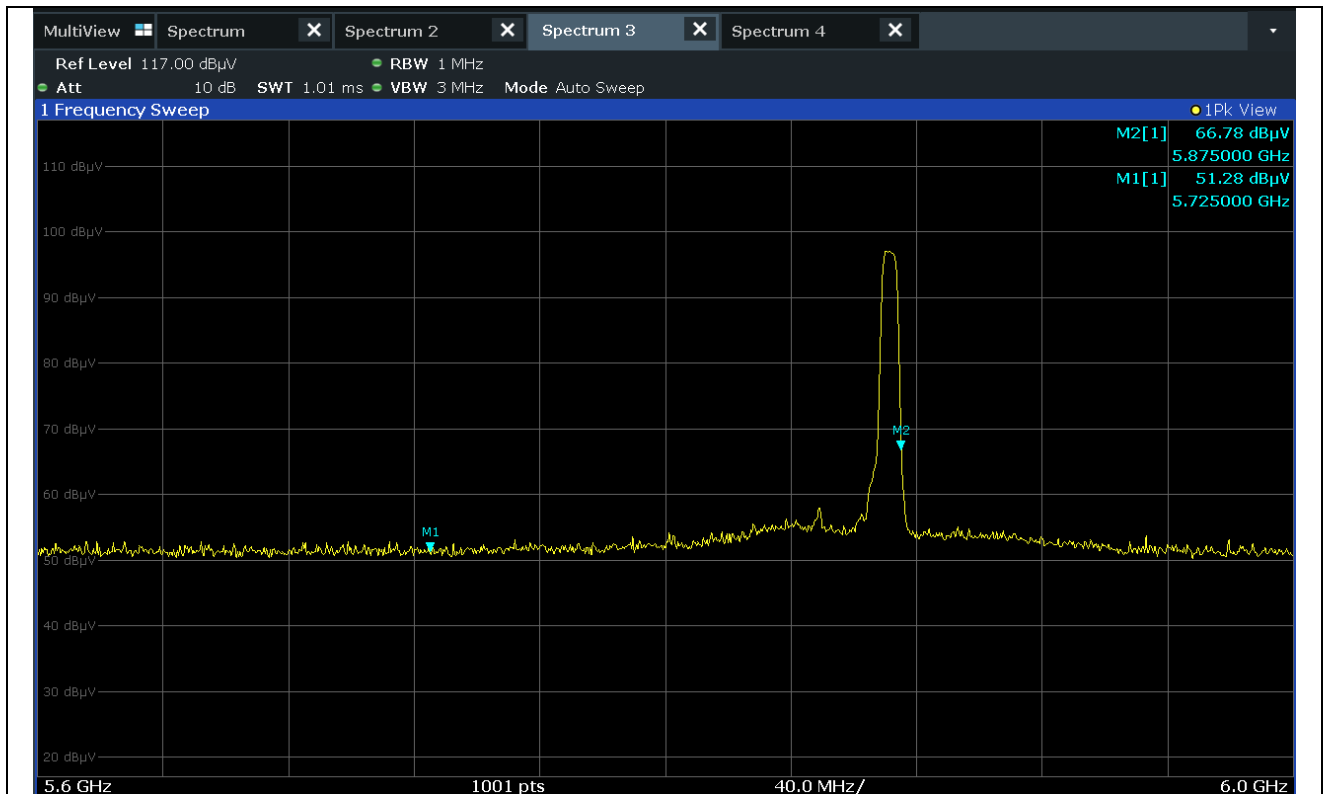

High Channel\_Peak\_V

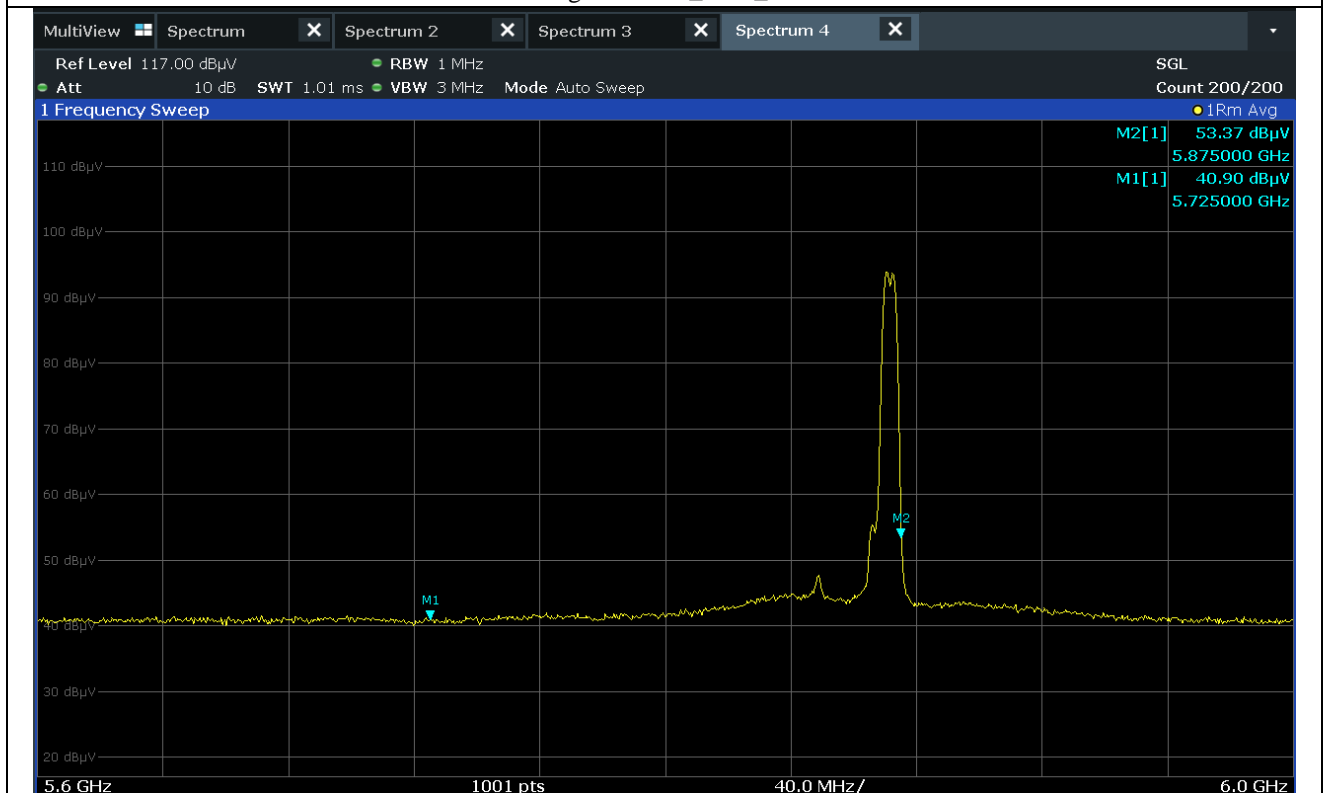

High Channel\_Average\_V

This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

## 9. CONDUCTED EMISSION TEST

### 9.1 Operating environment

Temperature : 23 °C  
Relative humidity : 48 % R.H.

### 9.2 Test set-up

The EUT was placed on a wooden table, 0.8 m height above the floor. Power was fed to the EUT through a 50  $\Omega$  / 50  $\mu$ H + 5  $\Omega$  Artificial Mains Network (AMN). The ground plane was electrically bonded to the reference ground system and all power lines were filtered from ambient.


### 9.3 Test Date

December 20, 2021 ~ December 24, 2021



## 9.4 Test data

- . Resolution bandwidth : 9 kHz
- . Frequency range : 0.15 MHz ~ 30 MHz
- . Tested Line : HOT LINE

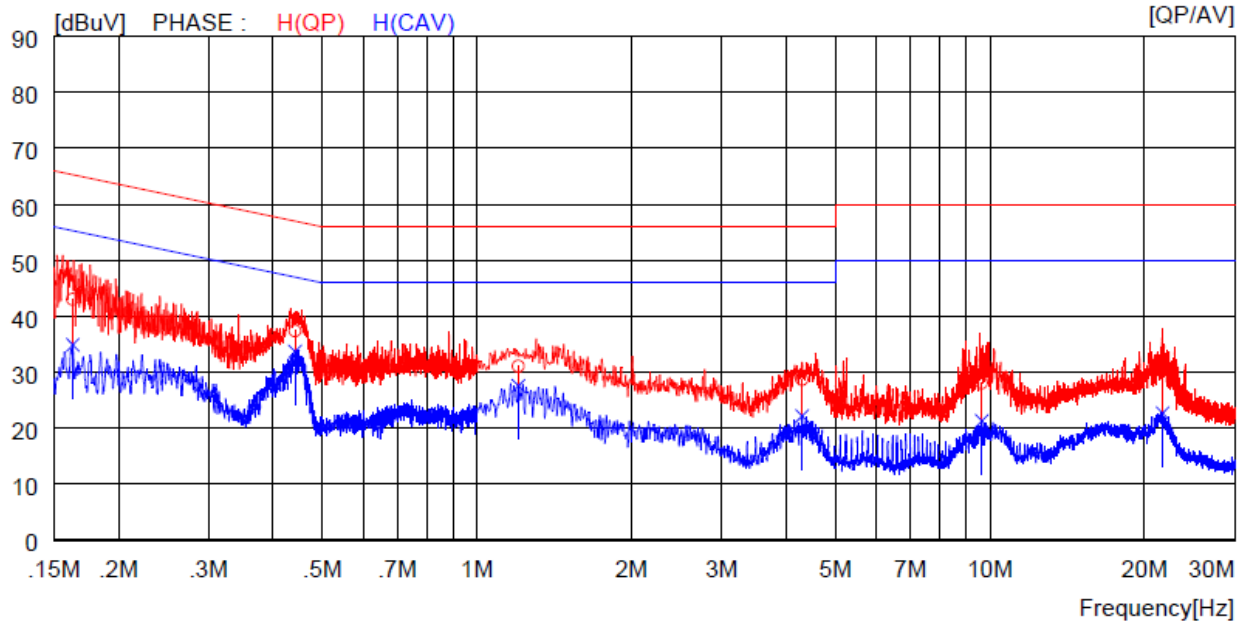


NO	FREQ [MHz]	READING		C.FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	
1	0.16300	33.1	----	9.9	43.0	----	65.3	----	22.3	----	H (QP)
2	0.44200	27.5	----	9.9	37.4	----	57.0	----	19.6	----	H (QP)
3	1.20400	21.0	----	10.1	31.1	----	56.0	----	24.9	----	H (QP)
4	4.30400	18.6	----	10.1	28.7	----	56.0	----	27.3	----	H (QP)
5	9.64000	17.9	----	10.2	28.1	----	60.0	----	31.9	----	H (QP)
6	21.71000	20.9	----	10.4	31.3	----	60.0	----	28.7	----	H (QP)
7	0.16300	----	25.0	9.9	----	34.9	----	55.3	----	20.4	H (CAV)
8	0.44200	----	23.8	9.9	----	33.7	----	47.0	----	13.3	H (CAV)
9	1.20400	----	17.5	10.1	----	27.6	----	46.0	----	18.4	H (CAV)
10	4.30400	----	12.1	10.1	----	22.2	----	46.0	----	23.8	H (CAV)
11	9.64000	----	11.1	10.2	----	21.3	----	50.0	----	28.7	H (CAV)
12	21.71000	----	12.3	10.4	----	22.7	----	50.0	----	27.3	H (CAV)

This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

-. Tested Line : NEUTRAL LINE

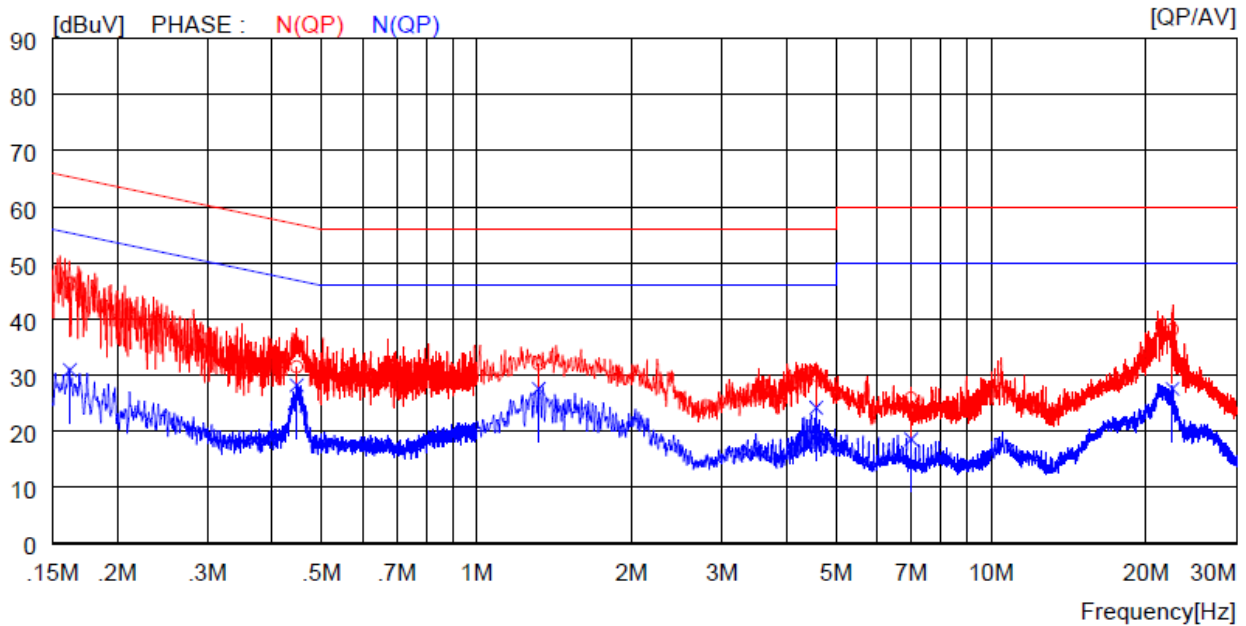

NO	FREQ [MHz]	READING		C.FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	
1	0.16200	36.4	----	9.9	46.3	----	65.4	----	19.1	----	N (QP)
2	0.44700	21.6	----	9.9	31.5	----	56.9	----	25.4	----	N (QP)
3	1.32000	21.9	----	10.1	32.0	----	56.0	----	24.0	----	N (QP)
4	4.57200	19.9	----	10.1	30.0	----	56.0	----	26.0	----	N (QP)
5	6.99000	15.8	----	10.1	25.9	----	60.0	----	34.1	----	N (QP)
6	22.53000	27.7	----	10.4	38.1	----	60.0	----	21.9	----	N (QP)
7	0.16200	----	21.0	9.9	----	30.9	----	55.4	----	24.5	N (CAV)
8	0.44700	----	18.3	9.9	----	28.2	----	46.9	----	18.7	N (CAV)
9	1.32000	----	17.5	10.1	----	27.6	----	46.0	----	18.4	N (CAV)
10	4.57200	----	14.1	10.1	----	24.2	----	46.0	----	21.8	N (CAV)
11	6.99000	----	8.5	10.1	----	18.6	----	50.0	----	31.4	N (CAV)
12	22.53000	----	17.2	10.4	----	27.6	----	50.0	----	22.4	N (CAV)

Remark: Margin (dB) = Limit – Level (Result)

The emission level in above table is included the transducer factor that means insertion loss (LISN), cable loss and attenuator.

## 10. LIST OF TEST EQUIPMENT

Model Number	Manufacturer	Description	Serial Number	Last Cal.(Interval)
FSW43	Rohde & Schwarz	Signal & Spectrum Analyzer	104544	Jul. 14, 2021 (1Y)
ESW44	Rohde & Schwarz	EMI Test Receiver	101851	Mar. 23, 2021 (1Y)
310N	Sonoma Instrument	Pre-Amplifier	392756	Oct. 14, 2021 (1Y)
SCU18	Rohde & Schwarz	Pre-Amplifier	102266	Jul. 14, 2021 (1Y)
PAM-840A	Com-Power	Pre-Amplifier	461339	Oct. 18, 2021 (1Y)
FMZB 1513	Schwarzbeck	Loop Antenna	1513-235	Mar. 24, 2020 (2Y)
HLP-2008	TDK	Hybrid Antenna	131316	Feb. 27, 2020 (2Y)
AH-118	Com-Power	Horn Antenna	10050061	Oct. 15, 2021 (1Y)
BBHA9170	Schwarzbeck	Horn Antenna	BBHA9170179	Jan. 12, 2021 (1Y)
ESR3	Rohde & Schwarz	EMI Test Receiver	102602	Mar. 15, 2021 (1Y)
NSLK8126	Schwarzbeck	AMN	8126-404	Mar. 15, 2021 (1Y)
ESH3Z2	Rohde & Schwarz	PULSE LIMITER	357.8810.52	Mar. 15, 2021 (1Y)
DT2000-2t	Innco System	Turn Table	N/A	N/A
MA-4640-XPET	Innco System	Antenna Master	MA4640/652/43100318/P	N/A
CO3000	Innco System	Controller	1026/40960617/P	N/A