

TEST REPORT

of

FCC Part 15 Subpart B&C §15.247 / RSS-210 Issue 8, RSS-Gen Issue 3

FCC ID/IC ID Certification : A3LXE313C13 / 649E-XE313C13

Equipment Under Test : SAMSUNG Notebook
Model Name : XE313C13
Serial No. : N/A
Applicant : SAMSUNG ELECTRONICS CO., LTD.
Manufacturer : SAMSUNG ELECTRONICS CO., LTD.
Date of Test(s) : 2013.08.23 ~ 2013.10.22
Date of Issue : 2013.11.05

In the configuration tested, the EUT complied with the standards specified above.

Tested By:



Wonjun Sim

Date

2013.11.05

Approved By:



Feel Jeong

Date

2013.11.05

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

INDEX

Table of contents

1. General information -----	3
2. Transmitter radiated spurious emissions and conducted spurious emission -----	7
3. 6 dB bandwidth and 99% bandwidth -----	87
4. Maximum peak output power -----	115
5. Power Spectral Density -----	124
6. Transmitter AC Power Line Conducted Emission-----	147
7. Antenna Requirement -----	152

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

1. General Information

1.1. Testing Laboratory

SGS Korea Co., Ltd. (Gunpo Laboratory).

- Wireless Div. 3FL, 18-34, Sanbon-dong, Gunpo-si, Gyeonggi-do, Korea 435-040 (Lab)
- Wireless Div. 1FL, 18-34, Sanbon-dong, Gunpo-si, Gyeonggi-do, Korea 435-040 (Chamber)

All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.

Phone No. : +82 31 428 5700

Fax No. : +82 31 427 2371

1.2. Details of Applicant

Applicant : SAMSUNG ELECTRONICS CO., LTD.
Address : 129, Samsung-Ro, Yeongtong-Gu, Suwon-Si, Gyeonggi-Do, Korea
Contact Person : Lee, Sang-Cheong
Phone No. : +82 31 277 4784
Fax No. : +82 31 277 9247

1.3. Description of EUT

Kind of Product	SAMSUNG Notebook	
Model Name	XE313C13	
Serial Number	N/A	
Power Supply	DC 7.5 V	
Frequency Range	2 402 MHz ~ 2 480 MHz (BT, BT LE), 2 412 MHz ~ 2 462 MHz (11b/g/n_HT20), 2 422 MHz ~ 2 452 MHz (11n_HT40), 5 745 MHz ~ 5 825 MHz (11a/n_HT20), 5 755 MHz ~ 5 795 MHz (11n_HT40), 5 180 MHz ~ 5 240 MHz (11a/n_HT20 – Non DFS), 5 190 MHz ~ 5 230 MHz (11n_HT40 – Non DFS), 5 260 MHz ~ 5 320 MHz (11a/n_HT20 – DFS), 5 270 MHz ~ 5 310 MHz (11n_HT40 – DFS), 5 500 MHz ~ 5 700 MHz (11a/n_HT20 – DFS), 5 510 MHz ~ 5 670 MHz (11n_HT40 – DFS)	
Modulation Technique	DSSS, OFDM, GFSK, $\pi/4$ DQPSK, 8DPSK	
Number of Channels	11 channel (11b/g/n_HT20), 7 channel (11n_HT40), 5 channel (11a/n_HT20), 2 channel (11n_HT40), 4 channel (11a/n_HT20–Non DFS), 2 channel (11n_HT40 – Non DFS), 15 channel (11a/n_HT20 – DFS), 7 channel (11n_HT40 – DFS), 79 channel (BT), 40 channel (BT LE)	
Antenna Type	Internal type (MIMO - 2 Tx / 2 Rx)	
Antenna Gain	ANT0 2 412 MHz ~ 2 462 MHz : -2.60 dB i, 5 180 MHz ~ 5 320 MHz : -1.88 dB i, 5 500 MHz ~ 5 700 MHz : -3.55 dB i, 5 745 MHz ~ 5 825 MHz : -3.99 dB i	ANT1 2 412 MHz ~ 2 462 MHz : -1.99 dB i, 5 180 MHz ~ 5 320 MHz : -3.08 dB i, 5 500 MHz ~ 5 700 MHz : -4.64 dB i, 5 745 MHz ~ 5 825 MHz : -4.87 dB i

1.4. Declaration by the manufacturer

- Duty Cycle $\geq$ 98 percent.
- 11a/b/g don't used the Aux Antenna(ANT1)

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

1.5. Test Equipment List

Equipment	Manufacturer	Model	S/N	Cal Date	Cal Interval	Cal Due.
Signal Generator	R&S	SMR40	100272	Aug. 23, 2013	Annual	Aug. 23, 2014
Signal Generator	R&S	8648D	3847M00534	Mar. 28, 2013	Annual	Mar. 28, 2014
Spectrum Analyzer	Agilent	N9030A	US51350132	Oct. 08, 2013	Annual	Oct. 08, 2014
Spectrum Analyzer	R&S	FSW43	100637	Jul. 26, 2013	Annual	Jul. 26, 2014
Attenuator	AEROFLEX / INMET	18N-20dB	3	Apr. 01, 2013	Annual	Apr. 01, 2014
Power Divider	KRYTAR	6005265	144967	May 29, 2013	Annual	May 29, 2014
High Pass Filter	Wainwright	WHK3.0/18G-6SS	344	Jun. 08, 2013	Annual	Jun. 08, 2014
High Pass Filter	Wainwright	WHK7.5/26.5G-6SS	11	Jun. 08, 2013	Annual	Jun. 08, 2014
Low Pass Filter	Mini circuits	NLP-1200+	V8979400903-2	Mar. 30, 2013	Annual	Mar. 30, 2014
Power Sensor	R&S	NRP-Z81	100669	Apr. 05, 2013	Annual	Apr. 05, 2014
DC Power Supply	Agilent	U8002A	MY50060028	Mar. 28, 2013	Annual	Mar. 28, 2014
Preamplifier	H.P.	8447F	2944A03909	Jun. 28, 2013	Annual	Jun. 28, 2014
Preamplifier	R&S	SCU 18	10117	Jan. 14, 2013	Annual	Jan. 14, 2014
Preamplifier	MITEQ Inc.	JS44-18004000-35-8P	1546891	Jun. 13, 2013	Annual	Jun. 13, 2014
Test Receiver	R&S	ESU26	100109	Feb. 28, 2013	Annual	Feb. 28, 2014
Bilog Antenna	SCHWARZBECK MESSELEKTRONIK	VULB9163	390	Apr. 19, 2012	Biennial	Apr. 19, 2014
Horn Antenna	R&S	HF906	100326	Nov. 23, 2011	Biennial	Nov. 23, 2013
Horn Antenna	SCHWARZBECK MESSELEKTRONIK	BBHA9170	BBHA9170431	Aug. 24, 2012	Biennial	Aug. 24, 2014
Antenna Master	INNCO	MM4000	N/A	N.C.R.	N/A	N.C.R.
Turn Table	INNCO	DS 1200S	N/A	N.C.R.	N/A	N.C.R.
Anechoic Chamber	SY Corporation	L × W × H (6.5 m × 3.5 m × 3.5 m)	N/A	N.C.R.	N/A	N.C.R.
EMI Test Receiver	R&S	ESHSI0	863365/018	Jun. 27, 2013	Annual	Jun. 27, 2014
Two-Line V-Network	R&S	ENV216	100190	Jan. 04, 2013	Annual	Jan. 04, 2014
Anechoic Chamber	SY Corporation	L × W × H (9.6 m × 6.4 m × 6.4 m)	N/A	N.C.R.	N/A	N.C.R.

► Support equipment

Description	Manufacturer	Model	Serial Number
N/A	-	-	-

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

1.6. Summary of Test Results

The EUT has been tested according to the following specifications:

APPLIED STANDARD:FCC Part15 subpart B&C, RSS-210, RSS-Gen			
Standard section		Test Item	Result
15.205(a) 15.209 15.247(d)	A8.5	Transmitter Radiated Spurious Emissions Conducted Spurious Emission	Complied
15.247(a)(2)	A8.2(a)	6 dB Bandwidth and 99% Bandwidth	Complied
15.247(b)(3)	A8.4(4)	Maximum Peak Output Power	Complied
15.247(e)	A8.3(2)	Power Spectral Density	Complied
15.207	RSS-Gen 7.2.4	Transmitter AC Power Line Conducted Emission	Complied

1.7. Test Procedure(s)

The measurement procedures described in the American National Standard for Methods of Measurement of Radio-Noise Emission from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz (ANSI C63.4-2003) and the guidance provided in KDB 558074_v03r01 were used in the measurement of the DUT.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

1.8. Sample calculation

Where relevant, the following sample calculation is provided:

1.8.1. Conducted test

Offset value (dB) = Attenuator (dB) + Cable loss (dB)

1.8.2. Radiation test

Field strength level (dB μ V/m) = Measured level (dB μ V) + Antenna factor (dB) + Cable loss (dB) - amplifier gain (dB)

1.9. Test report revision

Revision	Report number	Description
0	F690501/RF-RTL007061	Initial
1	F690501/RF-RTL007061-1	Updates KDB's Version, Revision information


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

2. Transmitter Radiated Spurious Emissions and Conducted Spurious Emission


2.1. Test Setup

2.1.1. Transmitter Radiated Spurious Emissions

The diagram below shows the test setup that is utilized to make the measurements for emission from 30 MHz to 1 GHz Emissions.

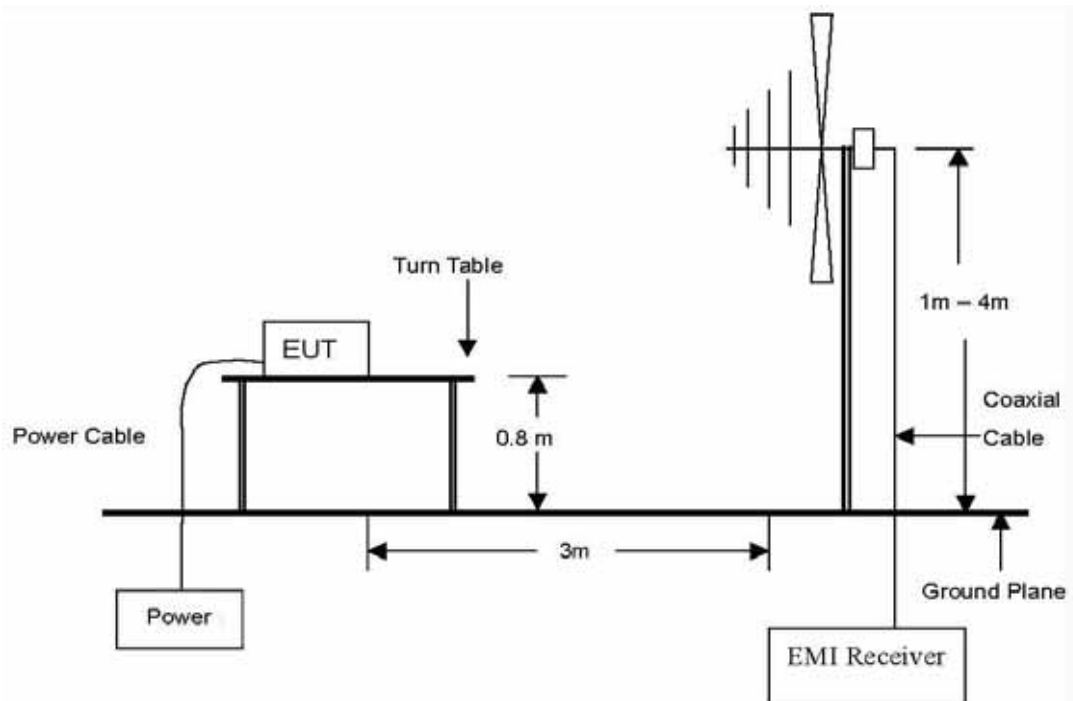


The diagram below shows the test setup that is utilized to make the measurements for emission. The spurious emissions were investigated from 1 GHz to the 10th harmonic of the highest fundamental frequency or 40 GHz, whichever is lower.

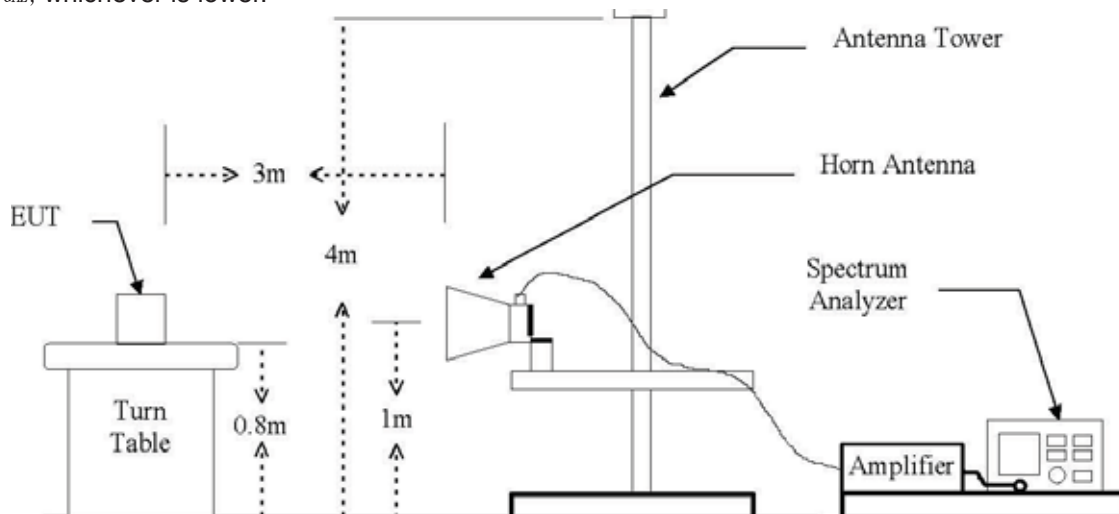

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

2.1.2. Conducted Spurious Emission



2.2. Limit

According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph(b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in section §15.209(a) is not required. In addition, radiated emission which in the restricted band, as define in section §15.205(a), must also comply the radiated emission limits specified in section §15.209(a) (see section §15.205(c))

According to § 15.209(a), Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table :

Frequency (MHz)	Distance (Meters)	Field Strength (dBμV/m)	Field Strength (μV/m)
30 - 88	3	40.0	100
88 – 216	3	43.5	150
216 – 960	3	46.0	200
Above 960	3	54.0	500

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

2.3. Test Procedures

Radiated emissions from the EUT were measured according to the dictates in section 11.0 & 12.0 of KDB 558074_v03r01

2.3.1. Test Procedures for Radiated Spurious Emissions

1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation.
2. During performing radiated emission below 1 GHz, the EUT was set 3 meters away from the interference receiving antenna, which was mounted on the top of a variable-height antenna tower. During performing radiated emission above 1 GHz, the EUT was set 3 meter away from the interference-receiving antenna.
3. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

NOTE;

All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

1. Unwanted Emissions into Non-Restricted Frequency Bands
 - The Reference Level Measurement refer to section 11.1
Set analyzer center frequency to DTS channel center frequency, SPAN ≥ 1.5 times the DTS channel bandwidth, the RBW = 100 kHz and VBW $\geq 3 \times$ RBW, Detector = Peak, Sweep time = Auto couple, Trace = Max hold
 - Unwanted Emissions Level Measurement refer to section 11.2
Set the center frequency and span to encompass frequency range to be measured, the RBW = 100 kHz and VBW $\geq 3 \times$ RBW, Detector = Peak, Ensure that the number of measurement points $\geq \text{span}/\text{RBW}$, Sweep time = Auto couple, Trace = Max hold
2. Unwanted Emissions into Restricted Frequency Bands
 - Peak Power measurement procedure refer to section 12.2.4
Set RBW = 1 MHz, VBW $\geq 3 \times$ RBW, SPAN $\geq$ RBW, Detector = Peak, Sweep time = Auto couple, Trace = Max hold
 - Average Power measurements procedure refer to section 12.2.5.1
The EUT shall be configured to operate at the maximum achievable duty cycle.
Set RBW = 1 MHz, VBW $\geq 3 \times$ RBW, Detector = RMS, if $\text{span}/(\# \text{ of points in sweep}) \leq (\text{RBW}/2)$. Satisfying this condition may require increasing the number of points in the sweep or reducing the span. If this condition cannot be satisfied then the detector mode shall be set to peak,

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Averaging type = power(i.e., RMS).

- 1) As an alternative the detector and averaging type may be set for linear voltage averaging.
- 2) Some instruments require linear display mode in order to use linear voltage averaging. Log or dB averaging shall not be used. Sweep time = auto, Perform a trace average of at least 100 traces. Sweep time = auto, perform a trace average of at least 100 traces.

3. To get a maximum emission level from the EUT, the EUT is manipulated through three orthogonal planes.

2.3.2. Test Procedures for Conducted Spurious Emissions

All data rates and modes were investigated for conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

Per the guidance of KDB 558074_v03r01, section 11.1 & 11.2, the reference level for out of band emissions is established from the plots of this section since the band edge emissions are measured with a RBW of 100 kHz. This reference level is then used as the limit in subsequent plots for out of band spurious emissions shown in section 2.4.3. The limit for out of band spurious emission at the band edge is 20 dB below the fundamental emission level measured in a 100 kHz bandwidth.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

2.4. Test Results

Ambient temperature : (24 ± 2) °C
Relative humidity : 47 % R.H.

2.4.1. Radiated Spurious Emission (Worst case configuration_11b mode_1Mbps_Middle channel)

The frequency spectrum from 30 MHz to 1 000 MHz was investigated. Emission levels are not reported much lower than the limits by over 30 dB.

Radiated Emissions			Ant	Correction Factors		Total	FCC Limit	
Frequency (MHz)	Reading (dBμV)	Detect Mode	Pol.	AF (dB/m)	AMP + CL (dB)	Actual (dBμV/m)	Limit (dBμV/m)	Margin (dB)
51.18	34.96	Peak	H	14.35	-26.70	22.61	40.00	17.39
450.01	35.59	Peak	H	17.24	-25.37	27.46	46.00	18.54
800.02	37.96	Peak	H	22.37	-24.54	35.79	46.00	10.21
878.63	36.12	Peak	H	23.31	-24.17	35.26	46.00	10.74
Above 900.00	Not detected	-	-	-	-	-	-	-

Remark:

1. All spurious emission at channels are almost the same below 1 GHz, so that the middle channel was chosen at representative in final test.
2. Actual = Reading + AF + AMP + CL

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

2.4.2. Spurious Radiated Emission

The frequency spectrum above 1000 MHz was investigated. Emission levels are not reported much lower than the limits by over 30 dB.

ANT0

DSSS : 802.11b(1 Mbps)

Low Channel (2 412 MHz)

Radiated Emissions			Ant	Correction Factors		Total	FCC Limit	
Frequency (MHz)	Reading (dB μ V)	Detect Mode	Pol.	AF (dB/m)	CL (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
*2 390.00	24.18	Peak	V	28.05	7.16	59.39	74.00	14.61
*2 390.00	14.73	Average	V	28.05	7.16	49.94	54.00	4.06

Radiated Emissions			Ant	Correction Factors		Total	FCC Limit	
Frequency (MHz)	Reading (dB μ V)	Detect Mode	Pol.	AF (dB/m)	AMP+CL (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
*4 823.91	53.18	Peak	V	32.30	-32.70	52.78	74.00	21.22
*4 823.91	50.49	Average	V	32.30	-32.70	50.09	54.00	3.91
Above 4 900.00	Not Detected	-	-	-	-	-	-	-

Middle Channel (2 437 MHz)

Radiated Emissions			Ant	Correction Factors		Total	FCC Limit	
Frequency (MHz)	Reading (dB μ V)	Detect Mode	Pol.	AF (dB/m)	AMP+CL (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
*4 874.04	51.06	Peak	V	32.79	-32.46	51.39	74.00	22.61
*4 874.04	48.33	Average	V	32.79	-32.46	48.66	54.00	5.34
Above 4 900.00	Not Detected	-	-	-	-	-	-	-

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

High Channel (2 462 MHz)

Radiated Emissions			Ant	Correction Factors		Total	FCC Limit	
Frequency (MHz)	Reading (dB μ V)	Detect Mode	Pol.	AF (dB/m)	CL (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
*2 483.50	25.22	Peak	V	28.31	7.33	60.86	74.00	13.14
*2 483.50	14.65	Average	V	28.31	7.33	50.29	54.00	3.71

Radiated Emissions			Ant	Correction Factors		Total	FCC Limit	
Frequency (MHz)	Reading (dB μ V)	Detect Mode	Pol.	AF (dB/m)	AMP+CL (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
*4 924.05	44.38	Peak	V	33.10	-31.54	45.94	74.00	28.06
*4 924.05	38.83	Average	V	33.10	-31.54	40.39	54.00	13.61
Above 5 000.00	Not Detected	-	-	-	-	-	-	-

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

OFDM : 802.11g(6 Mbps)

Low Channel (2 412 MHz)

Radiated Emissions			Ant	Correction Factors		Total	FCC Limit	
Frequency (MHz)	Reading (dB μ V)	Detect Mode	Pol.	AF (dB/m)	CL (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
*2 390.00	25.10	Peak	V	28.05	7.16	60.31	74.00	13.69
*2 390.00	14.49	Average	V	28.05	7.16	49.70	54.00	4.30

Radiated Emissions			Ant	Correction Factors		Total	FCC Limit	
Frequency (MHz)	Reading (dB μ V)	Detect Mode	Pol.	AF (dB/m)	AMP+CL (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
*4 826.10	51.90	Peak	V	32.34	-32.69	51.55	74.00	22.45
*4 826.10	42.49	Average	V	32.34	-32.69	42.14	54.00	11.86
Above 4 900.00	Not Detected	-	-	-	-	-	-	-

Middle Channel (2 437 MHz)

Radiated Emissions			Ant	Correction Factors		Total	FCC Limit	
Frequency (MHz)	Reading (dB μ V)	Detect Mode	Pol.	AF (dB/m)	AMP+CL (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
*4 874.01	50.69	Peak	V	32.79	-32.46	51.02	74.00	22.98
*4 874.01	41.32	Average	V	32.79	-32.46	41.65	54.00	12.35
Above 4 900.00	Not Detected	-	-	-	-	-	-	-

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

High Channel (2 462 MHz)

Radiated Emissions			Ant	Correction Factors		Total	FCC Limit	
Frequency (MHz)	Reading (dB μ V)	Detect Mode	Pol.	AF (dB/m)	CL (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
*2 483.50	25.67	Peak	V	28.31	7.33	61.31	74.00	12.69
*2 483.50	15.31	Average	V	28.31	7.33	50.95	54.00	3.05

Radiated Emissions			Ant	Correction Factors		Total	FCC Limit	
Frequency (MHz)	Reading (dB μ V)	Detect Mode	Pol.	AF (dB/m)	AMP+CL (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
*4 923.07	42.08	Peak	V	33.10	-31.57	43.61	74.00	30.39
*4 923.07	32.67	Average	V	33.10	-31.57	34.20	54.00	19.80
Above 5 000.00	Not Detected	-	-	-	-	-	-	-

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

ANT0+ANT1
OFDM : 802.11n_HT20(MCS8)

Low Channel (2 412 MHz)

Radiated Emissions			Ant	Correction Factors		Total	FCC Limit	
Frequency (MHz)	Reading (dB μ V)	Detect Mode	Pol.	AF (dB/m)	CL (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
*2 390.00	24.74	Peak	H	28.05	7.16	59.95	74.00	14.05
*2 390.00	14.45	Average	H	28.05	7.16	49.66	54.00	4.34

Radiated Emissions			Ant	Correction Factors		Total	FCC Limit	
Frequency (MHz)	Reading (dB μ V)	Detect Mode	Pol.	AF (dB/m)	AMP+CL (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
*4 804.06	50.66	Peak	V	32.28	-32.61	50.33	74.00	23.67
*4 804.06	36.04	Average	V	32.28	-32.61	35.71	54.00	18.29
Above 4 900.00	Not Detected	-	-	-	-	-	-	-

Middle Channel (2 437 MHz)

Radiated Emissions			Ant	Correction Factors		Total	FCC Limit	
Frequency (MHz)	Reading (dB μ V)	Detect Mode	Pol.	AF (dB/m)	AMP+CL (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
*4 874.14	41.65	Peak	V	32.79	-32.46	41.98	74.00	32.02
*4 874.14	31.10	Average	V	32.79	-32.46	31.43	54.00	22.57
Above 4 900.00	Not Detected	-	-	-	-	-	-	-

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

High Channel (2 462 MHz)

Radiated Emissions			Ant	Correction Factors		Total	FCC Limit	
Frequency (MHz)	Reading (dB μ V)	Detect Mode	Pol.	AF (dB/m)	CL (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
*2 483.50	24.59	Peak	H	28.31	7.33	60.23	74.00	13.77
*2 483.50	14.78	Average	H	28.31	7.33	50.42	54.00	3.58

Radiated Emissions			Ant	Correction Factors		Total	FCC Limit	
Frequency (MHz)	Reading (dB μ V)	Detect Mode	Pol.	AF (dB/m)	AMP+CL (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
*4 925.82	42.33	Peak	V	33.12	-31.56	43.89	74.00	30.11
*4 925.82	30.65	Average	V	33.12	-31.56	32.21	54.00	21.79
Above 5 000.00	Not Detected	-	-	-	-	-	-	-

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

ANT0+ANT1
OFDM : 802.11n_HT40(MCS8)

Low Channel (2 422 MHz)

Radiated Emissions			Ant	Correction Factors		Total	FCC Limit	
Frequency (MHz)	Reading (dB μ V)	Detect Mode	Pol.	AF (dB/m)	CL (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
*2 390.00	24.33	Peak	H	28.05	7.16	59.54	74.00	14.47
*2 390.00	14.73	Average	H	28.05	7.16	49.94	54.00	4.06

Radiated Emissions			Ant	Correction Factors		Total	FCC Limit	
Frequency (MHz)	Reading (dB μ V)	Detect Mode	Pol.	AF (dB/m)	AMP+CL (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
*4 844.14	41.90	Peak	V	32.56	-32.34	42.12	74.00	31.88
*4 844.14	32.20	Average	V	32.56	-32.34	32.42	54.00	21.58
Above 4 900.00	Not Detected	-	-	-	-	-	-	-

Middle Channel (2 437 MHz)

Radiated Emissions			Ant	Correction Factors		Total	FCC Limit	
Frequency (MHz)	Reading (dB μ V)	Detect Mode	Pol.	AF (dB/m)	AMP+CL (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
*4 874.23	41.51	Peak	V	32.79	-32.46	41.84	74.00	32.16
*4 874.23	31.80	Average	V	32.79	-32.46	32.13	54.00	21.87
Above 4 900.00	Not Detected	-	-	-	-	-	-	-

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

High Channel (2 452 MHz)

Radiated Emissions			Ant	Correction Factors		Total	FCC Limit	
Frequency (MHz)	Reading (dB μ V)	Detect Mode	Pol.	AF (dB/m)	CL (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
*2 483.50	24.99	Peak	H	28.31	7.33	60.63	74.00	13.37
*2 483.50	15.17	Average	H	28.31	7.33	50.81	54.00	3.19

Radiated Emissions			Ant	Correction Factors		Total	FCC Limit	
Frequency (MHz)	Reading (dB μ V)	Detect Mode	Pol.	AF (dB/m)	AMP+CL (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
*4 903.98	41.69	Peak	V	33.00	-31.86	42.83	74.00	31.17
*4 903.98	30.70	Average	V	33.00	-31.86	31.84	54.00	22.16
Above 5 000.00	Not Detected	-	-	-	-	-	-	-

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

ANT0

802.11a (6 Mbps)

A. Low Channel (5 745 MHz)

Radiated Emissions			Ant	Correction Factors		Total	Limit	
Frequency (MHz)	Reading (dB uV)	Detect Mode	Pol.	AF (dB/m)	CL (dB)	Actual (dB uV/m)	Limit (dB uV/m)	Margin (dB)
5 741.27	58.96	Peak	V	34.17	12.06	105.19	-	-

Frequency (MHz)	Reading (dB uV)	Detect Mode	Pol.	AF (dB/m)	Amp Gain +CL (dB)	Actual (dB uV/m)	Limit (dB uV/m)	Margin (dB)
*7 659.96	36.82	Peak	V	35.82	-26.64	46.00	74.00	28.01
*7 659.96	25.19	Average	V	35.82	-26.64	34.37	54.00	19.63
*11 490.94	36.82	Peak	V	38.39	-26.56	48.65	74.00	25.36
*11 490.94	25.19	Average	V	38.39	-26.56	37.02	54.00	16.98
Above 11 500.00	Not Detected	-	-	-	-	-	-	-

B. Middle Channel (5 785 MHz)

Radiated Emissions			Ant	Correction Factors		Total	Limit	
Frequency (MHz)	Reading (dB uV)	Detect Mode	Pol.	AF (dB/m)	CL (dB)	Actual (dB uV/m)	Limit (dB uV/m)	Margin (dB)
5 785.00	56.66	Peak	V	34.08	12.17	102.91	-	-

Frequency (MHz)	Reading (dB uV)	Detect Mode	Pol.	AF (dB/m)	Amp Gain +CL (dB)	Actual (dB uV/m)	Limit (dB uV/m)	Margin (dB)
*7 713.36	35.95	Peak	V	35.94	-27.76	44.13	74.00	29.87
*7 713.36	26.12	Average	V	35.94	-27.76	34.30	54.00	19.70
*11 571.02	35.95	Peak	V	38.42	-26.55	47.82	74.00	26.18
*11 571.02	26.12	Average	V	38.42	-26.55	37.99	54.00	16.01
Above 11 600.00	Not Detected	-	-	-	-	-	-	-

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

C. High Channel (5 825 MHz)

Radiated Emissions			Ant	Correction Factors		Total	Limit	
Frequency (MHz)	Reading (dB uV)	Detect Mode	Pol.	AF (dB/m)	CL (dB)	Actual (dB uV/m)	Limit (dB uV/m)	Margin (dB)
5 825.00	55.30	Peak	V	34.10	12.05	101.45	-	-

Frequency (MHz)	Reading (dB uV)	Detect Mode	Pol.	AF (dB/m)	Amp Gain +CL (dB)	Actual (dB uV/m)	Limit (dB uV/m)	Margin (dB)
*11 649.98	35.63	Peak	V	38.36	-26.70	47.29	74.00	26.72
*11 649.98	25.38	Average	V	38.36	-26.70	37.04	54.00	16.96
Above 11 700.00	Not Detected	-	-	-	-	-	-	-

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

ANT0+ANT1

802.11n-HT20 (MCS8)

A. Low Channel (5 745 MHz)

Radiated Emissions			Ant	Correction Factors		Total	Limit	
Frequency (MHz)	Reading (dB uV)	Detect Mode	Pol.	AF (dB/m)	CL (dB)	Actual (dB uV/m)	Limit (dB uV/m)	Margin (dB)
5 745.00	57.96	Peak	V	34.16	12.10	104.22	-	-

Frequency (MHz)	Reading (dB uV)	Detect Mode	Pol.	AF (dB/m)	Amp Gain +CL (dB)	Actual (dB uV/m)	Limit (dB uV/m)	Margin (dB)
*11 489.61	36.02	Peak	V	38.38	-26.57	47.83	74.00	26.17
*11 489.61	25.94	Average	V	38.38	-26.57	37.75	54.00	16.26
Above 11 500.00	Not Detected	-	-	-	-	-	-	-

B. Middle Channel (5 785 MHz)

Radiated Emissions			Ant	Correction Factors		Total	Limit	
Frequency (MHz)	Reading (dB uV)	Detect Mode	Pol.	AF (dB/m)	CL (dB)	Actual (dB uV/m)	Limit (dB uV/m)	Margin (dB)
5 785.00	59.43	Peak	V	34.08	12.17	105.68	-	-

Frequency (MHz)	Reading (dB uV)	Detect Mode	Pol.	AF (dB/m)	Amp Gain +CL (dB)	Actual (dB uV/m)	Limit (dB uV/m)	Margin (dB)
*11 570.74	35.66	Peak	V	38.42	-26.55	47.53	74.00	26.47
*11 570.74	26.33	Average	V	38.42	-26.55	38.20	54.00	15.80
Above 11 600.00	Not Detected	-	-	-	-	-	-	-

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

C. High Channel (5 825 MHz)

Radiated Emissions			Ant	Correction Factors		Total	Limit	
Frequency (MHz)	Reading (dB uV)	Detect Mode	Pol.	AF (dB/m)	CL (dB)	Actual (dB uV/m)	Limit (dB uV/m)	Margin (dB)
5 825.00	63.93	Peak	V	34.10	12.05	110.08	-	-

Frequency (MHz)	Reading (dB uV)	Detect Mode	Pol.	AF (dB/m)	Amp Gain +CL (dB)	Actual (dB uV/m)	Limit (dB uV/m)	Margin (dB)
*11 650.53	35.51	Peak	V	38.36	-26.70	47.17	74.00	26.83
*11 650.53	25.41	Average	V	38.36	-26.70	37.07	54.00	16.93
Above 11 700.00	Not Detected	-	-	-	-	-	-	-

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

802.11n_HT40(MCS8)

A. Low Channel (5 755 MHz)

Radiated Emissions			Ant	Correction Factors		Total	Limit	
Frequency (MHz)	Reading (dB uV)	Detect Mode	Pol.	AF (dB/m)	CL (dB)	Actual (dB uV/m)	Limit (dB uV/m)	Margin (dB)
5 755.00	55.55	Peak	V	34.11	12.16	101.82	-	-

Frequency (MHz)	Reading (dB uV)	Detect Mode	Pol.	AF (dB/m)	Amp Gain +CL (dB)	Actual (dB uV/m)	Limit (dB uV/m)	Margin (dB)
*11 509.32	36.91	Peak	V	38.47	-26.55	48.83	74.00	25.17
*11 509.32	26.36	Average	V	38.47	-26.55	38.28	54.00	15.73
Above 11 600.00	Not Detected	-	-	-	-	-	-	-

B. High Channel (5 795 MHz)

Radiated Emissions			Ant	Correction Factors		Total	Limit	
Frequency (MHz)	Reading (dB uV)	Detect Mode	Pol.	AF (dB/m)	CL (dB)	Actual (dB uV/m)	Limit (dB uV/m)	Margin (dB)
5 795.00	55.58	Peak	V	34.03	12.17	101.78	-	-

Frequency (MHz)	Reading (dB uV)	Detect Mode	Pol.	AF (dB/m)	Amp Gain +CL (dB)	Actual (dB uV/m)	Limit (dB uV/m)	Margin (dB)
*11 590.01	37.27	Peak	V	38.40	-26.55	49.12	74.00	24.88
*11 590.01	26.09	Average	V	38.40	-26.55	37.94	54.00	16.06
Above 11 600.00	Not Detected	-	-	-	-	-	-	-

Remarks :

1. "*" means the restricted band.
2. Radiated emissions measured in frequency above 1 000 MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Actual = Reading + AF + AMP + CL

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

2.4.3. Spurious RF Conducted Emissions: Plot of Spurious RF Conducted Emission


ANT0

DSSS : 802.11b(1 Mbps)

Low Channel



The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

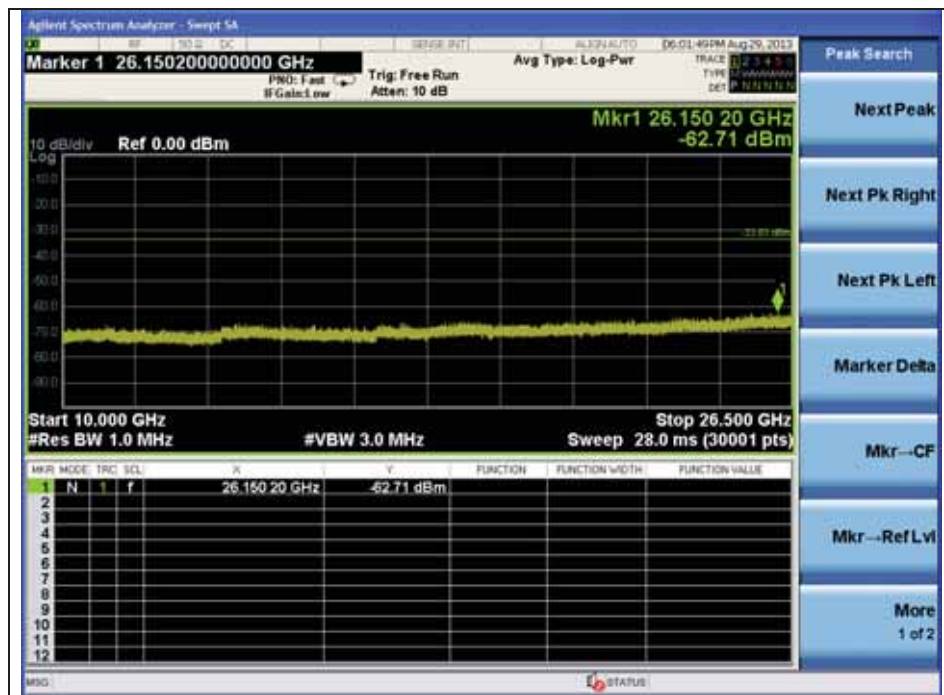

Note:

Offset (dB) = Attenuator (dB) + Cable loss (dB)

Result (dB m) = Spurious offset (dB) + Reading values (dB m)


Frequency (MHz)	offset (dB)	Reading values (dB m)	Result (dB m)
2 390.00	16.74	-76.21	-59.47
2 400.00	16.78	-59.54	-42.76
4 824.60	17.86	-58.47	-40.61
26 150.20	-	Noise level	-

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Middle Channel



The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

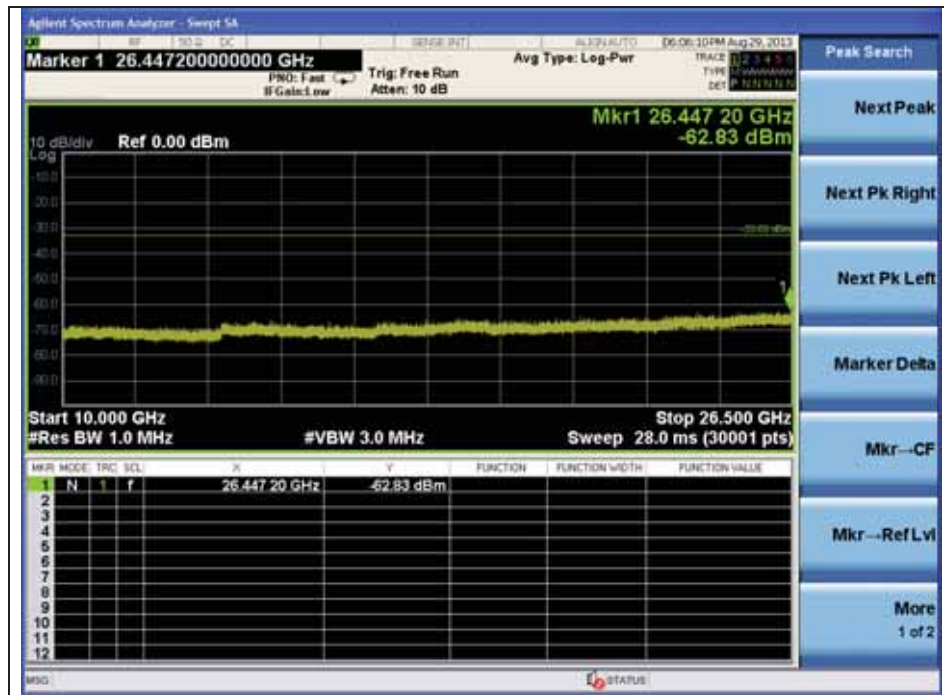

Note:

Offset (dB) = Attenuator (dB) + Cable loss (dB)

Result (dB m) = Spurious offset (dB) + Reading values (dB m)


Frequency (MHz)	offset (dB)	Reading values (dB m)	Result (dB m)
4 874.40	17.93	-60.48	-42.55
26 447.20	-	Noise level	-

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

High Channel



The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

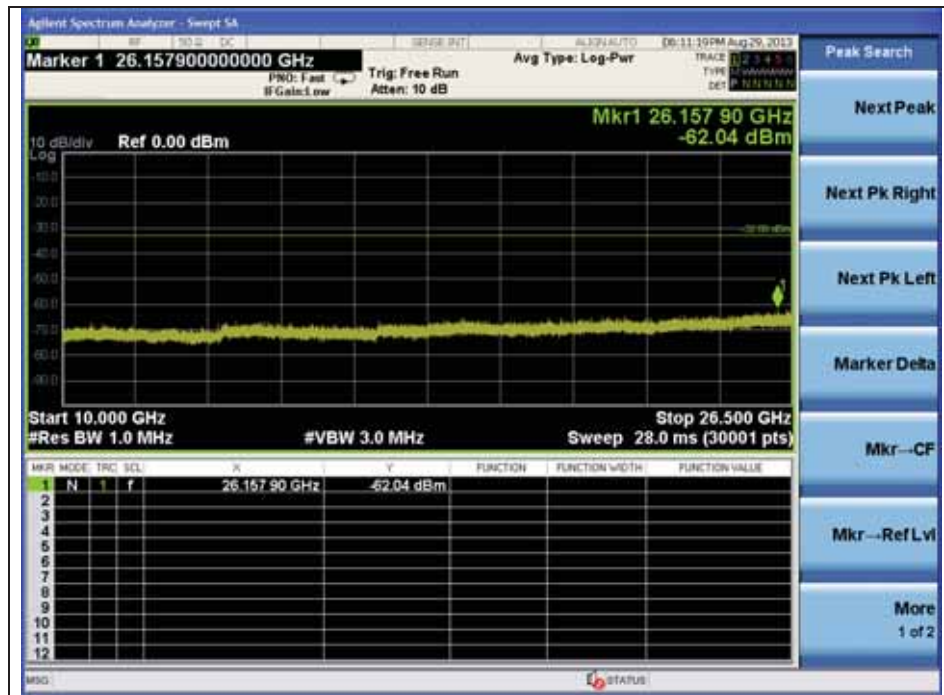

Note:


Offset (dB) = Attenuator (dB) + Cable loss (dB)

Result (dB m) = Spurious offset (dB) + Reading values (dB m)


Frequency (MHz)	offset (dB)	Reading values (dB m)	Result (dB m)
2 483.50	16.82	-73.42	-56.60
4 924.60	17.86	-63.03	-45.17
26 157.90	-	Noise level	-

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

OFDM : 802.11g(6 Mbps) Low Channel

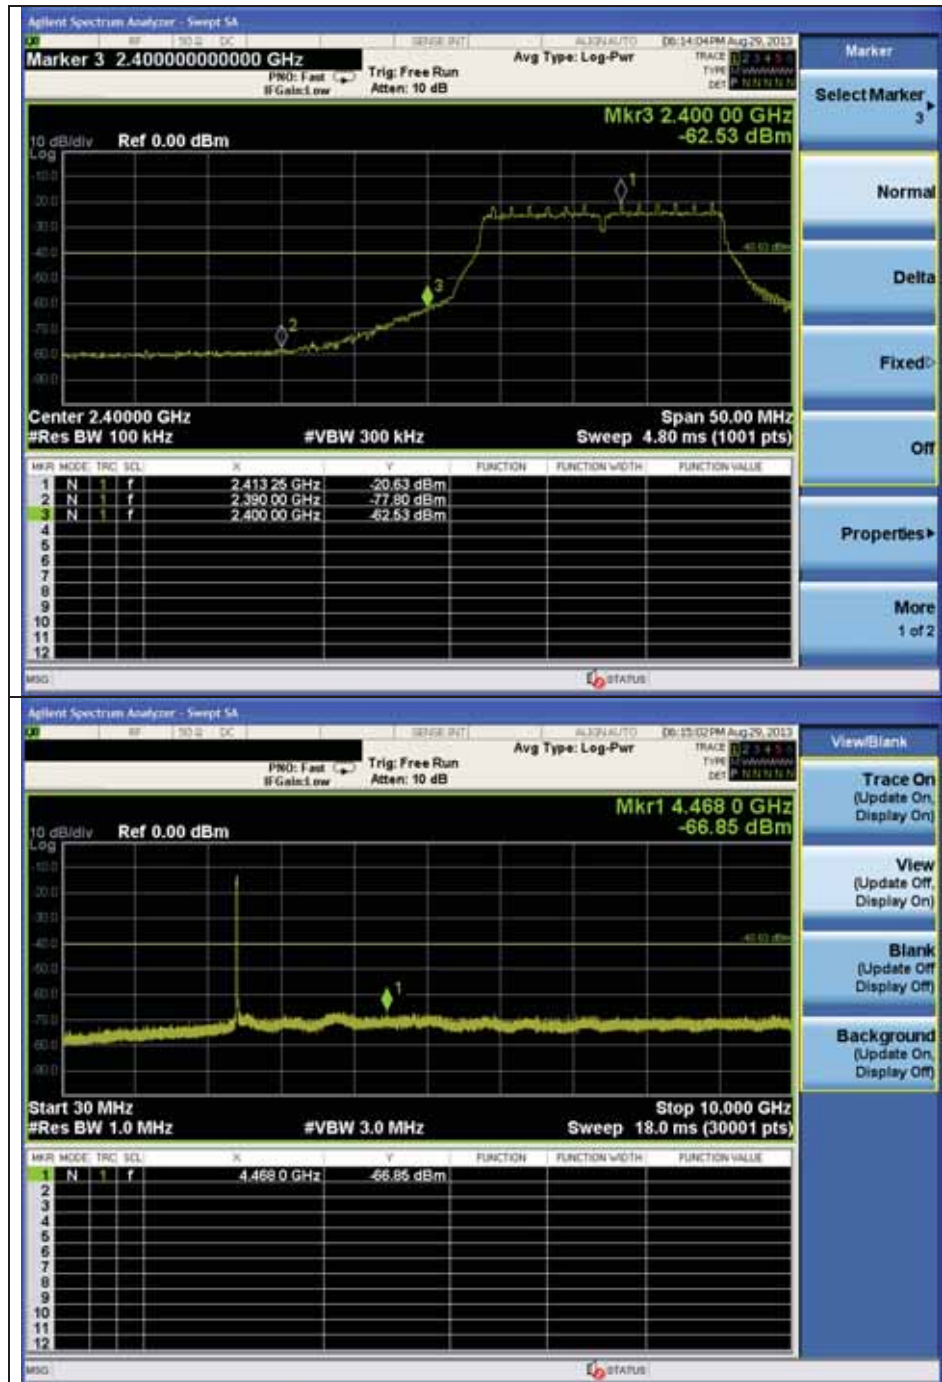

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

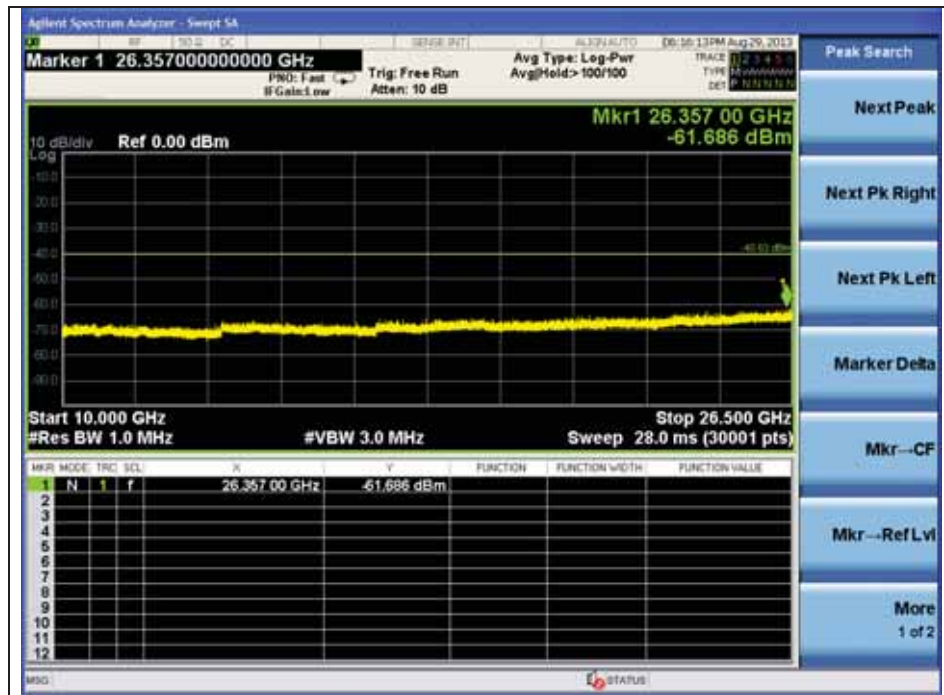

Note:


Offset (dB) = Attenuator (dB) + Cable loss (dB)

Result (dB m) = Spurious offset (dB) + Reading values (dB m)


Frequency (MHz)	offset (dB)	Reading values (dB m)	Result (dB m)
2 390.00	16.74	-77.80	-61.06
2 400.00	16.78	-62.53	-45.75
4 468.00	17.59	-66.85	-49.26
26 357.00	-	Noise level	-

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Middle Channel

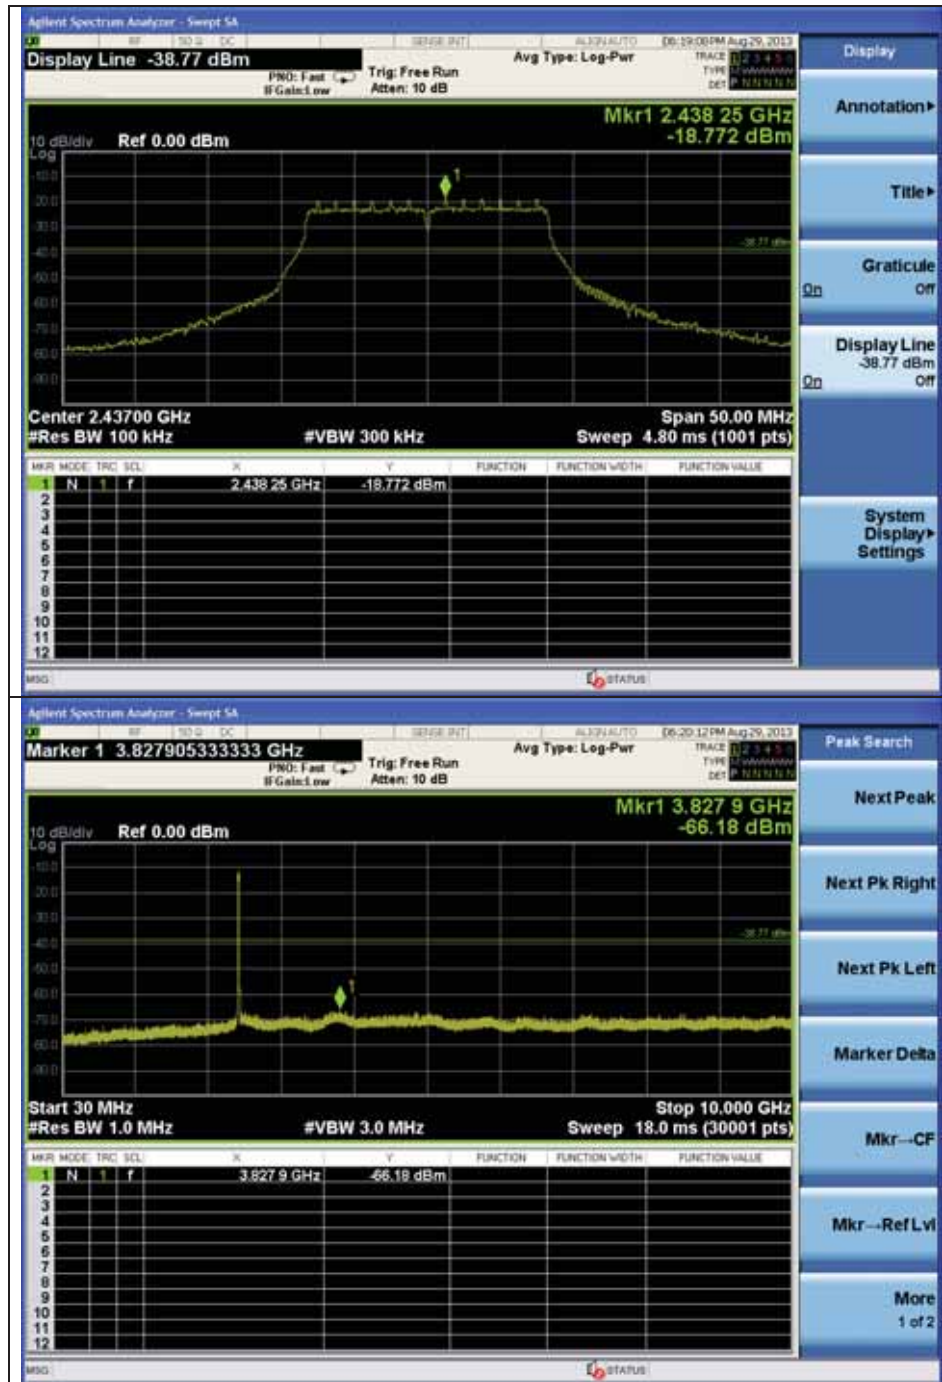

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

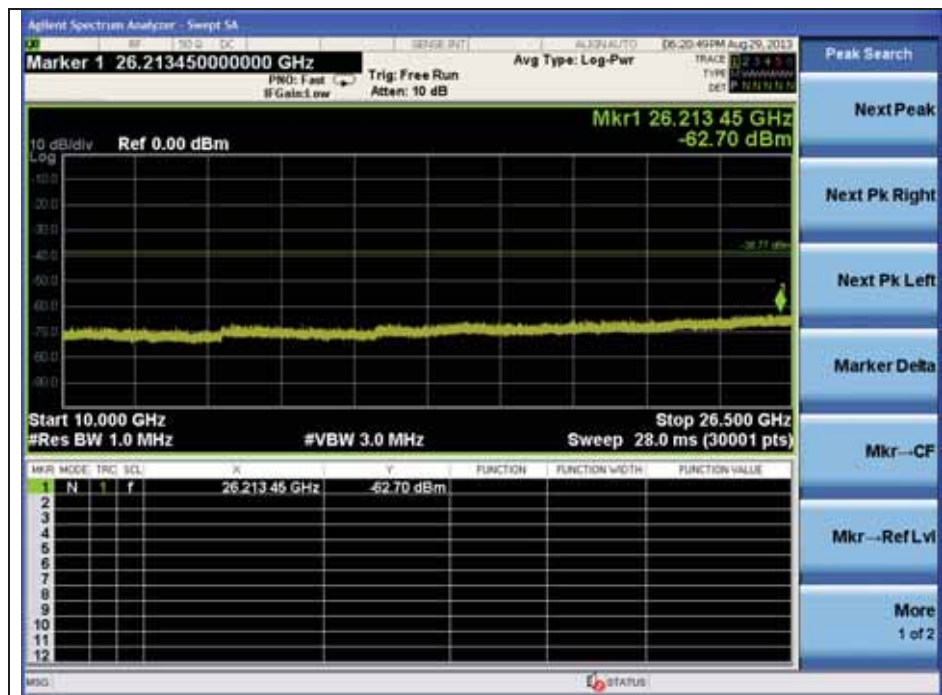

Note:


Offset (dB) = Attenuator (dB) + Cable loss (dB)

Result (dB m) = Spurious offset (dB) + Reading values (dB m)


Frequency (MHz)	offset (dB)	Reading values (dB m)	Result (dB m)
3 827.90	-	Noise level	-
26 213.45	-	Noise level	-

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

High Channel

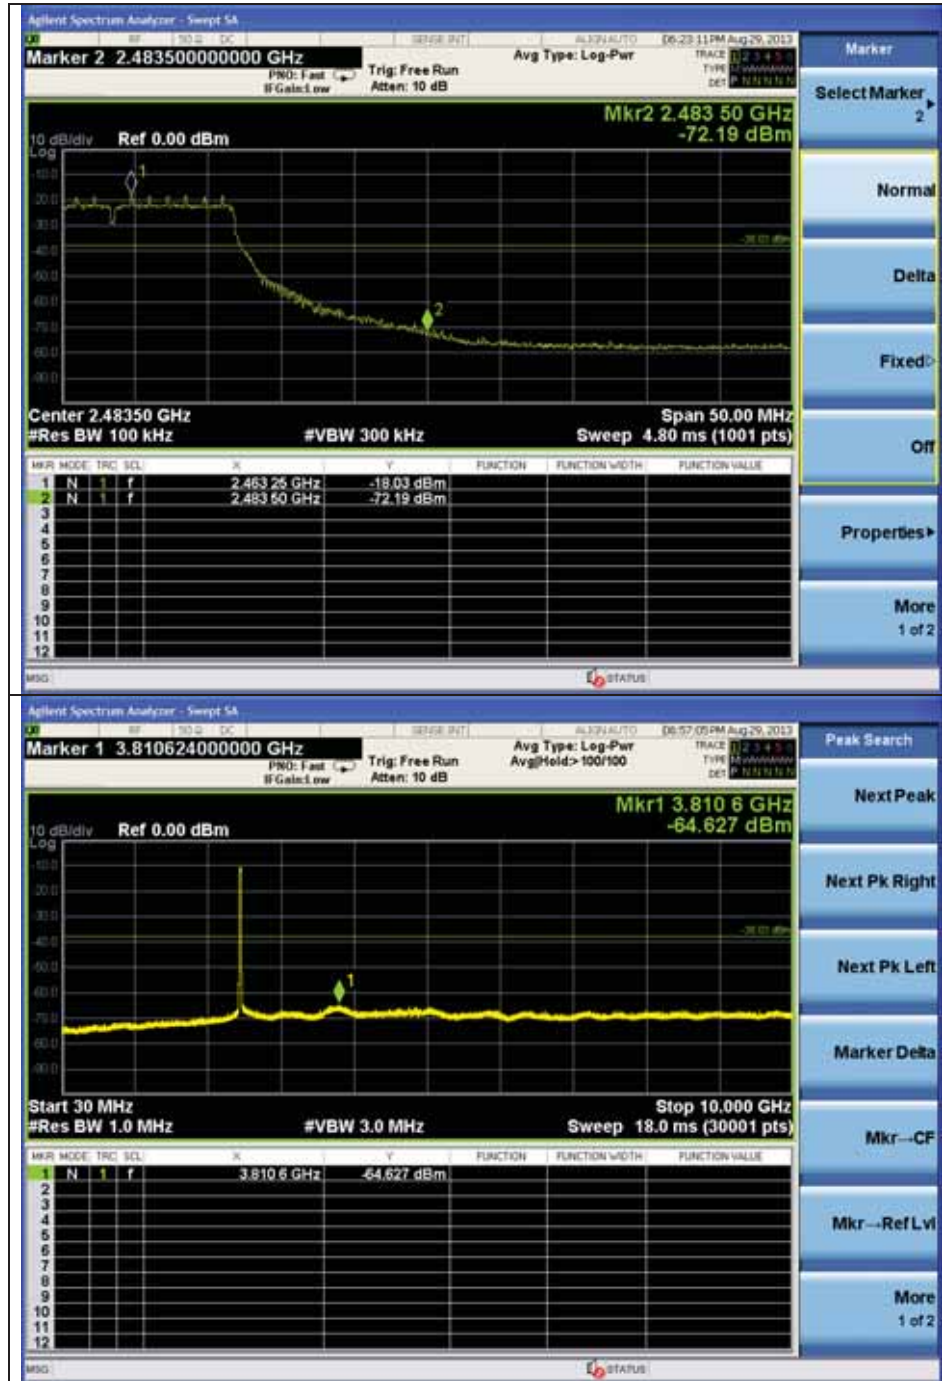

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

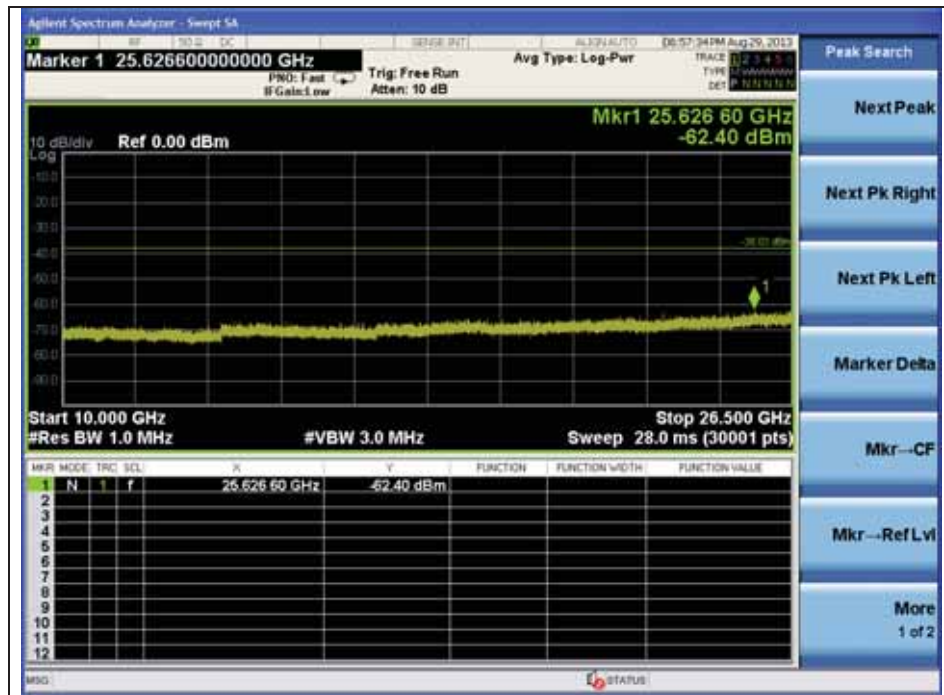

Note:


Offset (dB) = Attenuator (dB) + Cable loss (dB)

Result (dB m) = Spurious offset (dB) + Reading values (dB m)


Frequency (MHz)	offset (dB)	Reading values (dB m)	Result (dB m)
2 483.50	16.82	-72.19	-55.37
3 810.60	-	Noise level	-
25 626.60	-	Noise level	-

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

OFDM : 802.11n_HT20(MCS8) Low Channel

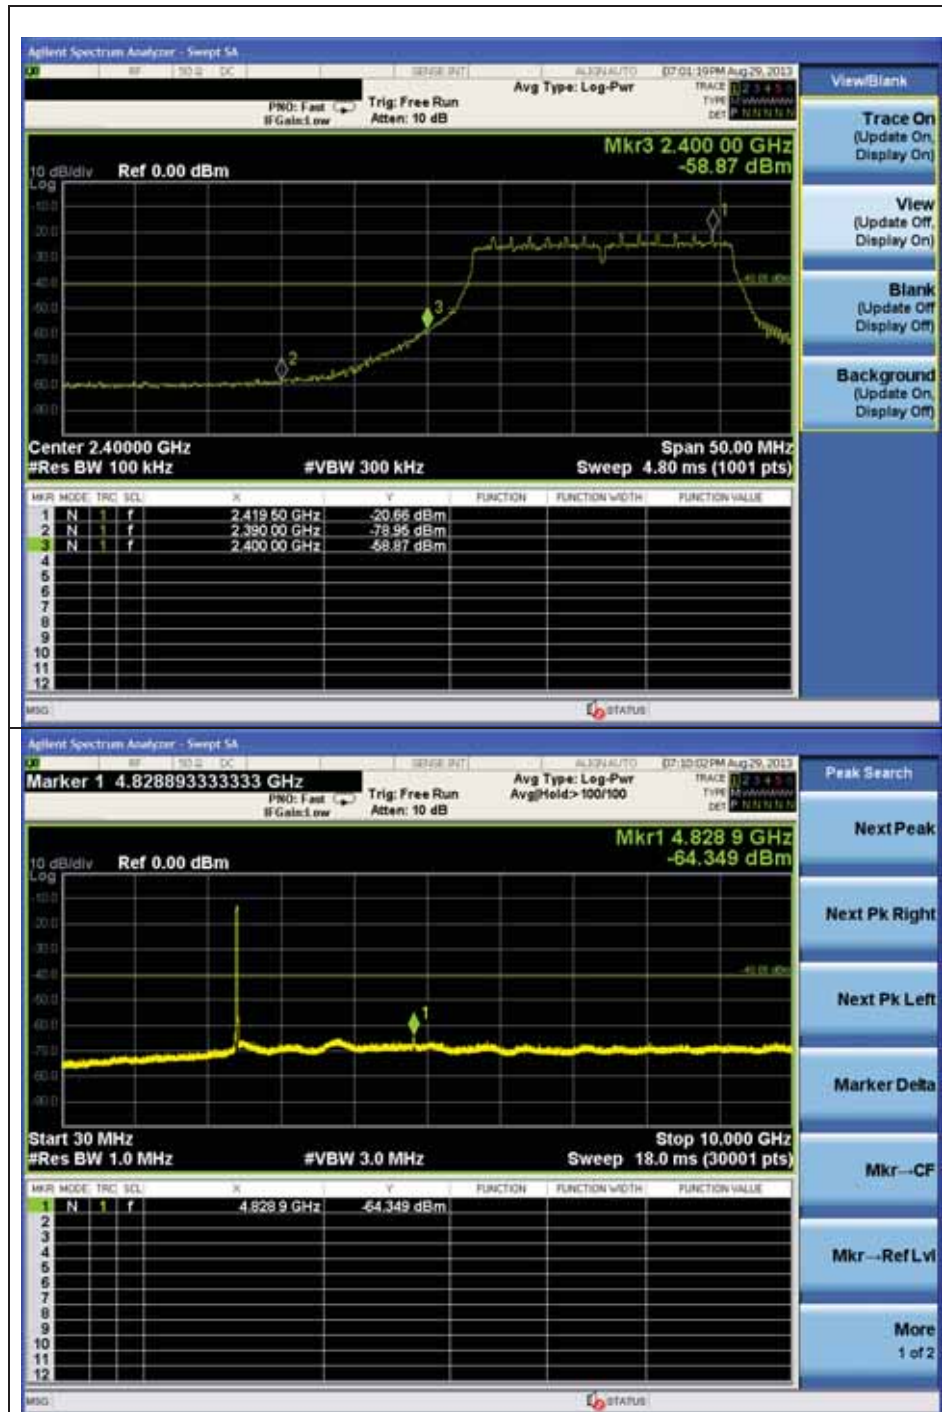

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

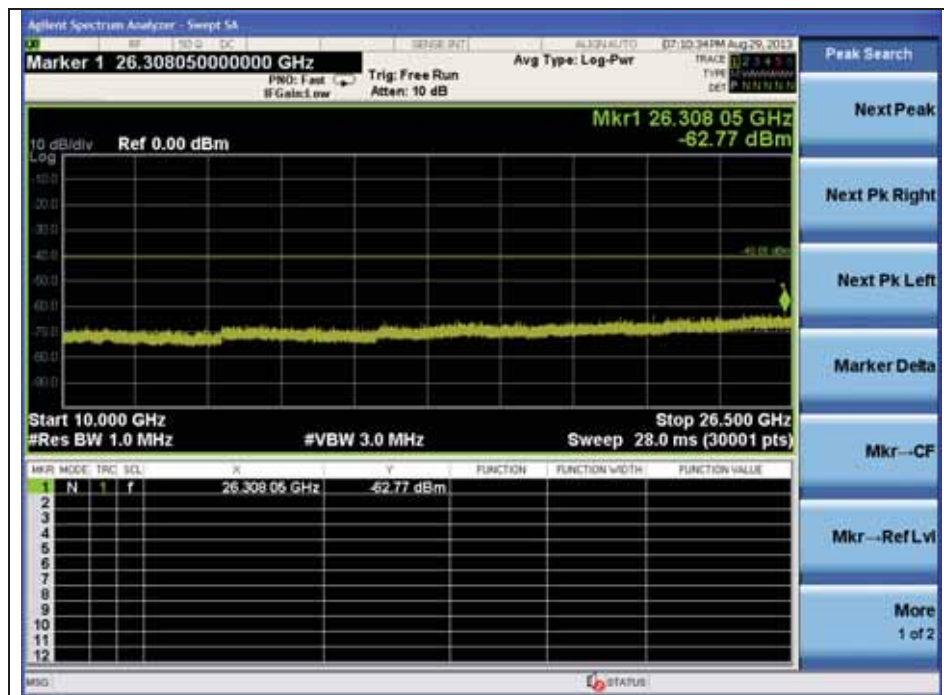

Note:


Offset (dB) = Attenuator (dB) + Cable loss (dB)

Result (dB m) = Spurious offset (dB) + Reading values (dB m)


Frequency (MHz)	offset (dB)	Reading values (dB m)	Result (dB m)
2 390.00	16.74	-78.95	-62.21
2 400.00	16.78	-58.87	-42.09
4 828.90	17.86	-64.35	-46.49
26 308.05	-	Noise level	-

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Middle Channel

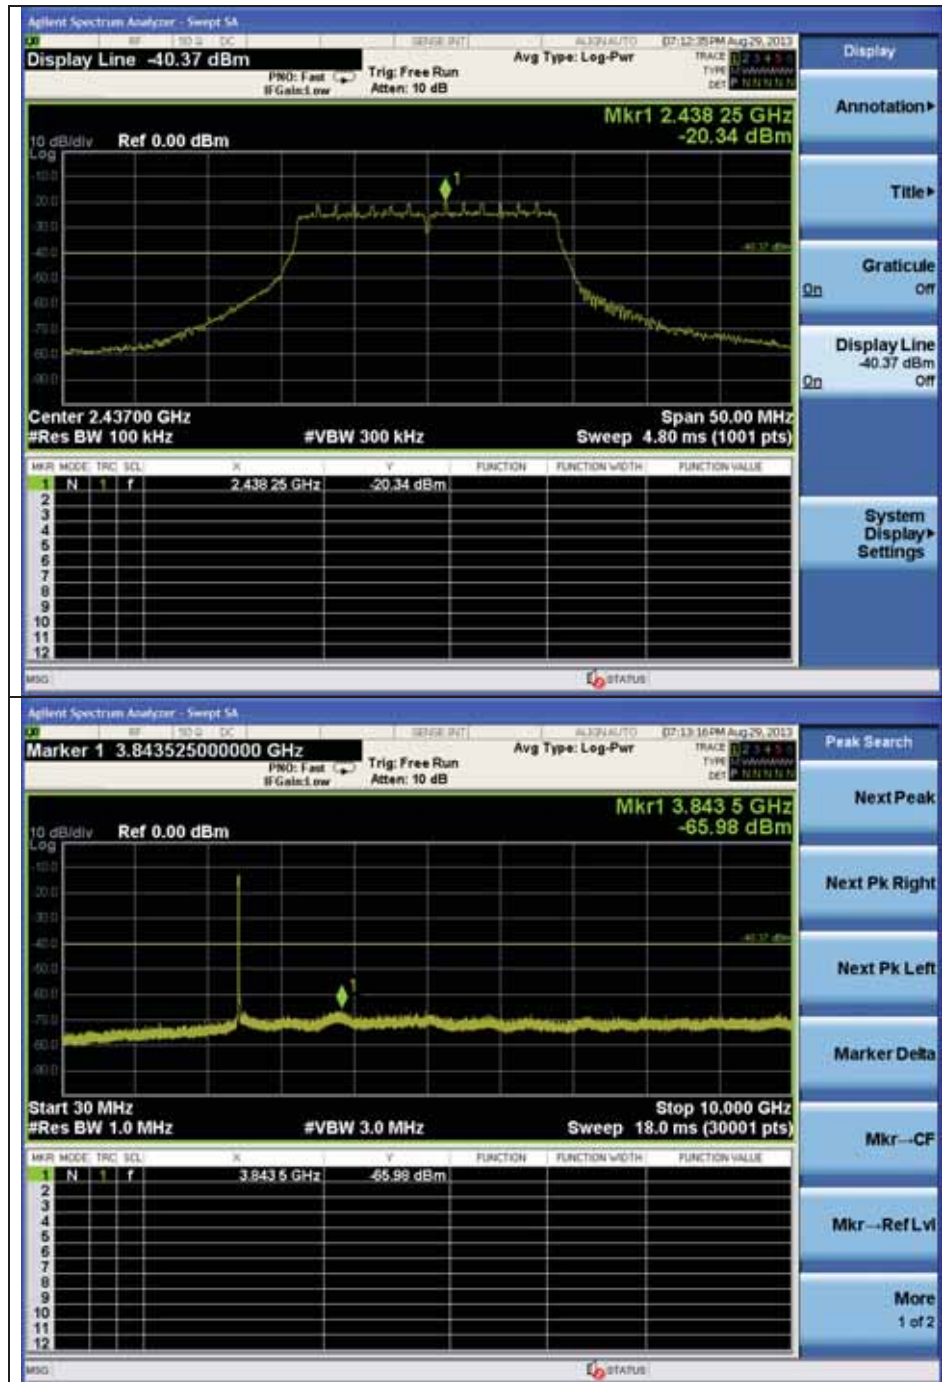

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

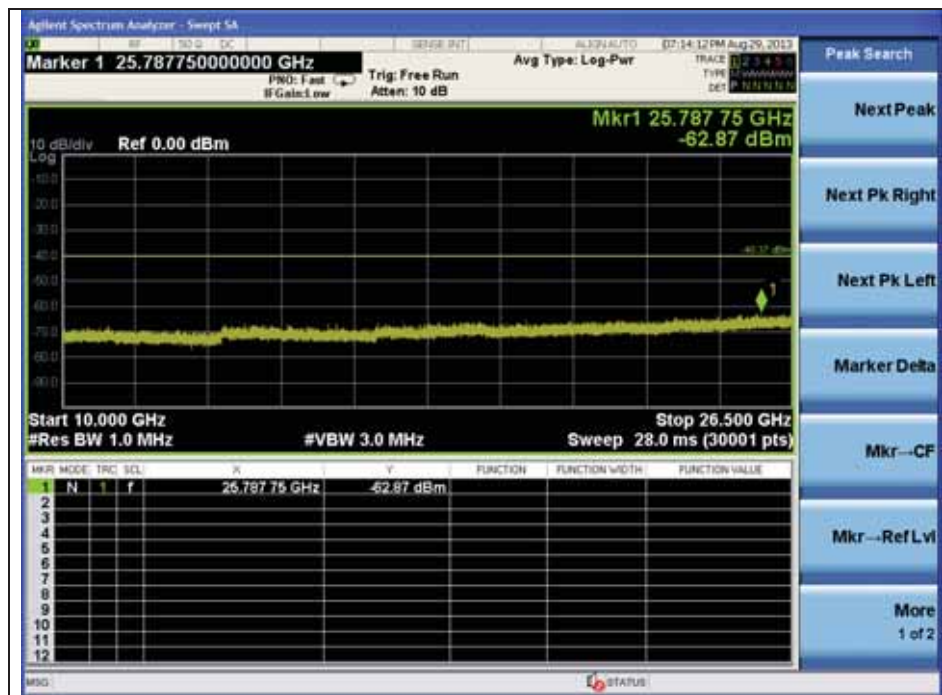

Note:


Offset (dB) = Attenuator (dB) + Cable loss (dB)

Result (dB m) = Spurious offset (dB) + Reading values (dB m)


Frequency (MHz)	offset (dB)	Reading values (dB m)	Result (dB m)
3 843.50	-	Noise level	-
25 787.75	-	Noise level	-

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

High Channel

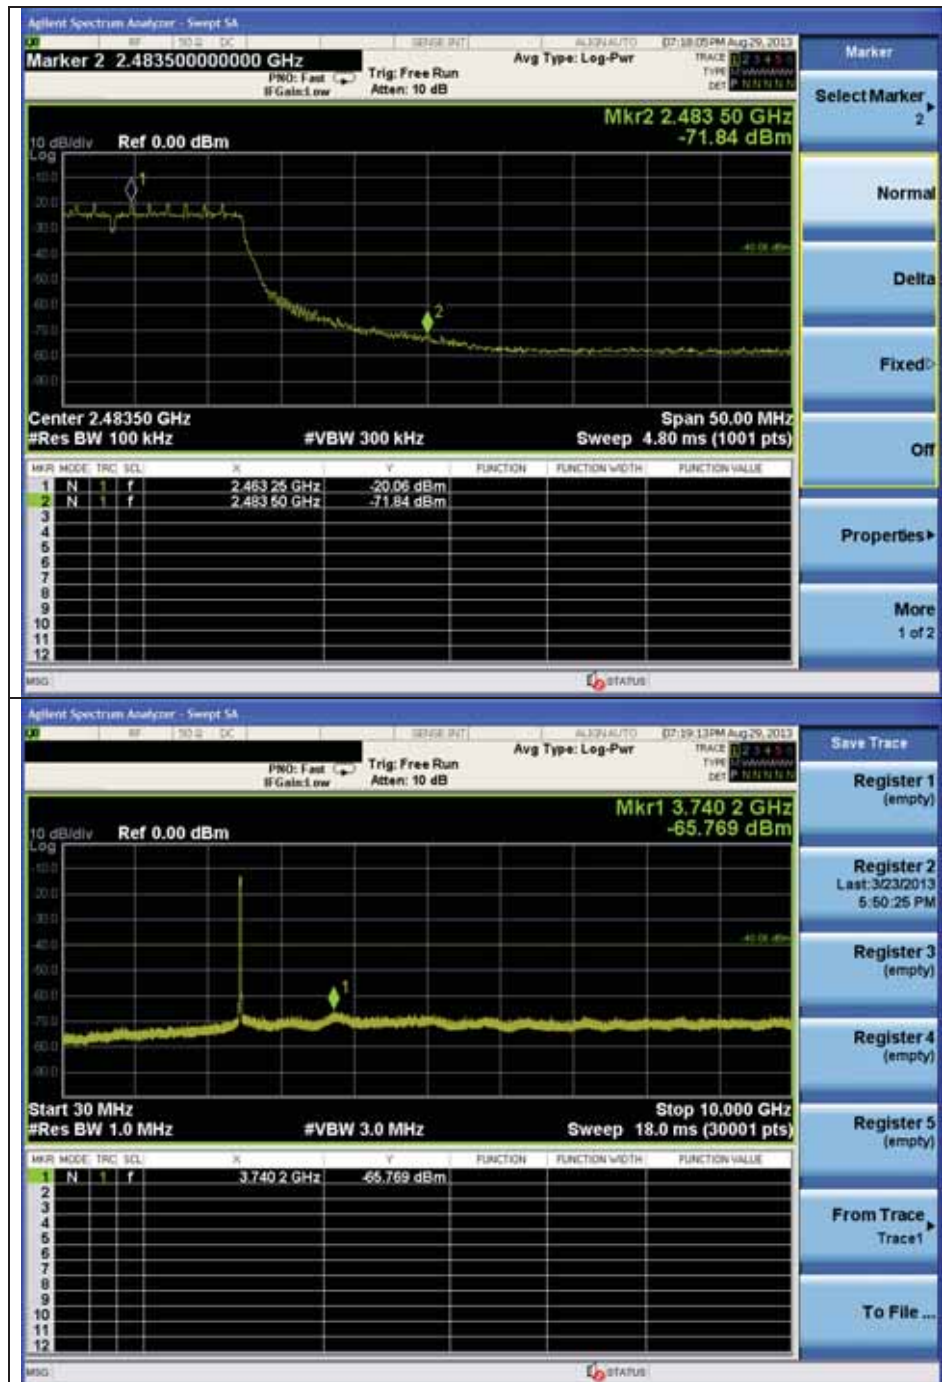

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

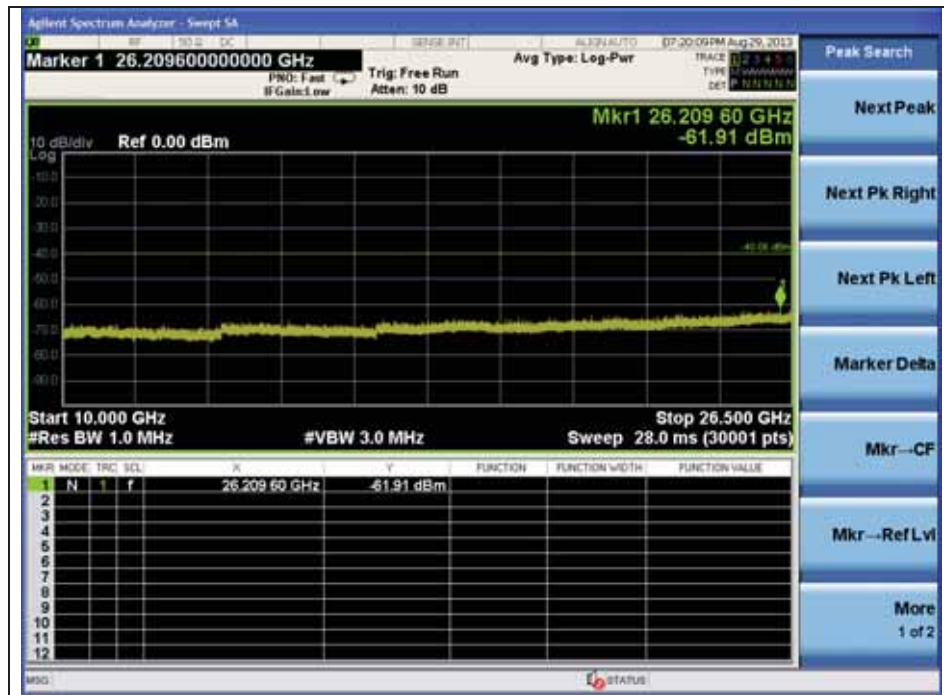

Note:


Offset (dB) = Attenuator (dB) + Cable loss (dB)

Result (dB m) = Spurious offset (dB) + Reading values (dB m)


Frequency (MHz)	offset (dB)	Reading values (dB m)	Result (dB m)
2 483.50	16.82	-71.84	-55.02
3 740.20	-	Noise level	-
26 209.60	-	Noise level	-

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

OFDM : 802.11n_HT40(MCS8) Low Channel

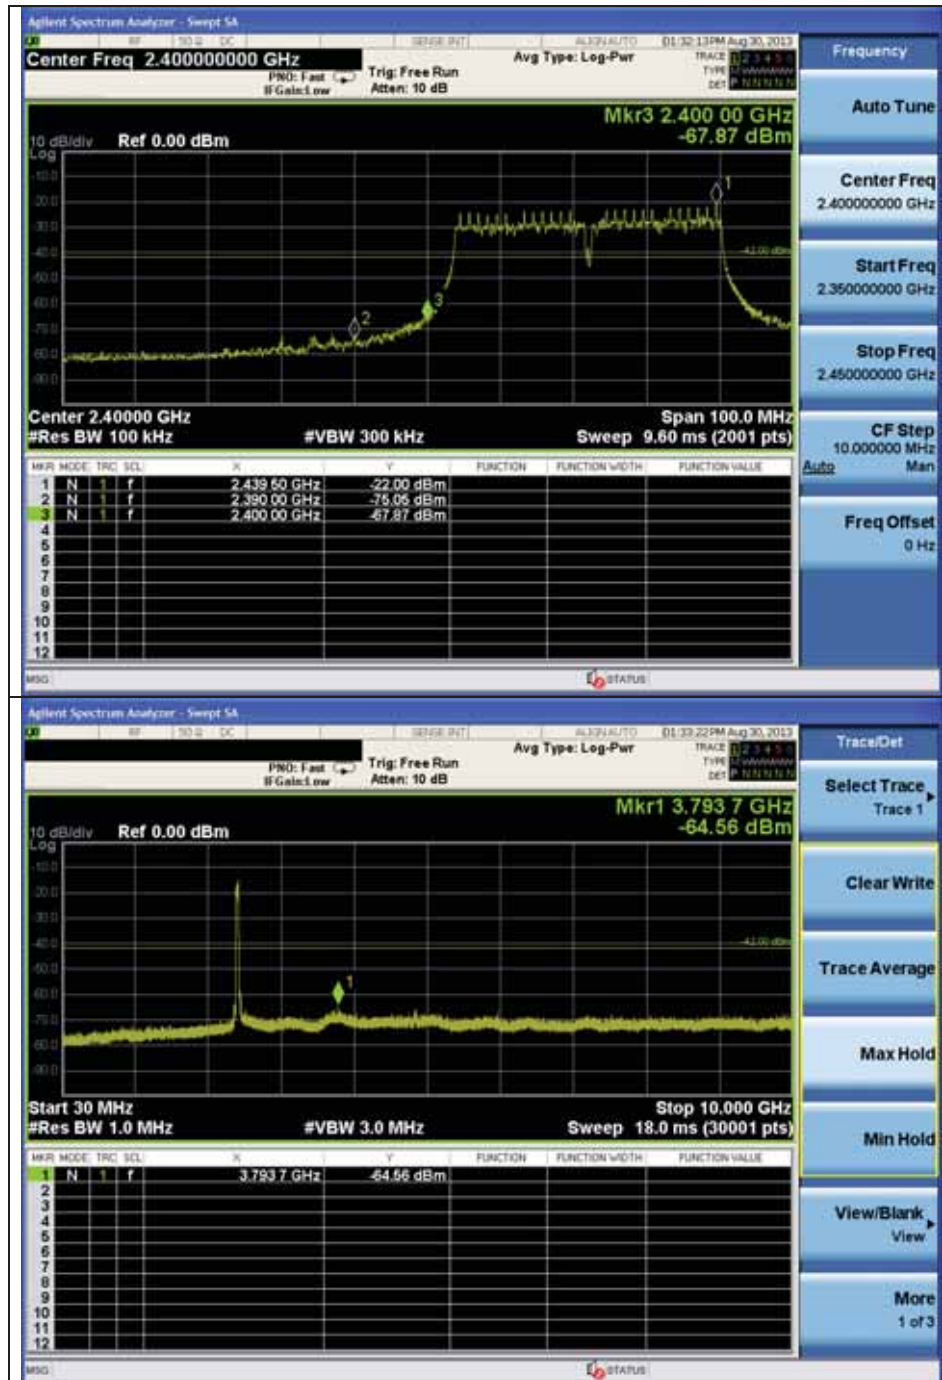

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

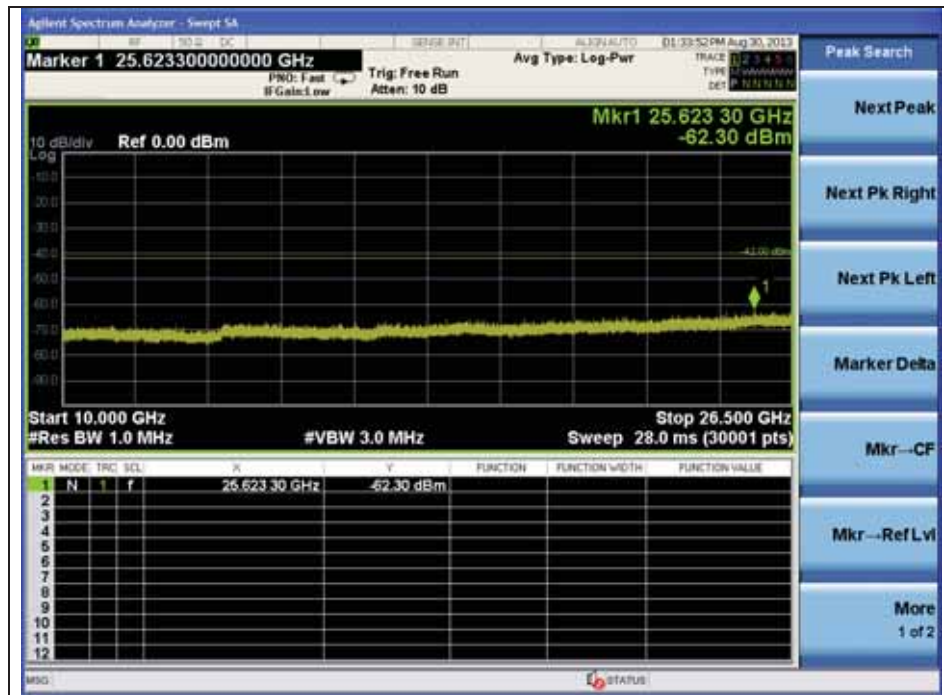

Note:


Offset (dB) = Attenuator (dB) + Cable loss (dB)

Result (dB m) = Spurious offset (dB) + Reading values (dB m)


Frequency (MHz)	offset (dB)	Reading values (dB m)	Result (dB m)
2 390.00	16.74	-75.05	-58.31
2 400.00	16.78	-67.87	-51.09
3 793.70	-	Noise level	-
25 623.30	-	Noise level	-

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Middle Channel

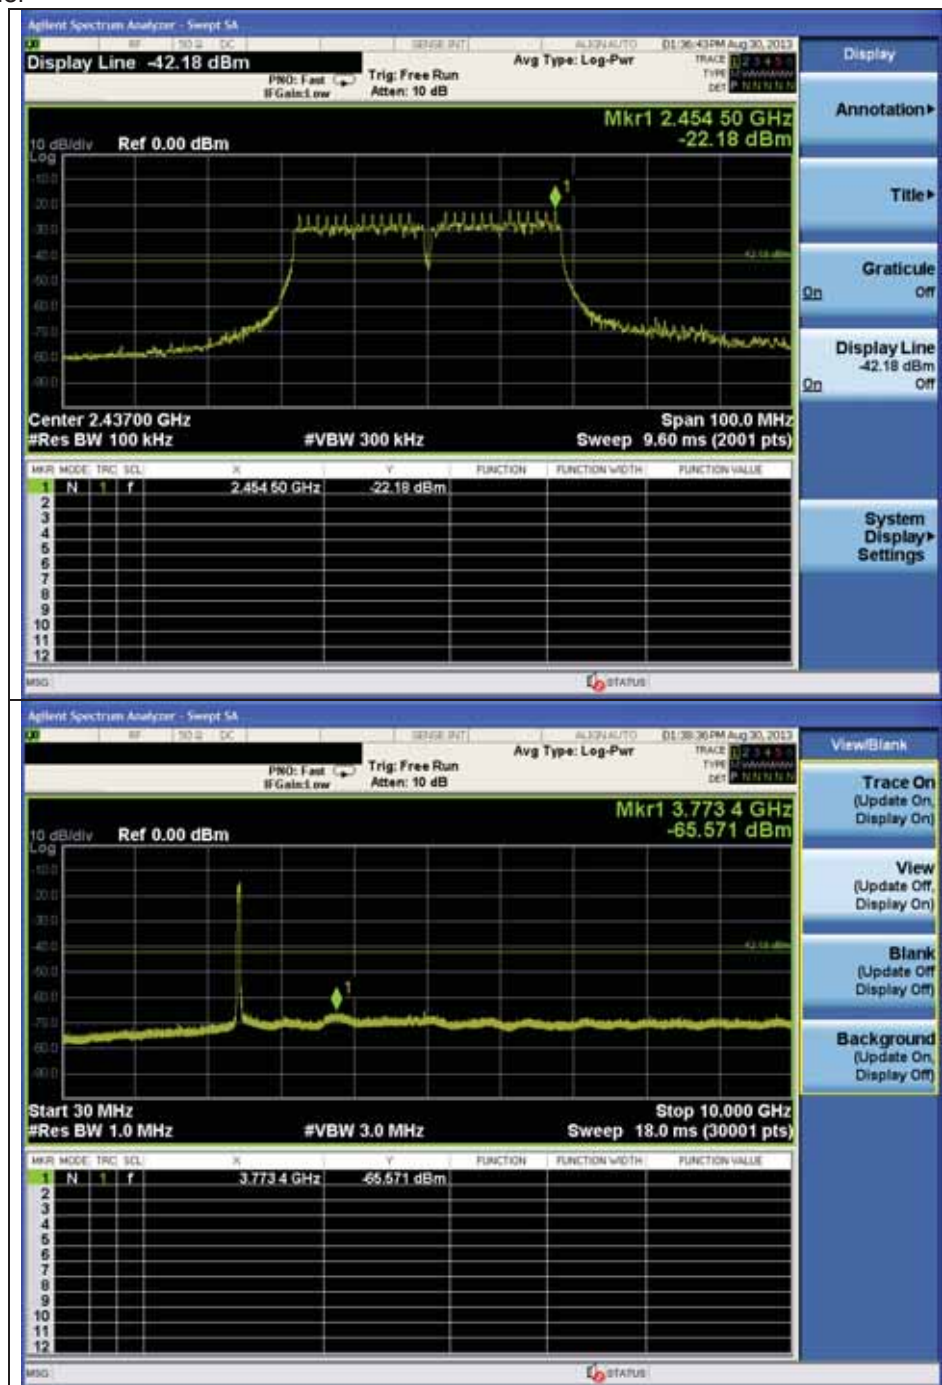

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

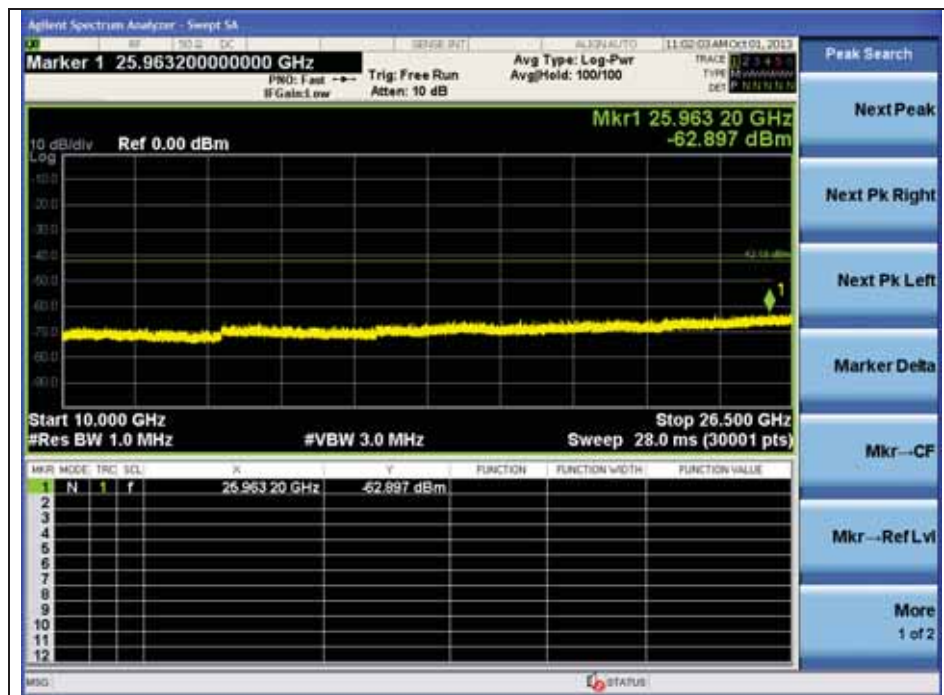

Note:


Offset (dB) = Attenuator (dB) + Cable loss (dB)

Result (dB m) = Spurious offset (dB) + Reading values (dB m)


Frequency (MHz)	offset (dB)	Reading values (dB m)	Result (dB m)
3 773.40	-	Noise level	-
25 963.20	-	Noise level	-

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

High Channel

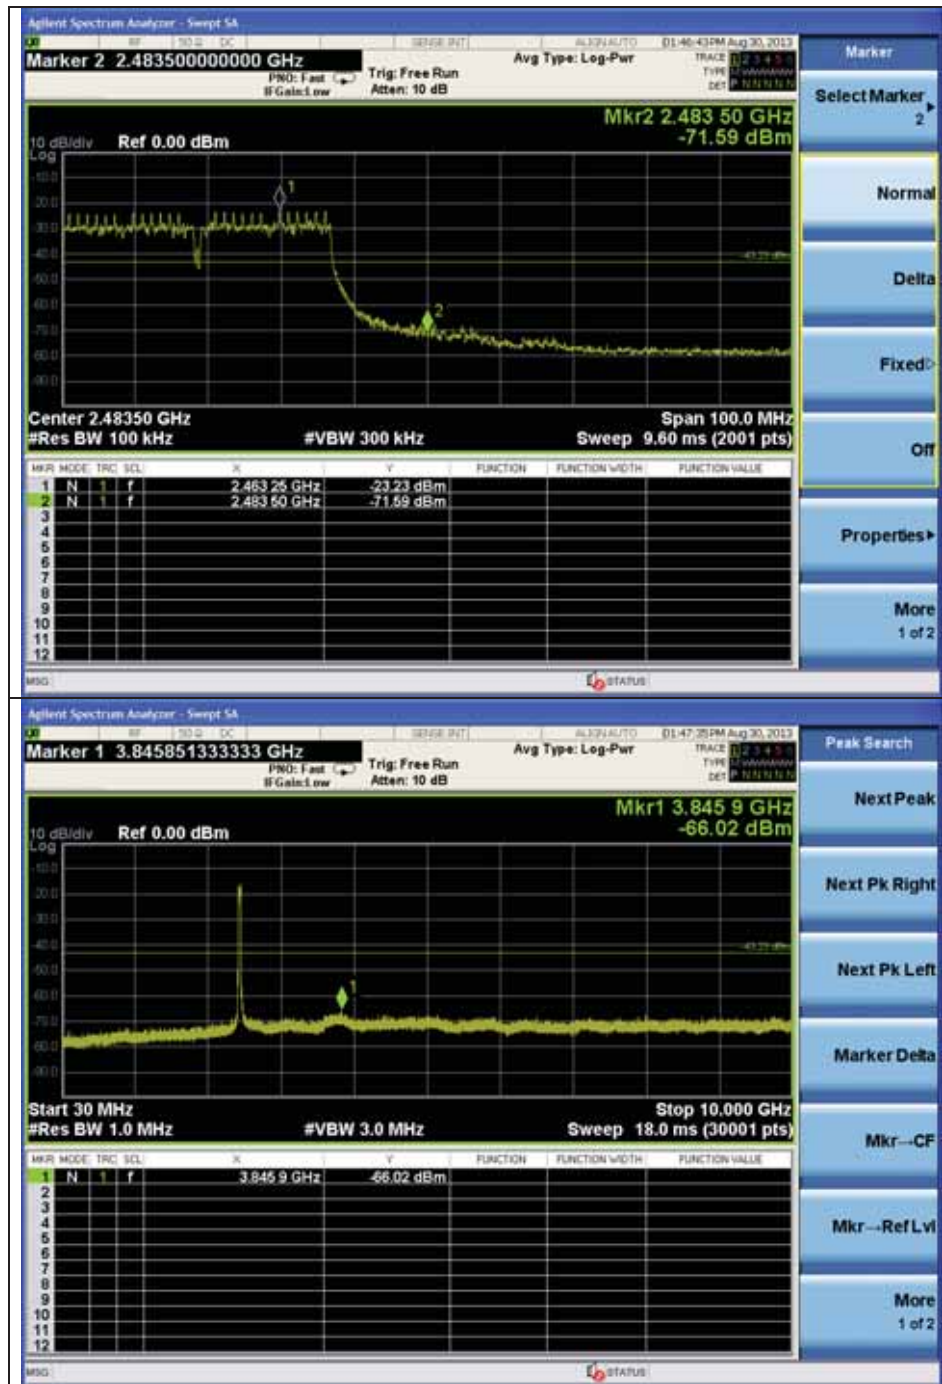

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

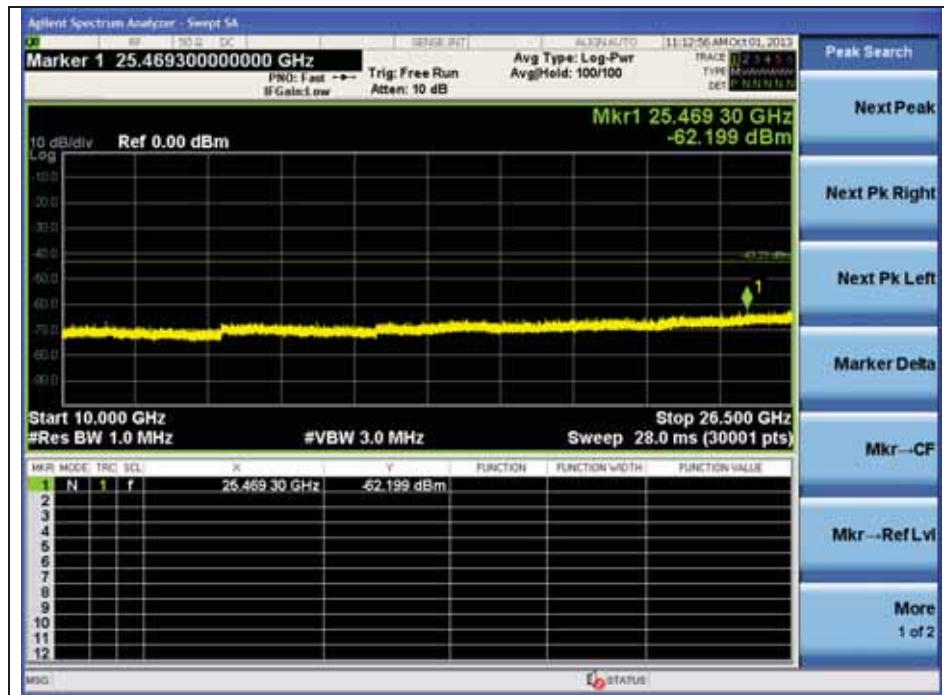

Note:

Offset (dB) = Attenuator (dB) + Cable loss (dB)

Result (dB m) = Spurious offset (dB) + Reading values (dB m)

Frequency (MHz)	offset (dB)	Reading values (dB m)	Result (dB m)
2 483.50	16.82	-71.59	-54.77
3 845.90	-	Noise level	-
25 469.30	-	Noise level	-

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


5.8 GHz

OFDM : 802.11a(6 Mbps)

Low Channel



The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

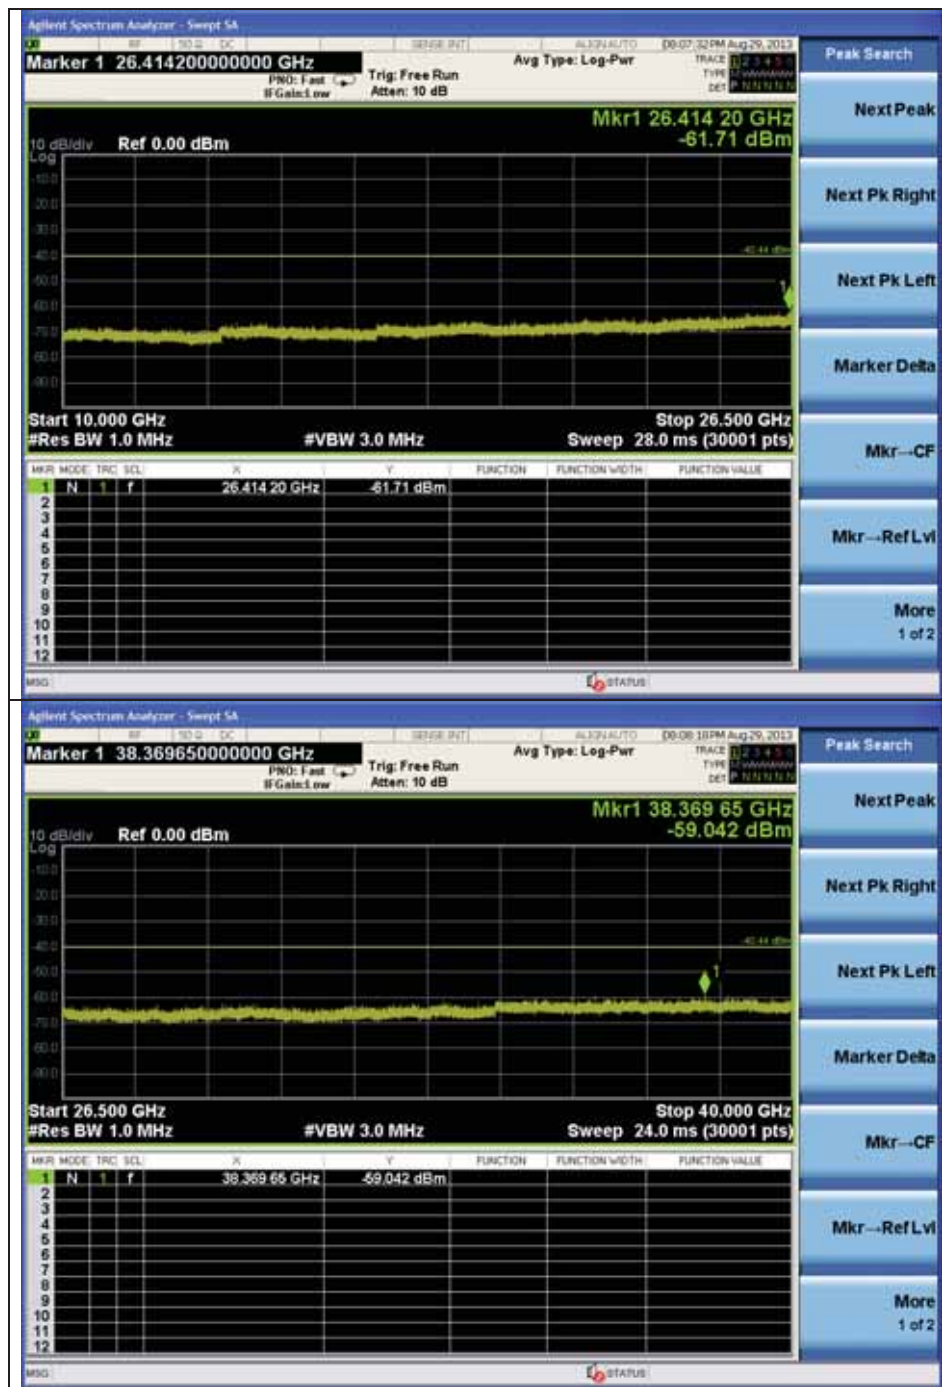

Note:

Offset (dB) = Attenuator (dB) + Cable loss (dB)

Result (dB m) = Spurious offset (dB) + Reading values (dB m)


Frequency (MHz)	offset (dB)	Reading values (dB m)	Result (dB m)
5 725.00	16.73	-71.56	-54.83
7 660.70	18.24	-64.96	-46.72
26 414.20	-	Noise level	-
38 369.65	-	Noise level	-

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Middle Channel



The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

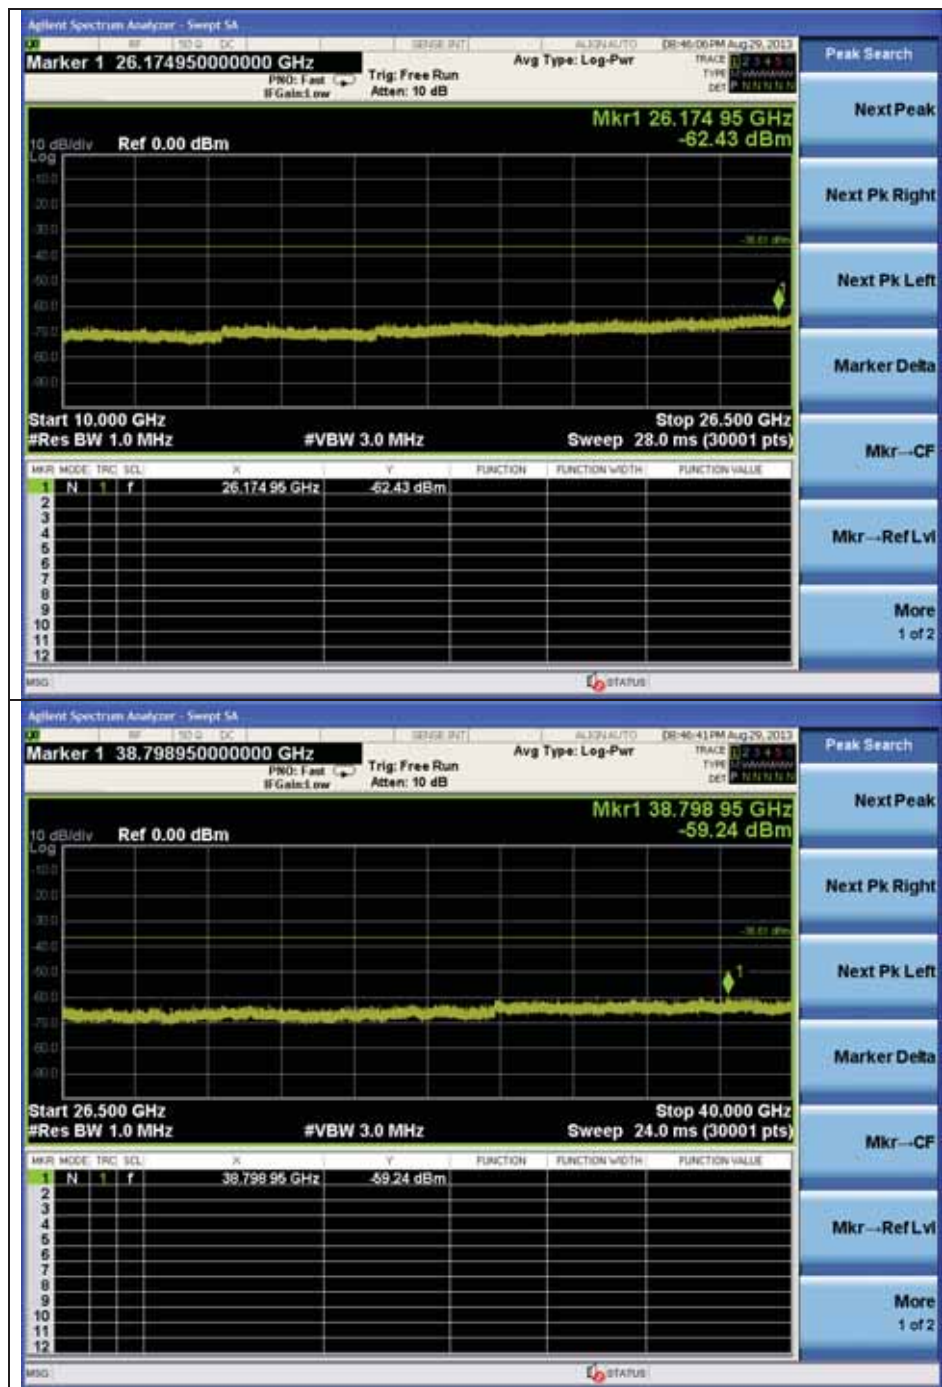

Note:

Offset (dB) = Attenuator (dB) + Cable loss (dB)

Result (dB m) = Spurious offset (dB) + Reading values (dB m)


Frequency (MHz)	offset (dB)	Reading values (dB m)	Result (dB m)
7 713.90	18.31	-65.94	-47.63
26 174.95	-	Noise level	-
38 798.95	-	Noise level	-

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

High Channel



The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

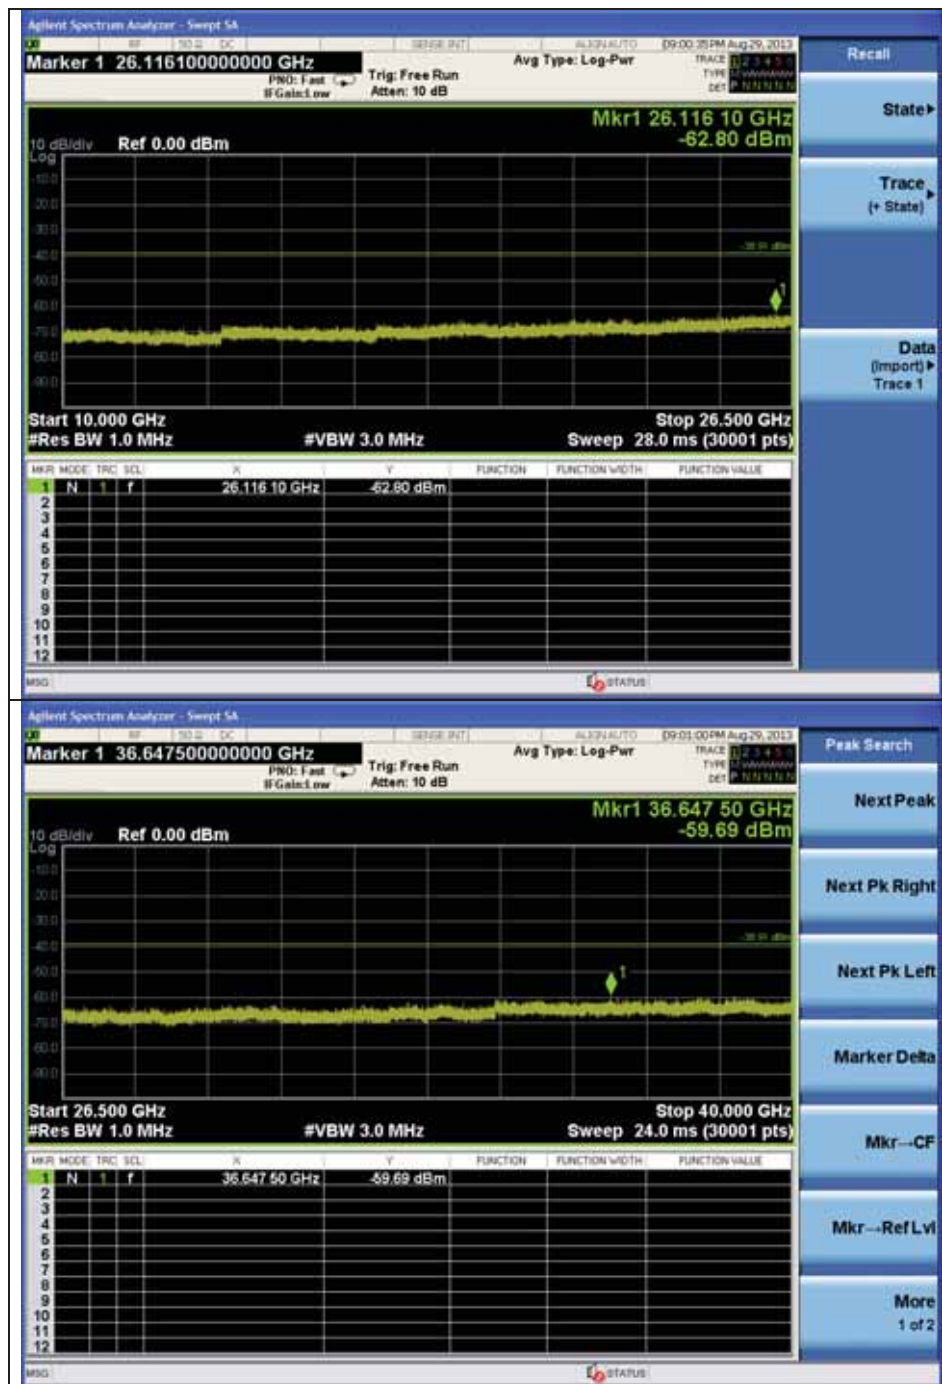

Note:

Offset (dB) = Attenuator (dB) + Cable loss (dB)

Result (dB m) = Spurious offset (dB) + Reading values (dB m)

Frequency (MHz)	offset (dB)	Reading values (dB m)	Result (dB m)
3 778.70	-	Noise level	-
5 850.00	16.96	-74.95	-57.99
26 116.10	-	Noise level	-
36 647.50	-	Noise level	-


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

OFDM : 802.11n_HT20(MCS8)

Low Channel



The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

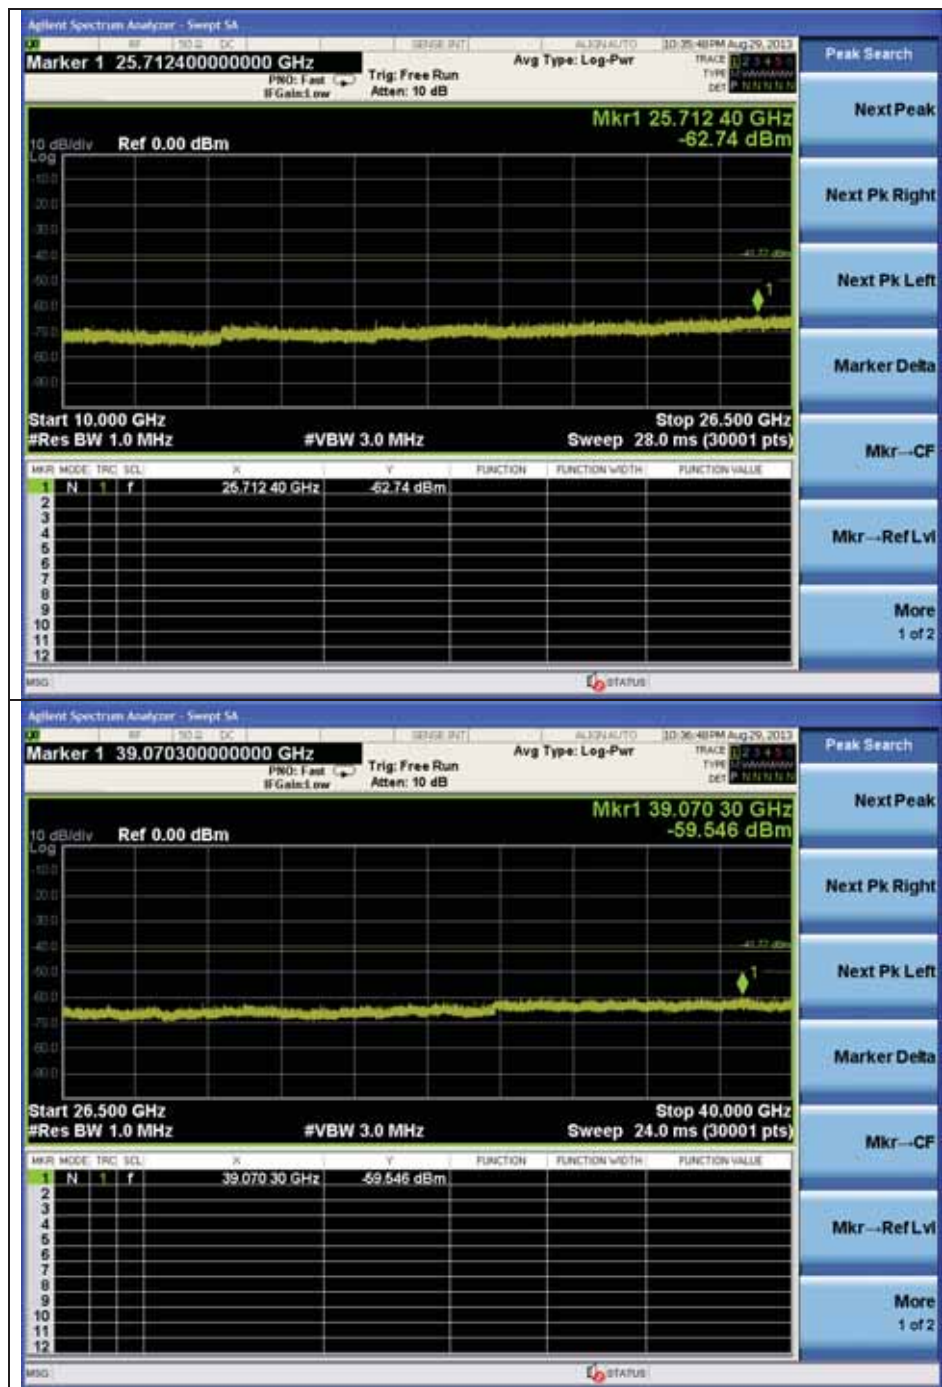

Note:


Offset (dB) = Attenuator (dB) + Cable loss (dB)

Result (dB m) = Spurious offset (dB) + Reading values (dB m)


Frequency (MHz)	offset (dB)	Reading values (dB m)	Result (dB m)
5 725.00	16.73	-62.77	-46.04
7 660.70	18.24	-63.23	-44.99
25 712.40	-	Noise level	-
39 070.30	-	Noise level	-

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Middle Channel

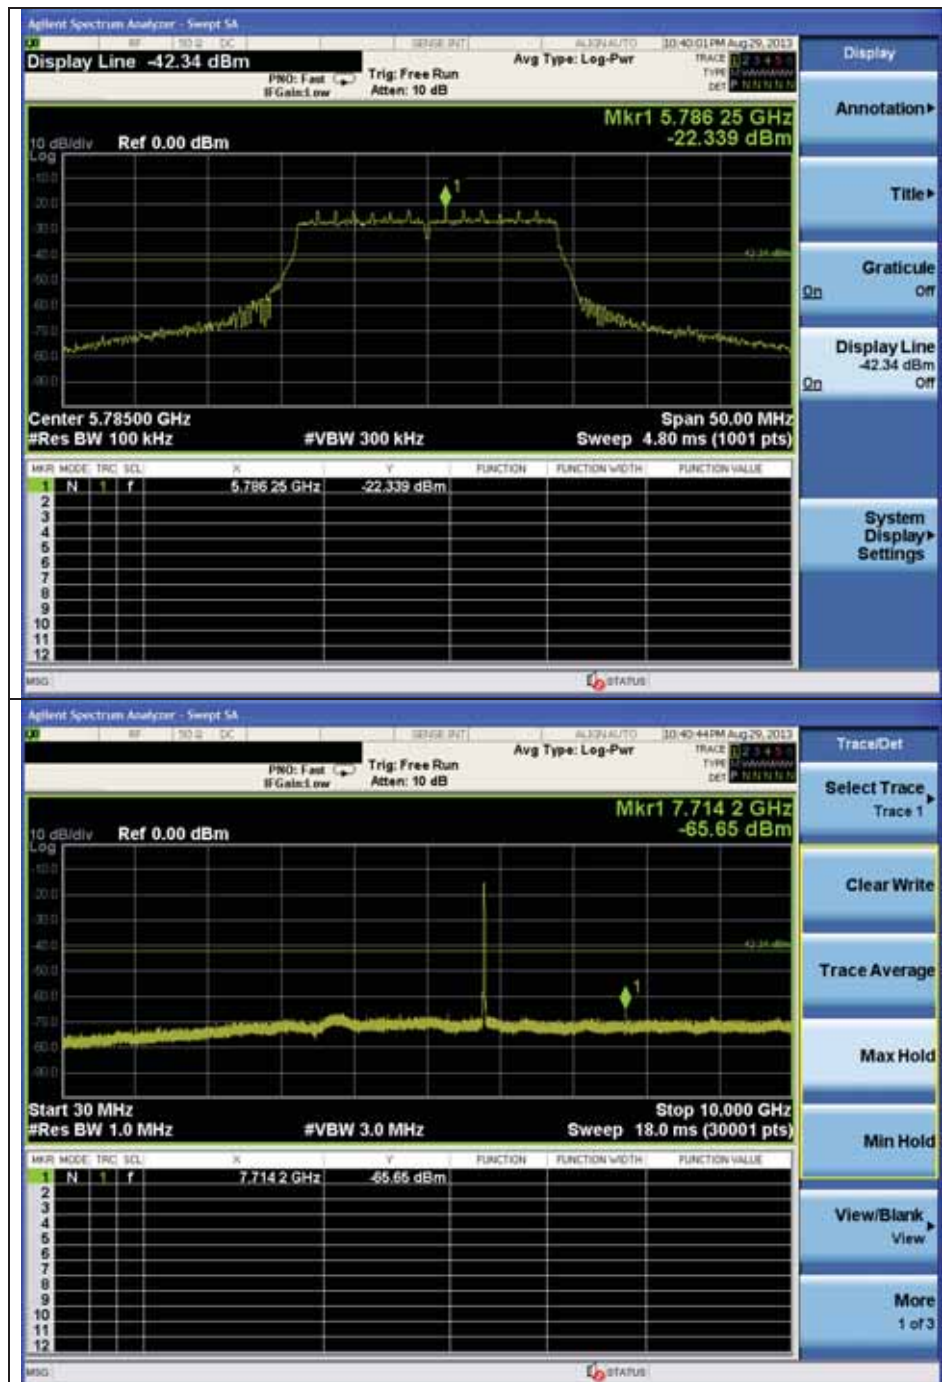

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

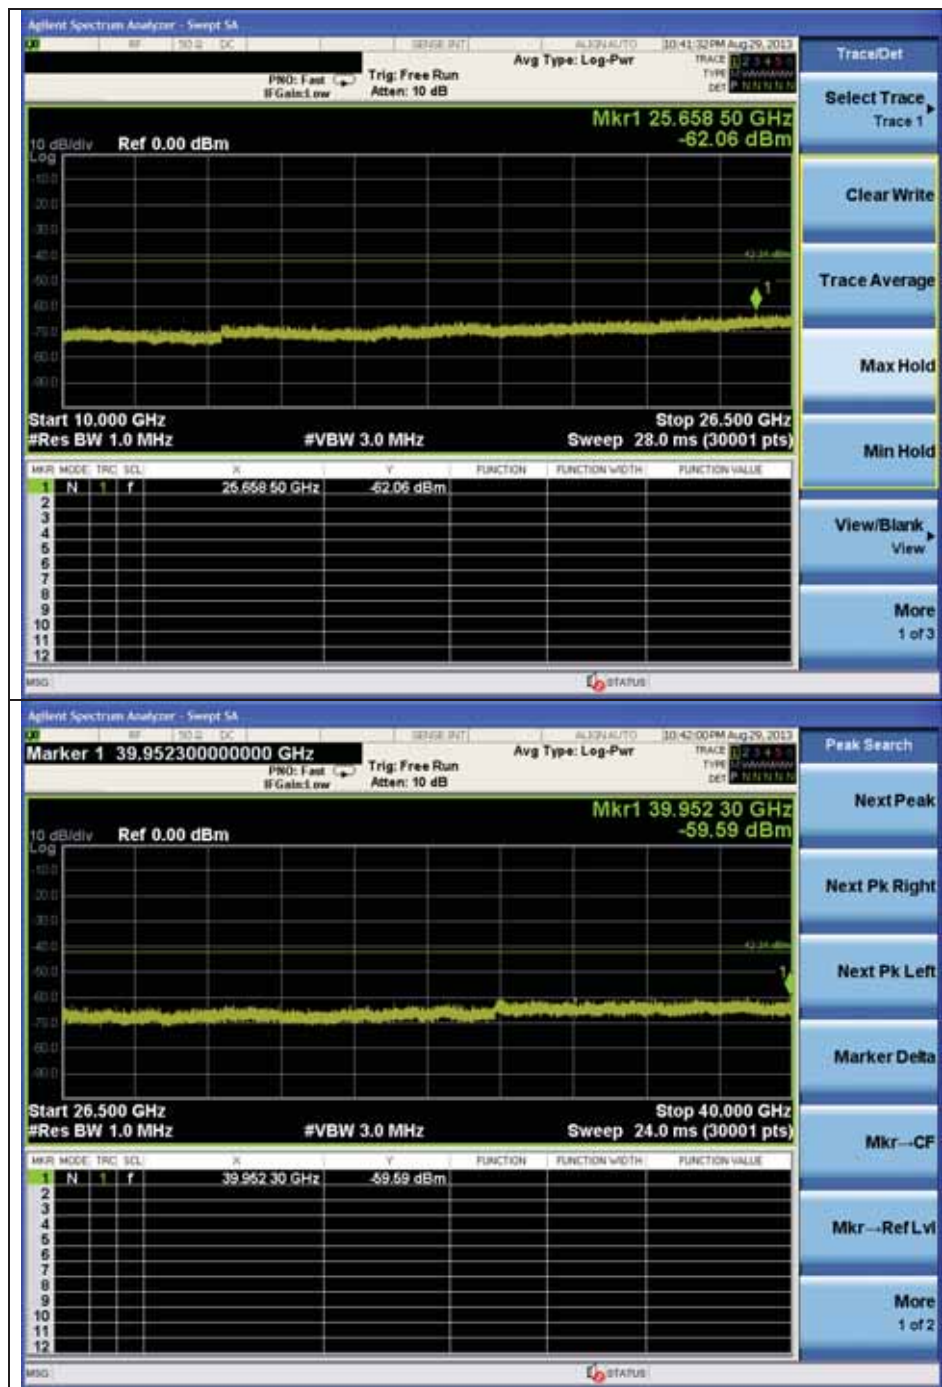

Note:

Offset (dB) = Attenuator (dB) + Cable loss (dB)

Result (dB m) = Spurious offset (dB) + Reading values (dB m)


Frequency (MHz)	offset (dB)	Reading values (dB m)	Result (dB m)
7 714.20	18.31	-65.65	-47.34
25 658.50	-	Noise level	-
39 952.30	-	Noise level	-

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

High Channel



The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

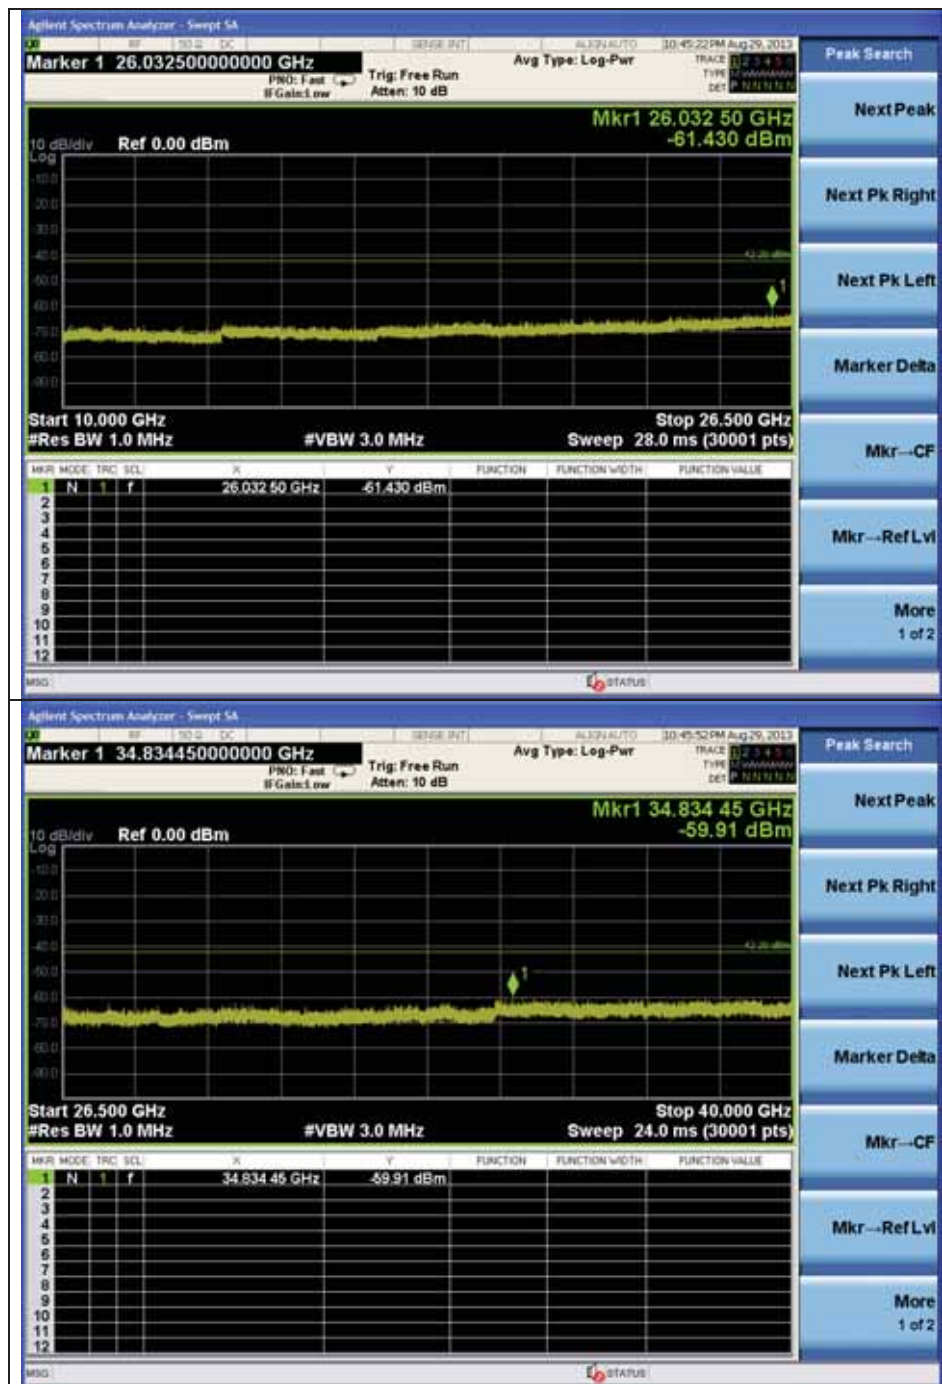

Note:

Offset (dB) = Attenuator (dB) + Cable loss (dB)


Result (dB m) = Spurious offset (dB) + Reading values (dB m)

Frequency (MHz)	offset (dB)	Reading values (dB m)	Result (dB m)
5 850.00	16.96	-78.45	-61.49
7 767.40	18.35	-65.57	-47.22
26 032.50	-	Noise level	-
34 834.45	-	Noise level	-


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

OFDM : 802.11n_HT40(MCS8)

Low Channel

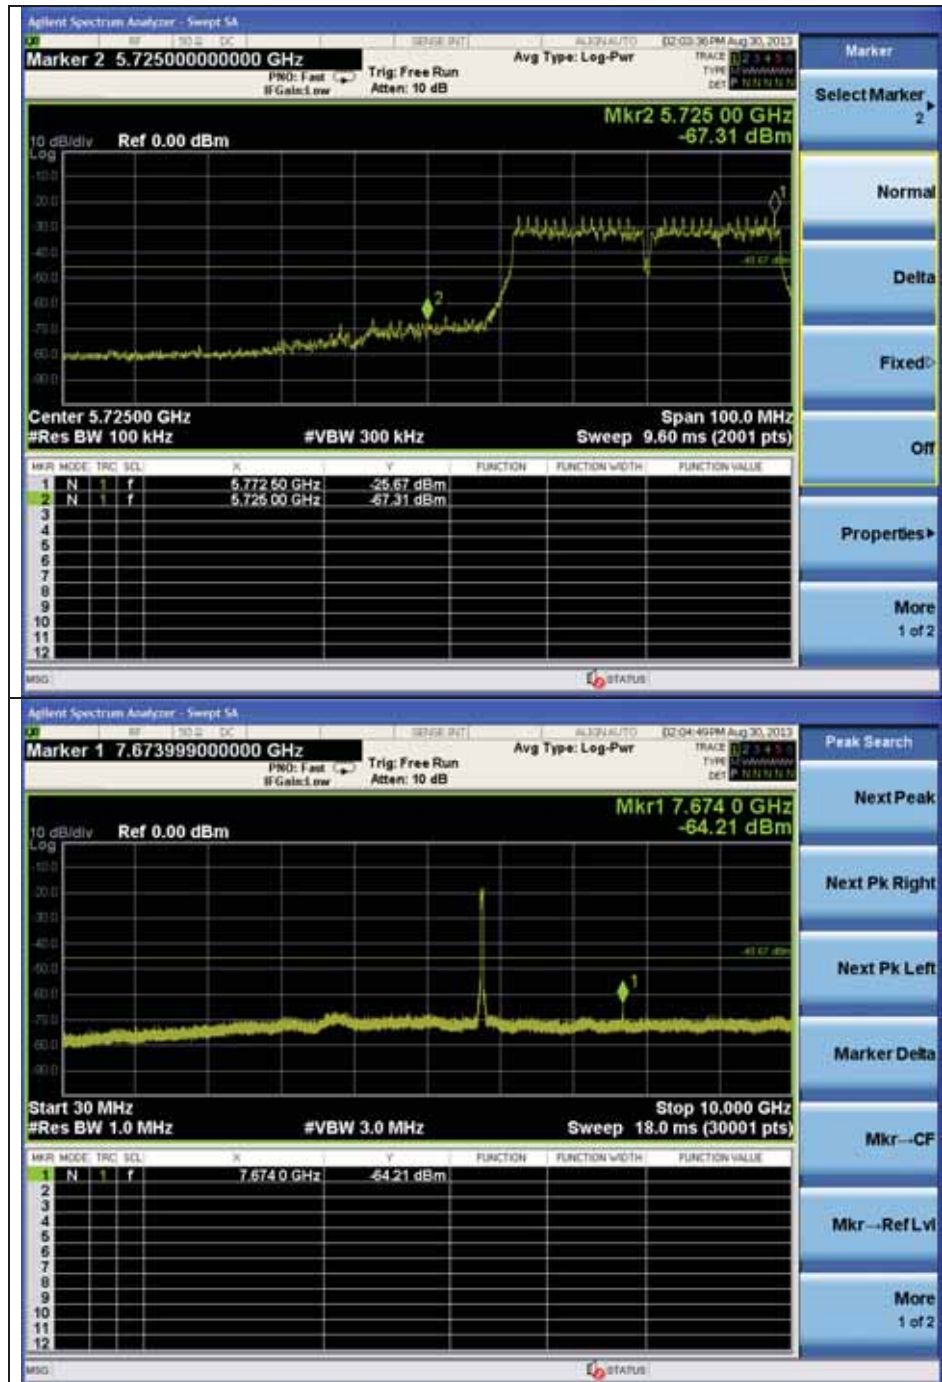

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

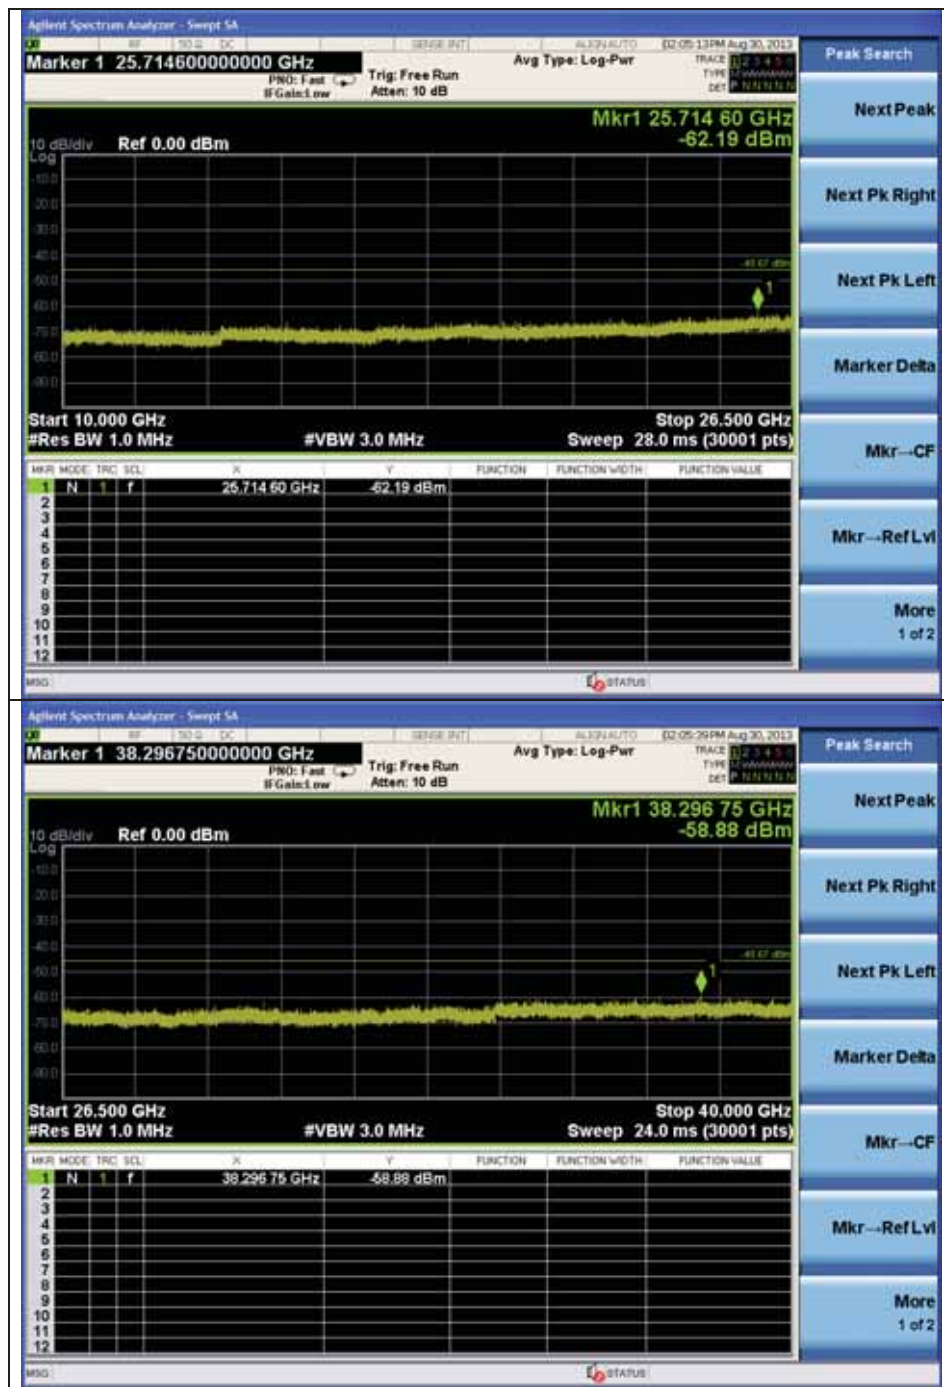

Note:


Offset (dB) = Attenuator (dB) + Cable loss (dB)

Result (dB m) = Spurious offset (dB) + Reading values (dB m)


Frequency (MHz)	offset (dB)	Reading values (dB m)	Result (dB m)
5 725.00	16.73	-67.31	-50.58
7 674.00	18.29	-64.21	-45.92
25 714.60	-	Noise level	-
38 296.75	-	Noise level	-

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

High Channel

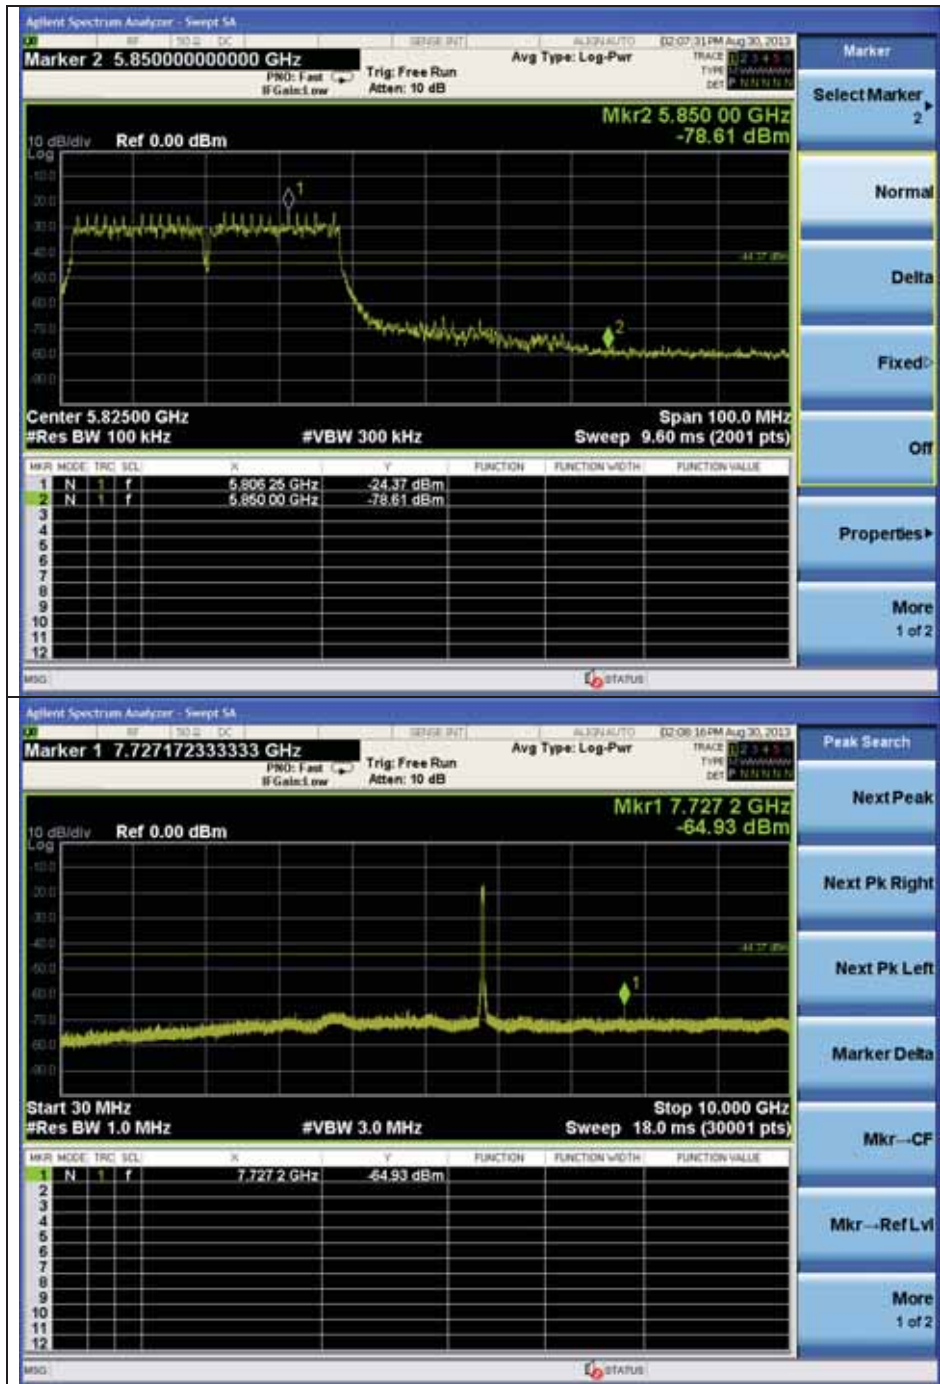

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

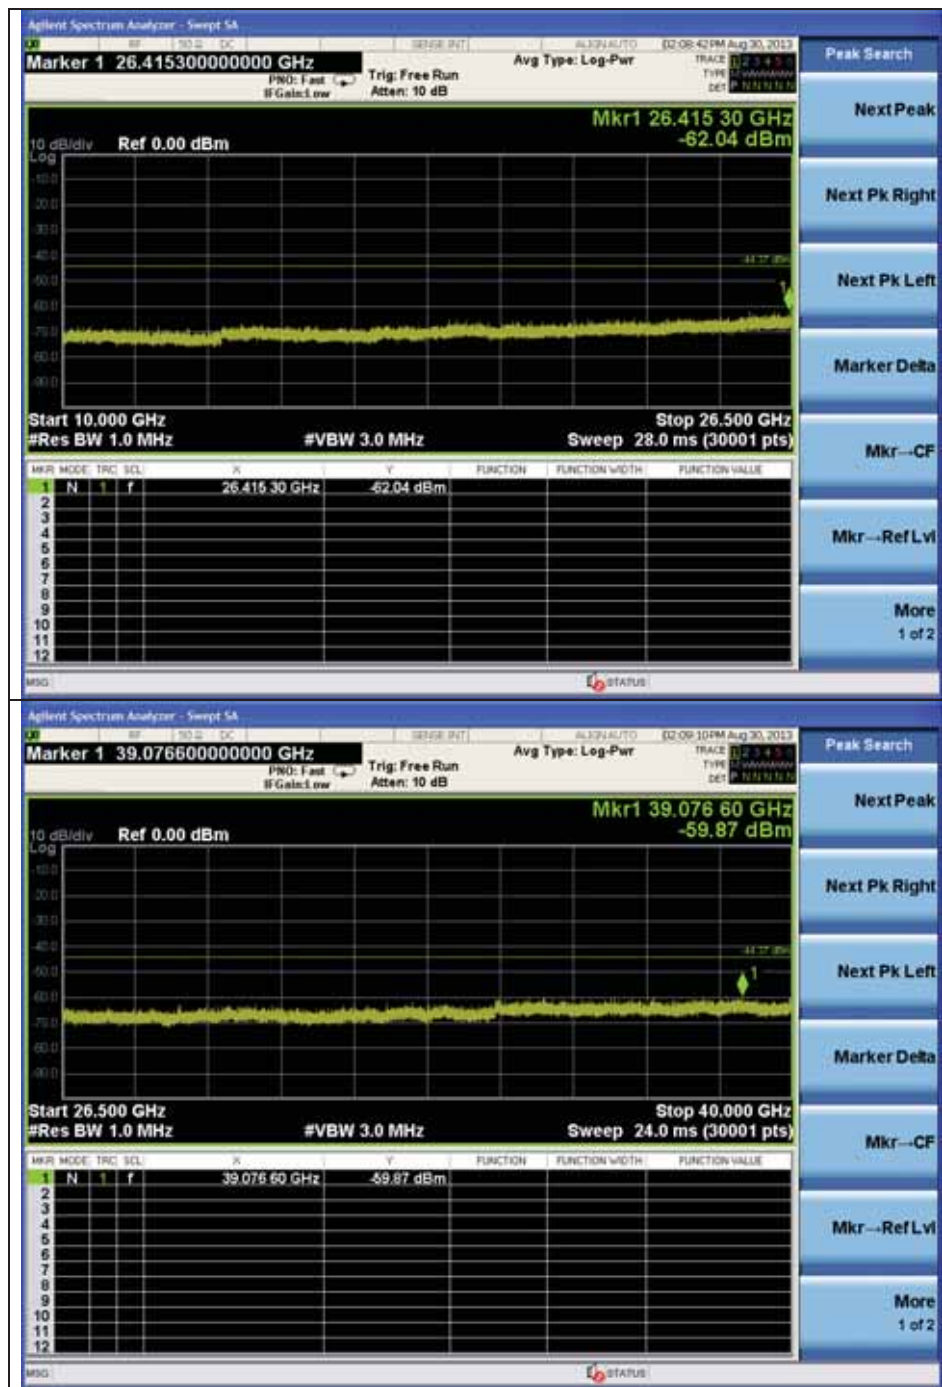

Note:

Offset (dB) = Attenuator (dB) + Cable loss (dB)

Result (dB m) = Spurious offset (dB) + Reading values (dB m)


Frequency (MHz)	offset (dB)	Reading values (dB m)	Result (dB m)
5 850.00	16.96	-78.61	-61.65
7 727.20	18.31	-64.93	-46.62
26 415.30	-	Noise level	-
39 076.60	-	Noise level	-

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


ANT1

OFDM : 802.11n_HT20(MCS0)

Low Channel

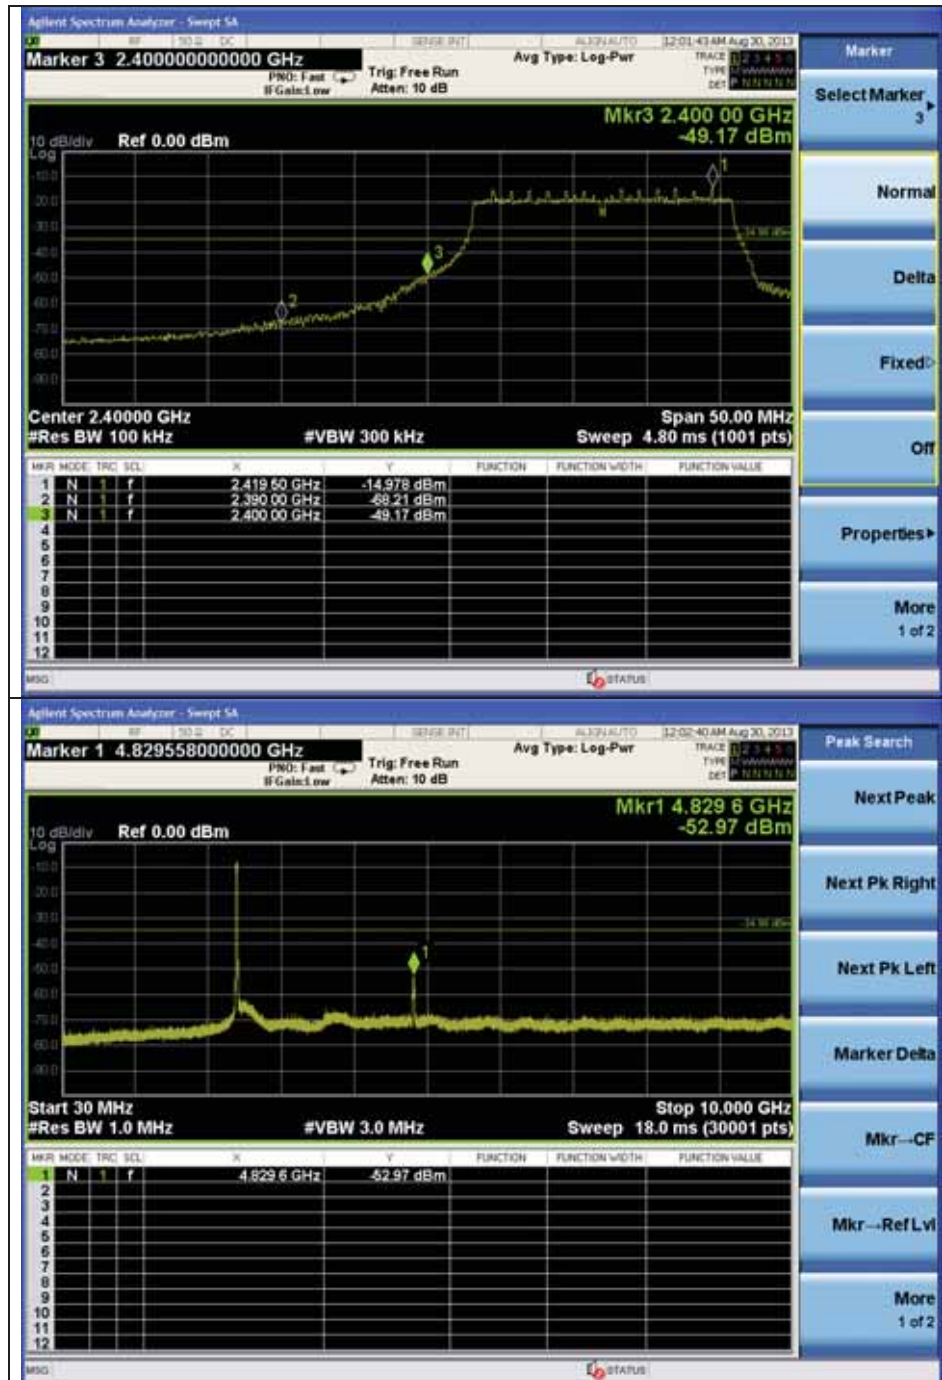

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

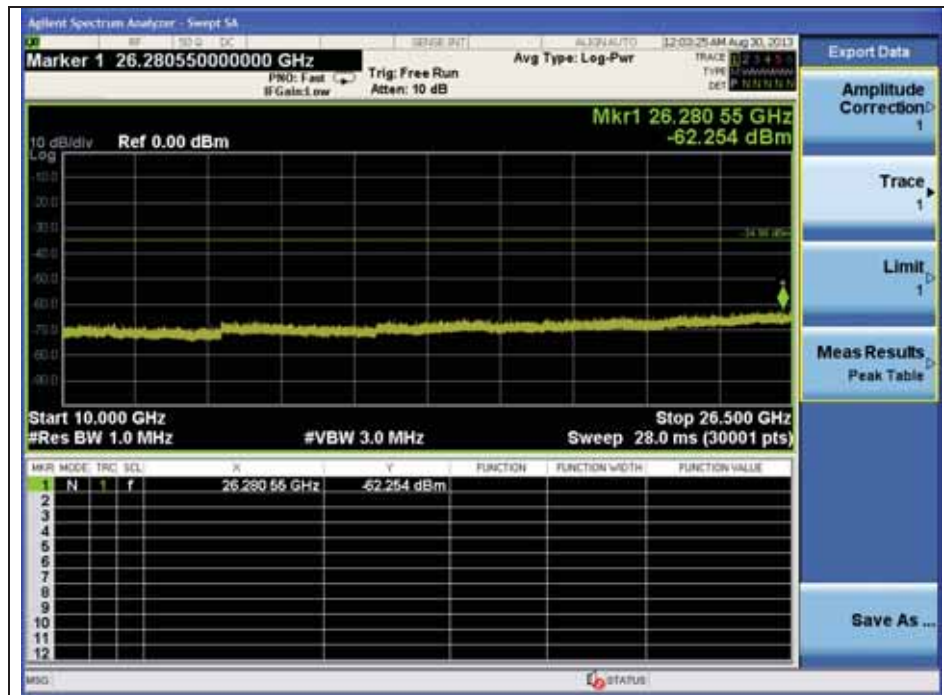

Note:

Offset (dB) = Attenuator (dB) + Cable loss (dB)

Result (dB m) = Spurious offset (dB) + Reading values (dB m)


Frequency (MHz)	offset (dB)	Reading values (dB m)	Result (dB m)
2 390.00	16.74	-68.21	-51.47
2 400.00	16.78	-49.17	-32.39
4 829.60	17.86	-52.97	-35.11
26 280.55	-	Noise level	-

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Middle Channel



The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

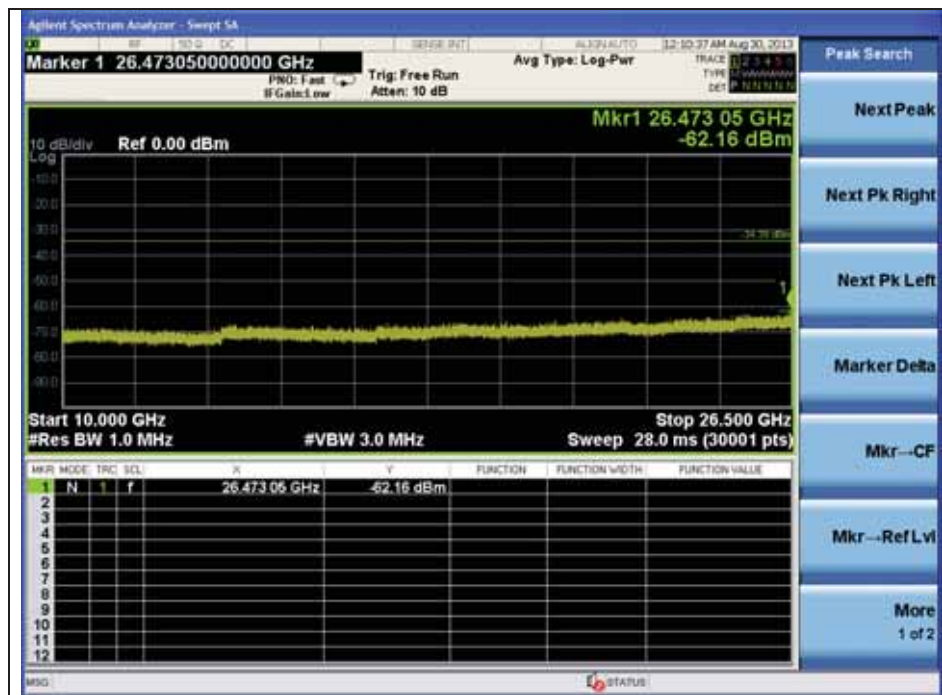

Note:


Offset (dB) = Attenuator (dB) + Cable loss (dB)

Result (dB m) = Spurious offset (dB) + Reading values (dB m)


Frequency (MHz)	offset (dB)	Reading values (dB m)	Result (dB m)
4 867.80	17.90	-54.12	-36.22
26 473.05	-	Noise level	-

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

High Channel

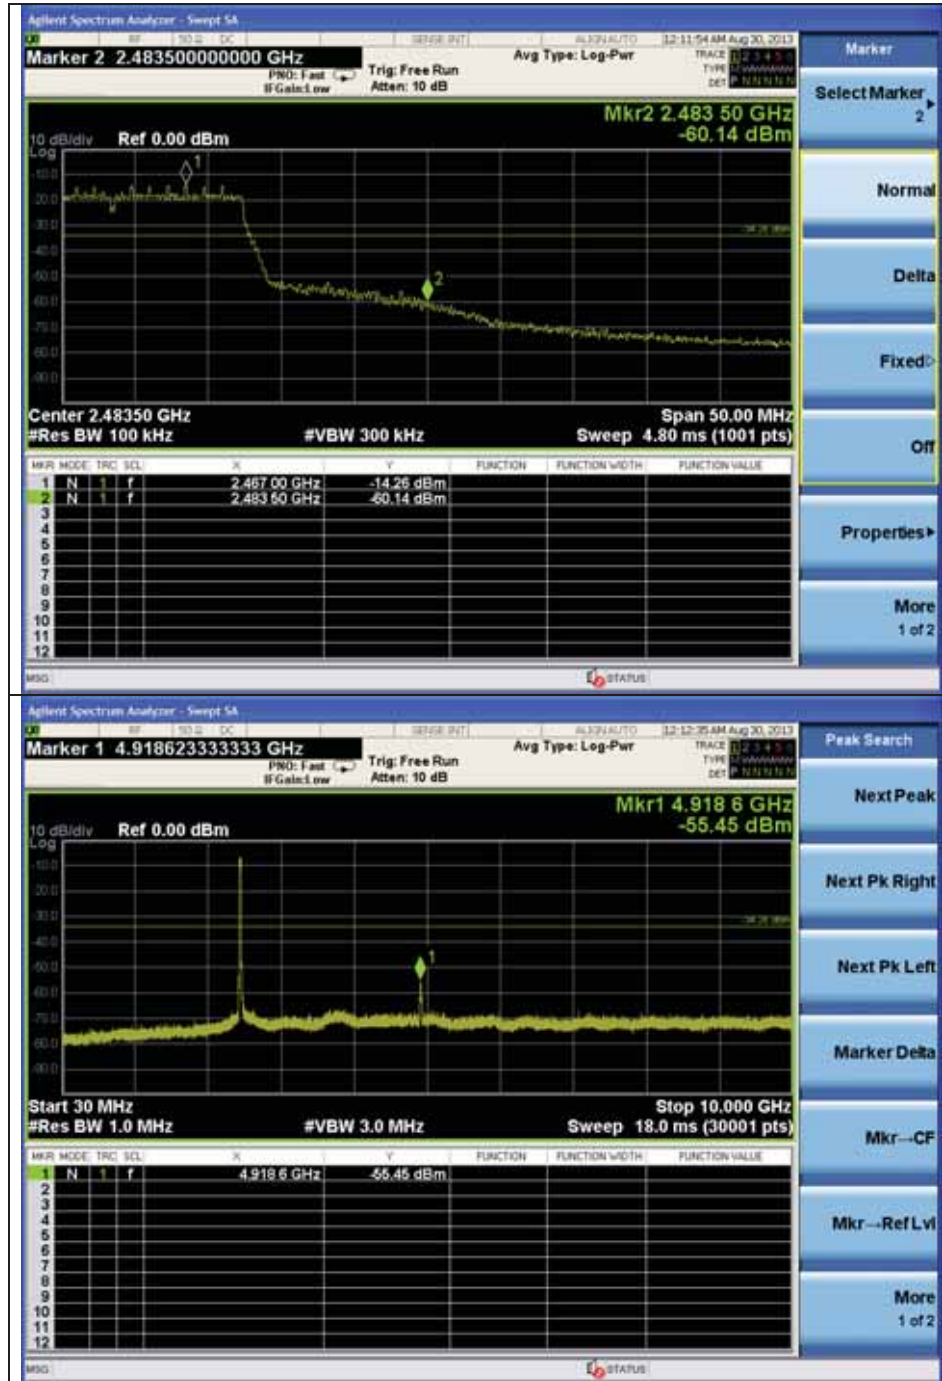

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

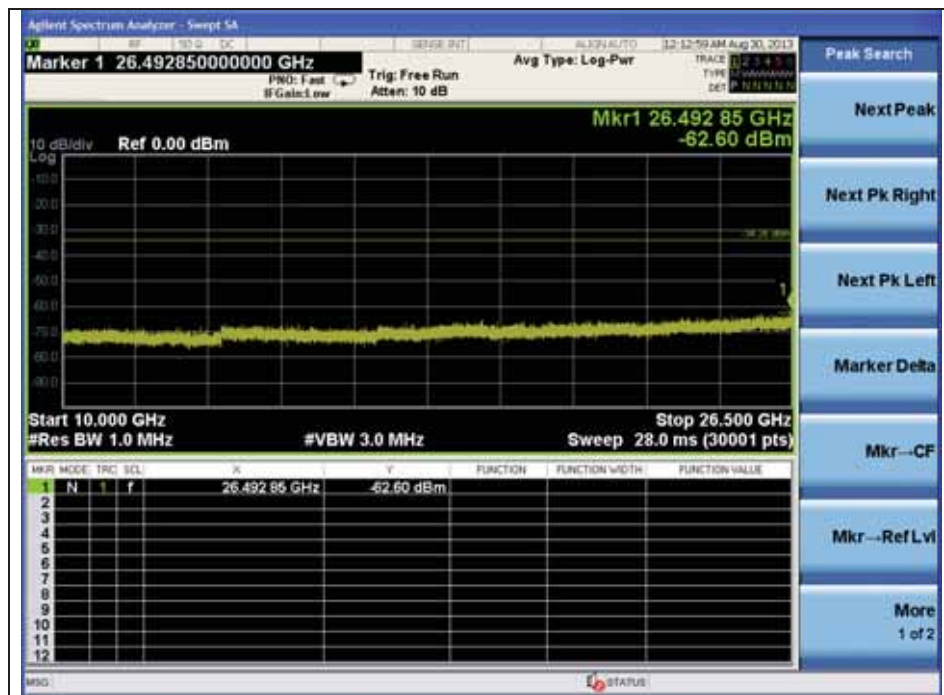

Note:


Offset (dB) = Attenuator (dB) + Cable loss (dB)

Result (dB m) = Spurious offset (dB) + Reading values (dB m)


Frequency (MHz)	offset (dB)	Reading values (dB m)	Result (dB m)
2 483.50	16.82	-60.14	-43.32
4 918.60	17.88	-55.45	-37.57
26 492.85	-	Noise level	-

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

OFDM : 802.11n_HT40(MCS8) Low Channel

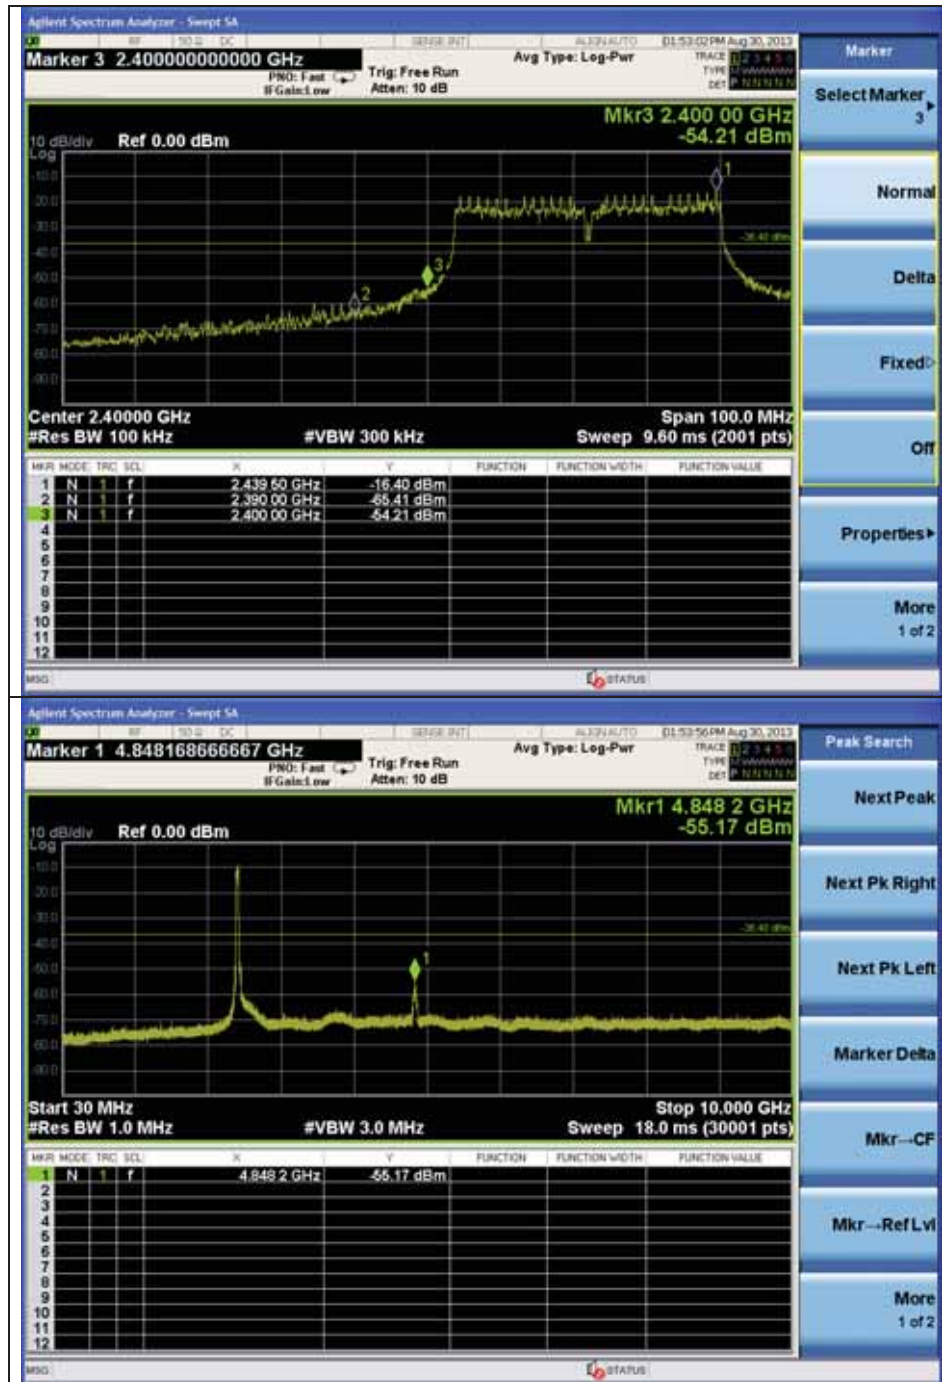

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

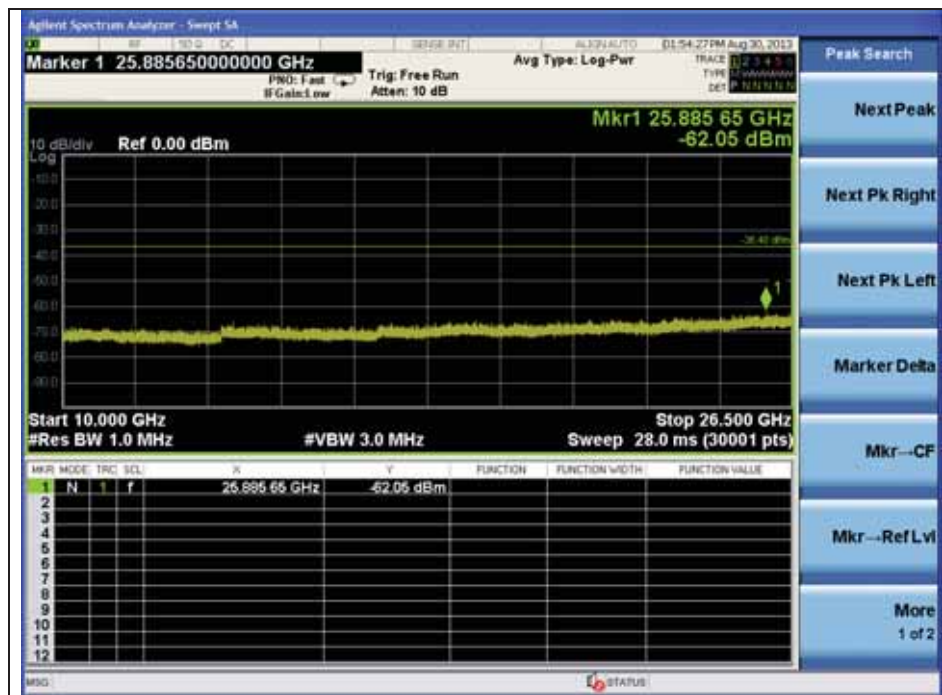

Note:


Offset (dB) = Attenuator (dB) + Cable loss (dB)

Result (dB m) = Spurious offset (dB) + Reading values (dB m)


Frequency (MHz)	offset (dB)	Reading values (dB m)	Result (dB m)
2 390.00	16.74	-65.41	-48.67
2 400.00	16.78	-54.21	-37.43
4 848.20	17.89	-55.17	-37.28
25 885.65	-	Noise level	-

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Middle Channel

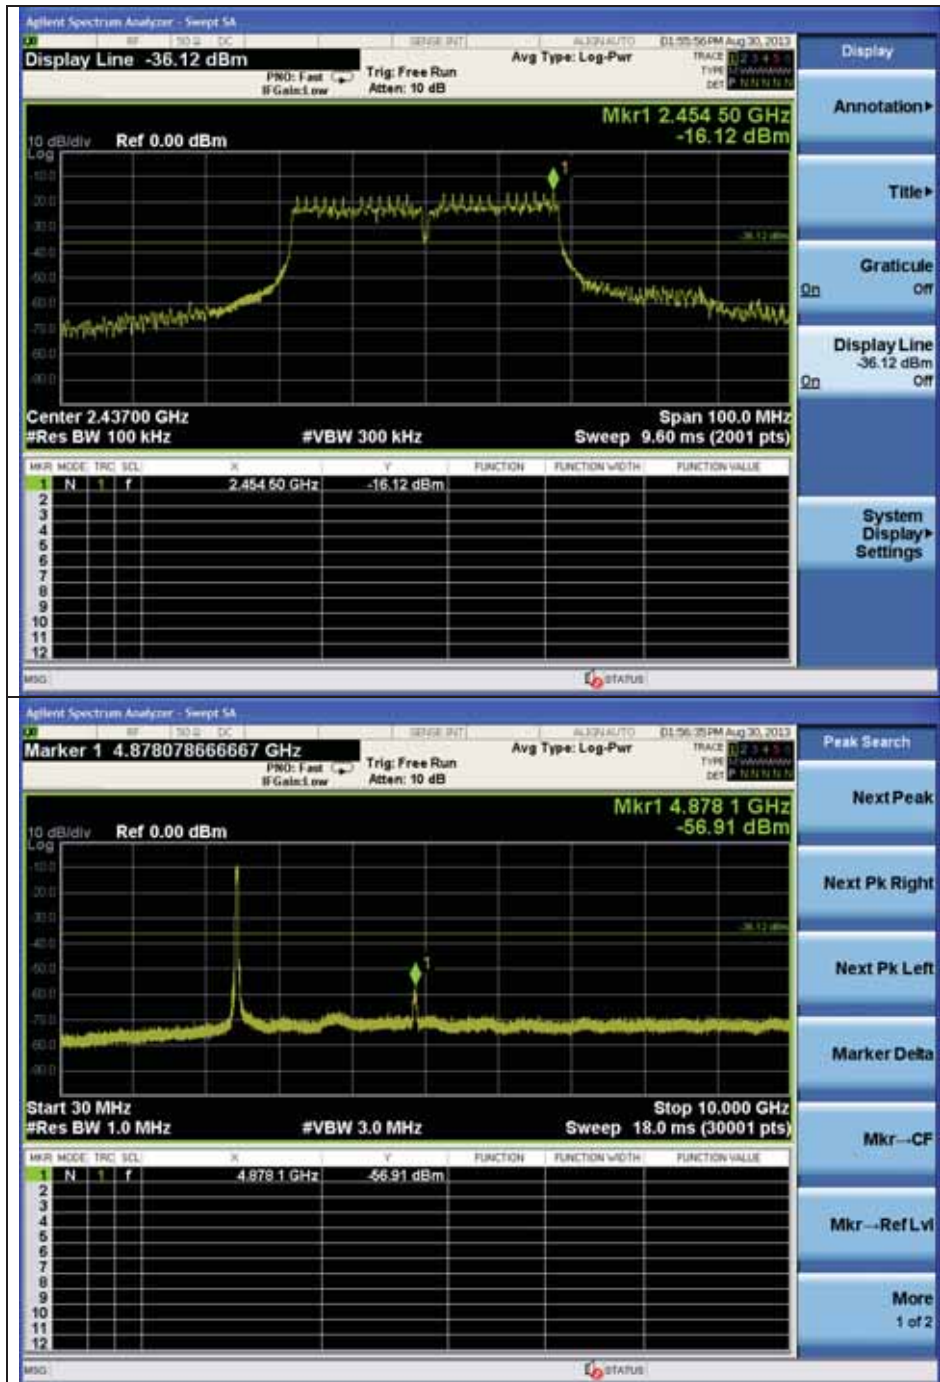

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

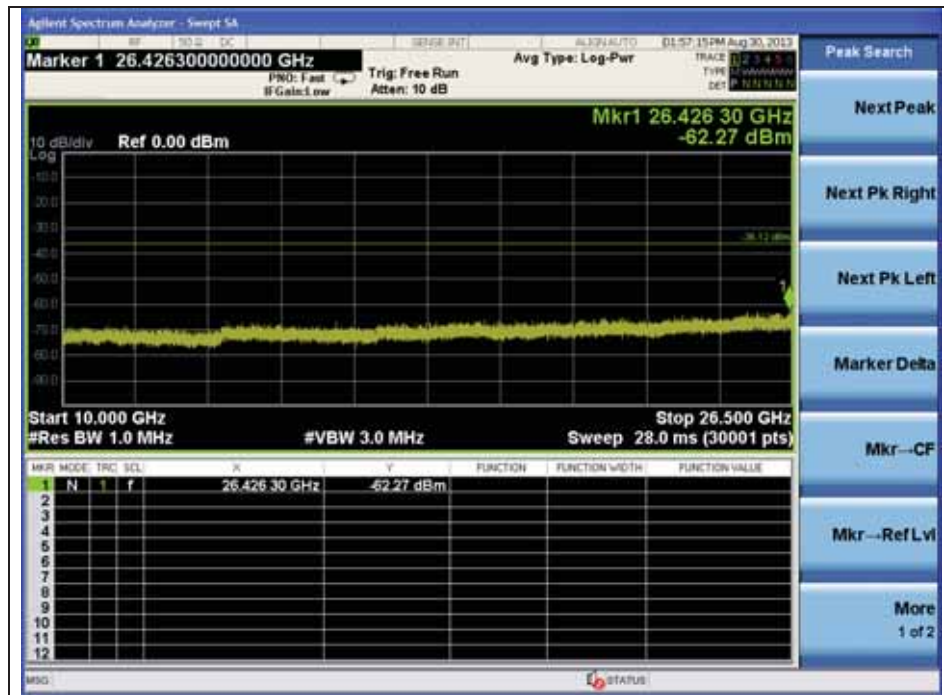

Note:


Offset (dB) = Attenuator (dB) + Cable loss (dB)

Result (dB m) = Spurious offset (dB) + Reading values (dB m)


Frequency (MHz)	offset (dB)	Reading values (dB m)	Result (dB m)
4 878.10	17.93	-56.91	-38.98
26 426.30	-	Noise level	-

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

High Channel

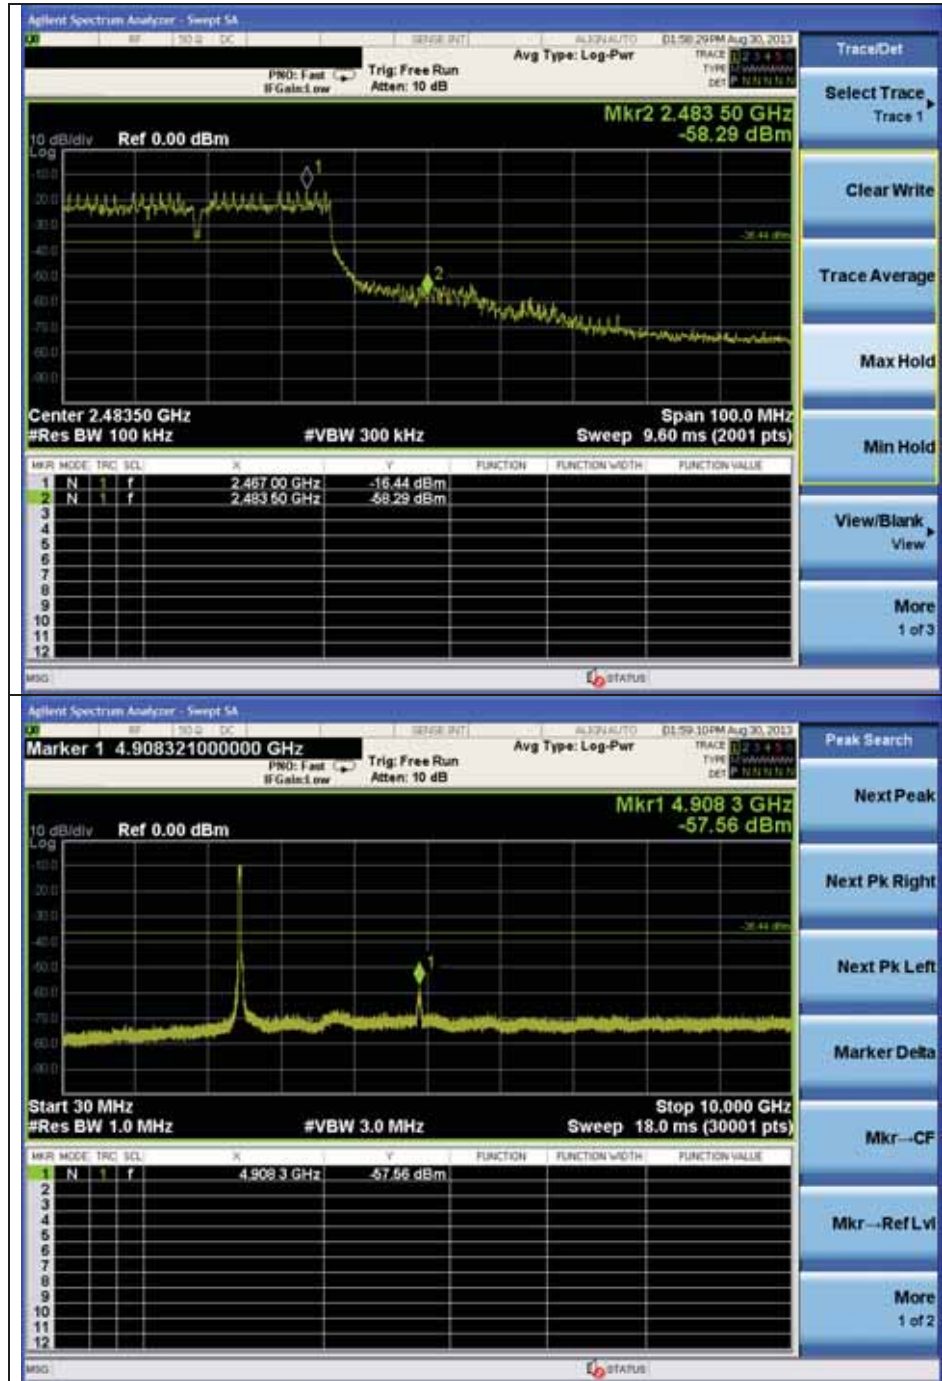

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

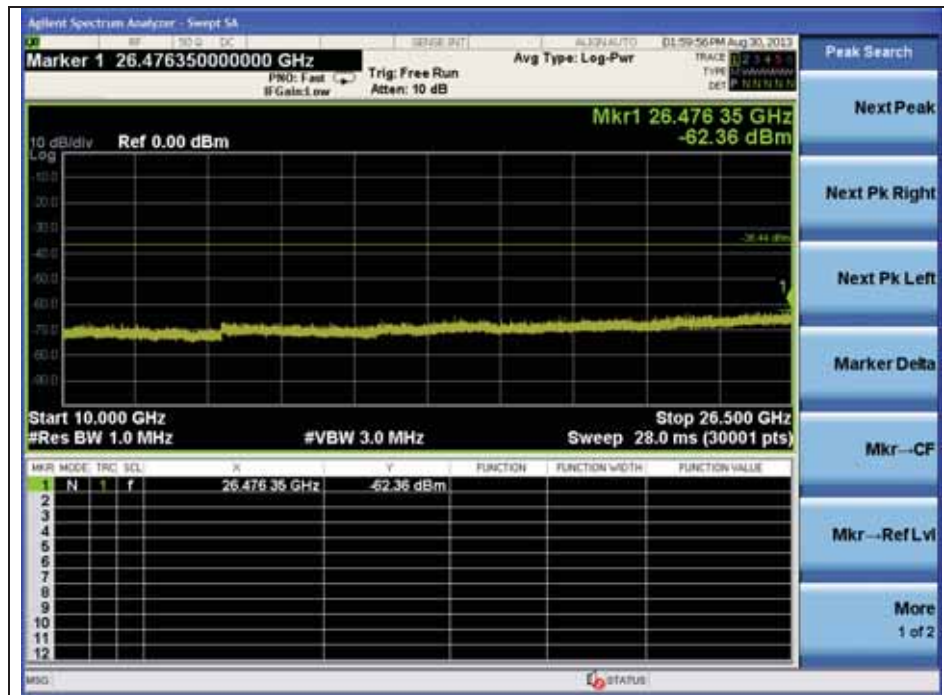

Note:

Offset (dB) = Attenuator (dB) + Cable loss (dB)

Result (dB m) = Spurious offset (dB) + Reading values (dB m)


Frequency (MHz)	offset (dB)	Reading values (dB m)	Result (dB m)
2 483.50	16.82	-58.29	-41.47
4 908.30	17.88	-57.56	-39.68
26 476.35	-	Noise level	-

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


5.8 GHz

OFDM : 802.11n_HT20(MCS8)

Low Channel

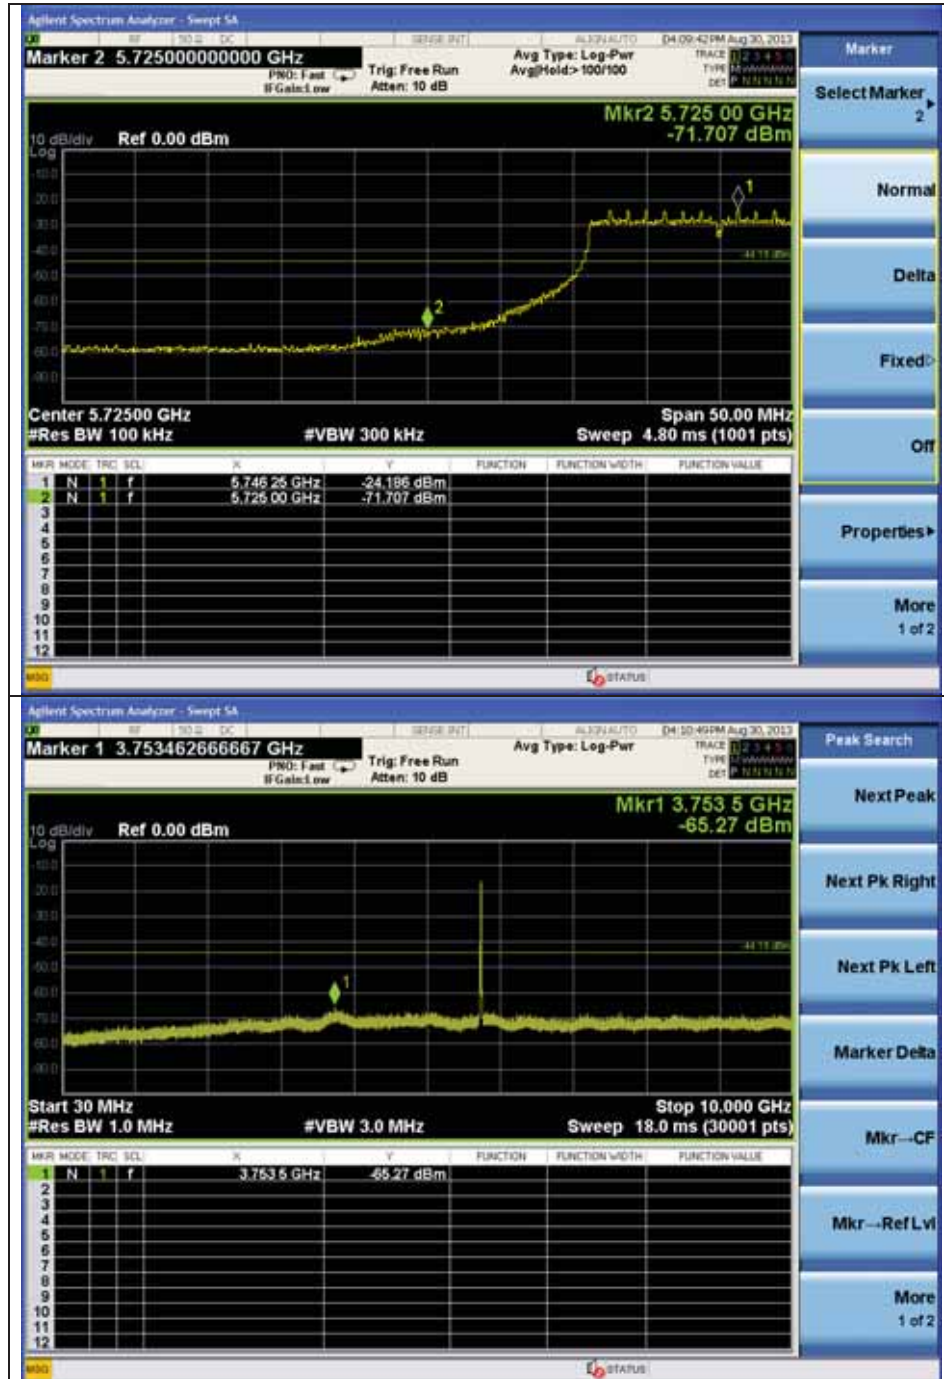

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

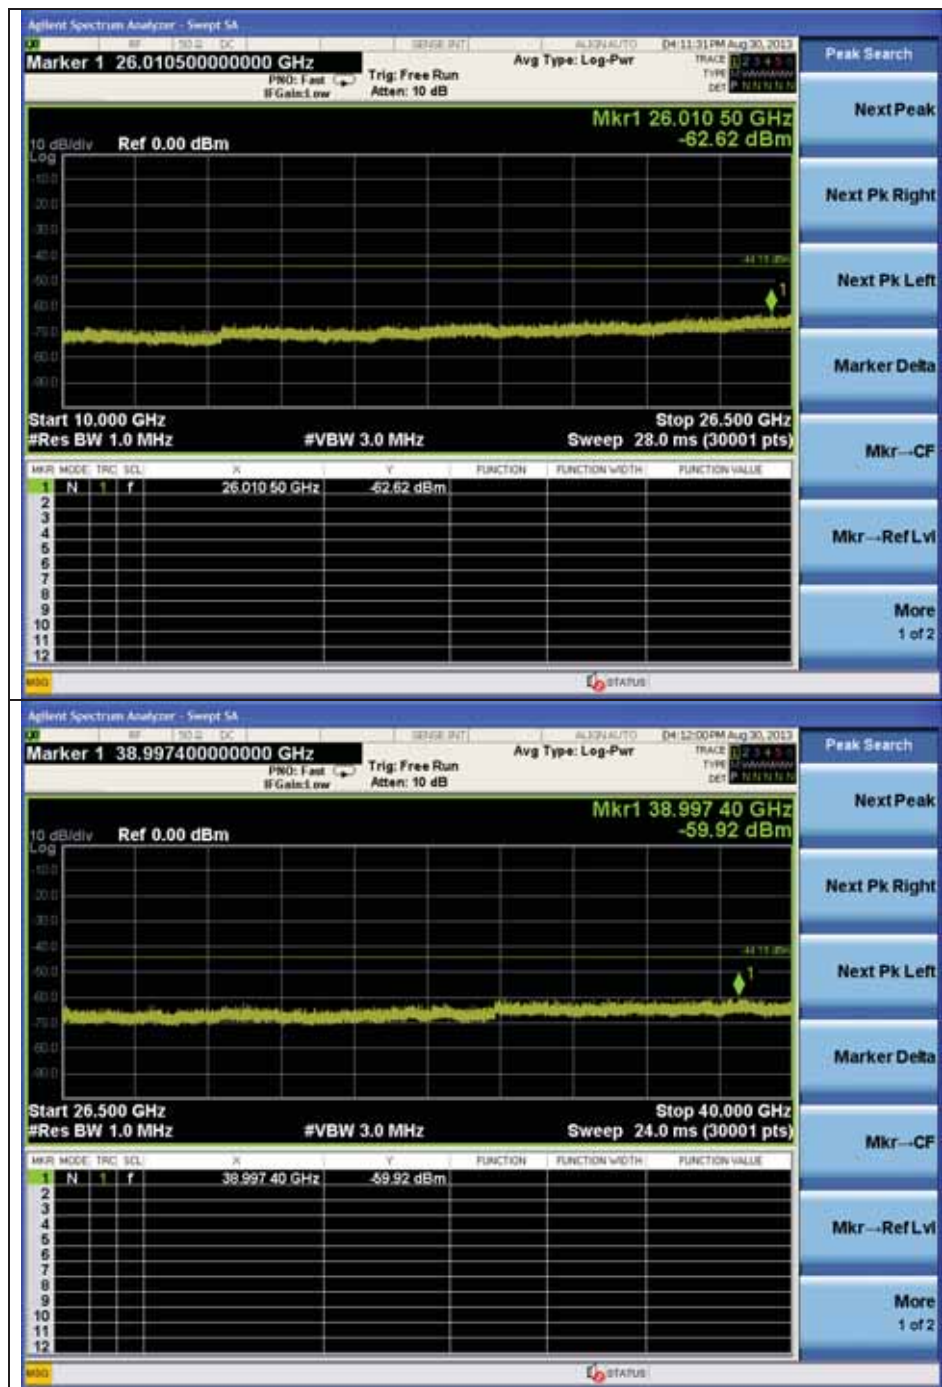

Note:


Offset (dB) = Attenuator (dB) + Cable loss (dB)

Result (dB m) = Spurious offset (dB) + Reading values (dB m)


Frequency (MHz)	offset (dB)	Reading values (dB m)	Result (dB m)
3 753.50	-	Noise level	-
5 725.00	16.73	-71.71	-55.98
26 010.50	-	Noise level	-
38 997.40	-	Noise level	-

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Middle Channel

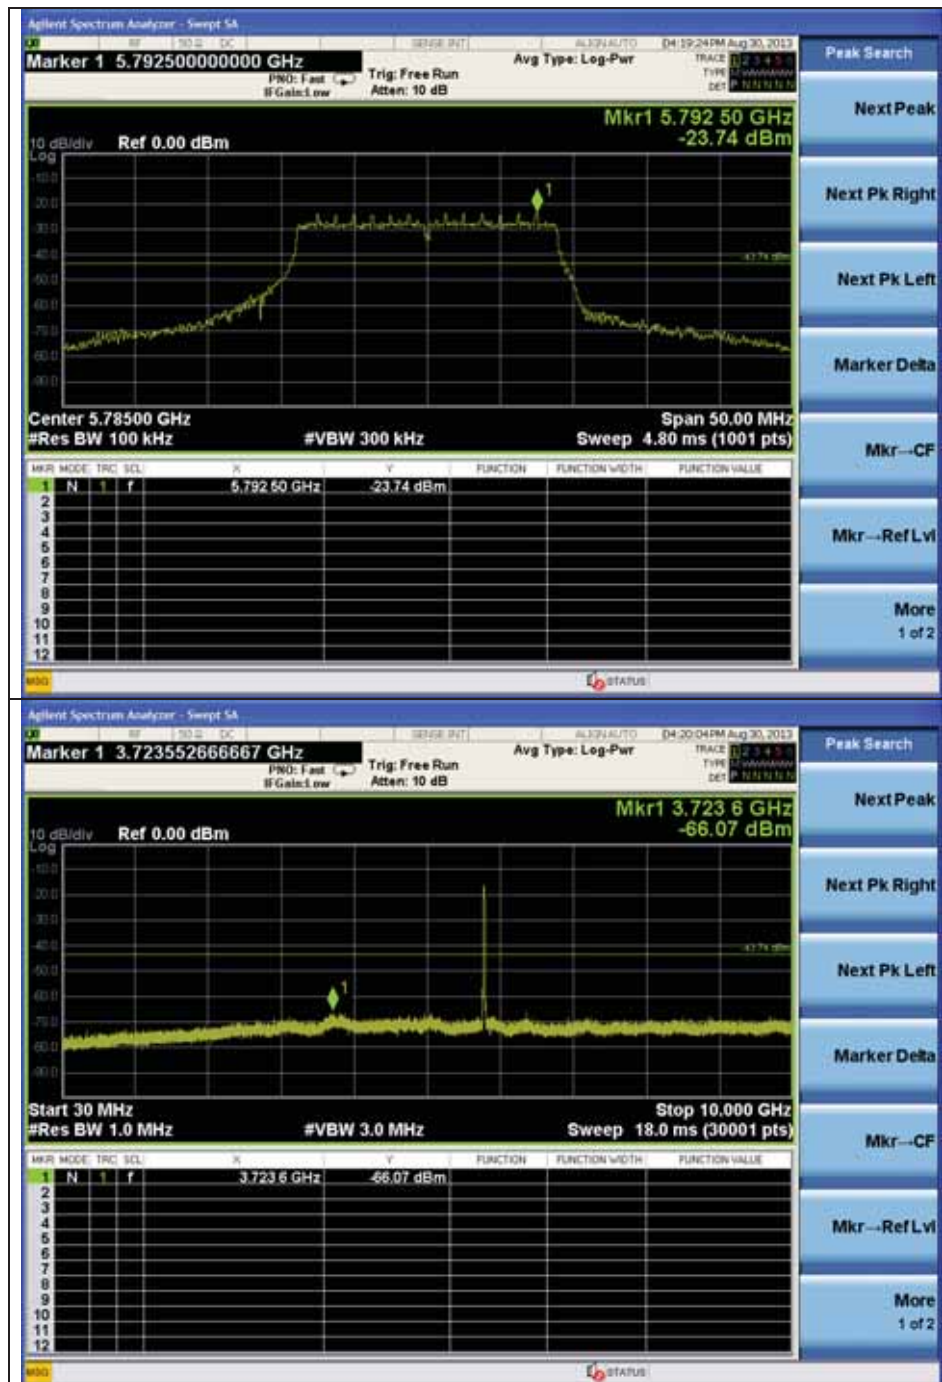

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

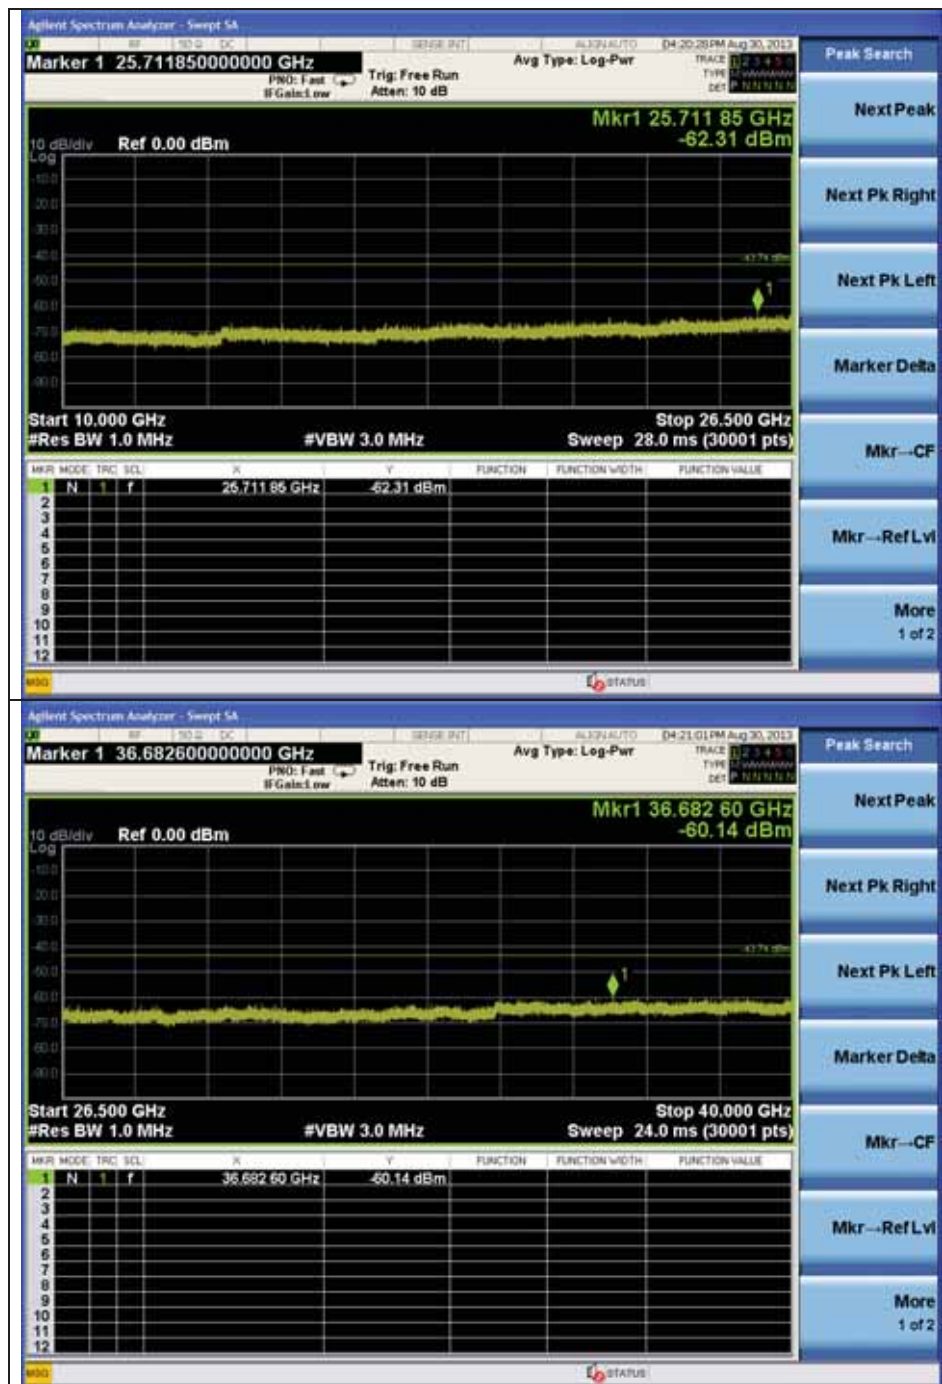

Note:


Offset (dB) = Attenuator (dB) + Cable loss (dB)

Result (dB m) = Spurious offset (dB) + Reading values (dB m)


Frequency (MHz)	offset (dB)	Reading values (dB m)	Result (dB m)
3 723.60	-	Noise level	-
25 711.85	-	Noise level	-
36 682.60	-	Noise level	-

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

High Channel

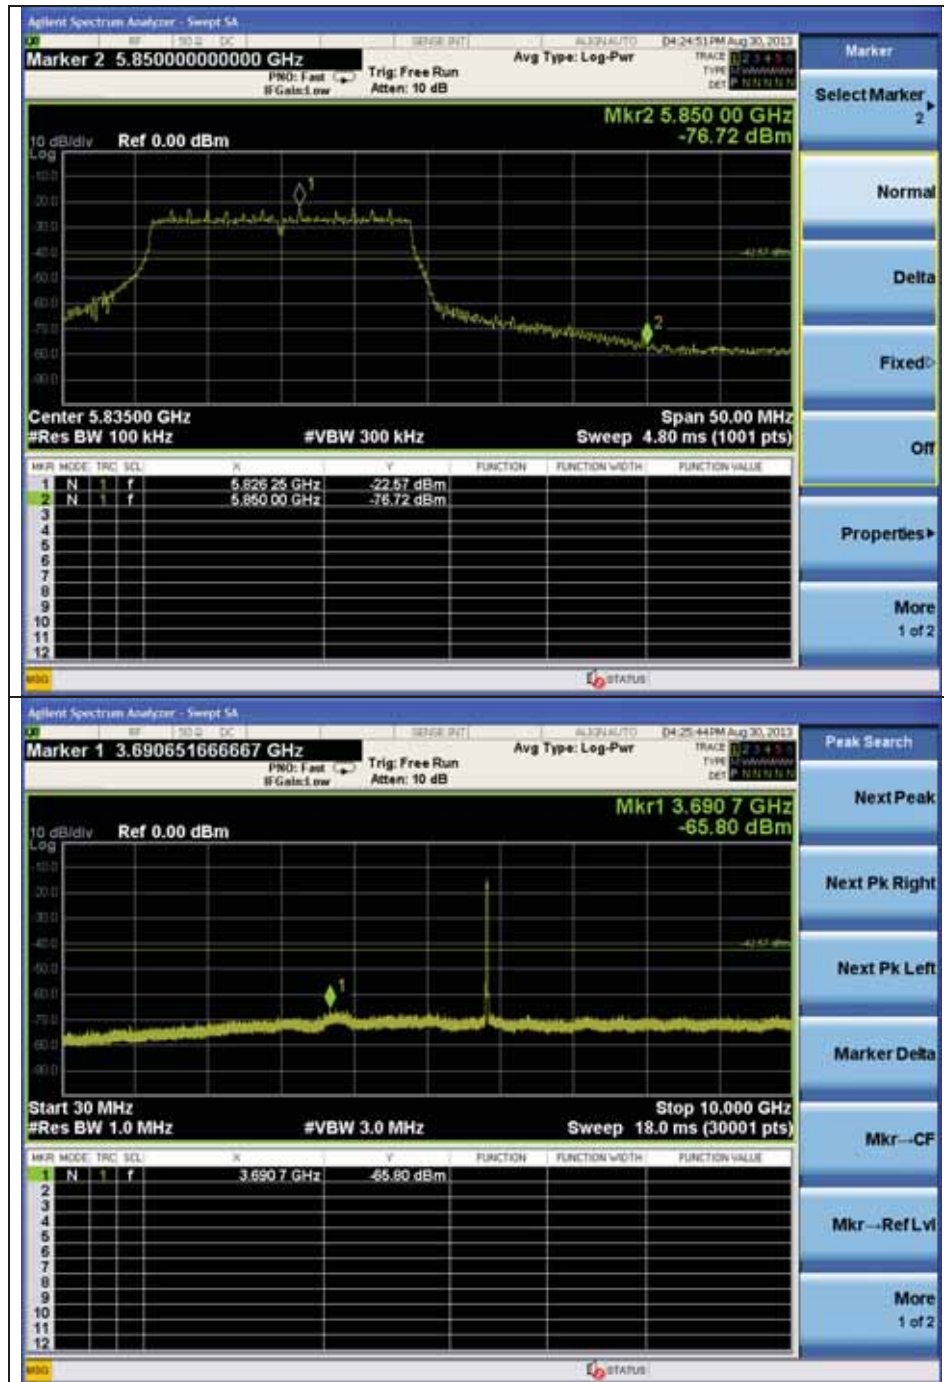

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

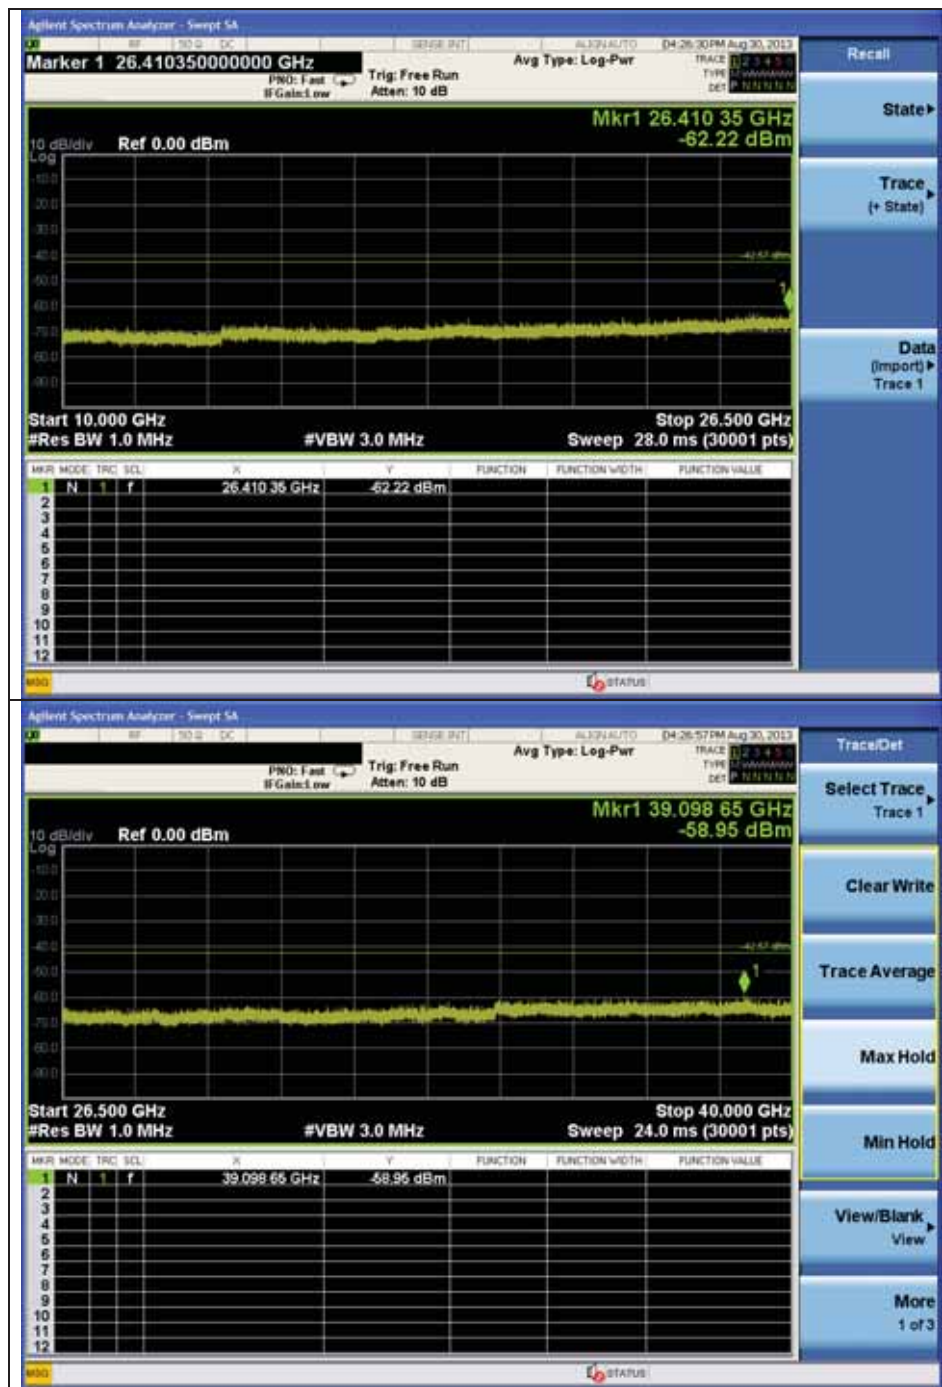

Note:

Offset (dB) = Attenuator (dB) + Cable loss (dB)


Result (dB m) = Spurious offset (dB) + Reading values (dB m)

Frequency (MHz)	offset (dB)	Reading values (dB m)	Result (dB m)
3 690.70	-	Noise level	-
5 850.00	16.96	-76.72	-59.76
26 410.35	-	Noise level	-
36 098.65	-	Noise level	-


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

OFDM : 802.11n_HT40(MCS8)

Low Channel

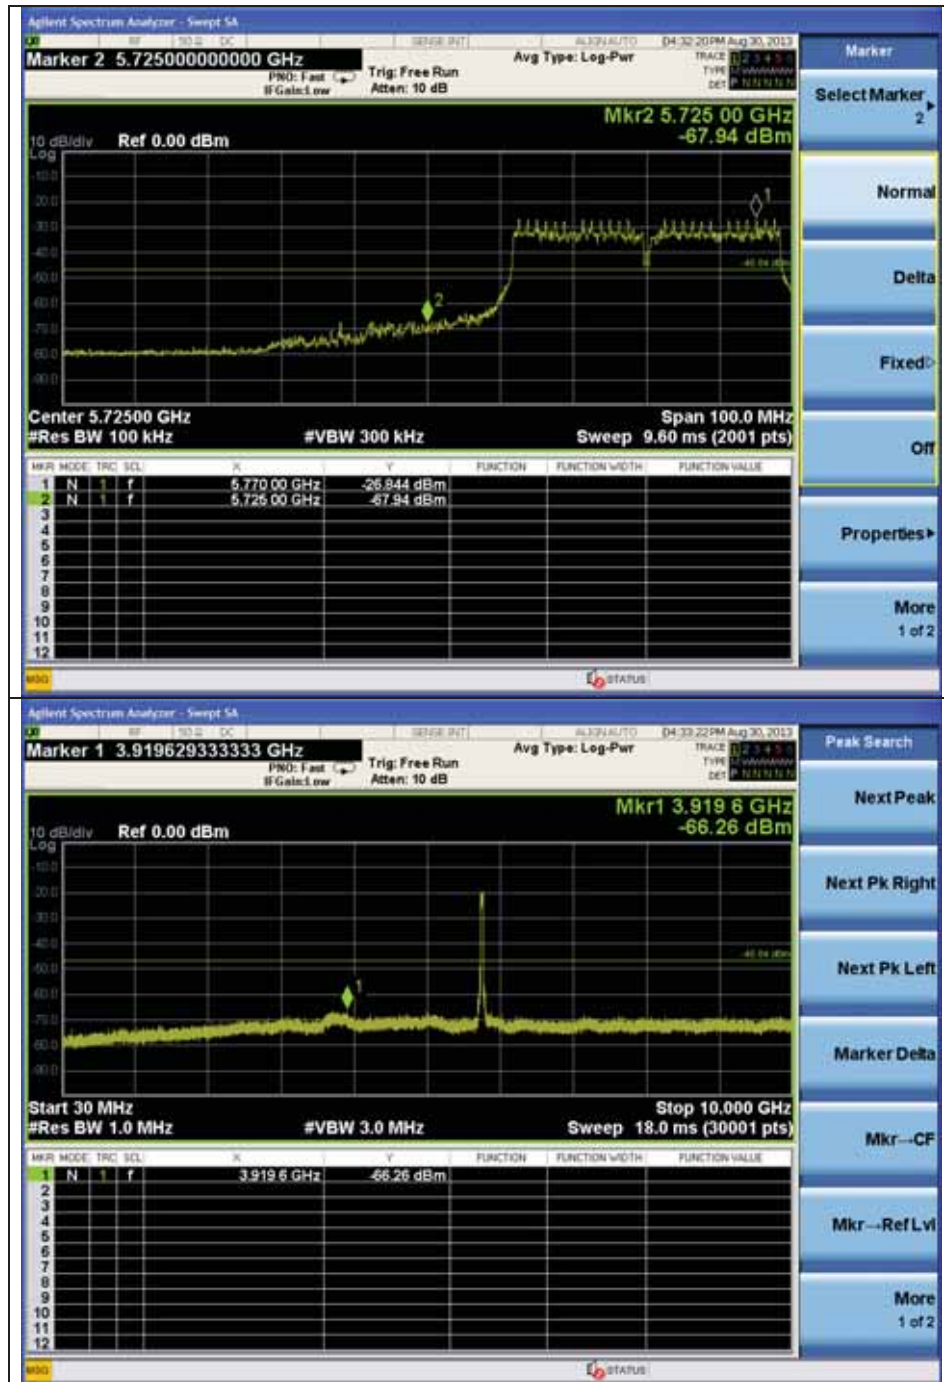

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

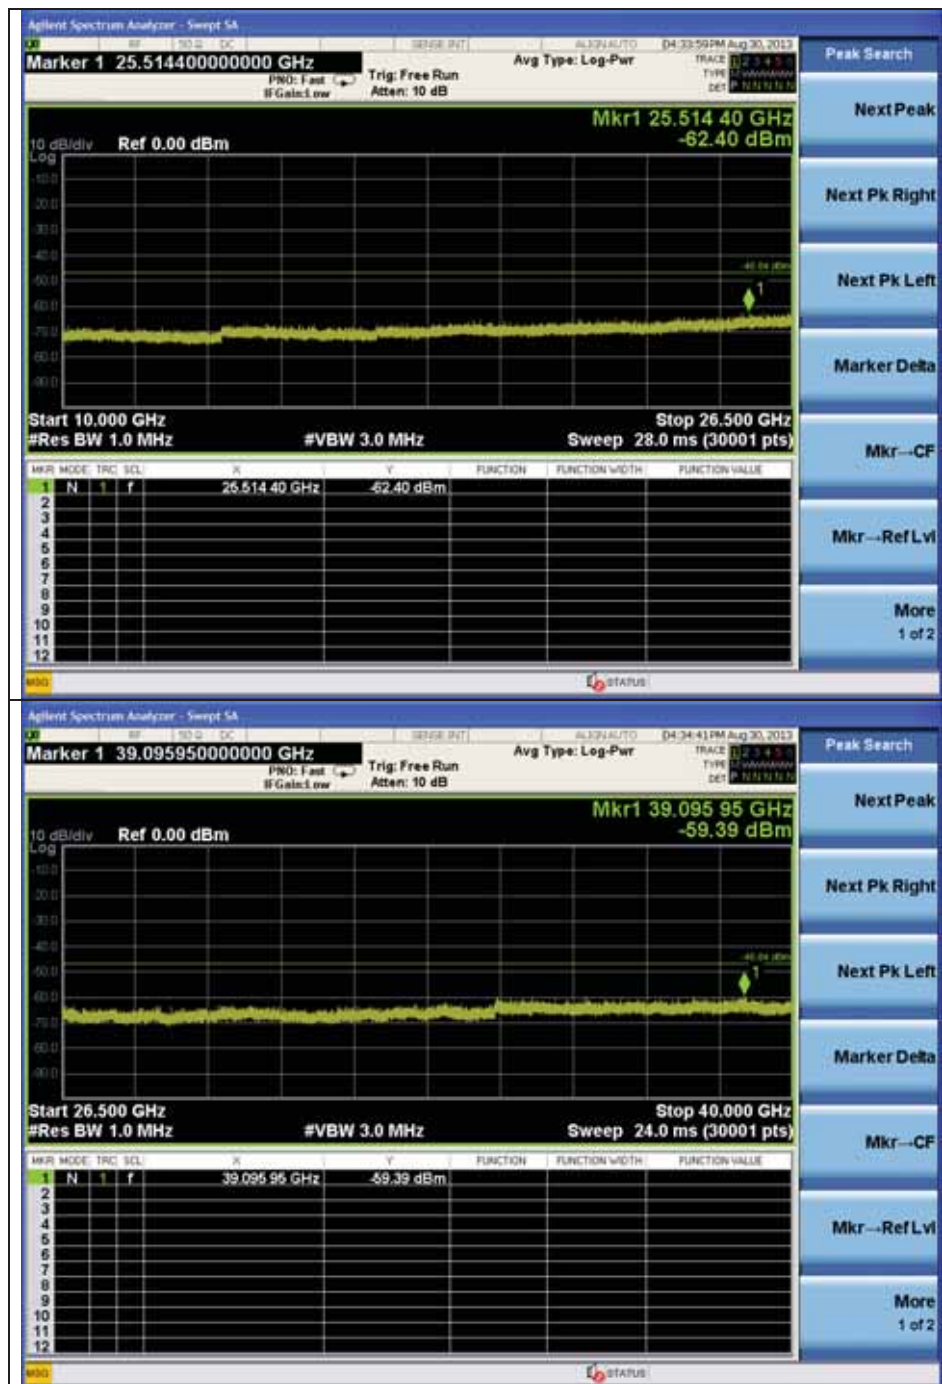

Note:


Offset (dB) = Attenuator (dB) + Cable loss (dB)

Result (dB m) = Spurious offset (dB) + Reading values (dB m)


Frequency (MHz)	offset (dB)	Reading values (dB m)	Result (dB m)
3 919.60	-	Noise level	-
5 725.00	16.73	-67.94	-51.21
25 514.40	-	Noise level	-
39 095.95	-	Noise level	-

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

High Channel

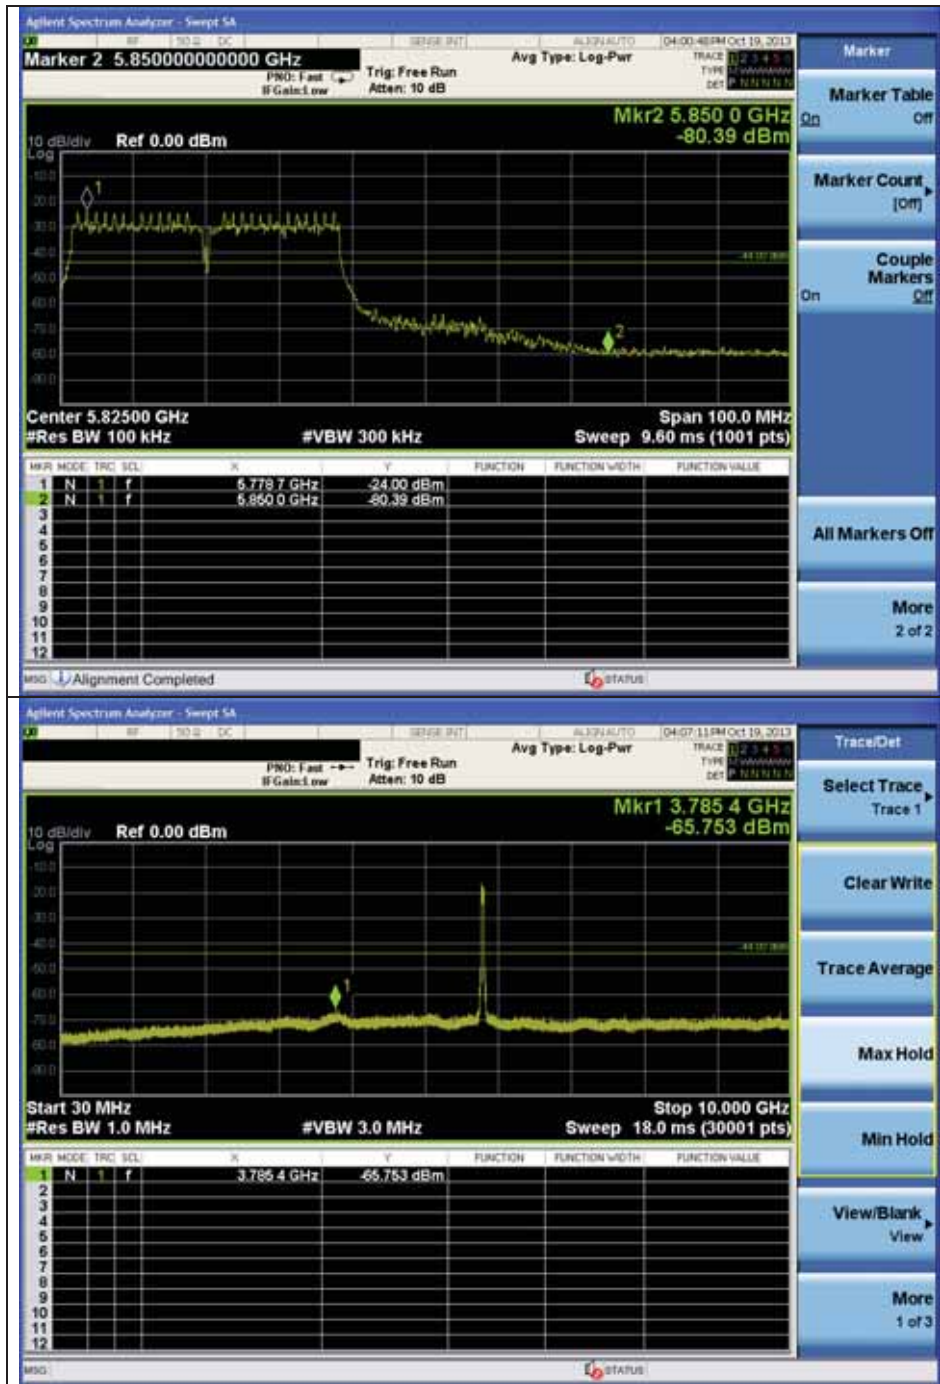

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

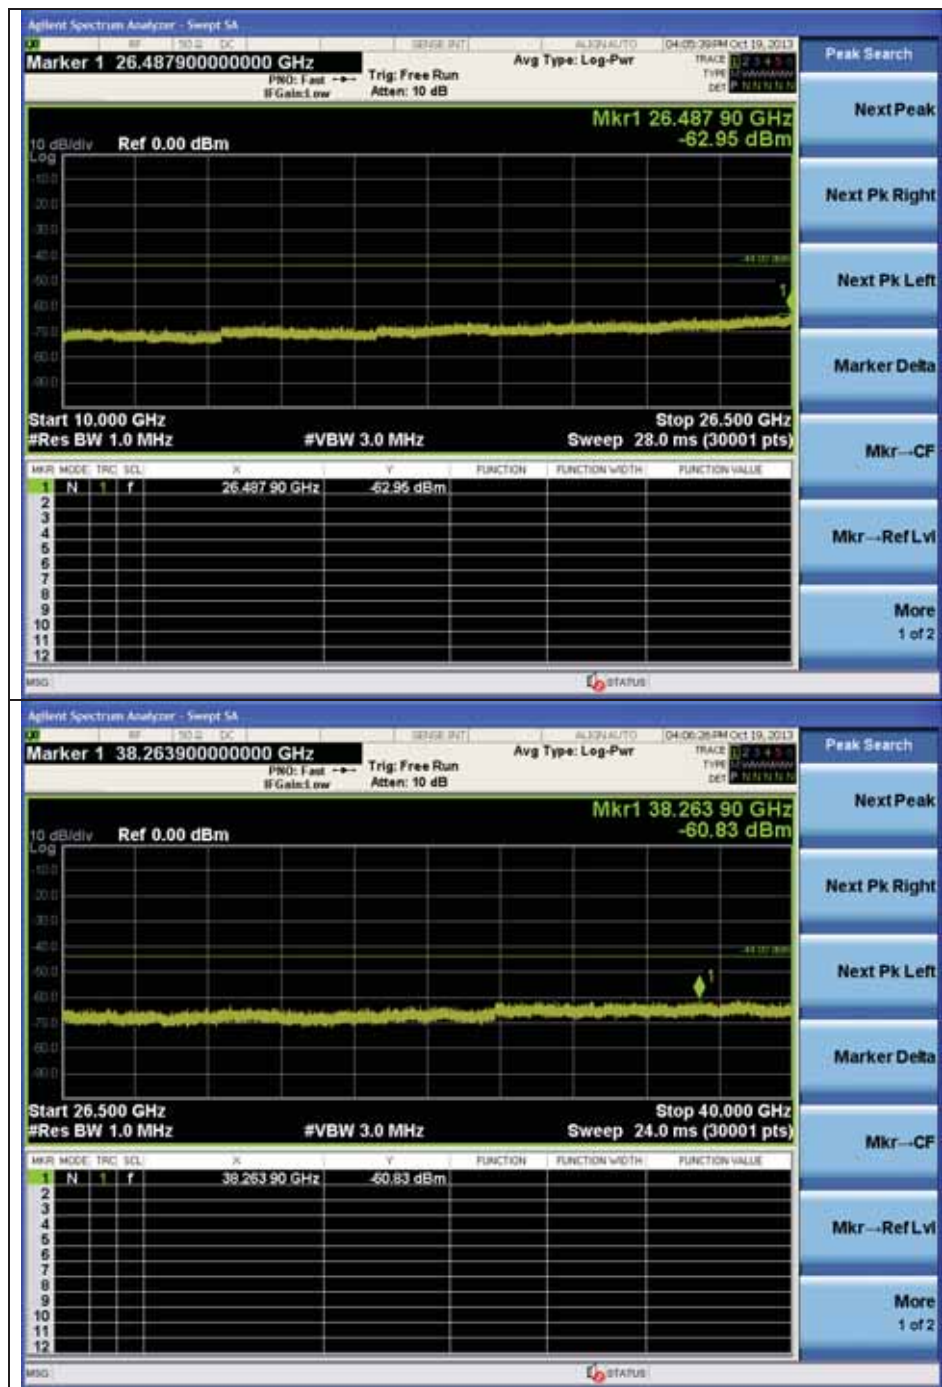

Note:

Offset (dB) = Attenuator (dB) + Cable loss (dB)


Result (dB m) = Spurious offset (dB) + Reading values (dB m)

Frequency (MHz)	offset (dB)	Reading values (dB m)	Result (dB m)
3 785.40	-	Noise level	-
5 850.00	16.96	-80.39	-63.43
26 487.90	-	Noise level	-
38 263.90	-	Noise level	-

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

3. 6 dB Bandwidth and 99% Bandwidth measurement

3.1. Test Setup



3.2. Limit

According to §15.247(a)(2), systems using digital modulation techniques may operate in the 902 ~928 MHz, 2 400 ~ 2 483.5 MHz, and 5 725 ~ 5 825 MHz bands. The minimum of 6 dB Bandwidth shall be at least 500 kHz

3.3. Test Procedure

3.3.1. 6 dB Bandwidth

All data rates and modes were investigated for this test. The full data for the worst case data rate are reported in this section.

The test follows section 8.0 of FCC KDB Publication 558074_v03r01

Tests performed using section 8.1 Option 2.

- Option 2:

The automatic bandwidth measurement capability of the spectrum analyzer was used to perform the X dB bandwidth mod with X set to 6 dB, if the functionality described above(i.e., RBW = 100 kHz, VBW $\geq 3 \times$ RBW, peak detector with maximum hold) is implemented by the instrumentation function. When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be ≥ 6 dB

3.3.2. 99% bandwidth

1. Set the spectrum analyzer as SPAN = 2 or 3 times necessary bandwidth, RBW = approximately 1 % of the SPAN, VBW is set to 3 times RBW, Detector = Sample, Trace mode = max hold.
2. Measure lowest and highest frequencies are placed in a running sum until 0.5 % and 99.5 % of the total is reached.
3. Record the SPAN between the lowest and the highest frequencies for the 99 % occupied bandwidth.
4. Repeat until all the test channels are investigated.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

3.4. Test Results

Ambient temperature : (24 ± 2) °C
Relative humidity : 47 % R.H.


Operation Mode	Data Rate (Mbps)	Channel	Channel Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Bandwidth (MHz)
DSSS (802.11b)	1	Low	2 412	10.13	13.39
		Middle	2 437	10.13	13.44
		High	2 462	10.14	13.48
OFDM (802.11g)	6	Low	2 412	16.39	16.39
		Middle	2 437	16.39	16.39
		High	2 462	16.40	16.39
OFDM (802.11n_HT20)	MCS8	Low	2 412	17.61	17.64
		Middle	2 437	17.62	17.62
		High	2 462	17.64	17.63
OFDM (802.11n_HT40)	MCS8	Low	2 422	35.78	36.09
		Middle	2 437	35.78	36.10
		High	2 452	36.01	36.12
OFDM (802.11a)	6	Low	5 745	16.38	16.42
		Middle	5 785	16.36	16.43
		High	5 825	16.41	16.41
OFDM (802.11n_HT20)	MCS8	Low	5 745	17.64	17.63
		Middle	5 785	17.62	17.65
		High	5 825	17.63	17.65
OFDM (802.11n_HT40)	MCS8	Low	5 755	36.32	36.19
		High	5 795	36.02	36.15

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


6 dB Bandwidth
ANT0

DSSS : 802.11b

Low Channel

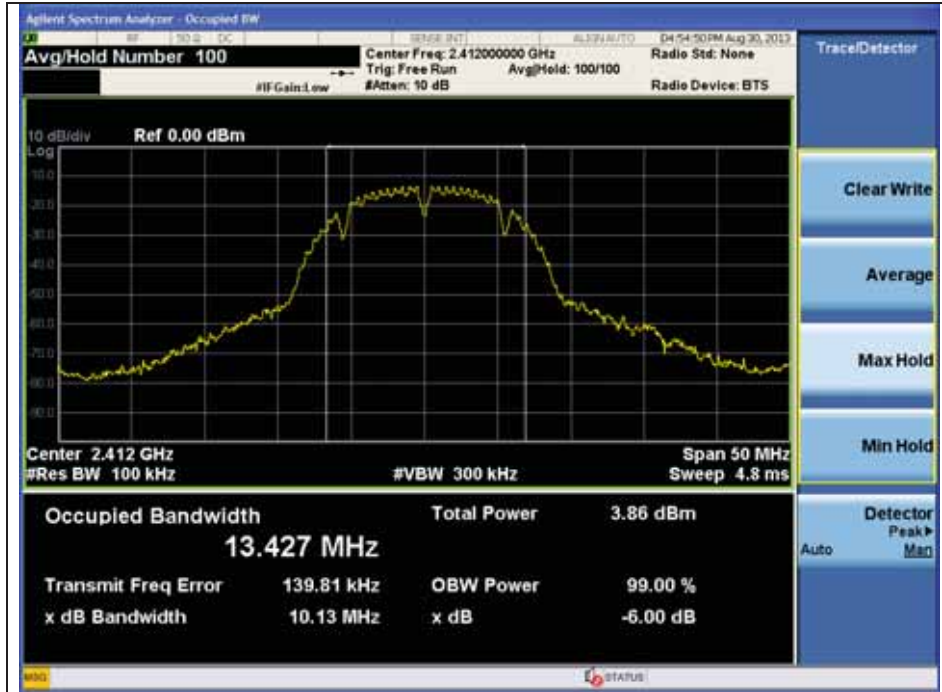


Middle Channel

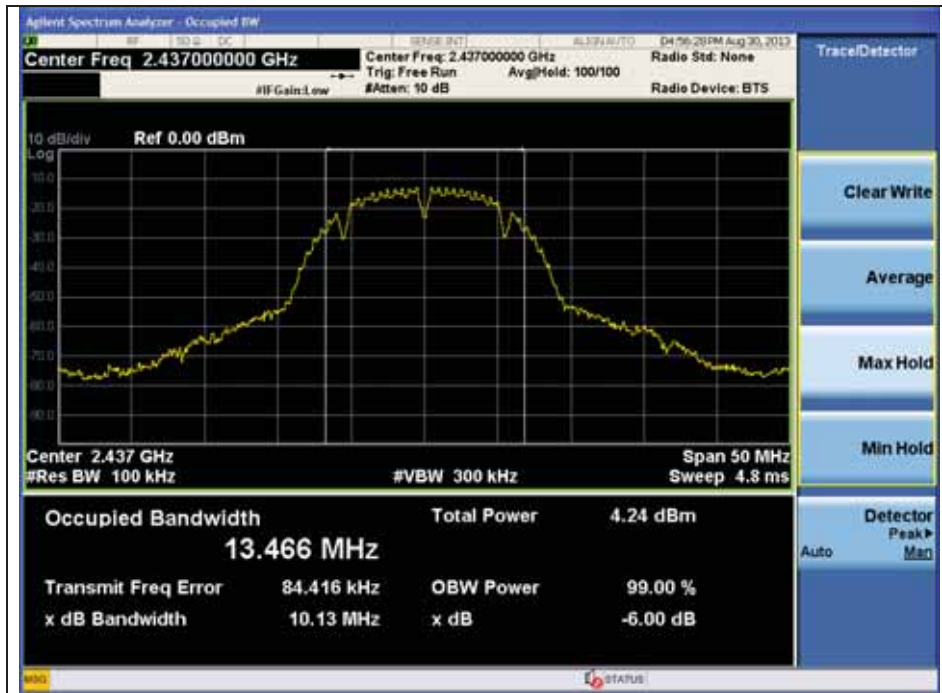

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


High Channel

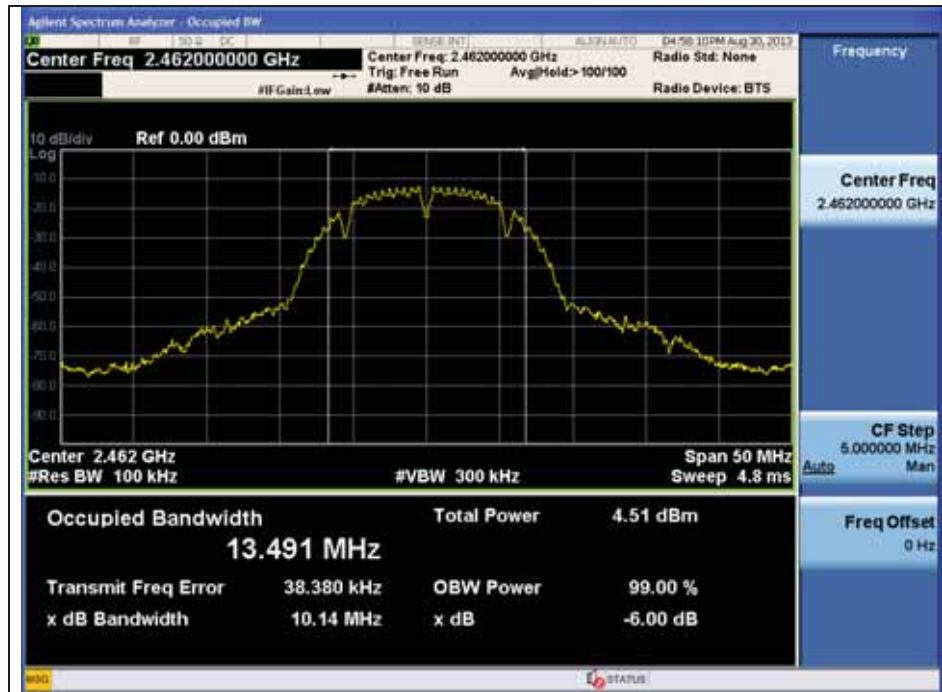


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

OFDM : 802.11g

Low Channel

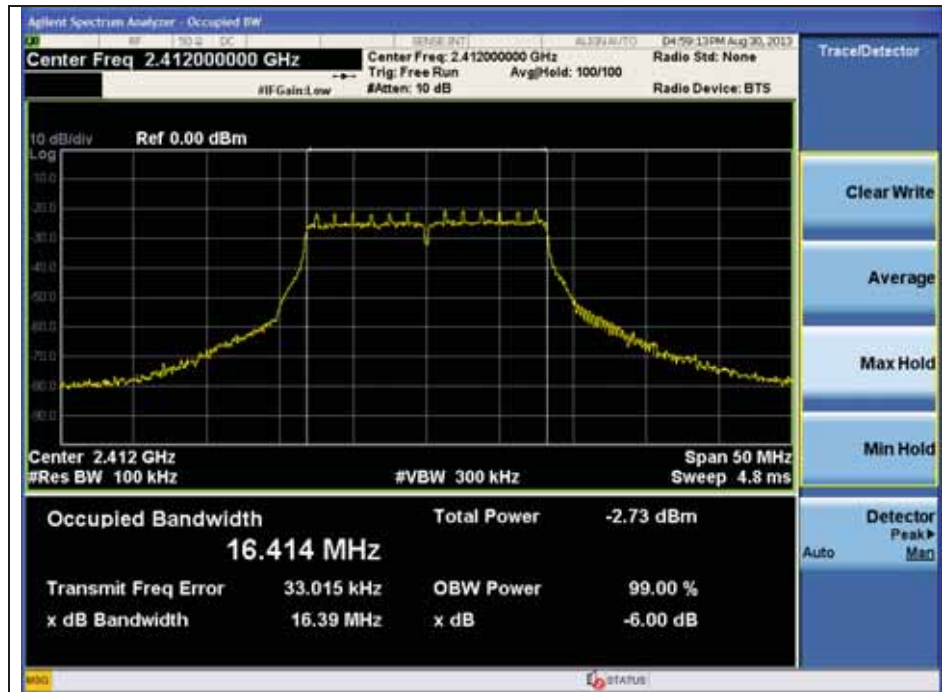


Middle Channel

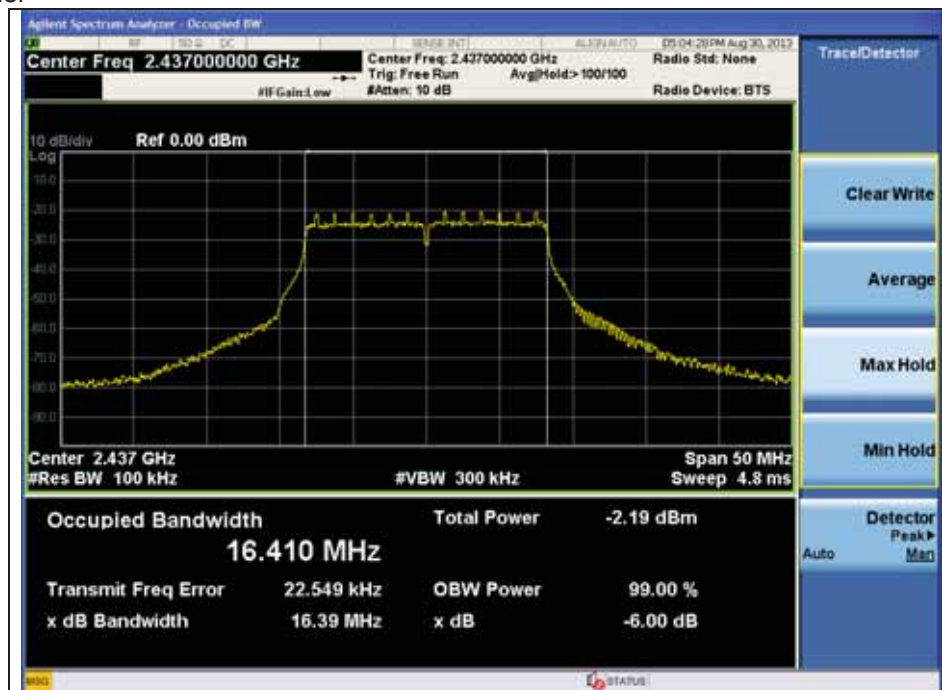

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


High Channel

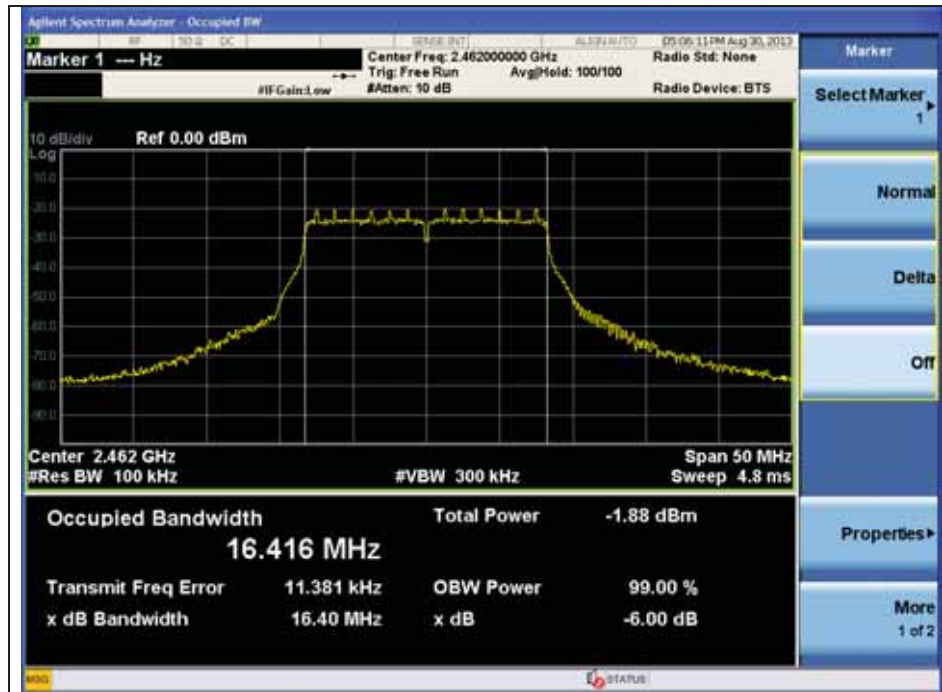


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

OFDM : 802.11n_HT20

Low Channel

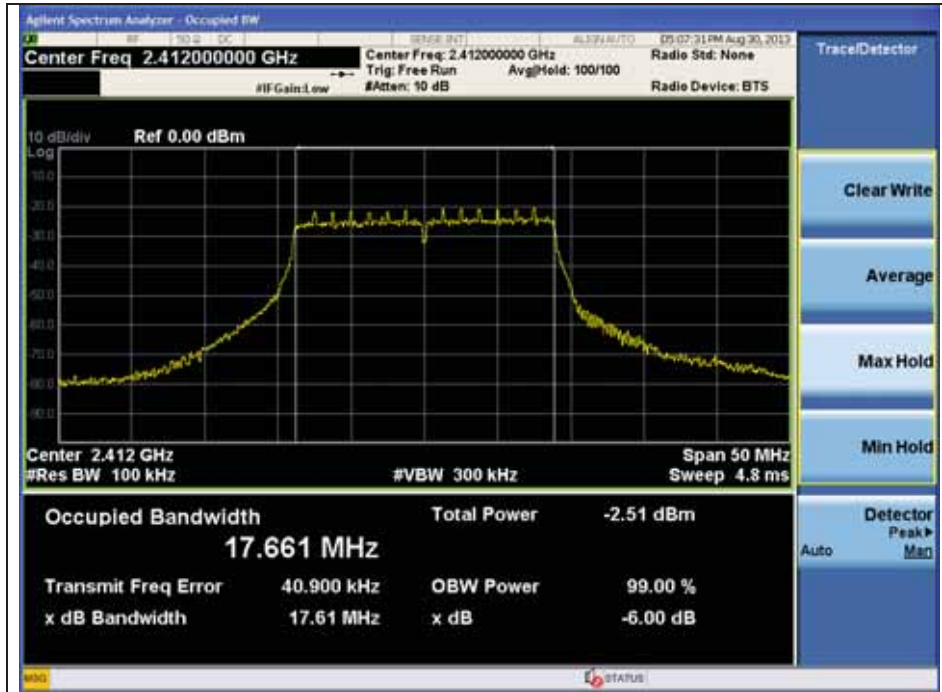


Middle Channel

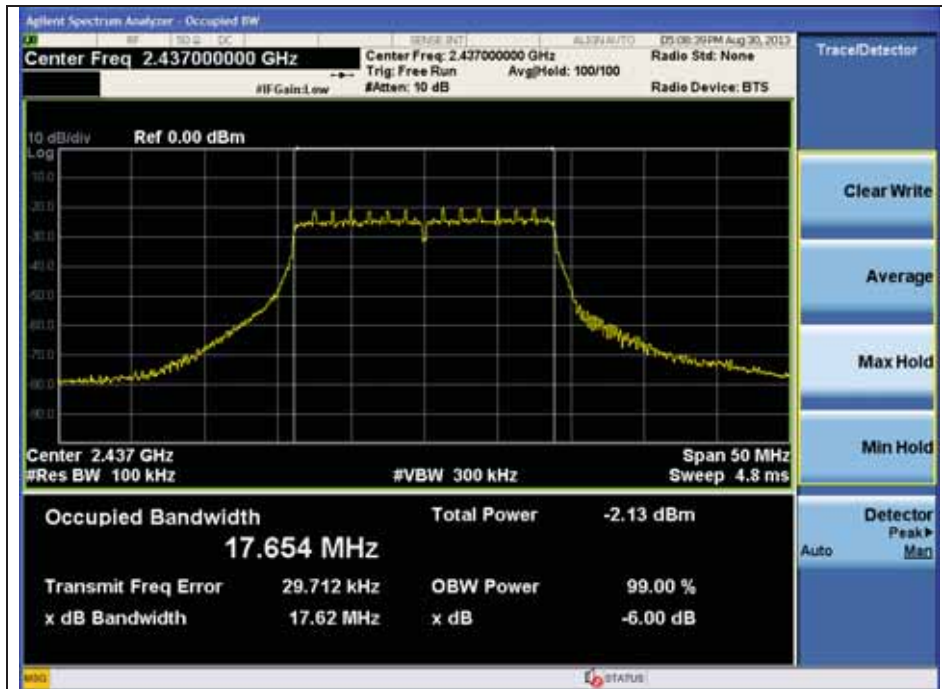

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


High Channel

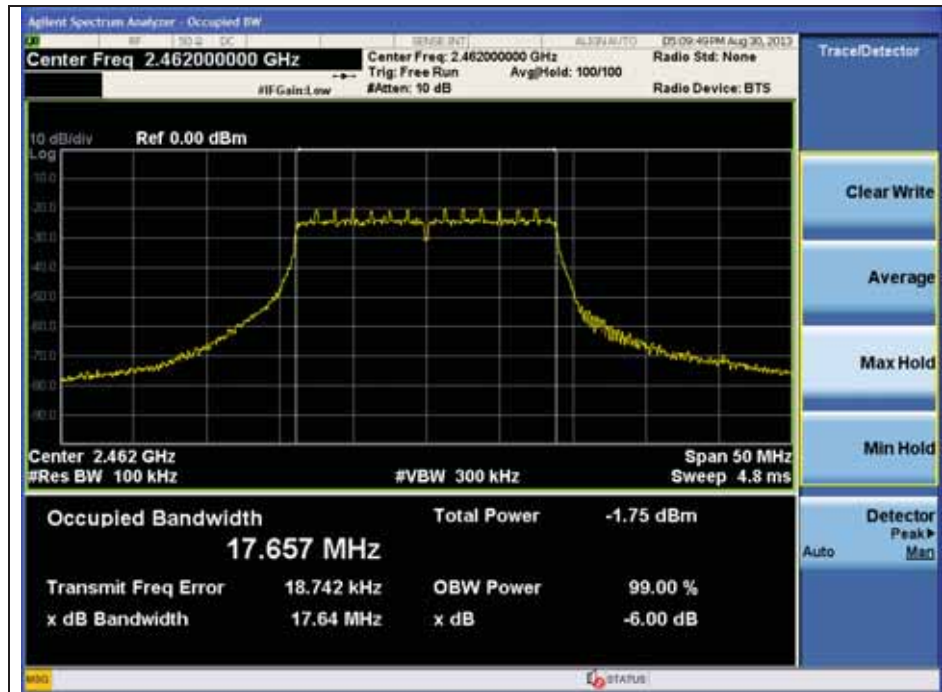


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

OFDM : 802.11n_HT40

Low Channel

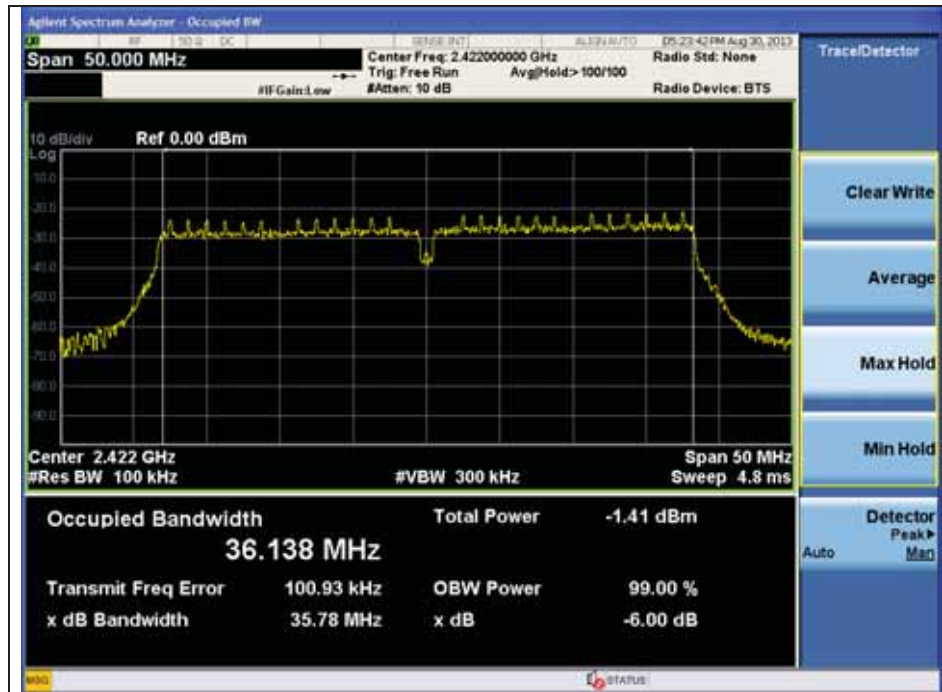


Middle Channel

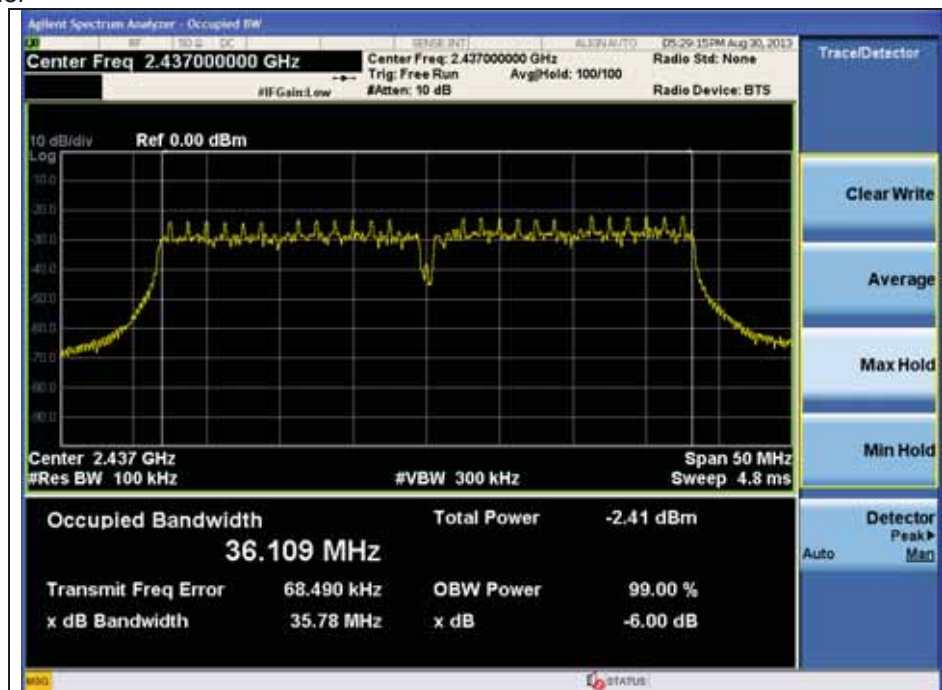

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


High Channel

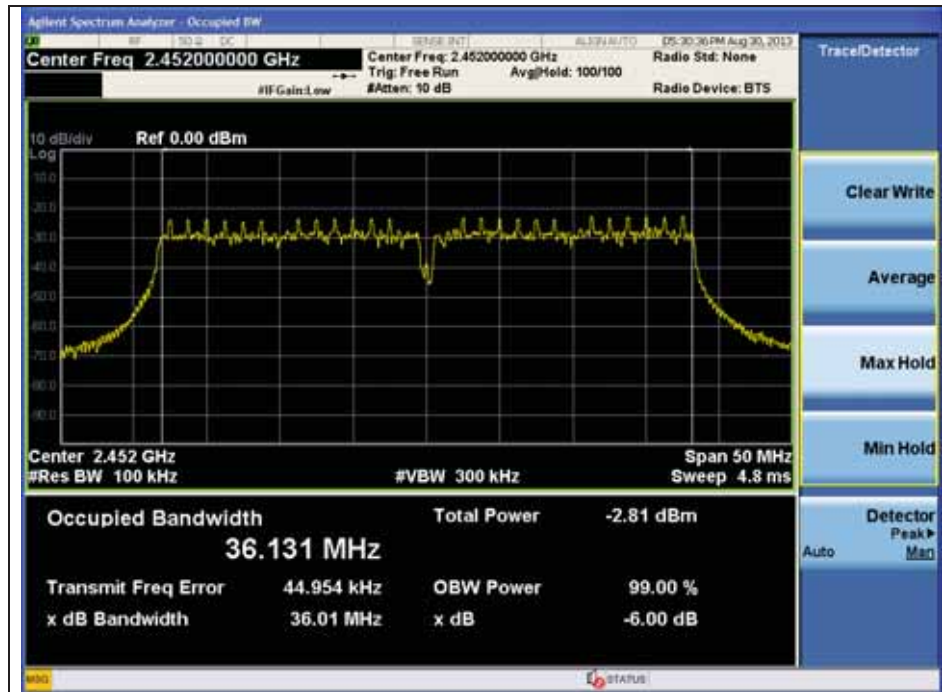


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

OFDM : 802.11a

Low Channel

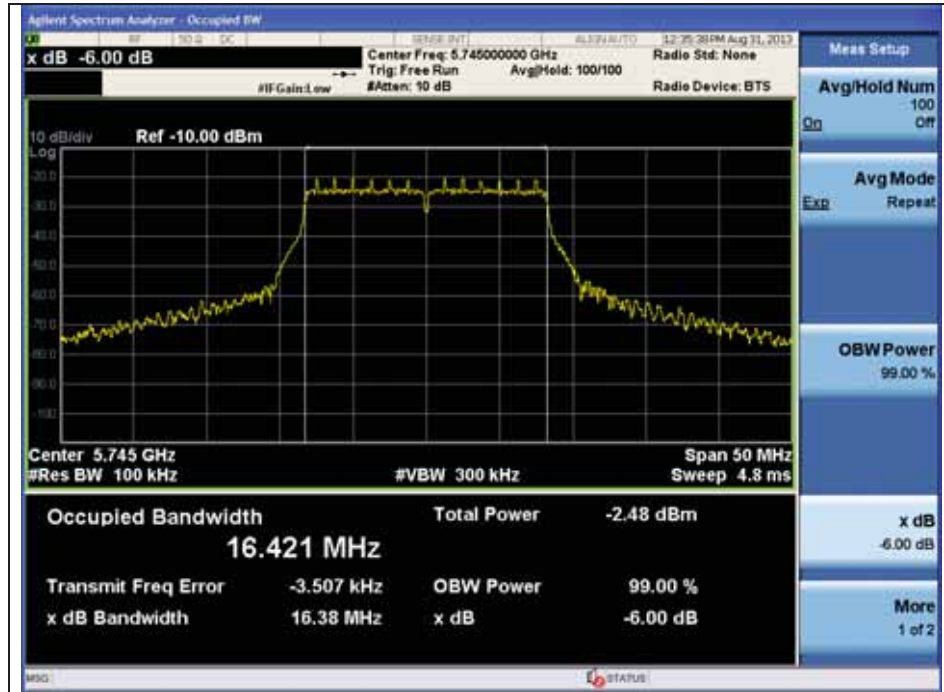


Middle Channel

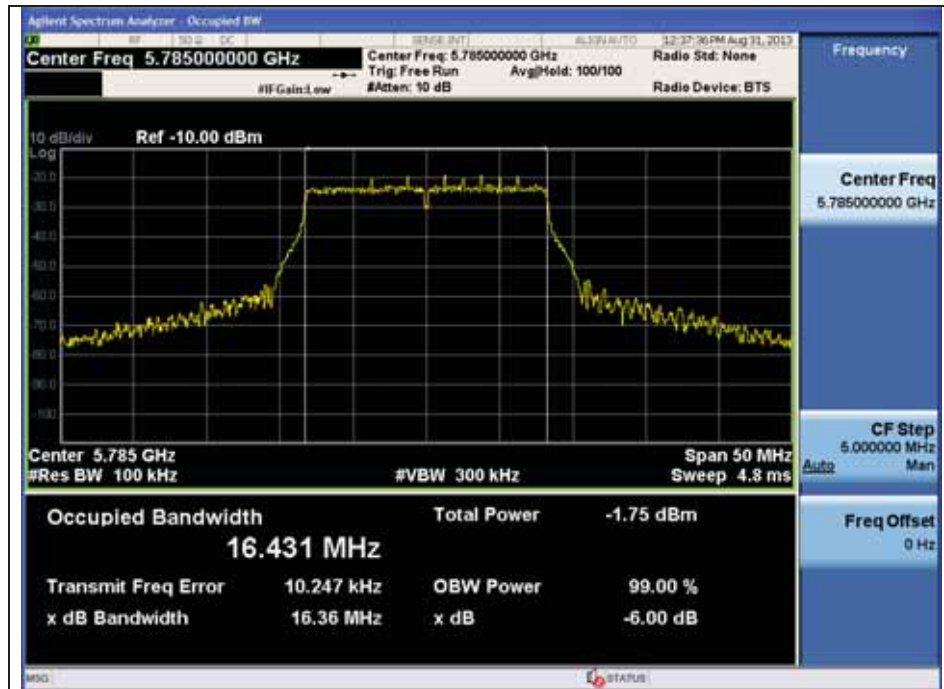

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


High Channel

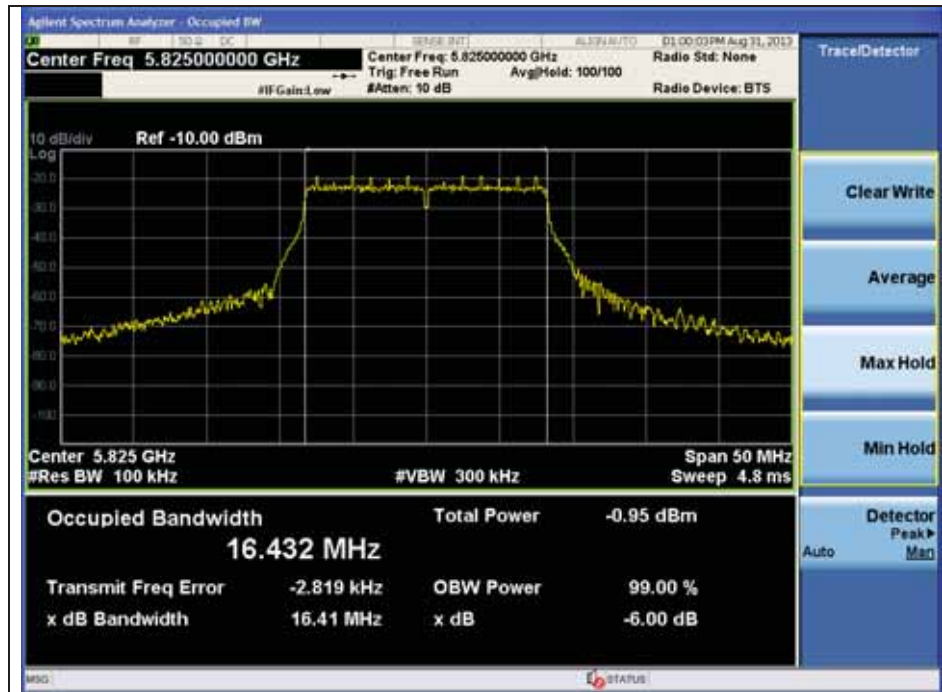


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

OFDM : 802.11n_HT20

Low Channel

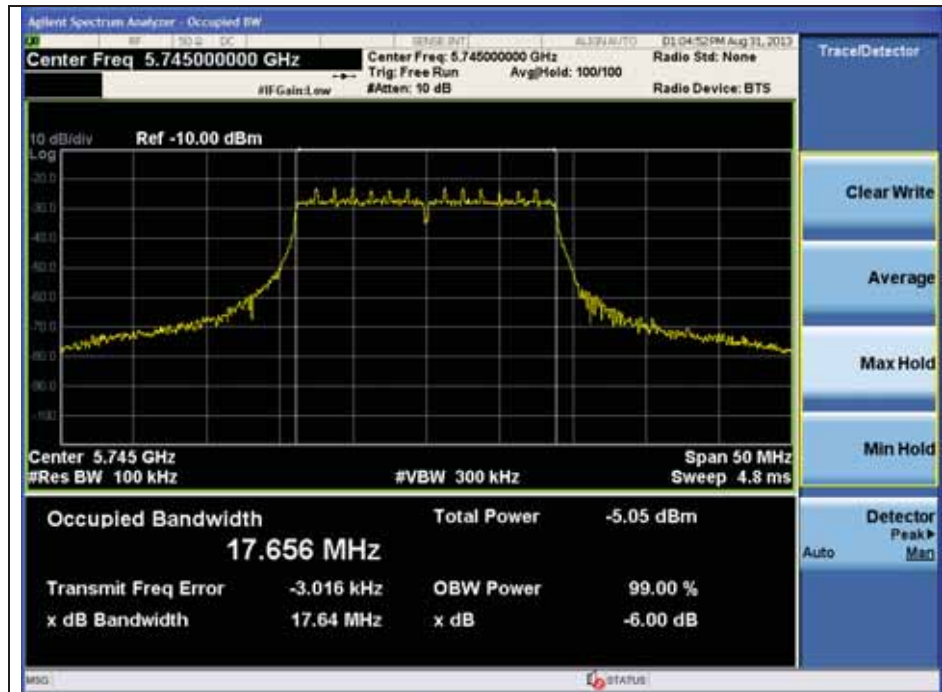


Middle Channel

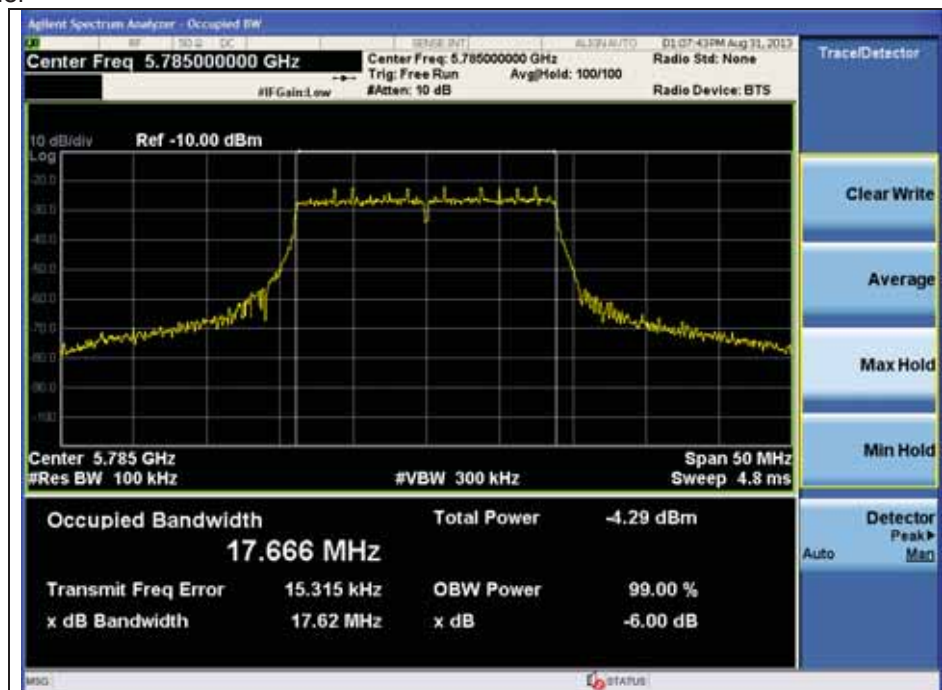

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


High Channel

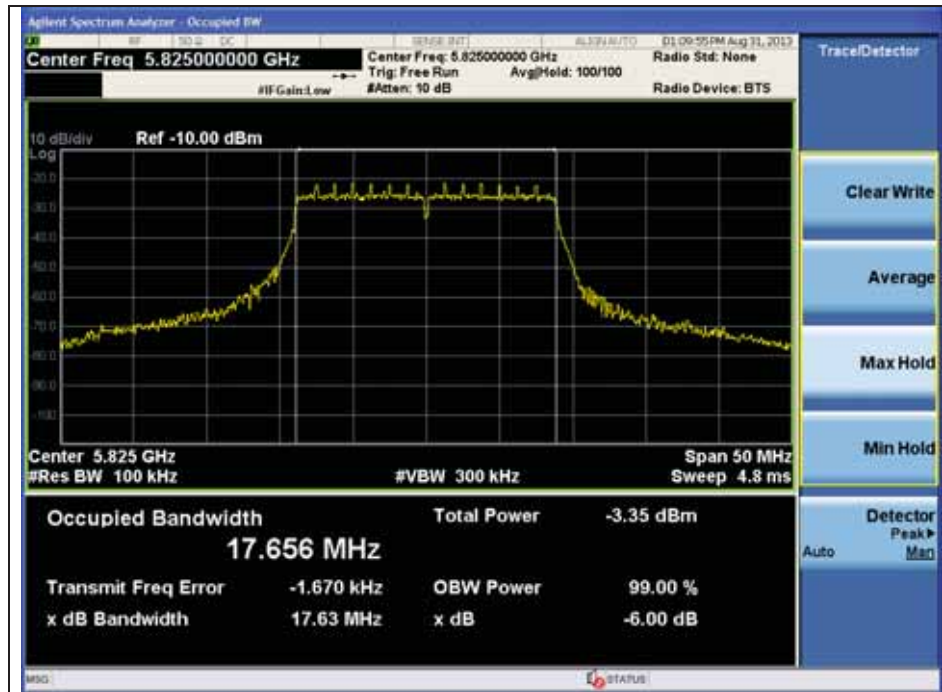


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

OFDM : 802.11n_HT40

Low Channel

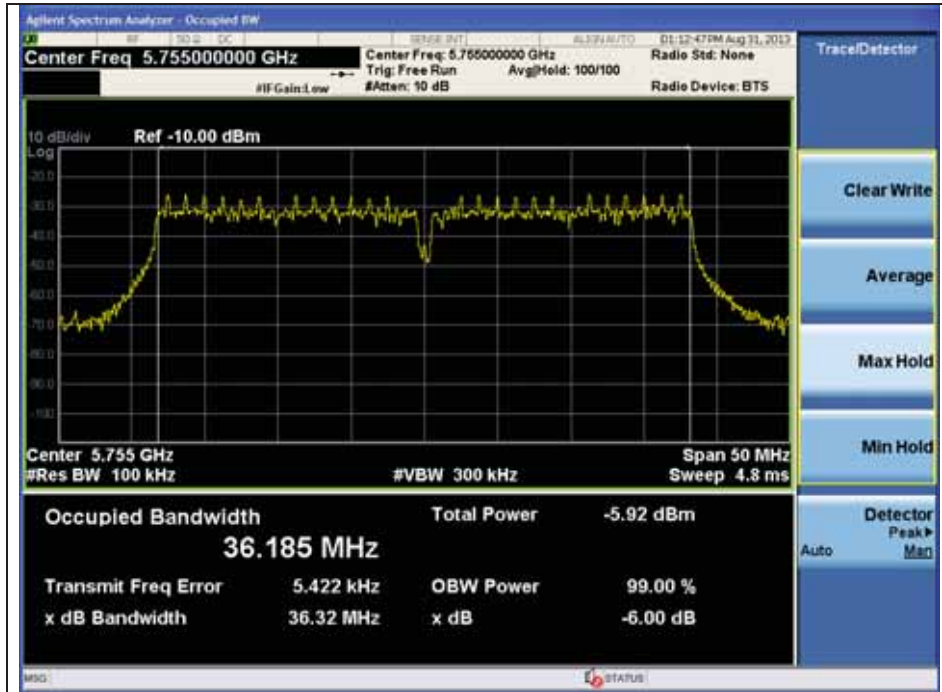

High Channel

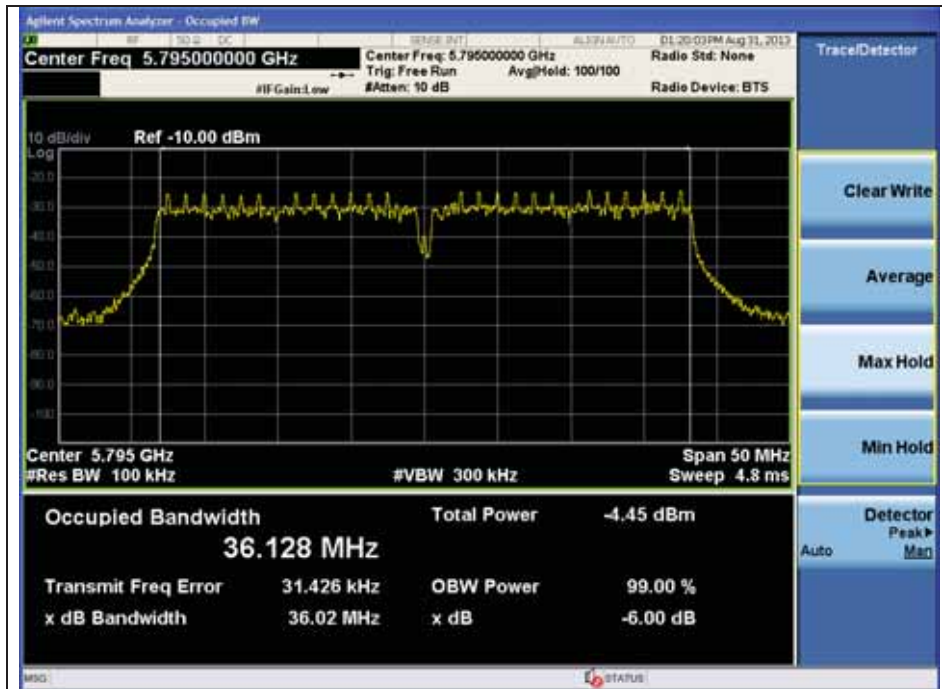


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

99 % Bandwidth
ANT0

DSSS : 802.11b

Low Channel

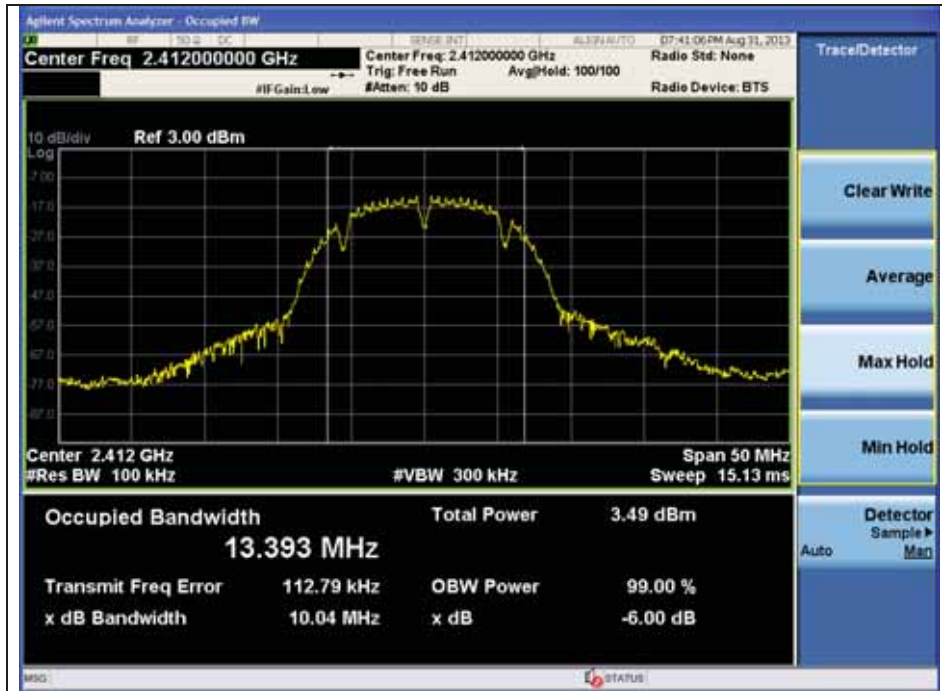

Middle Channel



The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


High Channel




The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

OFDM : 802.11g

Low Channel

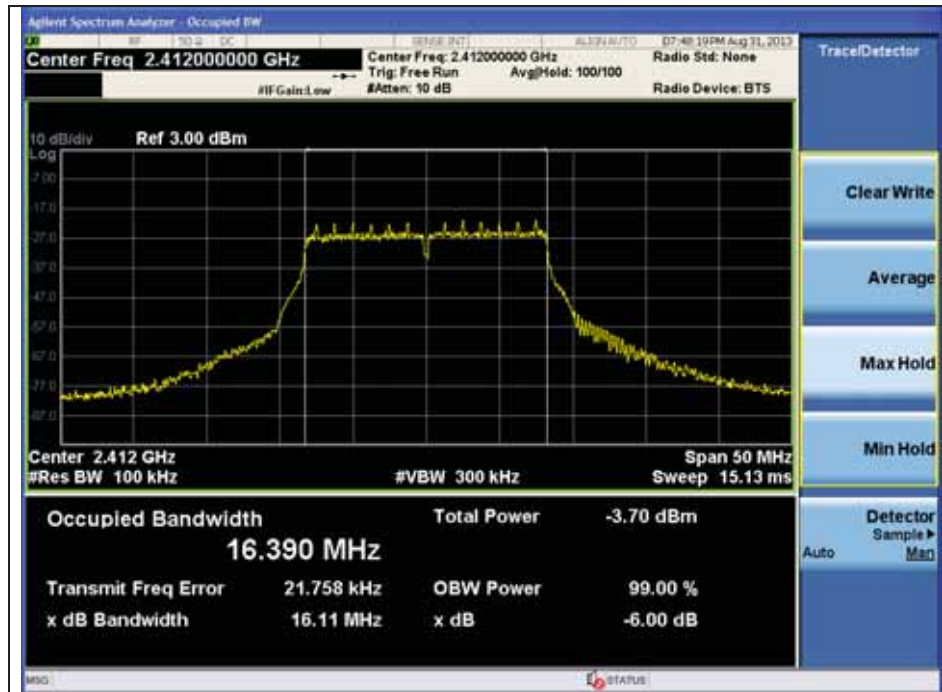


Middle Channel

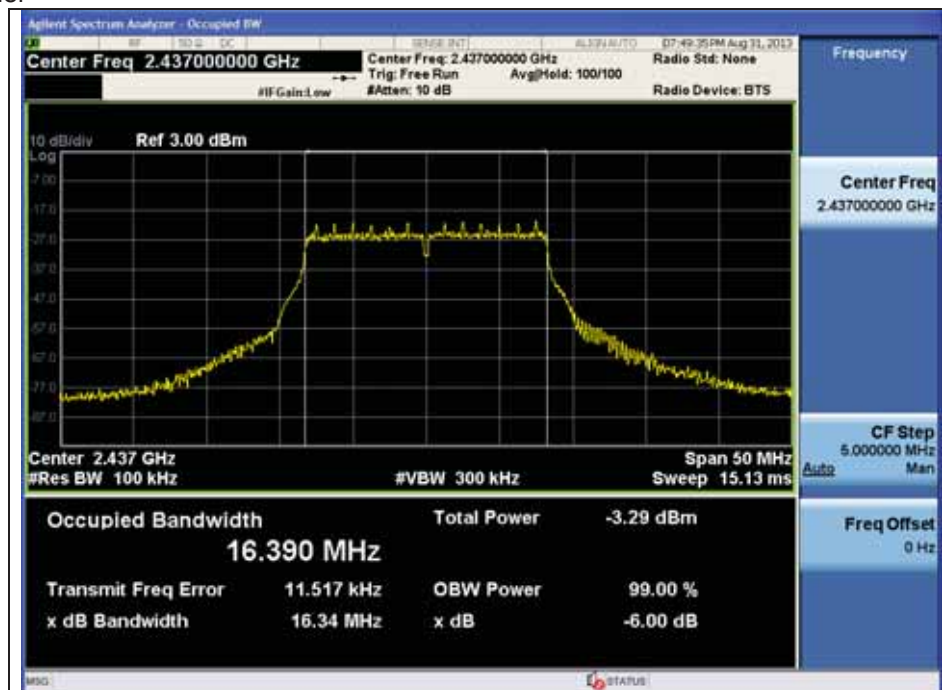

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


High Channel

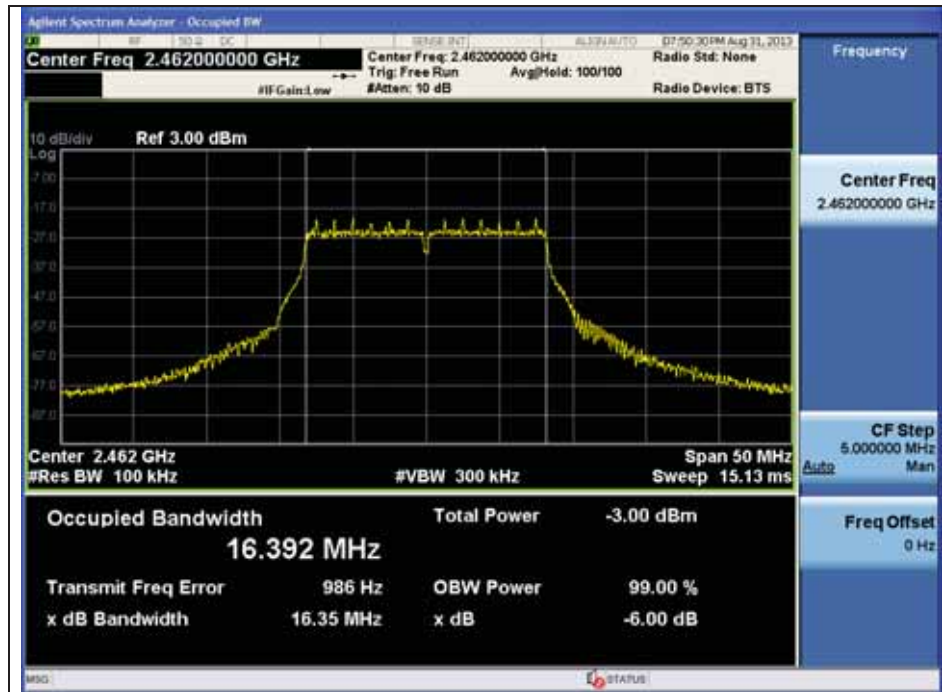


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

OFDM : 802.11n_HT20

Low Channel

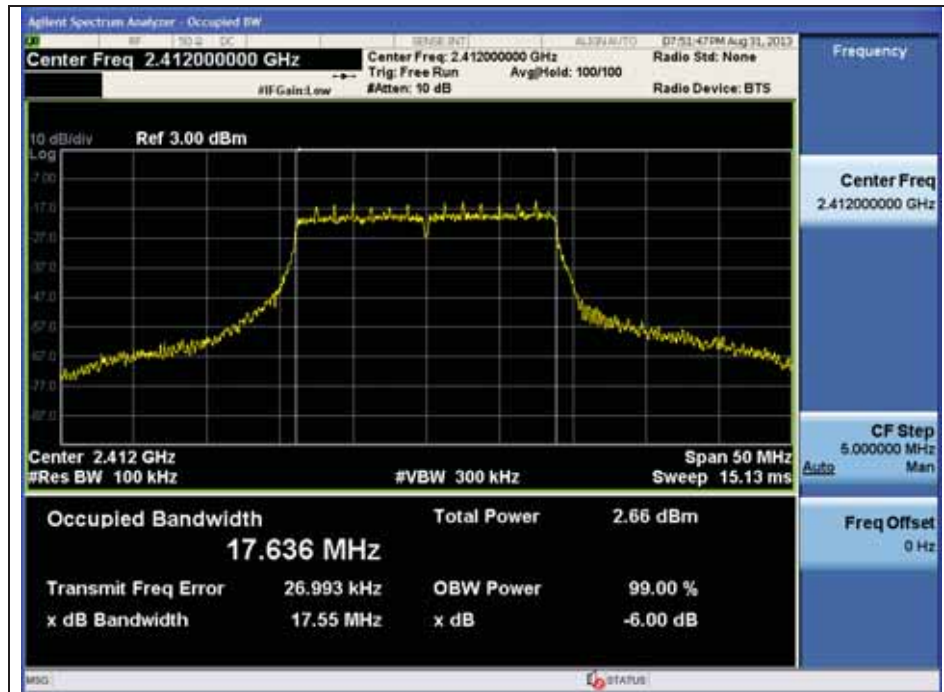


Middle Channel

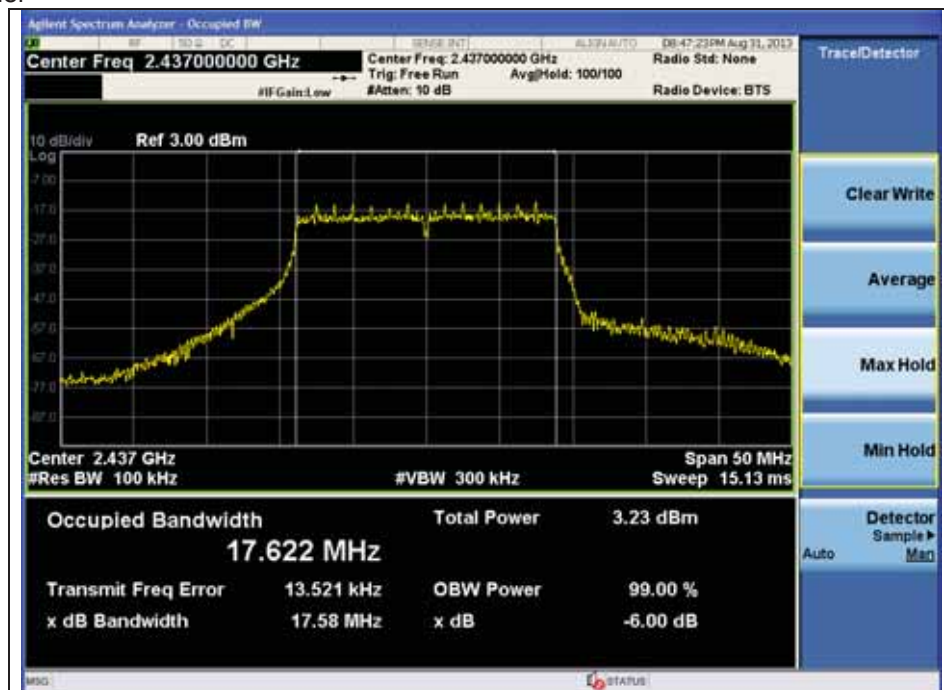

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


High Channel

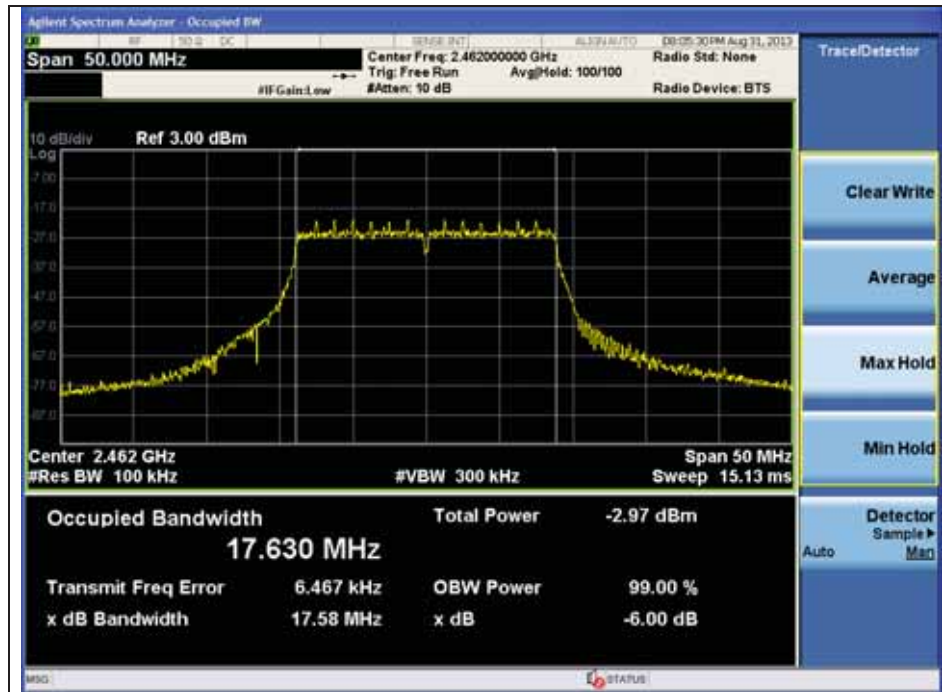


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

OFDM : 802.11n_HT40

Low Channel

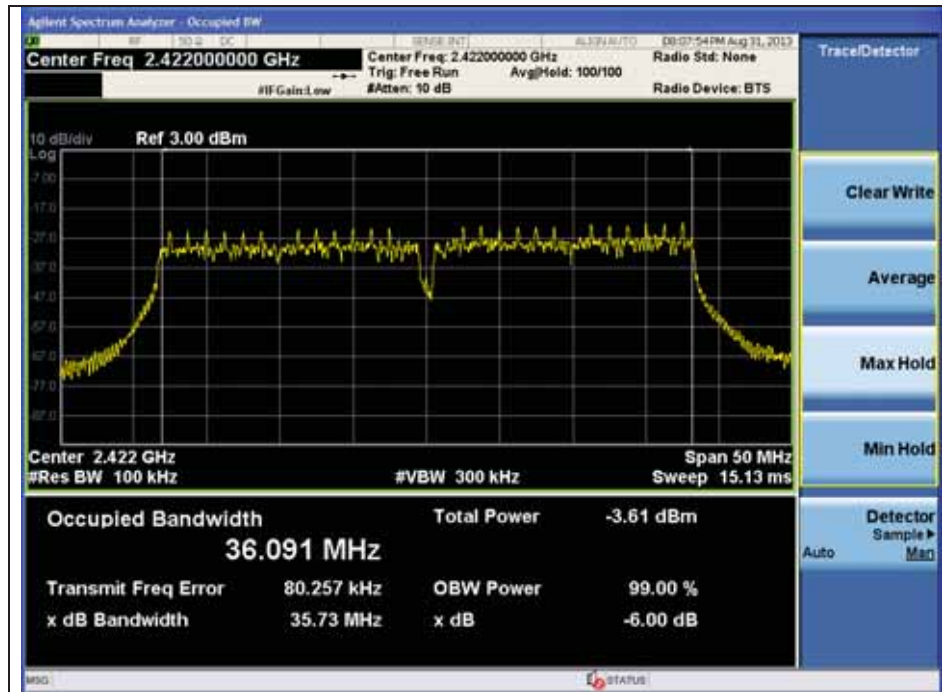


Middle Channel

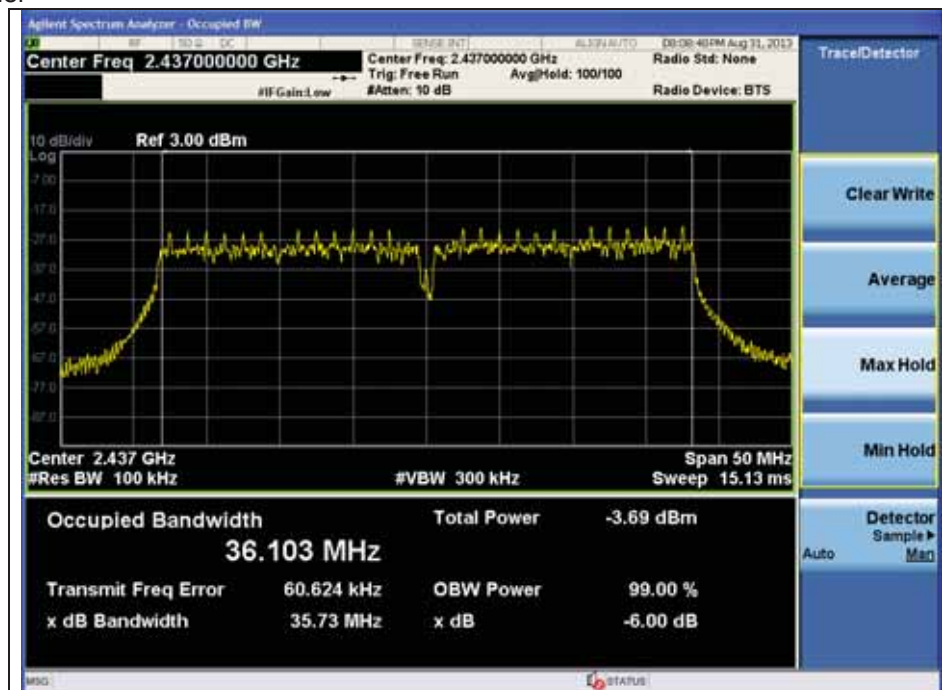

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


High Channel

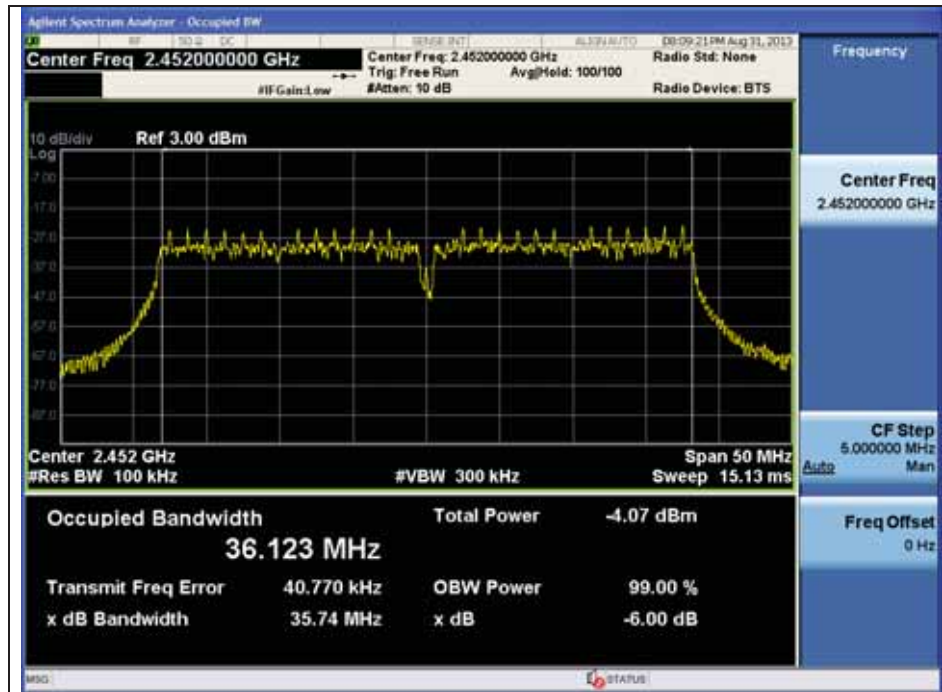


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

OFDM : 802.11a

Low Channel

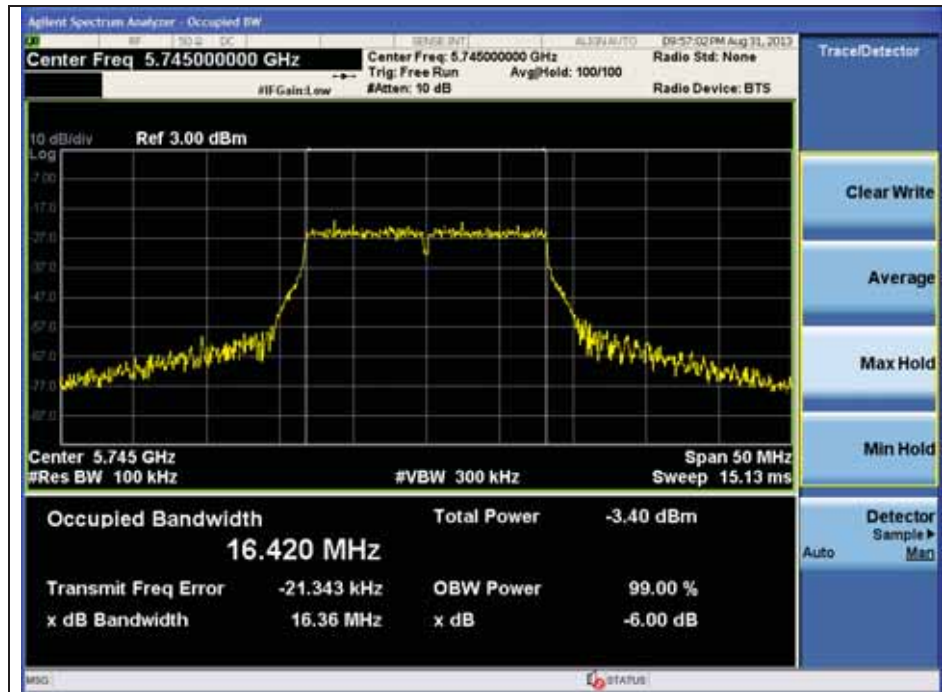


Middle Channel

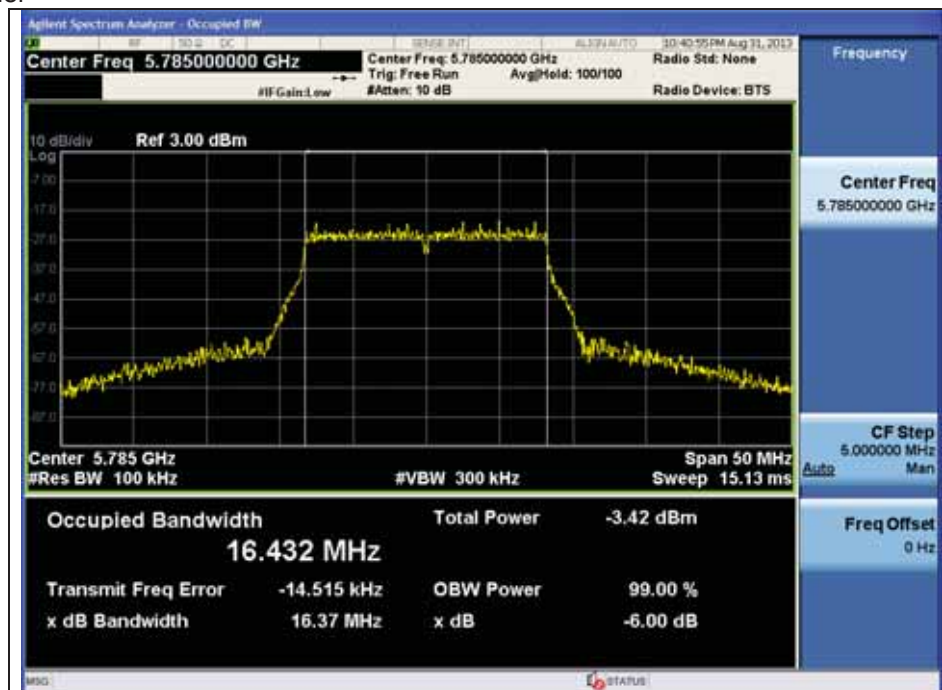

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


High Channel

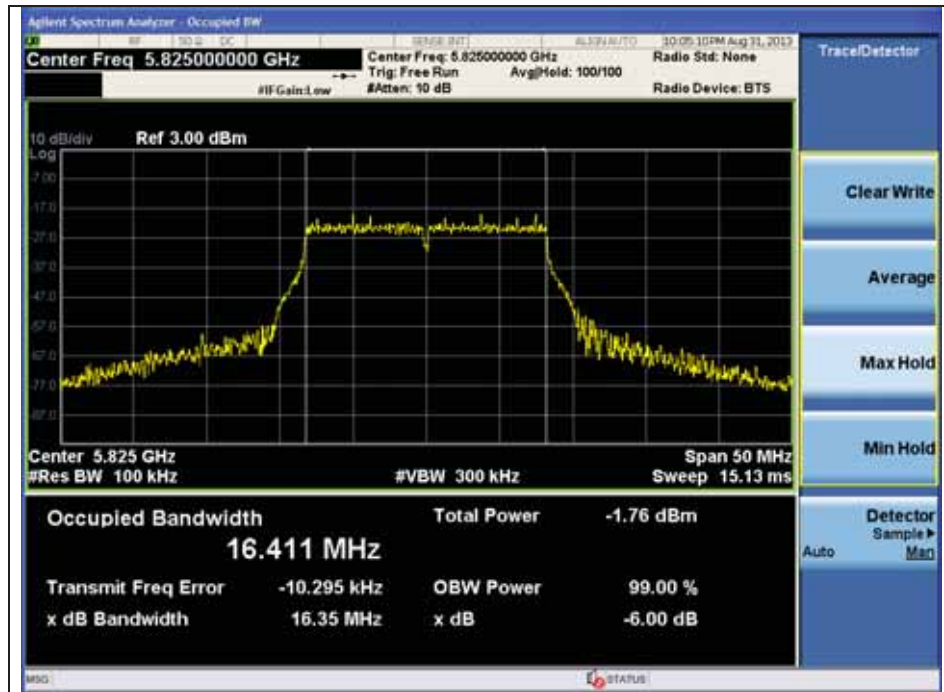


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

OFDM : 802.11n_HT20

Low Channel

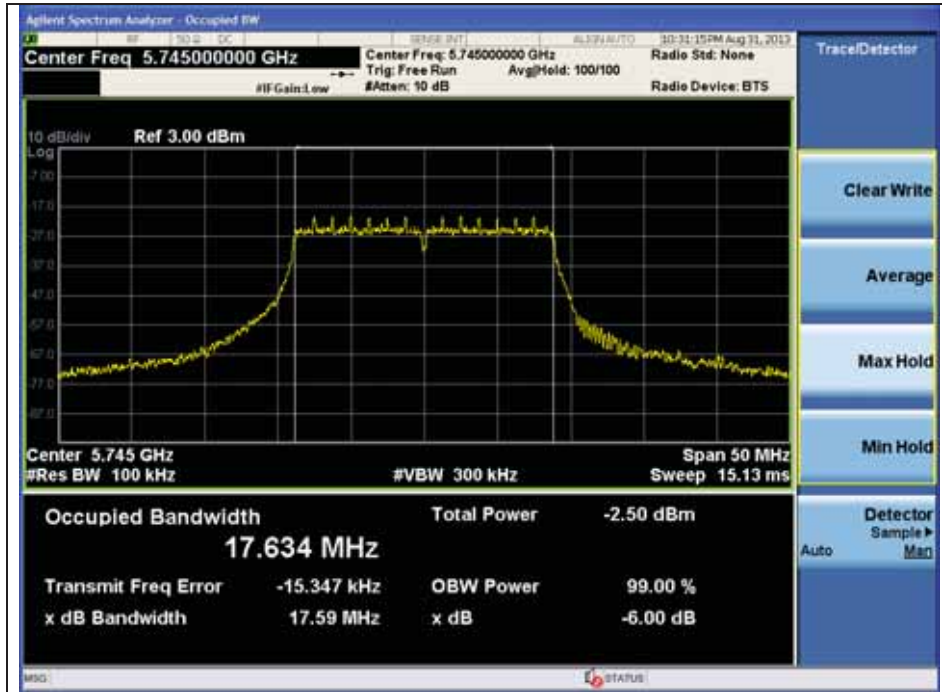


Middle Channel

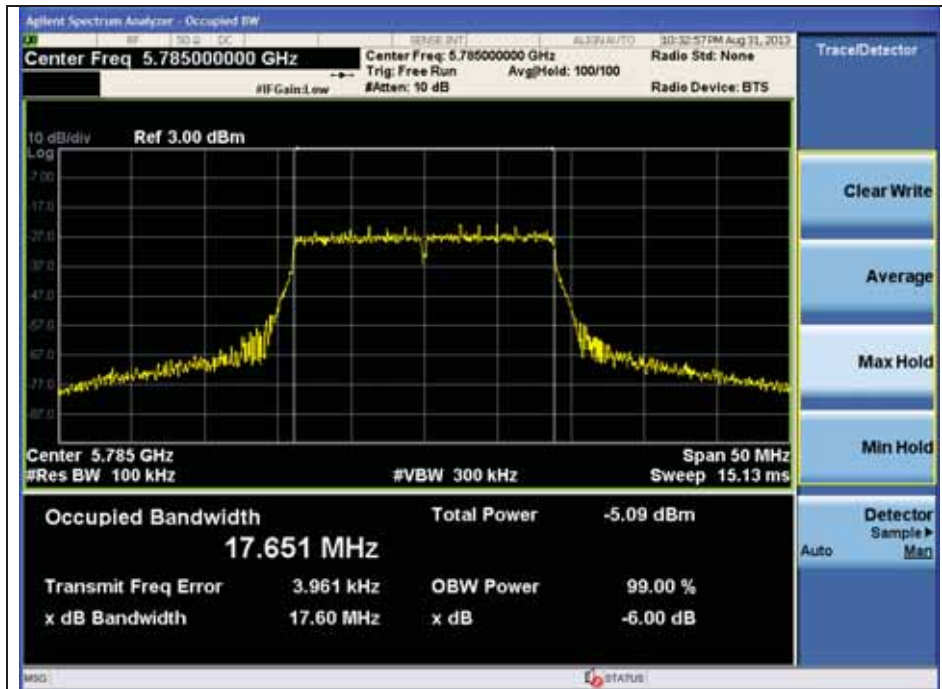

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


High Channel

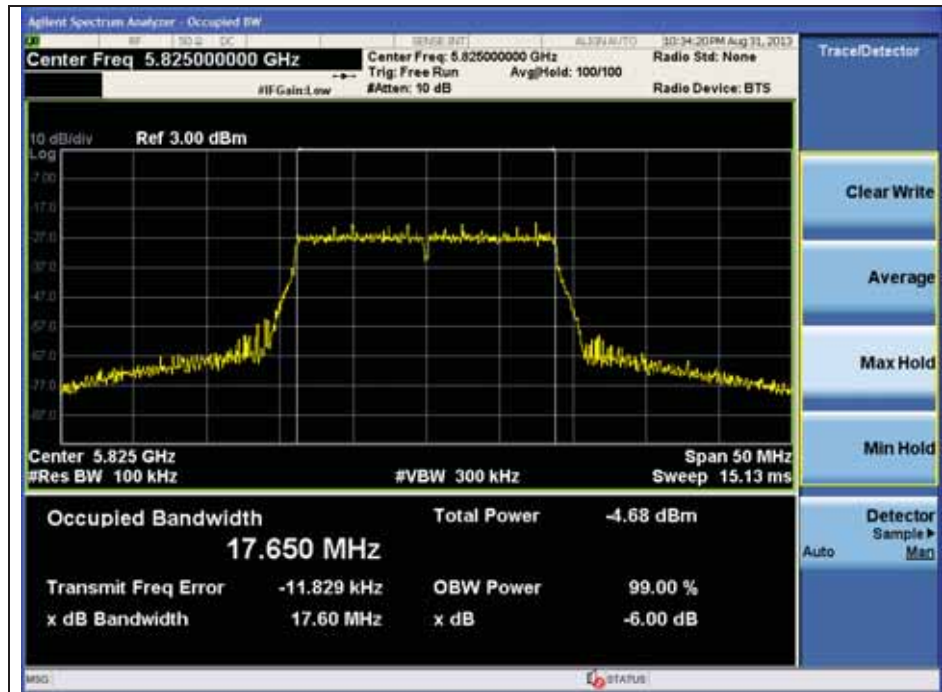


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

OFDM : 802.11n_HT40

Low Channel

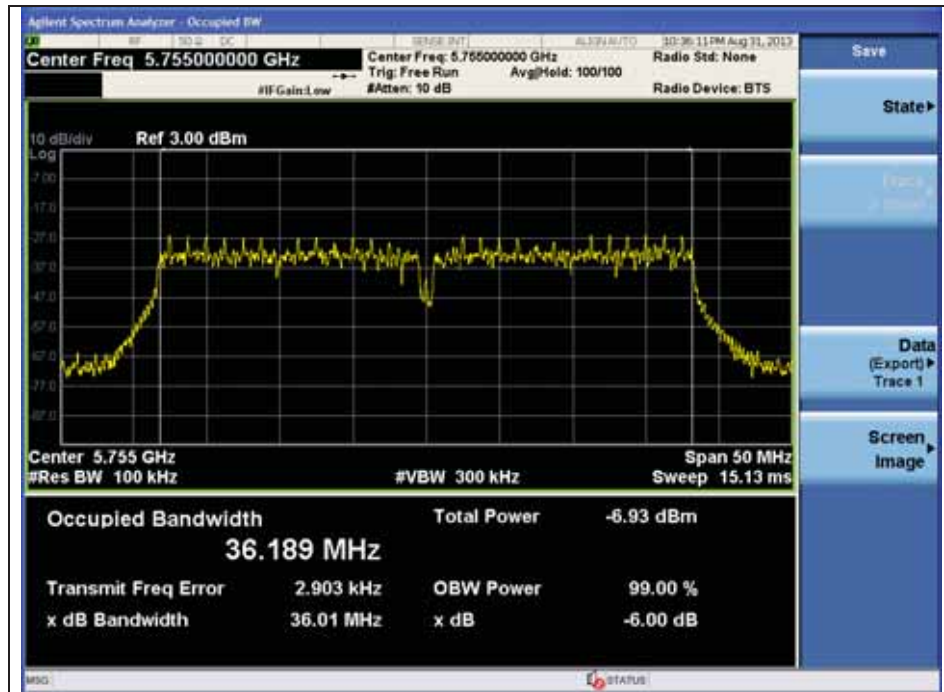


High Channel

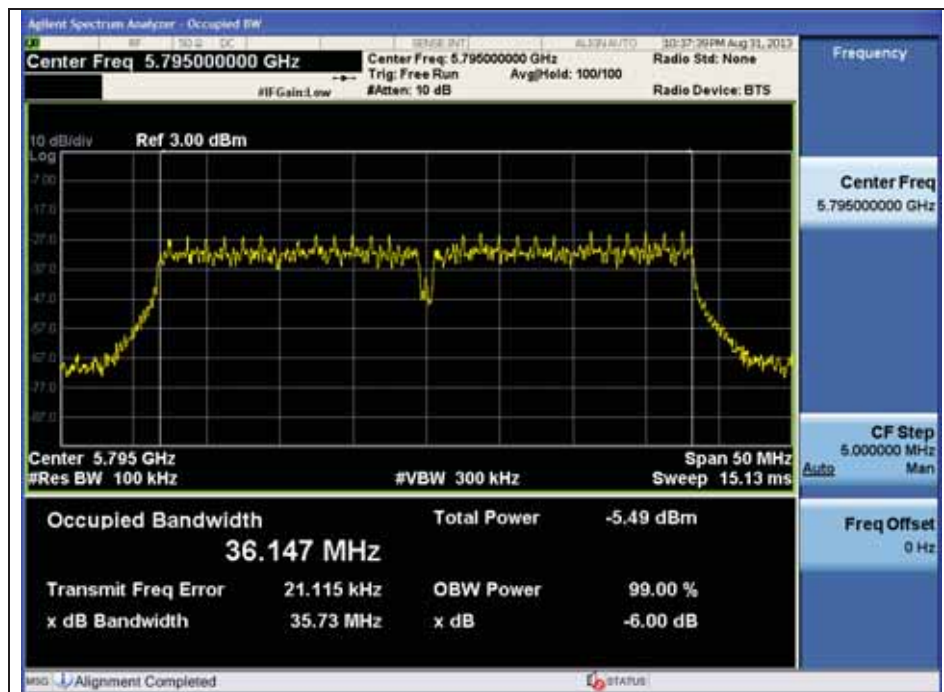

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

4. Maximum Peak Output Power Measurement

4.1. Test Setup

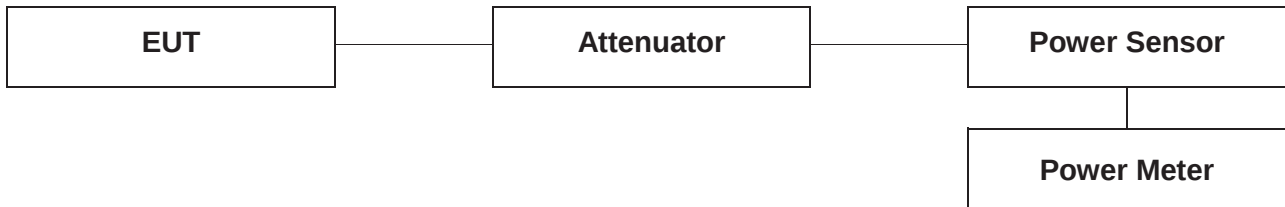

4.2. Limit

According to §15.247(b)(3), for systems using digital modulation in the 902 ~ 928 MHz, 2 400 ~ 2 483.5 MHz, and 5 725 ~ 5 850 MHz band: 1 Watt. As an alternative to a peak power measurement, compliance with the one watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antenna elements. The average must not include any intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

According to §15.247(b)(4), the conducted output power limit specified in paragraph(b) of this section is based on the use of antenna with directional gains that do not exceed 6 dBi. Except as shown in paragraph(c) of this section, if transmitting antenna of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraph (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6dBi.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

4.3. Test Procedure

All data rates and modes were investigated for this test. The full data for the worst case data rate are reported in this section.

The test follows section 9.1.3 & 9.2.3 of FCC KDB Publication 558074_v03r01

- Peak power meter method

-The maximum peak conducted output power can be measured using a broad band peak RF power meter. The power meter must have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast, average-responding diode type detector.

- Average power meter method

- Measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the conditions listed below are satisfied.

- 1) The EUT is configured to transmit continuously, or to transmit with a constant duty factor.
- 2) At all times when the EUT is transmitting, it shall be transmitting at its maximum power control level.
- 3) The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.

If the transmitter does not transmit continuously, measure the duty cycle (x) of the transmitter output signal as described in Section 6.0 of KDB 558074_v03r01.

Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the broadband power meter and power sensor. The power sensor employs a VBW = 65 MHz which is greater than the DTS bandwidth
3. Measure peak & average power each channel.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

4.4. Test Results

Ambient temperature : (24 ± 2) °C
Relative humidity : 47 % R.H.

- 802.11b

Channel Frequency (MHz)	Channel No.	Data Rate (Mbps)	Measured Power	
			Average Power (dB m)	Peak Power (dB m)
2412	1	1	14.97	17.15
		2	14.77	17.10
		5.5	14.54	16.89
		11	14.29	16.78
2437	6	1	14.81	17.62
		2	14.73	17.57
		5.5	14.67	17.49
		11	14.62	17.44
2462	11	1	14.75	17.59
		2	14.65	17.50
		5.5	14.59	17.31
		11	14.51	17.21

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

- 802.11g

Channel Frequency (MHz)	Channel No.	Data Rate (Mbps)	Measured Power	
			Average Power (dB m)	Peak Power (dB m)
2412	1	6	10.75	20.89
		9	10.73	20.88
		12	10.70	20.84
		18	10.66	20.83
		24	10.64	20.79
		36	10.60	20.77
		48	10.57	20.72
		54	10.53	20.67
2437	6	6	10.22	20.24
		9	10.20	20.21
		12	10.16	20.16
		18	10.13	20.11
		24	10.09	20.08
		36	10.06	20.04
		48	10.04	19.99
		54	10.01	19.98
2462	11	6	10.79	20.79
		9	10.74	20.74
		12	10.71	20.71
		18	10.66	20.67
		24	10.62	20.63
		36	10.58	20.59
		48	10.57	20.56
		54	10.52	20.51

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

- 802.11n_HT20

Channel Frequency (MHz)	Channel No.	Data Rate (Mbps)	Measured Power (Ant 0)		Measured Power (Ant 1)		Combined Power (Ant 0 + Ant 1)	
			Average Power (dB m)	Peak Power (dB m)	Average Power (dB m)	Peak Power (dB m)	Average Power (dB m)	Peak Power (dB m)
2412	1	MCS8	6.28	15.32	6.31	15.33	9.31	18.34
		MCS9	6.23	15.28	6.27	15.29	9.26	18.30
		MCS10	6.21	15.26	6.23	15.27	9.23	18.28
		MCS11	6.17	15.22	6.19	15.23	9.19	18.24
		MCS12	6.13	15.18	6.16	15.20	9.16	18.20
		MCS13	6.11	15.16	6.14	15.18	9.14	18.18
		MCS14	6.08	15.13	6.13	15.17	9.12	18.16
		MCS15	6.05	15.12	6.08	15.14	9.08	18.14
2437	6	MCS8	6.06	16.08	6.14	16.09	9.11	19.10
		MCS9	6.04	16.07	6.11	16.06	9.09	19.08
		MCS10	6.02	16.03	6.09	16.04	9.07	19.05
		MCS11	6.00	16.01	6.04	16.02	9.03	19.03
		MCS12	5.95	15.98	6.01	16.01	8.99	19.01
		MCS13	5.92	15.93	5.97	15.97	8.96	18.96
		MCS14	5.89	15.92	5.96	15.92	8.94	18.93
		MCS15	5.85	15.90	5.95	15.90	8.91	18.91
2462	11	MCS8	6.25	16.14	6.37	16.23	9.32	19.20
		MCS9	6.23	16.09	6.35	16.20	9.30	19.16
		MCS10	6.21	16.08	6.30	16.18	9.27	19.14
		MCS11	6.16	16.05	6.25	16.14	9.22	19.11
		MCS12	6.15	16.01	6.20	16.10	9.19	19.07
		MCS13	6.12	16.00	6.15	16.08	9.15	19.05
		MCS14	6.11	15.96	6.11	16.07	9.12	19.03
		MCS15	6.07	15.94	6.08	16.05	9.09	19.01

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

- 802.11n_HT40

Channel Frequency (MHz)	Channel No.	Data Rate (Mbps)	Measured Power (Ant 0)		Measured Power (Ant 1)		Combined Power (Ant 0 + Ant 1)	
			Average Power (dB m)	Peak Power (dB m)	Average Power (dB m)	Peak Power (dB m)	Average Power (dB m)	Peak Power (dB m)
2422	3	MCS8	6.25	16.31	6.21	16.27	9.24	19.30
		MCS9	6.22	16.29	6.18	16.22	9.21	19.27
		MCS10	6.17	16.24	6.15	16.20	9.17	19.23
		MCS11	6.16	16.23	6.13	16.16	9.16	19.21
		MCS12	6.12	16.20	6.12	16.11	9.13	19.17
		MCS13	6.09	16.18	6.09	16.07	9.10	19.14
		MCS14	6.05	16.15	6.04	16.03	9.06	19.10
		MCS15	6.04	16.13	6.00	16.00	9.03	19.08
2437	6	MCS8	6.51	16.47	6.38	16.45	9.46	19.47
		MCS9	6.46	16.44	6.35	16.42	9.42	19.44
		MCS10	6.44	16.42	6.33	16.41	9.40	19.43
		MCS11	6.41	16.38	6.28	16.36	9.36	19.38
		MCS12	6.38	16.35	6.25	16.35	9.33	19.36
		MCS13	6.37	16.33	6.23	16.33	9.31	19.34
		MCS14	6.33	16.32	6.22	16.28	9.29	19.31
		MCS15	6.29	16.31	6.21	16.26	9.26	19.30
2452	9	MCS8	6.57	16.64	6.52	16.63	9.56	19.65
		MCS9	6.56	16.63	6.50	16.60	9.54	19.63
		MCS10	6.51	16.59	6.48	16.59	9.51	19.60
		MCS11	6.46	16.54	6.47	16.55	9.48	19.56
		MCS12	6.45	16.51	6.43	16.52	9.45	19.53
		MCS13	6.40	16.47	6.39	16.51	9.41	19.50
		MCS14	6.35	16.45	6.34	16.46	9.36	19.47
		MCS15	6.32	16.40	6.31	16.42	9.33	19.42

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

- 802.11a

Channel Frequency (MHz)	Channel No.	Data Rate (Mbps)	Measured Power	
			Average Power (dB m)	Peak Power (dB m)
5745	149	6	10.81	19.51
		9	10.76	19.48
		12	10.72	19.45
		18	10.69	19.42
		24	10.65	19.39
		36	10.63	19.34
		48	10.61	19.33
		54	10.57	19.29
5785	157	6	10.53	21.03
		9	10.51	20.98
		12	10.50	20.96
		18	10.49	20.94
		24	10.45	20.93
		36	10.44	20.88
		48	10.40	20.87
		54	10.38	20.83
5825	165	6	9.72	19.92
		9	9.67	19.89
		12	9.62	19.88
		18	9.61	19.87
		24	9.59	19.84
		36	9.56	19.81
		48	9.54	19.76
		54	9.51	19.75

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

- 802.11n_HT20

Channel Frequency (MHz)	Channel No.	Data Rate (Mbps)	Measured Power (Ant 0)		Measured Power (Ant 1)		Combined Power (Ant 0 + Ant 1)	
			Average Power (dB m)	Peak Power (dB m)	Average Power (dB m)	Peak Power (dB m)	Average Power (dB m)	Peak Power (dB m)
5745	149	MCS8	7.14	16.14	7.08	16.48	10.12	19.32
		MCS9	7.09	16.12	7.06	16.46	10.09	19.30
		MCS10	7.05	16.08	7.04	16.45	10.06	19.28
		MCS11	7.01	16.05	7.02	16.43	10.03	19.25
		MCS12	6.98	16.02	6.99	16.38	10.00	19.21
		MCS13	6.93	15.97	6.96	16.37	9.96	19.18
		MCS14	6.90	15.95	6.94	16.36	9.93	19.17
		MCS15	6.85	15.94	6.92	16.34	9.90	19.15
5785	157	MCS8	6.54	15.14	6.49	14.79	9.53	17.98
		MCS9	6.53	15.13	6.48	14.78	9.52	17.97
		MCS10	6.52	15.09	6.44	14.73	9.49	17.92
		MCS11	6.50	15.05	6.39	14.69	9.46	17.88
		MCS12	6.49	15.03	6.35	14.66	9.43	17.86
		MCS13	6.46	15.02	6.31	14.61	9.40	17.83
		MCS14	6.42	14.99	6.29	14.56	9.37	17.79
		MCS15	6.40	14.97	6.24	14.54	9.33	17.77
5825	165	MCS8	6.27	14.27	6.25	16.05	9.27	18.26
		MCS9	6.26	14.22	6.24	16.03	9.26	18.23
		MCS10	6.21	14.19	6.23	16.02	9.23	18.21
		MCS11	6.17	14.16	6.18	15.97	9.19	18.17
		MCS12	6.16	14.13	6.15	15.93	9.17	18.13
		MCS13	6.13	14.11	6.14	15.90	9.15	18.11
		MCS14	6.10	14.10	6.09	15.86	9.11	18.08
		MCS15	6.09	14.06	6.06	15.85	9.09	18.06

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

- 802.11n_HT40

Channel Frequency (MHz)	Channel No.	Data Rate (Mbps)	Measured Power (Ant 0)		Measured Power (Ant 1)		Combined Power (Ant 0 + Ant 1)	
			Average Power (dB m)	Peak Power (dB m)	Average Power (dB m)	Peak Power (dB m)	Average Power (dB m)	Peak Power (dB m)
5755	151	MCS8	6.79	16.19	6.74	16.34	9.78	19.28
		MCS9	6.76	16.17	6.73	16.32	9.76	19.26
		MCS10	6.73	16.16	6.71	16.30	9.73	19.24
		MCS11	6.69	16.13	6.67	16.29	9.69	19.22
		MCS12	6.67	16.08	6.64	16.26	9.67	19.18
		MCS13	6.65	16.03	6.60	16.22	9.64	19.14
		MCS14	6.61	15.99	6.58	16.18	9.61	19.10
		MCS15	6.58	15.97	6.54	16.15	9.57	19.07
5795	159	MCS8	7.01	16.91	7.02	15.92	10.03	19.45
		MCS9	7.00	16.89	7.01	15.89	10.02	19.43
		MCS10	6.96	16.88	6.97	15.87	9.98	19.41
		MCS11	6.92	16.85	6.94	15.82	9.94	19.38
		MCS12	6.89	16.80	6.93	15.78	9.92	19.33
		MCS13	6.85	16.77	6.92	15.77	9.90	19.31
		MCS14	6.81	16.75	6.91	15.73	9.87	19.28
		MCS15	6.78	16.73	6.86	15.70	9.83	19.26

Remark

According to KDB662911, peak power of each port (ANT0 and ANT1) was combined by using below calculation.

ANT0+ANT1 (Calculated)


Power: $10\log\{10^{(\text{Ant0_Average Power}/10)} + 10^{(\text{Ant1_Average Power}/10)}\}$

In case of the Data Rate, record the Data Rate of the worst case

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

5. Power Spectral Density Measurement

5.1. Test Setup



5.2. Limit

§15.247(e) For digitally modulated system, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dB m in any 3 kHz band any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

5.3. Test Procedure

All data rates and modes were investigated for this test. The full data for the worst case data rate are reported in this section.

The measurements are recorded using the PKPSD measurement procedure in section 10.2 of KDB 558074_v03r01.

1. Use this procedure when the maximum conducted output power in the fundamental emission is used to demonstrate compliance. The EUT must be configured to transmit continuously at full power over the measurement duration.
2. Set analyzer center frequency to DTS channel center frequency.
3. Set the span to at least 1.5 times the DTS channel bandwidth.
4. Set the RBW to : $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$
5. Set the VBW $\geq 3 \times \text{RBW}$
6. Detector = Peak
7. Sweep time = auto couple.
8. Trace mode = max hold.
9. Allow trace to fully stabilize.
10. Use the peak marker function to determine the maximum amplitude level within the RBW.
11. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

5.4. Test Results

Ambient temperature : (24 ± 2) °C
Relative humidity : 47 % R.H.

- ANT0

Operation Mode	Data Rate (Mbps)	Channel	Frequency (MHz)	Measured PSD (dB m)	Maximum Limit (dB m)
DSSS (802.11b)	1	Low	2 412	-6.87	8
		Middle	2 437	-6.72	8
		High	2 462	-6.53	8
OFDM (802.11g)	6	Low	2 412	-0.34	8
		Middle	2 437	-0.10	8
		High	2 462	-0.46	8
OFDM (802.11a)	6	Low	5 745	-4.56	8
		Middle	5 785	-4.49	8
		High	5 825	-4.29	8

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

- ANT0 + ANT1(Calculated)

Operation Mode	Data Rate (Mbps)	Channel	Frequency (MHz)	Ant0_PSD (dB m)	Ant1_PSD (dB m)	Ant0 +Ant1 Result (dB m)	Limit (dB m)
OFDM (802.11n_HT20)	MCS8	Low	2 412	-1.643	-0.274	2.106	8
		Middle	2 437	-1.614	-0.293	2.107	8
		High	2 462	-1.479	-0.403	2.103	8
OFDM (802.11n_HT40)	MCS8	Low	2 422	-2.420	-3.410	0.123	8
		Middle	2 437	-2.568	-3.060	0.203	8
		High	2 452	-3.052	-3.014	-0.023	8
OFDM (802.11n_HT20)	MCS8	Low	5 745	-8.272	-8.391	-5.321	8
		Middle	5 785	-8.744	-8.775	-5.749	8
		High	5 825	-8.591	-8.514	-5.542	8
OFDM (802.11n_HT40)	MCS8	Low	5 755	-10.829	-11.006	-7.906	8
		High	5 795	-10.846	-11.260	-8.038	8

Note;

- Ant0+Ant1 (Calculated)
- Result PSD : $10 \cdot \log\{10^{(\text{Ant0_Measured PSD}/10)} + 10^{(\text{Ant1_Measured PSD}/10)}\}$
- In case of the Data Rate, record the Data Rate of the worst case

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

ANT0

2.4 GHz

802.11b

Low channel



Middle channel



The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


High channel




The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

802.11g

Low channel

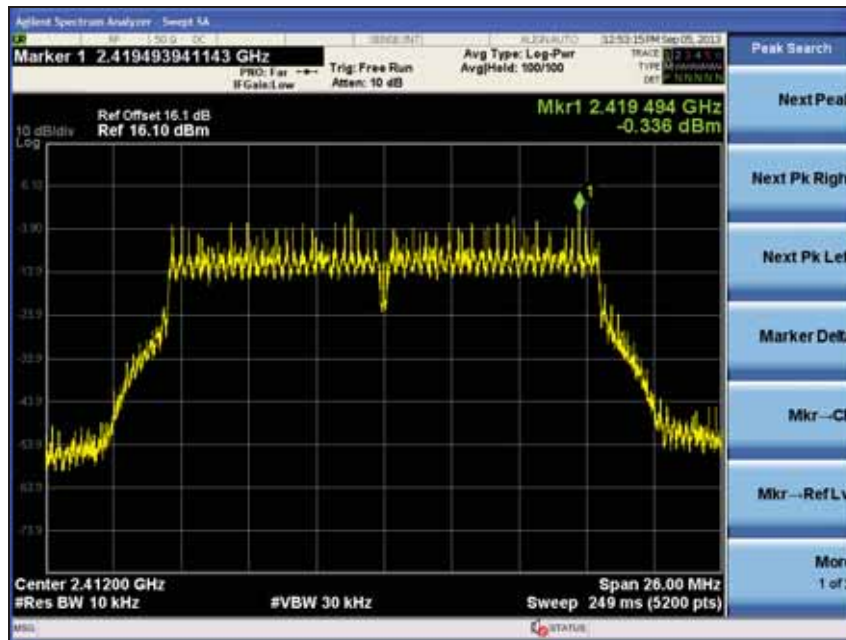


Middle channel

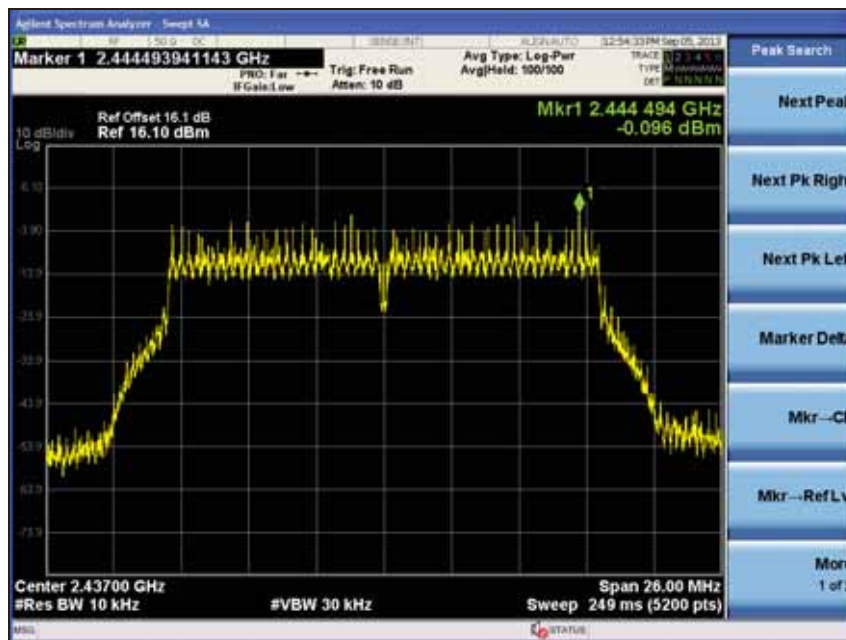

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


High channel

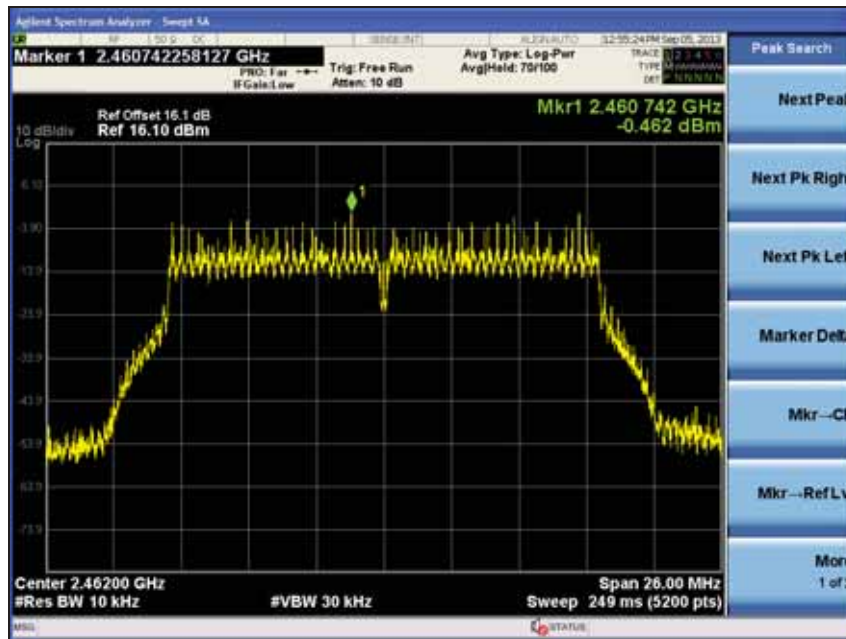


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

802.11n_HT20(MCS8)

Low channel

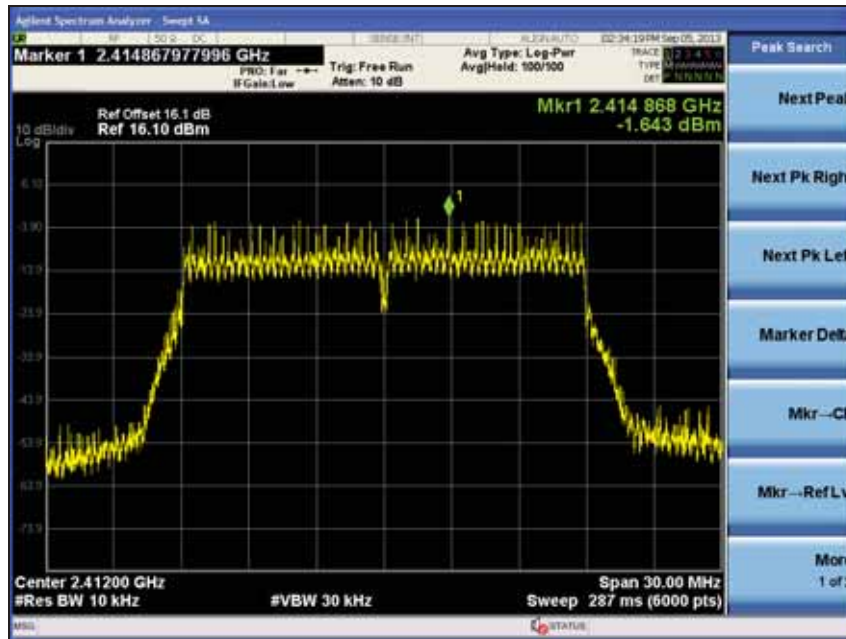


Middle channel

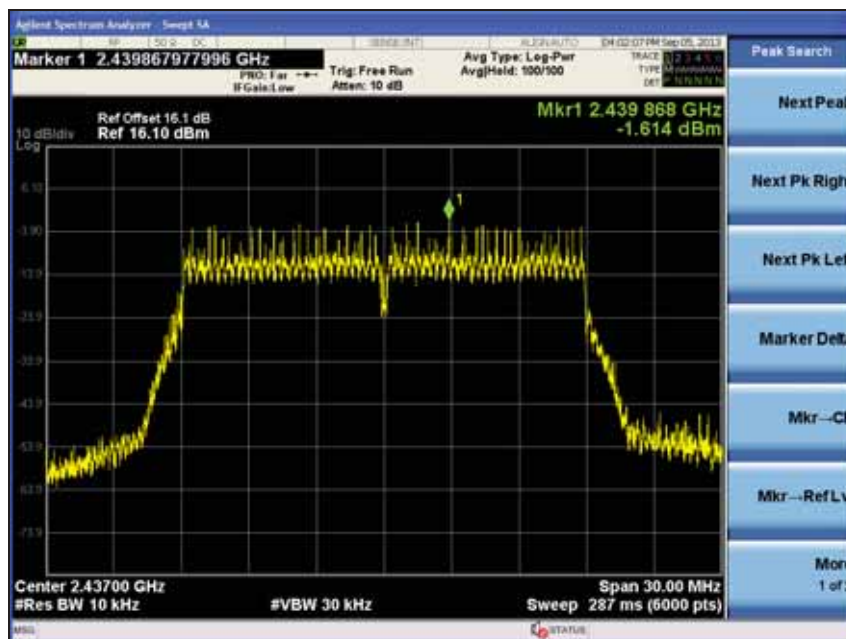

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


High channel

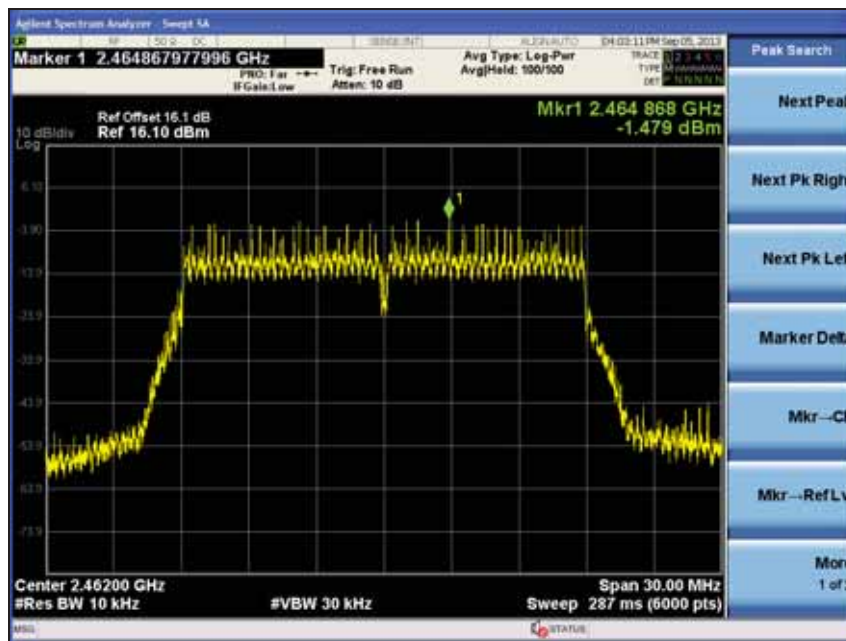


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

802.11n_HT40(MCS8)

Low channel

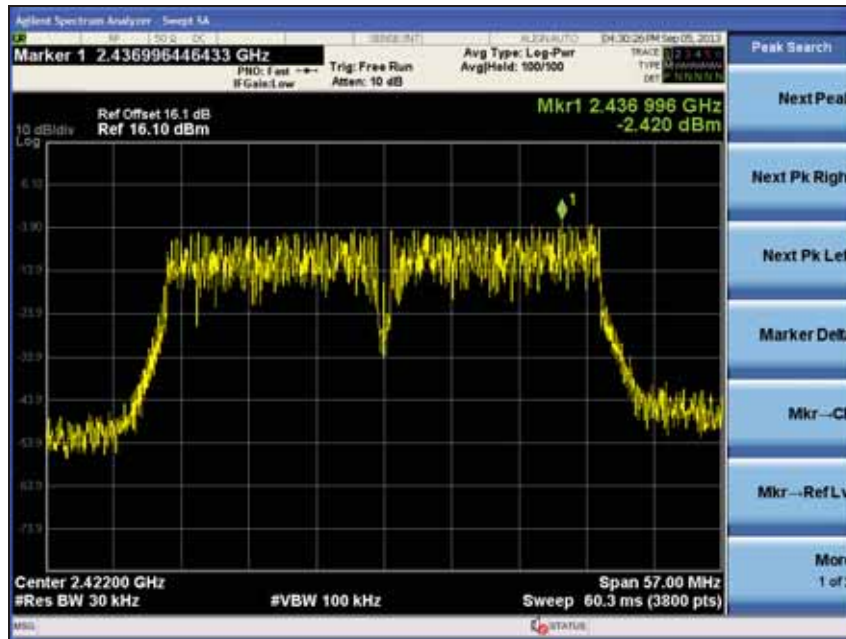


Middle channel

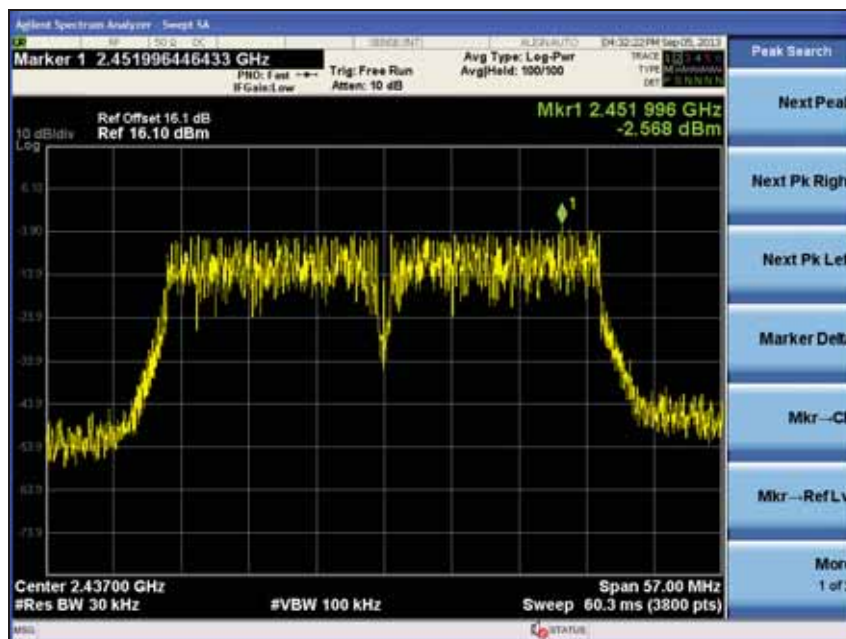

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

High channel

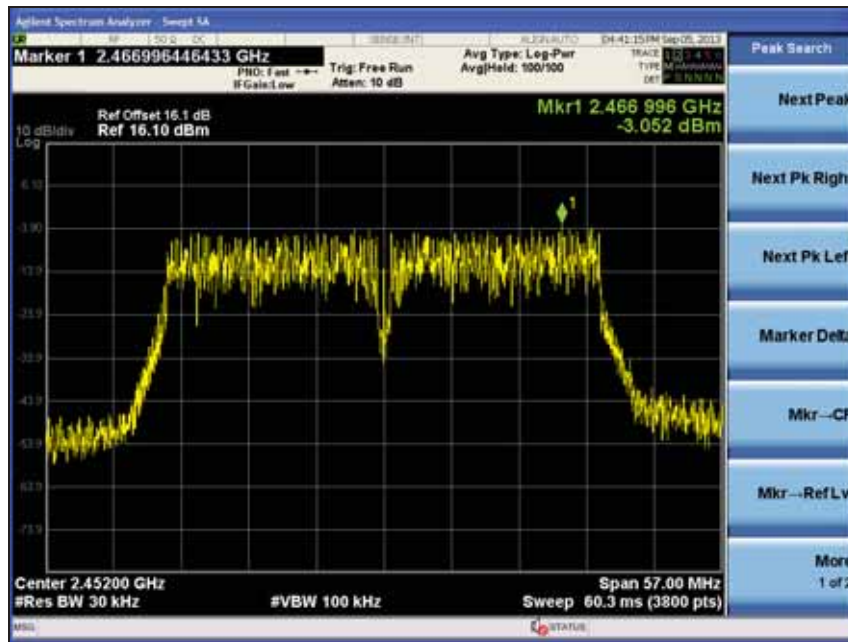


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


5.8 GHz

802.11a

Low channel

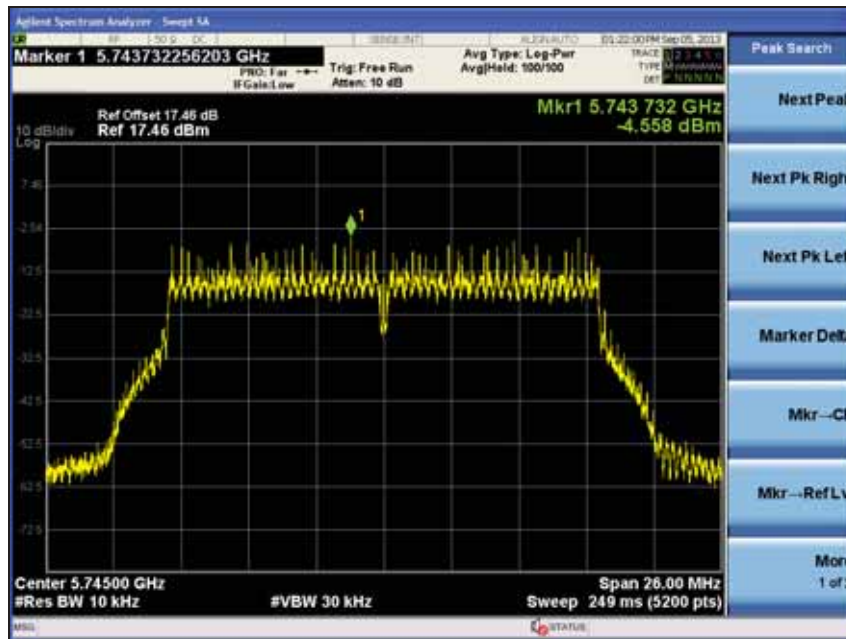


Middle channel

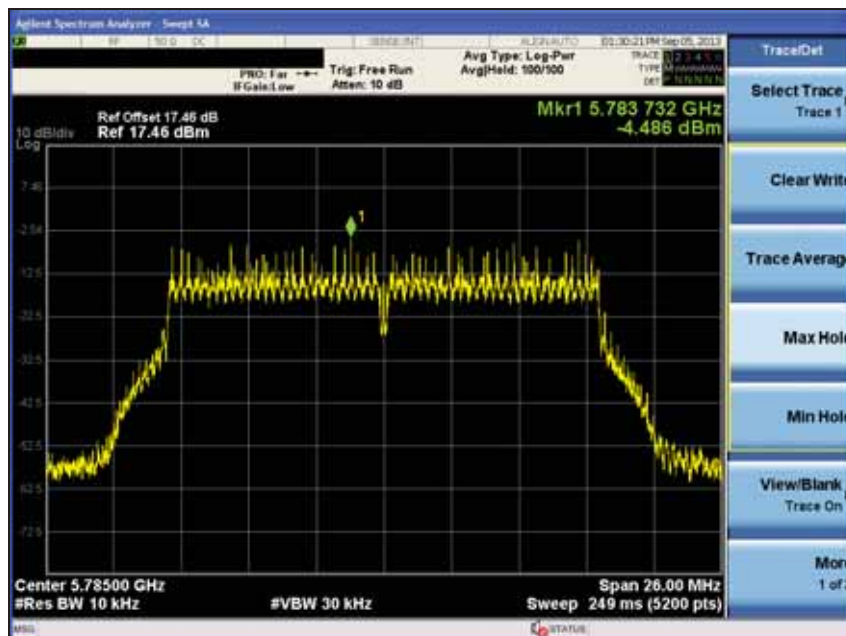

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


High channel

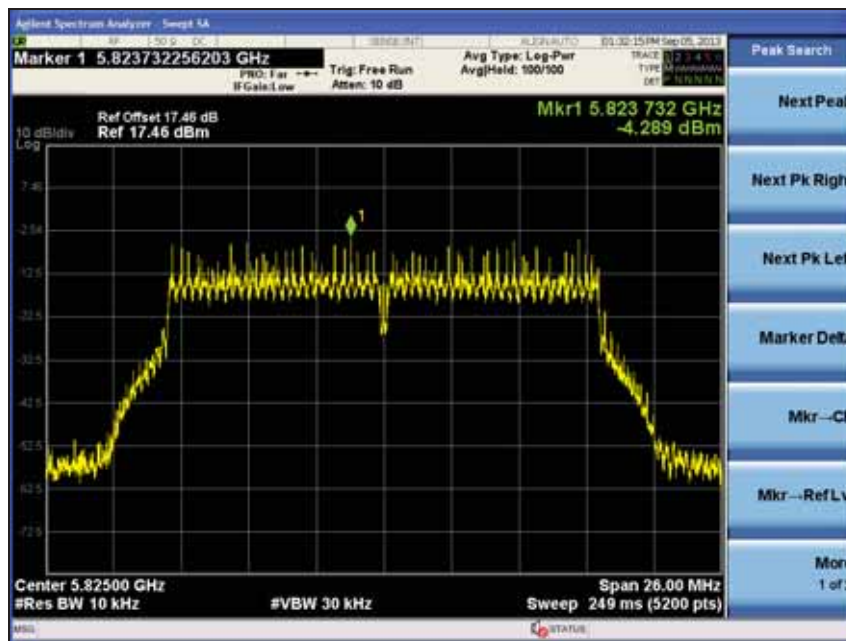


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

802.11n_HT20(MCS8)

Low channel

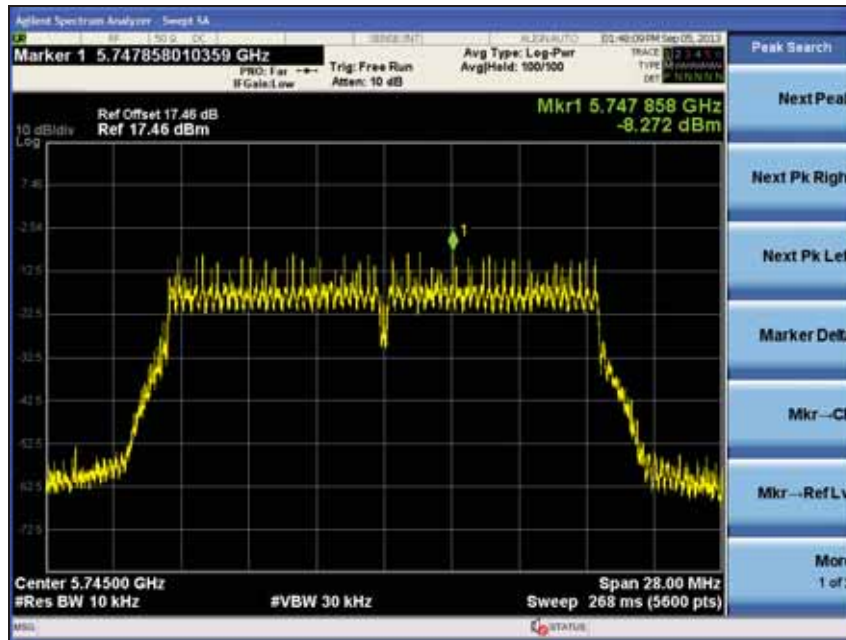


Middle channel

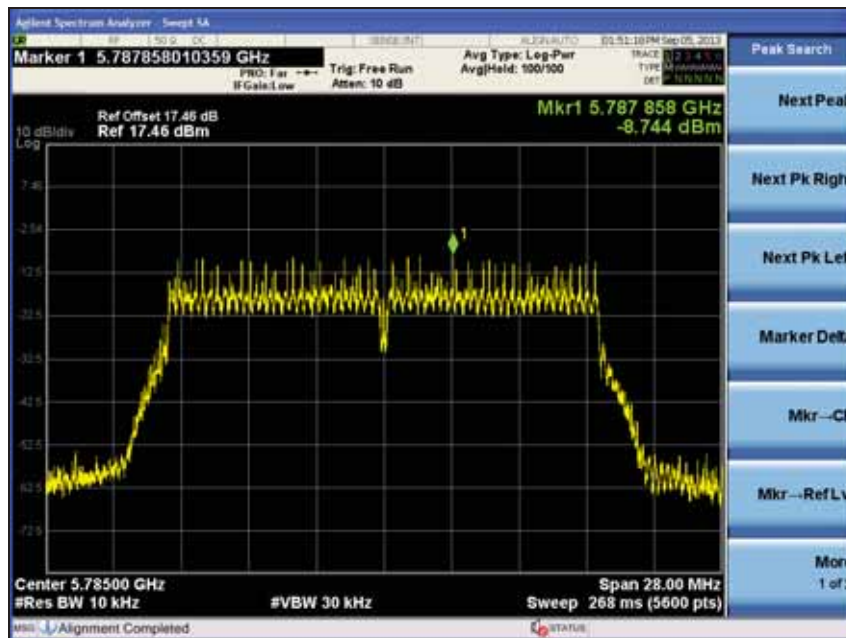

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


High channel

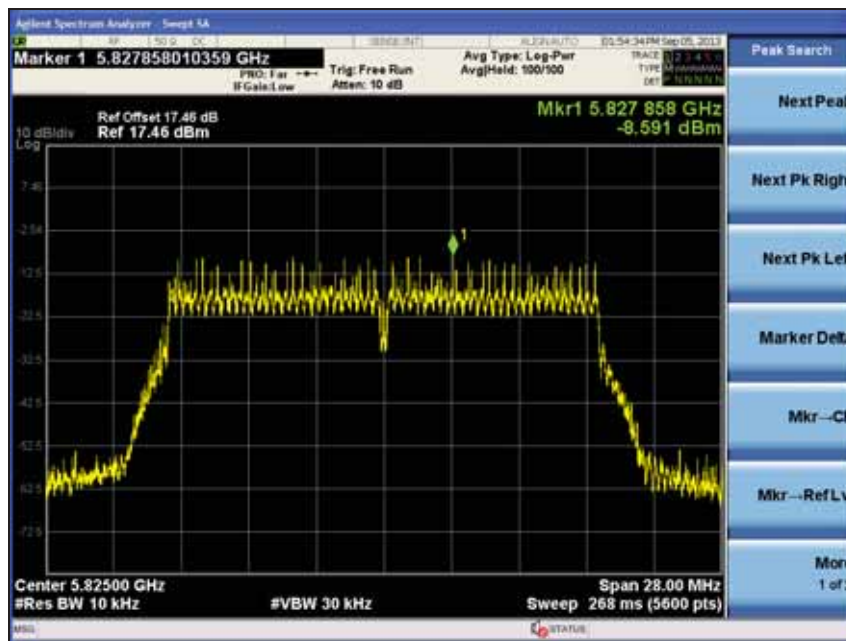


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

802.11n_HT40(MCS8)

Low channel

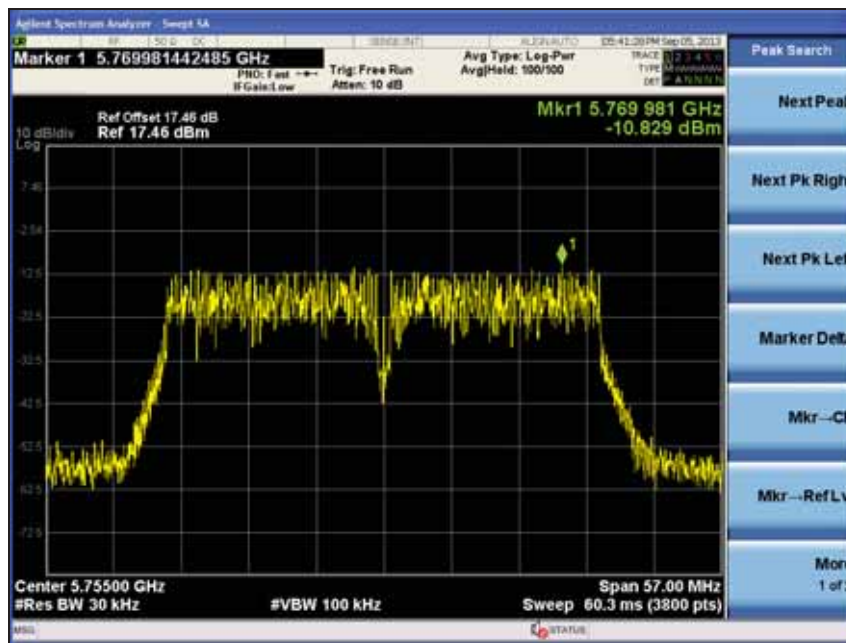

High channel

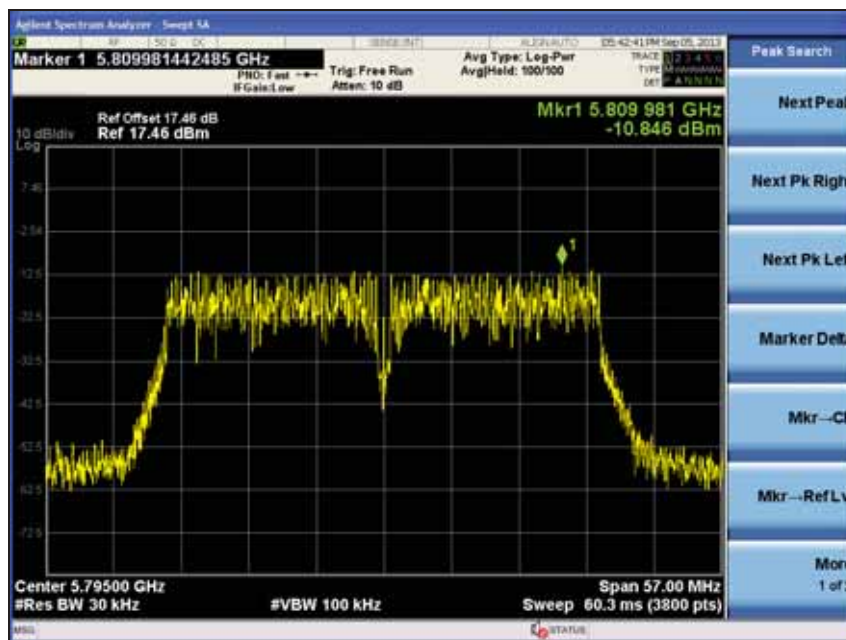


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

ANT1


2.4 GHz

802.11n_HT20(MCS8)

Low channel

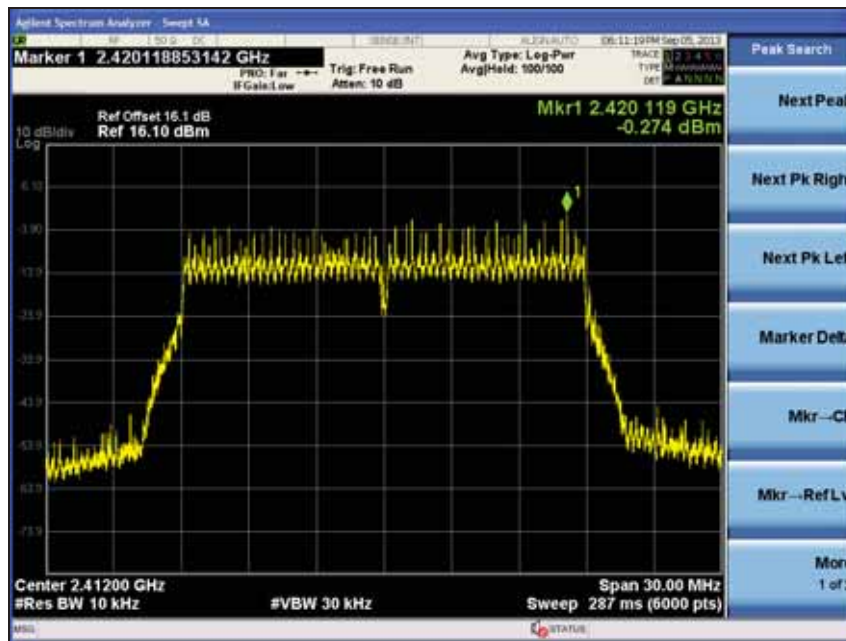


Middle channel

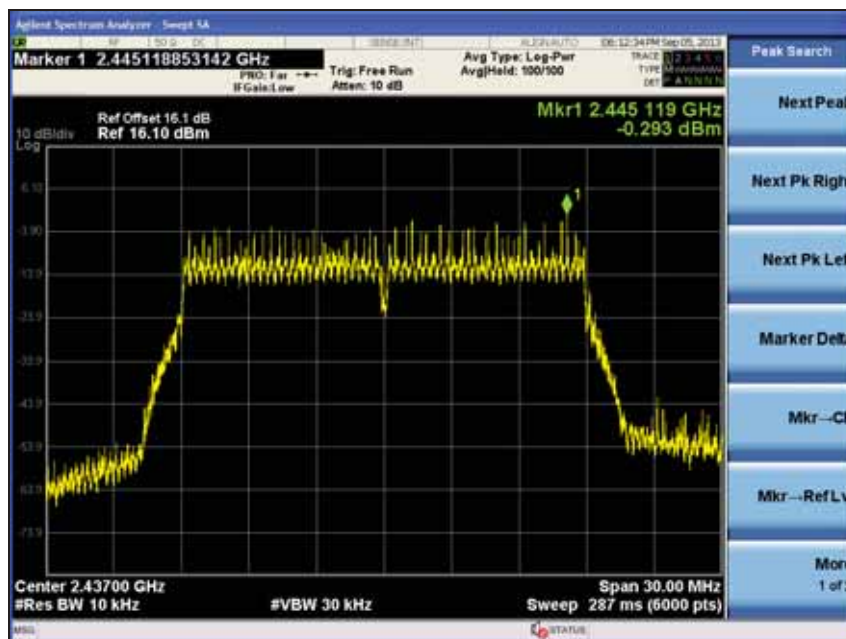

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


High channel

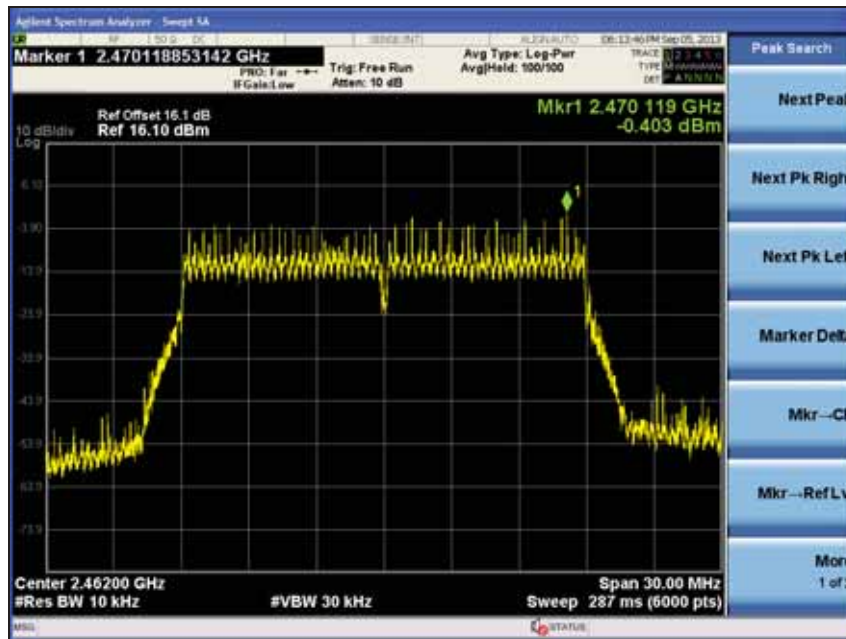


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

802.11n_HT40(MCS8)

Low channel

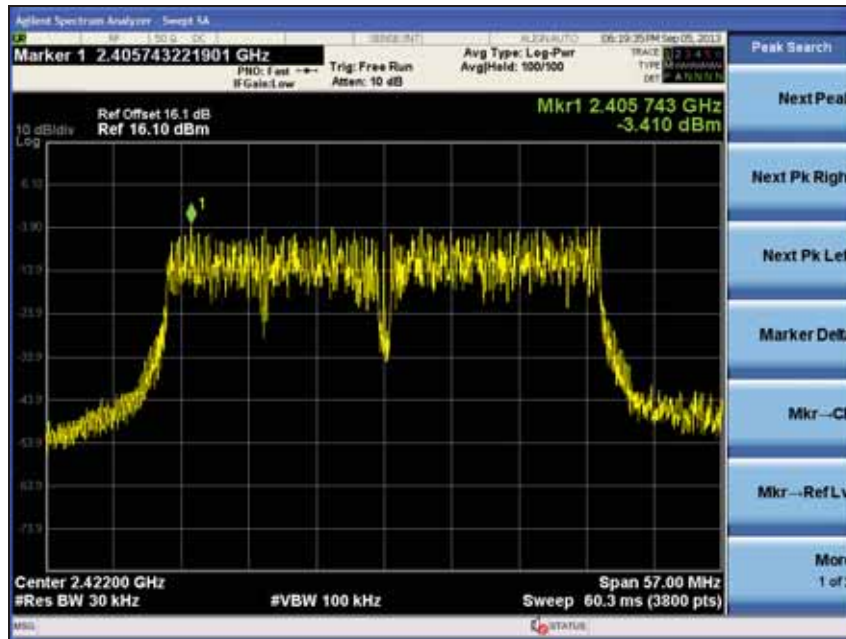


Middle channel

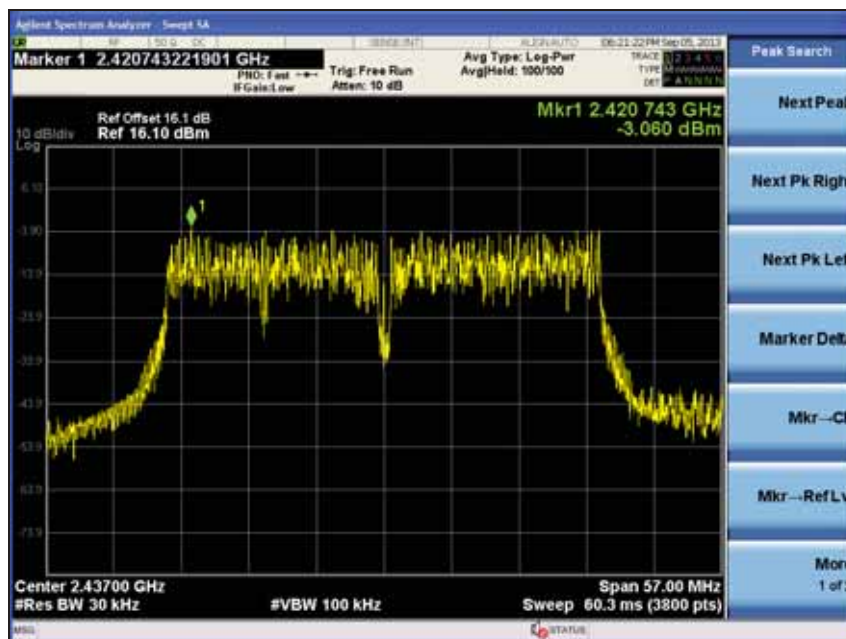

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

High channel

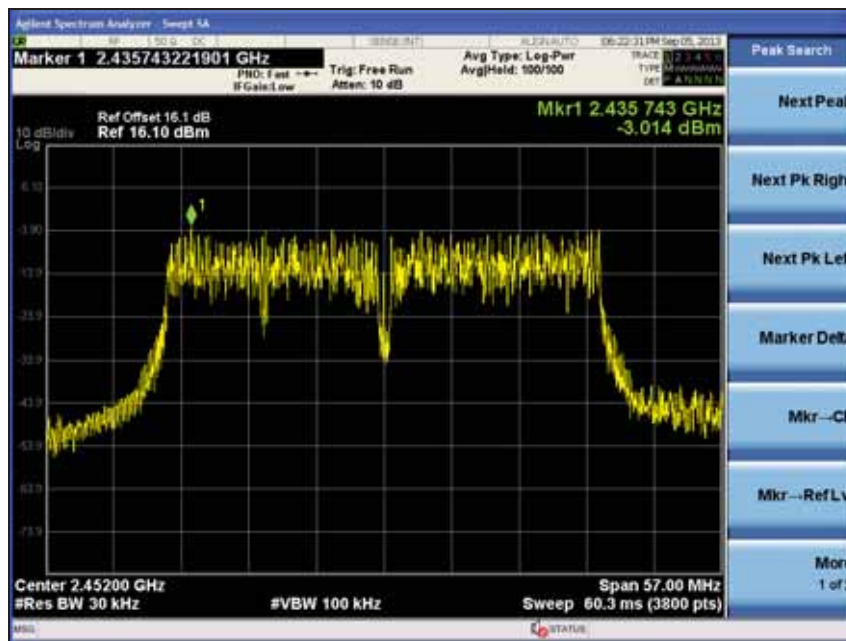


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


5.8 GHz

802.11n_HT20(MCS8)

Low channel

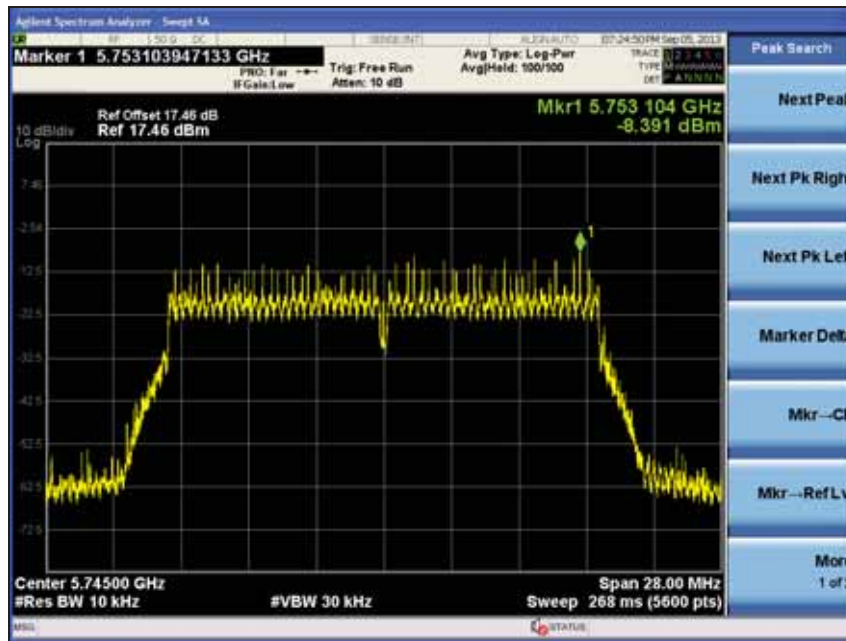


Middle channel

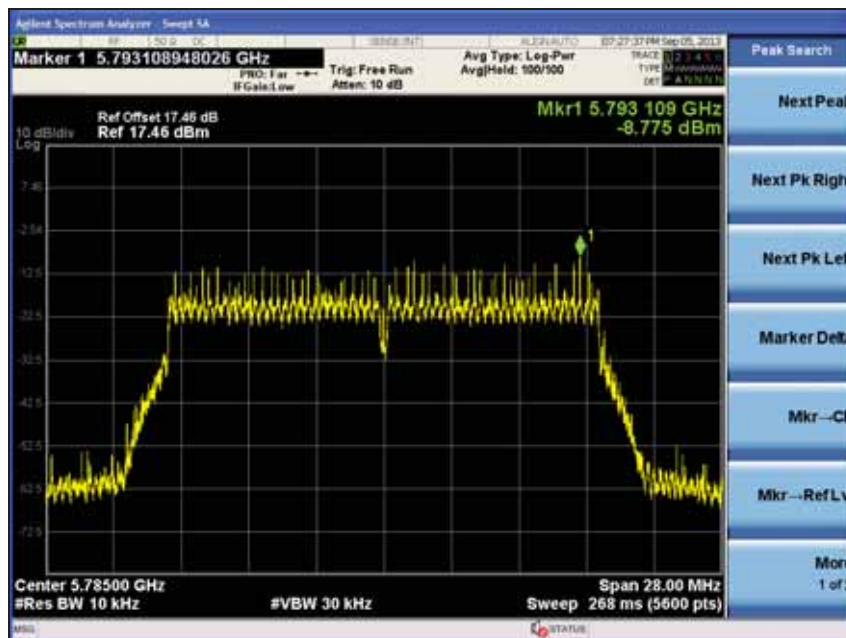

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


High channel

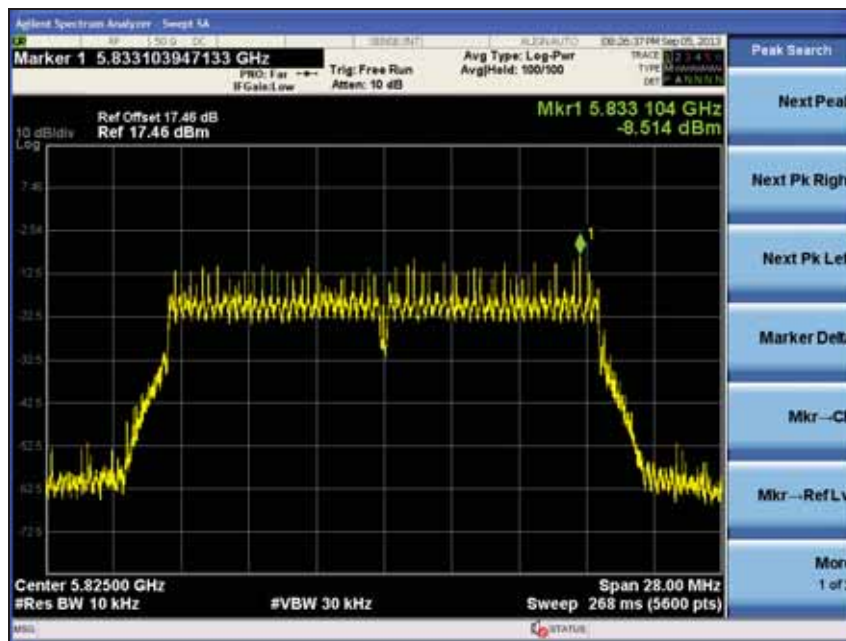


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

802.11n_HT40(MCS8)

Low channel

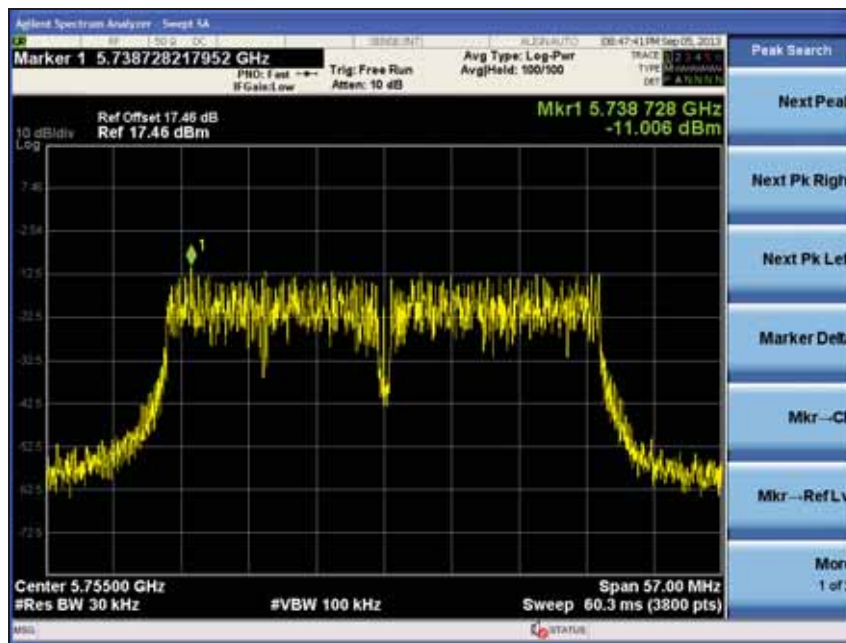


High channel

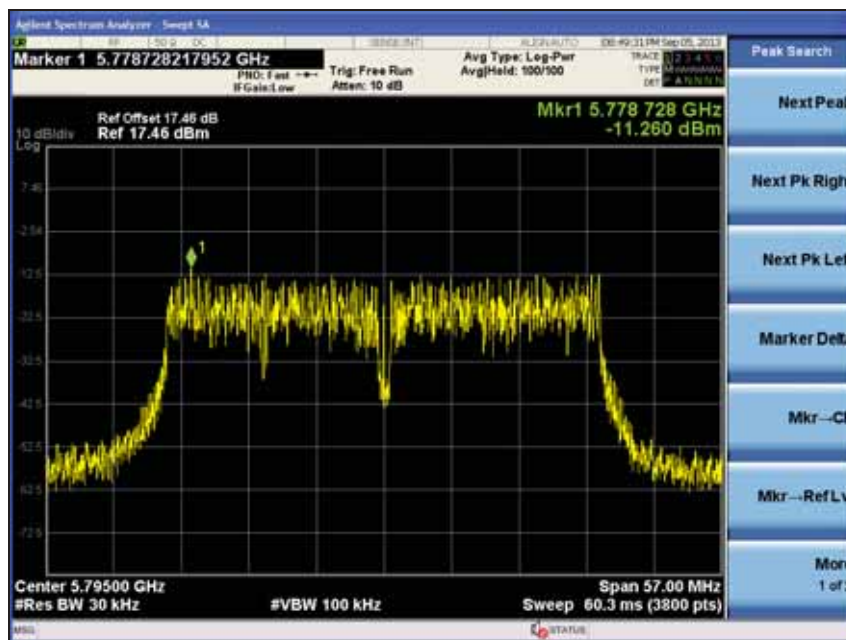

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

6. Transmitter AC Power Line Conducted Emission

6.1. Test Setup

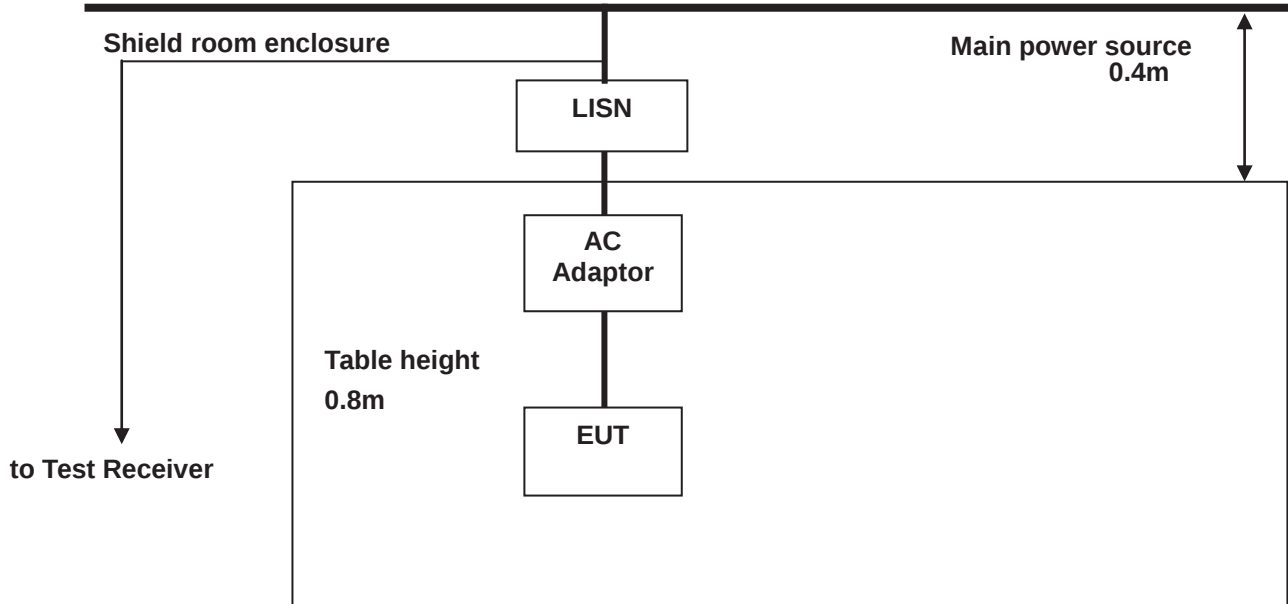

6.2. Limit

According to §15.207(a) for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 uH/50 ohm line impedance stabilization network(LISN).

Compliance with the provision of this paragraph shall on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower applies at the boundary between the frequency ranges.

Frequency of Emission (MHz)	Conducted limit (dBμV)	
	Quasi-peak	Average
0.15 – 0.50	66 - 56*	56 - 46*
0.50 – 5.00	56	46
5.00 – 30.0	60	50

* Decreases with the logarithm of the frequency.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

6.3. Test Procedures

All data rates and modes were investigated for this test. The full data for the worst case data rate are reported in this section.

AC line conducted emissions from the EUT were measured according to the dictates of ANSI C63.4-2003

1. The test procedure is performed in a 6.5m × 3.6m × 3.6m (L × W × H) shielded room. The EUT along with its peripherals were placed on a 1.0 m(W) × 1.5 m(L) and 0.8 m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane.
2. The EUT was connected to power mains through a line impedance stabilization network (LISN) which provides 50 ohm coupling impedance for measuring instrument and the chassis ground was bounded to the horizontal ground plane of shielded room.
3. The excess power cable between the EUT and the LISN was bundled. All connecting cables of EUT were moved to find the maximum emission.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

6.4. Test Results (Worst case configuration_11n mode_MCS0)

The following table shows the highest levels of conducted emissions on both phase of Hot and Neutral line.

Ambient temperature : (24 ± 2) °C
Relative humidity : 47 % R.H.

Frequency range : 0.15 MHz – 30 MHz
Measured Bandwidth : 9 kHz

FREQ. (MHz)	LEVEL(dB μ V)		LINE	LIMIT(dB μ V)		MARGIN(dB)	
	Q-Peak	Average		Q-Peak	Average	Q-Peak	Average
0.18	57.13	40.43	H	64.49	54.49	7.36	14.06
0.24	42.43	37.93	H	62.10	52.10	19.67	14.17
0.45	45.53	32.83	H	56.88	46.88	11.35	14.05
2.81	44.79	33.49	H	56.00	46.00	11.21	12.51
14.36	49.23	44.13	H	60.00	50.00	10.77	5.87
19.06	50.85	45.25	H	60.00	50.00	9.15	4.75
0.18	56.91	41.91	N	64.35	54.35	7.44	12.44
0.24	53.21	38.61	N	61.96	51.96	8.75	13.35
0.43	47.61	35.51	N	57.21	47.21	9.60	11.70
3.27	45.15	34.55	N	56.00	46.00	10.85	11.45
15.36	51.50	46.00	N	60.00	50.00	8.50	4.00
18.79	51.33	45.43	N	60.00	50.00	8.67	4.57


Note ;

1. Line (H): Hot, Line (N): Neutral
2. All modes of operation were investigated and the worst-case emissions are reported using 11n_MCS0
3. The limit for Class B device(s) from 150 kHz to 30 MHz are specified in Section of the Title 47 CFR.
4. Traces shown in plot mad using a peak detector and average detector
5. Deviations to the Specifications: None.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


Plots of Conducted Power line

Test mode : (Hot)

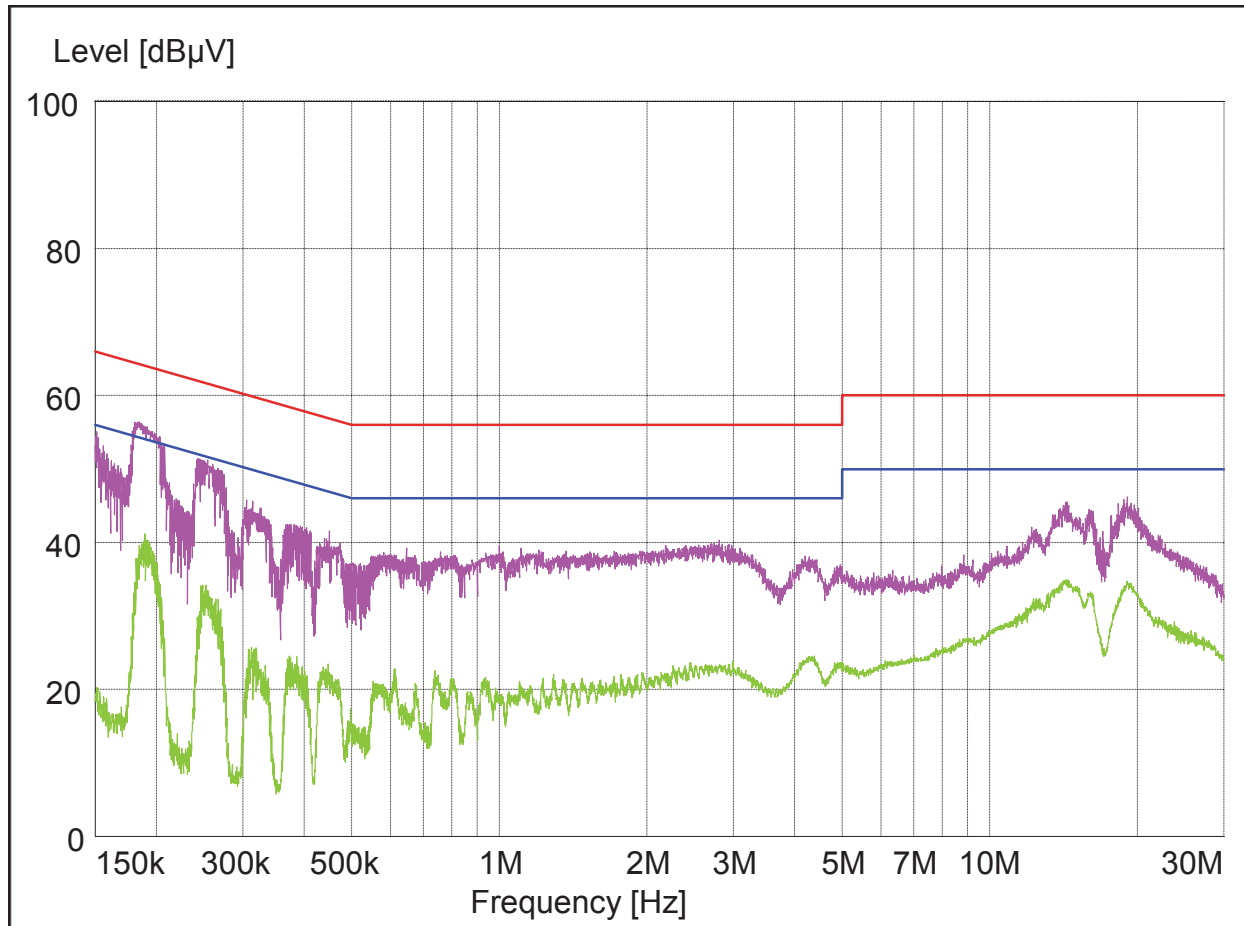

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Test mode : (Neutral)

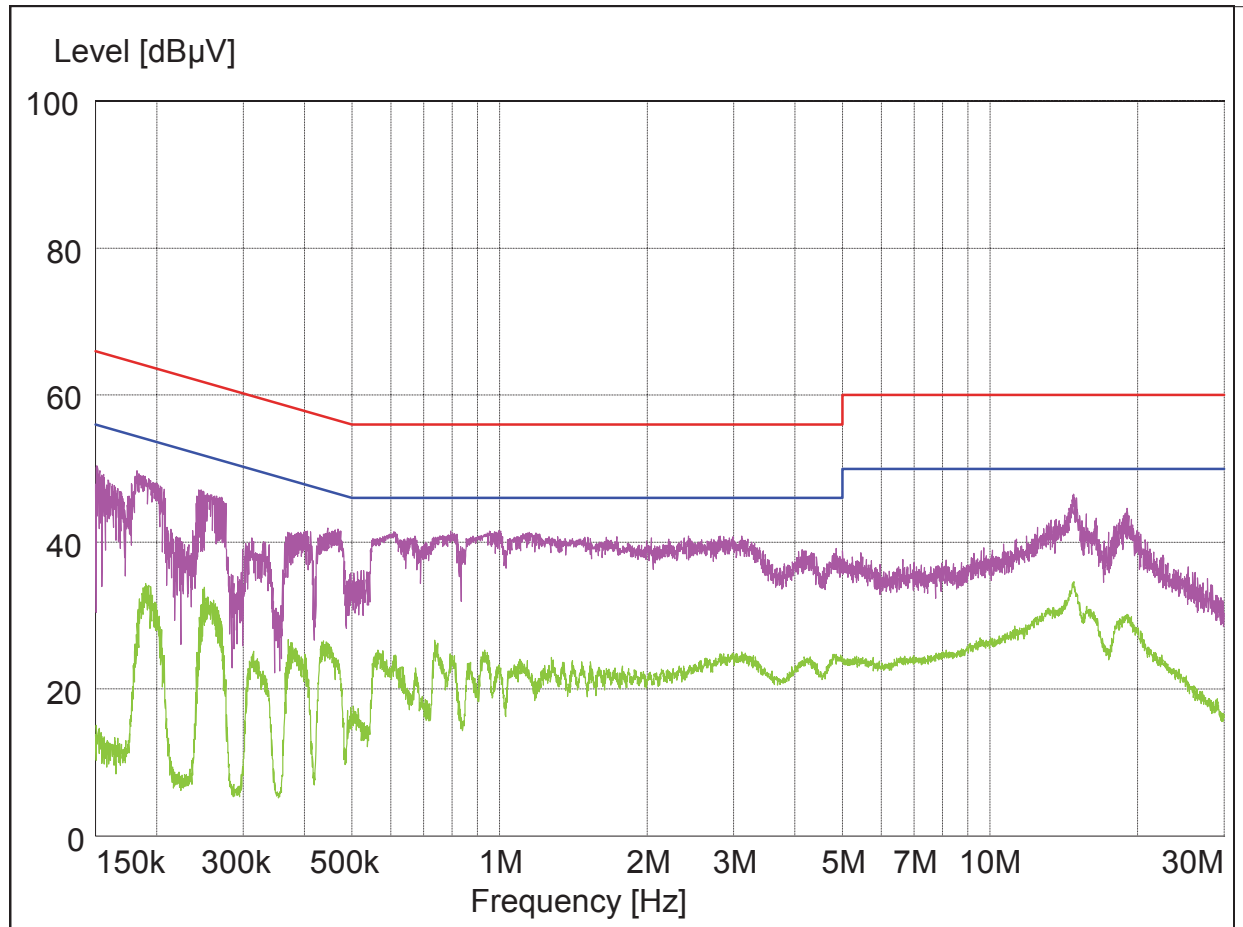

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

7. Antenna Requirement

7.1. Standard Applicable

For intentional device, according to FCC 47 CFR Section §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section §15.247 (b) if transmitting antennas of directional gain greater than 6 dB i are used, the power shall be reduced by the amount in dB that the gain of the antenna exceeds 6 dB i.

7.2. Antenna Connected Construction

The antenna used of this product is the internal antenna and peak max gain of each antennas as below .

The peak max gain of each antennas ANT0 & ANT1 and calculated antenna gain of ANT0+ANT1 are as below :

Antenna	11b/g/n	11a/n
ANT0	-2.60	-1.88
ANT1	-1.99	-3.08
ANT0+ANT1 (Calculated)	0.72	0.55

Formula

$$- \text{ANT0+ANT1 (Calculated)} = 10\log \left[\{10^{(\text{ANTB}/20)} + 10^{(\text{ANTC}/20)}\}^2 / 2 \right]$$

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.