



**FCC 47 CFR PART 15 SUBPART C  
INDUSTRY CANADA RSS-210 ISSUE 8**

**CERTIFICATION TEST REPORT  
FOR  
Notebook with Bluetooth/BLE and 802.11a/b/g/n/ac**

**MODEL NUMBER: XE503C12**

**FCC ID: A3LXE503C12**

**IC ID: 649E-XE503C12**

**REPORT NUMBER: 14U17027-1**

**ISSUE DATE: FEBRUARY 22, 2014**

*Prepared for*

**SAMSUNG ELECTRONICS CO., LTD.  
416, MAETAN 3-DONG, YEONGTONG-GU  
SUWON-CITY, GYEONGGI-DO 443-742, SOUTH KOREA**

*Prepared by*

**UL VERIFICATION SERVICES INC.  
47173 BENICIA STREET  
FREMONT, CA 94538, U.S.A.  
TEL: (510) 771-1000  
FAX: (510) 661-0888**



**NVLAP LAB CODE 200065-0**

Revision History

| <u>Rev.</u> | <u>Issue Date</u> | <u>Revisions</u> | <u>Revised By</u> |
|-------------|-------------------|------------------|-------------------|
| --          | 2/22/14           | Initial Issue    | P. Kim            |

## TABLE OF CONTENTS

|  |           |
|--|-----------|
| <b>1. ATTESTATION OF TEST RESULTS</b> .....            | <b>5</b>  |
| <b>2. TEST METHODOLOGY</b> .....                       | <b>6</b>  |
| <b>3. FACILITIES AND ACCREDITATION</b> .....           | <b>6</b>  |
| <b>4. CALIBRATION AND UNCERTAINTY</b> .....            | <b>6</b>  |
| 4.1. <i>MEASURING INSTRUMENT CALIBRATION</i> .....     | 6         |
| 4.2. <i>SAMPLE CALCULATION</i> .....                   | 6         |
| 4.3. <i>MEASUREMENT UNCERTAINTY</i> .....              | 6         |
| <b>5. EQUIPMENT UNDER TEST</b> .....                   | <b>7</b>  |
| 5.1. <i>DESCRIPTION OF EUT</i> .....                   | 7         |
| 5.2. <i>MAXIMUM OUTPUT POWER</i> .....                 | 7         |
| 5.3. <i>DESCRIPTION OF AVAILABLE ANTENNAS</i> .....    | 7         |
| 5.4. <i>WORST-CASE CONFIGURATION AND MODE</i> .....    | 7         |
| 5.5. <i>DESCRIPTION OF TEST SETUP</i> .....            | 8         |
| <b>6. TEST AND MEASUREMENT EQUIPMENT</b> .....         | <b>10</b> |
| <b>7. SUMMARY TABLE</b> .....                          | <b>11</b> |
| <b>8. ANTENNA PORT TEST RESULTS</b> .....              | <b>12</b> |
| 8.1. <i>20 dB AND 99% BANDWIDTH</i> .....              | 12        |
| 8.1.1. <i>BASIC DATA RATE GFSK MODULATION</i> .....    | 12        |
| 8.1.1. <i>ENHANCED DATA RATE 8PSK MODULATION</i> ..... | 12        |
| 8.2. <i>HOPPING FREQUENCY SEPARATION</i> .....         | 21        |
| 8.3. <i>NUMBER OF HOPPING CHANNELS</i> .....           | 23        |
| 8.4. <i>AVERAGE TIME OF OCCUPANCY</i> .....            | 26        |
| 8.5. <i>OUTPUT POWER</i> .....                         | 30        |
| 8.5.1. <i>BASIC DATA RATE GFSK MODULATION</i> .....    | 30        |
| 8.5.2. <i>ENHANCED DATA RATE 8PSK MODULATION</i> ..... | 30        |
| 8.6. <i>AVERAGE POWER</i> .....                        | 35        |
| 8.6.1. <i>BASIC DATA RATE GFSK MODULATION</i> .....    | 35        |
| 8.6.2. <i>DATA RATE PI/4-DQPSK MODULATION</i> .....    | 35        |
| 8.6.3. <i>ENHANCED DATA RATE 8PSK MODULATION</i> ..... | 36        |
| 8.7. <i>CONDUCTED SPURIOUS EMISSIONS</i> .....         | 37        |
| 8.7.1. <i>BASIC DATA RATE GFSK MODULATION</i> .....    | 38        |
| 8.7.1. <i>ENHANCED DATA RATE 8PSK MODULATION</i> ..... | 42        |
| <b>9. RADIATED TEST RESULTS</b> .....                  | <b>46</b> |
| 9.1. <i>LIMITS AND PROCEDURE</i> .....                 | 46        |

---

|        |  |           |
|--------|--|-----------|
| 9.2.   | <i>TRANSMITTER ABOVE 1 GHz</i> .....           | 47        |
| 9.2.1. | BASIC DATA RATE GFSK MODULATION.....           | 47        |
| 9.2.2. | ENHANCED DATA RATE 8PSK MODULATION.....        | 60        |
| 9.3.   | <i>WORST-CASE BELOW 1 GHz</i> .....            | 73        |
| 10.    | <b>AC POWER LINE CONDUCTED EMISSIONS</b> ..... | <b>76</b> |
| 11.    | <b>SETUP PHOTOS</b> .....                      | <b>80</b> |

# 1. ATTESTATION OF TEST RESULTS

**COMPANY NAME:** SAMSUNG ELECTRONICS CO., LTD.  
**EUT DESCRIPTION:** Notebook with Bluetooth/BLE and 802.11a/b/g/n/ac  
**MODEL:** XE503C12  
**SERIAL NUMBER:** LC11DV2F100193A (Radiated)  
LC11DV2F100020A (Conducted)  
**DATE TESTED:** FEBRUARY 14-18, 2014

| APPLICABLE STANDARDS                    |              |
|---|--------------|
| STANDARD                                | TEST RESULTS |
| CFR 47 Part 15 Subpart C                | Pass         |
| INDUSTRY CANADA RSS-210 Issue 8 Annex 8 | Pass         |
| INDUSTRY CANADA RSS-GEN Issue 3         | Pass         |

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

**Note:** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For  
UL Verification Services Inc. By:

Tested By:



---

PHILIP KIM  
WISE PROGRAM MANAGER  
UL Verification Services Inc.

---

CHARLES VERGONIO  
WISE LAB TECHNICIAN  
UL Verification Services Inc.

## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4-2009, FCC CFR 47 Part 2, FCC CFR 47 Part 15, RSS-GEN Issue 3, and RSS-210 Issue 8.

## 3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA.

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsenc.com>.

## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

### 4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

### 4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

| PARAMETER                             | UNCERTAINTY |
|---------------------------------------|-------------|
| Conducted Disturbance, 0.15 to 30 MHz | 3.52 dB     |
| Radiated Disturbance, 30 to 18000 MHz | 4.94 dB     |

Uncertainty figures are valid to a confidence level of 95%.

## 5. EQUIPMENT UNDER TEST

### 5.1. DESCRIPTION OF EUT

The EUT is a Notebook with Bluetooth/BLE and 802.11a/b/g/n/ac.

### 5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

| Frequency Range (MHz) | Mode          | Output Power (dBm) | Output Power (mW) |
|-----------------------|---------------|--------------------|-------------------|
| 2402 - 2480           | Basic GFSK    | 8.88               | 7.73              |
| 2402 - 2480           | Enhanced 8PSK | 8.31               | 6.78              |

Note: GFSK, Pi/4-DQPSK, 8PSK average Power are all investigated, The GFSK & 8PSK Power are the worst case. Testing is based on this mode to showing compliance. For average power data please refer to section 8.6.

### 5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes an FPCB antenna, with a maximum gain of -0.78 dBi.

### 5.4. WORST-CASE CONFIGURATION AND MODE

Radiated emission and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

The fundamental of the EUT was investigated in three orthogonal orientations X,Y,Z, it was determined that X orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in X orientation.

## 5.5. DESCRIPTION OF TEST SETUP

### SUPPORT EQUIPMENT

| Support Equipment List |              |            |                          |        |
|------------------------|--------------|------------|--------------------------|--------|
| Description            | Manufacturer | Model      | Serial Number            | FCC ID |
| AC Adapter             | SAMSUNG      | A13-040N1A | CNS440002088DON8 36J00D9 | N/A    |
|                        |              |            |                          |        |

### I/O CABLES


| I/O Cable List |          |                      |                |            |                  |         |
|----------------|----------|----------------------|----------------|------------|------------------|---------|
| Cable No       | Port     | # of identical ports | Connector Type | Cable Type | Cable Length (m) | Remarks |
| 1              | DC Power | 1                    | Mini-USB       | Shielded   | 1.2m             | N/A     |
| 2              | Audio    | 1                    | Mini-Jack      | Unshielded | 1m               | N/A     |

### TEST SETUP

The EUT is continuously communicating to the Bluetooth tester during the tests. EUT was set in the Hidden menu mode to enable BT communications.



**SETUP DIAGRAM FOR TESTS**

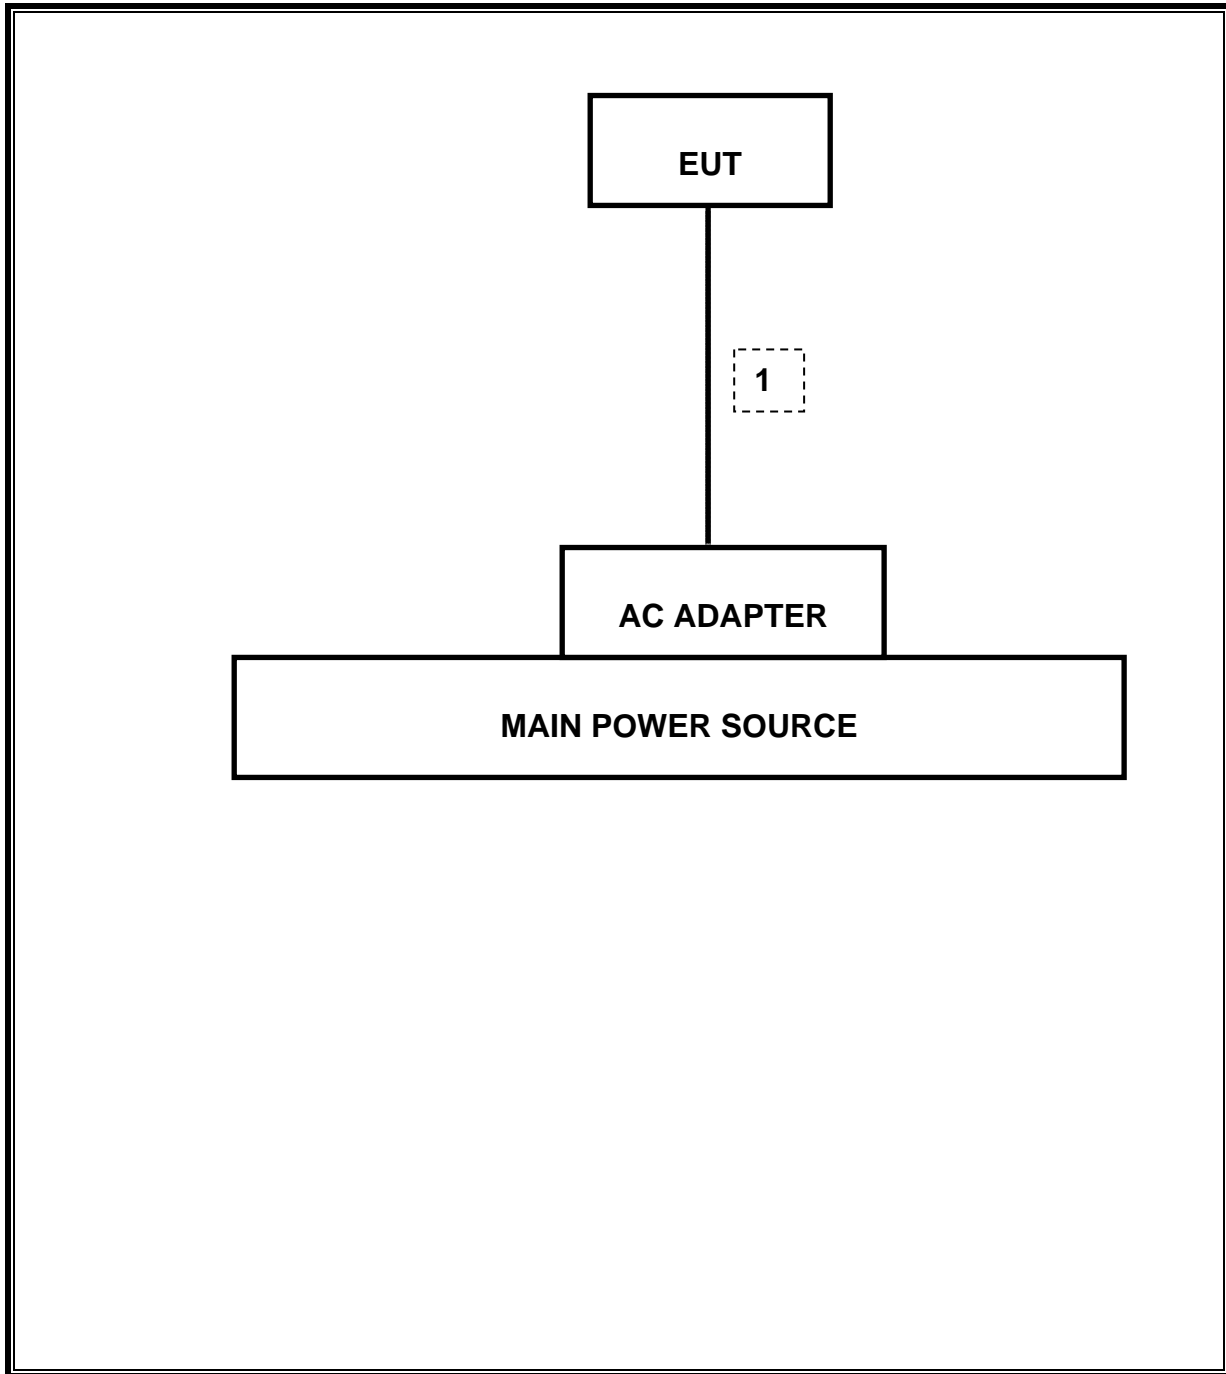

## 6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

| Test Equipment List             |                |             |        |          |          |
|---------------------------------|----------------|-------------|--------|----------|----------|
| Description                     | Manufacturer   | Model       | Asset  | Cal Date | Cal Due  |
| Antenna, Biconolog, 30MHz-1 GHz | Sunol Sciences | JB1         | C01171 | 03/23/13 | 03/13/14 |
| Antenna, Horn, 18GHz            | EMCO           | 3115        | C00783 | 10/25/13 | 10/25/14 |
| Antenna, Horn, 25.5 GHz         | ARA            | MWH-1826/B  | C00980 | 11/14/13 | 11/14/14 |
| Preamplifier, 1300 MHz          | Agilent / HP   | 8447D       | C00580 | 01/28/14 | 01/28/15 |
| Preamplifier, 26.5 GHz          | Agilent / HP   | 8449B       | C01052 | 10/22/13 | 10/22/14 |
| Spectrum Analyzer, 44 GHz       | Agilent / HP   | E4446A      | C01069 | 12/20/13 | 12/20/14 |
| CBT Bluetooth Tester            | R & S          | CBT         | None   | 07/12/13 | 07/12/14 |
| Peak Power Meter                | Agilent / HP   | E4416A      | C00963 | 12/13/13 | 12/13/14 |
| Peak / Average Power Sensor     | Agilent / HP   | E9327A      | C00964 | 12/13/13 | 12/13/14 |
| LISN, 30 MHz                    | FCC            | 50/250-25-2 | C00626 | 01/14/14 | 01/14/15 |
| Reject Filter, 2.4GHz           | Micro-Tronics  | BRM50702    | N02684 | CNR      | CNR      |
| Peak Power Meter                | Agilent / HP   | E4416A      | C00963 | 41621    | 12/13/14 |
| Peak / Average Power Sensor     | Agilent / HP   | E9327A      | C00964 | 41621    | 12/13/14 |

## 7. SUMMARY TABLE

| FCC Part Section   | RSS Section(s)                       | Test Description                        | Test Limit                            | Test Condition | Test Result | Worst Case |
|--------------------|--------------------------------------|---|---------------------------------------|----------------|-------------|------------|
| 2.1049             | RSS-GEN 4.6                          | Occupied Band width (99%)               | N/A                                   | Conducted      | Pass        | 1.2131MHz  |
| 2.1051, 15.247 (d) | RSS-210 A8.5                         | Band Edge / Conducted Spurious Emission | -20dBc                                |                | Pass        | -43.02dBm  |
| 15.247 (b)(1)      | RSS-210 A8.4                         | TX conducted output power               | <21dBm                                |                | Pass        | 8.88dBm    |
| 15.247 (a)(1)      | RSS-210 A8.1(b)                      | Hopping frequency separation            | > 25KHz                               |                | Pass        | 1MHz       |
| 15.247 (a)(1)(iii) | RSS-210 A8.1(d)                      | Number of Hopping channels              | More than 15 non-overlapping channels |                | Pass        | 79         |
| 15.247 (a)(1)(iii) | RSS-210 A8.1(d)                      | Avg Time of Occupancy                   | < 0.4sec                              |                | Pass        | 0.318sec   |
| 15.207 (a)         | RSS-GEN 7.2.2                        | AC Power Line conducted emissions       | Section 10                            | Radiated       | Pass        | 46.31dBuV  |
| 15.205, 15.209     | RSS-210 Clause 2.6, RSS-210 Clause 6 | Radiated Spurious Emission              | < 54dBuV/m                            |                | Pass        | 50.1dBuV/m |

## 8. ANTENNA PORT TEST RESULTS

### 8.1. 20 dB AND 99% BANDWIDTH

#### LIMIT

None; for reporting purposes only.

#### TEST PROCEDURE

DA 00-705: The transmitter output is connected to a spectrum analyzer. The RBW is set to  $\geq$  1% of the 20 dB bandwidth. The VBW is set to  $\geq$  RBW. The sweep time is coupled.

#### RESULTS



##### 8.1.1. BASIC DATA RATE GFSK MODULATION


| Channel | Frequency (MHz) | 20 dB Bandwidth (MHz) | 99% Bandwidth (MHz) |
|---------|-----------------|-----------------------|---------------------|
| Low     | 2402            | 0.955                 | 0.859               |
| Middle  | 2441            | 0.956                 | 0.87                |
| High    | 2480            | 0.958                 | 0.901               |
| Worst   |                 | 0.958                 | 0.901               |

##### 8.1.1. ENHANCED DATA RATE 8PSK MODULATION



| Channel | Frequency (MHz) | 20 dB Bandwidth (MHz) | 99% Bandwidth (MHz) |
|---------|-----------------|-----------------------|---------------------|
| Low     | 2402            | 1.3                   | 1.2057              |
| Middle  | 2441            | 1.3                   | 1.2131              |
| High    | 2480            | 1.299                 | 1.1728              |
| Worst   |                 | 1.3                   | 1.2131              |


**GFSK 20 dB BANDWIDTH**

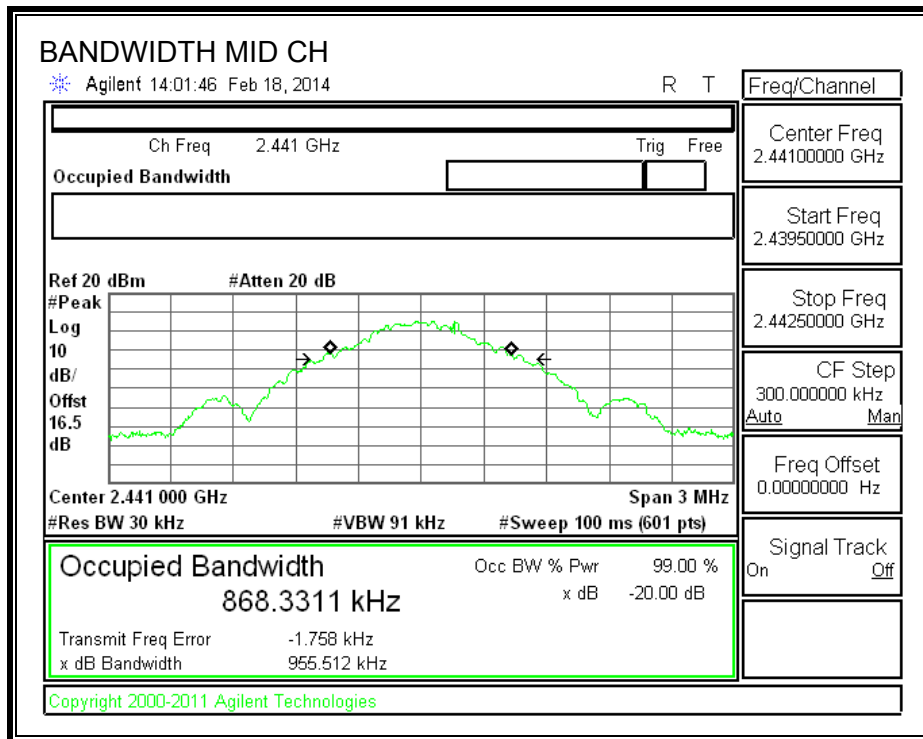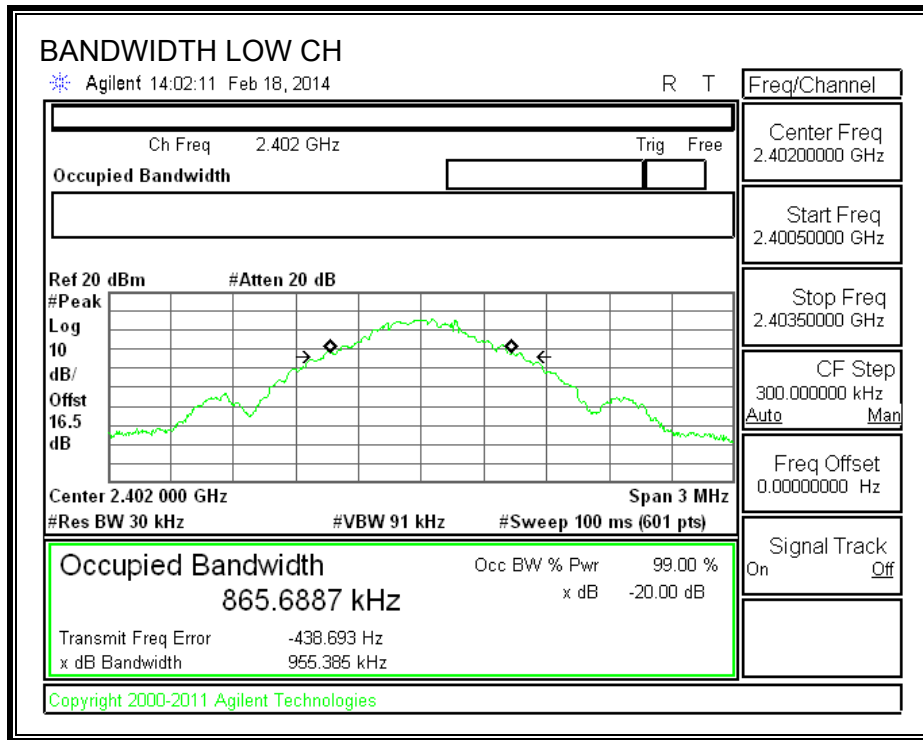

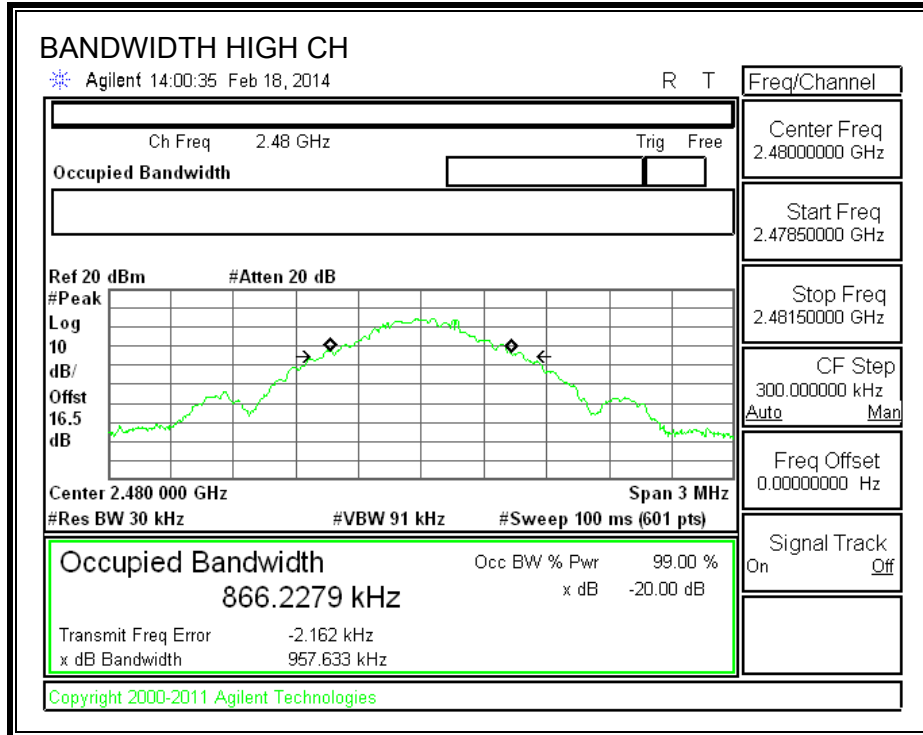



**GFSK 99% BANDWIDTH**

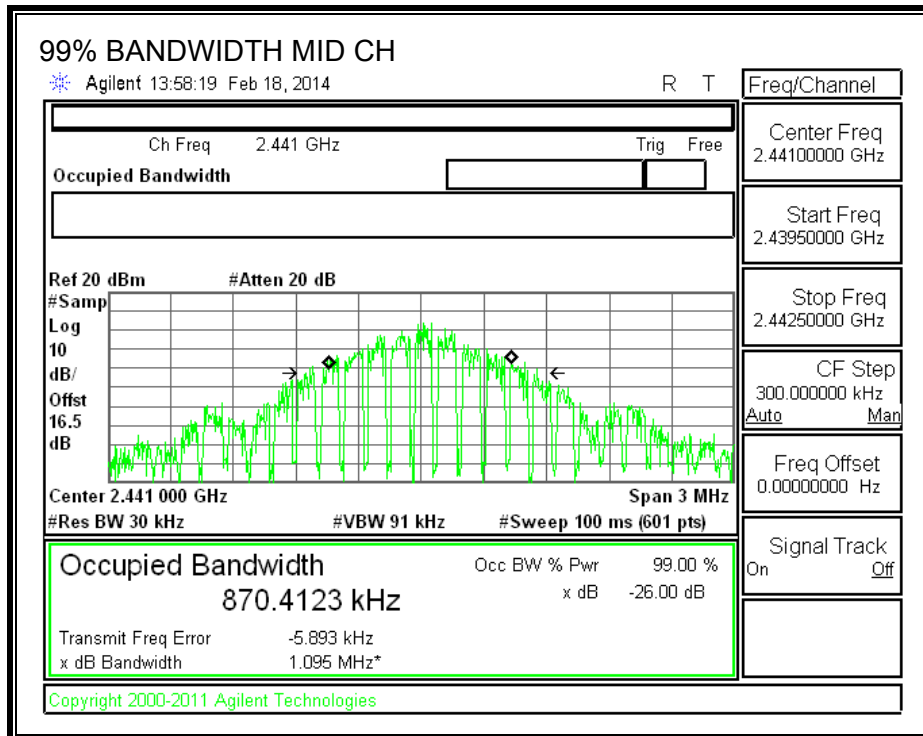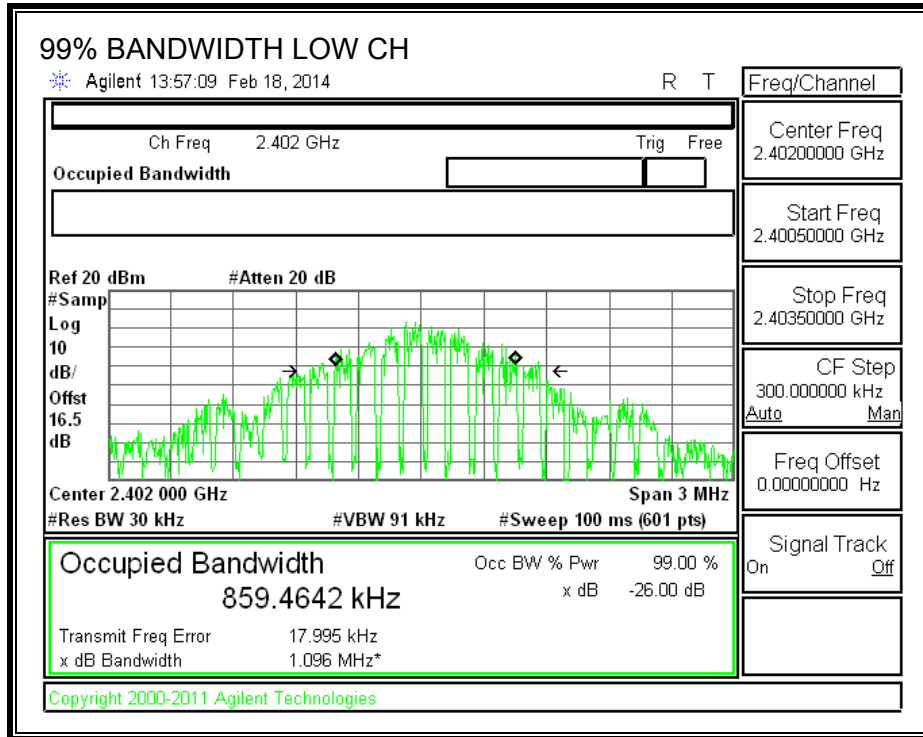


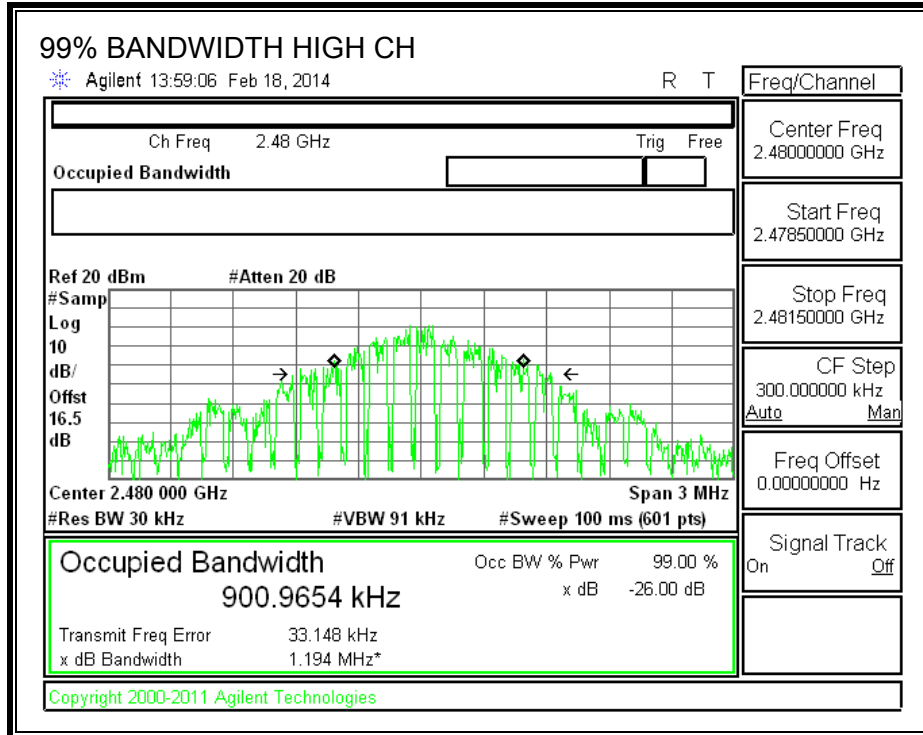






**8PSK 20 dB BANDWIDTH**

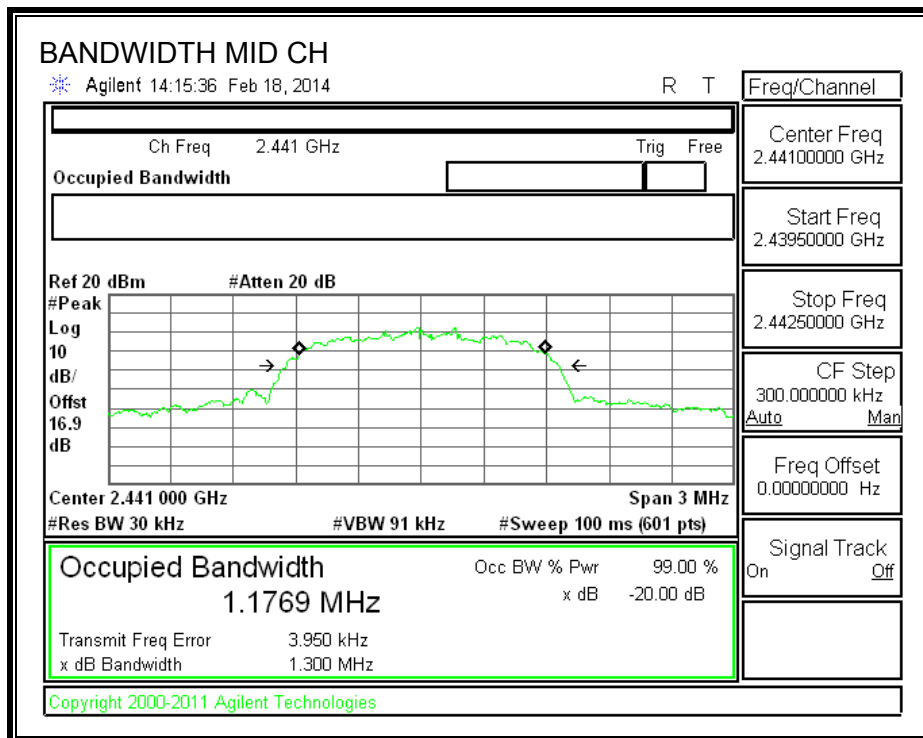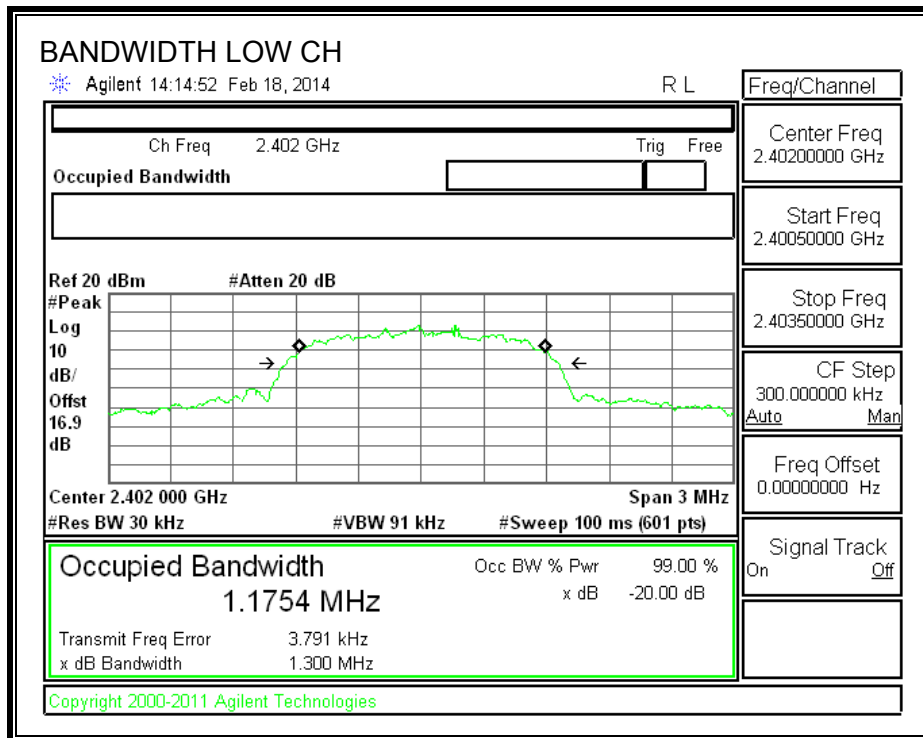

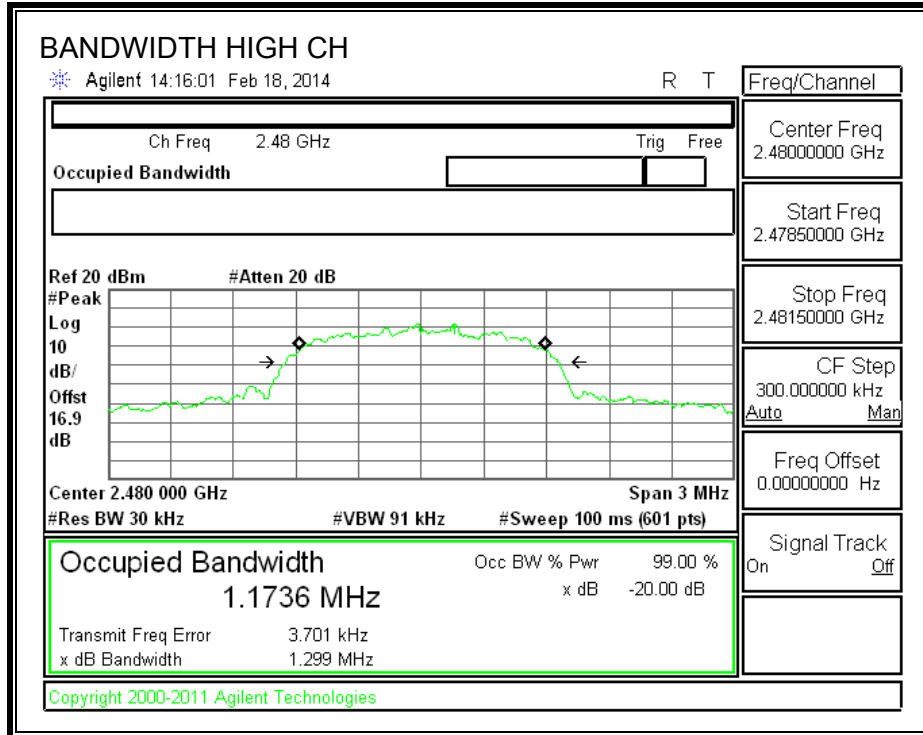

**8PSK 99% BANDWIDTH**

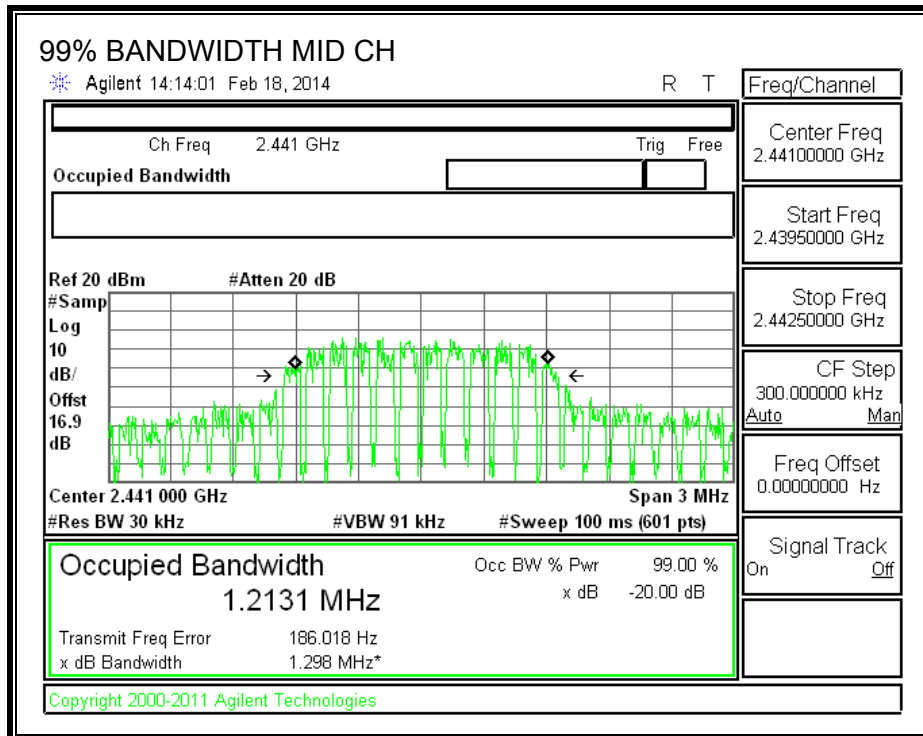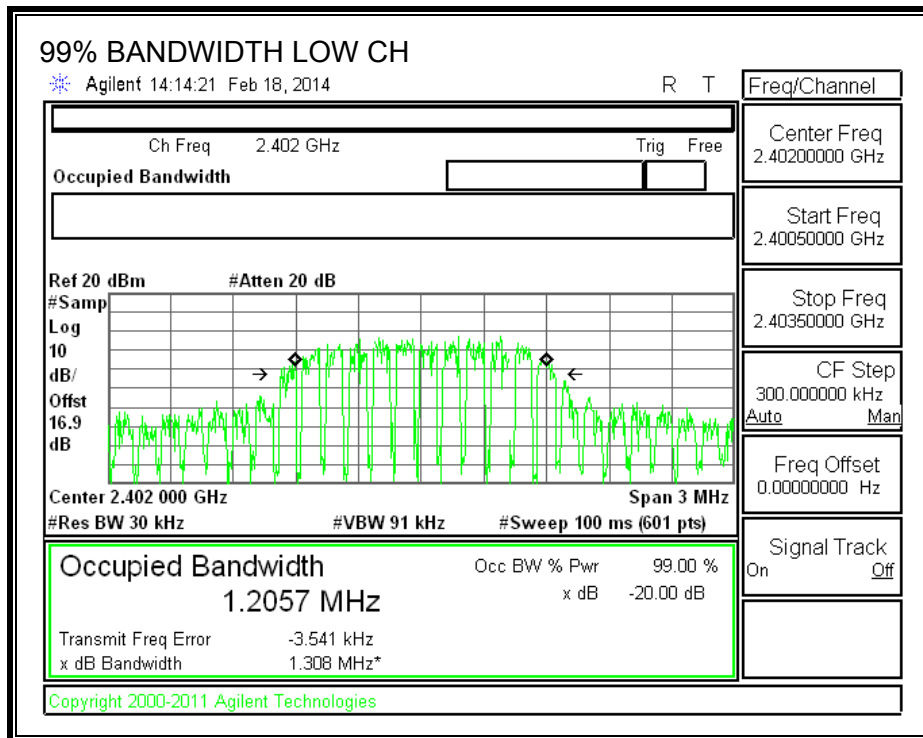

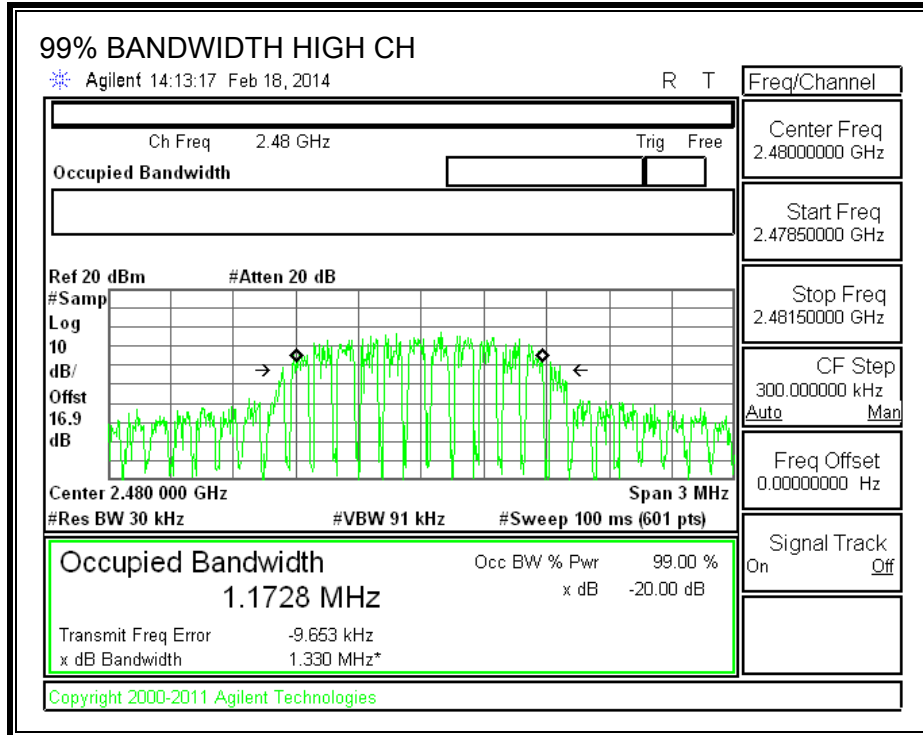

## **8.2. HOPPING FREQUENCY SEPARATION**

### **LIMIT**

FCC §15.247 (a) (1)

IC RSS-210 A8.1 (b)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.


Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

### **TEST PROCEDURE**

DA 00-705: The transmitter output is connected to a spectrum analyzer. The RBW is set to 300 kHz and the VBW is set to 300 kHz. The sweep time is coupled.

### **RESULTS**

**HOPPING FREQUENCY SEPARATION**

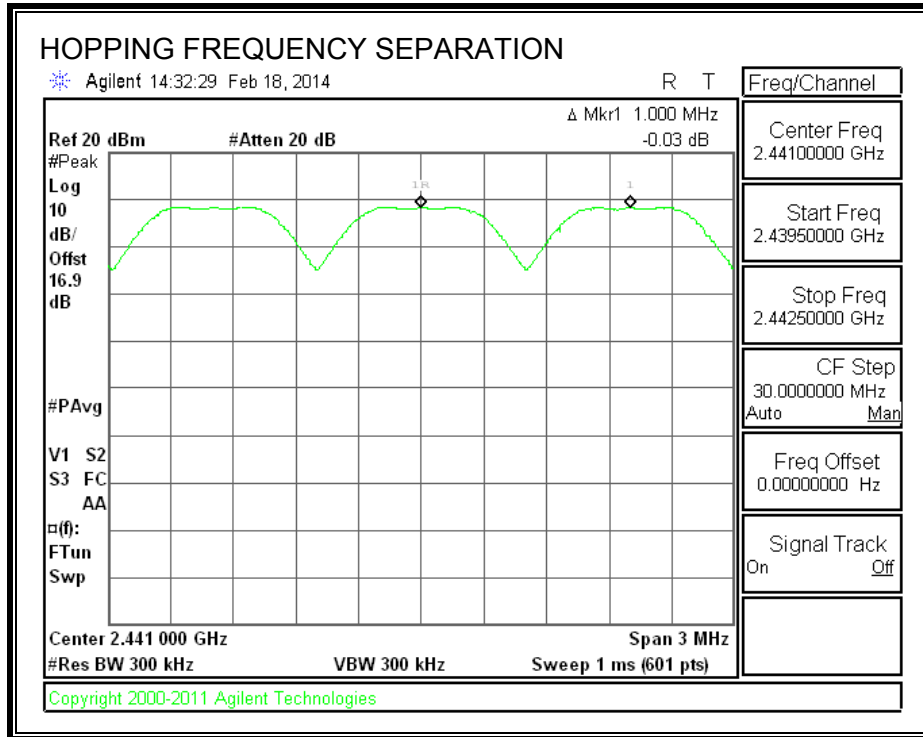

### **8.3. NUMBER OF HOPPING CHANNELS**

#### **LIMIT**

FCC §15.247 (a) (1) (iii)

IC RSS-210 A8.1 (d)

Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels.



#### **TEST PROCEDURE**

DA 00-705: The transmitter output is connected to a spectrum analyzer. The span is set to cover the entire authorized band, in either a single sweep or in multiple contiguous sweeps. The RBW is set to a maximum of 1 % of the span. The analyzer is set to Max Hold.



#### **RESULTS**

Normal Mode: 79 Channels observed.

**NUMBER OF HOPPING CHANNELS**

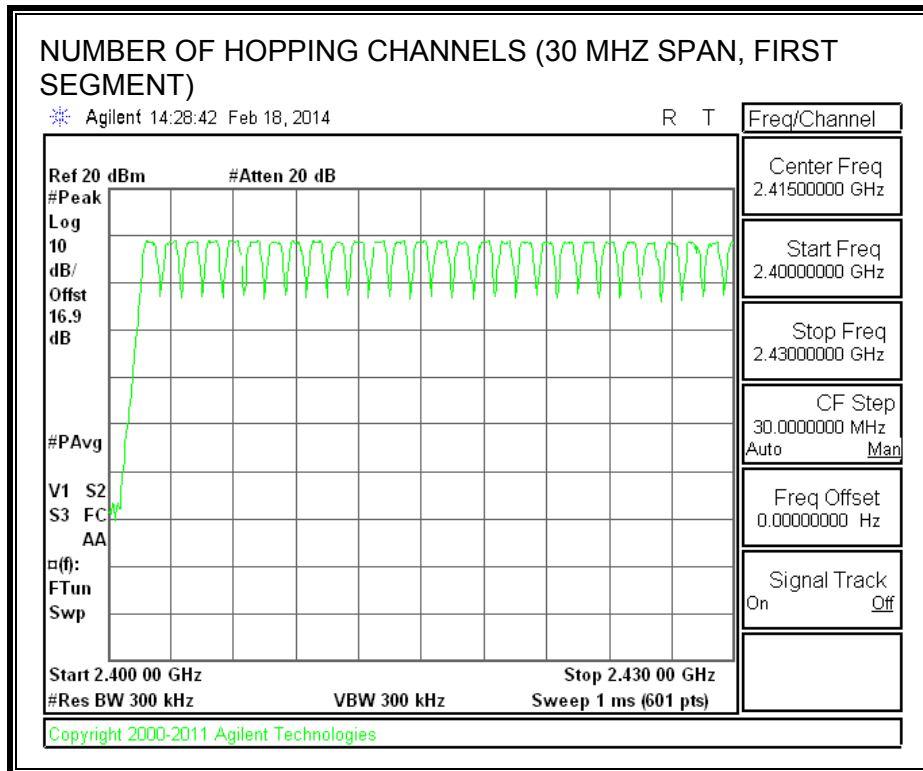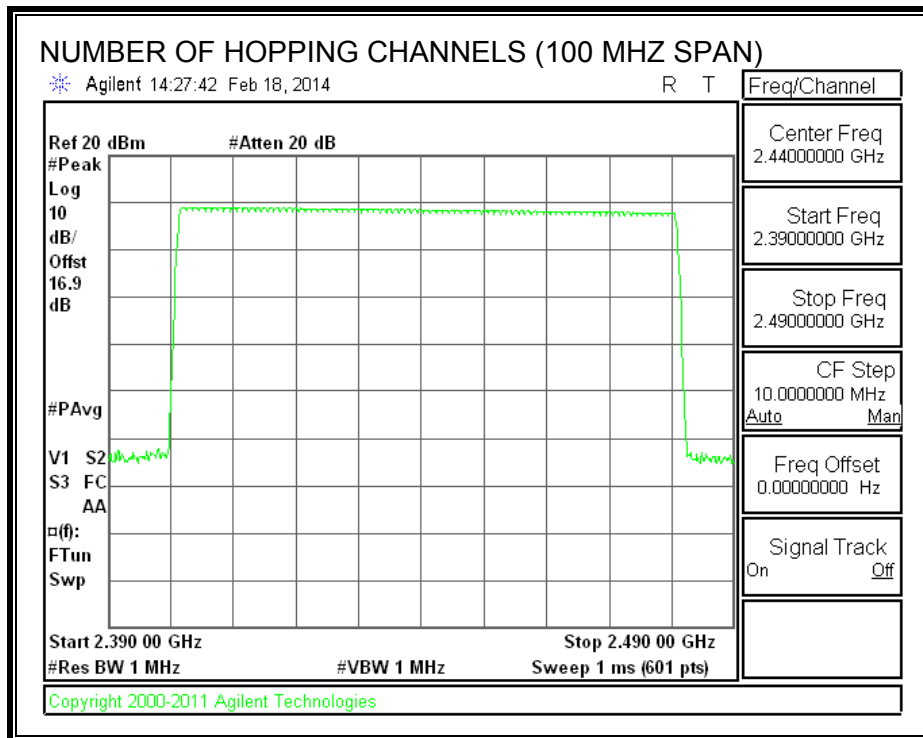



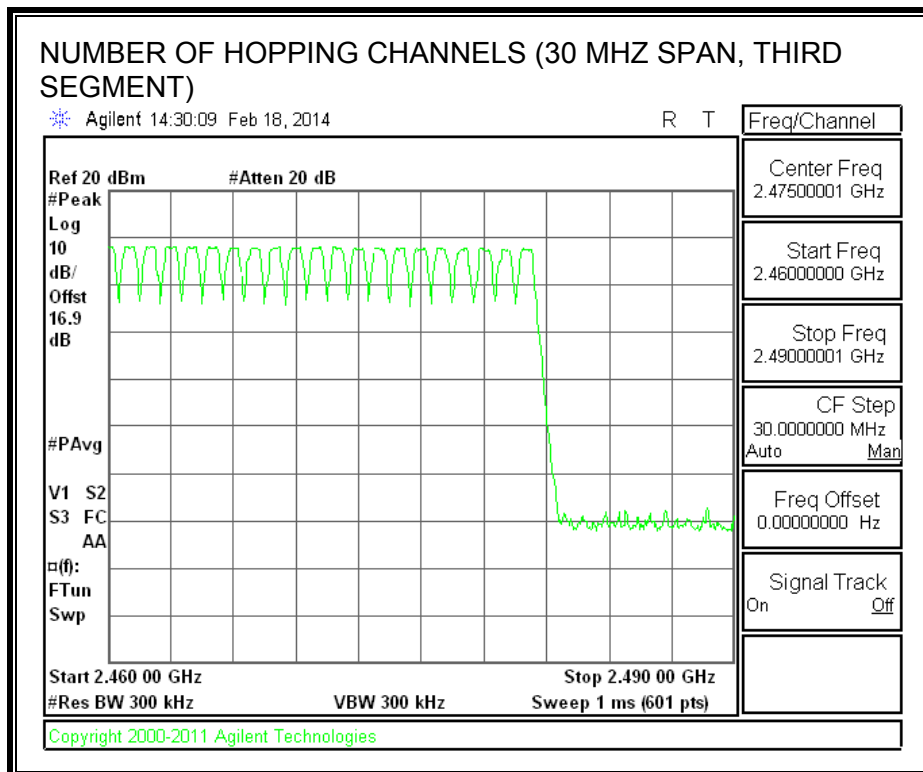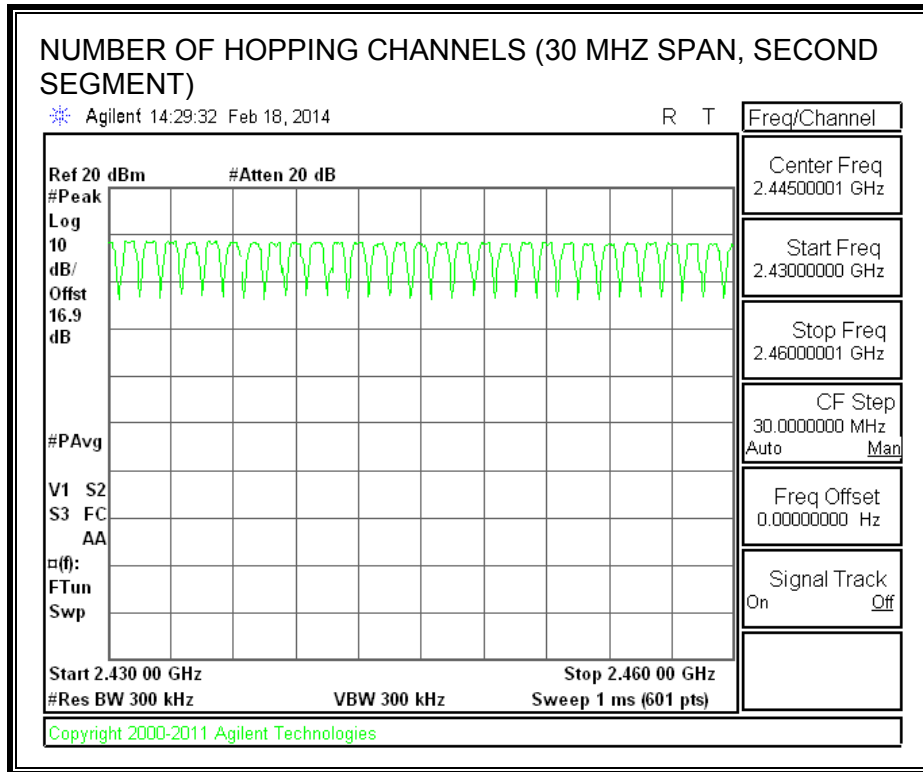

## 8.4. AVERAGE TIME OF OCCUPANCY

### LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-210 A8.1 (d)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

### TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a 3.16 second scan, to enable resolution of each occurrence.


The average time of occupancy in the specified 31.6 second period (79 channels \* 0.4 s) is equal to  $10 * (\# \text{ of pulses in } 3.16 \text{ s}) * \text{ pulse width}$ .

For AFH mode, the average time of occupancy in the specified 8 second period (20 channels \* 0.4 seconds) is equal to  $10 * (\# \text{ of pulses in } 0.8 \text{ s}) * \text{ pulse width}$ .


### RESULTS

| DH Packet               | Pulse Width (msec) | Number of Pulses in 3.16 seconds | Average Time of Occupancy (sec) | Limit (sec) | Margin (sec) |
|-------------------------|--------------------|----------------------------------|---------------------------------|-------------|--------------|
| <b>GFSK Normal Mode</b> |                    |                                  |                                 |             |              |
| DH1                     | 0.3828             | 29                               | 0.111                           | 0.4         | -0.289       |
| DH3                     | 1.636              | 12                               | 0.196                           | 0.4         | -0.204       |
| DH5                     | 2.888              | 11                               | 0.318                           | 0.4         | -0.082       |
| <b>GFSK AFH Mode</b>    |                    |                                  |                                 |             |              |
| DH Packet               | Pulse Width (msec) | Number of Pulses in 0.8 seconds  | Average Time of Occupancy (sec) | Limit (sec) | Margin (sec) |
| DH1                     | 0.3828             | 8                                | 0.031                           | 0.4         | -0.369       |
| DH3                     | 1.636              | 3                                | 0.049                           | 0.4         | -0.351       |
| DH5                     | 2.888              | 3                                | 0.087                           | 0.4         | -0.313       |


**PULSE WIDTH - DH1**

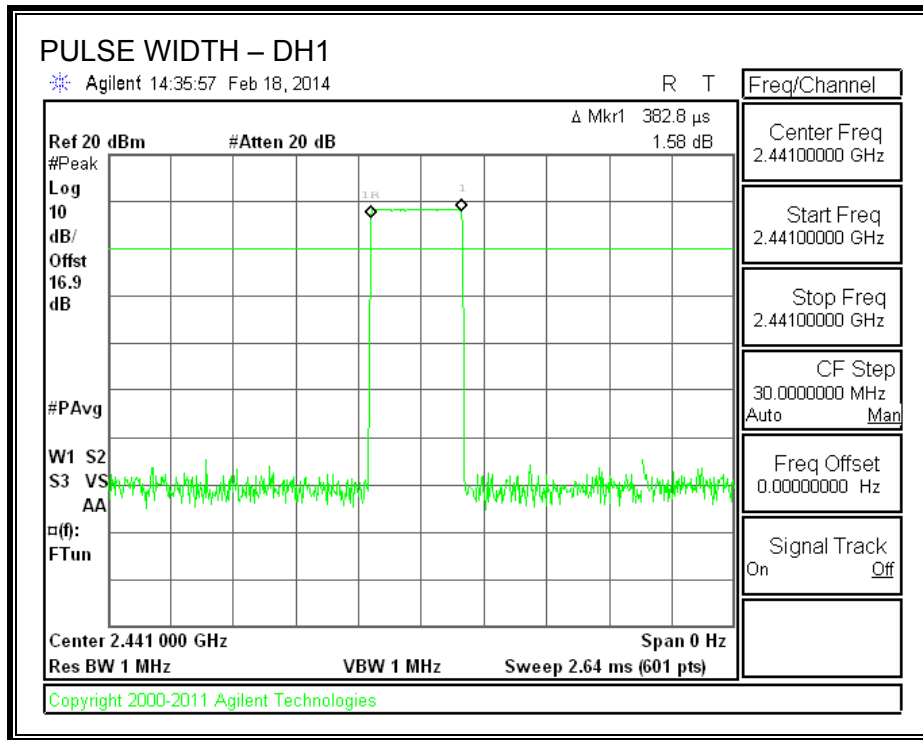


**NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD - DH1**

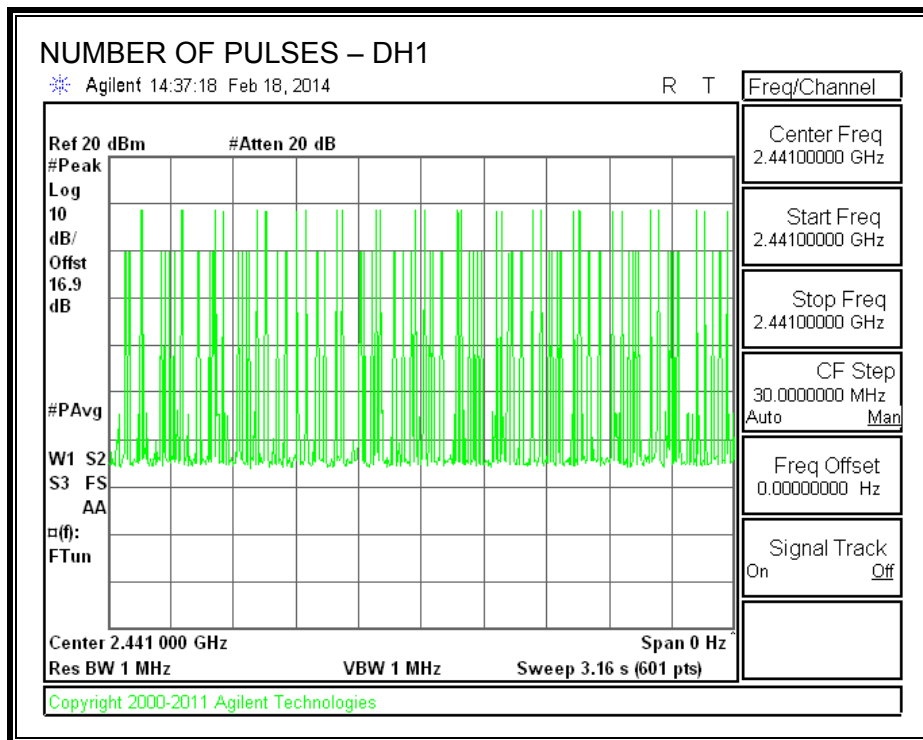


**PULSE WIDTH – DH3**

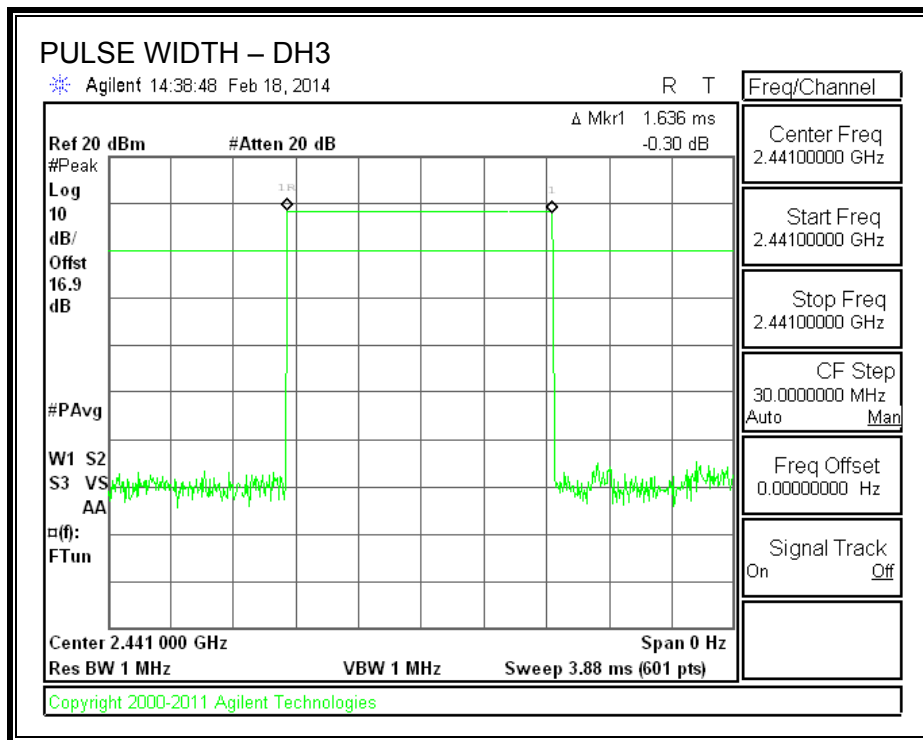


**NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD – DH3**

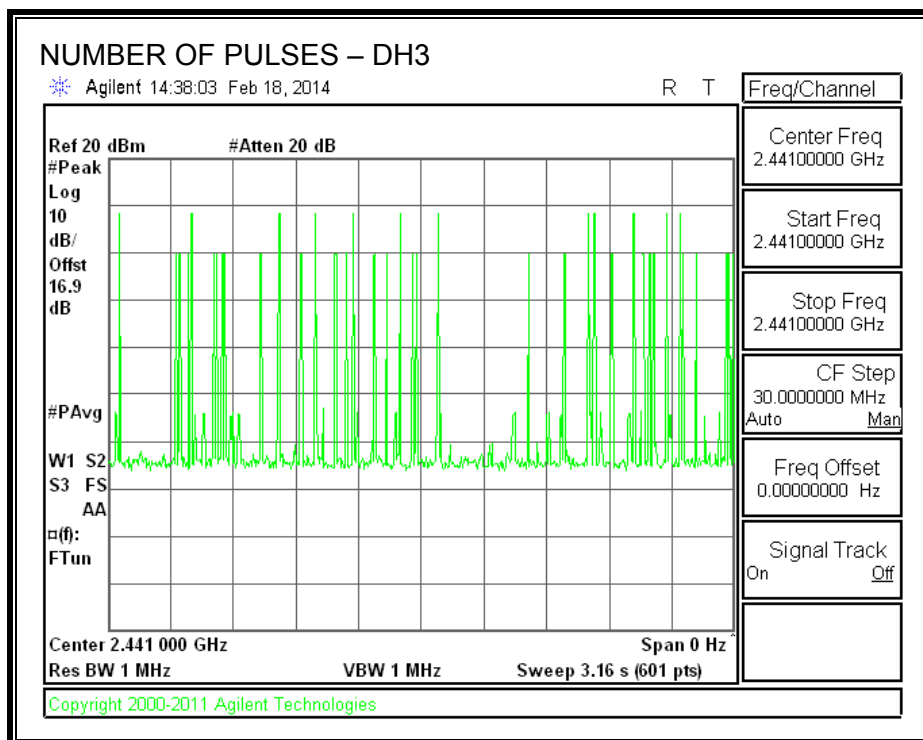

**PULSE WIDTH – DH5**

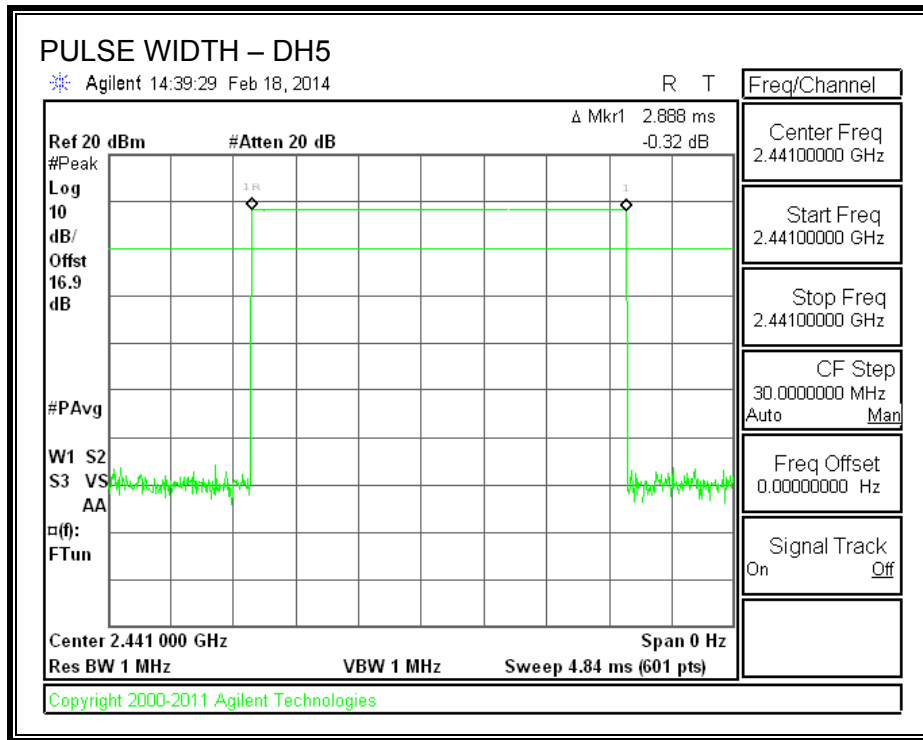

**NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD – DH5**

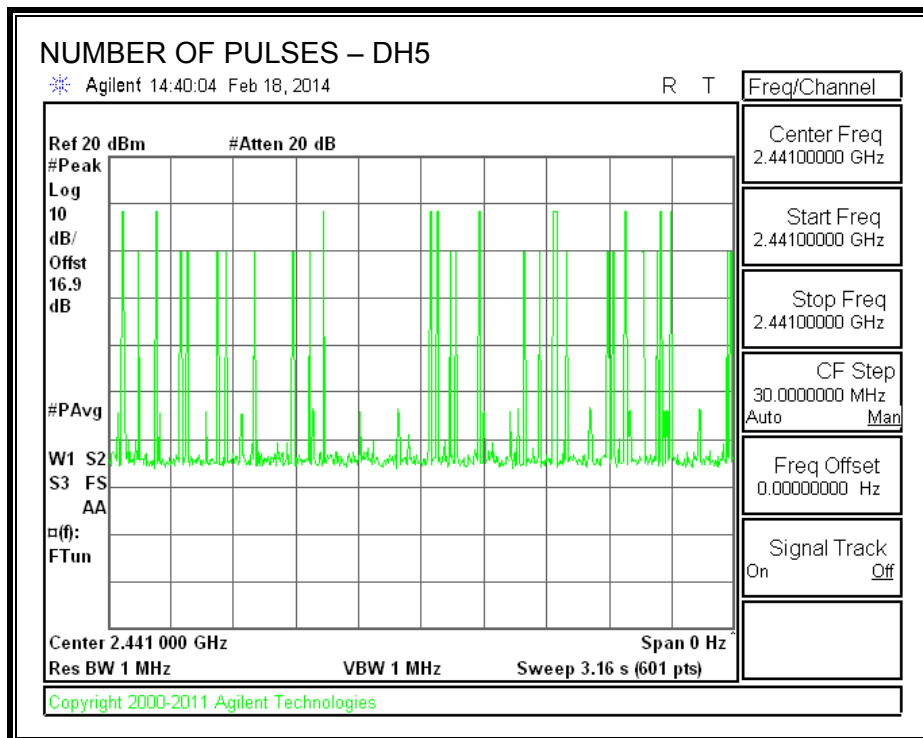

## 8.5. OUTPUT POWER

### LIMIT

§15.247 (b) (1)

RSS-210 Issue 7 Clause A8.4

The maximum antenna gain is less than 6 dBi, therefore the limit is 21 dBm.

### TEST PROCEDURE

DA 00-705: The transmitter output is connected to a spectrum analyzer the analyzer bandwidth is set to a value greater than the 20 dB bandwidth of the EUT.

### RESULTS



#### 8.5.1. BASIC DATA RATE GFSK MODULATION


| Channel | Frequency (MHz) | Output Power (dBm) | Limit (dBm) | Margin (dB) |
|---------|-----------------|--------------------|-------------|-------------|
| Low     | 2402            | 8.88               | 21          | -12.12      |
| Middle  | 2441            | 8.39               | 21          | -12.61      |
| High    | 2480            | 7.65               | 21          | -13.35      |
| Worst   |                 | 8.88               |             | -12.12      |

#### 8.5.2. ENHANCED DATA RATE 8PSK MODULATION

| Channel | Frequency (MHz) | Output Power (dBm) | Limit (dBm) | Margin (dB) |
|---------|-----------------|--------------------|-------------|-------------|
| Low     | 2402            | 8.31               | 21          | -12.69      |
| Middle  | 2441            | 7.84               | 21          | -13.16      |
| High    | 2480            | 7.12               | 21          | -13.88      |
| Worst   |                 | 8.31               |             | -12.69      |



**GFSK OUTPUT POWER**

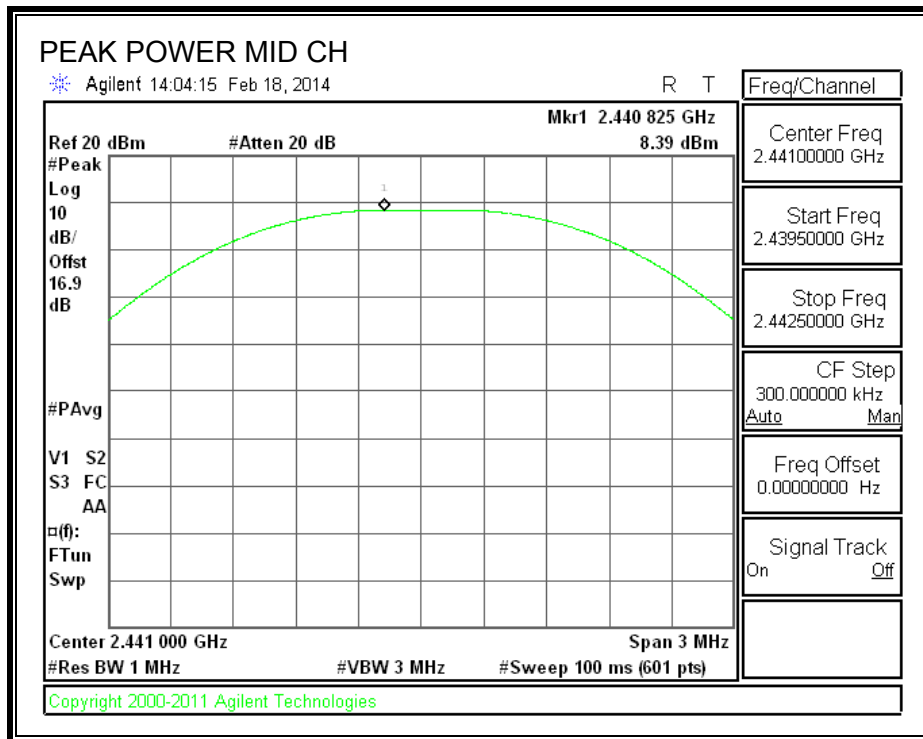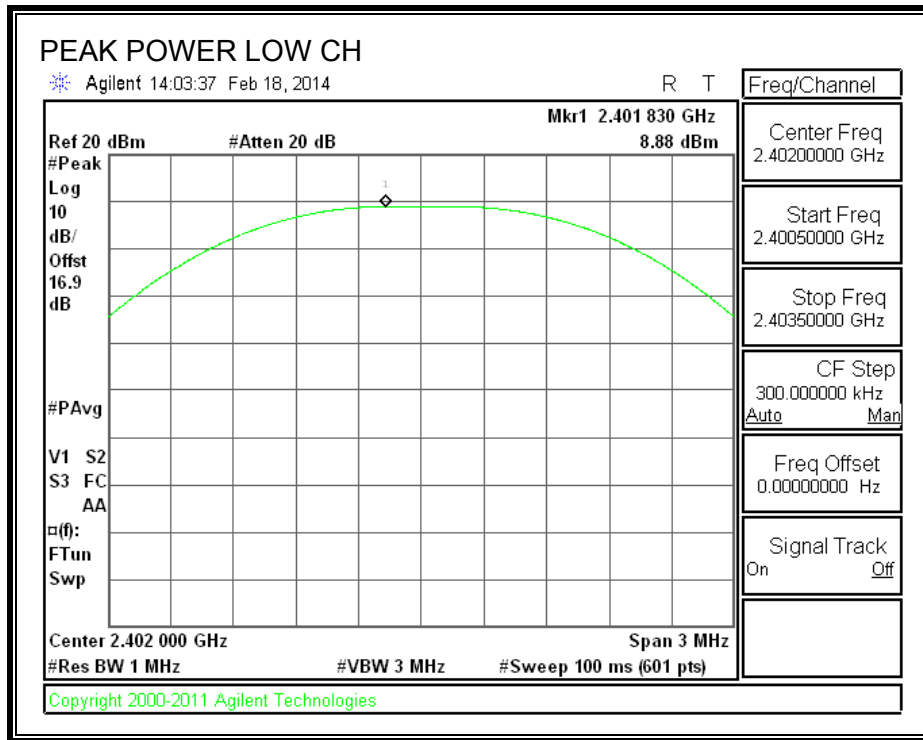


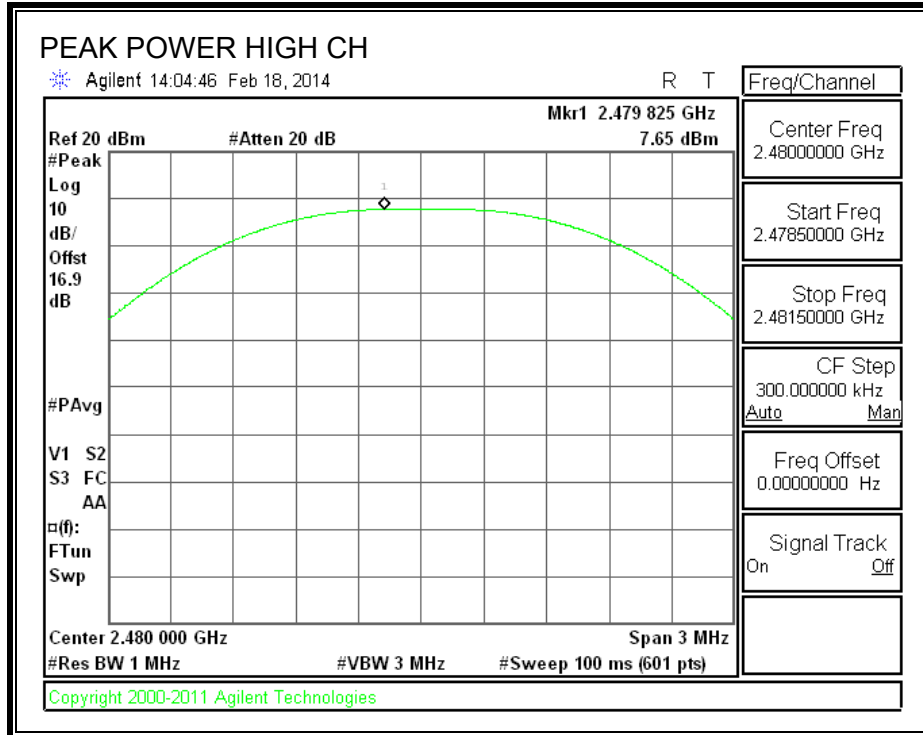



**8PSK OUTPUT POWER**

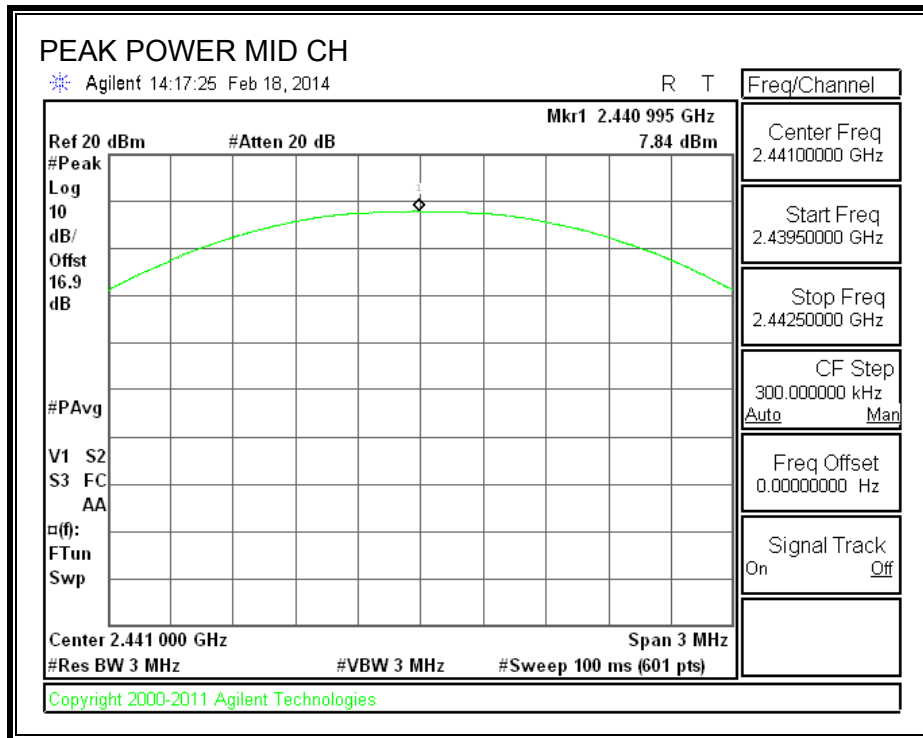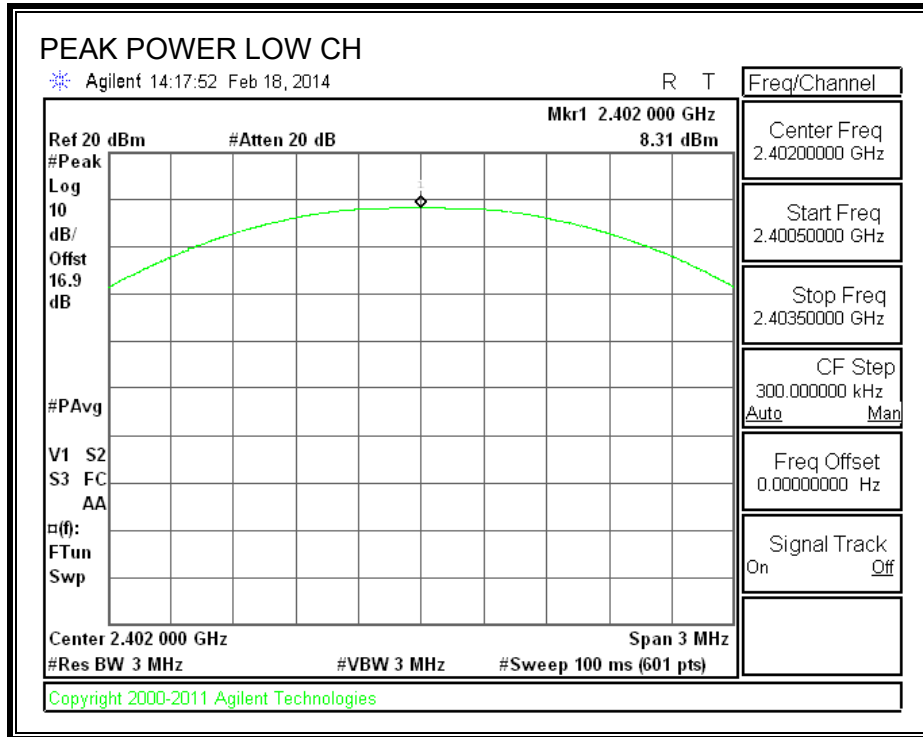

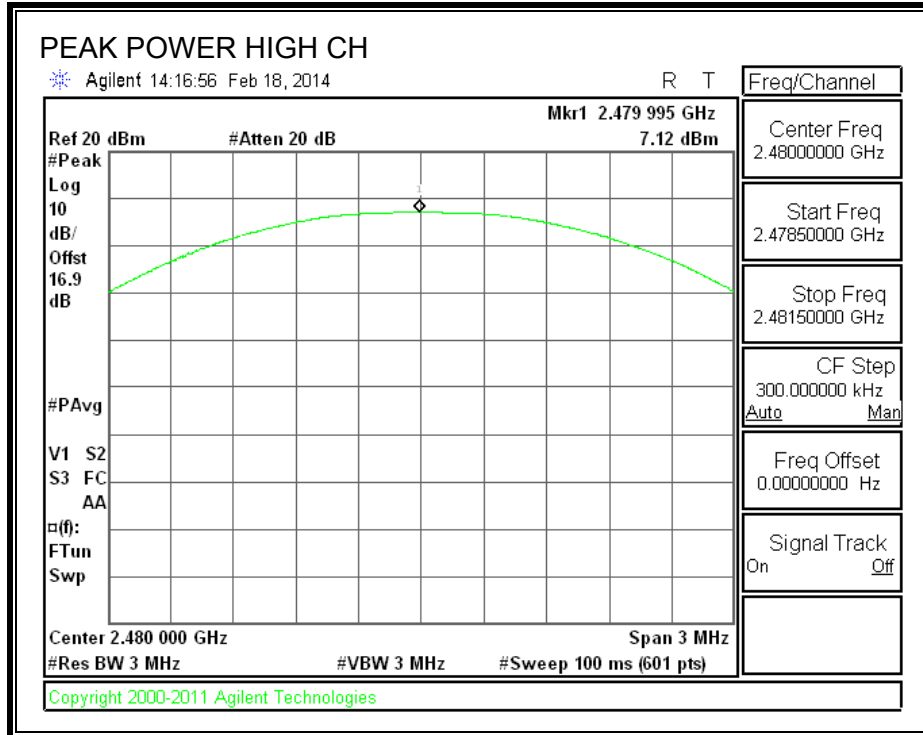

## 8.6. AVERAGE POWER

### LIMIT

None; for reporting purposes only.

### TEST PROCEDURE

DA 00-705: The transmitter output is connected to a power meter.

### RESULTS

The cable assembly insertion loss of 10.7 dB (including 10 dB pad and 0.7 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

#### 8.6.1. BASIC DATA RATE GFSK MODULATION

| Channel | Frequency (MHz) | Average Power (dBm) |
|---------|-----------------|---------------------|
| Low     | 2402            | 8.80                |
| Middle  | 2441            | 8.30                |
| High    | 2480            | 7.60                |
| Worst   |                 | 8.80                |

#### 8.6.2. DATA RATE PI/4-DQPSK MODULATION

| Channel | Frequency (MHz) | Average Power (dBm) |
|---------|-----------------|---------------------|
| Low     | 2402            | 5.90                |
| Middle  | 2441            | 5.40                |
| High    | 2480            | 4.50                |
| Worst   |                 | 5.90                |

### 8.6.3. ENHANCED DATA RATE 8PSK MODULATION

| Channel | Frequency (MHz) | Average Power (dBm) |
|---------|-----------------|---------------------|
| Low     | 2402            | 6.00                |
| Middle  | 2441            | 5.40                |
| High    | 2480            | 4.50                |
| Worst   |                 | 6.00                |

## 8.7. CONDUCTED SPURIOUS EMISSIONS

### LIMITS

FCC §15.247 (d)

IC RSS-210 A8.5

Limit = -20 dBc

### TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.



The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

The bandedges at 2.4 and 2.4835 GHz are investigated with the transmitter set to the normal hopping mode.



### RESULTS

### 8.7.1. BASIC DATA RATE GFSK MODULATION



#### SPURIOUS EMISSIONS, LOW CHANNEL

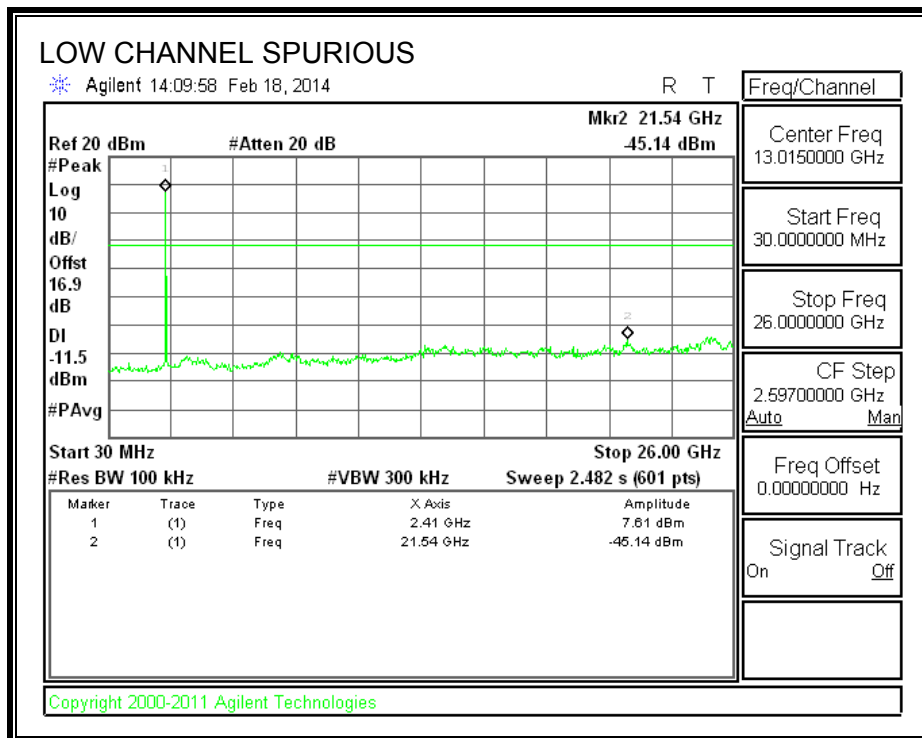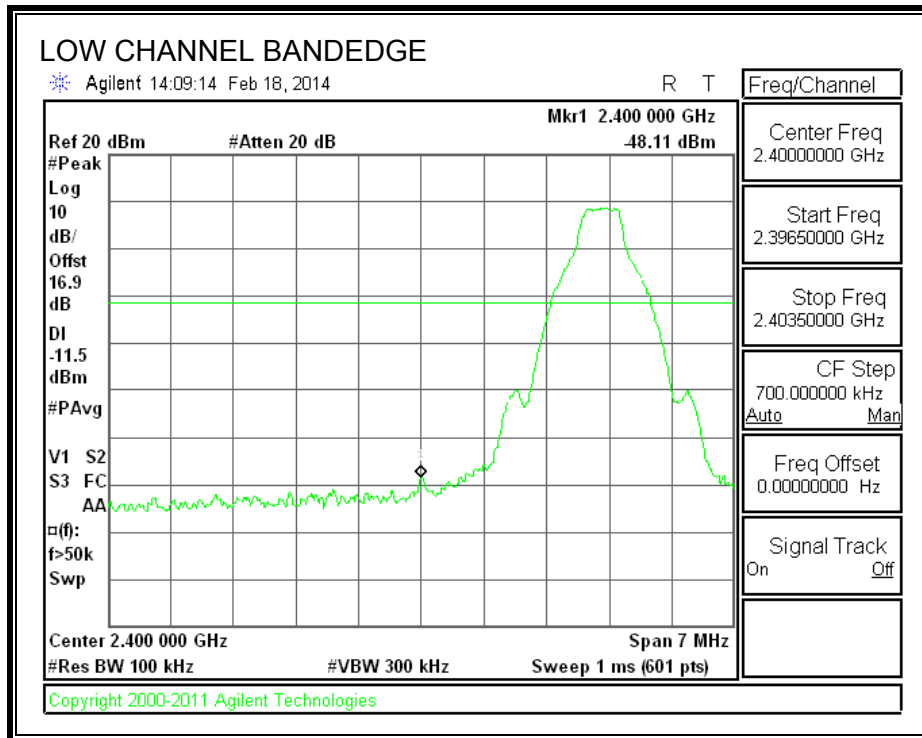

**SPURIOUS EMISSIONS, MID CHANNEL**

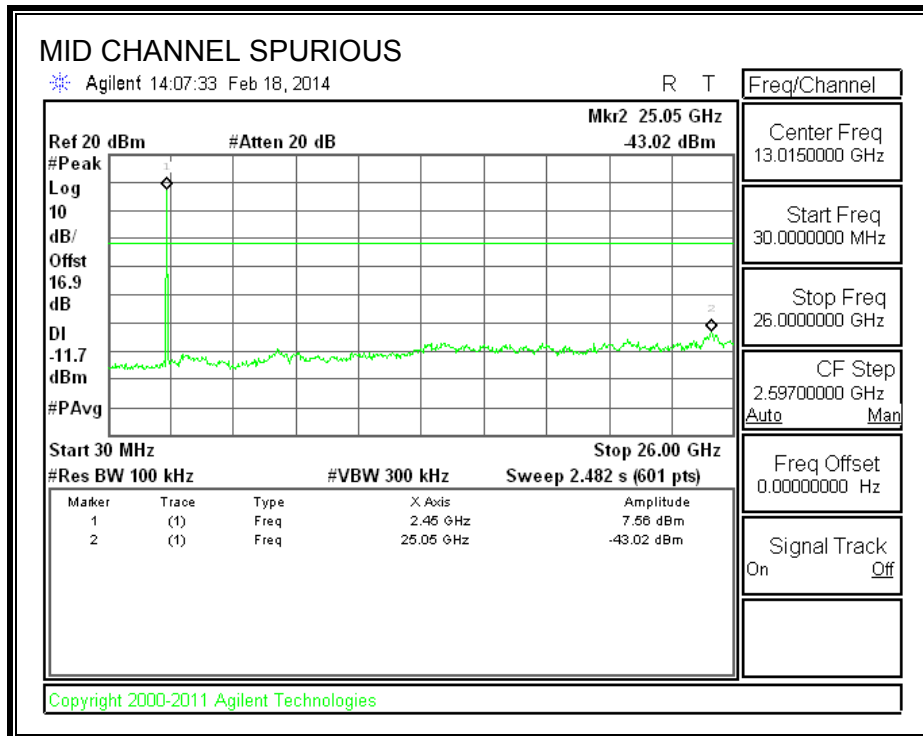
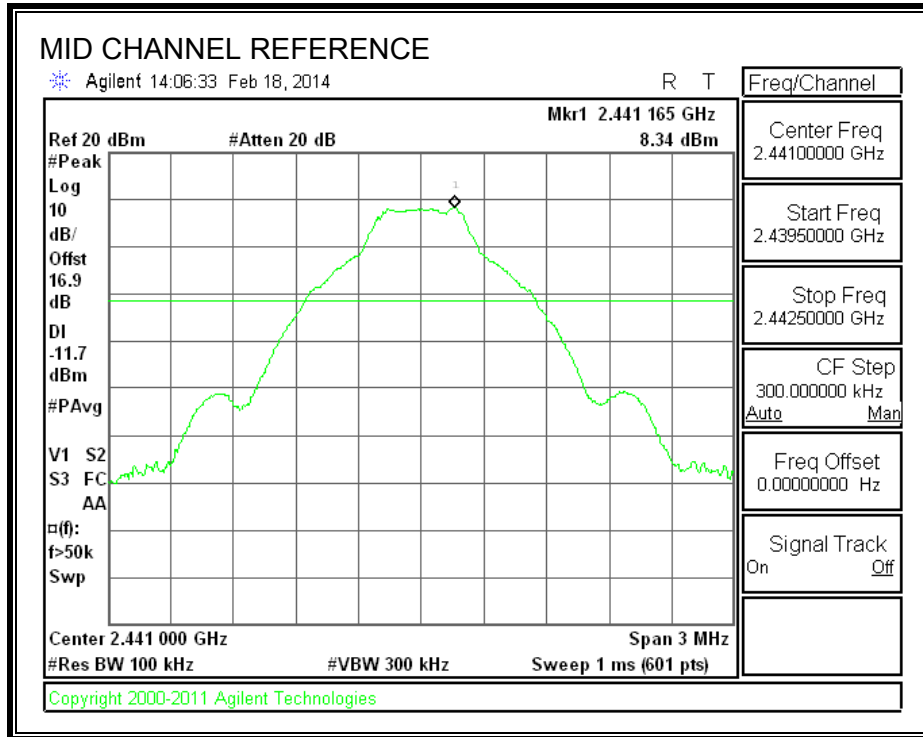


**SPURIOUS EMISSIONS, HIGH CHANNEL**

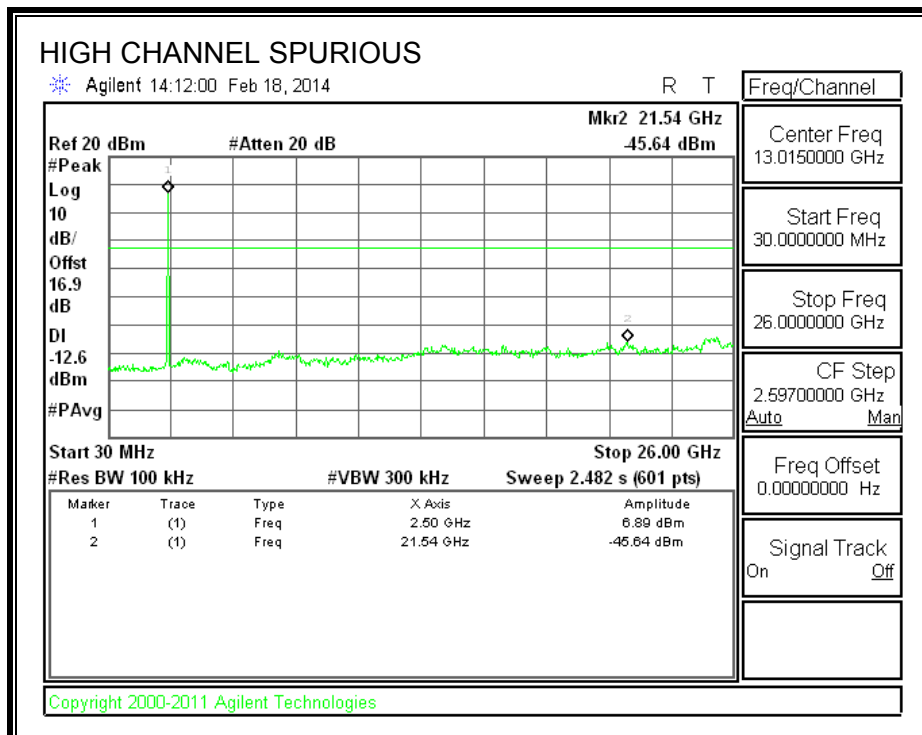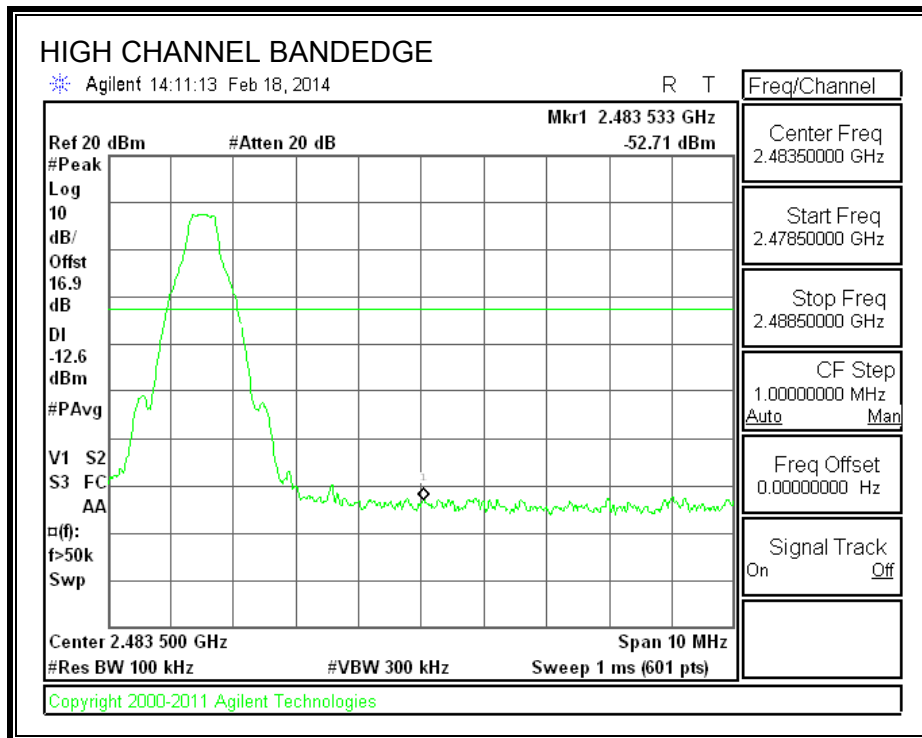





**SPURIOUS BANDEDGE EMISSIONS WITH GFSK HOPPING ON**

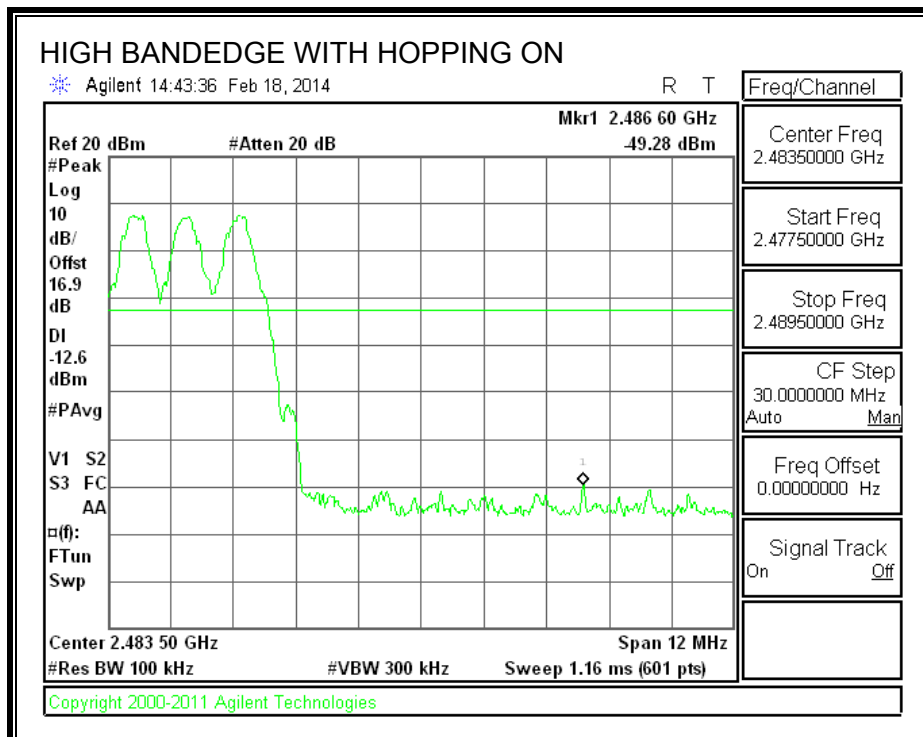
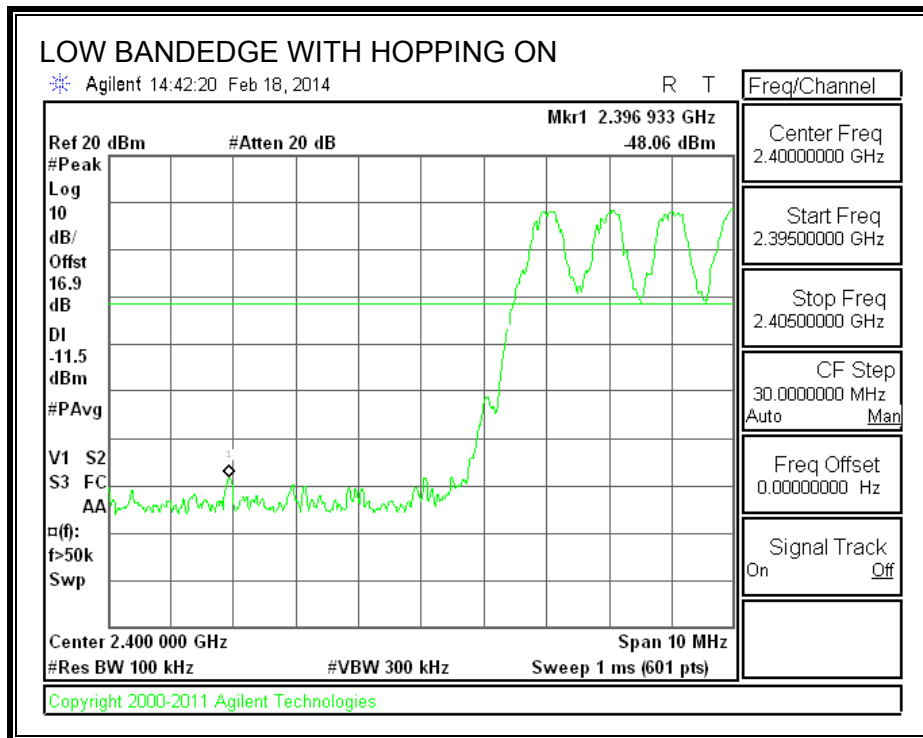


### 8.7.1. ENHANCED DATA RATE 8PSK MODULATION



#### SPURIOUS EMISSIONS, LOW CHANNEL

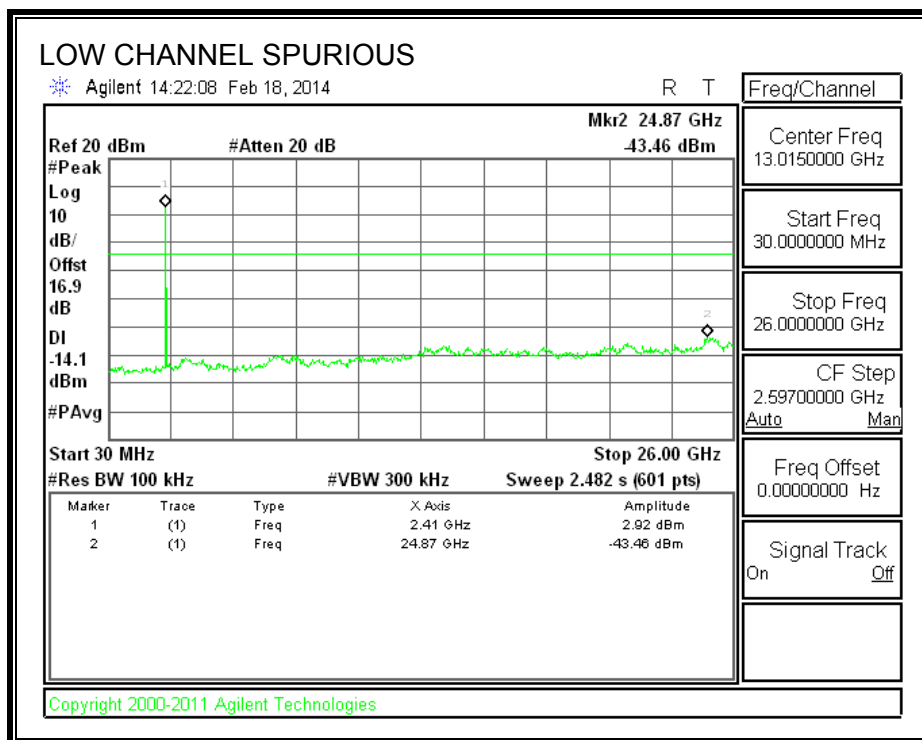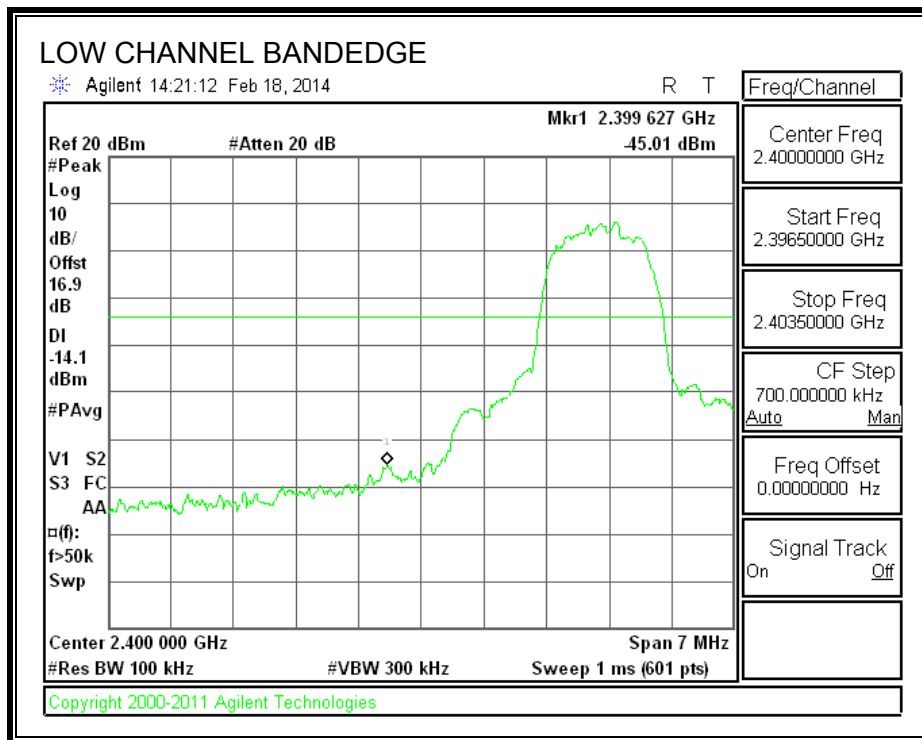



**SPURIOUS EMISSIONS, MID CHANNEL**

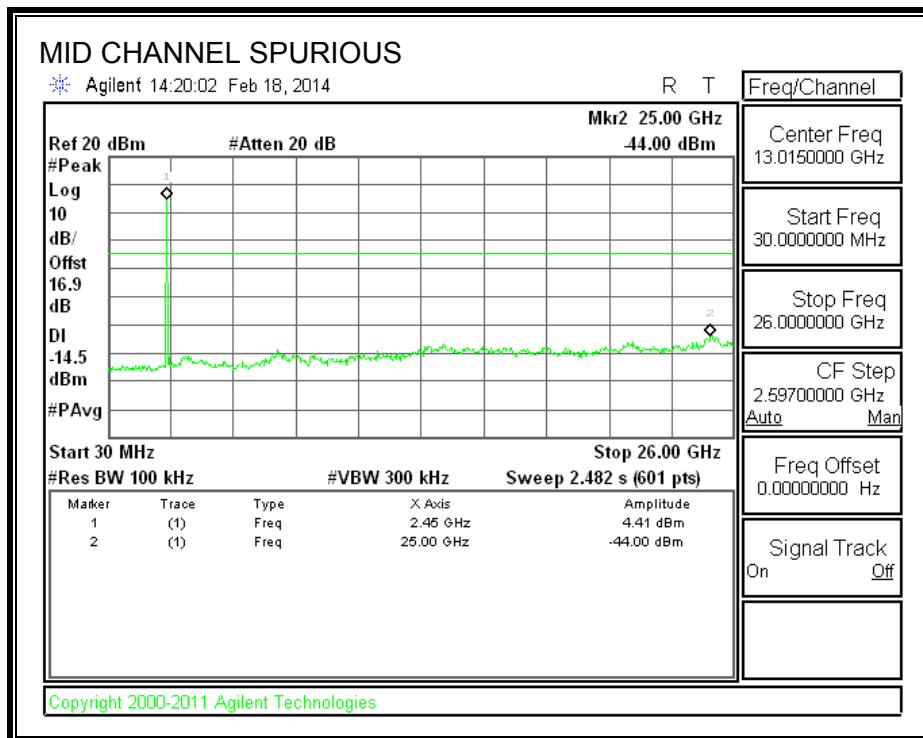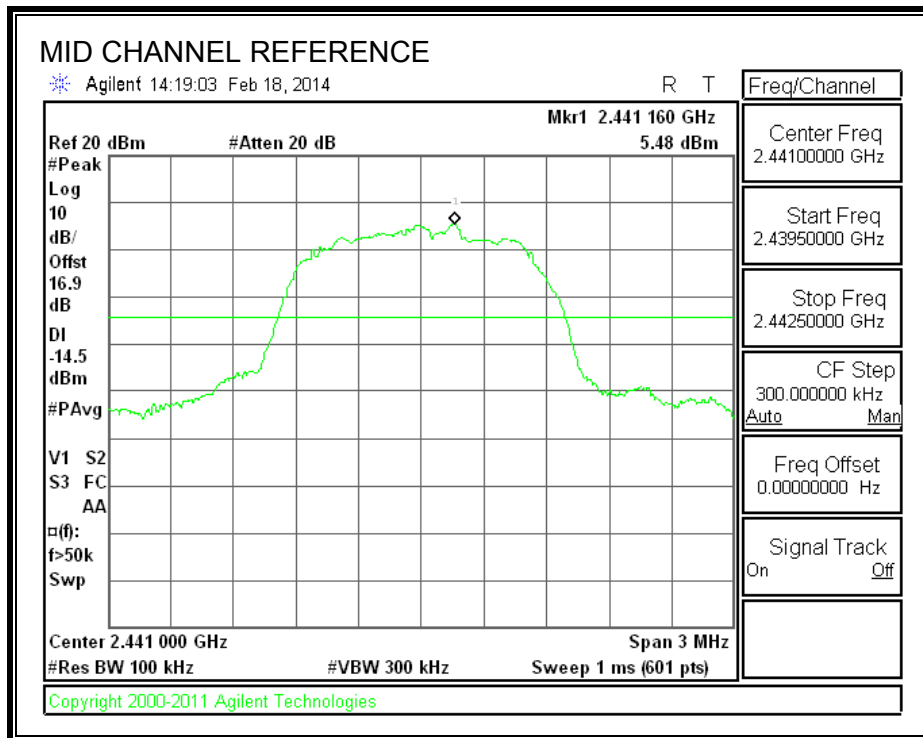

**SPURIOUS EMISSIONS, HIGH CHANNEL**

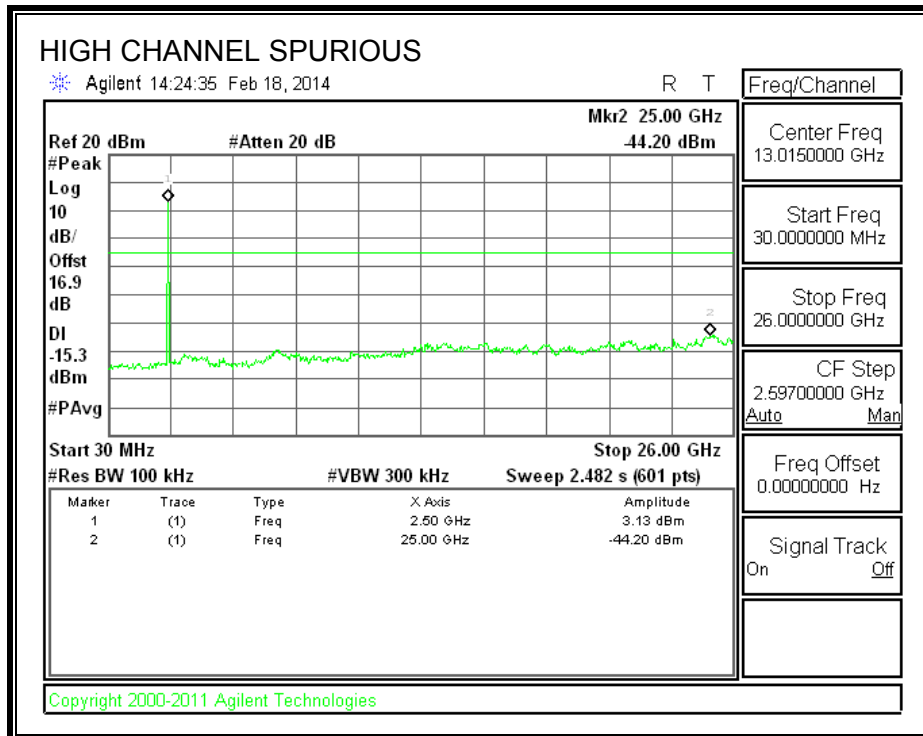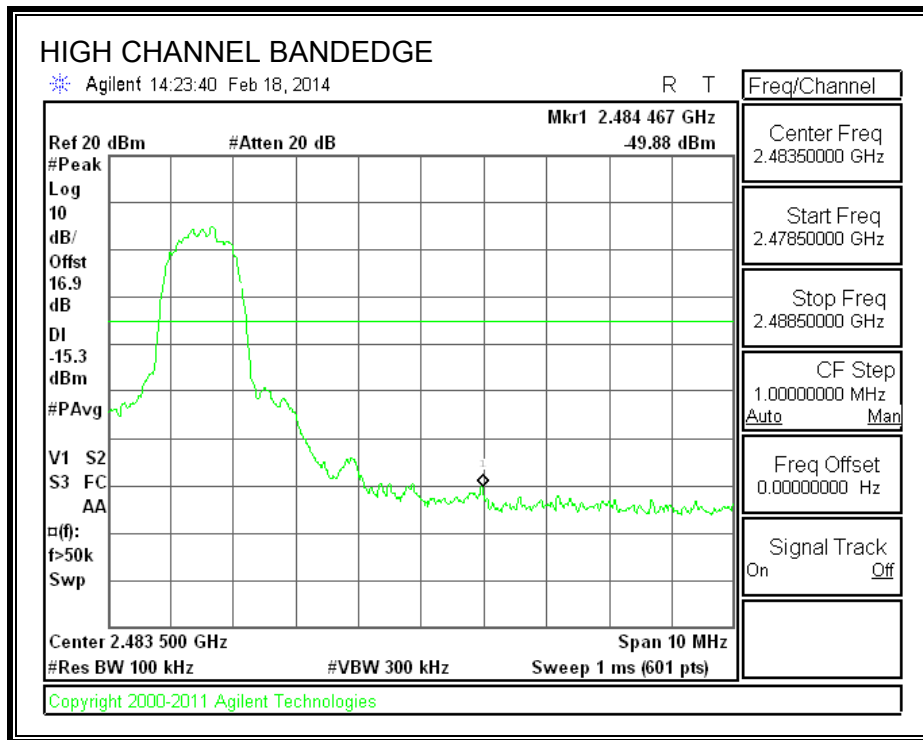

**SPURIOUS BANDEDGE EMISSIONS WITH 8PSK HOPPING ON**

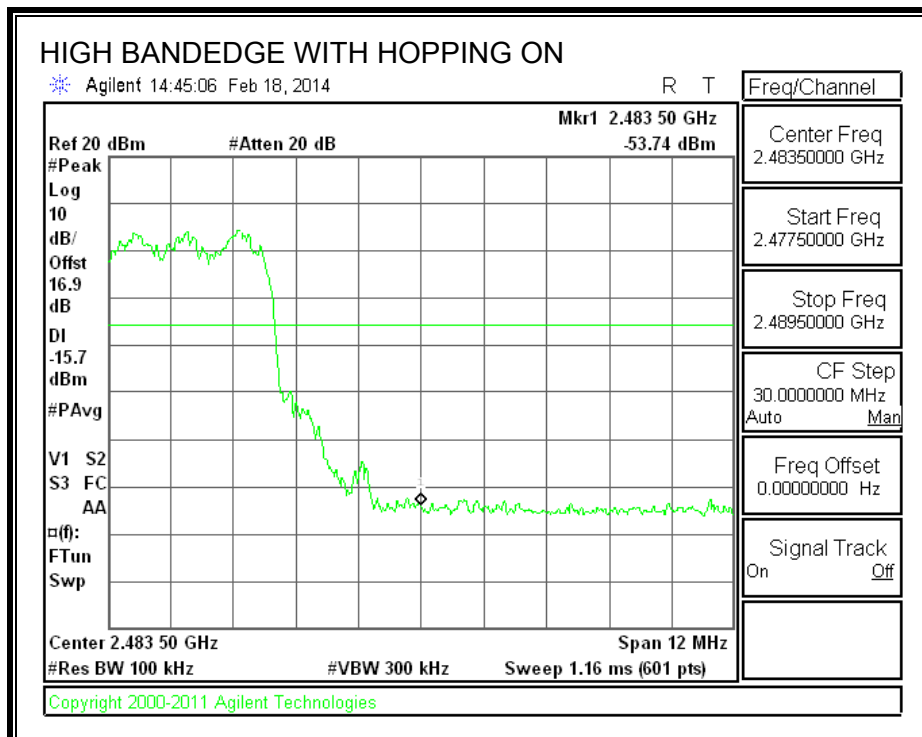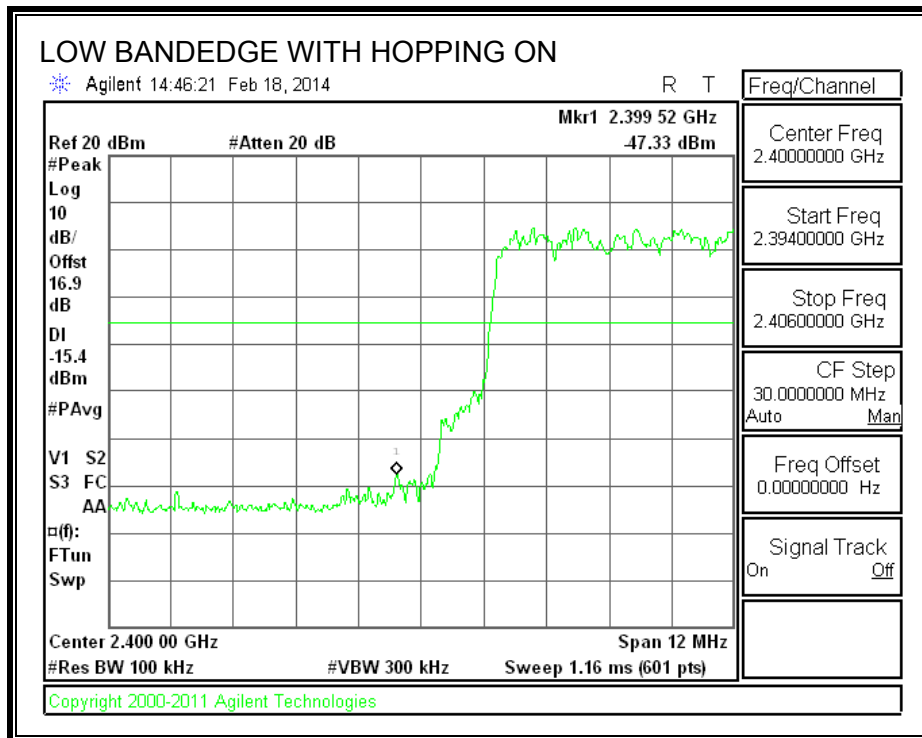

## 9. RADIATED TEST RESULTS

### 9.1. LIMITS AND PROCEDURE

#### LIMITS

FCC §15.205 and §15.209

IC RSS-210 Clause 2.6 (Transmitter)

IC RSS-GEN Clause 6 (Receiver)

| Frequency Range (MHz) | Field Strength Limit (uV/m) at 3 m | Field Strength Limit (dBuV/m) at 3 m |
|-----------------------|------------------------------------|--------------------------------------|
| 30 - 88               | 100                                | 40                                   |
| 88 - 216              | 150                                | 43.5                                 |
| 216 - 960             | 200                                | 46                                   |
| Above 960             | 500                                | 54                                   |

#### TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For band edge measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 1/T (on time) for average measurement.

$GFSK = 1/T = 1 / 0.0029S = 360Hz.$

For spurious emission measurement refer to MAV1 - KDB558074 Option 1 Maximum RMS Average



The spectrum from 1GHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.



## 9.2. TRANSMITTER ABOVE 1 GHz

### 9.2.1. BASIC DATA RATE GFSK MODULATION

#### RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

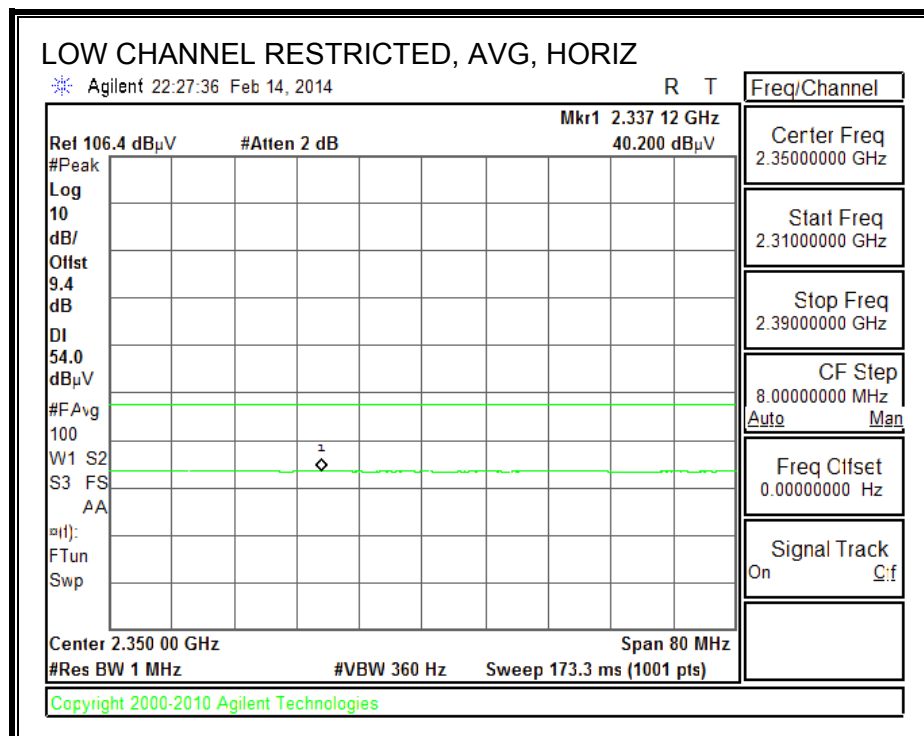
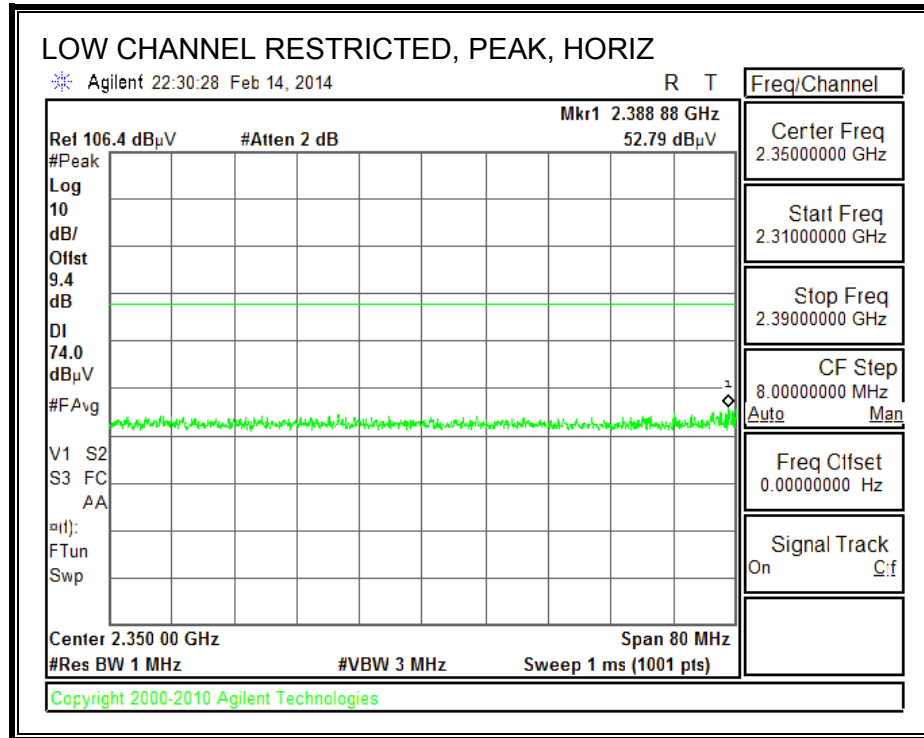


**RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)**

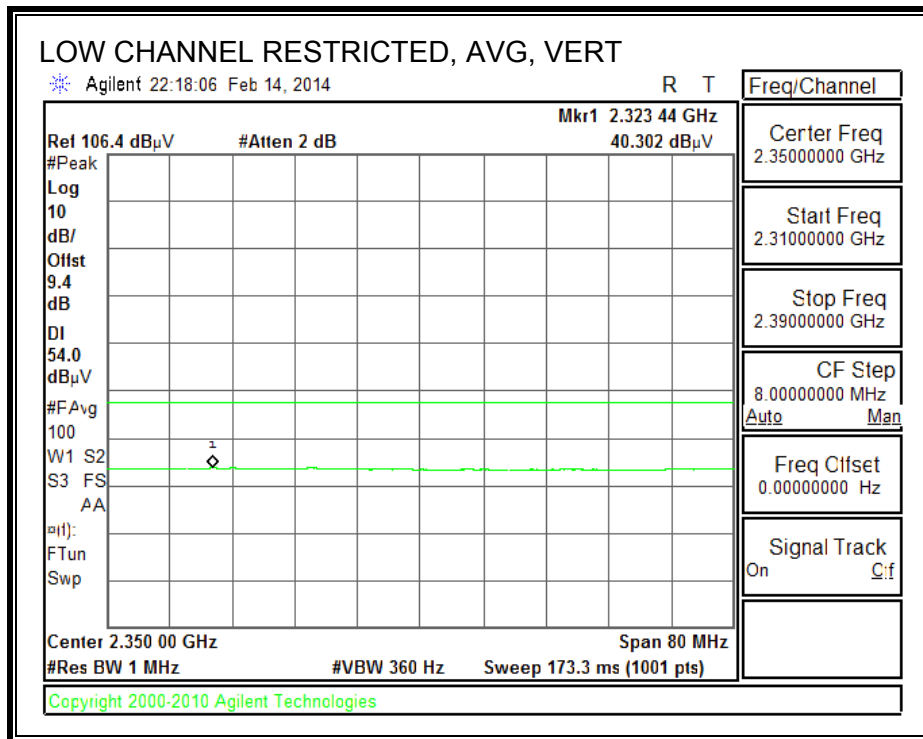
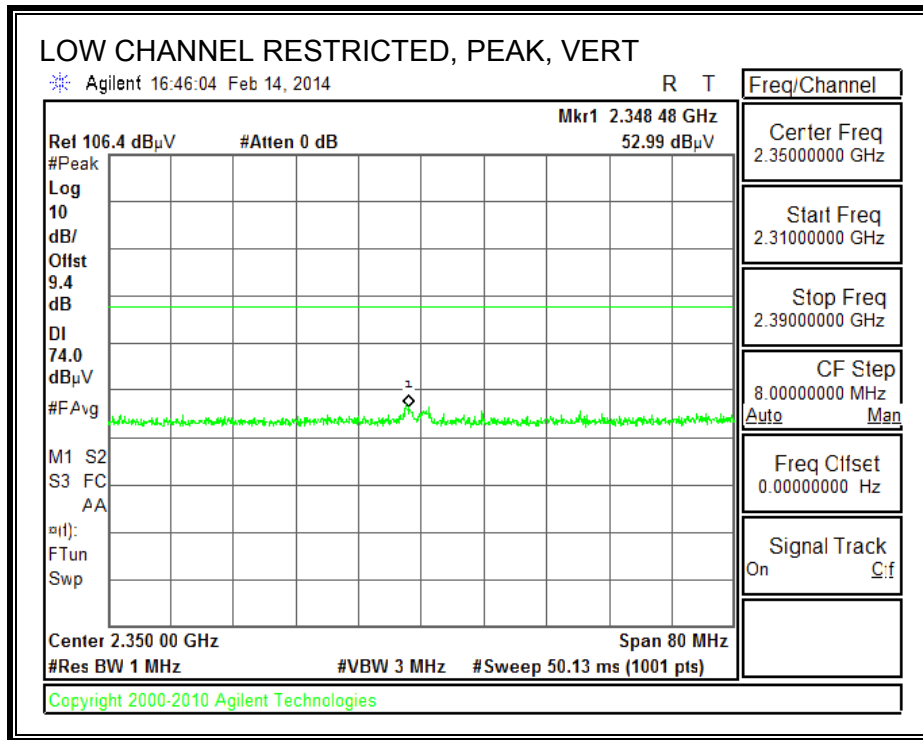




**RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)**

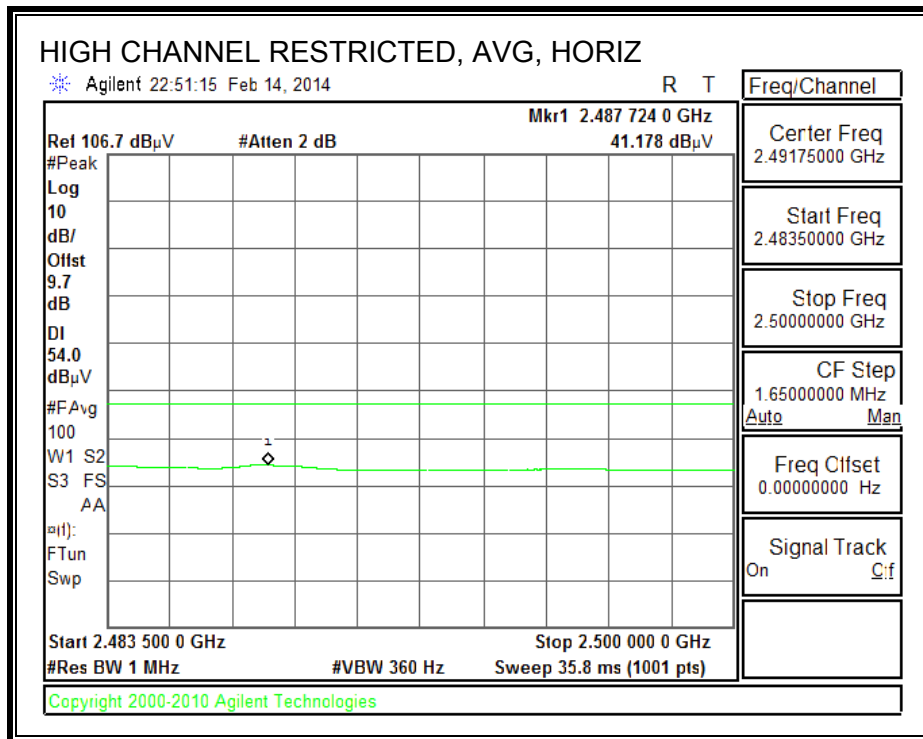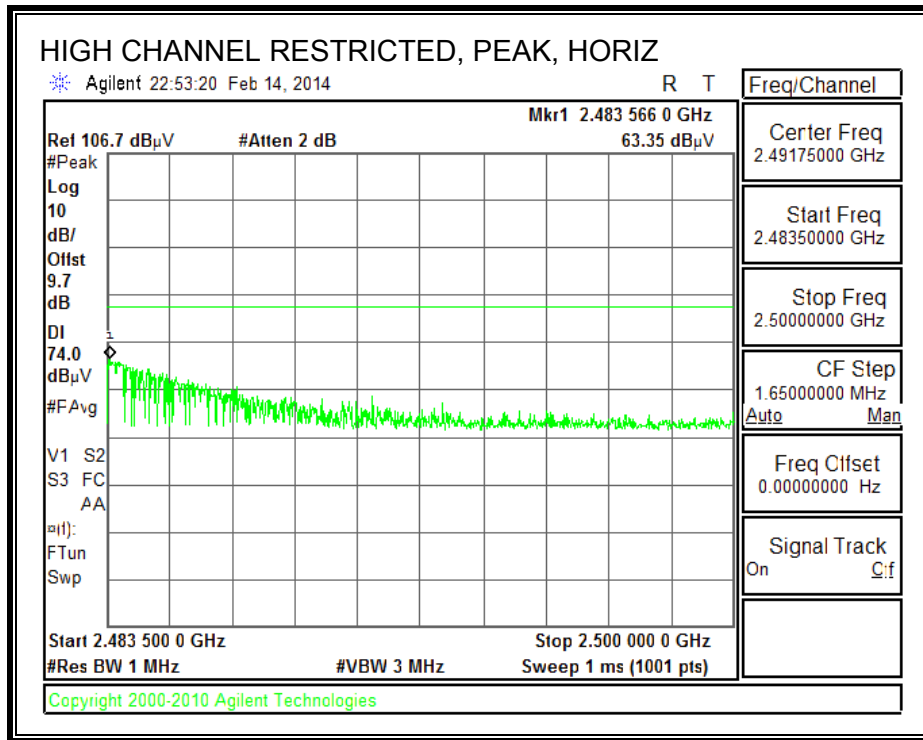


**RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)**

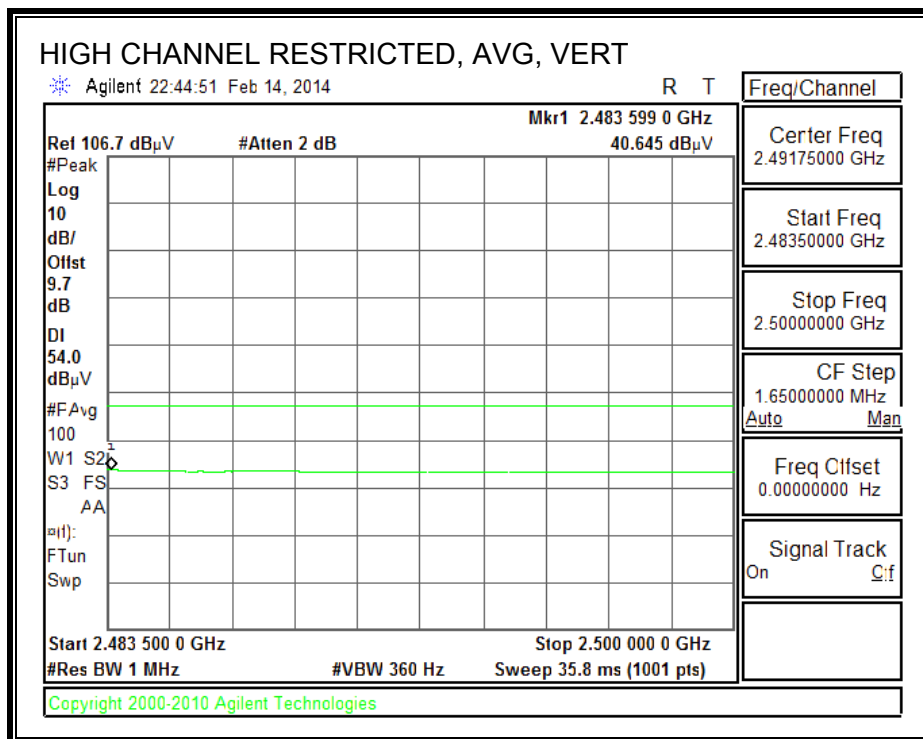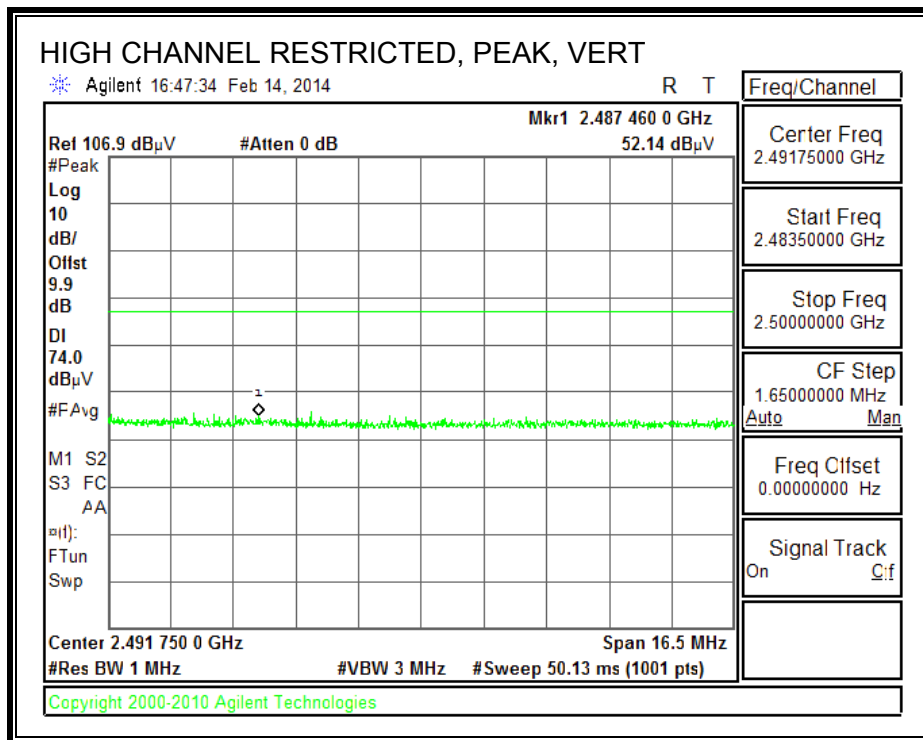


**HARMONICS AND SPURIOUS EMISSIONS**

**LOW CHANNEL  
 HORIZONTAL**

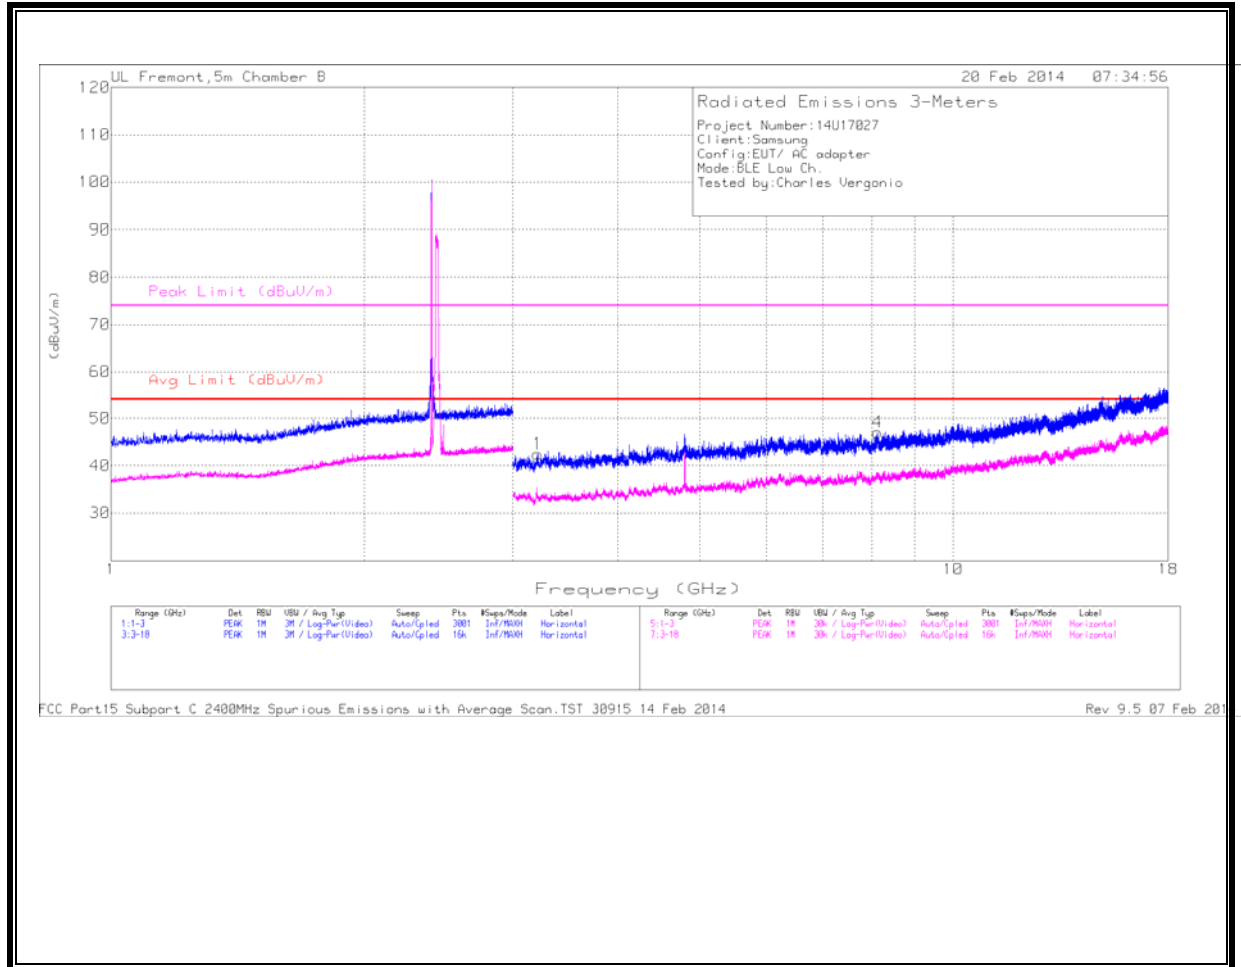

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

VERTICAL

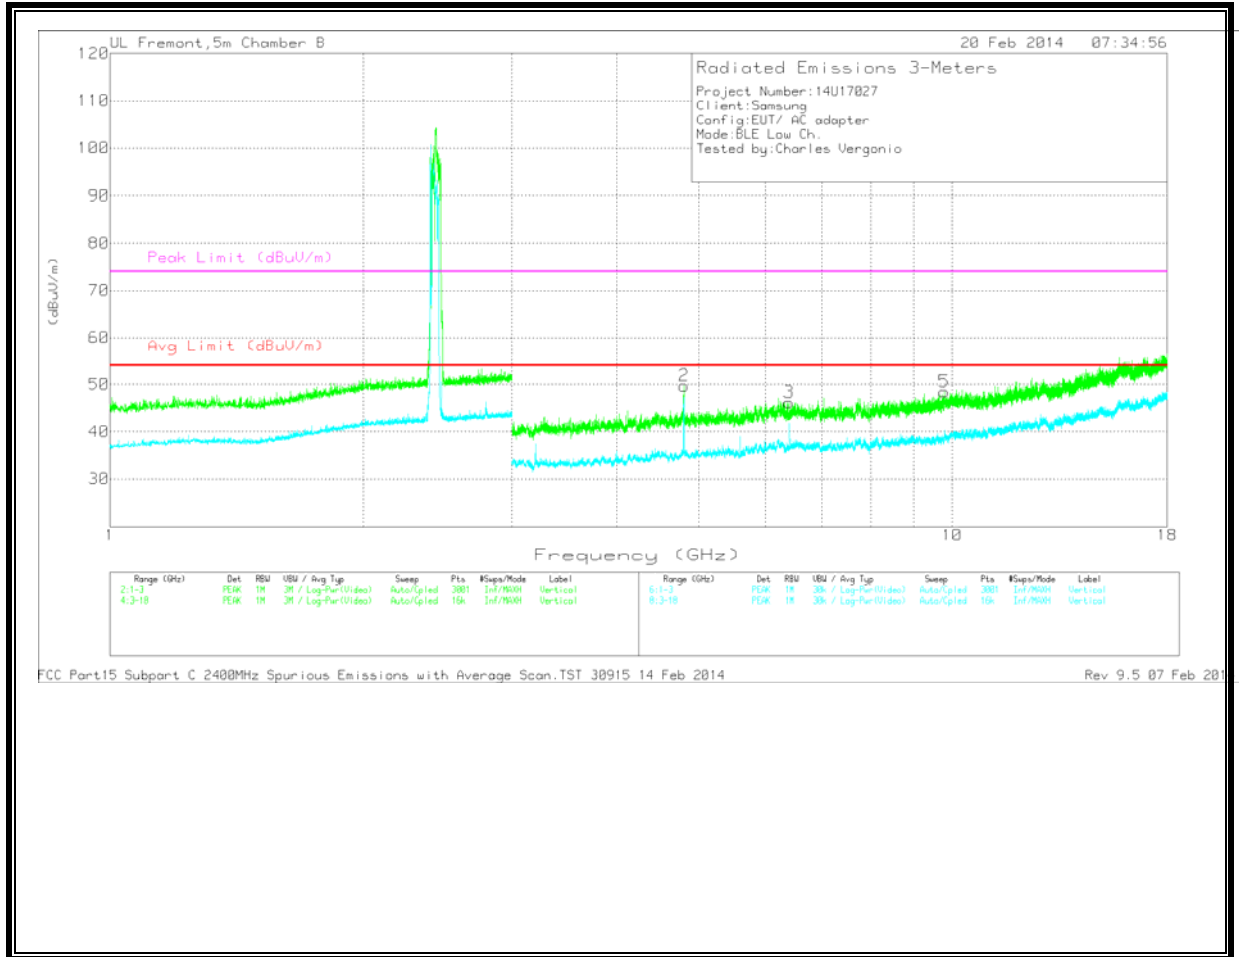

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA  
 Trace Markers

| Marker | Frequenc<br>y<br>(GHz) | Meter<br>Readin<br>g<br>(dBuV) | Det | AF T345<br>(dB/m) | Amp/Cbl/<br>Filtr/Pad<br>(dB) | Correcte<br>d<br>Reading<br>(dBuV/m) | Avg Limit<br>(dBuV/m) | Margin<br>(dB) | Peak<br>Limit<br>(dBuV/m) | PK<br>Margin<br>(dB) | Azimuth<br>(Degs) | Height<br>(cm) | Polarity |
|--------|------------------------|--------------------------------|-----|-------------------|-------------------------------|--------------------------------------|-----------------------|----------------|---------------------------|----------------------|-------------------|----------------|----------|
| 4      | * 8.13                 | 37.22                          | PK  | 36.1              | -26.3                         | 47.02                                | 54                    | -6.98          | 74                        | -26.98               | 0-360             | 202            | H        |
| 2      | * 4.804                | 43.79                          | PK  | 34.7              | -28.8                         | 49.69                                | 54                    | -4.31          | 74                        | -24.31               | 0-360             | 202            | V        |
| 1      | 3.211                  | 40.24                          | PK  | 33.3              | -31.1                         | 42.44                                | -                     | -              | 74                        | -31.56               | 0-360             | 99             | H        |
| 3      | 6.4                    | 39.17                          | PK  | 35.9              | -28.9                         | 46.17                                | -                     | -              | 74                        | - 27.83              | 0-360             | 99             | V        |
| 5      | 9.783                  | 34.53                          | PK  | 37.5              | -23.6                         | 48.43                                | -                     | -              | 74                        | -25.57               | 0-360             | 99             | V        |

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK - Peak detector

Radiated Emissions

| Frequenc<br>y<br>(GHz) | Meter<br>Reading<br>(dBuV) | Det  | AF T345<br>(dB/m) | Amp/Cbl/<br>Filtr/Pad<br>(dB) | Correcte<br>d<br>Reading<br>(dBuV/m) | Avg Limit<br>(dBuV/m) | Margin<br>(dB) | Peak<br>Limit<br>(dBuV/m) | PK<br>Margin<br>(dB) | Azimuth<br>(Degs) | Height<br>(cm) | Polarity |
|------------------------|----------------------------|------|-------------------|-------------------------------|--------------------------------------|-----------------------|----------------|---------------------------|----------------------|-------------------|----------------|----------|
| * 4.8                  | 40.31                      | MAv1 | 34.7              | -28.8                         | 46.21                                | 54                    | -7.79          | -                         | -                    | 293               | 280            | H        |


\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

MID CHANNEL  
 HORIZONTAL

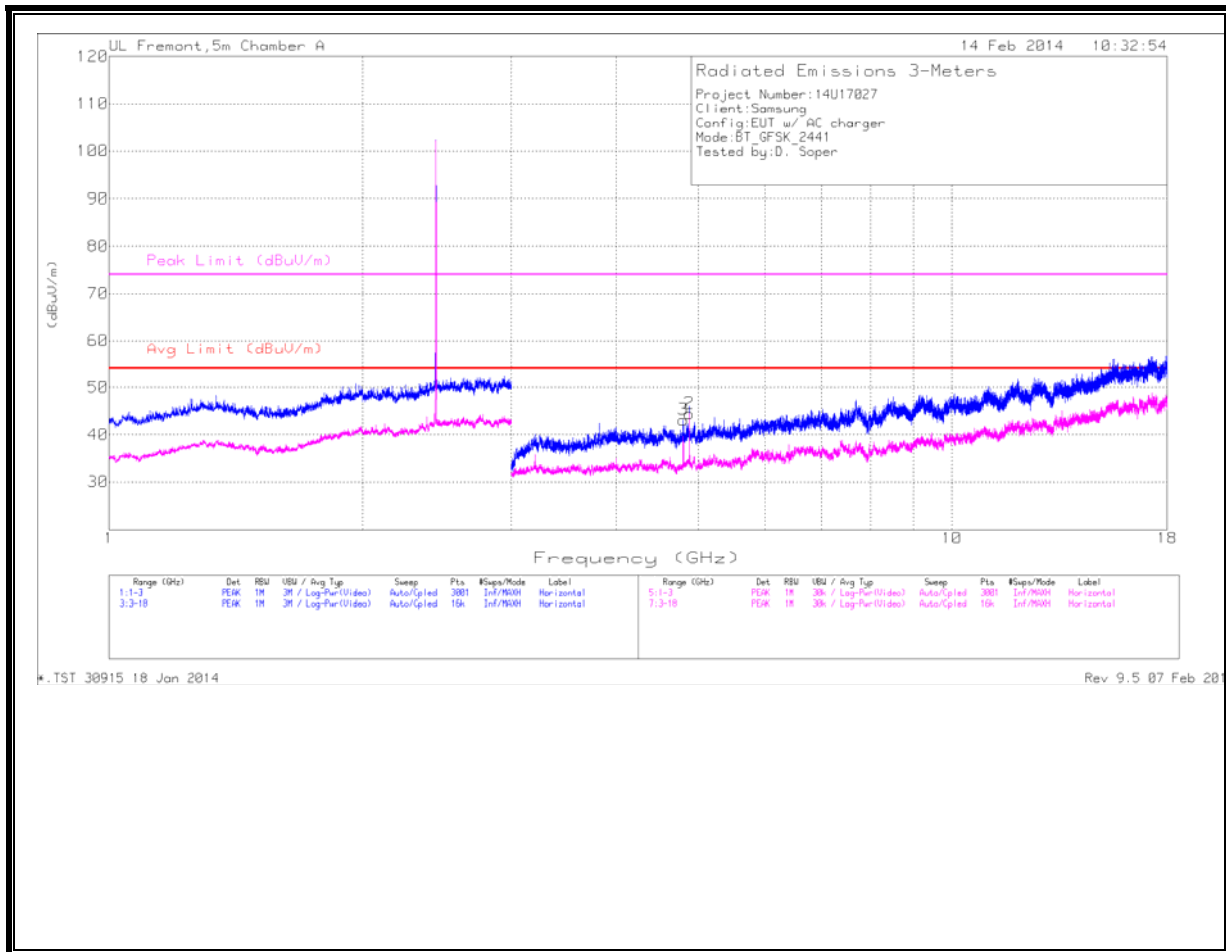

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

VERTICAL

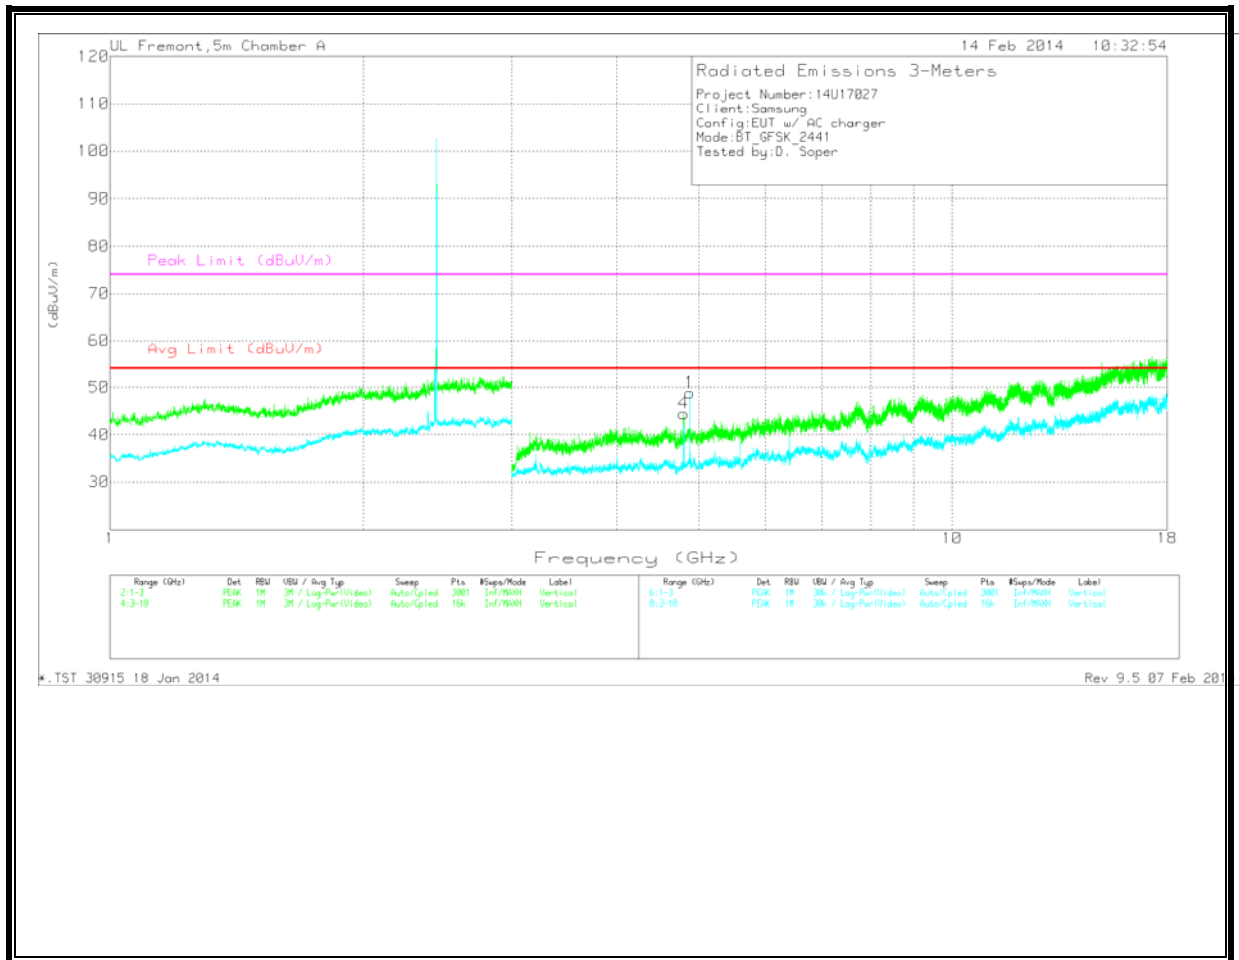

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL DATA

| Marker | Frequency<br>(GHz) | Meter<br>Reading<br>(dBuV) | Det | AF T136<br>(dB/m) | Amp/Cbl/F<br>ltr/Pad<br>(dB) | Corrected<br>Reading<br>(dBuV/m) | Avg Limit<br>(dBuV/m) | Margin<br>(dB) | Peak Limit<br>(dBuV/m) | PK Margin<br>(dB) | Azimuth<br>(Degs) | Height<br>(cm) | Polarity |
|--------|--------------------|----------------------------|-----|-------------------|------------------------------|----------------------------------|-----------------------|----------------|------------------------|-------------------|-------------------|----------------|----------|
| 3      | * 4.8              | 39.43                      | PK  | 33.9              | -30.2                        | 43.13                            | -                     | -              | 74                     | -30.87            | 0-360             | 200            | H        |
| 4      | * 4.8              | 40.78                      | PK  | 33.9              | -30.2                        | 44.48                            | -                     | -              | 74                     | -29.52            | 0-360             | 101            | V        |
| 2      | * 4.882            | 38.84                      | Avg | 34                | -28.4                        | 44.44                            | 54                    | -9.56          | -                      | -                 | 0-360             | 200            | H        |
| 1      | * 4.882            | 43.19                      | Avg | 34                | -28.4                        | 48.79                            | 54                    | -5.21          | -                      | -                 | 0-360             | 200            | V        |

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector


| Frequency<br>(GHz) | Meter<br>Reading<br>(dBuV) | Det  | AF T136<br>(dB/m) | Amp/Cbl/<br>Filtr/Pad<br>(dB) | Corrected<br>Reading<br>(dBuV/m) | Avg Limit<br>(dBuV/m) | Margin<br>(dB) | Peak Limit<br>(dBuV/m) | PK Margin<br>(dB) | Azimuth<br>(Degs) | Height<br>(cm) | Polarity |
|--------------------|----------------------------|------|-------------------|-------------------------------|----------------------------------|-----------------------|----------------|------------------------|-------------------|-------------------|----------------|----------|
| * 4.882            | 38.32                      | MAv1 | 34                | -28.3                         | 44.02                            | 54                    | -9.98          | -                      | -                 | 62                | 288            | V        |

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

MAv1 - KDB558074 Option 1 Maximum RMS Average




HIGH CHANNEL  
 HORIZONTAL

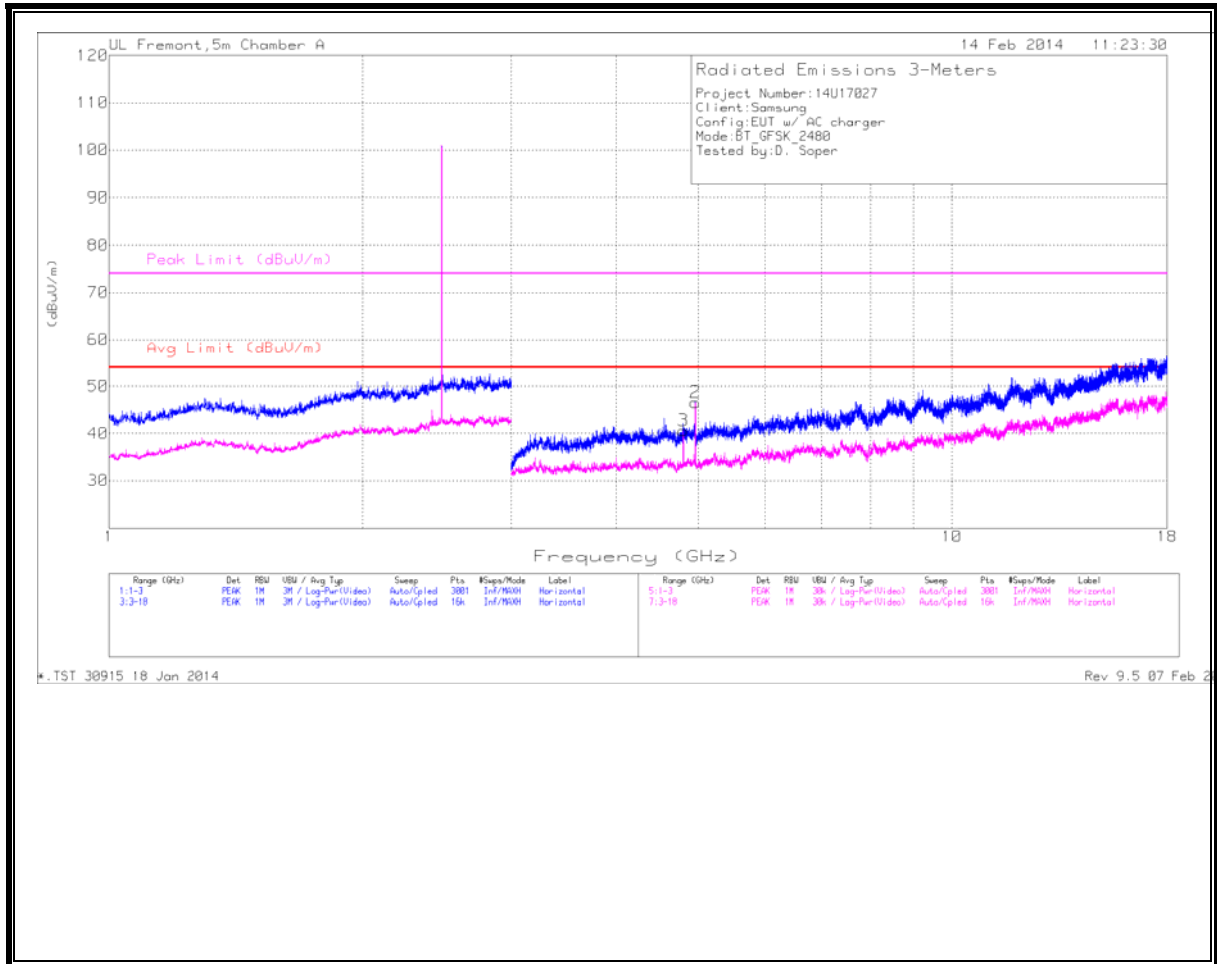

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

VERTICAL

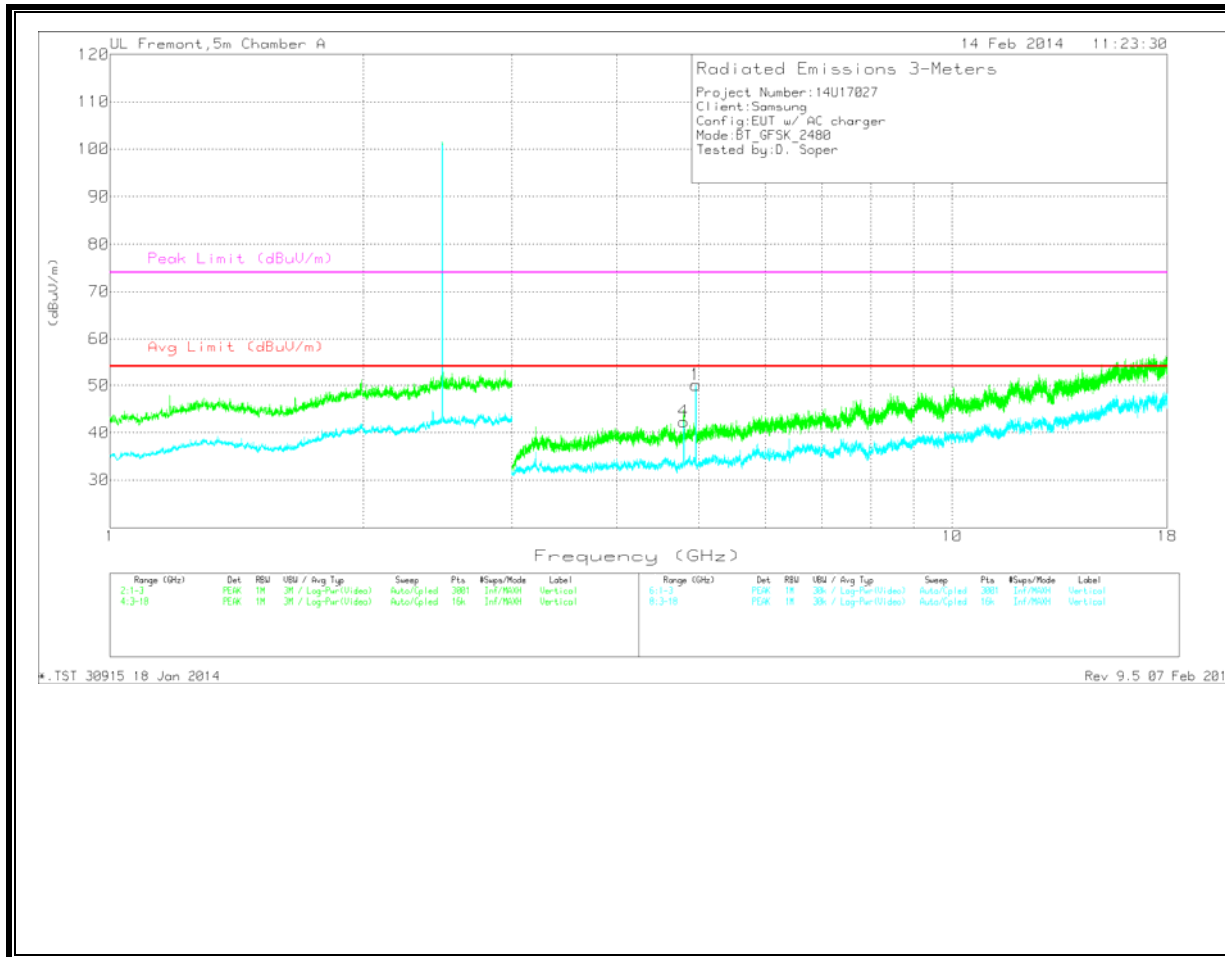

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA



| Marker | Frequency<br>(GHz) | Meter<br>Reading<br>(dBuV) | Det | AF T136<br>(dB/m) | Amp/Cbl/F<br>ltr/Pad<br>(dB) | Corrected<br>Reading<br>(dBuV/m) | Avg Limit<br>(dBuV/m) | Margin<br>(dB) | Peak Limit<br>(dBuV/m) | PK Margin<br>(dB) | Azimuth<br>(Degs) | Height<br>(cm) | Polarity |
|--------|--------------------|----------------------------|-----|-------------------|------------------------------|----------------------------------|-----------------------|----------------|------------------------|-------------------|-------------------|----------------|----------|
| 3      | 4.8                | 36.88                      | PK  | 33.9              | -30.2                        | 40.58                            | -                     | -              | 74                     | -33.42            | 0-360             | 200            | H        |
| 4      | 4.8                | 38.63                      | Avg | 33.9              | -30.2                        | 42.33                            | 54                    | -11.67         | -                      | -                 | 0-360             | 200            | V        |
| 2      | 4.96               | 42.35                      | Avg | 33.9              | -29.7                        | 46.55                            | 54                    | -7.45          | -                      | -                 | 0-360             | 200            | H        |
| 1      | 4.96               | 45.9                       | Avg | 33.9              | -29.7                        | 50.1                             | 54                    | -3.9           | -                      | -                 | 0-360             | 200            | V        |

| Frequency<br>(GHz) | Meter<br>Reading<br>(dBuV) | Det  | AF T136<br>(dB/m) | Amp/Cbl/<br>Fltr/Pad<br>(dB) | Corrected<br>Reading<br>(dBuV/m) | Avg Limit<br>(dBuV/m) | Margin<br>(dB) | Peak Limit<br>(dBuV/m) | PK Margin<br>(dB) | Azimuth<br>(Degs) | Height<br>(cm) | Polarity |
|--------------------|----------------------------|------|-------------------|------------------------------|----------------------------------|-----------------------|----------------|------------------------|-------------------|-------------------|----------------|----------|
| 4.96               | 41.16                      | MAv1 | 33.9              | -29.7                        | 45.36                            | 54                    | -8.64          | -                      | -                 | 263               | 185            | V        |



MAv1 - KDB558074 Option 1 Maximum RMS Average

### 9.2.2. ENHANCED DATA RATE 8PSK MODULATION



#### RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

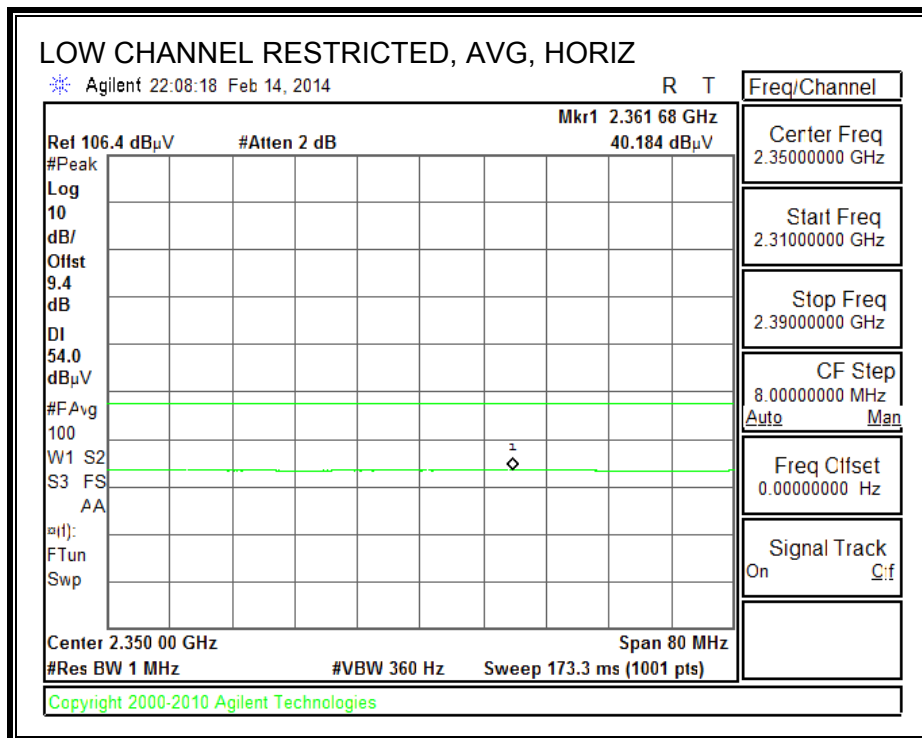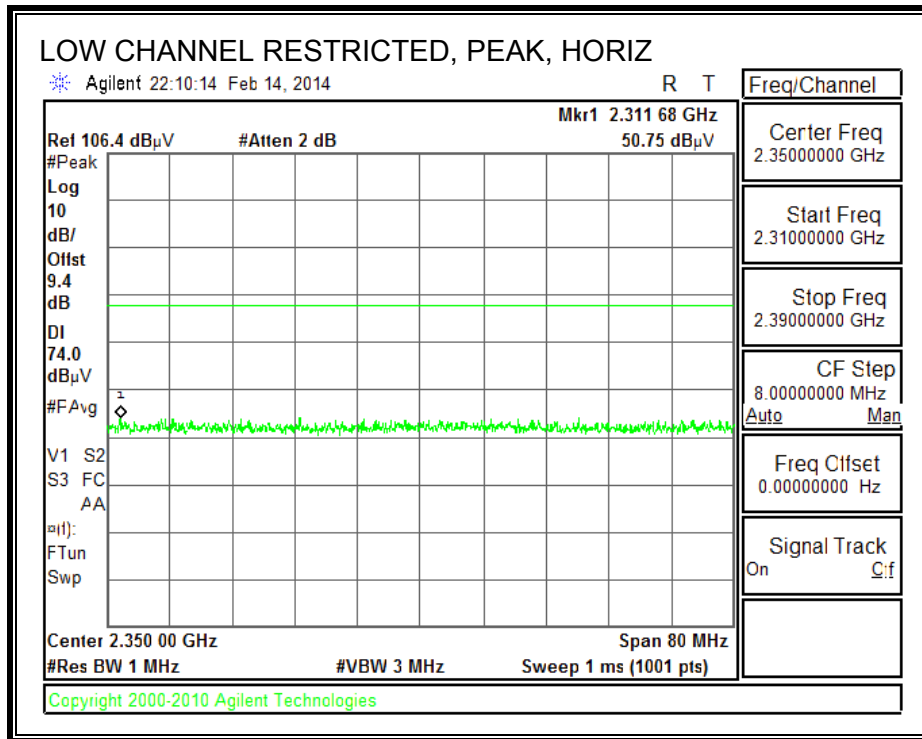



**RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)**

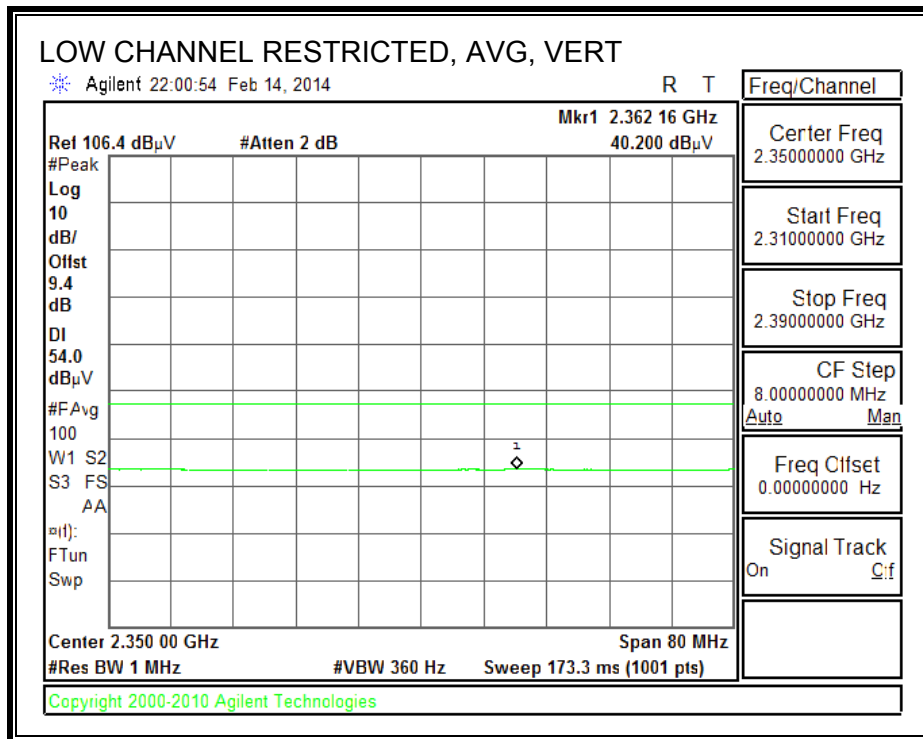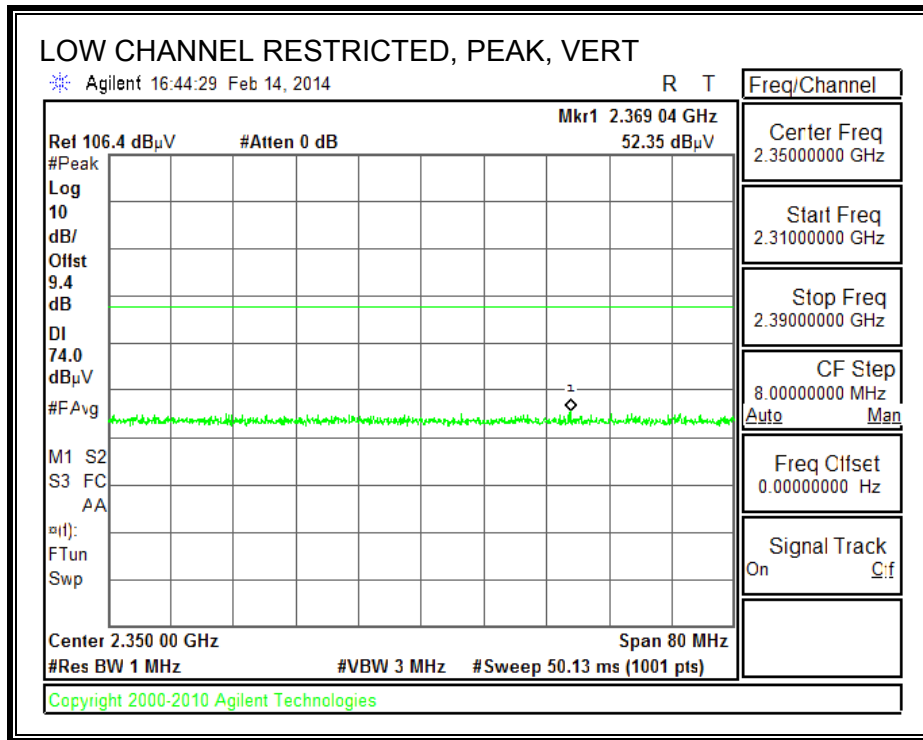

**RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)**

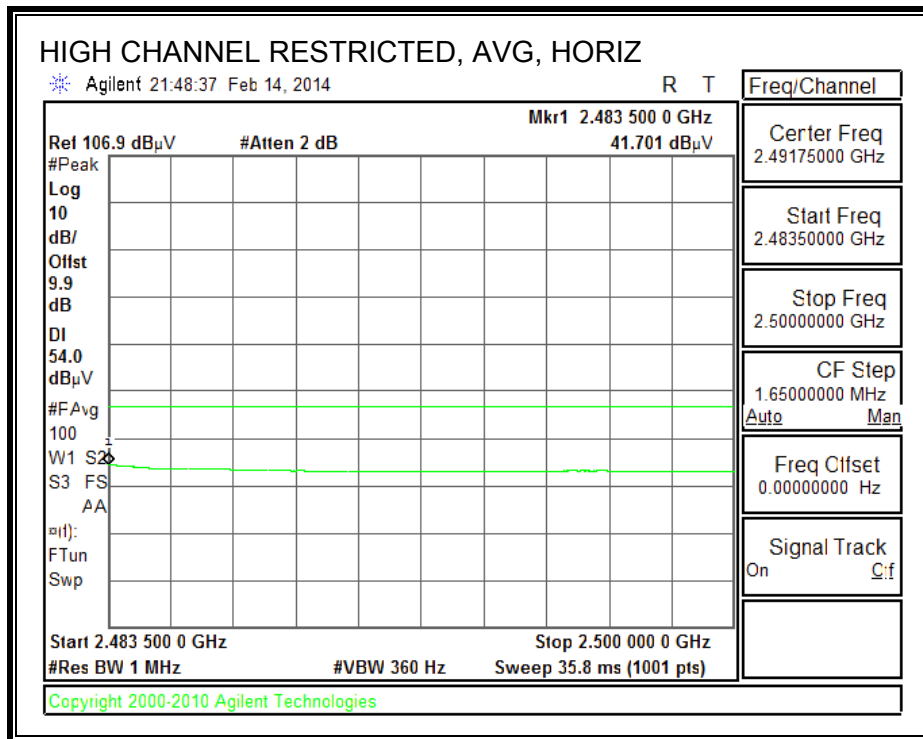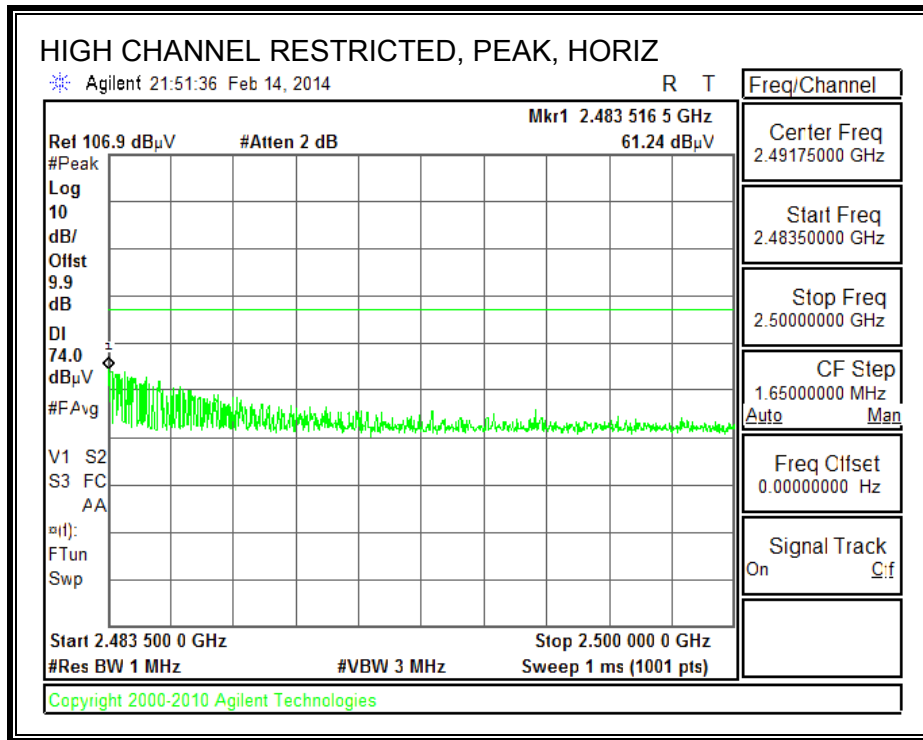


**RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)**

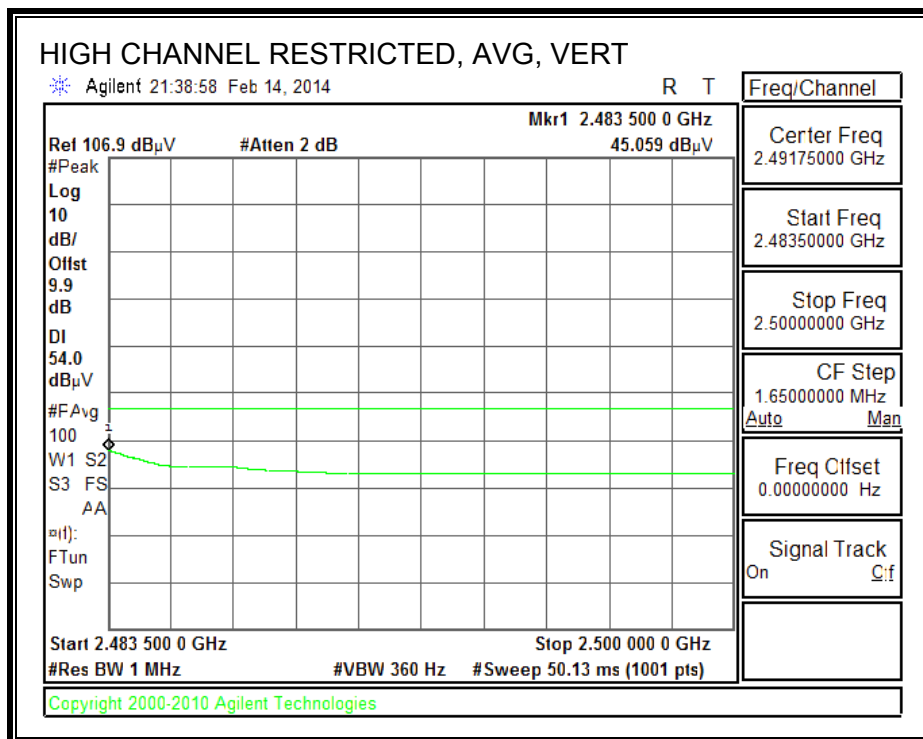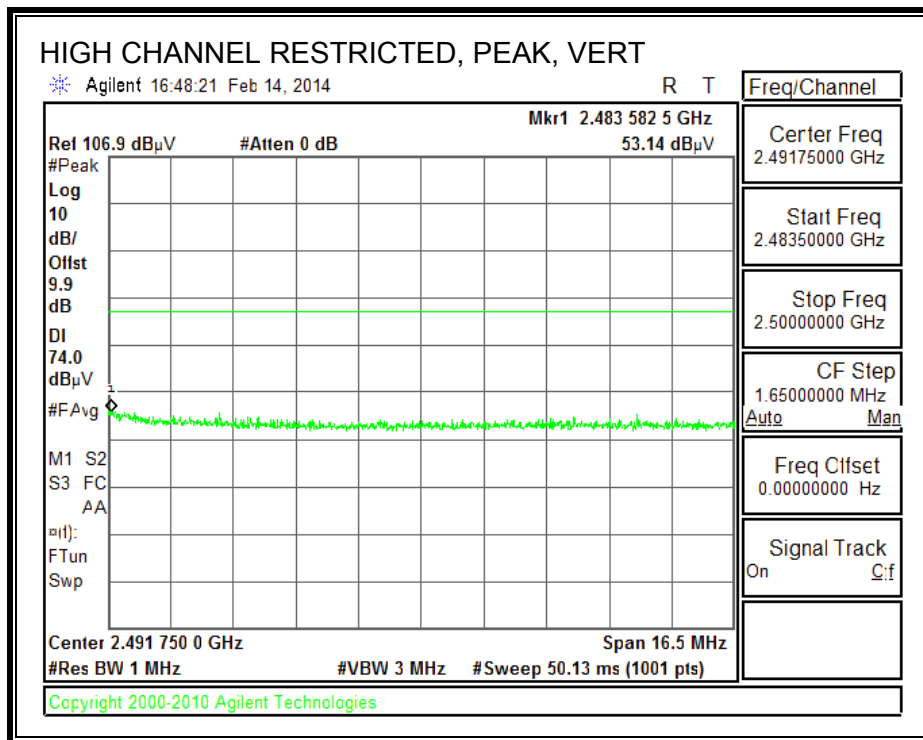

**HARMONICS AND SPURIOUS EMISSIONS**


**LOW CHANNEL  
 HORIZONTAL**

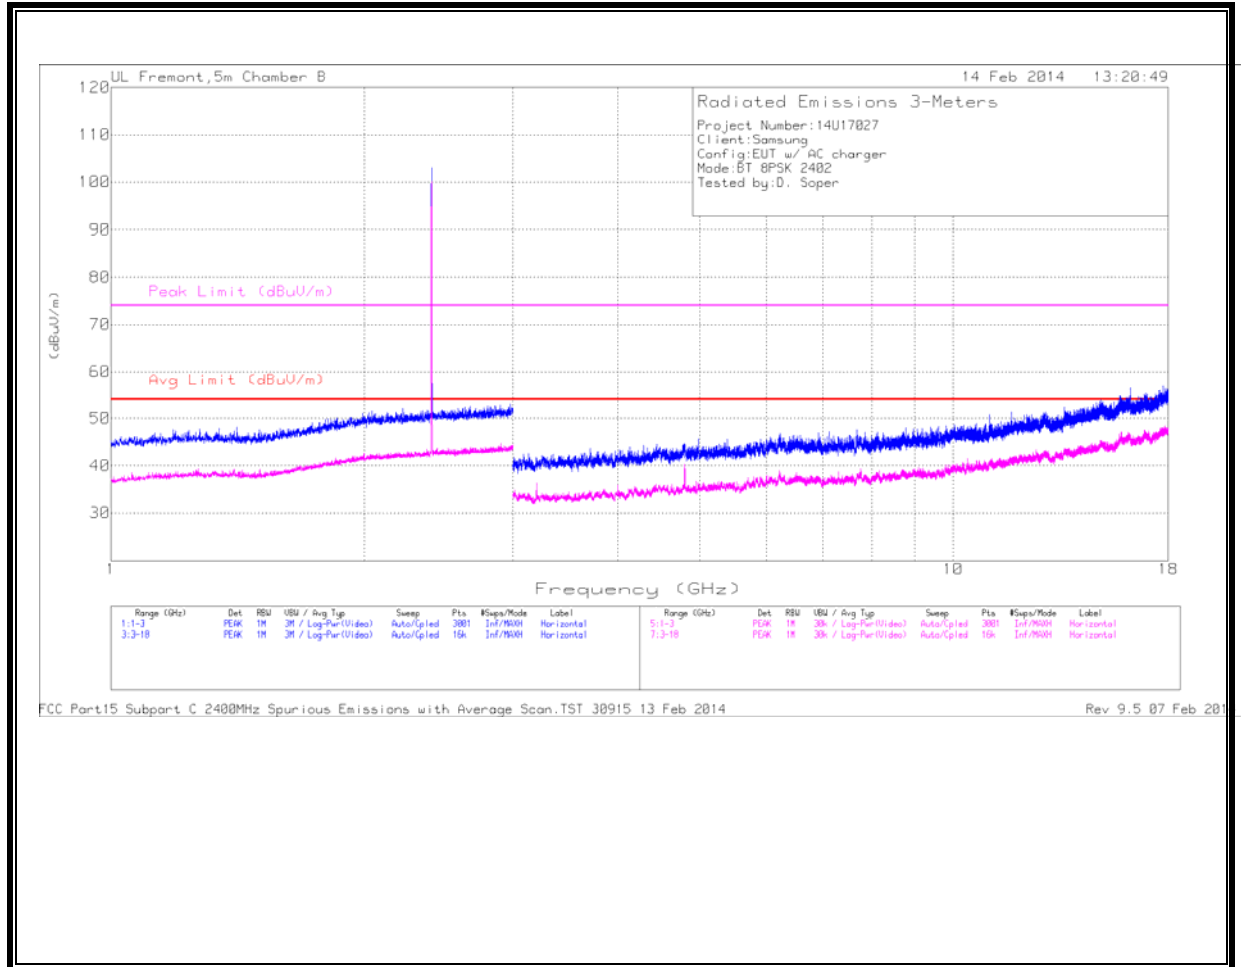

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.



VERTICAL

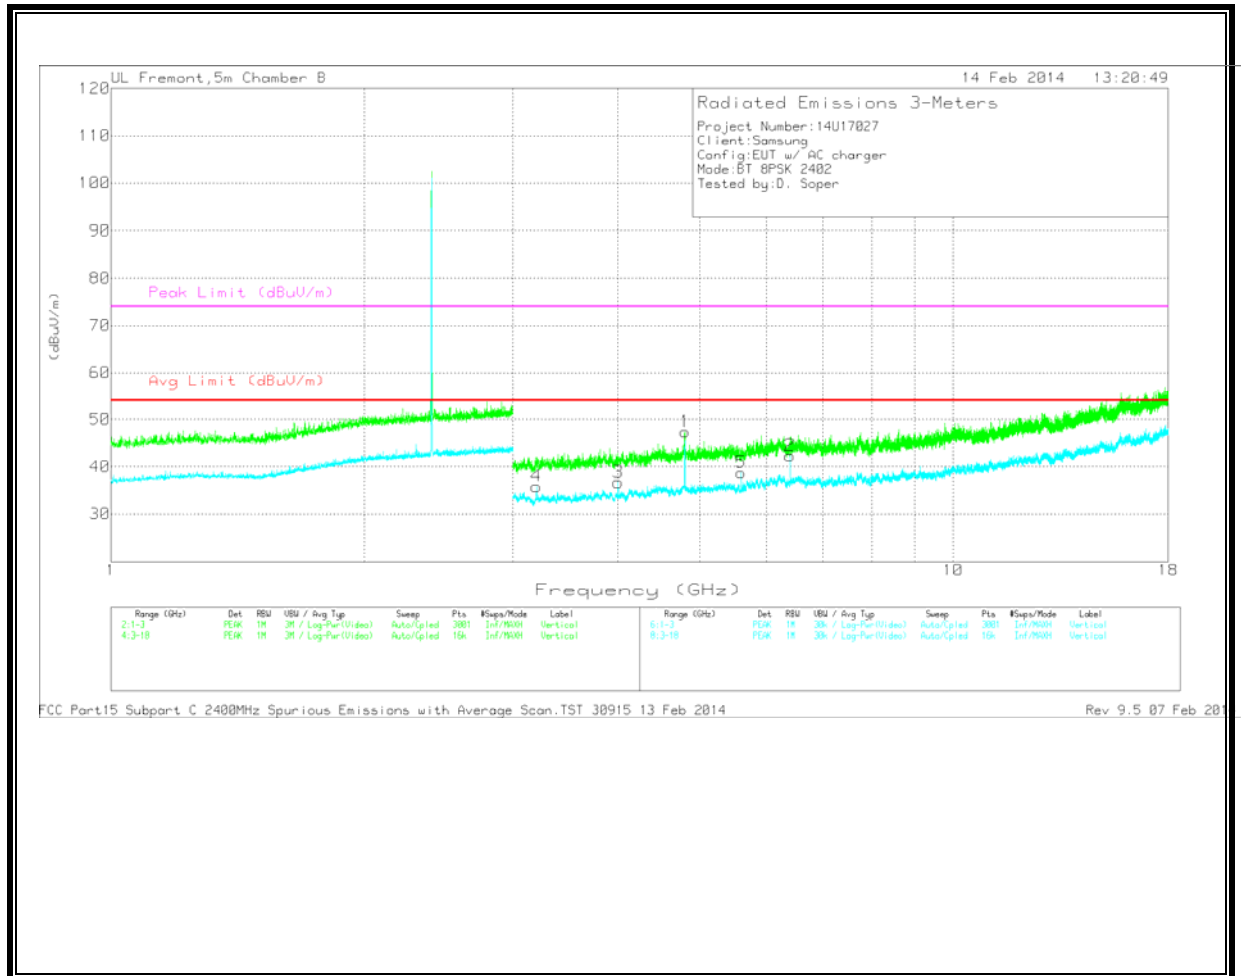

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.


LOW CHANNEL DATA

| Marker | Frequency<br>(GHz) | Meter<br>Reading<br>(dBuV) | Det | AFT345<br>(dB/m) | Amp/Cb/F<br>ltr/Pad<br>(dB) | Corrected<br>Reading<br>(dBuV/m) | Avg Limit<br>(dBuV/m) | Margin<br>(dB) | Peak Limit<br>(dBuV/m) | PK Margin<br>(dB) | Azimuth<br>(Degs) | Height<br>(cm) | Polarity |
|--------|--------------------|----------------------------|-----|------------------|-----------------------------|----------------------------------|-----------------------|----------------|------------------------|-------------------|-------------------|----------------|----------|
| 1      | * 4.804            | 41.47                      | PK  | 34.7             | -28.8                       | 47.37                            | 54                    | -6.63          | 74                     | -26.63            | 0-360             | 202            | V        |
| 3      | * 4                | 33.89                      | Avg | 33.9             | -31.1                       | 36.69                            | 54                    | -17.31         | -                      | -                 | 0-360             | 99             | V        |
| 4      | 3.2                | 33.73                      | Avg | 33.3             | -31.2                       | 35.83                            | 54                    | -18.17         | -                      | -                 | 0-360             | 202            | V        |
| 5      | 5.6                | 33.15                      | Avg | 35               | -29.4                       | 38.75                            | 54                    | -15.25         | -                      | -                 | 0-360             | 202            | V        |
| 2      | 6.4                | 35.33                      | Avg | 35.9             | -28.9                       | 42.33                            | 54                    | -11.67         | -                      | -                 | 0-360             | 99             | V        |

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK - Peak detector

MID CHANNEL  
 HORIZONTAL

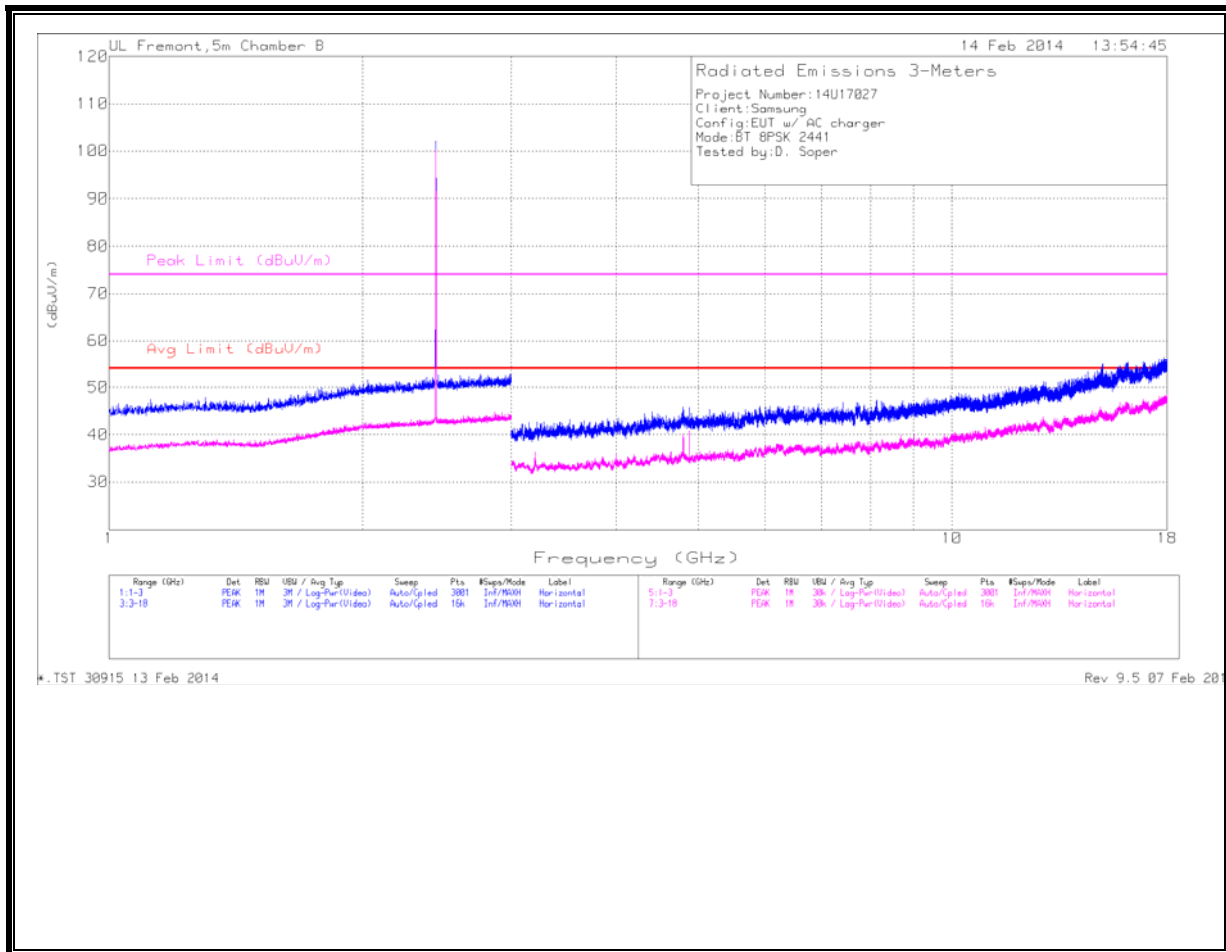

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

VERTICAL

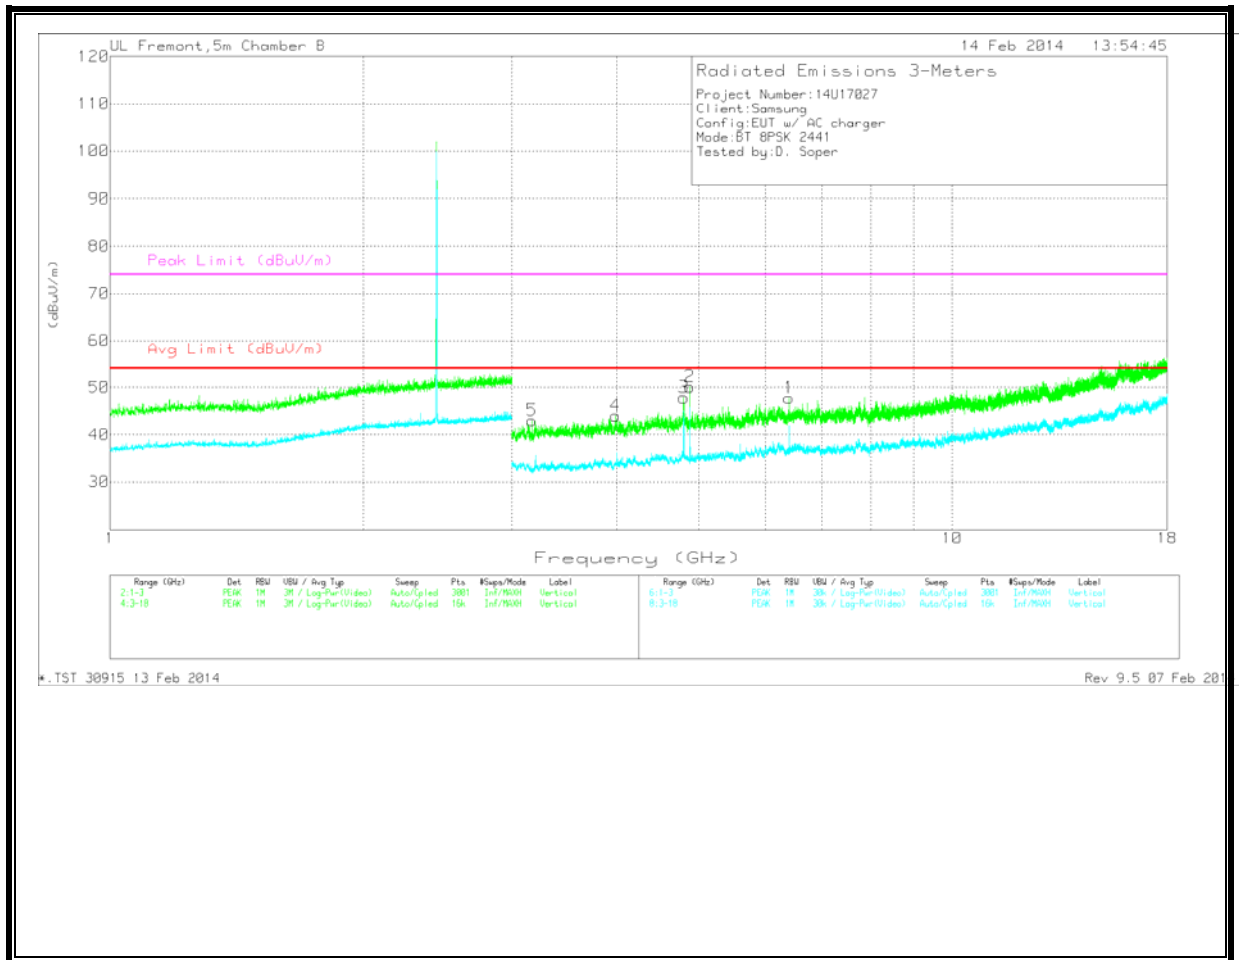

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL DATA

| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | AF T345 (dB/m) | Amp/Cbl/Filtr/Pad (dB) | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|----------------|------------------------|----------------------------|--------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 2      | * 4.882         | 46.11                | PK  | 34.6           | -30.6                  | 50.11                      | 54                 | -3.89       | 74                  | -23.89         | 0-360          | 202         | V        |
| 3      | * 4.8           | 41.94                | PK  | 34.7           | -28.8                  | 47.84                      | 54                 | -6.16       | 74                  | -26.16         | 0-360          | 99          | V        |
| 4      | * 3.985         | 41.1                 | PK  | 33.9           | -31                    | 44                         | 54                 | -10         | 74                  | -30            | 0-360          | 99          | V        |
| 5      | 3.171           | 41.06                | PK  | 33.2           | -31.3                  | 42.96                      | -                  | -           | 74                  | -31.04         | 0-360          | 99          | V        |
| 1      | 6.4             | 40.75                | PK  | 35.9           | -28.9                  | 47.75                      | -                  | -           | 74                  | -26.25         | 0-360          | 99          | V        |

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


| Frequency (GHz) | Meter Reading (dBuV) | Det  | AF T345 (dB/m) | Amp/Cbl/Filtr/Pad (dB) | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|-----------------|----------------------|------|----------------|------------------------|----------------------------|--------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| * 4.882         | 47.77                | PK2  | 34.6           | -30.6                  | 51.77                      |                    |             | 74                  | -22.23         | 162            | 248         | V        |
| * 4.882         | 40.94                | MAv1 | 34.6           | -30.6                  | 44.94                      | 54                 | -9.06       | -                   | -              | 162            | 248         | V        |

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK2 - KDB558074 Method: Maximum Peak


MAv1 - KDB558074 Option 1 Maximum RMS Average

HIGH CHANNEL  
 HORIZONTAL

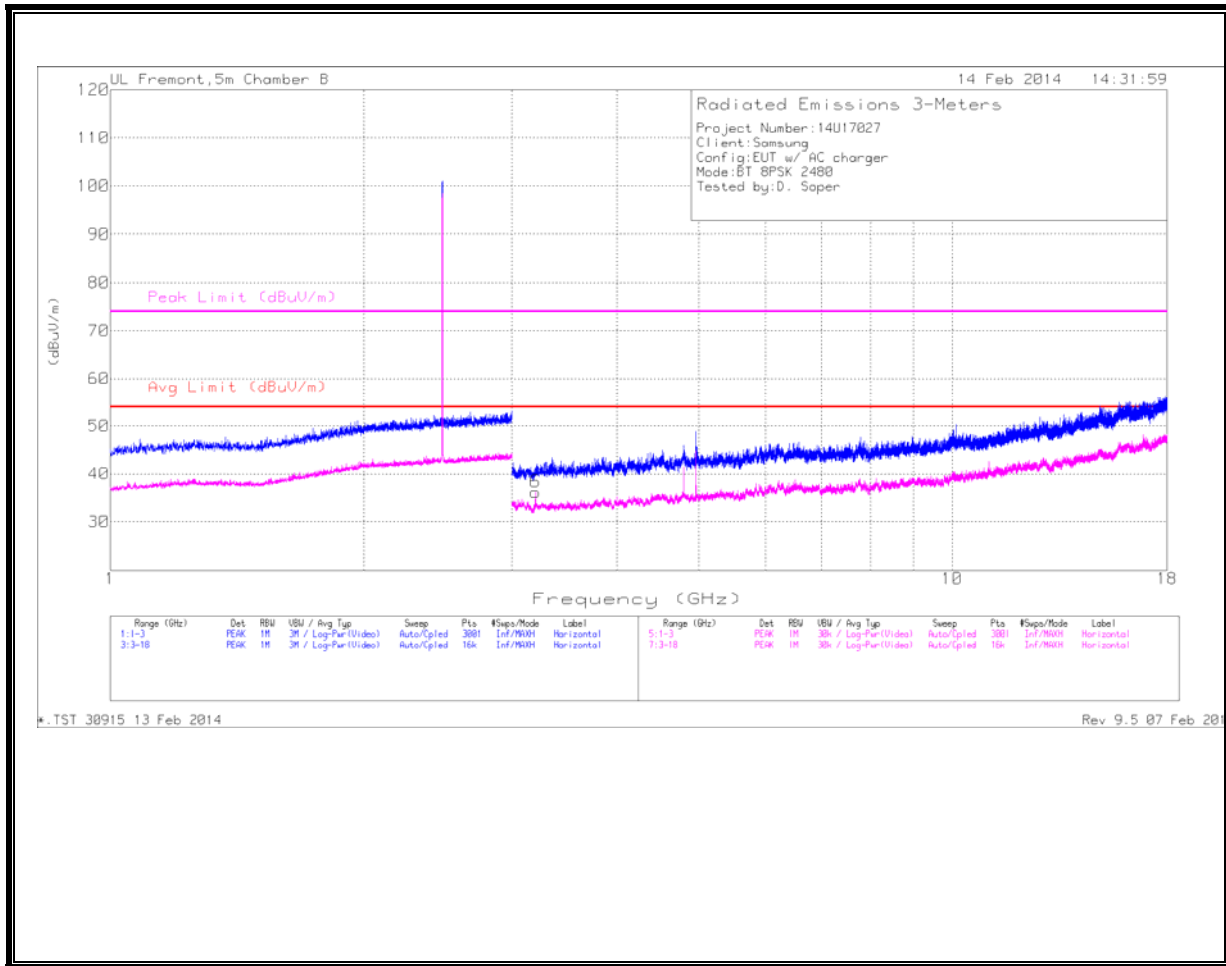

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

VERTICAL

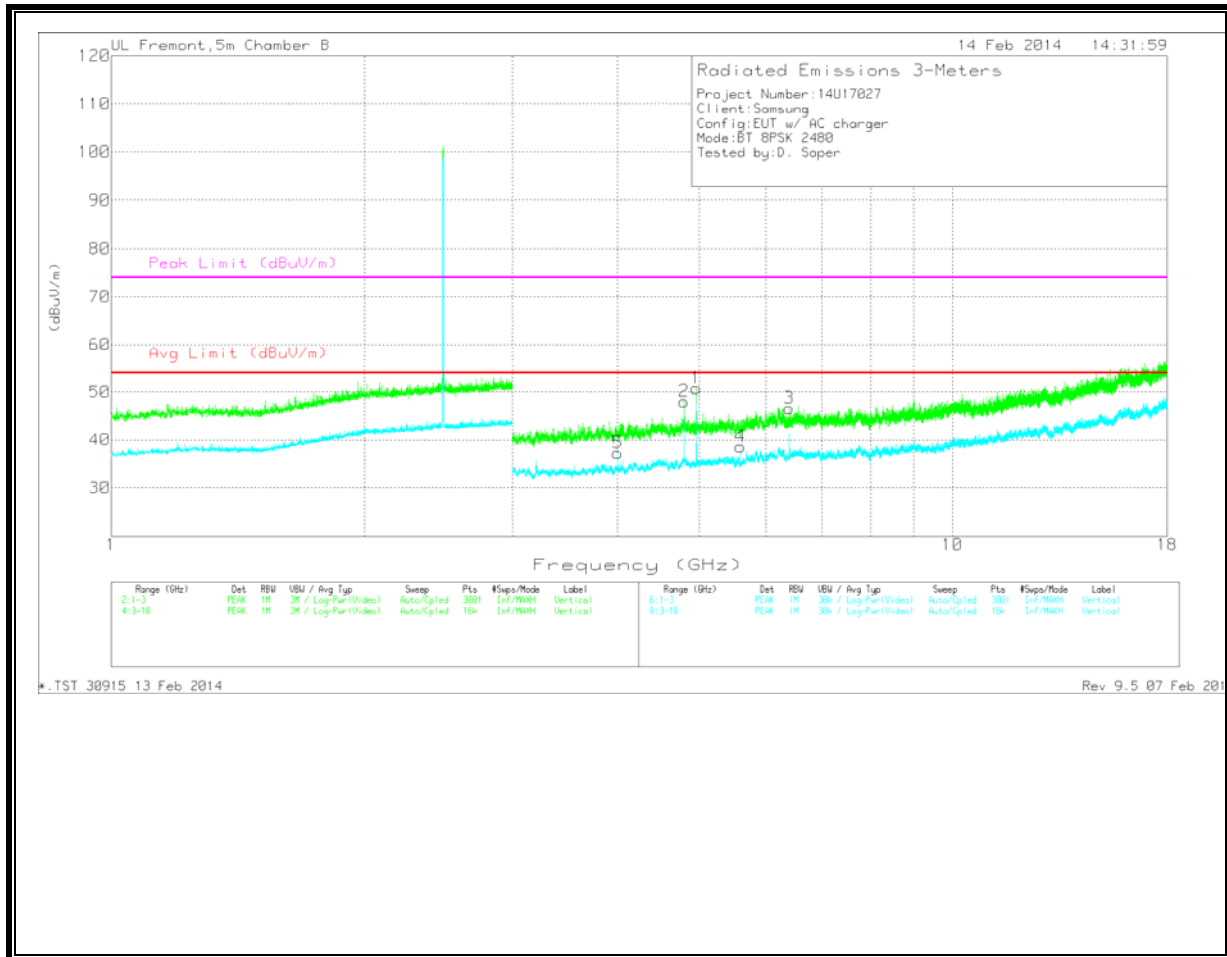

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA

| Marker | Frequency<br>(GHz) | Meter<br>Reading<br>(dBuV) | Det | AF T345<br>(dB/m) | Amp/Cbl/F<br>ltr/Pad<br>(dB) | Corrected<br>Reading<br>(dBuV/m) | Avg Limit<br>(dBuV/m) | Margin<br>(dB) | Peak Limit<br>(dBuV/m) | PK Margin<br>(dB) | Azimuth<br>(Degs) | Height<br>(cm) | Polarity |
|--------|--------------------|----------------------------|-----|-------------------|------------------------------|----------------------------------|-----------------------|----------------|------------------------|-------------------|-------------------|----------------|----------|
| 1      | * 4.96             | 46.4                       | PK  | 34.6              | -30.2                        | 50.8                             | 54                    | -3.2           | 74                     | -23.2             | 0-360             | 202            | V        |
| 2      | * 4.8              | 42.09                      | PK  | 34.7              | -28.8                        | 47.99                            | 54                    | -6.01          | 74                     | -26.01            | 0-360             | 202            | V        |
| 5      | * 4                | 34.47                      | Avg | 33.9              | -31.1                        | 37.27                            | 54                    | -16.73         | -                      | -                 | 0-360             | 99             | V        |
| 6      | 3.2                | 34.09                      | Avg | 33.3              | -31.2                        | 36.19                            | 54                    | -17.81         | -                      | -                 | 0-360             | 202            | H        |
| 4      | 5.6                | 33.02                      | Avg | 35                | -29.4                        | 38.62                            | 54                    | -15.38         | -                      | -                 | 0-360             | 202            | V        |
| 3      | 6.399              | 39.61                      | PK  | 35.9              | -28.9                        | 46.61                            | -                     | -              | 74                     | -27.39            | 0-360             | 99             | V        |

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

Avg - Video bandwidth < Resolution bandwidth

| Frequency<br>(GHz) | Meter<br>Reading<br>(dBuV) | Det  | AF T345<br>(dB/m) | Amp/Cbl/<br>Filtr/Pad<br>(dB) | Corrected<br>Reading<br>(dBuV/m) | Avg Limit<br>(dBuV/m) | Margin<br>(dB) | Peak Limit<br>(dBuV/m) | PK Margin<br>(dB) | Azimuth<br>(Degs) | Height<br>(cm) | Polarity |
|--------------------|----------------------------|------|-------------------|-------------------------------|----------------------------------|-----------------------|----------------|------------------------|-------------------|-------------------|----------------|----------|
| * 4.96             | 49.18                      | PK2  | 34.6              | -30.2                         | 53.58                            |                       |                | 74                     | -20.42            | 270               | 253            | V        |
| * 4.96             | 43.46                      | MAv1 | 34.6              | -30.2                         | 47.86                            | 54                    | -6.14          | -                      | -                 | 270               | 253            | V        |

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK2 - KDB558074 Method: Maximum Peak


MAv1 - KDB558074 Option 1 Maximum RMS Average



### 9.3. WORST-CASE BELOW 1 GHz

#### GFSK SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

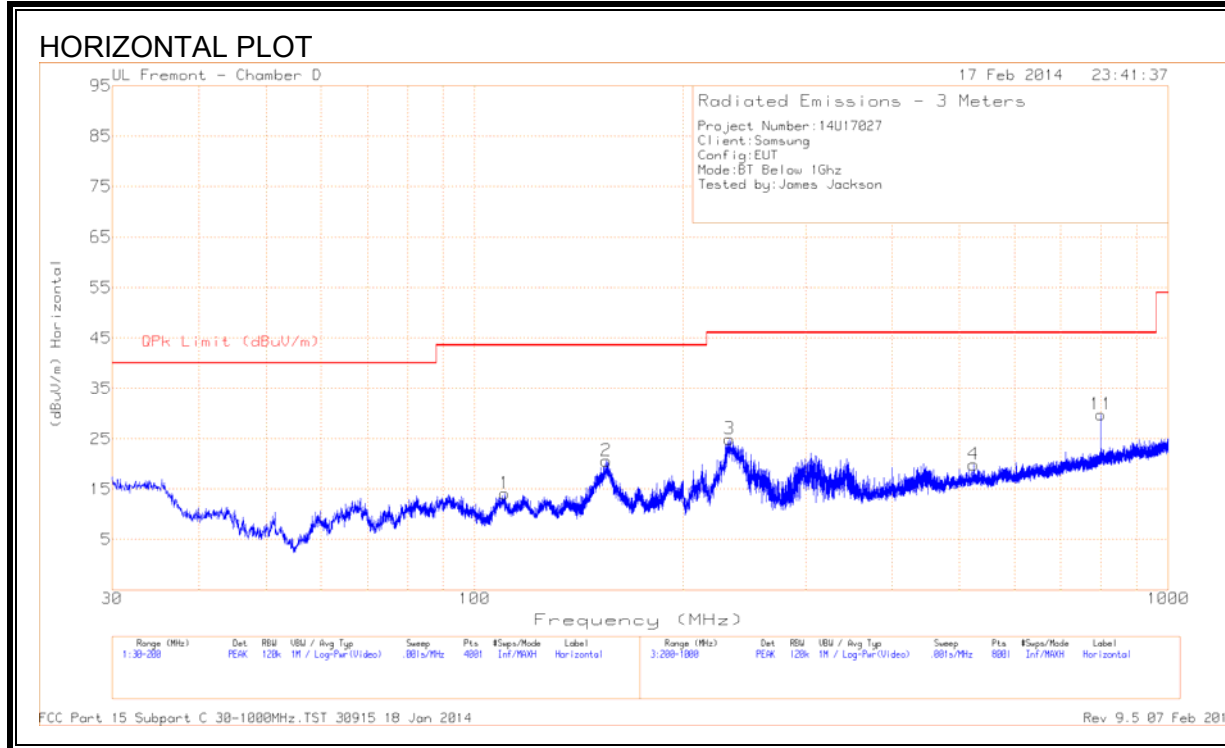

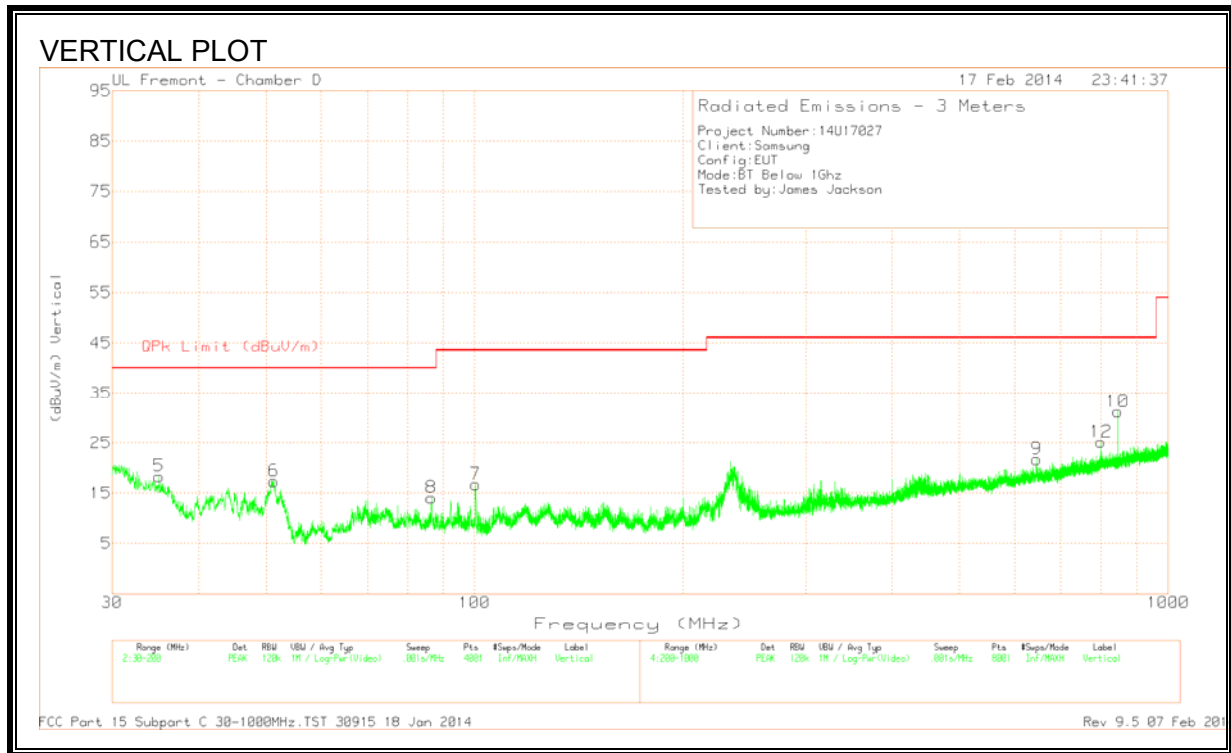

DATA

| Marker | Frequency<br>(MHz) | Meter<br>Reading<br>(dBuV) | Det | AF T407<br>dB/m | Amp/Cbl<br>(dB) | Corrected<br>Reading<br>(dBuV/m) | QPk Limit<br>(dBuV/m) | Margin<br>(dB) | Azimuth<br>(Degs) | Height<br>(cm) | Polarity |
|--------|--------------------|----------------------------|-----|-----------------|-----------------|----------------------------------|-----------------------|----------------|-------------------|----------------|----------|
| 1      | * 110.4525         | 32.71                      | PK  | 12.6            | -31.2           | 14.11                            | 43.52                 | -29.41         | 0-360             | 300            | H        |
| 5      | 35.0575            | 32.41                      | PK  | 17.6            | -31.7           | 18.31                            | 40                    | -21.69         | 0-360             | 100            | V        |
| 6      | 51.335             | 40.97                      | PK  | 7.6             | -31.2           | 17.37                            | 40                    | -22.63         | 0-360             | 100            | V        |
| 8      | 86.61              | 37.37                      | PK  | 7.7             | -31             | 14.07                            | 40                    | -25.93         | 0-360             | 100            | V        |
| 7      | 100.3375           | 38.23                      | PK  | 10.2            | -31.7           | 16.73                            | 43.52                 | -26.79         | 0-360             | 100            | V        |
| 2      | 154.865            | 39.24                      | PK  | 12.3            | -30.9           | 20.64                            | 43.52                 | -22.88         | 0-360             | 201            | H        |
| 3      | 233.1              | 44.24                      | PK  | 11.3            | -30.6           | 24.94                            | 46.02                 | -21.08         | 0-360             | 102            | H        |
| 4      | 524.2              | 31.59                      | PK  | 18.1            | -29.8           | 19.89                            | 46.02                 | -26.13         | 0-360             | 400            | H        |
| 9      | 646.4              | 31.65                      | PK  | 19.6            | -29.5           | 21.75                            | 46.02                 | -24.27         | 0-360             | 100            | V        |
| 11     | 800                | 37.3                       | PK  | 21.5            | -29             | 29.8                             | 46.02                 | -16.22         | 0-360             | 102            | H        |
| 12     | 800                | 32.66                      | PK  | 21.5            | -29             | 25.16                            | 46.02                 | -20.86         | 0-360             | 201            | V        |
| 10     | 845.9              | 38.76                      | PK  | 21.3            | -28.8           | 31.26                            | 46.02                 | -14.76         | 0-360             | 100            | V        |

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

## 10. AC POWER LINE CONDUCTED EMISSIONS

### LIMITS

FCC §15.207 (a)

RSS-Gen 7.2.2

| Frequency of Emission (MHz) | Conducted Limit (dBuV) |           |
|-----------------------------|------------------------|-----------|
|                             | Quasi-peak             | Average   |
| 0.15-0.5                    | 66 to 56*              | 56 to 46* |
| 0.5-5                       | 56                     | 46        |
| 5-30                        | 60                     | 50        |

\*Decreases with the logarithm of the frequency.

### TEST PROCEDURE


The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.4.

The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.


Line conducted data is recorded for both NEUTRAL and HOT lines.

### RESULTS

**LINE 1 RESULTS**

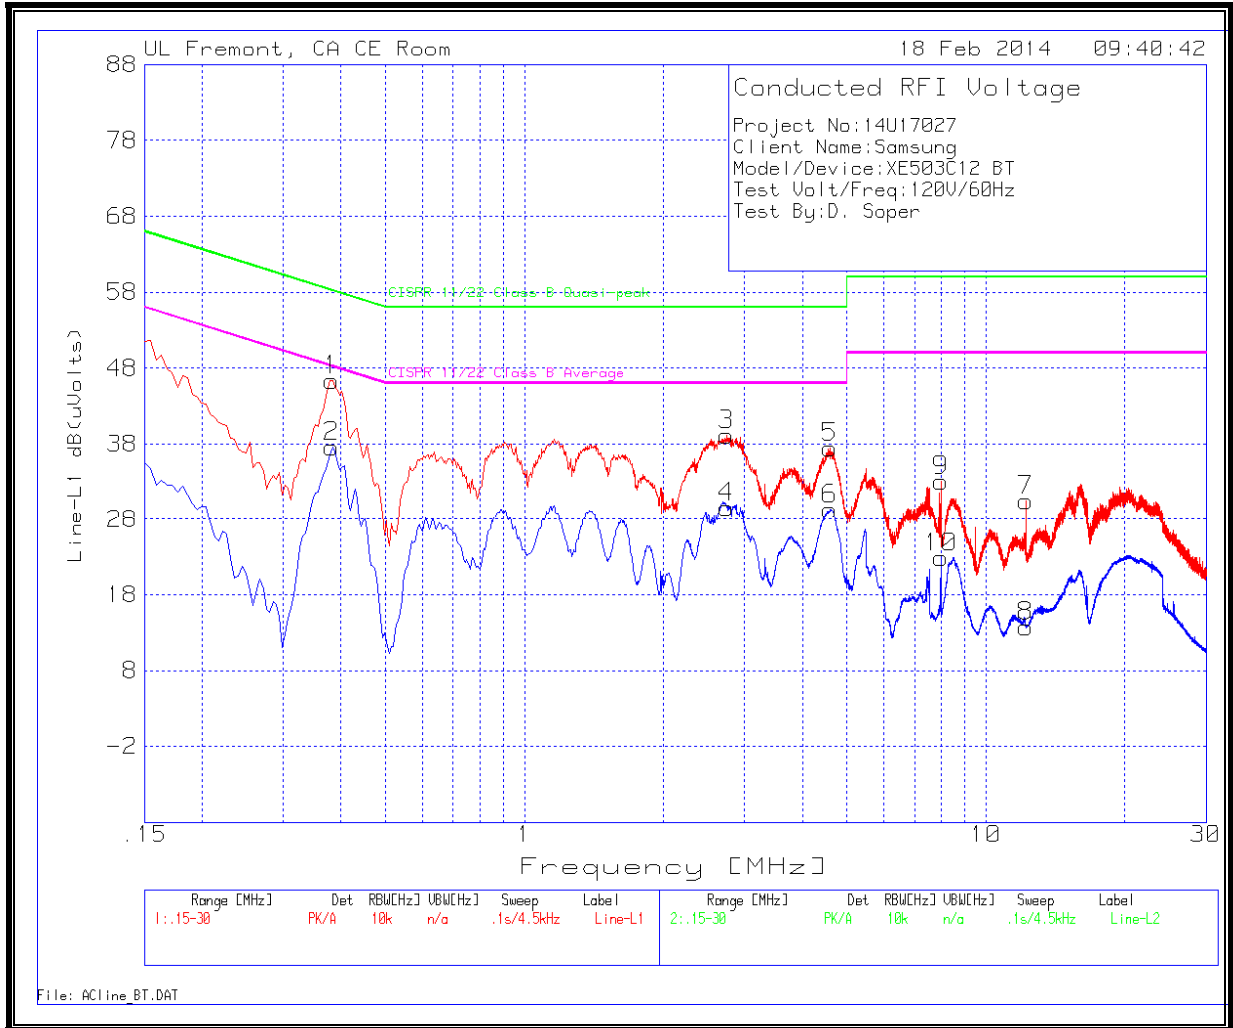

**LINE 2 RESULTS**

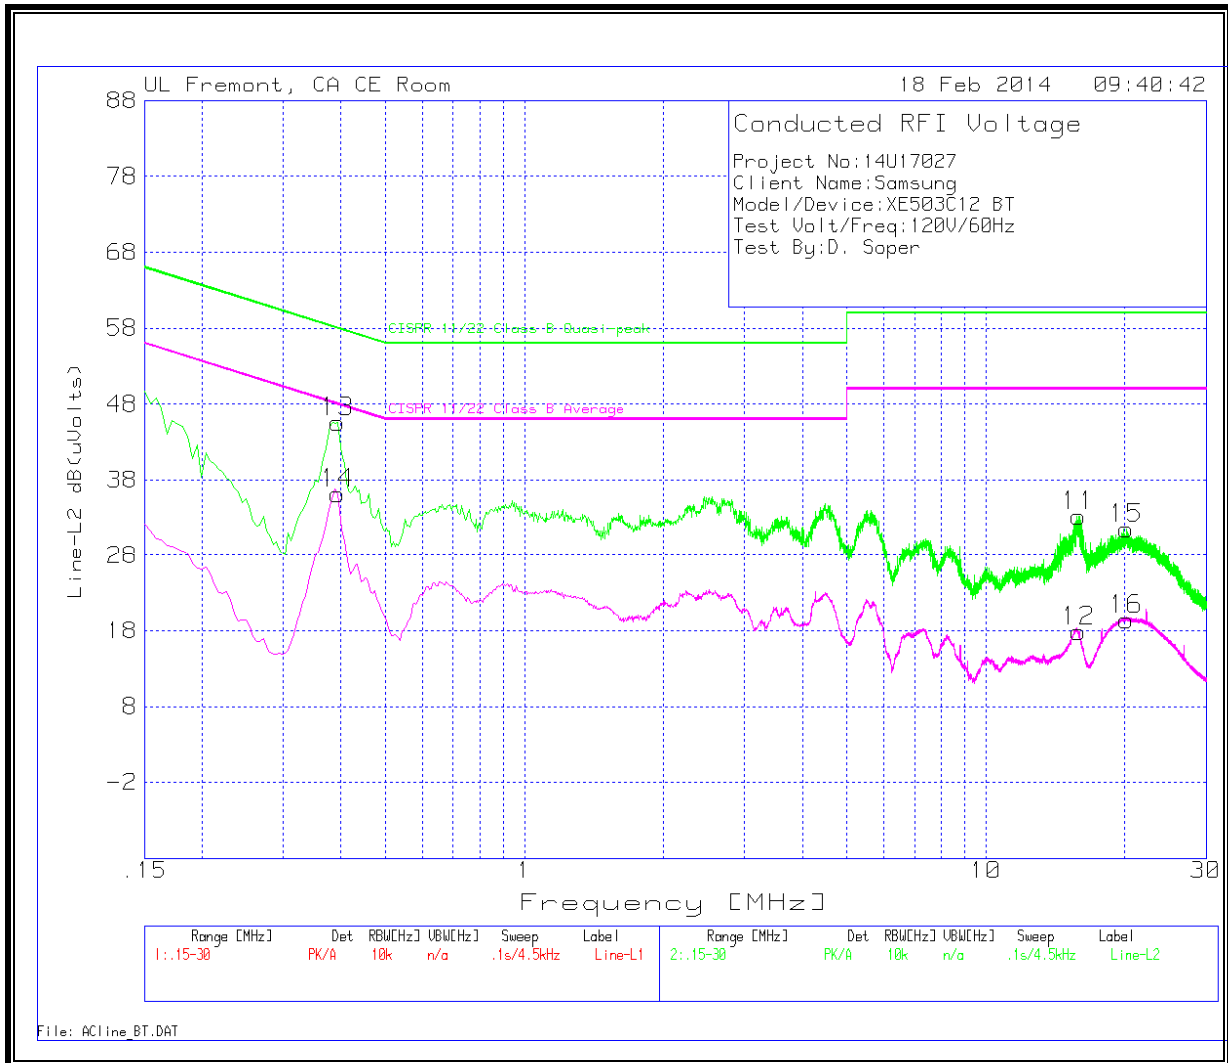

**LINE 1 150 kHz – 30MHz RESULTS**

**Trace Markers**

| Marker | Frequency (MHz) | Meter Reading (dBUV) | Det | T24 IL L1 (dB) | LC Cables 1&3 (dB) | Corrected Reading dB(uVolts) | CISPR 11/22 Class B Quasi-peak | Margin to Limit (dB) | CISPR 11/22 Class B Average | Margin to Limit (dB) |
|--------|-----------------|----------------------|-----|----------------|--------------------|------------------------------|--------------------------------|----------------------|-----------------------------|----------------------|
| 1      | .38175          | 45.91                | PK  | .4             | 0                  | 46.31                        | 58.2                           | -11.89               | -                           | -                    |
| 2      | .38175          | 37.14                | Av  | .4             | 0                  | 37.54                        | -                              | -                    | 48.2                        | -10.66               |
| 3      | 2.7465          | 38.86                | PK  | .2             | .1                 | 39.16                        | 56                             | -16.84               | -                           | -                    |
| 4      | 2.7465          | 29.31                | Av  | .2             | .1                 | 29.61                        | -                              | -                    | 46                          | -16.39               |
| 5      | 4.587           | 37.2                 | PK  | .2             | .1                 | 37.5                         | 56                             | -18.5                | -                           | -                    |
| 6      | 4.587           | 29                   | Av  | .2             | .1                 | 29.3                         | -                              | -                    | 46                          | -16.7                |
| 9      | 7.989           | 32.8                 | PK  | .2             | .1                 | 33.1                         | 60                             | -26.9                | -                           | -                    |
| 10     | 7.989           | 22.53                | Av  | .2             | .1                 | 22.83                        | -                              | -                    | 50                          | -27.17               |
| 7      | 12.21           | 30.08                | PK  | .2             | .2                 | 30.48                        | 60                             | -29.52               | -                           | -                    |
| 8      | 12.21           | 13.3                 | Av  | .2             | .2                 | 13.7                         | -                              | -                    | 50                          | -36.3                |

**LINE 2 150 kHz – 30MHz RESULTS**

**Trace Markers**

| Marker | Frequency (MHz) | Meter Reading (dBUV) | Det | T24 IL L2 (dB) | LC Cables 2&3 (dB) | Corrected Reading dB(uVolts) | CISPR 11/22 Class B Quasi-peak | Margin to Limit (dB) | CISPR 11/22 Class B Average | Margin to Limit (dB) |
|--------|-----------------|----------------------|-----|----------------|--------------------|------------------------------|--------------------------------|----------------------|-----------------------------|----------------------|
| 13     | .393            | 45.16                | PK  | .4             | 0                  | 45.56                        | 58                             | -12.44               | -                           | -                    |
| 14     | .393            | 35.8                 | Av  | .4             | 0                  | 36.2                         | -                              | -                    | 48                          | -11.8                |
| 11     | 15.8685         | 32.75                | PK  | .3             | .2                 | 33.25                        | 60                             | -26.75               | -                           | -                    |
| 12     | 15.8685         | 17.34                | Av  | .3             | .2                 | 17.84                        | -                              | -                    | 50                          | -32.16               |
| 15     | 20.1525         | 30.98                | PK  | .3             | .2                 | 31.48                        | 60                             | -28.52               | -                           | -                    |
| 16     | 20.1525         | 18.96                | Av  | .3             | .2                 | 19.46                        | -                              | -                    | 50                          | -30.54               |

PK - Peak detector

Av - average detection