



TEST REPORT

For

Applicant : RM ACQUISITIONS LLC

Address : 9855 Woods Drive Skokie. IL 60077 U.S.A

Product Name : TND Tablet

Model Name : TNBT80B, RVT80B, RET80B

Remark : Only different in model name.

Brand Name : Rand Mcnally

FCC ID : A4C-1000AA

Report No. : MTE/CEC/S16071515

Date of Issue : Jul. 19, 2016

Issued by : Most Technology Service Co., Limited

Address : No.5, 2nd Langshan Road, North District, Hi-tech Industrial Park, Nanshan, Shenzhen, Guangdong, China

Tel : 86-755-8602 6850

Fax : 86-755-2601 3350

The report consists 75 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by MOST. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver.

TABLE OF CONTENTS

1. VERIFICATION OF CONFORMITY	4
2. GENERAL INFORMATION	5
2.1 Product Information.....	5
2.2 Objective.....	5
2.3 Test Standards and Results	6
2.4 Environmental Conditions	6
3. TEST METHODOLOGY.....	7
3. 1TEST FACILITY	7
3.2 GENERAL TEST PROCEDURES	7
4. SETUP OF EQUIPMENT UNDER TEST	8
4.1 SETUP CONFIGURATION OF EUT	8
4.2 SUPPORT EQUIPMENT.....	8
4.3 TEST EQUIPMENT LIST	9
5. 47 CFR Part 15 C Requirements.....	10
5.1 RF EXPOSURE	10
5.1.1 Applicable Standard	10
5.1.2 Measurement Result	10
5.2 ANTENNA REQUIREMENT.....	11
5.2.1 Applicable Standard	11
5.2.2 Evaluation Criteria.....	11
5.2.3 Result: Compliance.....	11
5.3 AC Power Line Conducted Emission	12
5.3.1Requirement	12
5.3.2 Block Diagram of Test Setup	12
5.3.3 Test procedure.....	12
5.3.4 Test Result	12
5.4 Radiated Emission	17
5.4.1Requirement	17
5.4.2 Test Configuration	17
5.4.3 Test Procedure:.....	18
5.4.4 Test Result	19
5.5 Conducted Peak Output Power.....	34
5.5.1 Requirement	38
5.5.2 Block Diagram of Test Setup	38
5.5.3 Test Procedure	38
5.5.4 Test Result	38
5.6 6dB Emission Bandwidth	39
5.6.1 Test Requirement	39
5.6.2 Block Diagram of Test Setup	39
5.6.3 Test Procedure	39
5.6.4 Test Result	39
5.7 POWER SPECTRAL DENSITY	45
5.7.1 Applicable Standard	45
5.7.2 Block Diagram of Test Setup	45
5.7.3 Test Procedure.....	45
5.7.4 Test Result	45
5.8 Band Edge and Conducted Spurious Emissions	51

5.8.1 Test Requirement	51
5.8.2 Test Procedure	51
5.8.3 Test Result	51
5.9 Restricted Frequency Bands	59
5.9.1 Test Requirement	59
5.9.2 Test Configuration	59
5.9.3 Test Procedure:.....	59
5.9.4 Test Result	59

1. VERIFICATION OF CONFORMITY

Equipment Under Test:	TND Tablet
Brand Name:	Rand McNally
Model Number:	TNDT80B(Adapter Model:KZ0502000)
FCC ID:	A4C-1000AA
Applicant:	RM ACQUISITIONS LLC 9855 Woods Drive Skokie, IL 60077 U.S.A
Manufacturer:	SHEN ZHEN APICAL TECHNOLOGY CO., LTD. 9/F,B Building, Tinghua Unis Infoport, Langshan RD, North district, Hi-tech Industrial Park, Nanshan, Shenzhen
Technical Standards:	47 CFR Part 15 Subpart C
File Number:	MTE/CEC/S16071515
Date of test:	Jul. 01-18, 2016
Deviation:	None
Condition of Test Sample:	Normal
Test Result:	PASS

The above equipment was tested by Most Technology Service Co., Limited for compliance with the requirements set forth in FCC rules and the Technical Standards mentioned above. This said equipment in the configuration described in this report shows the maximum emission levels emanating from equipment and the level of the immunity endurance of the equipment are within the compliance requirements.

The test results of this report relate only to the tested sample identified in this report.

Tested by (+ signature):

chloe

Chloe Cai

Jul. 01-18, 2016

Review by (+ signature):

Henry

Henry Chen



Jul. 19, 2016

Approved by (+ signature):

Jane

Yvette Zhou(Manager)

Jul. 19, 2016

2. GENERAL INFORMATION

2.1 Product Information

Product	TND Tablet
Brand Name	Rand McNally
Model Number	TNDT80B
Series Model Name:	RVT80B, RET80B
Series Model Difference description:	Only different in model name.
Power Supply	DC 5V by USB Port DC 3.7V by Battery
Frequency Range	802.11b/g/n(20MHz): 2412-2462MHz 802.11n(40MHz): 2422-2452MHz
Modulation Type:	IEEE 802.11b mode: DSSS IEEE 802.11g mode: OFDM 802.11n Standard-20 MHz Channel mode: OFDM 802.11n Standard-40 MHz Channel mode: OFDM
Channel Number	802.11b/g/n(20MHz): 11 802.11n(40MHz): 7
Antenna Type	Internal Antenna, 0.5dBi
Temperature Range	-10°C ~ +50°C

NOTE:

- For a more detailed features description about the EUT, please refer to User's Manual.

2.2 Objective

The objective of the report is to perform tests according to FCC Part 15 Subpart C for the EUT FCC ID Certification:

No.	Identity	Document Title
1	47 CFR Part 15	Radio Frequency Devices
2	KDB 558074	Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247

2.3 Test Standards and Results

No.	Section	Test Items	Result	Date of Test
1	FCC 15.203	Antenna Requirement	PASS	2016-07-13
2	FCC15.207 (a)	AC Power Line Conducted Emission	PASS	2016-07-12
3	FCC15.209, 15.247(d)	Radiated Emission	PASS	2016-07-12
4	FCC15.247(b)(3)	Conducted Peak Output Power	PASS	2016-07-11
5	FCC15.247(a)(2)	6dB Emission Bandwidth	PASS	2016-07-11
6	FCC15.247(e)	Power Spectral Density	PASS	2016-07-11
7	FCC15.247(d)	Band Edge and Conducted Spurious Emissions	PASS	2016-07-12
8	FCC15.247(d)	Restricted Frequency Bands	PASS	2016-07-12

Note: 1. The test result judgment is decided by the limit of measurement standard
 2. The information of measurement uncertainty is available upon the customer's request.

2.4 Environmental Conditions

During the measurement the environmental conditions were within the listed ranges:

- Temperature: 15-35°C
- Humidity: 30-60 %
- Atmospheric pressure: 86-106 kPa

3. TEST METHODOLOGY

3. 1 TEST FACILITY

Test Site: Most Technology Service Co., Ltd
Location: No.5, Langshan 2nd Rd., North Hi-Tech Industrial park, Nanshan, Shenzhen, Guangdong, China
Description: There is one 3m semi-anechoic an area test sites and two line conducted labs for final test. The Open Area Test Sites and the Line Conducted labs are constructed and calibrated to meet the FCC requirements in documents ANSI C63.10:2013 and CISPR 16 requirements.
The FCC Registration Number is **490827**. The **IC** Registration Number is **7103A-1**.
Site Filing: The site description is on file with the Federal Communications Commission, 7435 Oakland Mills Road, Columbia, MD 21046.
Instrument All measuring equipment is in accord with ANSI C63.10:2013 and CISPR 16
Tolerance: requirements that meet industry regulatory agency and accreditation agency requirement.
Ground Plane: Two conductive reference ground planes were used during the Line Conducted Emission, one in vertical and the other in horizontal. The dimensions of these ground planes are as below. The vertical ground plane was placed distancing 40 cm to the rear of the wooden test table on where the EUT and the support equipment were placed during test. The horizontal ground plane projected 50 cm beyond the footprint of the EUT system and distanced 80 cm to the wooden test table. For Radiated Emission Test, one horizontal conductive ground plane extended at least 1m beyond the periphery of the EUT and the largest measuring antenna, and covered the entire area between the EUT and the antenna.

3.2 GENERAL TEST PROCEDURES

Radiated Emissions

The EUT is placed on a turn table, which is 1.5 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 6.5 of ANSI C63.10:2013.

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10:2013, Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

4. SETUP OF EQUIPMENT UNDER TEST

4.1 SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

4.2 SUPPORT EQUIPMENT

Device Type	Manufacturer	Model Name	Serial No.	Data Cable	Power Cable
---	---	---	---	---	---

Remark:

All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.3 TEST EQUIPMENT LIST

Instrumentation: The following list contains equipment used at Most for testing. The equipment conforms to the CISPR 16-1 / ANSI C63.2 Specifications for Electromagnetic Interference and Field Strength Instrumentation from 10 kHz to 1.0 GHz or above.

No.	Equipment	Manufacturer	Model No.	S/N	Calibration date	Calibration Interval
1	Test Receiver	Rohde & Schwarz	ESCI	100492	2016/03/10	1 Year
2	Spectrum Analyzer	Agilent	E7405A	US44210471	2016/03/14	1 Year
3	L.I.S.N.	Rohde & Schwarz	ENV216	100093	2016/03/10	1 Year
4	Coaxial Switch	Anritsu Corp	MP59B	6200283933	2016/03/07	1 Year
5	Terminator	Hubersuhner	50Ω	No.1	2016/03/07	1 Year
6	RF Cable	SchwarzBeck	N/A	No.1	2016/03/07	1 Year
7	Test Receiver	Rohde & Schwarz	ESPI	101202	2016/03/10	1 Year
8	Bilog Antenna	Sunol	JB3	A121206	2016/03/14	1 Year
9	Horn Antenna	SCHWARZBECK	BBHA9120D	756	2016/03/14	1 Year
10	Horn Antenna	Penn Engineering	9034	8376	2016/03/14	1 Year
11	Cable	Resenberger	N/A	NO.1	2016/03/07	1 Year
12	Cable	SchwarzBeck	N/A	NO.2	2016/03/07	1 Year
13	Cable	SchwarzBeck	N/A	NO.3	2016/03/07	1 Year
14	Single Phase Power Line Filter	DuoJi	FNF 202B30	N/A	2016/03/07	1 Year
15	Test Receiver	Rohde & Schwarz	ESCI	100492	2016/03/10	1 Year
16	Loop antenna	ARA	PLA-1030/B	1039	2016/03/14	1 Year
17	Power Meter	Anritsu	ML2495A	1204008	2016/03/10	1 Year

NOTE: Equipments listed above have been calibrated and are in the period of validation.

5. 47 CFR Part 15 C Requirements

5.1 RF EXPOSURE

5.1.1 Applicable Standard

According to §15.247(i) and §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB447498 D01 General RF Exposure Guidance v05r02:

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 5 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

$f(\text{GHz})$ is the RF channel transmit frequency in GHz

Power and distance are rounded to the nearest mW and mm before calculation

The result is rounded to one decimal place for comparison

3.0 and 7.5 are referred to as the numeric thresholds in the step 2 below

The test exclusions are applicable only when the minimum test separation distance is ≤ 5 mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is < 5 mm, a distance of 5 mm according to 5) in section 4.1 is applied to determine SAR test exclusion.

5.1.2 Measurement Result

The maximum conducted output power = 9.63dBm (9.18mW) at 2462 MHz $[(\text{max. power of channel, mW}) / (\text{min. test separation distance, mm})] [\sqrt{f(\text{GHz})}]$

$$= 9.18 / 5 * (\sqrt{2.462}) = 2.88 < 3.0$$

So the stand-alone SAR evaluation is not necessary.

5.2 ANTENNA REQUIREMENT

5.2.1 Applicable Standard

According to FCC § 15.203 , An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

5.2.2 Evaluation Criteria

- (a) Antenna must be permanently attached to the unit.
- (b) Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, Installer shall be responsible for verifying that the correct antenna is employed with the unit.

5.2.3 Result: Compliance.

The EUT has one integral antenna arrangement, which was permanently attached and the antenna gain is 0.5 dBi, fulfill the requirement of this section.

5.3 AC Power Line Conducted Emission

5.3.1 Requirement


A radio apparatus that is designed to be connected to the public utility (AC) power line shall ensure that the radio frequency voltage, which is conducted back onto the AC power line on any frequency or frequencies within the range 150 kHz-30 MHz, shall not exceed the limits in the following table:

Frequency	Maximum RF Line Voltage	
	Q.P. (dBuV)	Average (dBuV)
150kHz-500kHz	66-56	56-46
500kHz-5MHz	56	46
5MHz-30MHz	60	50

****Note:** 1. the lower limit shall apply at the band edges.

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz

5.3.2 Block Diagram of Test Setup

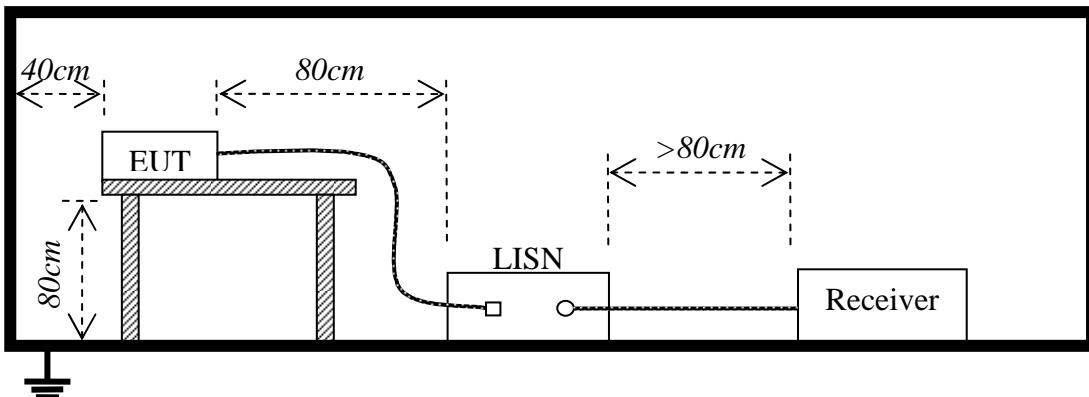

5.3.3 Test procedure

1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment.
2. Exploratory measurements were made to identify the frequency of the emission that has the highest amplitude relative to the limit;
3. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs).
4. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement.
5. The bandwidth of test receiver (ESCI) set at 9 KHz.
6. All data was recorded in the Quasi-peak and average detection mode.


5.3.4 Test Result

Pass

Note: All test modes are performed, only the worst case is recorded in this report.

Please refer the following pages.


EUT:	TND Tablet	M/N:	TNDT80B (Adapter Model:KZ0502000)
Mode:	802.11b mode	Phase:	N
Test by:	John	Power:	DC 5V by USB Port
Temperature: / Humidity	24.4°C / 50.8%	Test date:	2016-07-11

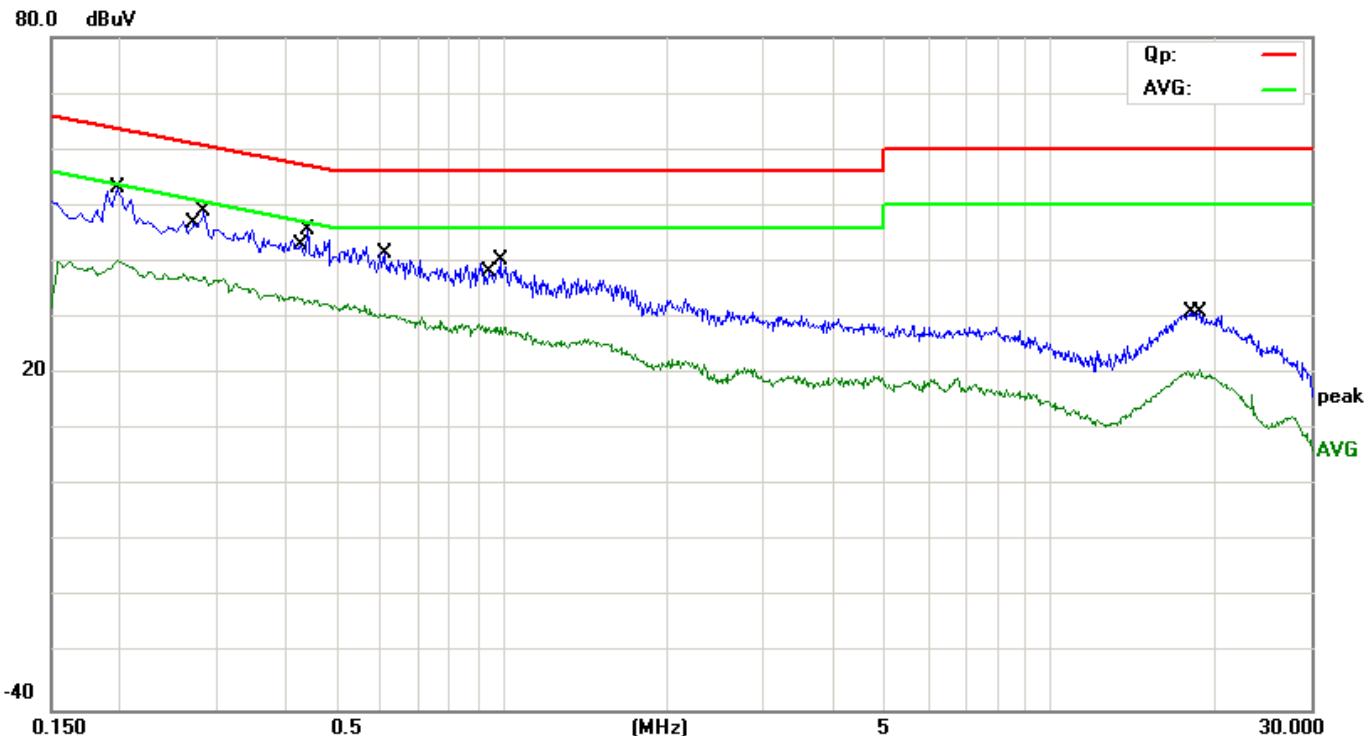

No.	Mk.	Freq. MHz	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level dBuV	Factor dB	ment dBuV				
1	*	0.1980	43.47	9.60	53.07	63.69	-10.62	QP	
2		0.1980	30.77	9.60	40.37	53.69	-13.32	AVG	
3		0.2701	27.70	9.60	37.30	51.11	-13.81	AVG	
4		0.2860	39.35	9.59	48.94	60.64	-11.70	QP	
5		0.4220	24.05	9.59	33.64	47.41	-13.77	AVG	
6		0.4420	36.04	9.59	45.63	57.02	-11.39	QP	
7		0.6100	31.77	9.59	41.36	56.00	-14.64	QP	
8		0.6100	21.02	9.59	30.61	46.00	-15.39	AVG	
9		0.9460	18.74	9.60	28.34	46.00	-17.66	AVG	
10		0.9940	30.62	9.60	40.22	56.00	-15.78	QP	
11		18.0900	21.29	9.72	31.01	60.00	-28.99	QP	
12		18.7460	10.95	9.72	20.67	50.00	-29.33	AVG	

*:Maximum data x:Over limit !:over margin


EUT:	TND Tablet	M/N:	TNDT80B (Adapter Model:KZ0502000)
Mode:	802.11b mode	Phase:	L1
Test by:	John	Power:	DC 5V by USB Port r
Temperature: / Humidity	24.4°C / 50.8%	Test date:	2016-07-11

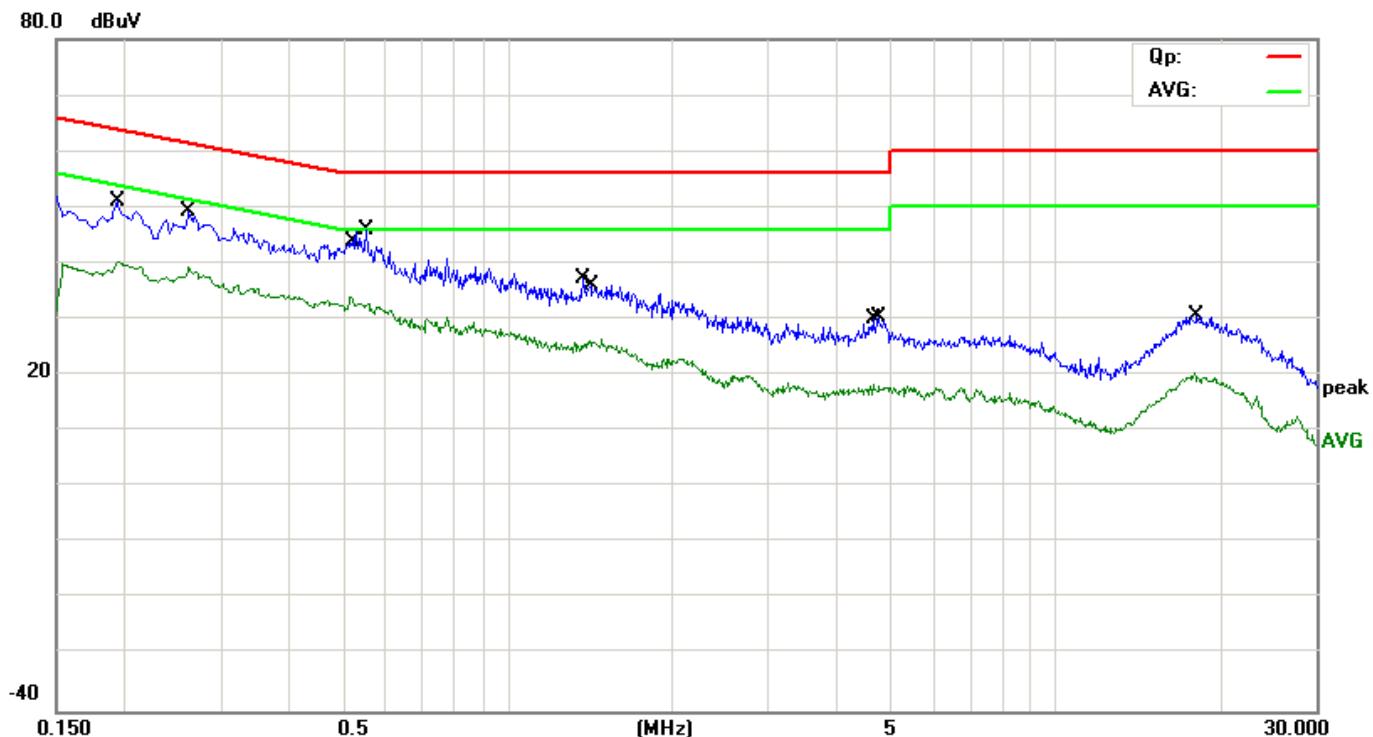

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dB	Over Detector	Comment
1	0.1940	41.55	9.60	51.15	63.86	-12.71	QP	
2	0.1940	30.68	9.60	40.28	53.86	-13.58	AVG	
3	0.2620	39.74	9.60	49.34	61.37	-12.03	QP	
4	0.2620	29.62	9.60	39.22	51.37	-12.15	AVG	
5	0.5180	24.24	9.59	33.83	46.00	-12.17	AVG	
6	*	0.5540	36.23	9.59	45.82	56.00	-10.18	QP
7	1.3740	27.74	9.60	37.34	56.00	-18.66	QP	
8	1.4180	16.53	9.60	26.13	46.00	-19.87	AVG	
9	4.6660	8.79	9.63	18.42	46.00	-27.58	AVG	
10	4.7500	20.87	9.63	30.50	56.00	-25.50	QP	
11	17.9540	10.64	9.72	20.36	50.00	-29.64	AVG	
12	18.1780	20.81	9.72	30.53	60.00	-29.47	QP	

*:Maximum data x:Over limit !:over margin


EUT:	TND Tablet	M/N:	TNDT80B
Mode:	802.11b mode	Phase:	N
Test by:	John	Power:	DC 5V by USB Port
Temperature: / Humidity	24.4°C / 50.8%	Test date:	2016-07-14

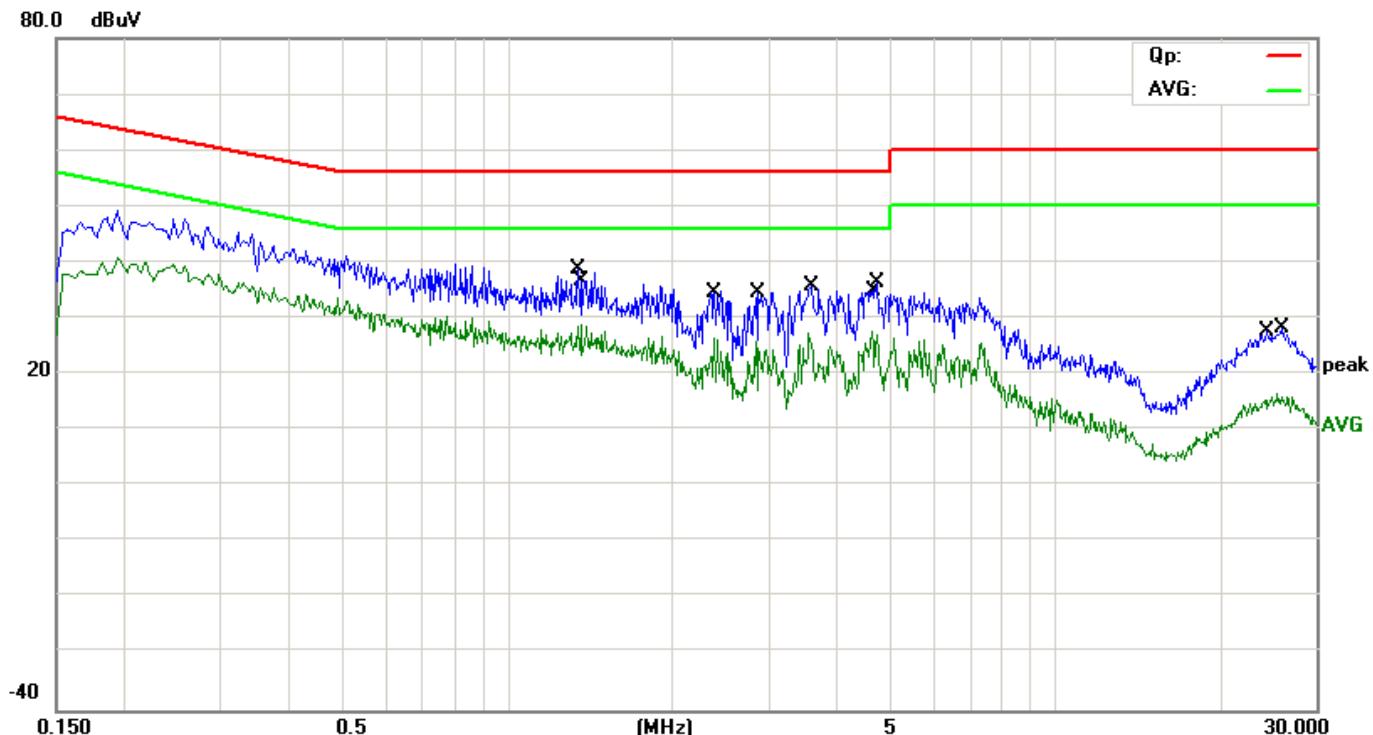

No.	Mk.	Freq. MHz	Reading Level	Correct Factor	Measure- ment	Limit	Over	Detector	Comment
			dBuV	dB	dBuV	dB	Detector		
1	*	1.3660	19.14	9.63	28.77	46.00	-17.23	AVG	
2		1.3460	28.95	9.65	38.60	56.00	-17.40	QP	
3		2.3900	25.27	9.39	34.66	56.00	-21.34	QP	
4		2.3900	17.12	9.39	26.51	46.00	-19.49	AVG	
5		2.8540	16.00	9.85	25.85	46.00	-20.15	AVG	
6		2.8740	24.75	9.87	34.62	56.00	-21.38	QP	
7		3.5900	25.28	10.59	35.87	56.00	-20.13	QP	
8		3.5500	16.69	10.55	27.24	46.00	-18.76	AVG	
9		4.6300	16.01	11.63	27.64	46.00	-18.36	AVG	
10		4.7460	24.48	11.75	36.23	56.00	-19.77	QP	
11		24.4860	18.54	9.00	27.54	60.00	-32.46	QP	
12		25.4860	7.43	9.00	16.43	50.00	-33.57	AVG	

*:Maximum data x:Over limit !:over margin

EUT:	TND Tablet	M/N:	TNDT80B
Mode:	802.11b mode	Phase:	L1
Test by:	John	Power:	DC 5V by USB Port
Temperature: / Humidity	24.4°C / 50.8%	Test date:	2016-07-14

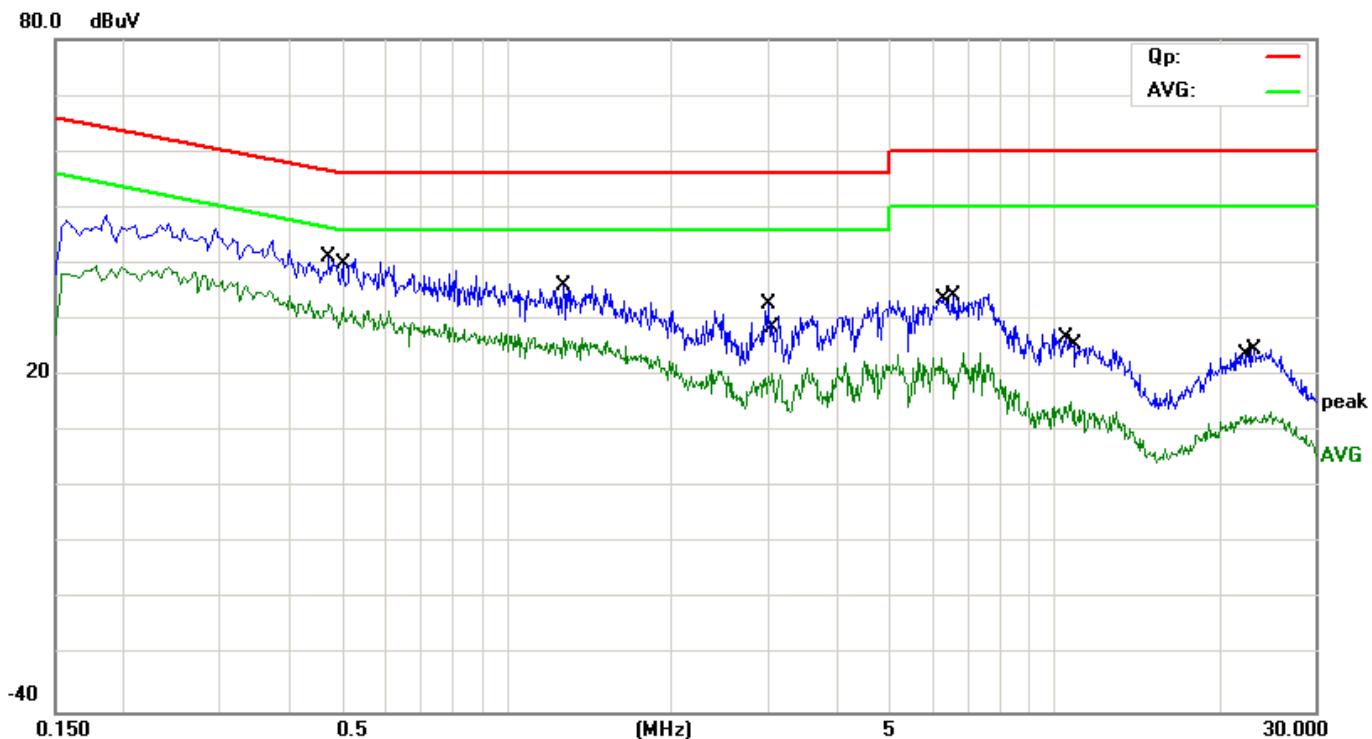

No.	Mk.	Freq. MHz	Reading Level	Correct Factor	Measure- ment	Limit	Over	Comment
			dBuV	dB	dBuV	dBuV	dB	
1		6.2420	11.81	11.25	23.06	50.00	-26.94	AVG
2		6.5340	23.28	11.08	34.36	60.00	-25.64	QP
3		23.1660	15.70	9.00	24.70	60.00	-35.30	QP
4		22.5220	3.87	9.00	12.87	50.00	-37.13	AVG
5		10.7660	6.41	9.00	15.41	50.00	-34.59	AVG
6		10.5580	17.83	9.00	26.83	60.00	-33.17	QP
7		3.0660	10.25	10.07	20.32	46.00	-25.68	AVG
8		3.0180	22.71	10.02	32.73	56.00	-23.27	QP
9		0.5020	30.06	10.00	40.06	56.00	-15.94	QP
10	*	0.4780	22.41	10.15	32.56	46.37	-13.81	AVG
11		1.2700	16.87	9.73	26.60	46.00	-19.40	AVG
12		1.2700	26.37	9.73	36.10	56.00	-19.90	QP

*:Maximum data x:Over limit !:over margin

5.4 Radiated Emission

5.4.1 Requirement

According to FCC section 15.247(d), In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

According to FCC section 15.209(a), Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V/m}$ at 3-meter)	Test Distance (m)	Field Strength ($\text{dB}\mu\text{V/m}$ at 3-meter)
0.009 - 0.490	2400/F(kHz)	300	
0.490 - 1.705	24000/F(kHz)	30	
1.705-30	30	30	
30-88	100	3	40
88-216	150	3	43.5
216-960	200	3	46
Above 960	500	3	54

Note:


- For Above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
- For above 1000MHz, limit field strength of harmonics: 54dB μ V/m@3m (AV) and 74dB μ V/m@3m (PK)

In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).


5.4.2 Test Configuration

Test Setup:


- For radiated emissions from 9kHz to 30MHz

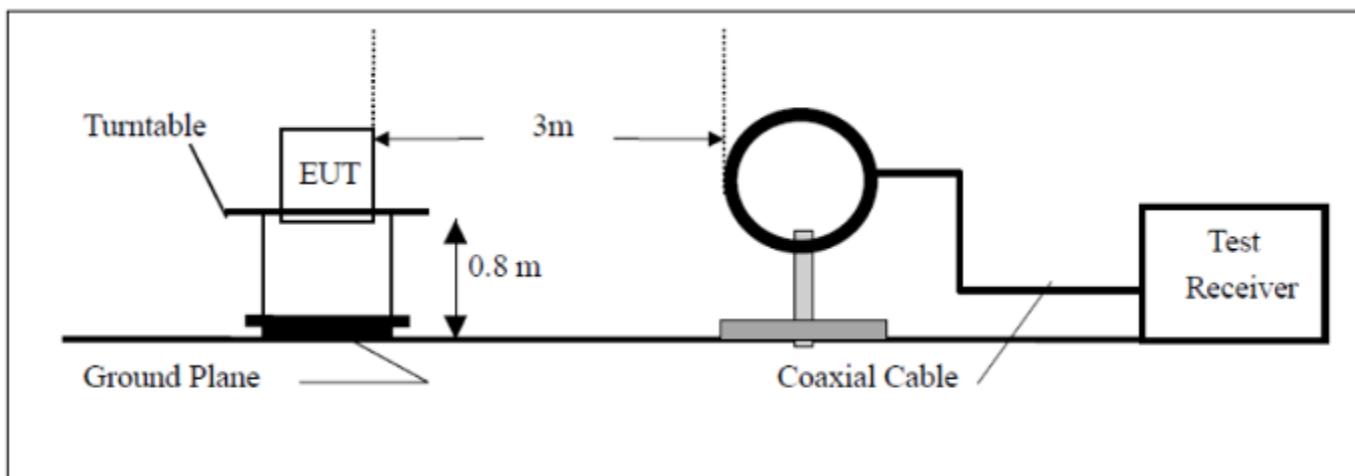

2) For radiated emissions from 30MHz to 1GHz

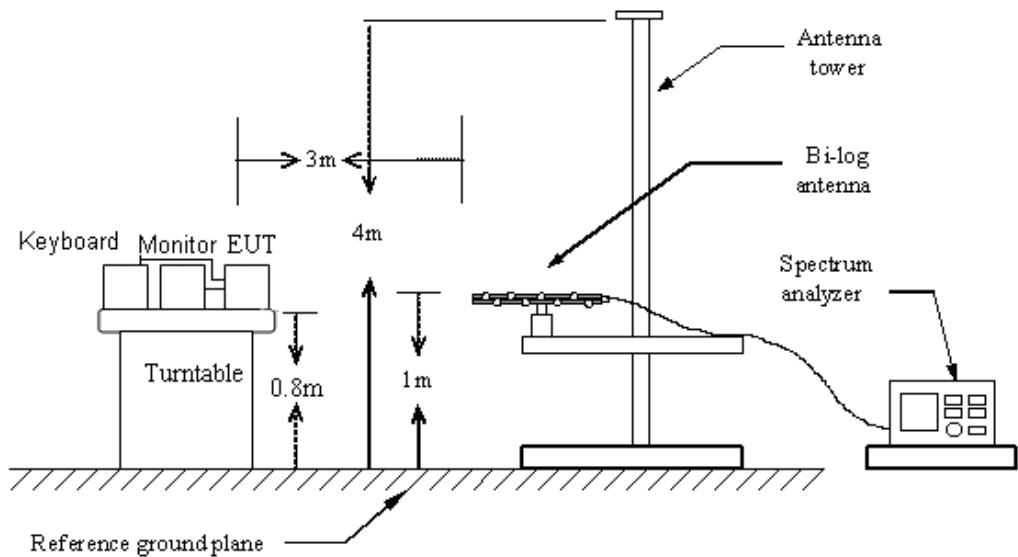

3) For radiated emissions above 1GHz

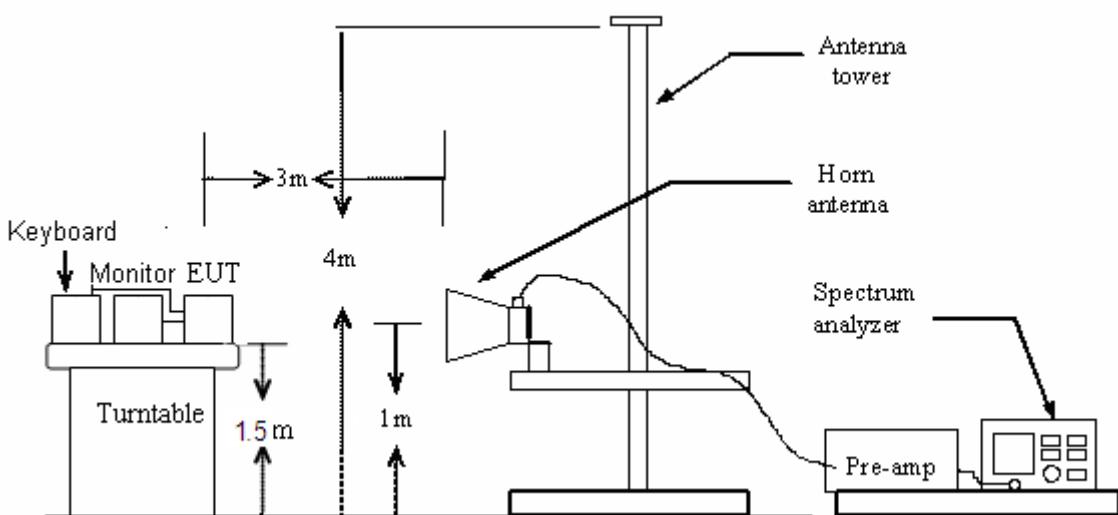**5.4.3 Test Procedure:**

1. For frequencies above 1GHz, the frequencies of maximum emission was recorded by manually positioning the antenna close to the EUT and by moving the antenna over all sides of the EUT while observing a spectral display.
2. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
3. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
4. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
5. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rote table was turned from 0 degrees to 360 degrees to find the maximum reading.

6. For frequencies above 1GHz, horn antenna mouth should face to the EUT all the time when rise or fall.
7. Set the spectrum analyzer in the following setting as:

Below 1GHz: PEAK: RBW=100 kHz / VBW=300 kHz / Sweep=AUTO QP: RBW=120 kHz / Sweep=AUTO
Above 1GHz: (a)PEAK: RBW=VBW=1MHz / Sweep=AUTO
(b)AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO

The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

8. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

5.4.4 Test Result

Pass


Remark:

1. During the test, pre-scan the 802.11b, 802.11g, 802.11n(20M), 802.11n(40M) modulation, and found the 802.11b modulation which it is worse case in above 1GHz and the 802.11b Low channel modulation which it is worse case in below 1GHz.
2. Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis which it is worse case.

Please refer the following pages.

Below 1GHz:


EUT:	TND Tablet	M/N:	TNDT80B
Mode:	802.11b Mode	Polarization:	Vertical
Test by:	John	Power:	DC 3.7V by Battery
Temperature: / Humidity	23.9°C / 51.1%	Test date:	2016-07-12

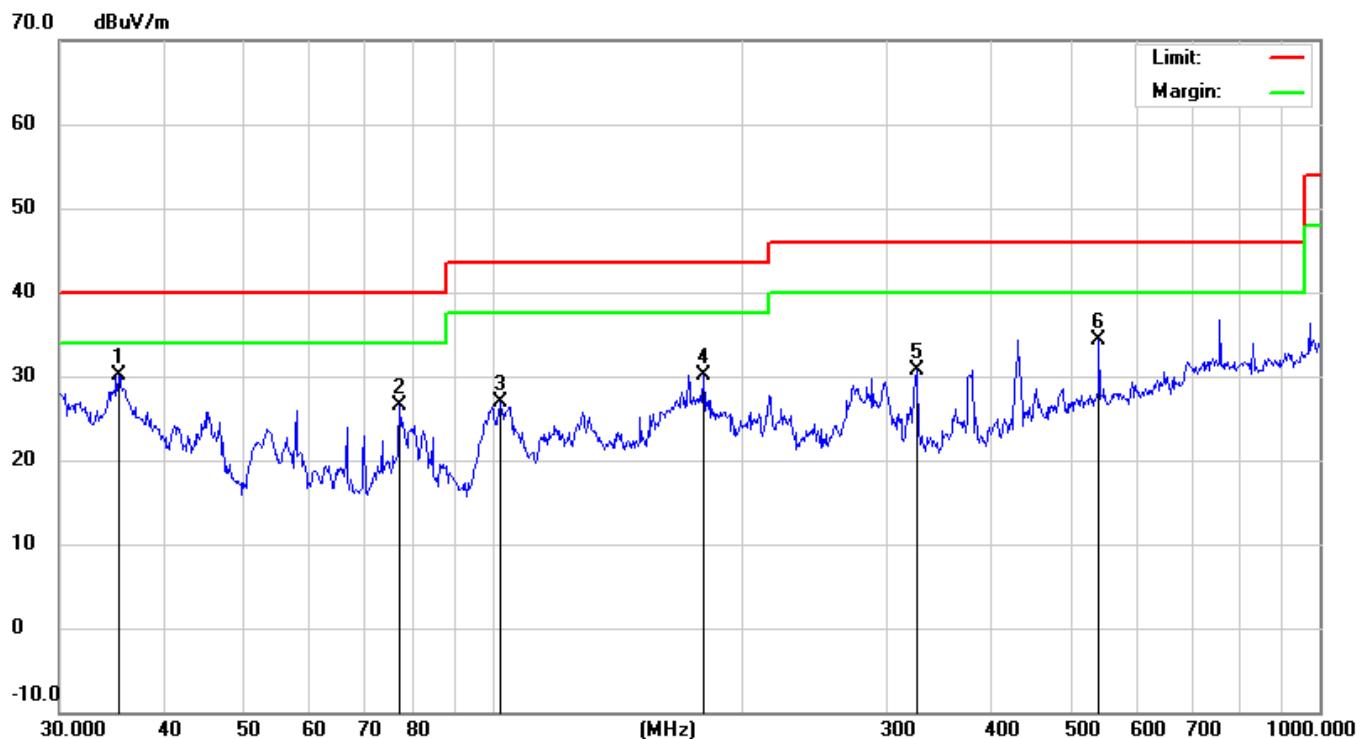

No.	Mk.	Freq. MHz	Reading Level dB _{UV}	Correct Factor dB	Measure- ment dB _{UV} /m	Limit dB _{UV} /m	Over dB	Antenna Height cm	Table Degree	Comment
1	*	35.3750	10.71	19.33	30.04	40.00	-9.96	QP		
2		77.3210	15.04	11.48	26.52	40.00	-13.48	QP		
3		102.3596	13.03	13.88	26.91	43.50	-16.59	QP		
4		180.0164	13.39	16.70	30.09	43.50	-13.41	QP		
5		325.5957	13.74	17.00	30.74	46.00	-15.26	QP		
6		541.3725	12.07	22.24	34.31	46.00	-11.69	QP		

*:Maximum data x:Over limit !:over margin

EUT:	TND Tablet	M/N:	TNDT80B
Mode:	802.11b Mode	Polarization:	Horizontal
Test by:	John	Power:	DC 3.7V by Battery
Temperature: / Humidity	23.9°C / 51.1%	Test date:	2016-07-12

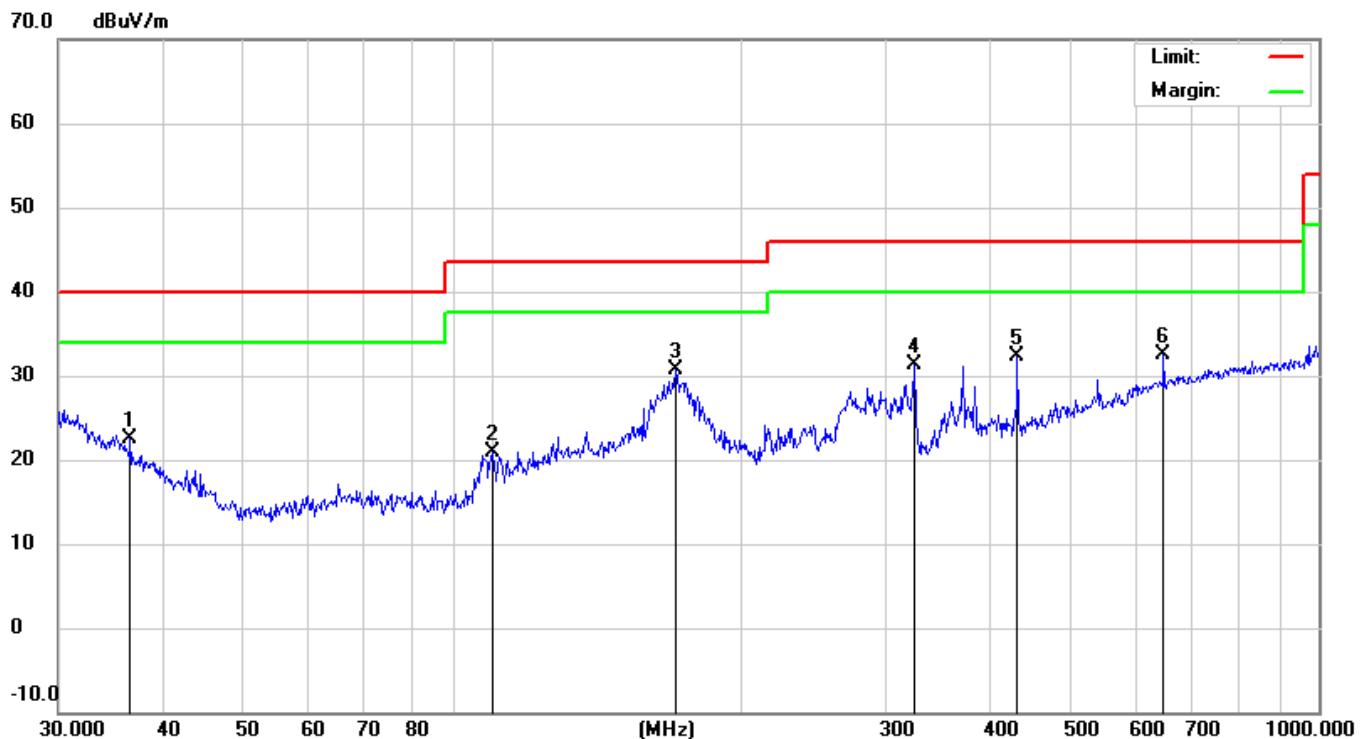


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table		
			Level	Factor	ment					Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		36.6372	4.89	17.59	22.48	40.00	-17.52	QP			
2		100.2285	7.62	13.26	20.88	43.50	-22.62	QP			
3	*	167.2366	13.44	17.22	30.66	43.50	-12.84	QP			
4		324.4560	14.34	17.00	31.34	46.00	-14.66	QP			
5		432.5456	11.95	20.30	32.25	46.00	-13.75	QP			
6		649.6596	8.44	24.10	32.54	46.00	-13.46	QP			

*:Maximum data x:Over limit !:over margin

Above 1GHz


EUT:	TND Tablet	M/N:	TNDT80B
Mode:	802.11b-CH1	Polarization:	Vertical
Test by:	John	Power:	DC 3.7V by Battery
Temperature: / Humidity	23.7°C / 51.6%	Test date:	2016-07-13

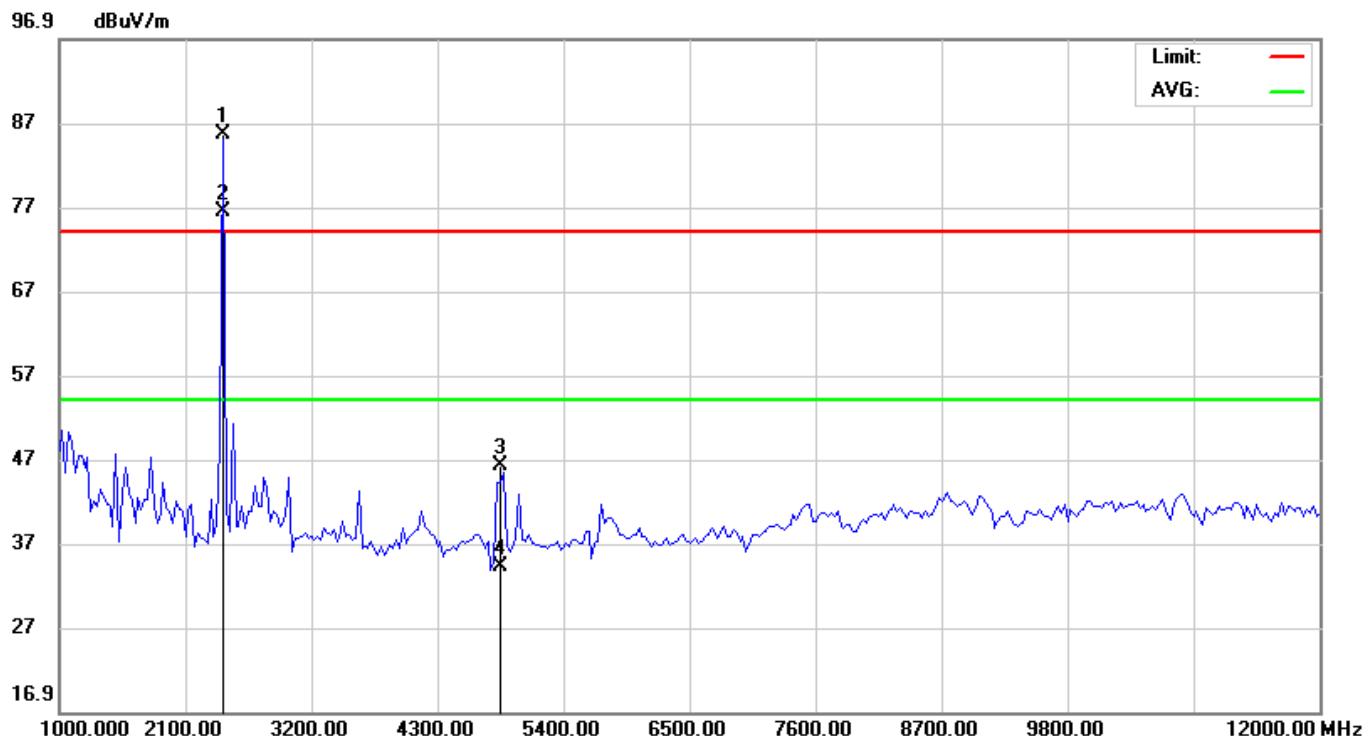

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
			Level	Factor	ment					
		MHz	dBuV	dB	dBuV/m	dB	Detector	cm	degree	Comment
1	X	2412.100	94.01	-8.41	85.60	74.00	11.60	peak		
2	*	2412.100	84.86	-8.41	76.45	54.00	22.45	AVG		
3		4824.000	52.06	-5.91	46.15	74.00	-27.85	peak		
4		4824.000	40.05	-5.91	34.14	54.00	-19.86	AVG		

*:Maximum data x:Over limit !:over margin


EUT:	TND Tablet	M/N:	TNDT80B
Mode:	802.11b-CH1	Polarization:	Vertical
Test by:	John	Power:	DC 3.7V by Battery
Temperature: / Humidity	23.7°C / 51.6%	Test date:	2016-07-13

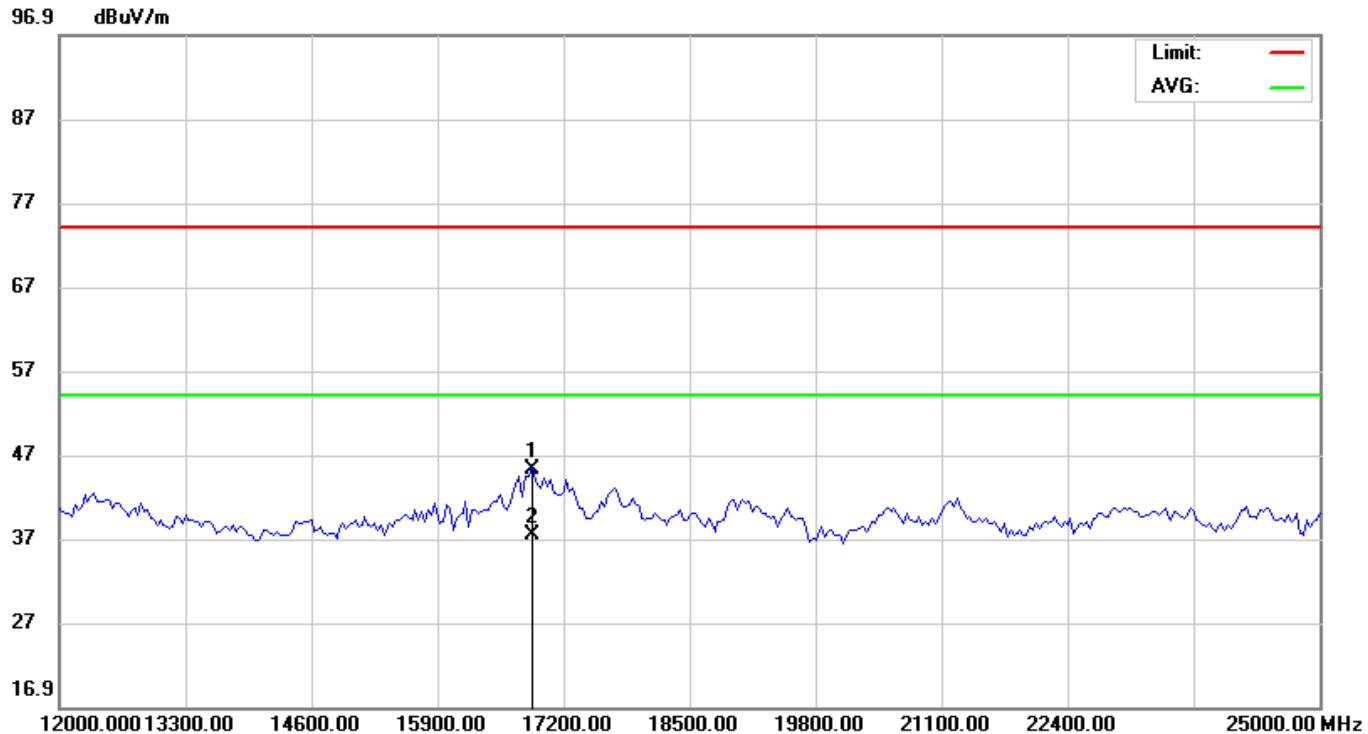

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Table Degree Comment
1		16875.00	38.76	6.51	45.27	74.00	-28.73	peak		
2	*	16875.00	30.86	6.51	37.37	54.00	-16.63	Avg		

*:Maximum data x:Over limit !:over margin

EUT:	TND Tablet	M/N:	TNDT80B
Mode:	802.11b-CH1	Polarization:	Horizontal
Test by:	John	Power:	DC 3.7V by Battery
Temperature: / Humidity	23.7°C/ 51.6%	Test date:	2016-07-13

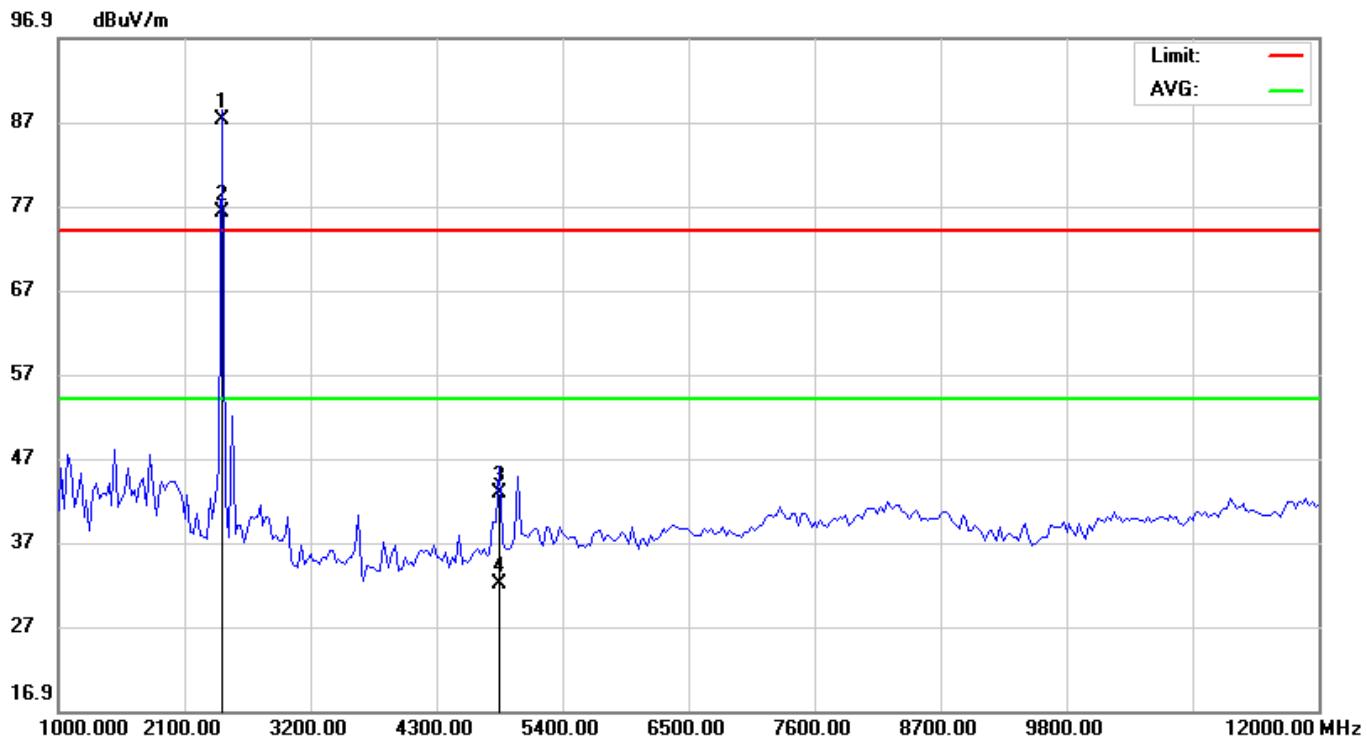

*:Maximum data x:Over limit !:over margin


EUT:	TND Tablet	M/N:	TNDT80B
Mode:	802.11b-CH1	Polarization:	Horizontal
Test by:	John	Power:	DC 12V by Adapter
Temperature: / Humidity	23.7°C/ 51.6%	Test date:	2016-07-12



No.	Mk.	Freq. MHz	Reading Level	Correct Factor	Measure- ment	Limit	Over	Antenna Height cm	Table Degree	Table Degree
			dB _{UV}	dB	dB _{UV} /m	dB _{UV} /m	dB	Detector	cm	degree
1	1	17005.00	39.42	6.90	46.32	74.00	-27.68	peak		
2	*	17005.00	30.06	6.90	36.96	54.00	-17.04	AVG		

*:Maximum data x:Over limit !:over margin


EUT:	TND Tablet	M/N:	TNDT80B
Mode:	802.11g-CH1	Polarization:	Vertical
Test by:	John	Power:	DC 3.7V by Battery
Temperature: / Humidity	23.7°C/ 51.6%	Test date:	2016-07-13

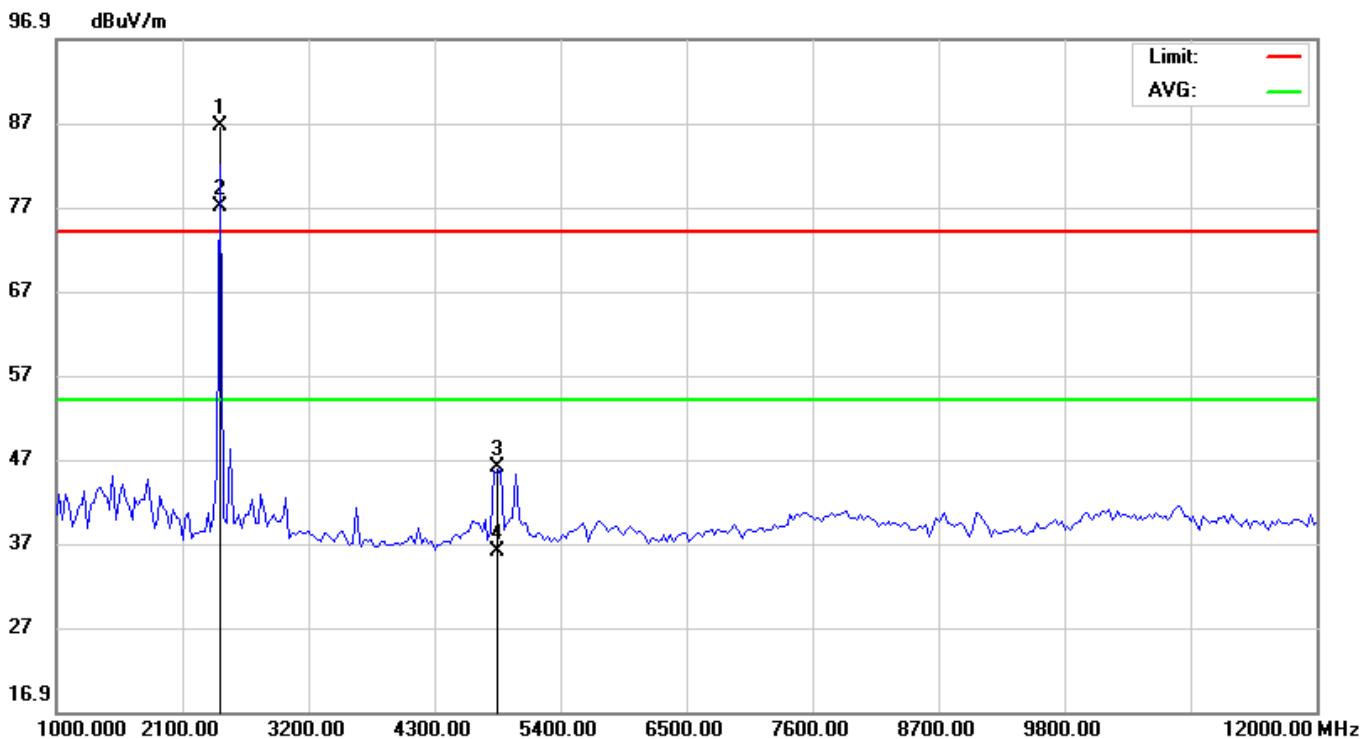

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	X	2412.100	95.01	-8.41	86.60	74.00	12.60	peak		
2	*	2412.100	85.43	-8.41	77.02	54.00	23.02	AVG		
3		4824.000	51.86	-5.91	45.95	74.00	-28.05	peak		
4		4824.000	41.96	-5.91	36.05	54.00	-17.95	AVG		


*:Maximum data x:Over limit !:over margin

EUT:	TND Tablet	M/N:	TNDT80B
Mode:	802.11g-CH1	Polarization:	Vertical
Test by:	John	Power:	DC 3.7V by Battery
Temperature: / Humidity	23.7°C/ 51.6%	Test date:	2016-07-13

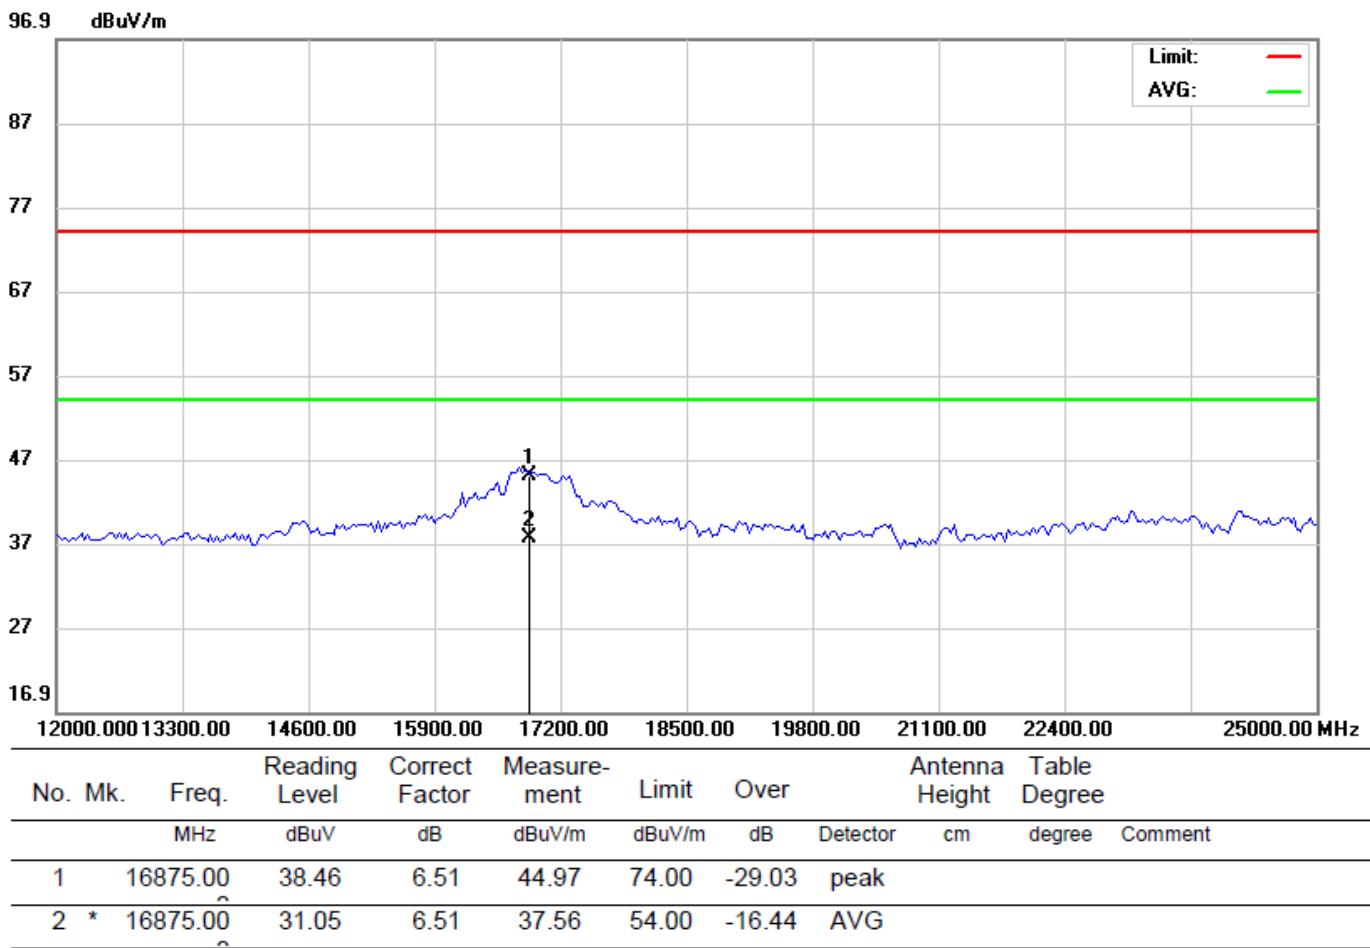

*:Maximum data x:Over limit !:over margin


EUT:	TND Tablet	M/N:	TNDT80B
Mode:	802.11g-CH1	Polarization:	Horizontal
Test by:	John	Power:	DC 3.7V by Battery
Temperature: / Humidity	23.7°C / 51.6%	Test date:	2016-07-13

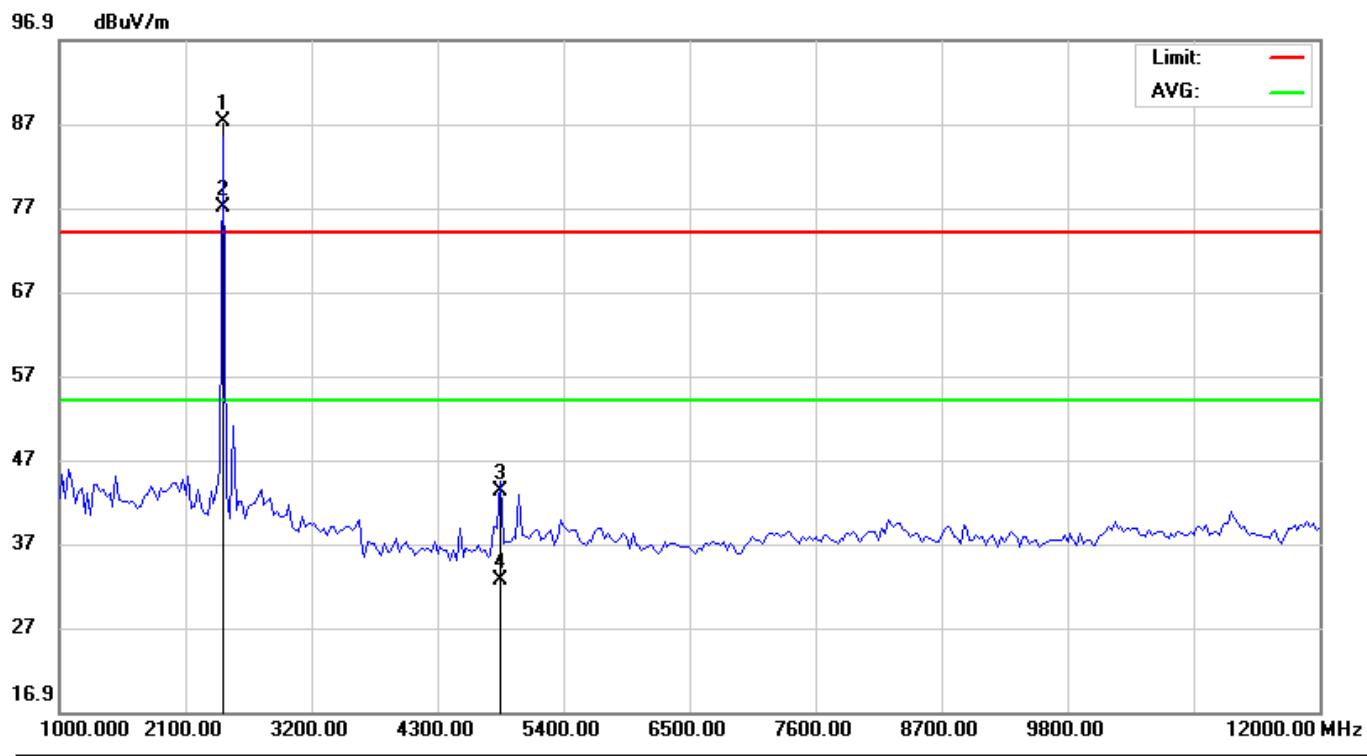

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	X	2412.000	95.52	-8.41	87.11	74.00	13.11	peak		
2	*	2412.000	85.43	-8.41	77.02	54.00	23.02	AVG		
3		4824.000	49.06	-5.91	43.15	74.00	-30.85	peak		
4		4824.000	38.42	-5.91	32.51	54.00	-21.49	AVG		


*:Maximum data x:Over limit !:over margin

EUT:	TND Tablet	M/N:	TNDT80B
Mode:	802.11g-CH1	Polarization:	Horizontal
Test by:	John	Power:	DC 12V by Adapter
Temperature: / Humidity	23.7°C / 51.6%	Test date:	2016-07-12

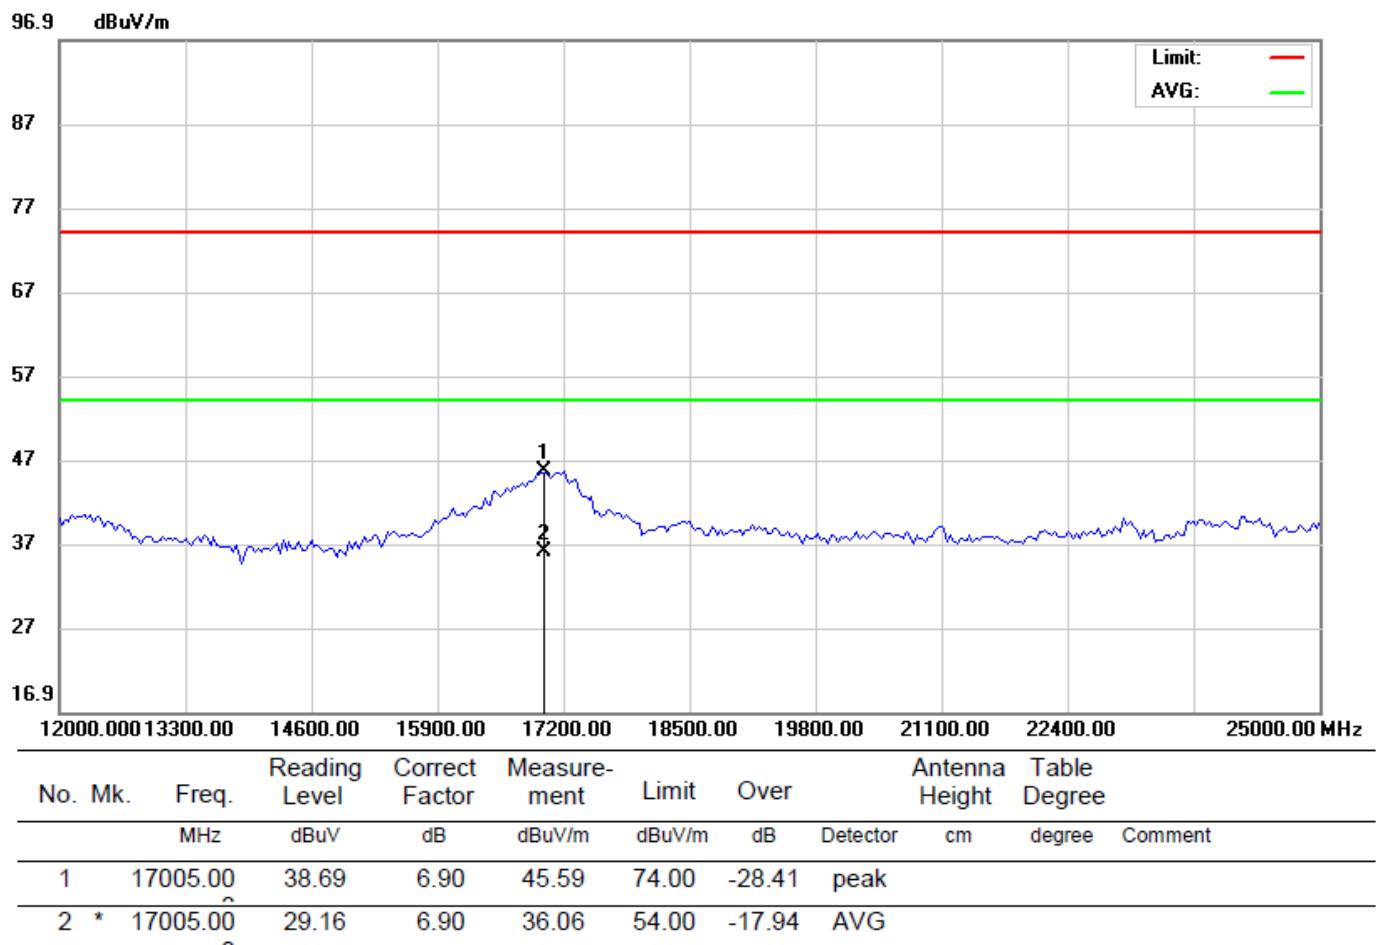

*:Maximum data x:Over limit !:over margin


EUT:	TND Tablet	M/N:	TNDT80B
Mode:	802.11n(20M)-CH1	Polarization:	Vertical
Test by:	John	Power:	DC 3.7V by Battery
Temperature: / Humidity	23.7°C/ 51.6%	Test date:	2016-07-13

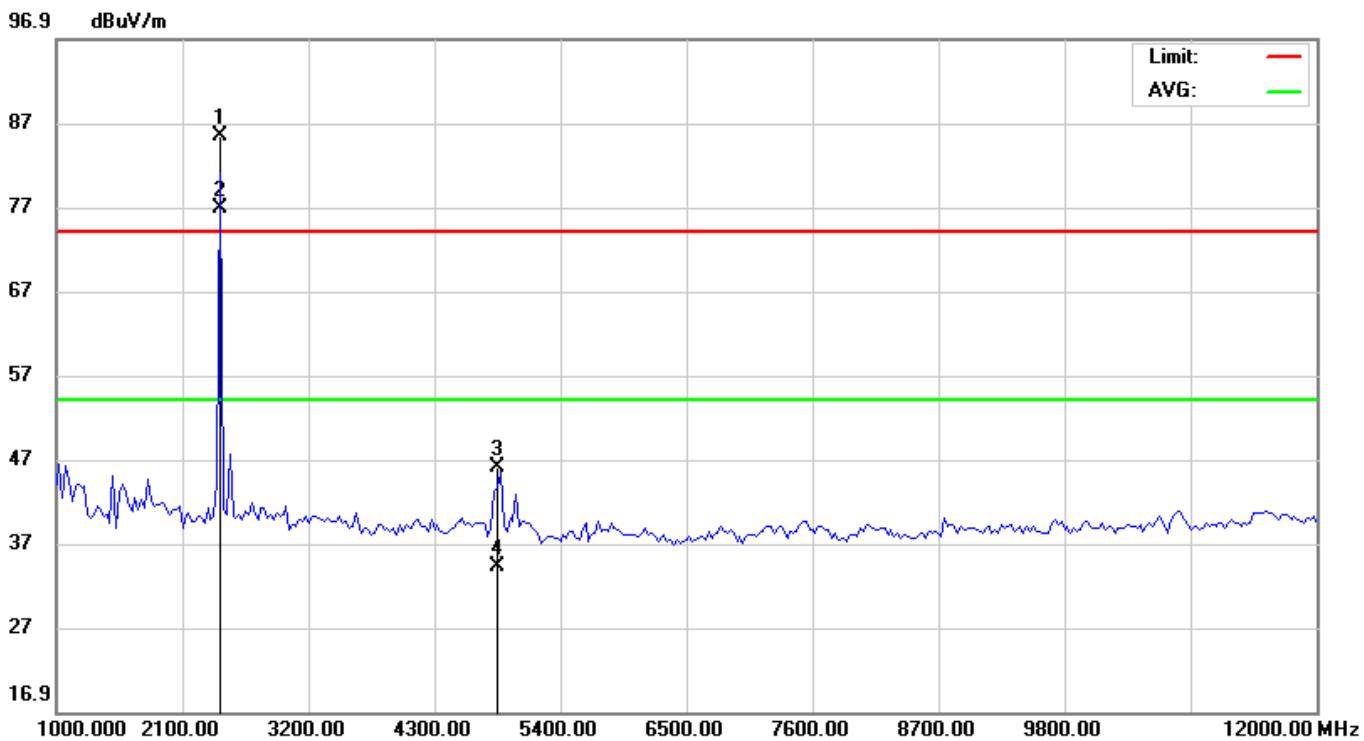

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	X	2412.100	93.86	-8.41	85.45	74.00	11.45	peak		
2	*	2412.100	85.13	-8.41	76.72	54.00	22.72	AVG		
3		4824.000	51.84	-5.91	45.93	74.00	-28.07	peak		
4		4824.000	40.03	-5.91	34.12	54.00	-19.88	AVG		


*:Maximum data x:Over limit !:over margin

EUT:	TND Tablet	M/N:	TNDT80B
Mode:	802.11n(20M)-CH1	Polarization:	Vertical
Test by:	John	Power:	DC 3.7V by Battery
Temperature: / Humidity	23.7°C/ 51.6%	Test date:	2016-07-13

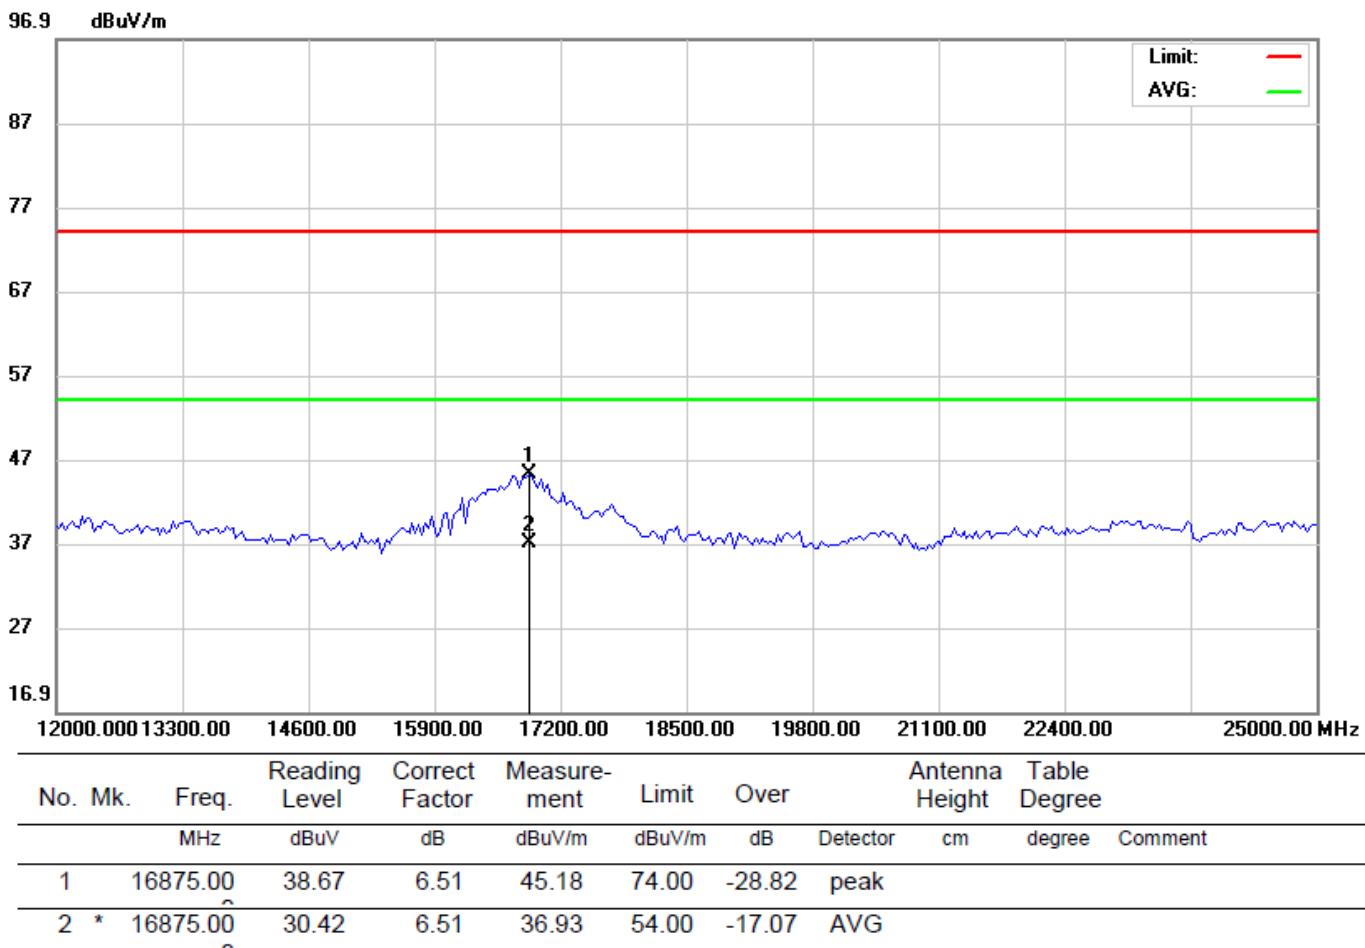


*:Maximum data x:Over limit !:over margin

EUT:	TND Tablet	M/N:	TNDT80B
Mode:	802.11n(20M)-CH1	Polarization:	Horizontal
Test by:	John	Power:	DC 3.7V by Battery
Temperature: / Humidity	23.7°C / 51.6%	Test date:	2016-07-13

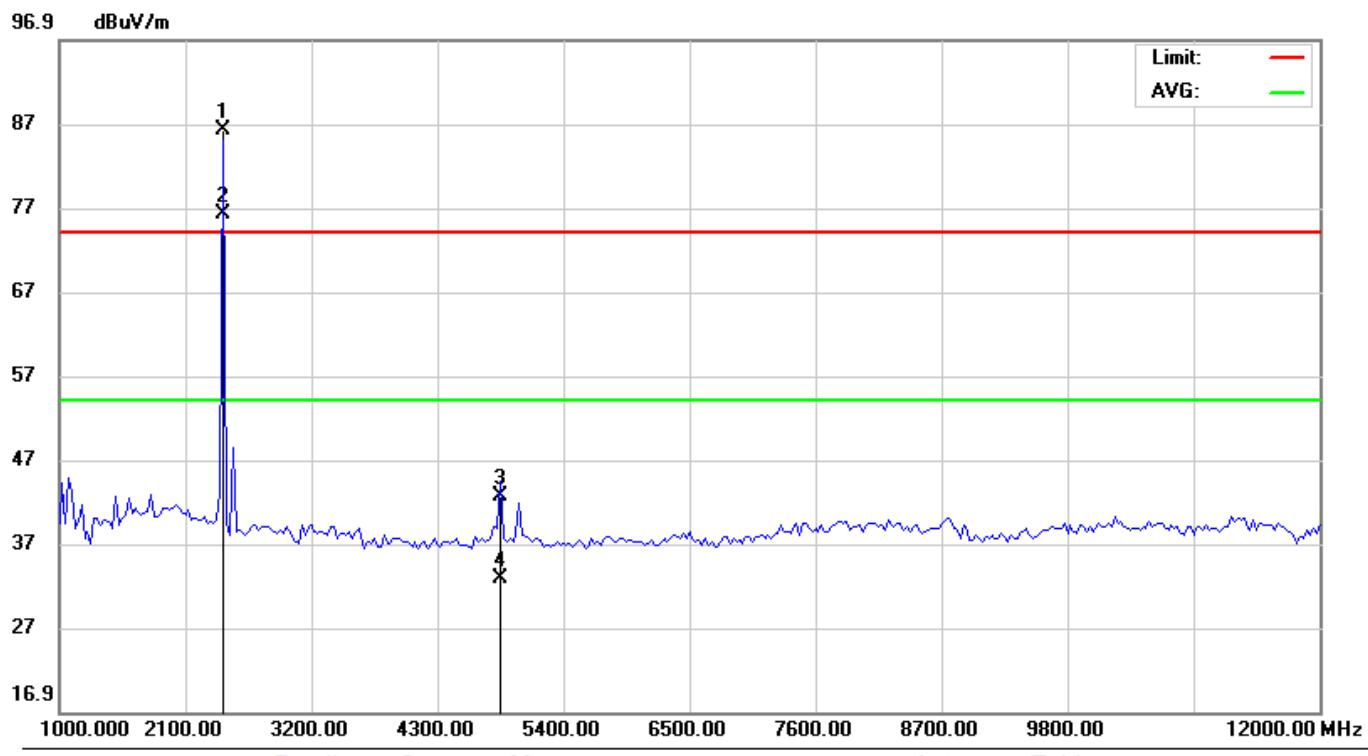


*:Maximum data x:Over limit !:over margin

EUT:	TND Tablet	M/N:	TNDT80B
Mode:	802.11n(20M)-CH1	Polarization:	Horizontal
Test by:	John	Power:	DC 12V by Adapter
Temperature: / Humidity	23.7°C / 51.6%	Test date:	2016-07-12

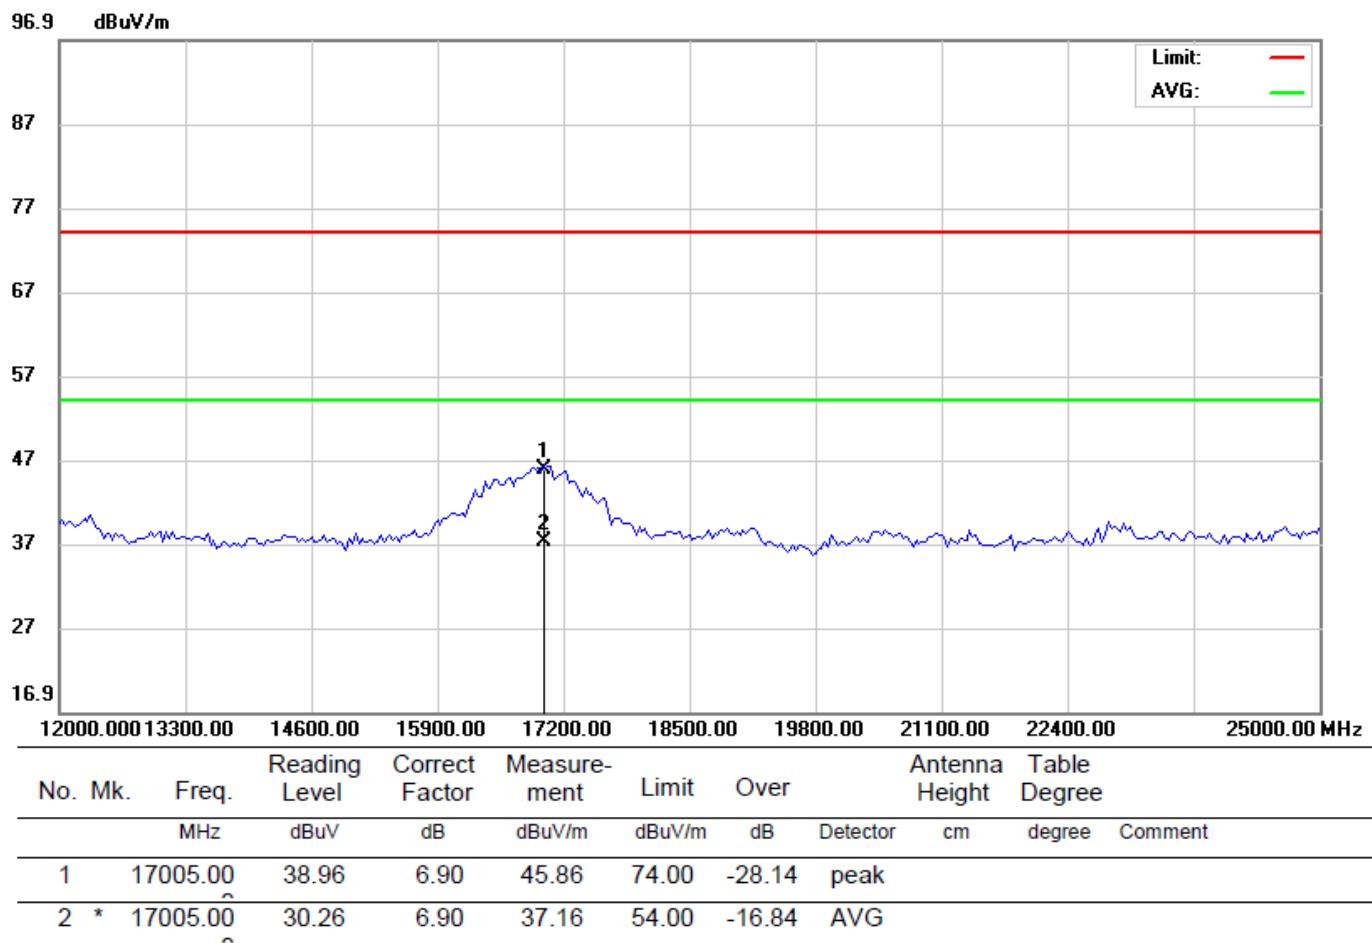

*:Maximum data x:Over limit !:over margin


EUT:	TND Tablet	M/N:	TNDT80B
Mode:	802.11n(40M)-CH3	Polarization:	Vertical
Test by:	John	Power:	DC 3.7V by Battery
Temperature: / Humidity	23.7°C/ 51.6%	Test date:	2016-07-13

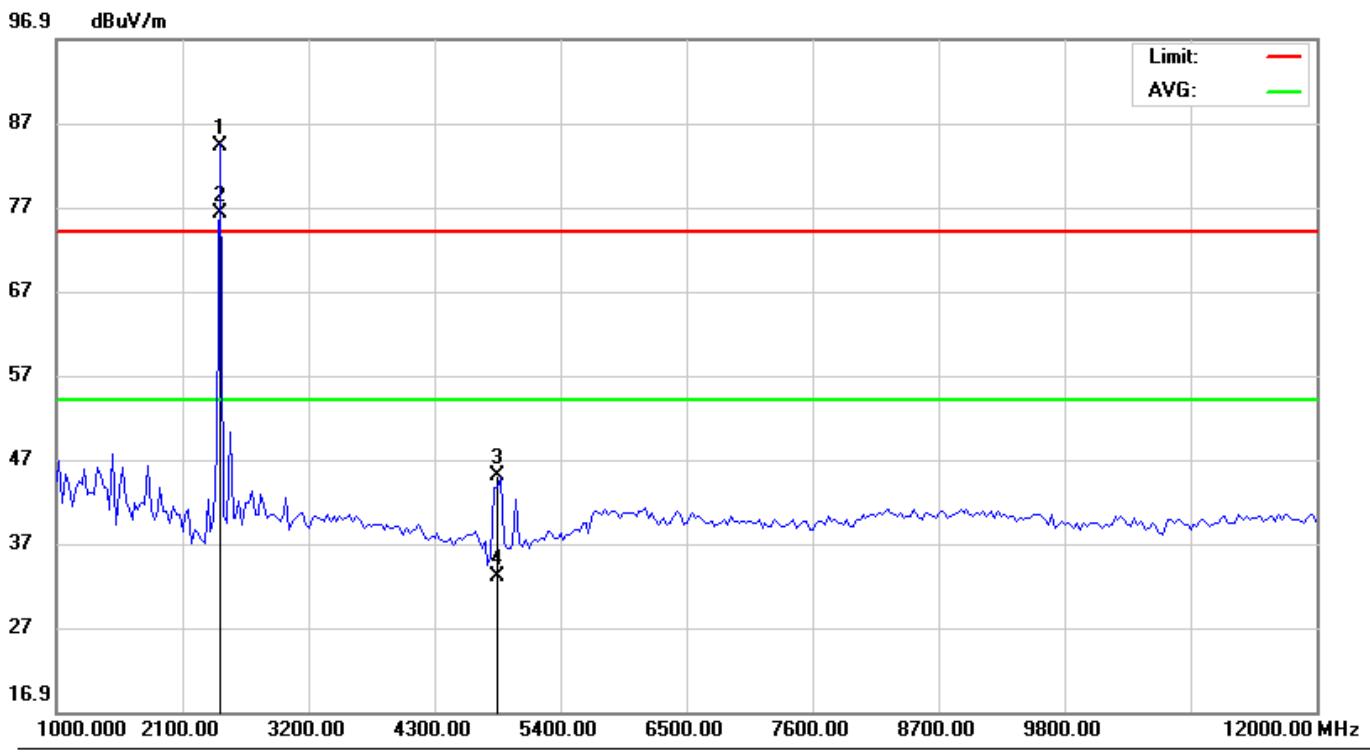

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	X	2422.000	92.68	-8.39	84.29	74.00	10.29	peak		
2	*	2422.000	84.53	-8.39	76.14	54.00	22.14	AVG		
3		4844.000	50.65	-5.67	44.98	74.00	-29.02	peak		
4		4844.000	38.65	-5.67	32.98	54.00	-21.02	AVG		

*:Maximum data x:Over limit !:over margin


EUT:	TND Tablet	M/N:	TNDT80B
Mode:	802.11n(40M)-CH3	Polarization:	Vertical
Test by:	John	Power:	DC 3.7V by Battery
Temperature: / Humidity	23.7°C/ 51.6%	Test date:	2016-07-13

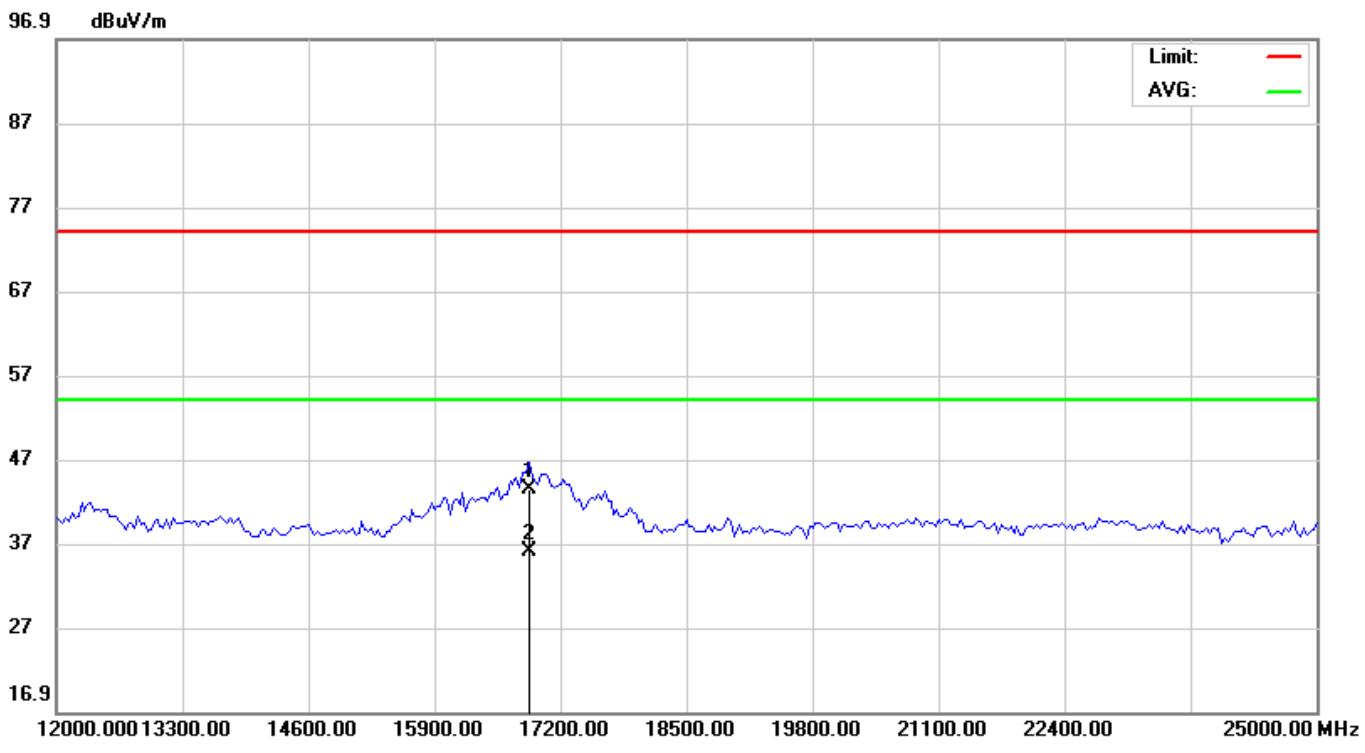

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table			
			Level	Factor	ment					Height	Degree	
			MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		16875.00	36.88	6.51	43.39	74.00	-30.61	peak				
2	*	16875.00	29.43	6.51	35.94	54.00	-18.06	AVG				


*:Maximum data x:Over limit !:over margin

EUT:	TND Tablet	M/N:	TNDT80B
Mode:	802.11n(40M)-CH3	Polarization:	Horizontal
Test by:	John	Power:	DC 3.7V by Battery
Temperature: / Humidity	23.7°C / 51.6%	Test date:	2016-07-13

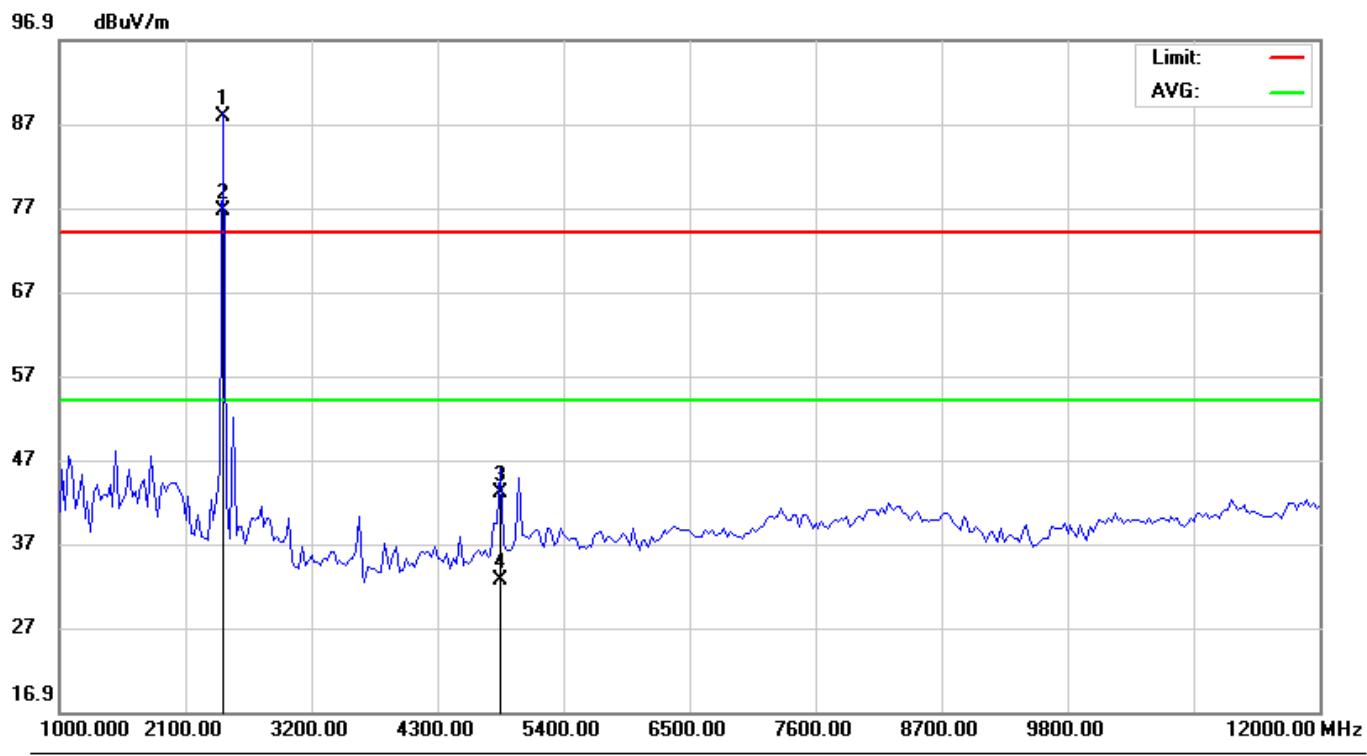

*:Maximum data x:Over limit !:over margin

EUT:	TND Tablet	M/N:	TNDT80B
Mode:	802.11n(40M)-CH3	Polarization:	Horizontal
Test by:	John	Power:	DC 12V by Adapter
Temperature: / Humidity	23.7°C / 51.6%	Test date:	2016-07-12

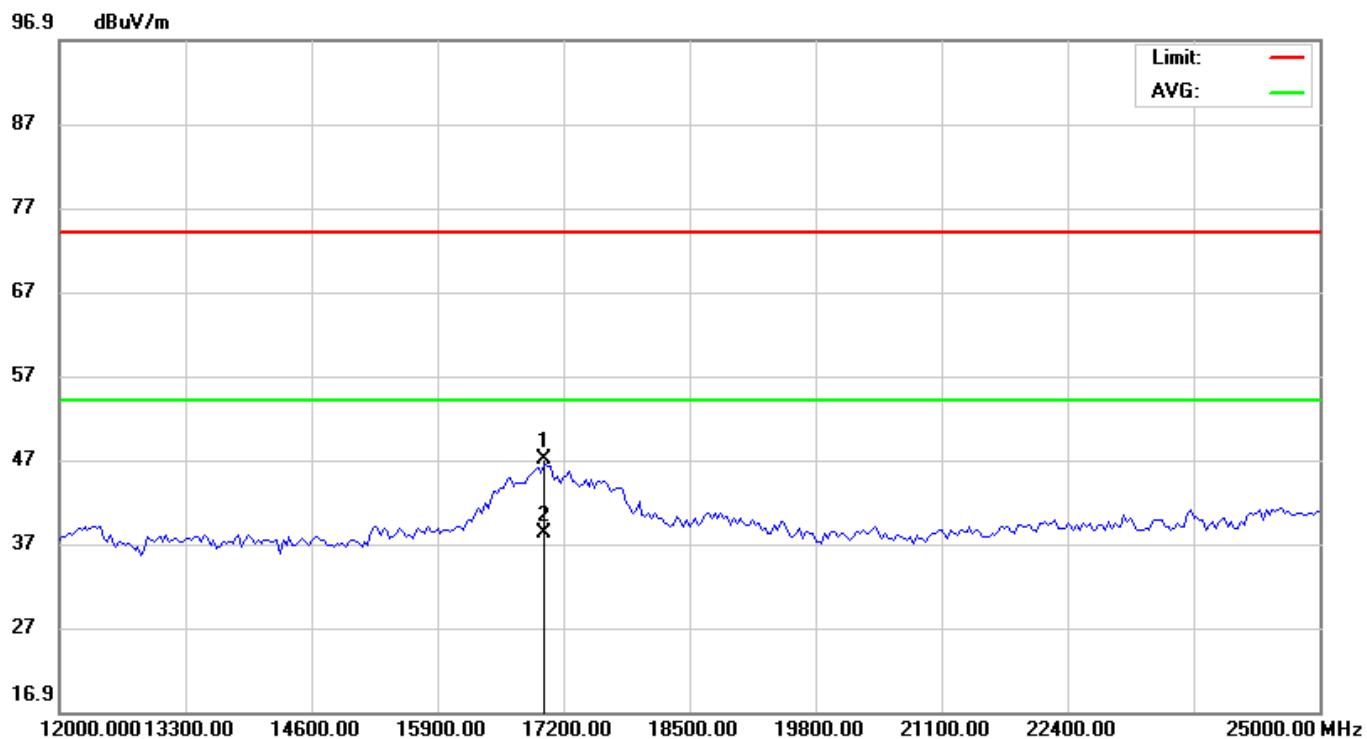

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		17005.00	40.03	6.90	46.93	74.00	-27.07	peak			
2	*	17005.00	31.23	6.90	38.13	54.00	-15.87	AVG			


*:Maximum data x:Over limit !:over margin

5.5 Conducted Peak Output Power

5.5.1 Requirement

According to FCC section 15.247(b)(3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

5.5.2 Block Diagram of Test Setup

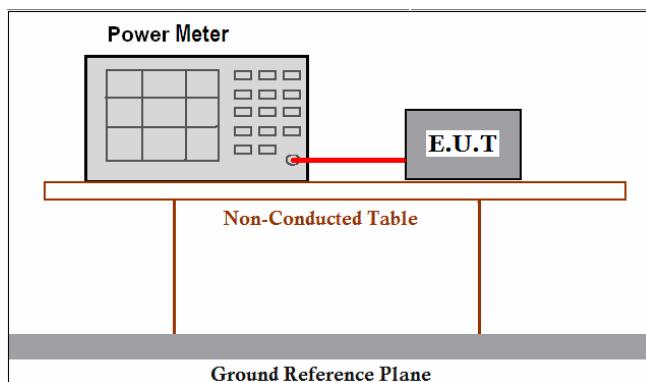

5.5.3 Test Procedure

1. Remove the antenna from the EUT and then connect a low attention attenuation RF cable (Cable loss =0.5dB) from the antenna port to the power meter.
2. Measurement using an RF peak power meter.
3. Report the worse case.

5.5.4 Test Result

Test Item:	Peak Output Power	Temperature :	20°C
Test Engineer:	John	Relative Humidity :	55%

Mode	Channel	Frequency (MHz)	Peak Output Power(dBm)	Limit		Pass/Fail
				(mW)	(dBm)	
802.11b	Low	2412	7.99	1000	30	Pass
	Middle	2437	8.49	1000	30	Pass
	High	2462	8.61	1000	30	Pass
802.11g	Low	2412	9.34	1000	30	Pass
	Middle	2437	9.48	1000	30	Pass
	High	2462	9.63	1000	30	Pass
802.11n (20MHz)	Low	2412	8.91	1000	30	Pass
	Middle	2437	9.36	1000	30	Pass
	High	2462	9.51	1000	30	Pass
802.11n (40MHz)	Low	2422	8.59	1000	30	Pass
	Middle	2437	8.78	1000	30	Pass
	High	2452	8.79	1000	30	Pass

5.6 6dB Emission Bandwidth

5.6.1 Test Requirement

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

5.6.2 Block Diagram of Test Setup



5.6.3 Test Procedure

According to KDB 558074 D01 DTS Meas Guidance v03r02 clause8.1 Option 1:

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times \text{RBW}$.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.


5.6.4 Test Result

Pass


Test Item:	6dB Emission Bandwidth	Temperature :	23°C
Test Engineer:	John	Relative Humidity :	55%

Mode	Channel	Frequency (MHz)	6dB Bandwidth(MHz)	Limit(KHz)
802.11b	Low	2412	10.110	≥500
	Middle	2437	10.111	≥500
	High	2462	10.107	≥500
802.11g	Low	2412	16.510	≥500
	Middle	2437	16.539	≥500
	High	2462	16.532	≥500
802.11n (20MHz)	Low	2412	17.765	≥500
	Middle	2437	17.798	≥500
	High	2462	17.788	≥500
802.11n (40MHz)	Low	2422	36.421	≥500
	Middle	2437	36.445	≥500
	High	2452	36.462	≥500


802.11 b Mode

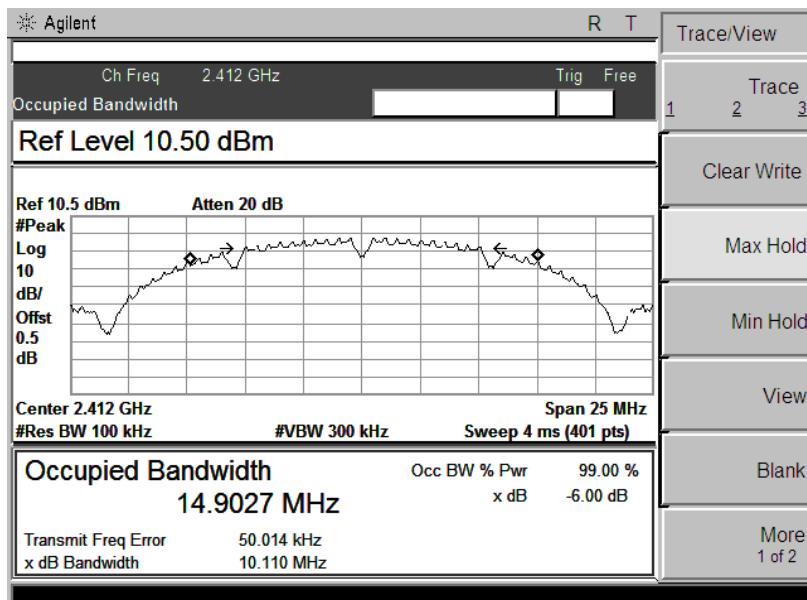

Ch 1

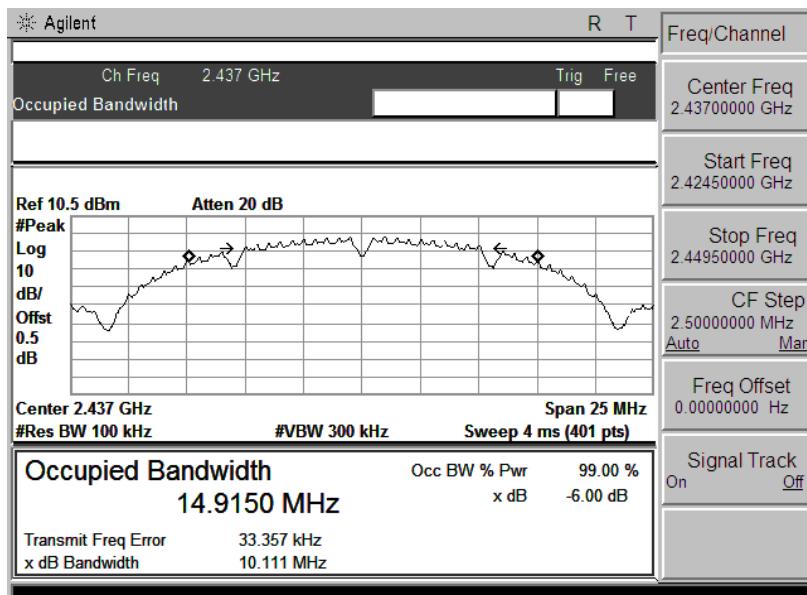


Ch 6

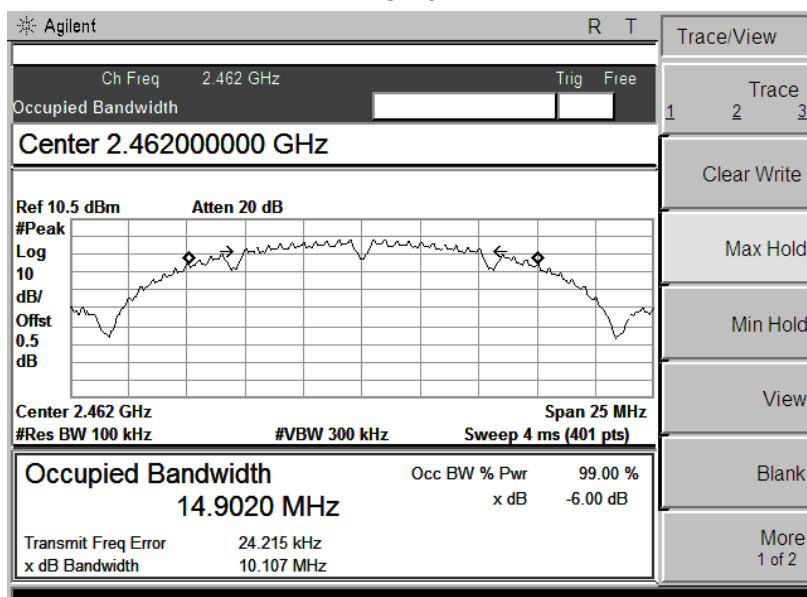


Ch 11


802.11 g Mode

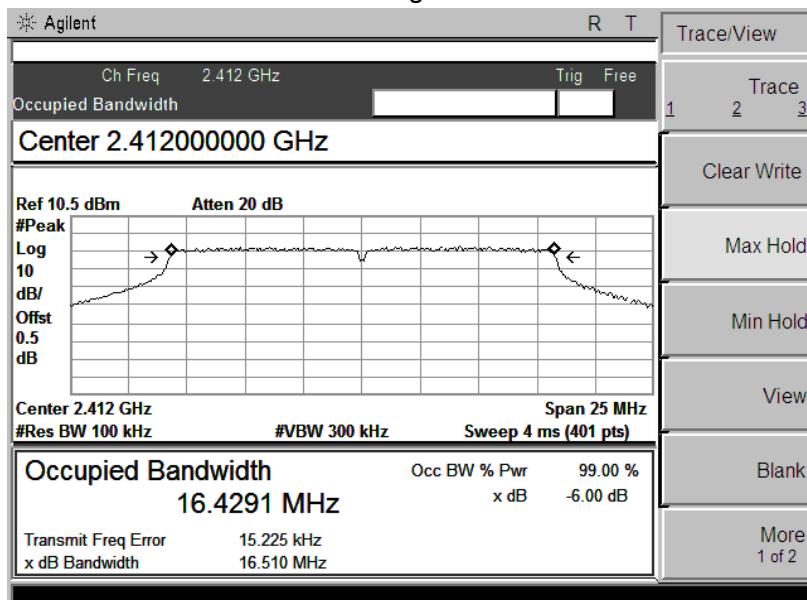

Ch 1

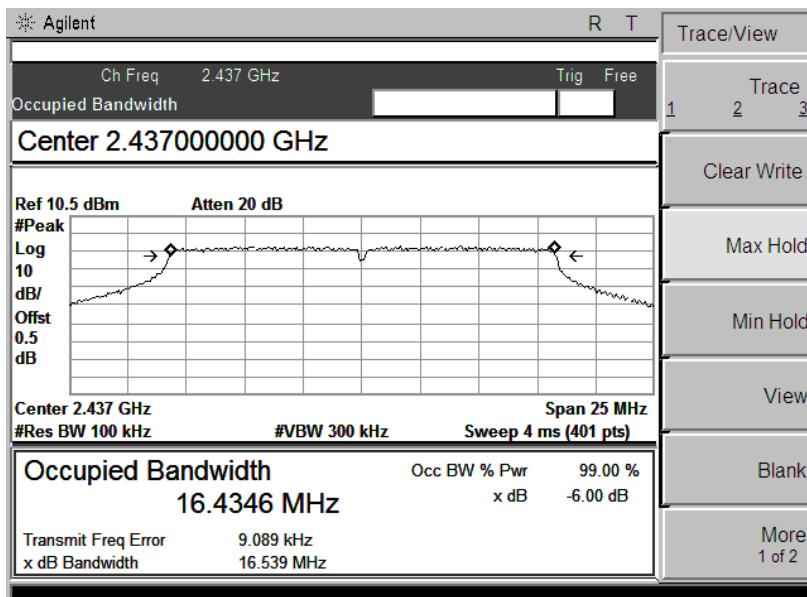


Ch 6

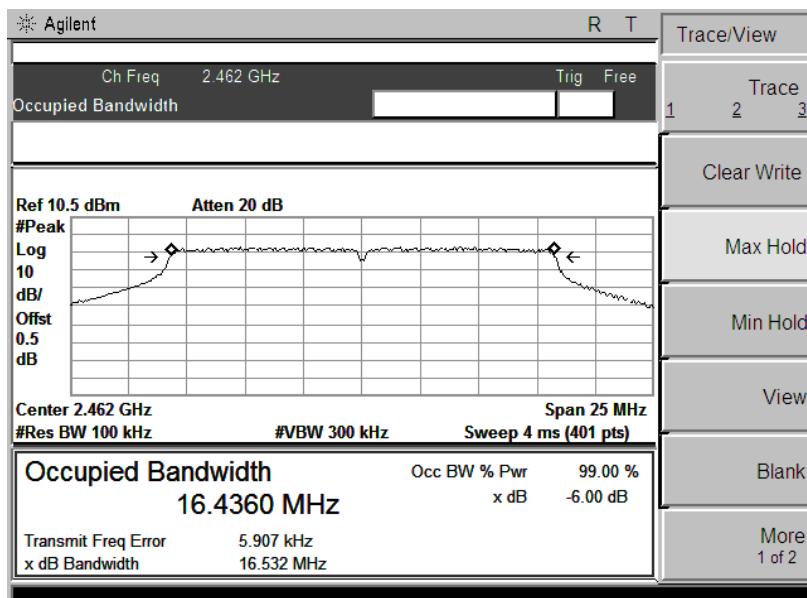


Ch 11


802.11 n(20M) Mode

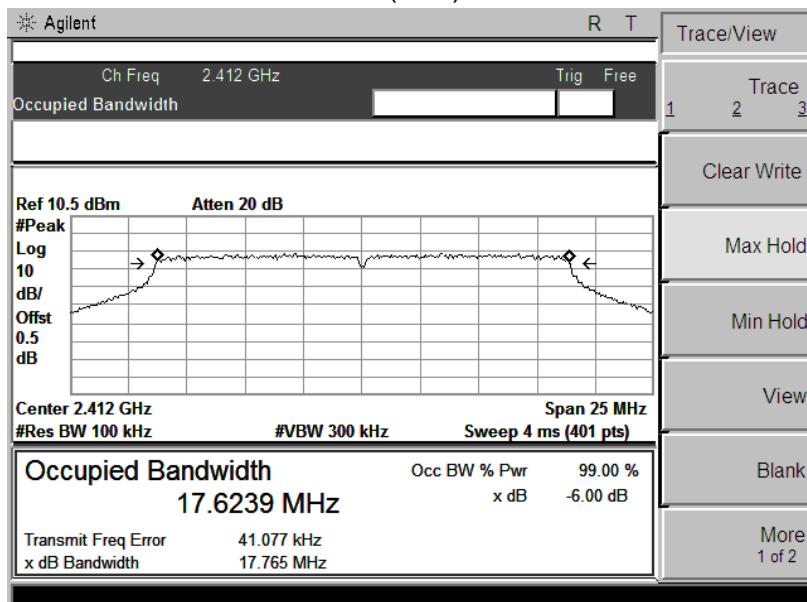

Ch 1

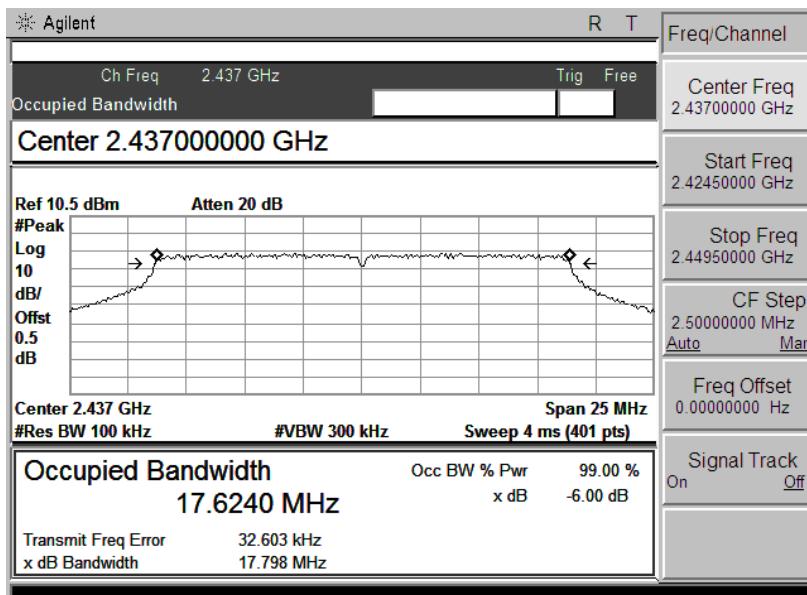


Ch 6

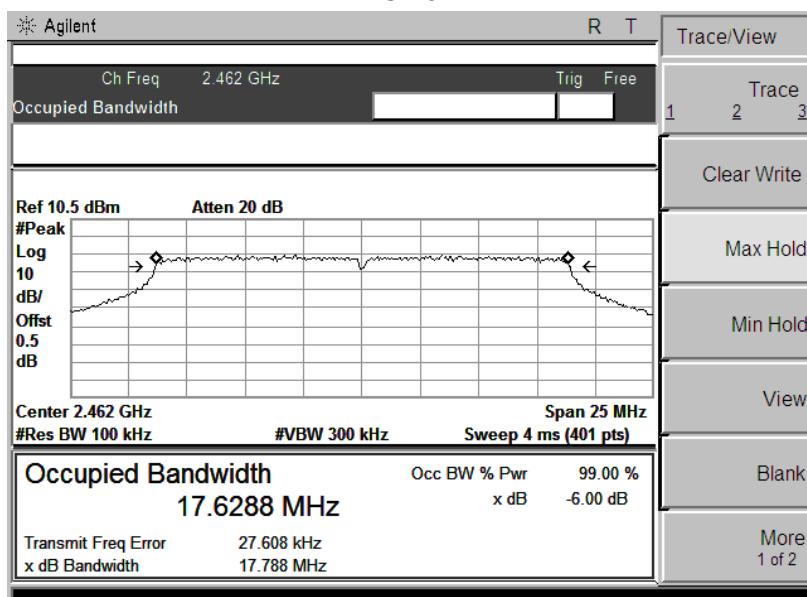


Ch 11


802.11 n(40M) Mode

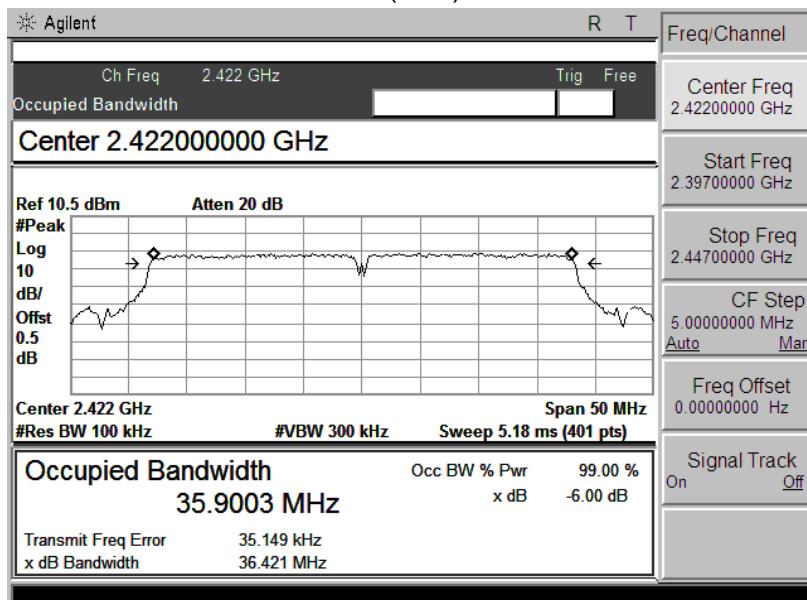

Ch 3

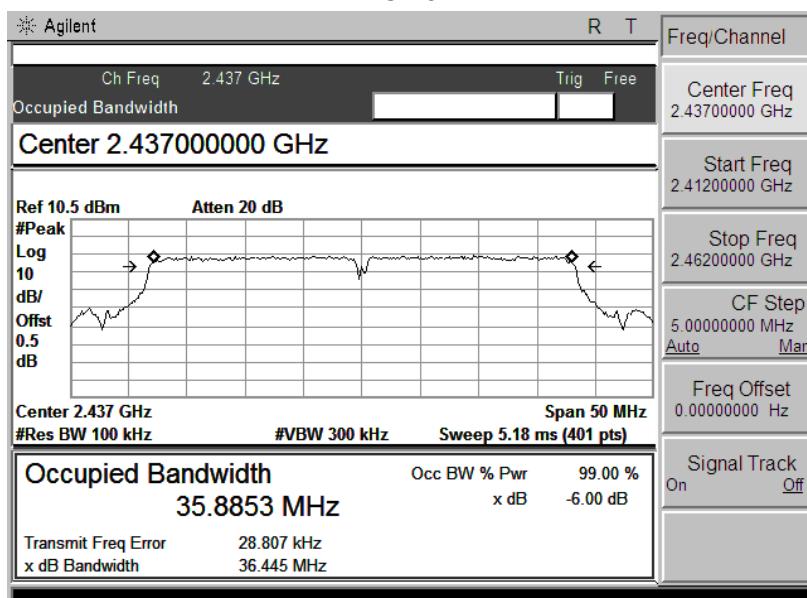

Ch 6

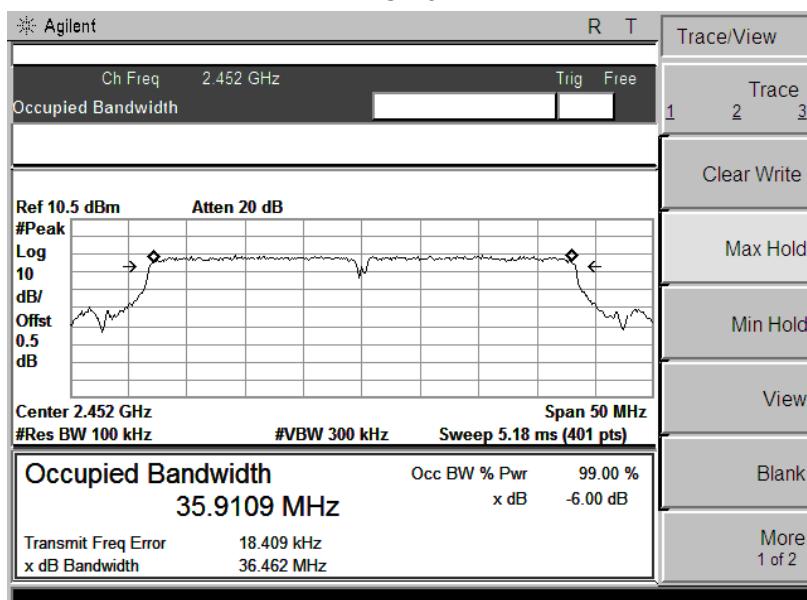

Ch 9

5.7 POWER SPECTRAL DENSITY

5.7.1 Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

5.7.2 Block Diagram of Test Setup



5.7.3 Test Procedure

According to KDB 558074 D01 DTS Meas Guidance v03r01clause10.2:


- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 times the DTS bandwidth.
- c) Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d) Set the VBW $\geq 3 \times \text{RBW}$.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.
- j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

5.7.4 Test Result

Test Item:	POWER SPECTRAL DENSITY	Temperature :	20°C
Test Engineer:	John	Relative Humidity :	55%

Mode	Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Result
802.11b	Low	2412	-21.16	≤8	Pass
	Middle	2437	-20.74	≤8	Pass
	High	2462	-21.14	≤8	Pass
802.11g	Low	2412	-20.98	≤8	Pass
	Middle	2437	-20.85	≤8	Pass
	High	2462	-24.65	≤8	Pass
802.11n (20MHz)	Low	2412	-24.90	≤8	Pass
	Middle	2437	-23.77	≤8	Pass
	High	2462	-23.57	≤8	Pass
802.11n (40MHz)	Low	2422	-22.50	≤8	Pass
	Middle	2437	-22.54	≤8	Pass
	High	2452	-21.99	≤8	Pass

802.11 b Mode

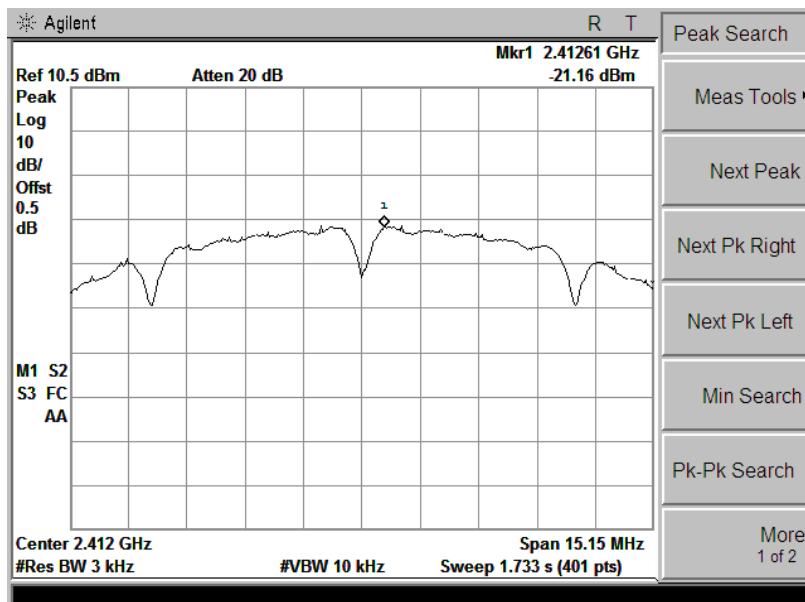

Ch 1




Ch 6




Ch 11


802.11 g Mode

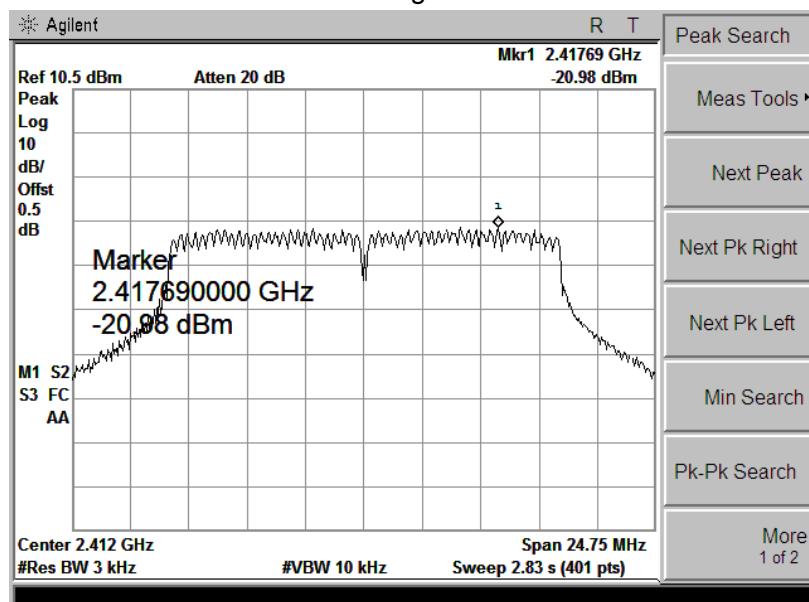

Ch 1

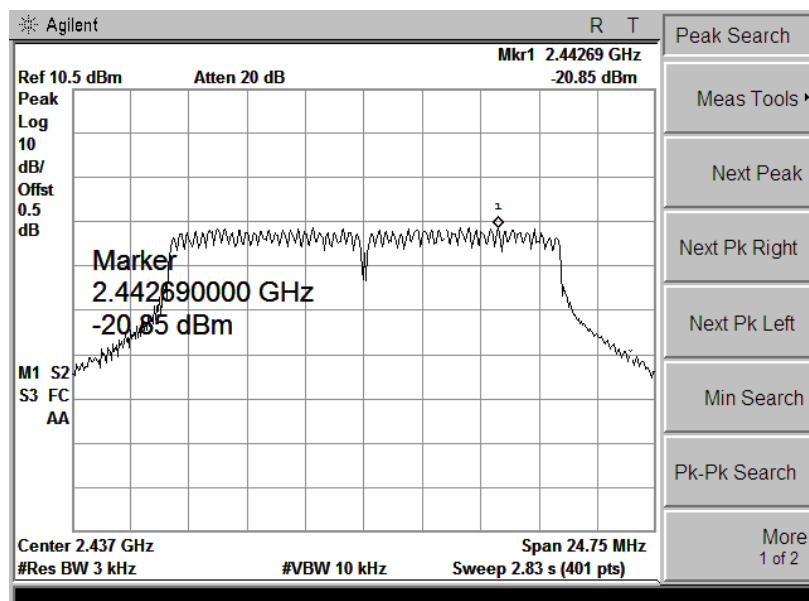


Ch 6

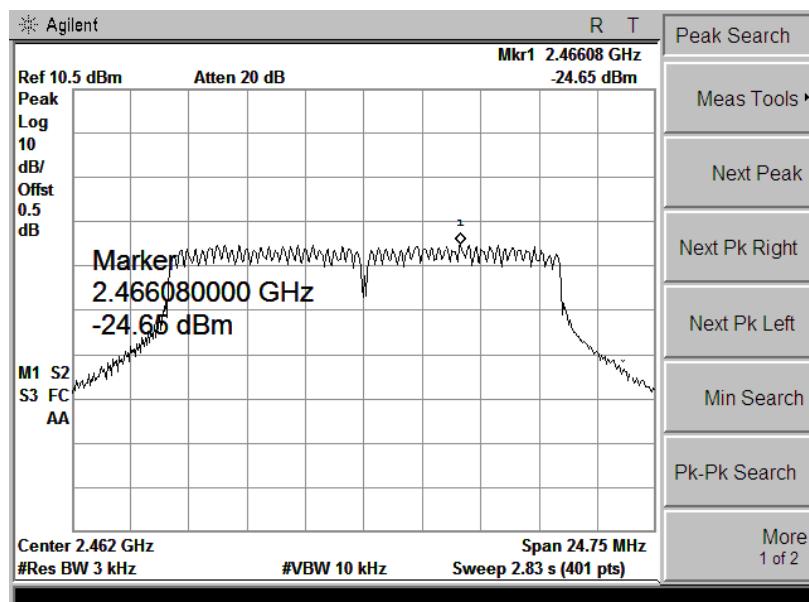


Ch 11


802.11 n(20M) Mode

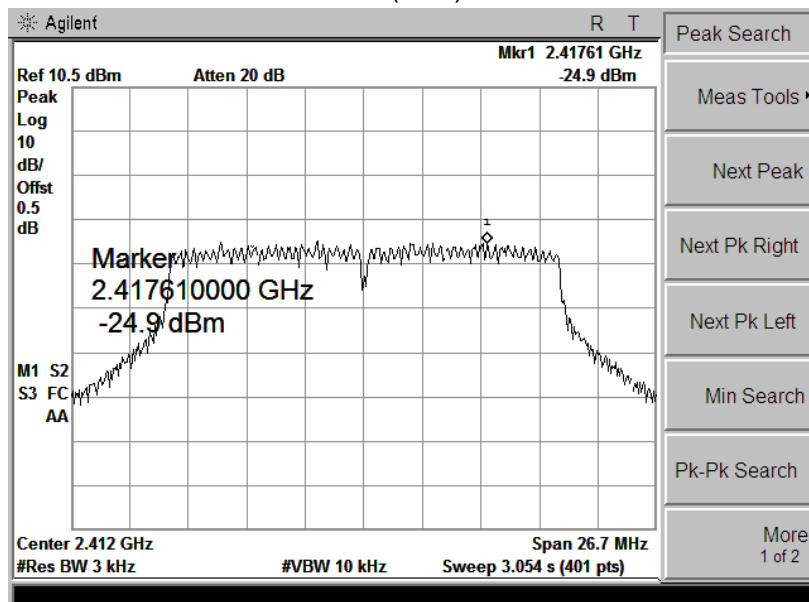

Ch 1



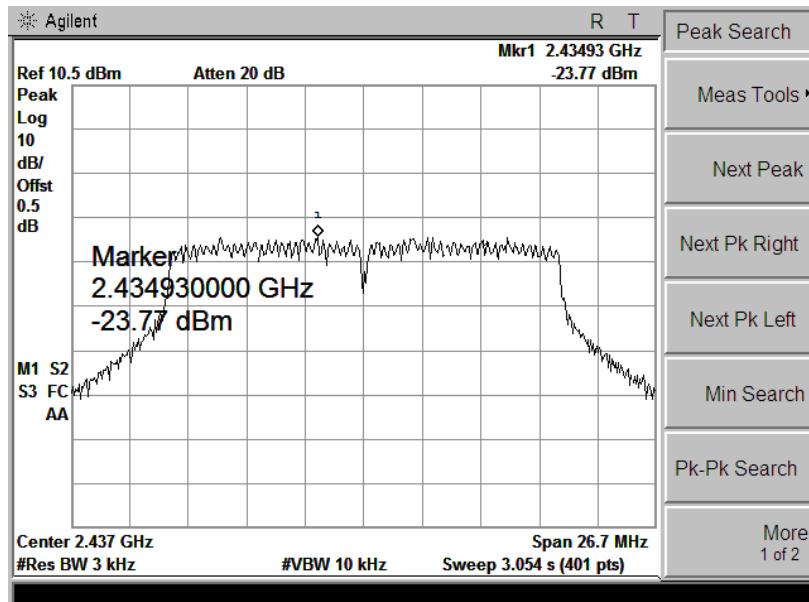


Ch 6

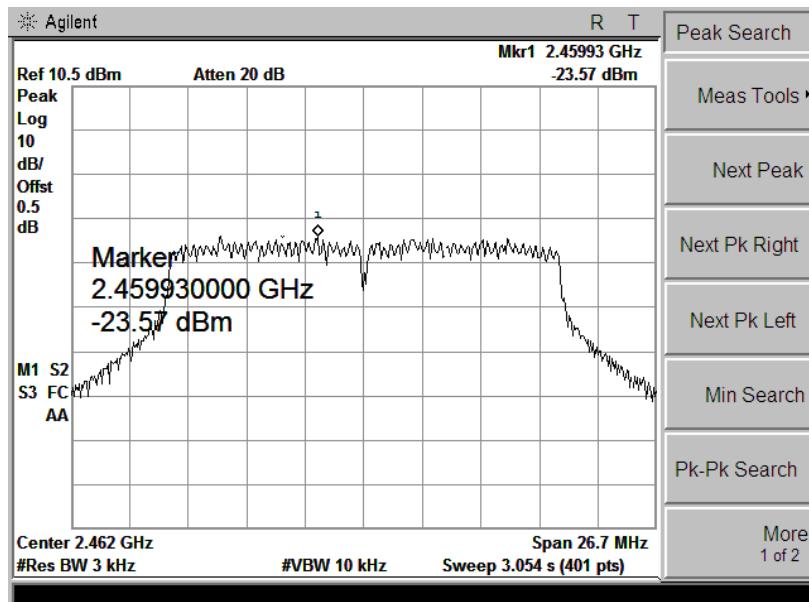

Ch 11

802.11 n(40M) Mode

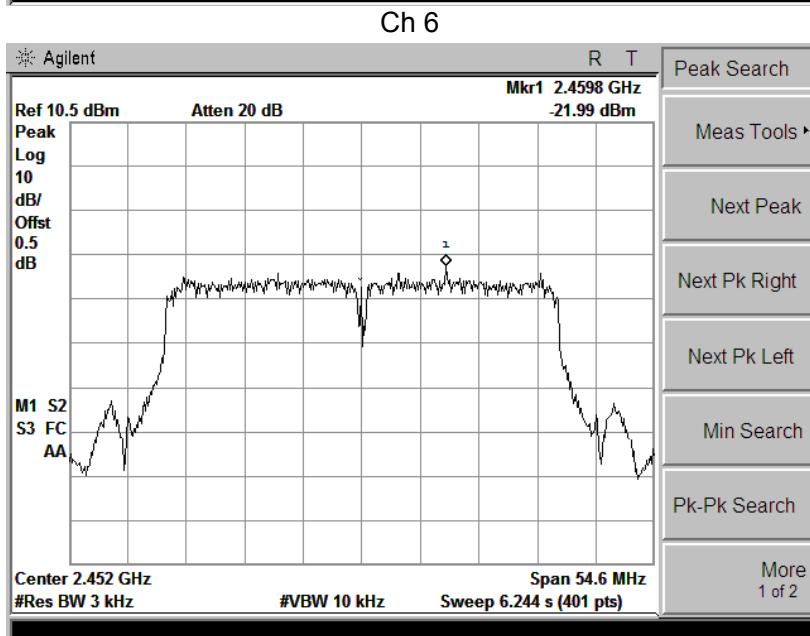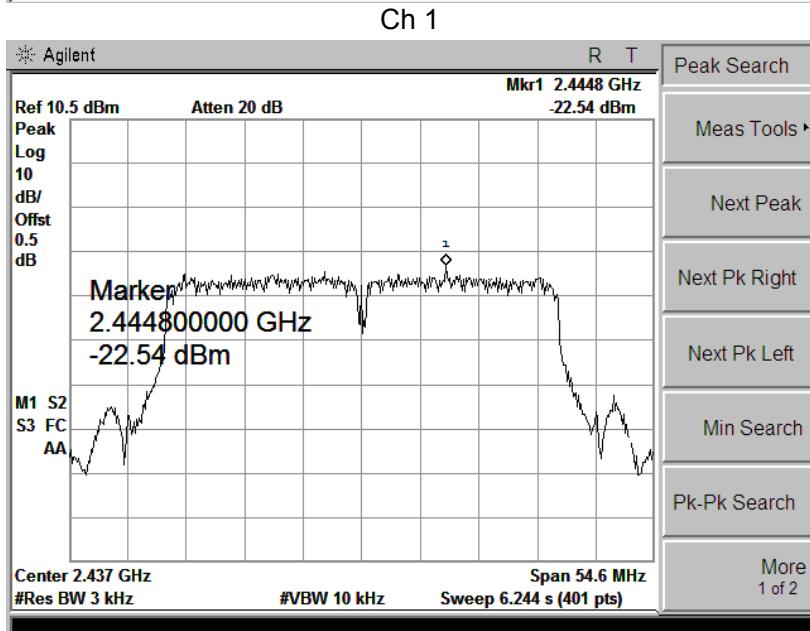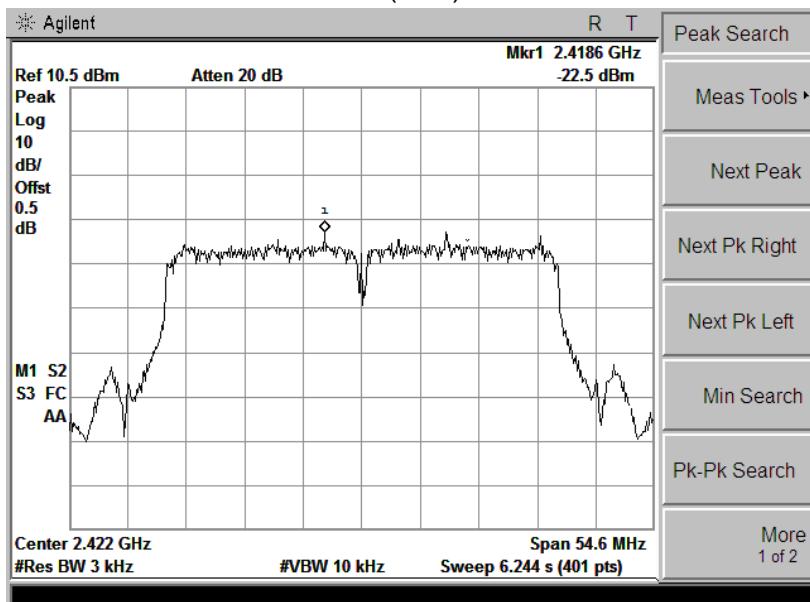

Ch 9

5.8 Band Edge and Conducted Spurious Emissions

5.8.1 Test Requirement

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.

5.8.2 Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.


5.8.3 Test Result

Pass


Remark:

During the Conducted Spurious Emissions test, pre-scan the 802.11b, 802.11g, 802.11n(20/40)modulation, and found the 802.11b modulation which it is worse case.


Test Item:	Band Edge	Temperature :	23°C
Test Engineer:	John	Relative Humidity :	65%

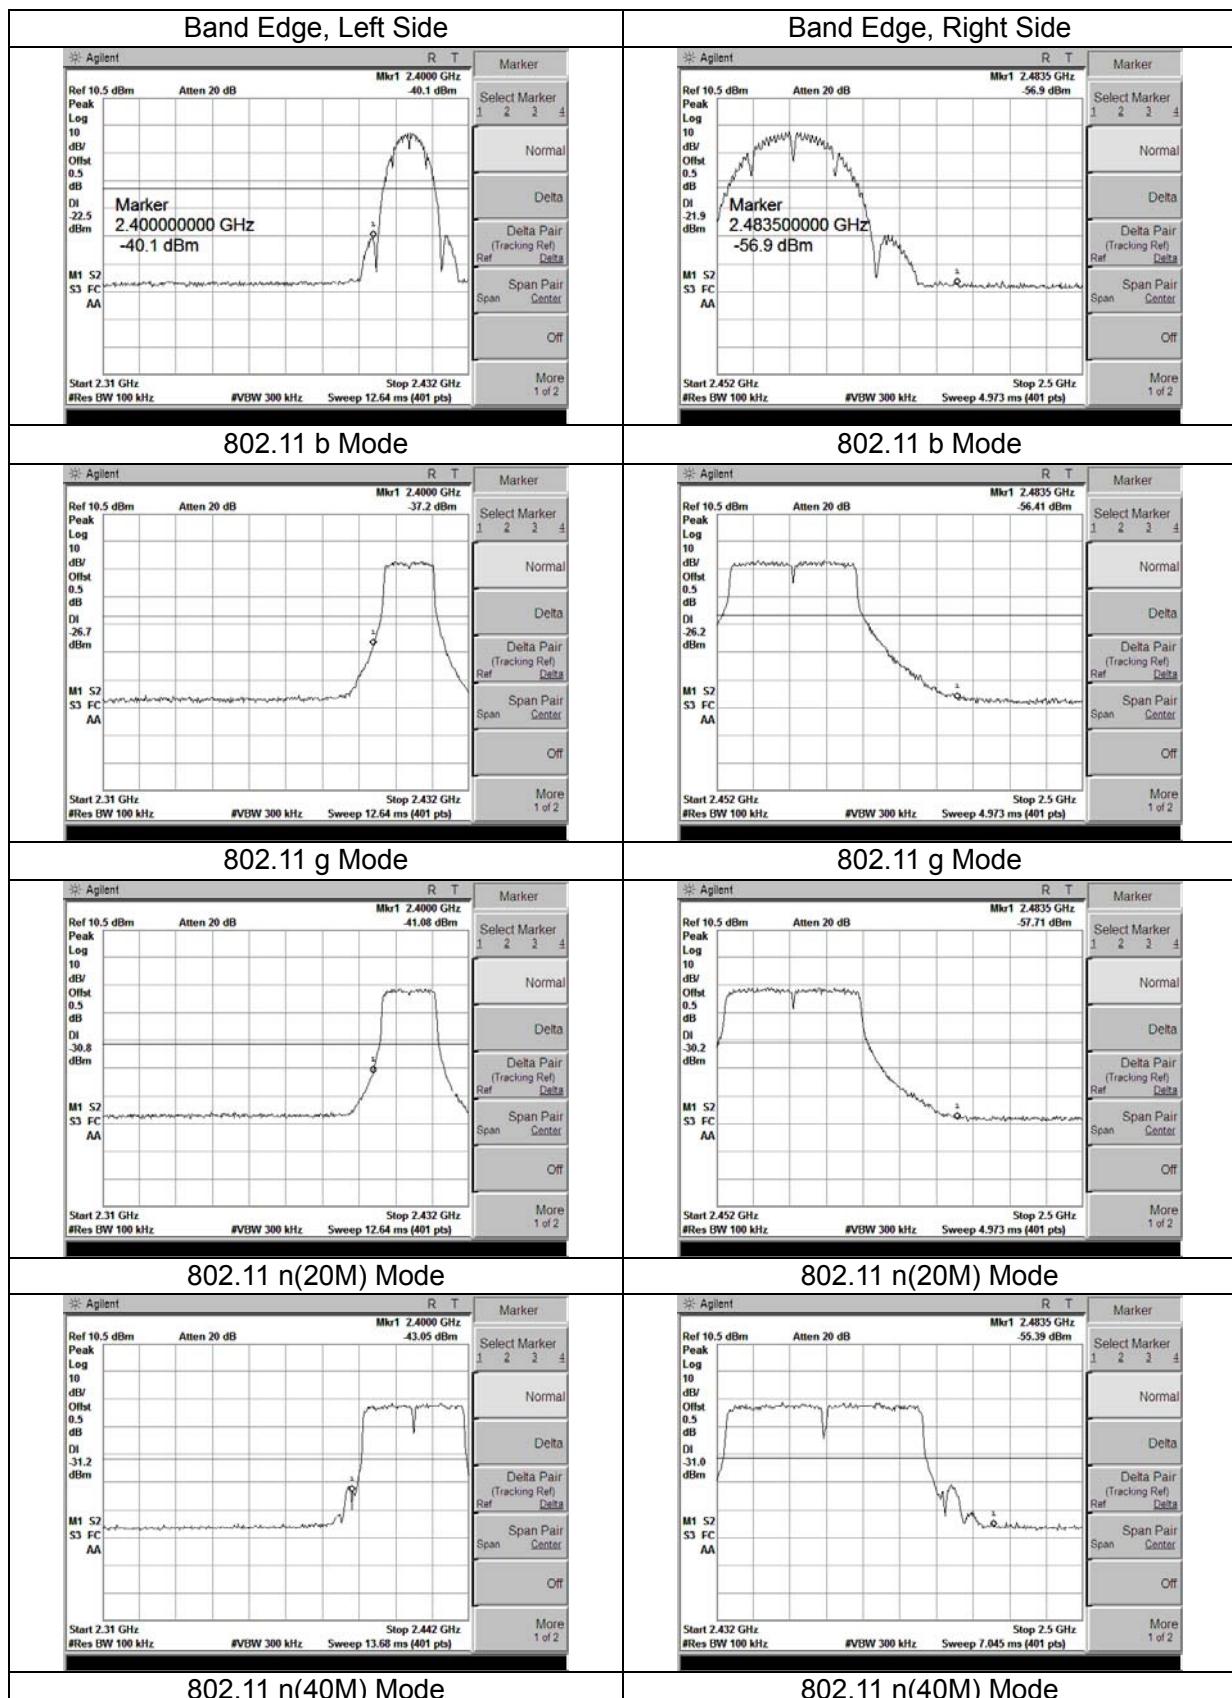

Conducted Spurious Emissions

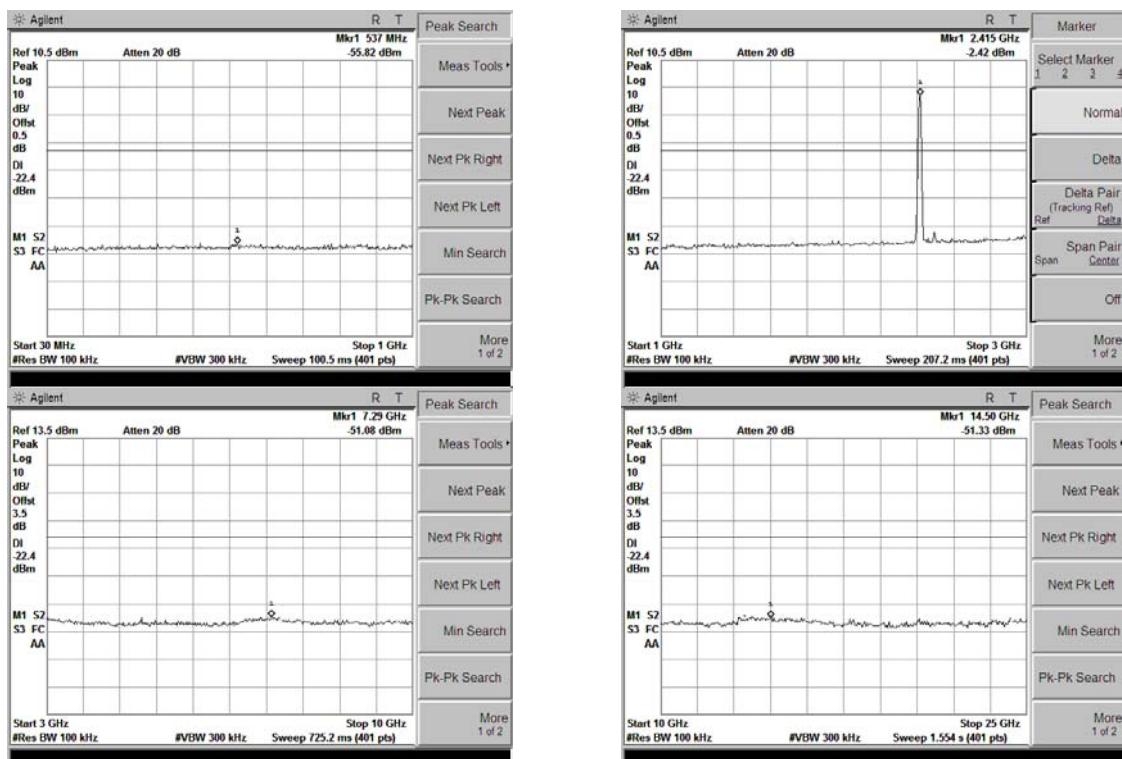


802.11b Mode, Ch1

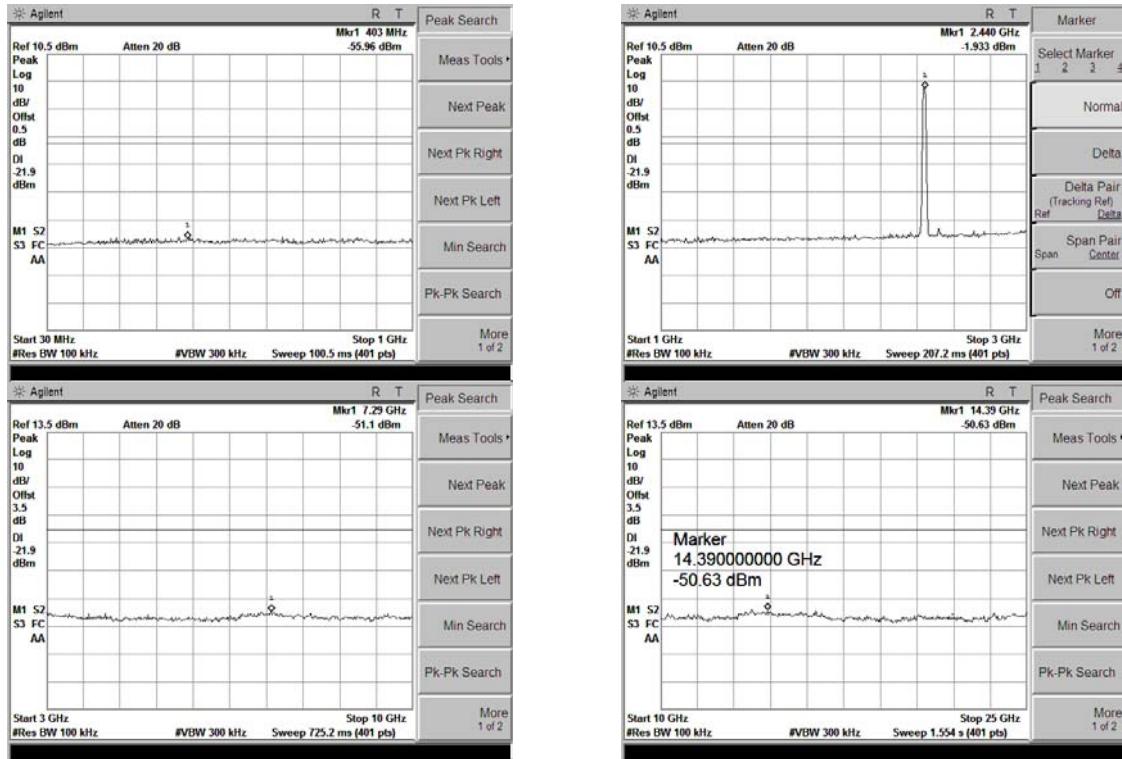


802.11b Mode, Ch6

Conducted Spurious Emissions

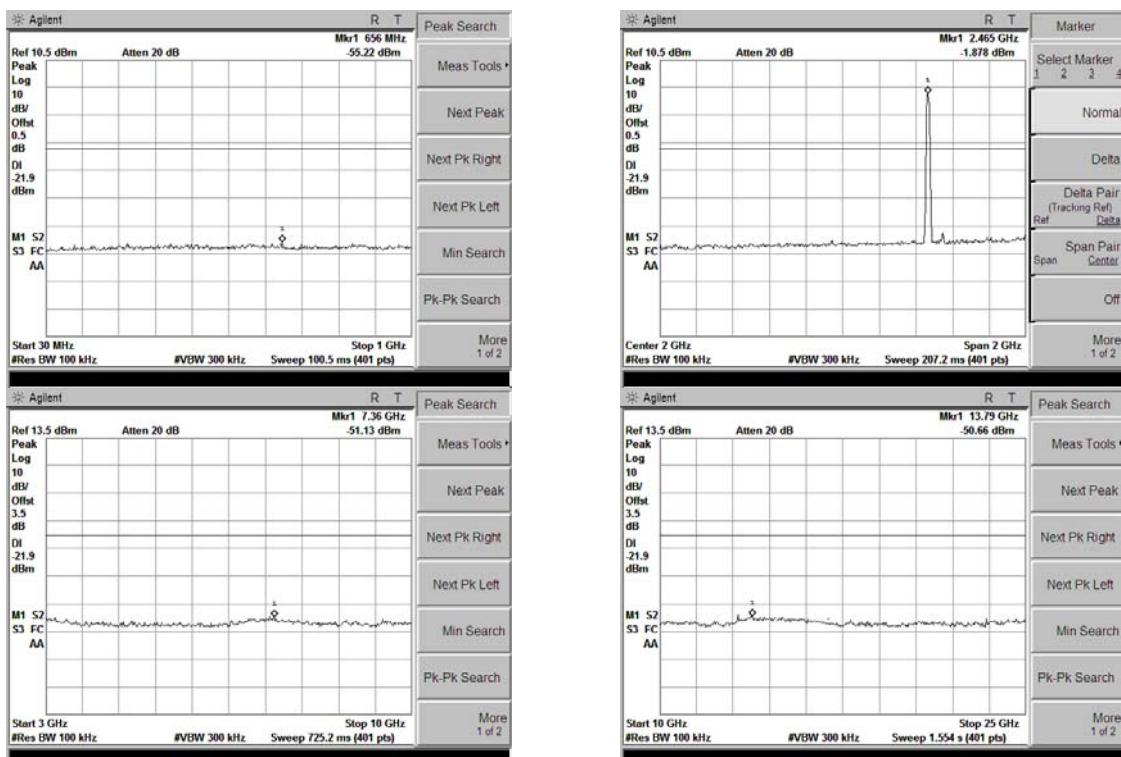


802.11b Mode, Ch11

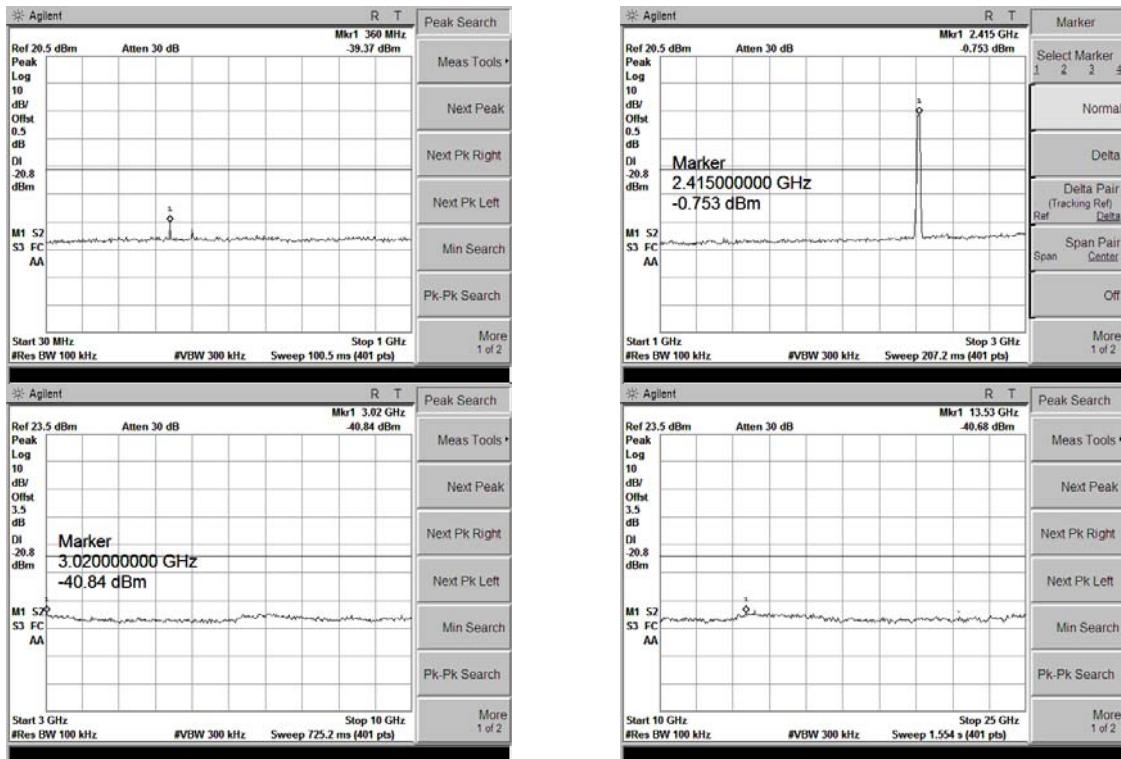


802.11g Mode, Ch1

Conducted Spurious Emissions

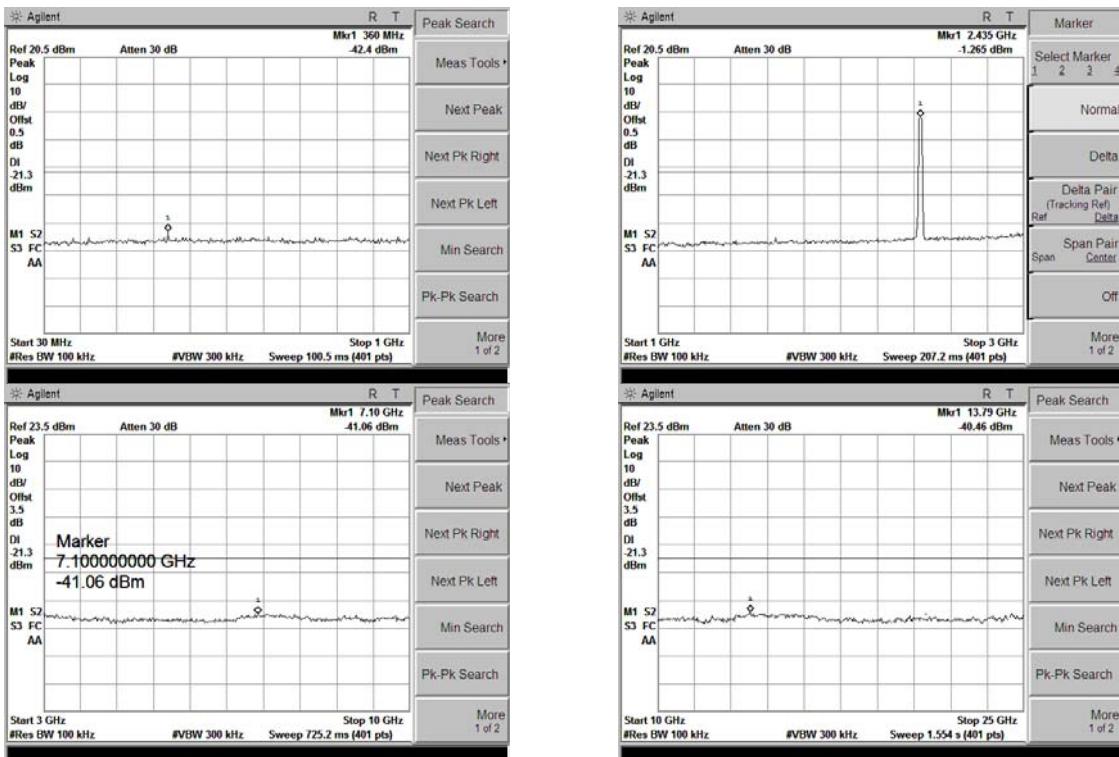


802.11g Mode, Ch6

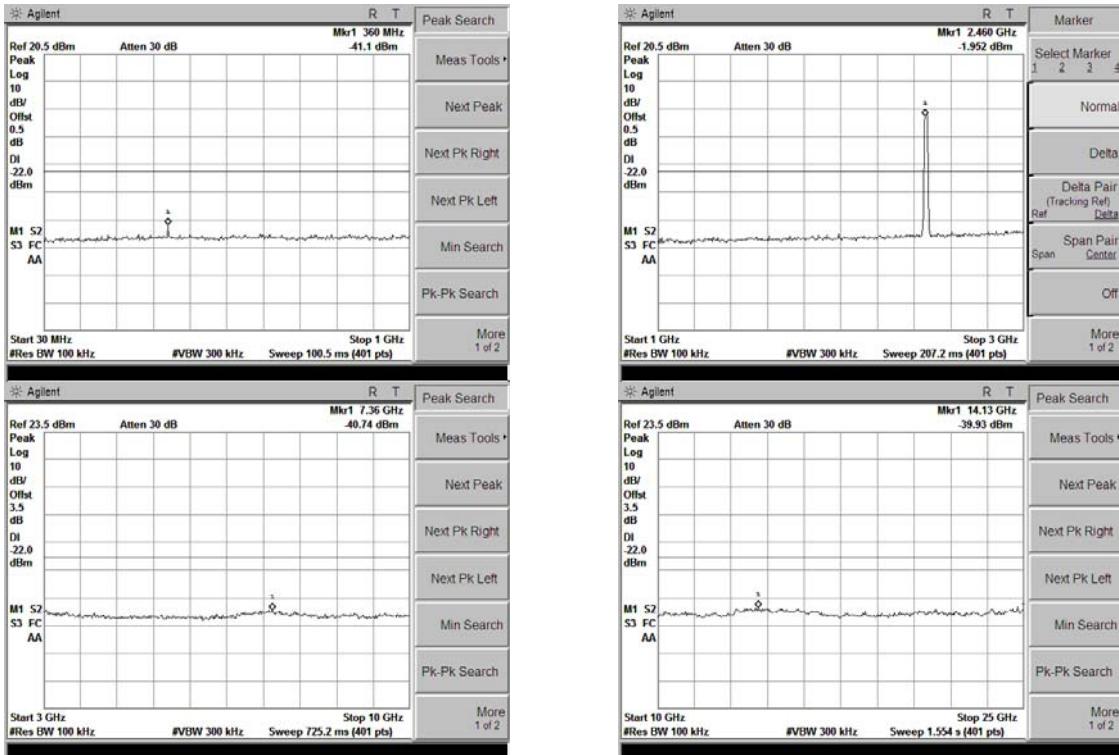


802.11g Mode, Ch11

Conducted Spurious Emissions

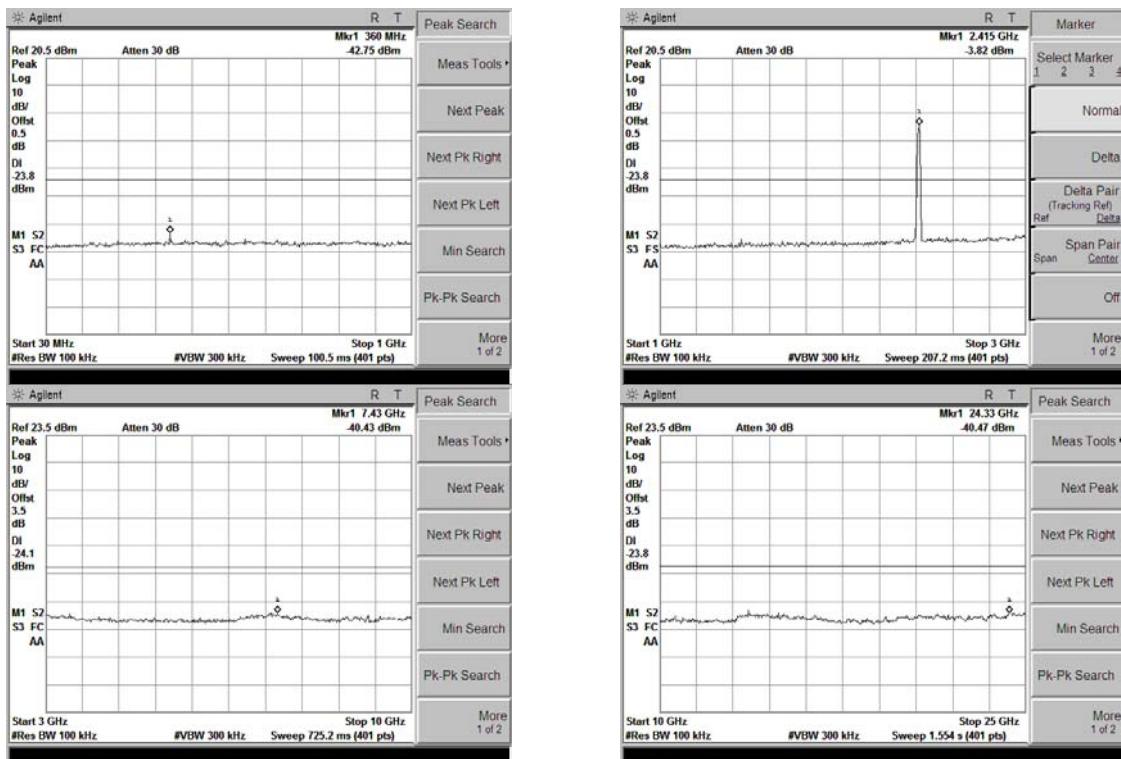


802.11 n(20M) Mode, Ch1

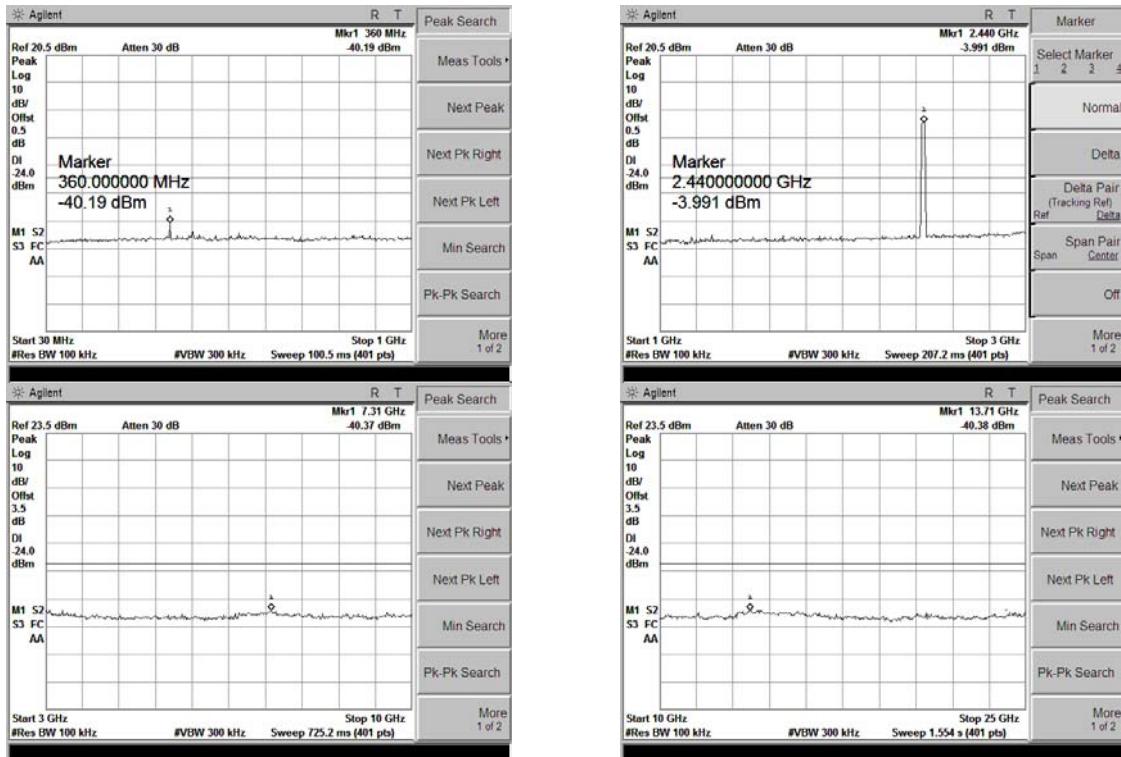


802.11 n(20M) Mode, Ch6

Conducted Spurious Emissions




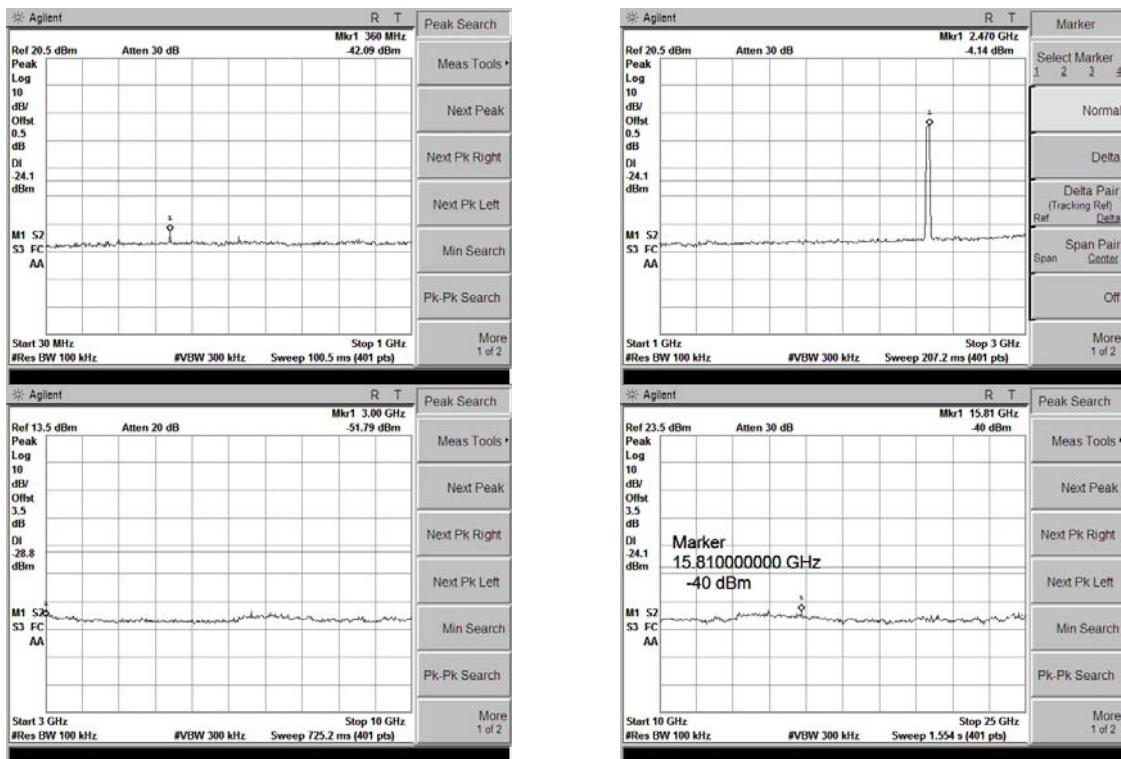


802.11 n(20M) Mode, Ch11


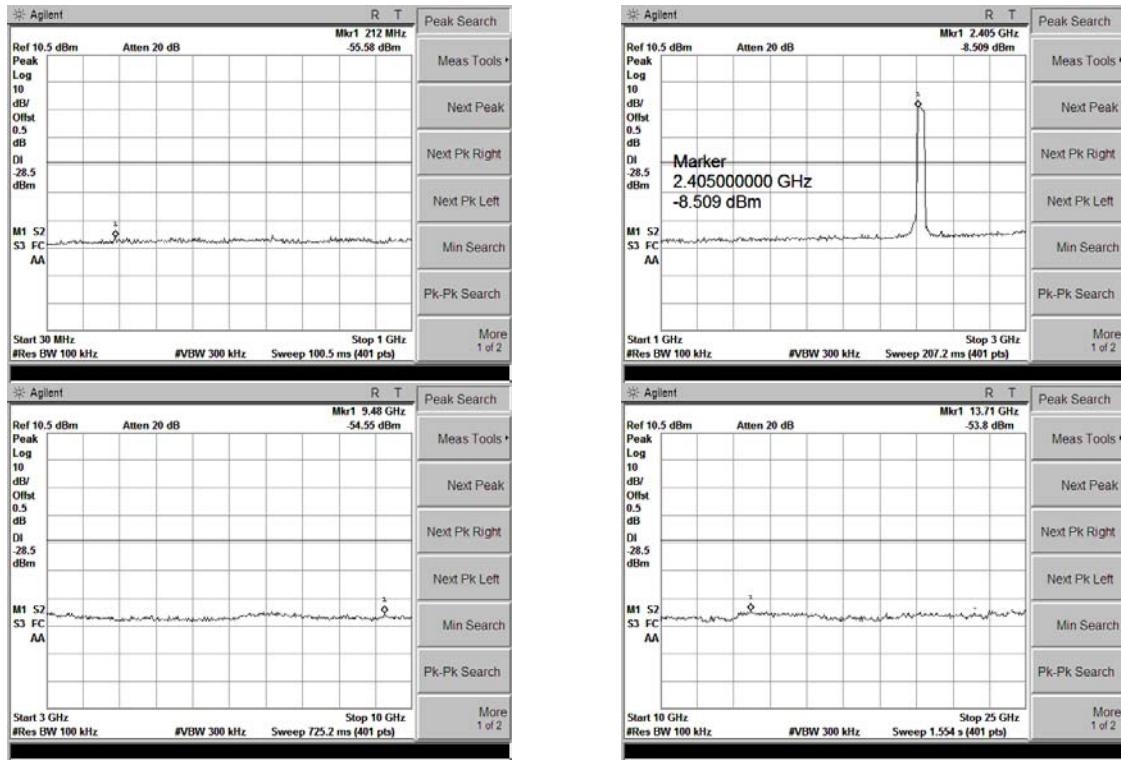


802.11 n(40M) Mode, Ch3

Conducted Spurious Emissions

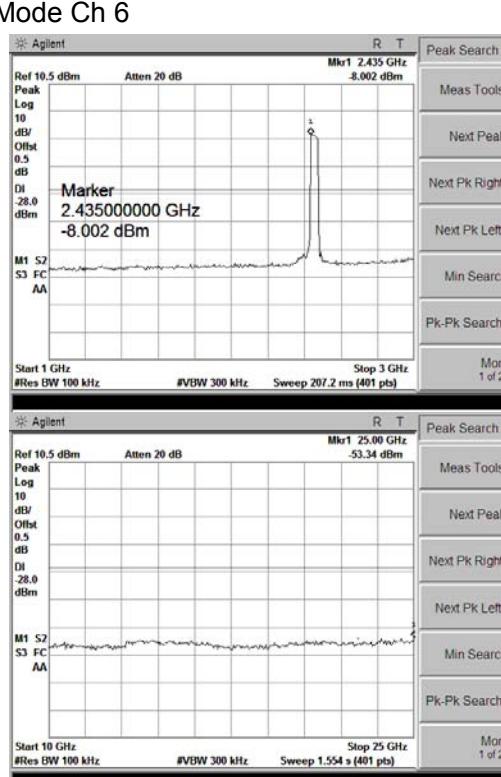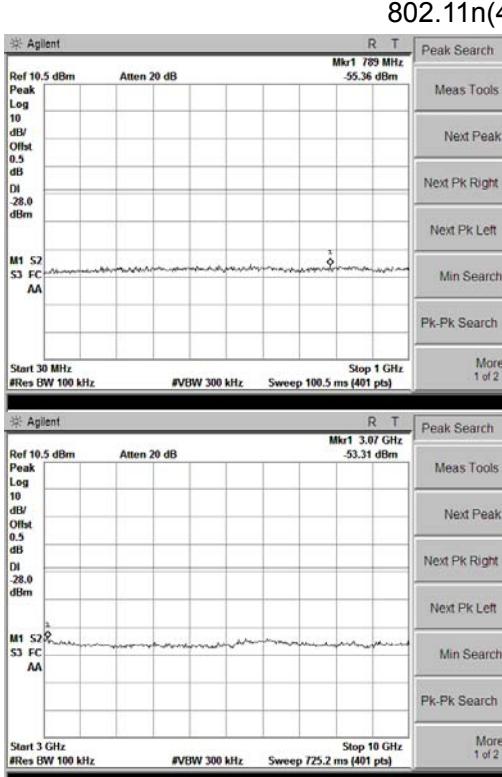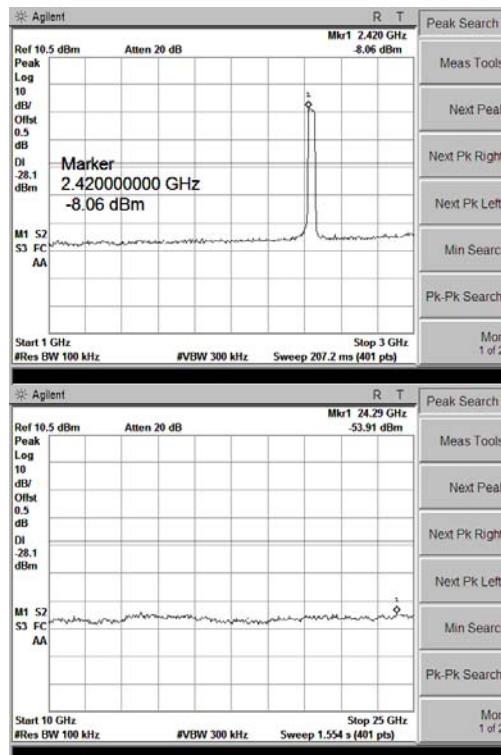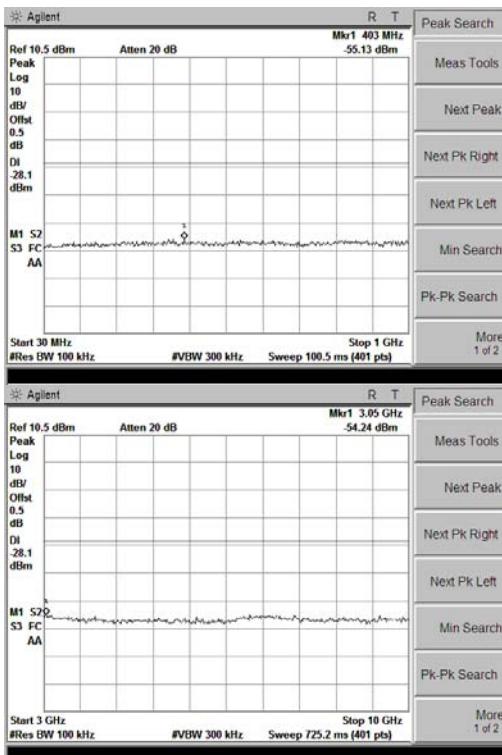

802.11n(40MHz) Mode Ch 6

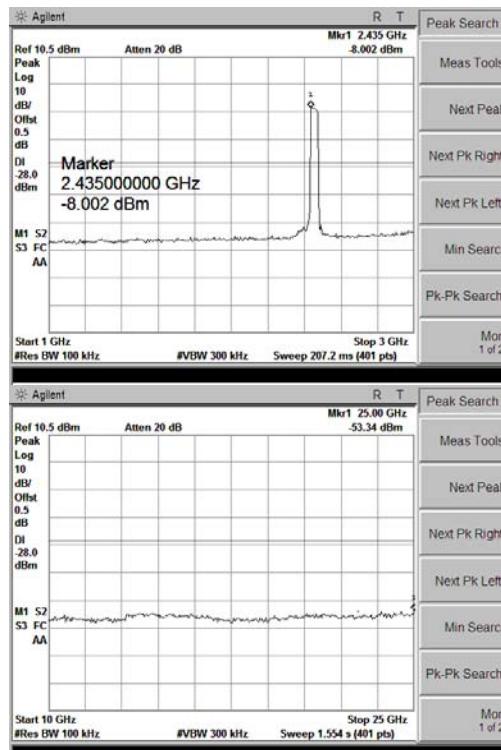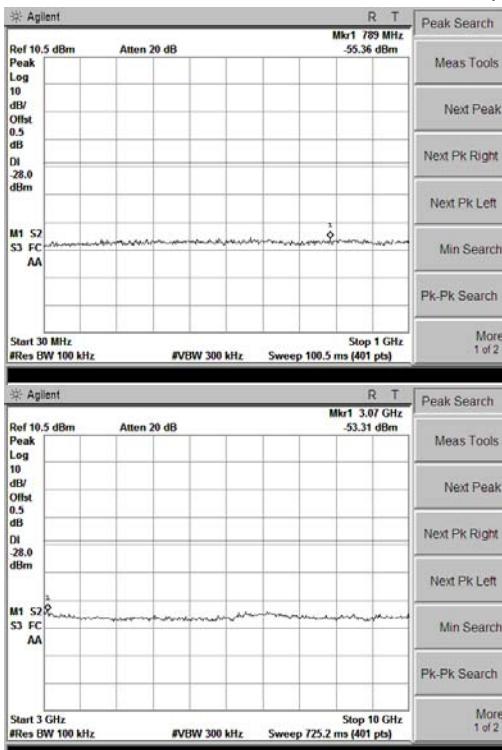

802.11n(40MHz) Mode Ch 9


5.9 Restricted Frequency Bands

5.9.1 Test Requirement

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

5.9.2 Test Configuration

Test Setup:

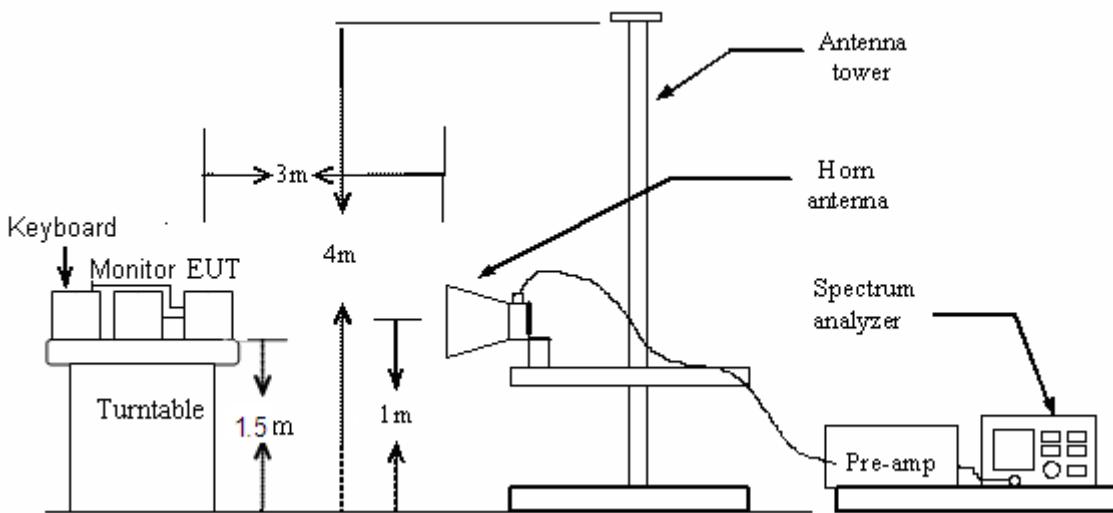

5.9.3 Test Procedure:

1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the table was turned from 0 degrees to 360 degrees to find the maximum reading.


5.9.4 Test Result

Pass

Note: All test modes are performed, only the worst case is recorded in this report.

Please refer the following plots.


EUT:	TND Tablet	M/N:	TNDT80B
Mode:	802.11b-CH1	Phase:	Vertical
Test by:	John	Power:	DC 3.7V by Battery
Temperature: / Humidity	23.7°C / 51.6%	Test date:	2016-07-13

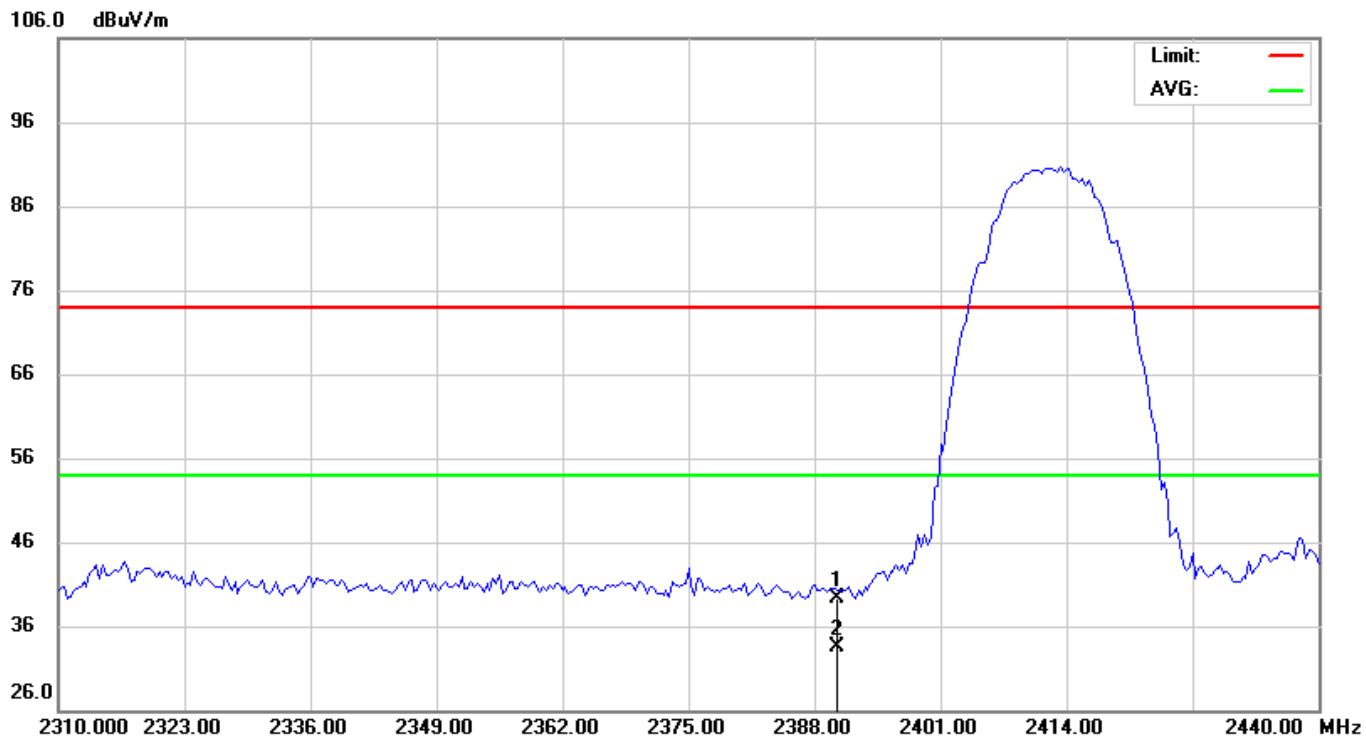

No.	Mk.	Reading		Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table	
		Freq.	Level						dB	dBuV/m
1		2390.000	47.68	-8.43	39.25	74.00	-34.75	peak		
2	*	2390.000	41.94	-8.43	33.51	54.00	-20.49	AVG		

*:Maximum data x:Over limit !:over margin


EUT:	TND Tablet	M/N:	TNDT80B
Mode:	802.11b-CH1	Phase:	Horizontal
Test by:	John	Power:	DC 3.7V by Battery
Temperature: / Humidity	23.7°C / 51.6%	Test date:	2016-07-13

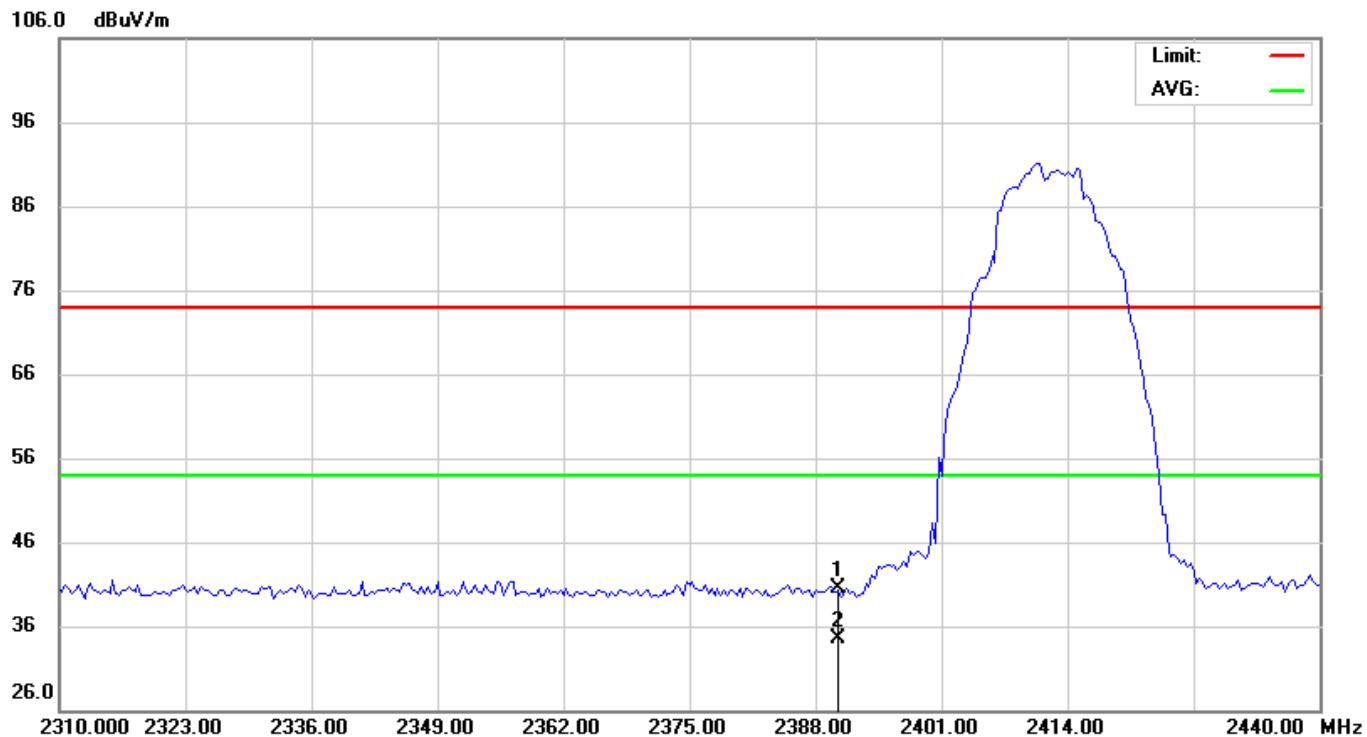

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		2390.000	49.03	-8.43	40.60	74.00	-33.40	peak		
2	*	2390.000	42.96	-8.43	34.53	54.00	-19.47	AVG		

*:Maximum data x:Over limit !:over margin


EUT:	TND Tablet	M/N:	TNDT80B
Mode:	802.11b-CH11	Phase:	Vertical
Test by:	John	Power:	DC 3.7V by Battery
Temperature: / Humidity	23.7°C / 51.6%	Test date:	2016-07-13

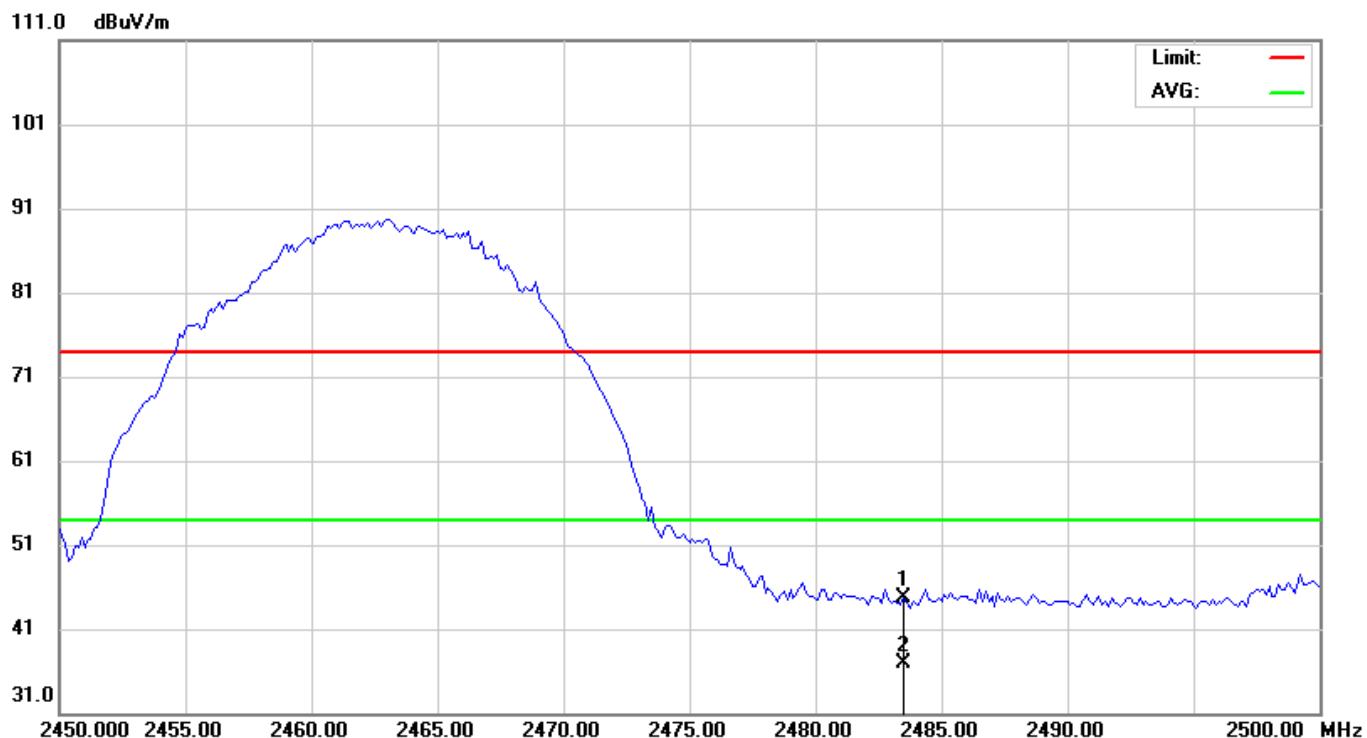

No.	Mk.	Reading		Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		Freq.	Level						dB	Detector
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		2483.500	52.96	-8.29	44.67	74.00	-29.33	peak		
2	*	2483.500	45.23	-8.29	36.94	54.00	-17.06	AVG		


*:Maximum data x:Over limit !:over margin

EUT:	TND Tablet	M/N:	TNDT80B
Mode:	802.11b-CH11	Phase:	Horizontal
Test by:	John	Power:	DC 3.7V by Battery
Temperature: / Humidity	23.7°C / 51.6%	Test date:	2016-07-13

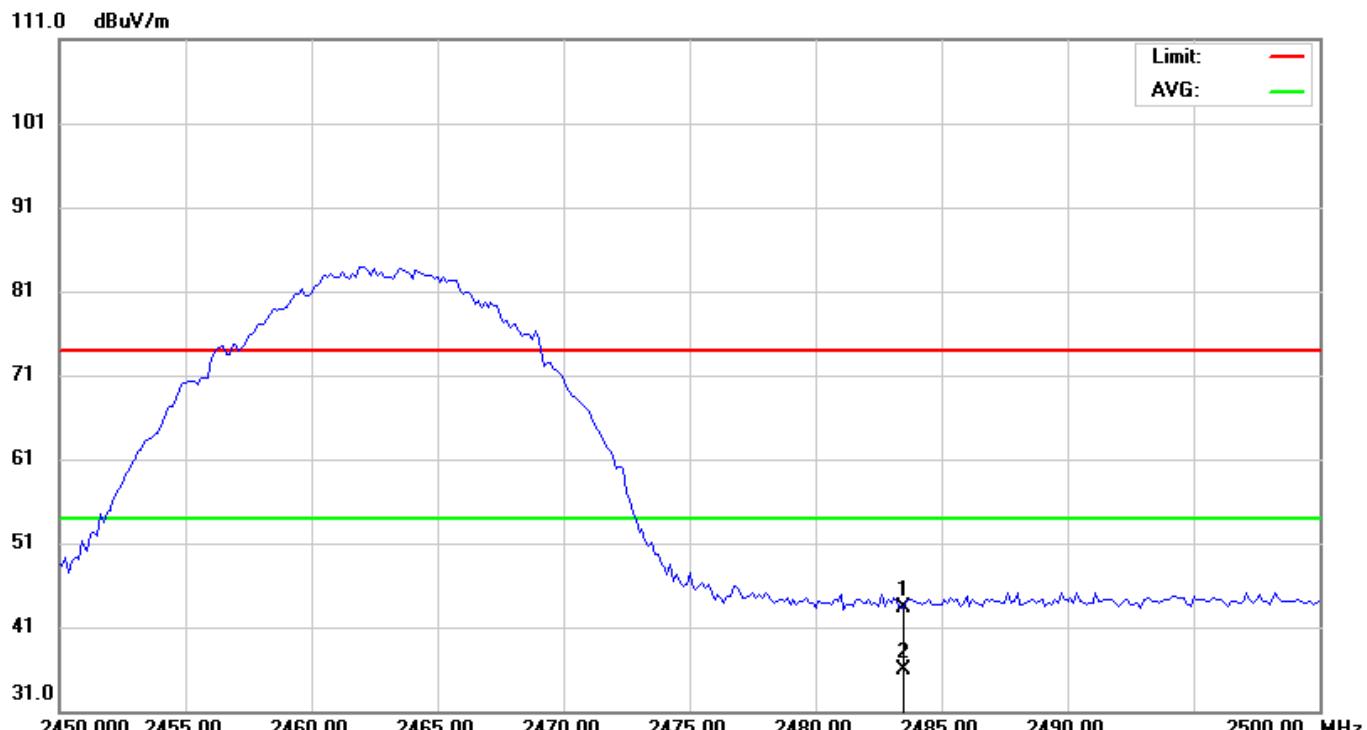

*:Maximum data x:Over limit !:over margin


EUT:	TND Tablet	M/N:	TNDT80B
Mode:	802.11g-CH1	Phase:	Vertical
Test by:	John	Power:	DC 3.7V by Battery
Temperature: / Humidity	23.7°C / 51.6%	Test date:	2016-07-13

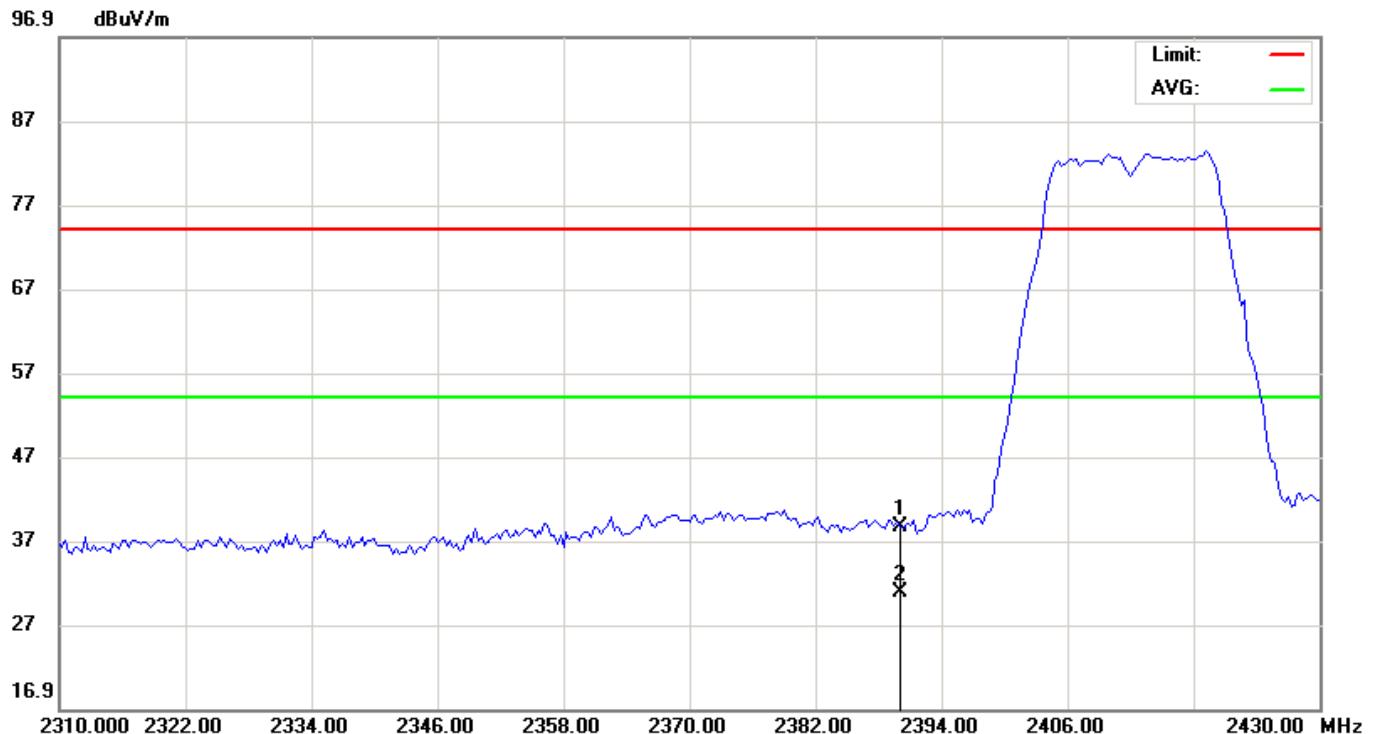

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dB	Detector	cm	degree	
1		2390.000	46.99	-8.43	38.56	74.00	-35.44	peak		
2	*	2390.000	39.28	-8.43	30.85	54.00	-23.15	AVG		

*:Maximum data x:Over limit !:over margin


EUT:	TND Tablet	M/N:	TNDT80B
Mode:	802.11g-CH1	Phase:	Horizontal
Test by:	John	Power:	DC 3.7V by Battery
Temperature: / Humidity	23.7°C / 51.6%	Test date:	2016-07-13

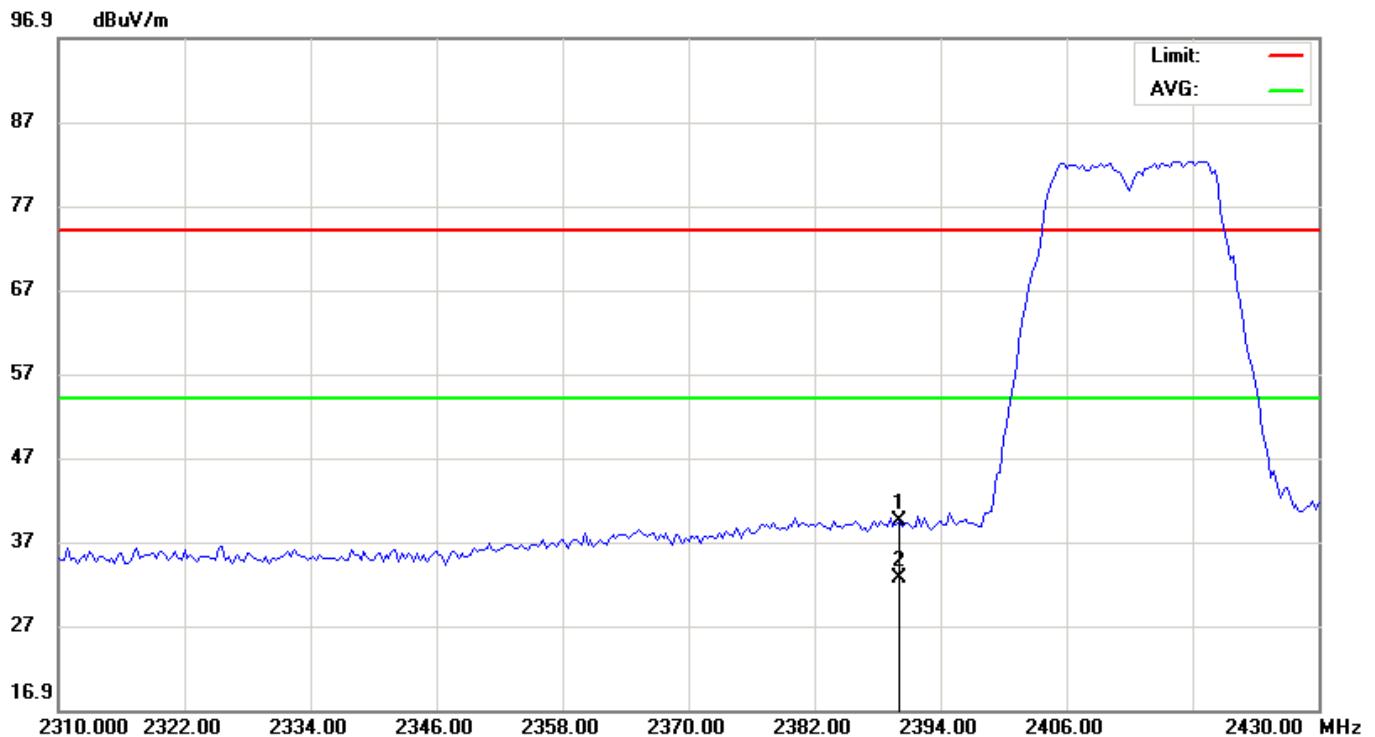

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB	Detector	cm	degree	Comment
1		2390.000	47.84	-8.43	39.41	74.00	-34.59	peak		
2	*	2390.000	41.11	-8.43	32.68	54.00	-21.32	AVG		

*:Maximum data x:Over limit !:over margin


EUT:	TND Tablet	M/N:	TNDT80B
Mode:	802.11g-CH11	Phase:	Vertical
Test by:	John	Power:	DC 3.7V by Battery
Temperature: / Humidity	23.7°C / 51.6%	Test date:	2016-07-13

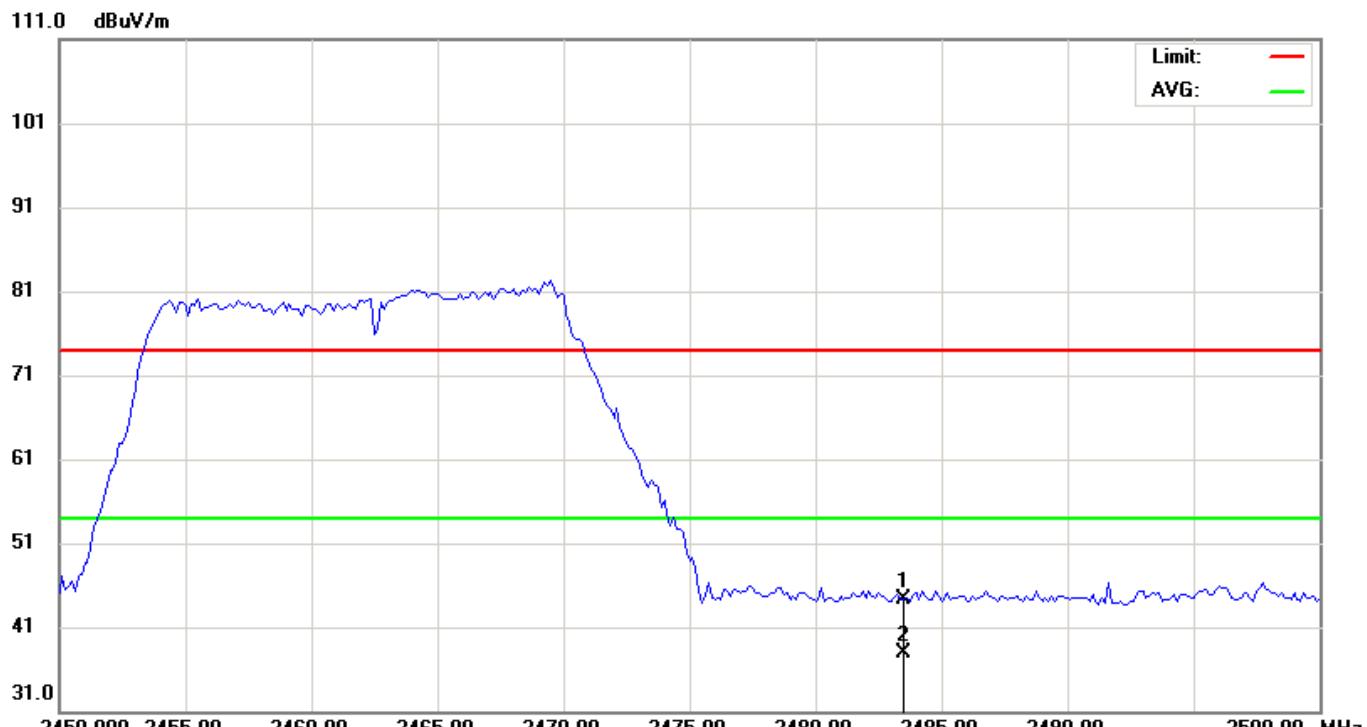

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dB _{UV}	dB	dB _{UV} /m	dB _{UV} /m	dB	Detector	cm	degree
1		2483.500	52.55	-8.29	44.26	74.00	-29.74	peak		
2	*	2483.500	46.17	-8.29	37.88	54.00	-16.12	AVG		

*:Maximum data x:Over limit !:over margin


EUT:	TND Tablet	M/N:	TNDT80B
Mode:	802.11g-CH11	Phase:	Horizontal
Test by:	John	Power:	DC 3.7V by Battery
Temperature: / Humidity	23.7°C / 51.6%	Test date:	2016-07-13

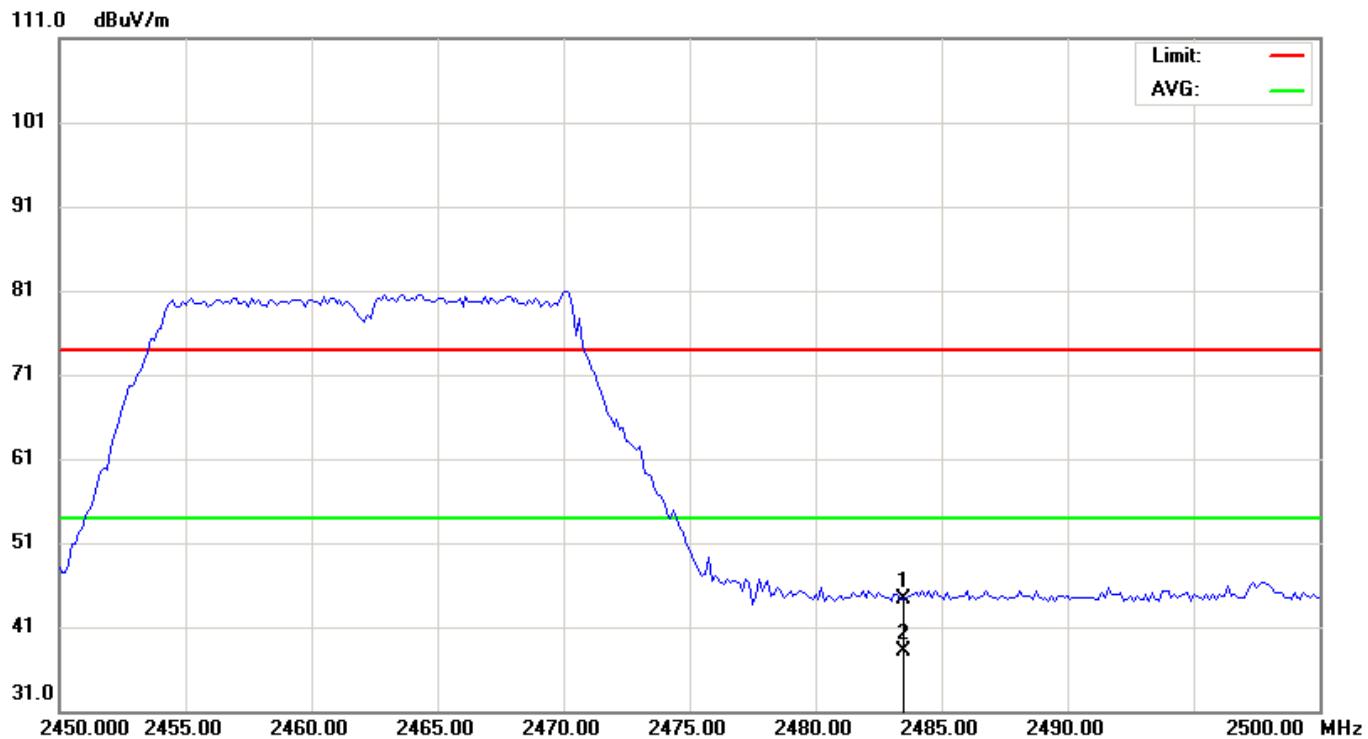

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		2483.500	52.57	-8.29	44.28	74.00	-29.72	peak		
2	*	2483.500	46.38	-8.29	38.09	54.00	-15.91	AVG		

*:Maximum data x:Over limit !:over margin


EUT:	TND Tablet	M/N:	TNDT80B
Mode:	802.11 n(20M)-CH1	Phase:	Vertical
Test by:	John	Power:	DC 3.7V by Battery
Temperature: / Humidity	23.7°C / 51.6%	Test date:	2016-07-13

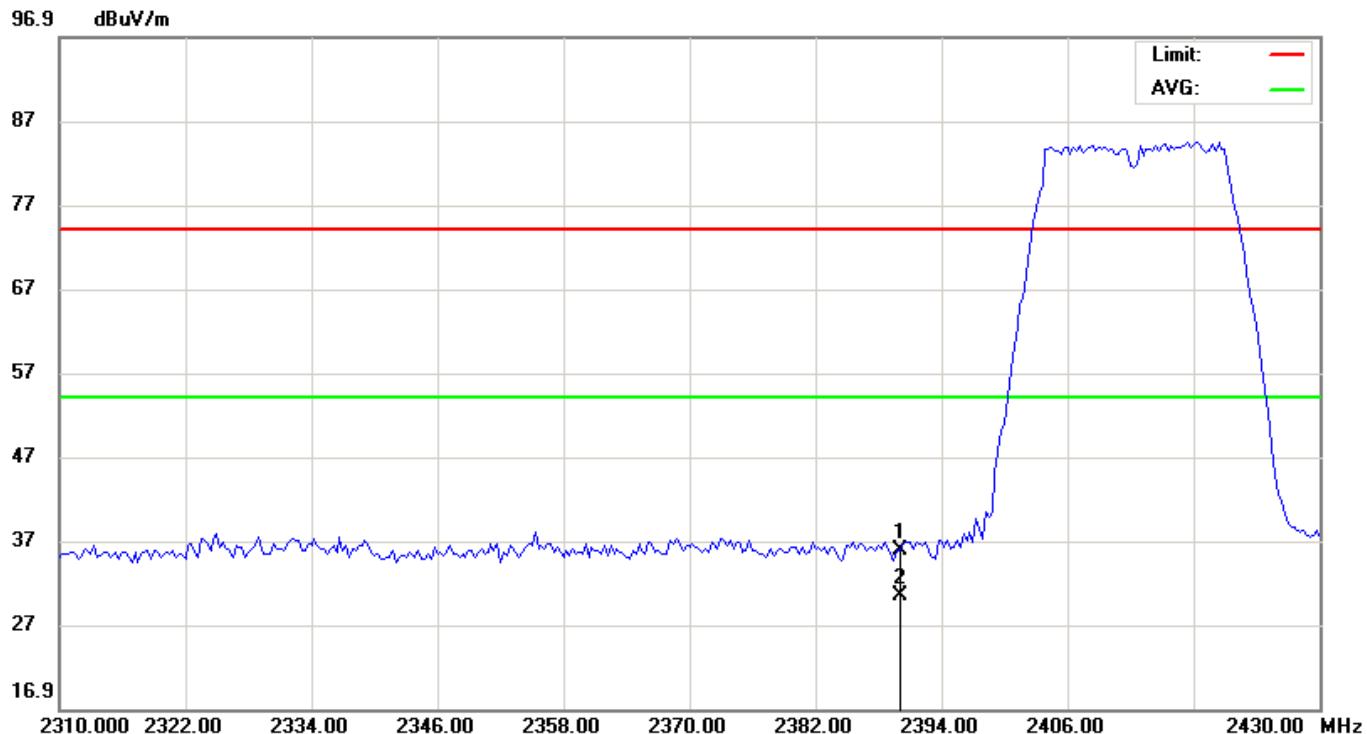

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dB	Detector	cm	degree	
1		2390.000	44.20	-8.43	35.77	74.00	-38.23	peak		
2	*	2390.000	38.80	-8.43	30.37	54.00	-23.63	AVG		

*:Maximum data x:Over limit !:over margin


EUT:	TND Tablet	M/N:	TNDT80B
Mode:	802.11 n(20M)-CH1	Phase:	Horizontal
Test by:	John	Power:	DC 3.7V by Battery
Temperature: / Humidity	23.7°C / 51.6%	Test date:	2016-07-13

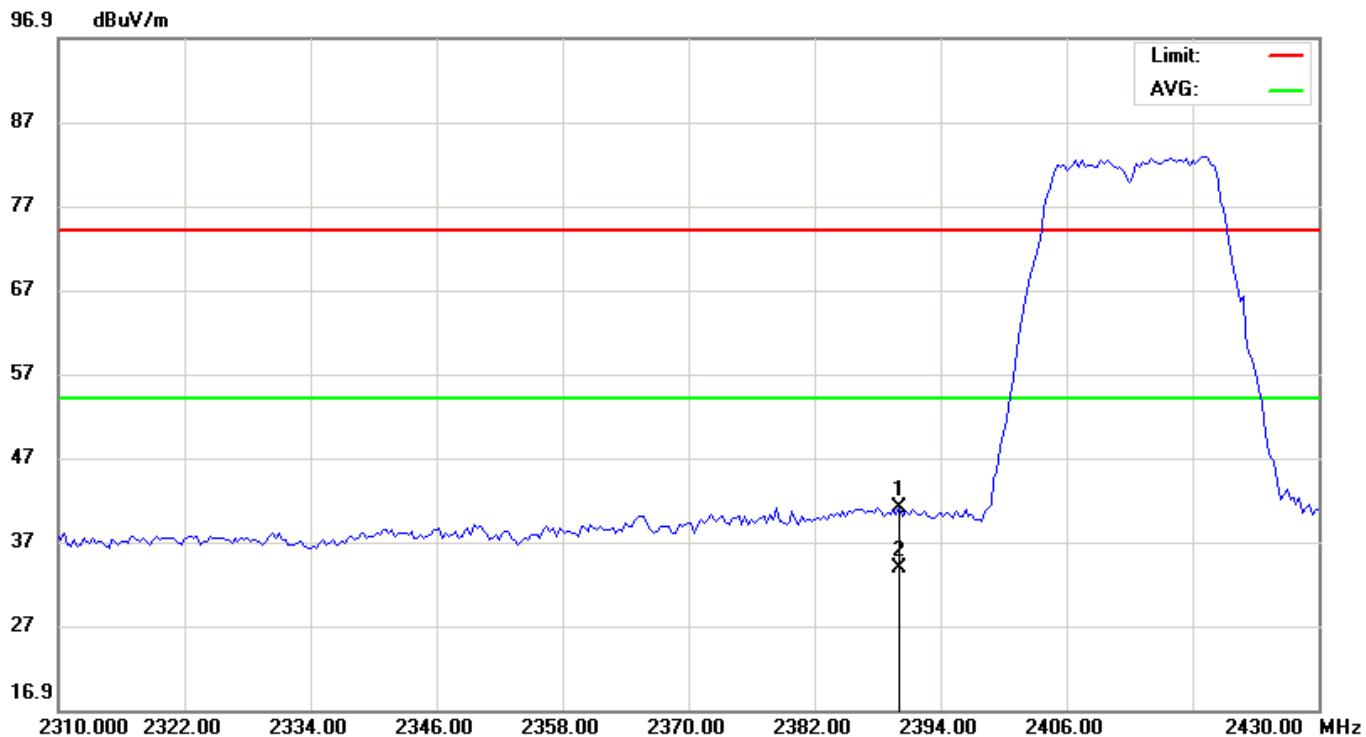

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree degree	Comment
1		2390.000	49.49	-8.43	41.06	74.00	-32.94	peak			
2	*	2390.000	42.22	-8.43	33.79	54.00	-20.21	AVG			

*:Maximum data x:Over limit !:over margin


EUT:	TND Tablet	M/N:	TNDT80B
Mode:	802.11 n(20M)-CH11	Phase:	Vertical
Test by:	John	Power:	DC 3.7V by Battery
Temperature: / Humidity	23.7°C / 51.6%	Test date:	2016-07-13

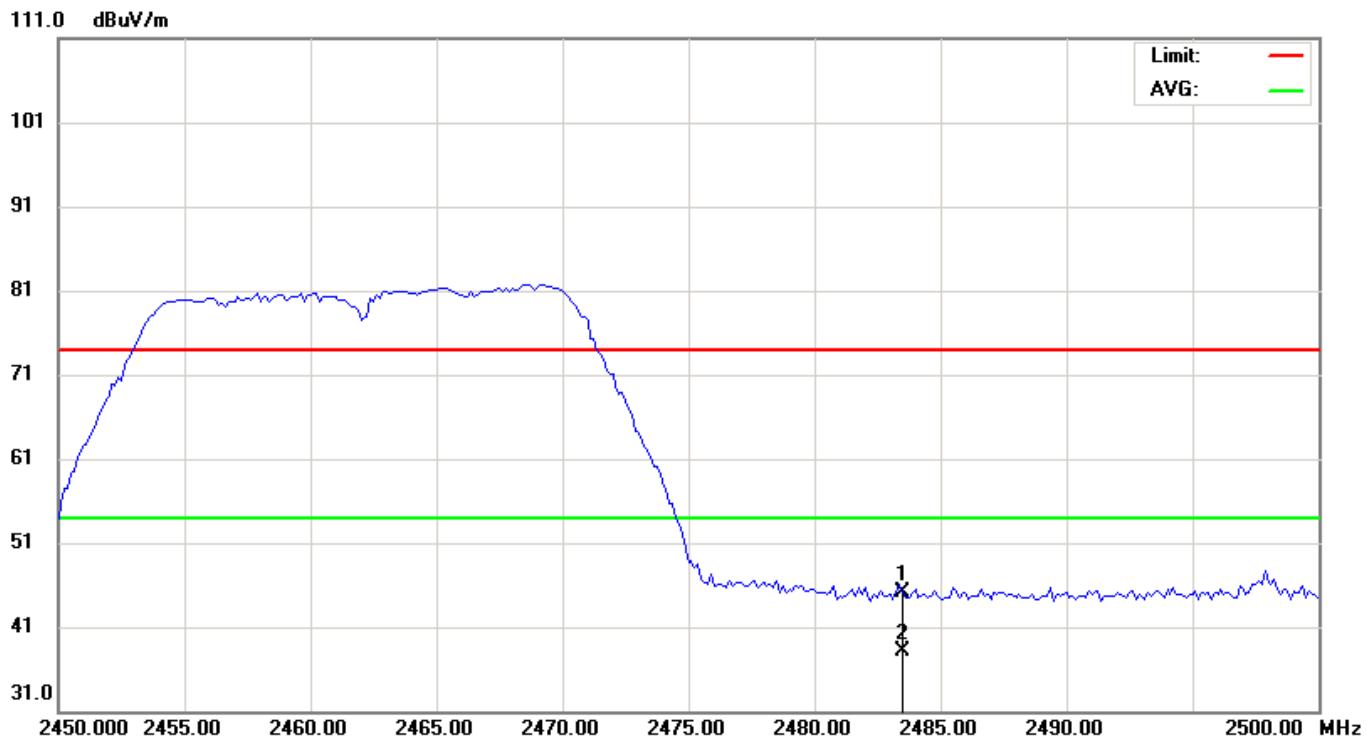

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree degree	Comment
1		2483.500	53.42	-8.29	45.13	74.00	-28.87	peak			
2	*	2483.500	46.41	-8.29	38.12	54.00	-15.88	AVG			

*:Maximum data x:Over limit !:over margin


EUT:	TND Tablet	M/N:	TNDT80B
Mode:	802.11 n(20M)-CH11	Phase:	Horizontal
Test by:	John	Power:	DC 3.7V by Battery
Temperature: / Humidity	23.7°C / 51.6%	Test date:	2016-07-13

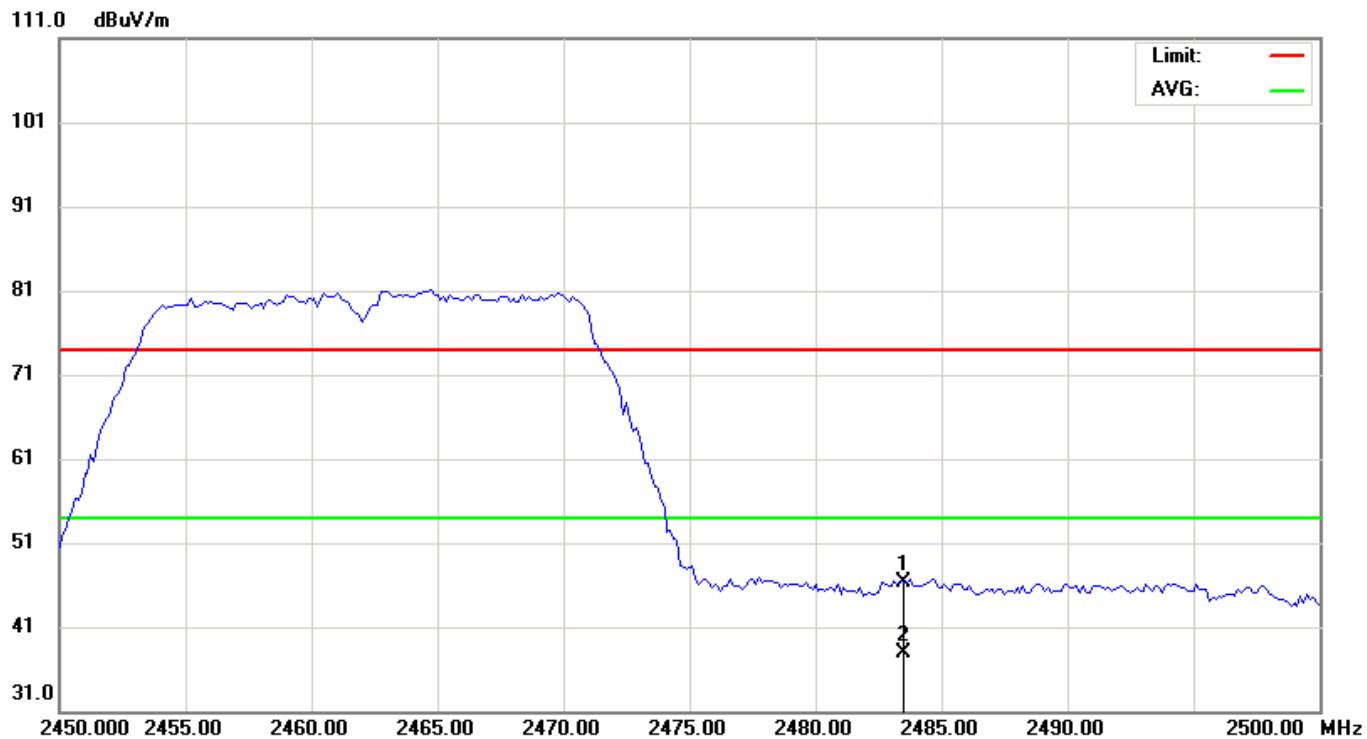

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree degree	Comment
1		2483.500	54.54	-8.29	46.25	74.00	-27.75	peak			
2	*	2483.500	46.22	-8.29	37.93	54.00	-16.07	AVG			

*:Maximum data x:Over limit !:over margin


EUT:	TND Tablet	M/N:	TNDT80B
Mode:	802.11 n(40M)-CH3	Phase:	Vertical
Test by:	John	Power:	DC 3.7V by Battery
Temperature: / Humidity	23.7°C / 51.6%	Test date:	2016-07-13

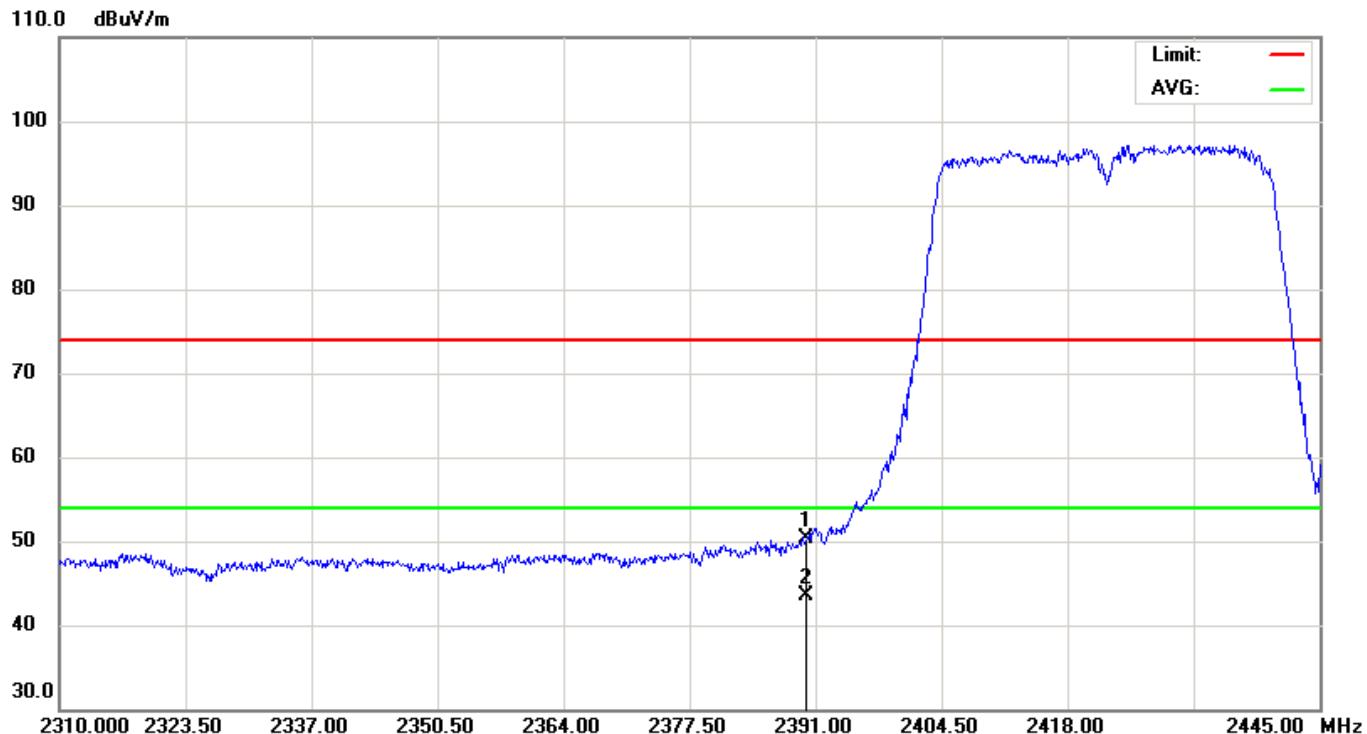

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		2390.000	39.84	10.36	50.20	74.00	-23.80	peak			
2	*	2390.000	33.10	10.36	43.46	54.00	-10.54	AVG			

*:Maximum data x:Over limit l:over margin


EUT:	TND Tablet	M/N:	TNDT80B
Mode:	802.11 n(40M)-CH3	Phase:	Horizontal
Test by:	John	Power:	DC 3.7V by Battery
Temperature: / Humidity	23.7°C / 51.6%	Test date:	2016-07-13

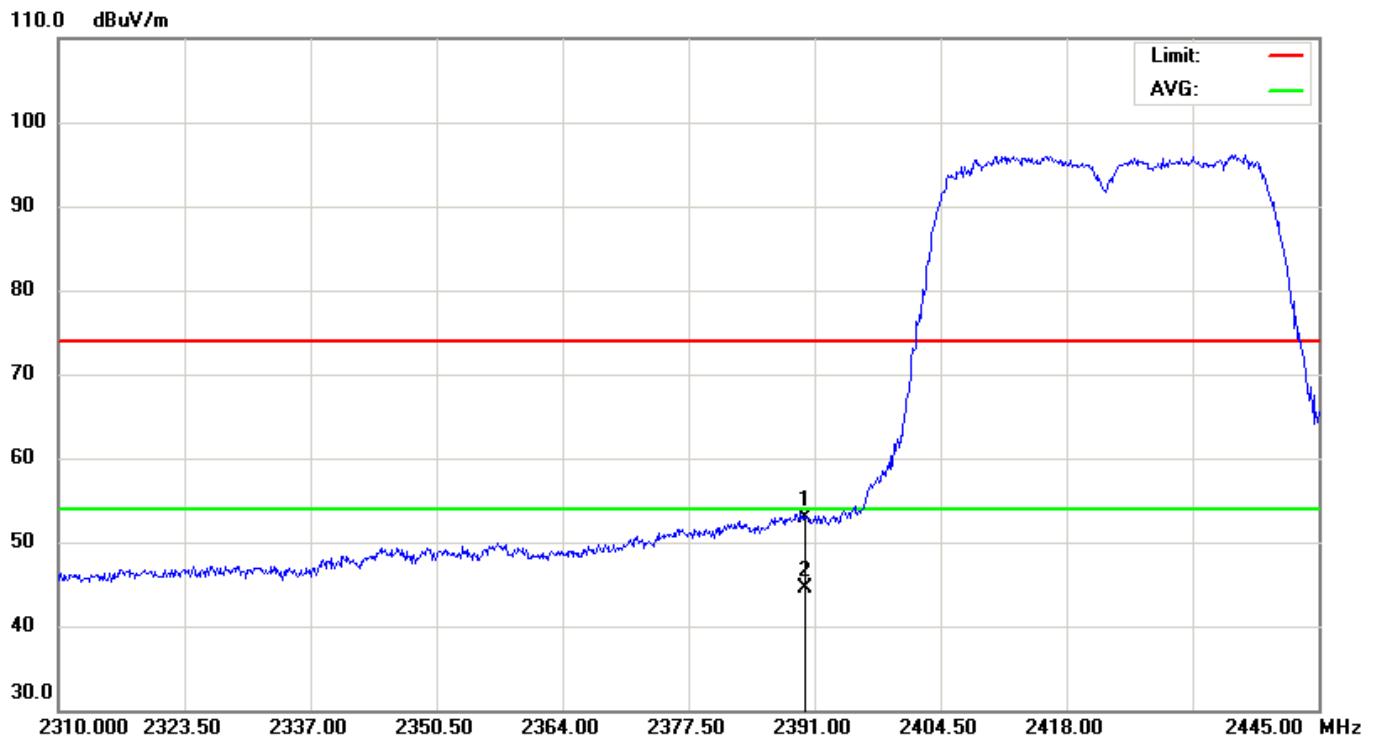

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		2390.000	42.46	10.36	52.82	74.00	-21.18	peak		
2	*	2390.000	34.19	10.36	44.55	54.00	-9.45	AVG		

*:Maximum data x:Over limit !:over margin


EUT:	TND Tablet	M/N:	TNDT80B
Mode:	802.11 n(40M)-CH9	Phase:	Vertical
Test by:	John	Power:	DC 3.7V by Battery
Temperature: / Humidity	23.7°C / 51.6%	Test date:	2016-07-13

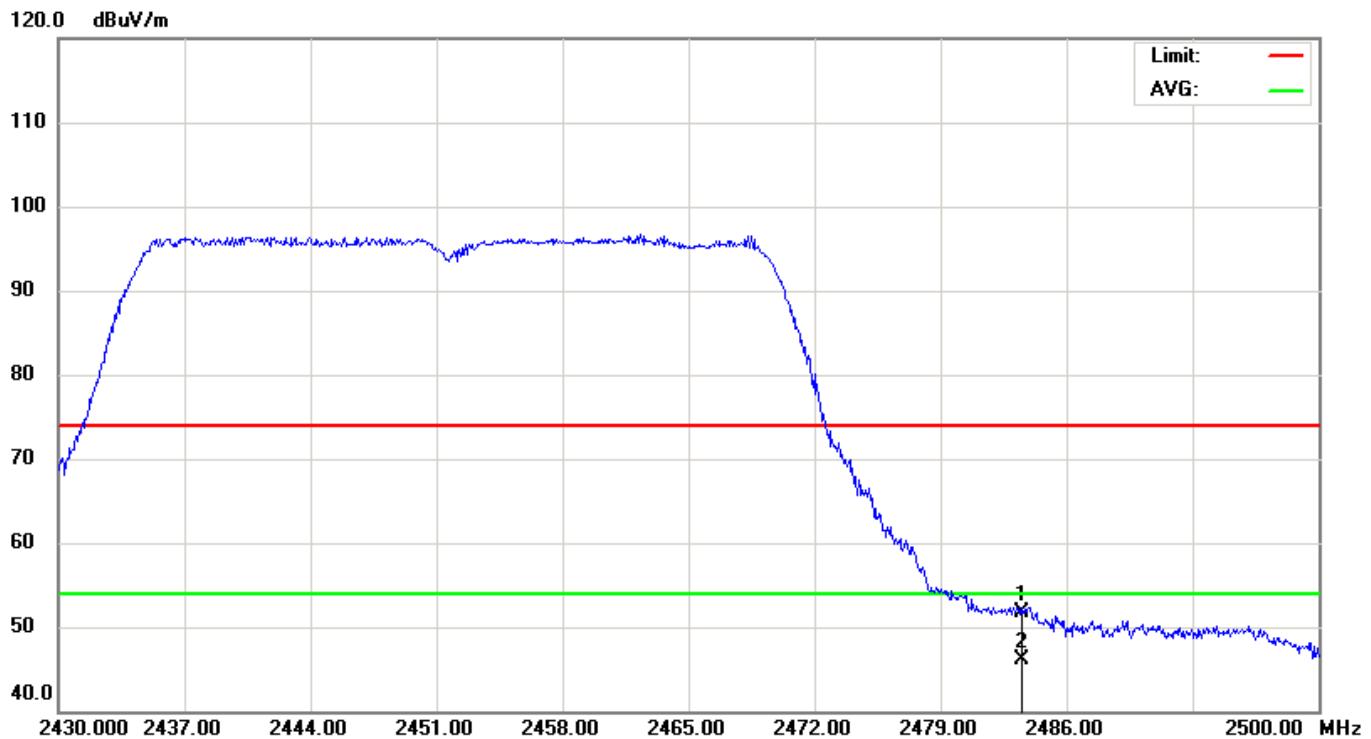

No.	Mk.	Freq. MHz	Reading	Correct	Measure-	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree
			Level dBuV	Factor dB	ment dBuV/m				
1		2483.500	40.94	10.73	51.67	74.00	-22.33	peak	
2	*	2483.500	35.44	10.73	46.17	54.00	-7.83	AVG	

*:Maximum data x:Over limit !:over margin

EUT:	TND Tablet	M/N:	TNDT80B
Mode:	802.11 n(40M)-CH9	Phase:	Horizontal
Test by:	John	Power:	DC 3.7V by Battery
Temperature: / Humidity	23.7°C / 51.6%	Test date:	2016-07-13

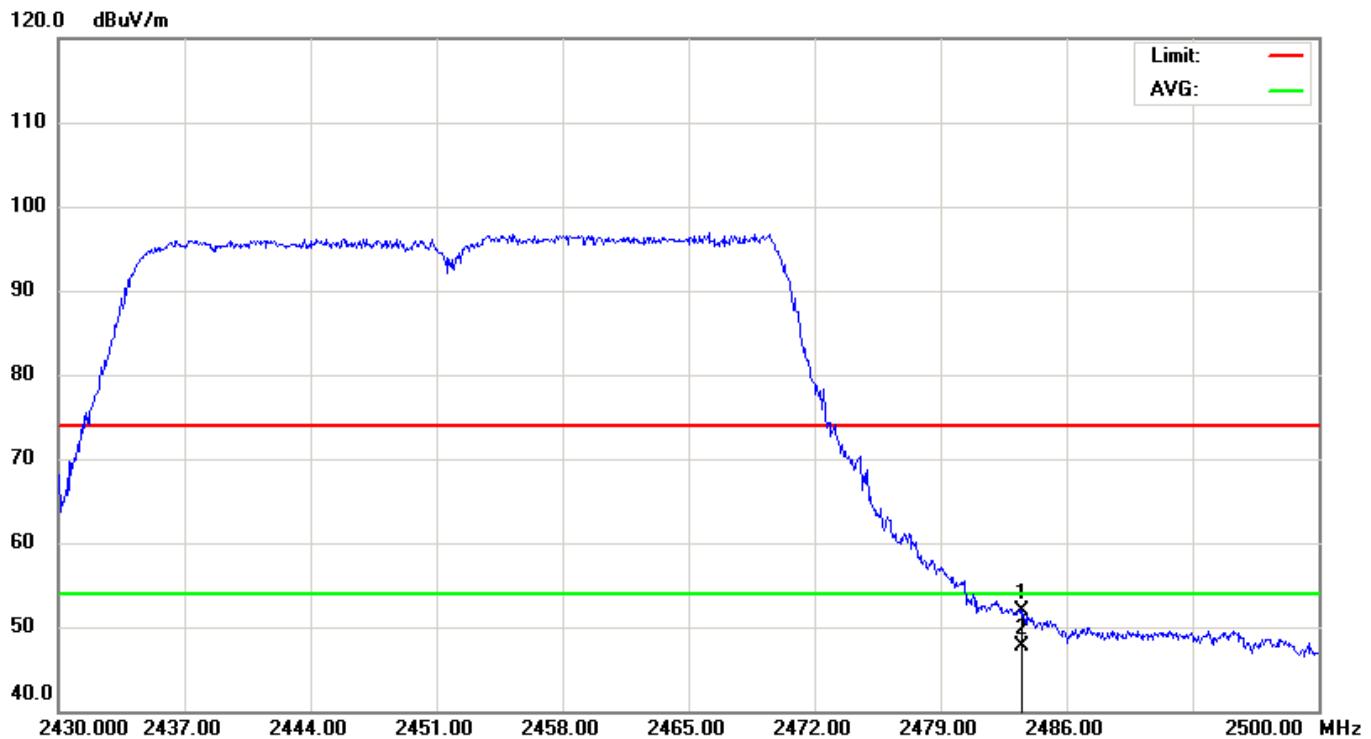

No.	Mk.	Freq. MHz	Reading Level	Correct Factor	Measure- ment	Limit	Over	Antenna Height	Table Degree	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	
1		2483.500	41.15	10.73	51.88	74.00	-22.12	peak		
2	*	2483.500	36.98	10.73	47.71	54.00	-6.29	AVG		

*:Maximum data x:Over limit !:over margin

End of the report