

TEST REPORT

Reference No...... : WTX24X07153290W001
FCC ID..... : A4E-PG12
Applicant..... : eMoMo Technology Co., Ltd
Address..... : 4th, Floor, Yong He Building, Tai Wan Industrial Park, Shi Yan Town, Bao' an District, Shen Zhen, 518108, Guangdong, China
Manufacturer..... : The same as Applicant
Address..... : The same as Applicant
Product Name..... : Mod3 speaker
Model No...... : PG12
Standards..... : FCC Part 15.247
Date of Receipt sample..... : 2024-07-01
Date of Test..... : 2024-07-01 to 2024-07-12
Date of Issue..... : 2024-07-12
Test Report Form No...... : WTX_Part 15_247W
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of approver.


Prepared By:

Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,
Block 70 Bao'an District, Shenzhen, Guangdong, China


Tel.: +86-755-33663308 Fax.: +86-755-33663309 Email: sem@waltek.com.cn

Tested by:



Mike Shi

Approved by:



Jason Su

TABLE OF CONTENTS

1. GENERAL INFORMATION5

1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)5

1.2 TEST STANDARDS6

1.3 TEST METHODOLOGY6

1.4 TEST FACILITY6

1.5 EUT SETUP AND TEST MODE7

1.6 MEASUREMENT UNCERTAINTY9

1.7 TEST EQUIPMENT LIST AND DETAILS10

2. SUMMARY OF TEST RESULTS13

3. ANTENNA REQUIREMENT14

3.1 STANDARD APPLICABLE14

3.2 EVALUATION INFORMATION14

4. FREQUENCY HOPPING SYSTEM REQUIREMENTS15

4.1 STANDARD APPLICABLE15

4.2 FREQUENCY HOPPING SYSTEM15

4.3 EUT PSEUDORANDOM FREQUENCY HOPPING SEQUENCE16

5. QUANTITY OF HOPPING CHANNELS AND CHANNEL SEPARATION17

5.1 STANDARD APPLICABLE17

5.2 TEST SETUP BLOCK DIAGRAM17

5.3 TEST PROCEDURE17

5.4 SUMMARY OF TEST RESULTS/PLOTS18

6. DWELL TIME OF HOPPING CHANNEL19

6.1 STANDARD APPLICABLE19

6.2 TEST SETUP BLOCK DIAGRAM19

6.3 TEST PROCEDURE19

6.4 SUMMARY OF TEST RESULTS/PLOTS20

7. 20DB BANDWIDTH21

7.1 STANDARD APPLICABLE21

7.2 TEST SETUP BLOCK DIAGRAM21

7.3 TEST PROCEDURE21

7.4 SUMMARY OF TEST RESULTS/PLOTS22

8. RF OUTPUT POWER23

8.1 STANDARD APPLICABLE23

8.2 TEST SETUP BLOCK DIAGRAM23

8.3 TEST PROCEDURE23

8.4 SUMMARY OF TEST RESULTS/PLOTS23

9. FIELD STRENGTH OF SPURIOUS EMISSIONS24

9.1 STANDARD APPLICABLE24

9.2 TEST PROCEDURE24

9.3 CORRECTED AMPLITUDE & MARGIN CALCULATION26

9.4 SUMMARY OF TEST RESULTS/PLOTS26

10. OUT OF BAND EMISSIONS30

10.1 STANDARD APPLICABLE30

10.2 TEST PROCEDURE30

10.3 SUMMARY OF TEST RESULTS/PLOTS31

11. CONDUCTED EMISSIONS34

11.1 TEST PROCEDURE34

11.2 BASIC TEST SETUP BLOCK DIAGRAM34

11.3 TEST RECEIVER SETUP34

11.4 SUMMARY OF TEST RESULTS/PLOTS34

APPENDIX SUMMARY	37
APPENDIX A	38
APPENDIX B	43
APPENDIX C	47
APPENDIX D	51
APPENDIX E	55
APPENDIX PHOTOGRAPHS	64

Report version

Version No.	Date of issue	Description
Rev.00	2024-07-12	Original
/	/	/

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

General Description of EUT	
Product Name:	Mod3 speaker
Trade Name	eMoMo
Model No.:	PG12
Adding Model(s):	/
Rated Voltage:	Battery:DC7.4V
Battery Capacity:	2200mAh
Adapter Model:	MODEL:R122-0502000UD INPUT:100-240V~ 50/60Hz 0.6A OUTPUT:DC5V,2000mA
<i>Note: The test data is gathered from a production sample, provided by the manufacturer.</i>	

Technical Characteristics of EUT	
Bluetooth Version:	V5.0 (BR/EDR mode)
Frequency Range:	2402-2480MHz
RF Output Power:	5.268dBm (Conducted)
Data Rate:	1Mbps, 2Mbps, 3Mbps
Modulation:	GFSK, $\pi/4$ DQPSK, 8DPSK
Quantity of Channels:	79
Channel Separation:	1MHz
Type of Antenna:	PCB Antenna
Antenna Gain:	3.38dBi
<i>Note The Antenna Gain is provided by the customer and can affect the validity of results.</i>	

1.2 Test Standards

The tests were performed according to following standards:

FCC Rules Part 15.247: Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz.

558074 D01 15.247 Meas Guidance v05r02: Guidance for Compliance Measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid System Devices Operating under section 15.247 of the FCC rules.

ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, the equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

1.4 Test Facility

Address of the test laboratory

Laboratory: Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road, Block 70 Bao'an District, Shenzhen, Guangdong, China

FCC – Registration No.: 125990

Waltek Testing Group (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010, and Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Waltek Testing Group (Shenzhen) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A and the CAB identifier is CN0057.

1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	Low Channel	2402MHz
TM2	Middle Channel	2441MHz
TM3	High Channel	2480MHz
TM4	Hopping	2402-2480MHz

Modulation Configure			
Modulation	Packet	Packet Type	Packet Size
GFSK	DH1	4	27
	DH3	11	183
	DH5	15	339
$\pi/4$ DQPSK	2DH1	20	54
	2DH3	26	367
	2DH5	30	679
8DPSK	3DH1	24	83
	3DH3	27	552
	3DH5	31	1021

Normal mode: the Bluetooth has been tested on the modulation of GFSK, $\pi/4$ DQPSK and 8DPSK, compliance test and record the worst case.

Test Conditions	
Temperature:	22~25 °C
Relative Humidity:	45~55 %
ATM Pressure:	1019 mbar

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
DC Cable	1.8	Unshielded	Without Ferrite
Type-C Cable	1.0	Unshielded	Without Ferrite

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
Adapter	/	XY18W-1375-QC3.0	/

1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	$\pm 0.42\text{dB}$
Occupied Bandwidth	Conducted	$\pm 1.5\%$
Conducted Spurious Emission	Conducted	$\pm 2.17\text{dB}$
Conducted Emissions	Conducted	9-150kHz $\pm 3.74\text{dB}$
		0.15-30MHz $\pm 3.34\text{dB}$
Transmitter Spurious Emissions	Radiated	30-200MHz $\pm 4.52\text{dB}$
		0.2-1GHz $\pm 5.56\text{dB}$
		1-6GHz $\pm 3.84\text{dB}$
		6-26GHz $\pm 3.92\text{dB}$

1.7 Test Equipment List and Details

Fixed asset Number	Description	Manufacturer	Model	Serial No.	Cal Date	Due. Date
WTXE1041A 1001	Communication Tester	Rohde & Schwarz	CMW500	148650	2024-02-24	2025-02-23
WTXE1005A 1005	Spectrum Analyzer	Agilent	N9020A	US471401 02	2024-03-19	2025-03-18
WTXE1084A 1001	Spectrum Analyzer	Agilent	N9020A	MY543205 48	2024-02-24	2025-02-23
WTXE1004A 1-001	Spectrum Analyzer	Rohde & Schwarz	FSP40	100612	2024-02-27	2025-02-26
<input type="checkbox"/> Chamber A: Below 1GHz						
WTXE1005A 1003	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/03 5	2024-02-24	2025-02-23
WTXE1001A 1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2024-03-19	2025-03-18
WTXE1007A 1001	Amplifier	HP	8447F	2805A034 75	2024-02-24	2025-02-23
WTXE1010A 1007	Loop Antenna	Schwarz beck	FMZB 1516	9773	2024-02-26	2025-02-25
WTXE1010A 1006	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2024-02-24	2025-02-23
<input type="checkbox"/> Chamber A: Above 1GHz						
WTXE1005A 1003	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/03 5	2024-02-24	2025-02-23
WTXE1001A 1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2024-03-19	2025-03-18
WTXE1065A 1001	Amplifier	C&D	PAP-1G18	2002	2024-02-27	2025-02-26
WTXE1010A 1005	Horn Antenna	ETS	3117	00086197	2024-02-26	2025-02-25
WTXE1010A 1010	DRG Horn Antenna	A.H. SYSTEMS	SAS-574	571	2024-03-17	2025-03-16
WTXE1003A 1001	Pre-amplifier	Schwarzbeck	BBV 9721	9721-031	2024-02-29	2025-02-28
<input type="checkbox"/> Chamber B:Below 1GHz						
WTXE1010A 1006	Trilog Broadband Antenna	Schwarz beck	VULB9163(B)	9163-635	2024-03-17	2027-03-16
WTXE1038A 1001	Amplifier	Agilent	8447D	2944A104 57	2024-02-24	2025-02-23

WTXE1001A 1002	EMI Test Receiver	Rohde & Schwarz	ESPI	101391	2024-02-24	2025-02-23
<input checked="" type="checkbox"/> Chamber C: Below 1GHz						
WTXE1093A 1001	EMI Test Receiver	Rohde & Schwarz	ESIB 26	100401	2024-02-27	2025-02-26
WTXE1010A 1013-1	Trilog Broadband Antenna	Schwarz beck	VULB 9168	1194	2024-04-18	2027-04-17
WTXE1010A 1007	Loop Antenna	Schwarz beck	FMZB 1516	9773	2024-02-26	2025-02-25
WTXE1007A 1002	Amplifier	HP	8447F	2944A038 69	2024-02-24	2025-02-23
<input checked="" type="checkbox"/> Chamber C: Above 1GHz						
WTXE1093A 1001	EMI Test Receiver	Rohde & Schwarz	ESIB 26	100401	2024-02-27	2025-02-26
WTXE1103A 1005	Horn Antenna	POAM	RTF-118A	1820	2023-03-10	2026-03-09
WTXE1103A 1006	Amplifier	Tonscend	TAP01018050	AP22E806 235	2024-02-27	2025-02-26
WTXE1010A 1010	DRG Horn Antenna	A.H. SYSTEMS	SAS-574	571	2024-03-17	2025-03-16
WTXE1003A 1001	Pre-amplifier	Schwarzbeck	BBV 9721	9721-031	2024-02-29	2025-02-28
<input type="checkbox"/> Conducted Room 1#						
WTXE1104A 1029	EMI Test Receiver	Rohde & Schwarz	ESCI	100525	2023-12-12	2024-12-11
WTXE1002A 1001	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2024-02-24	2025-02-23
WTXE1003A 1001	AC LISN	Schwarz beck	NSLK8126	8126-279	2024-02-24	2025-02-23
<input checked="" type="checkbox"/> Conducted Room 2#						
WTXE1001A 1004	EMI Test Receiver	Rohde & Schwarz	ESPI	101259	2024-02-24	2025-02-23
WTXE1003A 1003	LISN	Rohde & Schwarz	ENV 216	100097	2024-02-24	2025-02-23

Software List			
Description	Manufacturer	Model	Version
EMI Test Software (Radiated Emission)*	Farad	EZ-EMC	RA-03A1
EMI Test Software (Conducted Emission Room 1#)*	Farad	EZ-EMC	RA-03A1
EMI Test Software (Conducted Emission Room 2#)*	SKET	EMC-I	V2.0

*Remark: indicates software version used in the compliance certification testing.

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§15.203; §15.247(b)(4)(i)	Antenna Requirement	Compliant
§15.205	Restricted Band of Operation	Compliant
§15.207(a)	Conducted Emission	Compliant
§15.209(a)	Radiated Spurious Emissions	Compliant
§15.247(a)(1)(iii)	Quantity of Hopping Channel	Compliant
§15.247(a)(1)	Channel Separation	Compliant
§15.247(a)(1)(iii)	Time of Occupancy (Dwell time)	Compliant
§15.247(a)	20dB Bandwidth	Compliant
§15.247(b)(1)	RF Power Output	Compliant
§15.247(d)	Band Edge (Out of Band Emissions)	Compliant
§15.247(a)(1)	Frequency Hopping Sequence	Compliant
§15.247(g), (h)	Frequency Hopping System	Compliant

N/A: Not applicable.

3. Antenna Requirement

3.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.2 Evaluation Information

This product has a PCB antenna, fulfill the requirement of this section.

4. Frequency Hopping System Requirements

4.1 Standard Applicable

According to FCC Part 15.247(a)(1), the system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

(g) Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. However, the system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this section should the transmitter be presented with a continuous data (or information) stream. In addition, a system employing short transmission bursts must comply with the definition of a frequency hopping system and must distribute its transmissions over the minimum number of hopping channels specified in this section.

(h) The incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hopsets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

4.2 Frequency Hopping System

This transmitter device is frequency hopping device, and complies with FCC part 15.247 rule.

This device uses Bluetooth radio which operates in 2400-2483.5MHz band. Bluetooth uses a radio technology called frequency-hopping spread spectrum, which chops up the data being sent and transmits chunks of it on up to 79 bands (1MHz each; centred from 2402 to 2480MHz) in the range 2,400-2,483.5MHz. The transmitter switches hop frequencies 1,600 times per second to assure a high degree of data security. All Bluetooth devices participating in a given piconet are synchronized to the frequency-hopping channel for the piconet. The frequency hopping sequence is determined by the master's device address and the phase of the hopping sequence (the frequency to hop at a specific time) is determined by the master's internal clock. Therefore, all slaves in a piconet must know the master's device address and must synchronize their clocks with the master's clock.

Adaptive Frequency Hopping (AFH) was introduced in the Bluetooth specification to provide an effective way for a Bluetooth radio to counteract normal interference. AFH identifies "bad" channels, where either other wireless devices are interfering with the Bluetooth signal or the Bluetooth signal is interfering with another device. The AFH-enabled Bluetooth device will then communicate with other devices within its piconet to share details of any identified bad channels. The devices will then switch to alternative available "good"

Reference No.: WTX24X07153290W001

channels, away from the areas of interference, thus having no impact on the bandwidth used. This device was tested with a Bluetooth system receiver to check that the device maintained hopping synchronization, and the device complied with these requirements for 558074 D01 15.247 Meas Guidance v05r02 and FCC Part 15.247 rule.

4.3 EUT Pseudorandom Frequency Hopping Sequence

Pseudorandom Frequency Hopping Sequence Table as below:

Channel: 08, 24, 40, 56, 40, 56, 72, 09, 01, 09, 33, 41, 33, 41, 65, 73, 53, 69, 06, 22, 04, 20, 36, 52, 38, 46, 70, 78, 68, 76, 21, 29, 10, 26, 42, 58, 44, 60, 76, 13, 03, 11, 35, 43, 37, 45, 69, 77, 55, 71, 08, 24, 08, 24, 40, 56, 40, 48, 72, 01, 72, 01, 25, 33, 12, 28, 44, 60, 42, 58, 74, 11, 05, 13, 37, 45 etc.


The system receiver have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

5. Quantity of Hopping Channels and Channel Separation

5.1 Standard Applicable

According to FCC 15.247(a)(1), frequency hopping systems operating in the 2400-2483.5MHz band may have hopping channel carrier frequencies that are separated by 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, and frequency hopping systems in the 2400-2483.5MHz band shall use at least 15 channels.

5.2 Test Setup Block Diagram

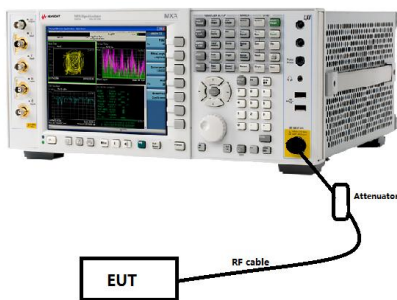

5.3 Test Procedure

According to KDB 558074 D01 v05r02 Sub clause 9 and ANSI C63.10-2013 section 7.8.3, the number of hopping frequencies test method as follows.

- Span: The frequency band of operation. Depending on the number of channels the device supports, it may be necessary to divide the frequency range of operation across multiple spans, to allow the individual channels to be clearly seen.
- RBW: To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
- VBW \geq RBW.
- Sweep: Auto.
- Detector function: Peak.
- Trace: Max hold.
- Allow the trace to stabilize.

According to DA 00-705 Section 15.247(a), the EUT shall have its hopping function enabled, the Carrier frequency separation test method as follows:

Span = wide enough to capture the peaks of two adjacent channels

Resolution (or IF) Bandwidth (RBW) \geq 1% of the span

Video (or Average) Bandwidth (VBW) \geq RBW

Sweep = auto

Detector function = peak

Waltek Testing Group (Shenzhen) Co., Ltd.

[Http://www.waltek.com.cn](http://www.waltek.com.cn)

Reference No.: WTX24X07153290W001

Trace = max hold

Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section. Submit this plot.

5.4 Summary of Test Results/Plots


Please refer to Appendix A

6. Dwell Time of Hopping Channel

6.1 Standard Applicable

According to 15.247(a)(1)(iii), frequency hopping systems in the 2400–2483.5MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

6.2 Test Setup Block Diagram

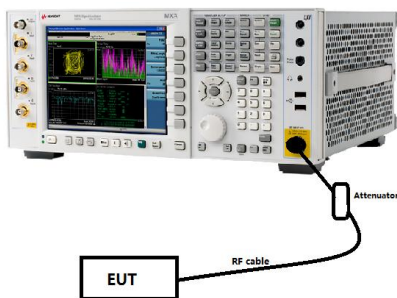

6.3 Test Procedure

According to KDB 558074 D01 v05r02 Sub clause 9 and ANSI C63.10-2013 section 7.8.4, the dwell time of a hopping channel test method as follows.

- a) Span: Zero span, centered on a hopping channel.
- b) RBW shall be \leq channel spacing and where possible RBW should be set $\gg 1 / T$, where T is the expected dwell time per channel.
- c) Sweep: As necessary to capture the entire dwell time per hopping channel; where possible use a video trigger and trigger delay so that the transmitted signal starts a little to the right of the start of the plot. The trigger level might need slight adjustment to prevent triggering when the system hops on an adjacent channel; a second plot might be needed with a longer sweep time to show two successive hops on a channel.
- d) Detector function: Peak.
- e) Trace: Max hold.

Use the marker-delta function to determine the transmit time per hop. If this value varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test for each variation in transmit time.

Repeat the measurement using a longer sweep time to determine the number of hops over the period specified in the requirements. The sweep time shall be equal to, or less than, the period specified in the requirements. Determine the number of hops over the sweep time and calculate the total number of hops in the period specified in the requirements, using the following equation:

(Number of hops in the period specified in the requirements) = (number of hops on spectrum analyzer) \times (period specified in the requirements / analyzer sweep time)

Reference No.: WTX24X07153290W001

The average time of occupancy is calculated from the transmit time per hop multiplied by the number of hops in the period specified in the requirements. If the number of hops in a specific time varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test for each variation.

The measured transmit time and time between hops shall be consistent with the values described in the operational description for the EUT.

6.4 Summary of Test Results/Plots

The dwell time within a period in data mode is independent from the packet type (packet length).

The test period: $T = 0.4 \text{ Second} * 79 \text{ Channel} = 31.6 \text{ s}$

Dwell time = time slot length * (Hopping rate / Number of hopping channels) * Period


Please refer to Appendix B

7. 20dB Bandwidth

7.1 Standard Applicable

According to 15.247(a) and 15.215(c), 20dB bandwidth is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

7.2 Test Setup Block Diagram

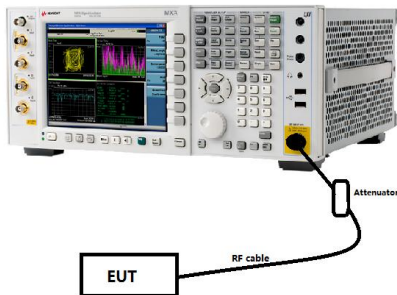

7.3 Test Procedure

According to KDB 558074 D01 v05r02 Sub clause 9 and ANSI C63.10-2013 section 6.9.2, the 20dB bandwidth test method as follows.

- a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the EMI receiver or spectrum analyzer shall be between two times and five times the OBW.
- b) The nominal IF filter bandwidth (3dB RBW) shall be in the range of 1% to 5% of the OBW and video bandwidth (VBW) shall be approximately three times RBW, unless otherwise specified by the applicable requirement.
- c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (\text{OBW}/\text{RBW})]$ below the reference level.
- d) Steps a) through c) might require iteration to adjust within the specified tolerances.
- e) The dynamic range of the instrument at the selected RBW shall be more than 10 dB below the target “-xx dB down” requirement; that is, if the requirement calls for measuring the -20 dB OBW, the instrument noise floor at the selected RBW shall be at least 30dB below the reference value.
- f) Set detection mode to peak and trace mode to max hold.
- g) Determine the reference value: Set the EUT to transmit an unmodulated carrier or modulated signal, as applicable. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace (this is the reference value).
- h) Determine the “-xx dB down amplitude” using $[(\text{reference value}) - \text{xx}]$. Alternatively, this calculation may be made by using the marker-delta function of the instrument.
- i) If the reference value is determined by an unmodulated carrier, then turn the EUT modulation ON, and either clear the existing trace or start a new trace on the spectrum analyzer and allow the new trace to

Reference No.: WTX24X07153290W001

stabilize. Otherwise, the trace from step g) shall be used for step j).

j) Place two markers, one at the lowest frequency and the other at the highest frequency of the envelope of the spectral display, such that each marker is at or slightly below the “-xx dB down amplitude” determined in step h). If a marker is below this “-xx dB down amplitude” value, then it shall be as close as possible to this value. The occupied bandwidth is the frequency difference between the two markers. Alternatively, set a marker at the lowest frequency of the envelope of the spectral display, such that the marker is at or slightly below the “-xx dB down amplitude” determined in step h). Reset the marker-delta function and move the marker to the other side of the emission until the delta marker amplitude is at the same level as the reference marker amplitude. The marker-delta frequency reading at this point is the specified emission bandwidth.

k) The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

7.4 Summary of Test Results/Plots


Please refer to Appendix C

8. RF Output Power

8.1 Standard Applicable

According to 15.247(b)(1), for frequency hopping systems operating in the 2400–2483.5MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5MHz band: 0.125 watts.

8.2 Test Setup Block Diagram

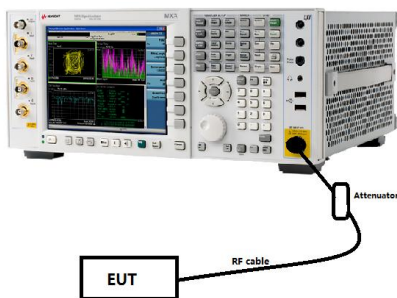

8.3 Test Procedure

According to KDB 558074 D01 v05r02 Subclause 9 and ANSI C63.10-2013 section 7.8.5, the output power test method as follows.

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

This is an RF-conducted test to evaluate maximum peak output power. Use a direct connection between the antenna port of the unlicensed wireless device and the spectrum analyzer, through suitable attenuation. The hopping shall be disabled for this test:

- a) Use the following spectrum analyzer settings:
 - 1) Span: Approximately five times the 20dB bandwidth, centered on a hopping channel.
 - 2) RBW > 20dB bandwidth of the emission being measured.
 - 3) VBW \geq RBW.
 - 4) Sweep: Auto.
 - 5) Detector function: Peak.
 - 6) Trace: Max hold.
- b) Allow trace to stabilize.
- c) Use the marker-to-peak function to set the marker to the peak of the emission.
- d) The indicated level is the peak output power, after any corrections for external attenuators and cables.
- e) A plot of the test results and setup description shall be included in the test report.

8.4 Summary of Test Results/Plots

Please refer to Appendix D

9. Field Strength of Spurious Emissions

9.1 Standard Applicable

According to §15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30dB instead of 20dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).


The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.

9.2 Test Procedure


The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.247(a) and FCC Part 15.209 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40cm long in the middle. The spacing between the peripherals was 10cm.


The test setup for emission measurement below 30MHz.

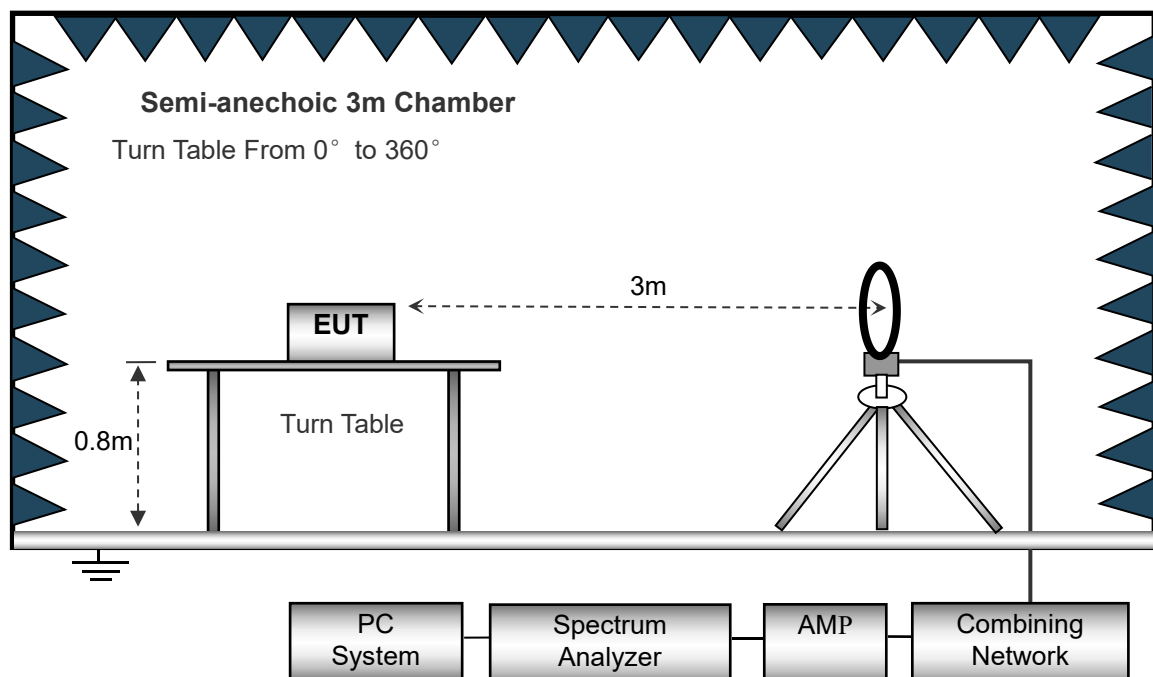

The test setup for emission measurement from 30MHz to 1GHz.

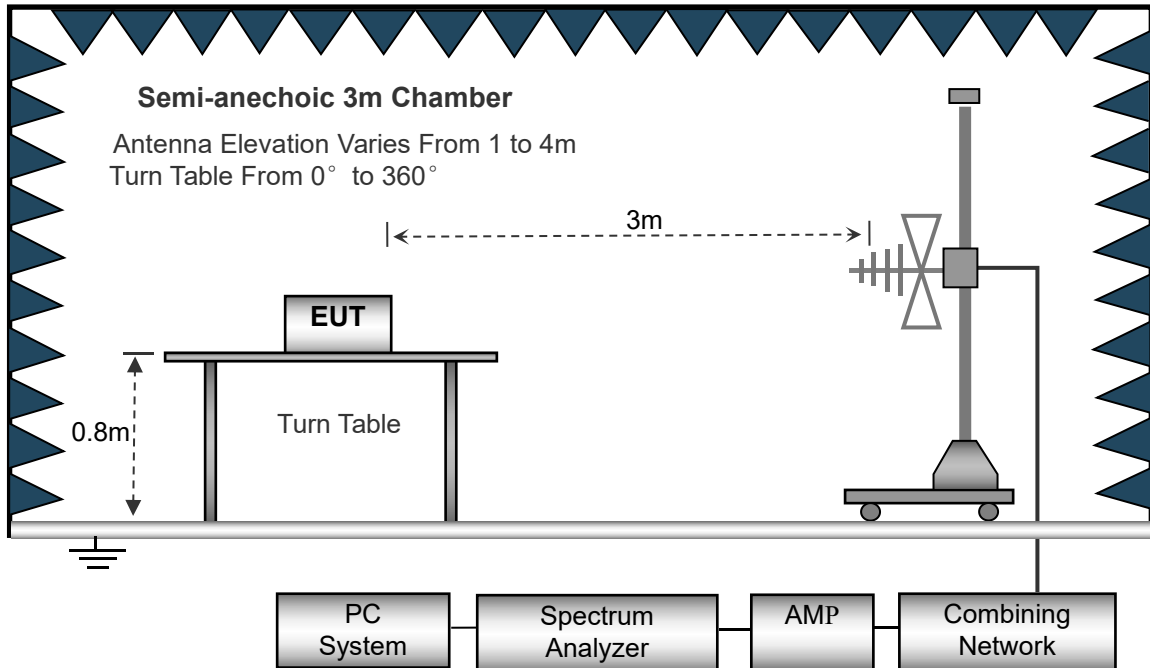

The test setup for emission measurement above 1GHz.

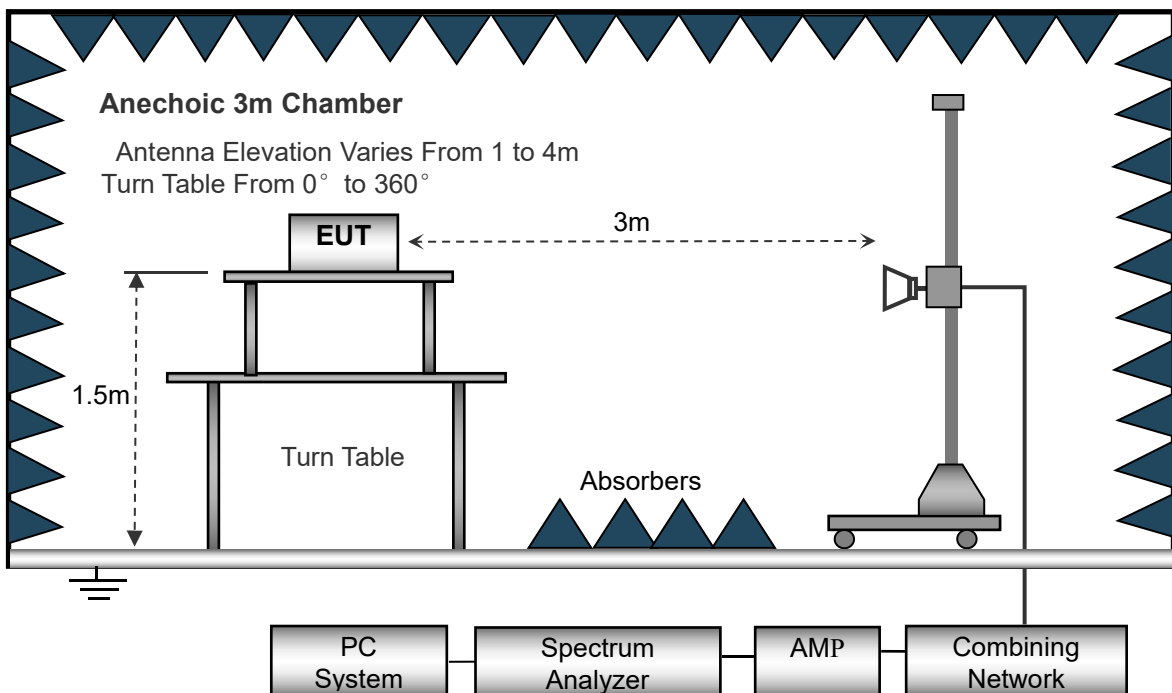

Frequency :9kHz-30MHz	Frequency :30MHz-1GHz	Frequency :Above 1GHz
RBW=10KHz,	RBW=120KHz,	RBW=1MHz,
VBW =30KHz	VBW=300KHz	VBW=3MHz(Peak), 10Hz(AV)
Sweep time= Auto	Sweep time= Auto	Sweep time= Auto
Trace = max hold	Trace = max hold	Trace = max hold
Detector function = peak	Detector function = peak, QP	Detector function = peak, AV

9.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\begin{aligned}\text{Corr. Ampl.} &= \text{Indicated Reading} + \text{Correct} \\ \text{Correct} &= \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}\end{aligned}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB μ V means the emission is 6dB μ V below the maximum limit. The equation for margin calculation is as follows:


$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$

9.4 Summary of Test Results/Plots

Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported. All test modes (different data rate and different modulation) are performed, but only the worst case (GFSK) is recorded in this report.


➤ Spurious Emissions Below 1GHz

Test Channel	Low(worst case)	Polarity:	Horizontal
--------------	-----------------	-----------	------------

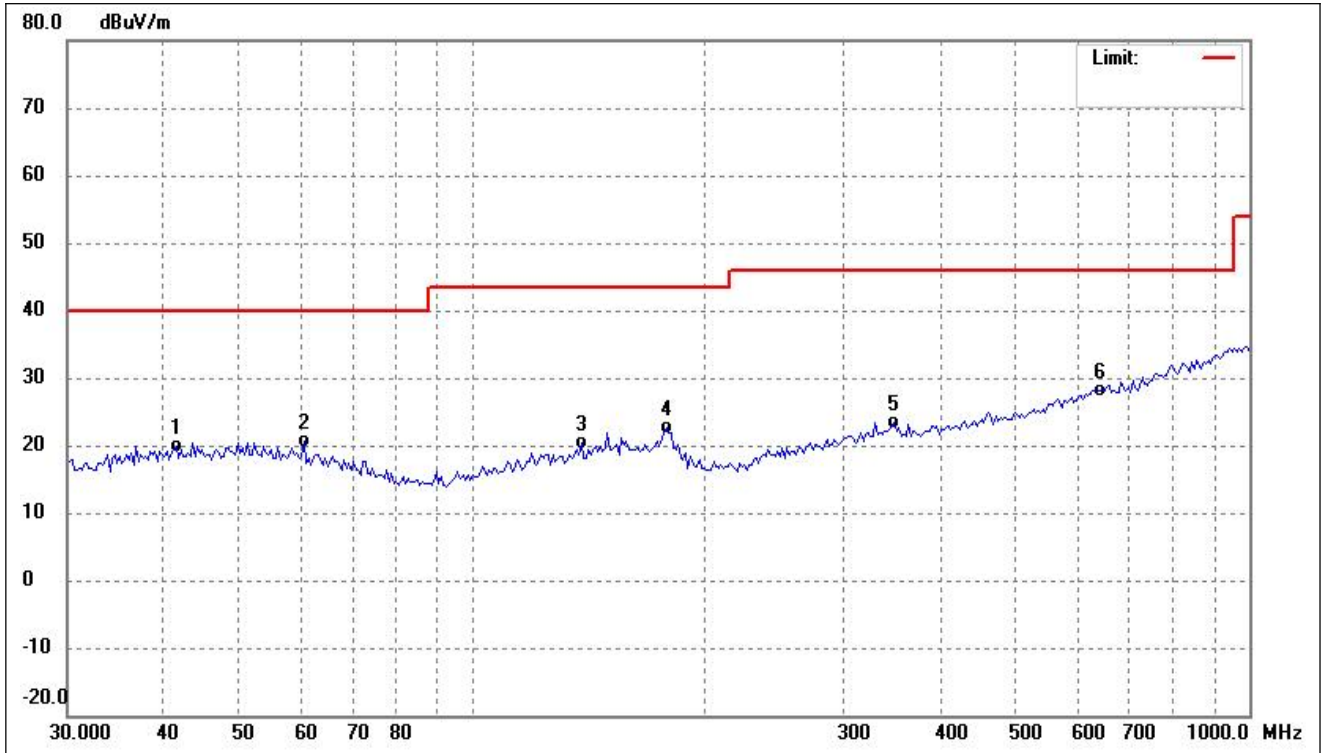

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	41.4483	27.93	-7.96	19.97	40.00	-20.03	-	-	peak
2	60.5769	29.20	-8.54	20.66	40.00	-19.34	-	-	peak
3	137.8400	29.35	-8.98	20.37	43.50	-23.13	-	-	peak
4	177.5179	32.13	-9.38	22.75	43.50	-20.75	-	-	peak
5	348.5145	30.41	-7.08	23.33	46.00	-22.67	-	-	peak
6	642.2923	29.75	-1.62	28.13	46.00	-17.87	-	-	peak

Test Channel	Low(worst case)	Polarity:	Vertical
--------------	-----------------	-----------	----------

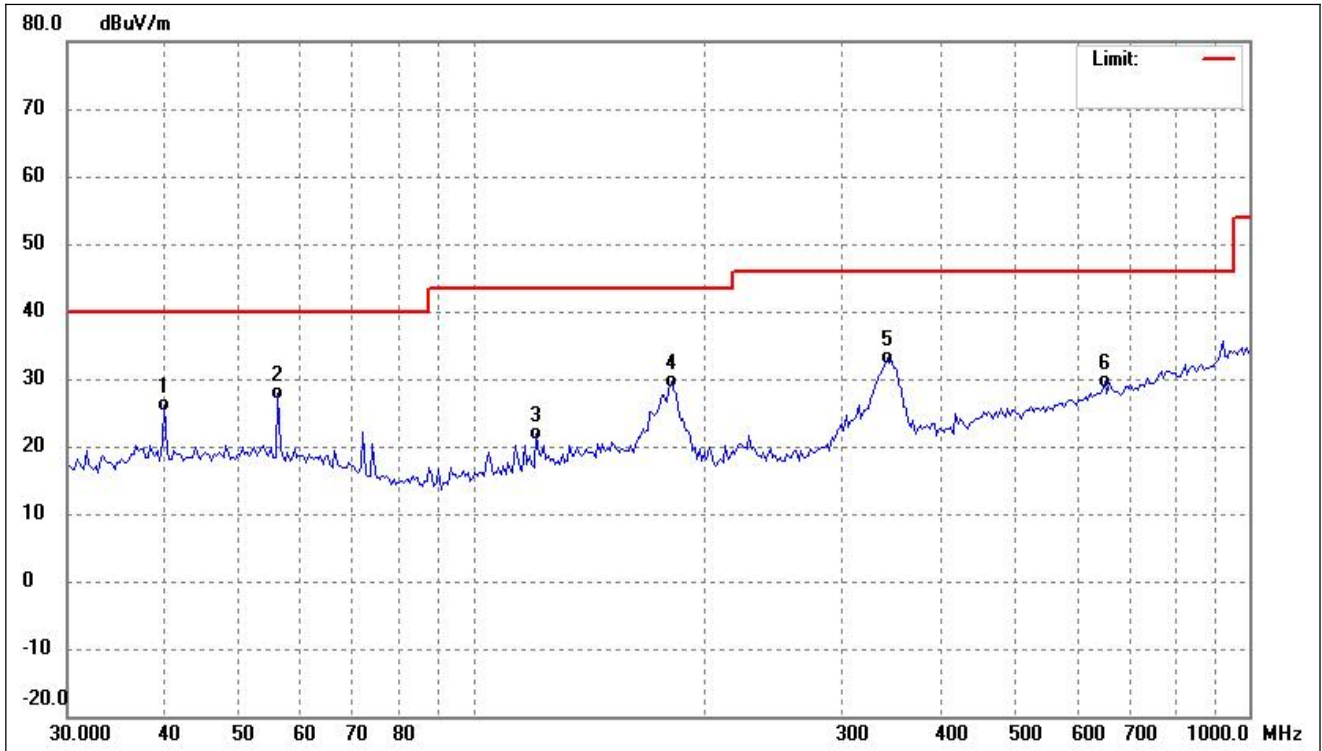

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	40.0173	34.08	-7.95	26.13	40.00	-13.87	-	-	peak
2	56.0708	36.08	-8.20	27.88	40.00	-12.12	-	-	peak
3	120.6118	31.93	-9.97	21.96	43.50	-21.54	-	-	peak
4	180.0304	39.35	-9.74	29.61	43.50	-13.89	-	-	peak
5	341.2442	40.38	-7.15	33.23	46.00	-12.77	-	-	peak
6	651.3831	31.10	-1.54	29.56	46.00	-16.44	-	-	peak

Remark: '-' Means' the test Degree and Height are not recorded by the test software and only show the worst case in the test report.

➤ Spurious Emissions Above 1GHz

Frequency (MHz)	Reading (dBuV/m)	Correct dB	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polar H/V	Detector
Low Channel-2402MHz							
4804	55.50	-3.59	51.91	74	-22.09	H	PK
4804	51.19	-3.59	47.60	54	-6.40	H	AV
7206	47.66	-0.52	47.14	74	-26.86	H	PK
7206	41.26	-0.52	40.74	54	-13.26	H	AV
4804	50.68	-3.59	47.09	74	-26.91	V	PK
4804	48.63	-3.59	45.04	54	-8.96	V	AV
7206	39.71	-0.52	39.19	74	-34.81	V	PK
7206	38.54	-0.52	38.02	54	-15.98	V	AV
Middle Channel-2441MHz							
4882	52.04	-3.49	48.55	74	-25.45	H	PK
4882	49.31	-3.49	45.82	54	-8.18	H	AV
7323	44.97	-0.47	44.50	74	-29.50	H	PK
7323	38.97	-0.47	38.50	54	-15.50	H	AV
4882	48.79	-3.49	45.30	74	-28.70	V	PK
4882	45.84	-3.49	42.35	54	-11.65	V	AV
7323	38.27	-0.47	37.80	74	-36.20	V	PK
7323	37.46	-0.47	36.99	54	-17.01	V	AV
High Channel-2480MHz							
4960	52.59	-3.41	49.18	74	-24.82	H	PK
4960	48.18	-3.41	44.77	54	-9.23	H	AV
7440	44.75	-0.42	44.33	74	-29.67	H	PK
7440	37.97	-0.42	37.55	54	-16.45	H	AV
4960	46.80	-3.41	43.39	74	-30.61	V	PK
4960	44.73	-3.41	41.32	54	-12.68	V	AV
7440	37.83	-0.42	37.41	74	-36.59	V	PK
7440	34.85	-0.42	34.43	54	-19.57	V	AV

Note: 1. Testing is carried out with frequency rang 9kHz to the tenth harmonics, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

2. Average measurement was not performed if peak level is lower than average limit(54 dBuV/m) for above 1GHz.

10. Out of Band Emissions

10.1 Standard Applicable

According to §15.247 (d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30dB instead of 20dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

10.2 Test Procedure

According to ANSI C63.10-2013 section 7.8.6, the Band-edge measurements for RF conducted emissions test method as follows.

- a) Connect the EMI receiver or spectrum analyzer to the EUT using an appropriate RF cable connected to the EUT output. Configure the spectrum analyzer settings as described in step e) (be sure to enter all losses between the unlicensed wireless device output and the spectrum analyzer).
- b) Set the EUT to the lowest frequency channel (for the hopping on test, the hopping sequence shall include the lowest frequency channel).
- c) Set the EUT to operate at maximum output power and 100% duty cycle, or equivalent “normal mode of operation” as specified in 6.10.3.
- d) If using the radiated method, then use the applicable procedure(s) of 6.4, 6.5, or 6.6, and orient the EUT and measurement antenna positions to produce the highest emission level.
- e) Perform the test as follows:
 - 1) Span: Wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products that fall outside of the authorized band of operation.
 - 2) Reference level: As required to keep the signal from exceeding the maximum instrument input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than [10 log (OBW/RBW)] below the reference level. Specific guidance is given in 4.1.5.2.
 - 3) Attenuation: Auto (at least 10dB preferred).
 - 4) Sweep time: Coupled.
 - 5) Resolution bandwidth: 100kHz.
 - 6) Video bandwidth: 300kHz.
 - 7) Detector: Peak.
 - 8) Trace: Max hold.
- f) Allow the trace to stabilize. For the test with the hopping function turned ON, this can take several minutes

to achieve a reasonable probability of intercepting any emissions due to oscillator overshoot.

g) Set the marker on the emission at the band edge, or on the highest modulation product outside of the band, if this level is greater than that at the band edge. Enable the marker-delta function, and then use the marker-to-peak function to move the marker to the peak of the in-band emission.

h) Repeat step c) through step e) for every applicable modulation.

i) Set the EUT to the highest frequency channel (for the hopping on test, the hopping sequence shall include the highest frequency channel) and repeat step c) through step d).

j) The band-edge measurement shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

Restricted-band band-edge test method please refers to ANSI C63.10-2013 section 6.10.5. The emission must comply with the 15.209 limit for fall in the restricted bands listed in section 15.205. Note that the method of measurement KDB publication number: 913591 may be used for the radiated band-edge measurements.

According to ANSI C63.10-2013 section 7.8.8, Conducted spurious emissions shall be measured for the transmit frequency, per 5.5 and 5.6, and at the maximum transmit powers.


Connect the primary antenna port through an attenuator to the spectrum analyzer input; in the results, account for all losses between the unlicensed wireless device output and the spectrum analyzer. The instrument shall span 30 MHz to 10 times the operating frequency in GHz, with a resolution bandwidth of 100 kHz, video bandwidth of 300 kHz, and a coupled sweep time with a peak detector. The band 30 MHz to the highest frequency may be split into smaller spans, as long as the entire spectrum is covered.

10.3 Summary of Test Results/Plots

Note: All test modes (different data rate and different modulation) are performed, but only the worst case (GFSK) is recorded in this report.


➤ Radiated test

Test Channel	Low	Polarity:	Horizontal (worst case)
--------------	-----	-----------	-------------------------

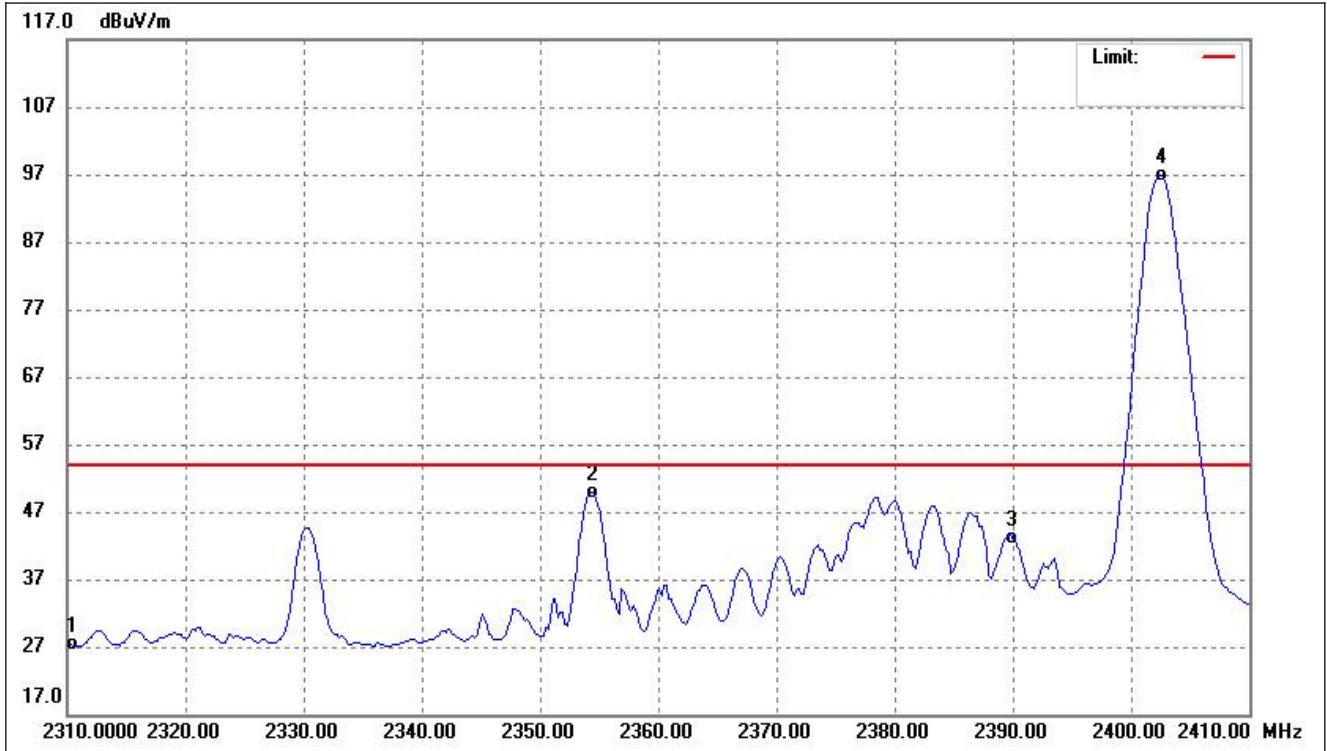

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	47.07	-19.67	27.40	54.00	-26.60	Average Detector
		60.47	-19.67	40.80	74.00	-33.20	Peak Detector
2	2354.489	69.40	-19.57	49.83	54.00	-4.17	Average Detector
		72.18	-19.49	52.69	74.00	-21.31	Peak Detector
3	2390.000	62.58	-19.49	43.09	54.00	-10.91	Average Detector
		72.18	-19.49	52.69	74.00	-21.31	Peak Detector
4	2402.585	116.32	-19.47	96.85	/	/	Average Detector
		124.15	-19.48	104.67	/	/	Peak Detector

Test Channel	High	Polarity:	Horizontal (worst case)
--------------	------	-----------	-------------------------

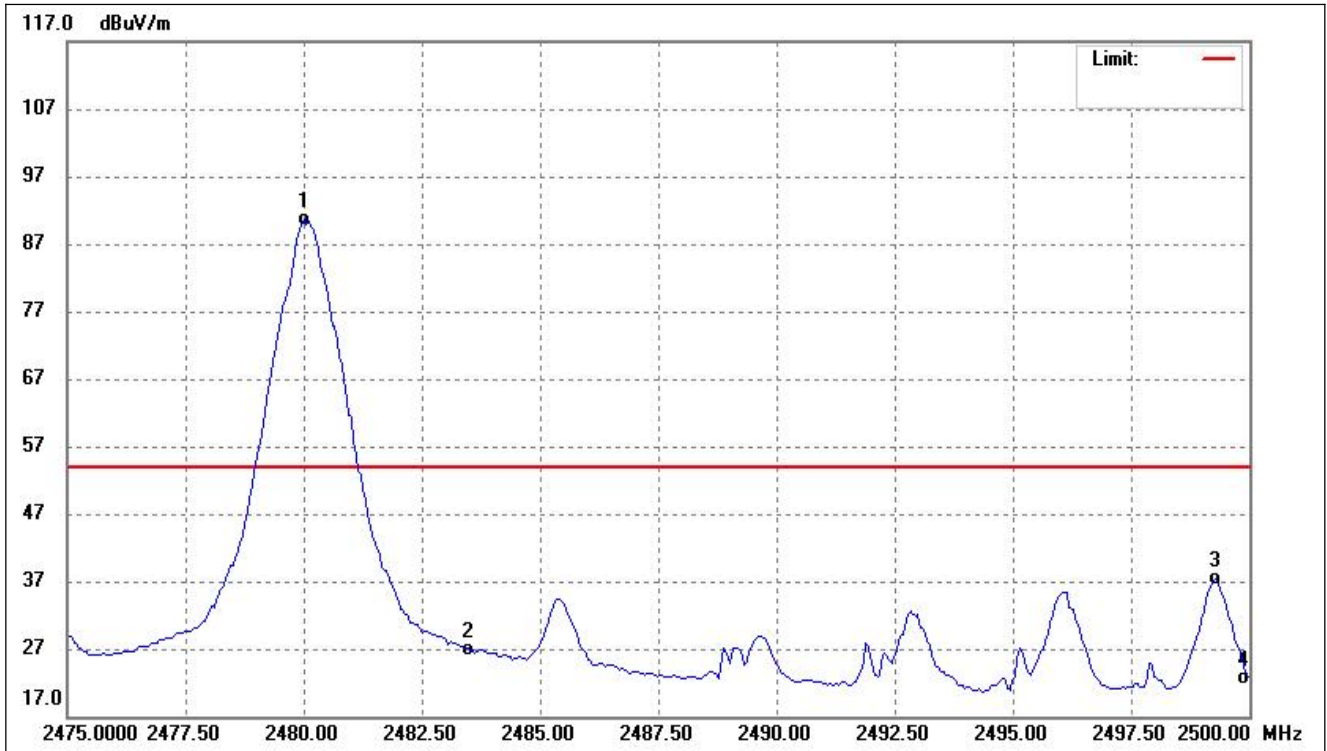

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.010	109.86	-19.29	90.57	/	/	Average Detector
	2479.760	121.24	-19.29	101.95	/	/	Peak Detector
2	2483.500	46.29	-19.29	27.00	54.00	-27.00	Average Detector
	2483.500	63.83	-19.29	44.54	74.00	-29.46	Peak Detector
3	2499.299	56.57	-19.25	37.32	54.00	-16.68	Average Detector
4	2500.000	41.89	-19.25	22.64	54.00	-31.36	Average Detector
	2500.000	63.39	-19.25	44.14	74.00	-29.86	Peak Detector

Note: Average measurement was not performed if peak level is lower than average limit(54dBuV/m) for above 1GHz.

➤ Conducted test

Please refer to Appendix E

11. Conducted Emissions


11.1 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40cm long in the middle. The spacing between the peripherals was 10cm.

11.2 Basic Test Setup Block Diagram

The conducted emission tests were performed using the setup accordance with the ANSI C63.10:2013.

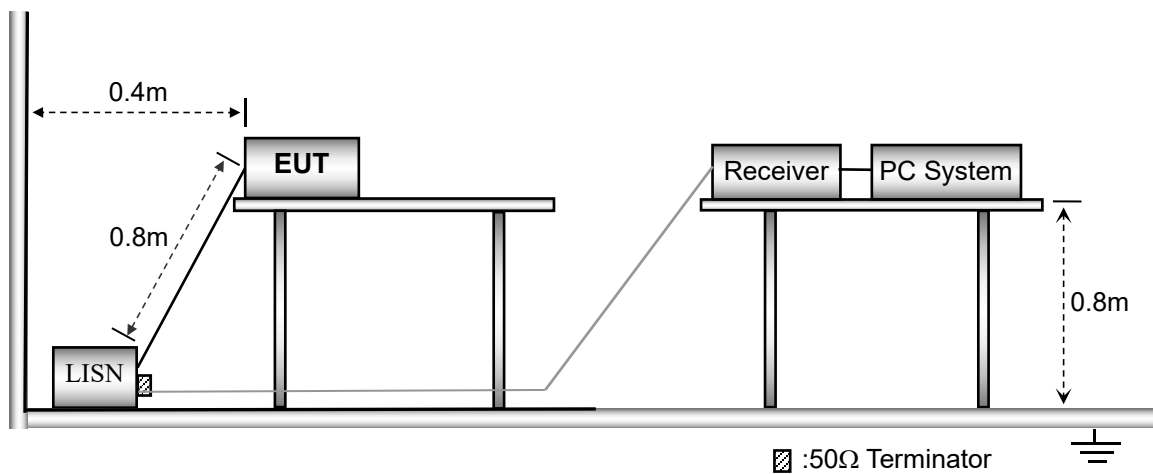


11.3 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency.....	150kHz
Stop Frequency.....	30MHz
Sweep Speed.....	Auto
IF Bandwidth.....	10kHz
Quasi-Peak Adapter Bandwidth.....	9kHz
Quasi-Peak Adapter Mode.....	Normal


11.4 Summary of Test Results/Plots

Test Mode	Communication	AC120V 60Hz	Polarity:	Neutral
-----------	---------------	-------------	-----------	---------

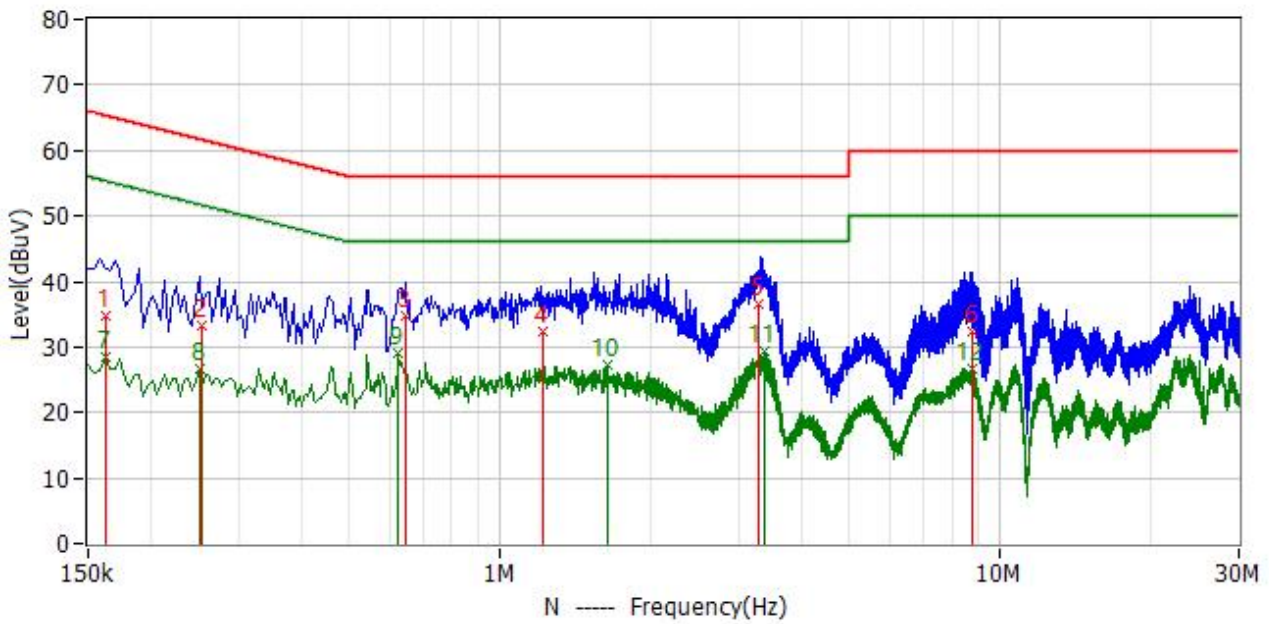

No.	Frequency	Reading dBuV	Factor dB	Level dBuV	Limit dBuV	Delta dB	Detector
1	162.000kHz	25.0	9.7	34.7	65.4	-30.7	QP
2	254.000kHz	23.8	9.6	33.4	61.6	-28.2	QP
3	646.000kHz	25.2	9.7	34.9	56.0	-21.1	QP
4	1.214MHz	22.8	9.6	32.4	56.0	-23.6	QP
5	3.298MHz	26.9	9.6	36.5	56.0	-19.5	QP
6	8.782MHz	22.6	9.7	32.3	60.0	-27.7	QP
7*	162.000kHz	18.8	9.7	28.5	55.4	-26.9	AV
8*	250.000kHz	17.2	9.6	26.8	51.8	-25.0	AV
9*	626.000kHz	19.3	9.7	29.0	46.0	-17.0	AV
10*	1.634MHz	17.6	9.6	27.2	46.0	-18.8	AV
11*	3.382MHz	19.7	9.6	29.3	46.0	-16.7	AV
12*	8.754MHz	17.1	9.7	26.8	50.0	-23.2	AV

Test Mode	Communication	AC120V 60Hz	Polarity:	Line
-----------	---------------	-------------	-----------	------

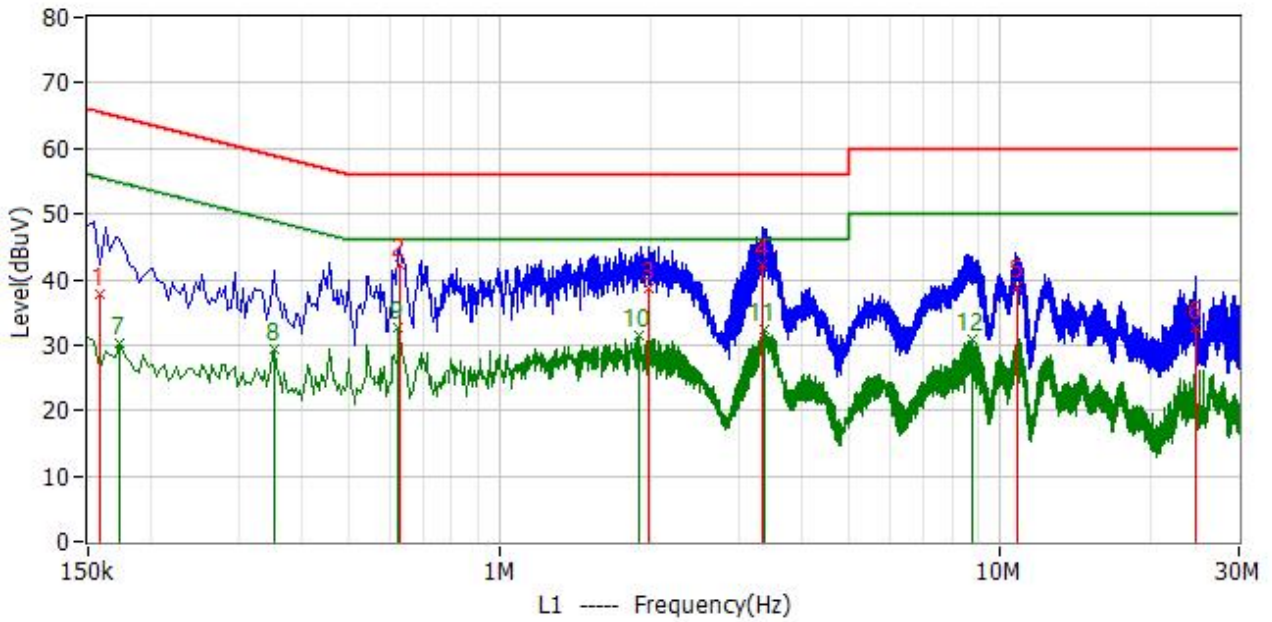

No.	Frequency	Reading dBuV	Factor dB	Level dBuV	Limit dBuV	Delta dB	Detector
1	158.000kHz	28.0	9.7	37.7	65.6	-27.9	QP
2	630.000kHz	32.6	9.7	42.3	56.0	-13.7	QP
3	1.974MHz	29.2	9.6	38.8	56.0	-17.2	QP
4	3.358MHz	32.6	9.6	42.2	56.0	-13.8	QP
5	10.778MHz	29.3	9.8	39.1	60.0	-20.9	QP
6	24.494MHz	22.8	10.0	32.8	60.0	-27.2	QP
7*	174.000kHz	20.8	9.6	30.4	54.8	-24.4	AV
8*	354.000kHz	19.9	9.6	29.5	48.9	-19.4	AV
9*	626.000kHz	23.1	9.7	32.8	46.0	-13.2	AV
10*	1.890MHz	21.8	9.6	31.4	46.0	-14.6	AV
11*	3.382MHz	22.9	9.6	32.5	46.0	-13.5	AV
12*	8.814MHz	21.2	9.7	30.9	50.0	-19.1	AV


APPENDIX SUMMARY

Project No.	WTX24X07153290W	Test Engineer	BALdi Zhong
Start date	2024/7/8	Finish date	2024/7/11
Temperature	23.8℃	Humidity	51%
RF specifications	BT-BR/EDR		

APPENDIX	Description of Test Item	Result
A	Hopping Channels and Channel Separation	Compliant
B	Dwell Time of Hopping Channel	Compliant
C	20dB Bandwidth	Compliant
D	RF Output Power	Compliant
E	Conducted Out of Band Emissions	Compliant

APPENDIX A

Hopping Channels Number			
Mode	Test Result	Limit	Result
GFSK	79	≥15	Pass
$\pi/4$ DQPSK	79	≥15	Pass
8DPSK	79	≥15	Pass
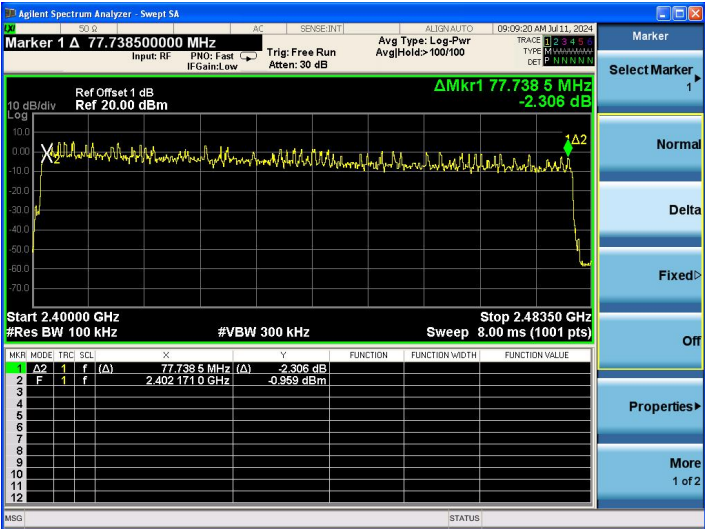
<p>GFSK</p>	 <p>Agilent Spectrum Analyzer - Swept SA</p> <p>Marker 1 Δ 78.07250000 MHz</p> <p>Ref Offset 1 dB Ref 20.00 dBm</p> <p>ΔMkr1 78.0725 MHz -6.780 dB</p> <p>Start 2.40000 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.48350 GHz Sweep 8.00 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRIG</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>A2</td> <td>1</td> <td>f</td> <td>(A)</td> <td>78.0725 MHz</td> <td>(A)</td> <td></td> <td>-6.780 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.4019205 GHz</td> <td></td> <td></td> <td>4.791 dBm</td> </tr> </tbody> </table>	MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	1	f	(A)	78.0725 MHz	(A)		-6.780 dB	2	F	1	f		2.4019205 GHz			4.791 dBm
MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	A2	1	f	(A)	78.0725 MHz	(A)		-6.780 dB																				
2	F	1	f		2.4019205 GHz			4.791 dBm																				
<p>$\pi/4$ DQPSK</p>	 <p>Agilent Spectrum Analyzer - Swept SA</p> <p>Marker 1 Δ 78.32300000 MHz</p> <p>Ref Offset 1 dB Ref 20.00 dBm</p> <p>ΔMkr1 78.3230 MHz -5.994 dB</p> <p>Start 2.40000 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.48350 GHz Sweep 8.00 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRIG</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>A2</td> <td>1</td> <td>f</td> <td>(A)</td> <td>78.3230 MHz</td> <td>(A)</td> <td></td> <td>-5.994 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.4018370 GHz</td> <td></td> <td></td> <td>4.076 dBm</td> </tr> </tbody> </table>	MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	1	f	(A)	78.3230 MHz	(A)		-5.994 dB	2	F	1	f		2.4018370 GHz			4.076 dBm
MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	A2	1	f	(A)	78.3230 MHz	(A)		-5.994 dB																				
2	F	1	f		2.4018370 GHz			4.076 dBm																				
<p>8DPSK</p>	 <p>Agilent Spectrum Analyzer - Swept SA</p> <p>Marker 1 Δ 77.73850000 MHz</p> <p>Ref Offset 1 dB Ref 20.00 dBm</p> <p>ΔMkr1 77.7385 MHz -2.306 dB</p> <p>Start 2.40000 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.48350 GHz Sweep 8.00 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRIG</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>A2</td> <td>1</td> <td>f</td> <td>(A)</td> <td>77.7385 MHz</td> <td>(A)</td> <td></td> <td>-2.306 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.4021710 GHz</td> <td></td> <td></td> <td>0.969 dBm</td> </tr> </tbody> </table>	MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	1	f	(A)	77.7385 MHz	(A)		-2.306 dB	2	F	1	f		2.4021710 GHz			0.969 dBm
MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	A2	1	f	(A)	77.7385 MHz	(A)		-2.306 dB																				
2	F	1	f		2.4021710 GHz			0.969 dBm																				

Channel Separation			
Mode	Channel	Carrier Frequencies Separation (kHz)	Result
GFSK	Low	1002	Pass
	Middle	1002	Pass
	High	1002	Pass
8DPSK	Low	1002	Pass
	Middle	1002	Pass
	High	1002	Pass

<p>GFSK-Low</p>	<p>KeySight Spectrum Analyzer - Swept SA</p> <p>Marker 1 Δ 1.00200000 MHz</p> <p>Ref Offset 1 dB Ref 20.00 dBm</p> <p>ΔMkr1 1.002 MHz -0.781 dB</p> <p>Center 2.402000 GHz #Res BW 30 kHz #VBW 100 kHz Sweep 3.200 ms (1001 pts)</p>
<p>GFSK-Middle</p>	<p>KeySight Spectrum Analyzer - Swept SA</p> <p>Marker 1 Δ 1.00200000 MHz</p> <p>Ref Offset 1 dB Ref 20.00 dBm</p> <p>ΔMkr1 1.002 MHz -0.892 dB</p> <p>Center 2.441000 GHz #Res BW 30 kHz #VBW 100 kHz Sweep 3.200 ms (1001 pts)</p>
<p>GFSK-High</p>	<p>KeySight Spectrum Analyzer - Swept SA</p> <p>Marker 1 Δ 1.00200000 MHz</p> <p>Ref Offset 1 dB Ref 20.00 dBm</p> <p>ΔMkr1 1.002 MHz -1.207 dB</p> <p>Center 2.480000 GHz #Res BW 30 kHz #VBW 100 kHz Sweep 3.200 ms (1001 pts)</p>

<p>8DPSK-Low</p>	
<p>8DPSK-Middle</p>	
<p>8DPSK-High</p>	

APPENDIX B

Dwell Time of Hopping Channel					
Modulation	Packet	Test Channel	Time Slot Length	Dwell Time	Limit
			ms	ms	ms
GFSK	DH5	Low	2.956	315.31	≤400
		Middle	2.956	315.31	≤400
		High	2.956	315.31	≤400
π/4 DQPSK	2DH5	Low	2.980	317.87	≤400
		Middle	2.980	317.87	≤400
		High	2.980	317.87	≤400
8DPSK	3DH5	Low	2.976	317.44	≤400
		Middle	2.976	317.44	≤400
		High	2.976	317.44	≤400




Note: The test period: $T = 0.4 \text{ Second} * 79 \text{ Channel} = 31.6 \text{ s}$




Dwell time = time slot length * (Hopping rate / Number of hopping channels) * Period




Dwell time = Pulse time (ms) × (1600 ÷ 2 ÷ 79) × 31.6 Second for DH1, 2-DH1, 3-DH1

Dwell time = Pulse time (ms) × (1600 ÷ 4 ÷ 79) × 31.6 Second for DH3, 2-DH3, 3-DH3

Dwell time = Pulse time (ms) × (1600 ÷ 6 ÷ 79) × 31.6 Second for DH5, 2-DH5, 3-DH5

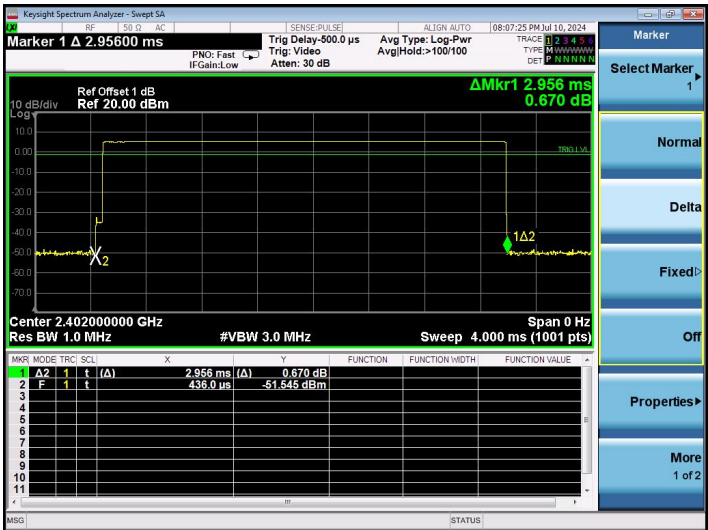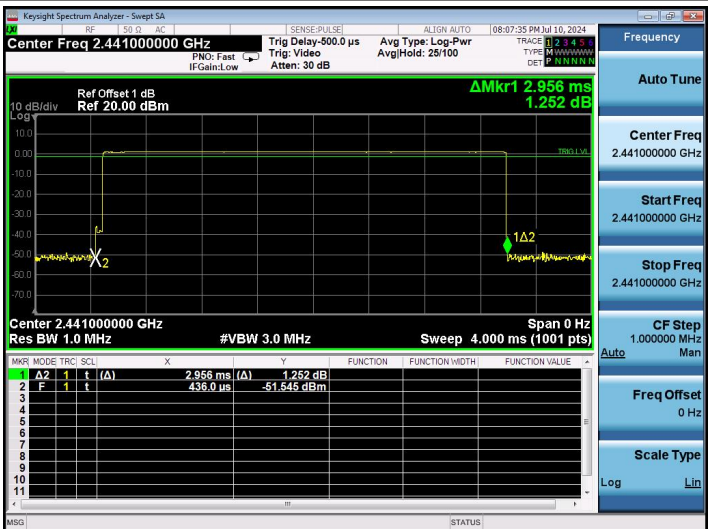
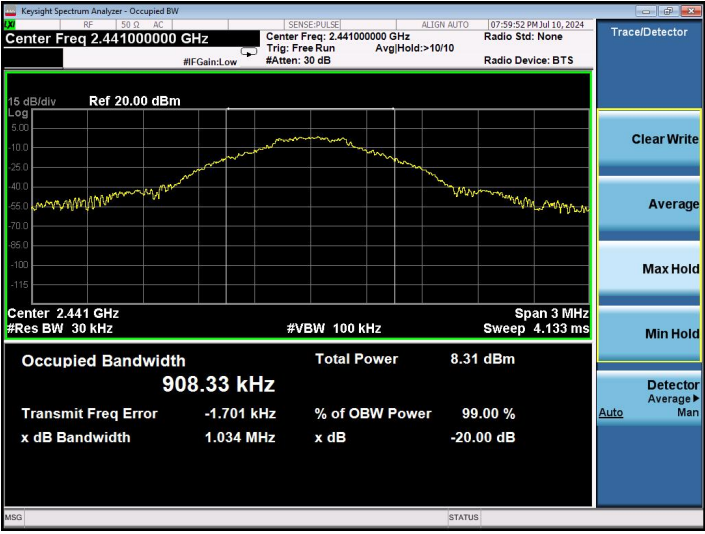

<p>DH5-Low</p>	 <p>Marker 1 Δ 2.95600 ms</p> <p>Center 2.40200000 GHz</p> <p>Res BW 1.0 MHz</p> <p>Span 0 Hz</p> <p>Ref Offset 1 dB</p> <p>Ref 20.00 dBm</p> <p>ΔMkr1 2.956 ms</p> <p>0.670 dB</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRIG</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>A2</td> <td>1</td> <td>t</td> <td>(A)</td> <td>2.956 ms</td> <td>(A)</td> <td></td> <td>0.670 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>t</td> <td></td> <td>436.0 μs</td> <td></td> <td></td> <td>-51.545 dBm</td> </tr> </tbody> </table>	MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	1	t	(A)	2.956 ms	(A)		0.670 dB	2	F	1	t		436.0 μ s			-51.545 dBm
MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	A2	1	t	(A)	2.956 ms	(A)		0.670 dB																				
2	F	1	t		436.0 μ s			-51.545 dBm																				
<p>DH5-Middle</p>	 <p>Center Freq 2.441000000 GHz</p> <p>Center 2.441000000 GHz</p> <p>Res BW 1.0 MHz</p> <p>Span 0 Hz</p> <p>Ref Offset 1 dB</p> <p>Ref 20.00 dBm</p> <p>ΔMkr1 2.956 ms</p> <p>1.252 dB</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRIG</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>A2</td> <td>1</td> <td>t</td> <td>(A)</td> <td>2.956 ms</td> <td>(A)</td> <td></td> <td>1.252 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>t</td> <td></td> <td>436.0 μs</td> <td></td> <td></td> <td>-51.545 dBm</td> </tr> </tbody> </table>	MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	1	t	(A)	2.956 ms	(A)		1.252 dB	2	F	1	t		436.0 μ s			-51.545 dBm
MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	A2	1	t	(A)	2.956 ms	(A)		1.252 dB																				
2	F	1	t		436.0 μ s			-51.545 dBm																				
<p>DH5-High</p>	 <p>Video Trig Level -7.00 dBm</p> <p>Center 2.480000000 GHz</p> <p>Res BW 1.0 MHz</p> <p>Span 0 Hz</p> <p>Ref Offset 1 dB</p> <p>Ref 20.00 dBm</p> <p>ΔMkr1 2.956 ms</p> <p>0.965 dB</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRIG</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>A2</td> <td>1</td> <td>t</td> <td>(A)</td> <td>2.956 ms</td> <td>(A)</td> <td></td> <td>0.965 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>t</td> <td></td> <td>436.0 μs</td> <td></td> <td></td> <td>-51.545 dBm</td> </tr> </tbody> </table>	MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	1	t	(A)	2.956 ms	(A)		0.965 dB	2	F	1	t		436.0 μ s			-51.545 dBm
MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	A2	1	t	(A)	2.956 ms	(A)		0.965 dB																				
2	F	1	t		436.0 μ s			-51.545 dBm																				

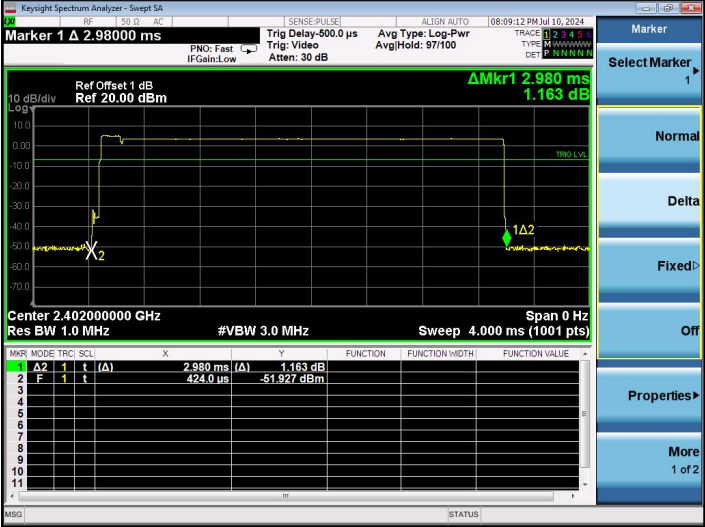
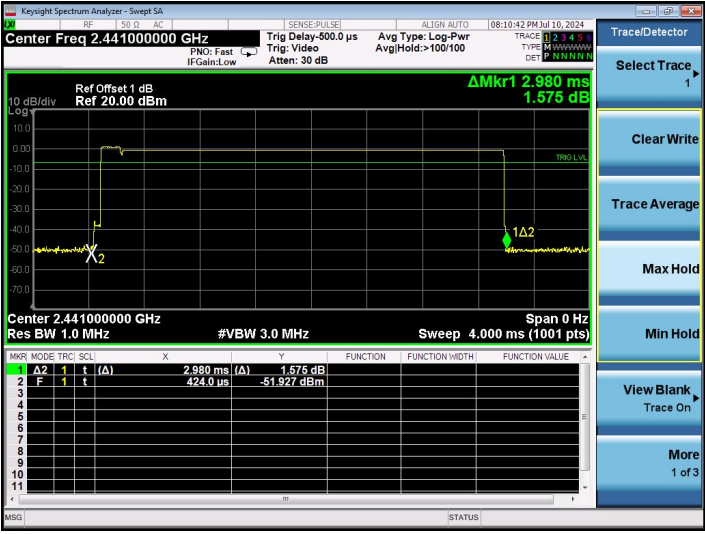
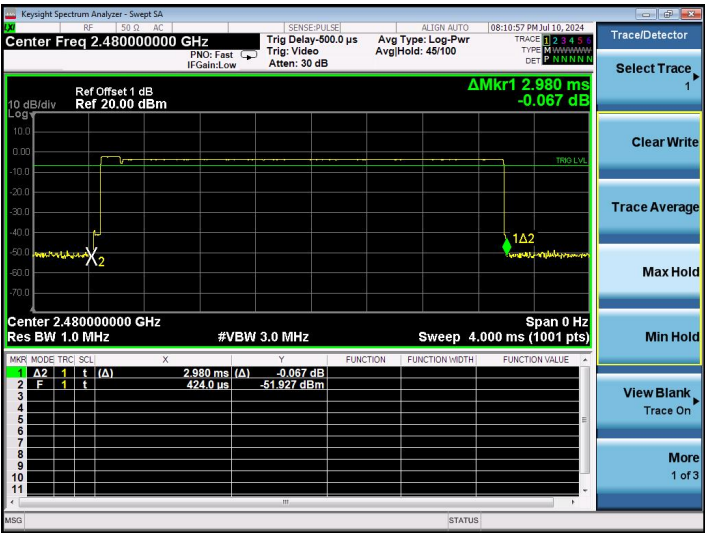
<p>2DH5-Low</p>	 <p>Marker 1 Δ 2.98000 ms Ref Offset 1 dB Ref 20.00 dBm ΔMkr1 2.980 ms 1.163 dB Center 2.40200000 GHz Res BW 1.0 MHz #VBW 3.0 MHz Sweep 4.000 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>A2</td> <td>1</td> <td>t</td> <td>(Δ)</td> <td>2.980 ms</td> <td>(Δ)</td> <td></td> <td>1.163 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>t</td> <td>(Δ)</td> <td>424.0 μs</td> <td></td> <td></td> <td>-51.927 dBm</td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	1	t	(Δ)	2.980 ms	(Δ)		1.163 dB	2	F	1	t	(Δ)	424.0 μ s			-51.927 dBm
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	A2	1	t	(Δ)	2.980 ms	(Δ)		1.163 dB																				
2	F	1	t	(Δ)	424.0 μ s			-51.927 dBm																				
<p>2DH5-Middle</p>	 <p>Center Freq 2.44100000 GHz Ref Offset 1 dB Ref 20.00 dBm ΔMkr1 2.980 ms 1.575 dB Center 2.44100000 GHz Res BW 1.0 MHz #VBW 3.0 MHz Sweep 4.000 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>A2</td> <td>1</td> <td>t</td> <td>(Δ)</td> <td>2.980 ms</td> <td>(Δ)</td> <td></td> <td>1.575 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>t</td> <td>(Δ)</td> <td>424.0 μs</td> <td></td> <td></td> <td>-51.927 dBm</td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	1	t	(Δ)	2.980 ms	(Δ)		1.575 dB	2	F	1	t	(Δ)	424.0 μ s			-51.927 dBm
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	A2	1	t	(Δ)	2.980 ms	(Δ)		1.575 dB																				
2	F	1	t	(Δ)	424.0 μ s			-51.927 dBm																				
<p>2DH5-High</p>	 <p>Center Freq 2.48000000 GHz Ref Offset 1 dB Ref 20.00 dBm ΔMkr1 2.980 ms -0.067 dB Center 2.48000000 GHz Res BW 1.0 MHz #VBW 3.0 MHz Sweep 4.000 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>A2</td> <td>1</td> <td>t</td> <td>(Δ)</td> <td>2.980 ms</td> <td>(Δ)</td> <td></td> <td>-0.067 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>t</td> <td>(Δ)</td> <td>424.0 μs</td> <td></td> <td></td> <td>-51.927 dBm</td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	1	t	(Δ)	2.980 ms	(Δ)		-0.067 dB	2	F	1	t	(Δ)	424.0 μ s			-51.927 dBm
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	A2	1	t	(Δ)	2.980 ms	(Δ)		-0.067 dB																				
2	F	1	t	(Δ)	424.0 μ s			-51.927 dBm																				
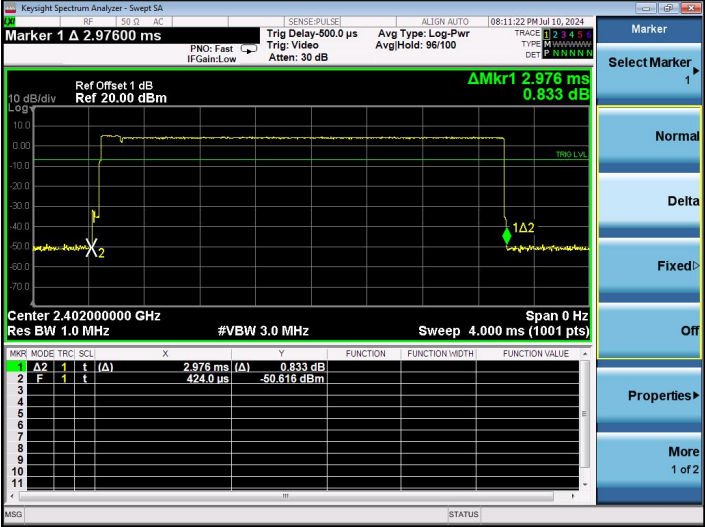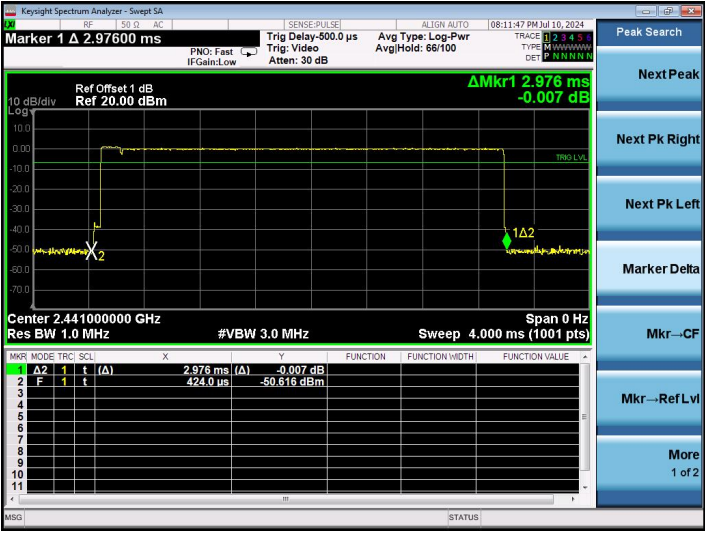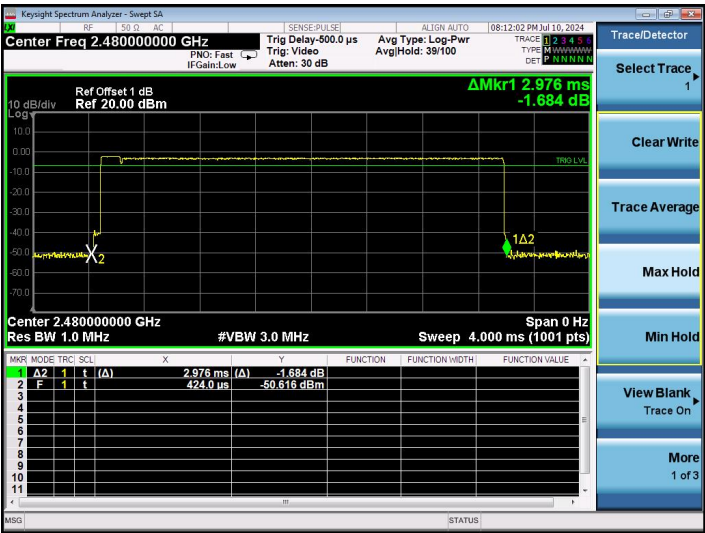
<p>3DH5-Low</p>	 <p>Marker 1 Δ 2.97600 ms</p> <p>Ref Offset 1 dB Ref 20.00 dBm</p> <p>ΔMkr1 2.976 ms 0.833 dB</p> <p>Center 2.40200000 GHz Res BW 1.0 MHz #VBW 3.0 MHz Sweep 4.000 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>A2</td> <td>1</td> <td>t</td> <td>(Δ)</td> <td>2.976 ms</td> <td>(Δ)</td> <td></td> <td>0.833 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>t</td> <td></td> <td>424.0 μs</td> <td></td> <td></td> <td>-50.616 dBm</td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	1	t	(Δ)	2.976 ms	(Δ)		0.833 dB	2	F	1	t		424.0 μ s			-50.616 dBm
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	A2	1	t	(Δ)	2.976 ms	(Δ)		0.833 dB																				
2	F	1	t		424.0 μ s			-50.616 dBm																				
<p>3DH5-Middle</p>	 <p>Marker 1 Δ 2.97600 ms</p> <p>Ref Offset 1 dB Ref 20.00 dBm</p> <p>ΔMkr1 2.976 ms -0.007 dB</p> <p>Center 2.44100000 GHz Res BW 1.0 MHz #VBW 3.0 MHz Sweep 4.000 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>A2</td> <td>1</td> <td>t</td> <td>(Δ)</td> <td>2.976 ms</td> <td>(Δ)</td> <td></td> <td>-0.007 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>t</td> <td></td> <td>424.0 μs</td> <td></td> <td></td> <td>-50.616 dBm</td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	1	t	(Δ)	2.976 ms	(Δ)		-0.007 dB	2	F	1	t		424.0 μ s			-50.616 dBm
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	A2	1	t	(Δ)	2.976 ms	(Δ)		-0.007 dB																				
2	F	1	t		424.0 μ s			-50.616 dBm																				
<p>3DH5-High</p>	 <p>Center Freq 2.48000000 GHz</p> <p>Ref Offset 1 dB Ref 20.00 dBm</p> <p>ΔMkr1 2.976 ms -1.684 dB</p> <p>Center 2.48000000 GHz Res BW 1.0 MHz #VBW 3.0 MHz Sweep 4.000 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>A2</td> <td>1</td> <td>t</td> <td>(Δ)</td> <td>2.976 ms</td> <td>(Δ)</td> <td></td> <td>-1.684 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>t</td> <td></td> <td>424.0 μs</td> <td></td> <td></td> <td>-50.616 dBm</td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	1	t	(Δ)	2.976 ms	(Δ)		-1.684 dB	2	F	1	t		424.0 μ s			-50.616 dBm
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	A2	1	t	(Δ)	2.976 ms	(Δ)		-1.684 dB																				
2	F	1	t		424.0 μ s			-50.616 dBm																				

APPENDIX C

20 dB Bandwidth			
Test Mode	Test Channel MHz	20 dB Bandwidth MHz	Result
GFSK	2402	1.052	Pass
	2441	1.034	Pass
	2480	1.023	Pass
$\pi/4$ DQPSK	2402	1.286	Pass
	2441	1.292	Pass
	2480	1.310	Pass
8DPSK	2402	1.293	Pass
	2441	1.259	Pass
	2480	1.304	Pass

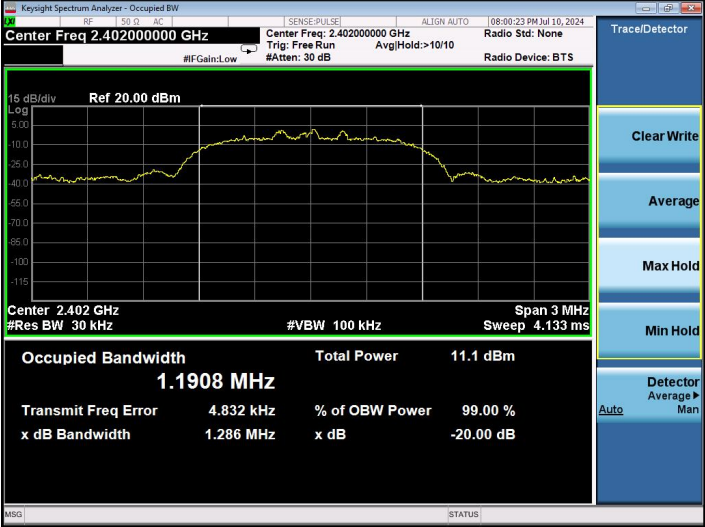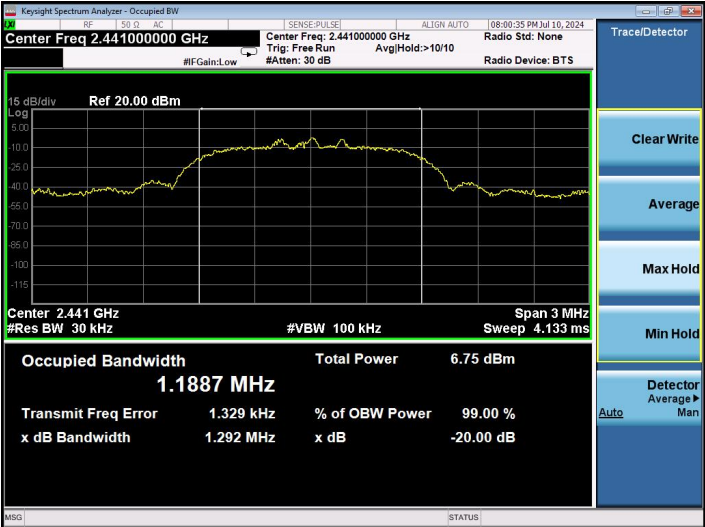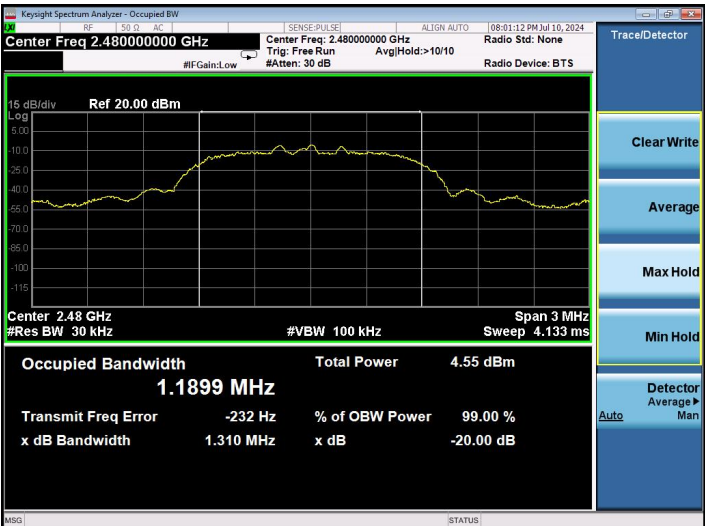


<p>GFSK-Low</p>	 <p>Center Freq: 2.40200000 GHz Total Power: 13.0 dBm Occupied Bandwidth: 909.40 kHz Transmit Freq Error: 7.007 kHz x dB Bandwidth: 1.052 MHz</p>
<p>GFSK-Middle</p>	 <p>Center Freq: 2.441000000 GHz Total Power: 8.31 dBm Occupied Bandwidth: 908.33 kHz Transmit Freq Error: -1.701 kHz x dB Bandwidth: 1.034 MHz</p>
<p>GFSK-High</p>	 <p>Center Freq: 2.480000000 GHz Total Power: 5.36 dBm Occupied Bandwidth: 914.90 kHz Transmit Freq Error: 1.164 kHz x dB Bandwidth: 1.023 MHz</p>

<p>$\pi/4$ DQPSK-Low</p>	 <p>KeySight Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.40200000 GHz</p> <p>Center Freq: 2.40200000 GHz</p> <p>Trig: Free Run</p> <p>Avg Hold:>10/10</p> <p>Radio Std: None</p> <p>#IFGain:Low</p> <p>#Atten: 30 dB</p> <p>Radio Device: BTS</p> <p>15 dB/div Ref 20.00 dBm</p> <p>Log</p> <p>Center 2.402 GHz</p> <p>#Res BW 30 kHz</p> <p>#VBW 100 kHz</p> <p>Span 3 MHz</p> <p>Sweep 4.133 ms</p> <p>Occupied Bandwidth 1.1908 MHz</p> <p>Total Power 11.1 dBm</p> <p>Transmit Freq Error 4.832 kHz</p> <p>% of OBW Power 99.00 %</p> <p>x dB Bandwidth 1.286 MHz</p> <p>x dB -20.00 dB</p> <p>MSG STATUS</p>
<p>$\pi/4$ DQPSK-Middle</p>	 <p>KeySight Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.44100000 GHz</p> <p>Center Freq: 2.44100000 GHz</p> <p>Trig: Free Run</p> <p>Avg Hold:>10/10</p> <p>Radio Std: None</p> <p>#IFGain:Low</p> <p>#Atten: 30 dB</p> <p>Radio Device: BTS</p> <p>15 dB/div Ref 20.00 dBm</p> <p>Log</p> <p>Center 2.441 GHz</p> <p>#Res BW 30 kHz</p> <p>#VBW 100 kHz</p> <p>Span 3 MHz</p> <p>Sweep 4.133 ms</p> <p>Occupied Bandwidth 1.1887 MHz</p> <p>Total Power 6.75 dBm</p> <p>Transmit Freq Error 1.329 kHz</p> <p>% of OBW Power 99.00 %</p> <p>x dB Bandwidth 1.292 MHz</p> <p>x dB -20.00 dB</p> <p>MSG STATUS</p>
<p>$\pi/4$ DQPSK-High</p>	 <p>KeySight Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.48000000 GHz</p> <p>Center Freq: 2.48000000 GHz</p> <p>Trig: Free Run</p> <p>Avg Hold:>10/10</p> <p>Radio Std: None</p> <p>#IFGain:Low</p> <p>#Atten: 30 dB</p> <p>Radio Device: BTS</p> <p>15 dB/div Ref 20.00 dBm</p> <p>Log</p> <p>Center 2.48 GHz</p> <p>#Res BW 30 kHz</p> <p>#VBW 100 kHz</p> <p>Span 3 MHz</p> <p>Sweep 4.133 ms</p> <p>Occupied Bandwidth 1.1899 MHz</p> <p>Total Power 4.55 dBm</p> <p>Transmit Freq Error -232 Hz</p> <p>% of OBW Power 99.00 %</p> <p>x dB Bandwidth 1.310 MHz</p> <p>x dB -20.00 dB</p> <p>MSG STATUS</p>



<p>8DPSK-Low</p>	<p>Keysight Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.40200000 GHz</p> <p>Center Freq: 2.40200000 GHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: >10/10</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref 20.00 dBm</p> <p>15 dB/div</p> <p>Log</p> <p>Center 2.402 GHz</p> <p>#Res BW 30 kHz</p> <p>#VBW 100 kHz</p> <p>Span 3 MHz</p> <p>Sweep 4.133 ms</p> <p>Occupied Bandwidth 1.1874 MHz</p> <p>Total Power 11.6 dBm</p> <p>Transmit Freq Error 7.782 kHz</p> <p>% of OBW Power 99.00 %</p> <p>x dB Bandwidth 1.293 MHz</p> <p>x dB -20.00 dB</p>
<p>8DPSK-Middle</p>	<p>Keysight Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.44100000 GHz</p> <p>Center Freq: 2.44100000 GHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: >10/10</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref 20.00 dBm</p> <p>15 dB/div</p> <p>Log</p> <p>Center 2.441 GHz</p> <p>#Res BW 30 kHz</p> <p>#VBW 100 kHz</p> <p>Span 3 MHz</p> <p>Sweep 4.133 ms</p> <p>Occupied Bandwidth 1.1830 MHz</p> <p>Total Power 6.27 dBm</p> <p>Transmit Freq Error 7.335 kHz</p> <p>% of OBW Power 99.00 %</p> <p>x dB Bandwidth 1.259 MHz</p> <p>x dB -20.00 dB</p>
<p>8DPSK-High</p>	<p>Keysight Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.48000000 GHz</p> <p>Center Freq: 2.48000000 GHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: >10/10</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref 20.00 dBm</p> <p>15 dB/div</p> <p>Log</p> <p>Center 2.48 GHz</p> <p>#Res BW 30 kHz</p> <p>#VBW 100 kHz</p> <p>Span 3 MHz</p> <p>Sweep 4.133 ms</p> <p>Occupied Bandwidth 1.1975 MHz</p> <p>Total Power 4.69 dBm</p> <p>Transmit Freq Error -1.858 kHz</p> <p>% of OBW Power 99.00 %</p> <p>x dB Bandwidth 1.304 MHz</p> <p>x dB -20.00 dB</p>

APPENDIX D

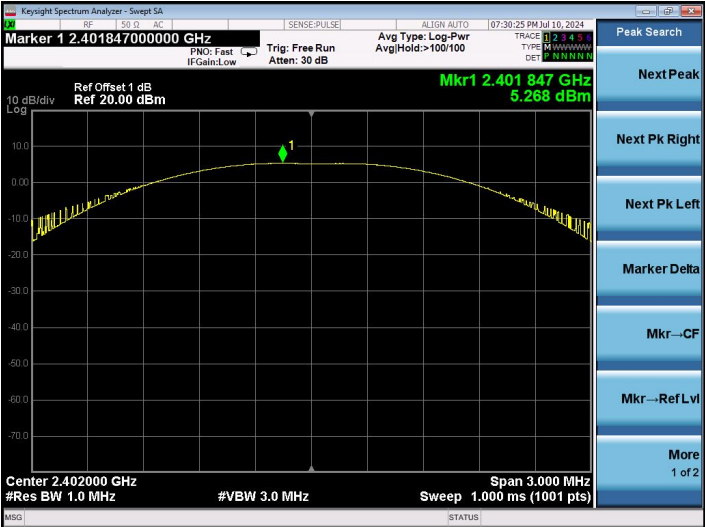RF Output Power				
Modulation type	Channel	Output power (dBm)	Limit (dBm)	Result
GFSK	Low	5.268	30.00	Pass
	Middle	1.233		
	High	-2.009		
$\pi/4$ DQPSK	Low	5.231	20.97	Pass
	Middle	1.212		
	High	-2.057		
8DPSK	Low	5.262	20.97	Pass
	Middle	1.162		
	High	-2.051		

<p>GFSK-Low</p>	 <p>Marker 1 2.401847000000 GHz Ref Offset 1 dB Ref 20.00 dBm Mkr1 2.401 847 GHz 5.268 dBm Center 2.402000 GHz #Res BW 1.0 MHz #VBW 3.0 MHz Span 3.000 MHz Sweep 1.000 ms (1001 pts)</p>
<p>GFSK-Middle</p>	 <p>Marker 1 2.440823000000 GHz Ref Offset 1 dB Ref 20.00 dBm Mkr1 2.440 823 GHz 1.233 dBm Center 2.441000 GHz #Res BW 1.0 MHz #VBW 3.0 MHz Span 3.000 MHz Sweep 1.000 ms (1001 pts)</p>
<p>GFSK-High</p>	 <p>Marker 1 2.479835000000 GHz Ref Offset 1 dB Ref 20.00 dBm Mkr1 2.479 835 GHz -2.009 dBm Center 2.480000 GHz #Res BW 1.0 MHz #VBW 3.0 MHz Span 3.000 MHz Sweep 1.000 ms (1001 pts)</p>

<p>$\pi/4$ DQPSK-Low</p>	<p>KeySight Spectrum Analyzer - Swept SA</p> <p>Marker 1 2.401830000000 GHz</p> <p>Ref Offset 1 dB Ref 20.00 dBm</p> <p>Mkr1 2.401 83 GHz 5.231 dBm</p> <p>Center 2.402000 GHz #Res BW 3.0 MHz #VBW 8.0 MHz Sweep 1.000 ms (1001 pts)</p>
<p>$\pi/4$ DQPSK-Middle</p>	<p>KeySight Spectrum Analyzer - Swept SA</p> <p>Marker 1 2.440730000000 GHz</p> <p>Ref Offset 1 dB Ref 20.00 dBm</p> <p>Mkr1 2.440 73 GHz 1.212 dBm</p> <p>Center 2.441000 GHz #Res BW 3.0 MHz #VBW 8.0 MHz Sweep 1.000 ms (1001 pts)</p>
<p>$\pi/4$ DQPSK-High</p>	<p>KeySight Spectrum Analyzer - Swept SA</p> <p>Marker 1 2.479730000000 GHz</p> <p>Ref Offset 1 dB Ref 20.00 dBm</p> <p>Mkr1 2.479 73 GHz -2.057 dBm</p> <p>Center 2.480000 GHz #Res BW 3.0 MHz #VBW 8.0 MHz Sweep 1.000 ms (1001 pts)</p>
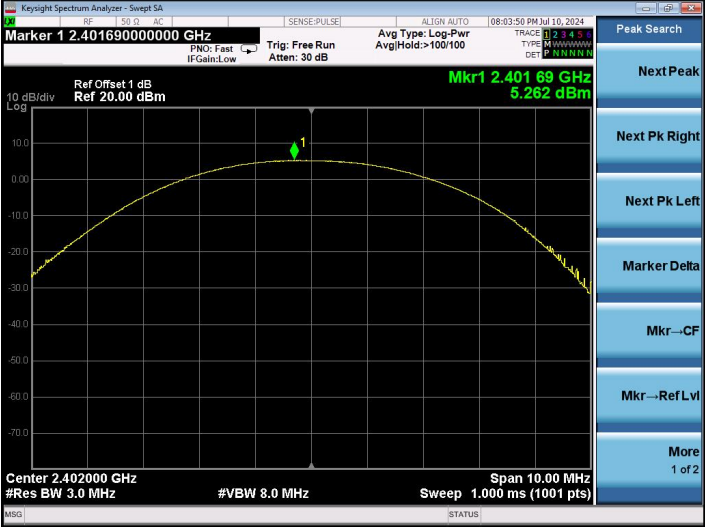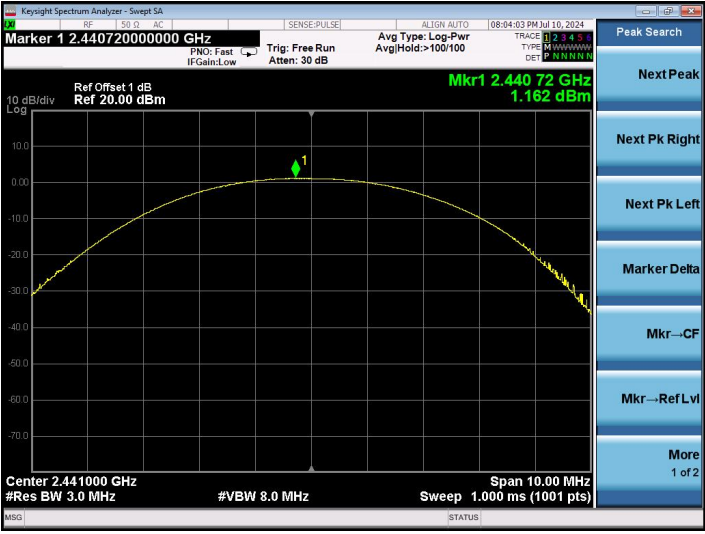
<p>8DPSK-Low</p>	
<p>8DPSK-Middle</p>	
<p>8DPSK-High</p>	