

No. 1 Workshop, M-10, Middle section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057

 Telephone:
 +86 (0) 755 2601 2053

 Fax:
 +86 (0) 755 2671 0594

 Email:
 ee.shenzhen@sgs.com

Report No.: SZEM150900604702 Page: 1 of 99

FCC REPORT

Test Result:	PASS *
Date of Issue:	2015-11-09
Date of Test:	2015-11-02 to 2015-11-05
Date of Receipt:	2015-09-29
Standards:	47 CFR Part 15, Subpart C (2014)
FCC ID:	A4E315-10
Trade Mark:	eMoMo
Add Model No.:	315-10B, 315-10
Model No.(EUT):	315-10A
Product Name:	315-10A Sofa Audio system
Factory:	eMoMo Technology Co., Ltd
Manufacturer:	eMoMo Technology Co., Ltd
Applicant:	eMoMo Technology Co., Ltd
Application No:	SZEM1509006047CR

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Jack Zhang EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.



Report No.: SZEM150900604702 Page: 2 of 99

2 Version

Revision Record						
Version	Chapter	Date	Modifier	Remark		
00		2015-11-09		Original		

Authorized for issue by:		
Tested By	Benson Wang	2015-11-05
	(Benson Wang) /Project Engineer	Date
Prepared By	Venus Wu	2015-11-09
	(Venus Wu) /Clerk	Date
Checked By	Eric Fu	2015-11-09
	(Eric Fu) /Reviewer	Date



Report No.: SZEM150900604702 Page: 3 of 99

3 Test Summary

Test Item	Test Requirement	Test method	Result	
Antenna Requirement	47 CFR Part 15, Subpart C Section 15.203/15.247 (c)	ANSI C63.10 (2009)	PASS	
AC Power Line Conducted Emission	47 CFR Part 15, Subpart C Section 15.207	ANSI C63.10 (2009)	PASS	
Conducted Peak Output Power	47 CFR Part 15, Subpart C Section 15.247 (b)(1)	ANSI C63.10 (2009)	PASS	
20dB Occupied Bandwidth	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10 (2009)	PASS	
Carrier Frequencies Separation	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10 (2009)	PASS	
Hopping Channel Number	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10 (2009)	PASS	
Dwell Time	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10 (2009)	PASS	
Pseudorandom Frequency Hopping Sequence	47 CFR Part 15, Subpart C Section 15.247(b)(4)&TCB Exclusion List (7 July 2002)	ANSI C63.10 (2009)	PASS	
Band-edge for RF Conducted Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 (2009)	PASS	
RF Conducted Spurious Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 (2009)	PASS	
Radiated Spurious emissions	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 (2009)	PASS	
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 (2009)	PASS	

Remark:

Model No.: 315-10A, 315-10B, 315-10

Only the model 315-10A was tested, since the electrical circuit design, layout, components used and internal wiring were identical for all above models. Only different on model name and color.



Report No.: SZEM150900604702 Page: 4 of 99

4 Contents

1	cc	OVER PAGE	1
2	VE	RSION	2
3	TE	ST SUMMARY	3
_		DNTENTS	
4			
5	GE	NERAL INFORMATION	5
	5.1	CLIENT INFORMATION	
	5.2	GENERAL DESCRIPTION OF EUT	
	5.3	Test Environment	
	5.4	DESCRIPTION OF SUPPORT UNITS	
	5.5	TEST LOCATION	
	5.6	TEST FACILITY	
	5.7	DEVIATION FROM STANDARDS	
	5.8	ABNORMALITIES FROM STANDARD CONDITIONS	
	5.9	OTHER INFORMATION REQUESTED BY THE CUSTOMER	
	5.10	Equipment List	9
6	TE	ST RESULTS AND MEASUREMENT DATA	
	6.1	ANTENNA REQUIREMENT	
	6.2	CONDUCTED EMISSIONS	
	6.3	CONDUCTED PEAK OUTPUT POWER	
	6.4	20dB Occupy Bandwidth	
	6.5	CARRIER FREQUENCIES SEPARATION	
	6.6	HOPPING CHANNEL NUMBER	
	6.7	DWELL TIME	
	6.8	BAND-EDGE FOR RF CONDUCTED EMISSIONS	
	6.9	SPURIOUS RF CONDUCTED EMISSIONS	
	6.10	OTHER REQUIREMENTS FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM	
	6.11	RADIATED SPURIOUS EMISSION	
		1.1 Radiated Emission below 1GHz	
	6.1	1.2 Transmitter Emission above 1GHz	
	6.12	RESTRICTED BANDS AROUND FUNDAMENTAL FREQUENCY	
7	PH	IOTOGRAPHS - EUT TEST SETUP	
	7.1	CONDUCTED EMISSION	
	7.2	RADIATED EMISSION	
	7.3	RADIATED SPURIOUS EMISSION	
8	PH	IOTOGRAPHS - EUT CONSTRUCTIONAL DETAILS	



Report No.: SZEM150900604702 Page: 5 of 99

5 General Information

5.1 Client Information

Applicant:	eMoMo Technology Co., Ltd
Address of Applicant:	4th Floor, Yonghe Building, Taiwan Industrial Park, Shiyan Town, Shenzhen, China
Manufacturer:	eMoMo Technology Co., Ltd
Address of Manufacturer:	4th Floor, Yonghe Building, Taiwan Industrial Park, Shiyan Town, Shenzhen, China
Factory:	eMoMo Technology Co., Ltd
Address of Factory:	4th Floor, Yonghe Building, Taiwan Industrial Park, Shiyan Town, Shenzhen, China

5.2 General Description of EUT

Product Name:	315-10A Sofa Audio system
Model No.:	315-10A
Trade Mark:	еМоМо
Operation Frequency:	2402MHz~2480MHz
Bluetooth Version:	BT 2.1+EDR
Modulation Type:	GFSK, π/4DQPSK, 8DPSK
Number of Channel:	79
Sample Type:	Portable production
Antenna Type:	Integral
Antenna Gain:	0dBi
Power Supply:	Adaptor for RX Model:RSS1006-240120-W2
	Input:AC100-240V 50/60Hz 0.6A
	Output:DC12V 2A 24W MAX

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM150900604702 Page: 6 of 99

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
0	2402MHz	20	2422MHz	40	2442MHz	60	2462MHz
1	2403MHz	21	2423MHz	41	2443MHz	61	2463MHz
2	2404MHz	22	2424MHz	42	2444MHz	62	2464MHz
3	2405MHz	23	2425MHz	43	2445MHz	63	2465MHz
4	2406MHz	24	2426MHz	44	2446MHz	64	2466MHz
5	2407MHz	25	2427MHz	45	2447MHz	65	2467MHz
6	2408MHz	26	2428MHz	46	2448MHz	66	2468MHz
7	2409MHz	27	2429MHz	47	2449MHz	67	2469MHz
8	2410MHz	28	2430MHz	48	2450MHz	68	2470MHz
9	2411MHz	29	2431MHz	49	2451MHz	69	2471MHz
10	2412MHz	30	2432MHz	50	2452MHz	70	2472MHz
11	2413MHz	31	2433MHz	51	2453MHz	71	2473MHz
12	2414MHz	32	2434MHz	52	2454MHz	72	2474MHz
13	2415MHz	33	2435MHz	53	2455MHz	73	2475MHz
14	2416MHz	34	2436MHz	54	2456MHz	74	2476MHz
15	2417MHz	35	2437MHz	55	2457MHz	75	2477MHz
16	2418MHz	36	2438MHz	56	2458MHz	76	2478MHz
17	2419MHz	37	2439MHz	57	2459MHz	77	2479MHz
18	2420MHz	38	2440MHz	58	2460MHz	78	2480MHz
19	2421MHz	39	2441MHz	59	2461MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The Lowest channel	2402MHz
The Middle channel	2441MHz
The Highest channel	2480MHz

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM150900604702 Page: 7 of 99

5.3 Test Environment

Operating Environment:			
Temperature:	25.0 °C		
Humidity:	53 % RH		
Atmospheric Pressure:	995mbar		

5.4 Description of Support Units

The EUT has been tested independent unit.

5.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch E&E Lab,

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China. 518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594 No tests were sub-contracted.

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM150900604702 Page: 8 of 99

5.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS (No. CNAS L2929)

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

• A2LA (Certificate No. 3816.01)

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

• VCCI

The 10m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-823, R-4188, T-1153 and C-2383 respectively.

FCC – Registration No.: 556682

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 556682.

Industry Canada (IC)

The 3m Semi-anechoic chambers and the 10m Semi-anechoic chambers of SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-2, 4620C-3.

5.7 Deviation from Standards

None.

5.8 Abnormalities from Standard Conditions

None.

5.9 Other Information Requested by the Customer

None.



Report No.: SZEM150900604702 Page: 9 of 99

5.10Equipment List

	Conducted Emission						
ltem	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy-mm-dd)	Cal.Due date (yyyy-mm-dd)	
1	Shielding Room	ZhongYu Electron	GB-88	SEL0042	2015-05-13	2016-05-13	
2	LISN	Rohde & Schwarz	ENV216	SEL0152	2015-10-09	2016-10-09	
3	LISN	ETS-LINDGREN	3816/2	SEL0021	2015-05-13	2016-05-13	
4	8 Line ISN	Fischer Custom Communications Inc.	FCC-TLIS N-T8-02	SEL0162	2015-08-30	2016-08-30	
5	4 Line ISN	Fischer Custom Communications Inc.	FCC-TLIS N-T4-02	SEL0163	2015-08-30	2016-08-30	
6	2 Line ISN	Fischer Custom Communications Inc.	FCC-TLIS N-T2-02	SEL0164	2015-08-30	2016-08-30	
7	EMI Test Receiver	Rohde & Schwarz	ESCI	SEL0022	2015-05-13	2016-05-13	
8	Coaxial Cable	SGS	N/A	SEL0025	2015-05-13	2016-05-13	
9	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2015-10-09	2016-10-09	
10	Humidity/ Temperature Indicator	Shanhai Qixiang	ZJ1-2B	SEL0103	2015-10-24	2016-10-24	
11	Barometer	Chang Chun	DYM3	SEL0088	2015-05-13	2016-05-13	



Report No.: SZEM150900604702 Page: 10 of 99

	RE in Chamber					
ltem	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy-mm-dd)	Cal.Due date (yyyy-mm-dd)
1	3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEL0017	2015-05-13	2016-05-13
2	EMI Test Receiver	Agilent Technologies	N9038A	SEL0312	2015-09-16	2016-09-16
3	EMI Test software	AUDIX	E3	SEL0050	N/A	N/A
4	BiConiLog Antenna (26-3000MHz)	ETS-LINDGREN	3142C	SEL0015	2014-11-15	2017-11-15
5	Double-ridged horn (1-18GHz)	ETS-LINDGREN	3117	SEL0006	2015-10-17	2016-10-17
6	Horn Antenna (18-26GHz)	ETS-LINDGREN	3160	SEL0076	2014-11-24	2017-11-24
7	Pre-amplifier (0.1-1300MHz)	Agilent Technologies	8447D	SEL0053	2015-05-13	2016-05-13
8	Pre-Amplifier (0.1-26.5GHz)	Compliance Directions Systems Inc.	PAP-0126	SEL0168	2015-10-17	2016-10-17
9	Coaxial cable	SGS	N/A	SEL0027	2015-05-13	2016-05-13
10	Coaxial cable	SGS	N/A	SEL0189	2015-05-13	2016-05-13
11	Coaxial cable	SGS	N/A	SEL0121	2015-05-13	2016-05-13
12	Coaxial cable	SGS	N/A	SEL0178	2015-05-13	2016-05-13
13	Band filter	Amindeon	82346	SEL0094	2015-05-13	2016-05-13
14	Barometer	Chang Chun	DYM3	SEL0088	2015-05-13	2016-05-13
15	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2015-10-09	2016-10-09
16	Humidity/ Temperature Indicator	Shanhai Qixiang	ZJ1-2B	SEL0103	2015-10-24	2016-10-24
17	Signal Generator (10M-27GHz)	Rohde & Schwarz	SMR27	SEL0067	2015-05-13	2016-05-13
18	Loop Antenna	Beijing Daze	ZN30401	SEL0203	2015-05-13	2016-05-13

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM150900604702 Page: 11 of 99

	RF connected test						
ltem	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy-mm-dd)	Cal.Due date (yyyy-mm-dd)	
1	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2015-10-09	2016-10-09	
2	Humidity/ Temperature Indicator	HYGRO	ZJ1-2B	SEL0033	2015-10-24	2016-10-24	
3	Spectrum Analyzer	Rohde & Schwarz	FSP	SEL0154	2015-10-17	2016-10-17	
4	Coaxial cable	SGS	N/A	SEL0178	2015-05-13	2016-05-13	
5	Coaxial cable	SGS	N/A	SEL0179	2015-05-13	2016-05-13	
6	Barometer	ChangChun	DYM3	SEL0088	2015-05-13	2016-05-13	
7	Signal Generator	Rohde & Schwarz	SML03	SEL0068	2015-04-25	2016-04-25	
8	POWER METER	R & S	NRVS	SEL0144	2015-10-09	2016-10-09	
9	Attenuator	Beijin feihang taida	TST-2-6dB	SEL0205	2015-04-25	2016-04-25	





Report No.: SZEM150900604702 Page: 12 of 99

6 Test results and Measurement Data

6.1 Antenna Requirement

Standard requirement: 47 CFR Part 15C Section 15.203 /247(c)


15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.



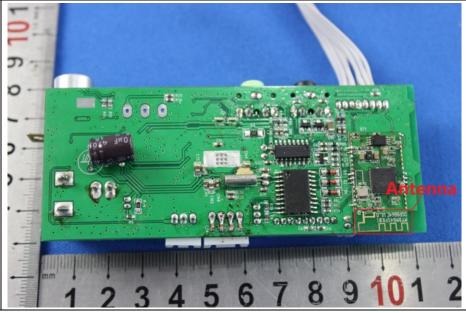

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 0dBi.



Report No.: SZEM150900604702 Page: 13 of 99

Test Requirement:	47 CFR Part 15C Section 15.207			
Test Method:	ANSI C63.10: 2009			
Test Frequency Range	150kHz to 30MHz			
Limit:		Limit (d	lBuV)	
	Frequency range (MHz)	Quasi-peak	Average	
	0.15-0.5	66 to 56*	56 to 46*	
	0.5-5	56	46	
	5-30	60	50	
	* Decreases with the logarithm	n of the frequency.		
Test Procedure:	 5-30 60 50 * Decreases with the logarithm of the frequency. 1) The mains terminal disturbance voltage test was conducted in a shielder room. 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50Ω/50µH + 5Ω linea impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded. 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2. 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to 		near ne was ar ne he of 2.	

6.2 Conducted Emissions



Report No.: SZEM150900604702 Page: 14 of 99

Test Setup:	Shielding Room Test Receiver Test Receiver Test Receiver LISN1 LISN1 Ground Reference Plane
Exploratory Test Mode:	Non-hopping transmitting mode with all kind of modulation and all kind of data type at the lowest, middle, high channel. Transmitting mode.
Final Test Mode:	Through Pre-scan, find the DH1 of data type and GFSK modulation at the lowest channel is the worst case. Transmitting mode Only the worst case is recorded in the report.
Instruments Used:	Refer to section 5.10 for details
Test Results:	Pass




Report No.: SZEM150900604702 Page: 15 of 99

Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.


Live line:

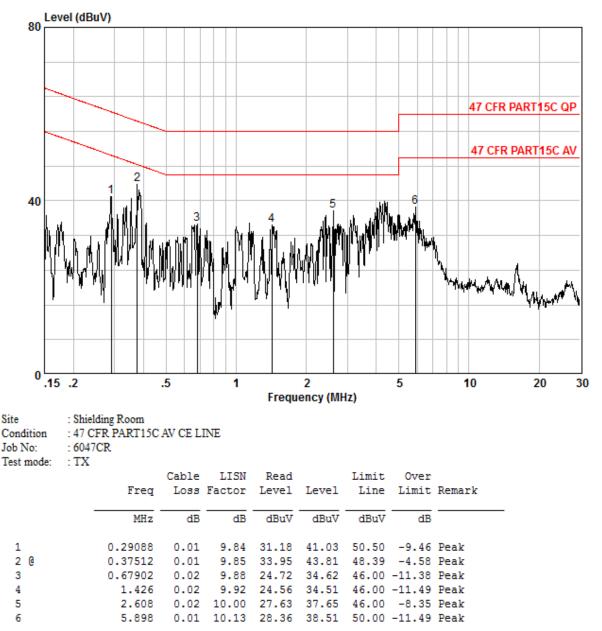



Report No.: SZEM150900604702 Page: 16 of 99

Neutral line:

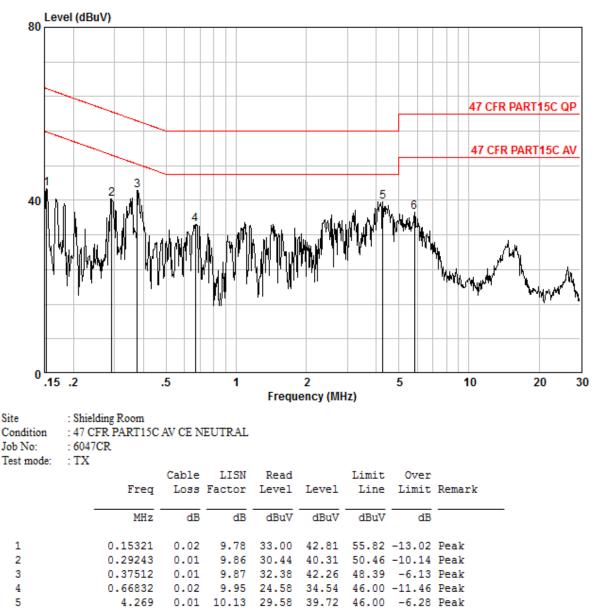

Notes:

5.836

0.01

6

The following Quasi-Peak and Average measurements were performed on the EUT:
 Final Test Level = Receiver Reading + LISN Factor + Cable Loss.

37.37

50.00 -12.63 Peak

10.13 27.23



Report No.: SZEM150900604702 Page: 17 of 99

6.3 Conducted Peak Output Power

Test Requirement:	47 CFR Part 15C Section 15.247 (b)(1)	
Test Method:	ANSI C63.10:2009	
Test Setup:	Spectrum Analyzer Image: Ima	
Limit:	30dBm	
Exploratory Test Mode:	Non-hopping transmitting with all kind of modulation and all kind of data type	
Final Test Mode:	Through Pre-scan, find the DH1 of data type is the worst case of GFSK modulation type, 2-DH1 of data type is the worst case of $\pi/4DQPSK$ modulation type, 3-DH1 of data type is the worst case of 8DPSK modulation type.	
Instruments Used:	Refer to section 5.10 for details	
Test Results:	Pass	

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM150900604702 Page: 18 of 99

Measurement Data

GFSK mode				
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result	
Lowest	-2.62	30.00	Pass	
Middle	-3.01	30.00	Pass	
Highest	-3.56	30.00	Pass	
	π/4DQPSK m	ode		
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result	
Lowest	-3.07	30.00	Pass	
Middle	-3.49	30.00	Pass	
Highest	-4.13	30.00	Pass	
8DPSK mode				
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result	
Lowest	-2.90	30.00	Pass	
Middle	-3.41	30.00	Pass	
Highest	-4.12	30.00	Pass	




Report No.: SZEM150900604702 Page: 19 of 99

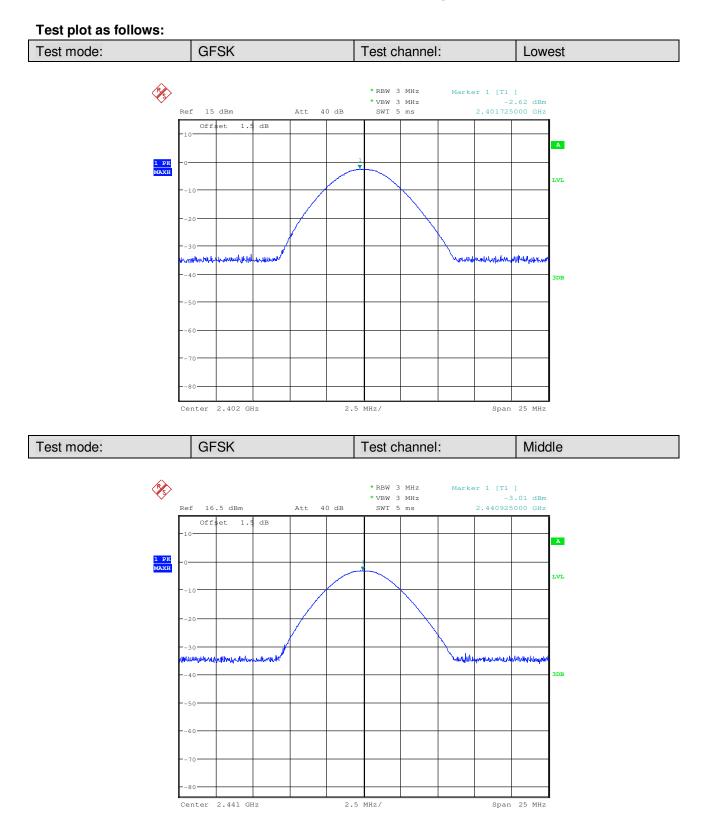




Report No.: SZEM150900604702 Page: 20 of 99

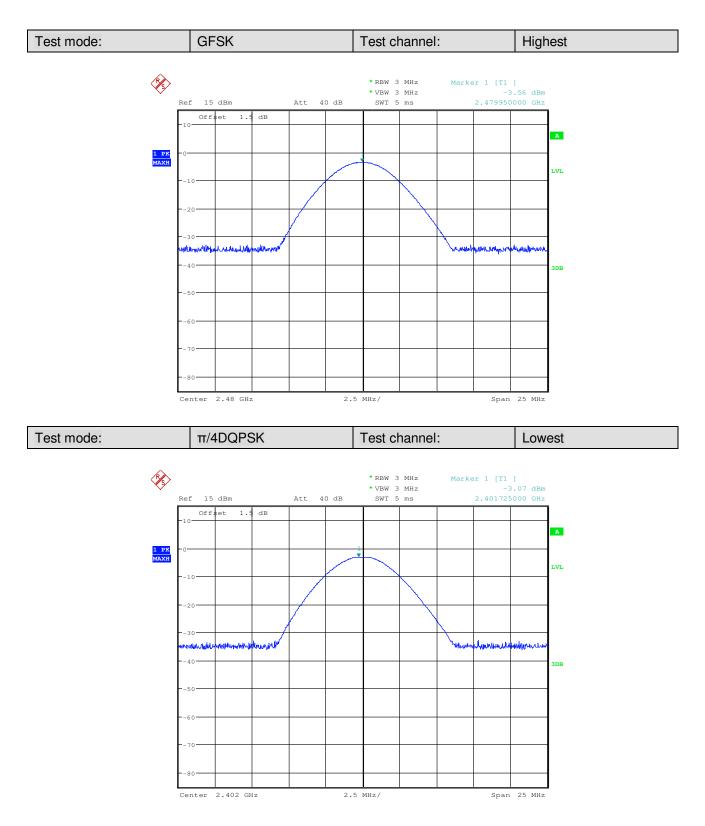




Report No.: SZEM150900604702 Page: 21 of 99

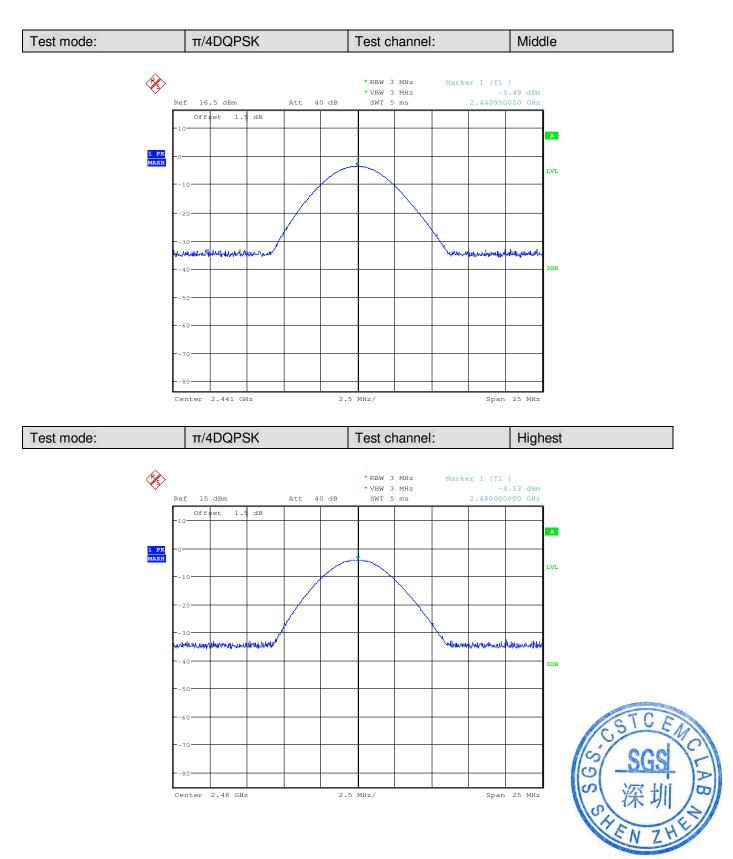




Report No.: SZEM150900604702 Page: 22 of 99

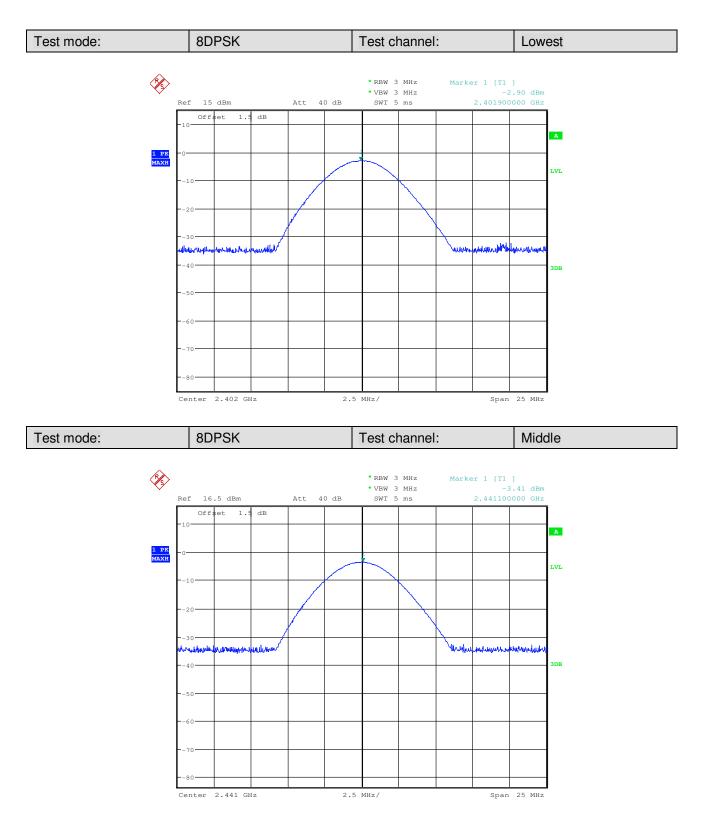



Report No.: SZEM150900604702 Page: 23 of 99

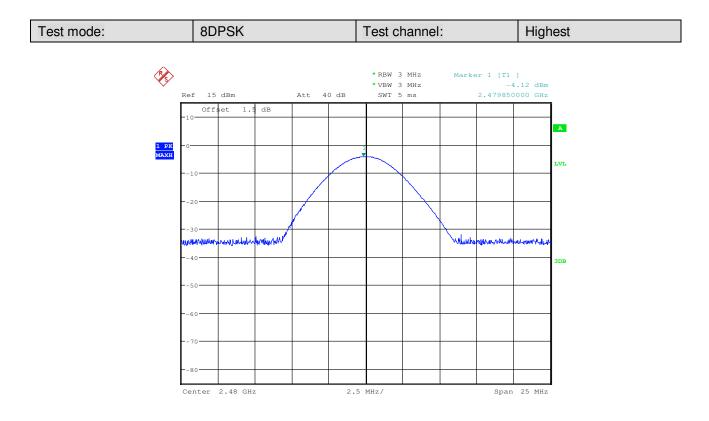



Report No.: SZEM150900604702 Page: 24 of 99

6.4 20dB Occupy Bandwidth


Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1)	
Test Method:	ANSI C63.10:2009	
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane	
Limit:	NA	
Exploratory Test Mode:	Non-hopping transmitting with all kind of modulation and all kind of data type	
Final Test Mode:	Through Pre-scan, find the DH1 of data type is the worst case of GFSK modulation type, 2-DH1 of data type is the worst case of $\pi/4DQPSK$ modulation type, 3-DH1 of data type is the worst case of 8DPSK modulation type.	
Instruments Used:	Refer to section 5.10 for details	
Test Results:	Pass	

Measurement Data

Test channel	20dB Occupy Bandwidth (kHz)			
	GFSK	π/4DQPSK	8DPSK	
Lowest	883.308	1264.423	1221.153	
Middle	870.192	1254.807	1225.615	
Highest	875.000	1245.192	1221.000	




Report No.: SZEM150900604702 Page: 25 of 99

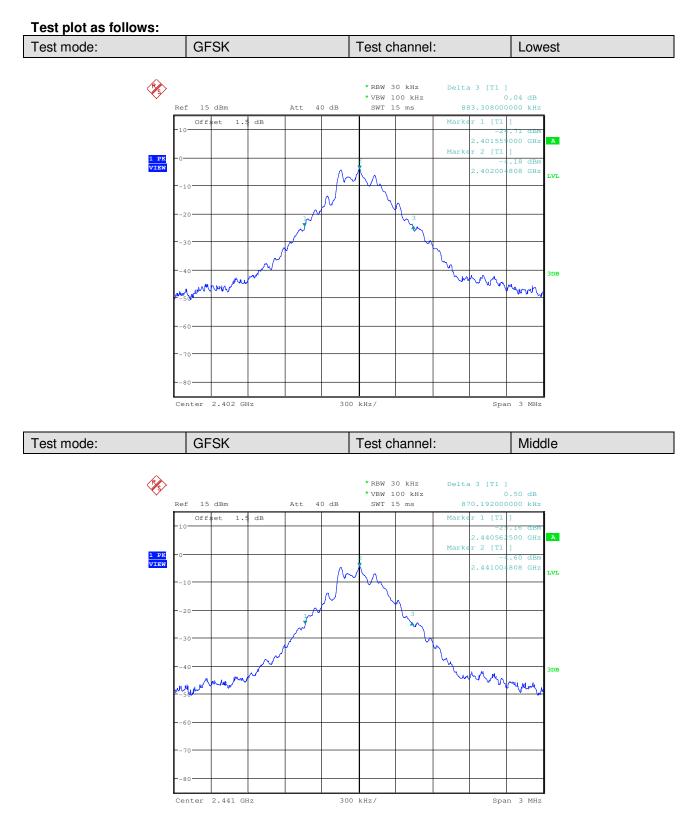




Report No.: SZEM150900604702 Page: 26 of 99

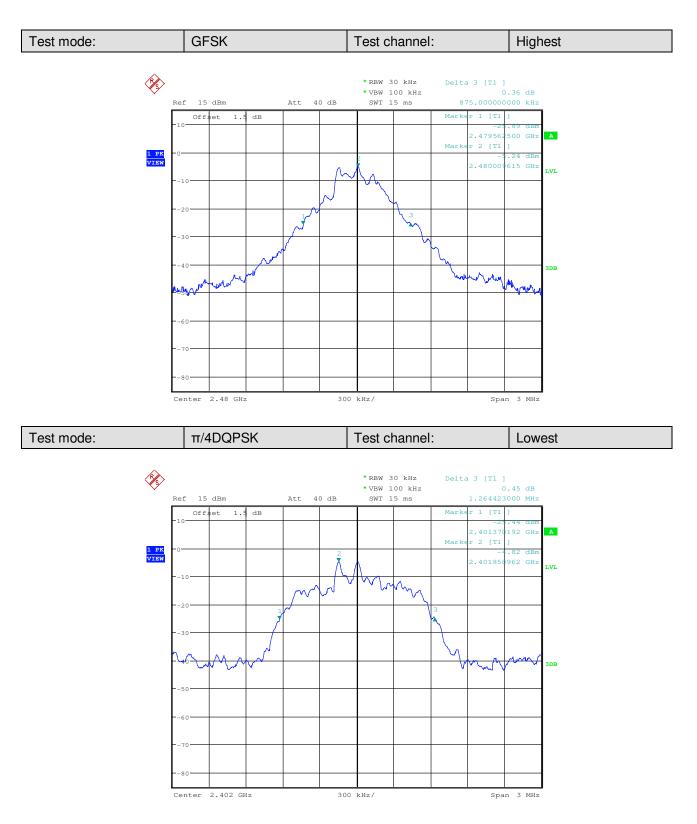




Report No.: SZEM150900604702 Page: 27 of 99

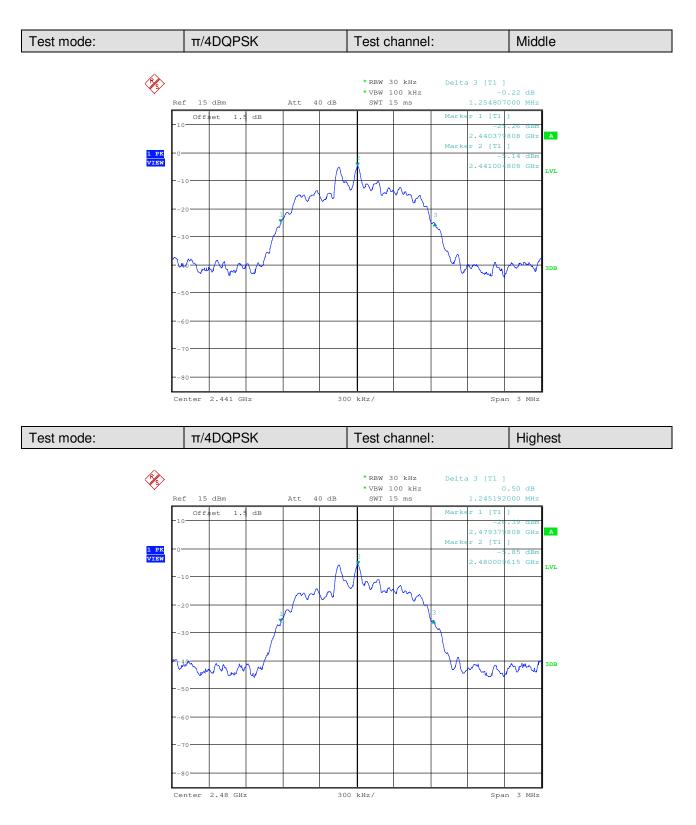




Report No.: SZEM150900604702 Page: 28 of 99

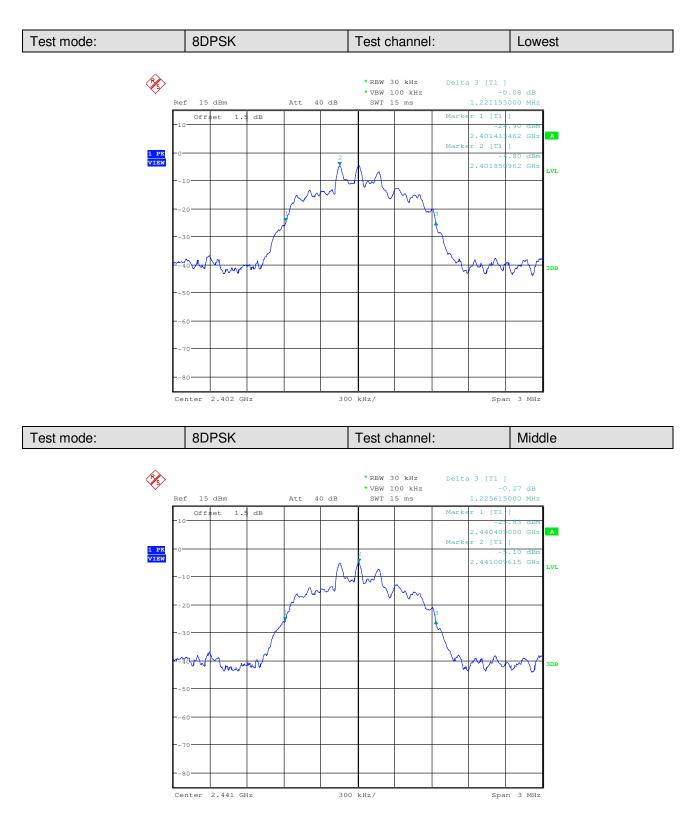



Report No.: SZEM150900604702 Page: 29 of 99

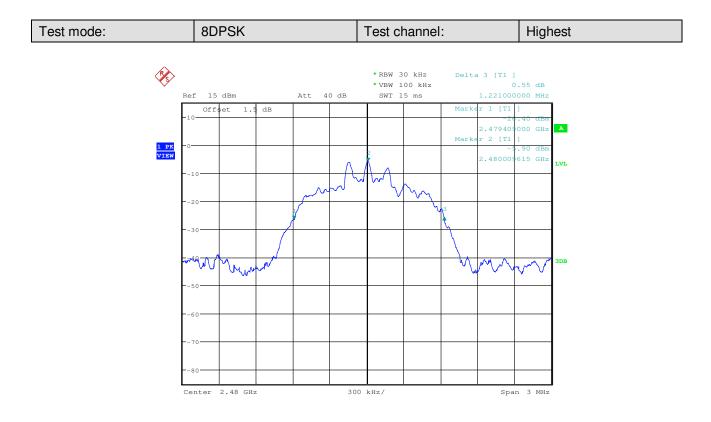



Report No.: SZEM150900604702 Page: 30 of 99

6.5 Carrier Frequencies Separation

Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1)		
Test Method:	ANSI C63.10:2009		
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane		
Limit:	2/3 of the 20dB bandwidth		
	Remark: the transmission power is less than 0.125W.		
Exploratory Test Mode:	Hopping transmitting with all kind of modulation and all kind of data type		
Final Test Mode:	Through Pre-scan, find the DH1 of data type is the worst case of GFSK modulation type, 2-DH1 of data type is the worst case of $\pi/4DQPSK$ modulation type, 3-DH1 of data type is the worst case of 8DPSK modulation type.		
Instruments Used:	Refer to section 5.10 for details		
Test Results:	Pass		

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Measurement Data

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM150900604702 Page: 31 of 99

GFSK mode						
Test channel	Carrier Frequencies Separation (kHz)	Limit (kHz)	Result			
Middle	1000.900	≥588.872	Pass			
	π/4DQPSK mode					
Test channel	Carrier Frequencies Separation (kHz)	Limit (kHz)	Result			
Middle	1000.000	≥842.949	Pass			
8DPSK mode						
Test channel	Carrier Frequencies Separation (kHz)	Limit (kHz)	Result			
Middle	1000.000	≥817.077	Pass			


Note: According to section 6.4,

Mode	20dB bandwidth (kHz) (worse case)	Limit (kHz) (Carrier Frequencies Separation)
GFSK 883.308		588.872
π/4DQPSK	1264.423	842.949
8DPSK	1225.615	817.077






Report No.: SZEM150900604702 Page: 32 of 99

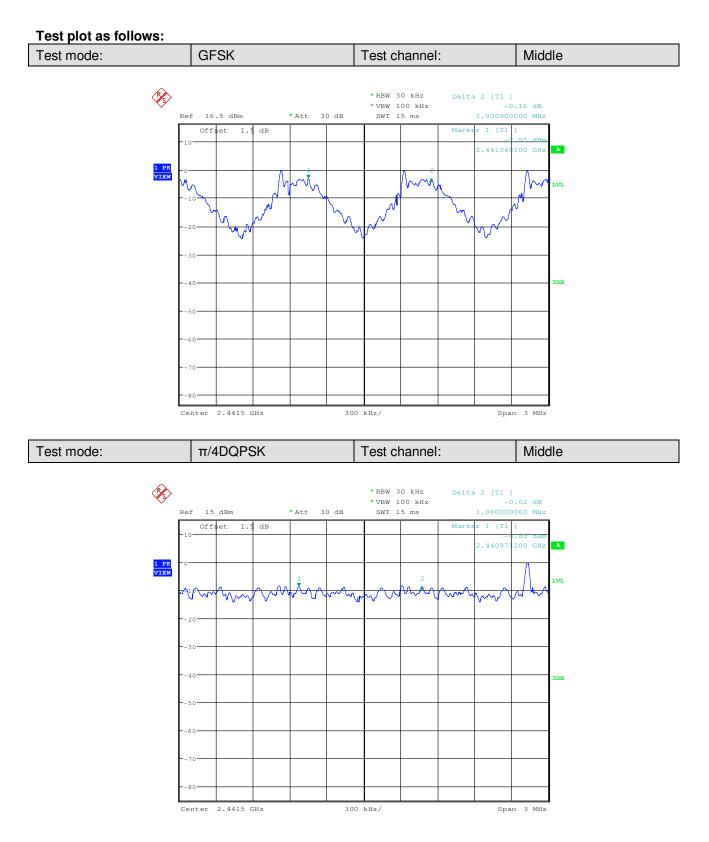



Report No.: SZEM150900604702 Page: 33 of 99

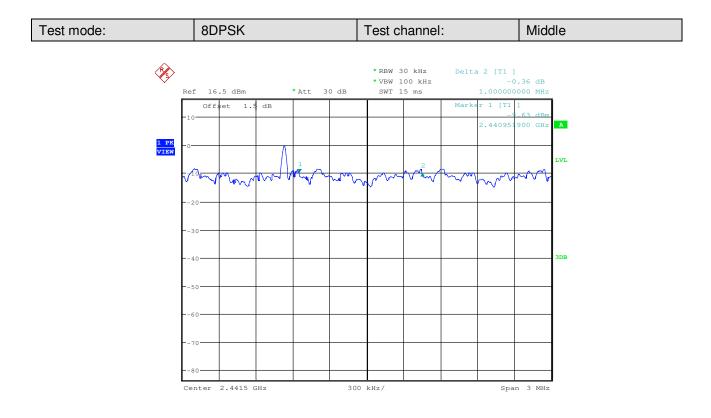



Report No.: SZEM150900604702 Page: 34 of 99

47 CFR Part 15C Section 15.247 (a)(1) **Test Requirement:** ANSI C63.10:2009 Test Method: Test Setup: Spectrum Analyzer E.U.T Non-Conducted Table **Ground Reference Plane** At least 15 channels Limit: Test Mode: Hopping transmitting with all kind of modulation Instruments Used: Refer to section 5.10 for details **Test Results:** Pass

6.6 Hopping Channel Number


Measurement Data

Mode	Hopping channel numbers	Limit
GFSK	79	≥15
π/4DQPSK	79	≥15
8DPSK	79	≥15

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM150900604702 Page: 35 of 99

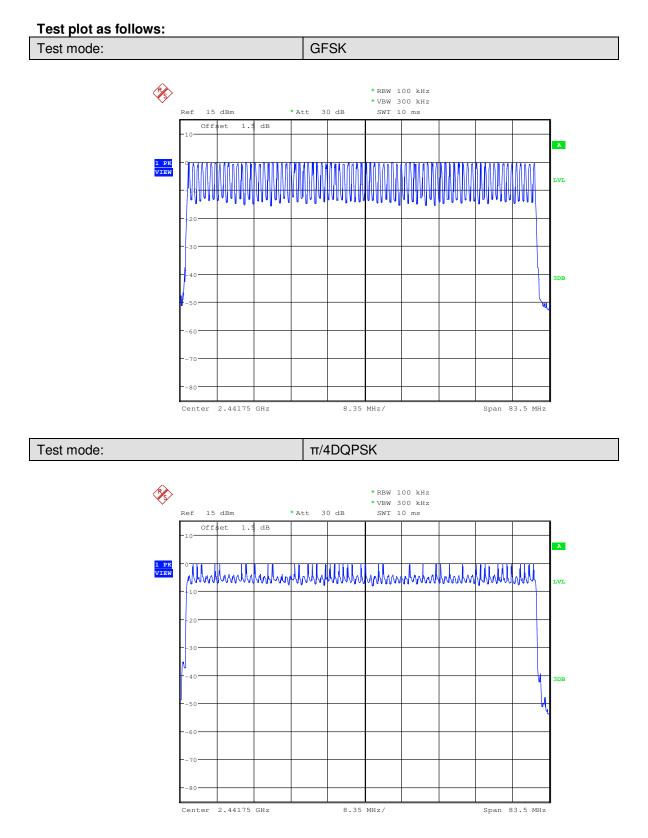



Report No.: SZEM150900604702 Page: 36 of 99

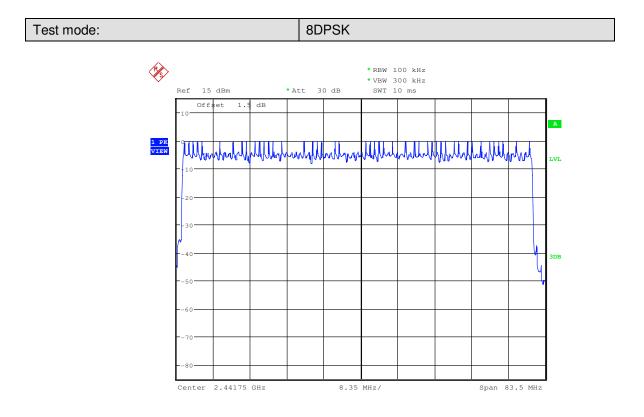

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM150900604702 Page: 37 of 99

6.7 Dwell Time

Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1)	
Test Method:	ANSI C63.10:2009	
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table	
	Ground Reference Plane	
Instruments Used:	Refer to section 5.10 for details	
Test Mode:	Hopping transmitting with all kind of modulation and all kind of data type.	
Limit:	0.4 Second	
Test Results:	Pass	

Measurement Data

Mode	Packet	Dwell time (second)	Limit (second)
GFSK	DH1	0.126	≤0.4
	DH3	0.264	≤0.4
	DH5	0.319	≤0.4
π/4DQPSK	2-DH1	0.131	≤0.4
	2-DH3	0.267	≤0.4
	2-DH5	0.321	≤0.4
8DPSK	3-DH1	0.131	≤0.4
	3-DH3	0.265	≤0.4
	3-DH5	0.320	≤0.4



Report No.: SZEM150900604702 Page: 38 of 99

Remark:


The test period: T= 0.4 Second/Channel x 79 Channel = 31.6 s On (ms)*total number=dwell time (ms) The middle channel (2441MHz), as below: DH1 time slot=0.393 (ms)*total number=125.760 (ms) DH3 time slot=1.651(ms)* total number = 264.160 (ms) DH5 time slot=2.901 (ms)* total number = 319.110 (ms) 2-DH1 time slot=0.409(ms)*total number=130.880 (ms) 2-DH3 time slot=1.667(ms)* total number = 266.720 (ms) 2-DH5 time slot=2.917 (ms)* total number = 320.870 (ms) 3-DH1 time slot=0.409 (ms)*total number=130.880 (ms) 3-DH3 time slot=1.659 (ms)* total number = 265.440 (ms) 3-DH5 time slot=2.909 (ms)* total number = 319.990 (ms)

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM150900604702 Page: 39 of 99

Test plot as follows:

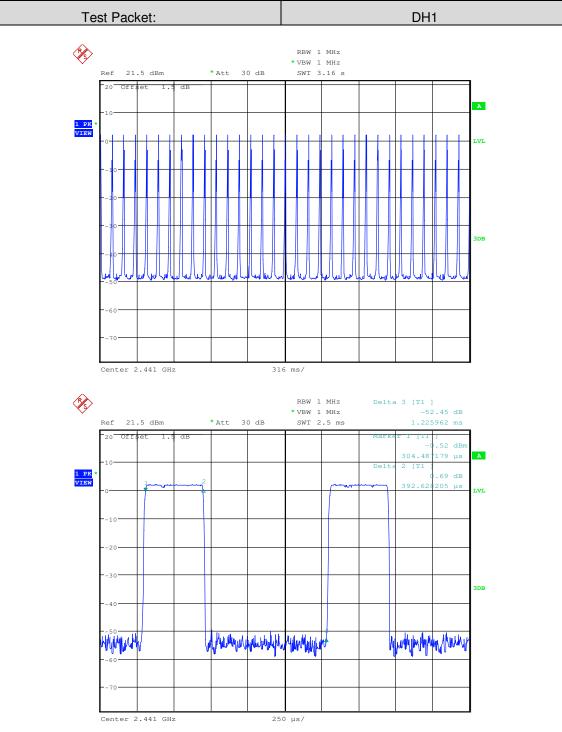




Report No.: SZEM150900604702 Page: 40 of 99

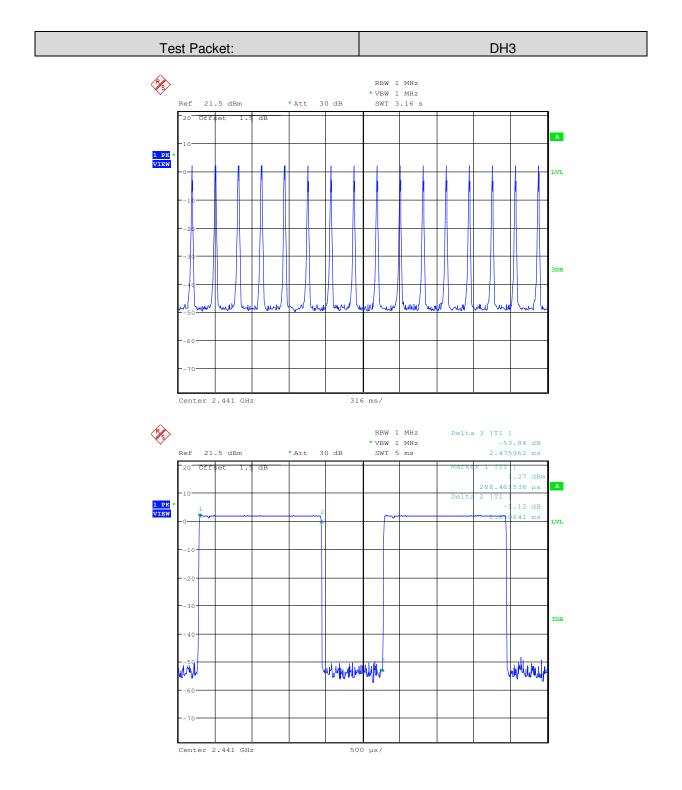




Report No.: SZEM150900604702 Page: 41 of 99

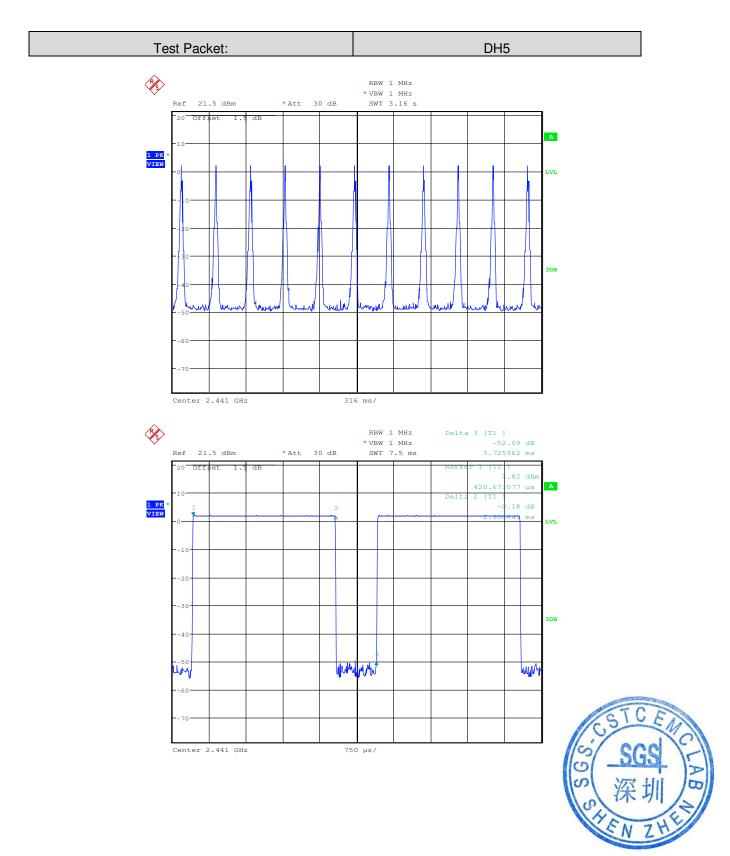




Report No.: SZEM150900604702 Page: 42 of 99

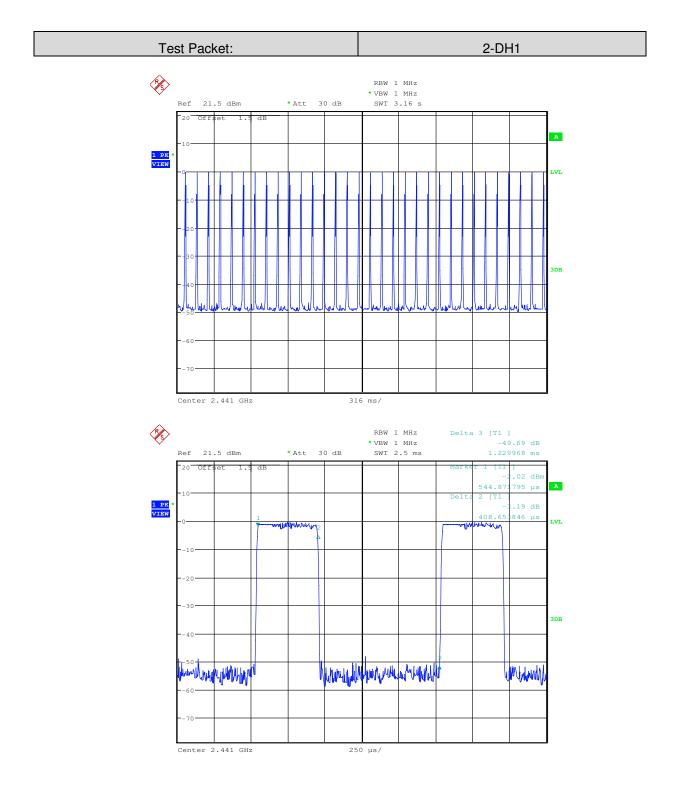




Report No.: SZEM150900604702 Page: 43 of 99

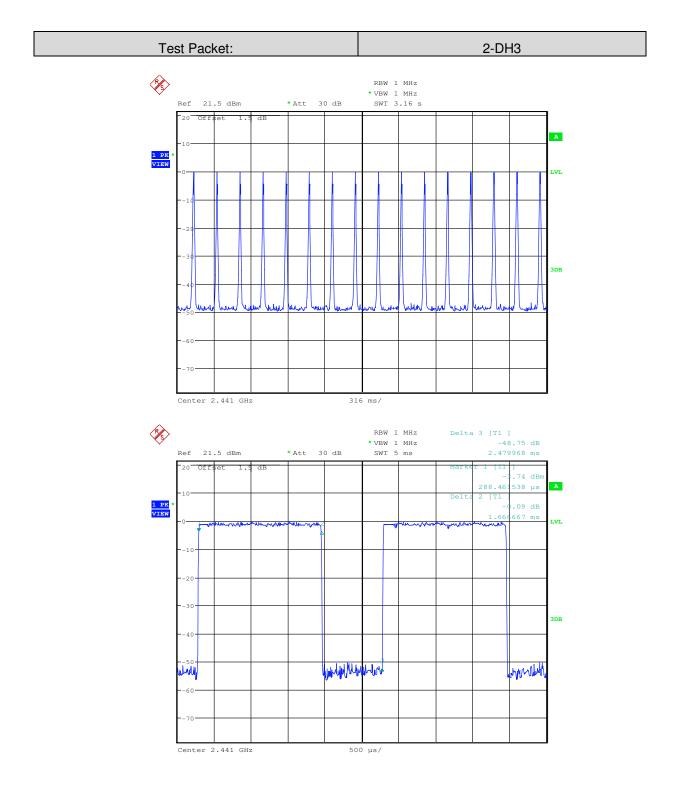




Report No.: SZEM150900604702 Page: 44 of 99

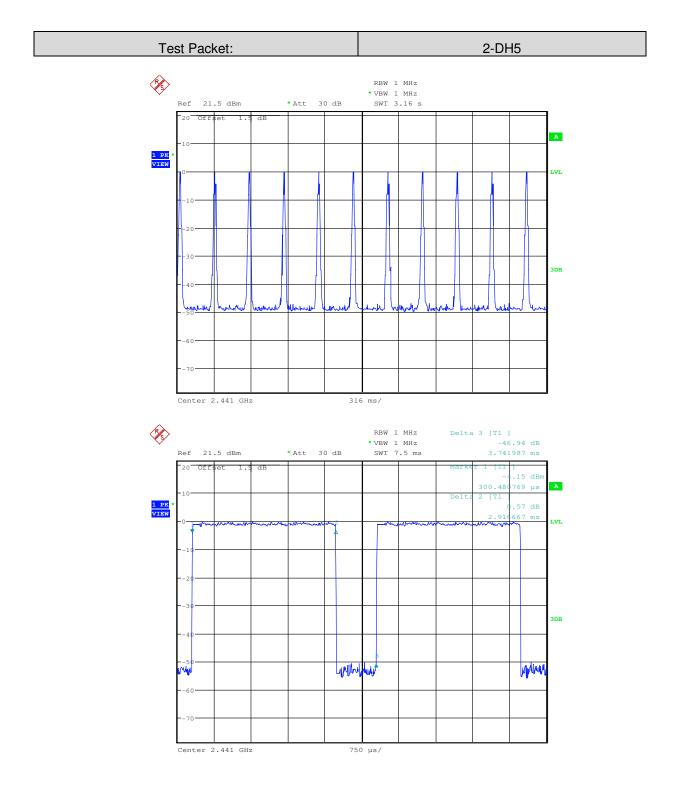




Report No.: SZEM150900604702 Page: 45 of 99

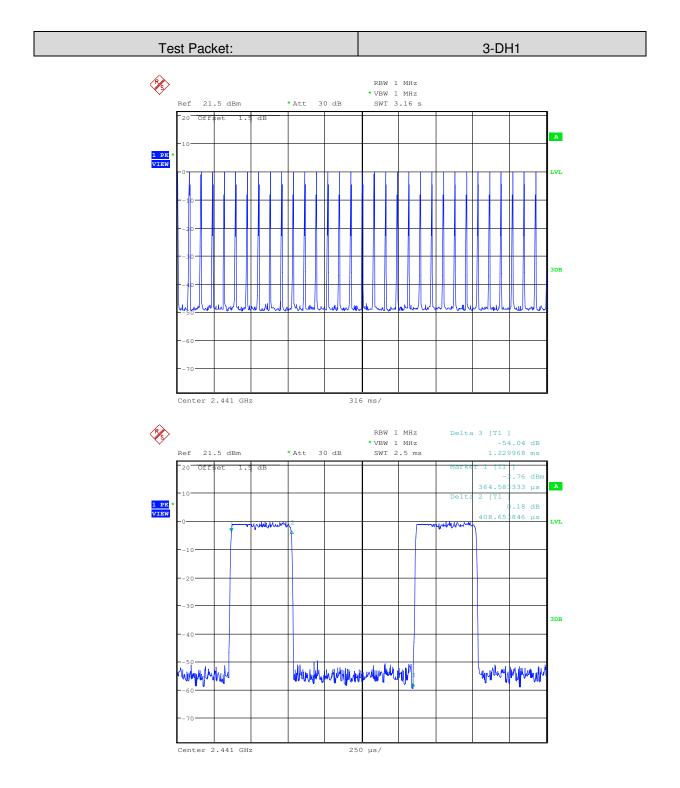




Report No.: SZEM150900604702 Page: 46 of 99

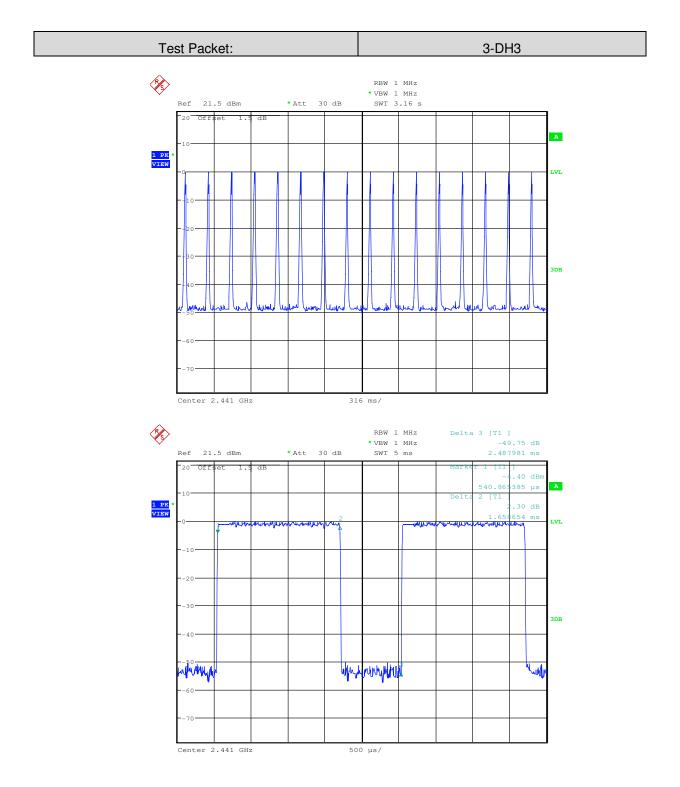



Report No.: SZEM150900604702 Page: 47 of 99

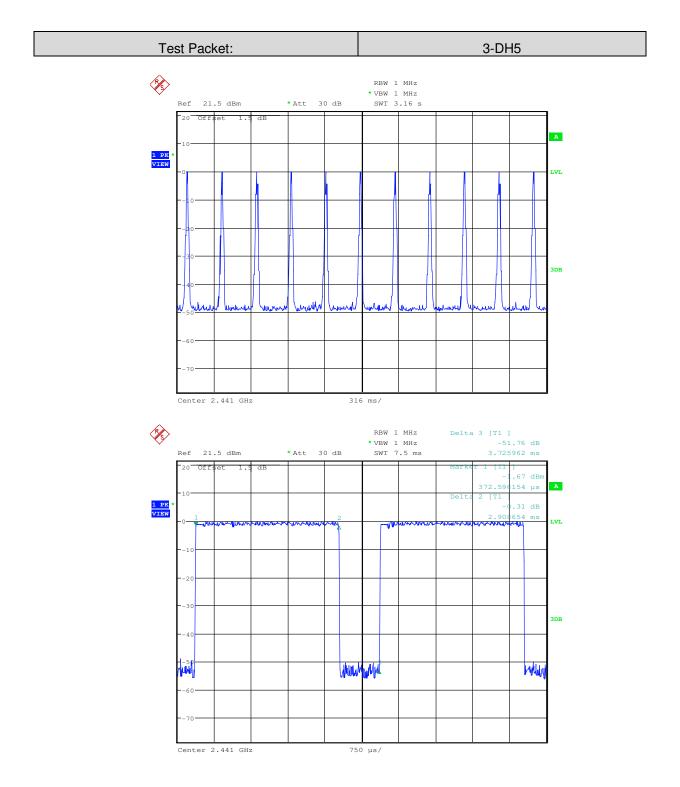



Report No.: SZEM150900604702 Page: 48 of 99


Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10:2009
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane Remark:
	Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Exploratory Test Mode:	Hopping and Non-hopping transmitting with all kind of modulation and all kind of data type
Final Test Mode:	Through Pre-scan, find the DH1 of data type is the worst case of GFSK modulation type, 2-DH1 of data type is the worst case of π /4DQPSK modulation type, 3-DH1 of data type is the worst case of 8DPSK modulation type.
Instruments Used:	Refer to section 5.10 for details
Test Results:	Pass

6.8 Band-edge for RF Conducted Emissions

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM150900604702 Page: 49 of 99

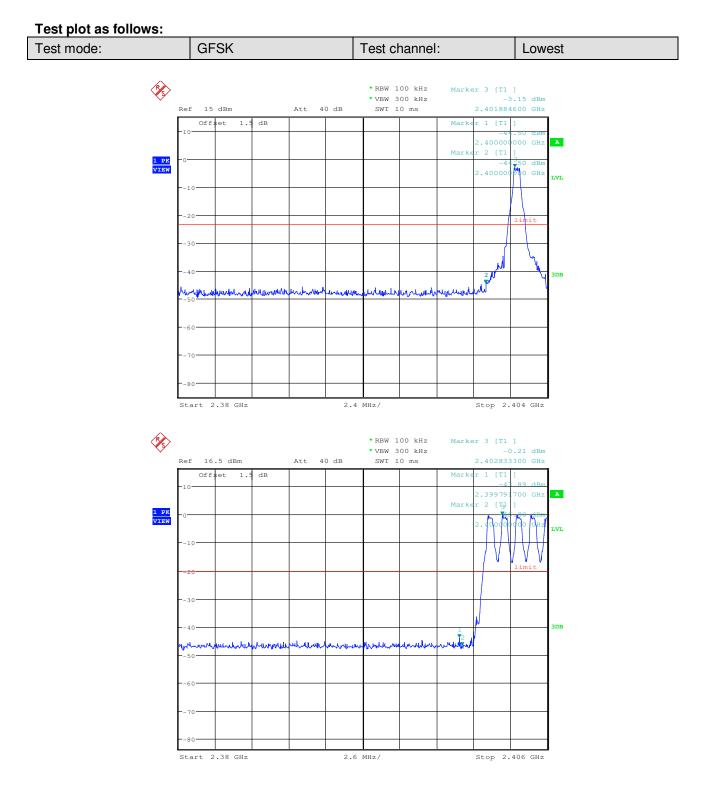




Report No.: SZEM150900604702 Page: 50 of 99

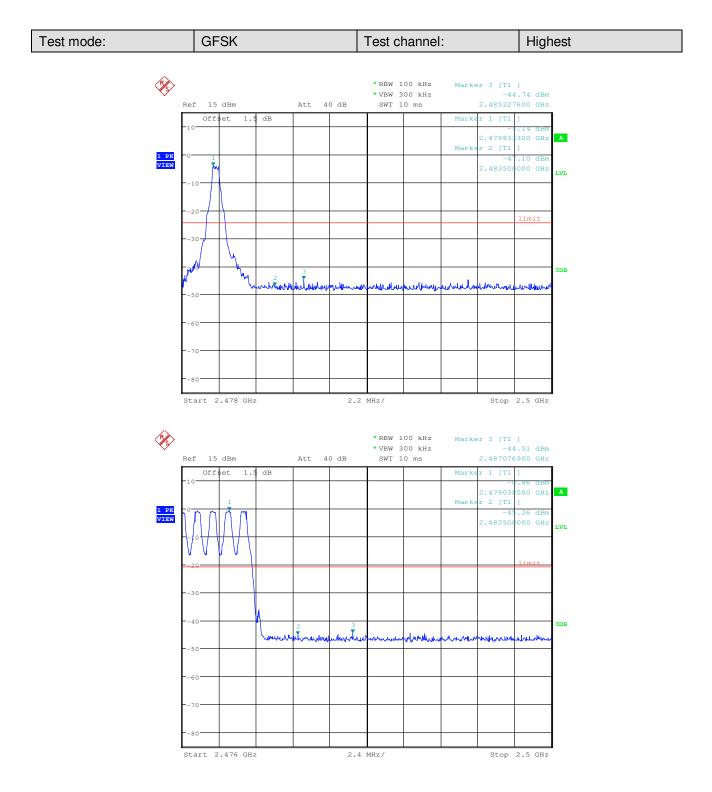




Report No.: SZEM150900604702 Page: 51 of 99

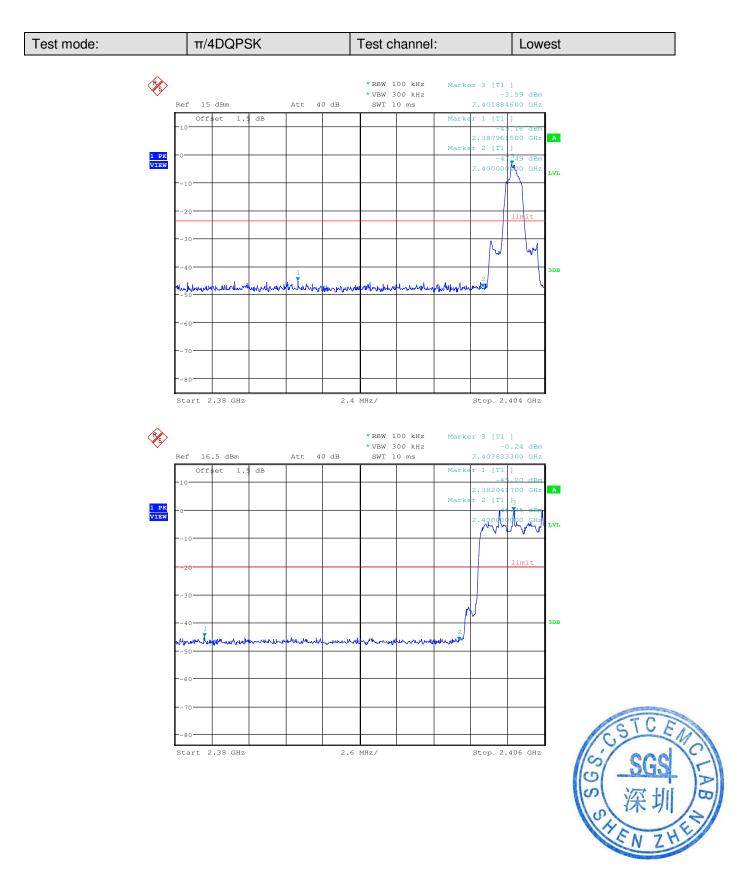




Report No.: SZEM150900604702 Page: 52 of 99

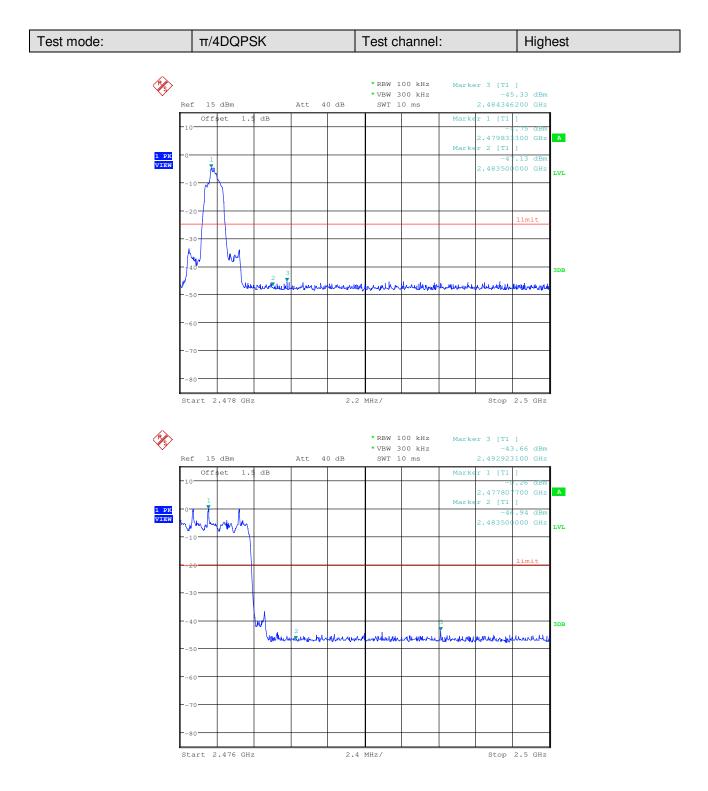




Report No.: SZEM150900604702 Page: 53 of 99

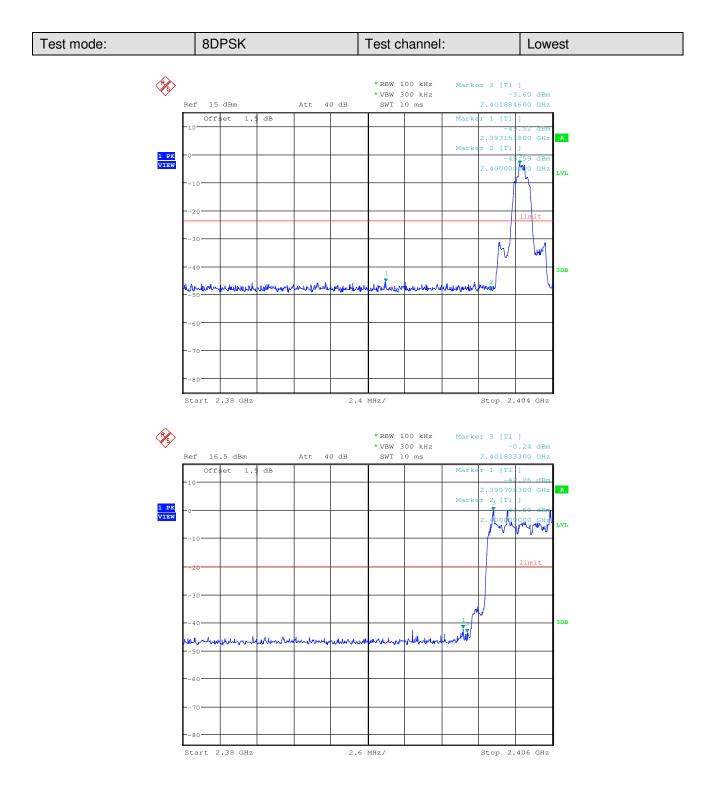



Report No.: SZEM150900604702 Page: 54 of 99

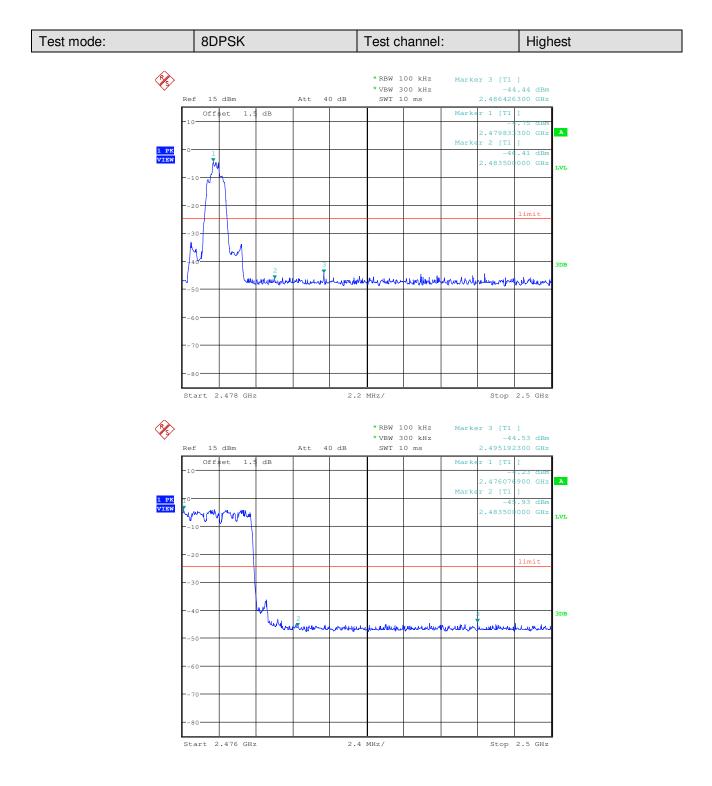



Report No.: SZEM150900604702 Page: 55 of 99


6.9 Spurious RF Conducted Emissions

Test Requirement:	47 CFR Part 15C Section 15.247 (d)	
Test Method:	ANSI C63.10:2009	
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane	
	Remark: Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.	
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.	
Exploratory Test Mode:	Non-hopping transmitting with all kind of modulation and all kind of data type	
Final Test Mode:	Through Pre-scan, find the DH1 of data type is the worst case of GFSK modulation type, 2-DH1 of data type is the worst case of $\pi/4DQPSK$ modulation type, 3-DH1 of data type is the worst case of 8DPSK modulation type.	
Instruments Used:	Refer to section 5.10 for details	
Test Results:	Pass	

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM150900604702 Page: 56 of 99

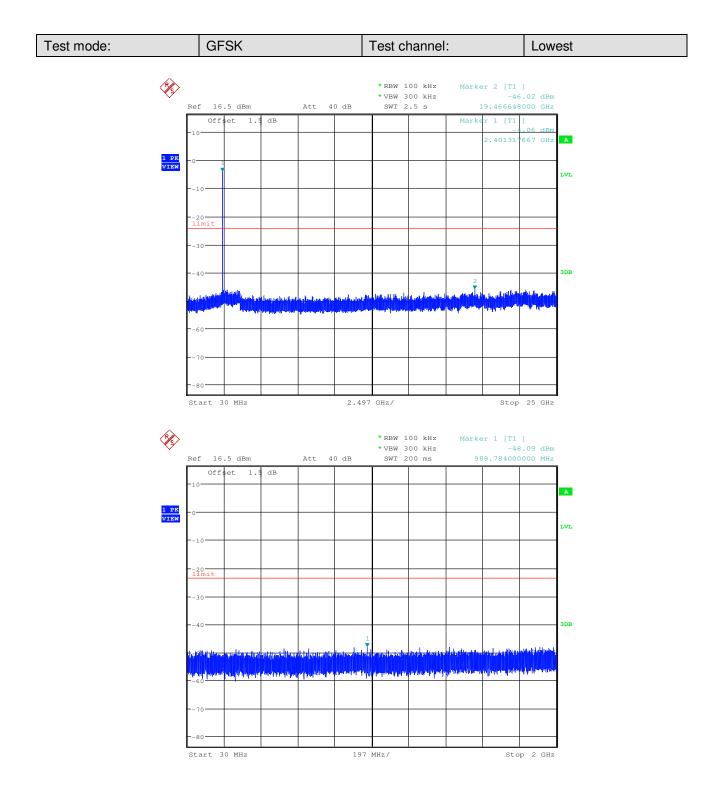

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM150900604702 Page: 57 of 99

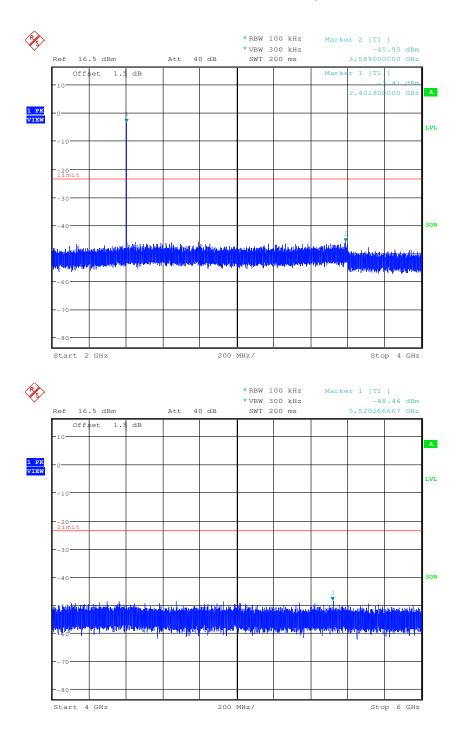




Report No.: SZEM150900604702 Page: 58 of 99

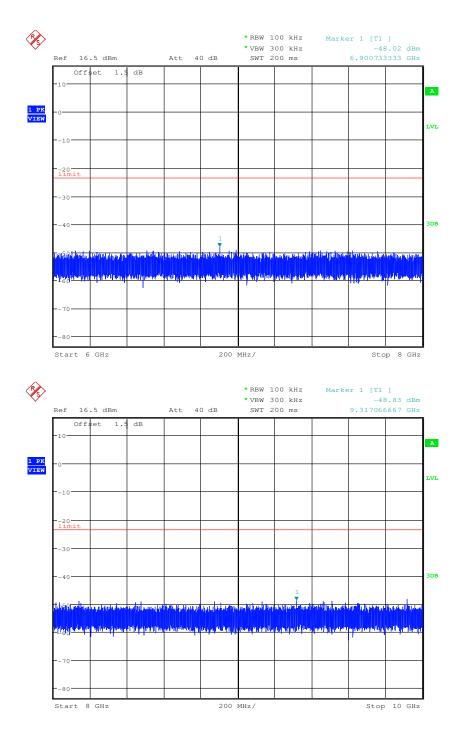




Report No.: SZEM150900604702 Page: 59 of 99

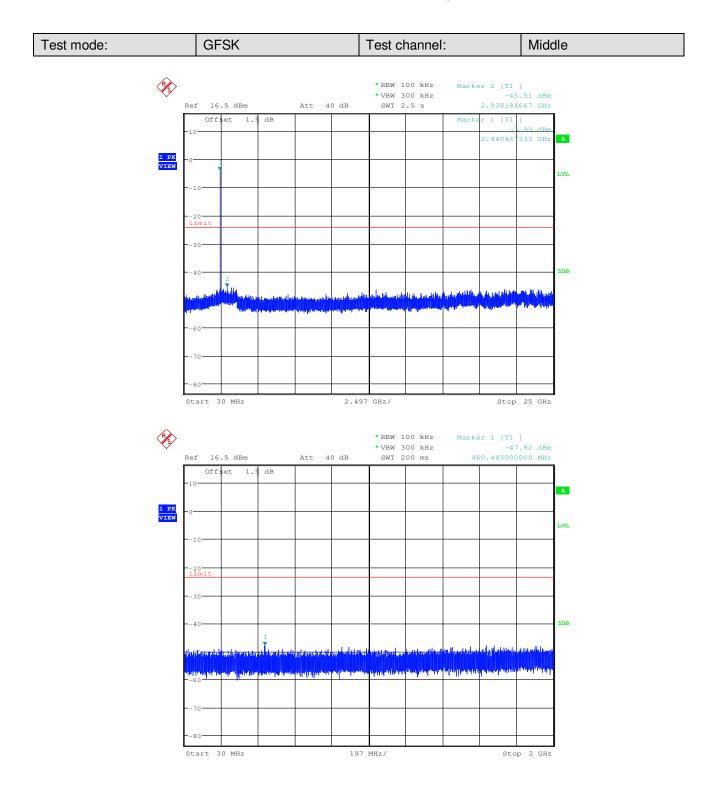




Report No.: SZEM150900604702 Page: 60 of 99

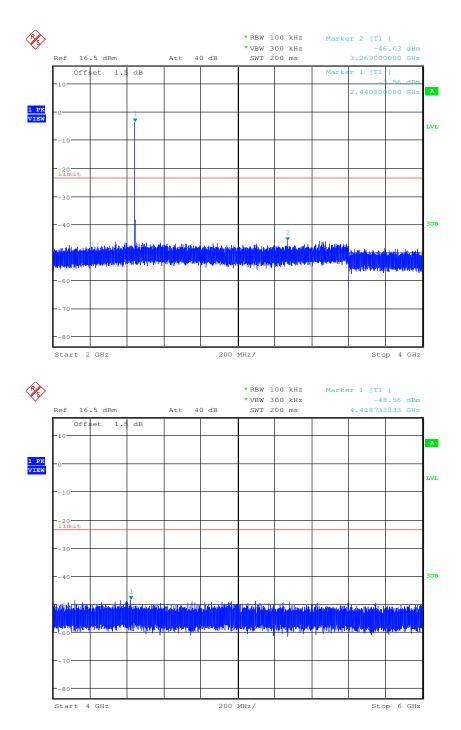




Report No.: SZEM150900604702 Page: 61 of 99

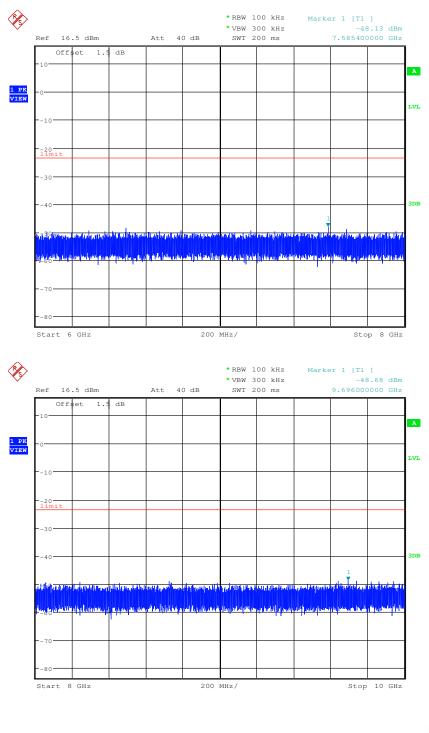






Report No.: SZEM150900604702 Page: 62 of 99

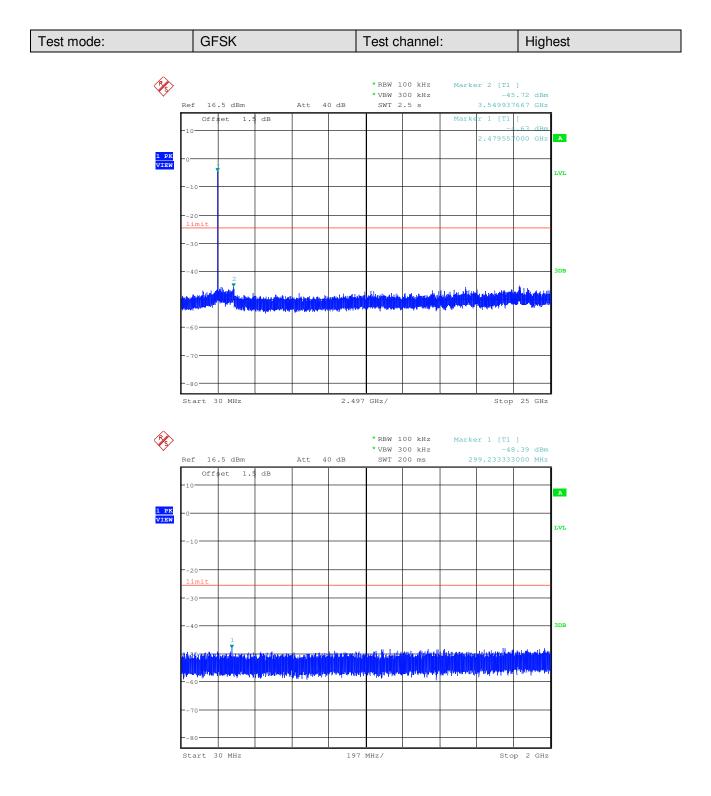




Report No.: SZEM150900604702 Page: 63 of 99

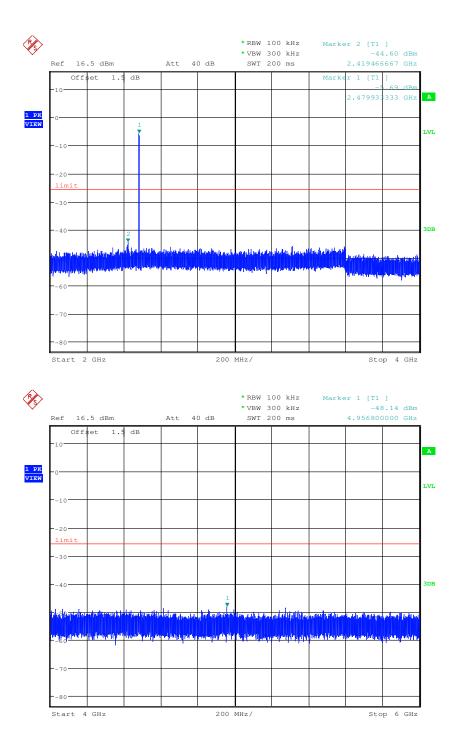




Report No.: SZEM150900604702 Page: 64 of 99

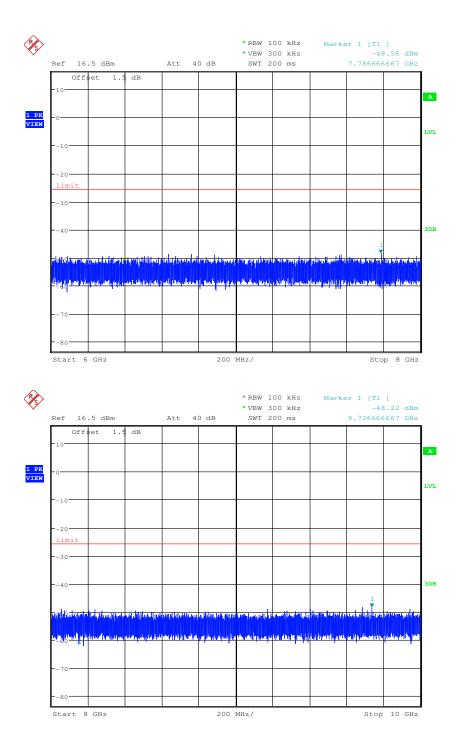




Report No.: SZEM150900604702 Page: 65 of 99

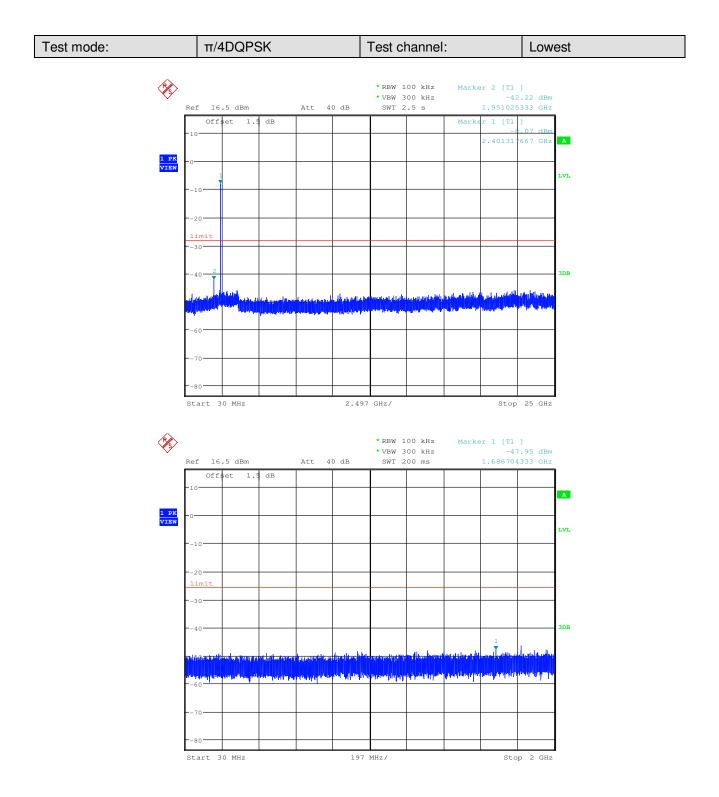

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM150900604702 Page: 66 of 99

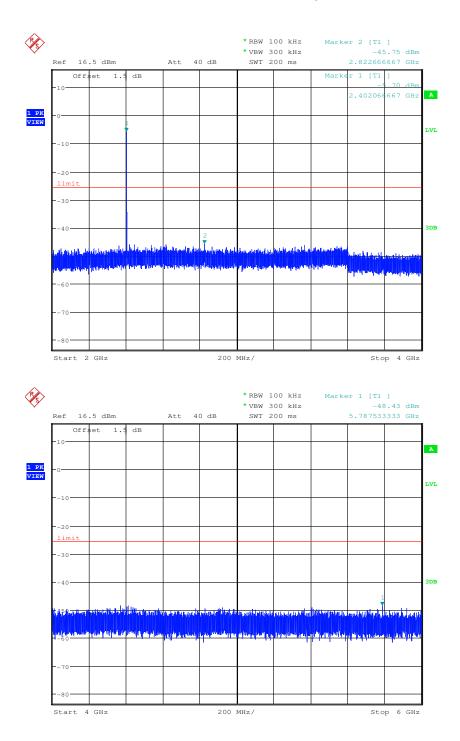




Report No.: SZEM150900604702 Page: 67 of 99

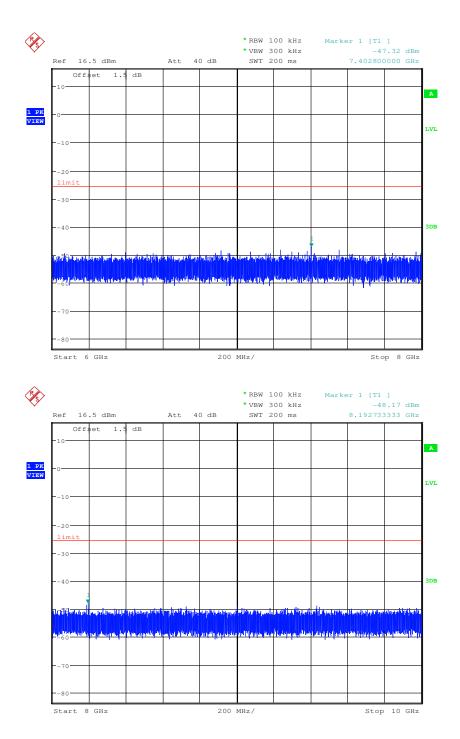




Report No.: SZEM150900604702 Page: 68 of 99

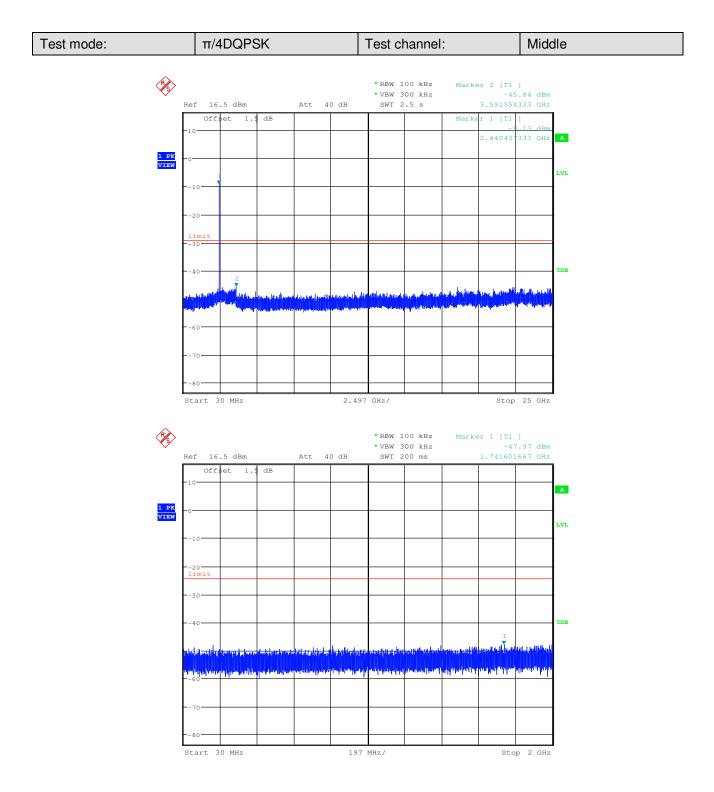




Report No.: SZEM150900604702 Page: 69 of 99

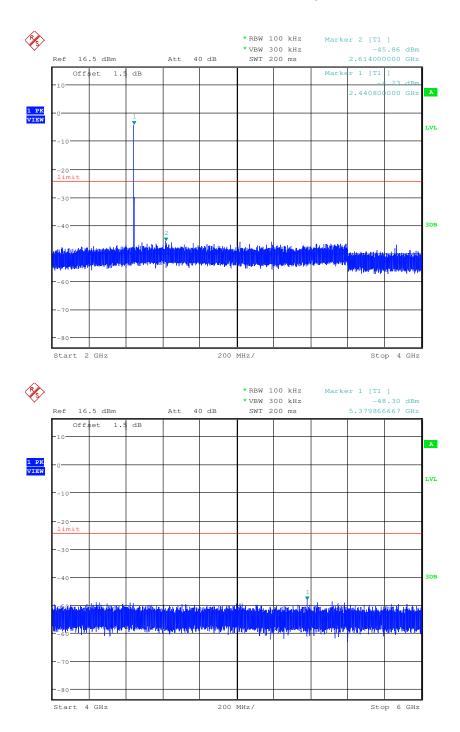




Report No.: SZEM150900604702 Page: 70 of 99

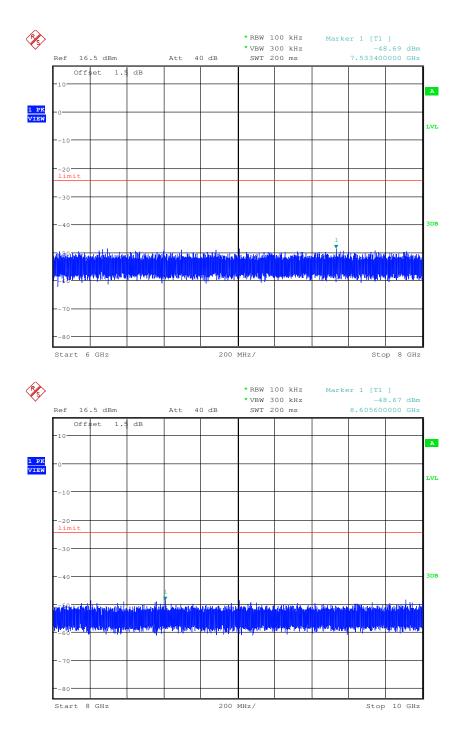




Report No.: SZEM150900604702 Page: 71 of 99

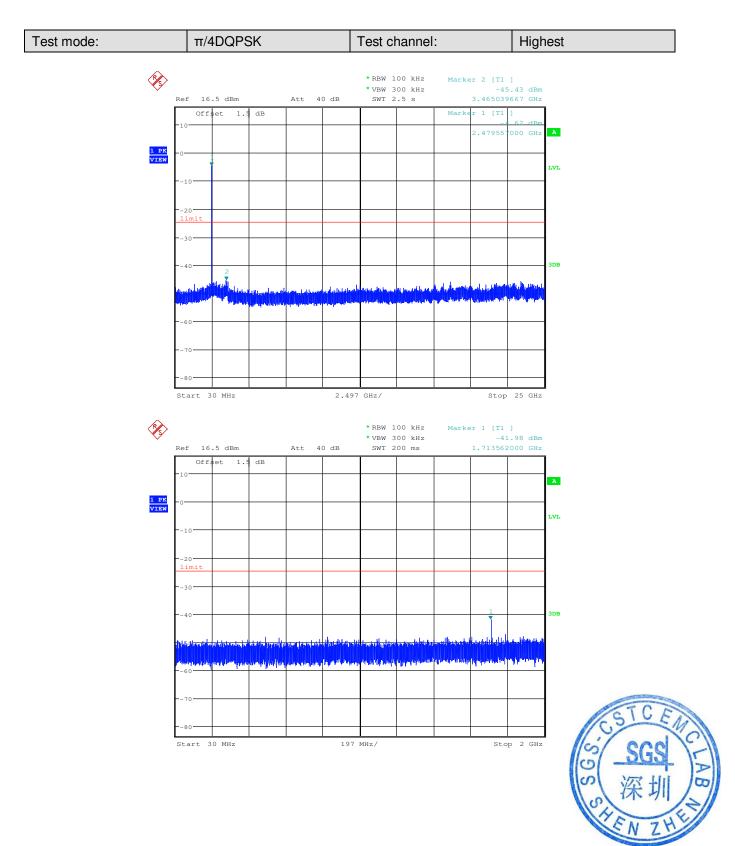




Report No.: SZEM150900604702 Page: 72 of 99

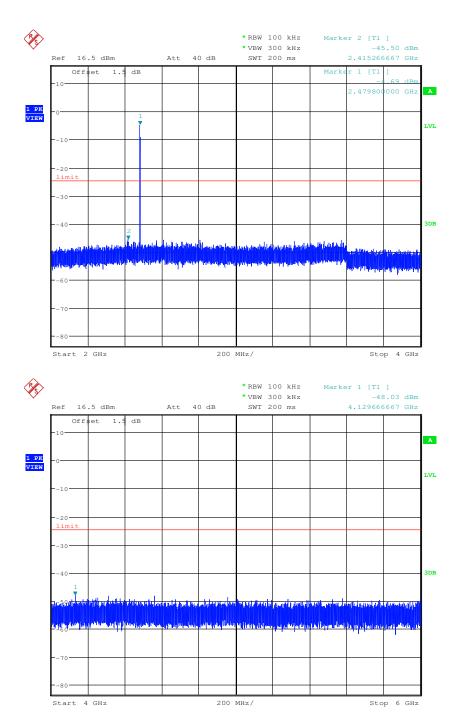




Report No.: SZEM150900604702 Page: 73 of 99

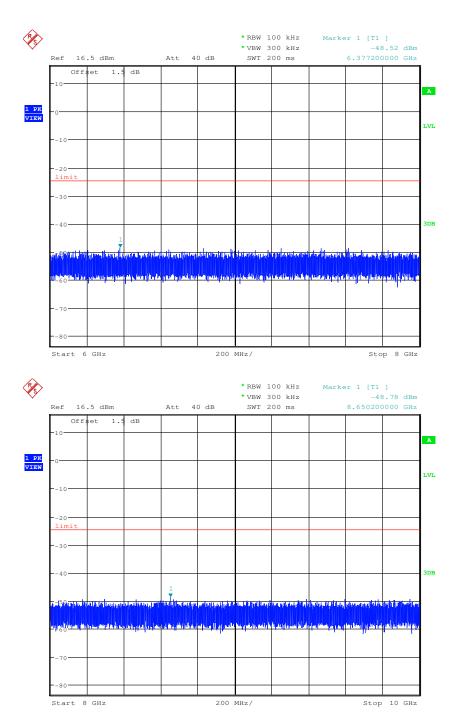




Report No.: SZEM150900604702 Page: 74 of 99

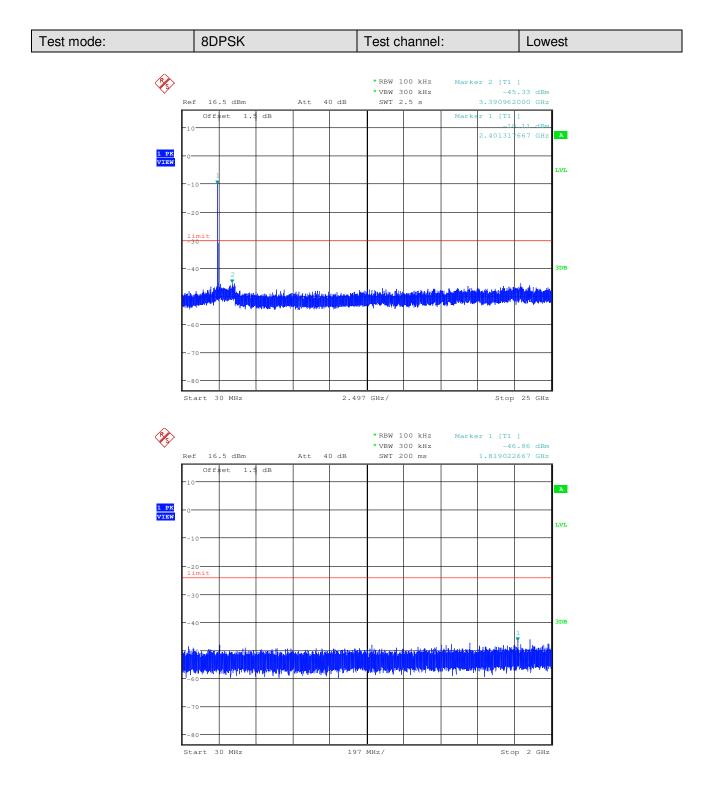

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM150900604702 Page: 75 of 99

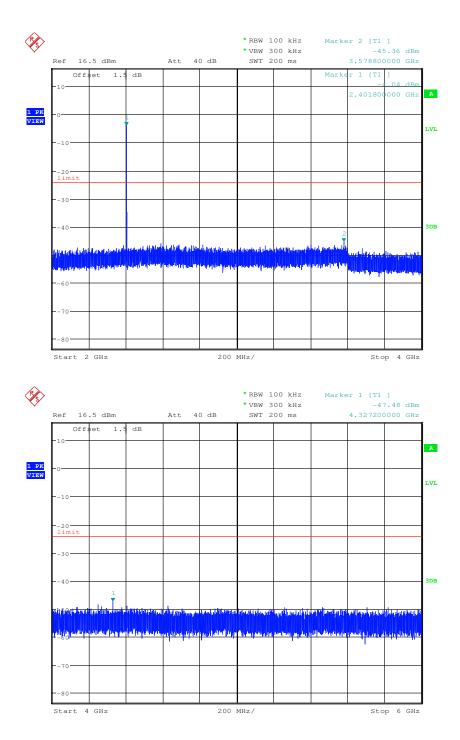




Report No.: SZEM150900604702 Page: 76 of 99

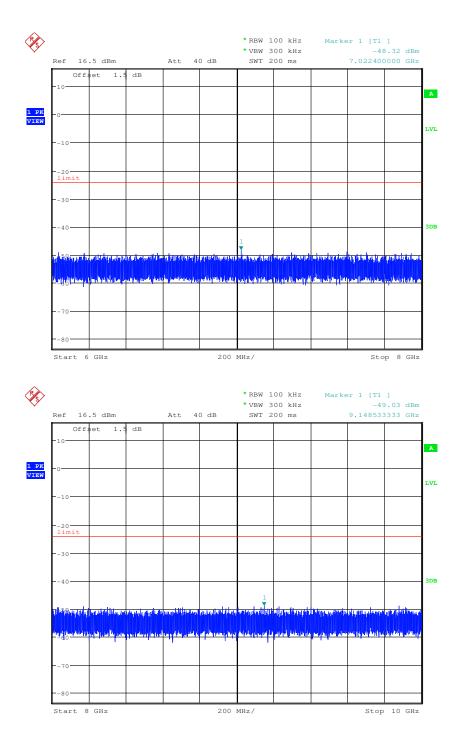




Report No.: SZEM150900604702 Page: 77 of 99

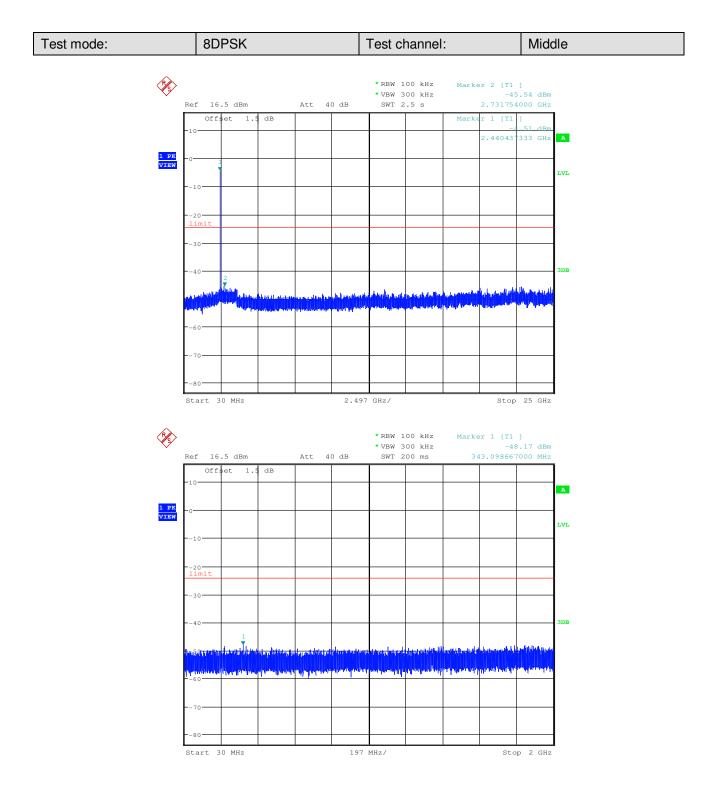




Report No.: SZEM150900604702 Page: 78 of 99

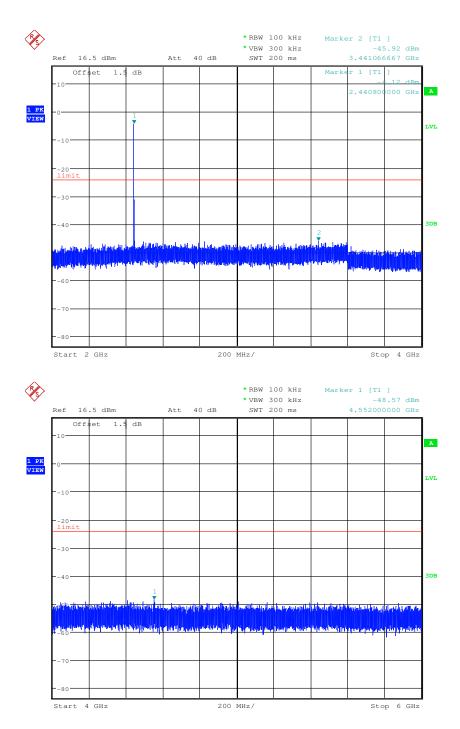




Report No.: SZEM150900604702 Page: 79 of 99

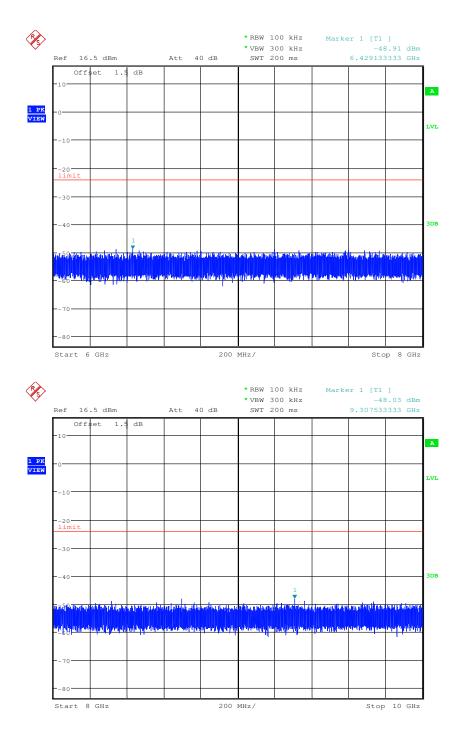




Report No.: SZEM150900604702 Page: 80 of 99

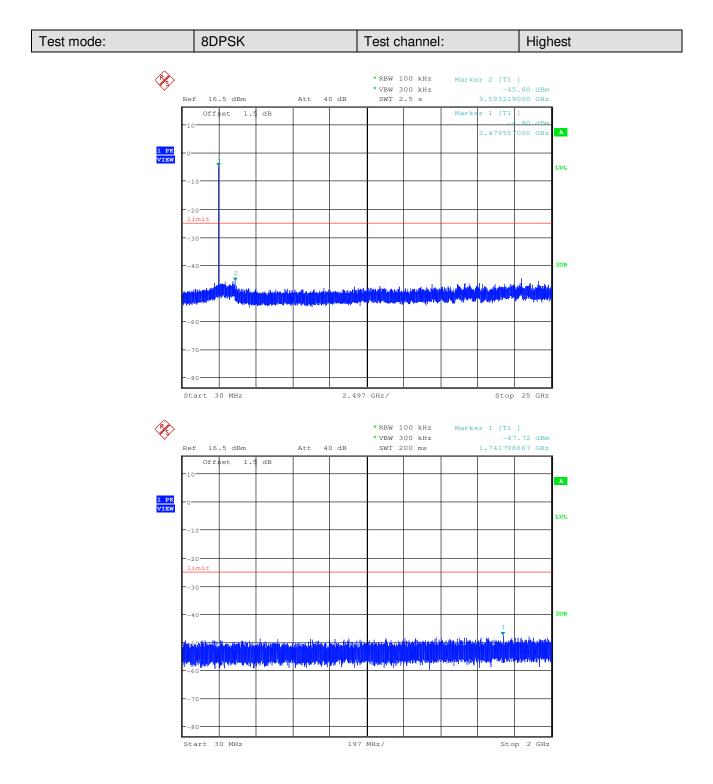

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM150900604702 Page: 81 of 99

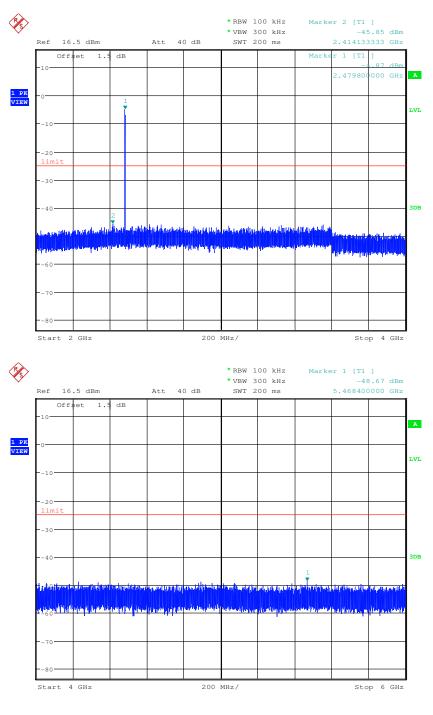





Report No.: SZEM150900604702 Page: 82 of 99

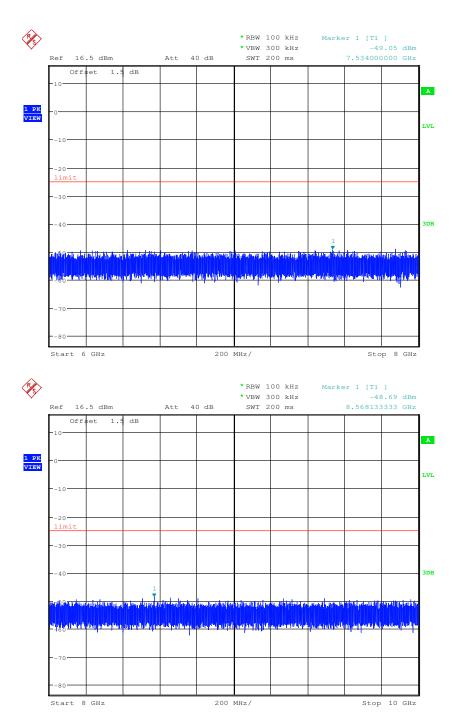

Remark:

Pretest 9kHz to 25GHz, find the highest point when testing, so only the worst data were shown in the test report. Per FCC Part 15.33 (a) and 15.31 (o) ,The amplitude of spurious emissions from intentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.



Report No.: SZEM150900604702 Page: 83 of 99

6.10 Other requirements Frequency Hopping Spread Spectrum System

Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1), (h) requirement:
The system shall hop to cha rate from a Pseudorandom of on the average by each tran	nnel frequencies that are selected at the system hopping ordered list of hopping frequencies. Each frequency must be used equally smitter. The system receivers shall have input bandwidths that match the s of their corresponding transmitters and shall shift frequencies in
channels during each transr receiver, must be designed transmitter be presented wit employing short transmissio	spectrum systems are not required to employ all available hopping mission. However, the system, consisting of both the transmitter and the to comply with all of the regulations in this section should the th a continuous data (or information) stream. In addition, a system on bursts must comply with the definition of a frequency hopping system missions over the minimum number of hopping channels specified in
the system to recognize othe independently chooses and The coordination of frequence	ence within a frequency hopping spread spectrum system that permits er users within the spectrum band so that it individually and adapts its hopsets to avoid hopping on occupied channels is permitted. cy hopping systems in any other manner for the express purpose of occupancy of individual hopping frequencies by multiple transmitters is
Compliance for section 15	5.247(a)(1)
stage shift register whose 5t outputs are added in a modu	ulo-two addition stage. And the result is fed back to the input of the first s with the first ONE of 9 consecutive ONEs; i.e. the shift register is initialized ages: 9 sequence: $2^9 - 1 = 511$ bits
	Chift Register for Generation of the PRBS sequence om Frequency Hopping Sequence as follow: 7 64 8 73 16 75 1



Report No.: SZEM150900604702 Page: 84 of 99

Compliance for section 15.247(g)

According to Bluetooth Core Specification, the Bluetooth system transmits the packet with the pseudorandom hopping frequency with a continuous data and the short burst transmission from the Bluetooth system is also transmitted under the frequency hopping system with the pseudorandom hopping frequency system.

Compliance for section 15.247(h)

According to Bluetooth Core specification, the Bluetooth system incorporates with an adaptive system to detect other user within the spectrum band so that it individually and independently to avoid hopping on the occupied channels.

According to the Bluetooth Core specification, the Bluetooth system is designed not have the ability to coordinated with other FHSS System in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitter.




Report No.: SZEM150900604702 Page: 85 of 99

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205							
Test Method:	ANSI C63.10: 2009	ANSI C63.10: 2009						
Test Site:	Measurement Distance	: 3m	n (Semi-Anech	noic Cham	ber)			
Receiver Setup:	Frequency		Detector	RBW	VBW	Remark		
	0.009MHz-0.090MH	z	Peak	10kHz	z 30kHz	Peak		
	0.009MHz-0.090MH	z	Average	10kHz	z 30kHz	Average		
	0.090MHz-0.110MH	z	Quasi-peak	10kHz	z 30kHz	Quasi-peak		
	0.110MHz-0.490MH	z	Peak	10kHz	z 30kHz	Peak		
	0.110MHz-0.490MH	z	Average	10kHz	z 30kHz	Average		
	0.490MHz -30MHz		Quasi-peak	10kHz	z 30kHz	Quasi-peak		
	30MHz-1GHz		Quasi-peak	100 kH	lz 300kHz	Quasi-peak		
	Above 1GHz		Peak	1MHz	z 3MHz	Peak		
	Above IGH2		Peak	1MHz	z 10Hz	Average		
Limit:	Frequency		eld strength crovolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)		
	0.009MHz-0.490MHz	2	400/F(kHz)	-	-	300		
	0.490MHz-1.705MHz	24	1000/F(kHz)	-	-	30		
	1.705MHz-30MHz		30	-	-	30		
	30MHz-88MHz		100	40.0	Quasi-peak	3		
	88MHz-216MHz		150	43.5	Quasi-peak	3		
	216MHz-960MHz		200	46.0	Quasi-peak	3		
	960MHz-1GHz		500	54.0	Quasi-peak	3		
	Above 1GHz 500			54.0	Average	3		
	Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.							

6.11 Radiated Spurious Emission



Report No.: SZEM150900604702 Page: 86 of 99

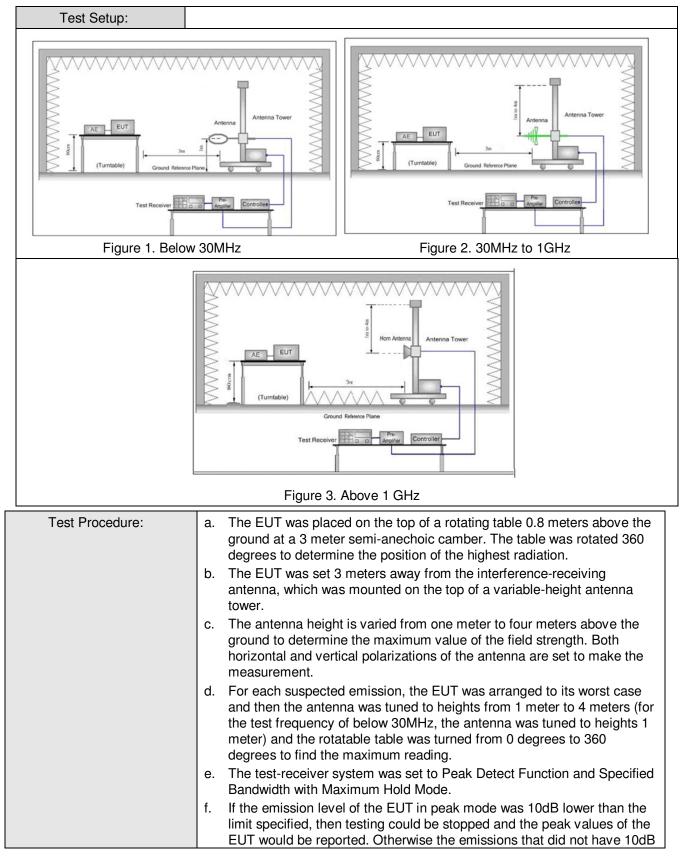



Report No.: SZEM150900604702 Page: 87 of 99


	margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.					
	 g. Test the EUT in the lowest channel (2402MHz), the middle channel (2441MHz), the Highest channel (2480MHz) 					
	h. Repeat above procedures until all frequencies measured was complete.					
Exploratory Test Mode:	Non-hopping transmitting mode with all kind of modulation and all kind of					
	data type					
	Transmitting mode					
Final Test Mode:	Through Pre-scan, find the DH1 of data type and GFSK modulation is the worst case.					
	For below 1GHz part, through pre-scan, the worst case is the lowest channel.					
	Only the worst case is recorded in the report.					
Instruments Used:	Refer to section 5.10 for details					
Test Results:	Pass					



Report No.: SZEM150900604702 Page: 88 of 99

6.11.1 Radiated Emission below 1GHz

30MHz~1GHz (QP)		
Test mode:	Transmitting	Vertical

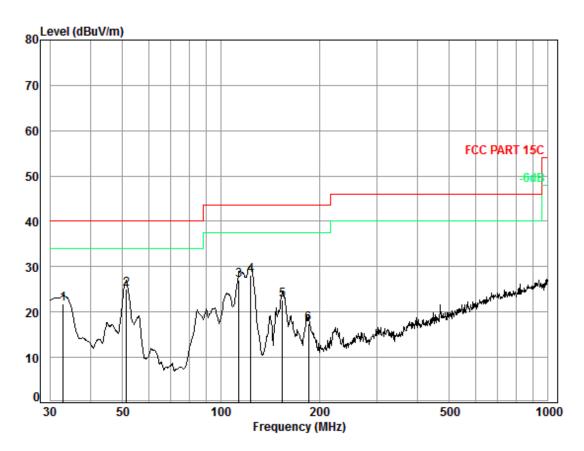


Condition: FCC PART 15C 3m 3142C Vertical Job No. : 6047CR Test mode: TX mode

	Frea	Cable		Preamp Factor		Loval	Limit Line	Over Limit
	rreq	LUSS	ractor	ractor	LEVEL	Level	LTHE	
-	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	32.86	0.60	17.10	27.35	31.39	21.74	40.00	-18.26
2	51.30	0.80	8.50	27.29	43.03	25.04	40.00	-14.96
3	113.32	1.24	8.37	27.11	44.56	27.06	43.50	-16.44
4	123.27	1.26	7.83	27.05	46.12	28.16	43.50	-15.34
5	154.28	1.33	9.26	26.89	38.95	22.65	43.50	-20.85
6	185.14	1.38	10.00	26.75	32.81	17.44	43.50	-26.06



Report No.: SZEM150900604702 Page: 89 of 99

Test mode: Transmitting Horizontal	
------------------------------------	--

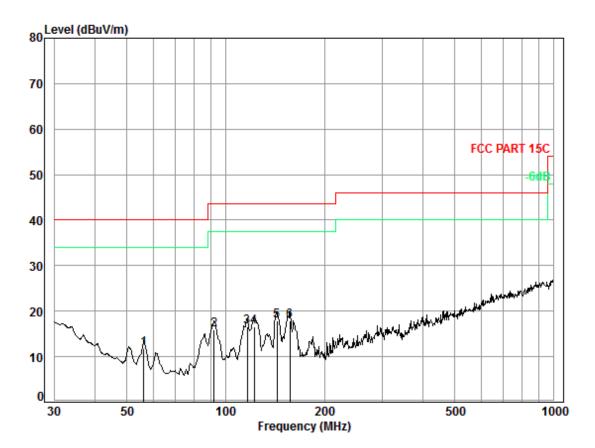

Condition:	FCC PART	15C 3m	3142C	Horizontal
Job No. :	6047CR			
Test mode:	TX mode			

		Cable	Ant	Preamp	Read		Limit	0ver
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuW		dBuV/m	dB
	11112	ub	ub/iii	ub	abav	ubuv/iii	ubuv/m	ub
1	56.20	0.80	7.77	27.27	30.40	11.70	40.00	-28.30
2	92.14	1.12	8.79	27.21	33.16	15.86	43.50	-27.64
3	116.13	1.24	8.17	27.09	34.21	16.53	43.50	-26.97
4	121.98	1.26	7.86	27.06	34.60	16.66	43.50	-26.84
5	143.33	1.30	8.40	26.94	35.02	17.78	43.50	-25.72
6	157.01	1.33	9.42	26.87	34.07	17.95	43.50	-25.55



Report No.: SZEM150900604702 Page: 90 of 99

Worse case r	mode: 0	GFSK(DH1)	Test	channel:	Lowest	Rema	ark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
3780.000	-31.20	33.00	0.00	39.80	41.60	74.00	-32.40	Vertical
4804.000	-30.40	34.30	0.00	41.00	44.90	74.00	-29.10	Vertical
6210.000	-29.20	34.90	0.00	39.80	45.50	74.00	-28.50	Vertical
7206.000	-27.90	35.80	0.00	37.20	45.10	74.00	-28.90	Vertical
9608.000	-25.10	37.20	0.00	35.30	47.40	74.00	-26.60	Vertical
12480.000	-23.10	38.00	0.00	34.40	49.30	74.00	-24.70	Vertical
3585.000	-31.20	32.40	0.00	39.90	41.10	74.00	-32.90	Horizontal
4804.000	-30.40	34.30	0.00	40.20	44.10	74.00	-29.90	Horizontal
5985.000	-28.90	34.80	0.00	38.60	44.50	74.00	-29.50	Horizontal
7206.000	-27.90	35.80	0.00	37.20	45.10	74.00	-28.90	Horizontal
9608.000	-25.10	37.20	0.00	34.80	46.90	74.00	-27.10	Horizontal
12450.000	-23.10	38.00	0.00	34.40	49.30	74.00	-24.70	Horizontal

6.11.2 Transmitter Emission above 1GHz

Worse case	mode:	GFSK(DH1) Test	channel:	Middle	Rem	ark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
3765.000	-31.10	32.90	0.00	40.10	41.90	74.00	-32.10	Vertical
4882.000	-30.40	34.60	0.00	39.10	43.30	74.00	-30.70	Vertical
6000.000	-28.80	34.90	0.00	39.00	45.10	74.00	-28.90	Vertical
7323.000	-27.90	35.70	0.00	37.50	45.30	74.00	-28.70	Vertical
9764.000	-24.90	37.30	0.00	34.80	47.20	74.00	-26.80	Vertical
12645.000	-23.10	38.10	0.00	34.60	49.60	74.00	-24.40	Vertical
3765.000	-31.10	32.90	0.00	39.70	41.50	74.00	-32.50	Horizontal
4882.000	-30.40	34.60	0.00	38.90	43.10	74.00	-30.90	Horizontal
5955.000	-29.00	34.70	0.00	39.40	45.10	74.00	-28.90	Horizontal
7323.000	-27.90	35.70	0.00	37.10	44.90	74.00	-29.10	Horizontal
9764.000	-24.90	37.30	0.00	34.00	46.40	74.00	-27.60	Horizontal
12645.000	-23.10	38.10	0.00	34.20	49.20	74.00	-24.80	Horizontal



Report No.: SZEM150900604702 Page: 91 of 99

Worse case	mode:	GFSK(DH1)) Tes	t channel:	Highest	Rem	ark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
3585.000	-31.20	32.40	0.00	42.10	43.30	74.00	-30.70	Vertical
4960.000	-30.30	34.60	0.00	39.20	43.50	74.00	-30.50	Vertical
5940.000	-29.10	34.70	0.00	39.40	45.00	74.00	-29.00	Vertical
7440.000	-27.90	35.80	0.00	38.40	46.30	74.00	-27.70	Vertical
9920.000	-23.90	37.30	0.00	33.90	47.30	74.00	-26.70	Vertical
12510.000	-23.00	38.00	0.00	34.00	49.00	74.00	-25.00	Vertical
3990.000	-30.90	33.20	0.00	40.20	42.50	74.00	-31.50	Horizontal
4960.000	-30.30	34.60	0.00	39.10	43.40	74.00	-30.60	Horizontal
6045.000	-29.00	35.00	0.00	38.60	44.60	74.00	-29.40	Horizontal
7440.000	-27.90	35.80	0.00	37.70	45.60	74.00	-28.40	Horizontal
9920.000	-23.90	37.30	0.00	34.80	48.20	74.00	-25.80	Horizontal
12630.000	-23.00	38.10	0.00	34.50	49.60	74.00	-24.40	Horizontal

Remark:

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor

2) Scan from 9kHz to 25GHz, the disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.





Report No.: SZEM150900604702 Page: 92 of 99

6.12 Restricted bands around fundamental frequency

Test Requirement: 47 CFR Part 15C Section 15.209 and 15.205								
Test Method:	ANSI C63.10: 2009							
Test Site:	Measurement Distance: 3m	n (Semi-Anechoic Chambe	r)					
Limit:	Frequency	Limit (dBuV/m @3m)	Remark					
	30MHz-88MHz	40.0	Quasi-peak Value					
	88MHz-216MHz	43.5	Quasi-peak Value					
	216MHz-960MHz	46.0	Quasi-peak Value					
	960MHz-1GHz	54.0	Quasi-peak Value					
	Above 1011-	54.0	Average Value					
	Above 1GHz	74.0	Peak Value					
			·					
Test Setup:								
Figure 1. 30M	Hz to 1GHz	Figure 2. Abc	we 1 GHz					




Report No.: SZEM150900604702 Page: 93 of 99

the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation. b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel g. Test the EUT in the lowest channel , the Highest channel . h. Repeat above procedures until all frequencies measured was complete. Kon-hopping transmitting mode with all kind of modulation and all kind of data type Transmitting mode Through Pre-scan, find the DH5 of data type and GFSK modulation i the worst case. Only the worst case is recorded in the report. Instruments Used: Refer to section 5.10 for details		
Exploratory Test Mode: Non-hopping transmitting mode with all kind of modulation and all kind of data type Transmitting mode Final Test Mode: Through Pre-scan, find the DH5 of data type and GFSK modulation i the worst case. Only the worst case is recorded in the report. Instruments Used: Refer to section 5.10 for details	Test Procedure:	 the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation. b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel g. Test the EUT in the lowest channel , the Highest channel . h. Repeat above procedures until all frequencies measured was
the worst case. Only the worst case is recorded in the report. Instruments Used: Refer to section 5.10 for details	Exploratory Test Mode:	
	Final Test Mode:	
Test Results: Pass	Instruments Used:	Refer to section 5.10 for details
	Test Results:	Pass



Report No.: SZEM150900604702 Page: 94 of 99

2405

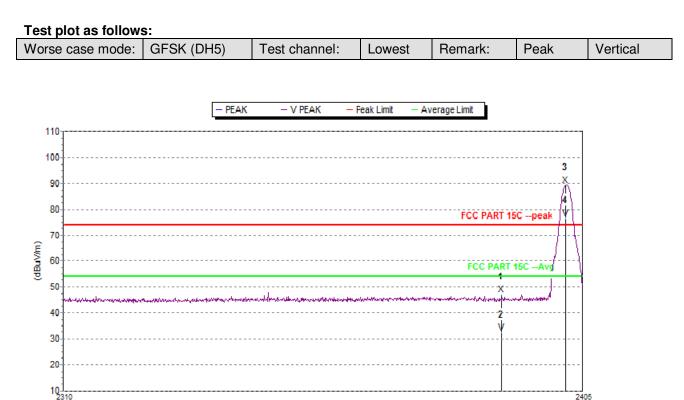


(MHz)

Mk.	Freq.(MHz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Ant.F.(dB/m)	Amp.G.(dB)	Cbl.L.(dB)	Pol.
Peak:								
1	2390	47.2	74.0	26.8	32.5	0.0	-19.3	V
3	2401.960	89.2	74.0	-15.2	32.6	0.0	-19.3	V
Avg								
2	2390	32.4	54.0	21.6	32.5	0.0	-19.3	V
4	2401.960	76.4	54.0	-22.4	32.6	0.0	-19.3	V



Report No.: SZEM150900604702 Page: 95 of 99

Worse case mode:	GFSK (DH5)	Test channel:	Lowest	Remark:	Peak	Horizontal	
------------------	------------	---------------	--------	---------	------	------------	--

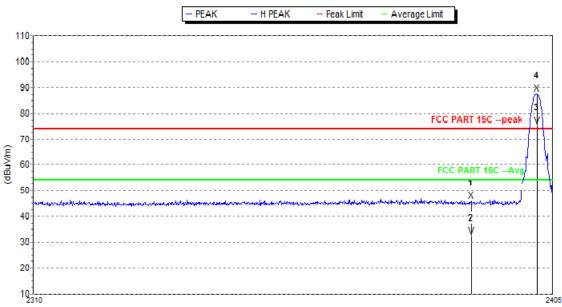


/14	ш-	٠١.
1.04	Π4	
£		- /

Mk.	Freq.(MHz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Ant.F.(dB/m)	Amp.G.(dB)	Cbl.L.(dB)	Pol.
Peak:								
1	2390	46.0	74.0	28.0	32.5	0.0	-19.3	Н
4	2402.245	87.6	74.0	-13.6	32.6	0.0	-19.3	Н
Avg								
2	2390	32.3	54.0	21.7	32.5	0.0	-19.3	Н
3	2402.245	75.2	54.0	-21.2	32.6	0.0	-19.3	Н



Report No.: SZEM150900604702 Page: 96 of 99

Worse case mode: 0	GFSK (DH5)	Test channel:	Highest	Remark:	Peak	Vertical	
--------------------	------------	---------------	---------	---------	------	----------	--

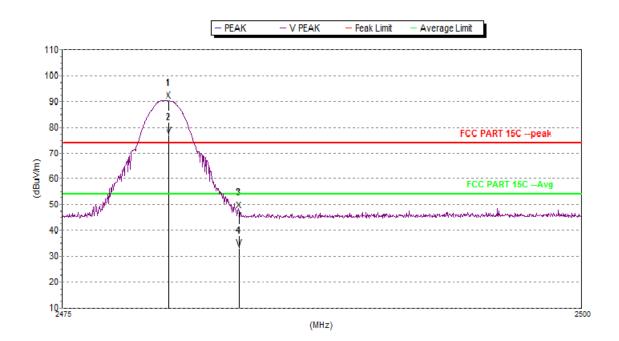


Mk.	Freq.(MHz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Ant.F.(dB/m)	Amp.G.(dB)	Cbl.L.(dB)	Pol.
Peak:								
1	2480.125	90.4	74.0	-16.4	32.5	0.0	-19.1	V
3	2483.5	47.9	74.0	26.1	32.5	0.0	-19.1	V
Avg								
2	2480.125	76.8	54.0	-22.8	32.5	0.0	-19.1	V
4	2483.5	33.2	54.0	20.8	32.5	0.0	-19.1	V



Report No.: SZEM150900604702 Page: 97 of 99

Worse case mode:	GFSK (DH5)	Test channel:	Highest	Remark:	Peak	Horizontal	
------------------	------------	---------------	---------	---------	------	------------	--

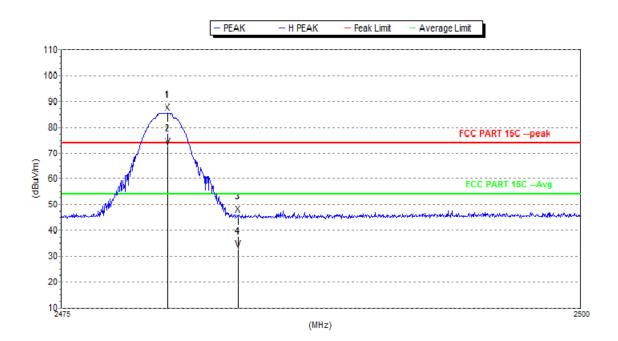

Mk.	Freq.(MHz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Ant.F.(dB/m)	Amp.G.(dB)	Cbl.L.(dB)	Pol.
Peak:								
1	2480.125	85.5	74.0	-11.5	32.5	0.0	-19.1	Н
3	2483.5	46.2	74.0	27.8	32.5	0.0	-19.1	Н
Avg								
2	2480.125	72.5	54.0	-18.5	32.5	0.0	-19.1	Н
4	2483.5	32.7	54.0	21.3	32.5	0.0	-19.1	Н

Note:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor



Report No.: SZEM150900604702 Page: 98 of 99

7 Photographs - EUT Test Setup

Test model No.:315-10A

7.1 Conducted Emission



7.2 Radiated Emission





Report No.: SZEM150900604702 Page: 99 of 99

7.3 Radiated Spurious Emission



8 Photographs - EUT Constructional Details

Refer to Appendix A - Photographs of EUT Constructional Details for SZEM1509006047CR.