

No. 1 Workshop, M-10, Middle section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057

 Telephone:
 +86 (0) 755 2601 2053

 Fax:
 +86 (0) 755 2671 0594

 Email:
 ee.shenzhen@sgs.com

Report No.: SZEM140900529801 Page: 1 of 95

FCC REPORT

Application No:	SZEM1409005298RF
Applicant:	eMoMo Tech Co., Ltd
Manufacturer:	eMoMo Tech Co., Ltd
Factory:	eMoMo Tech Co., Ltd
Product Name:	music suit
Model No.(EUT):	39X(B),
Add Model No.:	39X-XXYY, 39X(W), 39X(W)-A, 39X(B), 39X(B)-A, 39X(G)
Trade mark:	39X
FCC ID:	A4E39X-XXYY
Standards:	47 CFR Part 15, Subpart C (2013)
Date of Receipt:	2014-09-25
Date of Test:	2014-09-29 to 2014-11-14
Date of Issue:	2014-11-19
Test Result:	PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Jack Zhang EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.



Report No.: SZEM140900529801 Page: 2 of 95

2 Version

Revision Record						
Version	Chapter	Date	Modifier	Remark		
00		2014-11-19		Original		

Authorized for issue by:		
Tested By	(Owen Zhou) /Project Engineer	2014-11-14 Date
Prepared By	Bella Ou) /Clerk	2014-11-19 Date
Checked By	Emen _ Li (Emen Li) /Reviewer	2014-11-21 Date



Report No.: SZEM140900529801 Page: 3 of 95

3 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15, Subpart C Section 15.203/15.247 (c)	ANSI C63.10 (2009)	PASS
AC Power Line Conducted Emission	47 CFR Part 15, Subpart C Section 15.207	ANSI C63.10 (2009)	PASS
Conducted Peak Output Power	47 CFR Part 15, Subpart C Section 15.247 (b)(1)	ANSI C63.10 (2009)	PASS
20dB Occupied Bandwidth	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10 (2009)	PASS
Carrier Frequencies Separation	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10 (2009)	PASS
Hopping Channel Number	47 CFR Part 15, Subpart C Section 15.247 (b)	ANSI C63.10 (2009)	PASS
Dwell Time	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10 (2009)	PASS
Pseudorandom Frequency Hopping Sequence	47 CFR Part 15, Subpart C Section 15.247(b)(4)&TCB Exclusion List (7 July 2002)	ANSI C63.10 (2009)	PASS
Band-edge for RF Conducted Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 (2009)	PASS
RF Conducted Spurious Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 (2009)	PASS
Radiated Spurious emissions	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 (2009)	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 (2009)	PASS

Remark:

Model No.: 39X-XXYY, 39X(W), 39X(W)-A, 39X(B), 39X(B)-A, 39X(G)

Only the model 39X(B) was tested, since the circuit design, PCB layout, electrical components used, internal wiring and functions were identical for the above models, with difference being model name and colour.



Report No.: SZEM140900529801 Page: 4 of 95

4 Contents

Page

1	cc	OVER PAGE	
2	VE	RSION	2
3	TE	ST SUMMARY	3
4	CC	ONTENTS	4
5	GE	ENERAL INFORMATION	5
	5.1	CLIENT INFORMATION	5
	5.2	GENERAL DESCRIPTION OF EUT	
	5.3	TEST ENVIRONMENT	
	5.4	DESCRIPTION OF SUPPORT UNITS	
	5.5	TEST LOCATION	
	5.6	TEST FACILITY	
	5.7	DEVIATION FROM STANDARDS	
	5.8	ABNORMALITIES FROM STANDARD CONDITIONS	
	5.9	OTHER INFORMATION REQUESTED BY THE CUSTOMER EOUIPMENT LIST	
	5.10		
6	TE	ST RESULTS AND MEASUREMENT DATA	
	6.1	ANTENNA REQUIREMENT	
	6.2	Conducted Emissions	
	6.3	CONDUCTED PEAK OUTPUT POWER	
	6.4	20dB Occupy Bandwidth	
	6.5	CARRIER FREQUENCIES SEPARATION	
	6.6	HOPPING CHANNEL NUMBER	
	6.7	DWELL TIME	
	6.8	BAND-EDGE FOR RF CONDUCTED EMISSIONS	
	6.9	SPURIOUS RF CONDUCTED EMISSIONS	
	6.10	OTHER REQUIREMENTS FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM	
	6.11	RADIATED SPURIOUS EMISSION	
		11.1 Radiated Emission below 1GHz	
		11.2 Transmitter Emission above 1GHz	
	6.12	RESTRICTED BANDS AROUND FUNDAMENTAL FREQUENCY	86-95



Report No.: SZEM140900529801 Page: 5 of 95

5 General Information

5.1 Client Information

Applicant:	eMoMo Tech Co., Ltd		
Address of Applicant:	4th, Floor, Yong He Building, Tai Wan Industrial Park, Shi Yan Town, Bao'an District, Shen Zhen, Guangdong, China		
Manufacturer:	eMoMo Tech Co., Ltd		
Address of Manufacturer:	4th, Floor, Yong He Building, Tai Wan Industrial Park, Shi Yan Town, Bao'an District, Shen Zhen, Guangdong, China		
Factory:	eMoMo Tech Co., Ltd		
Address of Factory:	4th, Floor, Yong He Building, Tai Wan Industrial Park, Shi Yan Town, Bao'an District, Shen Zhen, Guangdong, China		

5.2 General Description of EUT

Product Name:	music suit
Model No.:	39X-XXYY, 39X(W), 39X(W)-A, 39X(B), 39X(B)-A, 39X(G)
Trade Mark:	39X
Operation Frequency:	2402MHz~2480MHz
Bluetooth Version:	3.0+EDR
Modulation Technique:	Frequency Hopping Spread Spectrum(FHSS)
Modulation Type:	GFSK, π/4DQPSK, 8DPSK
Number of Channel:	79
Hopping Channel Type:	Adaptive Frequency Hopping systems
Sample Type:	fixed production
Test Power Grade:	46(manufacturer declare)
Test Software of EUT:	Blue test 3 (manufacturer declare)
Antenna Type:	Integral
Antenna Gain:	0dBi
Power Supply:	MODEL NO.:RSS1006-240120-W2E INPUT:100-200V~50/60Hz 0.6A OUTPUT:12V==2A OUTPUT POWER:24W MAX.
Test Voltage:	AC 120V 60Hz
Connect cable:	100cm (Unshielded)
Adapter cable:	200cm (Unshielded)

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM140900529801 Page: 6 of 95

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	21	2422MHz	41	2442MHz	61	2462MHz
2	2403MHz	22	2423MHz	42	2443MHz	62	2463MHz
3	2404MHz	23	2424MHz	43	2444MHz	63	2464MHz
4	2405MHz	24	2425MHz	44	2445MHz	64	2465MHz
5	2406MHz	25	2426MHz	45	2446MHz	65	2466MHz
6	2407MHz	26	2427MHz	46	2447MHz	66	2467MHz
7	2408MHz	27	2428MHz	47	2448MHz	67	2468MHz
8	2409MHz	28	2429MHz	48	2449MHz	68	2469MHz
9	2410MHz	29	2430MHz	49	2450MHz	69	2470MHz
10	2411MHz	30	2431MHz	50	2451MHz	70	2471MHz
11	2412MHz	31	2432MHz	51	2452MHz	71	2472MHz
12	2413MHz	32	2433MHz	52	2453MHz	72	2473MHz
13	2414MHz	33	2434MHz	53	2454MHz	73	2474MHz
14	2415MHz	34	2435MHz	54	2455MHz	74	2475MHz
15	2416MHz	35	2436MHz	55	2456MHz	75	2476MHz
16	2417MHz	36	2437MHz	56	2457MHz	76	2477MHz
17	2418MHz	37	2438MHz	57	2458MHz	77	2478MHz
18	2419MHz	38	2439MHz	58	2459MHz	78	2479MHz
19	2420MHz	39	2440MHz	59	2460MHz	79	2480MHz
20	2421MHz	40	2441MHz	60	2461MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The Lowest channel	2402MHz
The Middle channel	2441MHz
The Highest channel	2480MHz

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM140900529801 Page: 7 of 95

5.3 Test Environment

Operating Environment:		
Temperature:	20.0 °C	
Humidity:	55 % RH	
Atmospheric Pressure:	1005 mbar	

5.4 Description of Support Units

The EUT has been tested independent unit.

5.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch E&E Lab,

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China. 518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594 No tests were sub-contracted.



Report No.: SZEM140900529801 Page: 8 of 95

5.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• CNAS (No. CNAS L2929)

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

• VCCI

The 3m Semi-anechoic chamber, Full-anechoic Chamber and Shielded Room (7.5m x 4.0m x 3.0m) of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-2197, G-416, T-1153 and C-2383 respectively.

• FCC – Registration No.: 556682

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 556682.

Industry Canada (IC)

Two 3m Semi-anechoic chambers of SGS-CSTC Standards Technical Services Co., Ltd. have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1 & 4620C-2.

5.7 Deviation from Standards

None.

5.8 Abnormalities from Standard Conditions

None.

5.9 Other Information Requested by the Customer

None.



Report No.: SZEM140900529801 Page: 9 of 95

5.10 Equipment List

	Conducted Emission					
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)	
1	Shielding Room	ZhongYu Electron	GB-88	SEL0042	2015-06-10	
2	LISN	Rohde & Schwarz	ENV216	SEL0152	2015-10-24	
3	LISN	ETS-LINDGREN	3816/2	SEL0021	2015-05-16	
4	8 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN- T8-02	SEL0162	2015-08-30	
5	4 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN- T4-02	SEL0163	2015-08-30	
6	2 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN- T2-02	SEL0164	2015-08-30	
7	EMI Test Receiver	Rohde & Schwarz	ESCI	SEL0022	2015-05-16	
8	Coaxial Cable	SGS	N/A	SEL0025	2015-05-29	
9	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2015-10-24	
10	Humidity/ Temperature Indicator	Shanhai Qixiang	ZJ1-2B	SEL0103	2015-10-24	
11	Barometer	Chang Chun	DYM3	SEL0088	2015-05-16	



Report No.: SZEM140900529801 Page: 10 of 95

	RE in Chamber				
ltem	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)
1	3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEL0017	2015-06-10
2	EMI Test Receiver	Agilent Technologies	N9038A	SEL0312	2015-09-16
3	EMI Test software	AUDIX	E3	SEL0050	N/A
4	BiConiLog Antenna (26-3000MHz)	ETS-LINDGREN	3142C	SEL0015	2015-10-24
5	Double-ridged horn (1-18GHz)	ETS-LINDGREN	3117	SEL0006	2015-10-24
6	Horn Antenna (18-26GHz)	ETS-LINDGREN	3160	SEL0076	2015-10-24
7	Pre-amplifier (0.1-1300MHz)	Agilent Technologies	8447D	SEL0053	2015-05-16
8	Pre-Amplifier (0.1-26.5GHz)	Compliance Directions Systems Inc.	PAP-0126	SEL0168	2015-10-24
9	Coaxial cable	SGS	N/A	SEL0027	2015-05-29
10	Coaxial cable	SGS	N/A	SEL0189	2015-05-29
11	Coaxial cable	SGS	N/A	SEL0121	2015-05-29
12	Coaxial cable	SGS	N/A	SEL0178	2015-05-29
13	Band filter	Amindeon	82346	SEL0094	2015-05-16
14	Barometer	Chang Chun	DYM3	SEL0088	2015-05-16
15	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2015-10-24
16	Humidity/ Temperature Indicator	Shanhai Qixiang	ZJ1-2B	SEL0103	2015-10-24
17	Signal Generator (10M-27GHz)	Rohde & Schwarz	SMR27	SEL0067	2015-05-16
18	Signal Generator	Rohde & Schwarz	SMY01	SEL0155	2015-10-24
19	Loop Antenna	Beijing Daze	ZN30401	SEL0203	2015-06-04

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM140900529801 Page: 11 of 95

	RF connected test					
ltem	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)	
1	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2015-10-24	
2	Humidity/ Temperature Indicator	HYGRO	ZJ1-2B	SEL0033	2015-10-24	
3	Spectrum Analyzer	Rohde & Schwarz	FSP	SEL0154	2015-10-24	
4	Coaxial cable	SGS	N/A	SEL0178	2015-05-29	
5	Coaxial cable	SGS	N/A	SEL0179	2015-05-29	
6	Barometer	ChangChun	DYM3	SEL0088	2015-05-16	
7	Signal Generator	Rohde & Schwarz	SML03	SEL0068	2015-05-16	
8	Band filter	amideon	82346	SEL0094	2015-05-16	
9	POWER METER	R & S	NRVS	SEL0144	2015-10-24	
10	Attenuator	Beijin feihang taida	TST-2-6dB	SEL0205	2015-05-16	
11	Power Divider(splitter)	Agilent Technologies	11636B	SEL0130	2015-10-24	

Note: The calibration interval is one year, all the instruments are valid.





Report No.: SZEM140900529801 Page: 12 of 95

6 Test results and Measurement Data

6.1 Antenna Requirement

Standard requirement:	47 CFR Part 15C Section 15.203 /247(c)				
15.203 requirement:	15.203 requirement:				
An intentional radiator shall responsible party shall be us antenna that uses a unique so that a broken antenna ca electrical connector is prohib 15.247(b) (4) requirement: The conducted output power antennas with directional ga section, if transmitting anten	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.				
power from the intentional ra	adiator shall be reduced below the stated values in paragraphs (b)(1),				
(b)(2), and (b)(3) of this sect antenna exceeds 6 dBi.	ion, as appropriate, by the amount in dB that the directional gain of the				
EUT Antenna:	EUT Antenna:				
The antenna is integrated or	the main PCB and no consideration of replacement. The best case gain				
of the antenna is 0dBi					
	tantenna				




Report No.: SZEM140900529801 Page: 13 of 95

Test Requirement:	47 CFR Part 15C Section 15.207		
Test Method:	ANSI C63.10: 2009		
Test Frequency Range:			
Limit:		Limit (dBuV)	
	Frequency range (MHz)	Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
	* Decreases with the logarithm	n of the frequency.	
Test Procedure:			bugh a LISN 1 (Line a $30\Omega/50\mu$ H + 5Ω linear if the EUT were d to the ground or the unit being d to connect multiple of the LISN was not c table 0.8m above the rangement, the EUT was erence plane. The rear d reference plane. The e horizontal ground om the boundary of the plane for LISNs his distance was EUT. All other units of 0.8 m from the LISN 2.

6.2 Conducted Emissions



Report No.: SZEM140900529801 Page: 14 of 95

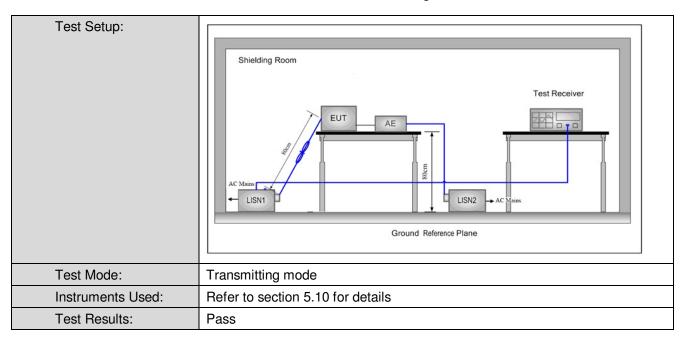

Measurement Data


An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.



Report No.: SZEM140900529801 Page: 15 of 95

Live line:

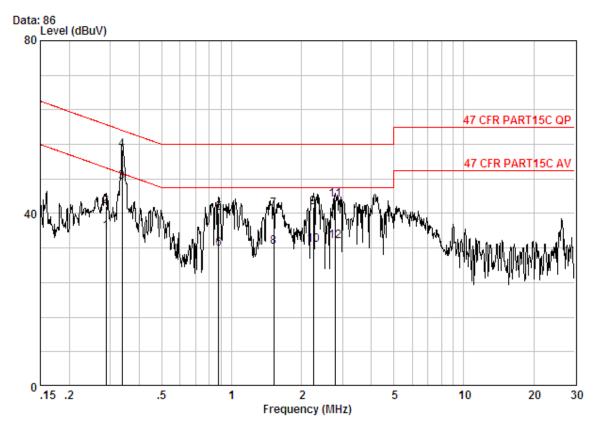

Site	: Shielding Room
Condition	: 47 CFR PART15C QP CE LINE
Job No:	: 5298RF


mode: : TX mode

	Freq	Cable Loss	LISN Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1 2	0.28782	0.01	9.70 9.70	26.03 32.03			-14.85 -18.85	Average
2 3 4	0.33800	0.01	9.74	37.60		49.25	-1.90	Average
* 5 6	0.88031	0.02	9.80	30.25	40.07	56.00	-15.93	QР
7	0.88031	0.02	9.80 9.80	31.14	40.96	56.00	-15.04	
8 9	1.519 2.249	0.02	9.80 9.81		41.51	56.00	-14.49	~
10 11	2.249 2.794	0.02 0.02	9.81 9.84		32.70 43.06	56.00	-12.94	~
12	2.794	0.02	9.84	23.72	33.58	46.00	-12.42	Average



Report No.: SZEM140900529801 Page: 16 of 95

Neutral line:

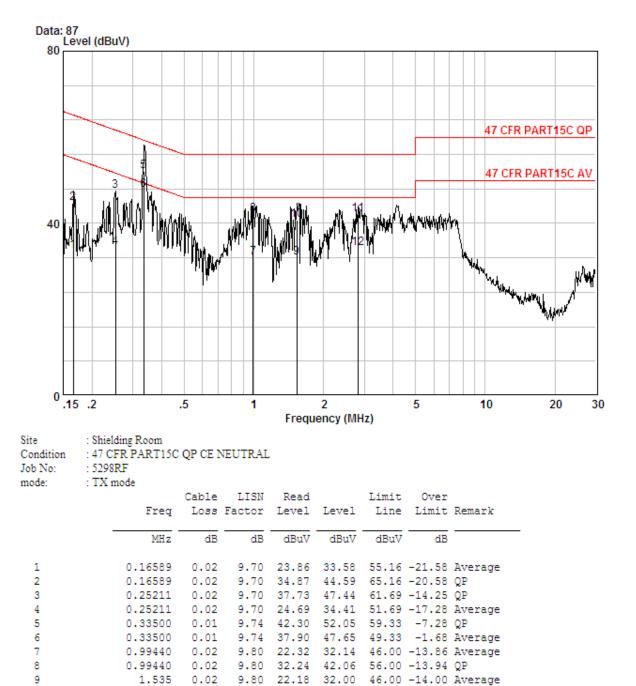

Notes:

1.535

2.809

2.809

0.02

0.02

0.02

10

11

12

1. The following Quasi-Peak and Average measurements were performed on the EUT:

2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.

9.84

32.27

9.84 24.39 34.25

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

9.80 30.87 40.69 56.00 -15.31 QP

56.00 -13.87 QP

46.00 -11.75 Average

42.13



Report No.: SZEM140900529801 Page: 17 of 95

6.3 Conducted Peak Output Power

Test Requirement:	47 CFR Part 15C Section 15.247 (b)(1)		
Test Method:	ANSI C63.10:2009		
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane Remark:		
Limit:	30dBm		
Exploratory Test Mode:	Non-hopping transmitting with all kind of modulation and all kind of data type		
Final Test Mode:	Through Pre-scan, find the DH1 of data type is the worse case of GFSK modulation type, 2-DH1 of data type is worse case of $\pi/4DQPSK$ modulation type, 3-DH1 of data type is worse case of 8DPSK modulation type.		
Instruments Used:	Refer to section 5.10 for details		
Test Results:	Pass		

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM140900529801 Page: 18 of 95

Measurement Data					
GFSK mode					
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result		
Lowest	-3.63	30.00	Pass		
Middle	0.36	30.00	Pass		
Highest	1.15	30.00	Pass		
	π/4DQPSK m	ode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result		
Lowest	-5.90	30.00	Pass		
Middle	-2.08	30.00	Pass		
Highest	Highest -1.25		Pass		
	8DPSK mod	e			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result		
Lowest	-5.56	30.00	Pass		
Middle	-1.30	30.00	Pass		
Highest	-0.53	30.00	Pass		

Measurement Data





Report No.: SZEM140900529801 Page: 19 of 95

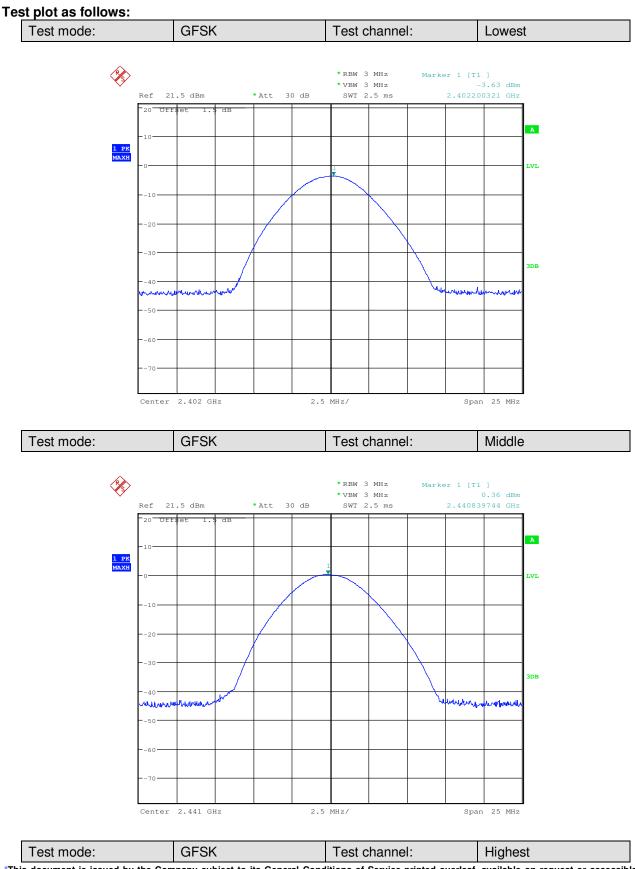




Report No.: SZEM140900529801 Page: 20 of 95

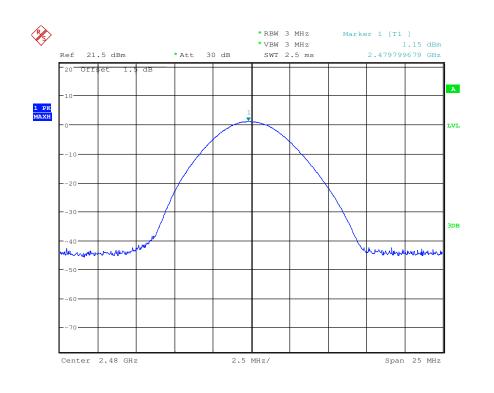

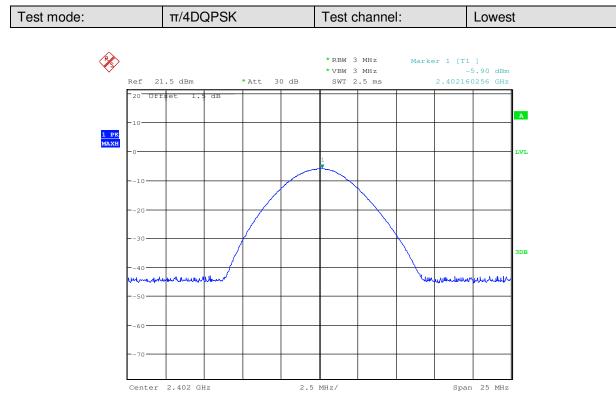




Report No.: SZEM140900529801 Page: 21 of 95

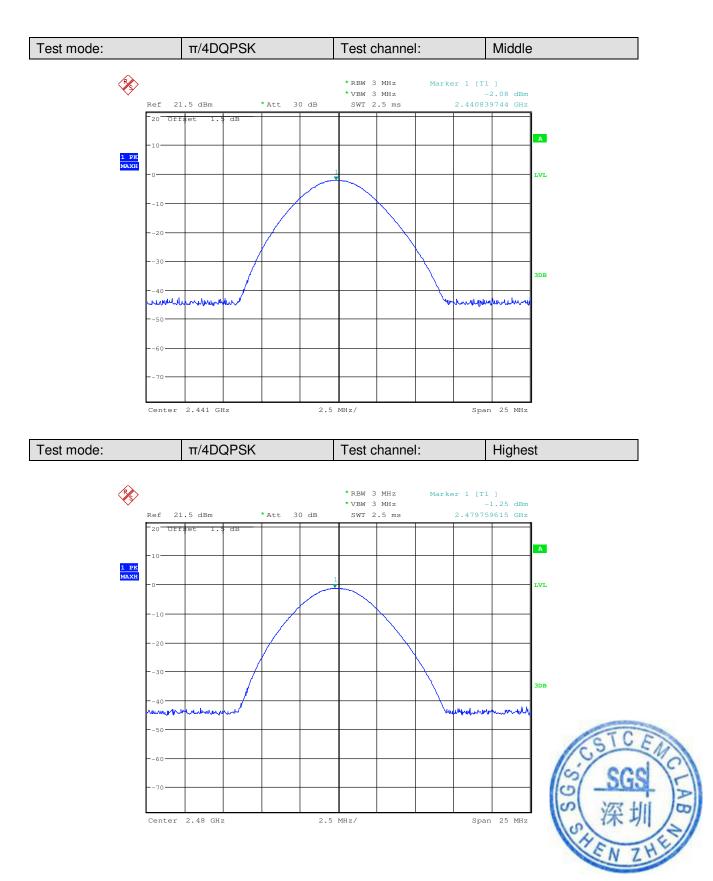




Report No.: SZEM140900529801 Page: 22 of 95

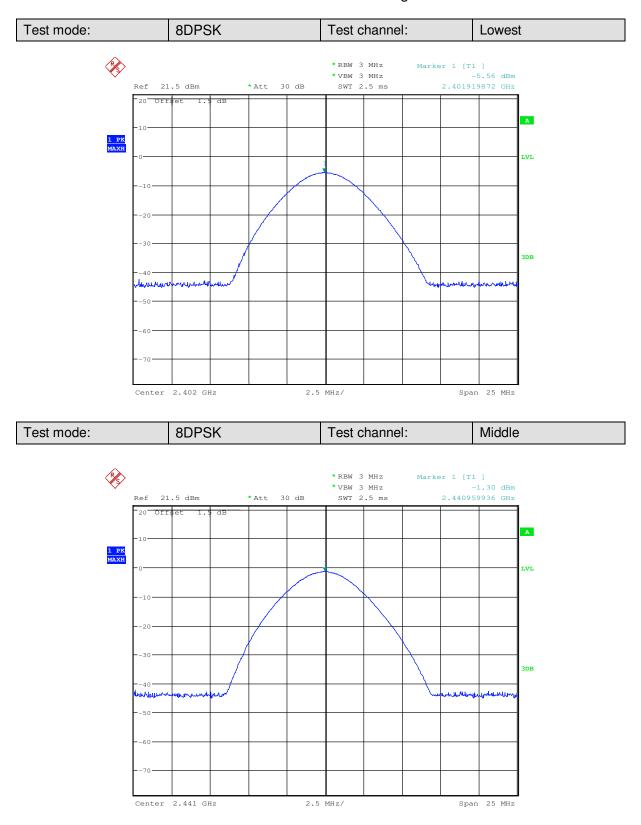



Report No.: SZEM140900529801 Page: 23 of 95

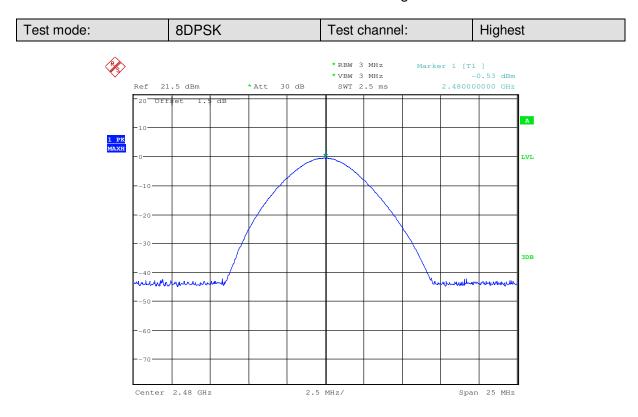



Report No.: SZEM140900529801 Page: 24 of 95

6.4 20dB Occupy Bandwidth


Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1)		
Test Method:	ANSI C63.10:2009		
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table		
Limit:	NA		
Exploratory Test Mode:	Non-hopping transmitting with all kind of modulation and all kind of data type		
Final Test Mode:	Through Pre-scan, find the DH1 of data type is the worse case of GFSK modulation type, 2-DH1 of data type is worse case of π /4DQPSK modulation type, 3-DH1 of data type is worse case of 8DPSK modulation type		
Instruments Used:	Refer to section 5.10 for details		
Test Results:	Pass		

Measurement Data

Test shapped	20dB Occupy Bandwidth (kHz)			
Test channel	GFSK	π/4DQPSK	8DPSK	
Lowest	894.230769231	1211.538462	1211.538462	
Middle	899.038461539	1221.153846	1216.346154	
Highest	899.038461539	1221.153846	1216.346154	




Report No.: SZEM140900529801 Page: 25 of 95

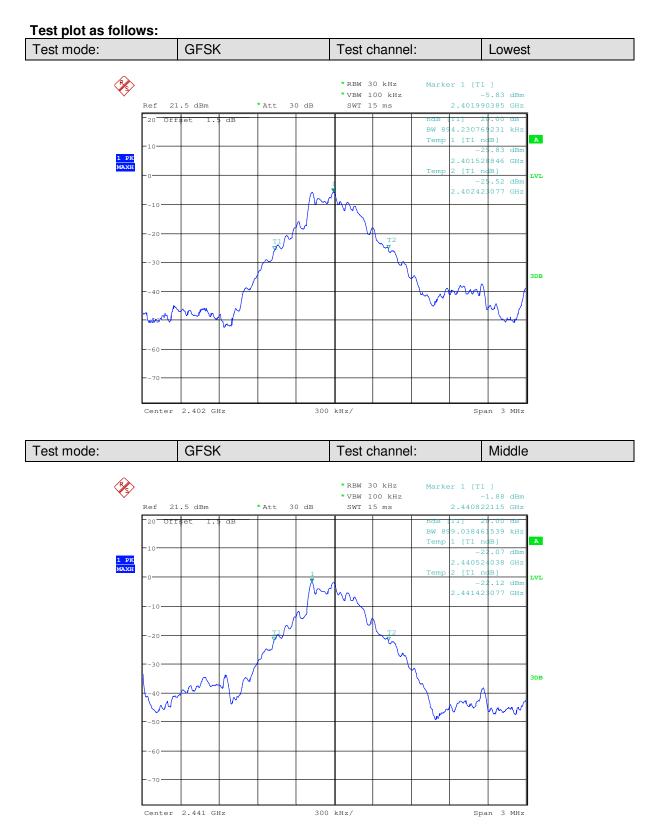




Report No.: SZEM140900529801 Page: 26 of 95

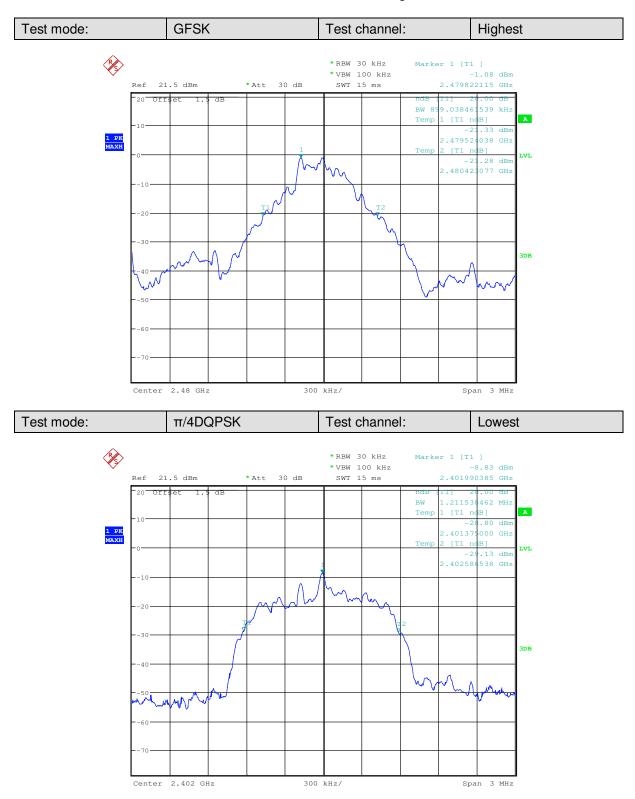




Report No.: SZEM140900529801 Page: 27 of 95

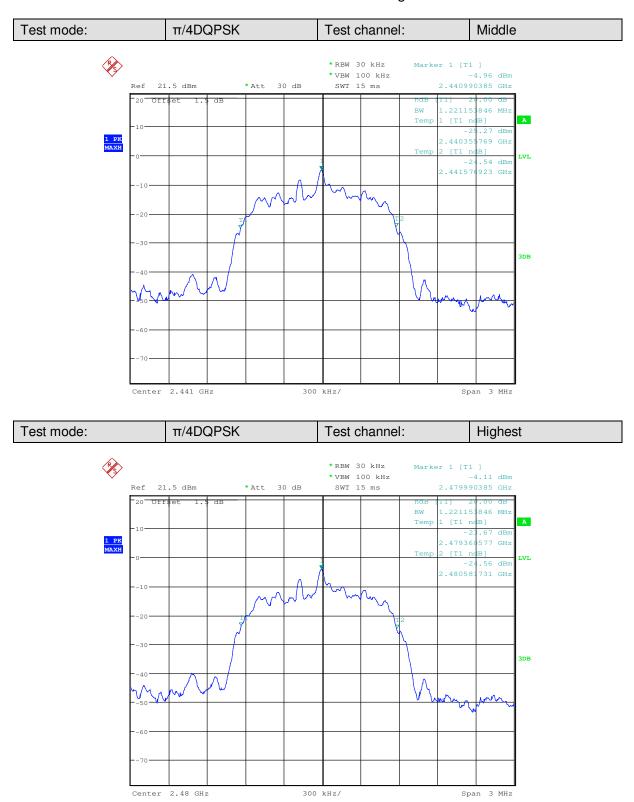




Report No.: SZEM140900529801 Page: 28 of 95

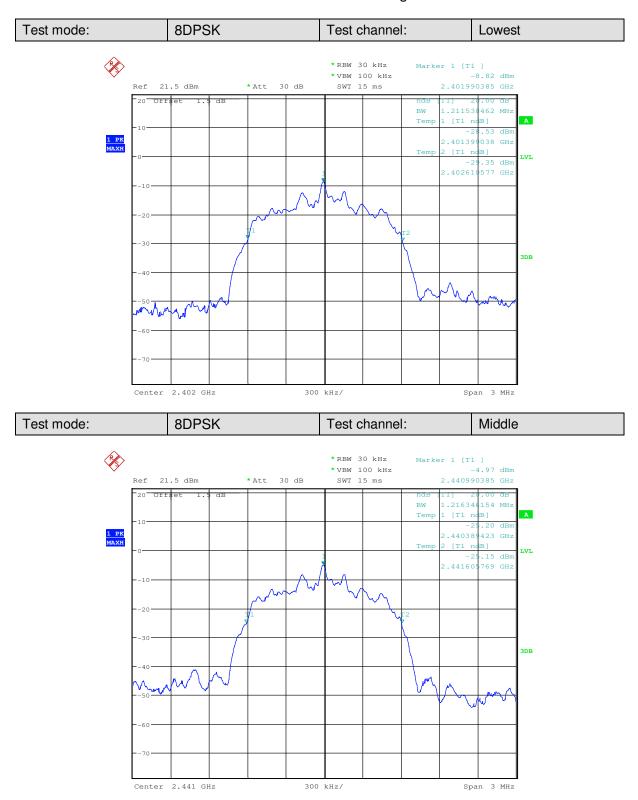



Report No.: SZEM140900529801 Page: 29 of 95

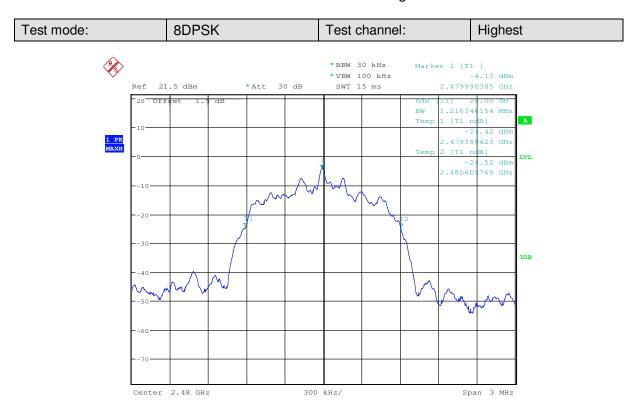



Report No.: SZEM140900529801 Page: 30 of 95

6.5 Carrier Frequencies Separation

Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1)		
Test Method:	ANSI C63.10:2009		
Test Setup:	ANSI C63.10:2009		
Limit:	2/3 of the 20dB bandwidth		
	Remark: the transmission power is less than 0.125W.		
Exploratory Test Mode:	Hopping transmitting with all kind of modulation and all kind of data type		
Final Test Mode:	Through Pre-scan, find the DH1 of data type is the worse case of GFSK modulation type, 2-DH1 of data type is worse case of π /4DQPSK modulation type, 3-DH1 of data type is worse case of 8DPSK modulation type.		
Instruments Used:	Refer to section 5.10 for details		
Test Results:	Pass		



Report No.: SZEM140900529801 Page: 31 of 95

Measurement Data

	GFSK mode				
Test channel	Carrier Frequencies Separation (kHz)	Limit (kHz)	Result		
Lowest	1002	567	Pass		
Middle	1002	567	Pass		
Highest	1006	567	Pass		
	π/4DQPSK m	node			
Test channel	Carrier Frequencies Separation (kHz)	Limit (kHz)	Result		
Lowest	1002	776	Pass		
Middle	1002	776	Pass		
Highest	Highest 1002		Pass		
	8DPSK mo	de			
Test channel	Carrier Frequencies Separation (kHz)	Limit (kHz)	Result		
Lowest	1002	766	Pass		
Middle	1006	766	Pass		
Highest	1002	766	Pass		


Note: According to section 6.3

Mode	20dB bandwidth (kHz) (worse case)	Limit (kHz) (Carrier Frequencies Separation)	
GFSK	850.961538462	567	
π/4DQPSK	1163.461538	776	
8DPSK	1149.038462	766	






Report No.: SZEM140900529801 Page: 32 of 95

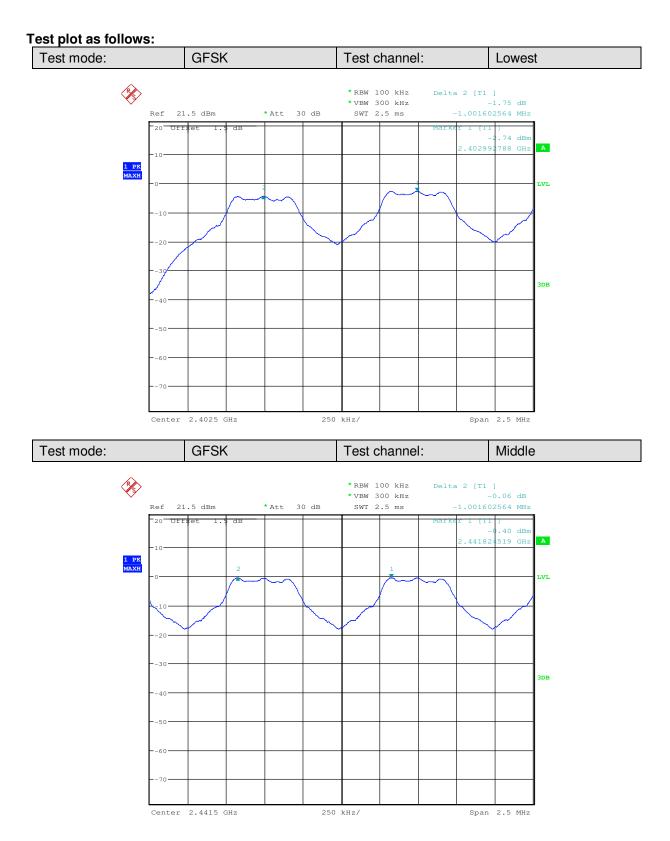




Report No.: SZEM140900529801 Page: 33 of 95

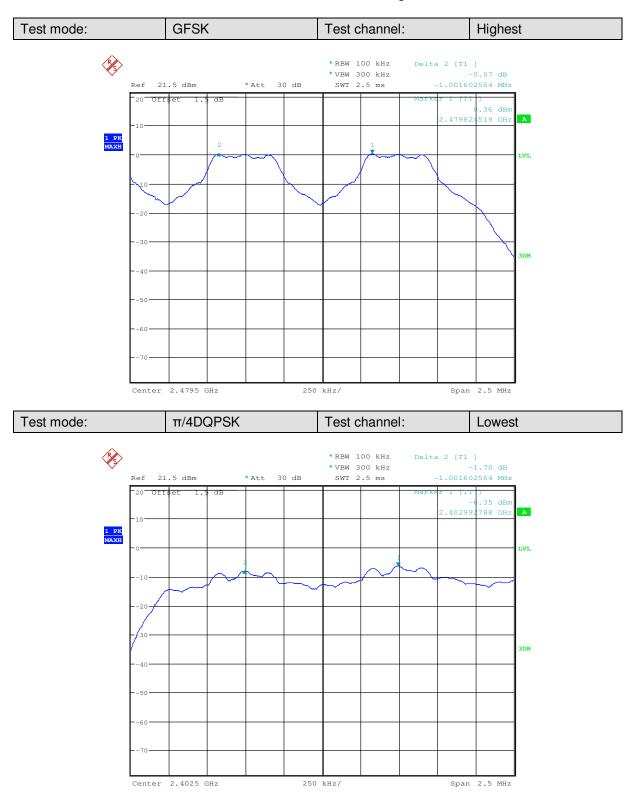




Report No.: SZEM140900529801 Page: 34 of 95

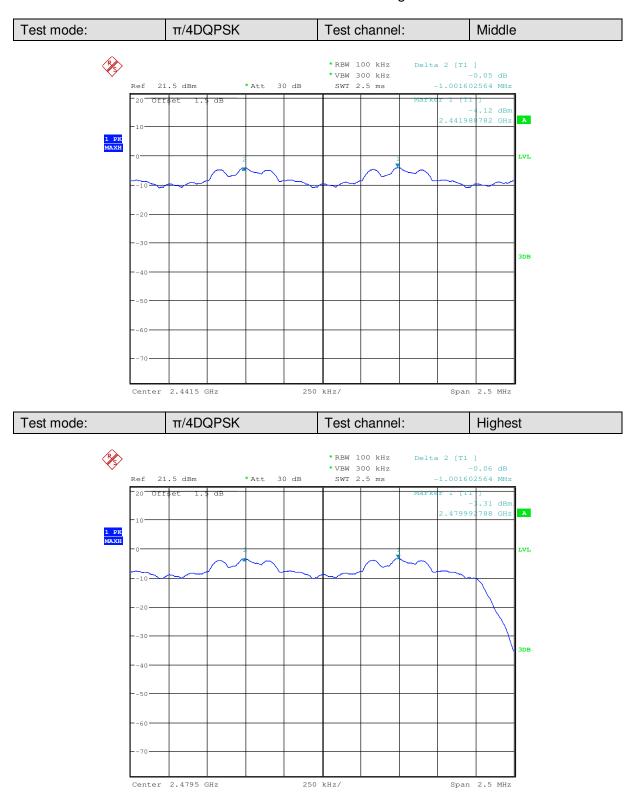




Report No.: SZEM140900529801 Page: 35 of 95

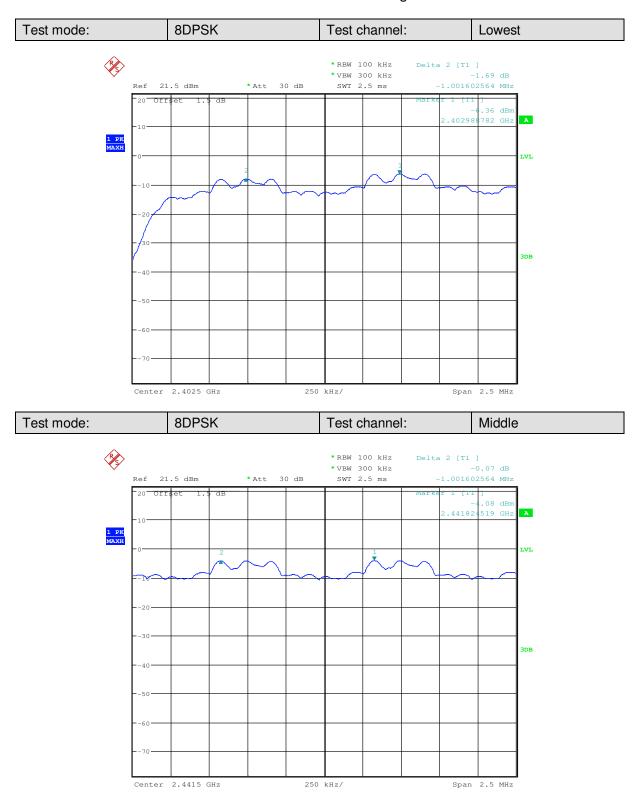



Report No.: SZEM140900529801 Page: 36 of 95

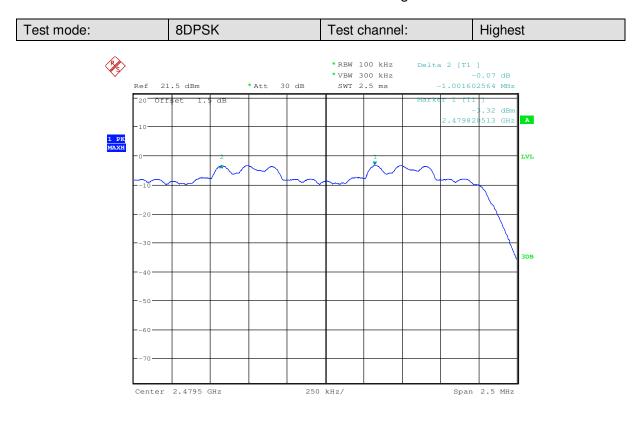



Report No.: SZEM140900529801 Page: 37 of 95

6.6 Hopping Channel Number

Test Requirement:	47 CFR Part 15C Section 15.247 (b)	
Test Method:	ANSI C63.10:2009	
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane	
Limit:	At least 15 channels	
Test Mode:	Hopping transmitting with all kind of modulation	
Instruments Used:	Refer to section 5.10 for details	
Test Results:	Pass	


Measurement Data

Mode	Hopping channel numbers	Limit
GFSK	79	≥15
π/4DQPSK	79	≥15
8DPSK	79	≥15

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM140900529801 Page: 38 of 95

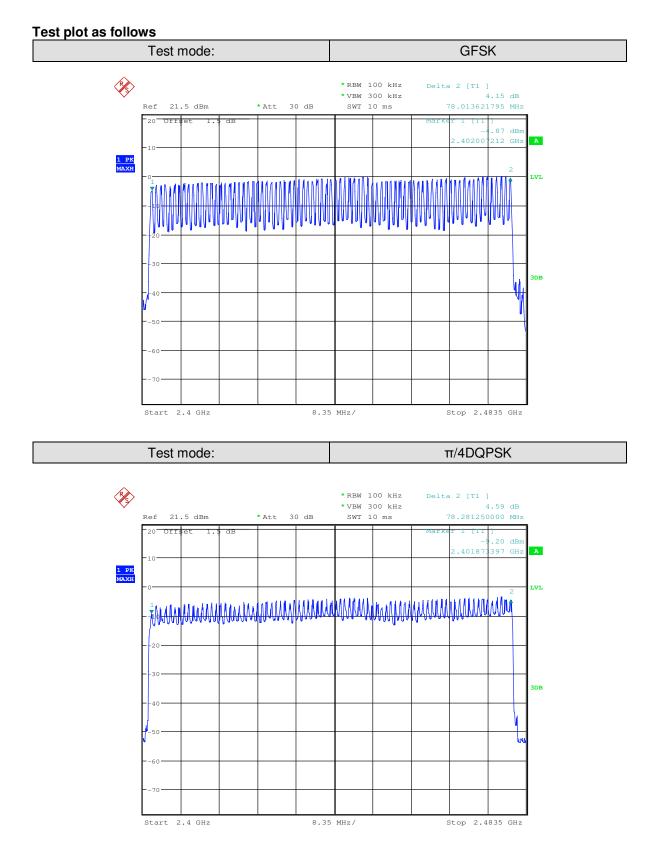



Report No.: SZEM140900529801 Page: 39 of 95

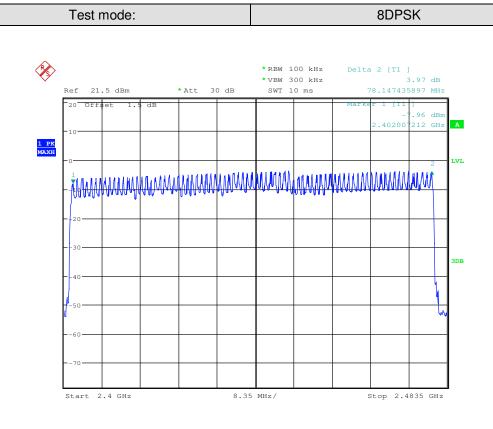



Report No.: SZEM140900529801 Page: 40 of 95

6.7 Dwell Time

Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1)	
Test Method:	ANSI C63.10:2009	
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table	
	Ground Reference Plane	
Instruments Used:	Refer to section 5.10 for details	
Test Mode:	Hopping transmitting with all kind of modulation and all kind of data type.	
Limit:	0.4 Second	
Test Results:	Pass	

Measurement Data

Mode	Packet	Dwell time (second)	Limit (second)
GFSK	DH1	0.129600	0.4
	DH3	0.266080	0.4
	DH5	0.321750	0.4
π/4DQPSK	2-DH1	0.134720	0.4
	2-DH3	0.266080	0.4
	2-DH5	0.275680	0.4
8DPSK	3-DH1	0.133440	0.4
	3-DH3	0.266720	0.4
	3-DH5	0.292900	0.4



Report No.: SZEM140900529801 Page: 41 of 95

Remark:

The test period: T= 0.4 Second/Channel x 79 Channel = 31.6 s

On (ms)*total number=dwell time (ms)

The lowest channel (2402MHz), as below:

DH1 time slot=0.405 (ms)*total number=129.600 (ms)

DH3 time slot=1.663 (ms)* total number = 266.080 (ms)

DH5 time slot=2.925 (ms)* total number =321.750 (ms)

2-DH1 time slot=0.421 (ms)*total number=134.720 (ms)

2-DH3 time slot=1.663 (ms)* total number =266.080 (ms)

2-DH5 time slot=1.723 (ms)* total number = 275.680 (ms)

3-DH1 time slot=0.417 (ms)*total number=133.440 (ms)

3-DH3 time slot=1.667 (ms)* total number = 266.720 (ms)


3-DH5 time slot=2.929 (ms)* total number =292.900 (ms)






Report No.: SZEM140900529801 Page: 42 of 95

Test plot as follows:

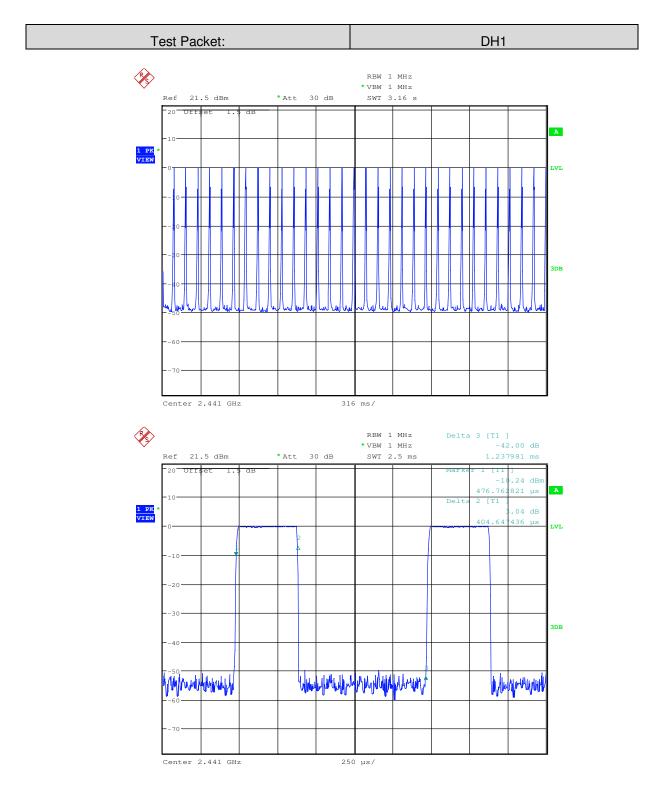




Report No.: SZEM140900529801 Page: 43 of 95

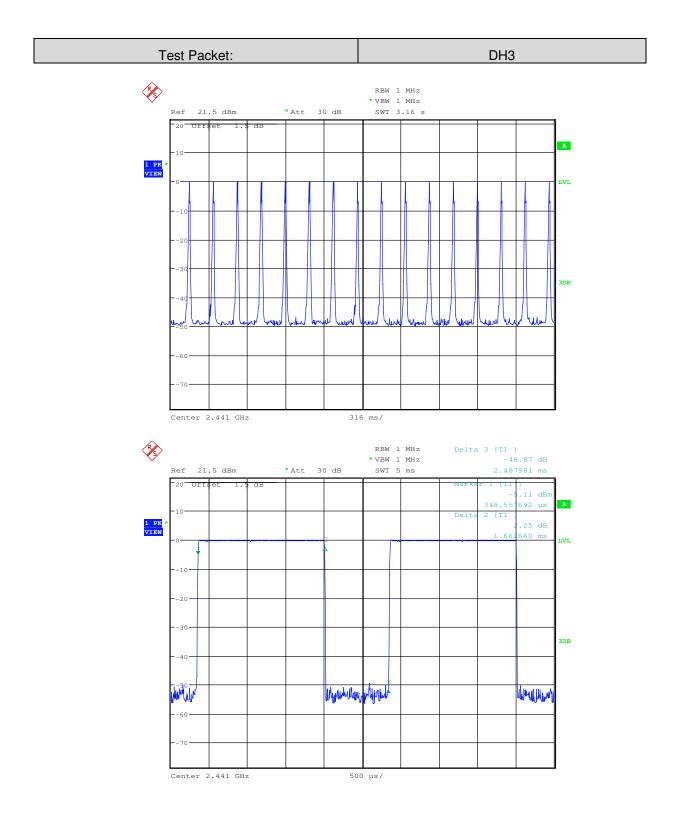




Report No.: SZEM140900529801 Page: 44 of 95

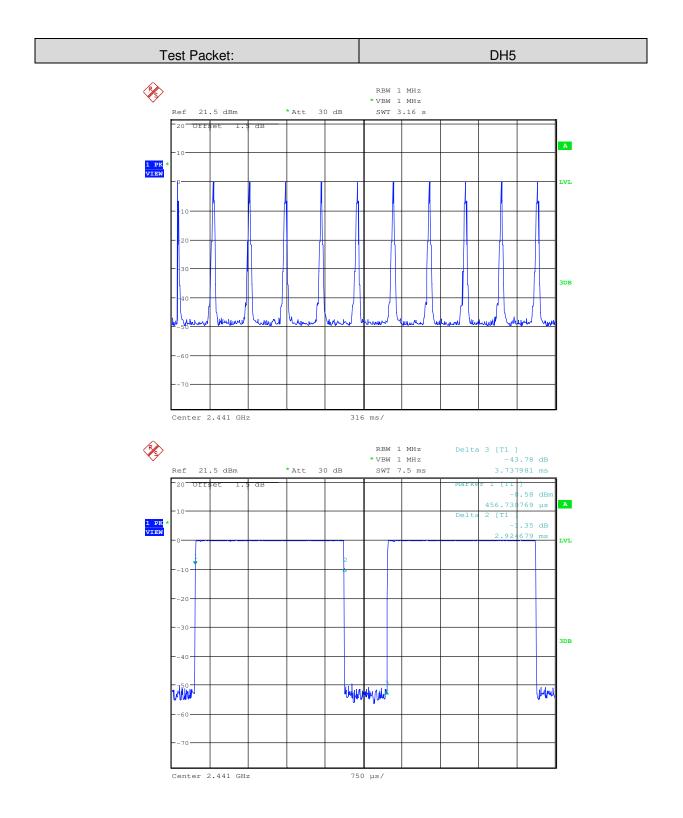




Report No.: SZEM140900529801 Page: 45 of 95

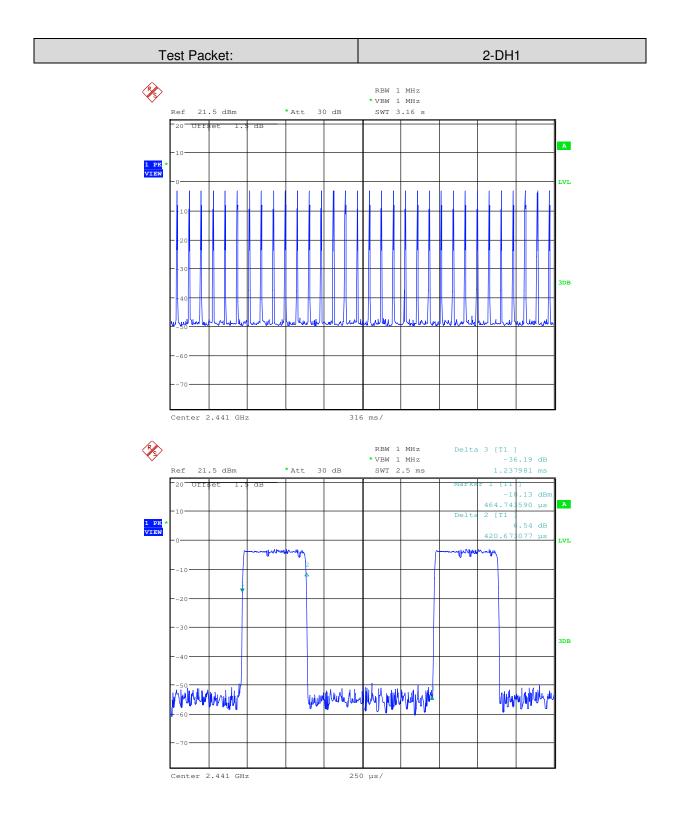




Report No.: SZEM140900529801 Page: 46 of 95

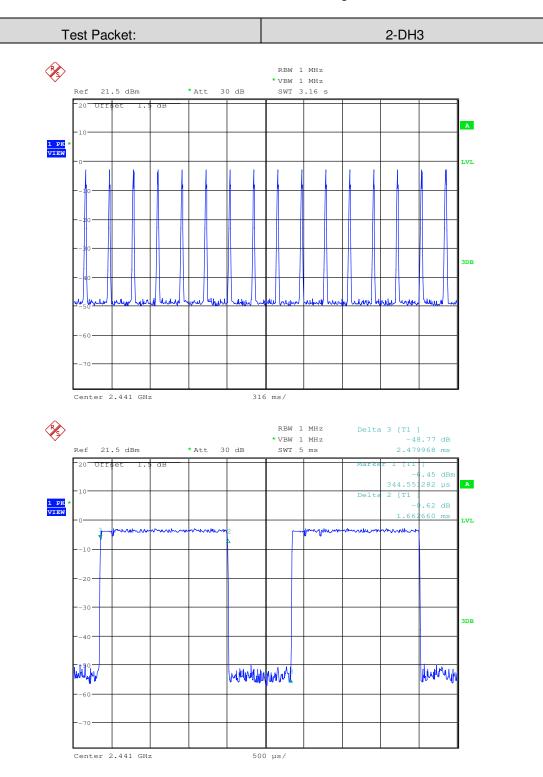




Report No.: SZEM140900529801 Page: 47 of 95

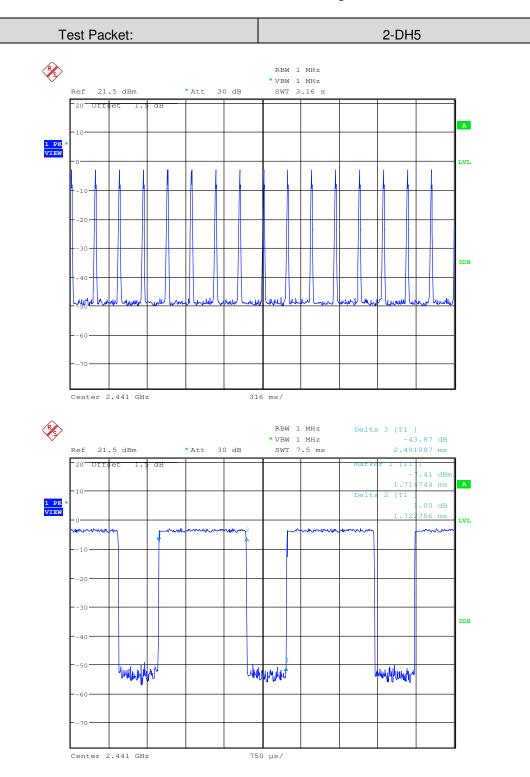




Report No.: SZEM140900529801 Page: 48 of 95

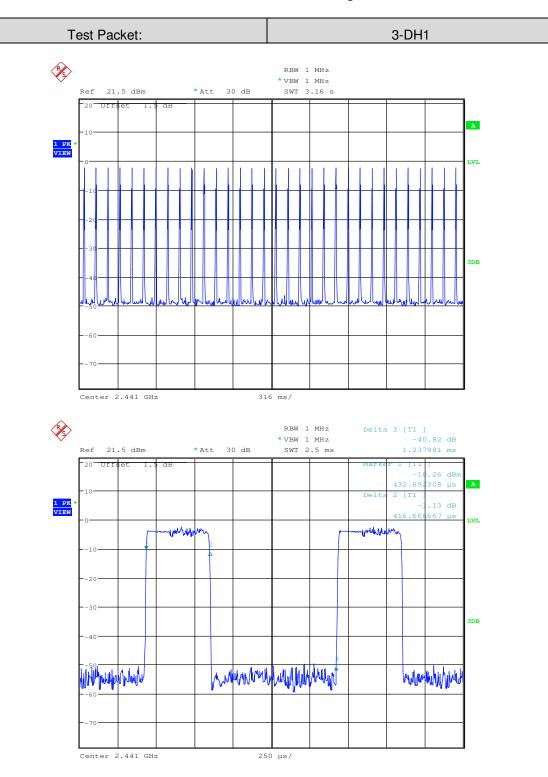




Report No.: SZEM140900529801 Page: 49 of 95

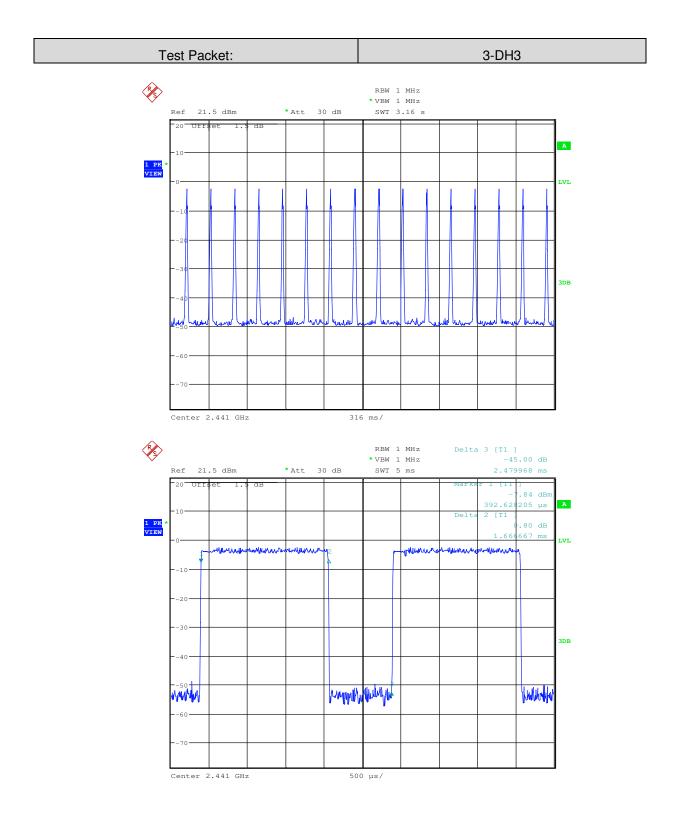



Report No.: SZEM140900529801 Page: 50 of 95

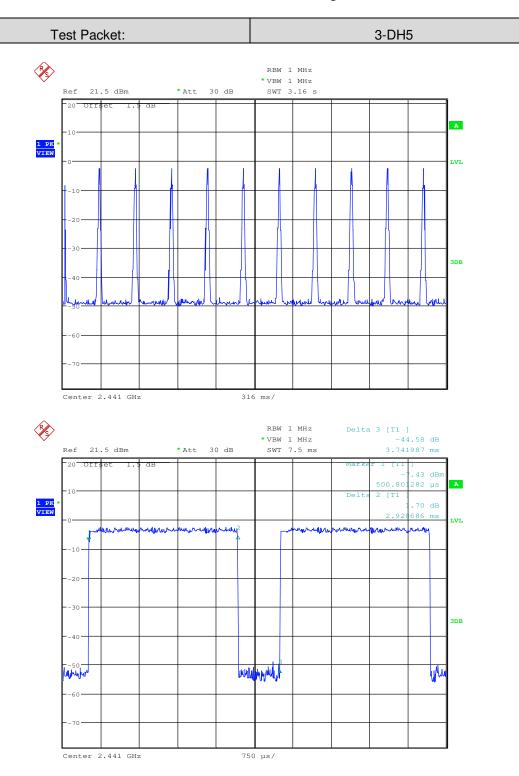



Report No.: SZEM140900529801 Page: 51 of 95


Test Requirement:	47 CFR Part 15C Section 15.247 (d)	
Test Method:	ANSI C63.10:2009	
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table	
	Ground Reference Plane	
	Remark: Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.	
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.	
Exploratory Test Mode:	Hopping transmitting with all kind of modulation and all kind of data type	
Final Test Mode:	Through Pre-scan, find the DH1 of data type is the worse case of GFSK modulation type, 2-DH1 of data type is worse case of π /4DQPSK modulation type, 3-DH1 of data type is worse case of 8DPSK modulation type.	
Instruments Used:	Refer to section 5.10 for details	
Test Results:	Pass	

6.8 Band-edge for RF Conducted Emissions






Report No.: SZEM140900529801 Page: 52 of 95

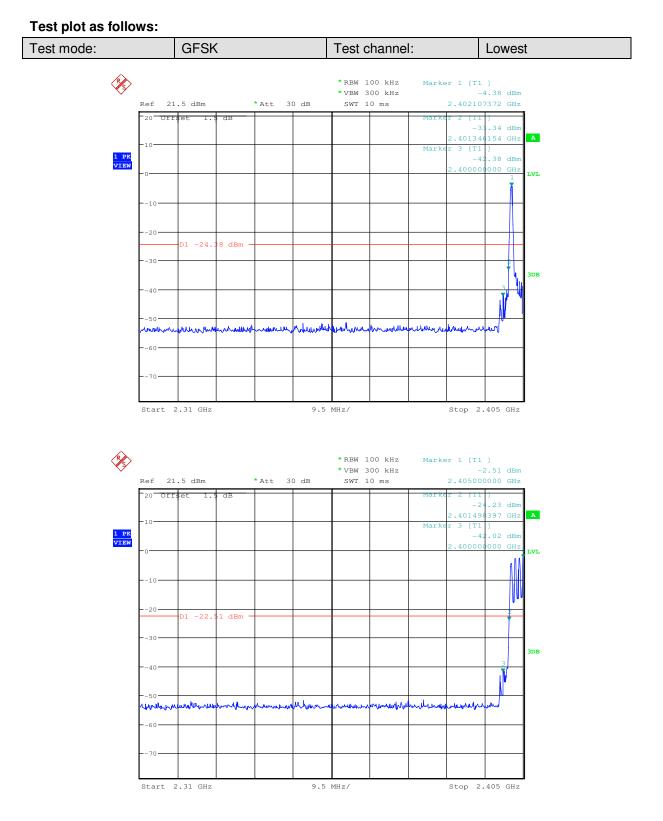




Report No.: SZEM140900529801 Page: 53 of 95

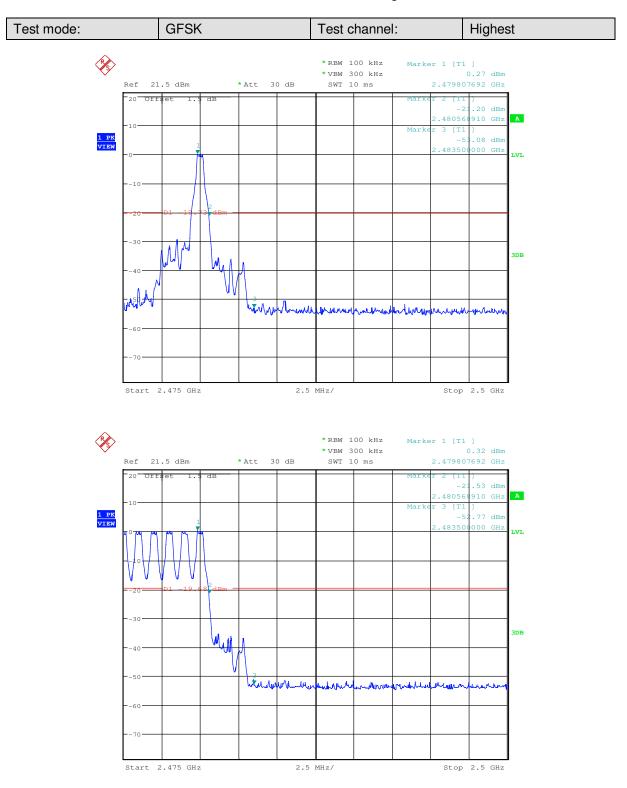




Report No.: SZEM140900529801 Page: 54 of 95

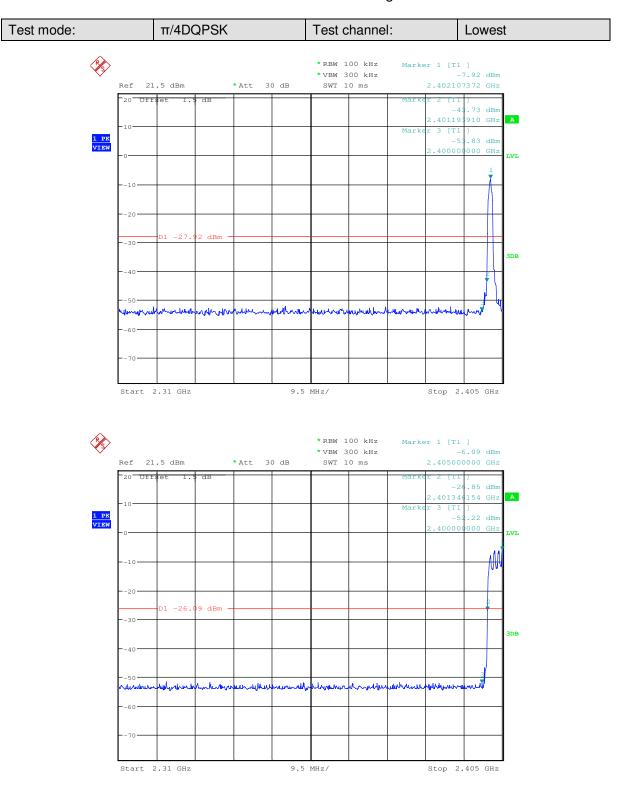




Report No.: SZEM140900529801 Page: 55 of 95

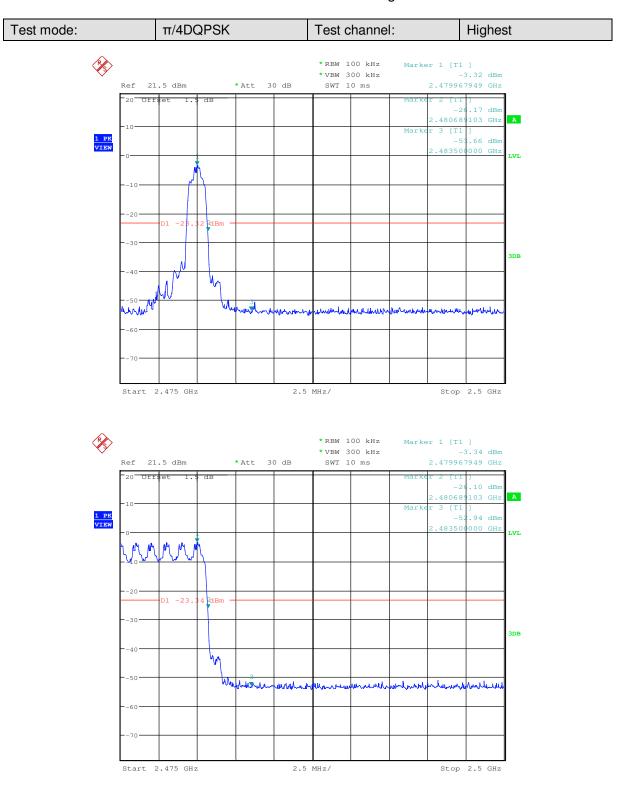




Report No.: SZEM140900529801 Page: 56 of 95

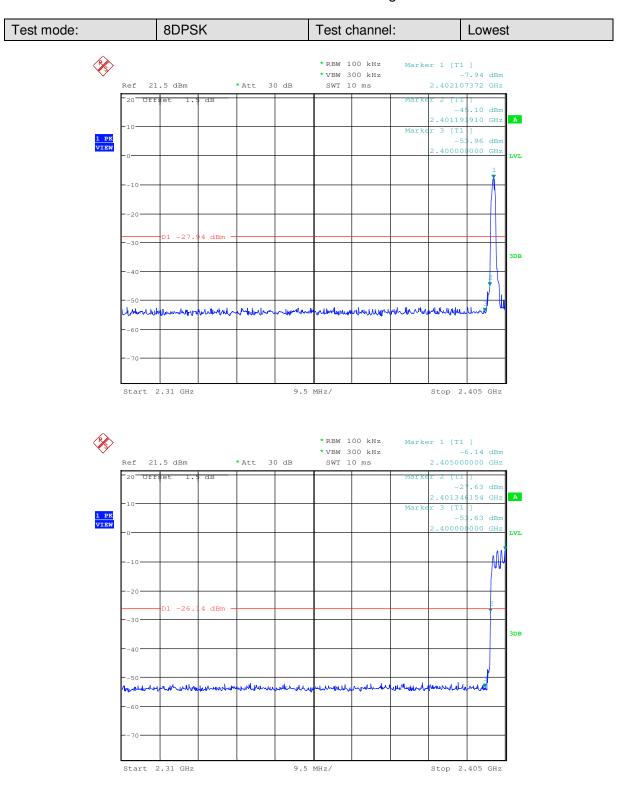



Report No.: SZEM140900529801 Page: 57 of 95

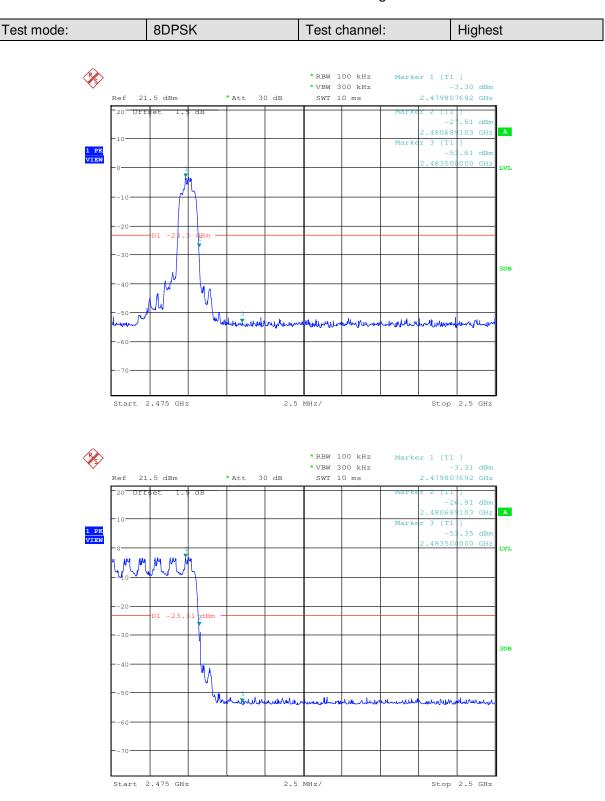



Report No.: SZEM140900529801 Page: 58 of 95


6.9 Spurious RF Conducted Emissions

Test Requirement:	47 CFR Part 15C Section 15.247 (d)	
Test Method:	ANSI C63.10:2009	
Test Setup:	Spectrum Analyzer E-U-T Non-Conducted Table Ground Reference Plane	
	Remark: Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.	
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.	
Exploratory Test Mode:	Non-hopping transmitting with all kind of modulation and all kind of data type	
Final Test Mode:	Through Pre-scan, find the DH1 of data type is the worse case of GFSK modulation type, 2-DH1 of data type is worse case of $\pi/4DQPSK$ modulation type, 3-DH1 of data type is worse case of 8DPSK modulation type.	
Instruments Used:	Refer to section 5.10 for details	
Test Results:	Pass	




Report No.: SZEM140900529801 Page: 59 of 95

Test plot as follows:

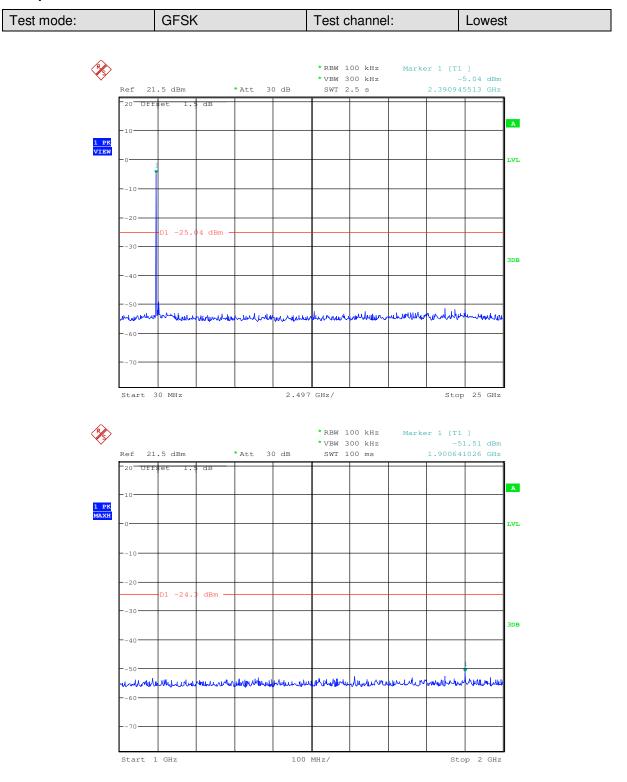




Report No.: SZEM140900529801 Page: 60 of 95

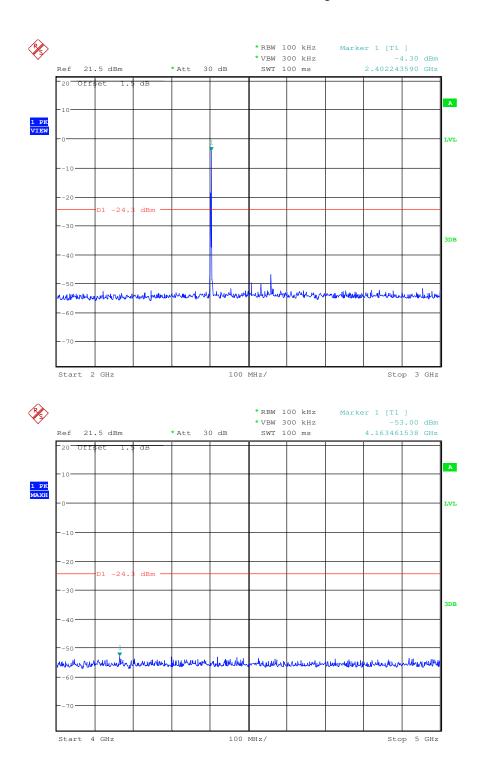




Report No.: SZEM140900529801 Page: 61 of 95

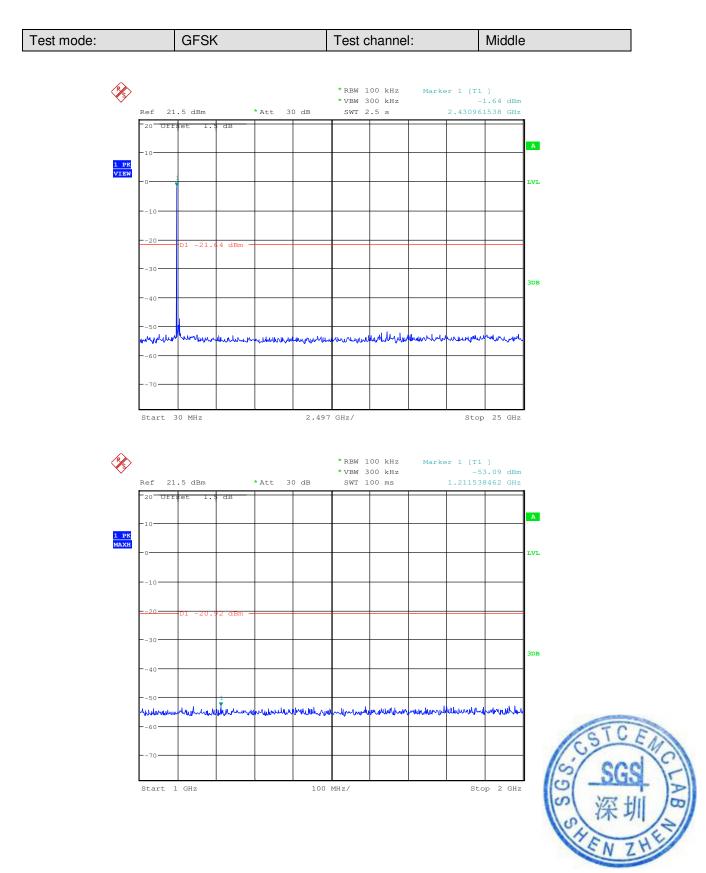




Report No.: SZEM140900529801 Page: 62 of 95

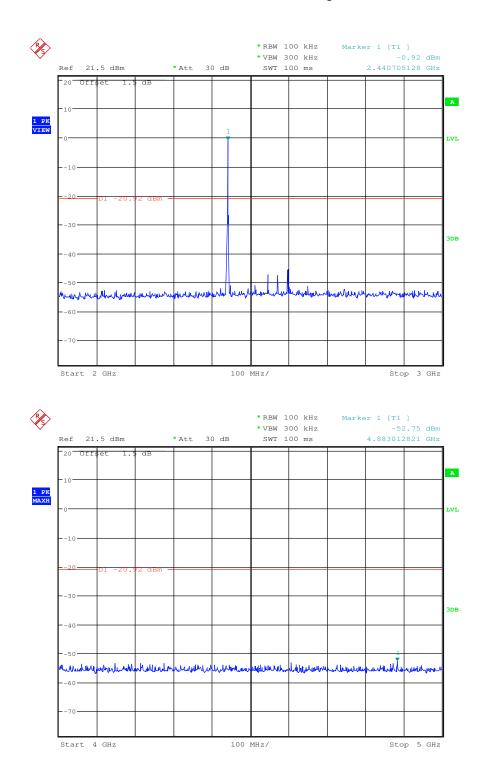




Report No.: SZEM140900529801 Page: 63 of 95

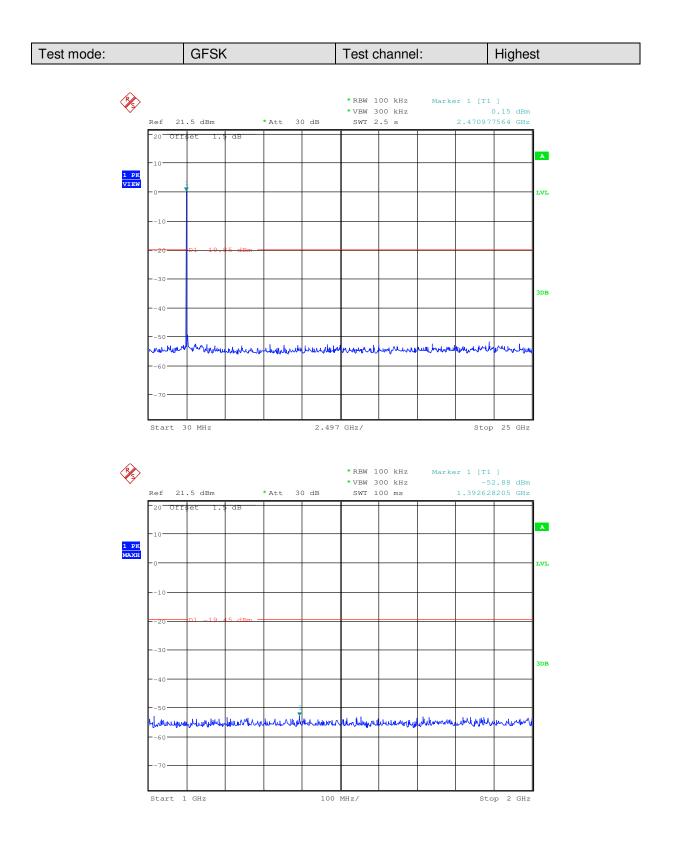




Report No.: SZEM140900529801 Page: 64 of 95

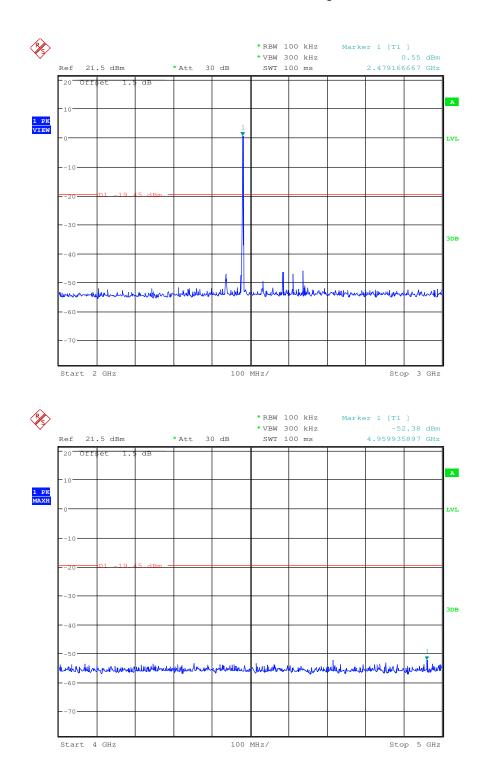




Report No.: SZEM140900529801 Page: 65 of 95

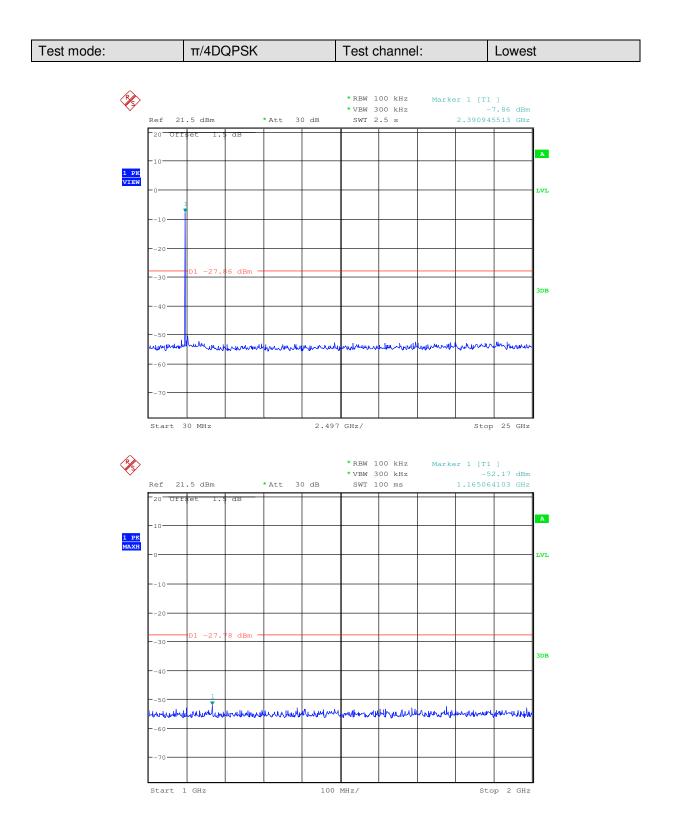




Report No.: SZEM140900529801 Page: 66 of 95

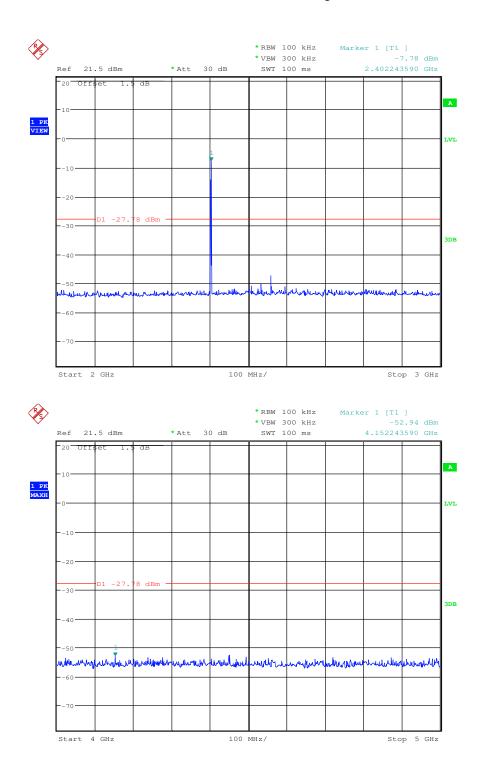




Report No.: SZEM140900529801 Page: 67 of 95

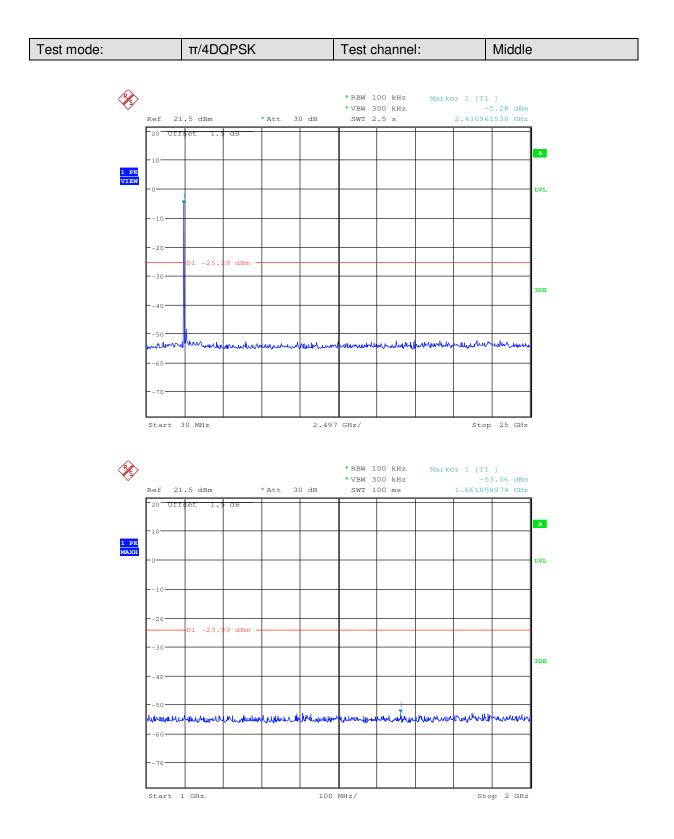




Report No.: SZEM140900529801 Page: 68 of 95

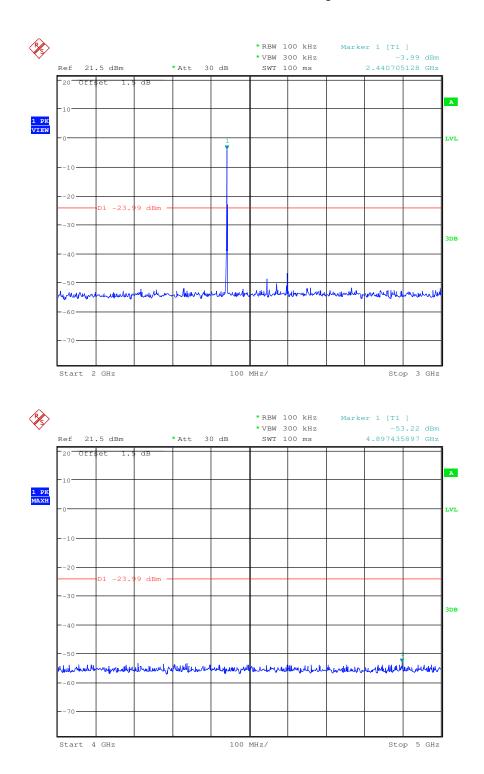




Report No.: SZEM140900529801 Page: 69 of 95

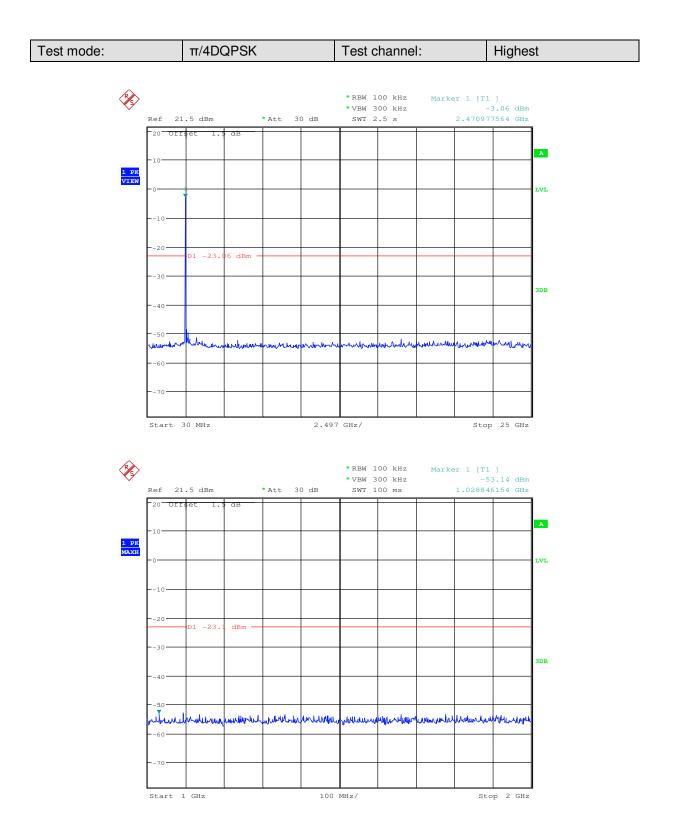




Report No.: SZEM140900529801 Page: 70 of 95

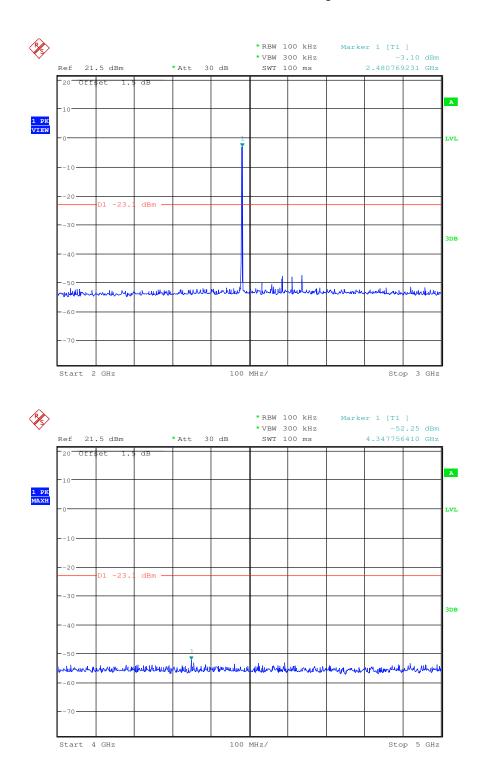




Report No.: SZEM140900529801 Page: 71 of 95

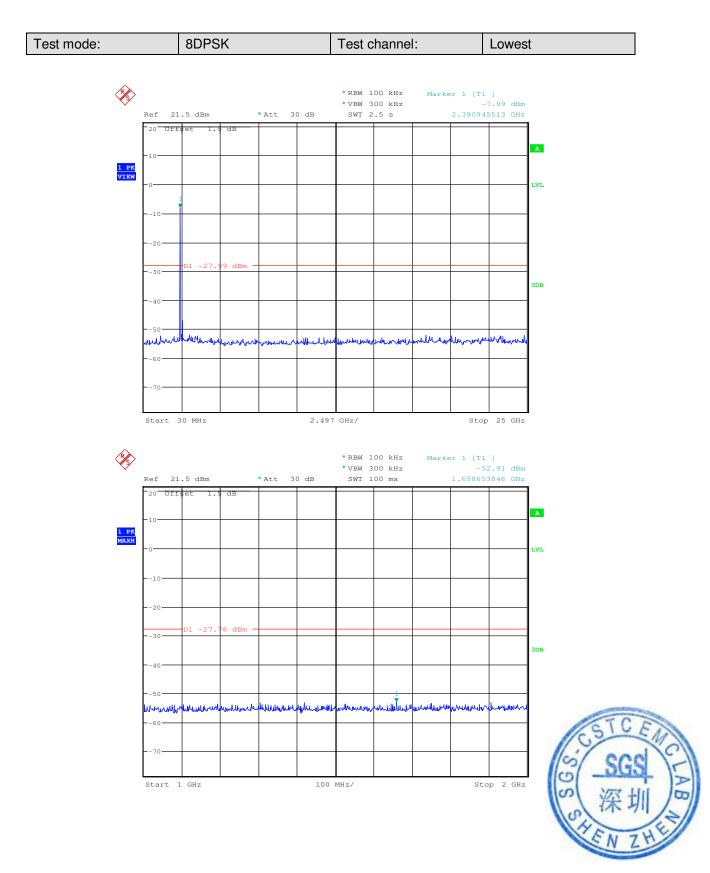




Report No.: SZEM140900529801 Page: 72 of 95

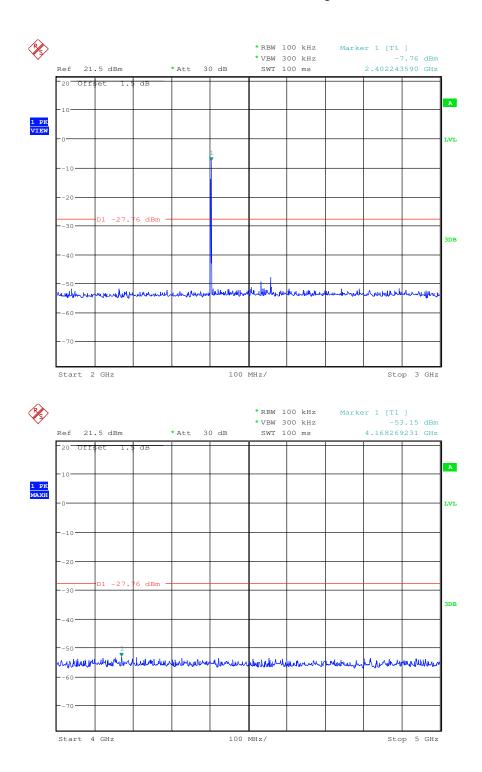




Report No.: SZEM140900529801 Page: 73 of 95

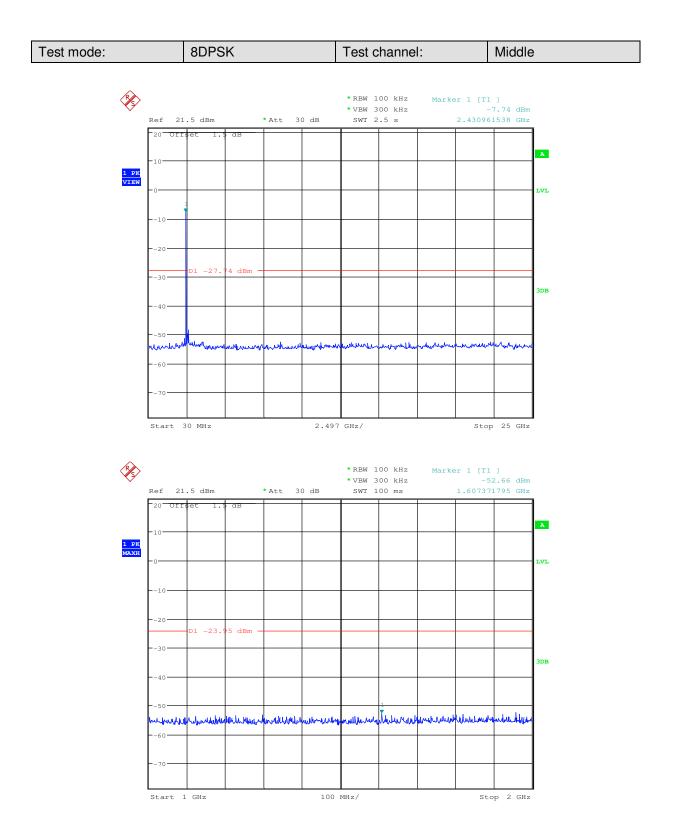




Report No.: SZEM140900529801 Page: 74 of 95

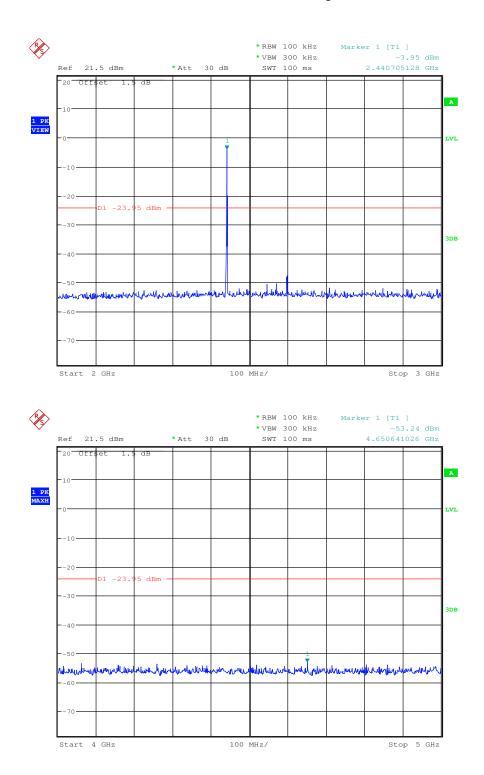



Report No.: SZEM140900529801 Page: 75 of 95

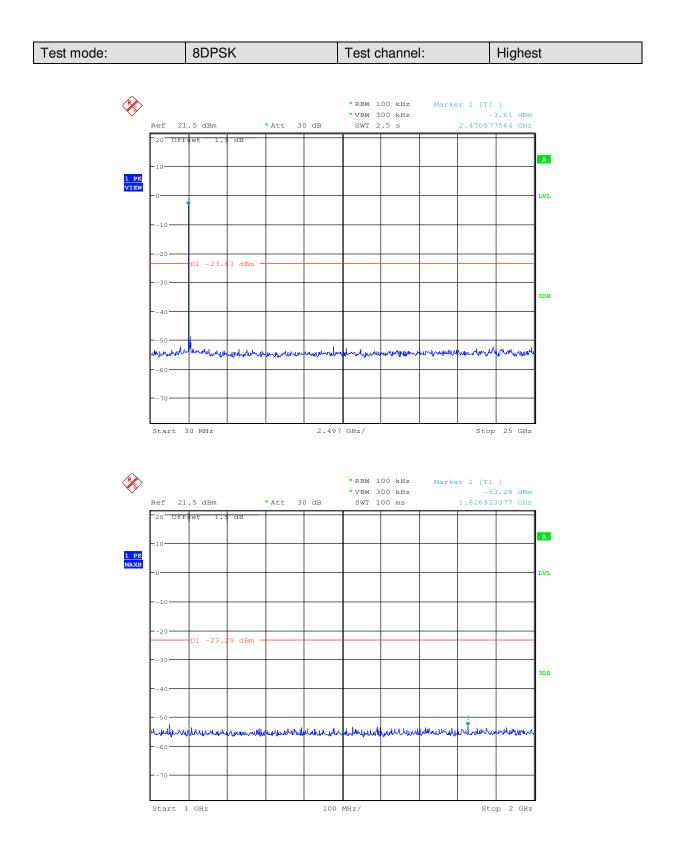



Report No.: SZEM140900529801 76 of 95 Page: × * RBW 100 kHz Marker 1 [T1] *VBW 300 kHz -3.29 dBm 2.479166667 GHz Ref 21.5 dBm * Att 30 dB SWT 100 ms 20 Offset 1.5 dB A 1 PK VIEW JVT. 9 dBm 3DB rd blor black Andre And a unha LANUM a al-Mulanda Start 2 GHz 100 MHz/ Stop 3 GHz ×, *RBW 100 kHz Marker 1 [T1] * VBW 300 kHz -53.18 dBm 100 ms 21.5 dBr 30 dB SWT .376602564 GHz 20. Off А 1 PK MAXH LVL D1 -23. 9 dBm BDB for mala ام افاده 100 MHz/ Stop 5 GHz Start 4 GHz

Remark:

Pretest 9kHz to 25GHz, find the highest point when testing, so only the worst data were shown in the test report. Per FCC Part 15.33 (a) and 15.31 (o) ,The amplitude of spurious emissions from intentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.



Report No.: SZEM140900529801 Page: 77 of 95

6.10Other requirements Frequency Hopping Spread Spectrum System

Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1), (h) requirement:
rate from a Pseudorandom on the average by each tran	nnel frequencies that are selected at the system hopping ordered list of hopping frequencies. Each frequency must be used equally smitter. The system receivers shall have input bandwidths that match the s of their corresponding transmitters and shall shift frequencies in nsmitted signals.
channels during each transm receiver, must be designed transmitter be presented wit employing short transmissio	spectrum systems are not required to employ all available hopping nission. However, the system, consisting of both the transmitter and the to comply with all of the regulations in this section should the h a continuous data (or information) stream. In addition, a system in bursts must comply with the definition of a frequency hopping system missions over the minimum number of hopping channels specified in
the system to recognize othe independently chooses and The coordination of frequence	ence within a frequency hopping spread spectrum system that permits er users within the spectrum band so that it individually and adapts its hopsets to avoid hopping on occupied channels is permitted. cy hopping systems in any other manner for the express purpose of occupancy of individual hopping frequencies by multiple transmitters is
Compliance for section 15	.247(a)(1)
stage shift register whose 5t outputs are added in a modu	ulo-two addition stage. And the result is fed back to the input of the first with the first ONE of 9 consecutive ONEs; i.e. the shift register is initialized ages: 9 sequence: $2^9 - 1 = 511$ bits
Linear Feedback S	hift Register for Generation of the PRBS sequence
-	om Frequency Hopping Sequence as follow:
20 62 46 77	7 64 8 73 16 75 1
	y on the average by each transmitter.
bandwidths that match the	e Specification, Bluetooth receivers are designed to have input and IF hopping channel bandwidths of any Bluetooth transmitters and shift on with the transmitted signals.



Report No.: SZEM140900529801 Page: 78 of 95

Compliance for section 15.247(g)

According to Bluetooth Core Specification, the Bluetooth system transmits the packet with the pseudorandom hopping frequency with a continuous data and the short burst transmission from the Bluetooth system is also transmitted under the frequency hopping system with the pseudorandom hopping frequency system.

Compliance for section 15.247(h)

According to Bluetooth Core specification, the Bluetooth system incorporates with an adaptive system to detect other user within the spectrum band so that it individually and independently to avoid hopping on the occupied channels.

According to the Bluetooth Core specification, the Bluetooth system is designed not have the ability to coordinated with other FHSS System in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitter.

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM140900529801 Page: 79 of 95

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205								
Test Method:	ANSI C63.10: 2009								
Test Site:	Measurement Distance	Measurement Distance: 3m (Semi-Anechoic Chamber)							
Receiver Setup:	Frequency		Detector	RBW	VBW	Remark			
	0.009MHz-0.090MH	z	Peak	10kHz	z 30kHz	Peak			
	0.009MHz-0.090MH	z	Average	10kHz	z 30kHz	Average			
	0.090MHz-0.110MH	z	Quasi-peak	10kHz	z 30kHz	Quasi-peak			
	0.110MHz-0.490MHz Peak		10kHz	z 30kHz	Peak				
	0.110MHz-0.490MHz Average 1		10kHz	z 30kHz	Average				
	0.490MHz -30MHz Quasi-peak		10kHz	z 30kHz	Quasi-peak				
	30MHz-1GHz	30MHz-1GHz		100 kH	lz 300kHz	Quasi-peak			
			Peak	1MHz	z 3MHz	Peak			
	Above 1GHz		Peak	1MHz	z 10Hz	Average			
Limit:	Frequency		eld strength crovolt/meter)	Limit (dBuV/m)	Remark	Measuremen distance (m)			
	0.009MHz-0.490MHz	2	400/F(kHz)	-	-	300			
	0.490MHz-1.705MHz	24	4000/F(kHz)	-	-	30			
	1.705MHz-30MHz		30	-	-	30			
	30MHz-88MHz		100	40.0	Quasi-peak	3			
	88MHz-216MHz		150	43.5	Quasi-peak	3			
	216MHz-960MHz		200	46.0	Quasi-peak	3			
	960MHz-1GHz		500	54.0	Quasi-peak	3			
	Above 1GHz		500	54.0	Average	3			
	Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequence emissions is 20dB above the maximum permitted average emission I applicable to the equipment under test. This peak limit applies to the peak emission level radiated by the device.								

6.11 Radiated Spurious Emission



Report No.: SZEM140900529801 Page: 80 of 95

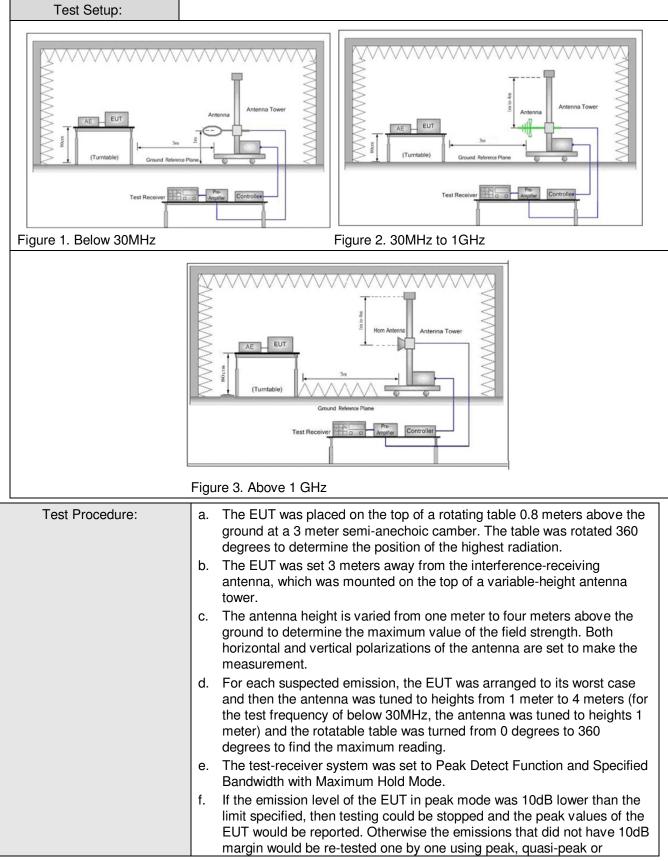



Report No.: SZEM140900529801 Page: 81 of 95

	 average method as specified and then reported in a data sheet. g. Test the EUT in the lowest channel (2402MHz),the middle channel (2441MHz),the Highest channel (2480MHz) h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case. i. Report above precedures until all frequencies measured was complete. 				
Exploratory Test Mode:	 Repeat above procedures until all frequencies measured was complete. Non-hopping transmitting mode with all kind of modulation and all kind of 				
	data type Transmitting mode				
Final Test Mode:	Through Pre-scan, find the DH1 of data type is the worse case of GFSK modulation type. Only the worst case is recorded in the report.				
Instruments Used:	Refer to section 5.10 for details				
Test Results:	Pass				






Report No.: SZEM140900529801 Page: 82 of 95

6.11.1 Radiated Emission below 1GHz

30MHz~1GHz (QP)		
Test mode:	Transmitting mode	Vertical

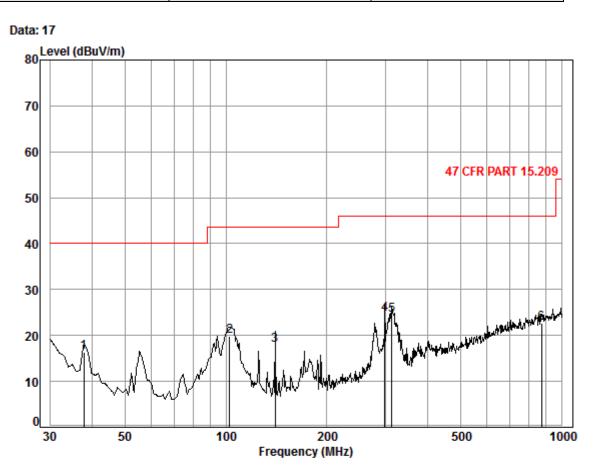



Condition: 47 CFR PART 15.209 3m 3142C VERTICAL Job No. : 5298RF Test mode: TX mode

	Freq	Cable Loss		Preamp Factor		Level		Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 2	37.81 102.72	0.60 1.21	8.96	27.33 27.18	36.84	19.83	43.50	-23.67
3 4	140.34 297.22	1.30 1.89	13.78	26.95 26.41	35.45	24.71	46.00	-21.29
5 6	312.18 872.18	1.94 3.49		26.50 26.92				



Report No.: SZEM140900529801 Page: 83 of 95



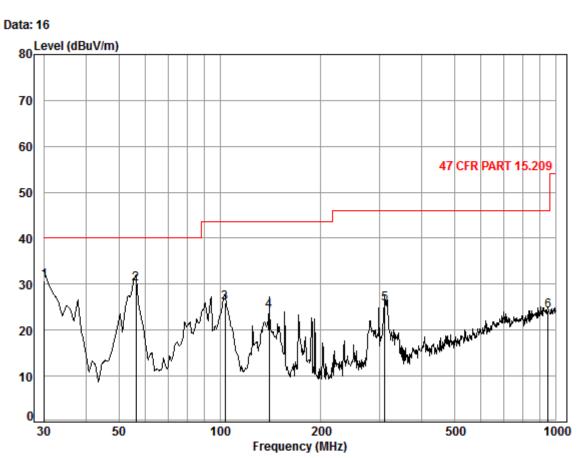

Condition: 47 CFR PART 15.209 3m 3142C HORIZONTAL Job No. : 5298RF Test mode: TX mode

Cable Ant Preamp Limit 0ver Read Freq Loss Factor Factor Level Line Limit Level dBuV dBuV/m dBuV/m MHz dB dB/m dB dB -9.19 1 30.00 0.60 18.70 27.36 38.87 30.81 40.00 2 56.20 0.80 7.74 27.27 48.80 30.07 40.00 -9.93 3 103.81 8.90 27.17 43.05 25.99 43.50 -17.51 1.21 4 140.34 1.30 8.13 26.95 41.77 24.25 43.50 -19.25 5 310.00 1.93 14.27 26.48 35.98 25.70 46.00 -20.30 948.76 23.30 26.54 23.74 24.15 46.00 -21.85 6 3.65



Report No.: SZEM140900529801 Page: 84 of 95

Worse case r	mode: 0	GFSK(DH1)	Test	channel:	Lowest	Rema	ark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
3436.944	4.72	32.82	38.71	45.71	44.54	74.00	-29.46	Vertical
4804.000	5.63	34.70	39.24	48.62	49.71	74.00	-24.29	Vertical
6017.064	6.68	36.28	39.18	46.85	50.63	74.00	-23.37	Vertical
7206.000	6.80	35.63	39.07	45.48	48.84	74.00	-25.16	Vertical
9608.000	8.94	37.33	37.93	42.88	51.22	74.00	-22.78	Vertical
11872.880	9.36	38.57	38.64	44.37	53.66	74.00	-20.34	Vertical
3728.625	5.00	33.10	38.84	46.11	45.37	74.00	-28.63	Horizontal
4804.000	5.63	34.70	39.24	47.17	48.26	74.00	-25.74	Horizontal
6078.644	6.56	36.21	39.18	46.76	50.35	74.00	-23.65	Horizontal
7206.000	6.80	35.63	39.07	44.98	48.34	74.00	-25.66	Horizontal
9608.000	8.94	37.33	37.93	43.53	51.87	74.00	-22.13	Horizontal
11692.920	9.44	38.39	38.56	43.68	52.95	74.00	-21.05	Horizontal

6.11.2 Transmitter Emission above 1GHz

Worse case	mode:	GFSK(DH1)) Test	channel:	Middle	Rem	ark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
3525.555	4.95	32.92	38.75	45.76	44.88	74.00	-29.12	Vertical
4882.000	5.61	34.78	39.26	48.60	49.73	74.00	-24.27	Vertical
6017.064	6.68	36.28	39.18	46.84	50.62	74.00	-23.38	Vertical
7323.000	6.73	35.50	39.06	45.88	49.05	74.00	-24.95	Vertical
9764.000	8.84	37.81	37.84	44.39	53.20	74.00	-20.80	Vertical
11933.470	9.34	38.63	38.67	44.33	53.63	74.00	-20.37	Vertical
3728.625	5.00	33.10	38.84	45.97	45.23	74.00	-28.77	Horizontal
4882.000	5.61	34.78	39.26	47.25	48.38	74.00	-25.62	Horizontal
6078.644	6.56	36.21	39.18	46.71	50.30	74.00	-23.70	Horizontal
7323.000	6.73	35.50	39.06	45.32	48.49	74.00	-25.51	Horizontal
9764.000	8.84	37.81	37.84	42.67	51.48	74.00	-22.52	Horizontal
11812.580	9.39	38.51	38.61	44.32	53.61	74.00	-20.39	Horizontal



Report No.: SZEM140900529801 Page: 85 of 95

Worse case	mode:	GFSK(DH1)) Te	st channel:	Highest	Rem	nark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
3709.691	5.02	33.08	38.83	45.83	45.10	74.00	-28.90	Vertical
4960.000	5.60	34.86	39.29	46.25	47.42	74.00	-26.58	Vertical
5986.509	6.63	36.27	39.19	46.65	50.36	74.00	-23.64	Vertical
7440.000	6.72	35.43	39.05	45.42	48.52	74.00	-25.48	Vertical
9920.000	9.19	38.27	37.75	42.58	52.29	74.00	-21.71	Vertical
12117.140	9.11	38.85	38.80	44.49	53.65	74.00	-20.35	Vertical
3728.625	5.00	33.10	38.84	45.87	45.13	74.00	-28.87	Horizontal
4960.000	5.60	34.86	39.29	45.88	47.05	74.00	-26.95	Horizontal
6078.644	6.56	36.21	39.18	47.44	51.03	74.00	-22.97	Horizontal
7440.000	6.72	35.43	39.05	45.60	48.70	74.00	-25.30	Horizontal
9920.000	9.19	38.27	37.75	41.93	51.64	74.00	-22.36	Horizontal
12241.140	8.91	39.00	38.91	44.17	53.17	74.00	-20.83	Horizontal

Remark:

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor

2) Scan from 9kHz to 25GHz, the disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.



Report No.: SZEM140900529801 Page: 86 of 95

6.12 Restricted bands around fundamental frequency

Test Requirement: 47 CFR Part 15C Section 15.209 and 15.205								
Test Method:		ANSI C63.10: 2009						
Test Site:	Measurement Distance: 3m	(Semi-Anechoic Chambe	r)					
Limit:	Frequency	Limit (dBuV/m @3m)	Remark					
	30MHz-88MHz	40.0	Quasi-peak Value					
	88MHz-216MHz	43.5	Quasi-peak Value					
	216MHz-960MHz	46.0	Quasi-peak Value					
	960MHz-1GHz	54.0	Quasi-peak Value					
	Above 1GHz	54.0	Average Value					
		74.0	Peak Value					
Test Setup:								
AE EUT (Turntable) Ground Reference Pla Test Receiver		AE EUT AE EUT (Turntable) Ground Reference Plu Test Receiver	Horn Antenna Tower					
Figure 1. 30MHz to 1GHz	Fig	ure 2. Above 1 GHz						




Report No.: SZEM140900529801 Page: 87 of 95

Test Procedure:	 a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation. b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel g. Test the EUT in the lowest channel , the Highest channel h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case. i. Repeat above procedures until all frequencies measured was complete.
Exploratory Test Mode:	Non-hopping transmitting mode with all kind of modulation and all kind of
	data type
	Transmitting mode
Final Test Mode:	Through Pre-scan, find the DH5 of data type is the worse case of
	GFSK modulation type.
	Only the worst case is recorded in the report.
Instruments Used:	Refer to section 5.10 for details
Test Results:	Pass

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM140900529801 Page: 88 of 95

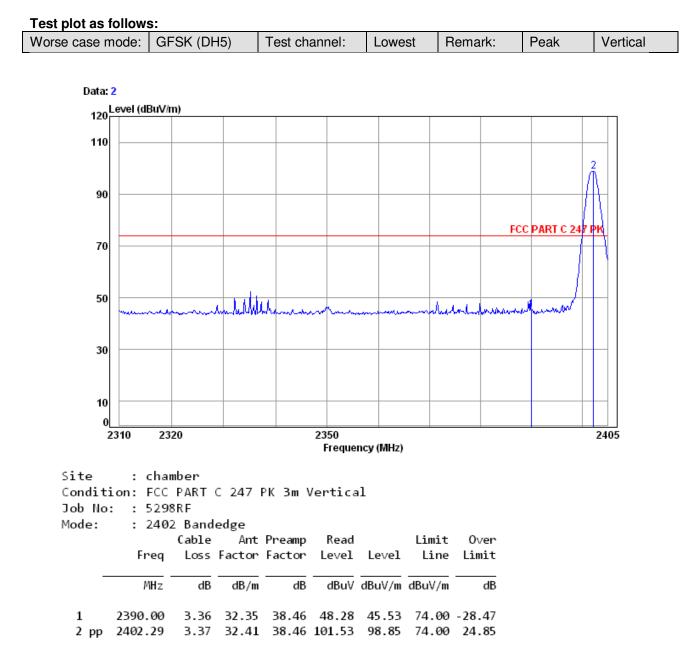



Report No.: SZEM140900529801 Page: 89 of 95


Worse case mode: GFSK (DH5)	Test channel:	Lowest	Remark:	Peak	Horizontal	l
-----------------------------	---------------	--------	---------	------	------------	---

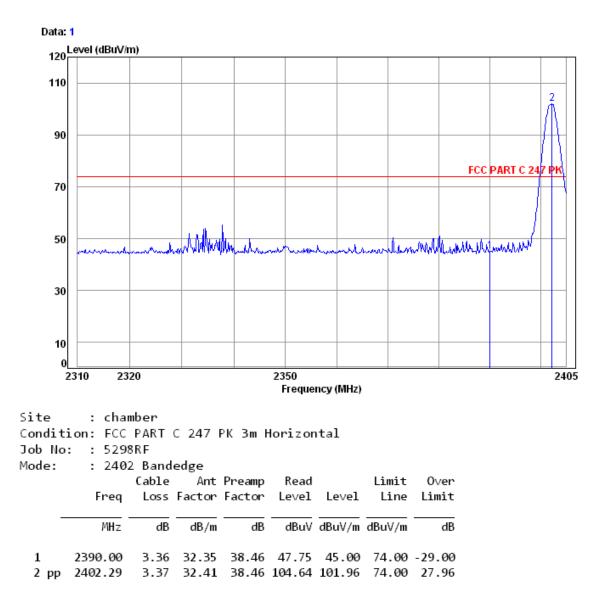



Report No.: SZEM140900529801 Page: 90 of 95


Worse case mode:	GFSK (DH5)	Test channel:	Lowest	Remark:	Average	Vertical
------------------	------------	---------------	--------	---------	---------	----------

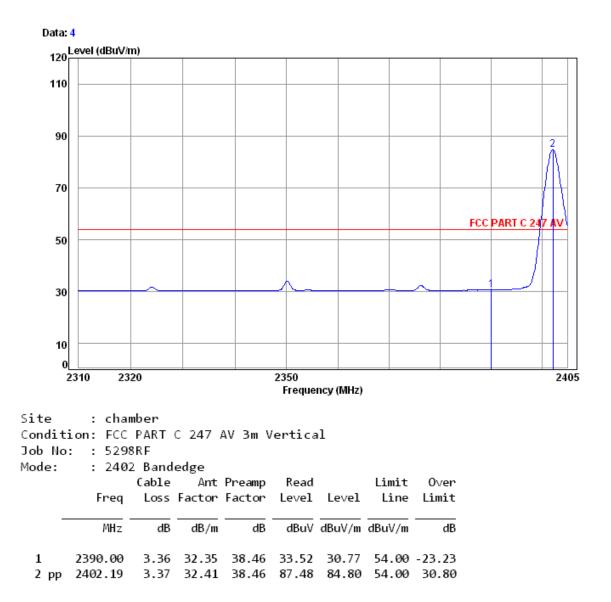



Report No.: SZEM140900529801 Page: 91 of 95

Worse case mode:	GFSK (DH5)	Test channel:	Lowest	Remark:	Average	Horizontal	
------------------	------------	---------------	--------	---------	---------	------------	--

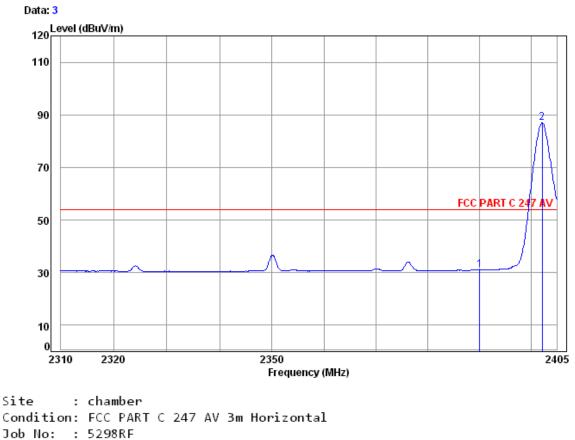

Mode:	2402	Bandedge
noue.	Z40Z	Danueuge


	Freq			Preamp Factor				
_	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 2 pp	2390.00 2402.19							





Report No.: SZEM140900529801 Page: 92 of 95

Worse case mode:	GFSK (DH5)	Test channel:	Highest	Remark:	Peak	Vertical	
------------------	------------	---------------	---------	---------	------	----------	--

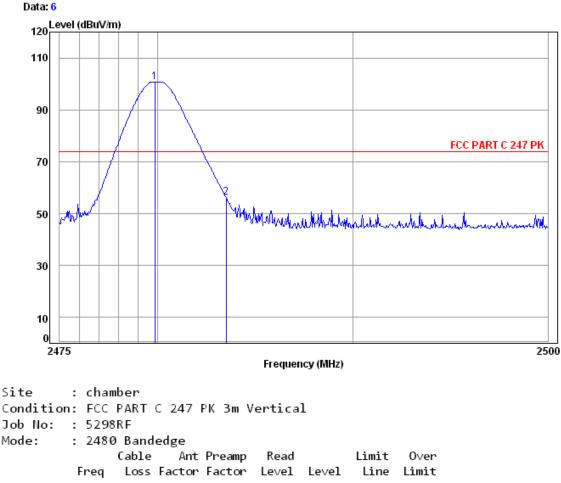


1 pp 2479.86 3.46 32.44 38.47 103.43 100.86 74.00 26	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
2 2483.50 3.47 32.44 38.47 58.96 56.40 74.00 -17								



Report No.: SZEM140900529801 Page: 93 of 95

Worse case mode: GFS	SK (DH5) Test channel:	Highest	Remark:	Peak	Horizontal	1
----------------------	------------------------	---------	---------	------	------------	---

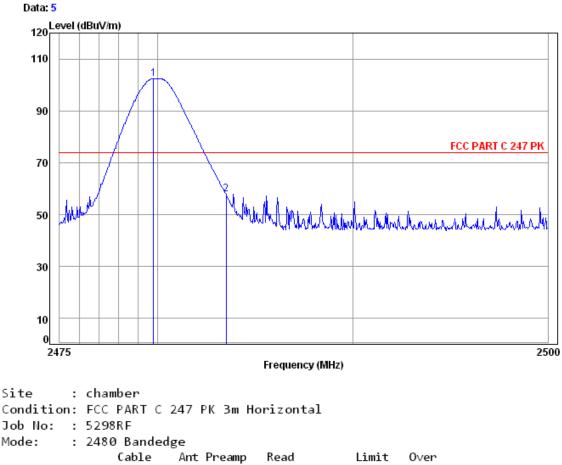


	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
-	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp 2	2479.81 2483.50							



Report No.: SZEM140900529801 Page: 94 of 95

Worse case mode:	GFSK (DH5)	Test channel:	Highest	Remark:	Average	Vertical
------------------	------------	---------------	---------	---------	---------	----------

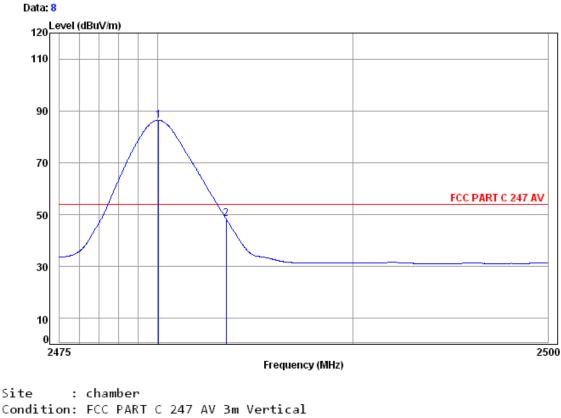


Condit	ion: FCC	PART	C 247 /	AV 3m	Vertica	1		
Job No	: : 529	8RF						
Mode:	: 248	0 Band	edge					
		Cable	Ant	Preamp	o Read		Limit	0∨er
	Freq	Loss	Factor	Factor	' Level	Level	Line	Limit
_								
	MHz	dB	dB/m	dB	3 dBuV	dBuV/m	dBuV/m	dB
1 pp	2480.06	3.46	32.44	38.47	88.99	86.42	54.00	32.42
2	2483.50	3.47	32.44	38.47	51.06	48.50	54.00	-5.50



Report No.: SZEM140900529801 Page: 95 of 95

Worse case mode:	GFSK (DH5)	Test channel:	Highest	Remark:	Average	Horizontal	
------------------	------------	---------------	---------	---------	---------	------------	--

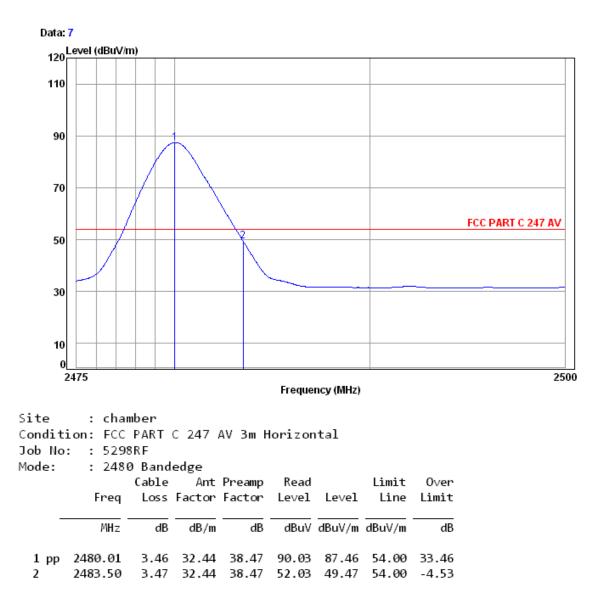

Note:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor