



FCC PART 27
FCC PART 22H, PART 24E
MEASUREMENT AND TEST REPORT

For

DDM Brands LLC

2323 NW, 82ND Ave. Doral, Florida, U.S.A 33122

FCC ID: A4J45ELTE

Report Type: Original Report	Product Type: 4G Mobile Phone
Report Number: RSZ161009002-00D	
Report Date: 2016-11-29	
Oscar Ye	
Reviewed By: Engineer	
Prepared By:	Bay Area Compliance Laboratories Corp. (Kunshan) Chenghu Road, Kunshan Development Zone No.248, Kunshan, Jiangsu, China Tel: +86-0512-86175000 Fax: +86-0512-88934268 www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the equipment described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp.

TABLE OF CONTENTS

GENERAL INFORMATION.....	3
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	3
OBJECTIVE	3
RELATED SUBMITTAL(S)/GRANT(S).....	3
TEST METHODOLOGY	3
MEASUREMENT UNCERTAINTY	4
TEST FACILITY	4
SYSTEM TEST CONFIGURATION	5
JUSTIFICATION	5
EQUIPMENT MODIFICATIONS	5
SUPPORT EQUIPMENT LIST AND DETAILS	5
BLOCK DIAGRAM OF TEST SETUP	5
SUMMARY OF TEST RESULTS	6
TEST EQUIPMENT LIST	7
FCC §1.1307(B) & §2.1093 - RF EXPOSURE INFORMATION.....	8
APPLICABLE STANDARD	8
TEST RESULT	8
FCC §2.1047 - MODULATION CHARACTERISTIC	9
§2.1046; § 22.913 (A); § 24.232 (C); §27.50 (C) (D) (H) - RF OUTPUT POWER.....	10
APPLICABLE STANDARDS.....	10
TEST PROCEDURE	10
TEST DATA	10
FCC §2.1049, §22.917, §22.905 & §24.238 & §27.53 - OCCUPIED BANDWIDTH	27
APPLICABLE STANDARDS.....	27
TEST PROCEDURE	27
TEST DATA	27
§ 2.1051; § 22.917 (A); § 24.238 (A); §27.53 (H) (M) SPURIOUS EMISSIONS AT ANTENNA TERMINALS	61
APPLICABLE STANDARDS.....	61
TEST PROCEDURE	61
TEST DATA	61
FCC § 2.1053; § 22.917 (A); § 24.238 (A); §27.53 (H) (M) SPURIOUS RADIATED EMISSIONS.....	84
APPLICABLE STANDARDS.....	84
TEST PROCEDURE	84
TEST DATA	84
FCC § 22.917 (A);§ 24.238 (A); §27.53 (H)(M) - BAND EDGES	87
APPLICABLE STANDARDS.....	87
TEST PROCEDURE	87
TEST DATA	87
FCC § 2.1055; § 22.355; § 24.235; §27.54; - FREQUENCY STABILITY	122
APPLICABLE STANDARDS.....	122
TEST PROCEDURE	122
TEST DATA	123

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *DDM Brands LLC's* product, model number: *4.5E LTE (FCC ID: A4J45ELTE)* or the "EUT" in this report was a *4G Mobile phone*, which was measured approximately: 13.3 cm (L) × 6.7 cm (W) × 0.9 cm (H), rated with input voltage: DC 3.7 V battery or DC 5.0 V from adapter.

Adapter Information:

Model: TPA-90C050050UU

Input: AC 100-240V, 50-60Hz, 0.2A

Output: DC 5.0V, 0.7A

Notes: For the product, series model AM45EL133, AC45EL133 and 4.5E LTE are identical schematics, the differences between them is just the model number due to marketing purpose and different shell (front appearance). 4.5E LTE was selected for fully testing, which was explained in the attached product similarity declaration letter.

**All measurement and test data in this report was gathered from production sample serial number: 1603368. (Assigned by BACL, Kunshan). The EUT supplied by the applicant was received on 2016-10-09.*

Objective

This type approval report is prepared on behalf of *DDM Brands LLC* in accordance with Part 2, Part 22-Subpart H, Part 24-Subpart E and Part 27 of the Federal Communication Commission's rules.

The objective is to determine the compliance of EUT with FCC rules for output power, modulation characteristic, occupied bandwidth, and spurious emission at antenna terminal, spurious radiated emission, frequency stability, and band edge.

Related Submittal(s)/Grant(s)

FCC Part 15B JBP, Part 15.247 DSS & DTS submissions with FCC ID: A4J45ELTE.

Test Methodology

All tests and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47 Part 2, Sub-Part J as well as the following parts:

Part 22 Subpart H - Public Mobile Services

Part 24 Subpart E - Personal Communication Services

Part 27 – Miscellaneous wireless communications services

Applicable Standards: TIA/EIA 603-D.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Kunshan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Item		Uncertainty
AC Power Lines Conducted Emissions		± 3.26 dB
RF conducted test with spectrum		± 0.9 dB
RF Output Power with Power meter		± 0.5 dB
Radiated emission	30MHz~1GHz	± 5.91 dB
	Above 1G	± 4.92 dB
Occupied Bandwidth		± 0.5 kHz
Temperature		± 1.0 °C
Humidity		$\pm 6\%$

Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the Chenghu Lake Road, Kunshan Development Zone No.248, Kunshan, Jiangsu, China

Test site at Bay Area Compliance Laboratories Corp. (Kunshan) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on November 06, 2014. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2013.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 815570. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

SYSTEM TEST CONFIGURATION

Justification

The EUT was configured for testing according to TIA/EIA-603-D.

The final qualification test was performed with the EUT operating at normal mode.


Equipment Modifications

No modifications were made to the EUT.

Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	110605
Rohde & Schwarz	Wideband Radio Communication Tester	CMW500	1201.0002K50-116218-UY

Block Diagram of Test Setup

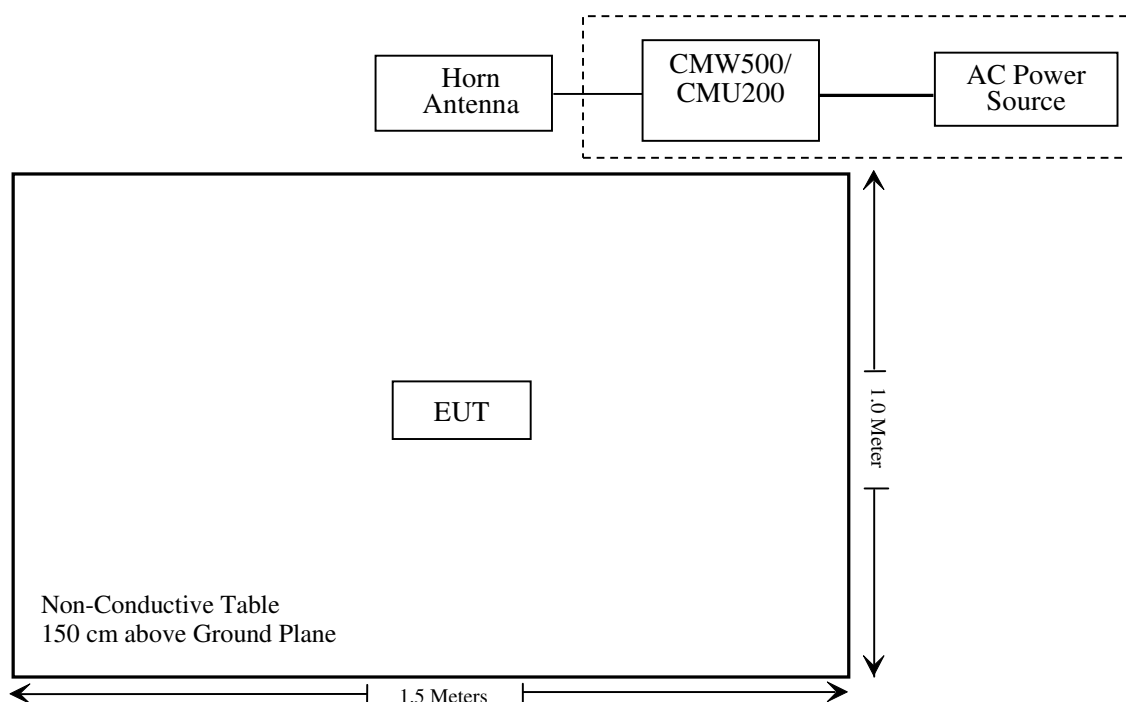

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§1.1307 (b)(1), §2.1093	RF Exposure Information	Compliance*
§2.1046; § 22.913 (a); § 24.232 (c); §27.50 (d) (h)	RF Output Power	Compliance
§ 2.1047	Modulation Characteristics	Not Applicable
§ 2.1049; § 22.905; § 22.917; § 24.238; §27.53	Occupied Bandwidth	Compliance
§ 2.1051; § 22.917 (a); § 24.238 (a); §27.53 (h)(m)	Spurious Emissions at Antenna Terminal	Compliance
§ 2.1053; § 22.917 (a); § 24.238 (a); §27.53 (h)(m)	Spurious Radiated Emissions	Compliance
§ 22.917 (a); § 24.238 (a); §27.53 (h)(m)	Band Edge	Compliance
§ 2.1055; § 22.355; § 24.235; §27.54;	Frequency stability	Compliance

Compliance*: Please refer to SAR report released by BACL, report number: RSZ161009002-20.

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiated Emission Test					
Sonoma Instrument	Amplifier	330	171377	2016-10-21	2017-10-21
Rohde & Schwarz	EMI Test Receiver	ESCI	100195	2016-11-11	2017-11-10
Sunol Sciences	Broadband Antenna	JB3	A090314-2	2016-01-09	2019-01-08
Sunol Sciences	Broadband Antenna	JB3	A090314-1	2016-01-09	2019-01-08
Narda	Pre-amplifier	AFS42-00101800	2001270	2016-09-08	2017-09-08
EMCO	Horn Antenna	3116	9510-2384	2015-11-07	2018-11-06
Rohde & Schwarz	Signal Analyzer	FSIQ26	100048	2016-11-11	2017-11-10
ETS	Horn Antenna	3115	6229	2016-01-11	2017-01-10
ETS	Horn Antenna	3115	9311-4159	2016-01-11	2017-01-10
R&S	Auto test Software	EMC32	V 09.10.0	NCR	NCR
BACL	RF cable	KS-LAB-012	KS-LAB-012	2015-12-15	2016-12-15
Ducommun technologies	RF Cable	104PEA	218124002	2016-04-22	2017-04-22
HP	Signal Generator	E4421B	US38440505	2016-11-11	2017-11-10
RF Conducted test					
BACL	TS 8997 Cable-01	T-KS-EMC086	T-KS-EMC086	2015-12-10	2016-12-09
BACL	RF cable	KS-LAB-012	KS-LAB-012	2015-12-16	2016-12-15
WEINSCHL	3dB Attenuator	5326	N/A	2016-06-18	2017-06-18
Rohde & Schwarz	OSP120 BASE UNIT	OSP120	101247	2016-07-04	2017-07-03
Rohde & Schwarz	Signal Analyzer	FSIQ26	836131	2016-09-21	2017-09-21
Rohde & Schwarz	Signal Analyzer	FSIQ26	100048	2016-11-11	2017-11-10
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	110605	2016-11-11	2017-11-10
R&S	Wideband Radio Communication tester	CMW500	1201.002K50-116218-UY	2016-10-08	2017-10-07
HONOVA	Power Splitter	ZFRSC-14-S+	019411452	2016-06-12	2017-06-12
WEINSCHL	10dB Attenuator	5328	N/A	2016-06-18	2017-06-18

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §1.1307(b) & §2.1093 - RF EXPOSURE INFORMATION

Applicable Standard

FCC§1.1307, §2.1093.

Test Result

Compliance, please refer to the SAR report: RSZ161009002-20.

FCC §2.1047 - MODULATION CHARACTERISTIC

According to FCC § 2.1047(d) , Part 22H & 24E, Part 27 there is no specific requirement for digital modulation, therefore modulation characteristic is not presented.

§2.1046; § 22.913 (a); § 24.232 (c); §27.50 (c) (d) (h) - RF OUTPUT POWER**Applicable Standards**

According to FCC §2.1046 and §22.913 (a), the ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 watts.

According to FCC §2.1046 and §24.232 (c), mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications..


According to §27.50(c), Portable stations (hand-held devices) in the 600 MHz uplink band and the 698-746 MHz band, and fixed and mobile stations in the 600 MHz uplink band are limited to 3 watts ERP.

According to §27.50(d), the maximum EIRP must not exceed 1Watts (30dBm) for 1710-1755MHz. The peak-to-average power ratio (PAPR) of the transmitter output power must not exceed 13 dB.

According to §27.50(h), the maximum EIRP must not exceed 2Watts (33dBm) for 2500-2570MHz.

Test Procedure*Conducted method:*

The RF output of the transmitter was connected to the CMW500/CMU200 through sufficient attenuation.

*Radiated method:*

TIA603-D section 2.2.17

Test Data**Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	55 %
ATM Pressure:	101.0 kPa

The testing was performed by Peter Jiang on 2016-11-15.

Conducted Power**Cellular Band (Part 22H)**

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)	Limit (dBm)
GSM	128	824.2	31.96	38.45
	190	836.6	31.86	38.45
	251	848.8	31.85	38.45

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)				Limit (dBm)
			1 slot	2 slots	3 slots	4 slots	
GPRS	128	824.2	32.03	31.26	29.35	28.23	38.45
	190	836.6	31.94	31.13	29.18	28.01	38.45
	251	848.8	31.93	31.09	29.11	27.94	38.45

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)				Limit (dBm)
			1 slot	2 slots	3 slots	4 slots	
EGPRS	128	824.2	25.12	24.05	21.84	20.78	38.45
	190	836.6	25.00	23.94	21.72	20.54	38.45
	251	848.8	24.84	23.80	21.55	20.36	38.45

Mode	Test Condition	Test Mode	3GPP Sub Test	Average Output Power (dBm)		
				Low Frequency	Middle Frequency	High Frequency
WCDMA (Band 5)	Normal	RMC		22.21	22.33	22.40
		Rel 6 HSDPA	1	21.53	21.62	21.67
			2	21.58	21.68	21.71
			3	21.54	21.69	21.73
			4	21.61	21.71	21.68
		Rel 6 HSUPA	1	21.56	21.62	21.69
			2	21.59	21.65	21.72
			3	21.51	21.62	21.73
			4	21.49	21.58	21.74
			5	21.63	21.66	21.67
		DC-HSDPA	1	21.35	21.25	21.01
			2	21.31	21.37	21.12
			3	21.26	21.21	21.15
			4	21.14	21.32	21.16
		HSPA+	1	21.22	21.30	21.31

PCS Band (Part 24E)

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)	Limit (dBm)
GSM	512	1850.2	28.20	33
	661	1880.0	28.48	33
	810	1909.8	28.69	33

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)				Limit (dBm)
			1 slot	2 slots	3 slots	4 slots	
GPRS	512	1850.2	28.14	27.36	25.37	24.29	33
	661	1880.0	28.59	27.66	25.74	24.67	33
	810	1909.8	28.72	27.97	26.13	25.08	33

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)				Limit (dBm)
			1 slot	2 slots	3 slots	4 slots	
EGPRS	512	1850.2	24.82	23.72	21.54	20.18	33
	661	1880.0	25.32	24.21	22.00	20.63	33
	810	1909.8	25.58	24.54	22.27	20.85	33

Mode	Test Condition	Test Mode	3GPP Sub Test	Average Output Power (dBm)		
				Low Frequency	Middle Frequency	High Frequency
WCDMA (Band 2)	Normal	RMC		21.50	22.03	21.87
		Rel 6 HSDPA	1	20.89	21.46	21.22
			2	20.85	21.49	21.19
			3	20.93	21.52	21.15
			4	20.89	21.47	21.22
		Rel 6 HSUPA	1	20.96	21.39	21.27
			2	20.89	21.52	21.21
			3	20.85	21.48	21.09
			4	20.87	21.61	21.13
			5	20.96	21.57	21.29
		DC-HSDPA	1	20.91	20.83	20.75
			2	20.72	20.79	20.82
			3	20.86	20.88	20.79
			4	20.89	20.85	20.81
		HSPA+	1	20.79	20.83	20.77

Peak-to-average ratio (PAR)**Cellular Band**

Mode	Channel	PAR (dB)	Limit (dB)
GSM (GMSK)	Low	0.16	13
	Middle	0.22	13
	High	0.38	13

Mode	Channel	PAR (dB)	Limit (dBm)
EGPRS (8PSK)	Low	0.16	13
	Middle	0.29	13
	High	0.37	13

Mode	Channel	PAR (dB)	Limit (dB)
RMC (BPSK)	Low	2.01	13
	Middle	2.21	13
	High	2.78	13
HSDPA (16QAM)	Low	1.96	13
	Middle	2.13	13
	High	2.36	13
HSUPA (BPSK)	Low	1.97	13
	Middle	2.18	13
	High	2.49	13

PCS Band

Mode	Channel	PAR (dB)	Limit (dB)
GSM (GMSK)	Low	0.12	13
	Middle	0.29	13
	High	0.41	13

Mode	Channel	PAR (dB)	Limit (dBm)
EGPRS (8PSK)	Low	0.22	13
	Middle	0.31	13
	High	0.41	13

Mode	Channel	PAR (dB)	Limit (dB)
RMC (BPSK)	Low	2.12	13
	Middle	2.37	13
	High	2.68	13
HSDPA (16QAM)	Low	2.32	13
	Middle	2.69	13
	High	3.01	13
HSUPA (BPSK)	Low	2.41	13
	Middle	2.76	13
	High	3.12	13

Radiated Power**GSM Mode:**

Frequency (MHz)	Receiver Reading (dBμV)	Turntable Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Height (m)	Polar (H/V)	S.G. Level (dBm)	Cable loss (dB)	Antenna Gain (dB)			
ERP, Cellular Band (Part 22H), Middle Channel										
836.6	96.46	235	1.1	H	25.5	0.46	4.75	29.79	38.45	8.66
836.6	89.63	336	1.0	V	18.6	0.46	4.75	22.89	38.45	15.56
EIRP, PCS Band (Part 24E), Middle Channel										
1880.00	78.04	124	2.3	H	17.2	0.31	10.4	27.29	33	5.71
1880.00	75.67	171	1.6	V	11.4	0.31	10.4	21.49	33	11.51

EGRPS Mode:

Frequency (MHz)	Receiver Reading (dBμV)	Turntable Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Height (m)	Polar (H/V)	S.G. Level (dBm)	Cable loss (dB)	Antenna Gain (dB)			
ERP, Cellular Band (Part 22H), Middle Channel										
836.6	90.51	123	1.3	H	19.5	0.46	4.75	23.79	38.45	14.66
836.6	84.81	273	1.6	V	13.8	0.46	4.75	18.09	38.45	20.36
EIRP, PCS Band (Part 24E), Middle Channel										
1880.00	73.64	120	2.3	H	12.8	0.31	10.4	22.89	33	10.11
1880.00	74.67	203	1.2	V	10.4	0.31	10.4	20.49	33	12.51

WCDMA Mode:

Frequency (MHz)	Receiver Reading (dBμV)	Turntable Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Height (m)	Polar (H/V)	S.G. Level (dBm)	Cable loss (dB)	Antenna Gain (dB)			
ERP, WCDMA Band V (Part 22H), Middle Channel										
836.6	86.78	313	1.5	H	15.8	0.46	4.75	20.09	38.45	18.36
836.6	79.89	238	1.1	V	8.9	0.46	4.75	13.19	38.45	25.26
EIRP, WCDMA Band II (Part 24E), Middle Channel										
1880.00	70.64	261	2.5	H	9.8	0.31	10.4	19.89	33	13.11
1880.00	72.97	103	1.2	V	8.7	0.31	10.4	18.79	33	14.21

Note:

All above data were tested with no amplifier.

Absolute Level = SG Level - Cable loss + Antenna Gain

Margin = Limit- Absolute Level

LTE Band 4:**Maximum Output Power**

Bandwidth (MHz)	Modulation	RB size/RB Offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
1.4	QPSK	RB Size=1, RB Offset=0	22.08	22.06	22.00
		RB Size=1, RB Offset=2	22.15	22.14	22.01
		RB Size=1, RB Offset=5	22.24	22.20	22.10
		RB Size=3, RB Offset=0	22.11	22.14	22.22
		RB Size=3, RB Offset=1	22.16	22.28	22.35
		RB Size=3, RB Offset=2	22.25	22.33	22.46
		RB Size=6, RB Offset=0	21.00	21.06	20.93
	16QAM	RB Size=1, RB Offset=0	20.99	21.05	21.04
		RB Size=1, RB Offset=2	21.10	21.05	21.04
		RB Size=1, RB Offset=5	21.10	21.13	21.09
		RB Size=3, RB Offset=0	21.11	21.12	21.22
		RB Size=3, RB Offset=1	21.14	21.25	21.24
		RB Size=3, RB Offset=2	21.27	21.38	21.38
		RB Size=6, RB Offset=0	20.14	20.05	20.14
3.0	QPSK	RB Size=1, RB Offset=0	22.05	22.07	21.99
		RB Size=1, RB Offset=7	22.22	22.24	22.19
		RB Size=1, RB Offset=14	22.28	22.41	22.21
		RB Size=8, RB Offset=0	21.32	21.13	21.10
		RB Size=8, RB Offset=4	21.36	21.16	21.15
		RB Size=8, RB Offset=7	21.55	21.22	21.34
		RB Size=15, RB Offset=0	21.06	21.06	20.91
	16QAM	RB Size=1, RB Offset=0	21.02	21.07	21.09
		RB Size=1, RB Offset=7	21.08	21.15	21.19
		RB Size=1, RB Offset=14	21.15	21.19	21.35
		RB Size=8, RB Offset=0	20.14	20.22	20.27
		RB Size=8, RB Offset=4	20.18	20.22	20.30
		RB Size=8, RB Offset=7	20.19	20.26	20.34
		RB Size=15, RB Offset=0	20.02	20.07	20.12

Bandwidth (MHz)	Modulation	RB size/RB Offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5.0	QPSK	RB Size=1, RB Offset=0	22.05	22.12	22.08
		RB Size=1, RB Offset=12	22.22	22.13	22.19
		RB Size=1, RB Offset=24	22.29	22.24	22.34
		RB Size=12, RB Offset=0	21.13	21.09	20.97
		RB Size=12, RB Offset=6	21.31	21.23	21.11
		RB Size=12, RB Offset=11	21.34	21.24	21.12
		RB Size=25, RB Offset=0	21.17	21.05	21.06
	16QAM	RB Size=1, RB Offset=0	20.98	20.99	21.04
		RB Size=1, RB Offset=12	21.06	21.10	21.14
		RB Size=1, RB Offset=24	21.08	21.21	21.20
		RB Size=12, RB Offset=0	20.15	20.20	20.31
		RB Size=12, RB Offset=6	20.17	20.22	20.37
		RB Size=12, RB Offset=11	20.31	20.37	20.48
		RB Size=25, RB Offset=0	20.17	20.13	20.06
10.0	QPSK	RB Size=1, RB Offset=0	22.02	22.11	22.26
		RB Size=1, RB Offset=24	22.08	22.20	22.37
		RB Size=1, RB Offset=49	22.17	22.30	22.44
		RB Size=25, RB Offset=0	21.14	21.13	21.14
		RB Size=25, RB Offset=12	21.17	21.15	21.20
		RB Size=25, RB Offset=24	21.30	21.22	21.21
		RB Size=50, RB Offset=0	21.01	21.11	21.12
	16QAM	RB Size=1, RB Offset=0	21.67	21.66	21.63
		RB Size=1, RB Offset=24	21.84	21.61	21.77
		RB Size=1, RB Offset=49	21.85	21.70	21.90
		RB Size=25, RB Offset=0	20.60	20.70	20.75
		RB Size=25, RB Offset=12	20.63	20.83	20.89
		RB Size=25, RB Offset=24	20.70	20.87	20.95
		RB Size=50, RB Offset=0	20.18	20.12	20.17

Bandwidth (MHz)	Modulation	RB size/RB Offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
15.0	QPSK	RB Size=1, RB Offset=0	22.08	22.23	22.35
		RB Size=1, RB Offset=37	22.14	22.34	22.52
		RB Size=1, RB Offset=74	22.24	22.53	22.64
		RB Size=36, RB Offset=0	21.28	21.20	21.14
		RB Size=36, RB Offset=18	21.39	21.26	21.21
		RB Size=36, RB Offset=37	21.54	21.39	21.34
		RB Size=75, RB Offset=0	21.08	21.22	21.33
	16QAM	RB Size=1, RB Offset=0	21.66	21.75	21.83
		RB Size=1, RB Offset=37	21.86	21.62	21.94
		RB Size=1, RB Offset=74	22.05	21.66	22.14
		RB Size=36, RB Offset=0	20.78	20.83	20.84
		RB Size=36, RB Offset=18	20.90	20.98	20.87
		RB Size=36, RB Offset=37	21.02	21.02	21.05
		RB Size=75, RB Offset=0	20.21	20.23	20.14
20.0	QPSK	RB Size=1, RB Offset=0	22.12	22.16	22.11
		RB Size=1, RB Offset=49	22.16	22.34	22.14
		RB Size=1, RB Offset=99	22.30	22.53	22.21
		RB Size=50, RB Offset=0	21.31	21.14	21.12
		RB Size=50, RB Offset=24	21.41	21.19	21.19
		RB Size=50, RB Offset=49	21.46	21.32	21.29
		RB Size=100, RB Offset=0	21.16	21.10	21.14
	16QAM	RB Size=1, RB Offset=0	21.80	21.79	21.64
		RB Size=1, RB Offset=49	21.96	21.76	21.81
		RB Size=1, RB Offset=99	22.02	21.79	21.89
		RB Size=50, RB Offset=0	20.95	20.87	20.87
		RB Size=50, RB Offset=24	21.04	20.94	20.93
		RB Size=50, RB Offset=49	21.05	21.10	20.95
		RB Size=100, RB Offset=0	20.22	20.23	20.24

Peak-to-average ratio (PAR)

Modulation	Middle Channel (dB)	PAR Limit (dB)	Result
QPSK (1RB Size)	4.66	13	Pass
QPSK (100%RB Size)	5.31	13	Pass
16QAM (1RB Size)	4.78	13	Pass
16QAM (100%RB Size)	5.85	13	Pass

QPSK:

Frequency (MHz)	Receiver Reading (dBμV)	Turn table Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)
			Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)		
Middle Channel									
1.4 MHz Bandwidth									
1732.50	73.88	236	1.9	H	11.5	0.30	9.90	21.10	30
1732.50	74.24	118	1.9	V	9.4	0.30	9.90	19.00	30
3 MHz Bandwidth									
1732.50	73.45	25	1.5	H	11.1	0.30	9.90	20.70	30
1732.50	74.31	308	2.3	V	9.5	0.30	9.90	19.10	30
5 MHz Bandwidth									
1732.50	73.28	34	1.7	H	10.9	0.30	9.90	20.50	30
1732.50	74.02	178	2.3	V	9.2	0.30	9.90	18.80	30
10MHz Bandwidth									
1732.50	73.07	359	1.2	H	10.7	0.30	9.90	20.30	30
1732.50	73.81	192	1.6	V	9.0	0.30	9.90	18.60	30
15 MHz Bandwidth									
1732.50	72.86	283	1.4	H	10.5	0.30	9.90	20.10	30
1732.50	73.71	323	1.1	V	8.9	0.30	9.90	18.50	30
20 MHz Bandwidth									
1732.50	72.46	142	2.5	H	10.1	0.30	9.90	19.70	30
1732.50	73.63	300	1.0	V	8.8	0.30	9.90	18.40	30

16QAM:

Frequency (MHz)	Receiver Reading (dBμV)	Turn table Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)
			Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)		
Middle Channel									
1.4 MHz Bandwidth									
1732.50	73.18	342	1.6	H	10.8	0.30	9.90	20.40	30
1732.50	73.34	199	1.5	V	8.5	0.30	9.90	18.10	30
3 MHz Bandwidth									
1732.50	72.97	244	1.3	H	10.6	0.30	9.90	20.20	30
1732.50	73.12	295	1.8	V	8.3	0.30	9.90	17.90	30
5 MHz Bandwidth									
1732.50	72.61	359	2.0	H	10.3	0.30	9.90	19.90	30
1732.50	72.85	316	2.5	V	8.0	0.30	9.90	17.60	30
10 MHz Bandwidth									
1732.50	72.42	291	1.3	H	10.1	0.30	9.90	19.70	30
1732.50	72.97	111	1.9	V	8.1	0.30	9.90	17.70	30
15 MHz Bandwidth									
1732.50	72.28	84	1.0	H	9.9	0.30	9.90	19.50	30
1732.50	72.63	236	2.3	V	7.8	0.30	9.90	17.40	30
20 MHz Bandwidth									
1732.50	71.93	125	1.4	H	9.6	0.30	9.90	19.20	30
1732.50	72.49	249	1.4	V	7.6	0.30	9.90	17.20	30

LTE Band 7:**Maximum Output Power**

Bandwidth (MHz)	Modulation	RB size/RB Offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5.0	QPSK	RB Size=1, RB Offset=0	22.75	22.78	22.95
		RB Size=1, RB Offset=12	22.63	22.81	22.72
		RB Size=1, RB Offset=24	22.92	22.86	22.87
		RB Size=12, RB Offset=0	21.59	21.61	21.56
		RB Size=12, RB Offset=6	21.64	21.63	21.60
		RB Size=12, RB Offset=11	21.65	21.62	21.73
		RB Size=25, RB Offset=0	21.60	21.55	21.49
	16QAM	RB Size=1, RB Offset=0	21.35	21.42	21.48
		RB Size=1, RB Offset=12	21.36	21.44	21.50
		RB Size=1, RB Offset=24	21.36	21.42	21.41
		RB Size=12, RB Offset=0	20.76	20.68	20.70
		RB Size=12, RB Offset=6	20.72	20.69	20.73
		RB Size=12, RB Offset=11	20.75	20.73	20.78
		RB Size=25, RB Offset=0	20.60	20.56	20.56
10.0	QPSK	RB Size=1, RB Offset=0	22.92	22.84	22.99
		RB Size=1, RB Offset=24	22.95	22.87	22.89
		RB Size=1, RB Offset=49	22.95	22.91	23.00
		RB Size=25, RB Offset=0	21.64	21.59	21.46
		RB Size=25, RB Offset=12	21.73	21.63	21.75
		RB Size=25, RB Offset=24	21.55	21.65	21.66
		RB Size=50, RB Offset=0	21.62	21.56	21.55
	16QAM	RB Size=1, RB Offset=0	21.93	21.95	22.13
		RB Size=1, RB Offset=24	21.88	21.98	22.09
		RB Size=1, RB Offset=49	21.93	21.96	21.79
		RB Size=25, RB Offset=0	20.81	20.68	20.58
		RB Size=25, RB Offset=12	20.74	20.71	20.59
		RB Size=25, RB Offset=24	20.77	20.73	20.76
		RB Size=50, RB Offset=0	20.35	20.54	20.40

Bandwidth (MHz)	Modulation	RB size/RB Offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
15.0	QPSK	RB Size=1, RB Offset=0	22.90	22.93	22.96
		RB Size=1, RB Offset=37	23.07	22.96	22.77
		RB Size=1, RB Offset=74	22.81	22.95	23.04
		RB Size=36, RB Offset=0	21.78	21.81	21.67
		RB Size=36, RB Offset=18	21.68	21.86	22.01
		RB Size=36, RB Offset=37	21.92	21.84	21.79
		RB Size=75, RB Offset=0	21.63	21.81	21.76
	16QAM	RB Size=1, RB Offset=0	22.07	21.97	22.11
		RB Size=1, RB Offset=37	22.07	21.95	21.88
		RB Size=1, RB Offset=74	22.01	21.98	22.17
		RB Size=36, RB Offset=0	20.84	20.84	20.90
		RB Size=36, RB Offset=18	20.98	20.87	20.92
		RB Size=36, RB Offset=37	20.92	20.86	20.84
		RB Size=75, RB Offset=0	20.61	20.69	20.67
20.0	QPSK	RB Size=1, RB Offset=0	22.93	22.96	22.98
		RB Size=1, RB Offset=49	22.95	22.93	22.80
		RB Size=1, RB Offset=99	23.06	22.95	22.88
		RB Size=50, RB Offset=0	21.46	21.61	21.52
		RB Size=50, RB Offset=24	21.68	21.64	21.55
		RB Size=50, RB Offset=49	21.64	21.68	21.68
		RB Size=100, RB Offset=0	21.41	21.57	21.56
	16QAM	RB Size=1, RB Offset=0	21.74	21.85	21.92
		RB Size=1, RB Offset=49	22.01	21.88	21.84
		RB Size=1, RB Offset=99	21.75	21.86	21.94
		RB Size=50, RB Offset=0	20.72	20.79	20.76
		RB Size=50, RB Offset=24	20.81	20.77	20.76
		RB Size=50, RB Offset=49	20.78	20.78	20.71
		RB Size=100, RB Offset=0	20.60	20.58	20.49

Peak-to-average ratio (PAR)

Modulation	Middle Channel (dB)	PAR Limit (dB)	Result
QPSK (1RB Size)	3.79	13	Pass
QPSK (100%RB Size)	4.61	13	Pass
16QAM (1RB Size)	3.95	13	Pass
16QAM (100%RB Size)	4.82	13	Pass

EIRP:**QPSK:**

Frequency (MHz)	Receiver Reading (dBμV)	Turn table Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)
			Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)		
Middle Channel									
5 MHz Bandwidth									
2535.00	67.82	273	2.0	H	10.4	0.43	10.60	20.57	33
2535.00	65.12	319	2.0	V	6.0	0.43	10.60	16.17	33
10 MHz Bandwidth									
2535.00	66.72	84	1.3	H	9.3	0.43	10.60	19.47	33
2535.00	65.02	215	1.9	V	5.9	0.43	10.60	16.07	33
15 MHz Bandwidth									
2535.00	66.22	152	2.2	H	8.8	0.43	10.60	18.97	33
2535.00	64.62	221	2.3	V	5.5	0.43	10.60	15.67	33
20 MHz Bandwidth									
2535.00	66.02	225	1.8	H	8.6	0.43	10.60	18.77	33
2535.00	64.32	280	1.4	V	5.2	0.43	10.60	15.37	33

16QAM:

Frequency (MHz)	Receiver Reading (dBμV)	Turn table Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)
			Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)		
Middle Channel									
5 MHz Bandwidth									
2535.00	67.31	298	2.2	H	9.9	0.43	10.60	20.07	33
2535.00	64.39	122	2.0	V	5.2	0.43	10.60	15.37	33
10 MHz Bandwidth									
2535.00	66.01	28	1.3	H	8.6	0.43	10.60	18.77	33
2535.00	64.03	270	2.3	V	4.9	0.43	10.60	15.07	33
15 MHz Bandwidth									
2535.00	65.62	20	1.7	H	8.2	0.43	10.60	18.37	33
2535.00	63.61	120	1.9	V	4.5	0.43	10.60	14.67	33
20 MHz Bandwidth									
2535.00	65.41	34	2.1	H	8.0	0.43	10.60	18.17	33
2535.00	63.36	334	1.1	V	4.2	0.43	10.60	14.37	33

LTE Band 17:**Maximum Output Power**

Bandwidth (MHz)	Modulation	RB size/RB Offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5.0	QPSK	RB Size=1, RB Offset=0	22.18	22.13	22.41
		RB Size=1, RB Offset=12	22.36	22.21	22.58
		RB Size=1, RB Offset=24	22.46	22.61	22.70
		RB Size=12, RB Offset=0	21.21	21.18	21.33
		RB Size=12, RB Offset=6	21.31	21.29	21.48
		RB Size=12, RB Offset=11	21.48	21.64	21.59
		RB Size=25, RB Offset=0	21.35	21.49	21.44
	16QAM	RB Size=1, RB Offset=0	21.42	21.78	21.30
		RB Size=1, RB Offset=12	21.57	21.73	21.32
		RB Size=1, RB Offset=24	21.59	21.76	21.36
		RB Size=12, RB Offset=0	20.68	20.71	20.68
		RB Size=12, RB Offset=6	20.77	20.74	20.73
		RB Size=12, RB Offset=11	20.80	20.86	20.85
		RB Size=25, RB Offset=0	20.28	20.48	20.41
10.0	QPSK	RB Size=1, RB Offset=0	22.35	22.38	22.41
		RB Size=1, RB Offset=24	22.28	22.43	22.46
		RB Size=1, RB Offset=49	22.43	22.51	22.42
		RB Size=25, RB Offset=0	21.54	21.67	21.63
		RB Size=25, RB Offset=12	21.79	21.79	21.88
		RB Size=25, RB Offset=24	21.83	21.86	21.74
		RB Size=50, RB Offset=0	21.75	21.81	21.69
	16QAM	RB Size=1, RB Offset=0	21.80	21.64	21.76
		RB Size=1, RB Offset=24	21.65	21.68	21.69
		RB Size=1, RB Offset=49	21.72	21.72	21.85
		RB Size=25, RB Offset=0	20.74	20.59	20.60
		RB Size=25, RB Offset=12	20.61	20.66	20.72
		RB Size=25, RB Offset=24	20.69	20.71	20.77
		RB Size=50, RB Offset=0	20.80	20.74	20.82

Peak-to-average ratio (PAR)

Modulation	Middle Channel (dB)	PAR Limit (dB)	Result
QPSK (1RB Size)	3.48	13	Pass
QPSK (100%RB Size)	4.23	13	Pass
16QAM (1RB Size)	4.12	13	Pass
16QAM (100%RB Size)	4.96	13	Pass

QPSK:

Frequency (MHz)	Receiver Reading (dBμV)	Turn table Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)
			Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)		
Middle Channel									
5 MHz Bandwidth									
710	88.38	73	2.0	H	17.4	0.46	4.75	21.69	34.77
710	84.76	266	2.4	V	13.8	0.46	4.75	18.09	34.77
10 MHz Bandwidth									
710	87.51	61	1.0	H	16.5	0.46	4.75	20.79	34.77
710	84.29	260	1.9	V	13.3	0.46	4.75	17.59	34.77

16QAM:

Frequency (MHz)	Receiver Reading (dBμV)	Turn table Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)
			Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)		
Middle Channel									
5 MHz Bandwidth									
710	87.56	83	2.1	H	16.6	0.46	4.75	20.89	34.77
710	85.21	30	2.2	V	14.2	0.46	4.75	18.49	34.77
10 MHz Bandwidth									
710	86.34	212	1.5	H	15.3	0.46	4.75	19.59	34.77
710	84.01	194	1.0	V	13.0	0.46	4.75	17.29	34.77

Note:

All above data were tested with no amplifier

Absolute Level = SG Level - Cable loss + Antenna Gain

Margin = Limit- Absolute Level

FCC §2.1049, §22.917, §22.905 & §24.238 & §27.53 - OCCUPIED BANDWIDTH


Applicable Standards

FCC 47 §2.1049, §22.917, §22.905, §24.238 and §27.53.

Test Procedure

The RF output of the transmitter was connected to the simulator and the spectrum analyzer through sufficient attenuation.

The resolution bandwidth of the spectrum analyzer was set at 1% to 5% of the anticipated emission bandwidth and the 26 dB & 99% bandwidth was recorded.

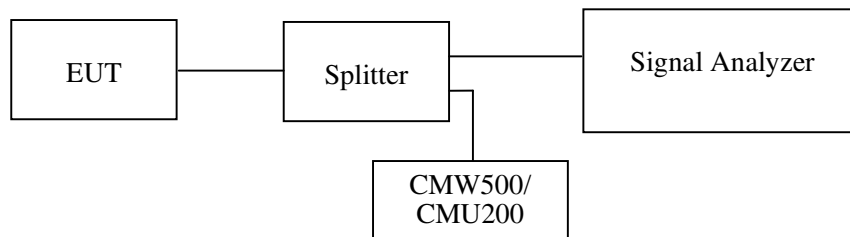

Test Data

Environmental Conditions

Temperature:	20~25℃
Relative Humidity:	50~55%
ATM Pressure:	100.0~101.0 kPa

The testing was performed by Peter Jiang from 2016-11-14 to 2016-11-29.

EUT operation mode: Transmitting

Test Result: Compliance. Please refer to the following tables and plots.

Cellular Band (Part 22H)

Mode	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Emission Bandwidth (kHz)
GSM(GMSK)	836.6	244.5	320.6
EGPRS(8PSK)	836.6	244.5	318.6

Mode	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
RMC (BPSK)	836.6	4.208	4.890
HSUPA (BPSK)	836.6	4.208	4.830
HSDPA (16QAM)	836.6	4.208	4.950


PCS Band (Part 24E)

Mode	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Emission Bandwidth (kHz)
GSM(GMSK)	1880.0	244.5	322.6
EGPRS(8PSK)	1880.0	252.5	320.6


Mode	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
RMC (BPSK)	1880.0	4.228	4.950
HSUPA (BPSK)	1880.0	4.208	4.890
HSDPA (16QAM)	1880.0	4.208	4.890



Cellular Band (Part 22H)



26 dB Emissions Bandwidth & 99% Occupied Bandwidth for GSM (GMSK) Mode


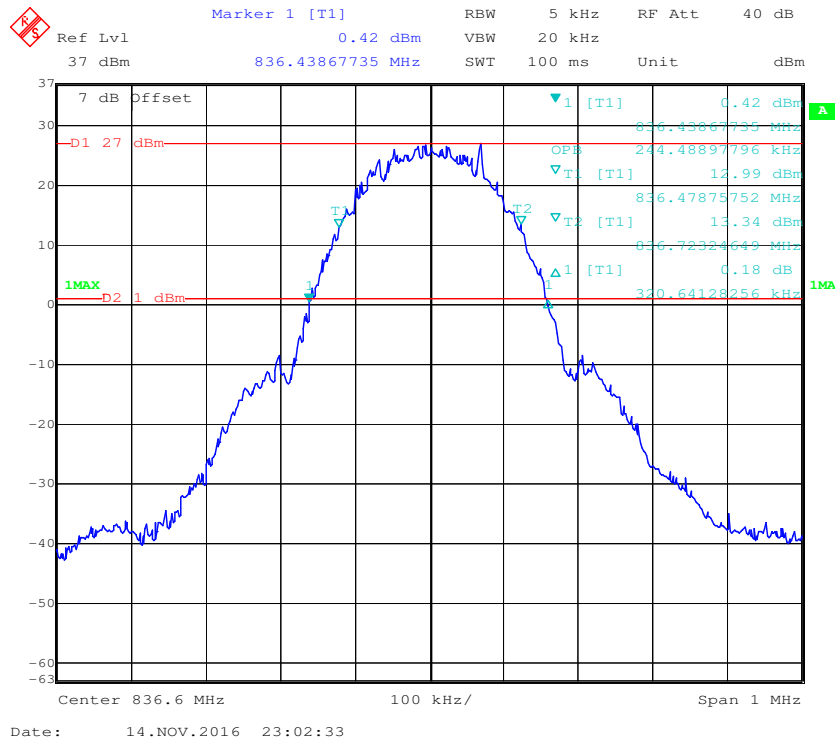




26 dB Emissions Bandwidth & 99% Occupied Bandwidth for EGPRS (8PSK) Mode

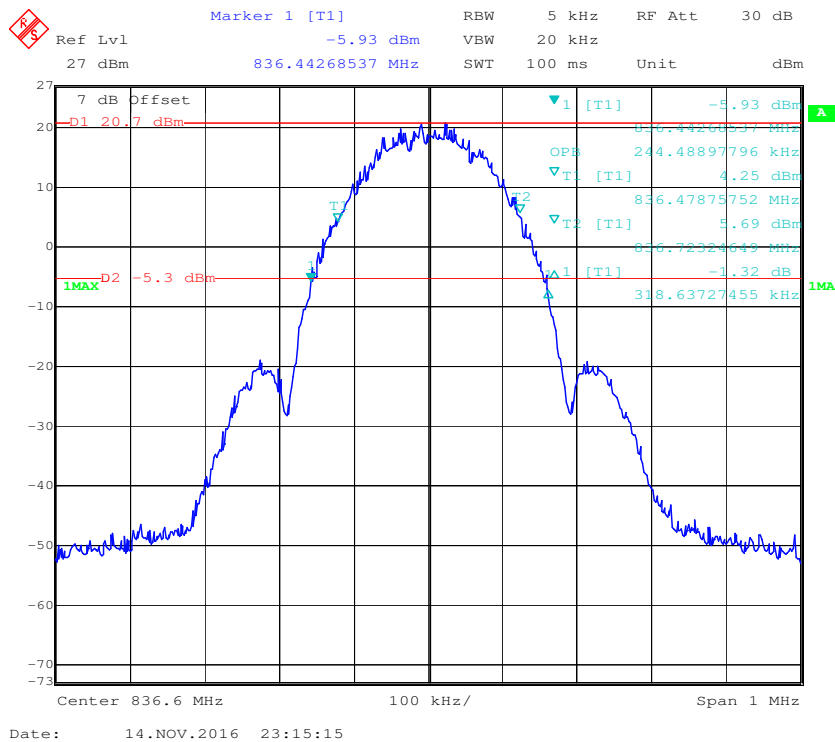

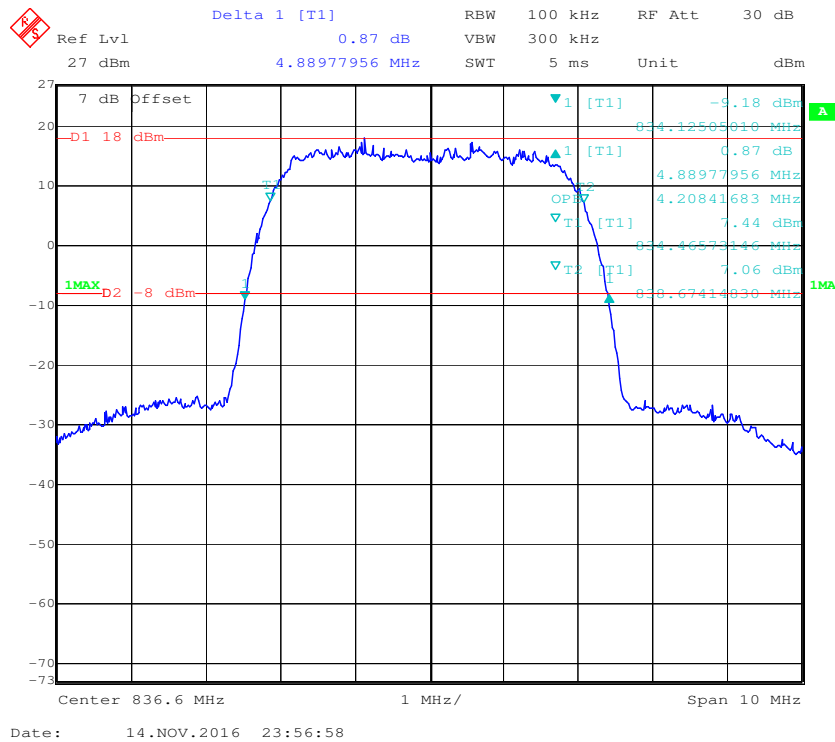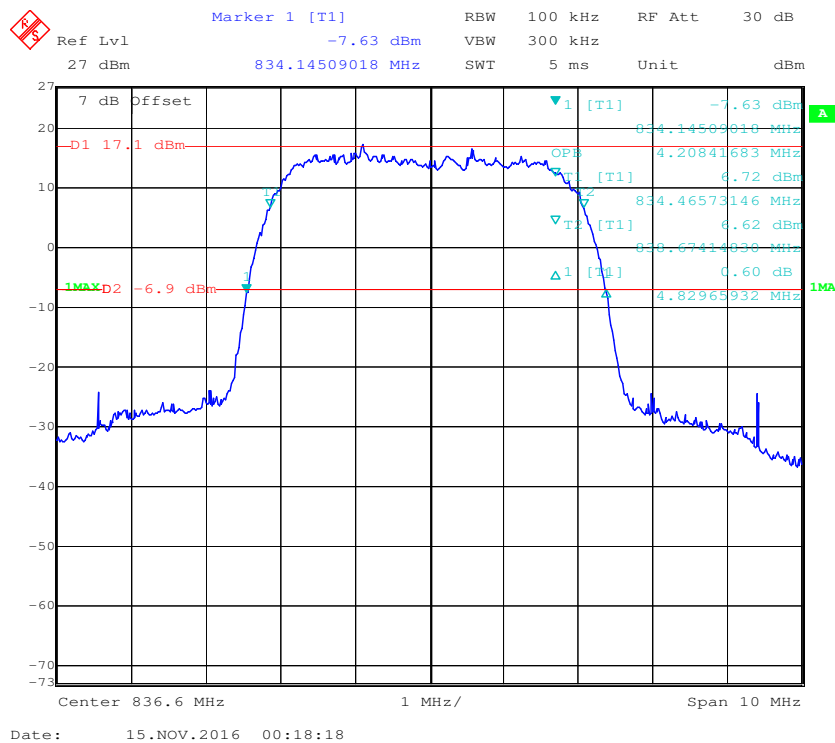26 dB Emissions Bandwidth & 99% Occupied Bandwidth for RMC (BPSK) Mode**26 dB Emissions Bandwidth & 99% Occupied Bandwidth for HSUPA (BPSK) Mode**

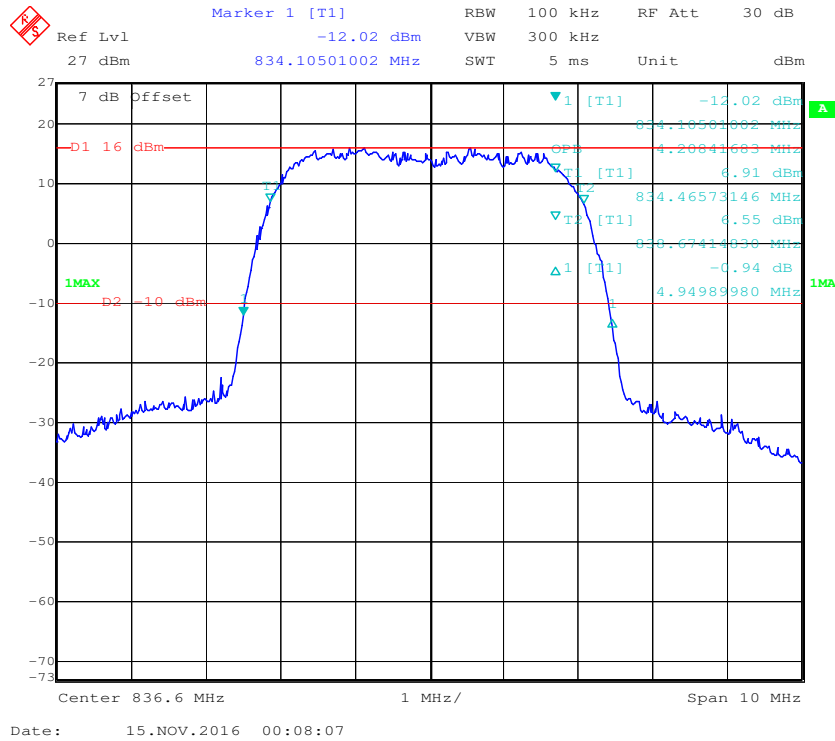
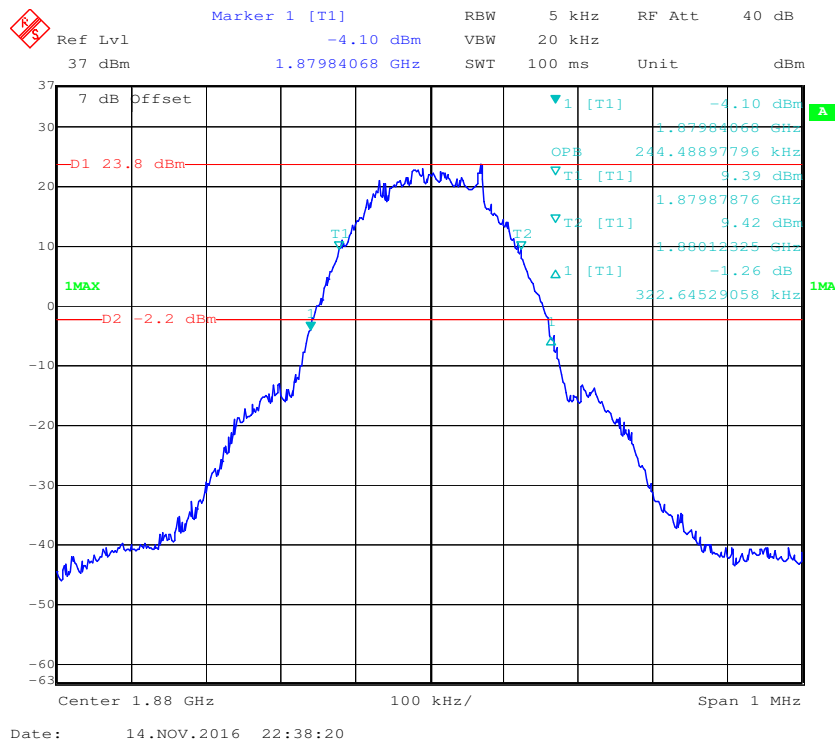
26 dB Emissions Bandwidth & 99% Occupied Bandwidth for HSDPA (16QAM) Mode**PCS Band (Part 24E)****26 dB Emissions Bandwidth & 99% Occupied Bandwidth for GSM (GMSK) Mode**

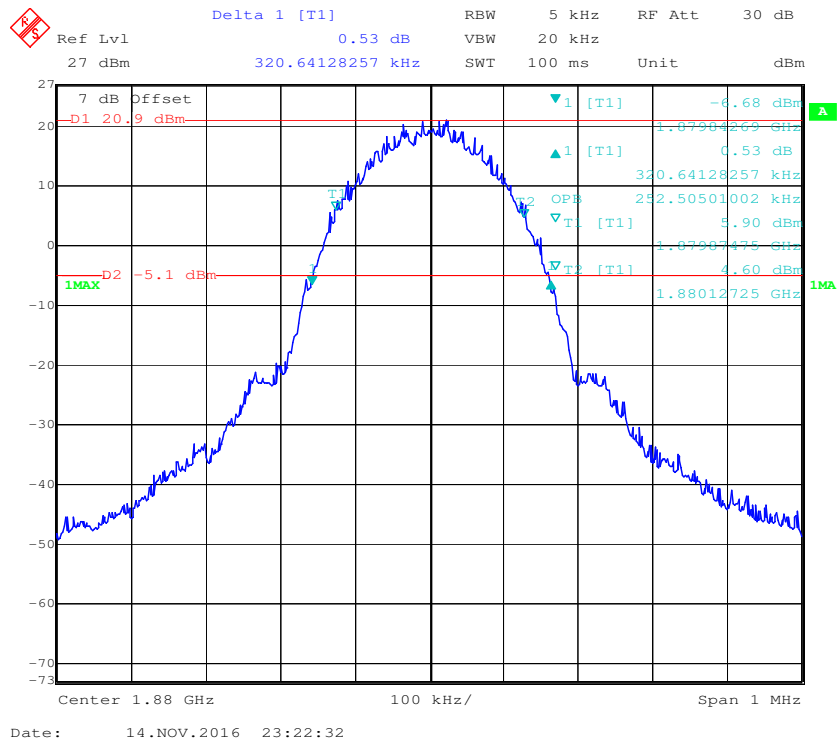
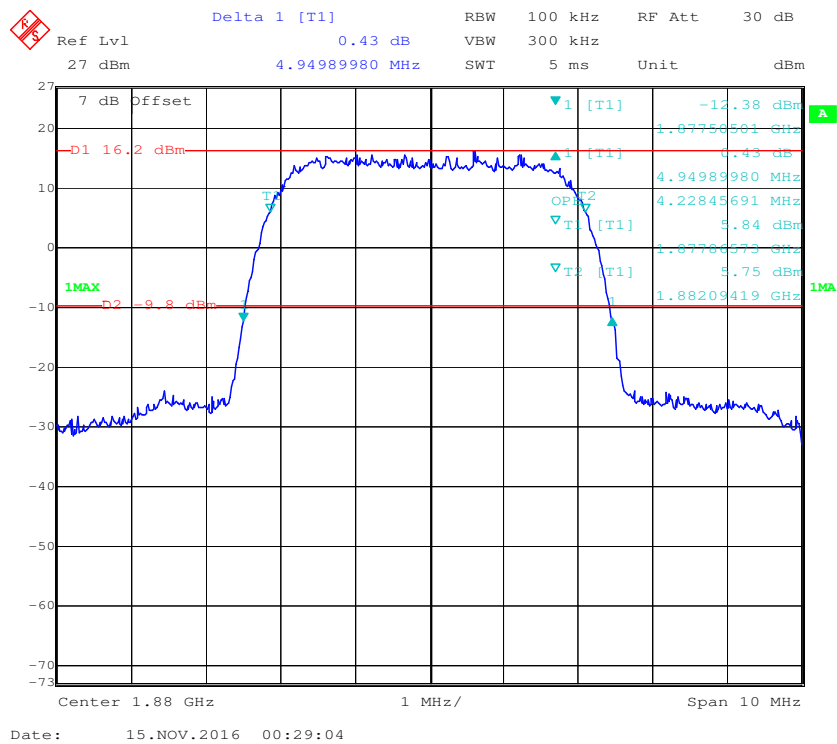
26 dB Emissions Bandwidth & 99% Occupied Bandwidth for EGPRS (8PSK) Mode**26 dB Emissions Bandwidth & 99% Occupied Bandwidth for RMC (BPSK) Mode**

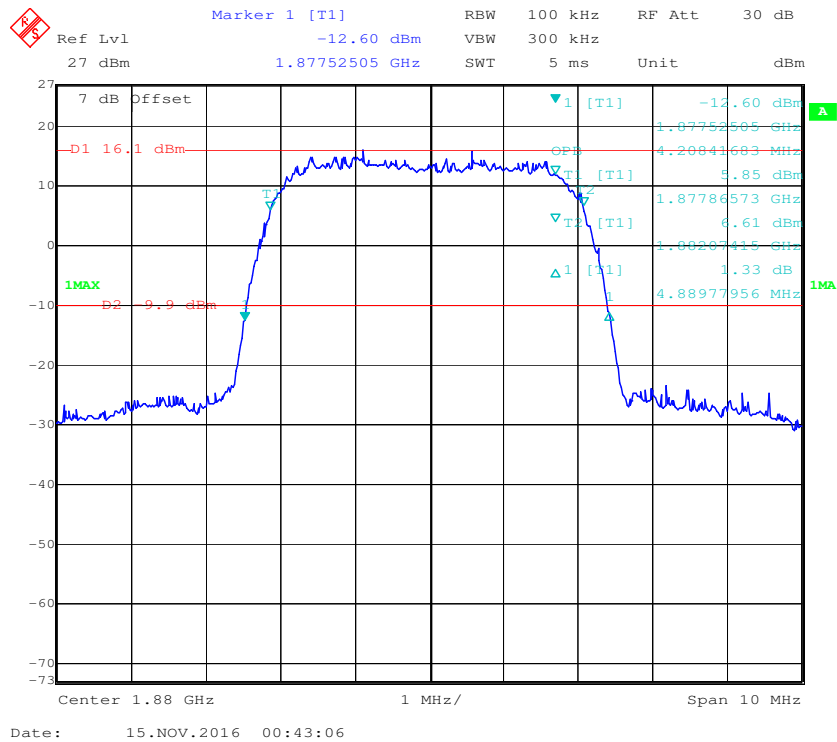
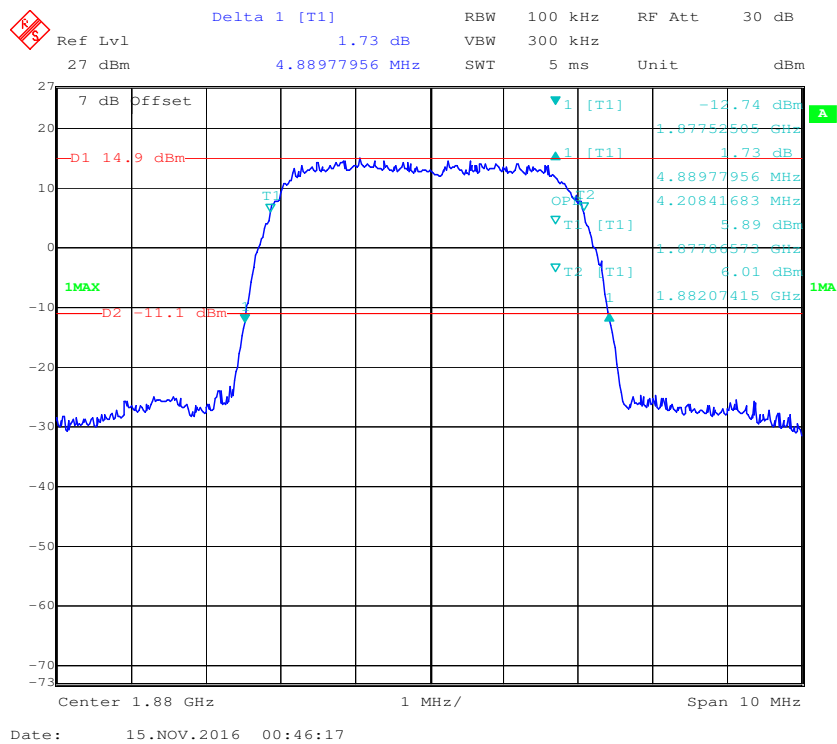
26 dB Emissions Bandwidth & 99% Occupied Bandwidth for HSUPA (BPSK) Mode**26 dB Emissions Bandwidth & 99% Occupied Bandwidth for HSDPA (16QAM) Mode**



LTE Band 4: (Middle Channel)



Bandwidth (MHz)	Modulation	99% Occupied Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
1.4	QPSK	1.112	1.281
	16QAM	1.106	1.281
3.0	QPSK	2.693	2.922
	16QAM	2.693	2.898
5.0	QPSK	4.509	4.970
	16QAM	4.489	4.950
10.0	QPSK	8.938	9.780
	16QAM	8.938	9.659
15.0	QPSK	13.467	14.790
	16QAM	13.467	14.729
20.0	QPSK	17.876	19.158
	16QAM	17.876	19.158

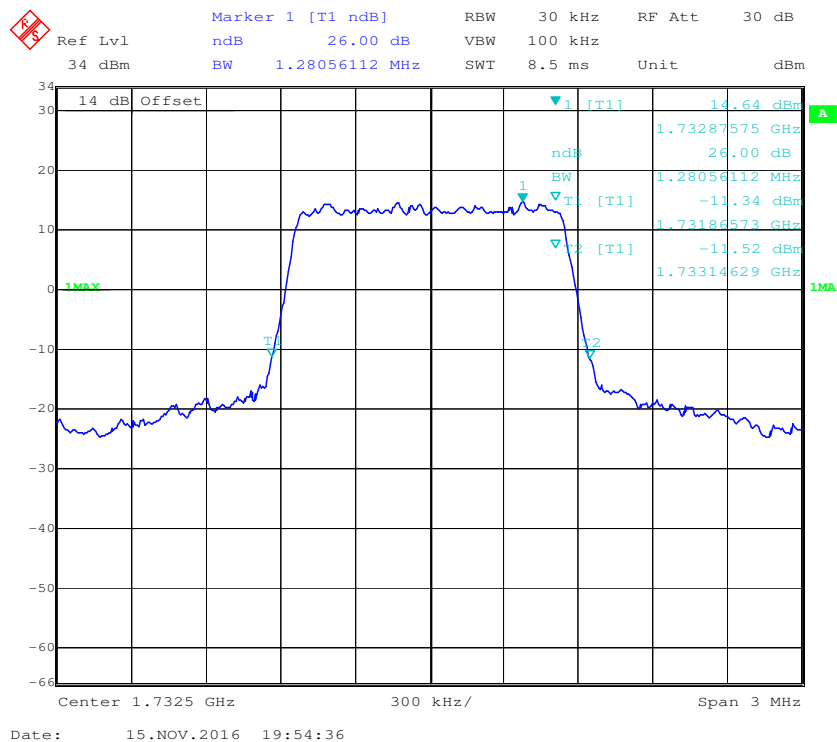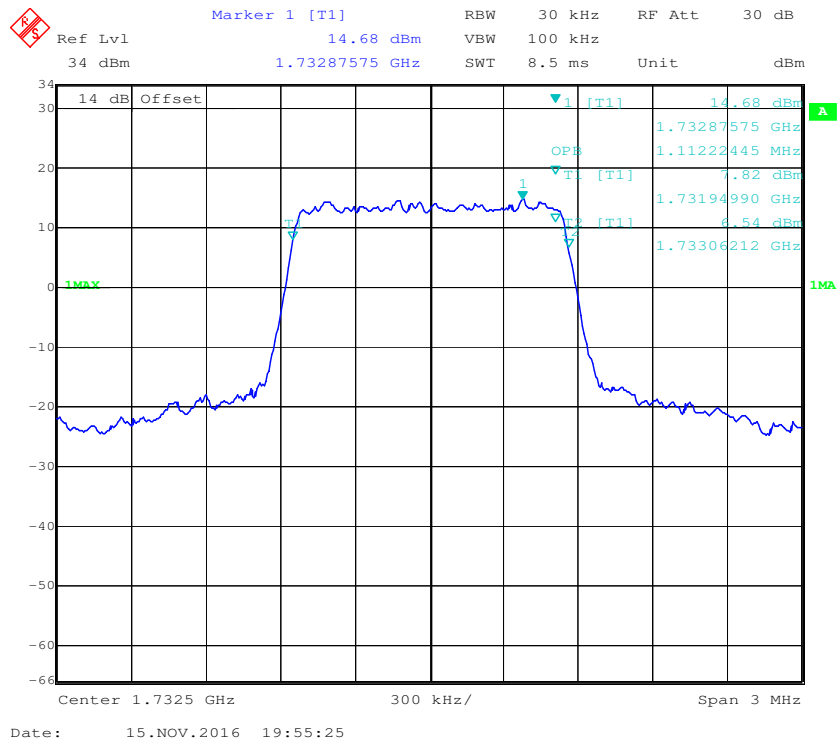

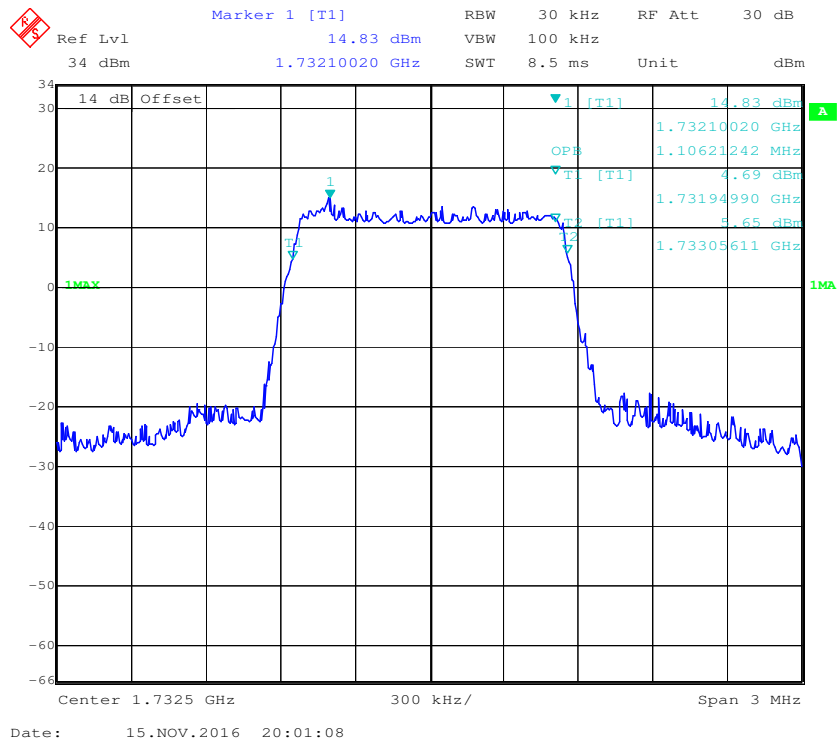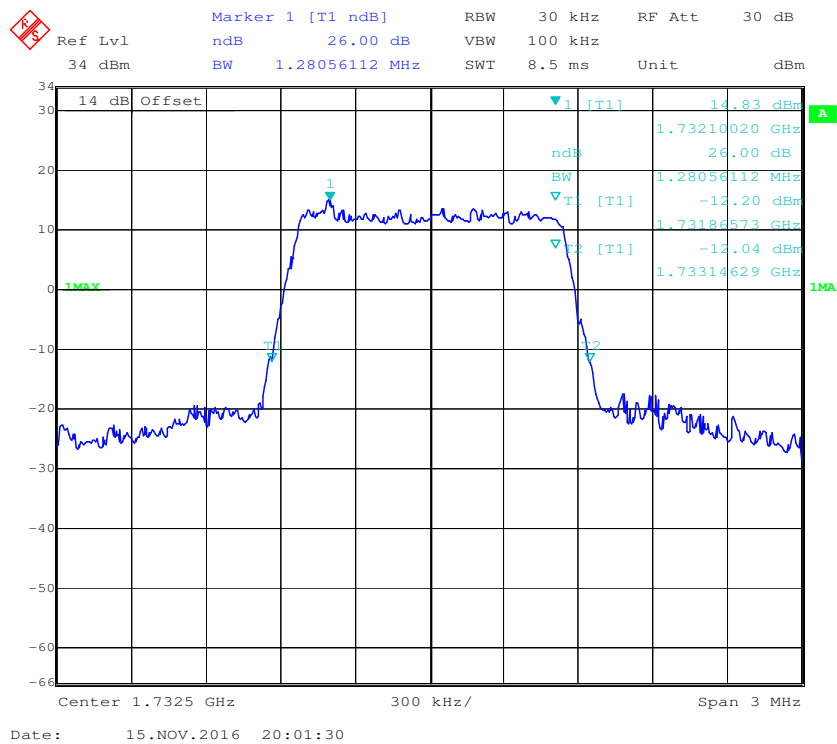
16-QAM (1.4 MHz) - 99% Occupied Bandwidth, Middle channel**16-QAM (1.4 MHz) - 26 dB Emissions Bandwidth, Middle channel**

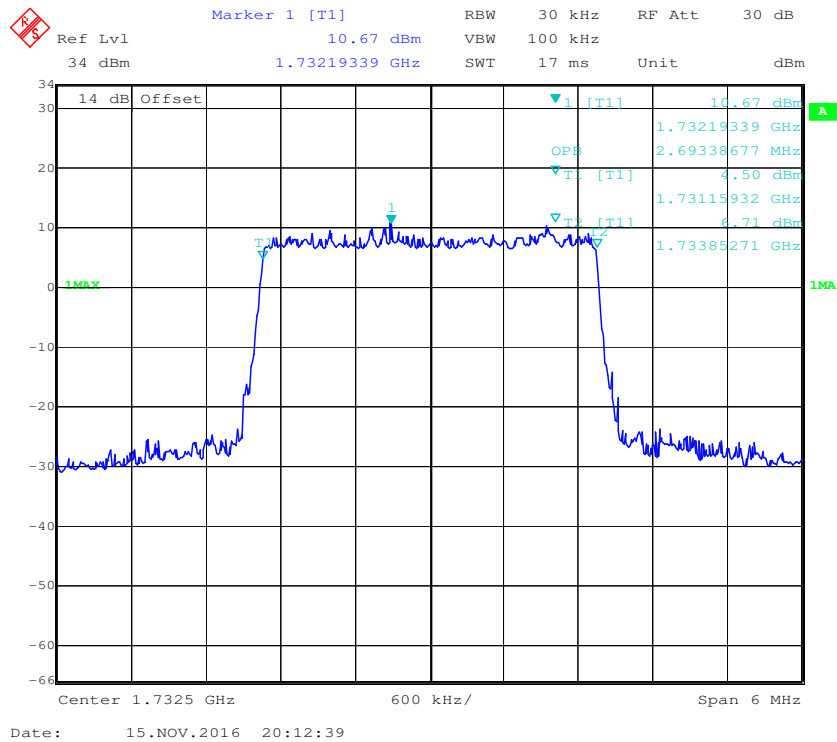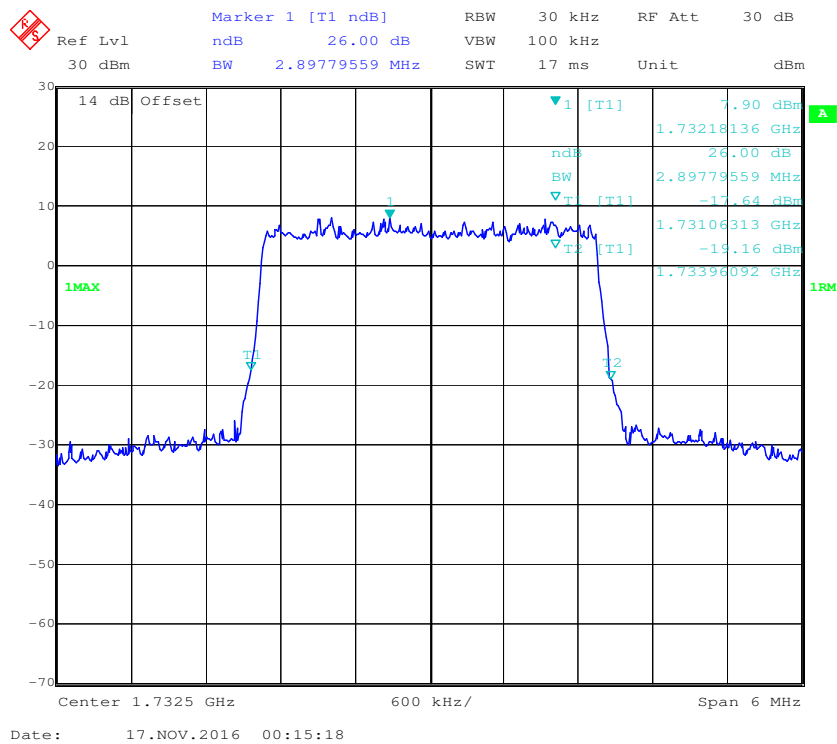16-QAM (3.0 MHz) - 99% Occupied Bandwidth, Middle channel**16-QAM (3.0 MHz) - 26 dB Emissions Bandwidth, Middle channel**

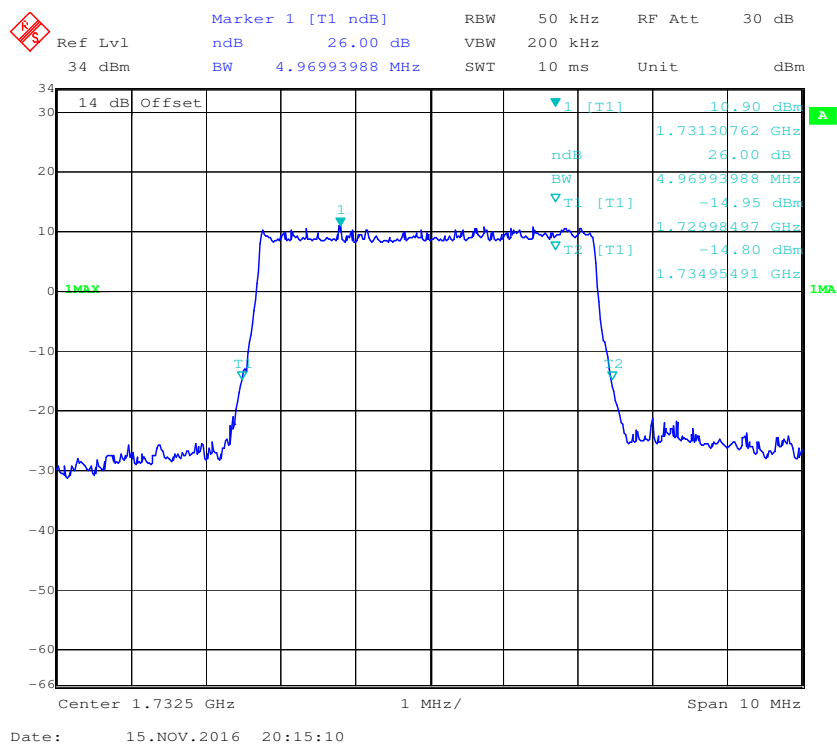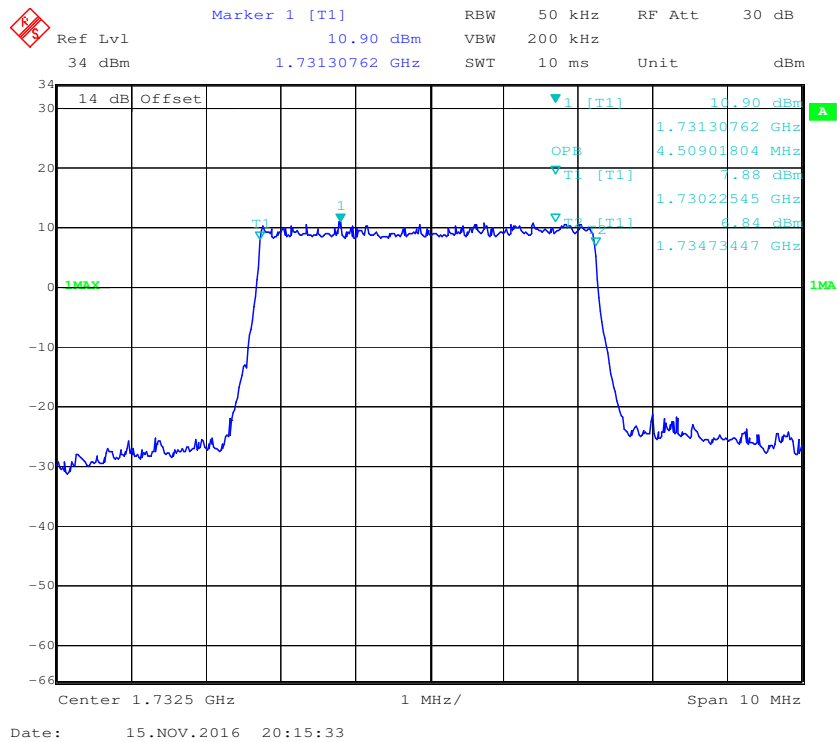


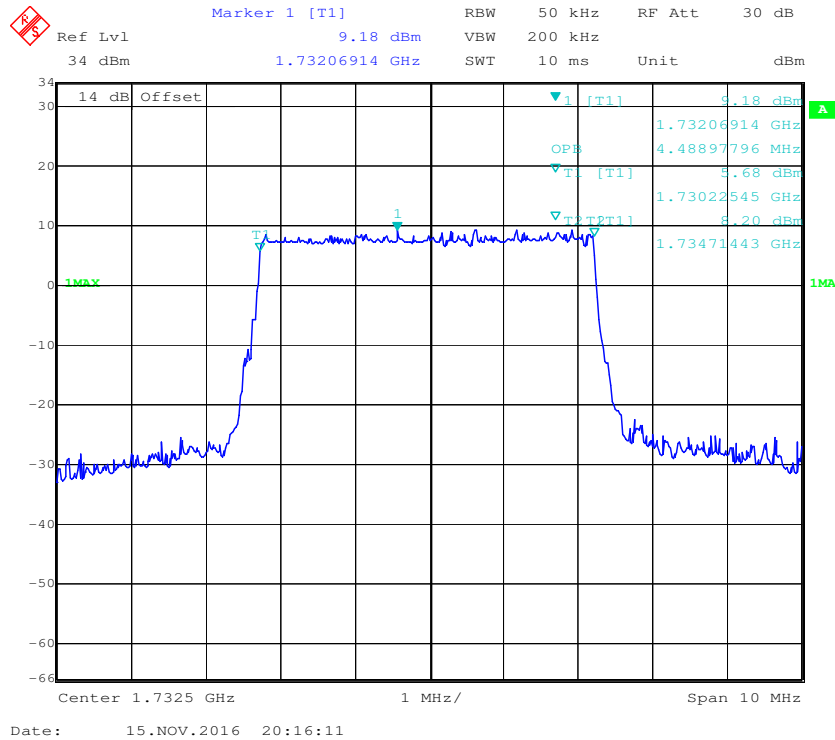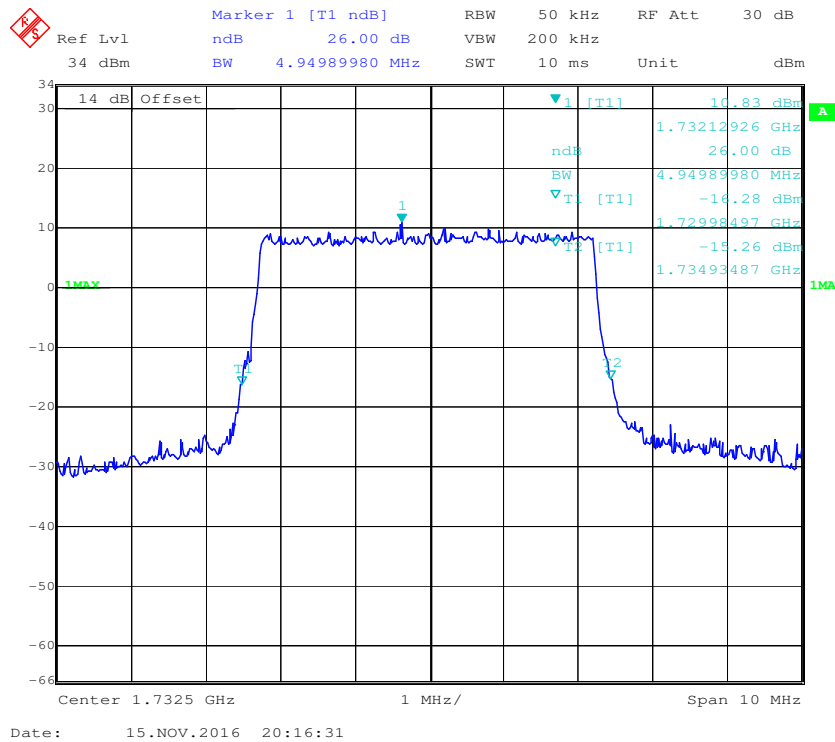16-QAM (5.0 MHz) - 99% Occupied Bandwidth, Middle channel**16-QAM (5.0 MHz) - 26 dB Emissions Bandwidth, Middle channel**


QPSK (10.0 MHz) - 99% Occupied Bandwidth, Middle channel

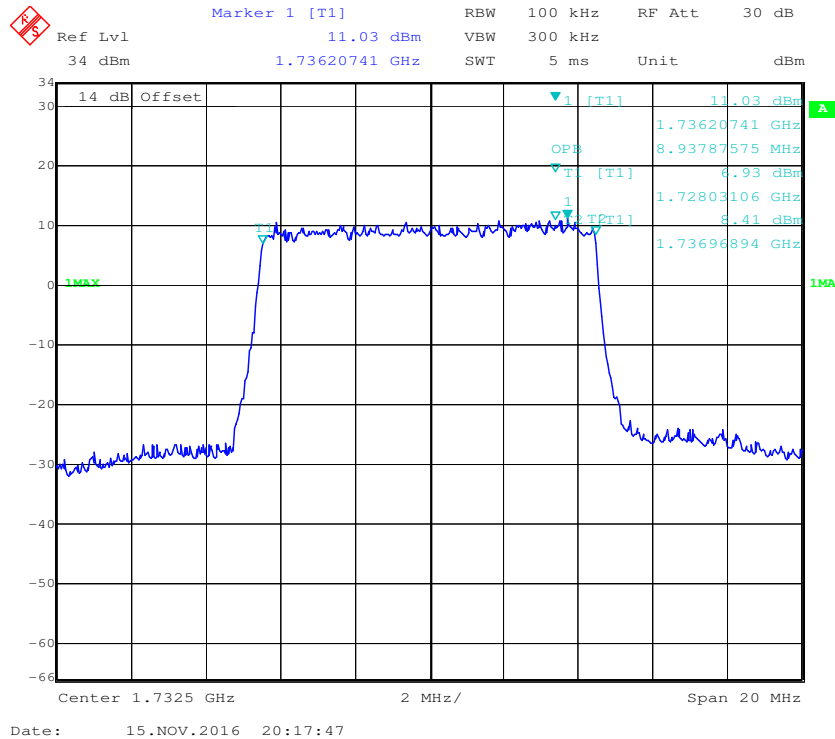


QPSK (10.0 MHz) - 26 dB Emissions Bandwidth, Middle channel


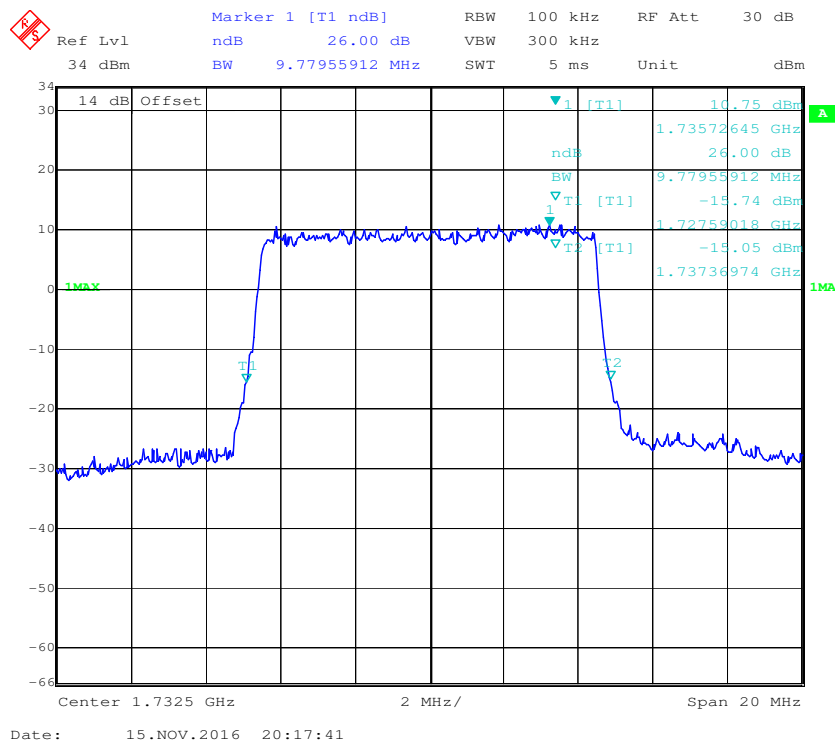


16-QAM (10.0 MHz) - 99% Occupied Bandwidth, Middle channel

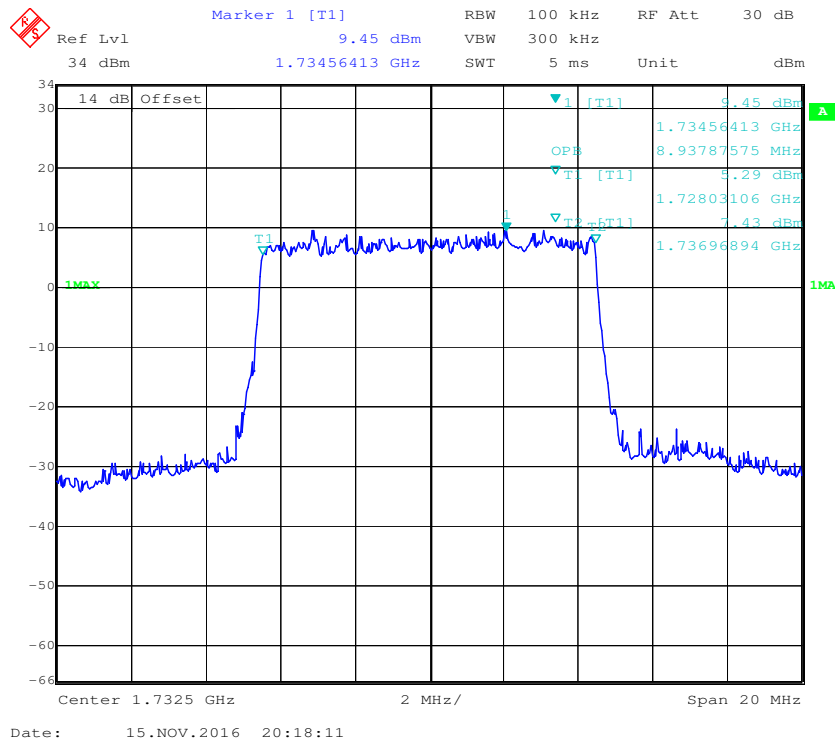


16-QAM (10.0 MHz) - 26 dB Emissions Bandwidth, Middle channel

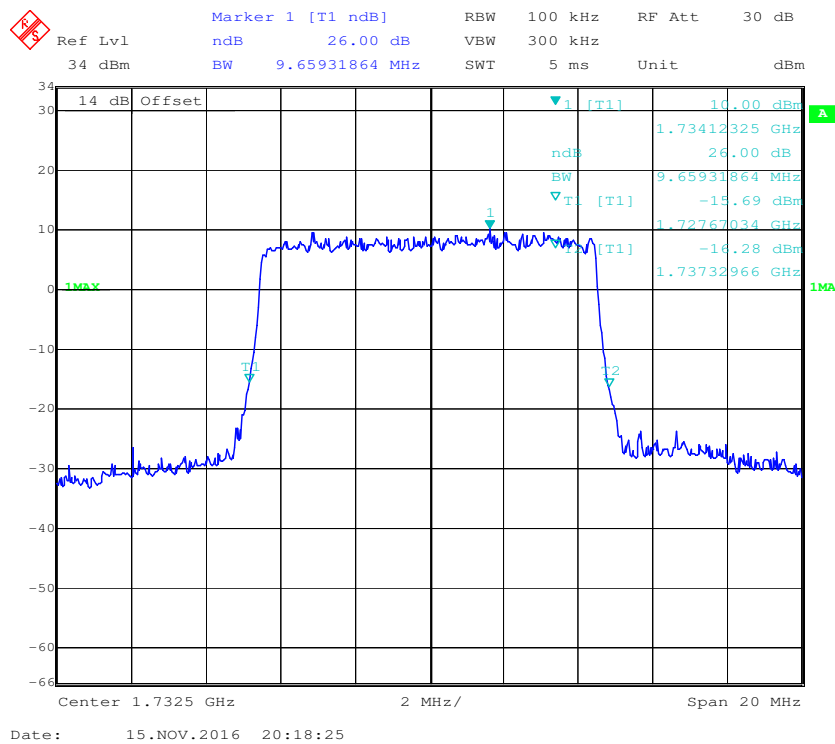


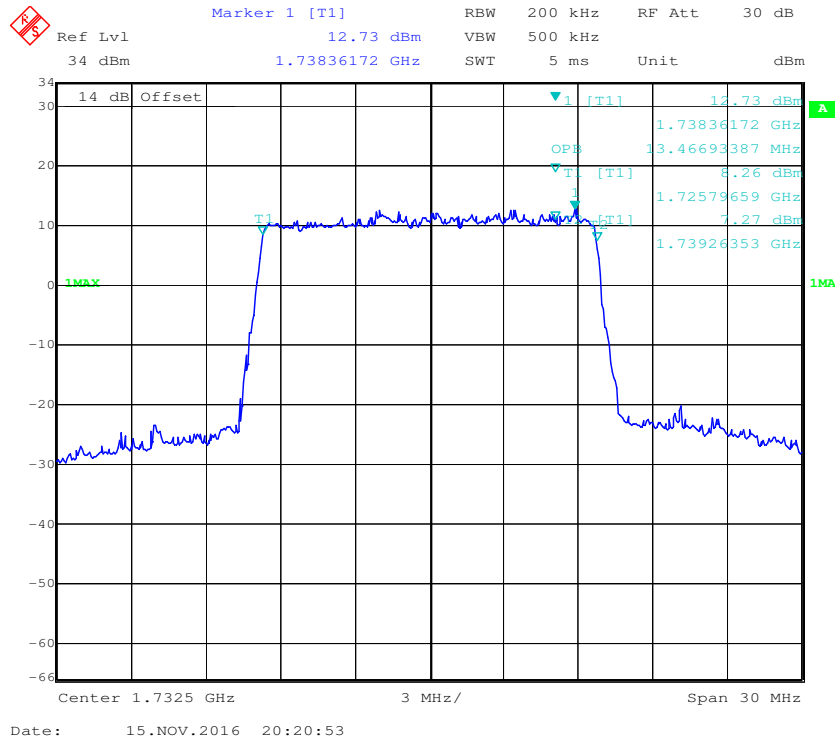
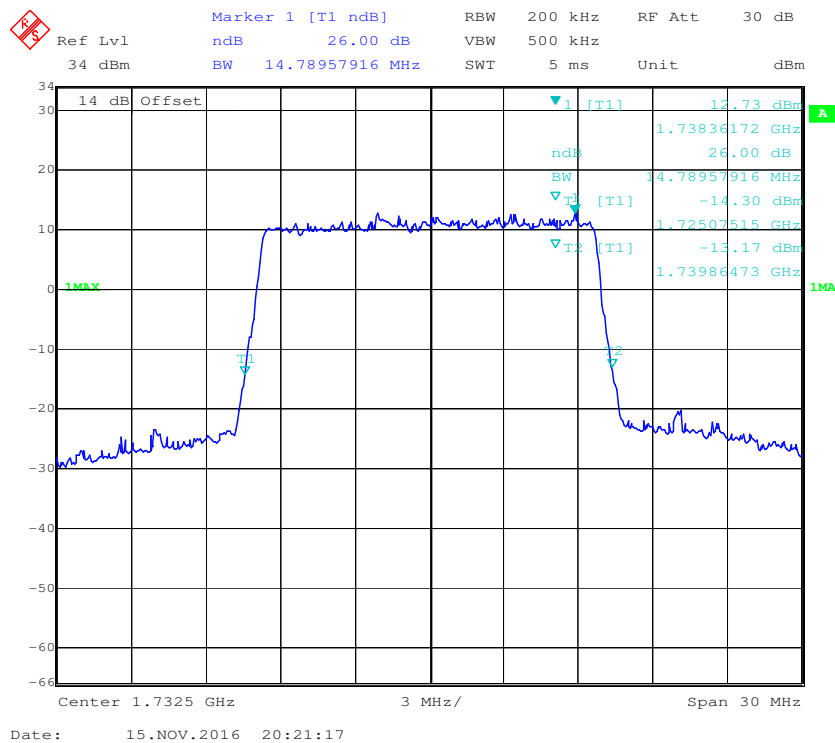
QPSK (15.0 MHz) - 99% Occupied, Middle channel**QPSK (15.0 MHz) - 26 dB Emissions Bandwidth, Middle channel**



16-QAM (15.0 MHz) - 99% Occupied Middle channel

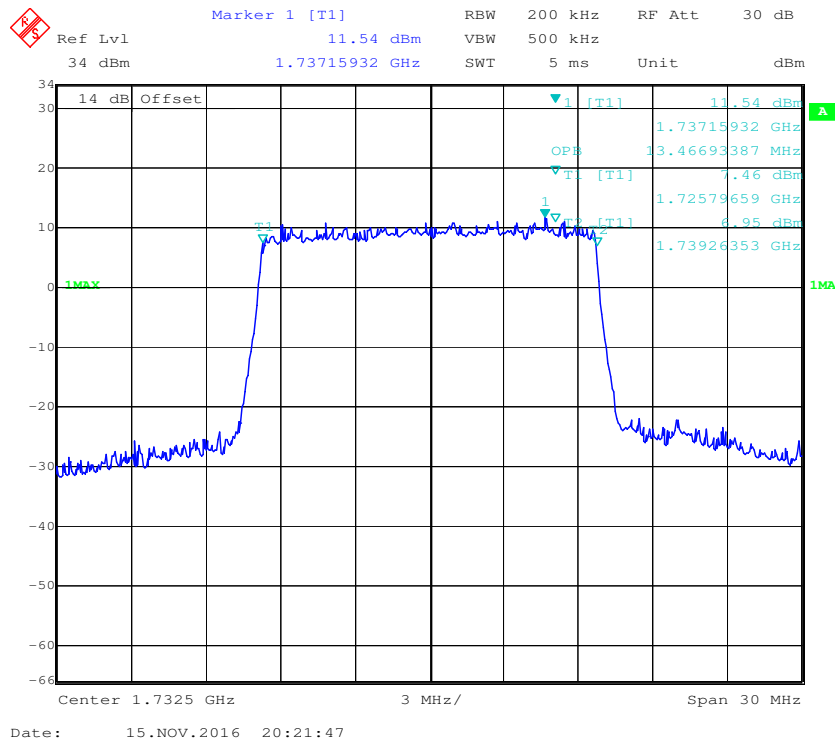

16-QAM (15.0 MHz) - 26 dB Emissions Bandwidth, Middle channel

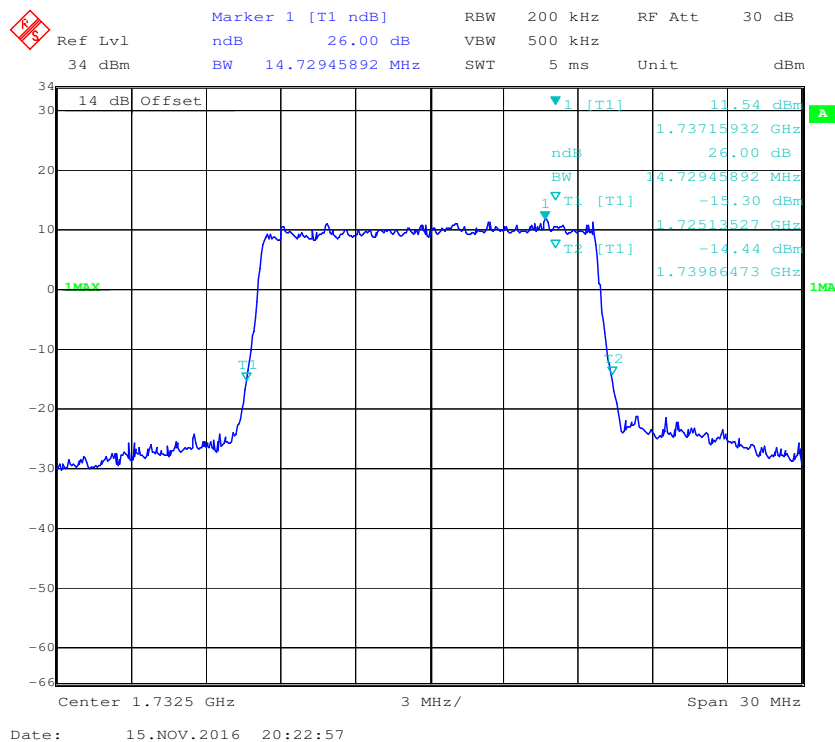

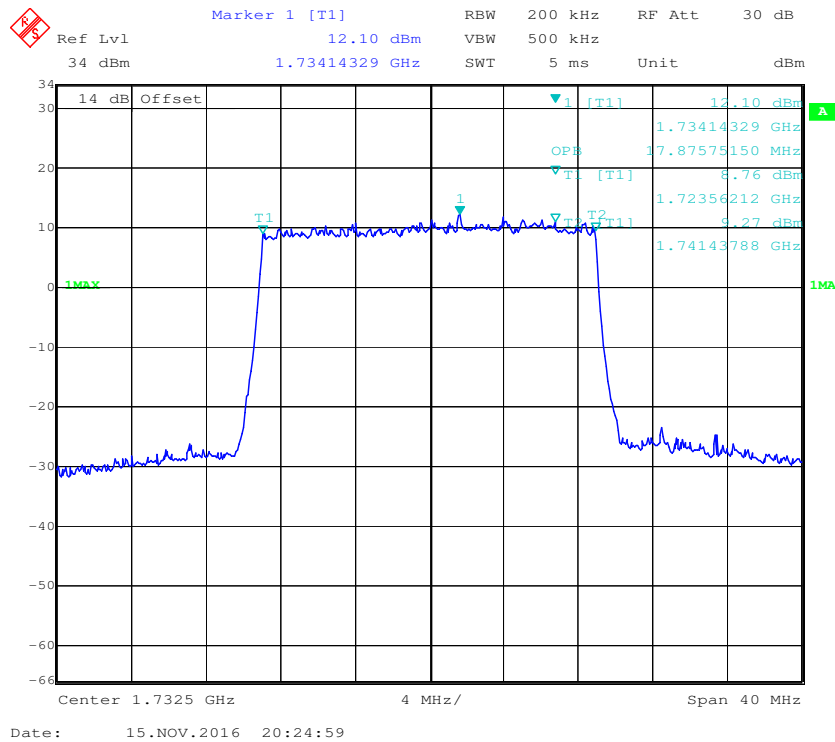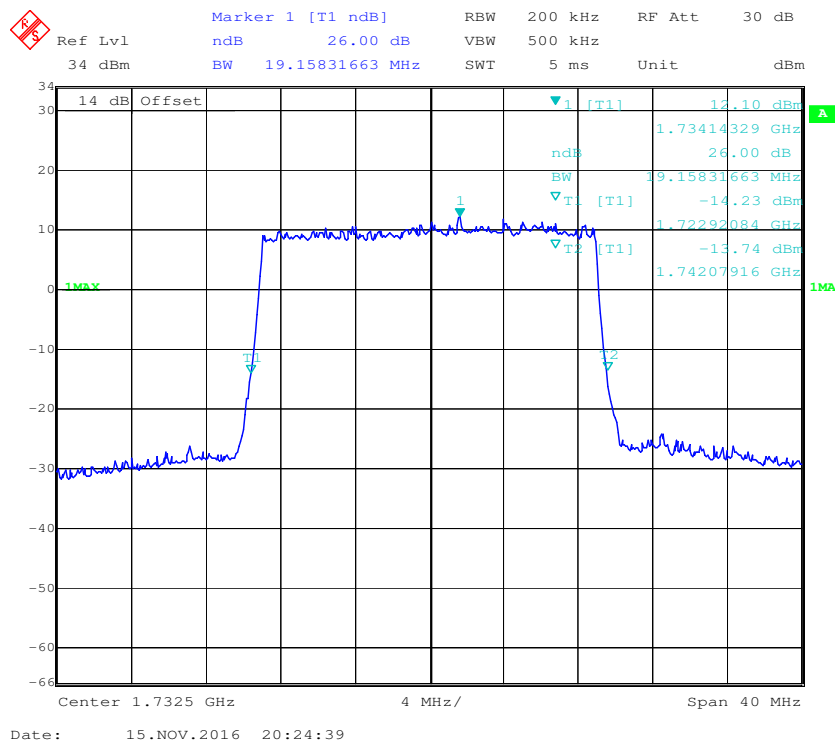
QPSK (20.0 MHz) - 99% Occupied Middle channel**QPSK (20.0 MHz) - 26 dB Emissions Bandwidth, Middle channel**

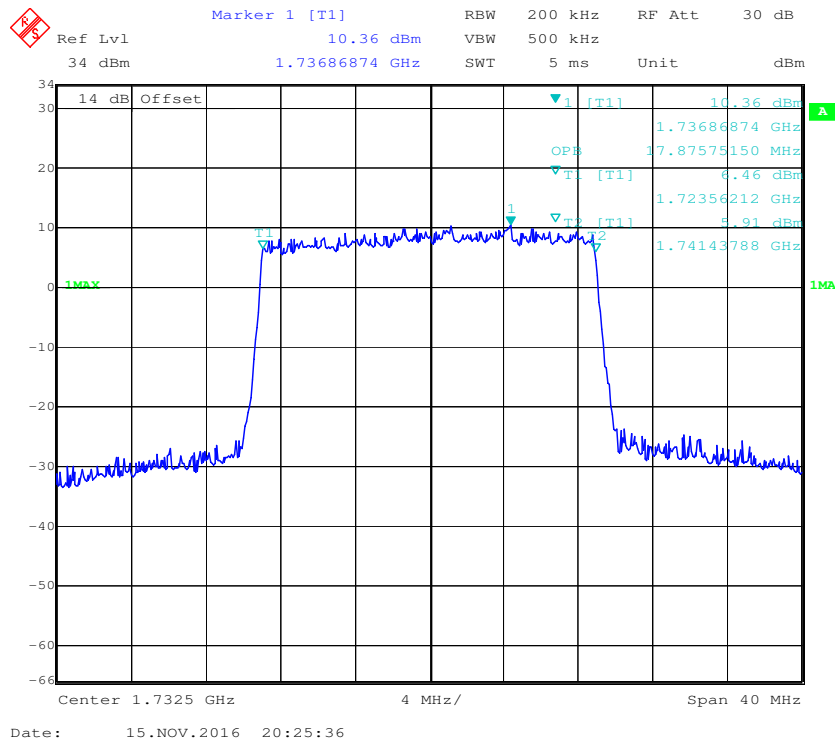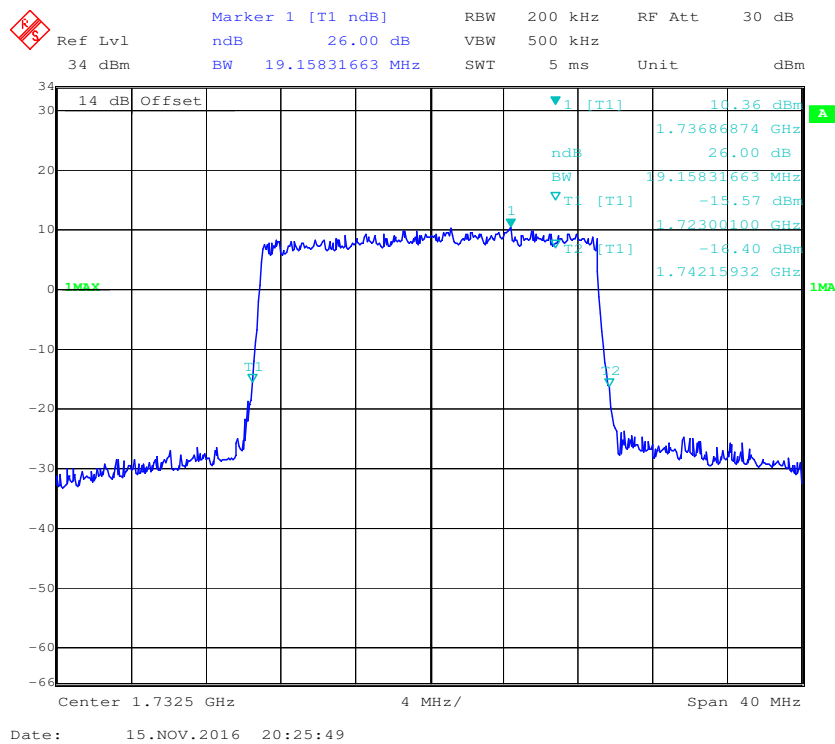16-QAM (20.0 MHz) - 99% Occupied Bandwidth Middle channel**16-QAM (20.0 MHz) - 26 dB Emissions Bandwidth, Middle channel**


LTE Band 7: (Middle Channel)



Bandwidth (MHz)	Modulation	99% Occupied Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
5.0	QPSK	4.489	5.030
	16QAM	4.489	4.990
10.0	QPSK	8.978	9.900
	16QAM	8.938	9.699
15.0	QPSK	13.527	14.910
	16QAM	13.407	14.669
20.0	QPSK	17.956	19.158
	16QAM	17.956	19.399

QPSK (5.0 MHz) - 99% Occupied Bandwidth, Middle channel

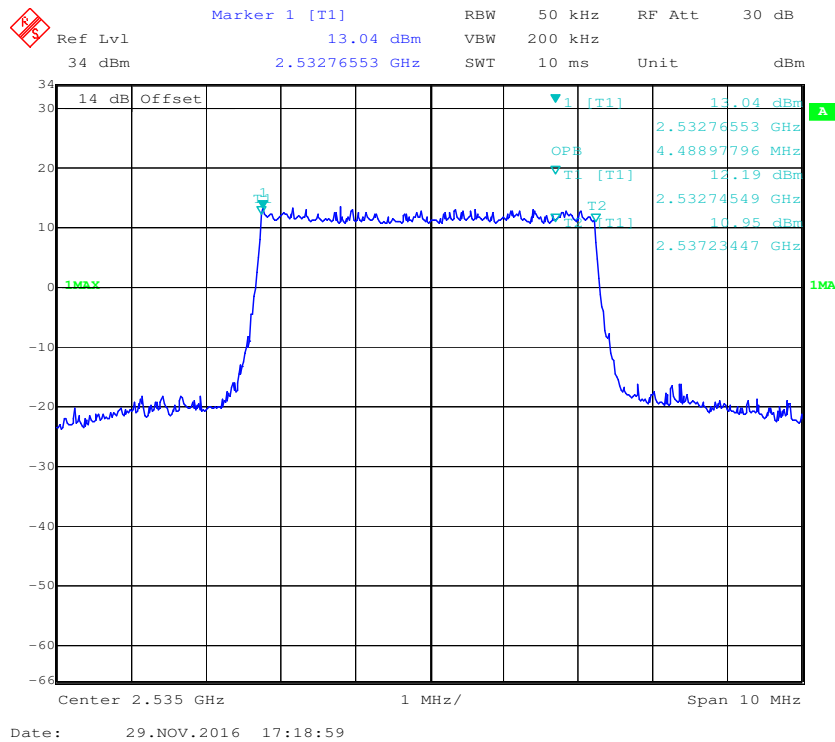


QPSK (5.0 MHz) - 26 dB Emissions Bandwidth, Middle channel

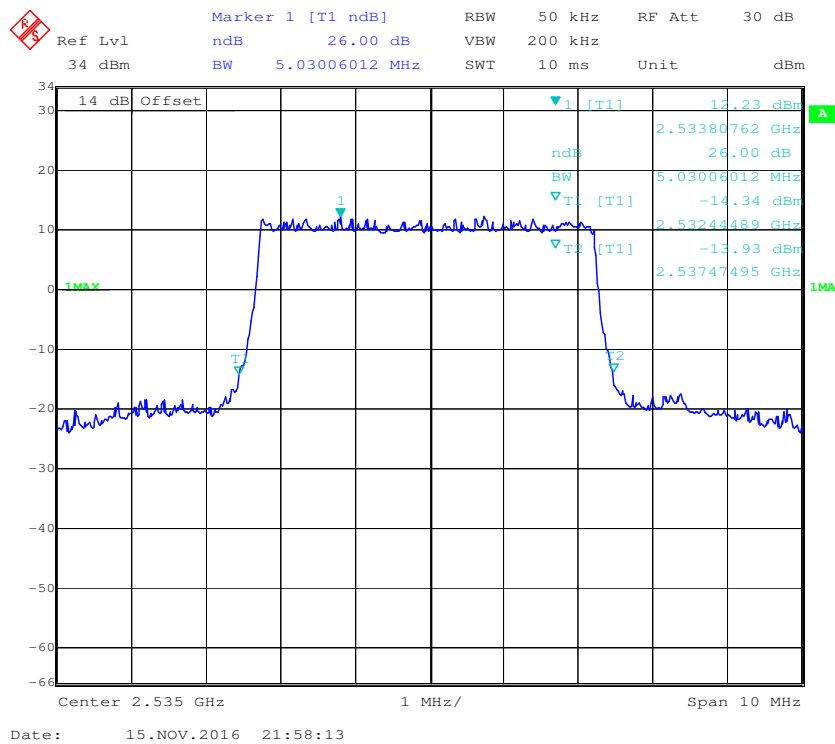


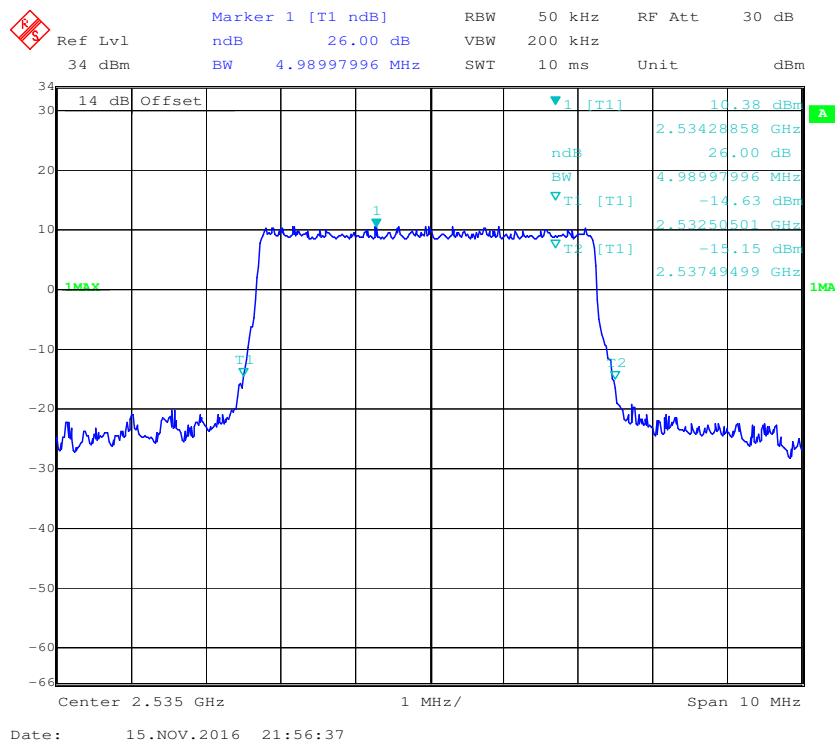
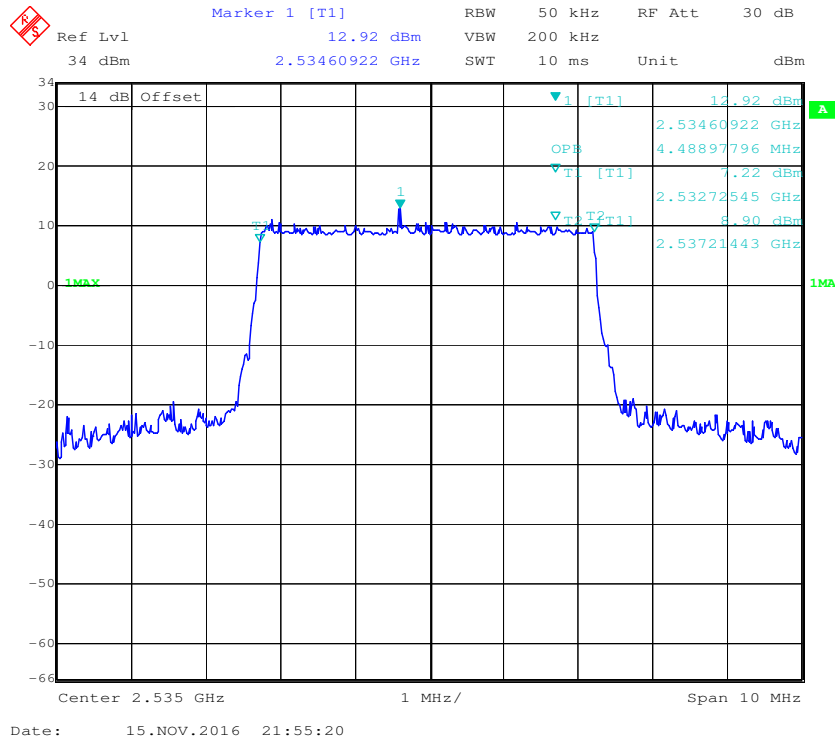


QPSK (10.0 MHz) - 99% Occupied Bandwidth, Middle channel

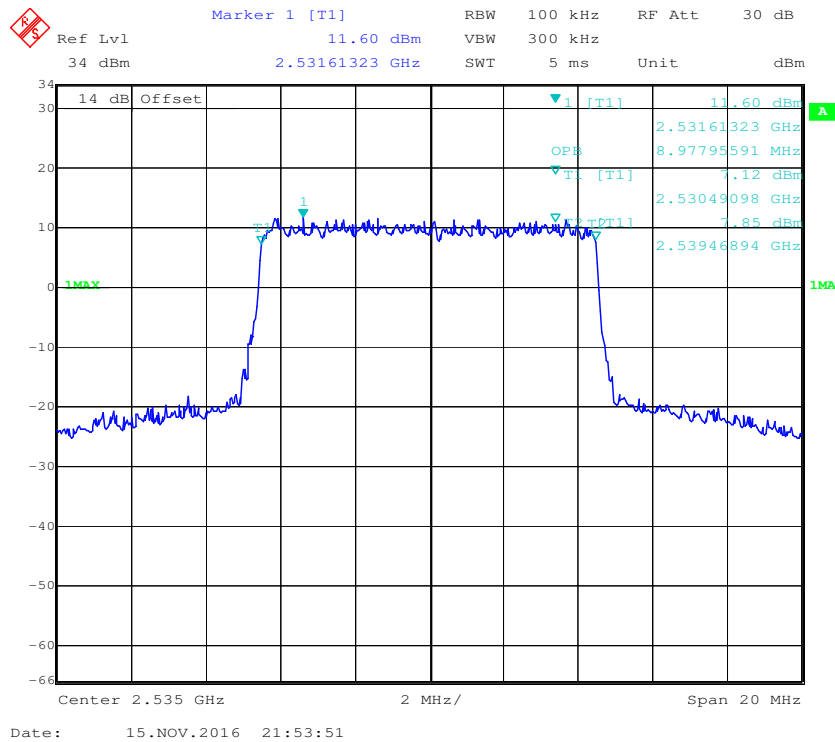


QPSK (10.0 MHz) - 26 dB Emissions Bandwidth, Middle channel

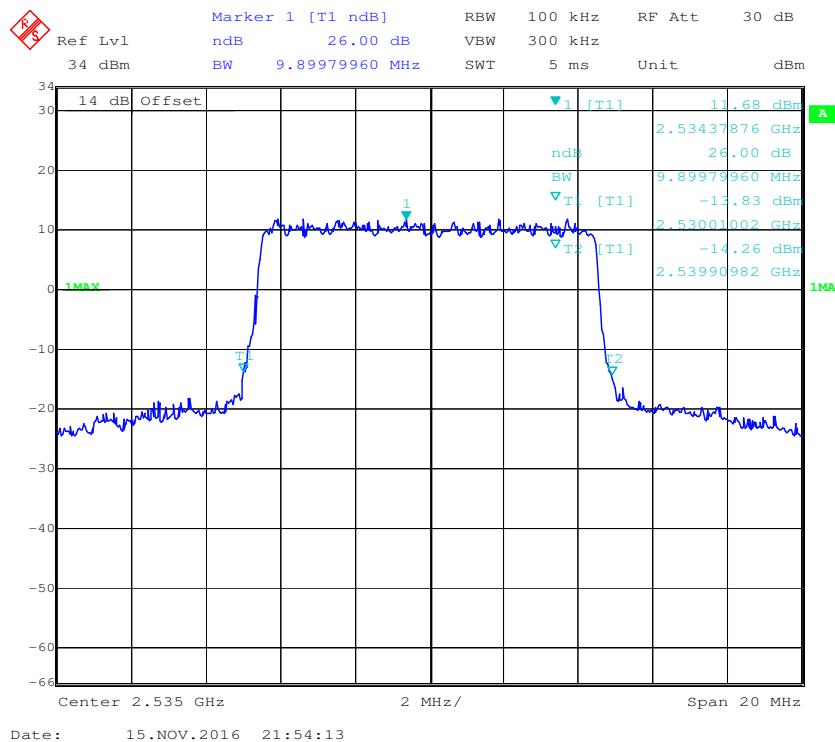


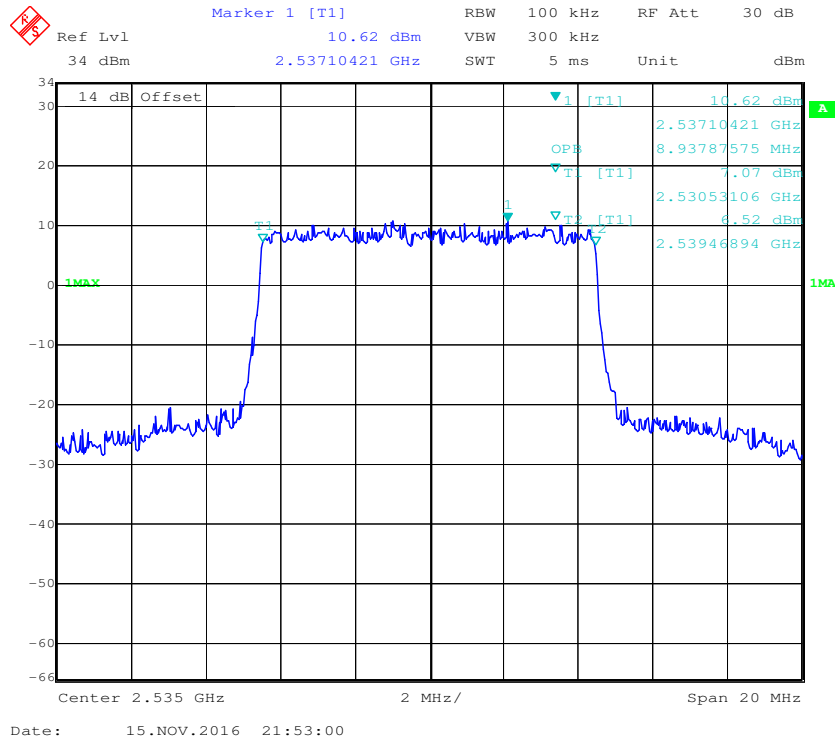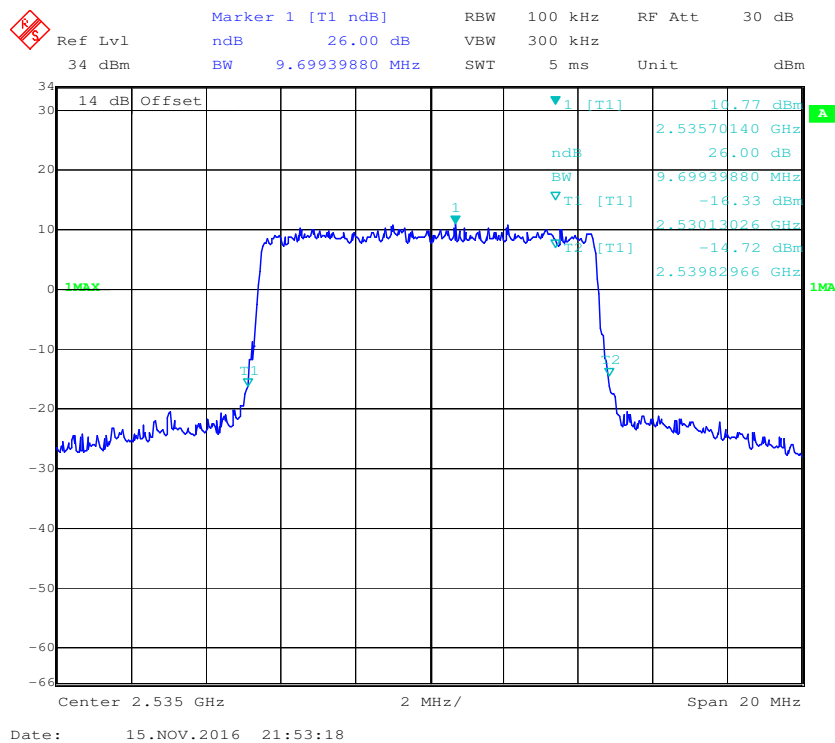16-QAM (10.0 MHz) - 99% Occupied Bandwidth, Middle channel**16-QAM (10.0 MHz) - 26 dB Emissions Bandwidth, Middle channel**


QPSK (15.0 MHz) - 99% Occupied, Middle channel

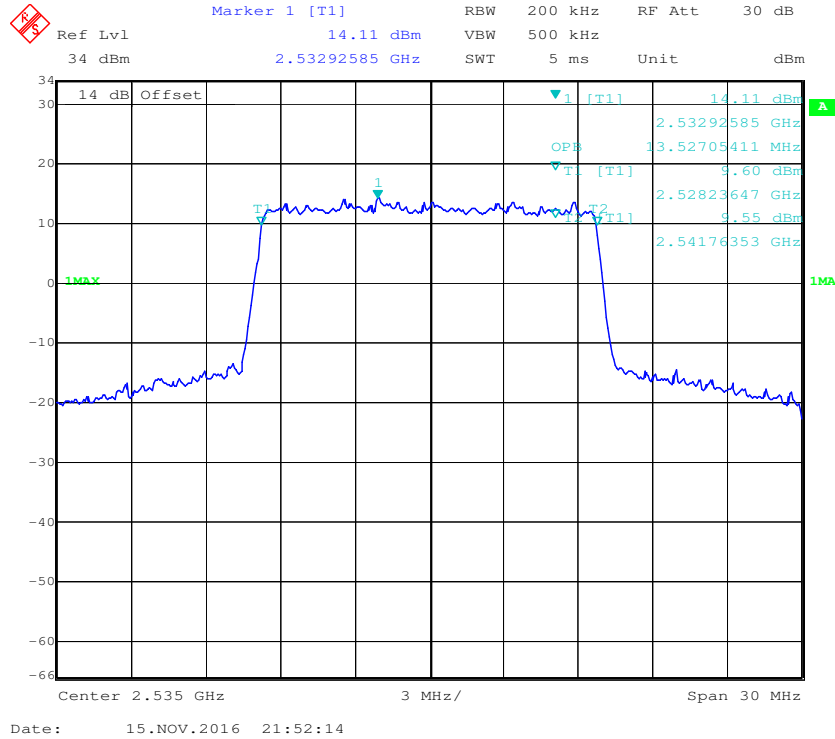


QPSK (15.0 MHz) - 26 dB Emissions Bandwidth, Middle channel


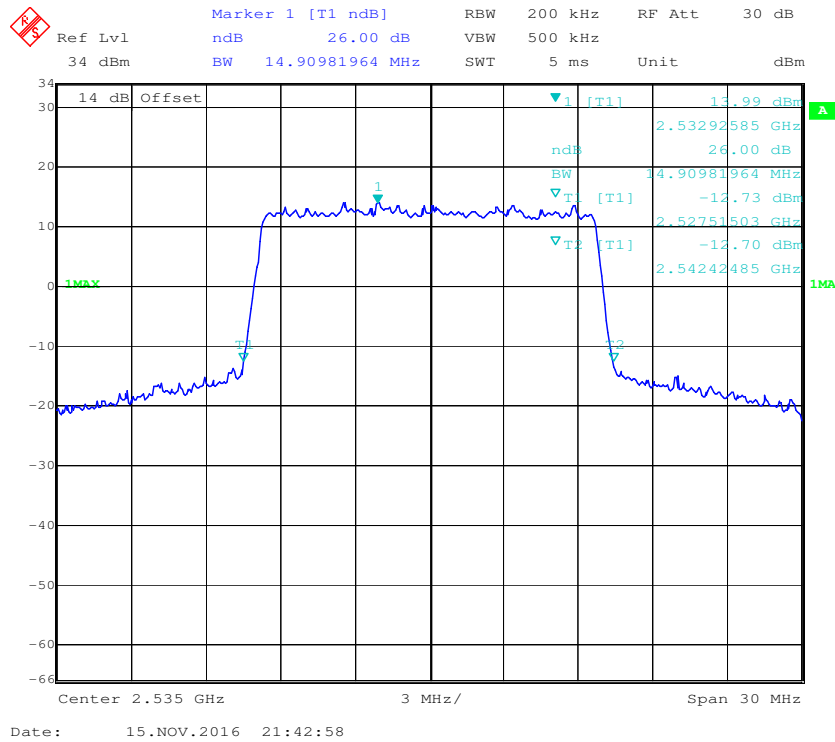




16-QAM (15.0 MHz) - 99% Occupied Middle channel

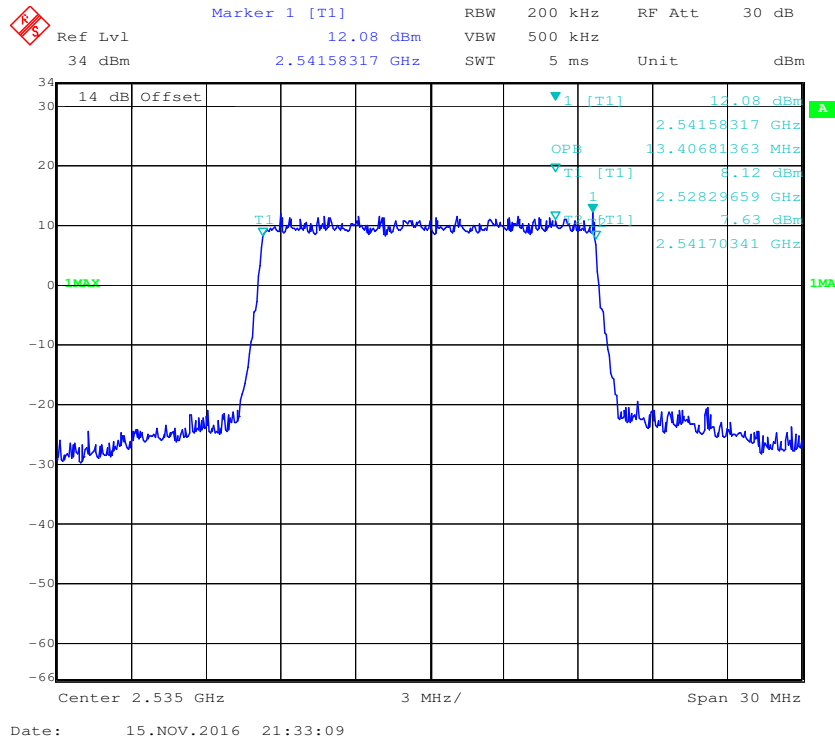

16-QAM (15.0 MHz) - 26 dB Emissions Bandwidth, Middle channel


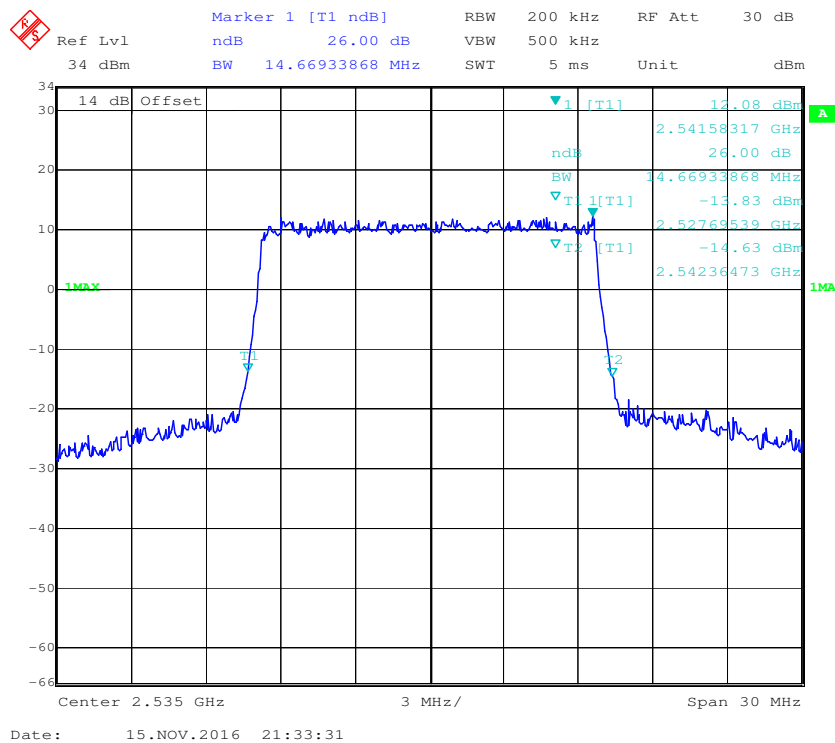


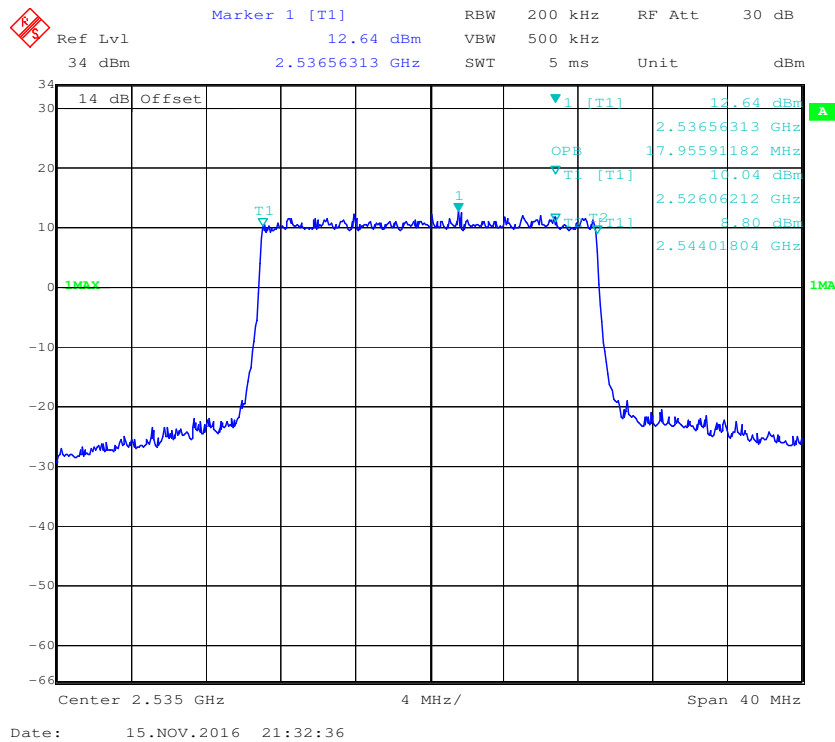
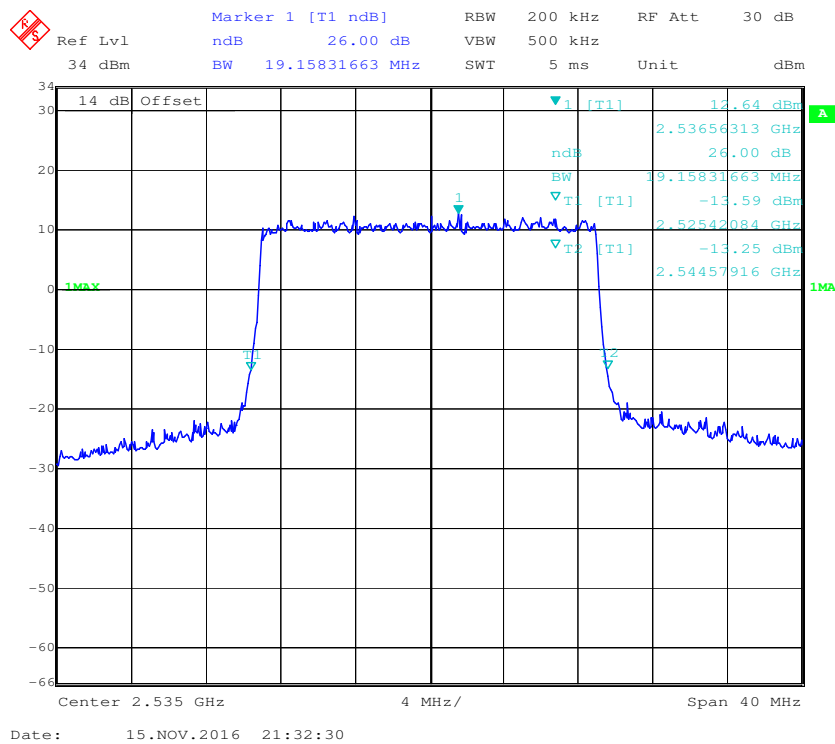
QPSK (20.0 MHz) - 99% Occupied Middle channel**QPSK (20.0 MHz) - 26 dB Emissions Bandwidth, Middle channel**

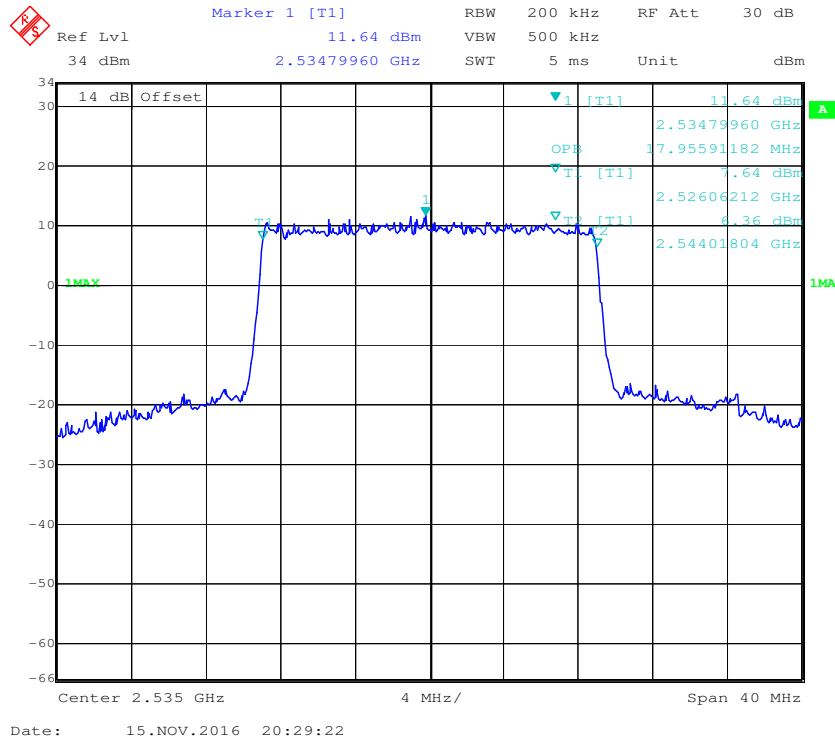
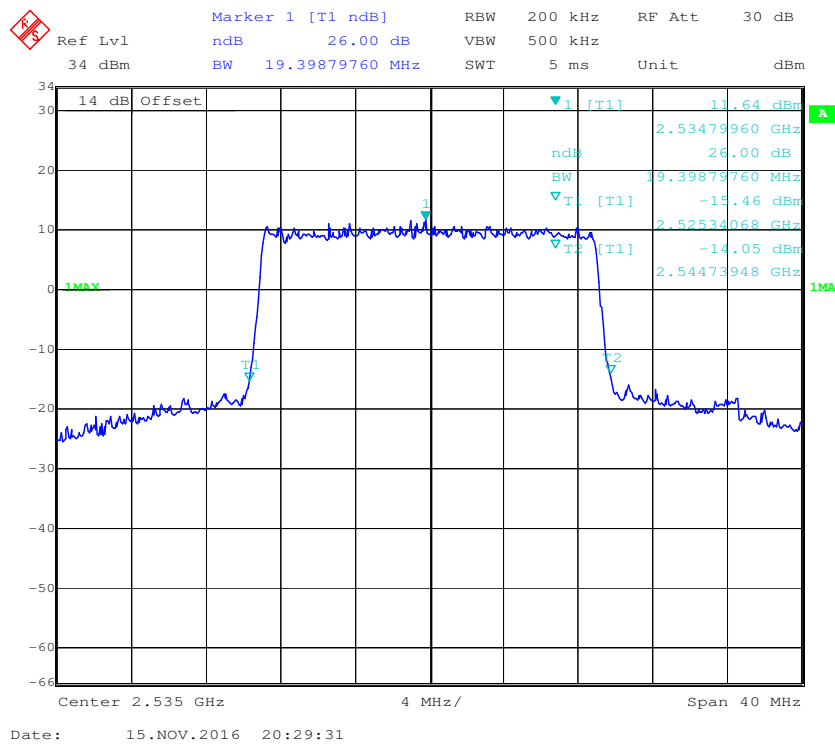
16-QAM (20.0 MHz) - 99% Occupied Bandwidth Middle channel**16-QAM (20.0 MHz) - 26 dB Emissions Bandwidth, Middle channel**

LTE Band 17: (Middle Channel)

Bandwidth (MHz)	Modulation	99% Occupied Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
5.0	QPSK	4.489	4.950
	16QAM	4.509	4.970
10.0	QPSK	9.018	9.780
	16QAM	9.018	9.619

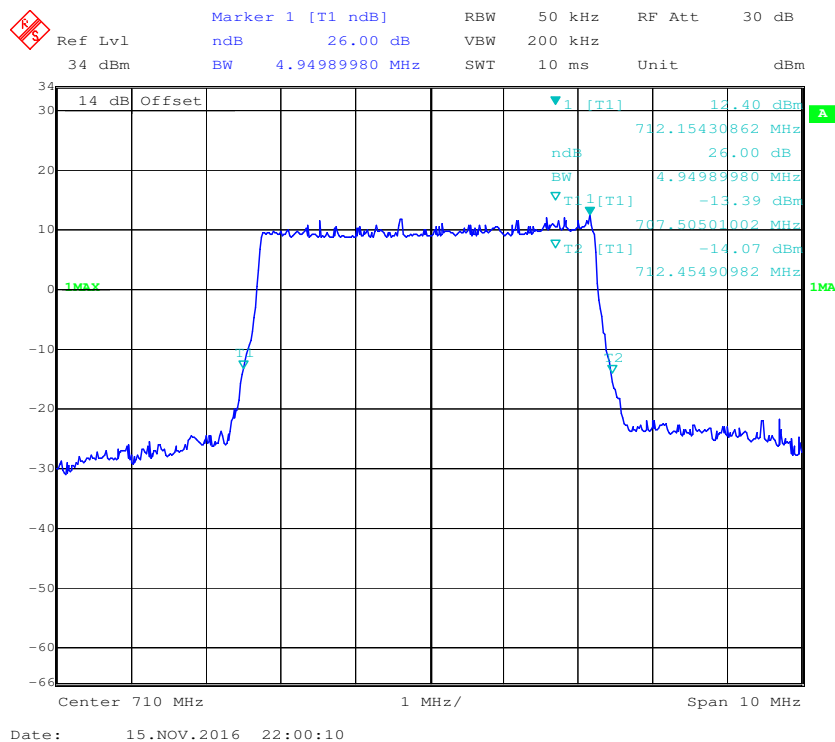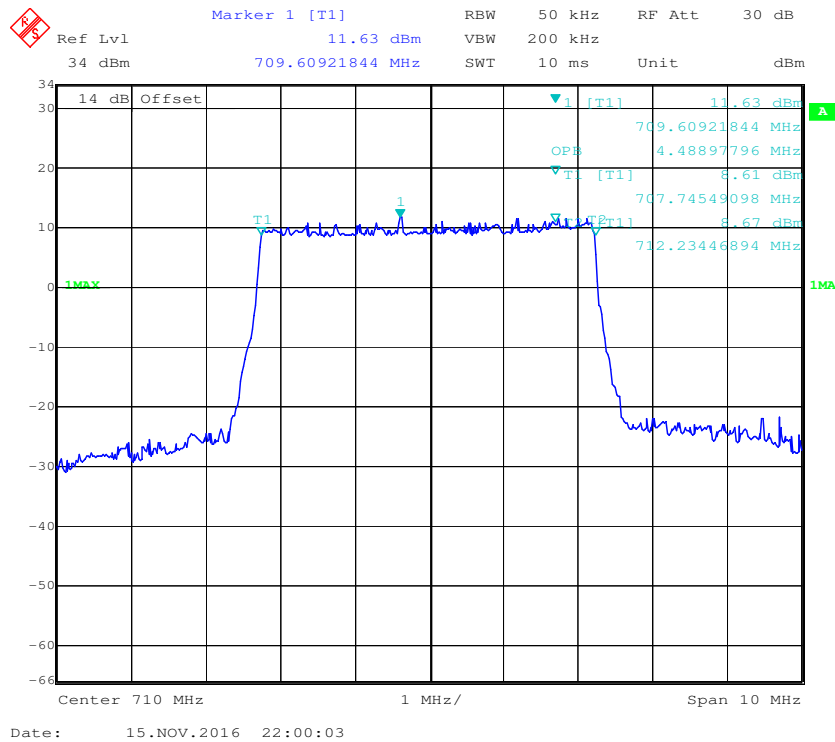

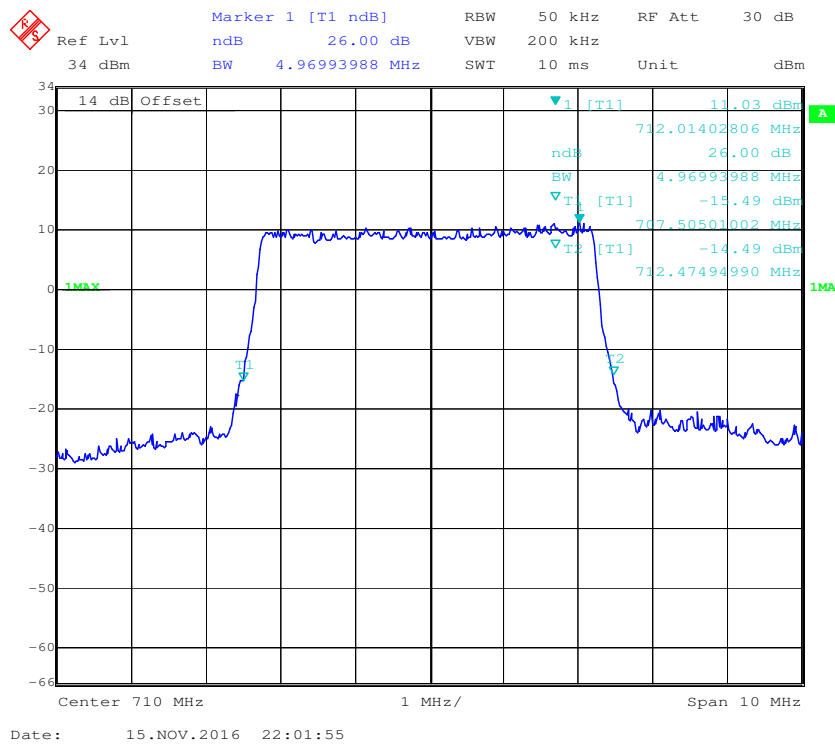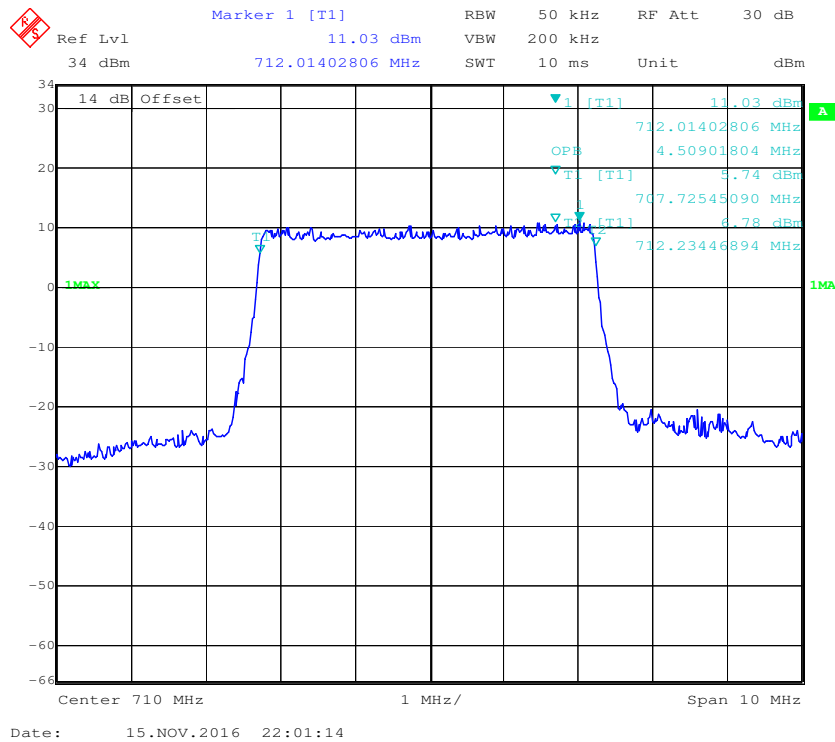

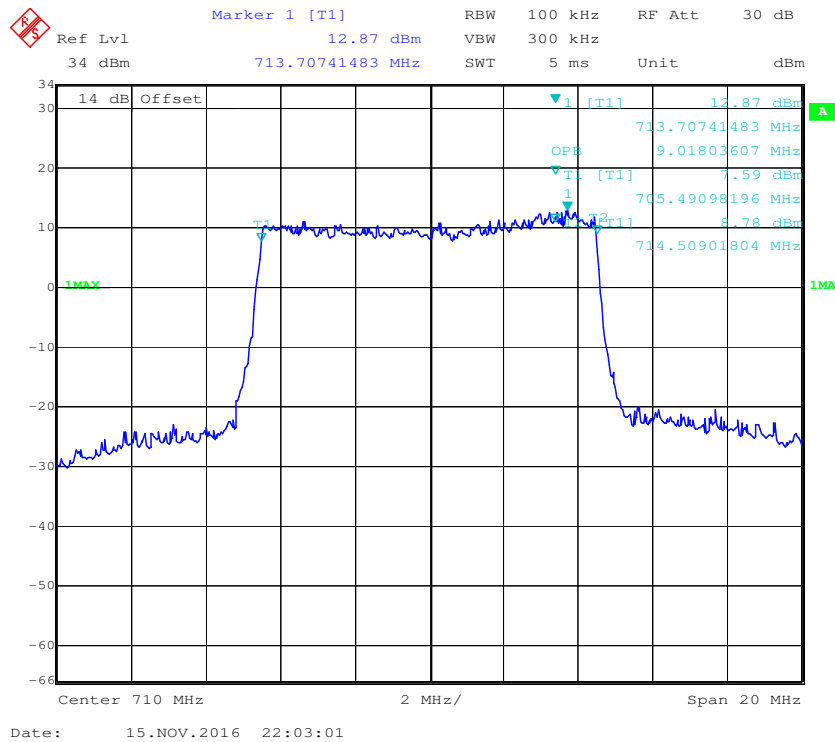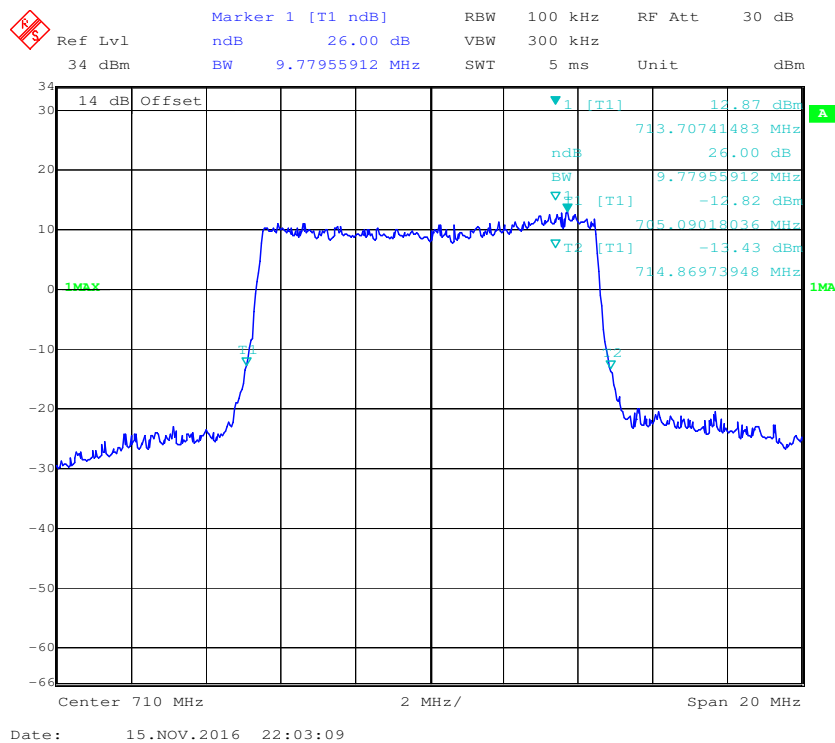QPSK (10.0 MHz) - 99% Occupied & 26 dB Emissions, Middle channel**16-QAM (10.0 MHz) - 99% Occupied & 26 dB Emissions, Middle channel**

Marker 1 [T1]

Ref Lvl	34 dBm	Offset	Unit	dBm
RBW	100 kHz			
VBW	300 kHz			
SWT	5 ms			

Center 710 MHz 2 MHz/ Span 20 MHz

Date: 15.NOV.2016 22:03:36

Ref Lvl 34 dBm

Marker 1 [T1 ndB] 26.00 dB

RBW 100 kHz

VBW 300 kHz

SWT 5 ms

RF Att 30 dB

Unit dBm

Marker	Frequency	Power
1	713.78757515 MHz	-12.13 dBm
2	714.78957916 MHz	-11.82 dBm

Center 710 MHz

2 MHz/

Span 20 MHz

Date: 15.NOV.2016 22:03:56

§ 2.1051; § 22.917 (a); § 24.238 (a); §27.53 (h) (m) SPURIOUS EMISSIONS AT ANTENNA TERMINALS


Applicable Standards

FCC §2.1051, §22.917(a) and §24.238(a) and §27.53(h) (m).

The spectrum was to be investigated to the tenth harmonics of the highest fundamental frequency as specified in § 2.1051.

Test Procedure

The RF output of the transceiver was connected to a spectrum analyzer and simulator through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 1MHz. Sufficient scans were taken to show any out of band emissions up to 10th harmonic.

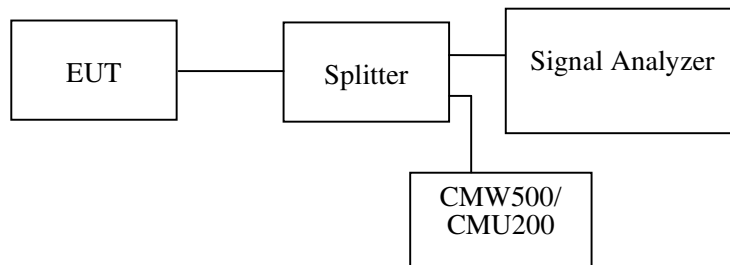

Test Data


Environmental Conditions

Temperature:	23~25℃
Relative Humidity:	53~55 %
ATM Pressure:	100.0~101.0 kPa


The testing was performed by Bin Mei on 2016-11-14 to 2016-11-15.

Cellular Band (Part 22H)


30 MHz – 1 GHz (GSM Mode)

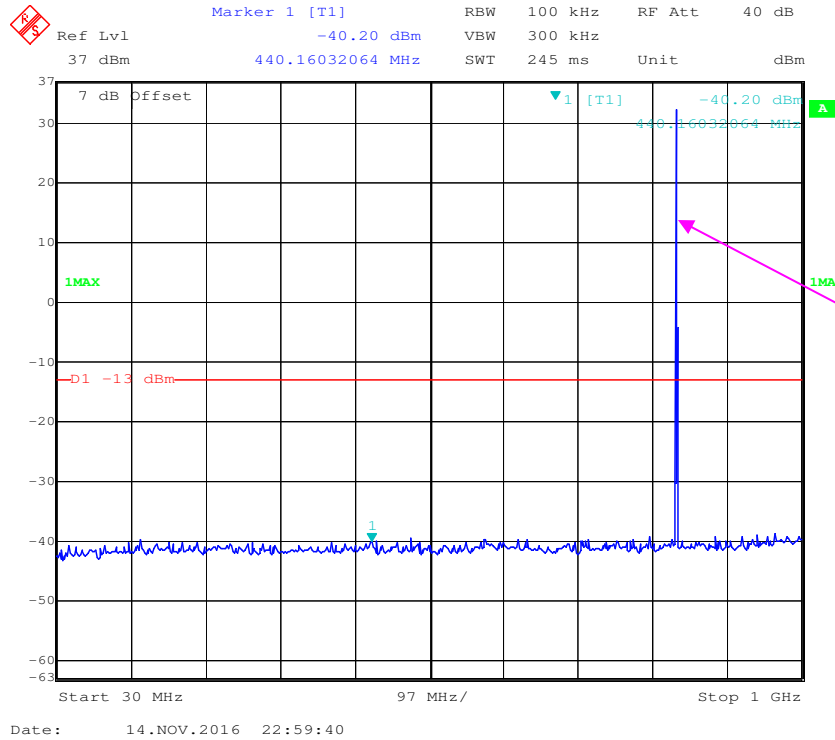


1 GHz – 10 GHz (GSM Mode)

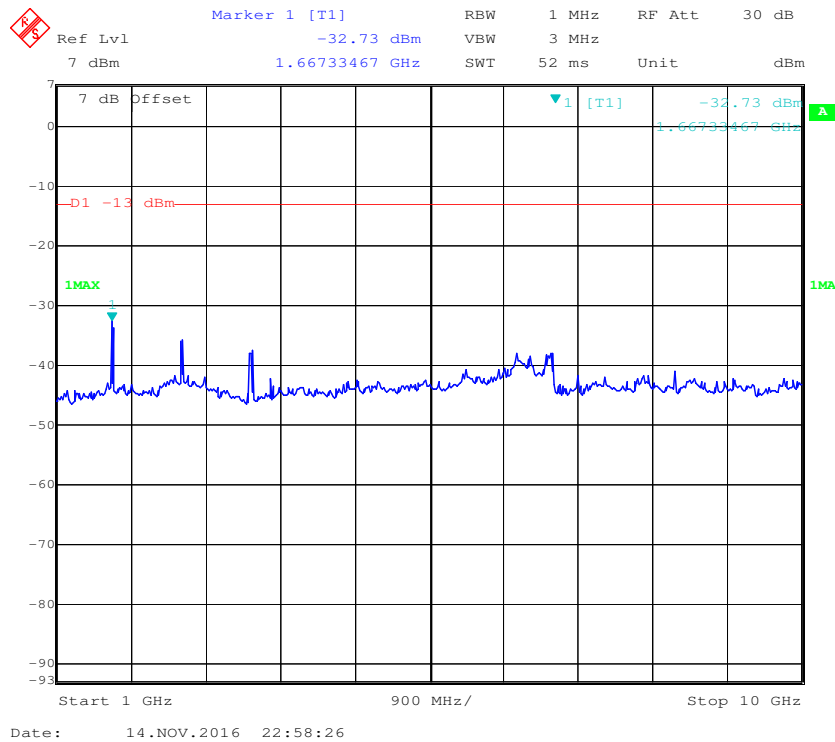

30 MHz – 1 GHz (WCDMA Mode)

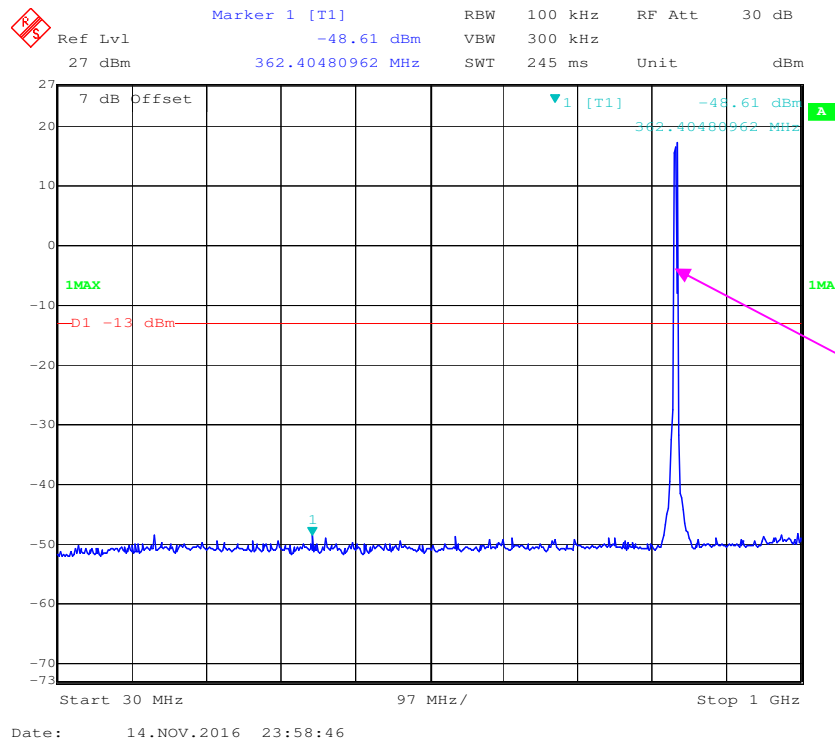


1 GHz – 10 GHz (WCDMA Mode)

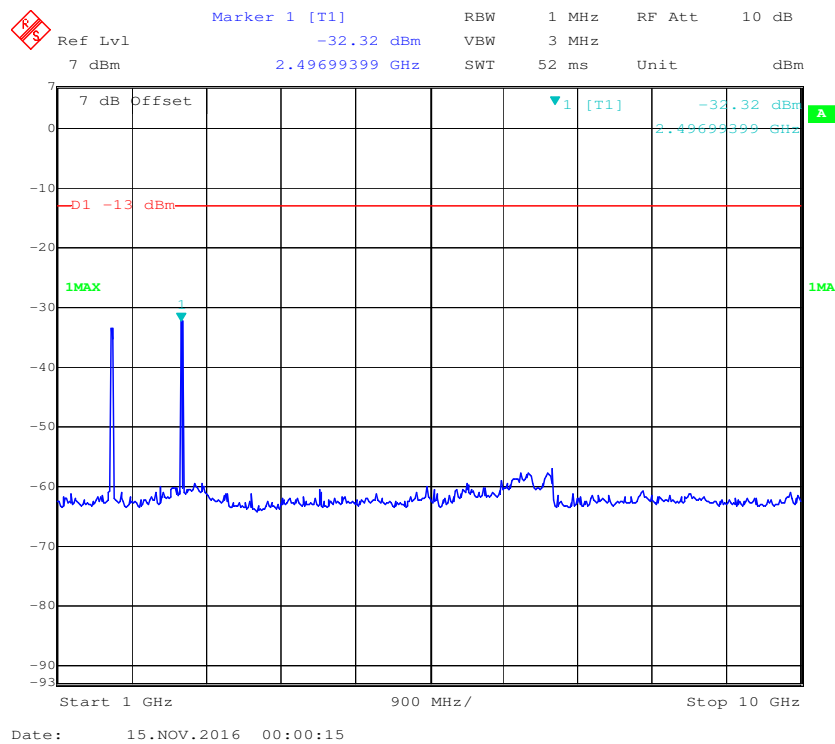


PCS Band (Part 24E)


30 MHz – 1 GHz (GSM Mode)

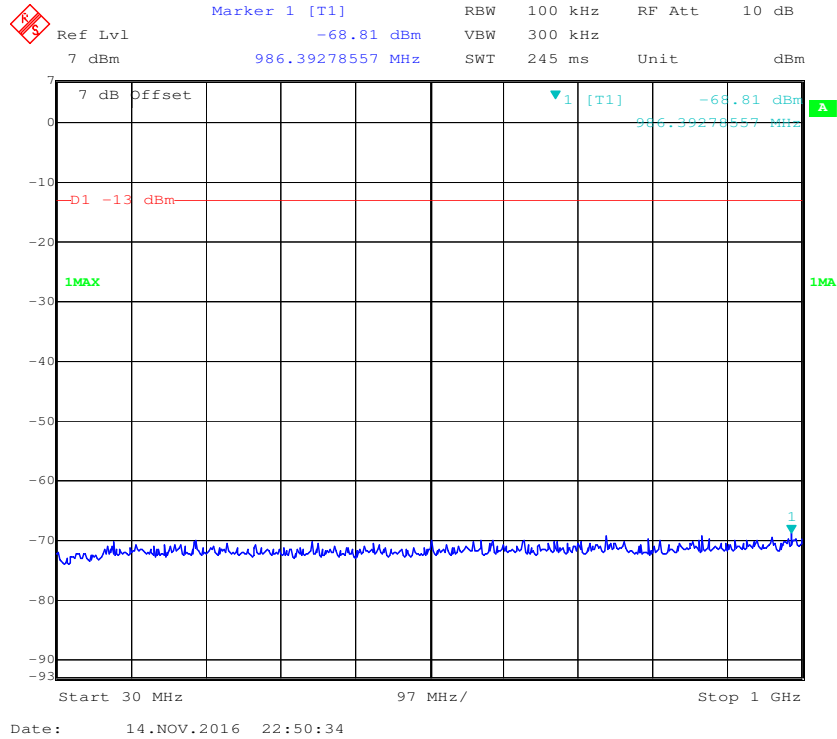


1 GHz – 2 GHz (GSM Mode)

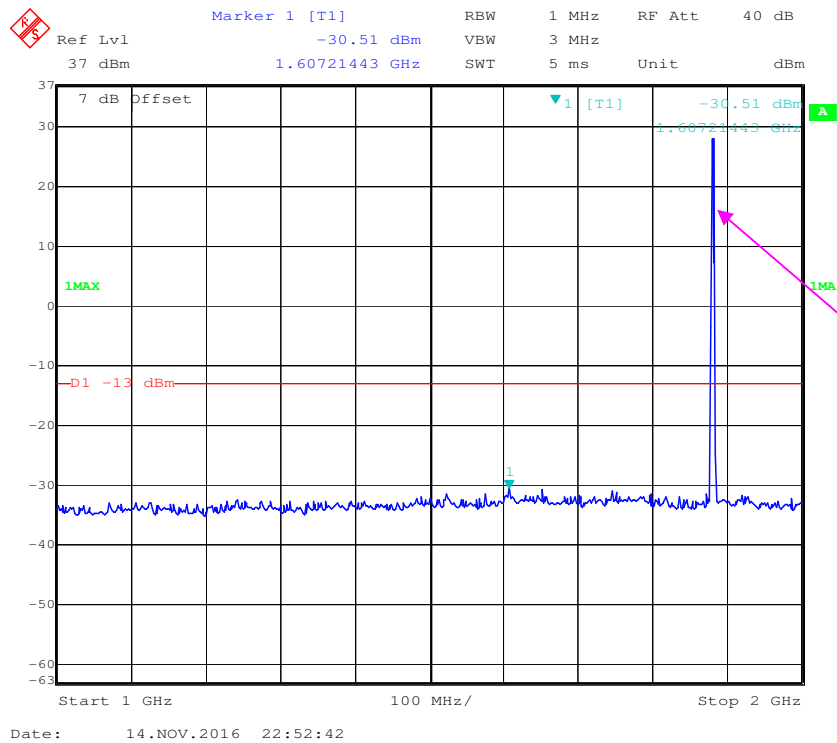


2 GHz – 20 GHz (GSM Mode)

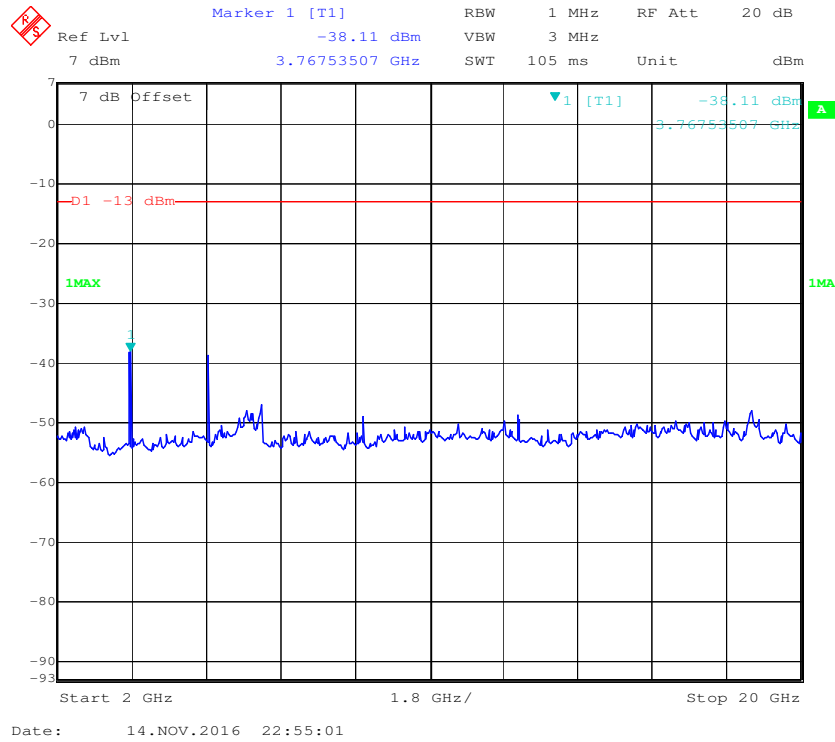

30 MHz – 1 GHz (WCDMA Mode)

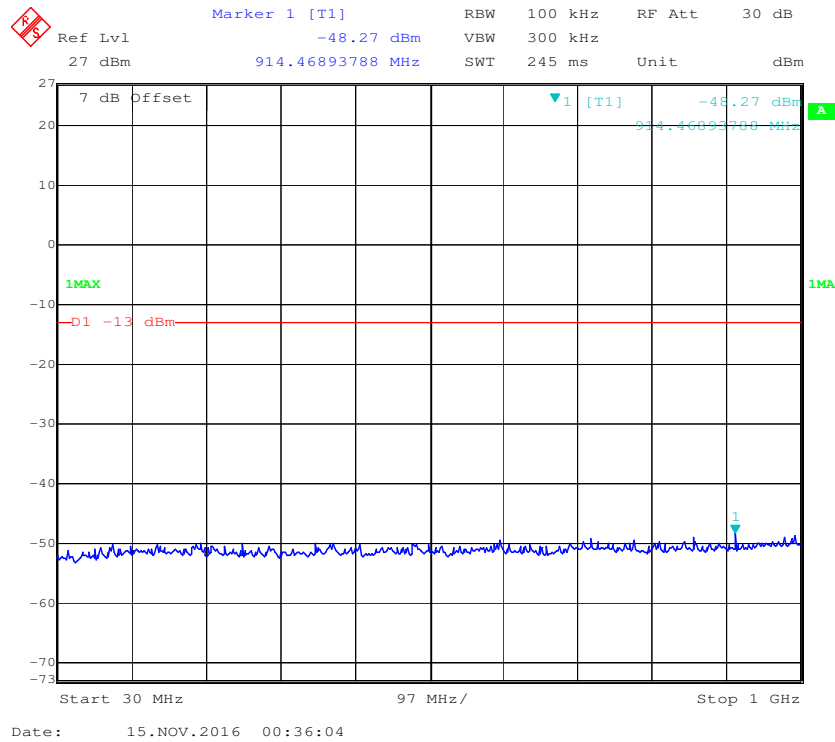




1 GHz – 2 GHz (WCDMA Mode)

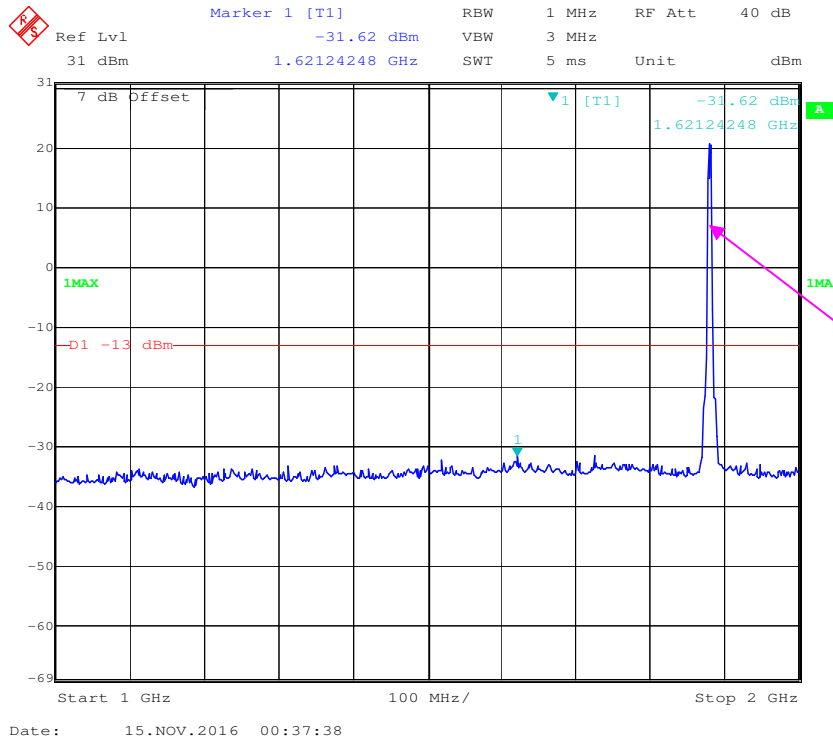


Fundamental test

2 GHz – 20 GHz (WCDMA Mode)

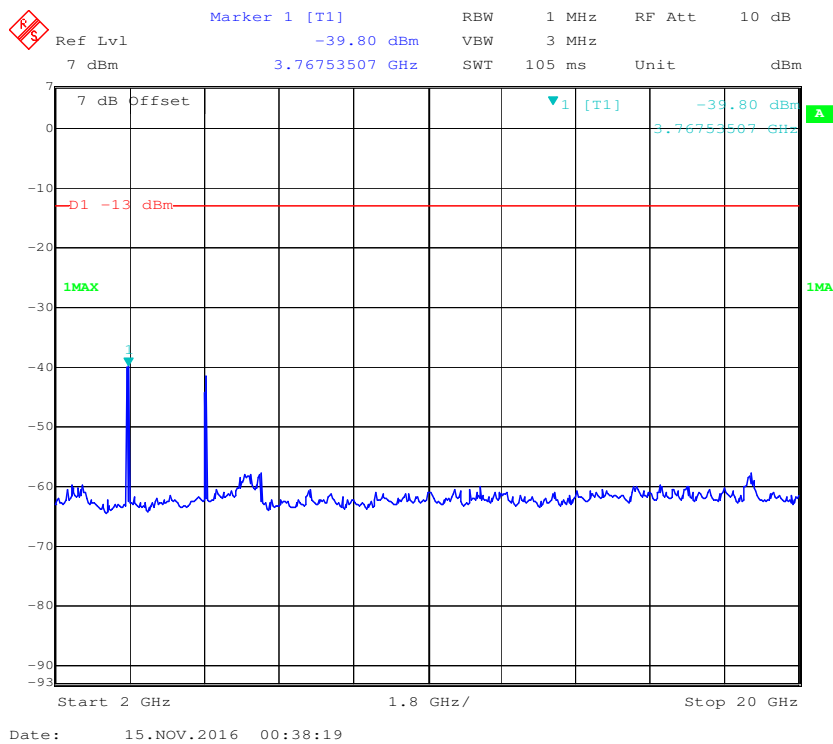


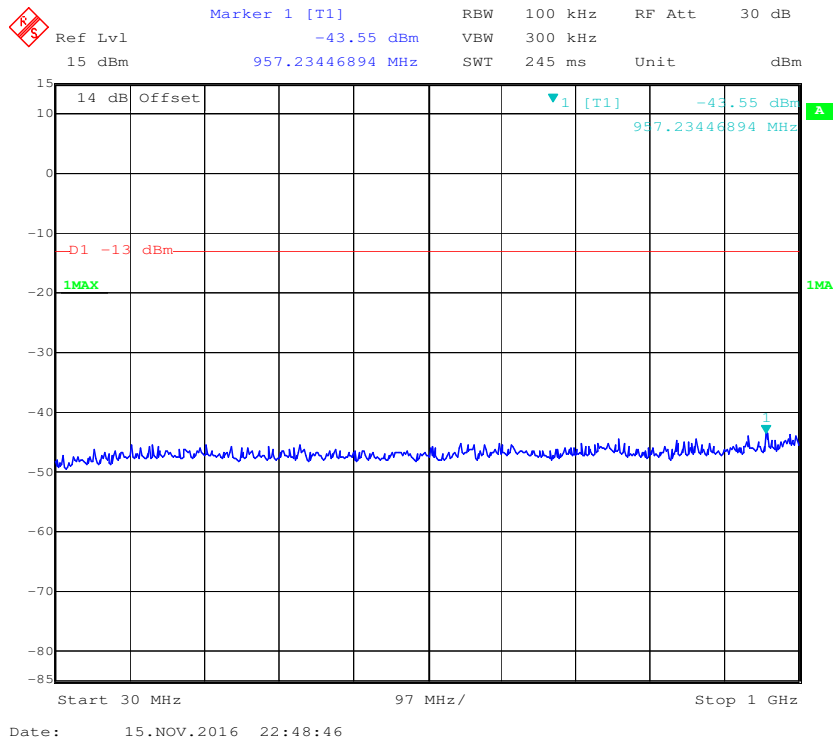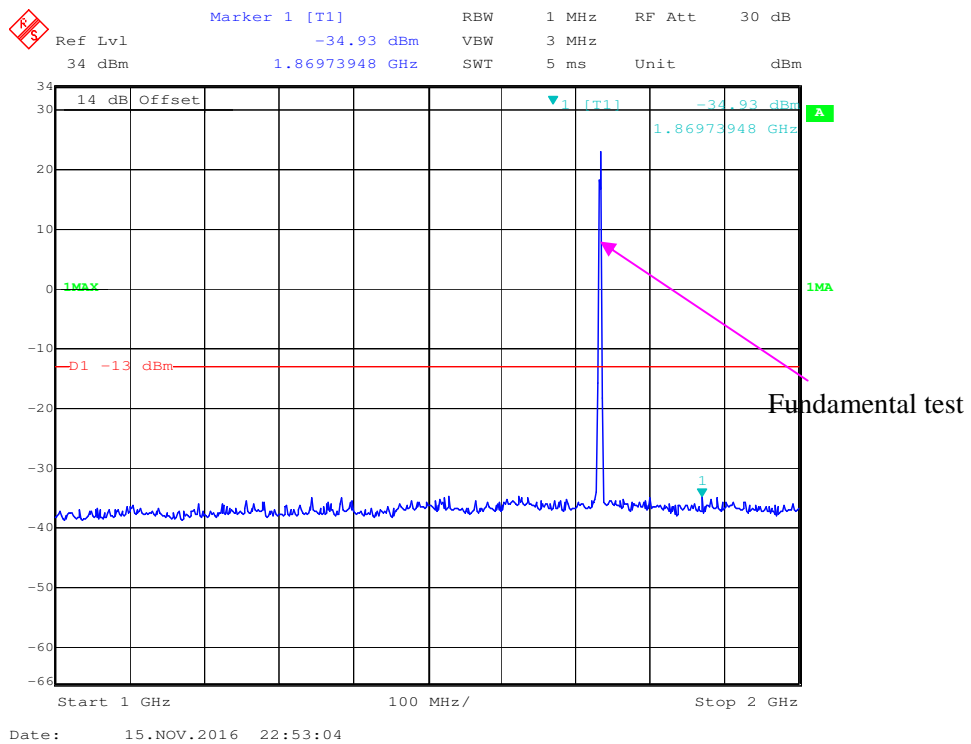LTE Band 4:**30 MHz - 1 GHz (1.4 MHz, Middle Channel)****1 GHz - 2 GHz (1.4 MHz, Middle Channel)**


2 GHz – 20 GHz (1.4 MHz, Middle Channel)

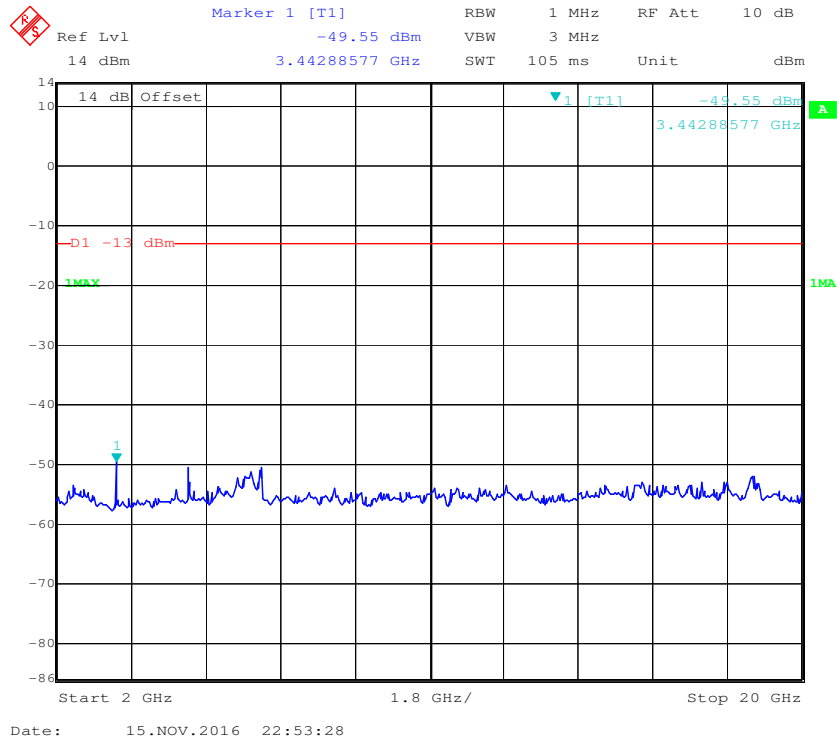


30 MHz - 1 GHz (3.0 MHz, Middle Channel)

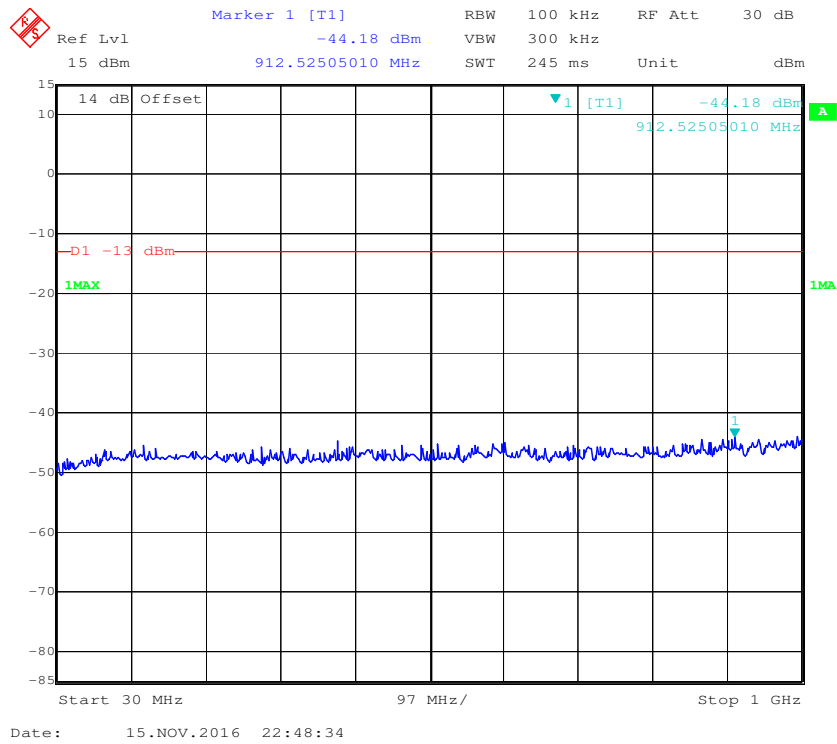


1 GHz – 2 GHz (3.0 MHz, Middle Channel)

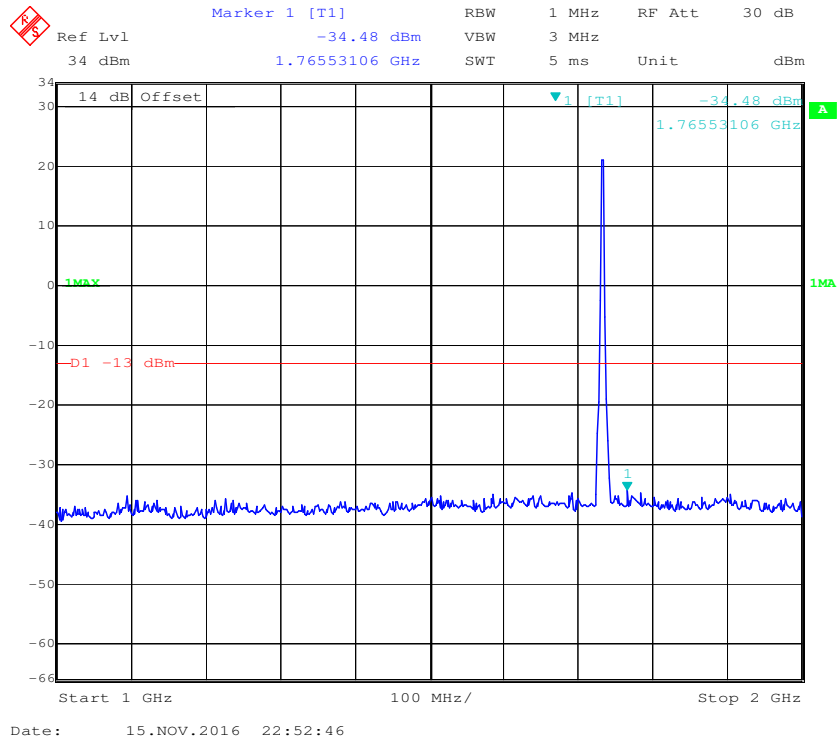


2 GHz – 20 GHz (3.0 MHz, Middle Channel)


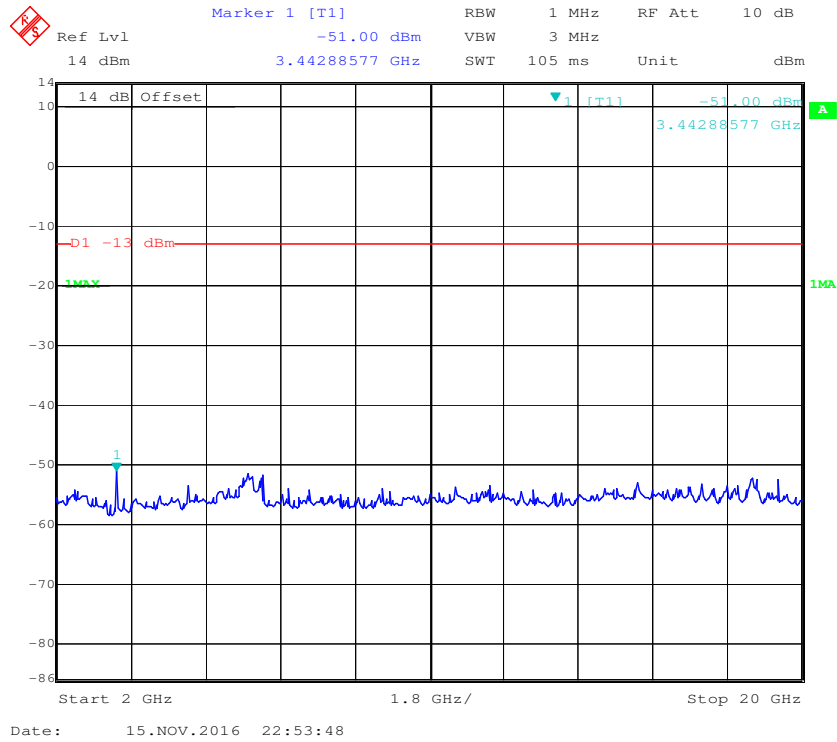


30 MHz - 1 GHz (5.0 MHz, Middle Channel)

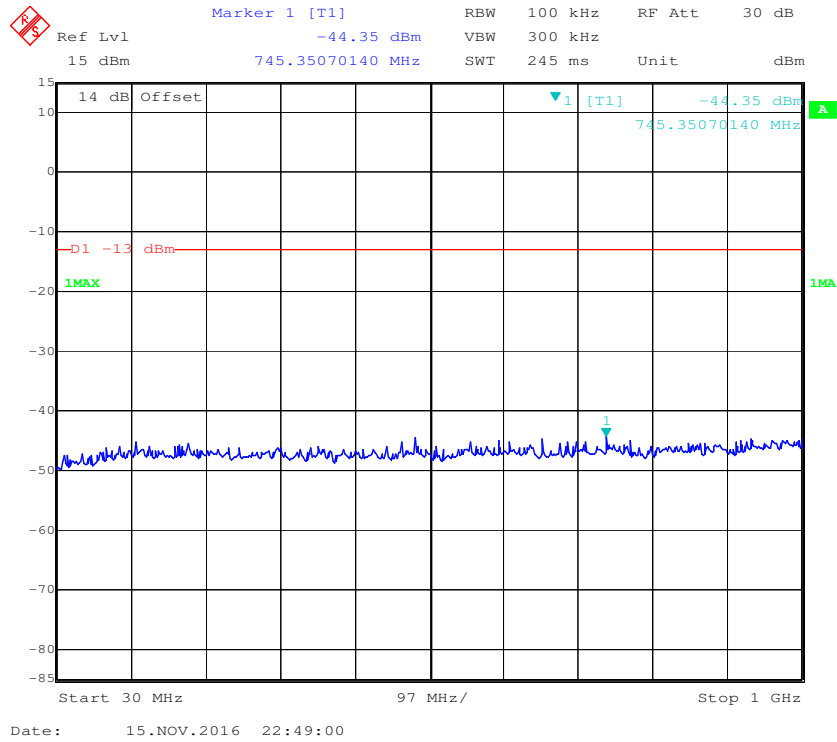


1 GHz - 2 GHz (5.0 MHz, Middle Channel)

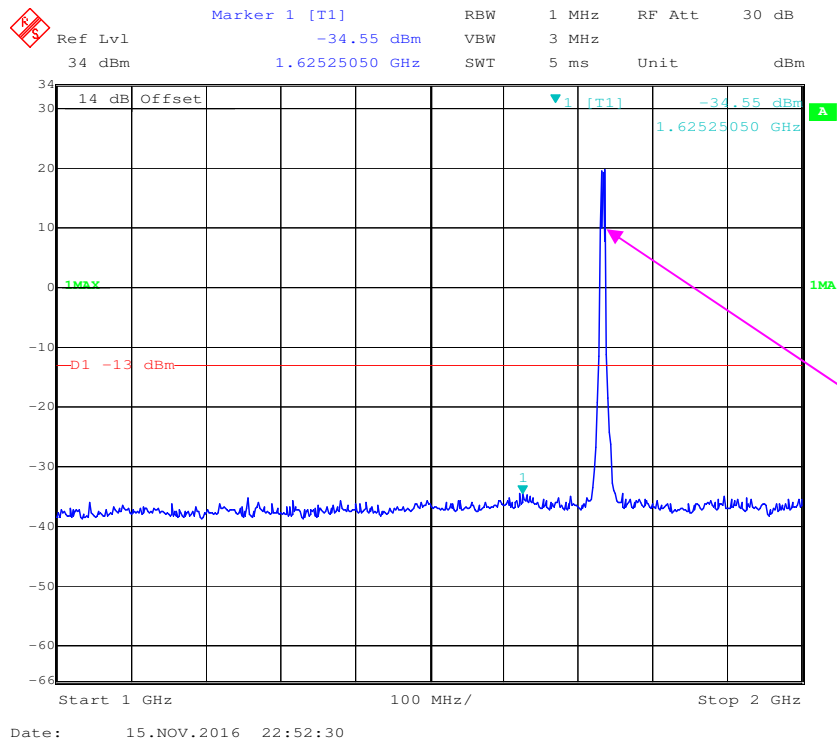


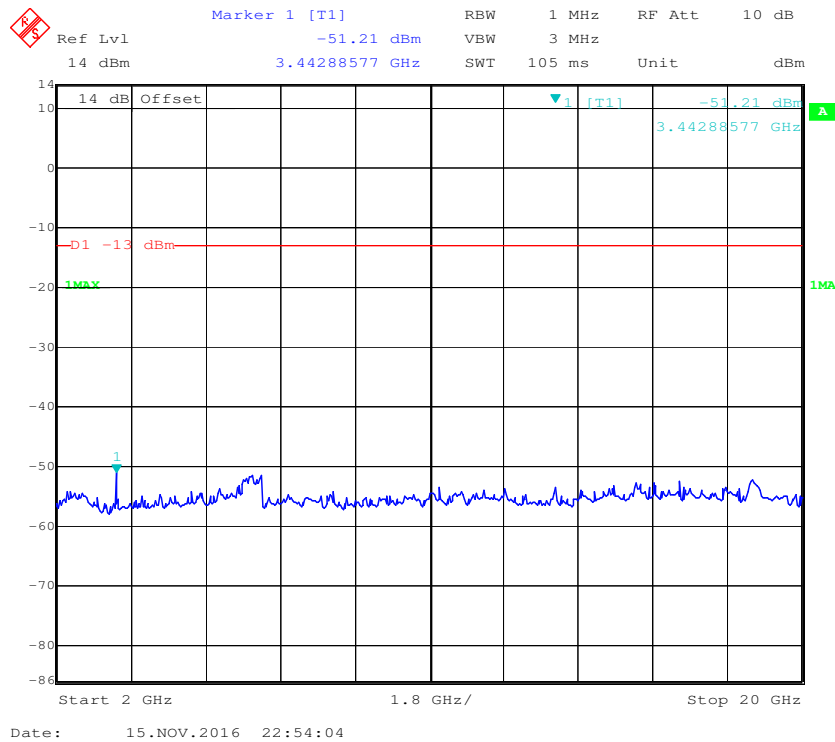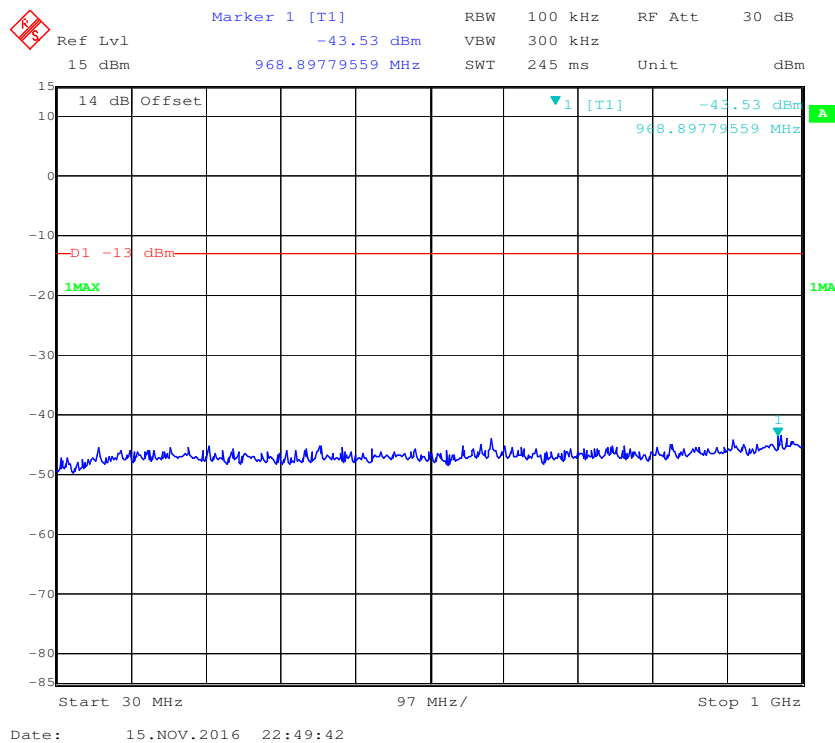2 GHz – 20 GHz (5.0 MHz, Middle Channel)**30 MHz - 1 GHz (10.0 MHz, Middle Channel)**

1 GHz – 2 GHz (10.0 MHz, Middle Channel)

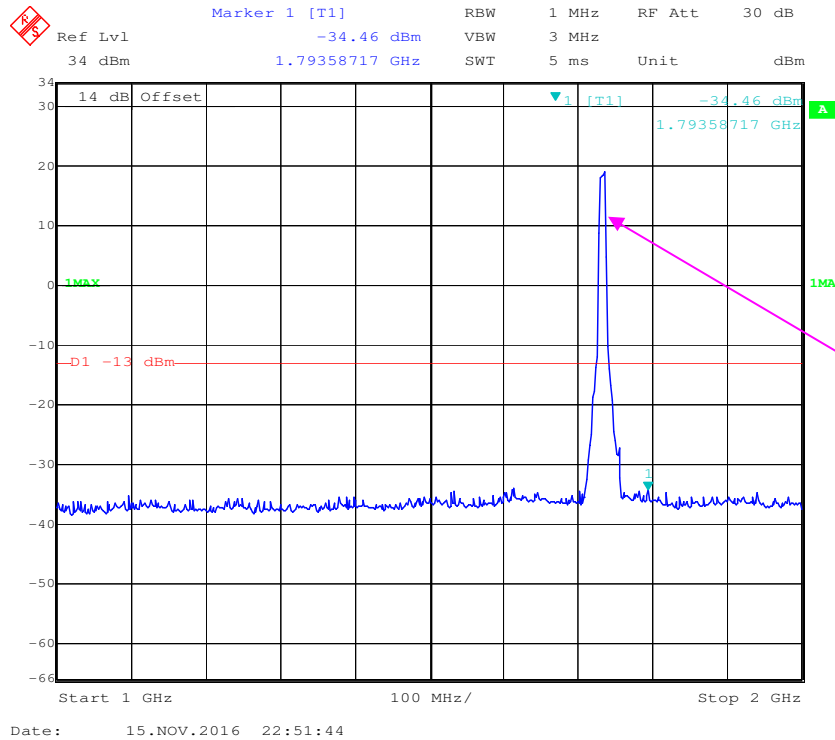

2 GHz – 20 GHz (10.0 MHz, Middle Channel)

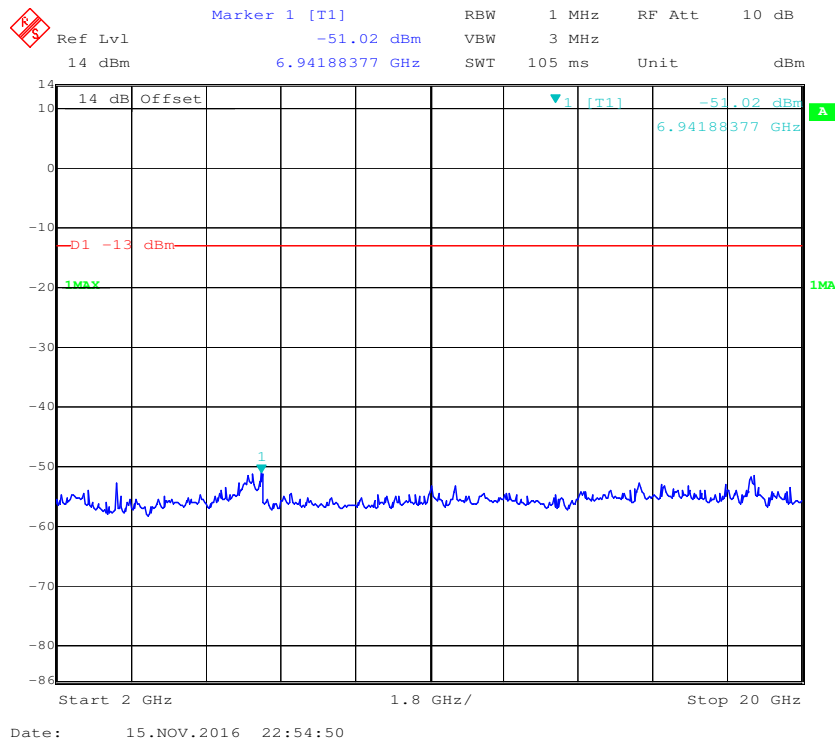

Marker 1 [T1] RBW 100 kHz RF Att 30 dB
 Ref Lvl -44.23 dBm VBW 300 kHz
 15 dBm 957.23446894 MHz SWT 245 ms Unit dBm

14 dB Offset [T1] -44.23 dBm
 957.23446894 MHz

-10 dBm
 1MAX

Start 30 MHz 97 MHz/ Stop 1 GHz

Date: 15.NOV.2016 22:50:01

Ref Lvl 34 dBm
 Marker 1 [T1] -34.03 dBm
 1.90380762 GHz
 RBW 1 MHz
 VBW 3 MHz
 SWT 5 ms
 RF Att 30 dB
 Unit dBm


14 dB Offset
 [T1] -34.03 dBm
 1.90380762 GHz

Start 1 GHz
 100 MHz/
 Stop 2 GHz


Date: 15.NOV.2016 22:51:20

Fundamental test


2 GHz –20 GHz (15.0 MHz, Middle Channel)

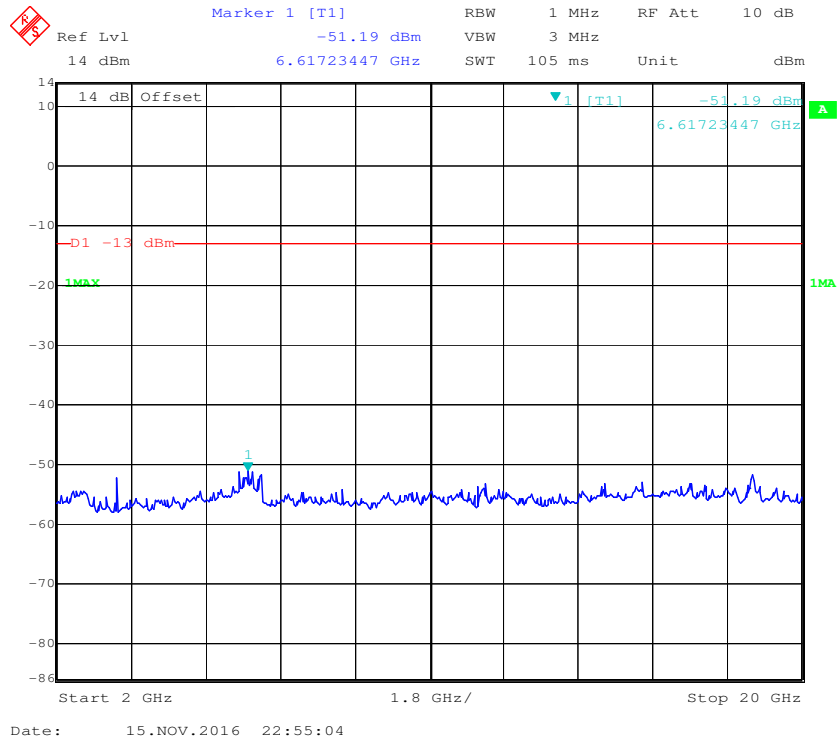


30 MHz - 1 GHz (20.0 MHz, Middle Channel)

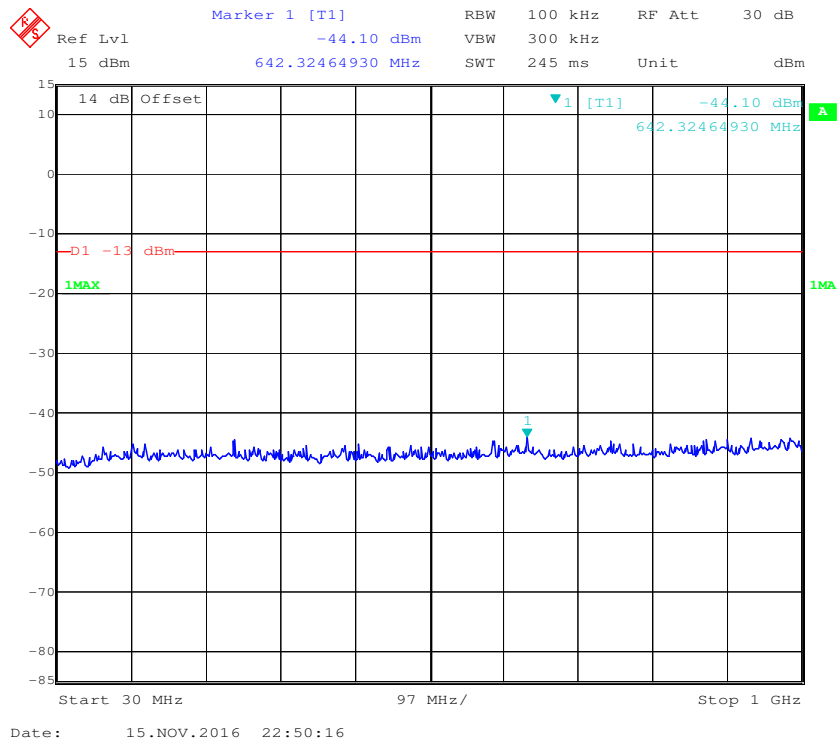

1 GHz –2 GHz (20.0 MHz, Middle Channel)

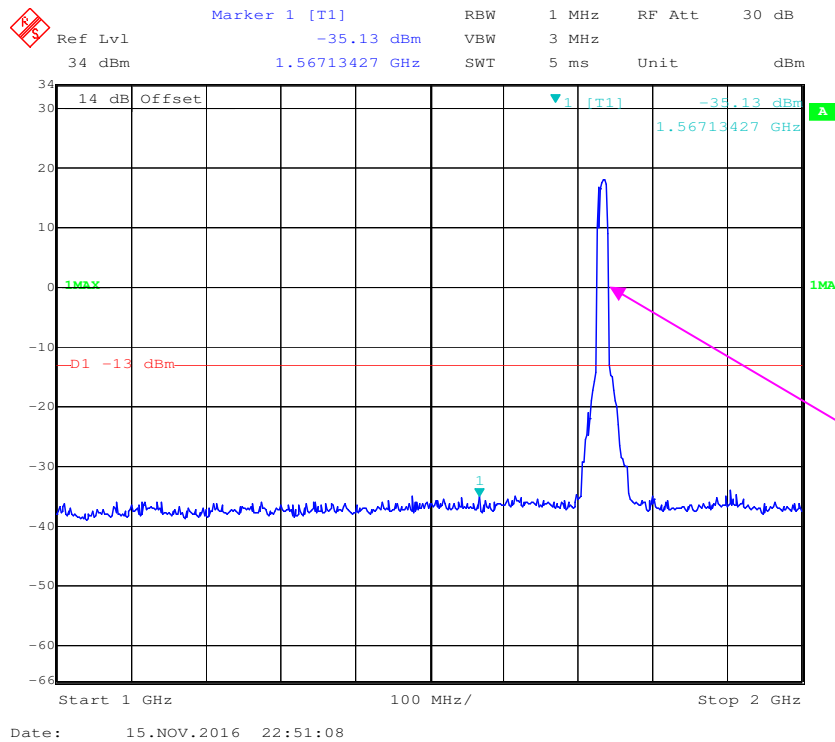


2 GHz –20 GHz (20.0 MHz, Middle Channel)

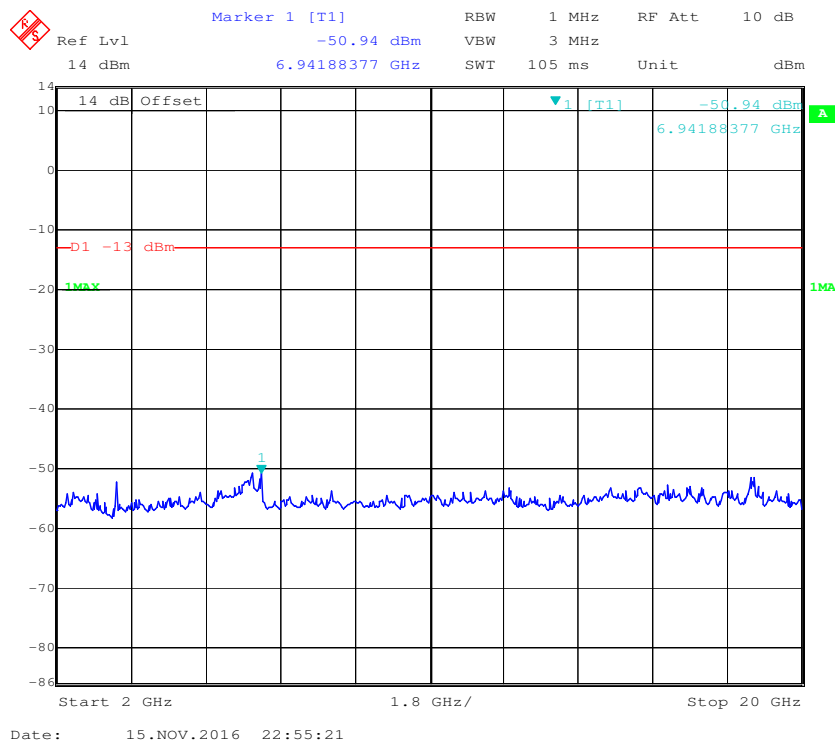


LTE Band 7:

30 MHz - 1 GHz (5.0 MHz, Middle Channel)

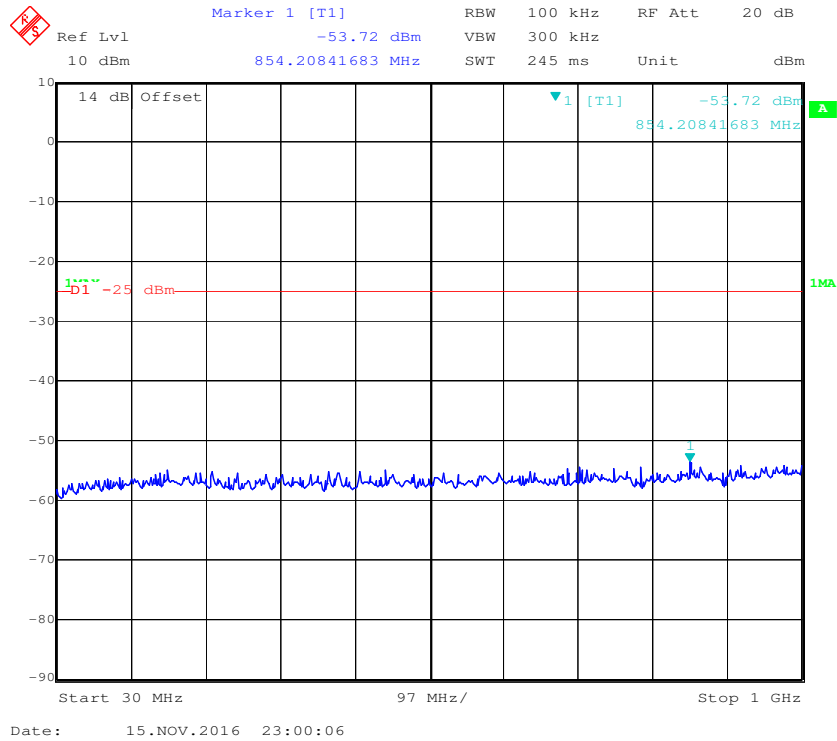


1 GHz - 3 GHz (5.0 MHz, Middle Channel)

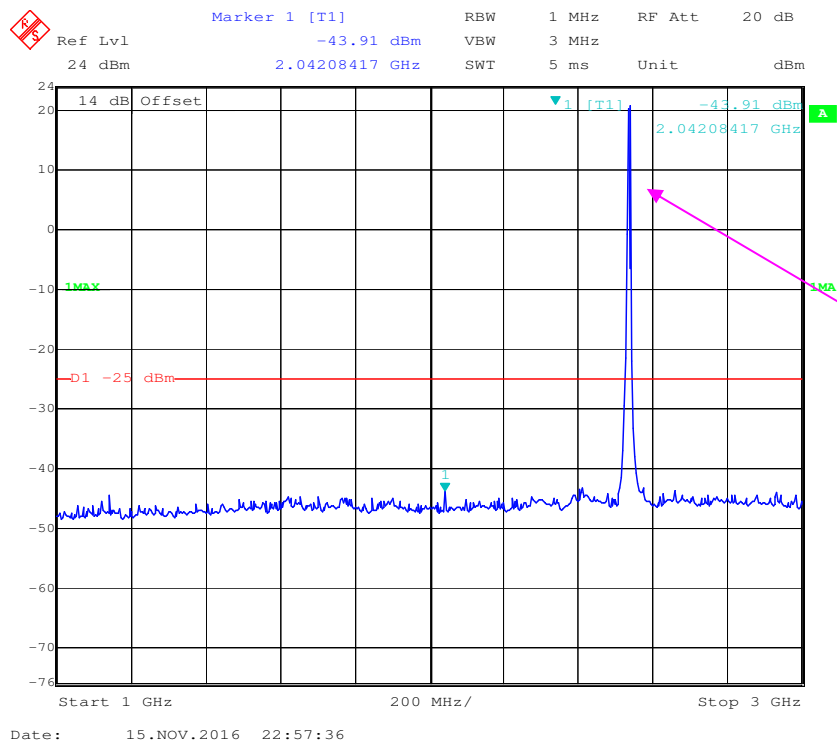


Fundamental test


3 GHz – 26 GHz (5.0 MHz, Middle Channel)

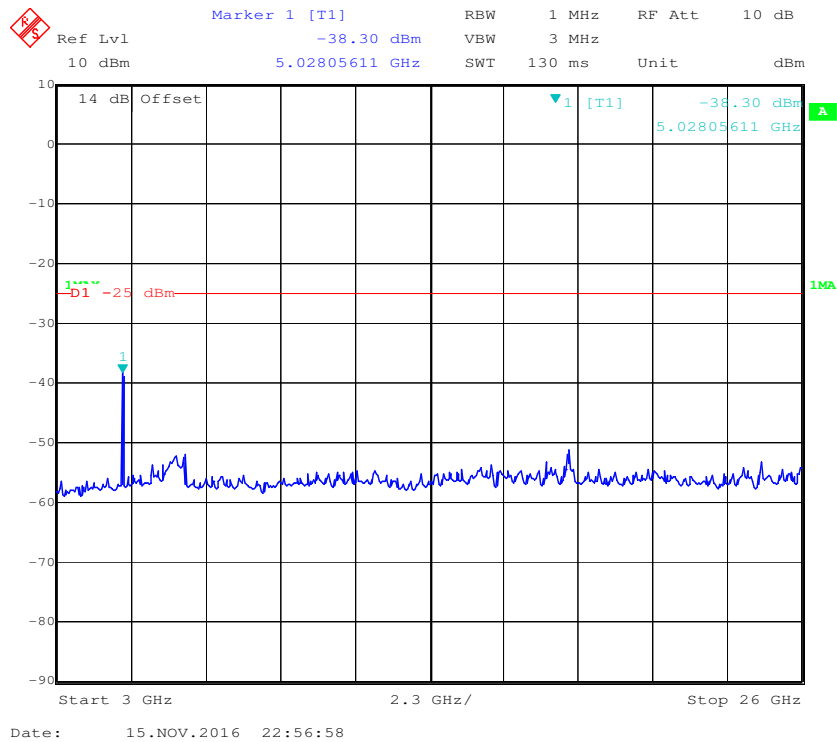


30 MHz - 1 GHz (10.0 MHz, Middle Channel)

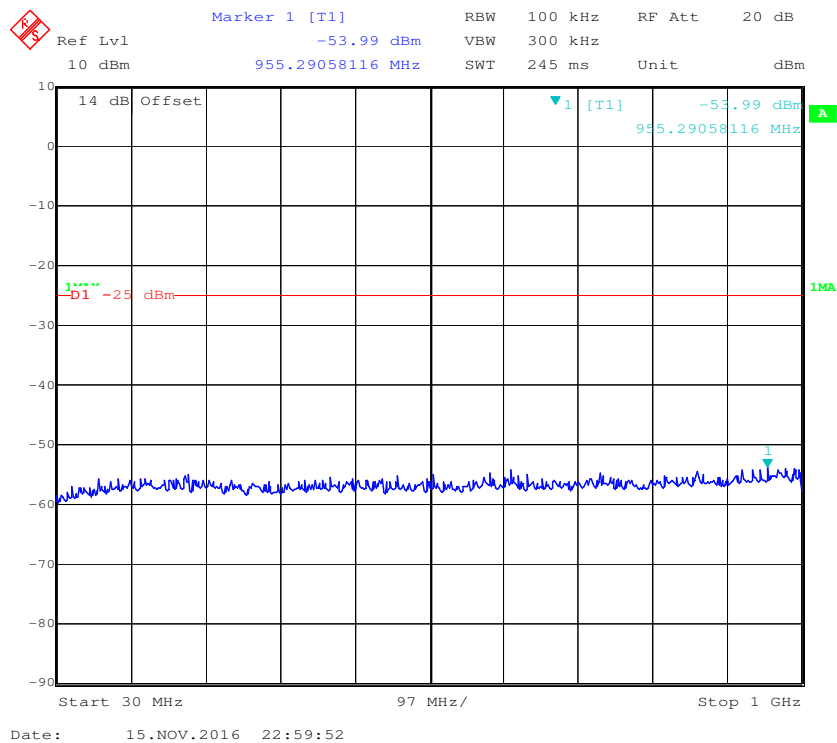


1 GHz – 3 GHz (10.0 MHz, Middle Channel)

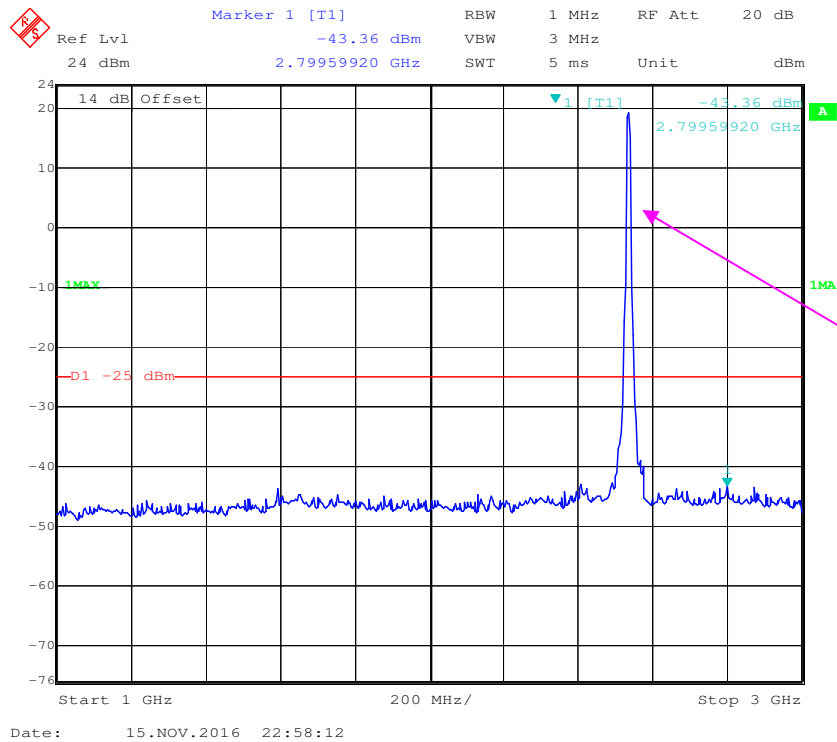


3 GHz – 26 GHz (10.0 MHz, Middle Channel)

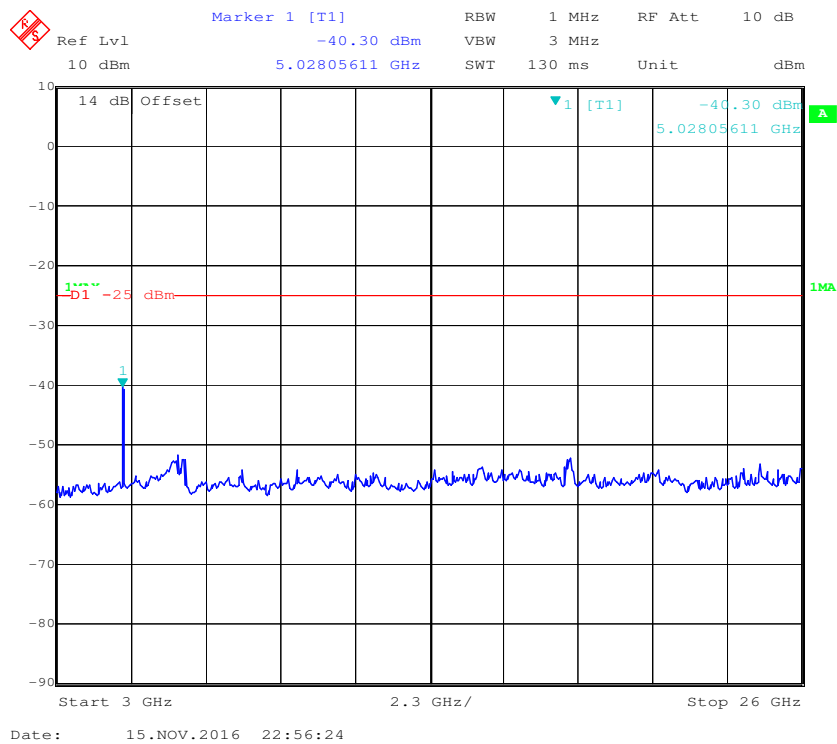


30 MHz - 1 GHz (15.0 MHz, Middle Channel)

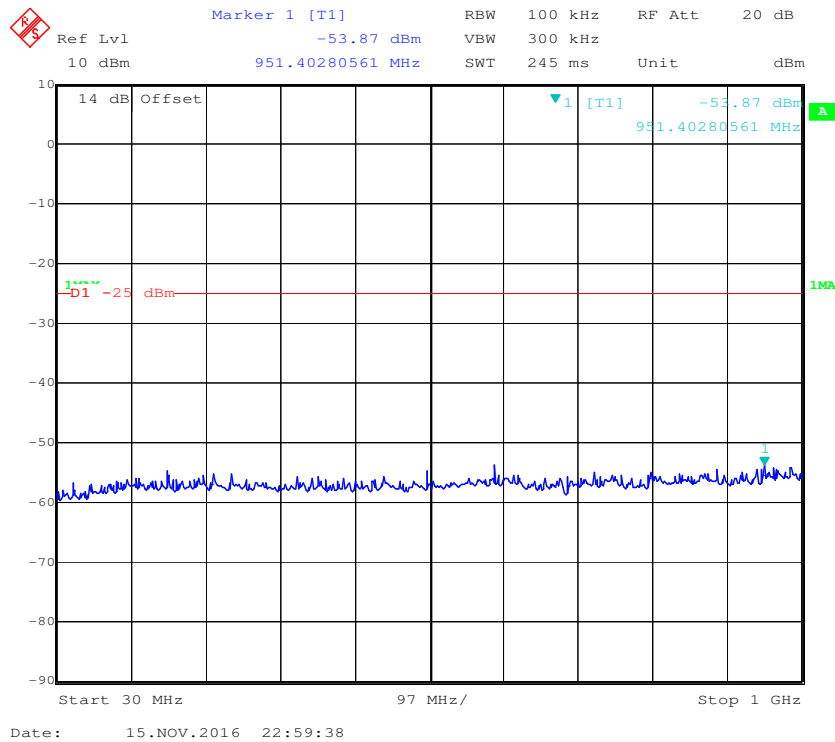


1 GHz – 3 GHz (15.0 MHz, Middle Channel)

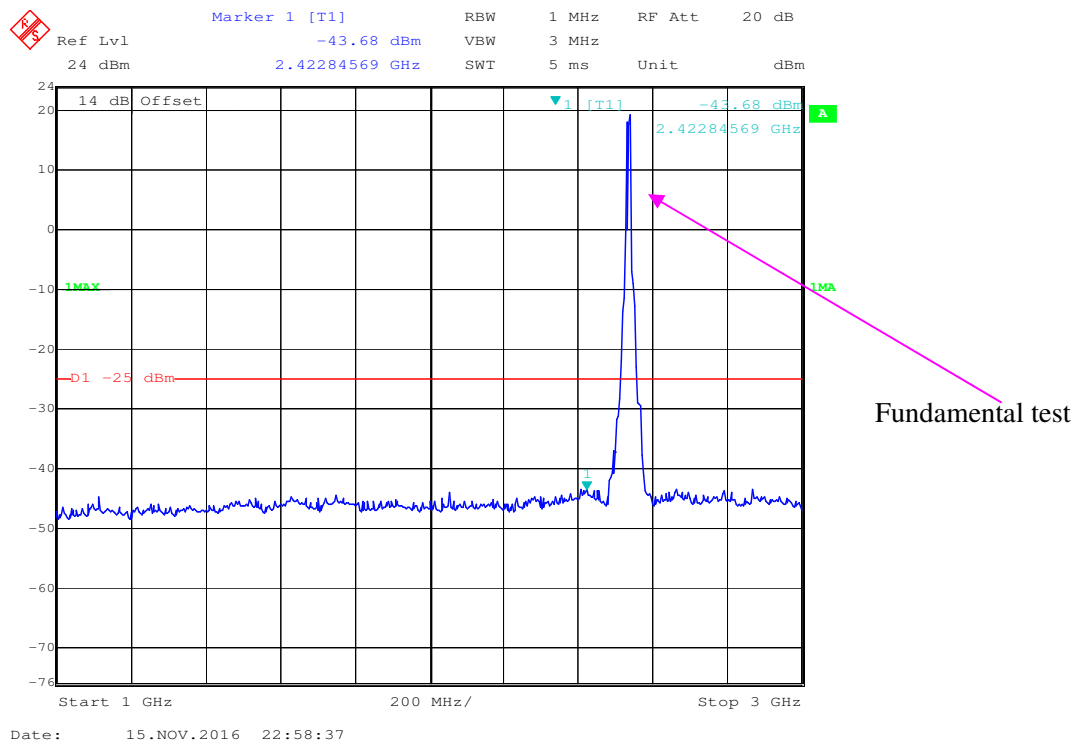


3 GHz –26 GHz (15.0 MHz, Middle Channel)

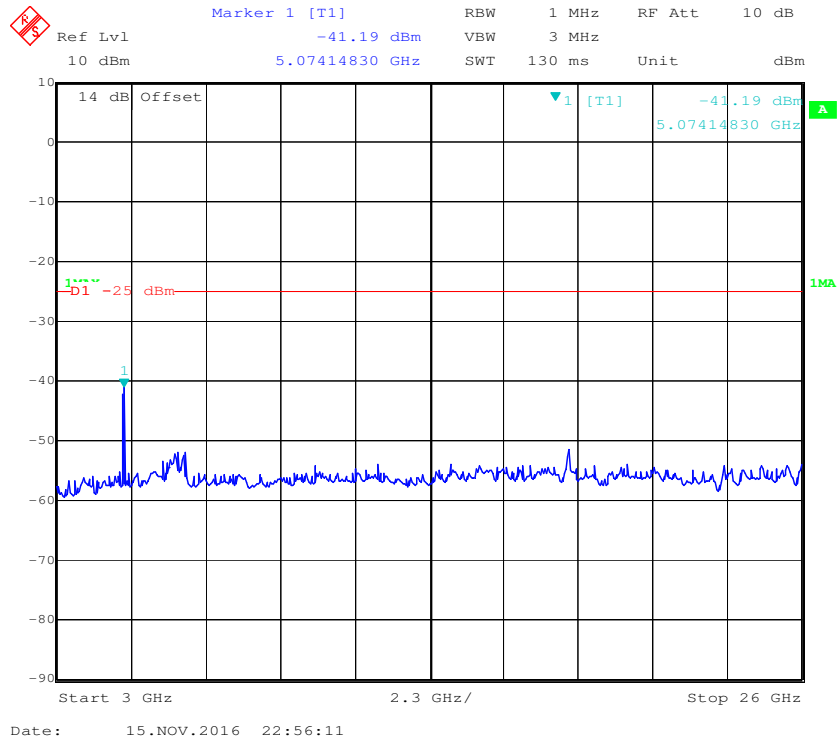


30 MHz - 1 GHz (20.0 MHz, Middle Channel)

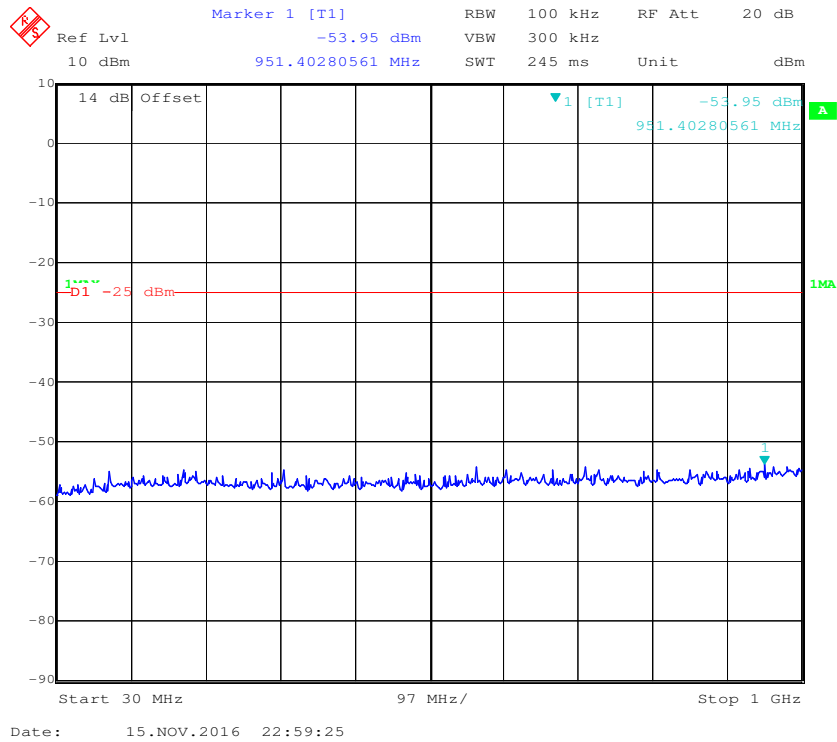

1 GHz –3 GHz (20.0 MHz, Middle Channel)

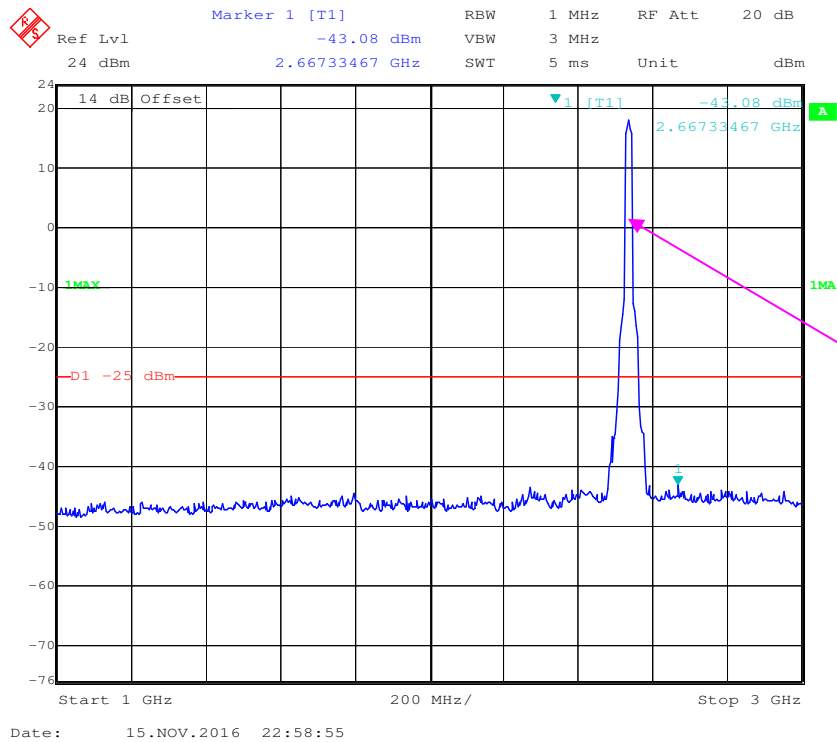


3 GHz –26 GHz (20.0 MHz, Middle Channel)

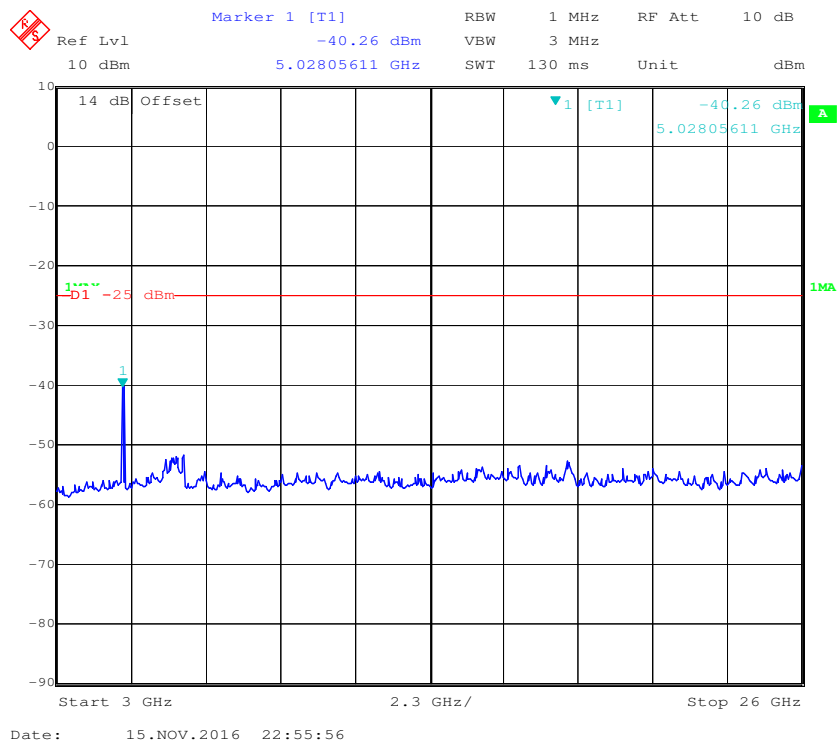


LTE Band 17:


30 MHz – 1 GHz (5.0 MHz, Middle Channel)

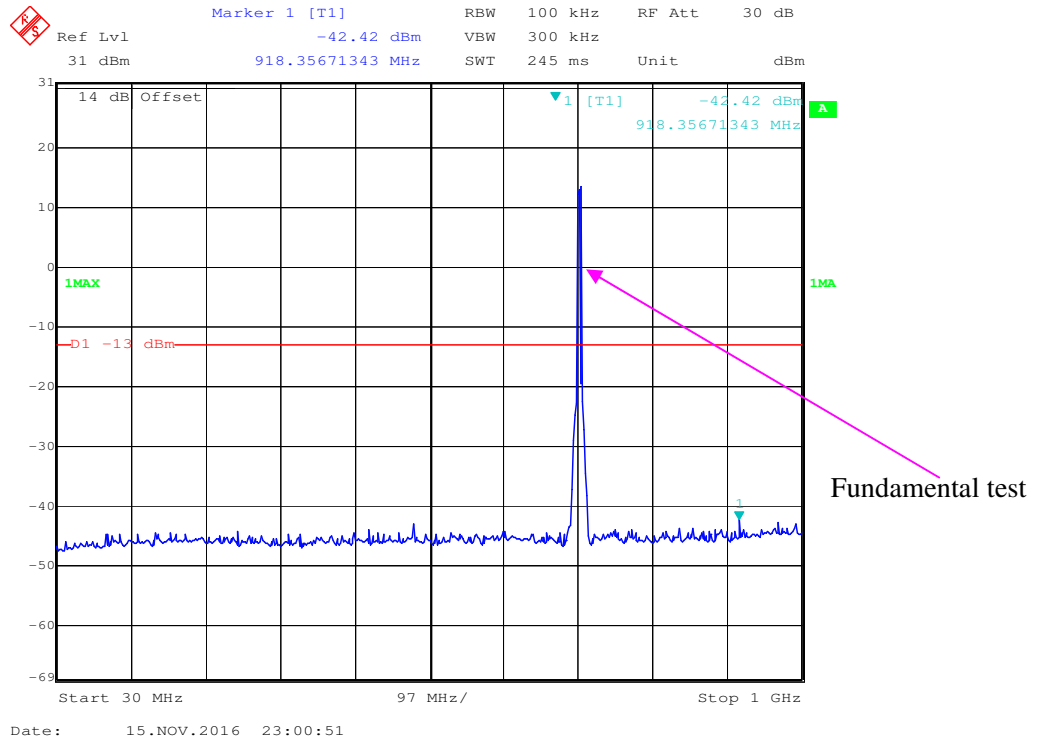


1 GHz – 10 GHz (5.0 MHz, Middle Channel)

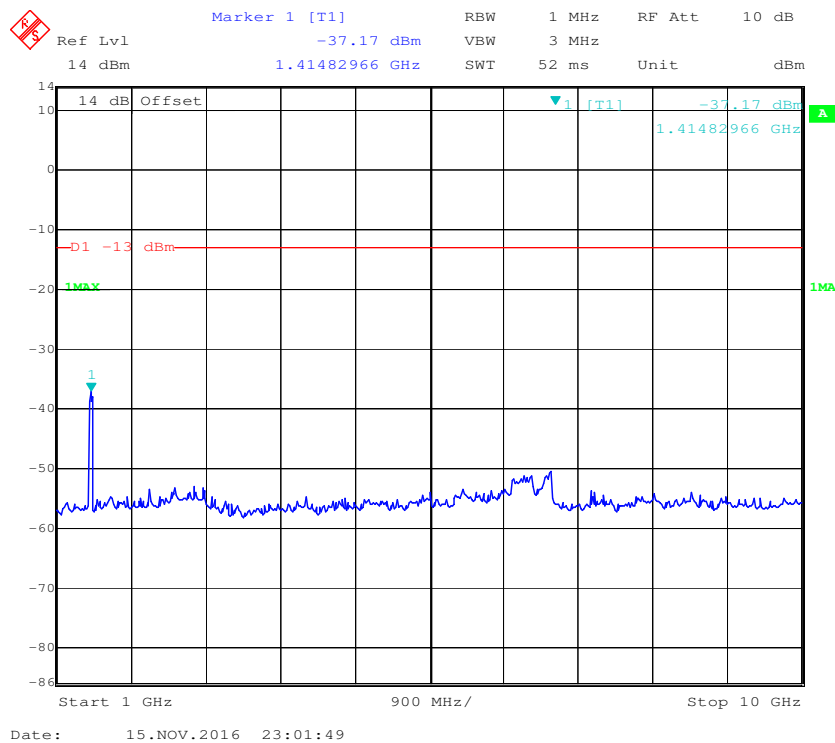

30 MHz –1 GHz (10.0 MHz, Middle Channel)

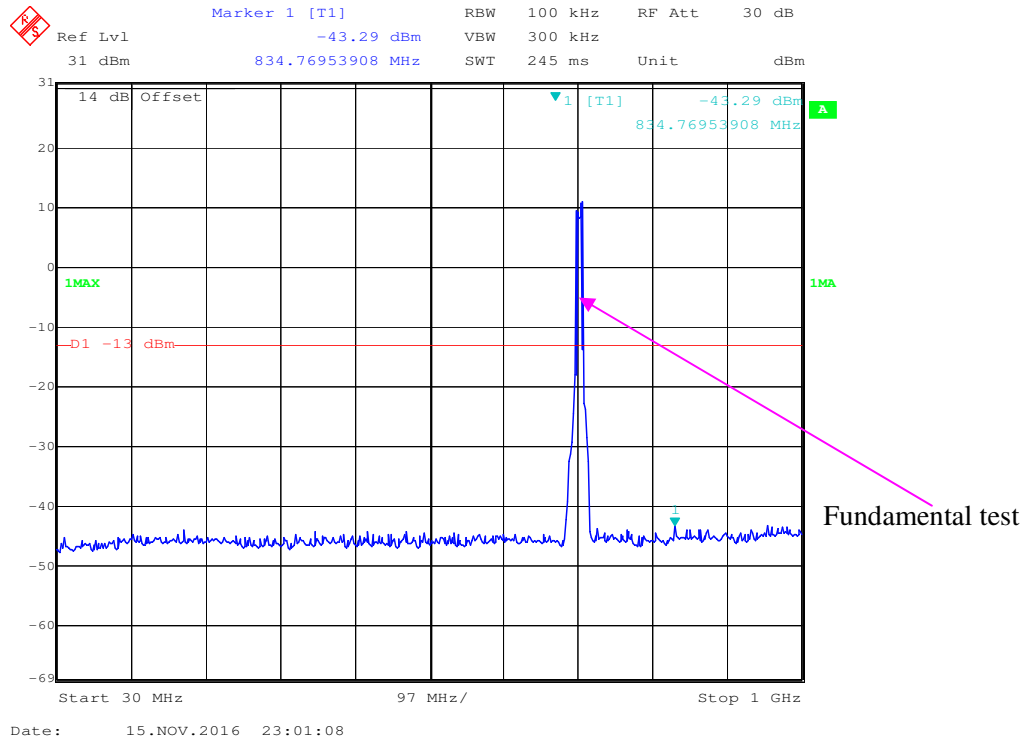

1 GHz – 10 GHz (10.0 MHz, Middle Channel)

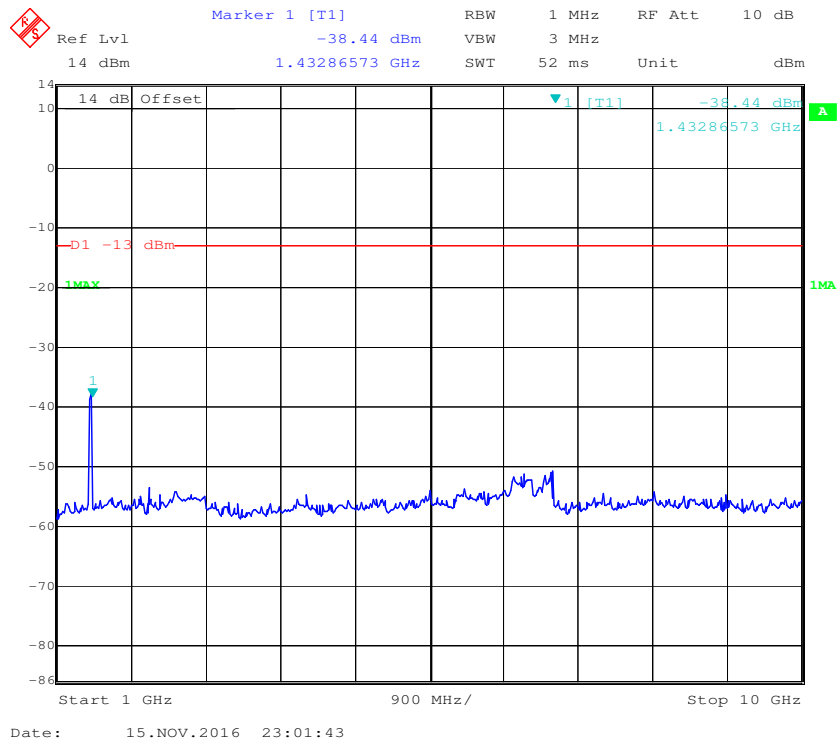

FCC § 2.1053; § 22.917 (a); § 24.238 (a); §27.53 (h) (m) SPURIOUS RADIATED EMISSIONS

Applicable Standards

FCC § 2.1053, §22.917(a) and § 24.238(a) and § 27.53(h)(m)

For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

Test Procedure

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to tenth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in dB = $10 \lg (\text{TX pwr in Watts}/0.001)$ – the absolute level

Spurious attenuation limit in dB = $43 + 10 \log_{10} (\text{power out in Watts})$

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	55 %
ATM Pressure:	101.0 kPa

The testing was performed by Layne Li on 2016-11-15.

Test mode: Transmitting

Test mode: Transmitting (Pre-scan with Low, Middle, High channel, and the worse case data as below)

30 MHz ~ 10 GHz:

Cellular Band (Part 22H)

Frequency (MHz)	Receiver Reading (dBμV)	Turntable Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)			
GSM 850 Mode										
165.7	30.43	145	2.4	H	-66.6	0.28	0	-66.88	-13	53.88
165.7	33.05	175	1.9	V	-63.9	0.28	0	-64.18	-13	51.18
1673.20	67.23	266	2.1	H	-36.7	0.30	9.40	-27.60	-13	14.60
1673.20	61.72	284	1.3	V	-43.7	0.30	9.40	-34.60	-13	21.60
WCDMA 850 Mode										
165.7	30.33	48	2.1	H	-66.7	0.28	0	-66.98	-13	53.98
165.7	33.17	263	1.3	V	-63.8	0.28	0	-64.08	-13	51.08
1673.20	71.33	320	1.1	H	-32.6	0.30	9.40	-23.50	-13	10.50
1673.20	68.42	76	1.3	V	-37.0	0.30	9.40	-27.90	-13	14.90

30 MHz ~ 20 GHz:

PCS Band (Part 24E)

Frequency (MHz)	Receiver Reading (dBμV)	Turntable Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)			
GSM 1900 Mode										
165.7	31.11	45	2.3	H	-65.9	0.28	0	-66.18	-13	53.18
165.7	33.39	22	2.2	V	-63.6	0.28	0	-63.88	-13	50.88
3760.00	59.03	320	1.6	H	-34.7	2.42	12.60	-24.52	-13	11.52
3760.00	58.53	272	2.0	V	-34.2	2.42	12.60	-24.02	-13	11.02
WCDMA 1900 Mode										
165.7	31.19	39	2.2	H	-65.8	0.28	0	-66.08	-13	53.08
165.7	32.19	131	1.4	V	-64.8	0.28	0	-65.08	-13	52.08
3760.00	43.33	191	1.2	H	-50.4	2.42	12.60	-40.22	-13	27.22
3760.00	42.03	227	2.1	V	-50.7	2.42	12.60	-40.52	-13	27.52

Test mode: Transmitting (Pre-scan with all the bandwidth, and worse case as below)

Frequency	Receiver	Turntable	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
(MHz)	Reading (dBμV)	Angle Degree	Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)			
Band 4										
Test frequency range:30 MHz ~ 18 GHz										
165.7	32.52	228	1.3	H	-64.5	0.28	0	-64.78	-13	51.78
165.7	31.45	177	1.3	V	-65.6	0.28	0	-65.88	-13	52.88
3465.00	41.27	160	1.3	H	-53.3	2.34	12.40	-43.24	-13	30.24
3465.00	40.01	279	1.4	V	-52.5	2.34	12.40	-42.44	-13	29.44
Band 7										
Test frequency range:30 MHz ~ 26 GHz										
165.7	31.8	7	1.2	H	-65.2	0.28	0	-65.48	-25	40.48
165.7	31.33	122	1.8	V	-65.7	0.28	0	-65.98	-25	40.98
5070.00	39.16	193	1.7	H	-49.5	2.57	12.70	-39.37	-25	14.37
5070.00	39.87	8	1.6	V	-49.6	2.57	12.70	-39.47	-25	14.47
Band 17										
Test frequency range:30 MHz ~10 GHz										
165.7	31.86	57	1.9	H	-65.1	0.28	0	-65.38	-13	52.38
165.7	32.29	76	1.6	V	-64.7	0.28	0	-64.98	-13	51.98
1420.00	59.76	305	2.4	H	-43.0	0.28	8.00	-35.28	-13	22.28
1420.00	62.92	69	2.3	V	-43.9	0.28	8.00	-36.18	-13	23.18

Note:

- 1) Absolute Level = SG Level - Cable loss + Antenna Gain
- 2) Margin = Limit- Absolute Level

FCC § 22.917 (a); § 24.238 (a); § 27.53 (h)(m) - BAND EDGES

Applicable Standards

According to § 22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

According to § 24.238(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.


According to FCC § 27.53 (h)(m), the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log(P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log(P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log(P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log(P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log(P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

Test Procedure

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

The center of the spectrum analyzer was set to block edge frequency

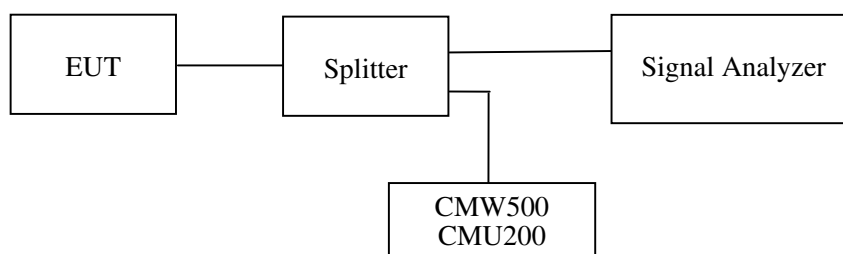

Test Data

Environmental Conditions


Temperature:	20~25°C
Relative Humidity:	50~55 %
ATM Pressure:	100.0~101.0 kPa

The testing was performed by Bin Mei on 2016-11-14 and 2016-11-15.


EUT operation mode: Transmitting

Test Result: Compliance. Please refer to the following plots.


Cellular Band, Left Band Edge for GSM (GMSK) Mode

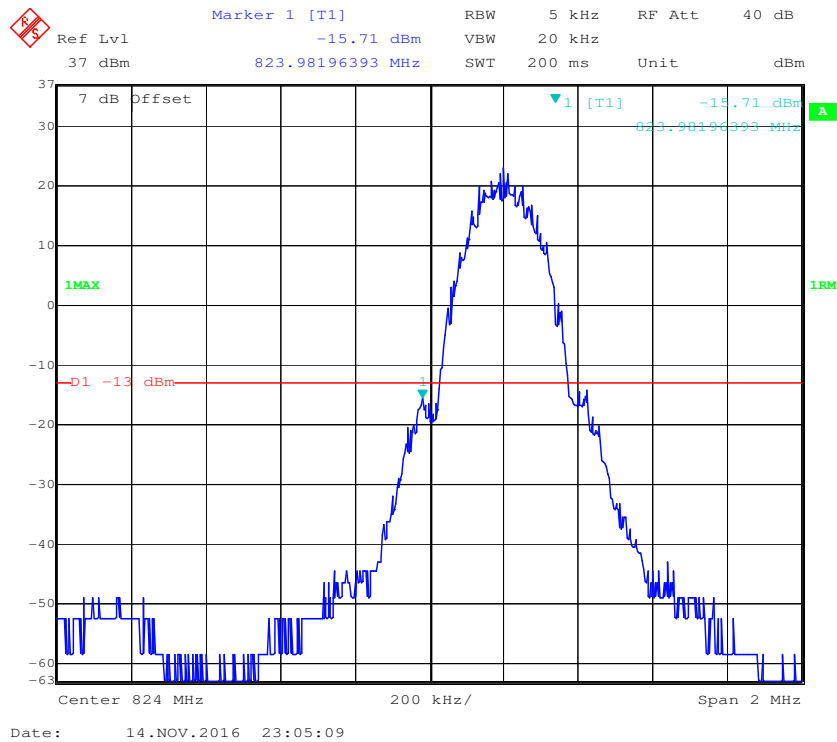


Cellular Band, Right Band Edge for GSM (GMSK) Mode

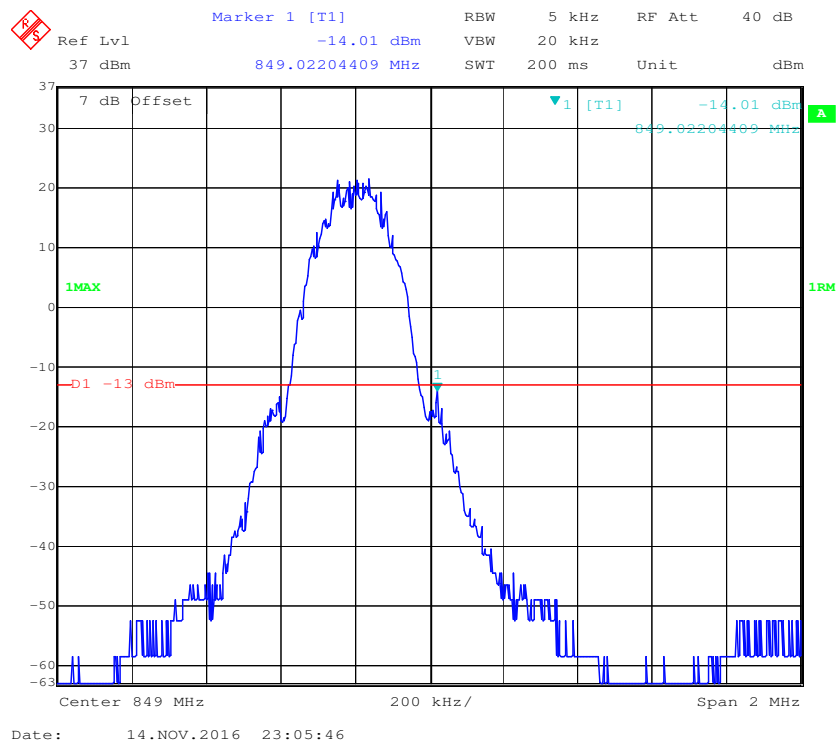


Cellular Band, Left Band Edge for EGPRS (8PSK) Mode

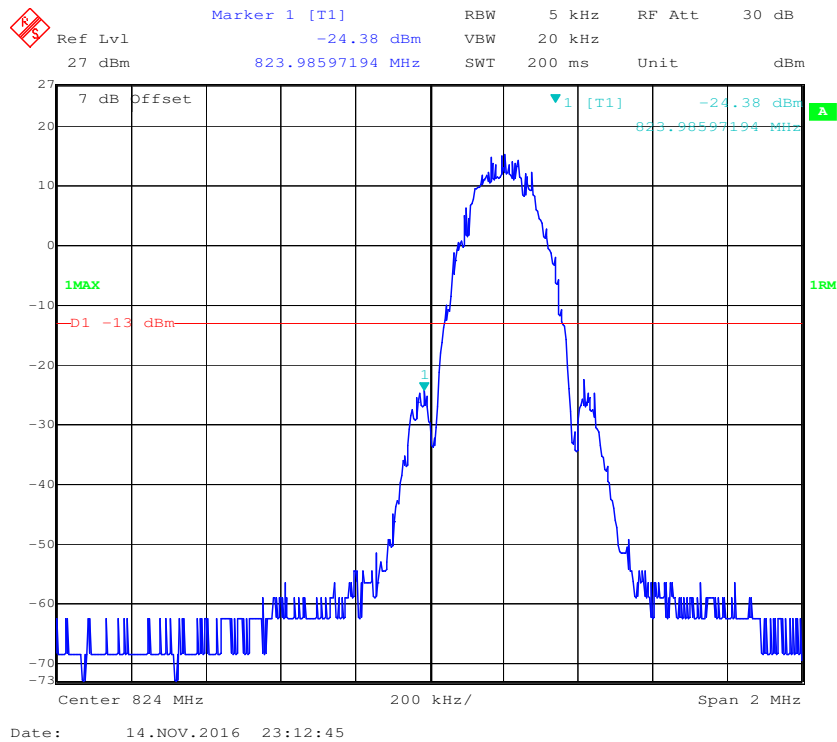


Cellular Band, Right Band Edge for EGPRS (8PSK) Mode


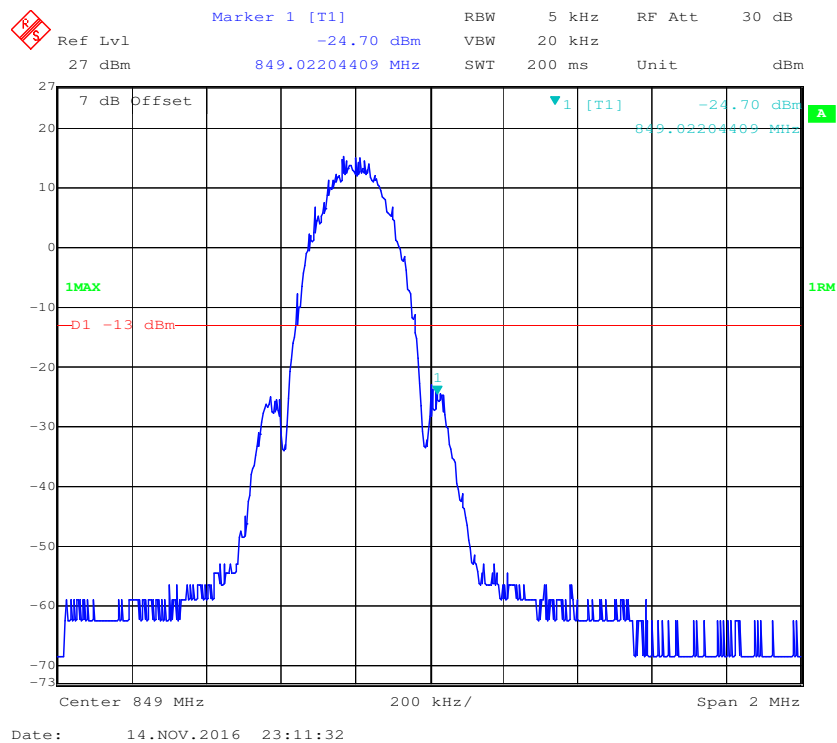




Cellular Band, Left Band Edge for RMC (BPSK) Mode

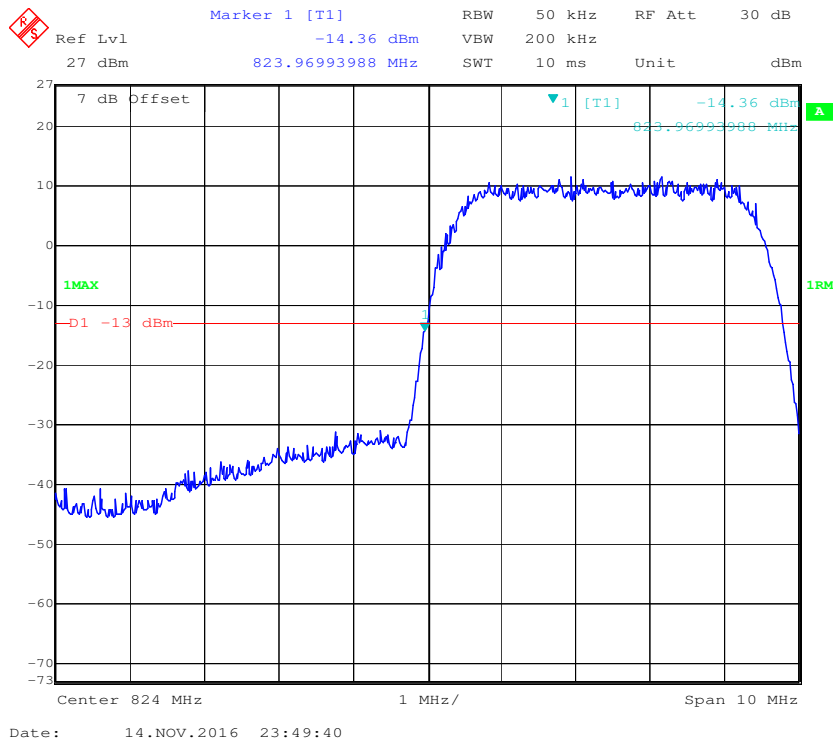


Cellular Band, Right Band Edge for RMC (BPSK) Mode

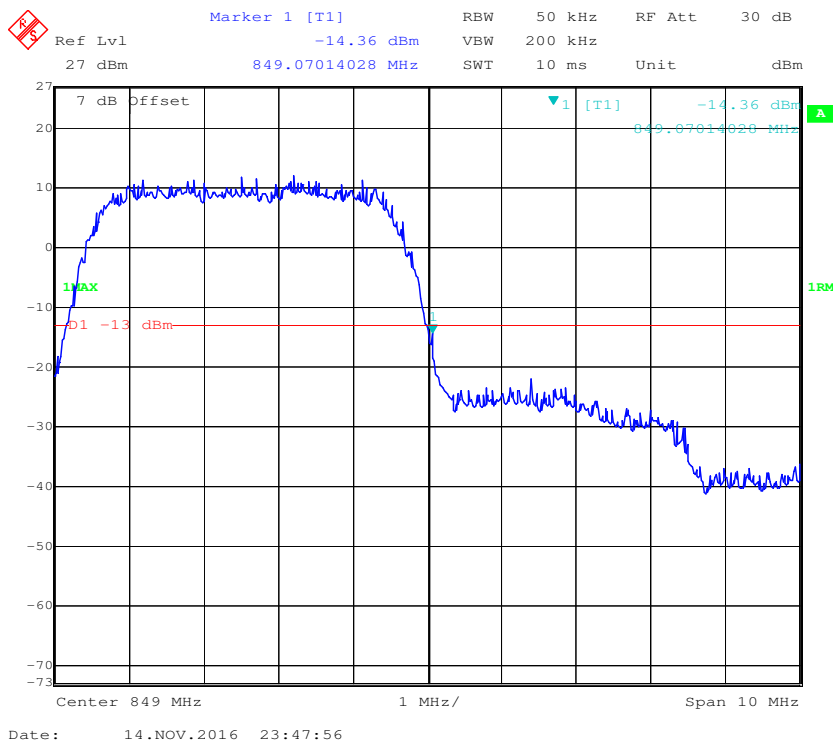

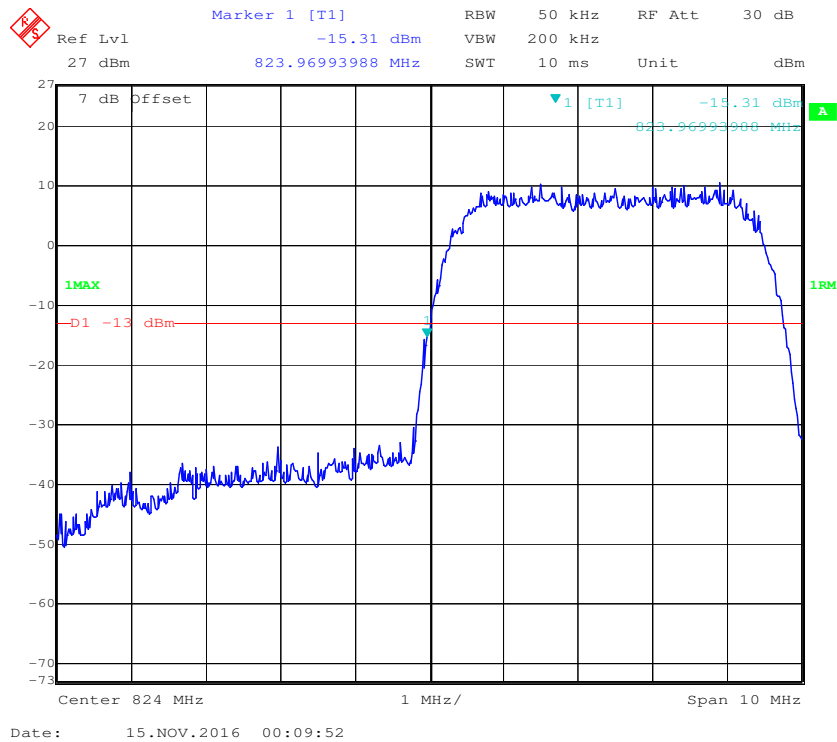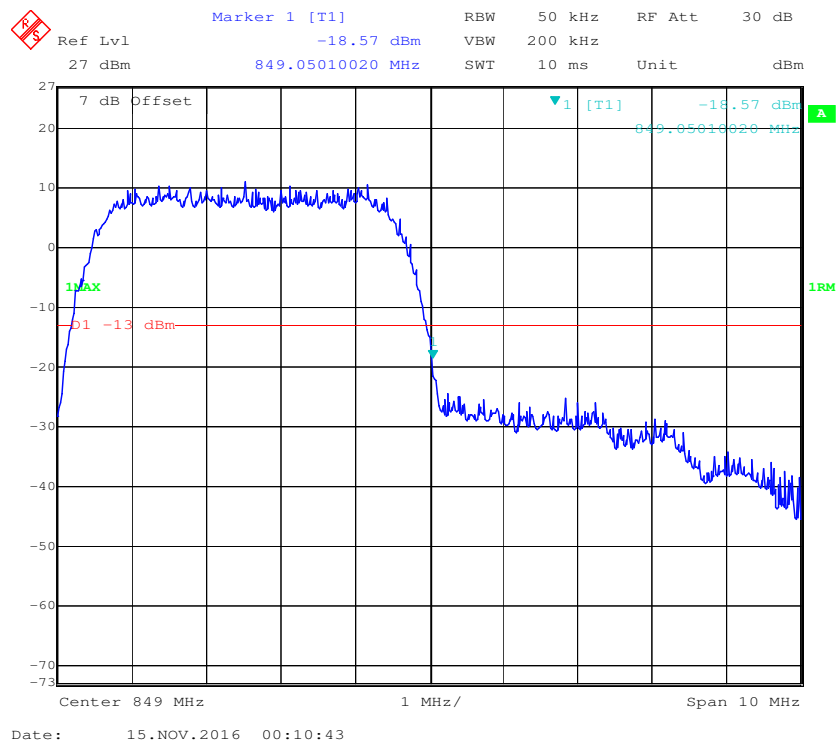
Cellular Band, Left Band Edge for HSDPA (16QAM) Mode**Cellular Band, Right Band Edge for HSDPA (16QAM) Mode**

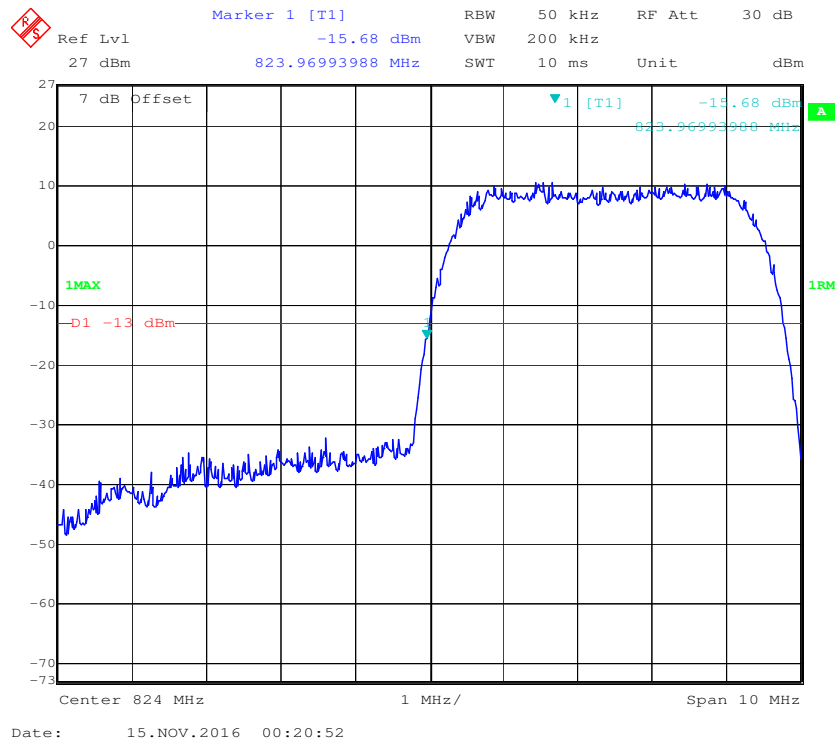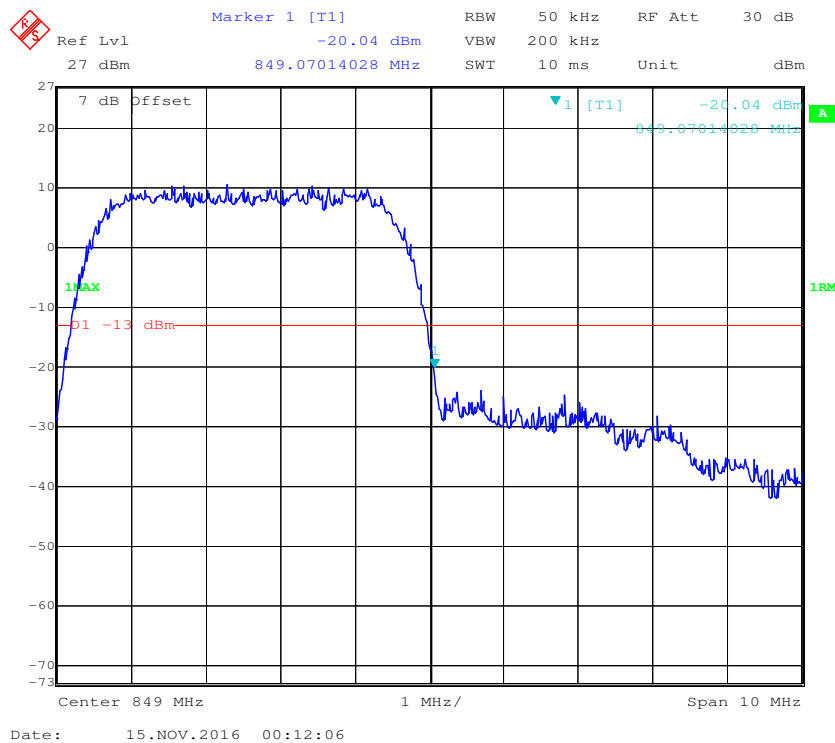Cellular Band, Left Band Edge for HSUPA (BPSK) Mode**Cellular Band, Right Band Edge for HSUPA (BPSK) Mode**


PCS Band, Left Band Edge for GSM (GMSK) Mode

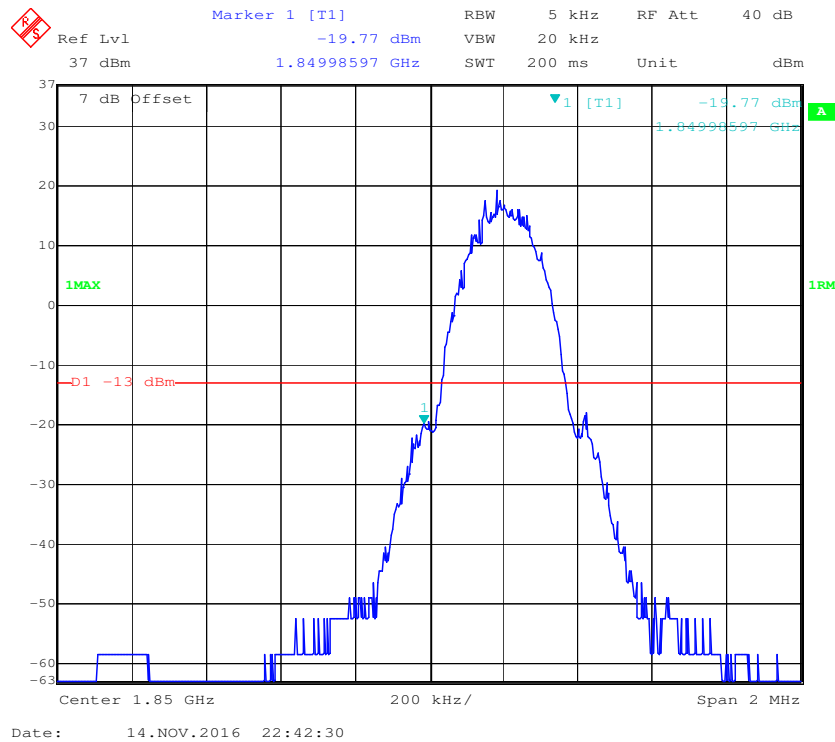


PCS Band, Right Band Edge for GSM (GMSK) Mode

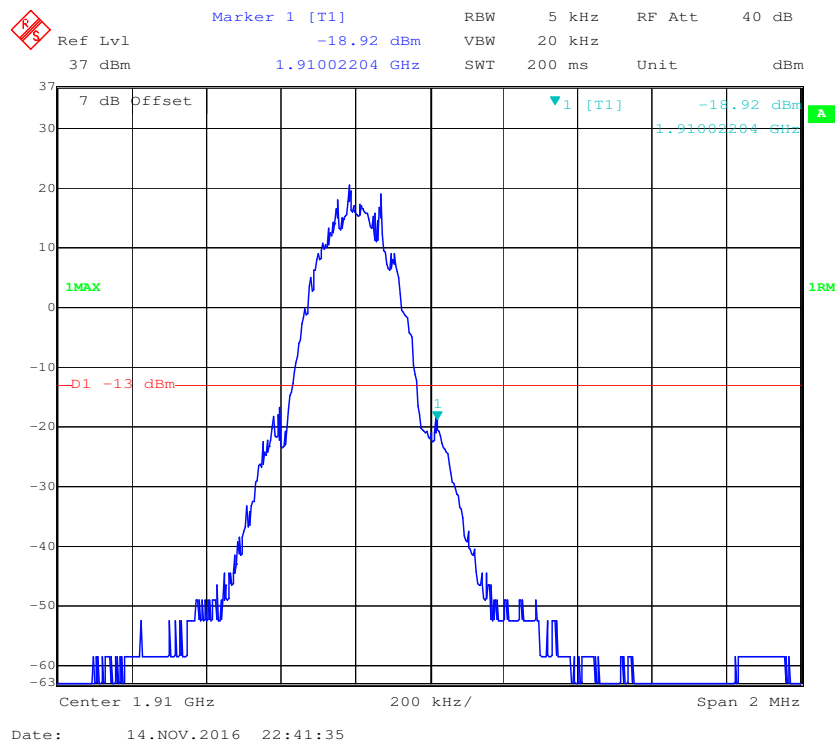


PCS Band, Left Band Edge for EGPRS (8PSK) Mode

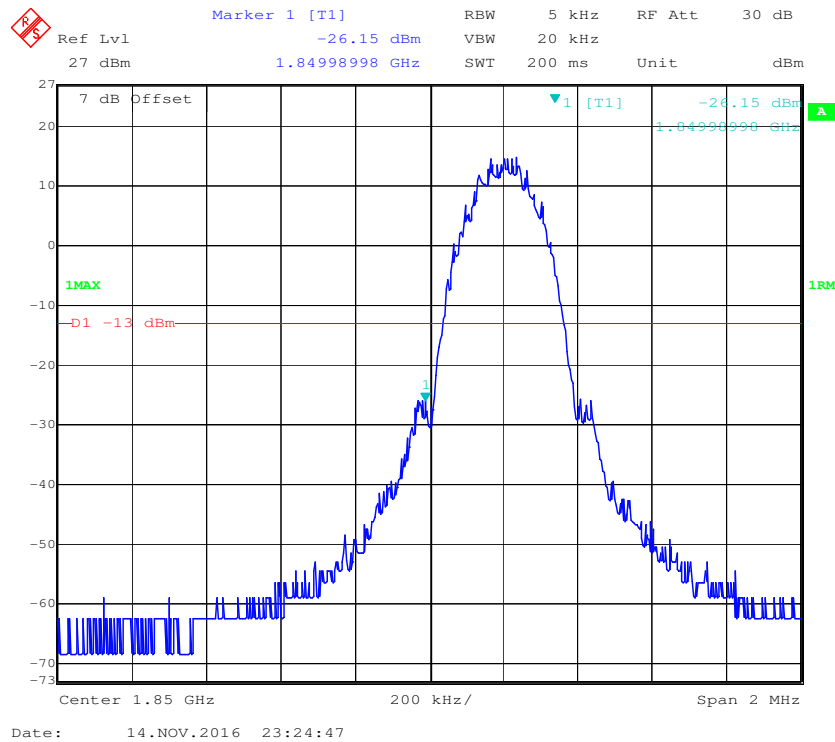


PCS Band, Right Band Edge for EGPRS (8PSK) Mode

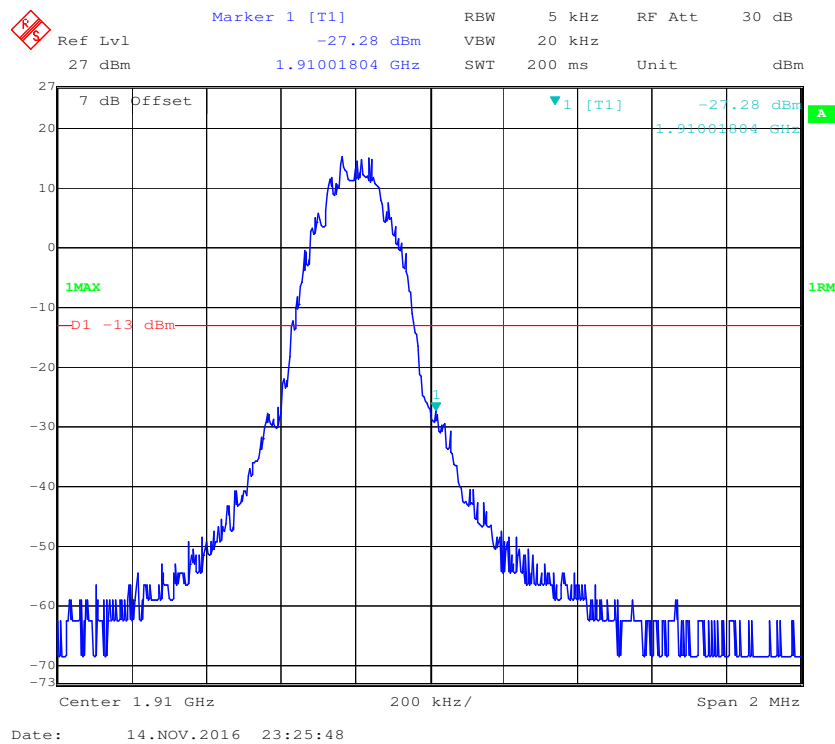


PCS Band, Left Band Edge for RMC (BPSK) Mode

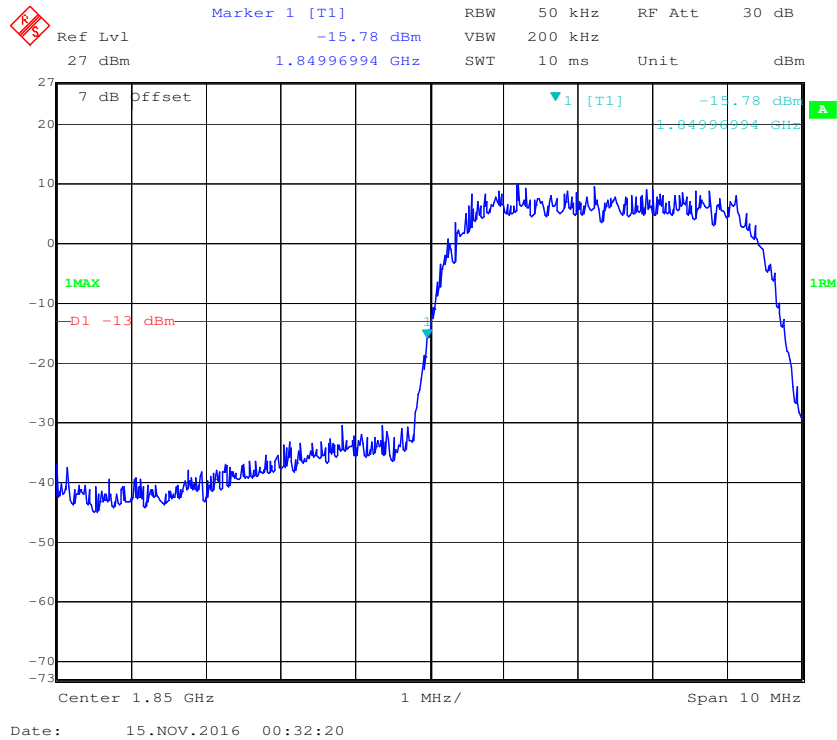


PCS Band, Right Band Edge for RMC (BPSK) Mode

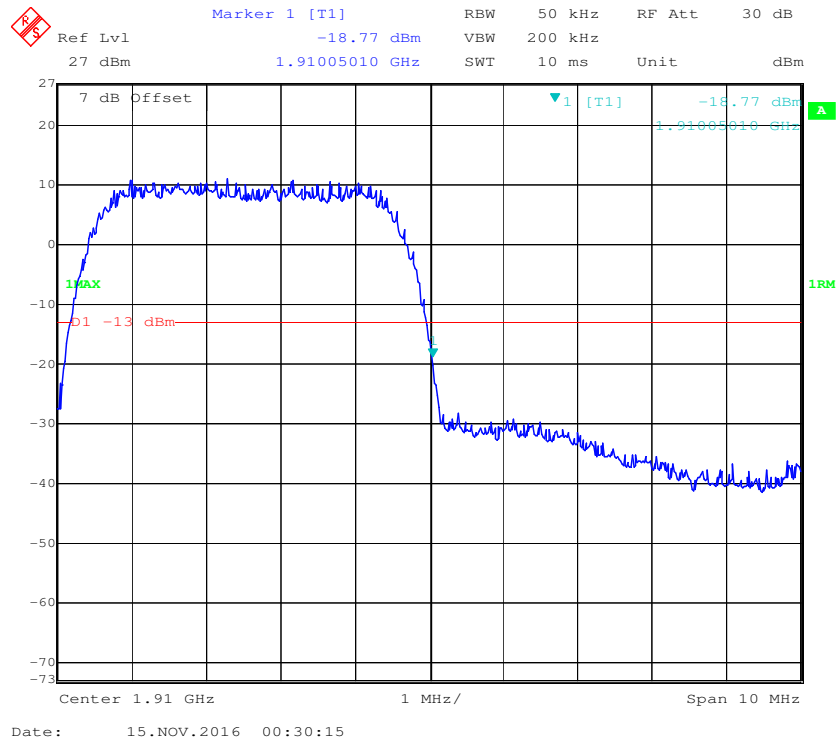


PCS Band, Left Band Edge for HSDPA (16QAM) Mode

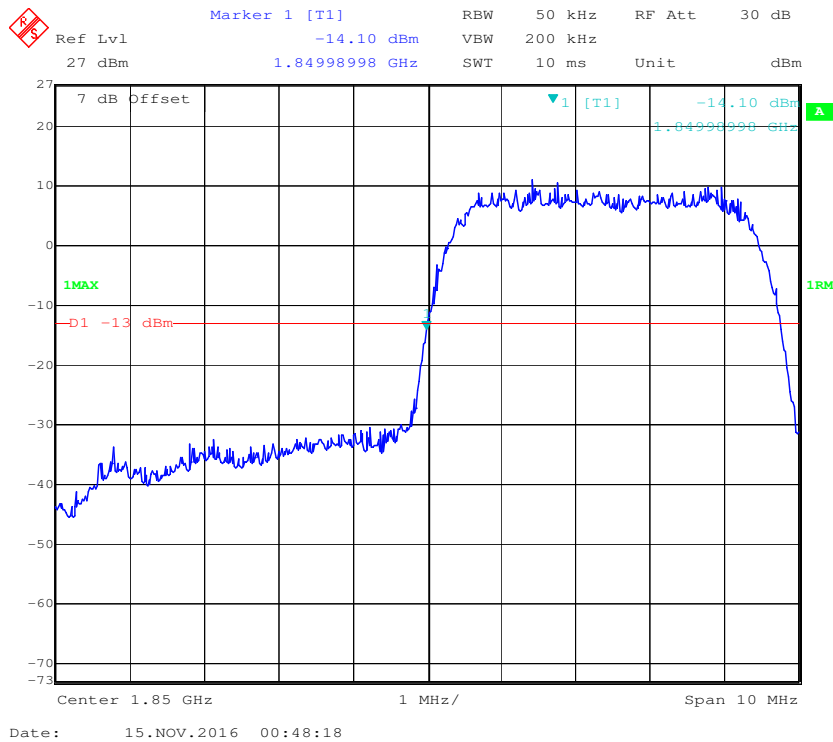


PCS Band, Right Band Edge for HSDPA (16QAM) Mode

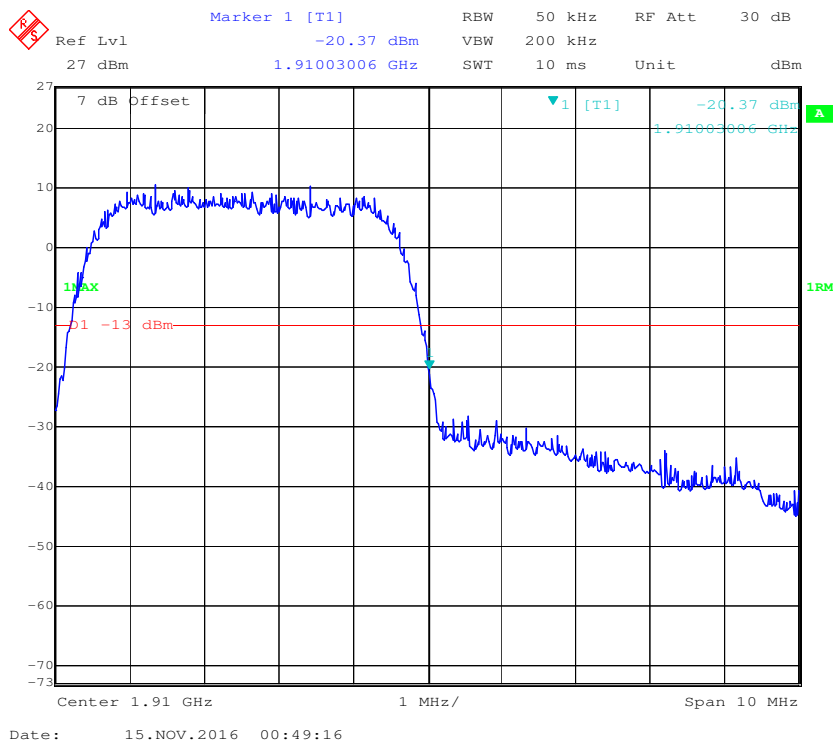

PCS Band, Left Band Edge for HSUPA (BPSK) Mode

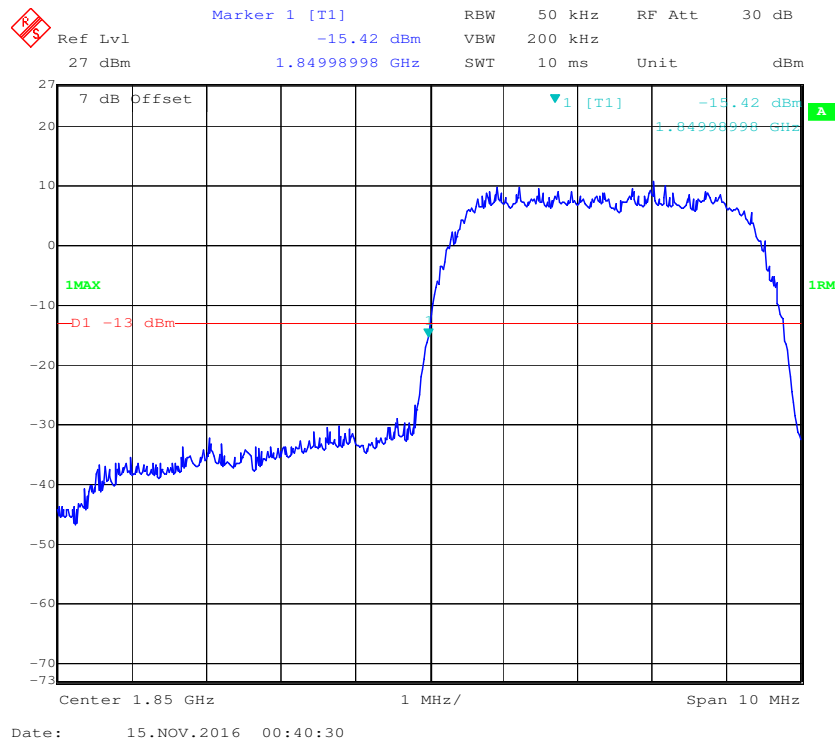


PCS Band, Right Band Edge for HSUPA (BPSK) Mode

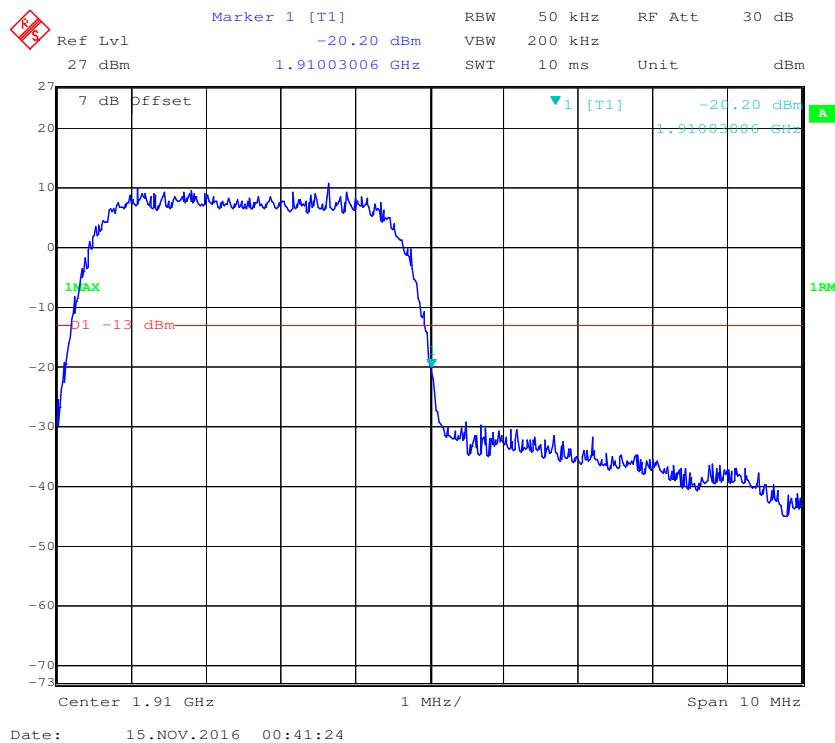


Band 4:


QPSK (1.4 MHz, FULL RB) - Left Band Edge

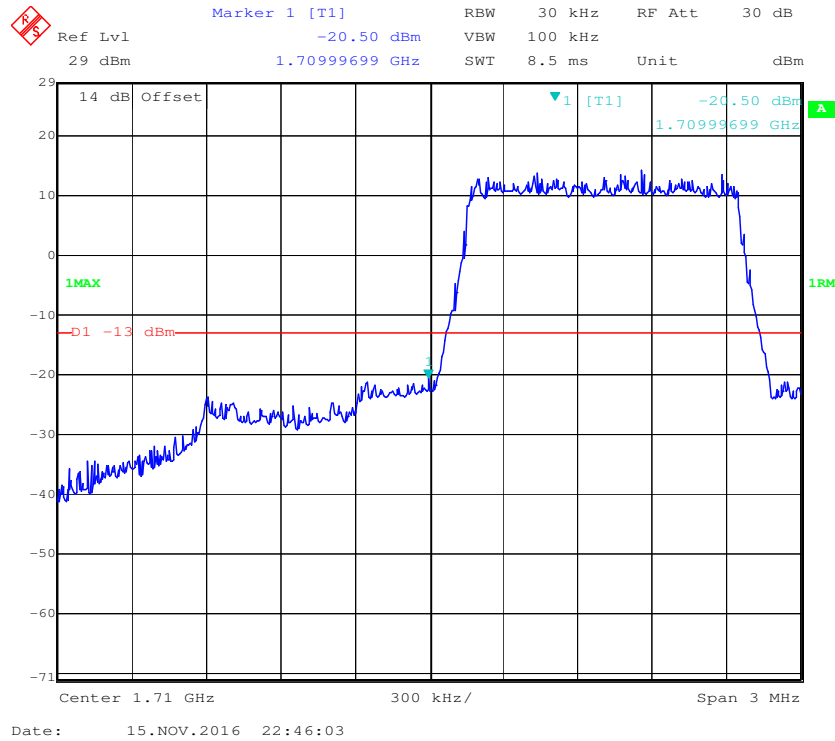


QPSK (1.4 MHz, FULL RB) - Right Band Edge

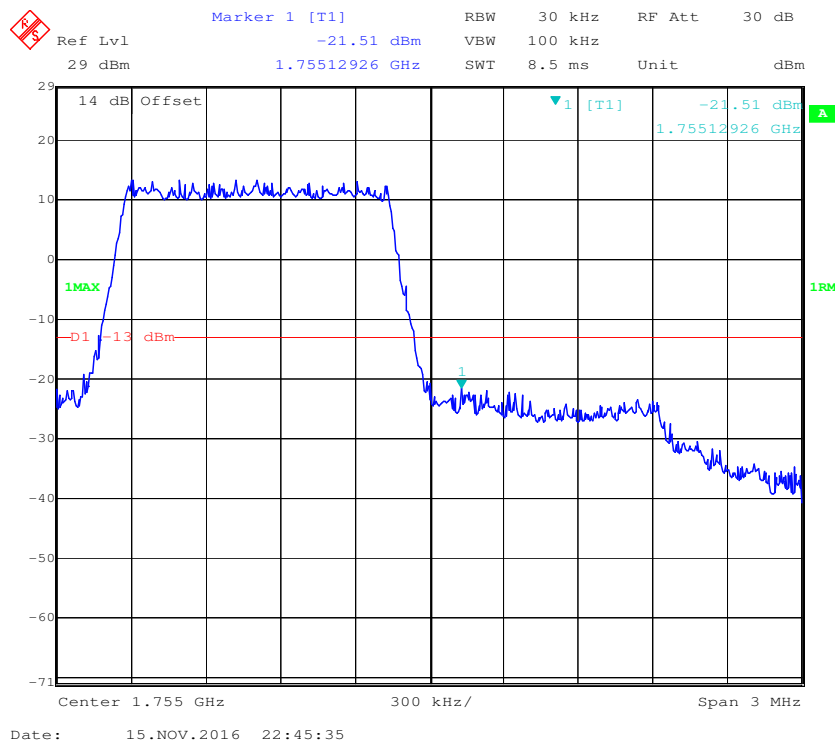


16-QAM (1.4 MHz, FULL RB) - Left Band Edge

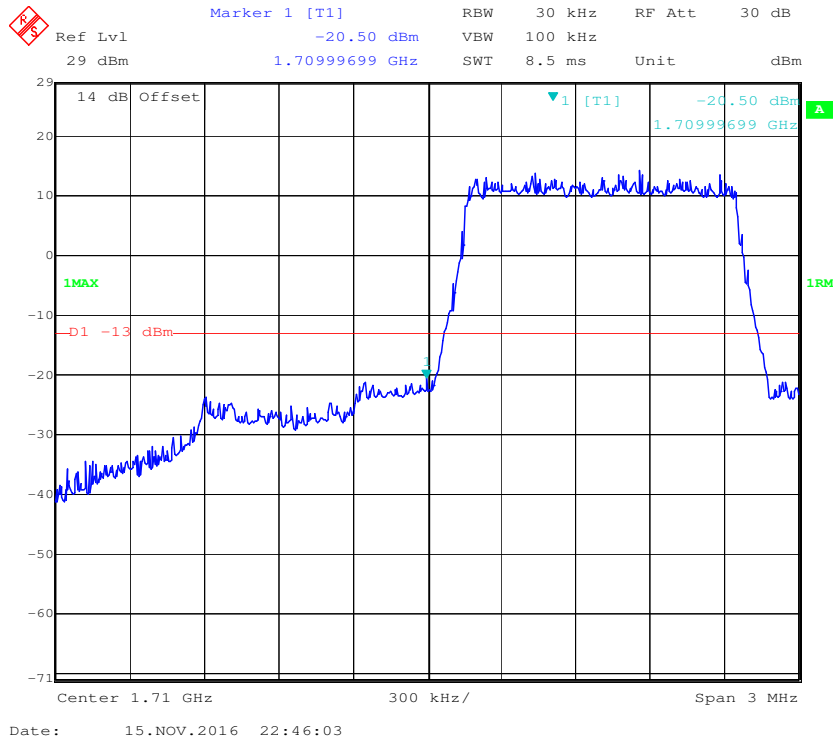


16-QAM (1.4 MHz, FULL RB) - Right Band Edge

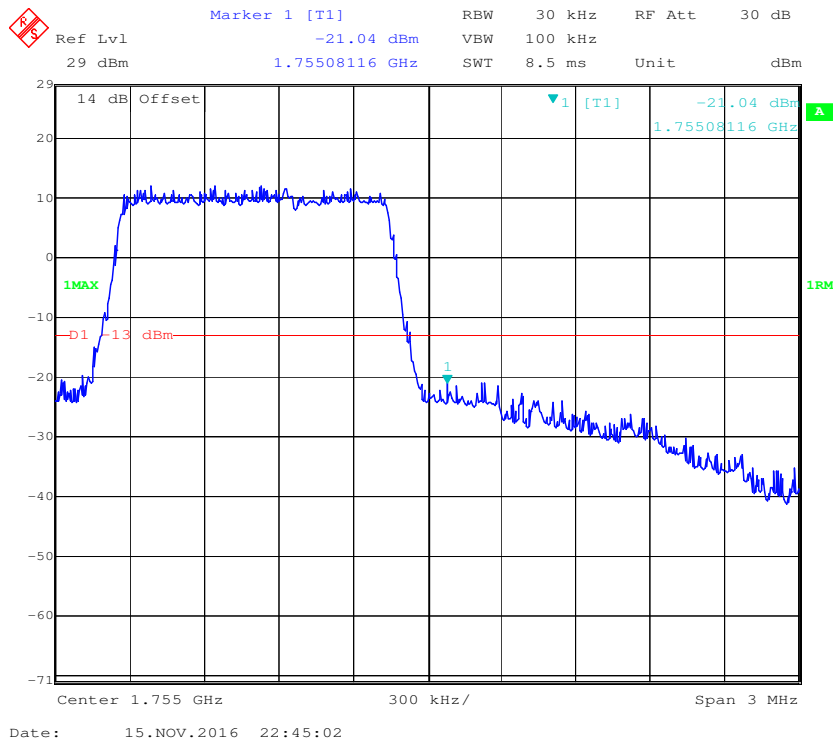


QPSK (3.0 MHz, FULL RB) - Left Band Edge

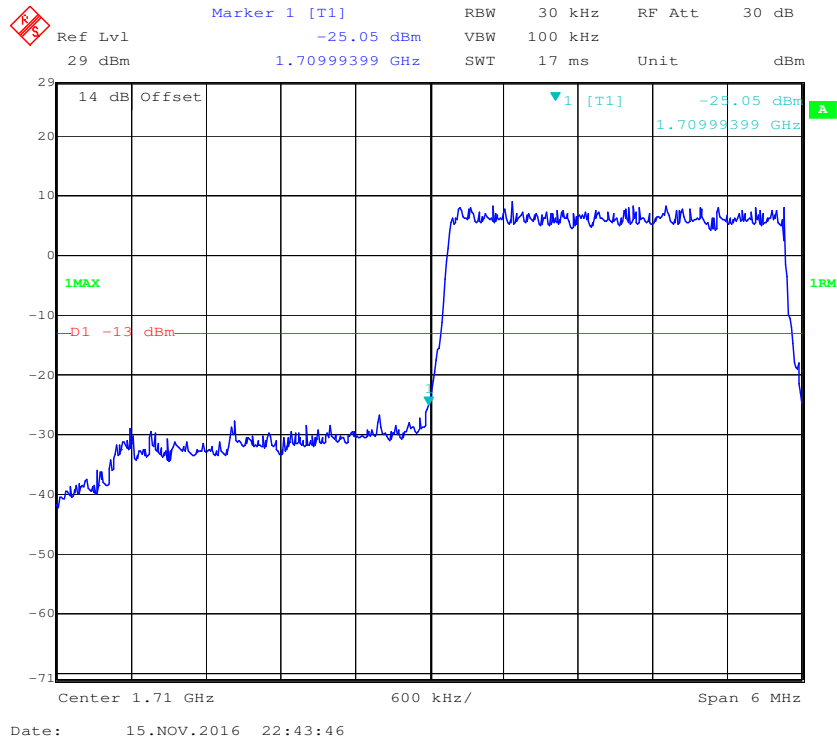


QPSK (3.0 MHz, FULL RB) - Right Band Edge

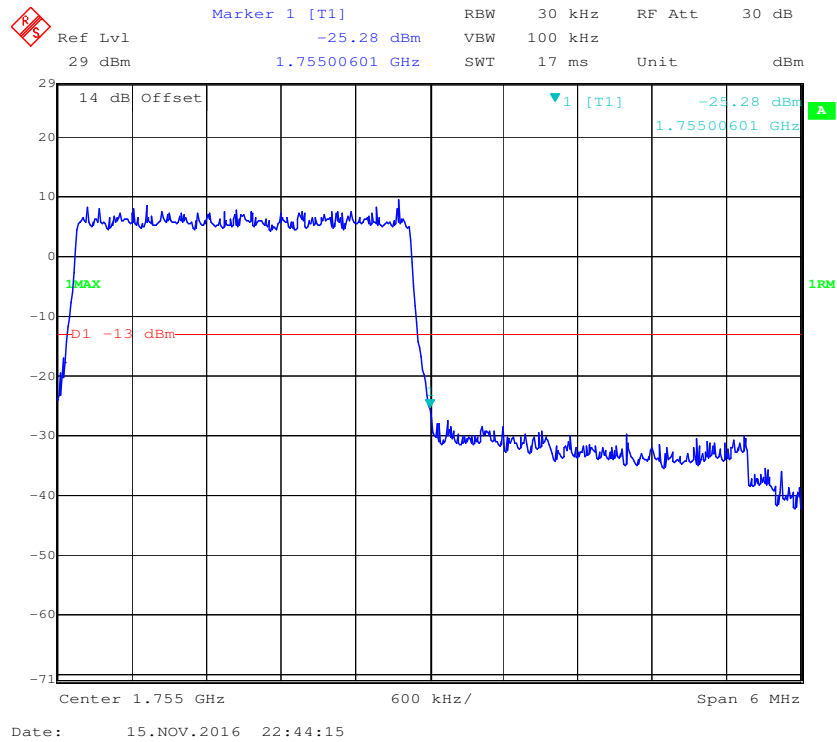


16-QAM (3.0 MHz, FULL RB) - Left Band Edge

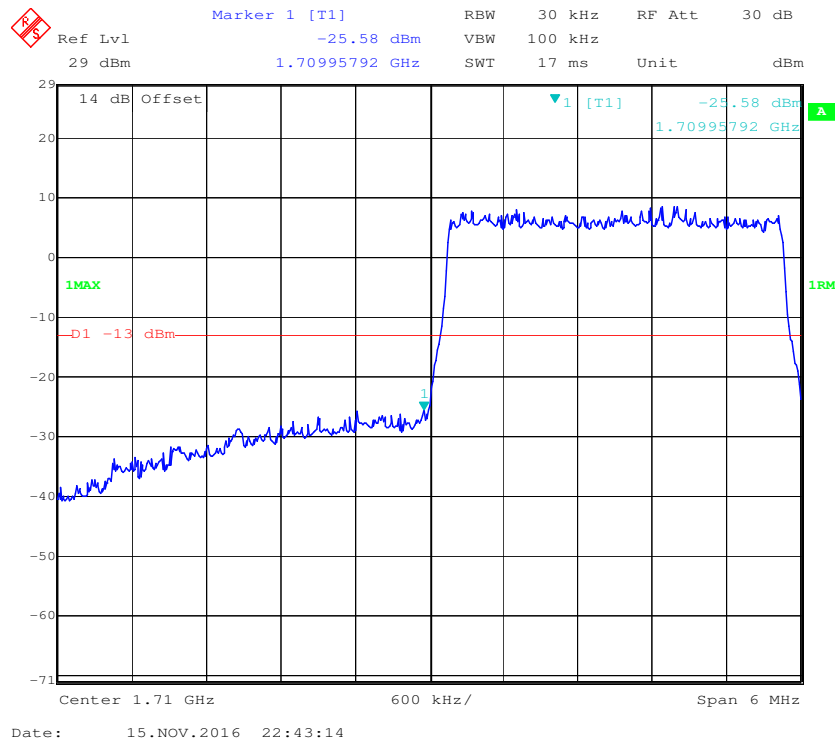


16-QAM (3.0 MHz, FULL RB) - Right Band Edge

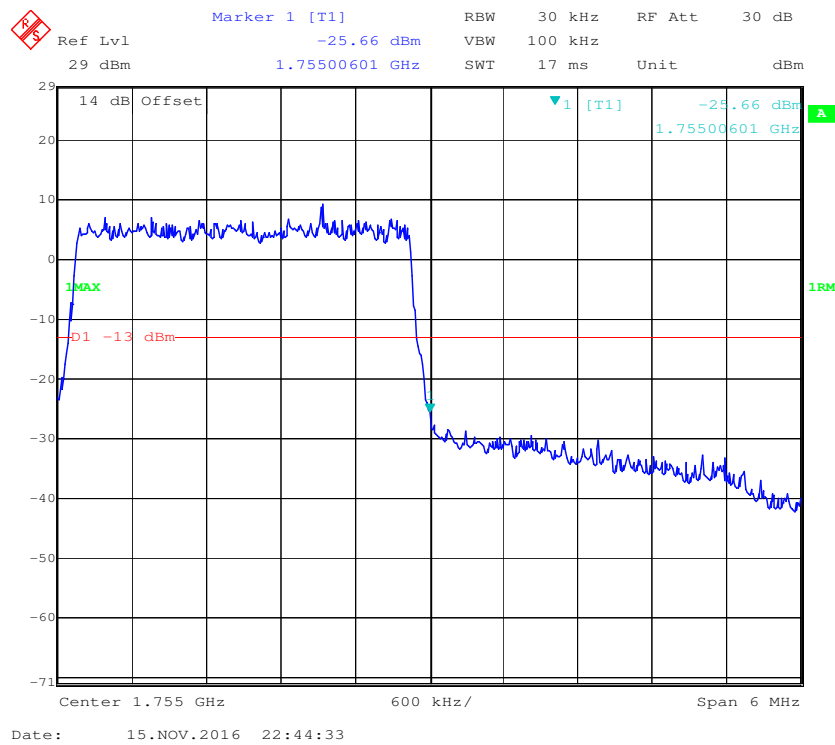


QPSK (5.0 MHz, FULL RB) - Left Band Edge

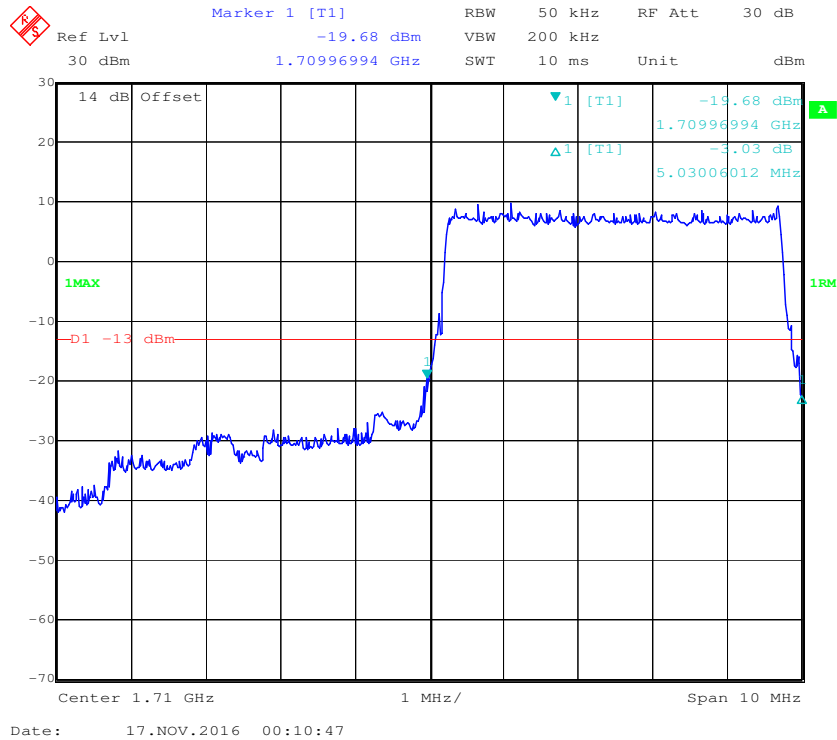


QPSK (5.0 MHz, FULL RB) - Right Band Edge

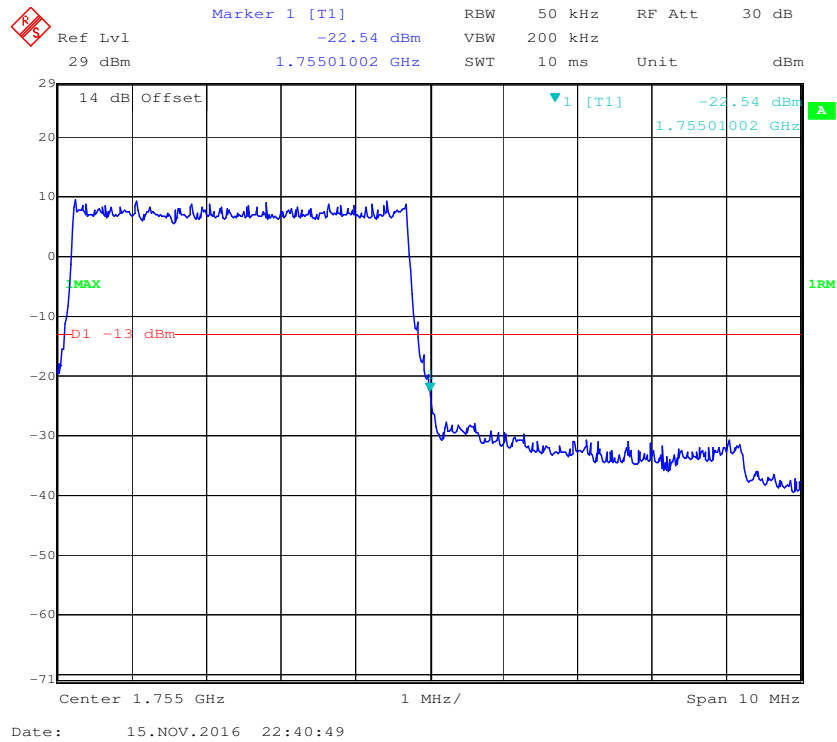


16-QAM (5.0 MHz, FULL RB) - Left Band Edge

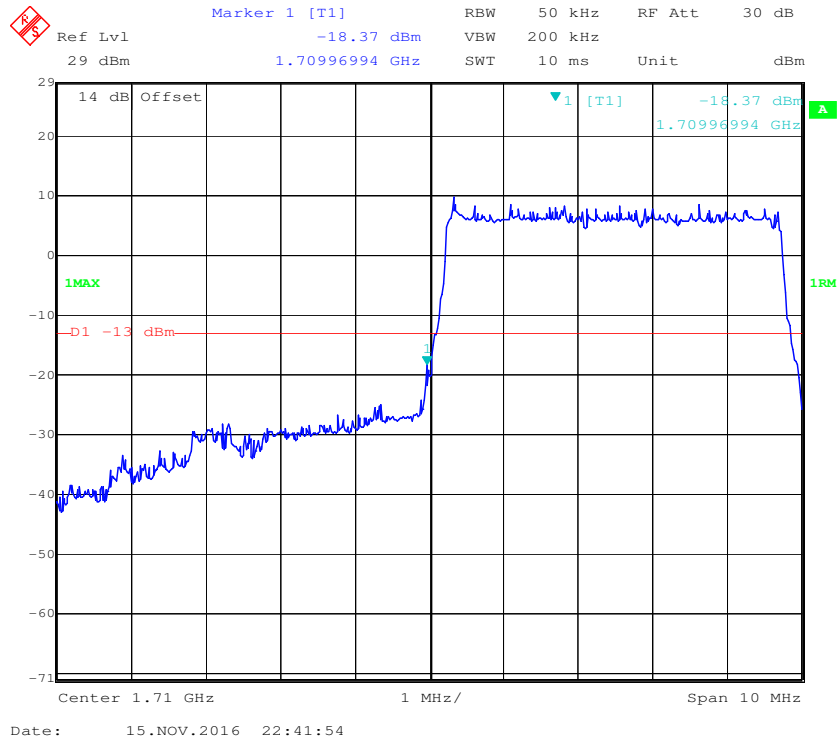


16-QAM (5.0 MHz, FULL RB) - Right Band Edge

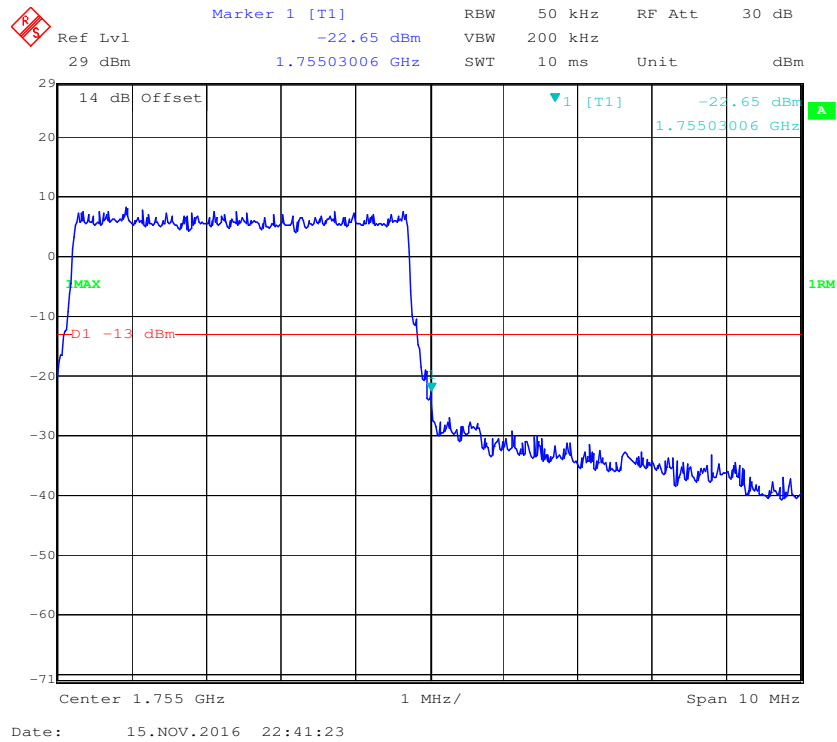


QPSK (10.0 MHz, FULL RB) - Left Band Edge

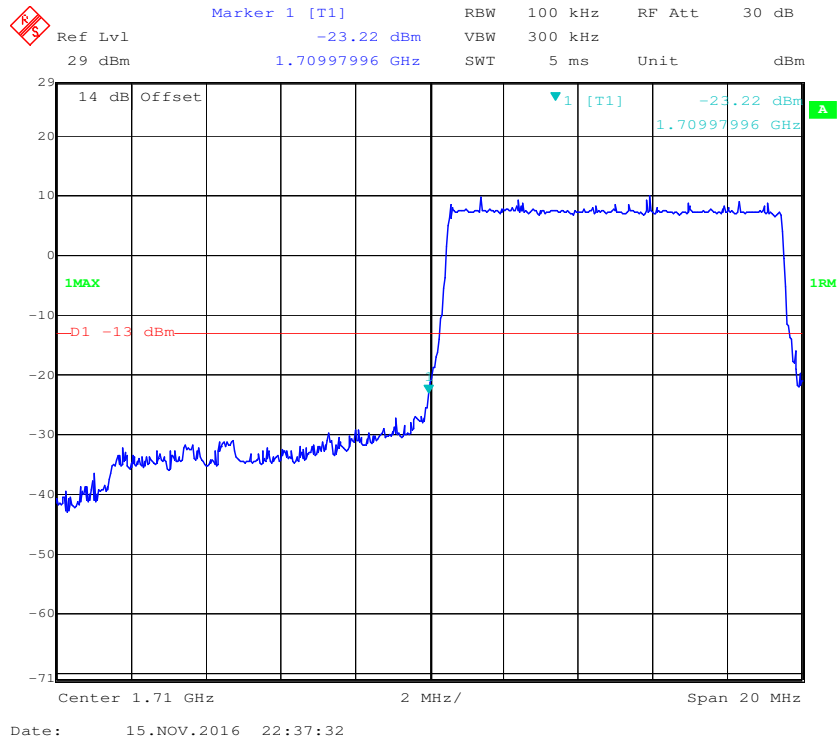


QPSK (10.0 MHz, FULL RB) - Right Band Edge

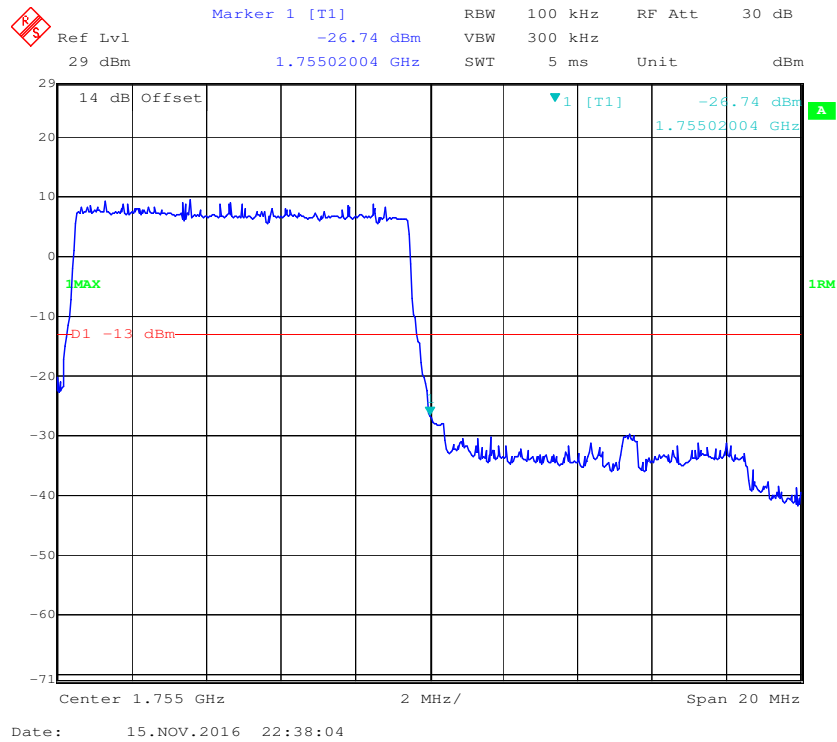


16-QAM (10.0 MHz, FULL RB) - Left Band Edge

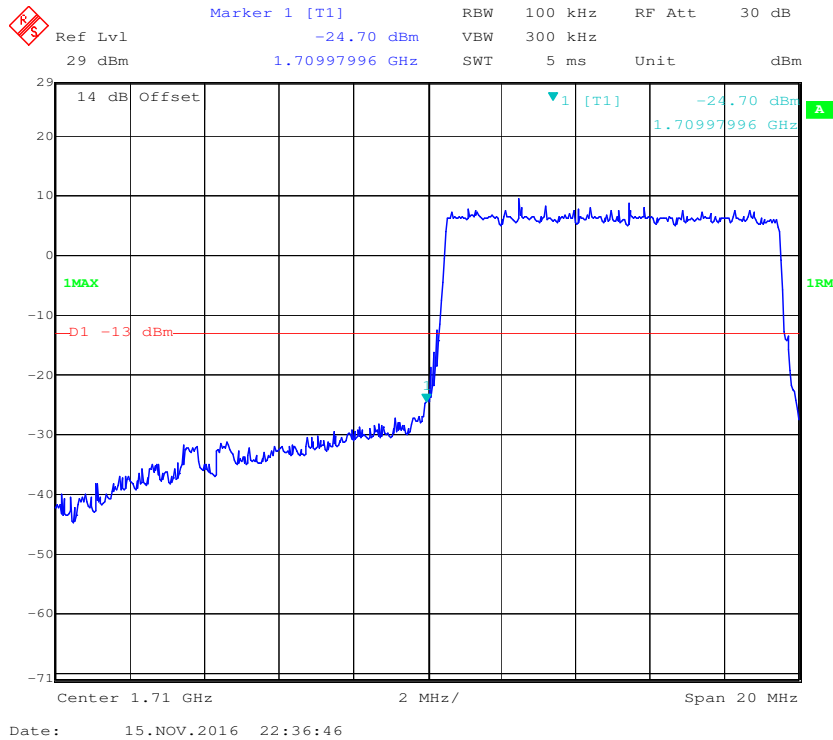


16-QAM (10.0 MHz, FULL RB) - Right Band Edge


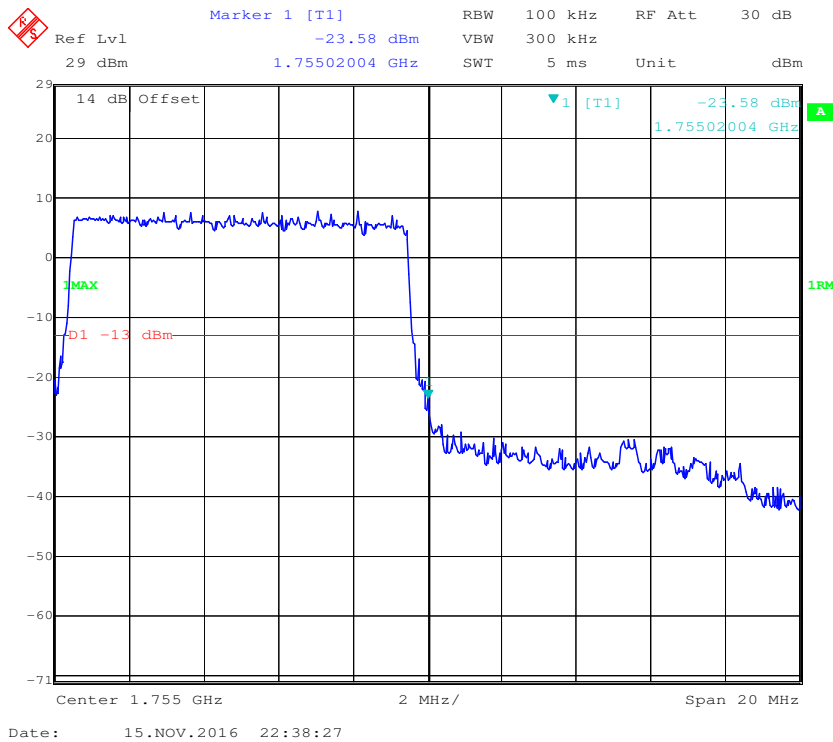


QPSK (15.0 MHz, FULL RB) - Left Band Edge

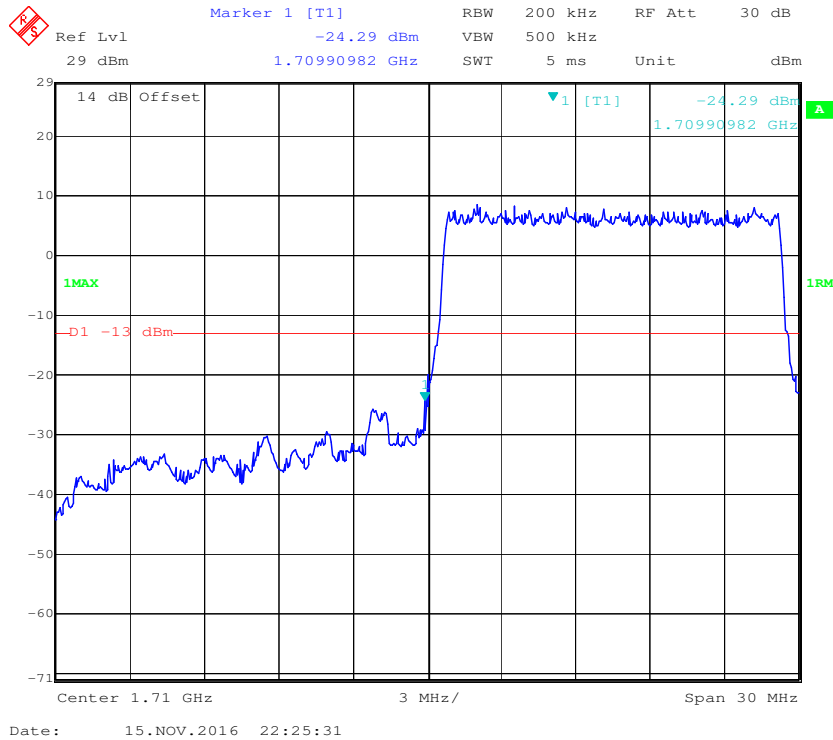


QPSK (15.0 MHz, FULL RB) - Right Band Edge

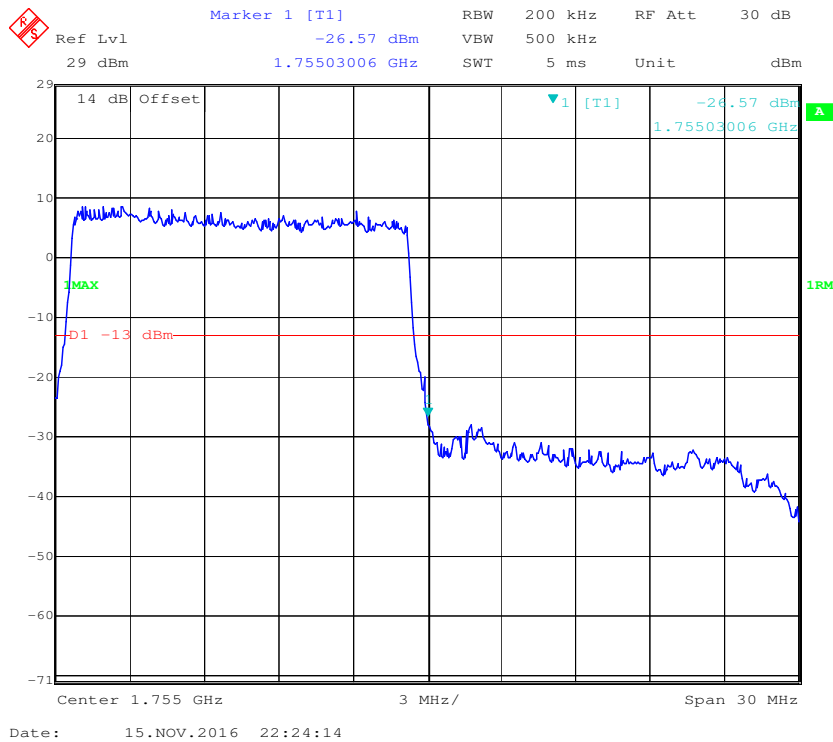


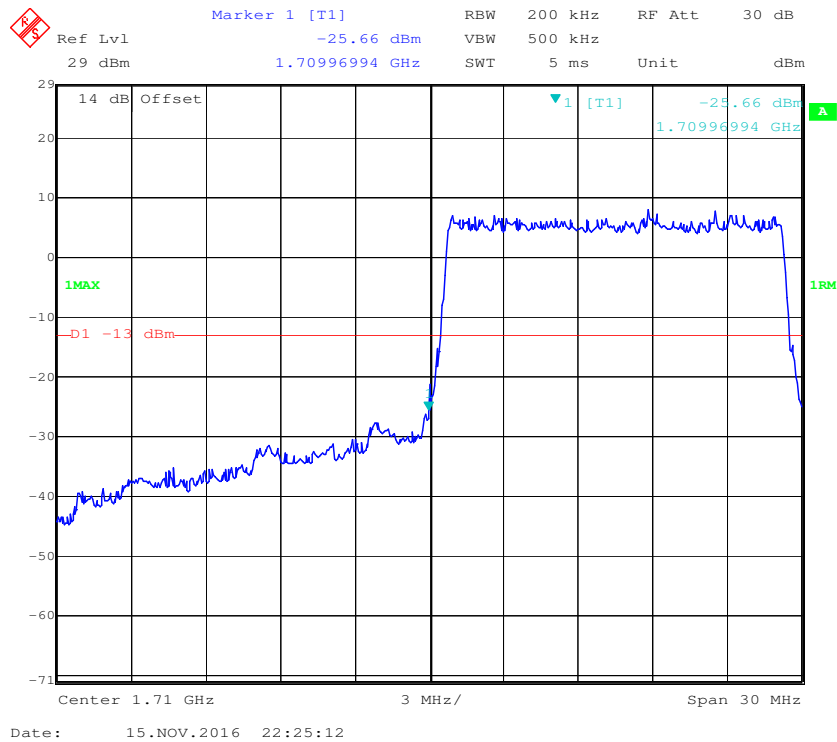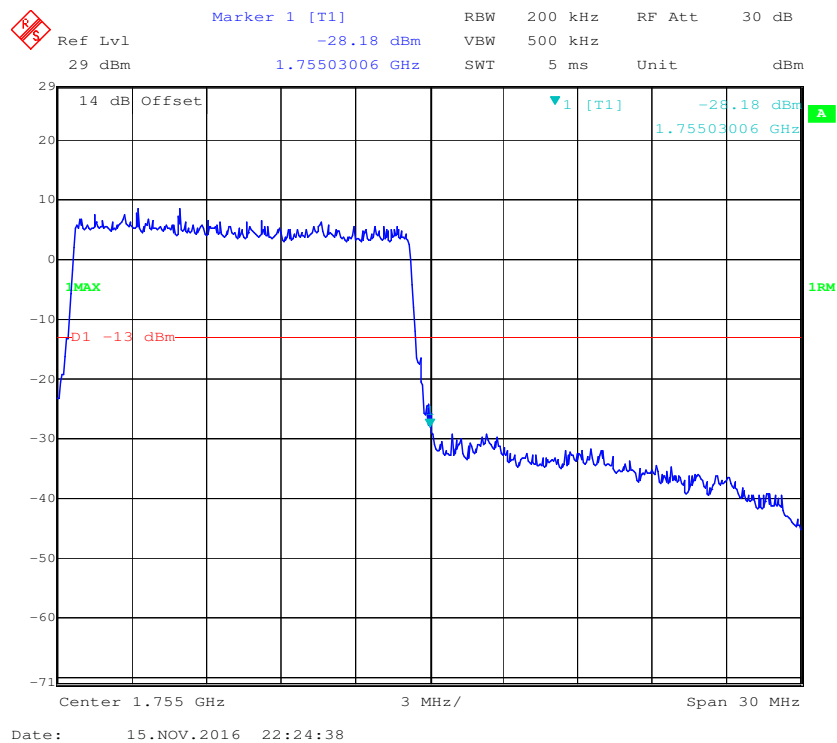16-QAM (15.0 MHz, FULL RB) - Left Band Edge**16-QAM (15.0 MHz, FULL RB) - Right Band Edge**


QPSK (20.0 MHz, FULL RB) - Left Band Edge

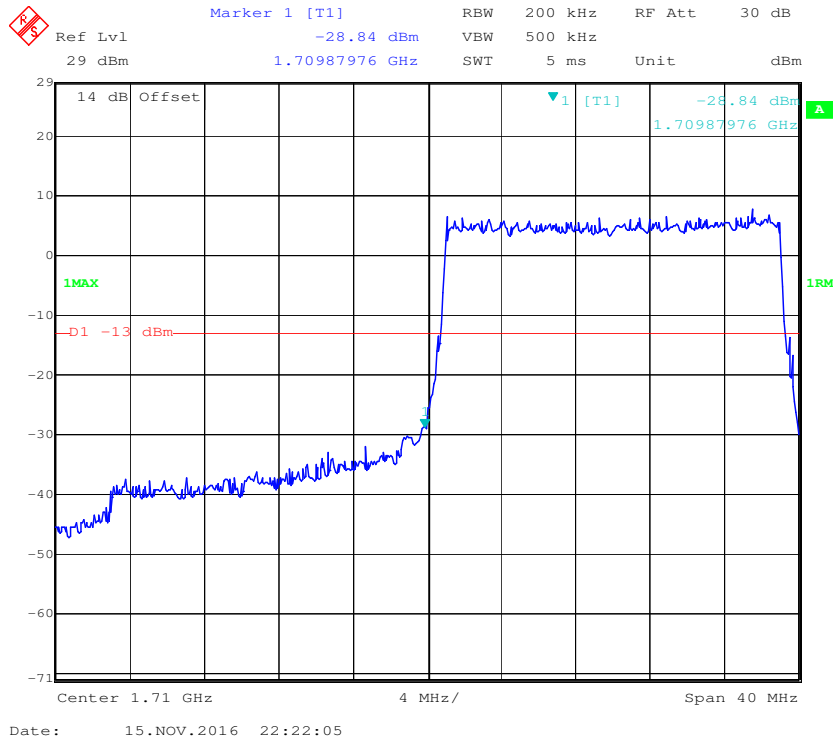


QPSK (20.0 MHz, FULL RB) - Right Band Edge


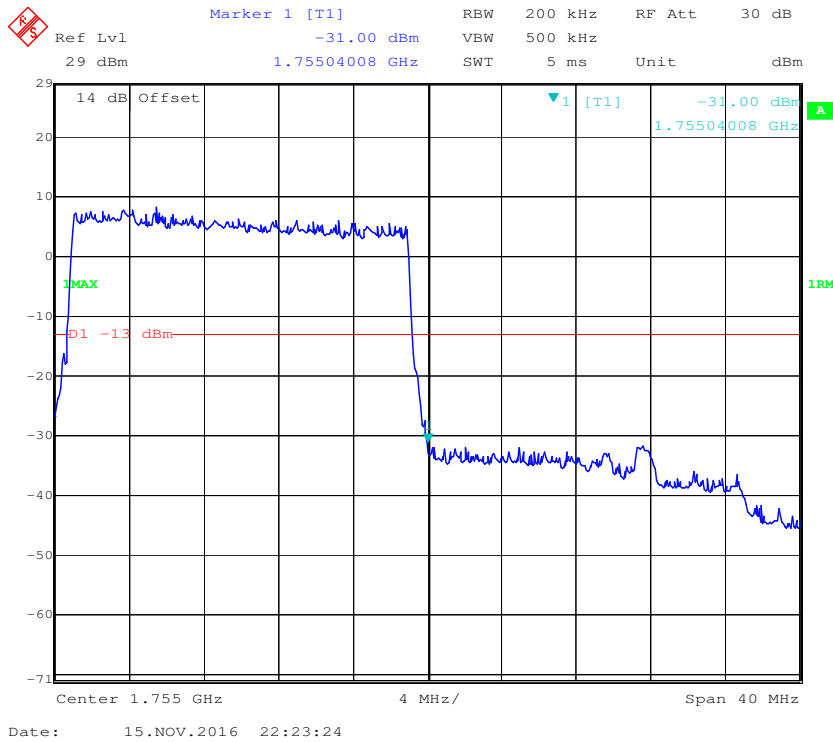


16-QAM (20.0 MHz, FULL RB) - Left Band Edge

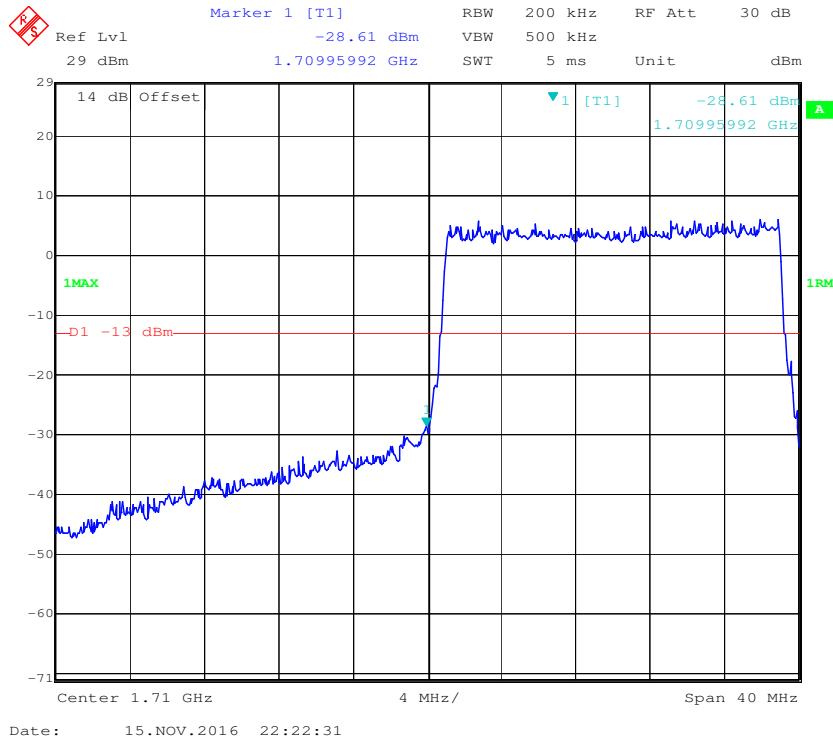


16-QAM (20.0 MHz, FULL RB) - Right Band Edge

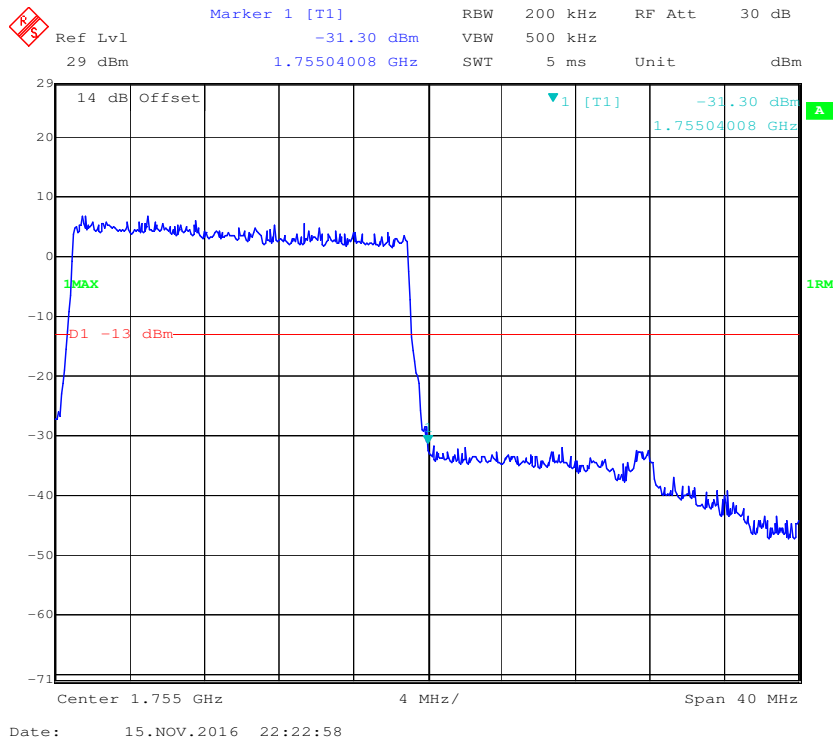


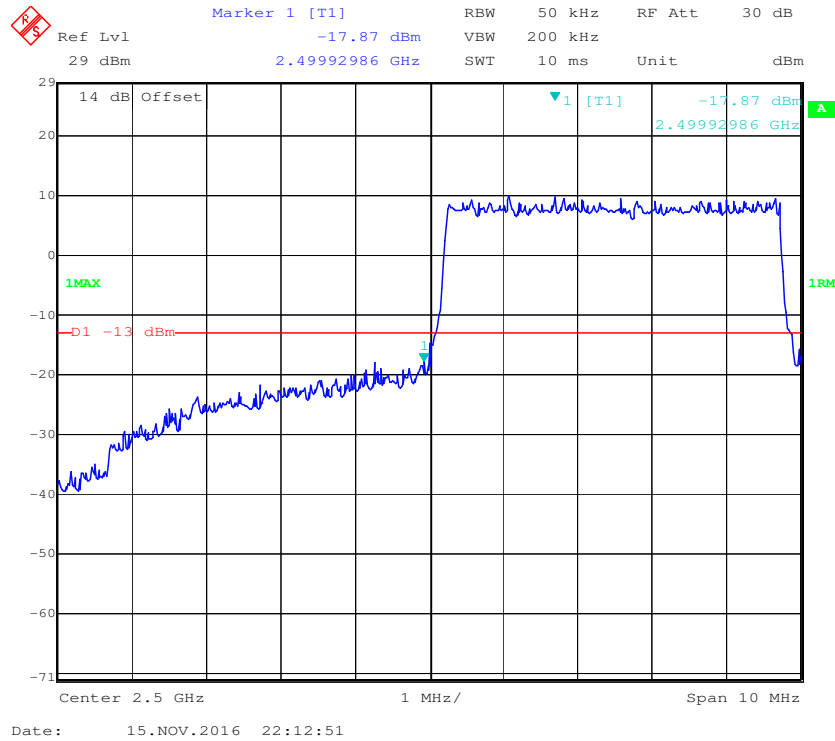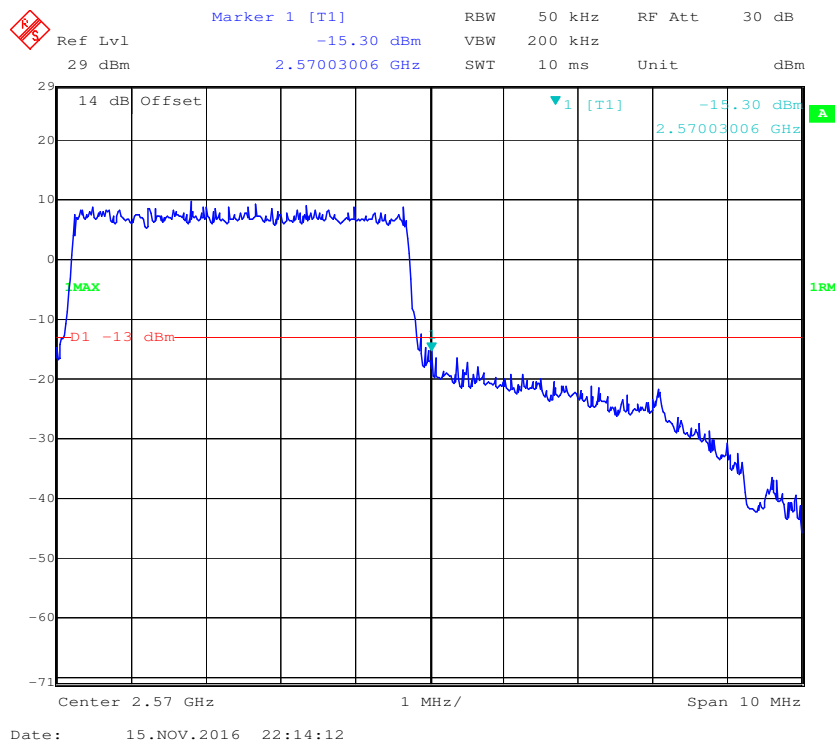Band 7:**QPSK (5.0 MHz, FULL RB) - Left Band Edge****QPSK (5.0 MHz, FULL RB) - Right Band Edge**


16-QAM (5.0 MHz, FULL RB) - Left Band Edge

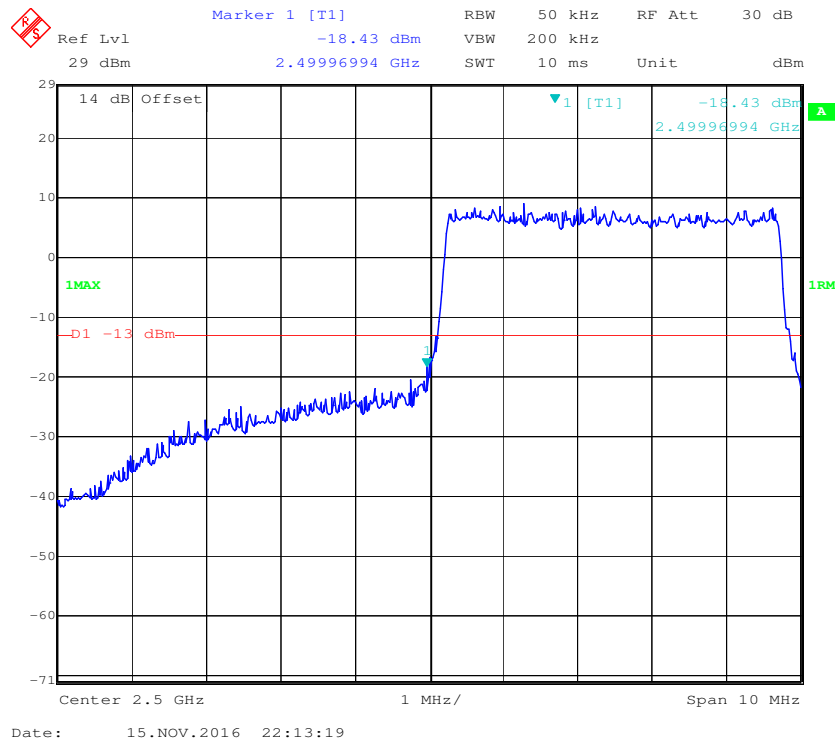


16-QAM (5.0 MHz, FULL RB) - Right Band Edge

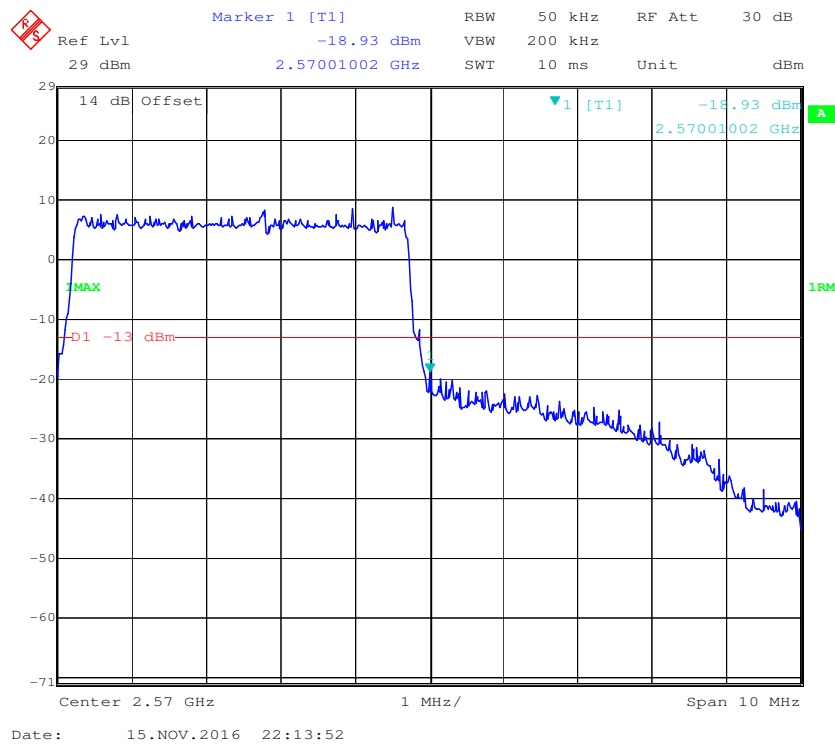


QPSK (10.0 MHz, FULL RB) - Left Band Edge

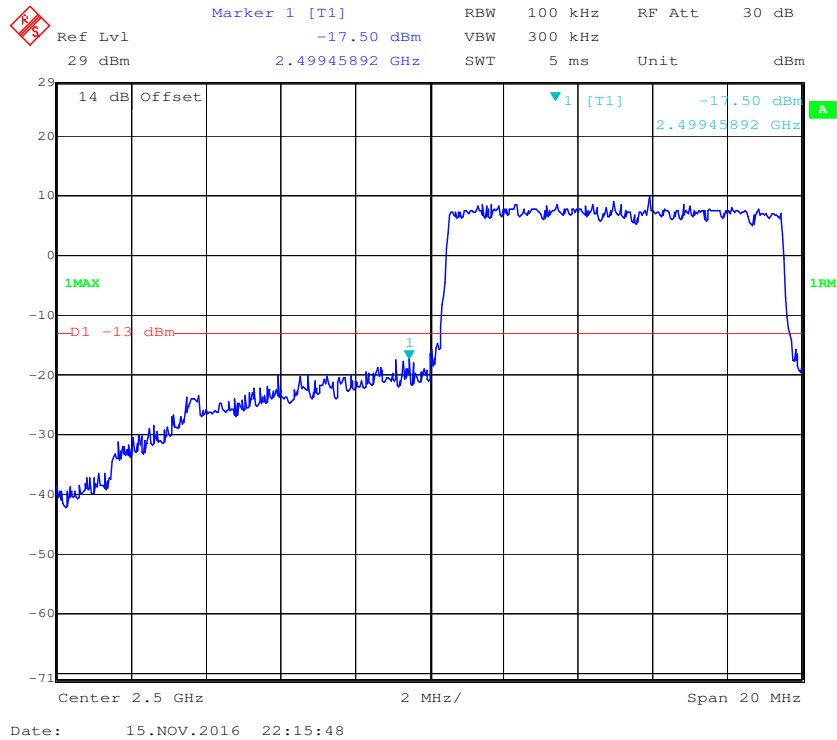


QPSK (10.0 MHz, FULL RB) - Right Band Edge

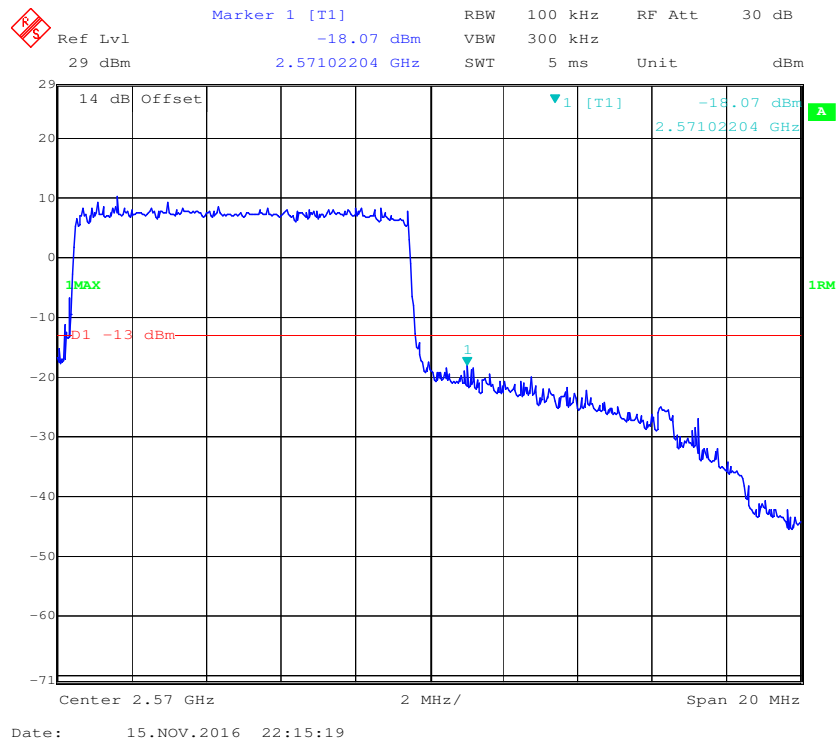


16-QAM (10.0 MHz, FULL RB) - Left Band Edge

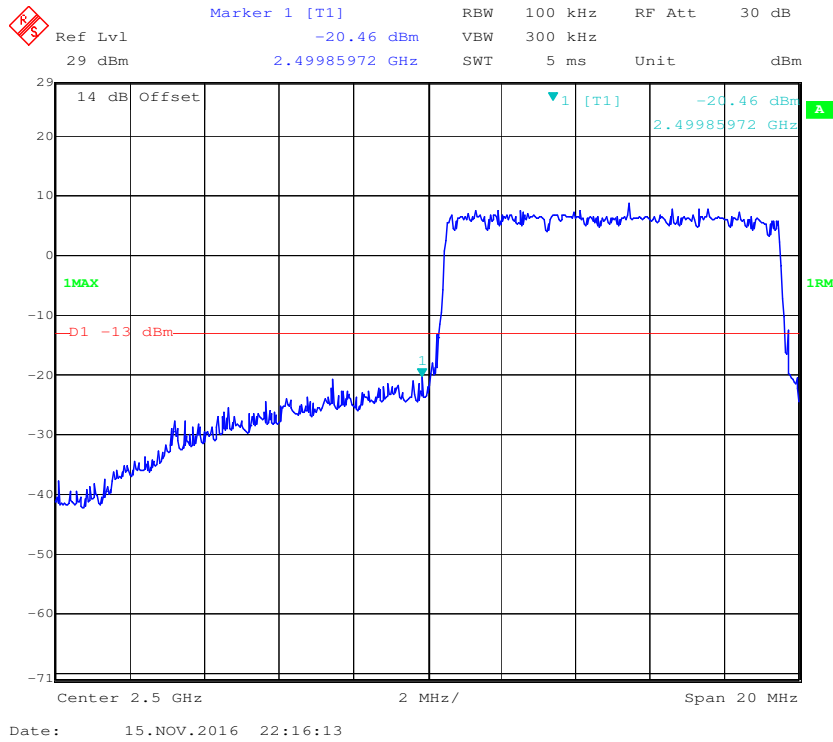


16-QAM (10.0 MHz, FULL RB) - Right Band Edge

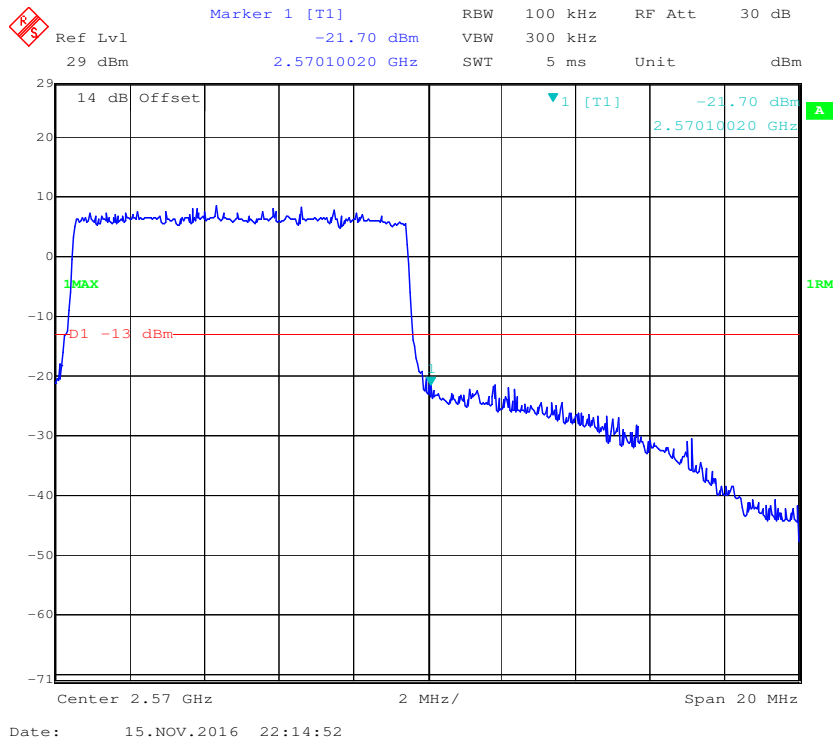


QPSK (15 MHz, FULL RB) - Left Band Edge

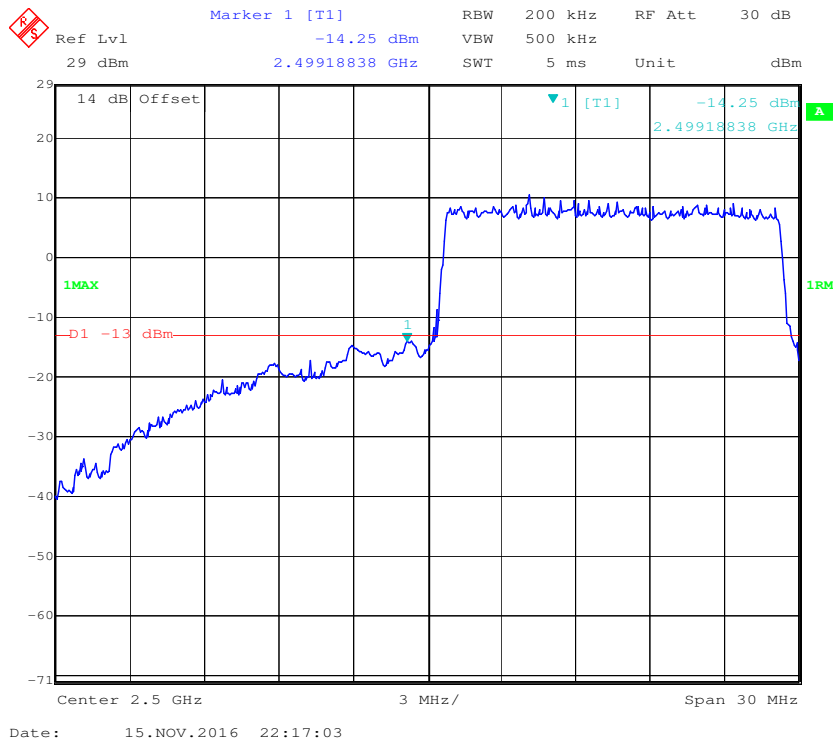


QPSK (15 MHz, FULL RB) - Right Band Edge

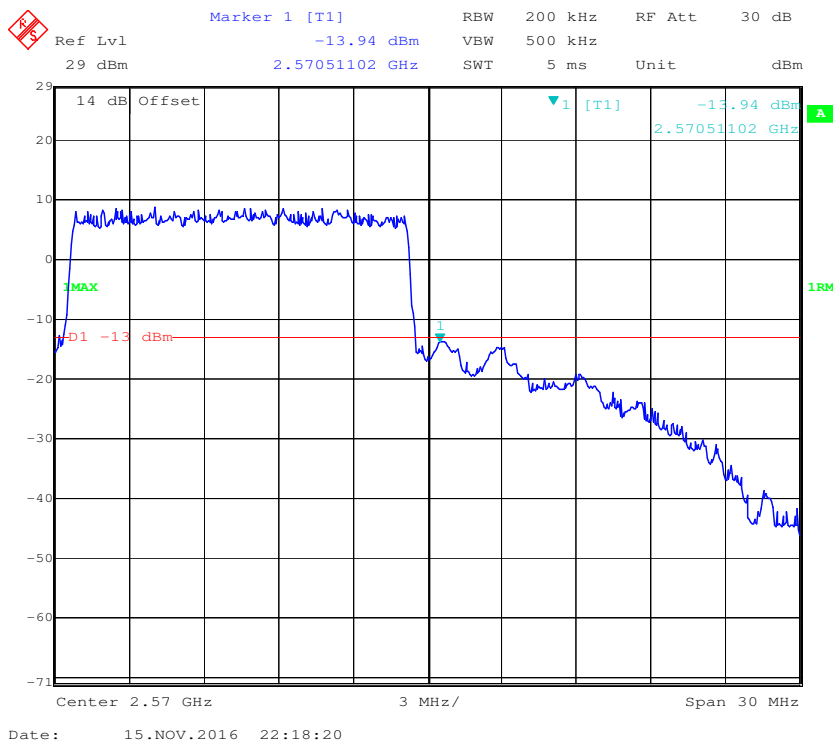


16-QAM (15 MHz, FULL RB) - Left Band Edge

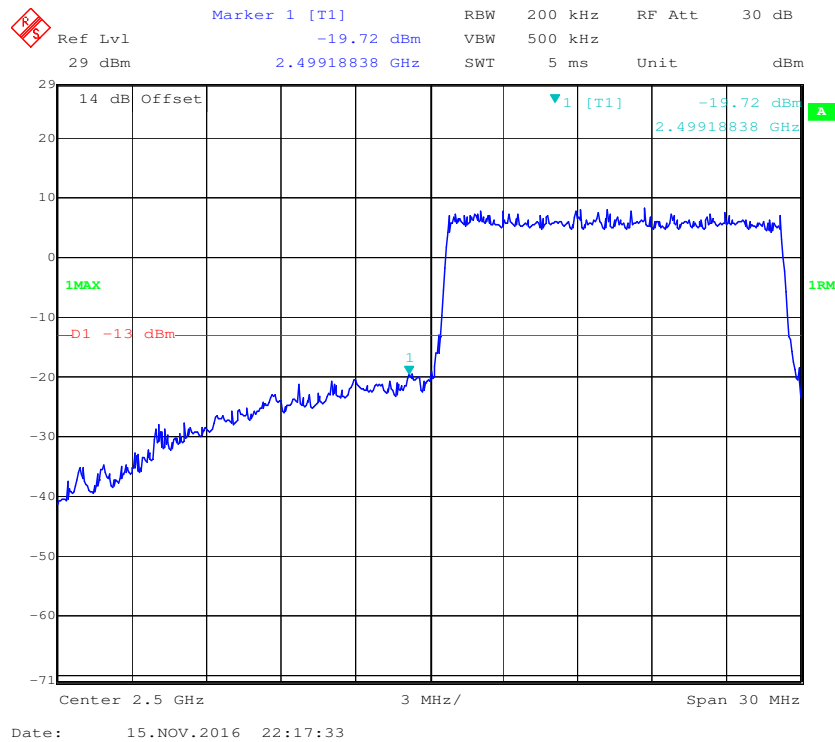


16-QAM (15 MHz, FULL RB) - Right Band Edge

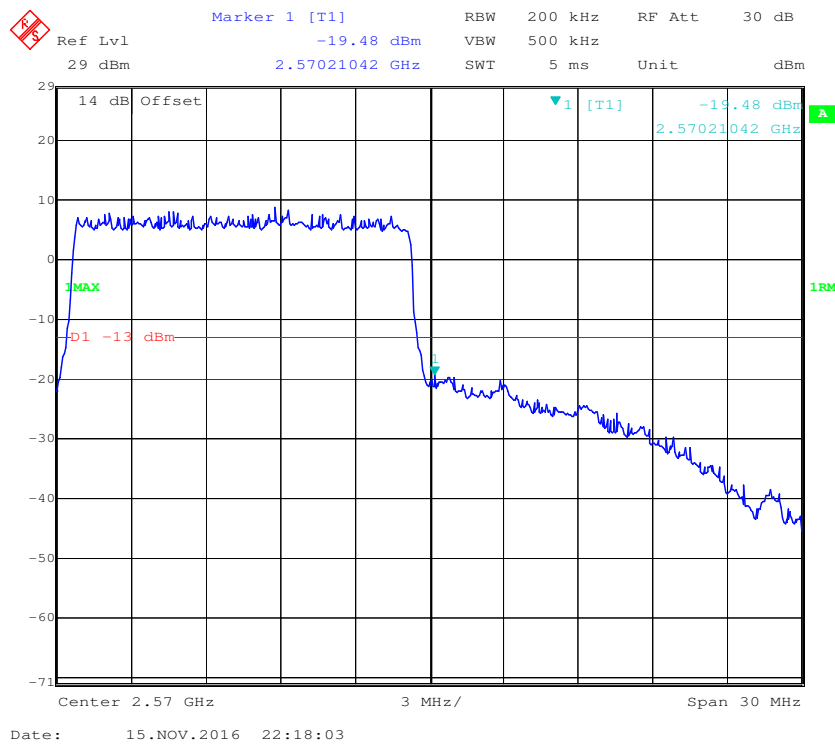


QPSK (20 MHz, FULL RB) - Left Band Edge

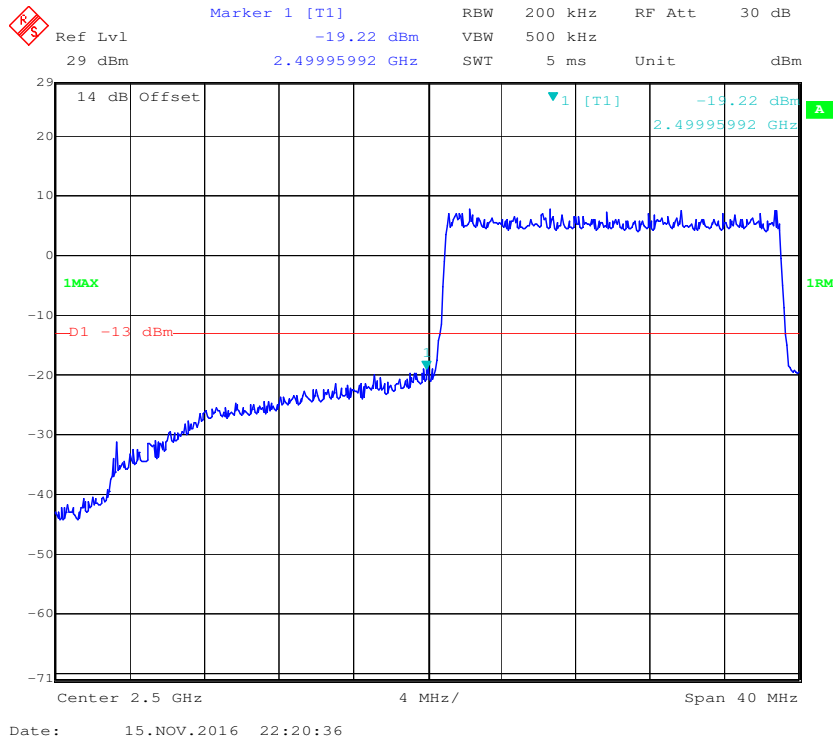


QPSK (20 MHz, FULL RB) - Right Band Edge

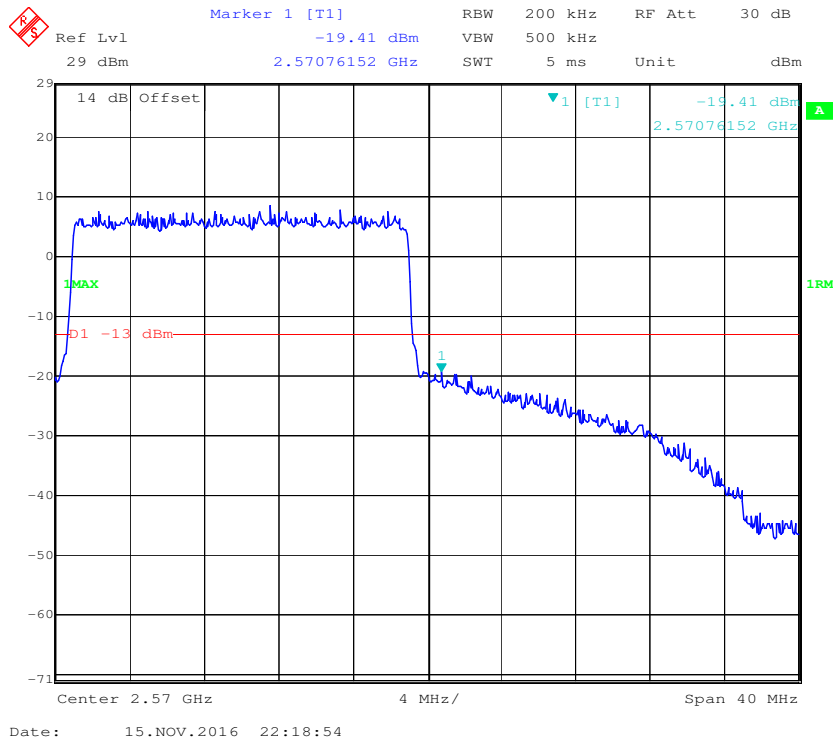

16-QAM (20 MHz, FULL RB) - Left Band Edge

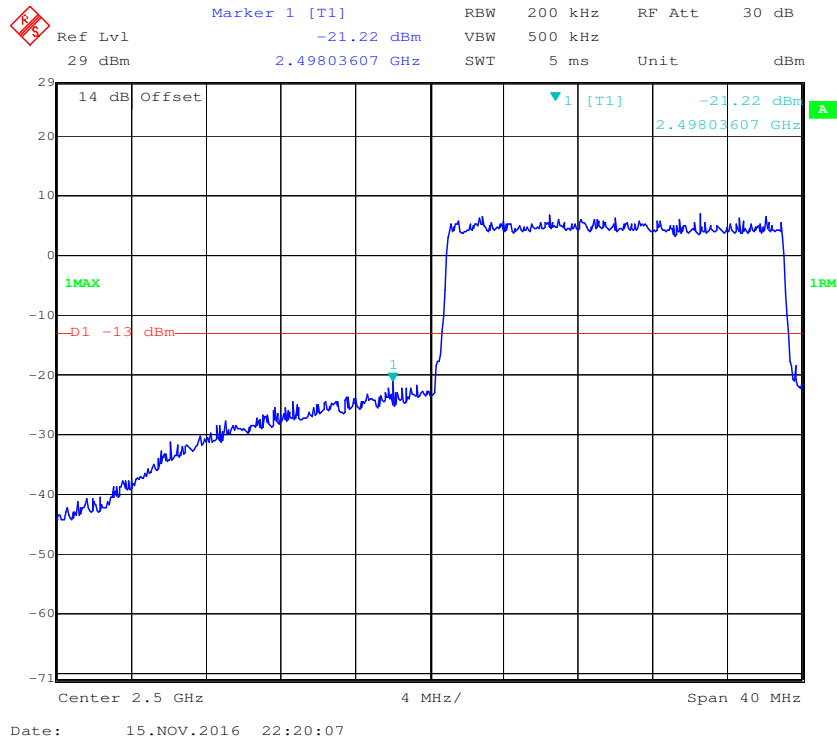


16-QAM (20 MHz, FULL RB) - Right Band Edge

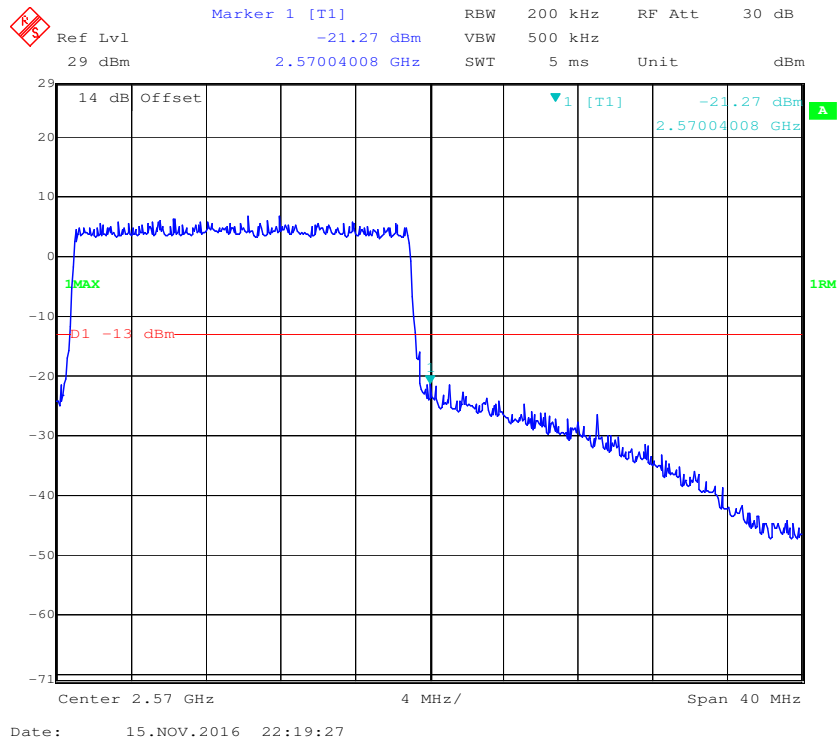




Band 17:

QPSK (5.0 MHz, FULL RB) - Left Band Edge

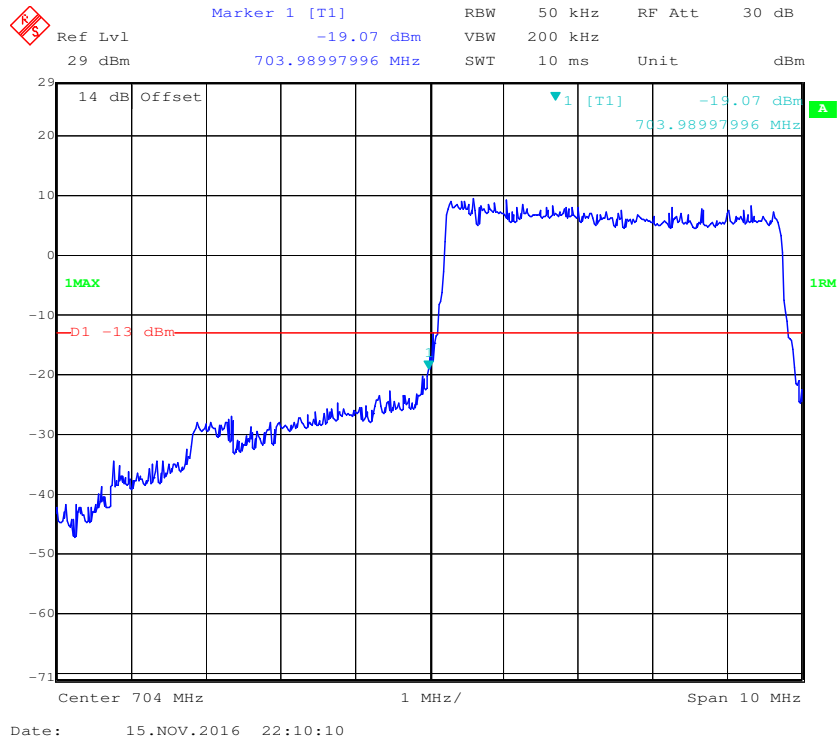


QPSK (5.0 MHz, FULL RB) - Right Band Edge

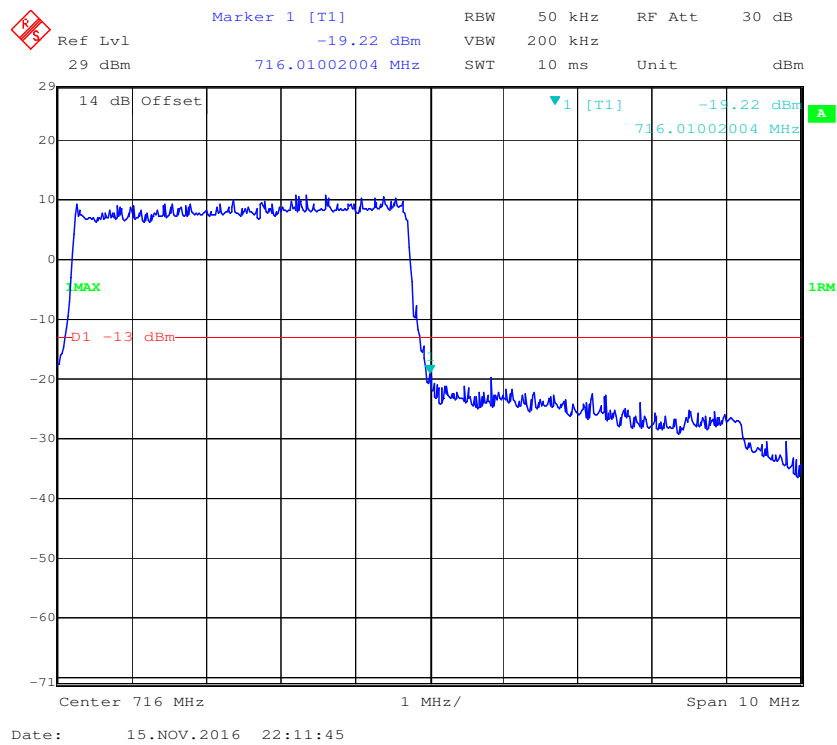


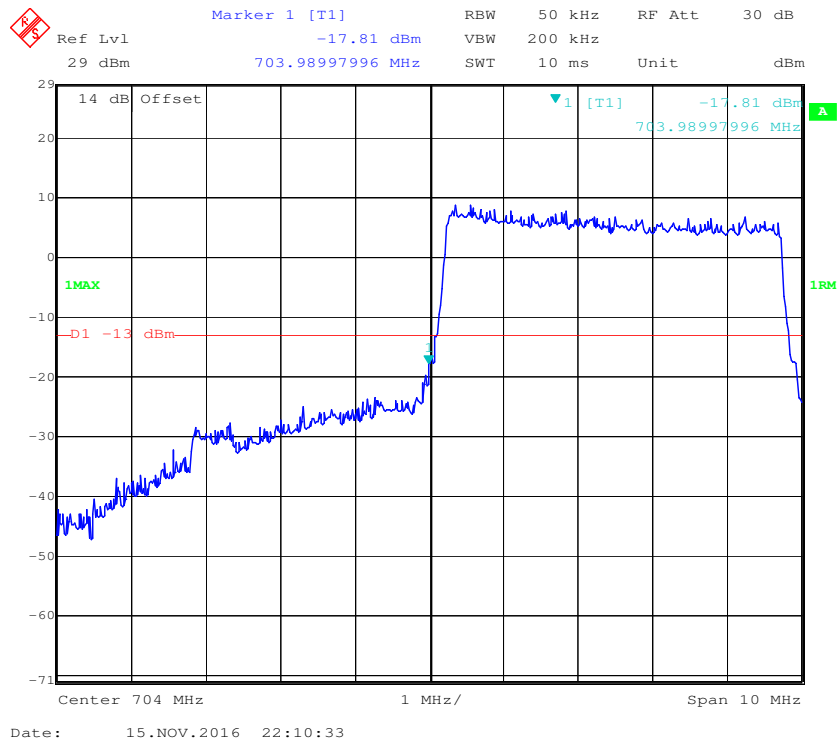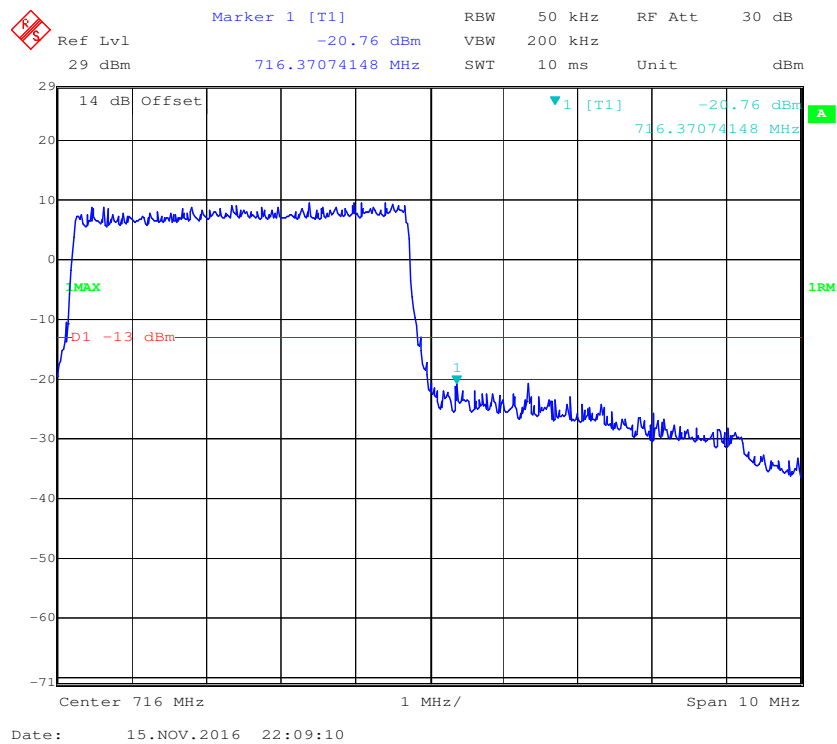16-QAM (5.0 MHz, FULL RB) - Left Band Edge**16-QAM (5.0 MHz, FULL RB) - Right Band Edge**


QPSK (10.0 MHz, FULL RB) - Left Band Edge

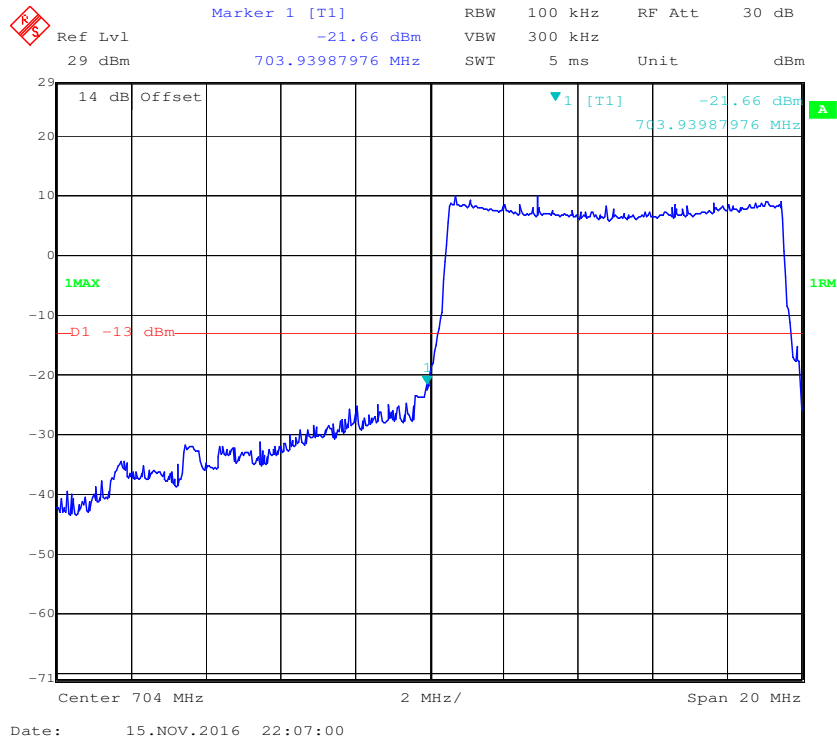


QPSK (10.0 MHz, FULL RB) - Right Band Edge

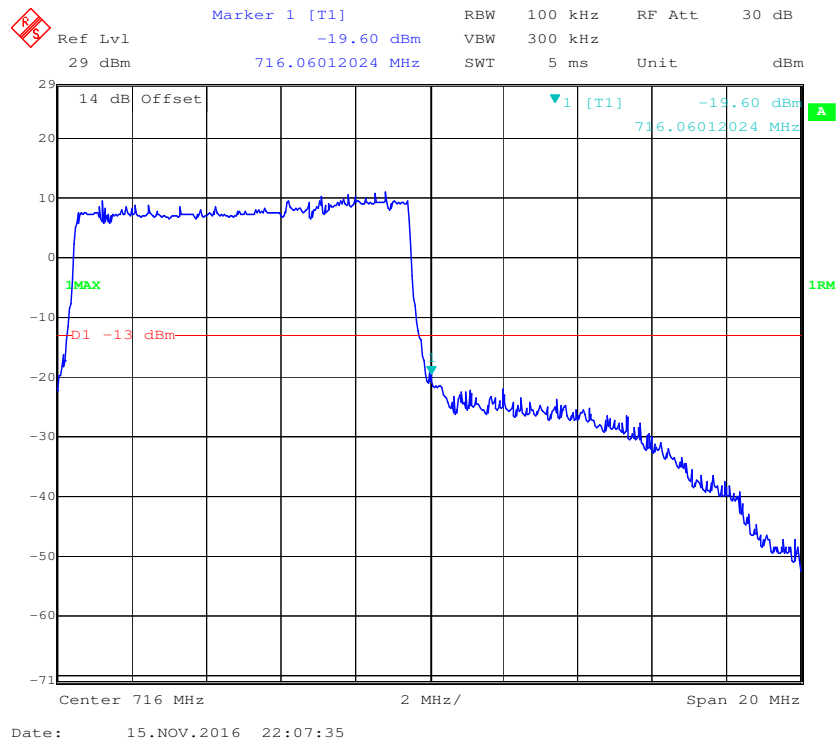

16-QAM (10.0 MHz, FULL RB) - Left Band Edge

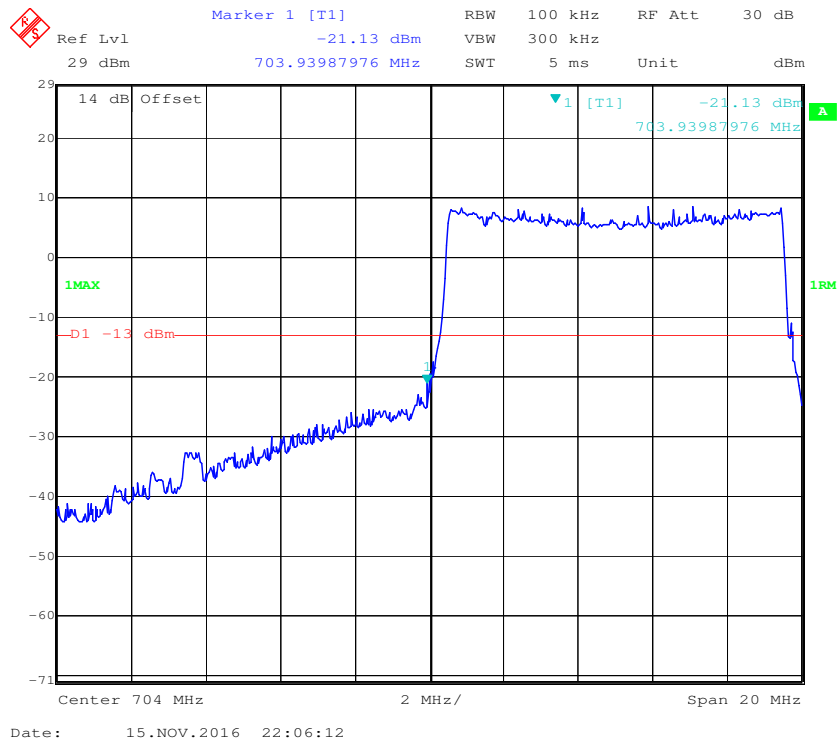

16-QAM (10.0 MHz, FULL RB) - Right Band Edge

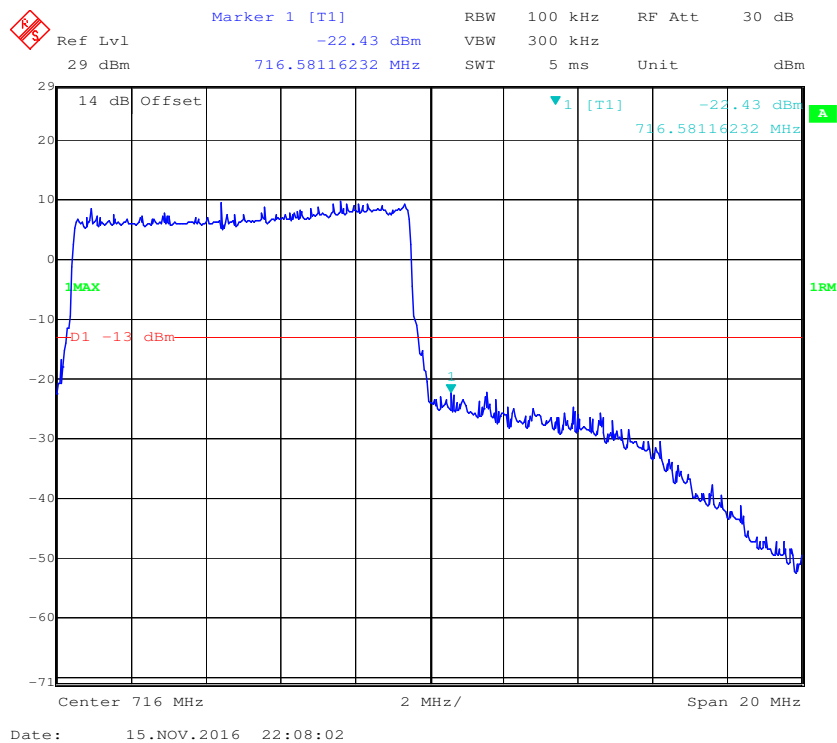

FCC § 2.1055; § 22.355; § 24.235; §27.54; - FREQUENCY STABILITY

Applicable Standards

FCC § 2.1055, §22.355, §24.235 and & §27.54.

According to FCC §2.1055, the frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

According to §22.355, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table below:

Frequency Tolerance for Transmitters in the Public Mobile Services

Frequency Range (MHz)	Base, fixed (ppm)	Mobile > 3 watts (ppm)	Mobile ≤ 3 watts (ppm)
25 to 50	20.0	20.0	50.0
50 to 450	5.0	5.0	50.0
450 to 512	2.5	5.0	5.0
821 to 896	1.5	2.5	2.5
928 to 929.	5.0	N/A	N/A
929 to 960.	1.5	N/A	N/A
2110 to 2220	10.0	N/A	N/A


According to §24.235, the frequency stability shall be sufficient to ensure that the fundamental emissions stays within the authorized frequency block.

Test Procedure

Frequency Stability vs. Temperature: The equipment under test was connected to an external DC power supply and the RF output was connected to communication test set via feed-through attenuators. The EUT was placed inside the temperature chamber. The DC leads and RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the communication test set.

Frequency Stability vs. Voltage: For hand carried, battery powered equipment; reduce primary supply voltage to the battery operating end point which shall be specified by the manufacturer.

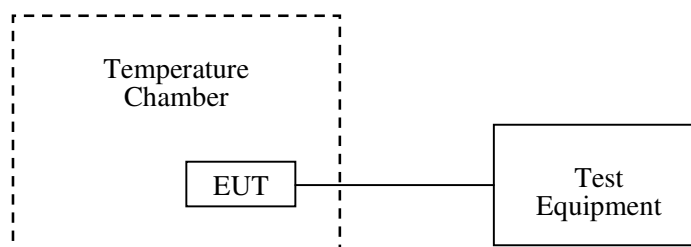

Test Data**Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	55 %
ATM Pressure:	101.0 kPa

The testing was performed by Peter Jiang on 2016-11-15.

EUT operation mode: Transmitting

Test Result: Compliance. Please refer to the following tables.

Cellular Band (Part 22H)**GSM Mode**

Middle Channel, $f_0=836.6$ MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-30	3.7	9	0.010758	2.5
-20		2	0.002391	2.5
-10		6	0.007172	2.5
0		5	0.005977	2.5
10		3	0.003586	2.5
20		1	0.001195	2.5
30		9	0.010758	2.5
40		1	0.001195	2.5
50		8	0.009563	2.5
20	V min.= 3.5	6	0.007172	2.5
	V max.= 4.2	3	0.003586	2.5

EDGE Mode

Middle Channel, $f_0=836.6$ MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-30	3.7	8	0.009563	2.5
-20		3	0.003586	2.5
-10		2	0.002391	2.5
0		7	0.008367	2.5
10		3	0.003586	2.5
20		-1	-0.001195	2.5
30		3	0.003586	2.5
40		9	0.010758	2.5
50		0	0.000000	2.5
20	V min.= 3.5	9	0.010758	2.5
	V max.= 4.2	6	0.007172	2.5

WCDMA Mode

Middle Channel, $f_0 = 836.6$ MHz				
Temperature (°C)	Power Supplied (V_{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-30	3.7	7	0.008367	2.5
-20		4	0.004781	2.5
-10		9	0.010758	2.5
0		3	0.003586	2.5
10		-1	-0.001195	2.5
20		-5	-0.005977	2.5
30		0	0.000000	2.5
40		3	0.003586	2.5
50		6	0.007172	2.5
20	V min.= 3.5	2	0.002391	2.5
	V max.= 4.2	0	0.000000	2.5

PCS Band (Part 24E)**GSM Mode**

Middle Channel, f_0 =1880.0 MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Result
-30	3.7	12	0.006383	pass
-20		16	0.008511	pass
-10		5	0.002660	pass
0		9	0.004787	pass
10		13	0.006915	pass
20		1	0.000532	pass
30		9	0.004787	pass
40		10	0.005319	pass
50		8	0.004255	pass
20	V min.= 3.5	11	0.005851	pass
	V max.= 4.2	6	0.003191	pass

EDGE Mode

Middle Channel, f_0 =1880.0 MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Result
-30	3.7	8	0.004255	pass
-20		6	0.003191	pass
-10		12	0.006383	pass
0		9	0.004787	pass
10		6	0.003191	pass
20		-3	-0.001596	pass
30		9	0.004787	pass
40		5	0.002660	pass
50		8	0.004255	pass
20	V min.= 3.5	11	0.005851	pass
	V max.= 4.2	6	0.003191	pass

WCDMA Mode

Middle Channel, f_0 = 1880.0 MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Result
-30	3.7	9	0.004787	pass
-20		5	0.002660	pass
-10		1	0.000532	pass
0		4	0.002128	pass
10		-1	-0.000532	pass
20		-3	-0.001596	pass
30		4	0.002128	pass
40		-2	-0.001064	pass
50		2	0.001064	pass
20	V min.= 3.5	7	0.003723	pass
	V max.= 4.2	9	0.004787	pass

Band 4:

20.0 MHz Middle Channel, f_0 = 1732.5 MHz (QPSK)				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Result
-30	3.7	-2	-0.00115	pass
-20		1	0.00058	pass
-10		4	0.00231	pass
0		-3	-0.00173	pass
10		-6	-0.00346	pass
20		5	0.00289	pass
30		2	0.00115	pass
40		-3	-0.00173	pass
50		4	0.00231	pass
25	V min.= 3.5	2	0.00115	pass
25	V max.= 4.2	1	0.00058	pass

Band 7:

20.0 MHz Middle Channel, $f_0=2535$ MHz (QPSK)				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Result
-30	3.7	5	0.00197	pass
-20		2	0.00079	pass
-10		5	0.00197	pass
0		7	0.00276	pass
10		4	0.00158	pass
20		6	0.00237	pass
30		1	0.00039	pass
40		5	0.00197	pass
50		3	0.00118	pass
25	V min.= 3.5	5	0.00197	pass
25	V max.= 4.2	6	0.00237	pass

Band 17:

10.0 MHz Middle Channel, $f_0=710$ MHz (QPSK)				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Result
-30	3.7	-1	-0.00141	pass
-20		2	0.00282	pass
-10		-7	-0.00986	pass
0		-7	-0.00986	pass
10		-4	-0.00563	pass
20		1	0.00141	pass
30		-5	-0.00704	pass
40		-2	-0.00282	pass
50		-6	-0.00845	pass
25	V min.= 3.5	-1	-0.00141	pass
25	V max.= 4.2	-3	-0.00423	pass

***** END OF REPORT *****