

FCC PART 22H, PART 24E  
TEST REPORT

For

**DDM Brands LLC**

1616 NW, 84<sup>TH</sup> Ave. Miami, Florida, U.S.A

**FCC ID: A4JWP47**

|                                        |                                                                                                                                                                                                                                                                                             |
|----------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Report Type:</b><br>Original Report | <b>Product Type:</b><br>3G Mobile Phone                                                                                                                                                                                                                                                     |
| <b>Test Engineer:</b> Haiguo Li        | <i>haiguo li</i>                                                                                                                                                                                                                                                                            |
| <b>Report Number:</b> RSZ140609004-00D |                                                                                                                                                                                                                                                                                             |
| <b>Report Date:</b> 2014-07-28         |                                                                                                                                                                                                                                                                                             |
| <b>Reviewed By:</b> RF Engineer        | <i>Jimmy xiao</i>                                                                                                                                                                                                                                                                           |
| <b>Prepared By:</b>                    | Bay Area Compliance Laboratories Corp. (Shenzhen)<br>6/F, the 3rd Phase of WanLi Industrial Building<br>ShiHua Road, FuTian Free Trade Zone<br>Shenzhen, Guangdong, China<br>Tel: +86-755-33320018<br>Fax: +86-755-33320008<br><a href="http://www.baclcorp.com.cn">www.baclcorp.com.cn</a> |

**Note:** This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp.

## **TABLE OF CONTENTS**

|                                                                                                 |           |
|-------------------------------------------------------------------------------------------------|-----------|
| <b>GENERAL INFORMATION.....</b>                                                                 | <b>4</b>  |
| PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....                                        | 4         |
| OBJECTIVE .....                                                                                 | 4         |
| RELATED SUBMITTAL(S)/GRANT(S).....                                                              | 4         |
| TEST METHODOLOGY .....                                                                          | 4         |
| TEST FACILITY .....                                                                             | 5         |
| <b>SYSTEM TEST CONFIGURATION.....</b>                                                           | <b>6</b>  |
| DESCRIPTION OF TEST CONFIGURATION .....                                                         | 6         |
| EQUIPMENT MODIFICATIONS .....                                                                   | 6         |
| SUPPORT EQUIPMENT LIST AND DETAILS .....                                                        | 6         |
| BLOCK DIAGRAM OF TEST SETUP .....                                                               | 6         |
| <b>SUMMARY OF TEST RESULTS .....</b>                                                            | <b>7</b>  |
| <b>FCC §1.1307 &amp; §2.1093 - RF EXPOSURE.....</b>                                             | <b>8</b>  |
| APPLICABLE STANDARD .....                                                                       | 8         |
| TEST RESULT .....                                                                               | 8         |
| <b>FCC §2.1047 - MODULATION CHARACTERISTIC .....</b>                                            | <b>9</b>  |
| <b>FCC § 2.1046, § 22.913 (A) &amp; § 24.232 (C) - RF OUTPUT POWER.....</b>                     | <b>10</b> |
| APPLICABLE STANDARD .....                                                                       | 10        |
| TEST PROCEDURE .....                                                                            | 10        |
| TEST EQUIPMENT LIST AND DETAILS.....                                                            | 10        |
| TEST DATA .....                                                                                 | 11        |
| <b>FCC §2.1049, §22.917, §22.905 &amp; §24.238 - BANDWIDTH .....</b>                            | <b>15</b> |
| APPLICABLE STANDARD .....                                                                       | 15        |
| TEST PROCEDURE .....                                                                            | 15        |
| TEST EQUIPMENT LIST AND DETAILS.....                                                            | 15        |
| TEST DATA .....                                                                                 | 15        |
| <b>FCC §2.1051, §22.917(A) &amp; §24.238(A) - SPURIOUS EMISSIONS AT ANTENNA TERMINALS .....</b> | <b>23</b> |
| APPLICABLE STANDARD .....                                                                       | 23        |
| TEST PROCEDURE .....                                                                            | 23        |
| TEST EQUIPMENT LIST AND DETAILS.....                                                            | 23        |
| TEST DATA .....                                                                                 | 23        |
| <b>FCC §2.1053, §22.917 &amp; §24.238 - SPURIOUS RADIATED EMISSIONS .....</b>                   | <b>29</b> |
| APPLICABLE STANDARD .....                                                                       | 29        |
| TEST PROCEDURE .....                                                                            | 29        |
| TEST EQUIPMENT LIST AND DETAILS.....                                                            | 29        |
| TEST DATA .....                                                                                 | 30        |
| <b>FCC §22.917(A) &amp; §24.238(A) - BAND EDGES.....</b>                                        | <b>32</b> |
| APPLICABLE STANDARD .....                                                                       | 32        |
| TEST PROCEDURE .....                                                                            | 32        |
| TEST EQUIPMENT LIST AND DETAILS.....                                                            | 32        |
| TEST DATA .....                                                                                 | 32        |
| <b>FCC §2.1055, §22.355 &amp; §24.235 - FREQUENCY STABILITY.....</b>                            | <b>40</b> |
| APPLICABLE STANDARD .....                                                                       | 40        |

TEST PROCEDURE .....40

TEST EQUIPMENT LIST AND DETAILS.....41

TEST DATA .....41

**PRODUCT SIMILARITY DECLARATION LETTER.....45**

## GENERAL INFORMATION

### Product Description for Equipment under Test (EUT)

The DDM Brands LLC's product, model number: YEZZ WP 47 (FCC ID: A4JWP47) or the "EUT" in this report was a 3G mobile phone, which was measured approximately: 136 mm (L) x 67 mm (W) x 7 mm (H), rated with input voltage: DC 3.8 V rechargeable Li-ion battery or DC 5.0V charging from adapter.

Adapter Information:

Model: Thrill 430x

Input: AC 110-220V, 50/60 Hz, 0.2A

Output: DC 5.0V, 1A

*Note: The model WP47, WP47B, MONACO 47 and BILLY 4.7 are electrically identical with the same PCB layout and schematic with the model: YEZZ WP 47 tested by BACL, the only difference is the model number for the purpose of market, the detailed information can be referred to the attached declaration letter that stated and guaranteed by the applicant.*

*\*All measurement and test data in this report was gathered from production sample serial number: 1406047 (Assigned by BACL, Shenzhen). The EUT supplied by the applicant was received on 2014-06-09.*

### Objective

This test report is prepared on behalf of DDM Brands LLC in accordance with Part 2-Subpart J, Part 22-Subpart H and Part 24-Subpart E of the Federal Communication Commissions rules.

The objective is to determine the compliance of the EUT with FCC rules for output power, modulation characteristic, occupied bandwidth, and spurious emission at antenna terminal, spurious radiated emission, frequency stability and band edge.

### Related Submittal(s)/Grant(s)

FCC Part 15.247 DSS, Part 15.247 DTS and Part 15B JBP submissions with FCC ID: A4JWP47.

### Test Methodology

All tests and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47 Part 2-Subpart J as well as the following parts:

Part 22 Subpart H - Public Mobile Services

Part 24 Subpart E - Personal Communication Services

Applicable Standards: TIA/EIA 603-D, ANSI C63.4-2009.

All radiated and conducted emissions measurements were performed at Bay Area Compliance Laboratories Corp. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement uncertainty with radiated emission is 5.91 dB for 30MHz-1GHz and 4.92 dB for above 1GHz, 1.95dB for conducted measurement.

## **Test Facility**

The test site used by Bay Area Compliance Laboratories Corp.(Shenzhen) to collect test data is located on the 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China.

Test site at Bay Area Compliance Laboratories Corp. (Shenzhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on December 06, 2010. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2009.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

## SYSTEM TEST CONFIGURATION

### Description of Test Configuration

The EUT was configured for testing according to TIA/EIA-603-D.

The final qualification test was performed with the EUT operating at normal mode.


### Equipment Modifications

No modification was made to the EUT.

### Support Equipment List and Details

| Manufacturer    | Description                          | Model  | Serial Number |
|-----------------|--------------------------------------|--------|---------------|
| Rohde & Schwarz | Universal Radio Communication Tester | CMU200 | 106891        |

### Block Diagram of Test Setup

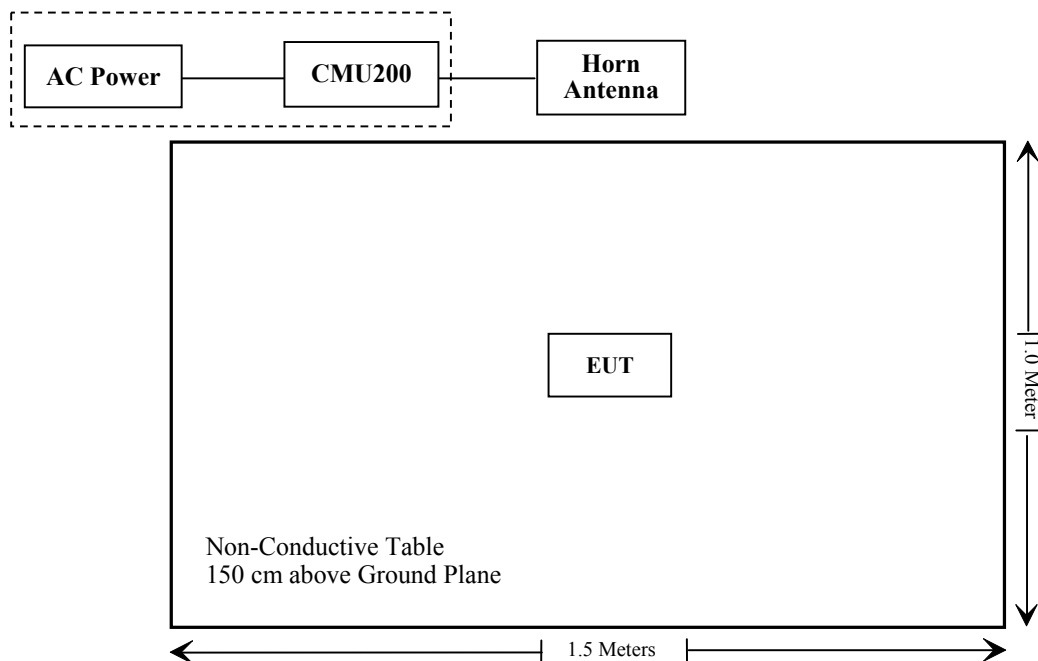

**SUMMARY OF TEST RESULTS**

| FCC Rules                                | Description of Test                                                    | Result         |
|------------------------------------------|------------------------------------------------------------------------|----------------|
| §1.1307, §2.1093                         | RF Exposure (SAR)                                                      | Compliance*    |
| §2.1046;<br>§ 22.913 (a); § 24.232 (c)   | RF Output Power                                                        | Compliance     |
| § 2.1047                                 | Modulation Characteristics                                             | Not Applicable |
| § 2.1049; § 22.905<br>§ 22.917; § 24.238 | Bandwidth                                                              | Compliance     |
| § 2.1051,<br>§ 22.917 (a); § 24.238 (a)  | Spurious Emissions at Antenna Terminal                                 | Compliance     |
| § 2.1053<br>§ 22.917 (a); § 24.238 (a)   | Field Strength of Spurious Radiation                                   | Compliance     |
| § 22.917 (a); § 24.238 (a)               | Out of band emission, Band Edge                                        | Compliance     |
| § 2.1055<br>§ 22.355; § 24.235           | Frequency stability vs. temperature<br>Frequency stability vs. voltage | Compliance     |

Note: \* Please refer to SAR report released by BACL, report number: RSZ140609004-20.

---

## **FCC §1.1307 & §2.1093 - RF EXPOSURE**

---

### **Applicable Standard**

FCC§1.1307 and §2.1093.

### **Test Result**

Compliance, please refer to the SAR report: RSZ140609004-20.



---

## **FCC §2.1047 - MODULATION CHARACTERISTIC**

---

According to FCC § 2.1047(d), Part 22H & 24E there is no specific requirement for digital modulation, therefore modulation characteristic is not presented.

## FCC § 2.1046, § 22.913 (a) & § 24.232 (c) - RF OUTPUT POWER

### Applicable Standard


According to FCC §2.1046 and §22.913 (a), the ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 watts.

According to FCC §2.1046 and §24.232 (C), mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications..

### Test Procedure

#### Conducted method:

The RF output of the transmitter was connected to the wireless test set and the spectrum analyzer through sufficient attenuation.



#### Radiated method:

TIA 603-D section 2.2.17

### Test Equipment List and Details

| Manufacturer    | Description                          | Model       | Serial Number | Calibration Date | Calibration Due Date |
|-----------------|--------------------------------------|-------------|---------------|------------------|----------------------|
| Sunol Sciences  | Horn Antenna                         | DRH-118     | A052304       | 2011-12-01       | 2014-11-30           |
| Rohde & Schwarz | Signal Analyzer                      | FSIQ26      | 8386001028    | 2013-11-12       | 2014-11-12           |
| Rohde & Schwarz | EMI Test Receiver                    | ESCI        | 101122        | 2013-09-25       | 2014-09-25           |
| Sunol Sciences  | Broadband Antenna                    | JB1         | A040904-2     | 2011-11-28       | 2014-11-27           |
| HP              | Signal Generator                     | 8341B       | 2624A00116    | 2014-06-03       | 2015-06-03           |
| COM POWER       | Dipole Antenna                       | AD-100      | 041000        | NCR              | NCR                  |
| A.H. System     | Horn Antenna                         | SAS-200/571 | 135           | 2012-02-11       | 2015-02-10           |
| Rohde & Schwarz | Universal Radio Communication Tester | CMU200      | 106891        | 2013-11-23       | 2014-11-23           |

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

**Test Data****Environmental Conditions**

|                           |           |
|---------------------------|-----------|
| <b>Temperature:</b>       | 27 °C     |
| <b>Relative Humidity:</b> | 55 %      |
| <b>ATM Pressure:</b>      | 101.0 kPa |

The testing was performed by Haiguo Li on 2014-07-19.

**Conducted Power****Cellular Band (Part 22H)**

| Mode | Channel | Frequency (MHz) | Peak Output Power (dBm) | Limit (dBm) |
|------|---------|-----------------|-------------------------|-------------|
| GSM  | 128     | 824.2           | 31.34                   | 38.45       |
|      | 190     | 836.6           | 31.30                   | 38.45       |
|      | 251     | 848.8           | 31.21                   | 38.45       |

| Mode | Channel | Frequency (MHz) | Peak Output Power (dBm) |         |         |         | Limit (dBm) |
|------|---------|-----------------|-------------------------|---------|---------|---------|-------------|
|      |         |                 | 1 slot                  | 2 slots | 3 slots | 4 slots |             |
| GPRS | 128     | 824.2           | 31.40                   | 30.70   | 29.25   | 27.87   | 38.45       |
|      | 190     | 836.6           | 31.32                   | 30.76   | 29.27   | 27.87   | 38.45       |
|      | 251     | 848.8           | 31.23                   | 30.59   | 29.24   | 27.92   | 38.45       |

| Mode | Channel | Frequency (MHz) | Peak Output Power (dBm) |         |         |         | Limit (dBm) |
|------|---------|-----------------|-------------------------|---------|---------|---------|-------------|
|      |         |                 | 1 slot                  | 2 slots | 3 slots | 4 slots |             |
| EDGE | 128     | 824.2           | 26.69                   | 26.03   | 25.28   | 24.46   | 38.45       |
|      | 190     | 836.6           | 26.74                   | 26.09   | 25.32   | 24.53   | 38.45       |
|      | 251     | 848.8           | 26.74                   | 26.13   | 25.32   | 24.51   | 38.45       |

| Mode           | Test Condition | Test Mode   | 3GPP Sub Test | Average Output Power (dBm) |                  |                |
|----------------|----------------|-------------|---------------|----------------------------|------------------|----------------|
|                |                |             |               | Low Frequency              | Middle Frequency | High Frequency |
| WCDMA (Band V) | Normal         | RMC12.2k    |               | 22.58                      | 22.22            | 22.80          |
|                |                | Rel 6 HSDPA | 1             | 21.50                      | 21.52            | 21.82          |
|                |                |             | 2             | 21.46                      | 21.49            | 21.73          |
|                |                |             | 3             | 21.62                      | 21.57            | 21.86          |
|                |                |             | 4             | 21.45                      | 21.40            | 21.73          |
|                |                | Rel 6 HSUPA | 1             | 21.35                      | 21.07            | 21.45          |
|                |                |             | 2             | 21.31                      | 20.97            | 21.33          |
|                |                |             | 3             | 21.44                      | 21.17            | 21.49          |
|                |                |             | 4             | 21.30                      | 21.03            | 21.37          |
|                |                |             | 5             | 21.48                      | 21.10            | 21.49          |

## PCS Band (Part 24E)

| Mode | Channel | Frequency (MHz) | Peak Output Power (dBm) | Limit (dBm) |
|------|---------|-----------------|-------------------------|-------------|
| GSM  | 512     | 1850.2          | 30.70                   | 33          |
|      | 661     | 1880.0          | 30.33                   | 33          |
|      | 810     | 1909.8          | 30.10                   | 33          |

| Mode | Channel | Frequency (MHz) | Peak Output Power (dBm) |         |         |         | Limit (dBm) |
|------|---------|-----------------|-------------------------|---------|---------|---------|-------------|
|      |         |                 | 1 slot                  | 2 slots | 3 slots | 4 slots |             |
| GPRS | 512     | 1850.2          | 30.83                   | 29.26   | 27.67   | 26.08   | 33          |
|      | 661     | 1880.0          | 30.56                   | 28.94   | 27.35   | 25.78   | 33          |
|      | 810     | 1909.8          | 30.45                   | 28.61   | 26.99   | 25.34   | 33          |

| Mode | Channel | Frequency (MHz) | Peak Output Power (dBm) |         |         |         | Limit (dBm) |
|------|---------|-----------------|-------------------------|---------|---------|---------|-------------|
|      |         |                 | 1 slot                  | 2 slots | 3 slots | 4 slots |             |
| EDGE | 512     | 1850.2          | 26.74                   | 25.91   | 25.10   | 23.39   | 33          |
|      | 661     | 1880.0          | 26.62                   | 25.84   | 24.95   | 23.23   | 33          |
|      | 810     | 1909.8          | 26.55                   | 25.81   | 25.03   | 23.18   | 33          |

| Mode            | Test Condition | Test Mode   | 3GPP Sub Test | Average Output Power (dBm) |                   |                |                      |              |                    |
|-----------------|----------------|-------------|---------------|----------------------------|-------------------|----------------|----------------------|--------------|--------------------|
|                 |                |             |               | Low Channel                | Low Channel (PAR) | Middle Channel | Middle Channel (PAR) | High Channel | High Channel (PAR) |
| WCDMA (Band II) | Normal         | RMC12.2k    |               | 22.32                      | 3.09              | 22.17          | 2.84                 | 21.93        | 2.93               |
|                 |                | Rel 6 HSDPA | 1             | 20.88                      | 4.04              | 20.59          | 3.75                 | 20.53        | 3.93               |
|                 |                |             | 2             | 20.76                      | 3.67              | 20.51          | 3.25                 | 20.42        | 2.85               |
|                 |                |             | 3             | 20.97                      | 3.40              | 20.67          | 3.55                 | 20.64        | 3.24               |
|                 |                |             | 4             | 20.82                      | 2.39              | 20.48          | 2.54                 | 20.42        | 2.99               |
|                 |                | Rel 6 HSUPA | 1             | 21.58                      | 2.74              | 21.47          | 2.83                 | 20.70        | 3.06               |
|                 |                |             | 2             | 21.53                      | 2.71              | 21.39          | 3.53                 | 20.63        | 3.25               |
|                 |                |             | 3             | 21.62                      | 3.49              | 21.59          | 3.08                 | 20.83        | 4.17               |
|                 |                |             | 4             | 21.51                      | 2.38              | 21.43          | 2.89                 | 20.65        | 3.42               |
|                 |                |             | 5             | 21.62                      | 2.37              | 21.58          | 2.78                 | 20.78        | 3.32               |

**Note: Peak-to-average ratio (PAR)<13dB**

**Radiated Power (Measured at Max. conducted power channel)**

**ERP & EIRP**

**GSM Mode:**

| Frequency<br>(MHz)                            | Receiver<br>Reading<br>(dBμV) | TurnTable<br>Angle<br>Degree | Rx Antenna    |                | Substituted            |                       |                         | Absolute<br>Level<br>(dBm) | FCC Part<br>22H/24E |                |
|-----------------------------------------------|-------------------------------|------------------------------|---------------|----------------|------------------------|-----------------------|-------------------------|----------------------------|---------------------|----------------|
|                                               |                               |                              | Height<br>(m) | Polar<br>(H/V) | S.G.<br>Level<br>(dBm) | Cable<br>loss<br>(dB) | Antenna<br>Gain<br>(dB) |                            | Limit<br>(dBm)      | Margin<br>(dB) |
| ERP for Cellular Band (Part 22H), Low Channel |                               |                              |               |                |                        |                       |                         |                            |                     |                |
| 824.2                                         | 95.00                         | 0                            | 1.8           | H              | 23.8                   | 0.69                  | 0                       | 23.11                      | 38.45               | 15.34          |
| 824.2                                         | 103.01                        | 258                          | 1.5           | V              | 31.0                   | 0.69                  | 0                       | 30.31                      | 38.45               | 8.14           |
| EIRP for PCS Band (Part 24E), Middle Channel  |                               |                              |               |                |                        |                       |                         |                            |                     |                |
| 1850.2                                        | 83.73                         | 279                          | 1.6           | H              | 12.0                   | 1.03                  | 9.4                     | 20.37                      | 33                  | 12.63          |
| 1850.2                                        | 92.50                         | 231                          | 1.4           | V              | 20.5                   | 1.03                  | 9.4                     | 28.87                      | 33                  | 4.13           |

**EDGE Mode:**

| Frequency<br>(MHz)                               | Receiver<br>Reading<br>(dBμV) | TurnTable<br>Angle<br>Degree | Rx Antenna    |                | Substituted            |                       |                         | Absolute<br>Level<br>(dBm) | FCC Part<br>22H/24E |                |
|--------------------------------------------------|-------------------------------|------------------------------|---------------|----------------|------------------------|-----------------------|-------------------------|----------------------------|---------------------|----------------|
|                                                  |                               |                              | Height<br>(m) | Polar<br>(H/V) | S.G.<br>Level<br>(dBm) | Cable<br>loss<br>(dB) | Antenna<br>Gain<br>(dB) |                            | Limit<br>(dBm)      | Margin<br>(dB) |
| ERP for Cellular Band (Part 22H), Middle Channel |                               |                              |               |                |                        |                       |                         |                            |                     |                |
| 836.6                                            | 89.50                         | 282                          | 1.8           | H              | 18.1                   | 0.69                  | 0                       | 17.41                      | 38.45               | 21.04          |
| 836.6                                            | 97.60                         | 320                          | 1.5           | V              | 25.3                   | 0.69                  | 0                       | 24.61                      | 38.45               | 13.84          |
| EIRP for PCS Band (Part 24E), Low Channel        |                               |                              |               |                |                        |                       |                         |                            |                     |                |
| 1850.2                                           | 85.45                         | 211                          | 1.7           | H              | 13.2                   | 1.03                  | 9.4                     | 21.57                      | 33                  | 11.43          |
| 1850.2                                           | 88.45                         | 300                          | 2.0           | V              | 16.5                   | 1.03                  | 9.4                     | 24.87                      | 33                  | 8.13           |

**WCDMA Mode:**

| Frequency<br>(MHz)                       | Receiver<br>Reading<br>(dBμV) | TurnTable<br>Angle<br>Degree | Rx Antenna    |                | Substituted            |                       |                         | Absolute<br>Level<br>(dBm) | FCC Part<br>22H/24E |                |
|------------------------------------------|-------------------------------|------------------------------|---------------|----------------|------------------------|-----------------------|-------------------------|----------------------------|---------------------|----------------|
|                                          |                               |                              | Height<br>(m) | Polar<br>(H/V) | S.G.<br>Level<br>(dBm) | Cable<br>loss<br>(dB) | Antenna<br>Gain<br>(dB) |                            | Limit<br>(dBm)      | Margin<br>(dB) |
| ERP for Band V (Part 22H), High Channel  |                               |                              |               |                |                        |                       |                         |                            |                     |                |
| 846.6                                    | 85.14                         | 306                          | 1.6           | H              | 13.4                   | 0.69                  | 0                       | 12.71                      | 38.45               | 25.74          |
| 846.6                                    | 91.66                         | 96                           | 1.5           | V              | 19.3                   | 0.69                  | 0                       | 18.61                      | 38.45               | 19.84          |
| EIRP for Band II (Part 24E), Low Channel |                               |                              |               |                |                        |                       |                         |                            |                     |                |
| 1852.4                                   | 81.73                         | 224                          | 1.2           | H              | 9.2                    | 1.03                  | 9.4                     | 17.57                      | 33                  | 15.43          |
| 1852.4                                   | 83.28                         | 58                           | 1.2           | V              | 11.1                   | 1.03                  | 9.4                     | 19.47                      | 33                  | 13.53          |

Note: all above data were tested with no amplifier.


**FCC §2.1049, §22.917, §22.905 & §24.238 - BANDWIDTH****Applicable Standard**

FCC §2.1049, §22.917, §22.905 and §24.238.

**Test Procedure**

The RF output of the transmitter was connected to the simulator and the spectrum analyzer through sufficient attenuation.

The resolution bandwidth of the spectrum analyzer was set at 5 kHz (Cellular /PCS) & 100 kHz (WCDMA) and the 26 dB & 99% bandwidth was recorded.

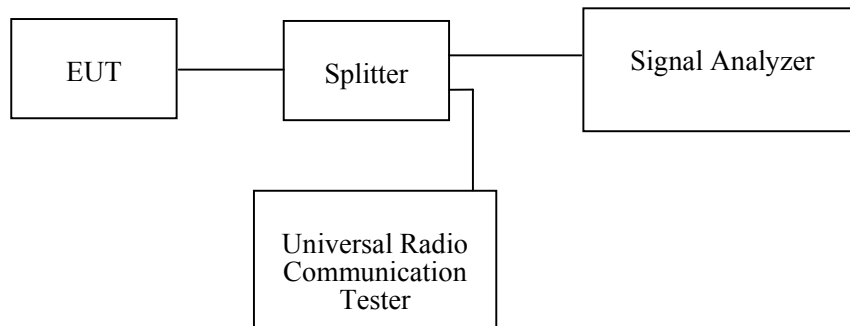**Test Equipment List and Details**

| Manufacturer    | Description                          | Model  | Serial Number | Calibration Date | Calibration Due Date |
|-----------------|--------------------------------------|--------|---------------|------------------|----------------------|
| Rohde & Schwarz | Signal Analyzer                      | FSIQ26 | 8386001028    | 2013-11-12       | 2014-11-12           |
| Rohde & Schwarz | Universal Radio Communication Tester | CMU200 | 106891        | 2013-11-23       | 2014-11-23           |

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

**Test Data****Environmental Conditions**

|                    |           |
|--------------------|-----------|
| Temperature:       | 26~28 °C  |
| Relative Humidity: | 57~58 %   |
| ATM Pressure:      | 101.0 kPa |

The testing was performed by Haiguo Li from 2014-06-20 to 2014-07-19.

EUT operation mode: Transmitting

Test Result: Compliance. Please refer to the following tables and plots.

Cellular Band (Part 22H)

| Mode       | Frequency (MHz) | 99% Occupied Bandwidth (kHz) | 26 dB Emission Bandwidth (kHz) |
|------------|-----------------|------------------------------|--------------------------------|
| GSM (GMSK) | 836.6           | 248.5                        | 324.6                          |

| Mode        | Frequency (MHz) | 99% Occupied Bandwidth (kHz) | 26 dB Emission Bandwidth (kHz) |
|-------------|-----------------|------------------------------|--------------------------------|
| EDGE (8PSK) | 836.6           | 248.5                        | 312.6                          |

| Mode         | Frequency (MHz) | 99% Occupied Bandwidth (MHz) | 26 dB Emission Bandwidth (MHz) |
|--------------|-----------------|------------------------------|--------------------------------|
| WCDMA (BPSK) | 836.6           | 4.168                        | 4.790                          |

| Mode          | Frequency (MHz) | 99% Occupied Bandwidth (MHz) | 26 dB Emission Bandwidth (MHz) |
|---------------|-----------------|------------------------------|--------------------------------|
| HSDPA (16QAM) | 836.6           | 4.168                        | 4.770                          |

| Mode         | Frequency (MHz) | 99% Occupied Bandwidth (MHz) | 26 dB Emission Bandwidth (MHz) |
|--------------|-----------------|------------------------------|--------------------------------|
| HSUPA (BPSK) | 836.6           | 4.168                        | 4.749                          |



## PCS Band (Part 24E)

| Mode       | Frequency (MHz) | 99% Occupied Bandwidth (kHz) | 26 dB Emission Bandwidth (kHz) |
|------------|-----------------|------------------------------|--------------------------------|
| GSM (GMSK) | 1880.0          | 244.5                        | 316.6                          |

| Mode        | Frequency (MHz) | 99% Occupied Bandwidth (kHz) | 26 dB Emission Bandwidth (kHz) |
|-------------|-----------------|------------------------------|--------------------------------|
| EDGE (8PSK) | 1880.0          | 248.5                        | 312.6                          |


| Mode         | Frequency (MHz) | 99% Occupied Bandwidth (MHz) | 26 dB Emission Bandwidth (MHz) |
|--------------|-----------------|------------------------------|--------------------------------|
| WCDMA (BPSK) | 1880.0          | 4.168                        | 4.770                          |

| Mode          | Frequency (MHz) | 99% Occupied Bandwidth (MHz) | 26 dB Emission Bandwidth (MHz) |
|---------------|-----------------|------------------------------|--------------------------------|
| HSDPA (16QAM) | 1880.0          | 4.168                        | 4.790                          |


| Mode         | Frequency (MHz) | 99% Occupied Bandwidth (MHz) | 26 dB Emission Bandwidth (MHz) |
|--------------|-----------------|------------------------------|--------------------------------|
| HSUPA (BPSK) | 1880.0          | 4.188                        | 4.770                          |

## Cellular Band (Part 22H)


## 99% Occupied &amp; 26 dB Emissions Bandwidth for GSM (GMSK) Mode

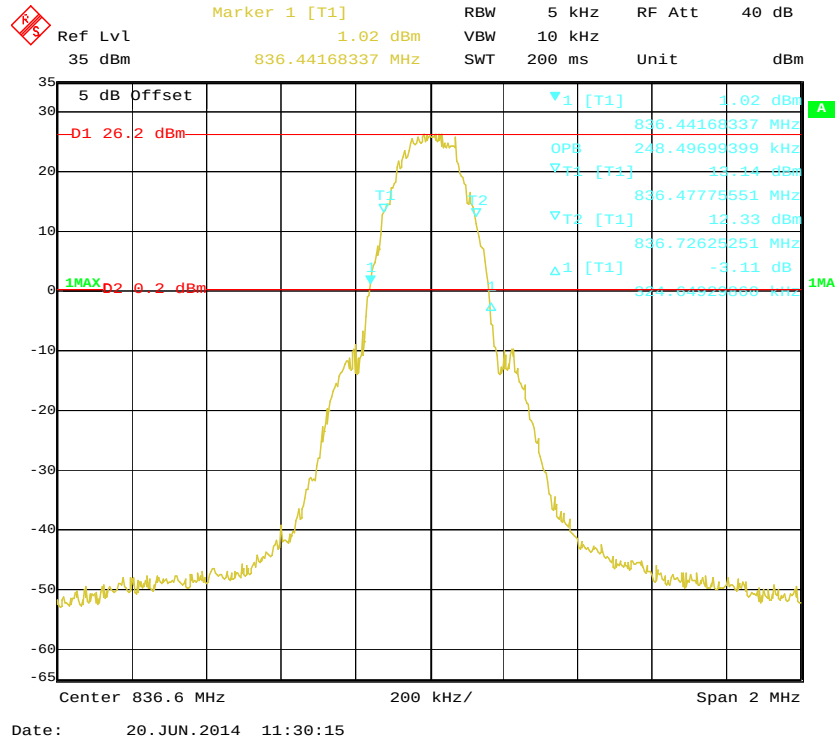


## 99% Occupied &amp; 26 dB Emissions Bandwidth for EDGE (8PSK) Mode


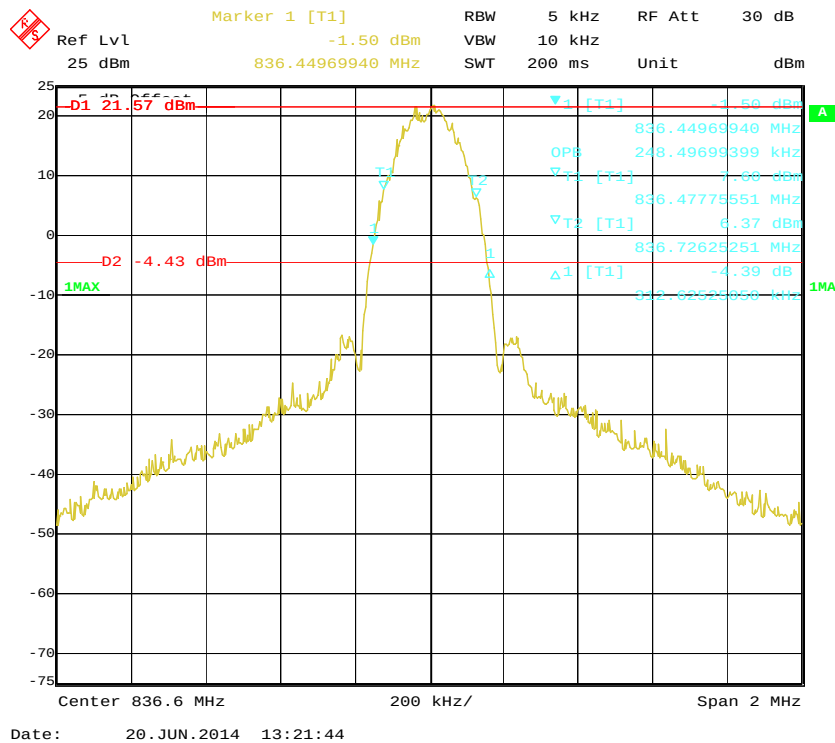




### 99% Occupied & 26 dB Emissions Bandwidth for WCDMA (BPSK) Mode

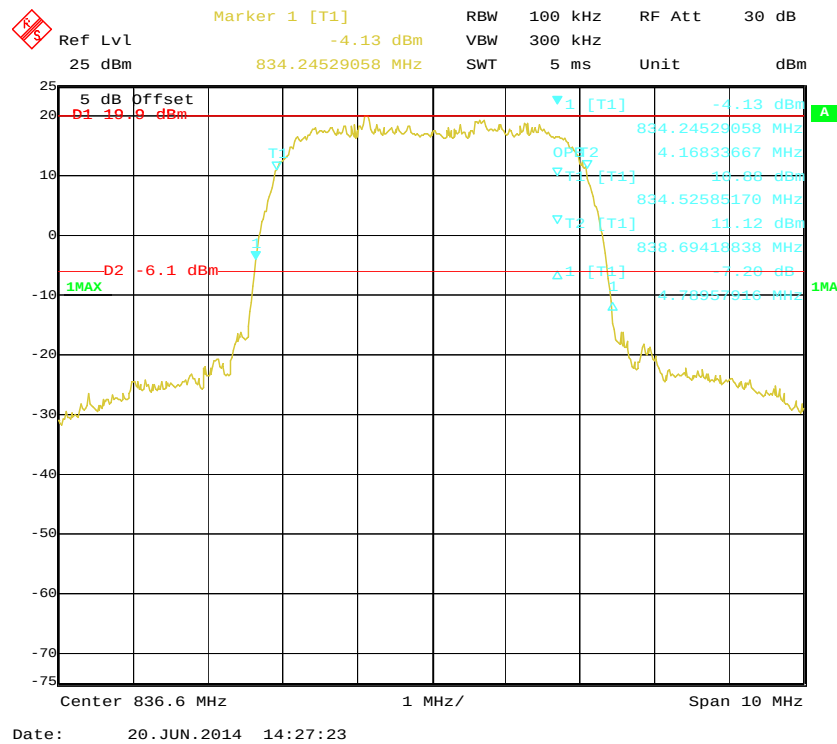


### 99% Occupied & 26 dB Emissions Bandwidth for HSDPA (16QAM) Mode

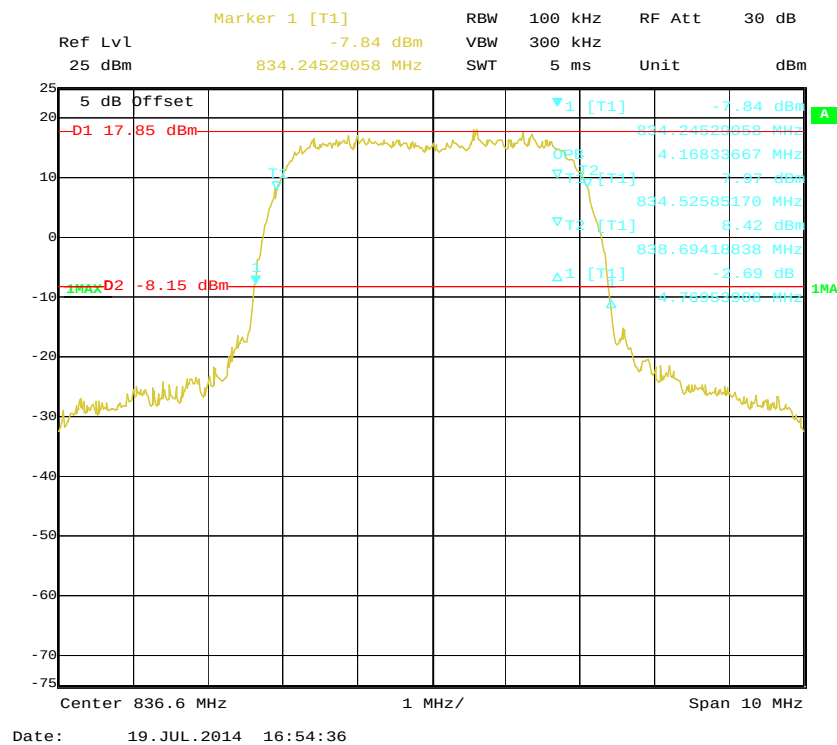

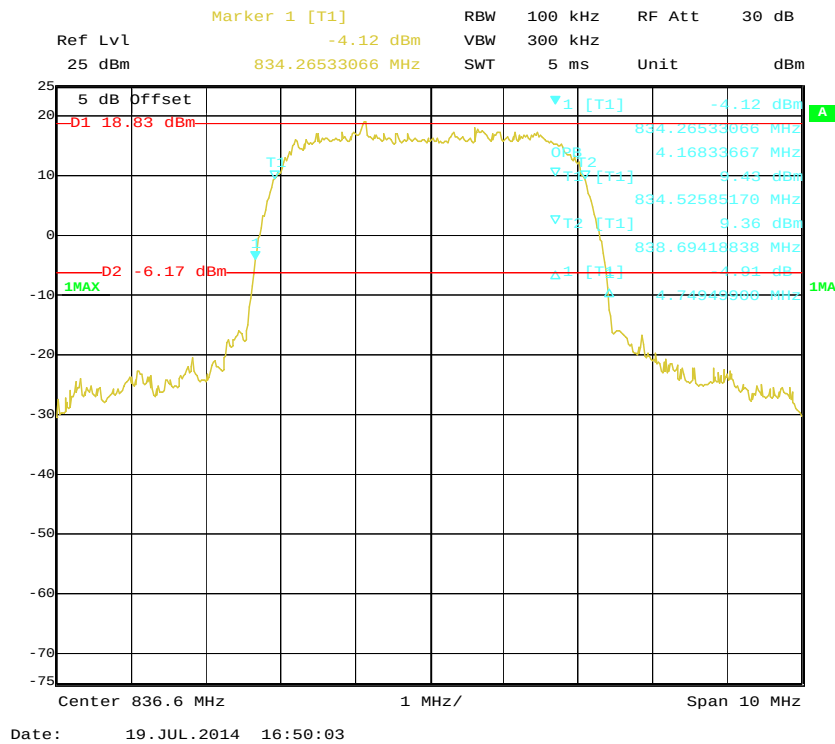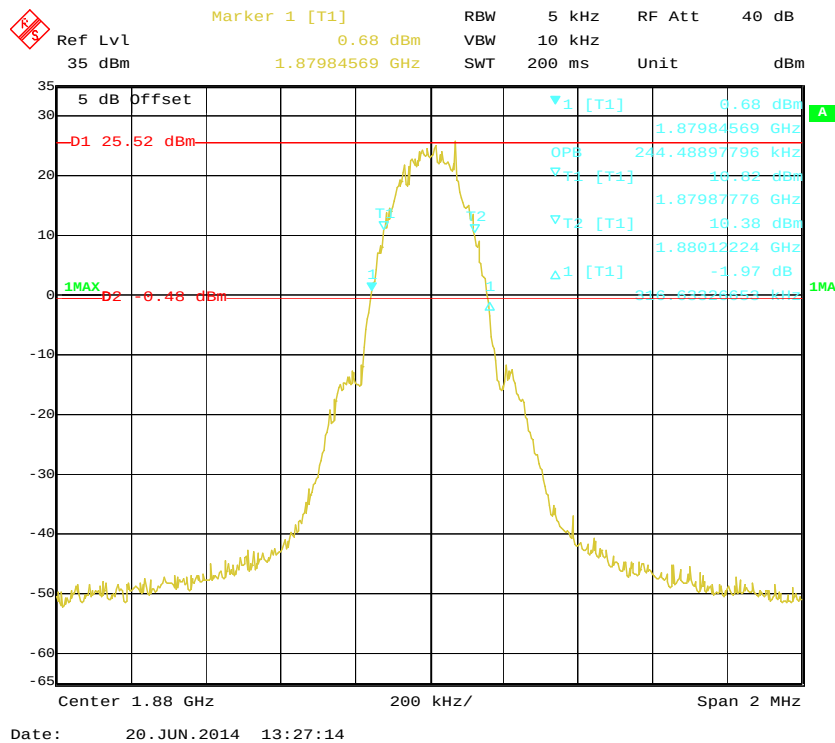
**99% Occupied & 26 dB Emissions Bandwidth for HSUPA (BPSK) Mode****PCS Band (Part 24E)****99% Occupied & 26 dB Emissions Bandwidth for GSM (GMSK) Mode**

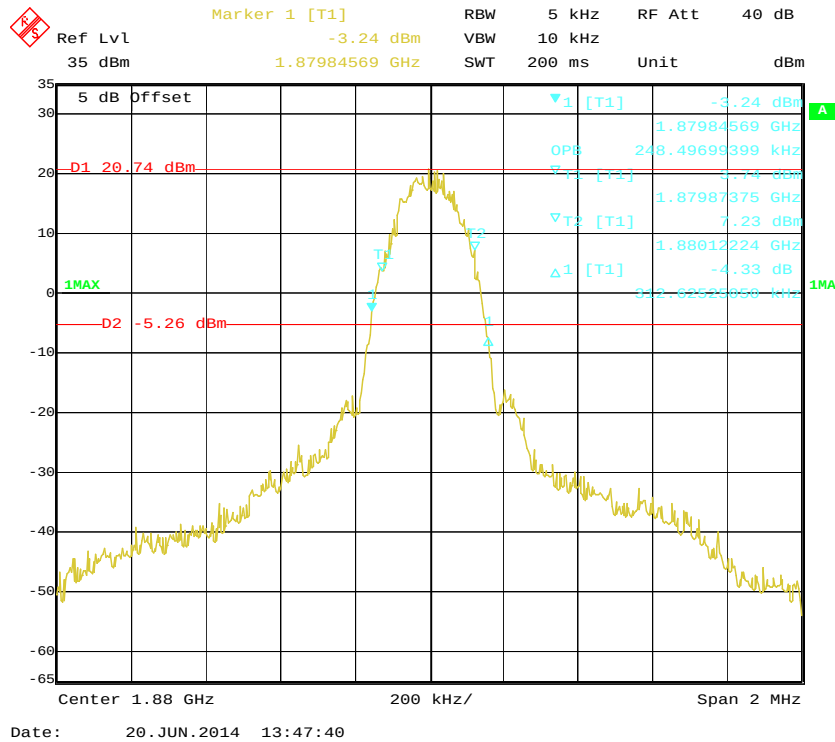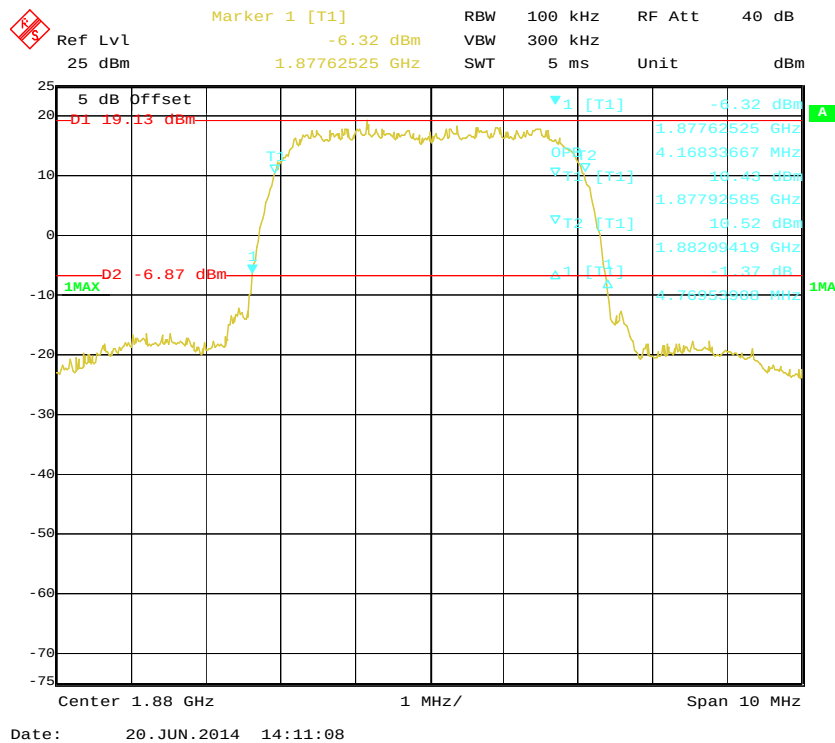**99% Occupied & 26 dB Emissions Bandwidth for EDGE (8PSK) Mode****99% Occupied & 26 dB Emissions Bandwidth for WCDMA (BPSK) Mode**

## 99% Occupied &amp; 26 dB Emissions Bandwidth for HSDPA (16QAM) Mode

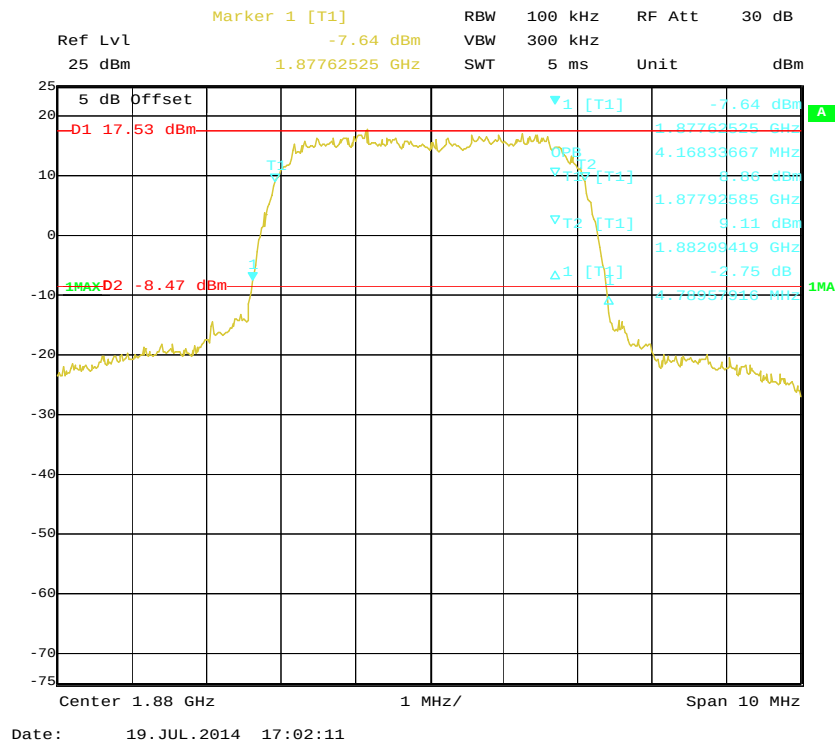

## 99% Occupied &amp; 26 dB Emissions Bandwidth for HSUPA (BPSK) Mode

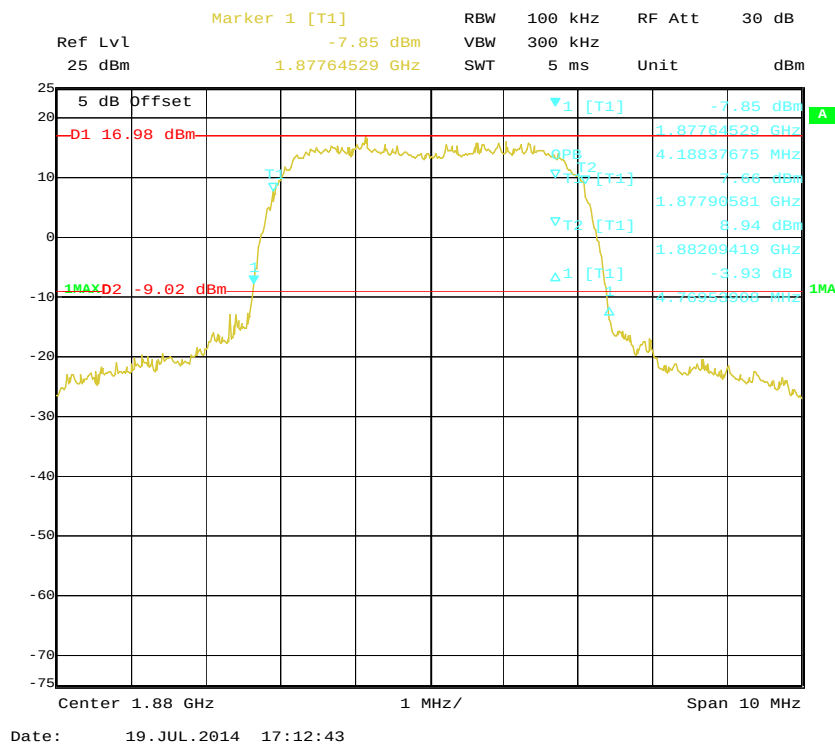

## FCC §2.1051, §22.917(a) & §24.238(a) - SPURIOUS EMISSIONS AT ANTENNA TERMINALS


### Applicable Standard

FCC §2.1051, §22.917(a) and §24.238(a).

The spectrum was to be investigated to the tenth harmonics of the highest fundamental frequency as specified in § 2.1051.

### Test Procedure

The RF output of the transceiver was connected to a spectrum analyzer and simulator through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set to appropriate value. Sufficient scans were taken to show any out of band emissions up to 10<sup>th</sup> harmonic.

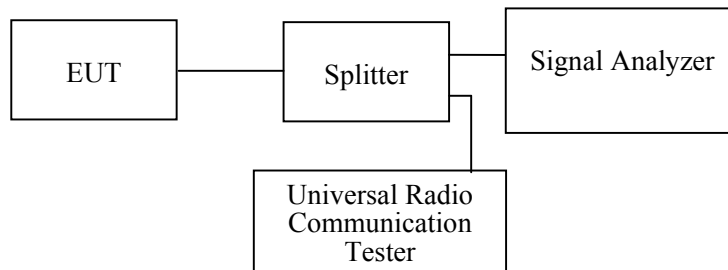

### Test Equipment List and Details

| Manufacturer    | Description                          | Model  | Serial Number | Calibration Date | Calibration Due Date |
|-----------------|--------------------------------------|--------|---------------|------------------|----------------------|
| Rohde & Schwarz | Signal Analyzer                      | FSIQ26 | 8386001028    | 2013-11-12       | 2014-11-12           |
| Rohde & Schwarz | Universal Radio Communication Tester | CMU200 | 106891        | 2013-11-23       | 2014-11-23           |

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

### Test Data

#### Environmental Conditions

|                    |           |
|--------------------|-----------|
| Temperature:       | 26 °C     |
| Relative Humidity: | 57 %      |
| ATM Pressure:      | 101.0 kPa |

The testing was performed by Haiguo Li on 2014-06-20.


Test result: Compliance, please refer to the following plots.

## Cellular Band (Part 22H)

## 30 MHz – 1 GHz (GSM Mode)




## 1 GHz – 10 GHz (GSM Mode)

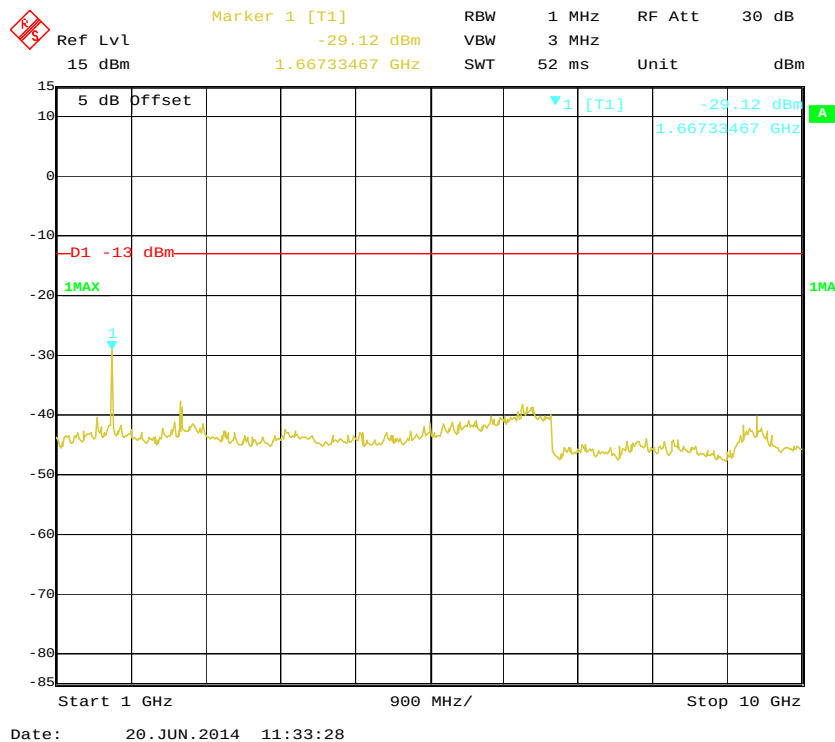




### 30 MHz – 1 GHz (WCDMA Mode)

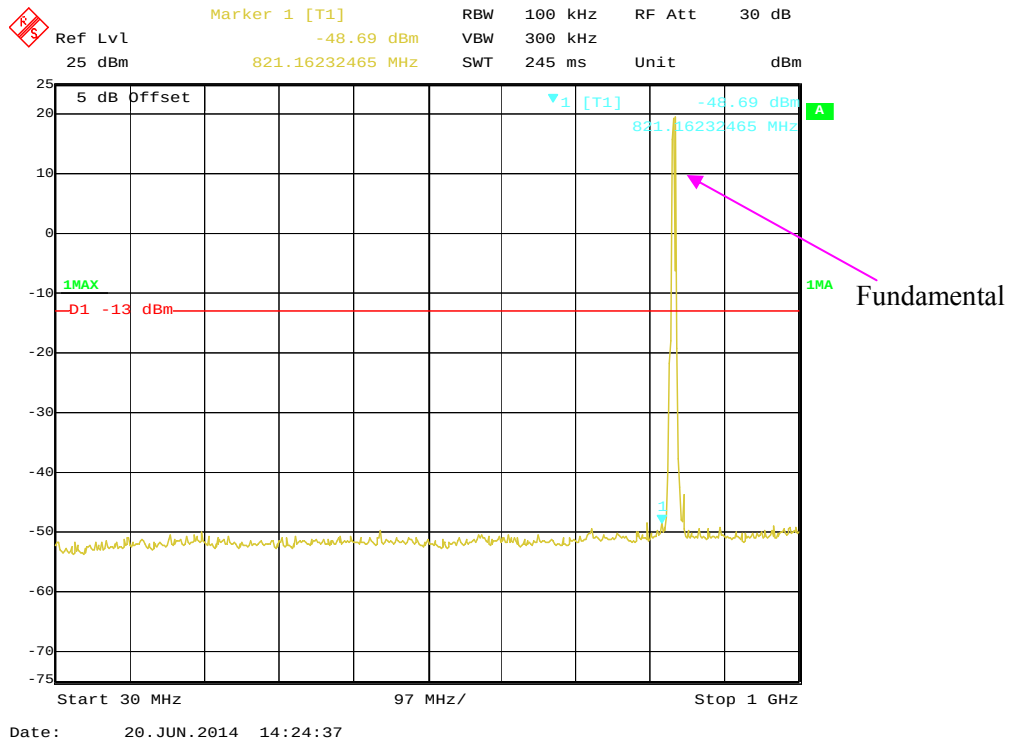


### 1 GHz – 10 GHz (WCDMA Mode)

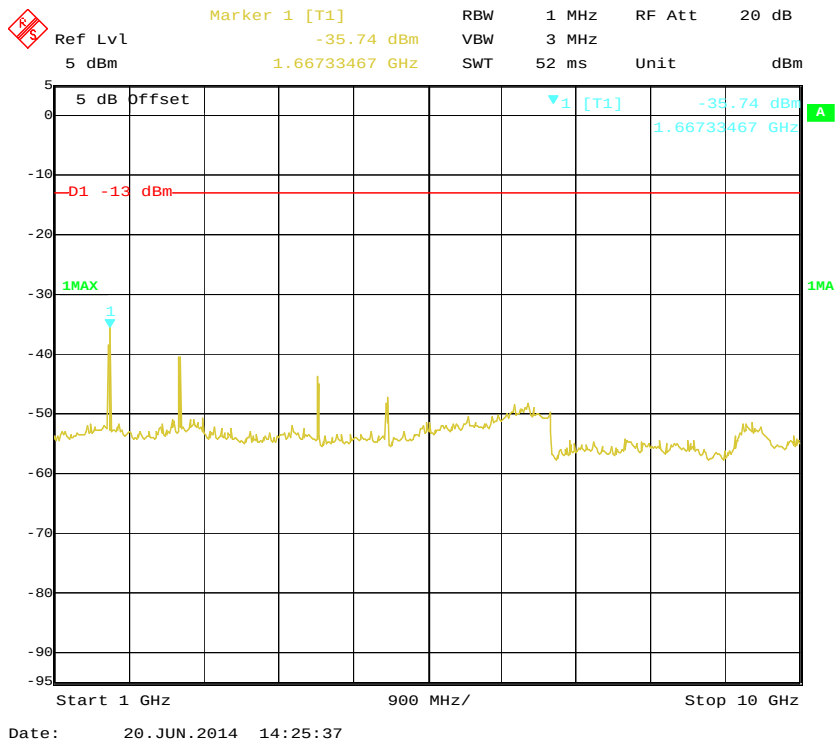


## PCS Band (Part 24E)


## 30 MHz – 1 GHz (GSM Mode)

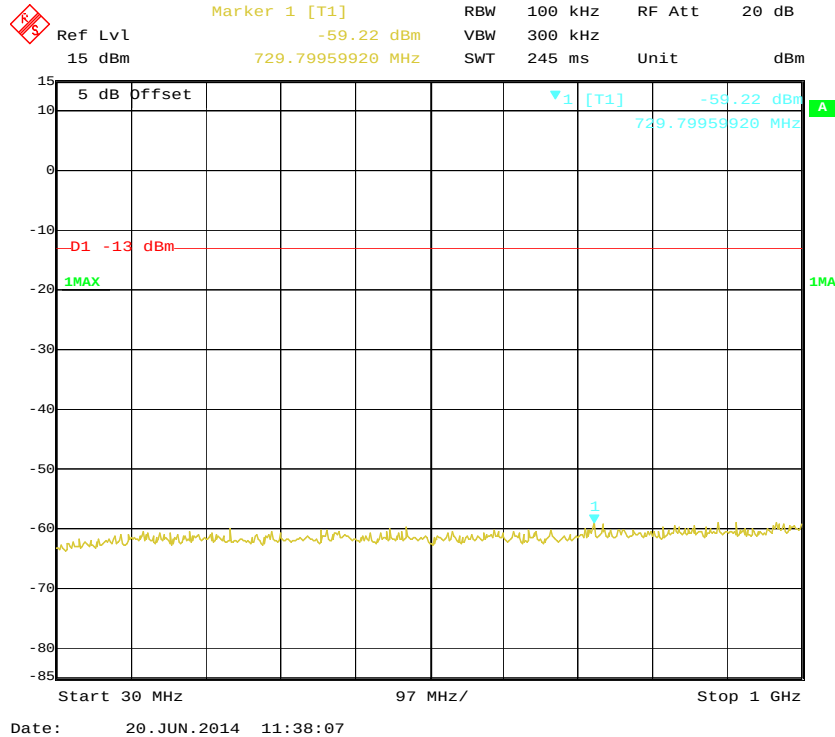


## 1 GHz – 2 GHz (GSM Mode)

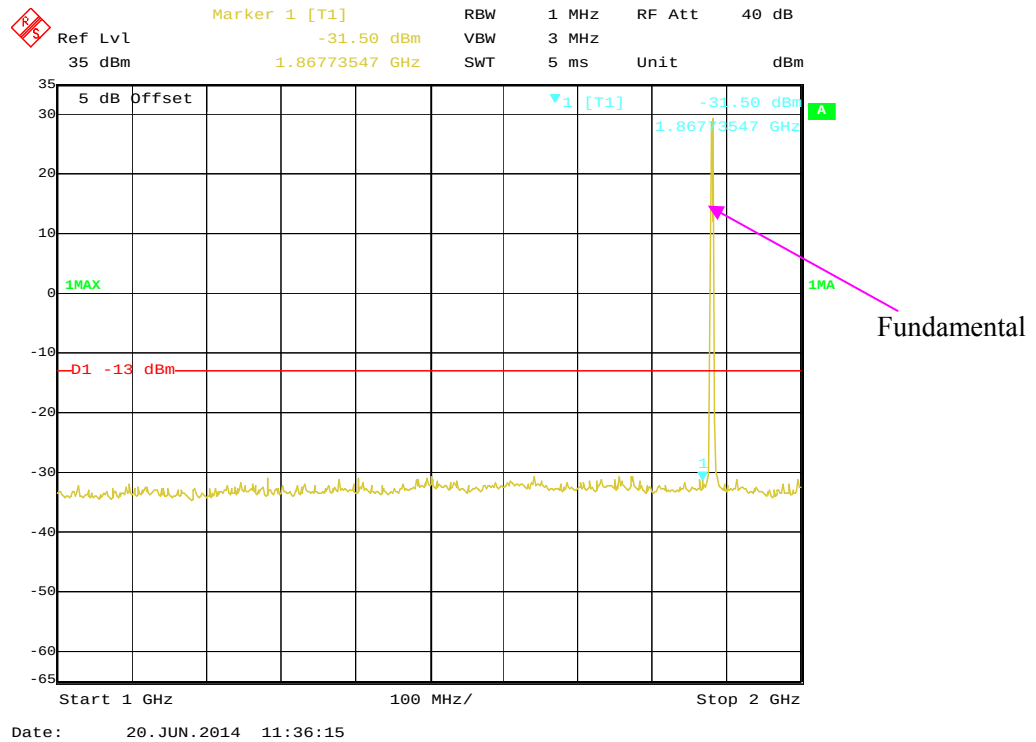


### 2 GHz – 20 GHz (GSM Mode)

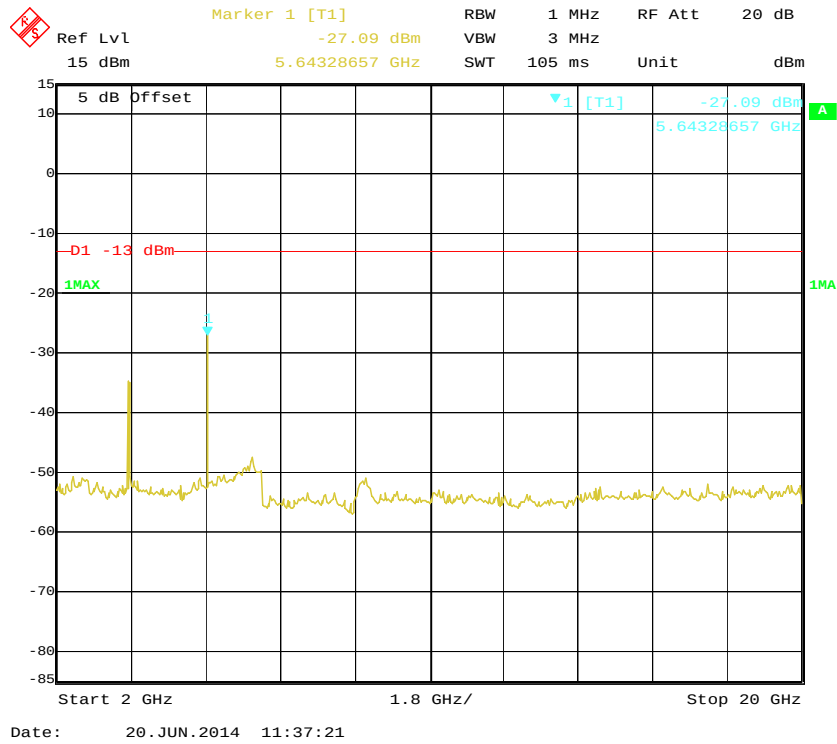


### 30 MHz – 1 GHz (WCDMA Mode)

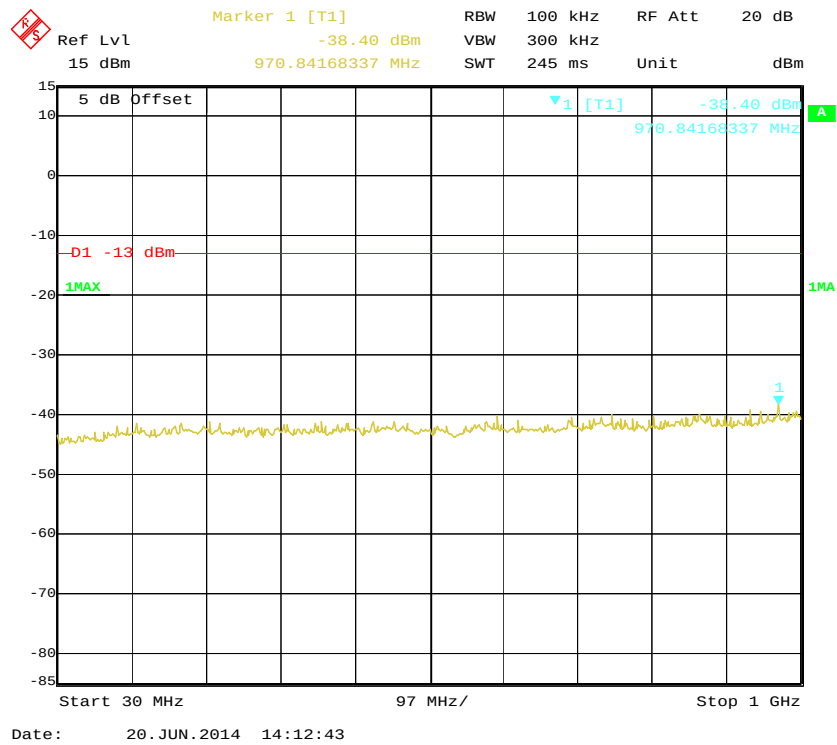

### 1 GHz – 2 GHz (WCDMA Mode)

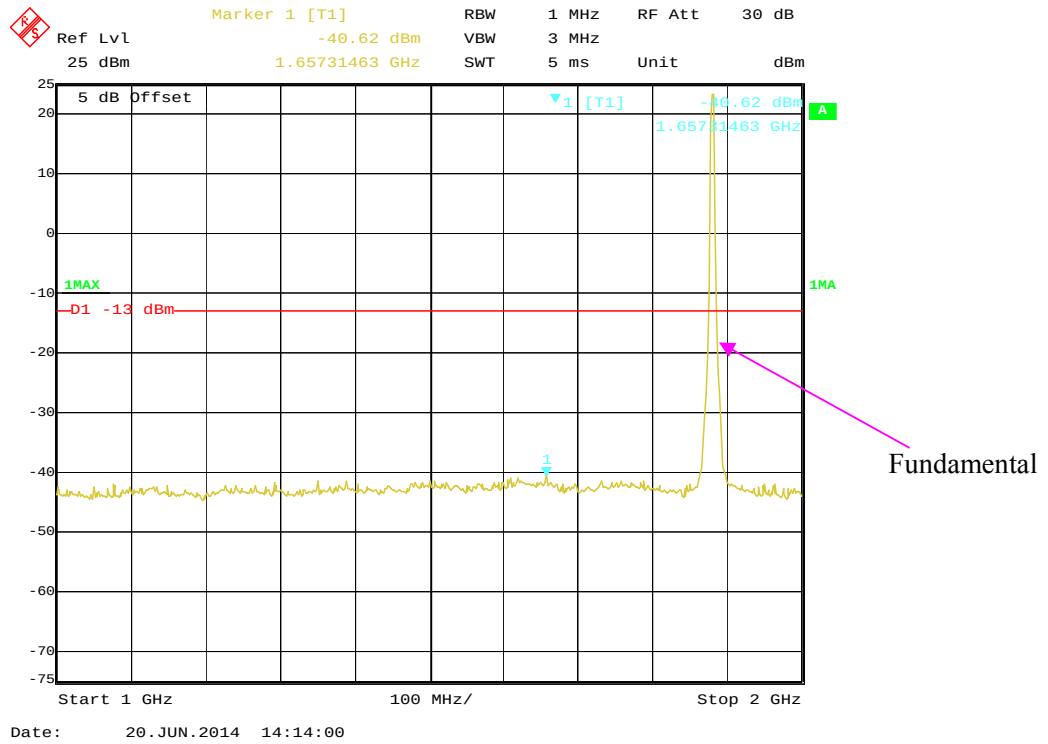

### 2 GHz – 20 GHz (WCDMA Mode)

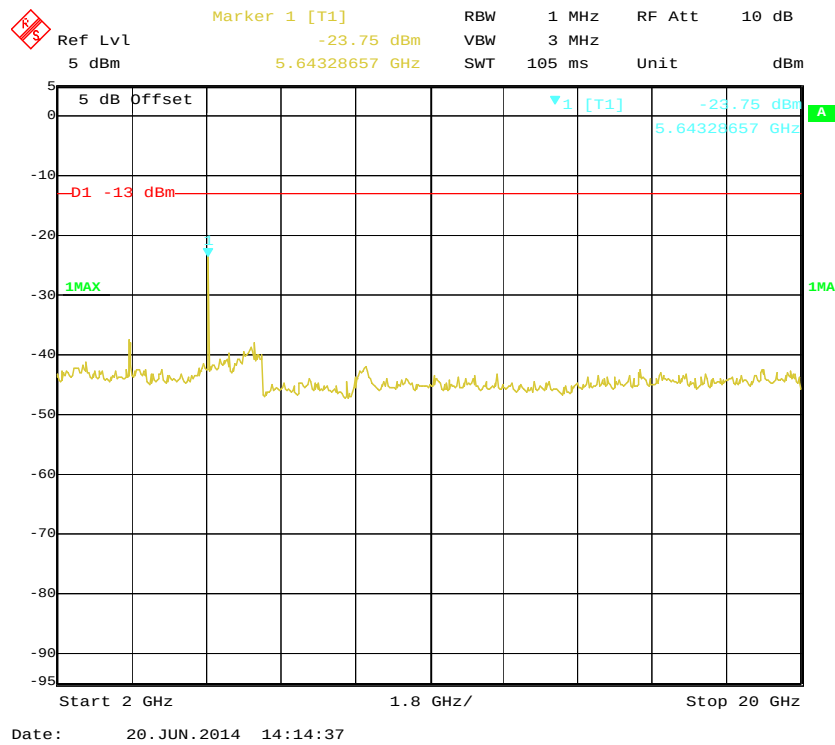

## FCC §2.1053, §22.917 & §24.238 - SPURIOUS RADIATED EMISSIONS

### Applicable Standard

FCC § 2.1053, §22.917 and § 24.238.

### Test Procedure

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the receiving antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to tenth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in dB = 10 lg (TXpwr in Watts/0.001) – the absolute level

Spurious attenuation limit in dB = 43 + 10 Log<sub>10</sub> (power out in Watts)

### Test Equipment List and Details

| Manufacturer      | Description                          | Model       | Serial Number | Calibration Date | Calibration Due Date |
|-------------------|--------------------------------------|-------------|---------------|------------------|----------------------|
| Sunol Sciences    | Horn Antenna                         | DRH-118     | A052304       | 2011-12-01       | 2014-11-30           |
| Sunol Sciences    | Broadband Antenna                    | JB1         | A040904-2     | 2011-11-28       | 2014-11-27           |
| Rohde & Schwarz   | Signal Analyzer                      | FSIQ26      | 8386001028    | 2013-11-12       | 2014-11-12           |
| Rohde & Schwarz   | EMI Test Receiver                    | ESCI        | 101122        | 2013-09-25       | 2014-09-25           |
| Mini              | Pre-amplifier                        | ZVA-183-S+  | 5969001149    | 2014-04-23       | 2015-04-23           |
| HP                | Amplifier                            | 8447E       | 1937A01046    | 2014-05-06       | 2015-05-06           |
| HP                | Signal Generator                     | 8341B       | 2624A00116    | 2014-06-03       | 2015-06-03           |
| COM POWER         | Dipole Antenna                       | AD-100      | 041000        | NCR              | NCR                  |
| A.H. System       | Horn Antenna                         | SAS-200/571 | 135           | 2012-02-11       | 2015-02-10           |
| Electro-Mechanics | Horn Antenna                         | 3116        | 9510-2270     | 2013-10-14       | 2016-10-13           |
| Rohde & Schwarz   | Universal Radio Communication Tester | CMU200      | 106891        | 2013-11-23       | 2014-11-23           |

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

**Test Data****Environmental Conditions**

|                           |           |
|---------------------------|-----------|
| <b>Temperature:</b>       | 26 °C     |
| <b>Relative Humidity:</b> | 58 %      |
| <b>ATM Pressure:</b>      | 101.0 kPa |

The testing was performed by Haiguo Li on 2014-06-19.

EUT operation mode: Transmitting (worst case)

**30 MHz ~ 10 GHz:**

**Cellular Band (Part 22H)**

| Frequency<br>(MHz)       | Receiver<br>Reading<br>(dBμV) | Turntable<br>Angle<br>Degree | Rx Antenna    |                | Substituted          |                       |                         | Absolute<br>Level<br>(dBm) | FCC Part 22H   |                |
|--------------------------|-------------------------------|------------------------------|---------------|----------------|----------------------|-----------------------|-------------------------|----------------------------|----------------|----------------|
|                          |                               |                              | Height<br>(m) | Polar<br>(H/V) | SG<br>Level<br>(dBm) | Cable<br>Loss<br>(dB) | Antenna<br>Gain<br>(dB) |                            | Limit<br>(dBm) | Margin<br>(dB) |
| GSM Mode, Middle channel |                               |                              |               |                |                      |                       |                         |                            |                |                |
| 254.2                    | 30.04                         | 358                          | 1.2           | H              | -67.0                | 0.32                  | 0                       | -67.32                     | -13            | 54.32          |
| 254.2                    | 30.89                         | 30                           | 1.8           | V              | -66.1                | 0.32                  | 0                       | -66.42                     | -13            | 53.42          |
| 1673.2                   | 52.17                         | 144                          | 1.6           | H              | -50.9                | 0.97                  | 9.40                    | -42.47                     | -13            | 29.47          |
| 1673.2                   | 60.08                         | 60                           | 1.4           | V              | -40.4                | 0.97                  | 9.40                    | -31.97                     | -13            | 18.97          |
| 2509.8                   | 55.73                         | 338                          | 1.8           | H              | -45.0                | 1.46                  | 10.70                   | -35.76                     | -13            | 22.76          |
| 2509.8                   | 56.67                         | 175                          | 2.2           | V              | -39.7                | 1.46                  | 10.70                   | -30.46                     | -13            | 17.46          |
| 3346.4                   | 36.42                         | 307                          | 1.6           | H              | -58.0                | 2.08                  | 10.80                   | -49.28                     | -13            | 36.28          |
| 3346.4                   | 36.73                         | 270                          | 1.7           | V              | -56.8                | 2.08                  | 10.80                   | -48.08                     | -13            | 35.08          |
| WCDMA Mode, Low channel  |                               |                              |               |                |                      |                       |                         |                            |                |                |
| 251.15                   | 40.25                         | 229                          | 2.4           | H              | -56.7                | 0.32                  | 0                       | -57.02                     | -13            | 44.02          |
| 251.15                   | 41.34                         | 61                           | 2.4           | V              | -55.7                | 0.32                  | 0                       | -56.02                     | -13            | 43.02          |
| 1652.80                  | 58.67                         | 162                          | 2.0           | H              | -44.4                | 0.97                  | 9.40                    | -35.97                     | -13            | 22.97          |
| 1652.80                  | 60.25                         | 133                          | 1.5           | V              | -40.2                | 0.97                  | 9.40                    | -31.77                     | -13            | 18.77          |
| 2479.20                  | 42.66                         | 25                           | 1.2           | H              | -58.1                | 1.46                  | 10.70                   | -48.86                     | -13            | 35.86          |
| 2479.20                  | 43.52                         | 80                           | 1.3           | V              | -52.8                | 1.46                  | 10.70                   | -43.56                     | -13            | 30.56          |
| 3305.60                  | 45.21                         | 41                           | 1.6           | H              | -49.2                | 2.08                  | 10.80                   | -40.48                     | -13            | 27.48          |
| 3305.60                  | 45.73                         | 122                          | 1.5           | V              | -47.8                | 2.08                  | 10.80                   | -39.08                     | -13            | 26.08          |

**30 MHz ~ 20 GHz:****PCS Band (Part 24E)**

| Frequency<br>(MHz)         | Receiver<br>Reading<br>(dBμV) | Turntable<br>Angle<br>Degree | Rx Antenna    |                | Substituted          |                       |                         | Absolute<br>Level<br>(dBm) | FCC Part 24E   |                |
|----------------------------|-------------------------------|------------------------------|---------------|----------------|----------------------|-----------------------|-------------------------|----------------------------|----------------|----------------|
|                            |                               |                              | Height<br>(m) | Polar<br>(H/V) | SG<br>Level<br>(dBm) | Cable<br>Loss<br>(dB) | Antenna<br>Gain<br>(dB) |                            | Limit<br>(dBm) | Margin<br>(dB) |
| GSM Mode, Middle channel   |                               |                              |               |                |                      |                       |                         |                            |                |                |
| 254.2                      | 31.14                         | 15                           | 2.4           | H              | -65.9                | 0.32                  | 0                       | -66.22                     | -13            | 53.22          |
| 254.2                      | 31.12                         | 247                          | 1.5           | V              | -65.9                | 0.32                  | 0                       | -66.22                     | -13            | 53.22          |
| 5640.0                     | 44.25                         | 283                          | 2.1           | H              | -48.4                | 3.94                  | 11.70                   | -40.64                     | -13            | 27.64          |
| 5640.0                     | 45.11                         | 190                          | 1.7           | V              | -45.0                | 3.94                  | 11.70                   | -37.24                     | -13            | 24.24          |
| WCDMA Mode, Middle channel |                               |                              |               |                |                      |                       |                         |                            |                |                |
| 251.15                     | 40.65                         | 195                          | 2.1           | H              | -56.3                | 0.32                  | 0                       | -56.62                     | -13            | 43.62          |
| 251.15                     | 41.18                         | 133                          | 1.9           | V              | -55.8                | 0.32                  | 0                       | -56.12                     | -13            | 43.12          |
| 3760.00                    | 38.42                         | 78                           | 1.1           | H              | -49.5                | 2.96                  | 10.40                   | -42.06                     | -13            | 29.06          |
| 3760.00                    | 37.97                         | 63                           | 1.6           | V              | -49.3                | 2.96                  | 10.40                   | -41.86                     | -13            | 28.86          |

Note:

1) Absolute Level = SG Level - Cable loss + Antenna Gain

2) Margin = Limit- Absolute Level

## FCC §22.917(a) & §24.238(a) - BAND EDGES

### Applicable Standard


According to § 22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

According to §24.238(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

### Test Procedure

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

The center of the spectrum analyzer was set to block edge frequency

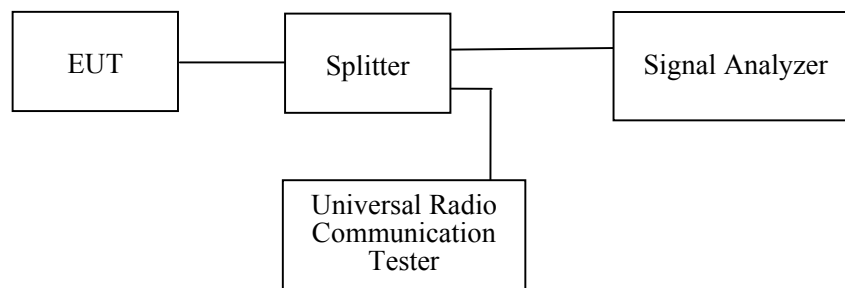

### Test Equipment List and Details

| Manufacturer    | Description                          | Model  | Serial Number | Calibration Date | Calibration Due Date |
|-----------------|--------------------------------------|--------|---------------|------------------|----------------------|
| Rohde & Schwarz | Signal Analyzer                      | FSIQ26 | 8386001028    | 2013-11-12       | 2014-11-12           |
| Rohde & Schwarz | Universal Radio Communication Tester | CMU200 | 106891        | 2013-11-23       | 2014-11-23           |

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

### Test Data

#### Environmental Conditions

|                    |           |
|--------------------|-----------|
| Temperature:       | 26-28 °C  |
| Relative Humidity: | 56-57 %   |
| ATM Pressure:      | 101.0 kPa |

The testing was performed by Haiguo Li from 2014-06-20 to 2014-07-19.

EUT operation mode: Transmitting



Test Result: Compliance. Please refer to the following tables and plots.

#### Cellular Band (Part 22H)

| Mode       | Band Edge | Emission (dBm) | Limit (dBm) |
|------------|-----------|----------------|-------------|
| GSM (GMSK) | Left      | -15.08         | $\leq -13$  |
|            | Right     | -13.98         | $\leq -13$  |

| Mode        | Band Edge | Emission (dBm) | Limit (dBm) |
|-------------|-----------|----------------|-------------|
| EDGE (8PSK) | Left      | -20.50         | $\leq -13$  |
|             | Right     | -22.13         | $\leq -13$  |

| Mode         | Band Edge | Emission (dBm) | Limit (dBm) |
|--------------|-----------|----------------|-------------|
| WCDMA (BPSK) | Left      | -14.16         | $\leq -13$  |
|              | Right     | -15.41         | $\leq -13$  |


#### PCS Band (Part 24E)

| Mode       | Band Edge | Emission (dBm) | Limit (dBm) |
|------------|-----------|----------------|-------------|
| GSM (GMSK) | Left      | -17.52         | $\leq -13$  |
|            | Right     | -16.87         | $\leq -13$  |

| Mode        | Band Edge | Emission (dBm) | Limit (dBm) |
|-------------|-----------|----------------|-------------|
| EDGE (8PSK) | Left      | -22.84         | $\leq -13$  |
|             | Right     | -22.84         | $\leq -13$  |


| Mode         | Band Edge | Emission (dBm) | Limit (dBm) |
|--------------|-----------|----------------|-------------|
| WCDMA (BPSK) | Left      | -13.52         | $\leq -13$  |
|              | Right     | -14.40         | $\leq -13$  |

### Cellular Band, Left Band Edge for GSM (GMSK) Mode

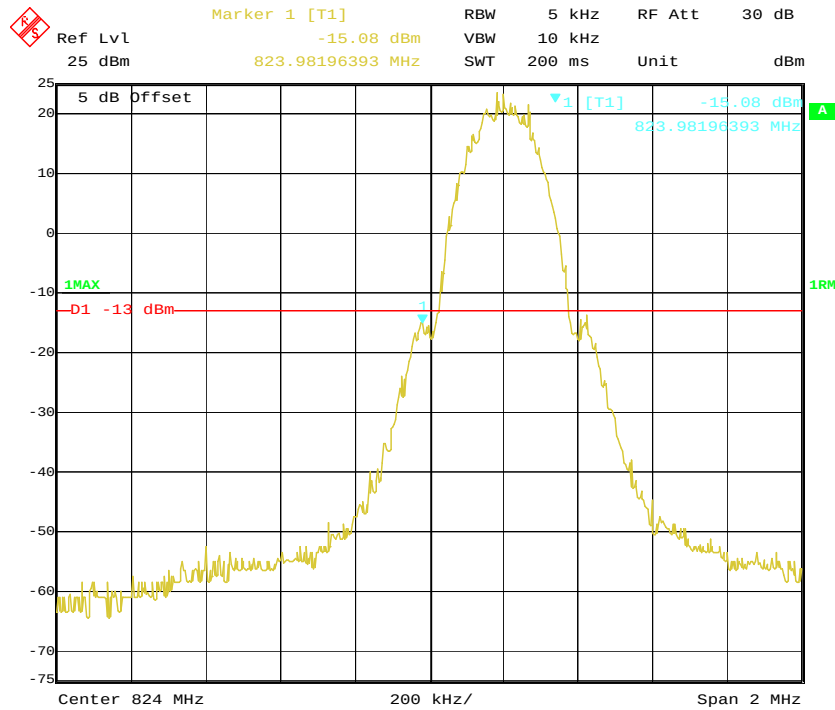


Date: 20.JUN.2014 11:27:10

### Cellular Band, Right Band Edge for GSM (GMSK) Mode

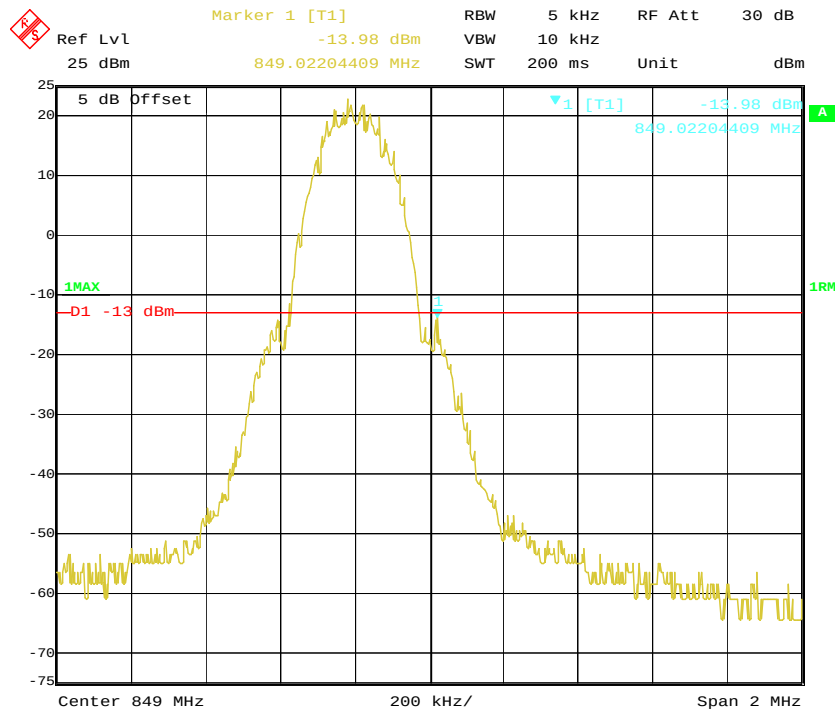


Date: 20.JUN.2014 11:28:15

### Cellular Band, Left Band Edge for EDGE (8PSK) Mode


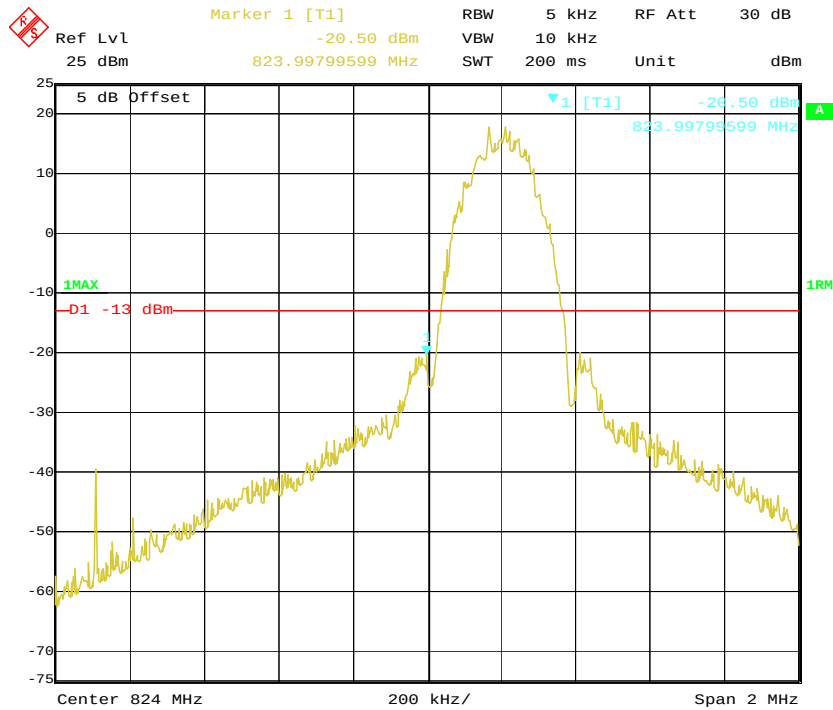


Date: 20. JUN. 2014 13:17:32


### Cellular Band, Right Band Edge for EDGE (8PSK) Mode

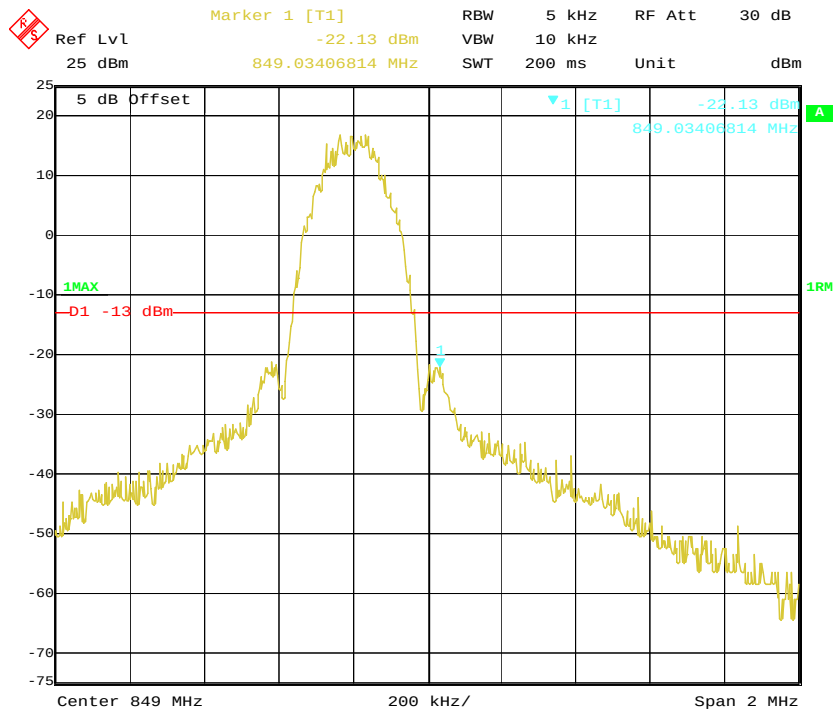


Date: 20. JUN. 2014 13:19:27

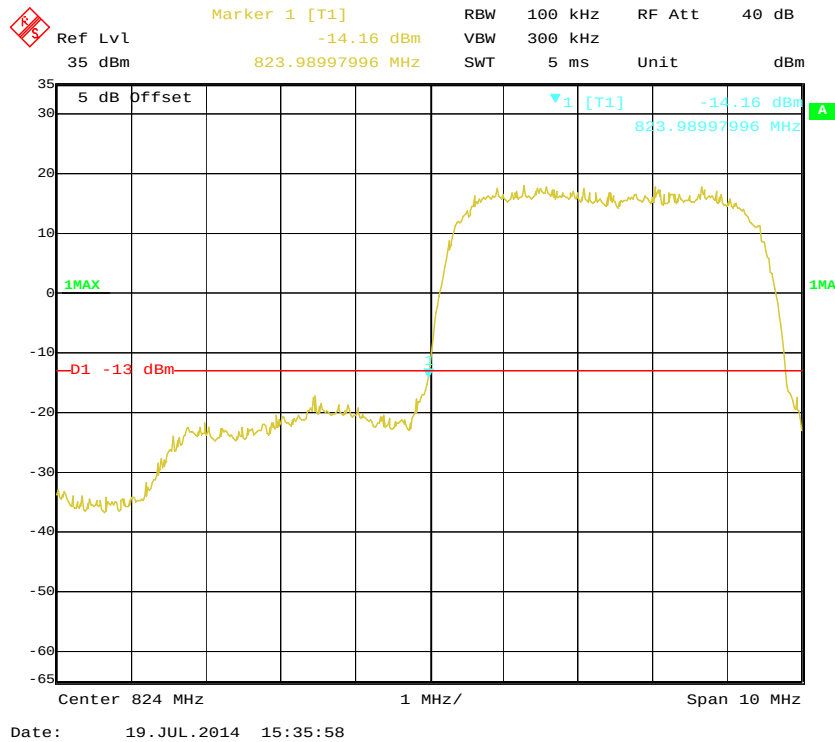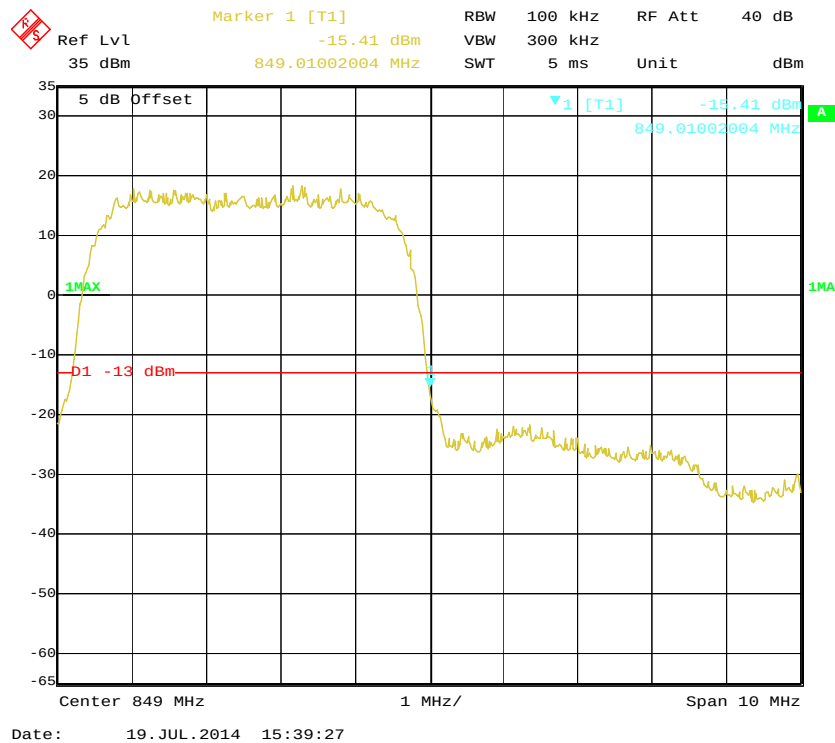**Cellular Band, Left Band Edge for WCDMA (BPSK) Mode****Cellular Band, Right Band Edge for WCDMA (BPSK) Mode**


### PCS Band, Left Band Edge for GSM (GMSK) Mode

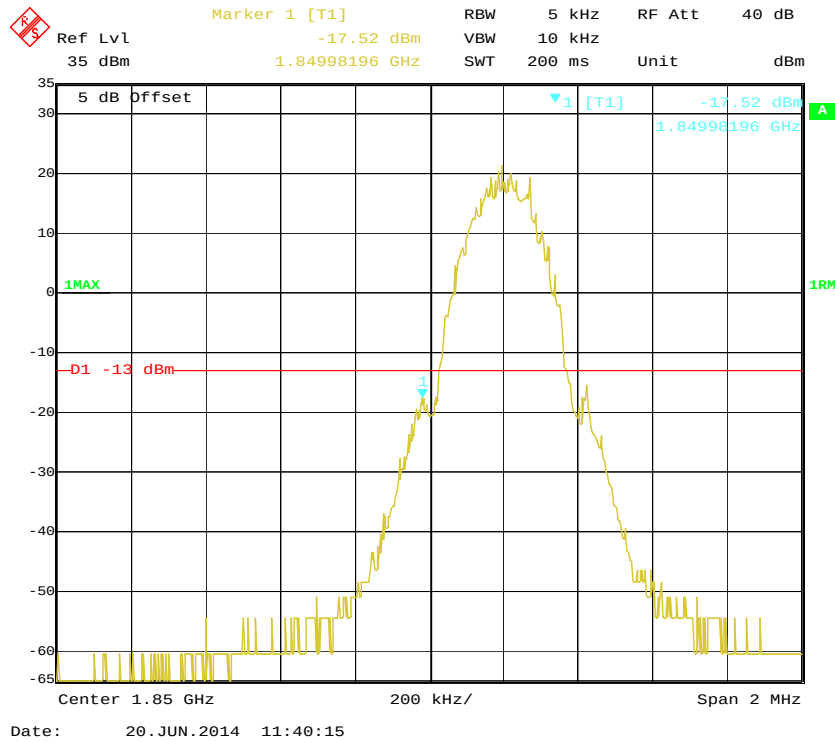


### PCS Band, Right Band Edge for GSM (GMSK) Mode

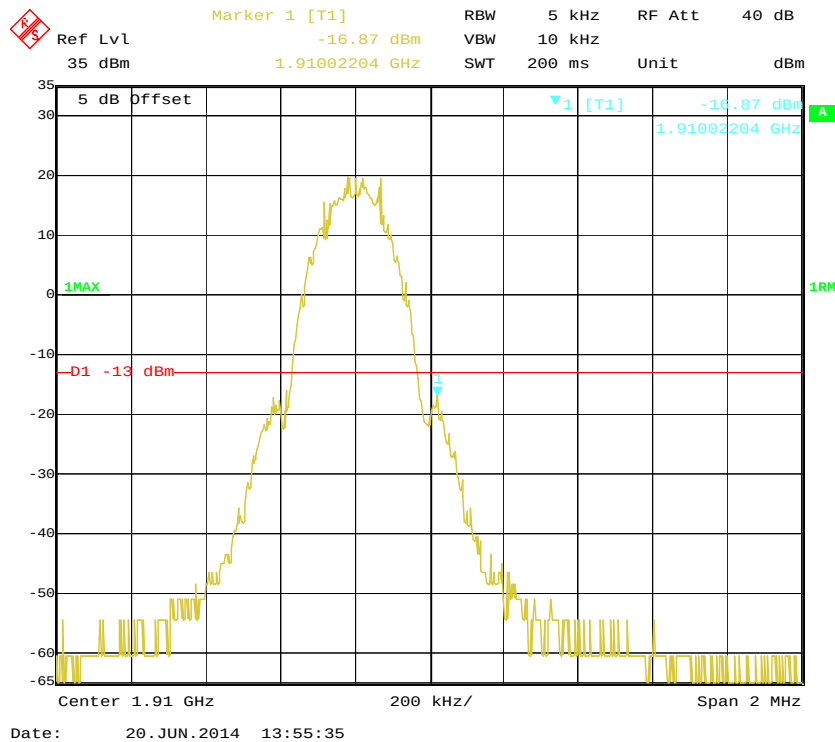


### PCS Band, Left Band Edge for EDGE (8PSK) Mode

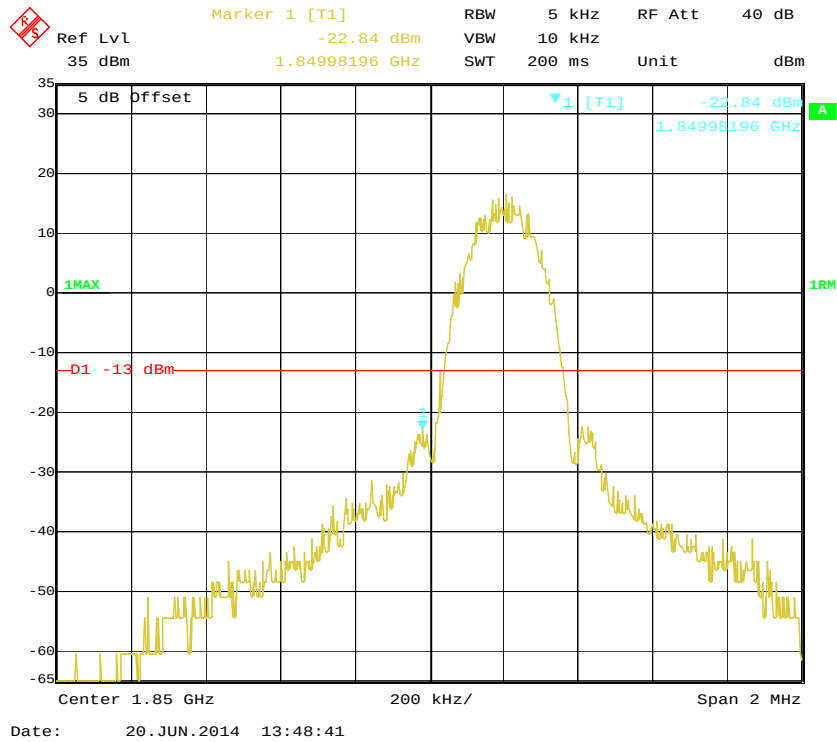


### PCS Band, Right Band Edge for EDGE (8PSK) Mode

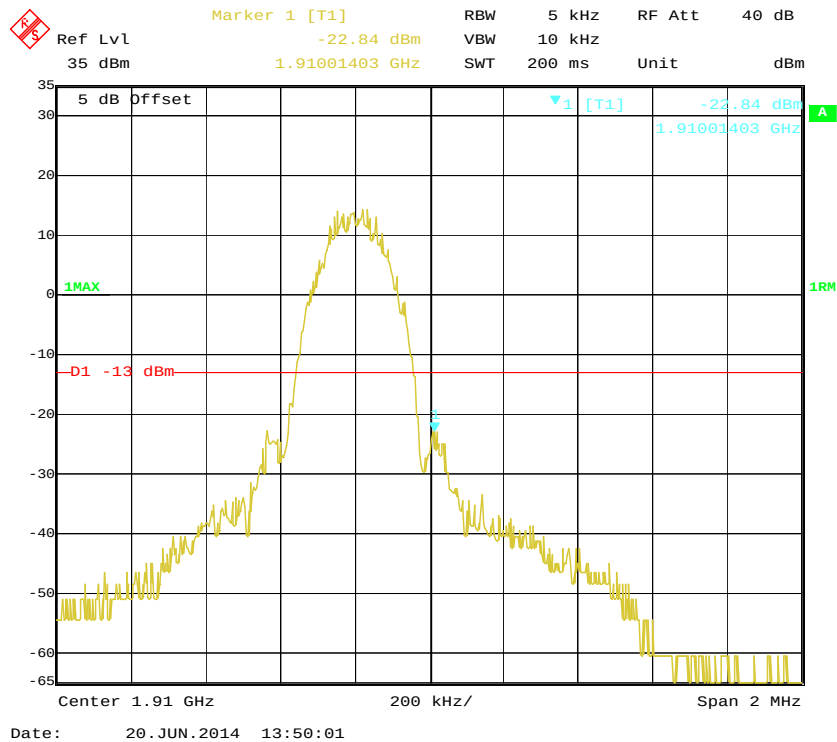

### PCS Band, Left Band Edge for WCDMA (BPSK) Mode

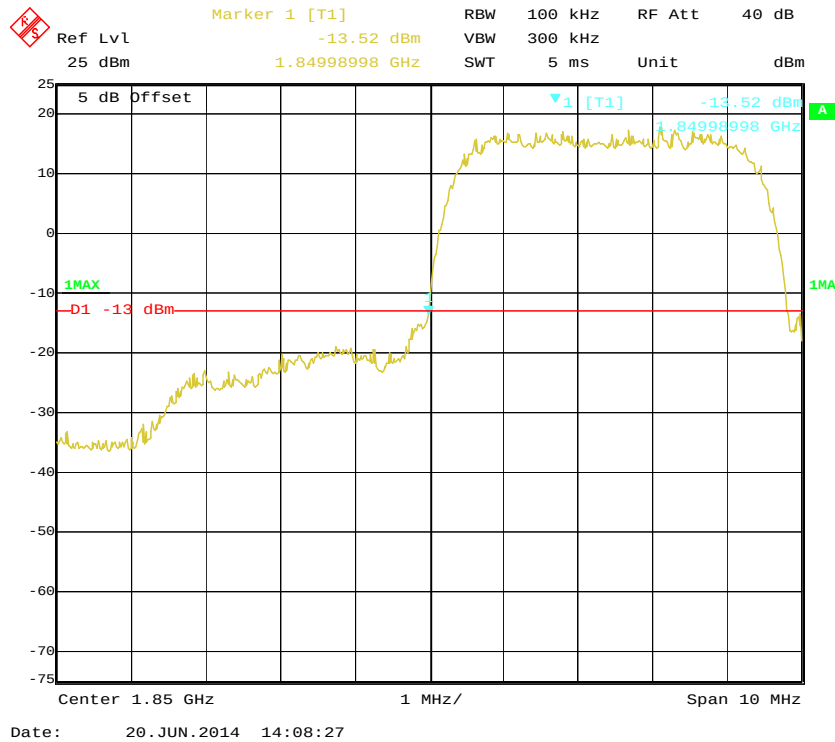

### PCS Band, Right Band Edge for WCDMA (BPSK) Mode

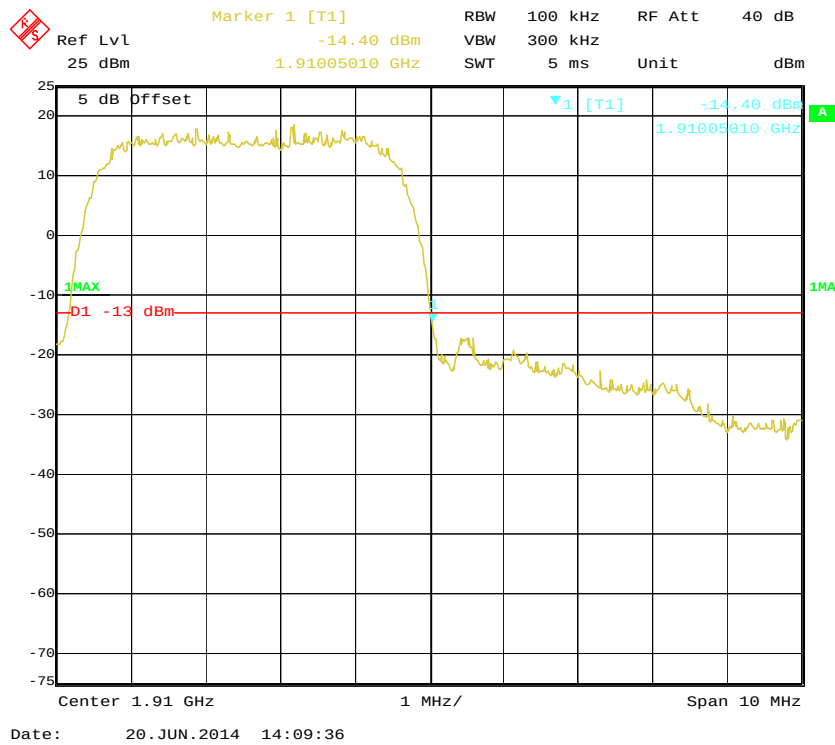

**FCC §2.1055, §22.355 & §24.235 - FREQUENCY STABILITY****Applicable Standard**

FCC § 2.1055, §22.355, §24.235

According to §22.355, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table below:

Frequency Tolerance for Transmitters in the Public Mobile Services

| Frequency Range (MHz) | Base, fixed (ppm) | Mobile ≤ 3 watts (ppm) | Mobile ≤ 3 watts (ppm) |
|-----------------------|-------------------|------------------------|------------------------|
| 25 to 50              | 20.0              | 20.0                   | 50.0                   |
| 50 to 450             | 5.0               | 5.0                    | 50.0                   |
| 450 to 512            | 2.5               | 5.0                    | 5.0                    |
| 821 to 896            | 1.5               | 2.5                    | 2.5                    |
| 928 to 929.           | 5.0               | N/A                    | N/A                    |
| 929 to 960.           | 1.5               | N/A                    | N/A                    |
| 2110 to 2220          | 10.0              | N/A                    | N/A                    |


According to §24.235, the frequency stability shall be sufficient to ensure that the fundamental emissions stays within the authorized frequency block.

**Test Procedure**

Frequency Stability vs. Temperature: The equipment under test was connected to an external DC power supply and the RF output was connected to communication test set via feed-through attenuators. The EUT was placed inside the temperature chamber. The DC leads and RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the communication test set.

Frequency Stability vs. Voltage: For hand carried, battery powered equipment; reduce primary supply voltage to the battery operating end point which shall be specified by the manufacturer.

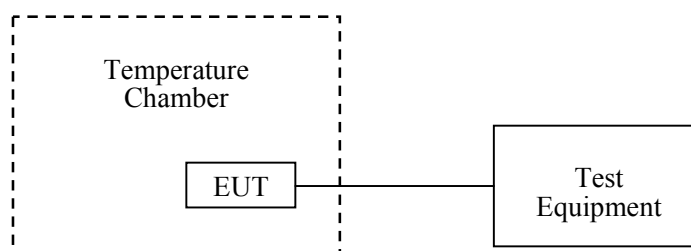



**Test Equipment List and Details**

| Manufacturer    | Description                          | Model   | Serial Number | Calibration Date | Calibration Due Date |
|-----------------|--------------------------------------|---------|---------------|------------------|----------------------|
| ESPEC           | Temperature & Humidity Chamber       | EL-10KA | 09107726      | 2013-11-01       | 2014-11-01           |
| Rohde & Schwarz | Universal Radio Communication Tester | CMU200  | 106891        | 2013-11-23       | 2014-11-23           |

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

**Test Data****Environmental Conditions**

|                           |           |
|---------------------------|-----------|
| <b>Temperature:</b>       | 27 °C     |
| <b>Relative Humidity:</b> | 55 %      |
| <b>ATM Pressure:</b>      | 101.0 kPa |

The testing was performed by Haiguo Li on 2014-07-10.

EUT operation mode: Transmitting

Test Result: Compliance. Please refer to the following tables.

**Cellular Band (Part 22H)****GSM Mode**

| Middle Channel, $f_0 = 836.6$ MHz |                             |                      |                       |             |
|-----------------------------------|-----------------------------|----------------------|-----------------------|-------------|
| Temperature (°C)                  | Power Supplied ( $V_{DC}$ ) | Frequency Error (Hz) | Frequency Error (ppm) | Limit (ppm) |
| -30                               | 3.8                         | 17                   | 0.02032               | 2.5         |
| -20                               |                             | 22                   | 0.02630               | 2.5         |
| -10                               |                             | 19                   | 0.02271               | 2.5         |
| 0                                 |                             | 25                   | 0.02988               | 2.5         |
| 10                                |                             | 23                   | 0.02749               | 2.5         |
| 20                                |                             | 16                   | 0.01913               | 2.5         |
| 30                                |                             | 23                   | 0.02749               | 2.5         |
| 40                                |                             | 21                   | 0.02510               | 2.5         |
| 50                                |                             | 22                   | 0.02630               | 2.5         |
| 25                                | $V_{min.} = 3.6$            | 20                   | 0.02391               | 2.5         |
| 25                                | $V_{max.} = 4.2$            | 17                   | 0.02032               | 2.5         |

**EDGE Mode**

| Middle Channel, $f_0 = 836.6$ MHz |                             |                      |                       |             |
|-----------------------------------|-----------------------------|----------------------|-----------------------|-------------|
| Temperature (°C)                  | Power Supplied ( $V_{DC}$ ) | Frequency Error (Hz) | Frequency Error (ppm) | Limit (ppm) |
| -30                               | 3.8                         | 22                   | 0.02630               | 2.5         |
| -20                               |                             | 24                   | 0.02869               | 2.5         |
| -10                               |                             | 20                   | 0.02391               | 2.5         |
| 0                                 |                             | 25                   | 0.02988               | 2.5         |
| 10                                |                             | 20                   | 0.02391               | 2.5         |
| 20                                |                             | 22                   | 0.02630               | 2.5         |
| 30                                |                             | 23                   | 0.02749               | 2.5         |
| 40                                |                             | 27                   | 0.03227               | 2.5         |
| 50                                |                             | 22                   | 0.02630               | 2.5         |
| 25                                | $V_{min.} = 3.6$            | 24                   | 0.02869               | 2.5         |
| 25                                | $V_{max.} = 4.2$            | 25                   | 0.02988               | 2.5         |

**WCDMA Mode**

| Middle Channel, $f_0 = 836.6$ MHz |                             |                      |                       |             |
|-----------------------------------|-----------------------------|----------------------|-----------------------|-------------|
| Temperature (°C)                  | Power Supplied ( $V_{DC}$ ) | Frequency Error (Hz) | Frequency Error (ppm) | Limit (ppm) |
| -30                               | 3.8                         | 23                   | 0.02749               | 2.5         |
| -20                               |                             | 26                   | 0.03108               | 2.5         |
| -10                               |                             | 22                   | 0.02630               | 2.5         |
| 0                                 |                             | 23                   | 0.02749               | 2.5         |
| 10                                |                             | 24                   | 0.02869               | 2.5         |
| 20                                |                             | 22                   | 0.02630               | 2.5         |
| 30                                |                             | 25                   | 0.02988               | 2.5         |
| 40                                |                             | 20                   | 0.02391               | 2.5         |
| 50                                |                             | 24                   | 0.02869               | 2.5         |
| 25                                | $V_{min.} = 3.6$            | 23                   | 0.02749               | 2.5         |
| 25                                | $V_{max.} = 4.2$            | 25                   | 0.02988               | 2.5         |

**PCS Band (Part 24E)****GSM Mode**

| Middle Channel, $f_0 = 1880.0$ MHz |                             |                      |                       |             |
|------------------------------------|-----------------------------|----------------------|-----------------------|-------------|
| Temperature (°C)                   | Power Supplied ( $V_{DC}$ ) | Frequency Error (Hz) | Frequency Error (ppm) | Limit (ppm) |
| -30                                | 3.8                         | 22                   | 0.01170               | Pass        |
| -20                                |                             | 24                   | 0.01277               | Pass        |
| -10                                |                             | 20                   | 0.01064               | Pass        |
| 0                                  |                             | 23                   | 0.01223               | Pass        |
| 10                                 |                             | 20                   | 0.01064               | Pass        |
| 20                                 |                             | 18                   | 0.00957               | Pass        |
| 30                                 |                             | 17                   | 0.00904               | Pass        |
| 40                                 |                             | 22                   | 0.01170               | Pass        |
| 50                                 |                             | 24                   | 0.01277               | Pass        |
| 25                                 | $V_{min.} = 3.6$            | 25                   | 0.01330               | Pass        |
| 25                                 | $V_{max.} = 4.2$            | 20                   | 0.01064               | Pass        |

**EDGE Mode**

| Middle Channel, $f_0 = 1880.0$ MHz |                             |                      |                       |             |
|------------------------------------|-----------------------------|----------------------|-----------------------|-------------|
| Temperature (°C)                   | Power Supplied ( $V_{DC}$ ) | Frequency Error (Hz) | Frequency Error (ppm) | Limit (ppm) |
| -30                                | 3.8                         | 24                   | 0.01277               | Pass        |
| -20                                |                             | 21                   | 0.01117               | Pass        |
| -10                                |                             | 23                   | 0.01223               | Pass        |
| 0                                  |                             | 20                   | 0.01064               | Pass        |
| 10                                 |                             | 24                   | 0.01277               | Pass        |
| 20                                 |                             | 21                   | 0.01117               | Pass        |
| 30                                 |                             | 22                   | 0.01170               | Pass        |
| 40                                 |                             | 25                   | 0.01330               | Pass        |
| 50                                 |                             | 21                   | 0.01117               | Pass        |
| 25                                 | $V_{min.} = 3.6$            | 24                   | 0.01277               | Pass        |
| 25                                 | $V_{max.} = 4.2$            | 20                   | 0.01064               | Pass        |

**WCDMA Mode**

| <b>Middle Channel, <math>f_0=1880.0</math> MHz</b> |                                            |                                     |                                      |                        |
|----------------------------------------------------|--------------------------------------------|-------------------------------------|--------------------------------------|------------------------|
| <b>Temperature<br/>(°C)</b>                        | <b>Power Supplied<br/>(V<sub>DC</sub>)</b> | <b>Frequency<br/>Error<br/>(Hz)</b> | <b>Frequency<br/>Error<br/>(ppm)</b> | <b>Limit<br/>(ppm)</b> |
| -30                                                | 3.8                                        | 21                                  | 0.01117                              | Pass                   |
| -20                                                |                                            | 20                                  | 0.01064                              | Pass                   |
| -10                                                |                                            | 22                                  | 0.01170                              | Pass                   |
| 0                                                  |                                            | 19                                  | 0.01011                              | Pass                   |
| 10                                                 |                                            | 24                                  | 0.01277                              | Pass                   |
| 20                                                 |                                            | 19                                  | 0.01011                              | Pass                   |
| 30                                                 |                                            | 22                                  | 0.01170                              | Pass                   |
| 40                                                 |                                            | 21                                  | 0.01117                              | Pass                   |
| 50                                                 |                                            | 25                                  | 0.01330                              | Pass                   |
| 25                                                 | V <sub>min.</sub> = 3.6                    | 21                                  | 0.01117                              | Pass                   |
| 25                                                 | V <sub>max.</sub> = 4.2                    | 23                                  | 0.01223                              | Pass                   |

## PRODUCT SIMILARITY DECLARATION LETTER

---



DDM Brands LLC  
1616 NW, 84TH Ave. Miami, Florida, U.S.A  
Tel: +13057750325 Fax: +13057750325

---

2014-7-7

### Product Similarity Declaration Letter

To Whom It May Concern,

We, DDM Brands LLC, hereby declare that our product Mobile Phone, the model YEZZ WP 47, WP47, WP47B, MONACO 47 and BILLY 4.7 are electrically identical, they have the same PCB layout and schematic, the only difference is the model number for the purpose of market.

The model YEZZ WP 47 was tested by BACL.

Please contact me if you have any question.

Signature:

Luis Sosa  
CEO

A handwritten signature in black ink, appearing to be 'LS' or 'Luis Sosa', written over a light gray grid background.

\*\*\*\*\* END OF REPORT \*\*\*\*\*