



**FCC CFR47 PART 15 SUBPART C  
INDUSTRY CANADA RSS-210 ISSUE 8**

**CERTIFICATION TEST REPORT**

**FOR**

**GLASS**

**MODEL NUMBER: XEB**

**FCC ID: A4R-X1**

**REPORT NUMBER: 12U14656-2**

**ISSUE DATE: NOVEMBER 29, 2012**

*Prepared for*  
**GOOGLE INC.**  
**1600 AMPHITHEATRE PARKWAY**  
**MOUNTAIN VIEW CA, 94043, U.S.A**

*Prepared by*  
**UL CCS**  
**47173 BENICIA STREET**  
**FREMONT, CA 94538, U.S.A.**  
**TEL: (510) 771-1000**  
**FAX: (510) 661-0888**



NVLAP LAB CODE 200065-0

Revision History

Rev.	Issue Date	Revisions	Revised By
--	11/29/12	Initial Issue	T. LEE

## TABLE OF CONTENTS

<b>1. ATTESTATION OF TEST RESULTS .....</b>	<b>5</b>
<b>2. TEST METHODOLOGY .....</b>	<b>6</b>
<b>3. FACILITIES AND ACCREDITATION .....</b>	<b>6</b>
<b>4. CALIBRATION AND UNCERTAINTY .....</b>	<b>6</b>
4.1. MEASURING INSTRUMENT CALIBRATION .....	6
4.2. SAMPLE CALCULATION .....	6
4.3. MEASUREMENT UNCERTAINTY .....	6
<b>5. EQUIPMENT UNDER TEST .....</b>	<b>7</b>
5.1. DESCRIPTION OF EUT .....	7
5.2. MAXIMUM OUTPUT POWER .....	7
5.3. DESCRIPTION OF AVAILABLE ANTENNAS .....	7
5.4. SOFTWARE AND FIRMWARE .....	7
5.5. WORST-CASE CONFIGURATION AND MODE .....	8
5.6. DESCRIPTION OF TEST SETUP .....	9
<b>6. TEST AND MEASUREMENT EQUIPMENT .....</b>	<b>11</b>
<b>7. MEASUREMENT METHODS .....</b>	<b>12</b>
7.1. DUTY CYCLE .....	12
<b>8. ANTENNA PORT TEST RESULTS .....</b>	<b>16</b>
8.1. 802.11b MODE IN THE 2.4 GHz BAND .....	16
8.1.1. 6 dB BANDWIDTH .....	16
8.1.2. 99% BANDWIDTH .....	19
8.1.3. AVERAGE POWER .....	22
8.1.4. OUTPUT POWER .....	23
8.1.5. PSD .....	26
8.1.6. OUT-OF-BAND EMISSIONS .....	29
8.2. 802.11g MODE IN THE 2.4 GHz BAND .....	34
8.2.1. 6 dB BANDWIDTH .....	34
8.2.2. 99% BANDWIDTH .....	37
8.2.3. AVERAGE POWER .....	40
8.2.4. OUTPUT POWER .....	41
8.2.5. PSD .....	45
8.2.6. OUT-OF-BAND EMISSIONS .....	48
<b>9. RADIATED TEST RESULTS .....</b>	<b>53</b>
9.1. LIMITS AND PROCEDURE .....	53
9.2. TRANSMITTER ABOVE 1 GHz .....	54
9.2.1. TX ABOVE 1 GHz 802.11b MODE IN THE 2.4 GHz BAND .....	54

9.3.	<i>TX ABOVE 1 GHz 802.11g MODE IN THE 2.4 GHz BAND .....</i>	<i>59</i>
9.4.	<i>WORST-CASE BELOW 1 GHz.....</i>	<i>68</i>
10.	<b>AC MAINS LINE CONDUCTED EMISSIONS .....</b>	<b>70</b>

## 1. ATTESTATION OF TEST RESULTS

**COMPANY NAME:** GOOGLE INC.  
1600 AMPHITHEATRE PARKWAY  
MOUNTAIN VIEW, CA, 94043, U.S.A

**EUT DESCRIPTION:** GLASS

**MODEL:** XEB

**SERIAL NUMBER:** 015498FC0A011010

**DATE TESTED:** NOVEMBER 19-28, 2012

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Pass

UL CCS tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL CCS based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

**Note:** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL CCS and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL CCS will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For UL CCS By:



TIM LEE  
WiSE PROJECT MANAGER  
UL CCS

Tested By:



THANH NGUYEN  
EMC ENGINEER  
UL CCS

## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with FCC CFR 47 Part 2, FCC CFR 47 Part 15, ANSI C63.10-2003, RSS-GEN Issue 3, and RSS-210 Issue 8.

## 3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA.

UL CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

### 4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamplifier Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

### 4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.52 dB
Radiated Disturbance, 30 to 1000 MHz	4.94 dB

Uncertainty figures are valid to a confidence level of 95%.

## 5. EQUIPMENT UNDER TEST

### 5.1. DESCRIPTION OF EUT

The EUT is a glass providing a heads-up video display. The device incorporates an 802.11 b/g 2.4 GHz WLAN and BT, BT-LE radio. This report covers the 802.11b/g/ transceiver.

The radio module is manufactured by Broadcom.

### 5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum conducted output power as follows:

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
2412 - 2462	802.11b	20.24	105.68
2412 - 2462	802.11g	25.98	396.28

### 5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes a coaxial monopole antenna, with a maximum gain is 3.32 dBi.

### 5.4. SOFTWARE AND FIRMWARE

The firmware/software installed in the EUT during testing was 20121114095638.

## **5.5. WORST-CASE CONFIGURATION AND MODE**

Radiated emission and power line conducted emission were performed with the EUT plays the video script with audio set to transmit at the channel with highest output power as worst-case scenario.

The fundamental of the EUT was investigated in three orthogonal orientations X,Y,Z, it was determined that Z orientation (Side with glass at the top) was worst-case orientation; therefore, all final radiated testing was performed with the EUT in Z orientation.

Based on the baseline scan, the worst-case data rates were:

802.11b mode: 1 Mbps

802.11g mode: 6 Mbps



## 5.6. DESCRIPTION OF TEST SETUP

### SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
AC Charger	GOOGLE	10AG212020	N/A	N/A


### I/O CABLES

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC	1	USB	Shielded	1.2	No

### TEST SETUP

The EUT was at the worst position and connected to the charger played the video script and transmit the worst case WiFi when tested.

**SETUP DIAGRAM FOR TESTS**

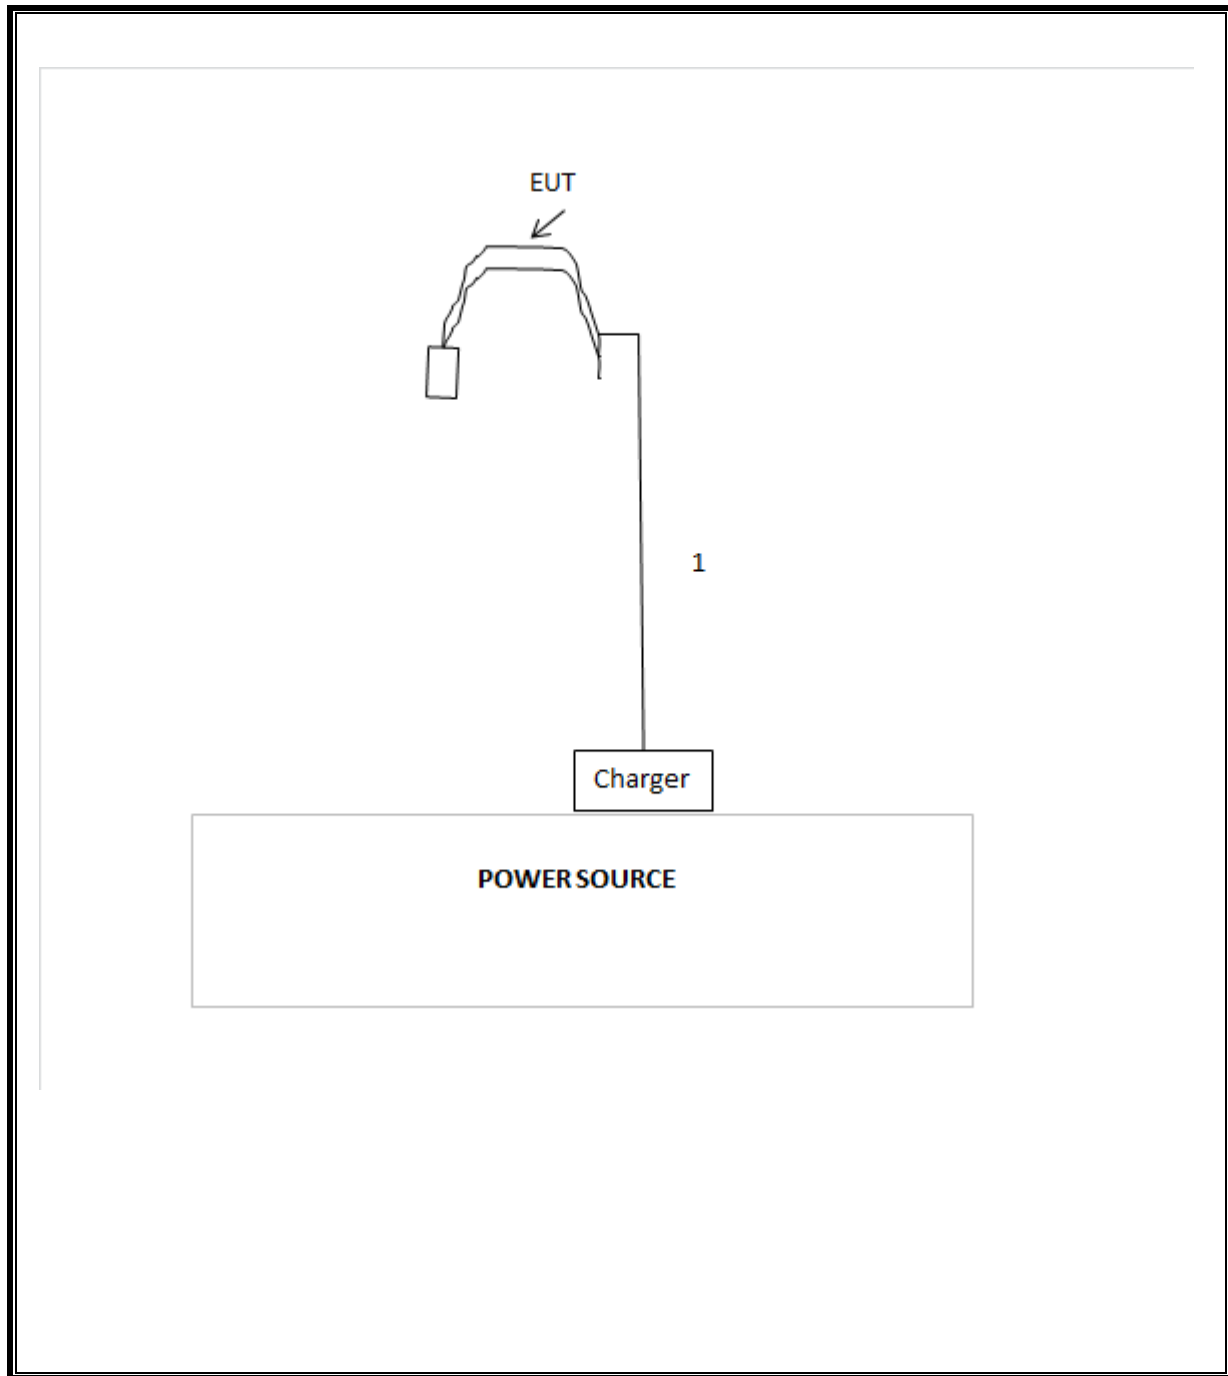

## 6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List					
Description	Manufacturer	Model	Asset	Cal Date	Cal Due
Antenna, Horn, 18 GHz	EMCO	3115	C00872	09/20/12	09/20/13
Spectrum Analyzer, 44 GHz	Agilent / HP	E4446A	C01012	10/21/12	21/10/13
Preamplifier, 26.5 GHz	Agilent / HP	8449B	C00749	10/21/12	10/21/13
Preamplifier, 1300 MHz	Agilent / HP	8447D	C00558	02/21/12	02/21/13
Bilog 30-2000MHz	Sunol	JB1	C01071	01/26/12	01/26/13
Power meter	HP	437B	T226	06/25/12	06/25/13
Power Sensor	HP	8481A	T233	06/26/12	06/26/13
LISN, 30 MHz	FCC	LISN-50/250-25	N02625	12/13/11	12/13/12
LISN, 10 kHz ~ 30 MHz	Solar	8012-50-R-24-B	N02481	03/07/12	03/07/13
EMI Test Receiver	R&S	ESC20	N02396	08/18/12	08/18/13

## 7. MEASUREMENT METHODS

### 7.1. DUTY CYCLE

#### LIMITS


None; for reporting purposes only.


#### RESULTS

Mode	Tx on (usec)	Tx on + Tx off (usec)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)
802.11b	1000	1000	100.00	0.00
802.11g	1420	1457	97.46	0.11


### Duty Cycle b Mode

Note: Unit has a continuous on time of more than 100ms.

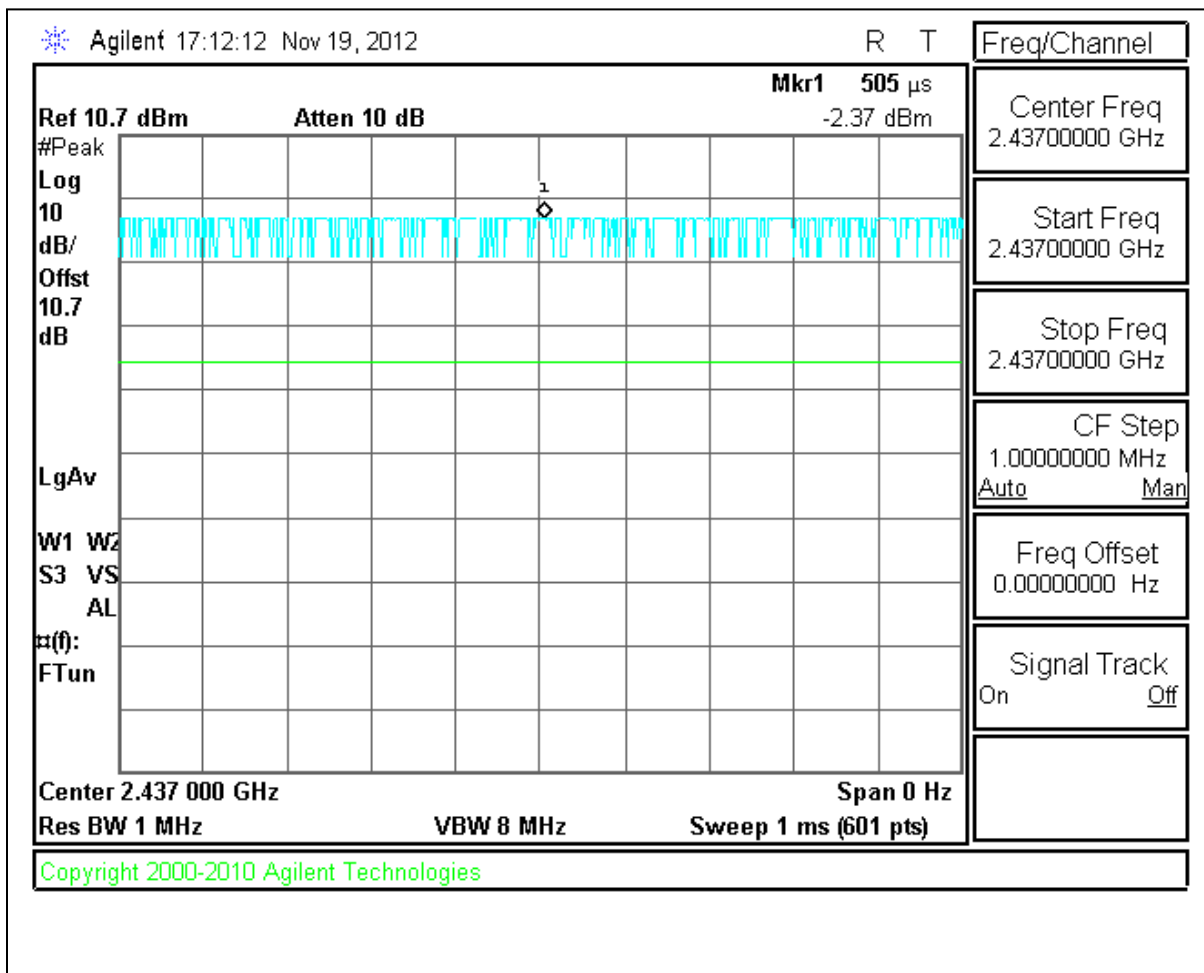

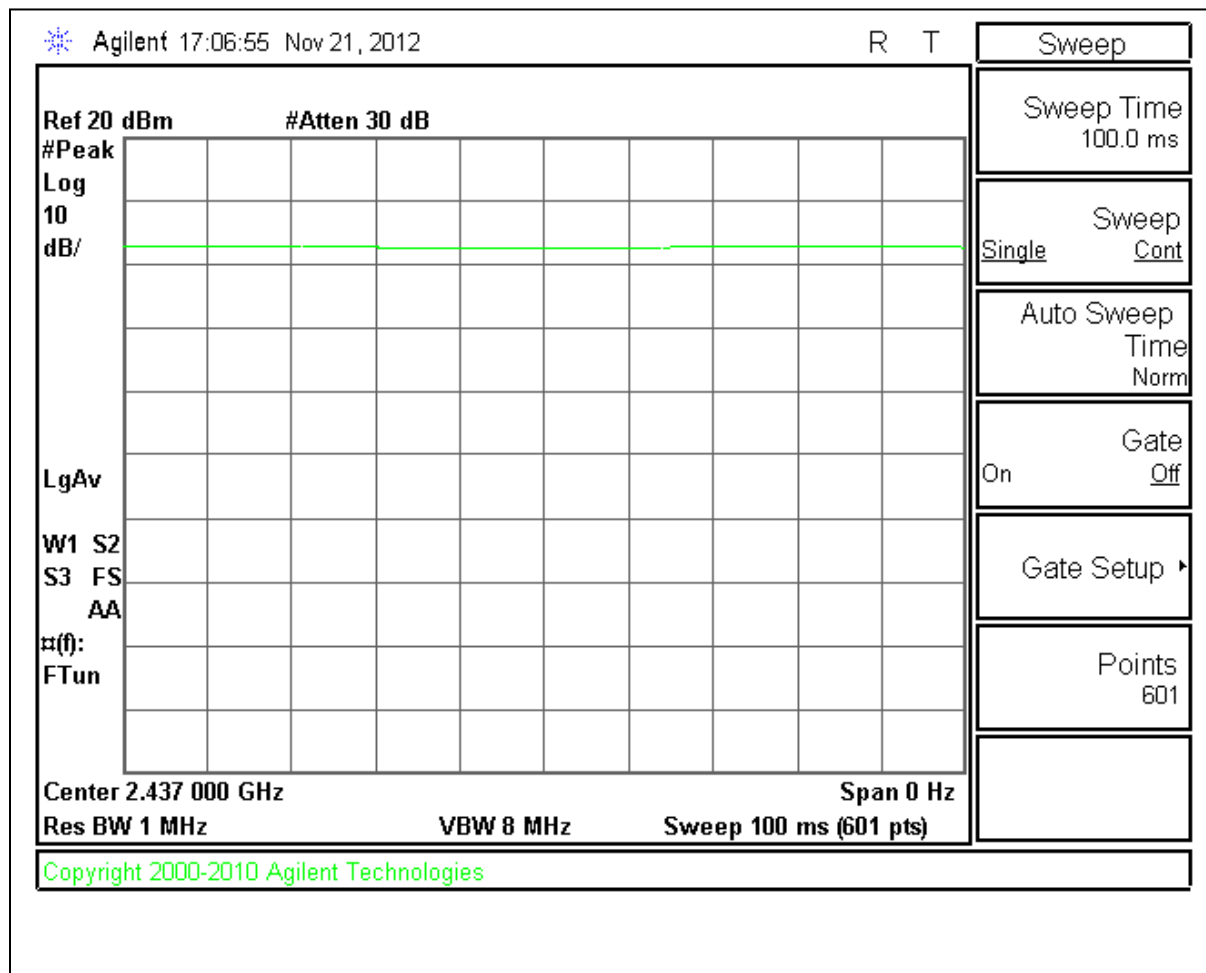

# Duty Cycle g Mode

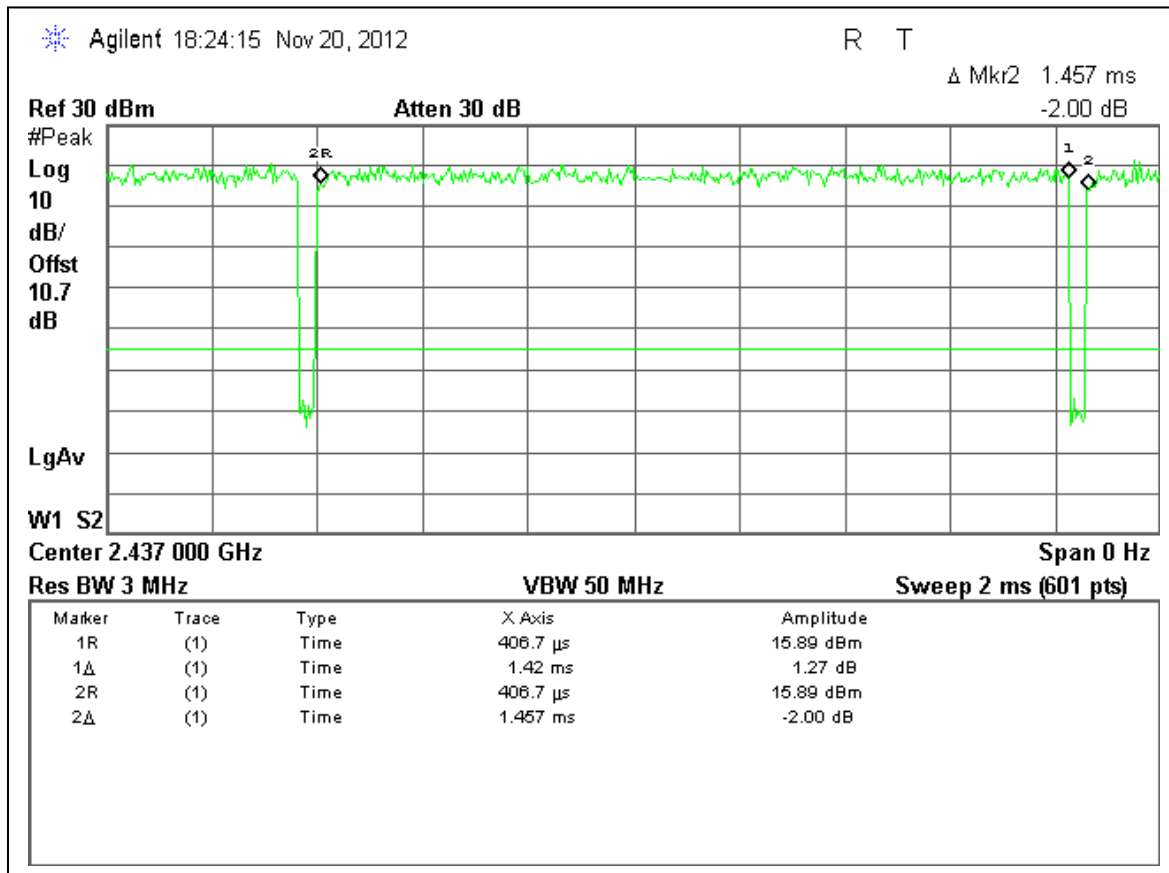

## 8. ANTENNA PORT TEST RESULTS

### 8.1. 802.11b MODE IN THE 2.4 GHz BAND

#### 8.1.1. 6 dB BANDWIDTH

##### LIMITS

FCC §15.247 (a) (2)

IC RSS-210 A8.2 (a)

The minimum 6 dB bandwidth shall be at least 500 kHz.

##### TEST PROCEDURE



The transmitter output is connected to a spectrum analyzer with the RBW set between 1% and 5% of the EBW, the VBW  $\geq 3 \times$  RBW, peak detector and max hold.


##### RESULTS

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	2412	8.020	0.5
Mid	2437	7.540	0.5
High	2462	8.000	0.5



**6 dB BANDWIDTH**

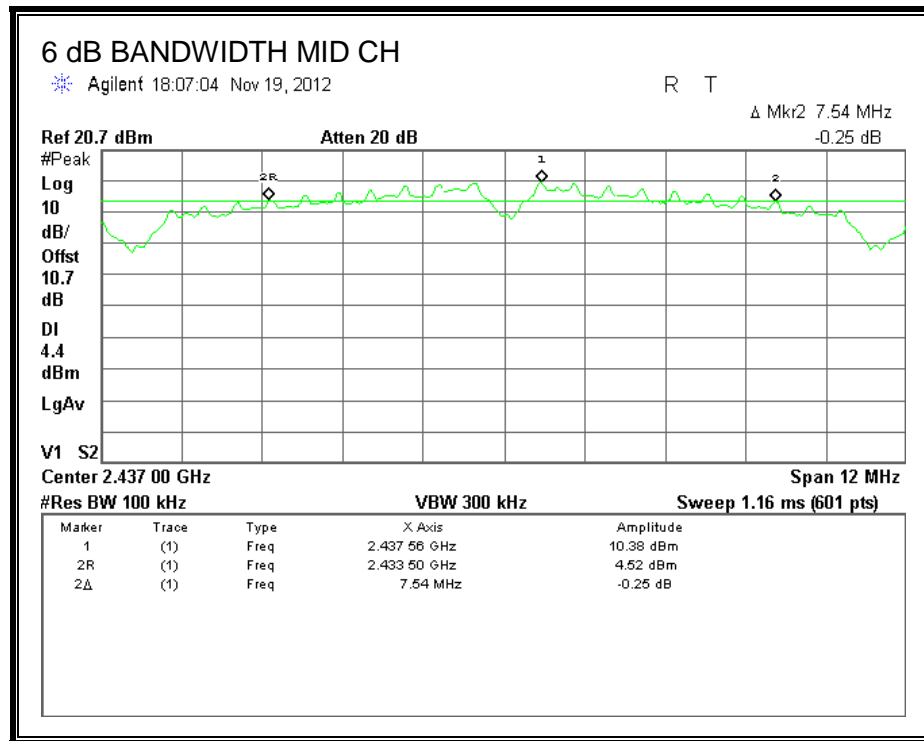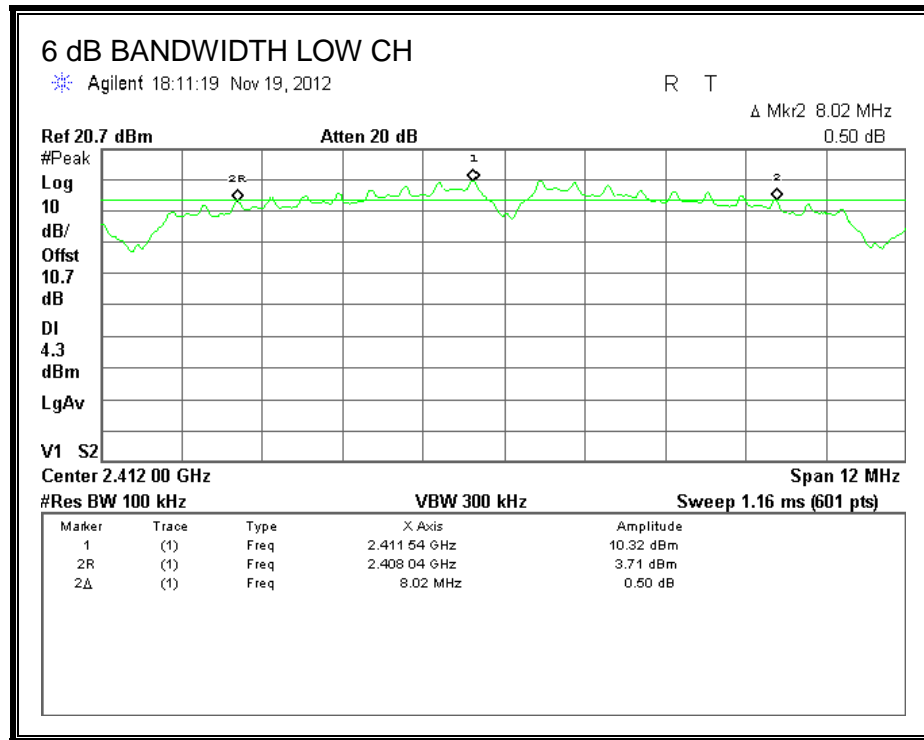

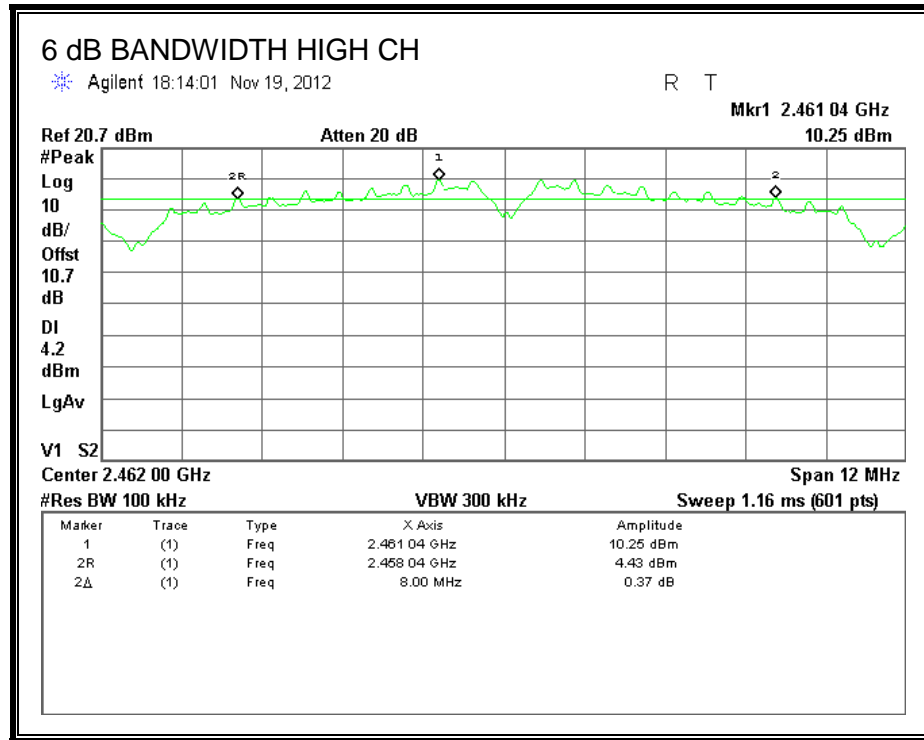

### **8.1.2. 99% BANDWIDTH**

#### **LIMITS**

None; for reporting purposes only.



#### **TEST PROCEDURE**


The transmitter output is connected to the spectrum analyzer. The RBW is set to 1% to 3% of the 99 % bandwidth and to 1% of the span. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth function is utilized.

#### **RESULTS**

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2412	12.1950
Mid	2437	13.0317
High	2462	12.2907

**99% BANDWIDTH**

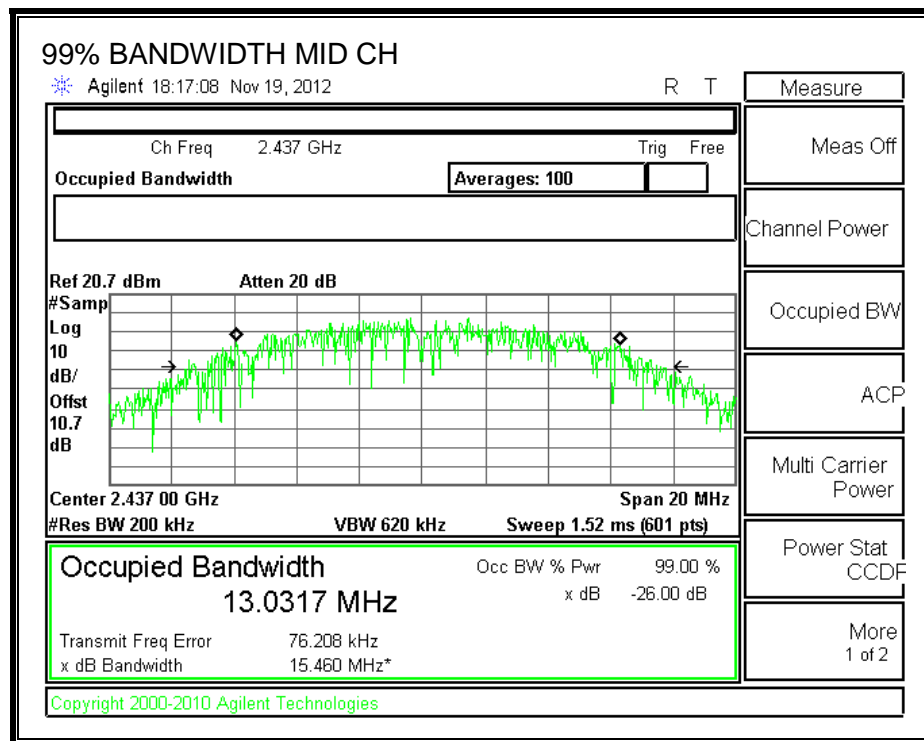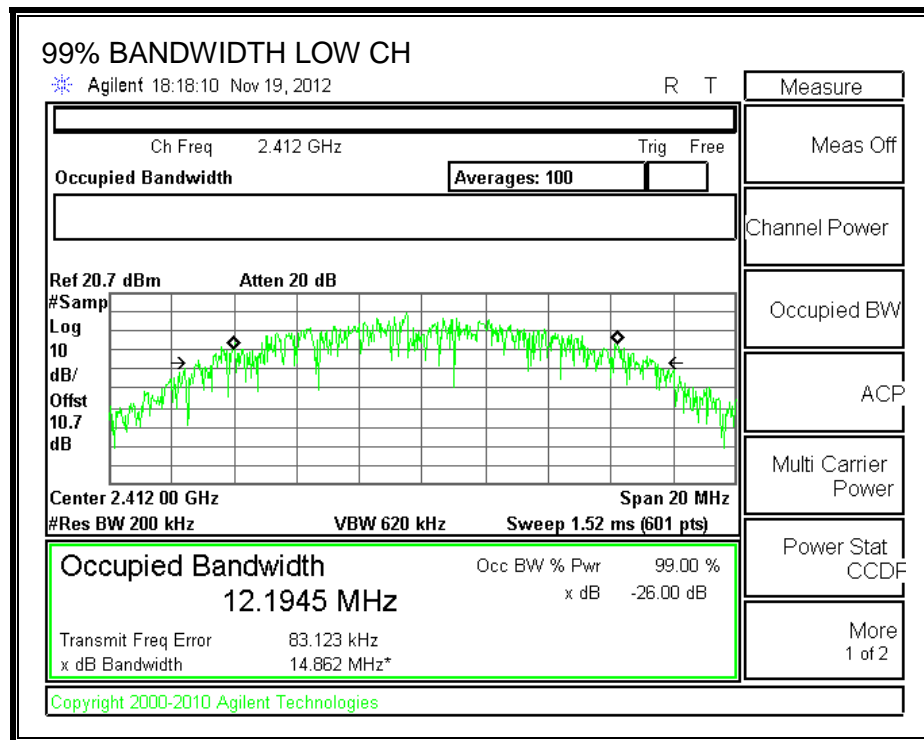

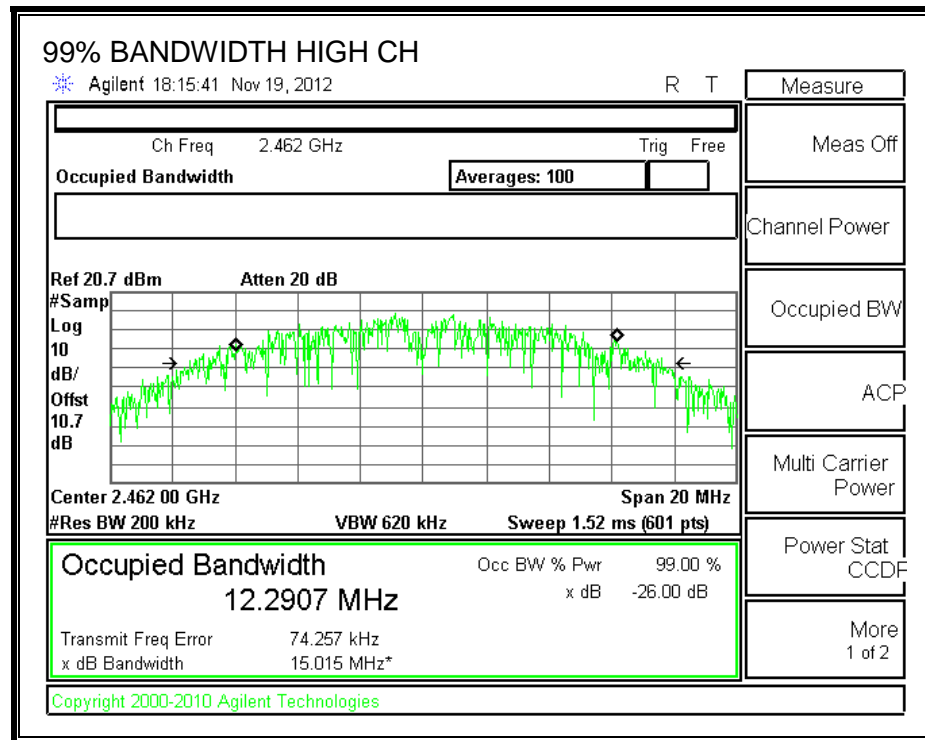

### 8.1.3. AVERAGE POWER

#### LIMITS

None; for reporting purposes only.

#### TEST PROCEDURE

The transmitter output is connected to a power meter.

The cable assembly insertion loss of 10.7 dB (including 10 dB pad and .7 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

#### RESULTS

Channel	Frequency (MHz)	Power (dBm)
Low	2412	17.20
Mid	2437	17.30
High	2462	17.10

## 8.1.4. OUTPUT POWER

### LIMITS

FCC §15.247

IC RSS-210 A8.4

For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt, based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.



### DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.


### RESULTS

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Margin (dB)
Low	2412	19.87	19.87	30.00	-10.13
Mid	2437	20.06	20.06	30.00	-9.94
High	2462	20.24	20.24	30.00	-9.76

**OUTPUT POWER, Chain 0**

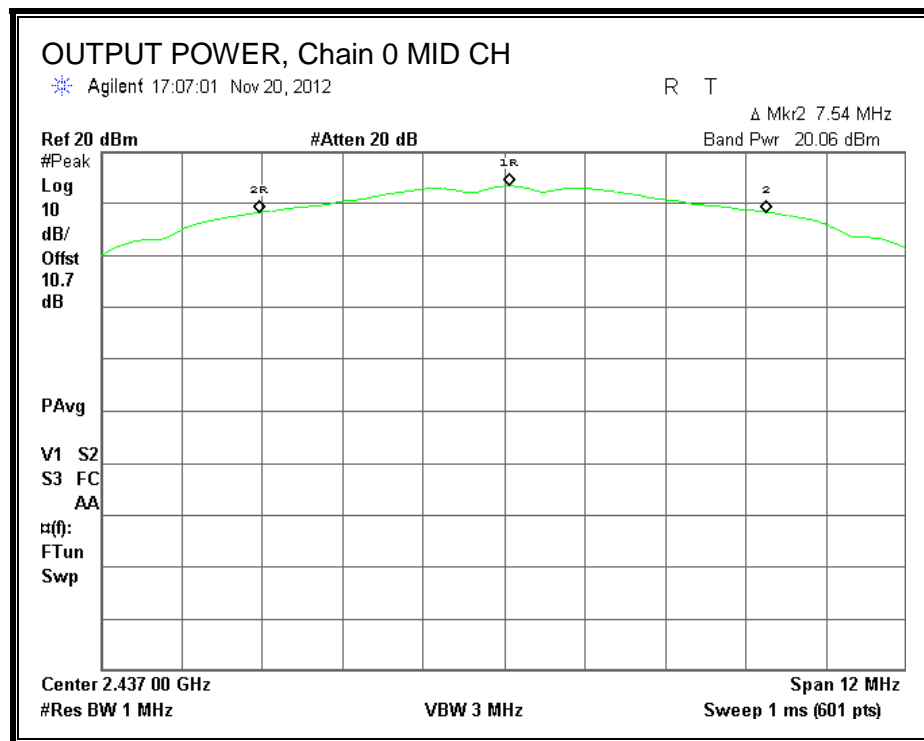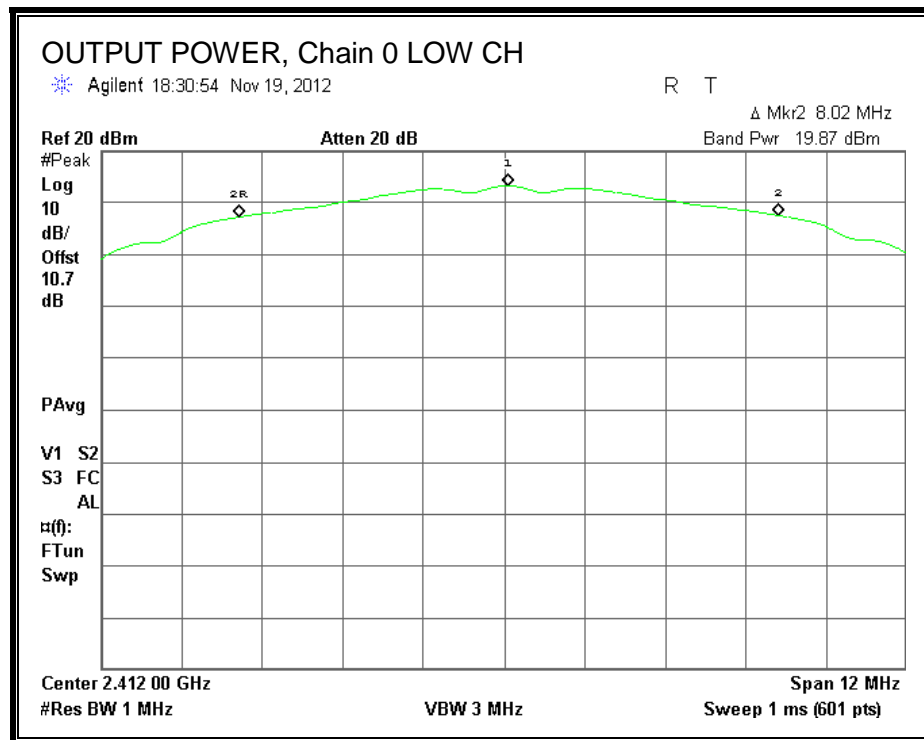



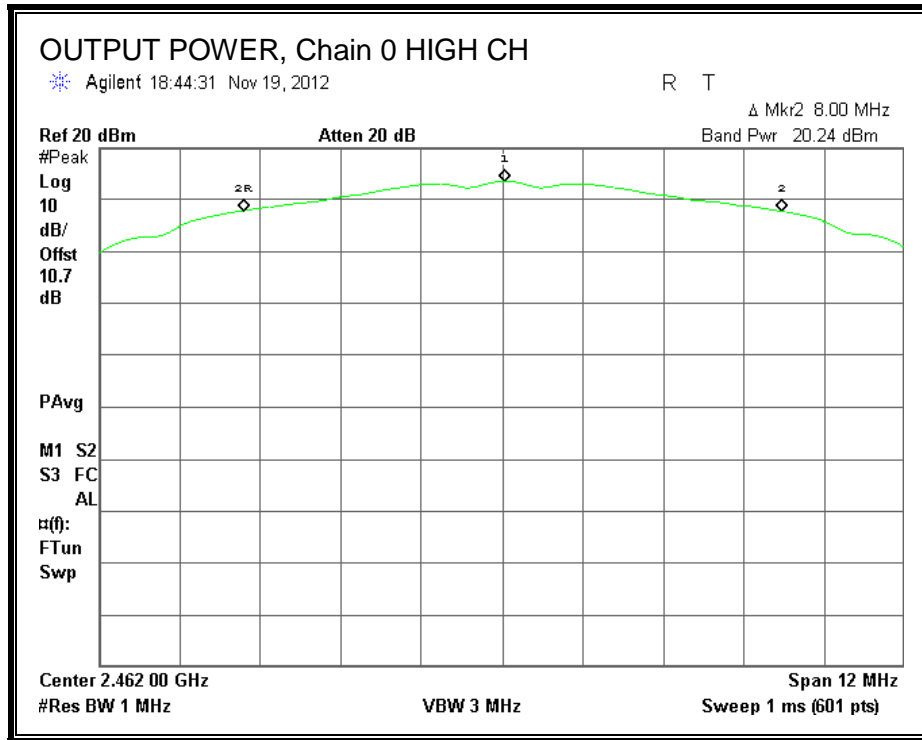

### 8.1.5. PSD

#### LIMITS

FCC §15.247

IC RSS-210 A8.2



The power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.


#### RESULTS

##### PSD Results

Channel	Frequency (MHz)	Chain 0 Meas (dBm)	Limit (dBm)	Margin (dB)
Low	2412	-4.49	8.0	-12.5
Mid	2437	-3.95	8.0	-12.0
High	2462	-2.91	8.0	-10.9

**PSD, Chain 0**

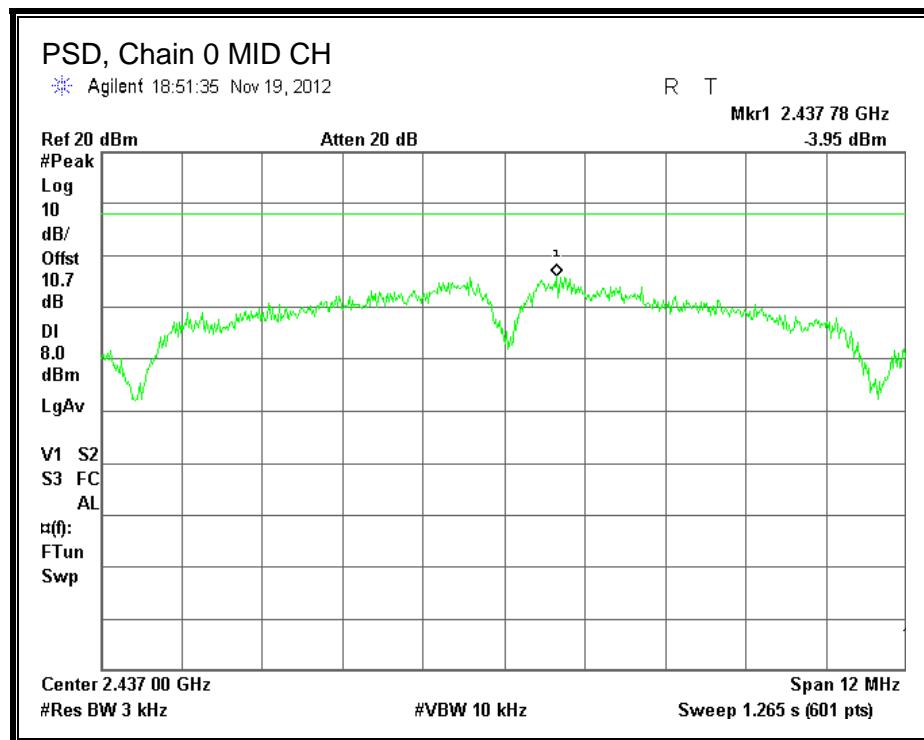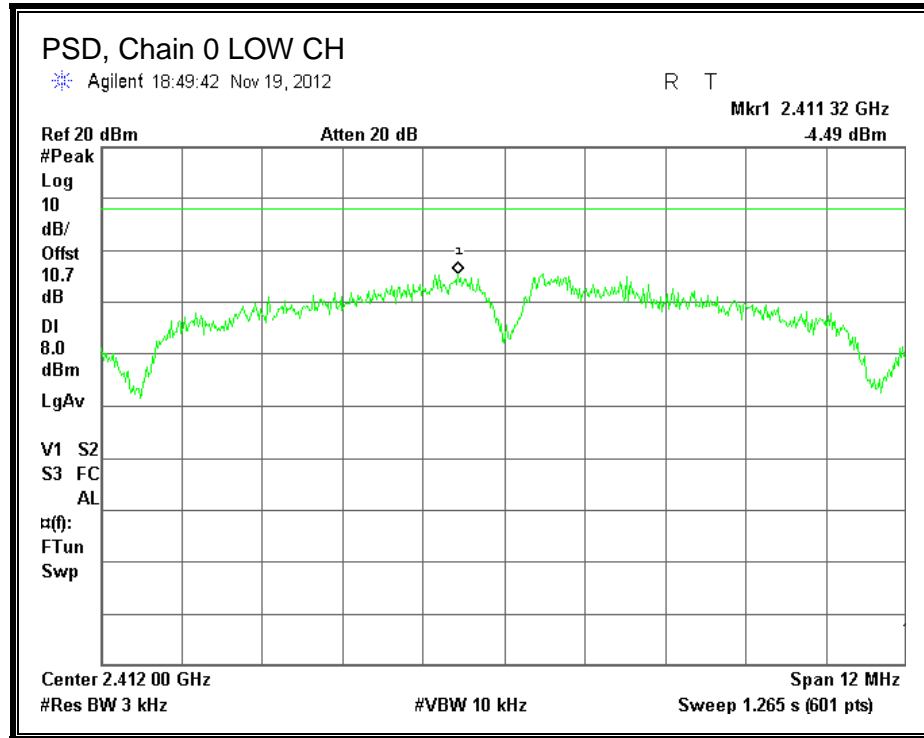

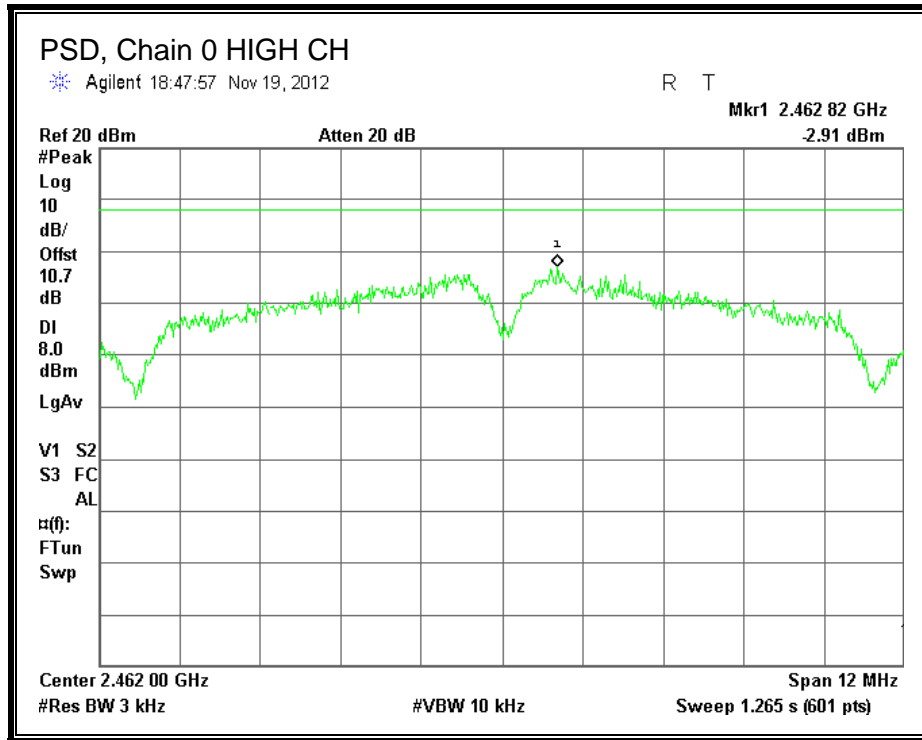

## **8.1.6. OUT-OF-BAND EMISSIONS**

### **LIMITS**

FCC §15.247 (d)

IC RSS-210 A8.5


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.

### **TEST PROCEDURE**


The transmitter output is connected to a spectrum analyzer with RBW = 100 kHz, VBW = 300 kHz, peak detector, and max hold. Measurements utilizing these settings are made of the in-band reference level, bandedge (where measurements to the general radiated limits will not be made) and out-of-band emissions.

## RESULTS


### IN-BAND REFERENCE LEVEL

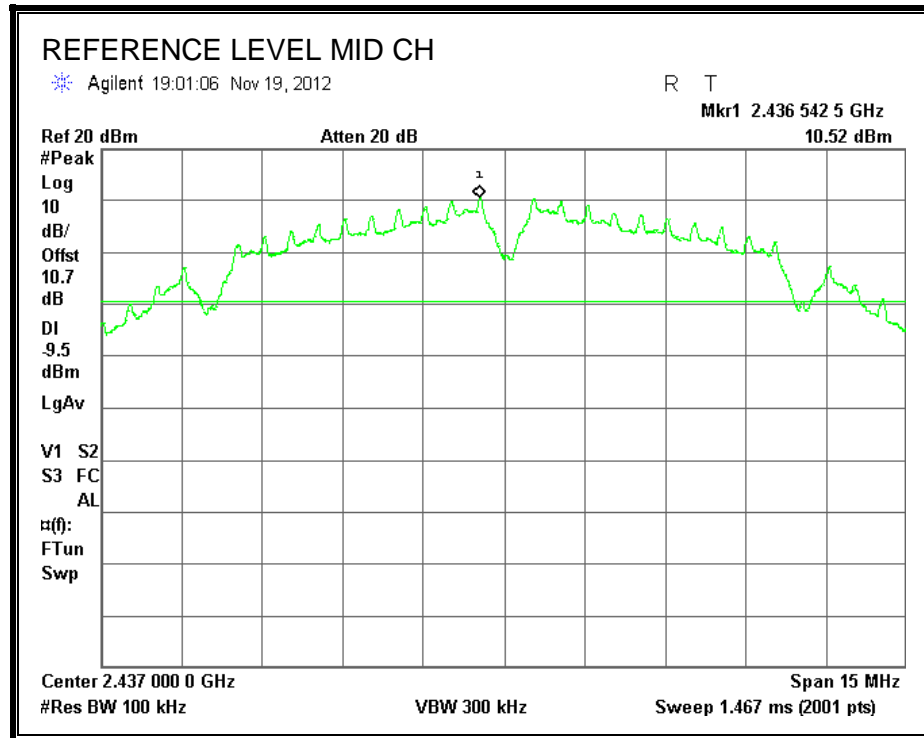



**LOW CHANNEL BANDEDGE**

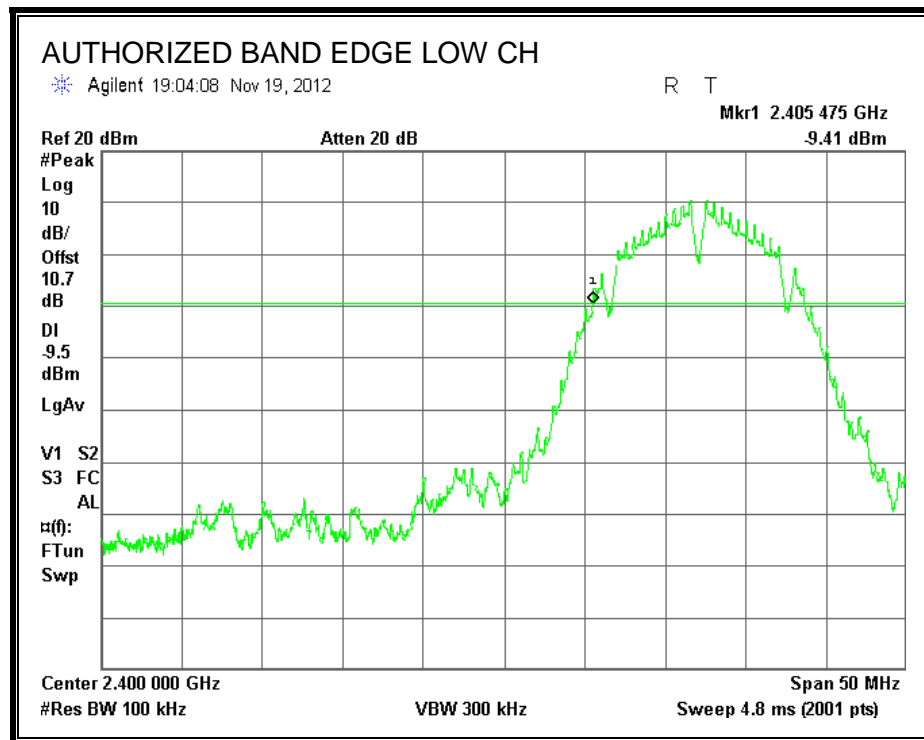


**HIGH CHANNEL BANDEDGE**

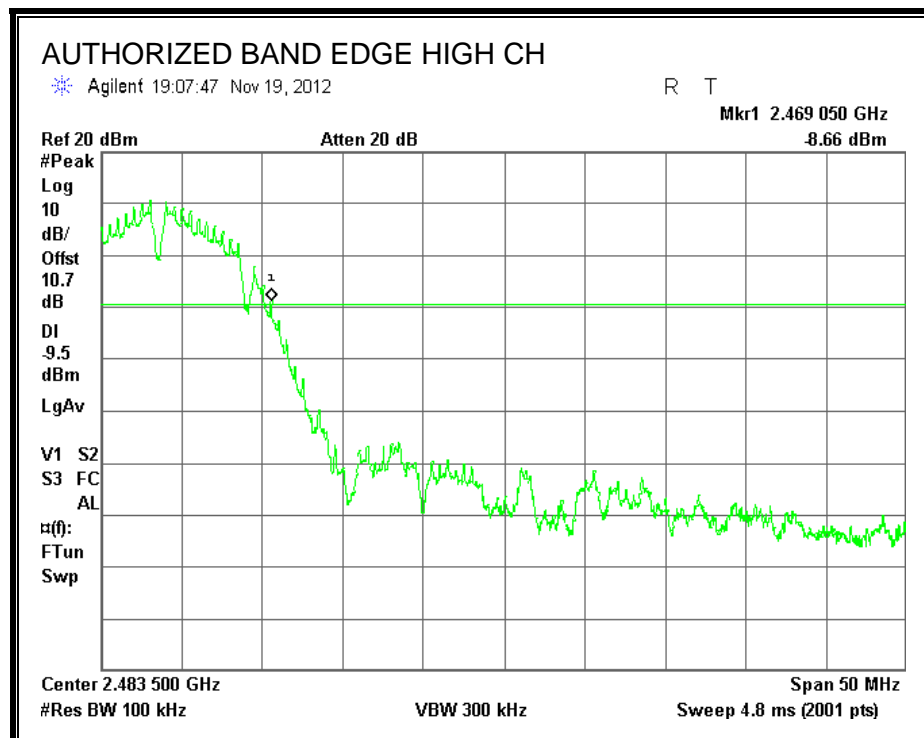

**OUT-OF-BAND EMISSIONS**

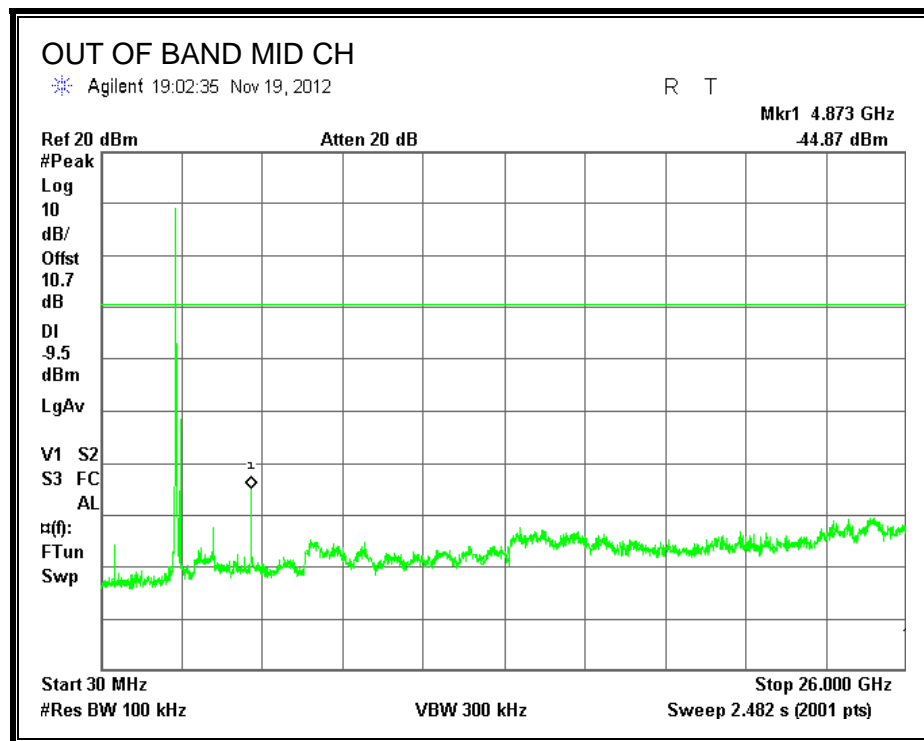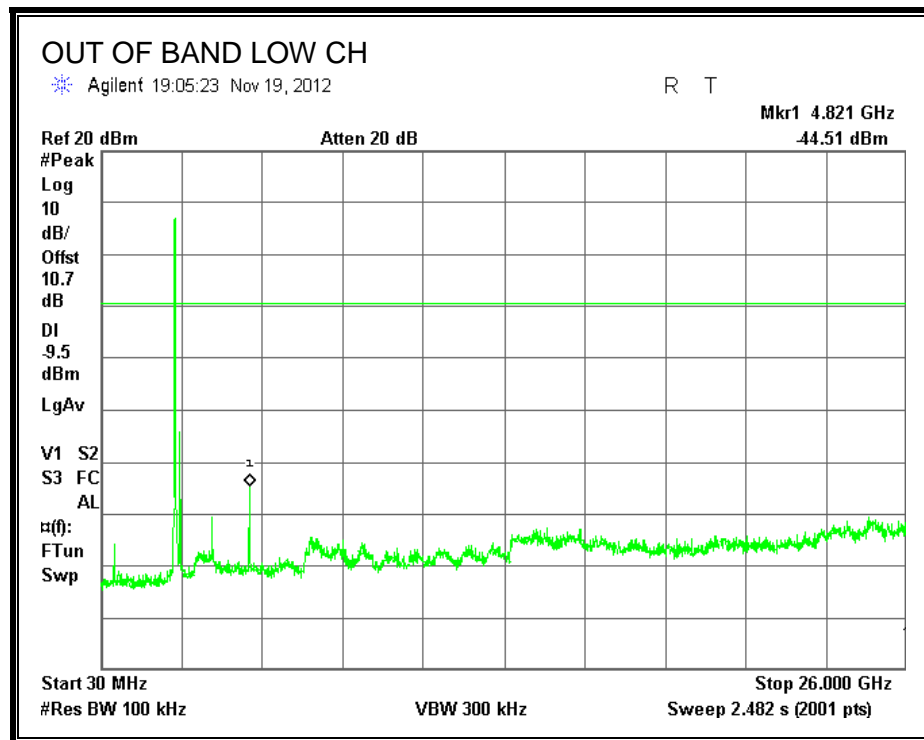



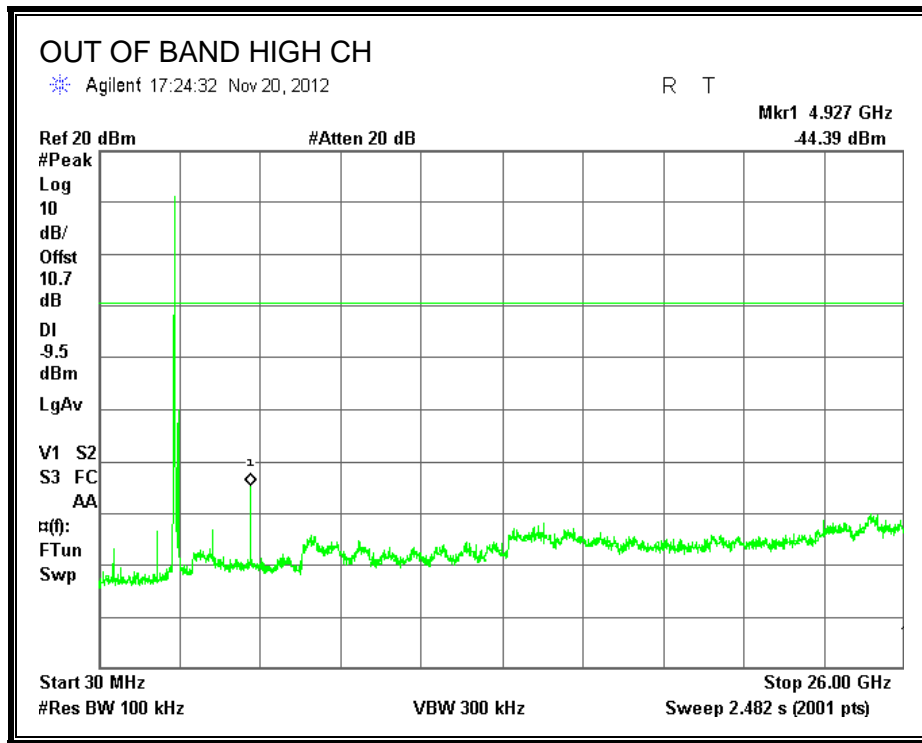

## **8.2. 802.11g MODE IN THE 2.4 GHz BAND**

### **8.2.1. 6 dB BANDWIDTH**

#### **LIMITS**

FCC §15.247 (a) (2)

IC RSS-210 A8.2 (a)

The minimum 6 dB bandwidth shall be at least 500 kHz.



#### **TEST PROCEDURE**


The transmitter output is connected to a spectrum analyzer with the RBW set between 1% and 5% of the EBW, the VBW  $\geq 3 \times$  RBW, peak detector and max hold.

#### **RESULTS**

Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
2412	15.330	0.5
2437	15.140	0.5
2462	15.290	0.5

**6 dB BANDWIDTH**

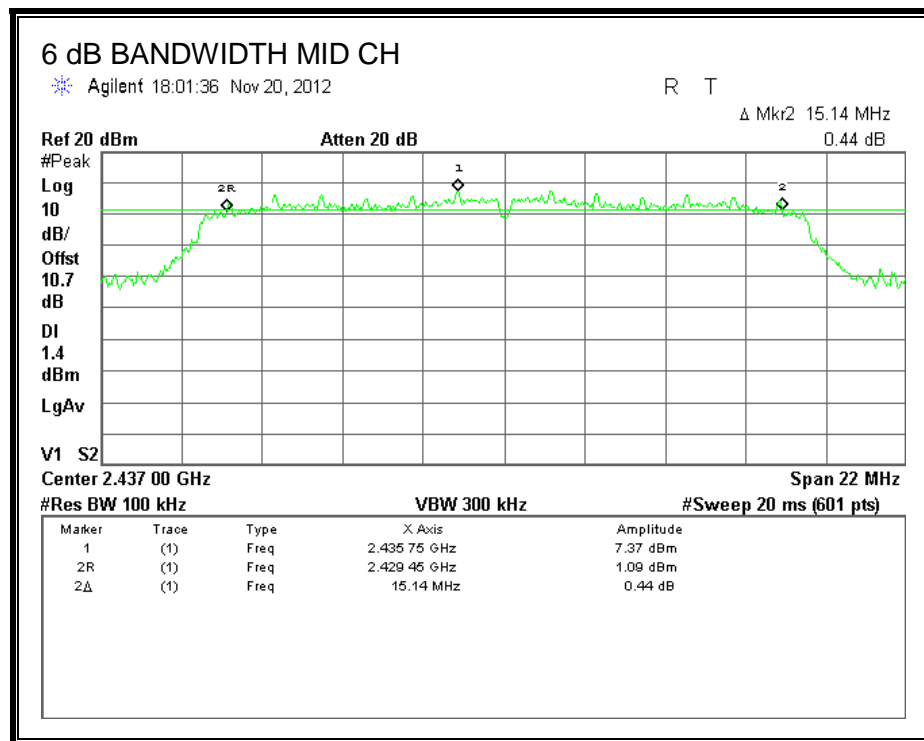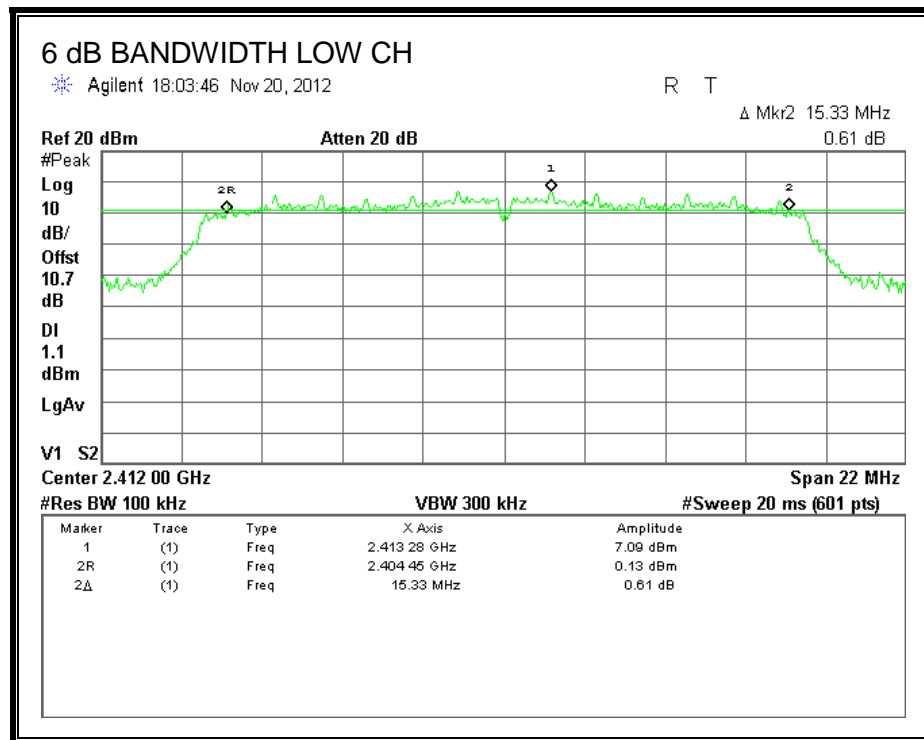

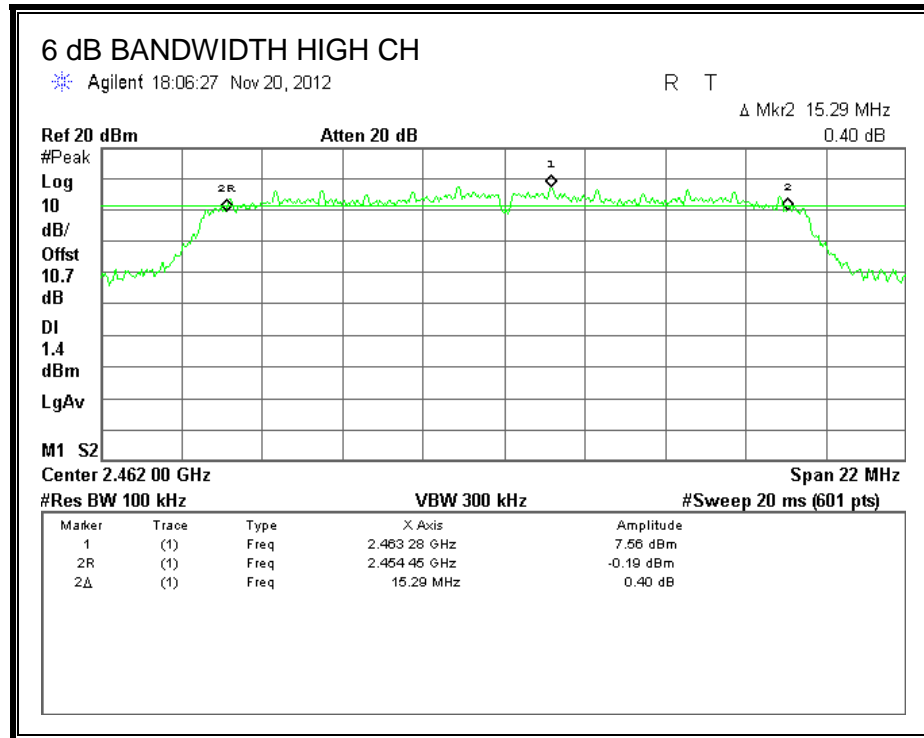

## 8.2.2. 99% BANDWIDTH

### LIMITS

None; for reporting purposes only.



### TEST PROCEDURE


The transmitter output is connected to the spectrum analyzer. The RBW is set to 1% to 3% of the 99 % bandwidth and to 1% of the span. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth function is utilized.

### RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2412	16.2833
Mid	2437	16.3078
High	2462	16.3101

**99% BANDWIDTH**

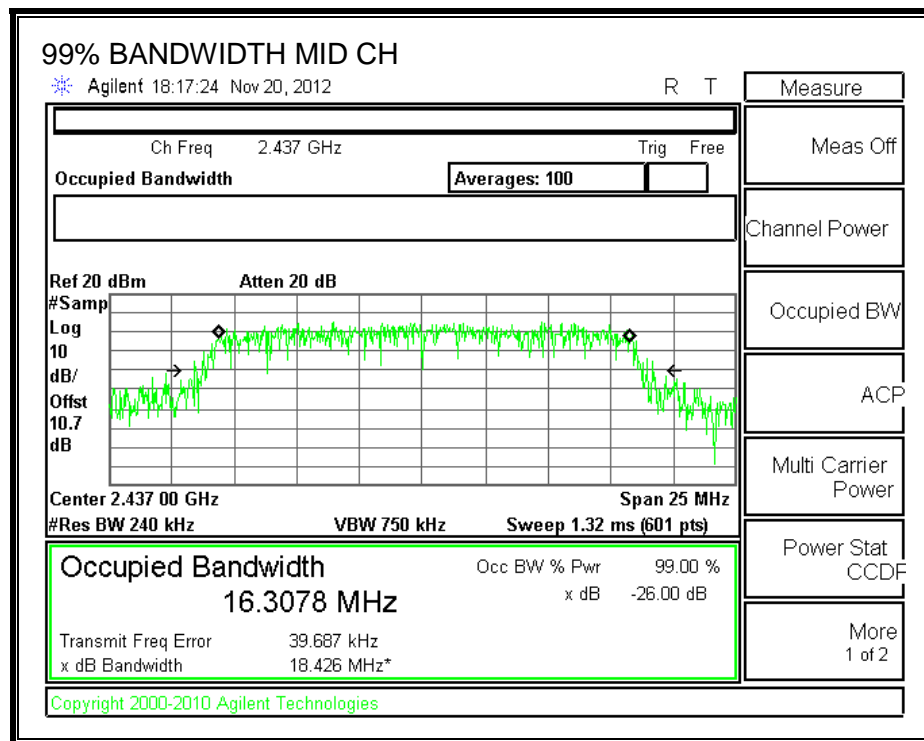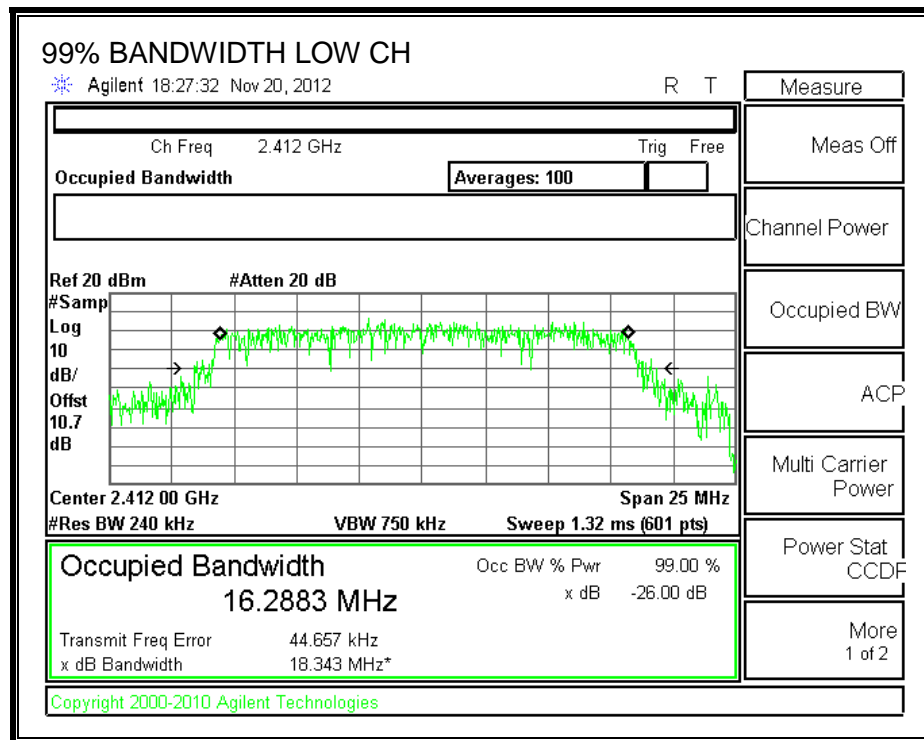

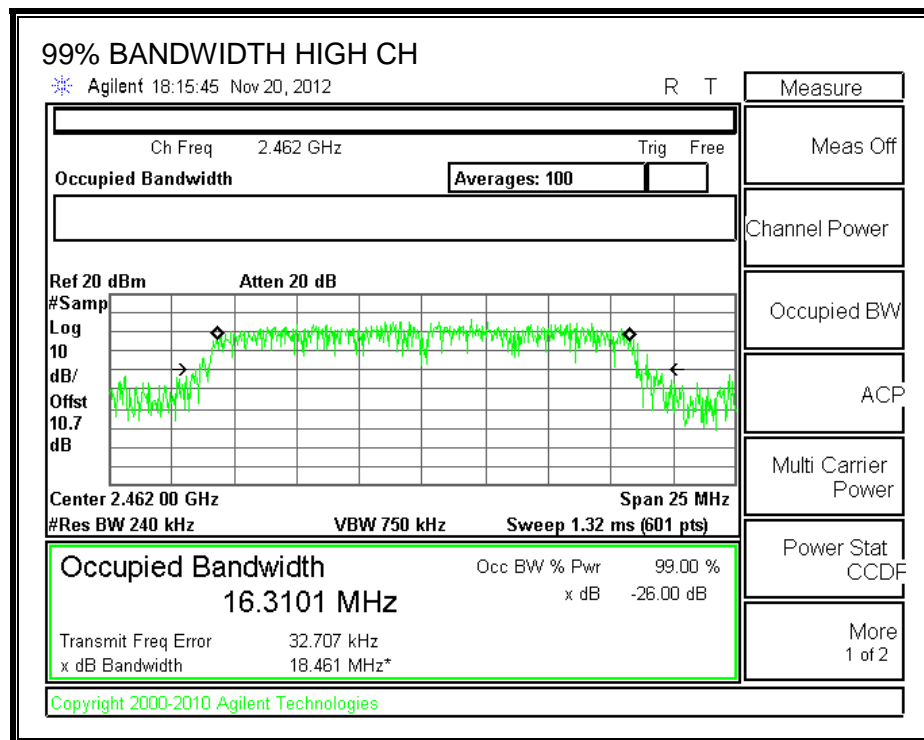

### 8.2.3. AVERAGE POWER

#### LIMITS

None; for reporting purposes only.

#### TEST PROCEDURE

The transmitter output is connected to a power meter.

The cable assembly insertion loss of 10.7 dB (including 10 dB pad and .7 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

#### RESULTS

Channel	Frequency (MHz)	Power (dBm)
Low	2412	14.70
Mid	2437	15.00
High	2462	15.00



## **8.2.4. OUTPUT POWER**

### **LIMITS**

FCC §15.247

IC RSS-210 A8.4

For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt, based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.



### **DIRECTIONAL ANTENNA GAIN**


There is only one transmitter output therefore the directional gain is equal to the antenna gain.

## **RESULTS**

<b>Channel</b>	<b>Frequency (MHz)</b>	<b>Chain 0 Meas Power (dBm)</b>	<b>Total Corr'd Power (dBm)</b>	<b>Power Limit (dBm)</b>	<b>Margin (dB)</b>
Low	2412	22.70	22.70	30.00	-7.30
Mid	2437	22.83	22.83	30.00	-7.17
High	2462	23.72	23.72	30.00	-6.28

**OUTPUT POWER, Chain 0**

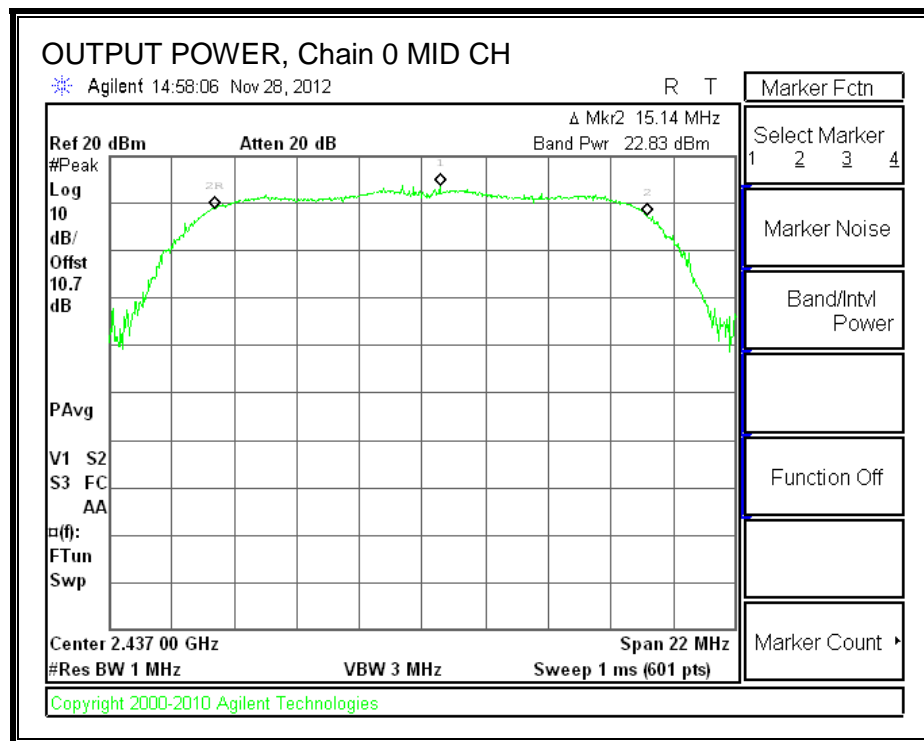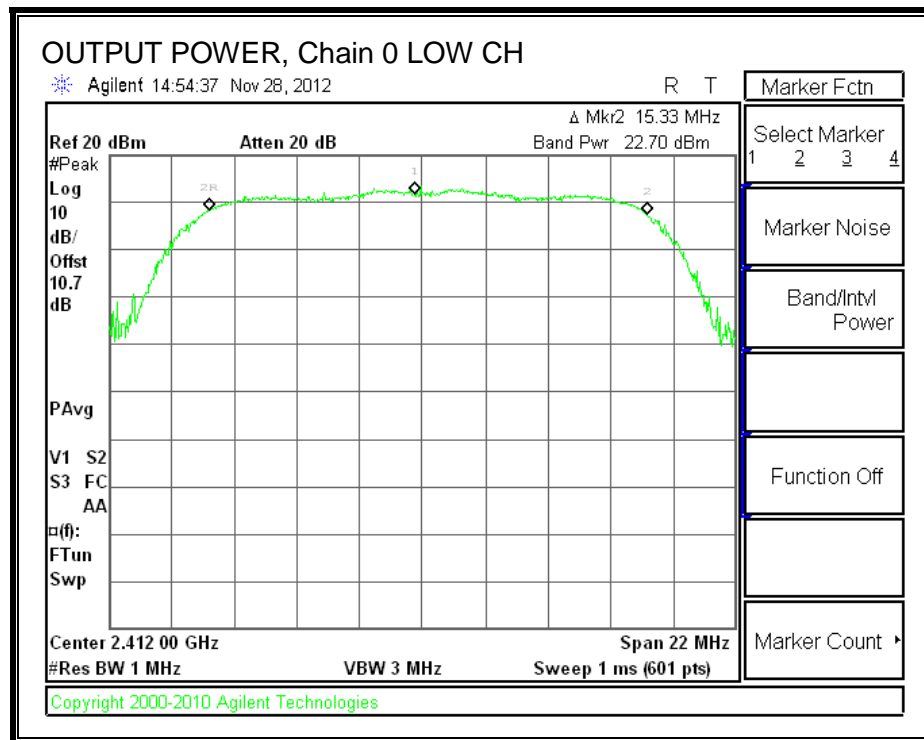

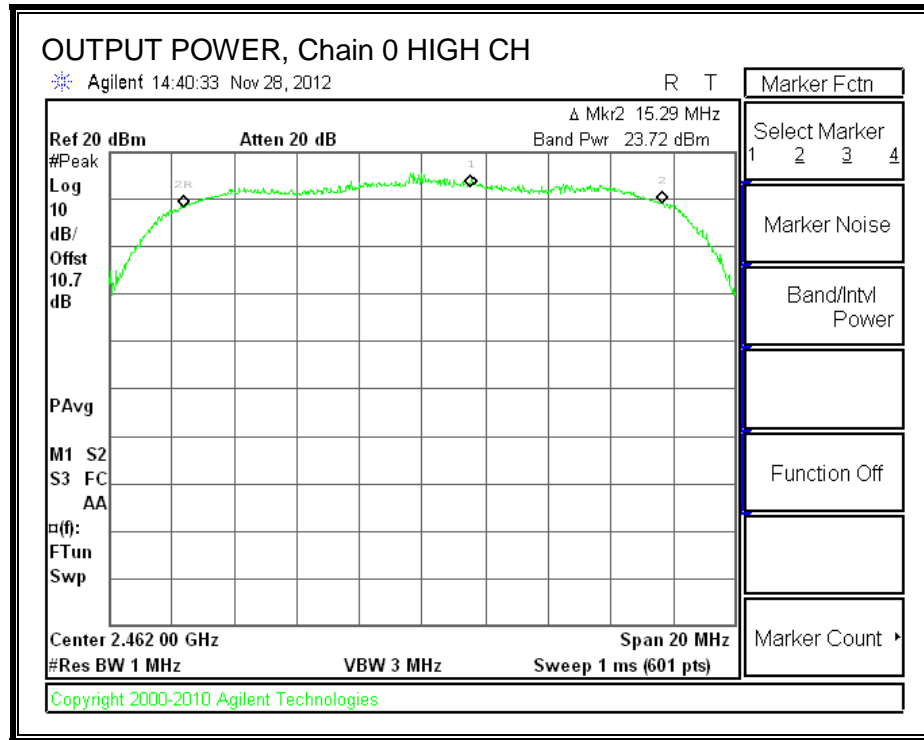

### 8.2.5. PSD

#### LIMITS

FCC §15.247

IC RSS-210 A8.2



The power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.


#### RESULTS

##### PSD Results

Channel	Frequency (MHz)	Chain 0 Meas (dBm)	Limit (dBm)	Margin (dB)
Low	2412	-9.47	8.0	-17.5
Mid	2437	-8.59	8.0	-16.6
High	2462	-9.32	8.0	-17.3

**PSD, Chain 0**

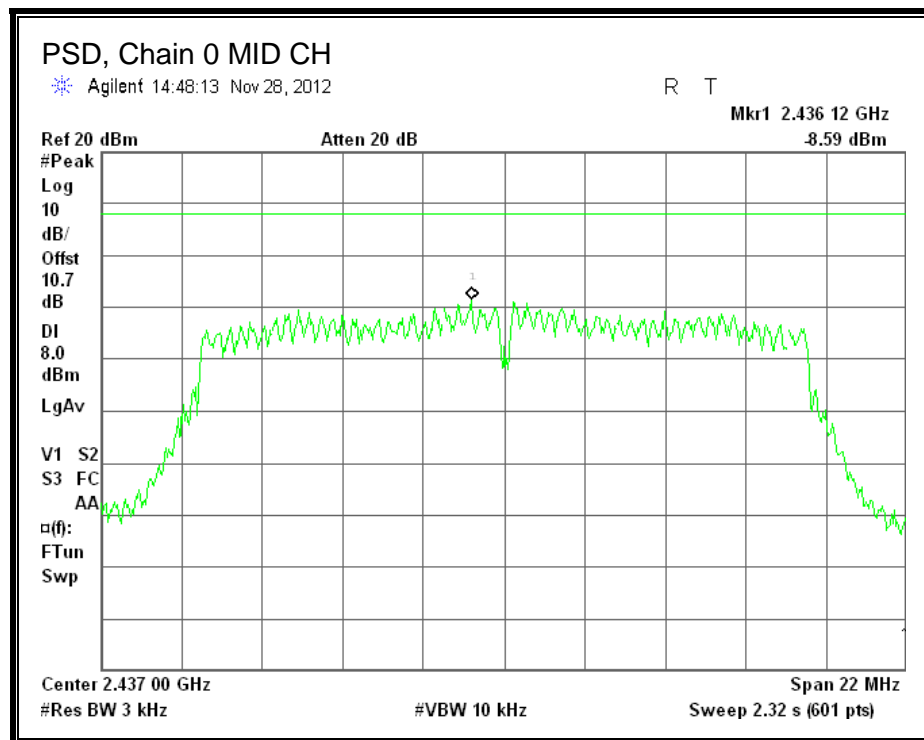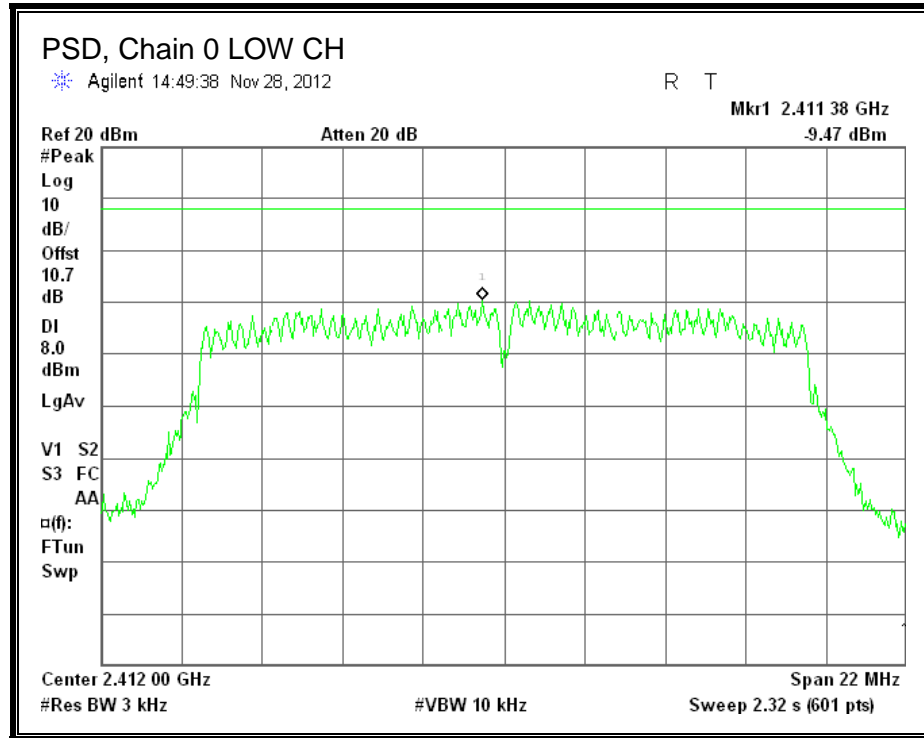

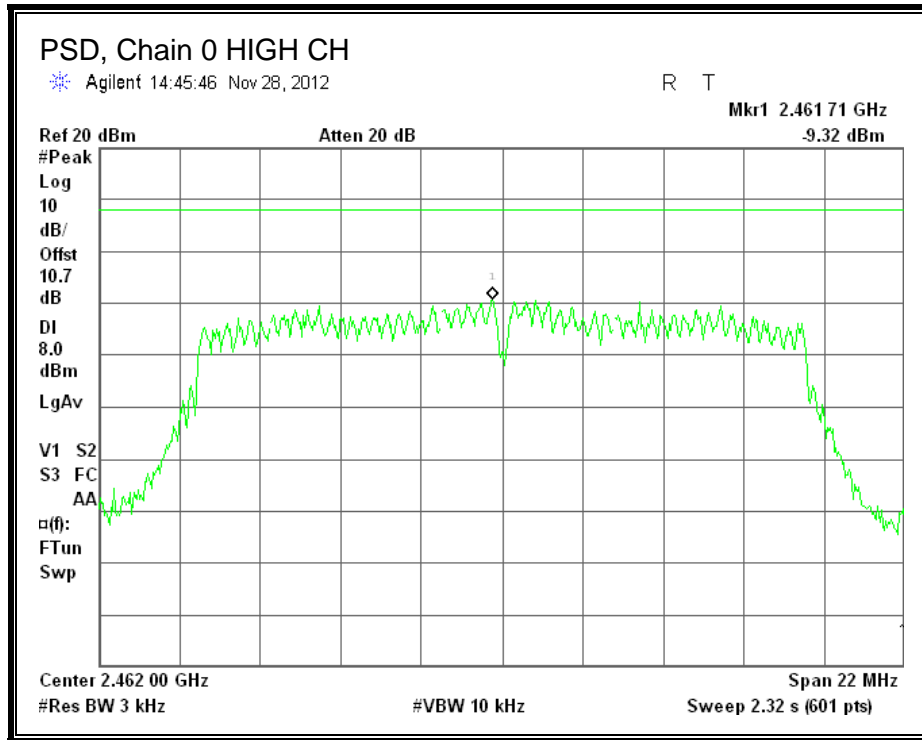

## **8.2.6. OUT-OF-BAND EMISSIONS**

### **LIMITS**

FCC §15.247 (d)

IC RSS-210 A8.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.


### **TEST PROCEDURE**

The transmitter output is connected to a spectrum analyzer with RBW = 100 kHz, VBW = 300 kHz, peak detector, and max hold. Measurements utilizing these settings are made of the in-band reference level, bandedge (where measurements to the general radiated limits will not be made) and out-of-band emissions.




## RESULTS


### IN-BAND REFERENCE LEVEL

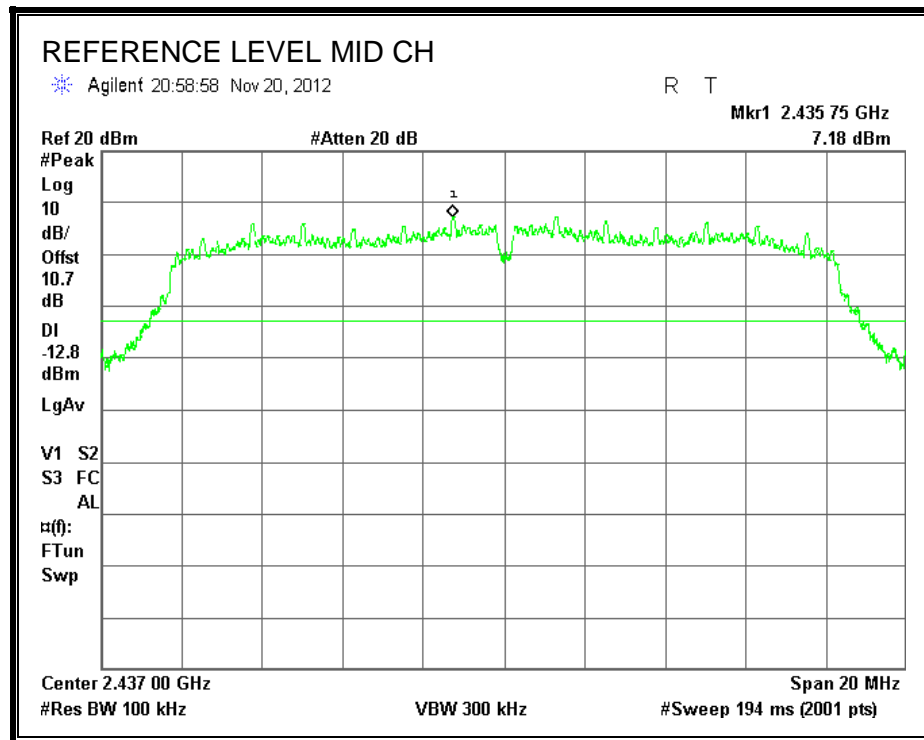



### LOW CHANNEL BANDEDGE

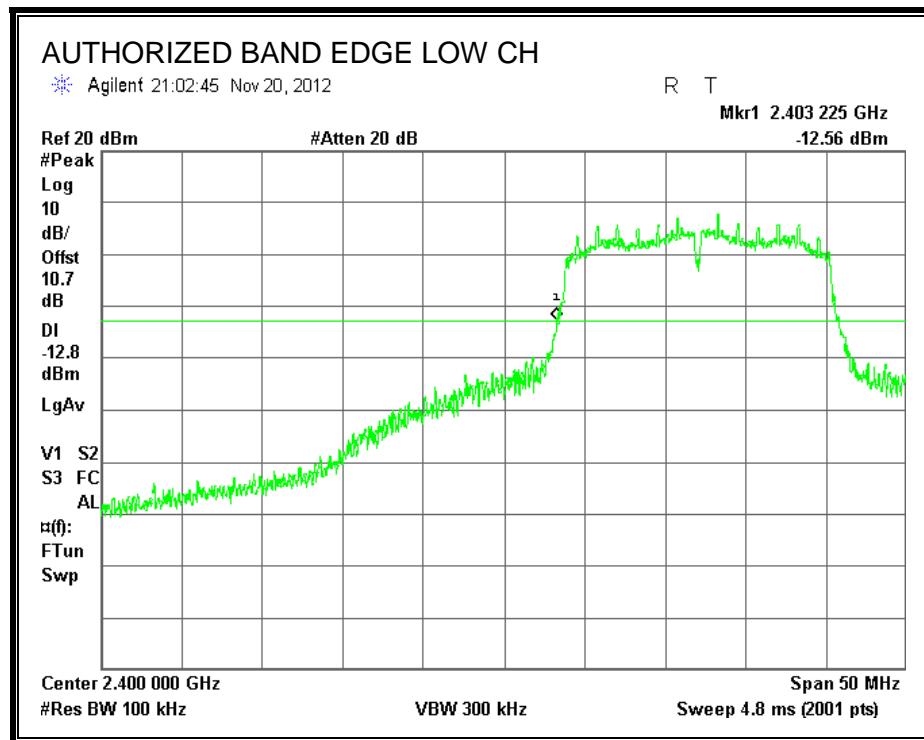


### HIGH CHANNEL BANDEDGE

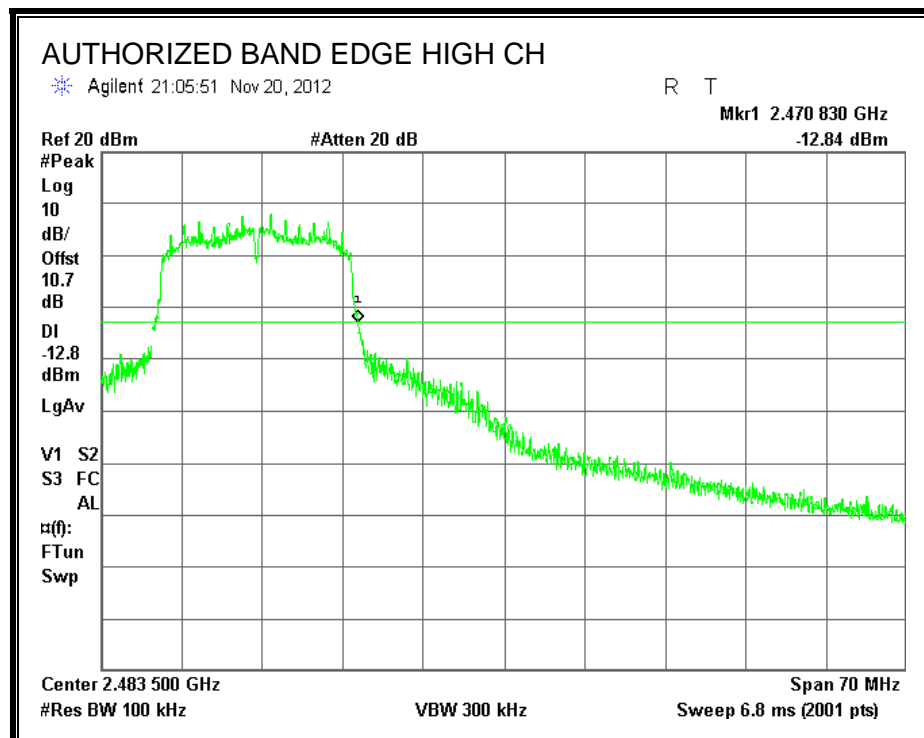

**OUT-OF-BAND EMISSIONS**

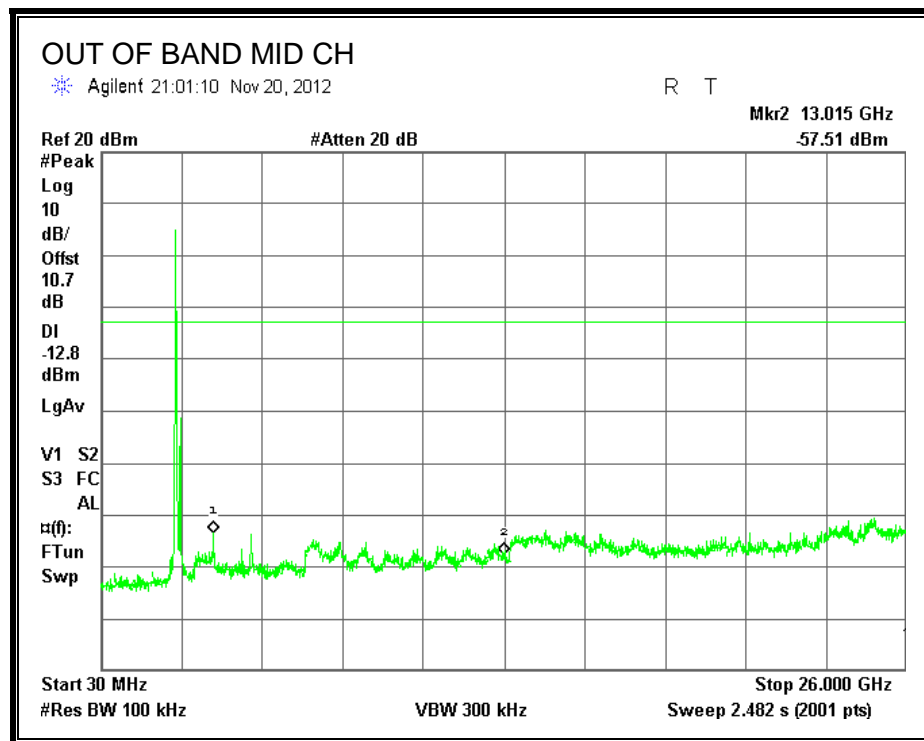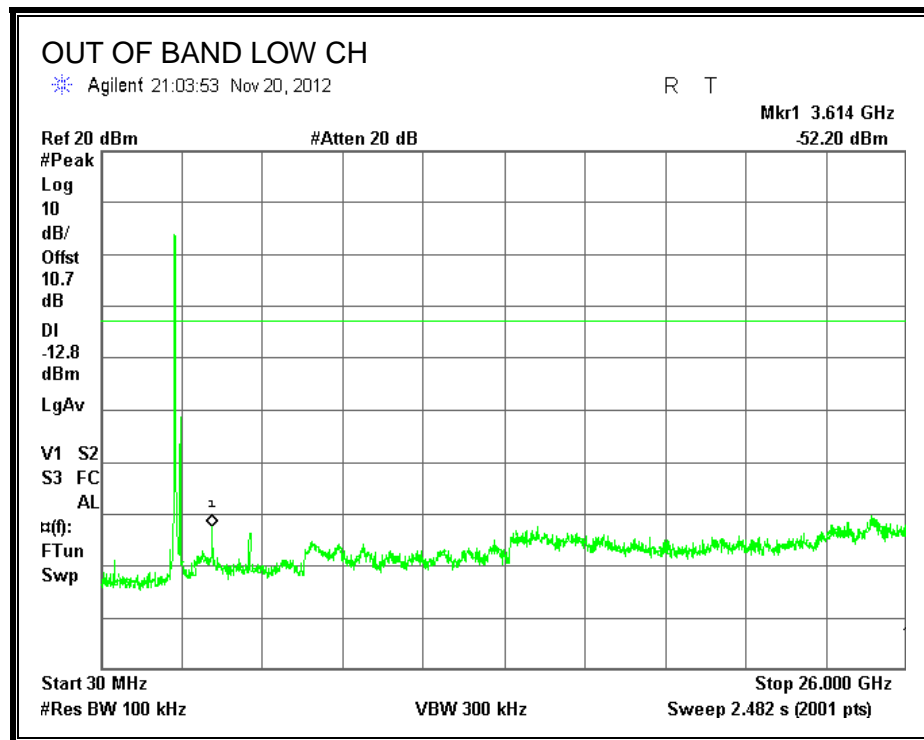

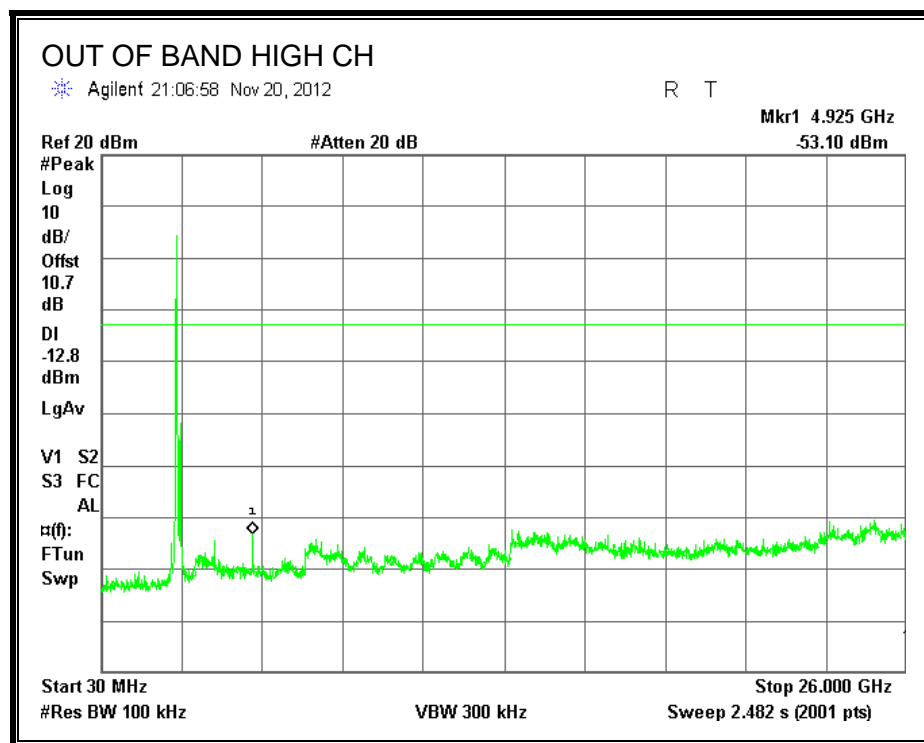

## 9. RADIATED TEST RESULTS

### 9.1. LIMITS AND PROCEDURE

#### LIMITS

FCC §15.205 and §15.209

IC RSS-210 Clause 2.6 (Transmitter)

IC RSS-GEN Clause 6 (Receiver)

Frequency Range (MHz)	Field Strength Limit ( $\mu\text{V/m}$ ) at 3 m	Field Strength Limit (dB $\mu\text{V/m}$ ) at 3 m
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

#### TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 1 MHz for peak measurements and as applicable for average measurements.



The spectrum from 30 MHz to 40 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in each applicable band.



The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

## 9.2. TRANSMITTER ABOVE 1 GHz



### 9.2.1. TX ABOVE 1 GHz 802.11b MODE IN THE 2.4 GHz BAND

#### RESTRICTED BANDEDGE (LOW CHANNEL)

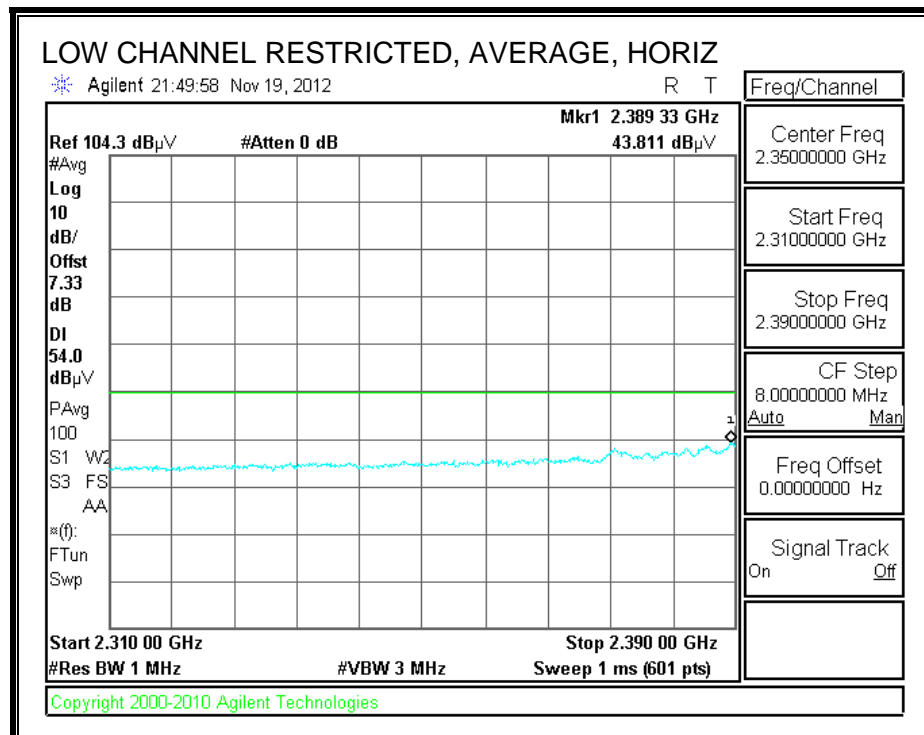
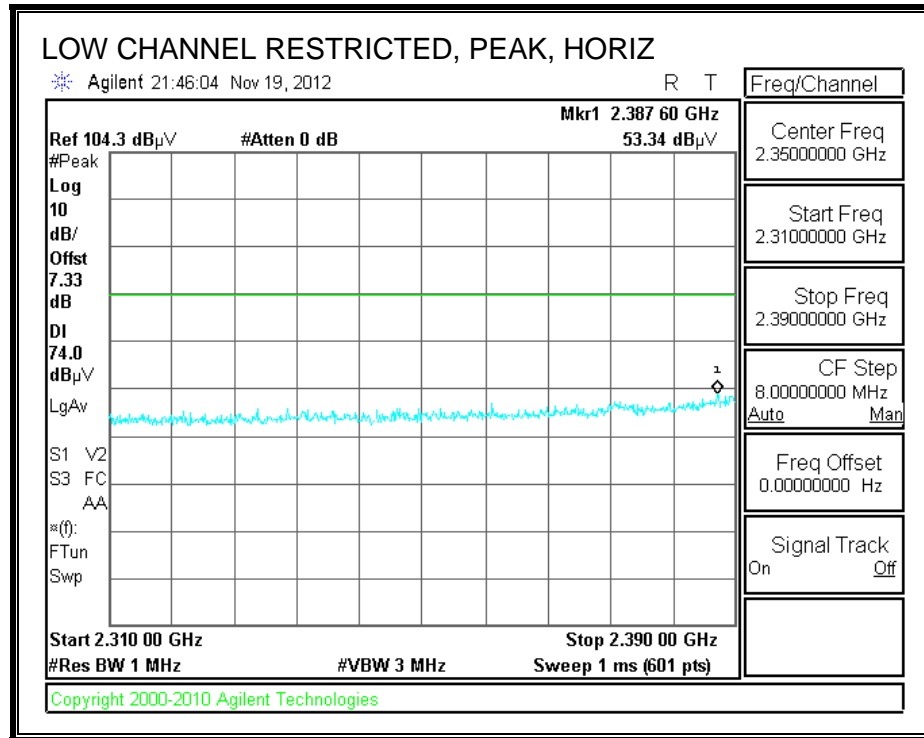


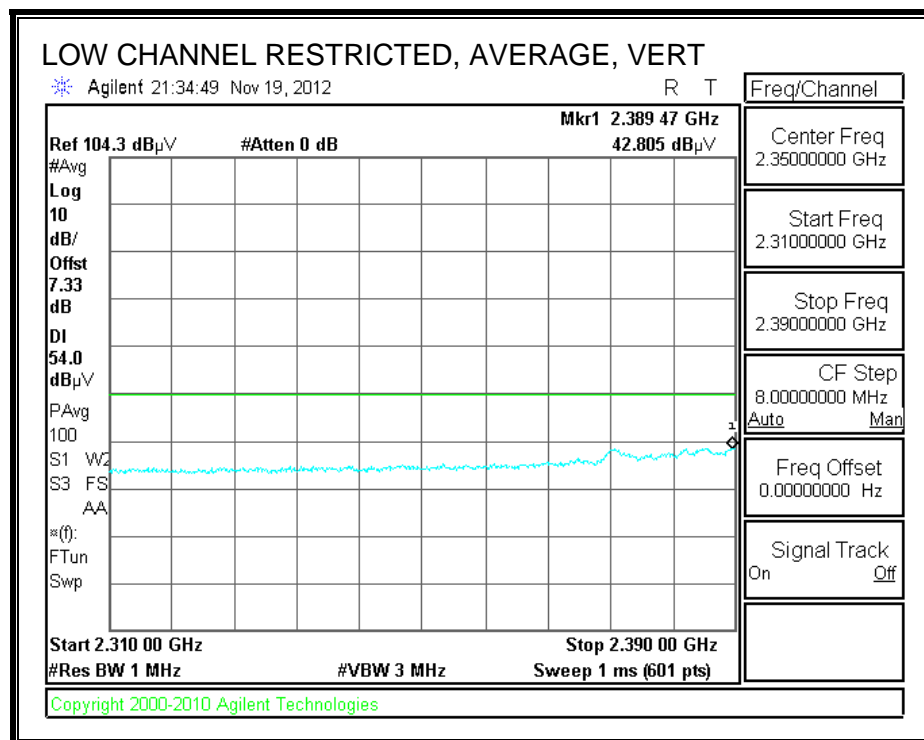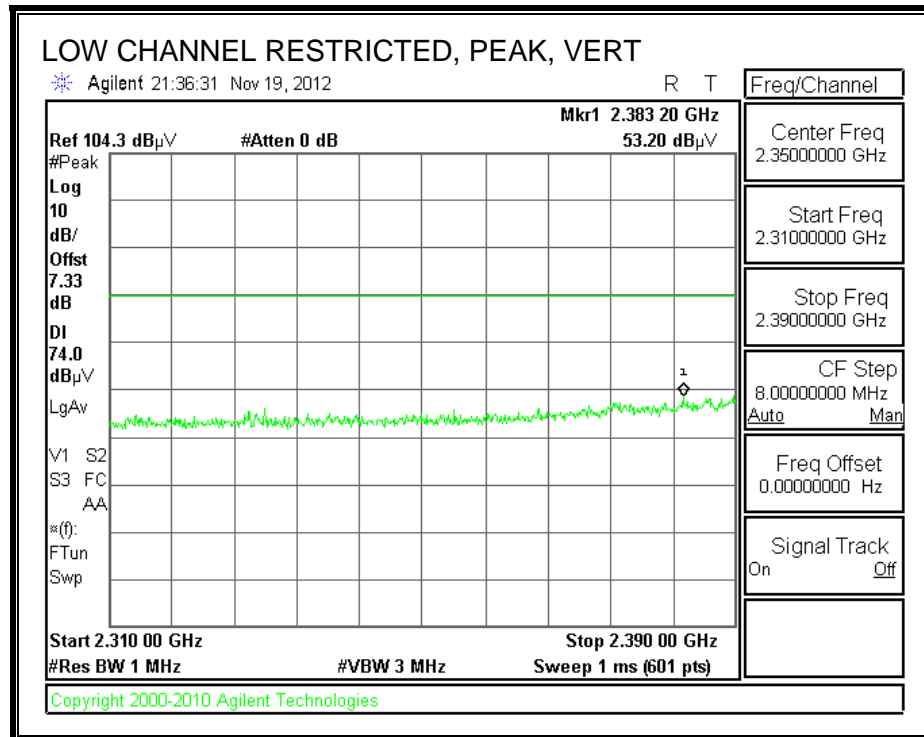

**AUTHORIZED BANDEDGE (HIGH CHANNEL)**

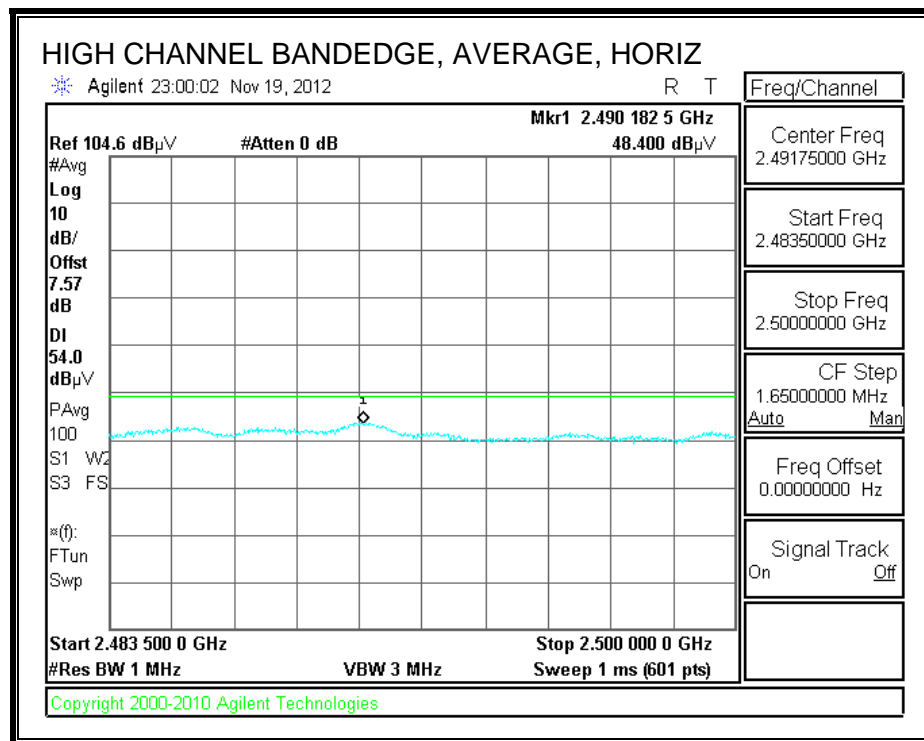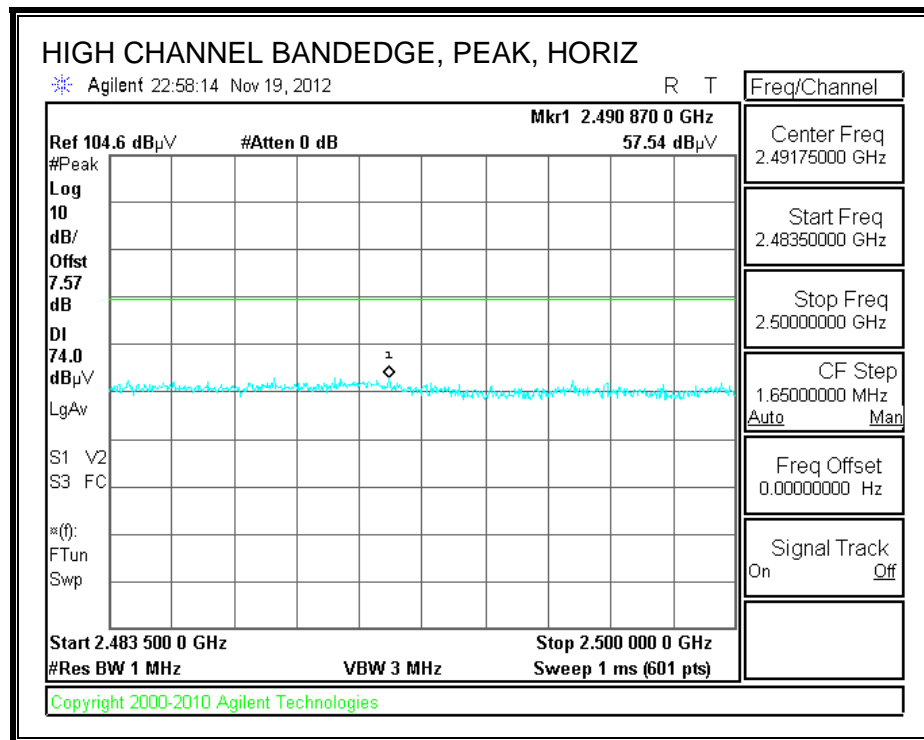



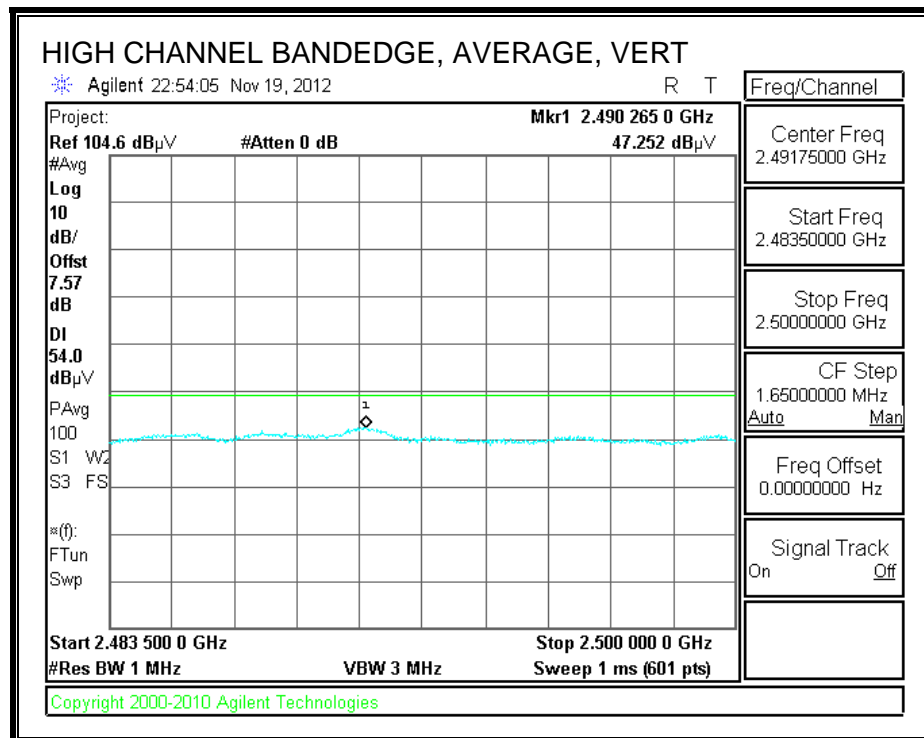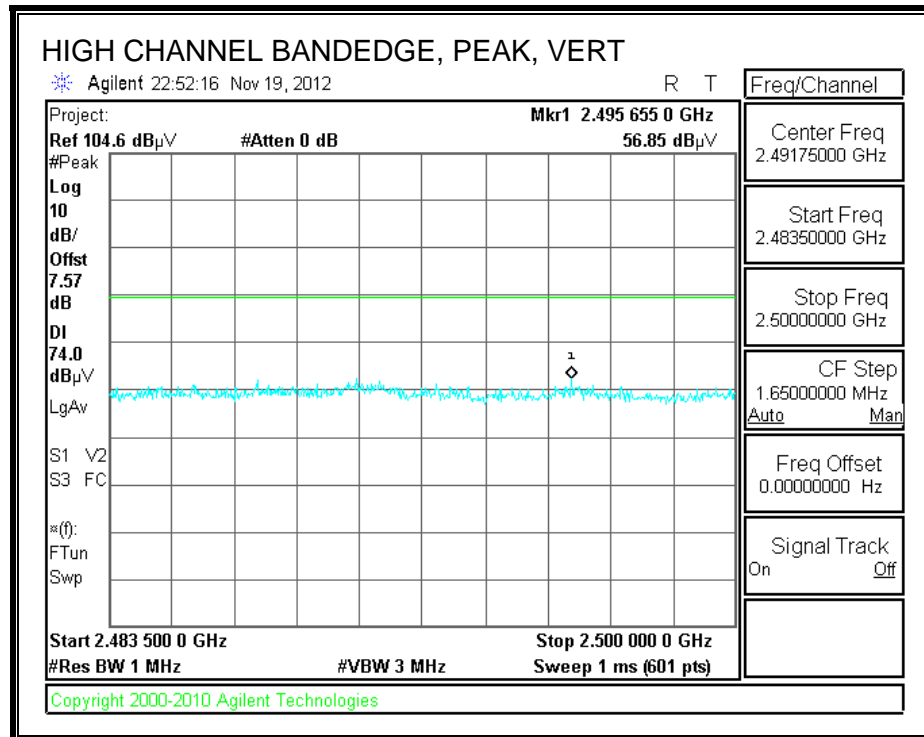



# HARMONICS AND SPURIOUS EMISSIONS

High Frequency Measurement																	
Compliance Certification Services, Fremont 3m Chamber																	
Company:		GOOGLE															
Project #:		12U14656															
Date:		11/19/2012															
Test Engineer:		Thanh Nguyen															
Configuration:		EUT at worst case															
Mode:		Transmit b mode															
Test Equipment:																	
Horn 1-18GHz			Pre-amplifier 1-26GHz			Pre-amplifier 26-40GHz			Horn > 18GHz			Limit					
T60; S/N: 2238 @3m			T34 HP 8449B									FCC 15.209					
Hi Frequency Cables																	
3' cable 22807700			12' cable 22807600			20' cable 22807500			HPF			Reject Filter			Peak Measurements RBW=VBW=1MHz		
3' cable 22807700			12' cable 22807600			20' cable 22807500						R_001			Average Measurements RBW=1MHz ; VBW=10Hz		
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filtr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)		
<b>Low Ch</b>																	
4.824	3.0	40.1	32.8	33.1	6.8	-34.1	0.0	0.0	46.0	38.7	74	54	-28.0	-15.3	H		
7.236	3.0	35.0	27.0	36.2	8.9	-34.2	0.0	0.0	45.9	37.9	74	54	-28.1	-16.1	H		
9.648	3.0	34.6	25.1	38.3	10.5	-34.5	0.0	0.0	48.9	39.5	74	54	-25.1	-14.5	Noise floor		
4.824	3.0	40.8	32.2	33.1	6.8	-34.1	0.0	0.0	46.6	38.1	74	54	-27.4	-15.9	V		
7.236	3.0	37.1	30.7	36.2	8.9	-34.2	0.0	0.0	48.0	41.6	74	54	-26.0	-12.4	V		
9.648	3.0	35.1	27.3	38.3	10.5	-34.5	0.0	0.0	49.5	41.6	74	54	-24.5	-12.4	Noise floor		
<b>Mid Ch</b>																	
4.874	3.0	40.5	33.0	33.2	6.8	-34.1	0.0	0.0	46.4	39.0	74	54	-27.6	-15.0	V		
7.311	3.0	37.0	26.2	36.3	8.9	-34.2	0.0	0.0	48.0	37.2	74	54	-26.0	-16.8	V		
9.748	3.0	35.7	25.1	38.3	10.5	-34.5	0.0	0.0	50.0	39.5	74	54	-24.0	-14.5	Noise floor		
4.874	3.0	40.3	31.8	33.2	6.8	-34.1	0.0	0.0	46.3	37.7	74	54	-27.7	-16.3	H		
7.311	3.0	36.5	28.4	36.3	8.9	-34.2	0.0	0.0	47.5	39.5	74	54	-26.5	-14.5	H		
9.748	3.0	35.3	27.6	38.3	10.5	-34.5	0.0	0.0	49.7	42.0	74	54	-24.3	-12.0	Noise floor		
<b>High ch</b>																	
4.924	3.0	38.9	33.3	33.2	6.9	-34.1	0.0	0.0	44.9	39.3	74	54	-29.1	-14.7	H		
7.386	3.0	38.3	26.5	36.4	9.0	-34.2	0.0	0.0	49.5	37.7	74	54	-24.5	-16.3	H		
9.847	3.0	37.8	25.1	38.3	10.6	-34.5	0.0	0.0	52.2	39.5	74	54	-21.8	-14.5	Noise floor		
4.924	3.0	38.9	30.7	33.2	6.9	-34.1	0.0	0.0	45.0	36.7	74	54	-29.0	-17.3	V		
7.386	3.0	35.5	25.9	36.4	9.0	-34.2	0.0	0.0	46.7	37.1	74	54	-27.3	-16.9	V		
9.847	3.0	35.6	25.1	38.3	10.6	-34.5	0.0	0.0	50.0	39.5	74	54	-24.0	-14.5	Noise floor		
No other emissions were detected above the system noise floor.																	
Rev. 11.10.11																	
f	Measurement Frequency					Amp	Preamp Gain					Avg Lim	Average Field Strength Limit				
Dist	Distance to Antenna					D Corr	Distance Correct to 3 meters					Pk Lim	Peak Field Strength Limit				
Read	Analyzer Reading					Avg	Average Field Strength @ 3 m					Avg Mar	Margin vs. Average Limit				
AF	Antenna Factor					Peak	Calculated Peak Field Strength					Pk Mar	Margin vs. Peak Limit				
CL	Cable Loss					HPF	High Pass Filter										


### 9.3. TX ABOVE 1 GHz 802.11g MODE IN THE 2.4 GHz BAND


#### RESTRICTED BANDEDGE (LOW CHANNEL)

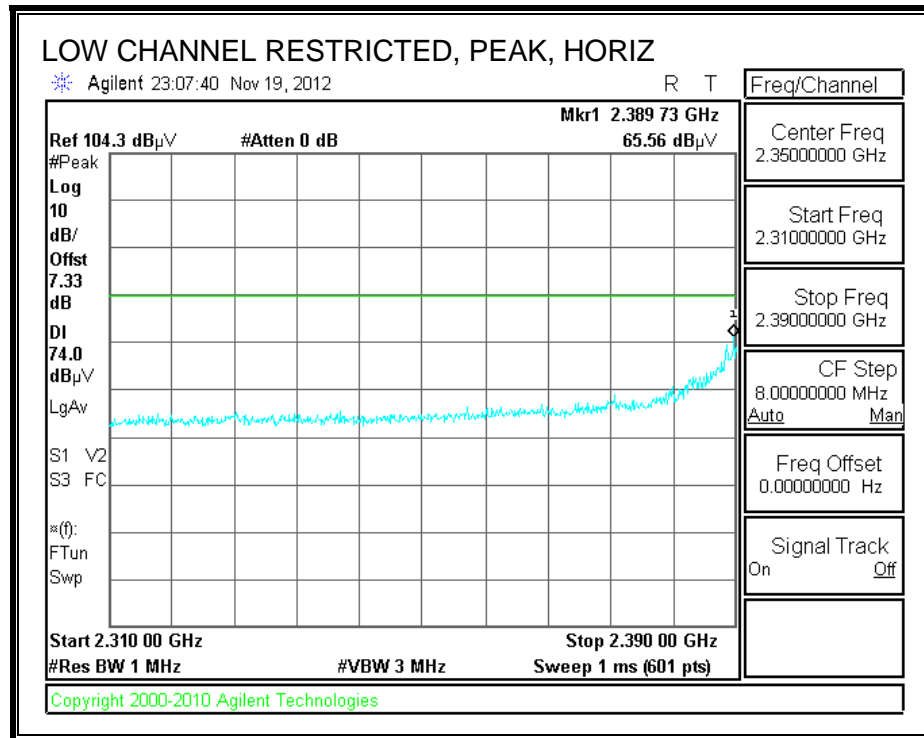

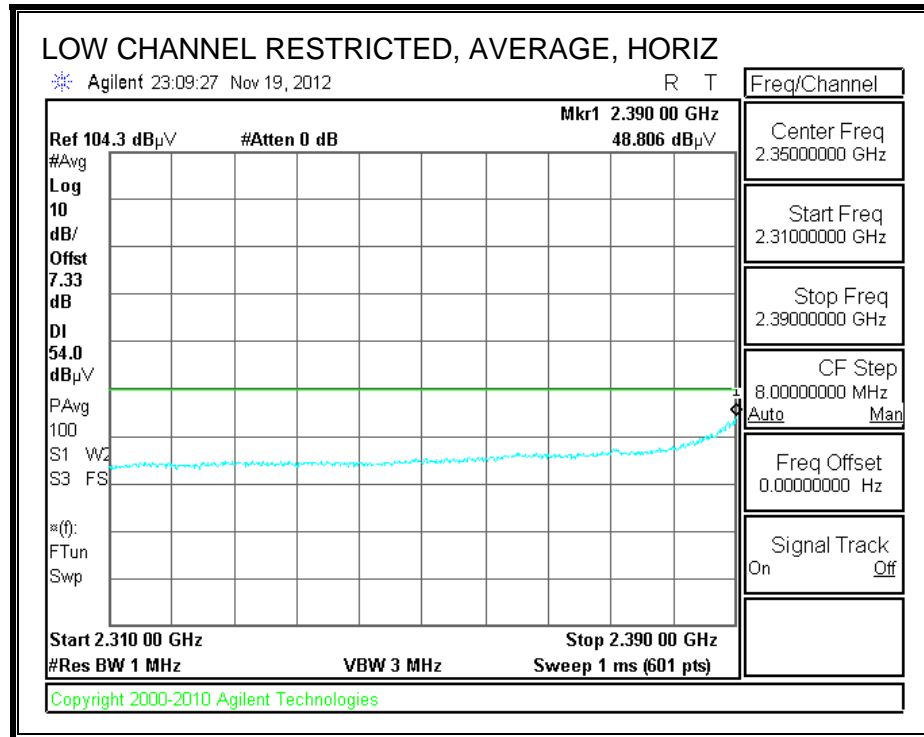


$$\begin{aligned}
 \text{Actual Average} &= \text{Measured Average} + \text{Correction Factor} \\
 &= 48.806 \text{ dB}\mu\text{V} + .11 \\
 &= 48.916 \text{ dB}\mu\text{V}
 \end{aligned}$$

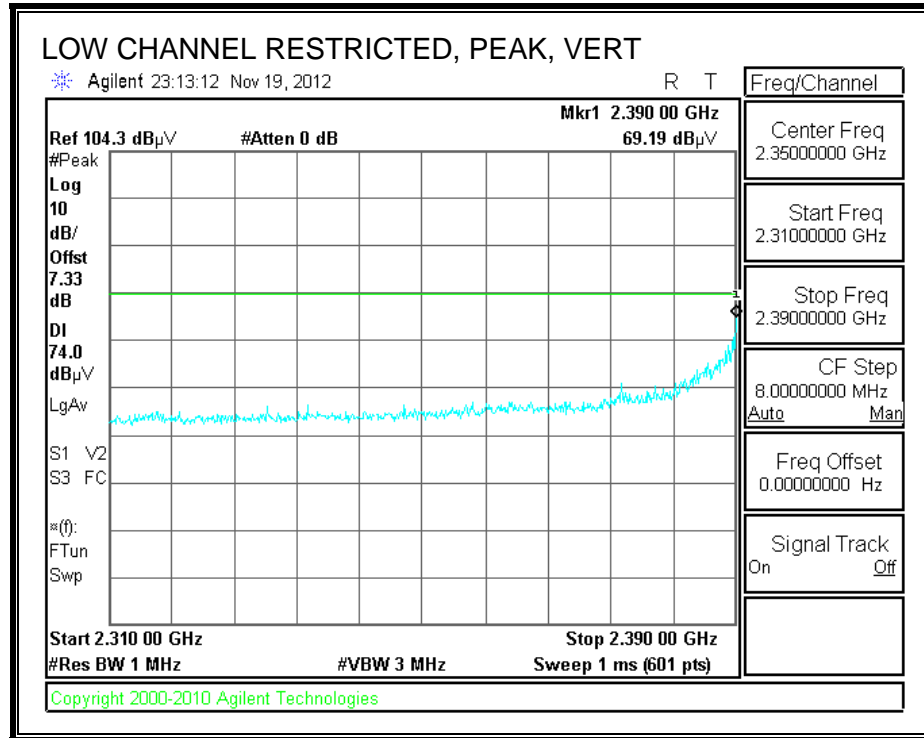


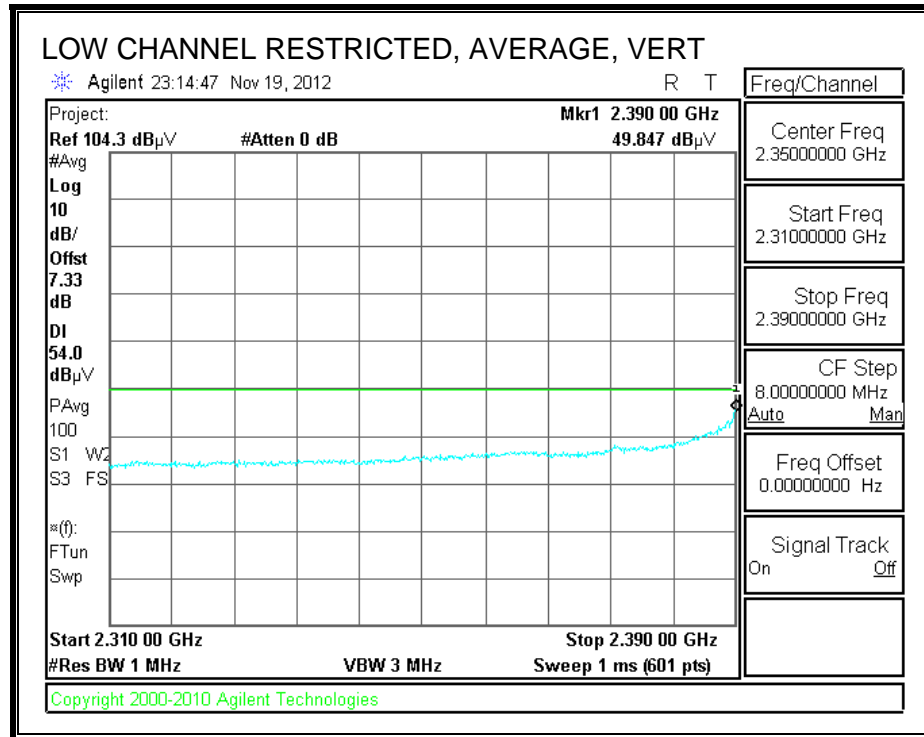

$$\begin{aligned}
 \text{Actual Average} &= \text{Measured Average} + \text{Correction Factor} \\
 &= 49.847 \text{ dB}\mu\text{V} + .11 \\
 &= 49.957 \text{ dB}\mu\text{V}
 \end{aligned}$$


**AUTHORIZED BANDEDGE (HIGH CHANNEL)**

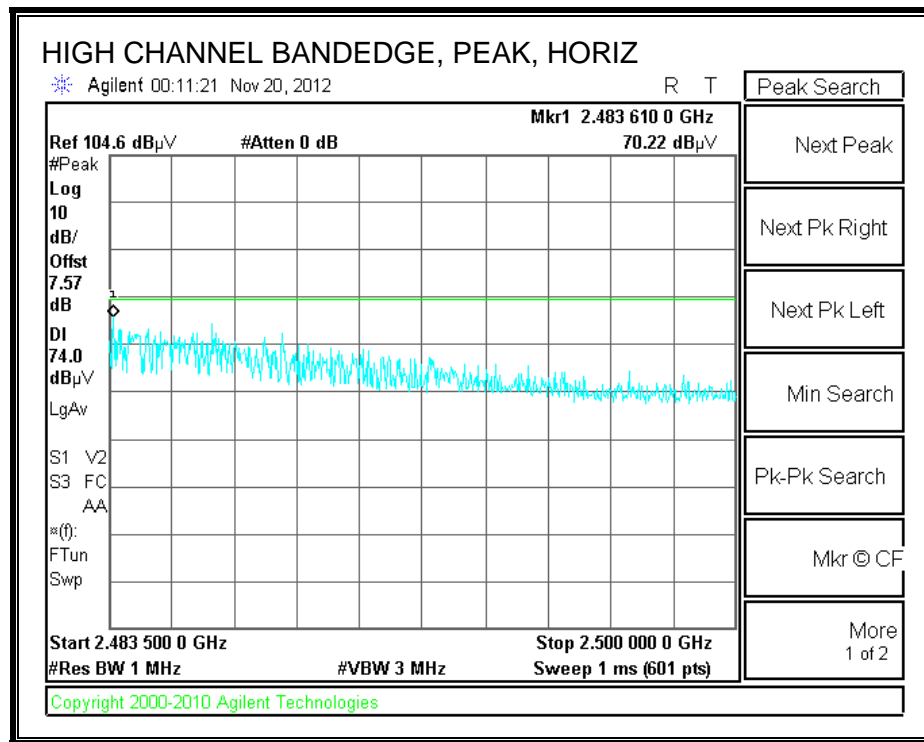


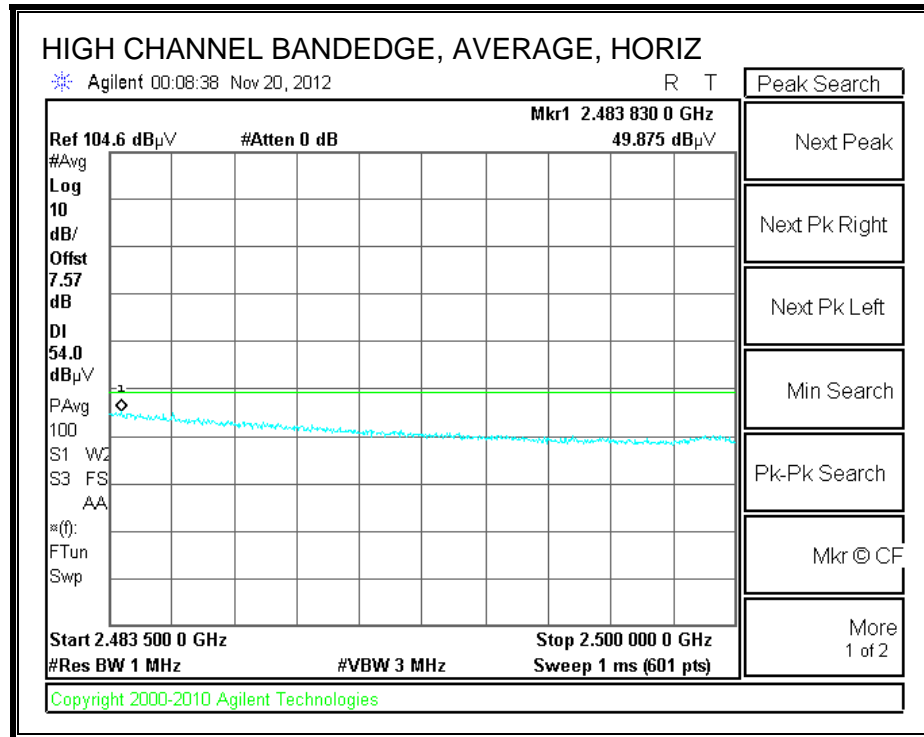

$$\begin{aligned}
 \text{Actual Average} &= \text{Measured Average} + \text{Correction Factor} \\
 &= 49.875 \text{ dB}\mu\text{V} + .11 \\
 &= 49.985 \text{ dB}\mu\text{V}
 \end{aligned}$$



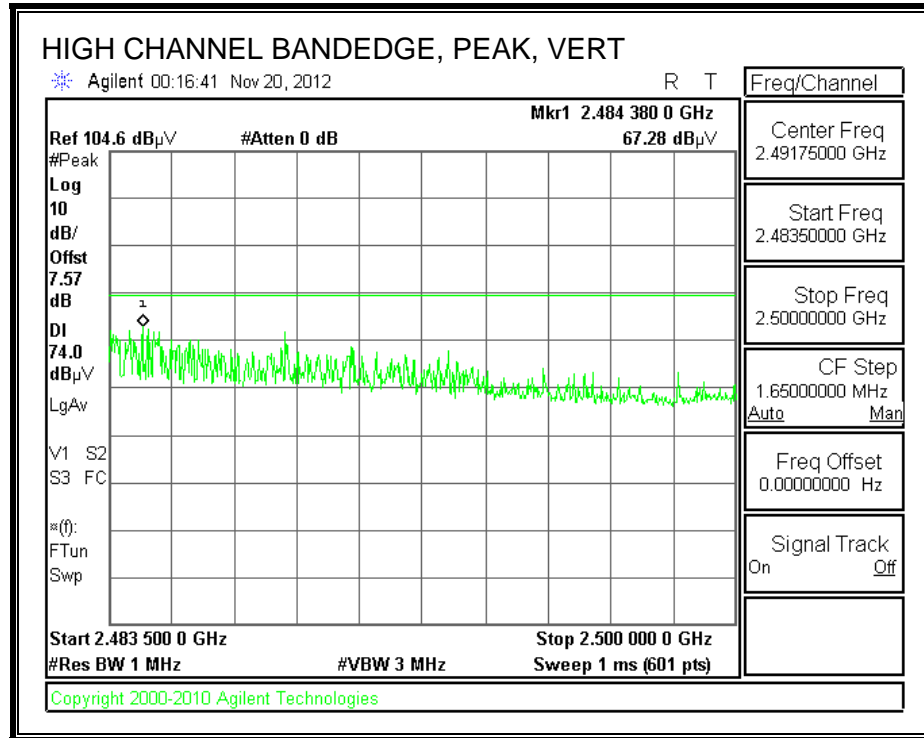

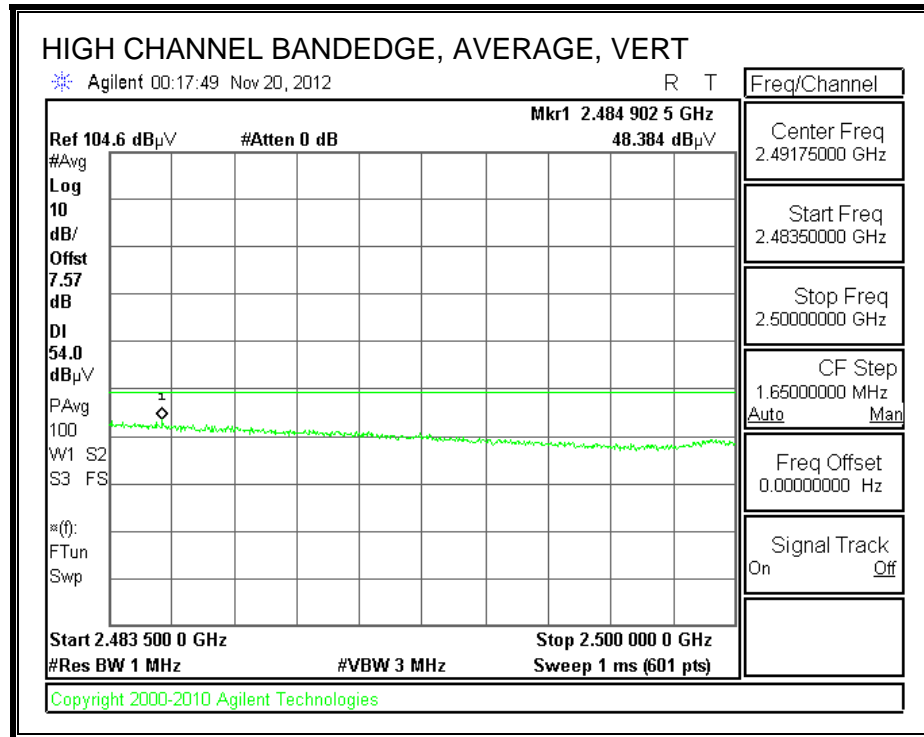


$$\begin{aligned}
 \text{Actual Average} &= \text{Measured Average} + \text{Correction Factor} \\
 &= 48.384 \text{ dBuV} + .11 \\
 &= 48.494 \text{ dBuV}
 \end{aligned}$$

# HARMONICS AND SPURIOUS EMISSIONS

High Frequency Measurement															
Compliance Certification Services, Fremont 3m Chamber															
Company:		GOOGLE													
Project #:		12U14656													
Date:		11/19/2012													
Test Engineer:		Thanh Nguyen													
Configuration:		EUT at worst case													
Mode:		Transmit g mode													
Test Equipment:															
Horn 1-18GHz			Pre-amplifier 1-26GHz			Pre-amplifier 26-40GHz			Horn > 18GHz			Limit			
T60; S/N: 2238 @3m			T34 HP 8449B									FCC 15.209			
Hi Frequency Cables															
3' cable 22807700			12' cable 22807600			20' cable 22807500			HPF			Reject Filter			
3' cable 22807700			12' cable 22807600			20' cable 22807500						R_001			
<div> <div>Peak Measurements</div> <div>RBW=VBW=1MHz</div> <div>Average Measurements</div> <div>RBW=1MHz ; VBW=10Hz</div> </div>															
f	Dist	Read Pk	Read Avg.	AF	CL	Amp	D Corr	Filtr	Peak	Avg	Pk Lim	Avg Lim	Pk Mar	Avg Mar	Notes
GHz	(m)	dBuV	dBuV	dB/m	dB	dB	dB	dB	dBuV/m	dBuV/m	dBuV/m	dBuV/m	dB	dB	(V/H)
<b>Low Ch</b>															
4.824	3.0	41.3	29.9	33.1	6.8	-34.1	0.0	0.0	47.1	35.7	74	54	-26.9	-18.3	V
7.236	3.0	42.0	31.0	36.2	8.9	-34.2	0.0	0.0	52.9	41.9	74	54	-21.1	-12.1	V
9.648	3.0	39.8	29.7	38.3	10.5	-34.5	0.0	0.0	54.2	44.0	74	54	-19.8	-10.0	Noise floor
4.824	3.0	41.7	30.0	33.1	6.8	-34.1	0.0	0.0	47.6	35.9	74	54	-26.4	-18.1	H
7.236	3.0	42.1	30.8	36.2	8.9	-34.2	0.0	0.0	53.0	41.7	74	54	-21.0	-12.3	H
9.648	3.0	42.1	31.0	38.3	10.5	-34.5	0.0	0.0	56.4	45.3	74	54	-17.6	-8.7	Noise floor
<b>Mid Ch</b>															
4.874	3.0	40.5	32.9	33.2	6.8	-34.1	0.0	0.0	46.4	38.8	74	54	-27.6	-15.2	V
7.311	3.0	37.1	26.2	36.3	8.9	-34.2	0.0	0.0	48.1	37.2	74	54	-25.9	-16.8	V
9.748	3.0	35.6	25.1	38.3	10.5	-34.5	0.0	0.0	50.0	39.5	74	54	-24.0	-14.5	Noise floor
4.874	3.0	40.4	32.2	33.2	6.8	-34.1	0.0	0.0	46.4	38.2	74	54	-27.6	-15.8	H
7.311	3.0	36.4	28.5	36.3	8.9	-34.2	0.0	0.0	47.5	39.5	74	54	-26.5	-14.5	H
9.748	3.0	35.4	27.5	38.3	10.5	-34.5	0.0	0.0	49.8	41.9	74	54	-24.2	-12.1	Noise floor
<b>High ch</b>															
4.924	3.0	38.9	33.3	33.2	6.9	-34.1	0.0	0.0	44.9	39.3	74	54	-29.1	-14.7	H
7.386	3.0	38.3	26.5	36.4	9.0	-34.2	0.0	0.0	49.5	37.7	74	54	-24.5	-16.3	H
9.847	3.0	37.8	25.1	38.3	10.6	-34.5	0.0	0.0	52.2	39.5	74	54	-21.8	-14.5	Noise floor
4.924	3.0	38.9	30.7	33.2	6.9	-34.1	0.0	0.0	45.0	36.7	74	54	-29.0	-17.3	V
7.386	3.0	35.5	25.9	36.4	9.0	-34.2	0.0	0.0	46.7	37.1	74	54	-27.3	-16.9	V
9.847	3.0	35.6	25.1	38.3	10.6	-34.5	0.0	0.0	50.0	39.5	74	54	-24.0	-14.5	Noise floor
No other emissions were detected above the system noise floor.															
Rev. 11.10.11															
f	Measurement Frequency					Amp	Preamp Gain					Avg Lim	Average Field Strength Limit		
Dist	Distance to Antenna					D Corr	Distance Correct to 3 meters					Pk Lim	Peak Field Strength Limit		
Read	Analyzer Reading					Avg	Average Field Strength @ 3 m					Avg Mar	Margin vs. Average Limit		
AF	Antenna Factor					Peak	Calculated Peak Field Strength					Pk Mar	Margin vs. Peak Limit		
CL	Cable Loss					HPF	High Pass Filter								

## 9.4. WORST-CASE BELOW 1 GHz

### SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

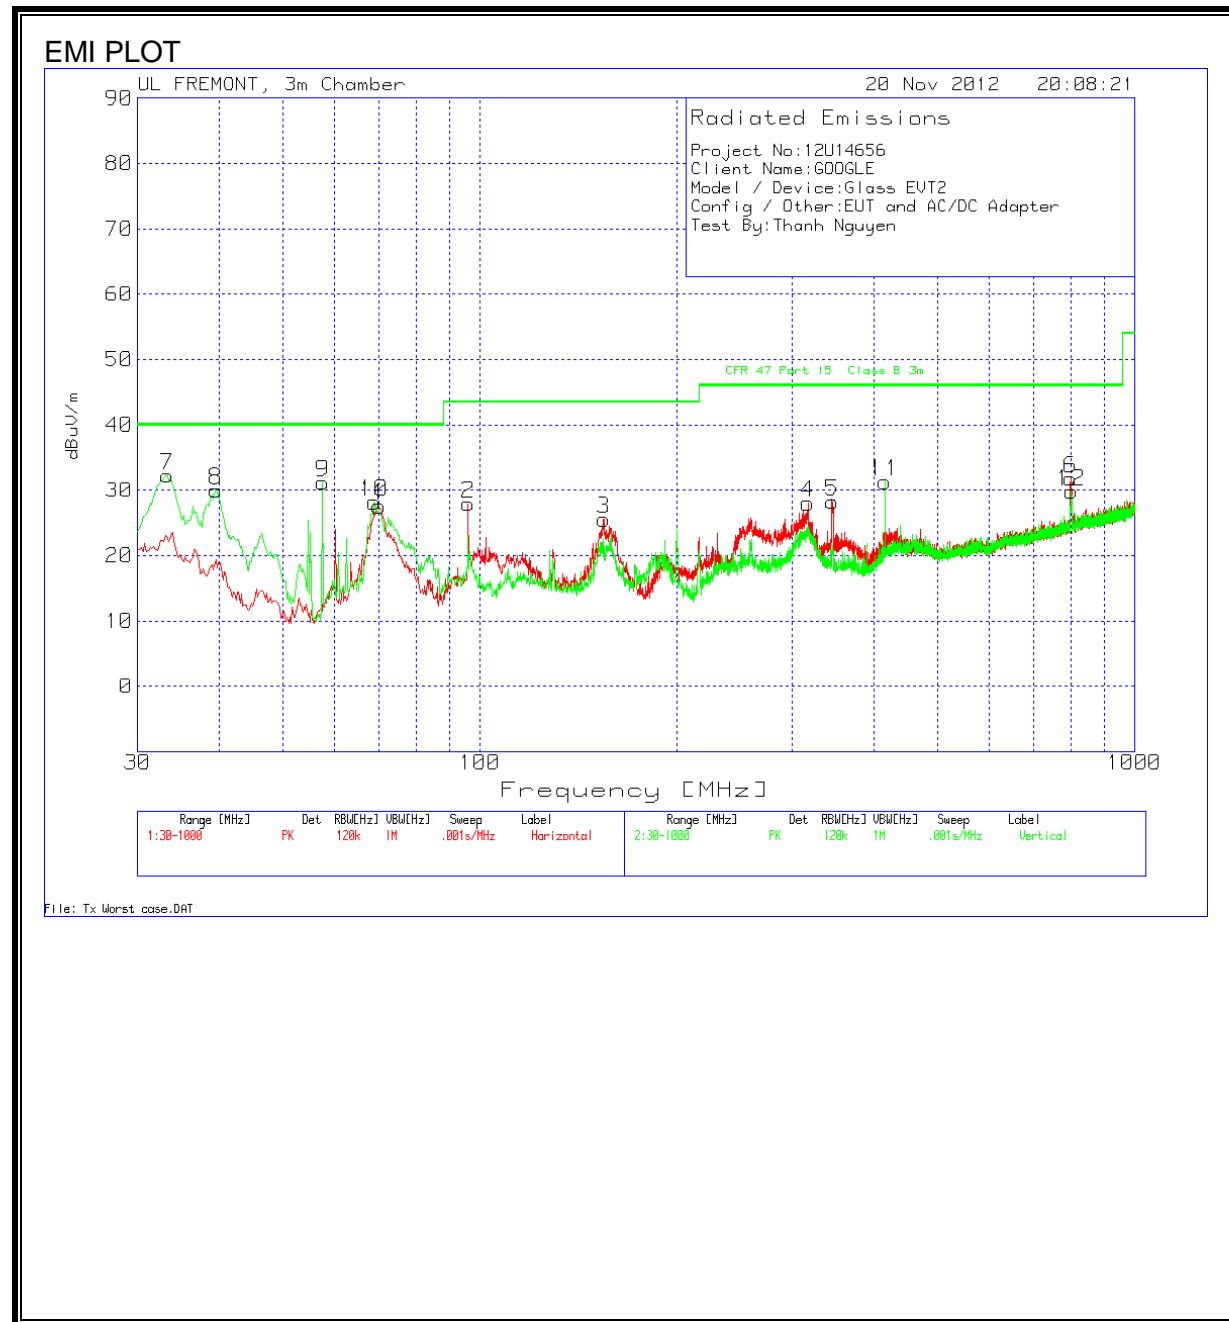

# EMI DATA

Project No:12U14656										
Client Name:GOOGLE										
Model / Device:Glass EVT2										
Config / Other: EUT and AC/DC Adapter, play video and Tx worst case										
Test By:Thanh Nguyen										

Horizontal 30 - 1000MHz										
Marker No.	Test Frequency	Meter Reading	Detector	25MHz-1GHz Chambr 3m Amplified (dB)	Antenna T185 (dB)	dBuV/m	CFR 47 Part 15 Class B 3m	Margin	Height [cm]	Polarity
1	70.1259	46.49	PK	-27.1	8.2	27.59	40	-12.41	301	Horz
2	95.9073	46.05	PK	-26.9	8.8	27.95	43.5	-15.55	400	Horz
3	154.6423	39.64	PK	-26.3	12.2	25.54	43.5	-17.96	201	Horz
4	316.8905	39.51	PK	-25.2	13.7	28.01	46	-17.99	100	Horz
5	345.5795	39.46	PK	-25.3	14.1	28.26	46	-17.74	100	Horz
6	798.4013	35.29	PK	-24.6	21.1	31.79	46	-14.21	100	Horz
Vertical 30 - 1000MHz										
Marker No.	Test Frequency	Meter Reading	Detector	25MHz-1GHz Chambr 3m Amplified (dB)	Antenna T185 (dB)	dBuV/m	CFR 47 Part 15 Class B 3m	Margin	Height [cm]	Polarity
7	33.2954	40.98	PK	-27.5	18.8	32.28	40	-7.72	101	Vert
8	39.4984	43.2	PK	-27.4	14.2	30	40	-10	101	Vert
9	57.526	51.39	PK	-27.2	7	31.19	40	-8.81	101	Vert
10	68.9628	47.18	PK	-27.1	8.1	28.18	40	-11.82	301	Vert
11	415.3637	40.86	PK	-25.7	16.1	31.26	46	-14.74	101	Vert
12	800.7274	33.33	PK	-24.6	21.1	29.83	46	-16.17	101	Vert

## 10. AC MAINS LINE CONDUCTED EMISSIONS

### LIMITS

§15.207 (a)  
IC RSS-GEN, Section 7.2.2

Frequency of emission (MHz)	Conducted Limit (dBµV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50
* Decreases with the logarithm of the frequency.		

### TEST PROCEDURE

ANSI C63.4


### RESULTS

No non-compliance noted:

## 6 WORST EMISSIONS


Project No:12U14656									
Client Name:GOOGLE									
Model/Device:EVT2/ Glass									
Test Volt/Freq:115VAC/ 60Hz									
Test By:Thanh Nguyen									
Line-L1 .15 - 30MHz									
Test Frequency	Meter Reading	Detector	T24 IL L1.TXT (dB)	LC Cables 1&3.TXT (dB)	dB(uVolts)	CFR 47 Part 15 Class B QP	Margin	CFR 47 Part 15 Class B Avg	Margin
0.15	45.72	PK	0.1	0	45.82	66	-20.18	-	-
0.15	29.01	Av	0.1	0	29.11	-	-	56	-26.89
0.4875	47.11	PK	0.1	0	47.21	56.2	-8.99	-	-
0.4875	35.1	Av	0.1	0	35.2	-	-	46.2	-11
2.571	45.25	PK	0.1	0.1	45.45	56	-10.55	-	-
2.571	30.7	Av	0.1	0.1	30.9	-	-	46	-15.1
Line-L2 .15 - 30MHz									
Test Frequency	Meter Reading	Detector	T24 IL L1.TXT (dB)	LC Cables 1&3.TXT (dB)	dB(uVolts)	CFR 47 Part 15 Class B QP	Margin	CFR 47 Part 15 Class B Avg	Margin
0.483	45.52	PK	0.1	0	45.62	56.3	-10.68	-	-
0.483	31.78	Av	0.1	0	31.88	-	-	46.3	-14.42
1.545	42.09	PK	0.1	0.1	42.29	56	-13.71	-	-
1.545	24.64	Av	0.1	0.1	24.84	-	-	46	-21.16
2.589	42.54	PK	0.1	0.1	42.74	56	-13.26	-	-
2.589	27.28	Av	0.1	0.1	27.48	-	-	46	-18.52

**LINE 1 RESULTS**

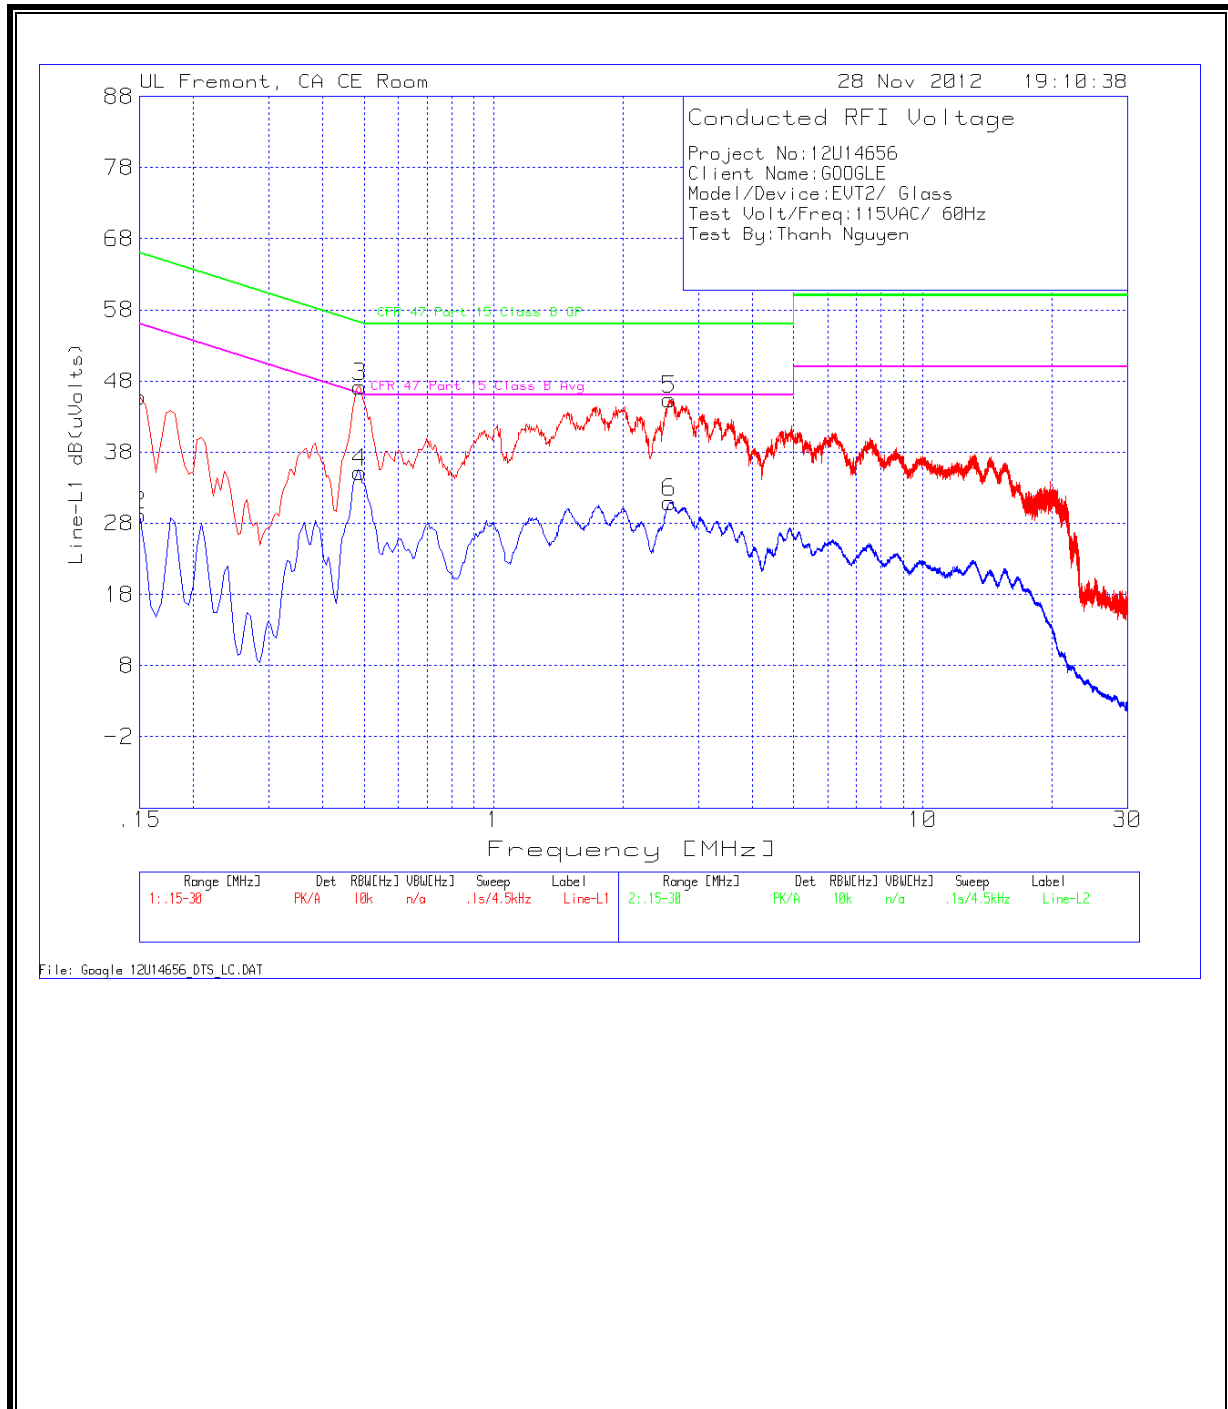



**LINE 2 RESULTS**

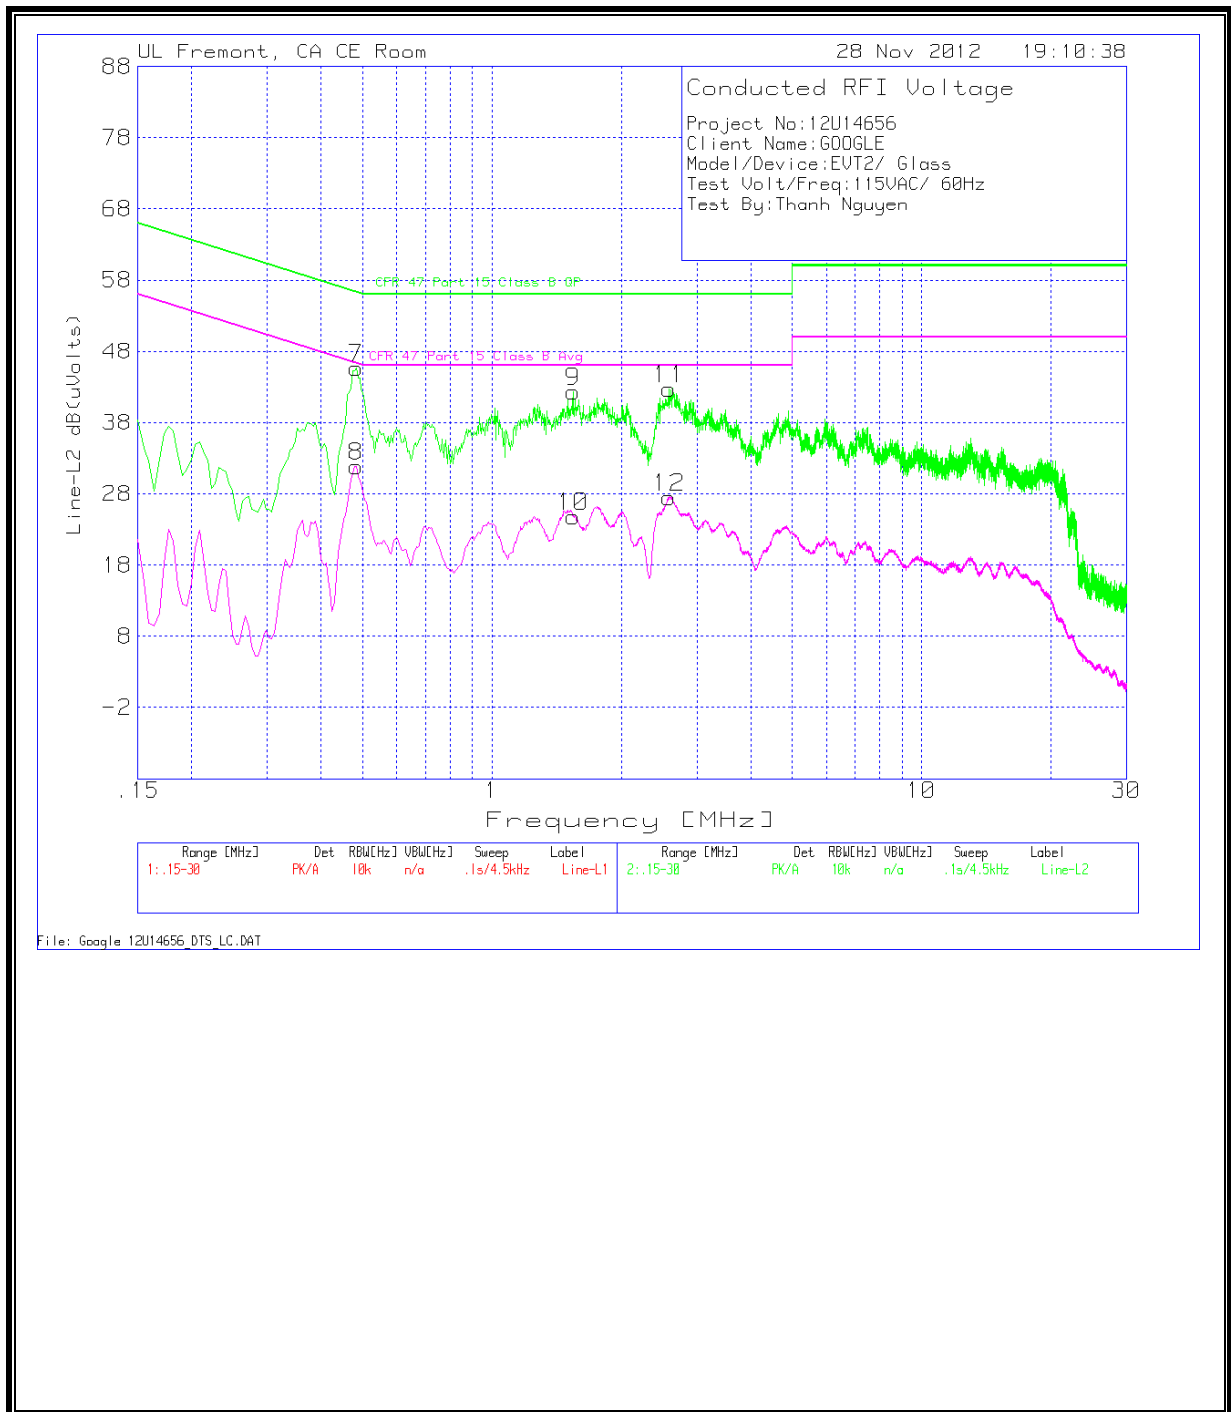

END OF REPORT