



FCC SAR TEST REPORT

FCC ID : A4RG020H
Equipment : Smartphone
Model Name : G020H
Applicant : Google LLC
1600 Amphitheatre Parkway,
Mountain View, CA 94043, USA
Standard : FCC 47 CFR Part 2 (2.1093)
ANSI/IEEE C95.1-1992
IEEE 1528-2013

The product was received on Oct. 22, 2019 and testing was started from Nov. 10, 2019 and completed on Dec. 12, 2019. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this variant report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.



Approved by: Cona Huang / Deputy Manager

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory
No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



Table of Contents

1. Statement of Compliance 4
2. Guidance Applied..... 5
3. Equipment Under Test (EUT) Information 5
3.1 General Information 5
3.2 Maximum Tune-up Limit..... 6
3.3 General LTE SAR Test and Reporting Considerations 11
4. RF Exposure Limits.....13
4.1 Uncontrolled Environment.....13
4.2 Controlled Environment.....13
5. Specific Absorption Rate (SAR).....14
5.1 Introduction14
5.2 SAR Definition.....14
6. System Description and Setup15
6.1 E-Field Probe16
6.2 Data Acquisition Electronics (DAE)16
6.3 Phantom.....17
6.4 Device Holder.....18
7. Measurement Procedures19
7.1 Spatial Peak SAR Evaluation19
7.2 Power Reference Measurement.....20
7.3 Area Scan20
7.4 Zoom Scan.....21
7.5 Volume Scan Procedures.....21
7.6 Power Drift Monitoring.....21
8. Test Equipment List22
9. System Verification23
9.1 Tissue Simulating Liquids.....23
9.2 Tissue Verification24
9.3 System Performance Check Results.....26
10. RF Exposure Positions28
10.1 Ear and handset reference point28
10.2 Definition of the cheek position29
10.3 Definition of the tilt position30
10.4 Body Worn Accessory30
10.5 Wireless Router.....31
10.6 Extremity Exposure31
11. WWAN Conducted RF Output Power (Unit: dBm).....32
12. LTE Carrier Aggregation combinations71
13. WLAN Conducted RF Output Power (Unit: dBm)72
14. Bluetooth Conducted RF Output Power (Unit: dBm)79
15. Exposure Conditions80
16. SAR Test Results81
16.1 Head SAR83
16.2 Hotspot SAR88
16.3 Body Worn Accessory SAR.....98
16.4 Product Specific SAR.....104
16.5 Repeated SAR Measurement104
17. Simultaneous Transmission Analysis.....105
17.1 Head Exposure Conditions106
17.2 Hotspot Exposure Conditions.....109
17.3 Body-Worn Accessory Exposure Conditions113
17.4 Product Specific Exposure Conditions115
18. Uncertainty Assessment116
19. References116
Appendix A. Plots of System Performance Check
Appendix B. Plots of High SAR Measurement
Appendix C. DASy Calibration Certificate
Appendix D. Test Setup Photos



1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for Google LLC, Smartphone, G020H, are as follows.

Equipment Class	Frequency Band	Highest SAR Summary				Highest Simultaneous Transmission 1g SAR (W/kg)
		Head (Separation 0mm)	Body-worn (Separation 10mm)	Hotspot (Separation 10mm)	Product Specific (Separation 0mm)	
		1g SAR (W/kg)			10g SAR (W/kg)	
Licensed	GSM850	0.28	0.34	0.34		1.45
	GSM1900	0.22	0.71	1.19		
	WCDMA II	0.47	0.88	0.98		
	WCDMA IV	0.21	0.57	0.76		
	LTE Band 2	0.44	0.97	1.06		
	LTE Band 4	0.27	0.69	0.93		
	LTE Band 12 / 17	0.25	0.51	0.51		
	LTE Band 13	0.26	0.45	0.46		
	LTE Band 5 / 26	0.29	0.48	0.48		
	LTE Band 38	0.82	0.97	0.97		
	LTE Band 41	0.76	0.97	0.97		
DTS	2.4GHz WLAN	0.61	0.35	0.35		1.39
NII	5GHz WLAN	0.41	0.69	0.67	1.51	1.45
DSS	Bluetooth	0.77	0.17	0.17		1.45
Date of Testing:		2019/11/10 ~ 2019/12/12				

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 1190) and the FCC designation No. TW1190 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC test. This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg for Partial-Body, 4.0 W/kg for Product Specific) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications

Reviewed by: Jason Wang
Report Producer: Wan Liu



2. Guidance Applied

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2013
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 447498 D01 General RF Exposure Guidance v06
- FCC KDB 648474 D04 SAR Evaluation Considerations for Wireless Handsets v01r03
- FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r02
- FCC KDB 941225 D01 3G SAR Procedures v03r01
- FCC KDB 941225 D05 SAR for LTE Devices v02r05
- FCC KDB 941225 D05A Rel.10 LTE SAR Test Guidance v01r02
- FCC KDB 941225 D06 Hotspot Mode SAR v02r01

3. Equipment Under Test (EUT) Information

3.1 General Information

Product Feature & Specification	
Equipment Name	Smartphone
Model Name	G020H
FCC ID	A4RG020H
Wireless Technology and Frequency Range	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8 MHz WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz WCDMA Band IV: 1712.4 MHz ~ 1752.6 MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz LTE Band 2: 1850.7 MHz ~ 1909.3 MHz LTE Band 4: 1710.7 MHz ~ 1754.3 MHz LTE Band 5: 824.7 MHz ~ 848.3 MHz LTE Band 12: 699.7 MHz ~ 715.3 MHz LTE Band 13: 779.5 MHz ~ 784.5 MHz LTE Band 17: 706.5 MHz ~ 713.5 MHz LTE Band 26: 814.7 MHz ~ 848.3 MHz LTE Band 38: 2572.5 MHz ~ 2617.5 MHz LTE Band 41: 2498.5 MHz ~ 2687.5 MHz WLAN 2.4GHz Band: 2412 MHz ~ 2472 MHz WLAN 5.2GHz Band: 5180 MHz ~ 5240 MHz WLAN 5.3GHz Band: 5260 MHz ~ 5320 MHz WLAN 5.5GHz Band: 5500 MHz ~ 5720 MHz WLAN 5.8GHz Band: 5745 MHz ~ 5825 MHz Bluetooth: 2402 MHz ~ 2480 MHz NFC: 13.56 MHz
Mode	GSM/GPRS/EGPRS/DTM RMC/AMR 12.2Kbps HSDPA HSUPA DC-HSDPA LTE: QPSK, 16QAM, 64QAM WLAN 2.4GHz : 802.11b/g/n HT20 WLAN 5GHz : 802.11a/n/ac HT20/HT40/VHT20/VHT40/VHT80 Bluetooth: BR/EDR/LE NFC: ASK
GSM / (E)GPRS Dual Transfer mode	Class A – EUT can support Packet Switched and Circuit Switched Network simultaneously.
Remark:	
1.	This is a Class II permissive change test report and the test plan is included in the operational description.



3.2 Maximum Tune-up Limit

General Note:

1. For each cellular band, the device has 2 antennas (LAT antenna located in the bottom, UAT antenna located in the top edge), the antenna selection is based on the connection quality condition, and only one antenna will transmit at a time.
2. The device has several power modes which are determined by the exposure conditions for head/hotspot/body-worn and also the simultaneous transmission conditions, the detailed implementation of the detection of the use cases and the power table control is illustrated in the operational description exhibit.
3. This device uses different power reduction mechanisms based on a proprietary detection mechanism for next-to-ear operation (head mode). When detected in head mode, WLAN ON or OFF status will activate 2 different power tables. Full details are provided in the operational description exhibit. The power tables below show the maximum powers for the various combinations of antennas when the WLAN is off or on and when a voice call is active (Head Mode) and inactive (Body-Worn / Hotspot Mode).

Maximum WWAN Tune up Power table (WLAN off)

Power Condition		RF Exposure Conditions					
		Maximum Tune Up Power (dBm)	Head Power Level (dBm)		Body Worn / Hotspot Power Level (dBm)		
Antenna			UAT Antenna Power table 4	LAT Antenna Default Power	UAT Antenna Default Power	LAT Antenna Default Power	
GSM8 50	GSM 1 Tx slot		34	N/A	34	34	34
	GPRS 1 Tx slot		34	N/A	34	34	34
	GPRS 2 Tx slots		32	N/A	32	32	32
	GPRS 3 Tx slots		30	N/A	30	30	30
	GPRS 4 Tx slots		29	N/A	29	29	29
	EDGE 1 Tx slot		28	N/A	28	28	28
	EDGE 2 Tx slots		27	N/A	27	27	27
	EDGE 3 Tx slots		25	N/A	25	25	25
	EDGE 4 Tx slots		23	N/A	23	23	23
	DTM 5 (2Tx slots)	GSM 1 Tx slot	32	N/A	32	32	32
		GPRS 1 Tx slot	32	N/A	32	32	32
	DTM 9 (2Tx slots)	GSM 1 Tx slot	32	N/A	32	32	32
		GPRS 1 Tx slot	32	N/A	32	32	32
	DTM 11 (3Tx slots)	GSM 1 Tx slot	30	N/A	30	30	30
		GPRS 2 Tx slot	30	N/A	30	30	30
	DTM 5 (2Tx slots)	GSM 1 Tx slot	32	N/A	32	32	32
		EDGE 1 Tx slot	27	N/A	27	27	27
	DTM 9 (2Tx slots)	GSM 1 Tx slot	32	N/A	32	32	32
EDGE 1 Tx slot		27	N/A	27	27	27	
DTM 11 (3Tx slots)	GSM 1 Tx slot	30	N/A	30	30	30	
	EDGE 2 Tx slot	25	N/A	25	25	25	
GSM1 900	GSM 1 Tx slot		31	N/A	31	N/A	31
	GPRS 1 Tx slot		31	N/A	31	N/A	31
	GPRS 2 Tx slots		29.5	N/A	29.5	N/A	29.5
	GPRS 3 Tx slots		27.5	N/A	27.5	N/A	27.5
	GPRS 4 Tx slots		26.5	N/A	26.5	N/A	26.5
	EDGE 1 Tx slot		27	N/A	27	N/A	27
	EDGE 2 Tx slots		26	N/A	26	N/A	26
	EDGE 3 Tx slots		25	N/A	25	N/A	25
	EDGE 4 Tx slots		24	N/A	24	N/A	24
	DTM 5 (2Tx slots)	GSM 1 Tx slot	29.5	N/A	29.5	N/A	29.5
		GPRS 1 Tx slot	29.5	N/A	29.5	N/A	29.5
	DTM 9 (2Tx slots)	GSM 1 Tx slot	29.5	N/A	29.5	N/A	29.5
		GPRS 1 Tx slot	29.5	N/A	29.5	N/A	29.5
	DTM 11 (3Tx slots)	GSM 1 Tx slot	27.5	N/A	27.5	N/A	27.5
		GPRS 2 Tx slot	27.5	N/A	27.5	N/A	27.5
	DTM 5 (2Tx slots)	GSM 1 Tx slot	29.5	N/A	29.5	N/A	29.5
		EDGE 1 Tx slot	26	N/A	26	N/A	26
	DTM 9 (2Tx slots)	GSM 1 Tx slot	29.5	N/A	29.5	N/A	29.5
EDGE 1 Tx slot		26	N/A	26	N/A	26	
DTM 11 (3Tx slots)	GSM 1 Tx slot	27.5	N/A	27.5	N/A	27.5	
	EDGE 2 Tx slot	25	N/A	25	N/A	25	



Power Condition	RF Exposure Conditions				
	Maximum Tune Up Power (dBm)	Head Power Level (dBm)		Body Worn / Hotspot Power Level (dBm)	
		UAT Antenna Power table 4	LAT Antenna Default Power	UAT Antenna Default Power	LAT Antenna Default Power
WCDMA II	25.7	N/A	25.7	N/A	25.7
WCDMA IV	24	N/A	24	24	24
WCDMA V	24.5	N/A	24.5	24.5	24.5
LTE 2	25.7	N/A	25.7	N/A	25.7
LTE 4	24.5	N/A	24.5	24.5	24.5
LTE 5	25.7	N/A	25.7	25.7	25.7
LTE 12	25.7	N/A	25.7	25.7	25.7
LTE 13	25.3	N/A	25.3	25.3	25.3
LTE 17	25.7	N/A	25.7	25.7	25.7
LTE 26	25.7	N/A	25.7	25.7	25.7
LTE 38	25.7	N/A	25.7	N/A	25.7
LTE 41	25	N/A	25	N/A	25



Maximum WWAN Tune up Power table (WLAN on)

Power Condition		RF Exposure Conditions					
		Maximum Tune Up Power (dBm)	Head Power Level (dBm)		Body Worn / Hotspot Power Level (dBm)		
Antenna			UAT Antenna Power table 3	LAT Antenna Power table 1	UAT Antenna Power table 5	LAT Antenna Power table 2	
GSM850	GSM 1 Tx slot	34	N/A	34	N/A	31.7	
	GPRS 1 Tx slot	34	N/A	34	N/A	31.7	
	GPRS 2 Tx slots	32	N/A	32	N/A	30	
	GPRS 3 Tx slots	30	N/A	30	N/A	28	
	GPRS 4 Tx slots	29	N/A	29	N/A	27	
	EDGE 1 Tx slot	28	N/A	28	N/A	26	
	EDGE 2 Tx slots	27	N/A	27	N/A	25	
	EDGE 3 Tx slots	25	N/A	25	N/A	23	
	EDGE 4 Tx slots	23	N/A	23	N/A	21	
	DTM 5 (2Tx slots)	GSM 1 Tx slot	32	N/A	32	N/A	30
		GPRS 1 Tx slot	32	N/A	32	N/A	30
	DTM 9 (2Tx slots)	GSM 1 Tx slot	32	N/A	32	N/A	30
		GPRS 1 Tx slot	32	N/A	32	N/A	30
	DTM 11 (3Tx slots)	GSM 1 Tx slot	30	N/A	30	N/A	28
		GPRS 2 Tx slot	30	N/A	30	N/A	28
	DTM 5 (2Tx slots)	GSM 1 Tx slot	32	N/A	32	N/A	30
		EDGE 1 Tx slot	27	N/A	27	N/A	25
	DTM 9 (2Tx slots)	GSM 1 Tx slot	32	N/A	32	N/A	30
EDGE 1 Tx slot		27	N/A	27	N/A	25	
DTM 11 (3Tx slots)	GSM 1 Tx slot	30	N/A	30	N/A	28	
	EDGE 2 Tx slot	25	N/A	25	N/A	23	
GSM1900	GSM 1 Tx slot	31	N/A	31	N/A	25	
	GPRS 1 Tx slot	31	N/A	31	N/A	25	
	GPRS 2 Tx slots	29.5	N/A	29.5	N/A	23.5	
	GPRS 3 Tx slots	27.5	N/A	27.5	N/A	21.5	
	GPRS 4 Tx slots	26.5	N/A	26.5	N/A	20.5	
	EDGE 1 Tx slot	27	N/A	27	N/A	21	
	EDGE 2 Tx slots	26	N/A	26	N/A	20	
	EDGE 3 Tx slots	25	N/A	25	N/A	19	
	EDGE 4 Tx slots	24	N/A	24	N/A	18	
	DTM 5 (2Tx slots)	GSM 1 Tx slot	29.5	N/A	29.5	N/A	23.5
		GPRS 1 Tx slot	29.5	N/A	29.5	N/A	23.5
	DTM 9 (2Tx slots)	GSM 1 Tx slot	29.5	N/A	29.5	N/A	23.5
		GPRS 1 Tx slot	29.5	N/A	29.5	N/A	23.5
	DTM 11 (3Tx slots)	GSM 1 Tx slot	27.5	N/A	27.5	N/A	21.5
		GPRS 2 Tx slot	27.5	N/A	27.5	N/A	21.5
	DTM 5 (2Tx slots)	GSM 1 Tx slot	29.5	N/A	29.5	N/A	23.5
		EDGE 1 Tx slot	26	N/A	26	N/A	20
	DTM 9 (2Tx slots)	GSM 1 Tx slot	29.5	N/A	29.5	N/A	23.5
EDGE 1 Tx slot		26	N/A	26	N/A	20	
DTM 11 (3Tx slots)	GSM 1 Tx slot	27.5	N/A	27.5	N/A	21.5	
	EDGE 2 Tx slot	25	N/A	25	N/A	19	



Power Condition	RF Exposure Conditions				
	Maximum Tune Up Power (dBm)	Head Power Level (dBm)		Body Worn / Hotspot Power Level (dBm)	
		Antenna	UAT Antenna Power table 3	LAT Antenna Power table 1	UAT Antenna Power table 5
WCDMA II	25.7	N/A	22.6	N/A	19.6
WCDMA IV	24	N/A	24	N/A	20
WCDMA V	24.5	N/A	24.5	N/A	24.5
LTE 2	25.7	N/A	22.7	N/A	19.7
LTE 4	24.5	N/A	24.5	N/A	19.2
LTE 5	25.7	N/A	25.7	N/A	23.7
LTE 12	25.7	N/A	25.7	N/A	22.7
LTE 13	25.3	N/A	25.3	N/A	22.3
LTE 17	25.7	N/A	25.7	N/A	22.7
LTE 26	25.7	N/A	25.7	N/A	23.7
LTE 38	25.7	N/A	23.2	N/A	21.2
LTE 41	25	N/A	23	N/A	20.5

WLAN SISO Power table

Frequency Band	Modulation	WWAN On/Off			
		Head Power table 1		Body Worn/Hotspot Power table 2	
		Ant 4	Ant 5	Ant 4	Ant 5
WLAN 2.4GHz	802.11b	14.5	14.5	18	18
	802.11g	14.5	14.5	18	18
	802.11n HT20	14.5	14.5	18	18
WLAN5GHz UNII 1	802.11a	12.5	12.5	17.5	17.5
	802.11n HT20	12.5	12.5	17.5	17.5
	802.11n HT40	12.5	12.5	17.5	17.5
	802.11ac VHT20	12.5	12.5	17.5	17.5
	802.11ac VHT40	12.5	12.5	17.5	17.5
	802.11ac VHT80	12.5	12.5	12.5	12.5
WLAN5GHz UNII 2A	802.11a	12.5	12.5	17.5	17.5
	802.11n HT20	12.5	12.5	17.5	17.5
	802.11n HT40	12.5	12.5	17.5	17.5
	802.11ac VHT20	12.5	12.5	17.5	17.5
	802.11ac VHT40	12.5	12.5	17.5	17.5
	802.11ac VHT80	12.5	12.5	12.5	12.5
WLAN5GHz UNII 2C	802.11a	10.5	10.5	17.5	17.5
	802.11n HT20	10.5	10.5	17.5	17.5
	802.11n HT40	10.5	10.5	17.5	17.5
	802.11ac VHT20	10.5	10.5	17.5	17.5
	802.11ac VHT40	10.5	10.5	17.5	17.5
	802.11ac VHT80	10.5	10.5	17.5	17.5
WLAN5GHz UNII 3	802.11a	10	10	17.5	17.5
	802.11n HT20	10	10	17.5	17.5
	802.11n HT40	10	10	17.5	17.5
	802.11ac VHT20	10	10	17.5	17.5
	802.11ac VHT40	10	10	17.5	17.5
	802.11ac VHT80	10	10	17.5	17.5

WLAN MIMO Power table

Frequency Band	Modulation	WWAN On/Off					
		Head Power table 1			Body Worn/Hotspot Power table 2		
		Ant4	Ant5	Ant 4+5	Ant4	Ant5	Ant 4+5
WLAN 2.4GHz	802.11b	14.5	14.5	17.5	18	18	21
	802.11g	14.5	14.5	17.5	18	18	21
	802.11n HT20	14.5	14.5	17.5	18	18	21
WLAN5GHz UNII 1	802.11a	12.5	12.5	15.5	17.5	17.5	20.5
	802.11n HT20	12.5	12.5	15.5	17.5	17.5	20.5
	802.11n HT40	12.5	12.5	15.5	17.5	17.5	20.5
	802.11ac VHT20	12.5	12.5	15.5	17.5	17.5	20.5
	802.11ac VHT40	12.5	12.5	15.5	17.5	17.5	20.5
	802.11ac VHT80	12.5	12.5	15.5	12.5	12.5	15.5
WLAN5GHz UNII 2A	802.11a	12.5	12.5	15.5	17.5	17.5	20.5
	802.11n HT20	12.5	12.5	15.5	17.5	17.5	20.5
	802.11n HT40	12.5	12.5	15.5	17.5	17.5	20.5
	802.11ac VHT20	12.5	12.5	15.5	17.5	17.5	20.5
	802.11ac VHT40	12.5	12.5	15.5	17.5	17.5	20.5
	802.11ac VHT80	12.5	12.5	15.5	12.5	12.5	15.5
WLAN5GHz UNII 2C	802.11a	10.5	10.5	13.5	17.5	17.5	20.5
	802.11n HT20	10.5	10.5	13.5	17.5	17.5	20.5
	802.11n HT40	10.5	10.5	13.5	17.5	17.5	20.5
	802.11ac VHT20	10.5	10.5	13.5	17.5	17.5	20.5
	802.11ac VHT40	10.5	10.5	13.5	17.5	17.5	20.5
	802.11ac VHT80	10.5	10.5	13.5	17.5	17.5	20.5
WLAN5GHz UNII 3	802.11a	10	10	13	17.5	17.5	20.5
	802.11n HT20	10	10	13	17.5	17.5	20.5
	802.11n HT40	10	10	13	17.5	17.5	20.5
	802.11ac VHT20	10	10	13	17.5	17.5	20.5
	802.11ac VHT40	10	10	13	17.5	17.5	20.5
	802.11ac VHT80	10	10	13	17.5	17.5	20.5

Bluetooth Power table

Frequency Band	Mode	Tune up Power (dBm)	
		Ant 4	
Bluetooth	BR/EDR	1Mbps	18
		2Mbps	13
		3Mbps	13
	LE	1Mbps	10
		2Mbps	10



3.3 General LTE SAR Test and Reporting Considerations

Summarized necessary items addressed in KDB 941225 D05 v02r05																																																																										
FCC ID	A4RG020H																																																																									
Equipment Name	Smartphone																																																																									
Operating Frequency Range of each LTE transmission band	LTE Band 2: 1850.7 MHz ~ 1909.3 MHz LTE Band 4: 1710.7 MHz ~ 1754.3 MHz LTE Band 5: 824.7 MHz ~ 848.3 MHz LTE Band 12: 699.7 MHz ~ 715.3 MHz LTE Band 13: 779.5 MHz ~ 784.5 MHz LTE Band 17: 706.5 MHz ~ 713.5 MHz LTE Band 26: 814.7 MHz ~ 848.3 MHz LTE Band 38: 2572.5 MHz ~ 2617.5 MHz LTE Band 41: 2498.5 MHz ~ 2687.5 MHz																																																																									
Channel Bandwidth	LTE Band 02: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 04: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 05: 1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 12: 1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 13: 5MHz, 10MHz LTE Band 17: 5MHz, 10MHz LTE Band 26: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz LTE Band 38: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 41: 5MHz, 10MHz, 15MHz, 20MHz																																																																									
uplink modulations used	QPSK / 16QAM / 64QAM																																																																									
LTE Voice / Data requirements	Voice and Data																																																																									
LTE MPR permanently built-in by design	<p align="center">Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3</p> <table border="1"> <thead> <tr> <th rowspan="2">Modulation</th> <th colspan="6">Channel bandwidth / Transmission bandwidth (N_{RB})</th> <th rowspan="2">MPR (dB)</th> </tr> <tr> <th>1.4 MHz</th> <th>3.0 MHz</th> <th>5 MHz</th> <th>10 MHz</th> <th>15 MHz</th> <th>20 MHz</th> </tr> </thead> <tbody> <tr> <td>QPSK</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 2</td> </tr> <tr> <td>64 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 2</td> </tr> <tr> <td>64 QAM</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 3</td> </tr> <tr> <td>256 QAM</td> <td colspan="6">≥ 1</td> <td>≤ 5</td> </tr> </tbody> </table>												Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2	64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2	64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3	256 QAM	≥ 1						≤ 5
Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)																																																																			
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																																																				
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1																																																																			
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																																																			
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																																																			
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2																																																																			
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3																																																																			
256 QAM	≥ 1						≤ 5																																																																			
LTE A-MPR	In the base station simulator configuration, Network Setting value is set to NS_01 to disable A-MPR during SAR testing and the LTE SAR tests was transmitting on all TTI frames (Maximum TTI)																																																																									
Spectrum plots for RB configuration	A properly configured base station simulator was used for the SAR and power measurement; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.																																																																									
Power reduction applied to satisfy SAR compliance	The device has several different power modes for head / hotspot / body-worn conditions SAR compliance; power selection is determined by the device's positioning and usage scenarios, the power selection is defined in the section 3.2.																																																																									
LTE Carrier Aggregation Combinations	Inter-Band and Intra-Band possible combinations and the detail power measurement please referred to original report section 12																																																																									
LTE Carrier Aggregation Additional Information	This device supports maximum of 3 carriers in the downlink. Additional following LTE Release features are not supported: Relay, HetNet, Enhanced MIMO, eICI, WiFi Offloading, MDH, eMBMA, Cross-Carrier Scheduling, Enhanced SC-FDMA.																																																																									
Transmission (H, M, L) channel numbers and frequencies in each LTE band																																																																										
LTE Band 2																																																																										
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz																																																															
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)																																																														
L	18607	1850.7	18615	1851.5	18625	1852.5	18650	1855	18675	1857.5	18700	1860																																																														
M	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880																																																														
H	19193	1909.3	19185	1908.5	19175	1907.5	19150	1905	19125	1902.5	19100	1900																																																														



Transmission (H, M, L) channel numbers and frequencies in each LTE band													
LTE Band 4													
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz		
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	
L	19957	1710.7	19965	1711.5	19975	1712.5	20000	1715	20025	1717.5	20050	1720	
M	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	
H	20393	1754.3	20385	1753.5	20375	1752.5	20350	1750	20325	1747.5	20300	1745	
LTE Band 5													
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz		
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	
L	20407	824.7	20415	825.5	20425	826.5	20450	829	20450	829	20450	829	
M	20525	836.5	20525	836.5	20525	836.5	20525	836.5	20525	836.5	20525	836.5	
H	20643	848.3	20635	847.5	20625	846.5	20600	844	20600	844	20600	844	
LTE Band 12													
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz		
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	
L	23017	699.7	23025	700.5	23035	701.5	23060	704	23060	704	23060	704	
M	23095	707.5	23095	707.5	23095	707.5	23095	707.5	23095	707.5	23095	707.5	
H	23173	715.3	23165	714.5	23155	713.5	23130	711	23130	711	23130	711	
LTE Band 13													
	Bandwidth 5 MHz				Bandwidth 10 MHz				Bandwidth 15 MHz				Bandwidth 20 MHz
	Channel #	Freq.(MHz)			Channel #	Freq.(MHz)			Channel #	Freq.(MHz)			Channel #
L	23205	779.5			23230	782			23230	782			782
M	23230	782											
H	23255	784.5											
LTE Band 17													
	Bandwidth 5 MHz				Bandwidth 10 MHz				Bandwidth 15 MHz				Bandwidth 20 MHz
	Channel #	Freq.(MHz)			Channel #	Freq.(MHz)			Channel #	Freq.(MHz)			Channel #
L	23755	706.5			23780	709			23780	709			709
M	23790	710											
H	23825	713.5											
LTE Band 26													
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz		
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	
L	26697	814.7	26705	815.5	26715	816.5	26740	819	26765	821.5	26765	821.5	
M	26865	831.5	26865	831.5	26865	831.5	26865	831.5	26865	831.5	26865	831.5	
H	27033	848.3	27025	847.5	27015	846.5	26990	844	26965	841.5	26965	841.5	
LTE Band 38													
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz		Bandwidth 25 MHz		Bandwidth 30 MHz		
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	
L	37775	2572.5	37800	2575	37825	2577.5	37850	2580	37850	2580	37850	2580	
M	38000	2595	38000	2595	38000	2595	38000	2595	38000	2595	38000	2595	
H	38225	2617.5	38200	2615	38175	2612.5	38150	2610	38150	2610	38150	2610	
LTE Band 41													
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz		Bandwidth 25 MHz		Bandwidth 30 MHz		
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	
L	39675	2498.5	39700	2501	39725	2503.5	39750	2506	39750	2506	39750	2506	
L	40148	2545.8	40160	2547	40173	2548.3	40185	2549.5	40185	2549.5	40185	2549.5	
M	40620	2593	40620	2593	40620	2593	40620	2593	40620	2593	40620	2593	
H	41093	2640.3	41080	2639	41068	2637.8	41055	2636.5	41055	2636.5	41055	2636.5	
H	41565	2687.5	41540	2685	41515	2682.5	41490	2680	41490	2680	41490	2680	



4. RF Exposure Limits

4.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

4.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

1. Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

5. Specific Absorption Rate (SAR)

5.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

5.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

6. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:

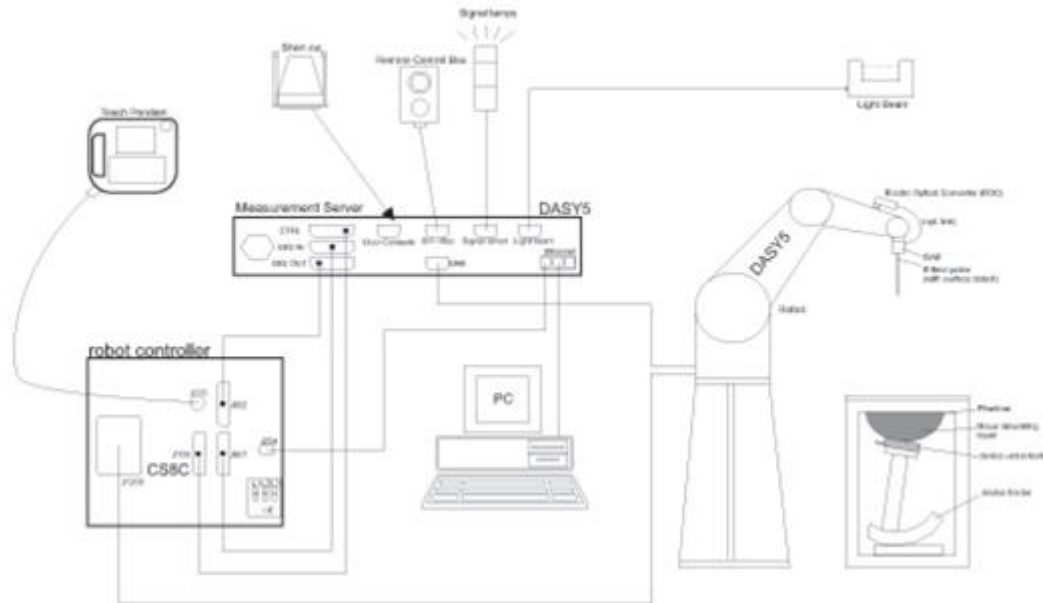


- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.


6.1 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

<ES3DV3 Probe>

Construction	Symmetric design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz – 4 GHz; Linearity: ± 0.2 dB (30 MHz – 4 GHz)	
Directivity	± 0.2 dB in TSL (rotation around probe axis) ± 0.3 dB in TSL (rotation normal to probe axis)	
Dynamic Range	5 μ W/g – >100 mW/g; Linearity: ± 0.2 dB	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 3.9 mm (body: 12 mm) Distance from probe tip to dipole centers: 3.0 mm	

<EX3DV4 Probe>

Construction	Symmetric design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz – >6 GHz Linearity: ± 0.2 dB (30 MHz – 6 GHz)	
Directivity	± 0.3 dB in TSL (rotation around probe axis) ± 0.5 dB in TSL (rotation normal to probe axis)	
Dynamic Range	10 μ W/g – >100 mW/g Linearity: ± 0.2 dB (noise: typically <1 μ W/g)	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 2.5 mm (body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

6.2 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.


The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



Fig 5.1 Photo of DAE


6.3 Phantom

<SAM Twin Phantom>

Shell Thickness	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm	
Filling Volume	Approx. 25 liters	
Dimensions	Length: 1000 mm; Width: 500 mm; Height: adjustable feet	
Measurement Areas	Left Hand, Right Hand, Flat Phantom	

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

<ELI Phantom>

Shell Thickness	2 ± 0.2 mm (sagging: <1%)	
Filling Volume	Approx. 30 liters	
Dimensions	Major ellipse axis: 600 mm Minor axis: 400 mm	

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

6.4 Device Holder

<Mounting Device for Hand-Held Transmitter>

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.



Mounting Device for Hand-Held Transmitters



Mounting Device Adaptor for Wide-Phones

<Mounting Device for Laptops and other Body-Worn Transmitters>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Mounting Device for Laptops

7. Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

7.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g



7.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

7.3 Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB0 is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

Table with 3 columns: Parameter, ≤ 3 GHz, > 3 GHz. Rows include: Maximum distance from closest measurement point, Maximum probe angle, and Maximum area scan spatial resolution.

7.4 Zoom Scan

Zoom scans are used assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube shoes base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

		≤ 3 GHz	> 3 GHz	
Maximum zoom scan spatial resolution: $\Delta x_{Zoom}, \Delta y_{Zoom}$		≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*	
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$	≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm	
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z	≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm	
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details. * When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

7.5 Volume Scan Procedures

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

7.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASY measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.



8. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	750MHz System Validation Kit	D750V3	1107	Mar. 08, 2019	Mar. 07, 2020
SPEAG	835MHz System Validation Kit	D835V2	4d167	Mar. 08, 2019	Mar. 07, 2020
SPEAG	1750MHz System Validation Kit	D1750V2	1112	Mar. 07, 2019	Mar. 06, 2020
SPEAG	1900MHz System Validation Kit	D1900V2	5d041	Sep. 11, 2018	Sep. 10, 2020
SPEAG	2450MHz System Validation Kit	D2450V2	736	Aug. 31, 2018	Aug. 30, 2020
SPEAG	2600MHz System Validation Kit	D2600V2	1078	Mar. 06, 2019	Mar. 05, 2020
SPEAG	5GHz System Validation Kit	D5GHzV2	1006	Sep. 27, 2018	Sep. 26, 2020
SPEAG	Data Acquisition Electronics	DAE3	495	May. 21, 2019	May. 20, 2020
SPEAG	Data Acquisition Electronics	DAE4	316	Jan. 03, 2019	Jan. 02, 2020
SPEAG	Data Acquisition Electronics	DAE4	905	Jun. 13, 2019	Jun. 12, 2020
SPEAG	Data Acquisition Electronics	DAE4	778	May. 21, 2019	May. 20, 2020
SPEAG	Data Acquisition Electronics	DAE4	853	Jul. 18, 2019	Jul. 17, 2020
SPEAG	Data Acquisition Electronics	DAE4	1399	Nov. 16, 2018	Nov. 15, 2019
SPEAG	Data Acquisition Electronics	DAE4	854	May. 21, 2019	May. 20, 2020
SPEAG	Data Acquisition Electronics	DAE3	577	Sep. 17, 2019	Sep. 16, 2020
SPEAG	Data Acquisition Electronics	DAE4	1311	Aug. 27, 2019	Aug. 26, 2020
SPEAG	Dosimetric E-Field Probe	ES3DV3	3270	Sep. 25, 2019	Sep. 24, 2020
SPEAG	Dosimetric E-Field Probe	EX3DV4	3925	Sep. 20, 2019	Sep. 19, 2020
SPEAG	Dosimetric E-Field Probe	ES3DV3	3124	Jan. 15, 2019	Jan. 14, 2020
SPEAG	Dosimetric E-Field Probe	EX3DV4	3642	Apr. 29, 2019	Apr. 28, 2020
SPEAG	Dosimetric E-Field Probe	EX3DV4	3728	Jan. 15, 2019	Jan. 14, 2020
SPEAG	Dosimetric E-Field Probe	EX3DV4	7346	Apr. 25, 2019	Apr. 24, 2020
SPEAG	Dosimetric E-Field Probe	EX3DV4	3931	Sep. 26, 2019	Sep. 25, 2020
SPEAG	Dosimetric E-Field Probe	EX3DV4	7306	Jul. 22, 2019	Jul. 21, 2020
Testo	Hygro meter	608-H1	34893240	Nov. 07, 2019	Nov. 06, 2020
Testo	Hygro meter	608-H1	34913912	Nov. 07, 2019	Nov. 06, 2020
Anritsu	Radio Communication Analyzer	MT8821C	6201341950	Apr. 21, 2019	Apr. 20, 2020
Agilent	Wireless Communication Test Set	E5515C	MY50266977	May. 27, 2019	May. 26, 2020
SPEAG	Device Holder	N/A	N/A	N/A	N/A
R&S	Signal Generator	SMA100A	101091	Jul. 03, 2019	Jul. 02, 2020
Agilent	ENA Network Analyzer	E5071C	MY46104758	Sep. 06, 2019	Sep. 05, 2020
SPEAG	Dielectric Probe Kit	DAK-3.5	1126	Sep. 18, 2019	Sep. 17, 2020
LINE SEIKI	Digital Thermometer	DTM3000-spezial	3169	Sep. 10, 2019	Sep. 09, 2020
Anritsu	Power Meter	ML2495A	1036004	Aug. 08, 2019	Aug. 07, 2020
Anritsu	Power Sensor	MA2411B	1027253	Aug. 08, 2019	Aug. 07, 2020
Anritsu	Power Meter	ML2495A	1419002	May. 29, 2019	May. 28, 2020
Anritsu	Power Sensor	MA2411B	1339124	May. 29, 2019	May. 28, 2020
Agilent	Spectrum Analyzer	E4408B	MY44211028	Aug. 27, 2019	Aug. 26, 2020
Anritsu	Spectrum Analyzer	MS2830A	6201396378	Jun. 27, 2019	Jun. 26, 2020
Mini-Circuits	Power Amplifier	ZHL-42W+	321501827	Aug. 12, 2019	Aug. 11, 2020
Mini-Circuits	Power Amplifier	ZHL-42W+	715701915	May. 10, 2019	May. 09, 2020
ATM	Dual Directional Coupler	C122H-10	P610410z-02	Note 1	
Woken	Attenuator 1	WK0602-XX	N/A	Note 1	
PE	Attenuator 2	PE7005-10	N/A	Note 1	
PE	Attenuator 3	PE7005-3	N/A	Note 1	

General Note:

1. Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check source.
2. Referring to KDB 865664 D01v01r04, the dipole calibration interval can be extended to 3 years with justification. The dipoles are also not physically damaged, or repaired during the interval.
3. The justification data of dipole D1900V2, SN: 5d041, D2450V2, SN: 736, D5GHzV2, SN: 1006 can be found in appendix C. The return loss is < -20dB, within 20% of prior calibration, the impedance is within 5 ohm of prior calibration.

9. System Verification

9.1 Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 10.1. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 10.2.

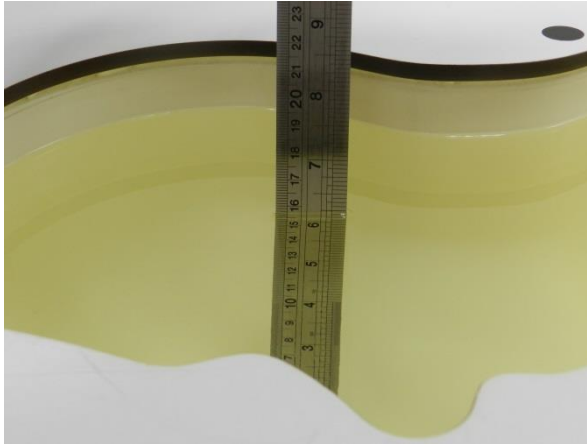


Fig 10.1 Photo of Liquid Height for Head SAR

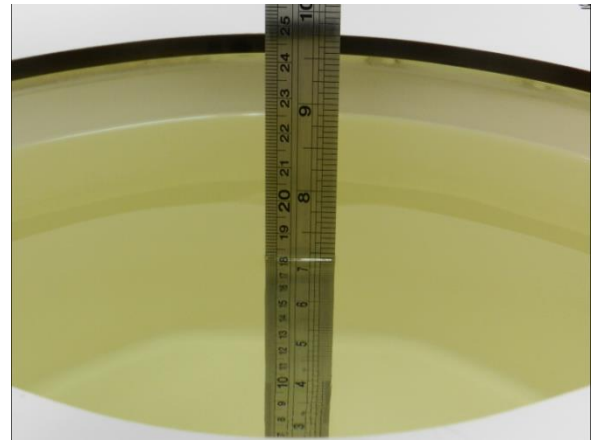


Fig 10.2 Photo of Liquid Height for Body SAR



9.2 Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity (σ)	Permittivity (ϵ_r)
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
900	40.3	57.9	0.2	1.4	0.2	0	0.97	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
2600	54.8	0	0	0.1	0	45.1	1.96	39.0

Simulating Liquid for 5GHz, Manufactured by SPEAG

Ingredients	(% by weight)
Water	64~78%
Mineral oil	11~18%
Emulsifiers	9~15%
Additives and Salt	2~3%



<Tissue Dielectric Parameter Check Results>

Frequency (MHz)	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ε _r)	Conductivity Target (σ)	Permittivity Target (ε _r)	Delta (σ) (%)	Delta (ε _r) (%)	Limit (%)	Date
750	22.5	0.893	43.189	0.89	41.90	0.34	3.08	±5	2019/11/10
750	22.5	0.894	42.549	0.89	41.90	0.45	1.55	±5	2019/11/17
750	22.6	0.890	42.349	0.89	41.90	0.00	1.07	±5	2019/12/12
750	22.6	0.890	42.180	0.89	41.90	0.00	0.67	±5	2019/12/12
835	22.6	0.872	41.770	0.90	41.50	-3.11	0.65	±5	2019/11/10
835	22.8	0.882	42.069	0.90	41.50	-2.00	1.37	±5	2019/11/16
835	22.6	0.878	41.869	0.90	41.50	-2.44	0.89	±5	2019/12/12
835	22.6	0.873	42.963	0.90	41.50	-3.00	3.53	±5	2019/12/12
1750	22.4	1.338	39.730	1.37	40.10	-2.34	-0.92	±5	2019/11/11
1750	22.6	1.368	39.610	1.37	40.10	-0.15	-1.22	±5	2019/11/12
1750	22.2	1.361	40.492	1.37	40.10	-0.66	0.98	±5	2019/11/15
1750	22.6	1.338	40.240	1.37	40.10	-2.34	0.35	±5	2019/12/12
1900	22.4	1.438	39.180	1.40	40.00	2.71	-2.05	±5	2019/11/11
1900	22.6	1.430	39.330	1.40	40.00	2.14	-1.68	±5	2019/11/12
1900	22.2	1.417	38.529	1.40	40.00	1.21	-3.68	±5	2019/11/15
2450	22.6	1.821	38.459	1.80	39.20	1.17	-1.89	±5	2019/11/20
2450	22.4	1.806	40.010	1.80	39.20	0.33	2.07	±5	2019/12/11
2600	22.6	1.971	38.120	1.96	39.00	0.56	-2.26	±5	2019/11/10
2600	22.2	1.978	39.248	1.96	39.00	0.92	0.64	±5	2019/11/19
2600	22.7	1.923	38.377	1.96	39.00	-1.89	-1.60	±5	2019/11/20
2600	22.4	1.967	38.677	1.96	39.00	0.36	-0.83	±5	2019/11/21
5250	22.2	4.621	37.603	4.71	35.95	-1.89	4.60	±5	2019/11/20
5250	22.2	4.620	37.595	4.71	35.95	-1.91	4.58	±5	2019/11/21
5250	22.5	4.619	37.585	4.71	35.95	-1.93	4.55	±5	2019/11/22
5600	22.2	4.978	37.091	5.07	35.50	-1.81	4.48	±5	2019/11/20
5600	22.5	4.975	37.072	5.07	35.50	-1.87	4.43	±5	2019/11/22
5750	22.2	5.130	36.949	5.22	35.35	-1.72	4.52	±5	2019/11/21



9.3 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Table with 10 columns: Date, Frequency (MHz), Input Power (mW), Dipole S/N, Probe S/N, DAE S/N, Measured 1g SAR (W/kg), Targeted 1g SAR (W/kg), Normalized 1g SAR (W/kg), Deviation (%). It contains 30 rows of test data.

Date	Frequency (MHz)	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 10g SAR (W/kg)	Targeted 10g SAR (W/kg)	Normalized 10g SAR (W/kg)	Deviation (%)
2019/11/22	5250	100	D5GHzV2-1006-5250	EX3DV4 - SN7346	DAE4 Sn853	2.19	23.20	21.9	-5.60
2019/11/22	5600	100	D5GHzV2-1006-5600	EX3DV4 - SN7346	DAE4 Sn853	2.27	23.80	22.7	-4.62

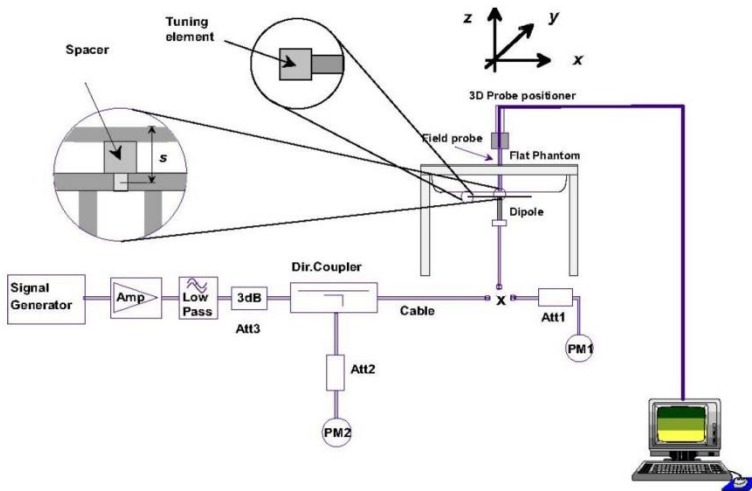


Fig 8.3.1 System Performance Check Setup



Fig 8.3.2 Setup Photo

10. RF Exposure Positions

10.1 Ear and handset reference point

Figure 9.1.1 shows the front, back, and side views of the SAM phantom. The center-of-mouth reference point is labeled “M,” the left ear reference point (ERP) is marked “LE,” and the right ERP is marked “RE.” Each ERP is 15 mm along the B-M (back-mouth) line behind the entrance-to-ear-canal (EEC) point, as shown in Figure 9.1.2 The Reference Plane is defined as passing through the two ear reference points and point M. The line N-F (neck-front), also called the reference pivoting line, is normal to the Reference Plane and perpendicular to both a line passing through RE and LE and the B-M line (see Figure 9.1.3). Both N-F and B-M lines should be marked on the exterior of the phantom shell to facilitate handset positioning. Posterior to the N-F line the ear shape is a flat surface with 6 mm thickness at each ERP, and forward of the N-F line the ear is truncated, as illustrated in Figure 9.1.2. The ear truncation is introduced to preclude the ear lobe from interfering with handset tilt, which could lead to unstable positioning at the cheek.

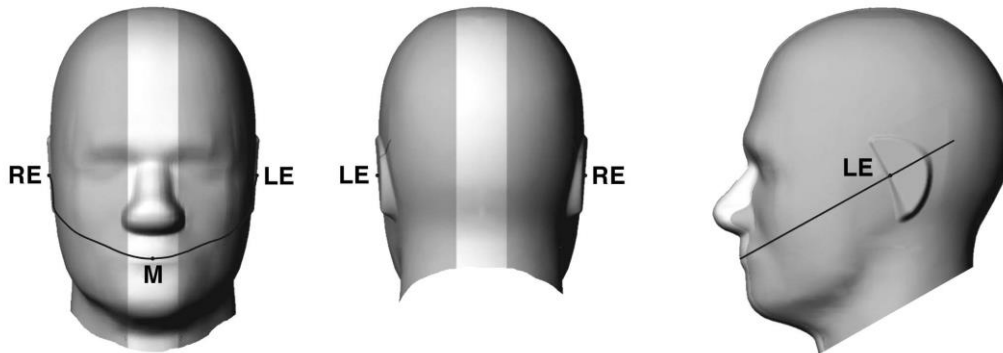


Fig 9.1.1 Front, back, and side views of SAM twin phantom

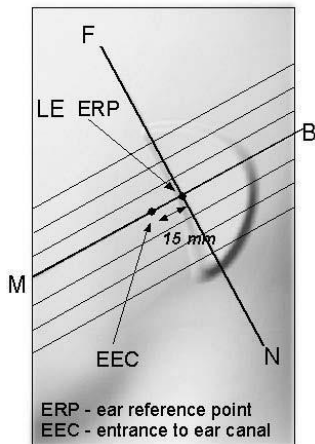


Fig 9.1.2 Close-up side view of phantom showing the ear region.

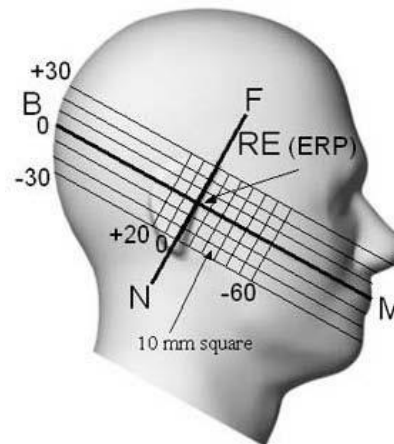


Fig 9.1.3 Side view of the phantom showing relevant markings and seven cross-sectional plane locations

10.2 Definition of the cheek position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. Define two imaginary lines on the handset—the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset—the midpoint of the width w_t of the handset at the level of the acoustic output (point A in Figure 9.2.1 and Figure 9.2.2), and the midpoint of the width w_b of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Figure 9.2.1). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Figure 9.2.2), especially for clamshell handsets, handsets with flip covers, and other irregularly-shaped handsets.
3. Position the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 9.2.3), such that the plane defined by the vertical centerline and the horizontal line of the handset is approximately parallel to the sagittal plane of the phantom.
4. Translate the handset towards the phantom along the line passing through RE and LE until handset point A touches the pinna at the ERP.
5. While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to the plane containing B-M and N-F lines, i.e., the Reference Plane.
6. Rotate the handset around the vertical centerline until the handset (horizontal line) is parallel to the N-F line.
7. While maintaining the vertical centerline in the Reference Plane, keeping point A on the line passing through RE and LE, and maintaining the handset contact with the pinna, rotate the handset about the N-F line until any point on the handset is in contact with a phantom point below the pinna on the cheek. See Figure 9.2.3. The actual rotation angles should be documented in the test report.

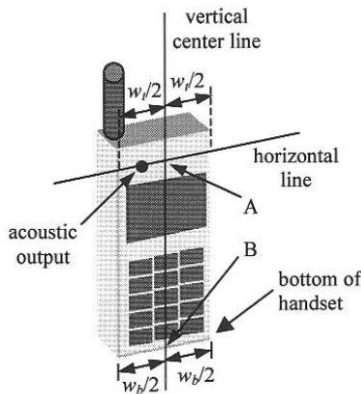


Fig 9.2.1 Handset vertical and horizontal reference lines—“fixed case”

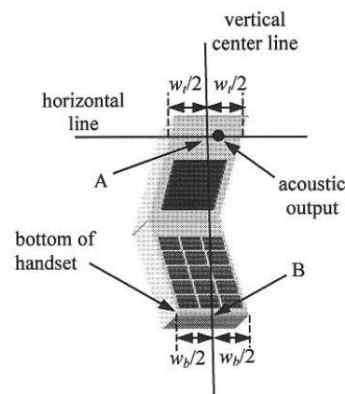


Fig 9.2.2 Handset vertical and horizontal reference lines—“clam-shell case”

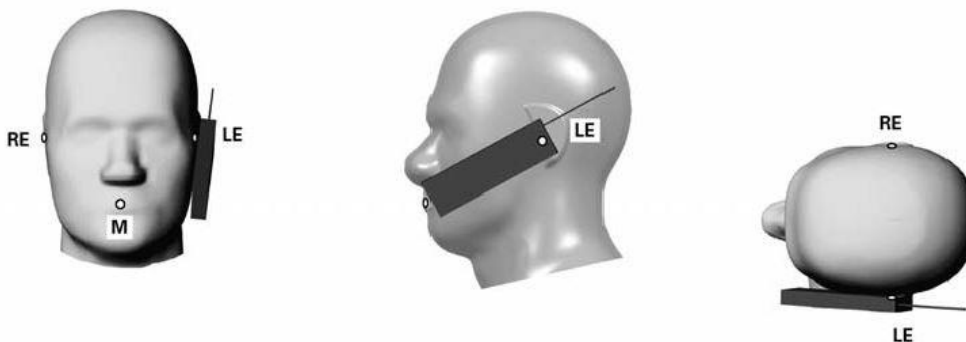


Fig 9.2.3 cheek or touch position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which establish the Reference Plane for handset positioning, are indicated.

10.3 Definition of the tilt position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. While maintaining the orientation of the handset, move the handset away from the pinna along the line passing through RE and LE far enough to allow a rotation of the handset away from the cheek by 15°.
3. Rotate the handset around the horizontal line by 15°.
4. While maintaining the orientation of the handset, move the handset towards the phantom on the line passing through RE and LE until any part of the handset touches the ear. The tilt position is obtained when the contact point is on the pinna. See Figure 9.3.1. If contact occurs at any location other than the pinna, e.g., the antenna at the back of the phantom head, the angle of the handset should be reduced. In this case, the tilt position is obtained if any point on the handset is in contact with the pinna and a second point

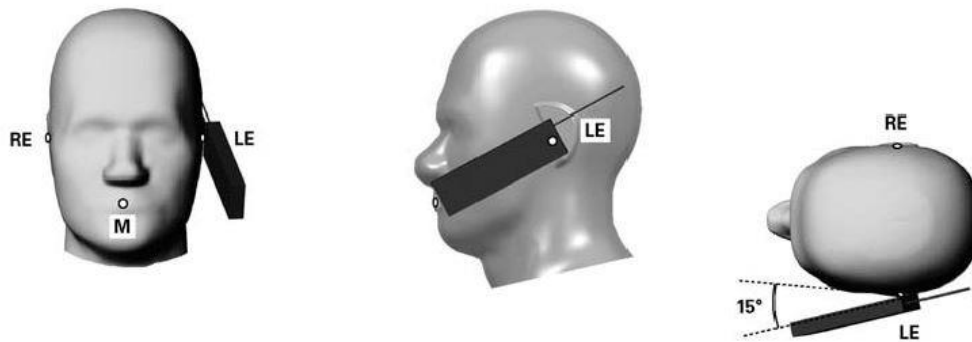


Fig 9.3.1 Tilt position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which define the Reference Plane for handset positioning, are indicated.

10.4 Body Worn Accessory

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 9.4). Per KDB648474 D04v01r03, body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB 447498 D01v06 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for body-worn accessory, measured without a headset connected to the handset is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a handset attached to the handset.

Accessories for body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are test with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-chip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

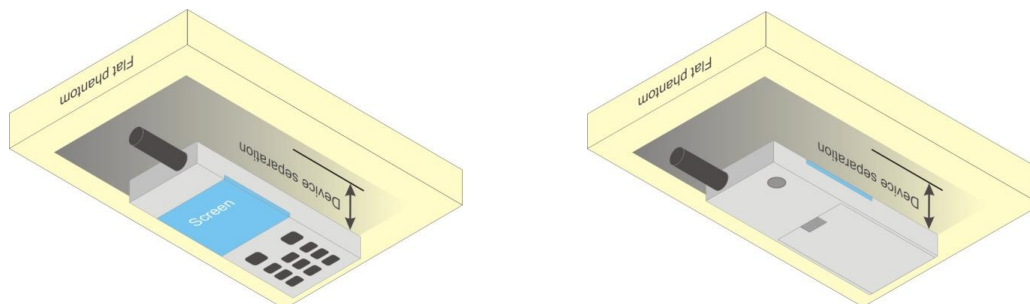


Fig 9.4 Body Worn Position



10.5 Wireless Router

Some battery-operated handsets have the capability to transmit and receive user through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06 v02r01 where SAR test considerations for handsets ($L \times W \geq 9 \text{ cm} \times 5 \text{ cm}$) are based on a composite test separation distance of 10mm from the front, back and edges of the device containing transmitting antennas within 2.5cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v06 publication procedures. The "Portable Hotspot" feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

10.6 Extremity Exposure

For smart phones with a display diagonal dimension $> 15.0 \text{ cm}$ or an overall diagonal dimension $> 16.0 \text{ cm}$ that provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets that support voice calls next to the ear, According to KDB648474 D04v01r03, the following phablet procedures should be applied to evaluate SAR compliance for each applicable wireless modes and frequency band. Devices marketed as phablets, regardless of form factors and operating characteristics must be tested as a phablet to determine SAR compliance

1. The normally required head and body-worn accessory SAR test procedures for handsets, including hotspot mode, must be applied.
2. The UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna located at $\leq 25 \text{ mm}$ from that surface or edge, in direct contact with a flat phantom, for 10-g extremity SAR according to the body-equivalent tissue dielectric parameters in KDB 865664 to address interactive hand use exposure conditions.6 The UMPC mini-tablet 1-g SAR at 5 mm is not required. When hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR $> 1.2 \text{ W/kg}$.



11. WWAN Conducted RF Output Power (Unit: dBm)

<GSM Conducted Power>

General Note:

1. Per KDB 447498 D01v06, the maximum output power channel is used for SAR testing and for further SAR test reduction.
2. Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE / DTM modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the GPRS (4Tx slots) for GSM850/GSM1900 is considered as the primary mode.
3. Other configurations of GSM / GPRS / EDGE / DTM are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode, SAR measurement is not required for the secondary mode

<WiFi off>

Power Selection	Transmit Antenna	GSM850		Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
		TX Channel	128	189	251	128		189	251		
Head / Hotspot / Body-worn / Product Specific	Ant 0 / Ant 1	Frequency (MHz)	824.2	836.4	848.8			824.2	836.4	848.8	
		GSM 1 Tx slot	33.04	32.96	33.03	34.00	24.04	23.96	24.03	24.70	
		GPRS 1 Tx slot	33.04	33.04	32.90	34.00	24.04	24.04	23.90	24.70	
		GPRS 2 Tx slots	31.15	31.14	31.36	32.00	25.15	25.14	25.36	26.00	
		GPRS 3 Tx slots	29.21	29.43	29.55	30.00	24.95	25.17	25.29	25.74	
		GPRS 4 Tx slots	28.10	28.51	28.24	29.00	25.10	25.51	25.24	26.00	
		EDGE 1 Tx slot	27.25	27.24	27.36	28.00	18.25	18.24	18.36	19.00	
		EDGE 2 Tx slots	26.30	26.59	26.30	27.00	20.30	20.59	20.30	21.00	
		EDGE 3 Tx slots	24.14	24.07	24.38	25.00	19.88	19.81	20.12	20.74	
		EDGE 4 Tx slots	21.82	21.99	21.97	23.00	18.82	18.99	18.97	20.00	
		DTM Multi-slot class 5	GSM 1 Tx slot	31.03	31.15	31.26	32.00	24.95	25.08	25.17	25.98
			GPRS 1 Tx slot	30.91	31.05	31.12	32.00				
		DTM Multi-slot class 9	GSM 1 Tx slot	31.24	30.98	31.03	32.00	25.15	24.89	24.94	25.98
			GPRS 1 Tx slot	31.11	30.85	30.88	32.00				
		DTM Multi-slot class 11	GSM 1 Tx slot	29.05	29.26	29.12	30.00	24.74	24.89	24.85	25.74
			GPRS 2 Tx slots	28.97	29.10	29.10	30.00				
		DTM Multi-slot class 5	GSM 1 Tx slot	31.14	31.28	31.31	32.00	23.29	23.40	23.42	24.16
			EDGE 1 Tx slot	26.09	26.11	26.08	27.00				
		DTM Multi-slot class 9	GSM 1 Tx slot	31.25	31.40	31.02	32.00	23.34	23.46	23.14	24.16
			EDGE 1 Tx slot	25.95	25.97	25.85	27.00				
DTM Multi-slot class 11	GSM 1 Tx slot	28.93	29.09	29.17	30.00	22.05	22.13	22.18	23.10		
	EDGE 2 Tx slots	23.99	23.95	23.94	25.00						



<Wifi on>

Power Selection	Transmit Antenna	GSM850		Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)		
		TX Channel		128	189	251		128	189	251			
		Frequency (MHz)		824.2	836.4	848.8		824.2	836.4	848.8			
Head	Ant 0	GSM 1 Tx slot		33.04	32.96	33.03	34.00	24.04	23.96	24.03	24.70		
		GPRS 1 Tx slot		33.04	33.04	32.90	34.00	24.04	24.04	23.90	24.70		
		GPRS 2 Tx slots		31.15	31.14	31.36	32.00	25.15	25.14	25.36	26.00		
		GPRS 3 Tx slots		29.21	29.43	29.55	30.00	24.95	25.17	25.29	25.74		
		GPRS 4 Tx slots		28.10	28.51	28.24	29.00	25.10	25.51	25.24	26.00		
		EDGE 1 Tx slot		27.25	27.24	27.36	28.00	18.25	18.24	18.36	19.00		
		EDGE 2 Tx slots		26.30	26.59	26.30	27.00	20.30	20.59	20.30	21.00		
		EDGE 3 Tx slots		24.14	24.07	24.38	25.00	19.88	19.81	20.12	20.74		
		EDGE 4 Tx slots		21.82	21.99	21.97	23.00	18.82	18.99	18.97	20.00		
		DTM Multi-slot class 5		GSM 1 Tx slot		31.03	31.15	31.26	32.00	24.95	25.08	25.17	25.98
				GPRS 1 Tx slot		30.91	31.05	31.12	32.00				
		DTM Multi-slot class 9		GSM 1 Tx slot		31.24	30.98	31.03	32.00	25.15	24.89	24.94	25.98
				GPRS 1 Tx slot		31.11	30.85	30.88	32.00				
		DTM Multi-slot class 11		GSM 1 Tx slot		29.05	29.26	29.12	30.00	24.74	24.89	24.85	25.74
				GPRS 2 Tx slots		28.97	29.10	29.10	30.00				
		DTM Multi-slot class 5		GSM 1 Tx slot		31.14	31.28	31.31	32.00	23.29	23.40	23.42	24.16
				EDGE 1 Tx slot		26.09	26.11	26.08	27.00				
		DTM Multi-slot class 9		GSM 1 Tx slot		31.25	31.40	31.02	32.00	23.34	23.46	23.14	24.16
				EDGE 1 Tx slot		25.95	25.97	25.85	27.00				
		DTM Multi-slot class 11		GSM 1 Tx slot		28.93	29.09	29.17	30.00	22.05	22.13	22.18	23.10
				EDGE 2 Tx slots		23.99	23.95	23.94	25.00				

Power Selection	Transmit Antenna	GSM850		Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)		
		TX Channel		128	189	251		128	189	251			
		Frequency (MHz)		824.2	836.4	848.8		824.2	836.4	848.8			
Hotspot / Body-worn / Product Specific	Ant 0	GSM 1 Tx slot		30.94	31.02	30.97	31.70	21.94	22.02	21.97	22.70		
		GPRS 1 Tx slot		30.95	31.04	30.98	31.70	21.95	22.04	21.98	22.70		
		GPRS 2 Tx slots		29.05	29.23	29.28	30.00	23.05	23.23	23.28	24.00		
		GPRS 3 Tx slots		27.30	27.42	27.52	28.00	23.04	23.16	23.26	23.74		
		GPRS 4 Tx slots		26.03	26.42	26.33	27.00	23.03	23.42	23.33	24.00		
		EDGE 1 Tx slot		25.20	25.34	25.26	26.00	16.20	16.34	16.26	17.00		
		EDGE 2 Tx slots		24.20	24.57	24.20	25.00	18.20	18.57	18.20	19.00		
		EDGE 3 Tx slots		22.06	22.15	22.33	23.00	17.80	17.89	18.07	18.74		
		EDGE 4 Tx slots		19.82	19.98	19.98	21.00	16.82	16.98	16.98	18.00		
		DTM Multi-slot class 5		GSM 1 Tx slot		29.21	29.45	29.62	30.00	23.12	23.36	23.53	23.98
				GPRS 1 Tx slot		29.07	29.31	29.47	30.00				
		DTM Multi-slot class 9		GSM 1 Tx slot		29.23	29.39	29.09	30.00	23.14	23.30	23.00	23.98
				GPRS 1 Tx slot		29.09	29.25	28.94	30.00				
		DTM Multi-slot class 11		GSM 1 Tx slot		27.07	27.24	27.28	28.00	22.72	22.87	22.93	23.74
				GPRS 2 Tx slots		26.93	27.08	27.14	28.00				
		DTM Multi-slot class 5		GSM 1 Tx slot		29.15	28.97	29.01	30.00	21.28	21.15	21.17	22.16
				EDGE 1 Tx slot		24.01	24.04	24.02	25.00				
		DTM Multi-slot class 9		GSM 1 Tx slot		29.28	29.05	29.11	30.00	21.33	21.16	21.20	22.16
				EDGE 1 Tx slot		23.80	23.84	23.82	25.00				
		DTM Multi-slot class 11		GSM 1 Tx slot		27.01	27.18	27.26	28.00	20.03	20.15	20.19	21.10
				EDGE 2 Tx slots		21.81	21.84	21.82	23.00				



<WiFi off>

Power Selection	Transmit Antenna	GSM1900		Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)	
		TX Channel		512	661	810		512	661	810		
		Frequency (MHz)		1850.2	1880	1909.8		1850.2	1880	1909.8		
Head	Ant 0	GSM 1 Tx slot		30.78	30.93	30.79	31.00	21.78	21.93	21.79	22.00	
		GPRS 1 Tx slot		30.97	30.90	30.88	31.00	21.97	21.90	21.88	22.00	
		GPRS 2 Tx slots		29.33	29.19	29.28	29.50	23.33	23.19	23.28	23.50	
		GPRS 3 Tx slots		27.20	27.19	27.21	27.50	22.94	22.93	22.95	23.24	
		GPRS 4 Tx slots		26.11	25.97	26.08	26.50	23.11	22.97	23.08	23.50	
		EDGE 1 Tx slot		26.84	26.78	26.81	27.00	17.84	17.78	17.81	18.00	
		EDGE 2 Tx slots		25.66	25.44	25.54	26.00	19.66	19.44	19.54	20.00	
		EDGE 3 Tx slots		24.63	24.27	24.44	25.00	20.37	20.01	20.18	20.74	
		EDGE 4 Tx slots		23.29	22.97	22.98	24.00	20.29	19.97	19.98	21.00	
		DTM Multi-slot class 5		GSM 1 Tx slot	28.47	28.32	28.26	29.50	22.36	22.25	22.17	23.48
				GPRS 1 Tx slot	28.28	28.23	28.12	29.50				
		DTM Multi-slot class 9		GSM 1 Tx slot	28.36	28.31	28.24	29.50	22.28	22.22	22.15	23.48
				GPRS 1 Tx slot	28.25	28.18	28.11	29.50				
		DTM Multi-slot class 11		GSM 1 Tx slot	26.57	26.42	26.54	27.50	22.23	22.07	22.18	23.24
				GPRS 2 Tx slots	26.45	26.29	26.39	27.50				
		DTM Multi-slot class 5		GSM 1 Tx slot	28.29	28.14	28.06	29.50	21.09	20.95	20.90	22.07
				EDGE 1 Tx slot	25.48	25.36	25.38	26.00				
		DTM Multi-slot class 9		GSM 1 Tx slot	28.31	28.26	28.19	29.50	21.06	20.98	20.93	22.07
				EDGE 1 Tx slot	25.35	25.21	25.22	26.00				
		DTM Multi-slot class 11		GSM 1 Tx slot	26.42	26.17	26.31	27.50	20.91	20.70	20.79	21.74
				EDGE 2 Tx slots	24.38	24.19	24.25	25.00				

Power Selection	Transmit Antenna	GSM1900		Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)	
		TX Channel		512	661	810		512	661	810		
		Frequency (MHz)		1850.2	1880	1909.8		1850.2	1880	1909.8		
Hotspot / Body-worn / Product Specific	Ant 0	GSM 1 Tx slot		30.78	30.93	30.79	31.00	21.78	21.93	21.79	22.00	
		GPRS 1 Tx slot		30.97	30.90	30.88	31.00	21.97	21.90	21.88	22.00	
		GPRS 2 Tx slots		29.33	29.19	29.28	29.50	23.33	23.19	23.28	23.50	
		GPRS 3 Tx slots		27.20	27.19	27.21	27.50	22.94	22.93	22.95	23.24	
		GPRS 4 Tx slots		25.84	25.81	25.78	26.50	22.84	22.81	22.78	23.50	
		EDGE 1 Tx slot		26.84	26.78	26.81	27.00	17.84	17.78	17.81	18.00	
		EDGE 2 Tx slots		25.66	25.44	25.54	26.00	19.66	19.44	19.54	20.00	
		EDGE 3 Tx slots		24.63	24.27	24.44	25.00	20.37	20.01	20.18	20.74	
		EDGE 4 Tx slots		23.29	22.97	22.98	24.00	20.29	19.97	19.98	21.00	
		DTM Multi-slot class 5		GSM 1 Tx slot	28.47	28.32	28.26	29.50	22.36	22.25	22.17	23.48
				GPRS 1 Tx slot	28.28	28.23	28.12	29.50				
		DTM Multi-slot class 9		GSM 1 Tx slot	28.36	28.31	28.24	29.50	22.28	22.22	22.15	23.48
				GPRS 1 Tx slot	28.25	28.18	28.11	29.50				
		DTM Multi-slot class 11		GSM 1 Tx slot	26.57	26.42	26.54	27.50	22.23	22.07	22.18	23.24
				GPRS 2 Tx slots	26.45	26.29	26.39	27.50				
		DTM Multi-slot class 5		GSM 1 Tx slot	28.29	28.14	28.06	29.50	21.09	20.95	20.90	22.07
				EDGE 1 Tx slot	25.48	25.36	25.38	26.00				
		DTM Multi-slot class 9		GSM 1 Tx slot	28.31	28.26	28.19	29.50	21.06	20.98	20.93	22.07
				EDGE 1 Tx slot	25.35	25.21	25.22	26.00				
		DTM Multi-slot class 11		GSM 1 Tx slot	26.42	26.17	26.31	27.50	20.91	20.70	20.79	21.74
				EDGE 2 Tx slots	24.38	24.19	24.25	25.00				



<Wifi on>

Power Selection	Transmit Antenna	GSM1900		Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)	
		TX Channel		512	661	810		512	661	810		
		Frequency (MHz)		1850.2	1880	1909.8		1850.2	1880	1909.8		
Head	Ant 0	GSM 1 Tx slot		30.78	30.93	30.79	31.00	21.78	21.93	21.79	22.00	
		GPRS 1 Tx slot		30.97	30.90	30.88	31.00	21.97	21.90	21.88	22.00	
		GPRS 2 Tx slots		29.33	29.19	29.28	29.50	23.33	23.19	23.28	23.50	
		GPRS 3 Tx slots		27.20	27.19	27.21	27.50	22.94	22.93	22.95	23.24	
		GPRS 4 Tx slots		26.11	25.97	26.08	26.50	23.11	22.97	23.08	23.50	
		EDGE 1 Tx slot		26.84	26.78	26.81	27.00	17.84	17.78	17.81	18.00	
		EDGE 2 Tx slots		25.66	25.44	25.54	26.00	19.66	19.44	19.54	20.00	
		EDGE 3 Tx slots		24.63	24.27	24.44	25.00	20.37	20.01	20.18	20.74	
		EDGE 4 Tx slots		23.29	22.97	22.98	24.00	20.29	19.97	19.98	21.00	
		DTM Multi-slot class 5		GSM 1 Tx slot	28.47	28.32	28.26	29.50	22.36	22.25	22.17	23.48
				GPRS 1 Tx slot	28.28	28.23	28.12	29.50				
		DTM Multi-slot class 9		GSM 1 Tx slot	28.36	28.31	28.24	29.50	22.28	22.22	22.15	23.48
				GPRS 1 Tx slot	28.25	28.18	28.11	29.50				
		DTM Multi-slot class 11		GSM 1 Tx slot	26.57	26.42	26.54	27.50	22.23	22.07	22.18	23.24
				GPRS 2 Tx slots	26.45	26.29	26.39	27.50				
		DTM Multi-slot class 5		GSM 1 Tx slot	28.29	28.14	28.06	29.50	21.09	20.95	20.90	22.07
				EDGE 1 Tx slot	25.48	25.36	25.38	26.00				
		DTM Multi-slot class 9		GSM 1 Tx slot	28.31	28.26	28.19	29.50	21.06	20.98	20.93	22.07
				EDGE 1 Tx slot	25.35	25.21	25.22	26.00				
		DTM Multi-slot class 11		GSM 1 Tx slot	26.42	26.17	26.31	27.50	20.91	20.70	20.79	21.74
				EDGE 2 Tx slots	24.38	24.19	24.25	25.00				

Power Selection	Transmit Antenna	GSM1900		Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)	
		TX Channel		512	661	810		512	661	810		
		Frequency (MHz)		1850.2	1880	1909.8		1850.2	1880	1909.8		
Hotspot / Body-worn / Product Specific	Ant 0	GSM 1 Tx slot		24.87	24.87	24.88	25.00	15.87	15.87	15.88	16.00	
		GPRS 1 Tx slot		24.89	24.97	24.90	25.00	15.89	15.97	15.90	16.00	
		GPRS 2 Tx slots		23.27	23.24	23.24	23.50	17.27	17.24	17.24	17.50	
		GPRS 3 Tx slots		21.21	21.14	21.12	21.50	16.95	16.88	16.86	17.24	
		GPRS 4 Tx slots		20.19	20.03	19.99	20.50	17.19	17.03	16.99	17.50	
		EDGE 1 Tx slot		20.78	20.82	20.73	21.00	11.78	11.82	11.73	12.00	
		EDGE 2 Tx slots		19.74	19.51	19.45	20.00	13.74	13.51	13.45	14.00	
		EDGE 3 Tx slots		18.60	18.20	18.47	19.00	14.34	13.94	14.21	14.74	
		EDGE 4 Tx slots		17.33	17.01	16.93	18.00	14.33	14.01	13.93	15.00	
		DTM Multi-slot class 5		GSM 1 Tx slot	23.17	23.03	23.28	23.50	17.02	16.96	17.19	17.48
				GPRS 1 Tx slot	22.90	22.94	23.13	23.50				
		DTM Multi-slot class 9		GSM 1 Tx slot	23.02	22.98	23.08	23.50	16.96	16.92	17.02	17.48
				GPRS 1 Tx slot	22.95	22.90	23.01	23.50				
		DTM Multi-slot class 11		GSM 1 Tx slot	20.99	20.84	20.94	21.50	16.63	16.53	16.62	17.24
				GPRS 2 Tx slots	20.84	20.77	20.85	21.50				
		DTM Multi-slot class 5		GSM 1 Tx slot	22.84	22.79	23.09	23.50	15.43	15.47	15.57	16.07
				EDGE 1 Tx slot	19.40	19.62	19.28	20.00				
		DTM Multi-slot class 9		GSM 1 Tx slot	23.05	23.01	23.11	23.50	15.55	15.47	15.58	16.07
				EDGE 1 Tx slot	19.31	19.13	19.27	20.00				
		DTM Multi-slot class 11		GSM 1 Tx slot	20.94	20.79	20.89	21.50	15.19	14.97	15.06	15.74
				EDGE 2 Tx slots	18.46	18.18	18.26	19.00				

<WCDMA Conducted Power>

1. The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.
2. The procedures in KDB 941225 D01v03r01 are applied for 3GPP Rel. 6 HSPA to configure the device in the required sub-test mode(s) to determine SAR test exclusion.
3. For DC-HSDPA, the device was configured according to the H-Set 12, Fixed Reference Channel (FRC) configuration in Table C.8.1.12 of 3GPP TS 34.121-1, with the primary and the secondary serving HS-DSCH Cell enabled during the power measurement.

A summary of these settings are illustrated below:

HSDPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set Gain Factors (β_c and β_d) and parameters were set according to each
 - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - iii. Set RMC 12.2Kbps + HSDPA mode.
 - iv. Set Cell Power = -86 dBm
 - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
 - vi. Select HSDPA Uplink Parameters
 - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
 - viii. Set Ack-Nack Repetition Factor to 3
 - ix. Set CQI Feedback Cycle (k) to 4 ms
 - x. Set CQI Repetition Factor to 2
 - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1: $\Delta_{ACK}, \Delta_{NACK}$ and $\Delta_{CQI} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$.

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$, and $\Delta_{CQI} = 24/15$ with $\beta_{HS} = 24/15 * \beta_c$.

Note 3: CM = 1 for $\beta_c/\beta_d = 12/15, \beta_{HS}/\beta_c = 24/15$. For all other combinations of DPCCH, DPDCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

Setup Configuration

HSUPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting * :
 - i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
 - ii. Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
 - iii. Set Cell Power = -86 dBm
 - iv. Set Channel Type = 12.2k + HSPA
 - v. Set UE Target Power
 - vi. Power Ctrl Mode= Alternating bits
 - vii. Set and observe the E-TFCl
 - viii. Confirm that E-TFCl is equal to the target E-TFCl of 75 for sub-test 1, and other subtest's E-TFCl
- d. The transmitted maximum output power was recorded.

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note1)	β_{ec}	β_{ed} (Note 4) (Note 5)	β_{ed} (SF)	β_{ed} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2) (Note 6)	AG Index (Note 5)	E-TFCl
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}: 47/15$ $\beta_{ed2}: 47/15$	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15	0	-	-	5/15	5/15	47/15	4	1	1.0	0.0	12	67

Note 1: For sub-test 1 to 4, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$. For sub-test 5, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 5/15$ with $\beta_{hs} = 5/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 5: β_{ed} can not be set directly; it is set by Absolute Grant Value.

Note 6: For subtests 2, 3 and 4, UE may perform E-DPDCH power scaling at max power which could results in slightly smaller MPR values.

Setup Configuration

DC-HSDPA 3GPP release 8 Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration below
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set RMC 12.2Kbps + HSDPA mode.
 - ii. Set Cell Power = -25 dBm
 - iii. Set HS-DSCH Configuration Type to FRC (H-set 12, QPSK)
 - iv. Select HSDPA Uplink Parameters
 - v. Set Gain Factors (β_c and β_d) and parameters were set according to each Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - a). Subtest 1: $\beta_c/\beta_d=2/15$
 - b). Subtest 2: $\beta_c/\beta_d=12/15$
 - c). Subtest 3: $\beta_c/\beta_d=15/8$
 - d). Subtest 4: $\beta_c/\beta_d=15/4$
 - vi. Set Delta ACK, Delta NACK and Delta CQI = 8
 - vii. Set Ack-Nack Repetition Factor to 3
 - viii. Set CQI Feedback Cycle (k) to 4 ms
 - ix. Set CQI Repetition Factor to 2
 - x. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification. A summary of these settings are illustrated below:

C.8.1.12 Fixed Reference Channel Definition H-Set 12

Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table. Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

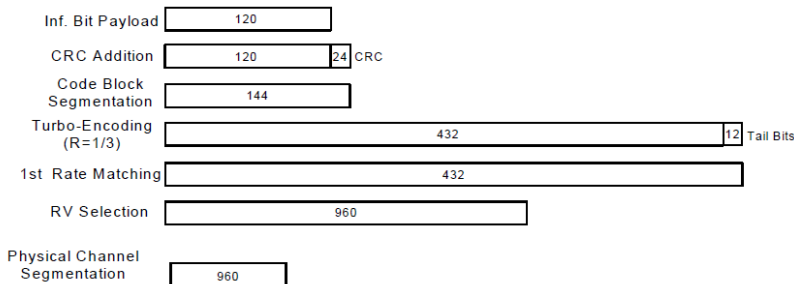


Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)

Setup Configuration



<WCDMA Conducted Power>

General Note:

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is ≤ ¼ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA, and according to the following RF output power, the output power results of the secondary modes (HSUPA, HSDPA, DC-HSDPA) are less than ¼ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA.

<WiFi off>

Power Selection	Transmit Antenna	Band		WCDMA II		
		TX Channel		9262	9400	9538
		Rx Channel		9662	9800	9938
		Frequency (MHz)		1852.4	1880	1907.6
		Max. Power		25.7		
Head	Ant 0	3GPP Rel 99	AMR 12.2Kbps	25.44	25.41	25.38
		3GPP Rel 99	RMC 12.2Kbps	25.54	25.48	25.52
		Max. Power		25.1		
		3GPP Rel 6	HSDPA Subtest-1	24.85	24.88	24.72
		3GPP Rel 6	HSDPA Subtest-2	24.81	25.01	25.04
		3GPP Rel 6	HSDPA Subtest-3	24.17	24.37	24.30
		3GPP Rel 6	HSDPA Subtest-4	24.39	24.45	24.55
		Max. Power		25.1		
		3GPP Rel 8	DC-HSDPA Subtest-1	24.76	24.91	25.02
		3GPP Rel 8	DC-HSDPA Subtest-2	24.67	24.98	24.77
		3GPP Rel 8	DC-HSDPA Subtest-3	23.60	23.80	24.00
		3GPP Rel 8	DC-HSDPA Subtest-4	22.91	22.68	22.81
		Max. Power		25.1		
		3GPP Rel 6	HSUPA Subtest-1	25.04	24.89	24.88
		3GPP Rel 6	HSUPA Subtest-2	22.74	22.93	23.09
		3GPP Rel 6	HSUPA Subtest-3	23.80	23.98	23.87
		3GPP Rel 6	HSUPA Subtest-4	22.71	22.90	22.76
		3GPP Rel 6	HSUPA Subtest-5	24.99	24.81	25.06

Power Selection	Transmit Antenna	Band		WCDMA II		
		TX Channel		9262	9400	9538
		Rx Channel		9662	9800	9938
		Frequency (MHz)		1852.4	1880	1907.6
		Max. Power		25.7		
Hotspot / Body-worn / Product Specific	Ant 0	3GPP Rel 99	AMR 12.2Kbps	25.60	25.53	25.55
		3GPP Rel 99	RMC 12.2Kbps	25.61	25.59	25.60
		Max. Power		25.1		
		3GPP Rel 6	HSDPA Subtest-1	24.92	24.95	24.85
		3GPP Rel 6	HSDPA Subtest-2	24.89	24.91	24.90
		3GPP Rel 6	HSDPA Subtest-3	24.25	24.18	24.26
		3GPP Rel 6	HSDPA Subtest-4	24.22	24.20	24.18
		Max. Power		25.1		
		3GPP Rel 8	DC-HSDPA Subtest-1	24.82	25.90	24.86
		3GPP Rel 8	DC-HSDPA Subtest-2	24.77	24.83	24.82
		3GPP Rel 8	DC-HSDPA Subtest-3	23.92	23.88	23.81
		3GPP Rel 8	DC-HSDPA Subtest-4	23.85	23.84	23.76
		Max. Power		25.1		
		3GPP Rel 6	HSUPA Subtest-1	24.96	24.85	24.86
		3GPP Rel 6	HSUPA Subtest-2	22.64	22.86	22.88
		3GPP Rel 6	HSUPA Subtest-3	23.77	23.78	23.82
		3GPP Rel 6	HSUPA Subtest-4	22.69	22.74	22.84
		3GPP Rel 6	HSUPA Subtest-5	24.88	24.92	24.79



Power Selection	Transmit Antenna	Band		WCDMA IV		
		TX Channel		1312	1413	1513
Head	Ant 0	Rx Channel		1537	1638	1738
		Frequency (MHz)		1712.4	1732.6	1752.6
		Max. Power		24		
		3GPP Rel 99	AMR 12.2Kbps	23.35	23.22	23.39
		3GPP Rel 99	RMC 12.2Kbps	23.46	23.22	23.23
		Max. Power		23		
		3GPP Rel 6	HSDPA Subtest-1	22.32	22.26	22.40
		3GPP Rel 6	HSDPA Subtest-2	22.35	22.24	22.33
		3GPP Rel 6	HSDPA Subtest-3	21.83	21.90	21.78
		3GPP Rel 6	HSDPA Subtest-4	21.84	21.74	21.83
		Max. Power		23		
		3GPP Rel 8	DC-HSDPA Subtest-1	22.52	22.18	22.36
		3GPP Rel 8	DC-HSDPA Subtest-2	22.30	22.34	22.15
		3GPP Rel 8	DC-HSDPA Subtest-3	21.31	21.19	21.43
		3GPP Rel 8	DC-HSDPA Subtest-4	21.90	21.82	21.68
		Max. Power		23		
		3GPP Rel 6	HSUPA Subtest-1	22.36	22.30	22.45
		3GPP Rel 6	HSUPA Subtest-2	20.28	20.28	20.38
		3GPP Rel 6	HSUPA Subtest-3	21.38	21.26	21.26
		3GPP Rel 6	HSUPA Subtest-4	20.37	20.36	20.21
3GPP Rel 6	HSUPA Subtest-5	22.46	22.21	22.28		

Power Selection	Transmit Antenna	Band		WCDMA IV		
		TX Channel		1312	1413	1513
Hotspot / Body-worn / Product Specific	Ant 0 / Ant 1	Rx Channel		1537	1638	1738
		Frequency (MHz)		1712.4	1732.6	1752.6
		Max. Power		24		
		3GPP Rel 99	AMR 12.2Kbps	23.35	23.22	23.39
		3GPP Rel 99	RMC 12.2Kbps	23.46	23.22	23.23
		Max. Power		23		
		3GPP Rel 6	HSDPA Subtest-1	22.32	22.26	22.40
		3GPP Rel 6	HSDPA Subtest-2	22.35	22.24	22.33
		3GPP Rel 6	HSDPA Subtest-3	21.83	21.90	21.78
		3GPP Rel 6	HSDPA Subtest-4	21.84	21.74	21.83
		Max. Power		23		
		3GPP Rel 8	DC-HSDPA Subtest-1	22.52	22.18	22.36
		3GPP Rel 8	DC-HSDPA Subtest-2	22.30	22.34	22.15
		3GPP Rel 8	DC-HSDPA Subtest-3	21.31	21.19	21.43
		3GPP Rel 8	DC-HSDPA Subtest-4	21.90	21.82	21.68
		Max. Power		23		
		3GPP Rel 6	HSUPA Subtest-1	22.36	22.30	22.45
		3GPP Rel 6	HSUPA Subtest-2	20.28	20.28	20.38
		3GPP Rel 6	HSUPA Subtest-3	21.38	21.26	21.26
		3GPP Rel 6	HSUPA Subtest-4	20.37	20.36	20.21
3GPP Rel 6	HSUPA Subtest-5	22.46	22.21	22.28		



<WiFi on>


Power Selection	Transmit Antenna	Band		WCDMA II			WCDMA IV		
		TX Channel		9262	9400	9538	1312	1413	1513
			Rx Channel	9662	9800	9938	1537	1638	1738
			Frequency (MHz)	1852.4	1880	1907.6	1712.4	1732.6	1752.6
			Max. Power	22.6			24		
Head	Ant 0	3GPP Rel 99	AMR 12.2Kbps	22.34	22.40	22.32	23.35	23.22	23.39
		3GPP Rel 99	RMC 12.2Kbps	22.48	22.43	22.34	23.46	23.22	23.23
			Max. Power	22			23		
		3GPP Rel 6	HSDPA Subtest-1	21.70	21.77	21.69	22.32	22.26	22.40
		3GPP Rel 6	HSDPA Subtest-2	21.80	21.84	21.85	22.35	22.24	22.33
		3GPP Rel 6	HSDPA Subtest-3	21.16	21.31	21.30	21.83	21.90	21.78
		3GPP Rel 6	HSDPA Subtest-4	21.19	21.27	21.36	21.84	21.74	21.83
			Max. Power	22			23		
		3GPP Rel 8	DC-HSDPA Subtest-1	21.72	21.76	21.88	22.52	22.18	22.36
		3GPP Rel 8	DC-HSDPA Subtest-2	21.64	21.80	21.75	22.30	22.34	22.15
		3GPP Rel 8	DC-HSDPA Subtest-3	20.45	20.74	20.82	21.31	21.19	21.43
		3GPP Rel 8	DC-HSDPA Subtest-4	19.80	19.57	19.73	21.90	21.82	21.68
			Max. Power	22			23		
		3GPP Rel 6	HSUPA Subtest-1	21.84	21.73	21.84	22.36	22.30	22.45
		3GPP Rel 6	HSUPA Subtest-2	19.69	19.87	19.92	20.28	20.28	20.38
		3GPP Rel 6	HSUPA Subtest-3	20.60	20.82	20.77	21.38	21.26	21.26
		3GPP Rel 6	HSUPA Subtest-4	19.70	19.73	19.68	20.37	20.36	20.21
		3GPP Rel 6	HSUPA Subtest-5	21.80	21.70	21.90	22.46	22.21	22.28

Power Selection	Transmit Antenna	Band		WCDMA II			WCDMA IV		
		TX Channel		9262	9400	9538	1312	1413	1513
			Rx Channel	9662	9800	9938	1537	1638	1738
			Frequency (MHz)	1852.4	1880	1907.6	1712.4	1732.6	1752.6
			Max. Power	19.6			20		
Hotspot / Body-worn / Product Specific	Ant 0	3GPP Rel 99	AMR 12.2Kbps	19.35	19.38	19.37	19.42	19.25	19.30
		3GPP Rel 99	RMC 12.2Kbps	19.39	19.40	19.39	19.44	19.28	19.31
			Max. Power	19			19		
		3GPP Rel 6	HSDPA Subtest-1	18.74	18.72	18.79	18.40	18.22	18.33
		3GPP Rel 6	HSDPA Subtest-2	18.73	18.75	18.83	18.42	18.26	18.23
		3GPP Rel 6	HSDPA Subtest-3	18.26	18.24	18.35	17.91	17.81	17.82
		3GPP Rel 6	HSDPA Subtest-4	18.27	18.24	18.34	17.89	17.80	17.78
			Max. Power	19			19		
		3GPP Rel 8	DC-HSDPA Subtest-1	18.68	18.68	18.80	18.44	18.25	18.38
		3GPP Rel 8	DC-HSDPA Subtest-2	18.72	18.74	18.83	18.40	18.25	18.20
		3GPP Rel 8	DC-HSDPA Subtest-3	17.55	17.71	17.81	17.41	17.28	17.34
		3GPP Rel 8	DC-HSDPA Subtest-4	16.76	16.66	16.83	17.85	17.79	17.75
			Max. Power	19			19		
		3GPP Rel 6	HSUPA Subtest-1	18.88	18.74	18.81	18.44	18.24	18.39
		3GPP Rel 6	HSUPA Subtest-2	16.69	16.81	16.86	16.38	16.26	16.29
		3GPP Rel 6	HSUPA Subtest-3	17.57	17.74	17.83	17.34	17.26	17.26
		3GPP Rel 6	HSUPA Subtest-4	16.68	16.70	16.78	16.35	16.26	16.26
		3GPP Rel 6	HSUPA Subtest-5	18.80	18.70	18.80	18.40	18.30	18.30


<LTE Conducted Power>

General Note:

1. Anritsu MT88201 base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05v02r05, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
7. Per KDB 941225 D05v02r05, Smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
8. For LTE B4 / B12 / B26 / B38 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
9. LTE band 5 / 17 SAR test and the conducted measurement was covered by Band 26 / 12; according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - a. The maximum output power, including tolerance, for the smaller band is \leq the larger band to qualify for the SAR test exclusion.
 - b. The channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band.
10. According to 2017 TCB workshop, for 64 QAM and 16 QAM should be verified by checking the signal constellation with a call box to avoid incorrect maximum power levels due to MPR and other requirements associated with signal modulation, and the following figure is taken from the "Fundamental Measurement >> Modulation Analysis >> constellation" mode of the device connect to the MT8821C base station, therefore, the device 64QAM and 16QAM signal modulation are correct.

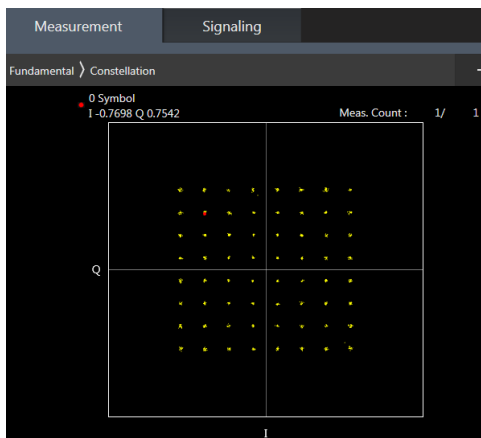

64QAM

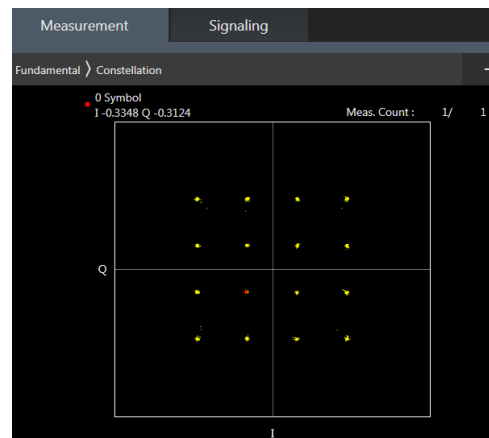

16QAM



<LTE Band 2>

<WiFi off>

Power Selection				Head			Hotspot / Body-worn / Product Specific		
Transmit Antenna				Ant 0			Ant 0		
Max. Power				25.7			25.7		
BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.
Channel				18700	18900	19100	18700	18900	19100
Frequency (MHz)				1860	1880	1900	1860	1880	1900
20	QPSK	1	0	24.50	24.56	24.55	25.06	25.12	25.11
20	QPSK	1	49	24.41	24.49	24.42	24.97	25.05	24.98
20	QPSK	1	99	24.46	24.49	24.45	25.02	25.05	25.01
20	QPSK	50	0	23.49	23.60	23.49	24.05	24.16	24.05
20	QPSK	50	24	23.48	23.58	23.47	24.04	24.14	24.03
20	QPSK	50	50	23.46	23.54	23.46	24.02	24.10	24.02
20	QPSK	100	0	23.48	23.55	23.48	24.04	24.11	24.04
20	16QAM	1	0	23.37	23.49	23.33	23.93	24.05	23.89
20	16QAM	1	49	23.33	23.41	23.37	23.89	23.97	23.93
20	16QAM	1	99	23.34	23.40	23.41	23.90	23.96	23.97
20	16QAM	50	0	22.19	22.25	22.15	22.75	22.81	22.71
20	16QAM	50	24	22.18	22.26	22.16	22.74	22.82	22.72
20	16QAM	50	50	22.13	22.22	22.12	22.69	22.78	22.68
20	16QAM	100	0	22.15	22.22	22.14	22.71	22.78	22.70
20	64QAM	1	0	22.32	22.35	22.19	22.88	22.91	22.75
20	64QAM	1	49	22.24	22.30	22.28	22.80	22.86	22.84
20	64QAM	1	99	22.32	22.30	22.34	22.88	22.86	22.90
20	64QAM	50	0	21.18	21.26	21.15	21.74	21.82	21.71
20	64QAM	50	24	21.20	21.26	21.19	21.76	21.82	21.75
20	64QAM	50	50	21.14	21.19	21.15	21.70	21.75	21.71
20	64QAM	100	0	21.15	21.25	21.14	21.71	21.81	21.70
Channel				18675	18900	19125	18675	18900	19125
Frequency (MHz)				1857.5	1880	1902.5	1857.5	1880	1902.5
15	QPSK	1	0	24.39	24.19	24.28	24.75	24.95	24.84
15	QPSK	1	37	24.32	24.26	24.22	24.82	24.88	24.78
15	QPSK	1	74	24.32	24.27	24.26	24.83	24.88	24.82
15	QPSK	36	0	23.42	23.23	23.31	23.79	23.98	23.87
15	QPSK	36	20	23.31	23.34	23.28	23.90	23.87	23.84
15	QPSK	36	39	23.28	23.30	23.33	23.86	23.84	23.89
15	QPSK	75	0	23.43	23.21	23.19	23.77	23.99	23.75
15	16QAM	1	0	23.20	23.11	23.05	23.67	23.76	23.61
15	16QAM	1	37	23.23	23.07	23.27	23.63	23.79	23.83
15	16QAM	1	74	23.25	23.18	23.19	23.74	23.81	23.75
15	16QAM	36	0	22.05	21.96	21.89	22.52	22.61	22.45
15	16QAM	36	20	22.02	21.95	22.00	22.51	22.58	22.56
15	16QAM	36	39	22.04	21.91	21.97	22.47	22.60	22.53
15	16QAM	75	0	21.96	21.90	21.96	22.46	22.52	22.52
15	64QAM	1	0	22.08	22.22	21.99	22.78	22.64	22.55
15	64QAM	1	37	22.13	22.05	22.14	22.61	22.69	22.70
15	64QAM	1	74	22.19	22.05	22.07	22.61	22.75	22.63
15	64QAM	36	0	21.08	20.99	20.94	21.55	21.64	21.50
15	64QAM	36	20	21.00	21.07	20.92	21.63	21.56	21.48
15	64QAM	36	39	20.97	20.91	20.98	21.47	21.53	21.54
15	64QAM	75	0	20.99	20.99	21.00	21.55	21.55	21.56
Channel				18650	18900	19150	18650	18900	19150
Frequency (MHz)				1855	1880	1905	1855	1880	1905
10	QPSK	1	0	24.36	24.18	24.17	24.74	24.92	24.73
10	QPSK	1	25	24.21	24.22	24.25	24.78	24.77	24.81
10	QPSK	1	49	24.29	24.20	24.37	24.76	24.85	24.93
10	QPSK	25	0	23.43	23.39	23.20	23.95	23.99	23.76
10	QPSK	25	12	23.38	23.34	23.39	23.90	23.94	23.95
10	QPSK	25	25	23.43	23.21	23.17	23.77	23.99	23.73
10	QPSK	50	0	23.35	23.32	23.30	23.88	23.91	23.86
10	16QAM	1	0	23.34	23.09	23.04	23.65	23.90	23.60
10	16QAM	1	25	23.23	23.21	23.24	23.77	23.79	23.80
10	16QAM	1	49	23.23	23.19	23.22	23.75	23.79	23.78
10	16QAM	25	0	21.95	22.01	22.03	22.57	22.51	22.59
10	16QAM	25	12	22.12	22.03	22.00	22.59	22.68	22.56
10	16QAM	25	25	21.94	22.00	21.84	22.56	22.50	22.40
10	16QAM	50	0	21.97	21.96	22.00	22.52	22.53	22.56
10	64QAM	1	0	22.05	22.09	22.08	22.65	22.61	22.64
10	64QAM	1	25	22.03	22.13	22.02	22.69	22.59	22.58
10	64QAM	1	49	22.15	22.12	22.07	22.68	22.71	22.63



FCC SAR TEST REPORT

Report No. : FA891148-06

10	64QAM	25	0	21.13	21.06	20.98	21.62	21.69	21.54
10	64QAM	25	12	21.07	21.07	20.93	21.63	21.63	21.49
10	64QAM	25	25	20.99	20.96	21.02	21.52	21.55	21.58
10	64QAM	50	0	21.08	20.96	20.84	21.52	21.64	21.40
Channel				18625	18900	19175	18625	18900	19175
Frequency (MHz)				1852.5	1880	1907.5	1852.5	1880	1907.5
5	QPSK	1	0	24.32	24.25	24.27	24.81	24.88	24.83
5	QPSK	1	12	24.28	24.31	24.27	24.87	24.84	24.83
5	QPSK	1	24	24.35	24.35	24.33	24.91	24.91	24.89
5	QPSK	12	0	23.37	23.32	23.37	23.88	23.93	23.93
5	QPSK	12	7	23.33	23.22	23.36	23.78	23.89	23.92
5	QPSK	12	13	23.42	23.36	23.16	23.92	23.98	23.72
5	QPSK	25	0	23.27	23.38	23.31	23.94	23.83	23.87
5	16QAM	1	0	23.33	23.15	23.07	23.71	23.89	23.63
5	16QAM	1	12	23.18	23.16	23.27	23.72	23.74	23.83
5	16QAM	1	24	23.11	23.07	23.24	23.63	23.67	23.80
5	16QAM	12	0	22.04	21.95	21.87	22.51	22.60	22.43
5	16QAM	12	7	22.16	22.04	21.88	22.60	22.72	22.44
5	16QAM	12	13	21.97	21.90	21.91	22.46	22.53	22.47
5	16QAM	25	0	21.96	21.89	21.96	22.45	22.52	22.52
5	64QAM	1	0	22.23	22.14	21.99	22.70	22.79	22.55
5	64QAM	1	12	22.16	21.98	22.07	22.54	22.72	22.63
5	64QAM	1	24	22.09	22.10	22.14	22.66	22.65	22.70
5	64QAM	12	0	21.08	21.07	20.96	21.63	21.64	21.52
5	64QAM	12	7	21.15	20.94	21.07	21.50	21.71	21.63
5	64QAM	12	13	20.92	20.99	20.91	21.55	21.48	21.47
5	64QAM	25	0	21.14	20.92	20.87	21.48	21.70	21.43
Channel				18615	18900	19185	18615	18900	19185
Frequency (MHz)				1851.5	1880	1908.5	1851.5	1880	1908.5
3	QPSK	1	0	24.34	24.28	24.19	24.84	24.90	24.75
3	QPSK	1	8	24.22	24.16	24.24	24.72	24.78	24.80
3	QPSK	1	14	24.22	24.24	24.37	24.80	24.78	24.93
3	QPSK	8	0	23.36	23.34	23.32	23.90	23.92	23.88
3	QPSK	8	4	23.42	23.30	23.33	23.86	23.98	23.89
3	QPSK	8	7	23.38	23.29	23.19	23.85	23.94	23.75
3	QPSK	15	0	23.33	23.32	23.21	23.88	23.89	23.77
3	16QAM	1	0	23.37	23.13	23.20	23.69	23.93	23.76
3	16QAM	1	8	23.25	23.19	23.10	23.75	23.81	23.66
3	16QAM	1	14	23.26	23.13	23.27	23.69	23.82	23.83
3	16QAM	8	0	22.06	22.01	21.92	22.57	22.62	22.48
3	16QAM	8	4	21.99	22.03	22.06	22.59	22.55	22.62
3	16QAM	8	7	21.97	22.03	21.95	22.59	22.53	22.51
3	16QAM	15	0	22.03	21.98	21.93	22.54	22.59	22.49
3	64QAM	1	0	22.17	22.06	21.98	22.62	22.73	22.54
3	64QAM	1	8	22.03	22.03	22.18	22.59	22.59	22.74
3	64QAM	1	14	22.10	22.14	22.17	22.70	22.66	22.73
3	64QAM	8	0	21.08	21.07	20.96	21.63	21.64	21.52
3	64QAM	8	4	21.05	21.01	21.02	21.57	21.61	21.58
3	64QAM	8	7	20.96	20.84	20.94	21.40	21.52	21.50
3	64QAM	15	0	21.11	21.03	20.94	21.59	21.67	21.50
Channel				18607	18900	19193	18607	18900	19193
Frequency (MHz)				1850.7	1880	1909.3	1850.7	1880	1909.3
1.4	QPSK	1	0	24.30	24.16	24.23	24.72	24.86	24.79
1.4	QPSK	1	3	24.34	24.24	24.31	24.80	24.90	24.87
1.4	QPSK	1	5	24.25	24.16	24.22	24.72	24.81	24.78
1.4	QPSK	3	0	24.33	24.19	24.27	24.75	24.89	24.83
1.4	QPSK	3	1	24.36	24.26	24.31	24.82	24.92	24.87
1.4	QPSK	3	3	24.31	24.20	24.28	24.76	24.87	24.84
1.4	QPSK	6	0	23.30	23.21	23.28	23.77	23.86	23.84
1.4	16QAM	1	0	23.59	23.49	23.52	24.05	24.15	24.08
1.4	16QAM	1	3	23.68	23.61	23.65	24.17	24.24	24.21
1.4	16QAM	1	5	23.59	23.50	23.49	24.06	24.15	24.05
1.4	16QAM	3	0	23.40	23.29	23.35	23.85	23.96	23.91
1.4	16QAM	3	1	23.46	23.34	23.39	23.90	24.02	23.95
1.4	16QAM	3	3	23.39	23.30	23.34	23.86	23.95	23.90
1.4	16QAM	6	0	22.46	22.37	22.41	22.93	23.02	22.97
1.4	64QAM	1	0	22.49	22.42	22.44	22.98	23.05	23.00
1.4	64QAM	1	3	22.55	22.45	22.53	23.01	23.11	23.09
1.4	64QAM	1	5	22.52	22.41	22.43	22.97	23.08	22.99
1.4	64QAM	3	0	22.50	22.41	22.46	22.97	23.06	23.02
1.4	64QAM	3	1	22.56	22.48	22.48	23.04	23.12	23.04
1.4	64QAM	3	3	22.51	22.39	22.41	22.95	23.07	22.97
1.4	64QAM	6	0	21.37	21.28	21.35	21.84	21.93	21.91



<WiFi on>

Power Selection				Head			Hotspot / Body-worn / Product Specific		
Transmit Antenna				Ant 0			Ant 0		
Max. Power				22.7			19.7		
BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.
Channel				18700	18900	19100	18700	18900	19100
Frequency (MHz)				1860	1880	1900	1860	1880	1900
20	QPSK	1	0	21.60	21.62	21.52	18.56	18.61	18.51
20	QPSK	1	49	21.56	21.48	21.41	18.54	18.48	18.40
20	QPSK	1	99	21.52	21.53	21.48	18.53	18.53	18.48
20	QPSK	50	0	21.60	21.61	21.52	18.58	18.60	18.52
20	QPSK	50	24	21.60	21.55	21.48	18.55	18.54	18.50
20	QPSK	50	50	21.57	21.50	21.48	18.57	18.49	18.47
20	QPSK	100	0	21.59	21.50	21.49	18.55	18.60	18.48
20	16QAM	1	0	21.54	21.42	21.37	18.45	18.48	18.38
20	16QAM	1	49	21.45	21.38	21.35	18.45	18.38	18.34
20	16QAM	1	99	21.49	21.40	21.44	18.44	18.46	18.42
20	16QAM	50	0	21.32	21.23	21.18	18.29	18.23	18.19
20	16QAM	50	24	21.28	21.21	21.21	18.31	18.26	18.23
20	16QAM	50	50	21.26	21.18	21.17	18.27	18.19	18.18
20	16QAM	100	0	21.29	21.19	21.15	18.29	18.20	18.17
20	64QAM	1	0	21.38	21.37	21.30	18.38	18.31	18.23
20	64QAM	1	49	21.34	21.25	21.25	18.33	18.24	18.30
20	64QAM	1	99	21.33	21.40	21.38	18.35	18.35	18.32
20	64QAM	50	0	21.30	21.21	21.20	18.27	18.19	18.17
20	64QAM	50	24	21.33	21.25	21.23	18.31	18.19	18.19
20	64QAM	50	50	21.27	21.17	21.19	18.27	18.16	18.16
20	64QAM	100	0	21.29	21.18	21.20	18.26	18.16	18.18
Channel				18675	18900	19125	18675	18900	19125
Frequency (MHz)				1857.5	1880	1902.5	1857.5	1880	1902.5
15	QPSK	1	0	21.43	21.47	21.30	18.59	18.52	18.35
15	QPSK	1	37	21.34	21.25	21.26	18.57	18.38	18.49
15	QPSK	1	74	21.22	21.24	21.31	18.53	18.51	18.46
15	QPSK	36	0	21.33	21.50	21.38	18.55	18.50	18.55
15	QPSK	36	20	21.42	21.25	21.29	18.53	18.56	18.50
15	QPSK	36	39	21.45	21.21	21.31	18.57	18.48	18.51
15	QPSK	75	0	21.40	21.20	21.30	18.49	18.58	18.54
15	16QAM	1	0	21.28	21.16	21.09	18.45	18.56	18.43
15	16QAM	1	37	21.24	21.08	21.17	18.43	18.32	18.39
15	16QAM	1	74	21.36	21.23	21.32	18.37	18.37	18.46
15	16QAM	36	0	21.15	21.00	21.06	18.25	18.17	18.18
15	16QAM	36	20	21.06	21.01	21.10	18.37	18.19	18.29
15	16QAM	36	39	21.16	20.91	21.00	18.21	18.19	18.10
15	16QAM	75	0	20.99	21.08	21.01	18.23	18.10	18.18
15	64QAM	1	0	21.14	21.25	21.11	18.45	18.26	18.26
15	64QAM	1	37	21.04	21.15	21.14	18.43	18.30	18.24
15	64QAM	1	74	21.18	21.25	21.22	18.38	18.41	18.23
15	64QAM	36	0	21.07	20.93	20.90	18.30	18.13	18.10
15	64QAM	36	20	21.23	21.08	21.06	18.34	18.28	18.27
15	64QAM	36	39	20.99	20.95	21.09	18.31	18.25	18.26
15	64QAM	75	0	21.13	20.89	20.99	18.31	18.11	18.17
Channel				18650	18900	19150	18650	18900	19150
Frequency (MHz)				1855	1880	1905	1855	1880	1905
10	QPSK	1	0	21.38	21.38	21.16	18.53	18.58	18.54
10	QPSK	1	25	21.39	21.28	21.30	18.47	18.41	18.37
10	QPSK	1	49	21.32	21.40	21.40	18.48	18.61	18.59
10	QPSK	25	0	21.30	21.33	21.29	18.55	18.53	18.40
10	QPSK	25	12	21.42	21.26	21.40	18.60	18.48	18.54
10	QPSK	25	25	21.27	21.23	21.36	18.51	18.59	18.39
10	QPSK	50	0	21.48	21.26	21.36	18.60	18.54	18.53
10	16QAM	1	0	21.31	21.19	21.19	18.50	18.57	18.29
10	16QAM	1	25	21.32	21.16	21.11	18.46	18.48	18.30
10	16QAM	1	49	21.27	21.10	21.30	18.43	18.43	18.52
10	16QAM	25	0	21.15	21.06	21.01	18.19	18.22	18.11
10	16QAM	25	12	21.03	21.09	20.91	18.37	18.22	18.22
10	16QAM	25	25	21.00	21.02	20.87	18.35	18.17	18.15
10	16QAM	50	0	21.06	20.99	20.90	18.27	18.11	18.16
10	64QAM	1	0	21.25	21.19	21.17	18.42	18.27	18.21
10	64QAM	1	25	21.06	21.02	21.10	18.31	18.28	18.21
10	64QAM	1	49	21.06	21.21	21.14	18.32	18.42	18.33
10	64QAM	25	0	21.12	20.91	20.98	18.37	18.22	18.16
10	64QAM	25	12	21.08	21.04	21.07	18.21	18.14	18.13



FCC SAR TEST REPORT

Report No. : FA891148-06

10	64QAM	25	25	21.13	20.91	21.08	18.30	18.17	18.06
10	64QAM	50	0	21.01	20.94	21.04	18.25	18.21	18.11
Channel				18625	18900	19175	18625	18900	19175
Frequency (MHz)				1852.5	1880	1907.5	1852.5	1880	1907.5
5	QPSK	1	0	21.43	21.40	21.13	18.45	18.53	18.42
5	QPSK	1	12	21.42	21.23	21.16	18.48	18.50	18.46
5	QPSK	1	24	21.22	21.36	21.27	18.58	18.58	18.61
5	QPSK	12	0	21.47	21.44	21.35	18.51	18.60	18.45
5	QPSK	12	7	21.43	21.43	21.24	18.58	18.46	18.43
5	QPSK	12	13	21.34	21.20	21.28	18.47	18.40	18.50
5	QPSK	25	0	21.36	21.26	21.33	18.58	18.55	18.58
5	16QAM	1	0	21.31	21.12	21.24	18.49	18.54	18.28
5	16QAM	1	12	21.35	21.15	21.20	18.52	18.34	18.36
5	16QAM	1	24	21.31	21.26	21.26	18.47	18.46	18.39
5	16QAM	12	0	21.16	20.98	21.06	18.32	18.18	18.25
5	16QAM	12	7	21.12	21.01	20.92	18.40	18.29	18.17
5	16QAM	12	13	20.98	21.05	21.07	18.21	18.21	18.08
5	16QAM	25	0	21.17	21.04	20.94	18.35	18.25	18.20
5	64QAM	1	0	21.23	21.07	21.13	18.45	18.29	18.32
5	64QAM	1	12	21.15	20.97	21.01	18.26	18.31	18.28
5	64QAM	1	24	21.09	21.25	21.08	18.38	18.37	18.42
5	64QAM	12	0	21.00	21.05	21.08	18.21	18.12	18.25
5	64QAM	12	7	21.17	21.01	20.94	18.23	18.28	18.22
5	64QAM	12	13	21.09	21.03	21.05	18.31	18.10	18.25
5	64QAM	25	0	21.19	20.95	20.98	18.26	18.17	18.21
Channel				18615	18900	19185	18615	18900	19185
Frequency (MHz)				1851.5	1880	1908.5	1851.5	1880	1908.5
3	QPSK	1	0	21.50	21.40	21.14	18.58	18.51	18.48
3	QPSK	1	8	21.38	21.18	21.12	18.51	18.51	18.39
3	QPSK	1	14	21.32	21.33	21.34	18.57	18.45	18.60
3	QPSK	8	0	21.39	21.42	21.37	18.42	18.58	18.57
3	QPSK	8	4	21.46	21.32	21.35	18.48	18.55	18.47
3	QPSK	8	7	21.27	21.22	21.20	18.47	18.44	18.56
3	QPSK	15	0	21.35	21.28	21.34	18.52	18.51	18.49
3	16QAM	1	0	21.30	21.24	21.24	18.37	18.47	18.42
3	16QAM	1	8	21.17	21.17	21.24	18.38	18.29	18.27
3	16QAM	1	14	21.25	21.15	21.18	18.53	18.53	18.39
3	16QAM	8	0	21.08	21.00	20.95	18.25	18.20	18.13
3	16QAM	8	4	21.02	21.04	20.94	18.36	18.21	18.13
3	16QAM	8	7	21.12	21.07	20.96	18.37	18.19	18.24
3	16QAM	15	0	21.17	21.09	20.97	18.38	18.26	18.23
3	64QAM	1	0	21.15	21.08	21.18	18.29	18.39	18.29
3	64QAM	1	8	21.12	21.08	21.05	18.37	18.30	18.29
3	64QAM	1	14	21.03	21.20	21.13	18.34	18.32	18.29
3	64QAM	8	0	21.11	21.06	20.95	18.36	18.28	18.20
3	64QAM	8	4	21.15	21.11	21.04	18.31	18.18	18.14
3	64QAM	8	7	21.09	21.02	20.96	18.20	18.09	18.18
3	64QAM	15	0	21.03	20.99	21.07	18.27	18.17	18.24
Channel				18607	18900	19193	18607	18900	19193
Frequency (MHz)				1850.7	1880	1909.3	1850.7	1880	1909.3
1.4	QPSK	1	0	21.31	21.22	21.24	18.59	18.59	18.42
1.4	QPSK	1	3	21.36	21.28	21.32	18.57	18.51	18.38
1.4	QPSK	1	5	21.27	21.22	21.23	18.60	18.52	18.41
1.4	QPSK	3	0	21.33	21.25	21.29	18.54	18.56	18.44
1.4	QPSK	3	1	21.38	21.28	21.32	18.54	18.45	18.60
1.4	QPSK	3	3	21.34	21.22	21.29	18.54	18.41	18.43
1.4	QPSK	6	0	21.33	21.25	21.30	18.47	18.51	18.38
1.4	16QAM	1	0	21.64	21.57	21.57	18.36	18.43	18.37
1.4	16QAM	1	3	21.72	21.63	21.71	18.44	18.32	18.37
1.4	16QAM	1	5	21.63	21.55	21.56	18.42	18.47	18.41
1.4	16QAM	3	0	21.43	21.31	21.39	18.23	18.23	18.24
1.4	16QAM	3	1	21.50	21.36	21.40	18.37	18.28	18.20
1.4	16QAM	3	3	21.42	21.32	21.36	18.21	18.27	18.09
1.4	16QAM	6	0	21.51	21.38	21.47	18.22	18.17	18.08
1.4	64QAM	1	0	21.56	21.42	21.49	18.34	18.40	18.33
1.4	64QAM	1	3	21.60	21.51	21.53	18.42	18.26	18.20
1.4	64QAM	1	5	21.53	21.45	21.47	18.45	18.30	18.39
1.4	64QAM	3	0	21.52	21.43	21.50	18.18	18.20	18.26
1.4	64QAM	3	1	21.59	21.49	21.55	18.35	18.28	18.16
1.4	64QAM	3	3	21.56	21.43	21.48	18.29	18.17	18.10
1.4	64QAM	6	0	21.42	21.34	21.40	18.17	18.08	18.17



<LTE Band 4>

<WiFi off>

Power Selection				Head			Hotspot / Body-worn		
Transmit Antenna				Ant 0			Ant 0 / Ant 1		
Max. Power				24.5			24.5		
BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.
Channel				20050	20175	20300	20050	20175	20300
Frequency (MHz)				1720	1732.5	1745	1720	1732.5	1745
20	QPSK	1	0	23.42	23.28	23.23	23.42	23.28	23.23
20	QPSK	1	49	23.34	23.21	23.28	23.34	23.21	23.28
20	QPSK	1	99	23.20	23.17	23.20	23.20	23.17	23.20
20	QPSK	50	0	22.43	22.28	22.25	22.43	22.29	22.29
20	QPSK	50	24	22.32	22.29	22.24	22.32	22.28	22.25
20	QPSK	50	50	22.29	22.20	22.29	22.29	22.20	22.24
20	QPSK	100	0	22.32	22.26	22.21	22.32	22.26	22.21
20	16QAM	1	0	22.74	22.58	22.57	22.74	22.58	22.57
20	16QAM	1	49	22.63	22.54	22.62	22.63	22.54	22.62
20	16QAM	1	99	22.46	22.49	22.54	22.46	22.49	22.54
20	16QAM	50	0	21.50	21.35	21.34	21.50	21.35	21.34
20	16QAM	50	24	21.43	21.36	21.31	21.43	21.36	21.31
20	16QAM	50	50	21.37	21.30	21.39	21.37	21.30	21.39
20	16QAM	100	0	21.39	21.31	21.30	21.39	21.31	21.30
20	64QAM	1	0	21.63	21.49	21.50	21.63	21.49	21.50
20	64QAM	1	49	21.58	21.47	21.56	21.58	21.47	21.56
20	64QAM	1	99	21.42	21.44	21.46	21.42	21.44	21.46
20	64QAM	50	0	20.53	20.36	20.34	20.53	20.36	20.34
20	64QAM	50	24	20.42	20.35	20.35	20.42	20.35	20.35
20	64QAM	50	50	20.38	20.33	20.38	20.38	20.33	20.38
20	64QAM	100	0	20.41	20.35	20.32	20.41	20.35	20.32
Channel				20025	20175	20325	20025	20175	20325
Frequency (MHz)				1717.5	1732.5	1747.5	1717.5	1732.5	1747.5
15	QPSK	1	0	23.18	23.00	22.96	23.18	23.00	22.96
15	QPSK	1	37	23.12	22.99	23.18	23.12	22.99	23.18
15	QPSK	1	74	22.93	22.95	23.07	22.93	22.95	23.07
15	QPSK	36	0	22.31	22.12	22.13	22.31	22.12	22.13
15	QPSK	36	20	22.03	22.12	22.00	22.03	22.12	22.00
15	QPSK	36	39	22.12	22.00	22.07	22.12	22.00	22.07
15	QPSK	75	0	22.02	22.03	22.05	22.02	22.03	22.05
15	16QAM	1	0	22.56	22.30	22.29	22.56	22.30	22.29
15	16QAM	1	37	22.43	22.31	22.33	22.43	22.31	22.33
15	16QAM	1	74	22.31	22.38	22.33	22.31	22.38	22.33
15	16QAM	36	0	21.27	21.05	21.24	21.27	21.05	21.24
15	16QAM	36	20	21.14	21.21	21.18	21.14	21.21	21.18
15	16QAM	36	39	21.08	21.15	21.24	21.08	21.15	21.24
15	16QAM	75	0	21.12	21.08	21.11	21.12	21.08	21.11
15	64QAM	1	0	21.48	21.39	21.36	21.48	21.39	21.36
15	64QAM	1	37	21.40	21.26	21.30	21.40	21.26	21.30
15	64QAM	1	74	21.31	21.27	21.30	21.31	21.27	21.30
15	64QAM	36	0	20.26	20.18	20.05	20.26	20.18	20.05
15	64QAM	36	20	20.26	20.07	20.21	20.26	20.07	20.21
15	64QAM	36	39	20.19	20.08	20.25	20.19	20.08	20.25
15	64QAM	75	0	20.22	20.10	20.10	20.22	20.10	20.10
Channel				20000	20175	20350	20000	20175	20350
Frequency (MHz)				1715	1732.5	1750	1715	1732.5	1750
10	QPSK	1	0	23.31	23.01	23.02	23.31	23.01	23.02
10	QPSK	1	25	23.22	23.05	22.99	23.22	23.05	22.99
10	QPSK	1	49	23.09	22.98	23.02	23.09	22.98	23.02
10	QPSK	25	0	22.29	22.16	21.96	22.29	22.16	21.96
10	QPSK	25	12	22.11	22.15	21.99	22.11	22.15	21.99
10	QPSK	25	25	22.02	21.93	22.00	22.02	21.93	22.00
10	QPSK	50	0	22.03	22.03	22.11	22.03	22.03	22.11
10	16QAM	1	0	22.56	22.41	22.29	22.56	22.41	22.29
10	16QAM	1	25	22.39	22.32	22.37	22.39	22.32	22.37
10	16QAM	1	49	22.29	22.26	22.26	22.29	22.26	22.26
10	16QAM	25	0	21.36	21.09	21.08	21.36	21.09	21.08
10	16QAM	25	12	21.21	21.08	21.10	21.21	21.08	21.10
10	16QAM	25	25	21.17	21.07	21.11	21.17	21.07	21.11
10	16QAM	50	0	21.18	21.01	21.18	21.18	21.01	21.18
10	64QAM	1	0	21.34	21.29	21.33	21.34	21.29	21.33
10	64QAM	1	25	21.42	21.36	21.34	21.42	21.36	21.34
10	64QAM	1	49	21.17	21.31	21.26	21.17	21.31	21.26



FCC SAR TEST REPORT

Report No. : FA891148-06

10	64QAM	25	0	20.25	20.08	20.04	20.25	20.08	20.04
10	64QAM	25	12	20.14	20.15	20.23	20.14	20.15	20.23
10	64QAM	25	25	20.26	20.14	20.08	20.26	20.14	20.08
10	64QAM	50	0	20.17	20.22	20.10	20.17	20.22	20.10
Channel				19975	20175	20375	19975	20175	20375
Frequency (MHz)				1712.5	1732.5	1752.5	1712.5	1732.5	1752.5
5	QPSK	1	0	23.13	23.08	23.12	23.13	23.08	23.12
5	QPSK	1	12	23.20	22.98	23.13	23.20	22.98	23.13
5	QPSK	1	24	22.91	22.96	22.92	22.91	22.96	22.92
5	QPSK	12	0	22.27	22.11	22.11	22.27	22.11	22.11
5	QPSK	12	7	22.05	22.18	22.06	22.05	22.18	22.06
5	QPSK	12	13	22.18	22.06	22.03	22.18	22.06	22.03
5	QPSK	25	0	22.03	22.00	22.04	22.03	22.00	22.04
5	16QAM	1	0	22.63	22.31	22.45	22.63	22.31	22.45
5	16QAM	1	12	22.44	22.35	22.44	22.44	22.35	22.44
5	16QAM	1	24	22.29	22.27	22.35	22.29	22.27	22.35
5	16QAM	12	0	21.20	21.09	21.09	21.20	21.09	21.09
5	16QAM	12	7	21.27	21.26	21.21	21.27	21.26	21.21
5	16QAM	12	13	21.09	21.14	21.24	21.09	21.14	21.24
5	16QAM	25	0	21.25	21.21	21.04	21.25	21.21	21.04
5	64QAM	1	0	21.40	21.33	21.30	21.40	21.33	21.30
5	64QAM	1	12	21.44	21.27	21.45	21.44	21.27	21.45
5	64QAM	1	24	21.29	21.28	21.27	21.29	21.28	21.27
5	64QAM	12	0	20.28	20.10	20.08	20.28	20.10	20.08
5	64QAM	12	7	20.24	20.14	20.15	20.24	20.14	20.15
5	64QAM	12	13	20.24	20.15	20.10	20.24	20.15	20.10
5	64QAM	25	0	20.17	20.10	20.16	20.17	20.10	20.16
Channel				19965	20175	20385	19965	20175	20385
Frequency (MHz)				1711.5	1732.5	1753.5	1711.5	1732.5	1753.5
3	QPSK	1	0	23.21	23.03	22.93	23.21	23.03	22.93
3	QPSK	1	8	23.05	22.99	23.04	23.05	22.99	23.04
3	QPSK	1	14	22.95	22.94	23.05	22.95	22.94	23.05
3	QPSK	8	0	22.13	22.17	22.01	22.13	22.17	22.01
3	QPSK	8	4	22.13	22.06	21.98	22.13	22.06	21.98
3	QPSK	8	7	22.06	22.01	22.03	22.06	22.01	22.03
3	QPSK	15	0	22.21	22.14	22.01	22.21	22.14	22.01
3	16QAM	1	0	22.46	22.42	22.40	22.46	22.42	22.40
3	16QAM	1	8	22.51	22.38	22.52	22.51	22.38	22.52
3	16QAM	1	14	22.16	22.39	22.29	22.16	22.39	22.29
3	16QAM	8	0	21.37	21.08	21.18	21.37	21.08	21.18
3	16QAM	8	4	21.26	21.06	21.19	21.26	21.06	21.19
3	16QAM	8	7	21.12	21.18	21.27	21.12	21.18	21.27
3	16QAM	15	0	21.23	21.15	21.14	21.23	21.15	21.14
3	64QAM	1	0	21.38	21.38	21.26	21.38	21.38	21.26
3	64QAM	1	8	21.39	21.36	21.42	21.39	21.36	21.42
3	64QAM	1	14	21.15	21.25	21.35	21.15	21.25	21.35
3	64QAM	8	0	20.23	20.26	20.06	20.23	20.26	20.06
3	64QAM	8	4	20.31	20.10	20.06	20.31	20.10	20.06
3	64QAM	8	7	20.24	20.15	20.13	20.24	20.15	20.13
3	64QAM	15	0	20.28	20.08	20.12	20.28	20.08	20.12
Channel				19957	20175	20393	19957	20175	20393
Frequency (MHz)				1710.7	1732.5	1754.3	1710.7	1732.5	1754.3
1.4	QPSK	1	0	23.33	23.16	23.19	23.33	23.16	23.19
1.4	QPSK	1	3	23.41	23.22	23.27	23.41	23.22	23.27
1.4	QPSK	1	5	23.30	23.15	23.16	23.30	23.15	23.16
1.4	QPSK	3	0	23.38	23.18	23.26	23.38	23.18	23.26
1.4	QPSK	3	1	23.40	23.24	23.27	23.40	23.24	23.27
1.4	QPSK	3	3	23.35	23.21	23.23	23.35	23.21	23.23
1.4	QPSK	6	0	22.35	22.20	22.22	22.35	22.20	22.22
1.4	16QAM	1	0	22.69	22.44	22.51	22.69	22.44	22.51
1.4	16QAM	1	3	22.73	22.55	22.59	22.73	22.55	22.59
1.4	16QAM	1	5	22.64	22.50	22.46	22.64	22.50	22.46
1.4	16QAM	3	0	22.44	22.26	22.33	22.44	22.26	22.33
1.4	16QAM	3	1	22.53	22.31	22.37	22.53	22.31	22.37
1.4	16QAM	3	3	22.47	22.28	22.30	22.47	22.28	22.30
1.4	16QAM	6	0	21.52	21.32	21.39	21.52	21.32	21.39
1.4	64QAM	1	0	21.58	21.36	21.40	21.58	21.36	21.40
1.4	64QAM	1	3	21.61	21.46	21.43	21.61	21.46	21.43
1.4	64QAM	1	5	21.56	21.35	21.40	21.56	21.35	21.40
1.4	64QAM	3	0	21.56	21.37	21.42	21.56	21.37	21.42
1.4	64QAM	3	1	21.62	21.43	21.50	21.62	21.43	21.50
1.4	64QAM	3	3	21.54	21.36	21.44	21.54	21.36	21.44
1.4	64QAM	6	0	20.43	20.27	20.32	20.43	20.27	20.32



<WiFi on>

Power Selection				Head			Hotspot / Body-worn		
Transmit Antenna				Ant 0			Ant 0		
Max. Power				24.5			19.2		
BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.
Channel				20050	20175	20300	20050	20175	20300
Frequency (MHz)				1720	1732.5	1745	1720	1732.5	1745
20	QPSK	1	0	23.42	23.28	23.23	17.97	18.12	17.95
20	QPSK	1	49	23.34	23.21	23.28	18.06	17.91	17.96
20	QPSK	1	99	23.20	23.17	23.20	17.92	17.85	17.90
20	QPSK	50	0	22.43	22.29	22.29	17.99	18.08	17.97
20	QPSK	50	24	22.32	22.28	22.25	18.04	17.97	17.95
20	QPSK	50	50	22.29	22.20	22.24	17.98	17.93	18.01
20	QPSK	100	0	22.32	22.26	22.21	17.94	18.00	17.95
20	16QAM	1	0	22.74	22.58	22.57	18.00	17.91	17.88
20	16QAM	1	49	22.63	22.54	22.62	17.99	17.85	17.94
20	16QAM	1	99	22.46	22.49	22.54	17.84	17.82	17.86
20	16QAM	50	0	21.50	21.35	21.34	17.81	17.67	17.64
20	16QAM	50	24	21.43	21.36	21.31	17.75	17.66	17.65
20	16QAM	50	50	21.37	21.30	21.39	17.68	17.63	17.73
20	16QAM	100	0	21.39	21.31	21.30	17.67	17.63	17.63
20	64QAM	1	0	21.63	21.49	21.50	17.95	17.77	17.82
20	64QAM	1	49	21.58	21.47	21.56	17.92	17.64	17.85
20	64QAM	1	99	21.42	21.44	21.46	17.70	17.66	17.80
20	64QAM	50	0	20.53	20.36	20.34	17.82	17.66	17.63
20	64QAM	50	24	20.42	20.35	20.35	17.71	17.64	17.64
20	64QAM	50	50	20.38	20.33	20.38	17.67	17.60	17.69
20	64QAM	100	0	20.41	20.35	20.32	17.67	17.64	17.60
Channel				20025	20175	20325	20025	20175	20325
Frequency (MHz)				1717.5	1732.5	1747.5	1717.5	1732.5	1747.5
15	QPSK	1	0	23.18	23.00	22.96	17.75	17.98	17.75
15	QPSK	1	37	23.12	22.99	23.18	17.92	17.69	17.72
15	QPSK	1	74	22.93	22.95	23.07	17.78	17.60	17.72
15	QPSK	36	0	22.31	22.12	22.13	17.78	17.86	17.83
15	QPSK	36	20	22.03	22.12	22.00	17.94	17.79	17.82
15	QPSK	36	39	22.12	22.00	22.07	17.79	17.77	17.87
15	QPSK	75	0	22.02	22.03	22.05	17.72	17.73	17.66
15	16QAM	1	0	22.56	22.30	22.29	17.72	17.67	17.75
15	16QAM	1	37	22.43	22.31	22.33	17.87	17.68	17.72
15	16QAM	1	74	22.31	22.38	22.33	17.73	17.68	17.63
15	16QAM	36	0	21.27	21.05	21.24	17.61	17.37	17.37
15	16QAM	36	20	21.14	21.21	21.18	17.52	17.46	17.43
15	16QAM	36	39	21.08	21.15	21.24	17.47	17.36	17.51
15	16QAM	75	0	21.12	21.08	21.11	17.48	17.34	17.39
15	64QAM	1	0	21.48	21.39	21.36	17.70	17.57	17.66
15	64QAM	1	37	21.40	21.26	21.30	17.76	17.38	17.58
15	64QAM	1	74	21.31	21.27	21.30	17.57	17.36	17.68
15	64QAM	36	0	20.26	20.18	20.05	17.67	17.44	17.50
15	64QAM	36	20	20.26	20.07	20.21	17.61	17.44	17.54
15	64QAM	36	39	20.19	20.08	20.25	17.39	17.41	17.54
15	64QAM	75	0	20.22	20.10	20.10	17.49	17.45	17.39
Channel				20000	20175	20350	20000	20175	20350
Frequency (MHz)				1715	1732.5	1750	1715	1732.5	1750
10	QPSK	1	0	23.31	23.01	23.02	17.69	17.85	17.67
10	QPSK	1	25	23.22	23.05	22.99	17.93	17.80	17.66
10	QPSK	1	49	23.09	22.98	23.02	17.71	17.69	17.62
10	QPSK	25	0	22.29	22.16	21.96	17.79	17.99	17.79
10	QPSK	25	12	22.11	22.15	21.99	17.81	17.72	17.84
10	QPSK	25	25	22.02	21.93	22.00	17.88	17.66	17.90
10	QPSK	50	0	22.03	22.03	22.11	17.67	17.88	17.84
10	16QAM	1	0	22.56	22.41	22.29	17.87	17.68	17.62
10	16QAM	1	25	22.39	22.32	22.37	17.78	17.58	17.81
10	16QAM	1	49	22.29	22.26	22.26	17.74	17.66	17.66
10	16QAM	25	0	21.36	21.09	21.08	17.69	17.43	17.46
10	16QAM	25	12	21.21	21.08	21.10	17.50	17.41	17.37
10	16QAM	25	25	21.17	21.07	21.11	17.45	17.49	17.62
10	16QAM	50	0	21.18	21.01	21.18	17.43	17.49	17.52
10	64QAM	1	0	21.34	21.29	21.33	17.76	17.62	17.71
10	64QAM	1	25	21.42	21.36	21.34	17.65	17.51	17.56
10	64QAM	1	49	21.17	21.31	21.26	17.49	17.38	17.56
10	64QAM	25	0	20.25	20.08	20.04	17.57	17.53	17.46
10	64QAM	25	12	20.14	20.15	20.23	17.51	17.52	17.45



FCC SAR TEST REPORT

Report No. : FA891148-06

10	64QAM	25	25	20.26	20.14	20.08	17.41	17.30	17.53
10	64QAM	50	0	20.17	20.22	20.10	17.54	17.54	17.42
Channel				19975	20175	20375	19975	20175	20375
Frequency (MHz)				1712.5	1732.5	1752.5	1712.5	1732.5	1752.5
5	QPSK	1	0	23.13	23.08	23.12	17.77	17.81	17.77
5	QPSK	1	12	23.20	22.98	23.13	17.76	17.65	17.82
5	QPSK	1	24	22.91	22.96	22.92	17.78	17.62	17.80
5	QPSK	12	0	22.27	22.11	22.11	17.72	17.89	17.76
5	QPSK	12	7	22.05	22.18	22.06	17.91	17.68	17.66
5	QPSK	12	13	22.18	22.06	22.03	17.88	17.76	17.79
5	QPSK	25	0	22.03	22.00	22.04	17.64	17.85	17.77
5	16QAM	1	0	22.63	22.31	22.45	17.74	17.76	17.61
5	16QAM	1	12	22.44	22.35	22.44	17.85	17.60	17.79
5	16QAM	1	24	22.29	22.27	22.35	17.72	17.68	17.67
5	16QAM	12	0	21.20	21.09	21.09	17.54	17.41	17.39
5	16QAM	12	7	21.27	21.26	21.21	17.62	17.44	17.41
5	16QAM	12	13	21.09	21.14	21.24	17.51	17.41	17.60
5	16QAM	25	0	21.25	21.21	21.04	17.46	17.36	17.46
5	64QAM	1	0	21.40	21.33	21.30	17.74	17.65	17.65
5	64QAM	1	12	21.44	21.27	21.45	17.79	17.45	17.61
5	64QAM	1	24	21.29	21.28	21.27	17.56	17.48	17.65
5	64QAM	12	0	20.28	20.10	20.08	17.70	17.54	17.39
5	64QAM	12	7	20.24	20.14	20.15	17.51	17.40	17.51
5	64QAM	12	13	20.24	20.15	20.10	17.53	17.43	17.42
5	64QAM	25	0	20.17	20.10	20.16	17.40	17.34	17.30
Channel				19965	20175	20385	19965	20175	20385
Frequency (MHz)				1711.5	1732.5	1753.5	1711.5	1732.5	1753.5
3	QPSK	1	0	23.21	23.03	22.93	17.75	17.95	17.75
3	QPSK	1	8	23.05	22.99	23.04	17.82	17.81	17.67
3	QPSK	1	14	22.95	22.94	23.05	17.65	17.56	17.63
3	QPSK	8	0	22.13	22.17	22.01	17.73	17.95	17.87
3	QPSK	8	4	22.13	22.06	21.98	17.74	17.83	17.72
3	QPSK	8	7	22.06	22.01	22.03	17.68	17.68	17.74
3	QPSK	15	0	22.21	22.14	22.01	17.65	17.77	17.68
3	16QAM	1	0	22.46	22.42	22.40	17.76	17.62	17.72
3	16QAM	1	8	22.51	22.38	22.52	17.70	17.74	17.82
3	16QAM	1	14	22.16	22.39	22.29	17.65	17.60	17.60
3	16QAM	8	0	21.37	21.08	21.18	17.62	17.40	17.35
3	16QAM	8	4	21.26	21.06	21.19	17.47	17.47	17.40
3	16QAM	8	7	21.12	21.18	21.27	17.40	17.36	17.45
3	16QAM	15	0	21.23	21.15	21.14	17.56	17.50	17.38
3	64QAM	1	0	21.38	21.38	21.26	17.71	17.57	17.63
3	64QAM	1	8	21.39	21.36	21.42	17.62	17.45	17.55
3	64QAM	1	14	21.15	21.25	21.35	17.47	17.49	17.59
3	64QAM	8	0	20.23	20.26	20.06	17.65	17.36	17.47
3	64QAM	8	4	20.31	20.10	20.06	17.58	17.42	17.46
3	64QAM	8	7	20.24	20.15	20.13	17.48	17.40	17.42
3	64QAM	15	0	20.28	20.08	20.12	17.42	17.39	17.30
Channel				19957	20175	20393	19957	20175	20393
Frequency (MHz)				1710.7	1732.5	1754.3	1710.7	1732.5	1754.3
1.4	QPSK	1	0	23.33	23.16	23.19	17.69	17.98	17.65
1.4	QPSK	1	3	23.41	23.22	23.27	17.77	17.71	17.82
1.4	QPSK	1	5	23.30	23.15	23.16	17.76	17.60	17.69
1.4	QPSK	3	0	23.38	23.18	23.26	17.88	17.86	17.67
1.4	QPSK	3	1	23.40	23.24	23.27	17.83	17.79	17.70
1.4	QPSK	3	3	23.35	23.21	23.23	17.74	17.77	17.71
1.4	QPSK	6	0	22.35	22.20	22.22	17.66	17.78	17.83
1.4	16QAM	1	0	22.69	22.44	22.51	17.79	17.72	17.61
1.4	16QAM	1	3	22.73	22.55	22.59	17.74	17.70	17.71
1.4	16QAM	1	5	22.64	22.50	22.46	17.72	17.53	17.75
1.4	16QAM	3	0	22.44	22.26	22.33	17.66	17.54	17.41
1.4	16QAM	3	1	22.53	22.31	22.37	17.60	17.56	17.47
1.4	16QAM	3	3	22.47	22.28	22.30	17.41	17.46	17.57
1.4	16QAM	6	0	21.52	21.32	21.39	17.48	17.45	17.44
1.4	64QAM	1	0	21.58	21.36	21.40	17.79	17.66	17.72
1.4	64QAM	1	3	21.61	21.46	21.43	17.80	17.40	17.57
1.4	64QAM	1	5	21.56	21.35	21.40	17.50	17.47	17.61
1.4	64QAM	3	0	21.56	21.37	21.42	17.64	17.56	17.40
1.4	64QAM	3	1	21.62	21.43	21.50	17.43	17.34	17.51
1.4	64QAM	3	3	21.54	21.36	21.44	17.46	17.42	17.40
1.4	64QAM	6	0	20.43	20.27	20.32	17.40	17.45	17.31



<LTE Band 5>

SAR for LTE B5 is covered by LTE B26 due to overlapping frequency range, less or same maximum tune-up limit and the same channel bandwidth

<LTE Band 12>

<WiFi off>

Power Selection				Head			Hotspot / Body-worn		
Transmit Antenna				Ant 0			Ant 0 / Ant 1		
Max. Power				25.7			25.7		
BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.
Channel				23060	23095	23130	23060	23095	23130
Frequency (MHz)				704	707.5	711	704	707.5	711
10	QPSK	1	0	24.53	24.67	24.66	24.53	24.67	24.66
10	QPSK	1	25	24.65	24.66	24.65	24.65	24.66	24.65
10	QPSK	1	49	24.63	24.60	24.65	24.63	24.60	24.65
10	QPSK	25	0	23.69	23.79	23.68	23.69	23.79	23.68
10	QPSK	25	12	23.78	23.76	23.70	23.78	23.76	23.70
10	QPSK	25	25	23.77	23.73	23.67	23.77	23.73	23.67
10	QPSK	50	0	23.79	23.80	23.73	23.79	23.80	23.73
10	16QAM	1	0	23.87	23.90	23.97	23.87	23.90	23.97
10	16QAM	1	25	23.96	24.01	24.02	23.96	24.01	24.02
10	16QAM	1	49	24.05	24.02	24.09	24.05	24.02	24.09
10	16QAM	25	0	22.78	22.83	22.78	22.78	22.83	22.78
10	16QAM	25	12	22.89	22.86	22.81	22.89	22.86	22.81
10	16QAM	25	25	22.86	22.81	22.79	22.86	22.81	22.79
10	16QAM	50	0	22.86	22.82	22.79	22.86	22.82	22.79
10	64QAM	1	0	22.75	22.81	22.86	22.75	22.81	22.86
10	64QAM	1	25	22.86	22.88	22.87	22.86	22.88	22.87
10	64QAM	1	49	22.93	22.89	23.02	22.93	22.89	23.02
10	64QAM	25	0	21.78	21.85	21.82	21.78	21.85	21.82
10	64QAM	25	12	21.91	21.86	21.81	21.91	21.86	21.81
10	64QAM	25	25	21.86	21.82	21.78	21.86	21.82	21.78
10	64QAM	50	0	21.86	21.83	21.80	21.86	21.83	21.80
Channel				23035	23095	23155	23035	23095	23155
Frequency (MHz)				701.5	707.5	713.5	701.5	707.5	713.5
5	QPSK	1	0	24.36	24.54	24.52	24.36	24.54	24.52
5	QPSK	1	12	24.49	24.37	24.38	24.49	24.37	24.38
5	QPSK	1	24	24.46	24.38	24.40	24.46	24.38	24.40
5	QPSK	12	0	23.50	23.67	23.42	23.50	23.67	23.42
5	QPSK	12	7	23.62	23.64	23.42	23.62	23.64	23.42
5	QPSK	12	13	23.53	23.54	23.50	23.53	23.54	23.50
5	QPSK	25	0	23.56	23.51	23.53	23.56	23.51	23.53
5	16QAM	1	0	23.62	23.70	23.76	23.62	23.70	23.76
5	16QAM	1	12	23.68	23.71	23.73	23.68	23.71	23.73
5	16QAM	1	24	23.78	23.75	23.94	23.78	23.75	23.94
5	16QAM	12	0	22.62	22.70	22.58	22.62	22.70	22.58
5	16QAM	12	7	22.61	22.72	22.71	22.61	22.72	22.71
5	16QAM	12	13	22.70	22.52	22.64	22.70	22.52	22.64
5	16QAM	25	0	22.72	22.72	22.55	22.72	22.72	22.55
5	64QAM	1	0	22.45	22.71	22.70	22.45	22.71	22.70
5	64QAM	1	12	22.71	22.66	22.77	22.71	22.66	22.77
5	64QAM	1	24	22.79	22.64	22.77	22.79	22.64	22.77
5	64QAM	12	0	21.56	21.66	21.55	21.56	21.66	21.55
5	64QAM	12	7	21.80	21.58	21.68	21.80	21.58	21.68
5	64QAM	12	13	21.59	21.72	21.57	21.59	21.72	21.57
5	64QAM	25	0	21.60	21.66	21.56	21.60	21.66	21.56
Channel				23025	23095	23165	23025	23095	23165
Frequency (MHz)				700.5	707.5	714.5	700.5	707.5	714.5
3	QPSK	1	0	24.39	24.46	24.40	24.39	24.46	24.40
3	QPSK	1	8	24.46	24.48	24.46	24.46	24.48	24.46
3	QPSK	1	14	24.52	24.36	24.53	24.52	24.36	24.53
3	QPSK	8	0	23.39	23.50	23.53	23.39	23.50	23.53
3	QPSK	8	4	23.51	23.55	23.51	23.51	23.55	23.51
3	QPSK	8	7	23.63	23.63	23.45	23.63	23.63	23.45
3	QPSK	15	0	23.64	23.60	23.56	23.64	23.60	23.56
3	16QAM	1	0	23.70	23.75	23.87	23.70	23.75	23.87
3	16QAM	1	8	23.76	23.71	23.86	23.76	23.71	23.86
3	16QAM	1	14	23.87	23.79	23.96	23.87	23.79	23.96



FCC SAR TEST REPORT

Report No. : FA891148-06

3	16QAM	8	0	22.61	22.68	22.55	22.61	22.68	22.55
3	16QAM	8	4	22.69	22.72	22.57	22.69	22.72	22.57
3	16QAM	8	7	22.58	22.62	22.50	22.58	22.62	22.50
3	16QAM	15	0	22.66	22.61	22.62	22.66	22.61	22.62
3	64QAM	1	0	22.48	22.66	22.63	22.48	22.66	22.63
3	64QAM	1	8	22.62	22.62	22.59	22.62	22.62	22.59
3	64QAM	1	14	22.72	22.78	22.82	22.72	22.78	22.82
3	64QAM	8	0	21.64	21.64	21.69	21.64	21.64	21.69
3	64QAM	8	4	21.69	21.61	21.61	21.69	21.61	21.61
3	64QAM	8	7	21.60	21.58	21.58	21.60	21.58	21.58
3	64QAM	15	0	21.73	21.73	21.55	21.73	21.73	21.55
Channel				23017	23095	23173	23017	23095	23173
Frequency (MHz)				699.7	707.5	715.3	699.7	707.5	715.3
1.4	QPSK	1	0	24.22	24.51	24.43	24.22	24.51	24.43
1.4	QPSK	1	3	24.46	24.42	24.48	24.46	24.42	24.48
1.4	QPSK	1	5	24.39	24.43	24.51	24.39	24.43	24.51
1.4	QPSK	3	0	24.31	24.53	24.38	24.31	24.53	24.38
1.4	QPSK	3	1	24.38	24.49	24.46	24.38	24.49	24.46
1.4	QPSK	3	3	24.34	24.49	24.44	24.34	24.49	24.44
1.4	QPSK	6	0	23.44	23.57	23.46	23.44	23.57	23.46
1.4	16QAM	1	0	23.61	23.79	23.69	23.61	23.79	23.69
1.4	16QAM	1	3	23.74	23.67	23.70	23.74	23.67	23.70
1.4	16QAM	1	5	23.54	23.84	23.67	23.54	23.84	23.67
1.4	16QAM	3	0	23.49	23.43	23.60	23.49	23.43	23.60
1.4	16QAM	3	1	23.48	23.55	23.53	23.48	23.55	23.53
1.4	16QAM	3	3	23.50	23.50	23.52	23.50	23.50	23.52
1.4	16QAM	6	0	22.60	22.56	22.70	22.60	22.56	22.70
1.4	64QAM	1	0	22.51	22.60	22.62	22.51	22.60	22.62
1.4	64QAM	1	3	22.51	22.63	22.74	22.51	22.63	22.74
1.4	64QAM	1	5	22.43	22.69	22.68	22.43	22.69	22.68
1.4	64QAM	3	0	22.48	22.70	22.63	22.48	22.70	22.63
1.4	64QAM	3	1	22.72	22.67	22.73	22.72	22.67	22.73
1.4	64QAM	3	3	22.47	22.66	22.70	22.47	22.66	22.70
1.4	64QAM	6	0	21.41	21.59	21.64	21.41	21.59	21.64



<Wifi on>

Power Selection				Head			Hotspot / Body-worn		
Transmit Antenna				Ant 0			Ant 0		
Max. Power				25.7			22.7		
BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.
Channel				23060	23095	23130	23060	23095	23130
Frequency (MHz)				704	707.5	711	704	707.5	711
10	QPSK	1	0	24.53	24.67	24.66	21.59	21.76	21.72
10	QPSK	1	25	24.65	24.66	24.65	21.71	21.52	21.70
10	QPSK	1	49	24.63	24.60	24.65	21.69	21.64	21.73
10	QPSK	25	0	23.69	23.79	23.68	21.73	21.91	21.76
10	QPSK	25	12	23.78	23.76	23.70	21.89	21.85	21.82
10	QPSK	25	25	23.77	23.73	23.67	21.85	21.83	21.77
10	QPSK	50	0	23.79	23.80	23.73	21.85	21.81	21.79
10	16QAM	1	0	23.87	23.90	23.97	21.51	21.53	21.60
10	16QAM	1	25	23.96	24.01	24.02	21.57	21.65	21.64
10	16QAM	1	49	24.05	24.02	24.09	21.69	21.69	21.69
10	16QAM	25	0	22.78	22.83	22.78	21.43	21.52	21.46
10	16QAM	25	12	22.89	22.86	22.81	21.56	21.53	21.50
10	16QAM	25	25	22.86	22.81	22.79	21.53	21.50	21.47
10	16QAM	50	0	22.86	22.82	22.79	21.54	21.51	21.47
10	64QAM	1	0	22.75	22.81	22.86	21.39	21.51	21.53
10	64QAM	1	25	22.86	22.88	22.87	21.58	21.61	21.60
10	64QAM	1	49	22.93	22.89	23.02	21.67	21.63	21.71
10	64QAM	25	0	21.78	21.85	21.82	21.44	21.47	21.44
10	64QAM	25	12	21.91	21.86	21.81	21.55	21.52	21.47
10	64QAM	25	25	21.86	21.82	21.78	21.50	21.50	21.45
10	64QAM	50	0	21.86	21.83	21.80	21.54	21.47	21.47
Channel				23035	23095	23155	23035	23095	23155
Frequency (MHz)				701.5	707.5	713.5	701.5	707.5	713.5
5	QPSK	1	0	24.36	24.54	24.52	21.45	21.40	21.51
5	QPSK	1	12	24.49	24.37	24.38	21.41	21.65	21.58
5	QPSK	1	24	24.46	24.38	24.40	21.57	21.51	21.55
5	QPSK	12	0	23.50	23.67	23.42	21.60	21.71	21.64
5	QPSK	12	7	23.62	23.64	23.42	21.71	21.65	21.53
5	QPSK	12	13	23.53	23.54	23.50	21.57	21.73	21.59
5	QPSK	25	0	23.56	23.51	23.53	21.60	21.59	21.62
5	16QAM	1	0	23.62	23.70	23.76	21.64	21.72	21.88
5	16QAM	1	12	23.68	23.71	23.73	21.79	21.82	21.85
5	16QAM	1	24	23.78	23.75	23.94	21.80	21.79	21.81
5	16QAM	12	0	22.62	22.70	22.58	21.59	21.66	21.69
5	16QAM	12	7	22.61	22.72	22.71	21.83	21.70	21.75
5	16QAM	12	13	22.70	22.52	22.64	21.75	21.71	21.68
5	16QAM	25	0	22.72	22.72	22.55	21.65	21.72	21.60
5	64QAM	1	0	22.45	22.71	22.70	21.69	21.72	21.77
5	64QAM	1	12	22.71	22.66	22.77	21.88	21.84	21.80
5	64QAM	1	24	22.79	22.64	22.77	21.82	21.88	21.85
5	64QAM	12	0	21.56	21.66	21.55	21.65	21.59	21.61
5	64QAM	12	7	21.80	21.58	21.68	21.75	21.72	21.70
5	64QAM	12	13	21.59	21.72	21.57	21.75	21.68	21.71
5	64QAM	25	0	21.60	21.66	21.56	21.66	21.72	21.59
Channel				23025	23095	23165	23025	23095	23165
Frequency (MHz)				700.5	707.5	714.5	700.5	707.5	714.5
3	QPSK	1	0	24.39	24.46	24.40	21.46	21.54	21.57
3	QPSK	1	8	24.46	24.48	24.46	21.42	21.54	21.48
3	QPSK	1	14	24.52	24.36	24.53	21.60	21.56	21.63
3	QPSK	8	0	23.39	23.50	23.53	21.56	21.58	21.66
3	QPSK	8	4	23.51	23.55	23.51	21.75	21.55	21.63
3	QPSK	8	7	23.63	23.63	23.45	21.64	21.64	21.50
3	QPSK	15	0	23.64	23.60	23.56	21.59	21.65	21.54
3	16QAM	1	0	23.70	23.75	23.87	21.62	21.73	21.70
3	16QAM	1	8	23.76	23.71	23.86	21.82	21.92	21.88
3	16QAM	1	14	23.87	23.79	23.96	21.89	21.93	21.93
3	16QAM	8	0	22.61	22.68	22.55	21.67	21.81	21.56
3	16QAM	8	4	22.69	22.72	22.57	21.75	21.64	21.66
3	16QAM	8	7	22.58	22.62	22.50	21.80	21.61	21.75
3	16QAM	15	0	22.66	22.61	22.62	21.67	21.76	21.74
3	64QAM	1	0	22.48	22.66	22.63	21.64	21.79	21.71
3	64QAM	1	8	22.62	22.62	22.59	21.75	21.83	21.86
3	64QAM	1	14	22.72	22.78	22.82	21.77	21.91	21.50
3	64QAM	8	0	21.64	21.64	21.69	21.56	21.77	21.74
3	64QAM	8	4	21.69	21.61	21.61	21.72	21.64	21.63



FCC SAR TEST REPORT

Report No. : FA891148-06

3	64QAM	8	7	21.60	21.58	21.58	21.73	21.60	21.58
3	64QAM	15	0	21.73	21.73	21.55	21.76	21.70	21.63
Channel				23017	23095	23173	23017	23095	23173
Frequency (MHz)				699.7	707.5	715.3	699.7	707.5	715.3
1.4	QPSK	1	0	24.22	24.51	24.43	21.13	21.24	21.42
1.4	QPSK	1	3	24.46	24.42	24.48	21.22	21.39	21.25
1.4	QPSK	1	5	24.39	24.43	24.51	21.35	21.41	21.44
1.4	QPSK	3	0	24.31	24.53	24.38	21.35	21.31	21.41
1.4	QPSK	3	1	24.38	24.49	24.46	21.41	21.55	21.50
1.4	QPSK	3	3	24.34	24.49	24.44	21.37	21.40	21.34
1.4	QPSK	6	0	23.44	23.57	23.46	21.53	21.35	21.47
1.4	16QAM	1	0	23.61	23.79	23.69	21.53	21.50	21.52
1.4	16QAM	1	3	23.74	23.67	23.70	21.52	21.70	21.69
1.4	16QAM	1	5	23.54	23.84	23.67	21.78	21.70	21.79
1.4	16QAM	3	0	23.49	23.43	23.60	21.36	21.55	21.54
1.4	16QAM	3	1	23.48	23.55	23.53	21.62	21.50	21.41
1.4	16QAM	3	3	23.50	23.50	23.52	21.54	21.57	21.57
1.4	16QAM	6	0	22.60	22.56	22.70	21.53	21.59	21.48
1.4	64QAM	1	0	22.51	22.60	22.62	21.46	21.50	21.46
1.4	64QAM	1	3	22.51	22.63	22.74	21.52	21.52	21.69
1.4	64QAM	1	5	22.43	22.69	22.68	21.59	21.56	21.81
1.4	64QAM	3	0	22.48	22.70	22.63	21.34	21.52	21.51
1.4	64QAM	3	1	22.72	22.67	22.73	21.49	21.53	21.38
1.4	64QAM	3	3	22.47	22.66	22.70	21.46	21.54	21.42
1.4	64QAM	6	0	21.41	21.59	21.64	21.54	21.54	21.45



<LTE Band 13>

<WiFi off>

Power Selection				Head			Hotspot / Body-worn		
Transmit Antenna				Ant 0			Ant 0 / Ant 1		
Max. Power				25.3			25.3		
BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.
Channel				23230			23230		
Frequency (MHz)				782			782		
10	QPSK	1	0	24.26			24.26		
10	QPSK	1	25	24.22			24.22		
10	QPSK	1	49	24.25			24.25		
10	QPSK	25	0	23.31			23.31		
10	QPSK	25	12	23.30			23.30		
10	QPSK	25	25	23.22			23.22		
10	QPSK	50	0	23.26			23.26		
10	16QAM	1	0	23.54			23.54		
10	16QAM	1	25	23.54			23.54		
10	16QAM	1	49	23.50			23.50		
10	16QAM	25	0	22.37			22.37		
10	16QAM	25	12	22.37			22.37		
10	16QAM	25	25	22.32			22.32		
10	16QAM	50	0	22.34			22.34		
10	64QAM	1	0	22.52			22.52		
10	64QAM	1	25	22.46			22.46		
10	64QAM	1	49	22.48			22.48		
10	64QAM	25	0	21.38			21.38		
10	64QAM	25	12	21.38			21.38		
10	64QAM	25	25	21.31			21.31		
10	64QAM	50	0	21.37			21.37		
Channel				23205	23230	23255	23205	23230	23255
Frequency (MHz)				779.5	782	784.5	779.5	782	784.5
5	QPSK	1	0	24.07	24.13	24.10	24.07	24.13	24.10
5	QPSK	1	12	24.04	23.93	24.04	24.04	23.93	24.04
5	QPSK	1	24	24.00	24.11	23.98	24.00	24.11	23.98
5	QPSK	12	0	23.04	23.07	23.13	23.04	23.07	23.13
5	QPSK	12	7	23.19	23.11	23.18	23.19	23.11	23.18
5	QPSK	12	13	23.08	23.04	22.93	23.08	23.04	22.93
5	QPSK	25	0	23.02	23.12	23.15	23.02	23.12	23.15
5	16QAM	1	0	23.43	23.25	23.35	23.43	23.25	23.35
5	16QAM	1	12	23.24	23.25	23.41	23.24	23.25	23.41
5	16QAM	1	24	23.23	23.38	23.26	23.23	23.38	23.26
5	16QAM	12	0	22.26	22.20	22.22	22.26	22.20	22.22
5	16QAM	12	7	22.11	22.21	22.13	22.11	22.21	22.13
5	16QAM	12	13	22.07	22.03	22.14	22.07	22.03	22.14
5	16QAM	25	0	22.22	22.24	22.09	22.22	22.24	22.09
5	64QAM	1	0	22.40	22.36	22.30	22.40	22.36	22.30
5	64QAM	1	12	22.31	22.16	22.27	22.31	22.16	22.27
5	64QAM	1	24	22.36	22.18	22.23	22.36	22.18	22.23
5	64QAM	12	0	21.17	21.20	21.22	21.17	21.20	21.22
5	64QAM	12	7	21.11	21.15	21.24	21.11	21.15	21.24
5	64QAM	12	13	21.01	21.08	21.18	21.01	21.08	21.18
5	64QAM	25	0	21.16	21.19	21.23	21.16	21.19	21.23



<WiFi on>

Power Selection				Head			Hotspot / Body-worn		
Transmit Antenna				Ant 0			Ant 0		
Max. Power				25.3			22.3		
BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.
Channel				23230			23230		
Frequency (MHz)				782			782		
10	QPSK	1	0	24.26			21.28		
10	QPSK	1	25	24.22			21.24		
10	QPSK	1	49	24.25			21.27		
10	QPSK	25	0	23.31			21.30		
10	QPSK	25	12	23.30			21.29		
10	QPSK	25	25	23.22			21.25		
10	QPSK	50	0	23.26			21.26		
10	16QAM	1	0	23.54			21.29		
10	16QAM	1	25	23.54			21.30		
10	16QAM	1	49	23.50			21.30		
10	16QAM	25	0	22.37			21.16		
10	16QAM	25	12	22.37			21.18		
10	16QAM	25	25	22.32			21.13		
10	16QAM	50	0	22.34			21.16		
10	64QAM	1	0	22.52			21.15		
10	64QAM	1	25	22.46			21.12		
10	64QAM	1	49	22.48			21.16		
10	64QAM	25	0	21.38			21.22		
10	64QAM	25	12	21.38			21.22		
10	64QAM	25	25	21.31			21.17		
10	64QAM	50	0	21.37			21.20		
Channel				23205	23230	23255	23205	23230	23255
Frequency (MHz)				779.5	782	784.5	779.5	782	784.5
5	QPSK	1	0	24.07	24.13	24.10	20.97	20.96	20.93
5	QPSK	1	12	24.04	23.93	24.04	20.97	20.92	21.00
5	QPSK	1	24	24.00	24.11	23.98	20.92	20.91	20.97
5	QPSK	12	0	23.04	23.07	23.13	21.02	20.98	20.98
5	QPSK	12	7	23.19	23.11	23.18	21.04	20.97	20.98
5	QPSK	12	13	23.08	23.04	22.93	20.98	20.95	21.02
5	QPSK	25	0	23.02	23.12	23.15	20.98	20.97	20.92
5	16QAM	1	0	23.43	23.25	23.35	21.24	21.19	21.26
5	16QAM	1	12	23.24	23.25	23.41	21.22	21.25	21.26
5	16QAM	1	24	23.23	23.38	23.26	21.26	21.24	21.25
5	16QAM	12	0	22.26	22.20	22.22	21.10	21.04	21.04
5	16QAM	12	7	22.11	22.21	22.13	21.12	21.07	21.06
5	16QAM	12	13	22.07	22.03	22.14	21.08	21.03	21.10
5	16QAM	25	0	22.22	22.24	22.09	21.07	21.05	21.03
5	64QAM	1	0	22.40	22.36	22.30	21.25	21.21	21.21
5	64QAM	1	12	22.31	22.16	22.27	21.21	21.20	21.26
5	64QAM	1	24	22.36	22.18	22.23	21.21	21.16	21.26
5	64QAM	12	0	21.17	21.20	21.22	21.15	21.14	21.07
5	64QAM	12	7	21.11	21.15	21.24	21.17	21.11	21.15
5	64QAM	12	13	21.01	21.08	21.18	21.16	21.12	21.16
5	64QAM	25	0	21.16	21.19	21.23	21.12	21.09	21.06

<LTE Band 17>

SAR for LTE B17 is covered by LTE B12 due to overlapping frequency range, the same maximum tune-up limit and the same channel bandwidth



<LTE Band 26>

<WiFi off>

Power Selection				Head			Hotspot / Body-worn		
Transmit Antenna				Ant 0			Ant 0 / Ant 1		
Max. Power				25.7			25.7		
BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.
Channel				26765	26865	26965	26765	26865	26965
Frequency (MHz)				821.5	831.5	841.5	821.5	831.5	841.5
15	QPSK	1	0	24.69	24.70	24.67	24.69	24.70	24.67
15	QPSK	1	37	24.60	24.68	24.64	24.60	24.68	24.64
15	QPSK	1	74	24.65	24.66	24.61	24.65	24.66	24.61
15	QPSK	36	0	23.66	23.73	23.69	23.66	23.73	23.69
15	QPSK	36	20	23.66	23.72	23.71	23.66	23.72	23.71
15	QPSK	36	39	23.71	23.69	23.64	23.71	23.69	23.64
15	QPSK	75	0	23.61	23.73	23.68	23.61	23.73	23.68
15	16QAM	1	0	23.77	23.92	23.95	23.77	23.92	23.95
15	16QAM	1	37	23.88	24.00	23.93	23.88	24.00	23.93
15	16QAM	1	74	23.99	23.89	23.90	23.99	23.89	23.90
15	16QAM	36	0	22.70	22.78	22.75	22.70	22.78	22.75
15	16QAM	36	20	22.73	22.80	22.76	22.73	22.80	22.76
15	16QAM	36	39	22.80	22.79	22.75	22.80	22.79	22.75
15	16QAM	75	0	22.70	22.77	22.75	22.70	22.77	22.75
15	64QAM	1	0	22.71	22.82	22.88	22.71	22.82	22.88
15	64QAM	1	37	22.84	22.91	22.86	22.84	22.91	22.86
15	64QAM	1	74	22.92	22.87	22.83	22.92	22.87	22.83
15	64QAM	36	0	21.71	21.81	21.75	21.71	21.81	21.75
15	64QAM	36	20	21.74	21.82	21.81	21.74	21.82	21.81
15	64QAM	36	39	21.80	21.78	21.72	21.80	21.78	21.72
15	64QAM	75	0	21.72	21.83	21.76	21.72	21.83	21.76
Channel				26740	26865	26990	26740	26865	26990
Frequency (MHz)				819	831.5	844	819	831.5	844
10	QPSK	1	0	24.55	24.46	24.54	24.55	24.46	24.54
10	QPSK	1	25	24.31	24.52	24.34	24.31	24.52	24.34
10	QPSK	1	49	24.50	24.54	24.40	24.50	24.54	24.40
10	QPSK	25	0	23.54	23.51	23.58	23.54	23.51	23.58
10	QPSK	25	12	23.52	23.51	23.45	23.52	23.51	23.45
10	QPSK	25	25	23.43	23.42	23.44	23.43	23.42	23.44
10	QPSK	50	0	23.44	23.44	23.38	23.44	23.44	23.38
10	16QAM	1	0	23.64	23.71	23.82	23.64	23.71	23.82
10	16QAM	1	25	23.70	23.88	23.67	23.70	23.88	23.67
10	16QAM	1	49	23.86	23.74	23.68	23.86	23.74	23.68
10	16QAM	25	0	22.46	22.64	22.62	22.46	22.64	22.62
10	16QAM	25	12	22.59	22.63	22.65	22.59	22.63	22.65
10	16QAM	25	25	22.62	22.66	22.61	22.62	22.66	22.61
10	16QAM	50	0	22.55	22.47	22.47	22.55	22.47	22.47
10	64QAM	1	0	22.55	22.65	22.74	22.55	22.65	22.74
10	64QAM	1	25	22.68	22.73	22.70	22.68	22.73	22.70
10	64QAM	1	49	22.76	22.59	22.58	22.76	22.59	22.58
10	64QAM	25	0	21.57	21.69	21.53	21.57	21.69	21.53
10	64QAM	25	12	21.54	21.60	21.68	21.54	21.60	21.68
10	64QAM	25	25	21.64	21.66	21.60	21.64	21.66	21.60
10	64QAM	50	0	21.52	21.69	21.59	21.52	21.69	21.59
Channel				26715	26865	27015	26715	26865	27015
Frequency (MHz)				816.5	831.5	846.5	816.5	831.5	846.5
5	QPSK	1	0	24.43	24.59	24.44	24.43	24.59	24.44
5	QPSK	1	12	24.35	24.58	24.34	24.35	24.58	24.34
5	QPSK	1	24	24.35	24.36	24.40	24.35	24.36	24.40
5	QPSK	12	0	23.48	23.54	23.50	23.48	23.54	23.50
5	QPSK	12	7	23.55	23.47	23.41	23.55	23.47	23.41
5	QPSK	12	13	23.46	23.55	23.47	23.46	23.55	23.47
5	QPSK	25	0	23.40	23.51	23.55	23.40	23.51	23.55
5	16QAM	1	0	23.58	23.67	23.81	23.58	23.67	23.81
5	16QAM	1	12	23.76	23.86	23.67	23.76	23.86	23.67
5	16QAM	1	24	23.88	23.69	23.71	23.88	23.69	23.71
5	16QAM	12	0	22.50	22.61	22.47	22.50	22.61	22.47
5	16QAM	12	7	22.43	22.69	22.46	22.43	22.69	22.46
5	16QAM	12	13	22.60	22.64	22.64	22.60	22.64	22.64
5	16QAM	25	0	22.58	22.58	22.64	22.58	22.58	22.64
5	64QAM	1	0	22.57	22.60	22.71	22.57	22.60	22.71
5	64QAM	1	12	22.73	22.65	22.73	22.73	22.65	22.73
5	64QAM	1	24	22.77	22.57	22.61	22.77	22.57	22.61



FCC SAR TEST REPORT

Report No. : FA891148-06

5	64QAM	12	0	21.54	21.57	21.48	21.54	21.57	21.48
5	64QAM	12	7	21.54	21.65	21.63	21.54	21.65	21.63
5	64QAM	12	13	21.68	21.61	21.59	21.68	21.61	21.59
5	64QAM	25	0	21.43	21.56	21.51	21.43	21.56	21.51
Channel				26705	26865	27025	26705	26865	27025
Frequency (MHz)				815.5	831.5	847.5	815.5	831.5	847.5
3	QPSK	1	0	24.44	24.50	24.41	24.44	24.50	24.41
3	QPSK	1	8	24.35	24.56	24.40	24.35	24.56	24.40
3	QPSK	1	14	24.44	24.36	24.51	24.44	24.36	24.51
3	QPSK	8	0	23.50	23.55	23.59	23.50	23.55	23.59
3	QPSK	8	4	23.55	23.43	23.58	23.55	23.43	23.58
3	QPSK	8	7	23.57	23.49	23.53	23.57	23.49	23.53
3	QPSK	15	0	23.41	23.47	23.58	23.41	23.47	23.58
3	16QAM	1	0	23.66	23.73	23.84	23.66	23.73	23.84
3	16QAM	1	8	23.72	23.88	23.71	23.72	23.88	23.71
3	16QAM	1	14	23.78	23.65	23.76	23.78	23.65	23.76
3	16QAM	8	0	22.42	22.49	22.48	22.42	22.49	22.48
3	16QAM	8	4	22.56	22.67	22.59	22.56	22.67	22.59
3	16QAM	8	7	22.56	22.56	22.53	22.56	22.56	22.53
3	16QAM	15	0	22.44	22.47	22.55	22.44	22.47	22.55
3	64QAM	1	0	22.52	22.62	22.78	22.52	22.62	22.78
3	64QAM	1	8	22.55	22.78	22.68	22.55	22.78	22.68
3	64QAM	1	14	22.69	22.77	22.63	22.69	22.77	22.63
3	64QAM	8	0	21.46	21.71	21.52	21.46	21.71	21.52
3	64QAM	8	4	21.49	21.65	21.65	21.49	21.65	21.65
3	64QAM	8	7	21.65	21.51	21.49	21.65	21.51	21.49
3	64QAM	15	0	21.62	21.60	21.49	21.62	21.60	21.49
Channel				26697	26865	27033	26697	26865	27033
Frequency (MHz)				814.7	831.5	848.3	814.7	831.5	848.3
1.4	QPSK	1	0	24.48	24.58	24.53	24.48	24.58	24.53
1.4	QPSK	1	3	24.55	24.66	24.59	24.55	24.66	24.59
1.4	QPSK	1	5	24.45	24.58	24.52	24.45	24.58	24.52
1.4	QPSK	3	0	24.49	24.64	24.56	24.49	24.64	24.56
1.4	QPSK	3	1	24.55	24.66	24.59	24.55	24.66	24.59
1.4	QPSK	3	3	24.51	24.63	24.57	24.51	24.63	24.57
1.4	QPSK	6	0	23.51	23.64	23.57	23.51	23.64	23.57
1.4	16QAM	1	0	23.73	23.88	23.86	23.73	23.88	23.86
1.4	16QAM	1	3	23.76	24.03	23.91	23.76	24.03	23.91
1.4	16QAM	1	5	23.71	23.90	23.83	23.71	23.90	23.83
1.4	16QAM	3	0	23.53	23.72	23.60	23.53	23.72	23.60
1.4	16QAM	3	1	23.56	23.76	23.65	23.56	23.76	23.65
1.4	16QAM	3	3	23.52	23.68	23.58	23.52	23.68	23.58
1.4	16QAM	6	0	22.64	22.76	22.70	22.64	22.76	22.70
1.4	64QAM	1	0	22.67	22.86	22.73	22.67	22.86	22.73
1.4	64QAM	1	3	22.73	22.93	22.78	22.73	22.93	22.78
1.4	64QAM	1	5	22.63	22.82	22.70	22.63	22.82	22.70
1.4	64QAM	3	0	22.67	22.81	22.76	22.67	22.81	22.76
1.4	64QAM	3	1	22.71	22.87	22.80	22.71	22.87	22.80
1.4	64QAM	3	3	22.68	22.87	22.73	22.68	22.87	22.73
1.4	64QAM	6	0	21.60	21.71	21.65	21.60	21.71	21.65



<Wifi on>

Power Selection				Head			Hotspot / Body-worn		
Transmit Antenna				Ant 0			Ant 0		
Max. Power				25.7			23.7		
BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.
Channel				26765	26865	26965	26765	26865	26965
Frequency (MHz)				821.5	831.5	841.5	821.5	831.5	841.5
15	QPSK	1	0	24.69	24.70	24.67	22.50	22.57	22.63
15	QPSK	1	37	24.60	24.68	24.64	22.28	22.40	22.40
15	QPSK	1	74	24.65	24.66	24.61	22.36	22.39	22.40
15	QPSK	36	0	23.66	23.73	23.69	22.36	22.46	22.37
15	QPSK	36	20	23.66	23.72	23.71	22.49	22.47	22.36
15	QPSK	36	39	23.71	23.69	23.64	22.45	22.42	22.42
15	QPSK	75	0	23.61	23.73	23.68	22.43	22.44	22.34
15	16QAM	1	0	23.77	23.92	23.95	22.31	22.47	22.45
15	16QAM	1	37	23.88	24.00	23.93	22.39	22.50	22.48
15	16QAM	1	74	23.99	23.89	23.90	22.46	22.42	22.45
15	16QAM	36	0	22.70	22.78	22.75	22.20	22.31	22.19
15	16QAM	36	20	22.73	22.80	22.76	22.31	22.33	22.21
15	16QAM	36	39	22.80	22.79	22.75	22.27	22.30	22.26
15	16QAM	75	0	22.70	22.77	22.75	22.26	22.30	22.18
15	64QAM	1	0	22.71	22.82	22.88	22.26	22.39	22.38
15	64QAM	1	37	22.84	22.91	22.86	22.35	22.46	22.39
15	64QAM	1	74	22.92	22.87	22.83	22.42	22.40	22.37
15	64QAM	36	0	21.71	21.81	21.75	21.24	21.34	21.27
15	64QAM	36	20	21.74	21.82	21.81	21.37	21.36	21.25
15	64QAM	36	39	21.80	21.78	21.72	21.30	21.33	21.31
15	64QAM	75	0	21.72	21.83	21.76	21.30	21.33	21.22
Channel				26740	26865	26990	26740	26865	26990
Frequency (MHz)				819	831.5	844	819	831.5	844
10	QPSK	1	0	24.55	24.46	24.54	22.24	22.34	22.50
10	QPSK	1	25	24.31	24.52	24.34	22.06	22.21	22.22
10	QPSK	1	49	24.50	24.54	24.40	22.22	22.26	22.20
10	QPSK	25	0	23.54	23.51	23.58	22.17	22.22	22.11
10	QPSK	25	12	23.52	23.51	23.45	22.35	22.19	22.08
10	QPSK	25	25	23.43	23.42	23.44	22.34	22.19	22.32
10	QPSK	50	0	23.44	23.44	23.38	22.25	22.16	22.04
10	16QAM	1	0	23.64	23.71	23.82	22.02	22.28	22.30
10	16QAM	1	25	23.70	23.88	23.67	22.09	22.35	22.23
10	16QAM	1	49	23.86	23.74	23.68	22.29	22.12	22.35
10	16QAM	25	0	22.46	22.64	22.62	22.06	22.02	22.00
10	16QAM	25	12	22.59	22.63	22.65	22.08	22.11	21.93
10	16QAM	25	25	22.62	22.66	22.61	22.03	22.03	21.97
10	16QAM	50	0	22.55	22.47	22.47	22.13	22.06	21.89
10	64QAM	1	0	22.55	22.65	22.74	22.16	22.18	22.12
10	64QAM	1	25	22.68	22.73	22.70	22.22	22.21	22.10
10	64QAM	1	49	22.76	22.59	22.58	22.17	22.19	22.22
10	64QAM	25	0	21.57	21.69	21.53	21.13	21.17	20.99
10	64QAM	25	12	21.54	21.60	21.68	21.24	21.06	20.96
10	64QAM	25	25	21.64	21.66	21.60	21.18	21.23	21.09
10	64QAM	50	0	21.52	21.69	21.59	21.03	21.10	21.00
Channel				26715	26865	27015	26715	26865	27015
Frequency (MHz)				816.5	831.5	846.5	816.5	831.5	846.5
5	QPSK	1	0	24.43	24.59	24.44	22.34	22.42	22.40
5	QPSK	1	12	24.35	24.58	24.34	22.12	22.17	22.24
5	QPSK	1	24	24.35	24.36	24.40	22.24	22.15	22.12
5	QPSK	12	0	23.48	23.54	23.50	22.21	22.26	22.24
5	QPSK	12	7	23.55	23.47	23.41	22.38	22.28	22.15
5	QPSK	12	13	23.46	23.55	23.47	22.16	22.29	22.17
5	QPSK	25	0	23.40	23.51	23.55	22.13	22.34	22.22
5	16QAM	1	0	23.58	23.67	23.81	22.21	22.23	22.18
5	16QAM	1	12	23.76	23.86	23.67	22.14	22.20	22.27
5	16QAM	1	24	23.88	23.69	23.71	22.25	22.29	22.19
5	16QAM	12	0	22.50	22.61	22.47	21.90	22.01	22.03
5	16QAM	12	7	22.43	22.69	22.46	22.17	22.16	22.07
5	16QAM	12	13	22.60	22.64	22.64	22.09	22.19	22.11
5	16QAM	25	0	22.58	22.58	22.64	21.96	22.19	21.94
5	64QAM	1	0	22.57	22.60	22.71	21.98	22.27	22.10
5	64QAM	1	12	22.73	22.65	22.73	22.06	22.20	22.17
5	64QAM	1	24	22.77	22.57	22.61	22.20	22.26	22.07
5	64QAM	12	0	21.54	21.57	21.48	20.99	21.19	20.97
5	64QAM	12	7	21.54	21.65	21.63	21.16	21.13	21.08



FCC SAR TEST REPORT

Report No. : FA891148-06

5	64QAM	12	13	21.68	21.61	21.59	21.20	21.08	21.20
5	64QAM	25	0	21.43	21.56	21.51	21.09	21.06	20.93
Channel				26705	26865	27025	26705	26865	27025
Frequency (MHz)				815.5	831.5	847.5	815.5	831.5	847.5
3	QPSK	1	0	24.44	24.50	24.41	22.27	22.38	22.38
3	QPSK	1	8	24.35	24.56	24.40	22.07	22.29	22.16
3	QPSK	1	14	24.44	24.36	24.51	22.16	22.19	22.10
3	QPSK	8	0	23.50	23.55	23.59	22.24	22.34	22.20
3	QPSK	8	4	23.55	23.43	23.58	22.24	22.37	22.15
3	QPSK	8	7	23.57	23.49	23.53	22.31	22.21	22.15
3	QPSK	15	0	23.41	23.47	23.58	22.29	22.26	22.19
3	16QAM	1	0	23.66	23.73	23.84	22.15	22.26	22.32
3	16QAM	1	8	23.72	23.88	23.71	22.22	22.24	22.26
3	16QAM	1	14	23.78	23.65	23.76	22.30	22.16	22.32
3	16QAM	8	0	22.42	22.49	22.48	22.07	22.10	21.91
3	16QAM	8	4	22.56	22.67	22.59	22.13	22.22	22.01
3	16QAM	8	7	22.56	22.56	22.53	22.05	22.01	22.11
3	16QAM	15	0	22.44	22.47	22.55	22.10	22.19	21.95
3	64QAM	1	0	22.52	22.62	22.78	22.07	22.12	22.09
3	64QAM	1	8	22.55	22.78	22.68	22.07	22.23	22.25
3	64QAM	1	14	22.69	22.77	22.63	22.21	22.28	22.08
3	64QAM	8	0	21.46	21.71	21.52	21.00	21.20	21.15
3	64QAM	8	4	21.49	21.65	21.65	21.12	21.19	21.02
3	64QAM	8	7	21.65	21.51	21.49	21.16	21.15	21.06
3	64QAM	15	0	21.62	21.60	21.49	21.04	21.13	20.92
Channel				26697	26865	27033	26697	26865	27033
Frequency (MHz)				814.7	831.5	848.3	814.7	831.5	848.3
1.4	QPSK	1	0	24.48	24.58	24.53	22.14	22.27	22.19
1.4	QPSK	1	3	24.55	24.66	24.59	22.01	22.13	22.17
1.4	QPSK	1	5	24.45	24.58	24.52	22.06	22.19	22.19
1.4	QPSK	3	0	24.49	24.64	24.56	22.25	22.30	22.21
1.4	QPSK	3	1	24.55	24.66	24.59	22.25	22.33	22.16
1.4	QPSK	3	3	24.51	24.63	24.57	22.32	22.16	22.22
1.4	QPSK	6	0	23.51	23.64	23.57	22.21	22.30	22.21
1.4	16QAM	1	0	23.73	23.88	23.86	22.32	22.38	22.50
1.4	16QAM	1	3	23.76	24.03	23.91	22.31	22.56	22.38
1.4	16QAM	1	5	23.71	23.90	23.83	22.56	22.48	22.46
1.4	16QAM	3	0	23.53	23.72	23.60	22.18	22.31	22.16
1.4	16QAM	3	1	23.56	23.76	23.65	22.41	22.41	22.23
1.4	16QAM	3	3	23.52	23.68	23.58	22.19	22.30	22.26
1.4	16QAM	6	0	22.64	22.76	22.70	22.25	22.25	22.26
1.4	64QAM	1	0	22.67	22.86	22.73	22.16	22.35	22.42
1.4	64QAM	1	3	22.73	22.93	22.78	22.41	22.46	22.33
1.4	64QAM	1	5	22.63	22.82	22.70	22.40	22.42	22.32
1.4	64QAM	3	0	22.67	22.81	22.76	21.31	21.35	21.34
1.4	64QAM	3	1	22.71	22.87	22.80	21.33	21.29	21.22
1.4	64QAM	3	3	22.68	22.87	22.73	21.40	21.40	21.32
1.4	64QAM	6	0	21.60	21.71	21.65	21.21	21.35	21.24

<TDD LTE SAR Measurement>

TDD LTE configuration setup for SAR measurement

SAR was tested with a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by 3GPP.

- a. 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations
- b. "special subframe S" contains both uplink and downlink transmissions, it has been taken into consideration to determine the transmission duty factor according to the worst case uplink and downlink cyclic prefix requirements for UpPTS
- c. Establishing connections with base station simulators ensure a consistent means for testing SAR and recommended for evaluating SAR. The Anritsu MT8820C (firmware: #22.52#004) was used for LTE output power measurements and SAR testing.

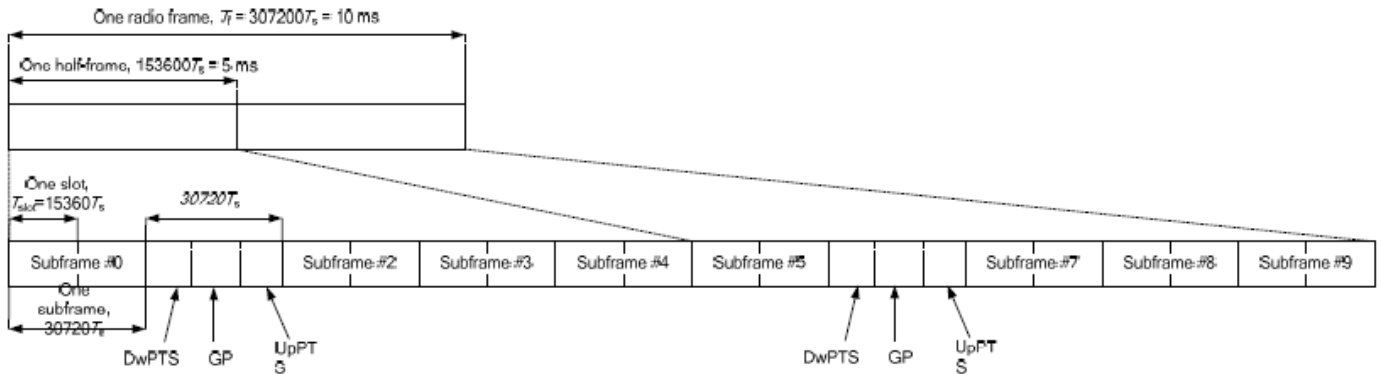


Figure 4.2-1: Frame structure type 2 (for 5 ms switch-point periodicity).

Table 4.2-2: Uplink-downlink configurations.

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS).

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink				
	DwPTS	UpPTS		DwPTS	UpPTS			
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		
0	6592 · Ts	2192 · Ts	2560 · Ts	7680 · Ts	2192 · Ts	2560 · Ts		
1	19760 · Ts			20480 · Ts				
2	21952 · Ts			23040 · Ts				
3	24144 · Ts			25600 · Ts				
4	26336 · Ts			7680 · Ts				
5	6592 · Ts	4384 · Ts	5120 · Ts	20480 · Ts	4384 · Ts	5120 · Ts		
6	19760 · Ts			23040 · Ts				
7	21952 · Ts			12800 · Ts				
8	24144 · Ts			-			-	-
9	13168 · Ts			-			-	-



Special subframe (30720·T_s): Normal cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~4	7.13%	8.33%
	5~9	14.3%	16.7%

Special subframe(30720·T_s): Extended cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~3	7.13%	8.33%
	4~7	14.3%	16.7%

The highest duty factor is resulted from:

- i. Uplink-downlink configuration: 0. In a half-frame consisted of 5 subframes, uplink operation is in 3 uplink subframes and 1 special subframe.
- ii. special subframe configuration: 5-9 for normal cyclic prefix in downlink, 4-7 for extended cyclic prefix in downlink
- iii. for special subframe with extended cyclic prefix in uplink, the total uplink duty factor in one half-frame is: $(3+0.167)/5 = 63.3\%$
- iv. for special subframe with normal cyclic prefix in uplink, the total uplink duty factor in one half-frame is: $(3+0.143)/5 = 62.9\%$
- v. For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix $63.3\%/62.9\% = 1.006$ is applied to scale-up the measured SAR result. The scaled TDD LTE SAR = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.
- vi. The device supports Power Class 3 uplink-downlink configurations 0 and 6, and Power Class 2 uplink-downlink configurations 1 to 5 operations for LTE Band 41.
- vii. The highest available duty cycle for Power Class 2 operation is 43.3% using UL-DL configuration 1, for Power Class 3 operation is 63.3% using UL-DL configuration 0. Per FCC Guidance, all SAR tests were performed using Power Class 3. SAR with Power Class 2 at the available duty factor was additionally performed for the Power Class 3 configuration with the highest SAR among all exposure condition.



<LTE Band 38>

<WiFi off>

Power Selection				Head			Hotspot / Body-worn		
Transmit Antenna				Ant 2			Ant 2		
Max. Power				25.7			25.7		
BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.
Channel				37850	38000	38150	37850	38000	38150
Frequency (MHz)				2580	2595	2610	2580	2595	2610
20	QPSK	1	0	24.50	24.57	24.56	24.50	24.57	24.56
20	QPSK	1	49	24.43	24.48	24.48	24.43	24.48	24.48
20	QPSK	1	99	24.45	24.52	24.50	24.45	24.52	24.50
20	QPSK	50	0	23.52	23.55	23.57	23.52	23.55	23.57
20	QPSK	50	24	23.53	23.56	23.59	23.53	23.56	23.59
20	QPSK	50	50	23.53	23.62	23.56	23.53	23.60	23.56
20	QPSK	100	0	23.51	23.56	23.55	23.51	23.56	23.55
20	16QAM	1	0	23.59	23.64	23.65	23.59	23.64	23.65
20	16QAM	1	49	23.55	23.57	23.59	23.55	23.57	23.59
20	16QAM	1	99	23.62	23.64	23.64	23.62	23.64	23.64
20	16QAM	50	0	22.58	22.61	22.66	22.58	22.61	22.66
20	16QAM	50	24	22.62	22.63	22.66	22.62	22.63	22.66
20	16QAM	50	50	22.62	22.63	22.67	22.62	22.63	22.67
20	16QAM	100	0	22.59	22.62	22.65	22.59	22.62	22.65
20	64QAM	1	0	22.33	22.36	22.38	22.33	22.36	22.38
20	64QAM	1	49	22.27	22.31	22.34	22.27	22.31	22.34
20	64QAM	1	99	22.35	22.36	22.40	22.35	22.36	22.40
20	64QAM	50	0	21.58	21.62	21.63	21.58	21.62	21.63
20	64QAM	50	24	21.58	21.63	21.63	21.58	21.63	21.63
20	64QAM	50	50	21.59	21.62	21.66	21.59	21.62	21.66
20	64QAM	100	0	21.59	21.62	21.64	21.59	21.62	21.64
Channel				37825	38000	38175	37825	38000	38175
Frequency (MHz)				2577.5	2595	2612.5	2577.5	2595	2612.5
15	QPSK	1	0	24.21	24.38	24.45	24.21	24.38	24.45
15	QPSK	1	37	24.32	24.30	24.28	24.32	24.30	24.28
15	QPSK	1	74	24.19	24.24	24.30	24.19	24.24	24.30
15	QPSK	36	0	23.37	23.42	23.41	23.37	23.42	23.41
15	QPSK	36	20	23.25	23.42	23.38	23.25	23.42	23.38
15	QPSK	36	39	23.39	23.30	23.42	23.39	23.30	23.42
15	QPSK	75	0	23.38	23.30	23.40	23.38	23.30	23.40
15	16QAM	1	0	23.29	23.40	23.49	23.29	23.40	23.49
15	16QAM	1	37	23.45	23.44	23.46	23.45	23.44	23.46
15	16QAM	1	74	23.47	23.39	23.34	23.47	23.39	23.34
15	16QAM	36	0	22.30	22.42	22.36	22.30	22.42	22.36
15	16QAM	36	20	22.44	22.37	22.39	22.44	22.37	22.39
15	16QAM	36	39	22.42	22.44	22.51	22.42	22.44	22.51
15	16QAM	75	0	22.36	22.40	22.52	22.36	22.40	22.52
15	64QAM	1	0	22.17	22.22	22.14	22.17	22.22	22.14
15	64QAM	1	37	21.98	22.18	22.04	21.98	22.18	22.04
15	64QAM	1	74	22.23	22.24	22.19	22.23	22.24	22.19
15	64QAM	36	0	21.39	21.34	21.51	21.39	21.34	21.51
15	64QAM	36	20	21.30	21.46	21.46	21.30	21.46	21.46
15	64QAM	36	39	21.48	21.52	21.47	21.48	21.52	21.47
15	64QAM	75	0	21.38	21.34	21.38	21.38	21.34	21.38
Channel				37800	38000	38200	37800	38000	38200
Frequency (MHz)				2575	2595	2615	2575	2595	2615
10	QPSK	1	0	24.26	24.33	24.44	24.26	24.33	24.44
10	QPSK	1	25	24.32	24.20	24.28	24.32	24.20	24.28
10	QPSK	1	49	24.31	24.38	24.34	24.31	24.38	24.34
10	QPSK	25	0	23.23	23.37	23.42	23.23	23.37	23.42
10	QPSK	25	12	23.42	23.34	23.36	23.42	23.34	23.36
10	QPSK	25	25	23.25	23.44	23.46	23.25	23.44	23.46
10	QPSK	50	0	23.23	23.41	23.29	23.23	23.41	23.29
10	16QAM	1	0	23.31	23.38	23.35	23.31	23.38	23.35
10	16QAM	1	25	23.34	23.28	23.41	23.34	23.28	23.41
10	16QAM	1	49	23.34	23.45	23.41	23.34	23.45	23.41
10	16QAM	25	0	22.44	22.51	22.36	22.44	22.51	22.36
10	16QAM	25	12	22.48	22.47	22.48	22.48	22.47	22.48
10	16QAM	25	25	22.39	22.48	22.37	22.39	22.48	22.37
10	16QAM	50	0	22.30	22.41	22.46	22.30	22.41	22.46
10	64QAM	1	0	22.19	22.09	22.28	22.19	22.09	22.28
10	64QAM	1	25	22.03	22.10	22.08	22.03	22.10	22.08
10	64QAM	1	49	22.24	22.25	22.17	22.24	22.25	22.17



FCC SAR TEST REPORT

Report No. : FA891148-06

10	64QAM	25	0	21.44	21.44	21.48	21.44	21.44	21.48
10	64QAM	25	12	21.35	21.43	21.49	21.35	21.43	21.49
10	64QAM	25	25	21.38	21.34	21.56	21.38	21.34	21.56
10	64QAM	50	0	21.42	21.32	21.45	21.42	21.32	21.45
Channel				37775	38000	38225	37775	38000	38225
Frequency (MHz)				2572.5	2595	2617.5	2572.5	2595	2617.5
5	QPSK	1	0	24.37	24.28	24.31	24.37	24.28	24.31
5	QPSK	1	12	24.21	24.30	24.30	24.21	24.30	24.30
5	QPSK	1	24	24.21	24.39	24.30	24.21	24.39	24.30
5	QPSK	12	0	23.30	23.30	23.37	23.30	23.30	23.37
5	QPSK	12	7	23.29	23.27	23.36	23.29	23.27	23.36
5	QPSK	12	13	23.34	23.40	23.31	23.34	23.40	23.31
5	QPSK	25	0	23.34	23.35	23.27	23.34	23.35	23.27
5	16QAM	1	0	23.48	23.49	23.45	23.48	23.49	23.45
5	16QAM	1	12	23.38	23.44	23.48	23.38	23.44	23.48
5	16QAM	1	24	23.40	23.40	23.42	23.40	23.40	23.42
5	16QAM	12	0	22.32	22.44	22.45	22.32	22.44	22.45
5	16QAM	12	7	22.48	22.34	22.49	22.48	22.34	22.49
5	16QAM	12	13	22.36	22.51	22.55	22.36	22.51	22.55
5	16QAM	25	0	22.46	22.42	22.35	22.46	22.42	22.35
5	64QAM	1	0	22.20	22.17	22.16	22.20	22.17	22.16
5	64QAM	1	12	22.08	22.01	22.15	22.08	22.01	22.15
5	64QAM	1	24	22.07	22.24	22.14	22.07	22.24	22.14
5	64QAM	12	0	21.30	21.38	21.48	21.30	21.38	21.48
5	64QAM	12	7	21.38	21.47	21.42	21.38	21.47	21.42
5	64QAM	12	13	21.38	21.46	21.53	21.38	21.46	21.53
5	64QAM	25	0	21.31	21.50	21.50	21.31	21.50	21.50



<WiFi on>

Power Selection				Head			Hotspot / Body-worn		
Transmit Antenna				Ant 2			Ant 2		
Max. Power				23.2			21.2		
BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.
Channel				37850	38000	38150	37850	38000	38150
Frequency (MHz)				2580	2595	2610	2580	2595	2610
20	QPSK	1	0	22.35	22.36	22.39	20.25	20.35	20.29
20	QPSK	1	49	22.33	22.36	22.38	20.26	20.27	20.29
20	QPSK	1	99	22.43	22.46	22.45	20.34	20.38	20.36
20	QPSK	50	0	22.22	22.21	22.27	20.17	20.22	20.21
20	QPSK	50	24	22.24	22.26	22.30	20.20	20.25	20.20
20	QPSK	50	50	22.26	22.28	22.32	20.21	20.27	20.22
20	QPSK	100	0	22.20	22.24	22.28	20.19	20.23	20.22
20	16QAM	1	0	22.24	22.28	22.30	20.21	20.28	20.22
20	16QAM	1	49	22.20	22.27	22.26	20.17	20.21	20.22
20	16QAM	1	99	22.28	22.32	22.34	20.24	20.31	20.22
20	16QAM	50	0	22.29	22.30	22.33	20.17	20.22	20.24
20	16QAM	50	24	22.29	22.31	22.36	20.20	20.23	20.25
20	16QAM	50	50	22.31	22.35	22.36	20.22	20.25	20.24
20	16QAM	100	0	22.29	22.33	22.31	20.18	20.21	20.24
20	64QAM	1	0	22.00	22.04	22.07	20.26	20.32	20.32
20	64QAM	1	49	21.98	22.01	22.03	20.26	20.30	20.30
20	64QAM	1	99	22.04	22.07	22.08	20.30	20.35	20.33
20	64QAM	50	0	21.75	21.78	21.82	20.19	20.23	20.22
20	64QAM	50	24	21.76	21.81	21.81	20.21	20.24	20.27
20	64QAM	50	50	21.78	21.81	21.83	20.19	20.25	20.26
20	64QAM	100	0	21.77	21.82	21.82	20.20	20.23	20.25
Channel				37825	38000	38175	37825	38000	38175
Frequency (MHz)				2577.5	2595	2612.5	2577.5	2595	2612.5
15	QPSK	1	0	22.32	22.26	22.39	20.13	20.16	20.29
15	QPSK	1	37	22.24	22.25	22.35	20.09	20.22	20.24
15	QPSK	1	74	22.37	22.34	22.42	20.19	20.37	20.33
15	QPSK	36	0	22.08	22.20	22.12	20.08	20.19	20.12
15	QPSK	36	20	22.18	22.26	22.12	20.14	20.21	20.09
15	QPSK	36	39	22.06	22.13	22.23	20.16	20.18	20.14
15	QPSK	75	0	22.20	22.09	22.14	20.17	20.05	20.10
15	16QAM	1	0	22.17	22.16	22.28	20.11	20.22	20.03
15	16QAM	1	37	22.03	22.16	22.17	19.99	20.21	20.22
15	16QAM	1	74	22.22	22.32	22.20	20.13	20.27	20.16
15	16QAM	36	0	22.11	22.12	22.14	20.03	20.14	20.10
15	16QAM	36	20	22.25	22.30	22.27	20.16	20.23	20.14
15	16QAM	36	39	22.27	22.26	22.23	20.05	20.07	20.15
15	16QAM	75	0	22.28	22.23	22.15	20.12	20.14	20.14
15	64QAM	1	0	21.83	21.89	22.00	20.14	20.20	20.30
15	64QAM	1	37	21.94	21.83	21.91	20.19	20.21	20.29
15	64QAM	1	74	21.92	21.96	22.03	20.24	20.26	20.21
15	64QAM	36	0	21.65	21.58	21.71	20.11	20.08	20.08
15	64QAM	36	20	21.74	21.75	21.74	20.16	20.16	20.22
15	64QAM	36	39	21.73	21.65	21.76	20.01	20.16	20.23
15	64QAM	75	0	21.71	21.72	21.75	20.18	20.13	20.09
Channel				37800	38000	38200	37800	38000	38200
Frequency (MHz)				2575	2595	2615	2575	2595	2615
10	QPSK	1	0	22.18	22.34	22.24	20.24	20.18	20.13
10	QPSK	1	25	22.32	22.26	22.37	20.08	20.16	20.28
10	QPSK	1	49	22.37	22.35	22.42	20.21	20.20	20.16
10	QPSK	25	0	22.19	22.05	22.20	20.17	20.10	20.16
10	QPSK	25	12	22.17	22.15	22.19	20.00	20.12	20.15
10	QPSK	25	25	22.10	22.13	22.28	20.19	20.26	20.17
10	QPSK	50	0	22.12	22.10	22.09	20.13	20.11	20.05
10	16QAM	1	0	22.12	22.10	22.22	20.20	20.26	20.08
10	16QAM	1	25	22.04	22.08	22.06	20.15	20.14	20.11
10	16QAM	1	49	22.15	22.24	22.16	20.04	20.29	20.05
10	16QAM	25	0	22.15	22.11	22.14	20.12	20.02	20.05
10	16QAM	25	12	22.11	22.31	22.18	20.15	20.21	20.15
10	16QAM	25	25	22.12	22.21	22.30	20.08	20.22	20.15
10	16QAM	50	0	22.11	22.15	22.26	20.14	20.07	20.09
10	64QAM	1	0	21.89	21.97	21.99	20.12	20.15	20.15
10	64QAM	1	25	21.85	21.91	22.00	20.13	20.28	20.27
10	64QAM	1	49	21.92	21.97	21.88	20.13	20.19	20.16
10	64QAM	25	0	21.66	21.72	21.78	20.12	20.04	20.02
10	64QAM	25	12	21.66	21.73	21.67	20.19	20.15	20.17



FCC SAR TEST REPORT

Report No. : FA891148-06

10	64QAM	25	25	21.78	21.69	21.77	20.02	20.07	20.07
10	64QAM	50	0	21.72	21.68	21.82	20.03	20.13	20.12
Channel				37775	38000	38225	37775	38000	38225
Frequency (MHz)				2572.5	2595	2617.5	2572.5	2595	2617.5
5	QPSK	1	0	22.22	22.24	22.35	20.17	20.28	20.16
5	QPSK	1	12	22.16	22.29	22.29	20.18	20.27	20.21
5	QPSK	1	24	22.37	22.30	22.31	20.24	20.28	20.28
5	QPSK	12	0	22.02	22.16	22.16	20.08	20.05	20.14
5	QPSK	12	7	22.10	22.13	22.13	20.15	20.13	20.12
5	QPSK	12	13	22.12	22.08	22.27	20.05	20.09	20.05
5	QPSK	25	0	22.07	22.20	22.12	20.17	20.14	20.22
5	16QAM	1	0	22.18	22.11	22.14	20.13	20.09	20.15
5	16QAM	1	12	22.04	22.27	22.26	20.11	20.20	20.14
5	16QAM	1	24	22.13	22.18	22.29	20.15	20.13	20.07
5	16QAM	12	0	22.19	22.13	22.18	20.17	20.02	20.14
5	16QAM	12	7	22.10	22.25	22.22	20.15	20.09	20.22
5	16QAM	12	13	22.23	22.31	22.24	20.04	20.18	20.11
5	16QAM	25	0	22.10	22.28	22.11	20.18	20.16	20.23
5	64QAM	1	0	21.95	21.94	21.92	20.17	20.31	20.24
5	64QAM	1	12	21.90	22.00	21.94	20.24	20.24	20.27
5	64QAM	1	24	21.93	22.00	21.92	20.15	20.28	20.13
5	64QAM	12	0	21.69	21.61	21.74	20.11	20.11	20.20
5	64QAM	12	7	21.57	21.63	21.73	20.17	20.20	20.18
5	64QAM	12	13	21.77	21.80	21.71	20.17	20.10	20.19
5	64QAM	25	0	21.62	21.62	21.69	20.19	20.12	20.21



<LTE Band 41>

<WiFi off>

Power Selection				Head					Hotspot / Body-worn				
Transmit Antenna				Ant 2					Ant 2				
Max. Power				25					25				
BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Low Middle Ch. / Freq.	Power Middle Ch. / Freq.	Power High Middle Ch. / Freq.	Power High Ch. / Freq.	Power Low Ch. / Freq.	Power Low Middle Ch. / Freq.	Power Middle Ch. / Freq.	Power High Middle Ch. / Freq.	Power High Ch. / Freq.
Channel				39750	40185	40620	41055	41490	39750	40185	40620	41055	41490
Frequency (MHz)				2506	2549.5	2593	2636.5	2680	2506	2549.5	2593	2636.5	2680
20	QPSK	1	0	23.87	23.94	23.92	23.97	24.05	23.87	23.94	23.92	23.97	24.05
20	QPSK	1	49	23.72	23.82	23.78	23.90	23.92	23.72	23.82	23.78	23.90	23.92
20	QPSK	1	99	23.75	23.75	23.82	23.94	23.85	23.75	23.75	23.82	23.94	23.85
20	QPSK	50	0	22.91	22.95	22.92	23.03	23.06	22.91	22.95	22.92	23.03	23.06
20	QPSK	50	24	22.88	22.84	22.89	22.99	23.00	22.88	22.84	22.89	22.99	23.00
20	QPSK	50	50	22.82	22.82	22.88	22.99	22.94	22.82	22.82	22.88	22.99	22.94
20	QPSK	100	0	22.85	22.81	22.89	22.91	23.00	22.85	22.81	22.89	22.91	23.00
20	16QAM	1	0	22.99	23.04	23.01	23.10	23.17	22.99	23.04	23.01	23.10	23.17
20	16QAM	1	49	22.81	22.93	22.89	22.96	23.00	22.81	22.93	22.89	22.96	23.00
20	16QAM	1	99	22.82	22.83	22.90	23.00	22.97	22.82	22.83	22.90	23.00	22.97
20	16QAM	50	0	21.98	22.05	21.98	22.03	22.13	21.98	22.05	21.98	22.03	22.13
20	16QAM	50	24	21.92	21.89	21.96	22.09	22.10	21.92	21.89	21.96	22.09	22.10
20	16QAM	50	50	21.90	21.87	21.94	22.06	22.04	21.90	21.87	21.94	22.06	22.04
20	16QAM	100	0	21.93	21.88	21.97	22.00	22.09	21.93	21.88	21.97	22.00	22.09
20	64QAM	1	0	21.73	21.77	21.76	21.79	21.89	21.73	21.77	21.76	21.79	21.89
20	64QAM	1	49	21.59	21.66	21.62	21.74	21.75	21.59	21.66	21.62	21.74	21.75
20	64QAM	1	99	21.58	21.58	21.65	21.75	21.70	21.58	21.58	21.65	21.75	21.70
20	64QAM	50	0	20.94	21.04	20.98	21.02	21.12	20.94	21.04	20.98	21.02	21.12
20	64QAM	50	24	20.91	20.87	20.94	21.07	21.08	20.91	20.87	20.94	21.07	21.08
20	64QAM	50	50	20.91	20.86	20.93	21.05	21.04	20.91	20.86	20.93	21.05	21.04
20	64QAM	100	0	20.90	20.88	20.96	20.98	21.04	20.90	20.88	20.96	20.98	21.04
Channel				39725	40173	40620	41068	41515	39725	40173	40620	41068	41515
Frequency (MHz)				2503.5	2548.3	2593	2637.8	2682.5	2503.5	2548.3	2593	2637.8	2682.5
15	QPSK	1	0	23.64	23.67	23.62	23.68	23.86	23.64	23.67	23.62	23.68	23.86
15	QPSK	1	37	23.59	23.69	23.53	23.68	23.68	23.59	23.69	23.53	23.68	23.68
15	QPSK	1	74	23.49	23.50	23.71	23.68	23.67	23.49	23.50	23.71	23.68	23.67
15	QPSK	36	0	22.80	22.76	22.78	22.76	22.90	22.80	22.76	22.78	22.76	22.90
15	QPSK	36	20	22.69	22.54	22.75	22.78	22.89	22.69	22.54	22.75	22.78	22.89
15	QPSK	36	39	22.67	22.62	22.64	22.76	22.66	22.67	22.62	22.64	22.76	22.66
15	QPSK	75	0	22.64	22.61	22.69	22.68	22.73	22.64	22.61	22.69	22.68	22.73
15	16QAM	1	0	22.70	22.87	22.87	22.88	22.98	22.70	22.87	22.87	22.88	22.98
15	16QAM	1	37	22.64	22.65	22.68	22.73	22.81	22.64	22.65	22.68	22.73	22.81
15	16QAM	1	74	22.58	22.64	22.80	22.77	22.79	22.58	22.64	22.80	22.77	22.79
15	16QAM	36	0	21.88	21.92	21.71	21.80	21.83	21.88	21.92	21.71	21.80	21.83
15	16QAM	36	20	21.68	21.69	21.86	21.94	21.89	21.68	21.69	21.86	21.94	21.89
15	16QAM	36	39	21.76	21.62	21.74	21.77	21.74	21.76	21.62	21.74	21.77	21.74
15	16QAM	75	0	21.73	21.75	21.85	21.89	21.86	21.73	21.75	21.85	21.89	21.86
15	64QAM	1	0	21.59	21.60	21.62	21.67	21.79	21.59	21.60	21.62	21.67	21.79
15	64QAM	1	37	21.37	21.45	21.39	21.60	21.50	21.37	21.45	21.39	21.60	21.50
15	64QAM	1	74	21.28	21.45	21.55	21.50	21.54	21.28	21.45	21.55	21.50	21.54
15	64QAM	36	0	20.83	20.79	20.79	20.76	20.90	20.83	20.79	20.79	20.76	20.90
15	64QAM	36	20	20.65	20.60	20.69	20.77	20.86	20.65	20.60	20.69	20.77	20.86
15	64QAM	36	39	20.71	20.57	20.74	20.92	20.76	20.71	20.57	20.74	20.92	20.76
15	64QAM	75	0	20.76	20.74	20.76	20.85	20.74	20.76	20.74	20.76	20.85	20.74
Channel				39700	40160	40620	41080	41540	39700	40160	40620	41080	41540
Frequency (MHz)				2501	2547	2593	2639	2685	2501	2547	2593	2639	2685
10	QPSK	1	0	23.59	23.82	23.80	23.69	23.76	23.59	23.82	23.80	23.69	23.76
10	QPSK	1	25	23.48	23.71	23.68	23.78	23.62	23.48	23.71	23.68	23.78	23.62
10	QPSK	1	49	23.54	23.46	23.55	23.70	23.72	23.54	23.46	23.55	23.70	23.72
10	QPSK	25	0	22.61	22.79	22.80	22.84	22.84	22.61	22.79	22.80	22.84	22.84
10	QPSK	25	12	22.67	22.69	22.75	22.85	22.79	22.67	22.69	22.75	22.85	22.79
10	QPSK	25	25	22.72	22.69	22.61	22.75	22.82	22.72	22.69	22.61	22.75	22.82
10	QPSK	50	0	22.65	22.54	22.76	22.73	22.87	22.65	22.54	22.76	22.73	22.87
10	16QAM	1	0	22.70	22.81	22.85	22.96	22.88	22.70	22.81	22.85	22.96	22.88
10	16QAM	1	25	22.65	22.83	22.65	22.80	22.80	22.65	22.83	22.65	22.80	22.80
10	16QAM	1	49	22.53	22.73	22.65	22.74	22.79	22.53	22.73	22.65	22.74	22.79
10	16QAM	25	0	21.87	21.82	21.83	21.81	21.88	21.87	21.82	21.83	21.81	21.88
10	16QAM	25	12	21.81	21.61	21.82	21.82	21.94	21.81	21.61	21.82	21.82	21.94
10	16QAM	25	25	21.73	21.77	21.81	21.79	21.85	21.73	21.77	21.81	21.79	21.85
10	16QAM	50	0	21.64	21.76	21.72	21.82	21.89	21.64	21.76	21.72	21.82	21.89
10	64QAM	1	0	21.56	21.59	21.52	21.53	21.72	21.56	21.59	21.52	21.53	21.72



FCC SAR TEST REPORT

Report No. : FA891148-06

10	64QAM	1	25	21.49	21.44	21.35	21.52	21.60	21.49	21.44	21.35	21.52	21.60
10	64QAM	1	49	21.45	21.35	21.37	21.65	21.50	21.45	21.35	21.37	21.65	21.50
10	64QAM	25	0	20.83	20.94	20.77	20.86	20.98	20.83	20.94	20.77	20.86	20.98
10	64QAM	25	12	20.64	20.72	20.69	20.89	20.79	20.64	20.72	20.69	20.89	20.79
10	64QAM	25	25	20.68	20.59	20.83	20.87	20.85	20.68	20.59	20.83	20.87	20.85
10	64QAM	50	0	20.63	20.72	20.66	20.82	20.80	20.63	20.72	20.66	20.82	20.80
Channel				39675	40148	40620	41093	41565	39675	40148	40620	41093	41565
Frequency (MHz)				2498.5	2545.8	2593	2640.30	2687.5	2498.5	2545.8	2593	2640.30	2687.5
5	QPSK	1	0	23.57	23.84	23.66	23.85	23.90	23.57	23.84	23.66	23.85	23.90
5	QPSK	1	12	23.51	23.56	23.55	23.77	23.71	23.51	23.56	23.55	23.77	23.71
5	QPSK	1	24	23.58	23.49	23.70	23.81	23.75	23.58	23.49	23.70	23.81	23.75
5	QPSK	12	0	22.81	22.83	22.63	22.88	22.89	22.81	22.83	22.63	22.88	22.89
5	QPSK	12	7	22.65	22.59	22.76	22.82	22.82	22.65	22.59	22.76	22.82	22.82
5	QPSK	12	13	22.59	22.63	22.69	22.80	22.68	22.59	22.63	22.69	22.80	22.68
5	QPSK	25	0	22.63	22.60	22.74	22.66	22.89	22.63	22.60	22.74	22.66	22.89
5	16QAM	1	0	22.78	22.86	22.78	22.89	22.89	22.78	22.86	22.78	22.89	22.89
5	16QAM	1	12	22.51	22.74	22.67	22.81	22.79	22.51	22.74	22.67	22.81	22.79
5	16QAM	1	24	22.65	22.67	22.60	22.84	22.81	22.65	22.67	22.60	22.84	22.81
5	16QAM	12	0	21.80	21.93	21.76	21.88	21.99	21.80	21.93	21.76	21.88	21.99
5	16QAM	12	7	21.76	21.59	21.68	21.87	21.95	21.76	21.59	21.68	21.87	21.95
5	16QAM	12	13	21.61	21.65	21.76	21.79	21.86	21.61	21.65	21.76	21.79	21.86
5	16QAM	25	0	21.64	21.66	21.67	21.87	21.85	21.64	21.66	21.67	21.87	21.85
5	64QAM	1	0	21.51	21.48	21.59	21.59	21.63	21.51	21.48	21.59	21.59	21.63
5	64QAM	1	12	21.38	21.53	21.50	21.55	21.53	21.38	21.53	21.50	21.55	21.53
5	64QAM	1	24	21.39	21.36	21.45	21.60	21.49	21.39	21.36	21.45	21.60	21.49
5	64QAM	12	0	20.70	20.83	20.74	20.85	21.01	20.70	20.83	20.74	20.85	21.01
5	64QAM	12	7	20.79	20.59	20.64	20.97	20.91	20.79	20.59	20.64	20.97	20.91
5	64QAM	12	13	20.72	20.73	20.73	20.92	20.84	20.72	20.73	20.73	20.92	20.84
5	64QAM	25	0	20.64	20.63	20.66	20.87	20.89	20.64	20.63	20.66	20.87	20.89



<WiFi on>

Power Selection				Head					Hotspot / Body-worn				
Transmit Antenna				Ant 2					Ant 2				
Max. Power				23					20.5				
BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Low Middle Ch. / Freq.	Power Middle Ch. / Freq.	Power High Middle Ch. / Freq.	Power High Ch. / Freq.	Power Low Ch. / Freq.	Power Low Middle Ch. / Freq.	Power Middle Ch. / Freq.	Power High Middle Ch. / Freq.	Power High Ch. / Freq.
Channel				39750	40185	40620	41055	41490	39750	40185	40620	41055	41490
Frequency (MHz)				2506	2549.5	2593	2636.5	2680	2506	2549.5	2593	2636.5	2680
20	QPSK	1	0	22.24	22.31	22.30	22.34	22.42	19.61	19.61	19.67	19.65	19.70
20	QPSK	1	49	22.11	22.23	22.15	22.29	22.28	19.47	19.46	19.55	19.45	19.53
20	QPSK	1	99	22.18	22.14	22.04	22.32	22.25	19.52	19.52	19.48	19.58	19.53
20	QPSK	50	0	22.27	22.33	22.29	22.38	22.40	19.61	19.57	19.65	19.62	19.68
20	QPSK	50	24	22.24	22.18	22.25	22.36	22.38	19.55	19.57	19.53	19.45	19.63
20	QPSK	50	50	22.22	22.18	21.95	22.32	22.31	19.52	19.54	19.52	19.48	19.50
20	QPSK	100	0	22.24	22.22	22.27	22.28	22.35	19.55	19.55	19.54	19.60	19.62
20	16QAM	1	0	22.16	22.25	22.01	22.24	22.28	19.58	19.56	19.53	19.49	19.51
20	16QAM	1	49	22.04	22.12	22.04	22.21	22.23	19.44	19.43	19.52	19.34	19.50
20	16QAM	1	99	22.05	22.01	21.91	22.22	22.14	19.43	19.47	19.41	19.51	19.40
20	16QAM	50	0	22.11	22.20	21.72	22.18	22.28	19.53	19.52	19.59	19.43	19.50
20	16QAM	50	24	22.11	22.07	22.15	22.25	22.25	19.51	19.49	19.47	19.51	19.39
20	16QAM	50	50	22.07	22.05	21.55	22.25	22.19	19.47	19.46	19.46	19.46	19.54
20	16QAM	100	0	22.10	22.07	21.57	22.15	22.24	19.52	19.48	19.47	19.43	19.43
20	64QAM	1	0	21.89	21.95	21.58	21.95	22.05	19.34	19.31	19.38	19.30	19.35
20	64QAM	1	49	21.75	21.84	21.60	21.92	21.92	19.15	19.17	19.24	19.20	19.26
20	64QAM	1	99	21.77	21.79	21.65	21.92	21.88	19.21	19.19	19.19	19.31	19.11
20	64QAM	50	0	21.31	21.37	22.16	21.37	21.36	19.55	19.57	19.51	19.53	19.55
20	64QAM	50	24	21.27	21.25	21.76	21.45	21.42	19.53	19.52	19.47	19.51	19.52
20	64QAM	50	50	21.23	21.24	21.93	21.40	21.35	19.48	19.47	19.45	19.41	19.45
20	64QAM	100	0	21.28	21.26	21.32	21.36	21.41	19.54	19.52	19.47	19.48	19.51
Channel				39725	40173	40620	41068	41515	39725	40173	40620	41068	41515
Frequency (MHz)				2503.5	2548.3	2593	2637.8	2682.5	2503.5	2548.3	2593	2637.8	2682.5
15	QPSK	1	0	22.22	22.28	22.30	22.34	22.37	19.58	19.41	19.54	19.45	19.57
15	QPSK	1	37	21.96	22.12	22.07	22.24	22.10	19.35	19.42	19.38	19.31	19.51
15	QPSK	1	74	22.13	21.98	21.92	22.14	22.11	19.46	19.38	19.29	19.40	19.45
15	QPSK	36	0	22.25	22.33	22.14	22.35	22.35	19.54	19.48	19.62	19.45	19.58
15	QPSK	36	20	22.24	22.17	22.14	22.22	22.34	19.49	19.48	19.41	19.39	19.48
15	QPSK	36	39	22.19	22.04	21.92	22.21	22.18	19.52	19.48	19.51	19.41	19.41
15	QPSK	75	0	22.22	22.09	22.15	22.09	22.30	19.39	19.40	19.42	19.48	19.54
15	16QAM	1	0	22.10	22.08	21.89	22.06	22.26	19.51	19.56	19.51	19.47	19.31
15	16QAM	1	37	21.93	22.08	22.04	22.08	22.07	19.27	19.26	19.40	19.32	19.32
15	16QAM	1	74	21.86	21.84	21.91	22.12	22.02	19.27	19.40	19.33	19.51	19.39
15	16QAM	36	0	22.02	22.12	21.72	22.11	22.25	19.43	19.37	19.48	19.24	19.31
15	16QAM	36	20	22.06	21.89	22.05	22.05	22.12	19.50	19.42	19.34	19.47	19.36
15	16QAM	36	39	21.92	21.88	21.36	22.20	22.02	19.33	19.41	19.29	19.38	19.52
15	16QAM	75	0	21.90	21.91	21.54	22.14	22.20	19.41	19.48	19.33	19.35	19.29
15	64QAM	1	0	21.79	21.77	21.46	21.83	21.87	19.27	19.19	19.27	19.28	19.20
15	64QAM	1	37	21.66	21.66	21.48	21.82	21.77	19.02	19.16	19.22	19.17	19.26
15	64QAM	1	74	21.57	21.64	21.55	21.92	21.76	19.09	19.15	19.04	19.11	18.99
15	64QAM	36	0	21.16	21.36	22.14	21.32	21.18	19.41	19.38	19.41	19.50	19.52
15	64QAM	36	20	21.09	21.05	21.66	21.31	21.39	19.51	19.50	19.36	19.34	19.47
15	64QAM	36	39	21.14	21.19	21.92	21.33	21.18	19.48	19.27	19.38	19.25	19.34
15	64QAM	75	0	21.12	21.25	21.29	21.26	21.39	19.38	19.33	19.36	19.39	19.34
Channel				39700	40160	40620	41080	41540	39700	40160	40620	41080	41540
Frequency (MHz)				2501	2547	2593	2639	2685	2501	2547	2593	2639	2685
10	QPSK	1	0	22.08	22.27	22.17	22.23	22.24	19.50	19.43	19.64	19.53	19.51
10	QPSK	1	25	21.93	22.21	22.08	22.10	22.17	19.34	19.28	19.48	19.36	19.50
10	QPSK	1	49	22.05	22.10	22.02	22.29	22.23	19.45	19.37	19.47	19.40	19.36
10	QPSK	25	0	22.09	22.32	22.15	22.19	22.29	19.44	19.57	19.46	19.57	19.55
10	QPSK	25	12	22.14	21.98	22.07	22.35	22.21	19.35	19.46	19.34	19.32	19.62
10	QPSK	25	25	22.14	21.98	21.89	22.13	22.27	19.49	19.35	19.51	19.35	19.49
10	QPSK	50	0	22.06	22.20	22.19	22.24	22.23	19.55	19.45	19.53	19.43	19.56
10	16QAM	1	0	22.12	22.18	21.89	22.14	22.24	19.45	19.40	19.44	19.48	19.33
10	16QAM	1	25	21.84	21.93	21.89	22.12	22.14	19.35	19.23	19.44	19.29	19.33
10	16QAM	1	49	21.99	21.96	21.91	22.13	21.95	19.34	19.42	19.34	19.40	19.28
10	16QAM	25	0	22.03	22.05	21.63	22.15	22.10	19.49	19.34	19.40	19.39	19.40
10	16QAM	25	12	22.09	21.90	22.15	22.13	22.18	19.47	19.43	19.27	19.40	19.26
10	16QAM	25	25	22.00	22.00	21.38	22.05	22.08	19.46	19.35	19.38	19.31	19.50
10	16QAM	50	0	21.95	22.06	21.53	22.11	22.20	19.51	19.28	19.37	19.24	19.23
10	64QAM	1	0	21.77	21.78	21.53	21.76	21.88	19.26	19.24	19.31	19.13	19.22
10	64QAM	1	25	21.59	21.66	21.46	21.75	21.78	19.05	19.05	19.14	19.03	19.24
10	64QAM	1	49	21.62	21.67	21.51	21.77	21.86	19.12	19.13	19.10	19.23	19.00



FCC SAR TEST REPORT

Report No. : FA891148-06

10	64QAM	25	0	21.15	21.21	22.07	21.17	21.33	19.38	19.37	19.45	19.45	19.40
10	64QAM	25	12	21.16	21.10	21.65	21.26	21.27	19.48	19.44	19.38	19.38	19.40
10	64QAM	25	25	21.22	21.04	21.91	21.27	21.21	19.31	19.30	19.38	19.23	19.37
10	64QAM	50	0	21.17	21.22	21.13	21.34	21.36	19.54	19.36	19.35	19.28	19.35
Channel				39675	40148	40620	41093	41565	39675	40148	40620	41093	41565
Frequency (MHz)				2498.5	2545.8	2593	2640.30	2687.5	2498.5	2545.8	2593	2640.30	2687.5
5	QPSK	1	0	22.20	22.29	22.18	22.27	22.23	19.48	19.44	19.59	19.51	19.56
5	QPSK	1	12	21.94	22.06	22.03	22.15	22.13	19.30	19.38	19.49	19.41	19.40
5	QPSK	1	24	22.03	21.97	21.93	22.25	22.05	19.47	19.47	19.29	19.41	19.47
5	QPSK	12	0	22.19	22.29	22.17	22.18	22.23	19.50	19.49	19.60	19.60	19.64
5	QPSK	12	7	22.12	22.03	22.14	22.29	22.37	19.46	19.46	19.41	19.40	19.62
5	QPSK	12	13	22.09	22.06	21.90	22.22	22.17	19.35	19.43	19.38	19.43	19.50
5	QPSK	25	0	22.23	22.10	22.26	22.10	22.19	19.52	19.55	19.42	19.52	19.62
5	16QAM	1	0	22.04	22.24	21.95	22.06	22.17	19.48	19.46	19.35	19.31	19.50
5	16QAM	1	12	22.01	21.97	21.97	22.21	22.20	19.41	19.34	19.50	19.29	19.47
5	16QAM	1	24	21.97	21.82	21.80	22.19	22.12	19.43	19.39	19.32	19.48	19.31
5	16QAM	12	0	22.09	22.10	21.64	22.00	22.14	19.41	19.51	19.40	19.36	19.40
5	16QAM	12	7	21.91	22.04	21.98	22.20	22.08	19.49	19.32	19.28	19.36	19.25
5	16QAM	12	13	21.99	22.01	21.47	22.09	22.17	19.27	19.34	19.40	19.45	19.52
5	16QAM	25	0	22.06	21.95	21.38	22.05	22.09	19.51	19.47	19.41	19.40	19.31
5	64QAM	1	0	21.79	21.92	21.41	21.79	21.89	19.17	19.14	19.21	19.26	19.30
5	64QAM	1	12	21.74	21.79	21.44	21.76	21.82	18.96	19.03	19.04	19.06	19.18
5	64QAM	1	24	21.58	21.71	21.53	21.87	21.73	19.06	19.07	19.13	19.28	18.91
5	64QAM	12	0	21.23	21.24	22.12	21.20	21.33	19.47	19.47	19.47	19.51	19.41
5	64QAM	12	7	21.22	21.18	21.59	21.25	21.40	19.49	19.38	19.28	19.49	19.50
5	64QAM	12	13	21.18	21.12	21.75	21.37	21.22	19.44	19.41	19.32	19.27	19.28
5	64QAM	25	0	21.12	21.22	21.30	21.34	21.30	19.45	19.37	19.30	19.34	19.42

12. LTE Carrier Aggregation combinations

General Note:

1. This device supports Carrier Aggregation on downlink only for inter and intra band, Uplink CA is not supported. For the device supports combination bands and configurations are according to 3GPP.
2. In applying the existing power measurement procedure of KDB 941225 D05A for DL CA SAR test exclusion, only the subset with the largest number of combinations of the frequency band and CCs in each row need consideration, and that configurations require power measurement should be highlighted in the below table.

2CC Downlink Carrier Aggregation				3CC Downlink Carrier Aggregation			
Number	Combination	Restriction	Covered by	Number	Combination	Restriction	Covered by
			Measurement Superset				Measurement Superset
1	CA_41A-41A		3CC-1	1	CA_41A-41C		
2	CA_41C						

<Power verification when LTE Carrier Aggregation Active>

General Note:

- i. According to KDB941225 D05A v01r02, Uplink maximum output power measurement with downlink carrier aggregation active should be measured, using the highest output channel measured without downlink carrier aggregation, to confirm that uplink maximum output power with downlink carrier aggregation active remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output measured without downlink carrier aggregation active.
- ii. Uplink maximum output power with downlink carrier aggregation active does not show more than ¼ dB higher than the maximum output power without downlink carrier aggregation active, therefore SAR evaluation with downlink carrier aggregation active can be excluded.
- iii. The device supports downlink two carrier aggregation. For power measurement were control and acknowledge data is sent on uplink channels that operate identical to specifications when downlink carrier aggregation is inactive.
- iv. Selected highest measured power when downlink carrier aggregation is inactive for conducted power comparison with downlink carrier aggregation is active, to confirm that when downlink carrier aggregation is active uplink maximum output power remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output power measured when downlink carrier aggregation inactive.
- v. For non-contiguous intra-band CA, the SCC selected to provide maximum separation from the PCC and must remain fully within the downlink transmission band.
- vi. For Intra-band, contiguous CA, the downlink channels selected to perform the uplink power measurement must satisfy 3GPP channel spacing (5.4.1A of 3GPP TS 36.521 or equivalent) and channel bandwidth (5.4.2A) requirements.

$$\text{Nominal channel spacing} = \left\lceil \frac{BW_{\text{Channel}(1)} + BW_{\text{Channel}(2)} - 0.1|BW_{\text{Channel}(1)} - BW_{\text{Channel}(2)}|}{0.6} \right\rceil 0.3 \text{ [MHz]}$$

<Two Carrier power verification>

Configure		PCC							SCC				Power	
		LTE Band	BW (MHz)	UL Freq. (MHz)	UL Channel	Mod.	UL# RB	UL RB Offset	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	With CA Tx.Power (dBm)	W/O CA Tx.Power (dBm)
Intra-Band	Contiguous	41	20	2680	41490	QPSK	1	0	41	20	2660.20	41292	23.95	24.05

<Three Carrier power verification>

Configure		PCC							SCC1				SCC2				Power	
		LTE Band	BW (MHz)	UL Freq. (MHz)	UL Channel	Mod.	UL# RB	UL RB Offset	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	With CA Tx.Power (dBm)	W/O CA Tx.Power (dBm)
Intra-Band	Contiguous	41	20	2680	41490	QPSK	1	0	41	5	2498.5	39675	41	20	2510.2	39792	23.99	24.05



13. WLAN Conducted RF Output Power (Unit: dBm)

<WLAN Conducted Power>

General Note:

1. Per KDB 248227 D01v02r02, the simultaneous SAR provisions in KDB publication 447498 should be applied to determine simultaneous transmission SAR test exclusion for WiFi MIMO. If the sum of 1g single transmission chain SAR measurements is $< 1.6\text{W/kg}$ and SAR peak to location ratio ≤ 0.04 , no additional SAR measurements for MIMO.
2. Per KDB 248227 D01v02r02, SAR test reduction is determined according to 802.11 transmission mode configurations and certain exposure conditions with multiple test positions. In the 2.4 GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements. For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration must be determined for each standalone and aggregated frequency band, according to the transmission mode configuration with the highest maximum output power specified for production units to perform SAR measurements. If the same highest maximum output power applies to different combinations of channel bandwidths, modulations and data rates, additional procedures are applied to determine which test configurations require SAR measurement. When applicable, an initial test position may be applied to reduce the number of SAR measurements required for next to the ear, UMPC mini-tablet or hotspot mode configurations with multiple test positions.
3. For 2.4 GHz 802.11b DSSS, either the initial test position procedure for multiple exposure test positions or the DSSS procedure for fixed exposure position is applied; these are mutually exclusive. For 2.4 GHz and 5 GHz OFDM configurations, the initial test configuration is applied to measure SAR using either the initial test position procedure for multiple exposure test position configurations or the initial test configuration procedures for fixed exposure test conditions. Based on the reported SAR of the measured configurations and maximum output power of the transmission mode configurations that are not included in the initial test configuration, the subsequent test configuration and initial test position procedures are applied to determine if SAR measurements are required for the remaining OFDM transmission configurations. In general, the number of test channels that require SAR measurement is minimized based on maximum output power measured for the test sample(s).
4. For OFDM transmission configurations in the 2.4 GHz and 5 GHz bands, When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel for each frequency band.
5. DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures.18 The initial test position procedure is described in the following:
 - a. When the reported SAR of the initial test position is $\leq 0.4\text{ W/kg}$, further SAR measurement is not required for the other test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band.
 - b. When the reported SAR of the test position is $> 0.4\text{ W/kg}$, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is $\leq 0.8\text{ W/kg}$ or all required test position are tested.
 - c. For all positions/configurations, when the reported SAR is $> 0.8\text{ W/kg}$, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is $\leq 1.2\text{ W/kg}$ or all required channels are tested.



<2.4GHz WLAN>

Power Selection				Head			Head			Head						
Transmit Antenna				Ant 4			Ant 5			Ant 4+5						
2.4GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Ant 4 Average power (dBm)	Ant 4 Tune-Up Limit	Ant 5 Average power (dBm)	Ant 5 Tune-Up Limit	Ant 4+5 Average power (dBm)	Ant 4+5 Tune-Up Limit	Duty Cycle %
	2.4GHz WLAN	802.11b 1Mbps	1	2412	14.40	14.50	99.20	14.10	14.50	99.20	14.40	14.50	14.10	14.50	17.26	17.50
6			2437	14.30	14.50	14.40		14.50	14.10		14.50	13.90	14.50	17.01	17.50	
11			2462	14.40	14.50	14.10		14.50	14.40		14.50	14.00	14.50	17.21	17.50	
12			2467	14.00	14.50	14.40		14.50	14.50		14.50	13.90	14.50	17.22	17.50	
13			2472	12.90	13.00	12.90		13.00	12.70		13.00	12.70	13.00	15.70	16.00	
802.11g 6Mbps		1	2412	14.10	14.50	98.10	14.10	14.50	98.10	14.40	14.50	14.30	14.50	17.36	17.50	98.10
		6	2437	14.40	14.50		14.20	14.50		14.40	14.50	14.20	14.50	17.31	17.50	
		11	2462	14.20	14.50		14.40	14.50		14.50	14.50	14.30	14.50	17.46	17.50	
		12	2467	10.30	10.50		10.48	10.50		9.80	10.50	9.70	10.50	12.70	13.50	
		13	2472	-5.10	-5.00		-5.10	-5.00		-5.20	-5.00	-5.10	-5.00	-2.10	-2.00	
802.11n-HT20 MCS0		1	2412	14.40	14.50	97.97	14.10	14.50	97.97	14.30	14.50	14.20	14.50	17.26	17.50	97.97
		6	2437	14.40	14.50		14.10	14.50		14.30	14.50	14.10	14.50	17.21	17.50	
		11	2462	14.20	14.50		14.30	14.50		14.50	14.50	14.30	14.50	17.40	17.50	
		12	2467	14.20	14.50		14.30	14.50		14.50	14.50	14.20	14.50	17.40	17.50	
		13	2472	-4.20	-4.00		-4.10	-4.00		-4.10	-4.00	-4.20	-4.00	-1.00	-1.00	

Power Selection				Hotspot / Body-worn / Product Specific			Hotspot / Body-worn / Product Specific			Hotspot / Body-worn / Product Specific						
Transmit Antenna				Ant 4			Ant 5			Ant 4+5						
2.4GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Ant 4 Average power (dBm)	Ant 4 Tune-Up Limit	Ant 5 Average power (dBm)	Ant 5 Tune-Up Limit	Ant 4+5 Average power (dBm)	Ant 4+5 Tune-Up Limit	Duty Cycle %
	2.4GHz WLAN	802.11b 1Mbps	1	2412	17.90	18.00	99.20	17.70	18.00	99.20	17.90	18.00	18.00	18.00	20.96	21.00
6			2437	17.90	18.00	17.80		18.00	17.90		18.00	17.60	18.00	20.76	21.00	
11			2462	15.90	16.50	15.80		16.50	16.40		16.50	16.00	16.50	19.24	19.50	
12			2467	15.80	16.00	15.90		16.00	15.58		16.00	15.42	16.00	18.51	19.00	
13			2472	12.90	13.00	12.80		13.00	12.80		13.00	12.40	13.00	15.56	16.00	
802.11g 6Mbps		1	2412	17.90	18.00	98.10	17.90	18.00	98.10	17.50	18.00	17.80	18.00	20.66	21.00	98.10
		6	2437	17.90	18.00		17.80	18.00		17.90	18.00	18.00	18.00	20.96	21.00	
		11	2462	16.40	16.50		15.90	16.50		16.40	16.50	16.00	16.50	19.24	19.50	
		12	2467	10.20	10.50		10.01	10.50		10.40	10.50	10.00	10.50	13.22	13.50	
		13	2472	-5.40	-5.00		-5.10	-5.00		-5.40	-5.00	-5.80	-5.00	-2.60	-2.00	
802.11n-HT20 MCS0		1	2412	17.90	18.00	97.97	17.80	18.00	97.97	17.60	18.00	17.80	18.00	20.71	21.00	97.97
		6	2437	17.90	18.00		17.80	18.00		17.80	18.00	18.00	18.00	20.91	21.00	
		11	2462	15.40	15.50		14.90	15.50		15.40	15.50	15.00	15.50	18.26	18.50	
		12	2467	14.20	14.50		14.20	14.50		14.20	14.50	14.10	14.50	17.16	17.50	
		13	2472	-5.10	-4.00		-5.20	-4.00		-4.10	-4.00	-4.20	-4.00	-1.10	-1.00	



<5GHz WLAN>

Power Selection				Head			Head			Head						
Transmit Antenna				Ant 4			Ant 5			Ant 4+5						
5.2GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Ant 4 Average power (dBm)	Ant 4 Tune-Up Limit	Ant 5 Average power (dBm)	Ant 5 Tune-Up Limit	Ant 4+5 Average power (dBm)	Ant 4+5 Tune-Up Limit	Duty Cycle %
	5.2GHz WLAN	802.11a 6Mbps	36	5180	12.40	12.50	98.11	12.20	12.50	98.11	12.50	12.50	12.10	12.50	15.30	15.50
40			5200	12.30	12.50	12.30		12.50	12.30		12.50	15.30	15.50			
44			5220	12.30	12.50	12.20		12.50	12.10		12.50	15.10	15.50			
48			5240	12.10	12.50	12.40		12.50	12.40		12.50	15.07	15.50			
802.11n-HT20 MCS0		36	5180	12.40	12.50	98.22	12.20	12.50	98.22	12.40	12.50	12.20	12.50	15.47	15.50	98.22
		40	5200	12.30	12.50		12.40	12.50		12.40	12.50	15.40	15.50			
		44	5220	12.20	12.50		12.10	12.50		12.50	12.50	15.31	15.50			
		48	5240	12.40	12.50		12.30	12.50		12.20	12.50	15.47	15.50			
802.11n-HT40 MCS0		38	5190	12.20	12.50	96.46	12.20	12.50	96.45	12.30	12.50	12.00	12.50	15.32	15.50	96.45
		46	5230	12.10	12.50		12.40	12.50		12.40	12.50	15.17	15.50			
802.11ac-VHT20 MCS0		36	5180	12.30	12.50	98.23	12.20	12.50	98.23	12.40	12.50	12.20	12.50	15.47	15.50	98.23
		40	5200	12.30	12.50		12.40	12.50		12.50	12.50	15.50	15.50			
	44	5220	12.20	12.50	12.10		12.50	12.50		12.50	15.36	15.50				
	48	5240	12.40	12.50	12.20		12.50	12.20		12.50	15.47	15.50				
802.11ac-VHT40 MCS0	38	5190	12.20	12.50	96.45	12.20	12.50	96.45	12.40	12.50	12.10	12.50	15.37	15.50	96.45	
	46	5230	12.10	12.50		12.10	12.50		12.50	12.50	15.17	15.50				
802.11ac-VHT80 MCS0	42	5210	12.30	12.50	92.00	12.10	12.50	92.00	12.40	12.50	12.10	12.50	15.37	15.50	92.00	

Power Selection				Hotspot / Body-worn / Product Specific			Hotspot / Body-worn / Product Specific			Hotspot / Body-worn / Product Specific						
Transmit Antenna				Ant 4			Ant 5			Ant 4+5						
5.2GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Ant 4 Average power (dBm)	Ant 4 Tune-Up Limit	Ant 5 Average power (dBm)	Ant 5 Tune-Up Limit	Ant 4+5 Average power (dBm)	Ant 4+5 Tune-Up Limit	Duty Cycle %
	5.2GHz WLAN	802.11a 6Mbps	36	5180	17.40	17.50	98.11	17.40	17.50	98.11	17.50	17.50	17.10	17.50	20.32	20.50
40			5200	17.40	17.50	17.40		17.50	17.48		17.50	17.08	17.50	20.27	20.50	
44			5220	17.20	17.50	17.20		17.50	17.40		17.50	16.80	17.50	20.12	20.50	
48			5240	17.40	17.50	17.40		17.50	17.50		17.50	17.00	17.50	20.43	20.50	
802.11n-HT20 MCS0		36	5180	17.20	17.50	98.22	17.30	17.50	98.22	17.50	17.50	17.10	17.50	20.31	20.50	98.22
		40	5200	17.40	17.50		17.30	17.50		17.50	17.50	17.10	17.50	20.31	20.50	
		44	5220	17.10	17.50		17.10	17.50		17.30	17.50	16.80	17.50	20.07	20.50	
		48	5240	17.40	17.50		16.90	17.50		17.40	17.50	17.00	17.50	20.21	20.50	
802.11n-HT40 MCS0		38	5190	12.20	12.50	96.46	12.40	12.50	96.45	12.50	12.50	11.90	12.50	15.22	15.50	96.45
		46	5230	17.40	17.50		17.30	17.50		17.50	17.50	16.90	17.50	20.33	20.50	
802.11ac-VHT20 MCS0		36	5180	17.20	17.50	98.23	17.20	17.50	98.23	17.40	17.50	17.10	17.50	20.26	20.50	98.23
		40	5200	17.40	17.50		17.40	17.50		17.50	17.50	17.10	17.50	20.41	20.50	
	44	5220	17.40	17.50	17.40		17.50	17.50		17.50	17.40	17.50	20.46	20.50		
	48	5240	17.30	17.50	17.10		17.50	17.40		17.50	17.00	17.50	20.21	20.50		
802.11ac-VHT40 MCS0	38	5190	12.30	12.50	96.45	12.20	12.50	96.45	12.40	12.50	12.10	12.50	15.42	15.50	96.45	
	46	5230	17.40	17.50		17.40	17.50		17.40	17.50	16.80	17.50	20.12	20.50		
802.11ac-VHT80 MCS0	42	5210	12.30	12.50	92.00	12.20	12.50	92.00	12.30	12.50	12.10	12.50	15.42	15.50	92.00	



Power Selection				Head			Head			Head						
Transmit Antenna				Ant 4			Ant 5			Ant 4+5						
5.3GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Ant 4 Average power (dBm)	Ant 4 Tune-Up Limit	Ant 5 Average power (dBm)	Ant 5 Tune-Up Limit	Ant 4+5 Average power (dBm)	Ant 4+5 Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps		52	5260	12.40	12.50	98.11	12.20	12.50	98.11	12.30	12.50	11.90	12.50	15.11	15.50
56			5280	12.10	12.50	12.30		12.50	11.90		12.50	15.11	15.50			
60			5300	12.40	12.50	12.10		12.50	12.30		12.50	15.46	15.50			
64			5320	12.30	12.50	12.40		12.50	12.20		12.50	15.41	15.50			
802.11n-HT20 MCS0		52	5260	12.40	12.50	98.22	12.10	12.50	98.22	12.30	12.50	12.00	12.50	15.16	15.50	98.22
		56	5280	12.40	12.50		12.30	12.50		11.90	12.50	15.11	15.50			
		60	5300	12.20	12.50		12.40	12.50		12.10	12.50	15.06	15.50			
		64	5320	12.20	12.50		12.30	12.50		12.30	12.50	15.46	15.50			
802.11n-HT40 MCS0		54	5270	12.30	12.50	96.46	12.40	12.50	96.45	12.40	12.50	12.30	12.50	15.46	15.50	96.45
		62	5310	12.10	12.50		12.30	12.50		12.10	12.50	15.26	15.50			
802.11ac-VHT20 MCS0		52	5260	12.40	12.50	98.23	12.10	12.50	98.23	12.30	12.50	12.00	12.50	15.16	15.50	98.23
		56	5280	12.40	12.50		12.40	12.50		11.90	12.50	15.11	15.50			
		60	5300	12.30	12.50		12.10	12.50		12.50	12.50	15.36	15.50			
		64	5320	12.30	12.50		12.40	12.50		12.20	12.50	15.41	15.50			
802.11ac-VHT40 MCS0		54	5270	12.30	12.50	96.45	12.40	12.50	96.45	12.40	12.50	12.30	12.50	15.46	15.50	96.45
		62	5310	12.40	12.50		12.30	12.50		12.20	12.50	15.31	15.50			
802.11ac-VHT80 MCS0		58	5290	12.30	12.50	92.00	12.10	12.50	92.00	12.50	12.50	12.40	12.50	15.46	15.50	92.00

Power Selection				Hotspot / Body-worn / Product Specific			Hotspot / Body-worn / Product Specific			Hotspot / Body-worn / Product Specific						
Transmit Antenna				Ant 4			Ant 5			Ant 4+5						
5.3GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Ant 4 Average power (dBm)	Ant 4 Tune-Up Limit	Ant 5 Average power (dBm)	Ant 5 Tune-Up Limit	Ant 4+5 Average power (dBm)	Ant 4+5 Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps		52	5260	17.30	17.50	98.11	17.10	17.50	98.11	17.20	17.50	16.80	17.50	20.01	20.50
56			5280	17.40	17.50	17.20		17.50	17.30		17.50	17.50	20.37	20.50		
60			5300	17.20	17.50	17.00		17.50	17.40		17.50	17.10	17.50	20.26	20.50	
64			5320	17.20	17.50	17.30		17.50	17.40		17.50	17.10	17.50	20.26	20.50	
802.11n-HT20 MCS0		52	5260	17.30	17.50	98.22	17.10	17.50	98.22	17.50	17.50	17.20	17.50	20.36	20.50	98.22
		56	5280	17.40	17.50		17.10	17.50		17.20	17.50	17.50	20.29	20.50		
		60	5300	17.20	17.50		17.10	17.50		17.30	17.50	17.10	17.50	20.21	20.50	
		64	5320	17.20	17.50		17.30	17.50		17.30	17.50	17.20	17.50	20.26	20.50	
802.11n-HT40 MCS0		54	5270	17.20	17.50	96.46	17.30	17.50	96.45	17.30	17.50	17.00	17.50	20.16	20.50	96.45
		62	5310	13.90	14.00		13.20	14.00		13.70	14.00	13.50	14.00	16.61	17.00	
802.11ac-VHT20 MCS0		52	5260	17.30	17.50	98.23	17.40	17.50	98.23	17.30	17.50	17.20	17.50	20.26	20.50	98.23
		56	5280	17.40	17.50		17.40	17.50		17.30	17.50	17.50	20.37	20.50		
		60	5300	17.40	17.50		17.20	17.50		17.30	17.50	17.10	17.50	20.21	20.50	
		64	5320	17.40	17.50		17.10	17.50		17.20	17.50	17.00	17.50	20.11	20.50	
802.11ac-VHT40 MCS0		54	5270	17.30	17.50	96.45	17.40	17.50	96.45	17.50	17.50	17.20	17.50	20.36	20.50	96.45
		62	5310	13.90	14.00		13.90	14.00		13.80	14.00	13.70	14.00	16.76	17.00	
802.11ac-VHT80 MCS0		58	5290	12.40	12.50	92.00	12.30	12.50	92.00	12.40	12.50	12.40	12.50	15.32	15.50	92.00



Power Selection				Head			Head			Head						
Transmit Antenna				Ant 4			Ant 5			Ant 4+5						
5.5GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Ant 4 Average power (dBm)	Ant 4 Tune-Up Limit	Ant 5 Average power (dBm)	Ant 5 Tune-Up Limit	Ant 4+5 Average power (dBm)	Ant 4+5 Tune-Up Limit	Duty Cycle %
	5.5GHz WLAN	802.11a 6Mbps	100	5500	10.40	10.50	98.11	10.10	10.50	98.11	10.20	10.50	9.90	10.50	13.01	13.50
116			5580	10.20	10.50	10.20		10.50	10.00		10.50	13.01	13.50			
124			5620	10.10	10.50	10.20		10.50	10.40		10.50	13.42	13.50			
132			5660	10.10	10.50	10.40		10.50	10.20		10.50	13.01	13.50			
144			5720	10.30	10.50	10.40		10.50	10.20		10.50	9.40	10.50	12.79	13.50	
802.11n-HT20 MCS0		100	5500	10.30	10.50	98.22	10.10	10.50	98.22	10.10	10.50	10.00	10.50	13.01	13.50	98.22
		116	5580	10.20	10.50		10.20	10.50		10.00	10.50	13.22	13.50			
		124	5620	10.10	10.50		10.10	10.50		10.20	10.50	13.22	13.50			
		132	5660	10.10	10.50		10.40	10.50		10.30	10.50	13.42	13.50			
		144	5720	10.20	10.50		10.40	10.50		10.50	10.50	9.90	10.50	13.22	13.50	
802.11n-HT40 MCS0		102	5510	10.10	10.50	96.46	10.30	10.50	96.45	10.30	10.50	10.10	10.50	13.22	13.50	96.45
		110	5550	10.40	10.50		10.40	10.50		10.20	10.50	13.01	13.50			
		126	5630	10.40	10.50		10.30	10.50		10.30	10.50	13.42	13.50			
		134	5670	10.30	10.50		10.40	10.50		10.40	10.50	13.42	13.50			
		142	5710	10.40	10.50		10.40	10.50		10.40	10.50	10.20	10.50	13.22	13.50	
802.11ac-VHT20 MCS0		100	5500	10.30	10.50	98.23	10.10	10.50	98.23	10.40	10.50	10.40	10.50	13.42	13.50	98.23
		116	5580	10.10	10.50		10.20	10.50		10.30	10.50	13.42	13.50			
		124	5620	10.10	10.50		10.20	10.50		10.20	10.50	13.22	13.50			
		132	5660	10.10	10.50		10.40	10.50		10.30	10.50	13.42	13.50			
		144	5720	10.20	10.50		10.40	10.50		10.50	10.50	10.40	10.50	13.42	13.50	
802.11ac-VHT40 MCS0	102	5510	10.10	10.50	96.45	10.10	10.50	96.45	10.40	10.50	10.10	10.50	13.22	13.50	96.45	
	110	5550	10.40	10.50		10.40	10.50		10.40	10.50	13.22	13.50				
	126	5630	10.30	10.50		10.40	10.50		10.20	10.50	13.01	13.50				
	134	5670	10.30	10.50		10.40	10.50		10.50	10.50	13.42	13.50				
	142	5710	10.40	10.50		10.40	10.50		10.50	10.50	10.20	10.50	13.22	13.50		
802.11ac-VHT80 MCS0	106	5530	10.10	10.50	92.00	10.40	10.50	92.00	10.40	10.50	9.80	10.50	13.22	13.50	92.00	
	122	5610	10.10	10.50		10.40	10.50		10.40	10.50	9.70	10.50	13.01	13.50		
	138	5690	10.10	10.50		10.40	10.50		10.50	10.50	10.20	10.50	13.22	13.50		



Power Selection				Hotspot / Body-worn / Product Specific			Hotspot / Body-worn / Product Specific			Hotspot / Body-worn / Product Specific						
Transmit Antenna				Ant 4			Ant 5			Ant 4+5						
5.5GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Ant 4 Average power (dBm)	Ant 4 Tune-Up Limit	Ant 5 Average power (dBm)	Ant 5 Tune-Up Limit	Ant 4+5 Average power (dBm)	Ant 4+5 Tune-Up Limit	Duty Cycle %
	5.5GHz WLAN	802.11a 6Mbps	100	5500	17.10	17.50	98.11	17.00	17.50	98.11	17.50	17.50	17.30	17.50	20.41	20.50
116			5580	17.10	17.50	17.10		17.50	17.40		17.50	16.70	17.50	20.09	20.50	
124			5620	17.10	17.50	17.10		17.50	17.40		17.50	17.50	17.50	20.45	20.50	
132			5660	17.10	17.50	17.40		17.50	17.40		17.50	17.40	17.50	20.41	20.50	
144			5720	17.30	17.50	17.20		17.50	17.30		17.50	17.00	17.50	20.17	20.50	
802.11n-HT20 MCS0		100	5500	17.30	17.50	98.22	17.10	17.50	98.22	17.40	17.50	17.20	17.50	20.31	20.50	98.22
		116	5580	17.10	17.50		17.10	17.50		17.20	17.50	16.70	17.50	19.60	20.50	
		124	5620	17.40	17.50		17.10	17.50		17.40	17.50	17.00	17.50	20.21	20.50	
		132	5660	17.40	17.50		17.30	17.50		17.30	17.50	17.00	17.50	20.17	20.50	
		144	5720	17.30	17.50		17.40	17.50		17.50	17.50	16.50	17.50	20.04	20.50	
802.11n-HT40 MCS0		102	5510	13.40	13.50	96.46	13.20	13.50	96.45	13.50	13.50	12.90	13.50	16.22	16.50	96.45
		110	5550	17.10	17.50		17.40	17.50		17.50	17.50	16.80	17.50	20.17	20.50	
		126	5630	17.20	17.50		17.30	17.50		17.20	17.50	17.00	17.50	20.09	20.50	
		134	5670	17.20	17.50		17.40	17.50		17.30	17.50	17.20	17.50	20.26	20.50	
		142	5710	17.40	17.50		17.20	17.50		17.50	17.50	16.80	17.50	20.17	20.50	
802.11ac-VHT20 MCS0		100	5500	17.10	17.50	98.23	17.30	17.50	98.23	17.40	17.50	17.10	17.50	20.26	20.50	98.23
		116	5580	17.10	17.50		17.30	17.50		17.50	17.50	17.00	17.50	20.25	20.50	
		124	5620	17.10	17.50		17.20	17.50		17.40	17.50	16.90	17.50	20.17	20.50	
		132	5660	17.10	17.50		17.40	17.50		17.40	17.50	17.30	17.50	20.37	20.50	
		144	5720	17.10	17.50		17.20	17.50		17.50	17.50	17.20	17.50	20.33	20.50	
802.11ac-VHT40 MCS0	102	5510	13.20	13.50	96.45	13.40	13.50	96.45	13.50	13.50	13.20	13.50	16.47	16.50	96.45	
	110	5550	17.30	17.50		17.40	17.50		17.50	17.50	16.70	17.50	20.13	20.50		
	126	5630	17.20	17.50		17.40	17.50		17.40	17.50	17.30	17.50	20.37	20.50		
	134	5670	17.30	17.50		17.20	17.50		17.40	17.50	17.20	17.50	20.31	20.50		
	142	5710	17.40	17.50		17.40	17.50		17.40	17.50	16.90	17.50	20.17	20.50		
802.11ac-VHT80 MCS0	106	5530	11.60	12.00	92.00	11.80	12.00	92.00	12.00	12.00	11.60	12.00	14.87	15.00	92.00	
	122	5610	17.40	17.50		17.40	17.50		17.50	17.50	17.10	17.50	20.42	20.50		
	138	5690	17.10	17.50		17.40	17.50		17.40	17.50	17.00	17.50	20.21	20.50		



Power Selection				Head			Head			Head						
Transmit Antenna				Ant 4			Ant 5			Ant 4+5						
5.8GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Ant 4 Average power (dBm)	Ant 4 Tune-Up Limit	Ant 5 Average power (dBm)	Ant 5 Tune-Up Limit	Ant 4+5 Average power (dBm)	Ant 4+5 Tune-Up Limit	Duty Cycle %
	802.11a MCS0		149	5745	9.60	10.00	98.11	9.60	10.00	98.11	9.90	10.00	9.40	10.00	12.79	13.00
157			5785	9.80	10.00	9.60		10.00	9.80		10.00	8.90	10.00	12.55	13.00	
165			5825	9.90	10.00	9.70		10.00	9.90		10.00	8.80	10.00	12.55	13.00	
802.11n-HT20 MCS0		149	5745	9.90	10.00	98.22	9.90	10.00	98.22	9.80	10.00	9.40	10.00	12.79	13.00	98.22
		157	5785	9.70	10.00		9.90	10.00		9.30	10.00	12.79	13.00			
		165	5825	9.70	10.00		9.60	10.00		9.80	10.00	8.90	10.00	12.55	13.00	
802.11n-HT40 MCS0		151	5755	9.80	10.00	96.46	9.80	10.00	96.45	9.70	10.00	9.50	10.00	12.55	13.00	96.45
		159	5795	9.90	10.00		9.60	10.00		9.80	10.00	9.00	10.00	12.55	13.00	
802.11ac-VHT20 MCS0		149	5745	9.90	10.00	98.23	9.90	10.00	98.23	9.80	10.00	9.40	10.00	12.79	13.00	98.23
		157	5785	9.60	10.00		9.90	10.00		9.70	10.00	9.10	10.00	12.30	13.00	
		165	5825	9.80	10.00		9.60	10.00		9.80	10.00	9.00	10.00	12.55	13.00	
802.11ac-VHT40 MCS0		151	5755	9.90	10.00	96.45	9.90	10.00	96.45	9.80	10.00	9.70	10.00	12.79	13.00	96.45
		159	5795	9.90	10.00		9.60	10.00		9.80	10.00	9.00	10.00	12.55	13.00	
802.11ac-VHT80 MCS0		155	5775	9.90	10.00	92.00	9.60	10.00	92.00	9.60	10.00	9.40	10.00	12.55	13.00	92.00

Power Selection				Hotspot / Body-worn / Product Specific			Hotspot / Body-worn / Product Specific			Hotspot / Body-worn / Product Specific						
Transmit Antenna				Ant 4			Ant 5			Ant 4+5						
5.8GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Ant 4 Average power (dBm)	Ant 4 Tune-Up Limit	Ant 5 Average power (dBm)	Ant 5 Tune-Up Limit	Ant 4+5 Average power (dBm)	Ant 4+5 Tune-Up Limit	Duty Cycle %
	802.11a MCS0		149	5745	17.30	17.50	98.11	17.40	17.50	98.11	17.40	17.50	17.00	17.50	20.21	20.50
157			5785	17.20	17.50	17.40		17.50	17.30		17.50	16.60	17.50	20.00	20.50	
165			5825	17.20	17.50	17.30		17.50	17.40		17.50	16.80	17.50	20.13	20.50	
802.11n-HT20 MCS0		149	5745	17.20	17.50	98.22	17.40	17.50	98.22	17.20	17.50	17.20	17.50	20.17	20.50	98.22
		157	5785	17.20	17.50		17.40	17.50		17.30	17.50	17.10	17.50	20.21	20.50	
		165	5825	17.30	17.50		17.10	17.50		17.40	17.50	16.50	17.50	20.00	20.50	
802.11n-HT40 MCS0		151	5755	17.40	17.50	96.46	17.10	17.50	96.45	17.30	17.50	17.10	17.50	20.21	20.50	96.45
		159	5795	17.40	17.50		17.20	17.50		17.40	17.50	16.70	17.50	20.09	20.50	
802.11ac-VHT20 MCS0		149	5745	17.10	17.50	98.23	17.30	17.50	98.23	17.50	17.50	17.00	17.50	20.25	20.50	98.23
		157	5785	17.10	17.50		17.40	17.50		17.40	17.50	16.70	17.50	20.09	20.50	
		165	5825	17.20	17.50		17.10	17.50		17.30	17.50	16.80	17.50	20.09	20.50	
802.11ac-VHT40 MCS0		151	5755	17.20	17.50	96.45	17.20	17.50	96.45	17.30	17.50	16.90	17.50	20.13	20.50	96.45
		159	5795	17.30	17.50		17.40	17.50		17.40	17.50	16.30	17.50	19.91	20.50	
802.11ac-VHT80 MCS0		155	5775	17.40	17.50	92.00	17.40	17.50	92.00	17.50	17.50	17.20	17.50	20.41	20.50	92.00




14. Bluetooth Conducted RF Output Power (Unit: dBm)

Mode	Channel	Frequency (MHz)	Average power (dBm)		
			1Mbps	2Mbps	3Mbps
BR / EDR	CH 00	2402	17.95	12.68	12.66
	CH 39	2441	17.98	12.76	12.95
	CH 78	2480	17.28	12.18	12.38
Tune-up Limit			18	13	13

Mode	Channel	Frequency (MHz)	Average power (dBm)	
			1Mbps	2Mbps
LE	CH 00	2402	9.91	9.90
	CH 19	2440	9.47	9.46
	CH 39	2480	9.75	9.76
Tune-up Limit			10	10

General Note:

- For 2.4GHz Bluetooth SAR testing was selected 1Mbps due to its highest average power and the duty cycle is 76.84% considered in SAR testing.

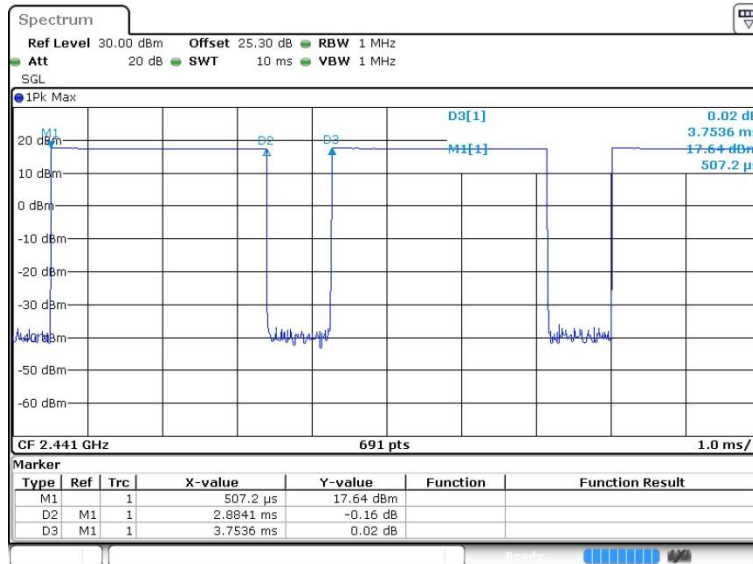

15. Exposure Conditions

Distance of the Antenna to the EUT surface/edge						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN UAT	≤ 25mm	≤ 25mm	≤ 25mm	>25mm	≤ 25mm	≤ 25mm
WWAN LAT	≤ 25mm	≤ 25mm	>25mm	≤ 25mm	≤ 25mm	≤ 25mm
BT&2.4GHz WLAN Ant 4	≤ 25mm	≤ 25mm	≤ 25mm	>25mm	≤ 25mm	>25mm
2.4GHz WLAN Ant 5	≤ 25mm	≤ 25mm	≤ 25mm	>25mm	≤ 25mm	>25mm
5GHz WLAN Ant 4	≤ 25mm	≤ 25mm	≤ 25mm	>25mm	≤ 25mm	>25mm
5GHz WLAN Ant 5	≤ 25mm	≤ 25mm	≤ 25mm	>25mm	≤ 25mm	>25mm
5GHz WLAN Ant 4+5	≤ 25mm	≤ 25mm	≤ 25mm	>25mm	≤ 25mm	>25mm
Positions for SAR tests; Hotspot mode						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN UAT	Yes	Yes	Yes	No	Yes	Yes
WWAN LAT	Yes	Yes	No	Yes	Yes	Yes
BT&2.4GHz WLAN Ant 4	Yes	Yes	Yes	No	Yes	No
2.4GHz WLAN Ant 5	Yes	Yes	Yes	No	Yes	No
5GHz WLAN Ant 4	Yes	Yes	Yes	No	Yes	No
5GHz WLAN Ant 5	Yes	Yes	Yes	No	Yes	No
5GHz WLAN Ant 4+5	Yes	Yes	Yes	No	Yes	No

General Note:

- Referring to KDB 941225 D06 v02r01, when the overall device length and width are ≥ 9cm*5cm, the test distance is 10 mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge.



16. SAR Test Results

General Note:

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - b. For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
 - c. For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)*Tune-up Scaling Factor
 - d. For WLAN/Bluetooth: Reported SAR(W/kg)= Measured SAR(W/kg)* Duty Cycle scaling factor * Tune-up scaling factor
 - e. For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix 63.3%/62.9% = 1.006 is applied to scale-up the measured SAR result.
The Reported TDD LTE SAR = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.
2. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
3. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg.
4. Per KDB 648474 D04v01r03, when the reported SAR for a body-worn accessory measured without a headset connected to the handset is ≤ 1.2 W/kg, SAR testing with a headset connected to the handset is not required.
5. Per KDB 648474 D04v01r03, for WWAN / 2.4GHz, 5.2GHz and 5.8GHz WLAN and Bluetooth hotspot SAR was < 1.2 W/kg, therefore, the extremity SAR was not necessary even the overall diagonal dimension is > 16 cm. only 5.3GHz and 5.5GHz WLAN extremity is required.
6. In section 17 WWAN SAR testing, "WiFi on / WiFi off" means the same power limits apply to WiFi on or WiFi off in all mode, in section 17 WiFi/BT SAR testing, "WWAN on / WWAN off" mean the same power limit apply to WWAN on or WWAN off in all mode.

GSM Note:

1. Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE / DTM modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the GPRS (4Tx slots) for GSM850/GSM1900 is considered as the primary mode.
2. Other configurations of GSM / GPRS / EDGE / DTM are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq 1/4$ dB higher than the primary mode, SAR measurement is not required for the secondary mode.

UMTS Note:

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is $\leq 1/4$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA, and according to the following RF output power, the output power results of the secondary modes (HSUPA, HSDPA, DC-HSDPA) are less than $1/4$ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA.

**LTE Note:**

1. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
2. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
3. Per KDB 941225 D05v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
4. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
5. Per KDB 941225 D05v02r05, Smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
6. For LTE B4 / B12 / B26 / B38 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
7. LTE band 5 / 17 SAR test and the conducted measurement was covered by Band 26 / 12; according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - a. The maximum output power, including tolerance, for the smaller band is \leq the larger band to qualify for the SAR test exclusion.
 - b. The channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band.

WLAN Note:

1. Per KDB 248227 D01v02r02, for 2.4GHz 802.11g/n SAR testing is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.
2. Per KDB 248227 D01v02r02, U-NII-1 Head SAR testing is required when the U-NII-2A band highest reported SAR for a test configuration is > 1.2 W/kg, SAR is required for U-NII-1 band.
3. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
4. For all positions / configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions / configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.
5. When in MIMO SAR testing, if the hot spots are separated the scaling factor would scale each hot spot based on the difference between the power for that transmit antenna and the maximum rated power, if the hot spot were not separable or too much overlap which the scaling factor is the worst case rated power/measured power across the two chains in SAR calculation.
6. During SAR testing the WLAN transmission was verified using a spectrum analyzer.



16.1 Head SAR

<GSM SAR>

WiFi off / WiFi on												
Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
01	GSM850_Ant 0	GPRS 4 Tx slots	Right Cheek	0mm	189	836.4	28.51	29.00	1.119	-0.19	0.250	0.280
	GSM850_Ant 0	GPRS 4 Tx slots	Right Tilted	0mm	189	836.4	28.51	29.00	1.119	-0.14	0.124	0.139
	GSM850_Ant 0	GPRS 4 Tx slots	Left Cheek	0mm	189	836.4	28.51	29.00	1.119	0.01	0.229	0.256
	GSM850_Ant 0	GPRS 4 Tx slots	Left Tilted	0mm	189	836.4	28.51	29.00	1.119	0.02	0.229	0.256

WiFi off / WiFi on												
Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM1900_Ant 0	GPRS (4 Tx slots)	Right Cheek	0mm	512	1850.2	26.11	26.50	1.094	-0.04	0.184	0.201
	GSM1900_Ant 0	GPRS (4 Tx slots)	Right Tilted	0mm	512	1850.2	26.11	26.50	1.094	0.06	0.098	0.107
02	GSM1900_Ant 0	GPRS (4 Tx slots)	Left Cheek	0mm	512	1850.2	26.11	26.50	1.094	-0.13	0.197	0.216
	GSM1900_Ant 0	GPRS (4 Tx slots)	Left Tilted	0mm	512	1850.2	26.11	26.50	1.094	0.04	0.126	0.138

<WCDMA SAR>

WiFi off												
Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA II_Ant 0	RMC 12.2Kbps	Right Cheek	0mm	9262	1852.4	25.54	25.70	1.038	0.07	0.324	0.336
	WCDMA II_Ant 0	RMC 12.2Kbps	Right Tilted	0mm	9262	1852.4	25.54	25.70	1.038	0.12	0.182	0.189
03	WCDMA II_Ant 0	RMC 12.2Kbps	Left Cheek	0mm	9262	1852.4	25.54	25.70	1.038	0.09	0.457	0.474
	WCDMA II_Ant 0	RMC 12.2Kbps	Left Tilted	0mm	9262	1852.4	25.54	25.70	1.038	0.14	0.336	0.349

WiFi on												
Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA II_Ant 0	RMC 12.2Kbps	Right Cheek	0mm	9262	1852.4	22.48	22.60	1.028	-0.15	0.150	0.154
	WCDMA II_Ant 0	RMC 12.2Kbps	Right Tilted	0mm	9262	1852.4	22.48	22.60	1.028	-0.08	0.097	0.100
	WCDMA II_Ant 0	RMC 12.2Kbps	Left Cheek	0mm	9262	1852.4	22.48	22.60	1.028	0.13	0.209	0.215
	WCDMA II_Ant 0	RMC 12.2Kbps	Left Tilted	0mm	9262	1852.4	22.48	22.60	1.028	0.02	0.141	0.145

WiFi off / WiFi on												
Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
04	WCDMA IV_Ant 0	RMC 12.2Kbps	Right Cheek	0mm	1312	1712.4	23.46	24.00	1.132	0.08	0.186	0.211
	WCDMA IV_Ant 0	RMC 12.2Kbps	Right Tilted	0mm	1312	1712.4	23.46	24.00	1.132	0.16	0.108	0.122
	WCDMA IV_Ant 0	RMC 12.2Kbps	Left Cheek	0mm	1312	1712.4	23.46	24.00	1.132	-0.03	0.176	0.199
	WCDMA IV_Ant 0	RMC 12.2Kbps	Left Tilted	0mm	1312	1712.4	23.46	24.00	1.132	-0.05	0.115	0.130



<FDD LTE SAR>

WiFi off															
Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 2_Ant 0	20M	QPSK	1	0	Right Cheek	0mm	18900	1880	24.56	25.70	1.300	-0.18	0.289	0.376
	LTE Band 2_Ant 0	20M	QPSK	50	0	Right Cheek	0mm	18900	1880	23.60	24.70	1.288	0.04	0.286	0.368
	LTE Band 2_Ant 0	20M	QPSK	1	0	Right Tilted	0mm	18900	1880	24.56	25.70	1.300	-0.14	0.119	0.155
	LTE Band 2_Ant 0	20M	QPSK	50	0	Right Tilted	0mm	18900	1880	23.60	24.70	1.288	0.07	0.112	0.144
05	LTE Band 2_Ant 0	20M	QPSK	1	0	Left Cheek	0mm	18900	1880	24.56	25.70	1.300	-0.04	0.339	0.441
	LTE Band 2_Ant 0	20M	QPSK	50	0	Left Cheek	0mm	18900	1880	23.60	24.70	1.288	-0.04	0.322	0.415
	LTE Band 2_Ant 0	20M	QPSK	1	0	Left Tilted	0mm	18900	1880	24.56	25.70	1.300	0.01	0.186	0.242
	LTE Band 2_Ant 0	20M	QPSK	50	0	Left Tilted	0mm	18900	1880	23.60	24.70	1.288	-0.04	0.175	0.225

WiFi on															
Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 2_Ant 0	20M	QPSK	1	0	Right Cheek	0mm	18900	1880	21.62	22.70	1.282	-0.16	0.160	0.205
	LTE Band 2_Ant 0	20M	QPSK	50	0	Right Cheek	0mm	18900	1880	21.61	22.70	1.285	0.05	0.164	0.211
	LTE Band 2_Ant 0	20M	QPSK	1	0	Right Tilted	0mm	18900	1880	21.62	22.70	1.282	-0.09	0.066	0.085
	LTE Band 2_Ant 0	20M	QPSK	50	0	Right Tilted	0mm	18900	1880	21.61	22.70	1.285	0.13	0.065	0.084
	LTE Band 2_Ant 0	20M	QPSK	1	0	Left Cheek	0mm	18900	1880	21.62	22.70	1.282	0.03	0.193	0.247
	LTE Band 2_Ant 0	20M	QPSK	50	0	Left Cheek	0mm	18900	1880	21.61	22.70	1.285	0.01	0.199	0.256
	LTE Band 2_Ant 0	20M	QPSK	1	0	Left Tilted	0mm	18900	1880	21.62	22.70	1.282	-0.01	0.086	0.110
	LTE Band 2_Ant 0	20M	QPSK	50	0	Left Tilted	0mm	18900	1880	21.61	22.70	1.285	0.08	0.089	0.114

WiFi off / WiFi on															
Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
06	LTE Band 4_Ant 0	20M	QPSK	1	0	Right Cheek	0mm	20175	1732.5	23.28	24.50	1.324	-0.09	0.202	0.268
	LTE Band 4_Ant 0	20M	QPSK	50	0	Right Cheek	0mm	20175	1732.5	22.28	23.50	1.324	-0.01	0.166	0.220
	LTE Band 4_Ant 0	20M	QPSK	1	0	Right Tilted	0mm	20175	1732.5	23.28	24.50	1.324	0.04	0.103	0.136
	LTE Band 4_Ant 0	20M	QPSK	50	0	Right Tilted	0mm	20175	1732.5	22.28	23.50	1.324	0.07	0.085	0.113
	LTE Band 4_Ant 0	20M	QPSK	1	0	Left Cheek	0mm	20175	1732.5	23.28	24.50	1.324	0.09	0.184	0.244
	LTE Band 4_Ant 0	20M	QPSK	50	0	Left Cheek	0mm	20175	1732.5	22.28	23.50	1.324	0.11	0.149	0.197
	LTE Band 4_Ant 0	20M	QPSK	1	0	Left Tilted	0mm	20175	1732.5	23.28	24.50	1.324	0.08	0.105	0.139
	LTE Band 4_Ant 0	20M	QPSK	50	0	Left Tilted	0mm	20175	1732.5	22.28	23.50	1.324	-0.02	0.086	0.114

WiFi off / WiFi on															
Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 12_Ant 0	10M	QPSK	1	0	Right Cheek	0mm	23095	707.5	24.67	25.70	1.268	0.05	0.189	0.240
	LTE Band 12_Ant 0	10M	QPSK	25	0	Right Cheek	0mm	23095	707.5	23.79	24.70	1.233	0.04	0.154	0.190
	LTE Band 12_Ant 0	10M	QPSK	1	0	Right Tilted	0mm	23095	707.5	24.67	25.70	1.268	0.07	0.122	0.155
	LTE Band 12_Ant 0	10M	QPSK	25	0	Right Tilted	0mm	23095	707.5	23.79	24.70	1.233	0.07	0.101	0.125
07	LTE Band 12_Ant 0	10M	QPSK	1	0	Left Cheek	0mm	23095	707.5	24.67	25.70	1.268	0.12	0.196	0.248
	LTE Band 12_Ant 0	10M	QPSK	25	0	Left Cheek	0mm	23095	707.5	23.79	24.70	1.233	0.01	0.161	0.199
	LTE Band 12_Ant 0	10M	QPSK	1	0	Left Tilted	0mm	23095	707.5	24.67	25.70	1.268	0.09	0.156	0.198
	LTE Band 12_Ant 0	10M	QPSK	25	0	Left Tilted	0mm	23095	707.5	23.79	24.70	1.233	0.06	0.134	0.165



WiFi off / WiFi on																
Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	
08	LTE Band 13_Ant 0	10M	QPSK	1	0	Right Cheek	0mm	23230	782	24.26	25.30	1.271	-0.01	0.202	0.257	
	LTE Band 13_Ant 0	10M	QPSK	25	0	Right Cheek	0mm	23230	782	23.31	24.30	1.256	0.06	0.171	0.215	
	LTE Band 13_Ant 0	10M	QPSK	1	0	Right Tilted	0mm	23230	782	24.26	25.30	1.271	0.05	0.129	0.164	
	LTE Band 13_Ant 0	10M	QPSK	25	0	Right Tilted	0mm	23230	782	23.31	24.30	1.256	0.07	0.110	0.138	
	LTE Band 13_Ant 0	10M	QPSK	1	0	Left Cheek	0mm	23230	782	24.26	25.30	1.271	-0.03	0.190	0.241	
	LTE Band 13_Ant 0	10M	QPSK	25	0	Left Cheek	0mm	23230	782	23.31	24.30	1.256	0.04	0.162	0.203	
	LTE Band 13_Ant 0	10M	QPSK	1	0	Left Tilted	0mm	23230	782	24.26	25.30	1.271	-0.02	0.153	0.194	
	LTE Band 13_Ant 0	10M	QPSK	25	0	Left Tilted	0mm	23230	782	23.31	24.30	1.256	0.07	0.130	0.163	

WiFi off / WiFi on																
Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	
09	LTE Band 26_Ant 0	15M	QPSK	1	0	Right Cheek	0mm	26865	831.5	24.70	25.70	1.259	-0.09	0.233	0.293	
	LTE Band 26_Ant 0	15M	QPSK	36	0	Right Cheek	0mm	26865	831.5	23.73	24.70	1.250	-0.02	0.175	0.219	
	LTE Band 26_Ant 0	15M	QPSK	1	0	Right Tilted	0mm	26865	831.5	24.70	25.70	1.259	0.03	0.129	0.162	
	LTE Band 26_Ant 0	15M	QPSK	36	0	Right Tilted	0mm	26865	831.5	23.73	24.70	1.250	0	0.104	0.130	
	LTE Band 26_Ant 0	15M	QPSK	1	0	Left Cheek	0mm	26865	831.5	24.70	25.70	1.259	0.04	0.196	0.247	
	LTE Band 26_Ant 0	15M	QPSK	36	0	Left Cheek	0mm	26865	831.5	23.73	24.70	1.250	0.01	0.163	0.204	
	LTE Band 26_Ant 0	15M	QPSK	1	0	Left Tilted	0mm	26865	831.5	24.70	25.70	1.259	0	0.134	0.169	
	LTE Band 26_Ant 0	15M	QPSK	36	0	Left Tilted	0mm	26865	831.5	23.73	24.70	1.250	-0.01	0.110	0.138	

<TDD LTE SAR>

WiFi off																	
Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
10	LTE Band 38_Ant 2	20M	QPSK	1	0	Right Cheek	0mm	38000	2595	24.57	25.70	1.297	62.90	1.006	0.18	0.625	0.816
	LTE Band 38_Ant 2	20M	QPSK	50	50	Right Cheek	0mm	38000	2595	23.62	24.70	1.282	62.90	1.006	0.19	0.487	0.628
	LTE Band 38_Ant 2	20M	QPSK	1	0	Right Tilted	0mm	38000	2595	24.57	25.70	1.297	62.90	1.006	0.12	0.138	0.180
	LTE Band 38_Ant 2	20M	QPSK	50	50	Right Tilted	0mm	38000	2595	23.62	24.70	1.282	62.90	1.006	0.01	0.111	0.143
	LTE Band 38_Ant 2	20M	QPSK	1	0	Left Cheek	0mm	38000	2595	24.57	25.70	1.297	62.90	1.006	-0.06	0.357	0.466
	LTE Band 38_Ant 2	20M	QPSK	50	50	Left Cheek	0mm	38000	2595	23.62	24.70	1.282	62.90	1.006	0.02	0.283	0.365
	LTE Band 38_Ant 2	20M	QPSK	1	0	Left Tilted	0mm	38000	2595	24.57	25.70	1.297	62.90	1.006	-0.16	0.216	0.282
	LTE Band 38_Ant 2	20M	QPSK	50	50	Left Tilted	0mm	38000	2595	23.62	24.70	1.282	62.90	1.006	-0.13	0.188	0.243
WiFi on																	
Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 38_Ant 2	20M	QPSK	1	99	Right Cheek	0mm	38000	2595	22.46	23.20	1.186	62.90	1.006	0.14	0.300	0.358
	LTE Band 38_Ant 2	20M	QPSK	50	50	Right Cheek	0mm	38000	2595	22.28	23.20	1.236	62.90	1.006	0.1	0.362	0.450
	LTE Band 38_Ant 2	20M	QPSK	1	99	Right Tilted	0mm	38000	2595	22.46	23.20	1.186	62.90	1.006	-0.04	0.089	0.106
	LTE Band 38_Ant 2	20M	QPSK	50	50	Right Tilted	0mm	38000	2595	22.28	23.20	1.236	62.90	1.006	0.07	0.087	0.108
	LTE Band 38_Ant 2	20M	QPSK	1	99	Left Cheek	0mm	38000	2595	22.46	23.20	1.186	62.90	1.006	-0.1	0.210	0.251
	LTE Band 38_Ant 2	20M	QPSK	50	50	Left Cheek	0mm	38000	2595	22.28	23.20	1.236	62.90	1.006	-0.12	0.216	0.269
	LTE Band 38_Ant 2	20M	QPSK	1	99	Left Tilted	0mm	38000	2595	22.46	23.20	1.186	62.90	1.006	-0.03	0.124	0.148
	LTE Band 38_Ant 2	20M	QPSK	50	50	Left Tilted	0mm	38000	2595	22.28	23.20	1.236	62.90	1.006	0.14	0.135	0.168



WiFi off																	
Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 41_Ant 2	20M	QPSK	1	0	Right Cheek	0mm	41490	2680	24.05	25.00	1.245	62.90	1.006	-0.19	0.523	0.655
	LTE Band 41_Ant 2	20M	QPSK	1	0	Right Cheek	0mm	39750	2506	23.87	25.00	1.297	62.90	1.006	-0.09	0.464	0.606
	LTE Band 41_Ant 2	20M	QPSK	1	0	Right Cheek	0mm	40185	2549.5	23.94	25.00	1.276	62.90	1.006	-0.09	0.530	0.681
11	LTE Band 41_Ant 2	20M	QPSK	1	0	Right Cheek	0mm	40620	2593	23.92	25.00	1.282	62.90	1.006	0.03	0.585	0.755
	LTE Band 41_Ant 2	20M	QPSK	1	0	Right Cheek	0mm	41055	2636.5	23.97	25.00	1.268	62.90	1.006	-0.02	0.539	0.687
	LTE Band 41_Ant 2	20M	QPSK	50	0	Right Cheek	0mm	41490	2680	23.06	24.00	1.242	62.90	1.006	-0.07	0.418	0.522
	LTE Band 41_Ant 2	20M	QPSK	1	0	Right Tilted	0mm	41490	2680	24.05	25.00	1.245	62.90	1.006	0	0.157	0.197
	LTE Band 41_Ant 2	20M	QPSK	50	0	Right Tilted	0mm	41490	2680	23.06	24.00	1.242	62.90	1.006	0.15	0.124	0.155
	LTE Band 41_Ant 2	20M	QPSK	1	0	Left Cheek	0mm	41490	2680	24.05	25.00	1.245	62.90	1.006	-0.1	0.281	0.352
	LTE Band 41_Ant 2	20M	QPSK	50	0	Left Cheek	0mm	41490	2680	23.06	24.00	1.242	62.90	1.006	0.01	0.222	0.277
	LTE Band 41_Ant 2	20M	QPSK	1	0	Left Tilted	0mm	41490	2680	24.05	25.00	1.245	62.90	1.006	-0.19	0.229	0.287
	LTE Band 41_Ant 2	20M	QPSK	50	0	Left Tilted	0mm	41490	2680	23.06	24.00	1.242	62.90	1.006	-0.1	0.178	0.222
WiFi on																	
Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 41_Ant 2	20M	QPSK	1	0	Right Cheek	0mm	41490	2680	22.42	23.00	1.143	62.90	1.006	0.15	0.342	0.393
	LTE Band 41_Ant 2	20M	QPSK	50	0	Right Cheek	0mm	41490	2680	22.40	23.00	1.148	62.90	1.006	0.15	0.286	0.330
	LTE Band 41_Ant 2	20M	QPSK	1	0	Right Tilted	0mm	41490	2680	22.42	23.00	1.143	62.90	1.006	-0.08	0.103	0.118
	LTE Band 41_Ant 2	20M	QPSK	50	0	Right Tilted	0mm	41490	2680	22.40	23.00	1.148	62.90	1.006	-0.08	0.103	0.119
	LTE Band 41_Ant 2	20M	QPSK	1	0	Left Cheek	0mm	41490	2680	22.42	23.00	1.143	62.90	1.006	-0.19	0.188	0.216
	LTE Band 41_Ant 2	20M	QPSK	50	0	Left Cheek	0mm	41490	2680	22.40	23.00	1.148	62.90	1.006	-0.19	0.188	0.217
	LTE Band 41_Ant 2	20M	QPSK	1	0	Left Tilted	0mm	41490	2680	22.42	23.00	1.143	62.90	1.006	-0.13	0.144	0.166
	LTE Band 41_Ant 2	20M	QPSK	50	0	Left Tilted	0mm	41490	2680	22.40	23.00	1.148	62.90	1.006	-0.07	0.142	0.164

<WLAN SAR>

WWAN off / WWAN on															
Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Right Cheek	0mm	Ant 4	1	2412	14.40	14.50	1.023	99.20	1.008	-0.1	0.289	0.298
	WLAN2.4GHz	802.11b 1Mbps	Right Tilted	0mm	Ant 4	1	2412	14.40	14.50	1.023	99.20	1.008	0.09	0.214	0.221
	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0mm	Ant 4	1	2412	14.40	14.50	1.023	99.20	1.008	-0.09	0.554	0.571
	WLAN2.4GHz	802.11b 1Mbps	Left Tilted	0mm	Ant 4	1	2412	14.40	14.50	1.023	99.20	1.008	-0.14	0.316	0.326
	WLAN2.4GHz	802.11b 1Mbps	Right Cheek	0mm	Ant 5	6	2437	14.40	14.50	1.023	99.20	1.008	-0.02	0.112	0.116
	WLAN2.4GHz	802.11b 1Mbps	Right Tilted	0mm	Ant 5	6	2437	14.40	14.50	1.023	99.20	1.008	0.05	0.037	0.038
	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0mm	Ant 5	6	2437	14.40	14.50	1.023	99.20	1.008	-0.07	0.333	0.343
	WLAN2.4GHz	802.11b 1Mbps	Left Tilted	0mm	Ant 5	6	2437	14.40	14.50	1.023	99.20	1.008	0.09	0.080	0.083
	WLAN2.4GHz	802.11b 1Mbps	Right Cheek	0mm	Ant 4+5	1	2412	14.10	14.50	1.096	99.20	1.008	-0.11	0.273	0.302
	WLAN2.4GHz	802.11b 1Mbps	Right Tilted	0mm	Ant 4+5	1	2412	14.10	14.50	1.096	99.20	1.008	0.19	0.265	0.293
12	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0mm	Ant 4+5	1	2412	14.10	14.50	1.096	99.20	1.008	-0.08	0.555	0.613
	WLAN2.4GHz	802.11b 1Mbps	Left Tilted	0mm	Ant 4+5	1	2412	14.10	14.50	1.096	99.20	1.008	-0.03	0.295	0.326



WWAN off / WWAN on															
Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Cheek	0mm	Ant 4	58	5290	12.30	12.50	1.047	92.00	1.087	-0.16	0.229	0.261
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Tilted	0mm	Ant 4	58	5290	12.30	12.50	1.047	92.00	1.087	-0.03	0.233	0.265
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Cheek	0mm	Ant 4	58	5290	12.30	12.50	1.047	92.00	1.087	-0.19	0.297	0.338
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Tilted	0mm	Ant 4	58	5290	12.30	12.50	1.047	92.00	1.087	-0.18	0.268	0.305
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Cheek	0mm	Ant 5	58	5290	12.10	12.50	1.096	92.00	1.087	-0.12	0.074	0.088
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Tilted	0mm	Ant 5	58	5290	12.10	12.50	1.096	92.00	1.087	-0.14	0.069	0.082
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Cheek	0mm	Ant 5	58	5290	12.10	12.50	1.096	92.00	1.087	-0.13	0.134	0.160
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Tilted	0mm	Ant 5	58	5290	12.10	12.50	1.096	92.00	1.087	-0.18	0.083	0.099
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Cheek	0mm	Ant 4+5	58	5290	12.40	12.50	1.023	92.00	1.087	-0.07	0.325	0.362
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Tilted	0mm	Ant 4+5	58	5290	12.40	12.50	1.023	92.00	1.087	-0.16	0.345	0.384
13	WLAN5GHz	802.11ac-VHT80 MCS0	Left Cheek	0mm	Ant 4+5	58	5290	12.40	12.50	1.023	92.00	1.087	0.1	0.364	0.405
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Tilted	0mm	Ant 4+5	58	5290	12.40	12.50	1.023	92.00	1.087	-0.11	0.355	0.395
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Cheek	0mm	Ant 4	138	5690	10.10	10.50	1.096	92.00	1.087	-0.05	0.177	0.211
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Tilted	0mm	Ant 4	138	5690	10.10	10.50	1.096	92.00	1.087	-0.03	0.191	0.228
14	WLAN5GHz	802.11ac-VHT80 MCS0	Left Cheek	0mm	Ant 4	138	5690	10.10	10.50	1.096	92.00	1.087	0.02	0.236	0.281
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Tilted	0mm	Ant 4	138	5690	10.10	10.50	1.096	92.00	1.087	-0.15	0.225	0.268
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Cheek	0mm	Ant 5	138	5690	10.40	10.50	1.023	92.00	1.087	-0.08	0.018	0.020
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Tilted	0mm	Ant 5	138	5690	10.40	10.50	1.023	92.00	1.087	0.09	0.034	0.038
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Cheek	0mm	Ant 5	138	5690	10.40	10.50	1.023	92.00	1.087	-0.08	0.065	0.072
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Tilted	0mm	Ant 5	138	5690	10.40	10.50	1.023	92.00	1.087	-0.1	0.053	0.059
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Cheek	0mm	Ant 4+5	138	5690	10.20	10.50	1.072	92.00	1.087	-0.12	0.181	0.211
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Tilted	0mm	Ant 4+5	138	5690	10.20	10.50	1.072	92.00	1.087	-0.06	0.195	0.227
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Cheek	0mm	Ant 4+5	138	5690	10.20	10.50	1.072	92.00	1.087	0.05	0.200	0.233
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Tilted	0mm	Ant 4+5	138	5690	10.20	10.50	1.072	92.00	1.087	-0.06	0.232	0.270
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Cheek	0mm	Ant 4	155	5775	9.90	10.00	1.023	92.00	1.087	-0.19	0.118	0.131
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Tilted	0mm	Ant 4	155	5775	9.90	10.00	1.023	92.00	1.087	-0.15	0.111	0.123
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Cheek	0mm	Ant 4	155	5775	9.90	10.00	1.023	92.00	1.087	-0.17	0.125	0.139
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Tilted	0mm	Ant 4	155	5775	9.90	10.00	1.023	92.00	1.087	-0.13	0.124	0.138
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Cheek	0mm	Ant 5	155	5775	9.60	10.00	1.096	92.00	1.087	-0.05	0.022	0.026
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Tilted	0mm	Ant 5	155	5775	9.60	10.00	1.096	92.00	1.087	0.12	0.033	0.039
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Cheek	0mm	Ant 5	155	5775	9.60	10.00	1.096	92.00	1.087	-0.11	0.041	0.049
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Tilted	0mm	Ant 5	155	5775	9.60	10.00	1.096	92.00	1.087	-0.16	0.025	0.030
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Cheek	0mm	Ant 4+5	155	5775	9.40	10.00	1.148	92.00	1.087	-0.13	0.141	0.176
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Tilted	0mm	Ant 4+5	155	5775	9.40	10.00	1.148	92.00	1.087	-0.14	0.139	0.173
15	WLAN5GHz	802.11ac-VHT80 MCS0	Left Cheek	0mm	Ant 4+5	155	5775	9.40	10.00	1.148	92.00	1.087	-0.02	0.170	0.212
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Tilted	0mm	Ant 4+5	155	5775	9.40	10.00	1.148	92.00	1.087	-0.15	0.169	0.211

<Bluetooth SAR>

WWAN off / WWAN on															
Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	Bluetooth	1Mbps	Right Cheek	0mm	Ant 4	39	2441	17.98	18.00	1.005	76.84	1.084	0.08	0.292	0.318
	Bluetooth	1Mbps	Right Tilted	0mm	Ant 4	39	2441	17.98	18.00	1.005	76.84	1.084	0.09	0.253	0.276
16	Bluetooth	1Mbps	Left Cheek	0mm	Ant 4	39	2441	17.98	18.00	1.005	76.84	1.084	-0.07	0.711	0.774
	Bluetooth	1Mbps	Left Tilted	0mm	Ant 4	39	2441	17.98	18.00	1.005	76.84	1.084	0.02	0.372	0.405



16.2 Hotspot SAR

<GSM SAR>

WiFi off												
Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850_Ant 0	GPRS 4 Tx slots	Front	10mm	189	836.4	28.51	29.00	1.119	-0.02	0.216	0.242
	GSM850_Ant 0	GPRS 4 Tx slots	Back	10mm	189	836.4	28.51	29.00	1.119	-0.07	0.296	0.331
	GSM850_Ant 0	GPRS 4 Tx slots	Left Side	10mm	189	836.4	28.51	29.00	1.119	0	0.130	0.146
	GSM850_Ant 0	GPRS 4 Tx slots	Right Side	10mm	189	836.4	28.51	29.00	1.119	-0.05	0.224	0.251
	GSM850_Ant 0	GPRS 4 Tx slots	Bottom Side	10mm	189	836.4	28.51	29.00	1.119	0.1	0.078	0.087

WiFi on												
Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850_Ant 0	GPRS 4 Tx slots	Front	10mm	189	836.4	26.42	27.00	1.143	-0.03	0.134	0.153
	GSM850_Ant 0	GPRS 4 Tx slots	Back	10mm	189	836.4	26.42	27.00	1.143	-0.08	0.180	0.206
	GSM850_Ant 0	GPRS 4 Tx slots	Left Side	10mm	189	836.4	26.42	27.00	1.143	0.1	0.078	0.089
	GSM850_Ant 0	GPRS 4 Tx slots	Right Side	10mm	189	836.4	26.42	27.00	1.143	0.03	0.142	0.162
	GSM850_Ant 0	GPRS 4 Tx slots	Bottom Side	10mm	189	836.4	26.42	27.00	1.143	-0.06	0.046	0.053

WiFi off												
Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850_Ant 1	GPRS (4 Tx slots)	Front	10mm	189	836.4	28.51	29.00	1.119	-0.16	0.228	0.255
17	GSM850_Ant 1	GPRS (4 Tx slots)	Back	10mm	189	836.4	28.51	29.00	1.119	-0.06	0.305	0.341
	GSM850_Ant 1	GPRS (4 Tx slots)	Left Side	10mm	189	836.4	28.51	29.00	1.119	0.06	0.286	0.320
	GSM850_Ant 1	GPRS (4 Tx slots)	Right Side	10mm	189	836.4	28.51	29.00	1.119	0.04	0.213	0.238
	GSM850_Ant 1	GPRS (4 Tx slots)	Top Side	10mm	189	836.4	28.51	29.00	1.119	-0.13	0.208	0.233

WiFi off												
Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM1900_Ant 0	GPRS 4 Tx slots	Front	10mm	512	1850.2	25.84	26.50	1.164	0	0.612	0.712
	GSM1900_Ant 0	GPRS 4 Tx slots	Back	10mm	512	1850.2	25.84	26.50	1.164	-0.02	0.438	0.510
	GSM1900_Ant 0	GPRS 4 Tx slots	Left Side	10mm	512	1850.2	25.84	26.50	1.164	-0.06	0.122	0.142
	GSM1900_Ant 0	GPRS 4 Tx slots	Right Side	10mm	512	1850.2	25.84	26.50	1.164	0.16	0.083	0.097
18	GSM1900_Ant 0	GPRS 4 Tx slots	Bottom Side	10mm	512	1850.2	25.84	26.50	1.164	0	1.020	1.187
	GSM1900_Ant 0	GPRS 4 Tx slots	Bottom Side	10mm	661	1880	25.81	26.50	1.172	0	0.807	0.946
	GSM1900_Ant 0	GPRS 4 Tx slots	Bottom Side	10mm	810	1909.8	25.78	26.50	1.102	0.02	0.644	0.709

WiFi on												
Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM1900_Ant 0	GPRS 4 Tx slots	Front	10mm	512	1850.2	20.19	20.50	1.074	0.01	0.226	0.243
	GSM1900_Ant 0	GPRS 4 Tx slots	Back	10mm	512	1850.2	20.19	20.50	1.074	0.1	0.124	0.133
	GSM1900_Ant 0	GPRS 4 Tx slots	Left Side	10mm	512	1850.2	20.19	20.50	1.074	0.18	0.035	0.038
	GSM1900_Ant 0	GPRS 4 Tx slots	Right Side	10mm	512	1850.2	20.19	20.50	1.074	0.11	0.028	0.030
	GSM1900_Ant 0	GPRS 4 Tx slots	Bottom Side	10mm	512	1850.2	20.19	20.50	1.074	-0.1	0.263	0.282



<WCDMA SAR>

WiFi off												
Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA II_Ant 0	RMC 12.2Kbps	Front	10mm	9262	1852.4	25.61	25.70	1.021	-0.02	0.842	0.860
	WCDMA II_Ant 0	RMC 12.2Kbps	Front	10mm	9400	1880	25.59	25.70	1.026	0.01	0.763	0.783
	WCDMA II_Ant 0	RMC 12.2Kbps	Front	10mm	9538	1907.6	25.60	25.70	1.023	-0.05	0.859	0.879
	WCDMA II_Ant 0	RMC 12.2Kbps	Back	10mm	9262	1852.4	25.61	25.70	1.021	-0.05	0.562	0.574
	WCDMA II_Ant 0	RMC 12.2Kbps	Left Side	10mm	9262	1852.4	25.61	25.70	1.021	-0.11	0.488	0.498
	WCDMA II_Ant 0	RMC 12.2Kbps	Right Side	10mm	9262	1852.4	25.61	25.70	1.021	-0.13	0.213	0.217
	WCDMA II_Ant 0	RMC 12.2Kbps	Bottom Side	10mm	9262	1852.4	25.61	25.70	1.021	0.07	0.806	0.823
	WCDMA II_Ant 0	RMC 12.2Kbps	Bottom Side	10mm	9400	1880	25.59	25.70	1.026	0.12	0.876	0.898
19	WCDMA II_Ant 0	RMC 12.2Kbps	Bottom Side	10mm	9538	1907.6	25.60	25.70	1.023	-0.03	0.958	0.980

WiFi on												
Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA II_Ant 0	RMC 12.2Kbps	Front	10mm	9400	1880	19.40	19.60	1.047	0.05	0.222	0.232
	WCDMA II_Ant 0	RMC 12.2Kbps	Back	10mm	9400	1880	19.40	19.60	1.047	-0.03	0.192	0.201
	WCDMA II_Ant 0	RMC 12.2Kbps	Left Side	10mm	9400	1880	19.40	19.60	1.047	-0.03	0.147	0.154
	WCDMA II_Ant 0	RMC 12.2Kbps	Right Side	10mm	9400	1880	19.40	19.60	1.047	-0.02	0.063	0.066
	WCDMA II_Ant 0	RMC 12.2Kbps	Bottom Side	10mm	9400	1880	19.40	19.60	1.047	0.08	0.298	0.312

WiFi off												
Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA IV_Ant 0	RMC 12.2Kbps	Front	10mm	1312	1712.4	23.46	24.00	1.132	0.01	0.502	0.568
	WCDMA IV_Ant 0	RMC 12.2Kbps	Back	10mm	1312	1712.4	23.46	24.00	1.132	-0.06	0.494	0.559
	WCDMA IV_Ant 0	RMC 12.2Kbps	Left Side	10mm	1312	1712.4	23.46	24.00	1.132	-0.11	0.177	0.200
	WCDMA IV_Ant 0	RMC 12.2Kbps	Right Side	10mm	1312	1712.4	23.46	24.00	1.132	-0.09	0.096	0.109
20	WCDMA IV_Ant 0	RMC 12.2Kbps	Bottom Side	10mm	1312	1712.4	23.46	24.00	1.132	0.06	0.675	0.764

WiFi on												
Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA IV_Ant 0	RMC 12.2Kbps	Front	10mm	1312	1712.4	19.44	20.00	1.138	0.02	0.201	0.229
	WCDMA IV_Ant 0	RMC 12.2Kbps	Back	10mm	1312	1712.4	19.44	20.00	1.138	-0.07	0.192	0.218
	WCDMA IV_Ant 0	RMC 12.2Kbps	Left Side	10mm	1312	1712.4	19.44	20.00	1.138	-0.09	0.071	0.081
	WCDMA IV_Ant 0	RMC 12.2Kbps	Right Side	10mm	1312	1712.4	19.44	20.00	1.138	0.09	0.040	0.046
	WCDMA IV_Ant 0	RMC 12.2Kbps	Bottom Side	10mm	1312	1712.4	19.44	20.00	1.138	0.03	0.293	0.333

WiFi off												
Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA IV_Ant 1	RMC 12.2Kbps	Front	10mm	1312	1712.4	23.46	24.00	1.132	0.1	0.351	0.397
	WCDMA IV_Ant 1	RMC 12.2Kbps	Back	10mm	1312	1712.4	23.46	24.00	1.132	-0.14	0.403	0.456
	WCDMA IV_Ant 1	RMC 12.2Kbps	Left Side	10mm	1312	1712.4	23.46	24.00	1.132	-0.06	0.217	0.246
	WCDMA IV_Ant 1	RMC 12.2Kbps	Right Side	10mm	1312	1712.4	23.46	24.00	1.132	-0.02	0.014	0.016
	WCDMA IV_Ant 1	RMC 12.2Kbps	Top Side	10mm	1312	1712.4	23.46	24.00	1.132	-0.1	0.267	0.302



<FDD LTE SAR>

WiFi off															
Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 2_Ant 0	20M	QPSK	1	0	Front	10mm	18900	1880	25.12	25.70	1.143	0.17	0.804	0.919
	LTE Band 2_Ant 0	20M	QPSK	1	0	Front	10mm	18700	1860	25.06	25.70	1.159	-0.03	0.749	0.868
	LTE Band 2_Ant 0	20M	QPSK	1	0	Front	10mm	19100	1900	25.11	25.70	1.146	0	0.850	0.974
	LTE Band 2_Ant 0	20M	QPSK	50	0	Front	10mm	18900	1880	24.16	24.70	1.132	-0.05	0.672	0.761
	LTE Band 2_Ant 0	20M	QPSK	50	0	Front	10mm	18700	1860	24.05	24.70	1.161	-0.01	0.623	0.724
	LTE Band 2_Ant 0	20M	QPSK	50	0	Front	10mm	19100	1900	24.05	24.70	1.161	0	0.694	0.806
	LTE Band 2_Ant 0	20M	QPSK	100	0	Front	10mm	18900	1880	24.11	24.70	1.146	-0.02	0.677	0.776
	LTE Band 2_Ant 0	20M	QPSK	1	0	Back	10mm	18900	1880	25.12	25.70	1.143	0.13	0.652	0.745
	LTE Band 2_Ant 0	20M	QPSK	50	0	Back	10mm	18900	1880	24.16	24.70	1.132	-0.02	0.529	0.599
	LTE Band 2_Ant 0	20M	QPSK	1	0	Left Side	10mm	18900	1880	25.12	25.70	1.143	0.02	0.466	0.533
	LTE Band 2_Ant 0	20M	QPSK	50	0	Left Side	10mm	18900	1880	24.16	24.70	1.132	0	0.383	0.434
	LTE Band 2_Ant 0	20M	QPSK	1	0	Right Side	10mm	18900	1880	25.12	25.70	1.143	-0.03	0.160	0.183
	LTE Band 2_Ant 0	20M	QPSK	50	0	Right Side	10mm	18900	1880	24.16	24.70	1.132	-0.07	0.126	0.143
21	LTE Band 2_Ant 0	20M	QPSK	1	0	Bottom Side	10mm	18900	1880	25.12	25.70	1.143	-0.05	0.929	1.062
	LTE Band 2_Ant 0	20M	QPSK	1	0	Bottom Side	10mm	18700	1860	25.06	25.70	1.159	0	0.822	0.953
	LTE Band 2_Ant 0	20M	QPSK	1	0	Bottom Side	10mm	19100	1900	25.11	25.70	1.146	-0.06	0.913	1.046
	LTE Band 2_Ant 0	20M	QPSK	50	0	Bottom Side	10mm	18900	1880	24.16	24.70	1.132	-0.09	0.748	0.847
	LTE Band 2_Ant 0	20M	QPSK	50	0	Bottom Side	10mm	18700	1860	24.05	24.70	1.161	-0.04	0.680	0.790
	LTE Band 2_Ant 0	20M	QPSK	50	0	Bottom Side	10mm	19100	1900	24.05	24.70	1.161	-0.06	0.737	0.856
	LTE Band 2_Ant 0	20M	QPSK	100	0	Bottom Side	10mm	18900	1880	24.11	24.70	1.146	0.04	0.742	0.850
WiFi on															
Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 2_Ant 0	20M	QPSK	1	0	Front	10mm	18900	1880	18.61	19.70	1.285	-0.04	0.189	0.243
	LTE Band 2_Ant 0	20M	QPSK	50	0	Front	10mm	18900	1880	18.60	19.70	1.288	0	0.196	0.252
	LTE Band 2_Ant 0	20M	QPSK	1	0	Back	10mm	18900	1880	18.61	19.70	1.285	-0.04	0.147	0.189
	LTE Band 2_Ant 0	20M	QPSK	50	0	Back	10mm	18900	1880	18.60	19.70	1.288	-0.1	0.150	0.193
	LTE Band 2_Ant 0	20M	QPSK	1	0	Left Side	10mm	18900	1880	18.61	19.70	1.285	-0.04	0.099	0.127
	LTE Band 2_Ant 0	20M	QPSK	50	0	Left Side	10mm	18900	1880	18.60	19.70	1.288	-0.04	0.104	0.134
	LTE Band 2_Ant 0	20M	QPSK	1	0	Right Side	10mm	18900	1880	18.61	19.70	1.285	-0.06	0.036	0.046
	LTE Band 2_Ant 0	20M	QPSK	50	0	Right Side	10mm	18900	1880	18.60	19.70	1.288	0.03	0.035	0.045
	LTE Band 2_Ant 0	20M	QPSK	1	0	Bottom Side	10mm	18900	1880	18.61	19.70	1.285	-0.03	0.218	0.280
	LTE Band 2_Ant 0	20M	QPSK	50	0	Bottom Side	10mm	18900	1880	18.60	19.70	1.288	-0.04	0.223	0.287



WiFi off															
Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 4_Ant 0	20M	QPSK	1	0	Front	10mm	20175	1732.5	23.28	24.50	1.324	-0.07	0.524	0.694
	LTE Band 4_Ant 0	20M	QPSK	50	0	Front	10mm	20175	1732.5	22.29	23.50	1.321	-0.06	0.423	0.559
	LTE Band 4_Ant 0	20M	QPSK	1	0	Back	10mm	20175	1732.5	23.28	24.50	1.324	0	0.511	0.677
	LTE Band 4_Ant 0	20M	QPSK	50	0	Back	10mm	20175	1732.5	22.29	23.50	1.321	-0.03	0.412	0.544
	LTE Band 4_Ant 0	20M	QPSK	1	0	Left Side	10mm	20175	1732.5	23.28	24.50	1.324	-0.11	0.152	0.201
	LTE Band 4_Ant 0	20M	QPSK	50	0	Left Side	10mm	20175	1732.5	22.29	23.50	1.321	-0.04	0.121	0.160
	LTE Band 4_Ant 0	20M	QPSK	1	0	Right Side	10mm	20175	1732.5	23.28	24.50	1.324	-0.09	0.086	0.114
	LTE Band 4_Ant 0	20M	QPSK	50	0	Right Side	10mm	20175	1732.5	22.29	23.50	1.321	-0.12	0.071	0.094
22	LTE Band 4_Ant 0	20M	QPSK	1	0	Bottom Side	10mm	20175	1732.5	23.28	24.50	1.324	-0.07	0.700	0.927
	LTE Band 4_Ant 0	20M	QPSK	50	0	Bottom Side	10mm	20175	1732.5	22.29	23.50	1.321	-0.04	0.555	0.733
	LTE Band 4_Ant 0	20M	QPSK	100	0	Bottom Side	10mm	20175	1732.5	22.26	23.50	1.330	-0.12	0.560	0.745
WiFi on															
Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 4_Ant 0	20M	QPSK	1	0	Front	10mm	20175	1732.5	18.12	19.20	1.282	-0.04	0.133	0.171
	LTE Band 4_Ant 0	20M	QPSK	50	0	Front	10mm	20175	1732.5	18.08	19.20	1.294	-0.01	0.134	0.173
	LTE Band 4_Ant 0	20M	QPSK	1	0	Back	10mm	20175	1732.5	18.12	19.20	1.282	-0.05	0.119	0.153
	LTE Band 4_Ant 0	20M	QPSK	50	0	Back	10mm	20175	1732.5	18.08	19.20	1.294	-0.08	0.120	0.155
	LTE Band 4_Ant 0	20M	QPSK	1	0	Left Side	10mm	20175	1732.5	18.12	19.20	1.282	-0.04	0.051	0.065
	LTE Band 4_Ant 0	20M	QPSK	50	0	Left Side	10mm	20175	1732.5	18.08	19.20	1.294	-0.02	0.052	0.067
	LTE Band 4_Ant 0	20M	QPSK	1	0	Right Side	10mm	20175	1732.5	18.12	19.20	1.282	0.15	0.018	0.023
	LTE Band 4_Ant 0	20M	QPSK	50	0	Right Side	10mm	20175	1732.5	18.08	19.20	1.294	-0.08	0.019	0.025
	LTE Band 4_Ant 0	20M	QPSK	1	0	Bottom Side	10mm	20175	1732.5	18.12	19.20	1.282	-0.08	0.200	0.256
	LTE Band 4_Ant 0	20M	QPSK	50	0	Bottom Side	10mm	20175	1732.5	18.08	19.20	1.294	-0.12	0.202	0.261
WiFi off															
Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 4_Ant 1	20M	QPSK	1	0	Front	10mm	20175	1732.5	23.28	24.50	1.324	-0.1	0.295	0.391
	LTE Band 4_Ant 1	20M	QPSK	50	0	Front	10mm	20175	1732.5	22.29	23.50	1.321	-0.09	0.248	0.328
	LTE Band 4_Ant 1	20M	QPSK	1	0	Back	10mm	20175	1732.5	23.28	24.50	1.324	-0.05	0.372	0.493
	LTE Band 4_Ant 1	20M	QPSK	50	0	Back	10mm	20175	1732.5	22.29	23.50	1.321	-0.07	0.314	0.415
	LTE Band 4_Ant 1	20M	QPSK	1	0	Left Side	10mm	20175	1732.5	23.28	24.50	1.324	-0.01	0.224	0.297
	LTE Band 4_Ant 1	20M	QPSK	50	0	Left Side	10mm	20175	1732.5	22.29	23.50	1.321	-0.01	0.182	0.240
	LTE Band 4_Ant 1	20M	QPSK	1	0	Right Side	10mm	20175	1732.5	23.28	24.50	1.324	-0.08	0.019	0.025
	LTE Band 4_Ant 1	20M	QPSK	50	0	Right Side	10mm	20175	1732.5	22.29	23.50	1.321	0.03	0.016	0.021
	LTE Band 4_Ant 1	20M	QPSK	1	0	Top Side	10mm	20175	1732.5	23.28	24.50	1.324	-0.02	0.301	0.399
	LTE Band 4_Ant 1	20M	QPSK	50	0	Top Side	10mm	20175	1732.5	22.29	23.50	1.321	-0.1	0.252	0.333



WiFi off															
Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 12_Ant 0	10M	QPSK	1	0	Front	10mm	23095	707.5	24.67	25.70	1.268	-0.03	0.268	0.340
	LTE Band 12_Ant 0	10M	QPSK	25	0	Front	10mm	23095	707.5	23.79	24.70	1.233	-0.04	0.220	0.271
23	LTE Band 12_Ant 0	10M	QPSK	1	0	Back	10mm	23095	707.5	24.67	25.70	1.268	-0.09	0.400	0.507
	LTE Band 12_Ant 0	10M	QPSK	25	0	Back	10mm	23095	707.5	23.79	24.70	1.233	-0.08	0.332	0.409
	LTE Band 12_Ant 0	10M	QPSK	1	0	Left Side	10mm	23095	707.5	24.67	25.70	1.268	0.07	0.257	0.326
	LTE Band 12_Ant 0	10M	QPSK	25	0	Left Side	10mm	23095	707.5	23.79	24.70	1.233	-0.06	0.208	0.256
	LTE Band 12_Ant 0	10M	QPSK	1	0	Right Side	10mm	23095	707.5	24.67	25.70	1.268	-0.01	0.233	0.295
	LTE Band 12_Ant 0	10M	QPSK	25	0	Right Side	10mm	23095	707.5	23.79	24.70	1.233	0.02	0.194	0.239
	LTE Band 12_Ant 0	10M	QPSK	1	0	Bottom Side	10mm	23095	707.5	24.67	25.70	1.268	-0.12	0.052	0.066
	LTE Band 12_Ant 0	10M	QPSK	25	0	Bottom Side	10mm	23095	707.5	23.79	24.70	1.233	-0.11	0.043	0.053
WiFi on															
Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 12_Ant 0	10M	QPSK	1	0	Front	10mm	23095	707.5	21.76	22.70	1.242	-0.05	0.127	0.158
	LTE Band 12_Ant 0	10M	QPSK	25	0	Front	10mm	23095	707.5	21.91	22.70	1.199	0.06	0.131	0.157
	LTE Band 12_Ant 0	10M	QPSK	1	0	Back	10mm	23095	707.5	21.76	22.70	1.242	-0.05	0.181	0.225
	LTE Band 12_Ant 0	10M	QPSK	25	0	Back	10mm	23095	707.5	21.91	22.70	1.199	-0.11	0.192	0.230
	LTE Band 12_Ant 0	10M	QPSK	1	0	Left Side	10mm	23095	707.5	21.76	22.70	1.242	0.06	0.113	0.140
	LTE Band 12_Ant 0	10M	QPSK	25	0	Left Side	10mm	23095	707.5	21.91	22.70	1.199	-0.04	0.120	0.144
	LTE Band 12_Ant 0	10M	QPSK	1	0	Right Side	10mm	23095	707.5	21.76	22.70	1.242	0	0.109	0.135
	LTE Band 12_Ant 0	10M	QPSK	25	0	Right Side	10mm	23095	707.5	21.91	22.70	1.199	0	0.115	0.138
	LTE Band 12_Ant 0	10M	QPSK	1	0	Bottom Side	10mm	23095	707.5	21.76	22.70	1.242	0.08	0.032	0.040
	LTE Band 12_Ant 0	10M	QPSK	25	0	Bottom Side	10mm	23095	707.5	21.91	22.70	1.199	0.06	0.033	0.040
WiFi off															
Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 12_Ant 1	10M	QPSK	1	0	Front	10mm	23095	707.5	24.67	25.70	1.268	-0.12	0.166	0.210
	LTE Band 12_Ant 1	10M	QPSK	25	0	Front	10mm	23095	707.5	23.79	24.70	1.233	0.04	0.140	0.173
	LTE Band 12_Ant 1	10M	QPSK	1	0	Back	10mm	23095	707.5	24.67	25.70	1.268	0	0.220	0.279
	LTE Band 12_Ant 1	10M	QPSK	25	0	Back	10mm	23095	707.5	23.79	24.70	1.233	0.03	0.183	0.226
	LTE Band 12_Ant 1	10M	QPSK	1	0	Left Side	10mm	23095	707.5	24.67	25.70	1.268	-0.15	0.243	0.308
	LTE Band 12_Ant 1	10M	QPSK	25	0	Left Side	10mm	23095	707.5	23.79	24.70	1.233	-0.01	0.207	0.255
	LTE Band 12_Ant 1	10M	QPSK	1	0	Right Side	10mm	23095	707.5	24.67	25.70	1.268	-0.05	0.101	0.128
	LTE Band 12_Ant 1	10M	QPSK	25	0	Right Side	10mm	23095	707.5	23.79	24.70	1.233	-0.05	0.083	0.102
	LTE Band 12_Ant 1	10M	QPSK	1	0	Top Side	10mm	23095	707.5	24.67	25.70	1.268	0.05	0.076	0.096
	LTE Band 12_Ant 1	10M	QPSK	25	0	Top Side	10mm	23095	707.5	23.79	24.70	1.233	-0.04	0.064	0.079



WiFi off															
Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 13_Ant 0	10M	QPSK	1	0	Front	10mm	23230	782	24.26	25.30	1.271	-0.09	0.249	0.316
	LTE Band 13_Ant 0	10M	QPSK	25	0	Front	10mm	23230	782	23.31	24.30	1.256	-0.19	0.222	0.279
	LTE Band 13_Ant 0	10M	QPSK	1	0	Back	10mm	23230	782	24.26	25.30	1.271	-0.13	0.354	0.450
	LTE Band 13_Ant 0	10M	QPSK	25	0	Back	10mm	23230	782	23.31	24.30	1.256	0.01	0.312	0.392
	LTE Band 13_Ant 0	10M	QPSK	1	0	Left Side	10mm	23230	782	24.26	25.30	1.271	0.07	0.260	0.330
	LTE Band 13_Ant 0	10M	QPSK	25	0	Left Side	10mm	23230	782	23.31	24.30	1.256	0.04	0.227	0.285
	LTE Band 13_Ant 0	10M	QPSK	1	0	Right Side	10mm	23230	782	24.26	25.30	1.271	-0.01	0.296	0.376
	LTE Band 13_Ant 0	10M	QPSK	25	0	Right Side	10mm	23230	782	23.31	24.30	1.256	0.02	0.258	0.324
	LTE Band 13_Ant 0	10M	QPSK	1	0	Bottom Side	10mm	23230	782	24.26	25.30	1.271	0.09	0.055	0.070
	LTE Band 13_Ant 0	10M	QPSK	25	0	Bottom Side	10mm	23230	782	23.31	24.30	1.256	0.16	0.047	0.059
WiFi on															
Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 13_Ant 0	10M	QPSK	1	0	Front	10mm	23230	782	21.28	22.30	1.265	-0.06	0.140	0.177
	LTE Band 13_Ant 0	10M	QPSK	25	0	Front	10mm	23230	782	21.30	22.30	1.259	-0.01	0.140	0.176
	LTE Band 13_Ant 0	10M	QPSK	1	0	Back	10mm	23230	782	21.28	22.30	1.265	-0.03	0.147	0.186
	LTE Band 13_Ant 0	10M	QPSK	25	0	Back	10mm	23230	782	21.30	22.30	1.259	-0.06	0.148	0.186
	LTE Band 13_Ant 0	10M	QPSK	1	0	Left Side	10mm	23230	782	21.28	22.30	1.265	0.02	0.144	0.182
	LTE Band 13_Ant 0	10M	QPSK	25	0	Left Side	10mm	23230	782	21.30	22.30	1.259	0.04	0.149	0.188
	LTE Band 13_Ant 0	10M	QPSK	1	0	Right Side	10mm	23230	782	21.28	22.30	1.265	0.07	0.176	0.223
	LTE Band 13_Ant 0	10M	QPSK	25	0	Right Side	10mm	23230	782	21.30	22.30	1.259	0.19	0.190	0.239
	LTE Band 13_Ant 0	10M	QPSK	1	0	Bottom Side	10mm	23230	782	21.28	22.30	1.265	-0.02	0.037	0.047
	LTE Band 13_Ant 0	10M	QPSK	25	0	Bottom Side	10mm	23230	782	21.30	22.30	1.259	0	0.039	0.049
WiFi off															
Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 13_Ant 1	10M	QPSK	1	0	Front	10mm	23230	782	24.26	25.30	1.271	-0.15	0.239	0.304
	LTE Band 13_Ant 1	10M	QPSK	25	0	Front	10mm	23230	782	23.31	24.30	1.256	0.03	0.206	0.259
	LTE Band 13_Ant 1	10M	QPSK	1	0	Back	10mm	23230	782	24.26	25.30	1.271	-0.04	0.268	0.341
	LTE Band 13_Ant 1	10M	QPSK	25	0	Back	10mm	23230	782	23.31	24.30	1.256	0.02	0.232	0.291
24	LTE Band 13_Ant 1	10M	QPSK	1	0	Left Side	10mm	23230	782	24.26	25.30	1.271	-0.04	0.364	0.462
	LTE Band 13_Ant 1	10M	QPSK	25	0	Left Side	10mm	23230	782	23.31	24.30	1.256	0	0.313	0.393
	LTE Band 13_Ant 1	10M	QPSK	1	0	Right Side	10mm	23230	782	24.26	25.30	1.271	-0.09	0.239	0.304
	LTE Band 13_Ant 1	10M	QPSK	25	0	Right Side	10mm	23230	782	23.31	24.30	1.256	0.01	0.204	0.256
	LTE Band 13_Ant 1	10M	QPSK	1	0	Top Side	10mm	23230	782	24.26	25.30	1.271	0.01	0.133	0.169
	LTE Band 13_Ant 1	10M	QPSK	25	0	Top Side	10mm	23230	782	23.31	24.30	1.256	0.05	0.118	0.148



WiFi off															
Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 26_Ant 0	15M	QPSK	1	0	Front	10mm	26865	831.5	24.70	25.70	1.259	0.1	0.218	0.274
	LTE Band 26_Ant 0	15M	QPSK	36	0	Front	10mm	26865	831.5	23.73	24.70	1.250	-0.13	0.179	0.224
	LTE Band 26_Ant 0	15M	QPSK	1	0	Back	10mm	26865	831.5	24.70	25.70	1.259	-0.07	0.256	0.322
	LTE Band 26_Ant 0	15M	QPSK	36	0	Back	10mm	26865	831.5	23.73	24.70	1.250	-0.03	0.257	0.321
	LTE Band 26_Ant 0	15M	QPSK	1	0	Left Side	10mm	26865	831.5	24.70	25.70	1.259	0.06	0.177	0.223
	LTE Band 26_Ant 0	15M	QPSK	36	0	Left Side	10mm	26865	831.5	23.73	24.70	1.250	0.06	0.142	0.178
	LTE Band 26_Ant 0	15M	QPSK	1	0	Right Side	10mm	26865	831.5	24.70	25.70	1.259	-0.01	0.197	0.248
	LTE Band 26_Ant 0	15M	QPSK	36	0	Right Side	10mm	26865	831.5	23.73	24.70	1.250	-0.01	0.197	0.246
	LTE Band 26_Ant 0	15M	QPSK	1	0	Bottom Side	10mm	26865	831.5	24.70	25.70	1.259	0.1	0.061	0.077
	LTE Band 26_Ant 0	15M	QPSK	36	0	Bottom Side	10mm	26865	831.5	23.73	24.70	1.250	0.18	0.054	0.068
WiFi on															
Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 26_Ant 0	15M	QPSK	1	0	Front	10mm	26865	831.5	22.57	23.70	1.297	-0.01	0.143	0.185
	LTE Band 26_Ant 0	15M	QPSK	36	20	Front	10mm	26865	831.5	22.47	23.70	1.327	-0.02	0.145	0.192
	LTE Band 26_Ant 0	15M	QPSK	1	0	Back	10mm	26865	831.5	22.57	23.70	1.297	-0.12	0.163	0.211
	LTE Band 26_Ant 0	15M	QPSK	36	20	Back	10mm	26865	831.5	22.47	23.70	1.327	-0.09	0.183	0.243
	LTE Band 26_Ant 0	15M	QPSK	1	0	Left Side	10mm	26865	831.5	22.57	23.70	1.297	0.02	0.109	0.141
	LTE Band 26_Ant 0	15M	QPSK	36	20	Left Side	10mm	26865	831.5	22.47	23.70	1.327	0.03	0.103	0.137
	LTE Band 26_Ant 0	15M	QPSK	1	0	Right Side	10mm	26865	831.5	22.57	23.70	1.297	0	0.154	0.200
	LTE Band 26_Ant 0	15M	QPSK	36	20	Right Side	10mm	26865	831.5	22.47	23.70	1.327	0.04	0.156	0.207
	LTE Band 26_Ant 0	15M	QPSK	1	0	Bottom Side	10mm	26865	831.5	22.57	23.70	1.297	0.17	0.042	0.054
	LTE Band 26_Ant 0	15M	QPSK	36	20	Bottom Side	10mm	26865	831.5	22.47	23.70	1.327	0.11	0.049	0.065
WiFi off															
Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 26_Ant 1	15M	QPSK	1	0	Front	10mm	26865	831.5	24.70	25.70	1.259	-0.04	0.264	0.332
	LTE Band 26_Ant 1	15M	QPSK	36	0	Front	10mm	26865	831.5	23.73	24.70	1.250	-0.18	0.216	0.270
25	LTE Band 26_Ant 1	15M	QPSK	1	0	Back	10mm	26865	831.5	24.70	25.70	1.259	0.01	0.379	0.477
	LTE Band 26_Ant 1	15M	QPSK	36	0	Back	10mm	26865	831.5	23.73	24.70	1.250	-0.04	0.313	0.391
	LTE Band 26_Ant 1	15M	QPSK	1	0	Left Side	10mm	26865	831.5	24.70	25.70	1.259	-0.04	0.288	0.363
	LTE Band 26_Ant 1	15M	QPSK	36	0	Left Side	10mm	26865	831.5	23.73	24.70	1.250	-0.01	0.233	0.291
	LTE Band 26_Ant 1	15M	QPSK	1	0	Right Side	10mm	26865	831.5	24.70	25.70	1.259	-0.03	0.211	0.266
	LTE Band 26_Ant 1	15M	QPSK	36	0	Right Side	10mm	26865	831.5	23.73	24.70	1.250	0.02	0.172	0.215
	LTE Band 26_Ant 1	15M	QPSK	1	0	Top Side	10mm	26865	831.5	24.70	25.70	1.259	0.01	0.208	0.262
	LTE Band 26_Ant 1	15M	QPSK	36	0	Top Side	10mm	26865	831.5	23.73	24.70	1.250	-0.03	0.173	0.216



<TDD LTE SAR>

WiFi off																	
Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 38_Ant 2	20M	QPSK	1	0	Front	10mm	38000	2595	24.57	25.70	1.297	62.90	1.006	-0.02	0.549	0.716
	LTE Band 38_Ant 2	20M	QPSK	50	50	Front	10mm	38000	2595	23.60	24.70	1.288	62.90	1.006	-0.03	0.441	0.572
26	LTE Band 38_Ant 2	20M	QPSK	1	0	Back	10mm	38000	2595	24.57	25.70	1.297	62.90	1.006	-0.15	0.744	0.971
	LTE Band 38_Ant 2	20M	QPSK	50	50	Back	10mm	38000	2595	23.60	24.70	1.288	62.90	1.006	0.14	0.618	0.801
	LTE Band 38_Ant 2	20M	QPSK	100	0	Back	10mm	38000	2595	23.56	24.70	1.300	62.90	1.006	0.13	0.609	0.797
	LTE Band 38_Ant 2	20M	QPSK	1	0	Left Side	10mm	38000	2595	24.57	25.70	1.297	62.90	1.006	-0.15	0.027	0.035
	LTE Band 38_Ant 2	20M	QPSK	50	50	Left Side	10mm	38000	2595	23.60	24.70	1.288	62.90	1.006	0.06	0.024	0.031
	LTE Band 38_Ant 2	20M	QPSK	1	0	Right Side	10mm	38000	2595	24.57	25.70	1.297	62.90	1.006	0.02	0.550	0.718
	LTE Band 38_Ant 2	20M	QPSK	50	50	Right Side	10mm	38000	2595	23.60	24.70	1.288	62.90	1.006	0	0.533	0.691
	LTE Band 38_Ant 2	20M	QPSK	1	0	Bottom Side	10mm	38000	2595	24.57	25.70	1.297	62.90	1.006	-0.17	0.117	0.153
	LTE Band 38_Ant 2	20M	QPSK	50	50	Bottom Side	10mm	38000	2595	23.60	24.70	1.288	62.90	1.006	-0.17	0.117	0.152
WiFi on																	
Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 38_Ant 2	20M	QPSK	1	99	Front	10mm	38000	2595	20.38	21.20	1.208	62.90	1.006	-0.1	0.185	0.225
	LTE Band 38_Ant 2	20M	QPSK	50	50	Front	10mm	38000	2595	20.27	21.20	1.239	62.90	1.006	-0.07	0.184	0.229
	LTE Band 38_Ant 2	20M	QPSK	1	99	Back	10mm	38000	2595	20.38	21.20	1.208	62.90	1.006	0	0.275	0.334
	LTE Band 38_Ant 2	20M	QPSK	50	50	Back	10mm	38000	2595	20.27	21.20	1.239	62.90	1.006	-0.03	0.273	0.340
	LTE Band 38_Ant 2	20M	QPSK	1	99	Left Side	10mm	38000	2595	20.38	21.20	1.208	62.90	1.006	0.06	0.017	0.021
	LTE Band 38_Ant 2	20M	QPSK	50	50	Left Side	10mm	38000	2595	20.27	21.20	1.239	62.90	1.006	-0.03	0.018	0.022
	LTE Band 38_Ant 2	20M	QPSK	1	99	Right Side	10mm	38000	2595	20.38	21.20	1.208	62.90	1.006	0.03	0.246	0.299
	LTE Band 38_Ant 2	20M	QPSK	50	50	Right Side	10mm	38000	2595	20.27	21.20	1.239	62.90	1.006	0.01	0.246	0.307
	LTE Band 38_Ant 2	20M	QPSK	1	99	Bottom Side	10mm	38000	2595	20.38	21.20	1.208	62.90	1.006	-0.1	0.052	0.063
	LTE Band 38_Ant 2	20M	QPSK	50	50	Bottom Side	10mm	38000	2595	20.27	21.20	1.239	62.90	1.006	-0.19	0.051	0.064



WiFi off																	
Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 41_Ant 2	20M	QPSK	1	0	Front	10mm	41490	2680	24.05	25.00	1.245	62.90	1.006	-0.19	0.501	0.627
	LTE Band 41_Ant 2	20M	QPSK	1	0	Front	10mm	39750	2506	23.87	25.00	1.297	62.90	1.006	-0.08	0.390	0.509
	LTE Band 41_Ant 2	20M	QPSK	1	0	Front	10mm	40185	2549.5	23.94	25.00	1.276	62.90	1.006	-0.11	0.404	0.519
	LTE Band 41_Ant 2	20M	QPSK	1	0	Front	10mm	40620	2593	23.92	25.00	1.282	62.90	1.006	-0.04	0.416	0.537
	LTE Band 41_Ant 2	20M	QPSK	1	0	Front	10mm	41055	2636.5	23.97	25.00	1.268	62.90	1.006	0.01	0.446	0.569
	LTE Band 41_Ant 2	20M	QPSK	50	0	Front	10mm	41490	2680	23.06	24.00	1.242	62.90	1.006	-0.04	0.397	0.496
27	LTE Band 41_Ant 2	20M	QPSK	1	0	Back	10mm	41490	2680	24.05	25.00	1.245	62.90	1.006	0.02	0.778	0.974
	LTE Band 41_Ant 2	20M	QPSK	1	0	Back	10mm	39750	2506	23.87	25.00	1.297	62.90	1.006	0.08	0.490	0.639
	LTE Band 41_Ant 2	20M	QPSK	1	0	Back	10mm	40185	2549.5	23.94	25.00	1.276	62.90	1.006	0.09	0.542	0.696
	LTE Band 41_Ant 2	20M	QPSK	1	0	Back	10mm	40620	2593	23.92	25.00	1.282	62.90	1.006	0.06	0.623	0.804
	LTE Band 41_Ant 2	20M	QPSK	1	0	Back	10mm	41055	2636.5	23.97	25.00	1.268	62.90	1.006	0.05	0.734	0.936
	LTE Band 41_Ant 2	20M	QPSK	50	0	Back	10mm	41490	2680	23.06	24.00	1.242	62.90	1.006	0.06	0.636	0.794
	LTE Band 41_Ant 2	20M	QPSK	50	0	Back	10mm	39750	2506	22.91	24.00	1.285	62.90	1.006	-0.02	0.403	0.521
	LTE Band 41_Ant 2	20M	QPSK	50	0	Back	10mm	40185	2549.5	22.95	24.00	1.274	62.90	1.006	0.11	0.436	0.559
	LTE Band 41_Ant 2	20M	QPSK	50	0	Back	10mm	40620	2593	22.92	24.00	1.282	62.90	1.006	0.07	0.499	0.644
	LTE Band 41_Ant 2	20M	QPSK	50	0	Back	10mm	41055	2636.5	23.03	24.00	1.250	62.90	1.006	0.06	0.584	0.735
	LTE Band 41_Ant 2	20M	QPSK	100	0	Back	10mm	41490	2680	23.00	24.00	1.259	62.90	1.006	0.02	0.638	0.808
	LTE Band 41_Ant 2	20M	QPSK	1	0	Left Side	10mm	41490	2680	24.05	25.00	1.245	62.90	1.006	-0.05	0.020	0.025
	LTE Band 41_Ant 2	20M	QPSK	50	0	Left Side	10mm	41490	2680	23.06	24.00	1.242	62.90	1.006	-0.12	0.016	0.020
	LTE Band 41_Ant 2	20M	QPSK	1	0	Right Side	10mm	41490	2680	24.05	25.00	1.245	62.90	1.006	0.12	0.703	0.880
	LTE Band 41_Ant 2	20M	QPSK	1	0	Right Side	10mm	39750	2506	23.87	25.00	1.297	62.90	1.006	0.07	0.486	0.634
	LTE Band 41_Ant 2	20M	QPSK	1	0	Right Side	10mm	40185	2549.5	23.94	25.00	1.276	62.90	1.006	0.03	0.471	0.605
	LTE Band 41_Ant 2	20M	QPSK	1	0	Right Side	10mm	40620	2593	23.92	25.00	1.282	62.90	1.006	0.05	0.556	0.717
	LTE Band 41_Ant 2	20M	QPSK	1	0	Right Side	10mm	41055	2636.5	23.97	25.00	1.268	62.90	1.006	0.03	0.635	0.810
	LTE Band 41_Ant 2	20M	QPSK	50	0	Right Side	10mm	41490	2680	23.06	24.00	1.242	62.90	1.006	0.07	0.477	0.596
	LTE Band 41_Ant 2	20M	QPSK	100	0	Right Side	10mm	41490	2680	23.00	24.00	1.259	62.90	1.006	0.02	0.471	0.597
	LTE Band 41_Ant 2	20M	QPSK	1	0	Bottom Side	10mm	41490	2680	24.05	25.00	1.245	62.90	1.006	-0.13	0.117	0.146
	LTE Band 41_Ant 2	20M	QPSK	50	0	Bottom Side	10mm	41490	2680	23.06	24.00	1.242	62.90	1.006	-0.13	0.093	0.116
WiFi on																	
Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 41_Ant 2	20M	QPSK	1	0	Front	10mm	41490	2680	19.70	20.50	1.202	62.90	1.006	-0.06	0.164	0.198
	LTE Band 41_Ant 2	20M	QPSK	50	0	Front	10mm	41490	2680	19.68	20.50	1.208	62.90	1.006	-0.06	0.159	0.193
	LTE Band 41_Ant 2	20M	QPSK	1	0	Back	10mm	41490	2680	19.70	20.50	1.202	62.90	1.006	0.13	0.286	0.346
	LTE Band 41_Ant 2	20M	QPSK	50	0	Back	10mm	41490	2680	19.68	20.50	1.208	62.90	1.006	0.09	0.280	0.340
	LTE Band 41_Ant 2	20M	QPSK	1	0	Left Side	10mm	41490	2680	19.70	20.50	1.202	62.90	1.006	0.19	0.011	0.013
	LTE Band 41_Ant 2	20M	QPSK	50	0	Left Side	10mm	41490	2680	19.68	20.50	1.208	62.90	1.006	0.06	0.012	0.015
	LTE Band 41_Ant 2	20M	QPSK	1	0	Right Side	10mm	41490	2680	19.70	20.50	1.202	62.90	1.006	0.06	0.259	0.313
	LTE Band 41_Ant 2	20M	QPSK	50	0	Right Side	10mm	41490	2680	19.68	20.50	1.208	62.90	1.006	0.16	0.259	0.315
	LTE Band 41_Ant 2	20M	QPSK	1	0	Bottom Side	10mm	41490	2680	19.70	20.50	1.202	62.90	1.006	-0.11	0.040	0.048
	LTE Band 41_Ant 2	20M	QPSK	50	0	Bottom Side	10mm	41490	2680	19.68	20.50	1.208	62.90	1.006	-0.09	0.041	0.050



<WLAN SAR>

WWAN off / WWAN on															
Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Front	10mm	Ant 4	6	2437	17.90	18.00	1.023	99.20	1.008	-0.19	0.132	0.136
	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	Ant 4	6	2437	17.90	18.00	1.023	99.20	1.008	-0.16	0.229	0.236
	WLAN2.4GHz	802.11b 1Mbps	Right Side	10mm	Ant 4	6	2437	17.90	18.00	1.023	99.20	1.008	-0.13	0.110	0.113
	WLAN2.4GHz	802.11b 1Mbps	Top Side	10mm	Ant 4	6	2437	17.90	18.00	1.023	99.20	1.008	-0.19	0.076	0.078
	WLAN2.4GHz	802.11b 1Mbps	Front	10mm	Ant 5	6	2437	17.80	18.00	1.047	99.20	1.008	-0.13	0.113	0.119
	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	Ant 5	6	2437	17.80	18.00	1.047	99.20	1.008	-0.1	0.238	0.251
	WLAN2.4GHz	802.11b 1Mbps	Right Side	10mm	Ant 5	6	2437	17.80	18.00	1.047	99.20	1.008	-0.19	0.148	0.156
	WLAN2.4GHz	802.11b 1Mbps	Top Side	10mm	Ant 5	6	2437	17.80	18.00	1.047	99.20	1.008	0.15	0.027	0.028
	WLAN2.4GHz	802.11b 1Mbps	Front	10mm	Ant 4+5	1	2412	17.90	18.00	1.023	99.20	1.008	-0.16	0.255	0.263
28	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	Ant 4+5	1	2412	17.90	18.00	1.023	99.20	1.008	-0.12	0.336	0.347
	WLAN2.4GHz	802.11b 1Mbps	Right Side	10mm	Ant 4+5	1	2412	17.90	18.00	1.023	99.20	1.008	-0.16	0.318	0.328
	WLAN2.4GHz	802.11b 1Mbps	Top Side	10mm	Ant 4+5	1	2412	17.90	18.00	1.023	99.20	1.008	-0.15	0.113	0.117
	WLAN5GHz	802.11n-HT40 MCS0	Front	10mm	Ant 4	46	5230	17.40	17.50	1.023	96.46	1.037	-0.05	0.246	0.261
	WLAN5GHz	802.11n-HT40 MCS0	Back	10mm	Ant 4	46	5230	17.40	17.50	1.023	96.46	1.037	-0.01	0.314	0.333
	WLAN5GHz	802.11n-HT40 MCS0	Right Side	10mm	Ant 4	46	5230	17.40	17.50	1.023	96.46	1.037	0.05	0.091	0.097
	WLAN5GHz	802.11n-HT40 MCS0	Top Side	10mm	Ant 4	46	5230	17.40	17.50	1.023	96.46	1.037	-0.01	0.231	0.245
	WLAN5GHz	802.11n-HT40 MCS0	Front	10mm	Ant 5	46	5230	17.30	17.50	1.047	96.45	1.037	0	0.114	0.124
29	WLAN5GHz	802.11n-HT40 MCS0	Back	10mm	Ant 5	46	5230	17.30	17.50	1.047	96.45	1.037	-0.05	0.617	0.670
	WLAN5GHz	802.11n-HT40 MCS0	Right Side	10mm	Ant 5	46	5230	17.30	17.50	1.047	96.45	1.037	-0.05	0.530	0.576
	WLAN5GHz	802.11n-HT40 MCS0	Top Side	10mm	Ant 5	46	5230	17.30	17.50	1.047	96.45	1.037	-0.09	0.127	0.138
	WLAN5GHz	802.11n-HT40 MCS0	Front	10mm	Ant 4+5	46	5230	16.90	17.50	1.148	96.45	1.037	-0.01	0.294	0.350
	WLAN5GHz	802.11n-HT40 MCS0	Back	10mm	Ant 4+5	46	5230	16.90	17.50	1.148	96.45	1.037	-0.06	0.541	0.644
	WLAN5GHz	802.11n-HT40 MCS0	Right Side	10mm	Ant 4+5	46	5230	16.90	17.50	1.148	96.45	1.037	-0.18	0.484	0.576
	WLAN5GHz	802.11n-HT40 MCS0	Top Side	10mm	Ant 4+5	46	5230	16.90	17.50	1.148	96.45	1.037	-0.11	0.424	0.505
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	10mm	Ant 4	155	5775	17.40	17.50	1.023	92.00	1.087	-0.16	0.134	0.149
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	10mm	Ant 4	155	5775	17.40	17.50	1.023	92.00	1.087	-0.06	0.143	0.159
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Side	10mm	Ant 4	155	5775	17.40	17.50	1.023	92.00	1.087	0.02	0.038	0.042
	WLAN5GHz	802.11ac-VHT80 MCS0	Top Side	10mm	Ant 4	155	5775	17.40	17.50	1.023	92.00	1.087	-0.11	0.124	0.138
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	10mm	Ant 5	155	5775	17.40	17.50	1.023	92.00	1.087	-0.11	0.062	0.069
30	WLAN5GHz	802.11ac-VHT80 MCS0	Back	10mm	Ant 5	155	5775	17.40	17.50	1.023	92.00	1.087	-0.18	0.561	0.624
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Side	10mm	Ant 5	155	5775	17.40	17.50	1.023	92.00	1.087	0.1	0.022	0.024
	WLAN5GHz	802.11ac-VHT80 MCS0	Top Side	10mm	Ant 5	155	5775	17.40	17.50	1.023	92.00	1.087	-0.07	0.086	0.096
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	10mm	Ant 4+5	155	5775	17.20	17.50	1.072	92.00	1.087	-0.04	0.173	0.202
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	10mm	Ant 4+5	155	5775	17.20	17.50	1.072	92.00	1.087	-0.01	0.420	0.489
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Side	10mm	Ant 4+5	155	5775	17.20	17.50	1.072	92.00	1.087	-0.03	0.355	0.413
	WLAN5GHz	802.11ac-VHT80 MCS0	Top Side	10mm	Ant 4+5	155	5775	17.20	17.50	1.072	92.00	1.087	-0.03	0.207	0.241

<Bluetooth SAR>

WWAN off / WWAN on															
Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	Bluetooth	1Mbps	Front	10mm	Ant 4	39	2441	17.98	18.00	1.005	76.84	1.084	-0.06	0.133	0.145
31	Bluetooth	1Mbps	Back	10mm	Ant 4	39	2441	17.98	18.00	1.005	76.84	1.084	0.11	0.155	0.169
	Bluetooth	1Mbps	Right Side	10mm	Ant 4	39	2441	17.98	18.00	1.005	76.84	1.084	0.13	0.062	0.068
	Bluetooth	1Mbps	Top Side	10mm	Ant 4	39	2441	17.98	18.00	1.005	76.84	1.084	0.09	0.072	0.078



16.3 Body Worn Accessory SAR

<GSM SAR>

WiFi off												
Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850_Ant 0	GPRS 4 Tx slots	Front	10mm	189	836.4	28.51	29.00	1.119	-0.02	0.216	0.242
	GSM850_Ant 0	GPRS 4 Tx slots	Back	10mm	189	836.4	28.51	29.00	1.119	-0.07	0.296	0.331
WiFi on												
Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850_Ant 0	GPRS 4 Tx slots	Front	10mm	189	836.4	26.42	27.00	1.143	-0.03	0.134	0.153
	GSM850_Ant 0	GPRS 4 Tx slots	Back	10mm	189	836.4	26.42	27.00	1.143	-0.08	0.180	0.206
WiFi off												
Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850_Ant 1	GPRS (4 Tx slots)	Front	10mm	189	836.4	28.51	29.00	1.119	-0.16	0.228	0.255
32	GSM850_Ant 1	GPRS (4 Tx slots)	Back	10mm	189	836.4	28.51	29.00	1.119	-0.06	0.305	0.341

WiFi off												
Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
33	GSM1900_Ant 0	GPRS 4 Tx slots	Front	10mm	512	1850.2	25.84	26.50	1.164	0	0.612	0.712
	GSM1900_Ant 0	GPRS 4 Tx slots	Back	10mm	512	1850.2	25.84	26.50	1.164	-0.02	0.438	0.510
WiFi on												
Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM1900_Ant 0	GPRS 4 Tx slots	Front	10mm	512	1850.2	20.19	20.50	1.074	0.01	0.226	0.243
	GSM1900_Ant 0	GPRS 4 Tx slots	Back	10mm	512	1850.2	20.19	20.50	1.074	0.1	0.124	0.133

<WCDMA SAR>

WiFi off												
Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA II_Ant 0	RMC 12.2Kbps	Front	10mm	9262	1852.4	25.61	25.70	1.021	-0.02	0.842	0.860
	WCDMA II_Ant 0	RMC 12.2Kbps	Front	10mm	9400	1880	25.59	25.70	1.026	0.01	0.763	0.783
34	WCDMA II_Ant 0	RMC 12.2Kbps	Front	10mm	9538	1907.6	25.60	25.70	1.023	-0.05	0.859	0.879
	WCDMA II_Ant 0	RMC 12.2Kbps	Back	10mm	9262	1852.4	25.61	25.70	1.021	-0.05	0.562	0.574
WiFi on												
Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA II_Ant 0	RMC 12.2Kbps	Front	10mm	9400	1880	19.40	19.60	1.047	0.05	0.222	0.232
	WCDMA II_Ant 0	RMC 12.2Kbps	Back	10mm	9400	1880	19.40	19.60	1.047	-0.03	0.192	0.201



WiFi off												
Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
35	WCDMA IV_Ant 0	RMC 12.2Kbps	Front	10mm	1312	1712.4	23.46	24.00	1.132	0.01	0.502	0.568
	WCDMA IV_Ant 0	RMC 12.2Kbps	Back	10mm	1312	1712.4	23.46	24.00	1.132	-0.06	0.494	0.559
WiFi on												
Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA IV_Ant 0	RMC 12.2Kbps	Front	10mm	1312	1712.4	19.44	20.00	1.138	0.02	0.201	0.229
	WCDMA IV_Ant 0	RMC 12.2Kbps	Back	10mm	1312	1712.4	19.44	20.00	1.138	-0.07	0.192	0.218
WiFi off												
Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA IV_Ant 1	RMC 12.2Kbps	Front	10mm	1312	1712.4	23.46	24.00	1.132	0.1	0.351	0.397
	WCDMA IV_Ant 1	RMC 12.2Kbps	Back	10mm	1312	1712.4	23.46	24.00	1.132	-0.14	0.403	0.456

<FDD LTE SAR>

WiFi off															
Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 2_Ant 0	20M	QPSK	1	0	Front	10mm	18900	1880	25.12	25.70	1.143	0.17	0.804	0.919
	LTE Band 2_Ant 0	20M	QPSK	1	0	Front	10mm	18700	1860	25.06	25.70	1.159	-0.03	0.749	0.868
36	LTE Band 2_Ant 0	20M	QPSK	1	0	Front	10mm	19100	1900	25.11	25.70	1.146	0	0.850	0.974
	LTE Band 2_Ant 0	20M	QPSK	50	0	Front	10mm	18900	1880	24.16	24.70	1.132	-0.05	0.672	0.761
	LTE Band 2_Ant 0	20M	QPSK	50	0	Front	10mm	18700	1860	24.05	24.70	1.161	-0.01	0.623	0.724
	LTE Band 2_Ant 0	20M	QPSK	50	0	Front	10mm	19100	1900	24.05	24.70	1.161	0	0.694	0.806
	LTE Band 2_Ant 0	20M	QPSK	100	0	Front	10mm	18900	1880	24.11	24.70	1.146	-0.02	0.677	0.776
	LTE Band 2_Ant 0	20M	QPSK	1	0	Back	10mm	18900	1880	25.12	25.70	1.143	0.13	0.652	0.745
	LTE Band 2_Ant 0	20M	QPSK	50	0	Back	10mm	18900	1880	24.16	24.70	1.132	-0.02	0.529	0.599
WiFi on															
Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 2_Ant 0	20M	QPSK	1	0	Front	10mm	18900	1880	18.61	19.70	1.285	-0.04	0.189	0.243
	LTE Band 2_Ant 0	20M	QPSK	50	0	Front	10mm	18900	1880	18.60	19.70	1.288	0	0.196	0.252
	LTE Band 2_Ant 0	20M	QPSK	1	0	Back	10mm	18900	1880	18.61	19.70	1.285	-0.04	0.147	0.189
	LTE Band 2_Ant 0	20M	QPSK	50	0	Back	10mm	18900	1880	18.60	19.70	1.288	-0.1	0.150	0.193



WiFi off															
Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
37	LTE Band 4_Ant 0	20M	QPSK	1	0	Front	10mm	20175	1732.5	23.28	24.50	1.324	-0.07	0.524	0.694
	LTE Band 4_Ant 0	20M	QPSK	50	0	Front	10mm	20175	1732.5	22.29	23.50	1.321	-0.06	0.423	0.559
	LTE Band 4_Ant 0	20M	QPSK	1	0	Back	10mm	20175	1732.5	23.28	24.50	1.324	0	0.511	0.677
	LTE Band 4_Ant 0	20M	QPSK	50	0	Back	10mm	20175	1732.5	22.29	23.50	1.321	-0.03	0.412	0.544
WiFi on															
Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 4_Ant 0	20M	QPSK	1	0	Front	10mm	20175	1732.5	18.12	19.20	1.282	-0.04	0.133	0.171
	LTE Band 4_Ant 0	20M	QPSK	50	0	Front	10mm	20175	1732.5	18.08	19.20	1.294	-0.01	0.134	0.173
	LTE Band 4_Ant 0	20M	QPSK	1	0	Back	10mm	20175	1732.5	18.12	19.20	1.282	-0.05	0.119	0.153
	LTE Band 4_Ant 0	20M	QPSK	50	0	Back	10mm	20175	1732.5	18.08	19.20	1.294	-0.08	0.120	0.155
WiFi off															
Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 4_Ant 1	20M	QPSK	1	0	Front	10mm	20175	1732.5	23.28	24.50	1.324	-0.1	0.295	0.391
	LTE Band 4_Ant 1	20M	QPSK	50	0	Front	10mm	20175	1732.5	22.29	23.50	1.321	-0.09	0.248	0.328
	LTE Band 4_Ant 1	20M	QPSK	1	0	Back	10mm	20175	1732.5	23.28	24.50	1.324	-0.05	0.372	0.493
	LTE Band 4_Ant 1	20M	QPSK	50	0	Back	10mm	20175	1732.5	22.29	23.50	1.321	-0.07	0.314	0.415

WiFi off															
Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 12_Ant 0	10M	QPSK	1	0	Front	10mm	23095	707.5	24.67	25.70	1.268	-0.03	0.268	0.340
	LTE Band 12_Ant 0	10M	QPSK	25	0	Front	10mm	23095	707.5	23.79	24.70	1.233	-0.04	0.220	0.271
38	LTE Band 12_Ant 0	10M	QPSK	1	0	Back	10mm	23095	707.5	24.67	25.70	1.268	-0.09	0.400	0.507
	LTE Band 12_Ant 0	10M	QPSK	25	0	Back	10mm	23095	707.5	23.79	24.70	1.233	-0.08	0.332	0.409
WiFi on															
Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 12_Ant 0	10M	QPSK	1	0	Front	10mm	23095	707.5	21.76	22.70	1.242	-0.05	0.127	0.158
	LTE Band 12_Ant 0	10M	QPSK	25	0	Front	10mm	23095	707.5	21.91	22.70	1.199	0.06	0.131	0.157
	LTE Band 12_Ant 0	10M	QPSK	1	0	Back	10mm	23095	707.5	21.76	22.70	1.242	-0.05	0.181	0.225
	LTE Band 12_Ant 0	10M	QPSK	25	0	Back	10mm	23095	707.5	21.91	22.70	1.199	-0.11	0.192	0.230
WiFi off															
Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 12_Ant 1	10M	QPSK	1	0	Front	10mm	23095	707.5	24.67	25.70	1.268	-0.12	0.166	0.210
	LTE Band 12_Ant 1	10M	QPSK	25	0	Front	10mm	23095	707.5	23.79	24.70	1.233	0.04	0.140	0.173
	LTE Band 12_Ant 1	10M	QPSK	1	0	Back	10mm	23095	707.5	24.67	25.70	1.268	0	0.220	0.279
	LTE Band 12_Ant 1	10M	QPSK	25	0	Back	10mm	23095	707.5	23.79	24.70	1.233	0.03	0.183	0.226



WiFi off															
Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 13_Ant 0	10M	QPSK	1	0	Front	10mm	23230	782	24.26	25.30	1.271	-0.09	0.249	0.316
	LTE Band 13_Ant 0	10M	QPSK	25	0	Front	10mm	23230	782	23.31	24.30	1.256	-0.19	0.222	0.279
39	LTE Band 13_Ant 0	10M	QPSK	1	0	Back	10mm	23230	782	24.26	25.30	1.271	-0.13	0.354	0.450
	LTE Band 13_Ant 0	10M	QPSK	25	0	Back	10mm	23230	782	23.31	24.30	1.256	0.01	0.312	0.392
WiFi on															
Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 13_Ant 0	10M	QPSK	1	0	Front	10mm	23230	782	21.28	22.30	1.265	-0.06	0.140	0.177
	LTE Band 13_Ant 0	10M	QPSK	25	0	Front	10mm	23230	782	21.30	22.30	1.259	-0.01	0.140	0.176
	LTE Band 13_Ant 0	10M	QPSK	1	0	Back	10mm	23230	782	21.28	22.30	1.265	-0.03	0.147	0.186
	LTE Band 13_Ant 0	10M	QPSK	25	0	Back	10mm	23230	782	21.30	22.30	1.259	-0.06	0.148	0.186
WiFi off															
Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 13_Ant 1	10M	QPSK	1	0	Front	10mm	23230	782	24.26	25.30	1.271	-0.15	0.239	0.304
	LTE Band 13_Ant 1	10M	QPSK	25	0	Front	10mm	23230	782	23.31	24.30	1.256	0.03	0.206	0.259
	LTE Band 13_Ant 1	10M	QPSK	1	0	Back	10mm	23230	782	24.26	25.30	1.271	-0.04	0.268	0.341
	LTE Band 13_Ant 1	10M	QPSK	25	0	Back	10mm	23230	782	23.31	24.30	1.256	0.02	0.232	0.291

WiFi off															
Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 26_Ant 0	15M	QPSK	1	0	Front	10mm	26865	831.5	24.70	25.70	1.259	0.1	0.218	0.274
	LTE Band 26_Ant 0	15M	QPSK	36	0	Front	10mm	26865	831.5	23.73	24.70	1.250	-0.13	0.179	0.224
	LTE Band 26_Ant 0	15M	QPSK	1	0	Back	10mm	26865	831.5	24.70	25.70	1.259	-0.07	0.256	0.322
	LTE Band 26_Ant 0	15M	QPSK	36	0	Back	10mm	26865	831.5	23.73	24.70	1.250	-0.03	0.257	0.321
WiFi on															
Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 26_Ant 0	15M	QPSK	1	0	Front	10mm	26865	831.5	22.57	23.70	1.297	-0.01	0.143	0.185
	LTE Band 26_Ant 0	15M	QPSK	36	20	Front	10mm	26865	831.5	22.47	23.70	1.327	-0.02	0.145	0.192
	LTE Band 26_Ant 0	15M	QPSK	1	0	Back	10mm	26865	831.5	22.57	23.70	1.297	-0.12	0.163	0.211
	LTE Band 26_Ant 0	15M	QPSK	36	20	Back	10mm	26865	831.5	22.47	23.70	1.327	-0.09	0.183	0.243
WiFi off															
Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 26_Ant 1	15M	QPSK	1	0	Front	10mm	26865	831.5	24.70	25.70	1.259	-0.04	0.264	0.332
	LTE Band 26_Ant 1	15M	QPSK	36	0	Front	10mm	26865	831.5	23.73	24.70	1.250	-0.18	0.216	0.270
40	LTE Band 26_Ant 1	15M	QPSK	1	0	Back	10mm	26865	831.5	24.70	25.70	1.259	0.01	0.379	0.477
	LTE Band 26_Ant 1	15M	QPSK	36	0	Back	10mm	26865	831.5	23.73	24.70	1.250	-0.04	0.313	0.391



<TDD LTE SAR>

WiFi off																	
Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 38_Ant 2	20M	QPSK	1	0	Front	10mm	38000	2595	24.57	25.70	1.297	62.90	1.006	-0.02	0.549	0.716
	LTE Band 38_Ant 2	20M	QPSK	50	50	Front	10mm	38000	2595	23.60	24.70	1.288	62.90	1.006	-0.03	0.441	0.572
41	LTE Band 38_Ant 2	20M	QPSK	1	0	Back	10mm	38000	2595	24.57	25.70	1.297	62.90	1.006	-0.15	0.744	0.971
	LTE Band 38_Ant 2	20M	QPSK	50	50	Back	10mm	38000	2595	23.60	24.70	1.288	62.90	1.006	0.14	0.618	0.801
	LTE Band 38_Ant 2	20M	QPSK	100	0	Back	10mm	38000	2595	23.56	24.70	1.300	62.90	1.006	0.13	0.609	0.797
WiFi on																	
Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 38_Ant 2	20M	QPSK	1	99	Front	10mm	38000	2595	20.38	21.20	1.208	62.90	1.006	-0.1	0.185	0.225
	LTE Band 38_Ant 2	20M	QPSK	50	50	Front	10mm	38000	2595	20.27	21.20	1.239	62.90	1.006	-0.07	0.184	0.229
	LTE Band 38_Ant 2	20M	QPSK	1	99	Back	10mm	38000	2595	20.38	21.20	1.208	62.90	1.006	0	0.275	0.334
	LTE Band 38_Ant 2	20M	QPSK	50	50	Back	10mm	38000	2595	20.27	21.20	1.239	62.90	1.006	-0.03	0.273	0.340

WiFi off																	
Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 41_Ant 2	20M	QPSK	1	0	Front	10mm	41490	2680	24.05	25.00	1.245	62.90	1.006	-0.19	0.501	0.627
	LTE Band 41_Ant 2	20M	QPSK	1	0	Front	10mm	39750	2506	23.87	25.00	1.297	62.90	1.006	-0.08	0.390	0.509
	LTE Band 41_Ant 2	20M	QPSK	1	0	Front	10mm	40185	2549.5	23.94	25.00	1.276	62.90	1.006	-0.11	0.404	0.519
	LTE Band 41_Ant 2	20M	QPSK	1	0	Front	10mm	40620	2593	23.92	25.00	1.282	62.90	1.006	-0.04	0.416	0.537
	LTE Band 41_Ant 2	20M	QPSK	1	0	Front	10mm	41055	2636.5	23.97	25.00	1.268	62.90	1.006	0.01	0.446	0.569
	LTE Band 41_Ant 2	20M	QPSK	50	0	Front	10mm	41490	2680	23.06	24.00	1.242	62.90	1.006	-0.04	0.397	0.496
42	LTE Band 41_Ant 2	20M	QPSK	1	0	Back	10mm	41490	2680	24.05	25.00	1.245	62.90	1.006	0.02	0.778	0.974
	LTE Band 41_Ant 2	20M	QPSK	1	0	Back	10mm	39750	2506	23.87	25.00	1.297	62.90	1.006	0.08	0.490	0.639
	LTE Band 41_Ant 2	20M	QPSK	1	0	Back	10mm	40185	2549.5	23.94	25.00	1.276	62.90	1.006	0.09	0.542	0.696
	LTE Band 41_Ant 2	20M	QPSK	1	0	Back	10mm	40620	2593	23.92	25.00	1.282	62.90	1.006	0.06	0.623	0.804
	LTE Band 41_Ant 2	20M	QPSK	1	0	Back	10mm	41055	2636.5	23.97	25.00	1.268	62.90	1.006	0.05	0.734	0.936
	LTE Band 41_Ant 2	20M	QPSK	50	0	Back	10mm	41490	2680	23.06	24.00	1.242	62.90	1.006	0.06	0.636	0.794
	LTE Band 41_Ant 2	20M	QPSK	50	0	Back	10mm	39750	2506	22.91	24.00	1.285	62.90	1.006	-0.02	0.403	0.521
	LTE Band 41_Ant 2	20M	QPSK	50	0	Back	10mm	40185	2549.5	22.95	24.00	1.274	62.90	1.006	0.11	0.436	0.559
	LTE Band 41_Ant 2	20M	QPSK	50	0	Back	10mm	40620	2593	22.92	24.00	1.282	62.90	1.006	0.07	0.499	0.644
	LTE Band 41_Ant 2	20M	QPSK	50	0	Back	10mm	41055	2636.5	23.03	24.00	1.250	62.90	1.006	0.06	0.584	0.735
	LTE Band 41_Ant 2	20M	QPSK	100	0	Back	10mm	41490	2680	23.00	24.00	1.259	62.90	1.006	0.02	0.638	0.808
WiFi on																	
Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 41_Ant 2	20M	QPSK	1	0	Front	10mm	41490	2680	19.70	20.50	1.202	62.90	1.006	-0.06	0.164	0.198
	LTE Band 41_Ant 2	20M	QPSK	50	0	Front	10mm	41490	2680	19.68	20.50	1.208	62.90	1.006	-0.06	0.159	0.193
	LTE Band 41_Ant 2	20M	QPSK	1	0	Back	10mm	41490	2680	19.70	20.50	1.202	62.90	1.006	0.13	0.286	0.346
	LTE Band 41_Ant 2	20M	QPSK	50	0	Back	10mm	41490	2680	19.68	20.50	1.208	62.90	1.006	0.09	0.280	0.340



<WLAN SAR>

WWAN off / WWAN on															
Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Front	10mm	Ant 4	6	2437	17.90	18.00	1.023	99.20	1.008	-0.19	0.132	0.136
	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	Ant 4	6	2437	17.90	18.00	1.023	99.20	1.008	-0.16	0.229	0.236
	WLAN2.4GHz	802.11b 1Mbps	Front	10mm	Ant 5	6	2437	17.80	18.00	1.047	99.20	1.008	-0.13	0.113	0.119
	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	Ant 5	6	2437	17.80	18.00	1.047	99.20	1.008	-0.1	0.238	0.251
	WLAN2.4GHz	802.11b 1Mbps	Front	10mm	Ant 4+5	1	2412	17.90	18.00	1.023	99.20	1.008	-0.16	0.255	0.263
43	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	Ant 4+5	1	2412	17.90	18.00	1.023	99.20	1.008	-0.12	0.336	0.347
	WLAN5GHz	802.11n-HT40 MCS0	Front	10mm	Ant 4	54	5270	17.20	17.50	1.072	96.46	1.037	0.11	0.223	0.248
	WLAN5GHz	802.11n-HT40 MCS0	Back	10mm	Ant 4	54	5270	17.20	17.50	1.072	96.46	1.037	-0.18	0.264	0.293
	WLAN5GHz	802.11n-HT40 MCS0	Front	10mm	Ant 5	54	5270	17.30	17.50	1.047	96.45	1.037	-0.19	0.125	0.136
44	WLAN5GHz	802.11n-HT40 MCS0	Back	10mm	Ant 5	54	5270	17.30	17.50	1.047	96.45	1.037	-0.12	0.631	0.685
	WLAN5GHz	802.11n-HT40 MCS0	Front	10mm	Ant 4+5	54	5270	17.00	17.50	1.122	96.45	1.037	0.02	0.254	0.296
	WLAN5GHz	802.11n-HT40 MCS0	Back	10mm	Ant 4+5	54	5270	17.00	17.50	1.122	96.45	1.037	-0.14	0.546	0.635
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	10mm	Ant 4	122	5610	17.40	17.50	1.023	92.00	1.087	-0.15	0.248	0.276
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	10mm	Ant 4	122	5610	17.40	17.50	1.023	92.00	1.087	-0.06	0.250	0.278
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	10mm	Ant 5	122	5610	17.40	17.50	1.023	92.00	1.087	-0.08	0.071	0.079
45	WLAN5GHz	802.11ac-VHT80 MCS0	Back	10mm	Ant 5	122	5610	17.40	17.50	1.023	92.00	1.087	-0.11	0.451	0.502
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	10mm	Ant 4+5	122	5610	17.10	17.50	1.096	92.00	1.087	-0.03	0.337	0.402
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	10mm	Ant 4+5	122	5610	17.10	17.50	1.096	92.00	1.087	-0.09	0.395	0.471
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	10mm	Ant 4	155	5775	17.40	17.50	1.023	92.00	1.087	-0.16	0.134	0.149
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	10mm	Ant 4	155	5775	17.40	17.50	1.023	92.00	1.087	-0.06	0.143	0.159
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	10mm	Ant 5	155	5775	17.40	17.50	1.023	92.00	1.087	-0.11	0.062	0.069
46	WLAN5GHz	802.11ac-VHT80 MCS0	Back	10mm	Ant 5	155	5775	17.40	17.50	1.023	92.00	1.087	-0.18	0.561	0.624
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	10mm	Ant 4+5	155	5775	17.20	17.50	1.072	92.00	1.087	-0.04	0.173	0.202
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	10mm	Ant 4+5	155	5775	17.20	17.50	1.072	92.00	1.087	-0.01	0.420	0.489

<Bluetooth SAR>

WWAN off / WWAN on															
Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	Bluetooth	1Mbps	Front	10mm	Ant 4	39	2441	17.98	18.00	1.005	76.84	1.084	-0.06	0.133	0.145
47	Bluetooth	1Mbps	Back	10mm	Ant 4	39	2441	17.98	18.00	1.005	76.84	1.084	0.11	0.155	0.169



16.4 Product Specific SAR

<WLAN SAR>

WWAN off / WWAN on															
Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	WLAN5GHz	802.11n-HT40 MCS0	Front	0mm	Ant 4	54	5270	17.20	17.50	1.072	96.46	1.037	-0.16	0.750	0.833
	WLAN5GHz	802.11n-HT40 MCS0	Back	0mm	Ant 4	54	5270	17.20	17.50	1.072	96.46	1.037	-0.09	0.454	0.504
	WLAN5GHz	802.11n-HT40 MCS0	Right Side	0mm	Ant 4	54	5270	17.20	17.50	1.072	96.46	1.037	0.1	0.139	0.154
	WLAN5GHz	802.11n-HT40 MCS0	Top Side	0mm	Ant 4	54	5270	17.20	17.50	1.072	96.46	1.037	-0.12	0.415	0.461
	WLAN5GHz	802.11n-HT40 MCS0	Front	0mm	Ant 5	54	5270	17.30	17.50	1.047	96.45	1.037	0.13	0.267	0.290
	WLAN5GHz	802.11n-HT40 MCS0	Back	0mm	Ant 5	54	5270	17.30	17.50	1.047	96.45	1.037	-0.1	1.220	1.325
	WLAN5GHz	802.11n-HT40 MCS0	Right Side	0mm	Ant 5	54	5270	17.30	17.50	1.047	96.45	1.037	-0.06	0.694	0.754
	WLAN5GHz	802.11n-HT40 MCS0	Top Side	0mm	Ant 5	54	5270	17.30	17.50	1.047	96.45	1.037	-0.17	0.152	0.165
	WLAN5GHz	802.11n-HT40 MCS0	Front	0mm	Ant 4+5	54	5270	17.00	17.50	1.122	96.45	1.037	-0.19	0.774	0.901
48	WLAN5GHz	802.11n-HT40 MCS0	Back	0mm	Ant 4+5	54	5270	17.00	17.50	1.122	96.45	1.037	-0.12	1.300	1.513
	WLAN5GHz	802.11n-HT40 MCS0	Right Side	0mm	Ant 4+5	54	5270	17.00	17.50	1.122	96.45	1.037	0.03	0.674	0.784
	WLAN5GHz	802.11n-HT40 MCS0	Top Side	0mm	Ant 4+5	54	5270	17.00	17.50	1.122	96.45	1.037	-0.16	0.529	0.616
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	Ant 4	122	5610	17.40	17.50	1.023	92.00	1.087	-0.15	0.713	0.793
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 4	122	5610	17.40	17.50	1.023	92.00	1.087	-0.15	0.390	0.434
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Side	0mm	Ant 4	122	5610	17.40	17.50	1.023	92.00	1.087	-0.12	0.117	0.130
	WLAN5GHz	802.11ac-VHT80 MCS0	Top Side	0mm	Ant 4	122	5610	17.40	17.50	1.023	92.00	1.087	-0.09	0.361	0.402
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	Ant 5	122	5610	17.40	17.50	1.023	92.00	1.087	0.1	0.140	0.156
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 5	122	5610	17.40	17.50	1.023	92.00	1.087	0	0.749	0.833
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Side	0mm	Ant 5	122	5610	17.40	17.50	1.023	92.00	1.087	-0.11	0.437	0.486
	WLAN5GHz	802.11ac-VHT80 MCS0	Top Side	0mm	Ant 5	122	5610	17.40	17.50	1.023	92.00	1.087	-0.03	0.067	0.075
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	Ant 4+5	122	5610	17.10	17.50	1.096	92.00	1.087	-0.02	0.805	0.959
49	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 4+5	122	5610	17.10	17.50	1.096	92.00	1.087	-0.07	1.210	1.442
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Side	0mm	Ant 4+5	122	5610	17.10	17.50	1.096	92.00	1.087	-0.03	0.445	0.530
	WLAN5GHz	802.11ac-VHT80 MCS0	Top Side	0mm	Ant 4+5	122	5610	17.10	17.50	1.096	92.00	1.087	-0.01	0.414	0.493

16.5 Repeated SAR Measurement

No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Ratio	Reported 1g SAR (W/kg)
1st	GSM1900_Ant 0	GPRS 4 Tx slots	Bottom Side	10mm	512	1850.2	25.84	26.50	1.164	0	1.020	-	1.187
2nd	GSM1900_Ant 0	GPRS 4 Tx slots	Bottom Side	10mm	512	1850.2	25.84	26.50	1.164	0.02	0.985	1.03	1.147

General Note:

1. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg.
2. Per KDB 865664 D01v01r04, if the ratio among the repeated measurement is ≤ 1.2 and the measured SAR < 1.45 W/kg, only one repeated measurement is required.
3. The ratio is the difference in percentage between original and repeated *measured* SAR.
4. All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.



17. Simultaneous Transmission Analysis

RF Exposure Conditions	Item	Simultaneous Transmission Configurations	Remark
Head / Body-worn / Hotspot / Product Specific	1	(Ant 4)WIFI 5G SISO +(Ant 4) Bluetooth	
	2	(Ant 5)WIFI 5G SISO+(Ant 4) Bluetooth	
	3	WIFI 5G MIMO+(Ant 4) Bluetooth	
	4	(Ant 4)WIFI 5G SISO	
	5	(Ant 5)WIFI 5G SISO	
	6	WIFI 5G MIMO	
	7	(Ant 4) WIFI 2.4G SISO	
	8	(Ant 5) WIFI 2.4G SISO	
	9	(Ant 5) WIFI 2.4G SISO +(Ant 4) Bluetooth	
	10	WIFI 2.4G MIMO	
	11	(Ant 4) Bluetooth	
	12	(Ant 5) WIFI 5G SISO+(Ant 4) WIFI 2.4G SISO	
	13	(Ant 4) WIFI 5G SISO +(Ant 4) Bluetooth	
	14	(Ant 5) WIFI 5G SISO+(Ant 4) Bluetooth	
	15	WIFI 5G MIMO+(Ant 4) Bluetooth	
	16	(Ant 4) WIFI 5G SISO	
	17	(Ant 5) WIFI 5G SISO	
	18	WIFI 5G MIMO	
	19	(Ant 4) WIFI 2.4G SISO	
	20	(Ant 5) WIFI 2.4G SISO	
	21	(Ant 5) WIFI 2.4G SISO +(Ant 4) Bluetooth	
	22	WIFI 2.4G MIMO	
	23	(Ant 5) WIFI 5G SISO+ (Ant 4) WIFI 2.4G SISO	
	24	(Ant 4) Bluetooth	

General Note:

- This device WLAN 2.4GHz / 5.2GHz / 5.8GHz supports Hotspot operation and Bluetooth support tethering applications.
- The UMTS B5 test result are refer to original sporton SAR report no.: FA891148-01 and use perform sim-Tx analysis
- The worst case WLAN reported SAR for each configuration was used for SAR summation, regardless of whether the WLAN channel has WiFi Direct and Hotspot capability. Therefore, the following summations represent the absolute worst cases for simultaneous transmission with WLAN.
- When the device operates in different RF exposure conditions, cellular TX power has 2 power table associated with WLAN-ON and WLAN-OFF.
- The Scaled SAR summation is calculated based on the same configuration and test position.
- Per KDB 447498 D01v06, simultaneous transmission SAR is compliant if,
 - Scalar SAR summation < 1.6W/kg.
 - $SPLSR = (SAR1 + SAR2)^{1.5} / (\min. \text{ separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$, where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
 - If $SPLSR \leq 0.04$ for 1g SAR, if $SPLSR < 0.1$ for 10g SAR, simultaneously transmission SAR measurement is not necessary.
 - Simultaneously transmission SAR measurement, and the reported multi-band SAR < 1.6W/kg.
- When the device operates in head mode, cellular TX power has 2 power table associated with WLAN-ON (power table 1) and WLAN-OFF (power table 2). For Head exposure positions, Cellular SAR associated with power table 1 was used for analysis of simultaneous transmission with WLAN.



17.1 Head Exposure Conditions

<WWAN OFF>

Exposure Position	4	5	6	7	8	9	10	11	12	3+5+12 Summed 1g SAR (W/kg)	3+5+9 Summed 1g SAR (W/kg)	3+11+12 Summed 1g SAR (W/kg)
	2.4GHz WLAN Ant 4 1g SAR (W/kg)	2.4GHz WLAN Ant 5 1g SAR (W/kg)	2.4GHz WLAN Ant 4+5 1g SAR (W/kg)	2.4GHz WLAN MAX (SAR) 1g SAR (W/kg)	5GHz WLAN Ant 4 1g SAR (W/kg)	5GHz WLAN Ant 5 1g SAR (W/kg)	5GHz WLAN Ant 4+5 1g SAR (W/kg)	5GHz WLAN MAX (SAR) 1g SAR (W/kg)	Bluetooth Ant 4 1g SAR (W/kg)			
Right Cheek	0.298	0.116	0.302	0.302	0.261	0.088	0.362	0.362	0.318	0.434	0.204	0.680
Right Tilted	0.221	0.038	0.293	0.293	0.265	0.082	0.384	0.384	0.276	0.314	0.120	0.660
Left Cheek	0.571	0.343	0.613	0.613	0.338	0.160	0.405	0.405	0.774	1.117	0.503	1.179
Left Tilted	0.326	0.083	0.326	0.326	0.305	0.099	0.395	0.395	0.405	0.488	0.182	0.800

<WiFi ON>

WWAN Band	Exposure Position	1	2	3	4	5	6	7	8	9	10	11	12	3+6 Summed 1g SAR (W/kg)	3+5+12 Summed 1g SAR (W/kg)	3+5+9 Summed 1g SAR (W/kg)	3+11+12 Summed 1g SAR (W/kg)	
		WWAN Ant 0 / 2 1g SAR (W/kg)	WWAN Ant 1 / 3 1g SAR (W/kg)	WWAN MAX 1g SAR (W/kg)	2.4GHz WLAN Ant 4 1g SAR (W/kg)	2.4GHz WLAN Ant 5 1g SAR (W/kg)	2.4GHz WLAN Ant 4+5 1g SAR (W/kg)	2.4GHz WLAN MAX (SAR) 1g SAR (W/kg)	5GHz WLAN Ant 4 1g SAR (W/kg)	5GHz WLAN Ant 5 1g SAR (W/kg)	5GHz WLAN Ant 4+5 1g SAR (W/kg)	5GHz WLAN MAX (SAR) 1g SAR (W/kg)	Bluetooth Ant 4 1g SAR (W/kg)					
GSM	GSM850	Right Cheek	0.280		0.280	0.298	0.116	0.302	0.302	0.261	0.088	0.362	0.362	0.318	0.582	0.714	0.484	0.960
		Right Tilted	0.139		0.139	0.221	0.038	0.293	0.293	0.265	0.082	0.384	0.384	0.276	0.432	0.453	0.259	0.799
		Left Cheek	0.256		0.256	0.571	0.343	0.613	0.613	0.338	0.160	0.405	0.405	0.774	0.869	1.373	0.759	1.435
		Left Tilted	0.256		0.256	0.326	0.083	0.326	0.326	0.305	0.099	0.395	0.395	0.405	0.582	0.744	0.438	1.056
	GSM1900	Right Cheek	0.201		0.201	0.298	0.116	0.302	0.302	0.261	0.088	0.362	0.362	0.318	0.503	0.635	0.405	0.881
		Right Tilted	0.107		0.107	0.221	0.038	0.293	0.293	0.265	0.082	0.384	0.384	0.276	0.400	0.421	0.227	0.767
		Left Cheek	0.216		0.216	0.571	0.343	0.613	0.613	0.338	0.160	0.405	0.405	0.774	0.829	1.333	0.719	1.395
		Left Tilted	0.138		0.138	0.326	0.083	0.326	0.326	0.305	0.099	0.395	0.395	0.405	0.464	0.626	0.320	0.938
WCDMA	WCDMA II	Right Cheek	0.154		0.154	0.298	0.116	0.302	0.302	0.261	0.088	0.362	0.362	0.318	0.456	0.588	0.358	0.834
		Right Tilted	0.100		0.100	0.221	0.038	0.293	0.293	0.265	0.082	0.384	0.384	0.276	0.393	0.414	0.220	0.760
		Left Cheek	0.215		0.215	0.571	0.343	0.613	0.613	0.338	0.160	0.405	0.405	0.774	0.828	1.332	0.718	1.394
		Left Tilted	0.145		0.145	0.326	0.083	0.326	0.326	0.305	0.099	0.395	0.395	0.405	0.471	0.633	0.327	0.945
	WCDMA IV	Right Cheek	0.211		0.211	0.298	0.116	0.302	0.302	0.261	0.088	0.362	0.362	0.318	0.513	0.645	0.415	0.891
		Right Tilted	0.122		0.122	0.221	0.038	0.293	0.293	0.265	0.082	0.384	0.384	0.276	0.415	0.436	0.242	0.782
		Left Cheek	0.199		0.199	0.571	0.343	0.613	0.613	0.338	0.160	0.405	0.405	0.774	0.812	1.316	0.702	1.378
		Left Tilted	0.130		0.130	0.326	0.083	0.326	0.326	0.305	0.099	0.395	0.395	0.405	0.456	0.618	0.312	0.930
	WCDMA V	Right Cheek	0.152		0.152	0.298	0.116	0.302	0.302	0.261	0.088	0.362	0.362	0.318	0.454	0.586	0.356	0.832
		Right Tilted	0.065		0.065	0.221	0.038	0.293	0.293	0.265	0.082	0.384	0.384	0.276	0.358	0.379	0.185	0.725
		Left Cheek	0.136		0.136	0.571	0.343	0.613	0.613	0.338	0.160	0.405	0.405	0.774	0.749	1.253	0.639	1.315
		Left Tilted	0.081		0.081	0.326	0.083	0.326	0.326	0.305	0.099	0.395	0.395	0.405	0.407	0.569	0.263	0.881
LTE	LTE Band 2	Right Cheek	0.211		0.211	0.298	0.116	0.302	0.302	0.261	0.088	0.362	0.362	0.318	0.513	0.645	0.415	0.891
		Right Tilted	0.085		0.085	0.221	0.038	0.293	0.293	0.265	0.082	0.384	0.384	0.276	0.378	0.399	0.205	0.745
		Left Cheek	0.256		0.256	0.571	0.343	0.613	0.613	0.338	0.160	0.405	0.405	0.774	0.869	1.373	0.759	1.435
		Left Tilted	0.114		0.114	0.326	0.083	0.326	0.326	0.305	0.099	0.395	0.395	0.405	0.440	0.602	0.296	0.914
	LTE Band 4	Right Cheek	0.268		0.268	0.298	0.116	0.302	0.302	0.261	0.088	0.362	0.362	0.318	0.570	0.702	0.472	0.948
		Right Tilted	0.136		0.136	0.221	0.038	0.293	0.293	0.265	0.082	0.384	0.384	0.276	0.429	0.450	0.256	0.796
		Left Cheek	0.244		0.244	0.571	0.343	0.613	0.613	0.338	0.160	0.405	0.405	0.774	0.857	1.361	0.747	1.423
		Left Tilted	0.139		0.139	0.326	0.083	0.326	0.326	0.305	0.099	0.395	0.395	0.405	0.465	0.627	0.321	0.939
	LTE Band 12	Right Cheek	0.240		0.240	0.298	0.116	0.302	0.302	0.261	0.088	0.362	0.362	0.318	0.542	0.674	0.444	0.920
		Right Tilted	0.155		0.155	0.221	0.038	0.293	0.293	0.265	0.082	0.384	0.384	0.276	0.448	0.469	0.275	0.815
		Left Cheek	0.248		0.248	0.571	0.343	0.613	0.613	0.338	0.160	0.405	0.405	0.774	0.861	1.365	0.751	1.427
		Left Tilted	0.198		0.198	0.326	0.083	0.326	0.326	0.305	0.099	0.395	0.395	0.405	0.524	0.686	0.380	0.998
	LTE Band 13	Right Cheek	0.257		0.257	0.298	0.116	0.302	0.302	0.261	0.088	0.362	0.362	0.318	0.559	0.691	0.461	0.937
		Right Tilted	0.164		0.164	0.221	0.038	0.293	0.293	0.265	0.082	0.384	0.384	0.276	0.457	0.478	0.284	0.824
		Left Cheek	0.241		0.241	0.571	0.343	0.613	0.613	0.338	0.160	0.405	0.405	0.774	0.854	1.358	0.744	1.420



FCC SAR TEST REPORT

Report No. : FA891148-06

	Left Tilted	0.194		0.194	0.326	0.083	0.326	0.326	0.305	0.099	0.395	0.395	0.405	0.520	0.682	0.376	0.994
LTE Band 26	Right Cheek	0.293		0.293	0.298	0.116	0.302	0.302	0.261	0.088	0.362	0.362	0.318	0.595	0.727	0.497	0.973
	Right Tilted	0.162		0.162	0.221	0.038	0.293	0.293	0.265	0.082	0.384	0.384	0.276	0.455	0.476	0.282	0.822
	Left Cheek	0.247		0.247	0.571	0.343	0.613	0.613	0.338	0.160	0.405	0.405	0.774	0.860	1.364	0.750	1.426
	Left Tilted	0.169		0.169	0.326	0.083	0.326	0.326	0.305	0.099	0.395	0.395	0.405	0.495	0.657	0.351	0.969
LTE Band 38	Right Cheek	0.450		0.450	0.298	0.116	0.302	0.302	0.261	0.088	0.362	0.362	0.318	0.752	0.884	0.654	1.130
	Right Tilted	0.108		0.108	0.221	0.038	0.293	0.293	0.265	0.082	0.384	0.384	0.276	0.401	0.422	0.228	0.768
	Left Cheek	0.269		0.269	0.571	0.343	0.613	0.613	0.338	0.160	0.405	0.405	0.774	0.882	1.386	0.772	1.448
	Left Tilted	0.168		0.168	0.326	0.083	0.326	0.326	0.305	0.099	0.395	0.395	0.405	0.494	0.656	0.350	0.968
LTE Band 41	Right Cheek	0.393		0.393	0.298	0.116	0.302	0.302	0.261	0.088	0.362	0.362	0.318	0.695	0.827	0.597	1.073
	Right Tilted	0.119		0.119	0.221	0.038	0.293	0.293	0.265	0.082	0.384	0.384	0.276	0.412	0.433	0.239	0.779
	Left Cheek	0.217		0.217	0.571	0.343	0.613	0.613	0.338	0.160	0.405	0.405	0.774	0.830	1.334	0.720	1.396
	Left Tilted	0.166		0.166	0.326	0.083	0.326	0.326	0.305	0.099	0.395	0.395	0.405	0.492	0.654	0.348	0.966



<WiFi OFF>

WWAN Band		Exposure Position	1	2	3	12	3+12 Summed 1g SAR (W/kg)
			WWAN Ant 0 / 2 1g SAR (W/kg)	WWAN Ant 1 / 3 1g SAR (W/kg)	WWAN MAX 1g SAR (W/kg)	Bluetooth Ant 4 1g SAR (W/kg)	
GSM	GSM850	Right Cheek	0.280		0.280	0.318	0.598
		Right Tilted	0.139		0.139	0.276	0.415
		Left Cheek	0.256		0.256	0.774	1.030
		Left Tilted	0.256		0.256	0.405	0.661
	GSM1900	Right Cheek	0.201		0.201	0.318	0.519
		Right Tilted	0.107		0.107	0.276	0.383
		Left Cheek	0.216		0.216	0.774	0.990
		Left Tilted	0.138		0.138	0.405	0.543
WCDMA	WCDMA II	Right Cheek	0.336		0.336	0.318	0.654
		Right Tilted	0.189		0.189	0.276	0.465
		Left Cheek	0.474		0.474	0.774	1.248
		Left Tilted	0.349		0.349	0.405	0.754
	WCDMA IV	Right Cheek	0.211		0.211	0.318	0.529
		Right Tilted	0.122		0.122	0.276	0.398
		Left Cheek	0.199		0.199	0.774	0.973
		Left Tilted	0.130		0.130	0.405	0.535
	WCDMA V	Right Cheek	0.152		0.152	0.318	0.470
		Right Tilted	0.065		0.065	0.276	0.341
		Left Cheek	0.136		0.136	0.774	0.910
		Left Tilted	0.081		0.081	0.405	0.486
LTE	LTE Band 2	Right Cheek	0.376		0.376	0.318	0.694
		Right Tilted	0.155		0.155	0.276	0.431
		Left Cheek	0.441		0.441	0.774	1.215
		Left Tilted	0.242		0.242	0.405	0.647
	LTE Band 4	Right Cheek	0.268		0.268	0.318	0.586
		Right Tilted	0.136		0.136	0.276	0.412
		Left Cheek	0.244		0.244	0.774	1.018
		Left Tilted	0.139		0.139	0.405	0.544
	LTE Band 12	Right Cheek	0.240		0.240	0.318	0.558
		Right Tilted	0.155		0.155	0.276	0.431
		Left Cheek	0.248		0.248	0.774	1.022
		Left Tilted	0.198		0.198	0.405	0.603
	LTE Band 13	Right Cheek	0.257		0.257	0.318	0.575
		Right Tilted	0.164		0.164	0.276	0.440
		Left Cheek	0.241		0.241	0.774	1.015
		Left Tilted	0.194		0.194	0.405	0.599
	LTE Band 26	Right Cheek	0.293		0.293	0.318	0.611
		Right Tilted	0.162		0.162	0.276	0.438
		Left Cheek	0.247		0.247	0.774	1.021
		Left Tilted	0.169		0.169	0.405	0.574
	LTE Band 38	Right Cheek	0.816		0.816	0.318	1.134
		Right Tilted	0.180		0.180	0.276	0.456
		Left Cheek	0.466		0.466	0.774	1.240
		Left Tilted	0.282		0.282	0.405	0.687
	LTE Band 41	Right Cheek	0.755		0.755	0.318	1.073
		Right Tilted	0.197		0.197	0.276	0.473
		Left Cheek	0.352		0.352	0.774	1.126
		Left Tilted	0.287		0.287	0.405	0.692



17.2 Hotspot Exposure Conditions

<WiFi ON>

WWAN Band	Exposure Position	1	2	3	4	5	6	7	8	9	10	11	12	3+6 Summed 1g SAR (W/kg)	3+5+12 Summed 1g SAR (W/kg)	3+5+9 Summed 1g SAR (W/kg)	3+11+12 Summed 1g SAR (W/kg)	
		WWAN Ant 0 / 2 1g SAR (W/kg)	WWAN Ant 1 / 3 1g SAR (W/kg)	WWAN MAX 1g SAR (W/kg)	2.4GHz WLAN Ant 4 1g SAR (W/kg)	2.4GHz WLAN Ant 5 1g SAR (W/kg)	2.4GHz WLAN Ant 4+5 1g SAR (W/kg)	2.4GHz WLAN MAX (SAR) 1g SAR (W/kg)	5GHz WLAN Ant 4 1g SAR (W/kg)	5GHz WLAN Ant 5 1g SAR (W/kg)	5GHz WLAN Ant 4+5 1g SAR (W/kg)	5GHz WLAN MAX (SAR) 1g SAR (W/kg)	Bluetooth Ant 4 1g SAR (W/kg)					
GSM	GSM850	Front	0.153		0.153	0.136	0.119	0.263	0.263	0.261	0.124	0.350	0.350	0.145	0.416	0.417	0.396	0.648
		Back	0.206		0.206	0.236	0.251	0.374	0.374	0.333	0.670	0.644	0.670	0.169	0.580	0.626	1.127	1.045
		Left side	0.089		0.089										0.089	0.089	0.089	0.089
		Right side	0.162		0.162	0.113	0.156	0.328	0.328	0.097	0.576	0.576	0.576	0.068	0.490	0.386	0.894	0.806
		Bottom side	0.053		0.053										0.053	0.053	0.053	0.053
	GSM1900	Front	0.243		0.243	0.136	0.119	0.263	0.263	0.261	0.124	0.350	0.350	0.145	0.506	0.507	0.486	0.738
		Back	0.133		0.133	0.236	0.251	0.374	0.374	0.333	0.670	0.644	0.670	0.169	0.507	0.553	1.054	0.972
		Left side	0.038		0.038										0.038	0.038	0.038	0.038
		Right side	0.030		0.030	0.113	0.156	0.328	0.328	0.097	0.576	0.576	0.576	0.068	0.358	0.254	0.762	0.674
		Bottom side	0.282		0.282										0.282	0.282	0.282	0.282
WCDMA	WCDMA II	Front	0.232		0.232	0.136	0.119	0.263	0.263	0.261	0.124	0.350	0.350	0.145	0.495	0.496	0.475	0.727
		Back	0.201		0.201	0.236	0.251	0.374	0.374	0.333	0.670	0.644	0.670	0.169	0.575	0.621	1.122	1.040
		Left side	0.154		0.154										0.154	0.154	0.154	0.154
		Right side	0.066		0.066	0.113	0.156	0.328	0.328	0.097	0.576	0.576	0.576	0.068	0.394	0.290	0.798	0.710
		Bottom side	0.312		0.312										0.312	0.312	0.312	0.312
	WCDMA IV	Front	0.229		0.229	0.136	0.119	0.263	0.263	0.261	0.124	0.350	0.350	0.145	0.492	0.493	0.472	0.724
		Back	0.218		0.218	0.236	0.251	0.374	0.374	0.333	0.670	0.644	0.670	0.169	0.592	0.638	1.139	1.057
		Left side	0.081		0.081										0.081	0.081	0.081	0.081
		Right side	0.046		0.046	0.113	0.156	0.328	0.328	0.097	0.576	0.576	0.576	0.068	0.374	0.270	0.778	0.690
		Bottom side	0.333		0.333										0.333	0.333	0.333	0.333
	WCDMA V	Front	0.143		0.143	0.136	0.119	0.263	0.263	0.261	0.124	0.350	0.350	0.145	0.406	0.407	0.386	0.638
		Back	0.173		0.173	0.236	0.251	0.374	0.374	0.333	0.670	0.644	0.670	0.169	0.547	0.593	1.094	1.012
		Left side	0.057		0.057										0.057	0.057	0.057	0.057
		Right side	0.143		0.143	0.113	0.156	0.328	0.328	0.097	0.576	0.576	0.576	0.068	0.471	0.367	0.875	0.787
		Bottom side	0.022		0.022										0.022	0.022	0.022	0.022
LTE	LTE Band 2	Front	0.252		0.252	0.136	0.119	0.263	0.263	0.261	0.124	0.350	0.350	0.145	0.515	0.516	0.495	0.747
		Back	0.193		0.193	0.236	0.251	0.374	0.374	0.333	0.670	0.644	0.670	0.169	0.567	0.613	1.114	1.032
		Left side	0.134		0.134										0.134	0.134	0.134	0.134
		Right side	0.046		0.046	0.113	0.156	0.328	0.328	0.097	0.576	0.576	0.576	0.068	0.374	0.270	0.778	0.690
		Bottom side	0.287		0.287										0.287	0.287	0.287	0.287
	LTE Band 4	Front	0.173		0.173	0.136	0.119	0.263	0.263	0.261	0.124	0.350	0.350	0.145	0.436	0.437	0.416	0.668
		Back	0.155		0.155	0.236	0.251	0.374	0.374	0.333	0.670	0.644	0.670	0.169	0.529	0.575	1.076	0.994
		Left side	0.067		0.067										0.067	0.067	0.067	0.067
		Right side	0.025		0.025	0.113	0.156	0.328	0.328	0.097	0.576	0.576	0.576	0.068	0.353	0.249	0.757	0.669
		Bottom side	0.261		0.261										0.261	0.261	0.261	0.261
	LTE Band 12	Front	0.158		0.158	0.136	0.119	0.263	0.263	0.261	0.124	0.350	0.350	0.145	0.421	0.422	0.401	0.653
		Back	0.230		0.230	0.236	0.251	0.374	0.374	0.333	0.670	0.644	0.670	0.169	0.604	0.650	1.151	1.069
		Left side	0.144		0.144										0.144	0.144	0.144	0.144
		Right side	0.138		0.138	0.113	0.156	0.328	0.328	0.097	0.576	0.576	0.576	0.068	0.466	0.362	0.870	0.782
		Bottom side	0.040		0.040										0.040	0.040	0.040	0.040
	LTE Band 13	Front	0.177		0.177	0.136	0.119	0.263	0.263	0.261	0.124	0.350	0.350	0.145	0.440	0.441	0.420	0.672
		Back	0.186		0.186	0.236	0.251	0.374	0.374	0.333	0.670	0.644	0.670	0.169	0.560	0.606	1.107	1.025
		Left side	0.188		0.188										0.188	0.188	0.188	0.188
		Right side	0.239		0.239	0.113	0.156	0.328	0.328	0.097	0.576	0.576	0.576	0.068	0.567	0.463	0.971	0.883
		Bottom side	0.049		0.049										0.049	0.049	0.049	0.049
LTE Band 26	Front	0.192		0.192	0.136	0.119	0.263	0.263	0.261	0.124	0.350	0.350	0.145	0.455	0.456	0.435	0.687	
	Back	0.243		0.243	0.236	0.251	0.374	0.374	0.333	0.670	0.644	0.670	0.169	0.617	0.663	1.164	1.082	
	Left side	0.141		0.141										0.141	0.141	0.141	0.141	



FCC SAR TEST REPORT

Report No. : FA891148-06

		Right side	0.207		0.207	0.113	0.156	0.328	0.328	0.097	0.576	0.576	0.576	0.068	0.535	0.431	0.939	0.851	
		Bottom side	0.065		0.065											0.065	0.065	0.065	0.065
	LTE Band 38	Front		0.229		0.229	0.136	0.119	0.263	0.263	0.261	0.124	0.350	0.350	0.145	0.492	0.493	0.472	0.724
			Back	0.340		0.340	0.236	0.251	0.374	0.374	0.333	0.670	0.644	0.670	0.169	0.714	0.760	1.261	1.179
		Left side	0.022		0.022											0.022	0.022	0.022	0.022
		Right side	0.307		0.307	0.113	0.156	0.328	0.328	0.097	0.576	0.576	0.576	0.068		0.635	0.531	1.039	0.951
		Bottom side	0.064		0.064											0.064	0.064	0.064	0.064
	LTE Band 41	Front		0.198		0.198	0.136	0.119	0.263	0.263	0.261	0.124	0.350	0.350	0.145	0.461	0.462	0.441	0.693
			Back	0.346		0.346	0.236	0.251	0.374	0.374	0.333	0.670	0.644	0.670	0.169	0.720	0.766	1.267	1.185
		Left side	0.015		0.015											0.015	0.015	0.015	0.015
		Right side	0.315		0.315	0.113	0.156	0.328	0.328	0.097	0.576	0.576	0.576	0.068		0.643	0.539	1.047	0.959
		Bottom side	0.050		0.050											0.050	0.050	0.050	0.050



<WiFi OFF>

WWAN Band		Exposure Position	1	2	3	12	3+12 Summed 1g SAR (W/kg)
			WWAN Ant 0 / 2 1g SAR (W/kg)	WWAN Ant 1 / 3 1g SAR (W/kg)	WWAN MAX 1g SAR (W/kg)	Bluetooth Ant 4 1g SAR (W/kg)	
GSM	GSM850	Front	0.242	0.255	0.255	0.145	0.400
		Back	0.331	0.341	0.341	0.169	0.510
		Left side	0.146	0.320	0.320		0.320
		Right side	0.251	0.238	0.251	0.068	0.319
		Top side		0.233	0.233	0.078	0.311
	Bottom side	0.087		0.087		0.087	
	GSM1900	Front	0.712		0.712	0.145	0.857
		Back	0.510		0.510	0.169	0.679
		Left side	0.142		0.142		0.142
		Right side	0.097		0.097	0.068	0.165
Bottom side		1.187		1.187		1.187	
WCDMA	WCDMA II	Front	0.879		0.879	0.145	1.024
		Back	0.574		0.574	0.169	0.743
		Left side	0.498		0.498		0.498
		Right side	0.217		0.217	0.068	0.285
		Bottom side	0.980		0.980		0.980
	WCDMA IV	Front	0.568	0.397	0.568	0.145	0.713
		Back	0.559	0.456	0.559	0.169	0.728
		Left side	0.200	0.246	0.246		0.246
		Right side	0.109	0.016	0.109	0.068	0.177
		Top side		0.302	0.302	0.078	0.380
	Bottom side	0.764		0.764		0.764	
	WCDMA V	Front	0.143		0.143	0.145	0.288
		Back	0.173		0.173	0.169	0.342
		Left side	0.057		0.057		0.057
		Right side	0.143		0.143	0.068	0.211
Top side					0.078	0.078	
Bottom side	0.022		0.022		0.022		
LTE	LTE Band 2	Front	0.974		0.974	0.145	1.119
		Back	0.745		0.745	0.169	0.914
		Left side	0.533		0.533		0.533
		Right side	0.183		0.183	0.068	0.251
		Bottom side	1.062		1.062		1.062
	LTE Band 4	Front	0.694	0.391	0.694	0.145	0.839
		Back	0.677	0.493	0.677	0.169	0.846
		Left side	0.201	0.297	0.297		0.297
		Right side	0.114	0.025	0.114	0.068	0.182
		Top side		0.399	0.399	0.078	0.477
	Bottom side	0.927		0.927		0.927	
	LTE Band 12	Front	0.340	0.210	0.340	0.145	0.485
		Back	0.507	0.279	0.507	0.169	0.676
		Left side	0.326	0.308	0.326		0.326
		Right side	0.295	0.128	0.295	0.068	0.363
		Top side		0.096	0.096	0.078	0.174
	Bottom side	0.066		0.066		0.066	
	LTE Band 13	Front	0.316	0.304	0.316	0.145	0.461
Back		0.450	0.341	0.450	0.169	0.619	
Left side		0.330	0.462	0.462		0.462	
Right side		0.376	0.304	0.376	0.068	0.444	
Top side			0.169	0.169	0.078	0.247	
Bottom side	0.070		0.070		0.070		



	LTE Band 26	Front	0.274	0.332	0.332	0.145	0.477
		Back	0.322	0.477	0.477	0.169	0.646
		Left side	0.223	0.363	0.363		0.363
		Right side	0.248	0.266	0.266	0.068	0.334
		Top side		0.262	0.262	0.078	0.340
		Bottom side	0.077		0.077		0.077
	LTE Band 38	Front	0.716		0.716	0.145	0.861
		Back	0.971		0.971	0.169	1.140
		Left side	0.035		0.035		0.035
		Right side	0.718		0.718	0.068	0.786
		Bottom side	0.153		0.153		0.153
	LTE Band 41	Front	0.627		0.627	0.145	0.772
		Back	0.974		0.974	0.169	1.143
		Left side	0.025		0.025		0.025
		Right side	0.880		0.880	0.068	0.948
		Bottom side	0.146		0.146		0.146



17.3 Body-Worn Accessory Exposure Conditions

<WWAN OFF>

Exposure Position	4	5	6	7	8	9	10	11	12	3+5+12 Summed 1g SAR (W/kg)	3+5+9 Summed 1g SAR (W/kg)	3+11+12 Summed 1g SAR (W/kg)
	2.4GHz WLAN Ant 4 1g SAR (W/kg)	2.4GHz WLAN Ant 5 1g SAR (W/kg)	2.4GHz WLAN Ant 4+5 1g SAR (W/kg)	2.4GHz WLAN MAX (SAR) 1g SAR (W/kg)	5GHz WLAN Ant 4 1g SAR (W/kg)	5GHz WLAN Ant 5 1g SAR (W/kg)	5GHz WLAN Ant 4+5 1g SAR (W/kg)	5GHz WLAN MAX (SAR) 1g SAR (W/kg)	Bluetooth Ant 4 1g SAR (W/kg)			
Front	0.136	0.119	0.263	0.263	0.276	0.136	0.402	0.402	0.145	0.264	0.255	0.547
Back	0.236	0.251	0.347	0.347	0.293	0.685	0.635	0.685	0.169	0.420	0.936	0.854

<WiFi ON>

WWAN Band	Exposure Position	1	2	3	4	5	6	7	8	9	10	11	12	3+6 Summed 1g SAR (W/kg)	3+5+12 Summed 1g SAR (W/kg)	3+5+9 Summed 1g SAR (W/kg)	3+11+12 Summed 1g SAR (W/kg)	
		WWAN Ant 0 / 2 1g SAR (W/kg)	WWAN Ant 1 / 3 1g SAR (W/kg)	WWAN MAX 1g SAR (W/kg)	2.4GHz WLAN Ant 4 1g SAR (W/kg)	2.4GHz WLAN Ant 5 1g SAR (W/kg)	2.4GHz WLAN Ant 4+5 1g SAR (W/kg)	2.4GHz WLAN MAX (SAR) 1g SAR (W/kg)	5GHz WLAN Ant 4 1g SAR (W/kg)	5GHz WLAN Ant 5 1g SAR (W/kg)	5GHz WLAN Ant 4+5 1g SAR (W/kg)	5GHz WLAN MAX (SAR) 1g SAR (W/kg)	Bluetooth Ant 4 1g SAR (W/kg)					
GSM	GSM850	Front	0.153		0.153	0.136	0.119	0.263	0.263	0.276	0.136	0.402	0.402	0.145	0.416	0.417	0.408	0.700
		Back	0.206		0.206	0.236	0.251	0.347	0.347	0.293	0.685	0.635	0.685	0.169	0.553	0.626	1.142	1.060
	GSM1900	Front	0.243		0.243	0.136	0.119	0.263	0.263	0.276	0.136	0.402	0.402	0.145	0.506	0.507	0.498	0.790
		Back	0.133		0.133	0.236	0.251	0.347	0.347	0.293	0.685	0.635	0.685	0.169	0.480	0.553	1.069	0.987
WCDMA	WCDMA II	Front	0.232		0.232	0.136	0.119	0.263	0.263	0.276	0.136	0.402	0.402	0.145	0.495	0.496	0.487	0.779
		Back	0.201		0.201	0.236	0.251	0.347	0.347	0.293	0.685	0.635	0.685	0.169	0.548	0.621	1.137	1.055
	WCDMA IV	Front	0.229		0.229	0.136	0.119	0.263	0.263	0.276	0.136	0.402	0.402	0.145	0.492	0.493	0.484	0.776
		Back	0.218		0.218	0.236	0.251	0.347	0.347	0.293	0.685	0.635	0.685	0.169	0.565	0.638	1.154	1.072
	WCDMA V	Front	0.143		0.143	0.136	0.119	0.263	0.263	0.276	0.136	0.402	0.402	0.145	0.406	0.407	0.398	0.690
		Back	0.173		0.173	0.236	0.251	0.347	0.347	0.293	0.685	0.635	0.685	0.169	0.520	0.593	1.109	1.027
LTE	LTE Band 2	Front	0.252		0.252	0.136	0.119	0.263	0.263	0.276	0.136	0.402	0.402	0.145	0.515	0.516	0.507	0.799
		Back	0.193		0.193	0.236	0.251	0.347	0.347	0.293	0.685	0.635	0.685	0.169	0.540	0.613	1.129	1.047
	LTE Band 4	Front	0.173		0.173	0.136	0.119	0.263	0.263	0.276	0.136	0.402	0.402	0.145	0.436	0.437	0.428	0.720
		Back	0.155		0.155	0.236	0.251	0.347	0.347	0.293	0.685	0.635	0.685	0.169	0.502	0.575	1.091	1.009
	LTE Band 12	Front	0.158		0.158	0.136	0.119	0.263	0.263	0.276	0.136	0.402	0.402	0.145	0.421	0.422	0.413	0.705
		Back	0.230		0.230	0.236	0.251	0.347	0.347	0.293	0.685	0.635	0.685	0.169	0.577	0.650	1.166	1.084
	LTE Band 13	Front	0.177		0.177	0.136	0.119	0.263	0.263	0.276	0.136	0.402	0.402	0.145	0.440	0.441	0.432	0.724
		Back	0.186		0.186	0.236	0.251	0.347	0.347	0.293	0.685	0.635	0.685	0.169	0.533	0.606	1.122	1.040
	LTE Band 26	Front	0.192		0.192	0.136	0.119	0.263	0.263	0.276	0.136	0.402	0.402	0.145	0.455	0.456	0.447	0.739
		Back	0.243		0.243	0.236	0.251	0.347	0.347	0.293	0.685	0.635	0.685	0.169	0.590	0.663	1.179	1.097
	LTE Band 38	Front	0.229		0.229	0.136	0.119	0.263	0.263	0.276	0.136	0.402	0.402	0.145	0.492	0.493	0.484	0.776
		Back	0.340		0.340	0.236	0.251	0.347	0.347	0.293	0.685	0.635	0.685	0.169	0.687	0.760	1.276	1.194
	LTE Band 41	Front	0.198		0.198	0.136	0.119	0.263	0.263	0.276	0.136	0.402	0.402	0.145	0.461	0.462	0.453	0.745
		Back	0.346		0.346	0.236	0.251	0.347	0.347	0.293	0.685	0.635	0.685	0.169	0.693	0.766	1.282	1.200



<WiFi OFF>

WWAN Band		Exposure Position	1	2	3	12	3+12 Summed 1g SAR (W/kg)
			WWAN Ant 0 / 2 1g SAR (W/kg)	WWAN Ant 1 / 3 1g SAR (W/kg)	WWAN MAX 1g SAR (W/kg)	Bluetooth Ant 4 1g SAR (W/kg)	
GSM	GSM850	Front	0.242	0.255	0.255	0.145	0.400
		Back	0.331	0.341	0.341	0.169	0.510
	GSM1900	Front	0.712		0.712	0.145	0.857
		Back	0.510		0.510	0.169	0.679
WCDMA	WCDMA II	Front	0.879		0.879	0.145	1.024
		Back	0.574		0.574	0.169	0.743
	WCDMA IV	Front	0.568	0.397	0.568	0.145	0.713
		Back	0.559	0.456	0.559	0.169	0.728
	WCDMA V	Front	0.143	0.182	0.182	0.145	0.327
		Back	0.173	0.195	0.195	0.169	0.364
LTE	LTE Band 2	Front	0.974		0.974	0.145	1.119
		Back	0.745		0.745	0.169	0.914
	LTE Band 4	Front	0.694	0.391	0.694	0.145	0.839
		Back	0.677	0.493	0.677	0.169	0.846
	LTE Band 12	Front	0.340	0.210	0.340	0.145	0.485
		Back	0.507	0.279	0.507	0.169	0.676
	LTE Band 13	Front	0.316	0.304	0.316	0.145	0.461
		Back	0.450	0.341	0.450	0.169	0.619
	LTE Band 26	Front	0.274	0.332	0.332	0.145	0.477
		Back	0.322	0.477	0.477	0.169	0.646
	LTE Band 38	Front	0.716		0.716	0.145	0.861
		Back	0.971		0.971	0.169	1.140
	LTE Band 41	Front	0.627		0.627	0.145	0.772
		Back	0.974		0.974	0.169	1.143

17.4 Product Specific Exposure Conditions

Exposure Position	1	2	3	4	5	6	7	1+2+3 Summed 10g SAR (W/kg)	1+2+5 Summed 10g SAR (W/kg)	1+4+7 Summed 10g SAR (W/kg)	1+5+7 Summed 10g SAR (W/kg)	1+6+7 Summed 10g SAR (W/kg)
	WWAN	2.4GHz WLAN Ant 4	2.4GHz WLAN Ant 5	5GHz WLAN Ant 4	5GHz WLAN Ant 5	5GHz WLAN Ant 4+5	Bluetooth Ant 4					
Front				0.833	0.290	0.959		0.000	0.290	0.833	0.290	0.959
Back				0.504	1.325	1.513		0.000	1.325	0.504	1.325	1.513
Left side								0.000	0.000	0.000	0.000	0.000
Right side				0.154	0.754	0.784		0.000	0.754	0.154	0.754	0.784
Top side				0.461	0.165	0.616		0.000	0.165	0.461	0.165	0.616
Bottom side								0.000	0.000	0.000	0.000	0.000

Remark:

1. According to KDB 941225 D06 v02r01 and KDB 648474 D04v01r03, for WWAN / 2.4GHz WLAN / Bluetooth SAR was excluded, due to transmitting antenna located larger 25mm from that surface or edge and Hotspot SAR was < 1.2W/Kg.

Test Engineer : Iran Wang Kurt Liu Wilson Lin White Huang Jay Jian Willy Yu Andy Jiang Randy Lin
Neil Hsiang Carter Chuang and Mood Huang



18. Uncertainty Assessment

Per KDB 865664 D01 SAR measurement 100MHz to 6GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be $\leq 30\%$, for a confidence interval of $k = 2$. If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. For this device, the highest measured 1-g SAR is less 1.5W/kg. Therefore, the measurement uncertainty table is not required in this report.

19. References

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", Sep 2013
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 248227 D01 v02r02, "SAR Guidance for IEEE 802.11 (WiFi) Transmitters", Oct 2015.
- [6] FCC KDB 447498 D01 v06, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", Oct 2015
- [7] FCC KDB 648474 D04 v01r03, "SAR Evaluation Considerations for Wireless Handsets", Oct 2015.
- [8] FCC KDB 941225 D01 v03r01, "3G SAR MEAUREMENT PROCEDURES", Oct 2015
- [9] FCC KDB 941225 D05 v02r05, "SAR Evaluation Considerations for LTE Devices", Dec 2015
- [10] FCC KDB 941225 D05A v01r02, "Rel. 10 LTE SAR Test Guidance and KDB Inquiries", Oct 2015
- [11] FCC KDB 941225 D06 v02r01, "SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities", Oct 2015.
- [12] FCC KDB 865664 D01 v01r04, "SAR Measurement Requirements for 100 MHz to 6 GHz", Aug 2015.
- [13] FCC KDB 865664 D02 v01r02, "RF Exposure Compliance Reporting and Documentation Considerations" Oct 2015.