

**#48\_GSM850\_GPRS (4 Tx slots)\_Back\_10mm\_Ch189**

Communication System: GSM850; Frequency: 836.4 MHz; Duty Cycle: 1:2.08

Medium: HSL\_850\_190422 Medium parameters used:  $f = 836.4$  MHz;  $\sigma = 0.916$  S/m;  $\epsilon_r = 42.728$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(10.19, 10.19, 10.19) @ 836.4 MHz; Calibrated: 2019/1/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1424; Calibrated: 2019/1/24
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1682
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

**Area Scan (71x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.957 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 28.39 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 1.53 W/kg

**SAR(1 g) = 0.730 W/kg; SAR(10 g) = 0.391 W/kg**

Maximum value of SAR (measured) = 1.05 W/kg

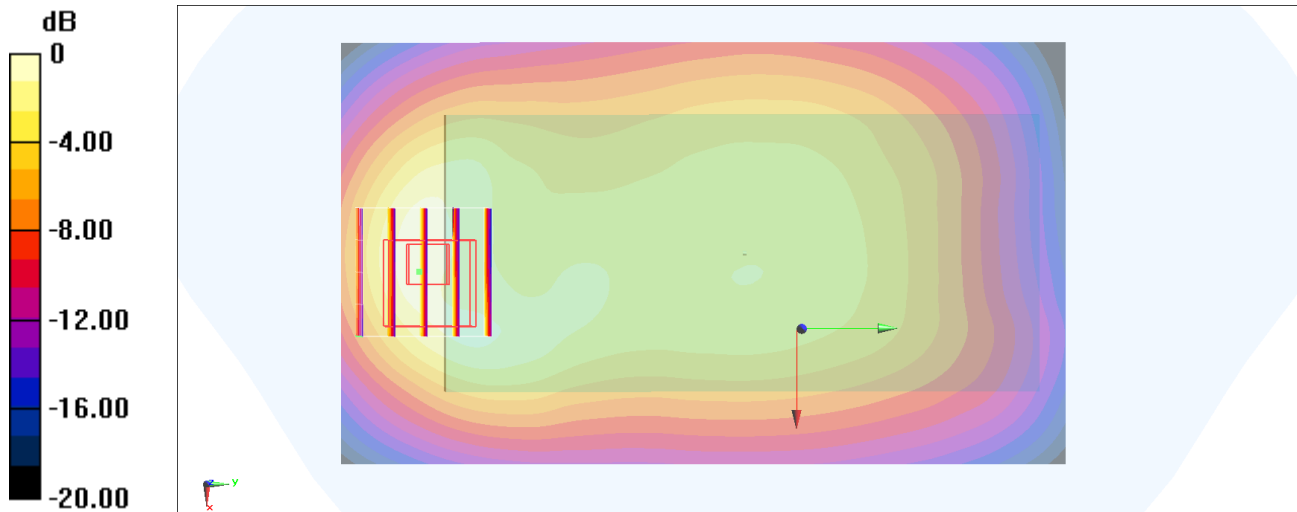

0 dB = 1.05 W/kg = 0.21 dBW/kg

### #49\_GSM1900\_GPRS (4 Tx slots)\_Back\_10mm\_Ch661


Communication System: PCS; Frequency: 1880 MHz; Duty Cycle: 1:2.08  
Medium: HSL\_1900\_190614 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.433$  S/m;  $\epsilon_r = 40.185$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.6 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3925; ConvF(8.46, 8.46, 8.46) @ 1880 MHz; Calibrated: 2019/5/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2019/5/21
- Phantom: SAM-Middle; Type: SAM; Serial: 1796
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (71x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 1.02 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 15.27 V/m; Power Drift = -0.13 dB  
Peak SAR (extrapolated) = 1.33 W/kg  
**SAR(1 g) = 0.688 W/kg; SAR(10 g) = 0.368 W/kg**  
Maximum value of SAR (measured) = 1.09 W/kg

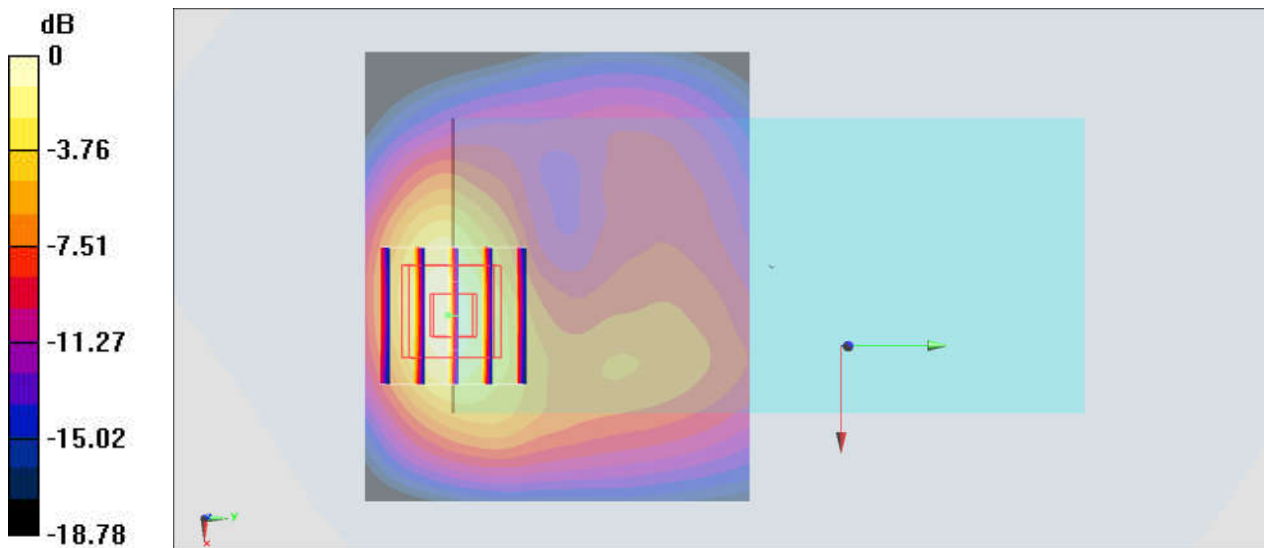

0 dB = 1.09 W/kg = 0.37 dBW/kg

### #50\_WCDMA II\_RMC 12.2Kbps\_Back\_10mm\_Ch9262


Communication System: WCDMA; Frequency: 1852.4 MHz; Duty Cycle: 1:1  
Medium: HSL\_1900\_190602 Medium parameters used :  $f = 1852.4$  MHz;  $\sigma = 1.363$  S/m;  $\epsilon_r = 40.861$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.3 °C; Liquid Temperature : 22.3 °C

#### DASY5 Configuration:

- Probe: ES3DV3 - SN3124; ConvF(4.95, 4.95, 4.95) @ 1852.4 MHz; Calibrated: 2019/1/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn316; Calibrated: 2019/1/3
- Phantom: SAM-Middle; Type: SAM; Serial: 1796
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

**Area Scan (61x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 1.27 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 17.71 V/m; Power Drift = 0.02 dB  
Peak SAR (extrapolated) = 1.74 W/kg  
**SAR(1 g) = 0.98 W/kg; SAR(10 g) = 0.549 W/kg**  
Maximum value of SAR (measured) = 1.25 W/kg

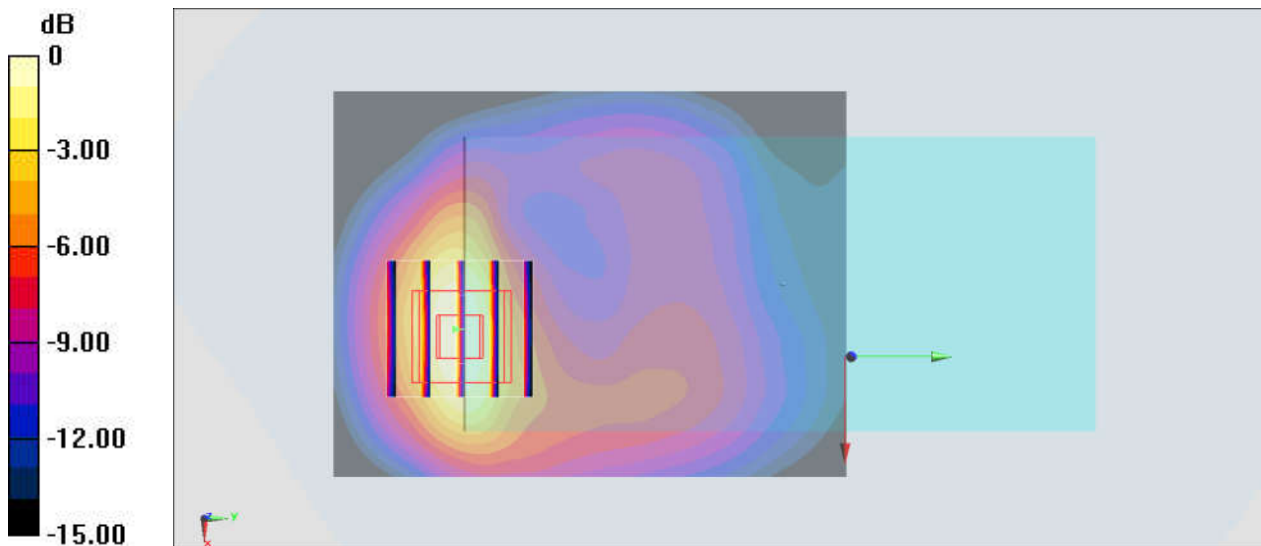

0 dB = 1.25 W/kg = 0.97 dBW/kg

### #51\_WCDMA IV\_RMC 12.2Kbps\_Back\_10mm\_Ch1513


Communication System: WCDMA; Frequency: 1752.6 MHz; Duty Cycle: 1:1  
Medium: HSL\_1750\_190614 Medium parameters used:  $f = 1753 \text{ MHz}$ ;  $\sigma = 1.369 \text{ S/m}$ ;  $\epsilon_r = 39.404$ ;  
 $\rho = 1000 \text{ kg/m}^3$   
Ambient Temperature :  $23.6 \text{ }^\circ\text{C}$ ; Liquid Temperature :  $22.6 \text{ }^\circ\text{C}$

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3925; ConvF(8.84, 8.84, 8.84) @ 1752.6 MHz; Calibrated: 2019/5/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2019/5/21
- Phantom: SAM-Middle; Type: SAM; Serial: 1796
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (71x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
Maximum value of SAR (interpolated) =  $1.40 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
Reference Value =  $16.33 \text{ V/m}$ ; Power Drift =  $0.12 \text{ dB}$   
Peak SAR (extrapolated) =  $1.82 \text{ W/kg}$   
**SAR(1 g) =  $0.989 \text{ W/kg}$ ; SAR(10 g) =  $0.529 \text{ W/kg}$**   
Maximum value of SAR (measured) =  $1.50 \text{ W/kg}$

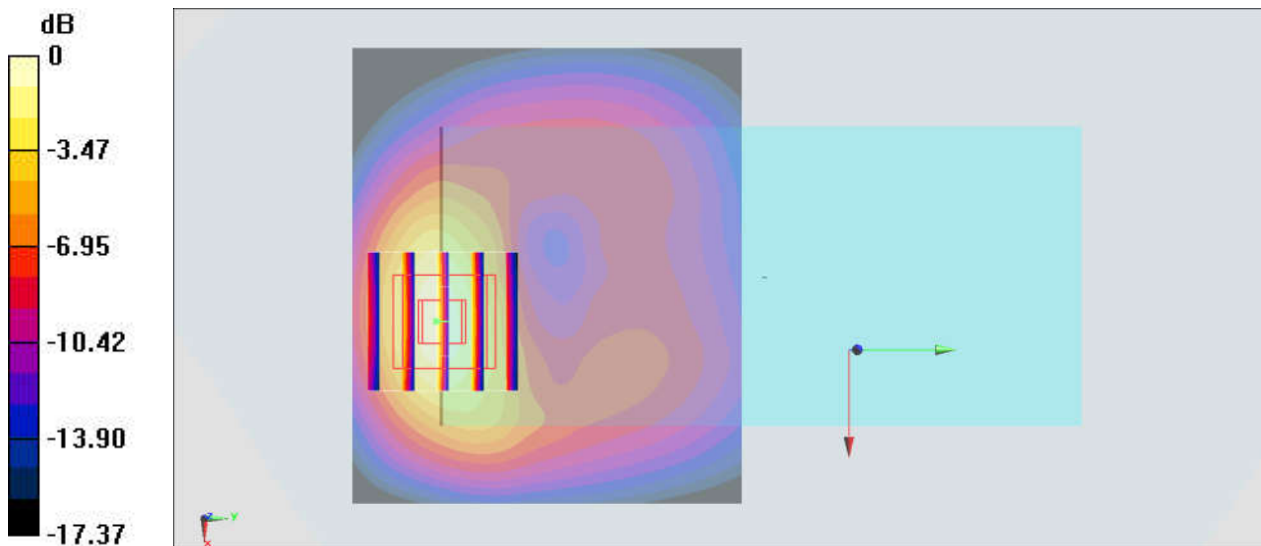

0 dB =  $1.50 \text{ W/kg}$  =  $1.76 \text{ dBW/kg}$

**#52\_WCDMA V\_RMC 12.2Kbps\_Back\_10mm\_Ch4182**

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL\_850\_190422 Medium parameters used:  $f = 836.4$  MHz;  $\sigma = 0.916$  S/m;  $\epsilon_r = 42.728$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(10.19, 10.19, 10.19) @ 836.4 MHz; Calibrated: 2019/1/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1424; Calibrated: 2019/1/24
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1682
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

**Area Scan (71x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.907 W/kg


**Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 34.10 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 1.26 W/kg

**SAR(1 g) = 0.649 W/kg; SAR(10 g) = 0.362 W/kg**

Maximum value of SAR (measured) = 1.02 W/kg

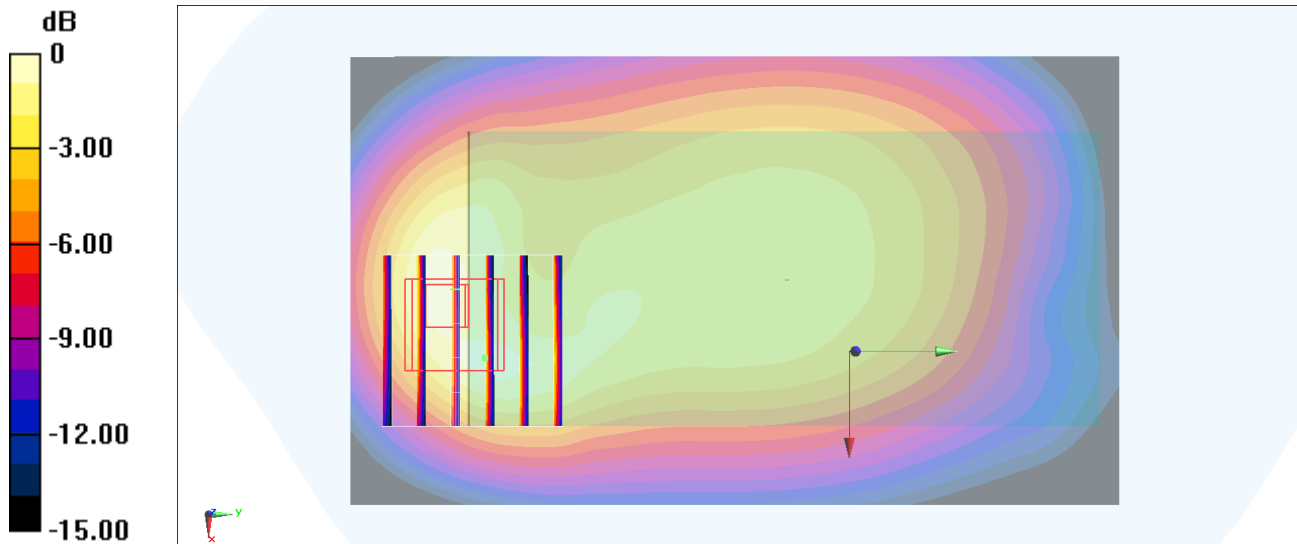

0 dB = 1.02 W/kg = 0.09 dBW/kg

**#53\_CDMA BC0\_1xRTT RC3 SO32\_Back\_10mm\_Ch384**

Communication System: CDMA; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium: HSL\_850\_190423 Medium parameters used:  $f = 837$  MHz;  $\sigma = 0.91$  S/m;  $\epsilon_r = 42.517$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(10.19, 10.19, 10.19) @ 836.52 MHz; Calibrated: 2019/1/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1424; Calibrated: 2019/1/24
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1682
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

**Area Scan (71x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.913 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 34.16 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.28 W/kg

**SAR(1 g) = 0.659 W/kg; SAR(10 g) = 0.367 W/kg**

Maximum value of SAR (measured) = 1.04 W/kg

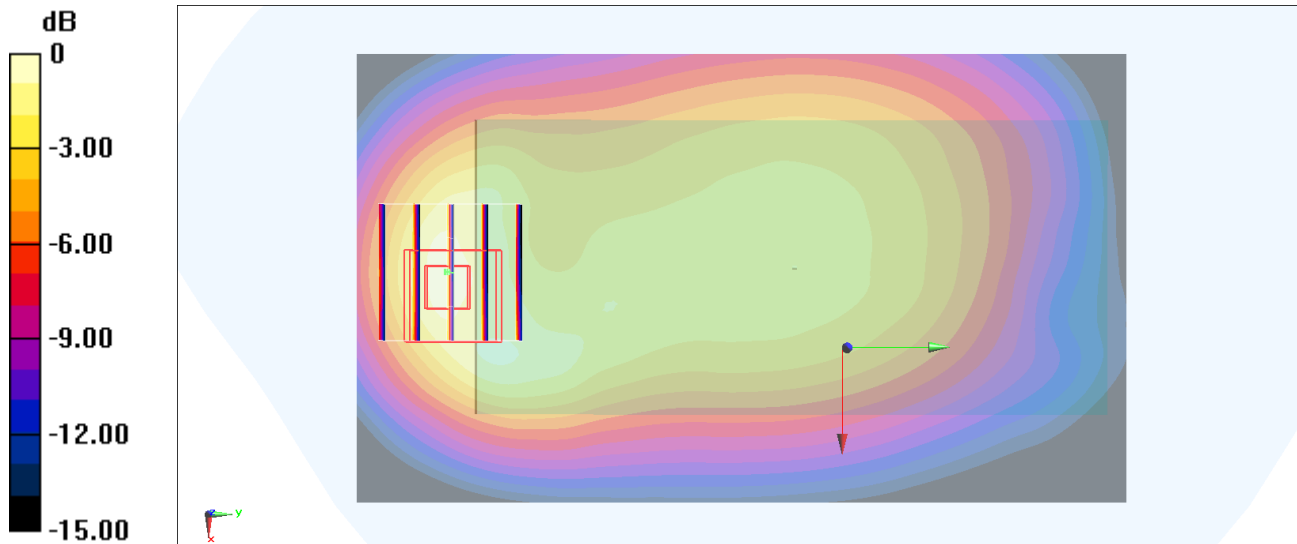

0 dB = 1.04 W/kg = 0.17 dBW/kg

### #54\_CDMA BC1\_1xRTT RC3 SO32\_Back\_10mm\_Ch600


Communication System: CDMA; Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium: HSL\_1900\_190602 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.387$  S/m;  $\epsilon_r = 40.768$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.3 °C

#### DASY5 Configuration:

- Probe: ES3DV3 - SN3124; ConvF(4.95, 4.95, 4.95) @ 1880 MHz; Calibrated: 2019/1/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn316; Calibrated: 2019/1/3
- Phantom: SAM-Middle; Type: SAM; Serial: 1796
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

**Area Scan (61x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 1.03 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 19.57 V/m; Power Drift = -0.08 dB  
Peak SAR (extrapolated) = 1.65 W/kg  
**SAR(1 g) = 0.899 W/kg; SAR(10 g) = 0.459 W/kg**  
Maximum value of SAR (measured) = 1.12 W/kg

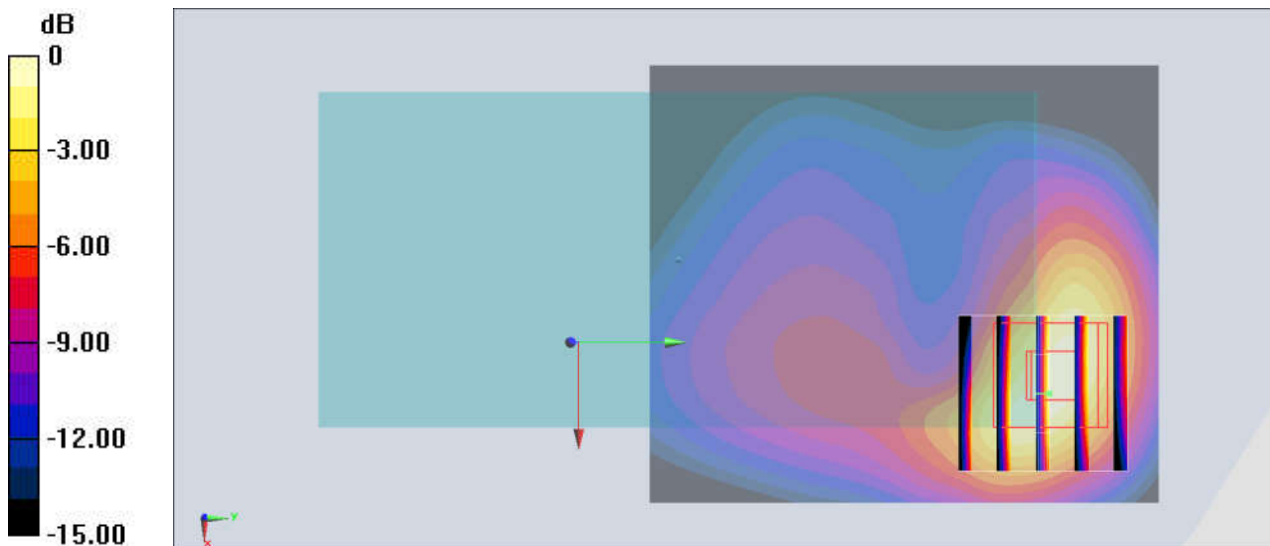

0 dB = 1.12 W/kg = 0.49 dBW/kg

## #55\_CDMA BC0\_1xRTT RC3 SO32\_Back\_10mm\_Ch580

Communication System: CDMA; Frequency: 820.5 MHz; Duty Cycle: 1:1

Medium: HSL\_850\_190423 Medium parameters used:  $f = 820.5$  MHz;  $\sigma = 0.9$  S/m;  $\epsilon_r = 42.763$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(10.19, 10.19, 10.19) @ 820.5 MHz; Calibrated: 2019/1/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1424; Calibrated: 2019/1/24
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1682
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

**Area Scan (71x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.833 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 32.85 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 1.16 W/kg

**SAR(1 g) = 0.601 W/kg; SAR(10 g) = 0.336 W/kg**

Maximum value of SAR (measured) = 0.939 W/kg

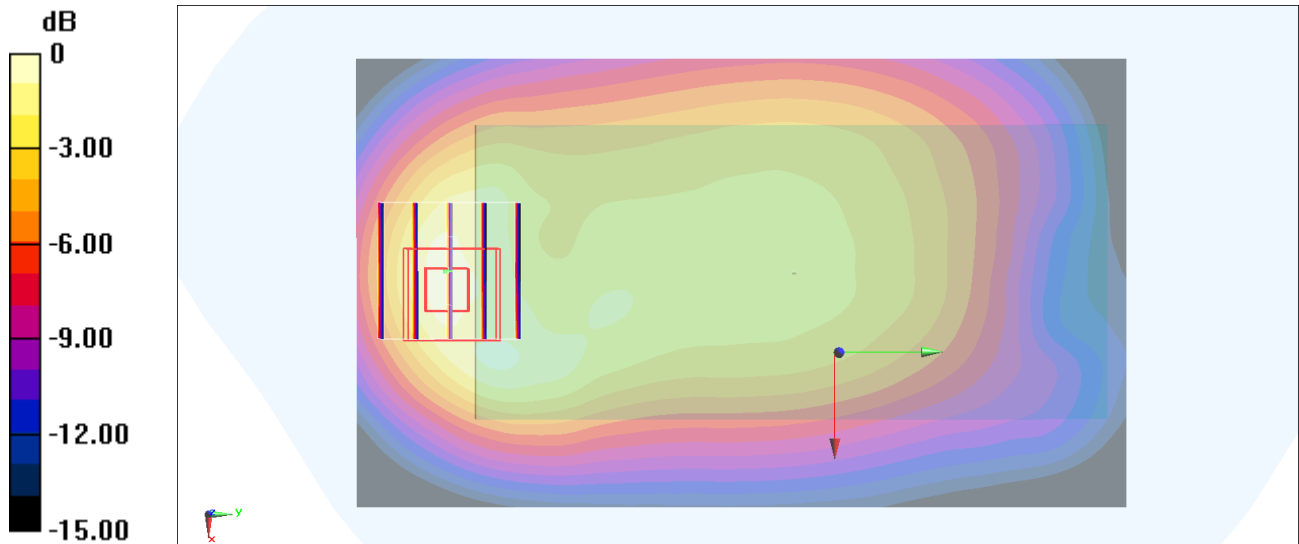

0 dB = 0.939 W/kg = -0.27 dBW/kg



### #56\_LTE Band 7\_20M\_QPSK\_50\_50\_Back\_10mm\_Ch20850


Communication System: LTE; Frequency: 2510 MHz; Duty Cycle: 1:1  
Medium: HSL\_2600\_190613 Medium parameters used:  $f = 2510$  MHz;  $\sigma = 1.918$  S/m;  $\epsilon_r = 39.16$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.2 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3925; ConvF(7.43, 7.43, 7.43) @ 2510 MHz; Calibrated: 2019/5/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2019/5/21
- Phantom: SAM-Right; Type: SAM; Serial: TP-1503
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (81x81x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm  
Maximum value of SAR (interpolated) = 1.45 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 24.69 V/m; Power Drift = -0.16 dB  
Peak SAR (extrapolated) = 2.00 W/kg  
**SAR(1 g) = 0.932 W/kg; SAR(10 g) = 0.416 W/kg**  
Maximum value of SAR (measured) = 1.54 W/kg

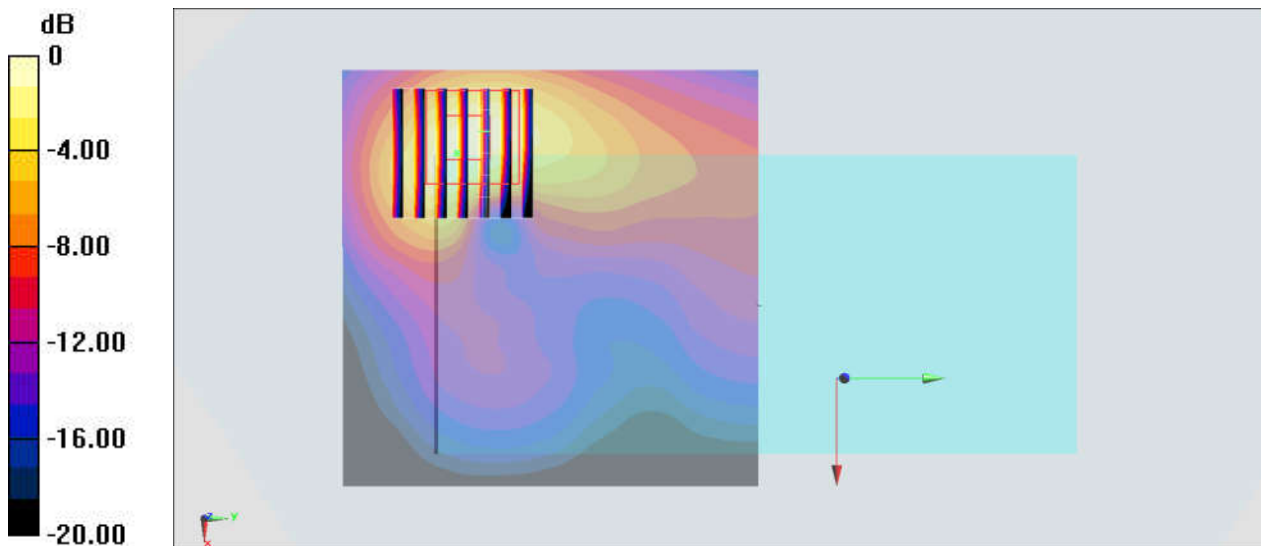

0 dB = 1.54 W/kg = 1.88 dBW/kg

### #57\_LTE Band 12\_10M\_QPSK\_1\_25\_Front\_10mm\_Ch23095


Communication System: LTE; Frequency: 707.5 MHz; Duty Cycle: 1:1  
Medium: HSL\_750\_190601 Medium parameters used:  $f = 707.5$  MHz;  $\sigma = 0.859$  S/m;  $\epsilon_r = 41.122$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.6 °C

#### DASY5 Configuration:

- Probe: ES3DV3 - SN3124; ConvF(6.15, 6.15, 6.15) @ 707.5 MHz; Calibrated: 2019/1/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn316; Calibrated: 2019/1/3
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1431
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

**Area Scan (71x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.477 W/kg

**/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 21.39 V/m; Power Drift = -0.05 dB  
Peak SAR (extrapolated) = 0.638 W/kg  
**SAR(1 g) = 0.411 W/kg; SAR(10 g) = 0.274 W/kg**  
Maximum value of SAR (measured) = 0.476 W/kg

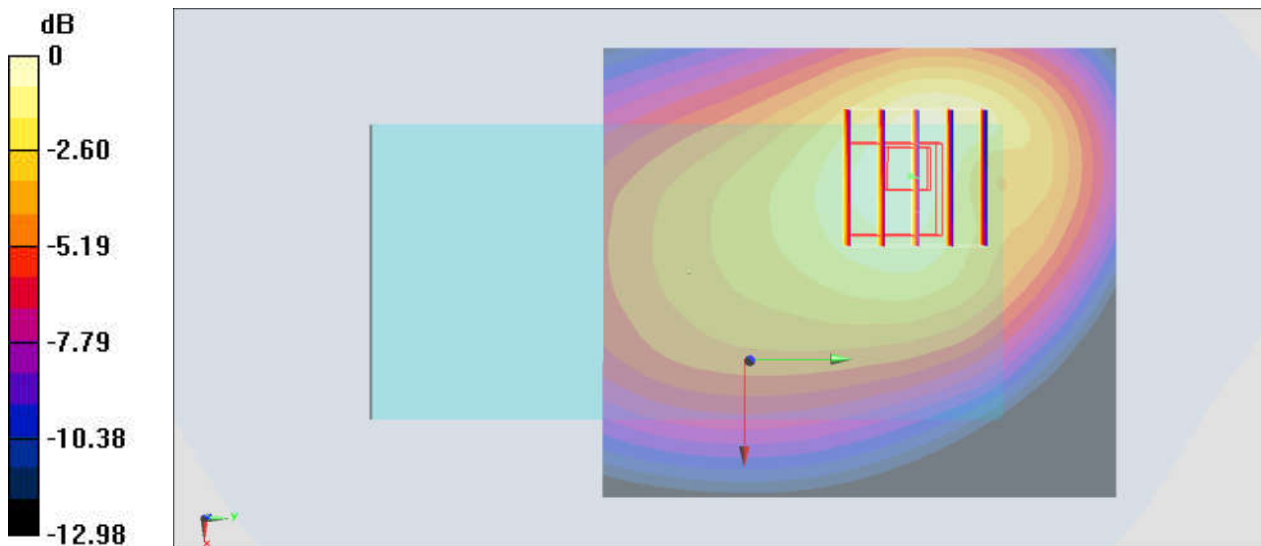

0 dB = 0.476 W/kg = -3.22 dBW/kg

### #58\_LTE Band 13\_10M\_QPSK\_1\_25\_Front\_10mm\_Ch23230

Communication System: LTE; Frequency: 782 MHz; Duty Cycle: 1:1

Medium: HSL\_750\_190601 Medium parameters used:  $f = 782 \text{ MHz}$ ;  $\sigma = 0.929 \text{ S/m}$ ;  $\epsilon_r = 40.165$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature :  $23.6 \text{ }^\circ\text{C}$ ; Liquid Temperature :  $22.6 \text{ }^\circ\text{C}$

#### DASY5 Configuration:

- Probe: ES3DV3 - SN3124; ConvF(6.15, 6.15, 6.15) @ 782 MHz; Calibrated: 2019/1/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn316; Calibrated: 2019/1/3
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1431
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

**Area Scan (71x81x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) =  $0.644 \text{ W/kg}$


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $23.95 \text{ V/m}$ ; Power Drift =  $0.05 \text{ dB}$

Peak SAR (extrapolated) =  $0.856 \text{ W/kg}$

**SAR(1 g) =  $0.544 \text{ W/kg}$ ; SAR(10 g) =  $0.364 \text{ W/kg}$**

Maximum value of SAR (measured) =  $0.637 \text{ W/kg}$

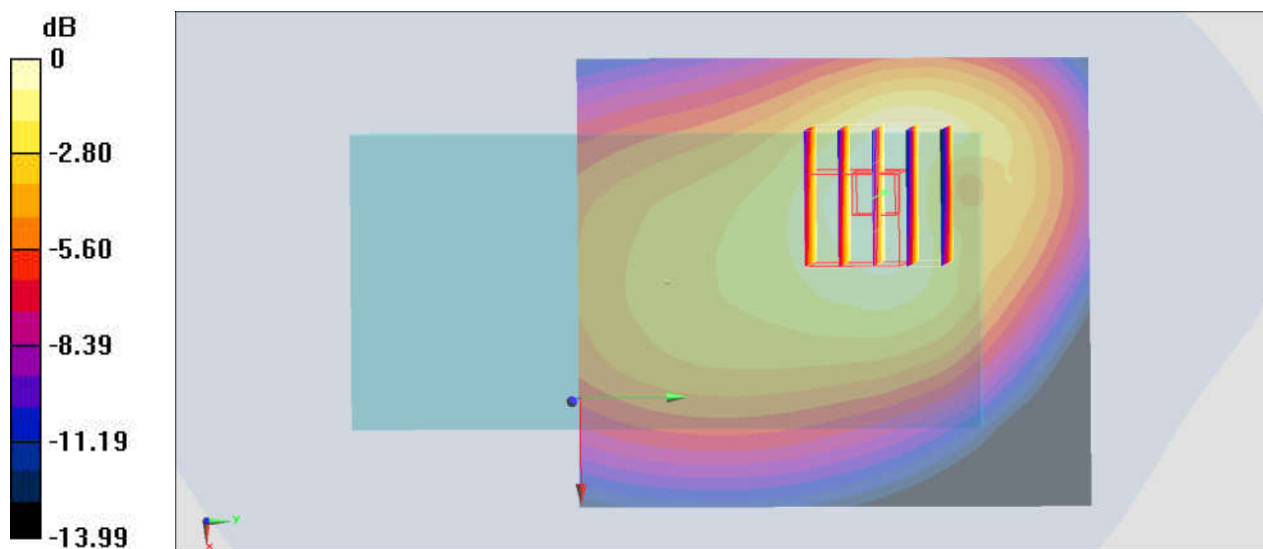

0 dB =  $0.637 \text{ W/kg} = -1.96 \text{ dBW/kg}$

### #59\_LTE Band 14\_10M\_QPSK\_1\_0\_Back\_10mm\_Ch23330


Communication System: LTE; Frequency: 793 MHz; Duty Cycle: 1:1  
Medium: HSL\_750\_190601 Medium parameters used:  $f = 793 \text{ MHz}$ ;  $\sigma = 0.939 \text{ S/m}$ ;  $\epsilon_r = 40.029$ ;  $\rho = 1000 \text{ kg/m}^3$   
Ambient Temperature :  $23.6 \text{ }^\circ\text{C}$ ; Liquid Temperature :  $22.6 \text{ }^\circ\text{C}$

#### DASY5 Configuration:

- Probe: ES3DV3 - SN3124; ConvF(6.15, 6.15, 6.15) @ 793 MHz; Calibrated: 2019/1/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn316; Calibrated: 2019/1/3
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1431
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

**Area Scan (71x81x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
Maximum value of SAR (interpolated) =  $0.641 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
Reference Value =  $24.20 \text{ V/m}$ ; Power Drift =  $0.07 \text{ dB}$   
Peak SAR (extrapolated) =  $0.855 \text{ W/kg}$   
**SAR(1 g) =  $0.546 \text{ W/kg}$ ; SAR(10 g) =  $0.364 \text{ W/kg}$**   
Maximum value of SAR (measured) =  $0.640 \text{ W/kg}$

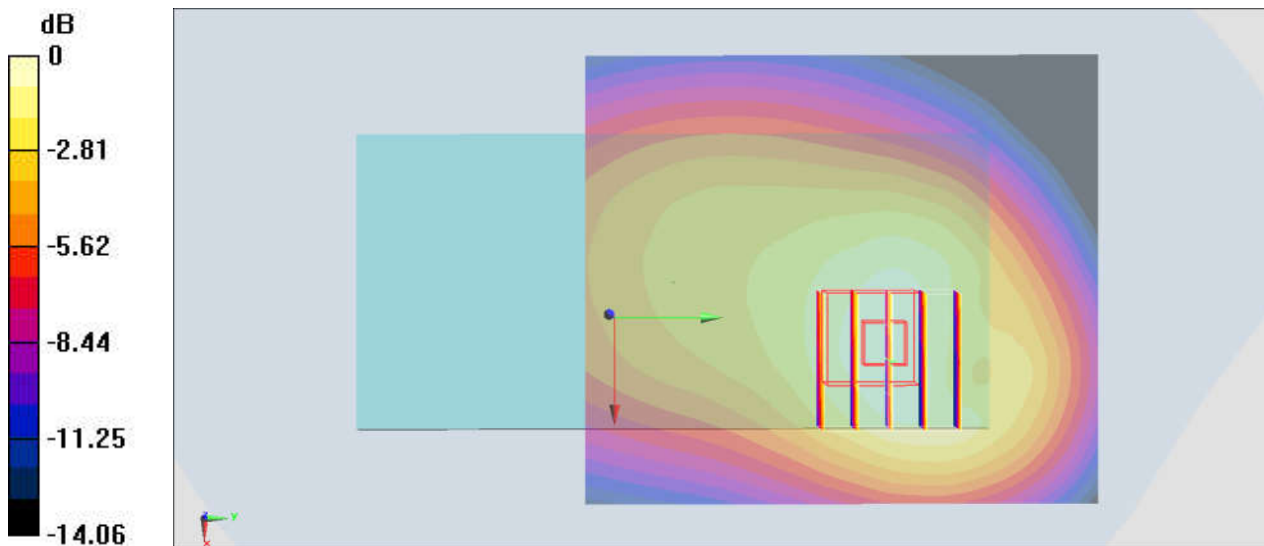

0 dB =  $0.640 \text{ W/kg} = -1.94 \text{ dBW/kg}$

### #60\_LTE Band 25\_20M\_QPSK\_1\_0\_Back\_10mm\_Ch26140


Communication System: LTE; Frequency: 1860 MHz; Duty Cycle: 1:1  
Medium: HSL\_1900\_190614 Medium parameters used:  $f = 1860$  MHz;  $\sigma = 1.416$  S/m;  $\epsilon_r = 40.279$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.6 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3925; ConvF(8.46, 8.46, 8.46) @ 1860 MHz; Calibrated: 2019/5/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2019/5/21
- Phantom: SAM-Middle; Type: SAM; Serial: 1796
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (71x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 1.35 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 27.25 V/m; Power Drift = -0.03 dB  
Peak SAR (extrapolated) = 1.54 W/kg  
**SAR(1 g) = 0.962 W/kg; SAR(10 g) = 0.607 W/kg**  
Maximum value of SAR (measured) = 1.31 W/kg

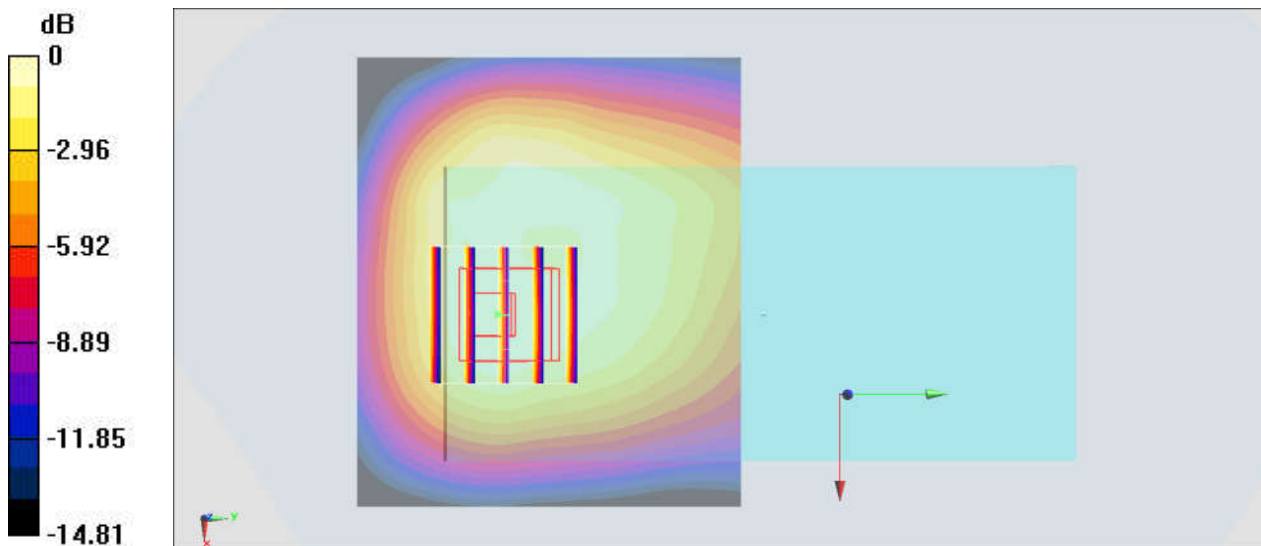

0 dB = 1.31 W/kg = 1.17 dBW/kg

## #61\_LTE Band 26\_15M\_QPSK\_1\_0\_Back\_10mm\_Ch26865

Communication System: LTE ; Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium: HSL\_850\_190422 Medium parameters used :  $f = 831.5$  MHz;  $\sigma = 0.91$  S/m;  $\epsilon_r = 42.707$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(10.19, 10.19, 10.19) @ 831.5 MHz; Calibrated: 2019/1/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1424; Calibrated: 2019/1/24
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1682
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

**Area Scan (61x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.858 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.70 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.14 W/kg

**SAR(1 g) = 0.589 W/kg; SAR(10 g) = 0.328 W/kg**

Maximum value of SAR (measured) = 0.884 W/kg

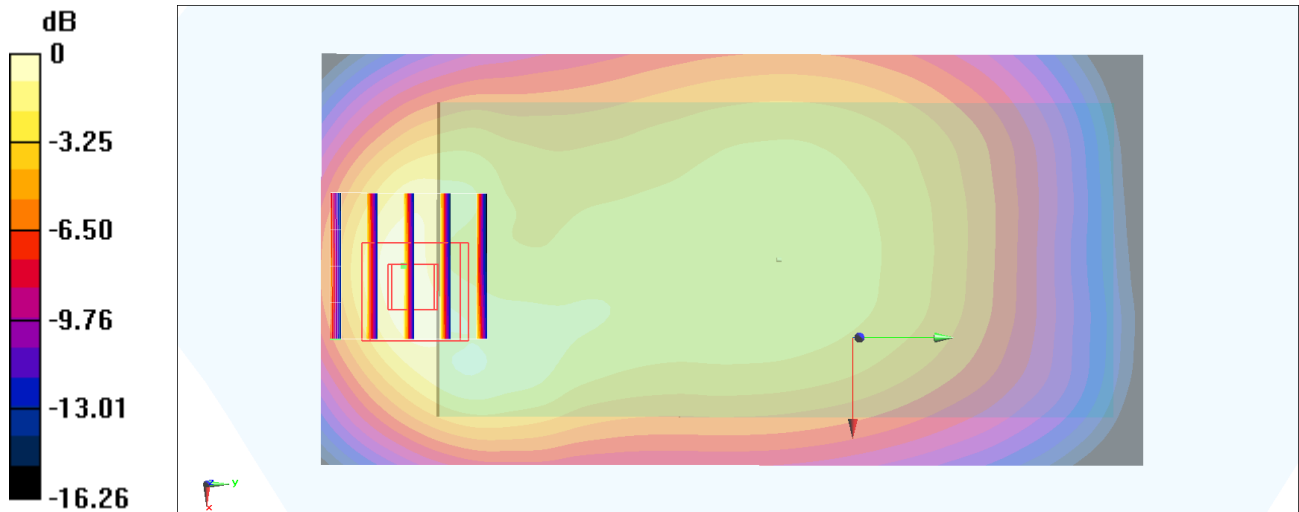

0 dB = 0.884 W/kg = -0.54 dBW/kg

### #62\_LTE Band 30\_10M\_QPSK\_50\_0\_Back\_10mm\_Ch27710


Communication System: LTE; Frequency: 2310 MHz; Duty Cycle: 1:1  
Medium: HSL\_2300\_190615 Medium parameters used:  $f = 2310$  MHz;  $\sigma = 1.607$  S/m;  $\epsilon_r = 40.24$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.6 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3925; ConvF(7.97, 7.97, 7.97) @ 2310 MHz; Calibrated: 2019/5/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2019/5/21
- Phantom: SAM-Right; Type: SAM; Serial: TP-1503
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (81x81x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm  
Maximum value of SAR (interpolated) = 1.35 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 22.08 V/m; Power Drift = -0.18 dB  
Peak SAR (extrapolated) = 1.93 W/kg  
**SAR(1 g) = 0.887 W/kg; SAR(10 g) = 0.405 W/kg**  
Maximum value of SAR (measured) = 1.46 W/kg

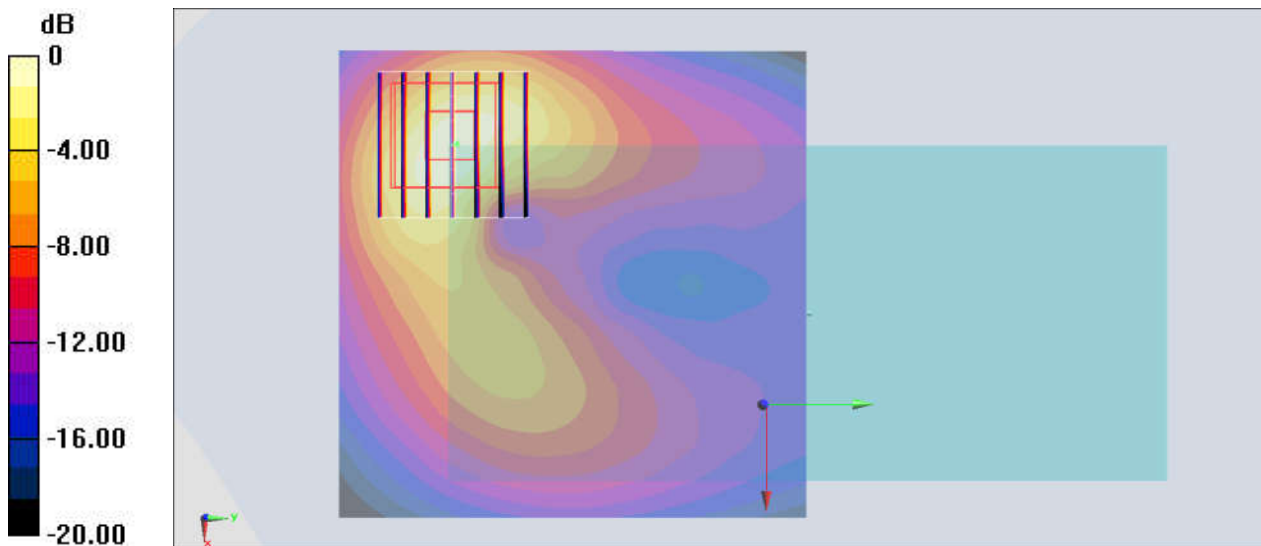

0 dB = 1.46 W/kg = 1.64 dBW/kg

**#63\_LTE Band 66\_20M\_QPSK\_1\_0\_Back\_10mm\_Ch132572**

Communication System: LTE; Frequency: 1770 MHz; Duty Cycle: 1:1

Medium: HSL\_1750\_190426 Medium parameters used:  $f = 1770$  MHz;  $\sigma = 1.367$  S/m;  $\epsilon_r = 41.456$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(8.73, 8.73, 8.73) @ 1770 MHz; Calibrated: 2019/1/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1424; Calibrated: 2019/1/24
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1682
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

**Area Scan (71x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.09 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 27.61 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.34 W/kg

**SAR(1 g) = 0.750 W/kg; SAR(10 g) = 0.470 W/kg**

Maximum value of SAR (measured) = 1.09 W/kg

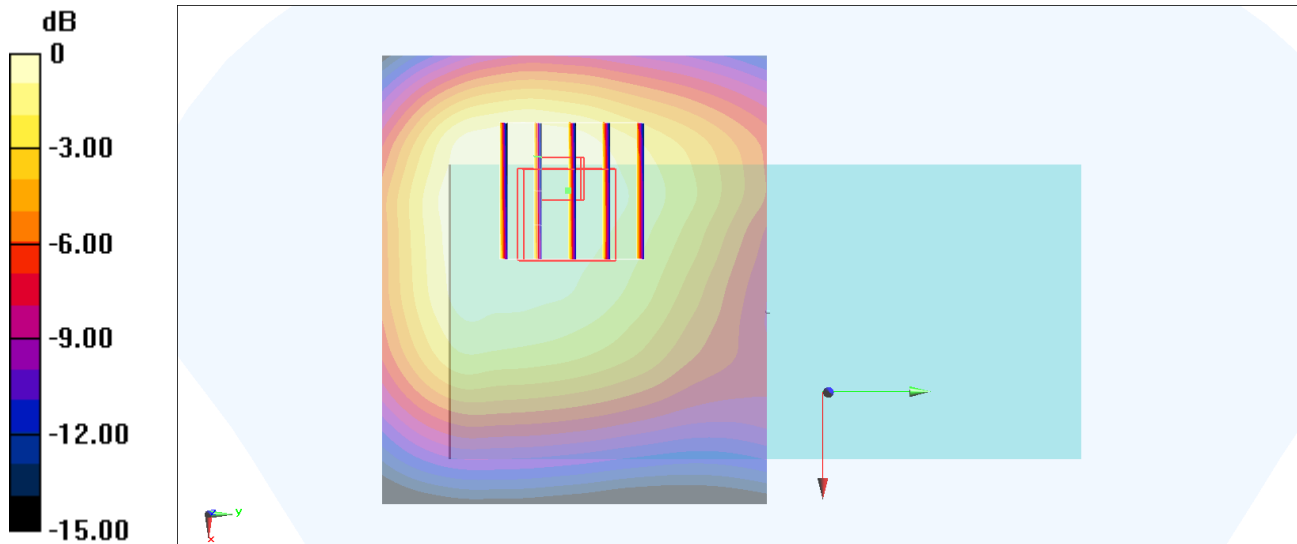

0 dB = 1.09 W/kg = 0.37 dBW/kg



**#64\_LTE Band 71\_20M\_QPSK\_1\_0\_Back\_10mm\_Ch133297**

Communication System: LTE; Frequency: 680.5 MHz; Duty Cycle: 1:1

Medium: HSL\_750\_190413 Medium parameters used:  $f = 680.5$  MHz;  $\sigma = 0.849$  S/m;  $\epsilon_r = 41.334$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(10.4, 10.4, 10.4) @ 680.5 MHz; Calibrated: 2019/1/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1424; Calibrated: 2019/1/24
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1682
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

**Area Scan (61x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.435 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.81 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.525 W/kg

**SAR(1 g) = 0.297 W/kg; SAR(10 g) = 0.197 W/kg**

Maximum value of SAR (measured) = 0.421 W/kg

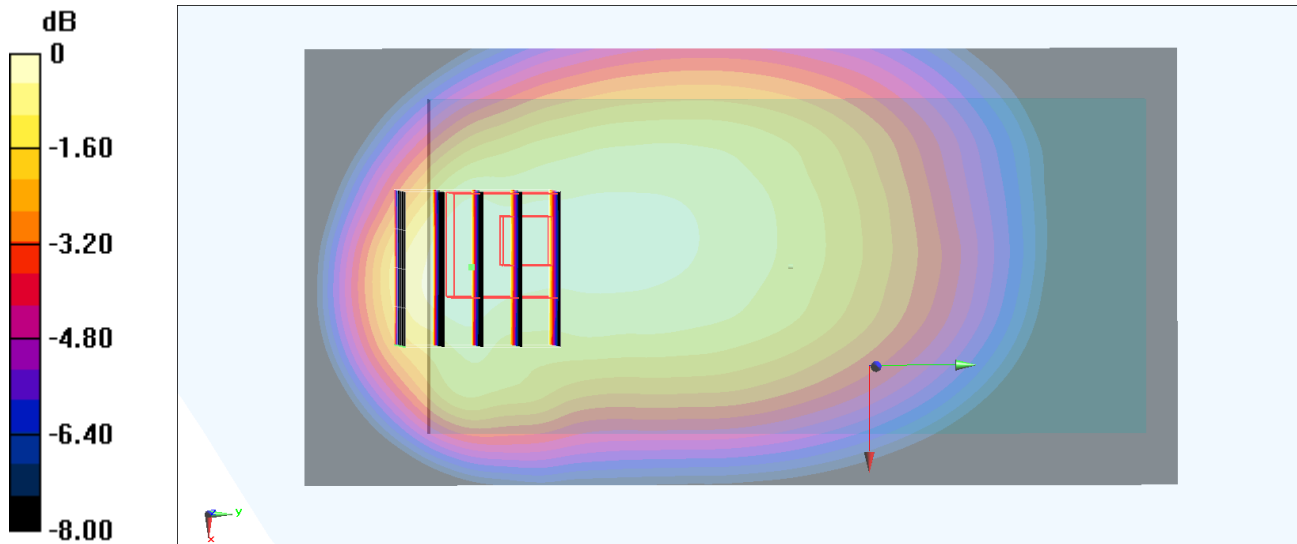

0 dB = 0.421 W/kg = -3.76 dBW/kg

**#65\_LTE Band 41\_20M\_QPSK\_50\_50\_Back\_10mm\_Ch39750**


Communication System: LTE; Frequency: 2506 MHz; Duty Cycle: 1:1.59  
 Medium: HSL\_2600\_190615 Medium parameters used :  $f = 2506$  MHz;  $\sigma = 1.84$  S/m;  $\epsilon_r = 39.571$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
 Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.6 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3925; ConvF(7.43, 7.43, 7.43) @ 2506 MHz; Calibrated: 2019/5/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2019/5/21
- Phantom: SAM-Right; Type: SAM; Serial: TP-1503
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (81x81x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm  
 Maximum value of SAR (interpolated) = 1.38 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 24.46 V/m; Power Drift = -0.08 dB  
 Peak SAR (extrapolated) = 1.91 W/kg  
**SAR(1 g) = 0.893 W/kg; SAR(10 g) = 0.399 W/kg**  
 Maximum value of SAR (measured) = 1.51 W/kg

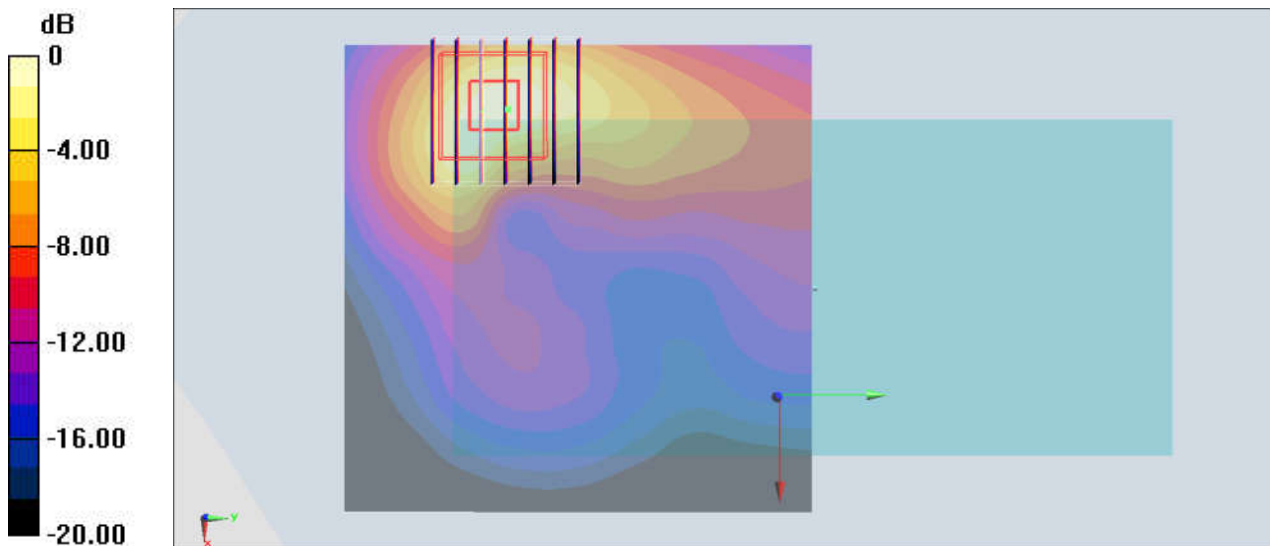

0 dB = 1.51 W/kg = 1.79 dBW/kg

**#66\_LTE Band 48\_20M\_QPSK\_1\_49\_Back\_10mm\_Ch55340**

Communication System: LTE; Frequency: 3560 MHz; Duty Cycle: 1:1.59

Medium: HSL\_3500\_190615 Medium parameters used:  $f = 3560$  MHz;  $\sigma = 3.015$  S/m;  $\epsilon_r = 38.913$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(7.2, 7.2, 7.2) @ 3560 MHz; Calibrated: 2018/9/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1399; Calibrated: 2018/11/16
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1682
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (91x81x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.737 W/kg


**Zoom Scan (7x7x8)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=4mm

Reference Value = 14.41 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.993 W/kg

**SAR(1 g) = 0.412 W/kg; SAR(10 g) = 0.181 W/kg**

Maximum value of SAR (measured) = 0.751 W/kg

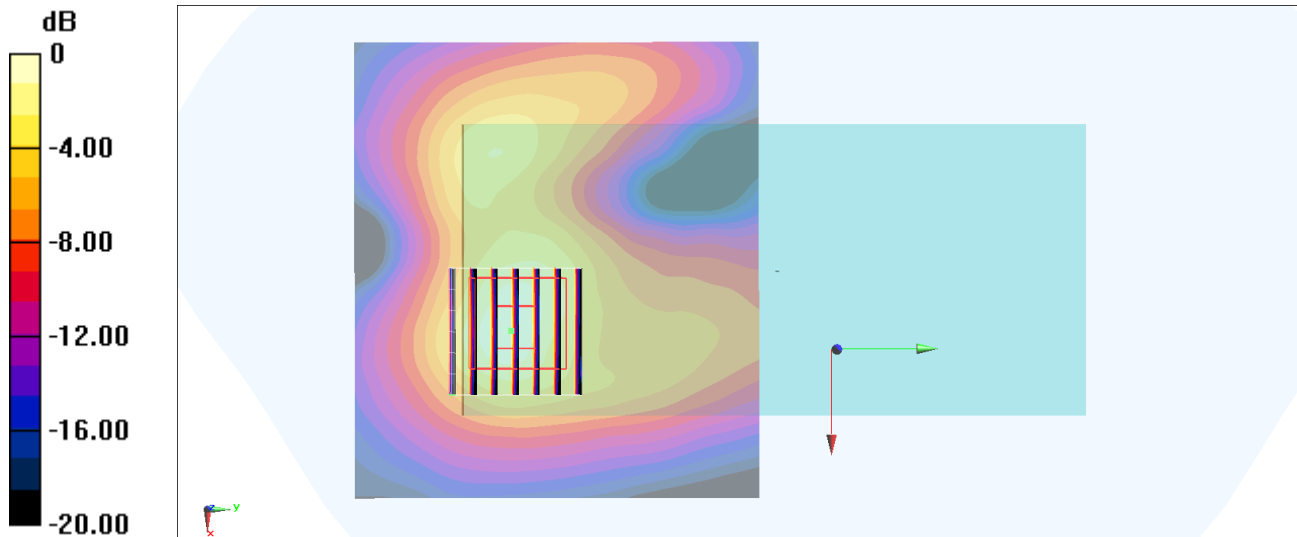

0 dB = 0.751 W/kg = -1.24 dBW/kg

### #67\_WLAN2.4GHz\_802.11b 1Mbps\_Back\_10mm\_Ch6;Ant 3


Communication System: 802.11b ; Frequency: 2437 MHz;Duty Cycle: 1:1.005  
Medium: HSL\_2450\_190622 Medium parameters used :  $f = 2437$  MHz;  $\sigma = 1.79$  S/m;  $\epsilon_r = 40.055$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.4 °C

#### DASY5 Configuration

- Probe: EX3DV4 - SN7515;ConvF(7.42, 7.42, 7.42) @ 2437 MHz;Calibrated: 2018/10/3
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn360; Calibrated: 2018/10/29
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1885
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

**Area Scan (81x81x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm  
Maximum value of SAR (interpolated) = 1.43 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 22.69 V/m; Power Drift = -0.17 dB  
Peak SAR (extrapolated) = 1.78 W/kg  
**SAR(1 g) = 0.865 W/kg; SAR(10 g) = 0.407 W/kg**  
Maximum value of SAR (measured) = 1.43 W/kg

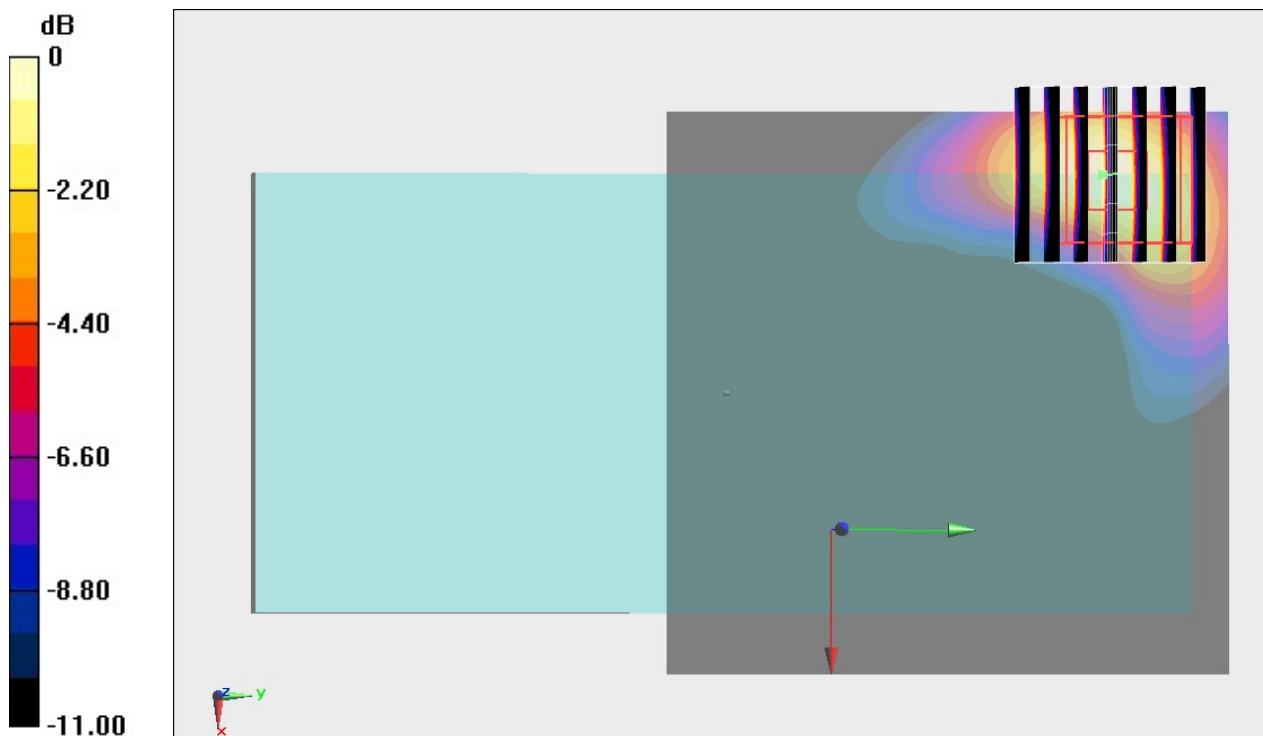

0 dB = 1.43 W/kg = 1.55 dBW/kg

### #68\_WLAN5GHz\_802.11n-HT40 MCS0\_Back\_10mm\_Ch54;Ant 2


Communication System: 802.11n ; Frequency: 5270 MHz;Duty Cycle: 1:1.048  
Medium: HSL\_5G\_190615 Medium parameters used:  $f = 5270$  MHz;  $\sigma = 4.696$  S/m;  $\epsilon_r = 36.901$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.7 °C ; Liquid Temperature : 22.7 °C

#### DASY5 Configuration

- Probe: EX3DV4 - SN7515;ConvF(5.45, 5.45, 5.45) @ 5270 MHz;Calibrated: 2018/10/3
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn360; Calibrated: 2018/10/29
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1885
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

**Area Scan (121x101x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
Maximum value of SAR (interpolated) = 1.13 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 10.37 V/m; Power Drift = 0.14 dB  
Peak SAR (extrapolated) = 1.80 W/kg  
**SAR(1 g) = 0.510 W/kg; SAR(10 g) = 0.206 W/kg**  
Maximum value of SAR (measured) = 1.12 W/kg

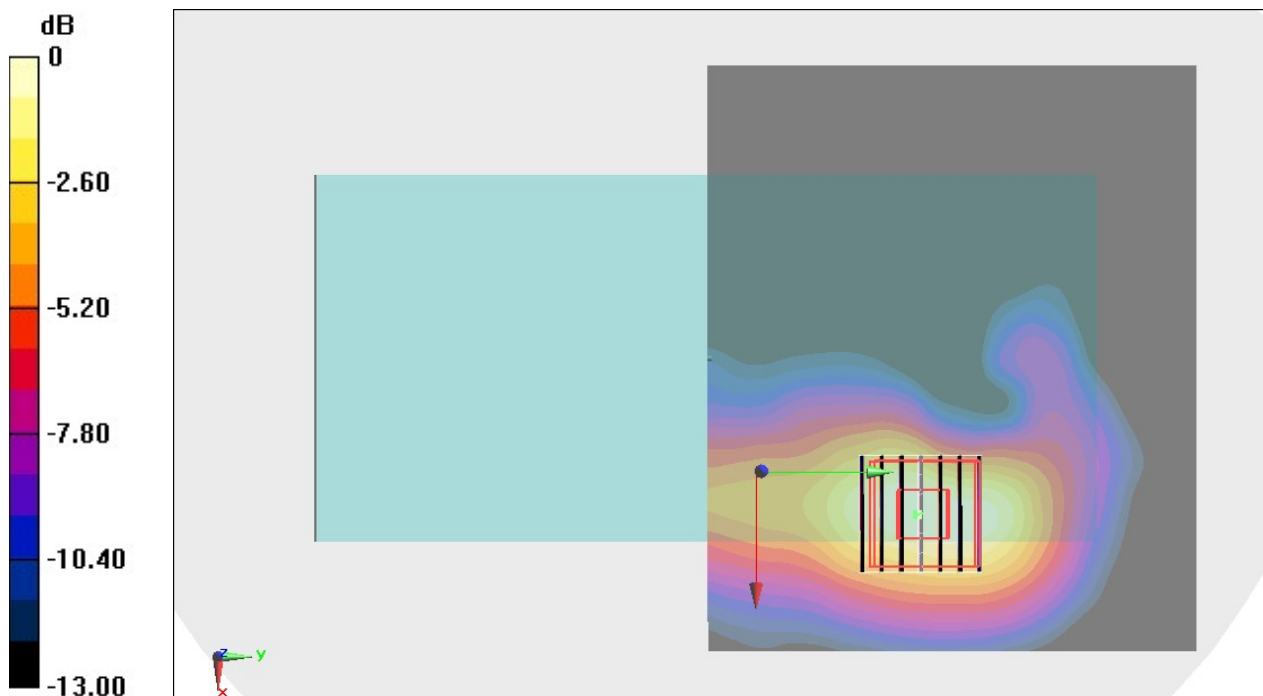

0 dB = 1.12 W/kg = 0.49 dBW/kg

### #69\_WLAN5GHz\_802.11ac-VHT80 MCS0\_Back\_10mm\_Ch138;Ant 5


Communication System: 802.11ac ; Frequency: 5690 MHz;Duty Cycle: 1:1.1  
Medium: HSL\_5G\_190615 Medium parameters used :  $f = 5690$  MHz;  $\sigma = 5.128$  S/m;  $\epsilon_r = 36.33$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.7 °C ; Liquid Temperature : 22.7 °C

#### DASY5 Configuration

- Probe: EX3DV4 - SN7515;ConvF(4.95, 4.95, 4.95) @ 5690 MHz;Calibrated: 2018/10/3
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn360; Calibrated: 2018/10/29
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1885
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

**Area Scan (91x71x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
Maximum value of SAR (interpolated) = 1.27 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 8.144 V/m; Power Drift = -0.16 dB  
Peak SAR (extrapolated) = 2.18 W/kg  
**SAR(1 g) = 0.506 W/kg; SAR(10 g) = 0.154 W/kg**  
Maximum value of SAR (measured) = 1.27 W/kg

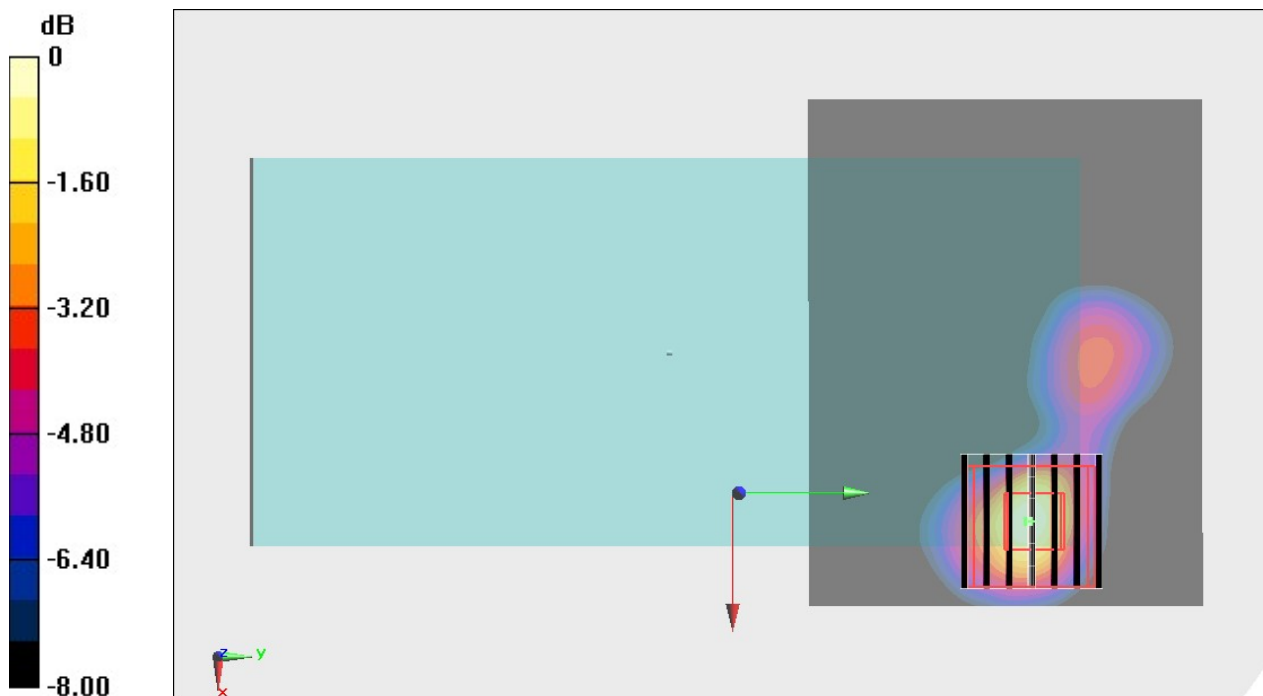

0 dB = 1.27 W/kg = 1.04 dBW/kg

### #70\_WLAN5GHz\_802.11ac-VHT80 MCS0\_Back\_10mm\_Ch155;Ant 5

Communication System: 802.11ac ; Frequency: 5775 MHz;Duty Cycle: 1:1.1

Medium: HSL\_5G\_190615 Medium parameters used:  $f = 5775$  MHz;  $\sigma = 5.218$  S/m;  $\epsilon_r = 36.212$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.6 °C

#### DASY5 Configuration

- Probe: EX3DV4 - SN7515;ConvF(4.95, 4.95, 4.95) @ 5775 MHz;Calibrated: 2018/10/3
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn360; Calibrated: 2018/10/29
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1885
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

**Area Scan (91x71x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.05 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 8.555 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 1.89 W/kg

**SAR(1 g) = 0.421 W/kg; SAR(10 g) = 0.125 W/kg**

Maximum value of SAR (measured) = 1.06 W/kg

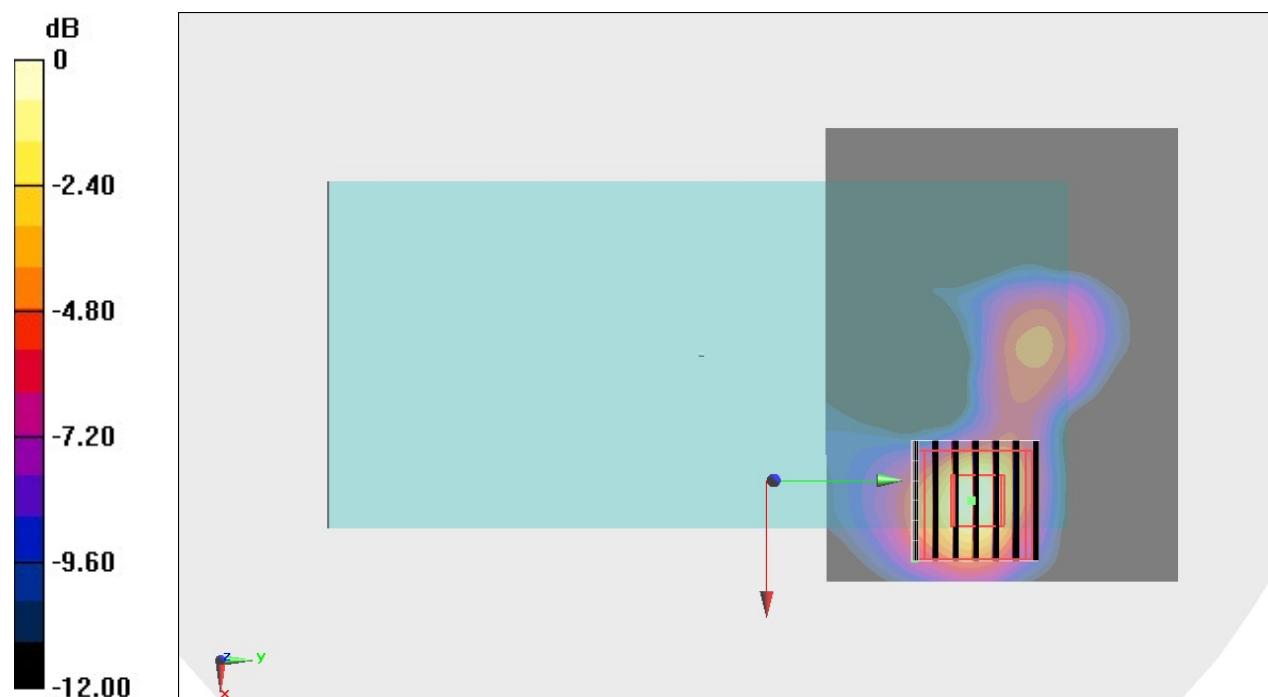

0 dB = 1.06 W/kg = 0.25 dBW/kg

### #71\_Bluetooth\_1Mbps\_Back\_10mm\_Ch00\_Ant 2


Communication System: Bluetooth; Frequency: 2402 MHz; Duty Cycle: 1:1.301  
Medium: HSL\_2450\_190625 Medium parameters used :  $f = 2402$  MHz;  $\sigma = 1.755$  S/m;  $\epsilon_r = 40.196$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

#### DASY5 Configuration

- Probe: EX3DV4 - SN7515; ConvF(7.42, 7.42, 7.42) @ 2402 MHz; Calibrated: 2018/10/3
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn360; Calibrated: 2018/10/29
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1885
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

**Area Scan (71x71x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm  
Maximum value of SAR (interpolated) = 0.126 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 2.938 V/m; Power Drift = 0.06 dB  
Peak SAR (extrapolated) = 0.203 W/kg  
**SAR(1 g) = 0.103 W/kg; SAR(10 g) = 0.053 W/kg**  
Maximum value of SAR (measured) = 0.163 W/kg

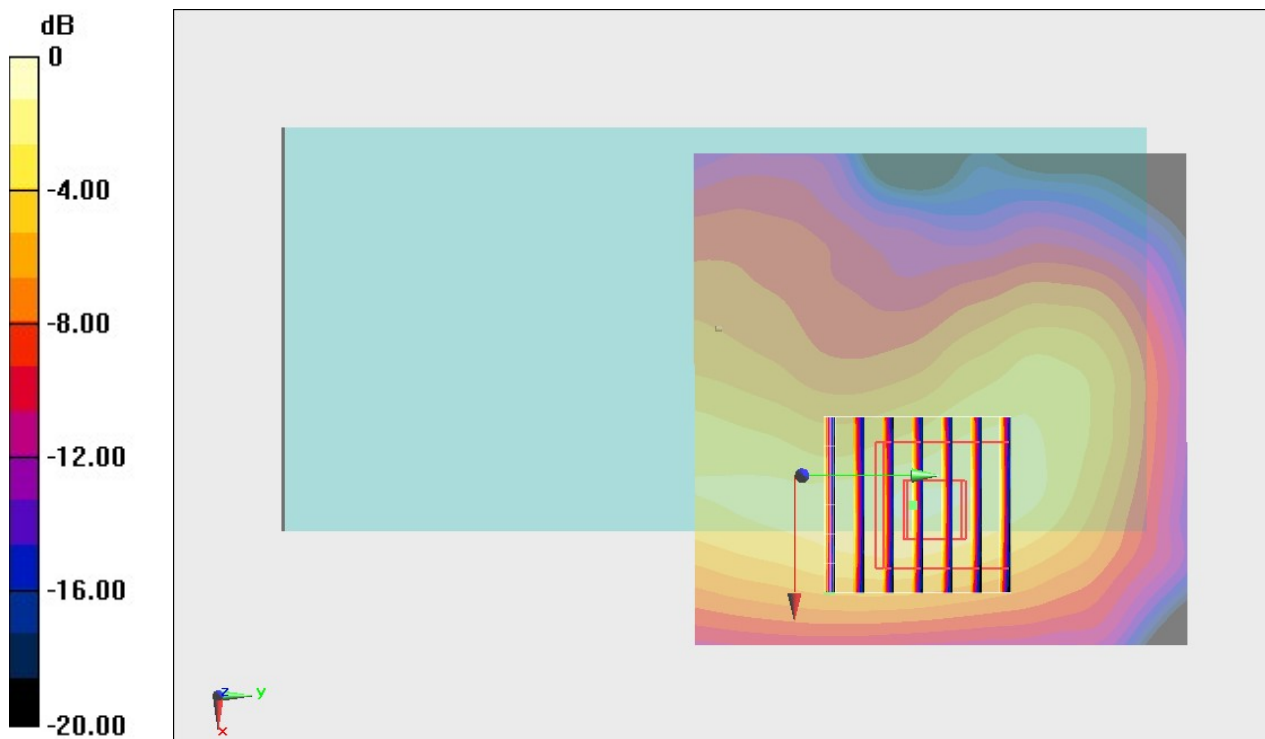

0 dB = 0.163 W/kg = -7.88 dBW/kg