





FCC RADIO TEST REPORT

FCC ID	:	A4RG020I
Equipment	:	Phone
Model Name	:	G020I
Applicant	:	Google LLC 1600 Amphitheatre Parkway,
		Mountain View, California, 94043 USA
Standard	:	47 CFR Part 2, 96

The product was received on Nov. 06, 2018 and testing was started from Apr. 14, 2019 and completed on Jun. 25, 2019. We, SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA-603-E and has been in compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

neglan

Approved by: Jones Tsai SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



Table of Contents

His	story o	f this test report	3
Su	mmary	of Test Result	4
1	Gene	ral Description	5
	1.1 1.2 1.3 1.4 1.5	Product Feature of Equipment Under Test Product Specification of Equipment Under Test Modification of EUT Testing Location Applied Standards	5 5 6
2	Test	Configuration of Equipment Under Test	7
	2.1 2.2 2.3 2.4 2.5	Test Mode Connection Diagram of Test System Support Unit used in test configuration Measurement Results Explanation Example Frequency List of Low/Middle/High Channels	9 10 10
3	Cond	ucted Test Items	12
	3.1 3.2 3.3 3.4 3.5 3.6 3.7 3.8	Measuring Instruments Conducted Output Power Peak-to-Average Ratio EIRP Power Occupied Bandwidth Conducted Band Edge Conducted Spurious Emission Frequency Stability	13 14 15 16 17 18 19
4		ited Test Items	
_	4.1 4.2 4.3 4.4	Measuring Instruments Test Setup Test Result of Radiated Test Radiated Spurious Emission	20 21 22
5		f Measuring Equipment	
6		rtainty of Evaluation	25
Ар	pendix	A. Test Results of Conducted Test	

Appendix B. Test Results of EIRP and Radiated Test



History of this test report

Report No.	Version	Description	Issued Date			
FG8N0616-05F	01	Initial issue of report	Jun. 28, 2019			
FG8N0616-05F	02	Added ACLR test procedure.	Jul. 07, 2019			
	<u> </u>					
	<u> </u>					



Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.2	§2.1046	Conducted Output Power	Reporting only	-
3.3	§96.41	Peak-to-Average Ratio	Pass	
3.4	§96.41	Effective Isotropic Radiated Power	Pass	-
3.5	§2.1049 §96.41	Occupied Bandwidth	Reporting only	-
3.6	§2.1051 §96.41	Conducted Band Edge Measurement	Pass	-
3.7	§2.1051 §96.41	Conducted Spurious Emission	Pass	
3.8	§2.1055	Frequency Stability for Temperature & Voltage	Pass	-
4.4	§2.1051 §96.41	Radiated Spurious Emission	Pass	Under limit 3.24 dB at 7360.000 MHz

Summary of Test Result

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Reviewed by: Wii Chang

Report Producer: Elise Chang

1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature									
Equipment	Phone								
Model Name	G020I								
FCC ID	A4RG020I								
	CDMA/EV-DO/GSM/EGPRS/WCDMA/HSPA/LTE/NFC/GNSS/WPC								
	WLAN 11b/g/n HT20								
EUT supports Radios	WLAN 11a/n HT20/HT40								
application	WLAN 11ac VHT20/VHT40/VHT80								
	Bluetooth BR/EDR/LE								
	60 GHz Low Power Transmitter								
EUT Stage	Identical Prototype								

Remark: The above EUT's information was declared by manufacturer.

	EUT Information List										
No.	S/N										
#1	94DAZ009N0										
#2	94DAZ009MV										

1.2 Product Specification of Equipment Under Test

Product Specification subjective to this standard									
Tx Frequency	LTE Band 48: 3552.5 MHz ~ 3697.5 MHz								
Rx Frequency	LTE Band 48: 3552.5 MHz ~ 3697.5 MHz								
Bandwidth	LTE Band 48: 5 MHz / 10 MHz / 15 MHz / 20 MHz								
Maximum Output Power to Antenna	LTE Band 48: 22.52 dBm								
Antenna Type	<ant. 0_b=""> LTE Band 48: IFA Antenna type with gain 0 dBi <ant. 0_c=""> LTE Band 48: IFA Antenna type with gain -3.5 dBi</ant.></ant.>								
Type of Modulation	QPSK / 16QAM / 64QAM								

1.3 Modification of EUT

No modifications are made to the EUT during all test items.



1.4 Testing Location

Test Site	SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory							
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978							
Test Site No.	Sporton Site No.	Sporton Site No.						
Test Sile NO.	TH05-HY	03CH07-HY						
Test Engineer	George Chen	Jesse Wang, Stan Hsieh, Troye Hsieh, Ken Wu						
Temperature	22-25 ℃	24-26 ℃						
Relative Humidity	52-55%	52-55%						

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC Designation No.: TW1190 and TW0007

1.5 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- + ANSI C63.26-2015
- ANSI / TIA-603-E
- 47 CFR Part 2, 96
- FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- FCC KDB 414788 D01 Radiated Test Site v01r01.
- FCC KDB 940660 D01 Part 96 CBRS Eqpt v02
- FCC KDB 412172 D01 Determining ERP and EIRP v01r01

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.



2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power. For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z with Accessory (Earphone or Adapter). The worst cases of panels were recorded in this report:

<Adapter Mode>

LTE Band 48	LTE Band 48_CA
Z plane for Ant. 0_B	Y Plane for Ant. 0_B
Z plane for Ant. 0_C	Z plane for Ant. 0_C

			В	andwid	lth (MH	lz)		Γ		RB #		Test Channel				
Test Items	Band	1.4	3	5	10	15	20	QPSK	16QAM	64QAM	1	Half	Full	L	м	н
Max. Output Power	48	-	-	v	v	v	v	v	v	v	v	v	v	v	v	v
EIRP Power	48	-	-	v	v	v	v	v	v	v	v		v	v	v	v
26dB and 99% Bandwidth	48	-	-	v	v	v	v	v	v	v			v	v	v	v
Conducted Band Edge	48	-	-	v	v	v	v	v	v	v	v		v	v		v
Peak-to-Aver age Ratio	48	-	-				v	v	v	v	v		v	v	v	v
Conducted Spurious Emission	48	-	-	v	v	v	v	v	v	v	v		v	v	v	v
E.R.P / E.I.R.P	48	-	-	v	v	v	v	v	v	v	v			v	v	v
Frequency Stability	48	-	-		v			v	v	v	v			v	v	v
Radiated Spurious Emission	48						w	orst Case	9					v	v	v
Remark	 The The difference rep 	e mark e device erent R orted.	"-" mea e is inve B size/	ns that estigate offset a	this ba ed from nd moo	ndwidtl 30MHz dulation	n is not to 10 t is in exp		I. Indamenta est. Subse	Il signal for equently, o						nder




Test Items	Band		Bandwidth (MHz)										Modulation			RB #			Test Channel		
	Dana	20+20	20+15	15+20	20+10	10+20	20+5	5+20	15+15	15+10	10+15	QPSK	16QAM	64QAM	1	Half	Full	L	м	н	
Max. Output Power	48_CA	v	v	v	v	v	v	v	-	-	-	v	v	v	v	v	v	v	v	v	
26dB and 99% Bandwidth	48_CA	v	v	v	v	v	v	v	-	-	-	v	v	v			v	v	v	v	
Conducted Band Edge	48_CA	v	v	>	>	>	v	v	-	-	-	v	v	v	>		v	>		v	
Conducted Spurious Emission	48_CA	v	v	v	v	v	v	v	-	-	-	v	v	v	v			v	v	v	
E.I.R.P.	48_CA	v	v	v	v	v	v	v	-	-	-	v	v	v	v			v	v	v	
Radiated Spurious Emission	48_CA								Wors	t Case	9							>	>	v	
Remark	2. The 3. The diff rep		: "-" me ce is in RB size	eans th vestig e/offse	hat this ated fr t and i	band om 30 modula	width i MHz t ations	is not s o 10 ti in exp	suppor mes o lorator	ted. f funda y test.	amenta	-		ated spu e worst (er	




2.2 Connection Diagram of Test System

<For Adapter Mode>

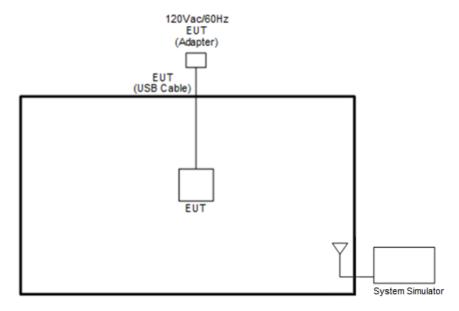

<For WPC Charging Mode>

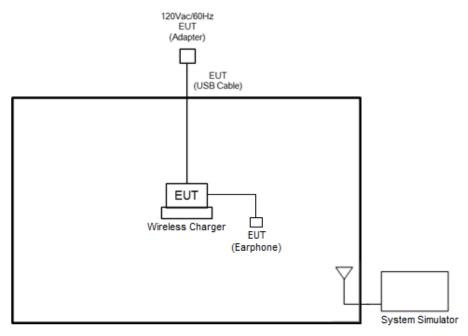

2.3 Support Unit used in test configuration

ltem	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord		
1.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m		
2.	System Simulator	Anritsu	MT8821C	N/A	N/A	Unshielded, 1.8 m		

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

Example :

Offset(dB) = RF cable loss(dB) + attenuator factor(dB).

= 4.2 + 10 = 14.2 (dB)

2.5 Frequency List of Low/Middle/High Channels

LTE Band 48 Channel and Frequency List									
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest					
20	Channel	55340	55990	56640					
20	Frequency	3560.0	3625.0	3690.0					
45	Channel	55315	55990	56665					
15	Frequency	3557.5	3625.0	3692.5					
10	Channel	55290	55990	56690					
10	Frequency	3555.0	3625.0	3695.0					
F	Channel	55265	55990	56715					
5	Frequency	3552.5	3625.0	3697.5					



LTE Band 48 Carrier Aggregation Channel and Frequency List									
	DCC	Channel	55340	55891	56442				
20 . 20	PCC	Frequency	3560.0	3615.1	3670.2				
20 + 20	000	Channel	55538	56089	56640				
	SCC	Frequency	3579.8	3634.9	3690.0				
	PCC	Channel	55340	55916	56491				
20 . 45	PCC	Frequency	3560.0	3617.6	3675.1				
20 + 15	000	Channel	55511	56087	56662				
	SCC	Frequency	3577.1	3634.7	3692.2				
	DCC	Channel	55318	55893	56469				
45 . 00	PCC	Frequency	3557.8	3615.3	3672.9				
15 + 20	SCC	Channel	55489	56064	56640				
	300	Frequency	3574.9	3632.4	3690.0				
	PCC	Channel	55340	55941	56541				
20 + 10		Frequency	3560.0	3620.1	3680.1				
20 + 10	SCC	Channel	55484	56085	56685				
	300	Frequency	3574.4	3634.5	3694.5				
	PCC	Channel	55295	55896	56496				
10 + 20	PCC	Frequency	3555.5	3615.6	3675.6				
10 + 20	SCC	Channel	55439	56040	56640				
	300	Frequency	3569.9	3630.0	3690.0				
	PCC	Channel	55340	55965	56590				
20 + 5	FUU	Frequency	3560.0	3622.5	3685.0				
20+5	SCC	Channel	55457	56082	56707				
	300	Frequency	3571.7	3634.2	3696.7				
	PCC	Channel	55273	55898	56523				
5 + 20	FUU	Frequency	3553.3	3615.8	3678.3				
5 + 20	SCC	Channel	55390	56015	56640				
	300	Frequency	3565.0	3627.5	3690.0				



3 Conducted Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.1.1 Test Setup


3.1.2 Conducted Output Power



3.1.3 Peak-to-Average Ratio, Occupied Bandwidth, Conducted Band-Edge and Conducted Spurious Emission

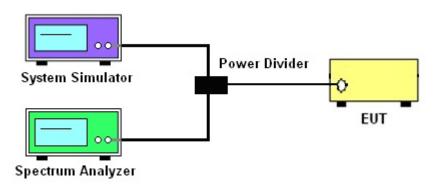

3.1.4 Frequency Stability

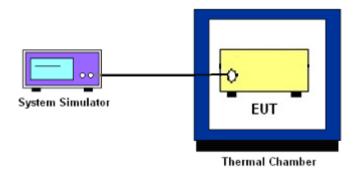

3.1.5 Test Result of Conducted Test

Please refer to Appendix A.



3.2 Conducted Output Power

3.2.1 Description of the Conducted Output Power Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

3.2.2 Test Procedures

- 1. The transmitter output port was connected to the system simulator.
- 2. Set EUT at maximum power through the system simulator.
- 3. Select lowest, middle, and highest channels for each band and different modulation.
- 4. Measure and record the power level from the system simulator.



3.3 Peak-to-Average Ratio

3.3.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.3.2 Test Procedures

The testing follows ANSI C63.26-2015 Section 5.2.6

- 1. The EUT was connected to spectrum and system simulator via a power divider.
- 2. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
- 3. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
- 4. Record the deviation as Peak to Average Ratio



3.4 EIRP Power

3.4.1 Description of the EIRP Power

The EIRP of mobile transmitters must not exceed 23 dBm /10 megahertz for LTE Band 48.

The testing follows ANSI C63.26-2015 Section 5.2.5.5

According to KDB 412172 D01 Power Approach,

 $EIRP = P_T + G_T - L_C$, where

 P_T = transmitter output power in dBm

 G_T = gain of the transmitting antenna in dBi

 L_{C} = signal attenuation in the connecting cable between the transmitter and antenna in dB

EIRP for CBRS equipment as below tabel:

Device	Maximum EIRP			
	(dBm/10 MHz)			
End User Device	23			
Category A CBSD	30			
Category B CBSD	47			

3.4.2 Test Procedures

The testing follows procedure in Section 5.2 of ANSI C63.26-2015 and KDB 940660 D01 Part 96 Eqpt v02 Section 3.2(b)(2)

Determine the EIRP by adding the effective antenna gain to the measured average conducted power level.



3.5 Occupied Bandwidth

3.5.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.5.2 Test Procedures

The testing follows ANSI C63.26-2015 Section 5.4.3 (26dB) and Section 5.4.4 (99OB)

- 1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
- The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
- 3. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
- 4. Set the detection mode to peak, and the trace mode to max hold.
- Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace. (this is the reference value)
- 6. Determine the "-26 dB down amplitude" as equal to (Reference Value X).
- 7. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the "-X dB down amplitude" determined in step 6. If a marker is below this "-X dB down amplitude" value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
- 8. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.



3.6 Conducted Band Edge

3.6.1 Description of Conducted Band Edge Measurement

The conducted power of any End User Device emission outside the fundamental emission (whether in or outside of the authorized band) shall not exceed -13 dBm/MHz within 0 to B megahertz (where B is the bandwidth in megahertz of the assigned channel or multiple contiguous channels of the End User Device) above the upper CBSD-assigned channel edge and within 0 to B megahertz below the lower CBSD-assigned channel edge. At all frequencies greater than B megahertz above the upper CBSD assigned channel edge and less than B megahertz below the lower CBSD-assigned channel edge, the conducted power of any End User Device emission shall not exceed -25 dBm/MHz. Notwithstanding the emission limits in this paragraph, the Adjacent Channel Leakage Ratio for End User Devices shall be at least 30 dB.

3.6.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.1.

- 1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
- 2. The band edges of low and high channels for the highest RF powers were measured.
- 3. Set RBW >= 1% EBW in the 1MHz band immediately outside and adjacent to the band edge.
- 4. Beyond the 1 MHz band from the band edge, RBW=1MHz was used
- 5. Set spectrum analyzer with RMS detector.
- 6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

For Adjacent Channel Leakage Ratio (ACLR) measurement,

- 1. The Adjacent Channel Leakage Ratio (ACLR) is the ratio of the average power in the assigned aggregated channel bandwidth to the average power over the equivalent adjacent channel bandwidth.
- 2. The option ACLR of spectrum analyzer is used and measures the ACLR ratio by setting equivalent channel bandwidth.
- 3. The measured ACLR ratio shall be at least 30 dB.

3.7 Conducted Spurious Emission

3.7.1 Description of Conducted Spurious Emission Measurement

Emission and interference limits: the device satisfies the emission limits specified in Section FCC Part 96.41 e) 1) ii) & e) 2) at the lowest and highest edges of the band, and in the middle of the band.

3.7.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.1.

- 1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
- The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
- 3. The middle channel for the highest RF power within the transmitting frequency was measured.
- 4. The conducted spurious emission for the whole frequency range was taken.
- 5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
- 6. Set spectrum analyzer with RMS detector.
- 7. Taking the record of maximum spurious emission.
- 8. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
- 9. The limit line is -40dBm/MHz.

3.8 Frequency Stability

3.8.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ (± 2.5 ppm) of the center frequency

3.8.2 Test Procedures for Temperature Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

- 1. The EUT was set up in the thermal chamber and connected with the system simulator.
- 2. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
- 3. With power OFF, the temperature was raised in 10°C step up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.8.3 Test Procedures for Voltage Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

- 1. The EUT was placed in a temperature chamber at 25±5° C and connected with the system simulator.
- 2. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
- 3. The variation in frequency was measured for the worst case.




4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup


For radiated emissions below 30MHz

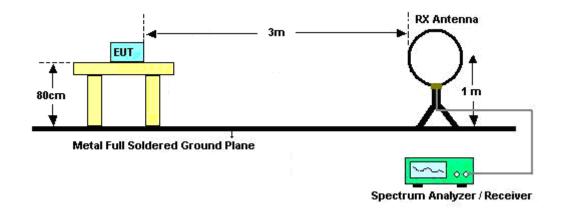


For radiated emissions from 30MHz to 1GHz

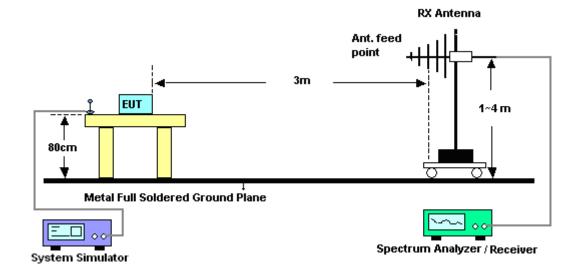

For radiated emissions from 1GHz to 18GHz

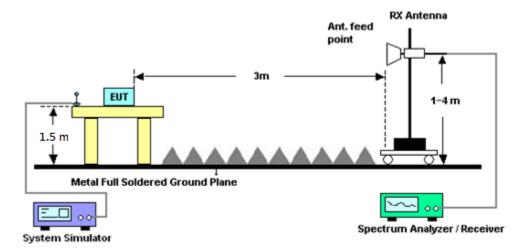

For radiated emissions above 18GHz

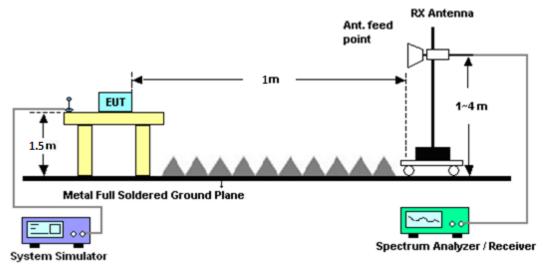

4.3 Test Result of Radiated Test

Please refer to Appendix B.

Note:

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.

4.4 Radiated Spurious Emission

4.4.1 Description of Radiated Spurious Emission Measurement

The radiated spurious emission was measured by substitution method according to ANSI / TIA-603-E. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least -40dBm / MHz.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 7 and ANSI / TIA-603-E Section 2.2.12.

- 1. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
- 2. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
- 3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
- 4. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
- 5. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
- 6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
- A horn antenna was substituted in place of the EUT and was driven by a signal generator. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.

EIRP (dBm) = S.G. Power – Tx Cable Loss + Tx Antenna Gain

- ERP (dBm) = EIRP 2.15
- 8. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is -40dBm/MHz



5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Bilog Antenna	Schaffner	CBL 6111C & N-6-06	2725 & AT-N0601	30MHz~1GHz	Jan. 10, 2019	Apr. 14, 2019~ Jun. 25, 2019	Jan. 09, 2020	Radiation (03CH07-HY)
Double Ridge Horn Antenna	ESCO	3117	00075962	1GHz ~ 18GHz	Dec. 02, 2018	Apr. 14, 2019 ~ Jun. 25, 2019	Dec. 03, 2019	Radiation (03CH07-HY)
EMI Test Receiver	Agilent	N9038A(MXE)	MY5329005 3	20Hz~26.5GHz	Jan. 23, 2019	Apr. 14, 2019 ~ Jun. 25, 2019	Jan. 22, 2020	Radiation (03CH07-HY)
Preamplifier	MITEQ	AMF-7D-0010 1800-30-10P	1590075	1GHz~18GHz	Apr. 25, 2018	Apr. 14, 2019 ~ Apr. 23, 2019	Apr. 24, 2019	Radiation (03CH07-HY)
Preamplifier	MITEQ	AMF-7D-0010 1800-30-10P	1590075	1GHz~18GHz	Apr. 24, 2019	Apr. 24, 2019 ~ Jun. 25, 2019	Apr. 23, 2020	Radiation (03CH07-HY)
Preamplifier	COM-POWER	PA-103A	161241	10MHz~1GHz	May 21, 2018	Apr. 14, 2019 ~ May 19, 2019	May 20, 2019	Radiation (03CH07-HY)
Preamplifier	COM-POWER	PA-103A	161241	10MHz~1GHz	May 20, 2019	May 20, 2019~ Jun. 25, 2019	May 19, 2020	Radiation (03CH07-HY)
Preamplifier	Agilent	8449B	3008A02362	1GHz~26.5GHz	Nov. 02, 2018	Apr. 14, 2019 ~ Jun. 25, 2019	Nov. 01, 2019	Radiation (03CH07-HY)
Filter	Microwave	H1G013G1	SN477215	1GHz High Pass Filter	Nov. 02, 2018	Apr. 14, 2019 ~ Jun. 25, 2019	Nov. 01, 2019	Radiation (03CH07-HY)
Filter	Microwave	H3G018G1	SN477220	3GHz High Pass Filter	Nov. 02, 2018	Apr. 14, 2019 ~ Jun. 25, 2019	Nov. 01, 2019	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY28655/4, MY24971/4, MY15682/4	30MHz~1GHz	Feb. 26, 2019	Apr. 14, 2019 ~ Jun. 25, 2019	Feb. 25, 2020	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY28655/4, MY24971/4, MY15682/4	1GHz~18GHz	Feb. 26, 2019	Apr. 14, 2019 ~ Jun. 25, 2019	Feb. 25, 2020	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	MY2858/2	18GHz~40GHz	Feb. 26, 2019	Apr. 14, 2019 ~ Jun. 25, 2019	Feb. 25, 2020	Radiation (03CH07-HY)
Antenna Mast	Max-Full	MFA520BS	N/A	1m~4m	N/A	Apr. 14, 2019 ~ Jun. 25, 2019	N/A	Radiation (03CH07-HY)
Turn Table	ChainTek	Chaintek 3000	N/A	0~360 Degree	N/A	Apr. 14, 2019 ~ Jun. 25, 2019	N/A	Radiation (03CH07-HY)
Filter	Wainwright	WHKX8-5272. 5-6750-18000- 40ST	SN3	6.75GHz High Pass Filter	Aug. 23, 2018	Apr. 14, 2019 ~ Jun. 25, 2019	Aug. 22, 2019	Radiation (03CH07-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA 9170	BBHA91705 84	18GHz~40GHz	Dec. 05, 2018	Apr. 14, 2019 ~ Jun. 25, 2019	Dec. 04, 2019	Radiation (03CH07-HY)
Preamplifier	EMEC	EM18G40G	060715	18GHz~40GHz	Dec. 06, 2018	Apr. 14, 2019 ~ Jun. 25, 2019	Dec. 05, 2019	Radiation (03CH07-HY)
Spectrum Analyzer	Rohde & Schwarz	FSV40	101408	10Hz~40GHz	Jul. 30, 2018	Apr. 14, 2019 ~ Jun. 25, 2019	Jul. 29, 2019	Radiation (03CH07-HY)
Signal Generator	Anritsu	MG3694C	163401	0.1Hz~40GHz	Jan. 21, 2019	Apr. 14, 2019 ~ Jun. 25, 2019	Jan. 20, 2020	Radiation (03CH07-HY)
Software	Audix	E3 6.2009-8-24	8050400465 6H	N/A	N/A	Apr. 14, 2019 ~ Jun. 25, 2019	N/A	Radiation (03CH07-HY)
Horn Antenna	ESCO	3117	00066584	1GHz~18GHz	Sep. 17, 2018	Apr. 14, 2019 ~ Jun. 25, 2019	Sep. 16, 2019	Radiation (03CH07-HY)



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Base Station(Measure)	Anritsu	MT8821C	6201664755	GSM / GPRS /WCDMA / LTE FDD/TDD with 44) /LTE-3CC DLCA,2CC ULCA	Mar. 03, 2019	Apr. 14, 2019 ~ Jun. 21, 2019	Mar. 02, 2020	Conducted (TH05-HY)
Spectrum Analyzer	Rohde & Schwarz	FSV40	101397	10Hz~40GHz	Nov. 13, 2018	Apr. 14, 2019 ~ Jun. 21, 2019	Nov. 12, 2019	Conducted (TH05-HY)
Temperature Chamber	ESPEC	SH-641	92013720	-40°C ~90°C	Aug. 29, 2018	Apr. 14, 2019 ~ Jun. 21, 2019	Aug. 28, 2019	Conducted (TH05-HY)
Programmable Power Supply	GW Instek	PSS-2005	EL890094	1V~20V 0.5A~5A	Oct. 02, 2018	Apr. 14, 2019 ~ Jun. 21, 2019	Oct. 01, 2019	Conducted (TH05-HY)
Coupler	Warison	20dB 25W SMA Directional Coupler	#A	1-18GHz	Jan. 14, 2019	Apr. 14, 2019 ~ Jun. 21, 2019	Jan. 13, 2020	Conducted (TH05-HY)



6 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of	3.05
Confidence of 95% (U = 2Uc(y))	3.05

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of	0.44
Confidence of 95% (U = 2Uc(y))	3.44

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of	2.05
Confidence of 95% (U = 2Uc(y))	3.95

Appendix A. Test Results of Conducted Test

Conducted Output Power(Average power)

	LTE Band 48 Maximum Average Power [dBm]									
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest				
20	1	0		22.45	22.22	22.44				
20	1	49		22.51	22.15	22.52				
20	1	99		22.48	22.06	22.48				
20	50	0	QPSK	21.55	21.31	21.63				
20	50	24		21.60	21.27	21.64				
20	50	50		21.59	21.28	21.63				
20	100	0		21.56	21.31	21.62				
20	1	0		21.54	21.34	21.55				
20	1	49		21.60	21.27	21.59				
20	1	99		21.54	21.20	21.55				
20	50	0	16-QAM	20.62	20.37	20.67				
20	50	24		20.68	20.34	20.66				
20	50	50		20.67	20.33	20.65				
20	100	0		20.59	20.34	20.64				
20	1	0		20.20	20.00	20.20				
20	1	49		20.25	19.92	20.21				
20	1	99		20.22	19.82	20.24				
20	50	0	64-QAM	19.66	19.26	19.67				
20	50	24		19.67	19.35	19.70				
20	50	50		19.56	19.35	19.65				
20	100	0		19.65	19.35	19.66				
15	1	0		22.45	22.22	22.49				
15	1	37		22.48	22.19	22.50				
15	1	74		22.46	22.12	22.50				
15	36	0	QPSK	21.53	21.29	21.62				
15	36	20		21.56	21.30	21.64				
15	36	39		21.53	21.25	21.61				
15	75	0		21.58	21.30	21.63				
15	1	0		21.54	21.27	21.62				
15	1	37		21.51	21.28	21.60				
15	1	74		21.58	21.19	21.63				
15	36	0	16-QAM	20.55	20.18	20.62				
15	36	20		20.56	20.30	20.65				
15	36	39		20.55	20.26	20.62				
15	75	0		20.63	20.32	20.68				
15	1	0		20.19	19.98	20.23				
15	1	37		20.21	19.93	20.28				
15	1	74	64-QAM	20.21	19.88	20.27				
15	36	0		19.59	19.33	19.68				
15	36	20		19.62	19.32	19.69				
15	36	39		19.61	19.29	19.67				
15	75	0		19.62	19.34	19.70				



Report No. : FG8N0616-05F

LTE Band 48 Maximum Average Power [dBm]								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest		
10	1	0		22.21	21.98	22.29		
10	1	25		22.32	22.04	22.38		
10	1	49		22.28	21.99	22.38		
10	25	0	QPSK	21.31	21.09	21.40		
10	25	12		21.39	21.13	21.47		
10	25	25		21.40	21.13	21.51		
10	50	0		21.39	21.08	21.47		
10	1	0		21.37	21.12	21.42		
10	1	25		21.37	21.18	21.54		
10	1	49		21.40	21.08	21.44		
10	25	0	16-QAM	20.33	20.11	20.43		
10	25	12		20.44	20.17	20.52		
10	25	25		20.41	20.14	20.51		
10	50	0		20.43	20.17	20.53		
10	1	0		19.94	19.75	20.06		
10	1	25		20.03	19.82	20.18		
10	1	49		19.99	19.73	20.09		
10	25	0	64-QAM	19.43	19.18	19.50		
10	25	12		19.51	19.22	19.57		
10	25	25		19.51	19.13	19.61		
10	50	0		19.44	19.17	19.51		
5	1	0		22.20	22.02	22.32		
5	1	12		22.28	22.06	22.38		
5	1	24	QPSK	22.25	22.01	22.38		
5	12	0		21.35	21.13	21.46		
5	12	7		21.38	21.17	21.52		
5	12	13		21.38	21.12	21.50		
5	25	0		21.37	21.12	21.48		
5	1	0		21.31	21.10	21.40		
5	1	12		21.37	21.17	21.55		
5	1	24		21.37	21.14	21.54		
5	12	0	16-QAM	20.32	20.12	20.51		
5	12	7		20.40	20.17	20.54		
5	12	13		20.38	20.14	20.51		
5	25	0		20.40	20.16	20.55		
5	1	0		19.98	19.77	20.09		
5	1	12		20.07	19.84	20.17		
5	1	24	64-QAM	20.04	19.81	20.15		
5	12	0		19.45	19.20	19.56		
5	12	7		19.53	19.28	19.60		
5	12	13		19.50	19.26	19.61		
5	25	0		19.50	19.25	19.60		



Report No. : FG8N0616-05F

	LTE Band 48C_CA Maximum Average Power [dBm]									
	P	CC	S	00						
BW [MHz]	RB Size	RB Offset	RB Size	RB Offset	Mod	Lowest	Middle	Highest		
20+20	1	0	1	0		20.07	19.78	19.58		
20+20	1	99	1	0	QPSK	11.19	10.86	10.71		
20+20	0	0	1	99		21.95	21.71	21.52		
20+20	1	0	1	0		19.10	18.77	18.77		
20+20	1	99	1	0	16-QAM	11.28	10.97	10.77		
20+20	0	0	1	99		21.02	20.82	20.60		
20+20	1	0	1	0		19.08	18.78	18.74		
20+20	1	99	1	0	64-QAM	10.94	10.80	10.42		
20+20	0	0	1	99		18.70	18.41	18.25		
20+15	100	0	75	0		19.97	19.97	19.87		
20+15	1	0	1	74	QPSK	11.39	10.81	11.07		
20+15	1	74	1	0		22.21	21.75	22.14		
20+15	100	0	75	0		19.26	19.01	18.82		
20+15	1	0	1	74	16-QAM	11.53	10.99	11.26		
20+15	1	74	1	0		21.33	20.99	21.33		
20+15	100	0	75	0		19.28	19.02	18.97		
20+15	1	0	1	74	64-QAM	11.18	10.58	10.62		
20+15	1	74	1	0		19.02	18.64	19.01		
15+20	75	0	100	0		19.99	19.97	20.03		
15+20	1	0	1	99	QPSK	11.18	11.23	11.09		
15+20	1	74	1	0		22.23	22.11	22.15		
15+20	75	0	100	0		19.03	19.26	19.04		
15+20	1	0	1	99	16-QAM	11.33	11.42	11.28		
15+20	1	74	1	0		21.43	21.29	21.33		
15+20	75	0	100	0		18.99	19.29	18.98		
15+20	1	0	1	99	64-QAM	10.96	11.03	10.93		
15+20	1	74	1	0		18.79	18.93	19.01		



Report No. : FG8N0616-05F

LTE Band 48C_CA Maximum Average Power [dBm]									
PW (MH-1 PCC SCC									
BW [MHz]	RB Size	RB Offset	RB Size	RB Offset	Mod	Lowest	Middle	Highest	
20+10	100	0	50	0		20.14	19.88	19.91	
20+10	1	0	1	49	QPSK	11.24	10.77	10.79	
20+10	1	99	1	0		22.03	21.77	21.81	
20+10	100	0	50	0		19.18	18.89	18.95	
20+10	1	0	1	49	16-QAM	11.31	10.89	11.04	
20+10	1	99	1	0		21.09	20.88	21.05	
20+10	100	0	50	0		19.19	18.94	18.97	
20+10	1	0	1	49	64-QAM	10.98	10.57	10.54	
20+10	1	99	1	0		18.67	18.78	18.75	
10+20	50	0	100	0		19.97	20.14	19.87	
10+20	1	0	1	99	QPSK	11.27	11.24	11.00	
10+20	1	49	1	0		22.31	22.06	22.21	
10+20	50	0	100	0		19.02	19.33	19.10	
10+20	1	0	1	99	16-QAM	11.41	11.52	11.25	
10+20	1	49	1	0		21.34	21.35	21.28	
10+20	50	0	100	0		18.91	19.19	18.89	
10+20	1	0	1	99	64-QAM	11.03	11.13	11.01	
10+20	1	49	1	0		18.76	18.87	18.92	
20+5	100	0	25	0		20.03	19.86	19.81	
20+5	1	0	1	24	QPSK	11.16	11.23	11.17	
20+5	1	99	1	0		22.21	22.04	22.11	
20+5	100	0	25	0		19.00	19.18	19.07	
20+5	1	0	1	24	16-QAM	11.28	11.45	11.22	
20+5	1	99	1	0		21.53	21.28	21.34	
20+5	100	0	25	0		19.03	19.39	19.03	
20+5	1	0	1	24	64-QAM	11.06	11.11	10.84	
20+5	1	99	1	0		18.82	18.83	19.04	
5+20	25	0	100	0		19.97	19.84	20.11	
5+20	1	0	1	99	QPSK	11.21	11.21	11.13	
5+20	1	24	1	0		22.23	22.13	22.18	
5+20	25	0	100	0		19.11	19.30	19.10	
5+20	1	0	1	99	16-QAM	11.28	11.45	11.36	
5+20	1	24	1	0		21.52	21.25	21.30	
5+20	25	0	100	0		18.93	19.20	19.04	
5+20	1	0	1	99	64-QAM	10.98	11.12	10.90	
5+20	1	24	1	0		18.81	18.88	18.92	




LTE Band 48


Peak-to-Average Ratio

Mode					
Mod.	QP	SK	160	Limit: 13dB	
RB Size	1RB	Full RB	1RB	Full RB	Result
Lowest CH	3.68	5.19	4.29	6.09	
Middle CH	3.68	5.25	4.52	6.14	PASS
Highest CH	3.51	5.19	4.26	6.09	
Mode					
Mod.	640	AM		Limit: 13dB	
RB Size	1RB	Full RB			Result
Lowest CH	5.51	6.64	-	-	
Middle CH	5.16	6.70	-	-	PASS
Highest CH	5.45	6.67	-	-	




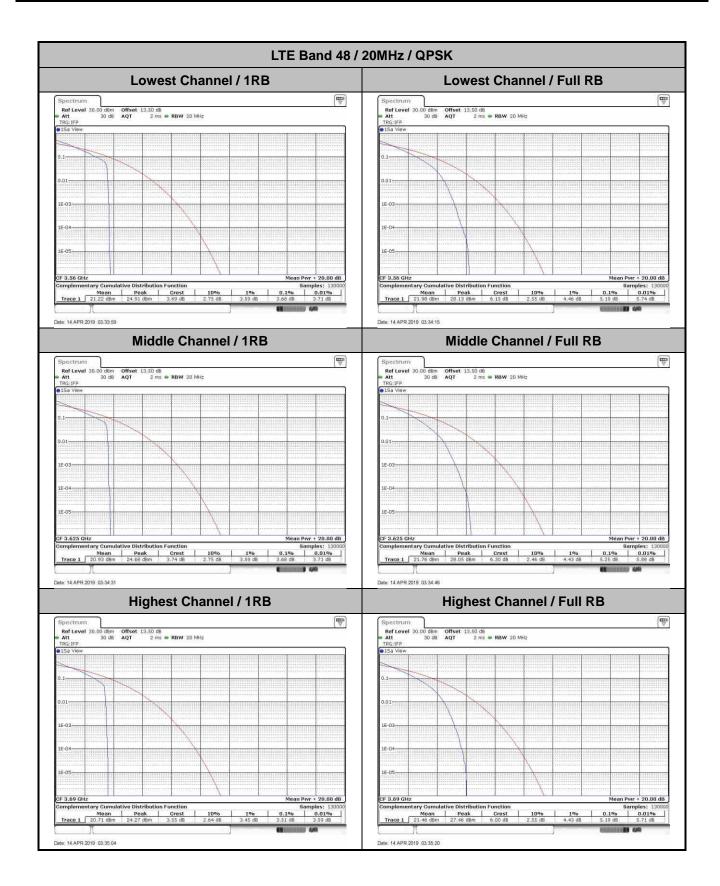



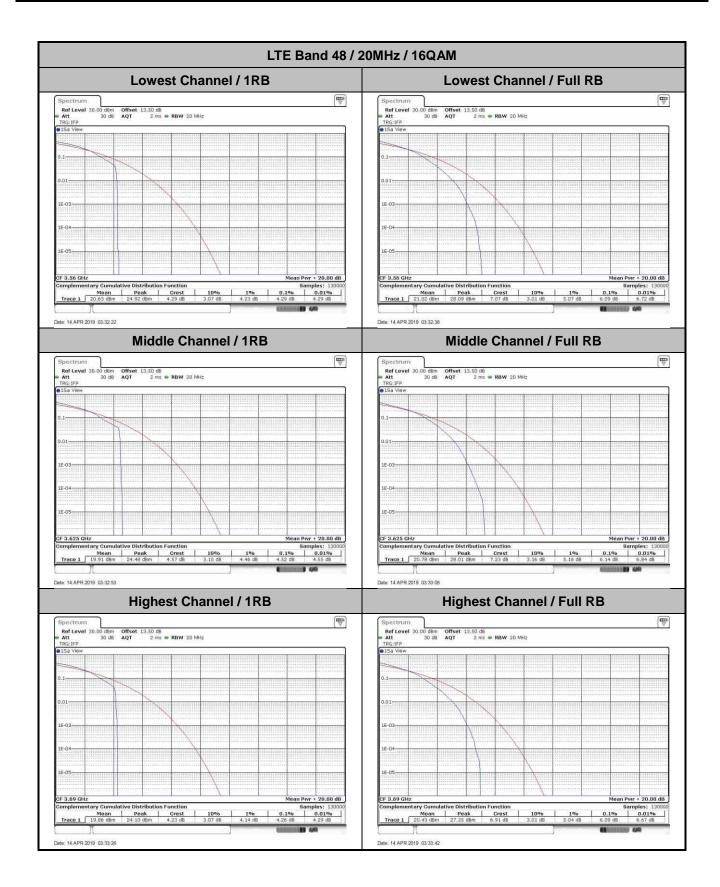



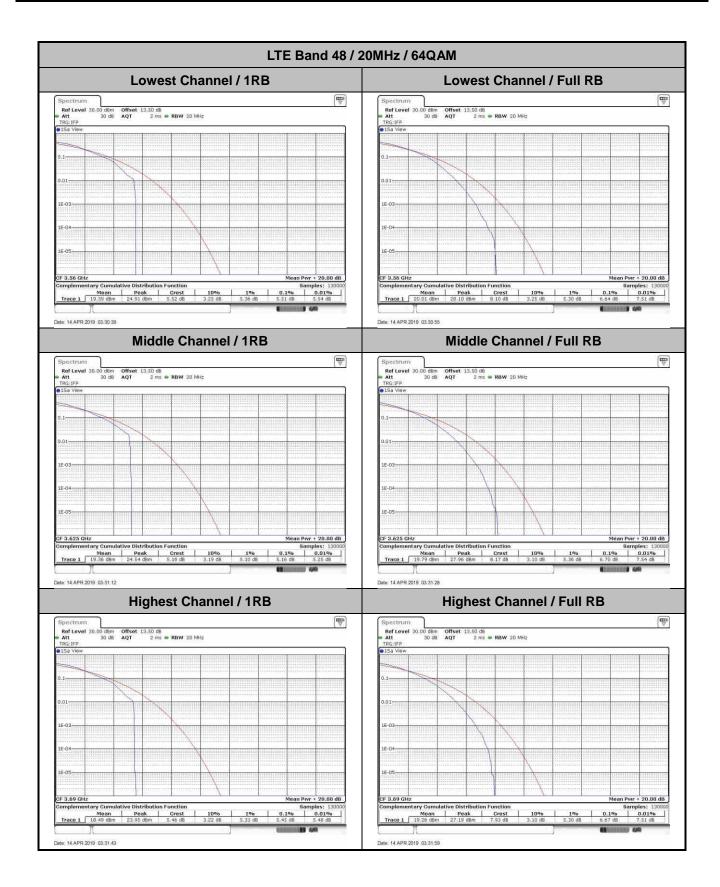





26dB Bandwidth

Mode	LTE Band 48 : 26dB BW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	-	-	-	-	4.98	4.98	9.69	9.67	14.12	14.42	18.86	19.06
Middle CH	-	-	-	-	4.95	4.73	9.77	9.67	14.15	14.24	18.90	19.54
Highest CH	-	-	-	-	4.88	4.85	9.75	9.81	14.24	14.24	18.70	18.66
Mode	LTE Band 48 : 26dB BW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		10MHz	
Mod.	64QAM		64QAM		64QAM		64QAM		64QAM		64QAM	
Lowest CH	-	-	-	-	4.85	-	9.67	-	14.66	-	18.82	-
Middle CH	-	-	-	-	4.88	-	9.59	-	14.21	-	18.94	-
Highest CH	-	-	-	-	4.73	-	9.73	-	14.37	-	18.70	-




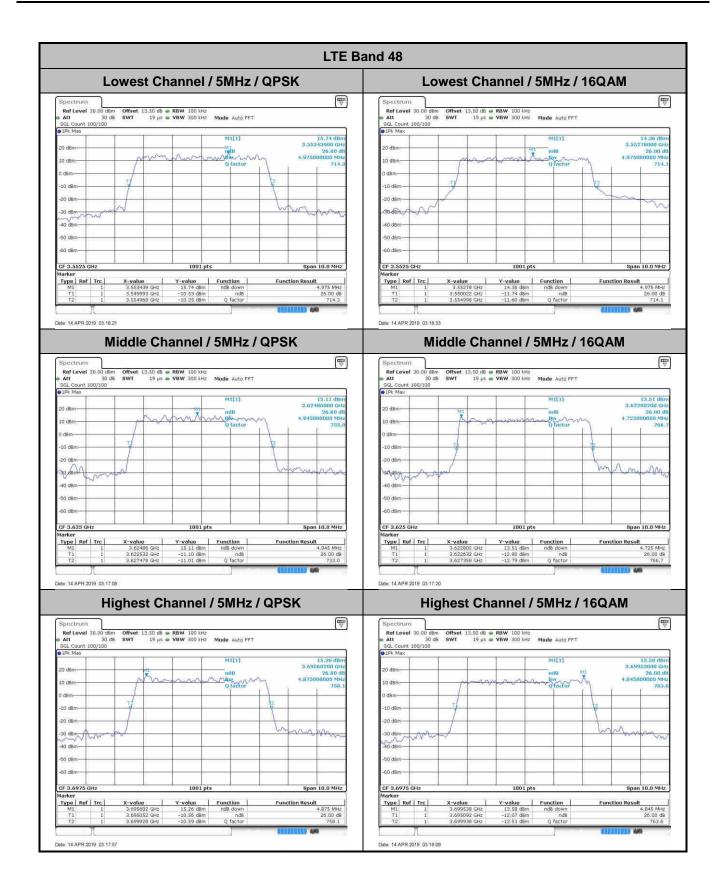




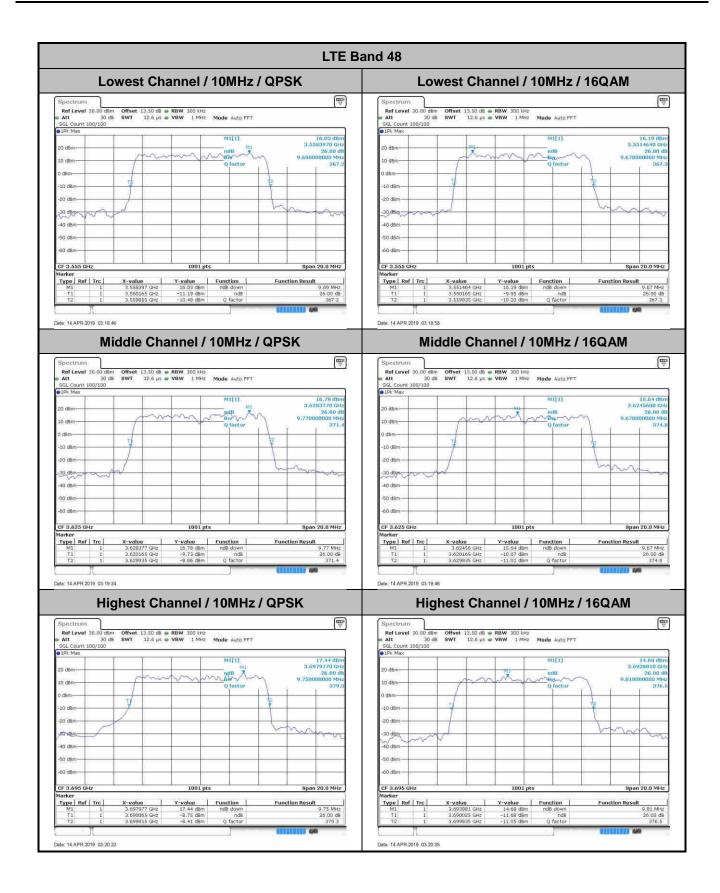




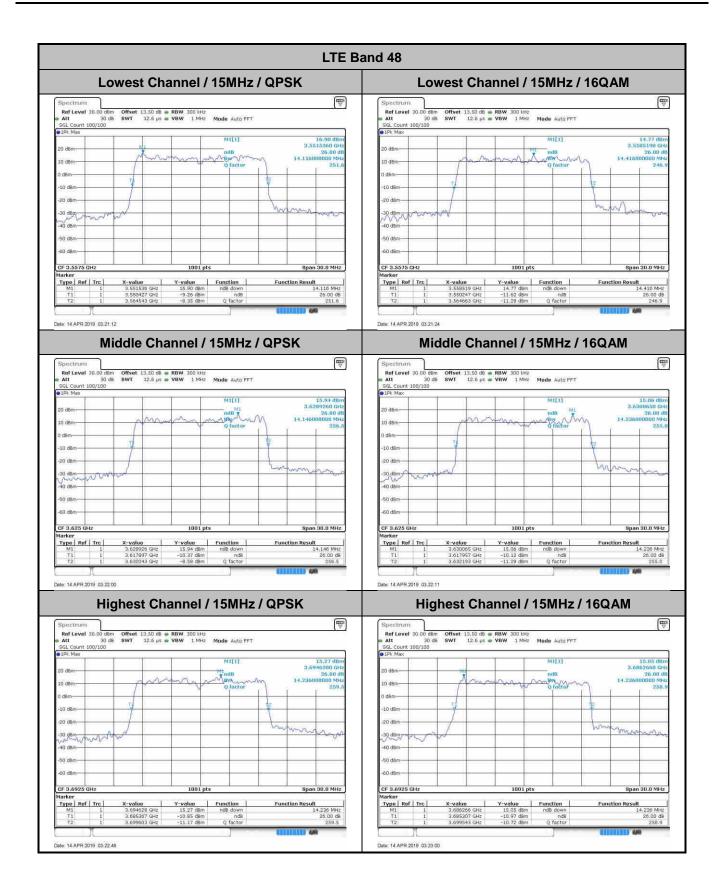




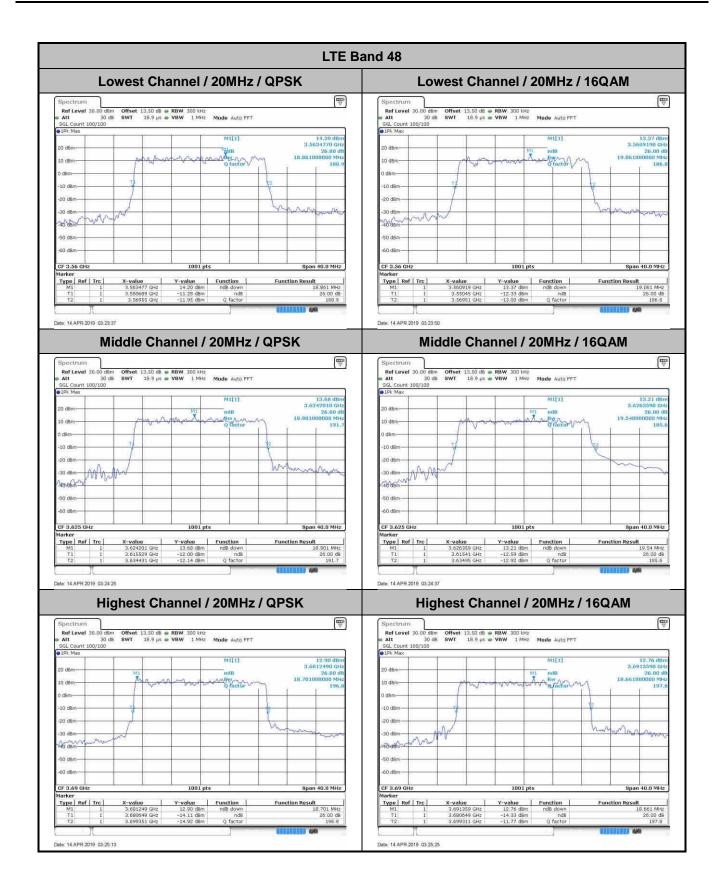



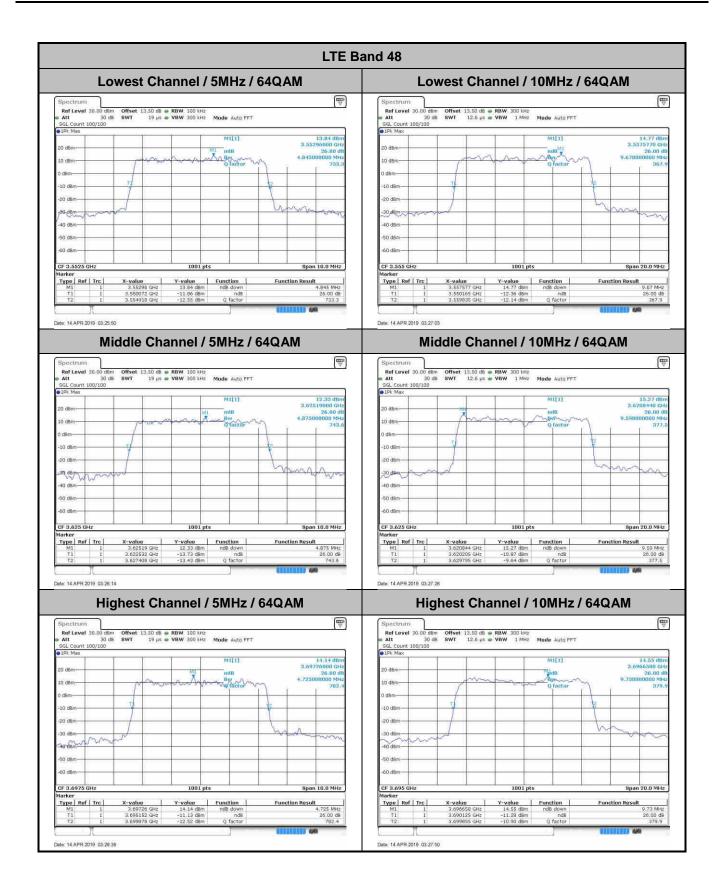



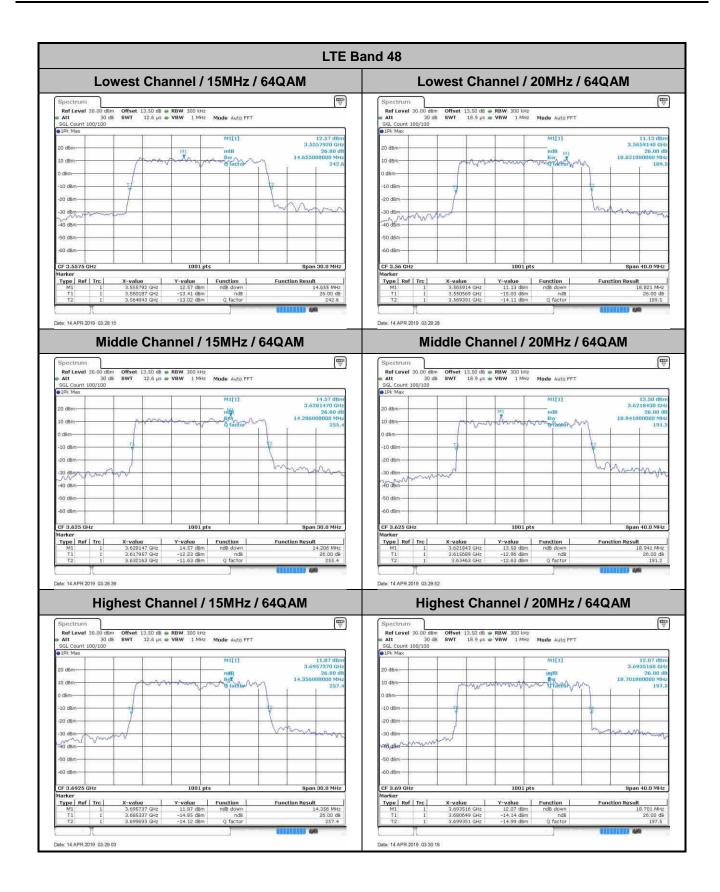





Occupied Bandwidth

Mode	LTE Band 48 : 99%OBW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	-	-	-	-	4.50	4.50	8.99	9.09	13.46	13.43	17.82	17.94
Middle CH	-	-	-	-	4.49	4.49	9.03	9.07	13.49	13.46	17.94	17.86
Highest CH	-	-	-	-	4.50	4.49	9.07	9.01	13.46	13.40	17.98	17.98
Mode	LTE Band 48 : 99%OBW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		10MHz	
Mod.	64QAM		64QAM		64QAM		64QAM		64QAM		64QAM	
Lowest CH	-	-	-	-	4.52	-	9.05	-	13.49	-	17.90	-
Middle CH	-	-	-	-	4.51	-	9.09	-	13.46	-	17.98	-
Highest CH	-	-	-	-	4.51	-	8.99	-	13.37	-	17.94	-




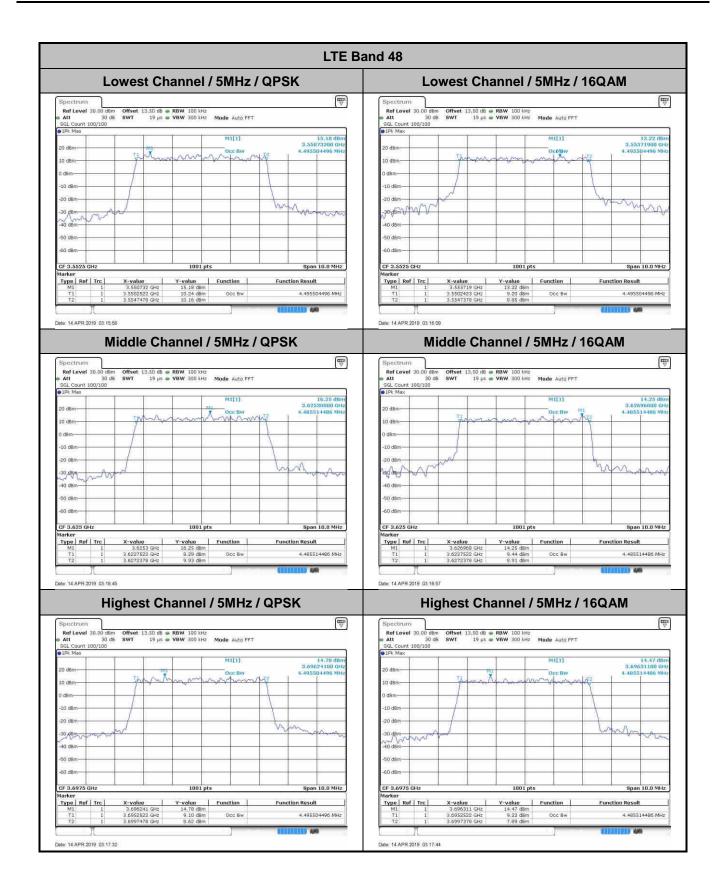




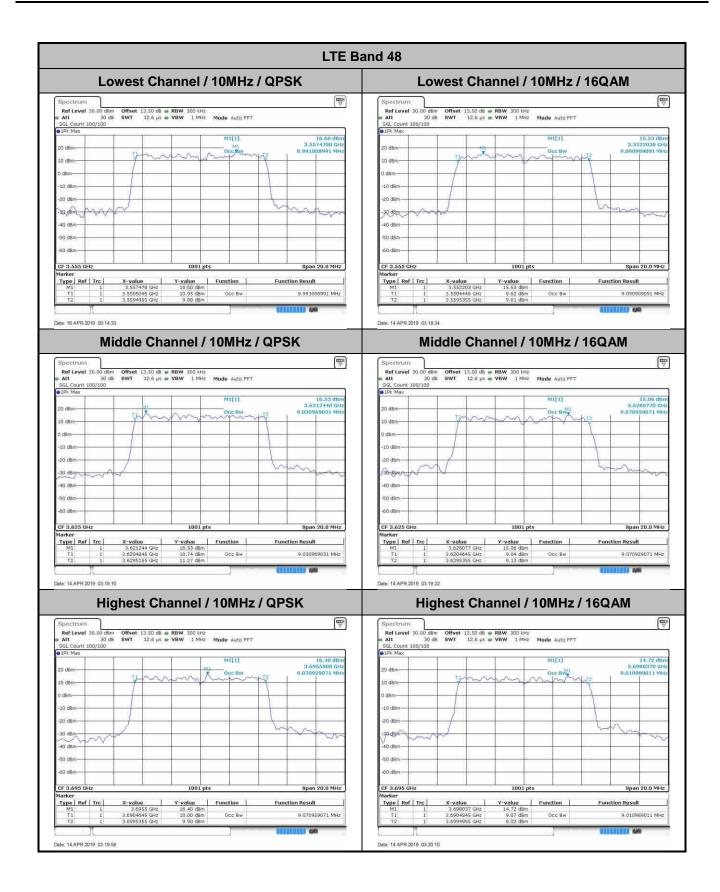




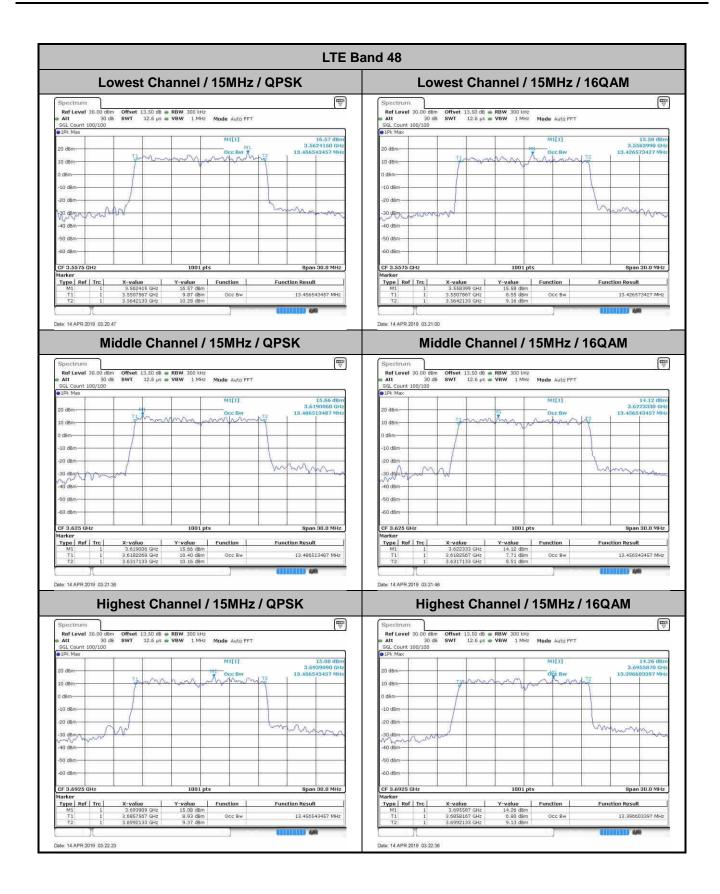




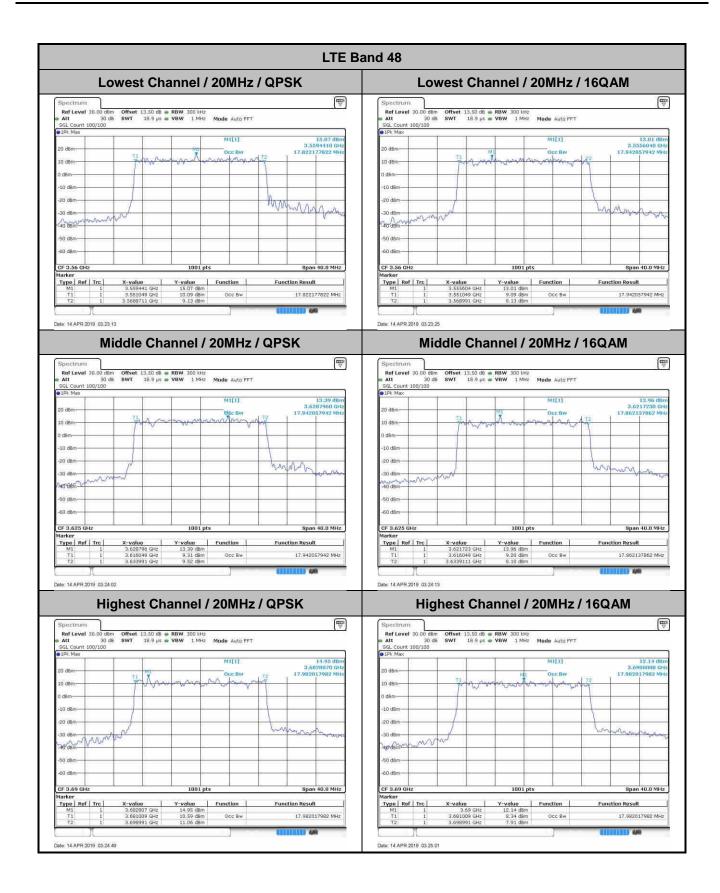



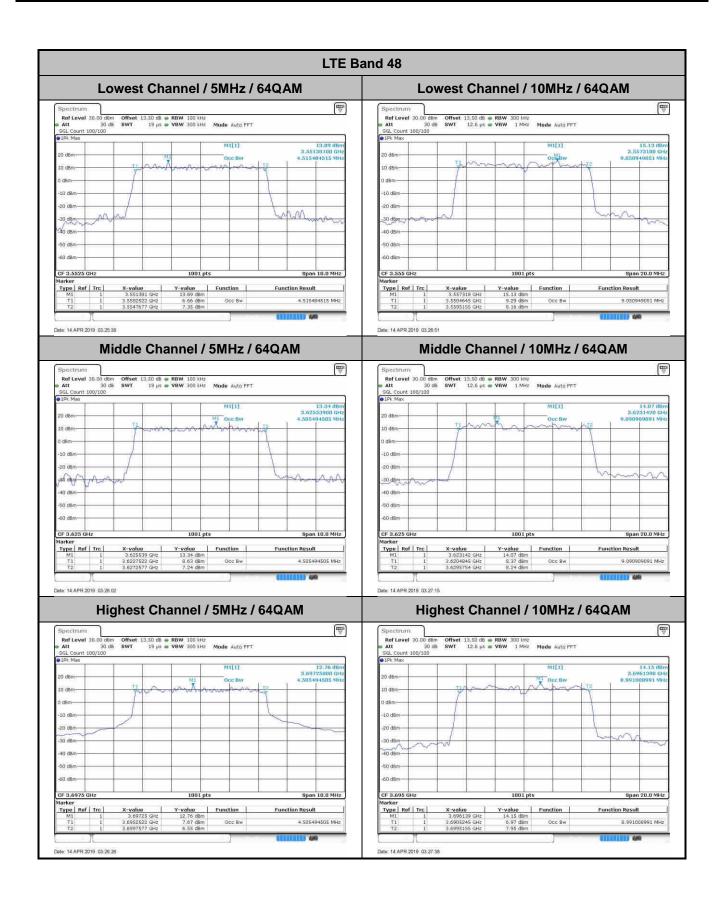



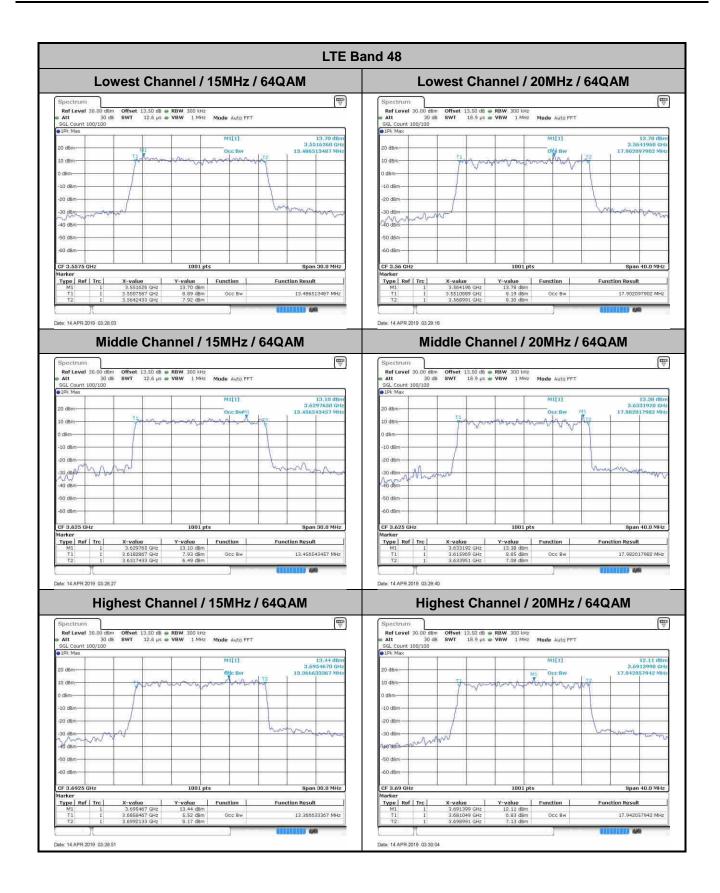



Conducted Band Edge

