



FCC RADIO TEST REPORT

FCC ID : A4RG020PQ
Equipment : Phone
Model Name : G020P, G020Q
Applicant : Google LLC
1600 Amphitheatre Parkway,
Mountain View, California, 94043 USA
Standard : FCC Part 15 Subpart E §15.407

The product was received on Nov. 07, 2018 and testing was started from Jun. 19, 2019 and completed on Jun. 21, 2019. We, SPORTON INTERNATIONAL INC., EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this variant report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Approved by: Jones Tsai

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Product Specification of Equipment Under Test.....	6
1.3 Modification of EUT	7
1.4 Testing Location	8
1.5 Applicable Standards.....	8
2 Test Configuration of Equipment Under Test	9
2.1 Carrier Frequency and Channel	9
2.2 Test Mode.....	10
2.3 Connection Diagram of Test System.....	10
2.4 EUT Operation Test Setup	10
3 Test Result	11
3.1 Maximum Conducted Output Power Measurement	11
3.2 Unwanted Emissions Measurement.....	13
3.3 Antenna Requirements	18
4 List of Measuring Equipment.....	19
5 Uncertainty of Evaluation	20
Appendix A. Conducted Test Results	
Appendix B. Radiated Spurious Emission	
Appendix C. Radiated Spurious Emission Plots	
Appendix D. Duty Cycle Plots	



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
-	15.403(i)	26dB Bandwidth	Not Required	-
-	2.1049	99% Occupied Bandwidth	Not Required	-
3.1	15.407(a)	Maximum Conducted Output Power	Pass	-
-	15.407(a)	Power Spectral Density	Not Required	-
3.2	15.407(b)	Unwanted Emissions	Pass	Under limit 2.28 dB at 5150.000 MHz
-	15.207	AC Conducted Emission	Not Required	-
-	15.407(c)	Automatically Discontinue Transmission	Not Required	-
3.3	15.203 15.407(a)	Antenna Requirement	Pass	-
Remark:				
1. Not required means after assessing, test items are not necessary to carry out.				
2. This is a variant report. All the test cases were performed on original report which can be referred to Sporton Report Number FR8N0620-05E.				

Declaration of Conformity:
The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.
Comments and Explanations:
The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Reviewed by: Wii Chang
Report Producer: Aileen Huang



1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
Equipment	Phone
Model Name	G020P, G020Q
FCC ID	A4RG020PQ
EUT supports Radios application	GSM/EGPRS/WCDMA/HSPA/LTE/NFC/GNSS/WPC WLAN 11b/g/n HT20 WLAN 11a/n HT20/HT40 WLAN 11ac VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE 60 GHz Low Power Transmitter
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer.

EUT Information List	
No.	S/N
#1	94NBA009VT
#2	958BA00AL3



1.2 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	5180 MHz ~ 5240 MHz 5260 MHz ~ 5320 MHz 5500 MHz ~ 5720 MHz
Maximum Output Power to Antenna	<p><Ant. 4></p> <p><5180 MHz ~ 5240 MHz> 802.11a : 18.00 dBm / 0.0631 W 802.11n HT20 : 18.30 dBm / 0.0676 W 802.11n HT40 : 18.90 dBm / 0.0776 W 802.11 ac VHT20: 18.20 dBm / 0.0661 W 802.11 ac VHT40: 18.80 dBm / 0.0759 W 802.11 ac VHT80: 13.60 dBm / 0.0229 W</p> <p><5260 MHz ~ 5320 MHz> 802.11a : 18.10 dBm / 0.0646 W 802.11n HT20 : 18.40 dBm / 0.0692 W 802.11n HT40 : 20.30 dBm / 0.1072 W 802.11 ac VHT20: 18.50 dBm / 0.0708 W 802.11 ac VHT40: 20.00 dBm / 0.1000 W 802.11 ac VHT80: 16.20 dBm / 0.0417 W</p> <p><5500 MHz ~ 5720 MHz > 802.11a : 18.20 dBm / 0.0661 W 802.11n HT20 : 18.20 dBm / 0.0661 W 802.11n HT40 : 20.60 dBm / 0.1148 W 802.11 ac VHT20: 18.20 dBm / 0.0661 W 802.11 ac VHT40: 20.30 dBm / 0.1072 W 802.11 ac VHT80: 20.10 dBm / 0.1023 W</p> <p><Ant. 5></p> <p><5180 MHz ~ 5240 MHz> 802.11a : 18.40 dBm / 0.0692 W 802.11n HT20 : 18.70 dBm / 0.0741 W 802.11n HT40 : 19.20 dBm / 0.0832 W 802.11 ac VHT20: 18.60 dBm / 0.0724 W 802.11 ac VHT40: 19.20 dBm / 0.0832 W 802.11 ac VHT80: 14.10 dBm / 0.0257 W</p> <p><5260 MHz ~ 5320 MHz> 802.11a : 18.40 dBm / 0.0692 W 802.11n HT20 : 18.40 dBm / 0.0692 W 802.11n HT40 : 20.50 dBm / 0.1122 W 802.11 ac VHT20: 18.40 dBm / 0.0692 W 802.11 ac VHT40: 20.10 dBm / 0.1023 W 802.11 ac VHT80: 16.40 dBm / 0.0437 W</p> <p><5500 MHz ~ 5700 MHz > 802.11a : 18.20 dBm / 0.0661 W 802.11n HT20 : 18.50 dBm / 0.0708 W 802.11n HT40 : 20.40 dBm / 0.1096 W 802.11 ac VHT20: 18.50 dBm / 0.0708 W 802.11 ac VHT40: 20.30 dBm / 0.1072 W 802.11 ac VHT80: 20.60 dBm / 0.1148 W</p>



Standards-related Product Specification										
Maximum Output Power to Antenna	<p>MIMO <Ant. 4+5> <5180 MHz ~ 5240 MHz> 802.11a : 21.46 dBm / 0.1400 W 802.11n HT20 : 21.76 dBm / 0.1500 W 802.11n HT40 : 22.56 dBm / 0.1803 W 802.11 ac VHT20: 21.66 dBm / 0.1466 W 802.11 ac VHT40: 22.56 dBm / 0.1803 W 802.11 ac VHT80: 17.27 dBm / 0.0533 W <5260 MHz ~ 5320 MHz> 802.11a : 21.51 dBm / 0.1416 W 802.11n HT20 : 21.51 dBm / 0.1416 W 802.11n HT40 : 23.51 dBm / 0.2244 W 802.11 ac VHT20: 21.56 dBm / 0.1432 W 802.11 ac VHT40: 23.16 dBm / 0.2070 W 802.11 ac VHT80: 19.61 dBm / 0.0914 W <5500 MHz ~ 5700 MHz > 802.11a : 21.47 dBm / 0.1403 W 802.11n HT20 : 21.31 dBm / 0.1352 W 802.11n HT40 : 23.66 dBm / 0.2323 W 802.11 ac VHT20: 21.26 dBm / 0.1337 W 802.11 ac VHT40: 23.56 dBm / 0.2270 W 802.11 ac VHT80: 23.61 dBm / 0.2296 W</p>									
Antenna Gain / Gain	<p><5150 MHz ~ 5250 MHz> <Ant. 4> : IFA Antenna with gain -7.1 dBi <Ant. 5> : ILA Antenna with gain -1.5 dBi <5250 MHz ~ 5350 MHz> <Ant. 4> : IFA Antenna with gain -7.1 dBi <Ant. 5> : ILA Antenna with gain -1.5 dBi <5470 MHz ~ 5725 MHz> <Ant. 4> : IFA Antenna with gain 0.0 dBi <Ant. 5> : ILA Antenna with gain -0.5 dBi</p>									
Type of Modulation	802.11a/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ac: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)									
Antenna Function Description	<table border="1"> <thead> <tr> <th></th> <th>Ant. 4</th> <th>Ant. 5</th> </tr> </thead> <tbody> <tr> <td>802.11 a/n/ac</td> <td>V</td> <td>V</td> </tr> <tr> <td>802.11 a/n/ac MIMO</td> <td>V</td> <td>V</td> </tr> </tbody> </table>		Ant. 4	Ant. 5	802.11 a/n/ac	V	V	802.11 a/n/ac MIMO	V	V
	Ant. 4	Ant. 5								
802.11 a/n/ac	V	V								
802.11 a/n/ac MIMO	V	V								

Remark: MIMO Ant. 4+5 is a calculated result from sum of the power MIMO Ant. 4 and MIMO Ant. 5.

1.3 Modification of EUT

No modifications are made to the EUT during all test items.



1.4 Testing Location

Test Site	SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978
Test Site No.	Sporton Site No.
	TH05-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

Test Site	SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sporton Site No.
	03CH13-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW1190 and TW0007

1.5 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01.
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ♦ ANSI C63.10-2013

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.



2 Test Configuration of Equipment Under Test

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5150-5250 MHz Band 1 (U-NII-1)	36	5180	44	5220
	38*	5190	46*	5230
	40	5200	48	5240
	42 [#]	5210		

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5250-5350 MHz Band 2 (U-NII-2A)	52	5260	60	5300
	54*	5270	62*	5310
	56	5280	64	5320
	58 [#]	5290		

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5470-5725 MHz Band 3 (U-NII-2C)	100	5500	112	5560
	102*	5510	116	5580
	104	5520	132	5660
	106 [#]	5530	134*	5670
	108	5540	136	5680
	110*	5550	140	5700

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
TDWR Channel	118*	5590	124	5620
	120	5600	126*	5630
	122 [#]	5610	128	5640

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
Straddle Channel	138 [#]	5690	144	5720
	142*	5710		

Note:

1. The above Frequency and Channel in "*" were 802.11n HT40 and 802.11ac VHT40.
2. The above Frequency and Channel in "[#]" were 802.11ac VHT80.

2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.


MIMO Mode

Modulation	Data Rate
802.11n HT40	MCS0
802.11ac VHT80	MCS0

Remark: For Radiated Test Cases, the tests were performed with Adapter 1.

Ch. #		Band I : 5150-5250 MHz	Band II : 5250-5350 MHz	Band III : 5470-5725MHz
		802.11n HT40	802.11n HT40	802.11ac VHT80
L	Low	38	-	106
M	Middle	-	-	-
H	High	-	62	-

2.3 Connection Diagram of Test System

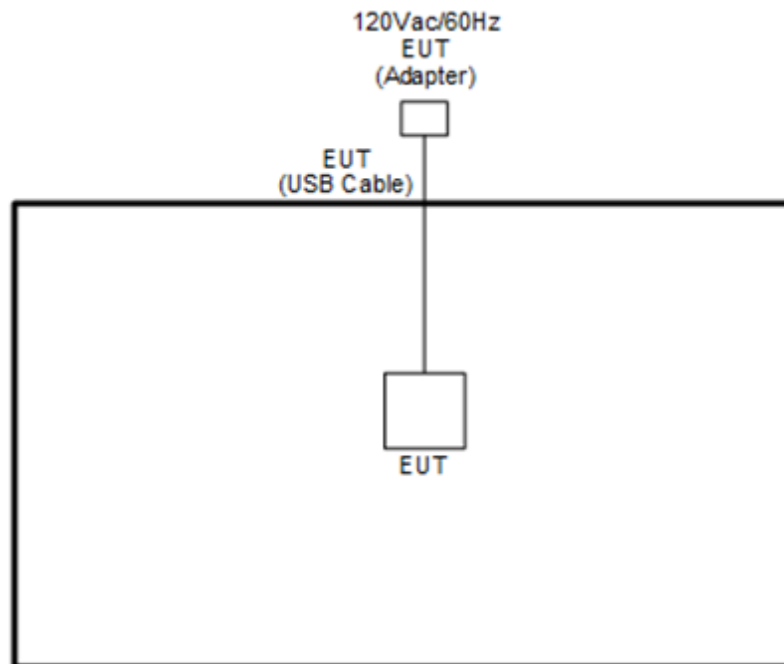

2.4 EUT Operation Test Setup

The RF test items, utility "QRCT 3.0.271.0" was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.



3 Test Result

3.1 Maximum Conducted Output Power Measurement

3.1.1 Limit of Maximum Conducted Output Power

<FCC 14-30 CFR 15.407>

For the 5.15–5.25 GHz bands:

- For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW. For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

For the 5.25–5.725 GHz bands:

- The maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz.

For Straddle Channel, according to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, if the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Note that U-NII-2 band, devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

3.1.2 Measuring Instruments

See list of measuring equipment of this test report.

3.1.3 Test Procedures


The testing follows Method PM-G of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM-G (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit at its maximum power control level.
3. Measure the average power of the transmitter
4. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

For Straddle Channel, according to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, if the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

3.1.4 Test Setup

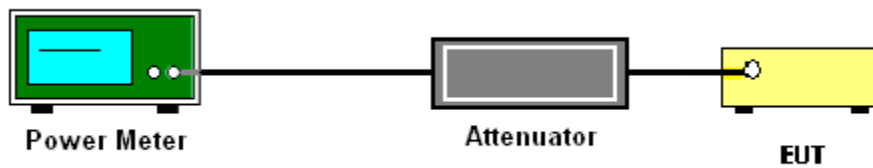

3.1.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.



3.2 Unwanted Emissions Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

3.2.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5150-5250 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27dBm/MHz.

For transmitters operating in the 5250-5350 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27 dBm/MHz. Devices operating in the 5250-5350 MHz band that generate emissions in the 5150-5250 MHz band must meet all applicable technical requirements for operation in the 5150-5250 MHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5150-5250 MHz band.

For transmitters operating in the 5470-5600 MHz and 5650-5725MHz band: all emissions outside of the 5470-5600 MHz and 5650-5725MHz band shall not exceed an EIRP of -27 dBm/MHz.

- (2) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

Note: The following formula is used to convert the EIRP to field strength.

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$

EIRP (dBm)	Field Strength at 3m (dBμV/m)
- 27	68.3



- (3) KDB789033 D02 v02r01 G)2)c)
 - (i) Section 15.407(b)(1) to (b)(3) specify the unwanted emission limits for the U-NII-1 and U-NII-2 bands. As specified, emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit of -27 dBm/MHz.³
 - (ii) Section 15.407(b)(4) specifies the unwanted emission limit for the U-NII-3 band. A band emissions mask is specified in Section 15.407(b)(4)(i). The emission limits are in terms of a Peak detector. An alternative to the band emissions mask is specified in Section 15.407(b)(4)(ii). The alternative limits are based on the highest antenna gain specified in the filing. There are also marketing and importation restrictions for the devices using the alternative limit.⁴

Note 3: An out-of-band emission that complies with both the average and peak limits of Section 15.209 is not required to satisfy the -27 dBm/MHz peak emission limit.

Note 4: Only devices with antenna gains of 10 dBi or less may be approved using the emission limits specified in Section 15.247(d) till March 2, 2018; all other devices operating in this band must use the mask specified in Section 15.407(b)(4)(i).

3.2.2 Measuring Instruments

See list of measuring equipment of this test report.


3.2.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section G) Unwanted emissions measurement.
 - (1) Procedure for Unwanted Emissions Measurements Below 1000MHz
 - RBW = 120 kHz
 - VBW = 300 kHz
 - Detector = Peak
 - Trace mode = max hold
 - (2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
 - RBW = 1 MHz
 - VBW ≥ 3 MHz
 - Detector = Peak
 - Sweep time = auto
 - Trace mode = max hold
 - (3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz
 - RBW = 1 MHz
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - $VBW \geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.


2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.2.4 Test Setup


For radiated emissions below 30MHz

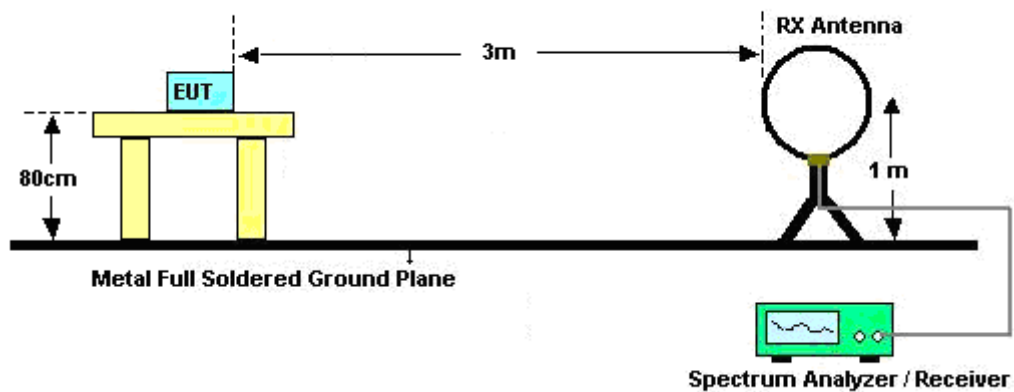

For radiated emissions from 30MHz to 1GHz

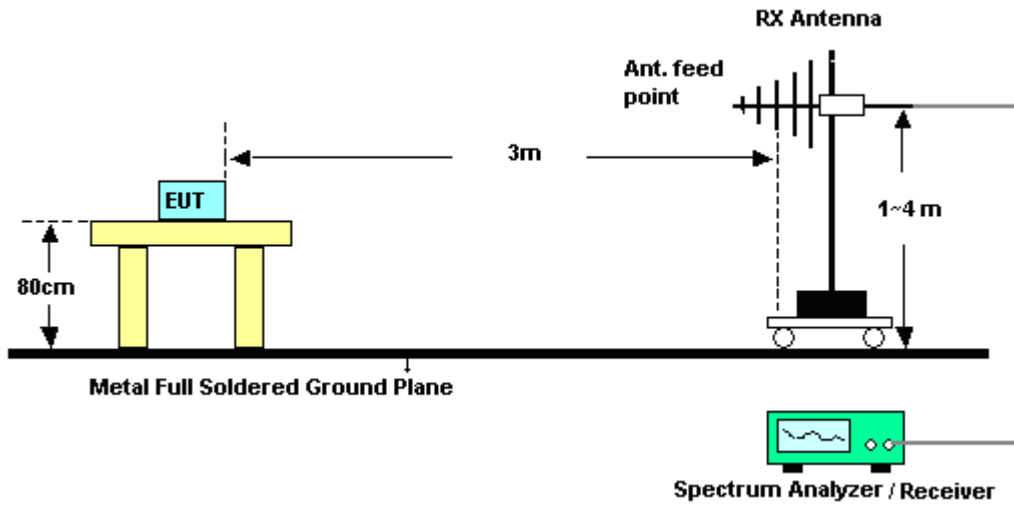

For radiated emissions above 1GHz

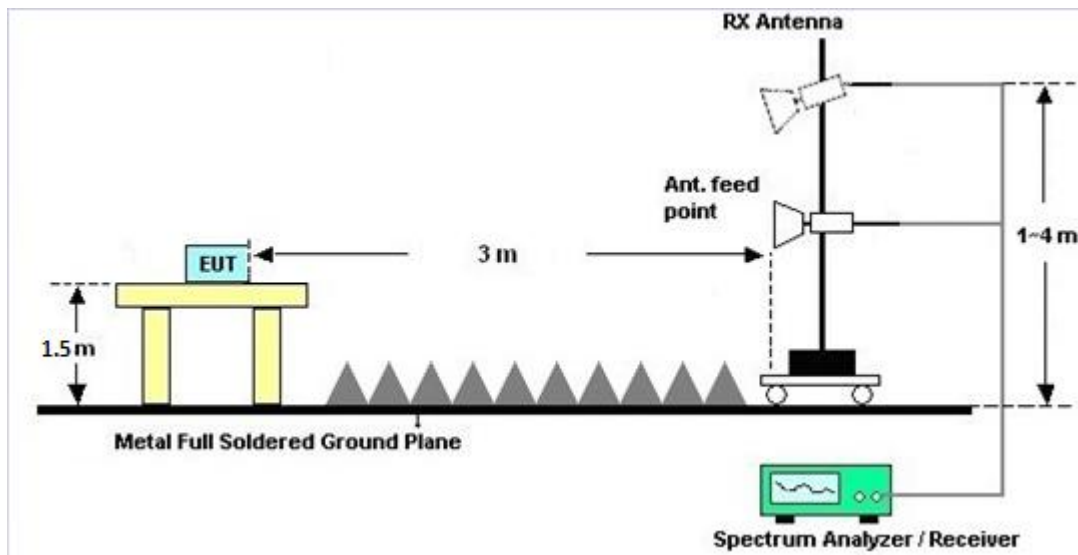



3.2.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.

3.2.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix B and C.

3.2.7 Duty Cycle

Please refer to Appendix D.

3.2.8 Test Result of Radiated Spurious Emissions (30MHz ~ 10th Harmonic)

Please refer to Appendix B and C.



3.3 Antenna Requirements

3.3.1 Standard Applicable

If transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.3.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Jan. 07, 2019	Jun. 19, 2019~ Jun. 21, 2019	Jan. 06, 2020	Radiation (03CH13-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-124 1	1GHz ~ 18GHz	Jun. 29, 2018	Jun. 19, 2019~ Jun. 21, 2019	Jun. 28, 2019	Radiation (03CH13-HY)
Bilog Antenna	TESEQ	CBL 6111D&00800 N1D01N-06	37059&01	30MHz~1GHz	Oct. 13, 2018	Jun. 19, 2019~ Jun. 21, 2019	Oct. 12, 2019	Radiation (03CH13-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170 584	18GHz- 40GHz	Dec. 05, 2018	Jun. 19, 2019~ Jun. 21, 2019	Dec. 04, 2019	Radiation (03CH13-HY)
Preamplifier	Keysight	83017A	MY532700 80	1GHz~26.5GHz	Nov. 14, 2018	Jun. 19, 2019~ Jun. 21, 2019	Nov. 13, 2020	Radiation (03CH13-HY)
Preamplifier	MITEQ	AMF-7D-0010 1800-30-10P	1590074	1GHz~18GHz	May 20, 2019	Jun. 19, 2019~ Jun. 21, 2019	May 19, 2020	Radiation (03CH13-HY)
Amplifier	Sonoma-Instrument	310 N	187282	9KHz~1GHz	Dec. 18, 2018	Jun. 19, 2019~ Jun. 21, 2019	Dec. 17, 2019	Radiation (03CH13-HY)
Amplifier	MITEQ	TTA1840-35- HG	1871923	18GHz~40GHz, VSWR : 2.5:1 max	Jul. 16, 2018	Jun. 19, 2019~ Jun. 21, 2019	Jul. 15, 2019	Radiation (03CH13-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 126E	0030/126E	30M-18G	Feb. 13, 2019	Jun. 19, 2019~ Jun. 21, 2019	Feb. 12, 2020	Radiation (03CH13-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	804793/4	30M-18G	Feb. 13, 2019	Jun. 19, 2019~ Jun. 21, 2019	Feb. 12, 2020	Radiation (03CH13-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY24961/ 4	30M-18G	Feb. 13, 2019	Jun. 19, 2019~ Jun. 21, 2019	Feb. 12, 2020	Radiation (03CH13-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	MY2859/2	30M~40GHz	Mar. 13, 2019	Jun. 19, 2019~ Jun. 21, 2019	Mar. 12, 2020	Radiation (03CH13-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	MY4274/2	30M~40GHz	Mar. 13, 2019	Jun. 19, 2019~ Jun. 21, 2019	Mar. 12, 2020	Radiation (03CH13-HY)
Spectrum Analyzer	Keysight	N9010A	MY553705 26	10Hz~44GHz	Mar. 19, 2019	Jun. 19, 2019~ Jun. 21, 2019	Mar. 18, 2020	Radiation (03CH13-HY)
Antenna Mast	EMEC	AM-BS-4500- B	N/A	1m~4m	N/A	Jun. 19, 2019~ Jun. 21, 2019	N/A	Radiation (03CH13-HY)
Turn Table	EMEC	TT2000	N/A	0~360 Degree	N/A	Jun. 19, 2019~ Jun. 21, 2019	N/A	Radiation (03CH13-HY)
Software	AUDIX	E3 6.2009-8-24c	RK-001124	N/A	N/A	Jun. 19, 2019~ Jun. 21, 2019	N/A	Radiation (03CH13-HY)
EMI Test Receiver	Keysight	N9038A (MXE)	MY541300 85	20Hz ~ 8.4GHz	Nov. 01, 2018	Jun. 19, 2019~ Jun. 21, 2019	Oct. 31, 2019	Radiation (03CH13-HY)
Filter	Wainwright	WHKX12-108 0-1200-15000 -60ST	SN3	1.2G Low Pass	Jul. 05, 2018	Jun. 19, 2019~ Jun. 21, 2019	Jul. 04, 2019	Radiation (03CH13-HY)
Filter	Woken	WHKX8-5272. 5-6750-18000 -40ST	SN5	6.75G Highpass	Mar.13, 2019	Jun. 19, 2019~ Jun. 21, 2019	Mar. 12, 2020	Radiation (03CH13-HY)
Power Sensor	DARE	RPR3006W	13I00030S NO32	9kHz~6GHz	Dec. 03, 2018	Jun. 20, 2019~ Jun. 21, 2019	Dec. 02, 2019	Conducted (TH05-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP40	100057	9kHz-40GHz	Nov. 21, 2018	Jun. 20, 2019~ Jun. 21, 2019	Nov. 20, 2019	Conducted (TH05-HY)
Switch Box & RF Cable	Burgeon	ETF-058	EC120838 2	N/A	Mar. 27, 2019	Jun. 20, 2019~ Jun. 21, 2019	Mar. 26, 2020	Conducted (TH05-HY)



5 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.9
---	-----

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.4
---	-----

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.3
---	-----

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Nick Yu	Temperature:	21~25	°C
Test Date:	2019/6/20 ~ 2019/6/21	Relative Humidity:	51~54	%
TX Tool		TX Tool Version		

TEST RESULTS DATA
Average Power Table

FCC Band I												
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail
					Ant 4	Ant 5	SUM	Ant 4	Ant 5	Ant 4	Ant 5	
11a	6Mbps	1	36	5180	17.90	18.10		24.00	24.00	-7.10	-1.50	Pass
11a	6Mbps	1	44	5220	18.00	18.40		24.00	24.00	-7.10	-1.50	Pass
11a	6Mbps	1	48	5240	18.00	18.30		24.00	24.00	-7.10	-1.50	Pass
HT20	MCS0	1	36	5180	18.30	18.50		24.00	24.00	-7.10	-1.50	Pass
HT20	MCS0	1	44	5220	18.00	18.30		24.00	24.00	-7.10	-1.50	Pass
HT20	MCS0	1	48	5240	18.30	18.70		24.00	24.00	-7.10	-1.50	Pass
HT40	MCS0	1	38	5190	14.90	14.70		24.00	24.00	-7.10	-1.50	Pass
HT40	MCS0	1	46	5230	18.90	19.20		24.00	24.00	-7.10	-1.50	Pass
VHT20	MCS0	1	36	5180	18.20	18.50		24.00	24.00	-7.10	-1.50	Pass
VHT20	MCS0	1	44	5220	17.90	18.20		24.00	24.00	-7.10	-1.50	Pass
VHT20	MCS0	1	48	5240	18.20	18.60		24.00	24.00	-7.10	-1.50	Pass
VHT40	MCS0	1	38	5190	14.80	14.60		24.00	24.00	-7.10	-1.50	Pass
VHT40	MCS0	1	46	5230	18.80	19.20		24.00	24.00	-7.10	-1.50	Pass
VHT80	MCS0	1	42	5210	13.60	14.10		24.00	24.00	-7.10	-1.50	Pass
11a	6Mbps	2	36	5180	18.10	18.30	21.21	24.00		-1.50		Pass
11a	6Mbps	2	44	5220	18.30	18.60	21.46	24.00		-1.50		Pass
11a	6Mbps	2	48	5240	18.30	18.60	21.46	24.00		-1.50		Pass
HT20	MCS0	2	36	5180	18.50	18.70	21.61	24.00		-1.50		Pass
HT20	MCS0	2	44	5220	18.20	18.60	21.41	24.00		-1.50		Pass
HT20	MCS0	2	48	5240	18.60	18.90	21.76	24.00		-1.50		Pass
HT40	MCS0	2	38	5190	14.90	15.30	18.11	24.00		-1.50		Pass
HT40	MCS0	2	46	5230	19.40	19.70	22.56	24.00		-1.50		Pass
VHT20	MCS0	2	36	5180	18.40	18.60	21.51	24.00		-1.50		Pass
VHT20	MCS0	2	44	5220	18.10	18.50	21.31	24.00		-1.50		Pass
VHT20	MCS0	2	48	5240	18.50	18.80	21.66	24.00		-1.50		Pass
VHT40	MCS0	2	38	5190	14.90	15.20	18.06	24.00		-1.50		Pass
VHT40	MCS0	2	46	5230	19.40	19.70	22.56	24.00		-1.50		Pass
VHT80	MCS0	2	42	5210	13.90	14.60	17.27	24.00		-1.50		Pass

TEST RESULTS DATA
Average Power Table

FCC Band II													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
					Ant 4	Ant 5	SUM	Ant 4	Ant 5	Ant 4	Ant 5		
11a	6Mbps	1	52	5260	18.10	18.40		23.98	23.98	-7.10	-1.50	26.99	Pass
11a	6Mbps	1	60	5300	18.00	17.60		23.98	23.98	-7.10	-1.50	26.99	Pass
11a	6Mbps	1	64	5320	18.00	18.10		23.98	23.98	-7.10	-1.50	26.99	Pass
HT20	MCS0	1	52	5260	18.00	18.20		23.98	23.98	-7.10	-1.50	26.99	Pass
HT20	MCS0	1	60	5300	18.40	18.10		23.98	23.98	-7.10	-1.50	26.99	Pass
HT20	MCS0	1	64	5320	18.40	18.40		23.98	23.98	-7.10	-1.50	26.99	Pass
HT40	MCS0	1	54	5270	20.30	20.50		23.98	23.98	-7.10	-1.50	26.99	Pass
HT40	MCS0	1	62	5310	16.50	16.20		23.98	23.98	-7.10	-1.50	26.99	Pass
VHT20	MCS0	1	52	5260	17.90	18.10		23.98	23.98	-7.10	-1.50	26.99	Pass
VHT20	MCS0	1	60	5300	18.40	18.00		23.98	23.98	-7.10	-1.50	26.99	Pass
VHT20	MCS0	1	64	5320	18.50	18.40		23.98	23.98	-7.10	-1.50	26.99	Pass
VHT40	MCS0	1	54	5270	20.00	20.10		23.98	23.98	-7.10	-1.50	26.99	Pass
VHT40	MCS0	1	62	5310	16.40	16.10		23.98	23.98	-7.10	-1.50	26.99	Pass
VHT80	MCS0	1	58	5290	16.20	16.40		23.98	23.98	-7.10	-1.50	26.99	Pass
11a	6Mbps	2	52	5260	18.40	18.60	21.51	23.98		-1.50		26.99	Pass
11a	6Mbps	2	60	5300	18.40	18.20	21.31	23.98		-1.50		26.99	Pass
11a	6Mbps	2	64	5320	18.20	18.20	21.21	23.98		-1.50		26.99	Pass
HT20	MCS0	2	52	5260	18.10	18.40	21.26	23.98		-1.50		26.99	Pass
HT20	MCS0	2	60	5300	18.50	18.30	21.41	23.98		-1.50		26.99	Pass
HT20	MCS0	2	64	5320	18.50	18.50	21.51	23.98		-1.50		26.99	Pass
HT40	MCS0	2	54	5270	20.50	20.50	23.51	23.98		-1.50		26.99	Pass
HT40	MCS0	2	62	5310	16.90	16.70	19.81	23.98		-1.50		26.99	Pass
VHT20	MCS0	2	52	5260	18.00	18.30	21.16	23.98		-1.50		26.99	Pass
VHT20	MCS0	2	60	5300	18.50	18.20	21.36	23.98		-1.50		26.99	Pass
VHT20	MCS0	2	64	5320	18.60	18.50	21.56	23.98		-1.50		26.99	Pass
VHT40	MCS0	2	54	5270	20.10	20.20	23.16	23.98		-1.50		26.99	Pass
VHT40	MCS0	2	62	5310	16.80	16.60	19.71	23.98		-1.50		26.99	Pass
VHT80	MCS0	2	58	5290	16.80	16.40	19.61	23.98		-1.50		26.99	Pass

TEST RESULTS DATA
Average Power Table

FCC Band III													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
					Ant 4	Ant 5	SUM	Ant 4	Ant 5	Ant 4	Ant 5		
11a	6Mbps	1	100	5500	18.10	17.80		23.98	23.98	0.00	0.50	26.99	Pass
11a	6Mbps	1	116	5580	17.80	17.90		23.98	23.98	0.00	0.50	26.99	Pass
11a	6Mbps	1	140	5700	18.20	18.20		23.98	23.98	0.00	0.50	26.99	Pass
11a	6Mbps	1	144	5720	17.90	18.20		23.81	23.81	0.00	0.50	26.99	Pass
HT20	MCS0	1	100	5500	18.10	18.50		23.98	23.98	0.00	0.50	26.99	Pass
HT20	MCS0	1	116	5580	17.70	17.90		23.98	23.98	0.00	0.50	26.99	Pass
HT20	MCS0	1	140	5700	18.20	18.10		23.98	23.98	0.00	0.50	26.99	Pass
HT20	MCS0	1	144	5720	17.80	18.10		23.64	23.64	0.00	0.50	26.99	Pass
HT40	MCS0	1	102	5510	19.30	19.00		23.98	23.98	0.00	0.50	26.99	Pass
HT40	MCS0	1	110	5550	20.40	20.40		23.98	23.98	0.00	0.50	26.99	Pass
HT40	MCS0	1	134	5670	20.60	20.20		23.98	23.98	0.00	0.50	26.99	Pass
HT40	MCS0	1	142	5710	20.50	20.20		23.98	23.98	0.00	0.50	26.99	Pass
VHT20	MCS0	1	100	5500	18.20	18.50		23.98	23.98	0.00	0.50	26.99	Pass
VHT20	MCS0	1	116	5580	17.50	17.50		23.98	23.98	0.00	0.50	26.99	Pass
VHT20	MCS0	1	140	5700	17.70	17.70		23.98	23.98	0.00	0.50	26.99	Pass
VHT20	MCS0	1	144	5720	17.60	17.90		23.64	23.64	0.00	0.50	26.99	Pass
VHT40	MCS0	1	102	5510	19.20	18.90		23.98	23.98	0.00	0.50	26.99	Pass
VHT40	MCS0	1	110	5550	20.30	20.30		23.98	23.98	0.00	0.50	26.99	Pass
VHT40	MCS0	1	134	5670	20.20	20.20		23.98	23.98	0.00	0.50	26.99	Pass
VHT40	MCS0	1	142	5710	20.20	20.20		23.98	23.98	0.00	0.50	26.99	Pass
VHT80	MCS0	1	106	5530	16.40	16.50		23.98	23.98	0.00	0.50	26.99	Pass
VHT80	MCS0	1	122	5610	20.10	20.50		23.98	23.98	0.00	0.50	26.99	Pass
VHT80	MCS0	1	138	5690	20.10	20.60		23.98	23.98	0.00	0.50	26.99	Pass
11a	6Mbps	2	100	5500	18.30	18.50	21.41	23.98		0.50		26.99	Pass
11a	6Mbps	2	116	5580	18.00	18.30	21.16	23.98		0.50		26.99	Pass
11a	6Mbps	2	140	5700	18.20	18.70	21.47	23.98		0.50		26.99	Pass
11a	6Mbps	2	144	5720	18.10	18.60	21.37	23.81		0.50		26.99	Pass
HT20	MCS0	2	100	5500	18.20	18.40	21.31	23.98		0.50		26.99	Pass
HT20	MCS0	2	116	5580	17.80	17.90	20.86	23.98		0.50		26.99	Pass
HT20	MCS0	2	140	5700	18.20	18.30	21.26	23.98		0.50		26.99	Pass
HT20	MCS0	2	144	5720	17.90	18.00	20.96	23.64		0.50		26.99	Pass
HT40	MCS0	2	102	5510	19.50	19.70	22.61	23.98		0.50		26.99	Pass
HT40	MCS0	2	110	5550	20.80	20.50	23.66	23.98		0.50		26.99	Pass
HT40	MCS0	2	134	5670	20.70	20.60	23.66	23.98		0.50		26.99	Pass
HT40	MCS0	2	142	5710	20.60	20.60	23.61	23.98		0.50		26.99	Pass
VHT20	MCS0	2	100	5500	18.10	18.40	21.26	23.98		0.50		26.99	Pass
VHT20	MCS0	2	116	5580	17.90	17.90	20.91	23.98		0.50		26.99	Pass
VHT20	MCS0	2	140	5700	18.10	18.30	21.21	23.98		0.50		26.99	Pass
VHT20	MCS0	2	144	5720	17.90	18.30	21.11	23.64		0.50		26.99	Pass
VHT40	MCS0	2	102	5510	19.40	19.60	22.51	23.98		0.50		26.99	Pass
VHT40	MCS0	2	110	5550	20.70	20.40	23.56	23.98		0.50		26.99	Pass
VHT40	MCS0	2	134	5670	20.30	20.50	23.41	23.98		0.50		26.99	Pass
VHT40	MCS0	2	142	5710	20.20	20.50	23.36	23.98		0.50		26.99	Pass
VHT80	MCS0	2	106	5530	16.70	16.70	19.71	23.98		0.50		26.99	Pass
VHT80	MCS0	2	122	5610	20.60	20.60	23.61	23.98		0.50		26.99	Pass
VHT80	MCS0	2	138	5690	20.20	20.70	23.47	23.98		0.50		26.99	Pass



Appendix B. Radiated Spurious Emission

Test Engineer :	Ryan Lin, JC Liang, and Wilson Wu	Temperature :	20~25°C
		Relative Humidity :	50~55%

Band 1 - 5150~5250MHz
WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI Ant. 4+5	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 38 5190MHz		5146.9	57.5	-16.5	74	49.22	31.69	6.08	29.49	108	237	P	H
		5150	51.72	-2.28	54	43.44	31.69	6.08	29.49	108	237	A	H
	*	5190	101.33	-	-	93.01	31.71	6.1	29.49	108	237	P	H
	*	5190	94.44	-	-	86.12	31.71	6.1	29.49	108	237	A	H
		5351.64	47.61	-26.39	74	39.2	31.81	6.12	29.52	108	237	P	H
		5455.8	40.3	-13.7	54	31.79	31.87	6.18	29.54	108	237	A	H
		5148.2	57.52	-16.48	74	49.24	31.69	6.08	29.49	100	124	P	V
		5150	51.6	-2.4	54	43.32	31.69	6.08	29.49	100	124	A	V
	*	5190	102.57	-	-	94.25	31.71	6.1	29.49	100	124	P	V
	*	5190	95.94	-	-	87.62	31.71	6.1	29.49	100	124	A	V
		5431.16	47.31	-26.69	74	38.84	31.86	6.15	29.54	100	124	P	V
		5456.92	39.95	-14.05	54	31.44	31.87	6.18	29.54	100	124	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz
WIFI 802.11n HT40 (Harmonic @ 3m)

Table with 14 columns: WIFI Ant. 4+5, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Path Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include 802.11n, HT40, CH 38, 5190MHz and a Remark section.



Band 2 - 5250~5350MHz
WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI Ant. 4+5	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 62 5310MHz		5097.58	48.98	-25.02	74	40.75	31.66	6.05	29.48	100	237	P	H
		5074.46	41.18	-12.82	54	32.96	31.65	6.04	29.47	100	237	A	H
	*	5310	104.91	-	-	96.52	31.79	6.12	29.52	100	237	P	H
	*	5310	97.65	-	-	89.26	31.79	6.12	29.52	100	237	A	H
		5351.04	59.46	-14.54	74	51.05	31.81	6.12	29.52	100	237	P	H
		5350.08	50.91	-3.09	54	42.5	31.81	6.12	29.52	100	237	A	H
		5062.22	48.88	-25.12	74	40.68	31.64	6.03	29.47	100	129	P	V
		5074.12	40.99	-13.01	54	32.77	31.65	6.04	29.47	100	129	A	V
	*	5310	104	-	-	95.61	31.79	6.12	29.52	100	129	P	V
	*	5310	96.61	-	-	88.22	31.79	6.12	29.52	100	129	A	V
		5355.36	58.15	-15.85	74	49.74	31.81	6.12	29.52	100	129	P	V
	5350.08	50.56	-3.44	54	42.15	31.81	6.12	29.52	100	129	A	V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

Band 2 5250~5350MHz
WIFI 802.11n HT40 (Harmonic @ 3m)

WIFI Ant. 4+5	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 62 5310MHz		10620	48.2	-25.8	74	54.84	40.12	10.04	56.8	100	0	P	H
		15930	45.87	-28.13	74	51.52	37.67	12.86	56.18	100	0	P	H
		10620	47.2	-26.8	74	53.84	40.12	10.04	56.8	100	0	P	V
		15930	45.51	-28.49	74	51.16	37.67	12.86	56.18	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 - 5470~5725MHz
WIFI 802.11ac VHT80 (Band Edge @ 3m)

WIFI Ant. 4+5	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80 CH 106 5530MHz		5455.84	59.53	-14.47	74	51.02	31.87	6.18	29.54	104	74	P	H
		5466.16	58.12	-10.08	68.2	49.59	31.88	6.19	29.54	104	74	P	H
		5455.36	51.22	-2.78	54	42.71	31.87	6.18	29.54	104	74	A	H
	*	5530	99.51	-	-	90.89	31.92	6.25	29.55	104	74	P	H
	*	5530	92.38	-	-	83.76	31.92	6.25	29.55	104	74	A	H
		5759.645	50.28	-17.92	68.2	41.2	32.26	6.38	29.56	104	74	P	H
		5453.68	56.98	-17.02	74	48.48	31.87	6.17	29.54	111	110	P	V
		5470	57.63	-10.57	68.2	49.1	31.88	6.19	29.54	111	110	P	V
		5457.04	49.68	-4.32	54	41.17	31.87	6.18	29.54	111	110	A	V
	*	5530	100.92	-	-	92.3	31.92	6.25	29.55	111	110	P	V
	*	5530	93.59	-	-	84.97	31.92	6.25	29.55	111	110	A	V
		5740.115	48.79	-19.41	68.2	39.72	32.24	6.38	29.55	111	110	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

Band 3 5470~5725MHz
WIFI 802.11ac VHT80 (Harmonic @ 3m)

WIFI Ant. 4+5	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80 CH 106 5530MHz		11060	48.37	-25.63	74	54.18	40.42	10.25	56.48	100	0	P	H
		16590	47.18	-21.02	68.2	50.68	39.5	12.77	55.77	100	0	P	H
		11060	47.11	-26.89	74	52.92	40.42	10.25	56.48	100	0	P	V
		16590	47.11	-21.09	68.2	50.61	39.5	12.77	55.77	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz
WIFI 802.11n HT40 (LF @ 3m)

Table with 14 columns: WIFI Ant. 4+5, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Path Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include frequency data for 802.11n HT40 LF and a Remark section.



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) = Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
= 55.45 (dBμV/m)
2. Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 55.45(dBμV/m) – 74(dBμV/m)
= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
= 43.54 (dBμV/m)
2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)
= 43.54(dBμV/m) – 54(dBμV/m)
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.



Appendix C. Radiated Spurious Emission Plots




Test Engineer :	Ryan Lin, JC Liang, and Wilson Wu	Temperature :	20~25°C
		Relative Humidity :	50~55%

Note symbol



-L	Low channel location
-R	High channel location






Band 1 - 5150~5250MHz
WIFI 802.11n HT40 (Band Edge @ 3m)

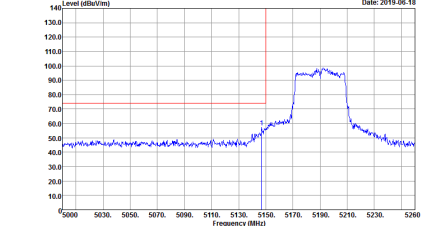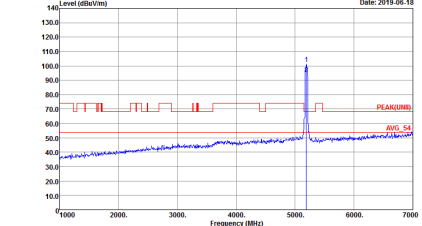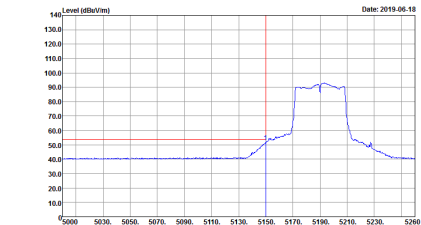WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11n HT40 CH38 5190MHz - L	
4+5	Horizontal	Fundamental
Peak	 <p>Site : 03CH13-HY Condition : PEAK_BE_74 3m HORN_91200_1241 HORIZONTAL Detector : Peak Project : 8N0620-06 Mode : 1 Power : 15</p>	 <p>Site : 03CH13-HY Condition : PEAK(LINII) 3m HORN_91200_1241 HORIZONTAL Detector : Peak Project : 8N0620-06 Mode : 1 Power : 15</p>
Avg.	 <p>Site : 03CH13-HY Condition : AVG_BE_54 3m HORN_91200_1241 HORIZONTAL Detector : Peak Project : 8N0620-06 Mode : 1 Power : 15</p>	Left blank

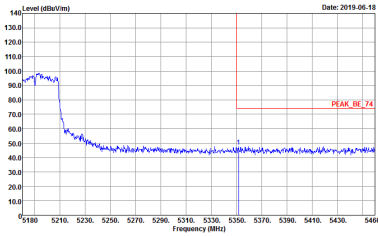
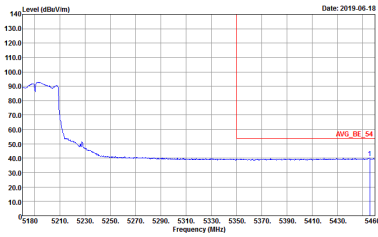


WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11n HT40 CH38 5190MHz - R	
4+5	Horizontal	Fundamental
<p>Peak</p>	 <p>Site : 03CH13-HY Condition : PEAK_BE_74 3m HORN_9120D_1241 HORIZONTAL Detector : Peak Project : BN0620-06 Mode : 1 Power : 15</p>	<p>Left blank</p>
<p>Avg.</p>	 <p>Site : 03CH13-HY Condition : AVG_BE_54 3m HORN_9120D_1241 HORIZONTAL Detector : Peak Project : BN0620-06 Mode : 1 Power : 15</p>	<p>Left blank</p>

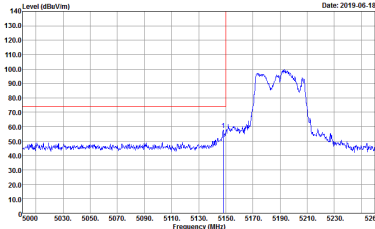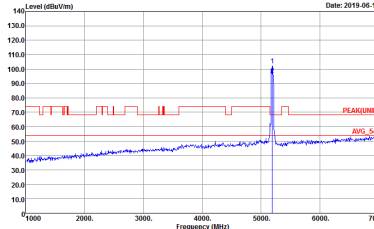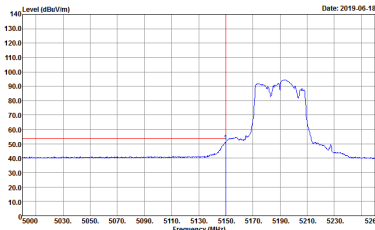

WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11n HT40 CH38 5190MHz - L	
4+5	Vertical	Fundamental
<p>Peak</p>	 <p>Site : 03CH13-HY Condition : PEAK_BE_74 3m HORN_9120D_1241 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 8N0620-06 Mode : 1 Power : 15</p>	 <p>Site : 03CH13-HY Condition : PEAK(UNII) 3m HORN_9120D_1241 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 8N0620-06 Mode : 1 Power : 15</p>
<p>Avg.</p>	 <p>Site : 03CH13-HY Condition : AVG_BE_54 3m HORN_9120D_1241 VERTICAL RBW:1000.000KHz VBW:3.000KHz SWT:Auto Detector : Peak Project : 8N0620-06 Mode : 1 Power : 15</p>	<p>Left blank</p>

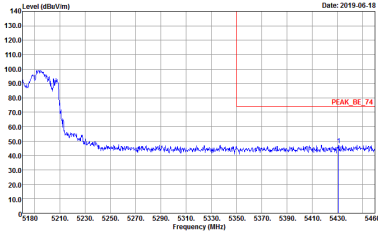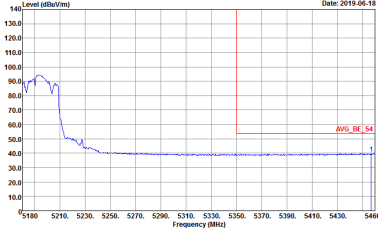

WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11n HT40 CH38 5190MHz - R	
4+5	Vertical	Fundamental
<p>Peak</p>	 <p>Site : 03CH13-HY Condition : PEAK_BE_74 3m HORN_9120D_1241 VERTICAL Detector : Peak Project : BN0620-06 Mode : 1 Power : 15</p>	<p>Left blank</p>
<p>Avg.</p>	 <p>Site : 03CH13-HY Condition : AVG_BE_54 3m HORN_9120D_1241 VERTICAL Detector : Peak Project : BN0620-06 Mode : 1 Power : 15</p>	<p>Left blank</p>






Band 1 - 5150~5250MHz
WIFI 802.11n HT40 (Harmonic @ 3m)



WIFI	Band 1 5150~5250MHz Harmonic @ 3m	
ANT	802.11n HT40 CH38 5190MHz	
4+5	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH13-HY Condition : PEAK(UNII) 3m HORN_91200_1241 HORIZONTAL Detector : Peak Project : 8N0620-05 Mode : 1 Power : 15</p>	<p>Site : 03CH13-HY Condition : PEAK(UNII) 3m HORN_91200_1241 VERTICAL Detector : Peak Project : 8N0620-05 Mode : 1 Power : 15</p>



Band 2 - 5250~5350MHz
WIFI 802.11n HT40 (Band Edge @ 3m)

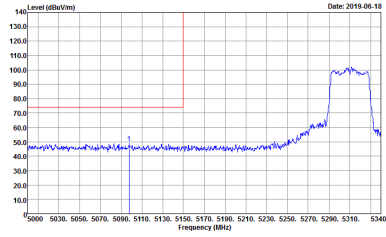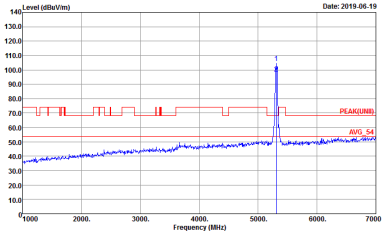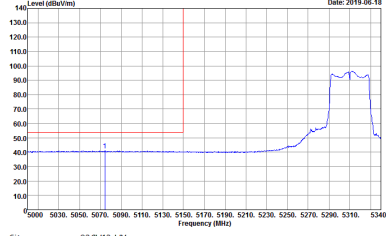WIFI	Band 2 5250~5350MHz Band Edge @ 3m	
ANT	802.11n HT40 CH62 5310MHz - L	
4+5	Horizontal	Fundamental
Peak	 <p>Site : 03CH13-HY Condition : PEAK_BE_74 3m HORN_9120D_1241 HORIZONTAL Detector : Peak Project : 8N0620-06 Mode : 2 Power : 17.5</p>	 <p>Site : 03CH13-HY Condition : PEAK(UNII) 3m HORN_9120D_1241 HORIZONTAL Detector : Peak Project : 8N0620-06 Mode : 2 Power : 17.5</p>
Avg.	 <p>Site : 03CH13-HY Condition : AVG_BE_54 3m HORN_9120D_1241 HORIZONTAL Detector : Peak Project : 8N0620-06 Mode : 2 Power : 17.5</p>	Left blank

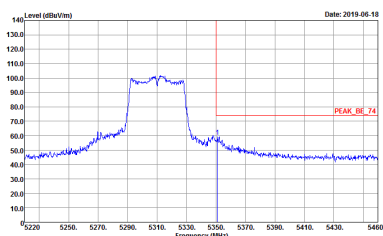
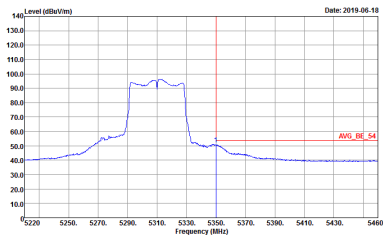


WIFI	Band 2 5250~5350MHz Band Edge @ 3m	
ANT	802.11n HT40 CH62 5310MHz - R	
4+5	Horizontal	Fundamental
<p>Peak</p>	 <p>Site : 03CH13-HY Condition : PEAK_BE_74 3m HORN_9120D_1241 HORIZONTAL Detector : Peak Project : BN0620-06 Mode : 2 Power : 17.5</p>	<p>Left blank</p>
<p>Avg.</p>	 <p>Site : 03CH13-HY Condition : AVG_BE_54 3m HORN_9120D_1241 HORIZONTAL Detector : Peak Project : BN0620-06 Mode : 2 Power : 17.5</p>	<p>Left blank</p>



WIFI	Band 2 5250~5350MHz Band Edge @ 3m	
ANT	802.11n HT40 CH62 5310MHz - L	
4+5	Vertical	Fundamental
Peak	<p>Site : 03CH13-HY Condition : PEAK_BE_74 3m HORN_9120D_1241 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 8N0620-06 Mode : 2 Power : 17.5</p>	<p>Site : 03CH13-HY Condition : PEAK(UNII) 3m HORN_9120D_1241 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 8N0620-06 Mode : 2 Power : 17.5</p>
Avg.	<p>Site : 03CH13-HY Condition : AVG_BE_54 3m HORN_9120D_1241 VERTICAL RBW:1000.000KHz VBW:3.000KHz SWT:Auto Detector : Peak Project : 8N0620-06 Mode : 2 Power : 17.5</p>	Left blank

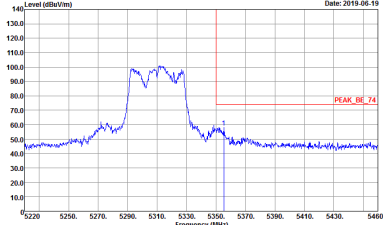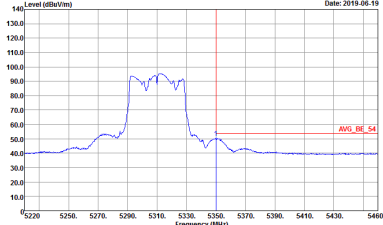

WIFI	Band 2 5250~5350MHz Band Edge @ 3m	
ANT	802.11n HT40 CH62 5310MHz - R	
4+5	Vertical	Fundamental
<p>Peak</p>	 <p>Site : 03CH13-HY Condition : PEAK_BE_74 3m HORN_9120D_1241 VERTICAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector : Peak Project : BN0620-06 Mode : 2 Power : 17.5</p>	<p>Left blank</p>
<p>Avg.</p>	 <p>Site : 03CH13-HY Condition : AVG_BE_54 3m HORN_9120D_1241 VERTICAL RBW:1000.000kHz VBW:3.000kHz SWT:Auto Detector : Peak Project : BN0620-06 Mode : 2 Power : 17.5</p>	<p>Left blank</p>






Band 2 - 5250~5350MHz
WIFI 802.11n HT40 (Harmonic @ 3m)

WIFI	Band 2 5250~5350MHz Harmonic @ 3m	
ANT	802.11n HT40 CH62 5310MHz	
4+5	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH13-HY Condition : PEAK(UNII) 3m HORN_91200_1241 HORIZONTAL Detector : Peak Project : 8N0620-05 Mode : 2 Power : 17.5</p>	<p>Site : 03CH13-HY Condition : PEAK(UNII) 3m HORN_91200_1241 VERTICAL Detector : Peak Project : 8N0620-05 Mode : 2 Power : 17.5</p>






Band 3 - 5470~5725MHz
WIFI 802.11ac VHT80 (Band Edge @ 3m)

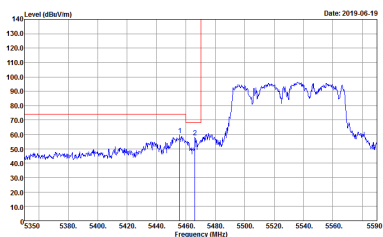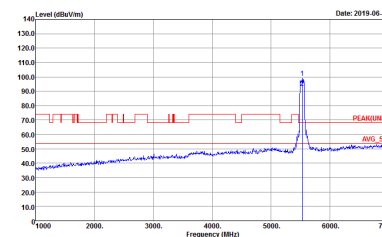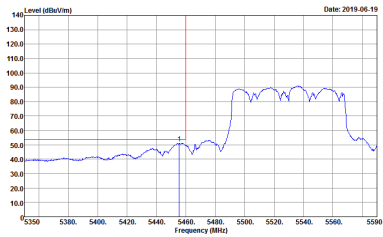WIFI	Band 3 5470~5725MHz Band Edge @ 3m	
ANT	802.11ac VHT80 CH106 5530MHz - L	
4+5	Horizontal	Fundamental
Peak	 <p>Site : 03CH13-HY Condition : PEAK_BE(UNIT)_B3 3m HORN_91200_1241 HORIZONTAL Detector : Peak Project : 8N0620-06 Mode : 3 Power : 18</p>	 <p>Site : 03CH13-HY Condition : PEAK(UNIT) 3m HORN_91200_1241 HORIZONTAL Detector : Peak Project : 8N0620-06 Mode : 3 Power : 18</p>
Avg.	 <p>Site : 03CH13-HY Condition : AVG_BE(UNIT)_B3 3m HORN_91200_1241 HORIZONTAL Detector : Peak Project : 8N0620-06 Mode : 3 Power : 18</p>	Left blank



WIFI	Band 3 5470~5725MHz Band Edge @ 3m	
ANT	802.11ac VHT80 CH106 5530MHz - R	
4+5	Horizontal	Fundamental
Peak	<p>Site : 03CH13-HV Condition : PEAK_BE(UNIT)_B3 3m HORN_91200_1241 HORIZONTAL Detector : Peak Project : BN0620-06 Mode : 3 Power : 18</p>	Left blank

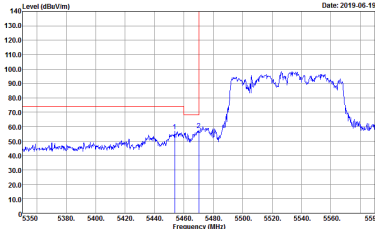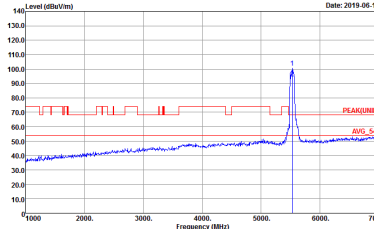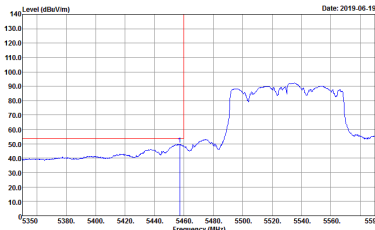

WIFI	Band 3 5470~5725MHz Band Edge @ 3m	
ANT	802.11ac VHT80 CH106 5530MHz - L	
4+5	Vertical	Fundamental
<p>Peak</p>	 <p>Site : 03CH13-HY Condition : PEAK_BE(UNII)_B3 3m HORN_91200_1241 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 8N0620-06 Mode : 3 Power : 18</p>	 <p>Site : 03CH13-HY Condition : PEAK(UNII) 3m HORN_91200_1241 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 8N0620-06 Mode : 3 Power : 18</p>
<p>Avg.</p>	 <p>Site : 03CH13-HY Condition : AVG_BE(UNII)_B3 3m HORN_91200_1241 VERTICAL RBW:1000.000KHz VBW:3.000KHz SWT:Auto Detector : Peak Project : 8N0620-06 Mode : 3 Power : 18</p>	<p>Left blank</p>



WIFI	Band 3 5470~5725MHz Band Edge @ 3m	
ANT	802.11ac VHT80 CH106 5530MHz - R	
4+5	Vertical	Fundamental
Peak	<p>Site : 03CH12-HY Condition : PEAK_BE(UNIT)_B3 3m HORN_91200_1241 VERTICAL Detector : Peak Project : BN0620-06 Mode : 3 Power : 18</p>	Left blank



Band 3 - 5470~5725MHz
WIFI 802.11ac VHT80 (Harmonic @ 3m)

WIFI	Band 3 5470~5725MHz Harmonic @ 3m	
ANT	802.11ac VHT80 CH106 5530MHz	
4+5	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH13-HY Condition : PEAK(LINE) 3m HORN_91200_1241 HORIZONTAL Detector : Peak Project : 8N0620-05 Mode : 3 Power : 18</p>	<p>Site : 03CH13-HY Condition : PEAK(LINE) 3m HORN_91200_1241 VERTICAL Detector : Peak Project : 8N0620-05 Mode : 3 Power : 18</p>



Emission below 1GHz
5GHz WIFI 802.11n HT40 (LF)

WIFI	5GHz WIFI	
ANT	802.11n HT40 LF	
4+5	Horizontal	Vertical
QP / Peak	<p>Site : 03CH13-HY Condition : QP 3m B1LOG_40103 HORIZONTAL Detector : Peak Project : 8N0620-06 Mode : -4</p>	<p>Site : 03CH13-HY Condition : QP 3m B1LOG_40103 VERTICAL Detector : Peak Project : 8N0620-06 Mode : -4</p>




Appendix D. Duty Cycle Plots

Antenna	Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting	Duty Factor(dB)
4+5	5GHz 802.11n HT40 for Ant 4	95.94	945.00	1.06	3kHz	0.18
4+5	5GHz 802.11n HT40 for Ant 5	95.45	945.00	1.06	3kHz	0.20
4+5	5GHz 802.11ac VHT80 for Ant 4	92.40	462.00	2.16	3kHz	0.34
4+5	5GHz 802.11ac VHT80 for Ant 5	92.80	464.00	2.16	3kHz	0.32

MIMO <Ant. 4>


802.11n HT40

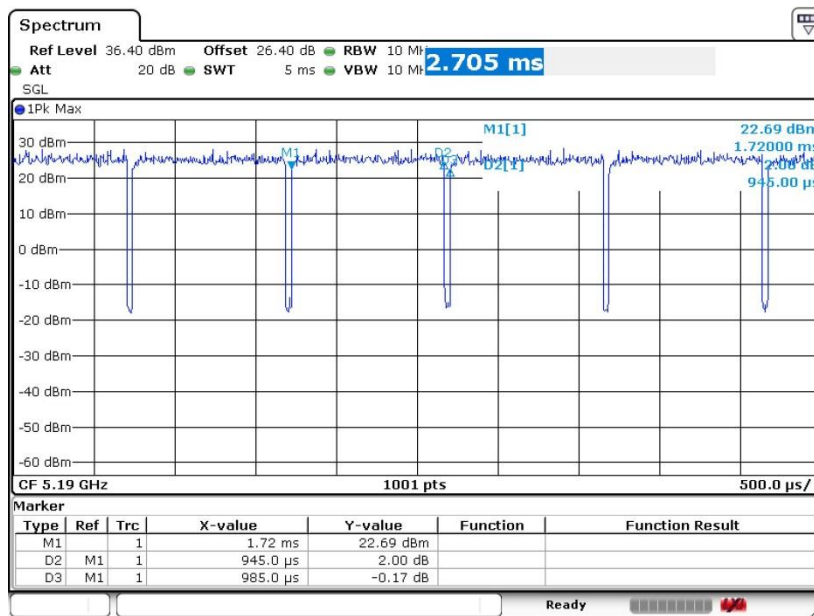

Date: 20.JUN.2019 04:04:38




802.11ac VHT80

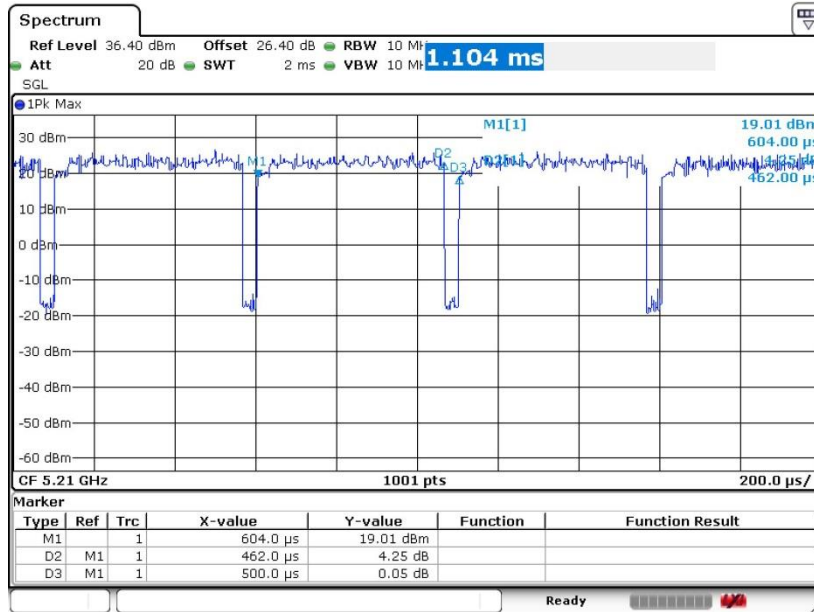

Date: 20.JUN.2019 03:50:34

MIMO <Ant. 5>


802.11n HT40

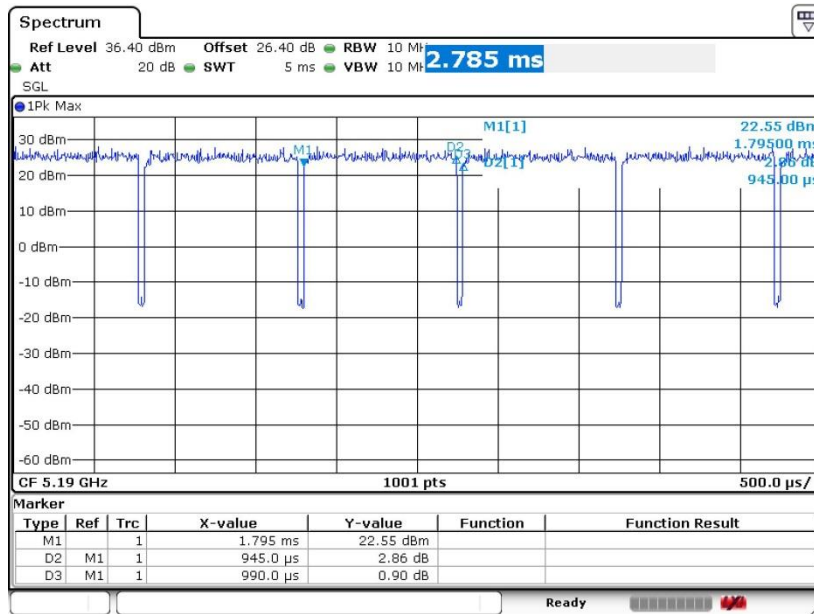

Date: 20.JUN.2019 04:05:40



802.11ac VHT80

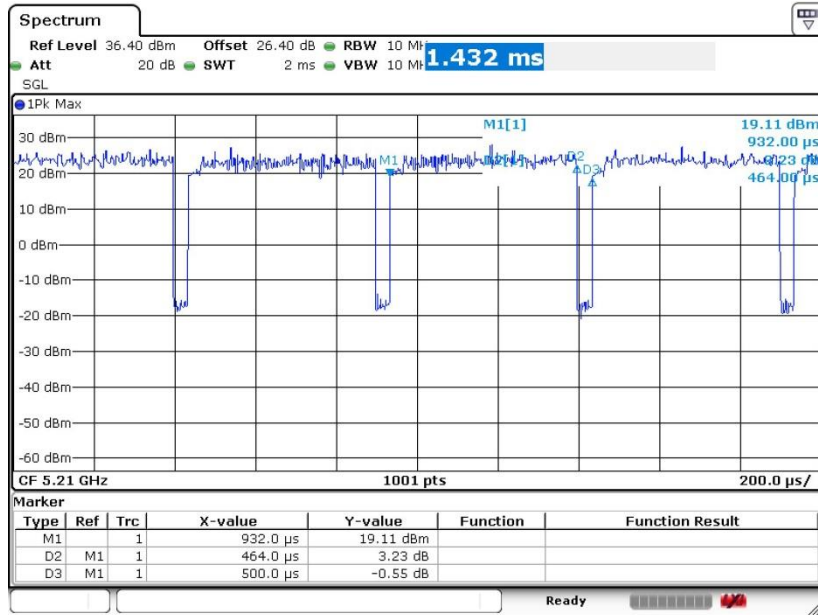

Date: 20.JUN.2019 03:51:41

————THE END————