



FCC RADIO TEST REPORT

FCC ID : A4RG025J
Equipment : Phone
Model Name : G025J, G025N, G025M
Applicant : Google LLC
1600 Amphitheatre Parkway,
Mountain View, California, 94043 USA
Standard : FCC Part 15 Subpart C §15.247

The product was received on Jan. 17, 2020 and testing was started from Jan. 23, 2020 and completed on Mar. 13, 2020. We, SPORTON INTERNATIONAL INC., EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Louis Wu

Approved by: Louis Wu

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory
No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Product Specification of Equipment Under Test.....	6
1.3 Modification of EUT	6
1.4 Testing Location	7
1.5 Applicable Standards.....	7
2 Test Configuration of Equipment Under Test	8
2.1 Carrier Frequency and Channel	8
2.2 Test Mode.....	9
2.3 Connection Diagram of Test System.....	10
2.4 Support Unit used in test configuration and system	11
2.5 EUT Operation Test Setup	11
2.6 Measurement Results Explanation Example.....	11
3 Test Result	12
3.1 6dB and 99% Bandwidth Measurement	12
3.2 Output Power Measurement.....	14
3.3 Power Spectral Density Measurement	15
3.4 Conducted Band Edges and Spurious Emission Measurement	17
3.5 Radiated Band Edges and Spurious Emission Measurement	36
3.6 AC Conducted Emission Measurement.....	40
3.7 Antenna Requirements	42
4 List of Measuring Equipment.....	43
5 Uncertainty of Evaluation	45
Appendix A. Conducted Test Results	
Appendix B. AC Conducted Emission Test Result	
Appendix C. Radiated Spurious Emission	
Appendix D. Radiated Spurious Emission Plots	
Appendix E. Duty Cycle Plots	



History of this test report

Report No.	Version	Description	Issued Date
FR9D0616-05C	01	Initial issue of report	Mar. 27, 2020
FR9D0616-05C	02	Revise section 1.2, 2.2, and appendix A	Mar. 30, 2020



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.247(a)(2)	6dB Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Reporting only	-
3.2	15.247(b)	Power Output Measurement	Pass	-
3.3	15.247(e)	Power Spectral Density	Pass	-
3.4	15.247(d)	Conducted Band Edges	Pass	-
		Conducted Spurious Emission	Pass	-
3.5	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	Pass	Under limit 2.12 dB at 2388.960 MHz
3.6	15.207	AC Conducted Emission	Pass	Under limit 6.59 dB at 0.164 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	Pass	-

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Reviewed by: Wii Chang

Report Producer: Ruby Zou



1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
Equipment	Phone
Model Name	G025J, G025N, G025M
FCC ID	A4RG025J
EUT supports Radios application	CDMA/EV-DO/GSM/EGPRS/WCDMA/HSPA/LTE/NFC/GNSS WLAN 11b/g/n HT20 WLAN 11a/n HT20/HT40 WLAN 11ac VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer.

EUT Information List	
S/N	Performed Test Item
01021FQC200445	Conducted Measurement
01021FQC200294	Radiated Spurious Emission
01021FQC200299	Conducted Emission

1.2 Product Specification of Equipment Under Test

Standards-related Product Specification										
Tx/Rx Channel Frequency Range	2412 MHz ~ 2462 MHz									
Maximum (Average) Output Power to antenna	<p><Ant. 4> 802.11b : 19.80 dBm (0.0955 W) 802.11g : 19.50 dBm (0.0891 W) 802.11n HT20 : 19.30 dBm (0.0851 W) 802.11 ac VHT20 : 19.20 dBm (0.0832 W)</p> <p>MIMO <Ant. 4+3> 802.11b : 22.81 dBm (0.1910 W) 802.11g : 22.56 dBm (0.1803 W) 802.11n HT20 : 22.36 dBm (0.1722 W) 802.11 ac VHT20 : 22.26 dBm (0.1683 W)</p>									
99% Occupied Bandwidth	<p>MIMO <Ant. 4> 802.11b : 14.25MHz 802.11g : 17.35MHz 802.11n HT20 : 18.20MHz</p> <p><MIMO <Ant. 3> 802.11b : 14.15MHz 802.11g : 17.15MHz 802.11n HT20 : 18.10MHz</p>									
Antenna Type / Gain	<p><Ant. 4>PIFA Antenna type with gain 0.50 dBi <Ant. 3>PIFA Antenna type with gain -0.60 dBi</p>									
Type of Modulation	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ac : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)									
Antenna Function for Transmitter	<table border="1"> <thead> <tr> <th></th> <th>Ant. 4</th> <th>Ant. 3</th> </tr> </thead> <tbody> <tr> <td>802.11 b/g/n/ac</td> <td>V</td> <td>-</td> </tr> <tr> <td>802.11 b/g/n/ac MIMO</td> <td>V</td> <td>V</td> </tr> </tbody> </table>		Ant. 4	Ant. 3	802.11 b/g/n/ac	V	-	802.11 b/g/n/ac MIMO	V	V
	Ant. 4	Ant. 3								
802.11 b/g/n/ac	V	-								
802.11 b/g/n/ac MIMO	V	V								

Note: MIMO Ant. 4+3 is a calculated result from sum of the power MIMO Ant. 4 and MIMO Ant. 3.

1.3 Modification of EUT

No modifications are made to the EUT during all test items.



1.4 Testing Location

Test Site	SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory	
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978	
Test Site No.	Sporton Site No.	
	TH05-HY	CO05-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

Test Site	SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory	
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855	
Test Site No.	Sporton Site No.	
	03CH16-HY	

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW1190 and TW0007

1.5 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v05r02
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01.
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.

- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437		



2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.

MIMO Mode

Modulation	Data Rate
802.11b	1 Mbps
802.11g	6 Mbps
802.11n HT20	MCS0
802.11ac VHT20 (Covered by HT20)	MCS0


Test Cases	
AC Conducted Emission	Mode 1 : GSM850 Idle + WLAN (2.4GHz) Link + Bluetooth Link + 3.5mm AJ Headset + USB Cable 2 (Charging from Adapter 2)
Remark: For Radiated Test Cases, the tests were performed with Adapter 1, Battery 1, and USB Cable 1.	

Ch. #	2400-2483.5 MHz		
	802.11b	802.11g	802.11n HT20
Low	01	01	01
		02	02
Middle	06	06	06
High		10	10
	11	11	11


Remark: For radiation spurious emission, the final modulation and the worst data rate was reference the max RF conducted power.

2.3 Connection Diagram of Test System

<AC Conducted Emission Mode>

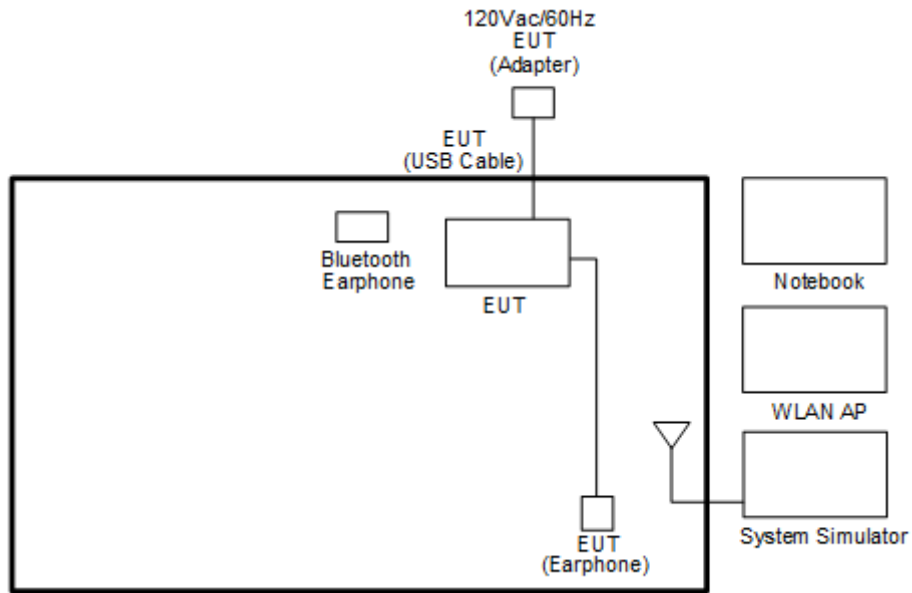

<WLAN TX Mode>

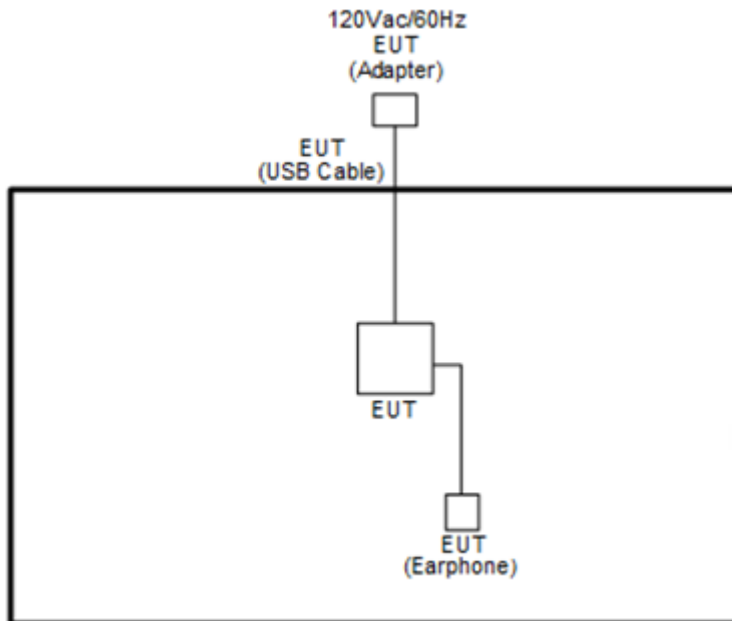



2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
2.	Bluetooth Earphone	Google	G015B	SZGG015B	N/A	N/A
3.	WLAN AP	ASUS	RT-AC66U	MSQ-RTAC66U	N/A	Unshielded, 1.8 m
4.	Notebook	Dell	Latitude 3400	FCC DoC	N/A	AC I/P : Unshielded, 1.2m DC O/P : Shielded, 1.8m

2.5 EUT Operation Test Setup

The RF test items, utility “QRCT V3.0303.0” was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

$$\begin{aligned} \text{Offset}(dB) &= \text{RF cable loss}(dB) + \text{attenuator factor}(dB). \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

3.1.2 Measuring Instruments

See list of measuring equipment of this test report.

3.1.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 11.8.1 (6dB BW).
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW) $\geq 3 * RBW$.
6. Measure and record the results in the test report.


3.1.4 Test Setup





3.1.5 Test Result of 6dB and 99% Occupied Bandwidth

Please refer to Appendix A.

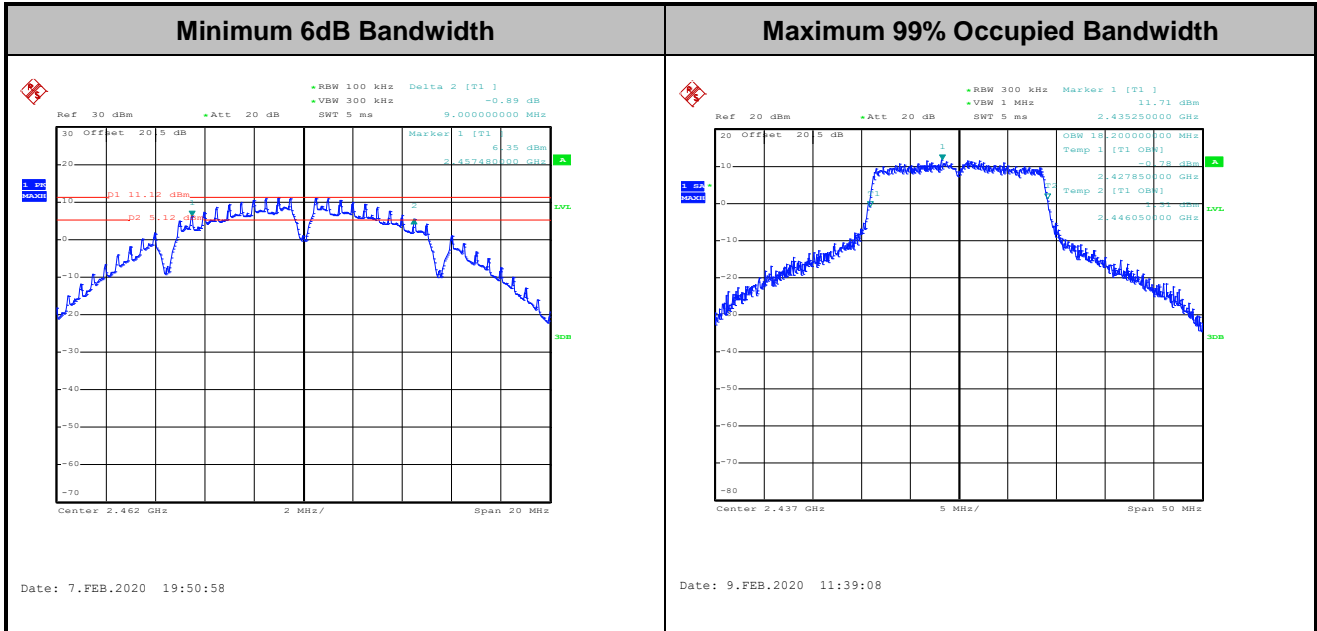

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for average output power is 30dBm. If transmitting antenna with directional gain greater than 6dBi is used, the average output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

See list of measuring equipment of this test report.

3.2.3 Test Procedures

1. For Average Power, the testing follows ANSI C63.10 Section 11.9.2.3.2 Method AVGPM-G
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.
5. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

3.2.4 Test Setup

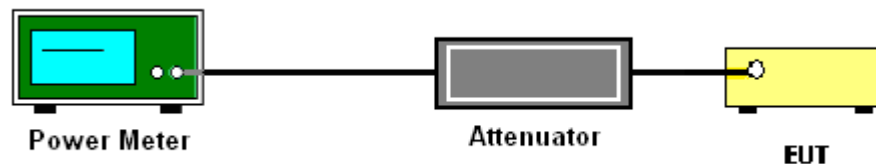

3.2.5 Test Result of Average Output Power

Please refer to Appendix A.



3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.

3.3.2 Measuring Instruments

See list of measuring equipment of this test report.

3.3.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.10.2 Method PKPSD.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.


If measurements performed using method (2) plus $10 \log(N)$ exceeds the emission limit, the test should choose method (1) before declaring that the device fails the emission limit.

Method (1): Measure and sum the spectra across the outputs.

The total final Power Spectral Density is from a device with 2 transmitter outputs. The spectrum measurements of the individual outputs are all performed with the same span and number of points, the spectrum value in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 to obtain the value for the first frequency bin of the summed spectrum.

Method (2): Measure and add $10 \log(N)$ dB, where N is the number of outputs. (N=2)



3.3.4 Test Setup

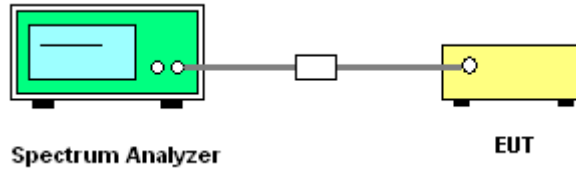

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

<CDD Modes>

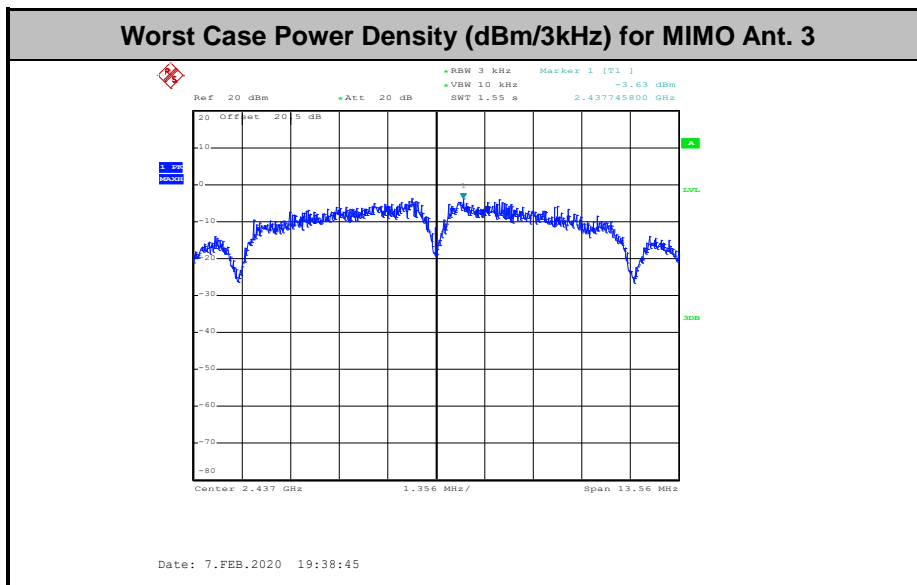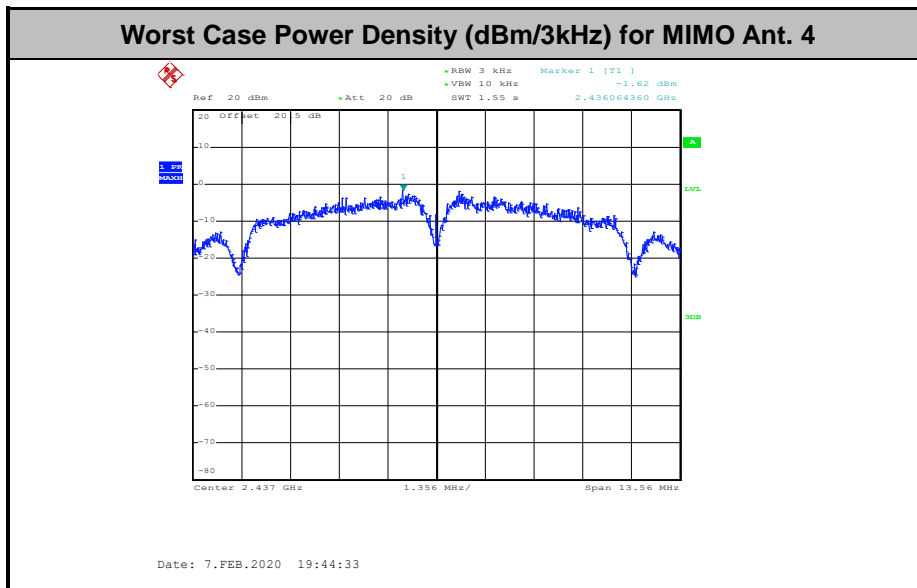

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement.


3.4.2 Measuring Instruments

See list of measuring equipment of this test report.

3.4.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.11.3 Emission level measurement.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup

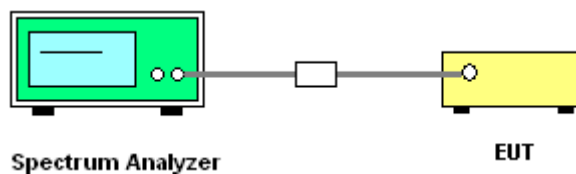





3.4.5 Test Result of Conducted Band Edges and Spurious Emission

Test Engineer :	Owen Yang, Tommy Lee	Temperature :	21~25°C
		Relative Humidity :	51~54%



Number of TX = 2, Ant. 4 (Measured)

Test Mode :	802.11b	Test Channel :	01
-------------	---------	----------------	----

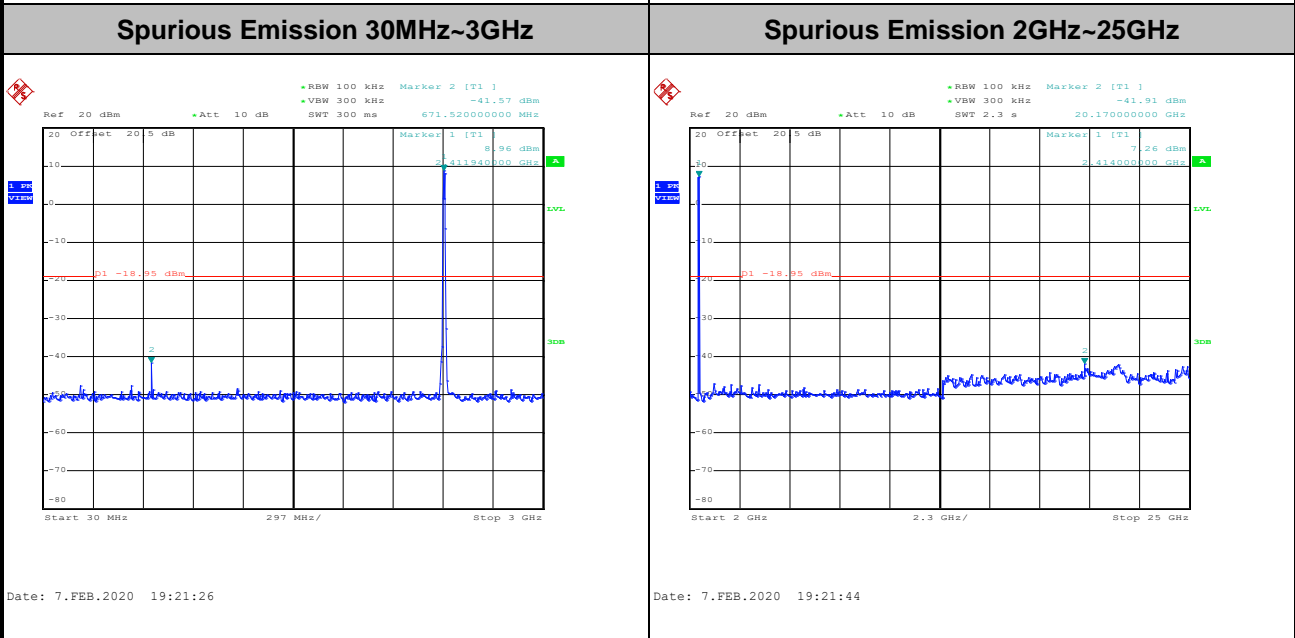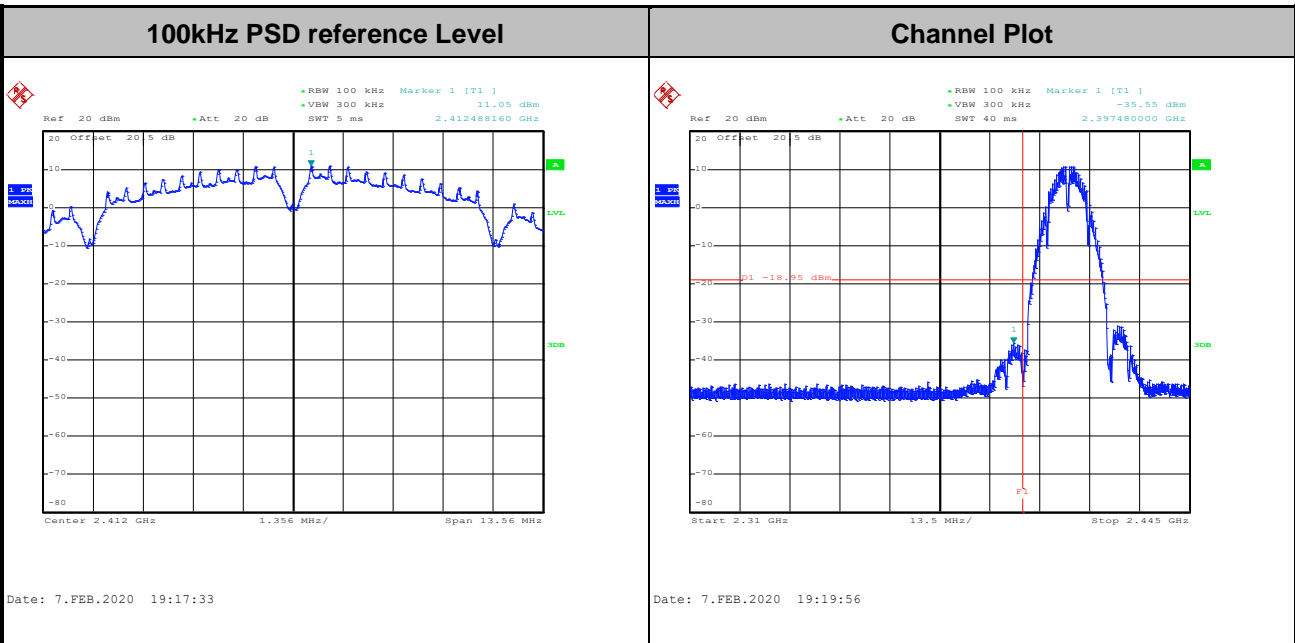





Test Mode :	802.11b	Test Channel :	06
-------------	---------	----------------	----

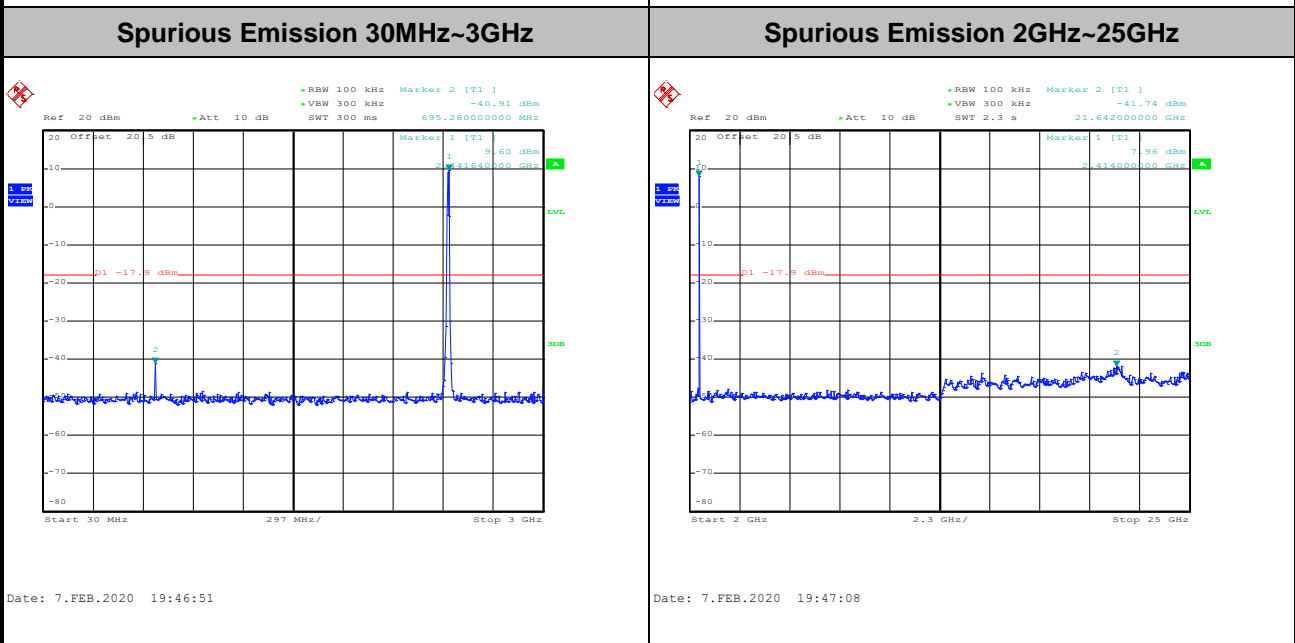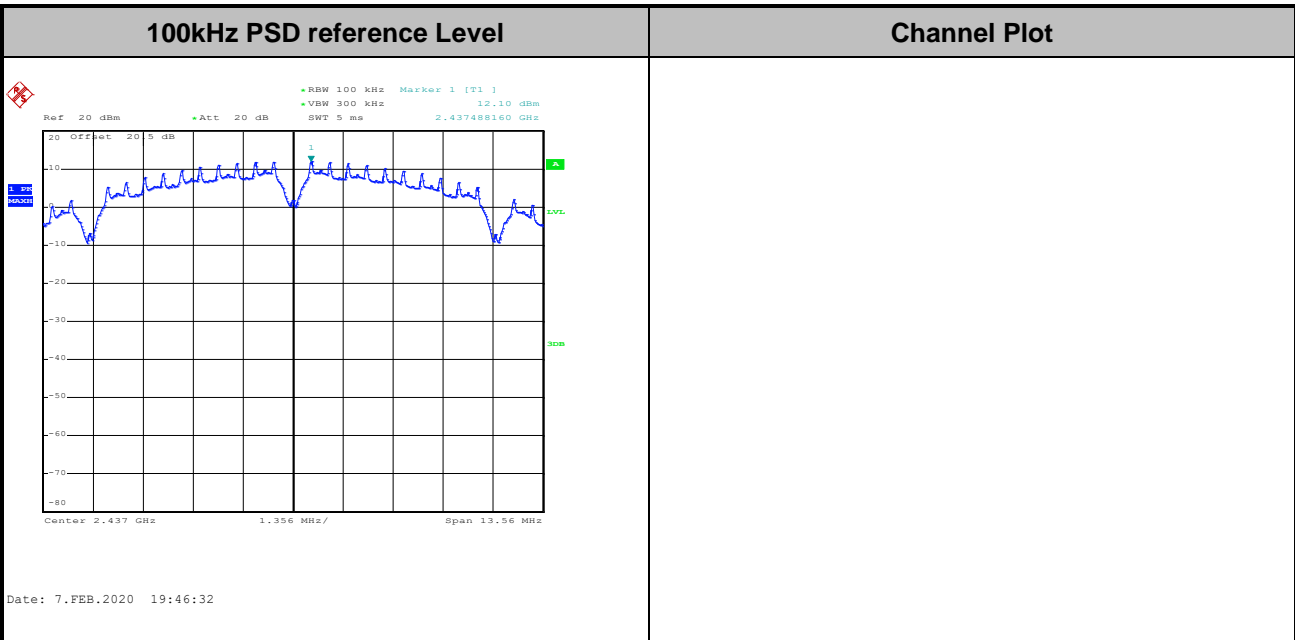





Test Mode :	802.11b	Test Channel :	11
-------------	---------	----------------	----

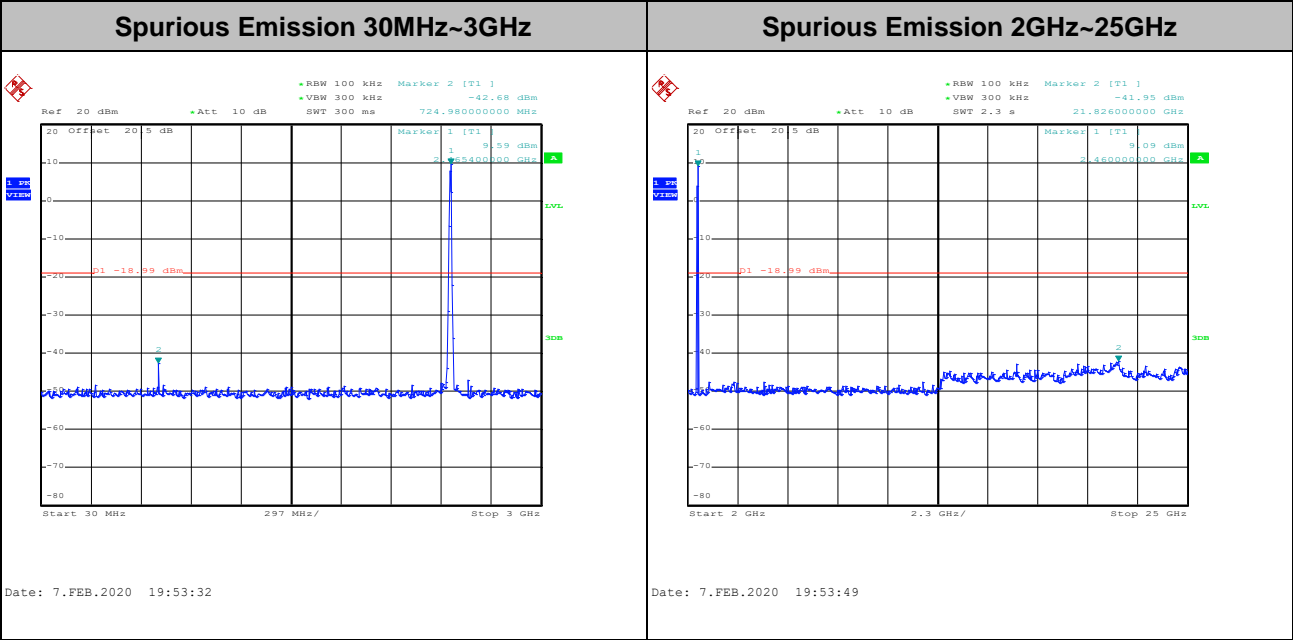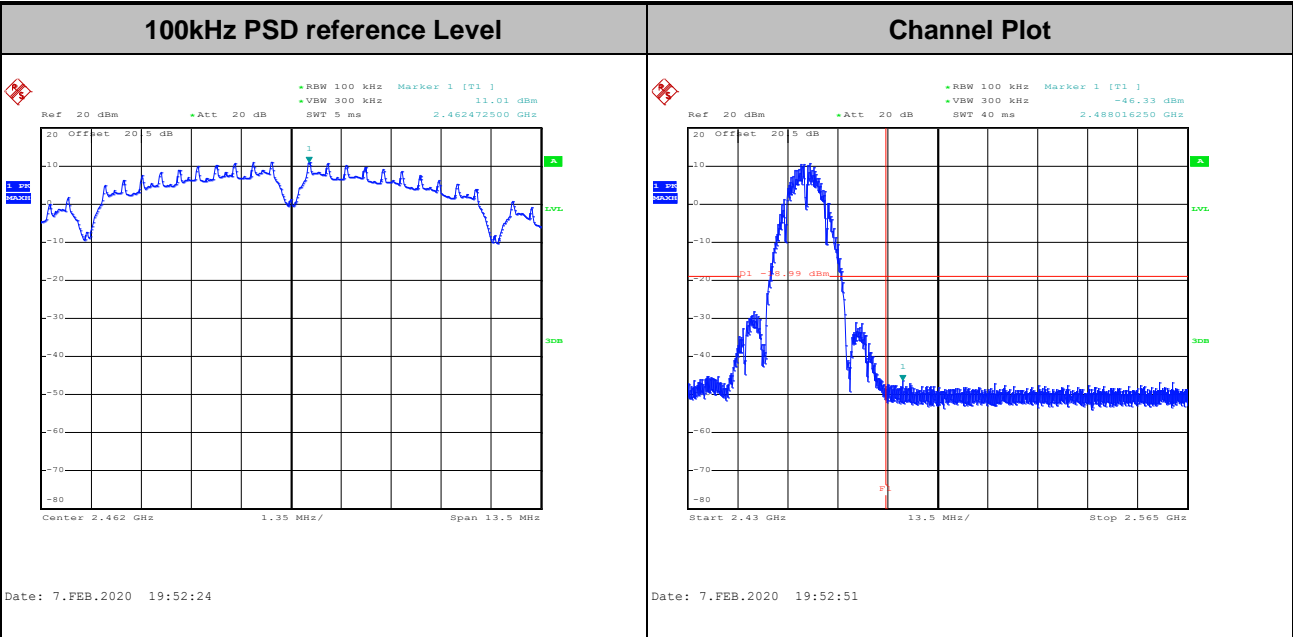





Test Mode :	802.11g	Test Channel :	01
-------------	---------	----------------	----

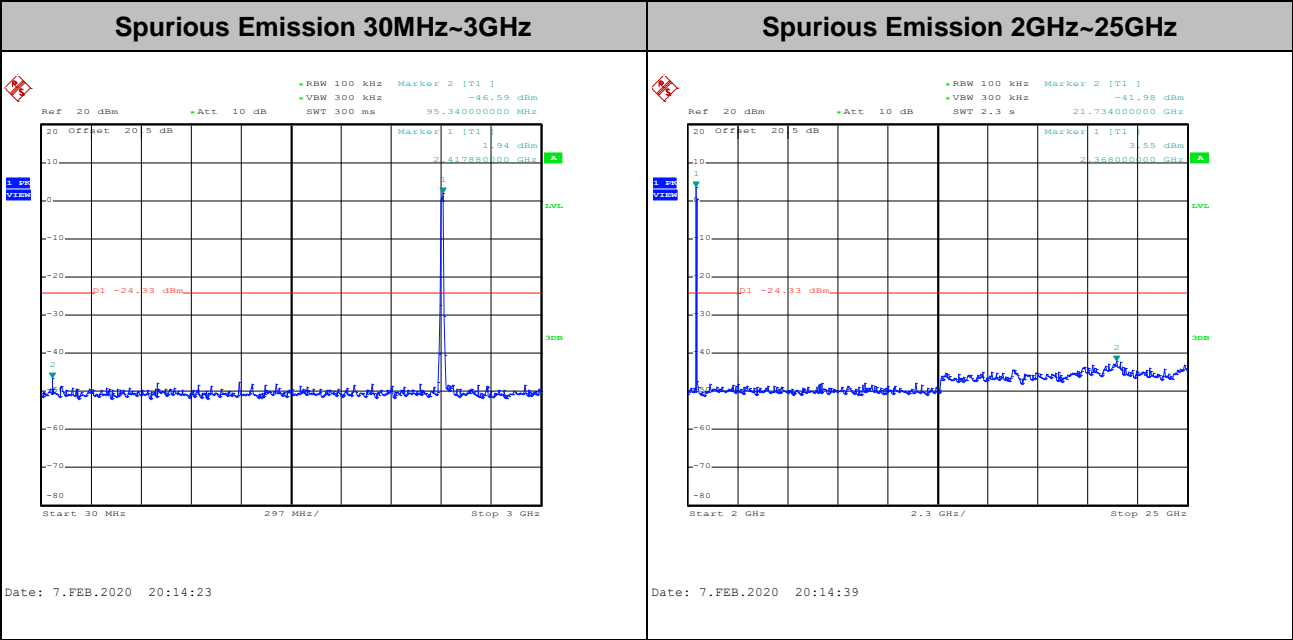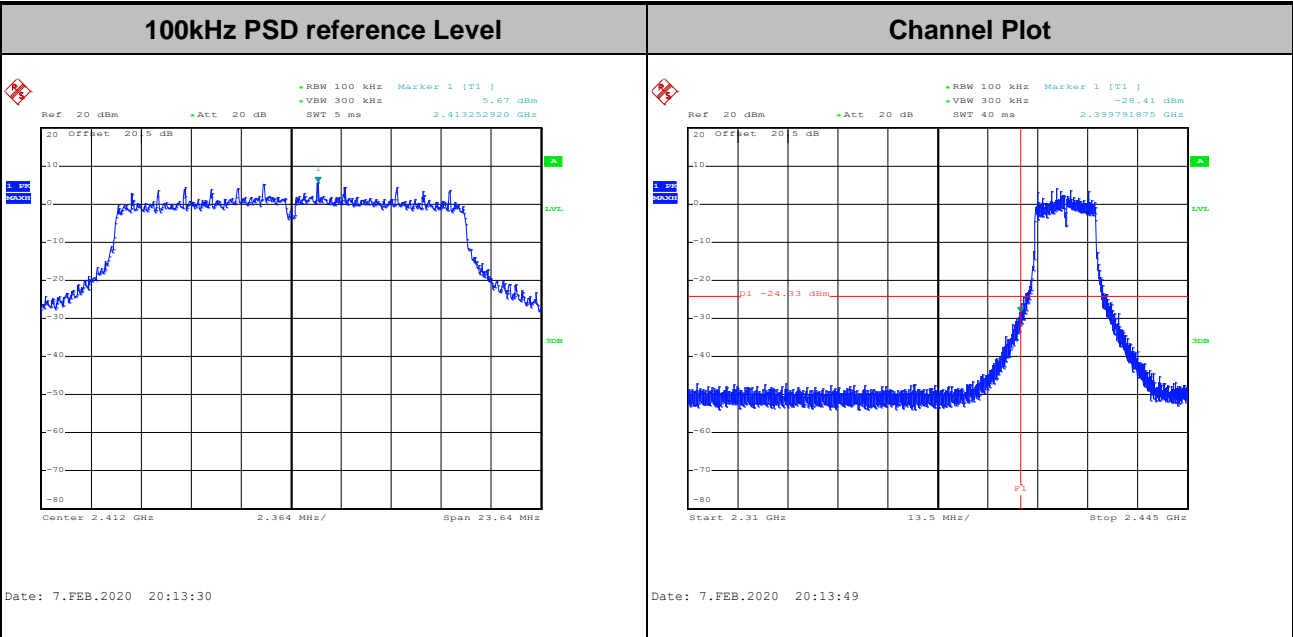







Test Mode :	802.11g	Test Channel :	06
-------------	---------	----------------	----

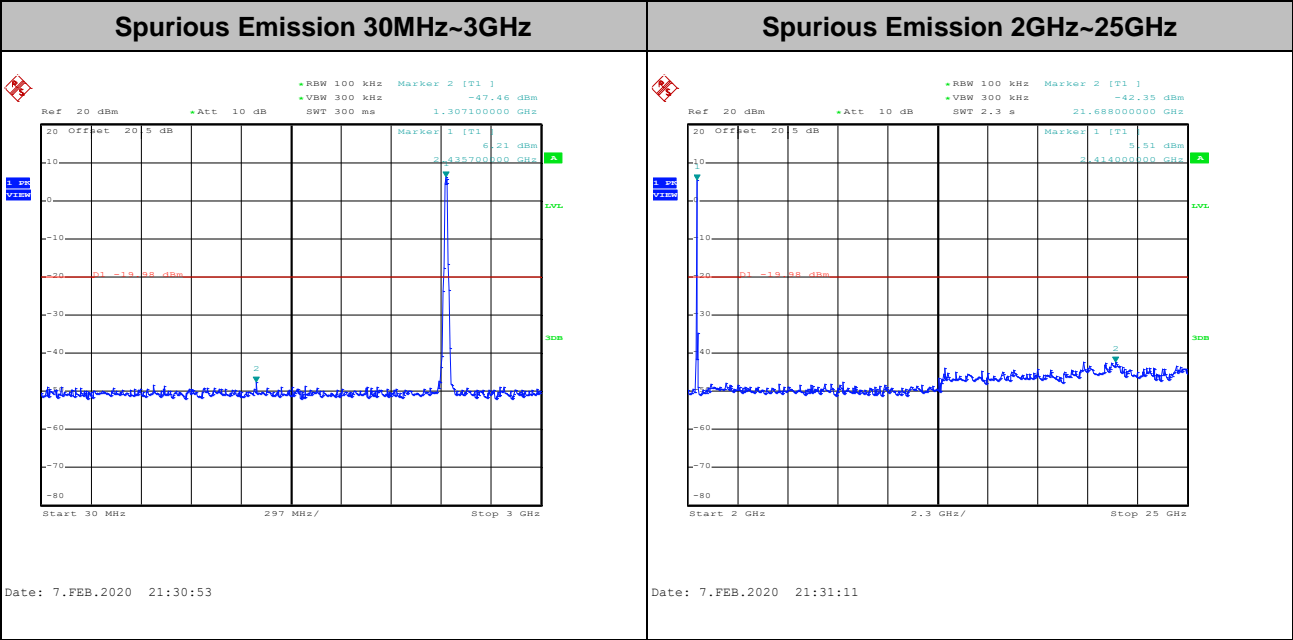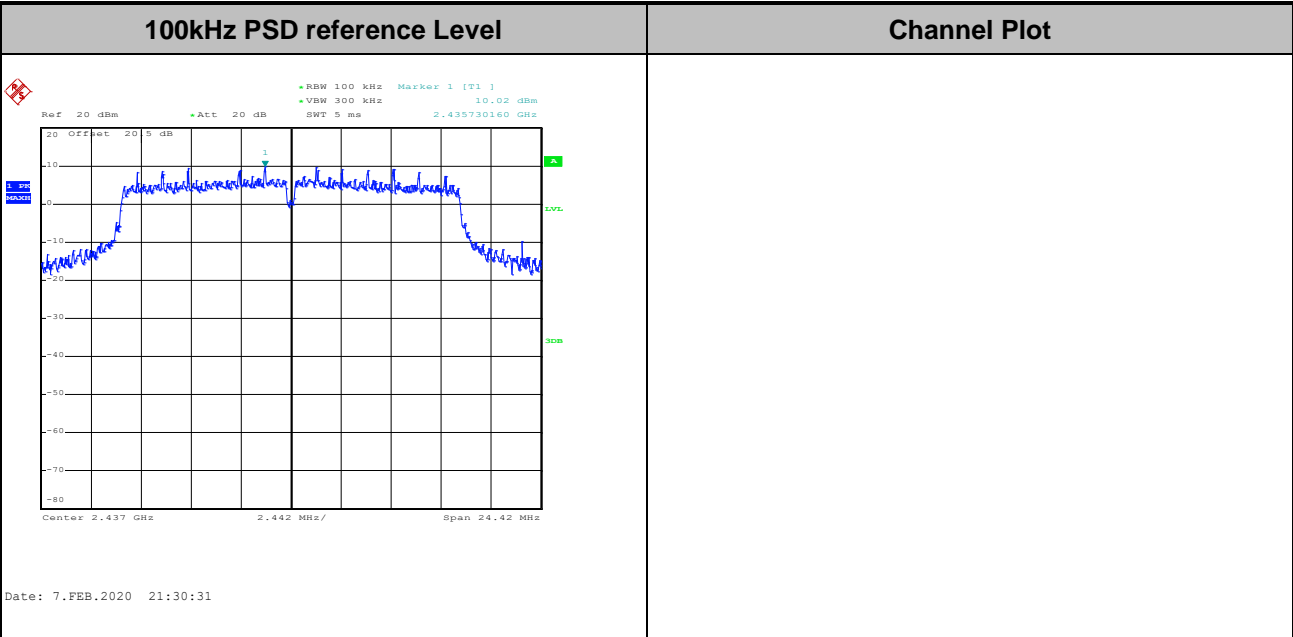







Test Mode :	802.11g	Test Channel :	11
-------------	---------	----------------	----

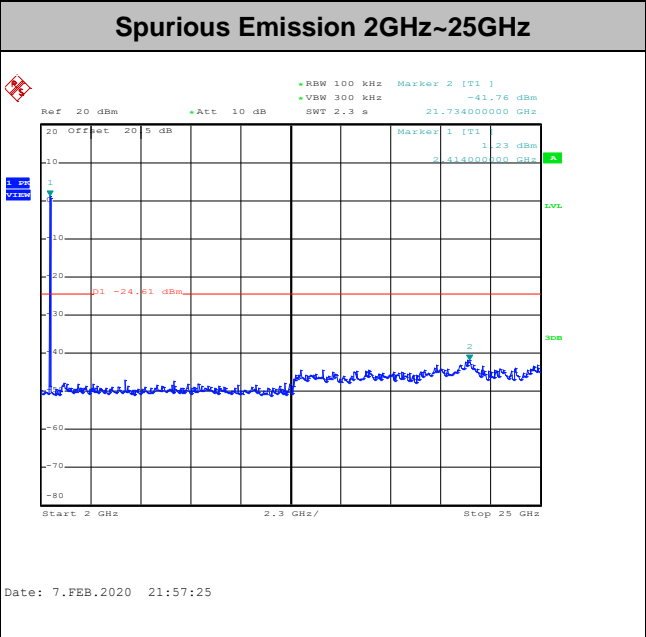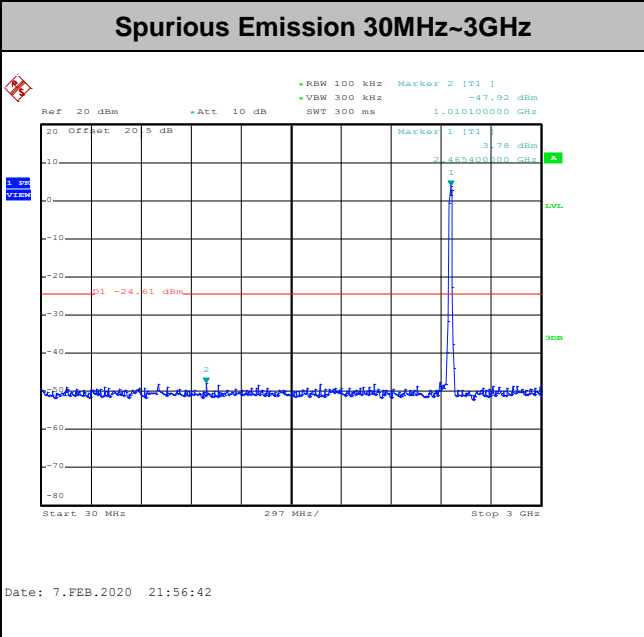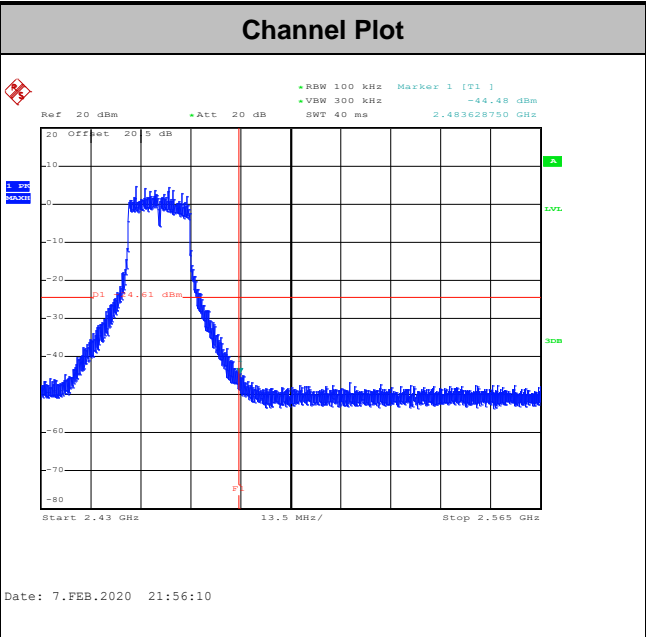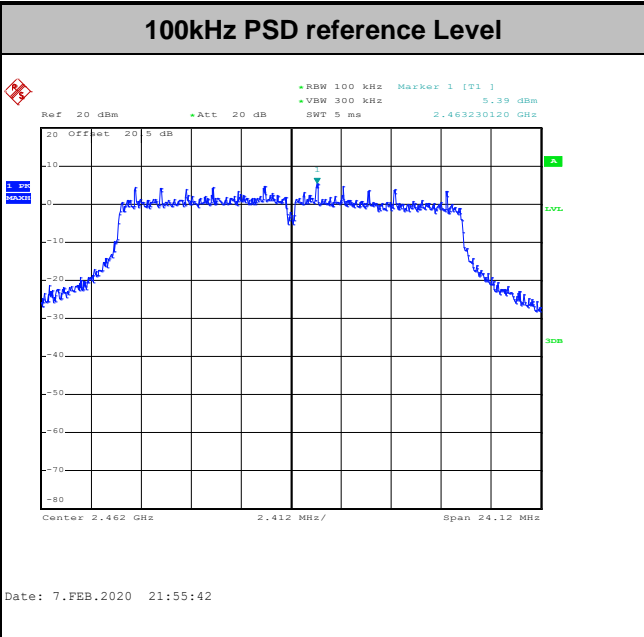





Test Mode : 802.11n HT20 Test Channel : 01

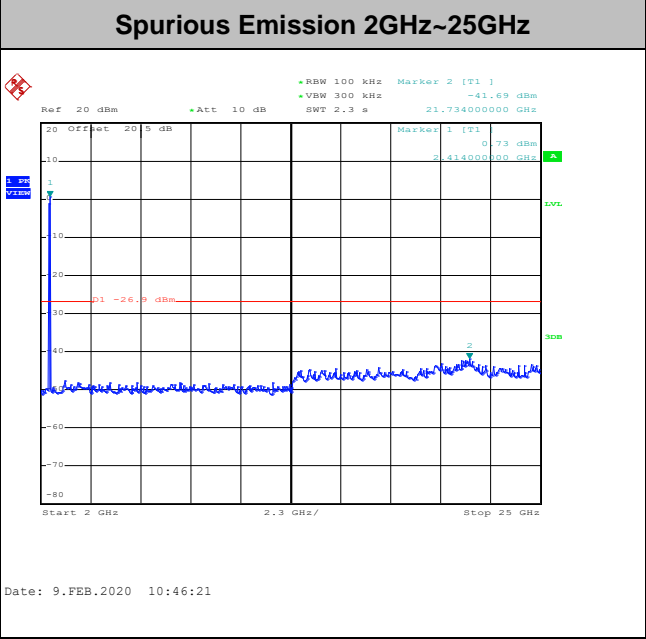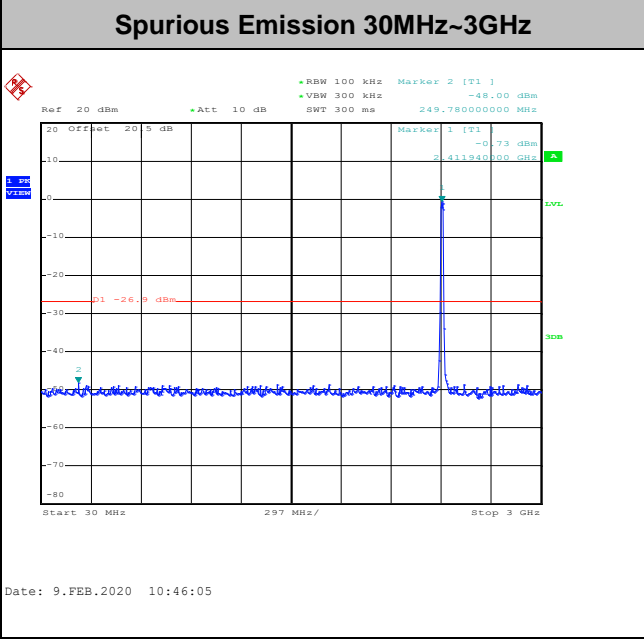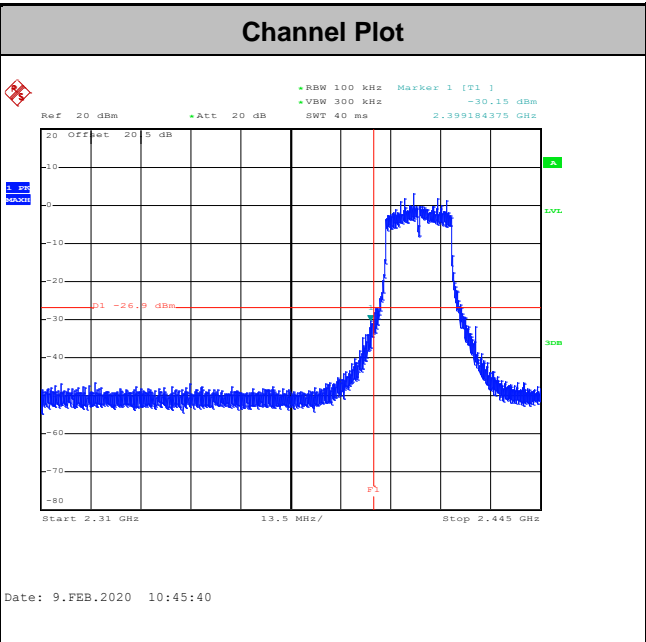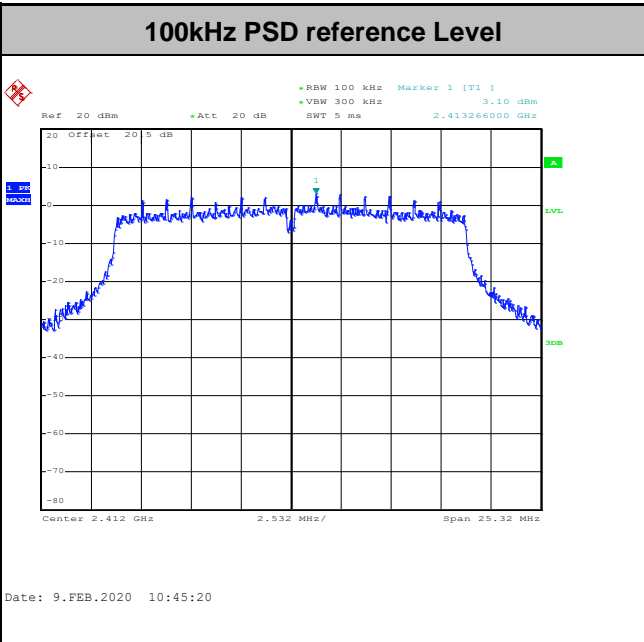





Test Mode :	802.11n HT20	Test Channel :	06
-------------	--------------	----------------	----

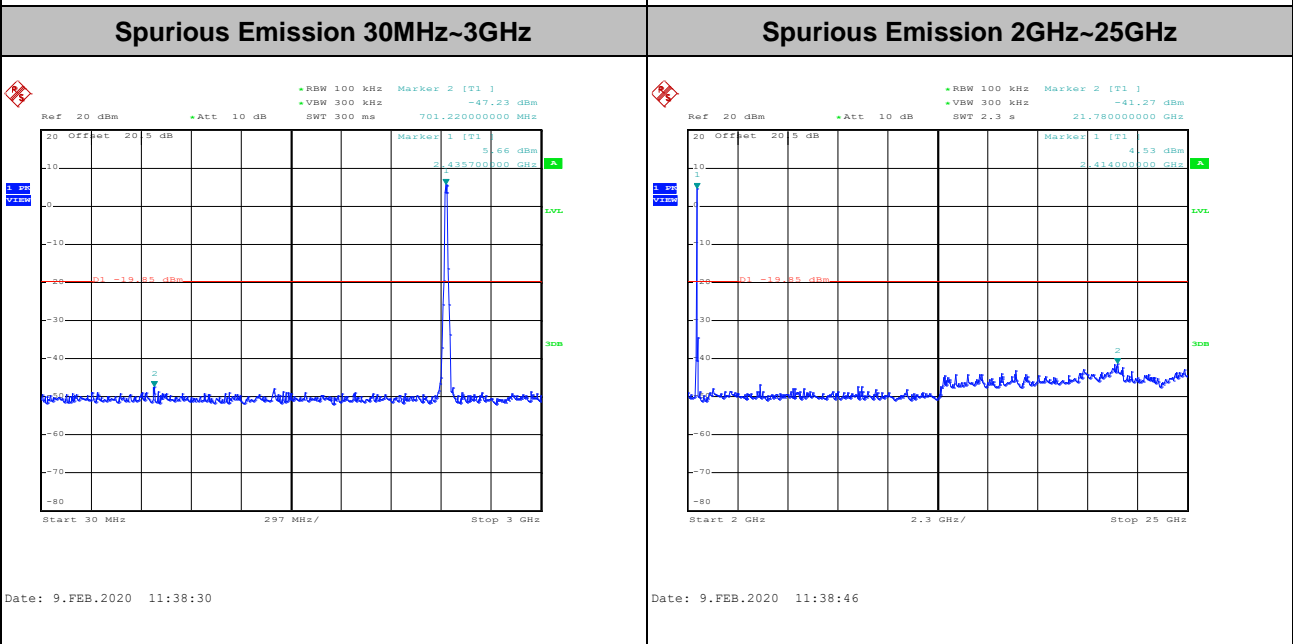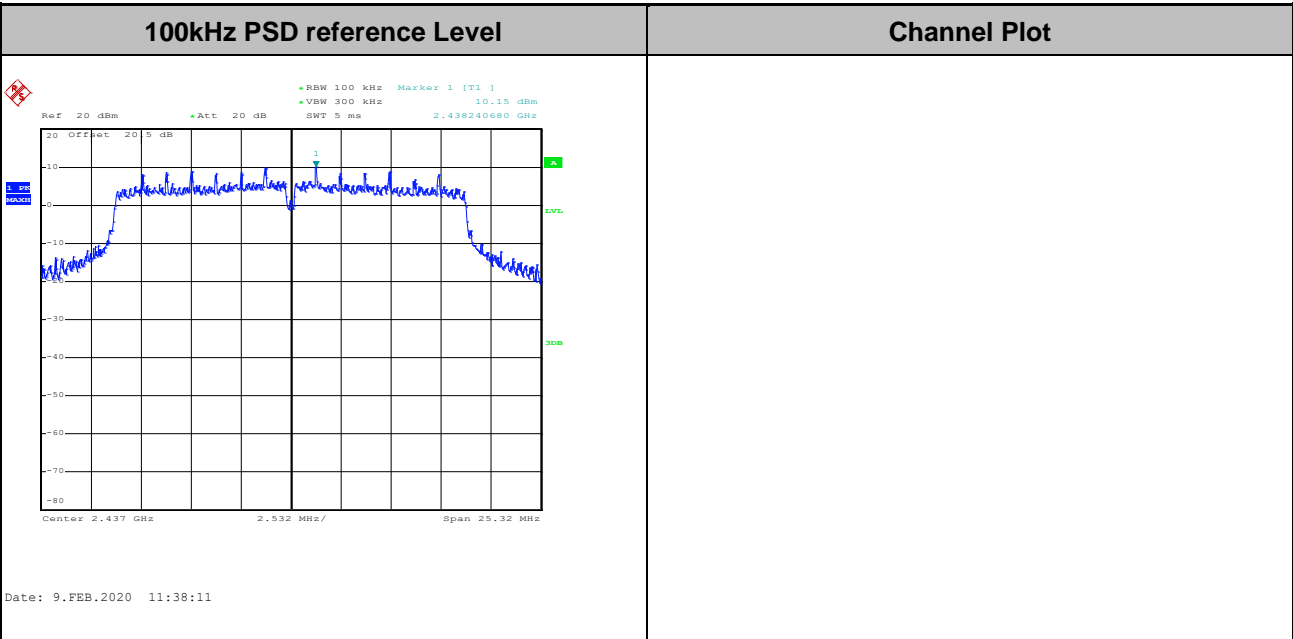





Test Mode :	802.11n HT20	Test Channel :	11
-------------	--------------	----------------	----

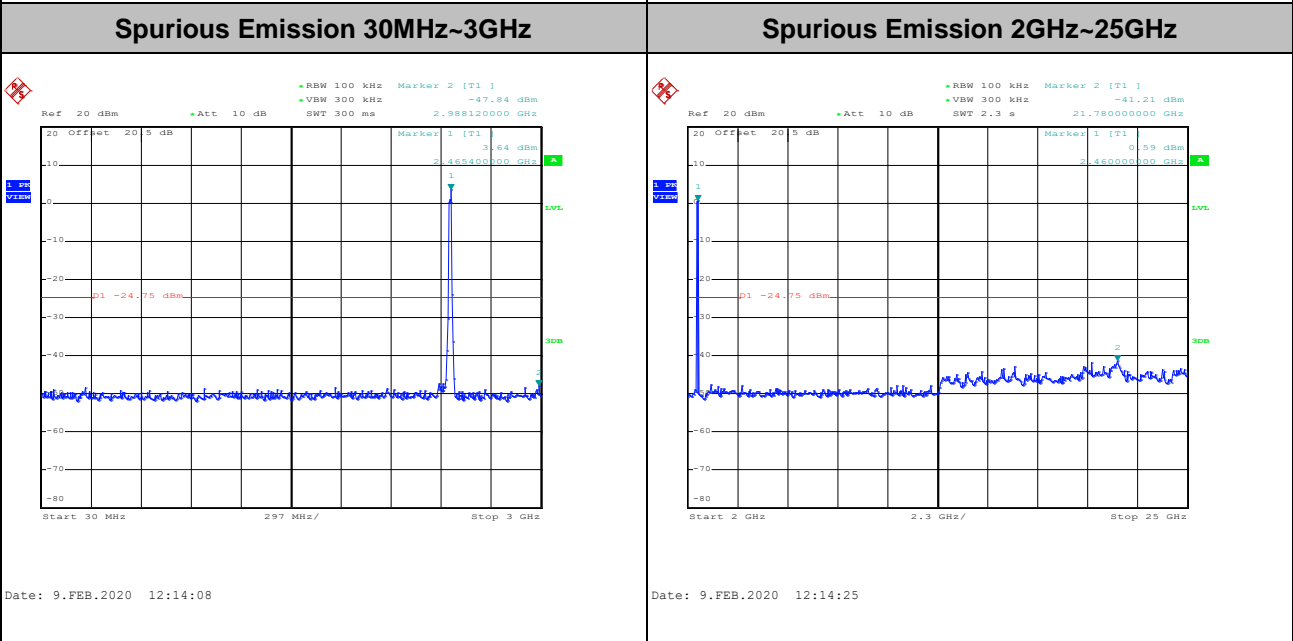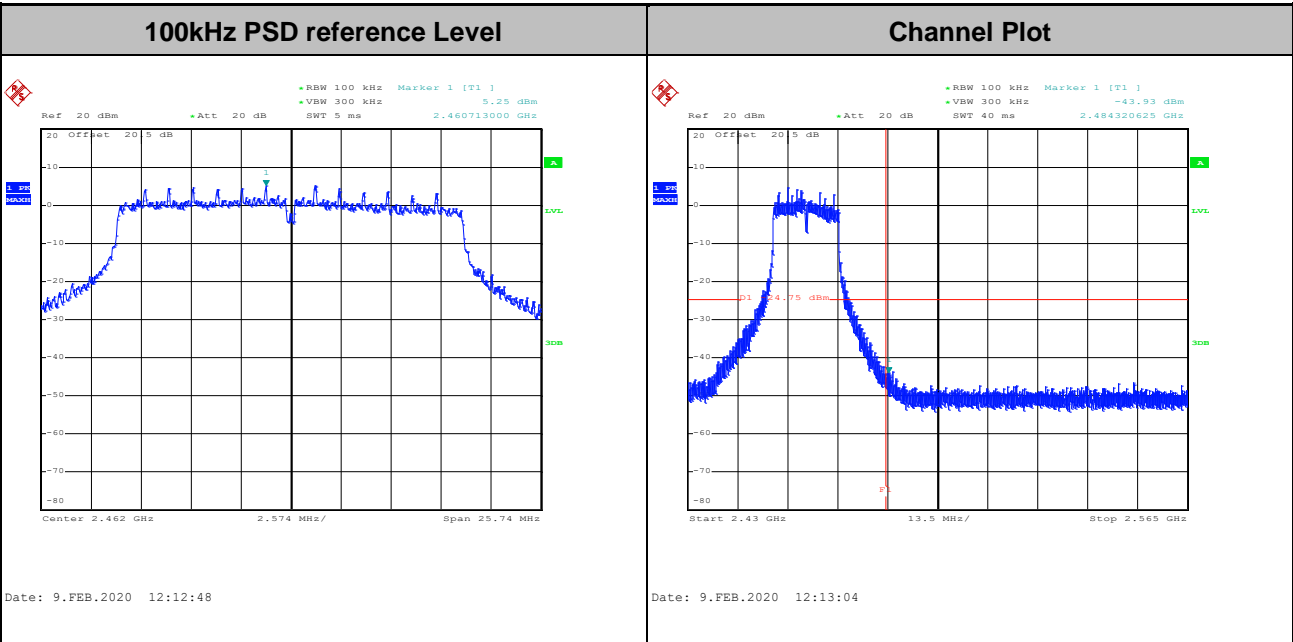





Number of TX = 2, Ant. 3 (Measured)

Test Mode :	802.11b	Test Channel :	01
-------------	---------	----------------	----

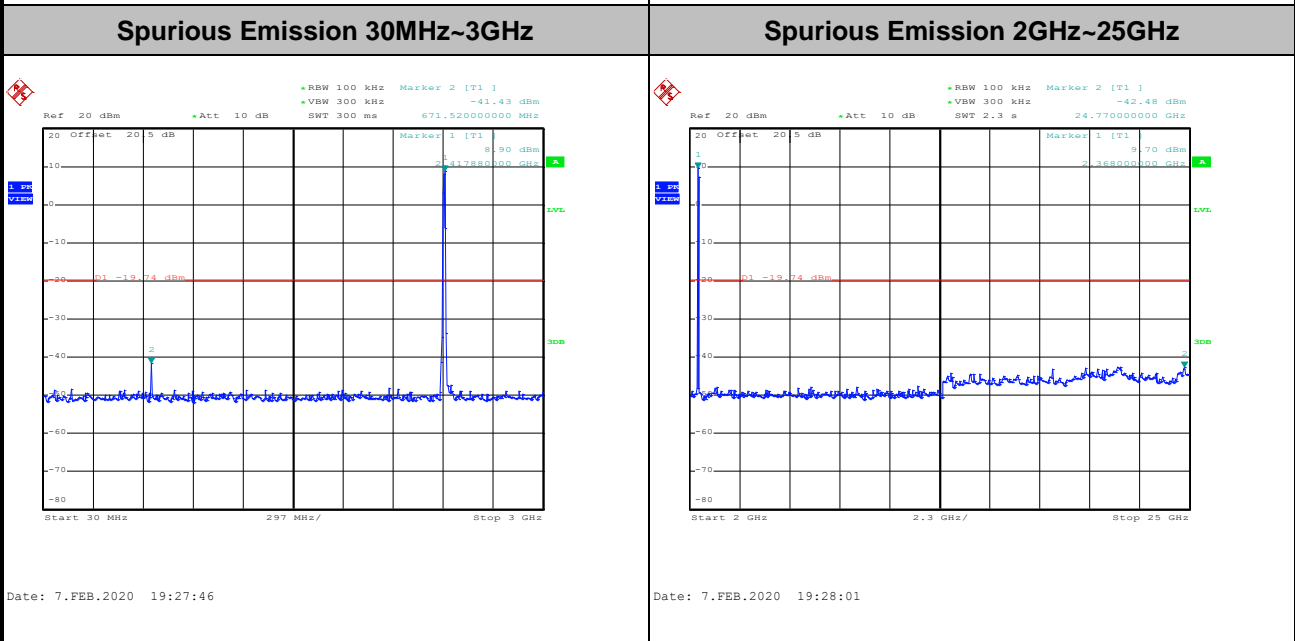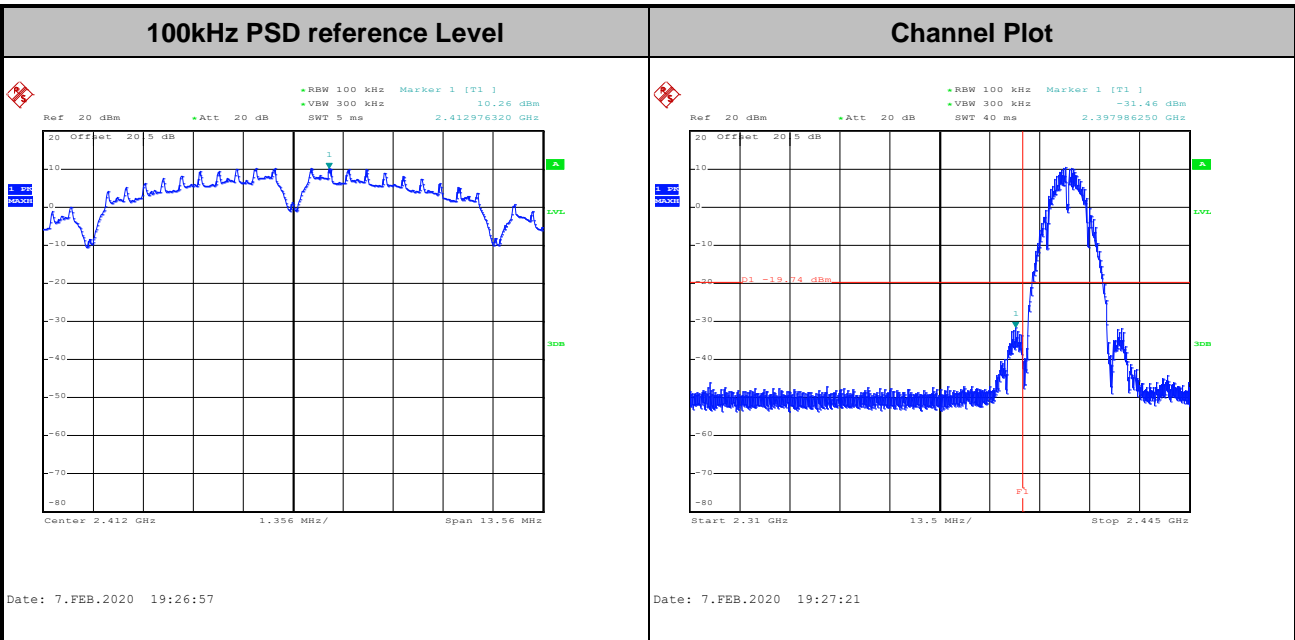




Test Mode :	802.11b	Test Channel :	06
-------------	---------	----------------	----

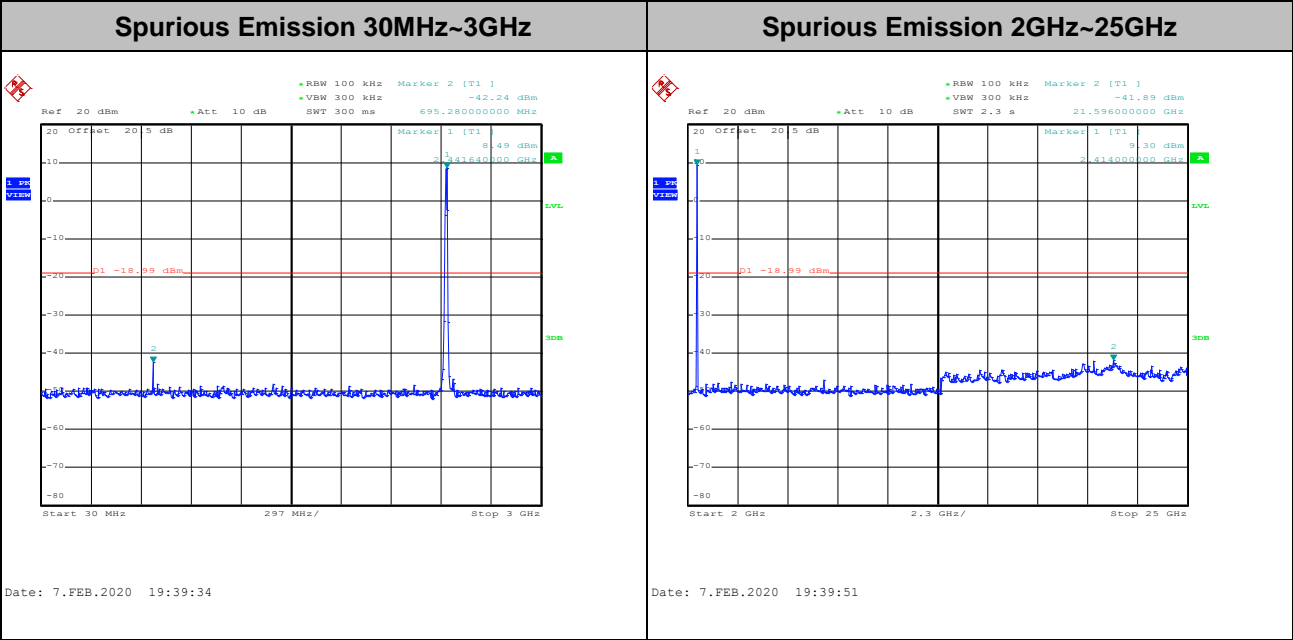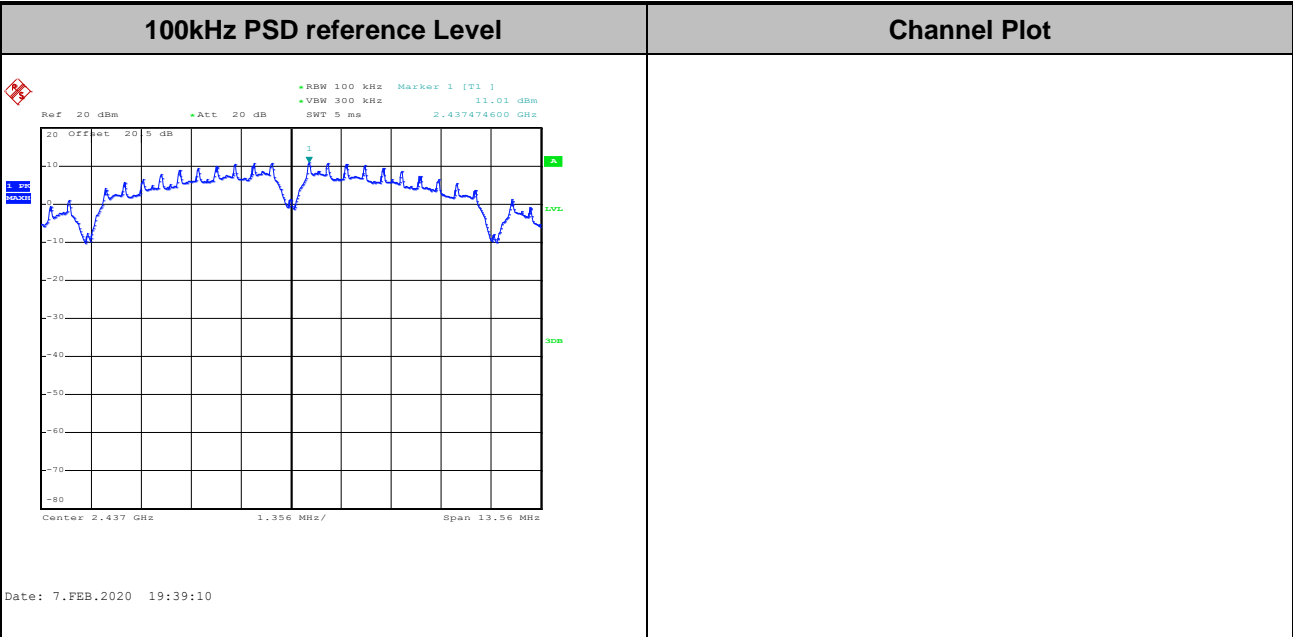







Test Mode :	802.11b	Test Channel :	11
-------------	---------	----------------	----

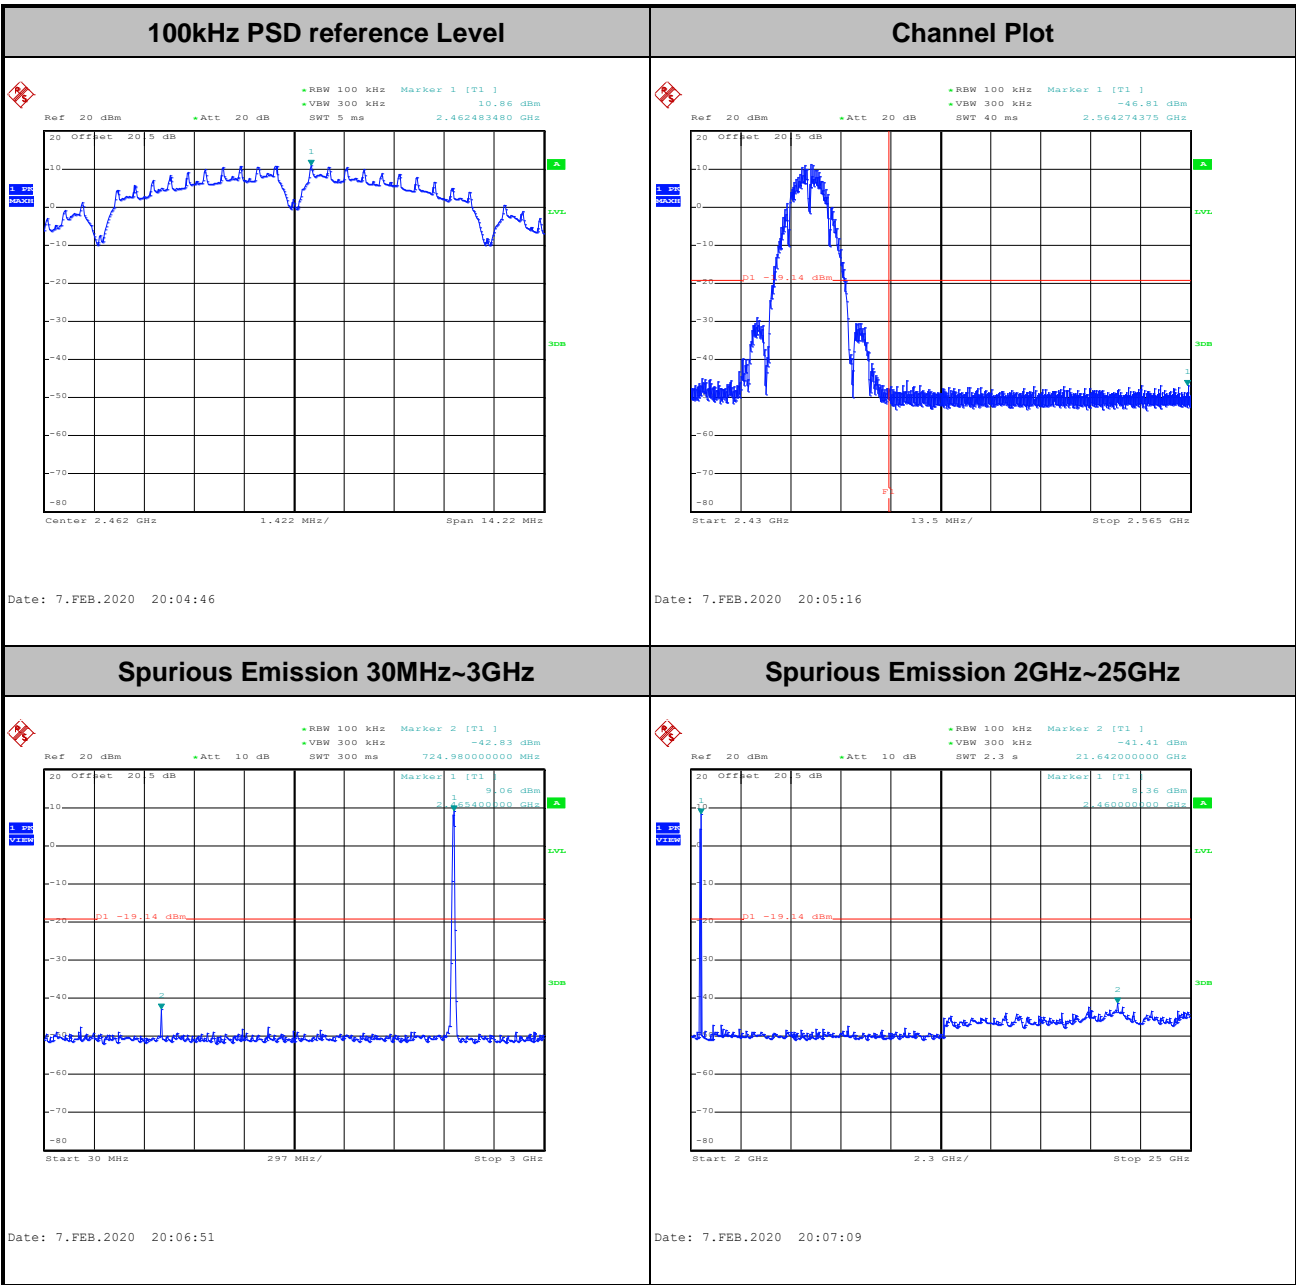





Test Mode : 802.11g Test Channel : 01

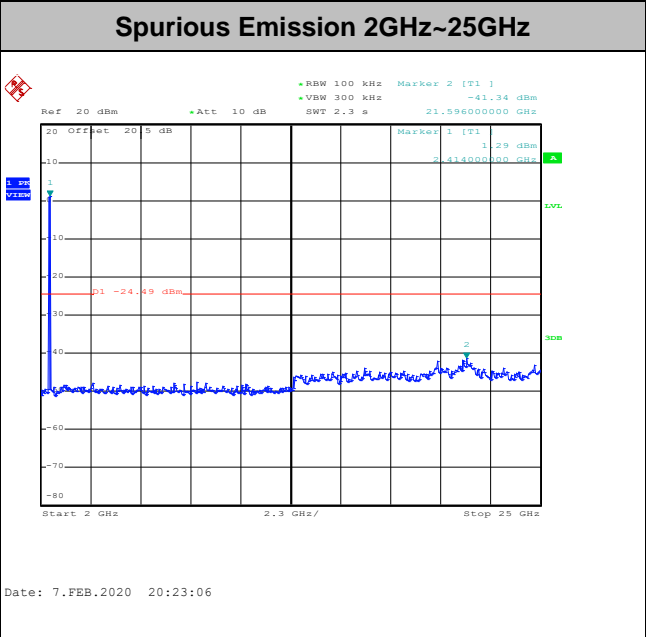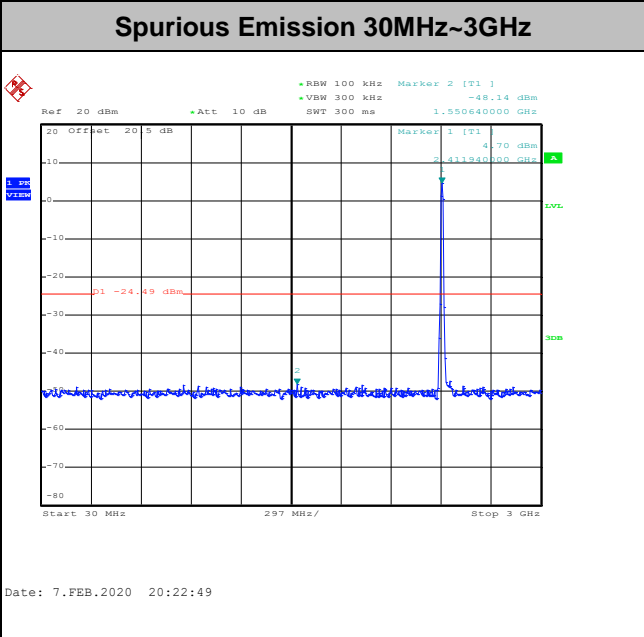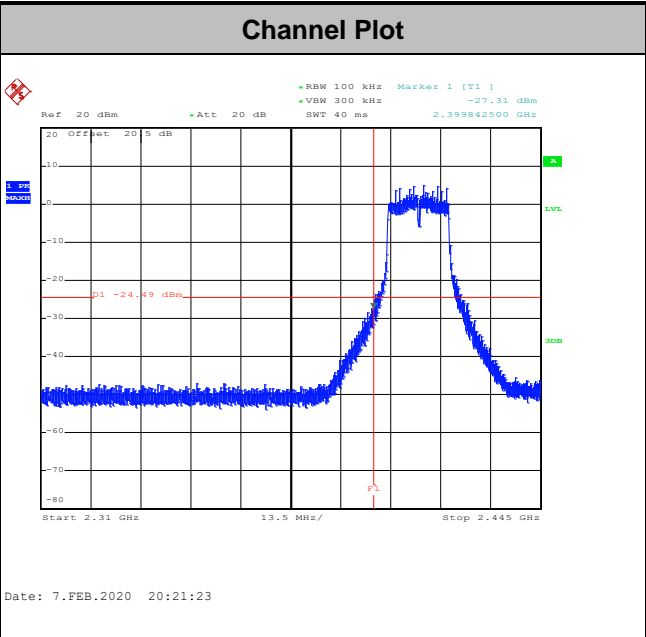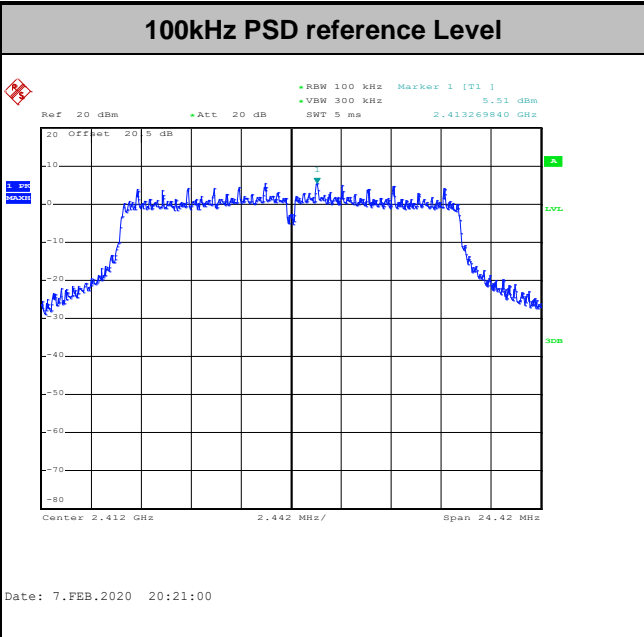





Test Mode :	802.11g	Test Channel :	06
-------------	---------	----------------	----

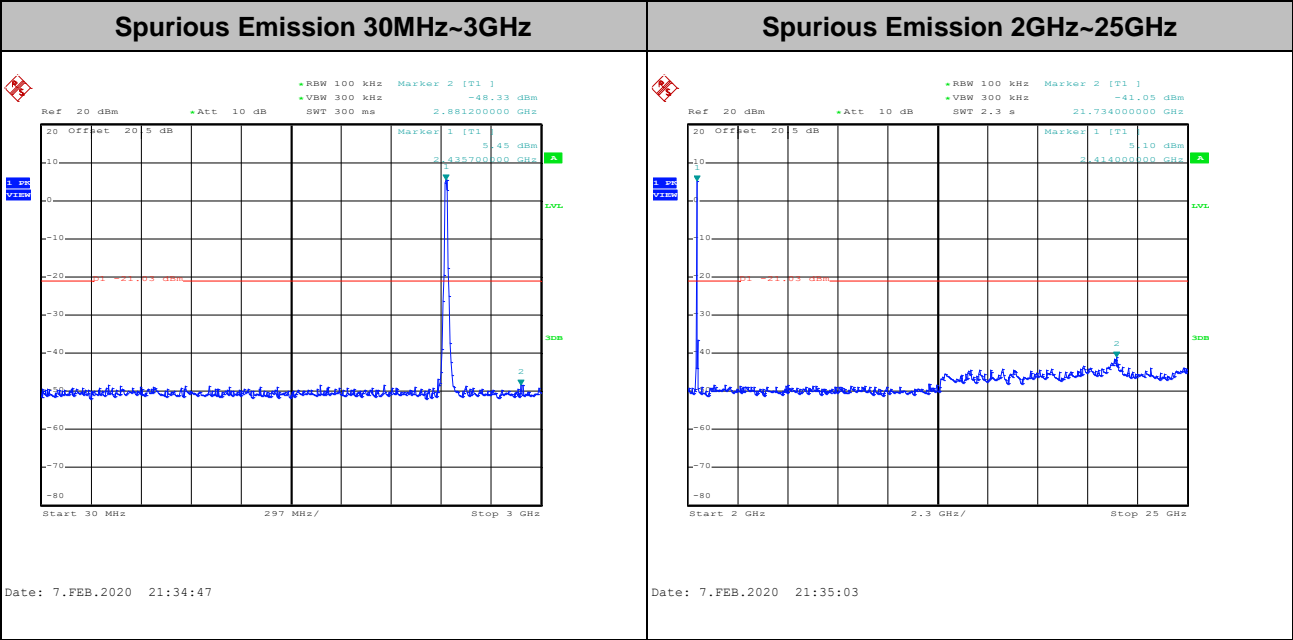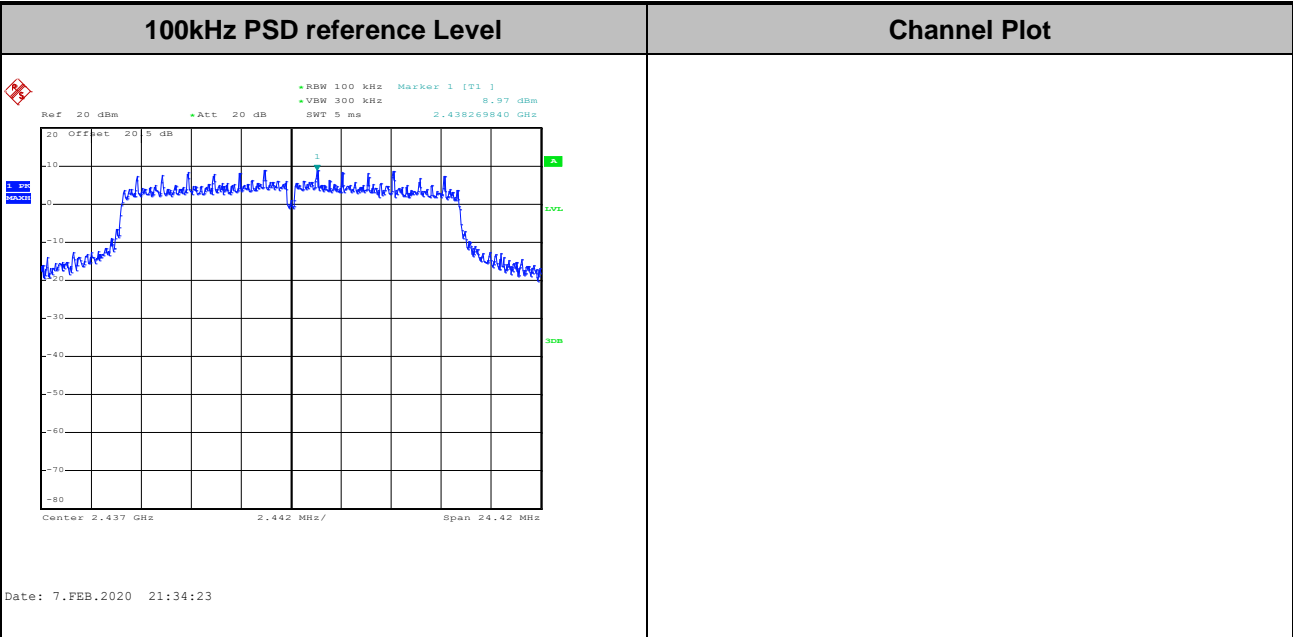





Test Mode :	802.11g	Test Channel :	11
-------------	---------	----------------	----

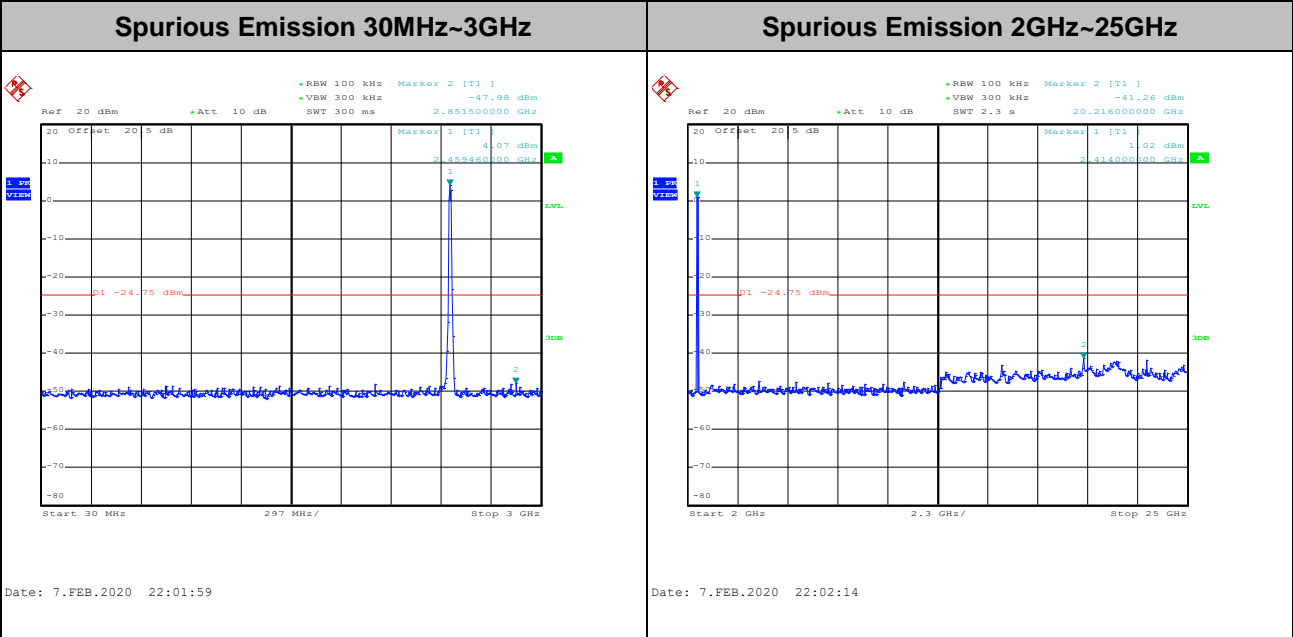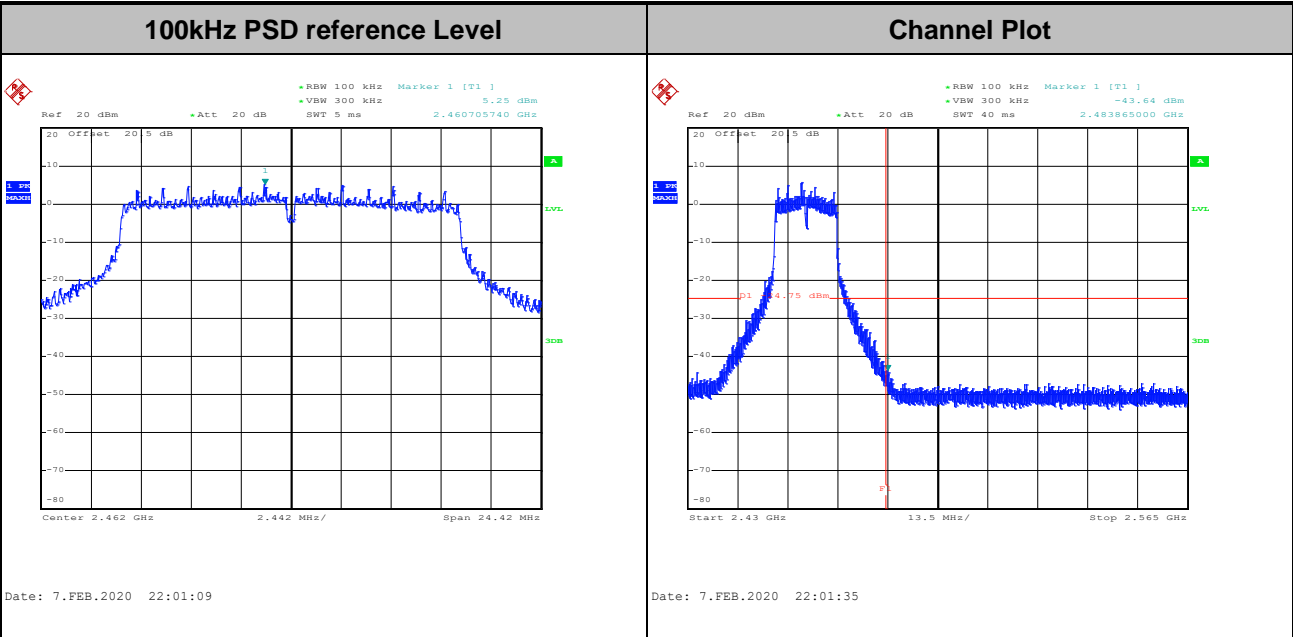





Test Mode :	802.11n HT20	Test Channel :	01
-------------	--------------	----------------	----

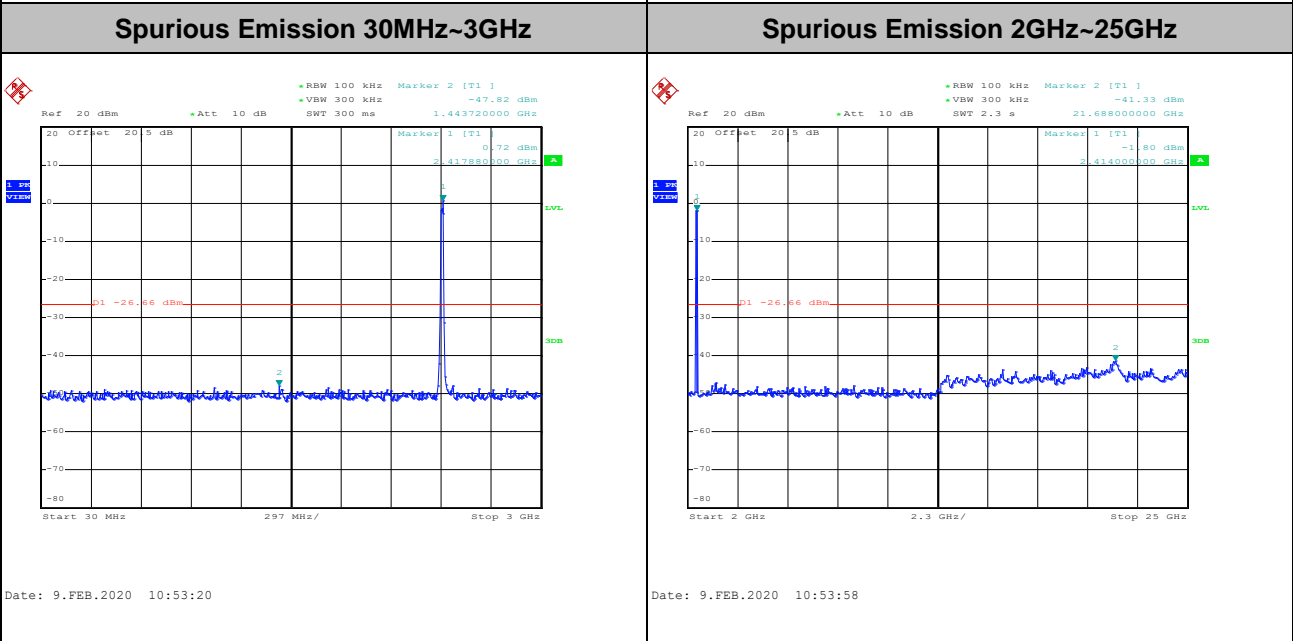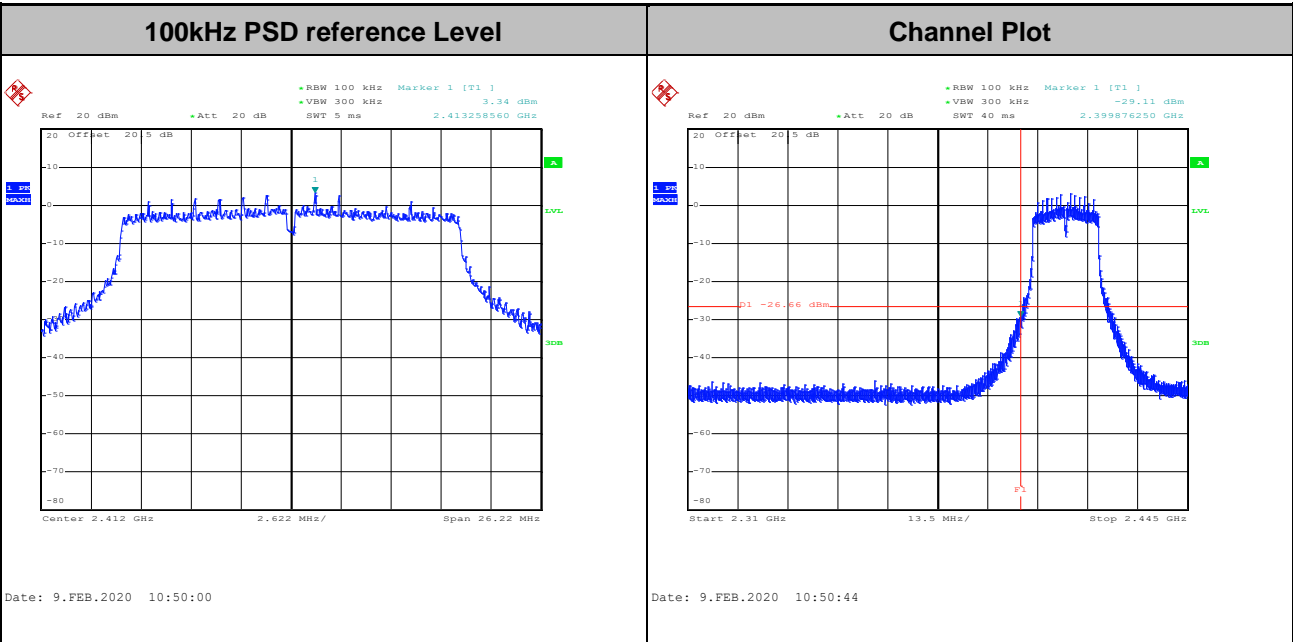





Test Mode :	802.11n HT20	Test Channel :	06
-------------	--------------	----------------	----

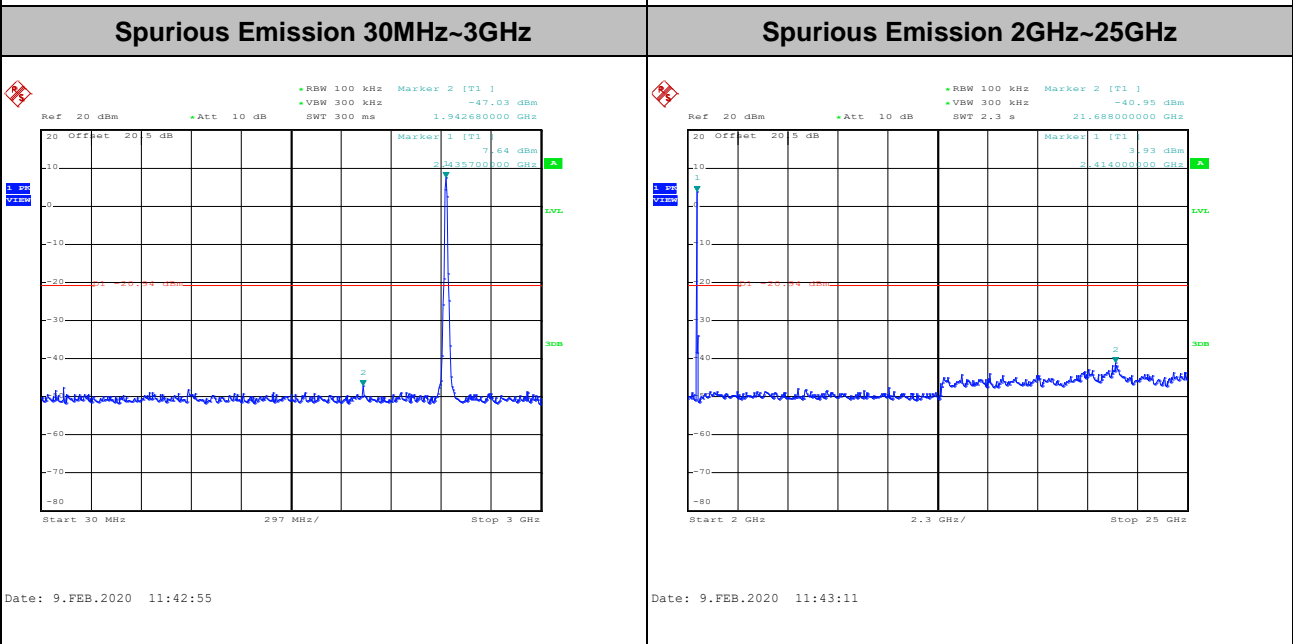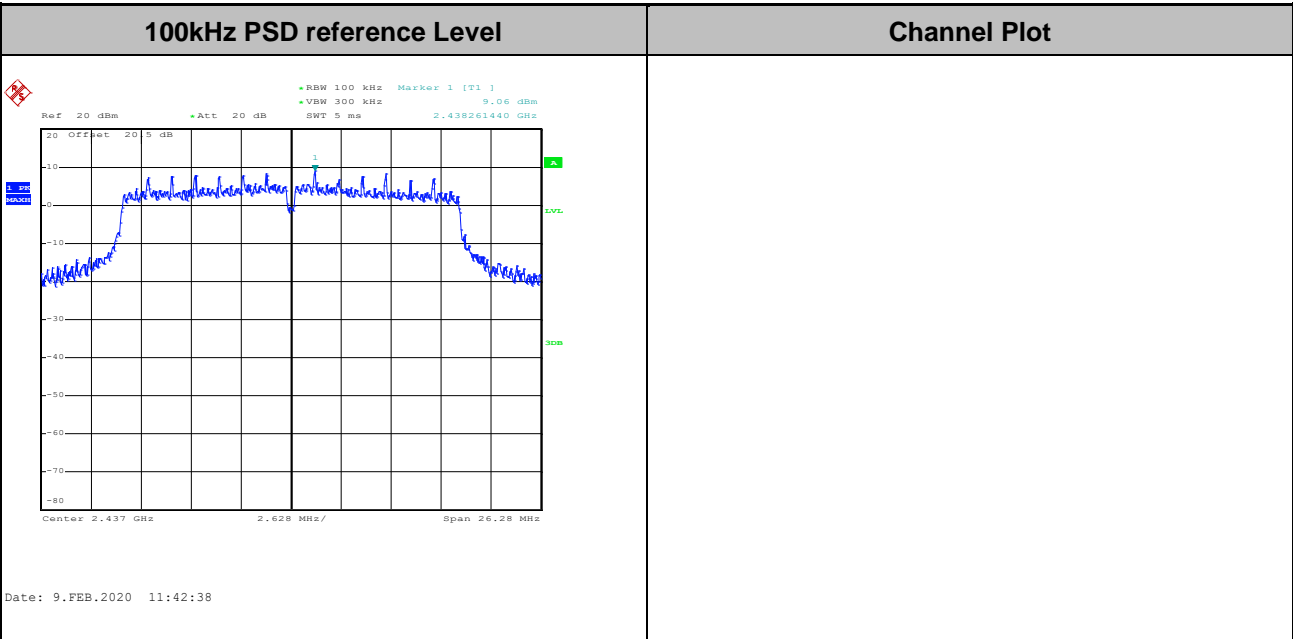



Test Mode :	802.11n HT20	Test Channel :	11
-------------	--------------	----------------	----

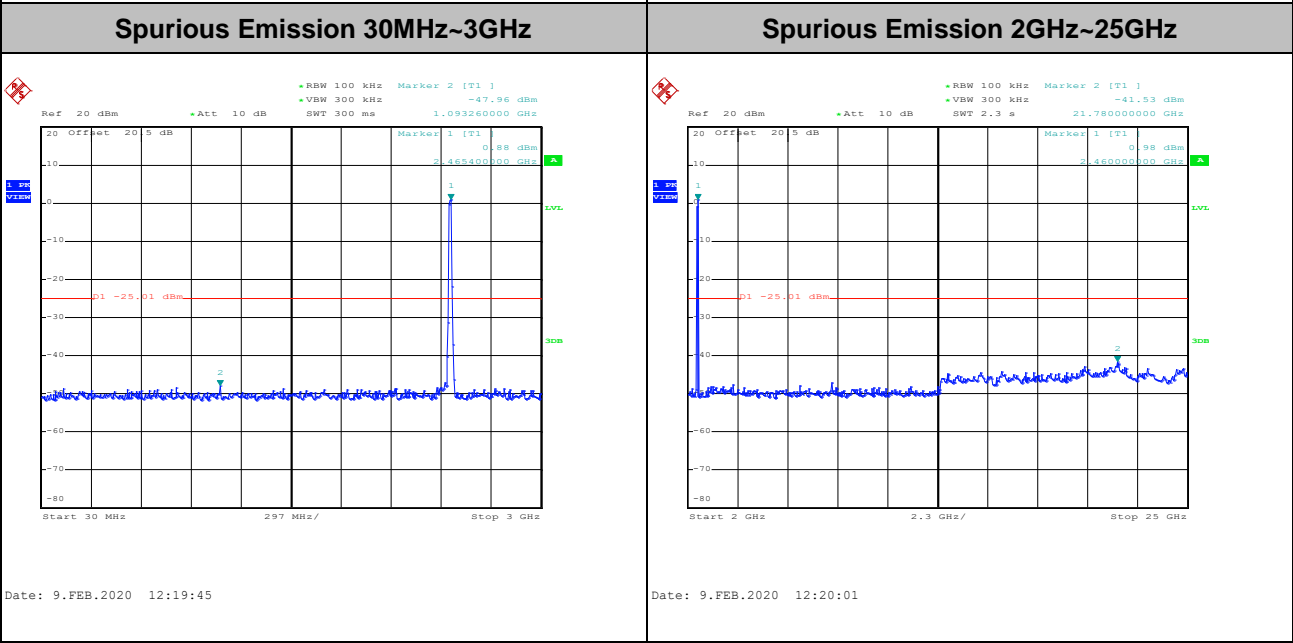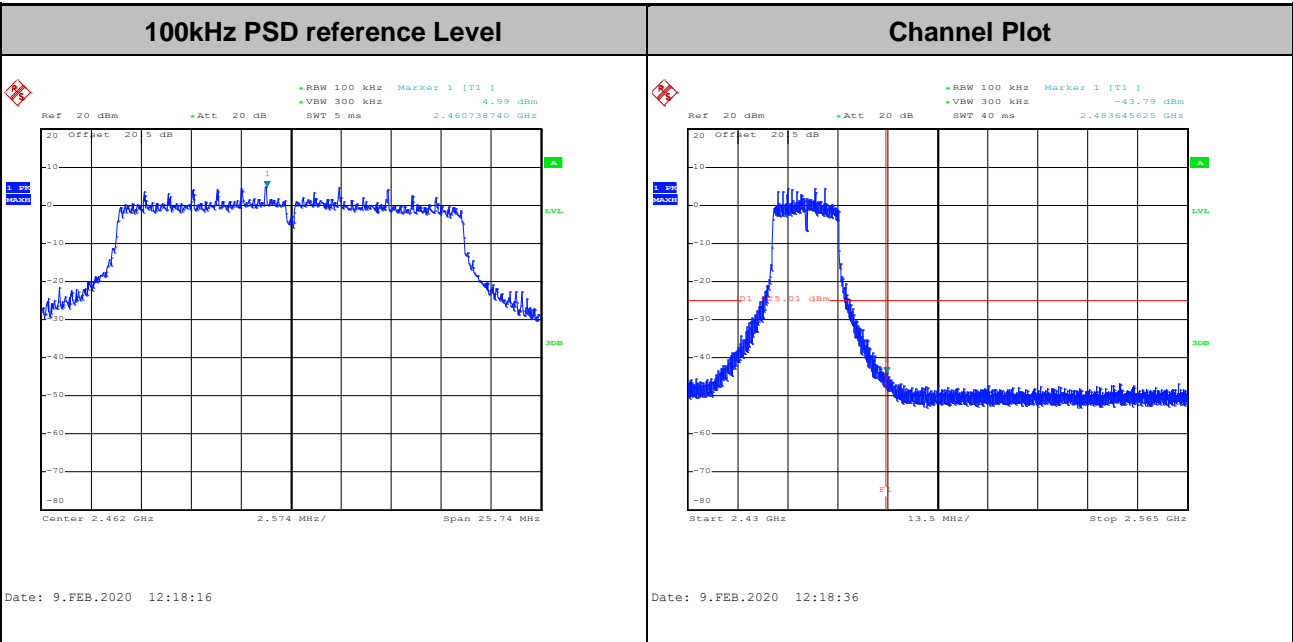



3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

See list of measuring equipment of this test report.




3.5.3 Test Procedures


1. The testing follows the ANSI C63.10 Section 11.12.1 Radiated emission measurements.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; $VBW \geq RBW$; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.
For average measurement:
 - $VBW = 10$ Hz, when duty cycle is no less than 98 percent.
 - $VBW \geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated emissions below 30MHz

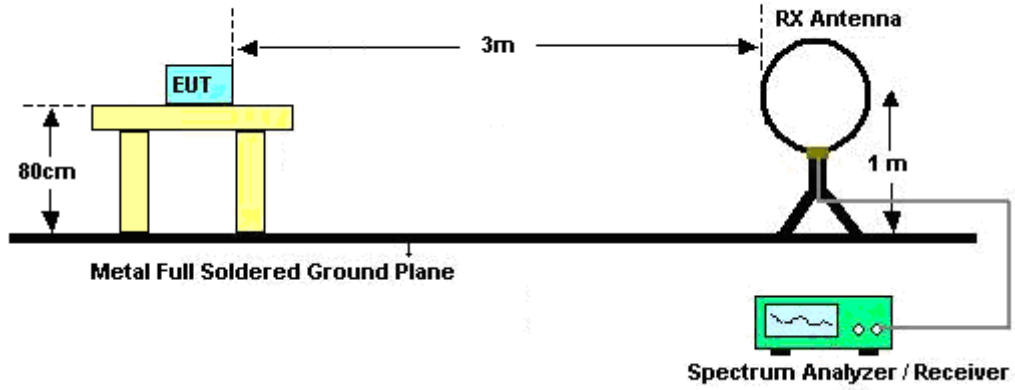

For radiated emissions from 30MHz to 1GHz

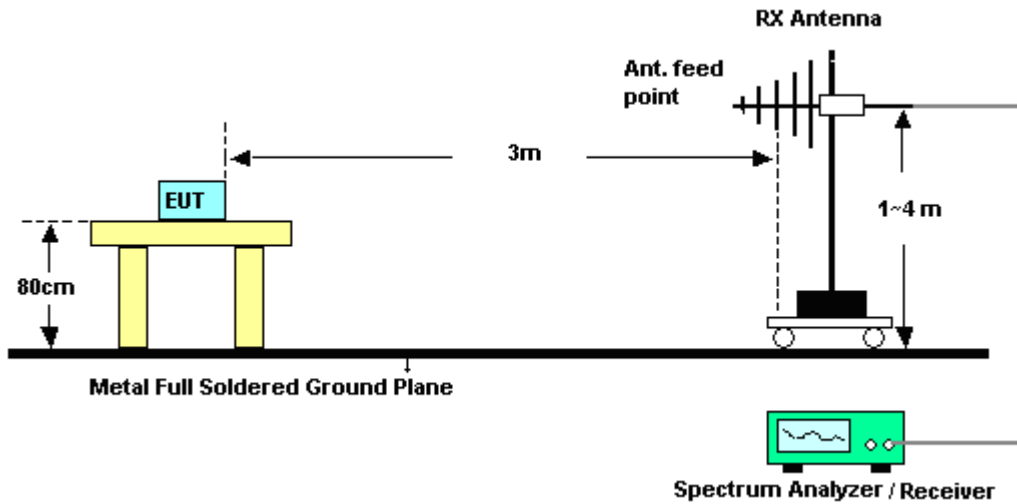

For radiated emissions above 1GHz

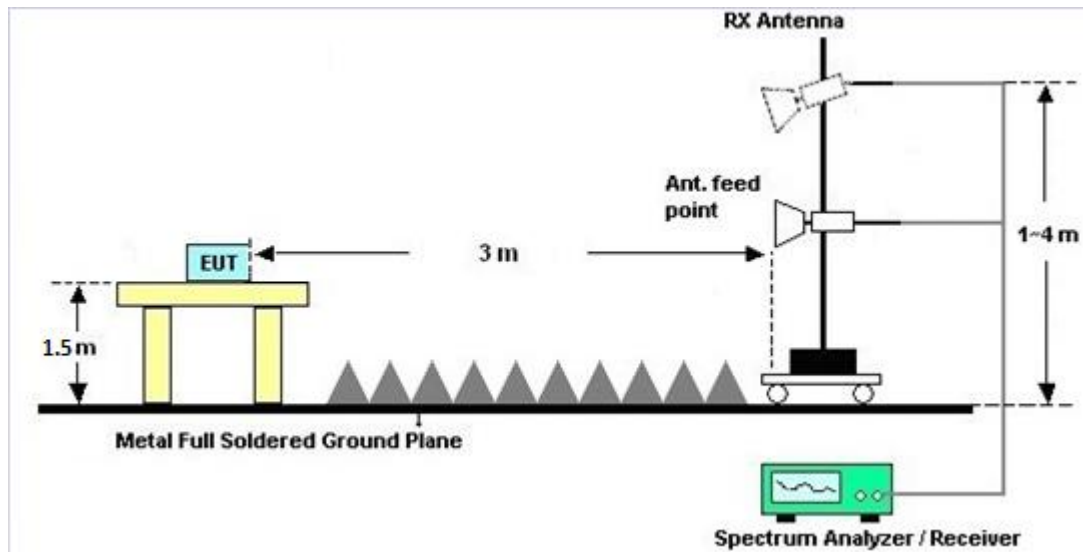

3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C and D.

3.5.7 Duty Cycle

Please refer to Appendix E.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix C and D.



3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

3.6.2 Measuring Instruments

See list of measuring equipment of this test report.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.

3.6.4 Test Setup



3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting Antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached Antenna or of an Antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

<CDD Modes >

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

For CDD transmissions, directional gain is calculated as

Directional gain = G_{ANT} + Array Gain, where Array Gain is as follows.

For power spectral density (PSD) measurements on all devices,

Array Gain = $10 \log(N_{ANT}/N_{SS}=1)$ dB.

For power measurements on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$.

Directional gain may be calculated by using the formulas applicable to equal gain antennas with G_{ANT} set equal to the gain of the antenna having the highest gain;

The EUT supports CDD mode.

For power, the directional gain G_{ANT} is set equal to the antenna having the highest gain, i.e., F)2)f)i).

For PSD, the directional gain calculation is following F)2)f)ii) of KDB 662911 D01 v02r01.

The power and PSD limit should be modified if the directional gain of EUT is over 6 dBi,

The directional gain "DG" is calculated as following table.

<CDD Modes>						
			DG for Power (dBi)	DG for PSD (dBi)	Power Limit Reduction (dB)	PSD Limit Reduction (dB)
	Ant. 4 (dBi)	Ant. 3 (dBi)				
2.4 GHz	0.50	-0.60	0.50	2.98	0.00	0.00

$Power\ Limit\ Reduction = DG(Power) - 6dBi, (min = 0)$

$PSD\ Limit\ Reduction = DG(PSD) - 6dBi, (min = 0)$



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Dec. 26, 2019	Jan. 23, 2020~ Feb. 17, 2020	Dec. 25, 2020	Radiation (03CH16-HY)
Bilog Antenna	TESEQ	CBL6111D&0 0802N1D01N- 06	47020&06	30MHz to 1GHz	Oct. 13, 2019	Jan. 23, 2020~ Feb. 17, 2020	Oct. 12, 2020	Radiation (03CH16-HY)
Horn Antenna	SCHWARZBE CK	BBHA 9120 D	9120D-152 2	1G~18GHz	Sep. 19, 2019	Jan. 23, 2020~ Feb. 17, 2020	Sep. 18, 2020	Radiation (03CH16-HY)
Amplifier	SONOMA	310N	371607	9kHz~1000MHz	Oct. 01, 2019	Jan. 23, 2020~ Feb. 17, 2020	Sep. 30, 2020	Radiation (03CH16-HY)
Preamplifier	Jet-Power	JPA0118-55-3 03	171000180 0054001	1GHz~18GHz	May 19, 2019	Jan. 23, 2020~ Feb. 17, 2020	May 18, 2020	Radiation (03CH16-HY)
Preamplifier	EMEC	EMC184045B	980192	18GHz ~40GHz	Jul. 10, 2019	Jan. 23, 2020~ Feb. 17, 2020	Jul. 09, 2020	Radiation (03CH16-HY)
Preamplifier	Keysight	83017A	MY532702 64	1GHz~26.5GHz	Dec. 11, 2019	Jan. 23, 2020~ Feb. 17, 2020	Dec.10, 2020	Radiation (03CH16-HY)
EMI Test Receiver	Keysight	N9038A (MXE)	MY554201 70	20MHz~8.4GHz	Mar. 08, 2019	Jan. 23, 2020~ Feb. 17, 2020	Mar. 07, 2020	Radiation (03CH16-HY)
Spectrum Analyzer	Agilent	E4446A	MY501801 36	3Hz~44GHz	Apr. 29, 2019	Jan. 23, 2020~ Feb. 17, 2020	Apr. 28, 2020	Radiation (03CH16-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY11680/ 4PE	30MHz~18GHz	Aug. 30, 2019	Jan. 23, 2020~ Feb. 17, 2020	Aug. 29, 2020	Radiation (03CH16-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY11688/ 4PE	30MHz~18GHz	Aug. 30, 2019	Jan. 23, 2020~ Feb. 17, 2020	Aug. 29, 2020	Radiation (03CH16-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	EC-A5-300 -5757	30MHz~18GHz	Aug. 30, 2019	Jan. 23, 2020~ Feb. 17, 2020	Aug. 29, 2020	Radiation (03CH16-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	505134/2	30MHz~40GHz	Feb. 26, 2019	Jan. 23, 2020~ Feb. 17, 2020	Feb. 25, 2020	Radiation (03CH16-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	800740/2	30MHz~40GHz	Feb. 26, 2019	Jan. 23, 2020~ Feb. 17, 2020	Feb. 25, 2020	Radiation (03CH16-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA 9170	BBHA9170 576	18GHz~40GHz	May 14, 2019	Jan. 23, 2020~ Feb. 17, 2020	May 13, 2020	Radiation (03CH16-HY)
Preamplifier	EMEC	EM18G40G	060715	18GHz~40GHz	Dec. 13, 2019	Jan. 23, 2020~ Feb. 17, 2020	Dec. 12, 2020	Radiation (03CH16-HY)
Hygrometer	TECPEL	DTM-303B	TP162965	N/A	Oct. 25, 2019	Jan. 23, 2020~ Feb. 17, 2020	Oct. 24, 2020	Radiation (03CH16-HY)
Software	Audix	E3 6.2009-8-24	RK-001136	N/A	N/A	Jan. 23, 2020~ Feb. 17, 2020	N/A	Radiation (03CH16-HY)
Filter	Wainwright	WLK4-1000-1 530-8000-40S S	SN11	1.53G Low Pass	Sep. 15, 2019	Jan. 23, 2020~ Feb. 17, 2020	Sep. 14, 2020	Radiation (03CH16-HY)
Filter	Wainwright	WHKX12-270 0-3000-18000 -60SS	SN3	3GHz High Pass Filter	Sep. 15, 2019	Jan. 23, 2020~ Feb. 17, 2020	Sep. 14, 2020	Radiation (03CH16-HY)



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Hygrometer	Testo	608-H2	41410069	N/A	Jun. 17, 2019	Jan. 24, 2020~ Mar. 13, 2020	Jun. 16, 2020	Conducted (TH05-HY)
Power Sensor	DARE	RPR3006W	16I00054S NO10	10MHz~6GHz	Dec. 23, 2019	Jan. 24, 2020~ Mar. 13, 2020	Dec. 22, 2020	Conducted (TH05-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP40	100055	9kHz-40GHz	Aug. 14, 2019	Jan. 24, 2020~ Mar. 13, 2020	Aug. 13, 2020	Conducted (TH05-HY)
Switch Control Manframe	E-IUSTRUMENT	ETF-1405-0	EC190006 7	N/A	Aug. 15, 2019	Jan. 24, 2020~ Mar. 13, 2020	Aug. 14, 2020	Conducted (TH05-HY)
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Jan. 27, 2020	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102388	9kHz~3.6GHz	Nov. 15, 2019	Jan. 27, 2020	Nov. 14, 2020	Conduction (CO05-HY)
Hygrometer	Testo	608-H1	34913912	N/A	Mar. 19, 2019	Jan. 27, 2020	Mar. 18, 2020	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100081	9kHz~30MHz	Nov. 15, 2019	Jan. 27, 2020	Nov. 14, 2020	Conduction (CO05-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	Jan. 27, 2020	N/A	Conduction (CO05-HY)
LF Cable	HUBER + SUHNER	RG-214/U	LF01	N/A	Jan. 02, 2020	Jan. 27, 2020	Jan. 01, 2021	Conduction (CO05-HY)
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100851	N/A	Jan. 02, 2020	Jan. 27, 2020	Jan. 01, 2021	Conduction (CO05-HY)



5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.0
---	-----

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.9
---	-----

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	6.7
---	-----

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.9
---	-----

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Owen Yang / Tommy Lee	Temperature:	21~25	°C
Test Date:	2020/1/24~2020/03/13	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

2.4GHz Band MIMO										
Mod.	Data Rate	N _{Tx}	CH.	Freq. (MHz)	99% Occupied BW (MHz)		6dB BW (MHz)		6dB BW Limit (MHz)	Pass/Fail
					Ant 4	Ant 3	Ant 4	Ant 3		
11b	1Mbps	2	1	2412	14.05	14.15	9.04	9.04	0.50	Pass
11b	1Mbps	2	6	2437	14.20	14.15	9.04	9.04	0.50	Pass
11b	1Mbps	2	11	2462	14.25	14.10	9.00	9.48	0.50	Pass
11g	6Mbps	2	1	2412	16.70	16.65	15.76	16.28	0.50	Pass
11g	6Mbps	2	6	2437	17.35	17.15	16.28	16.28	0.50	Pass
11g	6Mbps	2	11	2462	16.80	16.70	16.08	16.28	0.50	Pass
HT20	MCS0	2	1	2412	17.80	17.85	16.88	17.48	0.50	Pass
HT20	MCS0	2	6	2437	18.20	18.10	16.88	17.52	0.50	Pass
HT20	MCS0	2	11	2462	17.90	17.90	17.16	17.16	0.50	Pass

TEST RESULTS DATA
Average Output Power

2.4GHz Band Single Antenna																
Mod.	Data Rate	N _{Tx}	CH.	Freq. (MHz)	Average Conducted Power (dBm)			Conducted Power Limit (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)		Pass /Fail
					Ant 4	Ant 3	SUM	Ant 4	Ant 3	Ant 4	Ant 3	Ant 4	Ant 3	Ant 4	Ant 3	
11b	1Mbps	1	1	2412	19.60	-		30.00	-	0.50	-	20.10	-	36.00	-	Pass
11b	1Mbps	1	6	2437	19.80	-		30.00	-	0.50	-	20.30	-	36.00	-	Pass
11b	1Mbps	1	11	2462	19.60	-		30.00	-	0.50	-	20.10	-	36.00	-	Pass
11g	6Mbps	1	1	2412	15.10	-		30.00	-	0.50	-	15.60	-	36.00	-	Pass
11g	6Mbps	1	2	2417	16.70	-		30.00	-	0.50	-	17.20	-	36.00	-	Pass
11g	6Mbps	1	6	2437	19.50	-		30.00	-	0.50	-	20.00	-	36.00	-	Pass
11g	6Mbps	1	10	2457	16.10	-		30.00	-	0.50	-	16.60	-	36.00	-	Pass
11g	6Mbps	1	11	2462	15.00	-		30.00	-	0.50	-	15.50	-	36.00	-	Pass
HT20	MCS0	1	1	2412	14.60	-		30.00	-	0.50	-	15.10	-	36.00	-	Pass
HT20	MCS0	1	2	2417	15.20	-		30.00	-	0.50	-	15.70	-	36.00	-	Pass
HT20	MCS0	1	6	2437	19.30	-		30.00	-	0.50	-	19.80	-	36.00	-	Pass
HT20	MCS0	1	10	2457	15.20	-		30.00	-	0.50	-	15.70	-	36.00	-	Pass
HT20	MCS0	1	11	2462	14.30	-		30.00	-	0.50	-	14.80	-	36.00	-	Pass
VHT20	MCS0	1	1	2412	14.50	-		30.00	-	0.50	-	15.00	-	36.00	-	Pass
VHT20	MCS0	1	2	2417	15.10	-		30.00	-	0.50	-	15.60	-	36.00	-	Pass
VHT20	MCS0	1	6	2437	19.20	-		30.00	-	0.50	-	19.70	-	36.00	-	Pass
VHT20	MCS0	1	10	2457	15.10	-		30.00	-	0.50	-	15.60	-	36.00	-	Pass
VHT20	MCS0	1	11	2462	14.20	-		30.00	-	0.50	-	14.70	-	36.00	-	Pass

2.4GHz Band MIMO																
Mod.	Data Rate	N _{Tx}	CH.	Freq. (MHz)	Average Conducted Power (dBm)			Conducted Power Limit (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)		Pass /Fail
					Ant 4	Ant 3	SUM	Ant 4	Ant 3	Ant 4	Ant 3	Ant 4	Ant 3	Ant 4	Ant 3	
11b	1Mbps	2	1	2412	19.60	19.70	22.66	30.00		0.50		23.16		36.00	Pass	
11b	1Mbps	2	6	2437	20.00	19.60	22.81	30.00		0.50		23.31		36.00	Pass	
11b	1Mbps	2	11	2462	19.60	19.90	22.76	30.00		0.50		23.26		36.00	Pass	
11g	6Mbps	2	1	2412	15.40	15.30	18.36	30.00		0.50		18.86		36.00	Pass	
11g	6Mbps	2	2	2417	16.90	16.50	19.71	30.00		0.50		20.21		36.00	Pass	
11g	6Mbps	2	6	2437	19.50	19.60	22.56	30.00		0.50		23.06		36.00	Pass	
11g	6Mbps	2	10	2457	16.00	16.30	19.16	30.00		0.50		19.66		36.00	Pass	
11g	6Mbps	2	11	2462	15.10	15.00	18.06	30.00		0.50		18.56		36.00	Pass	
HT20	MCS0	2	1	2412	14.80	14.80	17.81	30.00		0.50		18.31		36.00	Pass	
HT20	MCS0	2	2	2417	15.80	15.30	18.57	30.00		0.50		19.07		36.00	Pass	
HT20	MCS0	2	6	2437	19.50	19.20	22.36	30.00		0.50		22.86		36.00	Pass	
HT20	MCS0	2	10	2457	15.30	15.30	18.31	30.00		0.50		18.81		36.00	Pass	
HT20	MCS0	2	11	2462	14.50	14.20	17.36	30.00		0.50		17.86		36.00	Pass	
VHT20	MCS0	2	1	2412	14.70	14.70	17.71	30.00		0.50		18.21		36.00	Pass	
VHT20	MCS0	2	2	2417	15.70	15.20	18.47	30.00		0.50		18.97		36.00	Pass	
VHT20	MCS0	2	6	2437	19.40	19.10	22.26	30.00		0.50		22.76		36.00	Pass	
VHT20	MCS0	2	10	2457	15.20	15.20	18.21	30.00		0.50		18.71		36.00	Pass	
VHT20	MCS0	2	11	2462	14.40	14.10	17.26	30.00		0.50		17.76		36.00	Pass	

Note: Measured power (dBm) has offset with cable loss.

TEST RESULTS DATA
Peak Power Spectral Density

2.4GHz Band MIMO												
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Peak PSD (dBm/3kHz)			DG (dBi)		Peak PSD Limit (dBm/3kHz)		Pass/Fail
					Ant 4	Ant 3	Worse + 3.01	Ant1	Ant2	Ant1	Ant2	
11b	1Mbps	2	1	2412	-3.81	-3.78	-0.77	2.98		8.00		Pass
11b	1Mbps	2	6	2437	-1.62	-3.63	1.39	2.98		8.00		Pass
11b	1Mbps	2	11	2462	-2.52	-2.90	0.49	2.98		8.00		Pass
11g	6Mbps	2	1	2412	-6.92	-9.32	-3.91	2.98		8.00		Pass
11g	6Mbps	2	6	2437	-4.64	-4.12	-1.11	2.98		8.00		Pass
11g	6Mbps	2	11	2462	-7.82	-8.44	-4.81	2.98		8.00		Pass
HT20	MCS0	2	1	2412	-11.93	-11.14	-8.13	2.98		8.00		Pass
HT20	MCS0	2	6	2437	-4.96	-5.81	-1.95	2.98		8.00		Pass
HT20	MCS0	2	11	2462	-9.14	-10.17	-6.13	2.98		8.00		Pass

Measured power density (dBm) has offset with cable loss.




Appendix B. AC Conducted Emission Test Results

Test Engineer :	Tom Lee	Temperature :	22~25°C
		Relative Humidity :	45~53%

EUT Information

Report NO : 9D0616-05
 Test Mode : Mode 1
 Test Voltage : 120Vac/60Hz
 Phase : Line

Full Spectrum

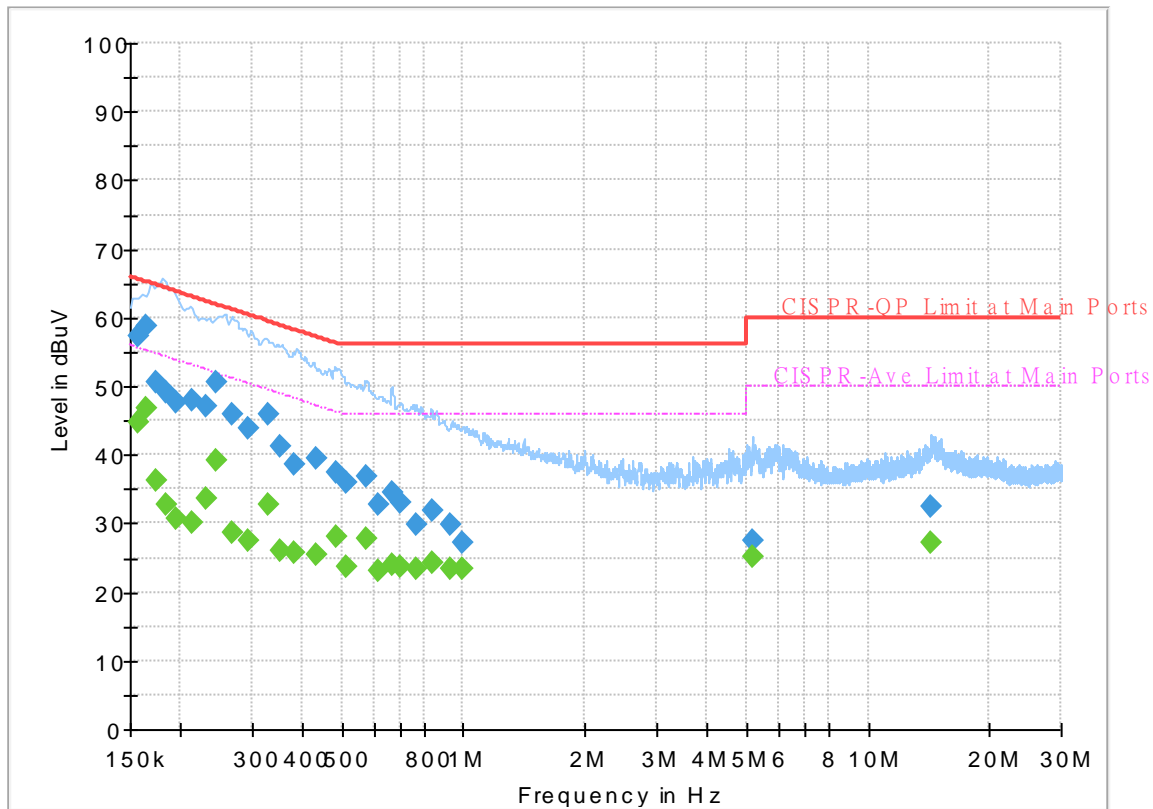

Final_Result


Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.157470	---	44.77	55.60	10.83	L1	OFF	19.5
0.157470	57.27	---	65.60	8.33	L1	OFF	19.5
0.163500	---	46.87	55.28	8.41	L1	OFF	19.5
0.163500	58.69	---	65.28	6.59	L1	OFF	19.5
0.174750	---	36.28	54.73	18.45	L1	OFF	19.5
0.174750	50.57	---	64.73	14.16	L1	OFF	19.5
0.183750	---	32.76	54.31	21.55	L1	OFF	19.5
0.183750	49.18	---	64.31	15.13	L1	OFF	19.5
0.195000	---	30.60	53.82	23.22	L1	OFF	19.5
0.195000	47.69	---	63.82	16.13	L1	OFF	19.5
0.212640	---	30.23	53.10	22.87	L1	OFF	19.5
0.212640	47.82	---	63.10	15.28	L1	OFF	19.5
0.231450	---	33.71	52.40	18.69	L1	OFF	19.5
0.231450	47.02	---	62.40	15.38	L1	OFF	19.5
0.244500	---	39.32	51.94	12.62	L1	OFF	19.5
0.244500	50.45	---	61.94	11.49	L1	OFF	19.5
0.268440	---	28.79	51.17	22.38	L1	OFF	19.5
0.268440	45.99	---	61.17	15.18	L1	OFF	19.5
0.294000	---	27.52	50.41	22.89	L1	OFF	19.5
0.294000	44.00	---	60.41	16.41	L1	OFF	19.5
0.329910	---	32.72	49.45	16.73	L1	OFF	19.5

0.329910	45.95	---	59.45	13.50	L1	OFF	19.5
0.352500	---	26.02	48.90	22.88	L1	OFF	19.5
0.352500	41.18	---	58.90	17.72	L1	OFF	19.5
0.384000	---	25.62	48.19	22.57	L1	OFF	19.5
0.384000	38.54	---	58.19	19.65	L1	OFF	19.5
0.431250	---	25.36	47.23	21.87	L1	OFF	19.5
0.431250	39.60	---	57.23	17.63	L1	OFF	19.5
0.485250	---	28.09	46.25	18.16	L1	OFF	19.5
0.485250	37.43	---	56.25	18.82	L1	OFF	19.5
0.512250	---	23.77	46.00	22.23	L1	OFF	19.5
0.512250	35.88	---	56.00	20.12	L1	OFF	19.5
0.573000	---	27.91	46.00	18.09	L1	OFF	19.5
0.573000	36.82	---	56.00	19.18	L1	OFF	19.5
0.613500	---	23.12	46.00	22.88	L1	OFF	19.5
0.613500	32.77	---	56.00	23.23	L1	OFF	19.5
0.669750	---	24.12	46.00	21.88	L1	OFF	19.5
0.669750	34.45	---	56.00	21.55	L1	OFF	19.5
0.702330	---	23.82	46.00	22.18	L1	OFF	19.5
0.702330	33.04	---	56.00	22.96	L1	OFF	19.5
0.768750	---	23.38	46.00	22.62	L1	OFF	19.6
0.768750	29.68	---	56.00	26.32	L1	OFF	19.6
0.833910	---	24.22	46.00	21.78	L1	OFF	19.6
0.833910	31.94	---	56.00	24.06	L1	OFF	19.6
0.933000	---	23.26	46.00	22.74	L1	OFF	19.6
0.933000	29.71	---	56.00	26.29	L1	OFF	19.6
0.999420	---	23.44	46.00	22.56	L1	OFF	19.6
0.999420	27.27	---	56.00	28.73	L1	OFF	19.6
5.167500	---	25.06	50.00	24.94	L1	OFF	19.8
5.167500	27.42	---	60.00	32.58	L1	OFF	19.8
14.370000	---	27.20	50.00	22.80	L1	OFF	20.1
14.370000	32.46	---	60.00	27.54	L1	OFF	20.1

EUT Information

Report NO : 9D0616-05
 Test Mode : Mode 1
 Test Voltage : 120Vac/60Hz
 Phase : Neutral

Full Spectrum

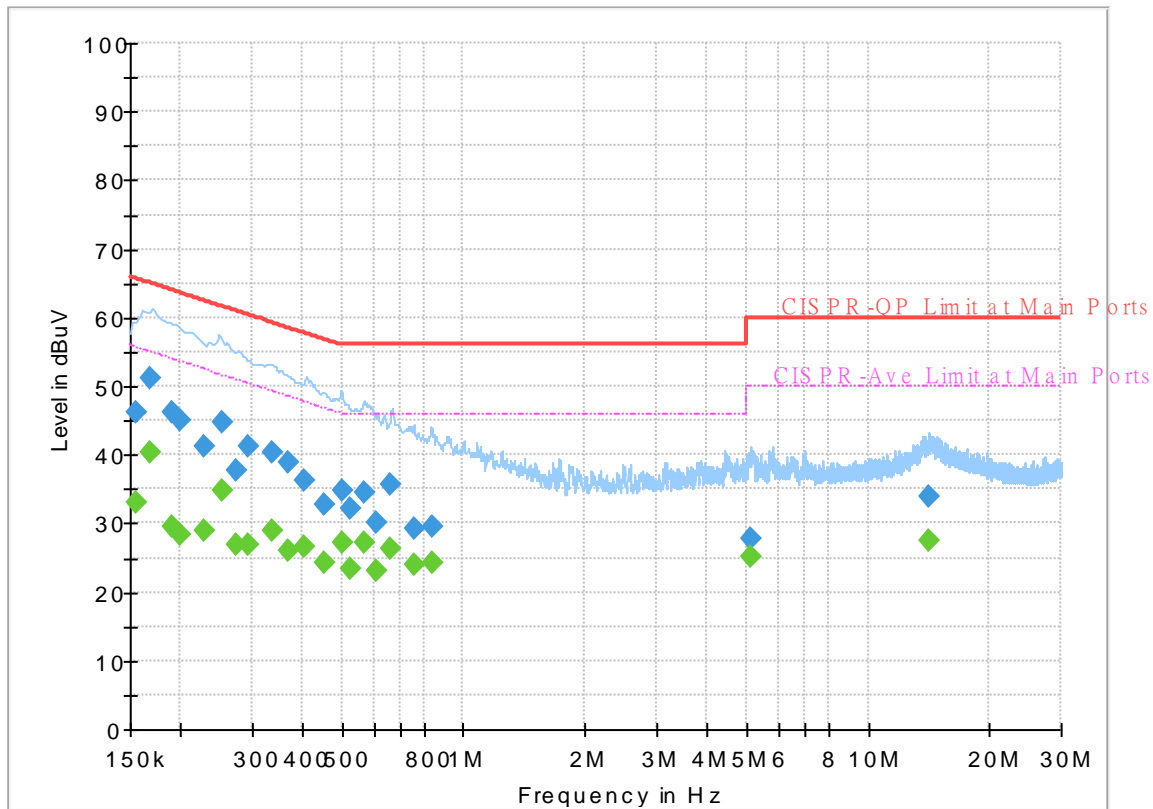

Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.155670	---	33.17	55.69	22.52	N	OFF	19.6
0.155670	46.10	---	65.69	19.59	N	OFF	19.6
0.168990	---	40.27	55.01	14.74	N	OFF	19.6
0.168990	51.14	---	65.01	13.87	N	OFF	19.6
0.190500	---	29.51	54.02	24.51	N	OFF	19.6
0.190500	46.23	---	64.02	17.79	N	OFF	19.6
0.199500	---	28.50	53.63	25.13	N	OFF	19.6
0.199500	45.05	---	63.63	18.58	N	OFF	19.6
0.228750	---	29.01	52.50	23.49	N	OFF	19.6
0.228750	41.12	---	62.50	21.38	N	OFF	19.6
0.253140	---	34.75	51.65	16.90	N	OFF	19.6
0.253140	44.85	---	61.65	16.80	N	OFF	19.6
0.275730	---	26.87	50.94	24.07	N	OFF	19.6
0.275730	37.62	---	60.94	23.32	N	OFF	19.6
0.294000	---	26.85	50.41	23.56	N	OFF	19.6
0.294000	41.15	---	60.41	19.26	N	OFF	19.6
0.336750	---	29.03	49.28	20.25	N	OFF	19.6
0.336750	40.44	---	59.28	18.84	N	OFF	19.6
0.366990	---	26.09	48.57	22.48	N	OFF	19.6
0.366990	38.88	---	58.57	19.69	N	OFF	19.6
0.406500	---	26.70	47.72	21.02	N	OFF	19.6

0.406500	36.37	---	57.72	21.35	N	OFF	19.6
0.453300	---	24.29	46.81	22.52	N	OFF	19.6
0.453300	32.86	---	56.81	23.95	N	OFF	19.6
0.500370	---	27.28	46.00	18.72	N	OFF	19.6
0.500370	34.66	---	56.00	21.34	N	OFF	19.6
0.523140	---	23.31	46.00	22.69	N	OFF	19.6
0.523140	32.28	---	56.00	23.72	N	OFF	19.6
0.566160	---	27.20	46.00	18.80	N	OFF	19.6
0.566160	34.52	---	56.00	21.48	N	OFF	19.6
0.606750	---	23.18	46.00	22.82	N	OFF	19.6
0.606750	30.04	---	56.00	25.96	N	OFF	19.6
0.663000	---	26.28	46.00	19.72	N	OFF	19.6
0.663000	35.56	---	56.00	20.44	N	OFF	19.6
0.755070	---	23.88	46.00	22.12	N	OFF	19.6
0.755070	29.14	---	56.00	26.86	N	OFF	19.6
0.833550	---	24.36	46.00	21.64	N	OFF	19.6
0.833550	29.53	---	56.00	26.47	N	OFF	19.6
5.106750	---	25.12	50.00	24.88	N	OFF	19.8
5.106750	27.75	---	60.00	32.25	N	OFF	19.8
14.203500	---	27.63	50.00	22.37	N	OFF	20.2
14.203500	33.81	---	60.00	26.19	N	OFF	20.2



Appendix C. Radiated Spurious Emission

Test Engineer :	Jacky Hung, Andy Yang, and CR Liro	Temperature :	20~25°C
		Relative Humidity :	50~60%

2.4GHz 2400~2483.5MHz

WIFI 802.11b (Band Edge @ 3m)

WIFI Ant.	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11b CH 01 2412MHz		2388.96	60.88	-13.12	74	44.93	27.64	18.09	29.78	100	82	P	H
		2383.605	46.83	-7.17	54	30.86	27.67	18.08	29.78	100	82	A	H
	*	2412	114.81	-	-	98.87	27.6	18.13	29.79	100	82	P	H
	*	2412	111.8	-	-	95.86	27.6	18.13	29.79	100	82	A	H
		2386.23	56.46	-17.54	74	40.49	27.66	18.09	29.78	400	105	P	V
		2387.385	45.42	-8.58	54	29.46	27.65	18.09	29.78	400	105	A	V
	*	2412	110.42	-	-	94.48	27.6	18.13	29.79	400	105	P	V
	*	2412	107.34	-	-	91.4	27.6	18.13	29.79	400	105	A	V
802.11b CH 06 2437MHz		2362.36	56.44	-17.56	74	40.41	27.75	18.05	29.77	114	80	P	H
		2388.96	45.5	-8.5	54	29.55	27.64	18.09	29.78	114	80	A	H
	*	2437	113.84	-	-	97.87	27.6	18.17	29.8	114	80	P	H
	*	2437	110.9	-	-	94.93	27.6	18.17	29.8	114	80	A	H
		2498.11	56.34	-17.66	74	40.4	27.5	18.27	29.83	114	80	P	H
		2484.04	44.99	-9.01	54	29.04	27.53	18.24	29.82	114	80	A	H
		2315.04	56.13	-17.87	74	39.97	27.94	17.97	29.75	394	105	P	V
		2389.66	44.27	-9.73	54	28.32	27.64	18.09	29.78	394	105	A	V
	*	2437	109.76	-	-	93.79	27.6	18.17	29.8	394	105	P	V
	*	2437	106.6	-	-	90.63	27.6	18.17	29.8	394	105	A	V
		2486.42	57.09	-16.91	74	41.13	27.53	18.25	29.82	394	105	P	V
		2483.5	44.43	-9.57	54	28.48	27.53	18.24	29.82	394	105	A	V



802.11b CH 11 2462MHz	*	2462	113.15	-	-	97.17	27.58	18.21	29.81	111	88	P	H
	*	2462	110.07	-	-	94.09	27.58	18.21	29.81	111	88	A	H
		2485	57.77	-16.23	74	41.81	27.53	18.25	29.82	111	88	P	H
		2483.52	46.67	-7.33	54	30.72	27.53	18.24	29.82	111	88	A	H
	*	2462	109.41	-	-	93.43	27.58	18.21	29.81	386	104	P	V
	*	2462	106.29	-	-	90.31	27.58	18.21	29.81	386	104	A	V
		2496.24	56.65	-17.35	74	40.71	27.51	18.26	29.83	386	104	P	V
		2483.52	46.11	-7.89	54	30.16	27.53	18.24	29.82	386	104	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz
WIFI 802.11b (Harmonic @ 3m)

Table with 14 columns: WIFI Ant. 4+3, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Path Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include data for CH 01 (2412MHz), CH 06 (2437MHz), and CH 11 (2462MHz).

Remark

- 1. No other spurious found.
2. All results are PASS against Peak and Average limit line.



**2.4GHz 2400~2483.5MHz
WIFI 802.11g (Band Edge @ 3m)**

WIFI Ant. 4+3	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11g CH 01 2412MHz		2389.38	61.34	-12.66	74	45.39	27.64	18.09	29.78	101	86	P	H
		2389.065	50.86	-3.14	54	34.91	27.64	18.09	29.78	101	86	A	H
	*	2412	114.19	-	-	98.25	27.6	18.13	29.79	101	86	P	H
	*	2412	106.83	-	-	90.89	27.6	18.13	29.79	101	86	A	H
		2387.805	56.86	-17.14	74	40.9	27.65	18.09	29.78	398	100	P	V
		2390	46.42	-7.58	54	30.47	27.64	18.09	29.78	398	100	A	V
	*	2412	109.66	-	-	93.72	27.6	18.13	29.79	398	100	P	V
	*	2412	102.3	-	-	86.36	27.6	18.13	29.79	398	100	A	V
802.11g CH 06 2437MHz		2387.42	60.65	-13.35	74	44.69	27.65	18.09	29.78	116	85	P	H
		2389.38	48.66	-5.34	54	32.71	27.64	18.09	29.78	116	85	A	H
	*	2437	116.43	-	-	100.46	27.6	18.17	29.8	116	85	P	H
	*	2437	109.22	-	-	93.25	27.6	18.17	29.8	116	85	A	H
		2485.72	57.5	-16.5	74	41.54	27.53	18.25	29.82	116	85	P	H
		2484.18	46.33	-7.67	54	30.38	27.53	18.24	29.82	116	85	A	H
		2369.92	56.95	-17.05	74	40.95	27.72	18.06	29.78	399	102	P	V
		2389.94	45.24	-8.76	54	29.29	27.64	18.09	29.78	399	102	A	V
	*	2437	111.89	-	-	95.92	27.6	18.17	29.8	399	102	P	V
	*	2437	104.88	-	-	88.91	27.6	18.17	29.8	399	102	A	V
		2498.67	57.04	-16.96	74	41.1	27.5	18.27	29.83	399	102	P	V
		2483.5	44.61	-9.39	54	28.66	27.53	18.24	29.82	399	102	A	V



802.11g CH 11 2462MHz	*	2462	112.4	-	-	96.42	27.58	18.21	29.81	107	85	P	H
	*	2462	105.15	-	-	89.17	27.58	18.21	29.81	107	85	A	H
		2483.68	63.22	-10.78	74	47.27	27.53	18.24	29.82	107	85	P	H
		2483.52	51.82	-2.18	54	35.87	27.53	18.24	29.82	107	85	A	H
	*	2462	107.78	-	-	91.8	27.58	18.21	29.81	387	101	P	V
	*	2462	100.72	-	-	84.74	27.58	18.21	29.81	387	101	A	V
		2486.28	57.86	-16.14	74	41.9	27.53	18.25	29.82	387	101	P	V
		2483.52	46.7	-7.3	54	30.75	27.53	18.24	29.82	387	101	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11g (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
4+3		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11g CH 02 2417MHz		2387.7	62.83	-11.17	74	46.87	27.65	18.09	29.78	101	84	P	H
		2388.96	51.88	-2.12	54	35.93	27.64	18.09	29.78	101	84	A	H
	*	2417	112.92	-	-	96.98	27.6	18.14	29.8	101	84	P	H
	*	2417	106.53	-	-	90.59	27.6	18.14	29.8	101	84	A	H
		2388.75	57.08	-16.92	74	41.12	27.65	18.09	29.78	398	89	P	V
		2388.855	45.63	-8.37	54	29.68	27.64	18.09	29.78	398	89	A	V
	*	2417	107.58	-	-	91.64	27.6	18.14	29.8	398	89	P	V
	*	2417	101.04	-	-	85.1	27.6	18.14	29.8	398	89	A	V
802.11g CH 10 2457MHz	*	2457	110.51	-	-	94.53	27.59	18.2	29.81	102	84	P	H
	*	2457	104	-	-	88.02	27.59	18.2	29.81	102	84	A	H
		2484.08	62.58	-11.42	74	46.63	27.53	18.24	29.82	102	84	P	H
		2483.52	51.23	-2.77	54	35.28	27.53	18.24	29.82	102	84	A	H
	*	2457	106.69	-	-	90.71	27.59	18.2	29.81	392	90	P	V
	*	2457	99.45	-	-	83.47	27.59	18.2	29.81	392	90	A	V
		2485.84	57.67	-16.33	74	41.71	27.53	18.25	29.82	392	90	P	V
	2485.32	45.96	-8.04	54	30	27.53	18.25	29.82	392	90	A	V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**2.4GHz 2400~2483.5MHz
WIFI 802.11g (Harmonic @ 3m)**

WIFI Ant. 4+3	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11g CH 01 2412MHz		4824	35.53	-38.47	74	50.06	31.15	12.43	58.11	100	0	P	H
		7230	45.58	-28.42	74	51.28	36.22	15.69	57.61	100	0	P	H
		4824	35.26	-38.74	74	49.79	31.15	12.43	58.11	100	0	P	V
		7230	44.13	-29.87	74	49.83	36.22	15.69	57.61	100	0	P	V
802.11g CH 06 2437MHz		4874	38.68	-35.32	74	53.22	31.1	12.48	58.12	100	0	P	H
		7311	54.5	-19.5	74	59.88	36.44	15.68	57.5	100	0	P	H
		7311	42.73	-11.27	54	48.11	36.44	15.68	57.5	100	0	A	H
		4874	34.86	-39.14	74	49.4	31.1	12.48	58.12	100	0	P	V
		7311	46.36	-27.64	74	51.74	36.44	15.68	57.5	100	0	P	V
802.11g CH 11 2462MHz		4924	35.17	-38.83	74	49.68	31.1	12.52	58.13	100	0	P	H
		7386	42.85	-31.15	74	48.06	36.53	15.66	57.4	100	0	P	H
		4924	35.72	-38.28	74	50.23	31.1	12.52	58.13	100	0	P	V
		7386	41.68	-32.32	74	46.89	36.53	15.66	57.4	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**2.4GHz 2400~2483.5MHz
WIFI 802.11n HT20 (Band Edge @ 3m)**

WIFI Ant. 4+3	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 01 2412MHz		2389.905	61.41	-12.59	74	45.46	27.64	18.09	29.78	101	85	P	H
		2390	50.82	-3.18	54	34.87	27.64	18.09	29.78	101	85	A	H
	*	2412	110.42	-	-	94.48	27.6	18.13	29.79	101	85	P	H
	*	2412	102.73	-	-	86.79	27.6	18.13	29.79	101	85	A	H
		2382.975	57.79	-16.21	74	41.82	27.67	18.08	29.78	399	104	P	V
		2386.44	46	-8	54	30.04	27.65	18.09	29.78	399	104	A	V
	*	2412	105.44	-	-	89.5	27.6	18.13	29.79	399	104	P	V
	*	2412	97.85	-	-	81.91	27.6	18.13	29.79	399	104	A	V
802.11n HT20 CH 06 2437MHz		2388.68	59.84	-14.16	74	43.88	27.65	18.09	29.78	116	87	P	H
		2389.66	49.36	-4.64	54	33.41	27.64	18.09	29.78	116	87	A	H
	*	2437	115.02	-	-	99.05	27.6	18.17	29.8	116	87	P	H
	*	2437	107.04	-	-	91.07	27.6	18.17	29.8	116	87	A	H
		2484.25	58.49	-15.51	74	42.54	27.53	18.24	29.82	116	87	P	H
		2483.69	47.59	-6.41	54	31.64	27.53	18.24	29.82	116	87	A	H
		2354.94	56.8	-17.2	74	40.75	27.78	18.04	29.77	395	101	P	V
		2388.54	46.31	-7.69	54	30.35	27.65	18.09	29.78	395	101	A	V
	*	2437	111.77	-	-	95.8	27.6	18.17	29.8	395	101	P	V
	*	2437	103.79	-	-	87.82	27.6	18.17	29.8	395	101	A	V
		2485.51	56.52	-17.48	74	40.56	27.53	18.25	29.82	395	101	P	V
	2484.25	45.89	-8.11	54	29.94	27.53	18.24	29.82	395	101	A	V	



802.11n HT20 CH 11 2462MHz	*	2462	111.42	-	-	95.44	27.58	18.21	29.81	103	82	P	H
	*	2462	103.55	-	-	87.57	27.58	18.21	29.81	103	82	A	H
		2483.76	63.45	-10.55	74	47.5	27.53	18.24	29.82	103	82	P	H
		2484.4	51.79	-2.21	54	35.83	27.53	18.25	29.82	103	82	A	H
	*	2462	107.32	-	-	91.34	27.58	18.21	29.81	390	107	P	V
	*	2462	99.55	-	-	83.57	27.58	18.21	29.81	390	107	A	V
		2483.72	59.03	-14.97	74	43.08	27.53	18.24	29.82	390	107	P	V
		2484.2	48.49	-5.51	54	32.54	27.53	18.24	29.82	390	107	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**2.4GHz 2400~2483.5MHz
WIFI 802.11n HT20 (Band Edge @ 3m)**

WIFI Ant. 4+3	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 02 2417MHz		2388.855	63.5	-10.5	74	47.55	27.64	18.09	29.78	101	83	P	H
		2389.695	51.44	-2.56	54	35.49	27.64	18.09	29.78	101	83	A	H
	*	2417	111.59	-	-	95.65	27.6	18.14	29.8	101	83	P	H
	*	2417	104.15	-	-	88.21	27.6	18.14	29.8	101	83	A	H
		2388.54	57.91	-16.09	74	41.95	27.65	18.09	29.78	399	89	P	V
		2388.855	46.5	-7.5	54	30.55	27.64	18.09	29.78	399	89	A	V
	*	2417	105.74	-	-	89.8	27.6	18.14	29.8	399	89	P	V
	*	2417	98.57	-	-	82.63	27.6	18.14	29.8	399	89	A	V
802.11n HT20 CH 10 2457MHz	*	2457	110.91	-	-	94.93	27.59	18.2	29.81	123	82	P	H
	*	2457	103.67	-	-	87.69	27.59	18.2	29.81	123	82	A	H
		2484.32	61.32	-12.68	74	45.37	27.53	18.24	29.82	123	82	P	H
		2483.84	50.69	-3.31	54	34.74	27.53	18.24	29.82	123	82	A	H
	*	2457	105.94	-	-	89.96	27.59	18.2	29.81	396	90	P	V
	*	2457	99	-	-	83.02	27.59	18.2	29.81	396	90	A	V
		2497.4	56.55	-17.45	74	40.6	27.51	18.27	29.83	396	90	P	V
	2484.56	46.2	-7.8	54	30.24	27.53	18.25	29.82	396	90	A	V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz
WIFI 802.11n HT20 (Harmonic @ 3m)

Table with 14 columns: WIFI Ant. 4+3, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Path Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include data for 802.11n HT20 CH 01 (2412MHz), CH 06 (2437MHz), and CH 11 (2462MHz).

Remark
1. No other spurious found.
2. All results are PASS against Peak and Average limit line.



Emission above 18GHz

2.4GHz WIFI 802.11g

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
4+3		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz		19113	39.28	-34.72	74	44.58	38.01	20.56	54.33	150	0	P	H
802.11g		19001	39.27	-34.73	74	44.6	38.1	20.51	54.4	150	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Emission below 1GHz
2.4GHz WIFI 802.11g (LF)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
4+3		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz 802.11g LF		110.51	29.16	-14.34	43.5	42.84	16.77	1.81	32.26	-	-	P	H
		219.15	29.21	-16.79	46	43.55	15.43	2.56	32.33	-	-	P	H
		402.48	23.27	-22.73	46	30.08	21.94	3.45	32.2	-	-	P	H
		460.68	27.09	-18.91	46	32.19	23.39	3.64	32.13	-	-	P	H
		730.34	30.54	-15.46	46	30.52	27.6	4.64	32.22	-	-	P	H
		900.09	35.72	-10.28	46	33.5	28.99	5.15	31.92	100	0	P	H
		37.76	34.85	-5.15	40	45.56	20.55	1.03	32.29	100	346	QP	V
		164.83	27.76	-15.74	43.5	41.8	15.99	2.27	32.3	-	-	P	V
		257.95	26.93	-19.07	46	36.7	19.76	2.81	32.34	-	-	P	V
		485.9	26.91	-19.09	46	31.59	23.72	3.71	32.11	-	-	P	V
		749.74	31.8	-14.2	46	31.26	28.09	4.71	32.26	-	-	P	V
		900.09	34.69	-11.31	46	32.47	28.99	5.15	31.92	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
3+4		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) =
Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
= 55.45 (dBμV/m)
2. Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 55.45(dBμV/m) – 74(dBμV/m)
= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
= 43.54 (dBμV/m)
2. Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 43.54(dBμV/m) – 54(dBμV/m)
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.



Appendix D. Radiated Spurious Emission Plots





Test Engineer :	Jacky Hung, Andy Yang, and CR Liro	Temperature :	20~25°C
		Relative Humidity :	50~60%

Note symbol





-L	Low channel location
-R	High channel location







2.4GHz 2400~2483.5MHz
WIFI 802.11b (Band Edge @ 3m)

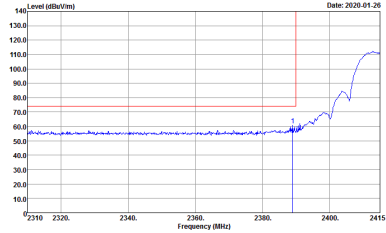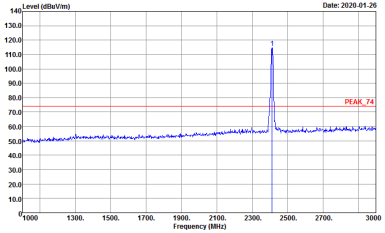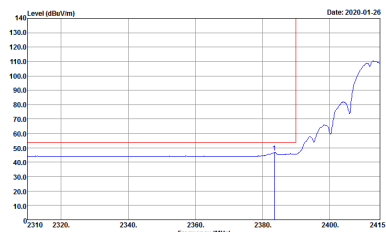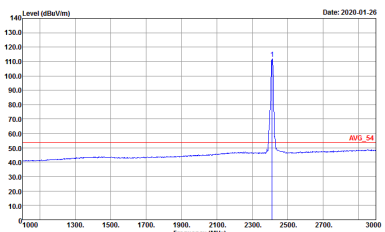WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11b CH01 2412MHz	
4+3	Horizontal	Fundamental
Peak	 <p>Site : 03CH16-1FY Condition : PEAK_BE_74 3m 91200_1522 HORIZONTAL Detector : Peak Project : 9D0616-05</p>	 <p>Site : 03CH16-1FY Condition : PEAK_74 3m 91200_1522 HORIZONTAL Detector : Peak Project : 9D0616-05</p>
Avg.	 <p>Site : 03CH16-1FY Condition : AVG_BE_54 3m 91200_1522 HORIZONTAL Detector : Peak Project : 9D0616-05</p>	 <p>Site : 03CH16-1FY Condition : AVG_54 3m 91200_1522 HORIZONTAL Detector : Peak Project : 9D0616-05</p>

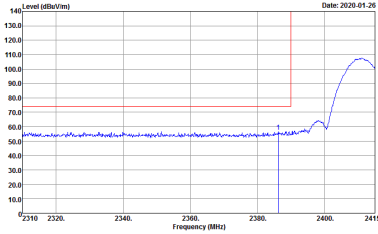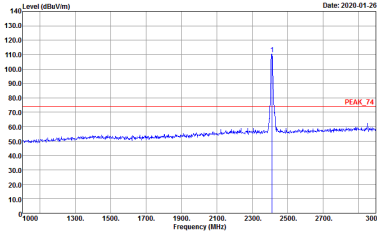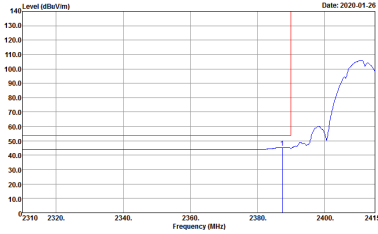
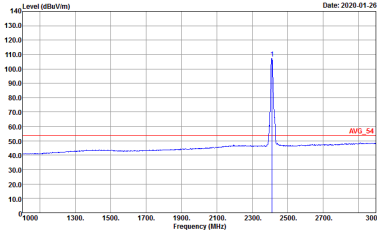


WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11b CH01 2412MHz	
4+3	Vertical	Fundamental
<p>Peak</p>	 <p>Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_1522 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 9D0616-05</p>	 <p>Site : 03CH16-HY Condition : PEAK_74 3m 91200_1522 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 9D0616-05</p>
<p>Avg.</p>	 <p>Site : 03CH16-HY Condition : AVG_BE_54 3m 91200_1522 VERTICAL RBW:1000.000KHz VBW:0.010KHz SWT:Auto Detector : Peak Project : 9D0616-05</p>	 <p>Site : 03CH16-HY Condition : AVG_54 3m 91200_1522 VERTICAL RBW:1000.000KHz VBW:0.010KHz SWT:Auto Detector : Peak Project : 9D0616-05</p>

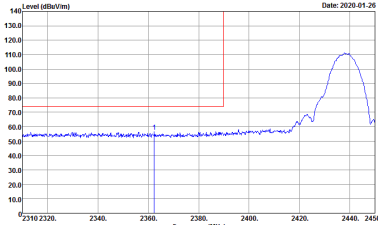
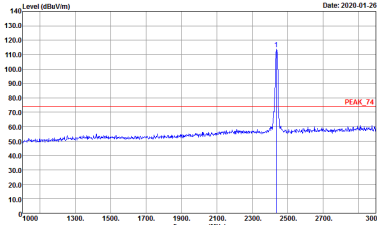
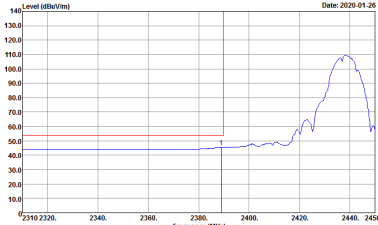
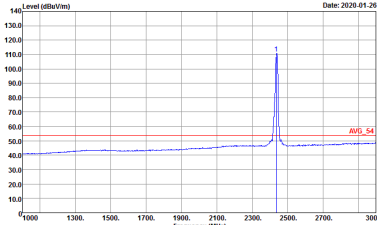


WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11b CH06 2437MHz - L	
4+3	Horizontal	Fundamental
<p>Peak</p>	 <p>Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_1522 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 9D0616-05</p>	 <p>Site : 03CH16-HY Condition : PEAK_74 3m 91200_1522 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 9D0616-05</p>
<p>Avg.</p>	 <p>Site : 03CH16-HY Condition : AVG_BE_54 3m 91200_1522 HORIZONTAL RBW:1000.000KHz VBW:0.010KHz SWT:Auto Detector : Peak Project : 9D0616-05</p>	 <p>Site : 03CH16-HY Condition : AVG_54 3m 91200_1522 HORIZONTAL RBW:1000.000KHz VBW:0.010KHz SWT:Auto Detector : Peak Project : 9D0616-05</p>

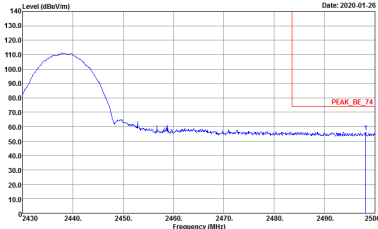
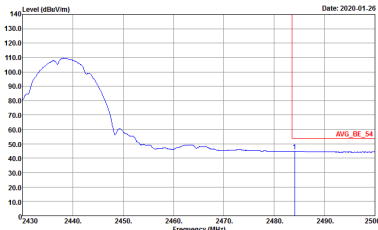


WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11b CH06 2437MHz - R	
4+3	Horizontal	Fundamental
<p>Peak</p>	 <p>Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_1522 HORIZONTAL RBW:1000.000kHz VBW:3000.000kHz SWF:Auto Detector : Peak Project : 9D0616-05</p>	<p>Left blank</p>
<p>Avg.</p>	 <p>Site : 03CH16-HY Condition : AVG_BE_54 3m 91200_1522 HORIZONTAL RBW:1000.000kHz VBW:3000.000kHz SWF:Auto Detector : Peak Project : 9D0616-05</p>	<p>Left blank</p>

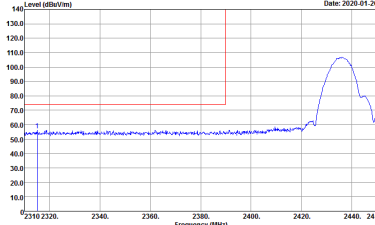
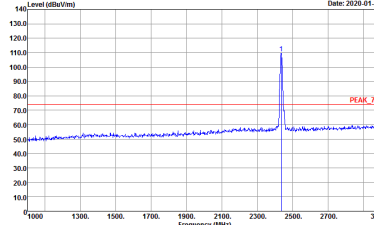
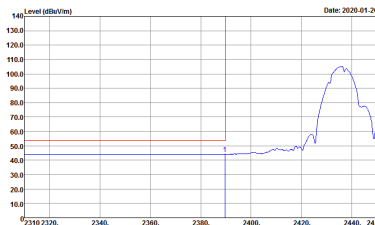
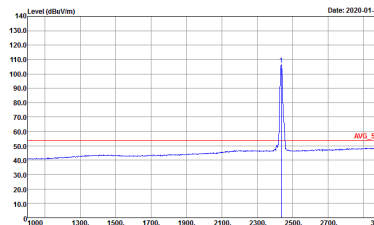


WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11b CH06 2437MHz - L	
4+3	Vertical	Fundamental
Peak	 <p>Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_1522 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 9D0616-05</p>	 <p>Site : 03CH16-HY Condition : PEAK_74 3m 91200_1522 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 9D0616-05</p>
Avg.	 <p>Site : 03CH16-HY Condition : AVG_BE_54 3m 91200_1522 VERTICAL RBW:1000.000KHz VBW:0.010KHz SWT:Auto Detector : Peak Project : 9D0616-05</p>	 <p>Site : 03CH16-HY Condition : AVG_54 3m 91200_1522 VERTICAL RBW:1000.000KHz VBW:0.010KHz SWT:Auto Detector : Peak Project : 9D0616-05</p>



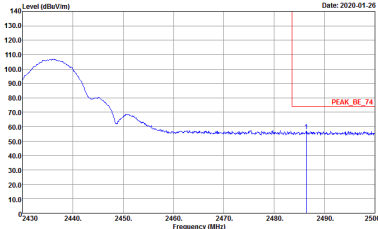
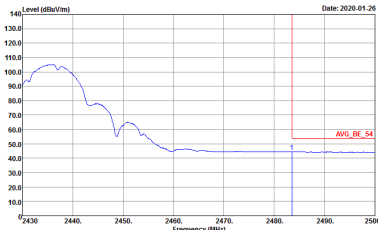


WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11b CH06 2437MHz - R	
4+3	Vertical	Fundamental
<p>Peak</p>	 <p>Date: 2020-01-26</p> <p>Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_1522 VERTICAL RBW:1000.000kHz VBW:3000.000kHz SWF:Auto Detector : Peak Project : 9D0616-05</p>	<p>Left blank</p>
<p>Avg.</p>	 <p>Date: 2020-01-26</p> <p>Site : 03CH16-HY Condition : AVG_BE_54 3m 91200_1522 VERTICAL RBW:1000.000kHz VBW:3000.000kHz SWF:Auto Detector : Peak Project : 9D0616-05</p>	<p>Left blank</p>

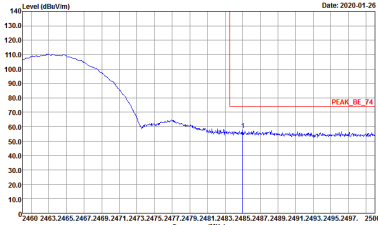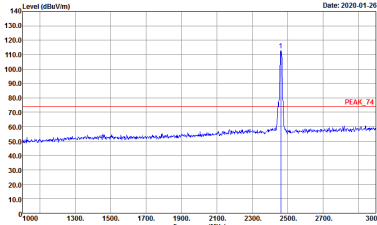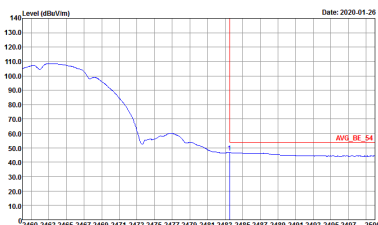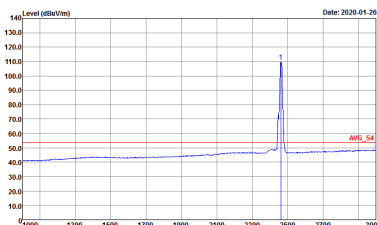





WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11b CH11 2462MHz	
4+3	Horizontal	Fundamental
<p>Peak</p>	 <p>Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_1522 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 9D0616-05</p>	 <p>Site : 03CH16-HY Condition : PEAK_74 3m 91200_1522 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 9D0616-05</p>
<p>Avg.</p>	 <p>Site : 03CH16-HY Condition : AVG_BE_54 3m 91200_1522 HORIZONTAL RBW:1000.000KHz VBW:0.010KHz SWT:Auto Detector : Peak Project : 9D0616-05</p>	 <p>Site : 03CH16-HY Condition : AVG_54 3m 91200_1522 HORIZONTAL RBW:1000.000KHz VBW:0.010KHz SWT:Auto Detector : Peak Project : 9D0616-05</p>

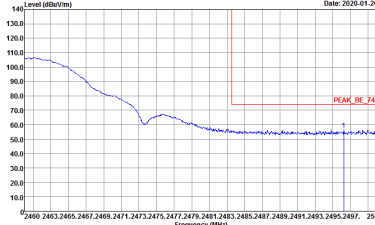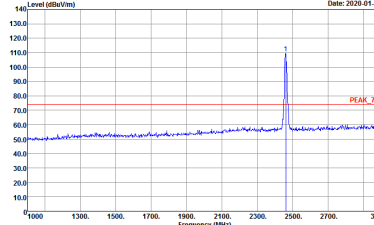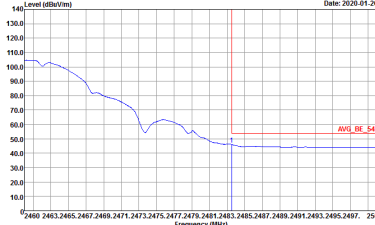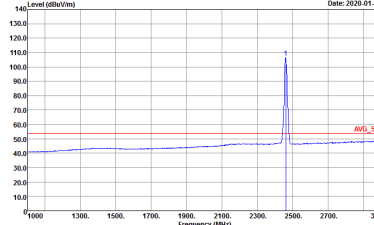





WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11b CH11 2462MHz	
4+3	Vertical	Fundamental
<p>Peak</p>	 <p>Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_1522 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 9D0616-05</p>	 <p>Site : 03CH16-HY Condition : PEAK_74 3m 91200_1522 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 9D0616-05</p>
<p>Avg.</p>	 <p>Site : 03CH16-HY Condition : AVG_BE_54 3m 91200_1522 VERTICAL RBW:1000.000KHz VBW:0.010KHz SWT:Auto Detector : Peak Project : 9D0616-05</p>	 <p>Site : 03CH16-HY Condition : AVG_54 3m 91200_1522 VERTICAL RBW:1000.000KHz VBW:0.010KHz SWT:Auto Detector : Peak Project : 9D0616-05</p>







2.4GHz 2400~2483.5MHz
WIFI 802.11g (Band Edge @ 3m)

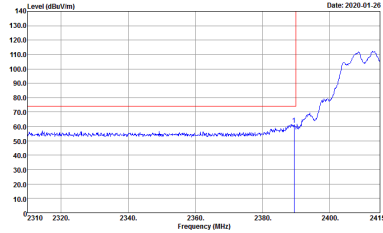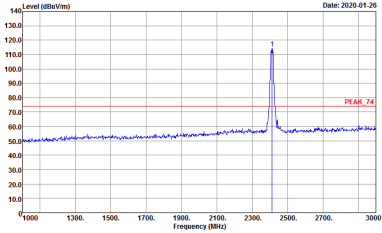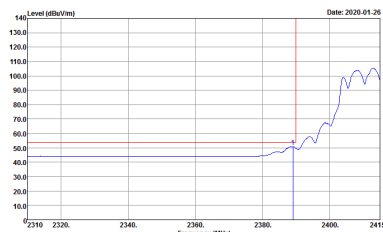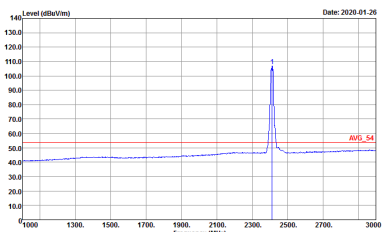WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11g CH01 2412MHz	
4+3	Horizontal	Fundamental
Peak	 <p>Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_1522 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 9D0616-05 Setting : 16</p>	 <p>Site : 03CH16-HY Condition : PEAK_74 3m 91200_1522 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 9D0616-05 Setting : 16</p>
Avg.	 <p>Site : 03CH16-HY Condition : AVG_BE_54 3m 91200_1522 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 9D0616-05 Setting : 16</p>	 <p>Site : 03CH16-HY Condition : AVG_54 3m 91200_1522 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 9D0616-05 Setting : 16</p>

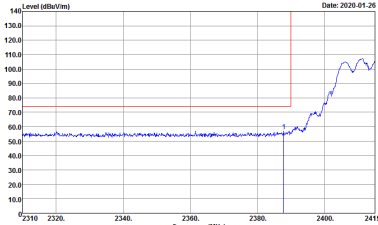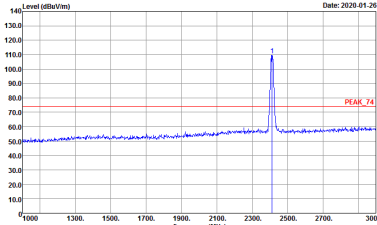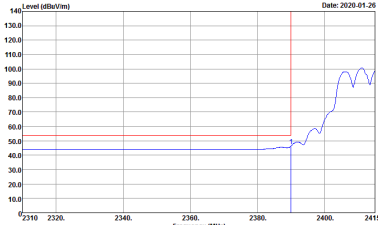
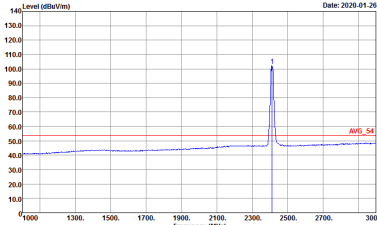


WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11g CH01 2412MHz	
4+3	Vertical	Fundamental
<p>Peak</p>	 <p>Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_1522 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 9D0616-05 Setting : 16</p>	 <p>Site : 03CH16-HY Condition : PEAK_74 3m 91200_1522 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 9D0616-05 Setting : 16</p>
<p>Avg.</p>	 <p>Site : 03CH16-HY Condition : AVG_BE_54 3m 91200_1522 VERTICAL RBW:1000.000KHz VBW:0.010KHz SWT:Auto Detector : Peak Project : 9D0616-05 Setting : 16</p>	 <p>Site : 03CH16-HY Condition : AVG_54 3m 91200_1522 VERTICAL RBW:1000.000KHz VBW:0.010KHz SWT:Auto Detector : Peak Project : 9D0616-05 Setting : 16</p>

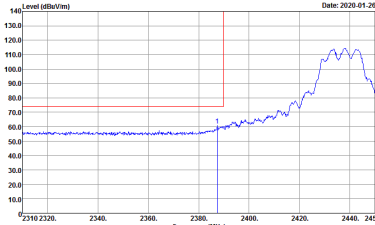
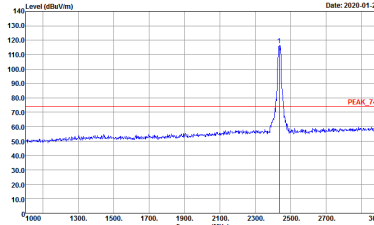
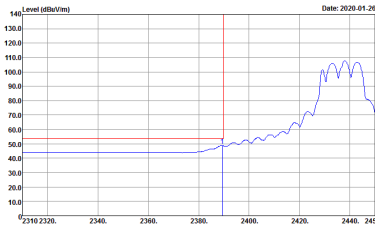
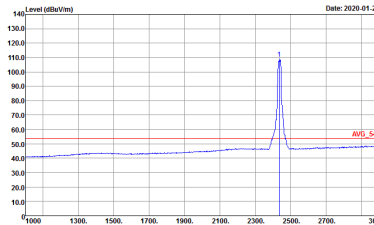


WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11g CH06 2437MHz - L	
4+3	Horizontal	Fundamental
Peak	 <p>Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_1522 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 9D0616-05</p>	 <p>Site : 03CH16-HY Condition : PEAK_74 3m 91200_1522 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 9D0616-05</p>
Avg.	 <p>Site : 03CH16-HY Condition : AVG_BE_54 3m 91200_1522 HORIZONTAL RBW:1000.000KHz VBW:0.010KHz SWT:Auto Detector : Peak Project : 9D0616-05</p>	 <p>Site : 03CH16-HY Condition : AVG_54 3m 91200_1522 HORIZONTAL RBW:1000.000KHz VBW:0.010KHz SWT:Auto Detector : Peak Project : 9D0616-05</p>

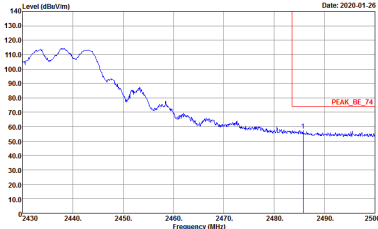
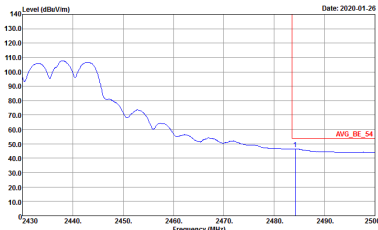


WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11g CH06 2437MHz - R	
4+3	Horizontal	Fundamental
<p>Peak</p>	 <p>Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_1522 HORIZONTAL RBW:1000.000kHz VBW:3000.000kHz SWF:Auto Detector : Peak Project : 9D0616-05</p>	<p>Left blank</p>
<p>Avg.</p>	 <p>Site : 03CH16-HY Condition : AVG_BE_54 3m 91200_1522 HORIZONTAL RBW:1000.000kHz VBW:3000.000kHz SWF:Auto Detector : Peak Project : 9D0616-05</p>	<p>Left blank</p>

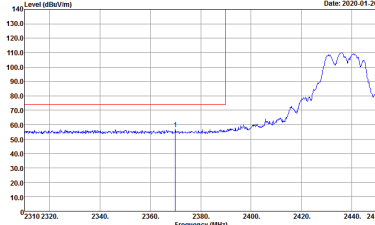
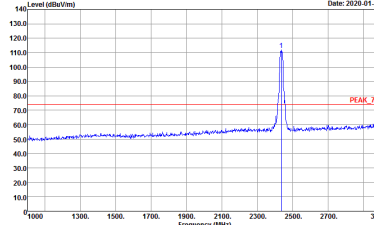
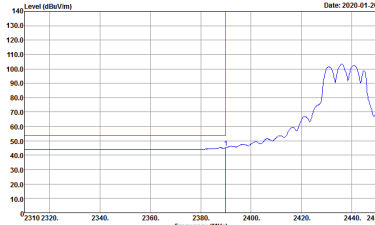
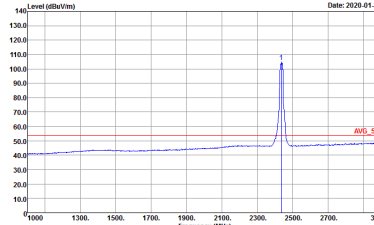


WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11g CH06 2437MHz - L	
4+3	Vertical	Fundamental
Peak	 <p>Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_1522 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 9D0616-05</p>	 <p>Site : 03CH16-HY Condition : PEAK_74 3m 91200_1522 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 9D0616-05</p>
Avg.	 <p>Site : 03CH16-HY Condition : AVG_BE_54 3m 91200_1522 VERTICAL RBW:1000.000KHz VBW:0.010KHz SWT:Auto Detector : Peak Project : 9D0616-05</p>	 <p>Site : 03CH16-HY Condition : AVG_54 3m 91200_1522 VERTICAL RBW:1000.000KHz VBW:0.010KHz SWT:Auto Detector : Peak Project : 9D0616-05</p>



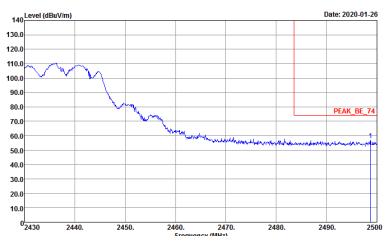
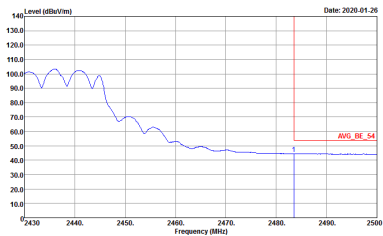


WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11g CH06 2437MHz - R	
4+3	Vertical	Fundamental
<p>Peak</p>	 <p>Date: 2020-01-26</p> <p>Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_1522 VERTICAL RBW:1000.000kHz VBW:3000.000kHz SWF:Auto Detector : Peak Project : 9D0616-05</p>	<p>Left Blank</p>
<p>Avg.</p>	 <p>Date: 2020-01-26</p> <p>Site : 03CH16-HY Condition : AVG_BE_54 3m 91200_1522 VERTICAL RBW:1000.000kHz VBW:3000.000kHz SWF:Auto Detector : Peak Project : 9D0616-05</p>	<p>Left Blank</p>

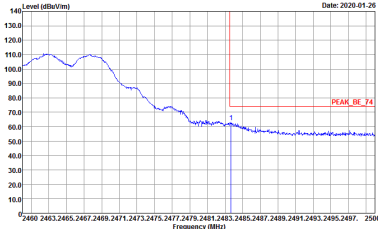
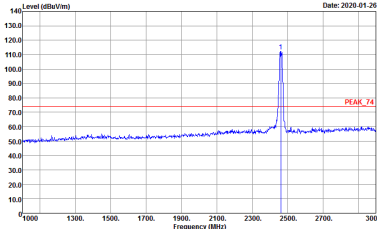
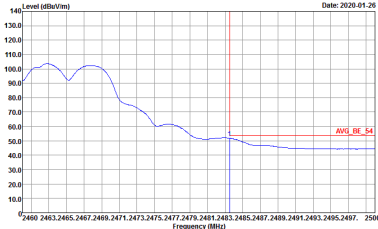
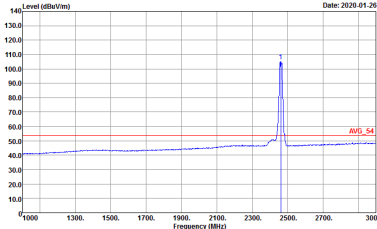


WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11g CH11 2462MHz	
4+3	Horizontal	Fundamental
<p>Peak</p>	 <p>Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_1522 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 9D0616-05 Setting : 16.5</p>	 <p>Site : 03CH16-HY Condition : PEAK_74 3m 91200_1522 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 9D0616-05 Setting : 16.5</p>
<p>Avg.</p>	 <p>Site : 03CH16-HY Condition : AVG_BE_54 3m 91200_1522 HORIZONTAL RBW:1000.000KHz VBW:0.010KHz SWT:Auto Detector : Peak Project : 9D0616-05 Setting : 16.5</p>	 <p>Site : 03CH16-HY Condition : AVG_54 3m 91200_1522 HORIZONTAL RBW:1000.000KHz VBW:0.010KHz SWT:Auto Detector : Peak Project : 9D0616-05 Setting : 16.5</p>

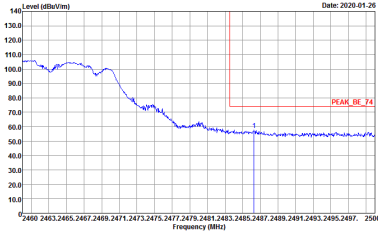
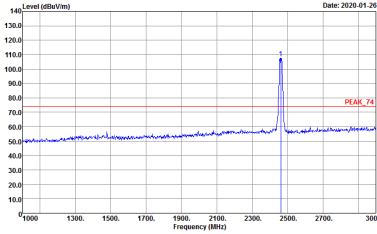
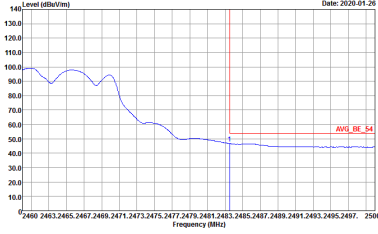
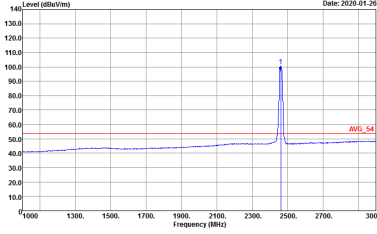


WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11g CH11 2462MHz	
4+3	Vertical	Fundamental
Peak	 <p>Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_1522 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 9D0616-05 Setting : 16.5</p>	 <p>Site : 03CH16-HY Condition : PEAK_74 3m 91200_1522 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 9D0616-05 Setting : 16.5</p>
Avg.	 <p>Site : 03CH16-HY Condition : AVG_BE_54 3m 91200_1522 VERTICAL RBW:1000.000KHz VBW:0.010KHz SWT:Auto Detector : Peak Project : 9D0616-05 Setting : 16.5</p>	 <p>Site : 03CH16-HY Condition : AVG_54 3m 91200_1522 VERTICAL RBW:1000.000KHz VBW:0.010KHz SWT:Auto Detector : Peak Project : 9D0616-05 Setting : 16.5</p>

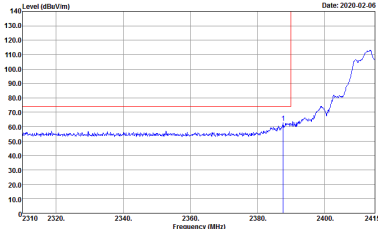
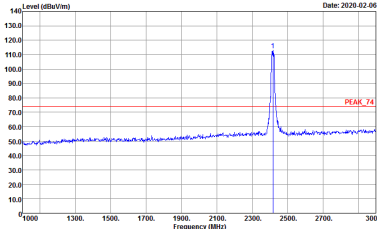
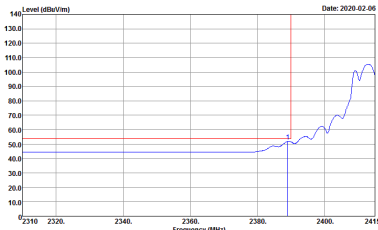
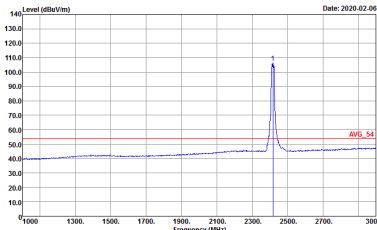


WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11g CH02 2417MHz	
4+3	Horizontal	Fundamental
Peak	 <p>Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_1522 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 9D0616-05 Setting : 17.5</p>	 <p>Site : 03CH16-HY Condition : PEAK_74 3m 91200_1522 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 9D0616-05 Setting : 17.5</p>
Avg.	 <p>Site : 03CH16-HY Condition : AVG_BE_54 3m 91200_1522 HORIZONTAL RBW:1000.000KHz VBW:0.010KHz SWT:Auto Detector : Peak Project : 9D0616-05 Setting : 17.5</p>	 <p>Site : 03CH16-HY Condition : AVG_54 3m 91200_1522 HORIZONTAL RBW:1000.000KHz VBW:0.010KHz SWT:Auto Detector : Peak Project : 9D0616-05 Setting : 17.5</p>

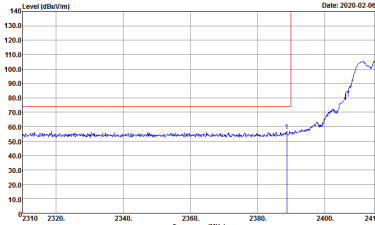
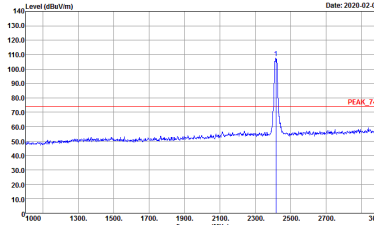
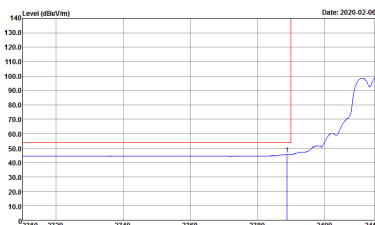
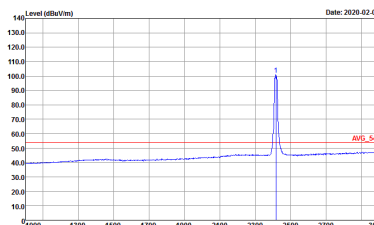


WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11g CH02 2417MHz	
4+3	Vertical	Fundamental
<p>Peak</p>	 <p>Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_1522 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 9D0616-05 Setting : 17.5</p>	 <p>Site : 03CH16-HY Condition : PEAK_74 3m 91200_1522 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 9D0616-05 Setting : 17.5</p>
<p>Avg.</p>	 <p>Site : 03CH16-HY Condition : AVG_BE_54 3m 91200_1522 VERTICAL RBW:1000.000KHz VBW:0.010KHz SWT:Auto Detector : Peak Project : 9D0616-05 Setting : 17.5</p>	 <p>Site : 03CH16-HY Condition : AVG_54 3m 91200_1522 VERTICAL RBW:1000.000KHz VBW:0.010KHz SWT:Auto Detector : Peak Project : 9D0616-05 Setting : 17.5</p>

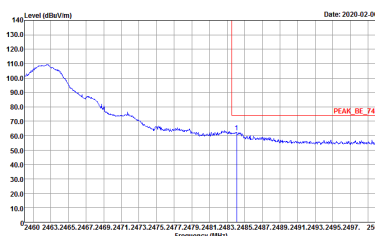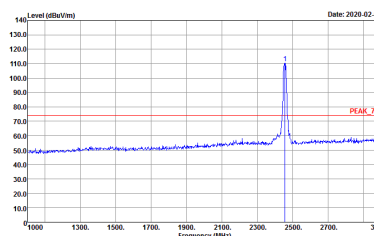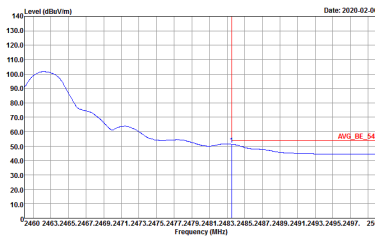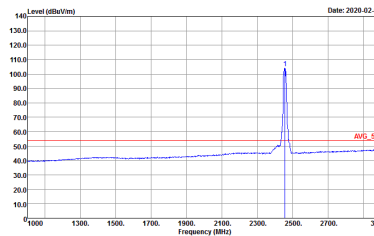

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11g CH10 2457MHz	
4+3	Horizontal	Fundamental
<p>Peak</p>	 <p>Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_1522 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 9D0616-05 Setting : 17.5</p>	 <p>Site : 03CH16-HY Condition : PEAK_74 3m 91200_1522 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 9D0616-05 Setting : 17.5</p>
<p>Avg.</p>	 <p>Site : 03CH16-HY Condition : AVG_BE_54 3m 91200_1522 HORIZONTAL RBW:1000.000KHz VBW:0.010KHz SWT:Auto Detector : Peak Project : 9D0616-05 Setting : 17.5</p>	 <p>Site : 03CH16-HY Condition : AVG_54 3m 91200_1522 HORIZONTAL RBW:1000.000KHz VBW:0.010KHz SWT:Auto Detector : Peak Project : 9D0616-05 Setting : 17.5</p>

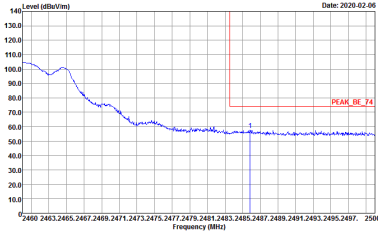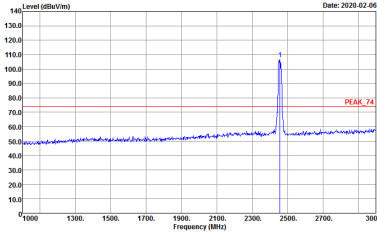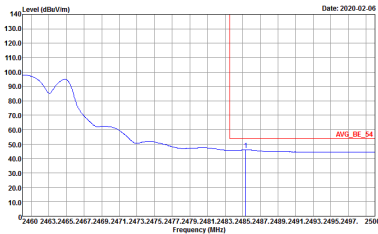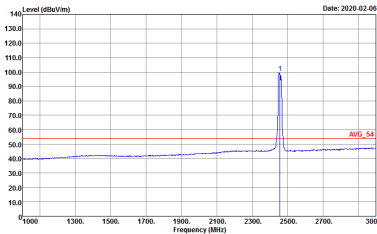

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11g CH10 2457MHz	
4+3	Vertical	Fundamental
Peak	 <p>Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_1522 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 9D0616-05 Setting : 17.5</p>	 <p>Site : 03CH16-HY Condition : PEAK_74 3m 91200_1522 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 9D0616-05 Setting : 17.5</p>
Avg.	 <p>Site : 03CH16-HY Condition : AVG_BE_54 3m 91200_1522 VERTICAL RBW:1000.000KHz VBW:0.010KHz SWT:Auto Detector : Peak Project : 9D0616-05 Setting : 17.5</p>	 <p>Site : 03CH16-HY Condition : AVG_54 3m 91200_1522 VERTICAL RBW:1000.000KHz VBW:0.010KHz SWT:Auto Detector : Peak Project : 9D0616-05 Setting : 17.5</p>







2.4GHz 2400~2483.5MHz
WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11n HT20 CH01 2412MHz	
4+3	Horizontal	Fundamental
Peak	<p>Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_1522 HORIZONTAL Detector : Peak Project : 90D0616-05 Setting : 13.5</p>	<p>Site : 03CH16-HY Condition : PEAK_74 3m 91200_1522 HORIZONTAL Detector : Peak Project : 90D0616-05 Setting : 13.5</p>
Avg.	<p>Site : 03CH16-HY Condition : AVG_BE_54 3m 91200_1522 HORIZONTAL Detector : Peak Project : 90D0616-05 Setting : 13.5</p>	<p>Site : 03CH16-HY Condition : AVG_54 3m 91200_1522 HORIZONTAL Detector : Peak Project : 90D0616-05 Setting : 13.5</p>





WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11n HT20 CH01 2412MHz	
4+3	Vertical	Fundamental
<p>Peak</p>	<p>Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_1522 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 9D0616-05 Setting : 13.5</p>	<p>Site : 03CH16-HY Condition : PEAK_74 3m 91200_1522 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 9D0616-05 Setting : 13.5</p>
<p>Avg.</p>	<p>Site : 03CH16-HY Condition : AVG_BE_54 3m 91200_1522 VERTICAL RBW:1000.000KHz VBW:1000KHz SWT:Auto Detector : Peak Project : 9D0616-05 Setting : 13.5</p>	<p>Site : 03CH16-HY Condition : AVG_54 3m 91200_1522 VERTICAL RBW:1000.000KHz VBW:1000KHz SWT:Auto Detector : Peak Project : 9D0616-05 Setting : 13.5</p>

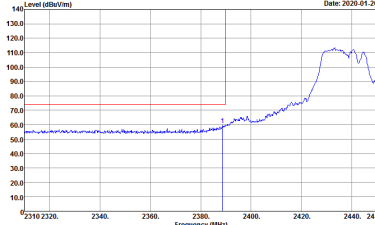
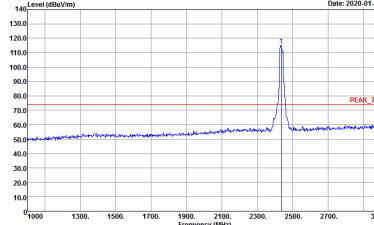
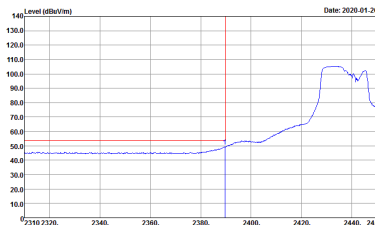
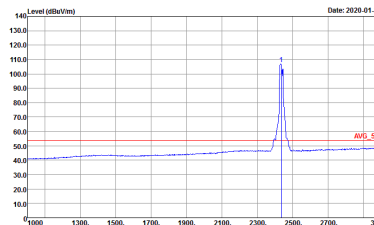


WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11n HT20 CH06 2437MHz - L	
4+3	Horizontal	Fundamental
Peak	 <p>Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_1522 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 9D0616-05</p>	 <p>Site : 03CH16-HY Condition : PEAK_74 3m 91200_1522 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 9D0616-05</p>
Avg.	 <p>Site : 03CH16-HY Condition : AVG_BE_54 3m 91200_1522 HORIZONTAL RBW:1000.000KHz VBW:1000KHz SWT:Auto Detector : Peak Project : 9D0616-05</p>	 <p>Site : 03CH16-HY Condition : AVG_54 3m 91200_1522 HORIZONTAL RBW:1000.000KHz VBW:1000KHz SWT:Auto Detector : Peak Project : 9D0616-05</p>

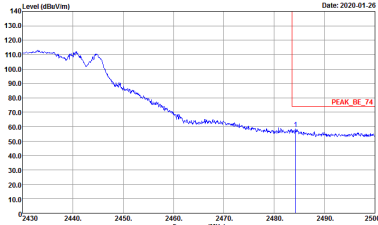
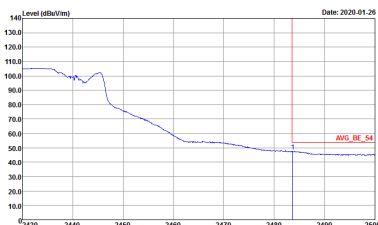


WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11n HT20 CH06 2437MHz - R	
4+3	Horizontal	Fundamental
<p>Peak</p>	 <p>Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_1522 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWF:Auto Detector : Peak Project : 9D0616-05</p>	<p>Left blank</p>
<p>Avg.</p>	 <p>Site : 03CH16-HY Condition : AVG_BE_54 3m 91200_1522 HORIZONTAL RBW:1000.000KHz VBW:1000KHz SWF:Auto Detector : Peak Project : 9D0616-05</p>	<p>Left blank</p>

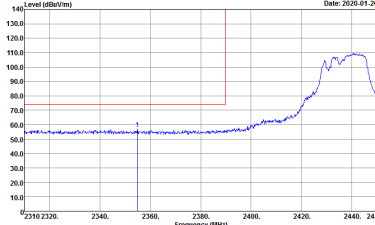
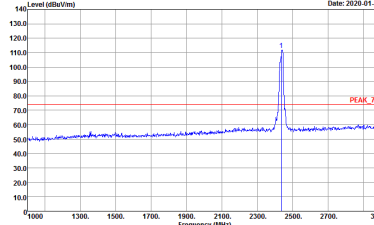
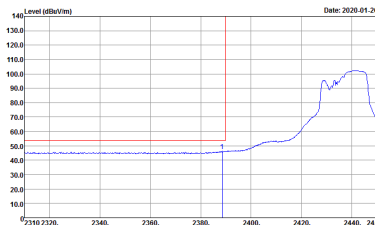
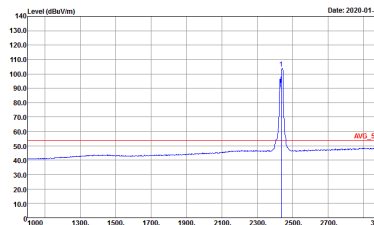


WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11n HT20 CH06 2437MHz - L	
4+3	Vertical	Fundamental
Peak	 <p>Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_1522 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 9D0616-05</p>	 <p>Site : 03CH16-HY Condition : PEAK_74 3m 91200_1522 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 9D0616-05</p>
Avg.	 <p>Site : 03CH16-HY Condition : AVG_BE_54 3m 91200_1522 VERTICAL RBW:1000.000KHz VBW:1000KHz SWT:Auto Detector : Peak Project : 9D0616-05</p>	 <p>Site : 03CH16-HY Condition : AVG_54 3m 91200_1522 VERTICAL RBW:1000.000KHz VBW:1000KHz SWT:Auto Detector : Peak Project : 9D0616-05</p>



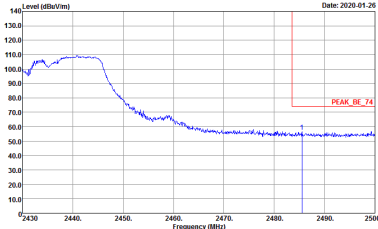
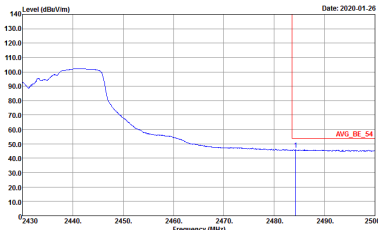


WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11n HT20 CH06 2437MHz - R	
4+3	Vertical	Fundamental
<p>Peak</p>	 <p>Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_1522 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWF:Auto Detector : Peak Project : 9D0616-05</p>	<p>Left Blank</p>
<p>Avg.</p>	 <p>Site : 03CH16-HY Condition : AVG_BE_54 3m 91200_1522 VERTICAL RBW:1000.000KHz VBW:1000KHz SWF:Auto Detector : Peak Project : 9D0616-05</p>	<p>Left Blank</p>

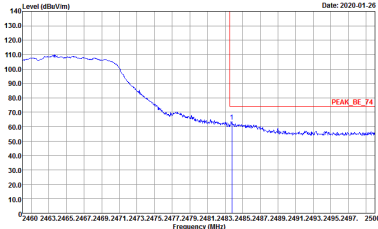
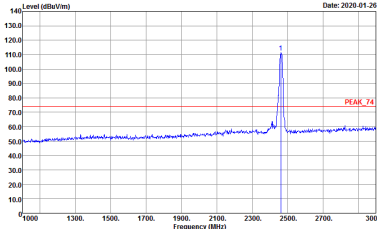
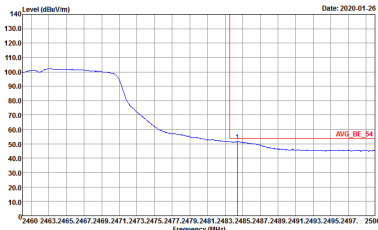
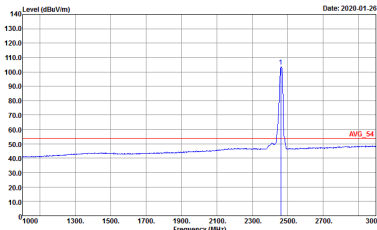


WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11n HT20 CH11 2462MHz	
4+3	Horizontal	Fundamental
Peak	 <p>Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_1522 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 9D0616-05 Setting : 16</p>	 <p>Site : 03CH16-HY Condition : PEAK_74 3m 91200_1522 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 9D0616-05 Setting : 16</p>
Avg.	 <p>Site : 03CH16-HY Condition : AVG_BE_54 3m 91200_1522 HORIZONTAL RBW:1000.000KHz VBW:1000KHz SWT:Auto Detector : Peak Project : 9D0616-05 Setting : 16</p>	 <p>Site : 03CH16-HY Condition : AVG_54 3m 91200_1522 HORIZONTAL RBW:1000.000KHz VBW:1000KHz SWT:Auto Detector : Peak Project : 9D0616-05 Setting : 16</p>

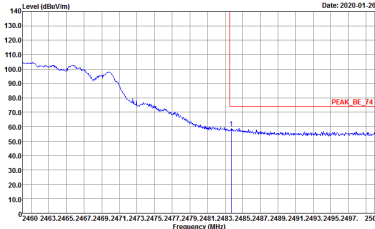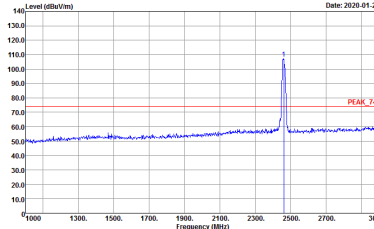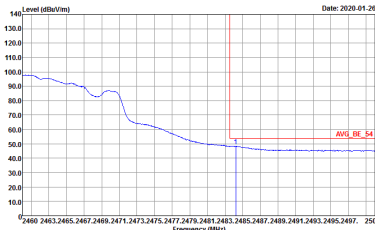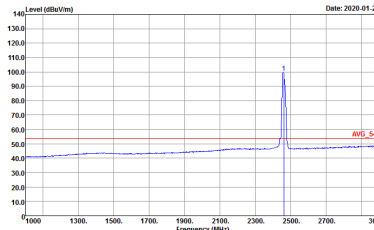

WIFI	2.4GHz 2400~2483.5MHz Fundamental @ 3m	
ANT	802.11n HT20 CH11 2462MHz	
4+3	Vertical	Fundamental
Peak	 <p>Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_1522 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 9D0616-05 Setting : 16</p>	 <p>Site : 03CH16-HY Condition : PEAK_74 3m 91200_1522 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 9D0616-05 Setting : 16</p>
Avg.	 <p>Site : 03CH16-HY Condition : AVG_BE_54 3m 91200_1522 VERTICAL RBW:1000.000KHz VBW:1.000KHz SWT:Auto Detector : Peak Project : 9D0616-05 Setting : 16</p>	 <p>Site : 03CH16-HY Condition : AVG_54 3m 91200_1522 VERTICAL RBW:1000.000KHz VBW:1.000KHz SWT:Auto Detector : Peak Project : 9D0616-05 Setting : 16</p>

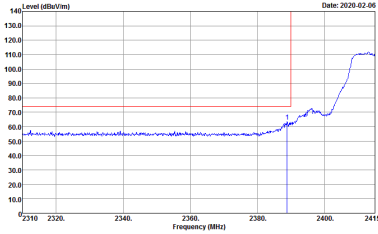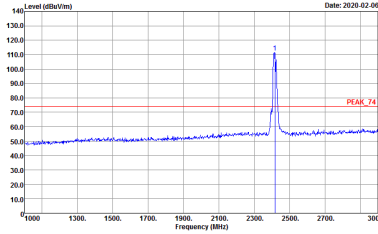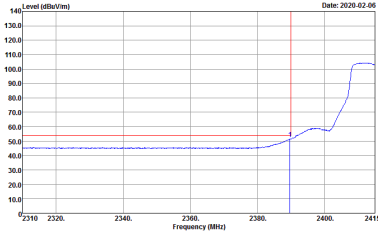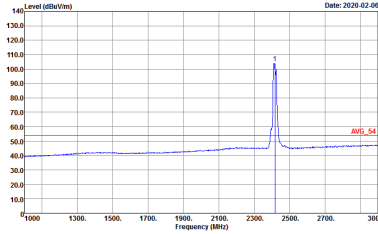

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11n HT20 CH02 2417MHz	
4+3	Horizontal	Fundamental
<p>Peak</p>	 <p>Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_1522 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 9D0616-05 Setting : 16.5</p>	 <p>Site : 03CH16-HY Condition : PEAK_74 3m 91200_1522 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 9D0616-05 Setting : 16.5</p>
<p>Avg.</p>	 <p>Site : 03CH16-HY Condition : AVG_BE_54 3m 91200_1522 HORIZONTAL RBW:1000.000KHz VBW:1000KHz SWT:Auto Detector : Peak Project : 9D0616-05 Setting : 16.5</p>	 <p>Site : 03CH16-HY Condition : AVG_54 3m 91200_1522 HORIZONTAL RBW:1000.000KHz VBW:1000KHz SWT:Auto Detector : Peak Project : 9D0616-05 Setting : 16.5</p>







WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11n HT20 CH02 2417MHz	
4+3	Vertical	Fundamental
<p>Peak</p>	<p>Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_1522 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 9D0616-05 Setting : 16.5</p>	<p>Site : 03CH16-HY Condition : PEAK_74 3m 91200_1522 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 9D0616-05 Setting : 16.5</p>
<p>Avg.</p>	<p>Site : 03CH16-HY Condition : AVG_BE_54 3m 91200_1522 VERTICAL RBW:1000.000KHz VBW:1000KHz SWT:Auto Detector : Peak Project : 9D0616-05 Setting : 16.5</p>	<p>Site : 03CH16-HY Condition : AVG_54 3m 91200_1522 VERTICAL RBW:1000.000KHz VBW:1000KHz SWT:Auto Detector : Peak Project : 9D0616-05 Setting : 16.5</p>



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11n HT20 CH10 2457MHz	
4+3	Horizontal	Fundamental
<p>Peak</p>	<p>Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_1522 HORIZONTAL Detector : Peak Project : 9D0616-05 Setting : 17</p>	<p>Site : 03CH16-HY Condition : PEAK_74 3m 91200_1522 HORIZONTAL Detector : Peak Project : 9D0616-05 Setting : 17</p>
<p>Avg.</p>	<p>Site : 03CH16-HY Condition : AVG_BE_54 3m 91200_1522 HORIZONTAL Detector : Peak Project : 9D0616-05 Setting : 17</p>	<p>Site : 03CH16-HY Condition : AVG_54 3m 91200_1522 HORIZONTAL Detector : Peak Project : 9D0616-05 Setting : 17</p>

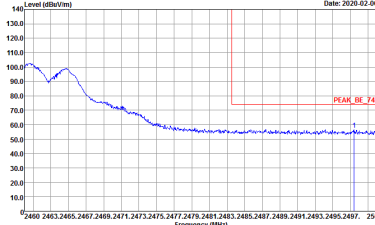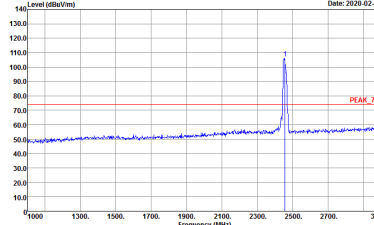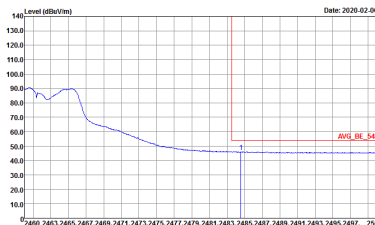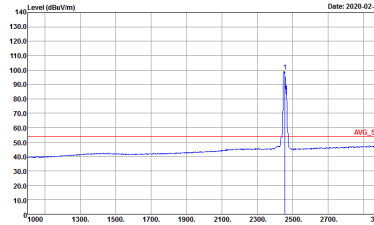

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11n HT20 CH10 2457MHz	
4+3	Vertical	Fundamental
<p>Peak</p>	 <p>Date: 2020-02-06</p> <p>Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_1522 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 950616-05 Setting : 17</p>	 <p>Date: 2020-02-06</p> <p>Site : 03CH16-HY Condition : PEAK_74 3m 91200_1522 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 950616-05 Setting : 17</p>
<p>Avg.</p>	 <p>Date: 2020-02-06</p> <p>Site : 03CH16-HY Condition : AVG_BE_54 3m 91200_1522 VERTICAL RBW:1000.000KHz VBW:1000KHz SWT:Auto Detector : Peak Project : 950616-05 Setting : 17</p>	 <p>Date: 2020-02-06</p> <p>Site : 03CH16-HY Condition : AVG_54 3m 91200_1522 VERTICAL RBW:1000.000KHz VBW:1000KHz SWT:Auto Detector : Peak Project : 950616-05 Setting : 17</p>





2.4GHz 2400~2483.5MHz
WIFI 802.11b (Harmonic @ 3m)

WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11b CH01 2412MHz	
4+3	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH16-14Y Condition : PEAK_74 3m 91200_1522 HORIZONTAL Detector : Peak Project : 9D0616-05</p>	<p>Site : 03CH16-14Y Condition : PEAK_74 3m 91200_1522 VERTICAL Detector : Peak Project : 9D0616-05</p>



WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11b CH06 2437MHz	
4+3	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH16-HY Condition : PEAK_74 3m 91200_1522 HORIZONTAL Detector : Peak Project : 9D0616-05</p>	<p>Site : 03CH16-HY Condition : PEAK_74 3m 91200_1522 VERTICAL Detector : Peak Project : 9D0616-05</p>

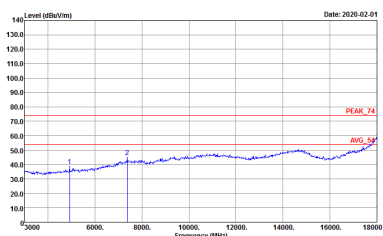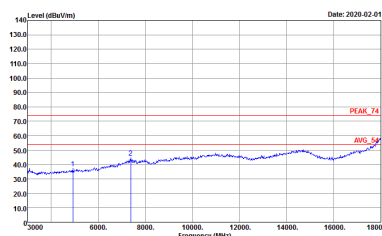

WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11b CH11 2462MHz	
4+3	Horizontal	Vertical
<p>Peak</p> <p>Avg.</p>	 <p>Site : 03CH16-HY Condition : PEAK_74 3m 91200_1522 HORIZONTAL Detector : Peak Project : 9D0616-05</p>	 <p>Site : 03CH16-HY Condition : PEAK_74 3m 91200_1522 VERTICAL Detector : Peak Project : 9D0616-05</p>



2.4GHz 2400~2483.5MHz
WIFI 802.11g (Harmonic @ 3m)

WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11g CH01 2412MHz	
4+3	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH16-14Y Condition : PEAK_74 3m 91200_1522 HORIZONTAL Detector : Peak Project : 9D0616-05 Setting : 16</p>	<p>Site : 03CH16-14Y Condition : PEAK_74 3m 91200_1522 VERTICAL Detector : Peak Project : 9D0616-05 Setting : 16</p>



WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11g CH06 2437MHz	
4+3	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH16-HY Condition : PEAK_74 3m 91200_1522 HORIZONTAL Detector : Peak Project : 9D0616-05</p>	<p>Site : 03CH16-HY Condition : PEAK_74 3m 91200_1522 VERTICAL Detector : Peak Project : 9D0616-05</p>



WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11g CH11 2462MHz	
4+3	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH16-HY Condition : PEAK_74 3m 91200_1522 HORIZONTAL Detector : Peak Project : 9D0616-05 Setting : 16.5</p>	<p>Site : 03CH16-HY Condition : PEAK_74 3m 91200_1522 VERTICAL Detector : Peak Project : 9D0616-05 Setting : 16.5</p>



2.4GHz 2400~2483.5MHz
 WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11n HT20 CH01 2412MHz	
4+3	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH16-1FY Condition : PEAK_74 3m 91200_1522 HORIZONTAL Detector : Peak Project : 9D0616-05 Setting : 13.5</p>	<p>Site : 03CH16-1FY Condition : PEAK_74 3m 91200_1522 VERTICAL Detector : Peak Project : 9D0616-05 Setting : 13.5</p>



WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11n HT20 CH06 2437MHz	
4+3	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH16-HY Condition : PEAK_74 3m 91200_1522 HORIZONTAL Detector : Peak Project : 9D0616-05</p>	<p>Site : 03CH16-HY Condition : PEAK_74 3m 91200_1522 VERTICAL Detector : Peak Project : 9D0616-05</p>



WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11n HT20 CH11 2462MHz	
4+3	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH16-HY Condition : PEAK_74 3m 91200_1522 HORIZONTAL Detector : Peak Project : 9D0616-05 Setting : 16</p>	<p>Site : 03CH16-HY Condition : PEAK_74 3m 91200_1522 VERTICAL Detector : Peak Project : 9D0616-05 Setting : 16</p>





Emission above 18GHz
2.4GHz WIFI 802.11g

WIFI	2.4GHz 2400~2483.5MHz	
ANT	802.11g	
4+3	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH16-4Y Condition : PEAK_74 3m 9120D_1522 HORIZONTAL Detector : Peak Project : 9D0616-05</p>	<p>Site : 03CH16-4Y Condition : PEAK_74 3m 9120D_1522 VERTICAL Detector : Peak Project : 9D0616-05</p>



Emission below 1GHz
2.4GHz WIFI 802.11g (LF)

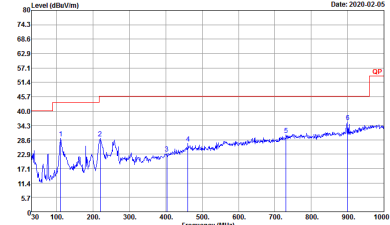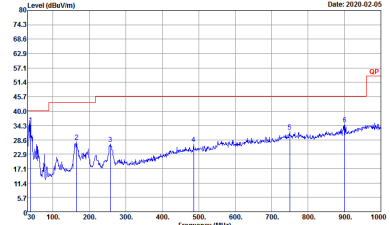WIFI	2.4GHz 2400~2483.5MHz	
ANT	802.11g LF	
4+3	Horizontal	Vertical
QP / Peak	 <p>Site : 03CH16-FY Condition : QP 3m BTL06_47020406 HORIZONTAL Detector : Peak Project : 9D0616-05</p>	 <p>Site : 03CH16-FY Condition : QP 3m BTL06_47020406 VERTICAL Detector : Peak Project : 9D0616-05</p>




Appendix E. Duty Cycle Plots

Antenna	Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting	Duty Factor(dB)
4+3	802.11b for Ant. 4	98.45	-	-	10Hz	0.07
4+3	802.11b for Ant. 3	98.66	-	-	10Hz	0.06
4+3	802.11g for Ant. 4	98.36	-	-	10Hz	0.07
4+3	802.11g for Ant. 3	97.93	2037	0.49	1kHz	0.09
4+3	2.4GHz 802.11n HT20 for Ant. 4	98.16	-	-	10Hz	0.08
4+3	2.4GHz 802.11n HT20 for Ant. 3	97.85	1892	0.53	1kHz	0.09
4+3	2.4GHz 802.11ac VHT20 for Ant. 4	98.03	-	-	10Hz	0.09
4+3	2.4GHz 802.11ac VHT20 for Ant. 3	97.94	1903	0.53	1kHz	0.09




MIMO <Ant. 4>

802.11b

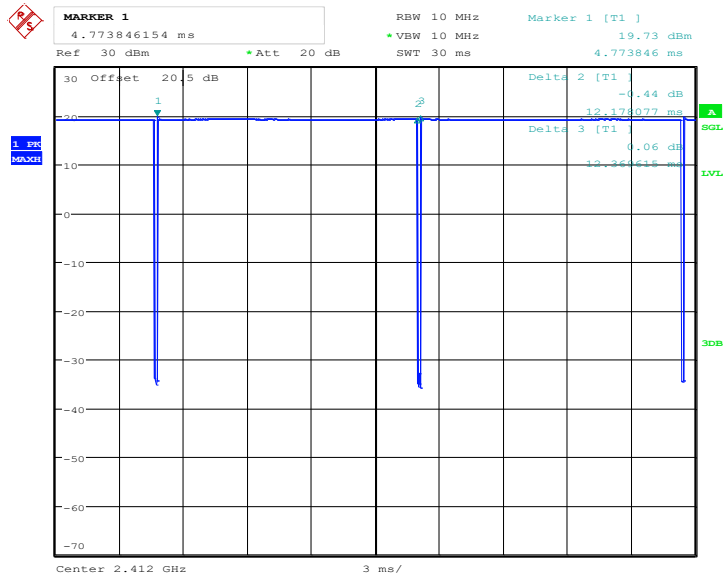

Date: 1.JAN.2003 08:16:20


802.11g

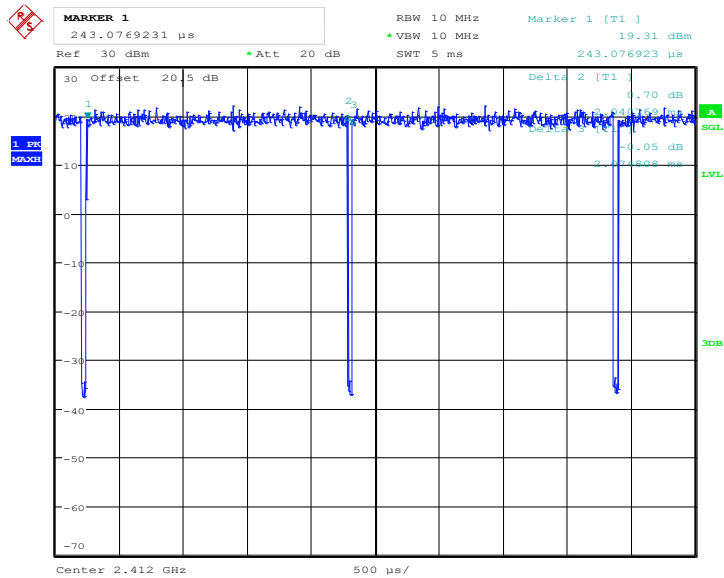

Date: 1.JAN.2003 08:20:23




802.11n HT20

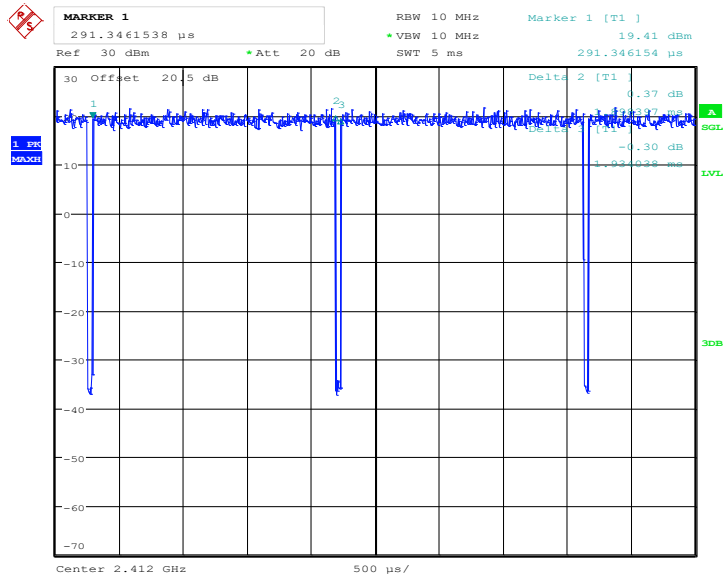

Date: 1.JAN.2003 08:24:24

802.11ac VHT20

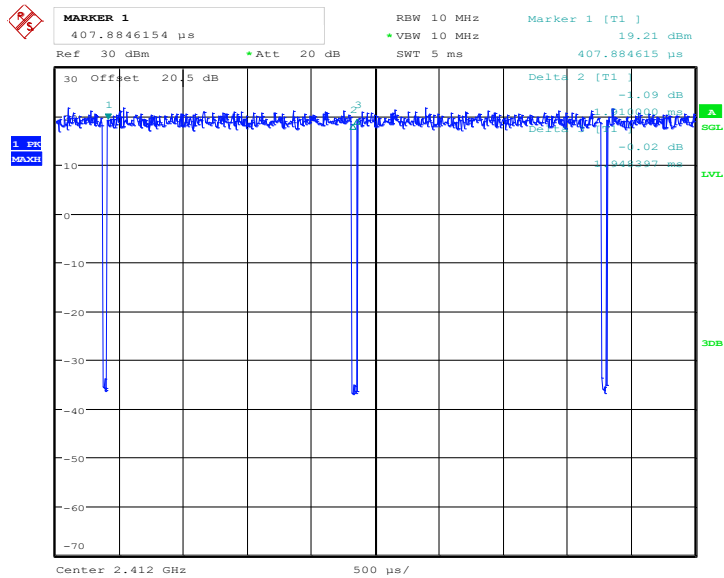


Date: 1.JAN.2003 08:51:24




MIMO <Ant. 3>

802.11b

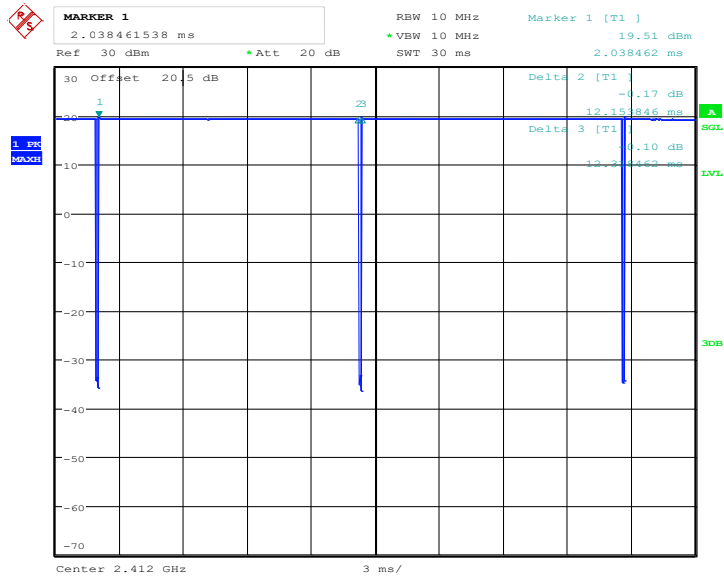

Date: 1.JAN.2003 08:17:08


802.11g

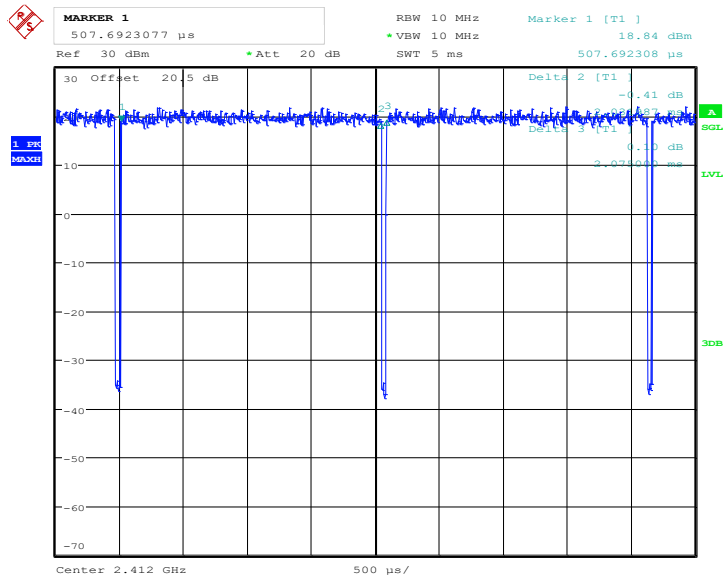

Date: 1.JAN.2003 08:21:10




802.11n HT20

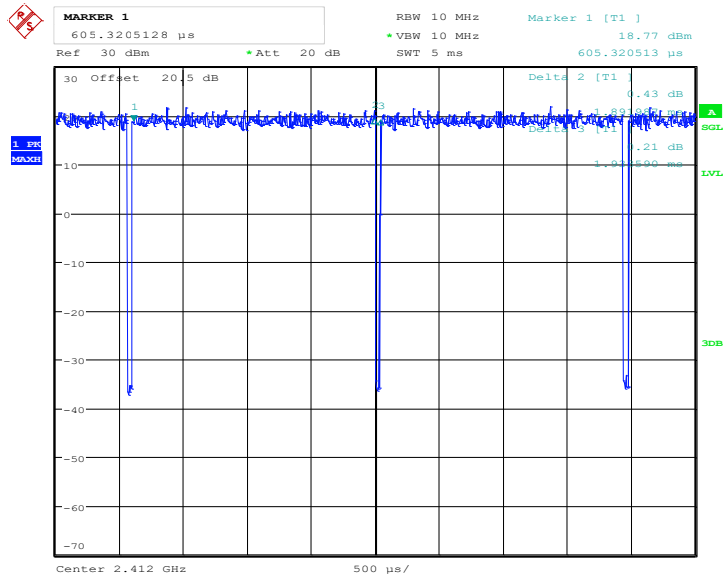

Date: 1.JAN.2003 08:25:17

802.11ac VHT20

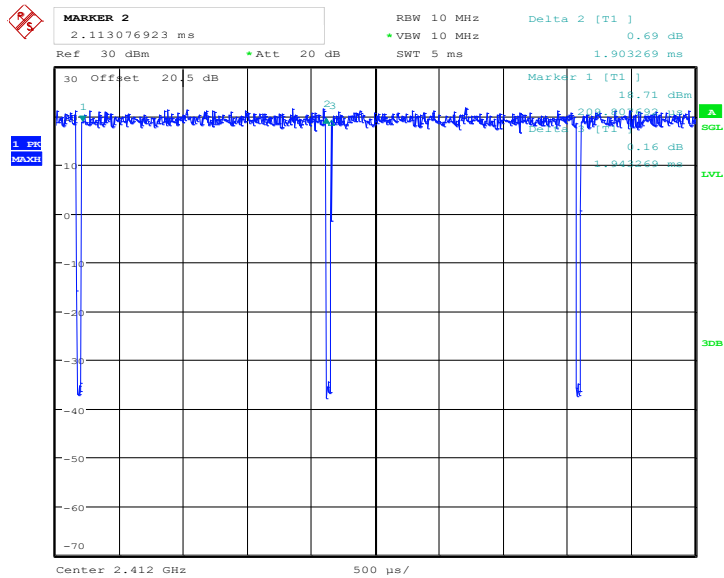

Date: 1.JAN.2003 08:52:15

— THE END —