



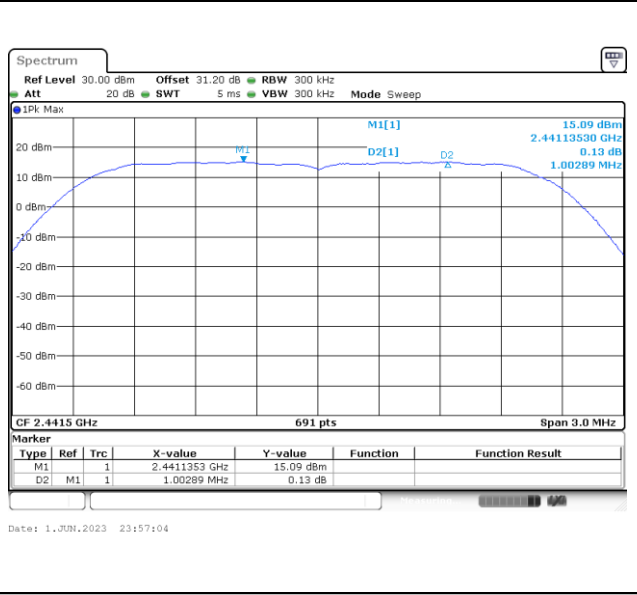



<2Mbps>

Channel Separation Plot on Channel 00 - 01

Channel Separation Plot on Channel 39 - 40

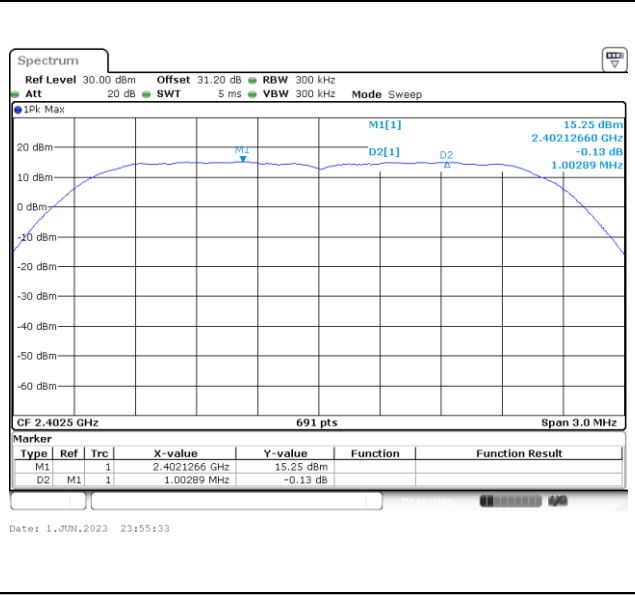

Channel Separation Plot on Channel 77 - 78


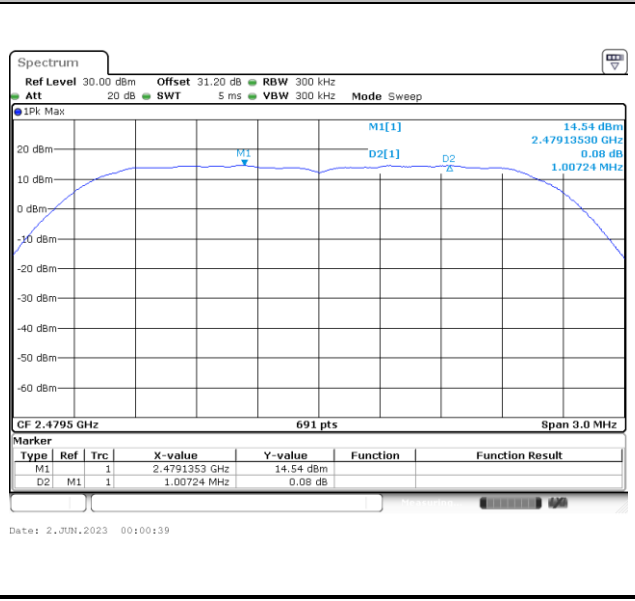





<3Mbps>

Channel Separation Plot on Channel 00 - 01


Channel Separation Plot on Channel 39 - 40

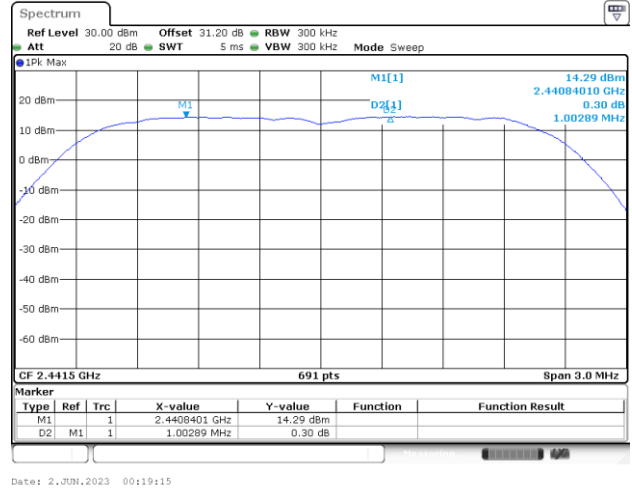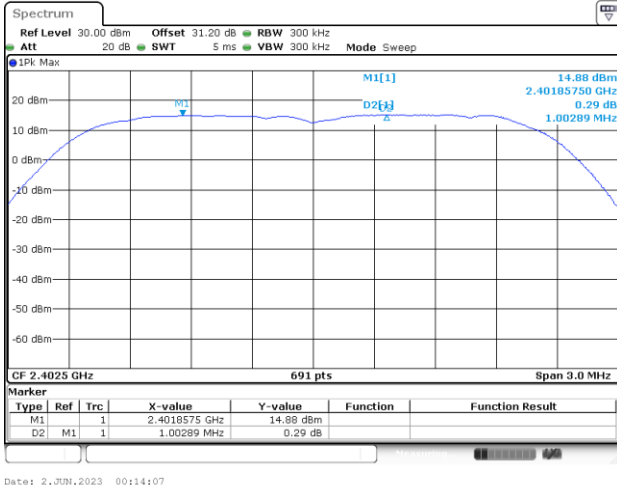

Channel Separation Plot on Channel 77 - 78

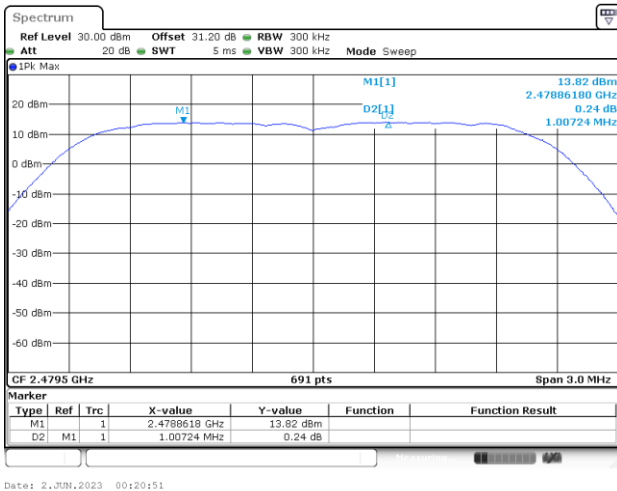

Dwell Time

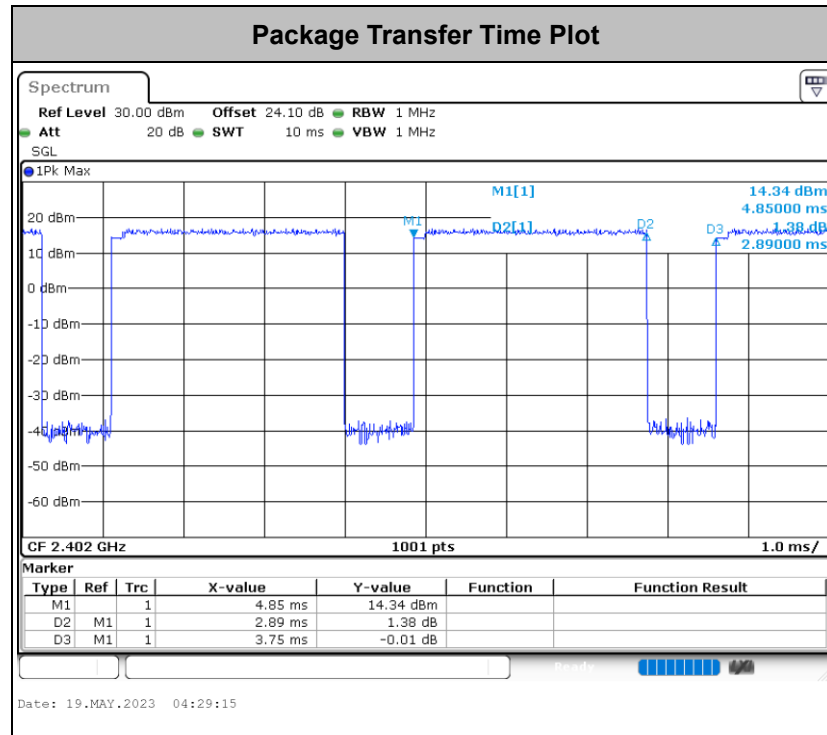

Remark:


1. In normal mode, hopping rate is 1600 hops/s with 6 slots in 79 hopping channels. With channel hopping rate (1600 / 6 / 79) in Occupancy Time Limit (0.4 x 79) (s), Hops Over Occupancy Time comes to (1600 / 6 / 79) x (0.4 x 79) = 106.67 hops.
2. In AFH mode, hopping rate is 800 hops/s with 6 slots in 20 hopping channels. With channel hopping rate (800 / 6 / 20) in Occupancy Time Limit (0.4 x 20) (s), Hops Over Occupancy Time comes to (800 / 6 / 20) x (0.4 x 20) = 53.33 hops.
3. Dwell Time(s) = Hops Over Occupancy Time (hops) x Package Transfer Time




20dB Bandwidth

<1Mbps>


20 dB Bandwidth Plot on Channel 00

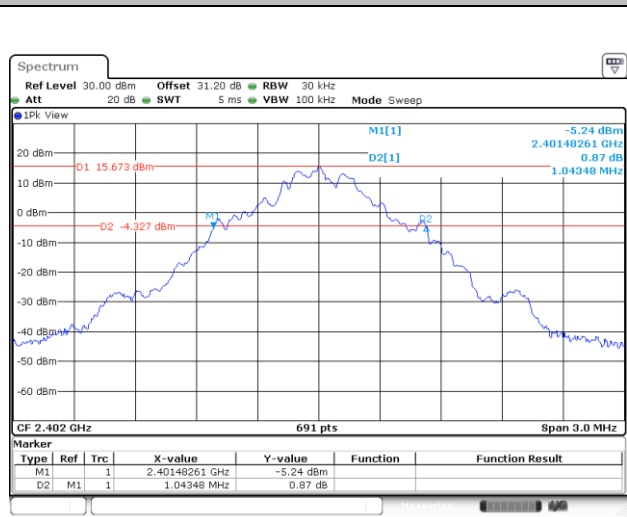

20 dB Bandwidth Plot on Channel 39

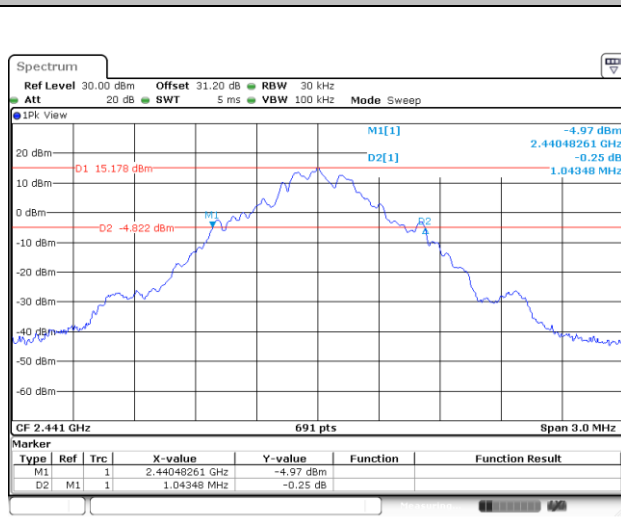


20 dB Bandwidth Plot on Channel 78

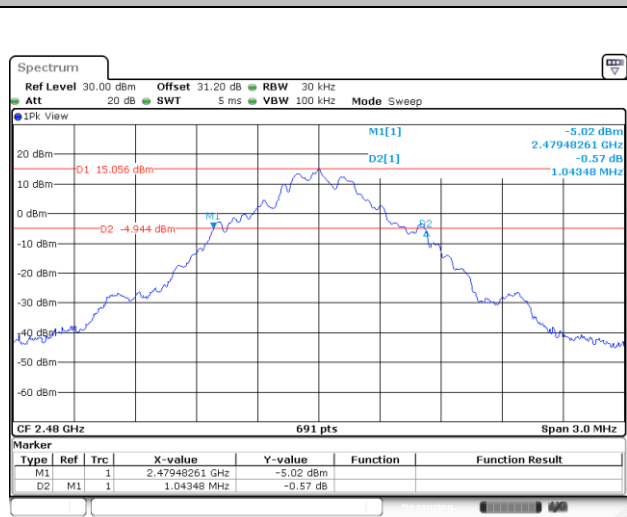




<2Mbps>


20 dB Bandwidth Plot on Channel 00

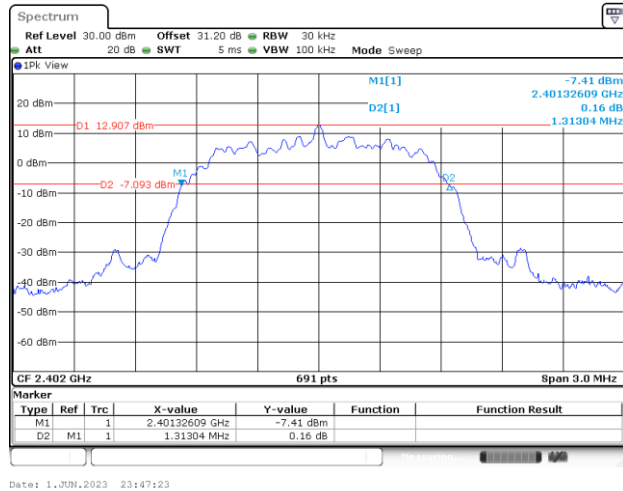

20 dB Bandwidth Plot on Channel 39

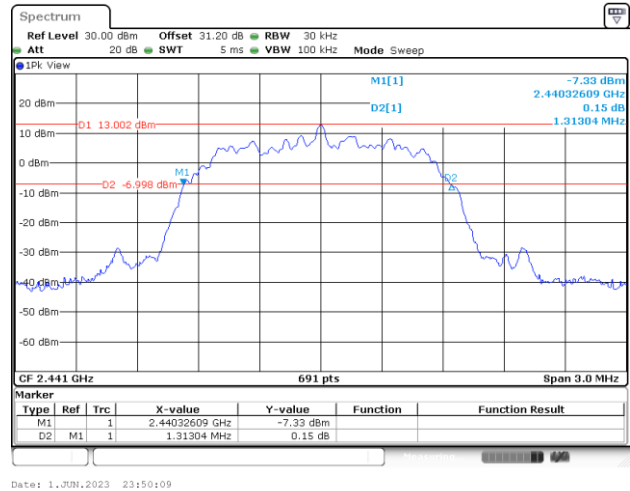


20 dB Bandwidth Plot on Channel 78

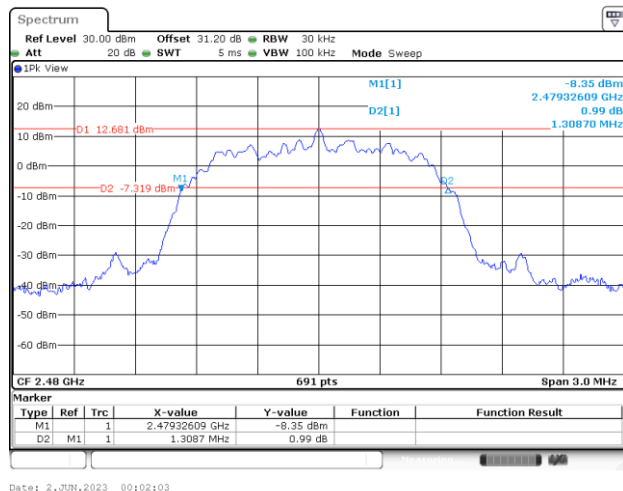




<3Mbps>

20 dB Bandwidth Plot on Channel 00

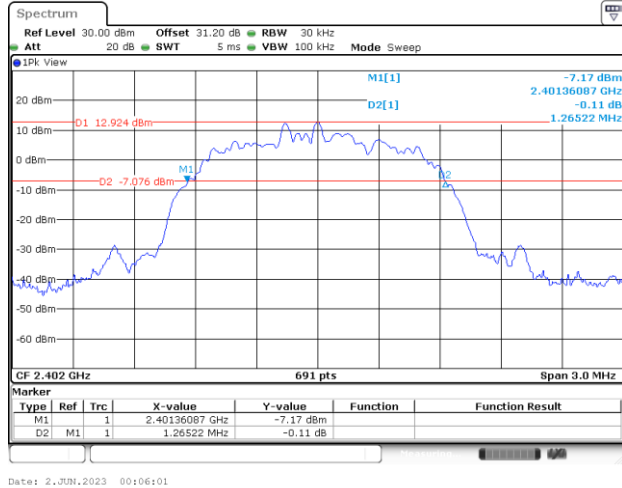


Date: 2 JUN 2023 00:06:01

20 dB Bandwidth Plot on Channel 39

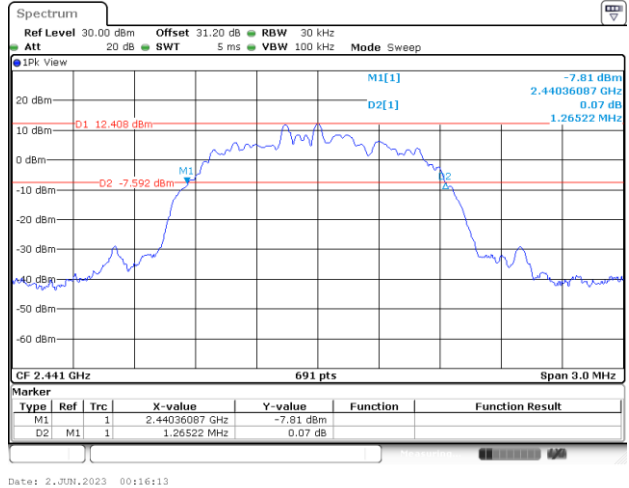

Date: 2 JUN 2023 00:16:13

20 dB Bandwidth Plot on Channel 78

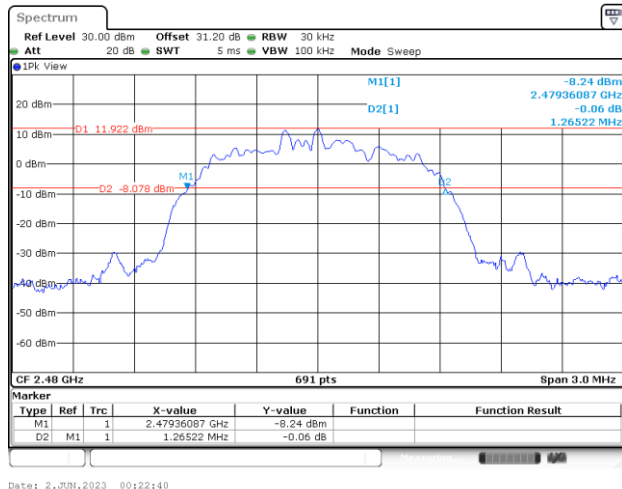


Date: 2 JUN 2023 00:22:40



99% Occupied Bandwidth

<1Mbps>


99% Occupied Bandwidth on Channel 00

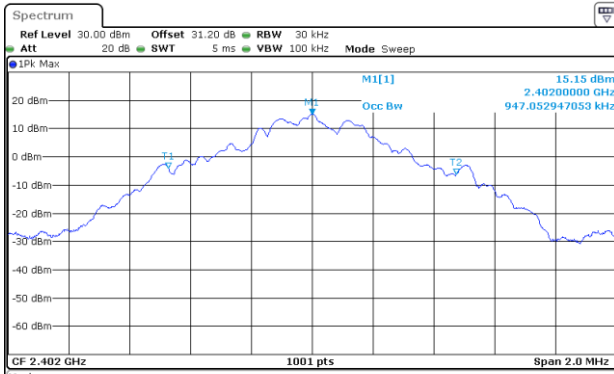

Marker	Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1	1			2.402 GHz	15.15 dBm		
T1	1			2.40152647 GHz	-3.93 dBm	Occ Bw	947.052947053 kHz
T2	1			2.40247353 GHz	-6.32 dBm		

Date: 1.JUN.2023 23:28:37


99% Occupied Bandwidth on Channel 39

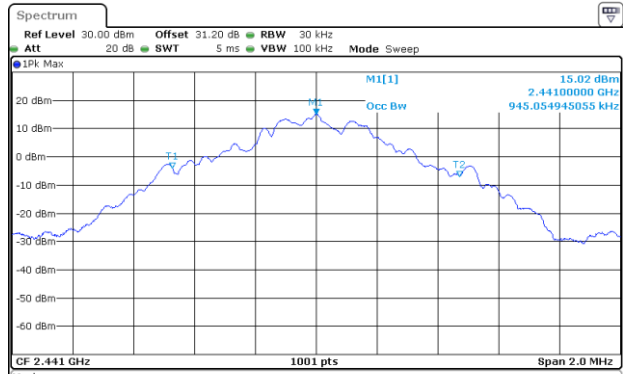

Marker	Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1	1			2.441 GHz	15.02 dBm		
T1	1			2.44052647 GHz	-4.01 dBm	Occ Bw	945.054945055 kHz
T2	1			2.44147153 GHz	-6.93 dBm		

Date: 1.JUN.2023 23:34:06

99% Occupied Bandwidth on Channel 78

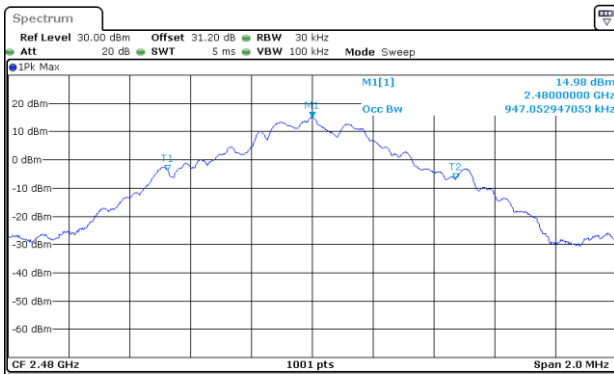


Marker	Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1	1			2.48 GHz	14.98 dBm		
T1	1			2.47952448 GHz	-3.74 dBm	Occ Bw	947.052947053 kHz
T2	1			2.48047153 GHz	-6.83 dBm		

Date: 1.JUN.2023 23:42:12




<2Mbps>

99% Occupied Bandwidth on Channel 00

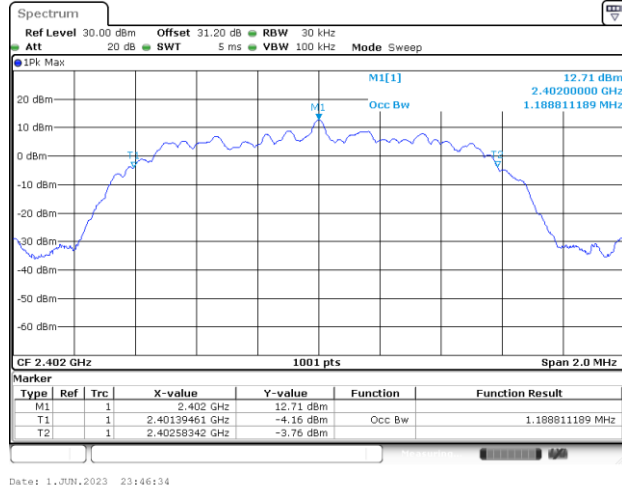


Date: 1 JUN 2023 23:46:34

99% Occupied Bandwidth on Channel 39

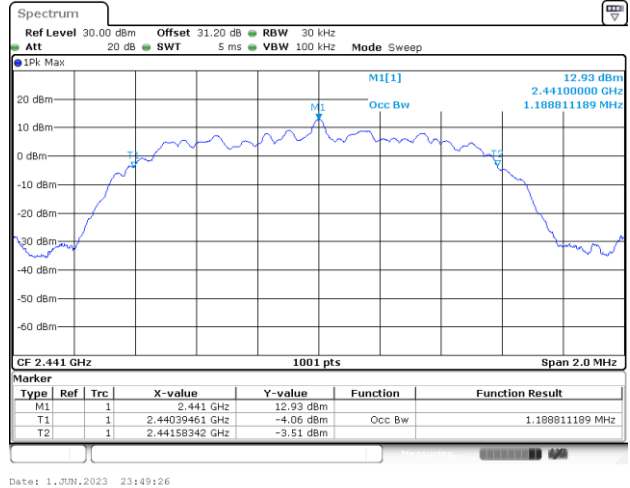

Date: 1 JUN 2023 23:49:26

99% Occupied Bandwidth on Channel 78

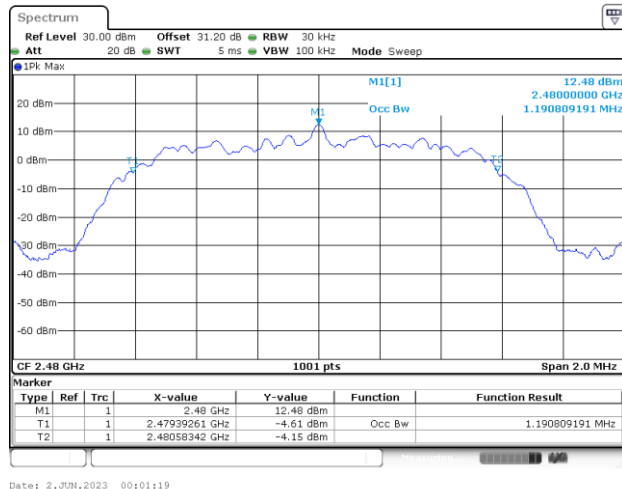


Date: 2 JUN 2023 00:01:19




<3Mbps>


99% Occupied Bandwidth on Channel 00

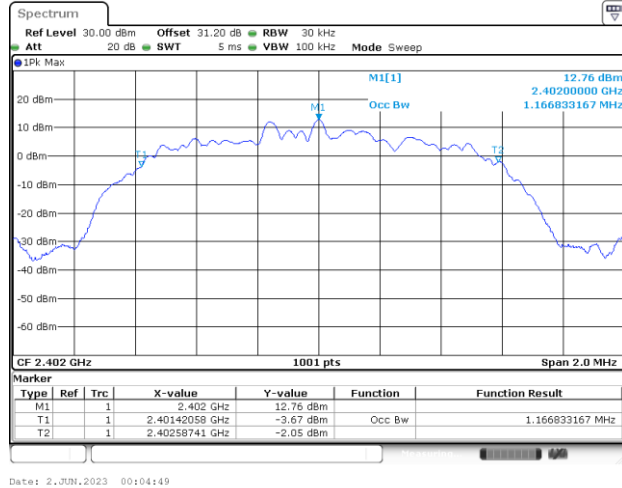

99% Occupied Bandwidth on Channel 39

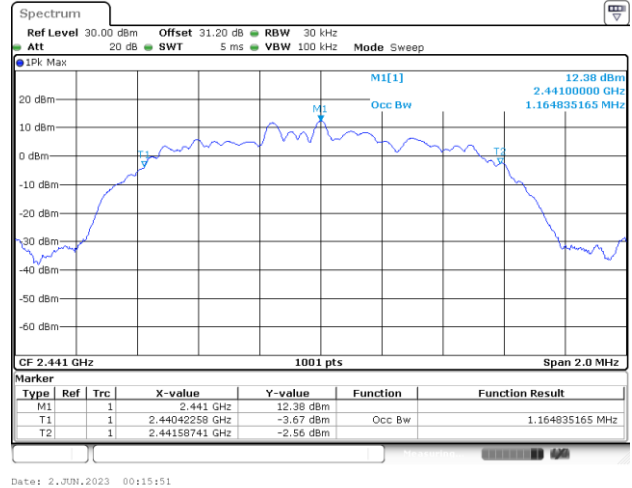

99% Occupied Bandwidth on Channel 78

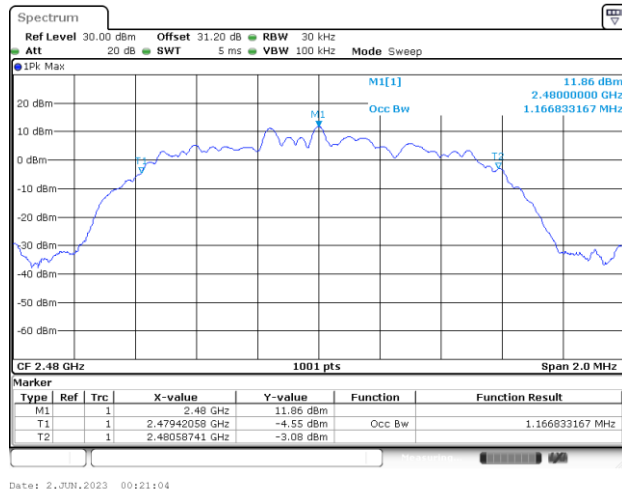


Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.




Band Edges

<1Mbps>

Low Band Edge Plot on Channel 00

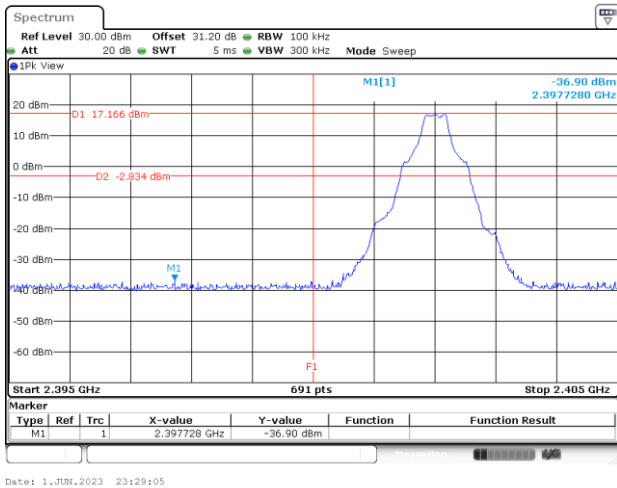


High Band Edge Plot on Channel 78

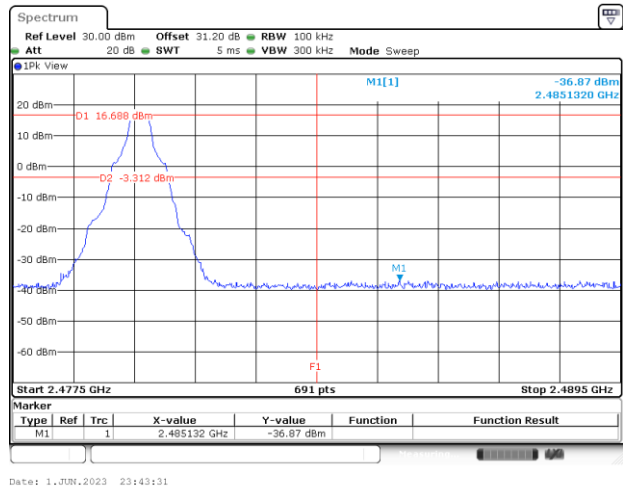


<2Mbps>

Low Band Edge Plot on Channel 00

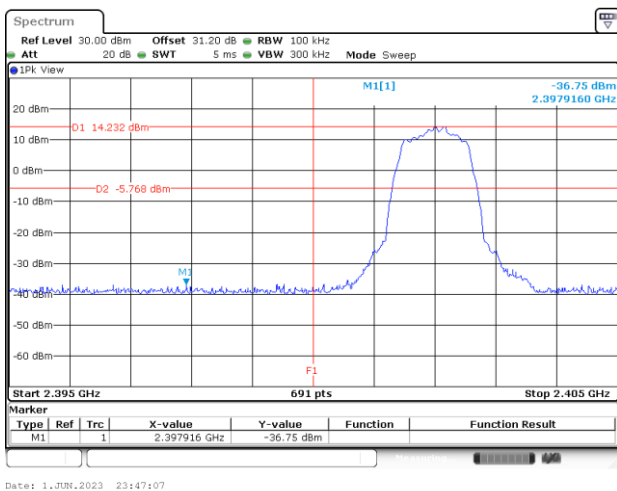

High Band Edge Plot on Channel 78


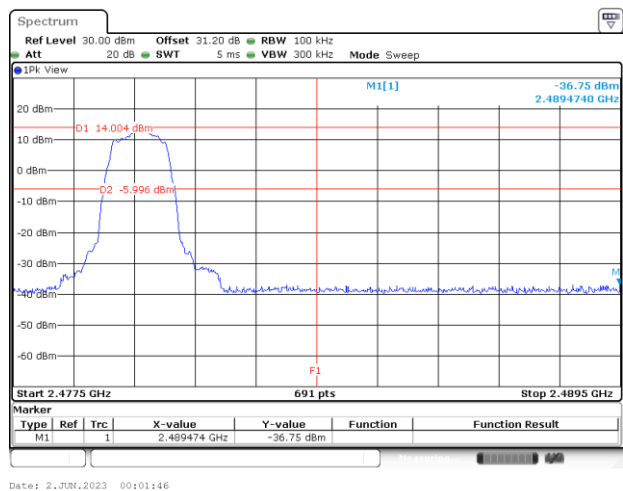




<3Mbps>

Low Band Edge Plot on Channel 00

High Band Edge Plot on Channel 78

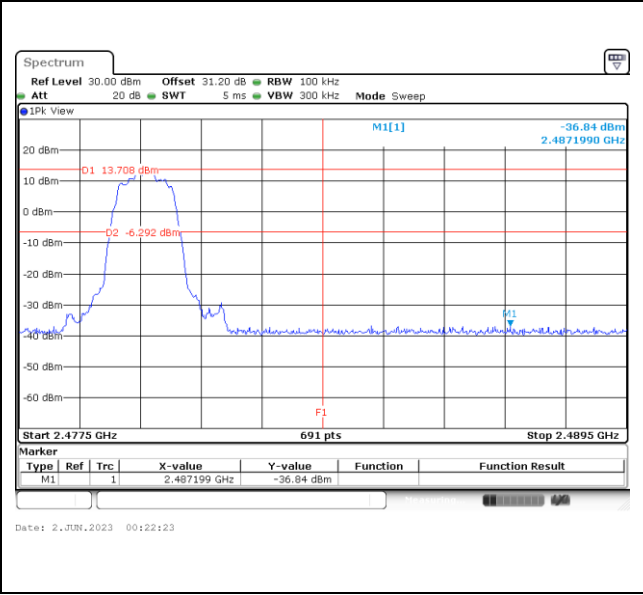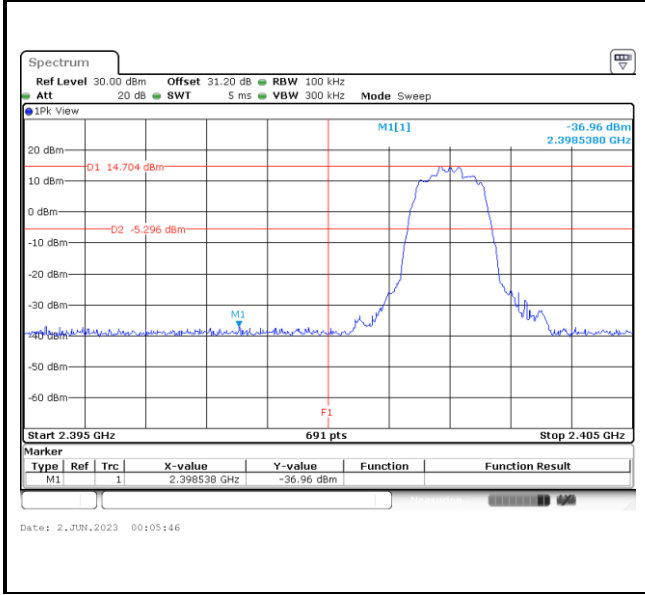





Hopping Mode Band Edges

<1Mbps>

Hopping Mode Low Band Edge Plot

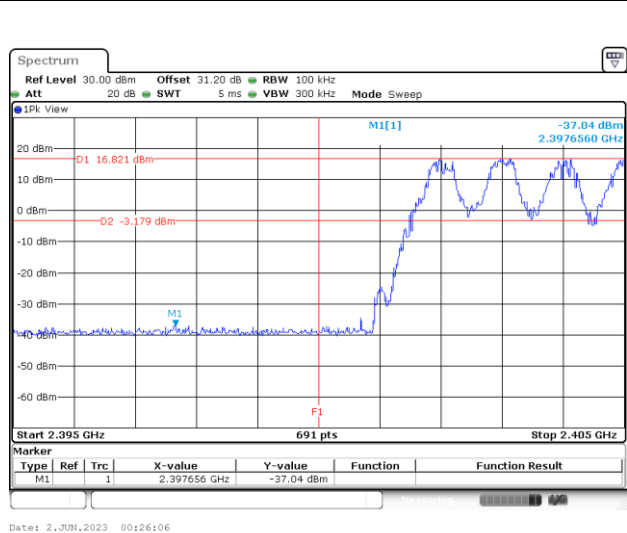


Hopping Mode High Band Edge Plot

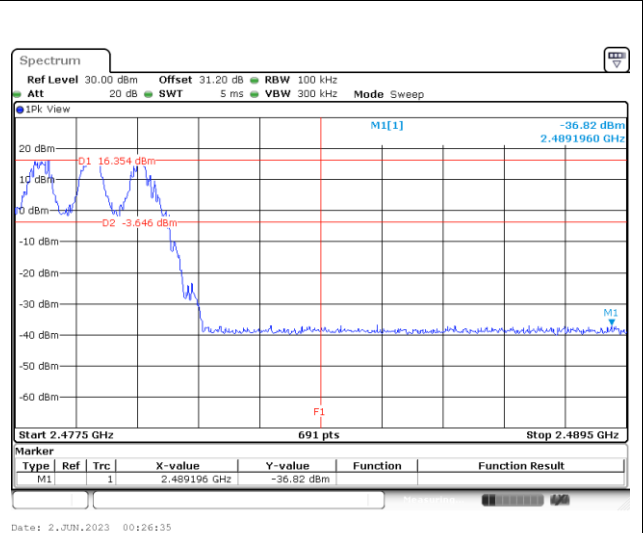


<2Mbps>

Hopping Mode Low Band Edge Plot

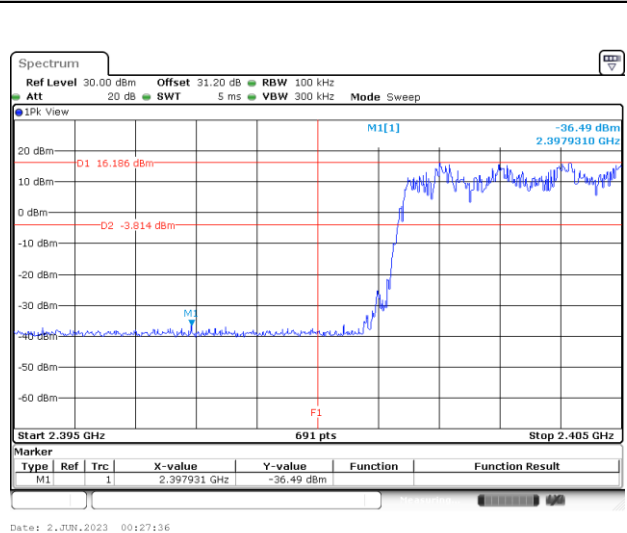


Hopping Mode High Band Edge Plot

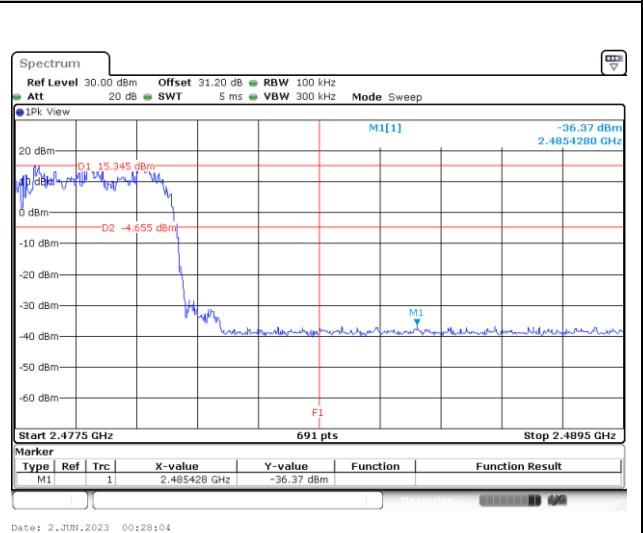




<3Mbps>

Hopping Mode Low Band Edge Plot

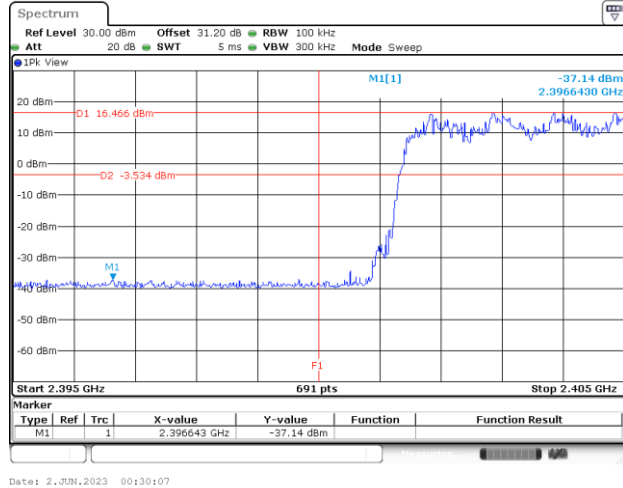

Hopping Mode High Band Edge Plot

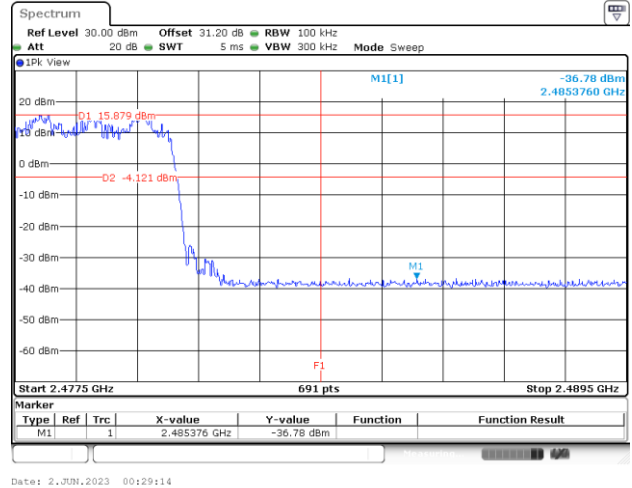




Spurious Emission


<1Mbps>

CSE Plot on Ch 00 between 30MHz ~ 1 GHz

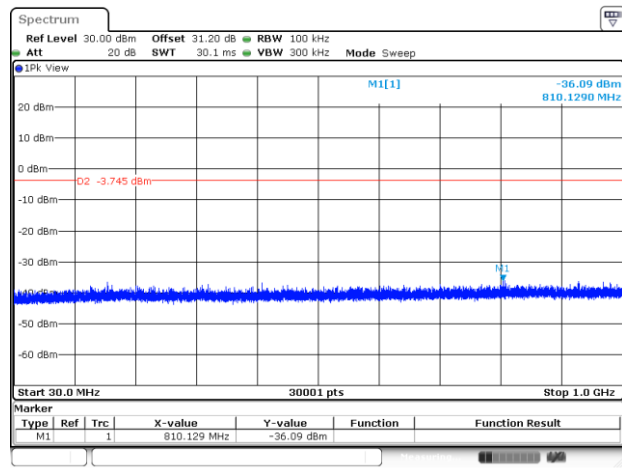


Date: 1.JUN.2023 23:30:59

CSE Plot on Ch 00 between 1 GHz ~ 26.5 GHz

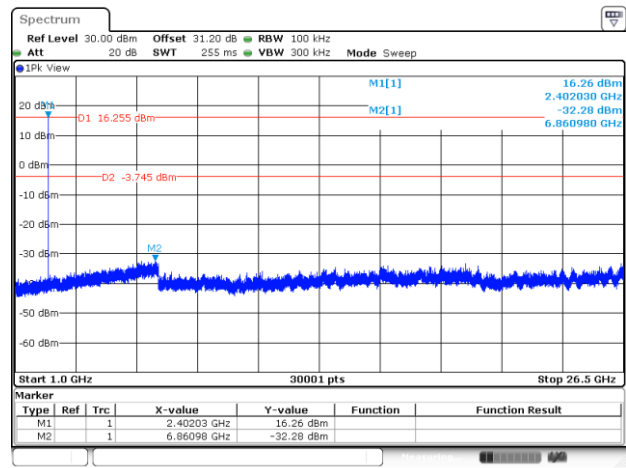


Date: 1.JUN.2023 23:30:22

CSE Plot on Ch 39 between 30MHz ~ 1 GHz

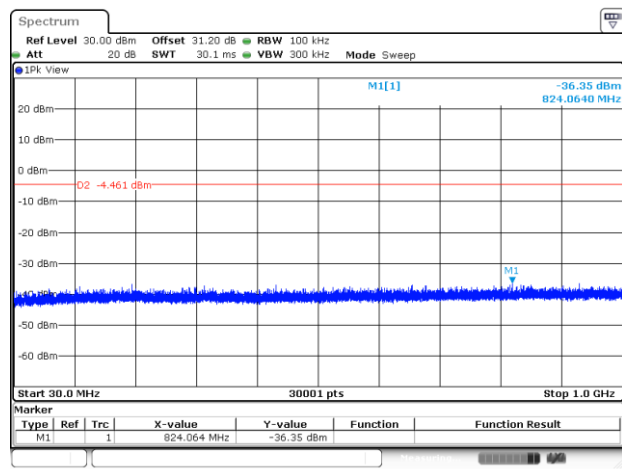

Date: 1.JUN.2023 23:35:33


CSE Plot on Ch 39 between 1 GHz ~ 26.5 GHz

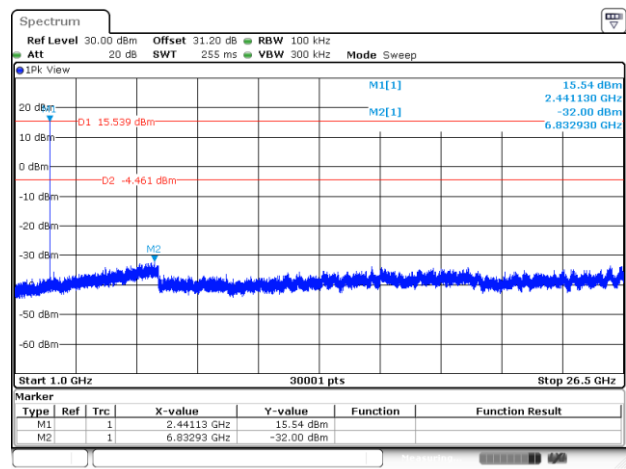


Date: 1.JUN.2023 23:35:05



CSE Plot on Ch 78 between 30MHz ~ 1 GHz

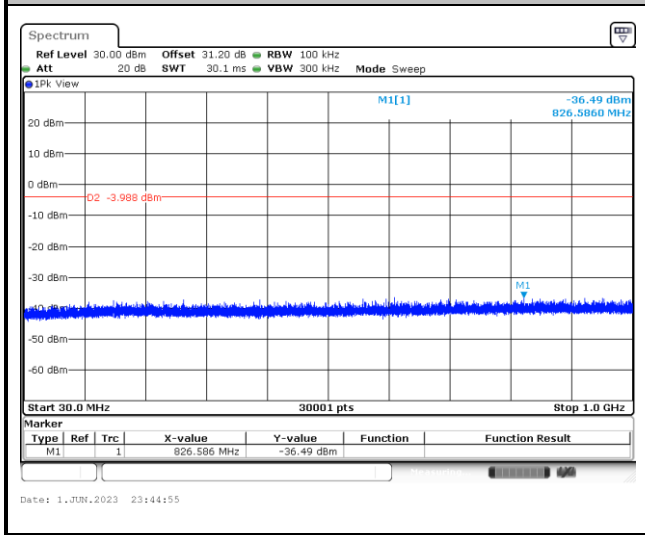


CSE Plot on Ch 78 between 1 GHz ~ 26.5 GHz

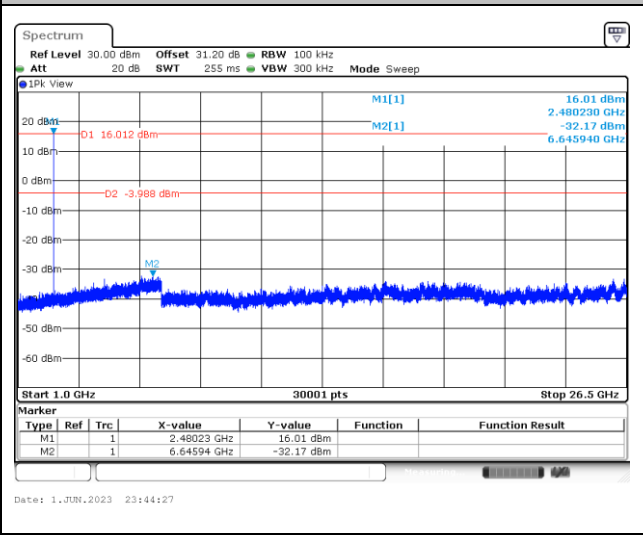




<2Mbps>


CSE Plot on Ch 00 between 30MHz ~ 1 GHz

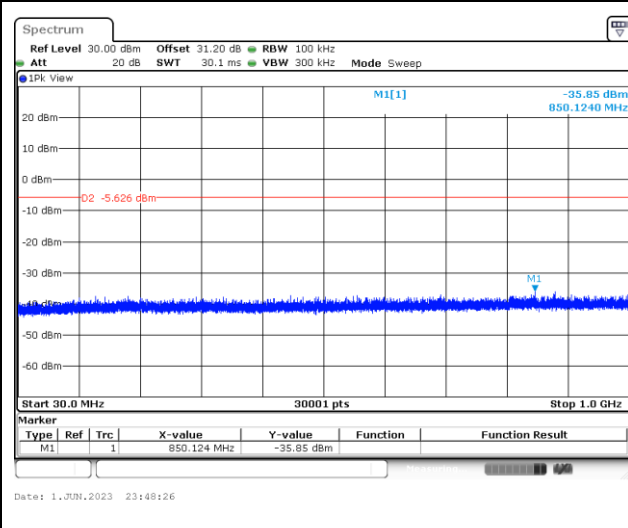


CSE Plot on Ch 00 between 1 GHz ~ 26.5 GHz

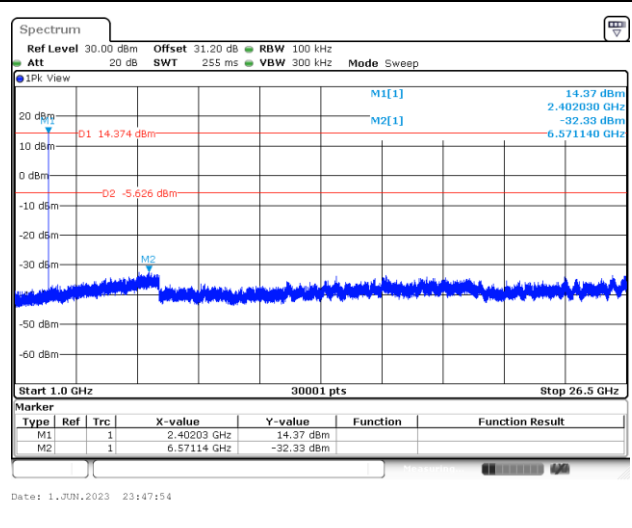

CSE Plot on Ch 39 between 30MHz ~ 1 GHz

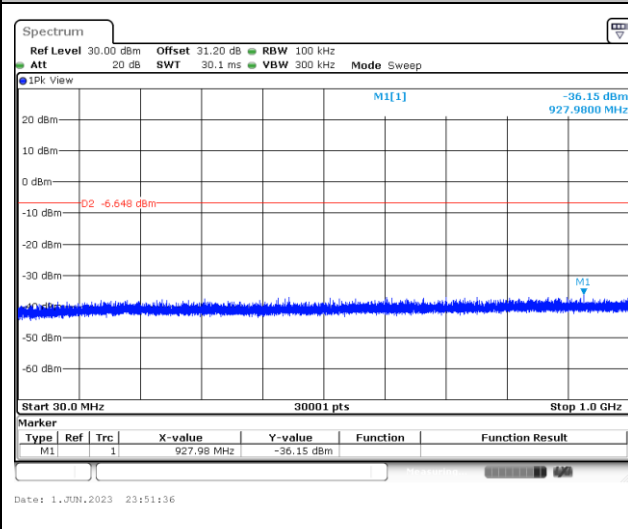


CSE Plot on Ch 39 between 1 GHz ~ 26.5 GHz

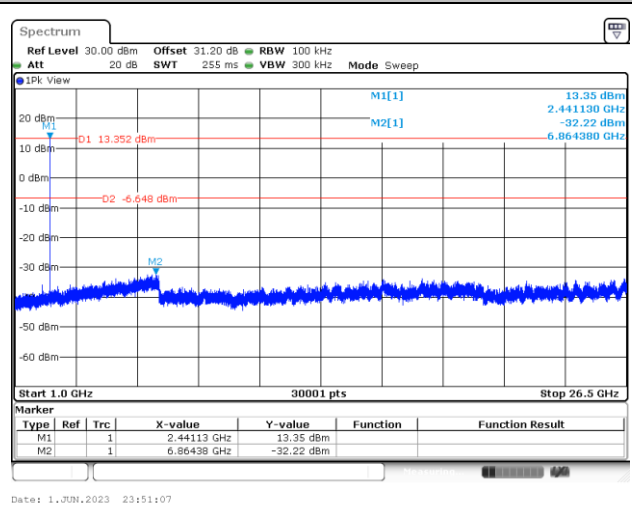




CSE Plot on Ch 78 between 30MHz ~ 1 GHz

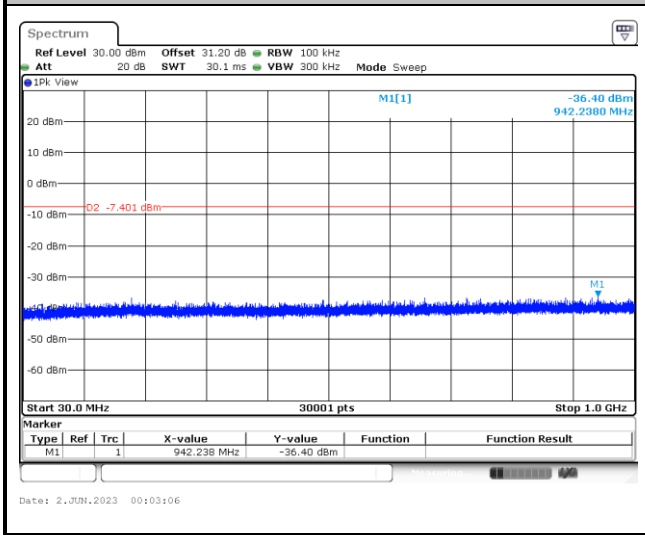


CSE Plot on Ch 78 between 1 GHz ~ 26.5 GHz

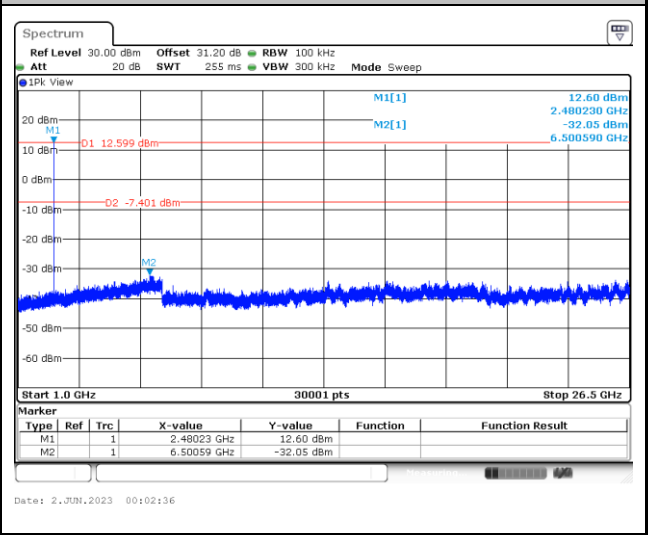




<3Mbps>


CSE Plot on Ch 00 between 30MHz ~ 1 GHz

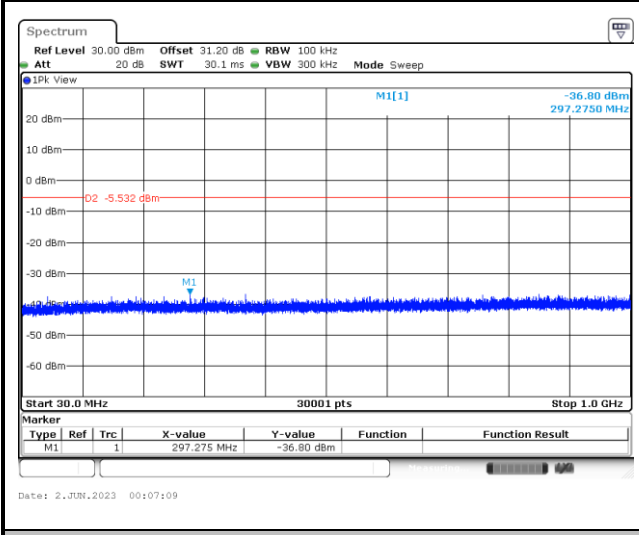


CSE Plot on Ch 00 between 1 GHz ~ 26.5 GHz

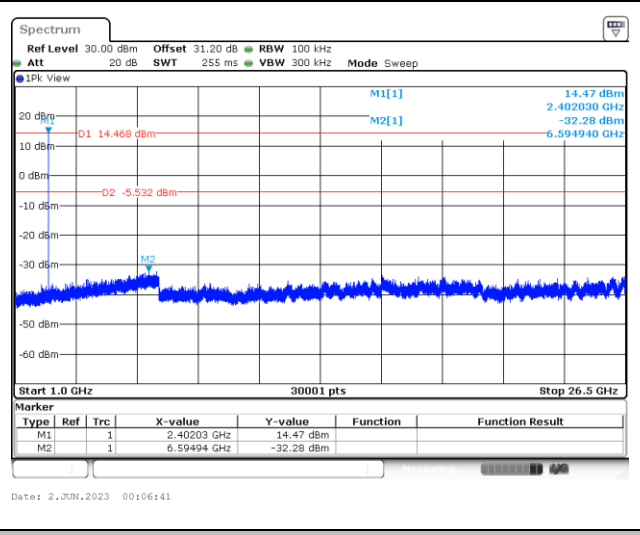

CSE Plot on Ch 39 between 30MHz ~ 1 GHz

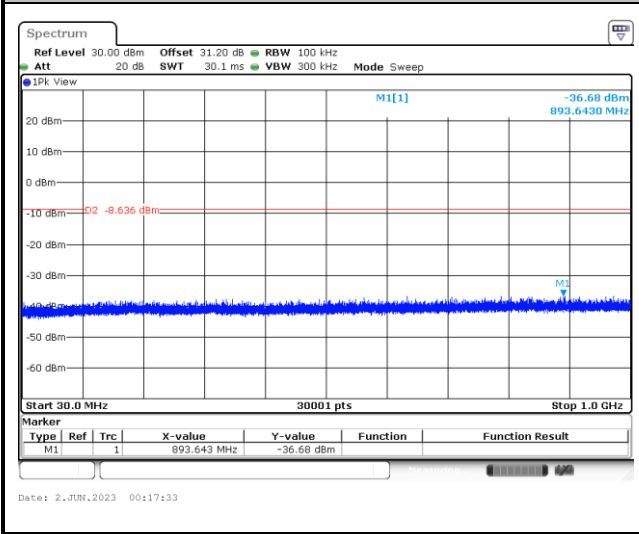


CSE Plot on Ch 39 between 1 GHz ~ 26.5 GHz

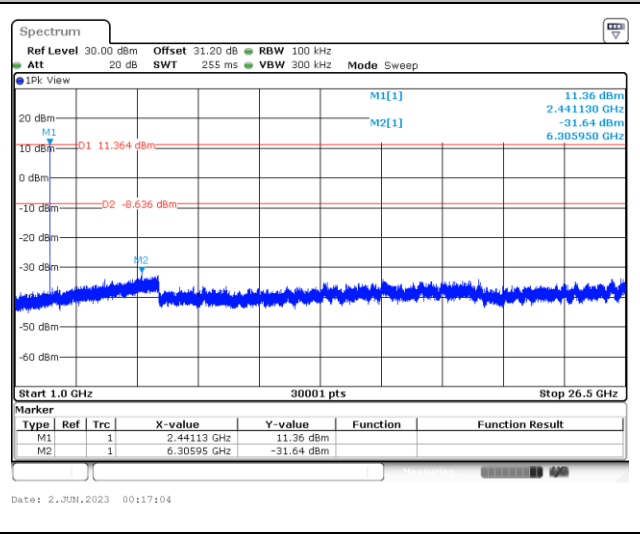




CSE Plot on Ch 78 between 30MHz ~ 1 GHz

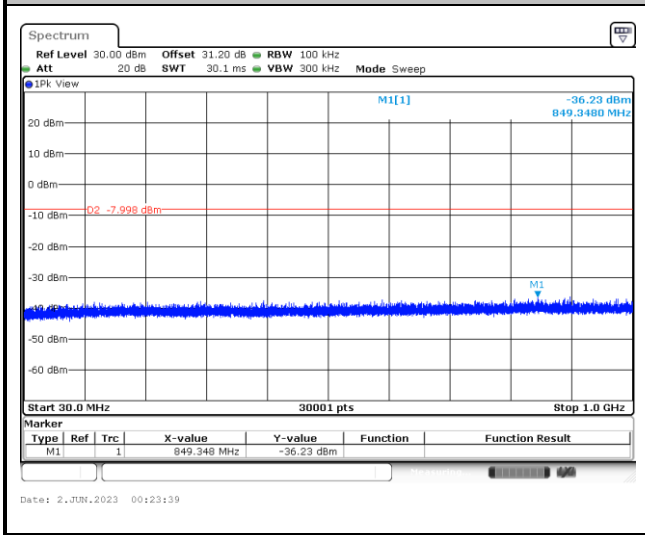


CSE Plot on Ch 78 between 1 GHz ~ 26.5 GHz

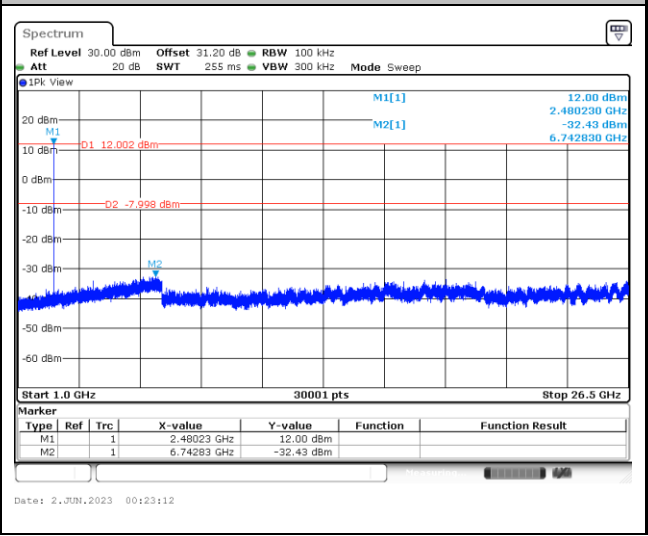



< TXBF HR 2Mbps Ant.3 >

Number of Hopping Frequency


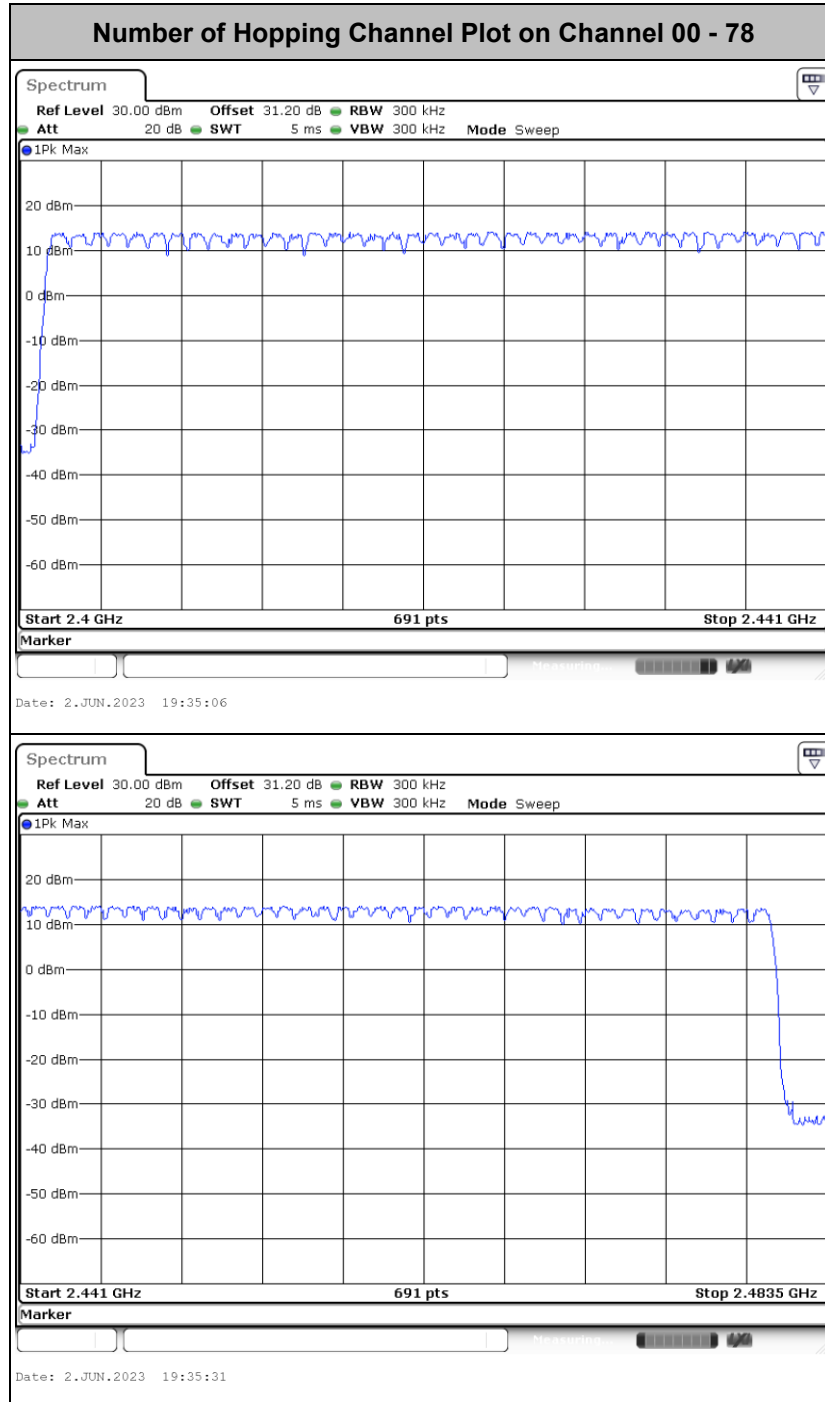






<2Mbps>

Channel Separation Plot on Channel 00 - 01

Channel Separation Plot on Channel 39 - 40

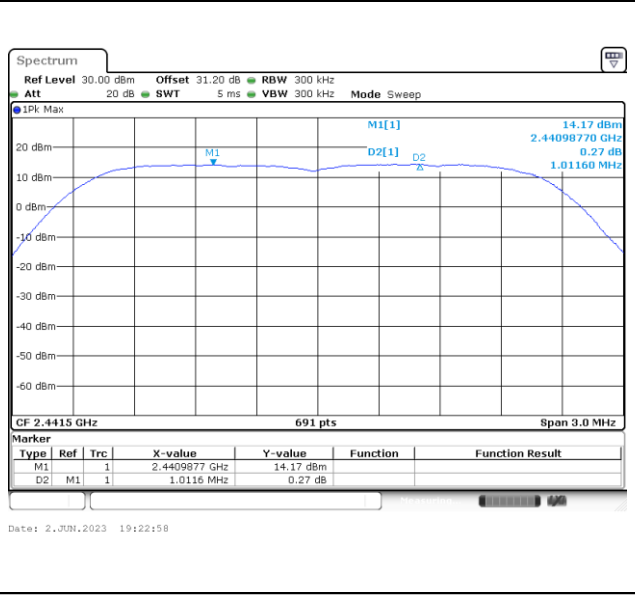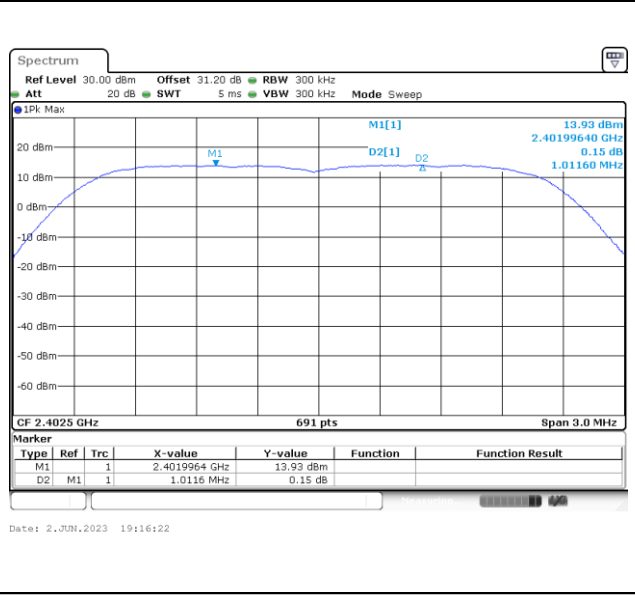


Channel Separation Plot on Channel 77 - 78

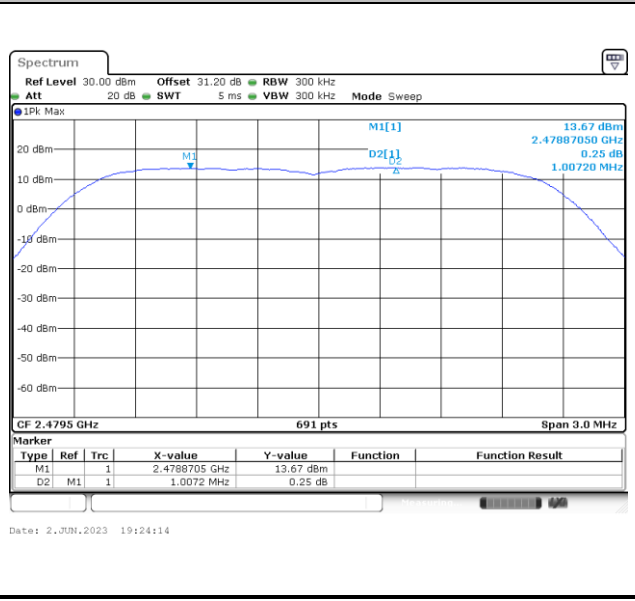



Dwell Time

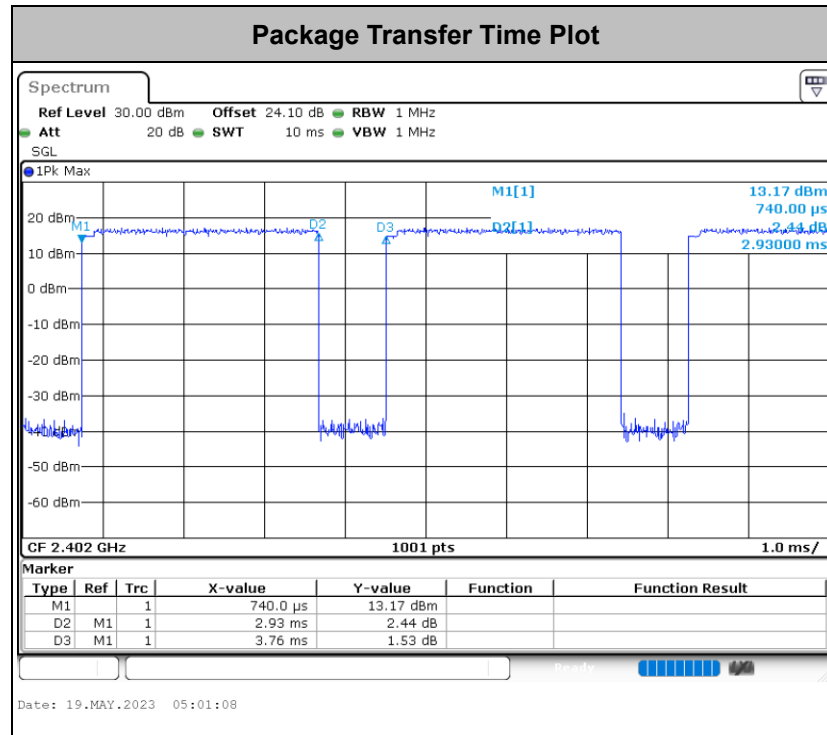

Remark:


1. In normal mode, hopping rate is 1600 hops/s with 6 slots in 79 hopping channels. With channel hopping rate (1600 / 6 / 79) in Occupancy Time Limit (0.4 x 79) (s), Hops Over Occupancy Time comes to (1600 / 6 / 79) x (0.4 x 79) = 106.67 hops.
2. In AFH mode, hopping rate is 800 hops/s with 6 slots in 20 hopping channels. With channel hopping rate (800 / 6 / 20) in Occupancy Time Limit (0.4 x 20) (s), Hops Over Occupancy Time comes to (800 / 6 / 20) x (0.4 x 20) = 53.33 hops.
3. Dwell Time(s) = Hops Over Occupancy Time (hops) x Package Transfer Time




20dB Bandwidth

<2Mbps>


20 dB Bandwidth Plot on Channel 00

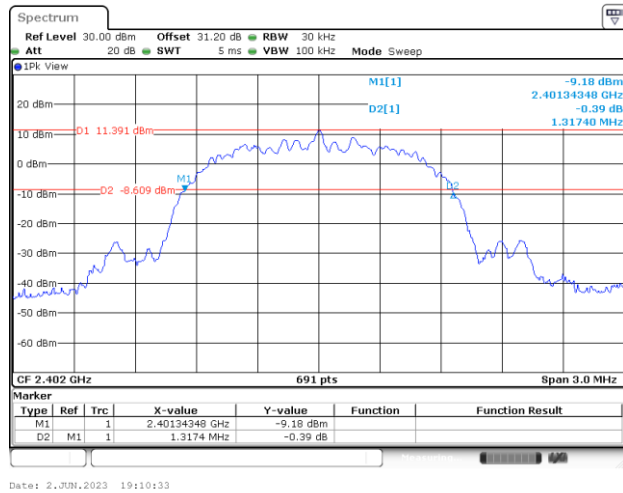

20 dB Bandwidth Plot on Channel 39

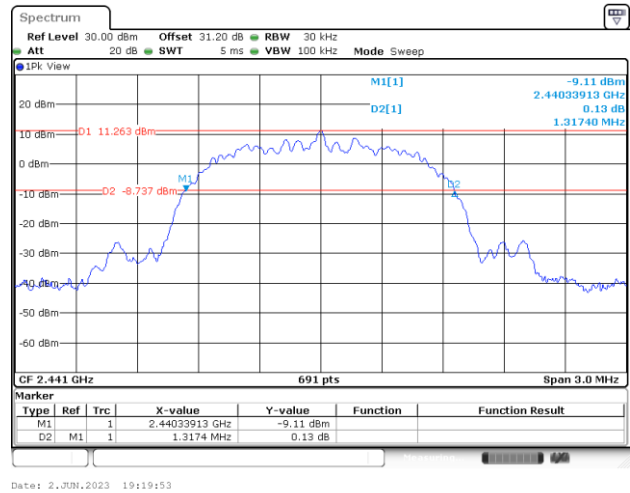

20 dB Bandwidth Plot on Channel 78

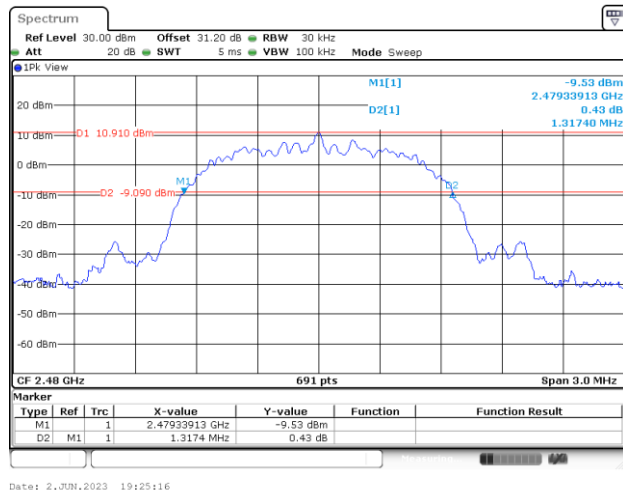





99% Occupied Bandwidth

<2Mbps>


99% Occupied Bandwidth on Channel 00

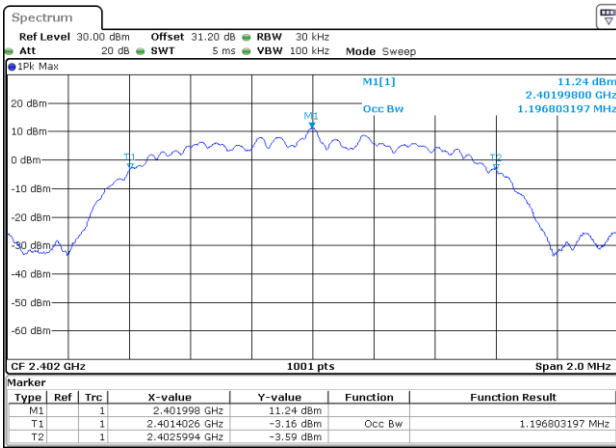

99% Occupied Bandwidth on Channel 39

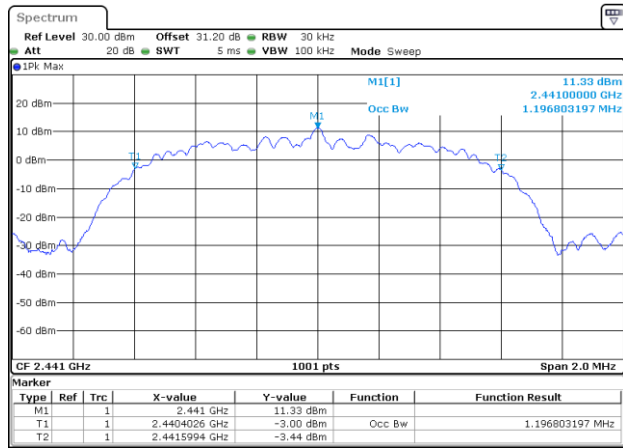

99% Occupied Bandwidth on Channel 78

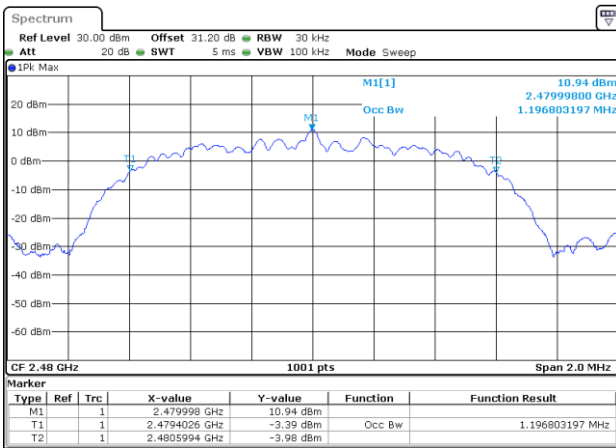


Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.




Band Edges

<2Mbps>

Low Band Edge Plot on Channel 00

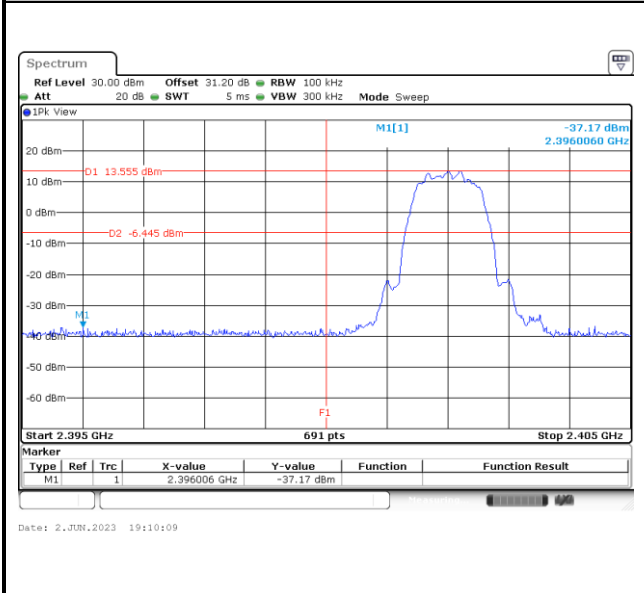

High Band Edge Plot on Channel 78

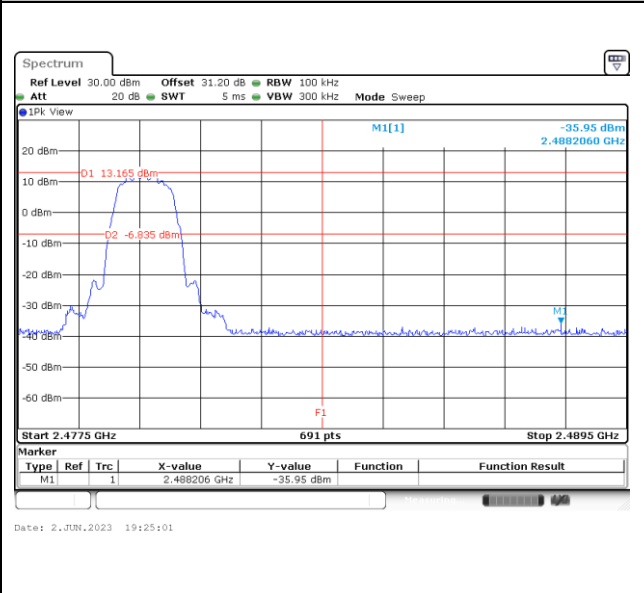





Hopping Mode Band Edges

<2Mbps>

Hopping Mode Low Band Edge Plot

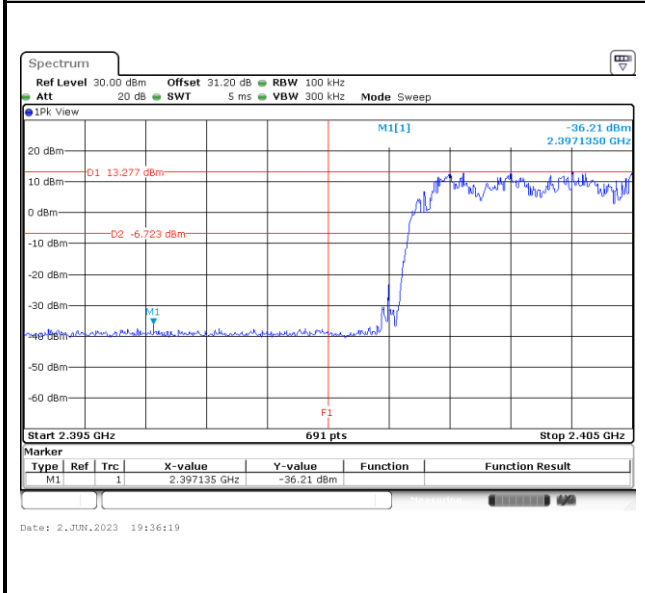

Hopping Mode High Band Edge Plot

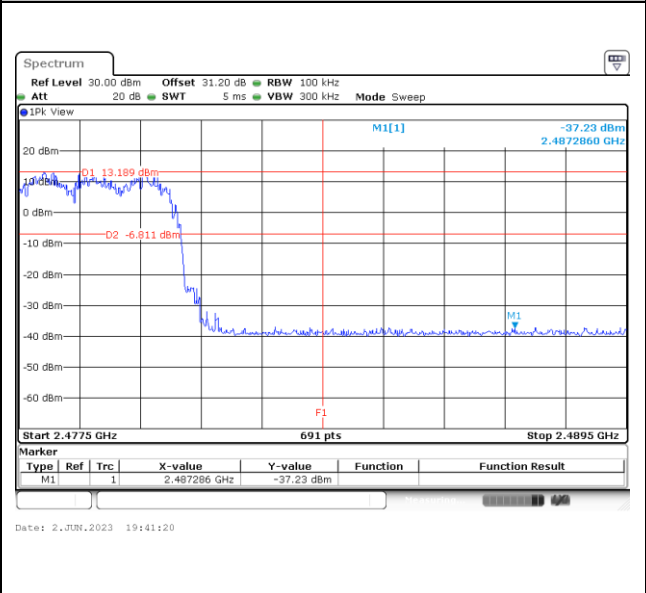





Spurious Emission

<2Mbps>


CSE Plot on Ch 00 between 30MHz ~ 1 GHz

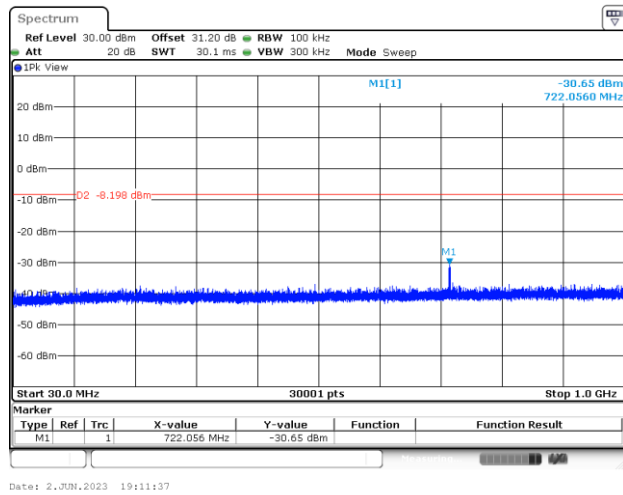


CSE Plot on Ch 00 between 1 GHz ~ 26.5 GHz

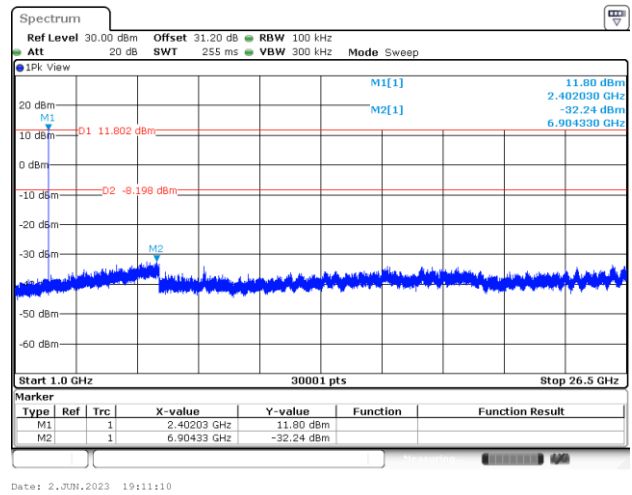

CSE Plot on Ch 39 between 30MHz ~ 1 GHz

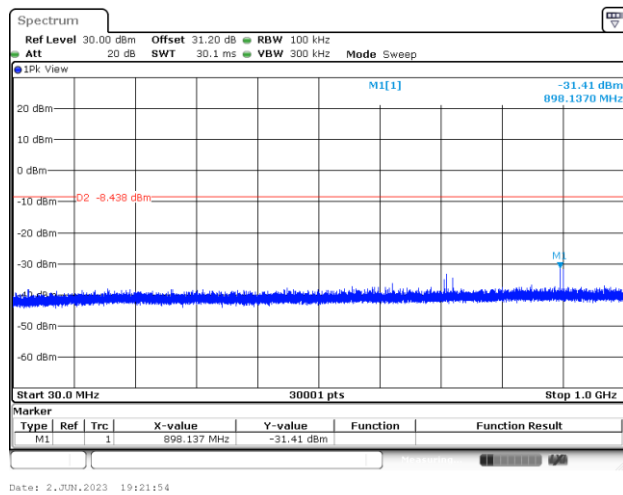


CSE Plot on Ch 39 between 1 GHz ~ 26.5 GHz

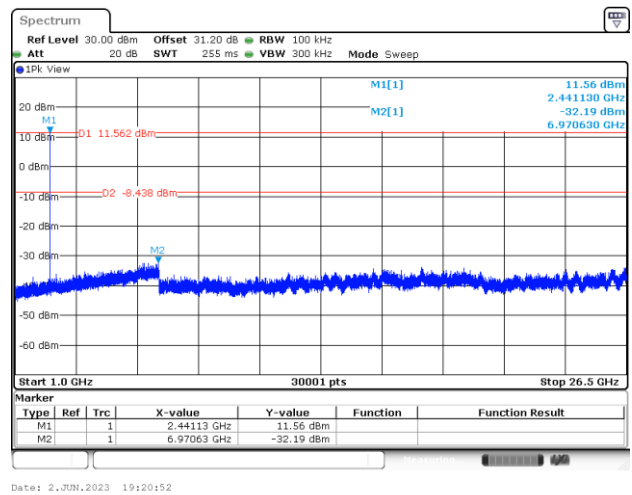




CSE Plot on Ch 78 between 30MHz ~ 1 GHz

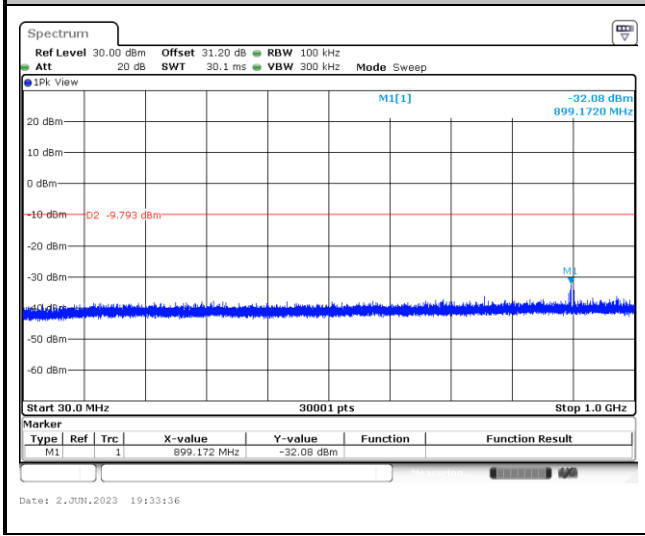


CSE Plot on Ch 78 between 1 GHz ~ 26.5 GHz

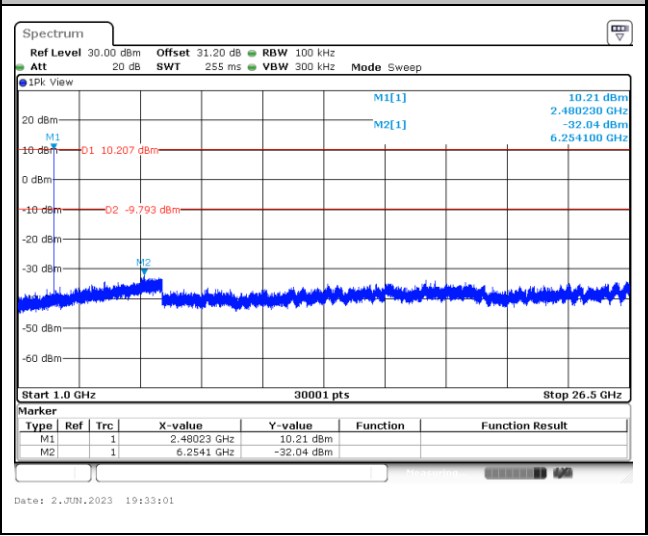



< TXBF HR 2Mbps Ant.4 >

Number of Hopping Frequency


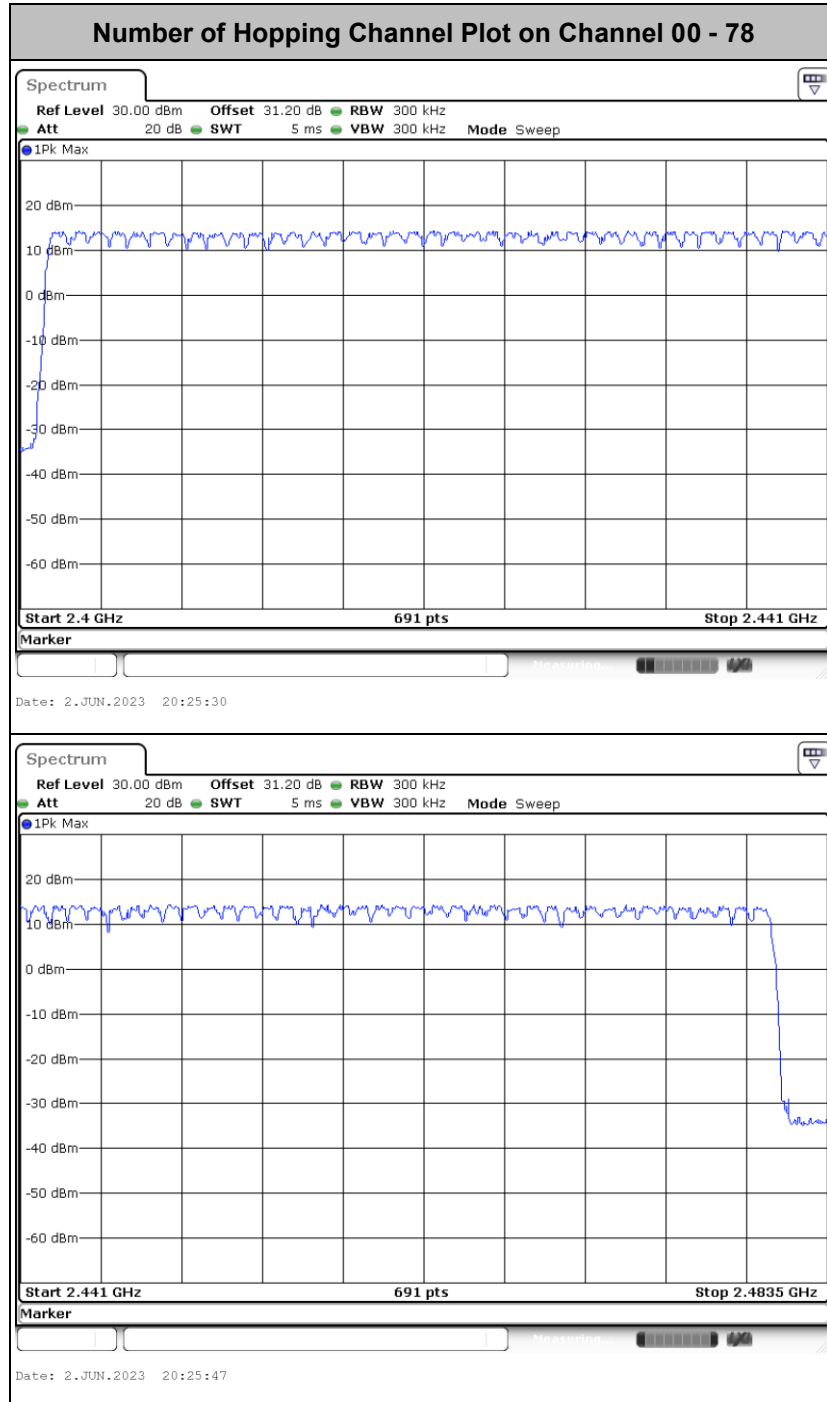





<2Mbps>

Channel Separation Plot on Channel 00 - 01

Channel Separation Plot on Channel 39 - 40

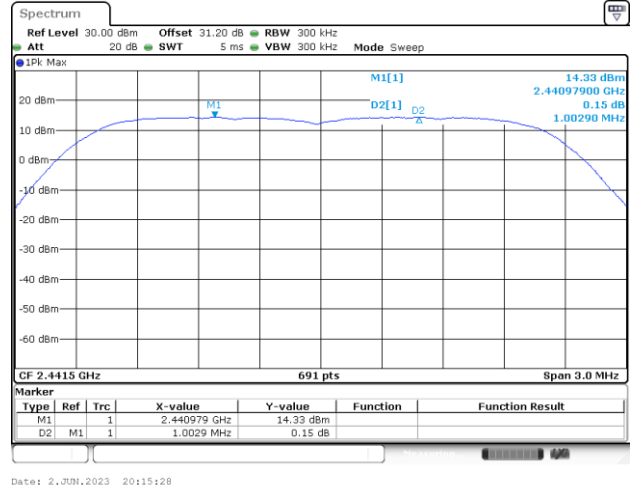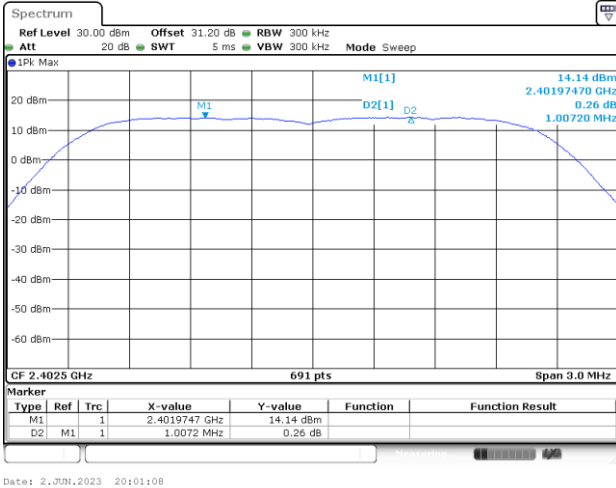


Channel Separation Plot on Channel 77 - 78

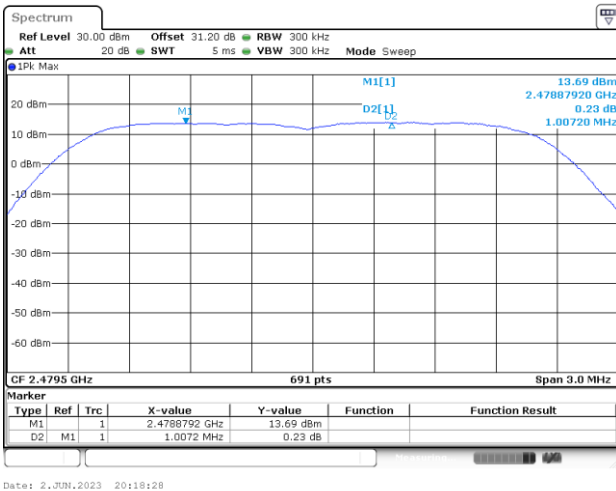



Dwell Time

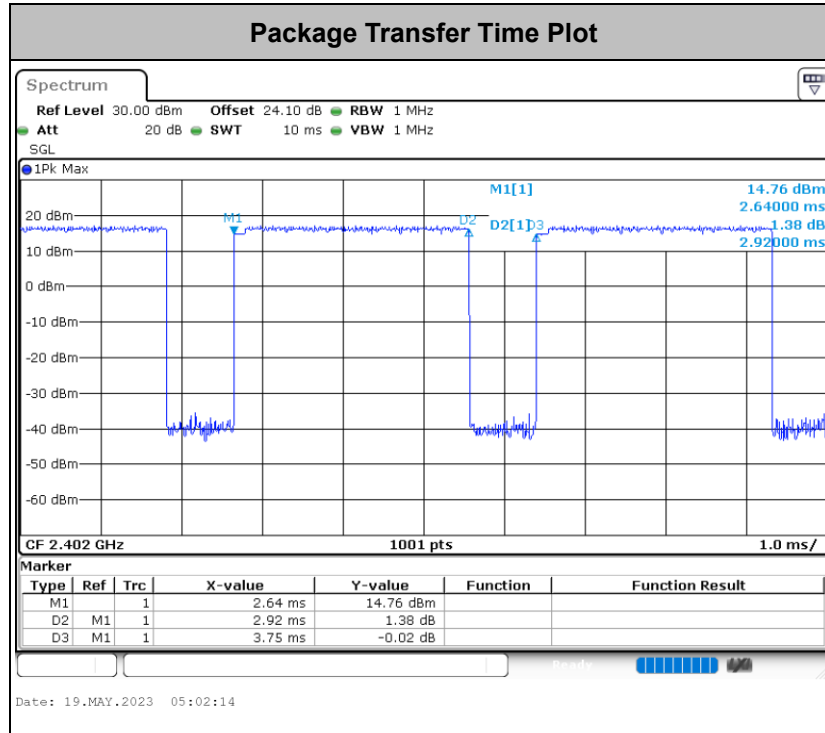

Remark:


1. In normal mode, hopping rate is 1600 hops/s with 6 slots in 79 hopping channels. With channel hopping rate (1600 / 6 / 79) in Occupancy Time Limit (0.4 x 79) (s), Hops Over Occupancy Time comes to (1600 / 6 / 79) x (0.4 x 79) = 106.67 hops.
2. In AFH mode, hopping rate is 800 hops/s with 6 slots in 20 hopping channels. With channel hopping rate (800 / 6 / 20) in Occupancy Time Limit (0.4 x 20) (s), Hops Over Occupancy Time comes to (800 / 6 / 20) x (0.4 x 20) = 53.33 hops.
3. Dwell Time(s) = Hops Over Occupancy Time (hops) x Package Transfer Time




20dB Bandwidth

<2Mbps>


20 dB Bandwidth Plot on Channel 00

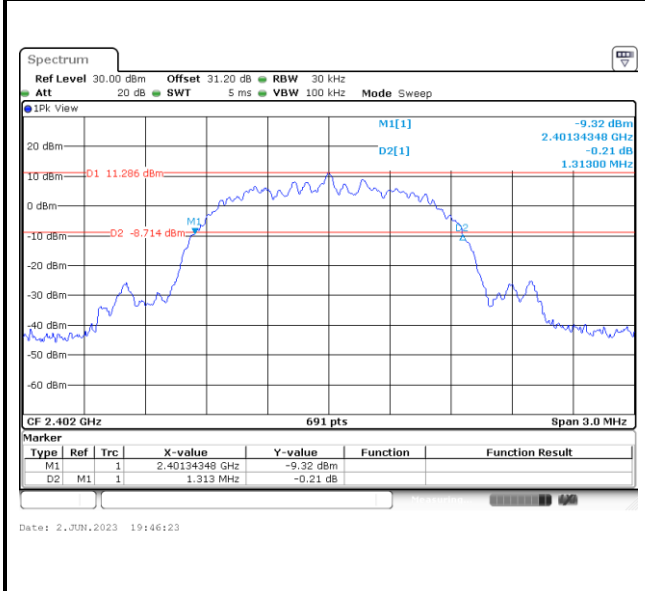

20 dB Bandwidth Plot on Channel 39

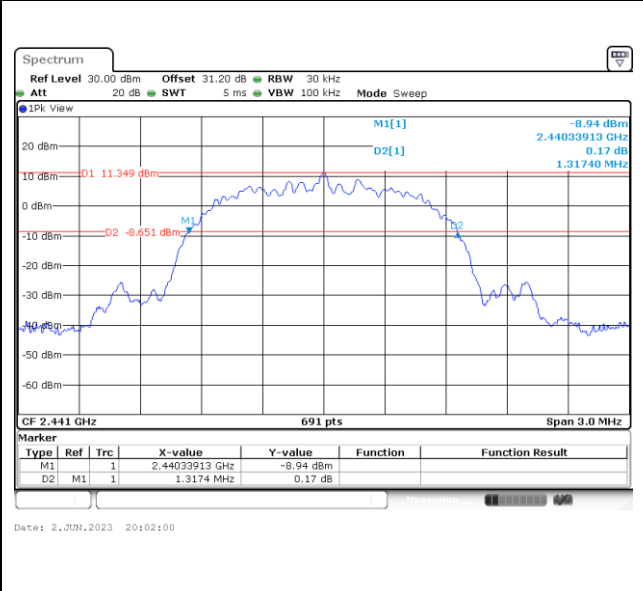

20 dB Bandwidth Plot on Channel 78

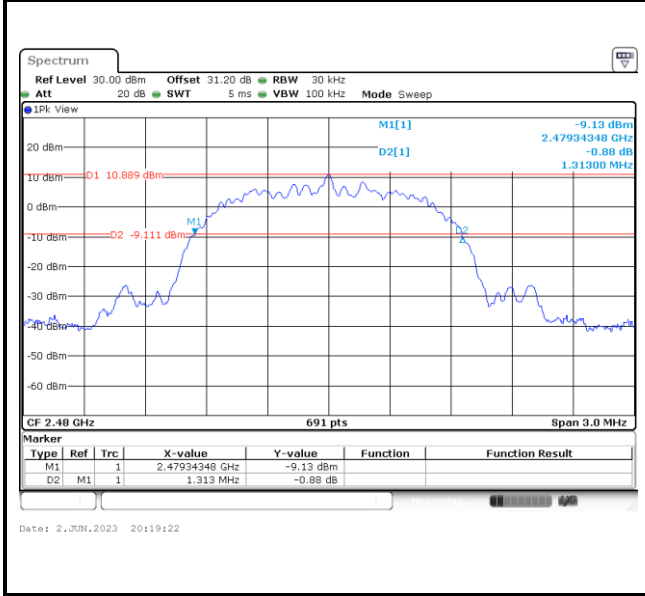




99% Occupied Bandwidth


<2Mbps>

99% Occupied Bandwidth on Channel 00

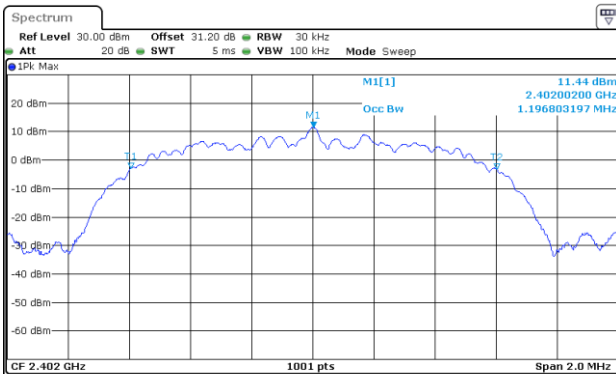


Date: 2 JUN 2023 19:44:03

99% Occupied Bandwidth on Channel 39

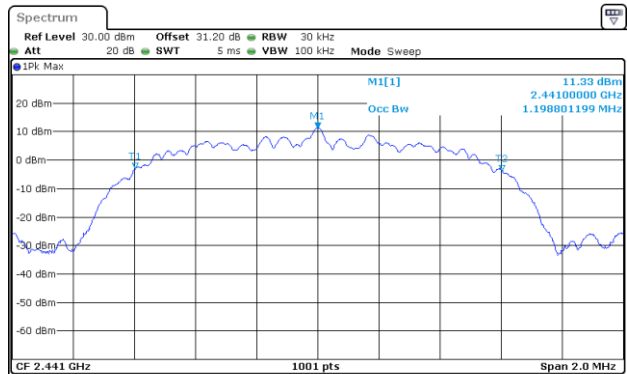

Date: 2 JUN 2023 20:01:42

99% Occupied Bandwidth on Channel 78

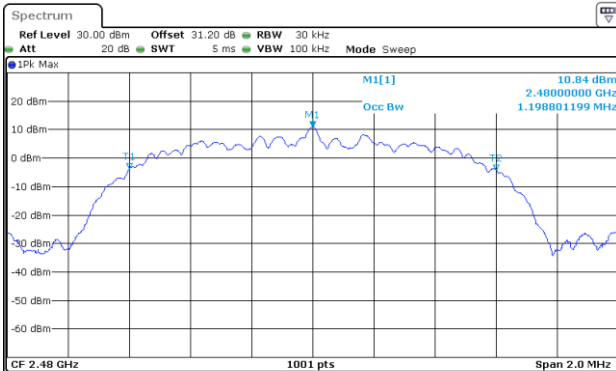

Date: 2 JUN 2023 20:18:40


Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.




Band Edges

<2Mbps>

Low Band Edge Plot on Channel 00

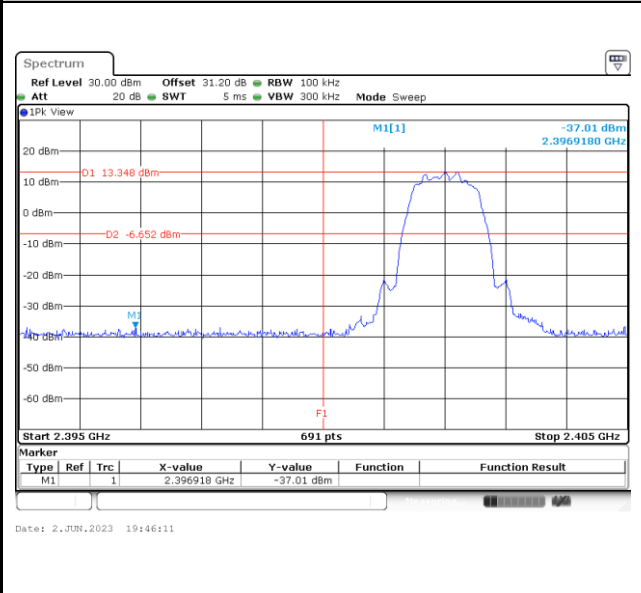

High Band Edge Plot on Channel 78

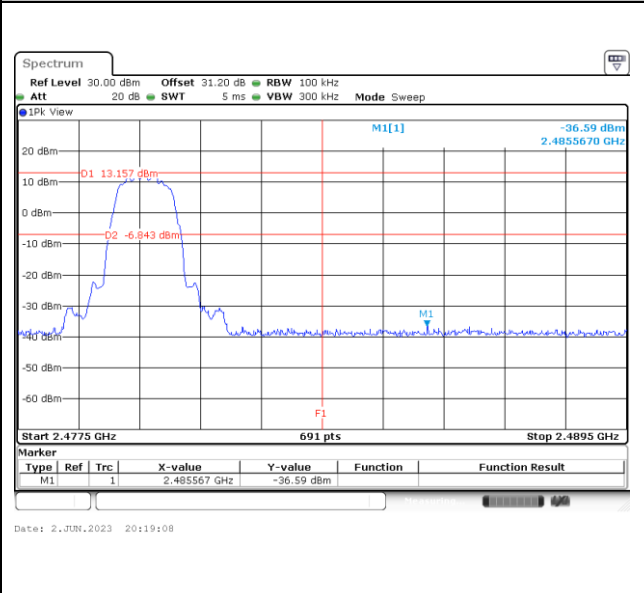





Hopping Mode Band Edges

<2Mbps>

Hopping Mode Low Band Edge Plot

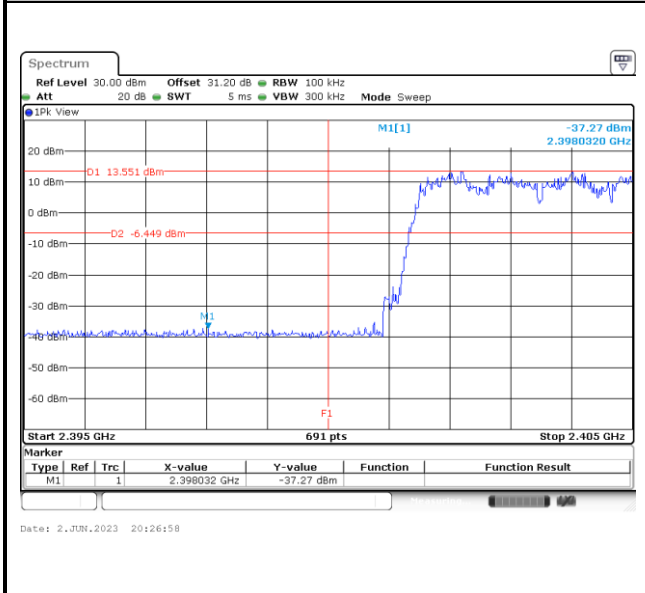

Hopping Mode High Band Edge Plot

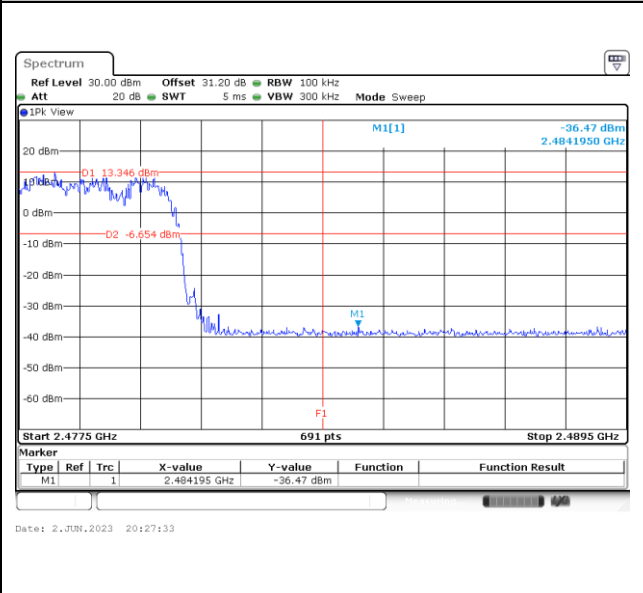





Spurious Emission

<2Mbps>


CSE Plot on Ch 00 between 30MHz ~ 1 GHz

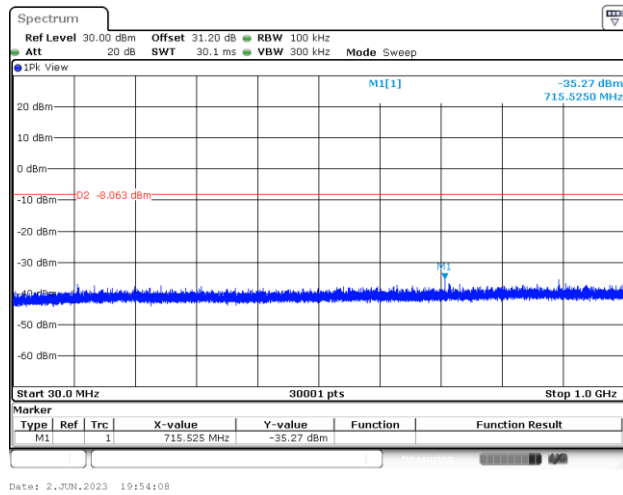


CSE Plot on Ch 00 between 1 GHz ~ 26.5 GHz

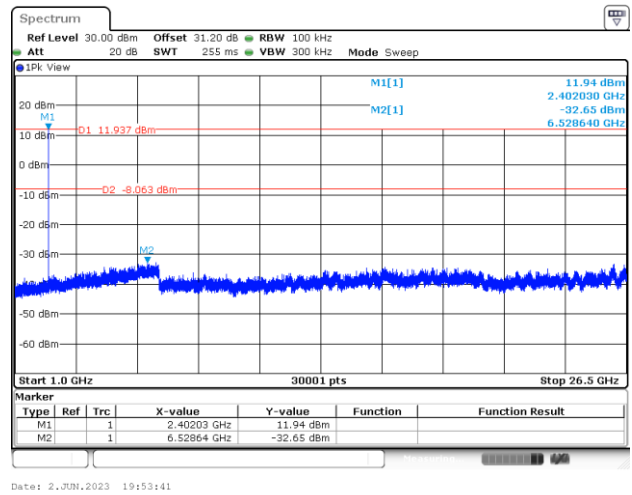

CSE Plot on Ch 39 between 30MHz ~ 1 GHz

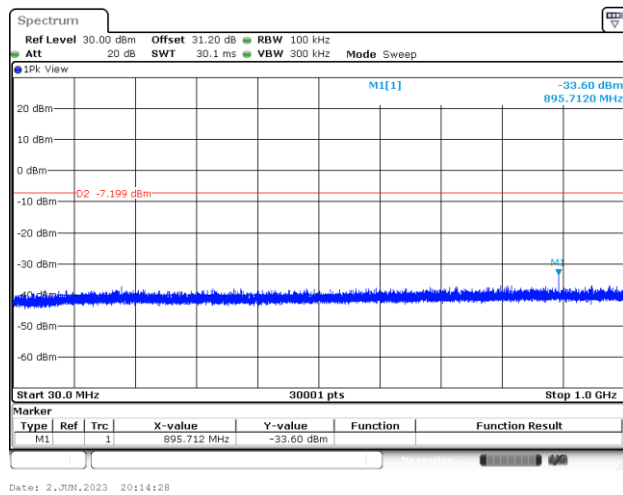


CSE Plot on Ch 39 between 1 GHz ~ 26.5 GHz

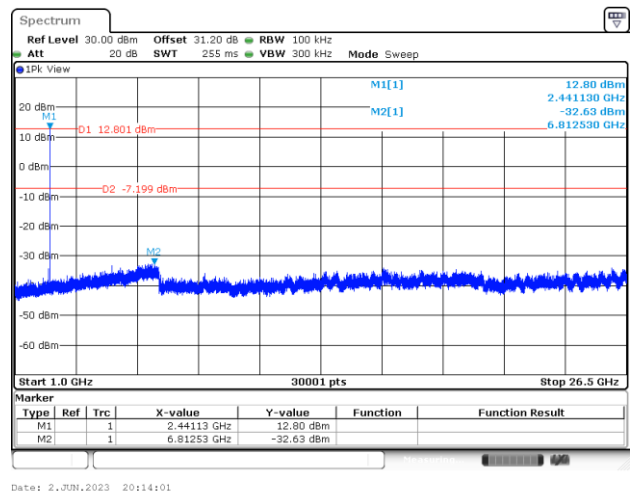




CSE Plot on Ch 78 between 30MHz ~ 1 GHz

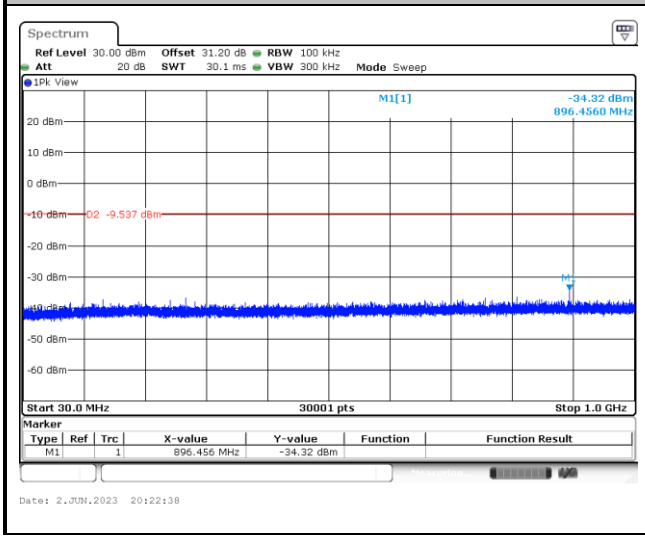

CSE Plot on Ch 78 between 1 GHz ~ 26.5 GHz

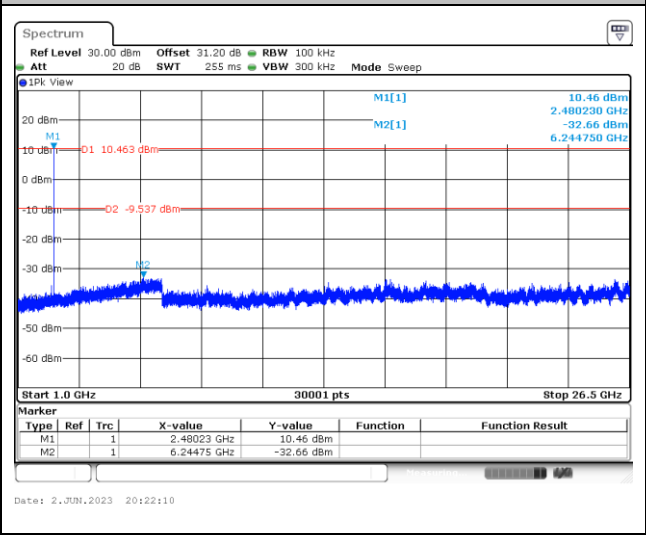




Appendix B. AC Conducted Emission Test Results

Test Engineer :	Calvin Wang	Temperature :	23~26°C
		Relative Humidity :	45~55%

EUT Information

Report NO : 2D0206-01
 Test Mode : Mode 1
 Test Voltage : 120Vac/60Hz
 Phase : Line

Full Spectrum

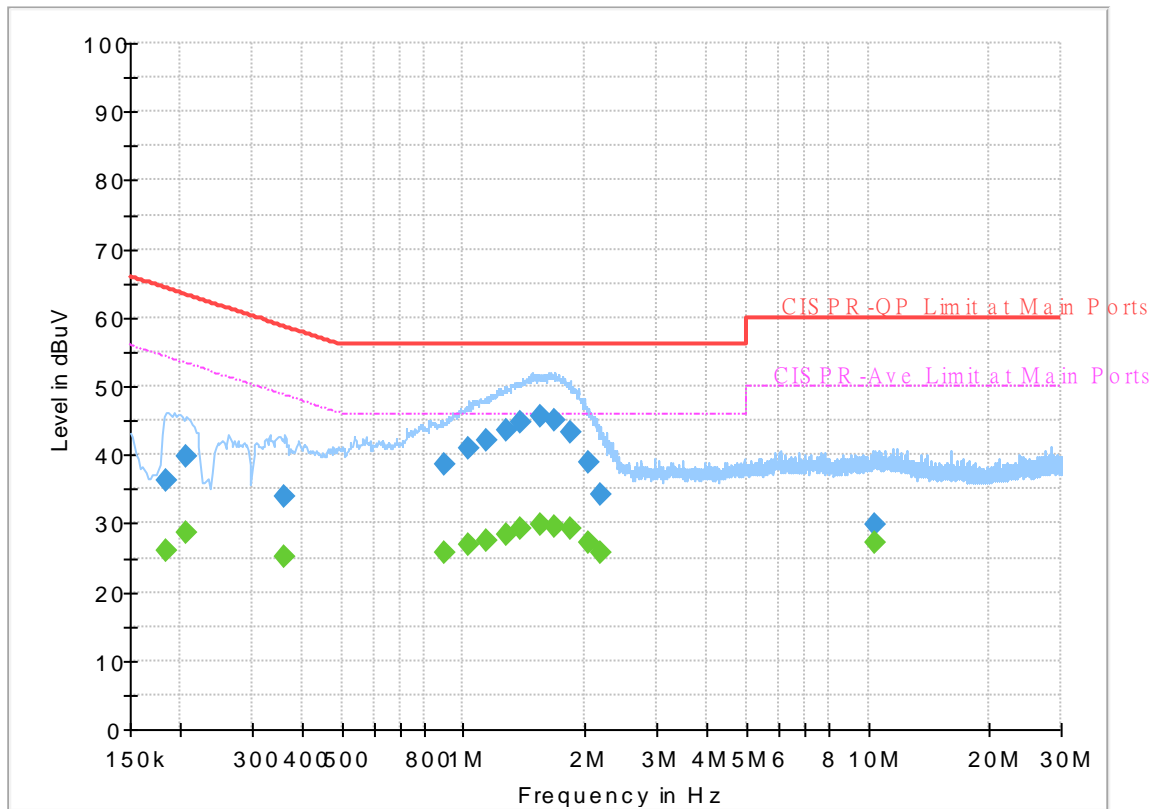

Final_Result


Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.183750	---	25.98	54.31	28.33	L1	OFF	19.9
0.183750	36.40	---	64.31	27.91	L1	OFF	19.9
0.206250	---	28.66	53.36	24.70	L1	OFF	19.9
0.206250	39.71	---	63.36	23.65	L1	OFF	19.9
0.361500	---	25.26	48.69	23.43	L1	OFF	19.9
0.361500	33.92	---	58.69	24.77	L1	OFF	19.9
0.897000	---	25.81	46.00	20.19	L1	OFF	19.9
0.897000	38.51	---	56.00	17.49	L1	OFF	19.9
1.034250	---	27.01	46.00	18.99	L1	OFF	19.9
1.034250	40.91	---	56.00	15.09	L1	OFF	19.9
1.144500	---	27.59	46.00	18.41	L1	OFF	19.9
1.144500	42.04	---	56.00	13.96	L1	OFF	19.9
1.279500	---	28.44	46.00	17.56	L1	OFF	19.9
1.279500	43.68	---	56.00	12.32	L1	OFF	19.9
1.378500	---	29.29	46.00	16.71	L1	OFF	19.9
1.378500	44.60	---	56.00	11.40	L1	OFF	19.9
1.554000	---	29.94	46.00	16.06	L1	OFF	19.9
1.554000	45.48	---	56.00	10.52	L1	OFF	19.9
1.689000	---	29.56	46.00	16.44	L1	OFF	19.9
1.689000	44.92	---	56.00	11.08	L1	OFF	19.9
1.830750	---	29.16	46.00	16.84	L1	OFF	19.9

1.830750	43.42	---	56.00	12.58	L1	OFF	19.9
2.037750	---	27.32	46.00	18.68	L1	OFF	19.9
2.037750	38.76	---	56.00	17.24	L1	OFF	19.9
2.179500	---	25.85	46.00	20.15	L1	OFF	19.9
2.179500	34.10	---	56.00	21.90	L1	OFF	19.9
10.340250	---	27.18	50.00	22.82	L1	OFF	20.3
10.340250	29.89	---	60.00	30.11	L1	OFF	20.3

EUT Information

Report NO : 2D0206-01
 Test Mode : Mode 1
 Test Voltage : 120Vac/60Hz
 Phase : Neutral

Full Spectrum

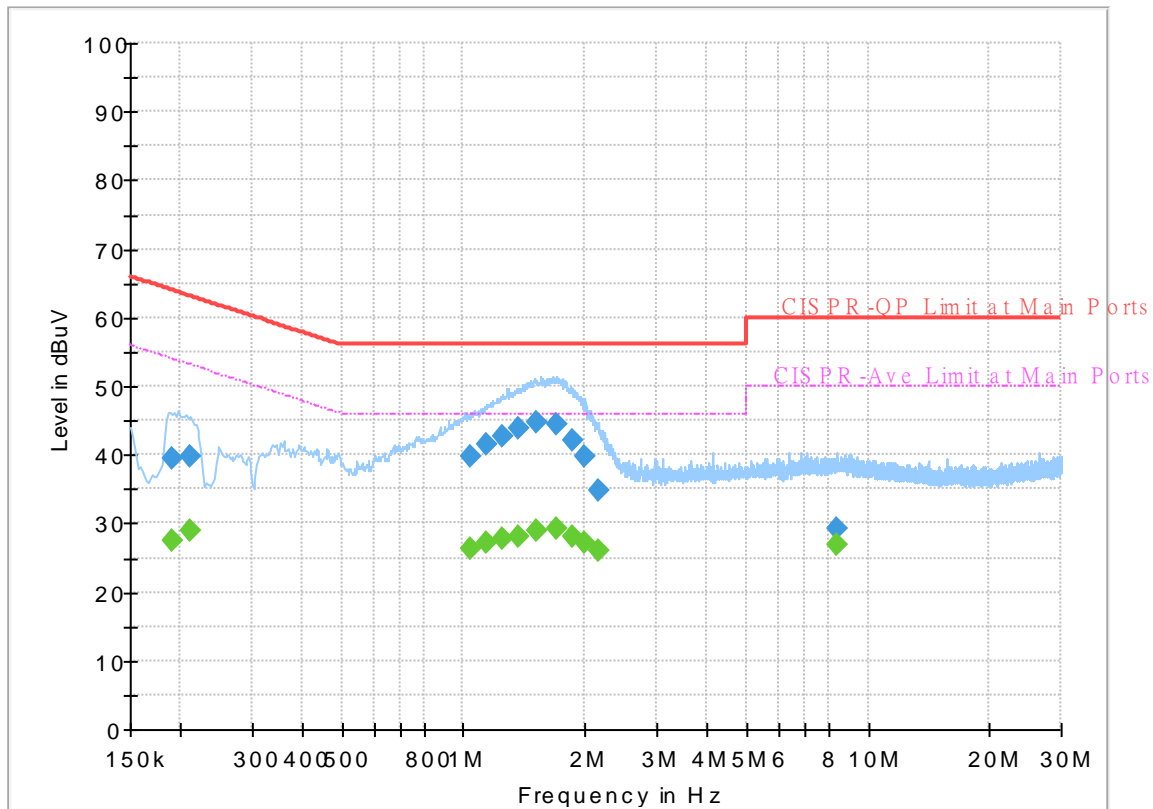

Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.190500	---	27.38	54.02	26.64	N	OFF	19.9
0.190500	39.57	---	64.02	24.45	N	OFF	19.9
0.210750	---	28.98	53.18	24.20	N	OFF	19.9
0.210750	39.79	---	63.18	23.39	N	OFF	19.9
1.038750	---	26.24	46.00	19.76	N	OFF	19.9
1.038750	39.90	---	56.00	16.10	N	OFF	19.9
1.135500	---	27.08	46.00	18.92	N	OFF	19.9
1.135500	41.38	---	56.00	14.62	N	OFF	19.9
1.248000	---	27.84	46.00	18.16	N	OFF	19.9
1.248000	42.82	---	56.00	13.18	N	OFF	19.9
1.369500	---	28.20	46.00	17.80	N	OFF	19.9
1.369500	43.75	---	56.00	12.25	N	OFF	19.9
1.513500	---	28.92	46.00	17.08	N	OFF	19.9
1.513500	44.60	---	56.00	11.40	N	OFF	19.9
1.704750	---	29.20	46.00	16.80	N	OFF	19.9
1.704750	44.34	---	56.00	11.66	N	OFF	19.9
1.860000	---	28.08	46.00	17.92	N	OFF	19.9
1.860000	41.98	---	56.00	14.02	N	OFF	19.9
1.997250	---	27.26	46.00	18.74	N	OFF	19.9
1.997250	39.67	---	56.00	16.33	N	OFF	19.9
2.150250	---	25.91	46.00	20.09	N	OFF	19.9

2.150250	34.71	---	56.00	21.29	N	OFF	19.9
8.333250	---	26.84	50.00	23.16	N	OFF	20.2
8.333250	29.12	---	60.00	30.88	N	OFF	20.2



Appendix C. Radiated Spurious Emission

Test Engineer :	Michael Liu, Bank Lin and Lu Wen-Kai	Temperature :	20.1 ~ 23.1°C
		Relative Humidity :	55 ~ 65 %

<BR+EDR Ant. 3>

2.4GHz 2400~2483.5MHz

BT (Band Edge @ 3m)

BT	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)	
BT CH00 2402MHz		2387.28	50.01	-23.99	74	46.43	26.9	9.14	32.46	185	146	P	H	
		2387.28	25.22	-28.78	54	-	-	-	-	-	-	A	H	
	*	2402	114.14	-	-	110.55	26.9	9.16	32.47	185	146	P	H	
	*	2402	89.35	-	-	-	-	-	-	-	-	A	H	
													H	
			2356.095	49.33	-24.67	74	45.79	26.9	9.08	32.44	104	93	P	V
			2356.095	24.54	-29.46	54	-	-	-	-	-	-	A	V
	*		2402	114.25	-	-	110.66	26.9	9.16	32.47	104	93	P	V
	*		2402	89.46	-	-	-	-	-	-	-	-	A	V
														V
BT CH 39 2441MHz		2380.98	49.53	-24.47	74	45.97	26.9	9.12	32.46	146	131	P	H	
		2380.98	24.74	-29.26	54	-	-	-	-	-	-	A	H	
	*	2441	114.57	-	-	110.85	26.98	9.24	32.5	146	131	P	H	
	*	2441	89.78	-	-	-	-	-	-	-	-	A	H	
			2488.45	49.67	-24.33	74	45.95	26.92	9.33	32.53	146	131	P	H
			2488.45	24.88	-29.12	54	-	-	-	-	-	-	A	H
			2368.94	49.18	-24.82	74	45.63	26.9	9.1	32.45	100	91	P	V
			2368.94	24.39	-29.61	54	-	-	-	-	-	-	A	V
	*		2441	115.32	-	-	111.6	26.98	9.24	32.5	100	91	P	V
	*		2441	90.53	-	-	-	-	-	-	-	-	A	V
			2491.67	48.96	-25.04	74	45.23	26.92	9.34	32.53	100	91	P	V
			2491.67	24.17	-29.83	54	-	-	-	-	-	-	A	V



BT	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
BT CH 78 2480MHz	*	2480	113.38	-	-	109.65	26.94	9.32	32.53	147	137	P	H	
	*	2480	88.59	-	-	-	-	-	-	-	-	A	H	
		2483.52	50.93	-23.07	74	47.21	26.93	9.32	32.53	147	137	P	H	
		2483.52	26.14	-27.86	54	-	-	-	-	-	-	A	H	
													H	
													H	
	*	2480	113.99	-	-	110.26	26.94	9.32	32.53	100	78	P	V	
	*	2480	89.2	-	-	-	-	-	-	-	-	-	A	V
		2484	50.45	-23.55	74	46.73	26.93	9.32	32.53	100	78	P	V	
		2484	25.66	-28.34	54	-	-	-	-	-	-	A	V	
													V	
													V	
	Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz
BT (Harmonic @ 3m)

BT	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
BT CH 00 2402MHz		4804	49.69	-24.31	74	36.35	32.42	14.51	33.59	297	116	P	H	
		4804	24.9	-29.1	54	-	-	-	-	-	-	A	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
			4804	51.3	-22.7	74	37.96	32.42	14.51	33.59	320	146	P	V
			4804	26.51	-27.49	54	-	-	-	-	-	-	A	V
														V
														V
														V
														V
														V
														V
													V	
													V	



Emission above 18GHz

2.4GHz BT (SHF)

BT	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz BT SHF		24984.72	45.24	-28.76	74	42.09	39.78	22.9	59.53	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
			24992.73	45.86	-28.14	74	42.66	39.79	22.92	59.51	-	-	P
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against limit line. 3. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.												



Emission below 1GHz

2.4GHz BT (LF)

BT	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)	
2.4GHz BT LF		58.13	28.1	-11.9	40	47.28	11.8	1.76	32.74	-	-	P	H	
		123.12	30.13	-13.37	43.5	42.92	17.49	2.41	32.69	-	-	P	H	
		314.21	22.47	-23.53	46	32.35	19.28	3.62	32.78	-	-	P	H	
		552.83	28.94	-17.06	46	31.56	25.55	4.76	32.93	-	-	P	H	
		865.17	33.7	-12.3	46	30.64	29.39	5.89	32.22	-	-	P	H	
		953.44	35.95	-10.05	46	30.19	31.14	6.11	31.49	-	-	P	H	
														H
														H
														H
														H
														H
														H
														H
			59.1	32.03	-7.97	40	51.19	11.81	1.77	32.74	-	-	P	V
			120.21	27.86	-15.64	43.5	40.7	17.46	2.39	32.69	-	-	P	V
			561.56	28.92	-17.08	46	30.87	26.2	4.79	32.94	-	-	P	V
			734.22	32.53	-13.47	46	32.15	27.78	5.37	32.77	-	-	P	V
			793.39	32.48	-13.52	46	31.46	28.03	5.63	32.64	-	-	P	V
			943.74	35.98	-10.02	46	30.86	30.62	6.08	31.58	-	-	P	V
														V
													V	
													V	
													V	
													V	
													V	
Remark	1. No other spurious found. 2. All results are PASS against limit line. 3. The emission position marked as "-" means no suspected emission found and emission level has at least 6dB margin against limit or emission is noise floor only.													



<HR 2Mbps Ant. 3>

2.4GHz 2400~2483.5MHz

BT (Band Edge @ 3m)

BT	Note	Frequency	Level	Margin	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)	
BT CH00 2402MHz		2378.775	49.64	-24.36	74	46.08	26.9	9.12	32.46	100	144	P	H	
		2378.775	24.97	-29.03	54	-	-	-	-	-	-	A	H	
	*	2402	115.56	-	-	111.97	26.9	9.16	32.47	100	144	P	H	
	*	2402	90.89	-	-	-	-	-	-	-	-	A	H	
													H	
													H	
			2349.165	49.17	-24.83	74	45.65	26.9	9.06	32.44	400	109	P	V
			2349.165	24.5	-29.5	54	-	-	-	-	-	-	A	V
	*		2402	110.58	-	-	106.99	26.9	9.16	32.47	400	109	P	V
	*		2402	85.91	-	-	-	-	-	-	-	-	A	V
													V	
													V	
BT CH 39 2441MHz		2379.72	49.45	-24.55	74	45.89	26.9	9.12	32.46	103	133	P	H	
		2379.72	24.78	-29.22	54	-	-	-	-	-	-	A	H	
	*	2441	115.52	-	-	111.8	26.98	9.24	32.5	103	133	P	H	
	*	2441	90.85	-	-	-	-	-	-	-	-	A	H	
			2499.58	49.57	-24.43	74	45.86	26.9	9.35	32.54	103	133	P	H
			2499.58	24.9	-29.1	54	-	-	-	-	-	-	A	H
			2364.04	49.47	-24.53	74	45.93	26.9	9.09	32.45	399	61	P	V
			2364.04	24.8	-29.2	54	-	-	-	-	-	-	A	V
	*		2441	112.03	-	-	108.31	26.98	9.24	32.5	399	61	P	V
	*		2441	87.36	-	-	-	-	-	-	-	-	A	V
		2486.84	49.63	-24.37	74	45.9	26.93	9.33	32.53	399	61	P	V	
		2486.84	24.96	-29.04	54	-	-	-	-	-	-	A	V	



BT	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
BT CH 78 2480MHz	*	2480	115.37	-	-	111.64	26.94	9.32	32.53	100	128	P	H	
	*	2480	90.7	-	-	-	-	-	-	-	-	A	H	
		2483.76	52.6	-21.4	74	48.88	26.93	9.32	32.53	100	128	P	H	
		2483.76	27.93	-26.07	54	-	-	-	-	-	-	A	H	
													H	
													H	
	*	2480	110.6	-	-	106.87	26.94	9.32	32.53	367	57	P	V	
	*	2480	85.93	-	-	-	-	-	-	-	-	-	A	V
		2484.72	51	-23	74	47.27	26.93	9.33	32.53	367	57	P	V	
		2484.72	26.33	-27.67	54	-	-	-	-	-	-	A	V	
													V	
													V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.													



<BR+EDR Ant. 4>

2.4GHz 2400~2483.5MHz

BT (Band Edge @ 3m)

BT	Note	Frequency	Level	Margin	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)	
BT CH00 2402MHz		2385.285	49.31	-24.69	74	45.74	26.9	9.13	32.46	100	175	P	H	
		2385.285	24.52	-29.48	54	-	-	-	-	-	-	A	H	
	*	2402	108.77	-	-	105.18	26.9	9.16	32.47	100	175	P	H	
	*	2402	83.98	-	-	-	-	-	-	-	-	A	H	
													H	
													H	
			2325.435	49.62	-24.38	74	46.12	26.9	9.02	32.42	111	73	P	V
			2325.435	24.83	-29.17	54	-	-	-	-	-	-	A	V
	*		2402	113.6	-	-	110.01	26.9	9.16	32.47	111	73	P	V
	*		2402	88.81	-	-	-	-	-	-	-	-	A	V
													V	
													V	
BT CH 39 2441MHz		2384.76	49.91	-24.09	74	46.34	26.9	9.13	32.46	148	134	P	H	
		2384.76	25.12	-28.88	54	-	-	-	-	-	-	A	H	
	*	2441	115.01	-	-	111.29	26.98	9.24	32.5	148	134	P	H	
	*	2441	90.22	-	-	-	-	-	-	-	-	A	H	
			2484.39	50	-24	74	46.28	26.93	9.32	32.53	148	134	P	H
			2484.39	25.21	-28.79	54	-	-	-	-	-	-	A	H
			2375.8	49.8	-24.2	74	46.25	26.9	9.11	32.46	100	91	P	V
			2375.8	25.01	-28.99	54	-	-	-	-	-	-	A	V
	*		2441	115.55	-	-	111.83	26.98	9.24	32.5	100	91	P	V
	*		2441	90.76	-	-	-	-	-	-	-	-	A	V
			2489.57	49.63	-24.37	74	45.91	26.92	9.33	32.53	100	91	P	V
			2489.57	24.84	-29.16	54	-	-	-	-	-	-	A	V



BT	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
BT CH 78 2480MHz	*	2480	113.76	-	-	110.03	26.94	9.32	32.53	156	135	P	H	
	*	2480	88.97	-	-	-	-	-	-	-	-	A	H	
		2484.28	50.26	-23.74	74	46.54	26.93	9.32	32.53	156	135	P	H	
		2484.28	25.47	-28.53	54	-	-	-	-	-	-	A	H	
													H	
													H	
	*	2480	113.77	-	-	110.04	26.94	9.32	32.53	100	84	P	V	
	*	2480	88.98	-	-	-	-	-	-	-	-	-	A	V
		2494.92	50.77	-23.23	74	47.05	26.91	9.35	32.54	100	84	P	V	
		2494.92	25.98	-28.02	54	-	-	-	-	-	-	A	V	
													V	
													V	
	Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz
BT (Harmonic @ 3m)

BT	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
BT CH 00 2402MHz		4804	46.86	-27.14	74	33.52	32.42	14.51	33.59	-	-	P	H	
		4804	22.07	-31.93	54	-	-	-	-	-	-	A	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
			4804	46.34	-27.66	74	33	32.42	14.51	33.59	-	-	P	V
			4804	21.55	-32.45	54	-	-	-	-	-	-	A	V
														V
														V
														V
														V
														V
														V
													V	
													V	



< HR 2Mbps Ant. 4 >

2.4GHz 2400~2483.5MHz

BT (Band Edge @ 3m)

BT	Note	Frequency	Level	Margin	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)	
BT CH00 2402MHz		2357.355	49.18	-24.82	74	45.64	26.9	9.08	32.44	100	122	P	H	
		2357.355	24.51	-29.49	54	-	-	-	-	-	-	A	H	
	*	2402	115.09	-	-	111.5	26.9	9.16	32.47	100	122	P	H	
	*	2402	90.42	-	-	-	-	-	-	-	-	A	H	
													H	
														H
			2389.59	49.06	-24.94	74	45.48	26.9	9.14	32.46	400	108	P	V
			2389.59	24.39	-29.61	54	-	-	-	-	-	-	A	V
	*		2402	110.49	-	-	106.9	26.9	9.16	32.47	400	108	P	V
	*		2402	85.82	-	-	-	-	-	-	-	-	A	V
													V	
													V	
BT CH 39 2441MHz		2357.6	49.42	-24.58	74	45.88	26.9	9.08	32.44	100	142	P	H	
		2357.6	24.75	-29.25	54	-	-	-	-	-	-	A	H	
	*	2441	115.87	-	-	112.15	26.98	9.24	32.5	100	142	P	H	
	*	2441	91.2	-	-	-	-	-	-	-	-	A	H	
			2497.83	49.25	-24.75	74	45.54	26.9	9.35	32.54	100	142	P	H
			2497.83	24.58	-29.42	54	-	-	-	-	-	-	A	H
			2364.04	49.49	-24.51	74	45.95	26.9	9.09	32.45	400	71	P	V
			2364.04	24.82	-29.18	54	-	-	-	-	-	-	A	V
	*		2441	113.31	-	-	109.59	26.98	9.24	32.5	400	71	P	V
	*		2441	88.64	-	-	-	-	-	-	-	-	A	V
			2497.2	50.1	-23.9	74	46.38	26.91	9.35	32.54	400	71	P	V
			2497.2	25.43	-28.57	54	-	-	-	-	-	-	A	V



BT	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
BT CH 78 2480MHz	*	2480	115.09	-	-	111.36	26.94	9.32	32.53	100	127	P	H	
	*	2480	90.42	-	-	-	-	-	-	-	-	A	H	
		2483.52	51.87	-22.13	74	48.15	26.93	9.32	32.53	100	127	P	H	
		2483.52	27.2	-26.8	54	-	-	-	-	-	-	A	H	
													H	
													H	
	*	2480	111.47	-	-	107.74	26.94	9.32	32.53	373	127	P	V	
	*	2480	86.8	-	-	-	-	-	-	-	-	-	A	V
		2483.56	51.32	-22.68	74	47.6	26.93	9.32	32.53	373	127	P	V	
		2483.56	26.65	-27.35	54	-	-	-	-	-	-	A	V	
													V	
													V	
	Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz
BT (Harmonic @ 3m)

BT	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
BT CH 00 2402MHz		4804	46.6	-27.4	74	33.26	32.42	14.51	33.59	-	-	P	H	
		4804	21.93	-32.07	54	-	-	-	-	-	-	A	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
			4804	46.94	-27.06	74	33.6	32.42	14.51	33.59	-	-	P	V
			4804	22.27	-31.73	54	-	-	-	-	-	-	A	V
														V
														V
														V
														V
														V
													V	
													V	
													V	



Emission after 18GHz

2.4GHz BT (SHF)

BT	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz BT SHF		24712.38	45.51	-28.49	74	43.74	39.37	22.42	60.02	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
			24928.65	45.31	-28.69	74	42.45	39.69	22.8	59.63	-	-	P
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against limit line. 3. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.												



<TXBF 1Mbps BR+EDR Ant. 3+4 >

2.4GHz 2400~2483.5MHz

BT (Band Edge @ 3m)

BT	Note	Frequency	Level	Margin	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)	
BT CH00 2402MHz		2333.835	50.08	-23.92	74	46.58	26.9	9.03	32.43	133	121	P	H	
		2333.835	25.29	-28.71	54	-	-	-	-	-	-	A	H	
	*	2402	115.11	-	-	111.52	26.9	9.16	32.47	133	121	P	H	
	*	2402	90.32	-	-	-	-	-	-	-	-	A	H	
													H	
													H	
			2346.33	50.48	-23.52	74	46.96	26.9	9.06	32.44	100	81	P	V
			2346.33	25.69	-28.31	54	-	-	-	-	-	-	A	V
	*		2402	103.11	-	-	99.52	26.9	9.16	32.47	100	81	P	V
	*		2402	78.32	-	-	-	-	-	-	-	-	A	V
													V	
													V	
BT CH 39 2441MHz		2352.28	51.37	-22.63	74	47.84	26.9	9.07	32.44	144	133	P	H	
		2352.28	26.58	-27.42	54	-	-	-	-	-	-	A	H	
	*	2441	116.77	-	-	113.05	26.98	9.24	32.5	144	133	P	H	
	*	2441	91.98	-	-	-	-	-	-	-	-	A	H	
			2488.38	50.93	-23.07	74	47.21	26.92	9.33	32.53	144	133	P	H
			2488.38	26.14	-27.86	54	-	-	-	-	-	-	A	H
			2319.94	50.35	-23.65	74	46.86	26.9	9.01	32.42	100	79	P	V
			2319.94	25.56	-28.44	54	-	-	-	-	-	-	A	V
	*		2441	100.55	-	-	96.83	26.98	9.24	32.5	100	79	P	V
	*		2441	75.76	-	-	-	-	-	-	-	-	A	V
			2485.72	50.74	-23.26	74	47.01	26.93	9.33	32.53	100	79	P	V
			2485.72	25.95	-28.05	54	-	-	-	-	-	-	A	V



BT	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
BT CH 78 2480MHz	*	2480	115.77	-	-	112.04	26.94	9.32	32.53	160	321	P	H	
	*	2480	90.98	-	-	-	-	-	-	-	-	A	H	
		2483.6	53.39	-20.61	74	49.67	26.93	9.32	32.53	160	321	P	H	
		2483.6	28.6	-25.4	54	-	-	-	-	-	-	A	H	
													H	
													H	
	*	2480	104.41	-	-	100.68	26.94	9.32	32.53	100	67	P	V	
	*	2480	79.62	-	-	-	-	-	-	-	-	-	A	V
		2491.28	50.64	-23.36	74	46.91	26.92	9.34	32.53	100	67	P	V	
		2491.28	25.85	-28.15	54	-	-	-	-	-	-	A	V	
													V	
													V	
Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against Peak and Average limit line. 													



2.4GHz 2400~2483.5MHz
BT (Harmonic @ 3m)

BT	Note	Frequency (MHz)	Level (dBµV/m)	Margin (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BT CH 00 2402MHz		4804	46.59	-27.41	74	33.25	32.42	14.51	33.59	-	-	P	H
		4804	21.8	-32.2	54	-	-	-	-	-	-	A	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
			4804	46.75	-27.25	74	33.41	32.42	14.51	33.59	-	-	P
		4804	21.96	-32.04	54	-	-	-	-	-	-	A	V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V



<TXBF HR 2Mbps Ant. 3+4 >

2.4GHz 2400~2483.5MHz

BT (Band Edge @ 3m)

BT	Note	Frequency	Level	Margin	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)	
BT CH00 2402MHz		2388.015	50.12	-23.88	74	46.54	26.9	9.14	32.46	117	193	P	H	
		2388.015	25.36	-28.64	54	-	-	-	-	-	-	A	H	
	*	2402	113.35	-	-	109.76	26.9	9.16	32.47	117	193	P	H	
	*	2402	88.59	-	-	-	-	-	-	-	-	A	H	
													H	
													H	
			2357.775	49.82	-24.18	74	46.28	26.9	9.08	32.44	119	88	P	V
			2357.775	25.06	-28.94	54	-	-	-	-	-	-	A	V
	*		2402	116.03	-	-	112.44	26.9	9.16	32.47	119	88	P	V
	*		2402	91.27	-	-	-	-	-	-	-	-	A	V
													V	
													V	
BT CH 39 2441MHz		2375.94	49.98	-24.02	74	46.43	26.9	9.11	32.46	100	193	P	H	
		2375.94	25.22	-28.78	54	-	-	-	-	-	-	A	H	
	*	2441	113.04	-	-	109.32	26.98	9.24	32.5	100	193	P	H	
	*	2441	88.28	-	-	-	-	-	-	-	-	A	H	
			2494.96	50.05	-23.95	74	46.33	26.91	9.35	32.54	100	193	P	H
			2494.96	25.29	-28.71	54	-	-	-	-	-	-	A	H
			2318.54	49.89	-24.11	74	46.4	26.9	9.01	32.42	100	89	P	V
			2318.54	25.13	-28.87	54	-	-	-	-	-	-	A	V
	*		2441	117.11	-	-	113.39	26.98	9.24	32.5	100	89	P	V
	*		2441	92.35	-	-	-	-	-	-	-	-	A	V
		2489.15	50.21	-23.79	74	46.49	26.92	9.33	32.53	100	89	P	V	
		2489.15	25.45	-28.55	54	-	-	-	-	-	-	A	V	



BT	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
BT CH 78 2480MHz	*	2480	117.45	-	-	113.72	26.94	9.32	32.53	112	139	P	H	
	*	2480	92.69	-	-	-	-	-	-	-	-	A	H	
		2483.52	52.82	-21.18	74	49.1	26.93	9.32	32.53	112	139	P	H	
		2483.52	28.06	-25.94	54	-	-	-	-	-	-	A	H	
													H	
													H	
	*	2480	113.84	-	-	110.11	26.94	9.32	32.53	124	248	P	V	
	*	2480	89.08	-	-	-	-	-	-	-	-	-	A	V
		2483.64	50.94	-23.06	74	47.22	26.93	9.32	32.53	124	248	P	V	
		2483.64	26.18	-27.82	54	-	-	-	-	-	-	A	V	
													V	
													V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.													



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

BT	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
				Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
	(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BT CH 00 2402MHz	2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) =
Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
= 55.45 (dBμV/m)
2. Margin (dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 55.45(dBμV/m) – 74(dBμV/m)
= -18.55(dB)

Peak measured complies with the limit line, so test result is “PASS”.



Appendix D. Radiated Spurious Emission Plots

Test Engineer :	Michael Liu, Bank Lin and Lu Wen-Kai	Temperature :	20.1 ~ 23.1°C
		Relative Humidity :	55 ~ 65 %



<BR+EDR Ant. 3>

2.4GHz 2400~2483.5MHz

BT (Band Edge @ 3m)

BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BT-BR CH00 2402MHz	
	Horizontal	Fundamental
Peak	<p>Site : 03CH22-HY Condition : PEAK_BE_74 3m LE2C04A18EN_220706 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	<p>Site : 03CH22-HY Condition : PEAK_74 3m LE2C04A18EN_220706 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>

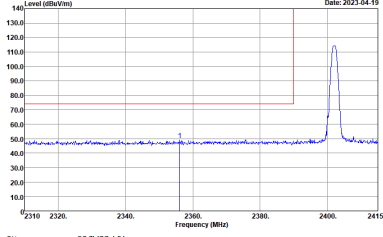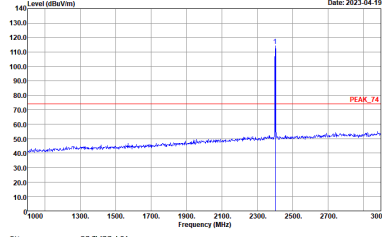

BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BT-BR CH00 2402MHz		
	Vertical	Fundamental
Peak	 <p>Site : 03CH22-14Y Condition : PEAK_95_74 3m LE2004A18EN_220706 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Site : 03CH22-14Y Condition : PEAK_74 3m LE2004A18EN_220706 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>





BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BT-BR CH39 2441MHz		
	Horizontal	Fundamental
Peak	<p>Site : 03CH22-HY Condition : PEAK_BE_74 3m LE2004A18EN_220706 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	<p>Site : 03CH22-HY Condition : PEAK_74 3m LE2004A18EN_220706 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Peak	<p>Site : 03CH22-HY Condition : PEAK_BE_74 3m LE2004A18EN_220706 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	Left blank





BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BT-BR CH39 2441MHz		
	Vertical	Fundamental
Peak	<p>Date: 2023-04-19</p> <p>Site : 03CH22-HY Condition : PEAK_BE_74 3m LE2004A18EN_220706 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	<p>Date: 2023-04-19</p> <p>Site : 03CH22-HY Condition : PEAK_74 3m LE2004A18EN_220706 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Peak	<p>Date: 2023-04-19</p> <p>Site : 03CH22-HY Condition : PEAK_BE_74 3m LE2004A18EN_220706 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	Left blank

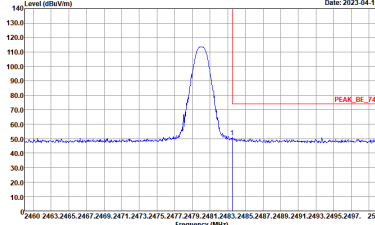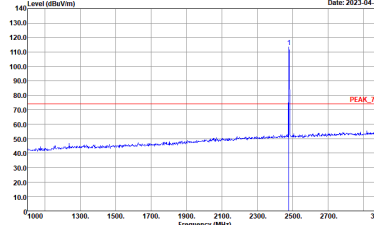

BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BT-BR CH78 2480MHz		
	Horizontal	Fundamental
Peak	 <p>Site : 03CH22-14Y Condition : PEAK_95_74 3m LE2004A18EN_220706 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Site : 03CH22-14Y Condition : PEAK_74 3m LE2004A18EN_220706 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>

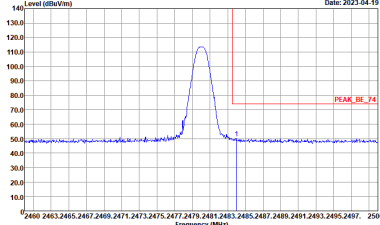
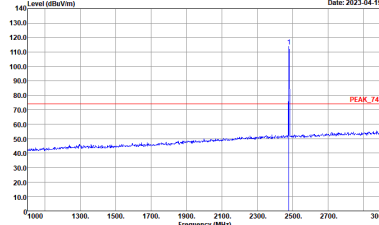


BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BT-BR CH78 2480MHz		
	Vertical	Fundamental
Peak	 <p>Site : 03CH22-14Y Condition : PEAK_95_74 3m LE2004A18EN_220706 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Site : 03CH22-14Y Condition : PEAK_74 3m LE2004A18EN_220706 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>





2.4GHz 2400~2483.5MHz

BT (Harmonic @ 3m)

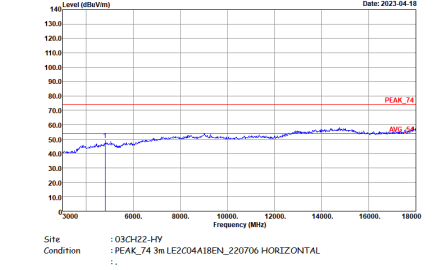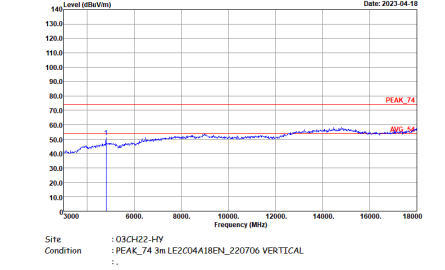BT	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
BT-BR CH00 2402MHz		
Horizontal		Vertical
Peak Avg.	 <p>Site : 03CH22-HY Condition : PEAK_74 3m LEZ004A18EN_220706 HORIZONTAL</p>	 <p>Site : 03CH22-HY Condition : PEAK_74 3m LEZ004A18EN_220706 VERTICAL</p>

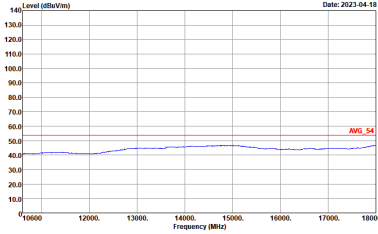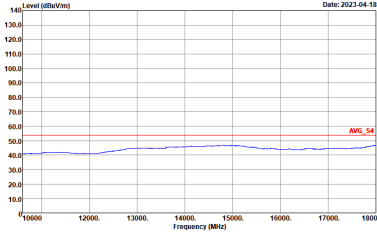

BT	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
BT-BR CH00 2402MHz		
	Horizontal	Vertical
<p>10.6G ~18G Avg.</p>	<p data-bbox="432 434 810 448">Date: 2023-04-18</p>  <p data-bbox="432 667 710 698">Site : 03CH22-14Y Condition : AVG_54 3m LE2004A18EN_220706 HORIZONTAL</p>	<p data-bbox="906 434 1284 448">Date: 2023-04-18</p>  <p data-bbox="906 667 1168 698">Site : 03CH22-14Y Condition : AVG_54 3m LE2004A18EN_220706 VERTICAL</p>