

TEST REPORT

Report Number : 15107843-E5V1

Applicant : Google LLC
1600 Amphitheatre Parkway
Mountain View, CA 9s4043 U.S.A.

Model : G2YBB

FCC ID : A4RG2YBB

EUT Description : PHONE

Test Standard(s) : FCC PART 96.47

Date Of Issue:
2024-04-15

Prepared by:
UL Verification Services Inc.
47173 Benicia Street
Fremont, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888



Revision History

| <u>Rev.</u> | <u>Issue Date</u> | <u>Revisions</u> | <u>Revised By</u> |
|-------------|-------------------|------------------|-------------------|
| V1 | 2024-04-15 | Initial Issue | Steven Tran |

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS 4

2. TEST METHODOLOGY 5

3. FACILITIES AND ACCREDITATION 5

4. DECISION RULES AND MEASUREMENT UNCERTAINTY 6

 4.1. *METROLOGICAL TRACEABILITY* 6

 4.2. *DECISION RULES*..... 6

 4.3. *MEASUREMENT UNCERTAINTY*..... 6

 4.4. *MEASURING INSTRUMENT CALIBRATION* 6

5. EQUIPMENT UNDER TEST 7

 5.1. *DESCRIPTION OF EUT* 7

 5.2. *DESCRIPTION OF TEST SETUP*..... 7

6. TEST AND MEASUREMENT EQUIPMENT 9

7. END USER DEVICE ADDITIONAL REQUIREMENT10

 7.1. *TEST REQUIREMENT* 10

8. TEST PROCEDURE AND EUT CONFIGURATION.....10

 8.1. *END USER DEVICE CONFIGURATION 1*..... 11

 8.2. *END USER DEVICE CONFIGURATION 2*..... 13

9. SETUP PHOTOS.....15

1. ATTESTATION OF TEST RESULTS

| | | |
|--|--|--|
| Applicant Name and Address | Google LLC 1600 Amphitheatre Parkway Mountain View, CA 9s4043 U.S.A. | |
| Model | G2YBB | |
| Brand | GOOGLE | |
| FCC ID | A4RG2YBB | |
| EUT Description | PHONE | |
| Serial Number | 41061FDAQ0009D | |
| Sample Receipt Date | 4/1/2024 | |
| Date Tested | 4/2/2024 | |
| Applicable Standards | FCC Title 47 CFR PART 96.47 | |
| Test Results | COMPLIES | |
| <p>UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.</p> <p>The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. All samples tested were in good operating condition throughout the entire test program. Measurement Uncertainties are published for informational purposes only and were not taken into account unless noted otherwise.</p> <p>This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document.</p> | | |
| Approved & Released By: | Tested By: | |
|  |  | |
| Dan Corona Operations Leader UL Verification Services Inc. | Steven Tran Project Engineer UL Verification Services Inc. | |

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with FCC Part 96.47, KDB 940660 D01 Part 96 CBRS Eqpt v03 and WINNF-TS-0122-v1.0.2.

3. FACILITIES AND ACCREDITATION

UL Verification Services Inc. is accredited by A2LA, certification #0751.05, for all testing performed within the scope of this report. Testing was performed at the locations noted below.

| | Address | ISED CABID | ISED Company Number | FCC Registration |
|-------------------------------------|--|------------|---------------------|------------------|
| <input type="checkbox"/> | Building 1: 47173 Benicia Street, Fremont, CA 94538, USA | US0104 | 2324A | 550739 |
| <input checked="" type="checkbox"/> | Building 2: 47266 Benicia Street, Fremont, CA 94538, USA | | | |
| <input type="checkbox"/> | Building 3: 843 Auburn Court, Fremont, CA 94538 USA | | | |
| <input type="checkbox"/> | Building 4: 47658 Kato Rd, Fremont, CA 94538 USA | | | |
| <input type="checkbox"/> | Building 5: 47670 Kato Rd, Fremont, CA 94538 USA | | | |

4. DECISION RULES AND MEASUREMENT UNCERTAINTY

4.1. METROLOGICAL TRACEABILITY

All test and measuring equipment utilized to perform the tests documented in this report are calibrated on a regular basis, with a maximum time between calibrations of one year or the manufacturers' recommendation, whichever is less, and where applicable is traceable to recognized national standards.

4.2. DECISION RULES

The Decision Rule is based on Simple Acceptance in accordance with ISO Guide 98-4:2012 Clause 8.2. (Measurement uncertainty is not taken into account when stating conformity with a specified requirement.)

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

| PARAMETER | U _{Lab} |
|---|------------------|
| Worst Case Conducted Disturbance, 9KHz to 0.15 MHz | 3.78 dB |
| Worst Case Conducted Disturbance, 0.15 to 30 MHz | 3.40 dB |
| Worst Case Radiated Disturbance, 9KHz to 30 MHz | 2.87 dB |
| Worst Case Radiated Disturbance, 30 to 1000 MHz | 6.01 dB |
| Worst Case Radiated Disturbance, 1000 to 18000 MHz | 4.73 dB |
| Worst Case Radiated Disturbance, 18000 to 26000 MHz | 4.51 dB |
| Worst Case Radiated Disturbance, 26000 to 40000 MHz | 5.29 dB |

Uncertainty figures are valid to a confidence level of 95%.

4.4. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a phone.

5.2. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

| Support Equipment List | | | | |
|--------------------------|--------------|------------|---------------|--------|
| Description | Manufacturer | Model | Serial Number | FCC ID |
| Laptop and AC/DC adapter | Lenovo | 20NYS1GL00 | MJ0C6F8E | - |


I/O CABLES

| I/O Cable List | | | | | | |
|----------------|---------|----------------------|----------------|-------------|------------------|---------|
| Cable No | Port | # of identical ports | Connector Type | Cable Type | Cable Length (m) | Remarks |
| 1 | AC | 1 | AC | Un-Shielded | 1 | N/A |
| 3 | RJ45 | 3 | Ethernet | Un-Shielded | 1 | N/A |
| 2 | RF Port | 2 | SMA | Shielded | 0.5 | N/A |

TEST SETUP

The standalone EUT connected to a certified CBSD and Spectrum Analyzer via air and an RF cable respectively.

SETUP DIAGRAM OF TEST SYSTEM

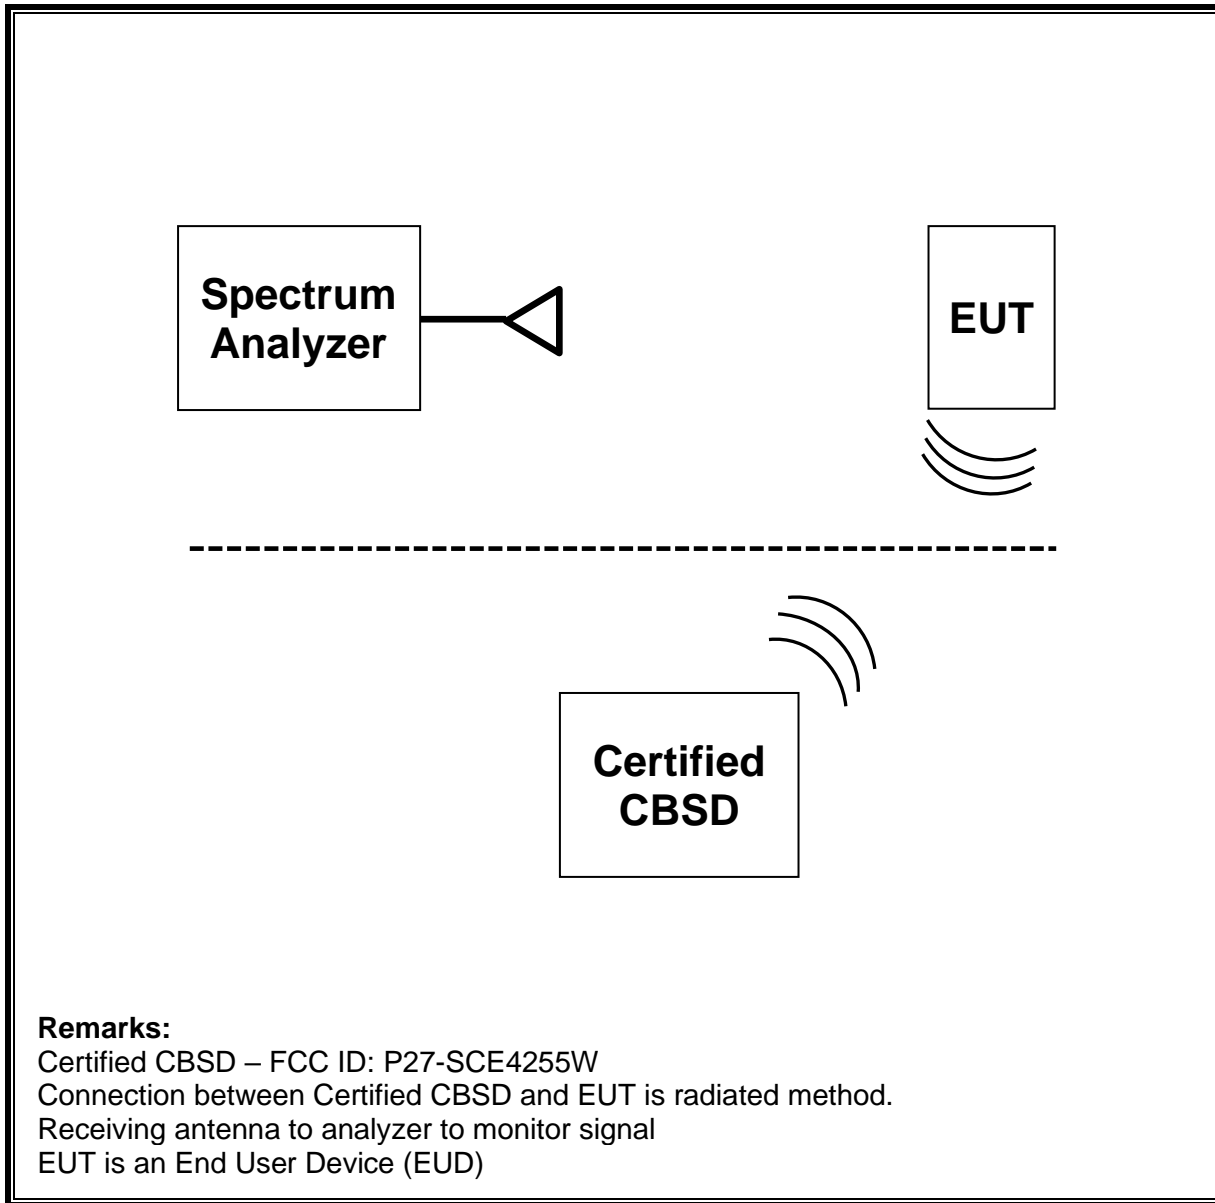

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

| Test Equipment List | | | | |
|--------------------------------------|---------------------------------|----------|---------------|------------|
| Description | Manufacturer | Model | ID Num | Cal Due |
| Spectrum Analyzer, PXA, 3Hz to 44GHz | Agilent (Keysight) Technologies | N9030A | 80396 | 02/28/2025 |
| Mount Antenna | Wilson Amplifiers | 301126 | - | - |
| Mosolabs Englewood B48 LTE AP | Mosolabs | SCE4255W | 2206CW6000010 | - |

7. END USER DEVICE ADDITIONAL REQUIREMENT

7.1. TEST REQUIREMENT

FCC Part 96.47

- (a) End User Devices may operate only if they can positively receive and decode an authorization signal transmitted by a CBSD, including the frequencies and power limits for their operation.
- (1) An End User Device must discontinue operations, change frequencies, or change its operational power level within 10 seconds of receiving instructions from its associated CBSD.

8. TEST PROCEDURE AND EUT CONFIGURATION

KDB 940660 D01 Part 96 CBRS v03, WINNF-TS-0122 V1.0.2

Additional requirements are required to End-User Device n48 device base on CBSD protocol. During the test, the EUT and its companion certified CBSD (FCC ID: P27-SCE4255W) device communicate with each other via air. Plots are captured and measurements are done over the air, in which the path loss is not accounted for the correction of the output power.

| Configuration | Frequency (MHz) | Power (dBm/MHz) | Bandwidth (MHz) |
|---------------|-----------------|-----------------|-----------------|
| 1 | 3670 | 15 | 20 |
| 2 | 3690 | 10 | 20 |

Configuration 1

- a) Setup CBSD with 3670MHz and power level 15 dBm/MHz
- b) Enable B48 service from CBSD admin control panel
- c) Check EUT Transmitter Frequency and power
- d) Disable B48 service from CBSD admin control panel and check EUT stop transmission within 10s.


Configuration 2

- a) Enable B48 service on radio admin control panel, so that the frequency 3690MHz and power level 10 dBm/MHz come up automatically.
- b) Check EUT Transmitter Frequency and power
- c) Disable B48 service from CBSD admin control panel and check EUT stop transmission within 10s.

s

TEST RESULTS

8.1. END USER DEVICE CONFIGURATION 1 (3670MHz; MaxEIRP: 15 dBm/MHz)

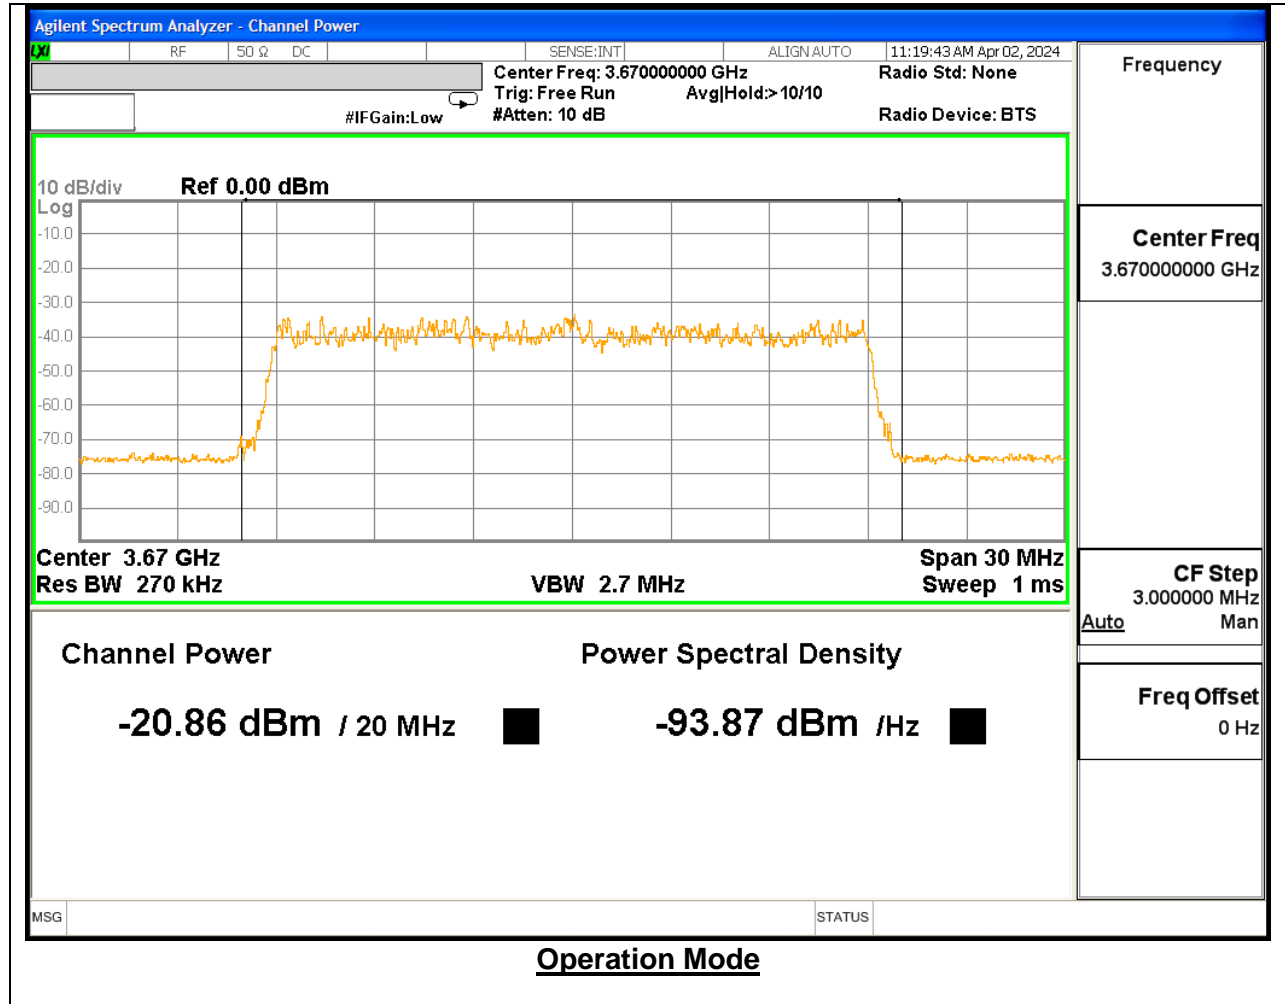



Stop Operation Within 10 second Mode


NOTE:


Marker 1: Authorized CBSD sends a signal to stop B48 transmission.

Marker 2: Time elapsed since signal to stop B48 transmission. EUD has stopped transmission.

Marker 3-4 Delta: 10 seconds has elapsed since CBSD has sent a signal to stop B48 transmission to EUT.

8.2. END USER DEVICE CONFIGURATION 2 (3690MHz; MaxEIRP: 10 dBm/MHz)

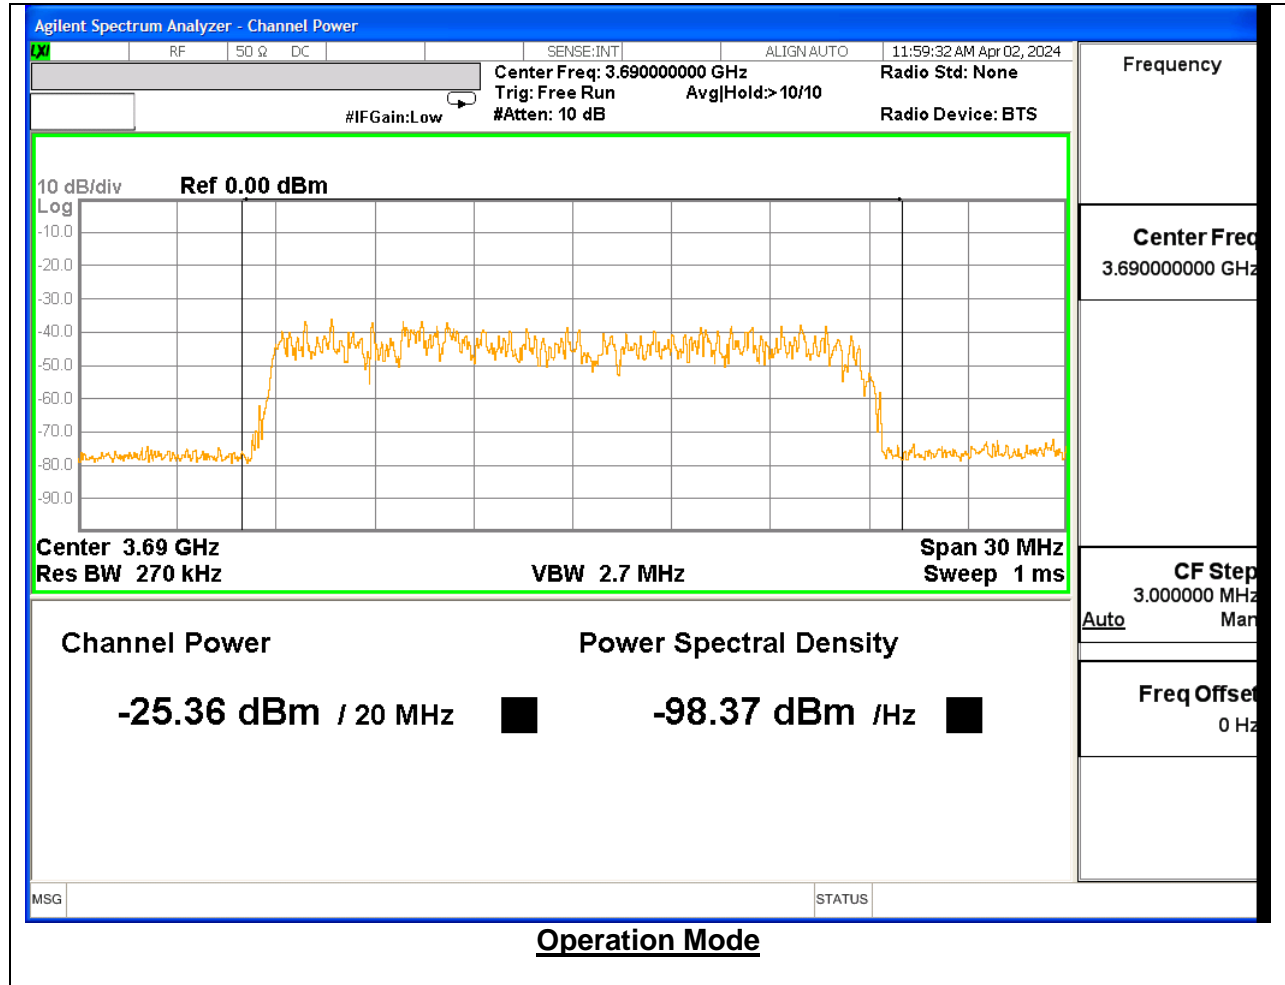

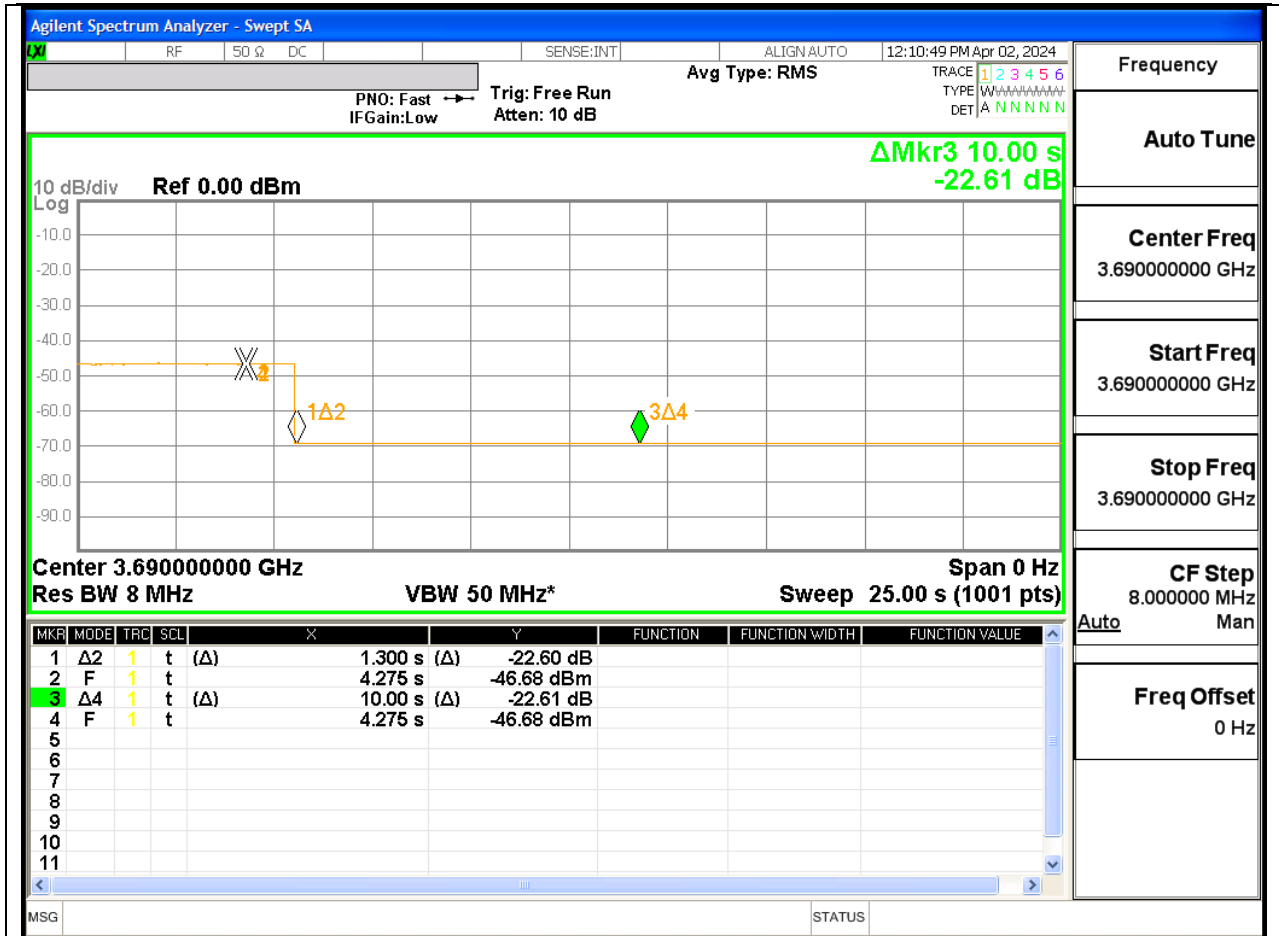

Stop Operation Within 10 second Mode

NOTE:

- Marker 1: Authorized CBSD sends a signal to stop B48 transmission.
- Marker 2: Time elapsed since signal to stop B48 transmission. EUD has stopped transmission.
- Marker 3-4 Delta: 10 seconds has elapsed since CBSD has sent a signal to stop B48 transmission to EUT.

9. SETUP PHOTOS

Please refer to 15107843-EP1 for test setup description and setup photos

END OF REPORT