



Report No. : FR322116

FCC RADIO TEST REPORT

FCC ID : A4RG3MP5

Equipment: Wireless Device

Model Name : G3MP5

Applicant : Google LLC

1600 Amphitheatre Parkway,

Mountain View, California, 94043 USA

Standard : FCC Part 15 Subpart C §15.247

The product was received on Feb. 24, 2023 and testing was performed from Mar. 01, 2023 to Mar. 24, 2023. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.

Approved by: Louis Wu

TEL: 886-3-327-0868

Louis Wa

Sporton International Inc. Wensan Laboratory

Page Number

: 1 of 36

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)

Table of Contents

Report No.: FR322116

His	tory o	of this test report	3
Sur	nmary	y of Test Result	4
1	Gene	eral Description	5
	1.1	Product Feature of Equipment Under Test	5
	1.2	Product Specification of Equipment Under Test	5
	1.3	Modification of EUT	5
	1.4	Testing Location	6
	1.5	Applicable Standards	6
2	Test	Configuration of Equipment Under Test	7
	2.1	Carrier Frequency Channel	7
	2.2	Test Mode	8
	2.3	Connection Diagram of Test System	9
	2.4	Support Unit used in test configuration and system	9
	2.5	EUT Operation Test Setup	10
	2.6	Measurement Results Explanation Example	10
3	Test	Result	11
	3.1	6dB and 99% Bandwidth Measurement	11
	3.2	Output Power Measurement	16
	3.3	Power Spectral Density Measurement	17
	3.4	Conducted Band Edges and Spurious Emission Measurement	22
	3.5	Radiated Band Edges and Spurious Emission Measurement	28
	3.6	AC Conducted Emission Measurement	32
	3.7	Antenna Requirements	34
4	List	of Measuring Equipment	35
5	Meas	surement Uncertainty	36
Apı	pendix	x A. Conducted Test Results	
Apı	pendix	x B. AC Conducted Emission Test Result	
Apı	pendix	x C. Radiated Spurious Emission	
Apı	pendix	x D. Radiated Spurious Emission Plots	
Apı	pendix	x E. Duty Cycle Plots	
Apı	pendix	x F. Setup Photographs	

History of this test report

Report No.: FR322116

Report No.	Version	Description	Issue Date
FR322116	01	Initial issue of report	May 26, 2023
FR322116	02	Revised Product Feature of Equipment Under Test This report is an updated version, replacing the report issued on May 26, 2023	Jun. 13, 2023

TEL: 886-3-327-0868 Page Number : 3 of 36 FAX: 886-3-327-0855 Issue Date : Jun. 13, 2023

Summary of Test Result

Report No.: FR322116

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.247(a)(2)	6dB Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Reporting only	-
3.2	15.247(b)(3) 15.247(b)(4)	Output Power	Pass	-
3.3	15.247(e)	Power Spectral Density	Pass	-
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	Pass	-
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	Pass	6.14 dB under the limit at 959.260 MHz
3.6	15.207	AC Conducted Emission	Pass	18.86 dB under the limit at 0.240 MHz
3.7	15.203	Antenna Requirement	Pass	-

Conformity Assessment Condition:

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against
 the regulation limits or in accordance with the requirements stipulated by the
 applicant/manufacturer who shall bear all the risks of non-compliance that may potentially
 occur if measurement uncertainty is taken into account.
- The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Yun Huang Report Producer: Dewi Huang

TEL: 886-3-327-0868 Page Number : 4 of 36 FAX: 886-3-327-0855 Issue Date : Jun. 13, 2023

1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature			
Equipment	Wireless Device		
FCC ID	A4RG3MP5		
Model Name	G3MP5		
EUT supports Radios application	Bluetooth-LE		

Report No.: FR322116

Remark: The above EUT's information was declared by manufacturer.

EUT Information List			
S/N Performed Test Item			
425A3216E021	RF Conducted Measurement		
4248B696F041	Radiated Spurious Emission		
42567B16F021	Conducted Emission		

1.2 Product Specification of Equipment Under Test

Product Specification is subject to this standard				
Tx/Rx Frequency Range	2402 MHz ~ 2480 MHz			
Number of Channels	40			
Carrier Frequency of Each Channel	40 Channel (37 hopping + 3 advertising channel)			
Maximum Output Bower to Antonno	Bluetooth – LE (1Mbps): 6.70 dBm / 0.0047 W			
Maximum Output Power to Antenna	Bluetooth – LE (2Mbps): 6.60 dBm / 0.0046 W			
99% Occupied Bandwidth	Bluetooth – LE (1Mbps): 1.043 MHz			
99% Occupied Baildwidth	Bluetooth – LE (2Mbps): 2.046 MHz			
Antenna Type / Gain	Slot Antenna with gain -5.7 dBi			
Type of Modulation	Bluetooth - LE: GFSK			

Remark: The above EUT's information was declared by manufacturer. Please refer to Disclaimer in report summary.

1.3 Modification of EUT

No modifications made to the EUT during the testing.

TEL: 886-3-327-0868 Page Number : 5 of 36 FAX: 886-3-327-0855 Issue Date : Jun. 13, 2023

1.4 Testing Location

Test Site	Sporton International Inc. EMC & Wireless Communications Laboratory		
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978		
Toot Site No	Sporton Site No.		
Test Site No.	CO05-HY (TAF Code:1190)		
Remark	The Conducted Emission test item subcontracted to Sporton International Inc. EMC & Wireless Communications Laboratory.		

Report No.: FR322116

Note: The test site complies with ANSI C63.4 2014 requirement.

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sporton Site No. TH05-HY, 03CH22-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW1190 and TW3786

1.5 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15 Subpart C §15.247
- FCC KDB Publication No. 558074 D01 15.247 Meas Guidance v05r02
- FCC KDB 414788 D01 Radiated Test Site v01r01
- ANSI C63.10-2013

Remark:

- 1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
- 2. The TAF code is not including all the FCC KDB listed without accreditation.

TEL: 886-3-327-0868 Page Number : 6 of 36 FAX: 886-3-327-0855 Issue Date : Jun. 13, 2023

2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
	0	2402	21	2444
		2404	22	2446
	2	2406	23	2448
	3	2408	24	2450
	4	2410	25	2452
	5	2412	26	2454
	6	2414	27	2456
	7	2416	28	2458
	8	2418	29	2460
	9	2420	30	2462
2400-2483.5 MHz	10	2422	31	2464
	11	2424	32	2466
	12	2426	33	2468
	13	2428	34	2470
	14	2430	35	2472
	15	2432	36	2474
	16	2434	37	2476
	17	2436	38	2478
	18	2438	39	2480
	19	2440	-	-
	20	2442	-	-

Report No.: FR322116

2.2 Test Mode

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape), and adjusting the measurement antenna orientation, following C63.10 exploratory test procedures and only the worst case emissions were reported in this report.

Report No.: FR322116

b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard


ne following summary table is snowing all test modes to demonstrate in compliance with the standard.						
	Summary table of Test Cases					
Test Item	Data Rate / Modulation					
	Bluetooth – LE / GFSK					
	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps					
Conducted	Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps					
Test Cases	Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps					
Test Cases	Mode 4: Bluetooth Tx CH00_2402 MHz_2Mbps					
	Mode 5: Bluetooth Tx CH19_2440 MHz_2Mbps					
	Mode 6: Bluetooth Tx CH39_2480 MHz_2Mbps					
	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps					
	Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps					
Radiated	Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps					
Test Cases	Mode 4: Bluetooth Tx CH00_2402 MHz_2Mbps					
	Mode 5: Bluetooth Tx CH19_2440 MHz_2Mbps					
	Mode 6: Bluetooth Tx CH39_2480 MHz_2Mbps					
AC Conducted	Made 1: Plusteeth I E Link + USP Cable (Charging from Adopter)					
Emission Mode 1: Bluetooth-LE Link + USB Cable (Charging from Adapter)						
Remark: For radiation spurious emission, the modulation and the data rate picked for testing are						

determined by the Max. RF conducted power.

TEL: 886-3-327-0868 Page Number : 8 of 36 FAX: 886-3-327-0855 Issue Date : Jun. 13, 2023


2.3 Connection Diagram of Test System

<AC Conducted Emission Mode>

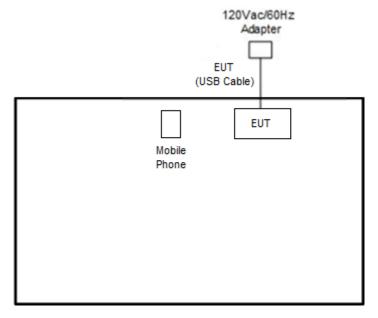

Report No.: FR322116

<Bluetooth - LE Tx Mode>

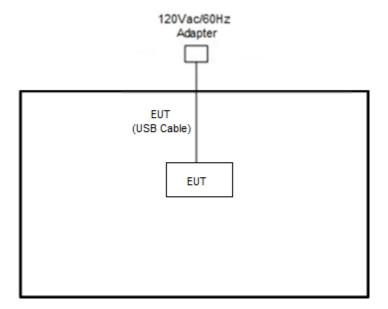

2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Adapter	Google	G1001	N/A	N/A	N/A
2.	Adapter	Google	G9BR1 LPS	N/A	N/A	N/A
3.	Mobile Phone	Apple	A1586	N/A	N/A	N/A

TEL: 886-3-327-0868 Page Number : 9 of 36 FAX: 886-3-327-0855 Issue Date : Jun. 13, 2023

2.5 EUT Operation Test Setup

The RF test items, utility "Tera Term Version 4.89(SVN#6182)" was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

Report No.: FR322116

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10 dB attenuator.

 $Offset(dB) = RF \ cable \ loss(dB) + attenuator \ factor(dB).$ = 4.2 + 10 = 14.2 (dB)

TEL: 886-3-327-0868 Page Number : 10 of 36
FAX: 886-3-327-0855 Issue Date : Jun. 13, 2023

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

3.1.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.


3.1.3 Test Procedures

- 1. The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 11.8.1 (6dB BW).
- 2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.

Report No.: FR322116

- 3. Set the maximum power setting and enable the EUT to transmit continuously.
- 4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6dB bandwidth must be greater than 500 kHz.
- For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set
 1-5% of the emission bandwidth and set the Video bandwidth (VBW) ≥ 3 * RBW.
- 6. Measure and record the results in the test report.

3.1.4 Test Setup




TEL: 886-3-327-0868 Page Number : 11 of 36 FAX: 886-3-327-0855 Issue Date : Jun. 13, 2023

3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.


<1Mbps>

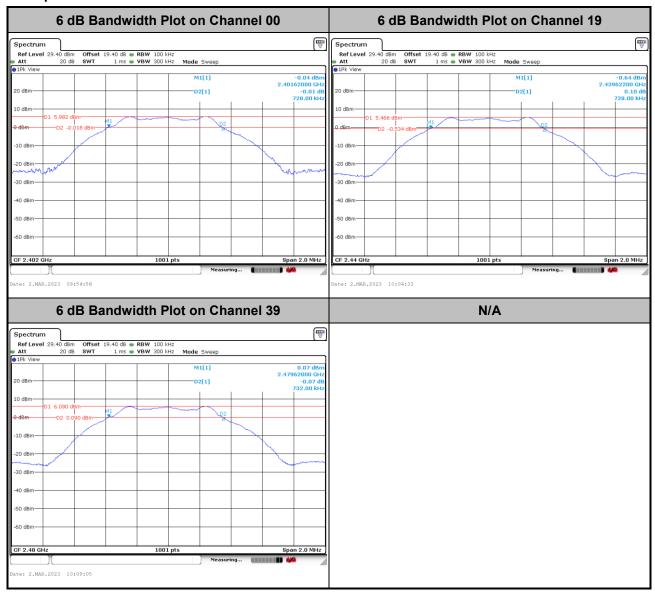

Report No.: FR322116

TEL: 886-3-327-0868 Page Number : 12 of 36 FAX: 886-3-327-0855 Issue Date : Jun. 13, 2023 : 02

<2Mbps>

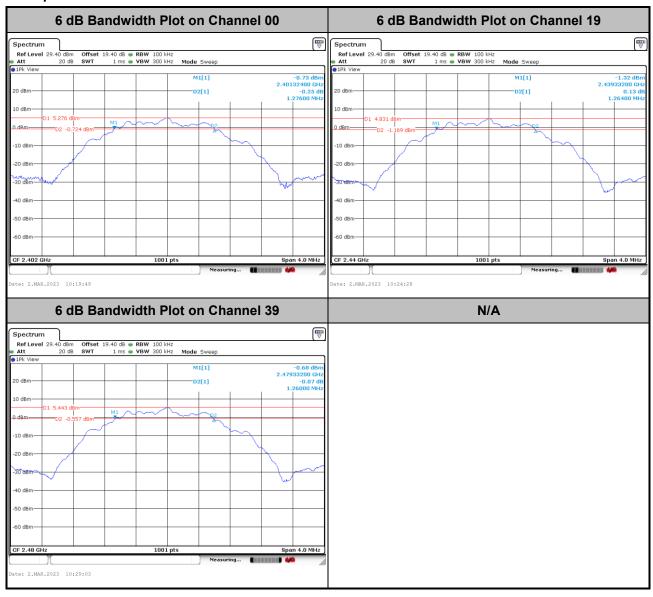


Report No.: FR322116

TEL: 886-3-327-0868 Page Number : 13 of 36 FAX: 886-3-327-0855 Issue Date : Jun. 13, 2023

3.1.6 Test Result of 99% Occupied Bandwidth

Please refer to Appendix A.

<1Mbps>

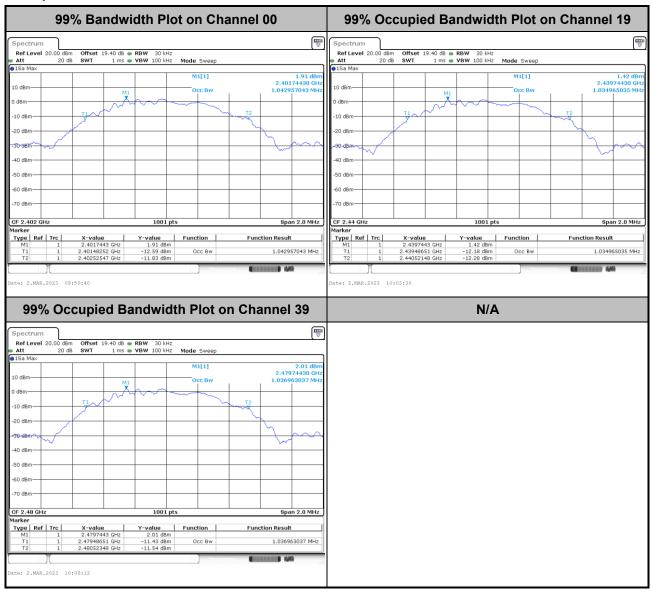


Report No.: FR322116

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

TEL: 886-3-327-0868 Page Number : 14 of 36 FAX: 886-3-327-0855 Issue Date : Jun. 13, 2023

<2Mbps>

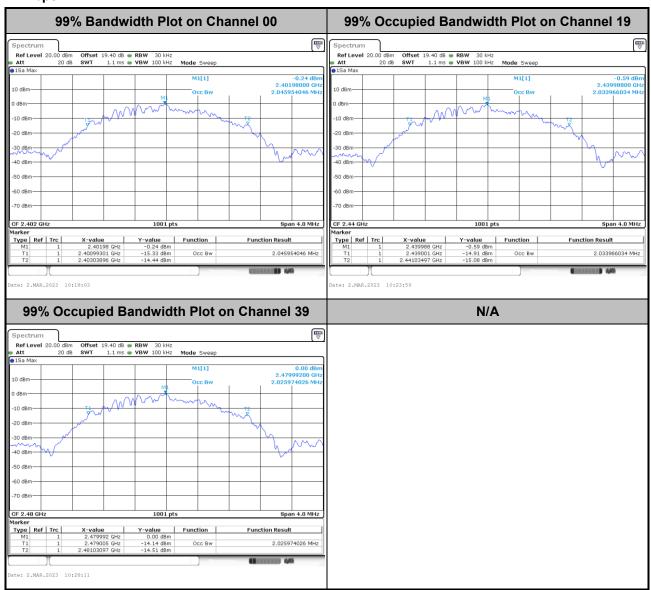

Report No.: FR322116

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

TEL: 886-3-327-0868 Page Number : 15 of 36 FAX: 886-3-327-0855 Issue Date : Jun. 13, 2023

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5 MHz, the limit for output power is 30 dBm. If transmitting antenna of directional gain greater than 6 dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

Report No.: FR322116


3.2.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.2.3 Test Procedures

- For Average Power, the testing follows ANSI C63.10 Section 11.9.2.3.2 Method AVGPM-G
- 2. The RF output of EUT is connected to the power meter by RF cable and attenuator.
- 3. The path loss is compensated to the results for each measurement.
- 4. Set the maximum power setting and enable the EUT to transmit continuously.
- 5. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup



3.2.5 Test Result of Average Output Power

Please refer to Appendix A.

TEL: 886-3-327-0868 Page Number : 16 of 36 FAX: 886-3-327-0855 Issue Date : Jun. 13, 2023

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8 dBm in any 3 kHz band at any time interval of continuous transmission.

Report No.: FR322116


3.3.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.3.3 Test Procedures

- 1. The testing follows the ANSI C63.10 Section 11.10.2 Method PKPSD.
- 2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
- 3. Set the maximum power setting and enable the EUT to transmit continuously.
- 4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth (VBW) = 10 kHz. In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6 dB BW)
- 5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
- 6. Measure and record the results in the test report.
- 7. The Measured power density (dBm)/ 100 kHz is a reference level and is used as 20 dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

3.3.4 Test Setup




3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

TEL: 886-3-327-0868 Page Number : 17 of 36
FAX: 886-3-327-0855 Issue Date : Jun. 13, 2023

3.3.6 Test Result of Power Spectral Density Plots (100kHz)


<1Mbps>

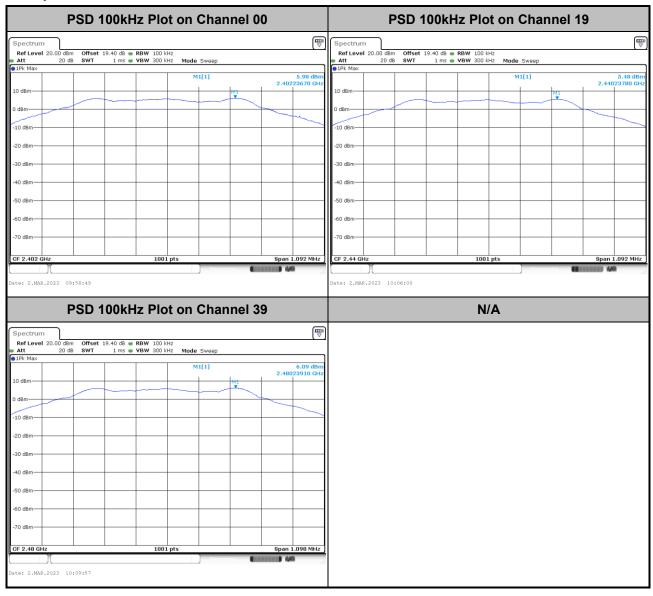

Report No.: FR322116

TEL: 886-3-327-0868 Page Number : 18 of 36
FAX: 886-3-327-0855 Issue Date : Jun. 13, 2023

<2Mbps>

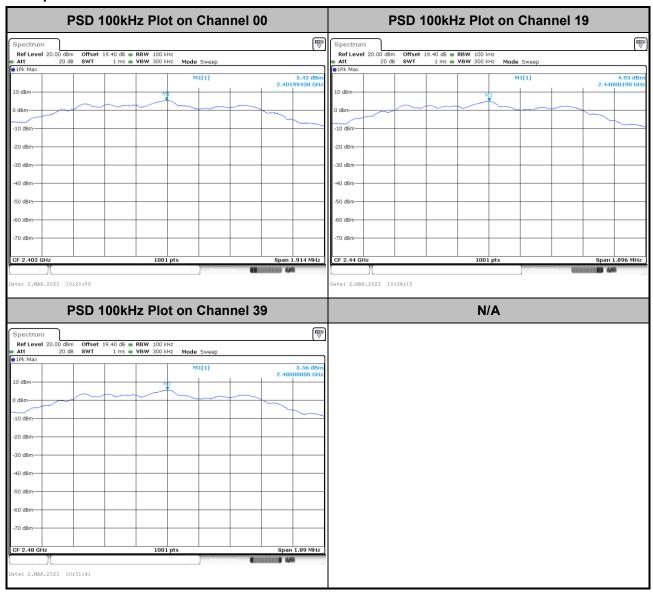


Report No.: FR322116

TEL: 886-3-327-0868 Page Number : 19 of 36
FAX: 886-3-327-0855 Issue Date : Jun. 13, 2023

3.3.7 Test Result of Power Spectral Density Plots (3kHz)


<1Mbps>

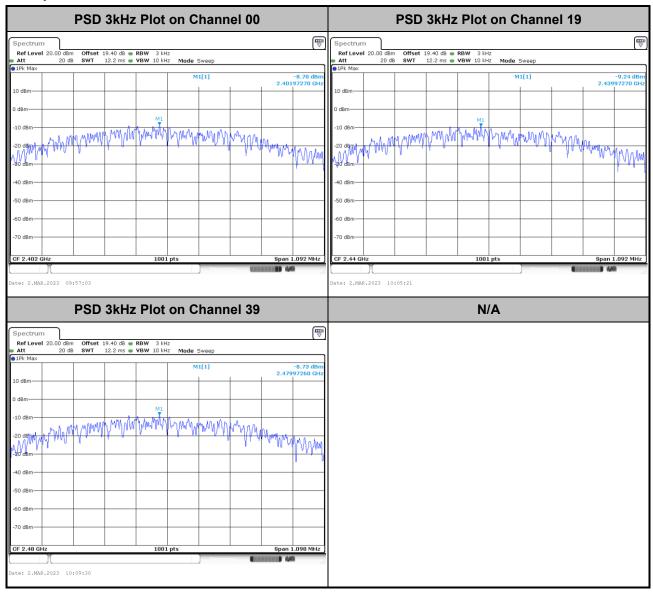

Report No.: FR322116

TEL: 886-3-327-0868 Page Number : 20 of 36 FAX: 886-3-327-0855 Issue Date : Jun. 13, 2023

<2Mbps>

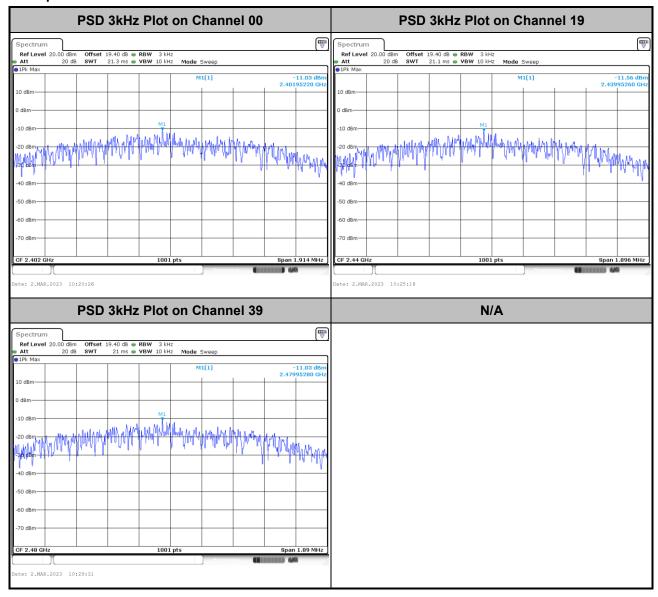

Report No.: FR322116

TEL: 886-3-327-0868 Page Number : 21 of 36 FAX: 886-3-327-0855 Issue Date : Jun. 13, 2023

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 30 dB down from the highest emission level within the authorized band.

Report No.: FR322116


3.4.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.4.3 Test Procedure

- 1. The testing follows the ANSI C63.10 Section 11.11.3 Emission level measurement.
- 2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
- 3. Set the maximum power setting and enable the EUT to transmit continuously.
- 4. Set RBW = 100 kHz, VBW = 300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
- 5. Measure and record the results in the test report.
- 6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.


3.4.4 Test Setup



TEL: 886-3-327-0868 Page Number : 22 of 36
FAX: 886-3-327-0855 Issue Date : Jun. 13, 2023


3.4.5 Test Result of Conducted Band Edges Plots

<1Mbps>

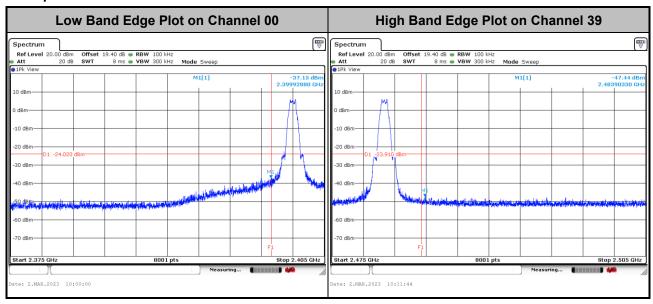

Report No.: FR322116


<2Mbps>

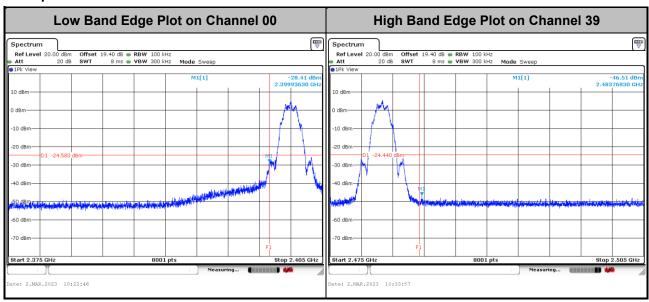

TEL: 886-3-327-0868 Page Number : 23 of 36 FAX: 886-3-327-0855 Issue Date : Jun. 13, 2023


3.4.6 Test Result of Conducted Spurious Emission Plots

<1Mbps>

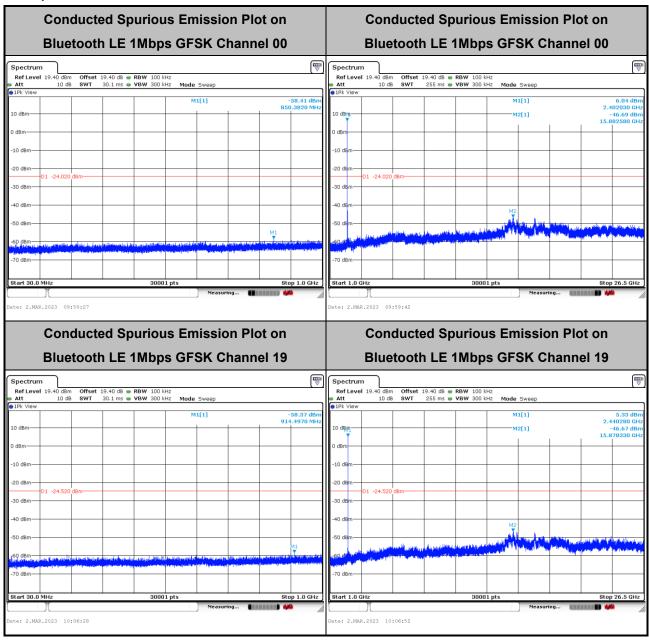

Report No.: FR322116


TEL: 886-3-327-0868 : 24 of 36 Page Number FAX: 886-3-327-0855 Issue Date : Jun. 13, 2023 : 02

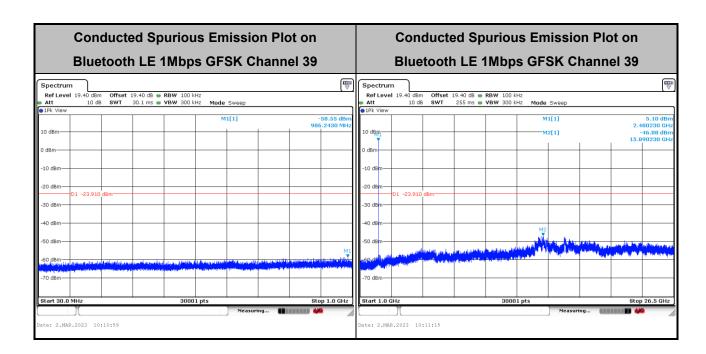

Report No.: FR322116


TEL: 886-3-327-0868 Page Number : 25 of 36 FAX: 886-3-327-0855 Issue Date : Jun. 13, 2023

<2Mbps>

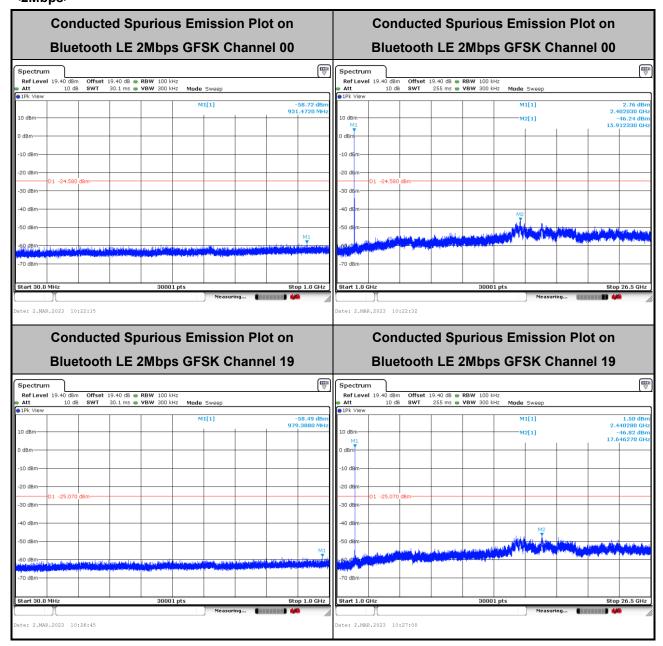

Report No.: FR322116

TEL: 886-3-327-0868 Page Number : 26 of 36 FAX: 886-3-327-0855 Issue Date : Jun. 13, 2023 : 02

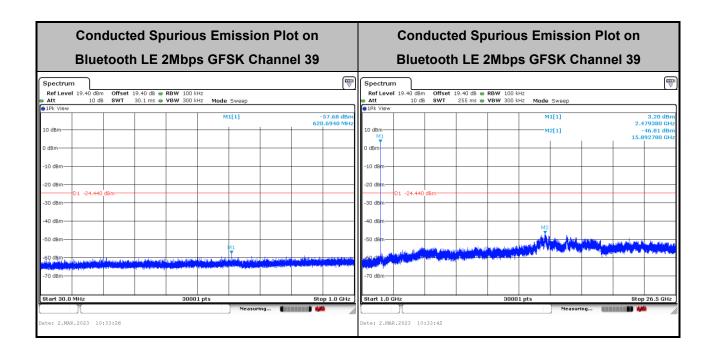

Report No.: FR322116

TEL: 886-3-327-0868 Page Number : 27 of 36
FAX: 886-3-327-0855 Issue Date : Jun. 13, 2023

3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device is measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Report No.: FR322116

Frequency	Field Strength	Measurement Distance	
(MHz)	(microvolts/meter)	(meters)	
0.009 - 0.490	2400/F(kHz)	300	
0.490 - 1.705	24000/F(kHz)	30	
1.705 – 30.0	30	30	
30 – 88	100	3	
88 – 216	150	3	
216 - 960	200	3	
Above 960	500	3	

3.5.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

TEL: 886-3-327-0868 Page Number : 28 of 36 FAX: 886-3-327-0855 Issue Date : Jun. 13, 2023

3.5.3 Test Procedures

- 1. The testing follows the ANSI C63.10 Section 11.12.1 Radiated emission measurements.
- 2. The EUT is arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.


Report No. : FR322116

- The EUT is placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
- 4. The EUT is set 3 meters away from the receiving antenna, which is mounted on the top of a variable height antenna tower.
- 5. Corrected Reading: Antenna Factor + Cable Loss + Read Level Preamp Factor = Level
- 6. Radiated testing below 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading. When there is no suspected emission found and the emission level is with at least 6 dB margin against QP limit line, the position is marked as "-".
- 7. Radiated testing above 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading for scanning all frequencies. When there is no suspected emission found and the harmonic emission level is with at least 6 dB margin against average limit line, the position is marked as "-".
- 8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW = 100 kHz for f < 1 GHz; VBW ≥ RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW = 3 MHz for $f \ge 1$ GHz for peak measurement. For average measurement:
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW ≥ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

TEL: 886-3-327-0868 Page Number : 29 of 36
FAX: 886-3-327-0855 Issue Date : Jun. 13, 2023


3.5.4 Test Setup

For radiated test below 30MHz

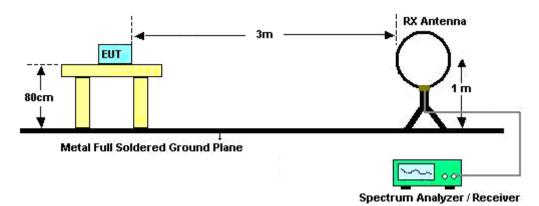


Report No.: FR322116

For radiated test from 30MHz to 1GHz

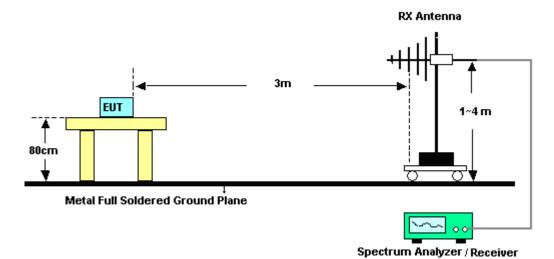


For radiated test from 1GHz to 18GHz

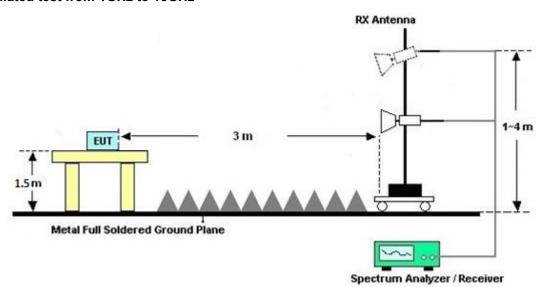

TEL: 886-3-327-0868 Page Number : 30 of 36 FAX: 886-3-327-0855 Issue Date : Jun. 13, 2023

For radiated test above 18GHz

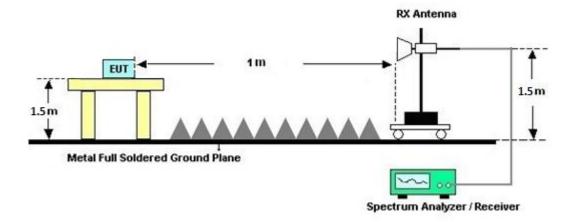

Report No.: FR322116

3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which starts from 9 kHz to 30 MHz, is pre-scanned and the result which is 20 dB lower than the limit line is not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result comes out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C and D.

3.5.7 Duty Cycle

Please refer to Appendix E.

3.5.8 Test Result of Radiated Spurious Emission (30 MHz ~ 10th Harmonic)

Please refer to Appendix C and D.

TEL: 886-3-327-0868 Page Number : 31 of 36 FAX: 886-3-327-0855 Issue Date : Jun. 13, 2023

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Report No.: FR322116

Frequency of emission (MHz)	Conducted limit (dBμV)		
Frequency of emission (MHZ)	Quasi-peak	Average	
0.15-0.5	66 to 56*	56 to 46*	
0.5-5	56	46	
5-30	60	50	

^{*}Decreases with the logarithm of the frequency.

3.6.2 Measuring Instruments


Please refer to the measuring equipment list in this test report.

3.6.3 Test Procedures

- 1. The EUT is placed 0.4 meter away from the conducting wall of the shielding room, and is kept at least 80 centimeters from any other grounded conducting surface.
- 2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
- 3. All the support units are connecting to the other LISN.
- 4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
- 5. The FCC states that a 50 ohm, 50 microhenry LISN shall be used.
- 6. Both Line and Neutral shall be tested in order to find out the maximum conducted emission.
- 7. The frequency range from 150 kHz to 30 MHz is scanned.
- Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9 kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

TEL: 886-3-327-0868 Page Number : 32 of 36 FAX: 886-3-327-0855 Issue Date : Jun. 13, 2023

3.6.4 Test Setup

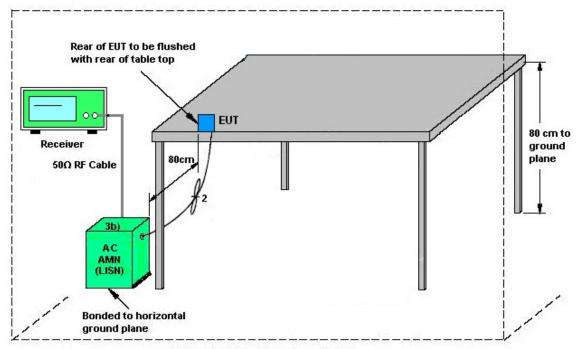

Report No.: FR322116

AMN = Artificial mains network (LISN)

AE = Associated equipment

EUT = Equipment under test

ISN = Impedance stabilization network

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.

TEL: 886-3-327-0868 Page Number : 33 of 36 FAX: 886-3-327-0855 Issue Date : Jun. 13, 2023

3.7 Antenna Requirements

3.7.1 Standard Applicable

The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

Report No.: FR322116

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

TEL: 886-3-327-0868 Page Number : 34 of 36 FAX: 886-3-327-0855 Issue Date : Jun. 13, 2023

4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Sep. 20, 2022	Mar. 20, 2023~ Mar. 24, 2023	Sep. 19, 2023	Radiation (03CH22-HY)
Bilog Antenna with 6dB pad	TESEQ & WOKEN	CBL 6111D & 00802N1D-06	63304 & 002	N/A	Oct. 04, 2022	Mar. 20, 2023~ Mar. 24, 2023	Oct. 03, 2023	Radiation (03CH22-HY)
Amplifier	SONOMA	310N	421581	N/A	Jul. 16, 2022	Mar. 20, 2023~ Mar. 24, 2023	Jul. 15, 2023	Radiation (03CH22-HY)
Double Ridged Guide Horn Antenna	RFSPIN	DRH18-E	LE2C05A18E N	1GHz~18GHz	Jul. 06, 2022	Mar. 20, 2023~ Mar. 24, 2023	Jul. 05, 2023	Radiation (03CH22-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA9170	00991	18GHz-40GHz	May 14, 2022	Mar. 20, 2023~ Mar. 24, 2023	May 13, 2023	Radiation (03CH22-HY)
Amplifier	EMEC	EM01G18GA	060877	N/A	Sep. 29, 2022	Mar. 20, 2023~ Mar. 24, 2023	Sep. 28, 2023	Radiation (03CH22-HY)
Preamplifier	EMEC	EM18G40G	060872	18-40GHz	Sep. 28, 2022	Mar. 20, 2023~ Mar. 24, 2023	Sep. 27, 2023	Radiation (03CH22-HY)
Signal Analyzer	Keysight	N9010B	MY60241058	N/A	Jul. 07, 2022	Mar. 20, 2023~ Mar. 24, 2023	Jul. 06, 2023	Radiation (03CH22-HY)
Hygrometer	TECPEL	DTM-303B	TP140325	N/A	Nov. 07, 2022	Mar. 20, 2023~ Mar. 24, 2023	Nov. 06, 2023	Radiation (03CH22-HY)
Controller	EMEC	EM1000	N/A	Control Turn table & Ant Mast	N/A	Mar. 20, 2023~ Mar. 24, 2023	N/A	Radiation (03CH22-HY)
Antenna Mast	ChainTek	MBS-520-1	N/A	1m~4m	N/A	Mar. 20, 2023~ Mar. 24, 2023	N/A	Radiation (03CH22-HY)
Turn Table	ChainTek	T-200-S-1	N/A	0~360 Degree	N/A	Mar. 20, 2023~ Mar. 24, 2023	N/A	Radiation (03CH22-HY)
Software	Audix	E3 6.09824_2019 122	RK-002347	N/A	N/A	Mar. 20, 2023~ Mar. 24, 2023	N/A	Radiation (03CH22-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	803951/2	9kHz~30MHz	Mar. 07, 2023	Mar. 20, 2023~ Mar. 24, 2023	Mar. 06, 2024	Radiation (03CH22-HY)
RF Cable <u>javascrip</u> <u>t: void(0)</u>	HUBER + SUHNER	SUCOFLEX 102	804390/2,804 611/2,804615/ 2	N/A	Oct. 25, 2022	Mar. 20, 2023~ Mar. 24, 2023	Oct. 24, 2023	Radiation (03CH22-HY)
Hygrometer	TECPEL	DTM-303A	TP201996	N/A	Nov. 17, 2022	Mar. 01, 2023~ Mar. 03, 2023	Nov. 16, 2023	Conducted (TH05-HY)
Power Sensor	DARE	RPR3006W	16I00054SNO 12 (NO:113)	10MHz~6GHz	Dec. 13, 2022	Mar. 01, 2023~ Mar. 03, 2023	Dec. 12, 2023	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV40	101905	10Hz - 40GHz	Aug. 03, 2022	Mar. 01, 2023~ Mar. 03, 2023	Aug. 02, 2023	Conducted (TH05-HY)
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Mar. 01, 2023	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102388	9kHz~3.6GHz	Dec. 01, 2022	Mar. 01, 2023	Nov. 30, 2023	Conduction (CO05-HY)
Hygrometer	Testo	608-H1	34913912	N/A	Nov. 17, 2022	Mar. 01, 2023	Nov. 16, 2023	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100081	9kHz~30MHz	Nov. 17, 2022	Mar. 01, 2023	Nov. 16, 2023	Conduction (CO05-HY)
Software	Rohde & Schwarz	EMC32	N/A	N/A	N/A	Mar. 01, 2023	N/A	Conduction (CO05-HY)
Pulse Limiter	SCHWARZBE CK	VTSD 9561-F N	00691	N/A	Aug. 01, 2022	Mar. 01, 2023	Jul. 31, 2023	Conduction (CO05-HY)
LISN Cable	MVE	RG-400	260260	N/A	Dec. 29, 2022	Mar. 01, 2023	Dec. 28, 2023	Conduction (CO05-HY)

Report No.: FR322116

TEL: 886-3-327-0868 Page Number : 35 of 36 FAX: 886-3-327-0855 Issue Date : Jun. 13, 2023

5 Measurement Uncertainty

<u>Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)</u>

Measuring Uncertainty for a Level of Confidence	3,50 dB	
of 95% (U = 2Uc(y))	3.30 dB	

Report No.: FR322116

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence	5.92 dB
of 95% (U = 2Uc(y))	3.92 UB

<u>Uncertainty of Radiated Emission Measurement (1000 MHz ~ 6000 MHz)</u>

Measuring Uncertainty for a Level of Confidence	4.42 dB	
of 95% (U = 2Uc(y))	4.42 UB	

Uncertainty of Radiated Emission Measurement (6000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence	4.40 dB
of 95% (U = 2Uc(y))	7.73 00

<u>Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)</u>

Measuring Uncertainty for a Level of Confidence	5.38 dB
of 95% (U = 2Uc(y))	3.36 UB

TEL: 886-3-327-0868 Page Number : 36 of 36 FAX: 886-3-327-0855 Issue Date : Jun. 13, 2023

Report Number : FR322116

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Henry Ke	Temperature:	21~25	°C
Test Date:	2023/3/1~2023/3/3	Relative Humidity:	51~54	%

TEST RESULTS DATA 6dB and 99% Occupied Bandwidth

Mod	Data Rate	N⊤x	(MHz) BW (MHz)		Occupied BW	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	1Mbps	1	0	2402	1.043	0.728	0.50	Pass
BLE	1Mbps	1	19	2440	1.035	0.728	0.50	Pass
BLE	1Mbps	1	39	2480	1.037	0.732	0.50	Pass

TEST RESULTS DATA Average Power Table

Mod.	Data Rate	N⊤x	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	1Mbps	1	0	2402	6.70	30.00	-5.60	1.10	36.00	Pass
BLE	1Mbps	1	19	2440	6.50	30.00	- 5.60	0.90	36.00	Pass
BLE	1Mbps	1	39	2480	6.60	30.00	-5.60	1.00	36.00	Pass

TEST RESULTS DATA Peak Power Density

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	1Mbps	1	0	2402	5.98	- 8.70	-5.60	8.00	Pass
BLE	1Mbps	1	19	2440	5.48	-9.24	-5.60	8.00	Pass
BLE	1Mbps	1	39	2480	6.09	-8.73	-5.60	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.

Report Number : FR322116

TEST RESULTS DATA 6dB and 99% Occupied Bandwidth

Mod.	Data Rate	N⊤x	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	2Mbps	1	0	2402	2.046	1.276	0.50	Pass
BLE	2Mbps	1	19	2440	2.034	1.264	0.50	Pass
BLE	2Mbps	1	39	2480	2.026	1.260	0.50	Pass

TEST RESULTS DATA Average Power Table

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	2Mbps	1	0	2402	6.60	30.00	-5.60	1.00	36.00	Pass
BLE	2Mbps	1	19	2440	6.50	30.00	-5.60	0.90	36.00	Pass
BLE	2Mbps	1	39	2480	6.50	30.00	-5.60	0.90	36.00	Pass

TEST RESULTS DATA Peak Power Density

Mod.	Data Rate	N⊤x	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	2Mbps	1	0	2402	5.42	-11.03	- 5.60	8.00	Pass
BLE	2Mbps	1	19	2440	4.93	-11.56	-5.60	8.00	Pass
BLE	2Mbps	1	39	2480	5.56	-11.03	-5.60	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.

Appendix B. AC Conducted Emission Test Results

Took Empires v	Calvin Mana	Temperature :	23~26°C
Test Engineer :	Calvin wang	Relative Humidity :	45~55%

Report No.: FR322116

TEL: 886-3-327-0868 Page Number : B1 of B

EUT Information


 Report NO :
 322116

 Test Mode :
 Mode 1

 Test Voltage :
 120Vac/60Hz

Phase: Line

FullSpectrum

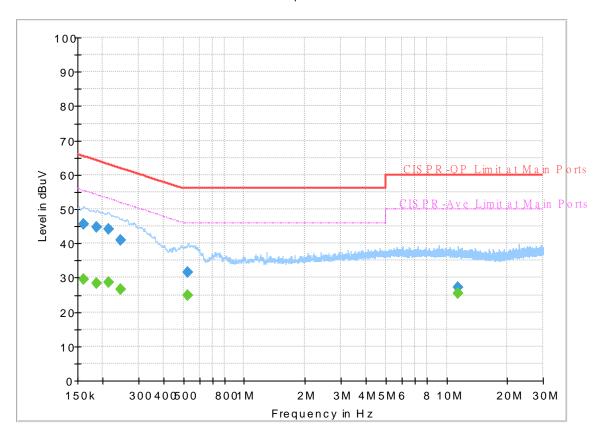


Final Result

Frequency	QuasiPeak	CAverage	Limit	Margin	Line	Filter	Corr.
(MHz)	(dBuV)	(dBuV)	(dBuV)	(dB)			(dB)
0.161250		29.48	55.40	25.92	L1	OFF	19.9
0.161250	45.54		65.40	19.86	L1	OFF	19.9
0.186000		28.51	54.21	25.70	L1	OFF	19.9
0.186000	44.71	-	64.21	19.50	L1	OFF	19.9
0.213000		28.59	53.09	24.50	L1	OFF	19.9
0.213000	44.22		63.09	18.87	L1	OFF	19.9
0.244500		26.63	51.94	25.31	L1	OFF	19.9
0.244500	41.02	-	61.94	20.92	L1	OFF	19.9
0.528000		24.98	46.00	21.02	L1	OFF	19.9
0.528000	31.50	-	56.00	24.50	L1	OFF	19.9
11.451750		25.45	50.00	24.55	L1	OFF	20.3
11.451750	27.22		60.00	32.78	L1	OFF	20.3

EUT Information

Report NO: 322116
Test Mode: Mode 1
Test Voltage: 120Vac/60Hz
Phase: Neutral

FullSpectrum

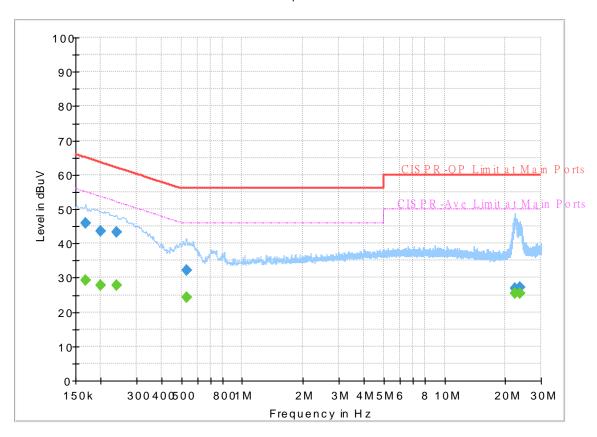

Final_Result

Frequency	QuasiPeak	CAverage	Limit	Margin	Line	Filter	Corr.
(MHz)	(dBuV)	(dBuV)	(dBuV)	(dB)			(dB)
0.168000		29.33	55.06	25.73	N	OFF	19.9
0.168000	45.89		65.06	19.17	N	OFF	19.9
0.199500		27.65	53.63	25.98	N	OFF	19.9
0.199500	43.70		63.63	19.93	N	OFF	19.9
0.240000		27.74	52.10	24.36	N	OFF	19.9
0.240000	43.24	-	62.10	18.86	N	OFF	19.9
0.530250		24.25	46.00	21.75	N	OFF	19.9
0.530250	32.04		56.00	23.96	N	OFF	19.9
22.274250		25.34	50.00	24.66	N	OFF	20.7
22.274250	26.94	-	60.00	33.06	N	OFF	20.7
23.658000		25.51	50.00	24.49	N	OFF	20.7
23.658000	27.06	-	60.00	32.94	N	OFF	20.7

Appendix C. Radiated Spurious Emission

Test Engineer :	Leo Li	Temperature :	22.1~23.1°C
rest Engineer.		Relative Humidity :	55~60%

Report No.: FR322116

<1Mbps>

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
					Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBµV/m)	(dB)	(dBµV/m)	(dB _µ V)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
		2327.115	51.16	-22.84	74	37.62	27.1	18.86	32.42	307	326	Р	Н
		2325.54	41.49	-12.51	54	27.95	27.1	18.86	32.42	307	326	Α	Н
	*	2402	98.12	-	-	84.49	27.1	19	32.47	307	326	Р	Н
BLE	*	2402	97.59	-	-	83.96	27.1	19	32.47	307	326	Α	Н
CH 00													Н
2402MHz		2390	51.5	-22.5	74	37.89	27.1	18.98	32.47	165	351	Р	V
2402111112		2389.905	42.02	-11.98	54	28.41	27.1	18.98	32.47	165	351	Α	V
	*	2402	95.26	-	-	81.63	27.1	19	32.47	165	351	Р	V
	*	2402	94.55	-	-	80.92	27.1	19	32.47	165	351	Α	V
													V
		2365.52	51.79	-22.21	74	38.21	27.1	18.93	32.45	335	350	Р	Н
		2385.68	41.59	-12.41	54	27.98	27.1	18.97	32.46	335	350	Α	Н
	*	2440	99.26	-	-	85.66	27.02	19.08	32.5	335	350	Р	Н
	*	2440	98.53	-	-	84.93	27.02	19.08	32.5	335	350	Α	Н
D. E		2489.28	51.1	-22.9	74	37.62	26.84	19.17	32.53	335	350	Р	Н
BLE CH 19		2496.88	41.61	-12.39	54	28.15	26.81	19.19	32.54	335	350	Α	Н
2440MHz		2380.72	51.61	-22.39	74	38.01	27.1	18.96	32.46	166	344	Р	V
2440111112		2363.6	41.5	-12.5	54	27.92	27.1	18.93	32.45	166	344	Α	٧
	*	2440	98.63	-	-	85.03	27.02	19.08	32.5	166	344	Р	٧
	*	2440	98.15	-	-	84.55	27.02	19.08	32.5	166	344	Α	V
		2494.4	51.09	-22.91	74	37.63	26.82	19.18	32.54	166	344	Р	V
		2483.6	41.88	-12.12	54	28.38	26.87	19.16	32.53	166	344	Α	V

TEL: 886-3-327-0868 Page Number: C1 of C14



BLE Margin Note Frequency Level Limit Read Antenna Path Preamp Ant Table Peak Pol. Line Level Factor Loss Factor Pos Pos Avg. (dB) (dBµV/m) (dB_µV) (dB) (MHz) (dBµV/m) (dB/m) (dB) (deg) (P/A) (H/V) (cm) * 2480 98.52 85.01 26.88 32.53 291 330 Н 19.16 * 2480 97.97 84.46 26.88 19.16 32.53 291 330 Н -Α Ρ 2484 52.27 -21.73 74 38.78 26.86 19.16 32.53 291 330 Н 2483.52 42.87 -11.13 54 29.37 26.87 19.16 32.53 291 330 Α Н Н BLE Н **CH 39** 2480 98.25 84.74 26.88 19.16 32.53 179 345 Р ٧ 2480MHz 2480 97.72 84.21 26.88 19.16 32.53 179 345 Α ٧ ٧ 2483.56 52.81 -21.19 74 39.31 26.87 19.16 32.53 179 345 ٧ 2483.52 42.96 -11.04 54 29.46 26.87 19.16 32.53 179 345 Α ٧ ٧ No other spurious found. Remark All results are PASS against Peak and Average limit line.

Report No.: FR322116

TEL: 886-3-327-0868 Page Number : C2 of C14

2.4GHz 2400~2483.5MHz

Report No. : FR322116

BLE (Harmonic @ 3m)

BLE	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
		(MHz)	(dBµV/m)	(dB)	Line (dBµV/m)	Level (dBµV)	Factor (dB/m)	Loss (dB)	Factor (dB)	Pos (cm)	Pos (deg)	Avg. (P/A)	
		4804	46.46	-27.54	74	32.93	32.61	14.51	33.59	-	-	Р	Н
													Н
													Н
													Н
													Н
													Н
													Н
													Н
													Н
													Н
													Н
BLE													Н
CH 00 2402MHz		4804	46.48	-27.52	74	32.95	32.61	14.51	33.59	-	-	Р	V
2402111172													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V

TEL: 886-3-327-0868 Page Number : C3 of C14



BLE Antenna Table Peak Pol. Note Frequency Level Margin Limit Read Path Preamp Ant Line Level **Factor** Loss Factor Pos Pos Avg. (dB_µV) (deg) (P/A) (H/V) (MHz) (dBµV/m) (dB) (dBµV/m) (dB/m) (dB) (dB) (cm) 4880 47.25 -26.75 74 33.6 32.76 14.46 33.57 Н 7320 50.6 -23.4 74 32.53 37.44 16.58 35.95 Α Н Ρ 7320 41.09 -12.91 54 23.02 37.44 16.58 35.95 Н Н Н Н Н Н Н Н Н BLE Н **CH 19** 4880 46.82 -27.18 74 33.17 32.76 14.46 33.57 Ρ V 2440MHz 7320 74 37.44 ٧ 50.85 -23.15 32.78 16.58 35.95 Α Ρ ٧ 7320 41.13 -12.87 54 23.06 37.44 16.58 35.95 ٧ ٧ ٧ ٧ ٧ ٧ ٧ ٧ ٧

Report No.: FR322116

TEL: 886-3-327-0868 Page Number : C4 of C14

BLE	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
		, .		, \	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBµV/m)	(dB)	(dBµV/m)	(dBµV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	
		4960	46.27	-27.73	74	32.65	32.78	14.4	33.56	-	-		Н
		7440	50.29	-23.71	74	32.33	37.12	16.88	36.04	-	-	Α	Н
		7440	40.8	-13.2	54	22.84	37.12	16.88	36.04	-	-	Р	Н
													Н
													Н
													Н
													Н
													Н
													Н
													Н
													Н
BLE													Н
CH 39 2480MHz		4960	46.49	-27.51	74	32.87	32.78	14.4	33.56	-	-	Р	V
240UNITZ		7440	50.05	-23.95	74	32.09	37.12	16.88	36.04	-	-	Α	V
		7440	40.33	-13.67	54	22.37	37.12	16.88	36.04	-	-	Р	V
													V
													V
													V
													V
													V
													V
													V
													V
													V
	1. No	o other spurious	s found.										<u> </u>
		I results are PA		Peak and	l Average lim	it line.							
Remark	3. Th	ne emission pos	sition marked	las "-" m	neans no susp	pected em	ission found	d with suf	ficient mar	gin agai	nst limit	line or	· noise
	flo	or only.											

Report No. : FR322116

TEL: 886-3-327-0868 Page Number : C5 of C14

<2Mbps>

2.4GHz 2400~2483.5MHz

Report No. : FR322116

BLE (Band Edge @ 3m)

BLE	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
		(54 11)	(15)(()	(ID)	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	(110.0
		(MHz)	(dBµV/m)		(dBµV/m)	(dBµV)	(dB/m)	(dB)	(dB)	(cm)		(P/A)	
		2350.11	51.1	-22.9	74	37.53	27.1	18.91	32.44	111	314	Р	Н
		2355.57	43.37	-10.63	54	29.79	27.1	18.92	32.44	111	314	Α	Н
	*	2402	96.45	-	-	82.82	27.1	19	32.47	111	314	Р	Н
	*	2402	95.13	-	-	81.5	27.1	19	32.47	111	314	Α	Н
BLE													Н
CH 00													Н
2402MHz		2362.395	51.11	-22.89	74	37.53	27.1	18.93	32.45	185	313	Р	V
		2383.5	43.25	-10.75	54	29.64	27.1	18.97	32.46	185	313	Α	V
	*	2402	98.56	-	-	84.93	27.1	19	32.47	185	313	Р	V
	*	2402	97.45	-	-	83.82	27.1	19	32.47	185	313	Α	V
													٧
													V
		2370.2	51.3	-22.7	74	37.71	27.1	18.94	32.45	133	309	Р	Н
		2366.84	43.37	-10.63	54	29.78	27.1	18.94	32.45	133	309	Α	Н
	*	2440	96.79	-	-	83.19	27.02	19.08	32.5	133	309	Р	Н
	*	2440	95.55	-	-	81.95	27.02	19.08	32.5	133	309	Α	Н
51.5		2499.86	50.54	-23.46	74	37.09	26.8	19.19	32.54	133	309	Р	Н
BLE CH 19		2492.58	42.97	-11.03	54	29.49	26.83	19.18	32.53	133	309	Α	Н
2440MHz		2321.9	51.42	-22.58	74	37.89	27.1	18.85	32.42	197	307	Р	V
277VIII IZ		2385.18	43.18	-10.82	54	29.57	27.1	18.97	32.46	197	307	Α	V
	*	2440	99.04	-	-	85.44	27.02	19.08	32.5	197	307	Р	V
	*	2440	97.86	-	-	84.26	27.02	19.08	32.5	197	307	Α	٧
		2490.41	51.04	-22.96	74	37.55	26.84	19.18	32.53	197	307	Р	٧
		2494.47	43.39	-10.61	54	29.93	26.82	19.18	32.54	197	307	Α	٧

TEL: 886-3-327-0868 Page Number : C6 of C14



BLE Margin Note Frequency Level Limit Read Antenna Path Preamp Ant Table Peak Pol. Line Level Factor Loss Factor Pos Pos Avg. (dB) (dBµV/m) (dB_µV) (dB) (MHz) (dBµV/m) (dB/m) (dB) (deg) (P/A) (H/V) (cm) * 2480 93.65 80.14 26.88 32.53 127 310 Н 19.16 * 2480 92.5 78.99 26.88 19.16 32.53 127 310 Н -Α Ρ 2483.88 51.3 -22.7 74 37.81 26.86 19.16 32.53 127 310 Н 2483.52 43.4 -10.6 54 29.9 26.87 19.16 32.53 127 310 Н Н BLE Н **CH 39** 2480 98.17 84.66 26.88 19.16 32.53 178 310 Р ٧ 2480MHz 2480 96.82 83.31 26.88 19.16 32.53 178 310 Α ٧ ٧ 2484.4 51.86 -22.14 74 38.37 26.86 19.16 32.53 178 310 ٧ 2483.68 44.45 -9.55 54 30.95 26.87 19.16 32.53 178 310 Α ٧ ٧ No other spurious found. Remark All results are PASS against Peak and Average limit line.

Report No.: FR322116

TEL: 886-3-327-0868 Page Number : C7 of C14

2.4GHz 2400~2483.5MHz

Report No. : FR322116

BLE (Harmonic @ 3m)

BLE	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
		/ 	(15)(()	(15)	Line	Level	Factor	Loss	Factor	Pos		Avg.	
		(MHz)	(dBµV/m)		(dBµV/m)		(dB/m)	(dB)	(dB)	(cm)	(deg)		
		4804	45.98	-28.02	74	32.45	32.61	14.51	33.59	-	-	Р	Н
													Н
													Н
													Н
													Н
													Н
													Н
													Н
													Н
													Н
													Н
BLE													
CH 00												_	Н
2402MHz		4804	47.1	-26.9	74	33.57	32.61	14.51	33.59	-	-	Р	V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V

TEL: 886-3-327-0868 Page Number : C8 of C14



BLE Antenna Table Peak Pol. Note Frequency Level Margin Limit Read Path Preamp Ant Line Level **Factor** Loss Factor Pos Pos Avg. (dBµV/m) (deg) (P/A) (H/V) (MHz) (dB) (dBµV/m) (dBµV) (dB/m) (dB) (dB) (cm) 4880 47.46 -26.54 74 33.81 32.76 14.46 33.57 Н 7320 50.82 -23.18 74 32.75 37.44 16.58 35.95 Α Н Ρ 7320 41.7 -12.3 54 23.63 37.44 16.58 35.95 Н Н Н Н Н Н Н Н Н BLE Н **CH 19** 4880 46.85 -27.15 74 33.2 32.76 14.46 33.57 Ρ V 2440MHz ٧ 7320 -22.73 74 33.2 37.44 51.27 16.58 35.95 Α Ρ ٧ 7320 42.15 -11.85 54 24.08 37.44 16.58 35.95 ٧ ٧ ٧ ٧ ٧ ٧ ٧ ٧ ٧

Report No.: FR322116

TEL: 886-3-327-0868 Page Number : C9 of C14

BLE	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
		(MHz)	(dBµV/m)	(dB)	Line (dBµV/m)	Level (dBµV)	Factor (dB/m)	Loss (dB)	Factor (dB)	Pos (cm)	Pos (deg)	Avg.	(H/V)
		4960	45.96	-28.04	74	32.34	32.78	14.4	33.56	-	-	P	H
		7440	50.75	-23.25	74	32.79	37.12	16.88	36.04	-	-	Α	Н
		7440	40.27	-13.73	54	22.31	37.12	16.88	36.04	-	-	Р	Н
													Н
													Н
													Н
													Н
													Н
													Н
													Н
BLE													Н
CH 39													Н
2480MHz		4960	46.89	-27.11	74	33.27	32.78	14.4	33.56	-	-	Р	V
		7440	50.58	-23.42	74	32.62	37.12	16.88	36.04	-	-	Α	V
		7440	40.36	-13.64	54	22.4	37.12	16.88	36.04	-	-	Р	V
													V
													V
													V
													V
													V
													V
													V
													V
	1. No	o other spurious	s found.	1								<u> </u>	
		results are PA		Peak and	Average lim	it line.							
Remark	3. Th	e emission pos	ition marked	l as "-" m	eans no susp	pected em	ssion found	d with suff	ficient mar	gin agai	nst limit	line or	noise
	flo	or only.											

Report No. : FR322116

TEL: 886-3-327-0868 Page Number : C10 of C14

Emission above 18GHz

Report No.: FR322116

2.4GHz BLE (SHF)

BLE	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
					Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBµV/m)	(dB)	($dB\mu V/m$)	(dBµV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V
		24908	46.3	-27.7	74	44.05	39.15	22.77	59.67	-	-	Р	Н
													Н
													Н
													Н
													Н
													Н
													Н
													Н
													Н
													Н
													Н
2.4GHz													Н
BLE		24798	44.4	-29.6	74	42.71	38.98	22.57	59.86	_	_	Р	V
SHF													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V

Remark

- 3. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.

: C11 of C14 TEL: 886-3-327-0868 Page Number

Emission below 1GHz

Report No.: FR322116

2.4GHz BLE (LF)

BLE	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
					Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBµV/m)	(dB)	(dBµV/m)	(dBµV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
		30.97	22.93	-17.07	40	30.04	24.62	1.04	32.77	-	-	Р	Н
		133.79	22.68	-20.82	43.5	35.31	17.58	2.49	32.7	-	-	Р	Н
		180.35	19.99	-23.51	43.5	34.95	14.83	2.92	32.71	-	-	Р	Н
		212.36	22.59	-20.91	43.5	37.34	14.91	3.06	32.72	-	-	Р	Н
		326.82	24.57	-21.43	46	34.1	19.57	3.68	32.78	-	-	Р	Н
		959.26	37.91	-8.09	46	31.9	31.29	6.15	31.43	-	-	Р	Н
													Н
													Н
													Н
													Н
													Н
2.4GHz													Н
BLE LF		30	23.42	-16.58	40	29.96	25.2	1.03	32.77	-	-	Р	V
LF		61.04	19.16	-20.84	40	38.41	11.7	1.79	32.74	-	-	Р	V
		175.5	19.81	-23.69	43.5	34.49	15.15	2.88	32.71	-	-	Р	V
		377.26	25.13	-20.87	46	33.18	20.85	3.91	32.81	-	-	Р	V
		559.62	29.56	-16.44	46	31.54	26.18	4.78	32.94	-	-	Р	V
		959.26	39.86	-6.14	46	33.85	31.29	6.15	31.43	-	-	Р	V
													V
													V
													V
													V
													V
													V

1. No other spurious found.

Domark

2. All results are PASS against limit line.

3. The emission position marked as "-" means no suspected emission found and emission level has at least 6dB margin against limit or emission is noise floor only.

TEL: 886-3-327-0868 Page Number: C12 of C14

Note symbol

Report No. : FR322116

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not
	exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical

TEL: 886-3-327-0868 Page Number : C13 of C14

A calculation example for radiated spurious emission is shown as below:

Report No.: FR322116

BLE	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
					Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBµV/m)	(dB)	(dBµV/m)	(dBµV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BLE		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	Р	Н
CH 00													
2402MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	Α	Н

- 1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
- 2. Level($dB\mu V/m$) =

Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBµV) - Preamp Factor(dB)

3. Margin(dB) = Level(dB μ V/m) – Limit Line(dB μ V/m)

For Peak Limit @ 2390MHz:

- 1. Level(dBµV/m)
- = Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBµV) Preamp Factor(dB)
- $= 32.22(dB/m) + 4.58(dB) + 54.51(dB\mu V) 35.86 (dB)$
- $= 55.45 (dB\mu V/m)$
- 2. Margin(dB)
- = Level(dBµV/m) Limit Line(dBµV/m)
- $= 55.45(dB\mu V/m) 74(dB\mu V/m)$
- = -18.55(dB)

For Average Limit @ 2390MHz:

- 1. Level(dBµV/m)
- = Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) Preamp Factor(dB)
- $= 32.22(dB/m) + 4.58(dB) + 42.6(dB\mu V) 35.86 (dB)$
- $= 43.54 (dB\mu V/m)$
- 2. Margin(dB)
- = Level($dB\mu V/m$) Limit Line($dB\mu V/m$)
- $= 43.54(dB\mu V/m) 54(dB\mu V/m)$
- = -10.46(dB)

Both peak and average measured complies with the limit line, so test result is "PASS".

TEL: 886-3-327-0868 Page Number : C14 of C14

Appendix D. Radiated Spurious Emission Plots

Toot Engineer		Temperature :	22.1~23.1°C
Test Engineer :	Leo Li	Relative Humidity :	55~60%

Report No.: FR322116

Note symbol

-L	Low channel location
-R	High channel location


TEL: 886-3-327-0868 Page Number : D1 of D31

<1Mbps>

2.4GHz 2400~2483.5MHz

Report No.: FR322116

BLE (Band Edge @ 3m)

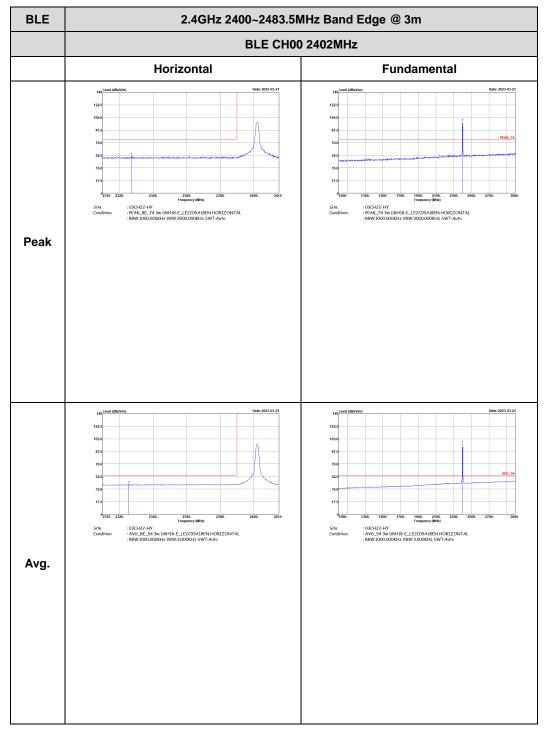


TEL: 886-3-327-0868 Page Number : D2 of D31

BLE 2.4GHz 2400~2483.5MHz Band Edge @ 3m BLE CH00 2402MHz Vertical **Fundamental** : 03CH22-HY : PEAK_BE_74 3m DRH18-E_LE2C05A18EN VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto : 03CH22-HY : PEAK_74 3m DRH18-E_LE2C05A18EN VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Peak : 03CH22-HY : AV6_BE_54 3m DRH18-E_LE2C05A18EN VERTICAL : R8W:1000.000KHz VBW:3.000KHz SWT:Auto : 03CH22-HY : AVG_54 3m DRH18-E_LE2C05A18EN VERTICAL : R8W:1000.000KHz VBW:3.000KHz SWT:Auto Avg

Report No.: FR322116

TEL: 886-3-327-0868 Page Number : D3 of D31

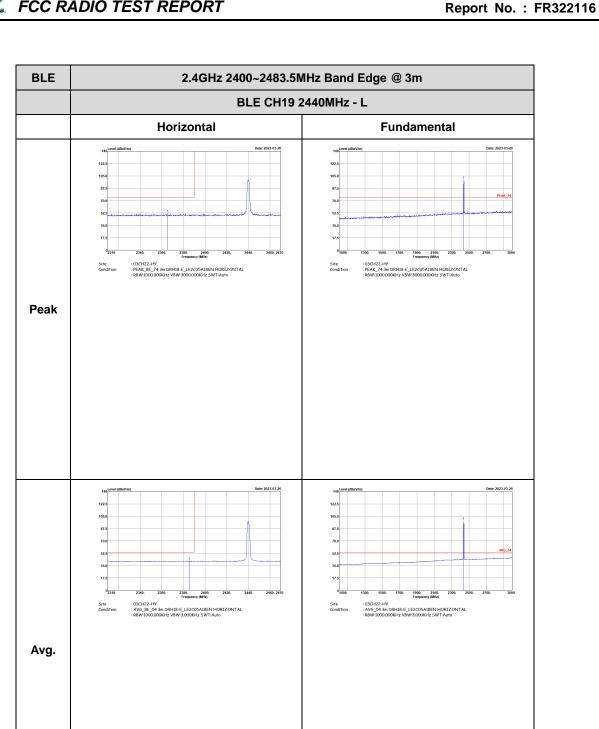

TEL: 886-3-327-0868 Page Number : D4 of D31

BLE 2.4GHz 2400~2483.5MHz Band Edge @ 3m BLE CH19 2440MHz - R Horizontal **Fundamental** : 03CH22-HY : PEAK_BE_74 3m DRH18-E_LE2C05A18EN HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Peak Left blank : 03CH22-HY : AV6_BE_54 3m DRH18-E_LE2C05A18EN HORIZONTAL : R8W:1000.000KHz VBW:3.000KHz SWT:Auto Left blank Avg.

Report No.: FR322116

TEL: 886-3-327-0868 Page Number : D5 of D31

BLE 2.4GHz 2400~2483.5MHz Band Edge @ 3m BLE CH19 2440MHz - L Vertical **Fundamental** : 03CH22-HY : PEAK_BE_74 3m DRH18-E_LE2C05A18EN VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto : 03CH22-HY : PEAK_74 3m DRH18-E_LE2C05A18EN VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Peak : 03CH22-HY : AV6_BE_54 3m DRH18-E_LE2C05A18EN VERTICAL : R8W:1000.000KHz VBW:3.000KHz SWT:Auto : 03CH22-HY : AVG_54 3m DRH18-E_LE2C05A18EN VERTICAL : R8W:1000.000KHz VBW:3.000KHz SWT:Auto Avg.

Report No.: FR322116

TEL: 886-3-327-0868 Page Number : D6 of D31

BLE 2.4GHz 2400~2483.5MHz Band Edge @ 3m BLE CH19 2440MHz - R Vertical **Fundamental** : 03CH22-HY : PEAK_BE_74 3m DRH18-E_LE2C05A18EN VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Peak Left blank : 03CH22-HY : AV6_BE_54 3m DRH18-E_LE2C05A18EN VERTICAL : R8W:1000.000KHz VBW:3.000KHz SWT:Auto Left blank Avg.

Report No.: FR322116

TEL: 886-3-327-0868 Page Number : D7 of D31

BLE 2.4GHz 2400~2483.5MHz Band Edge @ 3m **BLE CH39 2480MHz** Horizontal **Fundamental** : 03CH22-HY : PEAK_BE_74 3m DRH18-E_LE2C05A18EN HORIZONTAL : RBW:1000,000KHz VBW:3000,000KHz SWT:Auto : 03CH22-HY : PEAK_74 3m DRH18-E_LE2C05A18EN HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Peak : 03CH22-HY : AVG_54 3m DRH18-E_LE2C05A18EN HORIZONTAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto : 03CH22-HY : AVG_BE_54 3m DRH18-E_LE2C05A18EN HORIZONTAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto Avg.

Report No.: FR322116

TEL: 886-3-327-0868 Page Number : D8 of D31


BLE 2.4GHz 2400~2483.5MHz Band Edge @ 3m **BLE CH39 2480MHz** Vertical **Fundamental** : 03CH22-HY : PEAK_BE_74 3m DRH18-E_LE2C05A18EN VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto : 03CH22-HY : PEAK_74 3m DRH18-E_LE2C05A18EN VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Peak : 03CH22-HY : AV6_54 3m DRH18-E_LE2C05A18EN VERTICAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto : 03CH22-HV : AVG_BE_54 3m DRH18-E_LE2C05A18EN VERTICAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto Avg.

Report No.: FR322116

TEL: 886-3-327-0868 Page Number : D9 of D31


2.4GHz 2400~2483.5MHz BLE (Harmonic @ 3m)

Report No.: FR322116

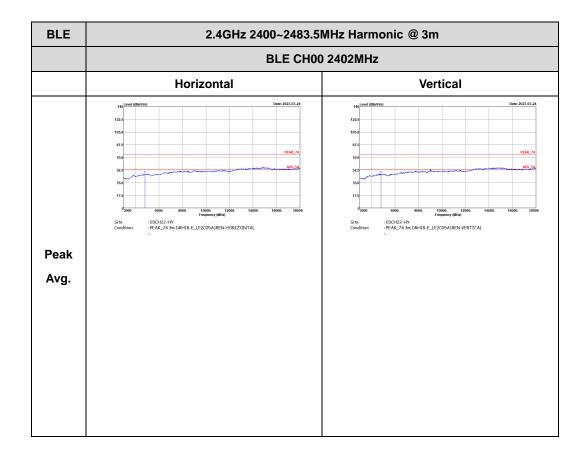

TEL: 886-3-327-0868 Page Number : D10 of D31

CC RADIO TEST REPORT Report No. : FR322116

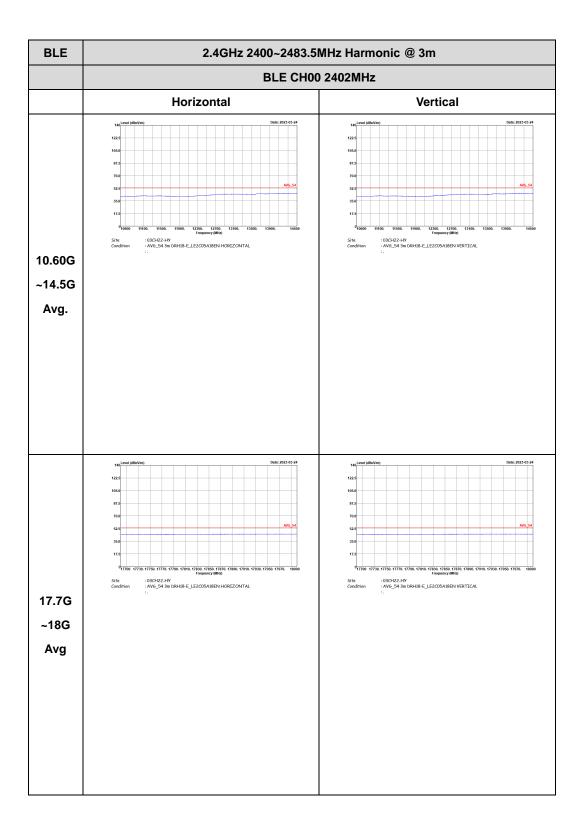

TEL: 886-3-327-0868 Page Number : D11 of D31

BLE CH19 2440MHz

Horizontal

Vertical

Vertical

Fig. (1) GUG22-W Condition | FER. ZA is in Delite E_LEZOSAIBN VERTICAL

Peak

Avg.


Report No.: FR322116

TEL: 886-3-327-0868 Page Number : D12 of D31

BLE 2.4GHz 2400~2483.5MHz Harmonic @ 3m **BLE CH19 2440MHz** Horizontal Vertical : 03CH22-HV : AV6_54 3m DRH18-E_LE2C05A18EN HORIZONTAL : 03CH22-HV : AV6_54 3m DRH18-E_LE2C05A18EN VERTICAL 10.60G ~14.5G Avg. 0 17700 17730, 17750, 17770, 17790, 17810, 17830, 17850, 17870, 17890, 17910, 17930, 17950, 17970, Frequency (MHz) : 03CH22-HY : AV6_54 3m DRH18-E_LE2C05A18EN HORIZONTAL : 03CH22-HY : AV6_54 3m DRH18-E_LE2C05A18EN VERTICAL 17.7G ~18G Avg

Report No.: FR322116

TEL: 886-3-327-0868 Page Number : D13 of D31

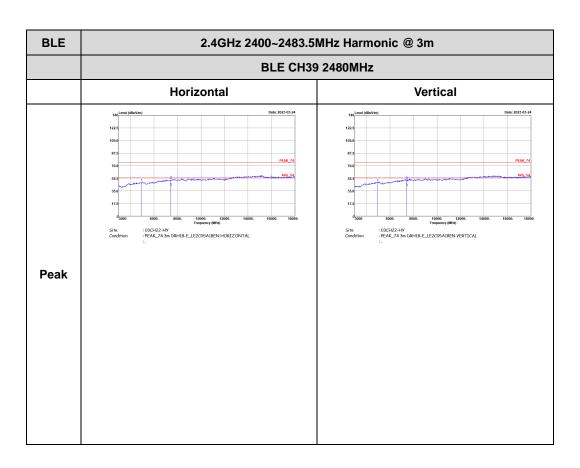

Report No.: FR322116

TEL: 886-3-327-0868 Page Number : D14 of D31

BLE 2.4GHz 2400~2483.5MHz Harmonic @ 3m **BLE CH39 2480MHz** Horizontal Vertical : 03CH22-HV : AV6_54 3m DRH18-E_LE2C05A18EN HORIZONTAL : 03CH22-HV : AV6_54 3m DRH18-E_LE2C05A18EN VERTICAL 10.60G ~14.5G Avg. 0 17700 17730, 17750, 17770, 17790, 17810, 17830, 17850, 17870, 17890, 17910, 17930, 17950, 17970, Frequency (MHz) : 03CH22-HY : AV6_54 3m DRH18-E_LE2C05A18EN HORIZONTAL : 03CH22-HY : AV6_54 3m DRH18-E_LE2C05A18EN VERTICAL 17.7G ~18G Avg

Report No.: FR322116


TEL: 886-3-327-0868 Page Number : D15 of D31

<2Mbps>

2.4GHz 2400~2483.5MHz

Report No.: FR322116

BLE (Band Edge @ 3m)

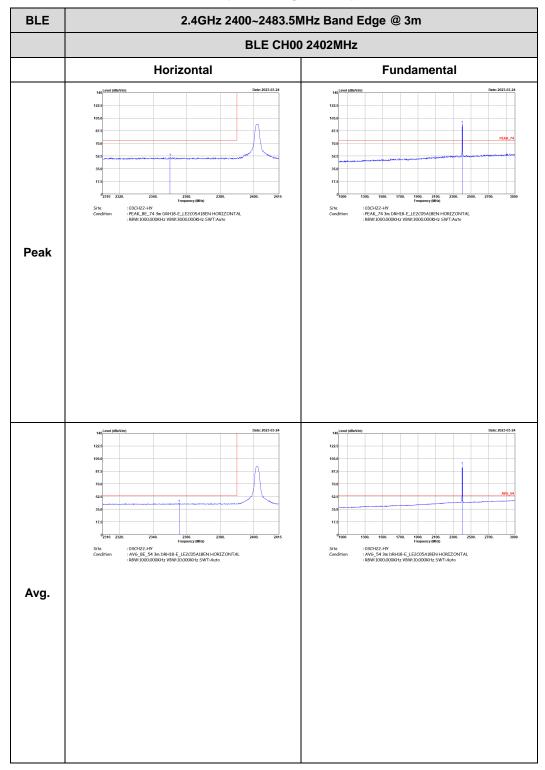


TEL: 886-3-327-0868 Page Number : D16 of D31

BLE 2.4GHz 2400~2483.5MHz Band Edge @ 3m BLE CH00 2402MHz Vertical **Fundamental** : 03CH22-HY : PEAK_74 3m DRH18-E_LE2C05A18EN VERTICAL : R8W:1000.000KHz VBW:3000.000KHz SWT:Auto : 03CH22-HY : PEAK_BE_74 3m DRH18-E_LE2C05A18EN VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Peak : 03CH22-HY : AV6_BE_54 3m DRH18-E_LE2C05A18EN VERTICAL : R8W:1000.000KHz VBW:10.000KHz 5WT:Auto : 03CH22-HY : AV6_54 3m DRH18-E_LE2C05A18EN VERTICAL : R8W:1000.000KHz VBW:10.000KHz SWT:Auto Avg

Report No.: FR322116

TEL: 886-3-327-0868 Page Number : D17 of D31

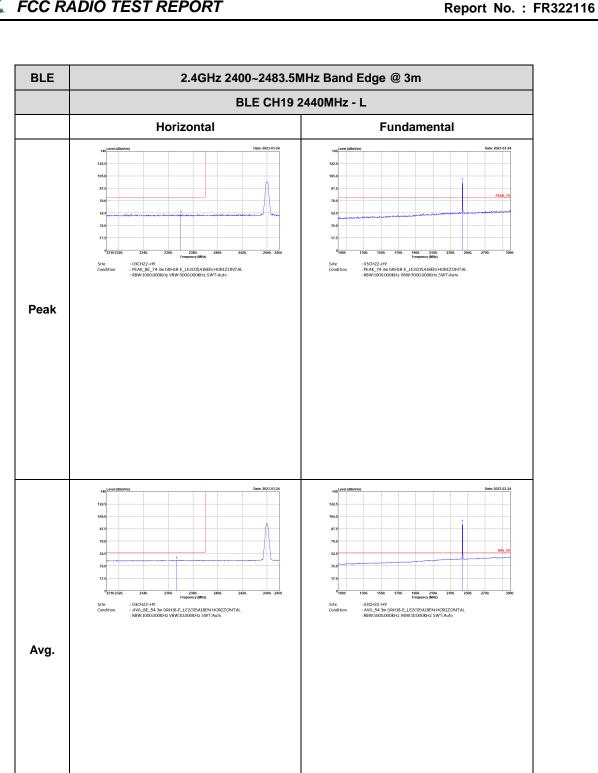

TEL: 886-3-327-0868 Page Number : D18 of D31

BLE 2.4GHz 2400~2483.5MHz Band Edge @ 3m BLE CH19 2440MHz - R Horizontal **Fundamental** Date: 2023-03-24 : 03CH22-HY : PEAK_BE_74 3m DRH18-E_LE2C05A18EN HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz 5WT:Auto Peak Left blank : 03CH22-HY : AVG_BE_54 3m DRH18-E_LE2C05A18EN HORIZONTAL : RBW:1000.000KHz VBW:10.000KHz SWT:Auto Left blank Avg.

Report No.: FR322116

TEL: 886-3-327-0868 Page Number : D19 of D31

BLE 2.4GHz 2400~2483.5MHz Band Edge @ 3m BLE CH19 2440MHz - L Vertical **Fundamental** : 03CH22-HY : PEAK_BE_74 3m DRH18-E_LE2C05A18EN VERTICAL : R8W:1000.000KHz VBW:3000.000KHz SWT:Auto : 03CH22-HY : PEAK_74 3m DRH18-E_LE2C05A18EN VERTICAL : R8W:1000.000KHz VBW:3000.000KHz SWT:Auto Peak : 03CH22-HY : AV6_BE_54 3m DRH18-E_LE2C05A18EN VERTICAL : R8W:1000.000KHz VBW:10.000KHz SWT:Auto : 03CH22-HY : AV6_54 3m DRH18-E_LE2C05A18EN VERTICAL : R8W:1000.000KHz VBW:10.000KHz SWT:Auto Avg.

Report No.: FR322116

TEL: 886-3-327-0868 Page Number : D20 of D31

BLE 2.4GHz 2400~2483.5MHz Band Edge @ 3m BLE CH19 2440MHz - R Vertical **Fundamental** : 03CH22-HY : PEAK_BE_74 3m DRH18-E_LE2C05A18EN VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Peak Left blank : 03CH22-HY : AVG_BE_54 3m DRH18-E_LE2C05A18EN VERTICAL : R8W:1000.000KHz VBW:10.000KHz SWT:Auto Left blank Avg.

Report No.: FR322116

TEL: 886-3-327-0868 Page Number : D21 of D31

BLE 2.4GHz 2400~2483.5MHz Band Edge @ 3m **BLE CH39 2480MHz** Horizontal **Fundamental** : 03CH22-HY : PEAK_BE_74 3m DRH18-E_LE2C05A18EN HORIZONTAL : RBW:1000,000KHz VBW:3000,000KHz SWT:Auto : 03CH22-HY : PEAK_74 3m DRH18-E_LE2C05A18EN HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Peak : 03CH22-HY : AVG_BE_54 3m DRH18-E_LE2C05A18EN HORIZONTAL : RBW:1000.000KHz VBW:10.000KHz SWT:Auto : 03CH22-HY : AV6_54 3m DRH18-E_LE2C05A18EN HORIZONTAL : RBW:1000.000KHz VBW:10.000KHz SWT:Auto Avg.

Report No.: FR322116

TEL: 886-3-327-0868 Page Number : D22 of D31


BLE 2.4GHz 2400~2483.5MHz Band Edge @ 3m **BLE CH39 2480MHz** Vertical **Fundamental** : 03CH22-HY : PEAK_74 3m DRH18-E_LE2C05A18EN VERTICAL : R8W:1000.000KHz VBW:3000.000KHz SWT:Auto : 03CH22-HY : PEAK_BE_74 3m DRH18-E_LE2C05A18EN VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Peak : 03CH22-HY : AV6_54 3m DRH18-E_LE2C05A18EN VERTICAL : R8W:1000.000KHz VBW:10.000KHz SWT:Auto : 03CH22-HV : AV6_BE_54 3m DRH18-E_LE2C05A18EN VERTICAL : RBW:1000.000KHz VBW:10.000KHz SWT:Auto Avg.

Report No.: FR322116

TEL: 886-3-327-0868 Page Number : D23 of D31

2.4GHz 2400~2483.5MHz BLE (Harmonic @ 3m)

Report No.: FR322116

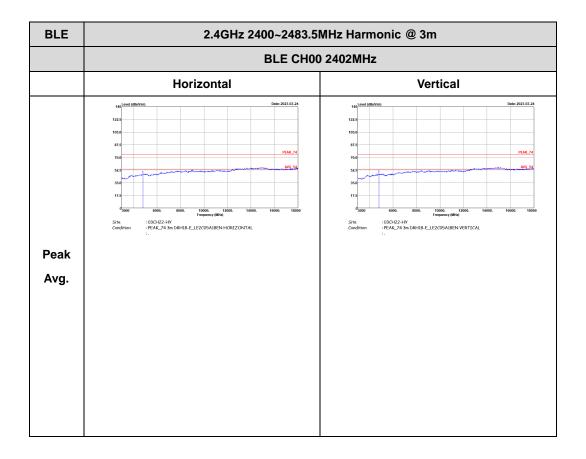

TEL: 886-3-327-0868 Page Number : D24 of D31


BLE 2.4GHz 2400~2483.5MHz Harmonic @ 3m BLE CH00 2402MHz Horizontal Vertical : 03CH22-HV : AV6_54 3m DRH18-E_LE2C05A18EN HORIZONTAL : 03CH22-HV : AV6_54 3m DRH18-E_LE2C05A18EN VERTICAL 10.60G ~14.5G Avg. : 03CH22-HY : AVG_54 3m DRH18-E_LE2C05A18EN HORIZONTAL : 03CH22-HY : AV6_54 3m DRH18-E_LE2C05A18EN VERTICAL 17.7G

Report No.: FR322116

TEL: 886-3-327-0868 Page Number : D25 of D31

FAX: 886-3-327-0855

~18G Avg

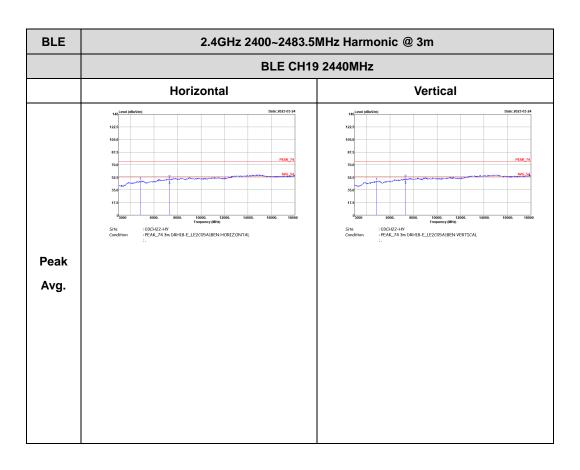


Report No.: FR322116

TEL: 886-3-327-0868 Page Number : D26 of D31

BLE 2.4GHz 2400~2483.5MHz Harmonic @ 3m **BLE CH19 2440MHz** Horizontal Vertical : 03CH22-HV : AV6_54 3m DRH18-E_LE2C05A18EN HORIZONTAL : 03CH22-HV : AV6_54 3m DRH18-E_LE2C05A18EN VERTICAL 10.60G ~14.5G Avg. : 03CH22-HY : AVG_54 3m DRH18-E_LE2C05A18EN HORIZONTAL : 03CH22-HY : AV6_54 3m DRH18-E_LE2C05A18EN VERTICAL 17.7G ~18G Avg

Report No.: FR322116


TEL: 886-3-327-0868 Page Number : D27 of D31

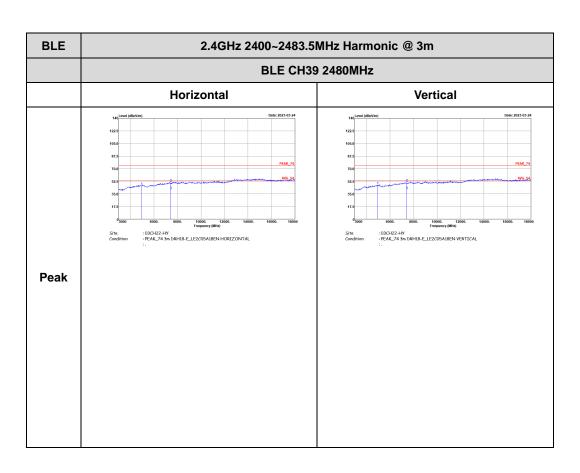

Report No.: FR322116

TEL: 886-3-327-0868 Page Number : D28 of D31


FAX: 886-3-327-0855

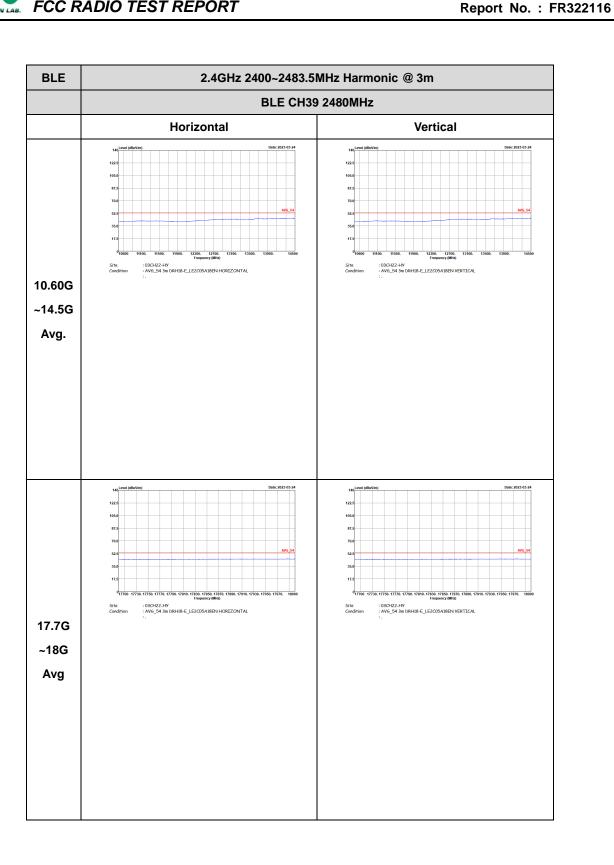

TEL: 886-3-327-0868 Page Number : D29 of D31

Emission above 18GHz 2.4GHz BLE (SHF @ 1m)


Report No.: FR322116

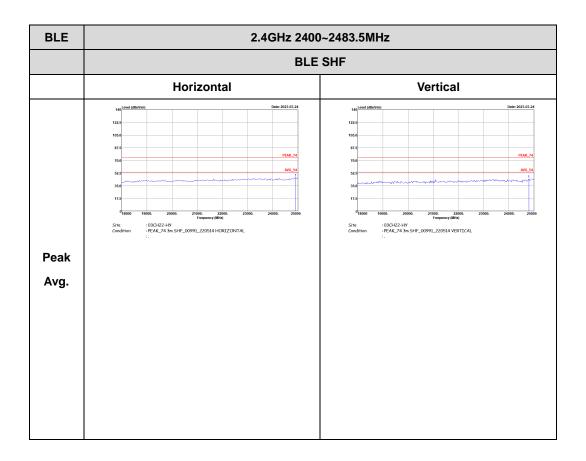

TEL: 886-3-327-0868 Page Number : D30 of D31

Emission below 1GHz 2.4GHz BLE (LF)

Report No.: FR322116

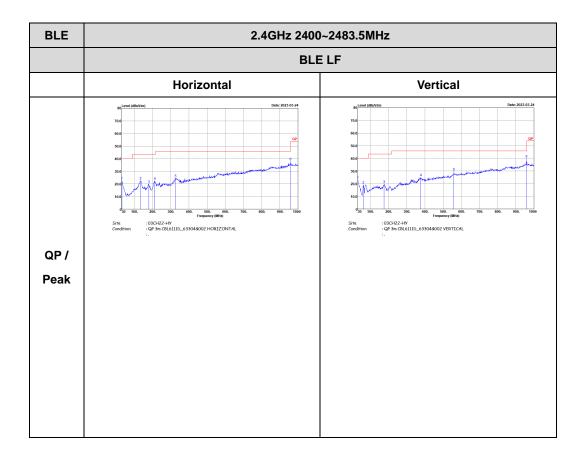


TEL: 886-3-327-0868 Page Number : D31 of D31

Appendix E. Duty Cycle Plots

Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
Bluetooth - LE for 1Mbps	60.53	378.3	2.64	3kHz
Bluetooth - LE for 2Mbps	31.48	198.4	5.04	10kHz

Report No.: FR322116

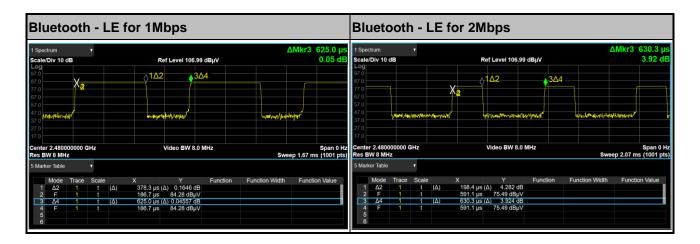

_____THE END_____

TEL: 886-3-327-0868 Page Number : E1 of E1