Appendix E. Power reduction mechanism verification

According to the May 2017 TCBC Workshop, Demonstration of proper functioning of the detection and triggering mechanisms to support the corresponding RF exposure conditions. The verification is through a base station simulator is used to establish a conducted RF connection and monitor output power under different operating conditions related to the power reduction mechanisms. Detail of power reduction mechanisms referring to Operational Description

Report No.: FA380307B

1. Power verification procedure

- Establish voice call and audio routed through the earpiece to monitor output power under head with simultaneous transmitting power states.
 - > Tradition voice call for voice over IP CMRS operations for /5G FR1
 - > 5G FR1 is set at highest BW MHz, 1RF, RB offset = 1
- Establish data connection monitor hotspot power state.
 - 5G FR1 is set at highest BW MHz, 1RF, RB offset = 1
- Establish data connection monitor body worn power state.
 - > 5G FR1 is set at highest BW MHz, 1RF, RB offset = 1
 - > Body Detect mechanism was performed for the in-hand and on a stationary object (placed on a table)
- This device incorporates the Samsung S.LSI TAS algorithm feature and through under varying Tx power transmission scenarios in real-time to maintain the time-averaged Tx power compliant with FCC RF exposure requirement.
- In this power validation purpose is to demonstrate of proper functioning of the detection and triggering
 mechanisms to support the corresponding RF exposure conditions. In order to avoid real-time TX power varying
 may affect monitor output power related to the power reduction mechanisms, therefore power reduction
 verification would be disabled WWAN TAS feature.
- Verification performed for each technology to demonstrate that the power reduction applies for both technology and call origination.


TEL: 886-3-327-3456 Page: E1 of E5

FAX: 886-3-328-4978 Template version: 211220

Page: E2 of E5



2. Test setup for measuring power

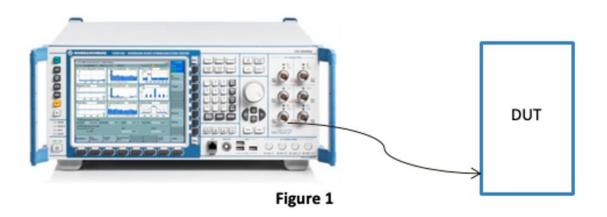

TEL: 886-3-327-3456 FAX: 886-3-328-4978

Template version: 211220

SAR TEST REPORT Report No. :FA380307B

3. Verification output Power Results

Head exposure conditions

Head Exposure condition		Output Power for Voice Call					
Ear acoustic output Status:		C	N	ON			
WiFi Status:		0	FF	ON			
Power state		WWAN	Index 2	WWAN Index 3			
Wireless technology	Antenna	Measured (dBm)	Max. Tune-up (dBm)	Measured (dBm)	Max. Tune-up (dBm)		
NR SA n12	Ant 0	24.74	25.7	24.74	25.7		
	Ant 1	22.81	23.4	20.72	21.3		
NR SA n25	Ant 2	24.79	25.7	24.24	25.1		
	Ant 0	24.20	25.2	23.63	24.5		

Head Exposure o	ondition	Output Power for Voice Call					
Ear acoustic outpu	t Status:	ON		ON			
WWAN State	ıs:	OFF	:	ON			
Power state	е	WIFI Inc	lex 1	WIFI Index 3			
Wireless technology	Antenna	Measured (dBm)	Max. Tune-up (dBm)	Measured (dBm)	Max. Tune-up (dBm)		
WiFi 802.11g	(Ant4+3)Ant 4	11.33	12.5	9.49	10.0		
CH6	(Ant4+3)Ant 3	12.41	12.5	9.95	10.0		
WiFi 802.11a 6Mbps	(Ant4+3)Ant 4	15.47	18.0	8.28	11.0		
CH157	(Ant4+3)Ant 3	16.37	18.0	9.32	11.0		

TEL: 886-3-327-3456 Page: E3 of E5

FAX: 886-3-328-4978 Template version: 211220



SPORTON LAB. FCC SAR TEST REPORT

Report No.:FA380307B

Page: E4 of E5

Hotspot exposur	Output Power for data connection					
Wifi Hotspot	(NC	OFF			
BT Hotspot	C	OFF	ON			
Power st		N Index 4 Index 7	WWAN Index 4 WIFI Index 7			
Wireless	Antonno	Measured	Max. Tune-up	Measured	Max. Tune-up	
Technology	- Antenna	(dBm)	(dBm)	(dBm)	(dBm)	
NR SA n12	Ant 0	24.84	25.7	24.84	25.7	
NR SAIIIZ	Ant 1	24.88	25.3	24.88	25.3	
NR SA n25	Ant 2	19.90	20.2	19.91	20.2	
INK SATI25	Ant 0	23.47	24.0	23.45	24.0	
WiFi 802.11g CH6	(Ant4+3)Ant 3	15.98	16.5			
VIII 1 002. TTG CF10	(Ant4+3)Ant 4	16.31	16.5			
WiFi 802.11a	(Ant4+3)Ant 3	17.23	20.0			
UNII ,CH157	(Ant4+3)Ant 4	16.21	20.0			

TEL: 886-3-327-3456 FAX: 886-3-328-4978 Template version: 211220 wern evneeure condition

Body worn exposure condition

Body Worn exposure condition		Output Power (data connection)						
		Stationary		Body Worn (In hand)				
WIFI/BT Status		OFF		OFF		ON		
Power state		WWAN Index 1		WWAN Index 5		WWAN Index 6		
Wireless Technology	Antenna	Measured (dBm)	Max. Tune- up (dBm)	Measured (dBm)	Max. Tune- up (dBm)	Measured (dBm)	Max. Tune- up (dBm)	
NR SA n12	Ant 0	24.84	25.7	24.84	25.7	24.84	25.7	
	Ant 1	24.88	25.3	24.88	25.3	24.88	25.3	
NR SA n25	Ant 2	25.41	25.7	20.72	21.0	19.89	20.2	
	Ant 0	24.55	25.2	24.55	25.2	23.86	24.4	

Report No.:FA380307B

Body Worn exposure condition		Output Power (data connection)						
		Stationary		In hand				
WWAN Status:		OFF		OFF		ON		
Power state		WIFI Index 0		WIFI Index 5		WIFI Index 7		
Wireless technology	Antenna	Measured	Max. Tune-	Measured	Max. Tune-	Measured	Max. Tune-	
		(dBm)	up (dBm)	(dBm)	up (dBm)	(dBm)	up (dBm)	
WiFi 802.11g CH6	(Ant4+3)Ant 4	18.13	21.0	17.91	19.5	15.31	16.5	
	(Ant4+3)Ant 3	19.22	21.0	19.27	19.5	16.42	16.5	
WiFi 802.11a UNII ,CH15	(Ant4+3)Ant 4	17.2	20.0	17.2	20.0	17.2	20.0	
	(Ant4+3)Ant 3	17.20	20.0	17.21	20.0	17.39	20.0	

TEL: 886-3-327-3456 Page: E5 of E5

FAX: 886-3-328-4978 Template version: 211220