



FCC RADIO TEST REPORT

FCC ID : A4RG8HHN
Equipment : Phone
Model Name : G8HHN
Applicant : Google LLC
1600 Amphitheatre Parkway,
Mountain View, California, 94043 USA
Standard : FCC Part 15 Subpart C §15.247

The product was received on Jul. 12, 2023 and testing was performed from Jul. 13, 2023 to Nov. 03, 2023. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.

Approved by: Louis Wu

Sporton International Inc. Wensan Laboratory

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)



Table of Contents

| | |
|--|-----------|
| History of this test report..... | 3 |
| Summary of Test Result..... | 4 |
| 1 General Description..... | 5 |
| 1.1 Product Feature of Equipment Under Test..... | 5 |
| 1.2 Modification of EUT | 6 |
| 1.3 Testing Location | 6 |
| 1.4 Applicable Standards..... | 6 |
| 2 Test Configuration of Equipment Under Test | 7 |
| 2.1 Carrier Frequency Channel | 7 |
| 2.2 Test Mode..... | 9 |
| 2.3 Connection Diagram of Test System..... | 12 |
| 2.4 Support Unit used in test configuration and system | 13 |
| 2.5 EUT Operation Test Setup | 13 |
| 2.6 Measurement Results Explanation Example..... | 13 |
| 3 Test Result..... | 14 |
| 3.1 6dB and 99% Bandwidth Measurement | 14 |
| 3.2 Output Power Measurement..... | 15 |
| 3.3 Power Spectral Density Measurement | 16 |
| 3.4 Conducted Band Edges and Spurious Emission Measurement | 17 |
| 3.5 Radiated Band Edges and Spurious Emission Measurement | 18 |
| 3.6 AC Conducted Emission Measurement..... | 22 |
| 3.7 Antenna Requirements | 24 |
| 4 List of Measuring Equipment | 25 |
| 5 Measurement Uncertainty | 27 |
| Appendix A. Conducted Test Results | |
| Appendix B. AC Conducted Emission Test Result | |
| Appendix C. Radiated Spurious Emission | |
| Appendix D. Radiated Spurious Emission Plots | |
| Appendix E. Duty Cycle Plots | |
| Appendix F. Setup Photographs | |



Summary of Test Result

| Report Clause | Ref Std. Clause | Test Items | Result (PASS/FAIL) | Remark |
|---------------|------------------------------|--|--------------------|--|
| 3.1 | 15.247(a)(2) | 6dB Bandwidth | Pass | - |
| 3.1 | 2.1049 | 99% Occupied Bandwidth | Reporting only | - |
| 3.2 | 15.247(b)(3) 15.247(b)(4) | Output Power | Pass | - |
| 3.3 | 15.247(e) | Power Spectral Density | Pass | - |
| 3.4 | 15.247(d) | Conducted Band Edges and Spurious Emission | Pass | - |
| 3.5 | 15.247(d) | Radiated Band Edges and Spurious Emission | Pass | 1.59 dB under the limit at 2483.52 MHz |
| 3.6 | 15.207 | AC Conducted Emission | Pass | 18.11 dB under the limit at 0.43 MHz |
| 3.7 | 15.203 | Antenna Requirement | Pass | - |

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: William Chen
Report Producer: Rebecca Wu



1 General Description

1.1 Product Feature of Equipment Under Test

| Product Feature |
|--|
| General Specs GSM/WCDMA/LTE/5G NR, Bluetooth, BLE, BLE channel sounding, Wi-Fi 2.4GHz 802.11b/g/n/ac/ax, Wi-Fi 5GHz 802.11a/n/ac/ax, Wi-Fi 6GHz 802.11a/ax, NFC, WPC Rx and GNSS Rx. |
| Antenna Type Bluetooth: <Ant.3>: IFA Antenna <Ant.4>: ILA Antenna |

| EUT Information List | |
|----------------------|----------------------------|
| S/N | Performed Test Item |
| 38011JEKB00248 | RF Conducted Measurement |
| 36161JEKB08227 | Radiated Spurious Emission |
| 38031JEKB01575 | Conducted Emission |

| Antenna information | | |
|-----------------------|-----------------|----------------------------|
| 2400 MHz ~ 2483.5 MHz | Peak Gain (dBi) | Ant.3: -1.2 Ant.4: -1.2 |

Remark: The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.



1.2 Modification of EUT

No modifications made to the EUT during the testing.

1.3 Testing Location

| | |
|---------------------------|--|
| Test Site | Sporton International Inc. Wensan Laboratory |
| Test Site Location | No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855 |
| Test Site No. | Sporton Site No. TH05-HY, CO07-HY, 03CH22-HY |

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW3786

1.4 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 15.247 Meas Guidance v05r02
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01
- ♦ ANSI C63.10-2013

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.



2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

<Bluetooth - LE>

| Frequency Band | Channel | Freq. (MHz) | Channel | Freq. (MHz) |
|-----------------|---------|-------------|---------|-------------|
| 2400-2483.5 MHz | 0 | 2402 | 21 | 2444 |
| | 1 | 2404 | 22 | 2446 |
| | 2 | 2406 | 23 | 2448 |
| | 3 | 2408 | 24 | 2450 |
| | 4 | 2410 | 25 | 2452 |
| | 5 | 2412 | 26 | 2454 |
| | 6 | 2414 | 27 | 2456 |
| | 7 | 2416 | 28 | 2458 |
| | 8 | 2418 | 29 | 2460 |
| | 9 | 2420 | 30 | 2462 |
| | 10 | 2422 | 31 | 2464 |
| | 11 | 2424 | 32 | 2466 |
| | 12 | 2426 | 33 | 2468 |
| | 13 | 2428 | 34 | 2470 |
| | 14 | 2430 | 35 | 2472 |
| | 15 | 2432 | 36 | 2474 |
| | 16 | 2434 | 37 | 2476 |
| | 17 | 2436 | 38 | 2478 |
| | 18 | 2438 | 39 | 2480 |
| | 19 | 2440 | - | - |
| 20 | 2442 | - | - | |



<Bluetooth HR>

| Frequency Band | Channel | Freq. (MHz) | Channel | Freq. (MHz) | Channel | Freq. (MHz) |
|-----------------|---------|-------------|---------|-------------|---------|-------------|
| 2400-2483.5 MHz | 2 | 2404 | 27 | 2429 | 52 | 2454 |
| | 3 | 2405 | 28 | 2430 | 53 | 2455 |
| | 4 | 2406 | 29 | 2431 | 54 | 2456 |
| | 5 | 2407 | 30 | 2432 | 55 | 2457 |
| | 6 | 2408 | 31 | 2433 | 56 | 2458 |
| | 7 | 2409 | 32 | 2434 | 57 | 2459 |
| | 8 | 2410 | 33 | 2435 | 58 | 2460 |
| | 9 | 2411 | 34 | 2436 | 59 | 2461 |
| | 10 | 2412 | 35 | 2437 | 60 | 2462 |
| | 11 | 2413 | 36 | 2438 | 61 | 2463 |
| | 12 | 2414 | 37 | 2439 | 62 | 2464 |
| | 13 | 2415 | 38 | 2440 | 63 | 2465 |
| | 14 | 2416 | 39 | 2441 | 64 | 2466 |
| | 15 | 2417 | 40 | 2442 | 65 | 2467 |
| | 16 | 2418 | 41 | 2443 | 66 | 2468 |
| | 17 | 2419 | 42 | 2444 | 67 | 2469 |
| | 18 | 2420 | 43 | 2445 | 68 | 2470 |
| | 19 | 2421 | 44 | 2446 | 69 | 2471 |
| | 20 | 2422 | 45 | 2447 | 70 | 2472 |
| | 21 | 2423 | 46 | 2448 | 71 | 2473 |
| | 22 | 2424 | 47 | 2449 | 72 | 2474 |
| | 23 | 2425 | 48 | 2450 | 73 | 2475 |
| | 24 | 2426 | 49 | 2451 | 74 | 2476 |
| | 25 | 2427 | 50 | 2452 | 75 | 2477 |
| | 26 | 2428 | 51 | 2453 | 76 | 2478 |



2.2 Test Mode

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape) and accessory (Adapter or Earphone), and adjusting the measurement antenna orientation, following C63.10 exploratory test procedures and only the worst case emissions were reported in this report, and the worst mode of radiated spurious emissions is X plane, and recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.

| Summary table of Test Cases | |
|-----------------------------|---|
| Test Item | Data Rate / Modulation |
| Conducted Test Cases | Bluetooth – LE / GFSK |
| | Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps |
| | Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps |
| | Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps |
| | Mode 4: Bluetooth Tx CH00_2402 MHz_2Mbps |
| | Mode 5: Bluetooth Tx CH19_2440 MHz_2Mbps |
| | Mode 6: Bluetooth Tx CH39_2480 MHz_2Mbps |
| | Mode 7: Bluetooth HR CH02_2404 MHz_4Mbps |
| | Mode 8: Bluetooth HR CH39_2447 MHz_4Mbps |
| | Mode 9: Bluetooth HR CH76_2478 MHz_4Mbps |
| | Mode 10: Bluetooth HR CH02_2404 MHz_8Mbps |
| | Mode 11: Bluetooth HR CH39_2441 MHz_8Mbps |
| | Mode 12: Bluetooth HR CH76_2478 MHz_8Mbps |




| Summary table of Test Cases | |
|---|---|
| Test Item | Data Rate / Modulation |
| Radiated Test Cases | <Ant. 3> |
| | Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps |
| | Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps |
| | Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps |
| | Mode 4: Bluetooth Tx CH00_2402 MHz_2Mbps |
| | Mode 5: Bluetooth Tx CH19_2440 MHz_2Mbps |
| | Mode 6: Bluetooth Tx CH39_2480 MHz_2Mbps |
| | Mode 7: Bluetooth HR CH02_2404 MHz_4Mbps |
| | Mode 8: Bluetooth HR CH39_2447 MHz_4Mbps |
| | Mode 9: Bluetooth HR CH76_2478 MHz_4Mbps |
| | Mode 10: Bluetooth HR CH02_2404 MHz_8Mbps |
| | Mode 11: Bluetooth HR CH39_2441 MHz_8Mbps |
| | Mode 12: Bluetooth HR CH76_2478 MHz_8Mbps |
| | <Ant. 4> |
| | Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps |
| | Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps |
| | Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps |
| | Mode 4: Bluetooth Tx CH00_2402 MHz_2Mbps |
| | Mode 5: Bluetooth Tx CH19_2440 MHz_2Mbps |
| | Mode 6: Bluetooth Tx CH39_2480 MHz_2Mbps |
| | Mode 7: Bluetooth HR CH02_2404 MHz_4Mbps |
| | Mode 8: Bluetooth HR CH39_2447 MHz_4Mbps |
| | Mode 9: Bluetooth HR CH76_2478 MHz_4Mbps |
| | Mode 10: Bluetooth HR CH02_2404 MHz_8Mbps |
| Mode 11: Bluetooth HR CH39_2441 MHz_8Mbps | |
| Mode 12: Bluetooth HR CH76_2478 MHz_8Mbps | |
| Remark: | |
| 1. For Radiated Test Cases, the tests were performed with AC Adapter 1 and USB Cable 3. | |
| 2. For radiation spurious emission, the modulation and the data rate picked for testing are determined by the Max. RF conducted power. | |
| 3. During the preliminary test, both charging modes (Adapter mode and WPT Charging mode) were verified. It is determined that the adaptor mode is the worst case for official test. | |
| 4. BLE 1Mbps mode is selected as worst mode among 1Mbps/2Mbps to perform emission test and only the worst case antenna is reported for frequency below 1GHz and above 18GHz. | |
| 5. BT HR 4Mbps mode is selected as worst mode among 4Mbps/8Mbps to perform emission test and only the worst case antenna is reported for frequency below 1GHz and above 18GHz. | |




| Summary table of Test Cases | |
|------------------------------------|---|
| Test Item | Test Mode |
| AC Conducted | Mode 1: 5G NR n5 Link + WLAN (2.4GHz) Link + Bluetooth on + USB Cable 3 |
| Emission | (Charging from AC Adapter 2) + NFC on + Handset mode + Battery < 50% |

2.3 Connection Diagram of Test System

<AC Conducted Emission Mode>

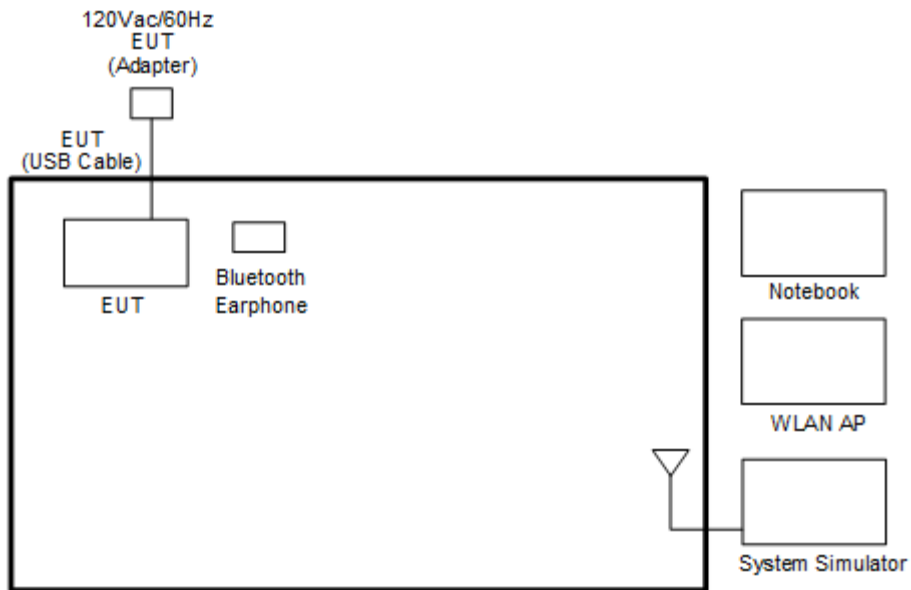

<Bluetooth-LE Tx Mode>

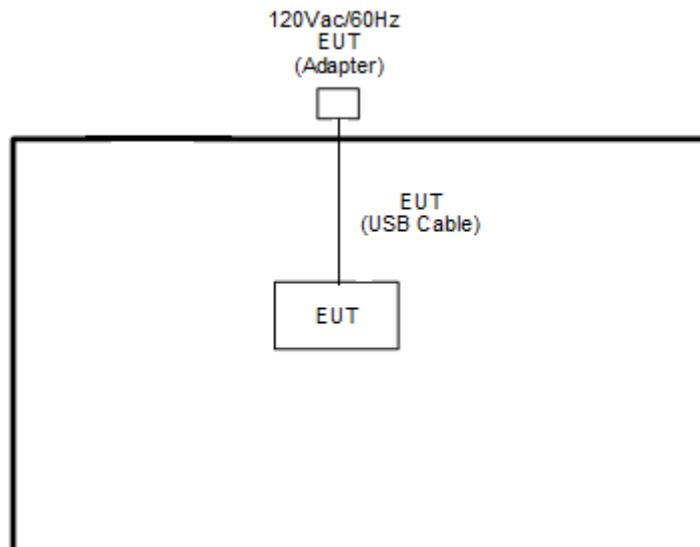



2.4 Support Unit used in test configuration and system

| Item | Equipment | Brand Name | Model Name | FCC ID | Data Cable | Power Cord |
|------|--------------------|---------------|----------------|-------------|------------|--|
| 1. | System Simulator | Anritsu | MT8820C | N/A | N/A | Unshielded, 1.8 m |
| 2. | Bluetooth Earphone | Sony Ericsson | MW600 | PY700A2029 | N/A | N/A |
| 3. | WLAN AP | Netgear | RAXE500 | PY320300508 | N/A | Unshielded, 1.8 m |
| 4. | Notebook | DELL | Latitude E3400 | FCC DoC | N/A | AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m |

2.5 EUT Operation Test Setup

The RF test items, utility “CMD 1.17.11461.0” was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10 dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.1.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 11.8.1 (6dB BW).
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW) $\geq 3 * RBW$.
6. Measure and record the results in the test report.

3.1.4 Test Setup

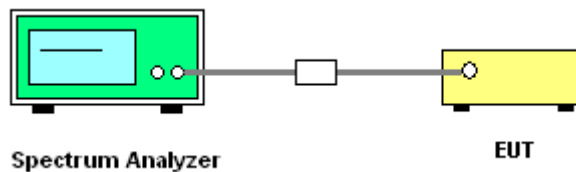

3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.

3.1.6 Test Result of 99% Occupied Bandwidth

Please refer to Appendix A.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5 MHz, the limit for output power is 30 dBm. If transmitting antenna of directional gain greater than 6 dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.


3.2.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.2.3 Test Procedures

1. For Average Power, the testing follows ANSI C63.10 Section 11.9.2.3.2 Method AVGPM-G
2. The RF output of EUT is connected to the power meter by RF cable and attenuator.
3. The path loss is compensated to the results for each measurement.
4. Set the maximum power setting and enable the EUT to transmit continuously.
5. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

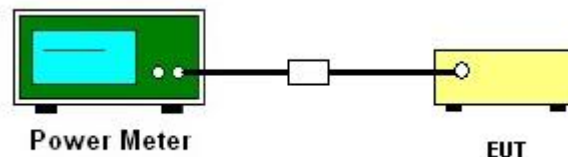

3.2.5 Test Result of Average Output Power

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8 dBm in any 3 kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.3.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.10.2 Method PKPSD.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth (VBW) = 10 kHz. In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6 dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100 kHz is a reference level and is used as 20 dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

3.3.4 Test Setup

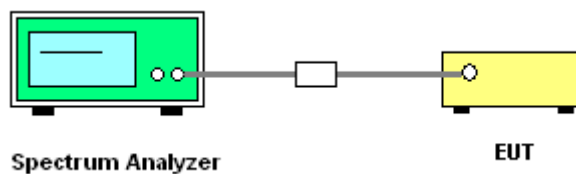

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement.


3.4.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.4.3 Test Procedure

1. The testing follows the ANSI C63.10 Section 11.11.3 Emission level measurement.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Set RBW = 100 kHz, VBW = 300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup

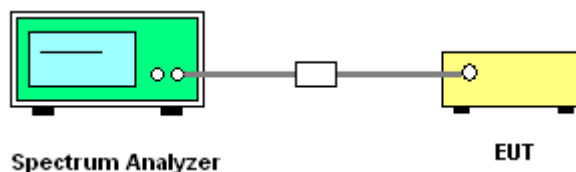

3.4.5 Test Result of Conducted Band Edges Plots

Please refer to Appendix A.

3.4.6 Test Result of Conducted Spurious Emission Plots

Please refer to Appendix A.



3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device is measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

| Frequency (MHz) | Field Strength (microvolts/meter) | Measurement Distance (meters) |
|-----------------|-----------------------------------|-------------------------------|
| 0.009 – 0.490 | 2400/F(kHz) | 300 |
| 0.490 – 1.705 | 24000/F(kHz) | 30 |
| 1.705 – 30.0 | 30 | 30 |
| 30 – 88 | 100 | 3 |
| 88 – 216 | 150 | 3 |
| 216 - 960 | 200 | 3 |
| Above 960 | 500 | 3 |

3.5.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.




3.5.3 Test Procedures


1. The testing follows the ANSI C63.10 Section 11.12.1 Radiated emission measurements.
2. The EUT is arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT is placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
4. The EUT is set 3 meters away from the receiving antenna, which is mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. Radiated testing below 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading. When there is no suspected emission found and the emission level is with at least 6 dB margin against QP limit line, the position is marked as “-“.
7. Radiated testing above 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading for scanning all frequencies. When there is no suspected emission found and the harmonic emission level is with at least 6 dB margin against average limit line, the position is marked as “-“.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW = 100 kHz for $f < 1$ GHz; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW = 3 MHz for $f \geq 1$ GHz for peak measurement.
For average measurement:
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated test below 30MHz

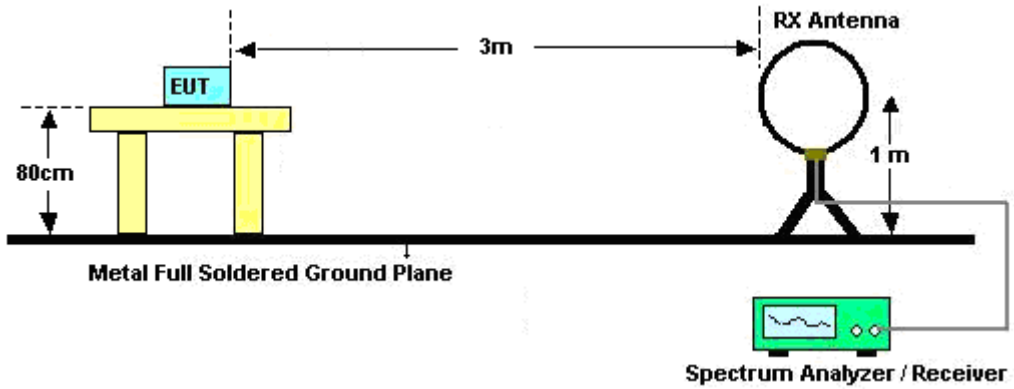


For radiated test from 30MHz to 1GHz

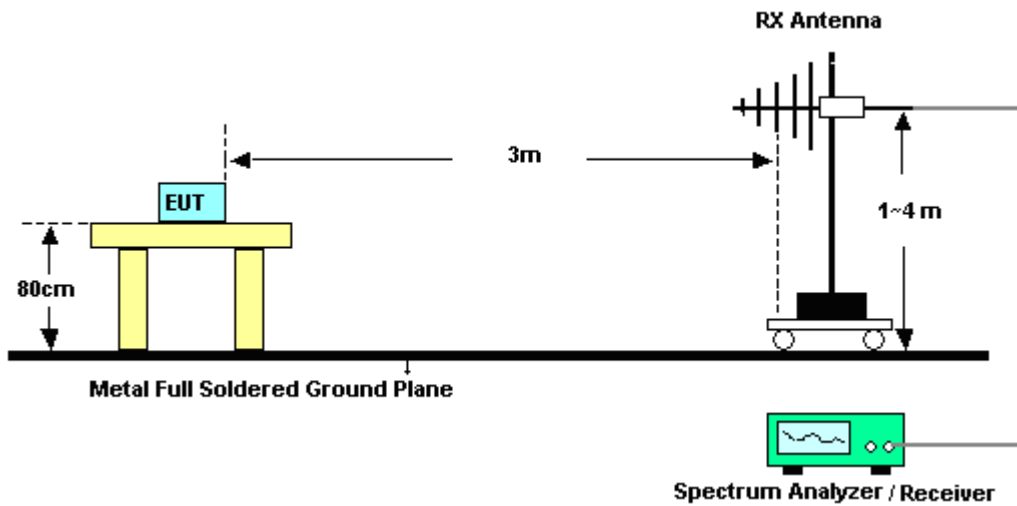

For radiated test from 1GHz to 18GHz

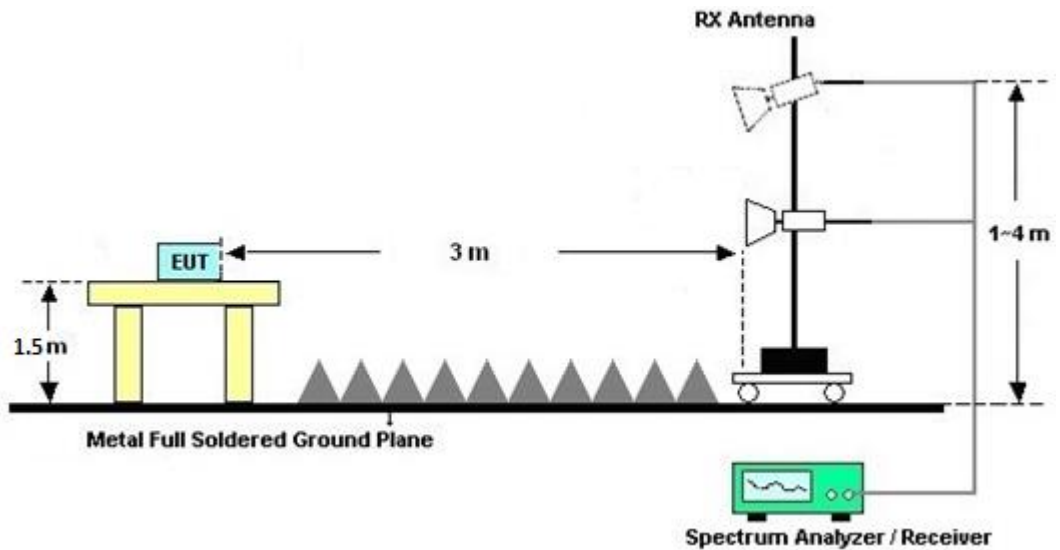

For radiated test above 18GHz

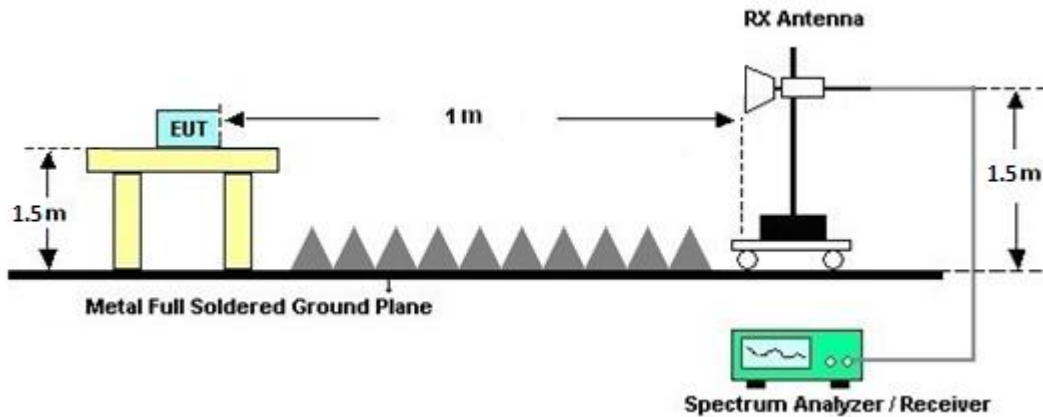

3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which starts from 9 kHz to 30 MHz, is pre-scanned and the result which is 20 dB lower than the limit line is not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result comes out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C and D.

3.5.7 Duty Cycle

Please refer to Appendix E.

3.5.8 Test Result of Radiated Spurious Emission (30 MHz ~ 10th Harmonic)

Please refer to Appendix C and D.



3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

| Frequency of emission (MHz) | Conducted limit (dB μ V) | |
|-----------------------------|------------------------------|-----------|
| | Quasi-peak | Average |
| 0.15-0.5 | 66 to 56* | 56 to 46* |
| 0.5-5 | 56 | 46 |
| 5-30 | 60 | 50 |

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.6.3 Test Procedures

1. The EUT is placed 0.4 meter away from the conducting wall of the shielding room, and is kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN shall be used.
6. Both Line and Neutral shall be tested in order to find out the maximum conducted emission.
7. The frequency range from 150 kHz to 30 MHz is scanned.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9 kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.6.4 Test Setup

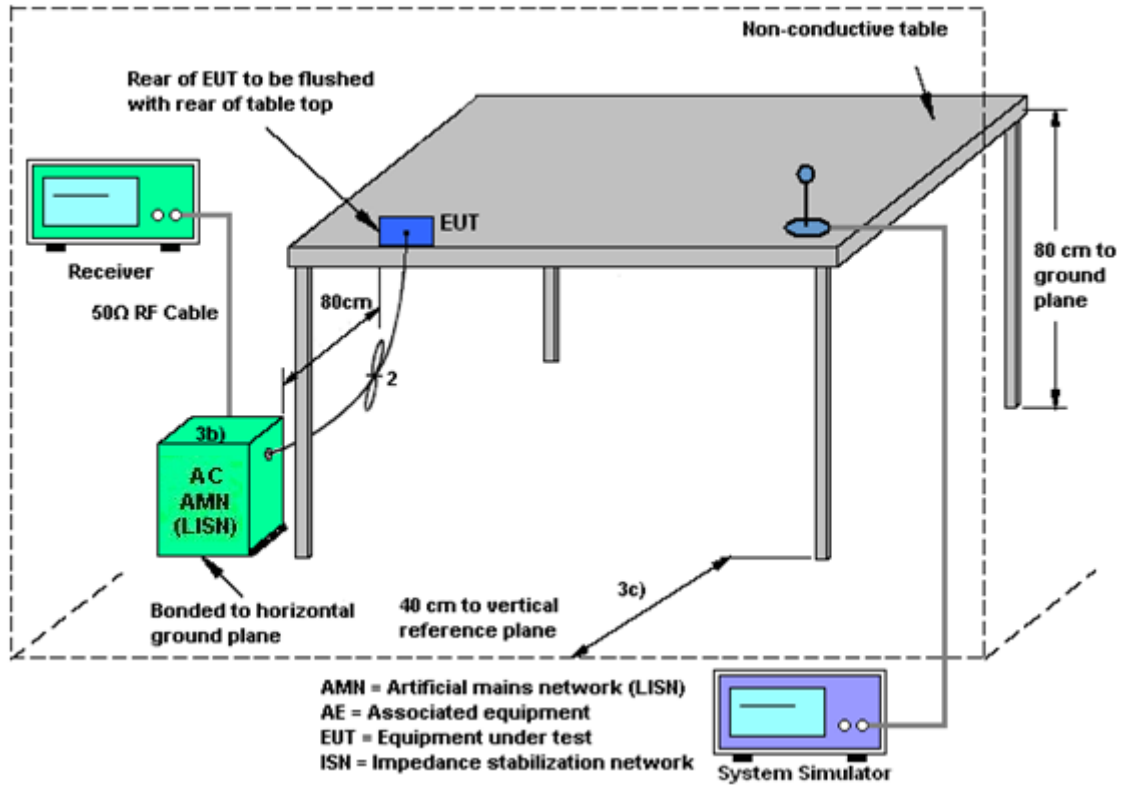

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.



4 List of Measuring Equipment

| Instrument | Brand Name | Model No. | Serial No. | Characteristics | Calibration Date | Test Date | Due Date | Remark |
|----------------------------------|-----------------|----------------------------|----------------------------|-------------------------------|------------------|---------------------------------|---------------|--------------------------|
| Loop Antenna | Rohde & Schwarz | HFH2-Z2 | 100315 | 9kHz~30MHz | Feb. 28, 2023 | Jul. 26, 2023~ Nov. 03, 2023 | Feb. 27, 2024 | Radiation (03CH22-HY) |
| Bilog Antenna | TESEQ & WOKEN | CBL 6111D & 00802N1D-06 | 63304 & 002 | 30MHz~1GHz | Oct. 04, 2022 | Jul. 26, 2023~ Oct. 02, 2023 | Oct. 03, 2023 | Radiation (03CH22-HY) |
| Bilog Antenna | TESEQ & WOKEN | CBL 6111D & 00800N1D01N-06 | 41912 & 05 | 30MHz~1GHz | Feb. 05, 2023 | Oct. 03, 2023~ Oct. 13, 2023 | Feb. 04, 2024 | Radiation (03CH22-HY) |
| Bilog Antenna | TESEQ & WOKEN | CBL 6111D & 00802N1D-06 | 63304 & 002 | 30MHz~1GHz | Oct. 15, 2023 | Oct. 15, 2023~ Nov. 03, 2023 | Oct. 14, 2024 | Radiation (03CH22-HY) |
| Amplifier | SONOMA | 310N | 421581 | N/A | Jul. 15, 2023 | Jul. 26, 2023~ Nov. 03, 2023 | Jul. 14, 2024 | Radiation (03CH22-HY) |
| Double Ridged Guide Horn Antenna | RFSPIN | DRH18-E | LE2C04A18EN | 1GHz~18GHz | Jul. 12, 2023 | Jul. 26, 2023~ Nov. 03, 2023 | Jul. 11, 2024 | Radiation (03CH22-HY) |
| SHF-EHF Horn Antenna | SCHWARZBECK | BBHA 9170 | 1223 | 18GHz-40GHz | Jul. 10, 2023 | Jul. 26, 2023~ Nov. 03, 2023 | Jul. 09, 2024 | Radiation (03CH22-HY) |
| Amplifier | EMEC | EM01G18GA | 060877 | N/A | Sep. 29, 2022 | Jul. 26, 2023~ Sep. 27, 2023 | Sep. 28, 2023 | Radiation (03CH22-HY) |
| Amplifier | EMEC | EM01G18GA | 060877 | N/A | Sep. 28, 2023 | Sep. 28, 2023~ Nov. 03, 2023 | Sep. 27, 2024 | Radiation (03CH22-HY) |
| Preamplifier | EMEC | EM18G40G | 060801 | 18-40GHz | Jun. 27, 2023 | Jul. 26, 2023~ Nov. 03, 2023 | Jun. 26, 2024 | Radiation (03CH22-HY) |
| Signal Analyzer | Keysight | N9010B | MY60241058 | 10Hz~44GHz | Jul. 06, 2023 | Jul. 26, 2023~ Nov. 03, 2023 | Jul. 05, 2024 | Radiation (03CH22-HY) |
| Hygrometer | TECPEL | DTM-303A | TP211559 | N/A | Nov. 17, 2022 | Jul. 26, 2023~ Nov. 03, 2023 | Nov. 16, 2023 | Radiation (03CH22-HY) |
| Controller | EMEC | EM1000 | N/A | Control Turn table & Ant Mast | N/A | Jul. 26, 2023~ Nov. 03, 2023 | N/A | Radiation (03CH22-HY) |
| Antenna Mast | ChainTek | MBS-520-1 | N/A | 1m~4m | N/A | Jul. 26, 2023~ Nov. 03, 2023 | N/A | Radiation (03CH22-HY) |
| Turn Table | ChainTek | T-200-S-1 | N/A | 0~360 Degree | N/A | Jul. 26, 2023~ Nov. 03, 2023 | N/A | Radiation (03CH22-HY) |
| Software | Audix | E3 6.09824_2019 122 | RK-002347 | N/A | N/A | Jul. 26, 2023~ Nov. 03, 2023 | N/A | Radiation (03CH22-HY) |
| RF Cable | HUBER + SUHNER | SUCOFLEX 102 | 803951/2 | 9kHz~30MHz | Mar. 07, 2023 | Jul. 26, 2023~ Nov. 03, 2023 | Mar. 06, 2024 | Radiation (03CH22-HY) |
| RF Cable | HUBER + SUHNER | SUCOFLEX 102 | 804390/2,804611/2,804615/2 | N/A | Oct. 25, 2022 | Jul. 26, 2023~ Oct. 23, 2023 | Oct. 24, 2023 | Radiation (03CH22-HY) |
| RF Cable | HUBER + SUHNER | SUCOFLEX 102 | 804390/2,804611/2,804615/2 | N/A | Oct. 24, 2023 | Oct. 24, 2023~ Nov. 03, 2023 | Oct. 23, 2024 | Radiation (03CH22-HY) |



| Instrument | Brand Name | Model No. | Serial No. | Characteristics | Calibration Date | Test Date | Due Date | Remark |
|---------------------|-----------------|------------------|----------------------------|-----------------|------------------|---------------------------------|---------------|-------------------------|
| Hygrometer | TECEPEL | DTM-303A | TP201996 | N/A | Nov. 17, 2022 | Jul. 13, 2023~ Aug. 08, 2023 | Nov. 16, 2023 | Conducted (TH05-HY) |
| Power Sensor | DARE | RPR3006W | 16I00054SNO 12 (NO:113) | 10MHz~6GHz | Dec. 13, 2022 | Jul. 13, 2023~ Jul. 24, 2023 | Dec. 12, 2023 | Conducted (TH05-HY) |
| Power Meter | Anritsu | ML2495A | 1036004 | N/A | Aug. 08, 2022 | Jul. 19, 2023~ Jul. 26, 2023 | Aug. 07, 2023 | Conducted (TH05-HY) |
| Power Meter | Anritsu | ML2495A | 1036004 | N/A | Jul. 27, 2023 | Jul. 27, 2023~ Aug. 08, 2023 | Jul. 26, 2024 | Conducted (TH05-HY) |
| Signal Analyzer | Rohde & Schwarz | FSV40 | 101905 | 10Hz - 40GHz | Aug. 03, 2022 | Jul. 13, 2023~ Jul. 24, 2023 | Aug. 02, 2023 | Conducted (TH05-HY) |
| Power Sensor | Anritsu | MA2411B | 1027253 | 300MHz~40GHz | Aug. 08, 2022 | Jul. 19, 2023~ Jul. 26, 2023 | Aug. 07, 2023 | Conducted (TH05-HY) |
| Power Sensor | Anritsu | MA2411B | 1027253 | 300MHz~40GHz | Jul. 27, 2023 | Jul. 27, 2023~ Aug. 08, 2023 | Jul. 26, 2024 | Conducted (TH05-HY) |
| Signal Analyzer | Rohde & Schwarz | FSV40 | 101565 | 10Hz - 40GHz | Dec. 26, 2022 | Jul. 19, 2023~ Aug. 08, 2023 | Dec. 25, 2023 | Conducted (TH05-HY) |
| AC Power Source | ACPOWER | AFC-11003G | F317040033 | N/A | N/A | Sep. 28, 2023 | N/A | Conduction (CO07-HY) |
| Software | Rohde & Schwarz | EMC32 V10.30 | N/A | N/A | N/A | Sep. 28, 2023 | N/A | Conduction (CO07-HY) |
| Pulse Limiter | SCHWARZBECK | VTSD 9561-F N | 9561-F N00373 | 9kHz-200MHz | Nov. 01, 2022 | Sep. 28, 2023 | Oct. 31, 2023 | Conduction (CO07-HY) |
| RF Cable | HUBER + SUHNER | RG 214/U | 1358175 | 9kHz~30MHz | Mar. 15, 2023 | Sep. 28, 2023 | Mar. 14, 2024 | Conduction (CO07-HY) |
| Two-Line V-Network | TESEQ | NNB 51 | 45051 | N/A | Mar. 05, 2023 | Sep. 28, 2023 | Mar. 04, 2024 | Conduction (CO07-HY) |
| Four-Line V-Network | TESEQ | NNB 52 | 36122 | N/A | Mar. 13, 2023 | Sep. 28, 2023 | Mar. 12, 2024 | Conduction (CO07-HY) |
| EMI Test Receiver | Rohde & Schwarz | ESC17 | 100724 | 9kHz~7GHz | Feb. 24, 2023 | Sep. 28, 2023 | Feb. 23, 2024 | Conduction (CO07-HY) |



5 Measurement Uncertainty

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

| | |
|---|---------|
| Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$) | 3.46 dB |
|---|---------|

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

| | |
|---|---------|
| Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$) | 5.92 dB |
|---|---------|

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 6000 MHz)

| | |
|---|---------|
| Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$) | 4.42 dB |
|---|---------|

Uncertainty of Radiated Emission Measurement (6000 MHz ~ 18000 MHz)

| | |
|---|---------|
| Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$) | 4.40 dB |
|---|---------|

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

| | |
|---|---------|
| Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$) | 5.38 dB |
|---|---------|

Appendix A. Test Result of Conducted Test Items

| | | | | |
|----------------|-----------------------|--------------------|-------|----|
| Test Engineer: | Mina Liu | Temperature: | 21~25 | °C |
| Test Date: | 2023/07/13~2023/08/08 | Relative Humidity: | 51~54 | % |

<Ant. 3>

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

| Mod. | Data Rate | NTX | CH. | Freq. (MHz) | 99% Occupied BW (MHz) | 6dB BW (MHz) | 6dB BW Limit (MHz) | Pass/Fail |
|------|-----------|-----|-----|-------------|-----------------------|--------------|--------------------|-----------|
| BLE | 1Mbps | 1 | 0 | 2402 | 1.037 | 0.716 | 0.50 | Pass |
| BLE | 1Mbps | 1 | 19 | 2440 | 1.037 | 0.716 | 0.50 | Pass |
| BLE | 1Mbps | 1 | 39 | 2480 | 1.037 | 0.720 | 0.50 | Pass |

TEST RESULTS DATA
Average Power Table

| Mod. | Data Rate | NTX | CH. | Freq. (MHz) | Average Conducted Power (dBm) | Conducted Power Limit (dBm) | DG (dBi) | EIRP Power (dBm) | EIRP Power Limit (dBm) | Pass /Fail |
|------|-----------|-----|-----|-------------|-------------------------------|-----------------------------|----------|------------------|------------------------|------------|
| BLE | 1Mbps | 1 | 0 | 2402 | 19.25 | 30.00 | -1.20 | 18.05 | 36.00 | Pass |
| BLE | 1Mbps | 1 | 19 | 2440 | 19.55 | 30.00 | -1.20 | 18.35 | 36.00 | Pass |
| BLE | 1Mbps | 1 | 39 | 2480 | 19.85 | 30.00 | -1.20 | 18.65 | 36.00 | Pass |

TEST RESULTS DATA
Peak Power Density

| Mod. | Data Rate | NTX | CH. | Freq. (MHz) | Peak PSD (dBm /100kHz) | Peak PSD (dBm /3kHz) | DG (dBi) | Peak PSD Limit (dBm /3kHz) | Pass/Fail |
|------|-----------|-----|-----|-------------|------------------------|----------------------|----------|----------------------------|-----------|
| BLE | 1Mbps | 1 | 0 | 2402 | 18.68 | 4.05 | -1.20 | 8.00 | Pass |
| BLE | 1Mbps | 1 | 19 | 2440 | 18.91 | 4.25 | -1.20 | 8.00 | Pass |
| BLE | 1Mbps | 1 | 39 | 2480 | 18.84 | 4.26 | -1.20 | 8.00 | Pass |

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

| Mod. | Data Rate | NTX | CH. | Freq. (MHz) | 99% Occupied BW (MHz) | 6dB BW (MHz) | 6dB BW Limit (MHz) | Pass/Fail |
|------|-----------|-----|-----|-------------|-----------------------|--------------|--------------------|-----------|
| BLE | 2Mbps | 1 | 0 | 2402 | 2.070 | 1.248 | 0.50 | Pass |
| BLE | 2Mbps | 1 | 19 | 2440 | 2.074 | 1.252 | 0.50 | Pass |
| BLE | 2Mbps | 1 | 39 | 2480 | 2.070 | 1.248 | 0.50 | Pass |

TEST RESULTS DATA
Average Power Table

| Mod. | Data Rate | NTX | CH. | Freq. (MHz) | Average Conducted Power (dBm) | Conducted Power Limit (dBm) | DG (dBi) | EIRP Power (dBm) | EIRP Power Limit (dBm) | Pass /Fail |
|------|-----------|-----|-----|-------------|-------------------------------|-----------------------------|----------|------------------|------------------------|------------|
| BLE | 2Mbps | 1 | 0 | 2402 | 19.95 | 30.00 | -1.20 | 18.75 | 36.00 | Pass |
| BLE | 2Mbps | 1 | 19 | 2440 | 19.95 | 30.00 | -1.20 | 18.75 | 36.00 | Pass |
| BLE | 2Mbps | 1 | 39 | 2480 | 19.95 | 30.00 | -1.20 | 18.75 | 36.00 | Pass |

TEST RESULTS DATA
Peak Power Density

| Mod. | Data Rate | NTX | CH. | Freq. (MHz) | Peak PSD (dBm /100kHz) | Peak PSD (dBm /3kHz) | DG (dBi) | Peak PSD Limit (dBm /3kHz) | Pass/Fail |
|------|-----------|-----|-----|-------------|------------------------|----------------------|----------|----------------------------|-----------|
| BLE | 2Mbps | 1 | 0 | 2402 | 18.81 | 0.49 | -1.20 | 8.00 | Pass |
| BLE | 2Mbps | 1 | 19 | 2440 | 18.88 | 0.62 | -1.20 | 8.00 | Pass |
| BLE | 2Mbps | 1 | 39 | 2480 | 18.52 | 0.24 | -1.20 | 8.00 | Pass |

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

| Mod. | Data Rate | NTX | CH. | Freq. (MHz) | 99% Occupied BW (MHz) | 6dB BW (MHz) | 6dB BW Limit (MHz) | Pass/Fail |
|------|-----------|-----|-----|-------------|-----------------------|--------------|--------------------|-----------|
| BT | 4Mbps | 1 | 2 | 2404 | 2.406 | 1.600 | 0.50 | Pass |
| BT | 4Mbps | 1 | 39 | 2441 | 2.406 | 1.360 | 0.50 | Pass |
| BT | 4Mbps | 1 | 76 | 2478 | 2.406 | 1.616 | 0.50 | Pass |

TEST RESULTS DATA
Average Power Table

| Mod. | Data Rate | NTX | CH. | Freq. (MHz) | Average Conducted Power (dBm) | Conducted Power Limit (dBm) | DG (dBi) | EIRP Power (dBm) | EIRP Power Limit (dBm) | Pass /Fail |
|------|-----------|-----|-----|-------------|-------------------------------|-----------------------------|----------|------------------|------------------------|------------|
| BT | 4Mbps | 1 | 2 | 2404 | 17.75 | 30.00 | -1.20 | 16.55 | 36.00 | Pass |
| BT | 4Mbps | 1 | 39 | 2441 | 17.35 | 30.00 | -1.20 | 16.15 | 36.00 | Pass |
| BT | 4Mbps | 1 | 76 | 2478 | 17.25 | 30.00 | -1.20 | 16.05 | 36.00 | Pass |

TEST RESULTS DATA
Peak Power Density

| Mod. | Data Rate | NTX | CH. | Freq. (MHz) | Peak PSD (dBm /100kHz) | Peak PSD (dBm /3kHz) | DG (dBi) | Peak PSD Limit (dBm /3kHz) | Pass/Fail |
|------|-----------|-----|-----|-------------|------------------------|----------------------|----------|----------------------------|-----------|
| BT | 4Mbps | 1 | 2 | 2404 | 16.83 | 1.00 | -1.20 | 8.00 | Pass |
| BT | 4Mbps | 1 | 39 | 2441 | 16.54 | 0.60 | -1.20 | 8.00 | Pass |
| BT | 4Mbps | 1 | 76 | 2478 | 16.17 | 0.42 | -1.20 | 8.00 | Pass |

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

| Mod. | Data Rate | NTX | CH. | Freq. (MHz) | 99% Occupied BW (MHz) | 6dB BW (MHz) | 6dB BW Limit (MHz) | Pass/Fail |
|------|-----------|-----|-----|-------------|-----------------------|--------------|--------------------|-----------|
| BT | 8Mbps | 1 | 2 | 2404 | 4.603 | 0.672 | 0.50 | Pass |
| BT | 8Mbps | 1 | 39 | 2441 | 4.619 | 0.672 | 0.50 | Pass |
| BT | 8Mbps | 1 | 76 | 2478 | 4.603 | 0.672 | 0.50 | Pass |

TEST RESULTS DATA
Average Power Table

| Mod. | Data Rate | NTX | CH. | Freq. (MHz) | Average Conducted Power (dBm) | Conducted Power Limit (dBm) | DG (dBi) | EIRP Power (dBm) | EIRP Power Limit (dBm) | Pass /Fail |
|------|-----------|-----|-----|-------------|-------------------------------|-----------------------------|----------|------------------|------------------------|------------|
| BT | 8Mbps | 1 | 2 | 2404 | 17.55 | 30.00 | -1.20 | 16.35 | 36.00 | Pass |
| BT | 8Mbps | 1 | 39 | 2441 | 17.35 | 30.00 | -1.20 | 16.15 | 36.00 | Pass |
| BT | 8Mbps | 1 | 76 | 2478 | 14.25 | 30.00 | -1.20 | 13.05 | 36.00 | Pass |

TEST RESULTS DATA
Peak Power Density

| Mod. | Data Rate | NTX | CH. | Freq. (MHz) | Peak PSD (dBm /100kHz) | Peak PSD (dBm /3kHz) | DG (dBi) | Peak PSD Limit (dBm /3kHz) | Pass/Fail |
|------|-----------|-----|-----|-------------|------------------------|----------------------|----------|----------------------------|-----------|
| BT | 8Mbps | 1 | 2 | 2404 | 16.64 | 1.30 | -1.20 | 8.00 | Pass |
| BT | 8Mbps | 1 | 39 | 2441 | 16.31 | 1.34 | -1.20 | 8.00 | Pass |
| BT | 8Mbps | 1 | 76 | 2478 | 13.19 | -2.18 | -1.20 | 8.00 | Pass |

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.

<Ant. 4>

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

| Mod. | Data Rate | NTX | CH. | Freq. (MHz) | 99% Occupied BW (MHz) | 6dB BW (MHz) | 6dB BW Limit (MHz) | Pass/Fail |
|------|-----------|-----|-----|-------------|-----------------------|--------------|--------------------|-----------|
| BLE | 1Mbps | 1 | 0 | 2402 | 1.037 | 0.718 | 0.50 | Pass |
| BLE | 1Mbps | 1 | 19 | 2440 | 1.035 | 0.718 | 0.50 | Pass |
| BLE | 1Mbps | 1 | 39 | 2480 | 1.035 | 0.714 | 0.50 | Pass |

TEST RESULTS DATA
Average Power Table

| Mod. | Data Rate | NTX | CH. | Freq. (MHz) | Average Conducted Power (dBm) | Conducted Power Limit (dBm) | DG (dBi) | EIRP Power (dBm) | EIRP Power Limit (dBm) | Pass /Fail |
|------|-----------|-----|-----|-------------|-------------------------------|-----------------------------|----------|------------------|------------------------|------------|
| BLE | 1Mbps | 1 | 0 | 2402 | 19.40 | 30.00 | -1.20 | 18.20 | 36.00 | Pass |
| BLE | 1Mbps | 1 | 19 | 2440 | 19.90 | 30.00 | -1.20 | 18.70 | 36.00 | Pass |
| BLE | 1Mbps | 1 | 39 | 2480 | 19.70 | 30.00 | -1.20 | 18.50 | 36.00 | Pass |

TEST RESULTS DATA
Peak Power Density

| Mod. | Data Rate | NTX | CH. | Freq. (MHz) | Peak PSD (dBm /100kHz) | Peak PSD (dBm /3kHz) | DG (dBi) | Peak PSD Limit (dBm /3kHz) | Pass/Fail |
|------|-----------|-----|-----|-------------|------------------------|----------------------|----------|----------------------------|-----------|
| BLE | 1Mbps | 1 | 0 | 2402 | 18.65 | 3.99 | -1.20 | 8.00 | Pass |
| BLE | 1Mbps | 1 | 19 | 2440 | 18.66 | 4.01 | -1.20 | 8.00 | Pass |
| BLE | 1Mbps | 1 | 39 | 2480 | 19.33 | 4.72 | -1.20 | 8.00 | Pass |

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

| Mod. | Data Rate | NTX | CH. | Freq. (MHz) | 99% Occupied BW (MHz) | 6dB BW (MHz) | 6dB BW Limit (MHz) | Pass/Fail |
|------|-----------|-----|-----|-------------|-----------------------|--------------|--------------------|-----------|
| BLE | 2Mbps | 1 | 0 | 2402 | 2.070 | 1.248 | 0.50 | Pass |
| BLE | 2Mbps | 1 | 19 | 2440 | 2.070 | 1.252 | 0.50 | Pass |
| BLE | 2Mbps | 1 | 39 | 2480 | 2.066 | 1.244 | 0.50 | Pass |

TEST RESULTS DATA
Average Power Table

| Mod. | Data Rate | NTX | CH. | Freq. (MHz) | Average Conducted Power (dBm) | Conducted Power Limit (dBm) | DG (dBi) | EIRP Power (dBm) | EIRP Power Limit (dBm) | Pass /Fail |
|------|-----------|-----|-----|-------------|-------------------------------|-----------------------------|----------|------------------|------------------------|------------|
| BLE | 2Mbps | 1 | 0 | 2402 | 19.70 | 30.00 | -1.20 | 18.50 | 36.00 | Pass |
| BLE | 2Mbps | 1 | 19 | 2440 | 19.70 | 30.00 | -1.20 | 18.50 | 36.00 | Pass |
| BLE | 2Mbps | 1 | 39 | 2480 | 19.90 | 30.00 | -1.20 | 18.70 | 36.00 | Pass |

TEST RESULTS DATA
Peak Power Density

| Mod. | Data Rate | NTX | CH. | Freq. (MHz) | Peak PSD (dBm /100kHz) | Peak PSD (dBm /3kHz) | DG (dBi) | Peak PSD Limit (dBm /3kHz) | Pass/Fail |
|------|-----------|-----|-----|-------------|------------------------|----------------------|----------|----------------------------|-----------|
| BLE | 2Mbps | 1 | 0 | 2402 | 19.16 | 0.83 | -1.20 | 8.00 | Pass |
| BLE | 2Mbps | 1 | 19 | 2440 | 18.95 | 0.59 | -1.20 | 8.00 | Pass |
| BLE | 2Mbps | 1 | 39 | 2480 | 19.41 | 1.07 | -1.20 | 8.00 | Pass |

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

| Mod. | Data Rate | NTX | CH. | Freq. (MHz) | 99% Occupied BW (MHz) | 6dB BW (MHz) | 6dB BW Limit (MHz) | Pass/Fail |
|------|-----------|-----|-----|-------------|-----------------------|--------------|--------------------|-----------|
| BT | 4Mbps | 1 | 2 | 2404 | 2.398 | 1.600 | 0.50 | Pass |
| BT | 4Mbps | 1 | 39 | 2441 | 2.406 | 1.584 | 0.50 | Pass |
| BT | 4Mbps | 1 | 76 | 2478 | 2.414 | 1.616 | 0.50 | Pass |

TEST RESULTS DATA
Average Power Table

| Mod. | Data Rate | NTX | CH. | Freq. (MHz) | Average Conducted Power (dBm) | Conducted Power Limit (dBm) | DG (dBi) | EIRP Power (dBm) | EIRP Power Limit (dBm) | Pass /Fail |
|------|-----------|-----|-----|-------------|-------------------------------|-----------------------------|----------|------------------|------------------------|------------|
| BT | 4Mbps | 1 | 2 | 2404 | 17.80 | 30.00 | -1.20 | 16.60 | 36.00 | Pass |
| BT | 4Mbps | 1 | 39 | 2441 | 17.70 | 30.00 | -1.20 | 16.50 | 36.00 | Pass |
| BT | 4Mbps | 1 | 76 | 2478 | 17.60 | 30.00 | -1.20 | 16.40 | 36.00 | Pass |

TEST RESULTS DATA
Peak Power Density

| Mod. | Data Rate | NTX | CH. | Freq. (MHz) | Peak PSD (dBm /100kHz) | Peak PSD (dBm /3kHz) | DG (dBi) | Peak PSD Limit (dBm /3kHz) | Pass/Fail |
|------|-----------|-----|-----|-------------|------------------------|----------------------|----------|----------------------------|-----------|
| BT | 4Mbps | 1 | 2 | 2404 | 16.93 | 1.21 | -1.20 | 8.00 | Pass |
| BT | 4Mbps | 1 | 39 | 2441 | 16.49 | 0.70 | -1.20 | 8.00 | Pass |
| BT | 4Mbps | 1 | 76 | 2478 | 16.02 | 0.26 | -1.20 | 8.00 | Pass |

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

| Mod. | Data Rate | NTX | CH. | Freq. (MHz) | 99% Occupied BW (MHz) | 6dB BW (MHz) | 6dB BW Limit (MHz) | Pass/Fail |
|------|-----------|-----|-----|-------------|-----------------------|--------------|--------------------|-----------|
| BT | 8Mbps | 1 | 2 | 2404 | 4.603 | 0.688 | 0.50 | Pass |
| BT | 8Mbps | 1 | 39 | 2441 | 4.603 | 0.672 | 0.50 | Pass |
| BT | 8Mbps | 1 | 76 | 2478 | 4.619 | 0.688 | 0.50 | Pass |

TEST RESULTS DATA
Average Power Table

| Mod. | Data Rate | NTX | CH. | Freq. (MHz) | Average Conducted Power (dBm) | Conducted Power Limit (dBm) | DG (dBi) | EIRP Power (dBm) | EIRP Power Limit (dBm) | Pass /Fail |
|------|-----------|-----|-----|-------------|-------------------------------|-----------------------------|----------|------------------|------------------------|------------|
| BT | 8Mbps | 1 | 2 | 2404 | 18.00 | 30.00 | -1.20 | 16.80 | 36.00 | Pass |
| BT | 8Mbps | 1 | 39 | 2441 | 17.80 | 30.00 | -1.20 | 16.60 | 36.00 | Pass |
| BT | 8Mbps | 1 | 76 | 2478 | 14.30 | 30.00 | -1.20 | 13.10 | 36.00 | Pass |

TEST RESULTS DATA
Peak Power Density

| Mod. | Data Rate | NTX | CH. | Freq. (MHz) | Peak PSD (dBm /100kHz) | Peak PSD (dBm /3kHz) | DG (dBi) | Peak PSD Limit (dBm /3kHz) | Pass/Fail |
|------|-----------|-----|-----|-------------|------------------------|----------------------|----------|----------------------------|-----------|
| BT | 8Mbps | 1 | 2 | 2404 | 17.09 | 2.20 | -1.20 | 8.00 | Pass |
| BT | 8Mbps | 1 | 39 | 2441 | 16.41 | 1.27 | -1.20 | 8.00 | Pass |
| BT | 8Mbps | 1 | 76 | 2478 | 13.39 | -1.56 | -1.20 | 8.00 | Pass |

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.




<Ant. 3>


6dB Bandwidth

<1Mbps>


6 dB Bandwidth Plot on Channel 00

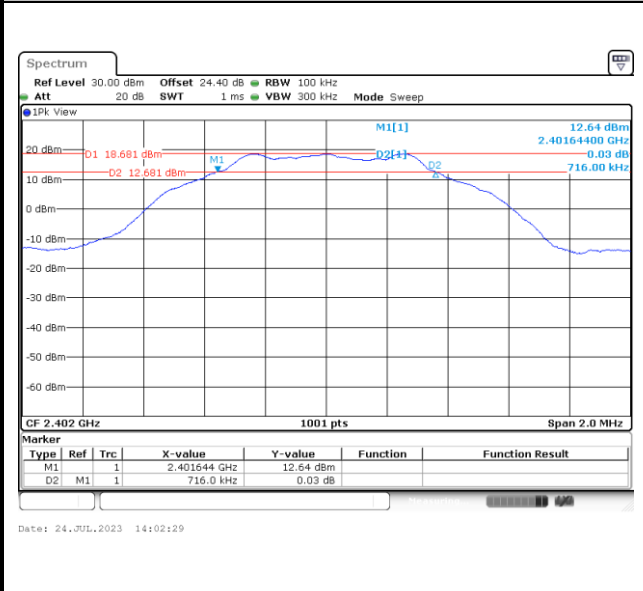

6 dB Bandwidth Plot on Channel 19

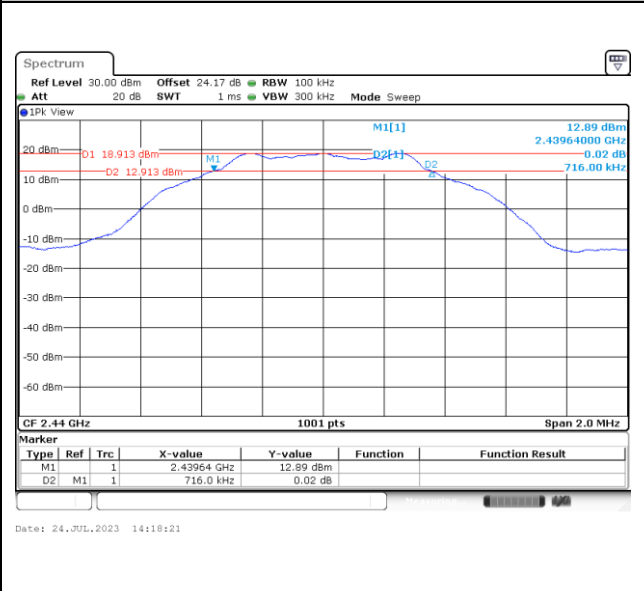


6 dB Bandwidth Plot on Channel 39

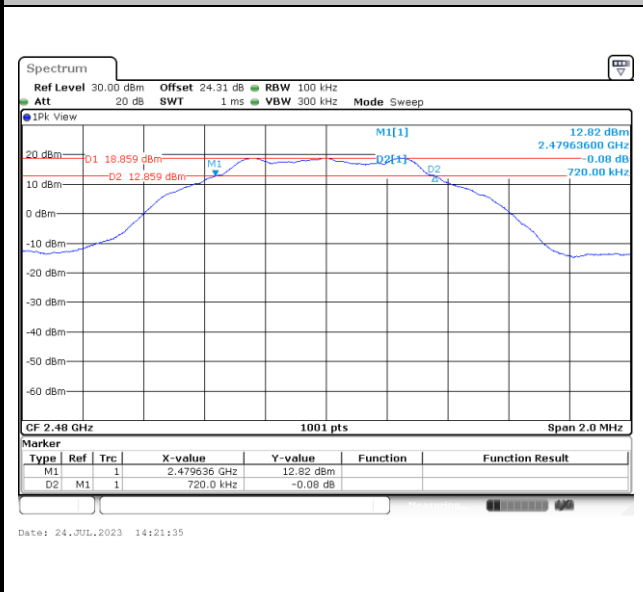




<2Mbps>

6 dB Bandwidth Plot on Channel 00

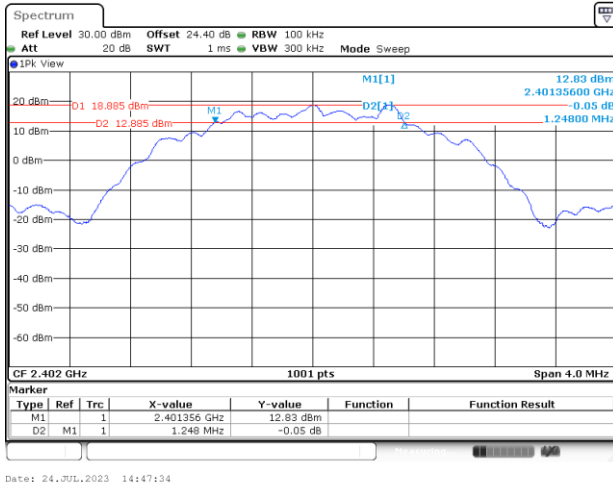


Date: 24.JUL.2023 14:47:34

6 dB Bandwidth Plot on Channel 19

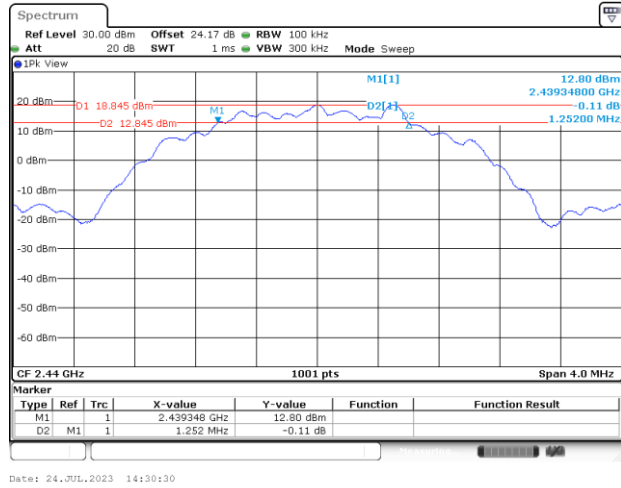

Date: 24.JUL.2023 14:30:30

6 dB Bandwidth Plot on Channel 39

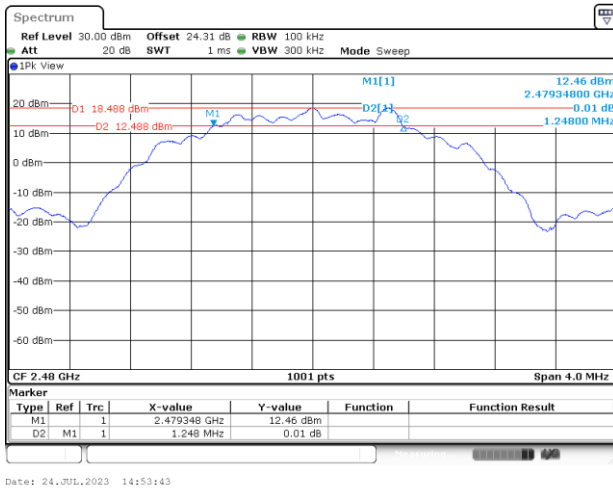


Date: 24.JUL.2023 14:53:43




99% Occupied Bandwidth

<1Mbps>


99% Occupied Bandwidth Plot on Channel 00

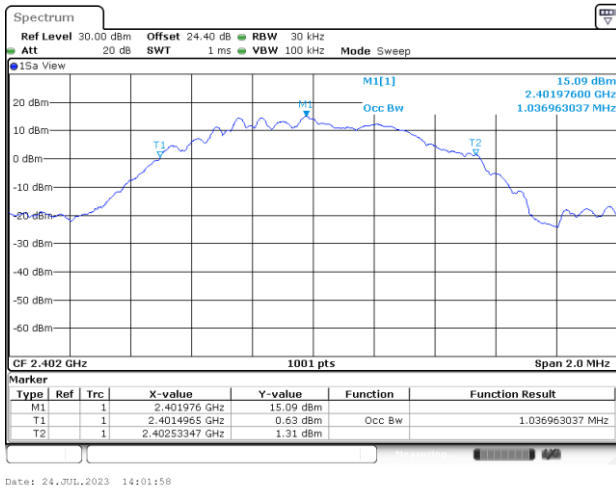

99% Occupied Plot Bandwidth on Channel 19

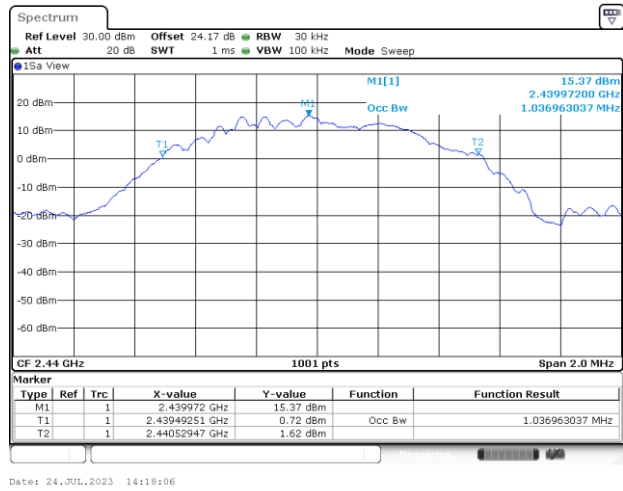

99% Occupied Bandwidth Plot on Channel 39

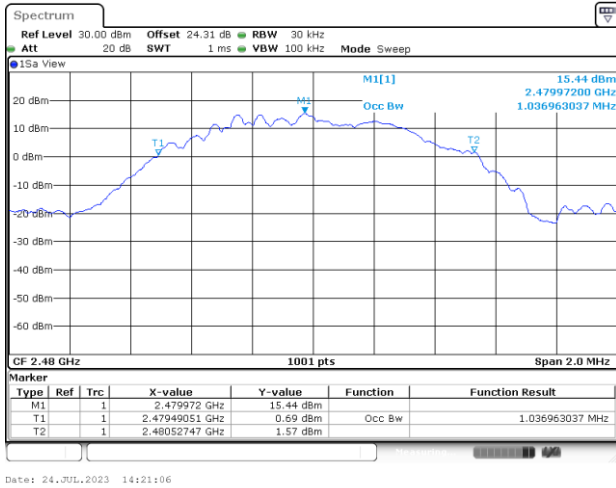


Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.




<2Mbps>

99% Occupied Bandwidth Plot on Channel 00

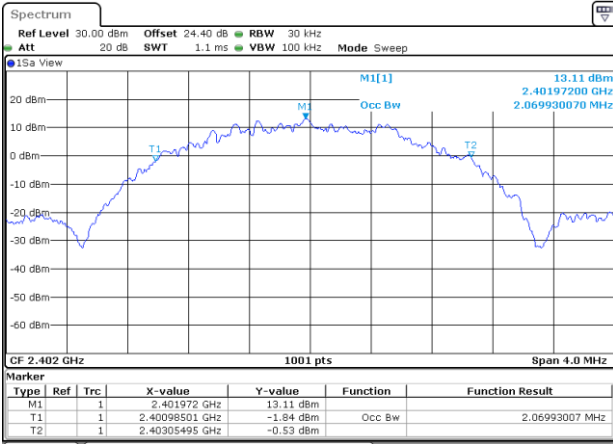


Date: 24.JUL.2023 14:46:04

99% Occupied Plot Bandwidth on Channel 19

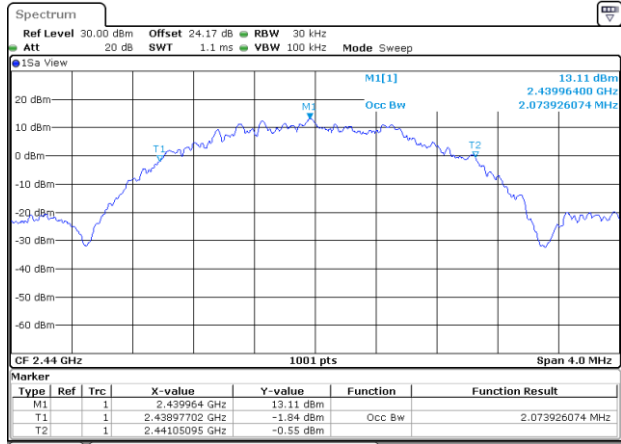

Date: 24.JUL.2023 14:29:49

99% Occupied Bandwidth Plot on Channel 39

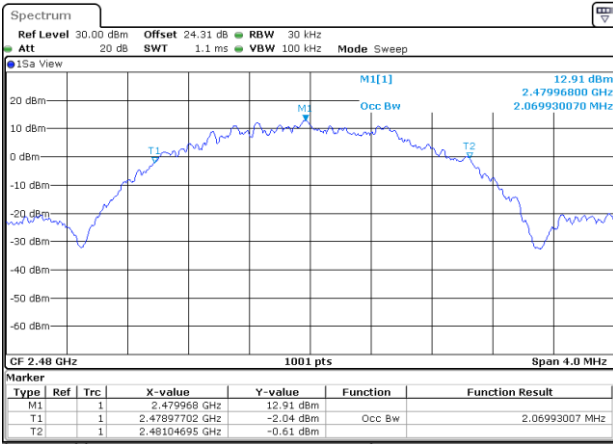


Date: 24.JUL.2023 14:53:04




Power Spectral Density (dBm/3kHz)

<1Mbps>


Power Density (dBm/3kHz) Plot Channel 00

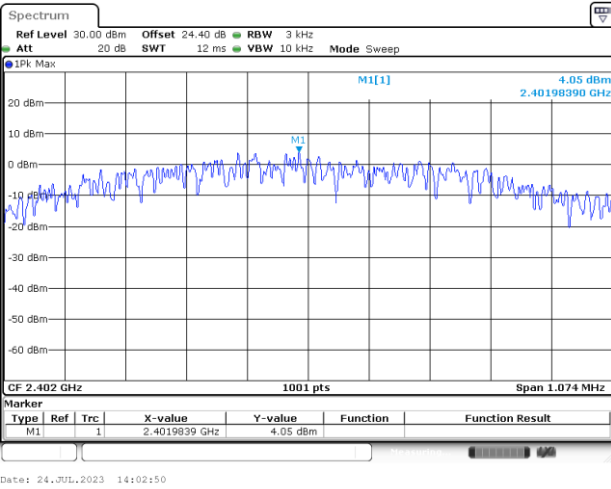

Power Density (dBm/3kHz) Plot Channel 19

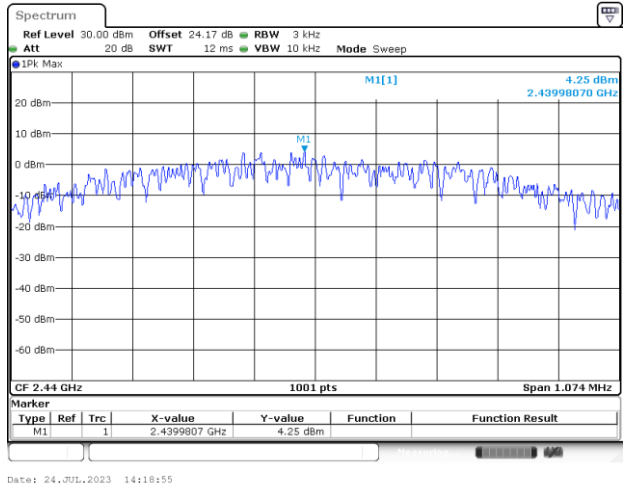

Power Density (dBm/3kHz) Plot Channel 39


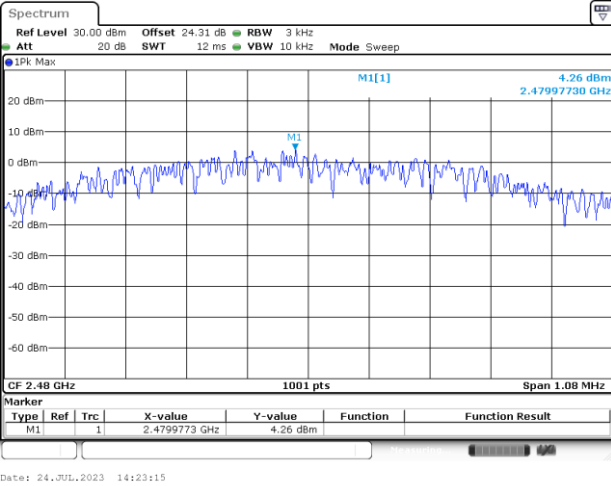





<2Mbps>

Power Density (dBm/3kHz) Plot Channel 00

Power Density (dBm/3kHz) Plot Channel 19

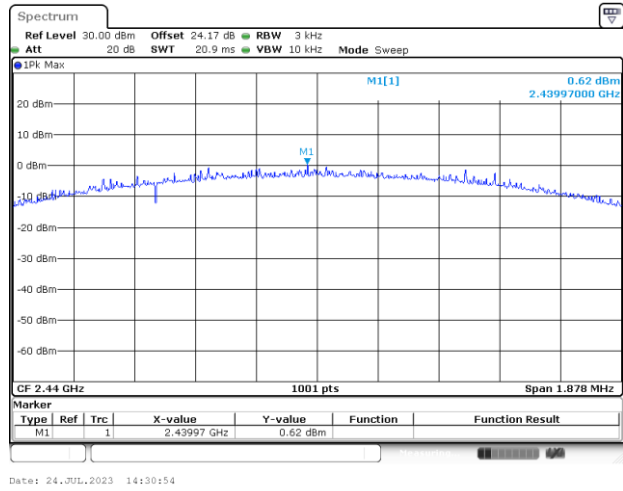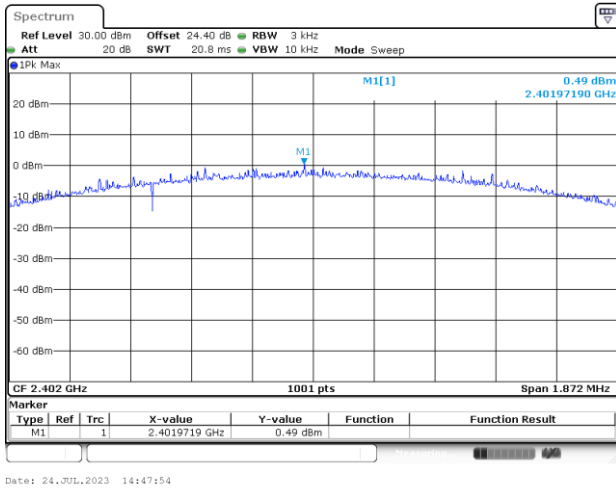

Power Density (dBm/3kHz) Plot Channel 39

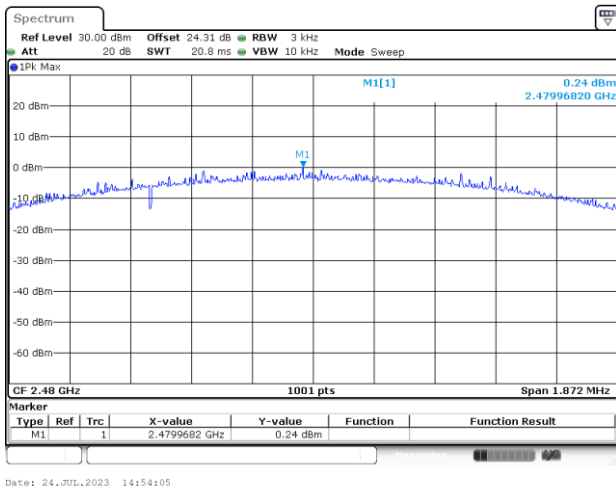





Band Edge and Spurious Emission

<1Mbps> Channel 00


100kHz PSD reference Level Plot

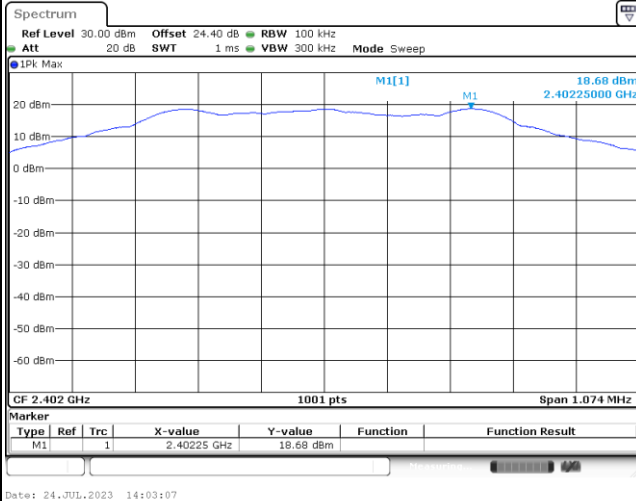


Low Channel Plot

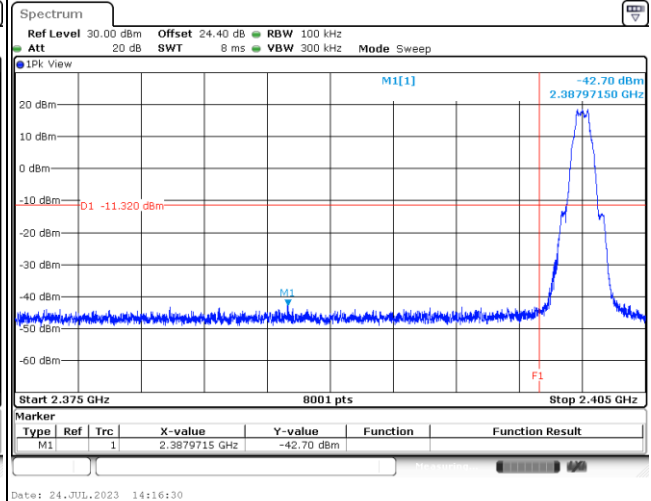

Spurious Emission 30MHz~1GHz Plot

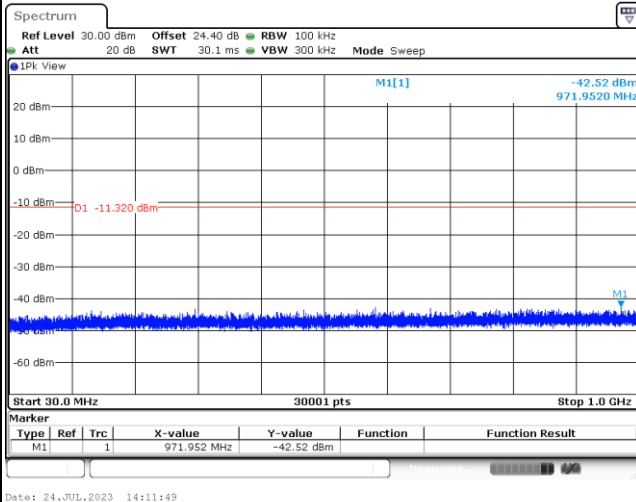


Spurious Emission 1GHz~26.5GHz Plot

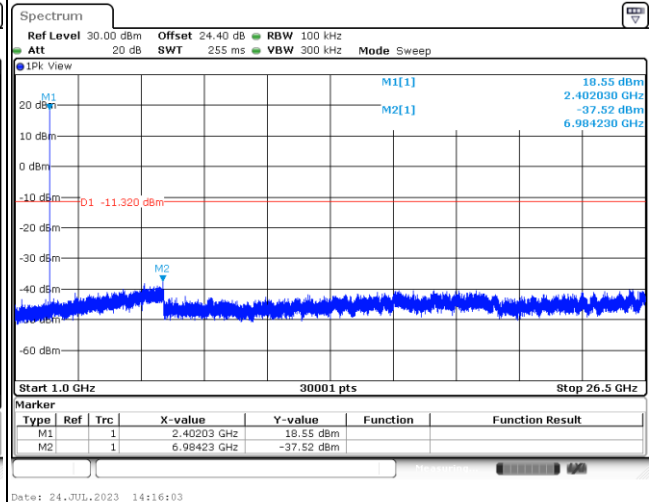




<1Mbps> Channel 19

100kHz PSD reference Level Plot

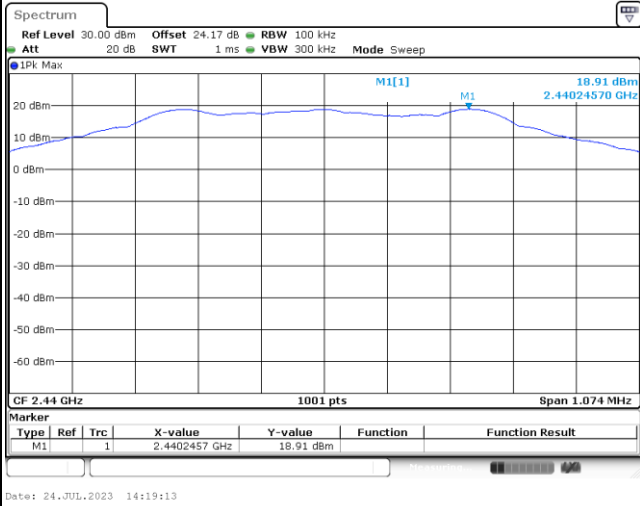


Mid Channel Plot

Spurious Emission 30MHz~1GHz Plot

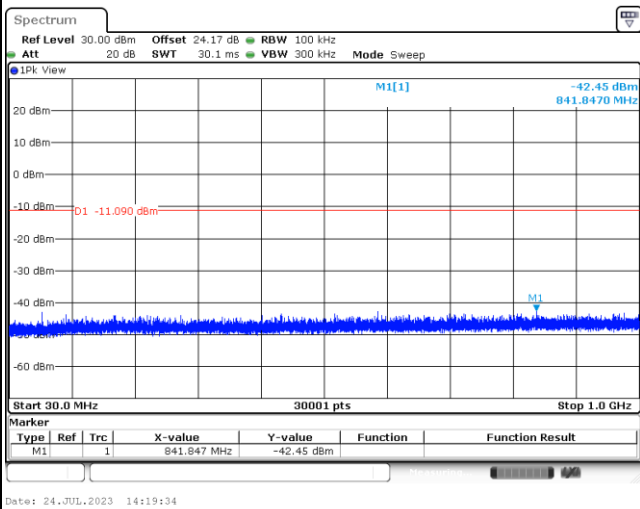


Spurious Emission 1GHz~26.5GHz Plot

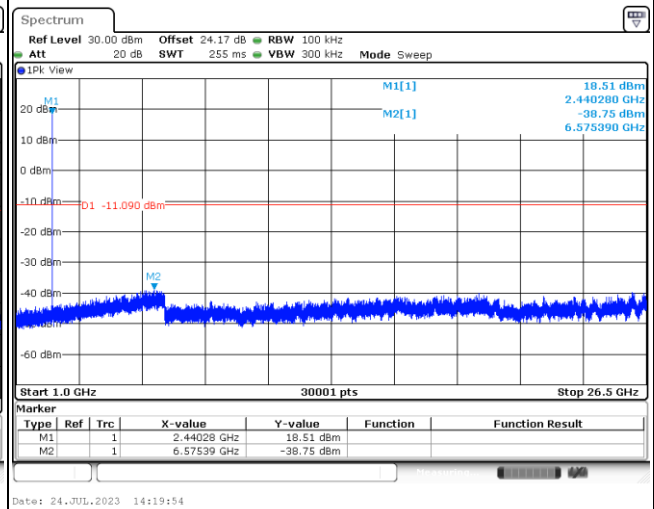




<1Mbps> Channel 39


100kHz PSD reference Level Plot

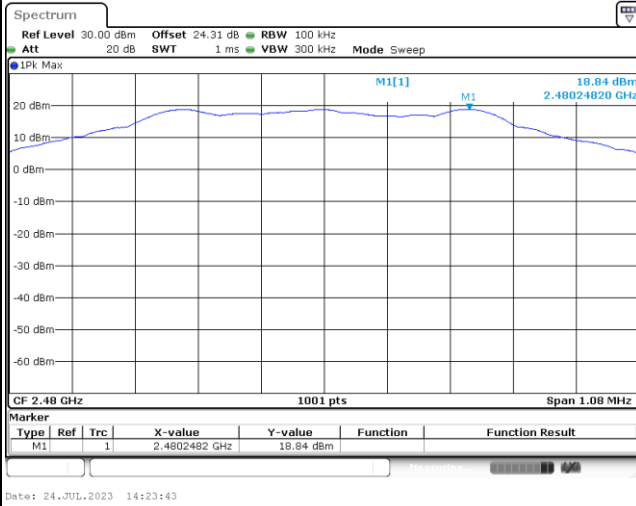


High Channel Plot

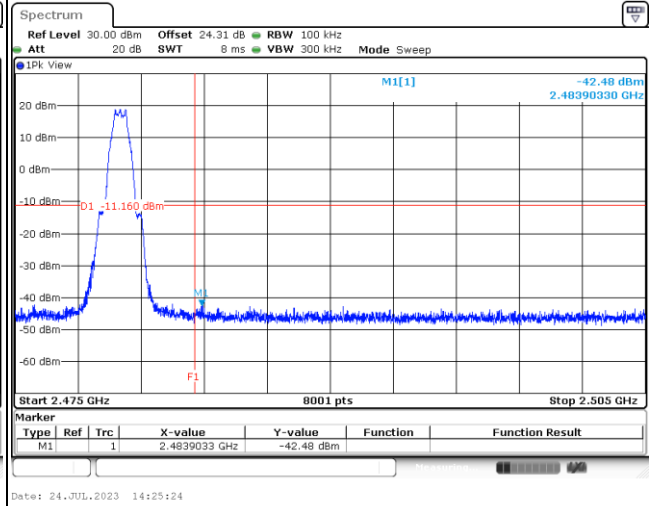

Spurious Emission 30MHz~1GHz Plot

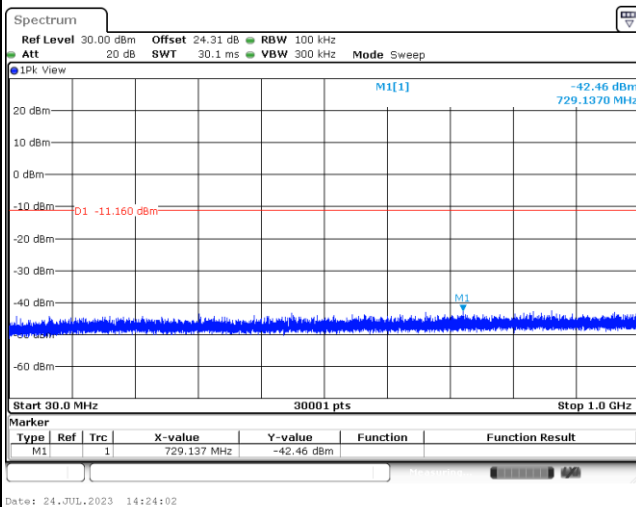


Spurious Emission 1GHz~26.5GHz Plot

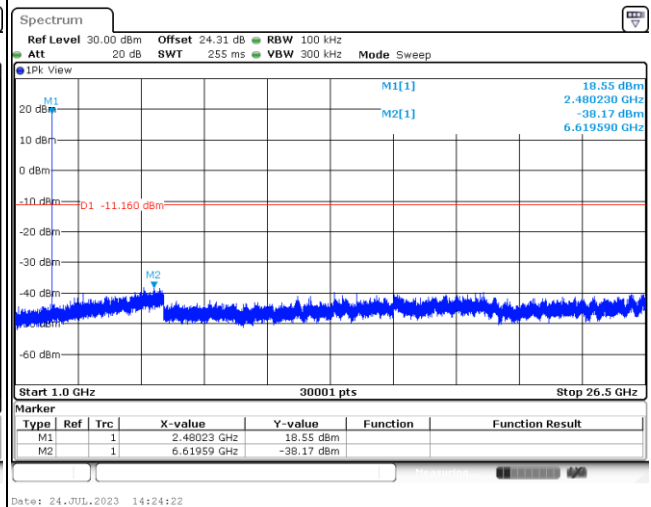




<2Mbps> Channel 00


100kHz PSD reference Level Plot

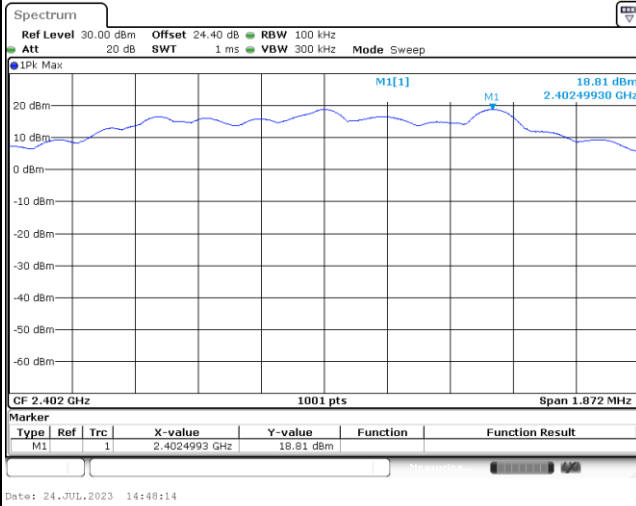


Low Channel Plot

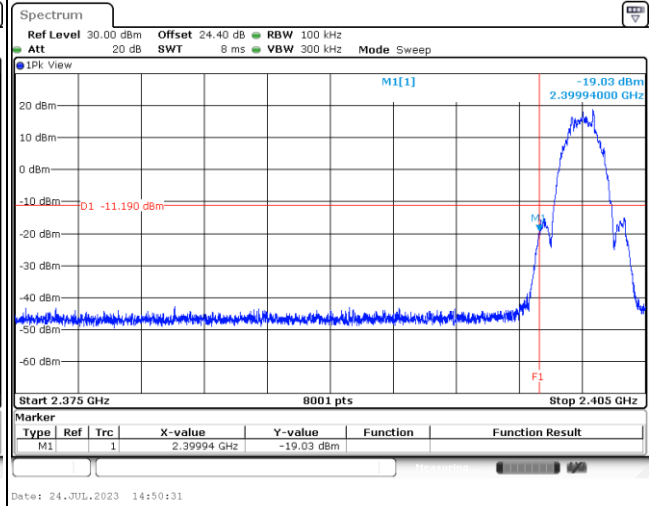

Spurious Emission 30MHz~1GHz Plot

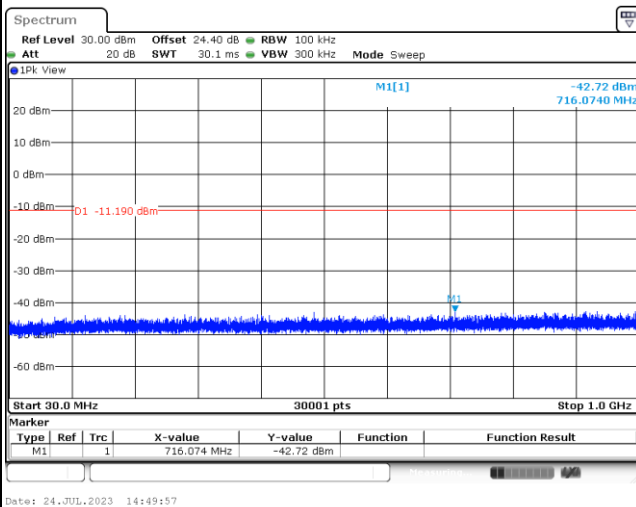

Spurious Emission 1GHz~26.5GHz Plot

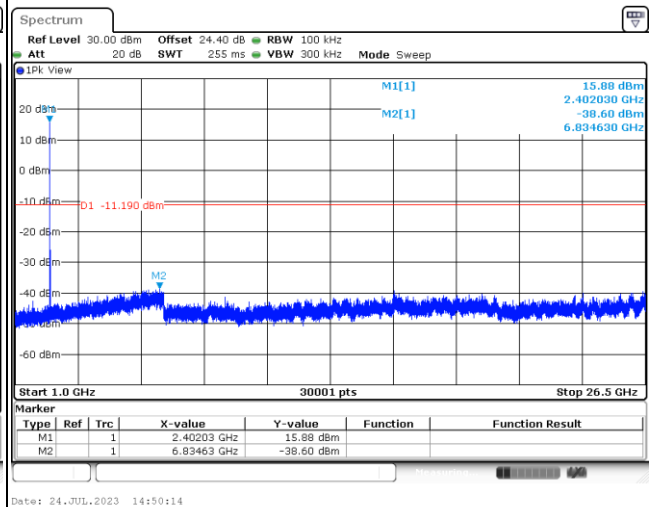




<2Mbps> Channel 19



100kHz PSD reference Level Plot

Mid Channel Plot

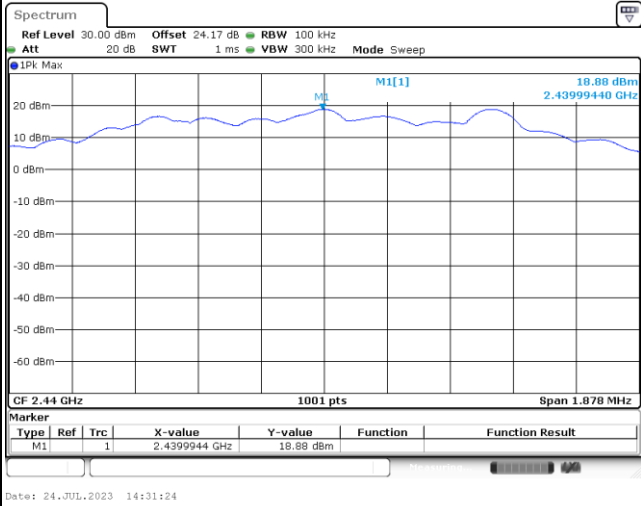

Spurious Emission 30MHz~1GHz Plot


Spurious Emission 1GHz~26.5GHz Plot

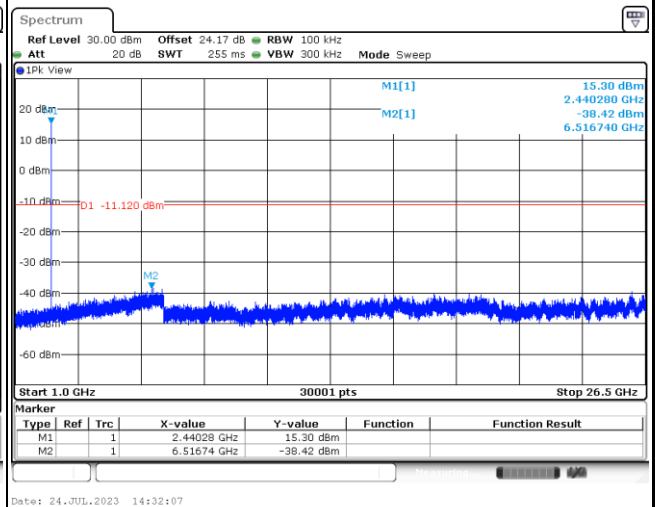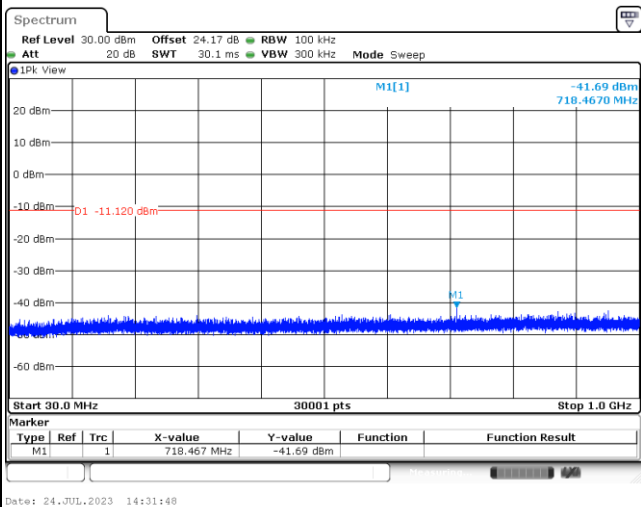




<2Mbps> Channel 39


100kHz PSD reference Level Plot

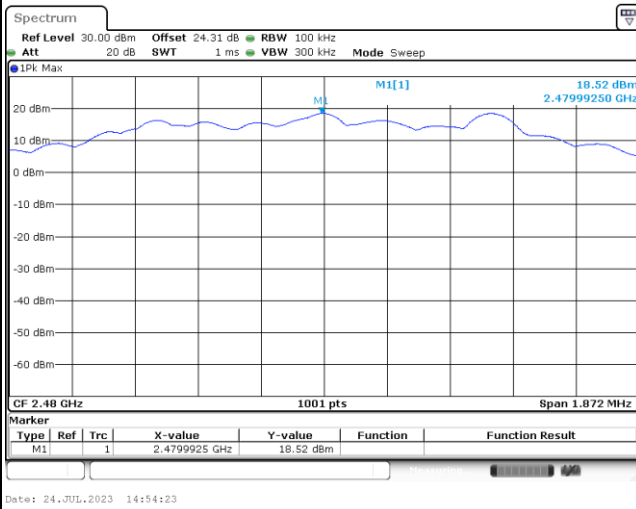


High Channel Plot

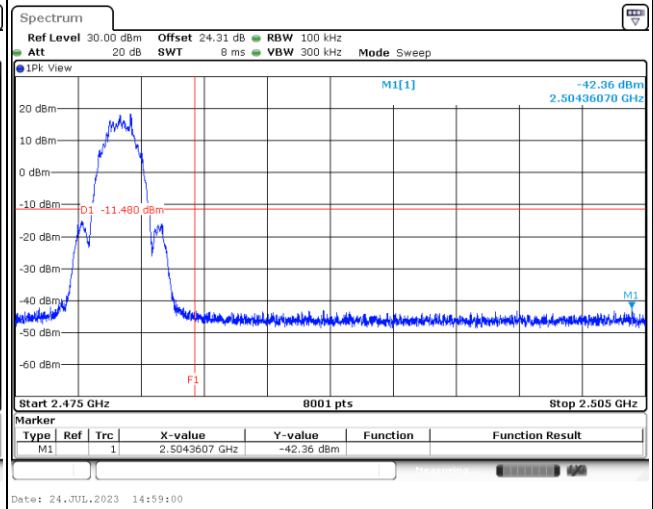

Spurious Emission 30MHz~1GHz Plot

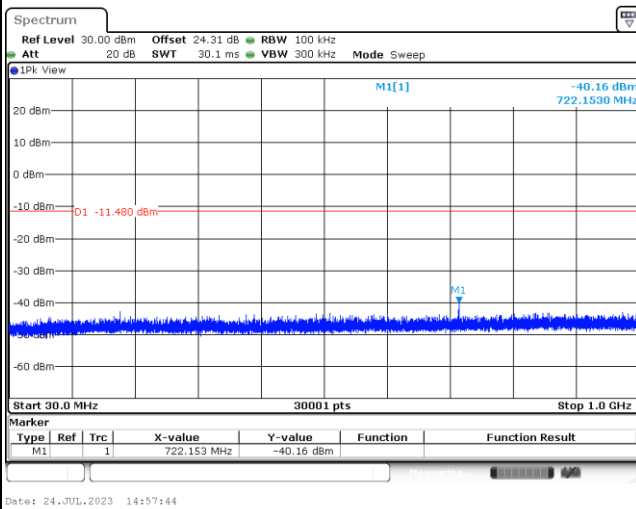

Spurious Emission 1GHz~26.5GHz Plot

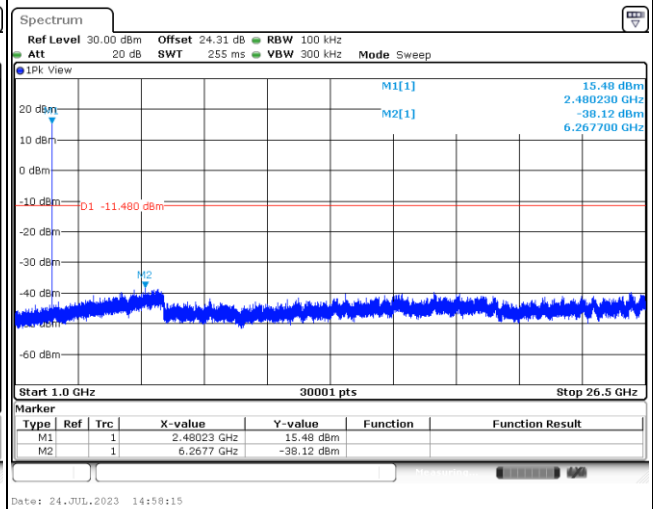





6dB Bandwidth

<HR 4Mbps>


6 dB Bandwidth Plot on Channel 02

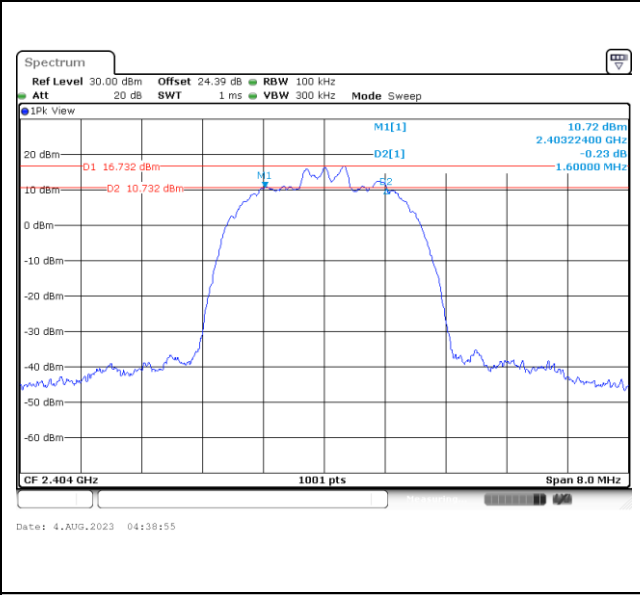

6 dB Bandwidth Plot on Channel 39

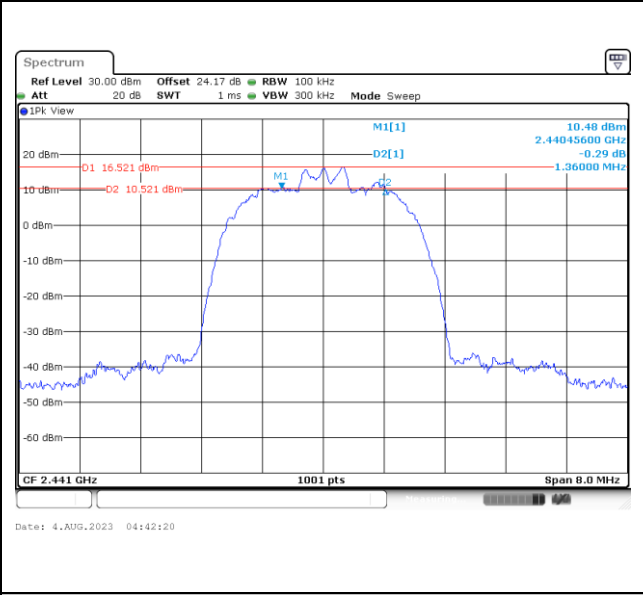


6 dB Bandwidth Plot on Channel 76

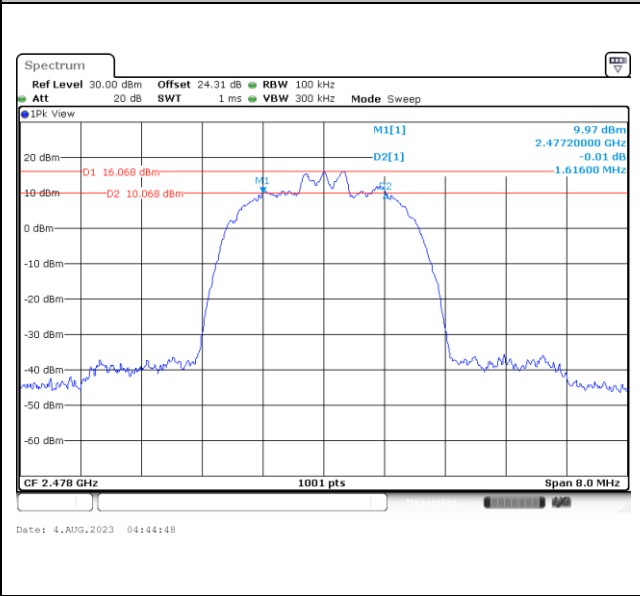




< HR 8Mbps >


6 dB Bandwidth Plot on Channel 20

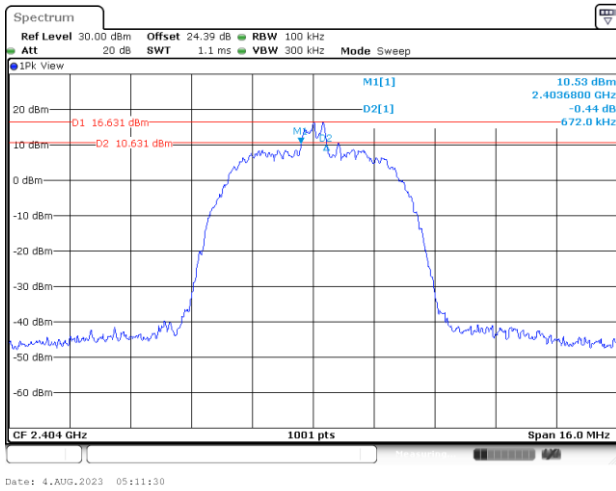

6 dB Bandwidth Plot on Channel 39

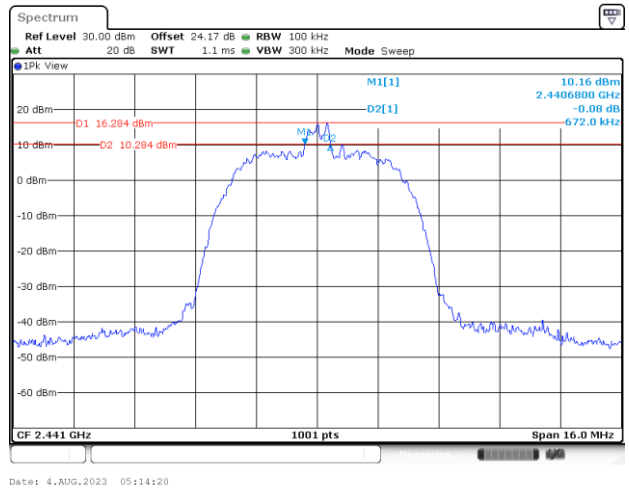

6 dB Bandwidth Plot on Channel 76

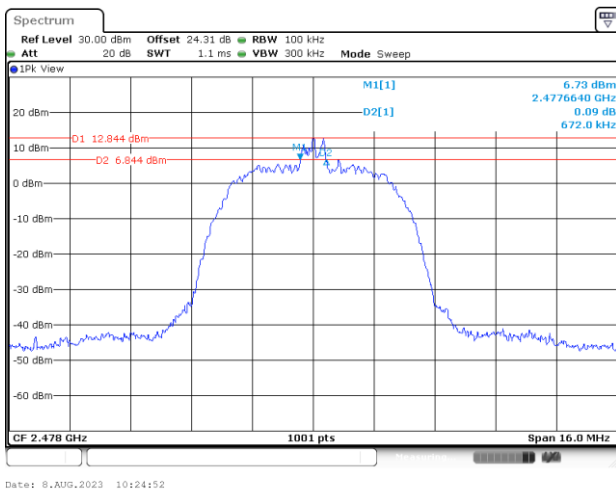




99% Occupied Bandwidth


< HR 4Mbps >

99% Occupied Bandwidth Plot on Channel 02

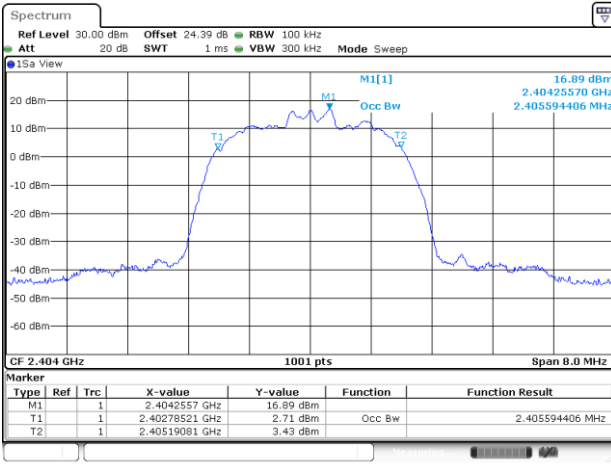


Date: 4.AUG.2023 04:38:28

99% Occupied Plot Bandwidth on Channel 39

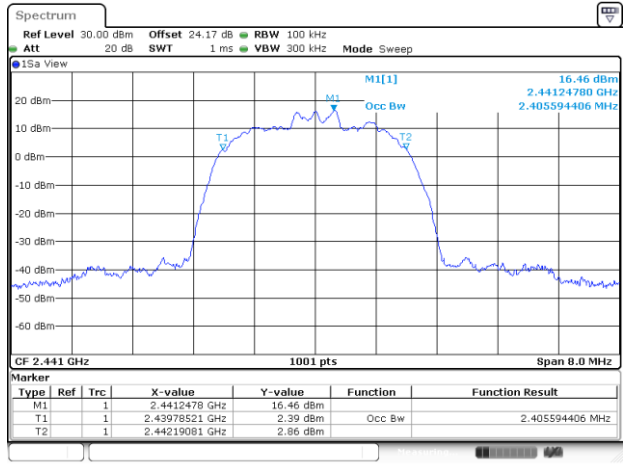

Date: 4.AUG.2023 04:41:54

99% Occupied Bandwidth Plot on Channel 76

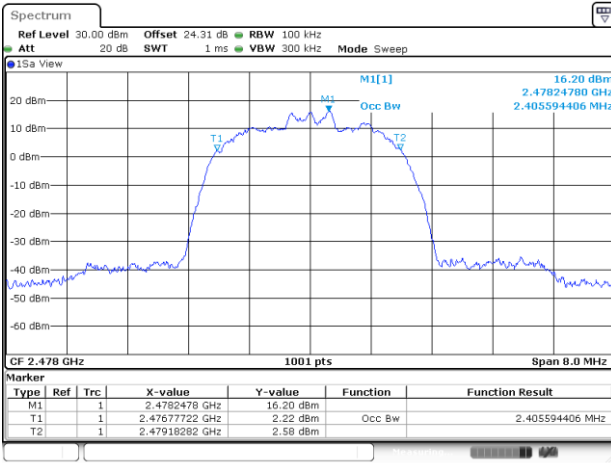


Date: 4.AUG.2023 04:44:33

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.




< HR 8Mbps >


99% Occupied Bandwidth Plot on Channel 02

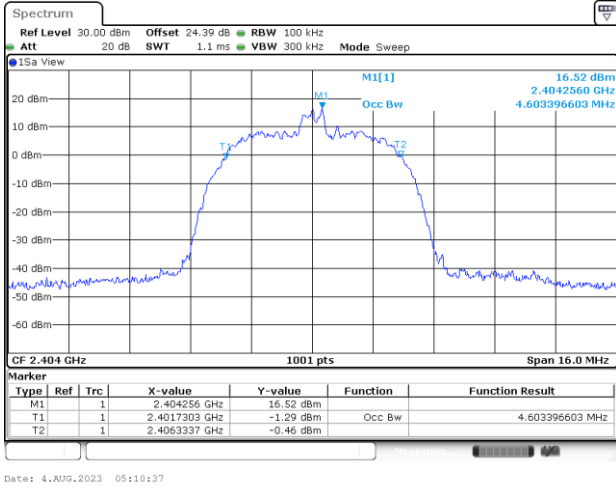

99% Occupied Plot Bandwidth on Channel 39

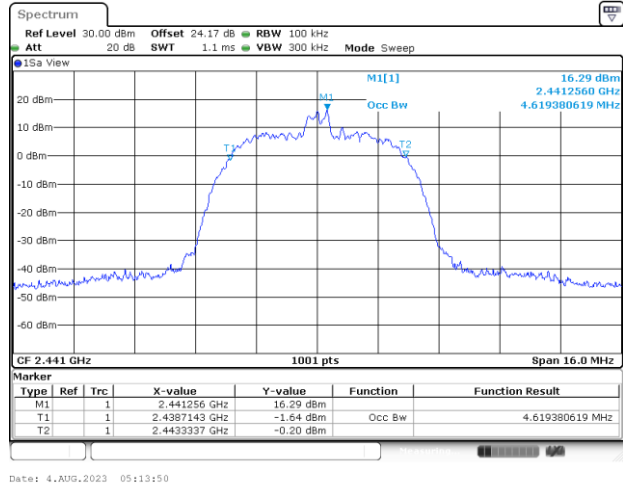

99% Occupied Bandwidth Plot on Channel 76

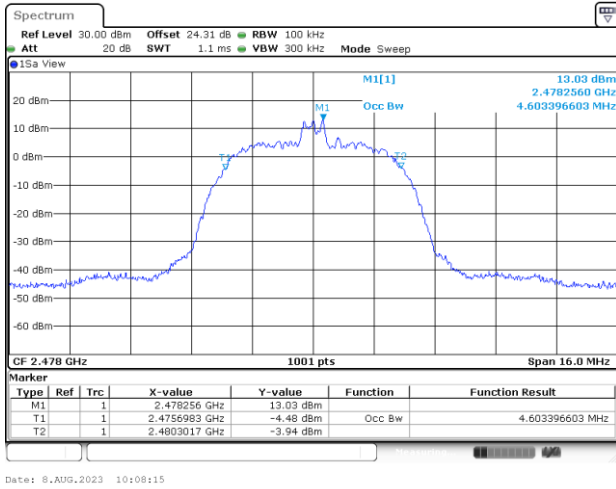





Power Spectral Density (dBm/3kHz)

< HR 4Mbps >


Power Density (dBm/3kHz) Plot Channel 02

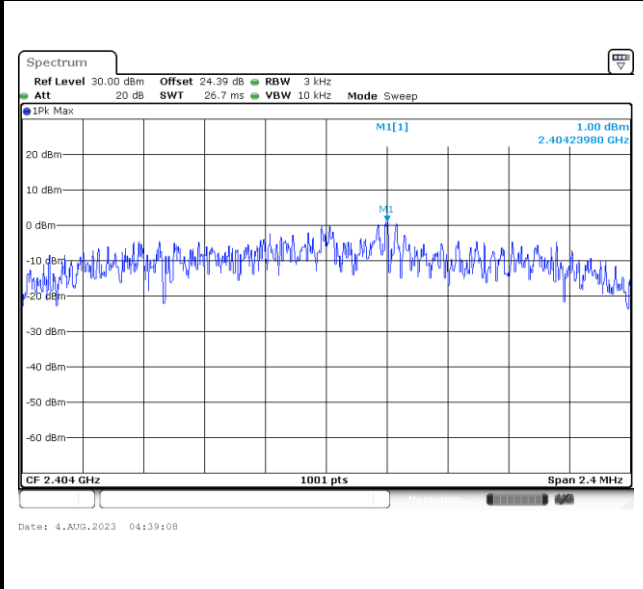

Power Density (dBm/3kHz) Plot Channel 39

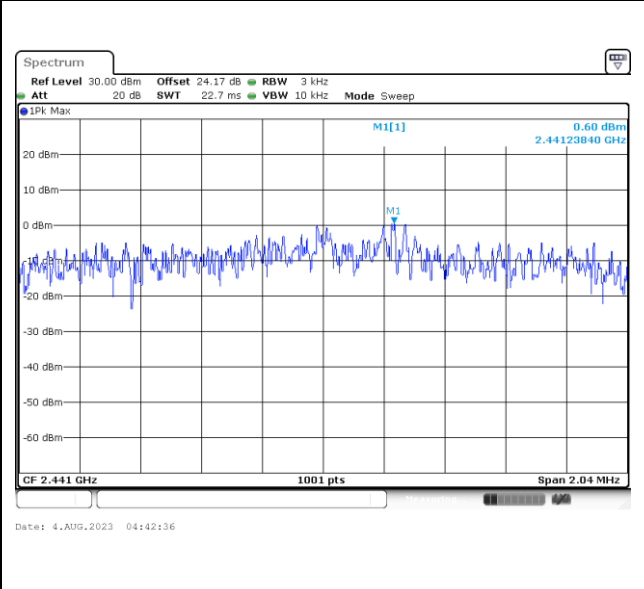


Power Density (dBm/3kHz) Plot Channel 76

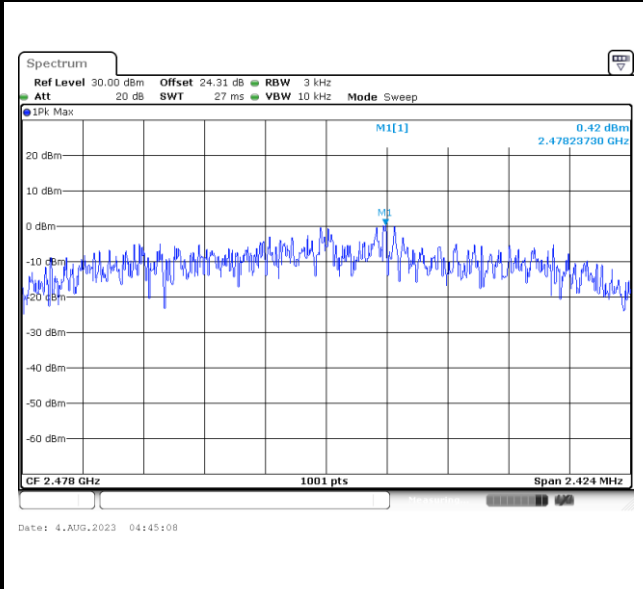




< HR 8Mbps >


Power Density (dBm/3kHz) Plot Channel 02

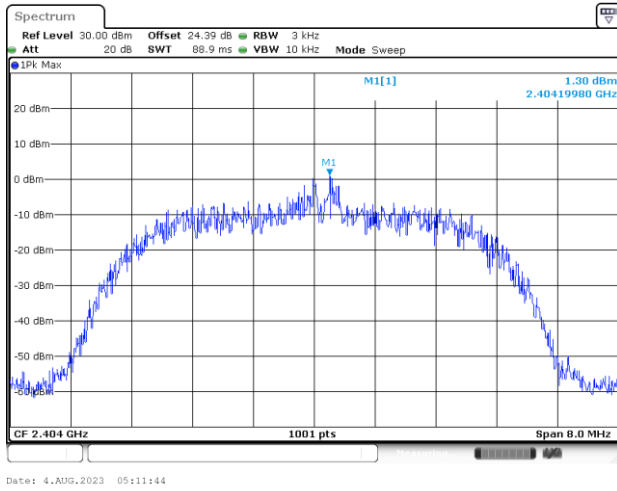

Power Density (dBm/3kHz) Plot Channel 39

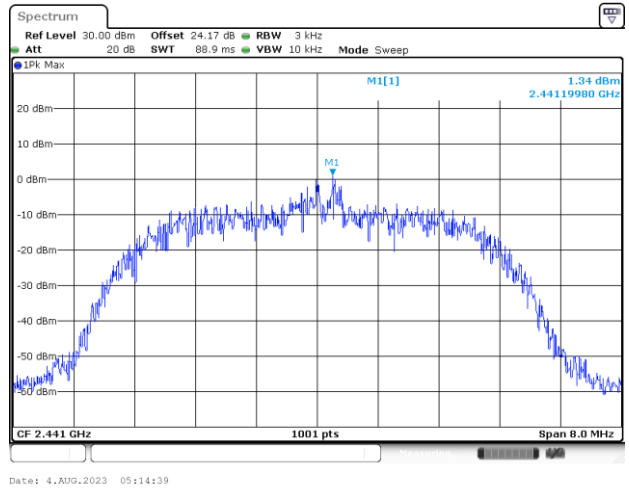


Power Density (dBm/3kHz) Plot Channel 76

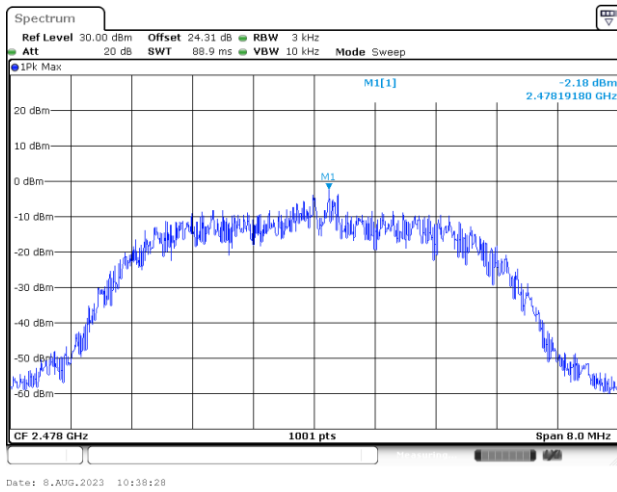




Band Edge and Spurious Emission

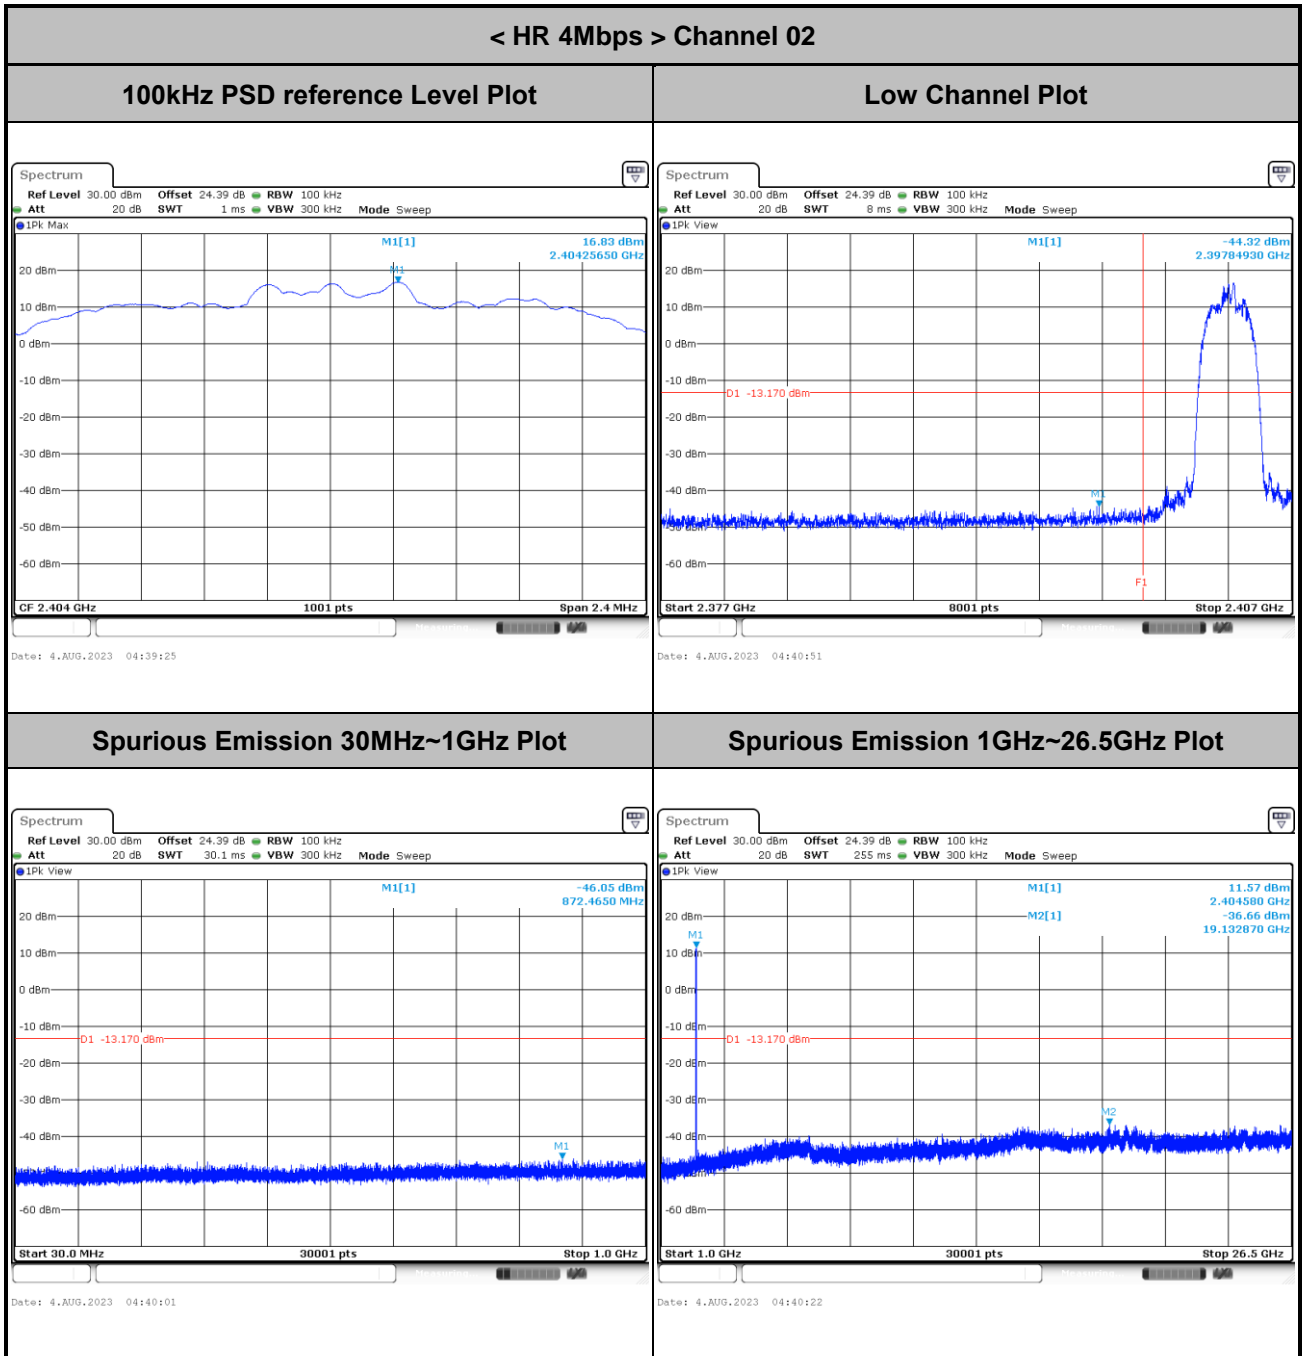




< HR 4Mbps > Channel 39

100kHz PSD reference Level Plot

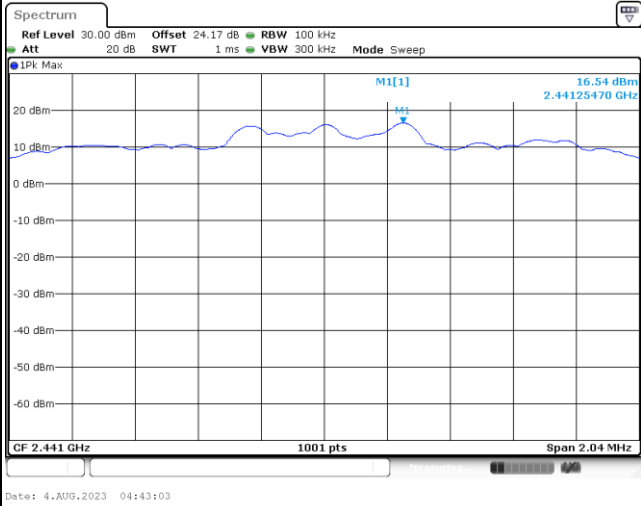


Mid Channel Plot

Spurious Emission 30MHz~1GHz Plot

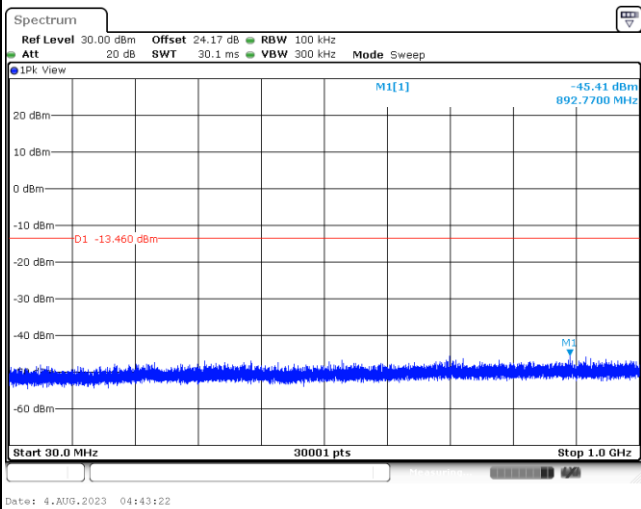


Spurious Emission 1GHz~26.5GHz Plot

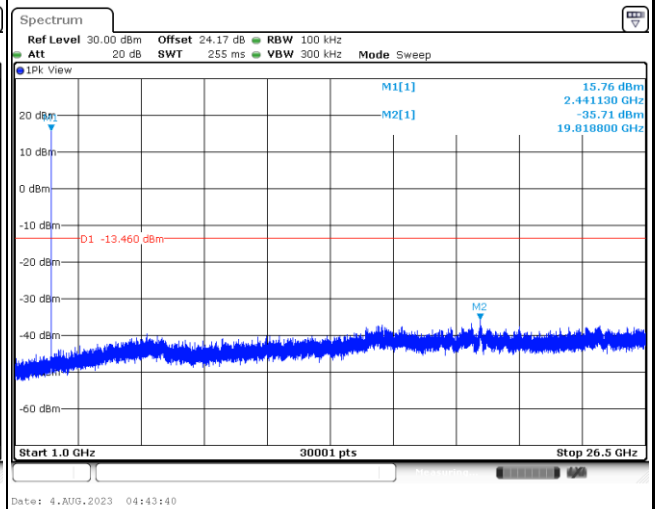




< HR 4Mbps > Channel 76

100kHz PSD reference Level Plot

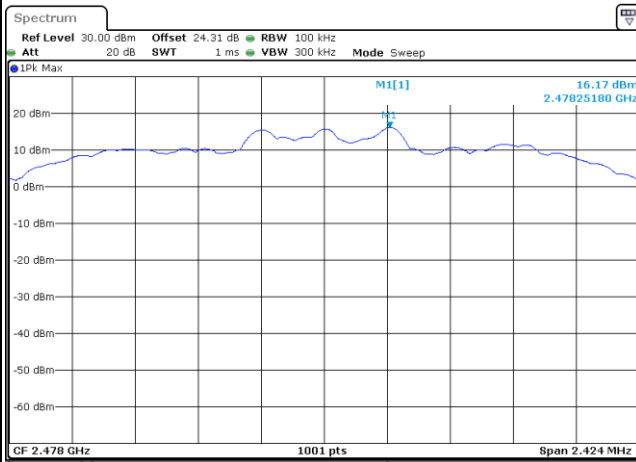


Date: 4.AUG.2023 04:45:27

High Channel Plot

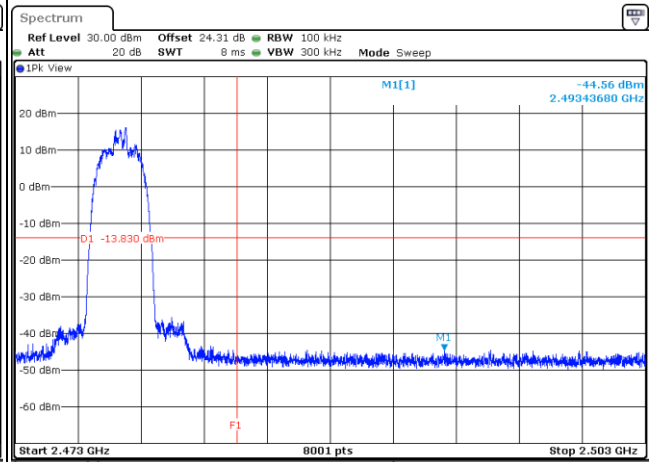


Date: 4.AUG.2023 04:46:41

Spurious Emission 30MHz~1GHz Plot

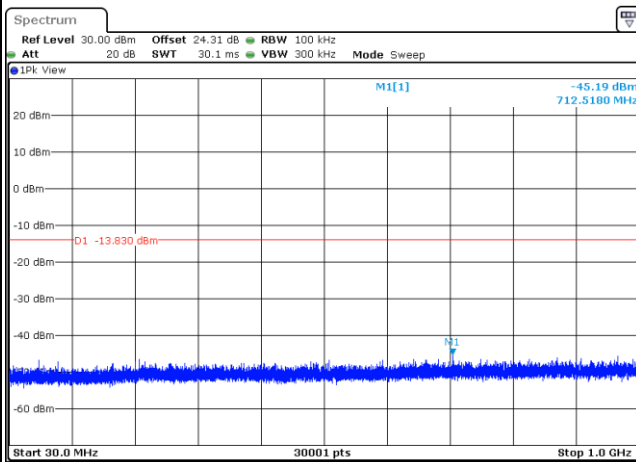

Date: 4.AUG.2023 04:45:55

Spurious Emission 1GHz~26.5GHz Plot

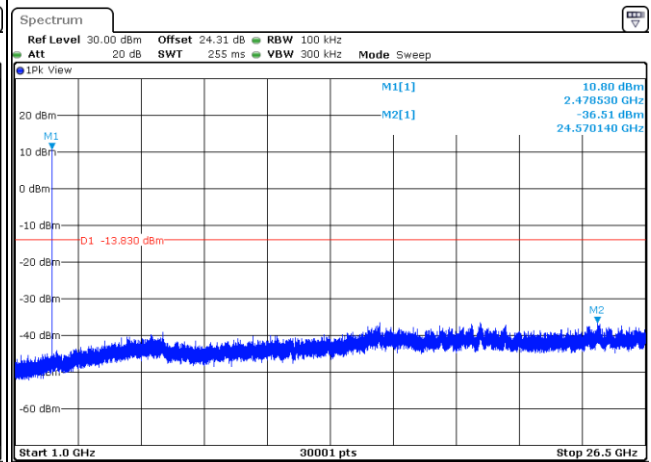


Date: 4.AUG.2023 04:46:15




< HR 8Mbps > Channel 02


100kHz PSD reference Level Plot

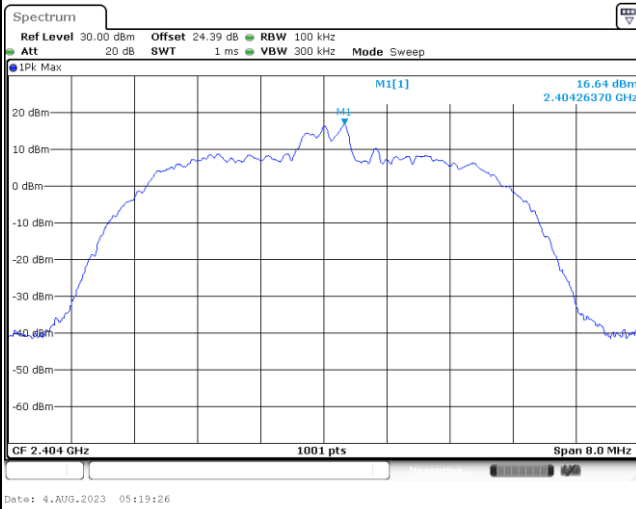


Low Channel Plot

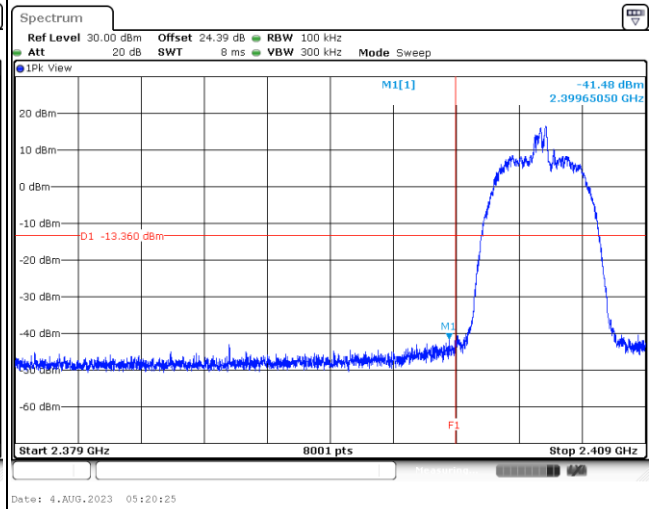

Spurious Emission 30MHz~1GHz Plot

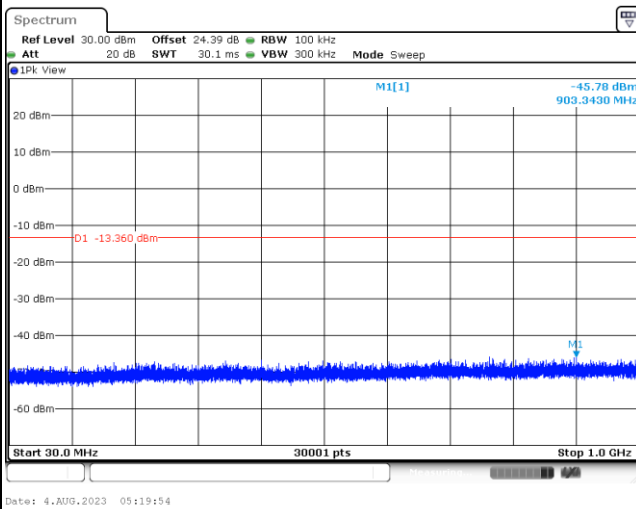


Spurious Emission 1GHz~26.5GHz Plot

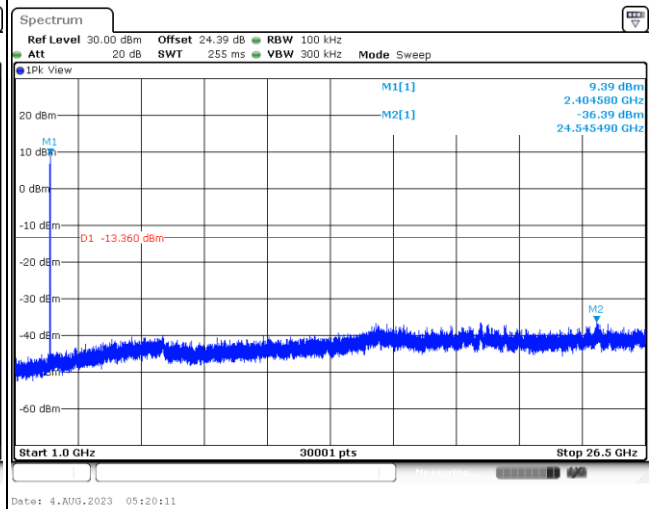




< HR 8Mbps > Channel 39

100kHz PSD reference Level Plot

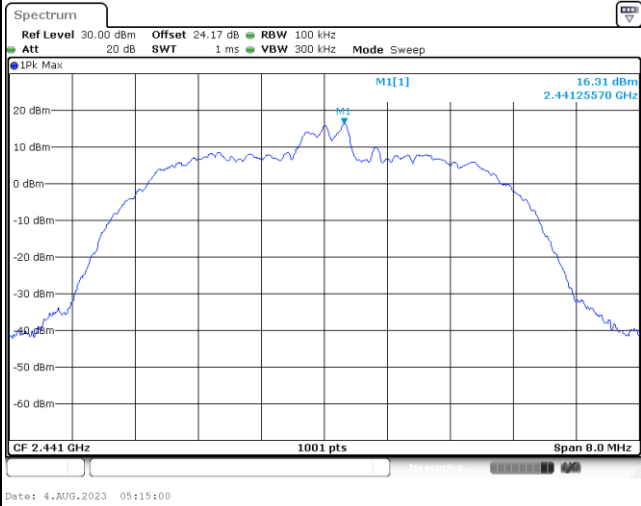


Mid Channel Plot

Spurious Emission 30MHz~1GHz Plot

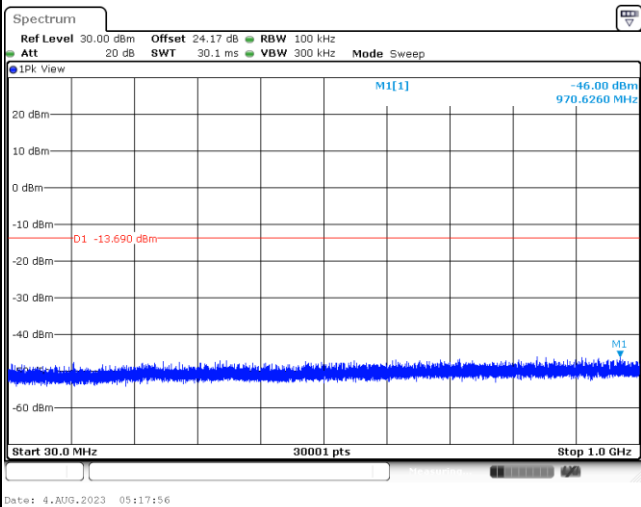


Spurious Emission 1GHz~26.5GHz Plot

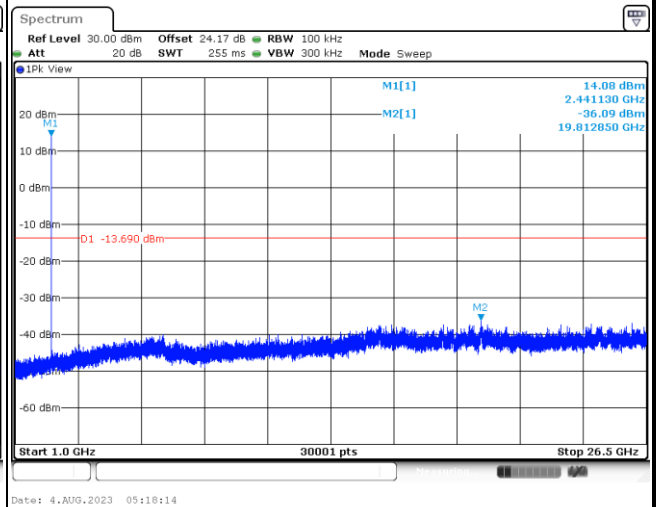




< HR 8Mbps > Channel 76


100kHz PSD reference Level Plot

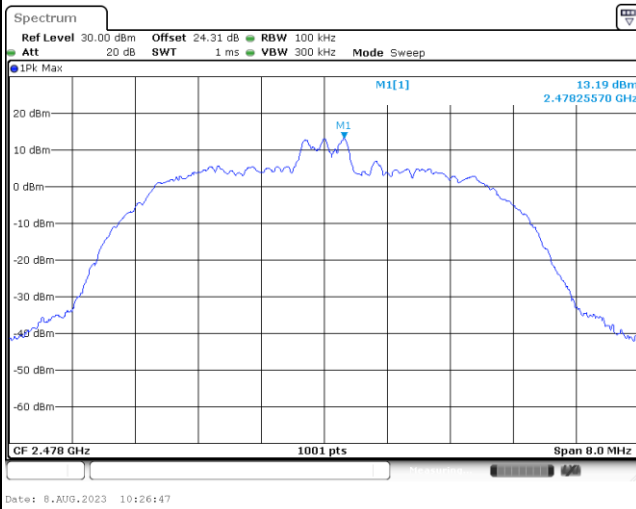


High Channel Plot

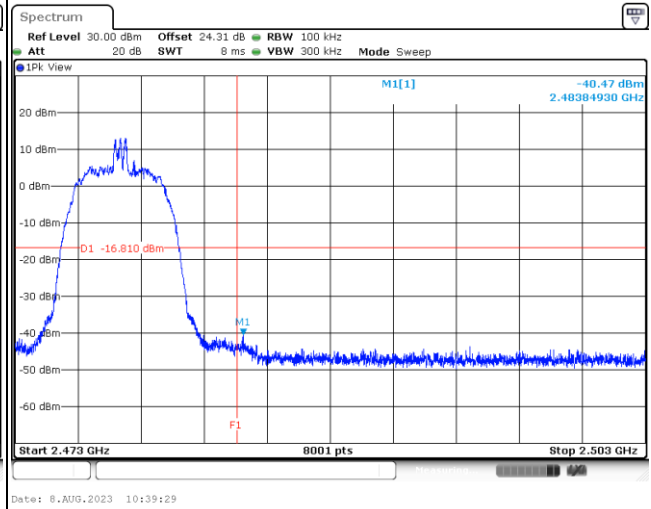

Spurious Emission 30MHz~1GHz Plot

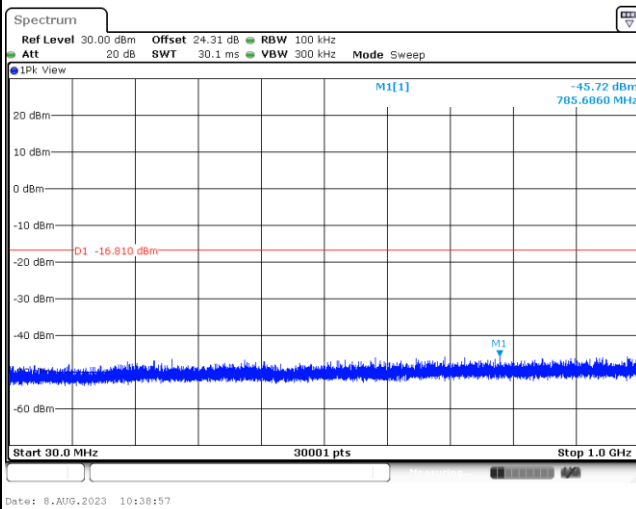

Spurious Emission 1GHz~26.5GHz Plot

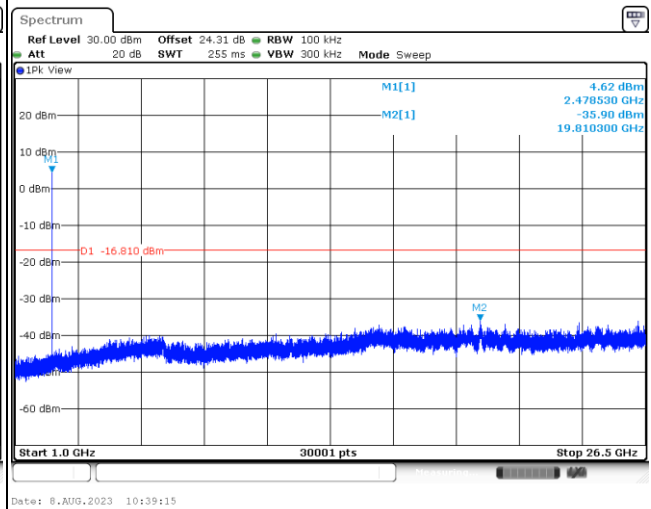




<Ant. 4>


6dB Bandwidth

<1Mbps>


6 dB Bandwidth Plot on Channel 00

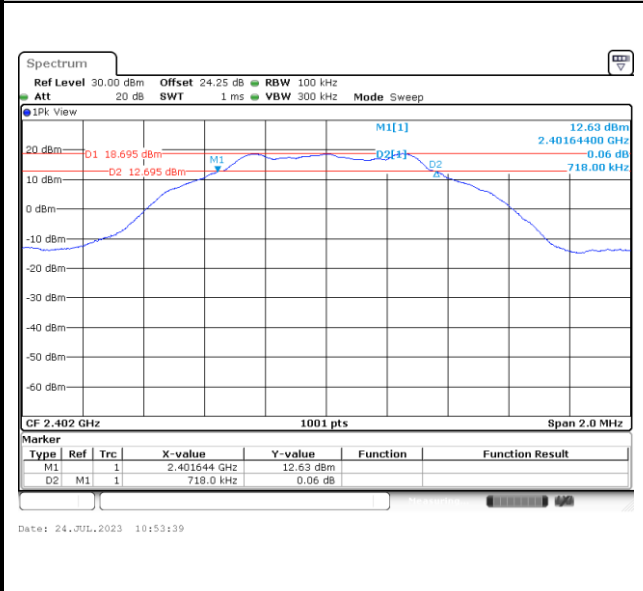

6 dB Bandwidth Plot on Channel 19

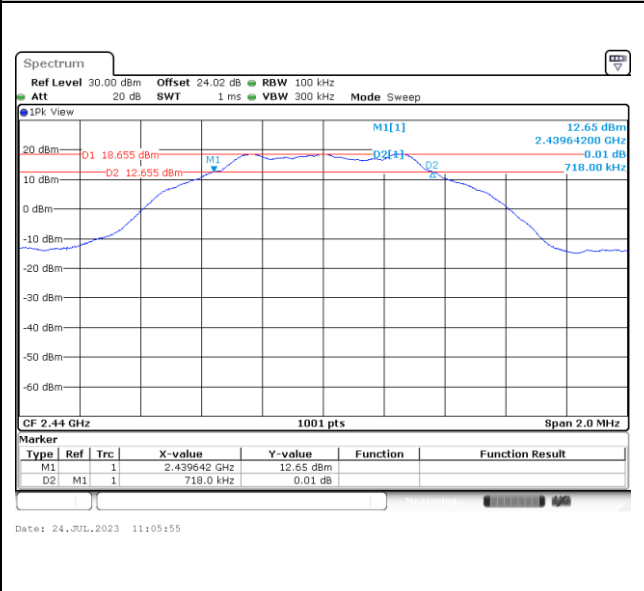


6 dB Bandwidth Plot on Channel 39

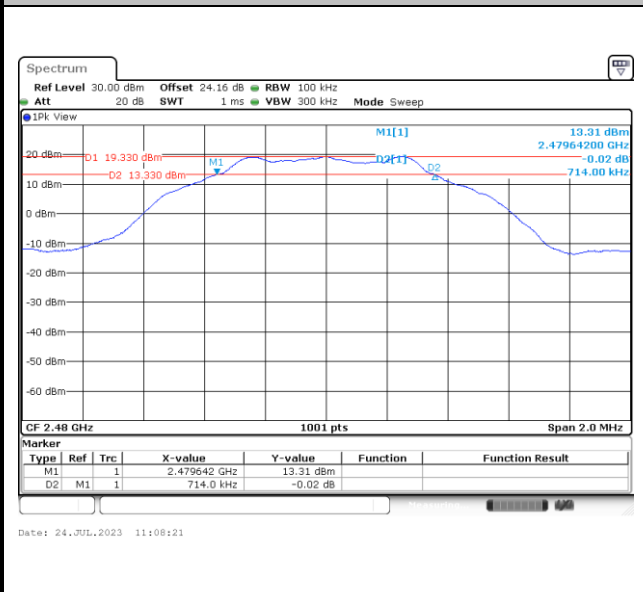




<2Mbps>


6 dB Bandwidth Plot on Channel 00

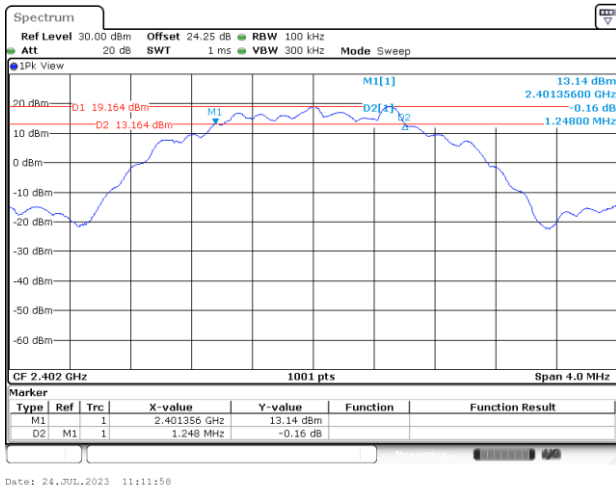

6 dB Bandwidth Plot on Channel 19

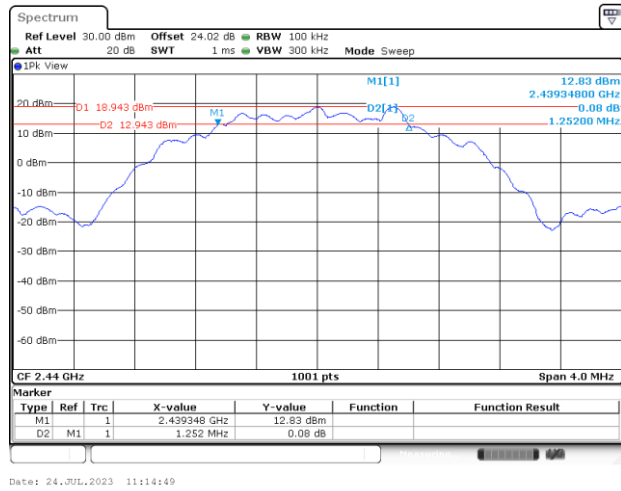

6 dB Bandwidth Plot on Channel 39

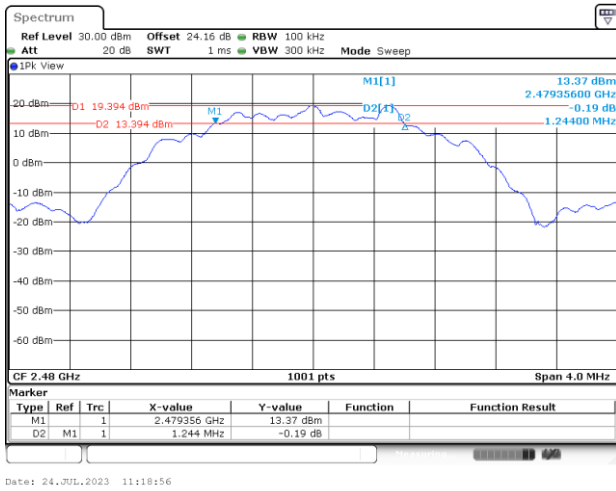




99% Occupied Bandwidth


<1Mbps>

99% Occupied Bandwidth Plot on Channel 00

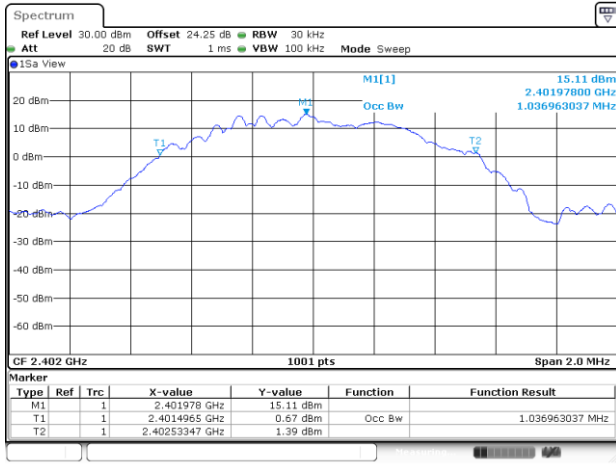


Date: 24.JUL.2023 10:52:41

99% Occupied Plot Bandwidth on Channel 19

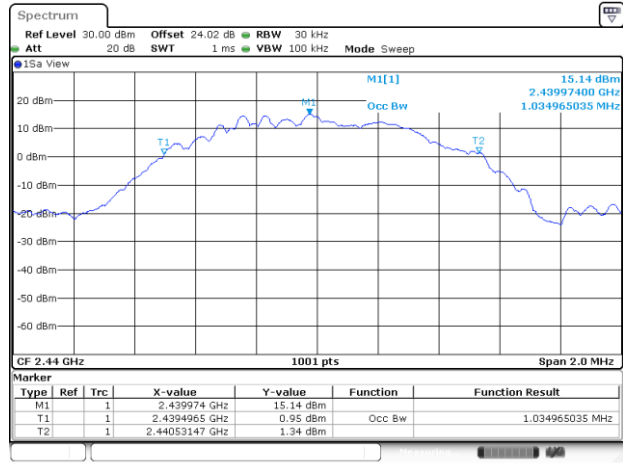

Date: 24.JUL.2023 11:05:35

99% Occupied Bandwidth Plot on Channel 39

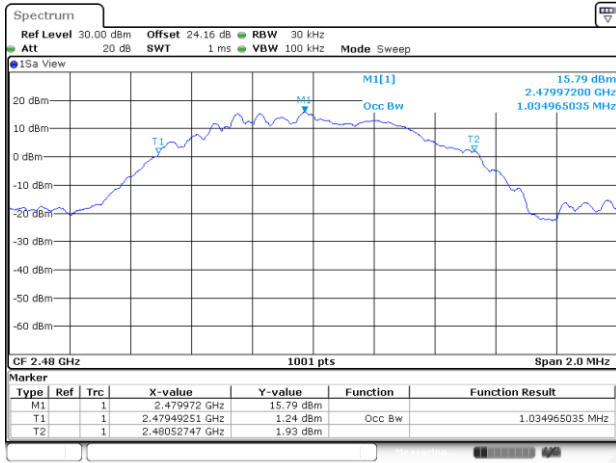


Date: 24.JUL.2023 11:08:07

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.




<2Mbps>

99% Occupied Bandwidth Plot on Channel 00

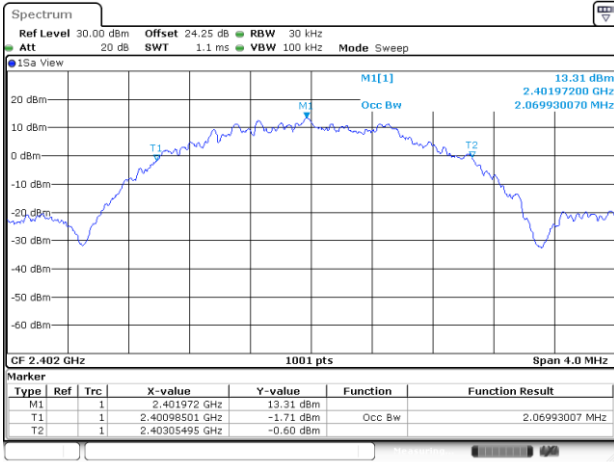


Date: 24.JUL.2023 11:11:14

99% Occupied Plot Bandwidth on Channel 19

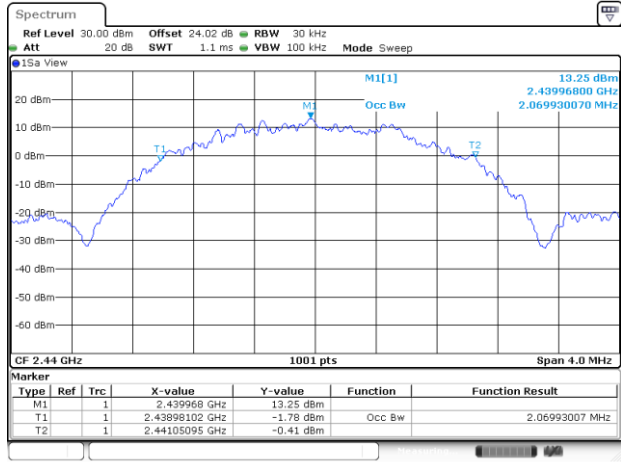

Date: 24.JUL.2023 11:14:36

99% Occupied Bandwidth Plot on Channel 39

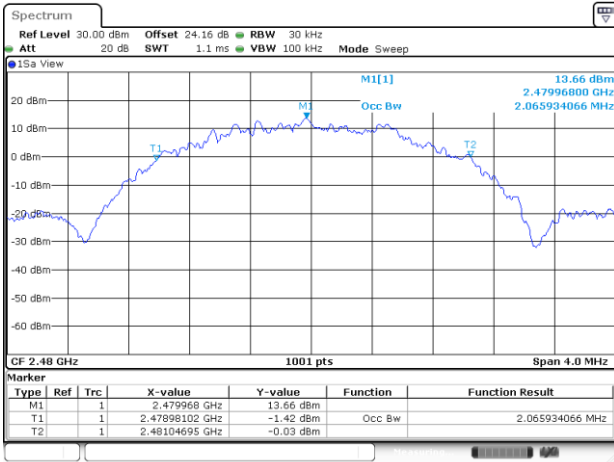


Date: 24.JUL.2023 11:18:39



Power Spectral Density (dBm/3kHz)


<1Mbps>

Power Density (dBm/3kHz) Plot Channel 00

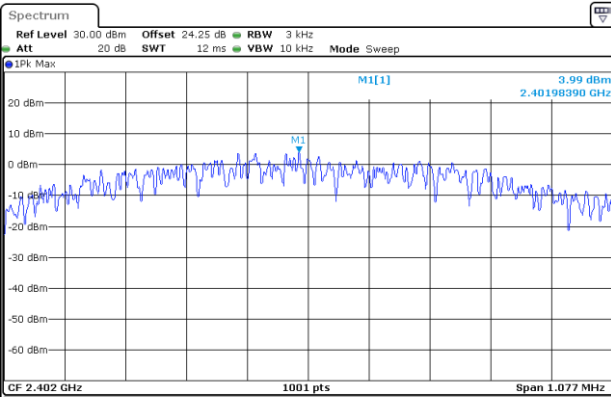


Date: 24.JUL.2023 10:54:39

Power Density (dBm/3kHz) Plot Channel 19

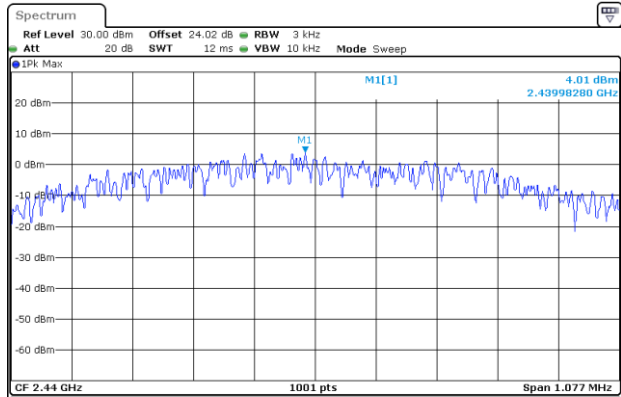

Date: 24.JUL.2023 11:06:09

Power Density (dBm/3kHz) Plot Channel 39

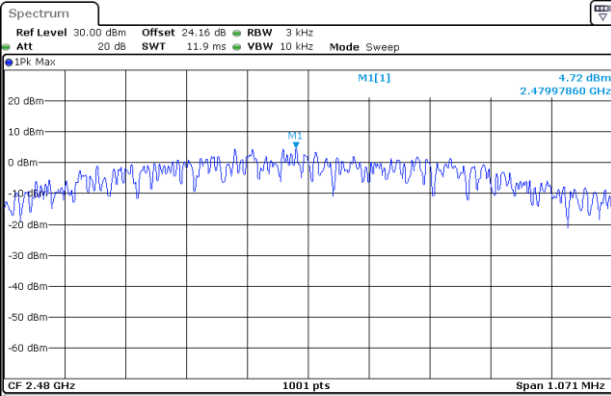



Date: 24.JUL.2023 11:08:33




<2Mbps>

Power Density (dBm/3kHz) Plot Channel 00

Power Density (dBm/3kHz) Plot Channel 19

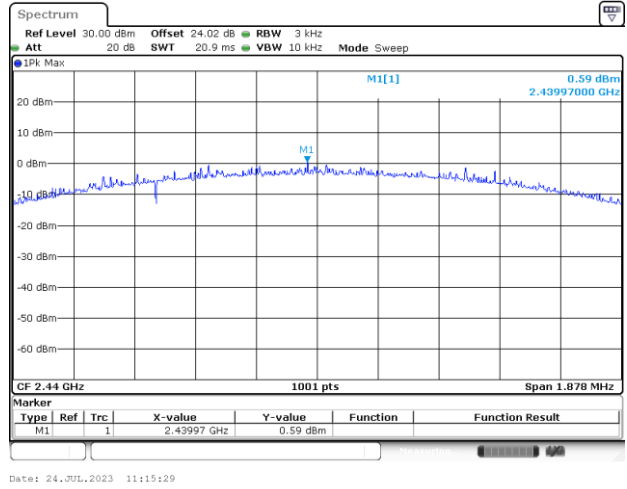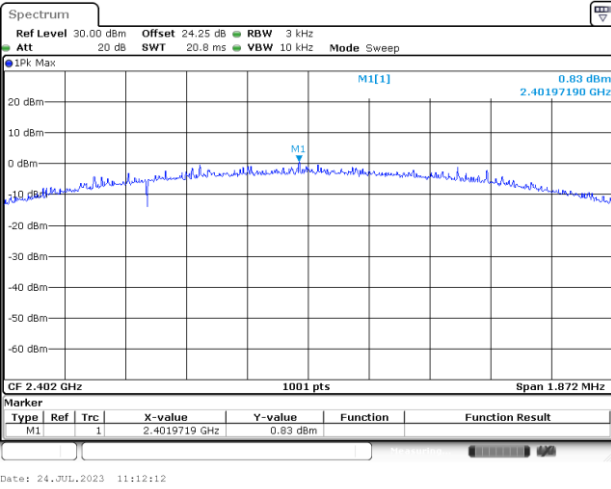

Power Density (dBm/3kHz) Plot Channel 39

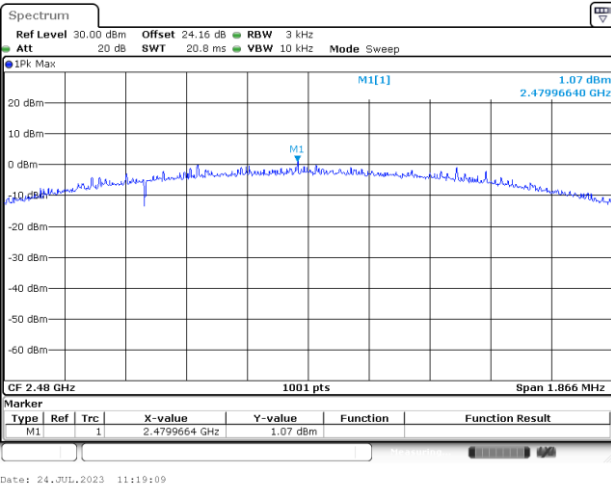





Band Edge and Spurious Emission

<1Mbps> Channel 00


100kHz PSD reference Level Plot

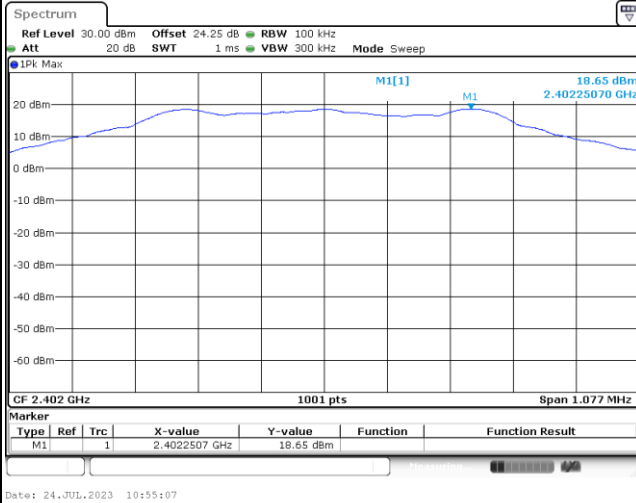

Low Channel Plot

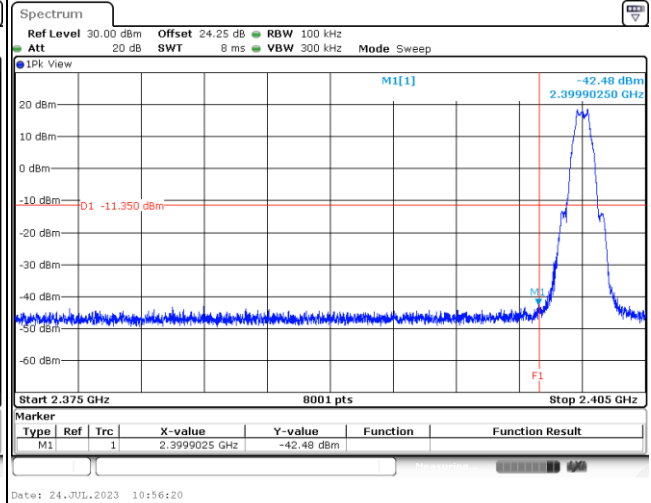

Spurious Emission 30MHz~1GHz Plot

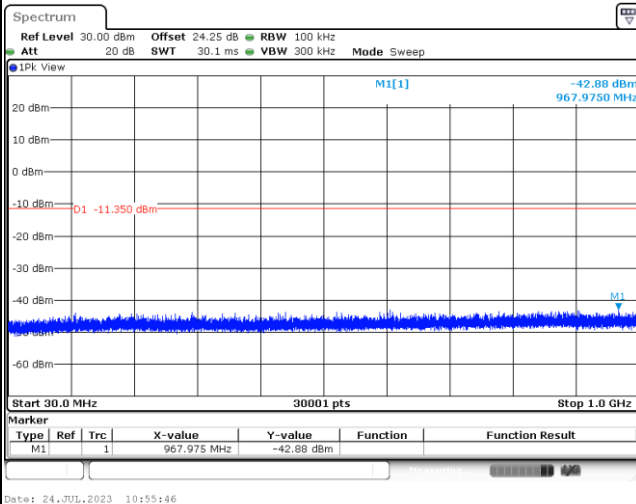

Spurious Emission 1GHz~26.5GHz Plot

