



# FCC RADIO TEST REPORT

**FCC ID** : A4RGC3VE  
**Equipment** : Phone  
**Model Name** : GC3VE  
**Applicant** : Google LLC  
1600 Amphitheatre Parkway,  
Mountain View, California, 94043 USA  
**Standard** : FCC Part 15 Subpart E §15.407

The product was received on Mar. 29, 2023 and testing was performed from Apr. 13, 2023 to Jun. 07, 2023. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.

*Louis Wu*

Approved by: Louis Wu

**Sporton International Inc. EMC & Wireless Communications Laboratory**

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)



## Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
<b>1 General Description .....</b>	<b>5</b>
1.1 Product Feature of Equipment Under Test.....	5
1.2 Product Specification of Equipment Under Test.....	6
1.3 Modification of EUT .....	10
1.4 Testing Location .....	10
1.5 Applicable Standards.....	10
<b>2 Test Configuration of Equipment Under Test .....</b>	<b>11</b>
2.1 Carrier Frequency and Channel .....	11
2.2 Test Mode.....	13
2.3 Connection Diagram of Test System.....	15
2.4 Support Unit used in test configuration and system .....	16
2.5 EUT Operation Test Setup .....	16
2.6 Measurement Results Explanation Example.....	17
<b>3 Test Result .....</b>	<b>18</b>
3.1 Emission Bandwidth and 99% Occupied Bandwidth Measurement.....	18
3.2 Maximum Conducted Output Power Measurement .....	25
3.3 Power Spectral Density Measurement .....	27
3.4 Unwanted Emissions Measurement.....	40
3.5 AC Conducted Emission Measurement.....	45
3.6 Antenna Requirements.....	47
<b>4 List of Measuring Equipment.....</b>	<b>48</b>
<b>5 Measurement Uncertainty .....</b>	<b>50</b>
<b>Appendix A. Conducted Test Results</b>	
<b>Appendix B. AC Conducted Emission Test Result</b>	
<b>Appendix C. Radiated Spurious Emission</b>	
<b>Appendix D. Radiated Spurious Emission Plots</b>	
<b>Appendix E. Duty Cycle Plots</b>	
<b>Appendix F. Setup Photographs</b>	



### History of this test report

Report No.	Version	Description	Issue Date
FR2D0206-03E	01	Initial issue of report	Jun. 29, 2023
FR2D0206-03E	02	Revise Appendix A, Appendix C and Appendix D This report is an updated version, replacing the report issued on Jun. 29, 2023.	Jul. 06, 2023



## Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.403	Emission Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Reporting only	-
3.2	15.407(a)	Maximum Conducted Output Power	Pass	-
3.3	15.407(a)	Power Spectral Density	Pass	-
3.4	15.407(b)	Unwanted Emissions	Pass	1.68 dB under the limit at 17475.00 MHz
3.5	15.207	AC Conducted Emission	Pass	13.24 dB under the limit at 1.59 MHz
3.6	15.203	Antenna Requirement	Pass	-

**Conformity Assessment Condition:**

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

**Disclaimer:**

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

**Reviewed by: William Chen**

**Report Producer: Ming Chen**



# 1 General Description

## 1.1 Product Feature of Equipment Under Test

Product Feature	
Equipment	Phone
Model Name	GC3VE
FCC ID	A4RGC3VE
EUT supports Radios application	GSM/EGPRS/WCDMA/HSPA/LTE/5G NR/NFC/GNSS/ WPT/UWB WLAN 11b/g/n HT20 WLAN 11a/n HT20/HT40 WLAN 11ac VHT20/VHT40/VHT80/VHT160 WLAN 11ax HE20/HE40/HE80/HE160 WLAN 11be EHT20/EHT40/EHT80/EHT160 Bluetooth BR/EDR/LE/HR

**Remark:** The above EUT's information was declared by manufacturer.

EUT Information List	
S/N	Performed Test Item
33141FDJG000WZ	RF Conducted Measurement
33141FDJG0009M 34281FDJG0009K	Radiated Spurious Emission
33141FDJG000BQ	Conducted Emission



### 1.2 Product Specification of Equipment Under Test

Product Specification is subject to this standard	
<b>Tx/Rx Frequency Range</b>	5180 MHz ~ 5240 MHz 5260 MHz ~ 5320 MHz 5500 MHz ~ 5720 MHz 5745 MHz ~ 5825 MHz
<b>Maximum Output Power</b>	<p><b>&lt;5180 MHz ~ 5240 MHz&gt;</b>  <b>MIMO &lt;Ant. 3+4&gt;</b>  802.11a: 22.93 dBm / 0.1963 W  802.11n HT20: 22.93 dBm / 0.1963 W  802.11n HT40: 22.18 dBm / 0.1652 W  802.11ac VHT20: 22.93 dBm / 0.1963 W  802.11ac VHT40: 22.18 dBm / 0.1652 W  802.11ac VHT80: 19.92 dBm / 0.0982 W  802.11ac VHT160: 16.97 dBm / 0.0498 W  802.11ax HE20: 22.93 dBm / 0.1963 W  802.11ax HE40: 22.18 dBm / 0.1652 W  802.11ax HE80: 19.92 dBm / 0.0982 W  802.11ax HE160: 16.97 dBm / 0.0498 W  802.11be EHT20: 23.08 dBm / 0.2032 W  802.11be EHT40: 22.44 dBm / 0.1754 W  802.11be EHT 80: 19.56 dBm / 0.0904 W  802.11be EHT 160: 17.07 dBm / 0.0509 W</p> <p><b>&lt;5260 MHz ~ 5320 MHz&gt;</b>  <b>MIMO &lt;Ant. 3+4&gt;</b>  802.11a: 22.36 dBm / 0.1722 W  802.11n HT20: 22.31 dBm / 0.1702 W  802.11n HT40: 22.17 dBm / 0.1648 W  802.11ac VHT20: 22.31 dBm / 0.1702 W  802.11ac VHT40: 22.17 dBm / 0.1648 W  802.11ac VHT80: 19.46 dBm / 0.0883 W  802.11ax HE20: 22.31 dBm / 0.1702 W  802.11ax HE40: 22.17 dBm / 0.1648 W  802.11ax HE80: 19.46 dBm / 0.0883 W  802.11be EHT20: 22.46dBm / 0.1762W  802.11be EHT40: 22.41 dBm / 0.1742 W  802.11be EHT 80: 19.66 dBm / 0.0925 W  802.11be EHT 160: 18.36 dBm / 0.0685 W</p>



Product Specification is subject to this standard	
Maximum Output Power	<b>&lt;5500 MHz ~ 5720 MHz&gt;</b>
	<b>MIMO &lt;Ant. 3+4&gt;</b>
	802.11a: 22.21 dBm / 0.1663 W
	802.11n HT20: 22.21 dBm / 0.163W
	802.11n HT40: 22.02 dBm / 0.1592 W
	802.11ac VHT20: 22.21 dBm / 0.1663 W
	802.11ac VHT40: 22.02 dBm / 0.1592 W
	802.11ac VHT80: 22.11 dBm / 0.1626 W
	802.11ac VHT160: 18.31 dBm / 0.0678 W
	802.11ax HE20: 22.16 dBm / 0.1644 W
	802.11ax HE40: 22.02 dBm / 0.1592 W
	802.11ax HE80: 22.11 dBm / 0.1626 W
	802.11ax HE160: 18.31 dBm / 0.0678 W
	802.11be EHT20: 22.41dBm / 0.1742W
	802.11be EHT40: 22.31 dBm / 0.1702 W
	802.11be EHT 80: 22.26 dBm / 0.1683 W
	802.11be EHT 160: 18.36 dBm / 0.0685 W
	<b>&lt;5745 MHz ~ 5825 MHz&gt;</b>
	<b>MIMO &lt;Ant. 3+4&gt;</b>
	802.11a: 21.66 dBm / 0.1466 W
	802.11n HT20: 21.44 dBm / 0.1393 W
	802.11n HT40: 22.32 dBm / 0.1706 W
	802.11ac VHT20: 21.38 dBm / 0.1374 W
	802.11ac VHT40: 22.32 dBm / 0.1706 W
	802.11ac VHT80: 22.21 dBm / 0.1663 W
	802.11ac VHT160: 28.86 dBm / 0.7691 W
	802.11ax HE20: 21.44 dBm / 0.1393 W
	802.11ax HE40: 22.32 dBm / 0.1706 W
	802.11ax HE80: 22.21 dBm / 0.1663 W
	802.11ax HE160: 28.86 dBm / 0.7691 W
	802.11be EHT20: 21.64 dBm / 0.1459 W
	802.11be EHT40: 22.57 dBm / 0.1807 W
	802.11be EHT 80: 22.41 dBm / 0.1742 W



Product Specification is subject to this standard			
99% Occupied Bandwidth	<p><b>MIMO &lt;Ant. 3&gt;</b>            802.11a: 18.13 MHz            802.11be EHT20: 19.53 MHz            802.11be EHT40: 38.36 MHz            802.11be EHT80: 77.44 MHz            802.11be EHT160: 157.28MHz</p> <p><b>MIMO &lt;Ant. 4&gt;</b>            802.11a: 19.48 MHz            802.11be EHT20: 20.18 MHz            802.11be EHT40: 38.66 MHz            802.11be EHT80: 77.44 MHz            802.11be EHT160: 157.52 MHz</p>		
Antenna Type	<p><b>&lt;5180 MHz ~ 5240 MHz&gt;</b>            &lt;Ant. 3&gt;: PIFA Antenna            &lt;Ant. 4&gt;: IFA Antenna</p> <p><b>&lt;5260 MHz ~ 5320 MHz&gt;</b>            &lt;Ant. 3&gt;: PIFA Antenna            &lt;Ant. 4&gt;: IFA Antenna</p> <p><b>&lt;5500 MHz ~ 5720 MHz&gt;</b>            &lt;Ant. 3&gt;: PIFA Antenna            &lt;Ant. 4&gt;: IFA Antenna</p> <p><b>&lt;5745 MHz ~ 5825 MHz&gt;</b>            &lt;Ant. 3&gt;: PIFA Antenna            &lt;Ant. 4&gt;: IFA Antenna</p>		
Antenna Gain	<p><b>&lt;5180 MHz ~ 5240 MHz&gt;</b>            &lt;Ant. 3&gt;: -2.00 dBi            &lt;Ant. 4&gt;: -4.60 dBi</p> <p><b>&lt;5260 MHz ~ 5320 MHz&gt;</b>            &lt;Ant. 3&gt;: -2.00 dBi            &lt;Ant. 4&gt;: -3.90 dBi</p> <p><b>&lt;5500 MHz ~ 5720 MHz&gt;</b>            &lt;Ant. 3&gt;: -0.40 dBi            &lt;Ant. 4&gt;: -0.80 dBi</p> <p><b>&lt;5745 MHz ~ 5825 MHz&gt;</b>            &lt;Ant. 3&gt;: -0.60 dBi            &lt;Ant. 4&gt;: -1.40 dBi</p>		
Type of Modulation	802.11a/n: OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ac: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM) 802.11ax: OFDMA (BPSK / QPSK / 16QAM / 64QAM / 256QAM / 1024QAM) 802.11be: OFDMA (BPSK/QPSK/16QAM/64QAM/256QAM/1024QAM/4096QAM)		
Antenna Function Description		Ant. 3	Ant. 4
	802.11 a/n/ac/ax/be MIMO	V	V

**Remark:**

1. MIMO Ant. 3+4 Directional Gain is a calculated result from MIMO Ant. 3 and MIMO Ant. 4. The formula used in calculation is documented in section 1.2.1.
2. Power of MIMO Ant. 3 + Ant. 4 is a calculated result from sum of the power MIMO Ant. 3 and MIMO Ant. 4.
3. The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.



**1.2.1 Antenna Gain**

Follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01 F2)f)ii)

Directional gain =  $G_{ANT}$  + Array Gain, where Array Gain is as follows:

For power measurements on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for  $N_{ANT} \leq 4$ .

$G_{ANT}$  is set equal to the gain of the antenna having the highest gain.

For PSD measurements, the directional gain calculation.

$$DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

where

Each antenna is driven by no more than one spatial stream;

$N_{SS}$  = the number of independent spatial streams of data;

$N_{ANT}$  = the total number of antennas

$g_{j,k} = 10^{G_k / 20}$  if the  $k$ th antenna is being fed by spatial stream  $j$ , or zero if it is not;  
 $G_k$  is the gain in dBi of the  $k$ th antenna.

As minimum  $N_{SS}=1$  is supported by EUT, the formula can be simplified as:

Directional gain =  $10 \cdot \log[(10^{G_1 / 20} + 10^{G_2 / 20} + \dots + 10^{G_N / 20})^2 / N_{ANT}]$  dBi

Where  $G_1, G_2, \dots, G_N$  denote single antenna gain.

The directional gain “DG” is calculated as following table.

			DG	DG	Power	PSD
			for	for	Limit	Limit
	Ant 3	Ant 4	Power	PSD	Reduction	Reduction
	(dBi)	(dBi)	(dBi)	(dBi)	(dB)	(dB)
<b>Band I</b>	-2.00	-4.60	-2.00	-0.19	0.00	0.00
<b>Band II</b>	-2.00	-3.90	-2.00	0.11	0.00	0.00
<b>Band III</b>	-0.40	-0.80	-0.40	2.41	0.00	0.00
<b>Band IV</b>	-0.60	-1.40	-0.60	2.02	0.00	0.00

Calculation example:

If a device has two antenna,  $G_{ANT1} = -2.00$  dBi;  $G_{ANT2} = -4.60$  dBi

Directional gain of power measurement =  $\max(-2.00, -4.60) + 0 = -2.00$  dBi

Directional gain of PSD derived from formula which is

$10 \times \log \left\{ \left[ 10^{(-2.00 \text{ dBi} / 20)} + 10^{(-4.60 \text{ dBi} / 20)} \right]^2 / 2 \right\}$

= -0.19 dBi

Power and PSD limit reduction = Composite gain – 6dBi, ( min = 0 )



### 1.3 Modification of EUT

No modifications made to the EUT during the testing.

### 1.4 Testing Location

<b>Test Site</b>	Sporton International Inc. EMC & Wireless Communications Laboratory
<b>Test Site Location</b>	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978
<b>Test Site No.</b>	<b>Sporton Site No.</b>
	CO05-HY (TAF Code: 1190)
<b>Remark</b>	The Conducted Emission test item subcontracted to Sporton International Inc. EMC & Wireless Communications Laboratory.

**Note:** The test site complies with ANSI C63.4 2014 requirement.

<b>Test Site</b>	Sporton International Inc. Wensan Laboratory
<b>Test Site Location</b>	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
<b>Test Site No.</b>	<b>Sporton Site No.</b>
	TH05-HY, 03CH13-HY

**Note:** The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW1190 and TW3786

### 1.5 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01.
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ♦ ANSI C63.10-2013

**Remark:**

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.



## 2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape) and accessory (Adapter or Earphone), and adjusting the measurement antenna orientation, following C63.10 exploratory test procedures and only the worst case emissions were reported in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

### 2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5150-5250 MHz Band 1 (U-NII-1)	36	5180	44	5220
	38*	5190	46*	5230
	40	5200	48	5240
	42#	5210		
Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5250-5350 MHz Band 2 (U-NII-2A)	52	5260	60	5300
	54*	5270	62*	5310
	56	5280	64	5320
	58#	5290		
Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5470-5725 MHz Band 3 (U-NII-2C)	100	5500	112	5560
	102*	5510	116	5580
	104	5520	132	5660
	106#	5530	134*	5670
	108	5540	136	5680
	110*	5550	140	5700



Frequency Band	Channel	Freq. (MHz)
5150-5350 MHz	50@	5250
5470-5725 MHz	114@	5570

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
TDWR Channel	118*	5590	124	5620
	120	5600	126*	5630
	122#	5610	128	5640

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
Straddle Channel	138#	5690	144	5720
	142*	5710		

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5725-5850 MHz Band 4 (U-NII-3)	149	5745	157	5785
	151*	5755	159*	5795
	153	5765	161	5805
	155#	5775	165	5825

**Note:**

1. The above Frequency and Channel with "\*" are 802.11n HT40 and 802.11ac VHT40 and 802.11ax HE40 and 802.11be EHT40.
2. The above Frequency and Channel with "#" are 802.11ac VHT80 and 802.11ax HE80 and 802.11be EHT80.
3. The above Frequency and Channel with "@" are 802.11ac VHT160 and 802.11ax HE160 and 802.11be EHT160.



## 2.2 Test Mode

This device supports WiFi 802.11be 20MHz bandwidth for 2.4GHz and 160MHz bandwidth for both 5GHz and 6GHz.

This device supports 26/52/106/242/484/996 single tone RU modes for 802.11ax/be modes and the 242/484/996-tone RU modes are covered by 20/40/80MHz channels.

This device supports MRU 52T+26T/106T+26T (small RU) and punctured modes (large RU) for 802.11be mode.

The PSD of partial RU/MRU modes are reduced to be smaller than full RU according to TCB workshop interim guidance Oct. 2018 and Oct. 2022 for WiFi 7 device.

The 802.11ax/be modes are investigated among full RU, single RU and MRU modes for emission spot check and the 11ax modes are covered by 11be modes.

The PSD and power of partial RU and MRU are less than full RU configurations so the full RU is chosen as main test configuration.

The SISO mode conducted power is covered by MIMO mode per chain, so only the MIMO mode is chosen as main test configuration..

The power for 802.11n, 802.11ac and 802.11ax mode is smaller than 802.11be mode, so all other conducted and radiated test is covered by 802.11be mode.

The final test modes include the worst data rates for each modulation shown in the table below.

### MIMO Mode

Specification	MCS index /Data Rate
802.11a	6 Mbps
802.11n HT20 (Covered by EHT20)	MCS0
802.11n HT40 (Covered by EHT40)	MCS0
802.11ac VHT20 (Covered by EHT20)	MCS0
802.11ac VHT40 (Covered by EHT40)	MCS0
802.11ac VHT80 (Covered by EHT80)	MCS0
802.11ac VHT160 (Covered by EHT160)	MCS0
802.11ax HE20 (Covered by EHT20)	MCS0
802.11ax HE40 (Covered by EHT40)	MCS0
802.11ax HE80 (Covered by EHT80)	MCS0
802.11ax HE160 (Covered by EHT160)	MCS0
802.11be EHT20	MCS0
802.11be EHT40	MCS0
802.11be EHT80	MCS0
802.11be EHT160	MCS0

**Remark:** The conducted power level of each chain in MIMO mode is equal or higher than SISO mode.



Test Cases	
<b>AC Conducted Emission</b>	Mode 1 : GSM850 Idle + WLAN (5GHz) Link + Bluetooth Link + USB Cable 1 (Charging from AC Adapter 2)
<b>Remark:</b>	
1. For Radiated Test Cases, the tests were performed with AC Adapter 1 and USB Cable 1. 2. During the preliminary test, both charging modes (Adapter mode and WPT Client mode) were verified. It is determined that the adaptor mode is the worst case for official test.	

Ch. #		Band I : 5150-5250 MHz	Band II : 5250-5350 MHz	Band III : 5470-5725MHz
		802.11a	802.11a	802.11a
L	Low	36	52	100
M	Middle	44	60	116
H	High	48	64	140
Straddle		-	-	144

Ch. #		Band I : 5150-5250 MHz	Band II : 5250-5350 MHz	Band III : 5470-5725MHz
		802.11be EHT20	802.11be EHT20	802.11be EHT20
L	Low	36	52	100
M	Middle	44	60	116
H	High	48	64	140
Straddle		-	-	144

Ch. #		Band I : 5150-5250 MHz	Band II : 5250-5350 MHz	Band III : 5470-5725MHz
		802.11be EHT40	802.11be EHT40	802.11be EHT40
L	Low	38	54	102
M	Middle	-	-	110
H	High	46	62	134
Straddle		-	-	142

Ch. #		Band I : 5150-5250 MHz	Band II : 5250-5350 MHz	Band III : 5470-5725MHz
		802.11be EHT80	802.11be EHT80	802.11be EHT80
L	Low	-	-	106
M	Middle	42	58	-
H	High	-	-	122
Straddle		-	-	138


<b>BW160</b>	<b>5150-5350 MHz</b>	<b>5470-5725MHz</b>
	<b>802.11be EHT160</b>	<b>802.11be EHT160</b>
<b>Ch. #</b>	50	114

<b>Ch. #</b>		<b>Band IV : 5725-5850 MHz</b>			
		<b>802.11a</b>	<b>802.11be EHT20</b>	<b>802.11be EHT40</b>	<b>802.11be EHT80</b>
<b>L</b>	<b>Low</b>	149	149	151	-
<b>M</b>	<b>Middle</b>	157	-	-	155
<b>H</b>	<b>High</b>	165	165	159	-


**Remark:** For radiation spurious emission, the modulation and the data rate picked for testing are determined by the Max. RF conducted power.

### 2.3 Connection Diagram of Test System

<AC Conducted Emission Mode>

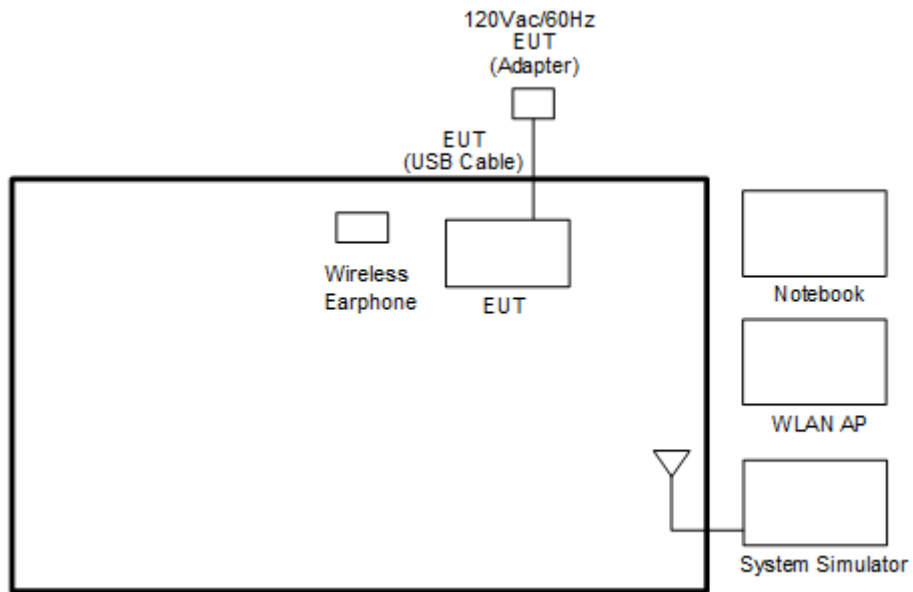

<WLAN Tx Mode>

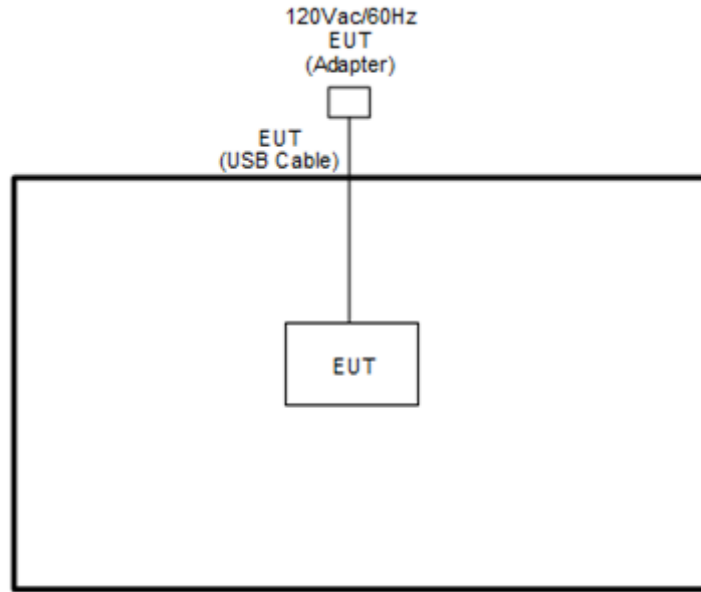

**2.4 Support Unit used in test configuration and system**

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
2.	Wireless Earphone	Google	G1007/G1008	A4RG1007/ A4RG1008	N/A	N/A
3.	WLAN AP	ASUS	RT-AC66U	KA2DIR628A2	N/A	Unshielded, 1.8 m
4.	Notebook	DELL	Latitude 3420	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m

**2.5 EUT Operation Test Setup**

The RF test items, Adb Command was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.





## 2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

*Offset = RF cable loss + attenuator factor.*

Following shows an offset computation example with cable loss 4.2 dB and 10 dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$



### **3 Test Result**

#### **3.1 Emission Bandwidth and 99% Occupied Bandwidth Measurement**

##### **3.1.1 Description of Emission Bandwidth and 99% Occupied Bandwidth**

26dB and 99% Occupied bandwidth are reporting only.

The minimum 6 dB bandwidth shall be at least 500 kHz for the band 5.725-5.85 GHz.

For Straddle Channel, according to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, if the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.


##### **3.1.2 Measuring Instruments**

Please refer to the measuring equipment list in this test report.

##### **3.1.3 Test Procedures**

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section C) Emission bandwidth
2. Set RBW = approximately 1% of the emission bandwidth.
3. Set the VBW > RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.
7. For 99% bandwidth measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW)  $\geq 3 * RBW$ .
8. For 6dB bandwidth measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 100 kHz and set the Video bandwidth (VBW)  $\geq 3 * RBW$ . Measure the maximum width of the emission that is 6 dB down from the peak of the emission.
9. Measure and record the results in the test report.

### 3.1.4 Test Setup




### 3.1.5 Test Result of Emission Bandwidth and 99% Occupied Bandwidth

Please refer to Appendix A.



MIMO <Ant. 3+4>


<802.11a>

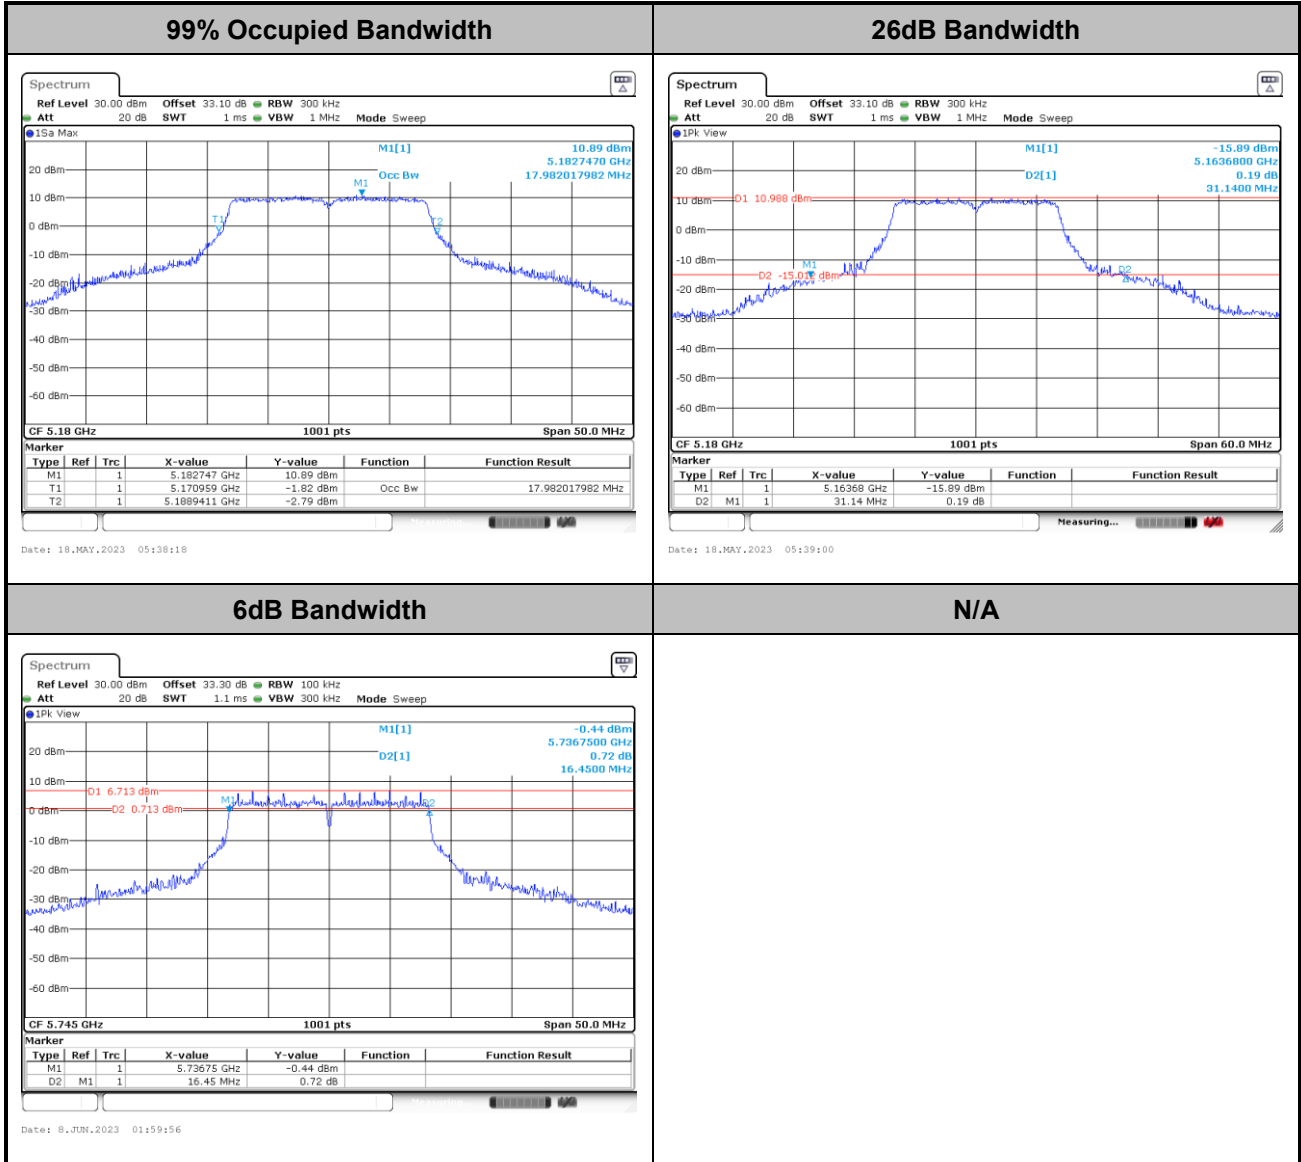

**Note:** The occupied channel bandwidth is maintained within the band of operation for all of the modulations.




<802.11be EHT20>

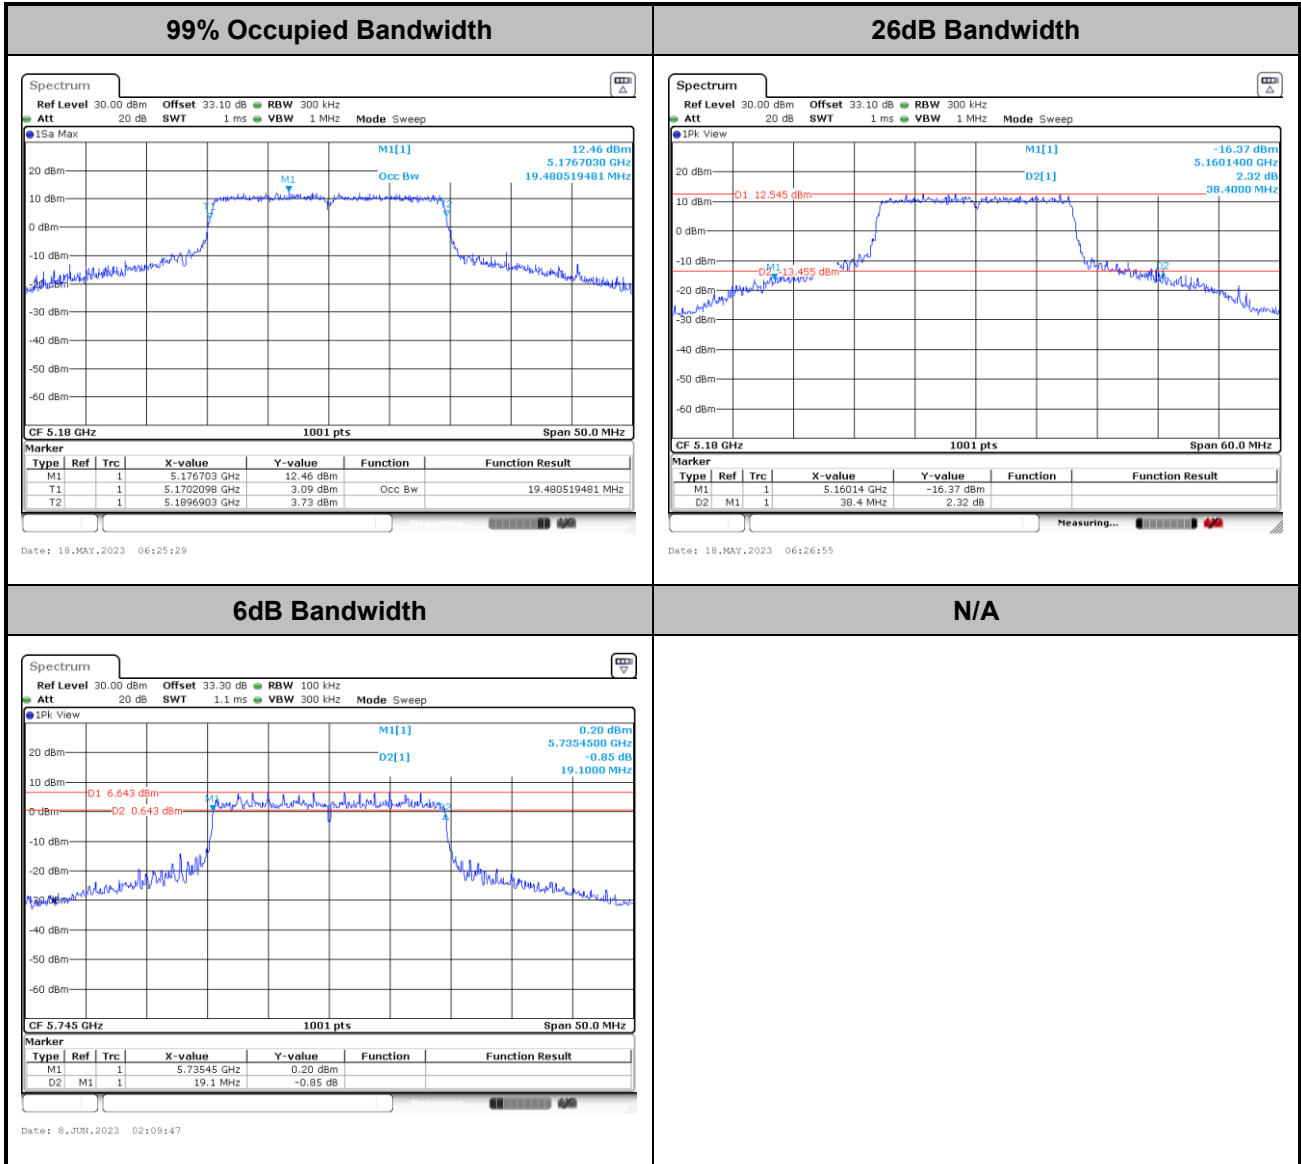

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.




<802.11be EHT40>

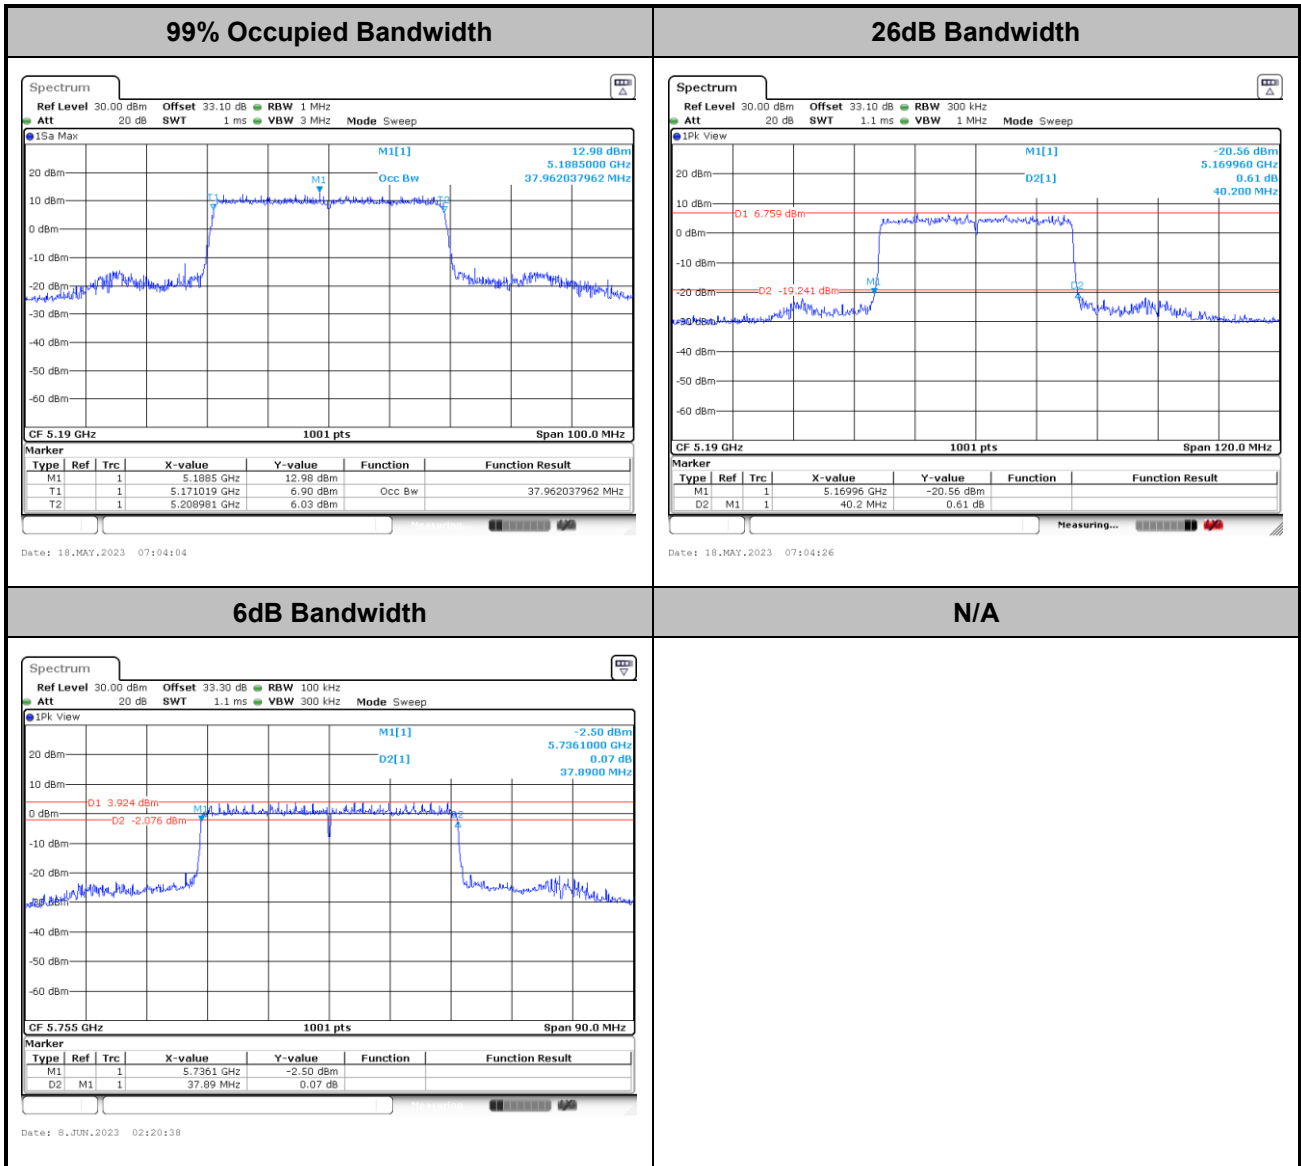

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.




<802.11be EHT80>

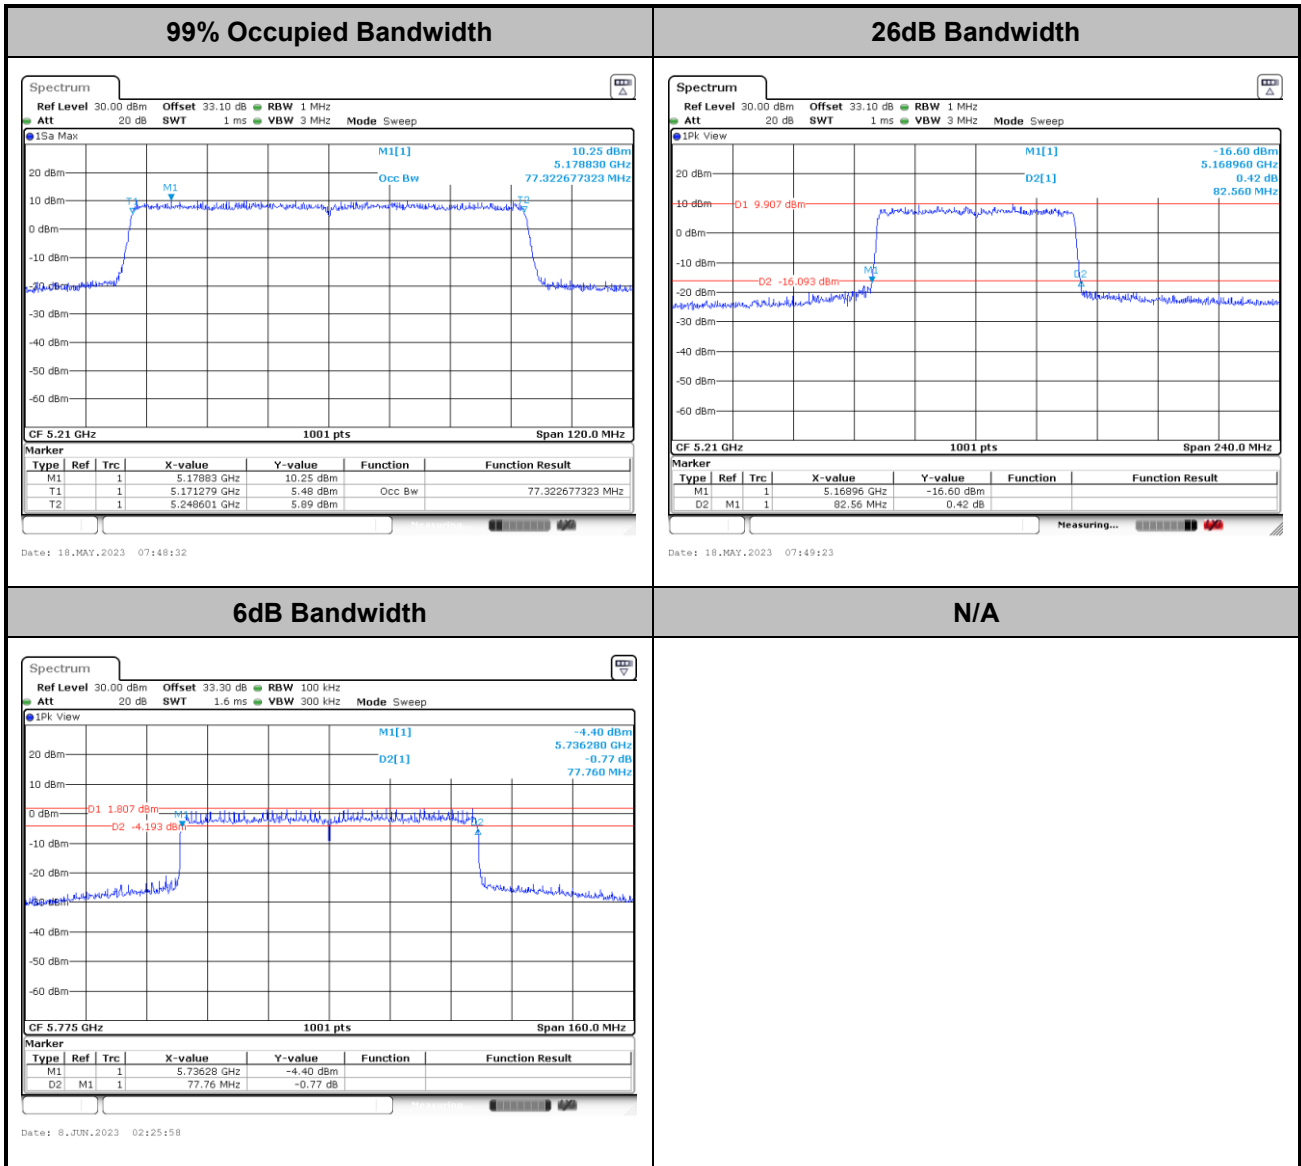

**Note:** The occupied channel bandwidth is maintained within the band of operation for all of the modulations.



<802.11be EHT160>

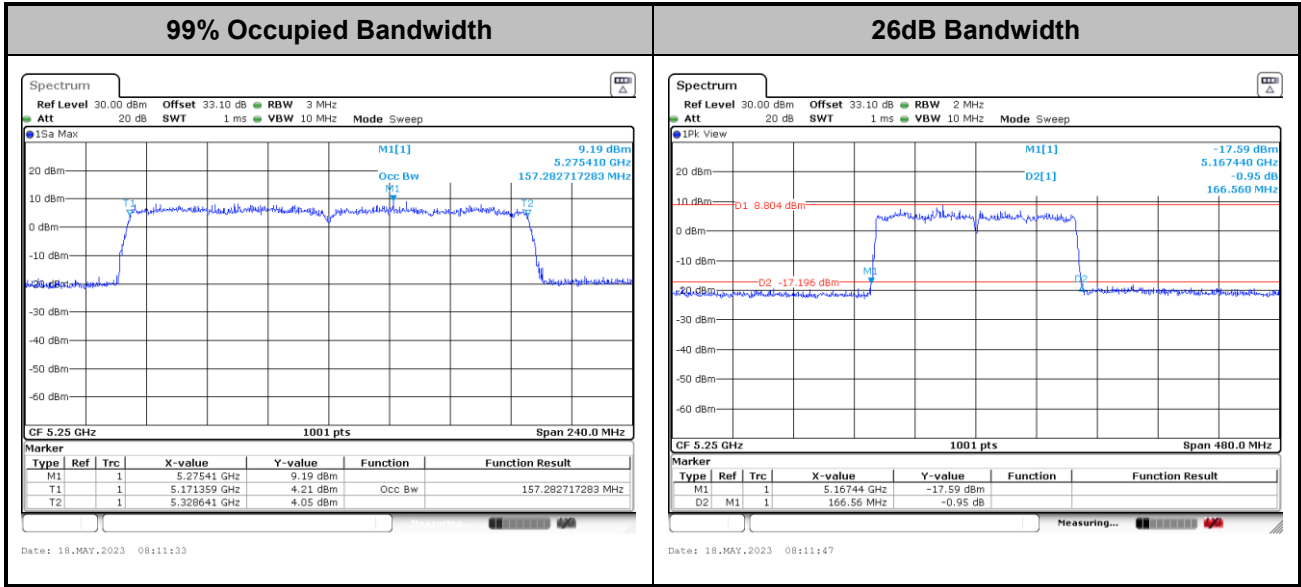

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.





## 3.2 Maximum Conducted Output Power Measurement

### 3.2.1 Limit of Maximum Conducted Output Power

<FCC 14-30 CFR 15.407>

For the 5.15–5.25 GHz bands:

■ For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW. For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

For the 5.25–5.725 GHz bands:

■ The maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm 10 log B, where B is the 26 dB emission bandwidth in megahertz.

For Straddle Channel, according to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, if the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

For the band 5.725–5.85 GHz:

■ the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Note that U-NII-2 band, devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

### 3.2.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

### 3.2.3 Test Procedures


The testing follows Method PM-G of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM-G (Measurement using a gated RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit at its maximum power control level.
3. Measure the average power of the transmitter.
4. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.
5. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01

For Straddle Channel, according to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, if the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

### 3.2.4 Test Setup

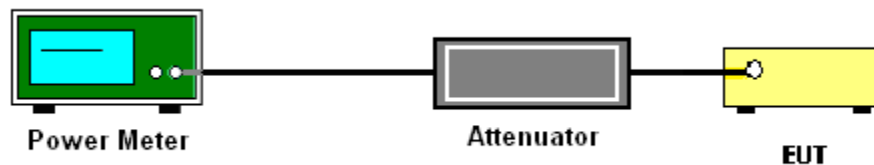

### 3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.



### 3.3 Power Spectral Density Measurement

#### 3.3.1 Limit of Power Spectral Density

<FCC 14-30 CFR 15.407>

**For the 5.15–5.25 GHz bands:**

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1.0 MHz band. For an indoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1.0 MHz band.

**For the 5.25–5.725 GHz bands:**

The maximum power spectral density shall not exceed 11 dBm in any 1.0 MHz band.

For Straddle Channel, according to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, if the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

**For the band 5.725–5.85 GHz:**

The maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### 3.3.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.



### 3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section F) Maximum power spectral density.

**For the band 5.15–5.25 GHz, 5.25–5.35 GHz, and 5.47–5.725 GHz:**

#### # Method SA-2 #

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- Measure the duty cycle.
  - Set span to encompass the entire emission bandwidth (EBW) of the signal.
  - Set RBW = 1 MHz.
  - Set VBW ≥ 3 MHz.
  - Number of points in sweep ≥ 2 Span / RBW.
  - Sweep time = auto.
  - Detector = RMS
  - Trace average at least 100 traces in power averaging mode.
  - Add  $10 \log(1/x)$ , where  $x$  is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add  $10 \log(1/0.25) = 6$  dB if the duty cycle is 25 percent.
1. The RF output of EUT is connected to the spectrum analyzer by a low loss cable.
  2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.
  3. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

Method (a): Measure and sum the spectra across the outputs.

The total final Power Spectral Density is from a device with 2 transmitter outputs. The spectrum measurements of the individual outputs are all performed with the same span and number of points; the spectrum value in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 to obtain the value for the first frequency bin of the summed spectrum.

For the band 5.725–5.85 GHz:

### # Method SA-3 #


(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- Measure the duty cycle.
  - Set span to encompass the entire emission bandwidth (EBW) of the signal.
  - Set RBW = 300kHz.
  - Set VBW  $\geq$  1 MHz.
  - Add  $10 \log(500 \text{ kHz/RBW})$  to the measured result, whereas RBW ( $<500 \text{ kHz}$ ) is the reduced resolution bandwidth of the spectrum analyzer set during measurement
  - Number of points in sweep  $\geq 2 \text{ Span} / \text{RBW}$ .
  - Sweep time = auto.
  - Detector = RMS
  - Trace average at least 100 traces in power averaging mode.
  - Add  $10 \log(1/x)$ , where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add  $10 \log(1/0.25) = 6 \text{ dB}$  if the duty cycle is 25 percent.
1. The RF output of EUT is connected to the spectrum analyzer by a low loss cable.
  2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.
  3. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

Method (c): Measure and add  $10 \log(N_{\text{ANT}})$  dB.

With this technique, spectrum measurements are performed at each output of the device, but rather than summing the spectra or the spectral peaks across the outputs, the quantity  $10 \log(N_{\text{ANT}})$  dB is added to each spectrum value before comparing to the emission limit. The addition of  $10 \log(N_{\text{ANT}})$  dB serves to apportion the emission limit among the  $N_{\text{ANT}}$  outputs so that each output is permitted to contribute no more than  $1/N_{\text{ANT}}^{\text{th}}$  of the PSD limit.

### 3.3.4 Test Setup




### 3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.




For the band 5.15–5.25 GHz, 5.25–5.35 GHz, and 5.47–5.725 GHz:

<802.11a>

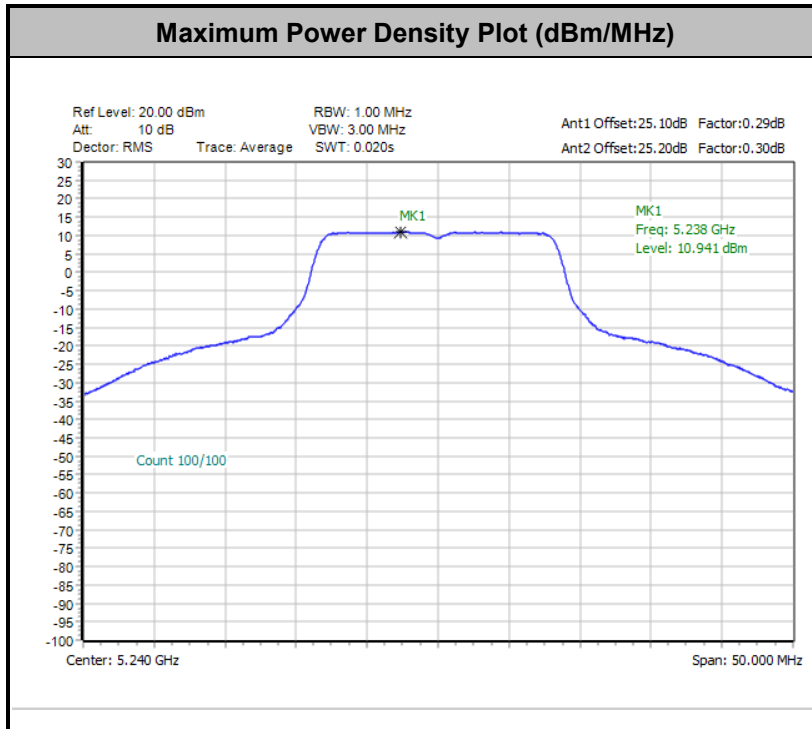


Remark: The test plot is showing a bin by bin combined result mathematically adds two traces.


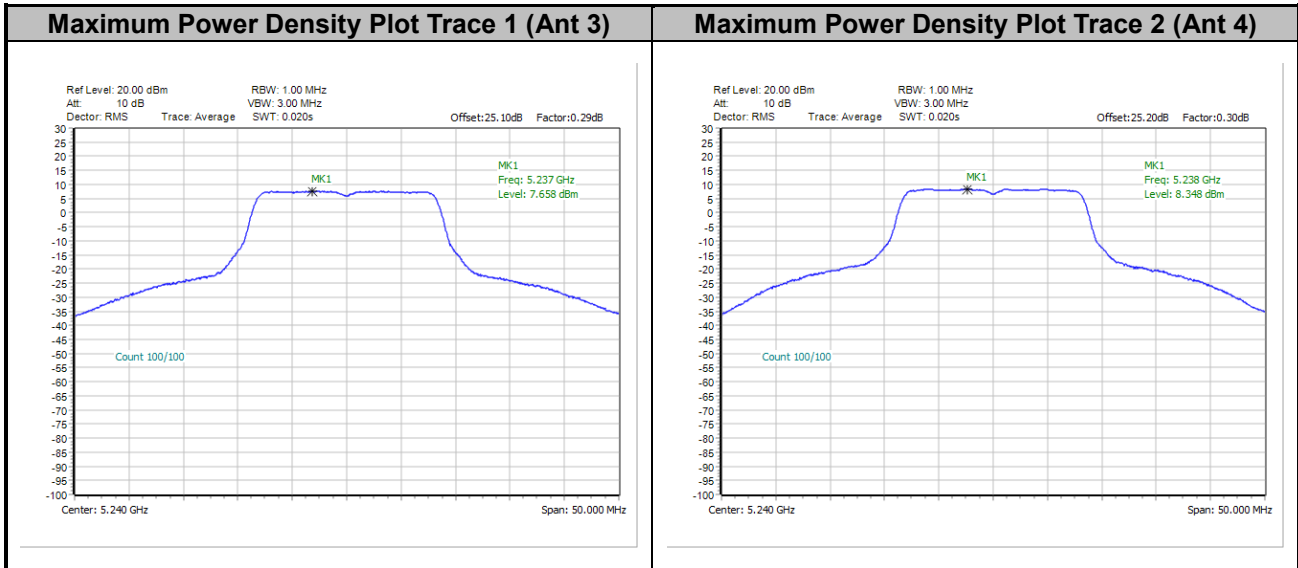




<802.11be EHT20>

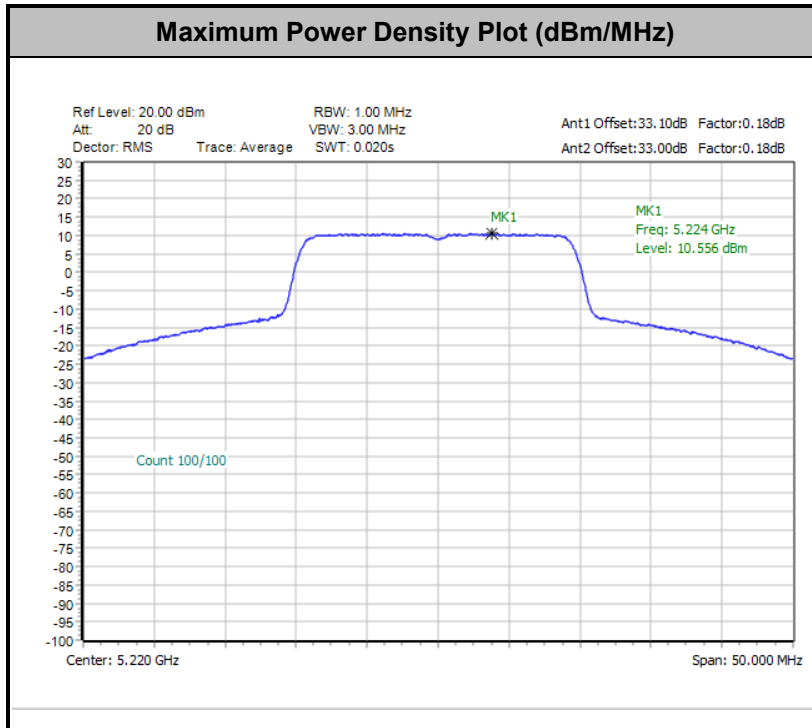


Remark: The test plot is showing a bin by bin combined result mathematically adds two traces.

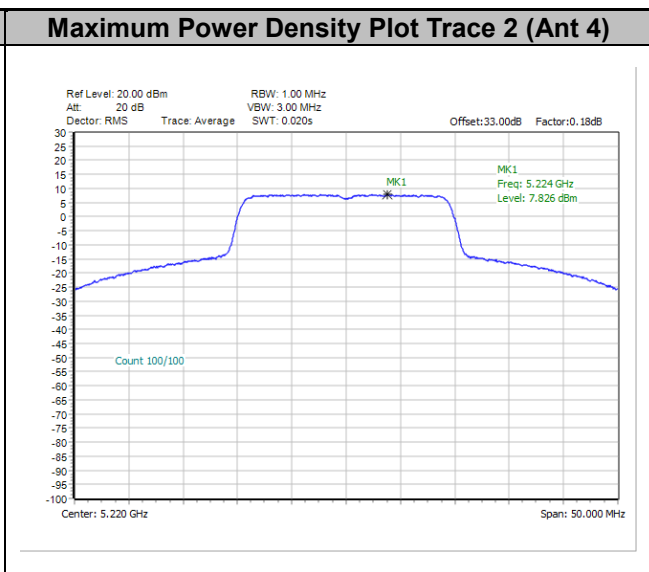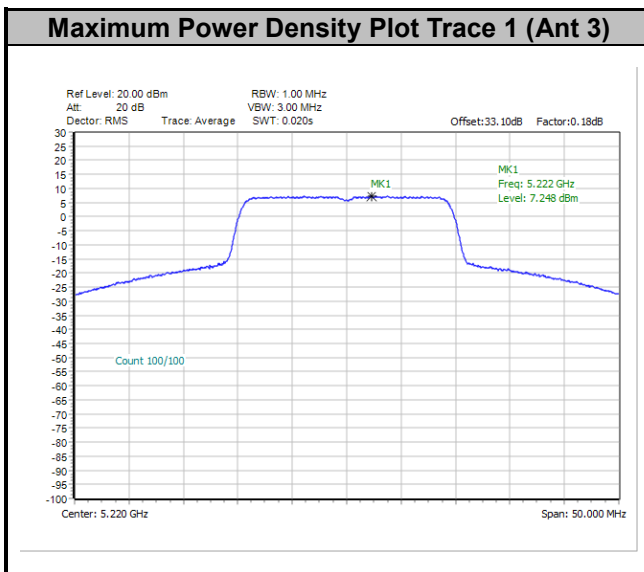




<802.11be EHT40>

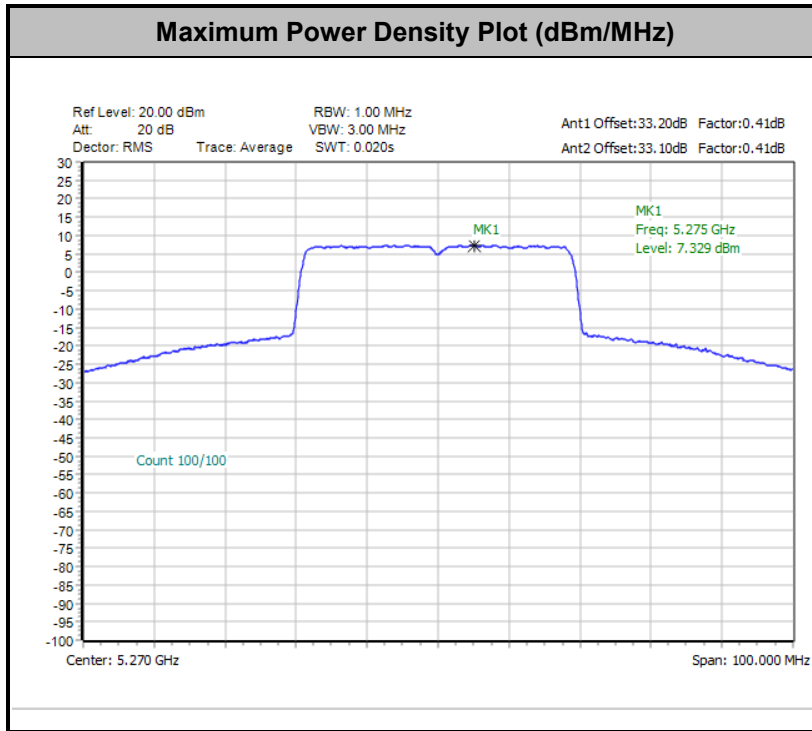


Remark: The test plot is showing a bin by bin combined result mathematically adds two traces.

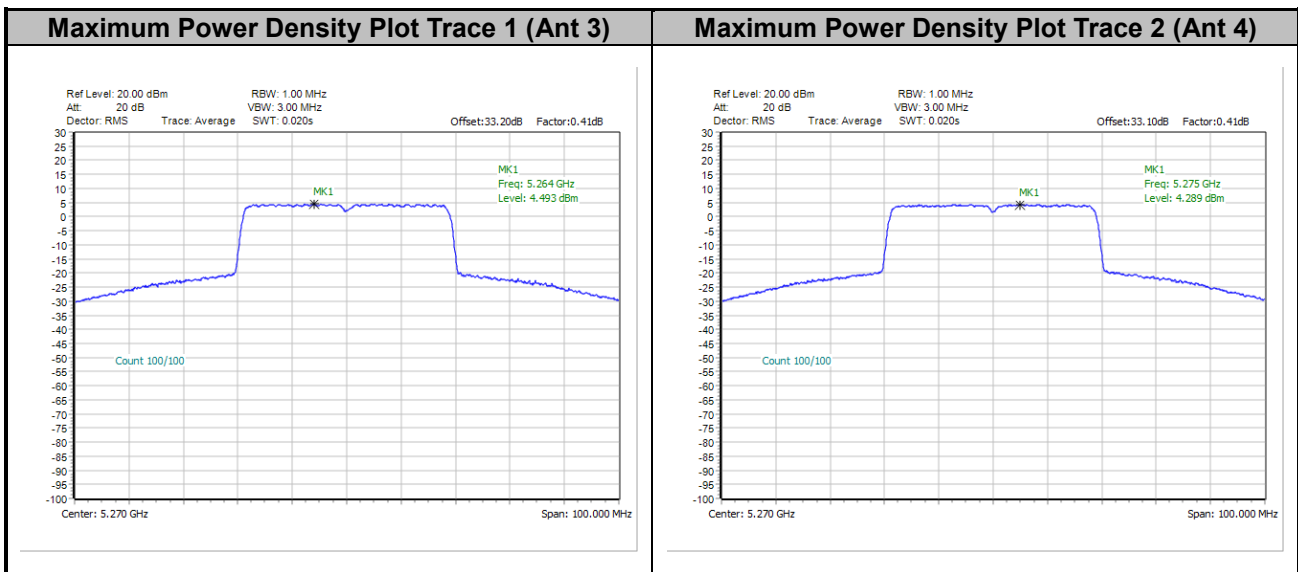







<802.11be EHT80>

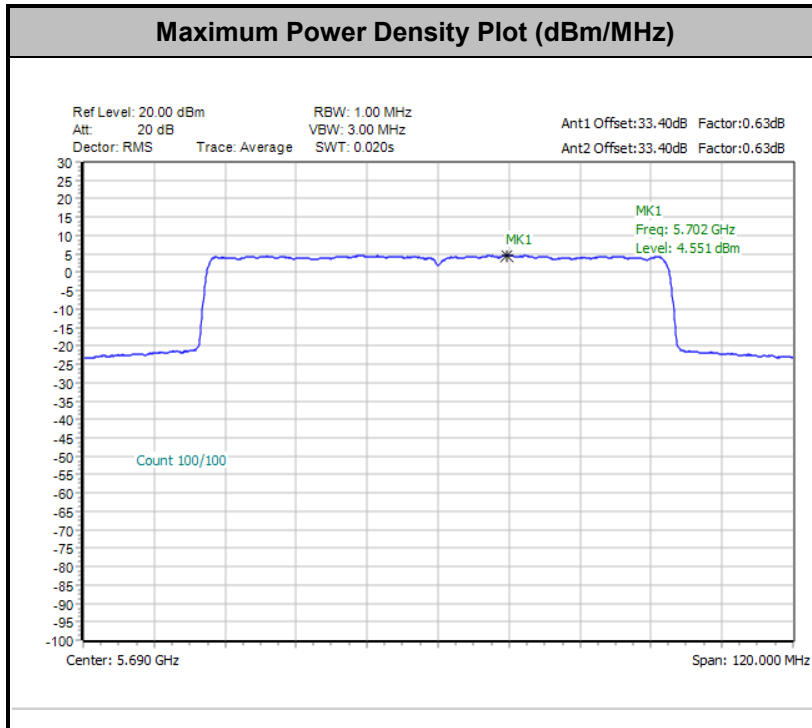


Remark: The test plot is showing a bin by bin combined result mathematically adds two traces.

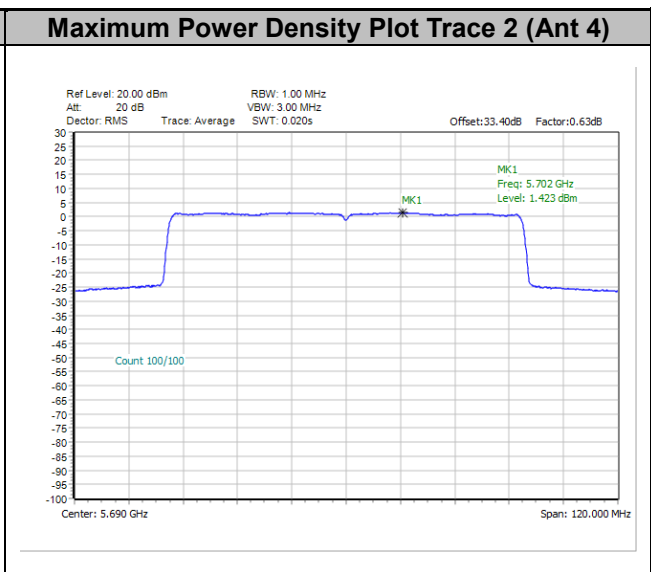
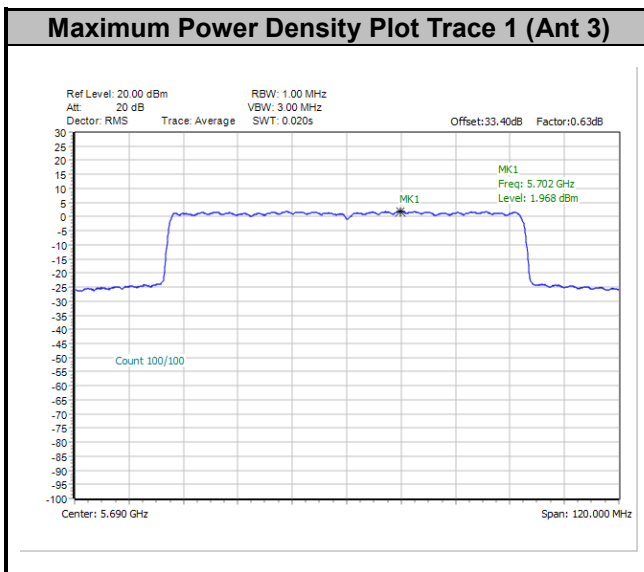




<802.11be EHT80 Puncture 20RU4>

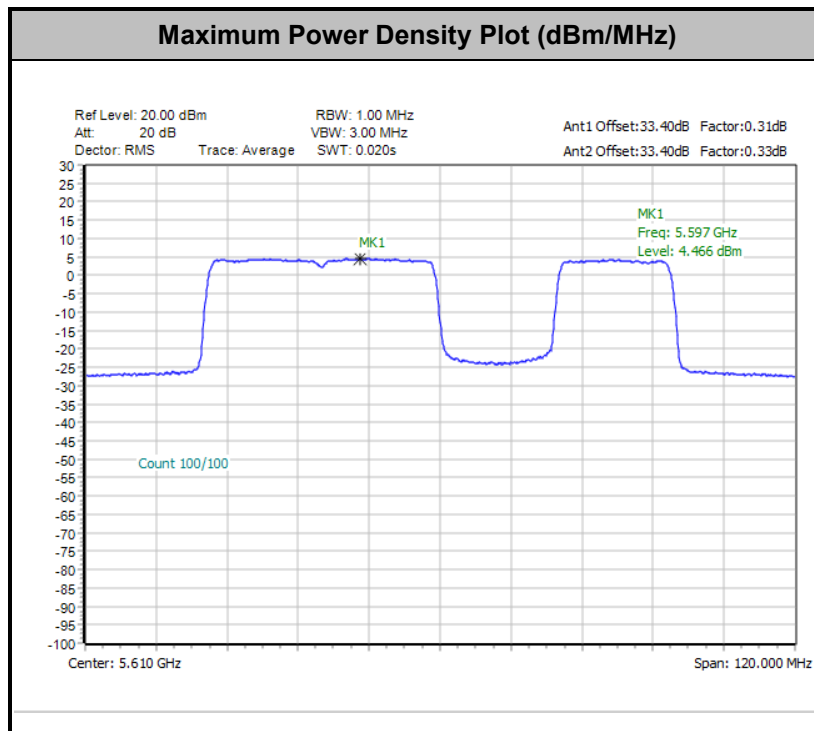


Remark: The test plot is showing a bin by bin combined result mathematically adds two traces.

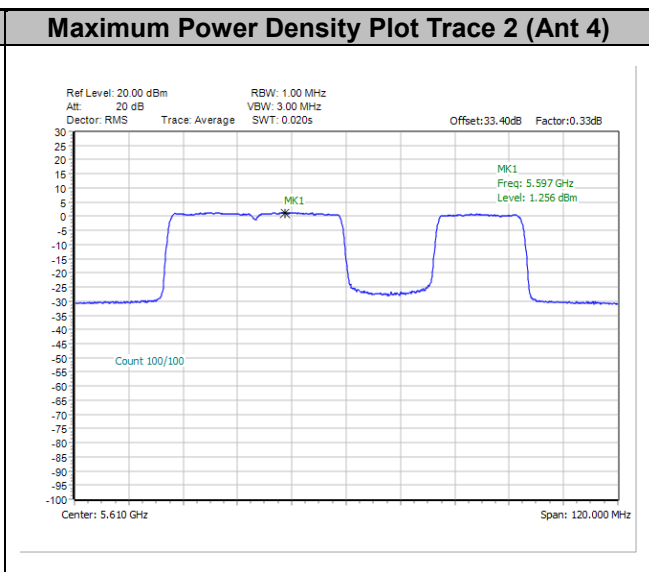
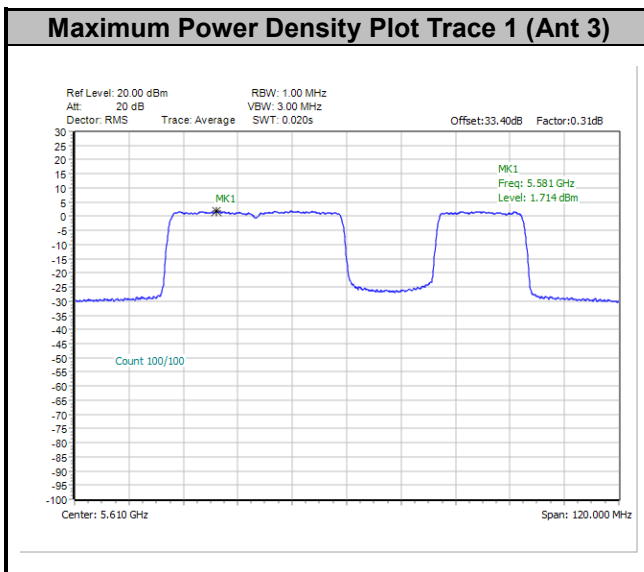




<802.11be EHT160>

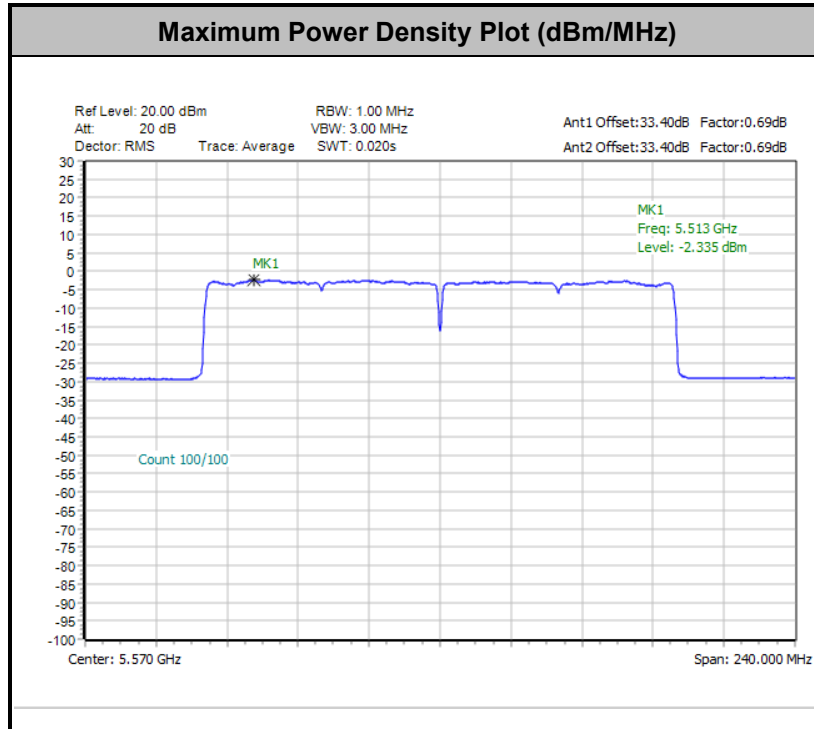


Remark: The test plot is showing a bin by bin combined result mathematically adds two traces.

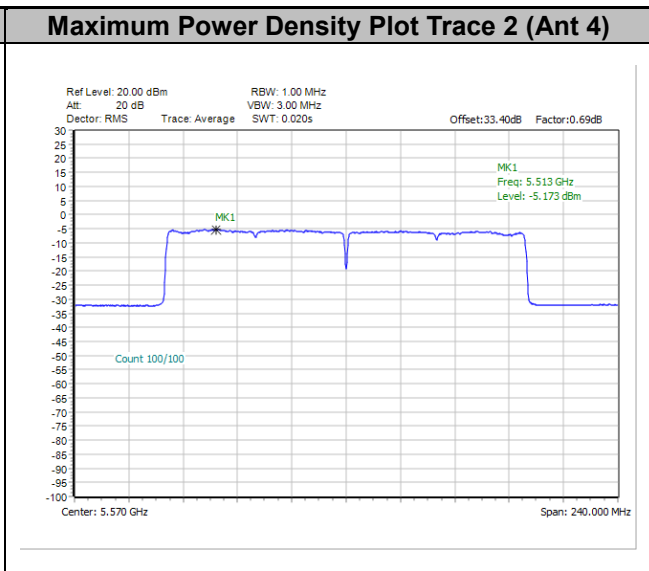
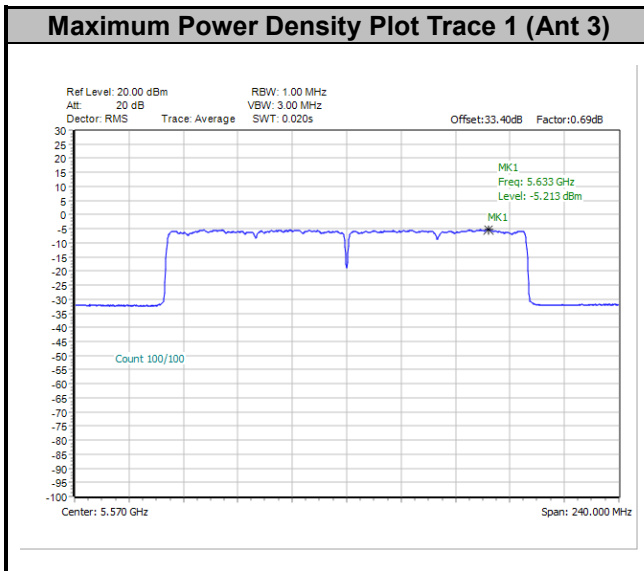




<802.11ax EHT160 Puncture 40RU3>

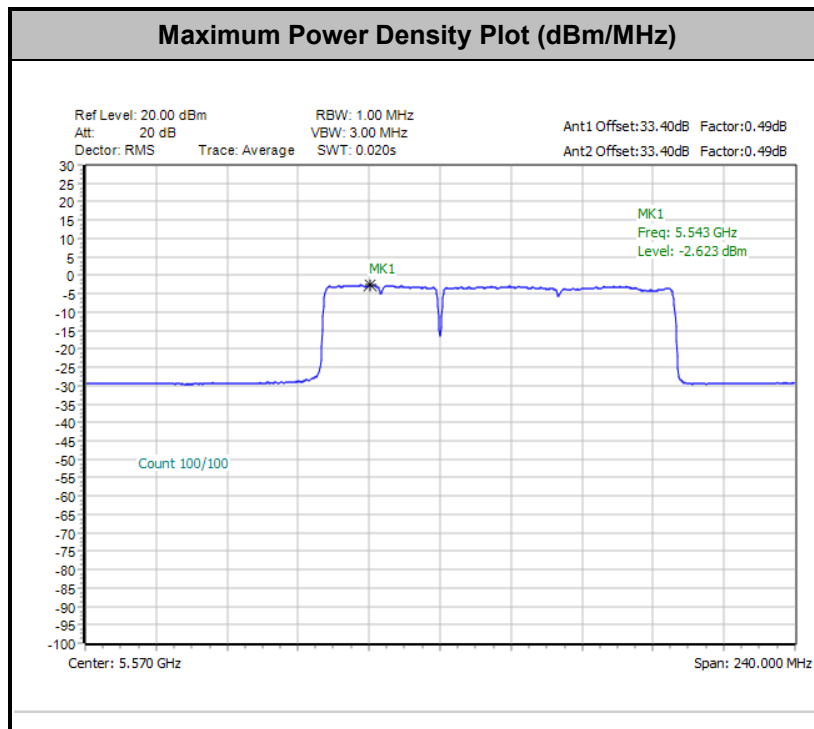


Remark: The test plot is showing a bin by bin combined result mathematically adds two traces.

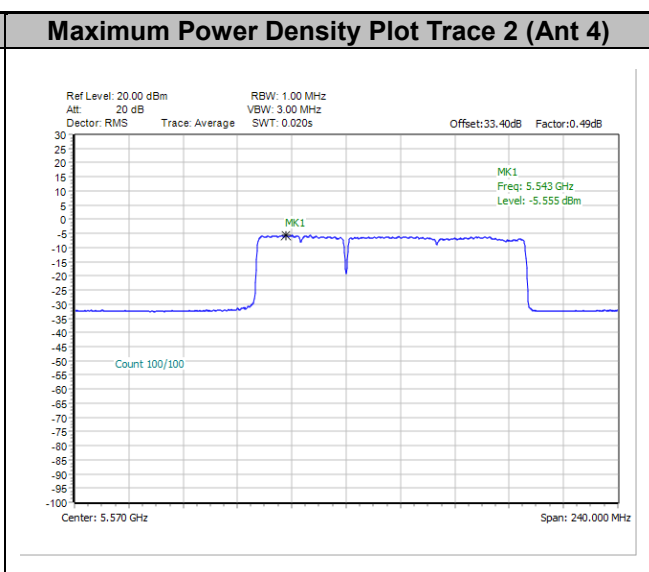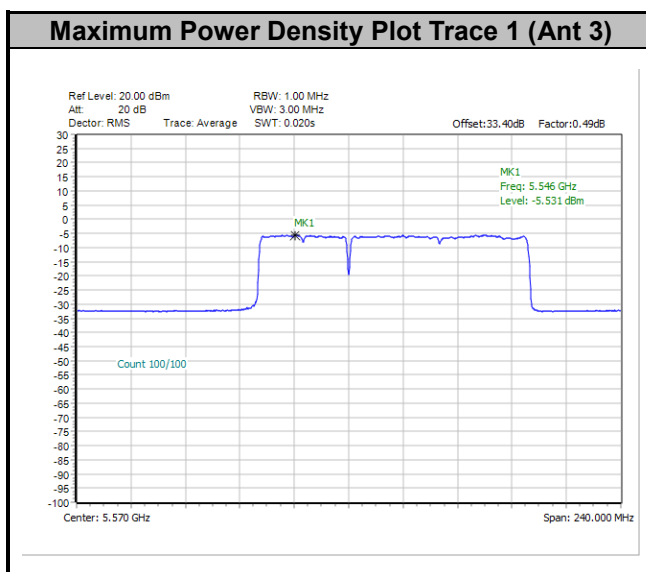




For the band 5.725–5.85 GHz:

<802.11a>

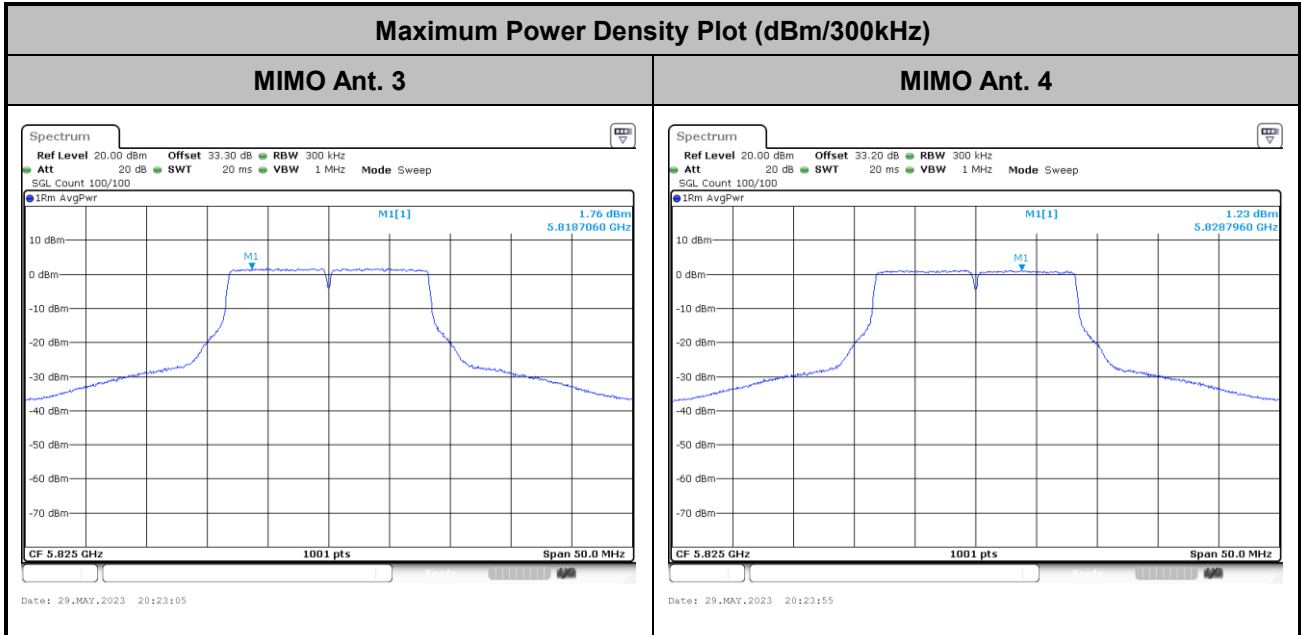


<802.11be EHT20>

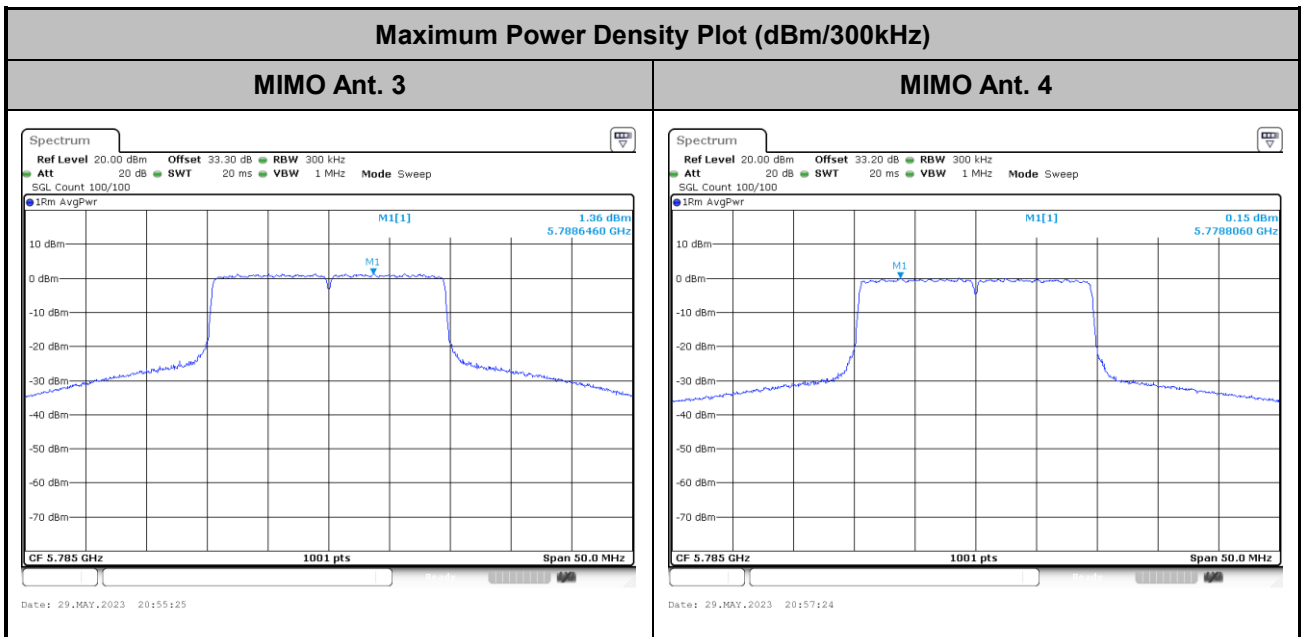




<802.11be EHT40>

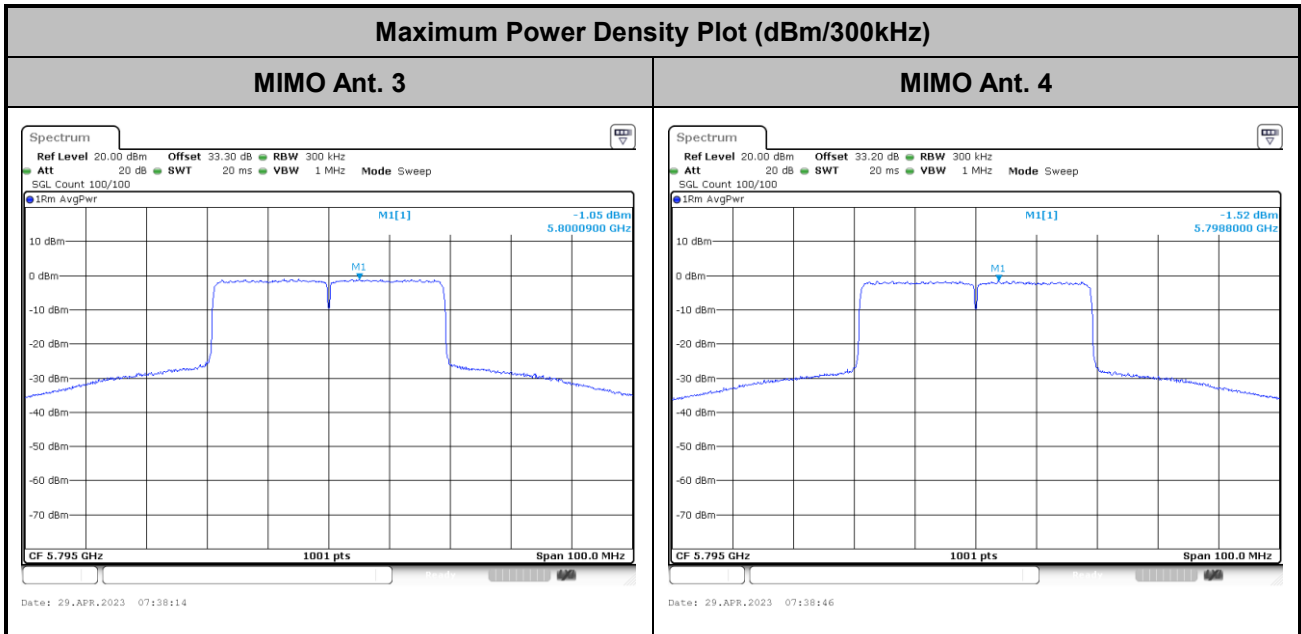



<802.11be EHT80>

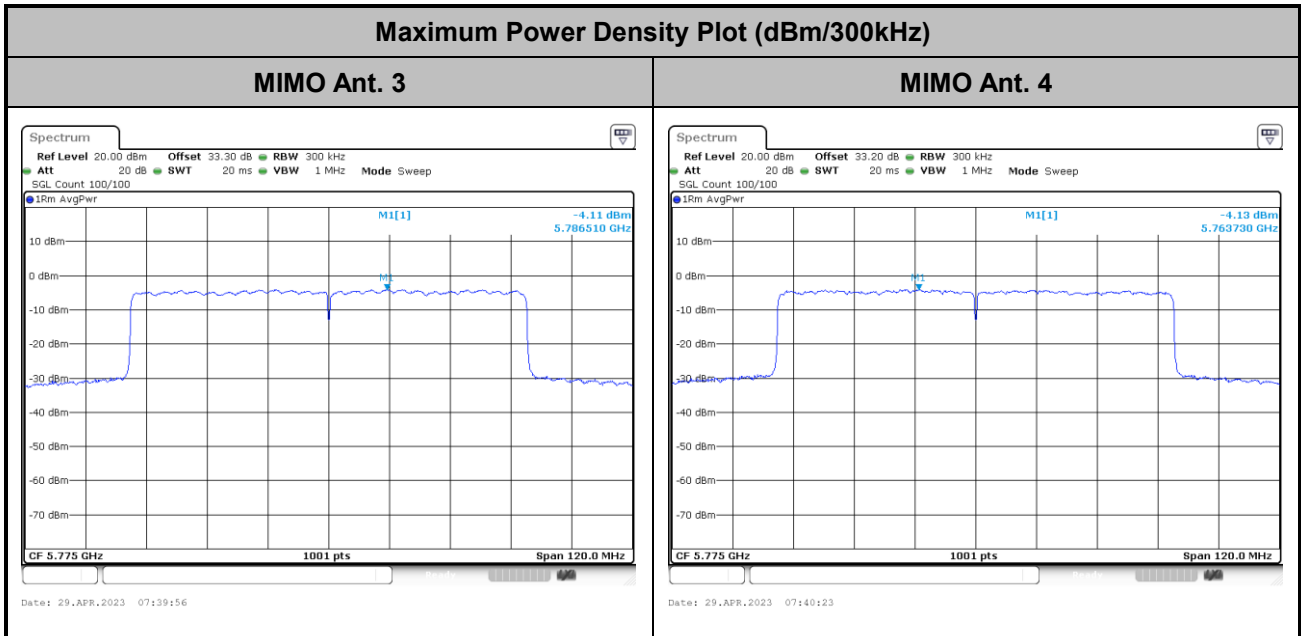



### 3.4 Unwanted Emissions Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

#### 3.4.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5150-5250 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27dBm/MHz.

For transmitters operating in the 5250-5350 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27 dBm/MHz. Devices operating in the 5250-5350 MHz band that generate emissions in the 5150-5250 MHz band must meet all applicable technical requirements for operation in the 5150-5250 MHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5150-5250 MHz band.

For transmitters operating in the 5470-5600 MHz and 5650-5725MHz band: all emissions outside of the 5470-5600 MHz and 5650-5725MHz band shall not exceed an EIRP of -27 dBm/MHz.

For transmitters operating in the 5.725-5.85 GHz band:

All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

- (2) Unwanted spurious emissions falls in restricted bands shall comply with the general field strength limits as below table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

**Note:** The following formula is used to convert the EIRP to field strength.

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$





EIRP (dBm)	Field Strength at 3m (dB $\mu$ V/m)
- 27	68.3

(3) KDB789033 D02 v02r01 G)2)c)

(i) Sections 15.407(b)(1-3) specifies the unwanted emissions limit for the U-NII-1 and U-NII-2 bands. As specified, emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit of -27 dBm/MHz.

(ii) Section 15.407(b)(4) specifies the unwanted emissions limit for the U-NII-3 band. A band emissions mask is specified in Section 15.407(b)(4)(i). The emission limits are based on the use of a peak detector.

### 3.4.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

### 3.4.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section G) Unwanted emissions measurement.

(1) Procedure for Unwanted Emissions Measurements Below 1000 MHz

- RBW = 120 kHz
- VBW = 300 kHz
- Detector = Peak
- Trace mode = max hold

(2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz

- RBW = 1 MHz
- VBW  $\geq$  3 MHz
- Detector = Peak
- Sweep time = auto
- Trace mode = max hold


(3) Procedures for Average Unwanted Emissions Measurements Above 1000 MHz

- RBW = 1 MHz
- VBW = 10 Hz, when duty cycle is no less than 98 percent.
- VBW  $\geq$  1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.


2. The EUT is placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
3. The EUT is set 3 meters away from the receiving antenna which is mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT is arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Radiated testing below 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading. When there is no suspected emission found and the emission level is with at least 6 dB margin against QP limit line, the position is marked as “-”.
7. Radiated testing above 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading for scanning all frequencies. When there is no suspected emission found and the harmonic emission level is with at least 6 dB margin against average limit line, the position is marked as “-”.

### 3.4.4 Test Setup


For radiated emissions below 30MHz

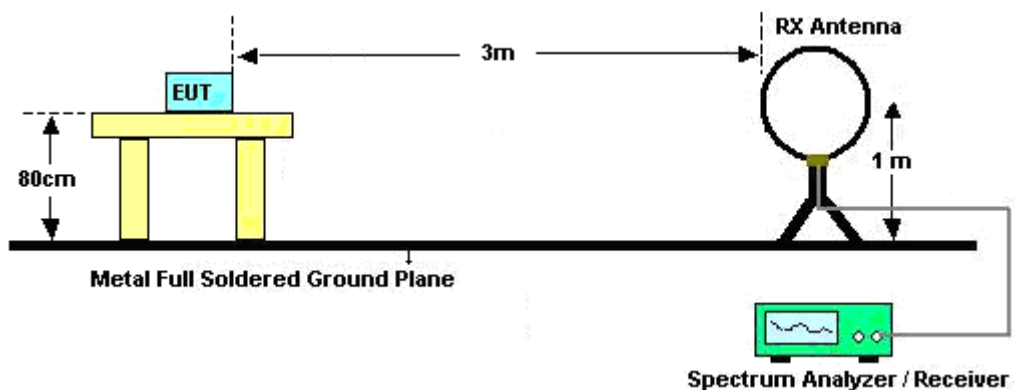


For radiated emissions from 30MHz to 1GHz

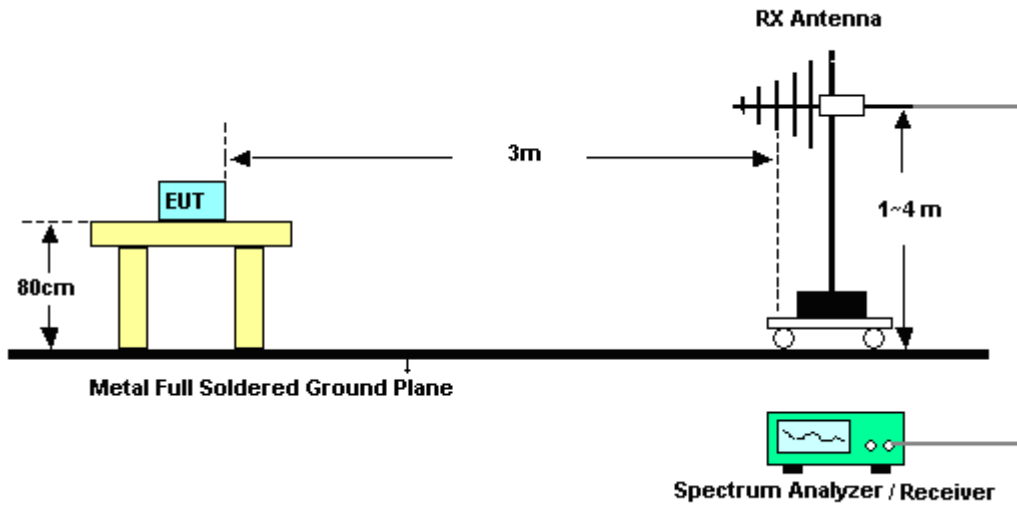

For radiated test from 1GHz to 18GHz

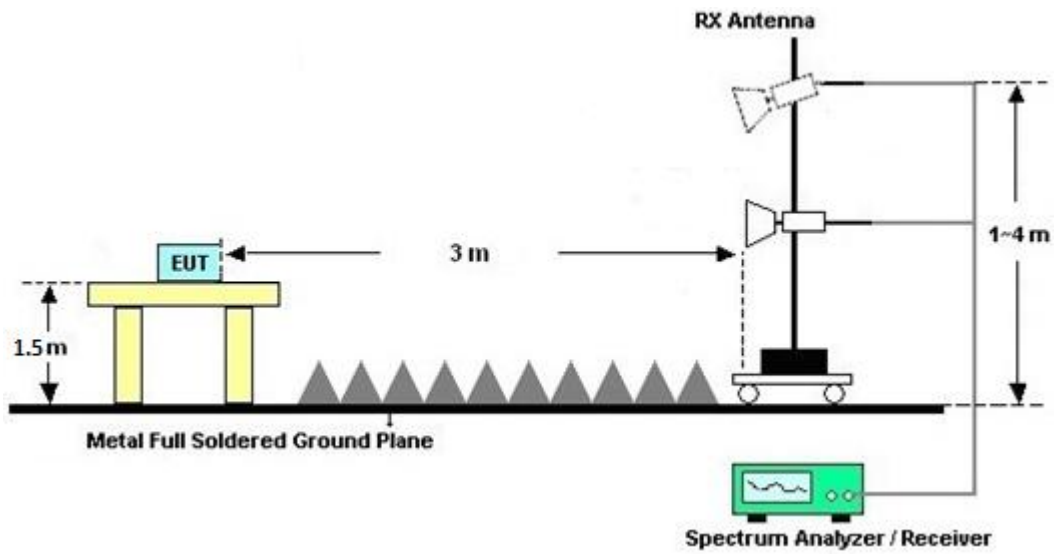

For radiated test above 18GHz

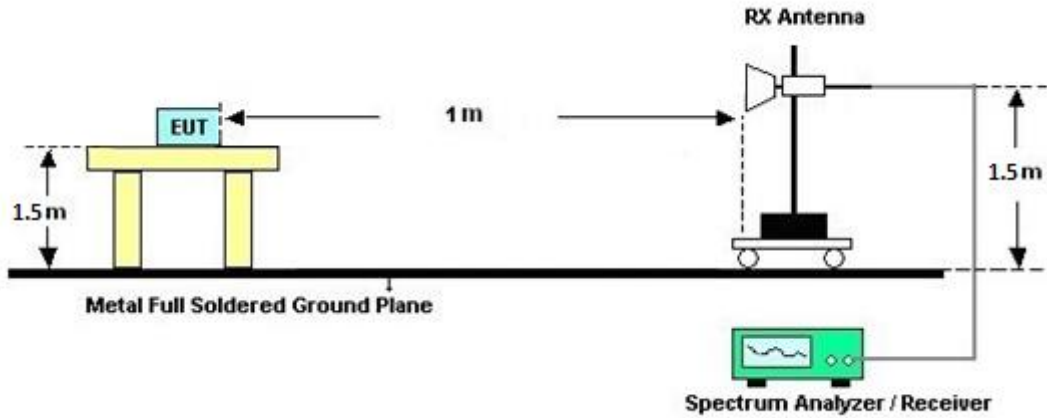

### 3.4.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which starts from 9 kHz to 30 MHz, is pre-scanned and the result which is 20 dB lower than the limit line is not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.

### 3.4.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C and D.

### 3.4.7 Duty Cycle

Please refer to Appendix E.

### 3.4.8 Test Result of Radiated Spurious Emissions (30MHz ~ 10th Harmonic)

Please refer to Appendix C and D.



### 3.5 AC Conducted Emission Measurement

#### 3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


#### 3.5.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

#### 3.5.3 Test Procedures

1. The EUT is placed 0.4 meter away from the conducting wall of the shielding room, and is kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN shall be used.
6. Both Line and Neutral shall be tested in order to find out the maximum conducted emission.
7. The frequency range from 150 kHz to 30 MHz is scanned.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

### 3.5.4 Test Setup

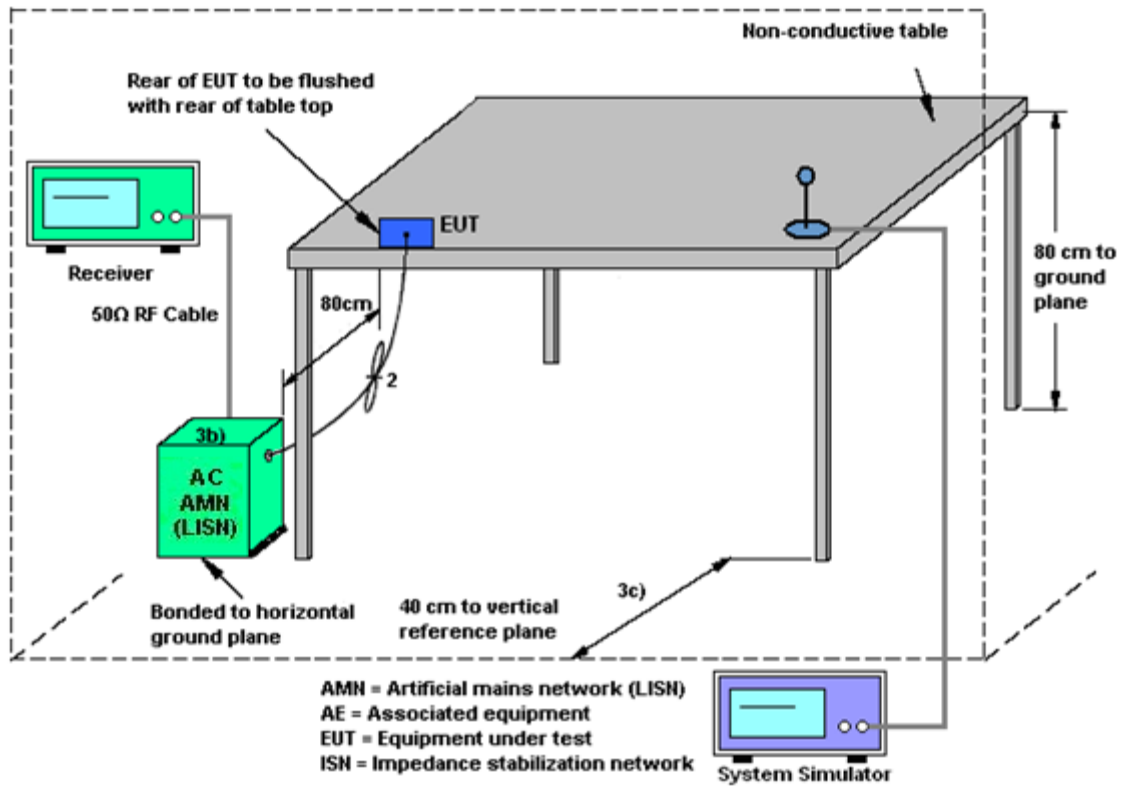

### 3.5.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



## **3.6 Antenna Requirements**

### **3.6.1 Standard Applicable**

The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

### **3.6.2 Antenna Anti-Replacement Construction**

An embedded-in antenna design is used.



## 4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Hygrometer	TECPEL	DTM-303B	TP140325	N/A	Nov. 07, 2022	Apr. 16, 2023 ~ Jun. 07, 2023	Nov. 06, 2023	Radiation (03CH13-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Sep. 20, 2022	Apr. 16, 2023 ~ Jun. 07, 2023	Sep. 19, 2023	Radiation (03CH13-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	803951/2	9K~30M	Mar. 07, 2023	Apr. 16, 2023 ~ Jun. 07, 2023	Mar. 06, 2024	Radiation (03CH13-HY)
Preamplifier	EMEC	EM18G40G	060715	18GHz~40GHz	Dec. 07, 2022	Apr. 16, 2023 ~ Jun. 07, 2023	Dec. 06, 2023	Radiation (03CH13-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA9170	00993	18GHz-40GHz	Nov. 24, 2022	Apr. 16, 2023 ~ Jun. 07, 2023	Nov. 23, 2023	Radiation (03CH13-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	803953/2	30MHz~40GHz	Dec. 20, 2022	Apr. 16, 2023 ~ Jun. 07, 2023	Dec. 19, 2023	Radiation (03CH13-HY)
Amplifier	SONOMA	310N	187282	9kHz~1GHz	Dec. 14, 2022	Apr. 16, 2023 ~ Jun. 07, 2023	Dec. 13, 2023	Radiation (03CH13-HY)
Bilog Antenna	TESEQ	CBL 6111D & 00800N1D01N-06	40103 & 07	30MHz~1GHz	Apr. 24, 2022	Apr. 16, 2023 ~ Apr. 22, 2023	Apr. 23, 2023	Radiation (03CH13-HY)
Bilog Antenna	TESEQ	CBL 6111D & 00800N1D01N-06	40103 & 07	30MHz~1GHz	Apr. 23, 2023	Apr. 23, 2023 ~ Jun. 07, 2023	Apr. 22, 2024	Radiation (03CH13-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-1326	1GHz~18GHz	Aug. 24, 2022	Apr. 16, 2023 ~ Jun. 07, 2023	Aug. 23, 2023	Radiation (03CH13-HY)
Preamplifier	MITEQ	AMF-7D-00101800-30-10P	1590074	1GHz~18GHz	May 17, 2022	Apr. 16, 2023 ~ May 15, 2023	May 16, 2023	Radiation (03CH13-HY)
Preamplifier	MITEQ	AMF-7D-00101800-30-10P	1590074	1GHz~18GHz	May 16, 2023	May 16, 2023 ~ Jun. 07, 2023	May 15, 2024	Radiation (03CH13-HY)
Preamplifier	Keysight	83017A	MY53270147	1GHz~26.5GHz	Oct. 25, 2022	Apr. 16, 2023 ~ Jun. 07, 2023	Oct. 24, 2023	Radiation (03CH13-HY)
Spectrum Analyzer	Keysight	N9010A	MY55370526	10Hz~44GHz	Mar. 23, 2023	Apr. 16, 2023 ~ Jun. 07, 2023	Mar. 22, 2024	Radiation (03CH13-HY)
Filter	Wainwright	WLK4-1000-1530-8000-40SS	SN12	1.53GHz Low Pass Filter	Sep. 13, 2022	Apr. 16, 2023 ~ Jun. 07, 2023	Sep. 12, 2023	Radiation (03CH13-HY)
Filter	Wainwright	WHKX12-2700-3000-18000-60SS	SN2	3GHz High Pass Filter	Jul. 11, 2022	Apr. 16, 2023 ~ Jun. 07, 2023	Jul. 10, 2023	Radiation (03CH13-HY)
Filter	Wainwright	WHKX8-5872.5-6750-18000-40ST	SN5	6.75GHz High Pass Filter	Mar. 09, 2023	Apr. 16, 2023 ~ Jun. 07, 2023	Mar. 08, 2024	Radiation (03CH13-HY)
Filter	Wainwright	WHKX6-7268-9200-26500-40CD	SN4	9GHz High Pass Filter	May 24, 2022	Apr. 16, 2023 ~ May 22, 2023	May 23, 2023	Radiation (03CH13-HY)
Filter	Wainwright	WHKX6-7268-9200-26500-40CD	SN4	9GHz High Pass Filter	May 23, 2023	May 23, 2023 ~ Jun. 07, 2023	May 22, 2024	Radiation (03CH13-HY)
Notch Filter	Wainwright	WRCQV14-5425-5825-6525-6925-60SS	SN1	N/A	Jan. 07, 2023	Apr. 16, 2023 ~ Jun. 07, 2023	Jan. 06, 2024	Radiation (03CH13-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 126E	0030/126E	30MHz~18GHz	Feb. 08, 2023	Apr. 16, 2023 ~ Jun. 07, 2023	Feb. 07, 2024	Radiation (03CH13-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	804793/4	30MHz~18GHz	Feb. 08, 2023	Apr. 16, 2023 ~ Jun. 07, 2023	Feb. 07, 2024	Radiation (03CH13-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY24961/4	30MHz~18GHz	Feb. 08, 2023	Apr. 16, 2023 ~ Jun. 07, 2023	Feb. 07, 2024	Radiation (03CH13-HY)
Controller	EMEC	EM1000	N/A	Control Turn table & Ant Mast	N/A	Apr. 16, 2023 ~ Jun. 07, 2023	N/A	Radiation (03CH13-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1m~4m	N/A	Apr. 16, 2023 ~ Jun. 07, 2023	N/A	Radiation (03CH13-HY)
Turn Table	EMEC	TT2000	N/A	0~360 Degree	N/A	Apr. 16, 2023 ~ Jun. 07, 2023	N/A	Radiation (03CH13-HY)
Software	Audix	N/A	RK-001124	N/A	N/A	Apr. 16, 2023 ~ Jun. 07, 2023	N/A	Radiation (03CH13-HY)





Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Apr. 19, 2023	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102388	9kHz~3.6GHz	Dec. 01, 2022	Apr. 19, 2023	Nov. 30, 2023	Conduction (CO05-HY)
Hygrometer	Testo	608-H1	34913912	N/A	Nov. 17, 2022	Apr. 19, 2023	Nov. 16, 2023	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100081	9kHz~30MHz	Nov. 17, 2022	Apr. 19, 2023	Nov. 16, 2023	Conduction (CO05-HY)
Software	Rohde & Schwarz	EMC32	N/A	N/A	N/A	Apr. 19, 2023	N/A	Conduction (CO05-HY)
Pulse Limiter	SCHWARZBECK	VTSD 9561-F N	00691	N/A	Aug. 01, 2022	Apr. 19, 2023	Jul. 31, 2023	Conduction (CO05-HY)
LISN Cable	MVE	RG-400	260260	N/A	Dec. 29, 2022	Apr. 19, 2023	Dec. 28, 2023	Conduction (CO05-HY)
Hygrometer	TECEPEL	DTM-303A	TP201996	N/A	Nov. 17, 2022	Apr. 13, 2023~ Jun. 07, 2023	Nov. 16, 2023	Conducted (TH05-HY)
Power Sensor	DARE	RPR3006W	16I00054SNO 12 (NO:113)	10MHz~6GHz	Dec. 13, 2022	Apr. 13, 2023~ Jun. 07, 2023	Dec. 12, 2023	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV40	101905	10Hz - 40GHz(amp)	Aug. 03, 2022	Apr. 13, 2023~ Jun. 07, 2023	Aug. 02, 2023	Conducted (TH05-HY)



## 5 Measurement Uncertainty

### Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	3.5 dB
---	--------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	6.5 dB
---	--------

### Uncertainty of Radiated Emission Measurement (1000 MHz ~ 6000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	4.4 dB
---	--------

### Uncertainty of Radiated Emission Measurement (6000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	4.8 dB
---	--------

### Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.3 dB
---	--------

**Appendix A. Test Result of Conducted Test Items**

Test Engineer:	Willy Chang	Temperature:	21~25	°C
Test Date:	2023/04/13~2023/06/07	Relative Humidity:	51~54	%

**TEST RESULTS DATA**  
**26dB and 99% OBW**

U-NII-1 MIMO													
Mod.	Data Rate	N <sub>TX</sub>	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)		Note
					Ant 3	Ant 4	Ant 3	Ant 4	Ant 3	Ant 4	Ant 3	Ant 4	
11a	6Mbps	2	36	5180	17.98	18.98	31.14	38.58	-	-	22.55	-	
11a	6Mbps	2	44	5220	18.13	19.48	32.40	38.64	-	-	22.58	-	
11a	6Mbps	2	48	5240	18.13	19.38	35.88	36.72	-	-	22.58	-	

**TEST RESULTS DATA**  
**Average Power Table**

FCC U-NII-1 MIMO												
Mod.	Data Rate	N <sub>TX</sub>	CH.	Freq. (MHz)	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail
					Ant 3	Ant 4	SUM	Ant 3	Ant 4	Ant 3	Ant 4	
11a	6Mbps	2	36	5180	19.60	20.10	22.87	24.00		-2.00	Pass	
11a	6Mbps	2	44	5220	19.70	19.80	22.76	24.00		-2.00	Pass	
11a	6Mbps	2	48	5240	19.50	20.30	22.93	24.00		-2.00	Pass	
HT20	MCS0	2	36	5180	19.50	20.20	22.87	24.00		-2.00	Pass	
HT20	MCS0	2	44	5220	19.50	20.30	22.93	24.00		-2.00	Pass	
HT20	MCS0	2	48	5240	19.50	20.20	22.87	24.00		-2.00	Pass	
HT40	MCS0	2	38	5190	16.20	17.00	19.63	24.00		-2.00	Pass	
HT40	MCS0	2	46	5230	18.70	19.60	22.18	24.00		-2.00	Pass	
VHT20	MCS0	2	36	5180	19.50	20.20	22.87	24.00		-2.00	Pass	
VHT20	MCS0	2	44	5220	19.50	20.30	22.93	24.00		-2.00	Pass	
VHT20	MCS0	2	48	5240	19.50	20.20	22.87	24.00		-2.00	Pass	
VHT40	MCS0	2	38	5190	16.20	17.00	19.63	24.00		-2.00	Pass	
VHT40	MCS0	2	46	5230	18.70	19.60	22.18	24.00		-2.00	Pass	
VHT80	MCS0	2	42	5210	16.60	17.20	19.92	24.00		-2.00	Pass	
VHT160	MCS0	2	50	5250	14.20	13.70	16.97	24.00		-2.00	Pass	

**TEST RESULTS DATA**  
**Power Spectral Density**

FCC U-NII-1 MIMO												
Mod.	Data Rate	N <sub>TX</sub>	CH.	Freq. (MHz)	Average Power Density with Duty Factor (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)		Pass /Fail
					Ant 3	Ant 4	SUM	Ant 3	Ant 4	Ant 3	Ant 4	
11a	6Mbps	2	36	5180	-		10.80	11.00	-0.19	-	Pass	
11a	6Mbps	2	44	5220			10.88	11.00	-0.19		Pass	
11a	6Mbps	2	48	5240			10.94	11.00	-0.19		Pass	

**TEST RESULTS DATA**  
**26dB and 99% OBW**

U-NII-2A MIMO															
Mod.	Data Rate	N <sub>TX</sub>	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)		FCC 26dB Bandwidth Power Limit (dBm)		Note
					Ant 3	Ant 4	Ant 3	Ant 4	Ant 3	Ant 4	Ant 3	Ant 4	Ant 3	Ant 4	
11a	6Mbps	2	52	5260	17.73	17.58	29.64	32.40	23.45		29.45		23.98	-	
11a	6Mbps	2	60	5300	17.98	17.73	29.22	32.94	23.49		29.49		23.98		
11a	6Mbps	2	64	5320	17.83	17.88	33.60	34.20	23.51		29.51		23.98		

**TEST RESULTS DATA**  
**Average Power Table**

FCC U-NII-2A MIMO													
Mod.	Data Rate	N <sub>TX</sub>	CH.	Freq. (MHz)	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
					Ant 3	Ant 4	SUM	Ant 3	Ant 4	Ant 3	Ant 4		
11a	6Mbps	2	52	5260	19.10	19.20	22.16	23.98		-2.00	30	Pass	
11a	6Mbps	2	60	5300	19.50	19.20	22.36	23.98		-2.00	30	Pass	
11a	6Mbps	2	64	5320	19.20	19.40	22.31	23.98		-2.00	30	Pass	
HT20	MCS0	2	52	5260	19.00	19.10	22.06	23.98		-2.00	30	Pass	
HT20	MCS0	2	60	5300	19.10	19.30	22.21	23.98		-2.00	30	Pass	
HT20	MCS0	2	64	5320	19.20	19.40	22.31	23.98		-2.00	30	Pass	
HT40	MCS0	2	54	5270	18.90	19.40	22.17	23.98		-2.00	30	Pass	
HT40	MCS0	2	62	5310	16.30	16.50	19.41	23.98		-2.00	30	Pass	
VHT20	MCS0	2	52	5260	19.00	19.10	22.06	23.98		-2.00	30	Pass	
VHT20	MCS0	2	60	5300	19.10	19.30	22.21	23.98		-2.00	30	Pass	
VHT20	MCS0	2	64	5320	19.20	19.40	22.31	23.98		-2.00	30	Pass	
VHT40	MCS0	2	54	5270	18.90	19.40	22.17	23.98		-2.00	30	Pass	
VHT40	MCS0	2	62	5310	16.30	16.50	19.41	23.98		-2.00	30	Pass	
VHT80	MCS0	2	58	5290	16.40	16.50	19.46	23.98		-2.00	30	Pass	



**TEST RESULTS DATA**  
**Power Spectral Density**

U-NII-2A MIMO												
Mod.	Data Rate	N <sub>TX</sub>	CH.	Freq. (MHz)	Average Power Density with Duty Factor (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)		Pass /Fail
					Ant 3	Ant 4	SUM	Ant 3	Ant 4	Ant 3	Ant 4	
11a	6Mbps	2	52	5260	-			10.57	11.00	0.11	-	Pass
11a	6Mbps	2	60	5300				10.74	11.00	0.11		Pass
11a	6Mbps	2	64	5320				10.78	11.00	0.11		Pass

**TEST RESULTS DATA**  
**26dB and 99% OBW**

U-NII-2C MIMO																
Mod.	Data Rate	N <sub>TX</sub>	CH.	Freq. (MHz)	99% Bandwidth In U-NII 2C (MHz)		26 dB Bandwidth In U-NII 2C (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)		FCC 26dB Bandwidth Power Limit (dBm)		6 dB Bandwidth for Straddle Channel (MHz)	
					Ant 3	Ant 4	Ant 3	Ant 4	Ant 3	Ant 4	Ant 3	Ant 4	Ant 3	Ant 4	Ant 3	Ant 4
11a	6Mbps	2	100	5500	17.63	17.43	28.44	25.92	23.41	23.41	29.41	29.41	23.98	23.98	----	----
11a	6Mbps	2	116	5580	17.68	17.43	29.16	27.36	23.41	23.41	29.41	29.41	23.98	23.98	----	----
11a	6Mbps	2	140	5700	17.58	17.38	25.38	27.18	23.40	23.40	29.40	29.40	23.98	23.98	----	----

U-NII-2C straddle channel MIMO																
Mod.	Data Rate	N <sub>TX</sub>	CH.	Freq. (MHz)	99% Bandwidth In U-NII 2C (MHz)		26 dB Bandwidth In U-NII 2C (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)		FCC 26dB Bandwidth Power Limit (dBm)		6 dB Bandwidth for Straddle Channel (MHz)	
					Ant 3	Ant 4	Ant 3	Ant 4	Ant 3	Ant 4	Ant 3	Ant 4	Ant 3	Ant 4	Ant 3	Ant 4
11a	6Mbps	2	144	5720	13.74	13.64	17.54	17.24	22.35	22.35	28.35	28.35	23.37	23.37	3.25	3.25

**TEST RESULTS DATA**  
**Average Power Table**

FCC U-NII-2C MIMO													
Mod.	Data Rate	N <sub>TX</sub>	CH.	Freq. (MHz)	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
					Ant 3	Ant 4	SUM	Ant 3	Ant 4	Ant 3	Ant 4		
11a	6Mbps	2	100	5500	19.40	19.00	22.21	23.98		-0.40	30	Pass	
11a	6Mbps	2	116	5580	19.30	18.90	22.11	23.98		-0.40	30	Pass	
11a	6Mbps	2	140	5700	18.90	18.40	21.67	23.98		-0.40	30	Pass	
HT20	MCS0	2	100	5500	19.30	19.10	22.21	23.98		-0.40	30	Pass	
HT20	MCS0	2	116	5580	19.30	18.90	22.11	23.98		-0.40	30	Pass	
HT20	MCS0	2	140	5700	18.20	17.60	20.92	23.98		-0.40	30	Pass	
HT40	MCS0	2	102	5510	15.10	15.30	18.21	23.98		-0.40	30	Pass	
HT40	MCS0	2	110	5550	19.30	18.70	22.02	23.98		-0.40	30	Pass	
HT40	MCS0	2	134	5670	19.00	18.80	21.91	23.98		-0.40	30	Pass	
VHT20	MCS0	2	100	5500	19.30	19.10	22.21	23.98		-0.40	30	Pass	
VHT20	MCS0	2	116	5580	19.30	18.90	22.11	23.98		-0.40	30	Pass	
VHT20	MCS0	2	140	5700	18.20	17.60	20.92	23.98		-0.40	30	Pass	
VHT40	MCS0	2	102	5510	15.10	15.30	18.21	23.98		-0.40	30	Pass	
VHT40	MCS0	2	110	5550	19.30	18.70	22.02	23.98		-0.40	30	Pass	
VHT40	MCS0	2	134	5670	19.00	18.80	21.91	23.98		-0.40	30	Pass	
VHT80	MCS0	2	106	5530	15.90	15.80	18.86	23.98		-0.40	30	Pass	
VHT80	MCS0	2	122	5610	19.30	18.90	22.11	23.98		-0.40	30	Pass	
VHT160	MCS0	2	114	5570	15.50	15.10	18.31	23.98		-0.40	30	Pass	

FCC U-NII-2C straddle channel MIMO													
Mod.	Data Rate	N <sub>TX</sub>	CH.	Freq. (MHz)	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
					Ant 3	Ant 4	SUM	Ant 3	Ant 4	Ant 3	Ant 4		
11a	6Mbps	2	144	5720	19.00	18.50	21.77	23.37		-0.40	30	Pass	
HT20	MCS0	2	144	5720	19.30	18.90	22.11	23.98		-0.40	30	Pass	
HT40	MCS0	2	142	5710	19.20	18.80	22.01	23.98		-0.40	30	Pass	
VHT20	MCS0	2	144	5720	19.30	18.90	22.11	23.98		-0.40	30	Pass	
VHT40	MCS0	2	142	5710	19.20	18.80	22.01	23.98		-0.40	30	Pass	
VHT80	MCS0	2	138	5690	19.30	18.80	22.07	23.98		-0.40	30	Pass	

**TEST RESULTS DATA**  
**Power Spectral Density**

U-NII-2C MIMO													
Mod.	Data Rate	N <sub>TX</sub>	CH.	Freq. (MHz)	Average Power Density with Duty Factor (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)		Pass /Fail	
					Ant 3	Ant 4	SUM	Ant 3	Ant 4	Ant 3	Ant 4		
11a	6Mbps	2	100	5500	-			10.70	11.00	2.41		-	Pass
11a	6Mbps	2	116	5580				10.64	11.00	2.41			Pass
11a	6Mbps	2	140	5700				10.31	11.00	2.41			Pass

U-NII-2C straddle channel MIMO													
Mod.	Data Rate	N <sub>TX</sub>	CH.	Freq. (MHz)	Average Power Density (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)		Pass /Fail	
					Ant 3	Ant 4	SUM	Ant 3	Ant 4	Ant 3	Ant 4		
11a	6Mbps	2	144	5720	-			9.97	11.00	2.41		-	Pass

**TEST RESULTS DATA**  
**Average Power Table**

FCC U-NII-1 MIMO													
Mod.	Data Rate	N <sub>TX</sub>	CH.	Freq. (MHz)	RU Config	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail
						Ant 3	Ant 4	SUM	Ant 3	Ant 4	Ant 3	Ant 4	
HE20	MCS0	2	36	5180	Full	19.50	20.20	22.87	24.00		-2.00		Pass
HE20	MCS0	2	36	5180	26/0	9.80	10.20	13.01	24.00		-2.00		Pass
HE20	MCS0	2	36	5180	52/37	12.40	13.10	15.77	24.00		-2.00		Pass
HE20	MCS0	2	36	5180	106/53	15.70	16.30	19.02	24.00		-2.00		Pass
HE20	MCS0	2	44	5220	Full	19.50	20.30	22.93	24.00		-2.00		Pass
HE20	MCS0	2	44	5220	26/4	10.40	10.70	13.56	24.00		-2.00		Pass
HE20	MCS0	2	44	5220	52/38	12.50	13.00	15.77	24.00		-2.00		Pass
HE20	MCS0	2	44	5220	106/53	15.70	16.30	19.02	24.00		-2.00		Pass
HE20	MCS0	2	48	5240	Full	19.50	20.20	22.87	24.00		-2.00		Pass
HE20	MCS0	2	48	5240	26/8	10.00	10.10	13.06	24.00		-2.00		Pass
HE20	MCS0	2	48	5240	52/40	12.40	12.40	15.41	24.00		-2.00		Pass
HE20	MCS0	2	48	5240	106/54	15.40	16.00	18.72	24.00		-2.00		Pass
HE40	MCS0	2	38	5190	Full	16.20	17.00	19.63	24.00		-2.00		Pass
HE40	MCS0	2	46	5230	Full	18.70	19.60	22.18	24.00		-2.00		Pass
HE80	MCS0	2	42	5210	Full	16.60	17.20	19.92	24.00		-2.00		Pass
HE160	MCS0	2	50	5250	Full	14.20	13.70	16.97	24.00		-2.00		Pass

**TEST RESULTS DATA**  
**Average Power Table**

FCC U-NII-2A MIMO														
Mod.	Data Rate	N <sub>TX</sub>	CH.	Freq. (MHz)	RU Config	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
						Ant 3	Ant 4	SUM	Ant 3	Ant 4	Ant 3	Ant 4		
HE20	MCS0	2	52	5260	Full	19.00	19.10	22.06	23.98		-2.00		30	Pass
HE20	MCS0	2	52	5260	26/0	9.50	9.80	12.66	23.98		-2.00		30	Pass
HE20	MCS0	2	52	5260	52/37	11.50	11.70	14.61	23.98		-2.00		30	Pass
HE20	MCS0	2	52	5260	106/53	15.30	15.20	18.26	23.98		-2.00		30	Pass
HE20	MCS0	2	60	5300	Full	19.10	19.30	22.21	23.98		-2.00		30	Pass
HE20	MCS0	2	60	5300	26/4	10.30	10.50	13.41	23.98		-2.00		30	Pass
HE20	MCS0	2	60	5300	52/38	12.10	12.30	15.21	23.98		-2.00		30	Pass
HE20	MCS0	2	60	5300	106/53	14.80	15.10	17.96	23.98		-2.00		30	Pass
HE20	MCS0	2	64	5320	Full	19.20	19.40	22.31	23.98		-2.00		30	Pass
HE20	MCS0	2	64	5320	26/8	9.10	9.60	12.37	23.98		-2.00		30	Pass
HE20	MCS0	2	64	5320	52/40	11.90	12.20	15.06	23.98		-2.00		30	Pass
HE20	MCS0	2	64	5320	106/54	15.00	15.00	18.01	23.98		-2.00		30	Pass
HE40	MCS0	2	54	5270	Full	18.90	19.40	22.17	23.98		-2.00		30	Pass
HE40	MCS0	2	62	5310	Full	16.30	16.50	19.41	23.98		-2.00		30	Pass
HE80	MCS0	2	58	5290	Full	16.40	16.50	19.46	23.98		-2.00		30	Pass

**TEST RESULTS DATA**  
**Average Power Table**

FCC U-NII-2C MIMO														
Mod.	Data Rate	N <sub>TX</sub>	CH.	Freq. (MHz)	RU Config	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
						Ant 3	Ant 4	SUM	Ant 3	Ant 4	Ant 3	Ant 4		
HE20	MCS0	2	100	5500	Full	19.20	19.10	22.16	23.98		-0.40	30	Pass	
HE20	MCS0	2	100	5500	26/0	10.80	10.90	13.86	23.98		-0.40	30	Pass	
HE20	MCS0	2	100	5500	52/37	11.90	12.20	15.06	23.98		-0.40	30	Pass	
HE20	MCS0	2	100	5500	106/53	15.10	15.70	18.42	23.98		-0.40	30	Pass	
HE20	MCS0	2	116	5580	Full	19.30	18.90	22.11	23.98		-0.40	30	Pass	
HE20	MCS0	2	116	5580	26/4	10.70	11.10	13.91	23.98		-0.40	30	Pass	
HE20	MCS0	2	116	5580	52/38	11.80	12.40	15.12	23.98		-0.40	30	Pass	
HE20	MCS0	2	116	5580	106/53	14.90	15.30	18.11	23.98		-0.40	30	Pass	
HE20	MCS0	2	140	5700	Full	18.20	17.60	20.92	23.98		-0.40	30	Pass	
HE20	MCS0	2	140	5700	26/8	7.90	7.80	10.86	23.98		-0.40	30	Pass	
HE20	MCS0	2	140	5700	52/40	10.60	10.60	13.61	23.98		-0.40	30	Pass	
HE20	MCS0	2	140	5700	106/54	14.00	13.60	16.81	23.98		-0.40	30	Pass	
HE40	MCS0	2	102	5510	Full	15.10	15.30	18.21	23.98		-0.40	30	Pass	
HE40	MCS0	2	110	5550	Full	19.30	18.70	22.02	23.98		-0.40	30	Pass	
HE40	MCS0	2	134	5670	Full	19.00	18.80	21.91	23.98		-0.40	30	Pass	
HE80	MCS0	2	106	5530	Full	15.90	15.80	18.86	23.98		-0.40	30	Pass	
HE80	MCS0	2	122	5610	Full	19.30	18.90	22.11	23.98		-0.40	30	Pass	
HE160	MCS0	2	114	5570	Full	15.50	15.10	18.31	23.98		-0.40	30	Pass	

FCC U-NII-2C straddle channel MIMO														
Mod.	Data Rate	N <sub>TX</sub>	CH.	Freq. (MHz)	RU Config	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
						Ant 3	Ant 4	SUM	Ant 3	Ant 4	Ant 3	Ant 4		
HE20	MCS0	2	144	5720	Full	19.30	18.90	22.11	23.98		-0.40	30	Pass	
HE20	MCS0	2	144	5720	26/8	10.90	9.20	13.14	23.98		-0.40	30	Pass	
HE20	MCS0	2	144	5720	52/40	11.60	11.90	14.76	23.98		-0.40	30	Pass	
HE20	MCS0	2	144	5720	106/54	14.60	15.00	17.81	23.98		-0.40	30	Pass	
HE40	MCS0	2	142	5710	Full	19.20	18.80	22.01	23.98		-0.40	30	Pass	
HE80	MCS0	2	138	5690	Full	19.30	18.80	22.07	23.98		-0.40	30	Pass	

**TEST RESULTS DATA**  
**26dB and 99% OBW**

U-NII-1 MIMO														
Mod.	Data Rate	N <sub>TX</sub>	CH.	Freq. (MHz)	RU Config.	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)		Note
						Ant 3	Ant 4	Ant 3	Ant 4	Ant 3	Ant 4	Ant 3	Ant 4	
EHT20	MCS0	2	36	5180	Full	19.48	19.78	38.40	38.82	-	-	22.90	-	-
EHT20	MCS0	2	44	5220	Full	19.53	20.18	35.88	32.46	-	-	22.91	-	-
EHT20	MCS0	2	48	5240	Full	19.48	19.93	35.34	33.84	-	-	22.90	-	-
EHT40	MCS0	2	38	5190	Full	37.96	38.06	40.20	41.28	-	-	23.01	-	-
EHT40	MCS0	2	46	5230	Full	38.26	38.66	44.16	42.72	-	-	23.01	-	-
EHT80	MCS0	2	42	5210	Full	77.32	77.32	82.56	85.44	-	-	23.01	-	-
EHT160	MCS0	2	50	5250	Full	157.28	157.28	166.56	168.00	-	-	23.01	-	-



**TEST RESULTS DATA**  
**Average Power Table**

FCC U-NII-1 MIMO													
Mod.	Data Rate	N <sub>TX</sub>	CH.	Freq. (MHz)	RU Config.	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail
						Ant 3	Ant 4	SUM	Ant 3	Ant 4	Ant 3	Ant 4	
EHT20	MCS0	2	36	5180	Full	19.60	20.30	22.97	24.00		-2.00	Pass	
EHT20	MCS0	2	36	5180	26/0	9.90	10.30	13.11	24.00		-2.00	Pass	
EHT20	MCS0	2	36	5180	52/37	12.60	13.30	15.97	24.00		-2.00	Pass	
EHT20	MCS0	2	36	5180	106/53	15.90	16.50	19.22	24.00		-2.00	Pass	
EHT20	MCS0	2	36	5180	52T+26T/70	14.60	14.50	17.56	24.00		-2.00	Pass	
EHT20	MCS0	2	36	5180	106T+26T/82	17.40	17.20	20.31	24.00		-2.00	Pass	
EHT20	MCS0	2	44	5220	Full	19.60	20.40	23.03	24.00		-2.00	Pass	
EHT20	MCS0	2	44	5220	26/4	10.50	10.80	13.66	24.00		-2.00	Pass	
EHT20	MCS0	2	44	5220	52/38	12.70	13.20	15.97	24.00		-2.00	Pass	
EHT20	MCS0	2	44	5220	106/53	16.00	16.60	19.32	24.00		-2.00	Pass	
EHT20	MCS0	2	44	5220	52T+26T/71	14.90	14.90	17.91	24.00		-2.00	Pass	
EHT20	MCS0	2	44	5220	106T+26T/83	17.00	16.70	19.86	24.00		-2.00	Pass	
EHT20	MCS0	2	48	5240	Full	19.60	20.50	23.08	24.00		-2.00	Pass	
EHT20	MCS0	2	48	5240	26/8	10.10	10.20	13.16	24.00		-2.00	Pass	
EHT20	MCS0	2	48	5240	52/40	12.50	12.60	15.56	24.00		-2.00	Pass	
EHT20	MCS0	2	48	5240	106/54	15.60	16.10	18.87	24.00		-2.00	Pass	
EHT20	MCS0	2	48	5240	52T+26T/72	15.00	14.70	17.86	24.00		-2.00	Pass	
EHT20	MCS0	2	48	5240	106T+26T/83	17.30	16.80	20.07	24.00		-2.00	Pass	
EHT40	MCS0	2	38	5190	Full	16.50	17.20	19.87	24.00		-2.00	Pass	
EHT40	MCS0	2	46	5230	Full	18.90	19.90	22.44	24.00		-2.00	Pass	
EHT80	MCS0	2	42	5210	Full	16.70	16.40	19.56	24.00		-2.00	Pass	
EHT80	MCS0	2	42	5210	Puncture 20/8	15.40	15.60	18.51	24.00		-2.00	Pass	
EHT160	MCS0	2	50	5250	Full	14.30	13.80	17.07	24.00		-2.00	Pass	
EHT160	MCS0	2	50	5250	Puncture40/19	13.10	12.60	15.87	24.00		-2.00	Pass	
EHT160	MCS0	2	50	5250	Puncture20/12	13.40	13.30	16.36	24.00		-2.00	Pass	

**TEST RESULTS DATA**  
**Power Spectral Density**

FCC U-NII-1 MIMO													
Mod.	Data Rate	N <sub>TX</sub>	CH.	Freq. (MHz)	RU Config.	Average Power Density with Duty Factor (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)		Pass /Fail
						Ant 3	Ant 4	SUM	Ant 3	Ant 4	Ant 3	Ant 4	
EHT20	MCS0	2	36	5180	Full	-	-	10.48	11.00	-0.19	-	-	Pass
EHT20	MCS0	2	36	5180	26/0	-	-	10.31	11.00	-0.19	-	-	Pass
EHT20	MCS0	2	36	5180	52/37	-	-	10.29	11.00	-0.19	-	-	Pass
EHT20	MCS0	2	36	5180	106/53	-	-	10.27	11.00	-0.19	-	-	Pass
EHT20	MCS0	2	36	5180	52T+26T/70	-	-	10.29	11.00	-0.19	-	-	Pass
EHT20	MCS0	2	36	5180	106T+26T/82	-	-	10.40	11.00	-0.19	-	-	Pass
EHT20	MCS0	2	44	5220	Full	-	-	10.56	11.00	-0.19	-	-	Pass
EHT20	MCS0	2	44	5220	26/4	-	-	10.23	11.00	-0.19	-	-	Pass
EHT20	MCS0	2	44	5220	52/38	-	-	10.48	11.00	-0.19	-	-	Pass
EHT20	MCS0	2	44	5220	106/53	-	-	10.35	11.00	-0.19	-	-	Pass
EHT20	MCS0	2	44	5220	52T+26T/71	-	-	10.36	11.00	-0.19	-	-	Pass
EHT20	MCS0	2	44	5220	106T+26T/83	-	-	10.17	11.00	-0.19	-	-	Pass
EHT20	MCS0	2	48	5240	Full	-	-	10.45	11.00	-0.19	-	-	Pass
EHT20	MCS0	2	48	5240	26/8	-	-	10.10	11.00	-0.19	-	-	Pass
EHT20	MCS0	2	48	5240	52/40	-	-	10.01	11.00	-0.19	-	-	Pass
EHT20	MCS0	2	48	5240	106/54	-	-	10.19	11.00	-0.19	-	-	Pass
EHT20	MCS0	2	48	5240	52T+26T/72	-	-	10.40	11.00	-0.19	-	-	Pass
EHT20	MCS0	2	48	5240	106T+26T/83	-	-	10.41	11.00	-0.19	-	-	Pass
EHT40	MCS0	2	38	5190	Full	-	-	4.64	11.00	-0.19	-	-	Pass
EHT40	MCS0	2	46	5230	Full	-	-	7.26	11.00	-0.19	-	-	Pass
EHT80	MCS0	2	42	5210	Full	-	-	2.18	11.00	-0.19	-	-	Pass
EHT80	MCS0	2	42	5210	Puncture 20/8	-	-	1.83	11.00	-0.19	-	-	Pass
EHT160	MCS0	2	50	5250	Full	-	-	-3.58	11.00	-0.19	-	-	Pass
EHT160	MCS0	2	50	5250	Puncture40/19	-	-	-3.68	11.00	-0.19	-	-	Pass
EHT160	MCS0	2	50	5250	Puncture20/12	-	-	-3.62	11.00	-0.19	-	-	Pass

**TEST RESULTS DATA**  
**26dB and 99% OBW**

U-NII-2A MIMO																
Mod.	Data Rate	N <sub>TX</sub>	CH.	Freq. (MHz)	RU Config.	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)		FCC 26dB Bandwidth Power Limit (dBm)		Note
						Ant 3	Ant 4	Ant 3	Ant 4	Ant 3	Ant 4	Ant 3	Ant 4	Ant 3	Ant 4	
EHT20	MCS0	2	52	5260	Full	19.43	19.43	35.64	32.58	23.88		29.88		23.98	-	
EHT20	MCS0	2	60	5300	Full	19.43	19.43	32.82	32.46	23.88		29.88		23.98		
EHT20	MCS0	2	64	5320	Full	19.43	19.43	34.02	30.54	23.88		29.88		23.98		
EHT40	MCS0	2	54	5270	Full	38.36	38.36	63.36	47.76	23.98		30.00		23.98		
EHT40	MCS0	2	62	5310	Full	37.96	38.16	40.32	40.80	23.98		30.00		23.98		
EHT80	MCS0	2	58	5290	Full	77.44	77.32	83.04	82.32	23.98		30.00		23.98		

**TEST RESULTS DATA**  
**Average Power Table**

FCC U-NII-2A MIMO														
Mod.	Data Rate	N <sub>TX</sub>	CH.	Freq. (MHz)	RU Config.	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
						Ant 3	Ant 4	SUM	Ant 3	Ant 4	Ant 3	Ant 4		
EHT20	MCS0	2	52	5260	Full	19.10	19.40	22.26	23.98		-2.00	30	Pass	
EHT20	MCS0	2	52	5260	26/0	9.70	9.90	12.81	23.98		-2.00	30	Pass	
EHT20	MCS0	2	52	5260	52/37	11.80	12.00	14.91	23.98		-2.00	30	Pass	
EHT20	MCS0	2	52	5260	106/53	15.40	15.30	18.36	23.98		-2.00	30	Pass	
EHT20	MCS0	2	52	5260	52T+26T/70	14.10	14.10	17.11	23.98		-2.00	30	Pass	
EHT20	MCS0	2	52	5260	106T+26T/82	16.60	16.30	19.46	23.98		-2.00	30	Pass	
EHT20	MCS0	2	60	5300	Full	19.20	19.40	22.31	23.98		-2.00	30	Pass	
EHT20	MCS0	2	60	5300	26/4	10.50	10.70	13.61	23.98		-2.00	30	Pass	
EHT20	MCS0	2	60	5300	52/38	12.20	12.50	15.36	23.98		-2.00	30	Pass	
EHT20	MCS0	2	60	5300	106/53	15.00	15.20	18.11	23.98		-2.00	30	Pass	
EHT20	MCS0	2	60	5300	52T+26T/71	14.60	14.60	17.61	23.98		-2.00	30	Pass	
EHT20	MCS0	2	60	5300	106T+26T/83	16.70	16.60	19.66	23.98		-2.00	30	Pass	
EHT20	MCS0	2	64	5320	Full	19.30	19.60	22.46	23.98		-2.00	30	Pass	
EHT20	MCS0	2	64	5320	26/8	9.20	9.70	12.47	23.98		-2.00	30	Pass	
EHT20	MCS0	2	64	5320	52/40	12.20	12.30	15.26	23.98		-2.00	30	Pass	
EHT20	MCS0	2	64	5320	106/54	15.10	15.20	18.16	23.98		-2.00	30	Pass	
EHT20	MCS0	2	64	5320	52T+26T/72	14.10	13.90	17.01	23.98		-2.00	30	Pass	
EHT20	MCS0	2	64	5320	106T+26T/83	16.60	16.60	19.61	23.98		-2.00	30	Pass	
EHT40	MCS0	2	54	5270	Full	19.20	19.60	22.41	23.98		-2.00	30	Pass	
EHT40	MCS0	2	62	5310	Full	16.40	16.70	19.56	23.98		-2.00	30	Pass	
EHT80	MCS0	2	58	5290	Full	16.50	16.80	19.66	23.98		-2.00	30	Pass	
EHT80	MCS0	2	58	5290	Puncture 20/1	15.50	15.20	18.36	23.98		-2.00	30	Pass	
EHT160	MCS0	2	50	5250	Full	15.40	15.30	18.36	23.98		-2.00	30	Pass	
EHT160	MCS0	2	50	5250	Puncture40/19	13.90	13.70	16.81	23.98		-2.00	30	Pass	
EHT160	MCS0	2	50	5250	Puncture20/12	14.40	14.10	17.26	23.98		-2.00	30	Pass	

**TEST RESULTS DATA**  
**Power Spectral Density**

U-NII-2A MIMO													
Mod.	Data Rate	N <sub>TX</sub>	CH.	Freq. (MHz)	RU Config.	Average Power Density with Duty Factor (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)		Pass /Fail
						Ant 3	Ant 4	SUM	Ant 3	Ant 4	Ant 3	Ant 4	
EHT20	MCS0	2	52	5260	Full	-	-	9.63	11.00	0.11	-	Pass	
EHT20	MCS0	2	52	5260	26/0	-	-	9.48	11.00	0.11	-	Pass	
EHT20	MCS0	2	52	5260	52/37	-	-	9.10	11.00	0.11	-	Pass	
EHT20	MCS0	2	52	5260	106/53	-	-	9.33	11.00	0.11	-	Pass	
EHT20	MCS0	2	52	5260	52T+26T/70	-	-	9.62	11.00	0.11	-	Pass	
EHT20	MCS0	2	52	5260	106T+26T/82	-	-	9.55	11.00	0.11	-	Pass	
EHT20	MCS0	2	60	5300	Full	-	-	9.71	11.00	0.11	-	Pass	
EHT20	MCS0	2	60	5300	26/4	-	-	9.50	11.00	0.11	-	Pass	
EHT20	MCS0	2	60	5300	52/38	-	-	9.56	11.00	0.11	-	Pass	
EHT20	MCS0	2	60	5300	106/53	-	-	9.44	11.00	0.11	-	Pass	
EHT20	MCS0	2	60	5300	52T+26T/71	-	-	9.97	11.00	0.11	-	Pass	
EHT20	MCS0	2	60	5300	106T+26T/83	-	-	9.68	11.00	0.11	-	Pass	
EHT20	MCS0	2	64	5320	Full	-	-	9.70	11.00	0.11	-	Pass	
EHT20	MCS0	2	64	5320	26/8	-	-	9.61	11.00	0.11	-	Pass	
EHT20	MCS0	2	64	5320	52/40	-	-	9.54	11.00	0.11	-	Pass	
EHT20	MCS0	2	64	5320	106/54	-	-	9.33	11.00	0.11	-	Pass	
EHT20	MCS0	2	64	5320	52T+26T/72	-	-	9.47	11.00	0.11	-	Pass	
EHT20	MCS0	2	64	5320	106T+26T/83	-	-	9.64	11.00	0.11	-	Pass	
EHT40	MCS0	2	54	5270	Full	-	-	7.33	11.00	0.11	-	Pass	
EHT40	MCS0	2	62	5310	Full	-	-	4.22	11.00	0.11	-	Pass	
EHT80	MCS0	2	58	5290	Full	-	-	2.02	11.00	0.11	-	Pass	
EHT80	MCS0	2	58	5290	Puncture 20/1	-	-	1.95	11.00	0.11	-	Pass	
EHT160	MCS0	2	50	5250	Full	-	-	-3.58	11.00	0.11	-	Pass	
EHT160	MCS0	2	50	5250	Puncture40/19	-	-	-3.68	11.00	0.11	-	Pass	
EHT160	MCS0	2	50	5250	Puncture20/12	-	-	-3.62	11.00	0.11	-	Pass	

**TEST RESULTS DATA**  
**26dB and 99% OBW**

U-NII-2C MIMO																	
Mod.	Data Rate	N <sub>TX</sub>	CH.	Freq. (MHz)	RU Config.	99% Bandwidth In U-NII 2C (MHz)		26 dB Bandwidth In U-NII 2C (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)		FCC 26dB Bandwidth Power Limit (dBm)		6 dB Bandwidth for Straddle Channel (MHz)	
						Ant 3	Ant 4	Ant 3	Ant 4	Ant 3	Ant 4	Ant 3	Ant 4	Ant 3	Ant 4	Ant 3	Ant 4
EHT20	MCS0	2	100	5500	Full	19.33	19.38	27.60	28.74	23.86	29.86	23.98	----	----			
EHT20	MCS0	2	116	5580	Full	19.38	19.38	31.14	28.14	23.87	29.87	23.98	----	----			
EHT20	MCS0	2	140	5700	Full	19.23	19.23	22.14	23.46	23.84	29.84	23.98	----	----			
EHT40	MCS0	2	102	5510	Full	37.96	38.06	39.96	40.08	23.98	30.00	23.98	----	----			
EHT40	MCS0	2	110	5550	Full	38.26	38.26	47.52	45.72	23.98	30.00	23.98	----	----			
EHT40	MCS0	2	134	5670	Full	38.26	38.26	43.80	42.00	23.98	30.00	23.98	----	----			
EHT80	MCS0	2	106	5530	Full	77.32	77.08	82.56	82.56	23.98	30.00	23.98	----	----			
EHT80	MCS0	2	122	5610	Full	77.44	77.44	108.96	101.28	23.98	30.00	23.98	----	----			
EHT160	MCS0	2	114	5570	Full	157.28	157.52	166.08	168.00	23.98	30.00	23.98	----	----			

U-NII-2C straddle channel MIMO																	
Mod.	Data Rate	N <sub>TX</sub>	CH.	Freq. (MHz)	RU Config.	99% Bandwidth In U-NII 2C (MHz)		26 dB Bandwidth In U-NII 2C (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)		FCC 26dB Bandwidth Power Limit (dBm)		6 dB Bandwidth for Straddle Channel (MHz)	
						Ant 3	Ant 4	Ant 3	Ant 4	Ant 3	Ant 4	Ant 3	Ant 4	Ant 3	Ant 4	Ant 3	Ant 4
EHT20	MCS0	2	144	5720	Full	14.74	14.69	20.00	19.88	22.67	28.67	23.98	4.45	4.5			
EHT40	MCS0	2	142	5710	Full	34.08	34.08	36.60	38.40	23.98	30.00	23.98	3.9	3.9			
EHT80	MCS0	2	138	5690	Full	73.72	73.72	80.12	89.00	23.98	30.00	23.98	3.88	3.88			

**TEST RESULTS DATA**  
**Average Power Table**

FCC U-NII-2C MIMO														
Mod.	Data Rate	N <sub>TX</sub>	CH.	Freq. (MHz)	RU Config.	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
						Ant 3	Ant 4	SUM	Ant 3	Ant 4	Ant 3	Ant 4		
EHT20	MCS0	2	100	5500	Full	19.50	19.20	22.36	23.98		-0.40	30	Pass	
EHT20	MCS0	2	100	5500	26/0	10.90	11.10	14.01	23.98		-0.40	30	Pass	
EHT20	MCS0	2	100	5500	52/37	12.00	12.40	15.21	23.98		-0.40	30	Pass	
EHT20	MCS0	2	100	5500	106/53	15.30	15.80	18.57	23.98		-0.40	30	Pass	
EHT20	MCS0	2	100	5500	52T+26T/70	13.90	13.90	16.91	23.98		-0.40	30	Pass	
EHT20	MCS0	2	100	5500	106T+26T/82	16.20	15.90	19.06	23.98		-0.40	30	Pass	
EHT20	MCS0	2	116	5580	Full	19.60	19.20	22.41	23.98		-0.40	30	Pass	
EHT20	MCS0	2	116	5580	26/4	10.90	11.20	14.06	23.98		-0.40	30	Pass	
EHT20	MCS0	2	116	5580	52/38	11.90	12.70	15.33	23.98		-0.40	30	Pass	
EHT20	MCS0	2	116	5580	106/53	15.00	15.60	18.32	23.98		-0.40	30	Pass	
EHT20	MCS0	2	116	5580	52T+26T/71	13.90	13.80	16.86	23.98		-0.40	30	Pass	
EHT20	MCS0	2	116	5580	106T+26T/83	16.00	16.10	19.06	23.98		-0.40	30	Pass	
EHT20	MCS0	2	140	5700	Full	18.30	17.90	21.11	23.98		-0.40	30	Pass	
EHT20	MCS0	2	140	5700	26/8	8.00	7.90	10.96	23.98		-0.40	30	Pass	
EHT20	MCS0	2	140	5700	52/40	10.70	10.70	13.71	23.98		-0.40	30	Pass	
EHT20	MCS0	2	140	5700	106/54	14.10	13.70	16.91	23.98		-0.40	30	Pass	
EHT20	MCS0	2	140	5700	52T+26T/72	12.70	12.50	14.21	23.98		-0.40	30	Pass	
EHT20	MCS0	2	140	5700	106T+26T/83	15.00	14.80	16.36	23.98		-0.40	30	Pass	
EHT40	MCS0	2	102	5510	Full	15.90	15.60	18.76	23.98		-0.40	30	Pass	
EHT40	MCS0	2	110	5550	Full	19.40	19.20	22.31	23.98		-0.40	30	Pass	
EHT40	MCS0	2	134	5670	Full	19.40	19.00	22.21	23.98		-0.40	30	Pass	
EHT80	MCS0	2	106	5530	Full	16.10	15.90	19.01	23.98		-0.40	30	Pass	
EHT80	MCS0	2	106	5530	Puncture 20/8	15.20	14.90	18.71	23.98		-0.40	30	Pass	
EHT80	MCS0	2	122	5610	Full	19.40	19.10	22.26	23.98		-0.40	30	Pass	
EHT80	MCS0	2	122	5610	Puncture 20/4	18.30	17.80	20.07	23.98		-0.40	30	Pass	
EHT80	MCS0	2	122	5610	Puncture 20/2	18.20	17.80	20.01	23.98		-0.40	30	Pass	
EHT160	MCS0	2	114	5570	Full	15.40	15.30	18.36	23.98		-0.40	30	Pass	
EHT160	MCS0	2	114	5570	Puncture40/3	13.90	13.70	16.81	23.98		-0.40	30	Pass	
EHT160	MCS0	2	114	5570	Puncture20/1	14.40	14.10	17.26	23.98		-0.40	30	Pass	

FCC U-NII-2C straddle channel MIMO														
Mod.	Data Rate	N <sub>TX</sub>	CH.	Freq. (MHz)	RU Config.	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
						Ant 3	Ant 4	SUM	Ant 3	Ant 4	Ant 3	Ant 4		
EHT20	MCS0	2	144	5720	Full	19.40	19.10	22.26	23.98		-0.40	30	Pass	
EHT20	MCS0	2	144	5720	26/8	11.00	9.40	13.28	23.98		-0.40	30	Pass	
EHT20	MCS0	2	144	5720	52/40	11.80	12.00	14.91	23.98		-0.40	30	Pass	
EHT20	MCS0	2	144	5720	106/54	14.90	15.20	18.06	23.98		-0.40	30	Pass	
EHT20	MCS0	2	144	5720	52T+26T/72	13.80	13.50	16.66	23.98		-0.40	30	Pass	
EHT20	MCS0	2	144	5720	106T+26T/83	16.30	16.20	19.26	23.98		-0.40	30	Pass	
EHT40	MCS0	2	142	5710	Full	19.40	18.90	22.17	23.98		-0.40	30	Pass	
EHT80	MCS0	2	138	5690	Full	19.40	19.10	22.26	23.98		-0.40	30	Pass	
EHT80	MCS0	2	138	5690	Puncture 20/1	17.90	17.50	20.71	23.98		-0.40	30	Pass	

**TEST RESULTS DATA**  
**Power Spectral Density**

U-NII-2C MIMO													
Mod.	Data Rate	N <sub>TX</sub>	CH.	Freq. (MHz)	RU Config.	Average Power Density with Duty Factor (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)		Pass /Fail
						Ant 3	Ant 4	SUM	Ant 3	Ant 4	Ant 3	Ant 4	
EHT20	MCS0	2	100	5500	Full	-	-	9.43	11.00	2.41	-	Pass	
EHT20	MCS0	2	100	5500	26/0	-	-	9.21	11.00	2.41	-	Pass	
EHT20	MCS0	2	100	5500	52/37	-	-	9.23	11.00	2.41	-	Pass	
EHT20	MCS0	2	100	5500	106/53	-	-	9.36	11.00	2.41	-	Pass	
EHT20	MCS0	2	100	5500	52T+26T/70	-	-	9.33	11.00	2.41	-	Pass	
EHT20	MCS0	2	100	5500	106T+26T/82	-	-	9.23	11.00	2.41	-	Pass	
EHT20	MCS0	2	116	5580	Full	-	-	9.49	11.00	2.41	-	Pass	
EHT20	MCS0	2	116	5580	26/4	-	-	9.38	11.00	2.41	-	Pass	
EHT20	MCS0	2	116	5580	52/38	-	-	9.44	11.00	2.41	-	Pass	
EHT20	MCS0	2	116	5580	106/53	-	-	9.37	11.00	2.41	-	Pass	
EHT20	MCS0	2	116	5580	52T+26T/71	-	-	9.24	11.00	2.41	-	Pass	
EHT20	MCS0	2	116	5580	106T+26T/83	-	-	9.38	11.00	2.41	-	Pass	
EHT20	MCS0	2	140	5700	Full	-	-	7.06	11.00	2.41	-	Pass	
EHT20	MCS0	2	140	5700	26/8	-	-	6.96	11.00	2.41	-	Pass	
EHT20	MCS0	2	140	5700	52/40	-	-	7.04	11.00	2.41	-	Pass	
EHT20	MCS0	2	140	5700	106/54	-	-	6.89	11.00	2.41	-	Pass	
EHT20	MCS0	2	140	5700	52T+26T/72	-	-	6.97	11.00	2.41	-	Pass	
EHT20	MCS0	2	140	5700	106T+26T/83	-	-	6.81	11.00	2.41	-	Pass	
EHT40	MCS0	2	102	5510	Full	-	-	3.04	11.00	2.41	-	Pass	
EHT40	MCS0	2	110	5550	Full	-	-	7.08	11.00	2.41	-	Pass	
EHT40	MCS0	2	134	5670	Full	-	-	6.86	11.00	2.41	-	Pass	
EHT80	MCS0	2	106	5530	Full	-	-	1.13	11.00	2.41	-	Pass	
EHT80	MCS0	2	106	5530	Puncture 20/8	-	-	1.12	11.00	2.41	-	Pass	
EHT80	MCS0	2	122	5610	Full	-	-	4.48	11.00	2.41	-	Pass	
EHT80	MCS0	2	122	5610	Puncture 20/4	-	-	4.47	11.00	2.41	-	Pass	
EHT80	MCS0	2	122	5610	Puncture 20/2	-	-	4.41	11.00	2.41	-	Pass	
EHT160	MCS0	2	114	5570	Full	-	-	-2.34	11.00	2.41	-	Pass	
EHT160	MCS0	2	114	5570	Puncture40/3	-	-	-2.62	11.00	2.41	-	Pass	
EHT160	MCS0	2	114	5570	Puncture20/1	-	-	-2.77	11.00	2.41	-	Pass	

U-NII-2C straddle channel MIMO													
Mod.	Data Rate	N <sub>TX</sub>	CH.	Freq. (MHz)	RU Config.	Average Power Density (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)		Pass /Fail
						Ant 3	Ant 4	SUM	Ant 3	Ant 4	Ant 3	Ant 4	
EHT20	MCS0	2	144	5720	Full	-	-	9.61	11.00	2.41	-	Pass	
EHT20	MCS0	2	144	5720	26/8	-	-	9.48	11.00	2.41	-	Pass	
EHT20	MCS0	2	144	5720	52/40	-	-	9.27	11.00	2.41	-	Pass	
EHT20	MCS0	2	144	5720	106/54	-	-	9.37	11.00	2.41	-	Pass	
EHT20	MCS0	2	144	5720	52T+26T/72	-	-	9.41	11.00	2.41	-	Pass	
EHT20	MCS0	2	144	5720	106T+26T/83	-	-	9.46	11.00	2.41	-	Pass	
EHT40	MCS0	2	142	5710	Full	-	-	7.10	11.00	2.41	-	Pass	
EHT80	MCS0	2	138	5690	Full	-	-	4.55	11.00	2.41	-	Pass	
EHT80	MCS0	2	138	5690	Puncture 20/1	-	-	4.28	11.00	2.41	-	Pass	



**TEST RESULTS DATA**  
**6dB and 26dB EBW and 99% OBW**

U-NII-3 MIMO												
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26dB Bandwidth (MHz)		6 dB Bandwidth (MHz)		6 dB Bandwidth Min. Limit (MHz)	Pass/Fail
					Ant 3	Ant 4	Ant 3	Ant 4	Ant 3	Ant 4		
11a	6Mbps	2	149	5745	17.58	17.18	29.64	24.18	16.45	16.45	0.5	Pass
11a	6Mbps	2	157	5785	17.58	17.18	28.20	23.46	16.45	16.45	0.5	Pass
11a	6Mbps	2	165	5825	17.48	17.08	26.40	22.86	16.45	16.50	0.5	Pass

**TEST RESULTS DATA**  
**Average Power Table**

U-NII-3 MIMO												
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail
					Ant 3	Ant 4	SUM	Ant 3	Ant 4	Ant 3	Ant 4	
11a	6Mbps	2	149	5745	18.80	18.50	21.66	30.00		-0.60	Pass	
11a	6Mbps	2	157	5785	18.80	18.30	21.57	30.00		-0.60	Pass	
11a	6Mbps	2	165	5825	18.80	18.40	21.61	30.00		-0.60	Pass	
HT20	MCS0	2	149	5745	18.90	17.90	21.44	30.00		-0.60	Pass	
HT20	MCS0	2	157	5785	18.80	17.80	21.34	30.00		-0.60	Pass	
HT20	MCS0	2	165	5825	18.80	18.00	21.43	30.00		-0.60	Pass	
HT40	MCS0	2	151	5755	19.50	18.70	22.13	30.00		-0.60	Pass	
HT40	MCS0	2	159	5795	19.60	19.00	22.32	30.00		-0.60	Pass	
VHT20	MCS0	2	149	5745	18.80	17.90	21.38	30.00		-0.60	Pass	
VHT20	MCS0	2	157	5785	18.70	17.80	21.28	30.00		-0.60	Pass	
VHT20	MCS0	2	165	5825	18.70	18.00	21.37	30.00		-0.60	Pass	
VHT40	MCS0	2	151	5755	19.50	18.70	22.13	30.00		-0.60	Pass	
VHT40	MCS0	2	159	5795	19.60	19.00	22.32	30.00		-0.60	Pass	
VHT80	MCS0	2	155	5775	19.40	19.00	22.21	30.00		-0.60	Pass	
VHT160	MCS0	2	163	5815	26.00	25.70	28.86	30.00		-0.60	Pass	

**TEST RESULTS DATA**  
**Power Spectral Density**

U-NII-3 MIMO																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		10log (500kHz /RBW) Factor (dB)		Average Power Density (dBm/500kHz)			Average PSD Limit (dBm/500kHz)		DG (dBi)		Pass /Fail
					Ant 1	Ant 2	Ant 3	Ant 4	Ant 3	Ant 4	SUM	Ant 3	Ant 4	Ant 3	Ant 4	
11a	6Mbps	2	149	5745	0.29	0.30	2.22		3.68	3.39	6.69	30.00		2.02		Pass
11a	6Mbps	2	157	5785	0.29	0.30	2.22		3.93	3.47	6.94	30.00		2.02		Pass
11a	6Mbps	2	165	5825	0.29	0.30	2.22		3.98	3.45	6.99	30.00		2.02		Pass

Note: PSD Sum = Max PSD(Ant. 1, Ant. 2) + 10 log (n)

**TEST RESULTS DATA**  
**Average Power Table**

U-NII-3 MIMO													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail
						Ant 3	Ant 4	SUM	Ant 3	Ant 4	Ant 3	Ant 4	
HE20	MCS0	2	149	5745	Full	18.90	17.90	21.44	30.00		-0.60		Pass
HE20	MCS0	2	149	5745	26/0	8.70	9.00	11.86	30.00		-0.60		Pass
HE20	MCS0	2	149	5745	52/37	12.00	11.90	14.96	30.00		-0.60		Pass
HE20	MCS0	2	149	5745	106/53	15.30	15.10	18.21	30.00		-0.60		Pass
HE20	MCS0	2	157	5785	Full	18.80	17.80	21.34	30.00		-0.60		Pass
HE20	MCS0	2	157	5785	26/4	9.20	9.20	12.21	30.00		-0.60		Pass
HE20	MCS0	2	157	5785	52/38	12.50	12.20	15.36	30.00		-0.60		Pass
HE20	MCS0	2	157	5785	106/53	15.50	15.20	18.36	30.00		-0.60		Pass
HE20	MCS0	2	165	5825	Full	18.80	18.00	21.43	30.00		-0.60		Pass
HE20	MCS0	2	165	5825	26/8	9.30	9.20	12.26	30.00		-0.60		Pass
HE20	MCS0	2	165	5825	52/40	12.10	11.70	14.91	30.00		-0.60		Pass
HE20	MCS0	2	165	5825	106/54	15.50	15.20	18.36	30.00		-0.60		Pass
HE40	MCS0	2	151	5755	Full	19.50	18.70	22.13	30.00		-0.60		Pass
HE40	MCS0	2	159	5795	Full	19.60	19.00	22.32	30.00		-0.60		Pass
HE80	MCS0	2	155	5775	Full	19.40	19.00	22.21	30.00		-0.60		Pass
HE160	MCS0	2	163	5815	Full	26.00	25.70	28.86	30.00		-0.60		Pass

**TEST RESULTS DATA**  
**6dB and 26dB EBW and 99% OBW**

U-NII-3 MIMO													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config	99% Bandwidth (MHz)		26dB Bandwidth (MHz)		6 dB Bandwidth (MHz)		6 dB Bandwidth Min. Limit (MHz)	Pass/Fail
						Ant 3	Ant 4	Ant 3	Ant 4	Ant 3	Ant 4		
EHT20	MCS0	2	149	5745	Full	19.33	19.23	27.48	23.94	19.10	19.00	0.5	Pass
EHT20	MCS0	2	157	5785	Full	19.33	19.28	27.84	25.14	19.00	19.05	0.5	Pass
EHT20	MCS0	2	165	5825	Full	19.33	19.18	24.60	24.54	19.15	19.05	0.5	Pass
EHT40	MCS0	2	151	5755	Full	38.26	38.26	43.56	41.28	37.89	37.89	0.5	Pass
EHT40	MCS0	2	159	5795	Full	38.36	38.36	42.96	45.84	37.98	37.89	0.5	Pass
EHT80	MCS0	2	155	5775	Full	77.44	77.44	106.32	97.44	77.76	77.60	0.5	Pass

**TEST RESULTS DATA**  
**Average Power Table**

U-NII-3 MIMO													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail
						Ant 3	Ant 4	SUM	Ant 3	Ant 4	Ant 3	Ant 4	
EHT20	MCS0	2	149	5745	Full	19.10	18.10	21.64	30.00		-0.60	Pass	
EHT20	MCS0	2	149	5745	26/0	8.80	9.20	12.01	30.00		-0.60	Pass	
EHT20	MCS0	2	149	5745	52/37	12.20	12.00	15.11	30.00		-0.60	Pass	
EHT20	MCS0	2	149	5745	106/53	15.60	15.20	18.41	30.00		-0.60	Pass	
EHT20	MCS0	2	149	5745	MRU 52T+26T/70	13.70	13.80	16.76	30.00		-0.60	Pass	
EHT20	MCS0	2	149	5745	MRU 106T+26T/82	16.20	16.20	19.21	30.00		-0.60	Pass	
EHT20	MCS0	2	157	5785	Full	19.00	18.00	21.54	30.00		-0.60	Pass	
EHT20	MCS0	2	157	5785	26/4	9.30	9.40	12.36	30.00		-0.60	Pass	
EHT20	MCS0	2	157	5785	52/38	12.60	12.50	15.56	30.00		-0.60	Pass	
EHT20	MCS0	2	157	5785	106/53	15.60	15.30	18.46	30.00		-0.60	Pass	
EHT20	MCS0	2	157	5785	MRU 52T+26T/71	14.00	13.90	16.96	30.00		-0.60	Pass	
EHT20	MCS0	2	157	5785	MRU 106T+26T/83	16.20	15.90	19.06	30.00		-0.60	Pass	
EHT20	MCS0	2	165	5825	Full	19.00	18.10	21.58	30.00		-0.60	Pass	
EHT20	MCS0	2	165	5825	26/8	9.40	9.30	12.36	30.00		-0.60	Pass	
EHT20	MCS0	2	165	5825	52/40	12.30	11.90	15.11	30.00		-0.60	Pass	
EHT20	MCS0	2	165	5825	106/54	15.70	15.40	18.56	30.00		-0.60	Pass	
EHT20	MCS0	2	165	5825	MRU 52T+26T/72	14.00	13.90	16.96	30.00		-0.60	Pass	
EHT20	MCS0	2	165	5825	MRU 106T+26T/83	16.20	16.10	19.16	30.00		-0.60	Pass	
EHT40	MCS0	2	151	5755	Full	19.80	18.80	22.34	30.00		-0.60	Pass	
EHT40	MCS0	2	159	5795	Full	19.80	19.30	22.57	30.00		-0.60	Pass	
EHT80	MCS0	2	155	5775	Full	19.50	19.30	22.41	30.00		-0.60	Pass	
EHT80	MCS0	2	155	5775	Puncture 20/1	17.60	17.10	20.37	30.00		-0.60	Pass	

**TEST RESULTS DATA**  
**Power Spectral Density**

U-NII-3 MIMO																	
Mod.	Data Rate	N <sub>TX</sub>	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		10log (500kHz /RBW) Factor (dB)		Average Power Density (dBm/500kHz)			Average PSD Limit (dBm/500kHz)		DG (dBi)		Pass /Fail
						Ant 1	Ant 2	Ant 3	Ant 4	Ant 3	Ant 4	SUM	Ant 3	Ant 4	Ant 3	Ant 4	
EHT20	MCS0	2	149	5745	Full	0.18	0.18	2.22	3.26	2.11	6.27	30.00	2.02	Pass			
EHT20	MCS0	2	149	5745	26/0	0.50	0.48	2.22	2.97	3.13	6.14	30.00	2.02	Pass			
EHT20	MCS0	2	149	5745	52/37	0.53	0.53	2.22	3.14	2.95	6.15	30.00	2.02	Pass			
EHT20	MCS0	2	149	5745	106/53	0.58	0.58	2.22	3.09	2.83	6.10	30.00	2.02	Pass			
EHT20	MCS0	2	149	5745	MRU 52T+26T/70	0.24	0.26	2.22	3.21	3.19	6.22	30.00	2.02	Pass			
EHT20	MCS0	2	149	5745	MRU 106T+26T/82	0.40	0.40	2.22	3.23	3.08	6.24	30.00	2.02	Pass			
EHT20	MCS0	2	157	5785	Full	0.18	0.18	2.22	3.58	2.37	6.59	30.00	2.02	Pass			
EHT20	MCS0	2	157	5785	26/4	0.50	0.48	2.22	3.48	3.50	6.51	30.00	2.02	Pass			
EHT20	MCS0	2	157	5785	52/38	0.53	0.53	2.22	3.36	3.27	6.37	30.00	2.02	Pass			
EHT20	MCS0	2	157	5785	106/53	0.58	0.58	2.22	3.35	2.98	6.36	30.00	2.02	Pass			
EHT20	MCS0	2	157	5785	MRU 52T+26T/71	0.24	0.26	2.22	3.52	3.45	6.53	30.00	2.02	Pass			
EHT20	MCS0	2	157	5785	MRU 106T+26T/83	0.40	0.40	2.22	3.23	3.09	6.24	30.00	2.02	Pass			
EHT20	MCS0	2	165	5825	Full	0.18	0.18	2.22	3.51	2.15	6.52	30.00	2.02	Pass			
EHT20	MCS0	2	165	5825	26/8	0.50	0.48	2.22	3.42	3.24	6.43	30.00	2.02	Pass			
EHT20	MCS0	2	165	5825	52/40	0.53	0.53	2.22	3.36	2.93	6.37	30.00	2.02	Pass			
EHT20	MCS0	2	165	5825	106/54	0.58	0.58	2.22	3.46	2.97	6.47	30.00	2.02	Pass			
EHT20	MCS0	2	165	5825	MRU 52T+26T/72	0.24	0.26	2.22	3.35	3.23	6.36	30.00	2.02	Pass			
EHT20	MCS0	2	165	5825	MRU 106T+26T/83	0.40	0.40	2.22	3.39	3.01	6.40	30.00	2.02	Pass			
EHT40	MCS0	2	151	5755	Full	0.41	0.41	2.22	0.55	0.43	3.56	30.00	2.02	Pass			
EHT40	MCS0	2	159	5795	Full	0.41	0.41	2.22	1.17	0.70	4.18	30.00	2.02	Pass			
EHT80	MCS0	2	155	5775	Full	0.63	0.63	2.22	-1.89	-1.91	1.12	30.00	2.02	Pass			
EHT80	MCS0	2	155	5775	Puncture 20/1	0.31	0.33	2.22	-2.09	-2.64	0.92	30.00	2.02	Pass			

Note: PSD Sum = Max PSD(Ant. 1, Ant. 2) + 10 log (n)



## Appendix B. AC Conducted Emission Test Results


Test Engineer :	Calvin Wang	Temperature :	23~26°C
		Relative Humidity :	45~55%



# EUT Information

Report NO : 2D0206-03  
 Test Mode : Mode 1  
 Test Voltage : 120Vac/60Hz  
 Phase : Line

Full Spectrum

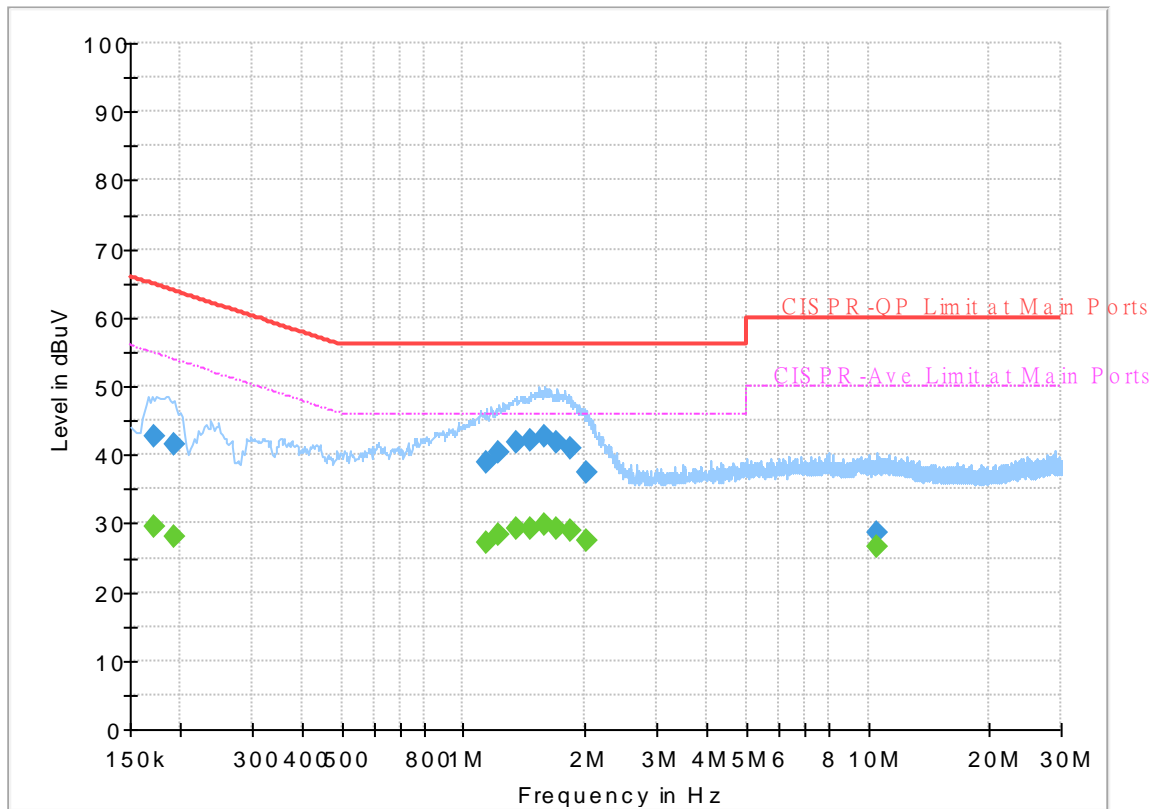

## Final\_Result


Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.172500	---	29.65	54.84	25.19	L1	OFF	19.9
0.172500	42.73	---	64.84	22.11	L1	OFF	19.9
0.192750	---	28.05	53.92	25.87	L1	OFF	19.9
0.192750	41.41	---	63.92	22.51	L1	OFF	19.9
1.142250	---	27.31	46.00	18.69	L1	OFF	19.9
1.142250	38.75	---	56.00	17.25	L1	OFF	19.9
1.225500	---	28.25	46.00	17.75	L1	OFF	19.9
1.225500	40.24	---	56.00	15.76	L1	OFF	19.9
1.349250	---	29.29	46.00	16.71	L1	OFF	19.9
1.349250	41.94	---	56.00	14.06	L1	OFF	19.9
1.468500	---	29.14	46.00	16.86	L1	OFF	19.9
1.468500	42.05	---	56.00	13.95	L1	OFF	19.9
1.585500	---	29.92	46.00	16.08	L1	OFF	19.9
1.585500	42.76	---	56.00	13.24	L1	OFF	19.9
1.707000	---	29.22	46.00	16.78	L1	OFF	19.9
1.707000	41.71	---	56.00	14.29	L1	OFF	19.9
1.842000	---	28.81	46.00	17.19	L1	OFF	19.9
1.842000	40.89	---	56.00	15.11	L1	OFF	19.9
2.019750	---	27.42	46.00	18.58	L1	OFF	19.9
2.019750	37.31	---	56.00	18.69	L1	OFF	19.9
10.513500	---	26.65	50.00	23.35	L1	OFF	20.3

10.513500	28.72	---	60.00	31.28	L1	OFF	20.3
-----------	-------	-----	-------	-------	----	-----	------

## EUT Information

Report NO : 2D0206-03  
 Test Mode : Mode 1  
 Test Voltage : 120Vac/60Hz  
 Phase : Neutral

Full Spectrum

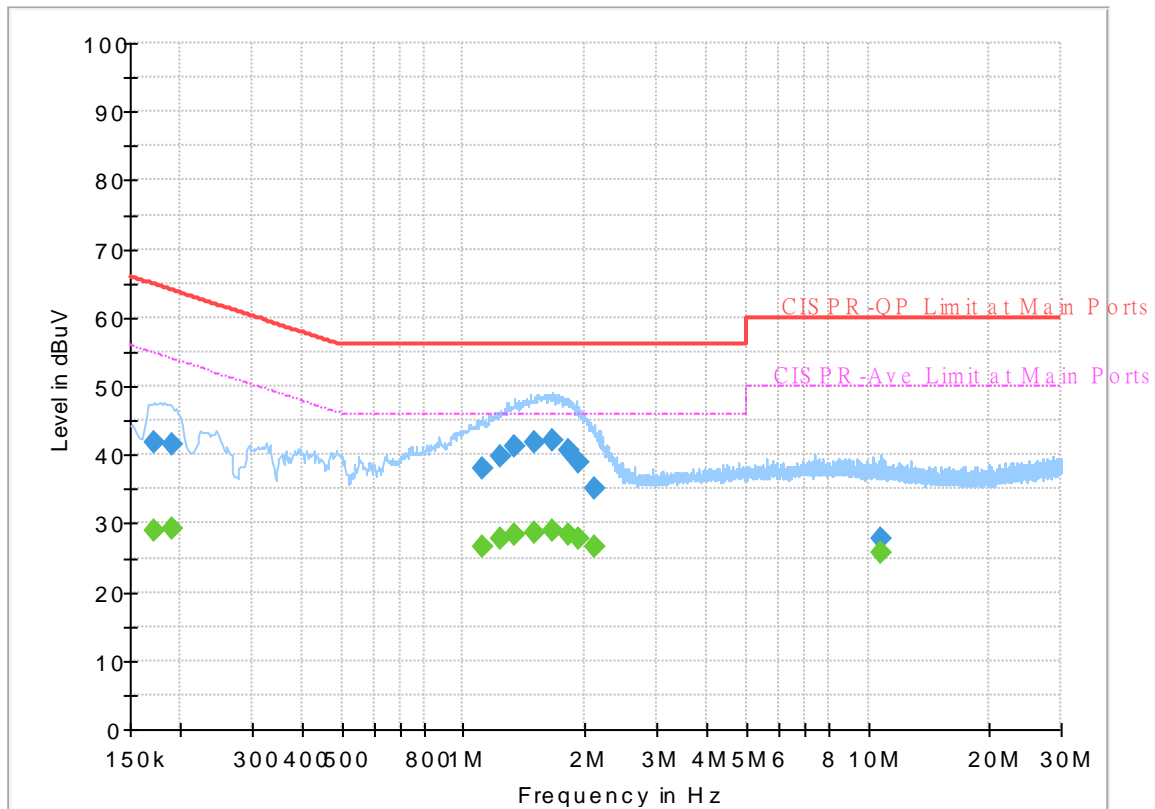

## Final\_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.172500	---	29.07	54.84	25.77	N	OFF	19.9
0.172500	41.82	---	64.84	23.02	N	OFF	19.9
0.190500	---	29.13	54.02	24.89	N	OFF	19.9
0.190500	41.44	---	64.02	22.58	N	OFF	19.9
1.113000	---	26.70	46.00	19.30	N	OFF	19.9
1.113000	38.04	---	56.00	17.96	N	OFF	19.9
1.239000	---	27.65	46.00	18.35	N	OFF	19.9
1.239000	39.68	---	56.00	16.32	N	OFF	19.9
1.335750	---	28.39	46.00	17.61	N	OFF	19.9
1.335750	41.10	---	56.00	14.90	N	OFF	19.9
1.504500	---	28.64	46.00	17.36	N	OFF	19.9
1.504500	41.71	---	56.00	14.29	N	OFF	19.9
1.657500	---	29.03	46.00	16.97	N	OFF	19.9
1.657500	42.13	---	56.00	13.87	N	OFF	19.9
1.812750	---	28.39	46.00	17.61	N	OFF	19.9
1.812750	40.61	---	56.00	15.39	N	OFF	19.9
1.927500	---	27.70	46.00	18.30	N	OFF	19.9
1.927500	38.83	---	56.00	17.17	N	OFF	19.9
2.105250	---	26.54	46.00	19.46	N	OFF	19.9
2.105250	34.96	---	56.00	21.04	N	OFF	19.9
10.704750	---	25.85	50.00	24.15	N	OFF	20.3

10.704750	27.81	---	60.00	32.19	N	OFF	20.3
-----------	-------	-----	-------	-------	---	-----	------



## Appendix C. Radiated Spurious Emission

<b>Test Engineer :</b>	Jacky Hung, Mancy Chou, Michael Liu and Rain Lee	<b>Temperature :</b>	20~26°C
		<b>Relative Humidity :</b>	40~65%



Band 1 - 5150~5250MHz

WIFI 802.11a (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.	
Ant.					Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.		
3+4		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )	
802.11a CH 36 5180MHz		5146.38	57.63	-16.37	74	45.26	33.2	6.61	27.44	100	274	P	H	
		5150	49.14	-4.86	54	36.76	33.2	6.62	27.44	100	274	A	H	
	*	5180	106.73	-	-	94.3	33.2	6.67	27.44	100	274	P	H	
	*	5180	99.76	-	-	87.33	33.2	6.67	27.44	100	274	A	H	
													H	
														H
			5148.46	56.14	-17.86	74	43.76	33.2	6.62	27.44	300	172	P	V
			5147.94	47.21	-6.79	54	34.83	33.2	6.62	27.44	300	172	A	V
	*		5180	105.22	-	-	92.79	33.2	6.67	27.44	300	172	P	V
	*		5180	98.24	-	-	85.81	33.2	6.67	27.44	300	172	A	V
														V
														V
802.11a CH 44 5220MHz		5134.94	53.96	-20.04	74	41.61	33.2	6.59	27.44	100	277	P	H	
		5052.26	45	-9	54	32.62	33.39	6.44	27.45	100	277	A	H	
	*	5220	104.62	-	-	92.17	33.16	6.72	27.43	100	277	P	H	
	*	5220	99.23	-	-	86.78	33.16	6.72	27.43	100	277	A	H	
			5377.68	52.34	-21.66	74	39.82	33.1	6.83	27.41	100	277	P	H
			5457.48	43.37	-10.63	54	30.85	33.1	6.83	27.41	100	277	A	H
			5067.6	54.3	-19.7	74	41.95	33.33	6.47	27.45	300	175	P	V
			5045.76	44.86	-9.14	54	32.49	33.39	6.43	27.45	300	175	A	V
	*		5220	103.31	-	-	90.86	33.16	6.72	27.43	300	175	P	V
	*		5220	97.87	-	-	85.42	33.16	6.72	27.43	300	175	A	V
			5444.88	52.98	-21.02	74	40.46	33.1	6.83	27.41	300	175	P	V
			5452.44	43.28	-10.72	54	30.76	33.1	6.83	27.41	300	175	A	V



<b>802.11a CH 48 5240MHz</b>		5052.78	54.18	-19.82	74	41.79	33.39	6.45	27.45	100	280	P	H
		5077.22	44.88	-9.12	54	32.55	33.29	6.49	27.45	100	280	A	H
	*	5240	104.42	-	-	91.99	33.12	6.74	27.43	100	280	P	H
	*	5240	99	-	-	86.57	33.12	6.74	27.43	100	280	A	H
		5406.24	52.63	-21.37	74	40.09	33.1	6.85	27.41	100	280	P	H
		5452.16	43.24	-10.76	54	30.72	33.1	6.83	27.41	100	280	A	H
		5057.72	54.54	-19.46	74	42.17	33.37	6.45	27.45	300	174	P	V
		5055.9	44.76	-9.24	54	32.38	33.38	6.45	27.45	300	174	A	V
	*	5240	103.44	-	-	91.01	33.12	6.74	27.43	300	174	P	V
	*	5240	97.65	-	-	85.22	33.12	6.74	27.43	300	174	A	V
		5426.12	52.83	-21.17	74	40.3	33.1	6.84	27.41	300	174	P	V
		5454.68	43.38	-10.62	54	30.86	33.1	6.83	27.41	300	174	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**Band 1 5150~5250MHz**

**WIFI 802.11a (Harmonic @ 3m)**

WIFI Ant. 3+4	Note	Frequency ( MHz )	Level ( dBμV/m )	Margin ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)	
<b>802.11a CH 36 5180MHz</b>		10360	52.24	-15.96	68.2	59.04	39.06	10.71	56.57	100	59	P	H	
		15540	54.25	-19.75	74	59.97	38.24	12.57	56.53	105	308	P	H	
		15540	40.63	-13.37	54	46.35	38.24	12.57	56.53	105	308	A	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
			10360	54.43	-13.77	68.2	61.23	39.06	10.71	56.57	107	247	P	V
			15540	58.52	-15.48	74	64.24	38.24	12.57	56.53	100	108	P	V
			15540	44.3	-9.7	54	50.02	38.24	12.57	56.53	100	108	A	V
														V
														V
														V
													V	
													V	
													V	
													V	





WIFI Ant. 3+4	Note	Frequency ( MHz )	Level ( dBμV/m )	Margin ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)	
802.11a CH 44 5220MHz		10440	49.86	-18.34	68.2	56.47	39.1	10.76	56.47	100	53	P	H	
		15660	55.13	-18.87	74	61.03	37.88	12.59	56.37	100	284	P	H	
		15660	41.47	-12.53	54	47.37	37.88	12.59	56.37	100	284	A	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
			10440	51.36	-16.84	68.2	57.97	39.1	10.76	56.47	100	108	P	V
			15660	59.17	-14.83	74	65.07	37.88	12.59	56.37	110	221	P	V
			15660	45.93	-8.07	54	51.83	37.88	12.59	56.37	110	221	A	V
														V
														V
														V
														V
													V	
													V	
													V	



WiFi Ant. 3+4	Note	Frequency ( MHz )	Level ( dBμV/m )	Margin ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)	
802.11a CH 48 5240MHz		10480	48.61	-19.59	68.2	55.14	39.1	10.79	56.42	100	57	P	H	
		15720	56.05	-17.95	74	61.94	37.8	12.6	56.29	109	282	P	H	
		15720	41.69	-12.31	54	47.58	37.8	12.6	56.29	109	282	A	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
			10480	52.25	-15.95	68.2	58.78	39.1	10.79	56.42	106	108	P	V
			15720	59.49	-14.51	74	65.38	37.8	12.6	56.29	139	222	P	V
		15720	46.43	-7.57	54	52.32	37.8	12.6	56.29	139	222	A	V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.													



**Band 1 5150~5250MHz**

**WIFI 802.11be EHT20 (Band Edge @ 3m)**

WIFI Ant. 3+4	Note	Frequency ( MHz )	Level ( dBμV/m )	Margin ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)	
802.11be EHT20 CH 36 5180MHz		5147.68	60.71	-13.29	74	48.33	33.2	6.62	27.44	100	269	P	H	
		5150	51.2	-2.8	54	38.82	33.2	6.62	27.44	100	269	A	H	
	*	5180	106.85	-	-	94.42	33.2	6.67	27.44	100	269	P	H	
	*	5180	97.33	-	-	84.9	33.2	6.67	27.44	100	269	A	H	
													H	
														H
			5148.72	60.86	-13.14	74	48.48	33.2	6.62	27.44	107	269	P	V
			5148.98	51.26	-2.74	54	38.88	33.2	6.62	27.44	107	269	A	V
		*	5180	105.54	-	-	93.11	33.2	6.67	27.44	107	269	P	V
		*	5180	97.65	-	-	85.22	33.2	6.67	27.44	107	269	A	V
													V	
													V	
802.11be EHT20 CH 44 5220MHz		5064.48	54.33	-19.67	74	41.97	33.34	6.47	27.45	100	271	P	H	
		5091.78	45.63	-8.37	54	33.33	33.23	6.52	27.45	100	271	A	H	
	*	5220	107.59	-	-	95.14	33.16	6.72	27.43	100	271	P	H	
	*	5220	97.41	-	-	84.96	33.16	6.72	27.43	100	271	A	H	
			5423.04	53.33	-20.67	74	40.8	33.1	6.84	27.41	100	271	P	H
			5458.6	44.3	-9.7	54	31.77	33.1	6.83	27.4	100	271	A	H
			5063.7	53.75	-20.25	74	41.39	33.35	6.46	27.45	100	268	P	V
			5053.82	45.71	-8.29	54	33.33	33.38	6.45	27.45	100	268	A	V
		*	5220	104.65	-	-	92.2	33.16	6.72	27.43	100	268	P	V
		*	5220	96.69	-	-	84.24	33.16	6.72	27.43	100	268	A	V
		5402.88	53.55	-20.45	74	41.01	33.1	6.85	27.41	100	268	P	V	
		5457.48	44.21	-9.79	54	31.69	33.1	6.83	27.41	100	268	A	V	



<b>802.11be</b>  <b>EHT20</b>  <b>CH 48</b>  <b>5240MHz</b>		5029.12	54.31	-19.69	74	42.01	33.36	6.4	27.46	100	296	P	H
		5047.84	45.6	-8.4	54	33.21	33.4	6.44	27.45	100	296	A	H
	*	5240	105.31	-	-	92.88	33.12	6.74	27.43	100	296	P	H
	*	5240	97.05	-	-	84.62	33.12	6.74	27.43	100	296	A	H
		5449.92	52.14	-21.86	74	39.62	33.1	6.83	27.41	100	296	P	H
		5455.52	44.48	-9.52	54	31.96	33.1	6.83	27.41	100	296	A	H
		5045.24	54.4	-19.6	74	42.03	33.39	6.43	27.45	103	270	P	V
		5040.56	45.77	-8.23	54	33.43	33.38	6.42	27.46	103	270	A	V
	*	5240	106.03	-	-	93.6	33.12	6.74	27.43	103	270	P	V
	*	5240	97.33	-	-	84.9	33.12	6.74	27.43	103	270	A	V
		5445.72	52.55	-21.45	74	40.03	33.1	6.83	27.41	103	270	P	V
		5457.48	44.1	-9.9	54	31.58	33.1	6.83	27.41	103	270	A	V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**Band 1 5150~5250MHz**

**WIFI 802.11be EHT20 (Harmonic @ 3m)**

WIFI Ant. 3+4	Note	Frequency ( MHz )	Level ( dBμV/m )	Margin ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)	
802.11be EHT20 CH 36 5180MHz		10360	47.68	-20.52	68.2	54.48	39.06	10.71	56.57	-	-	P	H	
		15540	50.53	-23.47	74	56.25	38.24	12.57	56.53	100	285	P	H	
		15540	39.3	-14.7	54	45.02	38.24	12.57	56.53	100	285	A	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
			10360	53.79	-14.41	68.2	60.59	39.06	10.71	56.57	102	242	P	V
			15540	55.05	-18.95	74	60.77	38.24	12.57	56.53	110	241	P	V
			15540	43.31	-10.69	54	49.03	38.24	12.57	56.53	110	241	A	V
														V
														V
														V
														V
													V	
													V	



WIFI Ant. 3+4	Note	Frequency ( MHz )	Level ( dBµV/m )	Margin ( dB )	Limit Line ( dBµV/m )	Read Level (dBµV)	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)	
802.11be EHT20 CH 44 5220MHz		10440	47.66	-20.54	68.2	54.27	39.1	10.76	56.47	-	-	P	H	
		15660	51.16	-22.84	74	57.06	37.88	12.59	56.37	100	284	P	H	
		15660	40.25	-13.75	54	46.15	37.88	12.59	56.37	100	284	A	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
			10440	46.44	-21.76	68.2	53.05	39.1	10.76	56.47	-	-	P	V
			15660	56.49	-17.51	74	62.39	37.88	12.59	56.37	105	221	P	V
			15660	44.14	-9.86	54	50.04	37.88	12.59	56.37	105	221	A	V
														V
														V
														V
														V
													V	
													V	



WiFi Ant. 3+4	Note	Frequency ( MHz )	Level ( dBμV/m )	Margin ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )	
802.11be EHT20 CH 48 5240MHz		10480	45.45	-22.75	68.2	51.98	39.1	10.79	56.42	-	-	P	H	
		15720	52.03	-21.97	74	57.92	37.8	12.6	56.29	100	280	P	H	
		15720	40.3	-13.7	54	46.19	37.8	12.6	56.29	100	280	A	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
			10480	47.24	-20.96	68.2	53.77	39.1	10.79	56.42	-	-	P	V
			15720	57.65	-16.35	74	63.54	37.8	12.6	56.29	100	222	P	V
			15720	44.41	-9.59	54	50.3	37.8	12.6	56.29	100	222	A	V
														V
														V
														V
														V
														V
													V	
													V	
<b>Remark</b>	<ol style="list-style-type: none"> <li>No other spurious found.</li> <li>All results are PASS against Peak and Average limit line.</li> <li>The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.</li> </ol>													



Band 1 5150~5250MHz

WIFI 802.11be EHT40 (Band Edge @ 3m)

WIFI Ant. 3+4	Note	Frequency ( MHz )	Level ( dBμV/m )	Margin ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)
802.11be EHT40 CH 38 5190MHz		5149.5	66.89	-7.11	74	54.51	33.2	6.62	27.44	181	34	P	H
		5149.5	50.39	-3.61	54	38.01	33.2	6.62	27.44	181	34	A	H
	*	5190	99.51	-	-	87.06	33.2	6.69	27.44	181	34	P	H
	*	5190	92.06	-	-	79.61	33.2	6.69	27.44	181	34	A	H
		5392.24	52.88	-21.12	74	40.35	33.1	6.84	27.41	181	34	P	H
		5458.04	43.28	-10.72	54	30.76	33.1	6.83	27.41	181	34	A	H
		5149.76	65.23	-8.77	74	52.85	33.2	6.62	27.44	321	0	P	V
		5148.72	50.1	-3.9	54	37.72	33.2	6.62	27.44	321	0	A	V
	*	5190	97.91	-	-	85.46	33.2	6.69	27.44	321	0	P	V
	*	5190	89.91	-	-	77.46	33.2	6.69	27.44	321	0	A	V
		5421.36	52.51	-21.49	74	39.98	33.1	6.84	27.41	321	0	P	V
		5455.24	43.26	-10.74	54	30.74	33.1	6.83	27.41	321	0	A	V
802.11be EHT40 CH 46 5230MHz		5148.72	57.11	-16.89	74	44.73	33.2	6.62	27.44	132	30	P	H
		5148.46	45.84	-8.16	54	33.46	33.2	6.62	27.44	132	30	A	H
	*	5230	102.83	-	-	90.39	33.14	6.73	27.43	132	30	P	H
	*	5230	95.25	-	-	82.81	33.14	6.73	27.43	132	30	A	H
		5407.08	52.82	-21.18	74	40.28	33.1	6.85	27.41	132	30	P	H
		5454.12	43.24	-10.76	54	30.72	33.1	6.83	27.41	132	30	A	H
		5149.76	54.86	-19.14	74	42.48	33.2	6.62	27.44	100	16	P	V
		5150	45.45	-8.55	54	33.07	33.2	6.62	27.44	100	16	A	V
	*	5230	101.97	-	-	89.53	33.14	6.73	27.43	100	16	P	V
	*	5230	94.83	-	-	82.39	33.14	6.73	27.43	100	16	A	V
	5366.2	53.82	-20.18	74	41.31	33.1	6.83	27.42	100	16	P	V	
	5452.72	43.29	-10.71	54	30.77	33.1	6.83	27.41	100	16	A	V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												





**Band 1 5150~5250MHz**

**WIFI 802.11be EHT40 (Harmonic @ 3m)**

WIFI Ant. 3+4	Note	Frequency ( MHz )	Level ( dBμV/m )	Margin ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)	
802.11be EHT40 CH 38 5190MHz		10380	46.34	-21.86	68.2	53.08	39.08	10.72	56.54	-	-	P	H	
		15570	43.99	-30.01	74	49.79	38.12	12.57	56.49	-	-	P	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
			10380	47.77	-20.43	68.2	54.51	39.08	10.72	56.54	-	-	P	V
			15570	44.48	-29.52	74	50.28	38.12	12.57	56.49	-	-	P	V
														V
														V
														V
														V
													V	
													V	
													V	
													V	



WIFI Ant. 3+4	Note	Frequency ( MHz )	Level ( dBµV/m )	Margin ( dB )	Limit Line ( dBµV/m )	Read Level (dBµV)	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)	
802.11be EHT40 CH 46 5230MHz		10460	45.15	-23.05	68.2	51.73	39.1	10.77	56.45	-	-	P	H	
		15690	51.01	-22.99	74	56.92	37.82	12.6	56.33	102	283	P	H	
		15690	38.96	-15.04	54	44.87	37.82	12.6	56.33	102	283	A	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
			10460	45.96	-22.24	68.2	52.54	39.1	10.77	56.45	-	-	P	V
			15690	55.13	-18.87	74	61.04	37.82	12.6	56.33	109	221	P	V
			15690	42.35	-11.65	54	48.26	37.82	12.6	56.33	109	221	A	V
														V
														V
														V
														V
														V
														V
													V	
<b>Remark</b>	<ol style="list-style-type: none"> <li>No other spurious found.</li> <li>All results are PASS against Peak and Average limit line.</li> <li>The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.</li> </ol>													



**Band 1 5150~5250MHz**

**WIFI 802.11be EHT80 Full (Band Edge @ 3m)**

WIFI Ant. 3+4	Note	Frequency ( MHz )	Level ( dBμV/m )	Margin ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)
<b>802.11be EHT80 Full CH 42 5210MHz</b>		5148.46	64.74	-9.26	74	52.36	33.2	6.62	27.44	145	30	P	H
		5148.46	50.89	-3.11	54	38.51	33.2	6.62	27.44	145	30	A	H
	*	5210	97.49	-	-	85.02	33.18	6.72	27.43	145	30	P	H
	*	5210	89.26	-	-	76.79	33.18	6.72	27.43	145	30	A	H
		5449.36	52.39	-21.61	74	39.87	33.1	6.83	27.41	145	30	P	H
		5457.76	43.62	-10.38	54	31.1	33.1	6.83	27.41	145	30	A	H
		5147.16	65.27	-8.73	74	52.9	33.2	6.61	27.44	103	17	P	V
		5147.42	51.19	-2.81	54	38.81	33.2	6.62	27.44	103	17	A	V
	*	5210	96.16	-	-	83.69	33.18	6.72	27.43	103	17	P	V
	*	5210	89.22	-	-	76.75	33.18	6.72	27.43	103	17	A	V
		5456.64	52.17	-21.83	74	39.65	33.1	6.83	27.41	103	17	P	V
		5443.48	43.67	-10.33	54	31.15	33.1	6.83	27.41	103	17	A	V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												





**Band 1 5150~5250MHz**

**WIFI 802.11be EHT160 Full (Band Edge @ 3m)**

WIFI Ant. 3+4	Note	Frequency ( MHz )	Level ( dBμV/m )	Margin ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)
<b>802.11be EHT160 Full CH 50 5250MHz</b>		5149.6	59.03	-14.97	74	46.65	33.2	6.62	27.44	178	29	P	H
		5148.92	49.38	-4.62	54	37	33.2	6.62	27.44	178	29	A	H
	*	5250	94.38	-	-	81.97	33.1	6.74	27.43	178	29	P	H
	*	5250	84.76	-	-	72.35	33.1	6.74	27.43	178	29	A	H
		5391.12	61.01	-12.99	74	48.48	33.1	6.84	27.41	178	29	P	H
		5385.84	50.96	-3.04	54	38.43	33.1	6.84	27.41	178	29	A	H
		5146.88	62.57	-11.43	74	50.2	33.2	6.61	27.44	100	16	P	V
		5147.22	51.41	-2.59	54	39.04	33.2	6.61	27.44	100	16	A	V
	*	5250	94.64	-	-	82.23	33.1	6.74	27.43	100	16	P	V
	*	5250	85.16	-	-	72.75	33.1	6.74	27.43	100	16	A	V
		5372.64	60.39	-13.61	74	47.88	33.1	6.83	27.42	100	16	P	V
		5388.48	51.82	-2.18	54	39.29	33.1	6.84	27.41	100	16	A	V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz

WIFI 802.11be EHT160 Full (Harmonic @ 3m)

WIFI Ant. 3+4	Note	Frequency ( MHz )	Level ( dBμV/m )	Margin ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)
802.11be EHT160 Full CH 50 5250MHz		10500	47	-21.2	68.2	53.5	39.1	10.8	56.4	-	-	P	H
		15750	44.99	-29.01	74	50.84	37.8	12.6	56.25	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
			10500	47.36	-20.84	68.2	53.86	39.1	10.8	56.4	-	-	P
		15750	44.47	-29.53	74	50.32	37.8	12.6	56.25	-	-	P	V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
<b>Remark</b>	<ol style="list-style-type: none"> <li>No other spurious found.</li> <li>All results are PASS against Peak and Average limit line.</li> <li>The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.</li> </ol>												



Band 2 - 5250~5350MHz

WIFI 802.11a (Band Edge @ 3m)

WIFI Ant. 3+4	Note	Frequency ( MHz )	Level ( dBμV/m )	Margin ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 52 5260MHz		5110.84	53.52	-20.48	74	41.22	33.2	6.55	27.45	108	271	P	H
		5052.02	44.87	-9.13	54	32.49	33.39	6.44	27.45	108	271	A	H
	*	5260	104.92	-	-	92.5	33.1	6.75	27.43	108	271	P	H
	*	5260	98.32	-	-	85.9	33.1	6.75	27.43	108	271	A	H
		5420.88	52.15	-21.85	74	39.62	33.1	6.84	27.41	108	271	P	H
		5456.88	43.33	-10.67	54	30.81	33.1	6.83	27.41	108	271	A	H
		5052.36	53.99	-20.01	74	41.61	33.39	6.44	27.45	295	186	P	V
		5048.96	44.75	-9.25	54	32.36	33.4	6.44	27.45	295	186	A	V
	*	5260	105.54	-	-	93.12	33.1	6.75	27.43	295	186	P	V
	*	5260	97.78	-	-	85.36	33.1	6.75	27.43	295	186	A	V
		5414.4	52.69	-21.31	74	40.16	33.1	6.84	27.41	295	186	P	V
		5450.64	43.19	-10.81	54	30.67	33.1	6.83	27.41	295	186	A	V
802.11a CH 60 5300MHz		5092.82	54.58	-19.42	74	42.28	33.23	6.52	27.45	100	268	P	H
		5046.58	44.68	-9.32	54	32.31	33.39	6.43	27.45	100	268	A	H
	*	5300	106.6	-	-	94.14	33.1	6.78	27.42	100	268	P	H
	*	5300	98.55	-	-	86.09	33.1	6.78	27.42	100	268	A	H
		5431.2	51.89	-22.11	74	39.36	33.1	6.84	27.41	100	268	P	H
		5454.48	43.61	-10.39	54	31.09	33.1	6.83	27.41	100	268	A	H
		5026.86	53.73	-20.27	74	41.44	33.35	6.4	27.46	311	179	P	V
		5046.58	44.73	-9.27	54	32.36	33.39	6.43	27.45	311	179	A	V
	*	5300	105.17	-	-	92.71	33.1	6.78	27.42	311	179	P	V
	*	5300	98.09	-	-	85.63	33.1	6.78	27.42	311	179	A	V
		5422.8	52.55	-21.45	74	40.02	33.1	6.84	27.41	311	179	P	V
		5459.52	43.35	-10.65	54	30.82	33.1	6.83	27.4	311	179	A	V



<b>802.11a</b>  <b>CH 64</b>  <b>5320MHz</b>	*	5320	105.7	-	-	93.23	33.1	6.79	27.42	103	270	P	H
	*	5320	98.01	-	-	85.54	33.1	6.79	27.42	103	270	A	H
		5351.68	59.69	-14.31	74	47.19	33.1	6.82	27.42	103	270	P	H
		5351.04	48.68	-5.32	54	36.18	33.1	6.82	27.42	103	270	A	H
													H
													H
	*	5320	105.4	-	-	92.93	33.1	6.79	27.42	306	179	P	V
	*	5320	97.53	-	-	85.06	33.1	6.79	27.42	306	179	A	V
		5351.68	61.52	-12.48	74	49.02	33.1	6.82	27.42	306	179	P	V
		5350.88	49.42	-4.58	54	36.92	33.1	6.82	27.42	306	179	A	V
													V
													V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												





Band 2 5250~5350MHz

WIFI 802.11a (Harmonic @ 3m)

WIFI Ant. 3+4	Note	Frequency ( MHz )	Level ( dBμV/m )	Margin ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)	
802.11a CH 52 5260MHz		10520	49.07	-19.13	68.2	55.51	39.14	10.82	56.4	100	56	P	H	
		15780	55.69	-18.31	74	61.49	37.8	12.61	56.21	100	282	P	H	
		15780	40.77	-13.23	54	46.57	37.8	12.61	56.21	100	282	A	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
			10520	51.35	-16.85	68.2	57.79	39.14	10.82	56.4	100	109	P	V
			15780	60.44	-13.56	74	66.24	37.8	12.61	56.21	118	222	P	V
			15780	45.4	-8.6	54	51.2	37.8	12.61	56.21	118	222	A	V
														V
														V
													V	
													V	
													V	
													V	
													V	
													V	



WIFI Ant. 3+4	Note	Frequency ( MHz )	Level ( dBµV/m )	Margin ( dB )	Limit Line ( dBµV/m )	Read Level (dBµV)	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)	
i802.11a CH 60 5300MHz		10600	44.86	-29.14	74	51.09	39.3	10.87	56.4	-	-	P	H	
		15900	51.83	-22.17	74	57.44	37.8	12.64	56.05	111	302	P	H	
		15900	39.61	-14.39	54	45.22	37.8	12.64	56.05	111	302	A	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
			10600	46.37	-27.63	74	52.6	39.3	10.87	56.4	-	-	P	V
			15900	60.26	-13.74	74	65.87	37.8	12.64	56.05	111	109	P	V
		15900	47.23	-6.77	54	52.84	37.8	12.64	56.05	111	109	A	V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	



WIFI Ant. 3+4	Note	Frequency ( MHz )	Level ( dBμV/m )	Margin ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)	
802.11a CH 64 5320MHz		10640	45.5	-28.5	74	51.66	39.34	10.9	56.4	-	-	P	H	
		15960	52.55	-21.45	74	58.13	37.74	12.65	55.97	100	307	P	H	
		15960	40.45	-13.55	54	46.03	37.74	12.65	55.97	100	307	A	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
			10640	51.55	-22.45	74	57.71	39.34	10.9	56.4	100	137	P	V
			10640	40.94	-13.06	54	47.1	39.34	10.9	56.4	100	137	A	V
		15960	61.53	-12.47	74	67.11	37.74	12.65	55.97	113	108	P	V	
		15960	47.15	-6.85	54	52.73	37.74	12.65	55.97	113	108	A	V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.													



Band 2 5250~5350MHz

WIFI 802.11be EHT20 (Band Edge @ 3m)

WIFI Ant. 3+4	Note	Frequency ( MHz )	Level ( dBμV/m )	Margin ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)
802.11be EHT20 CH 52 5260MHz		5002.72	54.64	-19.36	74	42.44	33.31	6.35	27.46	104	275	P	H
		5060.86	45.85	-8.15	54	33.48	33.36	6.46	27.45	104	275	A	H
	*	5260	105.77	-	-	93.35	33.1	6.75	27.43	104	275	P	H
	*	5260	96.99	-	-	84.57	33.1	6.75	27.43	104	275	A	H
		5396.4	52.52	-21.48	74	39.98	33.1	6.85	27.41	104	275	P	H
		5453.52	44.42	-9.58	54	31.9	33.1	6.83	27.41	104	275	A	H
		5042.5	54.78	-19.22	74	42.41	33.39	6.43	27.45	100	271	P	V
		5039.44	45.94	-8.06	54	33.6	33.38	6.42	27.46	100	271	A	V
	*	5260	105.79	-	-	93.37	33.1	6.75	27.43	100	271	P	V
	*	5260	96.23	-	-	83.81	33.1	6.75	27.43	100	271	A	V
		5377.68	53.13	-20.87	74	40.61	33.1	6.83	27.41	100	271	P	V
		5457.6	44.19	-9.81	54	31.67	33.1	6.83	27.41	100	271	A	V
802.11be EHT20 CH 60 5300MHz		5133.96	54.1	-19.9	74	41.75	33.2	6.59	27.44	100	269	P	H
		5026.86	45.77	-8.23	54	33.48	33.35	6.4	27.46	100	269	A	H
	*	5300	106.66	-	-	94.2	33.1	6.78	27.42	100	269	P	H
	*	5300	97.16	-	-	84.7	33.1	6.78	27.42	100	269	A	H
		5451.84	52.95	-21.05	74	40.43	33.1	6.83	27.41	100	269	P	H
		5456.16	44.57	-9.43	54	32.05	33.1	6.83	27.41	100	269	A	H
		5031.96	54.54	-19.46	74	42.23	33.36	6.41	27.46	128	345	P	V
		5022.44	45.74	-8.26	54	33.47	33.34	6.39	27.46	128	345	A	V
	*	5300	106.07	-	-	93.61	33.1	6.78	27.42	128	345	P	V
	*	5300	97.48	-	-	85.02	33.1	6.78	27.42	128	345	A	V
	5419.44	52.98	-21.02	74	40.45	33.1	6.84	27.41	128	345	P	V	
	5459.76	44.6	-9.4	54	32.07	33.1	6.83	27.4	128	345	A	V	



<b>802.11be</b>  <b>EHT20</b>  <b>CH 64</b>  <b>5320MHz</b>	*	5320	105.08	-	-	92.61	33.1	6.79	27.42	100	274	P	H
	*	5320	95.96	-	-	83.49	33.1	6.79	27.42	100	274	A	H
		5352.64	57.85	-16.15	74	45.35	33.1	6.82	27.42	100	274	P	H
		5350.56	49.8	-4.2	54	37.3	33.1	6.82	27.42	100	274	A	H
													H
													H
	*	5320	107.34	-	-	94.87	33.1	6.79	27.42	100	347	P	V
	*	5320	97.12	-	-	84.65	33.1	6.79	27.42	100	347	A	V
		5350.08	59.05	-14.95	74	46.55	33.1	6.82	27.42	100	347	P	V
		5350.08	50.71	-3.29	54	38.21	33.1	6.82	27.42	100	347	A	V
													V
													V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 2 5250~5350MHz

WIFI 802.11be EHT20 (Harmonic @ 3m)

WIFI Ant. 3+4	Note	Frequency ( MHz )	Level ( dBμV/m )	Margin ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)	
802.11be EHT20 CH 52 5260MHz		10520	46.7	-21.5	68.2	53.14	39.14	10.82	56.4	-	-	P	H	
		15780	52.78	-21.22	74	58.58	37.8	12.61	56.21	100	282	P	H	
		15780	40.09	-13.91	54	45.89	37.8	12.61	56.21	100	282	A	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
			10520	49.93	-18.27	68.2	56.37	39.14	10.82	56.4	100	3	P	V
			15780	57.68	-16.32	74	63.48	37.8	12.61	56.21	111	217	P	V
			15780	44.34	-9.66	54	50.14	37.8	12.61	56.21	111	217	A	V
														V
														V
														V
														V
													V	
													V	



WIFI Ant. 3+4	Note	Frequency ( MHz )	Level ( dBµV/m )	Margin ( dB )	Limit Line ( dBµV/m )	Read Level (dBµV)	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)	
802.11be EHT20 CH 60 5300MHz		10600	45.83	-28.17	74	52.06	39.3	10.87	56.4	-	-	P	H	
		15900	53.79	-20.21	74	59.4	37.8	12.64	56.05	135	13	P	H	
		15900	40.82	-13.18	54	46.43	37.8	12.64	56.05	135	13	A	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
			10600	46.05	-27.95	74	52.28	39.3	10.87	56.4	-	-	P	V
			15900	58.62	-15.38	74	64.23	37.8	12.64	56.05	107	110	P	V
			15900	45.38	-8.62	54	50.99	37.8	12.64	56.05	107	110	A	V
														V
														V
														V
														V
													V	
													V	



WIFI Ant. 3+4	Note	Frequency ( MHz )	Level ( dBμV/m )	Margin ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)	
802.11be EHT20 CH 64 5320MHz		10640	45.39	-28.61	74	51.55	39.34	10.9	56.4	-	-	P	H	
		15960	54.21	-19.79	74	59.79	37.74	12.65	55.97	134	11	P	H	
		15960	41.8	-12.2	54	47.38	37.74	12.65	55.97	134	11	A	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
			10640	46.78	-27.22	74	52.94	39.34	10.9	56.4	-	-	P	V
			15960	58.3	-15.7	74	63.88	37.74	12.65	55.97	108	109	P	V
			15960	45.8	-8.2	54	51.38	37.74	12.65	55.97	108	109	A	V
														V
														V
														V
														V
														V
														V
													V	
<b>Remark</b>	<ol style="list-style-type: none"> <li>No other spurious found.</li> <li>All results are PASS against Peak and Average limit line.</li> <li>The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.</li> </ol>													





Band 2 5250~5350MHz

WIFI 802.11be EHT40 (Band Edge @ 3m)

WIFI Ant. 3+4	Note	Frequency ( MHz )	Level ( dBμV/m )	Margin ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)
802.11be EHT40 CH 54 5270MHz		5105.06	54.81	-19.19	74	42.52	33.2	6.54	27.45	164	39	P	H
		5075.82	45.04	-8.96	54	32.7	33.3	6.49	27.45	164	39	A	H
	*	5270	102.8	-	-	90.37	33.1	6.76	27.43	164	39	P	H
	*	5270	93.85	-	-	81.42	33.1	6.76	27.43	164	39	A	H
		5355.6	52.57	-21.43	74	40.07	33.1	6.82	27.42	164	39	P	H
		5350.8	43.6	-10.4	54	31.1	33.1	6.82	27.42	164	39	A	H
		5069.36	54.98	-19.02	74	42.64	33.32	6.47	27.45	100	134	P	V
		5055.42	44.72	-9.28	54	32.34	33.38	6.45	27.45	100	134	A	V
	*	5270	101.76	-	-	89.33	33.1	6.76	27.43	100	134	P	V
	*	5270	92.36	-	-	79.93	33.1	6.76	27.43	100	134	A	V
		5352.24	54.1	-19.9	74	41.6	33.1	6.82	27.42	100	134	P	V
		5350.8	44.22	-9.78	54	31.72	33.1	6.82	27.42	100	134	A	V
802.11be EHT40 CH 62 5310MHz		5036.38	54.66	-19.34	74	42.33	33.37	6.42	27.46	400	268	P	H
		5055.76	44.72	-9.28	54	32.34	33.38	6.45	27.45	400	268	A	H
	*	5310	97.04	-	-	84.57	33.1	6.79	27.42	400	268	P	H
	*	5310	88.09	-	-	75.62	33.1	6.79	27.42	400	268	A	H
		5351.04	67.87	-6.13	74	55.37	33.1	6.82	27.42	400	268	P	H
		5350.08	52.01	-1.99	54	39.51	33.1	6.82	27.42	400	268	A	H
		5064.26	54.68	-19.32	74	42.32	33.34	6.47	27.45	100	346	P	V
		5053.72	44.82	-9.18	54	32.43	33.39	6.45	27.45	100	346	A	V
	*	5310	100.31	-	-	87.84	33.1	6.79	27.42	100	346	P	V
	*	5310	90.89	-	-	78.42	33.1	6.79	27.42	100	346	A	V
	5350.56	66.46	-7.54	74	53.96	33.1	6.82	27.42	100	346	P	V	
	5352.48	52.03	-1.97	54	39.53	33.1	6.82	27.42	100	346	A	V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**Band 2 5250~5350MHz**

**WIFI 802.11be EHT40 (Harmonic @ 3m)**

WIFI Ant. 3+4	Note	Frequency ( MHz )	Level ( dBμV/m )	Margin ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)	
802.11be EHT40 CH 54 5270MHz		10540	45.92	-22.28	68.2	52.3	39.18	10.84	56.4	-	-	P	H	
		15810	45.97	-28.03	74	51.72	37.8	12.62	56.17	-	-	P	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
			10540	47.38	-20.82	68.2	53.76	39.18	10.84	56.4	-	-	P	V
			15810	55.16	-18.84	74	60.91	37.8	12.62	56.17	100	218	P	V
			15810	41.35	-12.65	54	47.1	37.8	12.62	56.17	100	218	A	V
														V
														V
														V
													V	
													V	
													V	
													V	



WIFI Ant. 3+4	Note	Frequency ( MHz )	Level ( dBµV/m )	Margin ( dB )	Limit Line ( dBµV/m )	Read Level (dBµV)	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)
802.11be EHT40 CH 62 5310MHz		10620	46.45	-27.55	74	52.64	39.32	10.89	56.4	-	-	P	H
		15930	44.1	-29.9	74	49.7	37.77	12.64	56.01	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
			10620	45.81	-28.19	74	52	39.32	10.89	56.4	-	-	P
		15930	44.92	-29.08	74	50.52	37.77	12.64	56.01	-	-	P	V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
<b>Remark</b>	<ol style="list-style-type: none"> <li>No other spurious found.</li> <li>All results are PASS against Peak and Average limit line.</li> <li>The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.</li> </ol>												



**Band 2 5250~5350MHz**

**WIFI 802.11be EHT80 Full (Band Edge @ 3m)**

WIFI Ant. 3+4	Note	Frequency ( MHz )	Level ( dBμV/m )	Margin ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)
<b>802.11be EHT80 Full CH 58 5290MHz</b>		5021.08	53.65	-20.35	74	41.38	33.34	6.39	27.46	100	233	P	H
		5043.52	45.07	-8.93	54	32.7	33.39	6.43	27.45	100	233	A	H
	*	5290	97.94	-	-	85.5	33.1	6.77	27.43	100	233	P	H
	*	5290	88.26	-	-	75.82	33.1	6.77	27.43	100	233	A	H
		5358.48	59.91	-14.09	74	47.41	33.1	6.82	27.42	100	233	P	H
		5350.32	51.78	-2.22	54	39.28	33.1	6.82	27.42	100	233	A	H
		5138.72	54.33	-19.67	74	41.97	33.2	6.6	27.44	100	17	P	V
		5053.38	44.99	-9.01	54	32.6	33.39	6.45	27.45	100	17	A	V
	*	5290	99.48	-	-	87.04	33.1	6.77	27.43	100	17	P	V
	*	5290	89.34	-	-	76.9	33.1	6.77	27.43	100	17	A	V
		5354.16	63.36	-10.64	74	50.86	33.1	6.82	27.42	100	17	P	V
	5350.56	51.81	-2.19	54	39.31	33.1	6.82	27.42	100	17	A	V	
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 2 5250~5350MHz

WIFI 802.11be EHT80 Full (Harmonic @ 3m)

WIFI Ant. 3+4	Note	Frequency ( MHz )	Level ( dBμV/m )	Margin ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)	
802.11be EHT80 Full CH 58 5290MHz		10580	45.44	-22.76	68.2	51.72	39.26	10.86	56.4	-	-	P	H	
		15870	43.81	-30.19	74	49.47	37.8	12.63	56.09	-	-	P	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
	Remark	1. No other spurious found.												
		2. All results are PASS against Peak and Average limit line.												
3. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.														



Band 3 - 5470~5725MHz

WIFI 802.11a (Band Edge @ 3m)

WIFI Ant. 3+4	Note	Frequency ( MHz )	Level ( dBμV/m )	Margin ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)	
802.11a CH 100 5500MHz		5432.08	52.97	-21.03	74	40.44	33.1	6.84	27.41	100	295	P	H	
		5467.76	63.48	-4.72	68.2	50.96	33.1	6.82	27.4	100	295	P	H	
		5458.32	44.7	-9.3	54	32.18	33.1	6.83	27.41	100	295	A	H	
	*	5500	108.45	-	-	95.94	33.1	6.81	27.4	100	295	P	H	
	*	5500	101.83	-	-	89.32	33.1	6.81	27.4	100	295	A	H	
														H
			5455.76	53.31	-20.69	74	40.79	33.1	6.83	27.41	208	208	P	V
			5469.04	59.34	-8.86	68.2	46.82	33.1	6.82	27.4	208	208	P	V
			5458.8	44.38	-9.62	54	31.85	33.1	6.83	27.4	208	208	A	V
	*		5500	107.22	-	-	94.71	33.1	6.81	27.4	208	208	P	V
	*		5500	99.64	-	-	87.13	33.1	6.81	27.4	208	208	A	V
														V
802.11a CH 116 5580MHz		5440.96	52.24	-21.76	74	39.72	33.1	6.83	27.41	101	299	P	H	
		5466.88	52.44	-15.76	68.2	39.92	33.1	6.82	27.4	101	299	P	H	
		5459.92	43.37	-10.63	54	30.84	33.1	6.83	27.4	101	299	A	H	
	*	5580	108.82	-	-	96.36	33.1	6.78	27.42	101	299	P	H	
	*	5580	102.02	-	-	89.56	33.1	6.78	27.42	101	299	A	H	
			5758.07	53.25	-14.95	68.2	39.88	33.95	6.89	27.47	101	299	P	H
			5433.28	52.83	-21.17	74	40.3	33.1	6.84	27.41	199	205	P	V
			5467.12	51.48	-16.72	68.2	38.96	33.1	6.82	27.4	199	205	P	V
			5459.92	43.36	-10.64	54	30.83	33.1	6.83	27.4	199	205	A	V
	*		5580	106.2	-	-	93.74	33.1	6.78	27.42	199	205	P	V
	*		5580	99.56	-	-	87.1	33.1	6.78	27.42	199	205	A	V
			5754.29	54.17	-14.03	68.2	40.82	33.93	6.89	27.47	199	205	P	V



<b>802.11a</b> <b>CH 140</b> <b>5700MHz</b>	*	5700	106.43	-	-	93.43	33.6	6.85	27.45	287	16	P	H
	*	5700	99.6	-	-	86.6	33.6	6.85	27.45	287	16	A	H
		5733.16	60.86	-7.34	68.2	47.65	33.8	6.87	27.46	287	16	P	H
													H
													H
													H
	*	5700	105.83	-	-	92.83	33.6	6.85	27.45	235	16	P	V
	*	5700	98.83	-	-	85.83	33.6	6.85	27.45	235	16	A	V
		5726.84	61.05	-7.15	68.2	47.88	33.76	6.87	27.46	235	16	P	V
													V
													V
													V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**Band 3 - 5470~5725MHz**

**WIFI 802.11a (Harmonic @ 3m)**

WIFI Ant. 3+4	Note	Frequency ( MHz )	Level ( dBμV/m )	Margin ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 100 5500MHz		11000	45.14	-28.86	74	51.52	38.9	11.13	56.41	-	-	P	H
		16500	53.41	-14.79	68.2	57.46	38.4	13.16	55.61	100	86	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
			11000	45.07	-28.93	74	51.45	38.9	11.13	56.41	-	-	P
		16500	59.89	-8.31	68.2	63.94	38.4	13.16	55.61	112	104	P	V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V





WIFI Ant. 3+4	Note	Frequency ( MHz )	Level ( dBµV/m )	Margin ( dB )	Limit Line ( dBµV/m )	Read Level (dBµV)	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)	
802.11a CH 116 5580MHz		11160	44.76	-29.24	74	51.05	38.9	11.11	56.3	-	-	P	H	
		16740	53.15	-15.05	68.2	57.5	38.1	13.41	55.86	100	300	P	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
			11160	46.83	-27.17	74	53.12	38.9	11.11	56.3	-	-	P	V
			16740	57.84	-10.36	68.2	62.19	38.1	13.41	55.86	108	100	P	V
														V
														V
														V
														V
													V	
													V	
													V	
													V	
													V	



WIFI Ant. 3+4	Note	Frequency ( MHz )	Level ( dBµV/m )	Margin ( dB )	Limit Line ( dBµV/m )	Read Level (dBµV)	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 140 5700MHz		11400	45.87	-28.13	74	51.71	39.1	11.07	56.01	-	-	P	H
		17100	57.91	-10.29	68.2	62.14	38.1	13.74	56.07	251	286	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
			11400	45.88	-28.12	74	51.72	39.1	11.07	56.01	-	-	P
		17100	61.21	-6.99	68.2	65.44	38.1	13.74	56.07	351	359	P	V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
<b>Remark</b>	<ol style="list-style-type: none"> <li>No other spurious found.</li> <li>All results are PASS against Peak and Average limit line.</li> <li>The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.</li> </ol>												



Band 3 - 5470~5725MHz

WIFI 802.11be EHT20 (Band Edge @ 3m)

WIFI Ant. 3+4	Note	Frequency ( MHz )	Level ( dBμV/m )	Margin ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)	
802.11be EHT20 CH 100 5500MHz		5459.12	56.02	-17.98	74	43.49	33.1	6.83	27.4	100	236	P	H	
		5470	63.18	-5.02	68.2	50.66	33.1	6.82	27.4	100	236	P	H	
		5459.92	46.21	-7.79	54	33.68	33.1	6.83	27.4	100	236	A	H	
	*	5500	106.45	-	-	93.94	33.1	6.81	27.4	100	236	P	H	
	*	5500	99.06	-	-	86.55	33.1	6.81	27.4	100	236	A	H	
														H
			5459.92	56.61	-17.39	74	44.08	33.1	6.83	27.4	100	136	P	V
			5470	64.68	-3.52	68.2	52.16	33.1	6.82	27.4	100	136	P	V
			5458.96	46.04	-7.96	54	33.51	33.1	6.83	27.4	100	136	A	V
	*		5500	106.94	-	-	94.43	33.1	6.81	27.4	100	136	P	V
	*		5500	98.74	-	-	86.23	33.1	6.81	27.4	100	136	A	V
													V	
802.11be EHT20 CH 116 5580MHz		5440.24	53.03	-20.97	74	40.51	33.1	6.83	27.41	100	236	P	H	
		5460.64	52.28	-15.92	68.2	39.75	33.1	6.83	27.4	100	236	P	H	
		5456.8	44.67	-9.33	54	32.15	33.1	6.83	27.41	100	236	A	H	
	*	5580	107.73	-	-	95.27	33.1	6.78	27.42	100	236	P	H	
	*	5580	99.22	-	-	86.76	33.1	6.78	27.42	100	236	A	H	
			5749.88	53.5	-14.7	68.2	40.18	33.9	6.88	27.46	100	236	P	H
			5426.56	53.17	-20.83	74	40.64	33.1	6.84	27.41	100	135	P	V
			5465.68	52.48	-15.72	68.2	39.96	33.1	6.82	27.4	100	135	P	V
			5448.64	44.32	-9.68	54	31.8	33.1	6.83	27.41	100	135	A	V
	*		5580	107.63	-	-	95.17	33.1	6.78	27.42	100	135	P	V
	*		5580	98.83	-	-	86.37	33.1	6.78	27.42	100	135	A	V
		5752.715	54.5	-13.7	68.2	41.17	33.92	6.88	27.47	100	135	P	V	



<b>802.11be</b> <b>EHT20</b> <b>CH 140</b> <b>5700MHz</b>	*	5700	104.3	-	-	91.3	33.6	6.85	27.45	293	14	P	H
	*	5700	97.42	-	-	84.42	33.6	6.85	27.45	293	14	A	H
		5725.64	66.11	-2.09	68.2	52.96	33.75	6.86	27.46	293	14	P	H
													H
													H
													H
	*	5700	103.66	-	-	90.66	33.6	6.85	27.45	396	10	P	V
	*	5700	96.7	-	-	83.7	33.6	6.85	27.45	396	10	A	V
		5725.48	65.33	-2.87	68.2	52.18	33.75	6.86	27.46	396	10	P	V
													V
													V
													V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**Band 3 - 5470~5725MHz**

**WIFI 802.11be EHT20 (Harmonic @ 3m)**

WIFI Ant. 3+4	Note	Frequency ( MHz )	Level ( dBμV/m )	Margin ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)	
802.11be EHT20 CH 100 5500MHz		11000	45.19	-28.81	74	51.57	38.9	11.13	56.41	-	-	P	H	
		16500	52.33	-15.87	68.2	56.38	38.4	13.16	55.61	100	79	P	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
			11000	45.98	-28.02	74	52.36	38.9	11.13	56.41	-	-	P	V
			16500	57.79	-10.41	68.2	61.84	38.4	13.16	55.61	113	109	P	V
														V
														V
														V
														V
													V	
													V	
													V	



WIFI Ant. 3+4	Note	Frequency ( MHz )	Level ( dBµV/m )	Margin ( dB )	Limit Line ( dBµV/m )	Read Level (dBµV)	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)
802.11be EHT20 CH 116 5580MHz		11160	44.79	-29.21	74	51.08	38.9	11.11	56.3	-	-	P	H
		16740	53.68	-14.52	68.2	58.03	38.1	13.41	55.86	109	299	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
			11160	45.3	-28.7	74	51.59	38.9	11.11	56.3	-	-	P
		16740	55.83	-12.37	68.2	60.18	38.1	13.41	55.86	100	74	P	V
													V
													V
													V
													V
													V
													V
													V
													V
													V



WIFI Ant. 3+4	Note	Frequency ( MHz )	Level ( dBμV/m )	Margin ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)
802.11be EHT20 CH 140 5700MHz		11400	44.57	-29.43	74	50.41	39.1	11.07	56.01	-	-	P	H
		17100	57.93	-10.27	68.2	62.16	38.1	13.74	56.07	230	284	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
			11400	45.61	-28.39	74	51.45	39.1	11.07	56.01	-	-	P
		17100	60.76	-7.44	68.2	64.99	38.1	13.74	56.07	348	0	P	V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
<b>Remark</b>	<ol style="list-style-type: none"> <li>No other spurious found.</li> <li>All results are PASS against Peak and Average limit line.</li> <li>The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.</li> </ol>												



**Band 3 - 5470~5725MHz**

**WIFI 802.11be EHT40 (Band Edge @ 3m)**

WIFI Ant. 3+4	Note	Frequency ( MHz )	Level ( dBμV/m )	Margin ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11be EHT40 CH 102 5510MHz		5459.68	57.72	-16.28	74	45.19	33.1	6.83	27.4	100	238	P	H
		5469.04	65.3	-2.9	68.2	52.78	33.1	6.82	27.4	100	238	P	H
		5459.2	44.41	-9.59	54	31.88	33.1	6.83	27.4	100	238	A	H
	*	5510	101.66	-	-	89.15	33.1	6.81	27.4	100	238	P	H
	*	5510	92.93	-	-	80.42	33.1	6.81	27.4	100	238	A	H
		5741.375	54.09	-14.11	68.2	40.82	33.85	6.88	27.46	100	238	P	H
		5455.36	57.66	-16.34	74	45.14	33.1	6.83	27.41	100	138	P	V
		5469.28	64.47	-3.73	68.2	51.95	33.1	6.82	27.4	100	138	P	V
		5455.36	44.26	-9.74	54	31.74	33.1	6.83	27.41	100	138	A	V
	*	5510	100.22	-	-	87.71	33.1	6.81	27.4	100	138	P	V
	*	5510	91.35	-	-	78.84	33.1	6.81	27.4	100	138	A	V
	5732.87	54.67	-13.53	68.2	41.46	33.8	6.87	27.46	100	138	P	V	
802.11be EHT40 CH 110 5550MHz		5457.52	54.2	-19.8	74	41.68	33.1	6.83	27.41	100	237	P	H
		5464.24	54.63	-13.57	68.2	42.11	33.1	6.82	27.4	100	237	P	H
		5456.32	44.07	-9.93	54	31.55	33.1	6.83	27.41	100	237	A	H
	*	5550	106.43	-	-	93.95	33.1	6.79	27.41	100	237	P	H
	*	5550	96.31	-	-	83.83	33.1	6.79	27.41	100	237	A	H
		5739.8	54.08	-14.12	68.2	40.83	33.84	6.87	27.46	100	237	P	H
		5396.56	53.88	-20.12	74	41.34	33.1	6.85	27.41	100	138	P	V
		5466.16	54.31	-13.89	68.2	41.79	33.1	6.82	27.4	100	138	P	V
		5457.76	43.87	-10.13	54	31.35	33.1	6.83	27.41	100	138	A	V
	*	5550	104.06	-	-	91.58	33.1	6.79	27.41	100	138	P	V
	*	5550	96.01	-	-	83.53	33.1	6.79	27.41	100	138	A	V
	5746.415	54.74	-13.46	68.2	41.44	33.88	6.88	27.46	100	138	P	V	





<b>802.11be</b>  <b>EHT40</b>  <b>CH 134</b>  <b>5670MHz</b>		5442.05	53.74	-20.26	74	41.22	33.1	6.83	27.41	100	233	P	H
		5466.9	54.64	-13.56	68.2	42.12	33.1	6.82	27.4	100	233	P	H
		5443.1	44.05	-9.95	54	31.53	33.1	6.83	27.41	100	233	A	H
	*	5670	105.45	-	-	92.71	33.36	6.82	27.44	100	233	P	H
	*	5670	96.75	-	-	84.01	33.36	6.82	27.44	100	233	A	H
		5729.72	62.03	-6.17	68.2	48.84	33.78	6.87	27.46	100	233	P	H
		5401.45	53.47	-20.53	74	40.93	33.1	6.85	27.41	100	135	P	V
		5466.9	52.74	-15.46	68.2	40.22	33.1	6.82	27.4	100	135	P	V
		5445.55	44.14	-9.86	54	31.62	33.1	6.83	27.41	100	135	A	V
	*	5670	105.45	-	-	92.71	33.36	6.82	27.44	100	135	P	V
	*	5670	97.2	-	-	84.46	33.36	6.82	27.44	100	135	A	V
		5735.39	64.71	-3.49	68.2	51.49	33.81	6.87	27.46	100	135	P	V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**Band 3 - 5470~5725MHz**

**WIFI 802.11be EHT40 (Harmonic @ 3m)**

WIFI Ant. 3+4	Note	Frequency ( MHz )	Level ( dBμV/m )	Margin ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )	
802.11be EHT40 CH 102 5510MHz		11020	46.04	-27.96	74	52.41	38.9	11.13	56.4	-	-	P	H	
		16530	44.68	-23.52	68.2	48.84	38.28	13.2	55.64	-	-	P	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
			11020	46.26	-27.74	74	52.63	38.9	11.13	56.4	-	-	P	V
			16530	45.47	-22.73	68.2	49.63	38.28	13.2	55.64	-	-	P	V
														V
														V
														V
														V
														V
													V	
													V	



WIFI Ant. 3+4	Note	Frequency ( MHz )	Level ( dBµV/m )	Margin ( dB )	Limit Line ( dBµV/m )	Read Level ( dBµV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)
802.11be EHT40 CH 110 5550MHz		11100	45.73	-28.27	74	52.05	38.9	11.12	56.34	-	-	P	H
		16650	45.49	-22.71	68.2	49.89	38.05	13.32	55.77	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
			11100	45.72	-28.28	74	52.04	38.9	11.12	56.34	-	-	P
		16650	52.43	-15.77	68.2	56.83	38.05	13.32	55.77	114	97	P	V
													V
													V
													V
													V
													V
													V
													V
													V
													V



WIFI Ant. 3+4	Note	Frequency ( MHz )	Level ( dBµV/m )	Margin ( dB )	Limit Line ( dBµV/m )	Read Level ( dBµV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )	
802.11be EHT40 CH 134 5670MHz		11340	45.42	-28.58	74	51.48	39.04	11.08	56.18	-	-	P	H	
		17010	55.18	-13.02	68.2	59.64	38.01	13.69	56.16	100	67	P	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
			11340	45.31	-28.69	74	51.37	39.04	11.08	56.18	-	-	P	V
			17010	58.71	-9.49	68.2	63.17	38.01	13.69	56.16	100	85	P	V
														V
														V
														V
														V
													V	
													V	
													V	
													V	
													V	
<b>Remark</b>	<ol style="list-style-type: none"> <li>No other spurious found.</li> <li>All results are PASS against Peak and Average limit line.</li> <li>The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.</li> </ol>													



Band 3 - 5470~5725MHz

WIFI 802.11be EHT80 Full (Band Edge @ 3m)

WIFI Ant. 3+4	Note	Frequency ( MHz )	Level ( dBμV/m )	Margin ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)
802.11be EHT80 Full CH 106 5530MHz		5458	60.42	-13.58	74	47.9	33.1	6.83	27.41	100	234	P	H
		5469.76	63.64	-4.56	68.2	51.12	33.1	6.82	27.4	100	234	P	H
		5459.68	45.55	-8.45	54	33.02	33.1	6.83	27.4	100	234	A	H
	*	5530	99.86	-	-	87.37	33.1	6.8	27.41	100	234	P	H
	*	5530	90.14	-	-	77.65	33.1	6.8	27.41	100	234	A	H
		5741.375	53.87	-14.33	68.2	40.6	33.85	6.88	27.46	100	234	P	H
		5459.68	59.74	-14.26	74	47.21	33.1	6.83	27.4	100	137	P	V
		5469.76	66.02	-2.18	68.2	53.5	33.1	6.82	27.4	100	137	P	V
		5459.92	46.05	-7.95	54	33.52	33.1	6.83	27.4	100	137	A	V
	*	5530	99.53	-	-	87.04	33.1	6.8	27.41	100	137	P	V
	*	5530	90.15	-	-	77.66	33.1	6.8	27.41	100	137	A	V
	5749.88	53.68	-14.52	68.2	40.36	33.9	6.88	27.46	100	137	P	V	
802.11be EHT80 Full CH 122 5610MHz		5441	53.81	-20.19	74	41.29	33.1	6.83	27.41	102	233	P	H
		5461.54	54.02	-14.18	68.2	41.49	33.1	6.83	27.4	102	233	P	H
		5455.56	44.94	-9.06	54	32.42	33.1	6.83	27.41	102	233	A	H
	*	5610	101.98	-	-	89.51	33.12	6.78	27.43	102	233	P	H
	*	5610	93.51	-	-	81.04	33.12	6.78	27.43	102	233	A	H
		5728.145	58.47	-9.73	68.2	45.29	33.77	6.87	27.46	102	233	P	H
		5459.72	54.9	-19.1	74	42.37	33.1	6.83	27.4	101	136	P	V
		5469.86	53.71	-14.49	68.2	41.19	33.1	6.82	27.4	101	136	P	V
		5455.82	44.68	-9.32	54	32.16	33.1	6.83	27.41	101	136	A	V
	*	5610	101.77	-	-	89.3	33.12	6.78	27.43	101	136	P	V
	*	5610	93.05	-	-	80.58	33.12	6.78	27.43	101	136	A	V
	5726.57	57.04	-11.16	68.2	43.88	33.76	6.86	27.46	101	136	P	V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**Band 3 5470~5725MHz**

**WIFI 802.11be EHT80 Full (Harmonic @ 3m)**

WIFI Ant. 3+4	Note	Frequency ( MHz )	Level ( dBμV/m )	Margin ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)
802.11be EHT80 Full		11060	46.02	-27.98	74	52.37	38.9	11.12	56.37	-	-	P	H
		16590	44.92	-23.28	68.2	49.33	38.04	13.26	55.71	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
CH 106 5530MHz		11060	45.54	-28.46	74	51.89	38.9	11.12	56.37	-	-	P	V
		16590	44.95	-23.25	68.2	49.36	38.04	13.26	55.71	-	-	P	V
													V
													V
													V
													V
													V
													V
													V
													V



WiFi Ant. 3+4	Note	Frequency ( MHz )	Level ( dBµV/m )	Margin ( dB )	Limit Line ( dBµV/m )	Read Level ( dBµV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11be		11220	45.79	-28.21	74	52.03	38.92	11.1	56.26	-	-	P	H
		16830	44.9	-23.3	68.2	49.28	38.07	13.51	55.96	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
EHT80 Full													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
CH 122 5610MHz		11220	47.26	-26.74	74	53.5	38.92	11.1	56.26	-	-	P	V
		16830	46.15	-22.05	68.2	50.53	38.07	13.51	55.96	-	-	P	V
													V
													V
													V
													V
													V
													V
													V
													V
Remark	<ol style="list-style-type: none"> <li>No other spurious found.</li> <li>All results are PASS against Peak and Average limit line.</li> <li>The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.</li> </ol>												



**Band 3 5470~5725MHz**

**WIFI 802.11be EHT160 Full (Band Edge @ 3m)**

WIFI Ant. 3+4	Note	Frequency ( MHz )	Level ( dBμV/m )	Margin ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)
<b>802.11be EHT160 Full CH 114 5570MHz</b>		5457.52	61.99	-12.01	74	49.47	33.1	6.83	27.41	100	239	P	H
		5463.04	60.42	-7.78	68.2	47.9	33.1	6.82	27.4	100	239	P	H
		5458.96	51.94	-2.06	54	39.41	33.1	6.83	27.4	100	239	P	H
	*	5570	94.92	-	-	82.46	33.1	6.78	27.42	100	239	P	H
	*	5570	86.39	-	-	73.93	33.1	6.78	27.42	100	239	A	H
		5725.01	56.59	-11.61	68.2	43.44	33.75	6.86	27.46	100	239	P	H
		5454.64	59.13	-14.87	74	46.61	33.1	6.83	27.41	100	135	P	V
		5469.04	60.73	-7.47	68.2	48.21	33.1	6.82	27.4	100	135	P	V
		5458.96	49.38	-4.62	54	36.85	33.1	6.83	27.4	100	135	A	V
	*	5570	95.42	-	-	82.96	33.1	6.78	27.42	100	135	P	V
	*	5570	85.94	-	-	73.48	33.1	6.78	27.42	100	135	A	V
			5726.57	60.13	-8.07	68.2	46.97	33.76	6.86	27.46	100	135	P
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												





**Band 3 5470~5725MHz**

**WIFI 802.11be EHT160 Full (Harmonic @ 3m)**

WIFI Ant. 3+4	Note	Frequency ( MHz )	Level ( dBμV/m )	Margin ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)
802.11be EHT160 Full CH 114 5570MHz		11140	45.24	-28.76	74	51.54	38.9	11.11	56.31	-	-	P	H
		16710	44.2	-24	68.2	48.55	38.1	13.38	55.83	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
			11140	45.47	-28.53	74	51.77	38.9	11.11	56.31	-	-	P
		16710	44.07	-24.13	68.2	48.42	38.1	13.38	55.83	-	-	P	V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
<b>Remark</b>	<ol style="list-style-type: none"> <li>No other spurious found.</li> <li>All results are PASS against Peak and Average limit line.</li> <li>The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.</li> </ol>												



**Band 3 - Straddle Channel**

**WIFI 802.11a (Band Edge @ 3m)**

WIFI	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.					Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
3+4		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
<b>802.11a CH 144 5720MHz</b>		5457.64	52.58	-21.42	74	40.06	33.1	6.83	27.41	276	15	P	H
		5465.83	51.83	-16.37	68.2	39.31	33.1	6.82	27.4	276	15	P	H
		5458.81	43.45	-10.55	54	30.92	33.1	6.83	27.4	276	15	A	H
	*	5720	107.39	-	-	94.27	33.72	6.86	27.46	276	15	P	H
	*	5720	100.45	-	-	87.33	33.72	6.86	27.46	276	15	A	H
		5924.75	54.8	-13.4	68.2	40.85	34.5	6.96	27.51	276	15	P	H
		5450.62	52.39	-21.61	74	39.87	33.1	6.83	27.41	309	17	P	V
		5469.73	51.8	-16.4	68.2	39.28	33.1	6.82	27.4	309	17	P	V
		5454.91	43.5	-10.5	54	30.98	33.1	6.83	27.41	309	17	A	V
	*	5720	106.8	-	-	93.68	33.72	6.86	27.46	309	17	P	V
	*	5720	99.72	-	-	86.6	33.72	6.86	27.46	309	17	A	V
		5867.25	54.62	-13.58	68.2	40.81	34.37	6.94	27.5	309	17	P	V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 - Straddle Channel  
WIFI 802.11a (Harmonic @ 3m)

WIFI Ant. 3+4	Note	Frequency ( MHz )	Level ( dBμV/m )	Margin ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 144 5720MHz		11440	44.53	-29.47	74	50.43	39.02	11.07	55.99	-	-	P	H
		17160	58.36	-9.84	68.2	62.46	38.28	13.78	56.16	200	19	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
			11440	44.76	-29.24	74	50.66	39.02	11.07	55.99	-	-	P
		17160	60.62	-7.58	68.2	64.72	38.28	13.78	56.16	201	15	P	V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
<b>Remark</b>	<ol style="list-style-type: none"> <li>No other spurious found.</li> <li>All results are PASS against Peak and Average limit line.</li> <li>The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.</li> </ol>												



**Band 3 - Straddle Channel**  
**WIFI 802.11be EHT20 (Band Edge @ 3m)**

WIFI Ant. 3+4	Note	Frequency ( MHz )	Level ( dBμV/m )	Margin ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)
<b>802.11be EHT20 CH 144 5720MHz</b>		5404.99	52.31	-21.69	74	39.77	33.1	6.85	27.41	338	318	P	H
		5467.39	52.76	-15.44	68.2	40.24	33.1	6.82	27.4	338	318	P	H
		5459.59	44.29	-9.71	54	31.76	33.1	6.83	27.4	338	318	A	H
	*	5720	104.13	-	-	91.01	33.72	6.86	27.46	338	318	P	H
	*	5720	97.42	-	-	84.3	33.72	6.86	27.46	338	318	A	H
		5884.5	55.67	-12.53	68.2	41.78	34.44	6.95	27.5	338	318	P	H
		5422.54	52.23	-21.77	74	39.7	33.1	6.84	27.41	324	20	P	V
		5460.76	52.54	-15.66	68.2	40.01	33.1	6.83	27.4	324	20	P	V
		5459.2	44.39	-9.61	54	31.86	33.1	6.83	27.4	324	20	A	V
	*	5720	106.58	-	-	93.46	33.72	6.86	27.46	324	20	P	V
	*	5720	98	-	-	84.88	33.72	6.86	27.46	324	20	A	V
	5905.5	54.35	-13.85	68.2	40.4	34.5	6.96	27.51	324	20	P	V	
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 - Straddle Channel  
WIFI 802.11be EHT20 (Harmonic @ 3m)

WIFI Ant. 3+4	Note	Frequency ( MHz )	Level ( dBµV/m )	Margin ( dB )	Limit Line ( dBµV/m )	Read Level (dBµV)	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)	
802.11be EHT20 CH 144 5720MHz		11440	44.61	-29.39	74	50.51	39.02	11.07	55.99	-	-	P	H	
		17160	60.01	-8.19	68.2	64.11	38.28	13.78	56.16	280	288	P	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
			11440	45.07	-28.93	74	50.97	39.02	11.07	55.99	-	-	P	V
			17160	60.14	-8.06	68.2	64.24	38.28	13.78	56.16	351	0	P	V
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line. 3. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.													



**Band 3 - Straddle Channel**  
**WIFI 802.11be EHT40 (Band Edge @ 3m)**

WIFI Ant. 3+4	Note	Frequency ( MHz )	Level ( dBμV/m )	Margin ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
<b>802.11be EHT40 CH 142 5710MHz</b>		5431.12	53.75	-20.25	74	41.22	33.1	6.84	27.41	100	237	P	H
		5467	53.3	-14.9	68.2	40.78	33.1	6.82	27.4	100	237	P	H
		5446.72	43.66	-10.34	54	31.14	33.1	6.83	27.41	100	237	A	H
	*	5710	104.88	-	-	91.82	33.66	6.85	27.45	100	237	P	H
	*	5710	96.33	-	-	83.27	33.66	6.85	27.45	100	237	A	H
		5918.75	55.61	-12.59	68.2	41.66	34.5	6.96	27.51	100	237	P	H
		5440.87	52.95	-21.05	74	40.43	33.1	6.83	27.41	100	137	P	V
		5470	51.8	-16.4	68.2	39.28	33.1	6.82	27.4	100	137	P	V
		5452.57	43.6	-10.4	54	31.08	33.1	6.83	27.41	100	137	A	V
	*	5710	105.96	-	-	92.9	33.66	6.85	27.45	100	137	P	V
	*	5710	96.09	-	-	83.03	33.66	6.85	27.45	100	137	A	V
	5892.75	55.32	-12.88	68.2	41.4	34.47	6.95	27.5	100	137	P	V	
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 - Straddle Channel  
WIFI 802.11be EHT40 (Harmonic @ 3m)

WIFI Ant. 3+4	Note	Frequency ( MHz )	Level ( dBμV/m )	Margin ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )	
802.11be EHT40 CH 142 5710MHz		11420	46.22	-27.78	74	52.21	39.06	11.07	56.12	-	-	P	H	
		17130	56.5	-11.7	68.2	60.93	38.19	13.76	56.38	100	59	P	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
			11420	45.47	-28.53	74	51.46	39.06	11.07	56.12	-	-	P	V
			17130	59.02	-9.18	68.2	63.45	38.19	13.76	56.38	100	83	P	V
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
<b>Remark</b>	<ol style="list-style-type: none"> <li>No other spurious found.</li> <li>All results are PASS against Peak and Average limit line.</li> <li>The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.</li> </ol>													



**Band 3 - Straddle Channel**  
**WIFI 802.11be EHT80 Full (Band Edge @ 3m)**

WIFI Ant. 3+4	Note	Frequency ( MHz )	Level ( dBμV/m )	Margin ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)
<b>802.11be EHT80 Full CH 138 5690MHz</b>		5434.63	53.92	-20.08	74	41.39	33.1	6.84	27.41	100	235	P	H
		5461.54	52.8	-15.4	68.2	40.27	33.1	6.83	27.4	100	235	P	H
		5442.43	43.94	-10.06	54	31.42	33.1	6.83	27.41	100	235	A	H
	*	5690	103.52	-	-	90.61	33.52	6.84	27.45	100	235	P	H
	*	5690	93.86	-	-	80.95	33.52	6.84	27.45	100	235	A	H
		5894.2	56.06	-12.14	68.2	42.13	34.48	6.95	27.5	100	235	P	H
		5439.31	53.3	-20.7	74	40.78	33.1	6.83	27.41	100	132	P	V
		5462.32	53.22	-14.98	68.2	40.69	33.1	6.83	27.4	100	132	P	V
		5459.98	43.71	-10.29	54	31.18	33.1	6.83	27.4	100	132	A	V
	*	5690	103.38	-	-	90.47	33.52	6.84	27.45	100	132	P	V
*	5690	93.16	-	-	80.25	33.52	6.84	27.45	100	132	A	V	
		5850.4	55.72	-12.48	68.2	41.97	34.3	6.94	27.49	100	132	P	V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												





**Band 3 - Straddle Channel**  
**WIFI 802.11be EHT80 Full (Harmonic @ 3m)**

WIFI Ant. 3+4	Note	Frequency ( MHz )	Level ( dBµV/m )	Margin ( dB )	Limit Line ( dBµV/m )	Read Level (dBµV)	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)	
802.11be EHT80 Full CH 138 5690MHz		11380	45.82	-28.18	74	51.81	39.08	11.08	56.15	-	-	P	H	
		17070	47.61	-20.59	68.2	52.09	38.07	13.72	56.27	-	-	P	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
			11380	45.69	-28.31	74	51.68	39.08	11.08	56.15	-	-	P	V
			17070	56.13	-12.07	68.2	60.61	38.07	13.72	56.27	111	84	P	V
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line. 3. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.													



Emission above 18GHz

WIFI 802.11be EHT40 (SHF @ 1m)

WIFI	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.	
Ant.					Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.		
3+4		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	(dBμV)	( dB/m )	( dB )	( dB )	( cm )	( deg )	(P/A)	(H/V)	
802.11be EHT40 SHF		24246	40.84	-27.36	68.2	58.09	38.89	-2.54	53.6	-	-	P	H	
		39506	47.15	-26.85	74	59.83	44.39	-0.68	56.39	-	-	P	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
			24705	41.05	-27.15	68.2	57.76	39.11	-2.54	53.28	-	-	P	V
			39415	47.41	-26.59	74	60.3	44.3	-0.72	56.47	-	-	P	V
														V
														V
														V
														V
														V
														V
														V
													V	
<b>Remark</b>	<ol style="list-style-type: none"> <li>No other spurious found.</li> <li>All results are PASS against limit line.</li> <li>The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.</li> </ol>													



Emission below 1GHz

WIFI 802.11be EHT40 (LF @ 3m)

WIFI Ant.	Note	Frequency	Level	Margin	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.	
3+4		( MHz )	( dBµV/m )	( dB )	( dBµV/m )	( dBµV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )	
802.11be EHT40 LF		30.27	23.81	-16.19	40	30.3	24.85	0.82	32.16	-	-	P	H	
		128.55	18.98	-24.52	43.5	32.12	17.7	1.28	32.12	-	-	P	H	
		261.39	20.33	-25.67	46	30.51	20.16	1.72	32.06	-	-	P	H	
		505.1	24.84	-21.16	46	30.65	24.05	2.23	32.09	-	-	P	H	
		717.9	33.73	-12.27	46	36.09	27.05	2.66	32.07	-	-	P	H	
		902	37.46	-8.54	46	36.88	28.96	2.98	31.36	-	-	P	H	
														H
														H
														H
														H
														H
														H
			30.81	22.93	-17.07	40	29.58	24.69	0.82	32.16	-	-	P	V
			132.6	17.72	-25.78	43.5	30.86	17.68	1.29	32.11	-	-	P	V
			258.42	20.18	-25.82	46	30.75	19.78	1.71	32.06	-	-	P	V
			560.4	27.24	-18.76	46	30.64	26.4	2.27	32.07	-	-	P	V
			903.4	36.35	-9.65	46	35.75	28.97	2.98	31.35	-	-	P	V
			989.5	34.04	-19.96	54	30.83	30.64	3.14	30.57	-	-	P	V
														V
														V
													V	
													V	
													V	
													V	
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against limit line. 3. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.													



**Band 4 - 5725~5850MHz**

**WIFI 802.11a (Band Edge @ 3m)**

WIFI	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.	
Ant.					Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.		
3+4		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	(P/A)	(H/V)	
802.11a CH 149 5745MHz		5613	51.97	-16.23	68.2	39.49	33.13	6.78	27.43	100	116	P	H	
		5697.4	53.73	-49.55	103.28	40.76	33.58	6.84	27.45	100	116	P	H	
		5718.4	59.92	-50.43	110.35	46.81	33.71	6.86	27.46	100	116	P	H	
		5722.6	68.27	-48.46	116.73	55.13	33.74	6.86	27.46	100	116	P	H	
	*	5745	106.52	-	-	93.23	33.87	6.88	27.46	100	116	P	H	
	*	5745	99.41	-	-	86.12	33.87	6.88	27.46	100	116	A	H	
														H
														H
			5649.2	52.5	-15.7	68.2	39.93	33.2	6.81	27.44	356	113	P	V
			5694.6	52.35	-48.87	101.22	39.4	33.56	6.84	27.45	356	113	P	V
			5716	60.28	-49.4	109.68	47.18	33.7	6.86	27.46	356	113	P	V
			5722.4	66.52	-49.75	116.27	53.39	33.73	6.86	27.46	356	113	P	V
	*		5745	108.84	-	-	95.55	33.87	6.88	27.46	356	113	P	V
	*		5745	101.82	-	-	88.53	33.87	6.88	27.46	356	113	A	V
														V
														V



WIFI Ant. 3+4	Note	Frequency ( MHz )	Level ( dBµV/m )	Margin ( dB )	Limit Line ( dBµV/m )	Read Level ( dBµV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)	
802.11a CH 157 5785MHz		5617.4	52.38	-15.82	68.2	39.9	33.13	6.78	27.43	100	115	P	H	
		5693.2	52.65	-47.54	100.19	39.71	33.55	6.84	27.45	100	115	P	H	
		5704	54.09	-52.23	106.32	41.07	33.62	6.85	27.45	100	115	P	H	
		5723	52.24	-65.4	117.64	39.1	33.74	6.86	27.46	100	115	P	H	
	*	5785	107.43	-	-	93.88	34.11	6.91	27.47	100	115	P	H	
	*	5785	100.02	-	-	86.47	34.11	6.91	27.47	100	115	A	H	
		5851.2	52.79	-66.67	119.46	39.04	34.3	6.94	27.49	100	115	P	H	
		5871.6	53.65	-52.5	106.15	39.81	34.39	6.95	27.5	100	115	P	H	
		5900.2	53.88	-32.63	86.51	39.92	34.5	6.96	27.5	100	115	P	H	
		5940.2	53.91	-14.29	68.2	39.95	34.5	6.97	27.51	100	115	P	H	
														H
														H
			5608	52.36	-15.84	68.2	39.89	33.12	6.78	27.43	372	110	P	V
			5656.8	53.36	-19.89	73.25	40.74	33.25	6.81	27.44	372	110	P	V
			5700	53.69	-51.51	105.2	40.69	33.6	6.85	27.45	372	110	P	V
			5722.6	51.33	-65.4	116.73	38.19	33.74	6.86	27.46	372	110	P	V
	*		5785	108.96	-	-	95.41	34.11	6.91	27.47	372	110	P	V
	*		5785	102.32	-	-	88.77	34.11	6.91	27.47	372	110	A	V
			5852.4	53.65	-63.08	116.73	39.89	34.31	6.94	27.49	372	110	P	V
			5867.4	53.3	-54.03	107.33	39.49	34.37	6.94	27.5	372	110	P	V
		5913.2	54.63	-22.27	76.9	40.68	34.5	6.96	27.51	372	110	P	V	
		5949.8	53.8	-14.4	68.2	39.85	34.5	6.97	27.52	372	110	P	V	
													V	
													V	



WiFi Ant. 3+4	Note	Frequency ( MHz )	Level ( dBµV/m )	Margin ( dB )	Limit Line ( dBµV/m )	Read Level ( dBµV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )	
802.11a CH 165 5825MHz	*	5825	106.73	-	-	93.03	34.25	6.93	27.48	113	118	P	H	
	*	5825	99.52	-	-	85.82	34.25	6.93	27.48	113	118	A	H	
		5850.4	62.27	-59.02	121.29	48.52	34.3	6.94	27.49	113	118	P	H	
		5855	60.04	-50.76	110.8	46.27	34.32	6.94	27.49	113	118	P	H	
		5912.8	55.06	-22.14	77.2	41.11	34.5	6.96	27.51	113	118	P	H	
		5929.6	53.57	-14.63	68.2	39.61	34.5	6.97	27.51	113	118	P	H	
														H
														H
	*	5825	108.91	-	-	95.21	34.25	6.93	27.48	366	112	P	V	
	*	5825	101.87	-	-	88.17	34.25	6.93	27.48	366	112	A	V	
		5852.4	62.76	-53.97	116.73	49	34.31	6.94	27.49	366	112	P	V	
		5857.6	59.8	-50.27	110.07	46.02	34.33	6.94	27.49	366	112	P	V	
		5880.4	54.17	-47.02	101.19	40.3	34.42	6.95	27.5	366	112	P	V	
		5932	53.65	-14.55	68.2	39.69	34.5	6.97	27.51	366	112	P	V	
														V
														V
													V	
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.													



Band 4 5725~5850MHz

WIFI 802.11a (Harmonic @ 3m)

WIFI Ant. 3+4	Note	Frequency ( MHz )	Level ( dBμV/m )	Margin ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11a CH 149 5745MHz		11490	44.84	-29.16	74	50.83	38.92	11.06	55.97	-	-	P	H
		17235	62.48	-5.72	68.2	66.56	38.37	13.83	56.28	110	60	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
			11488	44.62	-29.38	74	50.61	38.92	11.06	55.97	-	-	P
		17235	64.56	-3.64	68.2	68.64	38.37	13.83	56.28	112	96	P	V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V



WIFI Ant. 3+4	Note	Frequency ( MHz )	Level ( dBµV/m )	Margin ( dB )	Limit Line ( dBµV/m )	Read Level ( dBµV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 157 5785MHz		11570	46.02	-27.98	74	52.16	38.76	11.06	55.96	-	-	P	H
		17355	61.35	-6.85	68.2	65.39	38.52	13.9	56.46	105	58	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
			11570	45.5	-28.5	74	51.64	38.76	11.06	55.96	-	-	P
		17355	66.22	-1.98	68.2	70.26	38.52	13.9	56.46	109	59	P	V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V





WIFI Ant. 3+4	Note	Frequency ( MHz )	Level ( dBµV/m )	Margin ( dB )	Limit Line ( dBµV/m )	Read Level ( dBµV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11a CH 165 5825MHz		11650	46.51	-27.49	74	52.82	38.6	11.05	55.96	-	-	P	H
		17475	61.26	-6.94	68.2	65.07	38.85	13.98	56.64	102	78	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
			11650	46.67	-27.33	74	52.98	38.6	11.05	55.96	-	-	P
		17475	66.52	-1.68	68.2	70.33	38.85	13.98	56.64	109	97	P	V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
<b>Remark</b>	<ol style="list-style-type: none"> <li>No other spurious found.</li> <li>All results are PASS against Peak and Average limit line.</li> <li>The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.</li> </ol>												



**Band 4 5725~5850MHz**

**WIFI 802.11be EHT20 (Band Edge @ 3m)**

WIFI Ant. 3+4	Note	Frequency ( MHz )	Level ( dBμV/m )	Margin ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )	
802.11be EHT20 CH 149 5745MHz		5642.4	52.52	-15.68	68.2	39.98	33.18	6.8	27.44	100	118	P	H	
		5693.2	53.35	-46.84	100.19	40.41	33.55	6.84	27.45	100	118	P	H	
		5719.8	66.89	-43.85	110.74	53.77	33.72	6.86	27.46	100	118	P	H	
		5722.6	76.32	-40.41	116.73	63.18	33.74	6.86	27.46	100	118	P	H	
	*	5745	107.16	-	-	93.87	33.87	6.88	27.46	100	118	P	H	
	*	5745	99.12	-	-	85.83	33.87	6.88	27.46	100	118	A	H	
														H
														H
			5620	53.7	-14.5	68.2	41.21	33.14	6.78	27.43	357	113	P	V
			5695.6	54.22	-47.74	101.96	41.27	33.56	6.84	27.45	357	113	P	V
			5719.8	67.63	-43.11	110.74	54.51	33.72	6.86	27.46	357	113	P	V
			5724.2	77.06	-43.32	120.38	63.91	33.75	6.86	27.46	357	113	P	V
	*		5745	107.97	-	-	94.68	33.87	6.88	27.46	357	113	P	V
	*		5745	100.55	-	-	87.26	33.87	6.88	27.46	357	113	A	V
													V	
													V	



WiFi Ant. 3+4	Note	Frequency ( MHz )	Level ( dBμV/m )	Margin ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
		5612.4	53.33	-14.87	68.2	40.86	33.12	6.78	27.43	100	115	P	H
		5678.2	52.73	-36.38	89.11	39.92	33.43	6.83	27.45	100	115	P	H
		5700.8	53.38	-52.04	105.42	40.38	33.6	6.85	27.45	100	115	P	H
		5724.8	53.05	-68.69	121.74	39.9	33.75	6.86	27.46	100	115	P	H
	*	5785	107.19	-	-	93.64	34.11	6.91	27.47	100	115	P	H
	*	5785	99.12	-	-	85.57	34.11	6.91	27.47	100	115	A	H
		5850.4	53.99	-67.3	121.29	40.24	34.3	6.94	27.49	100	115	P	H
		5871.6	53.64	-52.51	106.15	39.8	34.39	6.95	27.5	100	115	P	H
		5900	53.7	-32.96	86.66	39.75	34.5	6.95	27.5	100	115	P	H
		5936.2	53.3	-14.9	68.2	39.34	34.5	6.97	27.51	100	115	P	H
802.11be													H
EHT20													H
CH 157		5623.6	52.35	-15.85	68.2	39.84	33.15	6.79	27.43	352	112	P	V
5785MHz		5668.2	52.92	-28.79	81.71	40.19	33.35	6.82	27.44	352	112	P	V
		5711.8	54.26	-54.25	108.51	41.2	33.67	6.85	27.46	352	112	P	V
		5722.4	52.25	-64.02	116.27	39.12	33.73	6.86	27.46	352	112	P	V
	*	5785	107.96	-	-	94.41	34.11	6.91	27.47	352	112	P	V
	*	5785	100.56	-	-	87.01	34.11	6.91	27.47	352	112	A	V
		5851.2	54.18	-65.28	119.46	40.43	34.3	6.94	27.49	352	112	P	V
		5862.2	53.56	-55.22	108.78	39.76	34.35	6.94	27.49	352	112	P	V
		5899.6	54.88	-32.08	86.96	40.93	34.5	6.95	27.5	352	112	P	V
		5928.4	54.16	-14.04	68.2	40.21	34.5	6.96	27.51	352	112	P	V
													V
													V



WiFi Ant. 3+4	Note	Frequency ( MHz )	Level ( dBμV/m )	Margin ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )	
802.11be EHT20 CH 165 5825MHz	*	5825	106.75	-	-	93.05	34.25	6.93	27.48	100	115	P	H	
	*	5825	99.08	-	-	85.38	34.25	6.93	27.48	100	115	A	H	
		5850.4	65.09	-56.2	121.29	51.34	34.3	6.94	27.49	100	115	P	H	
		5859.4	60.91	-48.66	109.57	47.12	34.34	6.94	27.49	100	115	P	H	
		5890.8	55.58	-37.89	93.47	41.67	34.46	6.95	27.5	100	115	P	H	
		5937	53.51	-14.69	68.2	39.55	34.5	6.97	27.51	100	115	P	H	
														H
														H
	*	5825	107.72	-	-	94.02	34.25	6.93	27.48	364	113	P	V	
	*	5825	99.81	-	-	86.11	34.25	6.93	27.48	364	113	A	V	
		5851	66.15	-53.77	119.92	52.4	34.3	6.94	27.49	364	113	P	V	
		5855	62.49	-48.31	110.8	48.72	34.32	6.94	27.49	364	113	P	V	
		5914.6	53.86	-22.01	75.87	39.91	34.5	6.96	27.51	364	113	P	V	
		5925.4	54.6	-13.6	68.2	40.65	34.5	6.96	27.51	364	113	P	V	
														V
													V	
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.													



**Band 4 5725~5850MHz**

**WIFI 802.11be EHT20 (Harmonic @ 3m)**

WIFI Ant. 3+4	Note	Frequency ( MHz )	Level ( dBμV/m )	Margin ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )	
802.11be EHT20 CH 149 5745MHz		11490	46.12	-27.88	74	52.11	38.92	11.06	55.97	-	-	P	H	
		17235	59.91	-8.29	68.2	63.99	38.37	13.83	56.28	113	70	P	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
			11490	45.68	-28.32	74	51.67	38.92	11.06	55.97	-	-	P	V
			17235	64.24	-3.96	68.2	68.32	38.37	13.83	56.28	100	58	P	V
														V
														V
														V
														V
													V	
													V	
													V	
													V	



WIFI Ant. 3+4	Note	Frequency ( MHz )	Level ( dBµV/m )	Margin ( dB )	Limit Line ( dBµV/m )	Read Level ( dBµV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)	
802.11be EHT20 CH 157 5785MHz		11570	45.55	-28.45	74	51.69	38.76	11.06	55.96	-	-	P	H	
		17355	61.18	-7.02	68.2	65.22	38.52	13.9	56.46	104	74	P	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
			11570	46.12	-27.88	74	52.26	38.76	11.06	55.96	-	-	P	V
			17355	65.85	-2.35	68.2	69.89	38.52	13.9	56.46	107	61	P	V
														V
														V
														V
														V
														V
														V
													V	



WIFI Ant. 3+4	Note	Frequency ( MHz )	Level ( dBµV/m )	Margin ( dB )	Limit Line ( dBµV/m )	Read Level ( dBµV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)	
802.11be EHT20 CH 165 5825MHz		11650	45.89	-28.11	74	52.2	38.6	11.05	55.96	-	-	P	H	
		17475	63.38	-4.82	68.2	67.19	38.85	13.98	56.64	140	74	P	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
			11650	45.4	-28.6	74	51.71	38.6	11.05	55.96	-	-	P	V
			17475	66.48	-1.72	68.2	70.29	38.85	13.98	56.64	108	60	P	V
														V
														V
														V
														V
														V
														V
													V	
													V	
													V	
<b>Remark</b>	<ol style="list-style-type: none"> <li>No other spurious found.</li> <li>All results are PASS against Peak and Average limit line.</li> <li>The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.</li> </ol>													



Band 4 5725~5850MHz

WIFI 802.11be EHT40 (Band Edge @ 3m)

WIFI Ant. 3+4	Note	Frequency ( MHz )	Level ( dBμV/m )	Margin ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
		5618.8	52.95	-15.25	68.2	40.46	33.14	6.78	27.43	100	297	P	H
		5693.6	57.95	-42.53	100.48	45.01	33.55	6.84	27.45	100	297	P	H
		5715.8	71.77	-37.86	109.63	58.68	33.69	6.86	27.46	100	297	P	H
		5720.4	72.28	-39.43	111.71	59.16	33.72	6.86	27.46	100	297	P	H
	*	5755	104.48	-	-	91.13	33.93	6.89	27.47	100	297	P	H
	*	5755	95.32	-	-	81.97	33.93	6.89	27.47	100	297	A	H
		5853.4	54.05	-60.4	114.45	40.29	34.31	6.94	27.49	100	297	P	H
		5865.8	54.71	-53.06	107.77	40.91	34.36	6.94	27.5	100	297	P	H
		5895.2	54.9	-35.31	90.21	40.97	34.48	6.95	27.5	100	297	P	H
		5945.2	54.45	-13.75	68.2	40.5	34.5	6.97	27.52	100	297	P	H
<b>802.11be</b>													H
<b>EHT40</b>													H
<b>CH 151</b>		5604.4	54.23	-13.97	68.2	41.78	33.11	6.77	27.43	314	116	P	V
<b>5755MHz</b>		5699.4	61.1	-43.66	104.76	48.11	33.6	6.84	27.45	314	116	P	V
		5720	77.56	-33.24	110.8	64.44	33.72	6.86	27.46	314	116	P	V
		5721.8	77.79	-37.11	114.9	64.66	33.73	6.86	27.46	314	116	P	V
	*	5755	104.9	-	-	91.55	33.93	6.89	27.47	314	116	P	V
	*	5755	96.7	-	-	83.35	33.93	6.89	27.47	314	116	A	V
		5851.4	55.24	-63.77	119.01	41.48	34.31	6.94	27.49	314	116	P	V
		5855.8	56.1	-54.48	110.58	42.33	34.32	6.94	27.49	314	116	P	V
		5916.2	55.39	-19.3	74.69	41.44	34.5	6.96	27.51	314	116	P	V
		5928.4	54.36	-13.84	68.2	40.41	34.5	6.96	27.51	314	116	P	V
													V
													V





WIFI Ant. 3+4	Note	Frequency ( MHz )	Level ( dBμV/m )	Margin ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)
		5624	53.89	-14.31	68.2	41.38	33.15	6.79	27.43	100	296	P	H
		5663.2	54.27	-23.73	78	41.58	33.31	6.82	27.44	100	296	P	H
		5715	55.11	-54.29	109.4	42.02	33.69	6.86	27.46	100	296	P	H
		5724.4	56.99	-63.84	120.83	43.84	33.75	6.86	27.46	100	296	P	H
	*	5795	103.76	-	-	90.15	34.17	6.92	27.48	100	296	P	H
	*	5795	94.87	-	-	81.26	34.17	6.92	27.48	100	296	A	H
		5850	60.44	-61.76	122.2	46.69	34.3	6.94	27.49	100	296	P	H
		5861.2	62.81	-46.25	109.06	49.02	34.34	6.94	27.49	100	296	P	H
		5881.6	54.98	-45.32	100.3	41.1	34.43	6.95	27.5	100	296	P	H
		5937.4	54.55	-13.65	68.2	40.59	34.5	6.97	27.51	100	296	P	H
802.11be													H
EHT40													H
CH 159		5631.4	54.23	-13.97	68.2	41.71	33.16	6.79	27.43	344	115	P	V
5795MHz		5685	53.91	-40.22	94.13	41.05	33.48	6.83	27.45	344	115	P	V
		5719.8	56.24	-54.5	110.74	43.12	33.72	6.86	27.46	344	115	P	V
		5723.6	55.87	-63.14	119.01	42.73	33.74	6.86	27.46	344	115	P	V
	*	5795	105.58	-	-	91.97	34.17	6.92	27.48	344	115	P	V
	*	5795	96.48	-	-	82.87	34.17	6.92	27.48	344	115	A	V
		5850.4	62.67	-58.62	121.29	48.92	34.3	6.94	27.49	344	115	P	V
		5861.4	65.39	-43.62	109.01	51.59	34.35	6.94	27.49	344	115	P	V
		5881.6	58.09	-42.21	100.3	44.21	34.43	6.95	27.5	344	115	P	V
		5945.8	54.83	-13.37	68.2	40.88	34.5	6.97	27.52	344	115	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**Band 4 5725~5850MHz**

**WIFI 802.11be EHT40 (Harmonic @ 3m)**

WIFI Ant. 3+4	Note	Frequency ( MHz )	Level ( dBμV/m )	Margin ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )	
802.11be EHT40 CH 151 5755MHz		11510	45.76	-28.24	74	51.88	38.88	11.07	56.07	-	-	P	H	
		17265	56.55	-11.65	68.2	61.01	38.33	13.84	56.63	100	71	P	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
			11510	45.77	-28.23	74	51.89	38.88	11.07	56.07	-	-	P	V
			17265	61.39	-6.81	68.2	65.85	38.33	13.84	56.63	100	86	P	V
														V
														V
														V
														V
													V	
													V	
													V	
													V	
													V	



WIFI Ant. 3+4	Note	Frequency ( MHz )	Level ( dBµV/m )	Margin ( dB )	Limit Line ( dBµV/m )	Read Level ( dBµV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)
802.11be EHT40 CH 159 5795MHz		11590	45.53	-28.47	74	51.82	38.72	11.06	56.07	-	-	P	H
		17385	58.32	-9.88	68.2	62.6	38.64	13.93	56.85	100	69	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
			11590	45.72	-28.28	74	52.01	38.72	11.06	56.07	-	-	P
		17385	64.85	-3.35	68.2	69.13	38.64	13.93	56.85	100	58	P	V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
<b>Remark</b>	<ol style="list-style-type: none"> <li>No other spurious found.</li> <li>All results are PASS against Peak and Average limit line.</li> <li>The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.</li> </ol>												



Band 4 5725~5850MHz

WIFI 802.11be EHT80 (Band Edge @ 3m)

WIFI Ant. 3+4	Note	Frequency ( MHz )	Level ( dBμV/m )	Margin ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
		5649.8	57.47	-10.73	68.2	44.9	33.2	6.81	27.44	100	298	P	H
		5699.4	69.84	-34.92	104.76	56.85	33.6	6.84	27.45	100	298	P	H
		5719.8	74.44	-36.3	110.74	61.32	33.72	6.86	27.46	100	298	P	H
		5723.6	75.6	-43.41	119.01	62.46	33.74	6.86	27.46	100	298	P	H
	*	5775	100.91	-	-	87.43	34.05	6.9	27.47	100	298	P	H
	*	5775	92.23	-	-	78.75	34.05	6.9	27.47	100	298	A	H
		5850.8	70.17	-50.21	120.38	56.42	34.3	6.94	27.49	100	298	P	H
		5870.8	70.72	-35.65	106.37	56.9	34.38	6.94	27.5	100	298	P	H
		5876	64.38	-40.08	104.46	50.53	34.4	6.95	27.5	100	298	P	H
		5930.6	56.96	-11.24	68.2	43	34.5	6.97	27.51	100	298	P	H
802.11be													H
EHT80													H
CH 155		5640.2	55.95	-12.25	68.2	43.41	33.18	6.8	27.44	327	118	P	V
5775MHz		5682	68.16	-23.76	91.92	55.32	33.46	6.83	27.45	327	118	P	V
		5716.2	72.38	-37.36	109.74	59.28	33.7	6.86	27.46	327	118	P	V
		5721.8	73.94	-40.96	114.9	60.81	33.73	6.86	27.46	327	118	P	V
	*	5775	102.49	-	-	89.01	34.05	6.9	27.47	327	118	P	V
	*	5775	93.72	-	-	80.24	34.05	6.9	27.47	327	118	A	V
		5852	72.79	-44.85	117.64	59.03	34.31	6.94	27.49	327	118	P	V
		5862	73.72	-35.12	108.84	59.92	34.35	6.94	27.49	327	118	P	V
		5882	66.8	-33.2	100	52.92	34.43	6.95	27.5	327	118	P	V
		5931	58.53	-9.67	68.2	44.57	34.5	6.97	27.51	327	118	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11be EHT80 (Harmonic @ 3m)

WIFI Ant. 3+4	Note	Frequency ( MHz )	Level ( dBμV/m )	Margin ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )	
802.11be EHT80 CH 155 5775MHz		11550	46.04	-27.96	74	52.25	38.8	11.06	56.07	-	-	P	H	
		17325	56.93	-11.27	68.2	61.38	38.4	13.89	56.74	100	69	P	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
			11590	45.63	-28.37	74	51.92	38.72	11.06	56.07	-	-	P	V
			17325	60.99	-7.21	68.2	65.44	38.4	13.89	56.74	100	58	P	V
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
<b>Remark</b>	<ol style="list-style-type: none"> <li>No other spurious found.</li> <li>All results are PASS against Peak and Average limit line.</li> <li>The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.</li> </ol>													



Band 4 5725~5850MHz

Emission above 18GHz

WIFI 802.11a (SHF @ 1m)

WIFI Ant.	Note	Frequency	Level	Margin	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
3+4		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
802.11a SHF		20096	44.48	-29.52	74	65.21	37.51	-3.34	54.9	-	-	P	H
		31334	45.64	-28.36	74	62.73	40.93	-1.62	56.4	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
			18712	45.08	-28.92	74	66.12	37.92	-3.49	55.47	-	-	P
		31418	44.84	-29.16	74	62.36	40.56	-1.58	56.5	-	-	P	V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against limit line. 3. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.												



Emission below 1GHz

5GHz WIFI 802.11a (LF @ 3m)

WIFI	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.	
Ant.					Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.		
3+4		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )	
802.11a LF		77.53	26.07	-13.93	40	43.88	13.13	1.2	32.14	-	-	P	H	
		95.96	32.01	-11.49	43.5	47.38	15.48	1.29	32.14	-	-	P	H	
		329.73	25.78	-20.22	46	36.02	19.91	1.92	32.07	-	-	P	H	
		637.22	28.57	-17.43	46	31.83	26.33	2.38	31.97	-	-	P	H	
		734.22	31.29	-14.71	46	32.92	27.74	2.67	32.04	-	-	P	H	
		980.6	33.36	-20.64	54	30.42	30.69	2.91	30.66	-	-	P	H	
														H
														H
														H
														H
														H
														H
			30.97	32.96	-7.04	40	39.96	24.17	0.99	32.16	-	-	P	V
			92.08	28.12	-15.38	43.5	44.1	14.89	1.27	32.14	-	-	P	V
			329.73	21.41	-24.59	46	31.65	19.91	1.92	32.07	-	-	P	V
			566.41	26.44	-19.56	46	30.14	26.09	2.26	32.05	-	-	P	V
			733.25	31.37	-14.63	46	33.04	27.7	2.67	32.04	-	-	P	V
			964.11	33.24	-20.76	54	30	31.17	2.9	30.83	-	-	P	V
													V	
													V	
													V	
													V	
													V	
													V	
Remark	<ol style="list-style-type: none"> <li>No other spurious found.</li> <li>All results are PASS against limit line.</li> <li>The emission position marked as "-" means no suspected emission found and emission level has at least 6dB margin against limit or emission is noise floor only.</li> </ol>													



**Note symbol**

*	<b>Fundamental Frequency</b> which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is <b>over limit</b> line.
P/A	<b>Peak</b> or <b>Average</b>
H/V	<b>Horizontal</b> or <b>Vertical</b>





A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
3+4					Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
802.11a		5150	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 36		5150	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H
5180MHz													

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) = Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Margin (dB) = Level(dBμV/m) – Limit Line(dBμV/m)

**For Peak Limit @ 5150MHz:**

1. Level(dBμV/m)  
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)  
= 55.45 (dBμV/m)
2. Margin (dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 55.45(dBμV/m) – 74(dBμV/m)  
= -18.55(dB)

**For Average Limit @ 5150MHz:**

1. Level(dBμV/m)  
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)  
= 43.54 (dBμV/m)
2. Margin (dB) = Level(dBμV/m) – Limit Line(dBμV/m)  
= 43.54(dBμV/m) – 54(dBμV/m)  
= -10.46(dB)

**Both peak and average measured complies with the limit line, so test result is “PASS”.**



## Appendix D. Radiated Spurious Emission





Test Engineer :	Jacky Hung, Mancy Chou, Michael Liu and Rain Lee	Temperature :	20~26°C
		Relative Humidity :	40~65%

### Note symbol





-L	Low channel location
-R	High channel location







**Band 1 - 5150~5250MHz**  
**WIFI 802.11a (Band Edge @ 3m)**

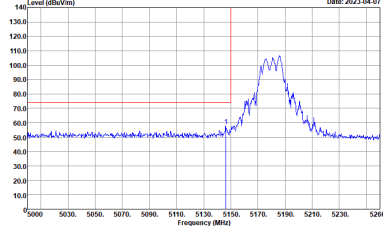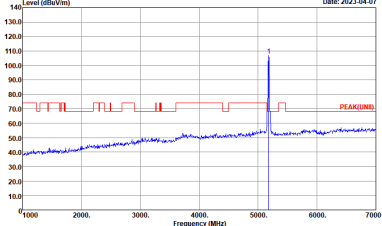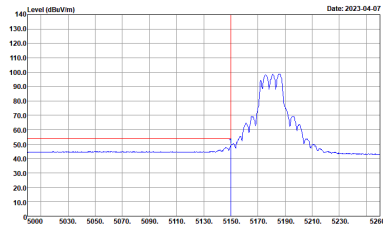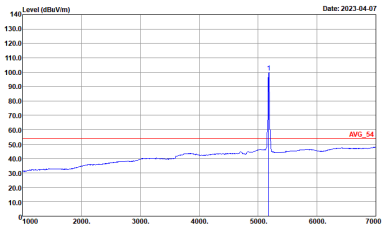WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11a CH36 5180MHz	
3+4	Horizontal	Fundamental
<b>Peak</b>	 <p>Site : 03CH13-HY            Condition : PEAK_BE_74 3m HORN_91200_1326 HORIZONTAL            : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	 <p>Site : 03CH13-HY            Condition : PEAK(LINE) 3m HORN_91200_1326 HORIZONTAL            : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>
<b>Avg.</b>	 <p>Site : 03CH13-HY            Condition : AV6_BE_54 3m HORN_91200_1326 HORIZONTAL            : RBW:1000.000kHz VBW:1000kHz SWT:Auto</p>	 <p>Site : 03CH13-HY            Condition : AV6_54 3m HORN_91200_1326 HORIZONTAL            : RBW:1000.000kHz VBW:1000kHz SWT:Auto</p>

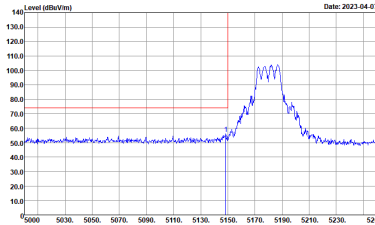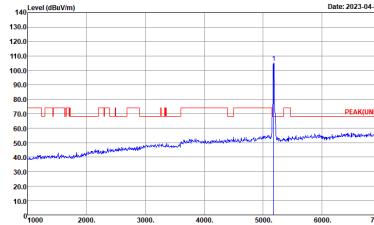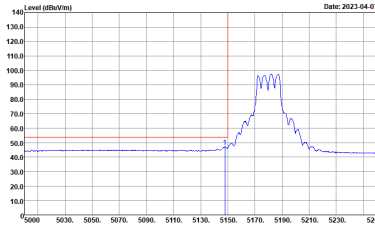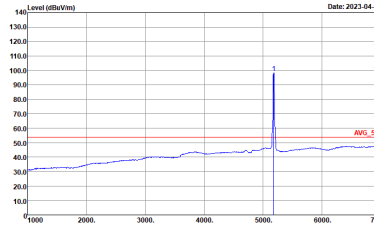

WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11a CH36 5180MHz	
3+4	Vertical	Fundamental
Peak	 <p>Site : 03CH13-HY Condition : PEAK_BE_74 3m HORN_91200_1326 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Site : 03CH13-HY Condition : PEAK(LINE)I 3m HORN_91200_1326 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	 <p>Site : 03CH13-HY Condition : AVG_BE_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000KHz VBW:1.000KHz SWT:Auto</p>	 <p>Site : 03CH13-HY Condition : AVG_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000KHz VBW:1.000KHz SWT:Auto</p>

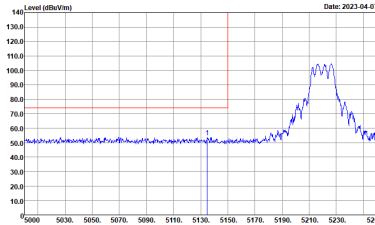
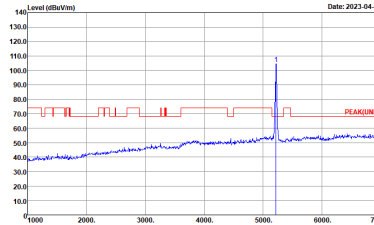
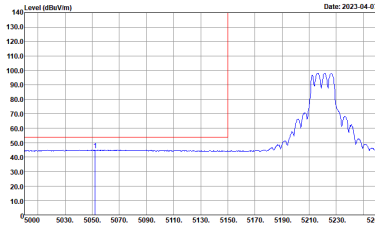
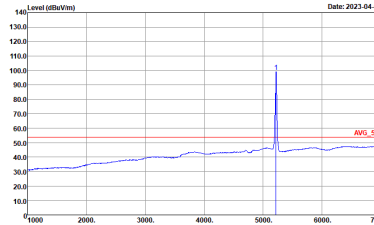


WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11a CH44 5220MHz - L	
3+4	Horizontal	Fundamental
Peak	 <p>Level (dBm/Vm) vs Frequency (MHz) plot for Peak Horizontal. The plot shows a signal level around 70 dBm/Vm with a peak at approximately 5220 MHz. The x-axis ranges from 5000 to 5260 MHz, and the y-axis ranges from 10.0 to 140.0 dBm/Vm.</p> <p>Site : 03CH13-HY Condition : PEAK_BE_74 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Level (dBm/Vm) vs Frequency (MHz) plot for Peak Fundamental. The plot shows a signal level around 70 dBm/Vm with a peak at approximately 5220 MHz. The x-axis ranges from 4000 to 7000 MHz, and the y-axis ranges from 10.0 to 140.0 dBm/Vm.</p> <p>Site : 03CH13-HY Condition : PEAK(LINE)I 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	 <p>Level (dBm/Vm) vs Frequency (MHz) plot for Avg Horizontal. The plot shows a signal level around 45 dBm/Vm with a peak at approximately 5220 MHz. The x-axis ranges from 5000 to 5260 MHz, and the y-axis ranges from 10.0 to 140.0 dBm/Vm.</p> <p>Site : 03CH13-HY Condition : AVG_BE_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000KHz VBW:1.000KHz SWT:Auto</p>	 <p>Level (dBm/Vm) vs Frequency (MHz) plot for Avg Fundamental. The plot shows a signal level around 45 dBm/Vm with a peak at approximately 5220 MHz. The x-axis ranges from 4000 to 7000 MHz, and the y-axis ranges from 10.0 to 140.0 dBm/Vm.</p> <p>Site : 03CH13-HY Condition : AVG_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000KHz VBW:1.000KHz SWT:Auto</p>



WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11a CH44 5220MHz - R	
3+4	Horizontal	Fundamental
Peak		Left blank
Avg.		Left blank

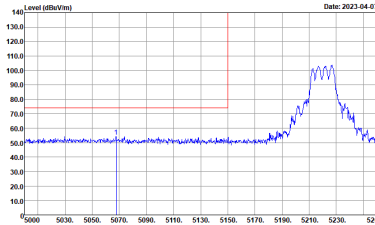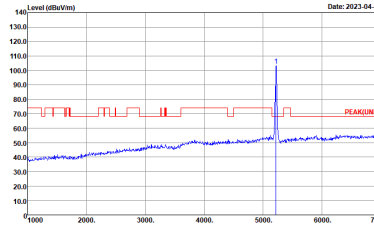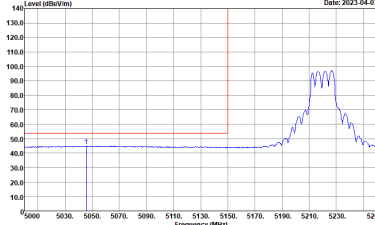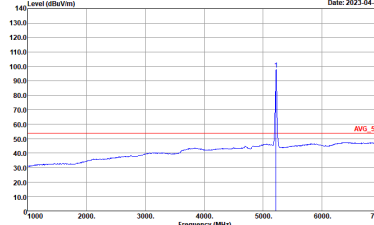





WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11a CH44 5220MHz - L	
3+4	Vertical	Fundamental
Peak	 <p>Site : 03CH13-HY Condition : PEAK_BE_74 3m HORN_91200_1326 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Site : 03CH13-HY Condition : PEAK(LINE)I 3m HORN_91200_1326 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	 <p>Site : 03CH13-HY Condition : AVG_BE_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000KHz VBW:1.000KHz SWT:Auto</p>	 <p>Site : 03CH13-HY Condition : AVG_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000KHz VBW:1.000KHz SWT:Auto</p>



WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11a CH44 5220MHz - R	
3+4	Vertical	Fundamental
Peak	<p>Site : 03CH13-HY Condition : PEAK_BE_74 3m HORN_91200_1326 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	Left blank
Avg.	<p>Site : 03CH13-HY Condition : AVG_BE_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000KHz VBW:1.000KHz SWT:Auto</p>	Left blank



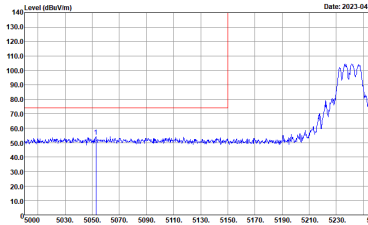
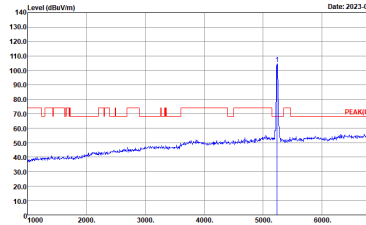
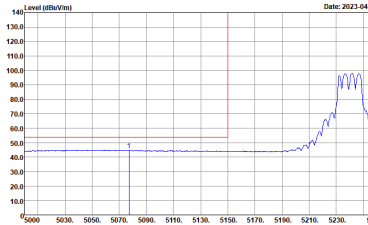
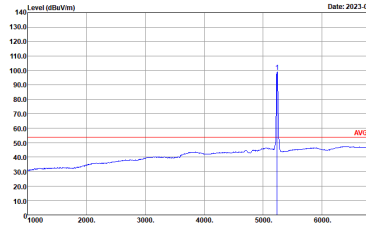


WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11a CH48 5240MHz - L	
3+4	Horizontal	Fundamental
Peak	 <p>Level (dBm/Vm) vs Frequency (MHz) plot showing a peak at 5240 MHz. The y-axis ranges from 10.0 to 140.0 dBm/Vm, and the x-axis ranges from 5000 to 5260 MHz. A red vertical line marks the peak at 5240 MHz.</p> <p>Site : 03CH13-HY Condition : PEAK_BE_74 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Level (dBm/Vm) vs Frequency (MHz) plot showing a peak at 5240 MHz. The y-axis ranges from 10.0 to 140.0 dBm/Vm, and the x-axis ranges from 1000 to 7000 MHz. A red vertical line marks the peak at 5240 MHz.</p> <p>Site : 03CH13-HY Condition : PEAK(LINE)I 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	 <p>Level (dBm/Vm) vs Frequency (MHz) plot showing an average level at 5240 MHz. The y-axis ranges from 10.0 to 140.0 dBm/Vm, and the x-axis ranges from 5000 to 5260 MHz. A red vertical line marks the average level at 5240 MHz.</p> <p>Site : 03CH13-HY Condition : AVG_BE_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000KHz VBW:1.000KHz SWT:Auto</p>	 <p>Level (dBm/Vm) vs Frequency (MHz) plot showing an average level at 5240 MHz. The y-axis ranges from 10.0 to 140.0 dBm/Vm, and the x-axis ranges from 1000 to 7000 MHz. A red vertical line marks the average level at 5240 MHz.</p> <p>Site : 03CH13-HY Condition : AVG_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000KHz VBW:1.000KHz SWT:Auto</p>





WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11a CH48 5240MHz - R	
3+4	Horizontal	Fundamental
Peak	<p>Site : 03CH13-HY Condition : PEAK_BE_74 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	Left blank
Avg.	<p>Site : 03CH13-HY Condition : AVG_BE_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000KHz VBW:1000KHz SWT:Auto</p>	Left blank

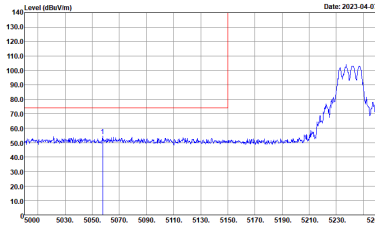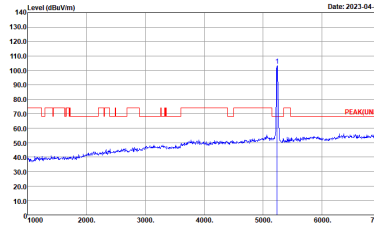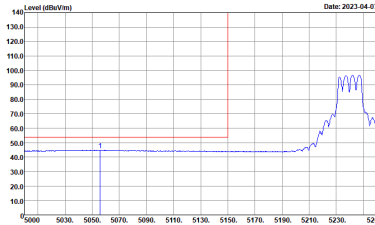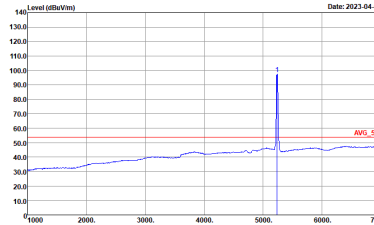





WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11a CH48 5240MHz - L	
3+4	Vertical	Fundamental
Peak	 <p>Level (dBm/100kHz) vs Frequency (MHz) plot. The y-axis ranges from 10.0 to 140.0 dBm/100kHz, and the x-axis ranges from 5000 to 5260 MHz. A red vertical line is at 5150 MHz. A blue trace shows a signal rising from ~50 dBm/100kHz at 5150 MHz to ~100 dBm/100kHz at 5240 MHz. A red horizontal line is at ~75 dBm/100kHz.</p> <p>Site : 03CH13-HY Condition : PEAK_BE_74 3m HORN_91200_1326 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Level (dBm/100kHz) vs Frequency (MHz) plot. The y-axis ranges from 10.0 to 140.0 dBm/100kHz, and the x-axis ranges from 1000 to 7000 MHz. A red horizontal line is at ~75 dBm/100kHz. A blue trace shows a signal rising from ~40 dBm/100kHz at 5000 MHz to ~100 dBm/100kHz at 5240 MHz. A red horizontal line labeled 'PEAK(LINE)' is at ~75 dBm/100kHz.</p> <p>Site : 03CH13-HY Condition : PEAK(LINE) 3m HORN_91200_1326 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	 <p>Level (dBm/100kHz) vs Frequency (MHz) plot. The y-axis ranges from 10.0 to 140.0 dBm/100kHz, and the x-axis ranges from 5000 to 5260 MHz. A red vertical line is at 5150 MHz. A blue trace shows a signal rising from ~40 dBm/100kHz at 5150 MHz to ~100 dBm/100kHz at 5240 MHz. A red horizontal line is at ~75 dBm/100kHz.</p> <p>Site : 03CH13-HY Condition : AVG_BE_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000KHz VBW:1000KHz SWT:Auto</p>	 <p>Level (dBm/100kHz) vs Frequency (MHz) plot. The y-axis ranges from 10.0 to 140.0 dBm/100kHz, and the x-axis ranges from 1000 to 7000 MHz. A red horizontal line is at ~54 dBm/100kHz. A blue trace shows a signal rising from ~40 dBm/100kHz at 5000 MHz to ~100 dBm/100kHz at 5240 MHz. A red horizontal line labeled 'AVG_54' is at ~54 dBm/100kHz.</p> <p>Site : 03CH13-HY Condition : AVG_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000KHz VBW:1000KHz SWT:Auto</p>

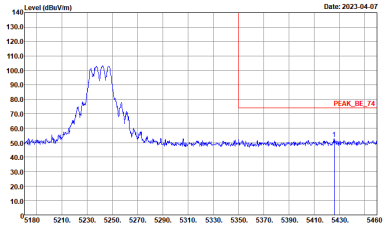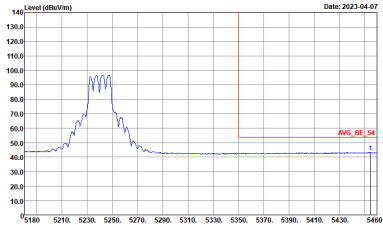





WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11a CH48 5240MHz - R	
3+4	Vertical	Fundamental
Peak	 <p>Site : 03CH13-HY Condition : PEAK_BE_74 3m HORN_91200_1326 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWF:Auto</p>	Left blank
Avg.	 <p>Site : 03CH13-HY Condition : AVG_BE_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000KHz VBW:1.000KHz SWF:Auto</p>	Left blank







**Band 1 5150~5250MHz**  
**WIFI 802.11be EHT20 (Band Edge @ 3m)**

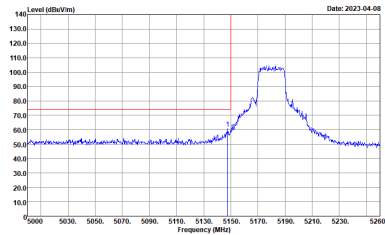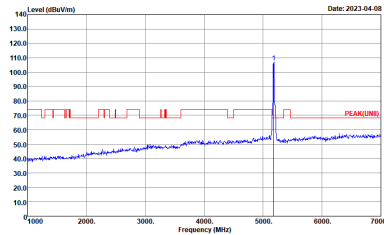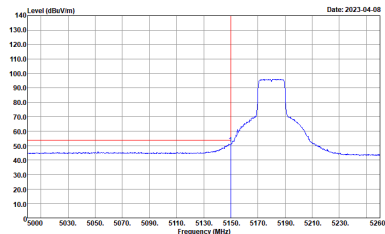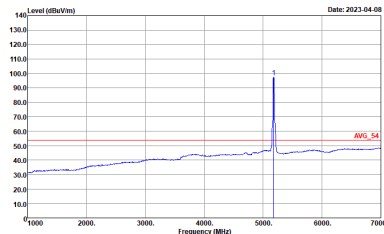WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11be EHT20 CH36 5180MHz	
3+4	Horizontal	Fundamental
Peak	 <p>Site : 03CH13-HY            Condition : PEAK_BE_74 3m HORN_9120D_1326 HORIZONTAL            : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Site : 03CH13-HY            Condition : PEAK(UNIT) 3m HORN_9120D_1326 HORIZONTAL            : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	 <p>Site : 03CH13-HY            Condition : AVG_BE_54 3m HORN_9120D_1326 HORIZONTAL            : RBW:1000.000KHz VBW:3.000KHz SWT:Auto</p>	 <p>Site : 03CH13-HY            Condition : AVG_54 3m HORN_9120D_1326 HORIZONTAL            : RBW:1000.000KHz VBW:3.000KHz SWT:Auto</p>

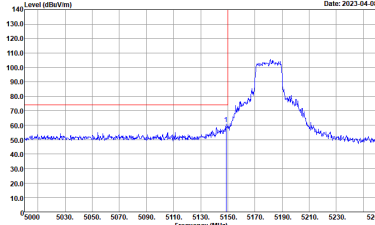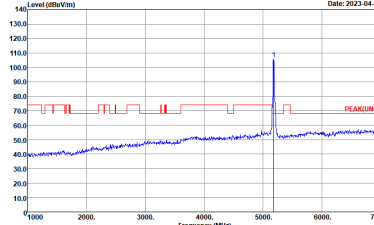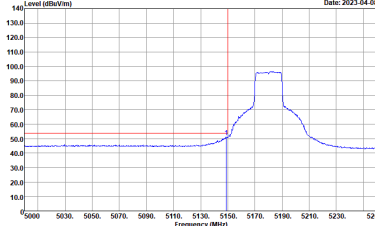
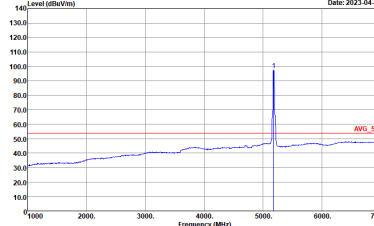


WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11be EHT20 CH36 5180MHz	
3+4	Vertical	Fundamental
Peak	 <p>Site : 03CH13-HY Condition : PEAK_BE_74 3m HORN_91200_1326 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Site : 03CH13-HY Condition : PEAK(LINE) 3m HORN_91200_1326 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	 <p>Site : 03CH13-HY Condition : AVG_BE_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto</p>	 <p>Site : 03CH13-HY Condition : AVG_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto</p>

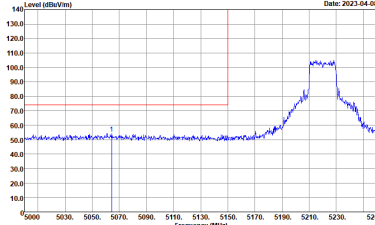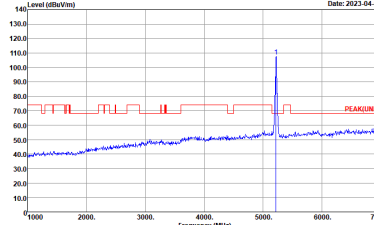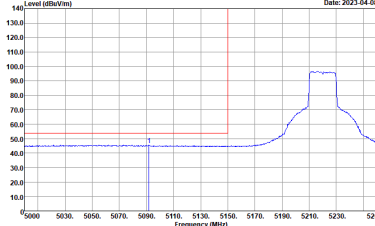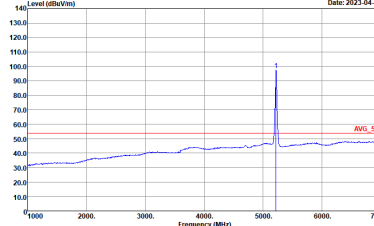





WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11be EHT20 CH44 5220MHz - L	
3+4	Horizontal	Fundamental
Peak	 <p>Site : 03CH13-HY Condition : PEAK_BE_74 3m HORN_L_91200_1326 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Site : 03CH13-HY Condition : PEAK(LINE) 3m HORN_L_91200_1326 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	 <p>Site : 03CH13-HY Condition : AVG_BE_54 3m HORN_L_91200_1326 HORIZONTAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto</p>	 <p>Site : 03CH13-HY Condition : AVG_54 3m HORN_L_91200_1326 HORIZONTAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto</p>

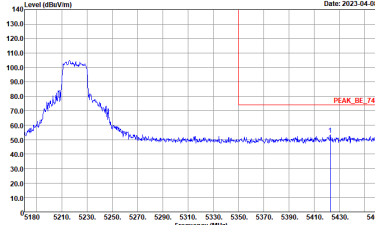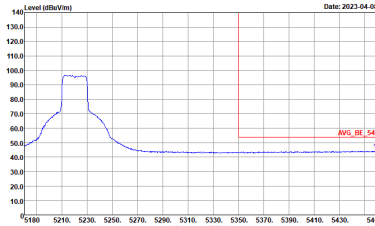



WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11be EHT20 CH44 5220MHz - R	
3+4	Horizontal	Fundamental
Peak	 <p>Site : 03CH13-HY Condition : PEAK_BE_74 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	Left blank
Avg.	 <p>Site : 03CH13-HY Condition : AVG_BE_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto</p>	Left blank



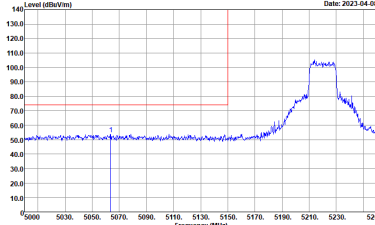
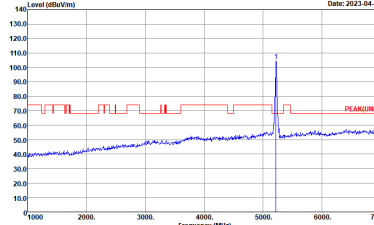
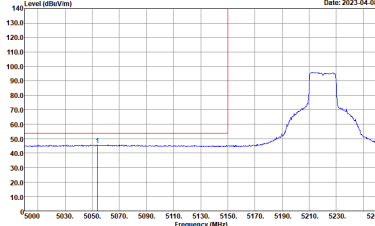
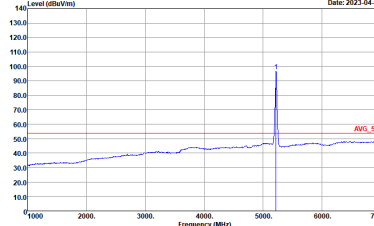


WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11be EHT20 CH44 5220MHz - L	
3+4	Vertical	Fundamental
Peak	 <p>Date: 2023-04-08</p> <p>Site : 03CH13-HY Condition : PEAK_BE_74 3m HORN_L_91200_1326 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Date: 2023-04-08</p> <p>Site : 03CH13-HY Condition : PEAK(LINE)I 3m HORN_L_91200_1326 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	 <p>Date: 2023-04-08</p> <p>Site : 03CH13-HY Condition : AVG_BE_54 3m HORN_L_91200_1326 VERTICAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto</p>	 <p>Date: 2023-04-08</p> <p>Site : 03CH13-HY Condition : AVG_54 3m HORN_L_91200_1326 VERTICAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto</p>

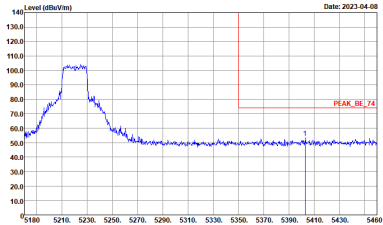
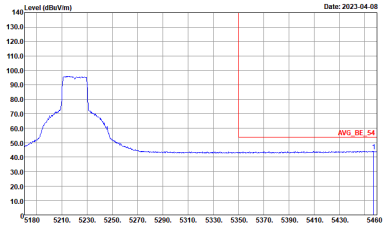


WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11be EHT20 CH44 5220MHz - R	
3+4	Vertical	Fundamental
Peak	 <p>Site : 03CH13-HY Condition : PEAK_BE_74 3m HORN_91200_1326 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	Left blank
Avg.	 <p>Site : 03CH13-HY Condition : AVG_BE_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto</p>	Left blank

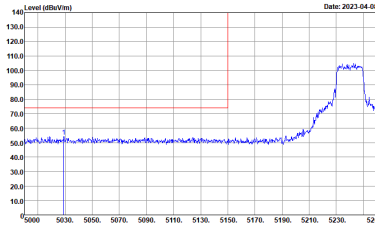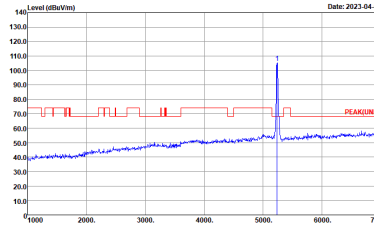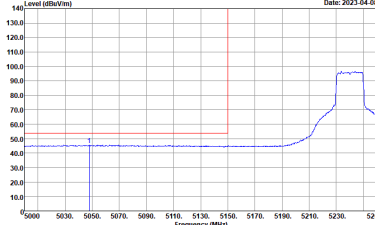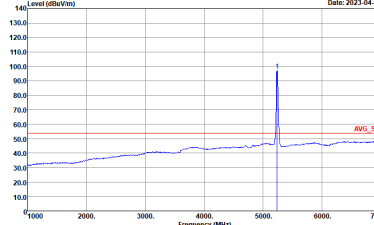

WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11be EHT20 CH48 5240MHz - L	
3+4	Horizontal	Fundamental
Peak	 <p>Site : 03CH13-HY Condition : PEAK_BE_74 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Site : 03CH13-HY Condition : PEAK(LINE) 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	 <p>Site : 03CH13-HY Condition : AVG_BE_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto</p>	 <p>Site : 03CH13-HY Condition : AVG_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto</p>

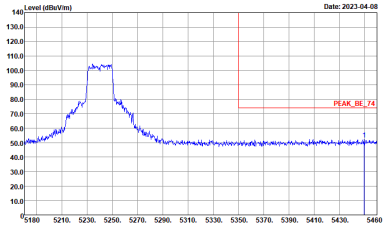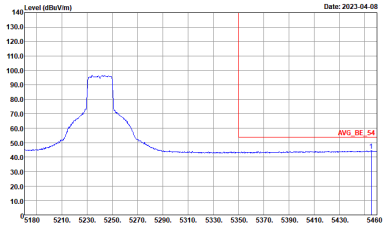

WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11be EHT20 CH48 5240MHz - R	
3+4	Horizontal	Fundamental
Peak	 <p>Site : 03CH13-HY Condition : PEAK_BE_74 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	Left blank
Avg.	 <p>Site : 03CH13-HY Condition : AVG_BE_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto</p>	Left blank







WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11be EHT20 CH48 5240MHz - L	
3+4	Vertical	Fundamental
Peak	<p>Site : 03CH13-HY Condition : PEAK_BE_74 3m HORN_9120D_1326 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	<p>Site : 03CH13-HY Condition : PEAK(LINE)I 3m HORN_9120D_1326 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	<p>Site : 03CH13-HY Condition : AVG_BE_54 3m HORN_9120D_1326 VERTICAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto</p>	<p>Site : 03CH13-HY Condition : AVG_54 3m HORN_9120D_1326 VERTICAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto</p>



WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11be EHT20 CH48 5240MHz - R	
3+4	Vertical	Fundamental
Peak	<p>Site : 03CH13-HY Condition : PEAK_BE_74 3m HORN_91200_1326 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWF:Auto</p>	Left blank
Avg.	<p>Site : 03CH13-HY Condition : AVG_BE_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000KHz VBW:3.000KHz SWF:Auto</p>	Left blank



**Band 1 5150~5250MHz  
WIFI 802.11be EHT40 (Band Edge @ 3m)**

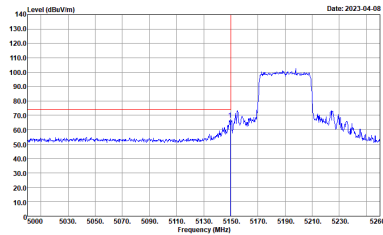
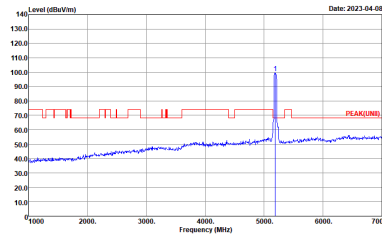
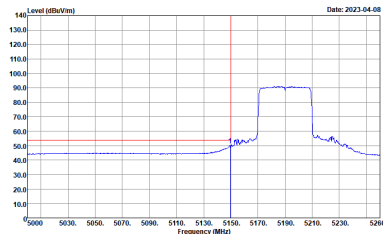
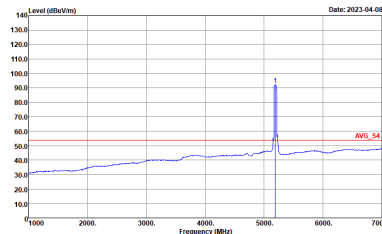
WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11be EHT40 CH38 5190MHz - L	
3+4	Horizontal	Fundamental
Peak	 <p>Site : 03CH13-HY Condition : PEAK_BE_74 3m HORN_9120D_1326 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Site : 03CH13-HY Condition : PEAK(UNIT) 3m HORN_9120D_1326 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	 <p>Site : 03CH13-HY Condition : AVG_BE_54 3m HORN_9120D_1326 HORIZONTAL : RBW:1000.000KHz VBW:1.000KHz SWT:Auto</p>	 <p>Site : 03CH13-HY Condition : AVG_54 3m HORN_9120D_1326 HORIZONTAL : RBW:1000.000KHz VBW:1.000KHz SWT:Auto</p>



WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11be EHT40 CH38 5190MHz - R	
3+4	Horizontal	Fundamental
Peak	<p>Site : 03CH13-HY Condition : PEAK_BE_74 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	Left blank
Avg.	<p>Site : 03CH13-HY Condition : AVG_BE_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000KHz VBW:1000KHz SWT:Auto</p>	Left blank



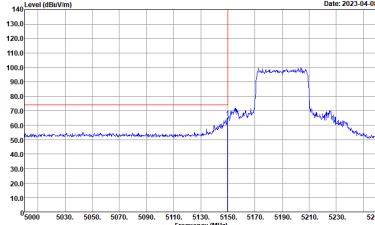
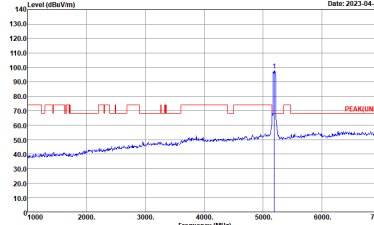
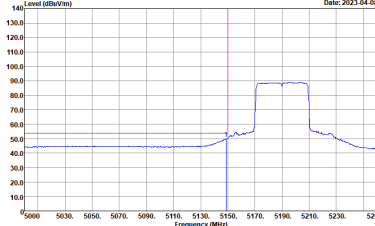
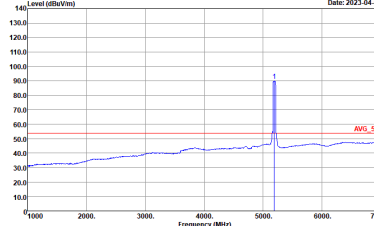


WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11be EHT40 CH38 5190MHz - L	
3+4	Vertical	Fundamental
Peak	 <p>Site : 03CH13-HY Condition : PEAK_BE_74 3m HORN_91200_1326 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Site : 03CH13-HY Condition : PEAK(LINE) 3m HORN_91200_1326 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	 <p>Site : 03CH13-HY Condition : AVG_BE_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000KHz VBW:1000KHz SWT:Auto</p>	 <p>Site : 03CH13-HY Condition : AVG_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000KHz VBW:1000KHz SWT:Auto</p>



WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11be EHT40 CH38 5190MHz - R	
3+4	Vertical	Fundamental
Peak		Left blank
Avg.		Left blank

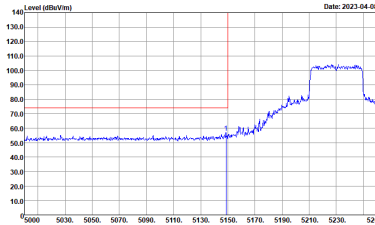
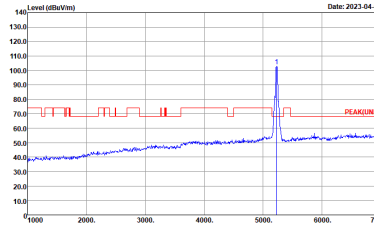
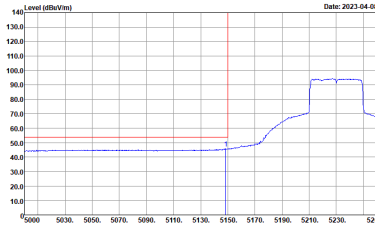
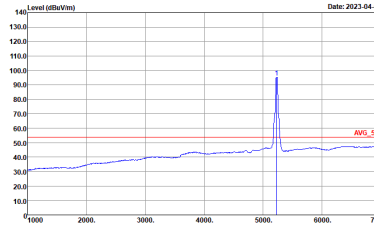


WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11be EHT40 CH46 5230MHz - L	
3+4	Horizontal	Fundamental
Peak	 <p>Level (dBm/100MHz) vs Frequency (MHz) plot showing a peak at 5230 MHz. The y-axis ranges from 10.0 to 140.0 dBm/100MHz, and the x-axis ranges from 5000 to 5260 MHz. A red vertical line marks the peak at 5230 MHz.</p> <p>Site : 03CH13-HY Condition : PEAK_BE_74 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Level (dBm/100MHz) vs Frequency (MHz) plot showing a peak at 5230 MHz. The y-axis ranges from 10.0 to 140.0 dBm/100MHz, and the x-axis ranges from 4000 to 7000 MHz. A red vertical line marks the peak at 5230 MHz.</p> <p>Site : 03CH13-HY Condition : PEAK(LINE)I 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	 <p>Level (dBm/100MHz) vs Frequency (MHz) plot showing an average level at 5230 MHz. The y-axis ranges from 10.0 to 140.0 dBm/100MHz, and the x-axis ranges from 5000 to 5260 MHz. A red vertical line marks the average level at 5230 MHz.</p> <p>Site : 03CH13-HY Condition : AVG_BE_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000KHz VBW:1.000KHz SWT:Auto</p>	 <p>Level (dBm/100MHz) vs Frequency (MHz) plot showing an average level at 5230 MHz. The y-axis ranges from 10.0 to 140.0 dBm/100MHz, and the x-axis ranges from 4000 to 7000 MHz. A red vertical line marks the average level at 5230 MHz.</p> <p>Site : 03CH13-HY Condition : AVG_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000KHz VBW:1.000KHz SWT:Auto</p>



WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11be EHT40 CH46 5230MHz - R	
3+4	Horizontal	Fundamental
Peak	<p>Site : 03CH13-HY Condition : PEAK_BE_74 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	Left blank
Avg.	<p>Site : 03CH13-HY Condition : AVG_BE_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000KHz VBW:1.000KHz SWT:Auto</p>	Left blank

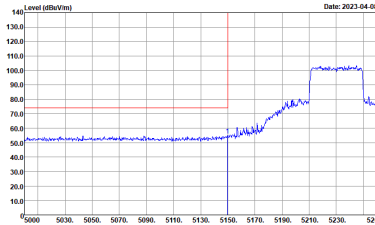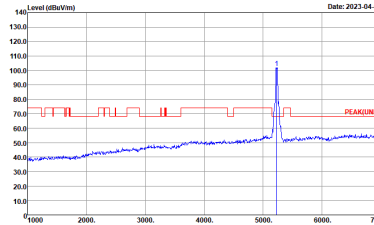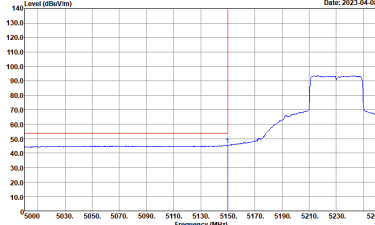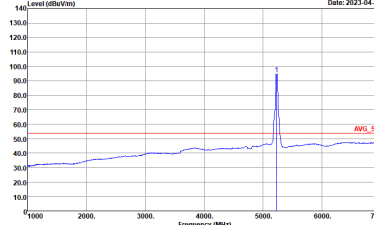





WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11be EHT40 CH46 5230MHz - L	
3+4	Vertical	Fundamental
Peak	 <p>Level (dBm/100MHz) vs Frequency (MHz) plot for Peak Vertical. The plot shows a signal level around 50 dBm/100MHz from 5000 to 5150 MHz, rising to approximately 100 dBm/100MHz between 5150 and 5250 MHz. A red vertical line is at 5150 MHz.</p> <p>Site : 03CH13-HY Condition : PEAK_BE_74 3m HORN_91200_1326 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Level (dBm/100MHz) vs Frequency (MHz) plot for Peak Fundamental. The plot shows a signal level around 50 dBm/100MHz from 1000 to 5000 MHz, with a sharp peak at approximately 5230 MHz reaching about 100 dBm/100MHz. A red vertical line is at 5230 MHz.</p> <p>Site : 03CH13-HY Condition : PEAK(LINE)I 3m HORN_91200_1326 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
	 <p>Level (dBm/100MHz) vs Frequency (MHz) plot for Avg. Vertical. The plot shows a signal level around 50 dBm/100MHz from 5000 to 5150 MHz, rising to approximately 100 dBm/100MHz between 5150 and 5250 MHz. A red vertical line is at 5150 MHz.</p> <p>Site : 03CH13-HY Condition : AVG_BE_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000KHz VBW:1.000KHz SWT:Auto</p>	 <p>Level (dBm/100MHz) vs Frequency (MHz) plot for Avg. Fundamental. The plot shows a signal level around 50 dBm/100MHz from 1000 to 5000 MHz, with a sharp peak at approximately 5230 MHz reaching about 100 dBm/100MHz. A red vertical line is at 5230 MHz.</p> <p>Site : 03CH13-HY Condition : AVG_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000KHz VBW:1.000KHz SWT:Auto</p>
Avg.		





WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11be EHT40 CH46 5230MHz - R	
3+4	Vertical	Fundamental
Peak	<p>Site : 03CH13-HY Condition : PEAK_BE_74 3m HORN_91200_1326 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	Left blank
Avg.	<p>Site : 03CH13-HY Condition : AVG_BE_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000KHz VBW:1.000KHz SWT:Auto</p>	Left blank



**Band 1 5150~5250MHz**  
**WIFI 802.11be EHT80 Full (Band Edge @ 3m)**

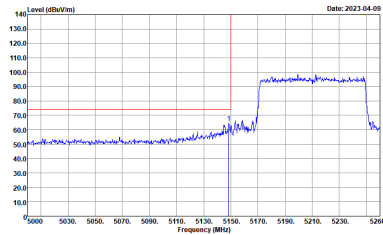
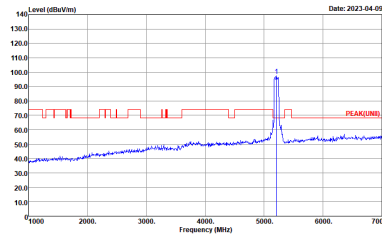
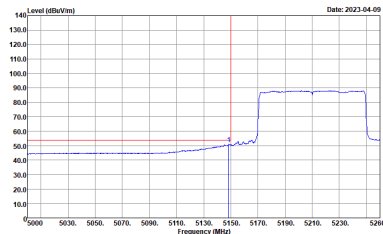
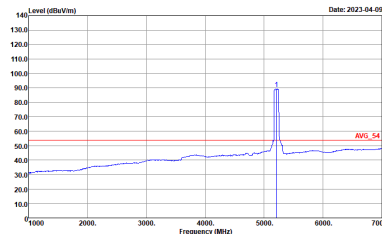
WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11be EHT80 Full CH42 5210MHz - L	
3+4	Horizontal	Fundamental
Peak	 <p>Site : 03CH13-HY            Condition : PEAK_BE_74 3m HORN_91200_1326 HORIZONTAL            : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Site : 03CH13-HY            Condition : PEAK(UNIT) 3m HORN_91200_1326 HORIZONTAL            : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	 <p>Site : 03CH13-HY            Condition : AVG_BE_54 3m HORN_91200_1326 HORIZONTAL            : RBW:1000.000KHz VBW:1.000KHz SWT:Auto</p>	 <p>Site : 03CH13-HY            Condition : AVG_54 3m HORN_91200_1326 HORIZONTAL            : RBW:1000.000KHz VBW:1.000KHz SWT:Auto</p>

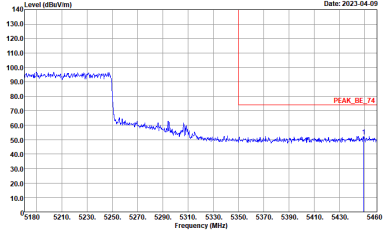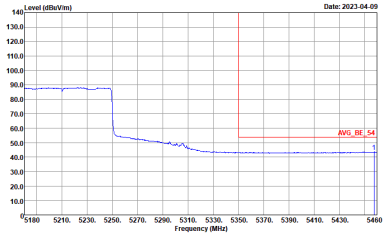

WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11be EHT80 Full CH42 5210MHz - R	
3+4	Horizontal	Fundamental
<p><b>Peak</b></p>	 <p>Site : 03CH13-HY Condition : PEAK_BE_74 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	<p>Left blank</p>
<p><b>Avg.</b></p>	 <p>Site : 03CH13-HY Condition : AVG_BE_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000KHz VBW:1.000KHz SWT:Auto</p>	<p>Left blank</p>



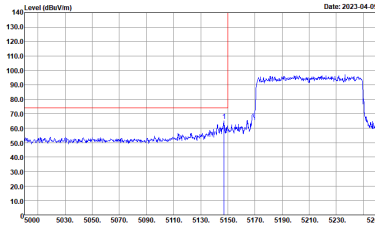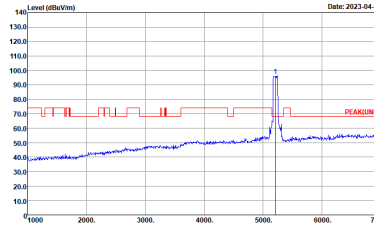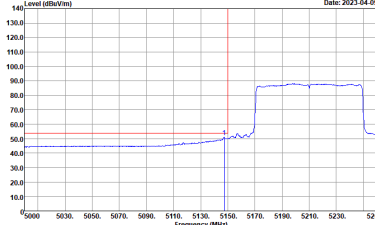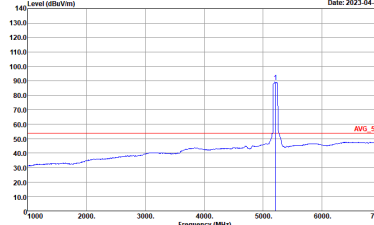





WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11be EHT80 Full CH42 5210MHz - L	
3+4	Vertical	Fundamental
Peak	 <p>Site : 03CH13-HY Condition : PEAK_BE_74 3m HORN_91200_1326 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Site : 03CH13-HY Condition : PEAK(LINE)I 3m HORN_91200_1326 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	 <p>Site : 03CH13-HY Condition : AV6_BE_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000KHz VBW:1.000KHz SWT:Auto</p>	 <p>Site : 03CH13-HY Condition : AV6_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000KHz VBW:1.000KHz SWT:Auto</p>



WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11be EHT80 Full CH42 5210MHz - R	
3+4	Vertical	Fundamental
Peak	<p>Site : 03CH13-HY Condition : PEAK_BE_74 3m HORN_91200_1326 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	Left blank
Avg.	<p>Site : 03CH13-HY Condition : AVG_BE_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000KHz VBW:1.000KHz SWT:Auto</p>	Left blank







**Band 1 5150~5250MHz**  
**WIFI 802.11be EHT160 Full (Band Edge @ 3m)**

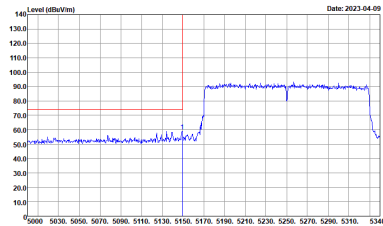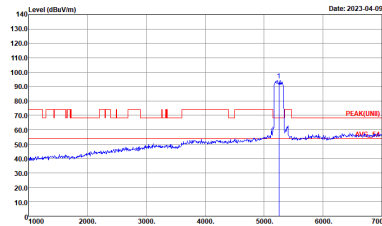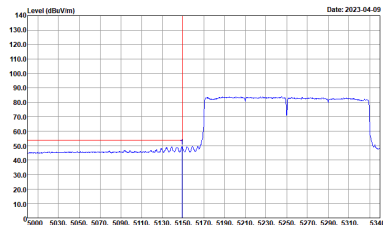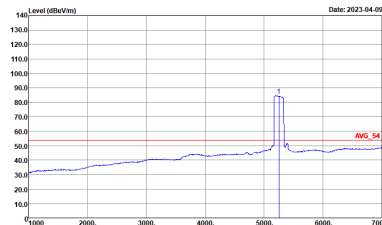WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11be EHT160 Full CH50 5250MHz - L	
3+4	Horizontal	Fundamental
Peak	 <p>Site : 03CH13-HY            Condition : PEAK_BE_74 3m HORN_9120D_1326 HORIZONTAL            : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Site : 03CH13-HY            Condition : PEAK(UNIT) 3m HORN_9120D_1326 HORIZONTAL            : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	 <p>Site : 03CH13-HY            Condition : AVG_BE_54 3m HORN_9120D_1326 HORIZONTAL            : RBW:1000.000KHz VBW:3.000KHz SWT:Auto</p>	 <p>Site : 03CH13-HY            Condition : AVG_54 3m HORN_9120D_1326 HORIZONTAL            : RBW:1000.000KHz VBW:3.000KHz SWT:Auto</p>



WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11be EHT160 Full CH50 5250MHz - R	
3+4	Horizontal	Fundamental
Peak	<p>Site : 03CH13-HY Condition : PEAK_BE_74 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	Left blank
Avg.	<p>Site : 03CH13-HY Condition : AVG_BE_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto</p>	Left blank

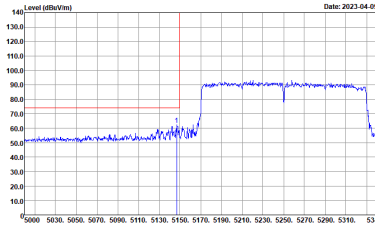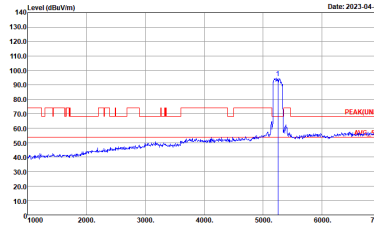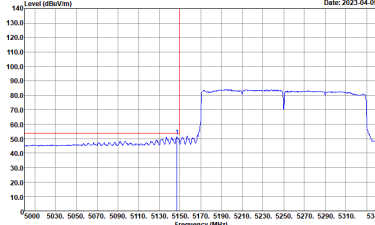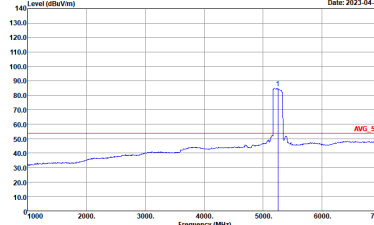

WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11be EHT160 Full CH50 5250MHz - L	
3+4	Vertical	Fundamental
Peak	 <p>Level (dBm/Vm) vs Frequency (MHz) plot showing a peak at 5250 MHz. The y-axis ranges from 10.0 to 140.0 dBm/Vm, and the x-axis ranges from 5000 to 5340 MHz. A red vertical line marks the peak at 5250 MHz.</p> <p>Site : 03CH13-HY Condition : PEAK_BE_74 3m HORN_91200_1326 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Level (dBm/Vm) vs Frequency (MHz) plot showing a peak at 5250 MHz. The y-axis ranges from 10.0 to 140.0 dBm/Vm, and the x-axis ranges from 4000 to 7000 MHz. A red vertical line marks the peak at 5250 MHz.</p> <p>Site : 03CH13-HY Condition : PEAK(LINE)I 3m HORN_91200_1326 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	 <p>Level (dBm/Vm) vs Frequency (MHz) plot showing the average signal. The y-axis ranges from 10.0 to 140.0 dBm/Vm, and the x-axis ranges from 5000 to 5340 MHz. A red vertical line marks the peak at 5250 MHz.</p> <p>Site : 03CH13-HY Condition : AVG_BE_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto</p>	 <p>Level (dBm/Vm) vs Frequency (MHz) plot showing the average signal. The y-axis ranges from 10.0 to 140.0 dBm/Vm, and the x-axis ranges from 4000 to 7000 MHz. A red vertical line marks the peak at 5250 MHz.</p> <p>Site : 03CH13-HY Condition : AVG_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto</p>



WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11be EHT160 Full CH50 5250MHz - R	
3+4	Vertical	Fundamental
Peak	<p>Site : 03CH13-HY Condition : PEAK_BE_74 3m HORN_91200_1326 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	Left blank
Avg.	<p>Site : 03CH13-HY Condition : AVG_BE_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto</p>	Left blank



**Band 1 - 5150~5250MHz**  
**WIFI 802.11a (Harmonic @ 3m)**



<b>WIFI</b>	<b>Band 1 5150~5250MHz Harmonic @ 3m</b>	
<b>ANT</b>	<b>802.11a CH36 5180MHz</b>	
<b>3+4</b>	<b>Horizontal</b>	<b>Vertical</b>
<b>Peak Avg.</b>	<p>Site : 03CH13-HY          Condition : PEAK(UNIT) 3m HORN_91200_1326 HORIZONTAL</p>	<p>Site : 03CH13-HY          Condition : PEAK(UNIT) 3m HORN_91200_1326 VERTICAL</p>



WIFI	Band 1 5150~5250MHz Harmonic @ 3m	
ANT	802.11a CH36 5180MHz	
3+4	Horizontal	Vertical
<p>14.47G ~14.5G Avg.</p>	<p>Date: 2023-04-10</p> <p>Site : 03CH13-HY Condition : AV6_54 3m HORN_91200_1326 HORIZONTAL</p>	<p>Date: 2023-04-10</p> <p>Site : 03CH13-HY Condition : AV6_54 3m HORN_91200_1326 VERTICAL</p>
<p>17.7G ~18G Avg</p>	<p>Date: 2023-04-10</p> <p>Site : 03CH13-HY Condition : AV6_54 3m HORN_91200_1326 HORIZONTAL</p>	<p>Date: 2023-04-10</p> <p>Site : 03CH13-HY Condition : AV6_54 3m HORN_91200_1326 VERTICAL</p>



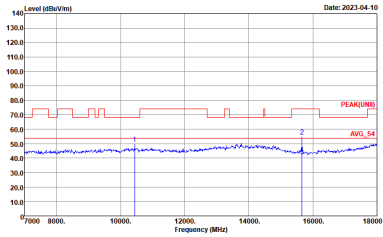
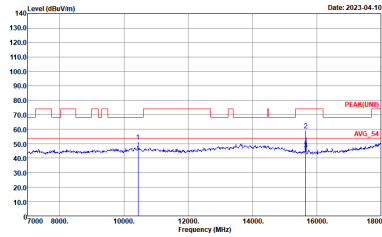


WIFI	Band 1 5150~5250MHz Harmonic @ 3m	
ANT	802.11a CH44 5220MHz	
3+4	Horizontal	Vertical
Peak Avg.	 <p>Site : 03CH13-HY Condition : PEAK(LINE1) 3m HORN_91200_1326 HORIZONTAL</p>	 <p>Site : 03CH13-HY Condition : PEAK(LINE1) 3m HORN_91200_1326 VERTICAL</p>







WIFI	Band 1 5150~5250MHz Harmonic @ 3m	
ANT	802.11a CH44 5220MHz	
3+4	Horizontal	Vertical
<p>14.47G ~14.5G Avg.</p>	<p>Date: 2023-04-10</p> <p>Site : 03CH13-HY Condition : AVG_54 3m HORN_91200_1326 HORIZONTAL</p>	<p>Date: 2023-04-10</p> <p>Site : 03CH13-HY Condition : AVG_54 3m HORN_91200_1326 VERTICAL</p>
<p>17.7G ~18G Avg</p>	<p>Date: 2023-04-10</p> <p>Site : 03CH13-HY Condition : AVG_54 3m HORN_91200_1326 HORIZONTAL</p>	<p>Date: 2023-04-10</p> <p>Site : 03CH13-HY Condition : AVG_54 3m HORN_91200_1326 VERTICAL</p>

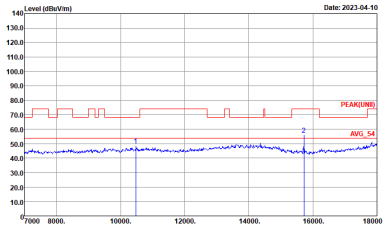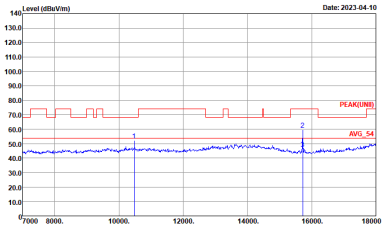

WIFI	Band 1 5150~5250MHz Harmonic @ 3m	
ANT	802.11a CH48 5240MHz	
3+4	Horizontal	Vertical
Peak Avg.	 <p>Site : 03CH13-HY Condition : PEAK(LINE1) 3m HORN_91200_1326 HORIZONTAL</p>	 <p>Site : 03CH13-HY Condition : PEAK(LINE1) 3m HORN_91200_1326 VERTICAL</p>

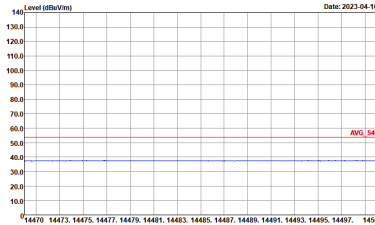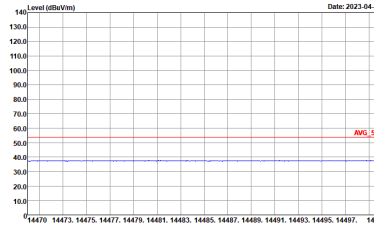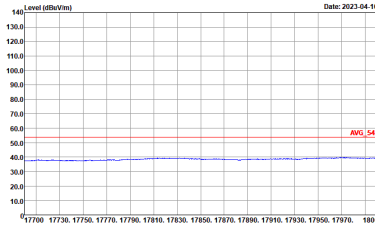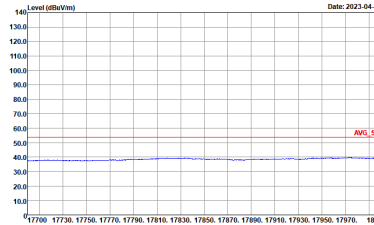

WIFI	Band 1 5150~5250MHz Harmonic @ 3m	
ANT	802.11a CH48 5240MHz	
3+4	Horizontal	Vertical
<p>14.47G ~14.5G Avg.</p>	 <p>Site : 03CH13-HY Condition : AVG_54 3m HORN_91200_1326 HORIZONTAL</p>	 <p>Site : 03CH13-HY Condition : AVG_54 3m HORN_91200_1326 VERTICAL</p>
<p>17.7G ~18G Avg</p>	 <p>Site : 03CH13-HY Condition : AVG_54 3m HORN_91200_1326 HORIZONTAL</p>	 <p>Site : 03CH13-HY Condition : AVG_54 3m HORN_91200_1326 VERTICAL</p>



Band 1 5150~5250MHz  
WIFI 802.11be EHT20 (Harmonic @ 3m)

WIFI	Band 1 5150~5250MHz Harmonic @ 3m	
ANT	802.11be EHT20 CH36 5180MHz	
3+4	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH13-HY Condition : PEAK(UNII) 3m HORN_9120D_1326 HORIZONTAL :</p>	<p>Site : 03CH13-HY Condition : PEAK(UNII) 3m HORN_9120D_1326 VERTICAL :</p>



WIFI	Band 1 5150~5250MHz Harmonic @ 3m	
ANT	802.11be EHT20 CH36 5180MHz	
3+4	Horizontal	Vertical
<p><b>14.47G</b> <b>~14.5G</b> <b>Avg.</b></p>	<p>Date: 2023-04-11</p> <p>Site : 03CH13-HY Condition : AVG_54 3m HORN_9120D_1326 HORIZONTAL</p>	<p>Date: 2023-04-11</p> <p>Site : 03CH13-HY Condition : AVG_54 3m HORN_9120D_1326 VERTICAL</p>
<p><b>17.7G</b> <b>~18G</b> <b>Avg</b></p>	<p>Date: 2023-04-11</p> <p>Site : 03CH13-HY Condition : AVG_54 3m HORN_9120D_1326 HORIZONTAL</p>	<p>Date: 2023-04-11</p> <p>Site : 03CH13-HY Condition : AVG_54 3m HORN_9120D_1326 VERTICAL</p>